ETSI TS 138 133 V17.9.0 (2023-06)

5G;
NR
Requirements for support of radio resource management
(3GPP TS 38.133 version 17.9.0 Release 17)

Reference
RTS/TSGR-0438133vh90

Keywords
5G

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° w061004871

Important notice

The present document can be downloaded from:
https://www.etsi.org/standards-search

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at www.etsi.org/deliver.

Users of the present document should be aware that the document may be subject to revision or change of status.
Information on the current status of this and other ETSI documents is available at
https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx

If you find errors in the present document, please send your comment to one of the following services:
https://portal.etsi.org/People/CommiteeSupportStaff.aspx

If you find a security vulnerability in the present document, please report it through our
Coordinated Vulnerability Disclosure Program:
https://www.etsi.org/standards/coordinated-vulnerability-disclosure

Notice of disclaimer & limitation of liability

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.
No recommendation as to products and services or vendors is made or should be implied.
No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.
In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.
The content of the PDF version shall not be modified without the written authorization of ETSI.
The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2023.
All rights reserved.

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (https://ipr.etsi.org/).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM**® and the GSM logo are trademarks registered and owned by the GSM Association.

Legal Notice

This Technical Specification (TS) has been produced by the ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found under https://webapp.etsi.org/key/queryform.asp.

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the ETSI Drafting Rules (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Contents

Intellectual Property Rights 2
Legal Notice 2
Modal verbs terminology 2
Foreword 119
1 Scope 121
2 References 121
3 Definitions, symbols and abbreviations 122
3.1 Definitions 122
3.2 Symbols 123
3.3 Abbreviations 124
3.4 Test tolerances 127
3.5 Frequency bands grouping 127
3.5.1 Introduction 127
3.5.2 NR operating bands in FR1 127
3.5.2A NR operating bands for satellite access in FR1 128
3.5.3 NR operating bands in FR2 128
3.6 Applicability of requirements in this specification version 129
3.6.1 RRC connected state requirements in DRX 129
3.6.2 Number of serving carriers 130
3.6.2.1 Number of serving carriers for SA 130
3.6.2.2 Number of serving carriers for EN-DC 130
3.6.2.3 Number of serving carriers for NE-DC 130
3.6.2.4 Number of serving carriers for NR-DC 130
3.6.3 Applicability for intra-band FR2 131
3.6.4 Applicability for FR2 UE power classes 131
3.6.5 Applicability for SDL bands 131
3.6.6 Applicability of requirements for NGEN-DC operation 131
3.6.7 Applicability of QCL 131
3.6.9 Applicability of requirements for scheduling availability 132
3.6.10 Applicability of requirements for measurement restrictions 132
3.6.11 Applicability of requirements for Redcap UEs 132
3.6.11.1 RRC connected state requirements in DRX 132
3.6.11.2 Applicability for FR2 Redcap UE power classes 132
3.6.11.3 Applicability of QCL 132
3.6.12 Applicability of requirements for Satellite Access 132
3.6.13 Applicability of requirements for FR2 133
3.6.14 Applicability of requirements for FR2 Power Class 6 133
4 SA: RRC_IDLE state mobility 133
4.1 Cell Selection 133
4.2 Cell Re-selection 133
4.2.1 Introduction 133
4.2.2 Requirements 134
4.2.2.1 UE measurement capability 134
4.2.2.2 Measurement and evaluation of serving cell 134
4.2.2.3 Measurements of intra-frequency NR cells 135
4.2.2.4 Measurements of inter-frequency NR cells 136
4.2.2.5 Measurements of inter-RAT E-UTRAN cells 139
4.2.2.6 Maximum interruption in paging reception 141
4.2.2.7 General requirements 141
4.2.2.8 Minimum requirement at transitions 141
4.2.2.9 Measurements of intra-frequency NR cells for UE configured with relaxed measurement criterion 142
4.2.2.9.1 Introduction 142
4.2.2.9.2 Measurements for UE fulfilling low mobility criterion 142

4.2.2.9.3 Measurements for UE fulfilling not-at-cell edge criterion....143
4.2.2.9.4 Measurements for UE fulfilling low mobility and not-at-cell edge criteria....143
4.2.2.10 Measurements of inter-frequency NR cells for UE configured with relaxed measurement criterion....143
4.2.2.10.1 Introduction....143
4.2.2.10.2 Measurements for UE fulfilling low mobility criterion....144
4.2.2.10.3 Measurements for UE fulfilling not-at-cell edge criterion....145
4.2.2.10.4 Measurements for UE fulfilling low mobility and not-at-cell edge criterion....146
4.2.2.11 Measurements of inter-RAT E-UTRAN cells for UE configured with relaxed measurement criterion....146
4.2.2.11.1 Introduction....146
4.2.2.11.2 Measurements for UE fulfilling low mobility criterion....146
4.2.2.11.3 Measurements for UE fulfilling with not-at-cell edge criterion....147
4.2.2.11.4 Measurements for UE fulfilling low mobility and not-at-cell edge criterion....148
4.2A Cell Re-selection when subject to CCA....149
4.2A.1 Introduction....149
4.2A.2 Requirements....149
4.2A.2.1 UE measurement capability....149
4.2A.2.2 Measurement and evaluation when subject to CCA on the serving cell....150
4.2A.2.3 Measurements of intra-frequency NR cells when subject to CCA on the serving cell and target cell....150
4.2A.2.4 Measurements of inter-frequency NR cells when subject to CCA on the target cell....152
4.2A.2.5 Measurements of inter-RAT E-UTRAN cells when subject to CCA on the serving cell....154
4.2A.2.6 Maximum interruption in paging reception when subject to CCA on the target cell....154
4.2A.2.7 General requirements....154
4.2B Cell Re-selection for RedCap....154
4.2B.1 Introduction....154
4.2B.2 Requirements....154
4.2B.2.1 UE measurement capability for RedCap....154
4.2B.2.1.1 UE measurement capability for 1 Rx RedCap....154
4.2B.2.1.2 UE measurement capability for 2 Rx RedCap....155
4.2B.2.2 Measurement and evaluation of serving cell for RedCap UE....155
4.2B.2.3 Measurements of intra-frequency NR cells for RedCap UE....157
4.2B.2.4 Measurements of inter-frequency NR cells for RedCap UE....159
4.2B.2.5 Measurements of inter-RAT E-UTRAN cells for RedCap UE....162
4.2B.2.6 Maximum interruption in paging reception for RedCap....164
4.2B.2.7 General requirements for RedCap....164
4.2B.2.8 Minimum requirement at transitions....165
4.2B.2.9 Measurements of intra-frequency NR cells for UE configured with relaxed measurement criterion for RedCap....165
4.2B.2.9.1 Introduction....165
4.2B.2.9.2 Measurements for UE fulfilling stationary criterion....166
4.2B.2.9.3 Measurements for a UE fulfilling stationary and not-at-cell edge criteria....169
4.2B.2.9.3A Measurements for a UE fulfilling stationary and Rel-16 not at cell edge criteria....169
4.2B.2.9.4 Measurements for a UE fulfilling low mobility and stationary criteria....169
4.2B.2.9.5 Measurements for a UE fulfilling low mobility criterion and stationary and not-at-cell edge criteria....170
4.2B.2.9.6 Measurements for a UE fulfilling not-at-cell edge criterion and stationary and not-at-cell edge criteria....170
4.2B.2.9.7 Measurements for a UE fulfilling low mobility and not-at-cell edge criteria and stationary and notatcell edge criteria....170
4.2B.2.9.8 Measurements for a UE fulfilling low mobility and not-at-cell edge criteria and stationary criterion....170
4.2B.2.9.9 Measurements for UE fulfilling low mobility criterion....171
4.2B.2.9.10 Measurements for UE fulfilling not-at-cell edge criterion....173
4.2B.2.9.11 Measurements for UE fulfilling low mobility and not-at-cell edge criteria....176
4.2B.2.10 Measurements of inter-frequency NR cells for UE configured with relaxed measurement criterion....176
4.2B.2.10.1 Introduction....176
4.2B.2.10.2 Measurements for UE fulfilling stationary criterion....176
4.2B.2.10.3 Measurements for a UE fulfilling stationary not at cell edge criterion....179
4.2B.2.10.3A Measurements for a UE fulfilling stationary and Rel-16 not at cell edge criterion....179

4.2B.2.10.4 Measurements for a UE fulfilling low mobility and stationary criteria 180
4.2B.2.10.5 Measurements for a UE fulfilling low mobility and stationary not at cell edge criteria 180
4.2B.2.10.6 Measurements for a UE fulfilling not-at-cell edge criterion and stationary not at cell edge criteria 180
4.2B.2.10.7 Measurements for a UE fulfilling low mobility not-at-cell edge criterion and stationary not at cell edge criteria 181
4.2B.2.10.8 Measurements for a UE fulfilling low mobility not-at-cell edge criterion and stationary criteria 181
4.2B.2.10.9 Measurements for UE fulfilling low mobility criterion 181
4.2B.2.10.10 Measurements for UE fulfilling not-at-cell edge criterion 184
4.2B.2.10.11 Measurements for UE fulfilling low mobility and not-at-cell edge criterion 186
4.2B.2.11 Measurements of inter-RAT E-UTRAN cells for UE configured with relaxed measurement criterion 187
4.2B.2.11.1 Introduction 187
4.2B.2.11.2 Measurements for UE fulfilling stationary criterion 187
4.2B.2.11.3 Measurements for a UE fulfilling stationary not at cell edge criterion 189
4.2B.2.11.3A Measurements for a UE fulfilling stationary and Rel-16 not at cell edge criterion 189
4.2B.2.11.4 Measurements for a UE fulfilling low mobility and stationary criteria 189
4.2B.2.11.5 Measurements for a UE fulfilling low mobility and stationary not at cell edge criteria 190
4.2B.2.11.6 Measurements for a UE fulfilling not-at-cell edge criterion and stationary not at cell edge criteria 190
4.2B.2.11.7 Measurements for a UE fulfilling low mobility not-at-cell edge criterion and stationary not at cell edge criteria 190
4.2B.2.11.8 Measurements for a UE fulfilling low mobility not-at-cell edge criterion and stationary criteria 190
4.2B.2.11.9 Measurements for UE fulfilling low mobility criterion 191
4.2B.2.11.10 Measurements for UE fulfilling with not-at-cell edge criterion 192
4.2B.2.11.11 Measurements for UE fulfilling low mobility and not-at-cell edge criterion 193
4.2C Cell Re-selection for NR UE for Satellite Access 194
4.2C.1 Introduction 194
4.2C.2 Requirements 194
4.2C.2.1 UE measurement capability 194
4.2C.2.2 Measurement and evaluation of serving cell 194
4.2C.2.3 Measurements of intra-frequency NR cells 195
4.2C.2.4 Measurements of inter-frequency NR cells 197
4.2C.2.5 Maximum interruption in paging reception 200
4.2C.2.6 Minimum requirement at transitions 201
4.2C.2.7 Measurements of intra-frequency NR cells for UE configured with relaxed measurement criterion 201
4.2C.2.8 Measurements of inter-frequency NR cells for UE configured with relaxed measurement criterion 201
4.2C.2.9 General requirements 201
4.3 Minimization of Drive Tests (MDT) 201
4.3.1 Introduction 201
4.3.2 Measurement Requirements 201
4.3.3 Requirements for Relative Time Stamp Accuracy 202
4.3.4 Requirements for Relative Time Stamp Accuracy for RRC Connection Establishment Failure Log Reporting 202
4.3.5 Requirements for Relative Time Stamp Accuracy for Radio Link Failure and Handover Failure Log Reporting 202
4.3C Minimization of Drive Tests (MDT) for Satellite Access 203
4.3C.1 Introduction 203
4.3C.2 Measurement Requirements 203
4.3C.3 Requirements for Relative Time Stamp Accuracy 203
4.3C.4 Requirements for Relative Time Stamp Accuracy for RRC Connection Establishment Failure Log Reporting 204
4.3C.5 Requirements for Relative Time Stamp Accuracy for Radio Link Failure and Handover Failure Log Reporting 204
4.4 Idle Mode CA/DC Measurements 204
4.4.1 Introduction 204
4.4.2 Measurement Requirements 204
4.4.2.1 Detected cell requirement during state transition and Idle mode 205

4.4.2.2 Measurements of inter-frequency CA/DC candidate cells 205
4.4.2.3 Measurements on serving cell 206
4.4.2.4 Measurements of E-UTRAN inter-RAT DC candidate cells 206

5 SA: RRC_INACTIVE state mobility 208
5.1 Cell Re-selection 208
5.1.1 Introduction 208
5.1.2 Requirements 208
5.1.2.1 UE measurement capability 208
5.1.2.2 Measurement and evaluation of serving cell 208
5.1.2.3 Measurements of intra-frequency NR cells 208
5.1.2.4 Measurements of inter-frequency NR cells 208
5.1.2.5 Measurements of inter-RAT E-UTRAN cells 208
5.1.2.6 Maximum interruption in paging reception 208
5.1.2.7 General requirements 209
5.1A Cell Re-selection with CCA 209
5.1A.1 Introduction 209
5.1A.2 Requirements 209
5.1A.2.1 UE measurement capability 209
5.1A.2.2 Measurement and evaluation when CCA is used on the serving cell 209
5.1A.2.3 Measurements of intra-frequency NR cells when CCA is used on the serving cell and target cell 209
5.1A.2.4 Measurements of inter-frequency NR cells when CCA is used on the target cell 209
5.1A.2.5 Measurements of inter-RAT E-UTRAN cells when CCA is used on the serving cell 209
5.1A.2.6 Maximum interruption in paging reception when CCA is used on the target cell 209
5.1A.2.7 General requirements 209
5.1B Cell Re-selection for RedCap 210
5.1B.1 Introduction 210
5.1B.2 Requirements 210
5.1B.2.1 UE measurement capability 210
5.1B.2.2 Measurement and evaluation of serving cell 210
5.1B.2.3 Measurements of intra-frequency NR cells 211
5.1B.2.4 Measurements of inter-frequency NR cells 212
5.1B.2.5 Measurements of inter-RAT E-UTRAN cells 212
5.1B.2.6 Maximum interruption in paging reception 213
5.1B.2.7 General requirements 213
5.1B.2.8 Minimum requirement at transitions 213
5.1B.2.9 Measurements of intra-frequency NR cells for UE configured with relaxed measurement criterion 213
5.1B.2.10 Measurements of inter-frequency NR cells for UE configured with relaxed measurement criterion 213
5.1B.2.11 Measurements of inter-RAT E-UTRAN cells for UE configured with relaxed measurement criterion 213
5.2 Void 213
5.2B Configured Grant based Small Data Transmissions (CG-SDT) for RedCap 213
5.2B.1 Introduction 213
5.2B.2 Requirements on UE synchronization for small data transmissions for RedCap 214
5.2B.2.2 Scheduling restriction 215
5.2B.2.3 Applicability conditions for SDT 215
5.3 Minimization of Drive Tests (MDT) 215
5.3.1 Introduction 215
5.3.2 Measurement Requirements 215
5.3.3 Requirements for Relative Time Stamp Accuracy 215
5.3.4 Requirements for Relative Time Stamp Accuracy for RRC Connection Establishment Failure Log Reporting 216
5.3.5 Requirements for Relative Time Stamp Accuracy for Radio Link Failure and Handover Failure Log Reporting 216
5.3.6 Requirements for Relative Time Stamp Accuracy for RRC Resume Failure Log Reporting 216
5.3C Minimization of Drive Tests (MDT) for Satellite Access 216
5.3C.1 Introduction 216
5.3C.2 Measurement Requirements 216
5.3C.3 Requirements for Relative Time Stamp Accuracy 216

5.3C.4 Requirements for Relative Time Stamp Accuracy for RRC Connection Establishment Failure Log Reporting 217
5.3C.5 Requirements for Relative Time Stamp Accuracy for Radio Link Failure and Handover Failure Log Reporting 217
5.3C.6 Requirements for Relative Time Stamp Accuracy for RRC Resume Failure Log Reporting 217
5.4 Idle Mode CA/DC Measurements 217
5.4.1 Introduction 217
5.4.2 Measurement Requirements 217
5.4.2.1 Detected cell requirement during state transition and Idle mode 217
5.4.2.2 Measurements of inter-frequency CA/DC candidate cells 217
5.4.2.3 Measurements on serving cell 217
5.4.2.4 Measurements on E-UTRAN inter-RAT DC candidate cells 217
5.5 Configured Grant based Small Data Transmissions (CG-SDT) 218
5.5.1 Introduction 218
5.5.2 Requirements on UE synchronization for small data transmissions 218
5.5.3 TA validation requirements 218
5.5.4 Scheduling restriction 219
5.5.4.1 Scheduling availability of UE performing measurements in TDD bands on FR1 219
5.5.4.2 Scheduling availability of UE performing measurements with a different subcarrier spacing than PDSCH/PDCCH on FR1 219
5.5.4.3 Scheduling availability of UE performing measurements on FR2 219
5.5.5 Applicability conditions for SDT 220
5.6 NR measurements for positioning 220
5.6.1 Introduction 220
5.6.2 RSTD measurements 221
5.6.2.1 Introduction 221
5.6.2.2 Requirements Applicability 221
5.6.2.3 Measurement Capability 221
5.6.2.5 Measurements Period Requirements 222
5.6.3 PRS-RSRP measurements 224
5.6.3.1 Introduction 224
5.6.3.2 Requirements applicability 224
5.6.3.3 Measurement Capability 224
5.6.3.4 Measurement Reporting Requirements 225
5.6.3.5 Measurement Period Requirements 225
5.6.4 UE Rx-Tx time difference measurements 227
5.6.4.1 Introduction 227
5.6.4.2 Requirements Applicability 227
5.6.4.3 Measurement Capability 228
5.6.4.4 Measurement Reporting Requirements 228
5.6.4.5 Measurement Period Requirements 228
5.6.5 PRS-RSRPP measurements 231
5.6.5.1 Introduction 231
5.6.5.2 Requirements applicability 231
5.6.5.3 Measurement capability 231
5.6.5.4 Measurement reporting requirements 231
5.6.5.5 Measurement period requirements 231
5.7 Random access based Small Data Transmissions (RA-SDT) 232
5.7.1 Introduction 232
5.7.2 Requirements for small data transmissions based on 2-step RA 232
5.7.3 Requirements for small data transmissions based on 4-step RA 232

6 RRC_CONNECTED state mobility 232
6.1 Handover 232
6.1.1 NR Handover 232
6.1.1.1 Introduction 232
6.1.1.2 NR FR1 - NR FR1 Handover 232
6.1.1.2.1 Handover delay 232
6.1.1.2.2 Interruption time 232
6.1.1.3 NR FR2- NR FR1 Handover 233
6.1.1.3.1 Handover delay 233
6.1.1.3.2 Interruption time 233

6.1.1.4 NR FR2- NR FR2 Handover 234
6.1.1.4.1 Handover delay 234
6.1.1.4.2 Interruption time 234
6.1.1.5 NR FR1- NR FR2 Handover 235
6.1.1.5.1 Handover delay 235
6.1.1.5.2 Interruption time 235
6.1.2 NR Handover to other RATs 236
6.1.2.1 NR – E-UTRAN Handover 236
6.1.2.1.1 Introduction 236
6.1.2.1.2 Handover delay 236
6.1.2.1.3 Interruption time 236
6.1.2.2 NR – UTRAN Handover 237
6.1.2.2.1 Introduction 237
6.1.2.2.2 Handover delay 237
6.1.2.2.3 Interruption time 237
6.1.3 NR DAPS Handover 238
6.1.3.1 Introduction 238
6.1.3.2 NR FR1 - NR FR1 DAPS Handover 238
6.1.3.2.1 DAPS handover delay 239
6.1.3.2.2 Interruption time 239
6.1.3.3 NR FR2- NR FR1 DAPS Handover 241
6.1.3.3.1 DAPS handover delay 241
6.1.3.3.2 Interruption time 241
6.1.3.4 NR FR1- NR FR2 DAPS Handover 242
6.1.3.4.1 DAPS handover delay 242
6.1.3.4.2 Interruption time 242
6.1.4 NR Conditional Handover 243
6.1.4.1 Introduction 243
6.1.4.2 NR FR1 – NR FR1 conditional handover 243
6.1.4.3 NR FR2 – NR FR1 conditional handover 244
6.1.4.4 NR FR2 – NR FR2 conditional handover 244
6.1.4.4.1 Handover delay 245
6.1.4.4.2 Measurement time 245
6.1.4.4.3 Preparation time 245
6.1.4.4.4 Interruption time 245
6.1.4.5 NR FR1 – NR FR2 conditional handover 246
6.1.5 NR Handover with PSCell 246
6.1.5.1 Introduction 246
6.1.5.2 Handover with PSCell from NR SA to EN-DC 246
6.1.5.2.1 Interruption time for inter-RAT HO from NR to E-UTRAN 247
6.1.5.2.2 PSCell addition in HO with PSCell for NR SA to EN-DC 247
6.1.5.3 HO with PSCell from NE-DC to NE-DC 247
6.1.5.3.1 Handover delay 248
6.1.5.3.2 HO with PSCell - PCell Interruption time 248
6.1.5.3.3 PSCell addition/change in NE-DC to NE-DC HO with PSCell 248
6.1.5.4 HO with PSCell from NR-DC to NR-DC 248
6.1.5.5 Handover with PSCell from NR SA to EN-DC with PSCell using CCA 250
6.1.5.5.1 Introduction 250
6.1.5.5.2 NR SA to EN-DC HO with PSCell- NR to E-UTRA HO Interruption time 250
6.1.5.5.3 NR SA to EN-DC HO with PSCell - NR PSCell Addition Delay requirements 250
6.1A Void 251
6.1A.1 Void 251
6.1A.1.1 Void 251
6.1A.1.2 Void 251
6.1A.1.2.1 Void 251
6.1A.1.2.2 Void 251
6.1B Handover to target cell using CCA 252
6.1B.1 NR Handover 252
6.1B.1.1 Introduction 252
6.1B.1.2 NR FR1 - NR FR1 Handover 252
6.1B.1.2.1 Handover delay 252
6.1B.1.2.2 Interruption time 252

6.1B.1.3 NR FR2-2 NR FR2-2 Handover....253
6.1B.1.3.1 Handover delay....253
6.1B.1.3.2 Interruption time....253
6.1B.1.4 NR FR1- NR FR2-2 Handover....254
6.1B.1.4.1 Handover delay....254
6.1B.1.4.2 Interruption time....254
6.1C Handover for SAN....255
6.1C.1 NR SAN Handover....255
6.1C.1.1 Introduction....255
6.1C.1.2 NR SAN FR1 – NR SAN FR1 Handover....255
6.1C.1.2.1 Handover delay....256
6.1C.1.2.2 Interruption time....256
6.1C.2 NR SAN Conditional Handover....257
6.1C.2.1 Introduction....257
6.1C.2.2 NR SAN FR1 – NR SAN FR1 conditional handover....257
6.1C.2.2.1 Handover delay....257
6.1C.2.2.2 Measurement time....257
6.1C.2.2.3 Preparation time....258
6.1C.2.2.4 Interruption time....258
6.1D Handover for RedCap....259
6.1D.1 NR Handover....259
6.1D.1.1 Introduction....259
6.1D.1.2 NR FR1 - NR FR1 Handover....259
6.1D.1.3 NR FR2- NR FR2 Handover....260
6.1D.2 NR Handover to other RATs....260
6.1D.2.1 NR – E-UTRAN Handover....260
6.2 RRC Connection Mobility Control....260
6.2.1 SA: RRC Re-establishment....260
6.2.1.1 Introduction....260
6.2.1.2 Requirements....260
6.2.1.2.1 UE Re-establishment delay requirement....261
6.2.1A RRC Re-establishment with CCA....262
6.2.1A.1 Introduction....262
6.2.1A.2 Requirements....263
6.2.1A.2.1 UE Re-establishment with CCA delay requirement....263
6.2.1B SA: RRC Re-establishment for RedCap....264
6.2.1B.1 Introduction....264
6.2.1B.2 Requirements....264
6.2.2 Random access....265
6.2.2.1 Introduction....265
6.2.2.2 Requirements for 4-step RA type....265
6.2.2.2.1 Contention based random access....266
6.2.2.2.1.1 Correct behaviour when transmitting Random Access Preamble....266
6.2.2.2.1.2 Correct behaviour when receiving Random Access Response....266
6.2.2.2.1.3 Correct behaviour when not receiving Random Access Response....266
6.2.2.2.1.4 Correct behaviour when receiving an UL grant for msg3 retransmission....266
6.2.2.2.1.5 SA: Correct behaviour when receiving a message over Temporary C-RNTI....266
6.2.2.2.1.6 Correct behaviour when contention Resolution timer expires....266
6.2.2.2.2 Non-Contention based random access....266
6.2.2.2.2.1 Correct behaviour when transmitting Random Access Preamble....266
6.2.2.2.2.2 Correct behaviour when receiving Random Access Response....267
6.2.2.2.2.3 Correct behaviour when not receiving Random Access Response....267
6.2.2.2.3 UE behaviour when configured with supplementary UL....267
6.2.2.3 Requirements for 2-step RA type....267
6.2.2.3.1 Contention based random access....268
6.2.2.3.1.1 Correct behaviour when transmitting MsgA....268
6.2.2.3.1.2 Correct behaviour when receiving MsgB....268
6.2.2.3.1.3 Correct behaviour when not receiving MsgB....268
6.2.2.3.2 Non-Contention based random access....269
6.2.2.3.2.1 Correct behaviour when transmitting MsgA....269
6.2.2.3.2.2 Correct behaviour when receiving MsgB....269
6.2.2.3.2.3 Correct behaviour when not receiving MsgB....269

6.2.2.3.3 UE behaviour when configured with supplementary UL 269
6.2.2A Random access when CCA is used on target frequency 269
6.2.2A.1 Introduction 269
6.2.2A.2 Requirements for 4-step RA type 270
6.2.2A.2.1 Contention based random access 270
6.2.2A.2.1.1 Correct behaviour when transmitting Random Access Preamble 270
6.2.2A.2.1.2 Correct behaviour when receiving Random Access Response 270
6.2.2A.2.1.3 Correct behaviour when not receiving Random Access Response 270
6.2.2A.2.1.4 Correct behaviour when receiving an UL grant for msg3 retransmission 271
6.2.2A.2.1.6 Correct behaviour when contention Resolution timer expires 271
6.2.2A.2.2 Non-Contention based random access 271
6.2.2A.2.2.1 Correct behaviour when transmitting Random Access Preamble 271
6.2.2A.2.2.2 Correct behaviour when receiving Random Access Response 271
6.2.2A.2.2.3 Correct behaviour when not receiving Random Access Response 272
6.2.2A.3 Requirements for 2-step RA type 272
6.2.2A.3.1 Contention based random access 272
6.2.2A.3.1.1 Correct behaviour when transmitting MsgA 272
6.2.2A.3.1.2 Correct behaviour when receiving MsgB 273
6.2.2A.3.1.3 Correct behaviour when not receiving MsgB 273
6.2.2A.3.2 Non-Contention based random access 273
6.2.2A.3.2.1 Correct behaviour when transmitting MsgA 273
6.2.2A.3.2.2 Correct behaviour when receiving MsgB 274
6.2.2A.3.2.3 Correct behaviour when not receiving MsgB 274
6.2.2B Random access for RedCap 274
6.2.2B.1 Introduction 274
6.2.2B.2 Requirements 274
6.2.3 SA: RRC Connection Release with Redirection 275
6.2.3.1 Introduction 275
6.2.3.2 Requirements 275
6.2.3.2.1 RRC connection release with redirection to NR 275
6.2.3.2.2 RRC connection release with redirection to E-UTRAN 276
6.2.3.2.3 RRC connection release with redirection to NR carrier subject to CCA 277
6.2.3A SA: RRC Connection Release with Redirection for RedCap 278
6.2.3A.1 Introduction 278
6.2.3A.2 Requirements 278
6.2.3A.2.1 RRC connection release with redirection to NR 278
6.2.3A.2.2 RRC connection release with redirection to E-UTRAN 278
6.2C RRC Connection Mobility Control for Satellite Access 278
6.2C.1 SA: RRC Re-establishment for Satellite Access 278
6.2C.1.1 Introduction 278
6.2C.1.2 Requirements 279
6.2C.1.2.1 UE Re-establishment delay requirement 279
6.2C.2 Random access for satellite access 280
6.2C.2.1 Introduction 280
6.2C.2.2 Requirements for 4-step RA type 280
6.2C.2.2.1 Contention based random access 281
6.2C.2.2.1.1 Correct behaviour when transmitting Random Access Preamble 281
6.2C.2.2.1.2 Correct behaviour when receiving Random Access Response 281
6.2C.2.2.1.3 Correct behaviour when not receiving Random Access Response 281
6.2C.2.2.1.4 Correct behaviour when receiving an UL grant for msg3 retransmission 281
6.2C.2.2.1.5 SA: Correct behaviour when receiving a message over Temporary C-RNTI 281
6.2C.2.2.1.6 Correct behaviour when contention Resolution timer expires 281
6.2C.2.2.2 Non-Contention based random access 281
6.2C.2.2.2.1 Correct behaviour when transmitting Random Access Preamble 281
6.2C.2.2.2.2 Correct behaviour when receiving Random Access Response 282
6.2C.2.2.2.3 Correct behaviour when not receiving Random Access Response 282
6.2C.2.3 Requirements for 2-step RA type 282
6.2C.2.3.1 Contention based random access 283
6.2C.2.3.1.1 Correct behaviour when transmitting MsgA 283
6.2C.2.3.1.2 Correct behaviour when receiving MsgB 283
6.2C.2.3.1.3 Correct behaviour when not receiving MsgB 283
6.2C.2.3.2 Non-Contention based random access 283

6.2C.2.3.2.1 Correct behaviour when transmitting MsgA 283
6.2C.2.3.2.2 Correct behaviour when receiving MsgB 284
6.2C.2.3.2.3 Correct behaviour when not receiving MsgB 284
6.2C.3 SA: RRC Connection Release with Redirection for Satellite Access 284
6.2C.3.1 Introduction 284
6.2C.3.2 Requirements 284
6.2C.3.2.1 RRC connection release with redirection to NR 284

7 Timing 285
7.1 UE transmit timing 285
7.1.1 Introduction 285
7.1.2 Requirements 285
7.1.2.1 Gradual timing adjustment 287
7.1.2.2 Void 288
7.1.2.3 One shot large UL timing adjustment for FR2 Power Class 6 UE 288
7.1A UE transmit timing for RedCap 288
7.1A.1 Introduction 288
7.1A.2 Requirements 288
7.1A.2.1 Gradual timing adjustment 289
7.1C UE transmit timing for Satellite Access 290
7.1C.1 Introduction 290
7.1C.2 Requirements 290
7.1C.2.1 Gradual timing adjustment 291
7.2 UE timer accuracy 291
7.2.1 Introduction 291
7.2.2 Requirements 291
7.2A UE timer accuracy for RedCap 292
7.2A.1 Introduction 292
7.2A.2 Requirements 292
7.2C UE timer accuracy for satellite access 292
7.2C.1 Introduction 292
7.2C.2 Requirements 292
7.3 Timing advance 293
7.3.1 Introduction 293
7.3.2 Requirements 293
7.3.2.1 Timing Advance adjustment delay 293
7.3.2.2 Timing Advance adjustment accuracy 293
7.3A Timing Advance for RedCap 293
7.3A.1 Introduction 293
7.3A.2 Requirements 293
7.3A.2.1 Timing Advance adjustment delay 293
7.3A.2.2 Timing Advance adjustment accuracy 293
7.3C Timing advance for satellite access 294
7.3C.1 Introduction 294
7.3C.2 Requirements 294
7.3C.2.1 Timing Advance adjustment delay 294
7.3C.2.2 Timing Advance adjustment accuracy 294
7.4 Cell phase synchronization accuracy 294
7.4.1 Definition 294
7.4.2 Minimum requirements 294
7.5 Maximum Transmission Timing Difference 295
7.5.1 Introduction 295
7.5.2 Minimum Requirements for inter-band EN-DC 295
7.5.2.1 Minimum Requirements for inter-band synchronous EN-DC 295
7.5.3 Minimum Requirements for intra-band EN-DC 296
7.5.4 Minimum Requirements for NR Carrier Aggregation 296
7.5.5 Minimum Requirements for inter-band NE-DC 297
7.5.5.1 Minimum Requirements for inter-band synchronous NE-DC 297
7.5.6 Minimum Requirements for inter-band NR DC 297
7.6 Maximum Receive Timing Difference 298
7.6.1 Introduction 298
7.6.2 Minimum Requirements for inter-band EN-DC 298

7.6.2.1 Minimum Requirements for inter-band synchronous EN-DC 299
7.6.3 Minimum Requirements for intra-band EN-DC 299
7.6.4 Minimum Requirements for NR Carrier Aggregation 300
7.6.5 Minimum Requirements for inter-band NE-DC 300
7.6.5.1 Minimum Requirements for inter-band synchronous NE-DC 301
7.6.6 Minimum Requirements for inter-band NR DC 301
7.7 *deriveSSB-IndexFromCell* tolerance 302
7.7.1 Minimum requirements 302
7.7A deriveSSB-IndexFromCell tolerance for RedCap 302
7.7A.1 Minimum requirements 302
7.8 Void 303
7.9 *deriveSSB-IndexFromCellInter-r17* tolerance 303
7.9.1 Minimum requirements 303

8 Signalling characteristics 304
8.1 Radio Link Monitoring 304
8.1.1 Introduction 304
8.1.1.1 Introduction of Requirement on Radio Link Monitoring for UE Configured with Relaxed Measurement Criteria 305
8.1.2 Requirements for SSB based radio link monitoring 305
8.1.2.1 Introduction 306
8.1.2.2 Minimum requirement 306
8.1.2.3 Measurement restrictions for SSB based RLM 310
8.1.2.4 Minimum requirement of SSB based radio link monitoring for UE fulfilling relaxed measurement criteria 310
8.1.3 Requirements for CSI-RS based radio link monitoring 311
8.1.3.1 Introduction 311
8.1.3.2 Minimum requirement 312
8.1.3.3 Measurement restrictions for CSI-RS based RLM 315
8.1.3.4 Minimum requirement of CSI-RS based radio link monitoring for UE fulfilling relaxed measurement criteria 316
8.1.4 Minimum requirement at transitions 317
8.1.5 Minimum requirement for UE turning off the transmitter 317
8.1.6 Minimum requirement for L1 indication 317
8.1.7 Scheduling availability of UE during radio link monitoring 317
8.1.7.1 Scheduling availability of UE performing radio link monitoring with a same subcarrier spacing as PDSCH/PDCCH on FR1 318
8.1.7.2 Scheduling availability of UE performing radio link monitoring with a different subcarrier spacing than PDSCH/PDCCH on FR1 318
8.1.7.3 Scheduling availability of UE performing radio link monitoring on FR2 318
8.1.7.4 Scheduling availability of UE performing radio link monitoring on FR1 or FR2 in case of FR1-FR2 inter-band CA and NR-DC 319
8.1A Radio Link Monitoring with CCA on Target Frequency 319
8.1A.1 Introduction 319
8.1A.2 Requirements for SSB Based Radio Link Monitoring 320
8.1A.2.1 Introduction 320
8.1A.2.2 Minimum Requirement 321
8.1A.3 Minimum requirement at transitions 324
8.1A.4 Minimum requirement for UE turning off the transmitter 324
8.1A.5 Minimum requirement for L1 indication 324
8.1A.6 Scheduling availability of UE during radio link monitoring 324
8.1A.6.3 Scheduling availability of UE performing radio link monitoring on FR2-2 325
8.1A.6.4 Scheduling availability of UE performing radio link monitoring on FR1 or FR2-2 in case of FR1-FR2-2 inter-band CA and NR-DC 325
8.1B Radio Link Monitoring for RedCap 326
8.1B.1 Introduction 326
8.1B.2 Requirements for SSB based radio link monitoring 327
8.1B.2.1 Introduction 327
8.1B.2.2 Minimum requirement 327
8.1B.2.3 Measurement restrictions for SSB based RLM 329
8.1B.3 Requirements for CSI-RS based radio link monitoring 330
8.1B.3.1 Introduction 330

8.1B.3.2 Minimum requirement 331
8.1B.3.3 Measurement restrictions for CSI-RS based RLM 333
8.1B.4 Minimum requirement at transitions 334
8.1B.5 Minimum requirement for UE turning off the transmitter 334
8.1B.6 Minimum requirement for L1 indication 334
8.1B.7 Scheduling availability of UE during radio link monitoring 334
8.1B.7.1 Scheduling availability of UE performing radio link monitoring with a same subcarrier spacing as PDSCH/PDCCH on FR1 335
8.1B.7.2 Scheduling availability of UE performing radio link monitoring with a different subcarrier spacing than PDSCH/PDCCH on FR1 335
8.1B.7.3 Scheduling availability of UE performing radio link monitoring on FR2 335
8.1C Radio Link Monitoring for Satellite Access 335
8.1C.1 Introduction 335
8.1C.2 Requirements for SSB based radio link monitoring 336
8.1C.2.1 Introduction 336
8.1C.2.2 Minimum requirement 337
8.1C.2.3 Measurement restrictions for SSB based RLM 338
8.1C.3 Requirements for CSI-RS based radio link monitoring 338
8.1C.3.1 Introduction 338
8.1C.3.2 Minimum requirement 339
8.1C.3.3 Measurement restrictions for CSI-RS based RLM 340
8.1C.4 Minimum requirement at transitions 340
8.1C.5 Minimum requirement for UE turning off the transmitter 341
8.1C.6 Minimum requirement for L1 indication 341
8.1C.7 Scheduling availability of UE during radio link monitoring 341
8.1C.7.1 Scheduling availability of UE performing radio link monitoring with a same subcarrier spacing as PDSCH/PDCCH on FR1 341
8.1C.7.2 Scheduling availability of UE performing radio link monitoring with a different subcarrier spacing than PDSCH/PDCCH on FR1 341
8.2 Interruption 342
8.2.1 EN-DC Interruption 342
8.2.1.1 Introduction 342
8.2.1.2 Requirements 343
8.2.1.2.1 Interruptions at transitions between active and non-active during DRX 343
8.2.1.2.2 Interruptions at transitions from non-DRX to DRX 343
8.2.1.2.3 Interruptions at SCell addition/release 343
8.2.1.2.4 Interruptions at SCell activation/deactivation 344
8.2.1.2.5 Interruptions during measurements on SCC 345
8.2.1.2.5.1 Interruptions during measurements on deactivated NR SCC 345
8.2.1.2.5.2 Interruptions during measurements on deactivated E-UTRAN SCC 345
8.2.1.2.5.3 Interruptions during CQI measurements on dormant E-UTRAN SCell 346
8.2.1.2.5.4 Interruptions during RRM measurements on dormant E-UTRAN SCC 346
8.2.1.2.6 Interruptions at UL carrier RRC reconfiguration 347
8.2.1.2.7 Interruptions due to Active BWP switching Requirement 347
8.2.1.2.8 Interruptions at direct SCell activation and hibernation 348
8.2.1.2.8.1 Interruptions during direct SCell activation and hibernation of E-UTRA SCell 348
8.2.1.2.8.2 Interruptions during direct SCell activation 348
8.2.1.2.9 Interruptions at SCell hibernation 349
8.2.1.2.10 Interruptions at SCell activation/deactivation with multiple downlink SCells 349
8.2.1.2.11 Interruptions due to UE-specific CBW change 349
8.2.1.2.12 Interruptions at NR SRS carrier based switching 349
8.2.1.2.13 Interruptions at E-UTRA SRS carrier based switching 351
8.2.1.2.14 DL Interruptions at switching between two uplink carriers 351
8.2.1.2.15 Interruptions due to SCell dormancy 352
8.2.1.2.15.1 Interruptions due to SCell dormancy switch 352
8.2.1.2.15.2 Interruptions due to CQI measurements during SCell dormancy 352
8.2.1.2.15.3 Interruptions due to RRM measurements during SCell dormancy 352
8.2.1.2.16 Interruptions when identifying CGI of an NR cell with autonomous gaps 352
8.2.1.2.17 Interruptions when identifying CGI of an E-UTRA cell with autonomous gaps 353
8.2.1.2.18 Interruptions at NR SRS antenna port switching 354
8.2.1.2.19 Interruptions at fast SCell activation 355
8.2.1.2.20 Interruptions due to PUCCH SCell activation/deactivation 355

8.2.2 SA: Interruptions with Standalone NR Carrier Aggregation 356
8.2.2.1 Introduction 356
8.2.2.2 Requirements 356
8.2.2.2.1 Interruptions at SCell addition/release 356
8.2.2.2.2 Interruptions at SCell activation/deactivation 358
8.2.2.2.3 Interruptions during measurements on deactivated SCC 359
8.2.2.2.4 Interruptions at UL carrier RRC reconfiguration 359
8.2.2.2.5 Interruptions due to Active BWP switching Requirement 360
8.2.2.2.6 Interruptions at inter-frequency SFTD measurement 361
8.2.2.2.7 Interruptions at SCell activation/deactivation with multiple downlink SCells 362
8.2.2.2.8 Interruptions due to UE-specific CBW change 362
8.2.2.2.9 Interruptions at NR SRS carrier based switching 362
8.2.2.2.10 DL Interruptions at UE switching between two uplink carriers 364
8.2.2.2.10A DL Interruptions at UE switching between two uplink carriers with two transmit antenna connectors 364
8.2.2.2.10B DL Interruptions at UE switching between one uplink band with one transmit antenna connector and one uplink band with two transmit antenna connectors 365
8.2.2.2.10C DL Interruptions at UE switching between two uplink bands with two transmit antenna connectors 365
8.2.2.2.11 Interruptions at direct SCell activation 365
8.2.2.2.12 Interruptions due to SCell dormancy 366
8.2.2.2.12.1 Interruptions due to SCell dormancy switch 366
8.2.2.2.12.2 Interruptions due to CQI measurements during SCell dormancy 366
8.2.2.2.12.3 Interruptions due to RRM measurements during SCell dormancy 366
8.2.2.2.13 Interruptions at transitions between active and non-active during DRX 366
8.2.2.2.14 Interruptions when identifying CGI of an NR cell with autonomous gaps 366
8.2.2.2.15 Interruptions when identifying CGI of an E-UTRA cell with autonomous gaps 367
8.2.2.2.16 Interruptions at NR SRS antenna port switching 367
8.2.2.2.17 Interruptions at fast SCell activation 368
8.2.2.2.18 Interruptions due to PUCCH SCell activation/deactivation 369
8.2.3 NE-DC Interruptions 369
8.2.3.1 Introduction 369
8.2.3.2 Requirements 370
8.2.3.2.1 Interruptions at transitions between active and non-active during DRX 370
8.2.3.2.2 Interruptions at transitions from non-DRX to DRX 370
8.2.3.2.3 Interruptions at PSCell/SCell addition/release 370
8.2.3.2.4 Interruptions at SCell activation/deactivation 372
8.2.3.2.5 Interruptions during measurements on SCC 373
8.2.3.2.5.1 Interruptions during measurements on deactivated NR SCC 373
8.2.3.2.5.2 Interruptions during measurements on deactivated E-UTRAN SCC 373
8.2.3.2.5.3 Interruptions during CQI measurements on dormant E-UTRAN SCC 373
8.2.3.2.5.4 Interruptions during RRM measurements on dormant E-UTRAN SCC 374
8.2.3.2.6 Interruptions at UL carrier RRC reconfiguration 374
8.2.3.2.7 Interruptions due to Active BWP switching Requirement 374
8.2.3.2.8 Interruptions at direct SCell activation and hibernation 374
8.2.3.2.9 Interruptions at SCell hibernation 375
8.2.3.2.10 Interruptions at SCell activation/deactivation with multiple downlink SCells 375
8.2.3.2.11 Interruptions at NR SRS carrier based switching 375
8.2.3.2.12 Interruptions at E-UTRA SRS carrier based switching 377
8.2.3.2.13 Interruptions due to SCell dormancy 378
8.2.3.2.14 Interruptions when identifying CGI of an NR cell with autonomous gaps 378
8.2.3.2.15 Interruptions when identifying CGI of an E-UTRA cell with autonomous gaps 379
8.2.3.2.17 Interruptions at fast SCell activation 380
8.2.3.2.18 Interruptions due to UE-specific CBW change 381
8.2.3.2.19 Interruptions due to PUCCH SCell activation/deactivation 381
8.2.4 NR-DC: Interruptions 381
8.2.4.1 Introduction 381
8.2.4.2 Requirements 382
8.2.4.2.1 Interruptions at PSCell/SCell addition/release 382
8.2.4.2.2 Interruptions at SCell activation/deactivation 383
8.2.4.2.3 Interruptions during measurements on SCC 384
8.2.4.2.4 Interruptions at UL carrier RRC reconfiguration 384

8.2.4.2.5 Interruptions due to Active BWP switching Requirement 385
8.2.4.2.6 Interruptions at transitions between active and non-active during DRX 385
8.2.4.2.7 Interruptions at transitions from non-DRX to DRX 385
8.2.4.2.8 Interruptions at SCell activation/deactivation with multiple downlink SCells 386
8.2.4.2.9 Interruptions at NR SRS carrier based switching 386
8.2.4.2.10 Interruptions at direct SCell activation 387
8.2.4.2.11 Interruptions when identifying CGI of an NR cell with autonomous gaps 388
8.2.4.2.12 Interruptions when identifying CGI of an E-UTRA cell with autonomous gaps 388
8.2.4.2.13 Interruptions due to SCell dormancy 389
8.2.4.2.14 Interruptions at NR SRS antenna port switching 389
8.2.4.2.15 Interruptions at fast SCell activation 390
8.2.4.2.16 Interruptions at SCG activation/deactivation 391
8.2.4.2.17 Interruptions due to RRM measurements on deactivated SCG 391
8.2.4.2.18 Interruptions during RLM/BFD measurements on deactivated PScell 392
8.2.4.2.19 Interruptions due to UE-specific CBW change 392
8.2.4.2A Void 392
8.2.4.2A.1 Void 392
8.2.4.2A.2 Void 392
8.2.4.2A.3 Void 392
8.3 SCell Activation and Deactivation Delay 392
8.3.1 Introduction 392
8.3.2 SCell Activation Delay Requirement for Deactivated SCell 392
8.3.3 SCell Deactivation Delay Requirement for Activated SCell 397
8.3.4 Direct SCell Activation at SCell addition 397
8.3.5 Direct SCell Activation at Handover 399
8.3.7 SCell Activation Delay Requirement for Deactivated SCell with Multiple Downlink SCells 400
8.3.8 SCell Deactivation Delay Requirement for Activated SCell with Multiple Downlink SCells 404
8.3.9 Direct SCell Activation of Multiple Downlink SCells at SCell addition 405
8.3.10 Direct SCell Activation of Multiple Downlink SCells at Handover 406
8.3.12 SCell Activation Delay Requirement for Deactivated PUCCH SCell 407
8.3.13 SCell activation delay Requirement for Deactivated PUCCH SCell with Multiple SCells 410
8.3.13.1 Introduction 410
8.3.14 SCell Deactivation Delay Requirement for Activated PUCCH SCell 412
8.3.15 SCell Deactivation Delay Requirement for Activated PUCCH SCell with Multiple Downlink SCells 412
8.3.16 Fast SCell Activation Delay Requirement for Deactivated SCell 412
8.3A SCell Activation and Deactivation Delay in Carriers with CCA 415
8.3A.1 Introduction 415
8.3A.2 SCell Activation Delay Requirement for Deactivated SCell 415
8.3A.3 SCell Deactivation Delay Requirement for Activated SCell 420
8.4 UE UL carrier RRC reconfiguration delay 420
8.4.1 Introduction 420
8.4.2 UE UL carrier configuration delay requirement 420
8.4.3 UE UL carrier deconfiguration delay requirement 420
8.5 Link Recovery Procedures 421
8.5.1 Introduction 421
8.5.1.1 Introduction of Requirement on Link Recovery Procedures for UE configured with relaxed measurement criteria 422
8.5.2 Requirements for SSB based beam failure detection 423
8.5.2.1 Introduction 423
8.5.2.2 Minimum requirement 423
8.5.2.3 Measurement restriction for SSB based beam failure detection 426
8.5.2.4 Minimum requirement of SSB based beam failure detection for UE fulfilling relaxed measurement criteria 427
8.5.3 Requirements for CSI-RS based beam failure detection 427
8.5.3.1 Introduction 427
8.5.3.2 Minimum requirement 428
8.5.3.3 Measurement restrictions for CSI-RS beam failure detection 431
8.5.3.4 Minimum requirement of CSI-RS based beam failure detection for UE fulfilling relaxed measurement criteria 432
8.5.4 Minimum requirement for L1 indication 433
8.5.5 Requirements for SSB based candidate beam detection 434
8.5.5.1 Introduction 434

8.5.5.2 Minimum requirement 434
8.5.5.3 Measurement restriction for SSB based candidate beam detection 437
8.5.6 Requirements for CSI-RS based candidate beam detection 437
8.5.6.1 Introduction 437
8.5.6.2 Minimum requirement 437
8.5.6.3 Measurement restriction for CSI-RS based candidate beam detection 440
8.5.7 Scheduling availability of UE during beam failure detection 441
8.5.7.1 Scheduling availability of UE performing beam failure detection with a same subcarrier spacing as PDSCH/PDCCH on FR1 441
8.5.7.2 Scheduling availability of UE performing beam failure detection with a different subcarrier spacing than PDSCH/PDCCH on FR1 441
8.5.7.3 Scheduling availability of UE performing beam failure detection on FR2 441
8.5.7.4 Scheduling availability of UE performing beam failure detection on FR1 or FR2 in case of FR1-FR2 inter-band CA and NR DC 442
8.5.8 Scheduling availability of UE during candidate beam detection 442
8.5.8.1 Scheduling availability of UE performing L1-RSRP measurement with a same subcarrier spacing as PDSCH/PDCCH on FR1 442
8.5.8.2 Scheduling availability of UE performing L1-RSRP measurement with a different subcarrier spacing than PDSCH/PDCCH on FR1 442
8.5.8.3 Scheduling availability of UE performing L1-RSRP measurement on FR2 443
8.5.8.4 Scheduling availability of UE performing L1-RSRP measurement on FR1 or FR2 in case of FR1-FR2 inter-band CA and NR-DC 443
8.5.9 Requirements for Beam Failure Recovery in SCell 443
8.5.9.1 Introduction 443
8.5.9.2 Requirement 444
8.5.10 Minimum requirement at transitions for beam failure detection 444
8.5A Link Recovery Procedures when CCA is used on target frequency 444
8.5A.1 Introduction 444
8.5A.2 Requirements for SSB based beam failure detection 445
8.5A.2.1 Introduction 445
8.5A.2.2 Minimum requirement 445
8.5A.2.3 Measurement restriction for SSB based beam failure detection 448
8.5A.3 Void 448
8.5A.4 Minimum requirement for L1 indication 448
8.5A.5 Requirements for SSB based candidate beam detection 448
8.5A.5.1 Introduction 448
8.5A.5.2 Minimum requirement 448
8.5A.5.3 Measurement restriction for SSB based candidate beam detection 451
8.5A.6 Void 451
8.5A.7 Scheduling availability of UE during beam failure detection 451
8.5A.7.1 Scheduling availability of UE performing beam failure detection with a same subcarrier spacing as PDSCH/PDCCH 451
8.5A.7.2 Scheduling availability of UE performing beam failure detection with a different subcarrier spacing than PDSCH/PDCCH 451
8.5A.7.3 Scheduling availability of UE performing beam failure detection on FR2-2 452
8.5A.7.4 Scheduling availability of UE performing beam failure detection on FR1 or FR2-2 in case of FR1-FR2-2 inter-band CA and NR DC 452
8.5A.8 Scheduling availability of UE during candidate beam detection 452
8.5A.8.3 Scheduling availability of UE performing L1-RSRP measurement on FR2-2 452
8.5.8.4 Scheduling availability of UE performing L1-RSRP measurement on FR1 or FR2-2 in case of FR1-FR2-2 inter-band CA and NR-DC 452
8.5B Link Recovery Procedures for Redcap 452
8.5B.1 Introduction 452
8.5B.2 Requirements for SSB based beam failure detection for Redcap 453
8.5B.2.1 Introduction 453
8.5B.2.2 Minimum requirement 453
8.5B.2.3 Measurement restriction for SSB based beam failure detection 455
8.5B.3 Requirements for CSI-RS based beam failure detection for Redcap 455
8.5B.3.1 Introduction 455
8.5B.3.2 Minimum requirement 456
8.5B.3.3 Measurement restrictions for CSI-RS beam failure detection 458
8.5B.4 Minimum requirement for L1 indication for Redcap 459

8.5B.5 Requirements for SSB based candidate beam detection for Redcap 459
8.5B.5.1 Introduction 459
8.5B.5.2 Minimum requirement 459
8.5B.5.3 Measurement restriction for SSB based candidate beam detection 461
8.5B.6 Requirements for CSI-RS based candidate beam detection for Redcap 461
8.5B.6.1 Introduction 461
8.5B.6.2 Minimum requirement 462
8.5B.6.3 Measurement restriction for CSI-RS based candidate beam detection 464
8.5B.7 Scheduling availability of UE during beam failure detection for Redcap 464
8.5B.7.1 Scheduling availability of UE performing beam failure detection with a same subcarrier spacing as PDSCH/PDCCH on FR1 464
8.5B.7.2 Scheduling availability of UE performing beam failure detection with a different subcarrier spacing than PDSCH/PDCCH on FR1 464
8.5B.7.3 Scheduling availability of UE performing beam failure detection on FR2 464
8.5B.8 Scheduling availability of UE during candidate beam detection for Redcap 465
8.5B.8.1 Scheduling availability of UE performing L1-RSRP measurement with a same subcarrier spacing as PDSCH/PDCCH on FR1 465
8.5B.8.2 Scheduling availability of UE performing L1-RSRP measurement with a different subcarrier spacing than PDSCH/PDCCH on FR1 465
8.5B.8.3 Scheduling availability of UE performing L1-RSRP measurement on FR2 465
8.5B.9 Minimum requirement at transitions for beam failure detection for Redcap 466
8.5C Link Recovery Procedures for Satellite Access 466
8.5C.1 Introduction 466
8.5C.2 Requirements for SSB based beam failure detection 467
8.5C.2.1 Introduction 467
8.5C.2.2 Minimum requirement 467
8.5C.2.3 Measurement restriction for SSB based beam failure detection 468
8.5C.3 Requirements for CSI-RS based beam failure detection 468
8.5C.3.1 Introduction 468
8.5C.3.2 Minimum requirement 469
8.5C.3.3 Measurement restrictions for CSI-RS beam failure detection 470
8.5C.4 Minimum requirement for L1 indication 470
8.5C.5 Requirements for SSB based candidate beam detection 471
8.5C.5.1 Introduction 471
8.5C.5.2 Minimum requirement 471
8.5C.5.3 Measurement restriction for SSB based candidate beam detection 472
8.5C.6 Requirements for CSI-RS based candidate beam detection 472
8.5C.6.1 Introduction 472
8.5C.6.2 Minimum requirement 472
8.5C.6.3 Measurement restriction for CSI-RS based candidate beam detection 473
8.5C.7 Scheduling availability of UE during beam failure detection 474
8.5C.7.1 Scheduling availability of UE performing beam failure detection with a same subcarrier spacing as PDSCH/PDCCH on FR1 474
8.5C.7.2 Scheduling availability of UE performing beam failure detection with a different subcarrier spacing than PDSCH/PDCCH on FR1 474
8.5C.8 Scheduling availability of UE during candidate beam detection 474
8.5C.8.1 Scheduling availability of UE performing L1-RSRP measurement with a same subcarrier spacing as PDSCH/PDCCH on FR1 474
8.5C.8.2 Scheduling availability of UE performing L1-RSRP measurement with a different subcarrier spacing than PDSCH/PDCCH on FR1 474
8.5C.9 Minimum requirement at transitions for beam failure detection 474
8.6 Active BWP switch delay 475
8.6.1 Introduction 475
8.6.2 DCI and timer based BWP switch delay on a single CC 475
8.6.2A DCI based BWP switch delay on multiple CCs 476
8.6.2A.1 Simultaneous DCI based BWP switch delay on multiple CCs 476
8.6.2A.2 Non-simultaneous DCI based BWP switch delay on multiple CCs 478
8.6.2B Timer based BWP switch delay on multiple CCs 478
8.6.2B.1 Simultaneous timer based BWP switch delay on multiple CCs 478
8.6.2B.2 Non-simultaneous timer based BWP switch delay on multiple CCs 479
8.6.3 RRC based BWP switch delay on a single CC 479
8.6.3A RRC based BWP switch delay on multiple CCs 480

8.6.3A.1 Simultaneous RRC based BWP switch delay on multiple CCs 480
8.6.3A.2 Non-simultaneous RRC based BWP switch delay on multiple CCs 481
8.6.4 BWP switch delay on Consistent UL CCA recovery 481
8.6A Active BWP switch delay for RedCap 481
8.6A.1 Introduction 481
8.6A.2 DCI and timer based BWP switch delay on a single CC 482
8.6A.3 RRC based BWP switch delay on a single CC 483
8.6C Active BWP switch delay for satellite access 484
8.6C.1 Introduction 484
8.6C.2 DCI and timer based BWP switch delay on a single CC 484
8.6C.3 RRC based BWP switch delay on a single CC 485
8.7 Void 486
8.8 NE-DC: E-UTRAN PSCell Addition and Release Delay 486
8.8.1 Introduction 486
8.8.2 E-UTRAN PSCell Addition Delay Requirement 486
8.8.3 E-UTRAN PSCell Release Delay Requirement 486
8.9 NR-DC: PSCell Addition and Release Delay 487
8.9.1 Introduction 487
8.9.2 PSCell Addition Delay Requirement 487
8.9.3 PSCell Release Delay Requirement 487
8.9A Conditional PSCell Addition Delay 488
8.9A.1 Introduction 488
8.9A.2 Conditional PSCell Addition Delay Requirement 488
8.9A.2.1 Measurement time 488
8.9B NR-DC: PSCell Addition and Release Delay in Carriers with CCA 489
8.9B.1 Introduction 489
8.9B.2 PSCell Addition Delay Requirement 489
8.9B.3 PSCell Release Delay Requirement 490
8.10 Active TCI state switching delay 490
8.10.3A MAC-CE based TCI state switch delay in HST FR2 scenarios 491
8.10.4 DCI based TCI state switch delay 492
8.10.5 RRC based TCI state switch delay 492
8.10.6 Active TCI state list update delay 493
8.10A Active TCI state switching delay with CCA 493
8.10A.1 Introduction 493
8.10A.2 Known conditions for TCI state 493
8.10A.3 MAC-CE based TCI state switch delay 493
8.10A.4 DCI based TCI state switch delay 494
8.10A.5 RRC based TCI state switch delay 495
8.10A.6 Active TCI state list update delay 495
8.10B Active TCI state switching delay for RedCap 496
8.10B.1 Introduction 496
8.10B.2 Known conditions for TCI state 496
8.10B.3 MAC-CE based TCI state switch delay 496
8.10B.4 DCI based TCI state switch delay 497
8.10B.5 RRC based TCI state switch delay 497
8.10B.6 Active TCI state list update delay 498
8.10C Active TCI state switching delay for satellite access 498
8.10C.1 Introduction 498
8.10C.2 MAC-CE based TCI state switch delay 498
8.10C.4 DCI based TCI state switch delay 498
8.10C.5 RRC based TCI state switch delay 498
8.10C.6 Active TCI state list update delay 499
8.11 PSCell Change 499
8.11A PSCell Change in Carriers with CCA 499
8.11B Conditional PSCell Change 500
8.11B.1 Introduction 500
8.11B.2 Conditoinal PSCell Change delay 500
8.11B.2.1 Measurement time 501
8.11D Conditional PSCell Change in Carriers with CCA 501
8.11D.1 Introduction 501
8.11D.2 Conditional PSCell Change delay 501

8.11D.2.1 Measurement time 502
8.12 Uplink spatial relation switch delay 502
8.12.1 Introduction 502
8.12.2 Known conditions for spatial relation when associated with DL-RS 502
8.12.3 MAC-CE based spatial relation switch delay 503
8.12.4 DCI based spatial relation switch delay 504
8.12.5 RRC based spatial relation switch delay 504
8.12A Uplink spatial relation switch delay for RedCap 504
8.12A.1 Introduction 504
8.12A.2 Known conditions for spatial relation when associated with DL-RS 504
8.12A.3 MAC-CE based spatial relation switch delay 505
8.12A.4 DCI based spatial relation switch delay 506
8.12A.5 RRC based spatial relation switch delay 506
8.12C Uplink spatial relation switch delay for satellite access 506
8.12C.1 Void 507
8.12C.2 Void 507
8.12C.3 Void 507
8.12C.4 Void 507
8.12C.5 Void 507
8.13 UE-specific CBW change 507
8.13.1 Introduction 507
8.13.2 UE-specific CBW change delay 507
8.13A UE-specific CBW change for RedCap 507
8.13A.1 Introduction 507
8.13A.2 UE-specific CBW change delay 507
8.13C UE-specific CBW change for satellite access 508
8.13C.1 Introduction 508
8.13C.2 UE-specific CBW change delay 508
8.14 Pathloss reference signal switching delay 508
8.14.1 Introduction 508
8.14.2 Known conditions for pathloss reference signal 509
8.14.3 MAC-CE based pathloss reference signal switch delay 509
8.14C Pathloss reference signal switching delay for satellite access 509
8.14C.1 Introduction 510
8.14C.2 Known conditions for pathloss reference signal 510
8.14C.3 MAC-CE based pathloss reference signal switch delay 510
8.15 Active downlink TCI state switching delay for unified TCI 511
8.15.1 Introduction 511
8.15.4 DCI based downlink TCI state switch delay 512
8.15.5 Active Downlink TCI state list update delay 513
8.16 Active uplink TCI state switching delay for unified TCI 514
8.16.1 Introduction 514
8.16.4 DCI based uplink TCI state switch delay 516
8.16.5 Active Uplink TCI state list update delay 516
8.17 SCG Activation and Deactivation Delay 518
8.17.1 Introduction 518
8.17.2 SCG Activation Delay Requirement 518
8.17.3 SCG Deactivation Delay Requirement 519
8.18 TRP specific Link Recovery Procedures 519
8.18.1 Introduction 519
8.18.2 Requirements for TRP specific SSB based beam failure detection 520
8.18.2.1 Introduction 520
8.18.2.2 Minimum requirement 520
8.18.2.3 Measurement restriction for SSB based beam failure detection 522
8.18.3 Requirements for CSI-RS based beam failure detection 523
8.18.3.1 Introduction 523
8.18.3.2 Minimum requirement 523
8.18.3.3 Measurement restrictions for CSI-RS beam failure detection 525
8.18.4 Minimum requirement for L1 indication 526
8.18.5 Requirements for SSB based candidate beam detection 526
8.18.5.1 Introduction 526
8.18.5.2 Minimum requirement 526

8.18.5.3 Measurement restriction for SSB based candidate beam detection 528
8.18.6 Requirements for CSI-RS based candidate beam detection 529
8.18.6.1 Introduction 529
8.18.6.2 Minimum requirement 529
8.18.6.3 Measurement restriction for CSI-RS based candidate beam detection 531
8.18.7 Requirements for TRP specific Beam Failure Recovery 532
8.18.7.1 Introduction 532
8.18.7.2 Requirement 532
8.18.8 Scheduling availability of UE during TRP specific beam failure detection 533
8.18.8.1 Scheduling availability of UE performing TRP specific beam failure detection with a same subcarrier spacing as PDSCH/PDCCH on FR1 533
8.18.8.2 Scheduling availability of UE performing TRP specific beam failure detection with a different subcarrier spacing than PDSCH/PDCCH on FR1 533
8.18.8.3 Scheduling availability of UE performing TRP specific beam failure detection on FR2 533
8.18.8.4 Scheduling availability of UE performing TRP specific beam failure detection on FR1 or FR2 in case of FR1-FR2 inter-band CA and NR DC 534
8.18.9 Scheduling availability of UE during TRP specific candidate beam detection 534
8.18.9.1 Scheduling availability of UE performing L1-RSRP measurement with a same subcarrier spacing as PDSCH/PDCCH on FR1 534
8.18.9.2 Scheduling availability of UE performing L1-RSRP measurement with a different subcarrier spacing than PDSCH/PDCCH on FR1 534
8.18.9.3 Scheduling availability of UE performing L1-RSRP measurement on FR2 534
8.18.9.4 Scheduling availability of UE performing L1-RSRP measurement on FR1 or FR2 in case of FR1-FR2 inter-band CA and NR-DC 535
8.19 Pre-configured measurement gap activation/deactivation delay 535
8.19.1 Introduction 535
8.19.2 Pre-configured measurement gap activation/deactivation upon DCI/timer-based BWP switch 535
8.19.2.1 Activation/deactivation upon DCI/timer-based BWP switch delay on a single CC 535
8.19.3 Pre-configured measurement gap activation/deactivation upon SCell activation/deactivation 536
8.19.4 Pre-configured measurement gap activation/deactivation upon RRC reconfiguration 536

9 Measurement Procedure 537
9.1 General measurement requirement 537
9.1.1 Introduction 537
9.1.2 Measurement gap 537
9.1.2.1 EN-DC: Measurement Gap Sharing 546
9.1.2.1a SA: Measurement Gap Sharing 547
9.1.2.1b NE-DC: Measurement Gap Sharing 548
9.1.2.1c NR-DC: Measurement Gap Sharing 548
9.1.3 UE Measurement capability 549
9.1.3.1 EN-DC: Monitoring of multiple layers using gaps 549
9.1.3.1a SA: Monitoring of multiple layers using gaps 550
9.1.3.1b NE-DC: Monitoring of multiple layers using gaps 550
9.1.3.1c NR-DC: Monitoring of multiple layers using gaps 551
9.1.3.2 EN-DC: Maximum allowed layers for multiple monitoring 551
9.1.3.2a SA: Maximum allowed layers for multiple monitoring 552
9.1.3.2b NE-DC: Maximum allowed layers for multiple monitoring 553
9.1.3.2c NR-DC: Maximum allowed layers for multiple monitoring 553
9.1A.3.2 Void 554
9.1.3A UE Measurement capability under operation mode with CCA 554
9.1.3A.1 EN-DC: Monitoring of multiple layers using gaps under CCA 554
9.1.3A.1a SA: Monitoring of multiple layers using gaps under CCA 554
9.1.3A.2 EN-DC: Maximum allowed layers for multiple monitoring under CCA 555
9.1.3A.2a SA: Maximum allowed layers for multiple monitoring under CCA 555
9.1.3C UE Measurement capability under operation mode with satellite access 555
9.1.3C.1a SA: Monitoring of multiple layers using gaps under satellite access 556
9.1.3C.2a SA: Maximum allowed layers for multiple monitoring for SAN 556
9.1.4 Capabilities for Support of Event Triggering and Reporting Criteria 556
9.1.4.1 Introduction 556
9.1.4.2 Requirements 556
9.1.5 Carrier-specific scaling factor 559
9.1.5.1 Monitoring of multiple layers outside gaps 559

9.1.5.1.1 EN-DC mode: carrier-specific scaling factor for SSB-based, CSI-RS based L3 measurements and RSSI and channel occupancy measurements performed outside gaps 562
9.1.5.1.2 SA mode: carrier-specific scaling factor for SSB-based, CSI-RS based L3 measurements and RSSI and channel occupancy measurements performed outside gaps 563
9.1.5.1.3 NR-DC mode: carrier-specific scaling factor for SSB-based and CSI-RS based L3 measurements performed outside gaps 564
9.1.5.1.4 NE-DC mode: carrier-specific scaling factor for SSB-based and CSI-RS based measurements performed outside gaps 564
9.1.5.2 Monitoring of multiple layers within gaps 565
9.1.5.2.1 EN-DC mode: carrier-specific scaling factor for SSB, CSI-RS-based L3 measurements and RSSI and channel occupancy measurements performed within gaps 567
9.1.5.2.2 SA mode: carrier-specific scaling factor for SSB, CSI-RS-based L3 measurements and RSSI and channel occupancy measurements performed within gaps 568
9.1.5.2.3 NE-DC: carrier-specific scaling factor for SSB-based and CSI-RS based L3 measurements performed within gaps 570
9.1.5.2.4 NR-DC: carrier-specific scaling factor for SSB-based and CSI-RS-based L3 measurements performed within gaps 572
9.1.5.2.5 SA mode: carrier-specific scaling factor for PRS-based measurements performed within gaps 574
9.1.5.2.6 NE-DC: carrier-specific scaling factor for PRS-based measurements performed within gaps 574
9.1.5.2.7 NR-DC: carrier-specific scaling factor for PRS-based measurements performed within gaps 574
9.1.5.3 Monitoring of multiple layers within NCSG 575
9.1.5.3.1 SA mode: carrier-specific scaling factor for measurements performed within NCSG 575
9.1.6 Minimum requirement at transitions 576
9.1.7 Pre-configured measurement gap 576
9.1.7.1 Introduction 576
9.1.7.2 Requirements applicability 576
9.1.7.3 Requirements 577
9.1.7.3.1 Requirements for autonomous activation/deactivation mechanism 577
9.1.7.3.2 Requirements for network-controlled activation/deactivation mechanism 578
9.1.7.3.3 Requirements for reception/transmission during activation/deactivation 578
9.1.8 Concurrent measurement gaps 579
9.1.8.1 Introduction 579
9.1.8.2 Requirements 579
9.1.8.3 Collision between concurrent measurement gaps 580
9.1.8.4 Measurement gap related requirements of concurrent measurement gaps 581
9.1.9 Network controlled small gap 581
9.1.9.1 Introduction 581
9.1.9.2 Requirements applicability 582
9.1.10 MUSIM gaps 584
9.1.11 UL gap for Tx power management 585
9.1A General measurement requirement for RedCap 585
9.1A.1 Introduction 585
9.1A.2 Measurement gap 586
9.1A.2.1 SA: Measurement Gap Sharing 589
9.1A.3 UE Measurement capability 590
9.1A.3.1 SA: Monitoring of multiple layers using gaps 590
9.1A.3.2 SA: Maximum allowed layers for multiple monitoring 590
9.1A.4 Capabilities for Support of Event Triggering and Reporting Criteria 590
9.1A.4.1 Introduction 590
9.1A.4.2 Requirements 591
9.1A.5 Carrier-specific scaling factor 591
9.1A.5.1 Monitoring of multiple layers outside gaps 591
9.1A.5.1.1 SA mode: carrier-specific scaling factor for SSB-based measurements performed outside gaps 592
9.1A.5.2 Monitoring of multiple layers within gaps 592
9.1A.5.2.1 SA mode: carrier-specific scaling factor for SSB measurements performed within gaps 592
9.1A.6 Minimum requirement at transitions 593
9.1C General measurement requirement 594
9.1C.1 Introduction 594
9.1C.2 Measurement gap 594
9.1C.8 Concurrent measurement gaps for SAN 596
9.1C.8.1 Introduction 596

9.1C.8.2 Requirements 596
9.1C.8.3 Collision between concurrent measurement gaps 597
9.1C.8.4 Measurement gap related requirements of concurrent measurement gaps 597
9.1C.9 Collision between SMTC and measurement gap for SAN 597
9.1C.9.1 Introduction 597
9.1C.9.2 Collision between SMTCs and measurement gap 597
9.1C.9.3 Collision between multiple SMTCs on a SAN carrier 598
9.2 NR intra-frequency measurements 598
9.2.1 Introduction 598
9.2.2 Requirements applicability 599
9.2.3 Number of cells and number of SSB 599
9.2.3.1 Requirements for FR1 599
9.2.3.2 Requirements for FR2 600
9.2.4 Measurement Reporting Requirements 600
9.2.4.1 Periodic Reporting 600
9.2.4.2 Event-triggered Periodic Reporting 600
9.2.4.3 Event Triggered Reporting 600
9.2.5 Intrafrequency measurements without measurement gaps 601
9.2.5.1 Intrafrequency cell identification 601
9.2.5.2 Measurement period 606
9.2.5.3 Scheduling availability of UE during intra-frequency measurements 608
9.2.5.3.1 Scheduling availability of UE performing measurements in TDD bands on FR1 608
9.2.5.3.2 Scheduling availability of UE performing measurements with a different subcarrier spacing than PDSCH/PDCCH on FR1 609
9.2.5.3.3 Scheduling availability of UE performing measurements on FR2 609
9.2.5.3.4 Scheduling availability of UE performing measurements on FR1 or FR2 in case of FR1-FR2 inter-band CA 611
9.2.5.4 SFTD Measurements between PCell and PSCell 611
9.2.5.4.1 Introduction 611
9.2.5.4.2 SFTD Measurement delay 611
9.2.5.4.3 SFTD Measurement Reporting Delay 612
9.2.6 Intra-frequency measurements with measurement gaps 612
9.2.6.1 Void 612
9.2.6.2 Intra-frequency cell identification 612
9.2.6.3 Intrafrequency Measurement Period 615
9.2.7 Intra-frequency measurements with NCSG 616
9.2.7.1 Intra-frequency cell identification 616
9.2.7.2 Measurement period 618
9.2.7.3 Scheduling availability during intra-frequency measurement with NCSG 619
9.2A NR intra-frequency measurements with CCA 619
9.2A.1 Introduction 619
9.2A.2 Requirements applicability 620
9.2A.3 Number of cells and number of SSB 620
9.2A.3.1 Requirements for FR1 620
9.2A.3.2 Requirements for FR2-2 621
9.2A.4 Measurement Reporting Requirements 621
9.2A.5 Intra-frequency measurements without measurement gaps 622
9.2A.5.2 Measurement period 626
9.2A.5.3 Scheduling availability of UE during intra-frequency measurements 628
9.2A.5.3.1 Scheduling availability of UE performing measurements in TDD bands on FR1 628
9.2A.5.3.2 Scheduling availability of UE performing measurements with a different subcarrier spacing than PDSCH/PDCCH on FR1 628
9.2A.5.3.3 Scheduling availability of UE performing measurements in TDD bands on FR2-2 628
9.2A.6 Intra-frequency measurements with measurement gaps 629
9.2A.6.1 Intra-frequency cell identification 629
9.2A.6.2 Intra-frequency Measurement Period 631
9.2A.7 Intra-frequency RSSI and Channel occupancy measurements 632
9.2A.7.1 Intra-frequency RSSI measurements 632
9.2A.7.2 Intra-frequency Channel occupancy measurements 634
9.2A.7.3 Scheduling restriction during RSSI and Channel Occupancy measurements in FR1 635
9.2A.7.4 Scheduling restriction during RSSI measurements in FR2-2 635
9.2B NR intra-frequency measurements for RedCap 635

9.2B.1 Introduction....635
9.2B.2 Requirements applicability....636
9.2B.3 Number of cells and number of SSB....637
9.2B.3.1 Requirements for FR1....637
9.2B.3.2 Requirements for FR2....637
9.2B.4 Measurement Reporting Requirements....637
9.2B.4.1 Periodic Reporting....637
9.2B.4.2 Event-triggered Periodic Reporting....637
9.2B.4.3 Event Triggered Reporting....637
9.2B.5 Intra-frequency measurements without measurement gaps for RedCap....638
9.2B.5.1 Intra-frequency cell identification....638
9.2B.5.2 Measurement period....640
9.2B.5.3 Scheduling availability of UE during intra-frequency measurements....641
9.2B.5.3.1 Scheduling availability of UE performing measurements in TDD bands on FR1....641
9.2B.5.3.2 Scheduling availability of UE performing measurements with a different subcarrier spacing than PDSCH/PDCCH on FR1....641
9.2B.5.3.3 Scheduling availability of UE performing measurements on FR2....642
9.2B.5.3.4 Scheduling availability of UE performing measurements in HD-FDD bands on FR1....642
9.2B.6 Intra-frequency measurements with measurement gaps....643
9.2B.6.1 Intra-frequency cell identification....643
9.2B.6.2 Intra-frequency Measurement Period....644
9.2C NR intra-frequency measurements for SAN....645
9.2C.1 Introduction....645
9.2C.2 Requirements applicability....646
9.2C.3 Number of cells and number of SSB....646
9.2C.3.1 Requirements for FR1....646
9.2C.4 Measurement Reporting Requirements....646
9.2C.4.1 Periodic Reporting....646
9.2C.4.2 Event-triggered Periodic Reporting....647
9.2C.4.3 Event Triggered Reporting....647
9.2C.5 Intra frequency measurements without measurement gaps....647
9.2C.5.1 Intra frequency cell identification....647
9.2C.5.2 Measurement period....649
9.2C.5.3 Scheduling availability of UE during intra-frequency measurements....650
9.2C.5.3.1 Scheduling availability of UE performing measurements with a different subcarrier spacing than PDSCH/PDCCH on FR1....650
9.2C.5.3.2 Scheduling availability of UE performing measurements on a neighbor cell served by a different satellite in LEO....650
9.2C.6 Intra-frequency measurements with measurement gaps....651
9.2C.6.1 Intra-frequency cell identification....651
9.2C.6.3 Intrafrequency Measurement Period....652
9.3 NR inter-frequency measurements....652
9.3.1 Introduction....652
9.3.2 Requirements applicability....653
9.3.2.1 Void....654
9.3.2.2 Void....654
9.3.3 Number of cells and number of SSB....654
9.3.3.1 Requirements for FR1....654
9.3.3.2 Requirements for FR2....654
9.3.4 Inter-frequency measurement with measurement gaps....654
9.3.4.1 Void....657
9.3.4.2 Void....657
9.3.5 Inter-frequency measurements....657
9.3.5.1 Void....659
9.3.5.2 Void....659
9.3.5.3 Void....659
9.3.6 Inter-frequency measurements reporting requirements....659
9.3.6.1 Periodic Reporting....659
9.3.6.2 Event-triggered Periodic Reporting....659
9.3.6.3 Event-triggered Reporting....659
9.3.7 Void....660
9.3.8 Inter-frequency SFTD measurement requirements....660

9.3.8.1 Introduction 660
9.3.8.2 SFTD Measurement delay 660
9.3.8.3 SFTD Measurement reporting delay 661
9.3.9 Inter frequency measurements without measurement gaps 661
9.3.9.1 Inter frequency Cell identification 661
9.3.9.2 Measurement period 664
9.3.9.3 Scheduling availability of UE during inter-frequency measurements 665
9.3.9.3.1 Scheduling availability of UE performing measurements in TDD bands on FR1 665
9.3.9.3.2 Scheduling availability of UE performing measurements with a different subcarrier spacing than PDSCH/PDCCH on FR1 666
9.3.9.3.3 Scheduling availability of UE performing measurements on FR2 666
9.3.9.3.4 Scheduling availability of UE performing measurements on FR1 or FR2 in case of FR1-FR2 inter-band CA 667
9.3.10 Inter-frequency measurement with NCSG 667
9.3.10.1 Inter-frequency cell identification 667
9.3.10.2 Measurement period 668
9.3.10.3 Scheduling availability during inter-frequency measurement with NCSG 669
9.3.10.3.1 Scheduling availability of UE performing measurements in TDD bands on FR1 669
9.3.10.3.2 Scheduling availability of UE performing measurements with a different subcarrier spacing than PDSCH/PDCCH on FR1 670
9.3.10.3.3 Scheduling availability of UE performing measurements on FR2 670
9.3.10.3.4 Scheduling availability of UE performing measurements on FR1 or FR2 in case of FR1-FR2 inter-band CA 672
9.3A NR inter-frequency measurements in carrier frequencies with CCA 672
9.3A.1 Introduction 672
9.3A.2 Requirements applicability 673
9.3A.3 Number of cells and number of SSB 673
9.3A.3.1 Requirements for FR1 673
9.3A.3.2 Requirements for FR2-2 674
9.3A.4 Inter-frequency cell identification 674
9.3A.5 Inter-frequency measurements 676
9.3A.6 NR Inter-frequency measurements reporting requirements 677
9.3A.6.1 Periodic Reporting 677
9.3A.6.2 Event-triggered Periodic Reporting 677
9.3A.6.3 Event-triggered Reporting 677
9.3A.8 Inter-frequency RSSI measurements 678
9.3A.9 Inter-frequency channel occupancy measurements 679
9.3B NR inter-frequency measurements for RedCap 679
9.3B.1 Introduction 679
9.3B.2 Requirements applicability 680
9.3B.3 Number of cells and number of SSB 680
9.3B.3.1 Requirements for FR1 680
9.3B.3.2 Requirements for FR2 680
9.3B.4 Inter-frequency measurement with measurement gaps 681
9.3B.5 Inter-frequency measurements 682
9.3B.6 Inter-frequency measurements reporting requirements 683
9.3B.6.1 Periodic Reporting 683
9.3B.6.2 Event-triggered Periodic Reporting 683
9.3B.6.3 Event-triggered Reporting 683
9.3B.7 Inter frequency measurements without measurement gaps 684
9.3B.7.1 Inter frequency Cell identification 684
9.3B.7.2 Measurement period 686
9.3B.7.3 Scheduling availability of UE during inter-frequency measurements 687
9.3B.7.3.1 Scheduling availability of UE performing measurements in TDD bands on FR1 687
9.3B.7.3.2 Scheduling availability of UE performing measurements with a different subcarrier spacing than PDSCH/PDCCH on FR1 687
9.3B.7.3.3 Scheduling availability of UE performing measurements on FR2 688
9.3B.7.3.4 Scheduling availability of UE performing measurements in HD-FDD bands on FR1 688
9.3C NR inter-frequency measurements for SAN 688
9.3C.1 Introduction 688
9.3C.2 Requirements applicability 689
9.3C.3 Number of cells and number of SSB 689

9.3C.3.1 Requirements for FR1 689
9.3C.4 Inter-frequency measurement with measurement gaps 689
9.3C.5 Inter-frequency measurements 691
9.3C.6 Inter-frequency measurements reporting requirements 691
9.3C.6.1 Periodic Reporting 691
9.3C.6.2 Event-triggered Periodic Reporting 691
9.3C.6.3 Event-triggered Reporting 691
9.3C.7 Inter frequency measurements without measurement gaps 692
9.3C.7.1 Inter frequency Cell identification 692
9.3C.7.2 Measurement period 694
9.3C.7.3 Scheduling availability of UE during inter-frequency measurements 694
9.3C.7.3.1 Scheduling availability of UE performing measurements in TDD bands on FR1 694
9.3C.7.3.2 Scheduling availability of UE performing measurements with a different subcarrier spacing than PDSCH/PDCCH on FR1 695
9.4 Inter-RAT measurements 695
9.4.1 Introduction 695
9.4.2 NR − E-UTRAN FDD measurements 697
9.4.2.1 Introduction 697
9.4.2.2 Requirements when no DRX is used 697
9.4.2.3 Requirements when DRX is used 698
9.4.2.4 Measurement reporting requirements 700
9.4.2.4.1 Periodic Reporting 700
9.4.2.4.2 Event-Triggered Periodic Reporting 700
9.4.2.4.3 Event-Triggered Reporting 700
9.4.3 NR − E-UTRAN TDD measurements 701
9.4.3.1 Introduction 701
9.4.3.2 Requirements when no DRX is used 701
9.4.3.3 Requirements when DRX is used 702
9.4.3.4 Measurement reporting requirements 704
9.4.3.4.1 Periodic Reporting 704
9.4.3.4.2 Event-Triggered Periodic Reporting 704
9.4.3.4.3 Event-Triggered Reporting 704
9.4.3.5 Scheduling Availability During NR − E-UTRAN TDD measurements with NCSG 705
9.4.4 Inter-RAT RSTD measurements 705
9.4.4.1 NR − E-UTRAN FDD RSTD measurements 705
9.4.4.1.1 Introduction 705
9.4.4.1.2 Requirements 705
9.4.4.2 NR − E-UTRAN TDD RSTD measurements 708
9.4.4.2.1 Introduction 708
9.4.4.2.2 Requirements 709
9.4.5 Inter-RAT E-CID measurements 712
9.4.5.1 NR−E-UTRAN FDD E-CID RSRP and RSRQ measurements 712
9.4.5.1.1 Introduction 712
9.4.5.1.2 Requirements 712
9.4.5.1.3 Measurement Reporting Delay 712
9.4.5.2 NR−E-UTRAN TDD E-CID RSRP and RSRQ measurements 713
9.4.5.2.1 Introduction 713
9.4.5.2.2 Requirements 713
9.4.5.2.3 Measurement Reporting Delay 713
9.4.6 NR − UTRAN FDD measurements 713
9.4.6.1 Introduction 713
9.4.6.2 Requirements when no DRX is used 713
9.4.6.3 Requirements when DRX is used 714
9.4.7 NR – E-UTRAN measurements with autonomous gaps 716
9.4.7.1 CGI identification of an E-UTRA cell with autonomous gaps 716
9.4A Inter-RAT measurements for RedCap 717
9.4A.1 Introduction 717
9.4A.2 NR − E-UTRAN FDD measurements 718
9.4A.2.1 Introduction 718
9.4A.2.2 Requirements when no DRX is used 718
9.4A.2.3 Requirements when DRX is used 719
9.4A.2.4 Measurement reporting requirements 720

9.4A.2.4.1 Periodic Reporting 720
9.4A.2.4.2 Event-Triggered Periodic Reporting 720
9.4A.2.4.3 Event-Triggered Reporting 720
9.4A.3 NR − E-UTRAN TDD measurements 721
9.4A.3.1 Introduction 721
9.4A.3.2 Requirements when no DRX is used 721
9.4A.3.3 Requirements when DRX is used 723
9.4A.3.4 Measurement reporting requirements 724
9.4A.3.4.1 Periodic Reporting 724
9.4A.3.4.2 Event-Triggered Periodic Reporting 724
9.4A.3.4.3 Event-Triggered Reporting 724
9.4A.4 NR – E-UTRAN measurements with autonomous gaps 725
9.4A.4.1 CGI identification of an E-UTRA cell with autonomous gaps 725
9.4A.4.2 CGI reporting delay 725
9.4A.4.3 CGI reporting scheduling restriction 726
9.5 L1-RSRP measurements for Reporting 726
9.5.1 Introduction 726
9.5.2 Requirements applicability 726
9.5.3 Measurement Reporting Requirements 727
9.5.3.1 Periodic Reporting 727
9.5.3.2 Semi-Persistent Reporting 727
9.5.3.3 Aperiodic Reporting 728
9.5.4 L1-RSRP measurement requirements 728
9.5.4.1 SSB based L1-RSRP Reporting 728
9.5.4.2 CSI-RS based L1-RSRP Reporting 731
9.5.4A Void 734
9.5.4A.1 Void 734
9.5.5 Measurement restriction for CSI-RS and SSB for L1-RSRP measurement 735
9.5.5.1 Measurement restriction for SSB based L1-RSRP 735
9.5.5.2 Measurement restriction for CSI-RS based L1-RSRP 735
9.5.6 Scheduling availability of UE during L1-RSRP measurement 736
9.5.6.1 Scheduling availability of UE performing L1-RSRP measurement with a same subcarrier spacing as PDSCH/PDCCH on FR1 736
9.5.6.2 Scheduling availability of UE performing L1-RSRP measurement with a different subcarrier spacing than PDSCH/PDCCH on FR1 736
9.5.6.3 Scheduling availability of UE performing L1-RSRP measurement on FR2 736
9.5.6.4 Scheduling availability of UE performing L1-RSRP measurement on FR1 or FR2 in case of FR1-FR2 inter-band CA 738
9.5A L1-RSRP measurements for Reporting under CCA 738
9.5A.1 Introduction 738
9.5A.2 Requirements applicability 739
9.5A.3 Measurement Reporting Requirements 739
9.5A.3.1 Periodic Reporting 739
9.5A.3.2 Semi-Persistent Reporting 739
9.5A.3.3 Aperiodic Reporting 740
9.5A.4 L1-RSRP measurement requirements 740
9.5A.4.1 SSB based L1-RSRP Reporting 740
9.5A.5 Measurement restriction for L1-RSRP measurement 742
9.5A.5.1 Measurement restriction for SSB based L1-RSRP 743
9.5A.6 Scheduling availability of UE during L1-RSRP measurement 743
9.5A.6.1 Scheduling availability of UE performing L1-RSRP measurement with a same subcarrier spacing as PDSCH/PDCCH on FR1 743
9.5A.6.2 Scheduling availability of UE performing L1-RSRP measurement with a different subcarrier spacing than PDSCH/PDCCH on FR1 743
9.5A.6.3 Scheduling availability of UE performing L1-RSRP measurement in case of FR1-FR2 inter-band CA 743
9.5A.6.3 Scheduling availability of UE performing L1-RSRP measurement on FR2-2 743
9.5A.6.4 Scheduling availability of UE performing L1-RSRP measurement on FR1 or FR2 in case of FR1-FR2 inter-band CA 744
9.5B L1-RSRP measurements for Reporting for RedCap 744
9.5B.1 Introduction 744
9.5B.2 Requirements applicability 744

9.5B.3 Measurement Reporting Requirements 745
9.5B.3.1 Periodic Reporting 745
9.5B.3.2 Semi-Persistent Reporting 746
9.5B.3.3 Aperiodic Reporting 746
9.5B.4 L1-RSRP measurement requirements 746
9.5B.4.1 SSB based L1-RSRP Reporting 746
9.5B.4.2 CSI-RS based L1-RSRP Reporting 748
9.5B.5 Measurement restriction for CSI-RS and SSB for L1-RSRP measurement 751
9.5B.5.1 Measurement restriction for SSB based L1-RSRP 751
9.5B.5.2 Measurement restriction for CSI-RS based L1-RSRP 751
9.5B.6 Scheduling availability of UE during L1-RSRP measurement 752
9.5B.6.1 Scheduling availability of UE performing L1-RSRP measurement with a same subcarrier spacing as PDSCH/PDCCH on FR1 752
9.5B.6.2 Scheduling availability of UE performing L1-RSRP measurement with a different subcarrier spacing than PDSCH/PDCCH on FR1 752
9.5B.6.3 Scheduling availability of UE performing L1-RSRP measurement on FR2 752
9.5C L1-RSRP measurements for Reporting for satellite access 753
9.5C.1 Introduction 753
9.5C.3 Measurement Reporting Requirements 753
9.5C.3.1 Periodic Reporting 754
9.5C.3.2 Semi-Persistent Reporting 754
9.5C.3.3 Aperiodic Reporting 754
9.5C.4 L1-RSRP measurement requirements 754
9.5C.4.1 SSB based L1-RSRP Reporting 754
9.5C.5 Measurement restriction for L1-RSRP measurement 756
9.5C.5.1 Measurement restriction for SSB based L1-RSRP 756
9.5C.5.2 Measurement restriction for CSI-RS based L1-RSRP 756
9.5C.6 Scheduling availability of UE during L1-RSRP measurement 757
9.5C.6.1 Scheduling availability of UE performing L1-RSRP measurement with a same subcarrier spacing as PDSCH/PDCCH on FR1 757
9.5C.6.2 Scheduling availability of UE performing L1-RSRP measurement with a different subcarrier spacing than PDSCH/PDCCH on FR1 757
9.6 NE-DC: Measurements 757
9.6.1 Introduction 757
9.6.2 SFTD Measurements 757
9.6.2.1 Introduction 757
9.6.2.2 SFTD Measurement requirements 758
9.7 Cross Link Interference measurements 758
9.7.1 Introduction 758
9.7.2 SRS-RSRP measurements 759
9.7.2.1 Introduction 759
9.7.2.2 Requirements applicability 759
9.7.2.3 Measurement Reporting Requirements 759
9.7.2.3.1 Periodic Reporting 759
9.7.2.3.2 Event-triggered Periodic Reporting 759
9.7.2.3.3 Event Triggered Reporting 759
9.7.2.4 Measurement capability 760
9.7.2.5 SRS-RSRP measurement period 760
9.7.3 CLI-RSSI measurements 760
9.7.3.1 Introduction 760
9.7.3.2 Requirements applicability 760
9.7.3.3 Measurement Reporting Requirements 760
9.7.3.3.1 Periodic Reporting 760
9.7.3.3.2 Event-triggered Periodic Reporting 761
9.7.3.3.3 Event Triggered Reporting 761
9.7.3.4 Measurement capability 761
9.7.3.5 CLI-RSSI measurement period 761
9.7.4 Scheduling availability of UE during CLI measurements 761
9.7.4.1 Scheduling availability of UE performing measurement on FR1 761
9.7.4.2 Scheduling availability of UE performing measurement on FR2 762
9.8 L1-SINR measurements for Reporting 762
9.8.1 Introduction 762

9.8.2 Requirements applicability 763
9.8.3 Measurement Reporting Requirements 763
9.8.3.1 Periodic Reporting 764
9.8.3.2 Semi-Persistent Reporting 764
9.8.4 L1-SINR measurement requirements 764
9.8.4.1 L1-SINR reporting with CSI-RS based CMR and no dedicated IMR configured 764
9.8.4.3 L1-SINR reporting with CSI-RS based CMR and dedicated IMR configured 769
9.8.5 Measurement restriction for L1-SINR measurement 771
9.8.5.1 Measurement restriction if SSB configured for L1-SINR Measurement 771
9.8.5.2 Measurement restriction if CSI-RS configured for L1-SINR measurement 771
9.8.5.3 Measurement restriction if CSI-IM configured for L1-SINR measurement 772
9.8.6 Scheduling availability of UE during L1-SINR measurement 772
9.8.6.1 Scheduling availability of UE performing L1-SINR measurement with a same subcarrier spacing as PDSCH/PDCCH on FR1 773
9.8.6.2 Scheduling availability of UE performing L1-SINR measurement with a different subcarrier spacing than PDSCH/PDCCH on FR1 773
9.8.6.4 Scheduling availability of UE performing L1-SINR measurement on FR1 or FR2 in case of FR1-FR2 inter-band CA 774
9.9 NR measurements for positioning 774
9.9.1 Introduction 774
9.9.1.1 General Aspects of Gap-based Measurement 774
9.9.1.2 General Aspects of Gapless Measurement 775
9.9.1.3 Scheduling Availability of UE during PRS Measurement without Measurement Gaps 775
9.9.2 RSTD measurements 776
9.9.2.1 Introduction 776
9.9.2.2 Requirements Applicability 776
9.9.2.3 Measurement Capability 777
9.9.2.4 Measurement Reporting Requirements 777
9.9.2.4.1 Void 777
9.9.2.4.2 Void 777
9.9.2.4.3 Void 777
9.9.2.5 Measurements Period Requirements 777
9.9.2.6 Void 780
9.9.2.7 Measurements Period Requirements without Measurement Gaps 780
9.9.2.8 Void 783
9.9.2.9 Measurements Period Requirements with both MG and PPW 783
9.9.3 PRS-RSRP measurements 784
9.9.3.1 Introduction 784
9.9.3.2 Requirements applicability 784
9.9.3.3 Measurement Capability 784
9.9.3.4 Measurement Reporting Requirements 784
9.9.3.5 Measurement Period Requirements 784
9.9.3.6 Measurement Period Requirements without Measurement Gaps 787
9.9.3.7 Void 789
9.9.3.8 Measurements Period Requirements with both MG and PPW 789
9.9.4 UE Rx-Tx time difference measurements 790
9.9.4.1 Introduction 790
9.9.4.2 Requirements Applicability 790
9.9.4.3 Measurement Capability 790
9.9.4.4 Measurement Reporting Requirements 790
9.9.4.5 Measurement Period Requirements 790
9.9.4.6 Measurement Period Requirements without Measurement Gaps 794
9.9.4.7 Void 797
9.9.4.8 Measurements Period Requirements with both MG and PPW 797
9.9.5 E-CID measurements 798
9.9.5.1 Introduction 798
9.9.5.2 Measurement Requirements 798
9.9.5.2.1 Intra-frequency Measurement Requirements 798
9.9.5.2.2 Inter-frequency Measurement Requirements 798
9.9.5.2.3 Measurement Reporting Delay 799
9.9.6 PRS-RSRPP measurements 799
9.9.6.1 Introduction 799

9.9.6.2 Requirements applicability....799
9.9.6.3 Measurement capability....799
9.9.6.4 Measurement reporting requirements....799
9.9.6.5 Measurement period requirements....800
9.9.6.6 Measurement Period Requirements without Measurement Gaps....800
9.9.6.7 Void....800
9.9.6.8 Measurements Period Requirements with both MG and PPW....800
9.10 CSI-RS based L3 measurements....800
9.10.1 Introduction....800
9.10.2 CSI-RS based intra-frequency measurements....800
9.10.2.1 Introduction....800
9.10.2.2 Requirements applicability....801
9.10.2.3 Number of cells and number of CSI-RS....802
9.10.2.3.1 Requirements for FR1....802
9.10.2.3.2 Requirements for FR2....802
9.10.2.4 Measurement Reporting Requirements....802
9.10.2.4.1 Periodic Reporting....803
9.10.2.4.2 Event-triggered Periodic Reporting....803
9.10.2.4.3 Event Triggered Reporting....803
9.10.2.5 Intra-frequency measurements without measurement gaps....803
9.10.2.6 Scheduling availability of UE during CSI-RS based intra-frequency measurements....805
9.10.2.6.1 Scheduling availability of UE performing CSI-RS based measurements in TDD bands....805
9.10.2.6.2 Scheduling availability of UE performing CSI-RS based measurements in FR2....805
9.10.3 CSI-RS based Inter-frequency measurements....805
9.10.3.1 Introduction....805
9.10.3.2 Requirements applicability....806
9.10.3.3 Number of cells and number of CSI-RS resources....806
9.10.3.3.1 Requirements for FR1....806
9.10.3.3.2 Requirements for FR2....806
9.10.3.4 Measurements reporting requirements....807
9.10.3.4.1 Periodic Reporting....807
9.10.3.4.2 Event-triggered Periodic Reporting....807
9.10.3.4.3 Event-triggered Reporting....807
9.10.3.5 Inter frequency measurements with measurement gaps....807
9.11 NR measurements with autonomous gaps....809
9.11.1 Introduction....809
9.11.2 CGI identification of an NR cell with autonomous gaps....809
9.11.3 CGI reporting delay....810
9.11A NR measurements with autonomous gaps for RedCap....810
9.11A.1 Introduction....810
9.11A.2 CGI identification of an NR cell with autonomous gaps....810
9.11A.3 CGI reporting delay....811
9.11A.4 CGI reporting scheduling restriction....811
9.12 Measurement for Propagation Delay Compensation....812
9.12.1 Introduction....812
9.12.2 Requirements Applicability....812
9.12.3 Measurement Capability....812
9.12.4 Measurement period requirements....813
9.12.4.1 PRS Measurement Period....813
9.12.4.2 TRS Measurement Period....814
9.12.5 Measurement Reporting Requirements....814
9.12.6 Scheduling availability during measurement for Propagation Delay Compensation....815
9.12.7 Measurement restriction for measurement for Propagation Delay Compensation....815
9.13 L1-RSRP measurements for a cell with different PCI from serving cell....815
9.13.1 Introduction....815
9.13.2 Requirements Applicability....815
9.13.3 Measurement Reporting Requirements....816
9.13.3.1 Periodic Reporting....816
9.13.3.2 Semi-Persistent Reporting....816
9.13.3.3 Aperiodic Reporting....817
9.13.4 L1-RSRP measurement requirements....817
9.13.4.1 Inter-cell SSB based L1-RSRP Reporting....817

9.13.5 Measurement restriction for L1-RSRP measurement 819
9.13.5.1 Measurement restriction for SSB based L1-RSRP....819
9.13.6 Scheduling availability of UE during L1-RSRP measurement....819
9.13.6.1 Scheduling availability of UE performing L1-RSRP measurement with a same subcarrier spacing as PDSCH/PDCCH on FR1 820
9.13.6.2 Scheduling availability of UE performing L1-RSRP measurement with a different subcarrier spacing than PDSCH/PDCCH on FR1....820
9.13.6.3 Scheduling availability of UE performing L1-RSRP measurement on FR2 820
9.13.6.4 Scheduling availability of UE performing L1-RSRP measurement on FR1 or FR2 in case of FR1-FR2 inter-band CA....820
9.13.6.5 Scheduling availability of UE performing L1-RSRP measurement in TDD bands on FR1....821

10 Measurement Performance requirements....822
10.1 NR measurements....822
10.1.1 Introduction....822
10.1.2 Intra-frequency RSRP accuracy requirements for FR1....822
10.1.2.1 Intra-frequency SS-RSRP accuracy requirements....822
10.1.2.1.1 Absolute SS-RSRP Accuracy....822
10.1.2.1.2 Relative SS-RSRP Accuracy....823
10.1.2.2 Void....824
10.1.2.3 Intra-frequency CSI-RSRP accuracy requirements....824
10.1.2.3.1 Absolute CSI-RSRP Accuracy....824
10.1.2.3.2 Relative CSI-RSRP Accuracy....825
10.1.2B Intra-frequency RSRP accuracy requirements for FR1 for CA/DC Idle Mode Measurements....826
10.1.2B.1 Intra-frequency SS-RSRP accuracy requirements....826
10.1.2B.1.1 Absolute SS-RSRP Accuracy....826
10.1.2C Intra-frequency RSRP accuracy requirements for FR1 SAN....827
10.1.2C.1 Intra-frequency SS-RSRP accuracy requirements....827
10.1.2C.1.1 Absolute SS-RSRP Accuracy....827
10.1.2C.1.2 Relative SS-RSRP Accuracy....827
10.1.3 Intra-frequency RSRP accuracy requirements for FR2....828
10.1.3.1 Intra-frequency SS-RSRP accuracy requirements....828
10.1.3.1.1 Absolute SS-RSRP Accuracy....828
10.1.3.1.2 Relative SS-RSRP Accuracy....828
10.1.3.2 Void....829
10.1.3.3 Intra-frequency CSI-RSRP accuracy requirements....829
10.1.3.3.1 Absolute CSI-RSRP Accuracy....829
10.1.3.3.2 Relative CSI-RSRP Accuracy....830
10.1.3B Intra-frequency RSRP accuracy requirements for FR2 for CA/DC Idle Mode Measurements....831
10.1.3B.1 Intra-frequency SS-RSRP accuracy requirements....831
10.1.3B.1.1 Absolute SS-RSRP Accuracy....831
10.1.4 Inter-frequency RSRP accuracy requirements for FR1....832
10.1.4.1 Inter-frequency SS-RSRP accuracy requirements....832
10.1.4.1.1 Absolute Accuracy of SS-RSRP in FR1....832
10.1.4.1.2 Relative Accuracy of SS-RSRP in FR1....832
10.1.4.2 Void....833
10.1.4.3 Inter-frequency CSI-RSRP accuracy requirements....833
10.1.4.3.1 Absolute Accuracy of CSI-RSRP in FR1....833
10.1.4.3.2 Relative Accuracy of CS-RSRP in FR1....834
10.1.4B Inter-frequency RSRP accuracy requirements for FR1 for CA/DC Idle Mode Measurements....835
10.1.4B.1 Inter-frequency SS-RSRP accuracy requirements....835
10.1.4B.1.1 Absolute Accuracy of SS-RSRP in FR1....835
10.1.4C Inter-frequency RSRP accuracy requirements for FR1 SAN....836
10.1.4C.1 Inter-frequency SS-RSRP accuracy requirements....836
10.1.4C.1.1 Absolute Accuracy of SS-RSRP in FR1....836
10.1.4C.1.2 Relative Accuracy of SS-RSRP in FR1....837
10.1.5 Inter-frequency RSRP accuracy requirements for FR2....837
10.1.5.1 Inter-frequency SS-RSRP accuracy requirements....837
10.1.5.1.1 Absolute SS-RSRP Accuracy....837
10.1.5.1.2 Relative SS-RSRP Accuracy....838
10.1.5.2 Void....839
10.1.5.3 Inter-frequency CSI-RSRP accuracy requirements....839

10.1.5.3.1 Absolute CSI-RSRP Accuracy 839
10.1.5.3.2 Relative CSI-RSRP Accuracy 840
10.1.5B Inter-frequency RSRP accuracy requirements for FR2 for CA/DC Idle Mode Measurements 840
10.1.5B.1 Inter-frequency SS-RSRP accuracy requirements 840
10.1.5B.1.1 Absolute SS-RSRP Accuracy 841
10.1.6 RSRP Measurement Report Mapping 841
10.1.7 Intra-frequency RSRQ accuracy requirements for FR1 843
10.1.7.1 Intra-frequency SS-RSRQ accuracy requirements in FR1 843
10.1.7.1.1 Absolute SS-RSRQ Accuracy in FR1 843
10.1.7.2 Intra-frequency CSI-RSRQ accuracy requirements 844
10.1.7.2.1 Absolute CSI-RSRQ Accuracy 844
10.1.7B Intra-frequency RSRQ accuracy requirements for FR1 for CA/DC Idle Mode Measurements 845
10.1.7B.1 Intra-frequency SS-RSRQ accuracy requirements in FR1 845
10.1.7B.1.1 Absolute SS-RSRQ Accuracy in FR1 845
10.1.7C Intra-frequency RSRQ accuracy requirements for FR1 SAN 846
10.1.7C.1 Intra-frequency SS-RSRQ accuracy requirements in FR1 846
10.1.7C.1.1 Absolute SS-RSRQ Accuracy in FR1 846
10.1.8 Intra-frequency RSRQ accuracy requirements for FR2 846
10.1.8.1 Intra-frequency SS-RSRQ accuracy requirements in FR2 846
10.1.8.1.1 Absolute SS-RSRQ Accuracy in FR2 846
10.1.8.2 Intra-frequency CSI-RSRQ accuracy requirements 847
10.1.8.2.1 Absolute CSI-RSRQ Accuracy 847
10.1.8B Intra-frequency RSRQ accuracy requirements for FR2 for CA/DC Idle Mode Measurements 848
10.1.8B.1 Intra-frequency SS-RSRQ accuracy requirements in FR2 848
10.1.8B.1.1 Absolute SS-RSRQ Accuracy in FR2 848
10.1.9 Inter-frequency RSRQ accuracy requirements for FR1 848
10.1.9.1 Inter-frequency SS-RSRQ accuracy requirements in FR1 848
10.1.9.1.1 Absolute Accuracy of SS-RSRQ in FR1 848
10.1.9.1.2 Relative Accuracy of SS-RSRQ in FR1 849
10.1.9.2 Inter-frequency CSI-RSRQ accuracy requirements 850
10.1.9.2.1 Absolute CSI-RSRQ Accuracy 850
10.1.9.2.2 Relative CSI-RSRQ Accuracy 851
10.1.9B Inter-frequency RSRQ accuracy requirements for FR1 for CA/DC Idle Mode Measurements 852
10.1.9B.1 Inter-frequency SS-RSRQ accuracy requirements in FR1 852
10.1.9B.1.1 Absolute Accuracy of SS-RSRQ in FR1 852
10.1.9C Inter-frequency RSRQ accuracy requirements for FR1 SAN 853
10.1.9C.1 Inter-frequency SS-RSRQ accuracy requirements in FR1 853
10.1.9C.1.1 Absolute Accuracy of SS-RSRQ in FR1 853
10.1.9C.1.2 Relative Accuracy of SS-RSRQ in FR1 853
10.1.10 Inter-frequency RSRQ accuracy requirements for FR2 854
10.1.10.1 Inter-frequency SS-RSRQ accuracy requirements in FR2 854
10.1.10.1.1 Absolute Accuracy of SS-RSRQ in FR2 854
10.1.10.1.2 Relative Accuracy of SS-RSRQ in FR2 854
10.1.10.2 Inter-frequency CSI-RSRQ accuracy requirements 855
10.1.10.2.1 Absolute CSI-RSRQ Accuracy 855
10.1.10.2.2 Relative CSI-RSRQ Accuracy 856
10.1.10B Inter-frequency RSRQ accuracy requirements for FR2 for CA/DC Idle Mode Measurements 857
10.1.10B.1 Inter-frequency SS-RSRQ accuracy requirements in FR2 857
10.1.10B.1.1 Absolute Accuracy of SS-RSRQ in FR2 857
10.1.11 RSRQ report mapping 857
10.1.12 Intra-frequency SINR accuracy requirements for FR1 858
10.1.12.1 Intra-frequency SS-SINR accuracy requirements in FR1 858
10.1.12.1.1 Absolute SS-SINR Accuracy in FR1 858
10.1.12.2 Intra-frequency CSI-SINR accuracy requirements in FR1 859
10.1.12.2.1 Absolute CSI-SINR Accuracy in FR1 859
10.1.12C Intra-frequency SINR accuracy requirements for FR1 SAN 860
10.1.12C.1 Intra-frequency SS-SINR accuracy requirements in FR1 860
10.1.12C.1.1 Absolute SS-SINR Accuracy in FR1 860
10.1.13 Intra-frequency SINR accuracy requirements for FR2 860
10.1.13.1 Intra-frequency SS-SINR accuracy requirements in FR2 860
10.1.13.1.1 Absolute SS-SINR Accuracy in FR2 860
10.1.13.2 Intra-frequency CSI-SINR accuracy requirements in FR2 861

10.1.13.2.1 Absolute CSI-SINR Accuracy in FR2 861
10.1.14 Inter-frequency SINR accuracy requirements for FR1 862
10.1.14.1 Inter-frequency SS-SINR accuracy requirements in FR1 862
10.1.14.1.1 Aboslute Accuracy of SS-SINR in FR1 862
10.1.14.1.2 Relative Accuracy of SS-SINR in FR1 862
10.1.14.2 Inter-frequency CSI-SINR accuracy requirements in FR1 863
10.1.14.2.1 Aboslute Accuracy of CSI-SINR in FR1 863
10.1.14.2.2 Relative Accuracy of CSI-SINR in FR1 864
10.1.14C Inter-frequency SINR accuracy requirements for FR1 SAN 865
10.1.14C.1 Inter-frequency SS-SINR accuracy requirements in FR1 865
10.1.14C.1.1 Aboslute Accuracy of SS-SINR in FR1 865
10.1.14C.1.2 Relative Accuracy of SS-SINR in FR1 865
10.1.15 Inter-frequency SINR accuracy requirements for FR2 866
10.1.15.1 Inter-frequency SS-SINR accuracy requirements in FR2 866
10.1.15.1.1 Aboslute Accuracy of SS-SINR in FR2 866
10.1.15.1.2 Relative Accuracy of SS-SINR in FR2 867
10.1.15.2 Inter-frequency CSI-SINR accuracy requirements in FR2 867
10.1.15.2.1 Aboslute Accuracy of CSI-SINR in FR2 867
10.1.15.2.2 Relative Accuracy of CSI-SINR in FR2 868
10.1.16 SINR report mapping 869
10.1.16.1 SS-SINR and CSI-SINR measurement report mapping 869
10.1.17 Power Headroom 870
10.1.17.1 Power Headroom Report 870
10.1.17.1.1 Power Headroom Report Mapping 870
10.1.18 $P_{CMAX,c,f}$ 870
10.1.18.1 Report Mapping 870
10.1.19 L1-RSRP accuracy requirements for FR1 871
10.1.19.1 SSB based L1-RSRP accuracy requirements 871
10.1.19.1.1 Absolute Accuracy 871
10.1.19.1.2 Relative Accuracy 872
10.1.19.2 CSI-RS based L1-RSRP accuracy requirements 872
10.1.19.2.1 Absolute Accuracy 872
10.1.19.2.2 Relative Accuracy 873
10.1.19C L1-RSRP accuracy requirements for FR1 SAN 874
10.1.19C.1 SSB based L1-RSRP accuracy requirements 874
10.1.19C.1.1 Absolute Accuracy 874
10.1.19C.1.2 Relative Accuracy 875
10.1.20 L1-RSRP accuracy requirements for FR2 875
10.1.20.1 SSB based L1-RSRP accuracy requirements 875
10.1.20.1.1 Absolute Accuracy 875
10.1.20.1.2 Relative Accuracy 876
10.1.20.2 CSI-RS based L1-RSRP accuracy requirements 876
10.1.20.2.1 Absolute Accuracy 876
10.1.20.2.2 Relative Accuracy 877
10.1.21 SFTD accuracy requirements 878
10.1.21.1 SFTD acuracy requirements for NE-DC 878
10.1.21.2 SFTD acuracy requirements for NR-DC 879
10.1.21.3 Inter frequency SFTD acuracy requirements 880
10.1.22 CLI measurement accuracy requirements 882
10.1.22.1 SRS-RSRP 882
10.1.22.1.1 SRS-RSRP Accuracy 882
10.1.22.1.2 SRS-RSRP report mapping 883
10.1.22.2 CLI-RSSI 884
10.1.22.2.1 CLI-RSSI Accuracy 884
10.1.22.2.2 CLI-RSSI report mapping 885
10.1.23 RSTD Measurements 885
10.1.23.1 Introduction 885
10.1.23.2 Measurement Accuracy Requirements 885
10.1.23.3 Report mapping 891
10.1.23.3.1 Absolute DL RSTD Measurement Reporting 891
10.1.23.3.2 Differential Reporting for DL RSTD Measurement 893
10.1.23.3.3 Additional Path Report Mapping for DL RSTD 894

10.1.24 PRS-RSRP Measurements 896
10.1.24.1 Introduction 896
10.1.24.2 Measurement Accuracy Requirements 896
10.1.24.2.1 Absolute PRS RSRP accuracy 896
10.1.24.2.2 Relative PRS RSRP accuracy 900
10.1.24.3 Report mapping 903
10.1.24.3.1 Absolute PRS-RSRP Measurement Report Mapping 903
10.1.24.3.2 Differential Report Mapping for PRS-RSRP Measurement 904
10.1.25 UE Rx-Tx Time Difference Measurements 905
10.1.25.1 Introduction 905
10.1.25.2 Measurement Accuracy Requirements 905
10.1.25.3 Report mapping 913
10.1.25.3.1 Absolute UE Rx-Tx Measurement Report Mapping 914
10.1.25.3.2 Differential UE Rx-Tx Measurement Report Mapping 915
10.1.25.3.3 Additional Path Report Mapping for UE Rx-Tx Time Difference 917
10.1.26 FR2 P-MPR report 919
10.1.26.1 Report mapping 919
10.1.27 L1-SINR accuracy requirements for FR1 919
10.1.27.1 L1-SINR accuracy requirements with CSI-RS based CMR and no dedicated IMR configured 919
10.1.27.1.1 Absolute Accuracy 919
10.1.27.1.2 Relative Accuracy 920
10.1.27.2 L1-SINR accuracy requirements with SSB based CMR and dedicated IMR configured 921
10.1.27.2.1 Absolute Accuracy 921
10.1.27.2.2 Relative Accuracy 922
10.1.27.3 L1-SINR accuracy requirements with CSI-RS based CMR and dedicated IMR configured 924
10.1.27.3.1 Absolute Accuracy 924
10.1.27.3.2 Relative Accuracy 925
10.1.28 L1-SINR accuracy requirements for FR2 927
10.1.29 Intra-frequency RSRQ accuracy requirements under CCA 933
10.1.29.1 Intra-frequency SS-RSRQ accuracy requirements in FR1 933
10.1.29.1.1 Absolute SS-RSRQ Accuracy 933
10.1.30 Inter-frequency RSRQ accuracy requirements under CCA 933
10.1.30.1 Inter-frequency SS-RSRQ accuracy requirements in FR1 933
10.1.30.1.1 Aboslute Accuracy of SS-RSRQ 933
10.1.30.1.2 Relative Accuracy of SS-RSRQ 934
10.1.31 Intra-frequency SINR accuracy requirements under CCA 935
10.1.31.1 Intra-frequency SS-SINR accuracy requirements in FR1 935
10.1.31.1.1 Absolute SS-SINR Accuracy 935
10.1.32 Inter-frequency SINR accuracy requirements under CCA 935
10.1.32.1 Inter-frequency SS-SINR accuracy requirements in FR1 935
10.1.32.1.1 Aboslute Accuracy of SS-SINR 935
10.1.32.1.2 Relative Accuracy of SS-SINR 936
10.1.33 L1-RSRP accuracy requirements under CCA 936
10.1.33.1 SSB based L1-RSRP accuracy requirements in FR1 936
10.1.33.1.1 Absolute Accuracy 936
10.1.33.1.2 Relative Accuracy 937
10.1.34 RSSI measurements under CCA 937
10.1.34.1 Intra-frequency absolute RSSI measurement accuracy requirements in FR1 937
10.1.34.2 Inter-frequency absolute RSSI measurement accuracy requirements in FR1 938
10.1.34.3 RSSI measurement report mapping 938
10.1.35 Channel occupancy measurements under CCA 938
10.1.35.1 Intra-frequency channel occupancy measurement accuracy requirements in FR1 938
10.1.35.2 Inter-frequency channel occupancy measurement accuracy requirements in FR1 939
10.1.36 Intra-frequency RSRP accuracy requirements under CCA 939
10.1.36.1 Intra-frequency SS-RSRP accuracy requirements in FR1 939
10.1.36.1.1 Absolute SS-RSRP Accuracy 939
10.1.36.1.2 Relative SS-RSRP Accuracy 940
10.1.37 Inter-frequency RSRP accuracy requirements under CCA 940
10.1.37.1 Inter-frequency SS-RSRP accuracy requirements in FR1 940
10.1.37.1.1 Absolute Accuracy of SS-RSRP 940
10.1.37.1.2 Relative Accuracy of SS-RSRP 941
10.1.38 PRS-RSRPP Measurements 941

10.1.38.1 Introduction 941
10.1.38.2 Measurement Accuracy Requirements 942
10.1.38.2.1 Absolute PRS RSRPP accuracy 942
10.1.38.3 Report mapping 945
10.1.38.3.1 Absolute PRS-RSRPP Measurement Report Mapping 945
10.1.38.3.2 Differential Report Mapping for PRS-RSRPP Measurement 946
10.1.39 UE Rx-Tx time difference measurements for RTT-based PDC 947
10.1.39.1 *Introduction* 947
10.1.39.2 *Measurement Accuracy Requirements for PRS* 947
10.1.39.3 Measurement Accuracy Requirements for TRS 950
10.1.40 Measurement Accuracy Requirements for Propagation Delay Compensation 952
10.1.40.1 Measurement Accuracy Requirements for PRS 952
10.1.40.2 Measurement Accuracy Requirements for TRS 954
10.1A NR measurements for RedCap 957
10.1A.1 Introduction 957
10.1A.2 Intra-frequency RSRP accuracy requirements for FR1 957
10.1A.2.1 Intra-frequency SS-RSRP accuracy requirements 957
10.1A.2.1.1 Absolute SS-RSRP Accuracy 957
10.1A.2.1.2 Relative SS-RSRP Accuracy 958
10.1A.3 Intra-frequency RSRP accuracy requirements for FR2 959
10.1A.3.1 Intra-frequency SS-RSRP accuracy requirements 959
10.1A.3.1.1 Absolute SS-RSRP Accuracy 959
10.1A.3.1.2 Relative SS-RSRP Accuracy 959
10.1A.4 Inter-frequency RSRP accuracy requirements for FR1 959
10.1A.4.1 Inter-frequency SS-RSRP accuracy requirements 959
10.1A.4.1.1 Absolute Accuracy of SS-RSRP in FR1 959
10.1A.4.1.2 Relative Accuracy of SS-RSRP in FR1 960
10.1A.5 Inter-frequency RSRP accuracy requirements for FR2 960
10.1A.5.1 Inter-frequency SS-RSRP accuracy requirements 960
10.1A.5.1.1 Absolute SS-RSRP Accuracy 960
10.1A.5.1.2 Relative SS-RSRP Accuracy 960
10.1A.6 Intra-frequency RSRQ accuracy requirements for FR1 961
10.1A.6.1 Intra-frequency SS-RSRQ accuracy requirements in FR1 961
10.1A.6.1.1 Absolute SS-RSRQ Accuracy in FR1 961
10.1A.7 Intra-frequency RSRQ accuracy requirements for FR2 961
10.1A.7.1 Intra-frequency SS-RSRQ accuracy requirements in FR2 961
10.1A.7.1.1 Absolute SS-RSRQ Accuracy in FR2 961
10.1A.8 Inter-frequency RSRQ accuracy requirements for FR1 962
10.1A.8.1 Inter-frequency SS-RSRQ accuracy requirements in FR1 962
10.1A.8.1.1 Absolute Accuracy of SS-RSRQ in FR1 962
10.1A.8.1.2 Relative Accuracy of SS-RSRQ in FR1 962
10.1A.9 Inter-frequency RSRQ accuracy requirements for FR2 963
10.1A.9.1 Inter-frequency SS-RSRQ accuracy requirements in FR2 963
10.1A.9.1.1 Absolute Accuracy of SS-RSRQ in FR2 963
10.1A.9.1.2 Relative Accuracy of SS-RSRQ in FR2 963
10.1A.10 Intra-frequency SINR accuracy requirements for FR1 963
10.1A.10.1 Intra-frequency SS-SINR accuracy requirements in FR1 963
10.1A.10.1.1 Absolute SS-SINR Accuracy in FR1 963
10.1A.11 Intra-frequency SINR accuracy requirements for FR2 964
10.1A.11.1 Intra-frequency SS-SINR accuracy requirements in FR2 964
10.1A.11.1.1 Absolute SS-SINR Accuracy in FR2 964
10.1A.12 Inter-frequency SINR accuracy requirements for FR1 964
10.1A.12.1 Inter-frequency SS-SINR accuracy requirements in FR1 964
10.1A.12.1.1 Aboslute Accuracy of SS-SINR in FR1 964
10.1A.12.1.2 Relative Accuracy of SS-SINR in FR1 965
10.1A.13 Inter-frequency SINR accuracy requirements for FR2 966
10.1A.13.1 Inter-frequency SS-SINR accuracy requirements in FR2 966
10.1A.13.1.1 Aboslute Accuracy of SS-SINR in FR2 966
10.1A.13.1.2 Relative Accuracy of SS-SINR in FR2 966
10.1A.14 L1-RSRP accuracy requirements for FR1 966
10.1A.14.1 SSB based L1-RSRP accuracy requirements 966
10.1A.14.1.1 Absolute Accuracy 966

10.1A.14.1.2 Relative Accuracy 967
10.1A.14.2 CSI-RS based L1-RSRP accuracy requirements 967
10.1A.14.2.1 Absolute Accuracy 967
10.1A.14.2.2 Relative Accuracy 968
10.1A.15 L1-RSRP accuracy requirements for FR2 969
10.1A.15.1 SSB based L1-RSRP accuracy requirements 969
10.1A.15.1.1 Absolute Accuracy 969
10.1A.15.1.2 Relative Accuracy 969
10.1A.15.2 CSI-RS based L1-RSRP accuracy requirements 969
10.1A.15.2.1 Absolute Accuracy 969
10.1A.15.2.2 Relative Accuracy 969
10.2 E-UTRAN measurements 969
10.2.1 Introduction 969
10.2.2 E-UTRAN RSRP measurements 970
10.2.3 E-UTRAN RSRQ measurements 970
10.2.4 E-UTRAN RSTD measurements 970
10.2.5 E-UTRAN RS-SINR measurements 970
10.2.6 E-UTRAN RSRP measurements for CA/DC Idle Mode Measurements 971
10.2.7 E-UTRAN RSRQ measurements for CA/DC Idle Mode Measurements 971
10.3 UTRAN FDD Measurements 971
10.3.1 UTRAN FDD CPICH RSCP 972
10.3.2 UTRAN FDD CPICH Ec/No 972
10.4 V2X measurements 973
10.4.1 Introduction 973
10.4.2 Intra-frequency PSBCH-RSRP accuracy requirements for FR1 973
10.4.2.1 PSBCH-RSRP Absolute Accuracy 973
10.4.2.2 PSBCH-RSRP Relative Accuracy 973
10.4.3 Intra-Frequency SL-RSSI Measurement Accuracy Requirements for FR1 974
10.4.3.1 Absolute SL-RSSI Accuracy 974
10.4.4 Intra-Frequency L1 SL-RSRP Measurement Accuracy Requirements for FR1 974
10.4.4.1 Absolute L1 SL-RSRP Accuracy 974
10.4.5 Intra-Frequency Discovery Signal Measurement Accuracy Requirements 975
10.4.5.1 Absolute Discovery Signal Measurement Accuracy 975

11 Void 976

12 V2X Requirements 977
12.1 Introduction 977
12.2 UE Transmit Timing 977
12.2.1 Introduction 977
12.2.2 GNSS as synchronization reference source 977
12.2.3 NR Cell as synchronization reference source 978
12.2.4 E-URTAN Cell as synchronization reference source 978
12.2.5 SyncRef UE as synchronization reference source 978
12.3 Initiation/Cease of SLSS Transmissions 979
12.3.1 Introduction 979
12.3.1.1 Initiation/Cease of SLSS transmissions with NR cell as synchronization reference source 979
12.3.1.2 Initiation/Cease of SLSS transmissions with EUTRAN cell as synchronization reference source 980
12.3.1.3 Initiation/Cease of SLSS transmissions with GNSS as synchronization reference source 981
12.3.1.4 Initiation/Cease of SLSS transmissions with SyncRef UE as synchronization reference source 981
12.4 Selection / Reselection of V2X Synchronization Reference Source 982
12.5 L1 SL-RSRP measurements 983
12.5.1 Introduction 983
12.5.2 SL-RSRP measurements 983
12.6 Congestion Control measurements 984
12.7 Interruption 984
12.7.1 Interruptions to WAN due to V2X Sidelink Communication 984
12.7.2 V2X Sidelink Communication Dropping due to synchronization source change 984
12.7.3 Interruptions to WAN due to switching between E-UTRA V2X Sidelink and NR V2X Sidelink 986
12.7.4 Interruptions to WAN at transitions between active and non-active during SL-DRX 987
12.7.5 Interruptions to V2X sidelink at transitions between active and non-active during DRX 987
12.7.6 Interruptions to V2X sidelink due to Active BWP switching Requirement 987

12.7.7 Interruptions to WAN due to SyncRef UE detection and/or Sensing during SL DRX off duration 988
12.7.8 Interruptions at NR sidelink discovery configuration 988
12.8 Reliability of GNSS signal 988
12.9 Scheduling availability 989
12.9.1 Scheduling availability of UE switching between E-UTRA sidelink and NR sidelink 989
12.9.2 Scheduling availability of UE switching between Uu uplink and V2X sidelink 989
12.10 Selection / Reselection of relay UE 989
12.10.1 Introduction 989
12.10.2 Selection / Reselection of relay UE 990

13 Measurement Performance Requirements for NR gNB 990
13.1 UL-RTOA 990
13.1.1 Report mapping 990
13.1.1A Additional Path Report Mapping for UL-RTOA 992
13.2 gNB Rx-Tx time difference 994
13.2.1 Report mapping 994
13.2.1A Additional Path Report Mapping for gNB Rx-Tx 996
13.2.2 Measurement Accuracy Requirements 998
13.2.2.1 Introduction 998
13.3 UL SRS RSRP measurement 999
13.3.1 Report mapping 999
13.3.2 Measurement accuracy requirements 999
13.3.2.1 Introduction 999
13.3.2.2 Requirements 1000
13.4 AoA/ZoA 1000
13.4.1 Report mapping 1000
13.5 Timing advance (T_{ADV}) 1001
13.5.1 Report mapping 1001
13.6 UL SRS RSRPP measurement 1002
13.6.1 Report mapping 1002
13.7 gNB Rx-Tx time difference measurements for RTT-based PDC 1003
13.7.1 Report mapping 1003
13.7.2 Measurement Accuracy Requirements 1003
13.7.2.1 Introduction 1003
13.7.2.2 Requirements 1003

Annex A (normative): Test Cases 1005

A.1 Purpose of annex 1005

A.2 Requirement classification for statistical testing 1005
A.2.1 Types of requirements in TS 38.133 1005
A.2.1.1 Time and delay requirements on UE higher layer actions 1005
A.2.1.2 Measurements of power levels, relative powers and time 1005
A.2.1.3 Implementation requirements 1006
A.2.1.4 Physical layer timing requirements 1006
A.2.1.5 Requirements under CCA 1006

A.3 RRM test configurations 1006
A.3.1 Reference measurement channels 1006
A.3.1.1 PDSCH 1006
A.3.1.1.1 FDD 1006
A.3.1.1.2 TDD 1007
A.3.1.2 CORESET for RMSI scheduling 1010
A.3.1.2.1 FDD 1010
A.3.1.2.2 TDD 1011
A.3.1.3 CORESET for RMC scheduling 1013
A.3.1.3.1 FDD 1013
A.3.1.3.2 TDD 1014
A.3.1.4 TDD UL/DL configuration 1016
A.3.1A Reference measurement channels under CCA 1017
A.3.1A.1 PDSCH 1017
A.3.1A.1.1 TDD 1017

A.3.1A.2 CORESET for RMSI scheduling 1018
A.3.1A.2.1 TDD 1018
A.3.1A.3 CORESET for RMC scheduling 1019
A.3.1A.3.1 TDD 1019
A.3.1A.4 TDD UL/DL configuration 1019
A.3.1A.5 RMC burst transmission model 1020
A.3.2.1 Generic OFDMA Channel Noise Generator (OCNG) 1020
A.3.2.1.1 OCNG pattern 1: Generic OCNG pattern for all unused REs 1020
A.3.2.1.2 OCNG pattern 2: Generic OCNG pattern for all unused REs for 2AoA setup 1021
A.3.2.1.3 OCNG pattern 3: Generic OCNG pattern for unused REs in the same bandwidth as CORESET 1021
A.3.2.1.4 OCNG pattern 4: Generic OCNG pattern for all unused REs outside SSB slot(s) 1022
A.3.2.2 Void 1023
A.3.3 Reference DRX configurations 1023
A.3.3.1 DRX Configuration 1: DRX cycle = 40 ms and TAT = 500 ms 1023
A.3.3.2 DRX Configuration 2: DRX cycle = 640 ms and TAT = 500 ms 1023
A.3.3.3 DRX Configuration 3: DRX cycle = 40 ms and TAT = Infinity 1023
A.3.3.4 DRX Configuration 4: DRX cycle = 160 ms and TAT = Infinity 1024
A.3.3.5 DRX Configuration 5: DRX cycle = 320 ms and TAT = Infinity 1024
A.3.3.6 DRX Configuration 6: DRX cycle = 320 ms and TAT = 500 ms 1024
A.3.3.7 DRX Configuration 7: DRX cycle = 640 ms and TAT = Infinity 1024
A.3.3.8 DRX Configuration 8: DRX cycle = 320 ms and TAT = Infinity 1025
A.3.3.9 DRX Configuration 9: DRX cycle = 40 ms and TAT = 500 ms 1025
A.3.3.10 DRX Configuration 10: DRX cycle = 640 ms and TAT = 500 ms 1025
A.3.3.11 DRX Configuration 11: DRX cycle = 20 ms and TAT = Infinity 1026
A.3.3.12 DRX Configuration 12: DRX cycle = 640 ms and TAT = Infinity 1026
A.3.3.13 DRX Configuration X1: DRX cycle = 80 ms and TAT = Infinity 1026
A.3.4 Test Cases with Different Channel Bandwidths 1027
A.3.4.1 Test Cases with Different E-UTRA Channel Bandwidths 1027
A.3.4.1.1 Introduction 1027
A.3.4.1.2 Principle of testing 1027
A.3.5 Test Cases for Synchronous and Asynchronous DC Operations 1027
A.3.5.1 EN-DC Test Cases for Synchronous and Asynchronous EN-DC Operations 1027
A.3.5.1.1 Introduction 1027
A.3.5.1.2 Principle of Testing 1027
A.3.6 Antenna configurations 1027
A.3.6.1 Antenna configurations for FR1 1027
A.3.6.1.1 Antenna connection for 4 Rx capable UEs 1027
A.3.6.1.1.1 Introduction 1027
A.3.6.1.1.2 Principle of testing 1028
A.3.6.2 Antenna configurations for FR2 1030
A.3.6A Antenna configurations with unlicensed bands 1030
A.3.6A.1 Antenna configurations for FR1 1030
A.3.6A.1.1 Antenna connection for 4 Rx capable UEs 1030
A.3.6A.1.1.1 Introduction 1030
A.3.6A.1.1.2 Principle of testing 1030
A.3.7 EN-DC test setup 1032
A.3.7.1 Introduction 1032
A.3.7.2 E-UTRAN Serving Cell Parameters 1032
A.3.7.2.1 E-UTRAN Serving Cell Parameters for Tests with NR Cell(s) in FR1 1032
A.3.7.2.2 E-UTRAN Serving Cell Parameters for Tests with NR Cell(s) in FR2 1033
A.3.7A NR FR1-FR2 test setup 1034
A.3.7B EN-DC test setup with unlicensed bands 1035
A.3.7B.1 Introduction 1035
A.3.7B.2 E-UTRAN Serving Cell Parameters 1035
A.3.7B.2.1 E-UTRAN Serving Cell Parameters for Tests with NR Cell(s) under CCA in FR1 1035
A.3.7C LTE-FR1/FR2 test setup 1036
A.3.7D NE-DC test setup 1036
A.3.7D.1 Introduction 1036
A.3.7D.2 E-UTRAN Serving Cell Parameters 1036
A.3.7D.2.1 E-UTRAN Serving Cell Parameters for Tests with NR Cell(s) in FR1 1036
A.3.7D.2.2 E-UTRAN Serving Cell Parameters for Tests with NR Cell(s) in FR2 1036
A.3.8 PRACH configurations 1037

A.3.8.1 Introduction....1037
A.3.8.2 PRACH configurations in FR1....1037
A.3.8.2.1 FR1 PRACH configuration 1....1037
A.3.8.2.2 FR1 PRACH configuration 2....1037
A.3.8.2.3 FR1 PRACH configuration 3....1038
A.3.8.2.4 FR1 PRACH configuration 4....1039
A.3.8.3 PRACH configurations in FR2....1039
A.3.8.3.1 FR2 PRACH configuration 1....1039
A.3.8.3.2 FR2 PRACH configuration 2....1040
A.3.8.3.3 FR2 PRACH configuration 3....1041
A.3.8.3.4 FR2 PRACH configuration 4....1041
A.3.8A PRACH configurations under CCA....1042
A.3.8A.1 Introduction....1042
A.3.8A.2 PRACH configurations in FR1....1042
A.3.8A.2.1 FR1 PRACH configuration 1 under CCA....1042
A.3.8A.2.2 FR1 PRACH configuration 2 under CCA....1043
A.3.9 BWP configurations....1044
A.3.9.1 Introduction....1044
A.3.9.2 Downlink BWP configurations....1044
A.3.9.2.1 Initial BWP....1044
A.3.9.2.2 Dedicated BWP....1044
A.3.9.3 Uplink BWP configurations....1045
A.3.9.3.1 Initial BWP....1045
A.3.9.3.2 Dedicated BWP....1045
A.3.9A BWP configurations for RedCap....1046
A.3.9A.1 Introduction....1046
A.3.9A.2 Downlink BWP configurations....1046
A.3.9A.2.1 Dedicated BWP....1046
A.3.9A.3 Uplink BWP configurations....1046
A.3.9A.3.2 Dedicated BWP....1046
A.3.10 SSB Configurations....1047
A.3.10.1 SSB Configurations for FR1....1047
A.3.10.1.1 SSB pattern 1 in FR1: SSB allocation for SSB SCS=15 kHz in 10 MHz....1047
A.3.10.1.5 SSB pattern 5 in FR1: SSB allocation for SSB SCS=15 kHz starting from odd SFN in 10 MHz....1048
A.3.10.1.6 SSB pattern 6 in FR1: SSB allocation for SSB SCS=30 kHz starting from odd SFN in 40 MHz....1049
A.3.10.1.7 SSB pattern 7 in FR1: SSB allocation for SSB SCS=15 kHz in 10 MHz....1049
A.3.10.1.8 SSB pattern 8 in FR1: SSB allocation for SSB SCS=30 kHz in 40 MHz....1049
A.3.10.2 SSB Configurations for FR2....1050
A.3.10.2.1 SSB pattern 1 in FR2: SSB allocation for SSB SCS=120 kHz in 100 MHz....1050
A.3.10.2.2 SSB pattern 2 in FR2: SSB allocation for SSB SCS=240 kHz in 100 MHz....1050
A.3.10.2.3 SSB pattern 3 in FR2: SSB allocation for SSB SCS=120 kHz in 100 MHz....1051
A.3.10.2.4 SSB pattern 4 in FR2: SSB allocation for SSB SCS=240 kHz in 100 MHz....1051
A.3.10.2.5 SSB pattern 5 in FR2: SSB allocation for SSB SCS=120 kHz in 100 MHz....1051
A.3.10.2.6 SSB pattern 6 in FR2: SSB allocation for SSB SCS=240 kHz in 100 MHz....1052
A.3.10.2.7 SSB pattern 7 in FR2: SSB allocation for SSB SCS=120 kHz in 100 MHz....1052
A.3.10.2.8 SSB pattern 8 in FR2: SSB allocation for SSB SCS=240 kHz in 100 MHz....1052
A.3.10.2.9 SSB pattern 9 in FR2: SSB allocation for SSB SCS=120 kHz in 100 MHz....1053
A.3.10.2.10 SSB pattern 10 in FR2: SSB allocation for SSB SCS=240 kHz in 100 MHz....1053
A.3.10A SSB Configurations under CCA....1057
A.3.10A.1 SSB Configurations under CCA for FR1....1057
A.3.10A.1.1 SSB pattern 1 under CCA for semi-static channel access: SSB allocation for SSB SCS=30kHz in 40MHz....1057
A.3.10A.1.2 SSB pattern 2 under CCA for dynamic channel access: SSB allocation for SSB SCS=30kHz in 40MHz....1057
A.3.10A.1.3 SSB pattern 3 under CCA for semi-static channel access: SSB allocation for SSB SCS=30 kHz in 40 MHz....1058
A.3.10A.1.4 SSB pattern 4 under CCA for dynamic channel access: SSB allocation for SSB SCS=30 kHz in 40 MHz....1058
A.3.10B SSB Configurations for RedCap....1059
A.3.10B.1 SSB Configurations for FR1....1059
A.3.10B.1.1 SSB pattern 1 for RedCap in FR1: SSB allocation for SSB SCS=30 kHz in 20 MHz....1059
A.3.10B.1.2 SSB pattern 2 for RedCap in FR1: SSB allocation for SSB SCS=30 kHz in 20 MHz....1059

A.3.10B.1.3 SSB pattern 3 for RedCap in FR1: SSB allocation for SSB SCS=30 kHz starting from odd SFN in 20 MHz 1060
A.3.10B.1.4 SSB pattern 4 for RedCap in FR1: SSB allocation for SSB SCS=15 kHz in 10 MHz 1060
A.3.10B.1.5 SSB pattern 5 for RedCap in FR1: SSB allocation for SSB SCS=30 kHz in 20 MHz 1060
A.3.10B.1.6 SSB pattern 6 for RedCap in FR1: SSB allocation for SSB SCS=15 kHz in 10 MHz 1061
A.3.10B.1.7 SSB pattern 7 for RedCap in FR1: SSB allocation for SSB SCS=30 kHz in 20 MHz 1061
A.3.10B.2 SSB Configurations for FR2 1062
A.3.10B.2.1 SSB pattern 1 for RedCap in FR2: SSB allocation for SSB SCS=120 kHz in 100 MHz 1062
A.3.10B.2.2 SSB pattern 2 for RedCap in FR2: SSB allocation for SSB SCS=120 kHz in 100 MHz 1062
A.3.10B.2.3 SSB pattern 3 for RedCap in FR2: SSB allocation for SSB SCS=120 kHz in 100 MHz 1063
A.3.10B.2.4 SSB pattern 4 for RedCap in FR2: SSB allocation for SSB SCS=240 kHz in 100 MHz 1063
A.3.10B.2.5 SSB pattern 5 for RedCap in FR2: SSB allocation for SSB SCS=240 kHz in 100 MHz 1063
A.3.11 SMTC Configurations 1064
A.3.11.1 SMTC pattern 1: SMTC period = 20 ms with SMTC duration = 1 ms 1064
A.3.11.2 SMTC pattern 2: SMTC period = 20 ms with SMTC duration = 5 ms 1064
A.3.11.3 SMTC pattern 3: SMTC period = 160 ms with SMTC duration = 1 ms 1064
A.3.11.4 SMTC pattern 4: SMTC period = 20 ms with SMTC duration = 1 ms 1064
A.3.11.5 SMTC pattern 5: SMTC period = 20 ms with SMTC duration = 5 ms 1065
A.3.11.6 SMTC pattern 6: SMTC period = 20 ms with SMTC duration = 5 ms 1065
A.3.11.7 SMTC pattern 7: SMTC period = 20 ms with SMTC duration = 5 ms 1065
A.3.11A SMTC Configurations for RedCap 1065
A.3.11A.1 SMTC pattern 1 for RedCap: SMTC period = 40 ms with SMTC duration = 1 ms 1065
A.3.11A.2 SMTC pattern 2 for RedCap: SMTC period = 80 ms with SMTC duration = 1 ms 1065
A.3.11A.3 SMTC pattern 3 for RedCap: SMTC period = 40 ms with SMTC duration = 1 ms 1066
A.3.11A.4 SMTC pattern 4 for RedCap: SMTC period = 80 ms with SMTC duration = 5 ms 1066
A.3.12 Test Cases with Different CC Configurations 1066
A.3.12.1 EN-DC Test Cases with Different EN-DC Configurations 1066
A.3.12.1.1 Introduction 1066
A.3.12.1.2 Principle of testing 1066
A.3.12.2 Carrier Aggregation Test Cases with Different CA Configurations 1066
A.3.12.2.1 Introduction 1066
A.3.12.2.2 Principle of testing 1067
A.3.13 Test Cases in SA and EN-DC Operations 1067
A.3.13.1 Introduction 1067
A.3.13.2 Principle of Testing 1067
A.3.13A Test Cases involving E-UTRA/FR1 and FR2 carriers 1067
A.3.13A.1 Introduction 1067
A.3.13A.2 Principle of Testing in EN-DC 1067
A.3.13A.3 Principle of Testing in SA 1068
A.3.13A.4 Principle of Testing in E-UTRA 1068
A.3.13B Test Cases for EN-DC and NE-DC Operations 1069
A.3.13B.1 Active BWP switch Test Cases for EN-DC and NE-DC Operations 1069
A.3.13B.1.1 Introduction 1069
A.3.13B.1.2 Principle of Testing 1069
A.3.13B.2 SFTD accuracy Test Cases for EN-DC and NE-DC Operations 1069
A.3.13B.2.1 Introduction 1069
A.3.13B.2.2 Principle of Testing 1069
A.3.14 CSI-RS configurations 1069
A.3.14.1 FDD 1069
A.3.14.2 TDD 1071
A.3.15 Angle of Arrival (AoA) for FR2 RRM test cases 1076
A.3.15.1 Setup 1: Single AoA in Rx beam peak direction 1076
A.3.15.2 Setup 2: Single AoA in non Rx beam peak direction 1076
A.3.15.2.1 Setup 2a: Single AoA in non Rx beam peak direction without change in direction 1076
A.3.15.2.2 Setup 2b: Single AoA in non Rx beam peak direction with change in direction 1077
A.3.15.3 Setup 3: 2 AoAs 1077
A.3.15.4 Setup 4: 2 AoAs, 1 AoA in Rx beam peak direction, 1 in non Rx beam peak 1077
A.3.15.4.1 Setup 4a: 2 AoAs, 1 AoA in Rx beam peak direction, 1 in non Rx beam peak without change in direction 1077
A.3.15.4.2 Setup 4b: 2 AoAs, 1 AoA in Rx beam peak direction, 1 in non Rx beam peak with change in direction 1077
A.3.16 TCI State Configuration 1078

A.3.16.1 Introduction....1078
A.3.16.2 TCI states....1078
A.3.16A Unified TCI State Configuration....1078
A.3.16A.1 Introduction....1078
A.3.16A.2 DLorJoint TCI states....1078
A.3.16A.3 UL TCI states....1079
A.3.17 Configurations of CSI-RS for tracking....1079
A.3.17.1 Configuration of CSI-RS for tracking for FR1....1079
A.3.17.1.1 FDD....1079
A.3.17.1.2 TDD....1081
A.3.17.2 Configuration of CSI-RS for tracking for FR2....1082
A.3.17.2.1 TDD....1082
A.3.18 Additional definitions related to OTA testing for FR2 RRM test cases....1084
A.3.18.1 Introduction....1084
A.3.18.2 PRACH Power Measurement....1084
A.3.19 Test applicability for DAPS handover....1084
A.3.19.1 Introduction....1084
A.3.19.2 Principle of testing....1084
A.3.20 MsgA configurations....1084
A.3.20.1 Introduction....1084
A.3.20.2 MsgA configurations in FR1....1085
A.3.20.2.1 FR1 MsgA configuration 1....1085
A.3.20.2.2 FR1 MsgA configuration 2....1086
A.3.20.3 MsgA configurations in FR2....1087
A.3.20.3.1 FR2 MsgA configuration 1....1087
A.3.20.3.2 FR2 MsgA configuration 2....1088
A.3.20A MsgA configurations under CCA....1089
A.3.20A.1 Introduction....1089
A.3.20A.2 MsgA configurations in FR1....1089
A.3.20A.2.1 FR1 MsgA configuration 1 under CCA....1089
A.3.20A.2.2 FR1 MsgA configuration 2 under CCA....1090
A.3.21 V2X sidelink communication....1091
A.3.21.1 Introduction....1091
A.3.21.2 Reference resource pool configurations for V2X Sidelink Communication....1091
A.3.21.3 Reference measurement channels for V2X Sidelink Communication....1094
A.3.21.4 Reference SL-DRX configurations....1095
A.3.21.4.1 SL-DRX Configuration 1: SL-DRX cycle = 40 ms....1095
A.3.21.4.2 SL-DRX Configuration 2: SL-DRX cycle = 320 ms....1095
A.3.21.4.3 SL-DRX Configuration 3: SL-DRX cycle = 640 ms....1095
A.3.22 CSI-IM configurations....1095
A.3.22.1 FDD....1095
A.3.22.2 TDD....1096
A.3.23 Spatial Relation Configuration....1097
A.3.23.1 Introduction....1097
A.3.23.2 Spatial Relation....1098
A.3.24 SRS configuration....1098
A.3.25 Channel bandwidth (CBW) configurations....1100
A.3.25.1 DL UE specific CBW....1100
A.3.25.2 UL UE specific CBW....1100
A.3.26 CCA model....1100
A.3.26.1 Introduction....1100
A.3.26.2 CCA model for operation on a carrier frequency with CCA in FR1....1101
A.3.26.2.1 DL CCA model....1101
A.3.26.2.2 UL CCA model....1102
A.3.26.3 CCA model for operation on a carrier frequency with CCA in FR2-2....1103
A.3.26.3.1 DL CCA model....1103
A.3.26.3.2 UL CCA model....1103
A.3.27 Test Cases with at Least One Cell on a Carrier Frequency with CCA....1104
A.3.27.1 Introduction....1104
A.3.27.2 NR Standalone Tests with NR SCell under CCA and All Other NR Cells in FR1....1104
A.3.27.3 EN-DC Tests with NR PSCell under CCA and Other NR Cells in FR1....1104
A.3.27.4 NR Standalone Tests with NR PCell under CCA and Other NR Cells in FR1....1104

A.3.27.5 E-UTRA Standalone Tests with at Least One NR Cell under CCA 1104
A.3.28 Discovery Burst Transmission Window configuration under CCA 1105
A.3.28.1 DBT Window pattern 1: DBT Window period = 20 ms with DBT Window duration = 1 ms 1105
A.3.29 Testing principles for UE capable of only NR bands with shared spectrum access 1105
A.3.29.1 Introduction....1105
A.3.29.2 Principle of testing for UE capable of EN-DC with only NR bands with shared spectrum access....1105
A.3.29.3 Principle of testing for UE capable of SA operation with only NR bands with shared spectrum access 1105
A.3.30 CSI-RS configurations for RRM 1106
A.3.30.1 FDD 1106
A.3.30.2 TDD 1106
A.3.31 PRS Configurations 1108
A.3.31.1. PRS Configurations for FR1 1108
A.3.31.1.1. PRS pattern 1 in FR1: SCS=15 KHz....1108
A.3.31.1.2. PRS pattern 2 in FR1: SCS=30 KHz....1108
A.3.31.2. PRS Configurations for FR2 1109
A.3.31.2.1. PRS pattern 1 in FR2: SCS=120 KHz....1109
A.3.32 NR sidelink discovery 1109
A.3.32.1 Introduction....1109
A.3.32.2 Reference resource pool configurations for NR Sidelink Discovery 1109
A.3.32.3 Principle of Testing....1110
A.3.33 PRS Processing Window (PPW) configurations 1110
A.3.34 Testing principles for test cases related to PRS measurements 1110
A.3.34.1 Introduction....1110
A.3.34.2 Test cases in RRC_INACTIVE state 1110
A.3.34.3 Test cases for PRS measurements with gaps in RRC_CONNECTED state 1111
A.3.34.4 Test cases for PRS measurements without gaps in RRC_CONNECTED state 1111
A.3.35 Testing principle for RedCap UE 1112
A.3.35.1 Introduction....1112
A.3.35.2 Principle of testing for FR1 1112
A.3.35.3 Principle of testing for FR2 1112
A.3.36 Testing related to Satellite access 1112
A.3.36.1 Introduction....1112
A.3.36.2 Principle of testing GSO and NGSO scenarios....1112
A.3.36.2 Principle of testing different RRM requirements....1112
A.3.36.3 Principle of testing different ephemeris formats 1113
A.3.36.4 General setup for SIB19 1115

A.4 EN-DC tests with all NR cells in FR1....1116
A.4.1 Void....1116
A.4.2 Void....1116
A.4.3 RRC_CONNECTED state mobility 1116
A.4.3.1 Void 1116
A.4.3.2 RRC Connection Mobility Control 1116
A.4.3.2.1 Void....1116
A.4.3.2.2 Random Access 1116
A.4.3.2.2.1 4-step RA type contention based random access test in FR1 for PSCell in EN-DC....1116
A.4.3.2.2.2 4-step RA type n on-contention based random access test in FR1 for PSCell in EN-DC 1119
A.4.3.2.2.3 2-step RA type contention based random access test in FR1 for PSCell in EN-DC....1122
A.4.3.2.2.4 2-step RA type n on-contention based random access test in FR1 for PSCell in EN-DC 1124
A.4.3.2.3 Void....1127
A.4.3.3 Handover with PSCell from EN-DC to EN-DC with known target PSCell in FR1....1127
A.4.3.3.1 Test Purpose and Environment 1127
A.4.3.3.2 Test Requirements....1131
A.4.4 Timing 1132
A.4.4.1 UE transmit timing 1132
A.4.4.1.1 NR UE Transmit Timing Test for FR1 1132
A.4.4.1.1.1 Test Purpose and environment 1132
A.4.4.1.1.2 Test requirements 1134
A.4.4.2 UE timer accuracy 1135
A.4.4.3 Timing advance 1135
A.4.4.3.1 EN-DC FR1 timing advance adjustment accuracy....1135

A.4.4.3.1.1 Test Purpose and Environment 1135
A.4.4.3.1.2 Test Parameters 1135
A.4.4.3.1.3 Test Requirements 1138
A.4.5 Signaling characteristics 1138
A.4.5.1 Radio link Monitoring 1138
A.4.5.1.1 Radio Link Monitoring Out-of-sync Test for FR1 PSCell configured with SSB-based RLM RS in non-DRX mode 1139
A.4.5.1.1.1 Test Purpose and Environment 1139
A.4.5.1.1.2 Test Requirements 1142
A.4.5.1.2 Radio Link Monitoring In-sync Test for FR1 PSCell configured with SSB-based RLM RS in non-DRX mode 1142
A.4.5.1.2.1 Test Purpose and Environment 1142
A.4.5.1.2.2 Test Requirements 1146
A.4.5.1.3 Radio Link Monitoring Out-of-sync Test for FR1 PSCell configured with SSB-based RLM RS in DRX mode 1146
A.4.5.1.3.1 Test Purpose and Environment 1146
A.4.5.1.3.2 Test Requirements 1149
A.4.5.1.4 Radio Link Monitoring In-sync Test for FR1 PSCell configured with SSB-based RLM RS in DRX mode 1150
A.4.5.1.4.1 Test Purpose and Environment 1150
A.4.5.1.4.2 Test Requirements 1153
A.4.5.1.5 EN-DC Radio Link Monitoring Out-of-sync Test for FR1 PSCell configured with CSI-RS-based RLM in non-DRX mode 1153
A.4.5.1.5.1 Test Purpose and Environment 1153
A.4.5.1.5.2 Test Requirements 1156
A.4.5.1.6 EN-DC Radio Link Monitoring In-sync Test for FR1 PSCell configured with CSI-RS-based RLM in non-DRX mode 1157
A.4.5.1.6.1 Test Purpose and Environment 1157
A.4.5.1.6.2 Test Requirements 1160
A.4.5.1.7 EN-DC Radio Link Monitoring Out-of-sync Test for FR1 PSCell configured with CSI-RS-based RLM in DRX mode 1160
A.4.5.1.7.1 Test Purpose and Environment 1160
A.4.5.1.7.2 Test Requirements 1163
A.4.5.1.8 EN-DC Radio Link Monitoring In-sync Test for FR1 PSCell configured with CSI-RS-based RLM in DRX mode 1164
A.4.5.1.8.1 Test Purpose and Environment 1164
A.4.5.1.8.2 Test Requirements 1167
A.4.5.1.9 Radio Link Monitoring Out-of-sync Test for FR1 PSCell configured with SSB-based RLM RS for UE fulfilling relaxed measurement criterion 1168
A.4.5.1.9.1 Test Purpose and Environment 1168
A.4.5.2 Interruption 1171
A.4.5.2.1 E-UTRAN – NR FR1 interruptions at transitions between active and non-active during DRX in synchronous EN-DC 1171
A.4.5.2.1.1 Test Purpose and Environment 1171
A.4.5.2.1.2 Test Requirements 1173
A.4.5.2.2 E-UTRAN – NR FR1 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC 1174
A.4.5.2.2.1 Test Purpose and Environment 1174
A.4.5.2.2.2 Test Requirements 1176
A.4.5.2.3 E-UTRAN – NR FR1 interruptions during measurements on deactivated NR SCC in synchronous EN-DC 1176
A.4.5.2.3.1 Test Purpose and Environment 1176
A.4.5.2.3.2 Test Requirements 1181
A.4.5.2.4 E-UTRAN – NR FR1 interruptions during measurements on deactivated NR SCC in asynchronous EN-DC 1182
A.4.5.2.4.1 Test Purpose and Environment 1182
A.4.5.2.4.2 Test Requirements 1186
A.4.5.2.5 E-UTRAN – NR FR1 interruptions during measurements on deactivated E-UTRAN SCC in synchronous EN-DC 1187
A.4.5.2.5.1 Test Purpose and Environment 1187
A.4.5.2.5.2 Test Requirements 1189

A.4.5.2.6 E-UTRAN – NR FR1 interruptions during measurements on deactivated E-UTRAN SCC in asynchronous EN-DC....1189
A.4.5.2.6.1 Test Purpose and Environment....1189
A.4.5.2.6.2 Test Requirements....1191
A.4.5.2.7 Void....1192
A.4.5.2.8 E-UTRAN - NR FR1 interruptions at NR SRS carrier based switching in asynchronous EN-DC....1192
A.4.5.2.8.1 Test Purpose and Environment....1192
A.4.5.2.8.2 Test Requirements....1194
A.4.5.2.9 E-UTRAN – NR interruptions at E-UTRA SRS carrier based switching....1195
A.4.5.2.9.1 Test Purpose and Environment....1195
A.4.5.2.9.2 Test Requirements....1197
A.4.5.2.10 E-UTRAN – NR FR1 interruptions due to RRM and RLM/BFD measurements on deactivated NR PSCell....1198
A.4.5.2.10.1 Test Purpose and Environment....1198
A.4.5.2.10.2 Test Requirements....1200
A.4.5.2.11 E-UTRAN - NR FR1 interruptions at NR SRS antenna port switching with 1 SRS symbol in a slot in synchronous EN-DC....1200
A.4.5.2.11.1 Test Purpose and Environment....1200
A.4.5.2.11.2 Test Requirements....1203
A.4.5.2.12 E-UTRAN - NR FR1 interruptions at NR SRS antenna port switching in asynchronous EN-DC....1204
A.4.5.2.12.1 Test Purpose and Environment....1204
A.4.5.3 SCell Activation and Deactivation Delay....1208
A.4.5.3.1 SCell Activation and deactivation of known SCell in FR1 for 160ms SCell measurement cycle....1208
A.4.5.3.1.1 Test Purpose and Environment....1208
A.4.5.3.1.2 Test Requirements....1214
A.4.5.3.2 SCell Activation and deactivation of known SCell in FR1 for 640ms SCell measurement cycle....1215
A.4.5.3.2.1 Test Purpose and Environment....1215
A.4.5.3.2.2 Test Requirements....1215
A.4.5.3.3 SCell Activation and deactivation of unknown SCell in FR1....1215
A.4.5.3.3.1 Test Purpose and Environment....1215
A.4.5.3.3.2 Test Requirements....1216
A.4.5.3.4 SCell Activation and deactivation of multiple unknown SCells in FR1 with single activation/deactivation command....1216
A.4.5.3.4.1 Test Purpose and Environment....1216
A.4.5.3.3.2 Test Requirements....1219
A.4.5.3.5 Direct SCell activation at SCell addition of known SCell in FR1....1219
A.4.5.3.5.1 Test Purpose and Environment....1219
A.4.5.3.5.2 Test Requirements....1224
A.4.5.3.3 Fast SCell Activation of known SCell in FR1 for 160ms SCell measurement cycle....1225
A.4.5.3.3.1 Test Purpose and Environment....1225
A.4.5.3.3.2 Test Requirements....1228
A.4.5.3.4 Fast SCell Activation of known SCell in FR1 for 640 ms SCell measurement cycle....1229
A.4.5.3.4.1 Test Purpose and Environment....1229
A.4.5.3.4.2 Test Requirements....1229
A.4.5.4 UE UL carrier RRC reconfiguration Delay....1229
A.4.5.4.1 UE UL carrier RRC reconfiguration Delay....1229
A.4.5.4.1.1 Test Purpose and Environment....1229
A.4.5.4.1.2 Test Requirements....1235
A.4.5.5 Beam Failure Detection and Link recovery procedures....1236
A.4.5.5.1 EN-DC Beam Failure Detection and Link Recovery Test for FR1 PSCell configured with SSB-based BFD and LR in non-DRX mode....1236
A.4.5.5.1.1 Test Purpose and Environment....1236
A.4.5.5.1.2 Test Requirements....1240
A.4.5.5.2 EN-DC Beam Failure Detection and Link Recovery Test for FR1 PSCell configured with SSB-based BFD and LR in DRX mode....1240
A.4.5.5.2.1 Test Purpose and Environment....1240
A.4.5.5.2.2 Test Requirements....1243
A.4.5.5.3 EN-DC Beam Failure Detection and Link Recovery Test for FR1 PSCell configured with CSI-RS-based BFD and LR in non-DRX mode....1244
A.4.5.5.3.1 Test Purpose and Environment....1244
A.4.5.5.3.2 Test Requirements....1247

A.4.5.5.4 EN-DC Beam Failure Detection and Link Recovery Test for FR1 PSCell configured with CSI-RS-based BFD and LR in DRX mode 1248
A.4.5.5.4.1 Test Purpose and Environment 1248
A.4.5.5.4.2 Test Requirements 1252
A.4.5.5.5 EN-DC Beam Failure Detection and Link Recovery Test for FR1 SCell configured with CSI-RS-based BFD and SSB-based LR in non-DRX mode 1252
A.4.5.5.5.1 Test Purpose and Environment 1252
A.4.5.5.5.2 Test Requirements 1256
A.4.5.5.6 EN-DC Beam Failure Detection and Link Recovery Test for FR1 SCell configured with CSI-RS-based BFD and SSB-based LR in DRX mode 1257
A.4.5.5.6.1 Test Purpose and Environment 1257
A.4.5.5.6.2 Test Requirements 1261
A.4.5.5.7 EN-DC TRP specific Beam Failure Detection and Link Recovery Test for FR1 PSCell configured with SSB-based BFD and LR in non-DRX mode 1262
A.4.5.5.7.1 Test Purpose and Environment 1262
A.4.5.5.7.2 Test Requirements 1266
A.4.5.5.8 EN-DC TRP specific Beam Failure Detection and Link Recovery Test for FR1 SCell configured with CSI-RS-based BFD and SSB-based LR in non-DRX mode 1266
A.4.5.5.8.1 Test Purpose and Environment 1266
A.4.5.5.8.2 Test Requirements 1271
A.4.5.6 Active BWP switch 1272
A.4.5.6.1 DCI-based and Timer-based Active BWP Switch 1272
A.4.5.6.1.1 E-UTRAN – NR PSCell FR1 DL active BWP switch in non-DRX in synchronous EN-DC 1272
A.4.5.6.1.2 E-UTRAN – NR PSCell FR1 DL active BWP switch with FR1 SCell in non-DRX in synchronous EN-DC 1275
A.4.5.6.2 RRC-based Active BWP Switch 1281
A.4.5.6.3 Simultaneous DCI-based and Timer-based Active BWP Switch on multiple CCs 1284
A.4.5.6.3.1 Simultaneous E-UTRAN – NR PSCell FR1 DL active BWP switch in non-DRX in EN-DC on multiple CCs 1284
A.4.5.6.3.1.1 Test Purpose and Environment 1284
A.4.5.6.3.1.2 Test Requirements 1289
A.4.5.6.4 Simultaneous RRC-based Active BWP Switch on multiple CCs 1290
A.4.5.6.4.1 E-UTRAN – NR PSCell FR1 DL active BWP switch in non-DRX in synchronous EN-DC on multiple CCs 1290
A.4.5.6.4.1.1 Test Purpose and Environment 1290
A.4.5.6.4.1.2 Test Requirements 1294
A.4.5.6.4.2 E-UTRAN – NR FR1 PSCell SCell dormancy switch of two FR1 SCells inside active time 1294
A.4.5.6.4.2.1 Test Purpose and Environment 1294
A.4.5.6.4.2.2 Test Requirements 1301
A.4.5.6.5 SCell dormancy switch 1302
A.4.5.6.5.1 E-UTRAN – NR FR1 PSCell SCell dormancy switch of single FR1 SCell outside active time 1302
A.4.5.6.5.1.1 Test Purpose and Environment 1302
A.4.5.6.5.1.2 Test Requirements 1307
A.4.5.6.5.2 E-UTRAN – NR FR1 PSCell SCell dormancy switch of two FR1 SCells inside active time 1308
A.4.5.6.5.2.1 Test Purpose and Environment 1308
A.4.5.6.5.2.2 Test Requirements 1311
A.4.5.7 PSCell addition and release delay 1312
A.4.5.7.1 Addition and Release Delay of known NR PSCell 1312
A.4.5.7.1.1 Test purpose and environment 1312
A.4.5.7.1.2 Test Requirements 1315
A.4.5.8 DL Interruptions at switching between two uplink carriers 1315
A.4.5.8.1 Test Purpose and Environment 1315
A.4.5.8.2 Test Requirements 1318
A.4.5.9 UE specific CBW change 1318
A.4.5.9.1 UE specific CBW change on FR1 NR PSCell with non-DRX in synchronous EN- DC 1318
A.4.5.9.1.1 Test Purpose and Environment 1318
A.4.5.9.1.2 Test Requirements 1321
A.4.5.10 PSCell activation and deactivation delay 1321
A.4.5.10.1 PSCell activation and deactivation delay 1321
A.4.5.10.1.1 Test purpose and environment 1321
A.4.5.9.1.2 Test Requirements 1324
A.4.5.11 Conditional PSCell addition and release delay (FR1 EN-DC) 1324

A.4.5.11.1 Addition and Release Delay of PSCell....1324
A.4.5.11.1.1 Test purpose and environment....1324
A.4.5.11.1.2 Test Parameters....1325
A.4.5.11.1.3 Test Requirements....1327
A.4.6 Measurement procedure....1328
A.4.6.1 Intra-frequency Measurements....1328
A.4.6.1.1 EN-DC event triggered reporting tests without gap under non-DRX....1328
A.4.6.1.1.1 Test purpose and Environment....1328
A.4.6.1.1.2 Test parameters....1328
A.4.6.1.1.3 Test Requirements....1330
A.4.6.1.2 EN-DC event triggered reporting tests without gap under DRX....1330
A.4.6.1.2.1 Test purpose and Environment....1330
A.4.6.1.2.2 Test parameters....1330
A.4.6.1.2.2 Test Requirements....1332
A.4.6.1.3 EN-DC event triggered reporting tests with per-UE gaps under non-DRX....1333
A.4.6.1.3.1 Test purpose and Environment....1333
A.4.6.1.3.2 Test parameters....1333
A.4.6.1.3.3 Test Requirements....1335
A.4.6.1.4 EN-DC event triggered reporting tests with per-UE gaps under DRX....1335
A.4.6.1.4.1 Test purpose and Environment....1335
A.4.6.1.4.2 Test parameters....1336
A.4.6.1.4.3 Test Requirements....1338
A.4.6.1.5 EN-DC event triggered reporting tests without gap under non-DRX with SSB index reading....1338
A.4.6.1.5.1 Test purpose and Environment....1338
A.4.6.1.5.2 Test parameters....1339
A.4.6.1.5.3 Test Requirements....1340
A.4.6.1.6 EN-DC event triggered reporting tests with SSB index reading with per-UE gaps....1340
A.4.6.1.6.1 Test purpose and Environment....1340
A.4.6.1.6.2 Test parameters....1341
A.4.6.1.6.3 Test Requirements....1342
A.4.6.1.7 EN-DC event triggered reporting tests under DRX for UE configured with highSpeedMeasFlag-r16....1343
A.4.6.1.7.1 Test purpose and Environment....1343
A.4.6.1.7.2 Test parameters....1343
A.4.6.1.7.3 Test Requirements....1345
A.4.6.1.8 EN-DC event triggered reporting tests for FR1 cell without SSB time index detection when DRX is used for UE configured with *highSpeedMeasCA-Scell-r17*....1345
A.4.6.1.8.1 Test Purpose and Environment....1345
A.4.6.1.8.2 Test Requirements....1349
A.4.6.2 Inter-frequency Measurements....1349
A.4.6.2.1 EN-DC event triggered reporting tests for FR1 cell without SSB time index detection when DRX is not used....1349
A.4.6.2.1.1 Test Purpose and Environment....1349
A.4.6.2.1.2 Test Requirements....1352
A.4.6.2.2 EN-DC event triggered reporting tests for FR1 cell without SSB time index detection when DRX is used....1352
A.4.6.2.2.1 Test Purpose and Environment....1352
A.4.6.2.2.2 Test Requirements....1355
A.4.6.2.3 Void....1356
A.4.6.2.4 Void....1356
A.4.6.2.5 EN-DC event triggered reporting tests for FR1 cell with SSB time index detection when DRX is not used....1356
A.4.6.2.5.1 Test Purpose and Environment....1356
A.4.6.2.5.2 Test Requirements....1359
A.4.6.2.6 EN-DC event triggered reporting tests for FR1 cell with SSB time index detection when DRX is used....1359
A.4.6.2.6.1 Test Purpose and Environment....1359
A.4.6.2.6.2 Test Requirements....1362
A.4.6.2.7 Void....1363
A.4.6.2.8 Void....1363
A.4.6.2.9 EN-DC event triggered reporting tests for FR1 cell without SSB time index detection when DRX is used for UE configured with highSpeedMeasInterFreq-r17....1363

A.4.6.2.9.1 Test Purpose and Environment 1363
A.4.6.2.9.2 Test Requirements 1366
A.4.6.3 Void 1367
A.4.6.4 L1-RSRP measurement for beam reporting 1367
A.4.6.4.1 SSB based L1-RSRP measurement when DRX is not used 1367
A.4.6.4.1.1 Test Purpose and Environment 1367
A.4.6.4.1.2 Test parameters 1367
A.4.6.4.1.3 Test Requirements 1369
A.4.6.4.2 SSB based L1-RSRP measurement when DRX is used 1369
A.4.6.4.2.1 Test Purpose and Environment 1369
A.4.6.4.2.2 Test parameters 1369
A.4.6.4.2.3 Test Requirements 1371
A.4.6.4.3 CSI-RS based L1-RSRP measurement when DRX is not used 1371
A.4.6.4.3.1 Test Purpose and Environment 1371
A.4.6.4.3.2 Test parameters 1372
A.4.6.4.3.3 Test Requirements 1373
A.4.6.4.4 CSI-RS based L1-RSRP measurement when DRX is used 1374
A.4.6.4.4.1 Test Purpose and Environment 1374
A.4.6.4.4.2 Test parameters 1374
A.4.6.4.4.3 Test Requirements 1376
A.4.6.4.5 SSB based L1-RSRP measurement when DRX is used for UE configured with *highSpeedMeasFlag-r16* 1376
A.4.6.4.5.1 Test Purpose and Environment 1376
A.4.6.4.5.2 Test parameters 1376
A.4.6.4.5.3 Test Requirements 1378
A.4.6.5 CLI measurements 1378
A.4.6.5.1 SRS-RSRP measurement with non-DRX 1378
A.4.6.5.1.1 Test Purpose and Environment 1378
A.4.6.5.1.2 Test Parameters 1379
A.4.6.5.1.3 Test Requirements 1381
A.4.6.5.2 CLI-RSSI measurement with non-DRX 1381
A.4.6.5.2.1 Test Purpose and Environment 1381
A.4.6.5.2.2 Test Parameters 1381
A.4.6.5.2.3 Test Requirements 1383
A.4.6.6.1.2 Test Requirements 1386
A.4.6.7 L1-SINR measurement for beam reporting 1387
A.4.6.7.2 L1-SINR measurement with SSB based CMR and dedicated IMR when DRX is used 1389
A.4.6.7.2.1 Test Purpose and Environment 1389
A.4.6.7.2.2 Test parameters 1390
A.4.6.7.2.3 Test Requirements 1392
A.4.6.7.3 L1-SINR measurement with CSI-RS based CMR and dedicated IMR configured when DRX is used 1392
A.4.6.7.3.1 Test Purpose and Environment 1392
A.4.6.7.3.2 Test parameters 1392
A.4.6.7.3.3 Test Requirements 1394
A.4.6.8 CSI-RS based intra-frequency Measurement 1394
A.4.6.8.1 EN-DC event triggered reporting tests without gap under DRX 1394
A.4.6.8.1.1 Test purpose and Environment 1394
A.4.6.8.1.2 Test Requirements 1397
A.4.6.9 CSI-RS based inter-frequency Measurement 1397
A.4.6.9.1 EN-DC event triggered reporting tests for FR1 cell when non-DRX is used 1397
A.4.6.9.1.1 Test Purpose and Environment 1397
A.4.6.9.1.2 Test Requirements 1400
A.4.7 Measurement Performance requirements 1400
A.4.7.1 SS-RSRP 1401
A.4.7.1.1 EN-DC Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell 1401
A.4.7.1.1.1 Test Purpose and Environment 1401
A.4.7.1.1.2 Test parameters 1401
A.4.7.1.1.3 Test Requirements 1404
A.4.7.1.2 EN-DC inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell 1404
A.4.7.1.2.1 Test Purpose and Environment 1404
A.4.7.1.2.2 Test parameters 1404

A.4.7.1.2.3 Test Requirements 1407
A.4.7.1.3 Void 1407
A.4.7.2 SS-RSRQ 1407
A.4.7.2.1 EN-DC Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell 1407
A.4.7.2.1.1 Test Purpose and Environment 1407
A.4.7.2.1.2 Test Parameters 1407
A.4.7.2.1.3 Test Requirements 1411
A.4.7.2.2 EN-DC Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell 1411
A.4.7.2.2.1 Test Purpose and Environment 1411
A.4.7.2.2.2 Test Parameters 1411
A.4.7.2.2.3 Test Requirements 1414
A.4.7.3 SS-SINR 1415
A.4.7.3.1 EN-DC Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell 1415
A.4.7.3.1.1 Test Purpose and Environment 1415
A.4.7.3.1.2 Test Parameters 1415
A.4.7.3.1.3 Test Requirements 1418
A.4.7.3.2 EN-DC Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell 1418
A.4.7.3.2.1 Test Purpose and Environment 1418
A.4.7.3.2.2 Test Parameters 1418
A.4.7.3.2.3 Test Requirements 1421
A.4.7.4 L1-RSRP measurement for beam reporting 1421
A.4.7.4.1 SSB based L1-RSRP measurement 1421
A.4.7.4.1.1 Test Purpose and Environment 1421
A.4.7.4.1.2 Test parameters 1422
A.4.7.4.1.3 Test Requirements 1424
A.4.7.4.2 CSI-RS based L1-RSRP measurement on resource set with repetition off 1425
A.4.7.4.2.1 Test Purpose and Environment 1425
A.4.7.4.2.2 Test parameters 1425
A.4.7.4.2.3 Test Requirements 1428
A.4.7.5 SFTD accuracy 1428
A.4.7.5.1 SFTD accuracy 1428
A.4.7.5.1.1 Test Purpose and Environment 1428
A.4.7.5.1.2 Test Parameters 1428
A.4.7.5.1.3 Test Requirements 1431
A.4.7.5.2 Void 1431
A.4.7.5.3 Void 1431
A.4.7.6 CLI measurements 1431
A.4.7.6.1 EN-DC SRS-RSRP measurement accuracy with FR1 serving cell 1431
A.4.7.6.1.1 Test Purpose and Environment 1431
A.4.7.6.1.2 Test parameters 1431
A.4.7.6.1.3 Test Requirements 1435
A.4.7.6.2 EN-DC CLI-RSSI measurement accuracy with FR1 serving cell 1435
A.4.7.6.2.1 Test Purpose and Environment 1435
A.4.7.6.2.2 Test parameters 1435
A.4.7.6.2.3 Test Requirements 1437
A.4.7.7 L1-SINR measurement for beam reporting 1437
A.4.7.7.2 L1-SINR measurement with SSB based CMR and dedicated IMR 1441
A.4.7.7.2.1 Test Purpose and Environment 1441
A.4.7.7.2.2 Test parameters 1441
A.4.7.7.2.3 Test Requirements 1444
A.4.7.7.3 L1-SINR measurement with CSI-RS based CMR and dedicated IMR 1444
A.4.7.7.3.1 Test Purpose and Environment 1444
A.4.7.7.3.2 Test parameters 1445
A.4.7.7.3.3 Test Requirements 1448
A.4.7.8 CSI-RSRP 1448
A.4.7.8.1 EN-DC Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell 1448
A.4.7.8.1.1 Test Purpose and Environment 1448
A.4.7.8.1.2 Test parameters 1448
A.4.7.8.1.3 Test Requirements 1451
A.4.7.8.2 EN-DC inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell 1451
A.4.7.8.2.1 Test Purpose and Environment 1451
A.4.7.8.2.2 Test parameters 1452

A.4.7.8.2.3 Test Requirements 1455
A.4.7.9 CSI-RSRQ 1455
A.4.7.9.1 EN-DC Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell 1455
A.4.7.9.1.1 Test Purpose and Environment 1455
A.4.7.9.1.2 Test Parameters 1456
A.4.7.9.1.3 Test Requirements 1459
A.4.7.9.2 EN-DC Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell 1459
A.4.7.9.2.1 Test Purpose and Environment 1459
A.4.7.9.2.2 Test Parameters 1459
A.4.7.9.2.3 Test Requirements 1463
A.4.7.10 CSI-SINR 1464
A.4.7.10.1 EN-DC Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell 1464
A.4.7.10.1.1 Test Purpose and Environment 1464
A.4.7.10.1.2 Test Parameters 1464
A.4.7.10.1.3 Test Requirements 1467
A.4.7.10.2 EN-DC Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell 1467
A.4.7.10.2.1 Test Purpose and Environment 1467
A.4.7.10.2.2 Test Parameters 1467
A.4.7.10.2.3 Test Requirements 1470
A.4.8 Void 1470

A.4A NE-DC test with all NR cells in FR1 1471
A.4A.1 Signaling characteristics 1471
A.4A.1.1 E-UTRAN PSCell addition 1471
A.4A.1.1.1 Test purpose and environment 1471
A.4A.1.1.2 Test Requirements 1475
A.4A.1.2 Active BWP switch 1475
A.4A.1.2.1 E-UTRAN PSCell – NR PCell FR1 DCI-based and Timer-based DL active BWP switch in non-DRX in synchronous NE-DC 1475
A.4A.1.2.1.1 Test Purpose and Environment 1475
A.4A.1.2.1.2 Test Requirements 1478
A.4A.1.3 Intra-frequency handover with E-UTRAN PSCell 1479
A.4A.1.3.1 Test purpose and environment 1479
A.4A.1.3.2 Test Requirements 1483
A.4A.1.4 Handover with PSCell from NE-DC to NE-DC with unknown target PSCell 1483
A.4A.1.4.1 Test Purpose and Environment 1483
A.4A.1.4.2 Test Parameters 1483
A.4A.1.4.3 Test Requirements 1487
A.4A.1.4.3.1 Test Requirements for NR HO 1487
A.4A.1.4.3.2 Test Requirements for LTE PSCell Change 1487
A.4A.2 Measurement performance 1488
A.4A.2.1 SFTD accuracy 1488
A.4A.2.1.1 SFTD accuracy 1488
A.4A.2.1.1.1 Test Purpose 1488
A.4A.2.1.1.2 Test Environment 1488
A.4A.2.1.1.3 Test Requirements 1491

A.5 EN-DC tests with one or more NR cells in FR2 1491
A.5.1 Void 1491
A.5.2 Void 1491
A.5.3 RRC_CONNECTED state mobility 1491
A.5.3.1 Void 1491
A.5.3.2 RRC Connection Mobility Control 1491
A.5.3.2.1 Void 1491
A.5.3.2.2 Random Access 1491
A.5.3.2.2.1 4-step RA type c ontention based random access test in FR2 for PSCell/SCell in EN-DC 1491
A.5.3.2.2.2 4-step RA type non-contention based random access test in FR2 for PSCell/SCell in EN-DC 1495
A.5.3.2.2.3 2-step RA type contention based random access test in FR2 for PSCell/SCell in EN-DC 1498
A.5.3.2.2.4 2-step RA type non-contention based random access test in FR2 for PSCell/SCell in EN-DC 1501
A.5.3.2.3 Void 1504
A.5.3.3 Handover with PSCell with known FR2 target PSCell 1504
A.5.3.3.1 Test purpose and environment 1504

A.5.3.3.2 Test Requirements 1507
A.5.5.3.3 PUCCH SCell Activation and deactivation of known SCell in FR2 1508
A.5.5.3.3.1 Test Purpose and Environment 1508
A.5.5.3.3.2 Test Requirements 1511
A.5.5.3.4 PUCCH SCell Activation and deactivation of unknown SCell in FR2 1511
A.5.5.3.4.1 Test Purpose and Environment 1511
A.5.5.3.4.2 Test Requirements 1514
A.5.5.3.5 Multiple SCell activation and deactivation of one known PUCCH SCell and one unknown SCell in FR2 1514
A.5.5.3.5.1 Test Purpose and Environment 1514
A.5.5.3.5.2 Test Requirements 1518
A.5.5.3.6 SCell Activation and deactivation of unknown PUCCH SCell and unknown DL SCell in FR2 in non-DRX 1519
A.5.5.3.6.1 Test Purpose and Environment 1519
A.5.5.3.6.2 Test Requirements 1521
A.5.4 Timing 1523
A.5.4.1 UE transmit timing 1523
A.5.4.1.1 NR UE Transmit Timing Test for FR2 1523
A.5.4.1.1.1 Test Purpose and environment 1523
A.5.4.1.1.2 Test requirements 1525
A.5.4.2 UE timer accuracy 1526
A.5.4.3 Timing advance 1526
A.5.4.3.1 EN-DC FR2 timing advance adjustment accuracy 1526
A.5.4.3.1.1 Test Purpose and Environment 1526
A.5.4.3.1.2 Test Parameters 1526
A.5.4.3.1.3 Test Requirements 1528
A.5.5 Signaling characteristics 1529
A.5.5.1 Radio link Monitoring 1529
A.5.5.1.1 Radio Link Monitoring Out-of-sync Test for FR2 PSCell configured with SSB-based RLM RS in non-DRX mode 1529
A.5.5.1.1.1 Test Purpose and Environment 1529
A.5.5.1.1.2 Test Requirements 1532
A.5.5.1.2 Radio Link Monitoring In-sync Test for FR2 PSCell configured with SSB-based RLM RS in non-DRX mode 1532
A.5.5.1.2.1 Test Purpose and Environment 1532
A.5.5.1.2.2 Test Requirements 1536
A.5.5.1.3 Radio Link Monitoring Out-of-sync Test for FR2 PSCell configured with SSB-based RLM RS in DRX mode 1536
A.5.5.1.3.1 Test Purpose and Environment 1536
A.5.5.1.3.2 Test Requirements 1539
A.5.5.1.4 Radio Link Monitoring In-sync Test for FR2 PSCell configured with SSB-based RLM RS in DRX mode 1539
A.5.5.1.4.1 Test Purpose and Environment 1539
A.5.5.1.4.2 Test Requirements 1542
A.5.5.1.5 EN-DC Radio Link Monitoring Out-of-sync Test for FR2 PSCell configured with CSI-RS-based RLM in non-DRX mode 1543
A.5.5.1.6 EN-DC Radio Link Monitoring In-sync Test for FR2 PSCell configured with CSI-RS-based RLM in non-DRX mode 1546
A.5.5.1.7 EN-DC Radio Link Monitoring Out-of-sync Test for FR2 PSCell configured with CSI-RS-based RLM in DRX mode 1550
A.5.5.1.8 EN-DC Radio Link Monitoring In-sync Test for FR2 PSCell configured with CSI-RS-based RLM in DRX mode 1554
A.5.5.1.8.2 Test Requirements 1558
A.5.5.1.9 EN-DC Radio Link Monitoring UE Scheduling Restrictions on FR2 1558
A.5.5.1.9.1 Test Purpose and Environment 1558
A.5.5.1.9.2 Test Requirements 1560
A.5.5.1.10 Radio Link Monitoring Out-of-sync Test for FR2 PSCell configured with SSB-based RLM RS for UE fulfilling relaxed measurement criterion 1561
A.5.5.1.10.1 Test Purpose and Environment 1561
A.5.5.1.10.2 Test Requirements 1563
A.5.5.2 Interruption 1564

A.5.5.2.1 E-UTRAN – NR FR2 interruptions at transitions between active and non-active during DRX in synchronous EN-DC 1564
A.5.5.2.1.1 Test Purpose and Environment 1564
A.5.5.2.1.2 Test Requirements 1566
A.5.5.2.2 E-UTRAN – NR FR2 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC 1566
A.5.5.2.2.1 Test Purpose and Environment 1566
A.5.5.2.2.2 Test Requirements 1568
A.5.5.2.3 E-UTRAN – NR FR2 interruptions during measurements on deactivated NR SCC in synchronous EN-DC 1569
A.5.5.2.3.1 Test Purpose and Environment 1569
A.5.5.2.3.2 Test Requirements 1571
A.5.5.2.4 E-UTRAN – NR FR2 interruptions during measurements on deactivated NR SCC in asynchronous EN-DC 1572
A.5.5.2.4.1 Test Purpose and Environment 1572
A.5.5.2.4.2 Test Requirements 1574
A.5.5.2.5 E-UTRAN – NR FR2 interruptions during measurements on deactivated E-UTRAN SCC in synchronous EN-DC 1575
A.5.5.2.5.1 Test Purpose and Environment 1575
A.5.5.2.5.2 Test Requirements 1577
A.5.5.2.6 E-UTRAN – NR FR2 interruptions during measurements on deactivated E-UTRAN SCC in asynchronous EN-DC 1577
A.5.5.2.6.1 Test Purpose and Environment 1577
A.5.5.2.6.2 Test Requirements 1579
A.5.5.2.7 E-UTRAN – NR FR2 interruptions at E-UTRA SRS carrier based switching 1580
A.5.5.2.7.1 Test Purpose and Environment 1580
A.5.5.2.7.2 Test Requirements 1582
A.5.5.2.8 E-UTRAN – NR FR2 interruptions at NR SRS carrier based switching 1582
A.5.5.2.8.1 Test Purpose and Environment 1582
A.5.5.2.8.3 Test Requirements 1585
A.5.5.3 SCell Activation and Deactivation Delay 1585
A.5.5.3.1 SCell Activation and deactivation of SCell in FR2 intra-band 1585
A.5.5.3.1.1 Test Purpose and Environment 1585
A.5.5.3.1.2 Test Requirements 1587
A.5.5.3.2 SCell Activation and deactivation of known SCell in FR1 for 160ms SCell measurement cycle 1587
A.5.5.3.2.1 Test Purpose and Environment 1587
A.5.5.3.2.2 Test Requirements 1589
A.5.5.3.3 Void 1589
A.5.5.3.4 Void 1589
A.5.5.3.5 SCell Activation and deactivation of SCell in FR2 1589
A.5.5.3.5.1 Test Purpose and Environment 1589
A.5.5.3.5.2 Test Requirements 1592
A.5.5.3.6 Multiple SCell Activation and deactivation of one unknown SCell and one known SCell in FR2 1593
A.5.5.3.6.1 Test Purpose and Environment 1593
A.5.5.3.6.2 Test Requirements 1596
A.5.5.3.7 Direct SCell activation at SCell addition of known SCell in FR2 1596
A.5.5.3.7.1 Test Purpose and Environment 1596
A.5.5.3.7.2 Test Requirements 1599
A.5.5.3.8 Fast SCell Activation of SCell in FR2 intra-band 1599
A.5.5.3.8.1 Test Purpose and Environment 1599
A.5.5.3.8.2 Test Requirements 1602
A.5.5.4 Void 1603
A.5.5.5 Beam Failure Detection and Link recovery procedures 1603
A.5.5.5.1 EN-DC Beam Failure Detection and Link Recovery Test for FR2 PSCell configured with SSB-based BFD and LR in non-DRX mode 1603
A.5.5.5.1.1 Test Purpose and Environment 1603
A.5.5.5.1.2 Test Requirements 1607
A.5.5.5.2 EN-DC Beam Failure Detection and Link Recovery Test for FR2 PSCell configured with SSB-based BFD and LR in DRX mode 1607
A.5.5.5.2.1 Test Purpose and Environment 1607
A.5.5.5.2.2 Test Requirements 1611

A.5.5.5.3 EN-DC Beam Failure Detection and Link Recovery Test for FR2 PSCell configured with CSI-RS-based BFD and LR in non-DRX mode 1611
A.5.5.5.3.1 Test Purpose and Environment 1611
A.5.5.5.3.2 Test Requirements 1615
A.5.5.5.4 EN-DC Beam Failure Detection and Link Recovery Test for FR2 PSCell configured with CSI-RS-based BFD and LR in DRX mode 1615
A.5.5.5.4.1 Test Purpose and Environment 1615
A.5.5.5.4.2 Test Requirements 1619
A.5.5.5.5 EN-DC scheduling availability restriction during Beam Failure Detection and Link Recovery for FR2 PSCell configured with SSB-based BFD and LR in non-DRX mode 1619
A.5.5.5.5.1 Test Purpose and Environment 1619
A.5.5.5.5.2 Test Requirements 1623
A.5.5.5.6 EN-DC Beam Failure Detection and Link Recovery Test for FR2 SCell configured with CSI-RS-based BFD and LR in non-DRX mode 1623
A.5.5.5.6.1 Test Purpose and Environment 1623
A.5.5.5.6.2 Test Requirements 1627
A.5.5.5.7 EN-DC Beam Failure Detection and Link Recovery Test for FR2 SCell configured with CSI-RS-based BFD and LR in DRX mode 1627
A.5.5.5.7.1 Test Purpose and Environment 1627
A.5.5.5.7.2 Test Requirements 1631
A.5.5.5.8 EN-DC TRP specific Beam Failure Detection and Link Recovery Test for FR2 PSCell configured with CSI-RS-based BFD and LR in DRX mode 1631
A.5.5.5.8.1 Test Purpose and Environment 1631
A.5.5.5.8.2 Test Requirements 1635
A.5.5.5.9 Beam Failure Detection and Link Recovery Test for FR2 PSCell configured with SSB-based BFD and LR in DRX mode for UE fulfilling relaxed measurement criterion 1635
A.5.5.5.9.1 Test Purpose and Environment 1635
A.5.5.5.9.2 Test Requirements 1639
A.5.5.6 Active BWP switch 1639
A.5.5.6.1 DCI-based and Timer-based Active BWP Switch 1639
A.5.5.6.1.1 E-UTRAN – NR PSCell FR2 DL active BWP switch with non-DRX in synchronous EN-DC 1639
A.5.5.6.1.1.1 Test Purpose and Environment 1639
A.5.5.6.1.1.2 Test Requirements 1642
A.5.5.6.1.2 E-UTRAN – NR PSCell FR2 with FR2 SCell DL active BWP switch in non-DRX in synchronous EN-DC 1643
A.5.5.6.2 RRC-based Active BWP Switch 1647
A.5.5.6.2.1 E-UTRAN – NR PSCell FR2 DL active BWP switch with non-DRX in synchronous EN-DC 1647
A.5.5.6.3 Simultaneous DCI-based and Timer-based Active BWP Switch on multiple CCs 1650
A.5.5.6.3.1 E-UTRAN – NR PSCell FR2 and NR SCell FR2 DL active BWP switch on multiple CCs in synchronous EN-DC 1650
A.5.5.6.3.1.1 Test Purpose and Environment 1650
A.5.5.6.3.1.2 Test Requirements 1653
A.5.5.6.4 SCell dormancy switch 1654
A.5.5.6.4.1 E-UTRAN – NR FR2 PSCell SCell dormancy switch of single FR2 SCell inside active time 1654
A.5.5.6.4.1.1 Test Purpose and Environment 1654
A.5.5.6.4.1.2 Test Requirements 1657
A.5.5.6.4.2 E-UTRAN – NR FR1 PSCell SCell dormancy switch of two FR2 SCells outside active time 1657
A.5.5.6.4.2.1 Test Purpose and Environment 1657
A.5.5.6.4.2.2 Test Requirements 1662
A.5.5.6.5 Simultaneous RRC-based Active BWP Switch on multiple CCs 1662
A.5.5.6.5.1 E-UTRAN – NR PSCell FR2 and NR SCell FR2 DL active BWP switch on multiple CCs with non-DRX in synchronous EN-DC 1662
A.5.5.7 PSCell addition and release delay 1666
A.5.5.7.1 Addition and Release Delay of NR PSCell 1666
A.5.5.7.1.1 Test purpose and environment 1666
A.5.5.7.1.2 Test Requirements 1668
A.5.5.8 Active TCI state switch delay 1669
A.5.5.8.1 MAC-CE based active TCI state switch 1669
A.5.5.8.1.1 E-UTRAN – NR PSCell FR2 active TCI state switch for a known TCI state 1669
A.5.5.8.1.1.1 Test Purpose and Environment 1669
A.5.5.8.1.1.2 Test Requirements 1672
A.5.5.8.2 RRC based active TCI state switch 1672

A.5.5.8.2.1 E-UTRAN – NR PSCell FR2 active TCI state switch for a known TCI state 1672
A.5.5.8.2.1.1 Test Purpose and Environment 1672
A.5.5.8.2.1.2 Test Requirements 1676
A.5.5.9 Uplink spatial relation switch delay 1676
A.5.5.9.1 MAC-CE based uplink spatial relation switch 1676
A.5.5.9.1.1 E-UTRAN – NR PSCell FR2 uplink spatial relation switch for a known spatial relation 1676
A.5.5.9.1.1.1 Test Purpose and Environment 1676
A.5.5.9.1.1.2 Test Requirements 1679
A.5.5.9.2 RRC based spatial relation switch 1679
A.5.5.9.2.1 E-UTRAN – NR PSCell FR2 spatial relation switch associated with a known DL-RS 1679
A.5.5.9.2.1.1 Test Purpose and Environment 1679
A.5.5.9.2.1.2 Test Requirements 1681
A.5.5.10 UE specific CBW change 1682
A.5.5.10.1 UE specific CBW change on FR2 NR PSCell 1682
A.5.5.10.1.1 Test Purpose and Environment 1682
A.5.5.10.1.2 Test Requirements 1685
A.5.5.11 Unified TCI state switch delay 1685
A.5.5.11.1 MAC-CE based active joint TCI state switch 1685
A.5.5.11.1.1 E-UTRAN – NR PSCell FR2 active joint TCI state switch for a known TCI state 1685
A.5.5.11.1.1.1 Test Purpose and Environment 1685
A.5.5.11.1.1.2 Test parameters 1686
A.5.5.11.1.1.3 Test Requirements 1687
A.5.5.11.2 MAC-CE based active uplink TCI state switch 1688
A.5.5.11.2.1 E-UTRAN – NR PSCell FR2 active uplink TCI state switch for a known TCI state 1688
A.5.5.11.2.1.1 Test Purpose and Environment 1688
A.5.5.11.2.1.2 Test parameters 1688
A.5.5.11.2.1.3 Test Requirements 1690
A.5.5.11.3 MAC-CE based active downlink TCI state switch 1691
A.5.5.11.3.1 E-UTRAN – NR PSCell FR2 downlink TCI state switch to cell with additional PCI for a known TCI state 1691
A.5.5.11.3.1.1 Test Purpose and Environment 1691
A.5.5.11.3.1.2 Test Parameters 1691
A.5.5.11.3.1.3 Test Requirements 1695
A.5.5.12 PSCell activation and deactivation delay 1695
A.5.5.12.1 PSCell activation and deactivation delay 1695
A.5.5.12.1.1 Test purpose and environment 1695
A.5.5.12.1.2 Test Requirements 1698
A.5.5.13 Conditional PSCell addition and release delay 1698
A.5.5.13.1 Addition and Release Delay of NR PSCell 1698
A.5.5.13.1.1 Test purpose and environment 1698
A.5.5.13.1.2 Test Requirements 1701
A.5.6 Measurement procedure 1701
A.5.6.1 Intra-frequency Measurements 1701
A.5.6.1.1 EN-DC event triggered reporting test without gap under non-DRX 1701
A.5.6.1.1.1 Test purpose and Environment 1701
A.5.6.1.1.2 Test Requirements 1704
A.5.6.1.2 EN-DC event triggered reporting test without gap under DRX 1704
A.5.6.1.2.1 Test purpose and Environment 1704
A.5.6.1.2.2 Test Requirements 1707
A.5.6.1.3 EN-DC event triggered reporting test with per-UE gaps under non-DRX 1707
A.5.6.1.3.1 Test purpose and Environment 1707
A.5.6.1.3.2 Test Requirements 1710
A.5.6.1.4 EN-DC event triggered reporting test with per-UE gaps under DRX 1710
A.5.6.1.4.1 Test purpose and Environment 1710
A.5.6.1.4.2 Test Requirements 1713
A.5.6.2 Inter-frequency Measurements 1713
A.5.6.2.1 EN-DC event triggered reporting tests for FR2 cell without SSB time index detection when DRX is not used 1713
A.5.6.2.1.1 Test Purpose and Environment 1713
A.5.6.2.1.2 Test Requirements 1716
A.5.6.2.2 EN-DC event triggered reporting tests for FR2 cell without SSB time index detection when DRX is used 1716

A.5.6.2.2.1 Test Purpose and Environment 1716
A.5.6.2.2.2 Test Requirements 1719
A.5.6.2.3 EN-DC event triggered reporting tests for FR2 cell with SSB time index detection when DRX is not used 1720
A.5.6.2.3.1 Test Purpose and Environment 1720
A.5.6.2.3.2 Test Requirements 1722
A.5.6.2.4 EN-DC event triggered reporting tests for FR2 cell with SSB time index detection when DRX is used 1723
A.5.6.2.4.1 Test Purpose and Environment 1723
A.5.6.2.4.2 Test Requirements 1725
A.5.6.2.5 EN-DC event triggered reporting tests for FR2 cell without SSB time index detection when DRX is not used 1726
A.5.6.2.5.1 Test Purpose and Environment 1726
A.5.6.2.5.2 Test Requirements 1729
A.5.6.2.6 EN-DC event triggered reporting tests for FR2 cell without SSB time index detection when DRX is used 1729
A.5.6.2.6.1 Test Purpose and Environment 1729
A.5.6.2.6.2 Test Requirements 1733
A.5.6.2.7 EN-DC event triggered reporting tests for FR2 cell with SSB time index detection when DRX is not used 1733
A.5.6.2.7.1 Test Purpose and Environment 1733
A.5.6.2.7.2 Test Requirements 1737
A.5.6.2.8 EN-DC event triggered reporting tests for FR2 cell with SSB time index detection when DRX is used 1737
A.5.6.2.8.1 Test Purpose and Environment 1737
A.5.6.2.8.2 Test Requirements 1741
A.5.6.3 L1-RSRP measurement for beam reporting 1741
A.5.6.3.1 SSB based L1-RSRP measurement when DRX is not used 1741
A.5.6.3.1.1 Test Purpose and Environment 1741
A.5.6.3.1.2 Test parameters 1742
A.5.6.3.1.3 Test Requirements 1743
A.5.6.3.2 SSB based L1-RSRP measurement when DRX is used 1744
A.5.6.3.2.1 Test Purpose and Environment 1744
A.5.6.3.2.2 Test parameters 1744
A.5.6.3.2.3 Test Requirements 1746
A.5.6.3.3 CSI-RS based L1-RSRP measurement when DRX is not used 1746
A.5.6.3.3.1 Test Purpose and Environment 1746
A.5.6.3.3.2 Test parameters 1746
A.5.6.3.3.3 Test Requirements 1748
A.5.6.3.4 CSI-RS based L1-RSRP measurement when DRX is used 1748
A.5.6.3.4.1 Test Purpose and Environment 1748
A.5.6.3.4.2 Test parameters 1749
A.5.6.3.4.3 Test Requirements 1750
A.5.6.4 CLI measurements 1751
A.5.6.4.1 SRS-RSRP measurement with DRX 1751
A.5.6.4.1.1 Test Purpose and Environment 1751
A.5.6.4.1.2 Test Parameters 1751
A.5.6.4.1.3 Test Requirements 1753
A.5.6.4.2 CLI-RSSI measurement with DRX 1753
A.5.6.4.2.1 Test Purpose and Environment 1753
A.5.6.4.2.2 Test Parameters 1754
A.5.6.4.2.3 Test Requirements 1755
A.5.6.5 Measurements with autonomous gaps 1756
A.5.6.5.1 EN-DC inter-frequency CGI identification of NR neighbor cell in FR2 1756
A.5.6.5.1.1 Test Purpose and Environment 1756
A.5.6.5.1.2 Test Requirements 1758
A.5.6.6 L1-SINR measurement for beam reporting 1759
A.5.6.6.2 L1-SINR measurement with SSB based CMR and dedicated IMR when DRX is not used 1761
A.5.6.6.2.1 Test Purpose and Environment 1761
A.5.6.6.2.2 Test parameters 1761
A.5.6.6.2.3 Test Requirements 1764

A.5.6.6.3 L1-SINR measurement with CSI-RS based CMR and dedicated IMR configured when DRX is not used 1764
A.5.6.6.3.1 Test Purpose and Environment 1764
A.5.6.6.3.2 Test parameters 1764
A.5.6.6.3.3 Test Requirements 1766
A.5.6.7 CSI-RS based Intra-frequency Measurements 1766
A.5.6.7.1 EN-DC event triggered reporting test without gap under non-DRX 1766
A.5.6.7.1.1 Test purpose and Environment 1766
A.5.6.7.1.2 Test Requirements 1768
A.5.6.8 CSI-RS based Inter-frequency Measurements 1768
A.5.6.8.1 EN-DC event triggered reporting tests for NR FR2 cell when DRX is used 1768
A.5.6.8.1.1 Test Purpose and Environment 1768
A.5.6.8.1.2 Test Requirements 1771
A.5.7 Measurement Performance requirements 1771
A.5.7.1 SS-RSRP 1772
A.5.7.1.1 EN-DC intra-frequency case measurement accuracy with FR2 serving cell and FR2 target cell 1772
A.5.7.1.1.1 Test Purpose and Environment 1772
A.5.7.1.1.2 Test parameters 1772
A.5.7.1.1.3 Test Requirements 1774
A.5.7.1.2 EN-DC inter-frequency case measurement accuracy with FR2 serving cell and FR2 target cell 1775
A.5.7.1.2.1 Test Purpose and Environment 1775
A.5.7.1.2.2 Test parameters 1775
A.5.7.1.2.3 Test Requirements 1777
A.5.7.1.3 EN-DC inter-frequency measurement accuracy with FR1 serving cell and FR2 target cell 1778
A.5.7.1.3.1 Test Purpose and Environment 1778
A.5.7.1.3.2 Test parameters 1779
A.5.7.1.3.3 Test Requirements 1781
A.5.7.2 SS-RSRQ 1782
A.5.7.2.1 EN-DC Intra-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell 1782
A.5.7.2.1.1 Test Purpose and Environment 1782
A.5.7.2.1.2 Test Parameters 1782
A.5.7.2.1.3 Test Requirements 1784
A.5.7.2.2 EN-DC Inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell 1784
A.5.7.2.2.1 Test Purpose and Environment 1784
A.5.7.2.2.2 Test Parameters 1784
A.5.7.2.2.3 Test Requirements 1786
A.5.7.3 SS-SINR 1787
A.5.7.3.1 EN-DC Intra-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell 1787
A.5.7.3.1.1 Test Purpose and Environment 1787
A.5.7.3.1.2 Test Parameters 1787
A.5.7.3.1.3 Test Requirements 1789
A.5.7.3.2 EN-DC Inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell 1789
A.5.7.3.2.1 Test Purpose and Environment 1789
A.5.7.3.2.2 Test Parameters 1789
A.5.7.3.2.3 Test Requirements 1791
A.5.7.4 L1-RSRP measurement for beam reporting 1791
A.5.7.4.1 SSB based L1-RSRP measurement 1791
A.5.7.4.1.1 Test Purpose and Environment 1791
A.5.7.4.1.2 Test parameters 1791
A.5.7.4.1.3 Test Requirements 1793
A.5.7.4.2 CSI-RS based L1-RSRP measurement on resource set with repetition off 1794
A.5.7.4.2.1 Test Purpose and Environment 1794
A.5.7.4.2.2 Test parameters 1794
A.5.7.4.2.3 Test Requirements 1795
A.5.7.5 CLI measurements 1796
A.5.7.5.1 EN-DC SRS-RSRP measurement accuracy with FR2 serving cell 1796
A.5.7.5.1.1 Test Purpose and Environment 1796
A.5.7.5.1.2 Test parameters 1796
A.5.7.5.1.3 Test Requirements 1798
A.5.7.5.2 EN-DC CLI-RSSI measurement accuracy with FR2 serving cell 1799
A.5.7.5.2.1 Test Purpose and Environment 1799
A.5.7.5.2.2 Test parameters 1799

A.5.7.5.2.3 Test Requirements 1801
A.5.7.6 L1-SINR measurement for beam reporting 1801
A.5.7.6.2 L1-SINR measurement with SSB based CMR and dedicated IMR 1804
A.5.7.6.2.1 Test Purpose and Environment 1804
A.5.7.6.2.2 Test parameters 1804
A.5.7.6.2.3 Test Requirements 1806
A.5.7.6.3 L1-SINR measurement with CSI-RS based CMR and dedicated IMR 1807
A.5.7.6.3.1 Test Purpose and Environment 1807
A.5.7.6.3.2 Test parameters 1807
A.5.7.6.3.3 Test Requirements 1809
A.5.7.7 CSI-RSRP 1809
A.5.7.7.1 EN-DC intra-frequency case measurement accuracy with FR2 serving cell and FR2 target cell 1809
A.5.7.7.1.1 Test Purpose and Environment 1809
A.5.7.7.1.2 Test parameters 1809
A.5.7.7.1.3 Test Requirements 1811
A.5.7.7.2 EN-DC inter-frequency case measurement accuracy with FR2 serving cell and FR2 target cell 1812
A.5.7.7.2.1 Test Purpose and Environment 1812
A.5.7.7.2.2 Test parameters 1812
A.5.7.7.2.3 Test Requirements 1815
A.5.7.8 CSI-RSRQ 1816
A.5.7.8.1 EN-DC Intra-frequency measurement accuracy with FR2 serving cell and FR2 target cell 1816
A.5.7.8.1.1 Test Purpose and Environment 1816
A.5.7.8.1.2 Test Parameters 1816
A.5.7.8.1.3 Test Requirements 1817
A.5.7.8.2 EN-DC Inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell 1818
A.5.7.8.2.1 Test Purpose and Environment 1818
A.5.7.8.2.2 Test Parameters 1818
A.5.7.8.2.3 Test Requirements 1819
A.5.7.9 CSI-SINR 1820
A.5.7.9.1 EN-DC Intra-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell 1820
A.5.7.9.1.1 Test Purpose and Environment 1820
A.5.7.9.1.2 Test Parameters 1820
A.5.7.9.1.3 Test Requirements 1822
A.5.7.9.2 EN-DC Inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell 1822
A.5.7.9.2.1 Test Purpose and Environment 1822
A.5.7.9.2.2 Test Parameters 1822
A.5.7.9.2.3 Test Requirements 1824
A.5.8 Void 1824

A.6 NR standalone tests with all NR cells in FR1 1825
A.6.1 SA: RRC_IDLE state mobility 1825
A.6.1.1 Cell re-selection to NR 1825
A.6.1.1.1 Cell reselection to FR1 intra-frequency NR case 1825
A.6.1.1.1.1 Test Purpose and Environment 1825
A.6.1.1.1.2 Test Parameters 1825
A.6.1.1.1.3 Test Requirements 1827
A.6.1.1.2 Cell reselection to FR1 inter-frequency NR case 1828
A.6.1.1.2.1 Test Purpose and Environment 1828
A.6.1.1.2.2 Test Parameters 1828
A.6.1.1.2.3 Test Requirements 1830
A.6.1.1.3 Cell reselection to FR1 intra-frequency NR case for UE fulfilling low mobility relaxed measurement criterion 1830
A.6.1.1.3.1 Test Purpose and Environment 1830
A.6.1.1.3.2 Test Parameters 1831
A.6.1.1.3.3 Test Requirements 1833
A.6.1.1.4 Cell reselection to FR1 intra-frequency NR case for UE fulfilling not-at-cell edge relaxed measurement criterion 1834
A.6.1.1.4.1 Test Purpose and Environment 1834
A.6.1.1.4.2 Test Parameters 1834
A.6.1.1.4.3 Test Requirements 1836
A.6.1.1.5 Cell reselection to FR1 inter-frequency NR case for UE fulfilling low mobility relaxed measurement criterion 1836

A.6.1.1.5.1 Test Purpose and Environment 1836
A.6.1.1.5.2 Test Parameters 1836
A.6.1.1.5.3 Test Requirements 1841
A.6.1.1.6 Cell reselection to FR1 inter-frequency NR case for UE fulfilling not-at-cell edge relaxed measurement criterion 1842
A.6.1.1.6.1 Test Purpose and Environment 1842
A.6.1.1.6.2 Test Parameters 1842
A.6.1.1.6.3 Test Requirements 1846
A.6.1.1.7 Cell reselection to FR1 intra-frequency NR case for UE configured with *highSpeedMeasFlag-r16* 1847
A.6.1.1.7.1 Test Purpose and Environment 1847
A.6.1.1.7.2 Test Parameters 1847
A.6.1.1.7.3 Test Requirements 1849
A.6.1.1.8 Cell reselection to FR1 inter-frequency NR case for UE configured with *highSpeedMeasInterFreq-r17* 1850
A.6.1.1.8.1 Test Purpose and Environment 1850
A.6.1.1.8.2 Test Parameters 1850
A.6.1.1.8.3 Test Requirements 1852
A.6.1.2 Inter-RAT E-UTRAN cell re-selection 1853
A.6.1.2.1 Cell reselection to higher priority E-UTRAN 1853
A.6.1.2.1.1 Test Purpose and Environment 1853
A.6.1.2.1.2 Test Parameters 1853
A.6.1.2.1.3 Test Requirements 1856
A.6.1.2.2 Cell reselection to lower priority E-UTRAN 1856
A.6.1.2.2.1 Test Purpose and Environment 1856
A.6.1.2.2.2 Test Parameters 1856
A.6.1.2.2.3 Test Requirements 1859
A.6.1.2.3 Cell reselection to lower priority E-UTRAN for UE fulfilling low mobility relaxed measurement criterion 1859
A.6.1.2.3.1 Test Purpose and Environment 1859
A.6.1.2.3.2 Test Parameters 1859
A.6.1.2.3.3 Test Requirements 1862
A.6.1.2.4 Cell reselection to lower priority E-UTRAN for UE fulfilling not-at-cell edge relaxed measurement criterion 1863
A.6.1.2.4.1 Test Purpose and Environment 1863
A.6.1.2.4.2 Test Parameters 1863
A.6.1.2.4.3 Test Requirements 1866
A.6.1.2.5 Cell reselection to lower priority E-UTRAN cell for UE configured with highSpeedMeasFlag-r16 1866
A.6.1.2.5.1 Test Purpose and Environment 1866
A.6.1.2.5.2 Test Parameters 1866
A.6.1.2.5.3 Test Requirements 1869
A.6.1.1.7 Void 1869
A.6.2 SA: RRC_INACTIVE state mobility 1869
A.6.2.1 Configured Grant based Small Data Transmissions (CG-SDT) 1869
A.6.2.1.1 Test purpose and Environment 1869
A.6.2.1.2 Test Parameters 1870
A.6.2.1.3 Test requirements 1871
A.6.3 RRC_CONNECTED state mobility 1872
A.6.3.1 Handover 1872
A.6.3.1.1 Intra-frequency handover from FR1 to FR1; known target cell 1872
A.6.3.1.1.1 Test Purpose and Environment 1872
A.6.3.1.1.2 Test Parameters 1872
A.6.3.1.1.3 Test Requirements 1874
A.6.3.1.2 Intra-frequency handover from FR1 to FR1; unknown target cell 1874
A.6.3.1.2.1 Test Purpose and Environment 1874
A.6.3.1.2.2 Test Parameters 1874
A.6.3.1.2.3 Test Requirements 1876
A.6.3.1.3 Inter-frequency handover from FR1 to FR1; unknown target cell 1876
A.6.3.1.3.1 Test Purpose and Environment 1876
A.6.3.1.3.2 Test Parameters 1877
A.6.3.1.3.3 Test Requirements 1878

A.6.3.1.4 SA NR - E-UTRAN handover 1879
A.6.3.1.4.1 Test Purpose and Environment 1879
A.6.3.1.4.2 Test Requirements 1882
A.6.3.1.5 SA NR - E-UTRAN handover with unknown target cell 1882
A.6.3.1.5.1 Test Purpose and Environment 1882
A.6.3.1.5.2 Test Requirements 1886
A.6.3.1.6 SA NR - UTRAN FDD handover 1886
A.6.3.1.6.1 Test Purpose and Environment 1886
A.6.3.1.6.2 Test Requirements 1888
A.6.3.1.7 Intra-frequency synchronous DAPS handover in FR1 1889
A.6.3.1.7.1 Test Purpose and Environment 1889
A.6.3.1.7.2 Test Parameters 1889
A.6.3.1.7.3 Test Requirements 1891
A.6.3.1.8 Intra-frequency asynchronous DAPS handover in FR1 1892
A.6.3.1.8.1 Test Purpose and Environment 1892
A.6.3.1.8.2 Test Parameters 1892
A.6.3.1.8.3 Test Requirements 1894
A.6.3.1.9 Intra-band inter-frequency synchronous DAPS handover test in SA for FR1 1895
A.6.3.1.9.1 Test Purpose and Environment 1895
A.6.3.1.9.2 Test Parameters 1895
A.6.3.1.9.3 Test Requirements 1897
A.6.3.1.10 Intra-band inter-frequency asynchronous DAPS handover test in SA for FR1 1898
A.6.3.1.10.1 Test Purpose and Environment 1898
A.6.3.1.10.2 Test Parameters 1898
A.6.3.1.10.3 Test Requirements 1900
A.6.3.1.11 Inter-band inter-frequency synchronous DAPS handover from FR1 to FR1 1900
A.6.3.1.11.1 Test Purpose and Environment 1900
A.6.3.1.11.2 Test Parameters 1900
A.6.3.1.11.3 Test Requirements 1904
A.6.3.1.12 Inter-band inter-frequency asynchronous DAPS handover from FR1 to FR1 1905
A.6.3.1.12.1 Test Purpose and Environment 1905
A.6.3.1.12.2 Test Parameters 1905
A.6.3.1.12.3 Test Requirements 1909
A.6.3.1.13 SA NR - E-UTRAN with NR PSCell addition in FR1 1909
A.6.3.1.13.1 Test Purpose and Environment 1909
A.6.3.1.13.2 Test Requirements 1914
A.6.3.1.14 SA NR - E-UTRAN handover with NR FR1 PScell addition 1915
A.6.3.1.14.1 Test Purpose and Environment 1915
A.6.3.1.14.2 Test Requirements 1920
A.6.3.2 RRC Connection Mobility Control 1921
A.6.3.2.1 SA: RRC Re-establishment 1921
A.6.3.2.1.1 Intra-frequency RRC Re-establishment in FR1 1921
A.6.3.2.1.2 Inter-frequency RRC Re-establishment in FR1 1924
A.6.3.2.1.3 Intra-frequency RRC Re-establishment in FR1 without serving cell timing 1927
A.6.3.2.2 Random Access 1929
A.6.3.2.2.1 4-step RA type contention based random access test in FR1 for NR standalone 1929
A.6.3.2.2.2 4-step RA type non-contention based random access test in FR1 for NR standalone 1933
A.6.3.2.2.3 2-step RA type contention based random access test in FR1 for NR standalone 1936
A.6.3.2.2.4 2-step RA type non-contention based test in FR1 for NR standalone 1939
A.6.3.2.3 SA: RRC Connection Release with Redirection 1941
A.6.3.2.3.1 Redirection from NR in FR1 to NR in FR1 1941
A.6.3.2.3.2 Redirection from NR in FR1 to E-UTRAN 1944
A.6.3.3 Conditional handover 1947
A.6.3.3.1 Intra-frequency conditional handover from FR1 to FR1 1947
A.6.3.3.1.1 Test Purpose and Environment 1947
A.6.3.3.1.2 Test Parameters 1947
A.6.3.3.1.3 Test Requirements 1949
A.6.3.3.2 Inter-frequency conditional handover from FR1 to FR1 1950
A.6.3.3.2.1 Test Purpose and Environment 1950
A.6.3.3.2.2 Test Parameters 1950
A.6.3.3.2.3 Test Requirements 1952
A.6.4 Timing 1952

A.6.4.1 UE transmit timing 1952
A.6.4.1.1 NR UE Transmit Timing Test for FR1 1952
A.6.4.1.1.1 Test Purpose and environment 1952
A.6.4.1.1.2 Test requirements 1954
A.6.4.2 UE timer accuracy 1955
A.6.4.3 Timing advance 1955
A.6.4.3.1 SA FR1 timing advance adjustment accuracy 1955
A.6.4.3.1.1 Test Purpose and Environment 1955
A.6.4.3.1.2 Test Parameters 1955
A.6.4.3.1.3 Test Requirements 1958
A.6.5 Signalling characteristics 1958
A.6.5.1 Radio link Monitoring 1958
A.6.5.1.1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode 1959
A.6.5.1.1.1 Test Purpose and Environment 1959
A.6.5.1.1.2 Test Requirements 1962
A.6.5.1.2 Radio Link Monitoring In-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode 1962
A.6.5.1.2.1 Test Purpose and Environment 1962
A.6.5.1.2.2 Test Requirements 1966
A.6.5.1.3 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode 1966
A.6.5.1.3.1 Test Purpose and Environment 1966
A.6.5.1.3.2 Test Requirements 1970
A.6.5.1.4 Radio Link Monitoring In-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode 1970
A.6.5.1.4.1 Test Purpose and Environment 1970
A.6.5.1.4.2 Test Requirements 1973
A.6.5.1.5 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode 1973
A.6.5.1.5.1 Test Purpose and Environment 1973
A.6.5.1.5.2 Test Requirements 1976
A.6.5.1.6 Radio Link Monitoring In-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode 1977
A.6.5.1.6.1 Test Purpose and Environment 1977
A.6.5.1.6.2 Test Requirements 1980
A.6.5.1.7 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in DRX mode 1980
A.6.5.1.7.1 Test Purpose and Environment 1980
A.6.5.1.7.2 Test Requirements 1983
A.6.5.1.8 Radio Link Monitoring In-sync Test for FR1 PCell configured with CSI-RS-based RLM in DRX mode 1984
A.6.5.1.8.1 Test Purpose and Environment 1984
A.6.5.1.8.2 Test Requirements 1987
A.6.5.1.9 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM for UE fulfilling relaxed measurement criterion 1987
A.6.5.1.9.1 Test Purpose and Environment 1987
A.6.5.1.9.2 Test Requirements 1990
A.6.5.2 Interruption 1991
A.6.5.2.1 Interruptions during measurements on deactivated NR SCC in FR1 1991
A.6.5.2.1.2 Test Requirements 1994
A.6.5.2.2 SA interruptions at NR SRS carrier based switching 1995
A.6.5.2.2.1 Test Purpose and Environment 1995
A.6.5.2.2.2 Test Parameters 1995
A.6.5.2.2.3 Test Requirements 1997
A.6.5.2.3 SA interruptions at NR SRS antenna port switching with 1 SRS symbol in a slot in NR-CA 1997
A.6.5.2.3.1 Test Purpose and Environment 1997
A.6.5.2.3.2 Test Parameters 1998
A.6.5.2.3.3 Test Requirements 2000
A.6.5.2.4 SA interruptions at NR SRS antenna port switching 2000
A.6.5.2.4.1 Test Purpose and Environment 2000
A.6.5.2.4.2 Test Parameters 2001

A.6.5.2.4.3 Test Requirements 2003
A.6.5.3 SCell Activation and Deactivation Delay 2003
A.6.5.3.1 SCell Activation and deactivation of known SCell in FR1 in non-DRX for 160ms SCell measurement cycle 2003
A.6.5.3.1.1 Test Purpose and Environment 2003
A.6.5.3.1.2 Test Requirements 2008
A.6.5.3.2 SCell Activation and deactivation of known SCell in FR1 in non-DRX for 640 ms SCell measurement cycle 2009
A.6.5.3.2.1 Test Purpose and Environment 2009
A.6.5.3.2.2 Test Requirements 2009
A.6.5.3.3 SCell Activation and deactivation of unknown SCell in FR1 in non-DRX 2009
A.6.5.3.3.1 Test Purpose and Environment 2009
A.6.5.3.3.2 Test Requirements 2010
A.6.5.3.4 Direct SCell activation at SCell addition of known SCell in FR1 2010
A.6.5.3.4.1 Test Purpose and Environment 2010
A.6.5.3.4.2 Test Requirements 2013
A.6.5.3.5 Direct SCell activation at handover with known SCell in FR1 2013
A.6.5.3.5.1 Test Purpose and Environment 2013
A.6.5.3.5.2 Test Requirements 2017
A.6.5.3.4 Fast SCell Activation of known SCell in FR1 in non-DRX for 160ms SCell measurement cycle 2018
A.6.5.3.4.1 Test Purpose and Environment 2018
A.6.5.3.4.2 Test Requirements 2021
A.6.5.3.5 SCell Activation of known SCell in FR1 in non-DRX for 640 ms SCell measurement cycle 2022
A.6.5.3.5.1 Test Purpose and Environment 2022
A.6.5.3.5.2 Test Requirements 2022
A.6.5.3.6 PUCCH SCell Activation and deactivation of known SCell in FR1 2022
A.6.5.3.6.1 Test Purpose and Environment 2022
A.6.5.3.6.2 Test Requirements 2026
A.6.5.3.7 SCell Activation and deactivation of unknown SCell in FR1 in non-DRX 2026
A.6.5.3.7.1 Test Purpose and Environment 2026
A.6.5.3.7.2 Test Requirements 2030
A.6.5.3.8 SCell Activation and Deactivation of one FR1 known PUCCH SCell and one FR1 unknown SCell with single activation/deactivation command 2030
A.6.5.3.8.1 Test Purpose and Environment 2030
A.6.5.3.8.2 Test Requirements 2034
A.6.5.3.9 SCell Activation and deactivation of unknown PUCCH SCell and unknown DL SCell in FR1 in non-DRX 2035
A.6.5.3.9.1 Test Purpose and Environment 2035
A.6.5.3.9.2 Test Requirements 2038
A.6.5.4 UE UL carrier RRC reconfiguration Delay 2039
A.6.5.4.1 UE UL carrier RRC reconfiguration Delay 2039
A.6.5.4.1.1 Test Purpose and Environment 2039
A.6.5.4.1.2 Test Requirements 2046
A.6.5.4.2 Void 2047
A.6.5.5 Beam Failure Detection and Link recovery procedures 2047
A.6.5.5.1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in non-DRX mode 2047
A.6.5.5.1.1 Test Purpose and Environment 2047
A.6.5.5.2 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in DRX mode 2051
A.6.5.5.2.1 Test Purpose and Environment 2051
A.6.5.5.2.2 Test Requirements 2055
A.6.5.5.3 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with CSI-RS-based BFD and LR in non-DRX mode 2056
A.6.5.5.3.1 Test Purpose and Environment 2056
A.6.5.5.3.2 Test Requirements 2059
A.6.5.5.4 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with CSI-RS-based BFD and LR in DRX mode 2060
A.6.5.5.4.1 Test Purpose and Environment 2060
A.6.5.5.4.2 Test Requirements 2063
A.6.5.5.5 Beam Failure Detection and Link Recovery Test for FR1 SCell configured with CSI-RS-based BFD and SSB-based LR in non-DRX mode 2064

A.6.5.5.5.1 Test Purpose and Environment 2064
A.6.5.5.5.2 Test Requirements 2067
A.6.5.5.6 Beam Failure Detection and Link Recovery Test for FR1 SCell configured with CSI-RS-based BFD and SSB-based LR in DRX mode 2068
A.6.5.5.6.1 Test Purpose and Environment 2068
A.6.5.5.6.2 Test Requirements 2072
A.6.5.5.7 TRP Specific Beam Failure Detection and Link Recovery Test for FR1 PCell configured with CSI-RS-based BFD and LR in DRX mode 2072
A.6.5.5.7.1 Test Purpose and Environment 2072
A.6.5.5.7.2 Test Requirements 2076
A.6.5.6 Active BWP switch 2076
A.6.5.6.1 DCI-based and Timer-based Active BWP Switch 2076
A.6.5.6.1.1 NR FR1- NR FR1 DL active BWP switch of SCell with non-DRX in SA 2076
A.6.5.6.1.2 NR FR1 DL active BWP switch with non-DRX in SA 2082
A.6.5.6.2 RRC-based Active BWP Switch 2085
A.6.5.6.2.1 NR FR1 DL active BWP switch of Cell with non-DRX in SA 2085
A.6.5.6.3 Simultaneous DCI-based and Timer-based Active BWP Switch on multiple CCs 2088
A.6.5.6.3.1 NR FR1- NR FR1 DL active BWP switch on multiple CCs with non-DRX in SA 2088
A.6.5.6.3.1.1 Test Purpose and Environment 2088
A.6.5.6.3.1.2 Test Requirements 2093
A.6.5.6.4 SCell dormancy switch 2094
A.6.5.6.4.1 NR FR1 PCell SCell dormancy switch of single FR1 SCell outside active time 2094
A.6.5.6.4.1.1 Test Purpose and Environment 2094
A.6.5.6.4.1.2 Test Requirements 2099
A.6.5.6.4.2 NR FR1 PCell SCell dormancy switch of two FR1 SCells inside active time 2100
A.6.5.6.4.2.1 Test Purpose and Environment 2100
A.6.5.6.4.2.2 Test Requirements 2106
A.6.5.6.5 Simultaneous RRC-based Active BWP Switch on multiple CCs 2106
A.6.5.6.5.1 NR FR1- NR FR1 DL active BWP switch on multiple CCs with non-DRX in SA 2106
A.6.5.7 DL interruptions at switching between two uplink carriers 2110
A.6.5.7.1 DL interruptions at switching between two uplink carriers in FDD-TDD CA 2110
A.6.5.7.1.1 Test Purpose and Environment 2110
A.6.5.7.1.2 Test Requirements 2113
A.6.5.7.2 DL interruptions at switching between two uplink carriers in TDD-TDD CA 2113
A.6.5.7.2.1 Test Purpose and Environment 2113
A.6.5.7.2.2 Test Requirements 2115
A.6.5.7A DL interruptions at switching between two uplink carriers with two transmit antenna connectors 2116
A.6.5.7A.1 DL interruptions at switching between two uplink carriers in FDD-TDD CA 2116
A.6.5.7A.1.1 Test Purpose and Environment 2116
A.6.5.7A.1.2 Test Requirements 2118
A.6.5.7A.2 DL interruptions at switching between two uplink carriers in TDD-TDD CA 2118
A.6.5.7A.2.1 Test Purpose and Environment 2118
A.6.5.7A.2.2 Test Requirements 2120
A.6.5.7B DL interruptions at switching between one uplink band with one transmit antenna connector and one uplink band with two transmit antenna connectors 2121
A.6.5.7B.1 DL interruptions at switching between two uplink bands in FDD-TDD CA 2121
A.6.5.7B.1.1 Test Purpose and Environment 2121
A.6.5.7B.1.2 Test Requirements 2123
A.6.5.7B.2 DL interruptions at switching between two uplink bands in TDD-TDD CA 2123
A.6.5.7B.2.1 Test Purpose and Environment 2123
A.6.5.7B.2.2 Test Requirements 2126
A.6.5.7C DL interruptions at switching between two uplink bands with two transmit antenna connectors 2126
A.6.5.7C.1 DL interruptions at switching between two uplink bands with two transmit antenna connectors in FDD-TDD CA 2126
A.6.5.7C.1.1 Test Purpose and Environment 2126
A.6.5.7C.1.2 Test Requirements 2129
A.6.5.7C.2 DL interruptions at switching between two uplink bands with two transmit antenna connectors in TDD-TDD CA 2130
A.6.5.7C.2.1 Test Purpose and Environment 2130
A.6.5.7C.2.2 Test Requirements 2133
A.6.5.8 UE specific CBW change 2133
A.6.5.8.1 UE specific CBW change on PCell in FR1 in non-DRX 2133

A.6.5.8.1.1 Test Purpose and Environment 2133
A.6.5.8.1.2 Test Requirements 2136
A.6.5.9 Pathloss reference signal switching delay 2136
A.6.5.9.1 MAC-CE based pathloss reference signal switch delay 2136
A.6.5.9.1.1 Test Purpose and Environment 2136
A.6.5.9.1.2 Test Requirements 2139
A.6.6 Measurement procedure 2139
A.6.6.1 Intra-frequency Measurements 2139
A.6.6.1.1 SA event triggered reporting tests without gap under non-DRX 2139
A.6.6.1.1.1 Test purpose and Environment 2139
A.6.6.1.1.2 Test parameters 2139
A.6.6.1.1.3 Test Requirements 2141
A.6.6.1.2 SA event triggered reporting tests without gap under DRX 2141
A.6.6.1.2.1 Test purpose and Environment 2141
A.6.6.1.2.2 Test parameters 2142
A.6.6.1.2.3 Test Requirements 2144
A.6.6.1.3 SA event triggered reporting tests with per-UE gaps under non-DRX 2144
A.6.6.1.3.1 Test purpose and Environment 2144
A.6.6.1.3.2 Test parameters 2144
A.6.6.1.3.3 Test Requirements 2146
A.6.6.1.4 SA event triggered reporting tests with per-UE gaps under DRX 2146
A.6.6.1.4.1 Test purpose and Environment 2146
A.6.6.1.4.2 Test parameters 2146
A.6.6.1.4.3 Test Requirements 2149
A.6.6.1.5 SA event triggered reporting tests without gap under non-DRX with SSB index reading 2149
A.6.6.1.5.1 Test purpose and Environment 2149
A.6.6.1.5.2 Test parameters 2149
A.6.6.1.5.3 Test Requirements 2151
A.6.6.1.6 SA event triggered reporting tests with per-UE gaps under non-DRX with SSB index reading 2151
A.6.6.1.6.1 Test purpose and Environment 2151
A.6.6.1.6.2 Test parameters 2151
A.6.6.1.6.3 Test Requirements 2153
A.6.6.1.7 SA event triggered reporting tests under DRX for UE configured with highSpeedMeasFlag-r16 2153
A.6.6.1.7.1 Test purpose and Environment 2153
A.6.6.1.7.2 Test parameters 2153
A.6.6.1.7.3 Test Requirements 2155
A.6.6.1.8 SA event triggered reporting tests without gap under DRX for UE configured with highSpeedMeasCA-Scell-r17 2156
A.6.6.1.8.1 Test purpose and Environment 2156
A.6.6.1.8.2 Test parameters 2156
A.6.6.1.8.3 Test Requirements 2158
A.6.6.2 Inter-frequency Measurements 2158
A.6.6.2.1 SA event triggered reporting tests for FR1 without SSB time index detection when DRX is not used 2158
A.6.6.2.1.1 Test Purpose and Environment 2158
A.6.6.2.1.2 Test Requirements 2161
A.6.6.2.2 SA event triggered reporting tests for FR1 without SSB time index detection when DRX is used 2161
A.6.6.2.2.1 Test Purpose and Environment 2161
A.6.6.2.2.2 Test Requirements 2164
A.6.6.2.3 Void 2165
A.6.6.2.4 Void 2165
A.6.6.2.5 SA event triggered reporting tests for FR1 with SSB time index detection when DRX is not used 2165
A.6.6.2.5.1 Test Purpose and Environment 2165
A.6.6.2.5.2 Test Requirements 2168
A.6.6.2.6 SA event triggered reporting tests for FR1 with SSB time index detection when DRX is used 2168
A.6.6.2.6.1 Test Purpose and Environment 2168
A.6.6.2.6.2 Test Requirements 2171
A.6.6.2.7 Void 2171
A.6.6.2.8 Void 2171
A.6.6.2.9 SA event triggered reporting tests with additional mandatory gap pattern 2171
A.6.6.2.9.1 Test Purpose and Environment 2171
A.6.6.2.9.2 Test Requirements 2174

A.6.6.2.10 SA event triggered reporting tests for FR1 when DRX is used....2174
A.6.6.2.10.1 Test Purpose and Environment....2174
A.6.6.2.10.2 Test Requirements....2177
A.6.6.2.12 SA event triggered reporting tests for FR1 without SSB time index detection when DRX is used for UE configured with highSpeedMeasInterFreq-r17....2180
A.6.6.2.12.1 Test Purpose and Environment....2180
A.6.6.2.12.2 Test Requirements....2183
A.6.6.3 Inter-RAT Measurements....2183
A.6.6.3.1 SA NR - E-UTRAN event-triggered reporting in non-DRX in FR1....2183
A.6.6.3.1.1 Test Purpose and Environment....2183
A.6.6.3.1.2 Test Requirements....2187
A.6.6.3.2 SA NR - E-UTRAN event-triggered reporting in DRX in FR1....2187
A.6.6.3.2.1 Test Purpose and Environment....2187
A.6.6.3.2.2 Test Requirements....2191
A.6.6.3.3 SA NR - E-UTRAN event-triggered reporting in DRX in FR1 for UE configured with highSpeedMeasFlag-r16....2191
A.6.6.3.3.1 Test Purpose and Environment....2191
A.6.6.3.3.2 Test Requirements....2195
A.6.6.4 L1-RSRP measurement for beam reporting....2195
A.6.6.4.1 SSB based L1-RSRP measurement when DRX is not used....2195
A.6.6.4.1.1 Test Purpose and Environment....2195
A.6.6.4.1.2 Test parameters....2195
A.6.6.4.1.3 Test Requirements....2197
A.6.6.4.2 SSB based L1-RSRP measurement when DRX is used....2197
A.6.6.4.2.1 Test Purpose and Environment....2197
A.6.6.4.2.2 Test parameters....2198
A.6.6.4.2.3 Test Requirements....2199
A.6.6.4.3 CSI-RS based L1-RSRP measurement when DRX is not used....2199
A.6.6.4.3.1 Test Purpose and Environment....2199
A.6.6.4.3.2 Test parameters....2200
A.6.6.4.3.3 Test Requirements....2201
A.6.6.4.4 CSI-RS based L1-RSRP measurement when DRX is used....2202
A.6.6.4.4.1 Test Purpose and Environment....2202
A.6.6.4.4.2 Test parameters....2202
A.6.6.4.4.3 Test Requirements....2204
A.6.6.4.5 SSB based L1-RSRP measurement when DRX is used for UE configured with *highSpeedMeasFlag-r16*....2204
A.6.6.4.5.1 Test Purpose and Environment....2204
A.6.6.4.5.2 Test parameters....2204
A.6.6.4.5.3 Test Requirements....2206
A.6.6.4.6 Inter-cell SSB based L1-RSRP measurements on FR1 PCell when DRX is used....2206
A.6.6.4.6.1 Test Purpose and Environment....2206
A.6.6.4.6.2 Test parameters....2207
A.6.6.4.6.3 Test Requirements....2209
A.6.6.5 Inter-RAT UTRAN FDD measurements....2209
A.6.6.5.1 SA NR - UTRAN FDD event-triggered reporting in non-DRX in FR1....2209
A.6.6.5.1.1 Test Purpose and Environment....2209
A.6.6.5.1.2 Test Requirements....2211
A.6.6.6 CLI measurements....2212
A.6.6.6.1 SRS-RSRP measurement with DRX....2212
A.6.6.6.1.1 Test Purpose and Environment....2212
A.6.6.6.1.2 Test Parameters....2212
A.6.6.6.1.3 Test Requirements....2214
A.6.6.6.2 CLI-RSSI measurement with DRX....2215
A.6.6.6.2.1 Test Purpose and Environment....2215
A.6.6.6.2.2 Test Parameters....2215
A.6.6.6.2.3 Test Requirements....2216
A.6.6.7 NR measurements with autonomous gaps....2217
A.6.6.7.1 SA intra-frequency CGI identification of NR neighbor cell in FR1....2217
A.6.6.7.1.1 Test Purpose and Environment....2217
A.6.6.7.1.2 Test Parameters....2217
A.6.6.7.1.3 Test Requirements....2219

A.6.6.7.2 Identification of a new CGI of inter-RAT E-UTRA cell using autonomous gaps in NR SA 2219
A.6.6.7.2.1 Test Purpose and Environment 2219
A.6.6.7.2.2 Test Requirements 2222
A.6.6.8 L1-SINR measurement for beam reporting 2223
A.6.6.8.2 L1-SINR measurement with SSB based CMR and dedicated IMR when DRX is not used 2225
A.6.6.8.2.1 Test Purpose and Environment 2225
A.6.6.8.2.2 Test parameters 2225
A.6.6.8.2.3 Test Requirements 2228
A.6.6.8.3 L1-SINR measurement with CSI-RS based CMR and dedicated IMR configured when DRX is not used 2228
A.6.6.8.3.1 Test Purpose and Environment 2228
A.6.6.8.3.2 Test parameters 2228
A.6.6.8.3.3 Test Requirements 2230
A.6.6.9 Idle Mode CA/DC Measurements 2231
A.6.6.9.1 SA Idle mode CA/DC measurement for FR1 2231
A.6.6.9.1.1 Test Purpose and Environment 2231
A.6.6.9.1.2 Test Requirements 2235
A.6.6.10 CSI-RS based intra-frequency Measurements 2235
A.6.6.10.1 SA event triggered reporting tests without gap under non-DRX 2235
A.6.6.10.1.1 Test purpose and Environment 2235
A.6.6.10.1.2 Test Requirements 2237
A.6.6.11 CSI-RS based inter-frequency Measurements 2237
A.6.6.11.1 SA event triggered reporting tests with gap under DRX 2237
A.6.6.11.1.1 Test Purpose and Environment 2237
A.6.6.11.1.2 Test Requirements 2240
A.6.6.12 RSTD measurements 2240
A.6.6.12.1 NR RSTD measurement reporting delay test case for single positioning frequency layer in FR1 SA 2240
A.6.6.12.1.1 Test Purpose and Environment 2240
A.6.6.12.1.2 Test Requirements 2245
A.6.6.12.2 NR RSTD measurement reporting delay test case for dual positioning frequency layers in FR1 SA 2245
A.6.6.12.2.1 Test Purpose and Environment 2245
A.6.6.12.2.2 Test Requirements 2249
A.6.6.12.3 NR RSTD measurement reporting delay test case for single positioning frequency layer with reduced number of samples in FR1 SA 2250
A.6.6.12.3.1 Test Purpose and Environment 2250
A.6.6.12.3.2 Test Requirements 2253
A.6.6.12.4 NR RSTD measurement reporting delay test case for single positioning frequency layer in FR1 SA without measurement gap 2254
A.6.6.12.4.1 Test Purpose and Environment 2254
A.6.6.12.4.2 Test Requirements 2258
A.6.6.12.5 NR RSTD measurement reporting delay test case for single positioning frequency layer in FR1 SA in RRC_CONNECTED state with Rx TEG 2258
A.6.6.12.5.1 Test Purpose and Environment 2258
A.6.6.12.5.2 Test Requirements 2262
A.6.6.13 PRS-RSRP measurements 2262
A.6.6.13.1 PRS-RSRP reporting delay test case for single positioning frequency layer 2262
A.6.6.13.1.1 Test purpose and Environment 2262
A.6.6.13.1.2 Test Requirements 2265
A.6.6.13.2 PRS-RSRP reporting delay test case for dual positioning frequency layer 2265
A.6.6.13.2.1 Test purpose and Environment 2265
A.6.6.13.2.2 Test Requirements 2268
A.6.6.13.3 PRS-RSRP reporting delay test case for reduced number of samples 2268
A.6.6.13.3.1 Test purpose and Environment 2268
A.6.6.13.3.2 Test Requirements 2270
A.6.6.13.4 PRS-RSRP reporting delay test case for single positioning frequency layer outside MG 2271
A.6.6.13.4.1 Test purpose and Environment 2271
A.6.6.14 UE Rx-Tx time difference measurements 2273
A.6.6.14.1 UE Rx-Tx time difference measurement for single positioning frequency layer in FR1 SA 2273
A.6.6.14.1.1 Test purpose and environment 2273
A.6.6.14.1.2 Test requirements 2276

A.6.6.14.2 UE Rx-Tx time difference measurement for dual positioning frequency layers in FR1 SA 2276
A.6.6.14.2.1 Test purpose and environment 2276
A.6.6.14.2.2 Test requirements 2279
A.6.6.14.3 UE Rx-Tx time difference measurement for single positioning frequency layer in FR1 SA with reduced sample number 2279
A.6.6.14.3.1 Test purpose and environment 2279
A.6.6.14.3.2 Test requirements 2281
A.6.6.14.4 UE Rx-Tx time difference measurement without gaps in FR1 SA 2281
A.6.6.14.4.1 Test purpose and environment 2281
A.6.6.14.4.2 Test requirements 2284
A.6.6.14.5 UE Rx-Tx time difference measurement for single positioning frequency layer in FR1 SA with multiple RxTx TEGs 2284
A.6.6.14.4.1 Test purpose and environment 2284
A.6.6.14.4.2 Test requirements 2286
A.6.6.15 Idle Mode measurements of inter-RAT DC candidate cells for early reporting 2287
A.6.6.15.1 Test Purpose and Environment 2287
A.6.6.15.2 Test Requirements 2291
A.6.6.16 PRS-RSRPP measurements 2292
A.6.6.16.1 PRS-RSRPP reporting delay test case for single positioning frequency layer in FR1 in RRC_CONNECTED state 2292
A.6.6.16.1.1 Test purpose and Environment 2292
A.6.6.16.1.2 Test Requirements 2294
A.6.6.16.2 PRS-RSRPP reporting delay test case with reduced number of samples for single positioning frequency layer in FR1 in RRC_CONNECTED state 2294
A.6.6.16.2.1 Test purpose and Environment 2294
A.6.6.16.2.2 Test Requirements 2296
A.6.6.16.3 PRS-RSRPP reporting delay test case for single positioning frequency layer in FR1 in RRC_CONNECTED state without measurement gap 2296
A.6.6.16.3.1 Test purpose and Environment 2296
A.6.6.16.3.2 Test Requirements 2299
A.6.6.17 SA event triggered reporting tests with Pre-MG 2299
A.6.6.17.1 SA event triggered reporting tests with autonomous activation/deactivation Pre-MG 2299
A.6.6.17.1.1 Test purpose and Environment 2299
A.6.6.17.1.2 Test parameters 2299
A.6.6.17.1.3 Test Requirements 2302
A.6.6.17.2 SA event triggered reporting tests with pre-configured measurement gaps and network-controlled activation/deactivation 2302
A.6.6.17.2.1 Test purpose and Environment 2302
A.6.6.17.2.2 Test parameters 2302
A.6.6.17.2.3 Test Requirements 2305
A.6.6.17.3 Void 2305
A.6.6.17.3.1 Void 2305
A.6.6.17.3.2 Void 2305
A.6.6.17.3.3 Void 2305
A.6.6.18 SA event triggered reporting tests with concurrent gaps 2306
A.6.6.18.1 SA event triggered reporting tests for FR1 concurrent gaps with non-overalpping scenario for SSB-based measurements in both inter-frequency layers 2306
A.6.6.18.1.1 Test Purpose and Environment 2306
A.6.6.18.1.2 Test Requirements 2308
A.6.6.18.2 SA event triggered reporting tests for FR1 concurrent gap with partially partial overalpping scenario for SSB-based measurements in both inter-frequency layers 2309
A.6.6.18.2.1 Test Purpose and Environment 2309
A.6.6.18.2.2 Test Requirements 2311
A.6.6.18.3 SA NR - E-UTRAN and NR FR1 concurrent event-triggered reporting in non-DRX in FR1 2312
A.6.6.18.3.1 Test Purpose and Environment 2312
A.6.6.18.3.2 Test Requirements 2316
A.6.6.18.4 SA event triggered reporting tests for PRS and SSB measurement in FR1 without SSB time index detection when DRX is not used 2317
A.6.6.18.4.1 Test Purpose and Environment 2317
A.6.6.18.4.2 Test Requirements 2320
A.6.6.19 SA event triggered reporting tests with NCSG 2320
A.6.6.19.1 SA event triggered reporting tests with NCSG under non-DRX in FR1 2320

A.6.6.19.1.1 Test purpose and Environment 2320
A.6.6.19.1.2 Test parameters....2320
A.6.6.19.1.3 Test Requirements....2323
A.6.6.19.2 SA event triggered reporting tests for FR1 with NCSG for inter-frequency measurement....2323
A.6.6.19.2.1 Test Purpose and Environment....2323
A.6.6.19.2.2 Test parameters....2323
A.6.6.19.2.3 Test Requirements....2326
A.6.6.19.3 SA NR - E-UTRAN event-triggered reporting in non-DRX in FR1 with NCSG....2326
A.6.6.19.3.1 Test Purpose and Environment....2326
A.6.6.19.3.2 Test parameters....2327
A.6.6.19.3.3 Test Requirements....2330
A.6.6.19.4 Event triggered reporting on SCC with deactivated SCell test with per-UE NCSG under non-DRX....2330
A.6.6.19.4.1 Test purpose and Environment....2330
A.6.6.19.4.2 Test parameters....2330
A.6.6.19.4.3 Test Requirements....2332
A.6.6.20 UE Rx-Tx time difference measurement for propagation delay compensation....2333
A.6.6.20.1 Test purpose and environment....2333
A.6.6.20.2 Test requirements....2335
A.6.6.21 UE Rx-Tx time difference measurement with TRS for RTT-based PDC in FR1 SA....2335
A.6.6.21.1 Test purpose and environment....2335
A.6.6.21.2 Test requirements....2337
A.6.7 Measurement Performance requirements....2337
A.6.7.1 SS-RSRP....2337
A.6.7.1.1 SA: intra-frequency case measurement accuracy with FR1 serving cell and FR1 target cell....2337
A.6.7.1.1.1 Test Purpose and Environment....2337
A.6.7.1.1.2 Test parameters....2338
A.6.7.1.1.3 Test Requirements....2341
A.6.7.1.2 SA inter-frequency case measurement accuracy with FR1 serving cell and FR1 target cell....2341
A.6.7.1.2.1 Test Purpose and Environment....2341
A.6.7.1.2.2 Test parameters....2341
A.6.7.1.2.3 Test Requirements....2344
A.6.7.1.3 Void....2344
A.6.7.2 SS-RSRQ....2344
A.6.7.2.1 SA: Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell....2344
A.6.7.2.1.1 Test Purpose and Environment....2344
A.6.7.2.1.2 Test Parameters....2345
A.6.7.2.1.3 Test Requirements....2348
A.6.7.2.2 SA Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell....2348
A.6.7.2.2.1 Test Purpose and Environment....2348
A.6.7.2.2.2 Test Parameters....2348
A.6.7.2.2.3 Test Requirements....2352
A.6.7.3 SS-SINR....2352
A.6.7.3.1 SA intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell....2352
A.6.7.3.1.1 Test Purpose and Environment....2352
A.6.7.3.1.2 Test Parameters....2353
A.6.7.3.1.3 Test Requirements....2356
A.6.7.3.2 SA Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell....2356
A.6.7.3.2.1 Test Purpose and Environment....2356
A.6.7.3.2.2 Test Parameters....2356
A.6.7.3.2.3 Test Requirements....2359
A.6.7.4 L1-RSRP measurement for beam reporting....2359
A.6.7.4.1 SSB based L1-RSRP measurement....2359
A.6.7.4.1.1 Test Purpose and Environment....2359
A.6.7.4.1.2 Test parameters....2359
A.6.7.4.1.3 Test Requirements....2362
A.6.7.4.2 CSI-RS based L1-RSRP measurement on resource set with repetition off....2362
A.6.7.4.2.1 Test Purpose and Environment....2362
A.6.7.4.2.2 Test parameters....2363
A.6.7.4.2.3 Test Requirements....2366
A.6.7.5 E-UTRAN RSRP....2366
A.6.7.5.1 SA: inter-RAT measurement accuracy with FR1 serving cell....2366

A.6.7.5.1.1 Test Purpose and Environment 2366
A.6.7.5.1.2 Test parameters 2366
A.6.7.5.1.3 Test Requirements 2369
A.6.7.6 E-UTRAN RSRQ 2369
A.6.7.6.1 SA: inter-RAT measurement accuracy with FR1 serving cell 2369
A.6.7.6.1.1 Test Purpose and Environment 2369
A.6.7.6.1.2 Test parameters 2369
A.6.7.6.1.3 Test Requirements 2373
A.6.7.7 E-UTRAN RS-SINR 2373
A.6.7.7.1 SA: inter-RAT measurement accuracy with FR1 serving cell 2373
A.6.7.7.1.1 Test Purpose and Environment 2373
A.6.7.7.1.2 Test parameters 2373
A.6.7.7.1.3 Test Requirements 2376
A.6.7.8 CLI measurements 2377
A.6.7.8.1 SA SRS-RSRP measurement accuracy with FR1 serving cell 2377
A.6.7.8.1.1 Test Purpose and Environment 2377
A.6.7.8.1.2 Test parameters 2377
A.6.7.8.1.3 Test Requirements 2380
A.6.7.8.2 SA CLI-RSSI measurement accuracy with FR1 serving cell 2380
A.6.7.8.2.1 Test Purpose and Environment 2380
A.6.7.8.2.2 Test parameters 2380
A.6.7.8.2.3 Test Requirements 2382
A.6.7.9 L1-SINR measurement for beam reporting 2383
A.6.7.9.2 L1-SINR measurement with SSB based CMR and dedicated IMR 2386
A.6.7.9.2.1 Test Purpose and Environment 2386
A.6.7.9.2.2 Test parameters 2386
A.6.7.9.2.3 Test Requirements 2390
A.6.7.9.3 L1-SINR measurement with CSI-RS based CMR and dedicated IMR 2390
A.6.7.9.3.1 Test Purpose and Environment 2390
A.6.7.9.3.2 Test parameters 2390
A.6.7.9.3.3 Test Requirements 2393
A.6.7.10 CSI-RSRP 2393
A.6.7.10.1 SA: intra-frequency case measurement accuracy with FR1 serving cell and FR1 target cell 2393
A.6.7.9.10.1 Test Purpose and Environment 2393
A.6.7.9.10.2 Test parameters 2393
A.6.7.10.1.3 Test Requirements 2397
A.6.7.10.2 SA inter-frequency case measurement accuracy with FR1 serving cell and FR1 target cell 2397
A.6.7.9.10.1 Test Purpose and Environment 2397
A.6.7.10.2.2 Test parameters 2397
A.6.7.10.2.3 Test Requirements 2401
A.6.7.11 CSI-RSRQ 2401
A.6.7.11.1 SA: Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell 2401
A.6.7.11.1.1 Test Purpose and Environment 2401
A.6.7.11.1.2 Test Parameters 2401
A.6.7.11.1.3 Test Requirements 2405
A.6.7.11.2 SA Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell 2405
A.6.7.11.2.1 Test Purpose and Environment 2405
A.6.7.11.2.2 Test Parameters 2405
A.6.7.11.2.3 Test Requirements 2409
A.6.7.12 CSI-SINR 2410
A.6.7.12.1 SA intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell 2410
A.6.7.12.1.1 Test Purpose and Environment 2410
A.6.7.12.1.2 Test Parameters 2410
A.6.7.12.1.3 Test Requirements 2413
A.6.7.12.2 SA Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell 2413
A.6.7.12.2.1 Test Purpose and Environment 2413
A.6.7.12.2.2 Test Parameters 2413
A.6.7.12.2.3 Test Requirements 2418
A.6.7.13 RSTD measurements 2418
A.6.7.13.1 RSTD measurement accuracy test case for single positioning frequency layer 2418
A.6.7.13.1.1 Test purpose and Environment 2418
A.6.7.13.1.2 Test Requirements 2420

A.6.7.13.2 RSTD measurement accuracy test case for dual positioning frequency layer 2420
A.6.7.13.2.1 Test purpose and Environment 2420
A.6.7.13.2.2 Test Requirements 2422
A.6.7.13.3 RSTD measurement accuracy test case with reduced number of samples for single positioning frequency layer in FR1 in RRC_CONNECTED state 2422
A.6.7.13.3.1 Test purpose and Environment 2422
A.6.7.13.3.2 Test Requirements 2424
A.6.7.13.4 RSTD measurement accuracy test case with Rx TEG 2424
A.6.7.14 PRS-RSRP measurements 2427
A.6.7.14.1 SA: measurement accuracy with PRS in FR1 2427
A.6.7.14.1.1 Test Purpose and Environment 2427
A.6.7.14.1.2 Test parameters 2427
A.6.7.14.1.3 Test Requirements 2429
A.6.7.14.2 SA: measurement accuracy with PRS in FR1 with reduced sample number 2429
A.6.7.14.2.1 Test Purpose and Environment 2429
A.6.7.14.2.2 Test parameters 2430
A.6.7.14.2.3 Test Requirements 2433
A.6.7.14.3 Void 2433
A.6.7.14.3.1 Void 2433
A.6.7.14.3.2 Void 2433
A.6.7.14.3.3 Void 2433
A.6.7.15 UE Rx-Tx time difference measurements 2433
A.6.7.15.1 UE Rx-Tx time difference measurement accuracy for single positioning frequency layer in FR1 SA 2433
A.6.7.15.1.1 Test purpose and environment 2433
A.6.7.15.1.2 Test parameters 2434
A.6.7.15.1.3 Test requirements 2436
A.6.7.15.2 UE Rx-Tx time difference measurement accuracy with reduced number of samples in FR1 SA 2436
A.6.7.15.2.1 Test purpose and environment 2436
A.6.7.15.2.2 Test parameters 2437
A.6.7.15.2.3 Test requirements 2438
A.6.7.15.3 UE Rx-Tx time difference measurement accuracy with RxTx TEG 2438
A.6.7.15.3.1 Test purpose and environment 2438
A.6.7.15.3.2 Test parameters 2439
A.6.7.15.3.3 Test requirements 2441
A.6.7.16 PRS-RSRPP measurements 2441
A.6.7.16.1 SA: measurement accuracy with PRS in FR1 2441
A.6.7.16.1.1 Test Purpose and Environment 2441
A.6.7.16.1.2 Test parameters 2441
A.6.7.16.1.3 Test Requirements 2444
A.6.7.16.2 SA: measurement accuracy with reduced PRS samples in FR1 2445
A.6.7.16.2.1 Test Purpose and Environment 2445
A.6.7.16.2.2 Test parameters 2445
A.6.8 Measurement procedure in RRC_INACTIVE 2447
A.6.8.1 RSTD measurements 2447
A.6.8.1.1 NR RSTD measurement reporting delay test case for single positioning frequency layer in FR1 SA in RRC_INACTIVE state 2447
A.6.8.1.1.1 Test Purpose and Environment 2447
A.6.8.1.1.2 Test Requirements 2450
A.6.8.1.2 NR RSTD measurement reporting delay test case with reduced number of samples in RRC_INACTIVE, FR1 SA 2451
A.6.8.1.2.1 Test Purpose and Environment 2451
A.6.8.1.2.2 Test Requirements 2455
A.6.8.2 PRS-RSRP measurements 2455
A.6.8.2.1 PRS-RSRP reporting delay test case for single positioning frequency layer in RRC_INACTIVE 2455
A.6.8.2.1.1 Test purpose and Environment 2455
A.6.8.2.1.2 Test Requirements 2457
A.6.8.2.2 PRS-RSRP reporting delay test case with reduced number of samples in RRC_INACTIVE 2457
A.6.8.2.2.1 Test purpose and Environment 2457
A.6.8.2.2.2 Test Requirements 2460
A.6.8.3 UE Rx-Tx time difference measurements 2460
A.6.8.3.1 UE Rx-Tx time difference measurement for single positioning frequency layer in FR1 SA 2460

A.6.8.3.1.1 Test purpose and environment 2460
A.6.8.3.1.2 Test requirements 2462
A.6.8.3.2 UE Rx-Tx time difference measurement with reduced number of samples in RRC_INACTIVE, FR1 SA 2462
A.6.8.3.2.1 Test purpose and environment 2462
A.6.8.3.2.2 Test requirements 2465
A.6.8.4 PRS-RSRPP measurements 2465
A.6.8.4.1 PRS-RSRPP reporting delay test case for single positioning frequency layer in FR1 in RRC_INACTIVE state 2465
A.6.8.4.1.1 Test purpose and Environment 2465
A.6.8.4.1.2 Test Requirements 2467
A.6.8.4.2 PRS-RSRPP reporting delay test case for single positioning frequency layer in FR1 in RRC_INACTIVE state for reduced number of samples 2468
A.6.8.4.2.1 Test purpose and Environment 2468
A.6.8.4.2.2 Test Requirements 2470
A.6.9 Measurement performance requirements in RRC_INACTIVE 2470
A.6.9.1 RSTD measurements 2470
A.6.9.1.1 RSTD measurement accuracy test case for single positioning frequency layer in FR1 in RRC_INACTIVE state 2470
A.6.9.1.1.1 Test purpose and Environment 2470
A.6.9.1.1.2 Test Requirements 2472
A.6.9.1.2 RSTD measurement accuracy test case with reduced number of samples for single positioning frequency layer in FR1 in RRC_INACTIVE state 2472
A.6.9.1.2.1 Test purpose and Environment 2472
A.6.9.1.2.2 Test Requirements 2474
A.6.9.2 PRS-RSRP measurements 2474
A.6.9.2.1 SA: measurement accuracy with PRS in FR1 in RRC_INACTIVE 2474
A.6.9.2.1.1 Test Purpose and Environment 2474
A.6.9.2.1.2 Test parameters 2474
A.6.9.2.1.3 Test Requirements 2478
A.6.9.2.2 SA: measurement accuracy with PRS in FR1 with reduced number of samples in RRC_INACTIVE state 2478
A.6.9.2.2.1 Test Purpose and Environment 2478
A.6.9.2.2.2 Test parameters 2478
A.6.9.2.2.3 Test Requirements 2480
A.6.9.3 UE Rx-Tx time difference measurements 2480
A.6.9.3.1.1 UE Rx-Tx time difference measurement accuracy in FR1 SA 2480
A.6.9.3.1.1.1 Test purpose and environment 2480
A.6.9.3.1.1.2 Test parameters 2481
A.6.9.3.1.1.3 Test requirements 2482
A.6.9.3.2 UE Rx-Tx time difference measurement accuracy with reduced number of samples 2482
A.6.9.3.2.1 Test purpose and environment 2482
A.6.9.3.2.2 Test parameters 2483
A.6.9.3.2.3 Test requirements 2484
A.6.9.4 PRS-RSRPP measurements 2485
A.6.9.4.1 SA: PRS-RSRPP measurement accuracy in FR1 in RRC INACTIVE 2485
A.6.9.4.1.1 Test Purpose and Environment 2485
A.6.9.4.1.2 Test parameters 2485
A.6.9.4.1.3 Test Requirements 2488
A.6.9.4.2 SA: measurement accuracy with reduced PRS samples in FR1 in RRC INACTIVE 2488
A.6.9.4.2.1 Test Purpose and Environment 2488
A.6.9.4.2.2 Test parameters 2489
A.6.9.4.2.3 Test Requirements 2490
A.7 NR standalone tests with one or more NR cells in FR2 2491
A.7.1 SA: RRC_IDLE state mobility 2491
A.7.1.1 Cell re-selection to NR 2491
A.7.1.1.1 Cell reselection to FR2 intra-frequency NR case 2491
A.7.1.1.1.1 Test Purpose and Environment 2491
A.7.1.1.1.2 Test Parameters 2491
A.7.1.1.1.3 Test Requirements 2493
A.7.1.1.2 Cell reselection to FR2 inter-frequency NR case 2493

A.7.1.1.2.1 Test Purpose and Environment 2493
A.7.1.1.2.2 Test Parameters 2494
A.7.1.1.2.3 Test Requirements 2496
A.7.1.1.3 Cell reselection to FR2 intra-frequency NR case for UE fulfilling low mobility relaxed measurement criterion 2496
A.7.1.1.3.1 Test Purpose and Environment 2496
A.7.1.1.3.2 Test Parameters 2496
A.7.1.1.3.3 Test Requirements 2498
A.7.1.1.4 Cell reselection to FR2 intra-frequency NR case for UE fulfilling not-at-cell edge relaxed measurement criterion 2499
A.7.1.1.4.1 Test Purpose and Environment 2499
A.7.1.1.4.2 Test Parameters 2499
A.7.1.1.4.3 Test Requirements 2501
A.7.1.1.5 Cell reselection to FR2 inter-frequency NR case for UE fulfilling low mobility relaxed measurement criterion 2501
A.7.1.1.5.1 Test Purpose and Environment 2501
A.7.1.1.5.2 Test Parameters 2501
A.7.1.1.5.3 Test Requirements 2503
A.7.1.1.6 Cell reselection to FR2 inter-frequency NR case for UE fulfilling not-at-cell edge relaxed measurement criterion 2504
A.7.1.1.6.1 Test Purpose and Environment 2504
A.7.1.1.6.2 Test Parameters 2504
A.7.1.1.6.3 Test Requirements 2506
A.7.1.1.7 Cell reselection to FR2 intra-frequency NR case for FR2 power class 6 UE configured with *highSpeedMeasFlagFR2-r17* 2507
A.7.1.1.7.1 Test Purpose and Environment 2507
A.7.1.1.7.2 Test Parameters 2507
A.7.1.1.7.3 Test Requirements 2509
A.7.2 SA: RRC_INACTIVE state mobility 2510
A.7.2.1 Small Data Transmission 2510
A.7.2.1.1 TA validation for CG-SDT in FR2 2510
A.7.2.1.1.1 Test Purpose and Environment 2510
A.7.2.1.1.2 Test Requirements 2512
A.7.3 RRC_CONNECTED state mobility 2512
A.7.3.1 Handover 2512
A.7.3.1.1 Inter-frequency handover from FR1 to FR2; unknown target cell 2512
A.7.3.1.1.1 Test Purpose and Environment 2512
A.7.3.1.1.2 Test Parameters 2513
A.7.3.1.1.3 Test Requirements 2515
A.7.3.1.2 Intra-frequency handover from FR2 to FR2; unknown target cell 2515
A.7.3.1.2.1 Test Purpose and Environment 2515
A.7.3.1.2.2 Test Parameters 2515
A.7.3.1.2.3 Test Requirements 2517
A.7.3.1.3 Inter-frequency handover from FR2 to FR2; unknown target cell 2517
A.7.3.1.3.1 Test Purpose and Environment 2517
A.7.3.1.3.2 Test Parameters 2517
A.7.3.1.3.3 Test Requirements 2519
A.7.3.1.4 Inter-band inter-frequency synchronous DAPS handover from FR1 to FR2 2519
A.7.3.1.4.1 Test Purpose and Environment 2519
A.7.3.1.4.2 Test Parameters 2519
A.7.3.1.4.3 Test Requirements 2522
A.7.3.1.5 Inter-band inter-frequency asynchronous DAPS handover from FR1 to FR2 2523
A.7.3.1.5.1 Test Purpose and Environment 2523
A.7.3.1.5.2 Test Parameters 2523
A.7.3.1.5.3 Test Requirements 2527
A.7.3.1.6 Handover with PSCell from SA to EN-DC; unknown FR2 target cell 2527
A.7.3.1.6.1 Test Purpose and Environment 2527
A.7.3.1.6.2 Test Parameters 2528
A.7.3.1.6.3 Test Requirements 2532
A.7.3.1.7 HO with PSCell from FR1 NR-SA to EN-DC with known E-UTRA PCell and known FR2 PSCell 2532
A.7.3.1.7.1 Test purpose and environment 2532

A.7.3.1.7.2 Test Requirements 2537
A.7.3.1.8 NR PSCell change delay in HO with PSCell from NR-DC to NR-DC 2537
A.7.3.1.8.1 Test Purpose and Environment 2537
A.7.3.1.8.2 Test Requirements 2541
A.7.3.1.9 Intra-frequency handover from FR2-2 to FR2-2; unknown target cell 2541
A.7.3.1.9.1 Test Purpose and Environment 2541
A.7.3.1.9.2 Test Parameters 2541
A.7.3.1.9.3 Test Requirements 2543
A.7.3.1.10 Inter-frequency handover from FR2-2 to FR2-2; unknown target cell 2543
A.7.3.1.10.1 Test Purpose and Environment 2543
A.7.3.1.10.2 Test Parameters 2543
A.7.3.1.10.3 Test Requirements 2546
A.7.3.1.11 Inter-frequency handover from FR1 to FR2-2; unknown target cell 2546
A.7.3.1.11.1 Test Purpose and Environment 2546
A.7.3.1.11.2 Test Parameters 2546
A.7.3.1.11.3 Test Requirements 2548
A.7.3.2 RRC Connection Mobility Control 2549
A.7.3.2.1 SA: RRC Re-establishment 2549
A.7.3.2.1.1 Intra-frequency RRC Re-establishment in FR2 2549
A.7.3.2.1.2 Inter-frequency RRC Re-establishment in FR2 2551
A.7.3.2.1.3 Intra-frequency RRC Re-establishment in FR2 without serving cell timing 2554
A.7.3.2.1.3.1 Test Purpose and Environment 2554
A.7.3.2.1.3.2 Test Requirements 2555
A.7.3.2.1.4 Intra-frequency RRC Re-establishment in FR2-2 2556
A.7.3.2.1.4.1 Test Purpose and Environment 2556
A.7.3.2.1.4.2 Test Requirements 2558
A.7.3.2.1.5 Inter-frequency RRC Re-establishment in FR2-2 2558
A.7.3.2.1.5.1 Test Purpose and Environment 2558
A.7.3.2.1.5.2 Test Requirements 2560
A.7.3.2.1.6 Intra-frequency RRC Re-establishment in FR2-2 without serving cell timing 2561
A.7.3.2.1.6.1 Test Purpose and Environment 2561
A.7.3.2.1.6.2 Test Requirements 2563
A.7.3.2.2 Random Access 2563
A.7.3.2.2.1 4-step RA type c ontention based random access test in FR2 for NR Standalone 2563
A.7.3.2.2.2 4-step RA type n on-contention based random access test in FR2 for NR Standalone 2567
A.7.3.2.2.3 2-step RA type contention based random access test in FR2 for NR Standalone 2570
A.7.3.2.2.4 2-step RA type n on-contention based random access test in FR2 for NR Standalone 2573
A.7.3.2.3 SA: RRC Connection Release with Redirection 2576
A.7.3.2.3.1 Redirection from NR in FR2 to NR in FR2 2576
A.7.3.3 Conditional Handover 2578
A.7.3.3.1 Intra-frequency conditional handover from FR2 to FR2 2578
A.7.3.3.1.1 Test Purpose and Environment 2578
A.7.3.3.1.2 Test Parameters 2578
A.7.3.3.1.2.3 Test Requirements 2580
A.7.3.3.2 Inter-frequency conditional handover from FR2 to FR2; unknown target cell 2580
A.7.3.3.2.1 Test Purpose and Environment 2580
A.7.3.3.2.2 Test Parameters 2580
A.7.3.3.2.3 Test Requirements 2582
A.7.4 Timing 2582
A.7.4.1 UE transmit timing 2582
A.7.4.1.1 NR UE Transmit Timing Test for FR2 2582
A.7.4.1.1.1 Test Purpose and environment 2582
A.7.4.1.1.2 Test requirements 2584
A.7.4.1.2 NR UE Transmit Timing Test for FR2-2 2585
A.7.4.1.2.1 Test Purpose and environment 2585
A.7.4.1.2.2 Test requirements 2588
A.7.4.2 UE timer accuracy 2588
A.7.4.3 Timing advance 2588
A.7.4.3.1 SA FR2 timing advance adjustment accuracy 2588
A.7.4.3.1.1 Test Purpose and Environment 2588
A.7.4.3.1.2 Test Parameters 2589
A.7.4.3.1.3 Test Requirements 2591

A.7.4.3.2 SA FR2-2 timing advance adjustment accuracy 2591
A.7.4.3.2.1 Test Purpose and Environment 2591
A.7.4.3.2.2 Test Parameters 2592
A.7.4.3.2.3 Test Requirements 2594
A.7.5 Signaling characteristics 2594
A.7.5.1 Radio link Monitoring 2594
A.7.5.1.1 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with SSB-based RLM RS in non-DRX mode 2595
A.7.5.1.1.1 Test Purpose and Environment 2595
A.7.5.1.1.2 Test Requirements 2598
A.7.5.1.2 Radio Link Monitoring In-sync Test for FR2 PCell configured with SSB-based RLM RS in non-DRX mode 2598
A.7.5.1.2.1 Test Purpose and Environment 2598
A.7.5.1.2.2 Test Requirements 2601
A.7.5.1.3 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with SSB-based RLM RS in DRX mode 2602
A.7.5.1.3.1 Test Purpose and Environment 2602
A.7.5.1.3.2 Test Requirements 2604
A.7.5.1.4 Radio Link Monitoring In-sync Test for FR2 PCell configured with SSB-based RLM RS in DRX mode 2604
A.7.5.1.4.1 Test Purpose and Environment 2604
A.7.5.1.4.2 Test Requirements 2607
A.7.5.1.5 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with CSI-RS-based RLM in non-DRX mode 2607
A.7.5.1.5.1 Test Purpose and Environment 2607
A.7.5.1.5.2 Test Requirements 2610
A.7.5.1.6 Radio Link Monitoring In-sync Test for FR2 PCell configured with CSI-RS-based RLM in non-DRX mode 2611
A.7.5.1.6.1 Test Purpose and Environment 2611
A.7.5.1.6.2 Test Requirements 2613
A.7.5.1.7 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with CSI-RS-based RLM in DRX mode 2614
A.7.5.1.7.1 Test Purpose and Environment 2614
A.7.5.1.7.2 Test Requirements 2616
A.7.5.1.8 Radio Link Monitoring In-sync Test for FR2 PCell configured with CSI-RS-based RLM in DRX mode 2617
A.7.5.1.8.1 Test Purpose and Environment 2617
A.7.5.1.8.2 Test Requirements 2620
A.7.5.1.9 UE Radio Link Monitoring Scheduling Restrictions on FR2 2620
A.7.5.1.9.1 Test Purpose and Environment 2620
A.7.5.1.9.2 Test Requirements 2622
A.7.5.2 Interruption 2622
A.7.5.2.1 Interruptions during measurements on deactivated NR SCC in FR2 2622
A.7.5.2.1.1 Test Purpose and Environment 2622
A.7.5.2.1.2 Test Requirements 2625
A.7.5.2.2 SA interruptions at NR SRS carrier-based switching 2625
A.7.5.2.2.1 Test Purpose and Environment 2625
A.7.5.2.2.2 Test Parameters 2625
A.7.5.2.2.3 Test Requirements 2627
A.7.5.3 SCell Activation and Deactivation Delay 2627
A.7.5.3.1 SCell Activation and deactivation for SCell in FR2 intra-band in non-DRX 2627
A.7.5.3.1.1 Test Purpose and Environment 2627
A.7.5.3.1.2 Test Requirements 2629
A.7.5.3.2 SCell Activation and deactivation for FR1+FR2 inter-band with target SCell in FR2 2629
A.7.5.3.2.1 Test Purpose and Environment 2629
A.7.5.3.2.2 Test Requirements 2632
A.7.5.3.3 SCell Activation and deactivation for SCell in FR2 inter-band in non-DRX 2633
A.7.5.3.3.1 Test Purpose and Environment 2633
A.7.5.3.3.2 Test Requirements 2635
A.7.5.3.4 Direct SCell activation at SCell addition of known SCell in FR2 2636
A.7.5.3.4.1 Test Purpose and Environment 2636
A.7.5.3.4.2 Test Requirements 2638

A.7.5.3.5 Direct SCell activation at handover with known SCell in FR2 2639
A.7.5.3.5.1 Test Purpose and Environment 2639
A.7.5.3.5.2 Test Requirements 2641
A.7.5.3.6 PUCCH SCell activation and deactivation for FR1+FR2 inter-band with target SCell in FR2 and known 2642
A.7.5.3.6.1 Test Purpose and Environment 2642
A.7.5.3.6.2 Test Requirements 2645
A.7.5.3.7 PUCCH SCell activation and deactivation delay requirements of FR2 unknown cell with FR1 PCell 2646
A.7.5.3.7.1 Test Purpose and Environment 2646
A.7.5.3.7.2 Test Requirements 2649
A.7.5.3.8 SCell Activation and deactivation for known PUCCH SCell in FR2 inter-band in non-DRX 2650
A.7.5.3.8.1 Test Purpose and Environment 2650
A.7.5.3.8.2 Test Requirements 2653
A.7.5.3.9 PUCCH SCell Activation and deactivation of unknown SCell in FR2 2654
A.7.5.3.9.1 Test Purpose and Environment 2654
A.7.5.3.9.2 Test Requirements 2657
A.7.5.3.10 SCell Activation and deactivation of FR2 known PUCCH SCell and one FR2 unknown SCell with FR2 PCell 2657
A.7.5.3.10.1 Test Purpose and Environment 2657
A.7.5.3.10.2 Test Requirements 2661
A.7.5.3.11 PUCCH SCell activation and deactivation delay requirements of FR2 unknown cell with FR2 PCell 2662
A.7.5.3.11.1 PUCCH SCell activation with non-PUCCH SCell in a secondary PUCCH Group 2662
A.7.5.3.11.1.1 Test Purpose and Environment 2662
A.7.5.3.11.1.2 Test Requirements 2666
A.7.5.3.11.2 PUCCH SCell activation with non-PUCCH SCell in a primary PUCCH Group 2667
A.7.5.3.11.2.1 Test Purpose and Environment 2667
A.7.5.3.11.2.2 Test Requirements 2671
A.7.5.3.12 PSCell RACH-less based Activation and deactivation for FR1+FR2 inter-band with target PSCell in FR2 2671
A.7.5.3.12.1 Test Purpose and Environment 2671
A.7.5.3.12.2 Test Requirements 2674
A.7.5.3.13 SCell Activation for SCell in FR2 intra-band in non-DRX 2675
A.7.5.3.13.1 Test Purpose and Environment 2675
A.7.5.3.13.2 Test Requirements 2676
A.7.5.3.14 SCell Activation for known SCell in FR2 inter-band 2677
A.7.5.3.14.1 Test Purpose and Environment 2677
A.7.5.3.14.2 Test Requirements 2679
A.7.5.15 PSCell RACH-less based Activation and deactivation for FR1+FR2 inter-band with target PSCell in FR2 2680
A.7.5.15.3.1 Test Purpose and Environment 2680
A.7.5.3.2.2 Test Requirements 2682
A.7.5.4 Void 2683
A.7.5.5 Beam Failure Detection and Link recovery procedures 2683
A.7.5.5.1 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with SSB-based BFD and LR in non-DRX mode 2683
A.7.5.5.1.1 Test Purpose and Environment 2683
A.7.5.5.1.2 Test Requirements 2686
A.7.5.5.2 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with SSB-based BFD and LR in DRX mode 2687
A.7.5.5.2.1 Test Purpose and Environment 2687
A.7.5.5.2.2 Test Requirements 2690
A.7.5.5.3 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with CSI-RS-based BFD and LR in non-DRX mode 2691
A.7.5.5.3.1 Test Purpose and Environment 2691
A.7.5.5.3.2 Test Requirements 2694
A.7.5.5.4 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with CSI-RS-based BFD and LR in DRX mode 2694
A.7.5.5.4.1 Test Purpose and Environment 2694
A.7.5.5.4.2 Test Requirements 2698

A.7.5.5.5 Scheduling availability restriction during Beam Failure Detection and Link Recovery for FR2 PCell configured with SSB-based BFD and LR in non-DRX mode 2698
A.7.5.5.5.1 Test Purpose and Environment 2698
A.7.5.5.5.2 Test Requirements 2702
A.7.5.5.6 Beam Failure Detection and Link Recovery Test for FR2 SCell configured with CSI-RS-based BFD and LR in non-DRX mode 2702
A.7.5.5.6.1 Test Purpose and Environment 2702
A.7.5.5.6.2 Test Requirements 2705
A.7.5.5.7 Beam Failure Detection and Link Recovery Test for FR2 SCell configured with CSI-RS-based BFD and LR in DRX mode 2706
A.7.5.5.7.1 Test Purpose and Environment 2706
A.7.5.5.7.2 Test Requirements 2709
A.7.5.5.8 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with CSI-RS-based BFD and LR in DRX mode for UE fulfilling relaxed measurement criterion 2710
A.7.5.5.8.1 Test Purpose and Environment 2710
A.7.5.5.8.2 Test Requirements 2713
A.7.5.5.9 TRP specific Beam Failure Detection and Link Recovery Test for FR2 SCell configured with CSI-RS-based BFD and LR in DRX mode 2714
A.7.5.5.9.1 Test Purpose and Environment 2714
A.7.5.5.9.2 Test Requirements 2717
A.7.5.5.10 TRP specific Beam Failure Detection and Link Recovery Test for FR2 PCell configured with SSB-based BFD and LR in non-DRX mode 2718
A.7.5.5.10.1 Test Purpose and Environment 2718
A.7.5.5.10.2 Test Requirements 2721
A.7.5.5.11 Beam Failure Detection and Link Recovery Test for FR2-2 PCell configured with CSI-RS-based BFD and LR in non-DRX mode 2722
A.7.5.5.11.1 Test Purpose and Environment 2722
A.7.5.5.11.2 Test Requirements 2725
A.7.5.5.12 Beam Failure Detection and Link Recovery Test for FR2-2 PCell configured with CSI-RS-based BFD and LR in DRX mode 2725
A.7.5.5.12.1 Test Purpose and Environment 2725
A.7.5.5.12.2 Test Requirements 2728
A.7.5.5.13 Scheduling availability restriction during Beam Failure Detection and Link Recovery for FR2-2 PCell configured with SSB-based BFD and LR in non-DRX mode 2729
A.7.5.5.13.1 Test Purpose and Environment 2729
A.7.5.5.13.2 Test Requirements 2732
A.7.5.6 Active BWP switch 2732
A.7.5.6.1 DCI-based and Timer-based Active BWP Switch 2732
A.7.5.6.1.1 NR FR2- NR FR2 DL active BWP switch of SCell with non-DRX in SA 2732
A.7.5.6.1.2 NR FR1- NR FR2 DL active BWP switch of SCell with non-DRX in SA 2736
A.7.5.6.1.3 NR FR2 DL active BWP switch with non-DRX in SA 2740
A.7.5.6.1.3.1 Test Purpose and Environment 2740
A.7.5.6.1.3.2 Test Requirements 2742
A.7.5.6.1.4 NR FR2-2- NR FR2-2 DL active BWP switch of SCell with non-DRX in SA 2743
A.7.5.6.1.4.1 Test Purpose and Environment 2743
A.7.5.6.1.4.2 Test Requirements 2746
A.7.5.6.2 RRC-based Active BWP Switch 2747
A.7.5.6.2.1.1 Test Purpose and Environment 2747
A.7.5.6.2.1.2 Test Requirements 2750
A.7.5.6.2.2 NR FR2-2 DL active BWP switch of PCell with non-DRX in SA 2750
A.7.5.6.2.2.1 Test Purpose and Environment 2750
A.7.5.6.2.2.2 Test Requirements 2753
A.7.5.6.3 Simultaneous DCI-based and Timer-based Active BWP Switch on multiple CCs 2753
A.7.5.6.3.1.1 Test Purpose and Environment 2753
A.7.5.6.3.1.2 Test Requirements 2757
A.7.5.6.4 SCell dormancy switch 2757
A.7.5.6.4.1 NR FR2 PCell SCell dormancy switch of single FR2 SCell inside active time 2757
A.7.5.6.4.1.1 Test Purpose and Environment 2757
A.7.5.6.4.1.2 Test Requirements 2760
A.7.5.6.4.2 NR FR1 PCell SCell dormancy switch of two FR2 SCells outside active time 2761
A.7.5.6.4.2.1 Test Purpose and Environment 2761
A.7.5.6.4.2.2 Test Requirements 2764

A.7.5.6.5 Simultaneous RRC-based Active BWP Switch on multiple CCs 2765
A.7.5.6.5.1 Active BWP switch on multiple SCells with non-DRX in SA 2765
A.7.5.6.5.2 NR FR2-2 Active BWP switch on multiple SCells with non-DRX in SA 2768
A.7.5.6.5.2.1 Test Purpose and Environment 2768
A.7.5.6.5.2.2 Test Requirements 2771
A.7.5.7 PSCell addition and release delay 2771
A.7.5.7.1 Addition and Release Delay of known NR PSCell in FR2-2 2771
A.7.5.7.1.1 Test Purpose and Environment 2771
A.7.5.7.1.2 Test Requirements 2773
A.7.5.7.2 Addition and Release Delay of unknown NR PSCell in FR2-2 2774
A.7.5.7.2.1 Test Purpose and Environment 2774
A.7.5.7.2.2 Test Requirements 2776
A.7.5.8 Active TCI state switch delay 2776
A.7.5.8.1 MAC-CE based active TCI state switch 2776
A.7.5.8.2 RRC based active TCI state switch 2780
A.7.5.8.3 MAC-CE based active TCI state switch for HST FR2 scenario 2784
A.7.5.8.3.1 NR PCell FR2 HST active TCI state switch for a known TCI state 2784
A.7.5.8.3.1.1 Test Purpose and Environment 2784
A.7.5.8.3.1.2 Test Requirements 2788
A.7.5.9 Uplink spatial relation switch delay 2789
A.7.5.9.1.1.1 Test Purpose and Environment 2789
A.7.5.9.1.1.2 Test Requirements 2791
A.7.5.9.2 RRC based spatial relation switch 2791
A.7.5.9.2.1 NR PCell FR2 spatial relation switch associated with a known DL-RS 2791
A.7.5.9.2.1.1 Test Purpose and Environment 2791
A.7.5.9.2.1.2 Test Requirements 2794
A.7.5.10 UE specific CBW change 2794
A.7.5.10.1 NR FR2 UE specific CBW change of PCell with non-DRX in SA 2794
A.7.5.10.1.1 Test Purpose and Environment 2794
A.7.5.10.1.2 Test Requirements 2797
A.7.5.11 UE UL carrier RRC reconfiguration Delay 2797
A.7.5.11.1 UE UL carrier RRC reconfiguration Delay 2797
A.7.5.11.1.1 Test Purpose and Environment 2797
A.7.5.11.1.2 Test Requirements 2799
A.7.5.12 Conditional PSCell addition and release delay (FR2 SA) 2799
A.7.5.12.1 Addition and Release Delay of PSCell 2799
A.7.5.12.1.1 Test purpose and environment 2799
A.7.5.12.1.2 Test Parameters 2800
A.7.5.12.1.3 Test Requirements 2802
A.7.5.13 Unified TCI state switching delay 2802
A.7.5.13.1 MAC-CE based active joint TCI state switching 2802
A.7.5.13.1.1 NR PCell FR2 active joint TCI state switch for a known TCI state 2802
A.7.5.13.1.1.1 Test Purpose and Environment 2802
A.7.5.13.1.1.2 Test parameters 2803
A.7.5.13.1.1.3 Test Requirements 2805
A.7.5.13.2 MAC-CE based active uplink TCI state switch 2805
A.7.5.13.2.1 NR FR2 PCell uplink TCI state switch for a known TCI state 2805
A.7.5.13.2.1.1 Test Purpose and Environment 2805
A.7.5.13.2.1.2 Test parameters 2806
A.7.5.13.2.1.3 Test Requirements 2808
A.7.5.13.3 MAC-CE based active downlink TCI state switch 2808
A.7.5.13.3.1 NR PCell FR2 active downlink TCI state switch to cell with additional PCI for a known TCI state 2808
A.7.5.13.3.1.1 Test Purpose and Environment 2808
A.7.5.13.3.1.2 Test Parameters 2808
A.7.5.13.3.1.3 Test Requirements 2812
A.7.6 Measurement procedure 2812
A.7.6.1 Intra-frequency Measurements 2812
A.7.6.1.1 SA event triggered reporting test without gap under non-DRX 2812
A.7.6.1.1.1 Test purpose and Environment 2812
A.7.6.1.1.2 Test Requirements 2815
A.7.6.1.2 SA event triggered reporting test without gap under DRX 2815

A.7.6.1.2.1 Test purpose and Environment 2815
A.7.6.1.2.2 Test Requirements 2818
A.7.6.1.3 SA event triggered reporting test with per-UE gaps under non-DRX 2818
A.7.6.1.3.1 Test purpose and Environment 2818
A.7.6.1.3.2 Test Requirements 2821
A.7.6.1.4 SA event triggered reporting test with per-UE gaps under DRX 2821
A.7.6.1.4.1 Test purpose and Environment 2821
A.7.6.1.4.2 Test Requirements 2824
A.7.6.1.5 SA event triggered reporting test without gap under non-DRX for UE configured with *highSpeedMeasCA-Scell-r17* 2824
A.7.6.1.5.1 Test purpose and Environment 2824
A.7.6.1.5.2 Test Requirements 2827
A.7.6.1.6 SA event triggered reporting test without gap under non-DRX for FR2-2 2827
A.7.6.1.6.1 Test purpose and Environment 2827
A.7.6.1.6.2 Test Requirements 2829
A.7.6.1.7 SA event triggered reporting test without gap under DRX for FR2-2 2830
A.7.6.1.7.1 Test purpose and Environment 2830
A.7.6.1.7.2 Test Requirements 2833
A.7.6.1.8 SA event triggered reporting test with per-UE gaps under non-DRX for FR2-2 2834
A.7.6.1.8.1 Test purpose and Environment 2834
A.7.6.1.8.2 Test Requirements 2837
A.7.6.1.9 SA event triggered reporting test with per-UE gaps under DRX for FR2-2 2837
A.7.6.1.9.1 Test purpose and Environment 2837
A.7.6.1.9.2 Test Requirements 2840
A.7.6.1.10 SA event triggered reporting test with SSB time index detection without gap under non-DRX for FR2-2 2840
A.7.6.1.10.1 Test purpose and Environment 2840
A.7.6.1.10.2 Test Requirements 2843
A.7.6.1.11 SA event triggered reporting test with SSB time index detection with per-UE gaps under non-DRX for FR2-2 2843
A.7.6.1.11.1 Test purpose and Environment 2843
A.7.6.1.11.2 Test Requirements 2846
A.7.6.2 Inter-frequency Measurements 2846
A.7.6.2.1 SA event triggered reporting tests for FR2 without SSB time index detection when DRX is not used (PCell in FR2) 2846
A.7.6.2.1.1 Test Purpose and Environment 2846
A.7.6.2.1.2 Test Requirements 2849
A.7.6.2.2 SA event triggered reporting tests for FR2 without SSB time index detection when DRX is used (Pcell in FR2) 2849
A.7.6.2.2.1 Test Purpose and Environment 2849
A.7.6.2.2.2 Test Requirements 2852
A.7.6.2.3 SA event triggered reporting tests for FR2 with SSB time index detection when DRX is not used (PCell in FR2) 2852
A.7.6.2.3.1 Test Purpose and Environment 2852
A.7.6.2.3.2 Test Requirements 2854
A.7.6.2.4 SA event triggered reporting tests for FR2 with SSB time index detection when DRX is used (Pcell in FR2) 2855
A.7.6.2.4.1 Test Purpose and Environment 2855
A.7.6.2.4.2 Test Requirements 2857
A.7.6.2.5 SA event triggered reporting tests for FR2 without SSB time index detection when DRX is not used (PCell in FR1) 2857
A.7.6.2.5.1 Test Purpose and Environment 2857
A.7.6.2.5.2 Test Requirements 2860
A.7.6.2.6 SA event triggered reporting tests for FR2 without SSB time index detection when DRX is used (Pcell in FR1) 2861
A.7.6.2.6.1 Test Purpose and Environment 2861
A.7.6.2.6.2 Test Requirements 2864
A.7.6.2.7 SA event triggered reporting tests for FR2 with SSB time index detection when DRX is not used (PCell in FR1) 2864
A.7.6.2.7.1 Test Purpose and Environment 2864
A.7.6.2.7.2 Test Requirements 2867

A.7.6.2.8 SA event triggered reporting tests for FR2 with SSB time index detection when DRX is used (PCell in FR1) 2868
A.7.6.2.8.1 Test Purpose and Environment 2868
A.7.6.2.8.2 Test Requirements 2871
A.7.6.2.9 SA event triggered reporting tests For FR2 without SSB time index detection when DRX is not used (PCell in FR2) (rel16 additional mandatory gap pattern 17) 2871
A.7.6.2.9.1 Test Purpose and Environment 2871
A.7.6.2.9.2 Test Requirements 2874
A.7.6.2.10 SA event triggered reporting test without gap under non-DRX 2874
A.7.6.2.10.1 Test Purpose and Environment 2874
A.7.6.2.10.2 Test Requirements 2876
A.7.6.2.11 SA event triggered reporting test without gap under DRX 2876
A.7.6.2.11.1 Test Purpose and Environment 2876
A.7.6.2.11.2 Test Requirements 2879
A.7.6.2.12 SA event triggered reporting tests for FR2-2 without SSB time index detection when DRX is not used (PCell in FR2-2) 2879
A.7.6.2.12.1 Test Purpose and Environment 2879
A.7.6.2.12.2 Test Requirements 2882
A.7.6.2.13 SA event triggered reporting tests for FR2-2 without SSB time index detection when DRX is used (PCell in FR2-2) 2882
A.7.6.2.13.1 Test Purpose and Environment 2882
A.7.6.2.13.2 Test Requirements 2885
A.7.6.2.14 SA event triggered reporting tests for FR2-2 with SSB time index detection when DRX is not used (PCell in FR2-2) 2886
A.7.6.2.14.1 Test Purpose and Environment 2886
A.7.6.2.14.2 Test Requirements 2889
A.7.6.2.15 SA event triggered reporting tests for FR2-2 with SSB time index detection when DRX is used (PCell in FR2-2) 2889
A.7.6.2.15.1 Test Purpose and Environment 2889
A.7.6.2.15.2 Test Requirements 2892
A.7.6.2.16 SA event triggered reporting tests for FR2-2 without SSB time index detection when DRX is not used (PCell in FR1) 2893
A.7.6.2.16.1 Test Purpose and Environment 2893
A.7.6.2.16.2 Test Requirements 2897
A.7.6.2.17 SA event triggered reporting tests for FR2-2 without SSB time index detection when DRX is used (PCell in FR1) 2898
A.7.6.2.17.1 Test Purpose and Environment 2898
A.7.6.2.17.2 Test Requirements 2902
A.7.6.2.18 SA event triggered reporting tests for FR2-2 with SSB time index detection when DRX is not used (PCell in FR1) 2903
A.7.6.2.18.1 Test Purpose and Environment 2903
A.7.6.2.18.2 Test Requirements 2907
A.7.6.2.19 SA event triggered reporting tests for FR2-2 with SSB time index detection when DRX is used (PCell in FR1) 2908
A.7.6.2.19.1 Test Purpose and Environment 2908
A.7.6.2.19.2 Test Requirements 2912
A.7.6.3 L1-RSRP measurement for beam reporting 2913
A.7.6.3.1 SSB based L1-RSRP measurement when DRX is not used 2913
A.7.6.3.1 SSB based L1-RSRP measurement when DRX is not used 2913
A.7.6.3.1.1 Test Purpose and Environment 2913
A.7.6.3.1.2 Test parameters 2913
A.7.6.3.1.3 Test Requirements 2915
A.7.6.3.2 SSB based L1-RSRP measurement when DRX is used 2915
A.7.6.3.2.1 Test Purpose and Environment 2915
A.7.6.3.2.2 Test parameters 2916
A.7.6.3.2.3 Test Requirements 2917
A.7.6.3.3 CSI-RS based L1-RSRP measurement when DRX is not used 2918
A.7.6.3.3.1 Test Purpose and Environment 2918
A.7.6.3.3.2 Test parameters 2918
A.7.6.3.3.3 Test Requirements 2919
A.7.6.3.4 CSI-RS based L1-RSRP measurement when DRX is used 2920
A.7.6.3.4.1 Test Purpose and Environment 2920

A.7.6.3.4.2 Test parameters 2920
A.7.6.3.3.3 Test Requirements 2922
A.7.6.3.5 SSB based L1-RSRP measurement when DRX is used for power class 6 UE configured with *highSpeedMeasFlagFR2-r17* 2922
A.7.6.3.5.1 Test Purpose and Environment 2922
A.7.6.3.5.2 Test parameters 2923
A.7.6.3.5.3 Test Requirements 2924
A.7.6.3.6 Inter-cell SSB based L1-RSRP measurements on FR2 SCell when DRX is not used 2925
A.7.6.3.6.1 Test Purpose and Environment 2925
A.7.6.3.6.2 Test parameters 2925
A.7.6.3.6.3 Test Requirements 2928
A.7.6.3.7 SSB based L1-RSRP measurement for FR2-2 when DRX is used 2928
A.7.6.3.7.1 Test Purpose and Environment 2928
A.7.6.3.7.2 Test parameters 2929
A.7.6.3.7.3 Test Requirements 2931
A.7.6.4 CLI measurements 2931
A.7.6.4.1 SRS-RSRP measurement with non-DRX 2931
A.7.6.4.1.1 Test Purpose and Environment 2931
A.7.6.4.1.2 Test Parameters 2931
A.7.6.4.1.3 Test Requirements 2933
A.7.6.4.2 CLI-RSSI measurement with non-DRX 2933
A.7.6.4.2.1 Test Purpose and Environment 2933
A.7.6.4.2.2 Test Parameters 2934
A.7.6.4.2.3 Test Requirements 2935
A.7.6.5.1 SA interfrequency CGI reporting in autonomous gaps test (PCell in FR2) 2936
A.7.6.5.1.1 Test Purpose and Environment 2936
A.7.6.5.1.2 Test Requirements 2938
A.7.6.6 L1-SINR measurement for beam reporting 2939
A.7.6.6.2 L1-SINR measurement with SSB based CMR and dedicated IMR when DRX is used 2941
A.7.6.6.2.1 Test Purpose and Environment 2941
A.7.6.6.2.2 Test parameters 2941
A.7.6.6.2.3 Test Requirements 2943
A.7.6.6.3 L1-SINR measurement with CSI-RS based CMR and dedicated IMR configured when DRX is used 2943
A.7.6.6.3.1 Test Purpose and Environment 2943
A.7.6.6.3.2 Test parameters 2943
A.7.6.6.3.3 Test Requirements 2945
A.7.6.7 CSI-RS based intra-frequency Measurements 2945
A.7.6.7.1 SA event triggered reporting test without gap under DRX for CSI-RS based intra-frequency measurement 2945
A.7.6.7.1.1 Test purpose and Environment 2945
A.7.6.7.1.2 Test Requirements 2947
A.7.6.8 CSI-RS based inter-frequency Measurements 2948
A.7.6.8.1 SA event triggered reporting tests for FR2 CSI-RS based measurement when non-DRX is used (PCell in FR2) 2948
A.7.6.8.1.1 Test Purpose and Environment 2948
A.7.6.8.1.2 Test Requirements 2950
A.7.6.9 RSTD measurements 2951
A.7.6.9.1 NR RSTD measurement reporting delay test case for single positioning frequency layer in FR2 SA 2951
A.7.6.9.1.1 Test Purpose and Environment 2951
A.7.6.9.1.2 Test Requirements 2955
A.7.6.9.2 NR RSTD measurement reporting delay test case for dual positioning frequency layers in FR2 SA 2955
A.7.6.9.2.1 Test Purpose and Environment 2955
A.7.6.9.2.2 Test Requirements 2959
A.7.6.9.3 NR RSTD measurement reporting delay test case for single positioning frequency layer with reduced number of samples in FR2 SA 2960
A.7.6.9.3.1 Test Purpose and Environment 2960
A.7.6.9.3.2 Test Requirements 2963
A.7.6.9.4 NR RSTD measurement reporting delay test case for single positioning frequency layer in FR2 SA without measurement gap 2963

A.7.6.9.4.1 Test Purpose and Environment 2963
A.7.6.9.4.2 Test Requirements 2967
A.7.6.9.5 NR RSTD measurement reporting delay test case for single positioning frequency layer in FR2 SA in RRC_CONNECTED state with Rx TEG 2967
A.7.6.9.5.1 Test Purpose and Environment 2967
A.7.6.9.5.2 Test Requirements 2970
A.7.6.10 PRS-RSRP measurements 2971
A.7.6.10.1 PRS-RSRP reporting delay test case for single positioning frequency layer 2971
A.7.6.10.1.1 Test Purpose and Environment 2971
A.7.6.10.1.2 Test Requirements 2973
A.7.6.10.2 PRS-RSRP reporting delay test case for dual positioning frequency layer 2974
A.7.6.10.2.1 Test Purpose and Environment 2974
A.7.6.10.2.2 Test Requirements 2976
A.7.6.10.3 PRS-RSRP reporting delay test case for reduced number of samples 2976
A.7.6.10.3.1 Test Purpose and Environment 2976
A.7.6.10.3.2 Test Requirements 2979
A.7.6.10.4 PRS-RSRP reporting delay test case for single positioning frequency layer outside MG 2979
A.7.6.10.4.1 Test Purpose and Environment 2979
A.7.6.10.4.2 Test Requirements 2982
A.7.6.11 UE Rx-Tx time difference measurements 2982
A.7.6.11.1 UE Rx-Tx time difference measurements for single positioning frequency layer in FR2 SA 2982
A.7.6.11.1.1 Test purpose and environment 2982
A.7.6.11.1.2 Test requirements 2985
A.7.6.11.2 UE Rx-Tx time difference measurement period for dual positioning frequency layers in FR2 SA 2985
A.7.6.11.2.1 Test purpose and environment 2985
A.7.6.11.2.2 Test requirements 2987
A.7.6.11.3 UE Rx-Tx time difference measurements for single positioning frequency layer in FR2 SA with reduced sample number 2988
A.7.6.11.3.1 Test purpose and environment 2988
A.7.6.11.3.2 Test requirements 2990
A.7.6.11.4 UE Rx-Tx time difference measurements without gaps in FR2 SA 2990
A.7.6.11.4.1 Test purpose and environment 2990
A.7.6.11.4.2 Test requirements 2992
A.7.6.11.5 UE Rx-Tx time difference measurements for single positioning frequency layer in FR2 SA with multiple RxTx TEGs 2992
A.7.6.11.5.1 Test purpose and environment 2992
A.7.6.11.5.2 Test requirements 2994
A.7.6.12 PRS-RSRPP measurements 2995
A.7.6.12.1 PRS-RSRPP reporting delay test case for single positioning frequency layer in FR2 in RRC_CONNECTED state 2995
A.7.6.12.1.1 Test Purpose and Environment 2995
A.7.6.12.1.2 Test Requirements 2997
A.7.6.12.2 PRS-RSRPP reporting delay test case for single positioning frequency layer in FR2 in RRC_CONNECTED state 2997
A.7.6.12.2.1 Test Purpose and Environment 2997
A.7.6.12.2.2 Test Requirements 3000
A.7.6.12.3 PRS-RSRPP reporting delay test case for gapless measurement in FR2 3000
A.7.6.12.3.1 Test Purpose and Environment 3000
A.7.6.12.3.2 Test Requirements 3003
A.7.6.13 UE Rx-Tx time difference measurements for PDC 3003
A.7.6.13.1 UE Rx-Tx time difference measurement for propagation delay compensation using PRS in FR2 3003
A.7.6.13.1.1 Test purpose and environment13 3003
A.7.6.13.1.2 Test requirements 3005
A.7.6.13.2 UE Rx-Tx time difference measurement for propagation delay compensation using TRS in FR2 3005
A.7.6.13.2.1 Test purpose and environment 3005
A.7.6.13.2.2 Test requirements 3007
A.7.6.14 SA event triggered reporting tests with Pre-MG 3007
A.7.6.14.1 Intra-frequency measurement test with SA event triggered reporting tests: with autonomous activation/deactivation of Pre-MG in FR2 3007
A.7.6.14.1.1 Test purpose and Environment 3007
A.7.6.14.1.2 Test parameters 3007
A.7.6.14.1.3 Test Requirements 3009

A.7.6.14.2 Intra-frequency measurement test with SA event triggered reporting tests: with network-controlled activation/deactivation of Pre-MG in FR2 3010
A.7.6.14.2.1 Test purpose and Environment 3010
A.7.6.14.2.2 Test parameters 3010
A.7.6.14.2.3 Test Requirements 3012
A.7.6.15 SA event triggered reporting tests with concurrent gaps 3013
A.7.6.15.1 SA event triggered reporting tests For FR2 with fully non-overlapping concurrent MGs for SSB-based inter-frequency measurements 3013
A.7.6.15.1.1 Test Purpose and Environment 3013
A.7.6.15.1.2 Test Requirements 3015
A.7.6.15.2 SA event triggered reporting tests For FR2 with concurrent measurement gaps without SSB time index detection when DRX is not used (PCell in FR2) 3015
A.7.6.15.2.1 Test Purpose and Environment 3015
A.7.6.15.2.2 Test Requirements 3018
A.7.6.15.3 SA event triggered reporting tests for FR2 concurrent gap with partially partial overalpping scenario for SSB-based measurements and PRS-based measurement 3018
A.7.6.15.3.1 Test Purpose and Environment 3018
A.7.6.15.3.2 Test Requirements 3021
A.7.6.16 SA event triggered reporting tests with NCSG 3021
A.7.6.16.1 SA event triggered reporting test with per-UE NCSG under non-DRX 3021
A.7.6.16.1.1 Test purpose and Environment 3021
A.7.6.16.1.2 Test Requirements 3024
A.7.6.16.2 SA event triggered reporting tests on inter-frequency measurement with NCSG for FR2 when DRX is not used (PCell in FR2) 3024
A.7.6.16.2.1 Test Purpose and Environment 3024
A.7.6.16.2.2 Test Requirements 3027
A.7.6.16.3 Event triggered reporting test on deactivated Scell measurement via NCSG in FR2 in non-DRX 3027
A.7.6.16.3.1 Test Purpose and Environment 3027
A.7.6.16.3.2 Test Requirements 3029
A.7.7 Measurement Performance requirements 3030
A.7.7.1 SS-RSRP 3030
A.7.7.1.1 SA intra-frequency case measurement accuracy with FR2 serving cell and FR2 target cell 3030
A.7.7.1.1.1 Test Purpose and Environment 3030
A.7.7.1.1.2 Test parameters 3030
A.7.7.1.1.3 Test Requirements 3033
A.7.7.1.2 SA inter-frequency case measurement accuracy with FR2 serving cell and FR2 target cell 3033
A.7.7.1.2.1 Test Purpose and Environment 3033
A.7.7.1.2.2 Test parameters 3034
A.7.7.1.2.3 Test Requirements 3036
A.7.7.1.3 SA inter-frequency measurement accuracy with FR1 serving cell and FR2 target cell 3037
A.7.7.1.3.1 Test Purpose and Environment 3037
A.7.7.1.3.2 Test parameters 3037
A.7.7.1.3.3 Test Requirements 3039
A.7.7.2 SS-RSRQ 3040
A.7.7.2.1 SA intra-frequency measurement accuracy with FR2 serving cell and FR2 target cell 3040
A.7.7.2.1.1 Test Purpose and Environment 3040
A.7.7.2.1.2 Test Parameters 3040
A.7.7.2.1.3 Test Requirements 3042
A.7.7.2.2 SA Inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell 3042
A.7.7.2.2.1 Test Purpose and Environment 3042
A.7.7.2.2.2 Test Parameters 3042
A.7.7.2.2.3 Test Requirements 3044
A.7.7.3 SS-SINR 3044
A.7.7.3.1 SA intra-frequency case measurement accuracy with FR2 serving cell and FR2 target cell 3044
A.7.7.3.1.1 Test Purpose and Environment 3044
A.7.7.3.1.2 Test Parameters 3044
A.7.7.3.1.3 Test Requirements 3045
A.7.7.3.2 SA Inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell 3046
A.7.7.3.2.1 Test Purpose and Environment 3046
A.7.7.3.2.2 Test Parameters 3046
A.7.7.3.2.3 Test Requirements 3047
A.7.7.4 L1-RSRP measurement for beam reporting 3048

A.7.7.4.1 SSB based L1-RSRP measurement 3048
A.7.7.4.1.1 Test Purpose and Environment 3048
A.7.7.4.1.2 Test parameters 3048
A.7.7.4.1.3 Test Requirements 3049
A.7.7.4.2 CSI-RS based L1-RSRP measurement on resource set with repetition off 3050
A.7.7.4.2.1 Test Purpose and Environment 3050
A.7.7.4.2.2 Test parameters 3050
A.7.7.4.2.3 Test Requirements 3052
A.7.7.5 CLI measurements 3053
A.7.7.5.1 SA SRS-RSRP measurement accuracy with FR2 serving cell 3053
A.7.7.5.1.1 Test Purpose and Environment 3053
A.7.7.5.1.2 Test parameters 3053
A.7.7.5.1.3 Test Requirements 3055
A.7.7.5.2 SA CLI-RSSI measurement accuracy with FR2 serving cell 3055
A.7.7.5.2.1 Test Purpose and Environment 3055
A.7.7.5.2.2 Test parameters 3056
A.7.7.5.2.3 Test Requirements 3058
A.7.7.6 L1-SINR measurement for beam reporting 3058
A.7.7.6.1.1 Test Purpose and Environment 3058
A.7.7.6.1.2 Test parameters 3058
A.7.7.6.1.3 Test Requirements 3060
A.7.7.6.2 L1-SINR measurement with SSB based CMR and dedicated IMR 3061
A.7.7.6.2.1 Test Purpose and Environment 3061
A.7.7.6.2.2 Test parameters 3061
A.7.7.6.2.3 Test Requirements 3062
A.7.7.6.3 L1-SINR measurement with CSI-RS based CMR and dedicated IMR 3063
A.7.7.6.3.1 Test Purpose and Environment 3063
A.7.7.6.3.2 Test parameters 3063
A.7.7.6.3.3 Test Requirements 3065
A.7.7.7 CSI-RSRP 3066
A.7.7.7.1 SA intra-frequency case measurement accuracy with FR2 serving cell and FR2 target cell 3066
A.7.7.7.1.1 Test Purpose and Environment 3066
A.7.7.7.1.2 Test parameters 3066
A.7.7.7.1.3 Test Requirements 3068
A.7.7.7.2 SA inter-frequency case measurement accuracy with FR2 serving cell and FR2 target cell 3069
A.7.7.7.2.1 Test Purpose and Environment 3069
A.7.7.7.2.2 Test parameters 3069
A.7.7.7.2.3 Test Requirements 3071
A.7.7.8 CSI-RSRQ 3072
A.7.7.8.1 SA intra-frequency measurement accuracy with FR2 serving cell and FR2 target cell 3072
A.7.7.8.1.1 Test Purpose and Environment 3072
A.7.7.8.1.2 Test Parameters 3072
A.7.7.8.1.3 Test Requirements 3074
A.7.7.8.2 SA Inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell 3074
A.7.7.8.2.1 Test Purpose and Environment 3074
A.7.7.8.2.2 Test Parameters 3074
A.7.7.8.2.3 Test Requirements 3075
A.7.7.9 CSI-SINR 3075
A.7.7.9.1 SA intra-frequency case measurement accuracy with FR2 serving cell and FR2 target cell 3075
A.7.7.9.1.1 Test Purpose and Environment 3075
A.7.7.9.1.2 Test Parameters 3076
A.7.7.9.1.3 Test Requirements 3077
A.7.7.9.2 SA Inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell 3078
A.7.7.9.2.1 Test Purpose and Environment 3078
A.7.7.9.2.2 Test Parameters 3078
A.7.7.9.2.3 Test Requirements 3079
A.7.7.10 RSTD measurements 3080
A.7.7.10.1 RSTD measurement accuracy test case for single positioning frequency layer 3080
A.7.7.10.1.1 Test purpose and Environment 3080
A.7.7.10.1.2 Test Requirements 3082
A.7.7.10.2 RSTD measurement accuracy test case for dual positioning frequency layer 3082
A.7.7.10.2.1 Test purpose and Environment 3082

A.7.7.10.2.2 Test Requirements 3084
A.7.7.10.3 RSTD measurement accuracy test case with reduced number of samples for single positioning frequency layer in FR2 in RRC_CONNECTED state 3084
A.7.7.10.3.1 Test purpose and Environment 3084
A.7.7.10.3.2 Test Requirements 3086
A.7.7.10.4 RSTD measurement accuracy test case with Rx TEG 3086
A.7.7.10.4.1 Test purpose and Environment 3086
A.7.7.10.4.2 Test Requirements 3088
A.7.7.11 PRS-RSRP measurements 3088
A.7.7.11.1 SA measurement accuracy with PRS in FR2 3088
A.7.7.11.1.1 Test Purpose and Environment 3088
A.7.7.11.1.2 Test parameters 3088
A.7.7.11.1.3 Test Requirements 3090
A.7.7.11.2 SA measurement accuracy with PRS in FR2 with reduced sample number 3091
A.7.7.11.2.1 Test Purpose and Environment 3091
A.7.7.11.2.2 Test parameters 3091
A.7.7.11.2.3 Test Requirements 3092
A.7.7.12 UE Rx-Tx time difference measurements 3093
A.7.7.12.1 UE Rx-Tx time difference measurement accuracy for single positioning frequency layer in FR2 SA 3093
A.7.7.12.1.1 Test purpose and environment 3093
A.7.7.12.1.2 Test parameters 3093
A.7.7.12.1.3 Test requirements 3095
A.7.7.12.2 UE Rx-Tx time difference measurement accuracy with reduced number of samples in FR2 SA 3095
A.7.7.12.2.1 Test purpose and environment 3095
A.7.7.12.2.2 Test parameters 3096
A.7.7.12.2.3 Test requirements 3097
A.7.7.12.3 UE Rx-Tx time difference measurement accuracy with RxTx TEG 3097
A.7.7.12.3.1 Test purpose and environment 3097
A.7.7.12.3.2 Test parameters 3098
A.7.7.12.3.3 Test requirements 3099
A.7.7.13 PRS-RSRPP measurements 3100
A.7.7.13.1 SA measurement accuracy with PRS in FR2 3100
A.7.7.13.1.1 Test Purpose and Environment 3100
A.7.7.13.1.2 Test parameters 3100
A.7.7.13.1.3 Test Requirements 3102
A.7.7.13.2 SA measurement accuracy with reduced PRS samples in FR2 3102
A.7.7.13.2.1 Test Purpose and Environment 3102
A.7.7.13.2.2 Test parameters 3102
A.7.7.13.2.3 Test Requirements 3104
A.7.8 Measurement procedure in RRC_INACTIVE 3104
A.7.8.1 RSTD measurements 3104
A.7.8.1.1 NR RSTD measurement reporting delay test case for single positioning frequency layer in FR2 SA in RRC_INACTIVE state 3104
A.7.8.1.1.1 Test Purpose and Environment 3104
A.7.8.1.1.2 Test Requirements 3107
A.7.8.1.2 NR RSTD measurement reporting delay test case with reduced number of samples in RRC_INACTIVE, FR1 SA 3108
A.7.8.1.2.1 Test Purpose and Environment 3108
A.7.8.1.2.2 Test Requirements 3111
A.7.8.2 PRS-RSRP measurements 3112
A.7.8.2.1 PRS-RSRP reporting delay test case for single positioning frequency layer in RRC_INACTIVE 3112
A.7.8.2.1.1 Test Purpose and Environment 3112
A.7.8.2.1.2 Test Requirements 3114
A.7.8.2.2 PRS-RSRP reporting delay test case with reduced number of samples in RRC_INACTIVE 3114
A.7.8.2.2.1 Test purpose and Environment 3114
A.7.8.2.2.2 Test Requirements 3117
A.7.8.3 UE Rx-Tx time difference measurements 3117
A.7.8.3.1 UE Rx-Tx time difference measurements for single positioning frequency layer in FR2 SA 3117
A.7.8.3.1.1 Test purpose and environment 3117
A.7.8.3.1.2 Test requirements 3119

A.7.8.3.2 UE Rx-Tx time difference measurement with reduced number of samples in RRC_INACTIVE, FR2 SA....3119
A.7.8.3.2.1 Test purpose and environment....3119
A.7.8.3.2.2 Test requirements....3121
A.7.8.4 PRS-RSRPP measurements....3122
A.7.8.4.1 PRS-RSRPP reporting delay test case for single positioning frequency layer in FR2 in RRC_INACTIVE state....3122
A.7.8.4.1.1 Test Purpose and Environment....3122
A.7.8.4.1.2 Test Requirements....3124
A.7.8.4.2 PRS-RSRPP reporting delay test with reduced number of samples for single positioning frequency layer in FR2 in RRC_INACTIVE state....3124
A.7.8.4.2.1 Test Purpose and Environment....3124
A.7.8.4.2.2 Test Requirements....3127
A.7.9 Measurement performance requirements in RRC_INACTIVE....3127
A.7.9.1 RSTD measurements....3127
A.7.9.1.1 RSTD measurement accuracy test case for single positioning frequency layer in FR2 in RRC_INACTIVE state....3127
A.7.9.1.1.1 Test purpose and Environment....3127
A.7.9.1.1.2 Test Requirements....3129
A.7.9.1.2 RSTD measurement accuracy test case with reduced number of samples for single positioning frequency layer in FR2 in RRC_INACTIVE state....3129
A.7.9.1.2.1 Test purpose and Environment....3129
A.7.9.1.2.2 Test Requirements....3131
A.7.9.2 PRS-RSRP measurements....3131
A.7.9.2.1 SA measurement accuracy with PRS in FR2 in RRC_INACTIVE....3131
A.7.9.2.1.1 Test Purpose and Environment....3131
A.7.9.2.1.2 Test parameters....3131
A.7.9.2.1.3 Test Requirements....3133
A.7.9.2.2 PRS-RSRP measurements with reduced number of sample in RRC_INACTIVE....3133
A.7.9.2.2.1 Test Purpose and Environment....3133
A.7.9.2.2.2 Test parameters....3133
A.7.9.2.2.3 Test Requirements....3135
A.7.9.3 UE Rx-Tx time difference measurements....3136
A.7.9.3.1 UE Rx-Tx time difference measurements in RRC_INACTIVE....3136
A.7.9.3.1.1 Test purpose and environment....3136
A.7.9.3.1.2 Test parameters....3136
A.7.9.3.1.3 Test requirements....3137
A.7.9.3.2 UE Rx-Tx time difference measurement accuracy with reduced number of samples in FR2 SA....3137
A.7.9.3.2.1 Test purpose and environment....3137
A.7.9.3.2.2 Test parameters....3138
A.7.9.3.2.3 Test requirements....3139
A.7.9.4 PRS-RSRPP measurements....3139
A.7.9.4.1 SA measurement accuracy in FR2 in RRC INACTIVE....3139
A.7.9.4.1.1 Test Purpose and Environment....3139
A.7.9.4.1.2 Test parameters....3139
A.7.9.4.1.3 Test Requirements....3141
A.7.9.4.2 SA measurement accuracy with reduced PRS samples in FR2 in RRC INACTIVE....3141
A.7.9.4.2.1 Test Purpose and Environment....3141
A.7.9.4.2.2 Test parameters....3142
A.7.9.4.2.3 Test Requirements....3143
A.8 E-UTRA standalone tests for NR RRM....3144
A.8.1 Void....3144
A.8.2 RRC_IDLE state mobility....3144
A.8.2.1 Inter-RAT NR Cell re-selection....3144
A.8.2.1.1 E-UTRA Cell reselection to higher priority NR target Cell in FR1....3144
A.8.2.1.1.1 Test Purpose and Environment....3144
A.8.2.1.1.2 Test Requirements....3147
A.8.2.1.2 E-UTRA Cell reselection to lower priority NR target Cell in FR1 for UE configured with highSpeedInterRAT-NR-r16....3148
A.8.2.1.2.1 Test Purpose and Environment....3148
A.8.2.1.2.2 Test Requirements....3151

A.8.2.2 E-UTRA – NR Inter-RAT Early Measruement Reporting 3152
A.8.2.2.1 E-UTRA – NR Early Measurement Reporting for NR in FR1 3152
A.8.2.2.1.1 Test Purpose and Environment 3152
A.8.2.2.1.2 Test Requirements 3155
A.8.2.2.2 E-UTRA – NR Early Measurement Reporting for NR in FR2 3155
A.8.2.2.2.1 Test Purpose and Environment 3155
A.8.2.2.2.2 Test Requirements 3158
A.8.3 RRC_CONNECTED state mobility 3158
A.8.3.1 Handover 3158
A.8.3.1.1 E-UTRAN - NR handover in FR1 3158
A.8.3.1.1.1 Test Purpose and Environment 3158
A.8.3.1.1.2 Test Requirements 3162
A.8.4 Measurement procedure 3162
A.8.4.1 E-UTRA – NR Inter-RAT SFTD Measurement Delay 3162
A.8.4.1.1 E-UTRA – NR Inter-RAT SFTD Measurement Delay in non-DRX 3162
A.8.4.1.1.1 Test Purpose and Environment 3162
A.8.4.1.1.2 Test Requirements 3164
A.8.4.1.2 E-UTRA – NR Inter-RAT SFTD Measurement Delay in DRX 3164
A.8.4.1.2.1 Test Purpose and Environment 3164
A.8.4.1.2.2 Test Requirements 3165
A.8.4.2 E-UTRA – NR Inter-RAT Measurements 3166
A.8.4.2.1 NR Inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is not used 3166
A.8.4.2.1.1 Test Purpose and Environment 3166
A.8.4.2.1.2 Test Requirements 3169
A.8.4.2.2 NR Inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is used 3169
A.8.4.2.2.1 Test Purpose and Environment 3169
A.8.4.2.2.2 Test Requirements 3173
A.8.4.2.3 NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is not used 3173
A.8.4.2.3.1 Test Purpose and Environment 3173
A.8.4.2.3.2 Test Requirements 3177
A.8.4.2.4 NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is used 3177
A.8.4.2.4.1 Test Purpose and Environment 3177
A.8.4.2.4.2 Test Requirements 3181
A.8.4.2.5 NR Inter-RAT event triggered reporting tests for FR2 without SSB time index detection when DRX is not used 3181
A.8.4.2.5.1 Test Purpose and Environment 3181
A.8.4.2.5.2 Test Requirements 3183
A.8.4.2.6 NR Inter-RAT event triggered reporting tests for FR2 without SSB time index detection when DRX is used 3184
A.8.4.2.6.1 Test Purpose and Environment 3184
A.8.4.2.6.2 Test Requirements 3186
A.8.4.2.7 NR Inter-RAT event triggered reporting tests for FR2 with SSB time index detection when DRX is not used 3186
A.8.4.2.7.1 Test Purpose and Environment 3186
A.8.4.2.7.2 Test Requirements 3188
A.8.4.2.8 NR Inter-RAT event triggered reporting tests for FR2 with SSB time index detection when DRX is used 3189
A.8.4.2.8.1 Test Purpose and Environment 3189
A.8.4.2.8.2 Test Requirements 3191
A.8.4.2.9 NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection in DRX for UE configured with highSpeedInterRAT-NR-r16 3192
A.8.4.2.9.1 Test Purpose and Environment 3192
A.8.4.2.9.2 Test Requirements 3196
A.8.5 Measurement performance 3196
A.8.5.1 SFTD accuracy 3196
A.8.5.1.1 SFTD accuracy 3196
A.8.5.1.1.1 Test Purpose 3196
A.8.5.1.1.2 Test Environment 3196

A.8.5.1.1.3 Test Requirements 3200
A.8.5.2 E-UTRA – NR Inter-RAT Measurement Performance requirements 3201
A.8.5.2.1.1 E-UTRAN – NR inter-RAT measurements with FR1 target cell 3201
A.8.5.2.1.2 E-UTRAN – NR inter-RAT measurements with FR2 target cell 3204
A.8.5.2.1.2.1 Test Purpose and Environment 3204
A.8.5.2.1.2.2 Test Parameters 3204
A.8.5.2.1.2.3 Test Requirements 3206
A.8.5.2.2 SS-RSRQ 3206
A.8.5.2.2.1 E-UTRAN – NR inter-RAT measurements with FR1 target cell 3206
A.8.5.2.2.2 E-UTRAN – NR inter-RAT measurements with FR2 target cell 3209
A.8.5.2.2.2.1 Test Purpose and Environment 3209
A.8.5.2.2.2.2 Test Parameters 3209
A.8.5.2.2.2.3 Test Requirements 3211
A.8.5.2.3 SS-SINR 3211
A.8.5.2.3.1 E-UTRAN – NR inter-RAT measurements with FR1 target cell 3211
A.8.5.2.3.2 E-UTRAN – NR inter-RAT measurements with FR2 target cell 3214
A.8.5.2.3.2.1 Test Purpose and Environment 3214
A.8.5.2.3.2.2 Test Parameters 3214
A.8.5.2.3.2.3 Test Requirements 3215
A.9 V2X Tests 3216
A.9.1 V2X Tests in FR1 3216
A.9.1.1 Test for V2X UE Transmit Timing 3216
A.9.1.1.1 Test for GNSS as Synchronization Reference Source 3216
A.9.1.1.1.1 Test Purpose and Environment 3216
A.9.1.1.1.2 Test requirements 3216
A.9.1.1.2 Test for SyncRef UE as Synchronization Reference Source 3216
A.9.1.1.2.1 Test Purpose and Environment 3216
A.9.1.1.2.2 Test requirements 3217
A.9.1.1.3 Test for FR1 NR Cell as Synchronization Reference Source 3217
A.9.1.1.3.1 Test Purpose and Environment 3217
A.9.1.1.3.2 Test requirements 3219
A.9.1.2 Test for Initiation/Cease of S-SSB Transmission with V2X Sidelink Communication 3219
A.9.1.2.1 Test for FR1 NR Cell as synchronization reference source without gap under non-DRX 3219
A.9.1.2.1.1 Test Purpose and Environment 3219
A.9.1.2.1.2 Test Requirements 3221
A.9.1.2.2 Test for SyncRef UE as synchronization reference source 3222
A.9.1.2.2.1 Test Purpose and Environment 3222
A.9.1.2.2.2 Test Requirements 3223
A.9.1.2.3 Test for SyncRef UE as synchronization reference source when SL-DRX is used 3224
A.9.1.2.3.1 Test Purpose and Environment 3224
A.9.1.2.3.2 Test Requirements 3225
A.9.1.3 Test for V2X Synchronization Reference Selection/Reselection 3225
A.9.1.3.1 Test for GNSS configured as the highest priority 3225
A.9.1.3.1.1 Test Purpose and Environment 3225
A.9.1.3.1.2 Test Requirements 3227
A.9.1.3.2 Test for FR1 NR Cell configured as the highest priority 3228
A.9.1.3.2.1 Test Purpose and Environment 3228
A.9.1.3.2.2 Test Requirements 3230
A.9.1.3.3 Test for GNSS configured as the highest priority under SL-DRX 3231
A.9.1.3.3.1 Test Purpose and Environment 3231
A.9.1.3.3.2 Test Requirements 3232
A.9.1.3.4 Test for FR1 NR Cell configured as the highest priority under SL-DRX 3233
A.9.1.3.4.1 Test Purpose and Environment 3233
A.9.1.3.4.2 Test Requirements 3235
A.9.1.4 Test for L1 SL-RSRP Measurement 3236
A.9.1.4.1 Test for V2X UE Autonomous Resource Selection/Reselection 3236
A.9.1.4.1.1 Test Purpose and Environment 3236
A.9.1.4.1.2 Test Requirements 3238
A.9.1.4.2 Test for V2X UE Resource Pre-emption 3238
A.9.1.4.2.1 Test Purpose and Environment 3238
A.9.1.4.2.2 Test Requirements 3240

A.9.1.4.3 Test for V2X UE Resource Re-evaluation 3240
A.9.1.4.3.1 Test Purpose and Environment 3240
A.9.1.4.3.2 Test Requirements 3244
A.9.1.4.4 Test for V2X UE Autonomous Resource Selection/Reselection with Periodic Sensing 3244
A.9.1.4.4.1 Test Purpose and Environment 3244
A.9.1.4.4.2 Test Requirements 3247
A.9.1.4.5 Test for V2X UE Autonomous Resource Selection/Reselection with Contiguous Sensing 3247
A.9.1.4.5.1 Test Purpose and Environment 3247
A.9.1.4.5.2 Test Requirements 3249
A.9.1.4.6 Test for V2X UE Autonomous Resource Selection/Reselection in SL-DRX 3249
A.9.1.4.6.1 Test Purpose and Environment 3249
A.9.1.4.6.2 Test Requirements 3252
A.9.1.5 Test for Congestion Control Measurement 3252
A.9.1.5.1 Test Purpose and Environment 3252
A.9.1.5.2 Test Requirements 3255
A.9.1.6 Test for Interruption 3256
A.9.1.6.1 Test for Interruption to WAN due to V2X Sidelink Communication 3256
A.9.1.6.1.1 Test Purpose and Environment 3256
A.9.1.6.1.2 Test Requirements 3258
A.9.1.6.2 Test for interruption to WAN at transitions between active and non-active during SL-DRX in asynchronous case 3258
A.9.1.6.2.1 Test Purpose and Environment 3258
A.9.1.6.2.2 Test Requirements 3260
A.9.1.6.3 Test for Interruption at NR Sidelink Diccovery Configuration 3261
A.9.1.6.3.1 Test Purpose and Environment 3261
A.9.1.6.3.2 Test Requirements 3263
A.9.1.7 Selection / Reselection of relay UE 3264
A.9.1.7.1 Test Purpose and Environment 3264
A.9.1.7.2 Test Requirements 3268

A.10 EN-DC Tests with NR PSCell under CCA and Other NR Cells in FR1 3269
A.10.1 RRC_CONNECTED state mobility 3269
A.10.1.1 RRC connection mobility control 3269
A.10.1.1.1 Random Access 3269
A.10.1.1.1.1 4-step RA type contention-based random access for NR PSCell with CCA 3269
A.10.1.1.1.1.1 Test Purpose and Environment 3269
A.10.1.1.1.1.2 Test Requirements 3271
A.10.1.1.1.1.2.1 Random Access Preamble Transmission 3271
A.10.1.1.1.1.2.2 Random Access Response Reception 3271
A.10.1.1.1.1.2.3 No Random Access Response Reception 3272
A.10.1.1.1.1.2.4 Receiving an UL grant for msg3 retransmission 3272
A.10.1.1.1.1.2.5 Contention Resolution Timer expiry 3272
A.10.1.1.1.2 4-step RA type non-contention based random access for NR PSCell with CCA 3272
A.10.1.1.1.2.1 Test Purpose and Environment 3272
A.10.1.1.1.2.2 Test Requirements 3274
A.10.1.1.1.2.2.1 SSB-based Random Access Preamble Transmission 3274
A.10.1.1.1.2.2.2 Random Access Response Reception 3275
A.10.1.1.1.2.2.3 No Random Access Response Reception 3275
A.10.1.1.1.3 2-step RA type contention-based random access for NR PSCell with CCA 3276
A.10.1.1.1.3.1 Test Purpose and Environment 3276
A.10.1.1.1.3.2 Test Requirements 3277
A.10.1.1.1.3.2.1 MsgA Transmission 3277
A.10.1.1.1.3.2.2 MsgB Reception 3278
A.10.1.1.1.3.2.3 No MsgB Reception 3278
A.10.1.1.1.4 2-step RA type non-contention based random access for NR PSCell with CCA 3279
A.10.1.1.1.4.1 Test Purpose and Environment 3279
A.10.1.1.1.4.2 Test Requirements 3281
A.10.1.1.1.4.2.1 MsgA Transmission 3281
A.10.1.1.1.4.2.2 MsgB Reception 3281
A.10.1.1.1.4.2.3 No MsgB Reception 3282
A.10.1.2 Handover with PSCell from EN-DC to EN-DC with known target PSCell using CCA 3282
A.10.1.2.1 Test Purpose and Environment 3282

A.10.1.2.2 Test Requirements 3287
A.10.2 Timing 3288
A.10.2.1 UE transmit timing 3288
A.10.2.1.1 UE Transmit Timing Test with PSCell under DL CCA 3288
A.10.2.1.1.1 Test Purpose and environment 3288
A.10.2.1.1.2 Test requirements 3290
A.10.2.2 UE timing advance 3290
A.10.2.2.1 UE Timing Advance Adjustment Accuracy with PSCell under DL CCA 3290
A.10.2.2.1.1 Test Purpose and Environment 3290
A.10.2.2.1.2 Test Parameters 3290
A.10.2.2.1.3 Test Requirements 3293
A.10.3 Signalling characteristics 3293
A.10.3.1 Radio link monitoring 3293
A.10.3.1.1 Introduction 3293
A.10.3.1.2 Radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode 3294
A.10.3.1.2.1 Test purpose and environment 3294
A.10.3.1.2.2 Test requirements 3297
A.10.3.1.3 Radio link monitoring in-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode 3297
A.10.3.1.3.1 Test purpose and environment 3297
A.10.3.1.3.2 Test requirements 3301
A.10.3.1.4 Radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in DRX mode 3301
A.10.3.1.4.1 Test purpose and environment 3301
A.10.3.1.4.2 Test requirements 3301
A.10.3.1.5 Radio link monitoring in-sync test for PSCell configured with SSB-based RLM RS in DRX mode 3301
A.10.3.1.5.1 Test purpose and environment 3301
A.10.3.1.5.2 Test requirements 3301
A.10.3.2 Interruption 3301
A.10.3.2.1 E-UTRAN – NR interruptions during SCell operations with CCA 3301
A.10.3.2.1.1 Test Purpose and Environment 3301
A.10.3.2.1.2 Test Requirements 3304
A.10.3.3 SCell activation and deactivation delay 3304
A.10.3.3.1 SCell Activation and Deactivation of known NR SCell with NR PSCell and NR SCell under CCA, 160 ms SCell measurement cycle 3304
A.10.3.3.1.1 Test Purpose and Environment 3304
A.10.3.3.1.2 Test Requirements 3307
A.10.3.3.2 SCell Activation and Deactivation of known NR SCell with NR PSCell and NR SCell under CCA, 640 ms SCell measurement cycle 3308
A.10.3.3.2.1 Test Purpose and Environment 3308
A.10.3.3.2.2 Test Requirements 3308
A.10.3.3.3 SCell Activation and Deactivation of unknown NR SCell with NR PSCell and NR SCell under CCA 3309
A.10.3.3.3.1 Test Purpose and Environment 3309
A.10.3.3.3.2 Test Requirements 3309
A.10.3.4 Beam failure detection and link recovery procedures 3310
A.10.3.4.1 EN-DC Beam Failure Detection and Link Recovery Test for FR1 PSCell configured with SSB-based BFD and LR in non-DRX mode 3310
A.10.3.4.1.1 Test Purpose and Environment 3310
A.10.3.4.1.2 Test Requirements 3313
A.10.3.4.2 EN-DC Beam Failure Detection and Link Recovery Test for FR1 PSCell configured with SSB-based BFD and LR in DRX mode 3314
A.10.3.4.2.1 Test Purpose and Environment 3314
A.10.3.4.2.2 Test Requirements 3317
A.10.3.5 Active BWP switching 3318
A.10.3.5.1 UL active BWP switch delay with consistent UL LBT failure on PSCell subject to UL CCA in EN-DC 3318
A.10.3.5.1.2 Test Requirements 3321
A.10.3.5.2 DCI-based and Timer-based Active BWP Switch 3321
A.10.3.5.2.1 E-UTRAN – NR PSCell FR1 DL active BWP switch in non-DRX in synchronous EN-DC 3321

A.10.3.5.2.2 E-UTRAN – NR PSCell FR1 DL active BWP switch with FR1 SCell in non-DRX in synchronous EN-DC 3325
A.10.3.5.3 RRC-based Active BWP Switch 3328
A.10.3.5.3.1 E-UTRAN – NR PSCell FR1 DL active BWP switch in non-DRX in synchronous EN-DC 3328
A.10.3.6 PSCell addition and release delay 3331
A.10.3.6.1 Addition and Release Delay of known NR PSCell on the carrier under CCA 3331
A.10.3.6.1.1 Test purpose and environment 3331
A.10.3.6.1.2 Test Requirements 3334
A.10.3.7 Void 3335
A.10.4 Measurement procedure 3335
A.10.4.1 Intra-frequency measurements 3335
A.10.4.1.1 Event-triggered reporting tests on PSCC without gaps under non-DRX 3335
A.10.4.1.1.1 Test purpose and environment 3335
A.10.4.1.1.2 Test parameters 3335
A.10.4.1.1.3 Test Requirements 3336
A.10.4.1.2 Event-triggered reporting tests on PSCC without gaps under DRX 3336
A.10.4.1.2.1 Test purpose and environment 3336
A.10.4.1.2.2 Test parameters 3336
A.10.4.1.2.3 Test Requirements 3336
A.10.4.1.3 Event-triggered reporting tests on PSCC with per-UE gaps under non-DRX 3337
A.10.4.1.3.1 Test purpose and environment 3337
A.10.4.1.3.2 Test parameters 3337
A.10.4.1.3.3 Test Requirements 3337
A.10.4.1.4 Event-triggered reporting tests on PSCC with per-UE gaps under DRX 3337
A.10.4.1.4.1 Test purpose and environment 3337
A.10.4.1.4.2 Test parameters 3337
A.10.4.1.4.3 Test Requirements 3337
A.10.4.1.5 Event-triggered reporting tests on SCC without gaps under non-DRX 3338
A.10.4.1.5.1 Test purpose and environment 3338
A.10.4.1.5.2 Test parameters 3338
A.10.4.1.5.3 Test Requirements 3338
A.10.4.1.6 Event-triggered reporting tests on SCC without gaps under DRX 3338
A.10.4.1.6.1 Test purpose and environment 3338
A.10.4.1.6.2 Test parameters 3338
A.10.4.1.6.3 Test Requirements 3338
A.10.4.1.7 Event-triggered reporting tests on SCC with per-UE gaps under non-DRX 3339
A.10.4.1.7.1 Test purpose and environment 3339
A.10.4.1.7.2 Test parameters 3339
A.10.4.1.7.3 Test Requirements 3339
A.10.4.1.8 Event-triggered reporting tests on SCC with per-UE gaps under DRX 3339
A.10.4.1.8.1 Test purpose and environment 3339
A.10.4.1.8.2 Test parameters 3339
A.10.4.1.8.3 Test Requirements 3339
A.10.4.1.9 RSSI measurement reporting on PSCC 3339
A.10.4.1.9.1 Test purpose and environment 3339
A.10.4.1.9.2 Test parameters 3340
A.10.4.1.10 Channel occupancy measurement reporting on PSCC 3340
A.10.4.1.10.1 Test purpose and environment 3340
A.10.4.1.10.2 Test parameters 3340
A.10.4.1.11 RSSI measurement reporting on SCC 3340
A.10.4.1.11.1 Test purpose and environment 3340
A.10.4.1.11.2 Test parameters 3341
A.10.4.1.12 Channel occupancy measurement reporting on SCC 3341
A.10.4.1.12.1 Test purpose and environment 3341
A.10.4.1.12.2 Test parameters 3341
A.10.4.2 Inter-frequency measurements 3342
A.10.4.2.1 RSSI measurement reporting 3342
A.10.4.2.1.1 Test purpose and environment 3342
A.10.4.2.1.2 Test parameters 3342
A.10.4.2.2 Channel occupancy measurement reporting 3342
A.10.4.2.2.1 Test purpose and environment 3342
A.10.4.2.2.2 Test parameters 3342

A.10.4.2.3 EN-DC event triggered reporting tests for FR1 with CCA cell without SSB time index detection when DRX is not used....3343
A.10.4.2.3.1 Test Purpose and Environment....3343
A.10.4.2.3.2 Test Requirements....3345
A.10.4.2.4 EN-DC event triggered reporting tests for FR1 cell with CCA without SSB time index detection when DRX is used....3346
A.10.4.2.4.1 Test Purpose and Environment....3346
A.10.4.2.4.2 Test Requirements....3349
A.10.4.2.5 EN-DC event triggered reporting tests for FR1 cell with CCA with SSB time index detection when DRX is not used....3350
A.10.4.2.5.1 Test Purpose and Environment....3350
A.10.4.2.5.2 Test Requirements....3353
A.10.4.2.6 EN-DC event triggered reporting tests for FR1 cell with CCA with SSB time index detection when DRX is used....3353
A.10.4.2.6.1 Test Purpose and Environment....3353
A.10.4.2.6.2 Test Requirements....3357
A.10.4.2.7 EN-DC event triggered reporting tests for FR1 cell without SSB time index detection when DRX is not used....3358
A.10.4.2.7.1 Test Purpose and Environment....3358
A.10.4.2.7.2 Test Requirements....3361
A.10.4.2.8 EN-DC event triggered reporting tests for FR1 cell without SSB time index detection when DRX is used....3362
A.10.4.2.8.1 Test Purpose and Environment....3362
A.10.4.2.8.2 Test Requirements....3366
A.10.4.2.9 EN-DC event triggered reporting tests for FR1 cell with SSB time index detection when DRX is not used....3366
A.10.4.2.9.1 Test Purpose and Environment....3366
A.10.4.2.9.2 Test Requirements....3370
A.10.4.2.10 EN-DC event triggered reporting tests for FR1 cell with SSB time index detection when DRX is used....3371
A.10.4.2.10.1 Test Purpose and Environment....3371
A.10.4.2.10.2 Test Requirements....3375
A.10.4.3 L1-RSRP measurements for beam reporting....3376
A.10.4.3.1 SSB based L1-RSRP measurement on PSCC when DRX is not used....3376
A.10.4.3.1.1 Test Purpose and Environment....3376
A.10.4.3.1.2 Test parameters....3376
A.10.4.3.1.3 Test Requirements....3378
A.10.4.3.2 SSB based L1-RSRP measurement on PSCC when DRX is used....3378
A.10.4.3.2.1 Test Purpose and Environment....3378
A.10.4.3.2.2 Test parameters....3378
A.10.4.3.2.3 Test Requirements....3381
A.10.4.3.3 SSB based L1-RSRP measurement on SCC when DRX is not used....3381
A.10.4.3.3.1 Test Purpose and Environment....3381
A.10.4.3.3.2 Test parameters....3381
A.10.4.3.3.3 Test Requirements....3383
A.10.4.3.4 SSB based L1-RSRP measurement on SCC when DRX is used....3383
A.10.4.3.4.1 Test Purpose and Environment....3383
A.10.4.3.4.2 Test parameters....3384
A.10.4.3.4.3 Test Requirements....3386
A.10.4.4 E-UTRAN–NR inter-RAT measurements on NR carrier frequency under CCA....3386
A.10.4.4.1 E-UTRA-NR inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is not used....3386
A.10.4.4.1.1 Test Purpose and Environment....3386
A.10.4.4.1.2 Test Requirements....3390
A.10.4.4.2 E-UTRA-NR inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is used....3391
A.10.4.4.2.1 Test Purpose and Environment....3391
A.10.4.4.2.2 Test Requirements....3395
A.10.4.4.3 NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is not used....3395
A.10.4.4.3.1 Test Purpose and Environment....3395
A.10.4.4.3.2 Test Requirements....3399

A.10.4.4.4 NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is used....3400
A.10.4.4.4.1 Test Purpose and Environment....3400
A.10.4.4.4.2 Test Requirements....3404
A.10.5 Measurement performance....3404
A.10.5.1 SS-RSRP....3404
A.10.5.1.1 Intra-frequency measurement accuracy on a CCA serving cell....3404
A.10.5.1.1.1 Test Purpose and Environment....3404
A.10.5.1.1.2 Test parameters....3404
A.10.5.1.1.3 Test Requirements....3407
A.10.5.1.2 Inter-frequency measurement accuracy with FR1 CCA serving cell and FR1 CCA target cell....3407
A.10.5.1.2.1 Test Purpose and Environment....3407
A.10.5.1.2.2 Test parameters....3407
A.10.5.1.2.3 Test Requirements....3409
A.10.5.2 SS-RSRQ....3409
A.10.5.2.1 Intra-frequency measurement accuracy with FR1 CCA serving cell and FR1 CCA target cell....3409
A.10.5.2.1.1 Test Purpose and Environment....3409
A.10.5.2.1.2 Test Parameters....3409
A.10.5.2.1.3 Test Requirements....3411
A.10.5.2.2 Inter-frequency measurement accuracy with FR1 CCA serving cell and FR1 CCA target cell....3411
A.10.5.2.2.1 Test Purpose and Environment....3411
A.10.5.2.2.2 Test Parameters....3411
A.10.5.2.2.3 Test Requirements....3412
A.10.5.3 SS-SINR....3413
A.10.5.3.1 Intra-frequency measurement accuracy on PSCC....3413
A.10.5.3.1.1 Test Purpose and Environment....3413
A.10.5.3.1.2 Test Parameters....3413
A.10.5.3.1.3 Test Requirements....3415
A.10.5.3.2 Inter-frequency measurement accuracy on PSCC....3415
A.10.5.3.2.1 Test Purpose and Environment....3415
A.10.5.3.2.2 Test Parameters....3415
A.10.5.3.2.3 Test Requirements....3417
A.10.5.3.3 Intra-frequency measurement accuracy on SCC....3417
A.10.5.3.3.1 Test Purpose and Environment....3417
A.10.5.3.3.2 Test Parameters....3417
A.10.5.3.3.3 Test Requirements....3419
A.10.5.4 L1-RSRP measurement for beam reporting with CCA serving cell....3419
A.10.5.4.1 SSB based L1-RSRP measurement....3419
A.10.5.4.1.1 Test Purpose and Environment....3419
A.10.5.4.1.2 Test parameters....3419
A.10.5.4.1.3 Test Requirements....3421
A.10.5.5 RSSI....3421
A.10.5.5.1 RSSI measurement accuracy on PSCC with CCA....3421
A.10.5.5.1.1 Test Purpose and Environment....3421
A.10.5.5.1.2 Test parameters....3421
A.10.5.5.1.3 Test Requirements....3423
A.10.5.5.2 RSSI measurement accuracy on SCC with CCA....3423
A.10.5.5.2.1 Test Purpose and Environment....3423
A.10.5.5.2.2 Test parameters....3423
A.10.5.5.2.3 Test Requirements....3425
A.10.5.5.3 Inter-frequency RSSI measurement accuracy on a carrier with CCA....3425
A.10.5.5.3.1 Test Purpose and Environment....3425
A.10.5.5.3.2 Test parameters....3425
A.10.5.5.3.3 Test Requirements....3427
A.10.5.6 Channel occupancy....3427
A.10.5.6.1 Channel occupancy measurement accuracy on PSCC with CCA....3427
A.10.5.6.1.1 Test Purpose and Environment....3427
A.10.5.6.1.2 Test parameters....3427
A.10.5.6.1.3 Test Requirements....3428
A.10.5.6.2 Channel occupancy measurement accuracy on SCC with CCA....3429
A.10.5.6.2.1 Test Purpose and Environment....3429
A.10.5.6.2.2 Test parameters....3429

A.10.5.6.2.3 Test Requirements 3431
A.10.5.6.3 Inter-frequency channel occupancy measurement accuracy on a carrier with CCA 3431
A.10.5.6.3.1 Test Purpose and Environment 3431
A.10.5.6.3.2 Test parameters 3431
A.10.5.6.3.3 Test Requirements 3433

A.11 NR Standalone Tests with NR PCell under CCA and Other NR Cells in FR1 3434
A.11.1 RRC_IDLE state mobility 3434
A.11.1.1 Cell re-selection with both source and target NR carrier frequencies under CCA 3434
A.11.1.1.1 Cell reselection to FR1 intra-frequency NR cells when subject to CCA on the serving and target cell 3434
A.11.1.1.1.1 Test Purpose and Environment 3434
A.11.1.1.1.2 Test Parameters 3434
A.11.1.1.1.3 Test Requirements 3436
A.11.1.1.2 Cell reselection to FR1 inter-frequency NR case when subject to CCA on the serving and target cell 3437
A.11.1.1.2.1 Test Purpose and Environment 3437
A.11.1.1.2.2 Test Parameters 3437
A.11.1.1.2.3 Test Requirements 3439
A.11.1.2 Cell re-selection to NR with source NR carrier frequency under CCA 3440
A.11.1.2.1 Cell reselection to FR1 inter-frequency NR case when serving cell is subject to CCA 3440
A.11.1.2.1.1 Test Purpose and Environment 3440
A.11.1.2.1.2 Test Parameters 3440
A.11.1.2.1.3 Test Requirements 3443
A.11.1.3 Cell re-selection from NR carrier with target NR carrier frequency under CCA 3444
A.11.1.3.1 Cell reselection to FR1 inter-frequency NR case when target cell is subject to CCA 3444
A.11.1.3.1.1 Test Purpose and Environment 3444
A.11.1.3.1.2 Test Parameters 3444
A.11.1.3.1.3 Test Requirements 3447
A.11.1.4 Inter-RAT cell re-selection to E-UTRAN with source NR carrier frequency under CCA 3448
A.11.1.4.1 Cell reselection to higher priority E-UTRAN when serving cell is subject to CCA 3448
A.11.1.4.1.1 Test Purpose and Environment 3448
A.11.1.4.1.2 Test Parameters 3448
A.11.1.4.1.3 Test Requirements 3451
A.11.1.4.2 Cell reselection to lower priority E-UTRAN when serving cell is subject to CCA 3451
A.11.1.4.2.1 Test Purpose and Environment 3451
A.11.1.4.2.2 Test Requirements 3454
A.11.2 RRC_CONNECTED state mobility 3454
A.11.2.1 Handover 3454
A.11.2.1.1 Intra-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA; known target cell 3454
A.11.2.1.1.1 Test Purpose and Environment 3454
A.11.2.1.1.2 Test Parameters 3455
A.11.2.1.1.3 Test Requirements 3457
A.11.2.1.2 Intra-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA; unknown target cell 3457
A.11.2.1.2.1 Test Purpose and Environment 3457
A.11.2.1.2.2 Test Parameters 3458
A.11.2.1.2.3 Test Requirements 3460
A.11.2.1.3 Inter-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA; unknown target cell 3460
A.11.2.1.3.1 Test Purpose and Environment 3460
A.11.2.1.3.2 Test Parameters 3460
A.11.2.1.3.3 Test Requirements 3463
A.11.2.1.4 Inter-frequency handover from FR1 carrier under CCA to FR1; known target cell 3463
A.11.2.1.4.1 Test Purpose and Environment 3463
A.11.2.1.4.2 Test Parameters 3463
A.11.2.1.4.3 Test Requirements 3466
A.11.2.1.5 Inter-frequency handover from FR1 carrier under CCA to FR1; unknown target cell 3466
A.11.2.1.5.1 Test Purpose and Environment 3466
A.11.2.1.5.2 Test Parameters 3466
A.11.2.1.5.3 Test Requirements 3469

A.11.2.1.6 Inter-frequency handover from FR1 to FR1 carrier under CCA; unknown target cell 3469
A.11.2.1.6.1 Test Purpose and Environment 3469
A.11.2.1.6.2 Test Parameters 3469
A.11.2.1.6.3 Test Requirements 3472
A.11.2.1.7 SA NR FR1 carrier under CCA - E-UTRAN handover with known target cell 3472
A.11.2.1.7.1 Test Purpose and Environment 3472
A.11.2.1.7.2 Test Requirements 3476
A.11.2.1.8 SA NR FR1 carrier under CCA - E-UTRAN handover with unknown target cell 3476
A.11.2.1.8.1 Test Purpose and Environment 3476
A.11.2.1.8.2 Test Requirements 3479
A.11.2.1.9 Handover with PSCell from NR SA to EN-DC with known target PSCell using CCA 3480
A.11.2.1.9.1 Test Purpose and Environment 3480
A.11.2.1.9.2 Test Requirements 3486
A.11.2.2 RRC connection mobility control 3487
A.11.2.2.1 RRC re-establishment 3487
A.11.2.2.1.1 Intra-frequency RRC Re-establishment with CCA in FR1 3487
A.11.2.2.1.2 Inter-frequency RRC Re-establishment with CCA in FR1 3490
A.11.2.2.1.4 Inter-frequency RRC Re-establishment from NR FR1 carrier without CCA to NR FR1 carrier under CCA 3496
A.11.2.2.2 Random Access 3499
A.11.2.2.2.1 4-step RA type contention-based random access for NR PCell with CCA 3499
A.11.2.2.2.1.1 Test Purpose and Environment 3499
A.11.2.2.2.1.2 Test Requirements 3501
A.11.2.2.2.1.2.1 Random Access Preamble Transmission 3501
A.11.2.2.2.1.2.2 Random Access Response Reception 3501
A.11.2.2.2.1.2.3 No Random Access Response Reception 3502
A.11.2.2.2.1.2.4 Receiving an UL grant for msg3 retransmission 3502
A.11.2.2.2.1.2.5 Reception of an Incorrect Message over Temporary C-RNTI 3502
A.11.2.2.2.1.2.6 Reception of a Correct Message over Temporary C-RNTI 3502
A.11.2.2.2.1.2.7 Contention Resolution Timer expiry 3503
A.11.2.2.2.2 4-step RA type non-contention based random access for NR PSCell with CCA 3503
A.11.2.2.2.2.1 Test Purpose and Environment 3503
A.11.2.2.2.2.2 Test Requirements 3505
A.11.2.2.2.2.2.1 SSB-based Random Access Preamble Transmission 3505
A.11.2.2.2.2.2.2 Random Access Response Reception 3505
A.11.2.2.2.2.2.3 No Random Access Response Reception 3506
A.11.2.2.2.3 2-step RA type contention-based random access for NR PCell with CCA 3506
A.11.2.2.2.3.1 Test Purpose and Environment 3506
A.11.2.2.2.3.2 Test Requirements 3508
A.11.2.2.2.3.2.1 MsgA Transmission 3508
A.11.2.2.2.3.2.2 MsgB Reception 3508
A.11.2.2.2.3.2.3 No MsgB Reception 3509
A.11.2.2.2.4 2-step RA type non-contention-based random access for NR PCell with CCA 3509
A.11.2.2.2.4.1 Test Purpose and Environment 3509
A.11.2.2.2.4.2 Test Requirements 3511
A.11.2.2.2.4.2.1 MsgA Transmission 3511
A.11.2.2.2.4.2.2 MsgB Reception 3512
A.11.2.2.2.4.2.3 No MsgB Reception 3512
A.11.2.2.3 RRC connection release with redirection 3513
A.11.2.2.3.1 Redirection from NR FR1 carrier under CCA to NR FR1 carrier under CCA 3513
A.11.2.2.3.2 Redirection from NR FR1 carrier without CCA to NR FR1 carrier with CCA 3516
A.11.3 Timing 3519
A.11.3.1 UE transmit timing 3519
A.11.3.1.1 UE Transmit Timing Test with PCell under DL CCA 3519
A.11.3.1.1.1 Test Purpose and environment 3519
A.11.3.1.1.2 Test requirements 3521
A.11.3.2 UE timing advance 3521
A.11.3.2.1 UE Timing Advance Adjustment Accuracy with PCell under DL CCA 3521
A.11.3.2.1.1 Test Purpose and Environment 3521
A.11.3.2.1.2 Test Parameters 3521
A.11.3.2.1.3 Test Requirements 3524
A.11.4 Signalling characteristics 3524

A.11.4.1 Radio link monitoring 3524
A.11.4.1.1 Introduction 3524
A.11.4.1.2 Radio link monitoring out-of-sync test for PCell configured with SSB-based RLM RS in non-DRX mode 3525
A.11.4.1.2.1 Test purpose and environment 3525
A.11.4.1.2.2 Test requirements 3528
A.11.4.1.3 Radio link monitoring in-sync test for PCell configured with SSB-based RLM RS in non-DRX mode 3528
A.11.4.1.3.1 Test purpose and environment 3528
A.11.4.1.3.2 Test requirements 3532
A.11.4.1.4 Void 3532
A.11.4.1.4.1 Void 3532
A.11.4.1.4.2 Void 3532
A.11.4.1.5 Void 3532
A.11.4.1.5.1 Void 3532
A.11.4.1.5.2 Void 3532
A.11.4.2 Interruption 3533
A.11.4.2.1 NR interruptions during Scell operations with CCA on PCell and SCell 3533
A.11.4.2.1.1 Test Purpose and Environment 3533
A.11.4.2.1.2 Test Requirements 3535
A.11.4.3 SCell activation and deactivation delay 3535
A.11.4.3.1 SCell Activation and Deactivation of known SCell with PCell and SCell under CCA, 160 ms SCell measurement cycle 3535
A.11.4.3.1.1 Test Purpose and Environment 3535
A.11.4.3.1.2 Test Requirements 3538
A.11.4.3.2 SCell Activation and Deactivation of known SCell with PCell and SCell under CCA, 640 ms SCell measurement cycle 3539
A.11.4.3.2.1 Test Purpose and Environment 3539
A.11.4.3.2.2 Test Requirements 3539
A.11.4.3.3 SCell Activation and Deactivation of unknown SCell with PCell and SCell under CCA 3540
A.11.4.3.3.1 Test Purpose and Environment 3540
A.11.4.3.3.2 Test Requirements 3540
A.11.4.4 Beam failure detection and link recovery procedures 3541
A.11.4.4.1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in non-DRX mode 3541
A.11.4.4.1.1 Test Purpose and Environment 3541
A.11.4.4.1.2 Test Requirements 3544
A.11.4.4.2 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in DRX mode 3545
A.11.4.4.2.1 Test Purpose and Environment 3545
A.11.4.4.2.2 Test Requirements 3548
A.11.4.5 Active BWP switching 3549
A.11.4.5.1 UL active BWP switch delay with consistent UL LBT failure on PCell subject to UL CCA 3549
A.11.4.5.1.1 Test Purpose and Environment 3549
A.11.4.5.1.2 Test Requirements 3552
A.11.4.5.2 DCI-based and Timer-based Active BWP Switch 3552
A.11.4.5.2.1 NR FR1- NR FR1 DL active BWP switch of PCell with non-DRX in SA 3552
A.11.4.5.2.2 NR FR1 DL active BWP switch with non-DRX in SA 3555
A.11.4.5.3 RRC-based Active BWP Switch 3558
A.11.4.5.3.1 NR FR1 DL active BWP switch of Cell with non-DRX in SA 3558
A.11.4.6 Void 3560
A.11.5 Measurement procedure 3560
A.11.5.1 Intra-frequency measurements 3560
A.11.5.1.1 Event-triggered reporting tests on PCC without gaps under non-DRX 3560
A.11.5.1.1.1 Test purpose and environment 3560
A.11.5.1.1.2 Test parameters 3560
A.11.5.1.1.3 Test Requirements 3561
A.11.5.1.2 Event-triggered reporting tests on PCC without gaps under DRX 3561
A.11.5.1.2.1 Test purpose and environment 3561
A.11.5.1.2.2 Test parameters 3562
A.11.5.1.2.3 Test Requirements 3562
A.11.5.1.3 Event-triggered reporting tests on PCC with per-UE gaps under non-DRX 3562

A.11.5.1.3.1 Test purpose and environment....3562
A.11.5.1.3.2 Test parameters....3562
A.11.5.1.3.3 Test Requirements....3562
A.11.5.1.4 Event-triggered reporting tests on PCC with per-UE gaps under DRX....3562
A.11.5.1.4.1 Test purpose and environment....3562
A.11.5.1.4.2 Test parameters....3563
A.11.5.1.4.3 Test Requirements....3563
A.11.5.1.5 Event-triggered reporting tests on SCC without gaps under non-DRX....3563
A.11.5.1.5.1 Test purpose and environment....3563
A.11.5.1.5.2 Test parameters....3563
A.11.5.1.6 Event-triggered reporting tests on SCC without gaps under DRX....3563
A.11.5.1.6.1 Test purpose and environment....3563
A.11.5.1.6.2 Test parameters....3564
A.11.5.1.6.3 Test Requirements....3564
A.11.5.1.7 Event-triggered reporting tests on SCC with per-UE gaps under non-DRX....3564
A.11.5.1.7.1 Test purpose and environment....3564
A.11.5.1.7.2 Test parameters....3564
A.11.5.1.7.3 Test Requirements....3564
A.11.5.1.8 Event-triggered reporting tests on SCC with per-UE gaps under DRX....3564
A.11.5.1.8.1 Test purpose and environment....3564
A.11.5.1.8.2 Test parameters....3565
A.11.5.1.8.3 Test Requirements....3565
A.11.5.1.9 RSSI measurement reporting on PCC....3565
A.11.5.1.9.1 Test purpose and environment....3565
A.11.5.1.9.2 Test parameters....3565
A.11.5.1.10 Channel occupancy measurement reporting on PCC....3565
A.11.5.1.10.1 Test purpose and environment....3565
A.11.5.1.10.2 Test parameters....3565
A.11.5.1.11 RSSI measurement reporting on SCC....3566
A.11.5.1.11.1 Test purpose and environment....3566
A.11.5.1.11.2 Test parameters....3566
A.11.5.1.12 Channel occupancy measurement reporting on SCC....3566
A.11.5.1.12.1 Test purpose and environment....3566
A.11.5.1.12.2 Test parameters....3566
A.11.5.2 Inter-frequency measurements....3567
A.11.5.2.1 RSSI measurement reporting....3567
A.11.5.2.1.1 Test purpose and environment....3567
A.11.5.2.1.2 Test parameters....3567
A.11.5.2.2 Channel occupancy measurement reporting....3567
A.11.5.2.2.1 Test purpose and environment....3567
A.11.5.2.2.2 Test parameters....3567
A.11.5.2.3 Event triggered reporting tests for FR1 with CCA without SSB time index detection when DRX is not used....3568
A.11.5.2.3.1 Test Purpose and Environment....3568
A.11.5.2.3.2 Test Requirements....3571
A.11.5.2.4 Event triggered reporting tests for FR1 with CCA without SSB time index detection when DRX is used....3571
A.11.5.2.4.1 Test Purpose and Environment....3571
A.11.5.2.4.2 Test Requirements....3574
A.11.5.2.5 Event triggered reporting tests for FR1 with CCA with SSB time index detection when DRX is not used....3575
A.11.5.2.5.1 Test Purpose and Environment....3575
A.11.5.2.5.2 Test Requirements....3578
A.11.5.2.6 Event triggered reporting tests for FR1 with CCA with SSB time index detection when DRX is used....3578
A.11.5.2.6.1 Test Purpose and Environment....3578
A.11.5.2.6.2 Test Requirements....3582
A.11.5.2.7 Event triggered reporting tests for FR1 without SSB time index detection when DRX is not used....3582
A.11.5.2.7.1 Test Purpose and Environment....3582
A.11.5.2.7.2 Test Requirements....3585
A.11.5.2.8 Event triggered reporting tests for FR1 without SSB time index detection when DRX is used....3586
A.11.5.2.8.1 Test Purpose and Environment....3586

A.11.5.2.8.2 Test Requirements 3589
A.11.5.2.9 Event triggered reporting tests for FR1 with SSB time index detection when DRX is not used 3590
A.11.5.2.9.1 Test Purpose and Environment 3590
A.11.5.2.9.2 Test Requirements 3593
A.11.5.2.10 Event triggered reporting tests for FR1 with SSB time index detection when DRX is used 3594
A.11.5.2.10.1 Test Purpose and Environment 3594
A.11.5.2.10.2 Test Requirements 3597
A.11.5.3 Inter-RAT E-UTRAN measurements 3598
A.11.5.4 L1-RSRP measurements for beam reporting 3598
A.11.5.4.1 SSB based L1-RSRP measurement when DRX is not used 3598
A.11.5.4.1.1 Test Purpose and Environment 3598
A.11.5.4.1.2 Test parameters 3598
A.11.5.4.1.3 Test Requirements 3600
A.11.5.4.2 SSB based L1-RSRP measurement when DRX is used 3600
A.11.5.4.2.1 Test Purpose and Environment 3600
A.11.5.4.2.2 Test parameters 3601
A.11.5.4.2.3 Test Requirements 3603
A.11.5.4.3 SSB based L1-RSRP measurement on SCC when DRX is not used 3603
A.11.5.4.3.1 Test Purpose and Environment 3603
A.11.5.4.3.2 Test parameters 3603
A.11.5.4.3.3 Test Requirements 3605
A.11.5.4.4 SSB based L1-RSRP measurement on SCC when DRX is used 3605
A.11.5.4.4.1 Test Purpose and Environment 3605
A.11.5.4.4.2 Test parameters 3606
A.11.5.4.4.3 Test Requirements 3608
A.11.6 Measurement performance 3608
A.11.6.1 SS-RSRP 3608
A.11.6.1.1 Intra-frequency measurement accuracy on a carrier frequency with CCA 3608
A.11.6.1.1.1 Test Purpose and Environment 3608
A.11.6.1.1.2 Test parameters 3608
A.11.6.1.1.3 Test Requirements 3610
A.11.6.1.2 Intra-frequency measurement accuracy on SCC on a carrier frequency with CCA 3610
A.11.6.1.2.1 Test Purpose and Environment 3610
A.11.6.1.2.2 Test parameters 3610
A.11.6.1.2.3 Test Requirements 3612
A.11.6.2 SS-RSRQ 3612
A.11.6.2.1 Intra-frequency measurement accuracy 3612
A.11.6.2.1.1 Test Purpose and Environment 3612
A.11.6.2.1.2 Test Parameters 3612
A.11.6.2.1.3 Test Requirements 3614
A.11.6.2.2 Inter-frequency measurement accuracy 3614
A.11.6.2.2.1 Test Purpose and Environment 3614
A.11.6.2.2.2 Test Parameters 3614
A.11.6.2.2.3 Test Requirements 3616
A.11.6.2.3 Intra-frequency measurement accuracy on SCC 3616
A.11.6.2.3.1 Test Purpose and Environment 3616
A.11.6.2.3.2 Test Parameters 3616
A.11.6.2.3.3 Test Requirements 3618
A.11.6.2.4 Inter-frequency measurement accuracy 3618
A.11.6.2.4.1 Test Purpose and Environment 3618
A.11.6.2.4.2 Test Parameters 3618
A.11.6.2.4.3 Test Requirements 3623
A.11.6.3 SS-SINR 3623
A.11.6.3.1 Intra-frequency measurement accuracy 3623
A.11.6.3.1.1 Test Purpose and Environment 3623
A.11.6.3.1.2 Test Parameters 3623
A.11.6.3.1.3 Test Requirements 3625
A.11.6.3.2 Inter-frequency measurement accuracy 3625
A.11.6.3.2.1 Test Purpose and Environment 3625
A.11.6.3.2.2 Test Parameters 3625
A.11.6.3.2.3 Test Requirements 3627
A.11.6.3.3 Intra-frequency measurement accuracy on SCC 3627

A.11.6.3.3.1 Test Purpose and Environment 3627
A.11.6.3.3.2 Test Parameters 3627
A.11.6.3.3.3 Test Requirements 3629
A.11.6.3.4 Inter-frequency measurement accuracy 3629
A.11.6.3.4.1 Test Purpose and Environment 3629
A.11.6.3.4.2 Test Parameters 3629
A.11.6.3.4.3 Test Requirements 3634
A.11.6.4 L1-RSRP measurement for beam reporting with CCA serving cell 3634
A.11.6.4.1 SSB based L1-RSRP measurement 3634
A.11.6.4.1.1 Test Purpose and Environment 3634
A.11.6.4.1.2 Test parameters 3634
A.11.6.4.1.3 Test Requirements 3636
A.11.6.5 RSSI 3636
A.11.6.5.1 Intra-frequency RSSI measurement accuracy on PCC with CCA 3636
A.11.6.5.1.1 Test Purpose and Environment 3636
A.11.6.5.1.2 Test parameters 3636
A.11.6.5.1.3 Test Requirements 3637
A.11.6.5.2 Intra-frequency RSSI measurement accuracy on SCC with CCA 3638
A.11.6.5.2.1 Test Purpose and Environment 3638
A.11.6.5.2.2 Test parameters 3638
A.11.6.5.2.3 Test Requirements 3639
A.11.6.5.3 Inter-frequency RSSI measurement accuracy on a carrier with CCA 3640
A.11.6.5.3.1 Test Purpose and Environment 3640
A.11.6.5.3.2 Test parameters 3640
A.11.6.5.3.3 Test Requirements 3641
A.11.6.6 Channel occupancy 3642
A.11.6.6.1 Intra-frequency channel occupancy measurement accuracy on PCC with CCA 3642
A.11.6.6.1.1 Test Purpose and Environment 3642
A.11.6.6.1.2 Test parameters 3642
A.11.6.6.1.3 Test Requirements 3643
A.11.6.6.2 Intra-frequency channel occupancy measurement accuracy on SCC with CCA 3643
A.11.6.6.2.1 Test Purpose and Environment 3643
A.11.6.6.2.2 Test parameters 3643
A.11.6.6.2.3 Test Requirements 3645
A.11.6.6.3 Inter-frequency channel occupancy measurement accuracy on a carrier with CCA 3645
A.11.6.6.3.1 Test Purpose and Environment 3645
A.11.6.6.3.2 Test parameters 3645
A.11.6.6.3.3 Test Requirements 3647
A.11.6.7 E-UTRAN RSRP 3648
A.11.6.8 E-UTRAN RSRQ 3648
A.11.6.9 E-UTRAN SINR 3648
A.12 E-UTRA Standalone Tests with at Least One NR Cell under CCA 3648
A.12.1 RRC_IDLE state mobility 3648
A.12.1.1 Inter-RAT cell re-selection to NR on a carrier frequency with CCA 3648
A.12.1.1.1 E-UTRA Cell reselection to higher priority NR target Cell in FR1 when target cell is subject to CCA 3648
A.12.1.1.1.1 Test Purpose and Environment 3648
A.12.1.1.1.2 Test Requirements 3651
A.12.2 RRC_CONNECTED state mobility 3652
A.12.2.1 Handover 3652
A.12.2.1.1 E-UTRAN - NR with CCA handover 3652
A.12.2.1.1.1 Test Purpose and Environment 3652
A.12.2.1.1.2 Test Requirements 3655
A.12.3 Signalling characteristics 3656
A.12.3.1 Interruptions 3656
A.12.4 Measurement procedure 3656
A.12.4.1 E-UTRAN–NR inter-RAT SFTD measurements 3656
A.12.4.1.1 E-UTRA – NR Inter-RAT SFTD Measurement Delay with NR under CCA in non-DRX 3656
A.12.4.1.1.1 Test Purpose and Environment 3656
A.12.4.1.1.2 Test Requirements 3658
A.12.4.2 E-UTRAN–NR inter-RAT measurements on NR carrier frequency under CCA 3658

A.12.4.2.1 E-UTRA-NR inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is not used 3658
A.12.4.2.1.1 Test Purpose and Environment 3658
A.12.4.2.1.2 Test Requirements 3662
A.12.4.2.2 E-UTRA-NR inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is used 3662
A.12.4.2.2.1 Test Purpose and Environment 3662
A.12.4.2.2.2 Test Requirements 3666
A.12.4.2.3 NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is not used 3666
A.12.4.2.3.1 Test Purpose and Environment 3666
A.12.4.2.3.2 Test Requirements 3670
A.12.4.2.4 NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is used 3670
A.12.4.2.4.1 Test Purpose and Environment 3670
A.12.4.2.4.2 Test Requirements 3674
A.12.4.2.5 RSSI measurement reporting 3674
A.12.4.2.5.1 Test purpose and environment 3674
A.12.4.2.5.2 Test parameters 3674
A.12.4.2.6 Channel occupancy measurement reporting 3675
A.12.4.2.6.1 Test purpose and environment 3675
A.12.4.2.6.2 Test parameters 3675
A.12.5 Measurement performance 3675
A.12.5.1 E-UTRAN–NR SFTD 3675
A.12.5.1.1 Inter-RAT SFTD accuracy with NR target cell under CCA 3675
A.12.5.1.1.1 Test Purpose 3675
A.12.5.1.1.2 Test Environment 3675
A.12.5.1.1.3 Test Requirements 3678
A.12.5.2 E-UTRAN–NR SS-RSRP 3678
A.12.5.3 E-UTRAN–NR SS-RSRQ 3678
A.12.5.4 E-UTRAN–NR SS-SINR 3678
A.12.5.5 E-UTRAN–NR RSSI 3678
A.12.5.6 E-UTRAN–NR channel occupancy 3678

A.13 NR Standalone Tests with NR SCell under CCA and All Other NR Cells in FR1 3679
A.13.1 Timing 3679
A.13.1.1 UE transmit timing 3679
A.13.1.2 Timing advance 3679
A.13.2 Signalling characteristics 3679
A.13.2.1 Interruption 3679
A.13.2.1.1 NR interruptions during SCell operations with CCA on SCell 3679
A.13.2.1.1.1 Test Purpose and Environment 3679
A.13.2.1.1.2 Test Requirements 3681
A.13.2.2 SCell activation and deactivation delay 3682
A.13.2.2.1 SCell Activation and Deactivation of known SCell under CCA, 160 ms SCell measurement cycle 3682
A.13.2.2.1.1 Test Purpose and Environment 3682
A.13.2.2.1.2 Test Requirements 3685
A.13.2.2.2 SCell Activation and Deactivation of known SCell under CCA, 640 ms SCell measurement cycle 3685
A.13.2.2.2.1 Test Purpose and Environment 3685
A.13.2.2.2.2 Test Requirements 3686
A.13.2.2.3 SCell Activation and Deactivation of unknown SCell under CCA 3686
A.13.2.2.3.1 Test Purpose and Environment 3686
A.13.2.2.3.2 Test Requirements 3687
A.13.2.3 Void 3687
A.13.3 Measurement procedure 3687
A.13.3.1 Intra-frequency measurements 3687
A.13.3.1.1 Event-triggered reporting tests on SCC without gaps under non-DRX 3687
A.13.3.1.1.1 Test purpose and environment 3687
A.13.3.1.1.2 Test parameters 3687
A.13.3.1.1.3 Test Requirements 3690
A.13.3.1.2 Event-triggered reporting tests on SCC without gaps under DRX 3690
A.13.3.1.2.1 Test purpose and environment 3690

A.13.3.1.2.2 Test parameters....3690
A.13.3.1.2.3 Test Requirements....3693
A.13.3.1.3 Event-triggered reporting tests on SCC with per-UE gaps under non-DRX....3693
A.13.3.1.3.1 Test purpose and environment....3693
A.13.3.1.3.2 Test parameters....3693
A.13.3.1.3.3 Test Requirements....3696
A.13.3.1.4 Event-triggered reporting tests on SCC with per-UE gaps under DRX....3696
A.13.3.1.4.1 Test purpose and environment....3696
A.13.3.1.4.2 Test parameters....3697
A.13.3.1.4.3 Test Requirements....3699
A.13.3.1.5 RSSI measurement reporting on SCC....3700
A.13.3.1.5.1 Test purpose and environment....3700
A.13.3.1.5.2 Test parameters....3700
A.13.3.1.6 Channel occupancy measurement reporting on SCC....3701
A.13.3.1.6.1 Test purpose and environment....3701
A.13.3.1.6.2 Test parameters....3701
A.13.3.2 Inter-frequency measurements....3702
A.13.3.2.1 RSSI measurement reporting....3702
A.13.3.2.1.1 Test purpose and environment....3702
A.13.3.2.1.2 Test parameters....3702
A.13.3.2.2 Channel occupancy measurement reporting....3702
A.13.3.2.2.1 Test purpose and environment....3702
A.13.3.2.2.2 Test parameters....3702
A.13.3.2.3 Event triggered reporting tests for FR1 with CCA without SSB time index detection when DRX is not used....3703
A.13.3.2.3.1 Test Purpose and Environment....3703
A.13.3.2.3.2 Test Requirements....3706
A.13.3.2.4 Event triggered reporting tests for FR1 with CCA without SSB time index detection when DRX is used....3707
A.13.3.2.4.1 Test Purpose and Environment....3707
A.13.3.2.4.2 Test Requirements....3711
A.13.3.2.5 Event triggered reporting tests for FR1 with CCA with SSB time index detection when DRX is not used....3712
A.13.3.2.5.1 Test Purpose and Environment....3712
A.13.3.2.5.2 Test Requirements....3715
A.13.3.2.6 Event triggered reporting tests for FR1 with CCA with SSB time index detection when DRX is used....3716
A.13.3.2.6.1 Test Purpose and Environment....3716
A.13.3.2.6.2 Test Requirements....3720
A.13.3.3 L1-RSRP measurements for beam reporting....3720
A.13.3.3.1 SSB based L1-RSRP measurement when DRX is not used....3720
A.13.3.3.1.1 Test Purpose and Environment....3720
A.13.3.3.1.2 Test parameters....3721
A.13.3.3.1.3 Test Requirements....3723
A.13.3.3.2 SSB based L1-RSRP measurement when DRX is used....3723
A.13.3.3.2.1 Test Purpose and Environment....3723
A.13.3.3.2.2 Test parameters....3724
A.13.3.3.2.3 Test Requirements....3726
A.13.4 Measurement performance....3726
A.13.4.1 SS-RSRP....3726
A.13.4.1.1 Intra-frequency measurement accuracy on a carrier frequency with CCA....3726
A.13.4.1.1.1 Test Purpose and Environment....3726
A.13.4.1.1.2 Test parameters....3726
A.13.4.1.1.3 Test Requirements....3728
A.13.4.2 SS-RSRQ....3728
A.13.4.2.1 Intra-frequency measurement accuracy on SCC....3728
A.13.4.2.1.1 Test Purpose and Environment....3728
A.13.4.2.1.2 Test Parameters....3728
A.13.4.2.1.3 Test Requirements....3734
A.13.4.3 SS-SINR....3734
A.13.4.3.1 Intra-frequency measurement accuracy on SCC....3734
A.13.4.3.1.1 Test Purpose and Environment....3734

A.13.4.3.1.2 Test Parameters 3734
A.13.4.3.1.3 Test Requirements 3739
A.13.4.4 L1-RSRP measurement for beam reporting with CCA serving cell 3739
A.13.4.4.1 SSB based L1-RSRP measurement 3739
A.13.4.4.1.1 Test Purpose and Environment 3739
A.13.4.4.1.2 Test parameters 3739
A.13.4.4.1.3 Test Requirements 3742
A.13.4.5 RSSI 3742
A.13.4.5.1 Intra-frequency RSSI measurement accuracy on a carrier with CCA 3742
A.13.4.5.1.1 Test Purpose and Environment 3742
A.13.4.5.1.2 Test parameters 3742
A.13.4.5.1.3 Test Requirements 3744
A.13.4.5.2 Inter-frequency RSSI measurement accuracy on a carrier with CCA 3744
A.13.4.5.2.1 Test Purpose and Environment 3744
A.13.4.5.2.2 Test parameters 3744
A.13.4.5.2.3 Test Requirements 3746
A.13.4.6 Channel occupancy 3746
A.13.4.6.1 Intra-frequency channel occupancy measurement accuracy on SCC with CCA 3746
A.13.4.6.1.1 Test Purpose and Environment 3746
A.13.4.6.1.2 Test parameters 3746
A.13.4.6.1.3 Test Requirements 3748
A.13.4.6.2 Inter-frequency channel occupancy measurement accuracy on a carrier with CCA 3748
A.13.4.6.2.1 Test Purpose and Environment 3748
A.13.4.6.2.2 Test parameters 3748
A.13.4.6.2.3 Test Requirements 3750
A.14 NR standalone tests for Satellite access 3751
A.14.1 RRC_IDLE state mobility 3751
A.14.1.1 Cell reselection to FR1 intra-frequency NR case 3751
A.14.1.1.1 Test Purpose and Environment 3751
A.14.1.1.2 Test Parameters 3751
A.14.1.1.3 Test Requirements 3752
A.14.1.2 Cell reselection to FR1 intra-frequency NR cell for UE configured with [capability for enhanced requirements] 3753
A.14.1.2.1 Test Purpose and Environment 3753
A.14.1.2.2 Test Parameters 3753
A.14.1.2.3 Test Requirements 3755
A.14.1.3 Time-based cell reselection to FR1 intra-frequency NR cell 3756
A.14.1.3.1 Test Purpose and Environment 3756
A.14.1.3.2 Test Parameters 3756
A.14.1.3.3 Test Requirements 3757
A.14.1.4 Location-based cell reselection to FR1 intra-frequency NR cell 3758
A.14.1.4.1 Test Purpose and Environment 3758
A.14.1.4.2 Test Parameters 3758
A.14.1.4.3 Test Requirements 3759
A.14.1.5 Cell reselection to FR1 inter-frequency NR case 3760
A.14.1.5.1 Test Purpose and Environment 3760
A.14.1.5.2 Test Parameters 3760
A.14.1.5.3 Test Requirements 3762
A.14.1.6 Cell reselection to FR1 inter-frequency NR cell for UE configured with [capability for enhanced requirements] 3762
A.14.1.6.1 Test Purpose and Environment 3762
A.14.1.6.2 Test Parameters 3762
A.14.1.6.3 Test Requirements 3764
A.14.1.7 Time-based Cell reselection to FR1 inter-frequency NR satellite access case 3764
A.14.1.7.1 Test Purpose and Environment 3764
A.14.1.7.2 Test Parameters 3765
A.14.1.7.3 Test Requirements 3766
A.14.1.8 Location-based Cell reselection to FR1 inter-frequency NR satellite access case 3766
A.14.1.8.1 Test Purpose and Environment 3766
A.14.1.8.2 Test Parameters 3767
A.14.1.8.3 Test Requirements 3768

A.14.1.9 Cell reselection to FR1 inter-frequency NR case for UE fulfilling low mobility relaxed measurement criterion 3769
A.14.1.9.1 Test Purpose and Environment 3769
A.14.1.9.2 Test Parameters 3769
A.14.1.9.3 Test Requirements 3772
A.14.1.10 Cell reselection to FR1 inter-frequency NR case for UE fulfilling not-at-cell edge relaxed measurement criterion 3772
A.14.1.10.1 Test Purpose and Environment 3772
A.14.1.10.2 Test Parameters 3772
A.14.1.10.3 Test Requirements 3774
A.14.2 RRC_CONNECTED state mobility 3775
A.14.2.1 Handover 3775
A.14.2.1.1 Intra-frequency SAN Handover from FR1 to FR1 3775
A.14.2.1.1.1 Test Purpose and Environment 3775
A.14.2.1.1.2 Test Parameters 3775
A.14.2.1.1.3 Test Requirements 3777
A.14.2.1.2 Inter-frequency SAN Handover from FR1 to FR1 3777
A.14.2.1.2.1 Test Purpose and Environment 3777
A.14.2.1.2.2 Test Parameters 3778
A.14.2.1.2.3 Test Requirements 3779
A.14.2.1.3 Intra-frequency SAN time-based conditional Handover from FR1 to FR1 3780
A.14.2.1.3.1 Test Purpose and Environment 3780
A.14.2.1.3.2 Test Parameters 3780
A.14.2.1.3.3 Test Requirements 3782
A.14.2.1.4 Inter-frequency SAN time-based conditional Handover from FR1 to FR1 3782
A.14.2.1.4.1 Test Purpose and Environment 3782
A.14.2.1.4.2 Test Parameters 3782
A.14.2.1.4.3 Test Requirements 3784
A.14.2.1.5 Intra-frequency SAN distance-based conditional Handover from FR1 to FR1 3784
A.14.2.1.5.1 Test Purpose and Environment 3784
A.14.2.1.5.2 Test Parameters 3785
A.14.2.1.5.3 Test Requirements 3787
A.14.2.1.6 Inter-frequency SAN distance-based conditional Handover from FR1 to FR1 3787
A.14.2.1.6.1 Test Purpose and Environment 3787
A.14.2.1.6.2 Test Parameters 3787
A.14.2.1.6.3 Test Requirements 3789
A.14.2.2 RRC Connection Mobility Control 3790
A.14.2.2.1 SA: RRC Re-establishment for SAN 3790
A.14.2.2.1.1 Intra-frequency RRC Re-establishment in FR1 3790
A.14.2.2.1.2 Inter-frequency RRC Re-establishment in FR1 3792
A.14.2.2.2 Random Access 3795
A.14.2.2.2.1 4-step RA type contention based random access test in FR1 for NR standalone 3795
A.14.2.2.2.1.1 Test Purpose and Environment 3795
A.14.2.2.2.1.2 Test Requirements 3796
A.14.2.2.2.2 4-step RA type non-contention based random access test in FR1 for NR standalone 3798
A.14.2.2.2.2.1 Test Purpose and Environment 3798
A.14.2.2.2.2.2 Test Requirements 3800
A.14.2.2.3 RRC Connection Release with Redirection 3801
A.14.2.2.3.1 Redirection from NR in FR1 to NR in FR1 3801
A.14.2.2.3.1.1 Test Purpose and Environment 3801
A.14.2.2.3.1.2 Test Parameters 3801
A.14.2.2.3.1.3 Test Requirements 3803
A.14.3 Timing for Satellite Access 3803
A.14.3.1 UE transmit timing for Satellite Access 3803
A.14.3.1.1 NR UE Transmit Timing Test for FR1 3803
A.14.3.1.1.1 Test Purpose and environment 3803
A.14.3.1.1.2 Test requirements 3805
A.14.3.2 Timing advance for satellite access 3806
A.14.3.2.1 SA FR1 timing advance adjustment accuracy 3806
A.14.3.2.1.1 Test Purpose and Environment 3806
A.14.3.2.1.2 Test Parameters 3806
A.14.3.2.1.3 Test Requirements 3809

A.14.4 Signalling characteristics 3809
A.14.4.1 Radio link Monitoring 3809
A.14.4.1.1 Radio Link Monitoring Out-of-sync Test for FR1 SAN PCell configured with SSB-based RLM RS in non-DRX mode 3809
A.14.4.1.1.1 Test Purpose and Environment 3809
A.14.4.1.1.2 Test Requirements 3812
A.14.4.1.2 Radio Link Monitoring In-sync Test for FR1 SAN PCell configured with SSB-based RLM RS in non-DRX mode 3812
A.14.4.1.2.1 Test Purpose and Environment 3812
A.14.4.1.2.2 Test Requirements 3815
A.14.4.1.3 Radio Link Monitoring Out-of-sync Test for FR1 SAN PCell configured with SSB-based RLM RS in DRX mode 3816
A.14.4.1.3.1 Test Purpose and Environment 3816
A.14.4.1.3.2 Test Requirements 3818
A.14.4.1.4 Radio Link Monitoring In-sync Test for FR1 SAN PCell configured with SSB-based RLM RS in DRX mode 3819
A.14.4.1.4.1 Test Purpose and Environment 3819
A.14.4.1.4.2 Test Requirements 3822
A.14.4.1.5 Radio Link Monitoring Out-of-sync Test for FR1 SAN PCell configured with CSI-RS-based RLM in non-DRX mode 3822
A.14.4.1.5.1 Test Purpose and Environment 3822
A.14.4.1.5.2 Test Requirements 3825
A.14.4.1.6 Radio Link Monitoring In-sync Test for FR1 SAN PCell configured with CSI-RS-based RLM in non-DRX mode 3825
A.14.4.1.6.1 Test Purpose and Environment 3825
A.14.4.1.6.2 Test Requirements 3828
A.14.4.1.7 Radio Link Monitoring Out-of-sync Test for FR1 SAN PCell configured with CSI-RS-based RLM in DRX mode 3828
A.14.4.1.7.1 Test Purpose and Environment 3828
A.14.4.1.7.2 Test Requirements 3831
A.14.4.1.8 Radio Link Monitoring In-sync Test for FR1 SAN PCell configured with CSI-RS-based RLM in DRX mode 3831
A.14.4.1.8.1 Test Purpose and Environment 3831
A.14.4.1.8.2 Test Requirements 3834
A.14.4.2 Beam Failure Detection and Link recovery procedures for satellite access 3835
A.14.4.2.1 Beam Failure Detection and Link Recovery Test for FR1 PCell for satellite access configured with SSB-based BFD and LR in non-DRX mode 3835
A.14.4.2.1.1 Test Purpose and Environment 3835
A.14.4.2.1.2 Test Requirements 3838
A.14.4.2.2 Beam Failure Detection and Link Recovery Test for FR1 PCell for satellite access configured with SSB-based BFD and LR in DRX mode 3839
A.14.4.2.2.1 Test Purpose and Environment 3839
A.14.4.2.2.2 Test Requirements 3842
A.14.4.2.3 Beam Failure Detection and Link Recovery Test for FR1 PCell for satellite access configured with CSI-RS-based BFD and LR in non-DRX mode 3843
A.14.4.2.3.1 Test Purpose and Environment 3843
A.14.4.2.3.2 Test Requirements 3846
A.14.4.2.4 Beam Failure Detection and Link Recovery Test for FR1 PCell for satellite access configured with CSI-RS-based BFD and LR in DRX mode 3846
A.14.4.2.4.1 Test Purpose and Environment 3846
A.14.4.2.4.2 Test Requirements 3849
A.14.4.2.5 Beam Failure Detection and Link Recovery Test for FR1 SCell for satellite access configured with CSI-RS-based BFD and SSB-based LR in non-DRX mode 3850
A.14.4.2.5.1 Test Purpose and Environment 3850
A.14.4.2.5.2 Test Requirements 3853
A.14.4.2.6 Beam Failure Detection and Link Recovery Test for FR1 SCell for satellite access configured with CSI-RS-based BFD and SSB-based LR in DRX mode 3854
A.14.4.2.6.1 Test Purpose and Environment 3854
A.14.4.2.6.2 Test Requirements 3857
A.14.4.3 Active BWP switch for satellite access 3858
A.14.4.3.1 DCI-based and Timer-based Active BWP Switch 3858
A.14.4.3.1.1 NR FR1 DL active BWP switch with non-DRX in SA 3858

A.14.4.3.1.1.1 Test Purpose and Environment 3858
A.14.4.3.1.1.2 Test Requirements 3860
A.14.4.3.2 RRC-based Active BWP Switch 3861
A.14.4.3.2.1 NR FR1 DL active BWP switch of Cell with non-DRX in SA 3861
A.14.4.3.2.1.1 Test Purpose and Environment 3861
A.14.4.3.2.1.2 Test Requirements 3863
A.14.4.4 UE specific CBW change for satellite access 3863
A.14.4.4.1 UE specific CBW change on PCell in FR1 in non-DRX 3863
A.14.4.4.1.1 Test Purpose and Environment 3863
A.14.4.4.1.2 Test Requirements 3865
A.14.4.5 Pathloss reference signal switching delay 3866
A.14.4.5.1 MAC-CE based pathloss reference signal switch delay 3866
A.14.4.5.1.1 Test Purpose and Environment 3866
A.14.4.5.1.2 Test Requirements 3868
A.14.5 Measurement procedure 3869
A.14.5.1 Intra-frequency Measurements 3869
A.14.5.1.1 SA event triggered reporting tests without gap under non-DRX 3869
A.14.5.1.1.1 Test purpose and Environment 3869
A.14.5.1.1.2 Test parameters 3869
A.14.5.1.1.3 Test Requirements 3870
A.14.5.1.2 SA event triggered reporting tests without gap under DRX 3871
A.14.5.1.2.1 Test purpose and Environment 3871
A.14.5.1.2.2 Test parameters 3871
A.14.5.1.2.3 Test Requirements 3872
A.14.5.1.3 SA event triggered reporting tests without gap under non-DRX with SSB index reading 3873
A.14.5.1.3.1 Test purpose and Environment 3873
A.14.5.1.3.2 Test parameters 3873
A.14.5.1.3.3 Test Requirements 3875
A.14.5.1.4 SA event triggered reporting tests with single measurement gap under non-DRX for satellite access 3875
A.14.5.1.4.1 Test purpose and Environment 3875
A.14.5.1.4.2 Test parameters 3875
A.14.5.1.4.3 Test Requirements 3877
A.14.5.1.5 SA event triggered reporting tests with FNO concurrent gaps under DRX for satellite access 3877
A.14.5.1.5.1 Test purpose and Environment 3877
A.14.5.1.5.2 Test parameters 3877
A.15.5.1.5.3 Test Requirements 3879
A.14.5.1.6 SA event triggered reporting tests with PPO concurrent gaps under non-DRX with SSB index reading for satellite access 3880
A.14.5.1.6.1 Test purpose and Environment 3880
A.14.5.1.6.2 Test parameters 3880
A.14.5.1.6.3 Test Requirements 3882
A.14.5.2 Inter-frequency Measurements 3882
A.14.5.2.1 SA event triggered reporting tests for FR1 without SSB time index detection when DRX is not used with single gap for satellite access 3882
A.14.5.2.1.1 Test Purpose and Environment 3882
A.14.5.2.1.2 Test Requirements 3884
A.14.5.2.2 SA event triggered reporting tests for FR1 without SSB time index detection when DRX is used with single gap for satellite access 3884
A.14.5.2.2.1 Test Purpose and Environment 3884
A.14.5.2.2.2 Test Requirements 3887
A.14.5.2.3 SA event triggered reporting tests for FR1 with SSB time index detection when DRX is not used with single gap for satellite access 3887
A.14.5.2.3.1 Test Purpose and Environment 3887
A.14.5.2.3.2 Test Requirements 3890
A.14.5.2.4 SA event triggered reporting tests for FR1 without SSB time index detection when DRX is not used with two gaps in fully non-overlapped for satellite access 3890
A.14.5.2.4.1 Test Purpose and Environment 3890
A.14.5.2.4.2 Test Requirements 3892
A.14.5.2.5 void 3893
A.14.5.2.5.1 void 3893
A.14.5.2.5.2 void 3893

A.14.5.2.6 SA event triggered reporting tests for FR1 without SSB time index detection when DRX is not used with two gaps in partially partial overalpping for satellite access 3893
A.14.5.2.6.1 Test Purpose and Environment 3893
A.14.5.2.6.2 Test Requirements 3895
A.14.5.2.7 Event triggered reporting test without gap under non-DRX 3896
A.14.5.2.7.1 Test purpose and Environment 3896
A.14.5.2.7.2 Test parameters 3896
A.14.5.2.7.3 Test Requirements 3897
A.14.5.2.8 Event triggered reporting tests without gap under DRX 3898
A.14.5.2.8.1 Test purpose and Environment 3898
A.14.5.2.8.2 Test parameters 3898
A.14.5.2.8.3 Test Requirements 3899
A.14.5.3 L1-RSRP measurement for beam reporting for satellite access 3900
A.14.5.3.1 SSB based L1-RSRP measurement for satellite access when DRX is not used 3900
A.14.5.3.1.1 Test Purpose and Environment 3900
A.14.5.3.1.2 Test parameters 3900
A.14.5.3.1.3 Test Requirements 3902
A.14.5.3.2 SSB based L1-RSRP measurement for satellite access when DRX is used 3902
A.14.5.3.2.1 Test Purpose and Environment 3902
A.14.5.3.2.2 Test parameters 3902
A.14.5.3.2.3 Test Requirements 3904
A.14.5.3.3 CSI-RS based L1-RSRP measurement for satellite access when DRX is not used 3904
A.14.5.3.3.1 Test Purpose and Environment 3904
A.14.5.3.3.2 Test parameters 3904
A.14.5.3.3.3 Test Requirements 3906
A.14.5.3.4 CSI-RS based L1-RSRP measurement for satellite access when DRX is used 3906
A.14.5.3.4.1 Test Purpose and Environment 3906
A.14.5.3.4.2 Test parameters 3906
A.14.5.3.4.3 Test Requirements 3908
A.14.6 Measurement Performance requirements 3909
A.14.6.1 SS-RSRP for SAN 3909
A.14.6.1.1 SA: intra-frequency case measurement accuracy with FR1 serving cell and FR1 target cell 3909
A.14.6.1.1.1 Test Purpose and Environment 3909
A.14.6.1.1.2 Test parameters 3909
A.14.6.1.1.3 Test Requirements 3910
A.14.6.1.2 SA inter-frequency case measurement accuracy with FR1 serving cell and FR1 target cell 3910
A.14.6.1.2.1 Test Purpose and Environment 3910
A.14.6.1.2.2 Test parameters 3911
A.14.6.1.2.3 Test Requirements 3912
A.14.6.2 SS-RSRQ 3912
A.14.6.2.1 SA: Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell for satellite access 3912
A.14.6.2.1.1 Test Purpose and Environment 3912
A.14.6.2.1.2 Test Parameters 3912
A.14.6.2.1.3 Test Requirements 3914
A.14.6.2.2 SA Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell for satellite access 3914
A.14.6.2.2.1 Test Purpose and Environment 3914
A.14.6.2.2.2 Test Parameters 3914
A.14.6.2.2.3 Test Requirements 3915
A.14.6.3 SS-SINR 3915
A.14.6.3.1 SA intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell 3915
A.14.6.3.1.1 Test Purpose and Environment 3915
A.14.6.3.1.2 Test Parameters 3916
A.14.6.3.1.3 Test Requirements 3918
A.14.6.3.2 SA Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell 3918
A.14.6.3.2.1 Test Purpose and Environment 3918
A.14.6.3.2.2 Test Parameters 3918
A.14.6.3.2.3 Test Requirements 3921
A.14.6.4 L1-RSRP measurement for beam reporting 3921
A.14.6.4.1 SSB based L1-RSRP measurement 3921
A.14.6.4.1.1 Test Purpose and Environment 3921

A.14.6.4.1.2 Test parameters....3922
A.14.6.4.1.3 Test Requirements....3924
A.14.6.4.2 CSI-RS based L1-RSRP measurement on resource set with repetition off....3924
A.14.6.4.2.1 Test Purpose and Environment....3924
A.14.6.4.2.2 Test parameters....3924
A.14.6.4.2.3 Test Requirements....3926

A.15 NR standalone tests with one or more NR cells in FR2-2....3927
A.15.1 SA: RRC_IDLE state mobility....3927
A.15.1.1 Cell re-selection to NR....3927
A.15.1.1.1 Cell reselection to FR2-2 intra-frequency NR case....3927
A.15.1.1.1.1 Test Purpose and Environment....3927
A.15.1.1.1.2 Test Parameters....3927
A.15.1.1.1.3 Test Requirements....3929
A.15.1.2 Cell reselection to FR2-2 inter-frequency NR case....3930
A.15.1.2.1 Test Purpose and Environment....3930
A.15.1.2.2 Test Parameters....3930
A.15.1.2.3 Test Requirements....3932
A.15.1.3 Cell reselection to FR2-2 intra-frequency NR case for UE fulfilling low mobility relaxed measurement criterion....3933
A.15.1.3.1 Test Purpose and Environment....3933
A.15.1.3.2 Test Parameters....3933
A.15.1.3.3 Test Requirements....3935
A.15.1.4 Cell reselection to FR2-2 intra-frequency NR case for UE fulfilling not-at-cell edge relaxed measurement criterion....3935
A.15.1.4.1 Test Purpose and Environment....3935
A.15.1.4.2 Test Parameters....3935
A.15.1.4.3 Test Requirements....3937
A.15.1.5 Cell reselection to FR2-2 inter-frequency NR case for UE fulfilling low mobility relaxed measurement criterion....3938
A.15.1.5.1 Test Purpose and Environment....3938
A.15.1.5.2 Test Parameters....3938
A.15.1.5.3 Test Requirements....3940
A.15.1.6 Cell reselection to FR2-2 inter-frequency NR case for UE fulfilling not-at-cell edge relaxed measurement criterion....3941
A.15.1.6.1 Test Purpose and Environment....3941
A.15.1.6.2 Test Parameters....3941
A.15.1.6.3 Test Requirements....3943
A.15.2 Signaling characteristics....3944
A.15.2.1 SCell Activation and Deactivation Delay....3944
A.15.2.1.1 SCell Activation and deactivation for SCell in FR2-2 intra-band in non-DRX....3944
A.15.2.1.1.1 Test Purpose and Environment....3944
A.15.2.1.1.2 Test Requirements....3946
A.15.2.1.2 SCell Activation and deactivation for FR1+FR2-2 inter-band with target SCell in FR2-2....3946
A.15.2.1.2.1 Test Purpose and Environment....3946
A.15.2.1.2.2 Test Requirements....3949
A.15.2.1.3 SCell Activation and deactivation for SCell in FR2-2 inter-band in non-DRX....3950
A.15.2.1.3.1 Test Purpose and Environment....3950
A.15.2.1.3.2 Test Requirements....3953
A.15.2.1.4 Direct SCell activation at SCell addition of known SCell in FR2-2....3953
A.15.2.1.4.1 Test Purpose and Environment....3953
A.15.2.1.4.2 Test Requirements....3956
A.15.2.1.5 Direct SCell activation at handover with known SCell in FR2-2....3957
A.15.2.1.5.1 Test Purpose and Environment....3957
A.15.2.1.5.2 Test Requirements....3960
A.15.3 RRC_CONNECTED state mobility....3961
A.15.3.1 Handover....3961
A.15.3.1.1 Intra-frequency handover from FR2-2 carrier with CCA to FR2-2 carrier with CCA; unknown target cell....3961
A.15.3.1.1.1 Test Purpose and Environment....3961
A.15.3.1.1.2 Test Parameters....3961
A.15.3.1.1.3 Test Requirements....3963

A.15.3.1.2 Inter-frequency handover from FR1 to FR2-2 carrier with CCA; unknown target cell 3964
A.15.3.1.2.1 Test Purpose and Environment 3964
A.15.3.1.2.2 Test Parameters 3964
A.15.3.1.2.3 Test Requirements 3966
A.15.4 Measurement procedure 3966
A.15.4.1 Intra-frequency Measurements 3966
A.15.4.1.1 SA event triggered reporting test without gap under non-DRX for FR2-2 with CCA 3966
A.15.4.1.1.1 Test purpose and Environment 3966
A.15.4.1.1.2 Test Requirements 3969
A.15.4.2 Inter-frequency Measurements 3970
A.15.4.2.1 SA event triggered reporting tests for FR2-2 with CCA without SSB time index detection when DRX is not used (PCell in FR2-2) 3970
A.15.4.2.1.1 Test Purpose and Environment 3970
A.15.4.2.1.2 Test Requirements 3973

A.16 NR standalone tests with all NR cells in FR1 for RedCap 3973
A.16.1 SA: RRC_IDLE state mobility for RedCap 3973
A.16.1.1 Cell re-selection to NR 3973
A.16.1.1.1 Cell reselection to FR1 intra-frequency NR case for 1 Rx UE 3973
A.16.1.1.1.1 Test Purpose and Environment 3973
A.16.1.1.1.2 Test Parameters 3973
A.16.1.1.1.3 Test Requirements 3976
A.16.1.1.2 Cell reselection to FR1 intra-frequency NR case for 2 Rx UE 3976
A.16.1.1.2.1 Test Purpose and Environment 3976
A.16.1.1.2.2 Test Parameters 3976
A.16.1.1.2.3 Test Requirements 3978
A.16.1.1.3 Cell reselection to FR1 inter-frequency NR case for 1 Rx UE 3979
A.16.1.1.3.1 Test Purpose and Environment 3979
A.16.1.1.3.2 Test Parameters 3979
A.16.1.1.3.3 Test Requirements 3981
A.16.1.1.4 Cell reselection to FR1 inter-frequency NR case for 2 Rx UE 3982
A.16.1.1.4.1 Test Purpose and Environment 3982
A.16.1.1.4.2 Test Parameters 3982
A.16.1.1.4.3 Test Requirements 3984
A.16.1.1.5 Cell reselection to FR1 intra-frequency NR case for UE fulfilling stationary relaxed measurement criterion for 1 Rx UE 3985
A.16.1.1.5.1 Test Purpose and Environment 3985
A.16.1.1.5.2 Test Parameters 3985
A.16.1.1.5.3 Test Requirements 3988
A.16.1.1.6 Cell reselection to FR1 intra-frequency NR case for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE 3988
A.16.1.1.6.1 Test Purpose and Environment 3988
A.16.1.1.6.2 Test Parameters 3988
A.16.1.1.6.3 Test Requirements 3991
A.16.1.1.7 Cell reselection to FR1 inter-frequency NR case for UE fulfilling stationary relaxed measurement criterion for 1 Rx UE 3991
A.16.1.1.7.1 Test Purpose and Environment 3991
A.16.1.1.7.2 Test Parameters 3991
A.16.1.1.7.3 Test Requirements 3996
A.16.1.1.8 Cell reselection to FR1 inter-frequency NR case for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE 3996
A.16.1.1.8.1 Test Purpose and Environment 3996
A.16.1.1.8.2 Test Parameters 3997
A.16.1.1.8.3 Test Requirements 4001
A.16.1.2 Inter-RAT E-UTRAN cell re-selection for RedCap 4002
A.16.1.2.1 Cell reselection to higher priority E-UTRAN for 1RX 4002
A.16.1.2.1.1 Test Purpose and Environment 4002
A.16.1.2.1.2 Test Parameters 4002
A.16.1.2.1.3 Test Requirements 4005
A.16.1.2.2 Cell reselection to higher priority E-UTRAN for 2RX 4005
A.16.1.2.2.1 Test Purpose and Environment 4005
A.16.1.2.2.2 Test Parameters 4005

A.16.1.2.2.3 Test Requirements 4008
A.16.1.2.3.1 Test Purpose and Environment 4009
A. 16.1.2.3.2 Test Parameters 4009
A.16.1.2.3.3 Test Requirements 4011
A.16.1.2.4.1 Test Purpose and Environment 4012
A.16.1.2.4.2 Test Parameters 4012
A.16.1.3.1.3 Test Requirements 4015
A.16.1.2.5 Cell reselection to lower priority E-UTRAN for UE fulfilling stationary relaxed measurement criterion for 1 Rx UE 4015
A.16.1.2.5.1 Test Purpose and Environment 4015
A.16.1.2.5.2 Test Parameters 4015
A.16.1.2.5.3 Test Requirements 4018
A.16.1.2.6 Cell reselection to lower priority E-UTRAN for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE 4019
A.16.1.2.6.1 Test Purpose and Environment 4019
A.16.1.2.6.2 Test Parameters 4019
A.16.1.2.6.3 Test Requirements 4022
A.16.2 SA: RRC_INACTIVE state mobility for RedCap 4022
A.16.2.1 Configured Grant based Small Data Transmissions (CG-SDT) for RedCap 4022
A.16.2.1.1 NR UE CG-SDT Test in FR1 for 1Rx RedCap UE 4022
A.16.2.1.1.1 Test purpose and Environment 4022
A.16.2.1.1.2 Test Parameters 4023
A.16.2.1.1.3 Test requirements 4025
A.16.2.1.2 NR UE CG-SDT Test in FR1 for 2Rx RedCap UE 4025
A.16.2.1.2.1 Test purpose and Environment 4025
A.16.2.1.2.2 Test Parameters 4026
A.16.2.1.2.3 Test requirements 4028
A.16.3 RRC_CONNECTED state mobility for RedCap 4028
A.16.3.1 Handover 4028
A.16.3.1.1 Intra-frequency handover from FR1 to FR1; known target cell for 1 Rx UE 4028
A.16.3.1.1.1 Test Purpose and Environment 4028
A.16.3.1.1.2 Test Parameters 4028
A.16.3.1.1.3 Test Requirements 4030
A.16.3.1.2 Intra-frequency handover from FR1 to FR1; known target cell for 2 Rx UE 4031
A.16.3.1.2.1 Test Purpose and Environment 4031
A.16.3.1.2.2 Test Parameters 4031
A.16.3.1.2.3 Test Requirements 4033
A.16.3.1.3 Intra-frequency handover from FR1 to FR1; unknown target cell for 1 Rx UE 4033
A.16.3.1.3.1 Test Purpose and Environment 4033
A.16.3.1.3.2 Test Parameters 4033
A.16.3.1.3.3 Test Requirements 4035
A.16.3.1.4 Intra-frequency handover from FR1 to FR1; unknown target cell for 2 Rx UE 4036
A.16.3.1.4.1 Test Purpose and Environment 4036
A.16.3.1.4.2 Test Parameters 4036
A.16.3.1.5 Inter-frequency handover from FR1 to FR1; unknown target cell for 1 Rx UE 4038
A.16.3.1.5.1 Test Purpose and Environment 4038
A.16.3.1.5.2 Test Parameters 4038
A.16.3.1.5.3 Test Requirements 4040
A.16.3.1.6 Inter-frequency handover from FR1 to FR1; unknown target cell for 2 Rx UE 4041
A.16.3.1.6.1 Test Purpose and Environment 4041
A.16.3.1.6.2 Test Parameters 4041
A.16.3.1.6.3 Test Requirements 4043
A.16.3.1.7 SA NR - E-UTRAN handover for 1Rx UE 4043
A.16.3.1.7.1 Test Purpose and Environment 4043
A.16.3.1.7.2 Test Requirements 4047
A.16.3.1.8 SA NR - E-UTRAN handover for 2Rx UE 4047
A.16.3.1.8.1 Test Purpose and Environment 4047
A.16.3.1.8.2 Test Requirements 4051
A.16.3.1.9 SA NR - E-UTRAN handover with unknown target cell for 1 Rx UE 4051
A.16.3.1.9.1 Test Purpose and Environment 4051
A.16.3.1.9.2 Test Requirements 4055
A.16.3.1.10 SA NR - E-UTRAN handover with unknown target cell for 2 Rx UE 4055

A.16.3.1.10.1 Test Purpose and Environment 4055
A.16.3.1.10.2 Test Requirements 4058
A.16.3.2 RRC Connection Mobility Control 4059
A.16.3.2.1 SA: RRC Re-establishment 4059
A.16.3.2.1.1 Intra-frequency RRC Re-establishment in FR1 for 1 Rx UE 4059
A.16.3.2.1.2 Intra-frequency RRC Re-establishment in FR1 for 2 Rx UE 4062
A.16.3.2.1.3 Inter-frequency RRC Re-establishment in FR1 for 1 Rx UE 4065
A.16.3.2.1.4 Inter-frequency RRC Re-establishment in FR1 for 2 Rx UE 4068
A.16.3.2.1.5 Intra-frequency RRC Re-establishment in FR1 for 1 Rx UE without serving cell timing 4071
A.16.3.2.1.6 Intra-frequency RRC Re-establishment in FR1 for 2 Rx UE without serving cell timing 4074
A.16.3.2.2 Random Access 4077
A.16.3.2.2.1 4-step RA type contention based random access test in FR1 for NR standalone for 1 Rx UE 4077
A.16.3.2.2.2 4-step RA type contention based random access test in FR1 for NR standalone for 2 Rx UE 4081
A.16.3.2.2.3 4-step RA type non-contention based random access test in FR1 for NR standalone for 1 Rx UE 4084
A.16.3.2.2.5 2-step RA type contention based random access test in FR1 for NR standalone for 1 Rx UE 4091
A.16.3.2.2.6 2-step RA type contention based random access test in FR1 for NR standalone for 2 Rx UE 4094
A.16.3.2.2.7 2-step RA type non-contention based test in FR1 for NR standalone for 1 RX UE 4097
A.16.3.2.2.8 2-step RA type non-contention based test in FR1 for NR standalone for 2 RX UE 4100
A.16.3.2.3 SA: RRC Connection Release with Redirection 4102
A.16.3.2.3.1 Redirection from NR in FR1 to NR in FR1 for 1 Rx UE 4102
A.16.3.2.3.2 Redirection from NR in FR1 to NR in FR1 for 2 Rx UE 4105
A.16.3.2.3.3 Redirection from NR in FR1 to E-UTRAN for 1 Rx UE 4108
A.16.3.2.3.4 Redirection from NR in FR1 to E-UTRAN for 2 Rx UE 4111
A.16.4 Timing for RedCap 4115
A.16.4.1 UE transmit timing 4115
A.16.4.1.1 NR UE Transmit Timing Test for FR1 for 1Rx RedCap UE 4115
A.16.4.1.1.1 Test Purpose and environment 4115
A.16.4.1.1.2 Test requirements 4117
A.16.4.1.2 NR UE Transmit Timing Test for FR1 for 2Rx RedCap UE 4117
A.16.4.1.2.1 Test Purpose and environment 4117
A.16.4.1.2.2 Test requirements 4119
A.16.4.2 UE timer accuracy 4119
A.16.4.3 Timing advance 4119
A.16.4.3.1 SA FR1 timing advance adjustment accuracy for 1 Rx UE 4119
A.16.4.3.1.1 Test Purpose and Environment 4119
A.16.4.3.1.2 Test Parameters 4119
A.16.4.3.1.3 Test Requirements 4122
A.16.4.3.2 SA FR1 timing advance adjustment accuracy for 2 Rx UE 4122
A.16.4.3.2.1 Test Purpose and Environment 4122
A.16.4.3.2.2 Test Parameters 4122
A.16.4.3.2.3 Test Requirements 4125
A.16.5 Signalling characteristics for RedCap 4125
A.16.5.1 Radio link Monitoring 4125
A.16.5.1.1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode for 1 Rx UE 4125
A.16.5.1.1.1 Test Purpose and Environment 4125
A.16.5.1.1.2 Test Requirements 4129
A.16.5.1.2 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode for 2 Rx UE 4129
A.16.5.1.2.1 Test Purpose and Environment 4129
A.16.5.1.2.2 Test Requirements 4132
A.16.5.1.3 Radio Link Monitoring In-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode for 1 Rx UE 4132
A.16.5.1.3.1 Test Purpose and Environment 4132
A.16.5.1.3.2 Test Requirements 4136
A.16.5.1.4 Radio Link Monitoring In-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode for 2 Rx UE 4136
A.16.5.1.4.1 Test Purpose and Environment 4136
A.16.5.1.4.2 Test Requirements 4140
A.16.5.1.5 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode for 1 Rx UE 4140

A.16.5.1.5.1 Test Purpose and Environment 4140
A.16.5.1.5.2 Test Requirements 4143
A.16.5.1.6 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode for 2 Rx UE 4144
A.16.5.1.6.1 Test Purpose and Environment 4144
A.16.5.1.6.2 Test Requirements 4147
A.16.5.1.7 Radio Link Monitoring In-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode for 1 Rx UE 4147
A.16.5.1.7.1 Test Purpose and Environment 4147
A.16.5.1.7.2 Test Requirements 4150
A.16.5.1.8 Radio Link Monitoring In-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode for 2 Rx UE 4151
A.16.5.1.8.1 Test Purpose and Environment 4151
A.16.5.1.8.2 Test Requirements 4154
A.16.5.1.9 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode for 1 Rx UE 4154
A.16.5.1.9.1 Test Purpose and Environment 4154
A.16.5.1.9.2 Test Requirements 4157
A.16.5.1.10 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode for 2 Rx UE 4158
A.16.5.1.10.1 Test Purpose and Environment 4158
A.16.5.1.10.2 Test Requirements 4161
A.16.5.1.11 Radio Link Monitoring In-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode for 1 Rx UE 4161
A.16.5.1.11.1 Test Purpose and Environment 4161
A.16.5.1.11.2 Test Requirements 4165
A.16.5.1.12 Radio Link Monitoring In-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode for 2 Rx UE 4165
A.16.5.1.12.1 Test Purpose and Environment 4165
A.16.5.1.12.2 Test Requirements 4168
A.16.5.1.13 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in DRX mode for 1 Rx UE 4168
A.16.5.1.13.1 Test Purpose and Environment 4168
A.16.5.1.13.2 Test Requirements 4171
A.16.5.1.14 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in DRX mode for 2 Rx UE 4172
A.16.5.1.14.1 Test Purpose and Environment 4172
A.16.5.1.14.2 Test Requirements 4174
A.16.5.1.15 Radio Link Monitoring In-sync Test for FR1 PCell configured with CSI-RS-based RLM in DRX mode for 1 Rx UE 4175
A.16.5.1.15.1 Test Purpose and Environment 4175
A.16.5.1.15.2 Test Requirements 4178
A.16.5.1.16 Radio Link Monitoring In-sync Test for FR1 PCell configured with CSI-RS-based RLM in DRX mode for 2 Rx UE 4179
A.16.5.1.16.1 Test Purpose and Environment 4179
A.16.5.1.16.2 Test Requirements 4182
A.16.5.2 Beam Failure Detection and Link recovery procedures 4182
A.16.5.2.1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in non-DRX mode for 1 Rx UE 4182
A.16.5.2.1.1 Test Purpose and Environment 4182
A.16.5.2.1.2 Test Requirements 4186
A.16.5.2.2 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in non-DRX mode for 2 Rx UE 4186
A.16.5.2.2.1 Test Purpose and Environment 4186
A.16.5.2.2.2 Test Requirements 4190
A.16.5.2.3 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in DRX mode for 1 Rx UE 4191
A.16.5.2.3.1 Test Purpose and Environment 4191
A.16.5.2.3.2 Test Requirements 4195
A.16.5.2.4 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in DRX mode for 2 Rx UE 4195
A.16.5.2.4.1 Test Purpose and Environment 4195

A.16.5.2.4.2 Test Requirements 4199
A.16.5.2.5 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with CSI-RS-based BFD and LR in non-DRX mode for 1 Rx UE 4199
A.16.5.2.5.1 Test Purpose and Environment 4199
A.16.5.2.5.2 Test Requirements 4203
A.16.5.2.6 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with CSI-RS-based BFD and LR in non-DRX mode for 2 Rx UE 4203
A.16.5.2.6.1 Test Purpose and Environment 4203
A.16.5.2.6.2 Test Requirements 4207
A.16.5.2.7 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with CSI-RS-based BFD and LR in DRX mode for 1 Rx UE 4207
A.16.5.2.7.1 Test Purpose and Environment 4207
A.16.5.2.7.2 Test Requirements 4211
A.16.5.2.8 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with CSI-RS-based BFD and LR in DRX mode for 2 Rx UE 4211
A.16.5.2.8.1 Test Purpose and Environment 4211
A.16.5.2.8.2 Test Requirements 4215
A.16.5.3 Active BWP switch 4215
A.16.5.3.1 DCI-based and Timer-based Active BWP Switch 4215
A.16.5.3.1.1 NR FR1 DL active BWP switch with non-DRX in SA for 1 Rx UE 4215
A.16.5.3.1.1.1 Test Purpose and Environment 4215
A.16.5.3.1.1.2 Test Requirements 4218
A.16.5.3.1.2 NR FR1 DL active BWP switch with non-DRX in SA for 2 Rx UE 4219
A.16.5.3.1.1.2 Test Purpose and Environment 4219
A.16.5.3.1.2.2 Test Requirements 4221
A.16.5.3.2 RRC-based Active BWP Switch 4222
A.16.5.3.2.1 NR FR1 DL active BWP switch of Cell with non-DRX in SA for 1 Rx UE 4222
A.16.5.3.2.1.1 Test Purpose and Environment 4222
A.16.5.3.2.1.2 Test Requirements 4224
A.16.5.3.2.2 NR FR1 DL active BWP switch of Cell with non-DRX in SA for 2 Rx UE 4225
A.16.5.3.2.2.1 Test Purpose and Environment 4225
A.16.5.3.2.2.2 Test Requirements 4227
A.16.5.4 UE specific CBW change 4228
A.16.5.4.1 UE specific CBW change on PCell in FR1 in non-DRX for 1 Rx UE 4228
A.16.5.4.1.1 Test Purpose and Environment 4228
A.16.5.4.1.2 Test Requirements 4230
A.16.5.4.2 UE specific CBW change on PCell in FR1 in non-DRX for 2 Rx UE 4230
A.16.5.4.2.1 Test Purpose and Environment 4230
A.16.5.4.2.2 Test Requirements 4233
A.16.6 Measurement procedure for RedCap 4233
A.16.6.1 Intra-frequency Measurements 4233
A.16.6.1.1 SA event triggered reporting tests without gap under non-DRX for 1 Rx UE 4233
A.16.6.1.1.1 Test purpose and Environment 4233
A.16.6.1.1.2 Test parameters 4234
A.16.6.1.1.3 Test Requirements 4236
A.16.6.1.2 SA event triggered reporting tests without gap under non-DRX for 2 Rx UE 4236
A.16.6.1.2.1 Test purpose and Environment 4236
A.16.6.1.2.2 Test parameters 4236
A.16.6.1.2.3 Test Requirements 4238
A.16.6.1.3 SA event triggered reporting tests without gap under DRX for 1 Rx UE 4238
A.16.6.1.3.1 Test purpose and Environment 4238
A.16.6.1.3.2 Test parameters 4238
A.16.6.1.3.3 Test Requirements 4241
A.16.6.1.4 SA event triggered reporting tests without gap under DRX for 2 Rx UE 4241
A.16.6.1.4.1 Test purpose and Environment 4241
A.16.6.1.4.2 Test parameters 4241
A.16.6.1.4.3 Test Requirements 4243
A.16.6.1.5 SA event triggered reporting tests with per-UE gaps under non-DRX for 1 Rx UE 4243
A.16.6.1.5.1 Test purpose and Environment 4243
A.16.6.1.5.2 Test parameters 4243
A.16.6.1.5.3 Test Requirements 4246
A.16.6.1.6 SA event triggered reporting tests with per-UE gaps under non-DRX for 2 Rx UE 4246

A.16.6.1.6.1 Test purpose and Environment 4246
A.16.6.1.6.2 Test parameters....4246
A.16.6.1.6.3 Test Requirements 4248
A.16.6.1.7 SA event triggered reporting tests with per-UE gaps under DRX for 1 Rx UE 4249
A.16.6.1.7.1 Test purpose and Environment 4249
A.16.6.1.7.2 Test parameters....4249
A.16.6.1.7.3 Test Requirements 4251
A.16.6.1.8 SA event triggered reporting tests with per-UE gaps under DRX for 2 Rx UE 4251
A.16.6.1.8.1 Test purpose and Environment 4251
A.16.6.1.8.2 Test parameters....4251
A.16.6.1.8.3 Test Requirements 4254
A.16.6.1.9 SA event triggered reporting tests without gap under non-DRX with SSB index reading for 1 Rx UE 4254
A.16.6.1.9.1 Test purpose and Environment 4254
A.16.6.1.9.2 Test parameters....4254
A.16.6.1.9.3 Test Requirements 4256
A.16.6.1.10 SA event triggered reporting tests without gap under non-DRX with SSB index reading for 2 Rx UE 4256
A.16.6.1.10.1 Test purpose and Environment 4256
A.16.6.1.10.2 Test parameters....4256
A.16.6.1.10.3 Test Requirements 4258
A.16.6.1.11 SA event triggered reporting tests with per-UE gaps under non-DRX with SSB index reading for 1 Rx UE....4258
A.16.6.1.11.1 Test purpose and Environment 4258
A.16.6.1.11.2 Test parameters....4258
A.16.6.1.11.3 Test Requirements 4260
A.16.6.1.12 SA event triggered reporting tests with per-UE gaps under non-DRX with SSB index reading for 2 Rx UE....4260
A.16.6.1.12.1 Test purpose and Environment 4260
A.16.6.1.12.2 Test parameters....4260
A.16.6.1.12.3 Test Requirements 4262
A.16.6.2 Inter-frequency Measurements 4262
A.16.6.2.1 SA event triggered reporting tests for FR1 without SSB time index detection when DRX is used for 1 Rx UE 4262
A.16.6.2.1.1 Test Purpose and Environment....4262
A.16.6.2.1.2 Test Requirements 4266
A.16.6.2.2 SA event triggered reporting tests for FR1 without SSB time index detection when DRX is used for 2 Rx UE 4266
A.16.6.2.2.1 Test Purpose and Environment....4266
A.16.6.2.2.2 Test Requirements 4269
A.16.6.2.3 SA event triggered reporting tests for FR1 without SSB time index detection when DRX is used for 1 Rx UE 4270
A.16.6.2.3.1 Test Purpose and Environment....4270
A.16.6.2.3.2 Test Requirements 4273
A.16.6.2.4 SA event triggered reporting tests for FR1 without SSB time index detection when DRX is used for 2 Rx UE 4273
A.16.6.2.4.1 Test Purpose and Environment....4273
A.16.6.2.4.2 Test Requirements 4276
A.16.6.2.5 SA event triggered reporting tests for FR1 with SSB time index detection when DRX is not used for 1 Rx UE 4276
A.16.6.2.6 SA event triggered reporting tests for FR1 with SSB time index detection when DRX is not used for 2 Rx UE 4277
A.16.6.2.7 SA event triggered reporting tests for FR1 with SSB time index detection when DRX is used for 1 Rx UE....4277
A.16.6.2.7.1 Test Purpose and Environment....4277
A.16.6.2.7.2 Test Requirements 4279
A.16.6.2.8 SA event triggered reporting tests for FR1 with SSB time index detection when DRX is used for 2 Rx UE....4280
A.16.6.2.8.1 Test Purpose and Environment....4280
A.16.6.2.8.2 Test Requirements 4283
A.16.6.2.9 SA event triggered reporting tests with additional mandatory gap pattern for 1 Rx UE....4283
A.16.6.2.9.1 Test Purpose and Environment....4283

A.16.6.2.9.2 Test Requirements 4286
A.16.6.2.10 SA event triggered reporting tests with additional mandatory gap pattern for 2 Rx UE 4286
A.16.6.2.10.1 Test Purpose and Environment 4286
A.16.6.2.10.2 Test Requirements 4289
A.16.6.2.11 SA event triggered reporting tests for FR1 when DRX is used for 1 Rx UE 4289
A.16.6.2.11.1 Test Purpose and Environment 4289
A.16.6.2.11.2 Test Requirements 4292
A.16.6.2.12 SA event triggered reporting tests for FR1 when DRX is used for 2 Rx UE 4293
A.16.6.2.12.1 Test Purpose and Environment 4293
A.16.6.2.12.2 Test Requirements 4295
A.16.6.3 Inter-RAT Measurements 4296
A.16.6.3.1 SA NR - E-UTRAN event-triggered reporting in non-DRX in FR1 for 1 Rx UE 4296
A.16.6.3.1.1 Test purpose and Environment 4296
A.16.6.3.1.2 Test Requirements 4299
A.16.6.3.2 SA NR - E-UTRAN event-triggered reporting in non-DRX in FR1 for 2 Rx UE 4300
A.16.6.3.2.1 Test purpose and Environment 4300
A.16.6.3.2.2 Test Requirements 4303
A.16.6.3.3 SA NR - E-UTRAN event-triggered reporting in DRX in FR1 for 1 Rx UE 4304
A.16.6.3.3.1 Test purpose and Environment 4304
A.16.6.3.3.2 Test Requirements 4307
A.16.6.3.4 SA NR - E-UTRAN event-triggered reporting in DRX in FR1 for 2 Rx UE 4308
A.16.6.3.4.1 Test purpose and Environment 4308
A.16.6.3.4.2 Test Requirements 4311
A.16.6.4 L1-RSRP measurement for beam reporting 4312
A.16.6.4.1 SSB based L1-RSRP measurement when DRX is not used for 1 Rx UE 4312
A.16.6.4.1.1 Test Purpose and Environment 4312
A.16.6.4.1.2 Test parameters 4312
A.16.6.4.1.3 Test Requirements 4314
A.16.6.4.2 SSB based L1-RSRP measurement when DRX is not used for 2 Rx UE 4314
A.16.6.4.2.1 Test Purpose and Environment 4314
A.16.6.4.2.2 Test parameters 4314
A.16.6.4.2.3 Test Requirements 4316
A.16.6.4.3 SSB based L1-RSRP measurement when DRX is used for 1 Rx UE 4316
A.16.6.4.3.1 Test Purpose and Environment 4316
A.16.6.4.3.2 Test parameters 4316
A.16.6.4.3.3 Test Requirements 4318
A.16.6.4.4 SSB based L1-RSRP measurement when DRX is used for 2 Rx UE 4318
A.16.6.4.4.1 Test Purpose and Environment 4318
A.16.6.4.4.2 Test parameters 4319
A.16.6.4.4.3 Test Requirements 4320
A.16.6.4.5 CSI-RS based L1-RSRP measurement when DRX is not used for 1 Rx UE 4321
A.16.6.4.5.1 Test Purpose and Environment 4321
A.16.6.4.5.2 Test parameters 4321
A.16.6.4.5.3 Test Requirements 4323
A.16.6.4.6 CSI-RS based L1-RSRP measurement when DRX is not used for 2 Rx UE 4323
A.16.6.4.6.1 Test Purpose and Environment 4323
A.16.6.4.6.2 Test parameters 4323
A.16.6.4.6.3 Test Requirements 4325
A.16.6.4.7 CSI-RS based L1-RSRP measurement when DRX is used for 1 Rx UE 4325
A.16.6.4.7.1 Test Purpose and Environment 4325
A.16.6.4.7.2 Test parameters 4326
A.16.6.4.7.3 Test Requirements 4327
A.16.6.4.8 CSI-RS based L1-RSRP measurement when DRX is used for 2 Rx UE 4328
A.16.6.4.8.1 Test Purpose and Environment 4328
A.16.6.4.8.2 Test parameters 4328
A.16.6.4.8.3 Test Requirements 4330
A.16.6.7 NR measurements with autonomous gaps 4330
A.16.6.7.1 SA intra-frequency CGI identification of NR neighbor cell in FR1 for 1 Rx UE 4330
A.16.6.7.1.1 Test Purpose and Environment 4330
A.16.6.7.1.2 Test Parameters 4330
A.16.6.7.1.3 Test Requirements 4332
A.16.6.7.2 SA intra-frequency CGI identification of NR neighbor cell in FR1 for 2 Rx UE 4332

A.16.6.7.2.1 Test Purpose and Environment 4332
A.16.6.7.2.2 Test Parameters 4333
A.16.6.7.2.3 Test Requirements 4335
A.16.6.7.3 Identification of a new CGI of inter-RAT E-UTRA cell using autonomous gaps in NR SA for 1 Rx UE 4335
A.16.6.7.3.1 Test Purpose and Environment 4335
A.16.6.7.3.2 Test Requirements 4338
A.16.6.7.4 Identification of a new CGI of inter-RAT E-UTRA cell using autonomous gaps in NR SA for 2 Rx UE 4339
A.16.6.7.4.1 Test Purpose and Environment 4339
A.16.6.7.4.2 Test Requirements 4342
A.16.7 Measurement Performance requirements for RedCap 4343
A.16.7.1 SS-RSRP 4343
A.16.7.1.1 SA: intra-frequency case measurement accuracy with FR1 serving cell and FR1 target cell for 1 Rx UE 4343
A.16.7.1.1.1 Test Purpose and Environment 4343
A.16.7.1.1.2 Test parameters 4343
A.16.7.1.1.3 Test Requirements 4346
A.16.7.1.2 SA: intra-frequency case measurement accuracy with FR1 serving cell and FR1 target cell for 2Rx UE 4346
A.16.7.1.2.1 Test Purpose and Environment 4346
A.16.7.1.2.2 Test parameters 4347
A.16.7.1.2.3 Test Requirements 4350
A.16.7.1.3 SA inter-frequency case measurement accuracy with FR1 serving cell and FR1 target cell for 1 Rx UE 4350
A.16.7.1.3.1 Test Purpose and Environment 4350
A.16.7.1.3.2 Test parameters 4350
A.16.7.1.3.3 Test Requirements 4353
A.16.7.1.4 SA inter-frequency case measurement accuracy with FR1 serving cell and FR1 target cell for 2 Rx UE 4353
A.16.7.1.4.1 Test Purpose and Environment 4353
A.16.7.1.4.2 Test parameters 4354
A.16.7.1.4.3 Test Requirements 4357
A.16.7.2 SS-RSRQ 4357
A.16.7.2.1 SA: Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell for 1 Rx UE 4357
A.16.7.2.1.1 Test Purpose and Environment 4357
A.16.7.2.1.2 Test Parameters 4357
A.16.7.2.1.3 Test Requirements 4360
A.16.7.2.2 SA: Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell for 2 Rx UE 4361
A.16.7.2.2.1 Test Purpose and Environment 4361
A.16.7.2.2.2 Test Parameters 4361
A.16.7.2.2.3 Test Requirements 4364
A.16.7.2.3 SA Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell for 1 Rx UE 4364
A.16.7.2.3.1 Test Purpose and Environment 4364
A.16.7.2.3.2 Test parameters 4364
A.16.7.2.3.3 Test Requirements 4368
A.16.7.2.4 SA Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell for 2 Rx UE 4369
A.16.7.2.4.1 Test Purpose and Environment 4369
A.16.7.2.4.2 Test parameters 4369
A.16.7.2.4.3 Test Requirements 4373
A.16.7.3 SS-SINR 4373
A.16.7.3.1 SA intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell for 1 Rx UE 4373
A.16.7.3.1.1 Test Purpose and Environment 4373
A.16.7.3.1.2 Test parameters 4373
A.16.7.3.1.3 Test Requirements 4376
A.16.7.3.2 SA intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell for 2 Rx UE 4376

A.16.7.3.2.1 Test Purpose and Environment 4376
A.16.7.3.2.2 Test parameters 4376
A.16.7.3.3 SA Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell for 1 Rx UE 4379
A.16.7.3.3.1 Test Purpose and Environment 4379
A.16.7.3.3.2 Test parameters 4380
A.16.7.3.3.3 Test Requirements 4383
A.16.7.3.4 SA Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell for 2 Rx UE 4383
A.16.7.3.4.1 Test Purpose and Environment 4383
A.16.7.3.4.2 Test parameters 4383
A.16.7.3.4.3 Test Requirements 4386
A.16.7.4 L1-RSRP measurement for beam reporting 4387
A.16.7.4.1 SSB based L1-RSRP measurement for 1 Rx UE 4387
A.16.7.4.2 SSB based L1-RSRP measurement for 2 Rx UE 4387
A.16.7.4.3 CSI-RS based L1-RSRP measurement on resource set with repetition off for 1 Rx UE 4387
A.16.7.4.4 CSI-RS based L1-RSRP measurement on resource set with repetition off for 2 Rx UE 4387
A.16.7.5 E-UTRAN RSRP 4387
A.16.7.5.1 SA: inter-RAT measurement accuracy with FR1 serving cell for 1 Rx UE 4387
A.16.7.5.1.1 Test Purpose and Environment 4387
A.16.7.5.1.2 Test parameters 4387
A.16.7.5.1.3 Test Requirements 4390
A.16.7.5.2 SA: inter-RAT measurement accuracy with FR1 serving cell for 2 Rx UE 4391
A.16.7.5.2.1 Test Purpose and Environment 4391
A.16.7.5.2.2 Test parameters 4391
A.16.7.5.2.3 Test Requirements 4394
A.16.7.6 E-UTRAN RSRQ 4394
A.16.7.6.1 SA: inter-RAT measurement accuracy with FR1 serving cell for 1 Rx UE 4394
A.16.7.6.1.1 Test Purpose and Environment 4394
A.16.7.6.1.2 Test parameters 4394
A.16.7.6.1.3 Test Requirements 4398
A.16.7.6.2 SA: inter-RAT measurement accuracy with FR1 serving cell for 2 Rx UE 4398
A.16.7.6.2.1 Test Purpose and Environment 4398
A.16.7.6.2.2 Test parameters 4398
A.16.7.6.2.3 Test Requirements 4402
A.16.7.7 E-UTRAN RS-SINR 4402
A.16.7.7.1 SA: inter-RAT measurement accuracy with FR1 serving cell for 1 Rx UE 4402
A.16.7.7.2 SA: inter-RAT measurement accuracy with FR1 serving cell for 2 Rx UE 4402

A.17 NR standalone tests with one or more NR cells in FR2 for RedCap 4403
A.17.1 SA: RRC_IDLE state mobility for RedCap 4403
A.17.1.1 Cell re-selection to NR 4403
A.17.1.1.1 Cell reselection to FR2 intra-frequency NR case for 2 Rx 4403
A.17.1.1.1.1 Test Purpose and Environment 4403
A.17.1.1.1.2 Test Parameters 4403
A.17.1.1.1.3 Test Requirements 4405
A.17.1.1.2 Cell reselection to FR2 inter-frequency NR case 4406
A.17.1.1.2.1 Test Purpose and Environment 4406
A.17.1.1.2.2 Test Parameters 4406
A.17.1.1.2.3 Test Requirements 4408
A.17.1.1.3 Cell reselection to FR2 intra-frequency NR case for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE 4408
A.17.1.1.3.1 Test Purpose and Environment 4408
A.17.1.1.3.2 Test Parameters 4409
A.17.1.1.3.3 Test Requirements 4410
A.17.1.1.4 Cell reselection to FR2 inter-frequency NR case for UE fulfilling stationary mobility relaxed measurement criterion for 2 Rx UE 4411
A.17.1.1.4.1 Test Purpose and Environment 4411
A.17.1.1.4.2 Test Parameters 4411
A.17.1.1.4.3 Test Requirements 4413
A.17.2 SA: RRC_INACTIVE state mobility for RedCap 4414
A.17.2.1 Configured Grant based Small Data Transmissions (CG-SDT) for RedCap 4414

A.17.2.1.1 TA validation for CG-SDT in FR2 for RedCap 4414
A.17.2.1.1.1 Test Purpose and Environment 4414
A.17.2.1.1.2 Test Requirements 4416
A.17.3 RRC_CONNECTED state mobility for RedCap 4416
A.17.3.1 Handover for RedCap 4416
A.17.3.1.1 Intra-frequency handover from FR2 to FR2; unknown target cell for 2 Rx 4416
A.17.3.1.1.1 Test Purpose and Environment 4416
A.17.3.1.1.2 Test Parameters 4416
A.17.3.1.1.3 Test Requirements 4418
A.17.3.1.2 Inter-frequency handover from FR2 to FR2; unknown target cell for 2 Rx 4418
A.17.3.1.2.1 Test Purpose and Environment 4418
A.17.3.1.2.2 Test Parameters 4418
A.17.3.1.2.3 Test Requirements 4420
A.17.3.2 RRC Connection Mobility Control for RedCap 4420
A.17.3.2.1 SA: RRC Re-establishment 4420
A.17.3.2.1.1 Intra-frequency RRC Re-establishment in FR2 4420
A.17.3.2.1.1.1 Test Purpose and Environment 4420
A.17.3.2.1.2 Inter-frequency RRC Re-establishment in FR2 4423
A.17.3.2.1.2.1 Test Purpose and Environment 4423
A.17.3.2.1.3 Intra-frequency RRC Re-establishment in FR2 without serving cell timing 4425
A.17.3.2.1.3.1 Test Purpose and Environment 4425
A.17.3.2.1.3.2 Test Requirements 4427
A.17.3.2.2 Random Access 4428
A.17.3.2.2.1 4-step RA type contention based random access test in FR2 for NR Standalone 4428
A.17.3.2.2.1.1 Test Purpose and Environment 4428
A.17.3.2.2.1.2 Test Requirements 4429
A.17.3.2.2.2 4-step RA type non-contention based random access test in FR2 for NR Standalone 4431
A.17.3.2.2.2.1 Test Purpose and Environment 4431
A.17.3.2.2.2.2 Test Requirements 4433
A.17.3.2.2.3 2-step RA type contention based random access test in FR2 for NR Standalone 4434
A.17.3.2.2.3.1 Test Purpose and Environment 4434
A.17.3.2.2.3.2 Test Requirements 4436
A.17.3.2.2.4 2-step RA type non-contention based random access test in FR2 for NR Standalone 4437
A.17.3.2.2.4.1 Test Purpose and Environment 4437
A.17.3.2.2.4.2 Test Requirements 4439
A.17.3.2.3 SA: RRC Connection Release with Redirection 4440
A.17.3.2.3.1 Redirection from NR in FR2 to NR in FR2 4440
A.17.3.2.3.1.1 Test Purpose and Environment 4440
A.17.3.2.3.1.2 Test Parameters 4440
A.17.3.2.3.1.3 Test Requirements 4442
A.17.4 Timing 4442
A.17.4.1 UE transmit timing 4442
A.17.4.1.1 NR UE Transmit Timing Test for FR2 4442
A.17.4.1.1.1 Test Purpose and environment 4442
A.17.4.1.1.2 Test requirements 4445
A.17.4.2 UE timer accuracy 4445
A.17.4.3 Timing advance 4445
A.17.4.3.1 SA FR2 timing advance adjustment accuracy 4445
A.17.4.3.1.1 Test Purpose and Environment 4445
A.17.4.3.1.2 Test Parameters 4445
A.17.4.3.1.3 Test Requirements 4448
A.17.4.2 UE timer accuracy 4448
A.17.4.3 Timing advance 4448
A.17.4.3.1 SA FR2 timing advance adjustment accuracy 4448
A.17.5 Signaling characteristics for RedCap 4448
A.17.5.1 Radio link Monitoring for RedCap 4448
A.17.5.1.1 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with SSB-based RLM RS in non-DRX mode 4448
A.17.5.1.1.1 Test Purpose and Environment 4448
A.17.5.1.1.2 Test Requirements 4451
A.17.5.1.2 Radio Link Monitoring In-sync Test for FR2 PCell configured with SSB-based RLM RS in non-DRX mode 4452

A.17.5.1.2.1 Test Purpose and Environment 4452
A.17.5.1.2.2 Test Requirements 4455
A.17.5.1.3 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with SSB-based RLM RS in DRX mode 4455
A.17.5.1.4 Radio Link Monitoring In-sync Test for FR2 PCell configured with SSB-based RLM RS in DRX mode 4455
A.17.5.1.4.1 Test Purpose and Environment 4455
A.17.5.1.4.2 Test Requirements 4458
A.17.5.1.5 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with CSI-RS-based RLM in non-DRX mode 4458
A.17.5.1.5.1 Test Purpose and Environment 4458
A.17.5.1.5.2 Test Requirements 4461
A.17.5.1.6 Radio Link Monitoring In-sync Test for FR2 PCell configured with CSI-RS-based RLM in non-DRX mode 4461
A.17.5.1.6.1 Test Purpose and Environment 4461
A.17.5.1.6.2 Test Requirements 4464
A.17.5.1.7 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with CSI-RS-based RLM in DRX mode 4464
A.17.5.1.7.1 Test Purpose and Environment 4464
A.17.5.1.7.2 Test Requirements 4467
A.17.5.1.8 Radio Link Monitoring In-sync Test for FR2 PCell configured with CSI-RS-based RLM in DRX mode 4468
A.17.5.1.8.1 Test Purpose and Environment 4468
A.17.5.1.8.2 Test Requirements 4471
A.17.5.1.9 UE Radio Link Monitoring Scheduling Restrictions on FR2 4471
A.17.5.1.9.1 Test Purpose and Environment 4471
A.17.5.1.9.2 Test Requirements 4473
A.17.5.2 Beam Failure Detection and Link recovery procedures 4473
A.17.5.2.1 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with SSB-based BFD and LR in non-DRX mode 4473
A.17.5.2.2 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with SSB-based BFD and LR in DRX mode 4473
A.17.5.2.3 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with CSI-RS-based BFD and LR in non-DRX mode 4473
A.17.5.2.3.1 Test Purpose and Environment 4473
A.17.5.2.3.2 Test Requirements 4476
A.17.5.2.4 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with CSI-RS-based BFD and LR in DRX mode 4477
A.17.5.2.4.1 Test Purpose and Environment 4477
A.17.5.2.4.2 Test Requirements 4480
A.17.5.2.5 Scheduling availability restriction during Beam Failure Detection and Link Recovery for FR2 PCell configured with SSB-based BFD and LR in non-DRX mode for 2 Rx UE 4480
A.17.5.2.5.1 Test Purpose and Environment 4480
A.17.5.2.5.2 Test Requirements 4484
A.17.5.3 Active BWP switch for RedCap 4484
A.17.5.3.1 DCI-based and Timer-based Active BWP Switch 4484
A.17.5.3.1.1 NR FR2 DL active BWP switch with non-DRX in SA 4484
A.17.5.3.1.1.1 Test Purpose and Environment 4484
A.17.5.3.1.1.2 Test Requirements 4486
A.17.5.3.2 RRC-based Active BWP Switch 4487
A.17.5.3.2.1 NR FR2 DL active BWP switch of PCell with non-DRX in SA 4487
A.17.5.3.2.1.1 Test Purpose and Environment 4487
A.17.5.3.2.1.2 Test Requirements 4490
A.17.5.4 Active TCI state switch delay 4490
A.17.5.4.1 MAC-CE based active TCI state switch 4490
A.17.5.4.1.1 NR PCell FR2 active TCI state switch for a known TCI state 4490
A.17.5.4.1.1.1 Test Purpose and Environment 4490
A.17.5.4.1.1.2 Test Requirements 4493
A.17.5.4.2 RRC based active TCI state switch 4493
A.17.5.4.2.1 NR PCell FR2 active TCI state switch for a known TCI state 4493
A.17.5.4.2.1.1 Test Purpose and Environment 4493
A.17.5.4.2.1.2 Test Requirements 4497

A.17.5.5 Uplink spatial relation switch delay 4497
A.17.5.5.1 MAC-CE based Spatial Relation switch 4497
A.17.5.5.1.1 NR PCell FR2 spatial relation associated with known DL-RS 4497
A.17.5.5.1.1.1 Test Purpose and Environment 4497
A.17.5.5.1.1.2 Test Requirements 4500
A.17.5.5.2 RRC based spatial relation switch 4500
A.17.5.5.2.1 NR PCell FR2 spatial relation switch associated with a known DL-RS 4500
A.17.5.5.2.1.2 Test Requirements 4502
A.17.5.6 UE specific CBW change 4502
A.17.5.6.1 NR FR2 UE specific CBW change of PCell with non-DRX in SA 4502
A.17.5.6.1.1 Test Purpose and Environment 4502
A.17.5.6.1.2 Test Requirements 4505
A.17.6 Measurement procedure for RedCap 4505
A.17.6.1 Intra-frequency Measurements 4505
A.17.6.1.1 SA event triggered reporting test without gap under non-DRX 4505
A.17.6.1.1.1 Test purpose and Environment 4505
A.17.6.1.1.2 Test Requirements 4508
A.17.6.1.2 SA event triggered reporting test without gap under DRX 4508
A.17.6.1.2.1 Test purpose and Environment 4508
A.7.6.1.2.2 Test Requirements 4509
A.17.6.1.3 SA event triggered reporting test with per-UE gaps under non-DRX 4509
A.17.6.1.3.1 Test purpose and Environment 4509
A.17.6.1.3.2 Test Requirements 4512
A.17.6.1.4 SA event triggered reporting test with per-UE gaps under DRX 4512
A.17.6.1.4.1 Test purpose and Environment 4512
A.17.6.1.4.2 Test Requirements 4515
A.17.6.2 Inter-frequency Measurements 4515
A.17.6.2.1 SA event triggered reporting tests For FR2 without SSB time index detection when DRX is not used (PCell in FR2) 4515
A.17.6.2.1.1 Test Purpose and Environment 4515
A.17.6.2.1.2 Test Requirements 4518
A.17.6.2.2 SA event triggered reporting tests For FR2 without SSB time index detection when DRX is used (PCell in FR2) 4518
A.17.6.2.2.1 Test Purpose and Environment 4518
A.17.6.2.2.2 Test Requirements 4521
A.17.6.2.3 SA event triggered reporting tests For FR2 with SSB time index detection when DRX is not used (PCell in FR2) 4521
A.17.6.2.3.1 Test Purpose and Environment 4521
A.17.6.2.3.2 Test Requirements 4524
A.17.6.2.4 SA event triggered reporting tests For FR2 with SSB time index detection when DRX is used (PCell in FR2) for 2 RX UE 4524
A.17.6.2.4.1 Test Purpose and Environment 4524
A.17.6.2.4.2 Test Requirements 4527
A.17.6.3 L1-RSRP measurement for beam reporting 4527
A.17.6.3.1 SSB based L1-RSRP measurement when DRX is not used 4527
A.17.6.3.1.1 Test Purpose and Environment 4527
A.17.6.3.1.2 Test parameters 4527
A.17.6.3.1.3 Test Requirements 4527
A.17.6.3.2 SSB based L1-RSRP measurement when DRX is used 4528
A.17.6.3.2.1 Test Purpose and Environment 4528
A.17.6.3.2.2 Test parameters 4528
A.17.6.3.2.3 Test Requirements 4530
A.17.6.3.3 CSI-RS based L1-RSRP measurement when DRX is not used 4530
A.17.6.3.3.1 Test Purpose and Environment 4530
A.17.6.3.3.2 Test parameters 4530
A.17.6.3.3.3 Test Requirements 4532
A.17.6.3.4 CSI-RS based L1-RSRP measurement when DRX is used 4532
A.17.6.3.4.1 Test Purpose and Environment 4532
A.17.6.3.4.2 Test parameters 4532
A.7.6.3.3.3 Test Requirements 4534
A.17.6.4.1 SA interfrequency CGI reporting in autonomous gaps test (PCell in FR2) for 2 RX UE 4535
A.17.6.4.1.1 Test Purpose and Environment 4535

A.17.6.4.1.2 Test Requirements 4537
A.17.7 Measurement Performance requirements 4538
A.17.7.1 SS-RSRP 4538
A.17.7.1.1 SA intra-frequency case measurement accuracy with FR2 serving cell and FR2 target cell 4538
A.17.7.1.1.1 Test Purpose and Environment 4538
A.17.7.1.1.2 Test parameters 4538
A.17.7.1.1.3 Test Requirements 4540
A.17.7.1.2 SA inter-frequency case measurement accuracy with FR2 serving cell and FR2 target cell 4541
A.17.7.1.2.1 Test Purpose and Environment 4541
A.17.7.1.2.2 Test parameters 4541
A.17.7.1.2.3 Test Requirements 4543
A.17.7.2 SS-RSRQ 4544
A.17.7.2.1 SA intra-frequency measurement accuracy with FR2 serving cell and FR2 target cell 4544
A.17.7.2.1.1 Test Purpose and Environment 4544
A.17.7.2.1.2 Test Parameters 4544
A.17.7.2.1.3 Test Requirements 4546
A.17.7.2.2 SA Inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell for 2 Rx UE 4546
A.17.7.2.2.1 Test Purpose and Environment 4546
A.17.7.2.2.2 Test parameters 4546
A.17.7.2.2.3 Test Requirements 4548
A.17.7.2.3 SA Inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell 4548
A.17.7.3 L1-RSRP measurement for beam reporting 4548
A.17.7.3.1 SSB based L1-RSRP measurement 4548
A.17.7.3.1.1 Test Purpose and Environment 4548
A.17.7.3.1.2 Test parameters 4548
A.17.7.3.1.3 Test Requirements 4548
A.17.7.3.2 CSI-RS based L1-RSRP measurement on resource set with repetition off 4549
A.17.7.3.2.1 Test Purpose and Environment 4549
A.17.7.3.2.2 Test parameters 4549
A.17.7.3.2.3 Test Requirements 4549
A.17.7.4 SS-SINR 4550
A.17.7.4 SA intra-frequency case measurement accuracy with FR2 serving cell and FR2 target cell for 2Rx UE 4550
A.17.7.4.1.1 Test Purpose and Environment 4550
A.17.7.4.1.2 Test parameters 4550
A.17.7.4.1.3 Test Requirements 4552

A.18 E-UTRA standalone tests for NR RRM for RedCap 4552
A.18.1 RRC_IDLE state mobility 4552
A.18.1.1 Inter-RAT NR Cell re-selection 4552
A.18.1.1.1 E-UTRA Cell reselection to higher priority NR target Cell in FR1 4552
A.18.1.1.1.1 Test Purpose and Environment 4552
A.18.2.1.1.2 Test Requirements 4555
A.18.2 RRC_CONNECTED state mobility 4556
A.18.2.1 Handover 4556
A.18.2.1.1 E-UTRAN - NR handover in FR1 4556
A.18.2.1.1.1 Test Purpose and Environment 4556
A.18.2.1.1.2 Test Requirements 4559
A.18.2.2 RRC connection release with redirection 4560
A.18.2.2.1 Redirection from E-UTRA to NR FR1 for redcap UE 4560
A.18.2.2.1.1 Test Purpose and Environment 4560
A.18.2.2.1.2 Test Parameters 4560
A.18.2.2.1.3 Test Requirements 4563
A.18.3 Measurement procedure 4564
A.18.3.1 E-UTRA – NR Inter-RAT Measurements 4564
A.18.3.1.1 NR Inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is not used 4564
A.18.3.1.1.1 Test Purpose and Environment 4564
A.18.3.1.1.2 Test Requirements 4567
A.18.3.1.2 NR Inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is used 4568

A.18.3.1.2.1 Test Purpose and Environment 4568
A.18.3.1.2.2 Test Requirements 4571
A.18.3.1.3 NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is not used 4572
A.18.3.1.3.1 Test Purpose and Environment 4572
A.18.3.1.3.2 Test Requirements 4576
A.18.3.1.4 NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is used 4576
A.18.3.1.4.1 Test Purpose and Environment 4576
A.18.3.1.4.2 Test Requirements 4580
A.18.3.1.5 NR Inter-RAT event triggered reporting tests for FR2 without SSB time index detection when DRX is not used 4580
A.18.3.1.5.1 Test Purpose and Environment 4580
A.18.3.1.5.2 Test Requirements 4582
A.18.3.1.6 NR Inter-RAT event triggered reporting tests for FR2 without SSB time index detection when DRX is used 4583
A.18.3.1.6.1 Test Purpose and Environment 4583
A.18.3.1.6.2 Test Requirements 4585
A.18.3.1.7 NR Inter-RAT event triggered reporting tests for FR2 with SSB time index detection when DRX is not used 4586
A.18.3.1.7.1 Test Purpose and Environment 4586
A.18.3.1.7.2 Test Requirements 4588
A.18.3.1.8 NR Inter-RAT event triggered reporting tests for FR2 with SSB time index detection when DRX is used 4588
A.18.3.1.8.1 Test Purpose and Environment 4588
A.18.3.1.8.2 Test Requirements 4590

Annex B (normative): Conditions for RRM requirements applicability for operating bands .4592

B.1 Conditions for NR RRC_IDLE state mobility 4592
B.1.1 Introduction 4592
B.1.2 Conditions for measurements on NR intra-frequency cells for cell re-selection 4592
B.1.3 Conditions for measurements on NR inter-frequency cells for cell re-selection 4593
B.1.4 Conditions for measurements on NR intra-frequency cells for cell re-selection for RedCap 4593
B.1.5 Conditions for measurements on NR inter-frequency cells for cell re-selection for RedCap 4595
B.1.6 Conditions for measurements on NR intra-frequency cells for cell re-selection for satellite access 4595
B.1.7 Conditions for measurements on NR inter-frequency cells for cell re-selection for satellite access 4595

B.2 Conditions for UE measurements procedures and performance requirements in RRC_CONNECTED state 4595
B.2.1 Introduction 4595
B.2.1.1 General 4595
B.2.1.2 Derivation of Minimum SSB_RP values for FR1 4596
B.2.1.3 Derivation of Minimum SSB_RP values for FR2 4596
B.2.1.3.1 Minimum SSB_RP values for Rx Beam Peak angle of arrival 4596
B.2.1.3.2 Minimum SSB_RP values for angle of arrival within Spherical coverage 4597
B.2.1.4 Gain to SS-RSRP and CSI-RSRP measurement point for FR1 4597
B.2.1.5 Gain to SS-RSRP and CSI-RSRP measurement point for FR2 4597
B.2.1.5.1 Gain to SS-RSRP and CSI-RSRP measurement point for Rx Beam Peak angle of arrival 4597
B.2.1.5.2 Gain to SS-RSRP measurement point for different frequency 4598
B.2.1.5.3 Alignment of Rough beam to Rx beam Peak 4598
B.2.1.6 Gain to PRS-RSRP measurement point for FR2 4599
B.2.1.6.1 Gain to PRS-RSRP measurement point for Rx Beam Peak angle of arrival 4599
B.2.2 Conditions for NR intra-frequency measurements 4599
B.2.3 Conditions for NR inter-frequency measurements 4600
B.2.4 Conditions for NR L1-RSRP reporting 4601
B.2.4.1 Conditions for SSB based L1-RSRP reporting 4601
B.2.4.2 Conditions for CSI-RS based L1-RSRP reporting 4602
B.2.5 Conditions for RRC connection release with redirection to NR 4603
B.2.6 Void 4604
B.2.6.1 Void 4604
B.2.6.2 Void 4605

B.2.7 Conditions for SRS-RSRP measurements 4605
B.2.8 Conditions for NR L1-SINR reporting 4605
B.2.8.1 Conditions for L1-SINR reporting with CSI-RS based CMR and no dedicated IMR configured 4605
B.2.8.2 Conditions for L1-SINR reporting with SSB based CMR and dedicated IMR configured 4606
B.2.8.2.1 L1-SINR reporting with SSB based CMR and dedicated ZP-IMR configured 4606
B.2.8.2.2 L1-SINR reporting with SSB based CMR and dedicated NZP-IMR configured 4607
B.2.8.3 Conditions for L1-SINR reporting with CSI-RS based CMR and dedicated IMR configured 4608
B.2.8.3.1 L1-SINR reporting with CSI-RS based CMR and dedicated ZP-IMR configured 4608
B.2.8.3.2 L1-SINR reporting with CSI-RS based CMR and dedicated NZP-IMR configured 4609
B.2.9 Conditions for NR intra-frequency measurements under CCA 4610
B.2.10 Conditions for NR inter-frequency measurements under CCA 4611
B.2.11 Conditions for NR L1-RSRP reporting under CCA 4611
B.2.11.1 Conditions for SSB based L1-RSRP reporting 4611
B.2.12 Conditions for NR CSI-RS based intra-frequency measurements 4611
B.2.13 Conditions for NR CSI-RS based inter-frequency measurements 4612
B.2.14 Conditions for NR PRS-based measurements 4614
B.2.15 Conditions for NR intra-frequency measurements 4615
B.2.16 Conditions for NR inter-frequency measurements 4617
B.2.17 Conditions for NR intra-frequency measurements for satellite access 4618
B.2.18 Conditions for NR inter-frequency measurements for satellite access 4618
B.2.19 Conditions for NR L1-RSRP reporting for satellite access 4619
B.2.19.1 Conditions for SSB based L1-RSRP reporting for satellite access 4619
B.2.19.2 Conditions for CSI-RS based L1-RSRP reporting for satellite access 4619
B.2.20 Conditions for RRC connection release with redirection to NR for satellite access 4619

B.3 RRM Requirements Exceptions 4620
B.3.1 Introduction 4620
B.3.2 Receiver sensitivity relaxation for CA 4620
B.3.2.1 Receiver sensitivity relaxation for UE supporting CA in FR1 4620
B.3.2.2 Receiver sensitivity relaxation for UE configured with CA in FR1 4620
B.3.2.2.1 Inter-band carrier aggregation 4620
B.3.2.2.2 Reference sensitivity exceptions due to UL harmonic interference for CA 4620
B.3.2.2.3 Reference sensitivity exceptions due to intermodulation interference due to 2UL CA 4620
B.3.2.3 Receiver sensitivity relaxation for UE supporting CA in FR2 4621
B.3.2.4 Receiver sensitivity relaxation for UE configured with CA in FR2 4621
B.3.2.4.1 Intra-band contiguous carrier aggregation 4621
B.3.2.4.2 Intra-band non-contiguous carrier aggregation 4621
B.3.3 Receiver sensitivity relaxation for DC 4621
B.3.3.1 Receiver sensitivity relaxation for EN-DC 4621
B.3.3.2 Receiver sensitivity relaxation for NE-DC 4621
B.3.4 Receiver sensitivity relaxation for SUL 4621
B.3.4.1 Receiver sensitivity relaxation for UE supporting SUL in FR1 4621
B.3.4.2 Receiver sensitivity relaxation for UE configured with SUL in FR1 4621
B.3.4.2.1 Reference sensitivity exceptions due to UL harmonic interference for SUL 4621

B.4 Conditions for V2X 4622
B.4.1 Test parameters for GNSS signals 4622
B.4.2 Conditions for PSBCH-RSRP Accuracy Requirements 4622
B.4.3 Conditions for Selection/Reselection to Intra-frequency SyncRef UE 4622
B.4.4 Conditions for L1 SL-RSRP Accuracy Requirements 4623

B.5 High level test procedure for SAN RRM tests 4623

Annex C (informative): Change history 4624

History 4646

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

x the first digit:

1 presented to TSG for information;

2 presented to TSG for approval;

3 or greater indicates TSG approved document under change control.

y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.

z the third digit is incremented when editorial only changes have been incorporated in the document.

In the present document, modal verbs have the following meanings:

shall indicates a mandatory requirement to do something

shall not indicates an interdiction (prohibition) to do something

The constructions "shall" and "shall not" are confined to the context of normative provisions, and do not appear in Technical Reports.

The constructions "must" and "must not" are not used as substitutes for "shall" and "shall not". Their use is avoided insofar as possible, and they are not used in a normative context except in a direct citation from an external, referenced, non-3GPP document, or so as to maintain continuity of style when extending or modifying the provisions of such a referenced document.

should indicates a recommendation to do something

should not indicates a recommendation not to do something

may indicates permission to do something

need not indicates permission not to do something

The construction "may not" is ambiguous and is not used in normative elements. The unambiguous constructions "might not" or "shall not" are used instead, depending upon the meaning intended.

can indicates that something is possible

cannot indicates that something is impossible

The constructions "can" and "cannot" are not substitutes for "may" and "need not".

will indicates that something is certain or expected to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document

will not indicates that something is certain or expected not to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document

might indicates a likelihood that something will happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

might not indicates a likelihood that something will not happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

In addition:

is (or any other verb in the indicative mood) indicates a statement of fact

is not (or any other negative verb in the indicative mood) indicates a statement of fact

The constructions "is" and "is not" do not indicate requirements.

1 Scope

The present document specifies requirements for support of Radio Resource Management for the FDD and TDD modes of New Radio (NR). These requirements include requirements on measurements in NR and the UE as well as requirements on node dynamical behaviour and interaction, in terms of delay and response characteristics.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document.*

[1] 3GPP TS 38.304: "NR; User Equipment (UE) procedures in idle mode".

[2] 3GPP TS 38.331: "NR; Radio Resource Control (RRC); Protocol specification".

[3] 3GPP TS 38.213: "NR; Physical layer procedures for control".

[4] 3GPP TS 38.215: "NR; Physical layer measurements".

[5] 3GPP TS 38.533: "NR; User Equipment (UE) conformance specification; Radio Resource Management (RRM)".

[6] 3GPP TS 38.211: "NR; Physical channels and modulation”.

[7] 3GPP TS 38.321: "NR; Medium Access Control (MAC) protocol specification".

[8] 3GPP TS 38.212 "NR; Multiplexing and channel coding".

[9] 3GPP TS 38.202: "NR; Physical layer services provided by the physical layer".

[10] 3GPP TS 38.300: "NR; Overall description; Stage-2".

[11] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".

[12] 3GPP TS 38.423: "NG-RAN; Xn Application Protocol (XnAP)".

[13] 3GPP TS 38.104: "NR; Base Station (BS) radio transmission and reception".

[14] 3GPP TS 38.306: "NR; User Equipment (UE) radio access capabilities".

[15] 3GPP TS 36.133: "Evolved Universal Terrestrial Radio Access (E-UTRA); Requirements for support of radio resource management".

[16] 3GPP TS 36.331: "Evolved Universal Terrestrial Radio Access (E-UTRA); Radio Resource Control (RRC) protocol specification".

[17] 3GPP TS 37.340: "Evolved Universal Terrestrial Radio Access (E-UTRA) and NR; Multi-connectivity", Stage 2.

[18] 3GPP TS 38.101-1: "NR; User Equipment (UE) radio transmission and reception; Part 1: Range 1 Standalone".

[19] 3GPP TS 38.101-2: "NR; User Equipment (UE) radio transmission and reception; Part 2: Range 2 Standalone".

[20] 3GPP TS 38.101-3: "NR; User Equipment (UE) radio transmission and reception; Part 3: Range 1 and Range 2 Interworking operation with other radios".

[21] 3GPP TS 38.101-4: "NR; User Equipment (UE) radio transmission and reception; Part 4: Performance requirements".

[22] 3GPP TS 38.305: "NG Radio Access Network (NG-RAN); Stage 2 functional specification of User Equipment (UE) positioning in NG-RAN".

[23] 3GPP TS 36.211: "Evolved Universal Terrestrial Radio Access (E-UTRA); Physical Channels and Modulation".

[24] 3GPP TS 36.300: "Evolved Universal Terrestrial Radio Access (E-UTRA); Overall description".

[25] 3GPP TS 36.101: "Technical Specification Group Radio Access Network; Evolved Universal Terrestrial Radio Access (E-UTRA); User Equipment (UE) radio transmission and reception".

[26] 3GPP TS 38.214: "NR; Physical layer procedures for data".

[27] 3GPP TS 36.355: "Evolved Universal Terrestrial Radio Access (E-UTRA); LTE Positioning Protocol (LPP)".

[28] Void.

[29] 3GPP TS 25.133: "Requirements for Support of Radio Resource Management (FDD)".

[30] 3GPP TS 25.302: "Services provided by the Physical Layer".

[31] 3GPP TS 37.320: "Universal Terrestrial Radio Access (UTRA), Evolved Universal Terrestrial Radio Access (E-UTRA) and Next Generation Radio Access; Radio measurement collection for Minimization of Drive Tests (MDT); Overall description; Stage 2".

[32] 3GPP TS 25.214: "Physical layer procedures (FDD)".

[33] 3GPP TS 37.213: "Physical layer procedures for shared spectrum channel access"

[34] 3GPP TS 37.355: "LTE Positioning Protocol (LPP) ".

[35] 3GPP TS 38.455 : "NG-RAN; NR Positioning Protocol A (NRPPa) ".

[36] 3GPP TS 37.106: “User Equipment (UE) requirements for shared spectrum channel access”.

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in TR 21.905 [11] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in TR 21.905 [11].

1 Rx RedCap: RedCap UE for which requirements are derived assuming 1 Rx branch.

2 Rx RedCap: RedCap UE for which requirements are derived assuming 2 Rx branches.

Active DL BWP: Active DL bandwidth part as defined in TS 38.213 [3].

Blackbox Approach: Testing methodology, in which the UE internal implementation of certain specific UE functionality involved in the test, is unknown.

CD-SSB: Cell defining SSB as defined in TS 38.300 [10].

Control Resource Set: As defined in TS 38.213 [3].

DL BWP: DL bandwidth part as defined in TS 38.213 [3].

EN-DC: E-UTRA-NR Dual Connectivity as defined in clause 4.1.2 of TS 37.340 [17].

en-gNB: As defined in TS 37.340 [17].

FR1: Frequency range 1 as defined in clause 5.1 of TS 38.104 [13].

FR2: Frequency range 2 as defined in clause 5.1 of TS 38.104 [13].

gNB: as defined in TS 38.300 [10].

IBM (Independent Beam Management): As defined in TS 38.101-2 [19].

LMF: as defined in TS 38.305 [22].

Master Cell Group: As defined in TS 38.331 [2].

Multi-Radio Dual Connectivity: Dual Connectivity between E-UTRA and NR nodes, or between two NR nodes, as defined in TS 37.340 [17].

NCD-SSB: Non cell defining SSB as defined in TS 38.300 [10].

ng-eNB: As defined in TS 38.300 [10].

NE-DC: NR-E-UTRA Dual Connectivity as defined in clause 4.1.3.2 of TS 37.340 [17].

NGEN-DC: NG-RAN E-UTRA-NR Dual Connectivity as defined in clause 4.1.3.1 of TS 37.340 [17].

NR-DC: NR-NR Dual Connectivity as defined in clause 4.1.3.3 of TS 37.340 [17].

Primary Cell: As defined in TS 38.331 [2].

PRS resource instance: An instance in time of a configured PRS resource as defined in TS 38.331 [2], which may or not overlap with a measurement gap occasion.

Quasi Co-Location: As defined in TS 38.214 [26].

RedCap UE: A UE with reduced capabilities as defined in clause 4.2 in TS 38.306 [14].

RLM-RS resource: A resource out of the set of resources configured for RLM by higher layer parameter RLM-RS-List [2] as defined in TS 38.213 [3].

SA operation mode: Operation mode when the UE is configured with at least PCell and not any MR-DC.

Secondary Cell: As defined in TS 38.331 [2].

Secondary Cell Group: As defined in TS 38.331 [2].

Serving Cell: As defined in TS 38.331 [2].

SMTC: An SSB-based measurement timing configuration configured by *SSB-MeasurementTimingConfiguration* as specified in TS 38.331 [2].

Special Cell: As defined in TS 38.331 [2].

SSB: SS/PBCH block as defined in clause 7.8.3 of TS 38.211 [6].

Timing Advance Group: As defined in TS 38.331 [2].

3.2 Symbols

For the purposes of the present document, the following symbols apply:

$BW_{Channel}$	Channel bandwidth, defined in TS 38.101-1, 38.101-2 and 38.101-3 subclause 3.2
$\hat{E}_s$	Received energy per RE (power normalized to the subcarrier spacing) during the useful part of the symbol, i.e. excluding the cyclic prefix, at the UE antenna connector or radiated interface boundary
F_C	*RF reference frequency* on the channel raster, given in table 5.4.2.2-1 in TS 38.101-1 and 38.101-2

$F_{C,low}$ The Fc of the lowest carrier, expressed in MHz

Io The total received power density, including signal and interference, as measured at the UE antenna connector or radiated interface boundary.

Ioc The power spectral density (integrated in a noise bandwidth equal to the chip rate and normalized to the chip rate) of a band limited noise source (simulating interference from cells, which are not defined in a test procedure) as measured at the UE antenna connector or radiated interface boundary.

Iot The received power spectral density of the total noise and interference for a certain RE (power integrated over the RE and normalized to the subcarrier spacing) as measured at the UE antenna connector or radiated interface boundary

N_{oc} The power spectral density of a white noise source (average power per RE normalised to the subcarrier spacing), simulating interference from cells that are not defined in a test procedure, as measured at the UE antenna connector or radiated interface boundary

n_{PRB} Physical Resource Block number as defined in clause 3.2 in TS 38.211.

N_{TA} Timing offset between uplink and downlink radio frames at the UE, as defined in clause 4.2 in TS 38.213.

$N_{TA\ offset}$ Fixed timing advance offset, as defined in clause 7.1.2 in TS 38.133.

P_{CMAX} Configured UE transmitted power as defined in clause 6.2.4 in TS 38.101-1, 38-101-2 and 38.101-3.

$P_{CMAX,c}$ Configured UE transmitted power on a serving cell *c* as defined in clause 6.2.4 in TS 38.101-1, 38-101-2 and 38.101-3

S Cell Selection Criterion defined in TS 38.304, subclause 5.2.3.2 for NR

SSB_RP Received (linear) average power of the resource elements that carry NR synchronisation burst, measured at the UE antenna connector or radiated interface boundary

Srxlev Cell selection RX level, defined in TS 38.304, subclause 5.2.3.2

Squal Cell selection quality, defined in TS 38.304, subclause 5.2.3.2

Sintrasearch Defined in TS 38.304 , subclause 5.2.4.7 for E-UTRAN amd 38.304 subclause 5.2.4.7 for NR

Snonintrasearch Defined in TS 38.304 , subclause 5.2.4.7

$Thresh_{x, high}$ Defined in TS 38.304 , subclause 5.2.4.7

$Thresh_{x, low}$ Defined in TS 38.304 , subclause 5.2.4.7

$Thresh_{serving, low}$ Defined in TS 38.304 , subclause 5.2.4.7

$T_{RE-ESTABLISH-REQ}$ The RRC Re-establishment delay requirement, the time between the moment when erroneous CRCs are applied, to when the UE starts to send preambles on the PRACH.

T_c Basic time unit, defined in clause 4.1 of TS 38.211 [6].

T_s Reference time unit, defined in clause 4.1 of TS 38.211 [6].

$T_{reselection}$ Defined in TS 25.304, subclause 5.2.6.1.5

$T_{reselectionRAT}$ Defined in TS 36.304 , subclause 5.2.4.7

$T_{reselectionEUTRA}$ Defined in TS 36.304 , subclause 5.2.4.7

$T_{reselectionUTRA}$ Defined in TS 36.304 , subclause 5.2.4.7

$T_{reselectionGERAN}$ Defined in TS 36.304 , subclause 5.2.4.

$Thresh_{x, high}$ Defined in TS 38.304 , subclause 5.2.4.7

$Thresh_{x, low}$ Defined in TS 38.304 , subclause 5.2.4.7

$Thresh_{serving, low}$ Defined in TS 38.304 , subclause 5.2.4.7

$T_{UE_re\text{-}establish_delay}$ Time between the moments when any of the conditions requiring RRC re-establishment as defined in clause 5.3.7 in TS 38.331 [2] is detected by the UE and when the UE sends PRACH to the target PCell.

3.3 Abbreviations

For the purposes of the present document, the abbreviations given in TR 21.905 [11] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in TR 21.905 [11].

AoA Angle of Arrival

AoD Angle of Departure

BFD Beam Failure Detection

BFD-RS BFD Reference Signal

BLER Block Error Rate

BM-RS	Beam Management Reference Signal
BWP	Bandwidth Part
CA	Carrier Aggregation
CBD	Candidate Beam Detection
CBW	Channel Bandwidth
CC	Component Carrier
CCA	Clear Channel Assessment
CG-SDT	Configured Grant Small Data Transmisison
CLI	Cross Link Interference
CMR	Channel Measurement Resource
CORESET	Control Resource Set
CP	Cyclic Prefix
CSI	Channel-State Information
CSI-RS	CSI Reference Signal
CSI-RSRP	CSI Reference Signal based Reference Signal Received Power
CSI-RSRQ	CSI Reference Signal based Reference Signal Received Quality
CSI-SINR	CSI Reference Signal based Signal to Noise and Interference Ratio
CSI_RP	Received (linear) average power of the resource elements that carry NR CSI-RS signals and channels, measured at the UE antenna connector
DBT	Discovery Burst Transmission
DC	Dual Connectivity
DCI	Downlink Control Information
DL	Downlink
DL-AoD	Downlink Angle-of-Departure
DL-TDOA	Downlink Time Difference Of Arrival
DMRS	Demodulation Reference Signal
DRX	Discontinuous Reception
E-CID	Enhanced Cell ID
E-UTRA	Evolved UTRA
E-UTRAN	Evolved UTRAN
EN-DC	E-UTRA-NR Dual Connectivity
FDD	Frequency Division Duplex
FR	Frequency Range
GEO	Geostationary Earth Orbit
HARQ	Hybrid Automatic Repeat Request
HO	Handover
GAP	Refers to any of Measurement Gap, activated Pre-MG and NCSG
IMR	Interference Measurement Resource
L1-RSRP	Layer 1 RSRP
L1 SL-RSRP	Layer 1 Sidelink RSRP which corresponds to PSCCH-RSRP and/or PSSCH-RSRP
LEO	Low Earth Orbit
LMF	Location Management Function
LPP	LTE Positioning Protocol
MAC	Medium Access Control
MCG	Master Cell Group
MDT	Minimization of Drive Tests
MG	Measurement Gap
MGL	Measurement Gap Length
MGRP	Measurement Gap Repetition Period
MIB	Master Information Block
ML	Measurement Length
MN	Master Node
MR-DC	Multi-Radio Dual Connectivity
MUSIM	Multi-Universal Subscriber Identity Module
NCSG	Network Controlled Small Gap
NE-DC	NR-E-UTRA Dual Connectivity
NGEN-DC	NG-RAN E-UTRA-NR Dual Connectivity
NR	New Radio
NR-DC	NR-NR Dual Connectivity
NTN	Non-Terrestrial Network
OFDM	Orthogonal Frequency Division Multiplexing
OFDMA	Orthogonal Frequency Division Multiple Access

OTDOA	Observed Time Difference Of Arrival
PBCH	Physical Broadcast Channel
PCC	Primary Component Carrier
PCell	Primary Cell
PDCCH	Physical Downlink Control Channel
PDSCH	Physical Downlink Shared Channel
PLMN	Public Land Mobile Network
PRACH	Physical RACH
Pre-MG	Pre-configured Measurement Gap
PRP	PRS Received Power
PRS	Positioning Reference Signal
PRS-RSRP	Positioning Reference Signal based Reference Signal Received Power
PPW	PRS Processing Window
PSBCH	Physical Sidelink Broadcast Channel
PSBCH-RSRP	Physical Sidelink Broadcast Channel DMRS based Reference Signal Received Power
PSCCH	Physical Sidelink Control Channel
PSCCH-RSRP	Physical Sidelink Control Channel DMRS based Reference Signal Received Power
PSCell	Primary SCell
PSS	Primary Synchronization Signal
PSSCH	Physical Sidelink Shared Channel
PSSCH-RSRP	Physical Sidelink Shared Channel DMRS based Reference Signal Received Power
pTAG	Primary Timing Advance Group
PUCCH	Physical Uplink Control Channel
PUSCH	Physical Uplink Shared Channel
QCL	Quasi Co-Location
RACH	Random Access Channel
RAT	Radio Access Technology
RLM	Radio Link Monitoring
RLM-RS	Reference Signal for RLM
RMSI	Remaining Minimum System Information
RRC	Radio Resource Control
RRH	Remote Radio Head
RRM	Radio Resource Management
RSSI	Received Signal Strength Indicator
RSRP	Reference Signal Received Power
RSRQ	Reference Signal Received Quality
RSTD	Reference Signal Time Difference
RTT	Round Trip Time
S-SSB	Sidelink Synchronization Signal Block
SSB_RP	Received (linear) average power of the resource elements that carry NR SSB signals and channels, measured at the UE antenna connector or radiated interface boundary.
SA	Standalone operation mode
SAB	Satellite access band
SAN	Satellite Access Node
SCC	Secondary Component Carrier
SCell	Secondary Cell
SCG	Secondary Cell Group
SCS	Subcarrier Spacing
SCS_{SSB}	SSB subcarrier spacing
SDL	Supplementary Downlink
SDT	Small Data Transmission
SFN	System Frame Number
SFTD	SFN and Frame Timing DifferenceSI System Information
SIB	System Information Block
SL-RSSI	Sidelink Received Signal Strength Indicator
SLSS	Sidelink Synchronization Signal
SMTC	SSB-based Measurement Timing configuration
SpCell	Special Cell

SRS	Sounding Reference Signal
SRS-RSRP	Sounding Reference Signal based Reference Signal Received Power
SS-RSRP	Synchronization Signal based Reference Signal Received Power
SS-RSRQ	Synchronization Signal based Reference Signal Received Quality
SS-SINR	Synchronization Signal based Signal to Noise and Interference Ratio
SSB	Synchronization Signal Block
SSB_RP	Received (linear) average power of the resource elements that carry NR SSB signals and channels, measured at the UE antenna connector.
SSS	Secondary Synchronization Signal
sTAG	Secondary Timing Advance Group
SUL	Supplementary Uplink
TA	Timing Advance
TAG	Timing Advance Group
TCI	Transmission Configuration Indicator
TDD	Time Division Duplex
TDOA	Time Difference Of Arrival
TN	Terrestrial Network
TRP	Transmission-Reception Point
TTI	Transmission Time Interval
UE	User Equipment
UL	Uplink
VIL	Visible Interruption Length
VIRP	Visible Interruption Repetition Period
VSAT	Very Small Aperture Terminal

3.4 Test tolerances

The requirements given in the present document make no allowance for measurement uncertainty. The test specification 38.533 [5] defines the test tolerances.

3.5 Frequency bands grouping

3.5.1 Introduction

The intention with the frequency band grouping below is to increase the readability of the specification.

The frequency bands grouping is derived based on UE REFSENS requirements specified in [18, 19, 20] and assuming 0.5 dB step between the neighbour groups. The groups are defined in the order of increasing REFSENS, i.e., the group A has the smallest REFSENS among the groups. For the same SCS and a given bandwidth, the bands within the same group have the same Io conditions in a corresponding requirement in this specification, provided the bands support this SCS. For different SCSs supported by a frequency band and the same bandwidth, different Io conditions may apply for the frequency band in the requirements, while the band group is the same, based on the lowest REFSENS requirement normalized by the number of subcarriers among its supported SCSs for this bandwidth. For the same SCS but different supported bandwidths, the group for a band is determined based on the lowest REFSENS requirement normalized by the number of subcarriers among its supported bandwidths.

3.5.2 NR operating bands in FR1

NR frequency bands grouping for FR1 is specified in Table 3.5.2-1.

Table 3.5.2-1: NR frequency band groups for FR1

Group	NR FDD		NR TDD		NR SDL		NR CCA[10]	
	Band group notation	Operating bands	Band group notation	Operating bands	Band group notation	Operating bands	Band group notation	Operating bands
A	NR_FDD_FR1_A	n1, n18, n24, n70, n74[4], n91,	NR_TDD_FR1_A	n34, n38[9], n39, n40,	NR_SDL_FR1_A	n67, n75, n76	NR_CCA_FR1_A	-

		n92, n93, n94, n100		n50, n51, n53, n101				
B	NR_FDD_FR1_B	n65, n66, n74[3]	NR_TDD_FR1_B	n38[7]	NR_SDL_FR1_B	-	NR_CCA_FR1_B	-
C	NR_FDD_FR1_C	n30	NR_TDD_FR1_C	n48, n77[1], n78, n79	NR_SDL_FR1_C	-	NR_CCA_FR1_C	-
D	NR_FDD_FR1_D	n28	NR_TDD_FR1_D	n77[2]	NR_SDL_FR1_D	-	NR_CCA_FR1_D	-
E	NR_FDD_FR1_E	n2, n5, n7	NR_TDD_FR1_E	n41, n90	NR_SDL_FR1_E	-	NR_CCA_FR1_E	-
F	NR_FDD_FR1_F	n26[6]	NR_TDD_FR1_F	-	NR_SDL_FR1_F	-	NR_CCA_FR1_F	-
G	NR_FDD_FR1_G	n3, n8, n12, n13, n14, n20, n71, n85	NR_TDD_FR1_G	n104	NR_SDL_FR1_G	n29	NR_CCA_FR1_G	-
H	NR_FDD_FR1_H	n25	NR_TDD_FR1_H	-	NR_SDL_FR1_H	-	NR_CCA_FR1_H	-
I	NR_FDD_FR1_I	-	NR_TDD_FR1_I		NR_SDL_FR1_I	-	NR_CCA_FR1_I	n46
J	NR_FDD_FR1_J	-	NR_TDD_FR1_J	n47[8]	NR_SDL_FR1_J	-	NR_CCA_FR1_J	n96, n102

NOTE 1: Except 3.8 GHz to 4.2 GHz.
NOTE 2: Only 3.8 GHz to 4.2 GHz.
NOTE 3: Except 1475.9 MHz to 1510.9 MHz.
NOTE 4: Only when the band is confined in 1475.9 MHz to 1510.9 MHz.
NOTE 5: These bands are used only in NR carrier aggregation with other NR bands according to NR CA band combinations specified in TS 38.101-1 [18] and TS 38.101-3 [20].
NOTE 6: The minimum Io condition is reduced by 0.5 dB when the carrier frequency of the assigned NR channel bandwidth is within 865-894 MHz.
NOTE 7: When this band is only used for V2X SL service, the band is exclusively used for NR V2X in particular regions.
NOTE 8: This band is unlicensed band used for V2X service. There is no expected network deployment in this band.
NOTE 9: When this band is only used for WAN service.
NOTE 10: Operating bands where operation on carrier frequencies with CCA is supported.

3.5.2A NR operating bands for satellite access in FR1

NR frequency bands grouping for satellite access in FR1 is specified in Table 3.5.2A-1.

Table 3.5.2A-1: NR frequency band groups for satellite access in FR1

Group	NR FDD	
	Band group notation	Operating bands
A	NR_FDD_SAB_FR1_A	n255, n256
B	NR_FDD_SAB_FR1_B	
C	NR_FDD_SAB_FR1_C	
D	NR_FDD_SAB_FR1_D	
E	NR_FDD_SAB_FR1_E	
F	NR_FDD_SAB_FR1_F	
G	NR_FDD_SAB_FR1_G	
H	NR_FDD_SAB_FR1_H	
I	NR_FDD_SAB_FR1_I	
J	NR_FDD_SAB_FR1_J	

3.5.3 NR operating bands in FR2

NR frequency bands grouping for FR2 is specified in Table 3.5.3-1.

Table 3.5.3-1: NR frequency band groups for FR2

Group	Band group notation	Operating bands
A	NR_TDD_FR2_A	n257[1], n258[1], n261[1]
B	NR_TDD_FR2_B	n257[4], n258[4], n261[4]
C	NR_TDD_FR2_C	
D	NR_TDD_FR2_D	
E	NR_TDD_FR2_E	

F	NR_TDD_FR2_F	n260[4]
G	NR_TDD_FR2_G	n260[1]
H	NR_TDD_FR2_H	
I	NR_TDD_FR2_I	
J	NR_TDD_FR2_J	
K	NR_TDD_FR2_K	n257[5,6], n258[5,6], n262[1], n261[6]
L	NR_TDD_FR2_L	n257[2], n258[2], n261[2]
M	NR_TDD_FR2_M	
N	NR_TDD_FR2_N	n262[4]
O	NR_TDD_FR2_O	
P	NR_TDD_FR2_P	
Q	NR_TDD_FR2_Q	n259[5]
R	NR_TDD_FR2_R	
S	NR_TDD_FR2_S	
T	NR_TDD_FR2_T	n257[3], n258[3], n261[3]
U	NR_TDD_FR2_U	
V	NR_TDD_FR2_V	
W	NR_TDD_FR2_W	n262[2]
X	NR_TDD_FR2_X	
Y	NR_TDD_FR2_Y	n260[3]
Z	NR_TDD_FR2_Z	n257[7], n258[7], n261[7]
AA	NR_TDD_FR2_AA	n259[3]
AB	NR_TDD_FR2_AB	
AC	NR_TDD_FR2_AC	
AD	NR_TDD_FR2_AD	
AE	NR_TDD_FR2_AE	n262[3]
NOTE 1: UE power class 1. NOTE 2: UE power class 2. NOTE 3: UE power class 3. NOTE 4: UE power class 4. NOTE 5: UE power class 5. NOTE 6: UE power class 6. NOTE 7: UE power class 7.		

3.6 Applicability of requirements in this specification version

In this specification,

- ‘cell’, ‘PCell’, ‘PSCell’ and ‘SCell’ refer to NR cell, NR PCell, NR PSCell, and NR SCell,
- E-UTRA cells are referred to as ‘E-UTRA cell’, ‘E-UTRA PCell’, ‘E-UTRA PSCell’, and ‘E-UTRA SCell’,
- E-UTRA-NR dual connectivity where E-UTRA is the master is referred to as ‘E-UTRA-NR dual connectivity’ or ‘EN-DC’.
- NR-NR dual connectivity which involves two gNB acting as Master gNB and Secondary gNB is referred to as “NR-NR dual connectivity” or “NR-DC”. NR-DC in Rel-15 only includes the scenarios where all serving cells in MCG in FR1 and all serving cells in SCG in FR2.
- ‘active serving cell’ refers to PCell, PSCell and activated SCells

For UE configured with supplementary UL, the requirements in clause 7.1 and 7.3 shall also apply to uplink transmissions on supplementary UL.

Unless explictly stated, requirements do not apply when CCA is used on serving or neighbour cells.

3.6.1 RRC connected state requirements in DRX

For the requirements in RRC connected state specified in this version of the specification, the UE shall assume that no DRX is used provided the following conditions are met:

- DRX parameters are not configured or

- DRX parameters are configured and
  - *drx-InactivityTimer* is running or
  - *drx-RetransmissionTimerDL* is running or
  - *drx-RetransmissionTimerUL* is running or
  - *ra-ContentionResolutionTimer* is running or
  - a Scheduling Request sent on PUCCH is pending or
  - a PDCCH indicating a new transmission addressed to the C-RNTI of the MAC entity has not been received after successful reception of a Random Access Response for the preamble not selected by the MAC entity

Otherwise the UE shall assume that DRX is used.

3.6.2 Number of serving carriers

3.6.2.1 Number of serving carriers for SA

Requirements for standalone NR with NR PCell are applicable for the UE configured with the following number of serving NR CCs:

- up to 16 NR DL CCs in total, with 1 UL (or 2 UL if SUL is configured) in PCell and up to 8 UL (or 9 UL if SUL is configured) in total for SCells.
- SUL may be configured together with one of the UL

3.6.2.2 Number of serving carriers for EN-DC

Requirements for EN-DC operation of E-UTRA and NR with E-UTRA PCell and NR PSCell are applicable for the UE configured with the following number of serving NR CCs:

- up to 9 NR DL CCs in total, with 1 UL (or 2 UL if SUL is configured) in PSCell, up to 7 UL (or 8 UL if SUL is configured) in total for SCells in the FR of PSCell and up to 1 UL (or 2 UL if SUL is configured) in SCell in different FR with PSCell.
- SUL may be configured together with one of the UL

The applicable number of E-UTRA CC for EN-DC in the MCG for both UL and DL is specified in TS 36.133 [15].

3.6.2.3 Number of serving carriers for NE-DC

Requirements for NE-DC operation of NR and E-UTRA with NR PCell and E-UTRA PSCell are applicable for the UE configured with the following number of serving NR CCs:

- up to 7 NR DL CCs in total, with 1 UL (or 2 UL if SUL is configured) in PCell and up to 1 UL (or 2 UL if SUL is configured) in SCell.
- SUL may be configured together with one of the UL

The applicable number of E-UTRA CC for NE-DC in the SCG for both UL and DL is specified in TS 36.133 [15].

3.6.2.4 Number of serving carriers for NR-DC

Requirements for NR-DC are applicable for the UE configured with the following number of serving NR CCs:

- up to 2 NR DL CCs in total in FR1, up to 8 NR DL CCs in total in FR2, with 1 UL in PCell, 1 UL in PSCell, and up to 1 UL in each SCell.

3.6.3 Applicability for intra-band FR2

For the requirements in RRC connected state specified in this version of the specification, UE shall assume that the transmitted signals from the serving cells should have the same downlink spatial domain transmission filter on one OFDM symbol in the same band in FR2. Otherwise, the UE is not supposed to satisfy any requirements for SCell.

3.6.4 Applicability for FR2 UE power classes

For the requirements of each FR2 power class specified in this version of the specification, certain UE types with specific device architectures are assumed. The UE types can be found in TS 38.101-2 [19].

3.6.5 Applicability for SDL bands

The measurements accuracy requirements for SDL bands in this version of specification in clause 10.1 shall apply for NR intra-frequency measurements on SCC (SS-RSRP, SS-RSRQ, SS-SINR, and L1-RSRP) and inter-frequency measurements (SS-RSRP, SS-RSRQ, and SS-SINR).

3.6.6 Applicability of requirements for NGEN-DC operation

All the requirements in this specification applicable for EN-DC are also applicable for NGEN-DC.

3.6.7 Applicability of QCL

For the requirements specified in this version of the specification for TCI state switching, DL TCI state switching for unified TCI or UL TCI state switching for unified TCI, a reference signal is considered to be QCLed to another reference signal if it is in the same TCI chain as the other reference signal, provided that the number of Reference Signals in the chain is no more than 4. It is assumed there is single QCL type per TCI chain.

A DL TCI chain consists of an SSB, and one or more CSI-RS resources, and the TCI state of each Reference Signal includes another Reference Signal in the same TCI chain, where the SSB can be associated with serving cell PCID or associated with a PCID different from serving cell PCID.

DMRS of PDCCH or PDSCH is QCLed with the reference signal in its active TCI state and any other reference signal that is QCLed, based on the criteria for DL TCI chain, with the reference signal in the active TCI state.

A UL TCI chain consists of an SSB, and one or more CSI-RS resources, and the TCI state of each Reference Signal includes another Reference Signal in the same TCI chain, where the SSB can be associated with serving cell PCID or associated with a PCID different from serving cell PCID.

DMRS of PUCCH or PUSCH is QCLed with the reference signal in its active TCI state and any other reference signal that is QCLed, based on the criteria for UL TCI chain, with the reference signal in the active TCI state.

3.6.8 Applicability of 2-step RA and 4-step RA in RRM requirements

Unless explicitly stated otherwise the requirements under the following clauses, where the UE transmits random acess (with requirements in clause 6.2.2) to NR serving cell or NR target cell, are applicable for both 2-step RA and 4-step RA procedures [3]:

- Handover requirements in clause 6.1, except for clauses 6.1.2 and 6.1B,
- RRC connection re-establishment requirements in clause 6.2.1,
- RRC connection release with redirection to NR requirements in clause 6.2.3.2.1,
- UE transmit timing requirements in clause 7.1,
- PSCell addition delay requirements in clause 8.9.2,
- PSCell change requirements in clause 8.11 and
- Conditional PSCell change requirements in clause 8.11B.

Unless explicitly stated otherwise the requirements under the following clauses, where the UE transmits random acess (with requirements in clause 6.2.2A) to NR serving cell or NR target cell subject to uplink CCA, are applicable for both 2-step RA and 4-step RA procedures [3]:

- Handover requirements with CCA in clause 6.1B,
- RRC connection re-establishment requirements with CCA in clause 6.2.1A,
- RRC connection release with redirection to NR requirements with CCA in clause 6.2.3.2.3, and
- UE transmit timing requirements with CCA in clause 7.1.

3.6.9 Applicability of requirements for scheduling availability

The scheduling availability requirements in clause 8.1.7.3, 8.5.7.3, 8.5.8.3, 9.5.6.3 and 9.10.2.6.2 assumes that:

- The UE is not configured with simultaneous UL/DL between two FR2 bands if the UE does not have the capability of supporting *simultaneousRxTxInterBandCA*, and
- The UE is not configured with mixed numerology on two FR2 CCs if the UE does not have the capability of supporting simultaneous reception with two different numerologies between FR2 CCs in DL.

The scheduling availability requirements in clause 8.1.7.1, 8.1.7.2, 8.5.7.1, 8.5.7.2, 8.5.8.1, 8.5.8.2, 9.5.6.1, 9.5.6.2, 9.8.6.1, and 9.8.6.2 assumes that the UE is not configured with simultaneous UL/DL between two FR1 bands if the UE does not have the capability of supporting *simultaneousRxTxInterBandCA*.

The scheduling availability requirements in clause 8.1.7.4, 8.5.7.4, 8.5.8.4, 9.5.6.4 and 9.8.6.4 assumes that the UE is not configured with simultaneous UL/DL between FR1 and FR2 bands if the UE does not have the capability of supporting *simultaneousRxTxInterBandCA* on this band combination.

3.6.10 Applicability of requirements for measurement restrictions

The requirements for measurement restrictions in clause 8.1.2.3, 8.1.3.3, 8.5.2.3, 8.5.3.3, 8.5.5.3, 8.5.6.3, 8.18.2.3, 8.18.3.3, 8.18.5.3, 8.18.6.3, 9.5.5, 9.8.5 and 9.13.5 are not applicable if the following condition is met:

- The network configures mixed numerology on two CCs if the UE does not have the capability of supporting simultaneous reception with different numerologies between the two CCs in DL.

3.6.11 Applicability of requirements for Redcap UEs

3.6.11.1 RRC connected state requirements in DRX

The requirements in clause 3.6.1 shall apply.

3.6.11.2 Applicability for FR2 Redcap UE power classes

The requirements in clause 3.6.4 shall apply.

3.6.11.3 Applicability of QCL

The requirements in clause 3.6.7 shall apply.

3.6.12 Applicability of requirements for Satellite Access

The requirements for Satellite Access defined in clauses with suffix ‘C’ apply provided that UE indicates *nonTerrestrialNetwork* and is accessing a cell served by a Satellite Access Node (SAN). The requirements apply provided that serving and all neighbour satellites on the same layer are of same satellite type (LEO or GEO).

3.6.13 Applicability of requirements for FR2

Unless stated otherwise, the requirements for FR2 are applicable to both FR2-1 and FR2-2, except for the following cases:

SFTD measurement requirements in clause 9.2.5.4, 9.3.8, 10.1.21 for FR2 are only applicable for FR2-1,

CGI identification requirements in clause 9.11 for FR2 are only applicable for FR2-1,

Inter-band CA requirements in all corresponding clauses for FR2 are only applicable for FR2-1.

L1-RSRP measurements for a cell with different PCI from serving cell in clause 9.13 for FR2 are only applicable for FR2-1.

3.6.14 Applicability of requirements for FR2 Power Class 6

For Rel-17 FR2 power class 6 for the UE type of high speed train roof-mounted UE, UE shall only be in NR SA operation.

Measurement and evaluation period requirements with *highSpeedMeasFlagFR2-r17* configured in clause 4.2.2.3, 8.1.2.2, 8.5.2.2, 9.2.5, 9.2.6, 9.5.4, [9.8.4], delay requirements in clause 6.2.1.2.1, 8.10.3A, and UL timing adjustment in clause 7.1.2.3, are only applicable when any two SSBs from non-collocated adjacent RRHs are not on the same or consecutive symbols.

L1-SINR accuracy requirements for FR2 configured in clause 10.1.28 and intra-frequency SS-SINR accuracy requirements configured in clause 10.1.13 are not applicable to Rel-17 HST FR2 power class 6 UEs.

4 SA: RRC_IDLE state mobility

4.1 Cell Selection

After a UE has switched on and a PLMN has been selected, the Cell selection process takes place, as described in TS 38.304 [1]. This process allows the UE to select a suitable cell where to camp on in order to access available services. In this process, the UE can use stored information (*Stored information cell selection*) or not (*Initial cell selection*).

The 1 Rx RedCap UE for the cell selection procedure [1] applies:

- *Qrxlevmin* as the signaled value of *Qrxlevmin* [2] -1 dB.
- *Qqualmin* as the signaled value of *Qqualmin* [2] -1 dB.

4.2 Cell Re-selection

4.2.1 Introduction

The cell reselection procedure allows the UE to select a more suitable cell and camp on it.

When the UE is in either *Camped Normally* state or *Camped on Any Cell* state on a cell, the UE shall attempt to detect, synchronise, and monitor intra-frequency, inter-frequency and inter-RAT cells indicated by the serving cell. For intra-frequency and inter-frequency cells the serving cell may not provide explicit neighbour list but carrier frequency information and bandwidth information only. UE measurement activity is also controlled by measurement rules defined in TS 38.304 [1], allowing the UE to limit its measurement activity

In the requirements of clause 4.2, the exceptions for side conditions apply as follows:

- for the UE capable of CA, the applicable exceptions for side conditions are specified in Annex B, clause B.3.2.1, B.3.2.3, or B.3.2.5 for UE supporting CA in FR1, CA in FR2 and CA between FR1 and FR2, respectively;

- for the UE capable of SUL, the applicable exceptions for side conditions are specified in Annex B, clause B.3.4.1 for UE supporting SUL in FR1.

4.2.2 Requirements

4.2.2.1 UE measurement capability

For idle mode cell re-selection purposes, and for UE supporting *IdleInactiveMeasurements-r16* or *idleInactiveEUTRA-MeasReport-r16*, for NR CA and MR-DC measurement purpose, the UE shall be capable of monitoring at least:

- Intra-frequency carrier, and

- Depending on UE capability, 7 NR inter-frequency carriers, and

- Depending on UE capability, 7 FDD E-UTRA inter-RAT carriers, and

- Depending on UE capability, 7 TDD E-UTRA inter-RAT carriers.

In addition to the requirements defined above, a UE supporting E-UTRA measurements in RRC_IDLE state shall be capable of monitoring a total of at least 14 carrier frequency layers, which includes serving layer, comprising of any above defined combination of E-UTRA FDD, E-UTRA TDD and NR layers.

4.2.2.2 Measurement and evaluation of serving cell

The UE shall measure the SS-RSRP and SS-RSRQ level of the serving cell and evaluate the cell selection criterion S defined in TS 38.304 [1] for the serving cell at least once every M1*N1 DRX cycle; where:

M1=2 if SMTC periodicity (T_{SMTC}) > 20 ms and DRX cycle $\leq$ 0.64 second,

otherwise M1=1.

The UE shall filter the SS-RSRP and SS-RSRQ measurements of the serving cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by, at least DRX cycle/2.

If the UE has evaluated according to Table 4.2.2.2-1 in N_{serv} consecutive DRX cycles that the serving cell does not fulfil the cell selection criterion S, the UE shall initiate the measurements of all neighbour cells indicated by the serving cell, regardless of the measurement rules currently limiting UE measurement activities.

If the UE in RRC_IDLE has not found any new suitable cell based on searches and measurements using the intra-frequency, inter-frequency and inter-RAT information indicated in the system information for 10 s, the UE shall initiate cell selection procedures for the selected PLMN as defined in TS 38.304 [1].

Table 4.2.2.2-1: N_{serv}

DRX cycle length [s]	Scaling Factor (N1)			N_{serv} [number of DRX cycles]
	FR1	FR2-1 Note1	FR2-2 Note2	
0.32	1	8	12	M1*N1*4
0.64		5	8	M1*N1*4
1.28		4	6	N1*2
2.56		3	5	N1*2
Note 1: Applies for UE supporting FR2-1 power class 2&3&4. For UE supporting FR2-1 power class 1 or 5, N1 = 8 for all DRX cycle length.				
Note 2: Applies for UE supporting FR2-2 power class 2&3. For UE supporting FR2-2 power class 1, N1 = 12 for all DRX cycle length.				

4.2.2.3 Measurements of intra-frequency NR cells

The UE shall be able to identify new intra-frequency cells and perform SS-RSRP and SS-RSRQ measurements of the identified intra-frequency cells without an explicit intra-frequency neighbour list containing physical layer cell identities.

The UE shall be able to evaluate whether a newly detectable intra-frequency cell meets the reselection criteria defined in TS38.304 [1] within T_{detect,NR_Intra} when that Treselection= 0 . An intra frequency cell is considered to be detectable according to the conditions defined in Annex B.1.2 for a corresponding Band.

The UE shall measure SS-RSRP and SS-RSRQ at least every $T_{measure,NR_Intra}$ (see table 4.2.2.3-1, table 4.2.2.3-2 or table 4.2.2.3-3) for intra-frequency cells that are identified and measured according to the measurement rules.

The UE shall filter SS-RSRP and SS-RSRQ measurements of each measured intra-frequency cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least $T_{measure,NR_Intra}/2$.

The UE shall not consider a NR neighbour cell in cell reselection, if it is indicated as not allowed in the measurement control system information of the serving cell.

For an intra-frequency cell that has been already detected, but that has not been reselected to, the filtering shall be such that the UE shall be capable of evaluating that the intra-frequency cell has met reselection criterion defined in TS38.304 [1] within $T_{evaluate,NR_Intra}$ when $T_{reselection} = 0$ as specified in table 4.2.2.3-1, table 4.2.2.3-2 or table 4.2.2.3-3 provided that:

when *rangeToBestCell* is not configured:

- the cell is at least 3dB better ranked in FR1 or 4.5dB better ranked in FR2.

when *rangeToBestCell* is configured:

- the cell has the highest number of beams above the threshold *absThreshSS-BlocksConsolidation* among all detected cells whose cell-ranking criterion R value in TS38.304 [1] is within *rangeToBestCell* of the cell-ranking criterion R value of the highest ranked cell.
    - if there are multiple such cells, the cell has the highest rank among them.
        - the cell is at least 3dB better ranked in FR1 or 4.5dB better ranked in FR2 if the current serving cell is among them.

When evaluating cells for reselection, the SSB side conditions apply to both serving and non-serving intra-frequency cells.

If $T_{reselection}$ timer has a non zero value and the intra-frequency cell is satisfied with the reselection criteria which are defined in TS38.304 [1], the UE shall evaluate this intra-frequency cell for the $T_{reselection}$ time. If this cell remains satisfied with the reselection criteria within this duration, then the UE shall reselect that cell.

For UE neither configured with *highSpeedMeasFlag-r16* nor *highSpeedMeasFlagFR2-r17*, $T_{detect,NR_Intra,}$ $T_{measure,NR_Intra}$ and $T_{evaluate,\ NR_intra}$ are specified in Table 4.2.2.3-1. For UE configured with *highSpeedMeasFlag-r16*, $T_{detect,NR_Intra,}$ $T_{measure,NR_Intra}$ and $T_{evaluate,\ NR_intra}$ are specified in Table 4.2.2.3-2. For FR2 power class 6 UE configured with *highSpeedMeasFlagFR2-r17*, $T_{detect,NR_Intra,}$ $T_{measure,NR_Intra}$ and $T_{evaluate,\ NR_intra}$ are specified in Table 4.2.2.3-3.

The requirements in Table 4.2.2.3-2 apply only when the UE supports *measurementEnhancement-r16* or *intraNR-MeasurementEnhancement-r16*. For UE neither supporting either *measurementEnhancement-r16* nor *intraNR-MeasurementEnhancement-r16*, the UE is not required to meet the requirements specified in Table 4.2.2.3-2.

Table 4.2.2.3-1: $T_{detect,NR_Intra,}$ $T_{measure,NR_Intra}$ and $T_{evaluate,NR_Intra}$

DRX cycle length [s]	Scaling Factor (N1)			T_{detect,NR_Intra} [s] (number of DRX cycles)	$T_{measure,NR_Intra}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Intra}$ [s] (number of DRX cycles)
	FR1	FR2-1 Note1	FR2-2 Note2			

0.32	1	8	12	11.52 x N1 x M2 (36 x N1 x M2)	1.28 x N1 x M2 (4 x N1 x M2)	5.12 x N1 x M2 (16 x N1 x M2)
0.64		5	8	17.92 x N1 (28 x N1)	1.28 x N1 (2 x N1)	5.12 x N1 (8 x N1)
1.28		4	6	32 x N1 (25 x N1)	1.28 x N1 (1 x N1)	6.4 x N1 (5 x N1)
2.56		3	5	58.88 x N1 (23 x N1)	2.56 x N1 (1 x N1)	7.68 x N1 (3 x N1)
Note 1: Applies for UE supporting FR2-1 power class 2&3&4. For UE supporting FR2-1 power class 1 or 5, N1 = 8 for all DRX cycle length. Note 2: Applies for UE supporting FR2-2 power class 2&3. For UE supporting FR2-2 power class 1, N1 = 12 for all DRX cycle length. Note 3: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1. If different SMTC periodicities are configured for different cells, the SMTC periodicity in this note is the one used by the cell being identified. During PSS/SSS detection, the periodicity of the SMTC configured for the intra-frequency carrier is assumed, and if the actual SSB transmission periodicity is greater than the SMTC configured for the intra-frequency carrier, longer T_{detect, NR_intra} is expected.						

Table 4.2.2.3-2: T_{detect,NR_Intra}, $T_{measure,NR_Intra}$ and $T_{evaluate,NR_Intra}$ for UE configured with *highSpeedMeasFlag-r16* (Frequency range FR1)

DRX cycle length [s]	T_{detect,NR_Intra} [s] (number of DRX cycles)	$T_{measure,NR_Intra}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Intra}$ [s] (number of DRX cycles)
0.32	2.56 x M2 (8 x M2)	0.32 x M3 (1 x M3)	0.96 x M4 (3 x M4)
0.64	5.12 (8)	0.64 (1)	1.92 (3)
1.28	8.96 (7)	1.28 (1)	3.84 (3)
2.56	58.88 (23)	2.56 (1)	7.68 (3)
Note 1: when SMTC < = 40 ms, M2 = M3 = M4 = 1; and when SMTC > 40 ms, M2 = 1.5, M3 = M4 = 2 Note 2: When *highSpeedMeasFlag-r16* is configured, the requirements apply only to UE supporting either *measurementEnhancement-r16* or *intraNR-MeasurementEnhancement-r16.*			

Table 4.2.2.3-3: T_{detect,NR_Intra}, $T_{measure,NR_Intra}$ and $T_{evaluate,NR_Intra}$ for UE configured with *highSpeedMeasFlagFR2-r17* (Frequency range FR2)

DRX cycle length [s]	Scaling Factor (N1)	T_{detect,NR_Intra} [s] (number of DRX cycles)	$T_{measure,NR_Intra}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Intra}$ [s] (number of DRX cycles)
0.32	$N2^{Note2}$	2.56 x N1 x M2 (8 x N1 x M2)	0.32 x N1 x M3 (1 x N1 x M3)	0.96 x N1 x M4 (3 x N1 x M4)
0.64	5	17.92 x N1 (28 x N1)	1.28 x N1 (2 x N1)	5.12 x N1 (8 x N1)
1.28	4	32 x N1 (25 x N1)	1.28 x N1 (1 x N1)	6.4 x N1 (5 x N1)
2.56	3	58.88 x N1 (23 x N1)	2.56 x N1 (1 x N1)	7.68 x N1 (3 x N1)
Note 1: When SMTC < = 40 ms, M2 = M3 = M4 = 1; and when SMTC > 40 ms, M2 = 1.5, M3 = M4 = 2 Note 2: N2 = 2 when [*highSpeedMeasFlagFR2-r17*] = [set1]; N2 = 6 when [*highSpeedMeasFlagFR2-r17*] = [set2].				

4.2.2.4 Measurements of inter-frequency NR cells

The UE shall be able to identify new inter-frequency cells and perform SS-RSRP or SS-RSRQ measurements of identified inter-frequency cells if carrier frequency information is provided by the serving cell, even if no explicit neighbour list with physical layer cell identities is provided.

If Srxlev > $S_{nonIntraSearchP}$ and Squal > $S_{nonIntraSearchQ}$ then the UE shall search for inter-frequency layers of higher priority at least every $T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in clause 4.2.2.7.

If Srxlev ≤ $S_{nonIntraSearchP}$ or Squal ≤ $S_{nonIntraSearchQ}$ then the UE shall search for and measure inter-frequency layers of higher, equal or lower priority in preparation for possible reselection. In this scenario, the minimum rate at which the UE is required to search for and measure higher priority layers shall be the same as that defined below in this clause.

The UE shall be able to evaluate whether a newly detectable inter-frequency cell meets the reselection criteria defined in TS38.304 [1] within $K_{carrier} * T_{detect,NR_Inter} + K_{carrier_HST} * T_{detect,NR_Inter_HST}$ if at least carrier frequency information is provided for inter-frequency neighbour cells by the serving cells when $T_{reselection} = 0$ provided that the reselection criteria is met by a margin of at least 5 dB in FR1 or 6.5dB in FR2 for reselections based on ranking or 6dB in FR1 or 7.5dB in FR2 for SS-RSRP reselections based on absolute priorities or 4dB in FR1 and 4dB in FR2 for SS-RSRQ reselections based on absolute priorities.

The parameter $K_{carrier}$ is the number of NR inter-frequency carriers which are not configured with *highSpeedMeasInterFreq-r17* for FR1 indicated by the serving cell. The parameter $K_{carrier_HST}$ is the number of NR inter-frequency carriers which are configured with *highSpeedMeasInterFreq-r17* for FR1 indicated by the serving cell. The parameter $K_{carrier}$ for a UE configured with idle mode CA measurements (while T331 is running), is the combined number of NR inter-frequency carriers indicated by the serving cell and the number of NR inter-frequency carriers configured for idle mode CA measurements which are not configured with *highSpeedMeasInterFreq-r17* for FR1. The parameter $K_{carrier_HST}$ for a UE configured with idle mode CA measurements (while T331 is running), is the combined number of NR inter-frequency carriers indicated by the serving cell and the number of NR inter-frequency carriers configured for idle mode CA measurements which are configured with *highSpeedMeasInterFreq-r17* for FR1.

Note: combined total number means that if a carrier is an inter-frequency carrier indicated by the serving cell for mobility and additionally a carrier configured for idle mode CA measurements, it only counts as one carrier.

An inter-frequency cell is considered to be detectable according to the conditions defined in Annex B.1.3 for a corresponding Band.

When higher priority cells are found by the higher priority search, they shall be measured at least every $T_{measure,NR_Inter}$. If, after detecting a cell in a higher priority search, it is determined that reselection has not occurred then the UE is not required to continuously measure the detected cell to evaluate the ongoing possibility of reselection. However, the minimum measurement filtering requirements specified later in this clause shall still be met by the UE before it makes any determination that it may stop measuring the cell. If the UE detects on a NR carrier a cell whose physical identity is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform measurements on that cell.

The UE shall measure SS-RSRP or SS-RSRQ at least every $K_{carrier} * T_{measure,NR_Inter} + K_{carrier_HST} * T_{measure,NR_Inter_HST}$ (see table 4.2.2.4-1 and table 4.2.2.4-2 if UE declares support of idle mode inter-frequency measurement enhancement when configured with *highSpeedMeasInterFreq-r17* for FR1, otherwise see table 4.2.2.4-1 only) for identified lower or equal priority inter-frequency cells. If the UE detects on a NR carrier a cell whose physical identity is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform measurements on that cell.

The UE shall filter SS-RSRP or SS-RSRQ measurements of each measured higher, lower and equal priority inter-frequency cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least $T_{measure,NR_Inter}/2$ for carriers which are not configured with *highSpeedMeasInterFreq-r17* for FR1or $T_{measure,NR_Inter_HST}/2$ for carriers which are configured with *highSpeedMeasInterFreq-r17* forFR1.

The UE shall not consider a NR neighbour cell in cell reselection, if it is indicated as not allowed in the measurement control system information of the serving cell.

For an inter-frequency cell that has been already detected, but that has not been reselected to, the filtering shall be such that the UE shall be capable of evaluating that the inter-frequency cell has met reselection criterion defined TS 38.304 [1] within $K_{carrier} * T_{evaluate,NR_Inter} + K_{carrier_HST} * T_{evaluate,NR_Inter_HST}$ when $T_{reselection} = 0$ as specified in table 4.2.2.4-1 and table 4.2.2.4-2 if UE declares support of idle mode inter-frequency measurement enhancement when configured with *highSpeedMeasInterFreq-r17* for FR1, otherwise see table 4.2.2.4-1 only, provided that the reselection criteria is met by

- the condition when performing equal priority reselection and
- when *rangeToBestCell* is not configured:
  - the cell is at least 5dB better ranked in FR1 or 6.5dB better ranked in FR2 or.

  when *rangeToBestCell* is configured:

- the cell has the highest number of beams above the threshold *absThreshSS-BlocksConsolidation* among all detected cells whose cell-ranking criterion R value in TS38.304 [1] is within *rangeToBestCell* of the cell-ranking criterion R value of the highest ranked cell.
  - if there are multiple such cells, the cell has the highest rank among them
  - the cell is at least 5dB better ranked in FR1 or 6.5dB better ranked in FR2 if the current serving cell is among them. or

- 6dB in FR1 or 7.5dB in FR2 for SS-RSRP reselections based on absolute priorities or
- 4dB in FR1 or 4dB in FR2 for SS-RSRQ reselections based on absolute priorities.

When evaluating cells for reselection, the SSB side conditions apply to both serving and inter-frequency cells.

If $T_{reselection}$ timer has a non zero value and the inter-frequency cell is satisfied with the reselection criteria, the UE shall evaluate this inter-frequency cell for the $T_{reselection}$ time. If this cell remains satisfied with the reselection criteria within this duration, then the UE shall reselect that cell.

The UE is not expected to meet the measurement requirements for an inter-frequency carrier under DRX cycle=320 ms defined in Table 4.2.2.4-1 and Table 4.2.2.4-2 under the following conditions:

- $T_{SMTC_intra} = T_{SMTC_inter} = 160$ ms; where
  - TSMTC_intra is the periodicity of the SMTC configured for the intra-frequency carrier if no identified intra-frequency cell is in the PCI list of smtc2-LP on this intra-frequency carrier; TSMTC_intra is the periodicity of the smtc2-LP configured for the intra-frequency carrier if at least one identified intra-frequency cell is in the PCI list of smtc2-LP on this intra-frequency carrier. During PSS/SSS detection, the periodicity of the SMTC configured for the intra-frequency carrier is assumed for TSMTC_intra. If the actual SSB transmission periodicity is greater than the SMTC configured for the intra-frequency carrier, longer Tdetect, NR_intra is expected.
  - TSMTC_inter is the actual SMTC periodicity used by the inter-frequency cell being identified. During PSS/SSS detection, the periodicity of the SMTC configured for the inter-frequency carrier is assumed for TSMTC_inter. If the actual SSB transmission periodicity is greater than the SMTC configured for the inter-frequency carrier, longer Tdetect, NR_inter is expected.
- SMTC occasions configured for the inter-frequency carrier occur up to 1 ms before the start or up to 1 ms after the end of the SMTC occasions configured for the intra-frequency carrier, and
- SMTC occasions configured for the intra-frequency carrier and for the inter-frequency carrier occur up to 1 ms before the start or up to 1 ms after the end of the paging occasion in TS38.304 [1].

Table 4.2.2.4-1: T_{detect,NR_Inter}, $T_{measure,NR_Inter}$ and $T_{evaluate,NR_Inter}$

DRX cycle length [s]	Scaling Factor (N1)			T_{detect,NR_Inter} [s] (number of DRX cycles)	$T_{measure,NR_Inter}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Inter}$ [s] (number of DRX cycles)
	FR1	FR2-1 Note1	FR2-2 Note2			
0.32	1	8	12	11.52 x N1 x 1.5 (36 x N1 x 1.5)	1.28 x N1 x 1.5 (4 x N1 x 1.5)	5.12 x N1 x 1.5 (16 x N1 x 1.5)
0.64		5	8	17.92x N1 (28 x N1)	1.28 x N1 (2 x N1)	5.12 x N1 (8 x N1)
1.28		4	6	32 x N1 (25 x N1)	1.28 x N1 (1 x N1)	6.4 x N1 (5 x N1)
2.56		3	5	58.88 x N1 (23 x N1)	2.56 x N1 (1 x N1)	7.68 x N1 (3 x N1)

Note 1: Applies for UE supporting FR2-1 power class 2&3&4. For UE supporting FR2-1 power class 1 or 5, N1 = 8 for all DRX cycle length.
Note 2: Applies for UE supporting FR2-2 power class 2&3. For UE supporting FR2-2 power class 1, N1 = 12 for all DRX cycle length.

Table 4.2.2.4-2: T_{detect,NR_Inter_HST}, $T_{measure,NR_Inter_HST}$ and $T_{evaluate,NR_Inter_HST}$ for FR1 configured with *highSpeedMeasInterFreq-r17* note2

DRX cycle length [s]	T_{detect,NR_Inter_HST} [s] (number of DRX cycles)	$T_{measure,NR_Inter_HST}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Inter_HST}$ [s] (number of DRX cycles)
0.32	[3.2 x M2 (10 x M2)] Note 1	[0.32 x M3 ([1] x M3)] Note 1	0.96 x M4 (3 x M4) Note 1
0.64	[6.4 (10)]	[0.64 (1)]	1.92 (3)
1.28	[10.24 (8)]	1.28 (1)	3.84 (3)
2.56	58.88 (23)	2.56 (1)	7.68 (3)

Note 1: When SMTC < = 40 ms, M2 = M3 = M4 = 1; and when SMTC > 40 ms, M2 = 1.5, M3 = M4 = 2

Note 2: The support of HST Idle mode inter-frequency measurement enhancement is optional without capability signalling. Apply for UE declarating supports idle mode inter-frequency measurement enhancement for HST, otherwise Table 4.2.2.4-1 shall be used.

4.2.2.5 Measurements of inter-RAT E-UTRAN cells

If Srxlev > $S_{nonIntraSearchP}$ and Squal > $S_{nonIntraSearchQ}$ then the UE shall search for inter-RAT E-UTRAN layers of higher priority at least every $T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in clause 4.2.2.

If Srxlev ≤ $S_{nonIntraSearchP}$ or Squal ≤ $S_{nonIntraSearchQ}$ then the UE shall search for and measure inter-RAT E-UTRAN layers of higher, lower priority in preparation for possible reselection. In this scenario, the minimum rate at which the UE is required to search for and measure higher priority inter-RAT E-UTRAN layers shall be the same as that defined below for lower priority RATs.

The requirements in this clause apply for inter-RAT E-UTRAN FDD measurements and E-UTRA TDD measurements. When the measurement rules indicate that inter-RAT E-UTRAN cells are to be measured, the UE shall measure RSRP and RSRQ of detected E-UTRA cells in the neighbour frequency list at the minimum measurement rate specified in this clause.

Theparameter $N_{EUTRA_carrier}$ is the total number of configured E-UTRA carriers indicated to meet non high speed requirements in the neighbour frequency list. The parameter $N_{EUTRA_carrier_HST}$ is the total number of configured E-UTRA carriers indicated to meet high speed requirements in the neighbour frequency list. If Srxlev ≤ $S_{nonIntraSearchP}$ or Squal ≤ $S_{nonIntraSearchQ}$, an inter-RAT E-UTRAN layer is indicated to meet high speed requirements if highSpeedMeasFlag-r16 is configured and the carrier to be measured is configured with highSpeedEUTRACarrier-r16 and UE supports the enhanced inter-RAT E-UTRAN measurement requirements. If Srxlev > $S_{nonIntraSearchP}$ and Squal > $S_{nonIntraSearchQ}$, UE is required to meet non high speed requirements no matter whether highSpeedMeasFlag-r16 or highSpeedEUTRACarrier-r16 is configured or not.

The parameter $N_{EUTRA_carrier}$ for a UE configured with idle mode DC measurements (while T331 is running), is the combined number of configured E-UTRA carriers in the neighbour frequency list and E-UTRA carriers configured for idle mode DC measurements, excluding the configured E-UTRA carriers indicated to meet high speed requirements in the neighbour frequency list.

Note: combined total number means that if a carrier is an E-UTRA carrier indicated by the serving cell for mobility and additionally a carrier configured for idle mode CA/DC measurements, it only counts as one carrier.

The UE shall filter RSRP and RSRQ measurements of each measured E-UTRA cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least half the minimum specified measurement period.

An inter-RAT E-UTRA cell is considered to be detectable provided the following conditions are fulfilled:

- the same conditions as for inter-frequency RSRP measurements specified in TS 36.133 [15, Annex B.1.2] are fulfilled for a corresponding Band, and
- the same conditions as for inter-frequency RSRQ measurements specified in TS 36.133 [15, Annex B.1.2] are fulfilled for a corresponding Band.
- SCH conditions specified in TS 36.133 [15, Annex B.1.2] are fulfilled for a corresponding Band

The UE shall be able to evaluate whether a newly detectable inter-RAT E-UTRAN cell meets the reselection criteria defined in TS38.304 [1] within $N_{EUTRA_carrier_HST} * T_{detect,EUTRAN_HST} + N_{EUTRA_carrier} * T_{detect,EUTRAN}$ when Srxlev ≤ $S_{nonIntraSearchP}$ or Squal ≤ $S_{nonIntraSearchQ}$ when $T_{reselection} = 0$ provided that the reselection criteria is met by a margin of at least 6dB for RSRP reselections based on absolute priorities or 4dB for RSRQ reselections based on absolute priorities.

Cells which have been detected shall be measured at least every $N_{EUTRA_carrier_HST} * T_{measure,EUTRAN_HST} + N_{EUTRA_carrier} * T_{measure,EUTRAN}$ when Srxlev ≤ $S_{nonIntraSearchP}$ or Squal ≤ $S_{nonIntraSearchQ}$.

When higher priority cells are found by the higher priority search, they shall be measured at least every $T_{measure,EUTRAN}$. If, after detecting a cell in a higher priority search, it is determined that reselection has not occurred then the UE is not required to continuously measure the detected cell to evaluate the ongoing possibility of reselection. However, the minimum measurement filtering requirements specified later in this clause shall still be met by the UE before it makes any determination that it may stop measuring the cell.

If the UE detects on an inter-RAT E-UTRAN carrier a cell whose physical identity is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform measurements on that cell.

The UE shall not consider an inter-RAT E-UTRA cell in cell reselection, if it is indicated as not allowed in the measurement control system information of the serving cell.

For a cell that has been already detected, but that has not been reselected to, the filtering shall be such that the UE shall be capable of evaluating that an already identified inter-RAT E-UTRA cell has met reselection criterion defined in TS 38.304 [1] within $N_{EUTRA_carrier_HST} * T_{evaluate,EUTRAN_HST} + N_{EUTRA_carrier} * T_{evaluate,EUTRAN}$ when $T_{reselection} = 0$ as speficied in table 4.2.2.5-1 and 4.2.2.5-2 provided that the reselection criteria is met by a margin of at least 6dB for RSRP reselections based on absolute priorities or 4dB for RSRQ reselections based on absolute priorities.

If $T_{reselection}$ timer has a non zero value and the inter-RAT E-UTRA cell is satisfied with the reselection criteria which are defined in TS 38.304 [1], the UE shall evaluate this E-UTRA cell for the $T_{reselection}$ time. If this cell remains satisfied with the reselection criteria within this duration, then the UE shall reselect that cell.

Table 4.2.2.5-1: $T_{detect,EUTRAN}$, $T_{measure,EUTRAN}$, and $T_{evaluate,EUTRAN}$

DRX cycle length [s]	$T_{detect,EUTRAN}$ [s] (number of DRX cycles)	$T_{measure,EUTRAN}$ [s] (number of DRX cycles)	$T_{evaluate,EUTRAN}$ [s] (number of DRX cycles)
0.32	11.52 (36)	1.28 (4)	5.12 (16)
0.64	17.92 (28)	1.28 (2)	5.12 (8)
1.28	32(25)	1.28 (1)	6.4 (5)
2.56	58.88 (23)	2.56 (1)	7.68 (3)

Table 4.2.2.5-2: $T_{detect,EUTRAN_HST}$, $T_{measure,EUTRAN_HST}$, and $T_{evaluate,EUTRAN_HST}$ for UE configured with highSpeedMeasFlag-r16

DRX cycle length [s]	$T_{detect,EURAN_HST}$ [s] (number of DRX cycles)	$T_{measure,EUTRAN_HST}$ [s] (number of DRX cycles)	$T_{evaluate,EUTRAN_HST}$ [s] (number of DRX cycles)
0.32	4.16 (13)	0.64 (2)	0.96 (3)
0.64	7.68 (12)	1.28 (2)	1.92 (3)
1.28	8.96 (7)	1.28 (1)	3.84 (3)
2.56	58.88 (23)	2.56 (1)	7.68 (3)
Note 1: When highSpeedMeasFlag-r16 is configured, the requirements apply only to UE supporting either *measurementEnhancement-r16* or *[interRAT-MeasurementEnhancement-r16]*.			

The requirements in Table 4.2.2.5-2 apply only when the UE supports *measurementEnhancement-r16* or *interRAT-MeasurementEnhancement-r16*. For UE not supporting either *measurementEnhancement-r16* or *interRAT-MeasurementEnhancement-r16*, the UE is not required to meet the requirements specified in Table 4.2.2.5-2.

4.2.2.6 Maximum interruption in paging reception

UE shall perform the cell re-selection with minimum interruption in monitoring downlink channels for paging reception.

At intra-frequency and inter-frequency cell re-selection, the UE shall monitor the downlink of serving cell for paging reception until the UE is capable to start monitoring downlink channels of the target intra-frequency and inter-frequency cell for paging reception. The interruption time shall not exceed $T_{SI-NR} + 2*T_{target_cell_SMTC_period}$ ms. $T_{target_cell_SMTC_period}$ is the periodicity of the SMTC occasions configured for the target NR cell. If the target cell is in the PCI list of *smtc2-LP*, the SMTC periodicity follows *smtc2-LP*; otherwise, the SMTC periodicity follows *smtc*.

At inter-RAT cell re-selection, the UE shall monitor the downlink of serving cell for paging reception until the UE is capable to start monitoring downlink channels for paging reception of the target inter-RAT cell. For NR to E-UTRAN cell re-selection the interruption time must not exceed $T_{SI-EUTRA}$ + 55 ms.

T_{SI-NR} is the time required for receiving all the relevant system information data according to the reception procedure and the RRC procedure delay of system information blocks defined in TS 38.331 [2] for an NR cell.

$T_{SI-EUTRA}$ is the time required for receiving all the relevant system information data according to the reception procedure and the RRC procedure delay of system information blocks defined in TS 36.331 [16] for an E-UTRAN cell.

These requirements assume sufficient radio conditions, so that decoding of system information can be made without errors and does not take into account cell re-selection failure.

4.2.2.7 General requirements

The UE shall search every layer of higher priority at least every $T_{higher_priority_search} = (60 * N_{layers})$ seconds, where N_{layers} is the total number of higher priority NR and E-UTRA carrier frequencies broadcasted in system information.

For a UE configured with early measurement reporting, while T331 is running, N_{layers} is the combined total number of higher priority NR and E-UTRA carrier frequencies broadcasted in system information and carriers configured for idle mode CA measurements.

Note: combined total number means that if a carrier is a high priority carrier and additionally a carrier configured for idle mode CA measurements, it only counts as one carrier.

4.2.2.8 Minimum requirement at transitions

When switching from low mobility scenario or not-at-cell-edge scenario to low mobility and not-at-cell-edge scenario during cell-reselection period, the UE shall fulfill the requirements corresponding to low mobility scenario or not-at-cell-edge scenario over measurement period ($T_{relaxed}$) and thereafter switch to requirements corresponding to low mobility and not-at-cell-edge scenario. The measurement period, $T_{relaxed}$, is any of:

- $T_{measure,NR_Intra}$ and $T_{evaluate,NR_Intra,}$ defined in section 4.2.2.9 for intra-frequency measurements on NR cells,
- $T_{measure,NR_Inter}$ and $T_{evaluate,NR_Inter}$ defined in section 4.2.2.10 for inter-frequency measurements on NR cells and
- $T_{measure,EUTRAN}$ and $T_{evaluate,EUTRAN}$ defined in sections 4.2.2.11 for inter-RAT E-UTRAN measurements.

When switching from low mobility and not-at-cell-edge scenario to low mobility scenario or not-at-cell-edge scenario during cell-reselection period, the UE shall fulfill the requirements corresponding to low mobility scenario or not-at-cell-edge scenario upon fulfilling the switching criteria.

When switching from normal mode to low mobility scenario or not-at-cell-edge scenario or low mobility and not-at-cell-edge scenario during cell-reselection period, the UE shall fulfill the requirements corresponding to normal mode over measurement period (T_{normal}) and thereafter switch to requirements corresponding to low mobility scenario or not-at-cell-edge scenario or low mobility and not-at-cell-edge scenario. The measurement period, T_{normal}, is any of:

- $T_{measure,NR_Intra}$ and $T_{evaluate,NR_Intra,}$ defined in section 4.2.2.3 for intra-frequency measurements on NR cells,
- $T_{measure,NR_Inter}$ and $T_{evaluate,NR_Inter}$ defined in section 4.2.2.4 for inter-frequency measurements on NR cells and
- $T_{measure,EUTRAN}$ and $T_{evaluate,EUTRAN}$ defined in sections 4.2.2.5 for inter-RAT E-UTRAN measurements.

When switching from low mobility scenario or not-at-cell-edge scenario or low mobility and not-at-cell-edge scenario to normal mode during cell-reselection period, the UE shall fulfill the requirements corresponding to normal mode upon fulfilling the switching criteria.

No requirement is defined for multiple transitions of scenarios within one measurement period.

4.2.2.9 Measurements of intra-frequency NR cells for UE configured with relaxed measurement criterion

4.2.2.9.1 Introduction

This clause contains the requirements for measurements on intra-frequency NR cells when Srxlev ≤ $S_{IntraSearchP}$ or Squal ≤ $S_{IntraSearchQ}$ and when the UE is configured any of the following relaxed measurement critera:

- Relaxed measurement criterion for UE with low mobility defined in clause 5.2.4.9.1 in [1],
- Relaxed measurement criterion for UE not-at-cell edge defined in clause 5.2.4.9.2 in [1],
- Both low mobility criterion and not-at-cell edge criterion as defined in clauses 5.2.4.9.1 and 5.2.4.9.2 in [1] respectively.

4.2.2.9.2 Measurements for UE fulfilling low mobility criterion

This clause contains requirements for measurements on intra-frequency NR cells provided that:

- UE is configured with *lowMobilityEvaluation* [2] criterion and UE has fulfilled, or
- UE is configured with both *lowMobilityEvaluation* [2] criterion and *cellEdgeEvaluation* [2] criterion and *combineRelaxedMeasCondition* [2] not configured, and UE has fulfilled only the *lowMobilityEvaluation* [2] criterion.

The requirements defined in clause 4.2.2.3 apply for this clause except that:

- T_{detect,NR_Intra} as specified in Table 4.2.2.9. 2-1.
- $T_{measure,NR_Intra}$ as specified in Table 4.2.2.9. 2-1.
- $T_{evaluate,NR_Intra}$ as specified in Table 4.2.2.9. 2-1.

Table 4.2.2.9.2-1: T_{detect,NR_Intra}, $T_{measure,NR_Intra}$ and $T_{evaluate,NR_Intra}$

DRX cycle length [s]	Scaling Factor (N1)			T_{detect,NR_Intra} [s] (number of DRX cycles)	$T_{measure,NR_Intra}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Intra}$ [s] (number of DRX cycles)
	FR1	FR2-1 Note1	FR2-2 Note2			
0.32	1	8	12	11.52 x N1 x M2 x K1 (36 x N1 x M2 x K1)	1.28 x N1 x M2 x K1 (4 x N1 x M2 x K1)	5.12 x N1 x M2 x K1 (16 x N1 x M2 x K1)
0.64		5	8	17.92 x N1 x K1 (28 x N1 x K1)	1.28 x N1 x K1 (2 x N1 x K1)	5.12 x N1 x K1 (8 x N1 x K1)
1.28		4	6	32 x N1 x K1 (25 x N1 x K1)	1.28 x N1 x K1 (1 x N1 x K1)	6.4 x N1 x K1 (5 x N1 x K1)
2.56		3	5	58.88 x N1 x K1 (23 x N1 x K1)	2.56 x N1 x K1 (1 x N1 x K1)	7.68 x N1 x K1 (3 x N1 x K1)

Note 1: Applies for UE supporting FR2-1 power class 2&3&4. For UE supporting FR2-1 power class 1 or 5, N1 = 8 for all DRX cycle length.
Note 2: Applies for UE supporting FR2-2 power class 2&3. For UE supporting FR2-2 power class 1, N1 = 12 for all DRX cycle length.
Note 3: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1. If high layer signalling *smtc2-LP-r16* is configured, for cells indicated in the *pci-List* parameter in *smtc2-LP-r16*, the SMTC periodicity corresponds to the value of higher layer parameter *smtc2-LP-r16*; for the other cells, the SMTC periodicity corresponds to the value of higher layer parameter *smtc*.
Note 4: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the *lowMobilityEvaluation* [2] criterion.

4.2.2.9.3 Measurements for UE fulfilling not-at-cell edge criterion

This clause contains requirements for measurements on intra-frequency NR cells provided that:

- UE is configured with *cellEdgeEvaluation* [2] criterion and UE has fulfilled, or
- UE is configured with both *lowMobilityEvaluation* [2] criterion and *cellEdgeEvaluation* [2] criteria and *combineRelaxedMeasCondition* [2] not configured, and UE has fulfilled only the *cellEdgeEvaluation* [2] criterion.

The requirements defined in clause 4.2.2.3 apply for this clause except that:

- T_{detect,NR_Intra} as specified in Table 4.2.2.9.3-1.
- $T_{measure,NR_Intra}$ as specified in Table 4.2.2.9.3-1.
- $T_{evaluate,NR_Intra}$ as specified in Table 4.2.2.9.3-1.

Table 4.2.2.9.3-1: T_{detect,NR_Intra}, $T_{measure,NR_Intra}$ and $T_{evaluate,NR_Intra}$

DRX cycle length [s]	Scaling Factor (N1)			T_{detect,NR_Intra} [s] (number of DRX cycles)	$T_{measure,NR_Intra}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Intra}$ [s] (number of DRX cycles)
	FR1	FR2-1 Note1	FR2-2 Note2			
0.32	1	8	12	11.52 x N1 x M2 x K1 (36 x N1 x M2 x K1)	1.28 x N1 x M2 x K1 (4 x N1 x M2 x K1)	5.12 x N1 x M2 x K1 (16 x N1 x M2 x K1)
0.64		5	8	17.92 x N1 x K1 (28 x N1 x K1)	1.28 x N1 x K1 (2 x N1 x K1)	5.12 x N1 x K1 (8 x N1 x K1)
1.28		4	6	32 x N1 x K1 (25 x N1 x K1)	1.28 x N1 x K1 (1 x N1 x K1)	6.4 x N1 x K1 (5 x N1 x K1)
2.56		3	5	58.88 x N1 x K1 (23 x N1 x K1)	2.56 x N1 x K1 (1 x N1 x K1)	7.68 x N1 x K1 (3 x N1 x K1)

Note 1: Applies for UE supporting FR2-1 power class 2&3&4. For UE supporting FR2-1 power class 1 or 5, N1 = 8 for all DRX cycle length.
Note 2: Applies for UE supporting FR2-2 power class 2&3. For UE supporting FR2-2 power class 1, N1 = 12 for all DRX cycle length.
Note 3: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1. If high layer signalling *smtc2-LP-r16* is configured, for cells indicated in the *pci-List* parameter in *smtc2-LP-r16*, the SMTC periodicity corresponds to the value of higher layer parameter *smtc2-LP-r16*; for the other cells, the SMTC periodicity corresponds to the value of higher layer parameter *smtc*.
Note 4: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the *cellEdgeEvaluation* [2] criterion.

4.2.2.9.4 Measurements for UE fulfilling low mobility and not-at-cell edge criteria

This clause contains requirements for measurements on intra-frequency NR cells provided that:

- UE is configured with both *lowMobilityEvaluation* [2] criterion and *cellEdgeEvaluation* [2] criterion, and
- has also fulfilled both criteria, and
- less than 1 hour have passed since measurements for cell reselection were last performed

In this case the UE is not required to meet T_{detect,NR_Intra}, $T_{measure,NR_Intra}$ and $T_{evaluate,NR_Intra}$ as defined in Table 4.2.2.3-1.

4.2.2.10 Measurements of inter-frequency NR cells for UE configured with relaxed measurement criterion

4.2.2.10.1 Introduction

This clause contains the requirements for measurements on inter-frequency NR cells when the UE is configured with any of following relaxed measurement criteria:

- Relaxed measurement criterion for UE with low mobility defined in clause 5.2.4.9.1 in [1],

- Relaxed measurement criterion for UE not-at-cell edge defined in clause 5.2.4. 9.2 in [1],
- Both low mobility criterion and not-at-cell edge criterion as defined in clauses 5.2.4. 9.1 and 5.2.4.9.2 in [1] respectively.

4.2.2.10.2 Measurements for UE fulfilling low mobility criterion

This clause contains requirements for measurements on inter-frequency NR cells provided that:

- UE is configured with *lowMobilityEvaluation* [2] criterion and UE has fulfilled, or
- UE is configured with both *lowMobilityEvaluation* [2] and *cellEdgeEvaluation* [2] criterion and *combineRelaxedMeasCondition* [2] not configured, and
- UE has fulfilled only the *lowMobilityEvaluation* [2] criterion.

The UE shall not relax measurements on NR inter-frequency carriers configured for idle mode CA/DC measurements (defined in clause 4.4) while T331 is running.

When Srxlev $\leq S_{nonIntraSearchP}$ or Squal $\leq S_{nonIntraSearchQ}$ then the requirements are defined as follows:

- $T_{detect,NR_Inter_Relax}$ as specified in Table 4.2.2.10.2-1.
- $T_{measure,NR_Inter_Relax}$ as specified in Table 4.2.2.10.2-1.
- $T_{evaluate,NR_Inter_Relax}$ as specified in Table 4.2.2.10.2-1.
- The UE shall be able to evaluate whether a newly detectable inter-frequency NR cell meets the reselection criteria defined in TS38.304 [1] within $N_{carrier_Relax} * T_{detect,NR_Inter_Relax} + N_{carrier_Non_relax} * T_{detect,NR_Inter}$. Cells which have been detected shall be measured at least every $N_{carrier_Relax} * T_{measure,NR_Inter_Relax} + N_{carrier_Non_relax} * T_{measure,NR_Inter}$. The UE shall be able to evaluate that an already identified inter-frequency NR cell has met reselection criterion defined in TS 38.304 [1] within $N_{carrier_Relax} * T_{evaluate,NR_Inter_Relax} + N_{carrier_Non_relax} * T_{evaluate,NR_Inter}$.
- When T331 is running,
  - The parameter $N_{carrier_Relax}$ is the total number of NR inter-frequency carriers not configured for idle mode CA/DC measurements.
  - The parameter $N_{carrier_Non_relax}$ is the total number of NR inter-frequency carriers configured for idle mode CA/DC measurements.
- When T331 is not running,
  - The parameter $N_{carrier_Relax}$ is the total number of inter-frequency carriers configured for mobility measurements only and the number of inter-frequency carriers configured for both mobility measurement and idle mode CA/DC measurements.
- The parameter $N_{carrier_Non_relax}$ =0.When Srxlev > $S_{nonIntraSearchP}$ and Squal > $S_{nonIntraSearchQ}$ and the UE is configured with *highPriorityMeasRelax* [2] then the UE shall search for inter-frequency layers of higher priority at least every $K2*T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in clause 4.2.2.7 and, K2 = 60. Otherwise if the UE is not configured with *highPriorityMeasRelax* [2] then the UE shall search for inter-frequency layers of higher priority at least every $T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in clause 4.2.2.7.

Table 4.2.2.10.2-1: $T_{detect,NR_Inter_Relax}$, $T_{measure,NR_Inter_Relax}$ and $T_{evaluate,NR_Inter_Relax}$

DRX cycle length [s]	Scaling Factor (N1)			T_{detect,NR_Inter} [s] (number of DRX cycles)	$T_{measure,NR_Inter}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Inter}$ [s] (number of DRX cycles)
	FR1	FR2-1 Note1	FR2-2 Note2			
0.32	1	8	12	11.52 x N1 x K1 x 1.5 (36 x N1 x K1 x 1.5)	1.28 x N1 x K1x 1.5 (4 x N1 x K1 x 1.5)	5.12 x N1 x K1x 1.5 (16 x N1 x K1 x 1.5)
0.64		5	8	17.92x N1 x K1 (28 x N1 x K1)	1.28 x N1 x K1 (2 x N1 x K1)	5.12 x N1 x K1 (8 x N1 x K1)

1.28		4	6	32 x N1 x K1 (25 x N1 x K1)	1.28 x N1 x K1 (1 x N1 x K1)	6.4 x N1 x K1 (5 x N1 x K1)
2.56		3	5	58.88 x N1 x K1 (23 x N1 x K1)	2.56 x N1 x K1 (1 x N1 x K1)	7.68 x N1 x K1 (3 x N1 x K1)
Note 1: Applies for UE supporting FR2-1 power class 2&3&4. For UE supporting FR2-1 power class 1 or 5, N1 = 8 for all DRX cycle length. Note 2: Applies for UE supporting FR2-2 power class 2&3. For UE supporting FR2-2 power class 1, N1 = 12 for all DRX cycle length. Note 3: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the low mobility.						

4.2.2.10.3 Measurements for UE fulfilling not-at-cell edge criterion

This clause contains requirements for measurements on inter-frequency NR cells provided that:

- UE is configured with *cellEdgeEvaluation* [2] criterion, and UE has fulfilled or
- UE is configured with both *lowMobilityEvaluation* [2] criterion and *cellEdgeEvaluation* [2] criterion and *combineRelaxedMeasCondition* [2] not configured, and
- UE has fulfilled only the *cellEdgeEvaluation* [2] criterion.

The UE shall not relax measurements on NR inter-frequency carriers configured for idle mode CA/DC measurements (defined in clause 4.4) while T331 is running.

When Srxlev $\leq S_{nonIntraSearchP}$ or Squal $\leq S_{nonIntraSearchQ}$ then the requirements defined in clause 4.2.2.4 apply for this clause except that:

- $T_{detect,NR_Inter_Relax}$ as specified in Table 4.2.2.10.3-1.
- $T_{measure,NR_Inter_Relax}$ as specified in Table 4.2.2.10.3-1.
- $T_{evaluate,NR_Inter_Relax}$ as specified in Table 4.2.2.10.3-1.
- The UE shall be able to evaluate whether a newly detectable inter-frequency NR cell meets the reselection criteria defined in TS38.304 [1] within $N_{carrier_Relax} * T_{detect,NR_Inter_Relax} + N_{carrier_Non_relax} * T_{detect,NR_Inter}$. Cells which have been detected shall be measured at least every $N_{carrier_Relax} * T_{measure,NR_Inter_Relax} + N_{carrier_Non_relax} * T_{measure,NR_Inter}$. The UE shall be able to evaluate that an already identified inter-frequency NR cell has met reselection criterion defined in TS 38.304 [1] within $N_{carrier_Relax} * T_{evaluate,NR_Inter_Relax} + N_{carrier_Non_relax} * T_{evaluate,NR_Inter}$.
- When T331 is running,
  - The parameter $N_{carrier_Relax}$ is the total number of NR inter-frequency carriers not configured for idle mode CA/DC measurements.
  - The parameter $N_{carrier_Non_relax}$ is the total number of NR inter-frequency carriers configured for idle mode CA/DC measurements.
- When T331 is not running,
  - The parameter $N_{carrier_Relax}$ is the total number of inter-frequency carriers configured for mobility measurements only and the number of inter-frequency carriers configured for both mobility measurement and idle mode CA/DC measurements. - The parameter $N_{carrier_Non_relax}$ =0.

When Srxlev > SnonIntraSearchP and Squal > SnonIntraSearchQ and regardless of whether the UE is configured with *highPriorityMeasRelax* [2] or not, the UE shall search for inter-frequency layers of higher priority at least every $T_{higher_priority}$_search where $T_{higher_priority_search}$ is described in clause 4.2.2.7

Table 4.2.2.10.3-1: $T_{detect,NR_Inter_Relax}$, $T_{measure,NR_Inter_Relax}$ and $T_{evaluate,NR_Inter_Relax}$

DRX cycle length [s]	Scaling Factor (N1)			T_{detect,NR_Inter} [s] (number of DRX cycles)	$T_{measure,NR_Inter}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Inter}$ [s] (number of DRX cycles)
	FR1	FR2-1 Note1	FR2-2 Note2			

0.32	1	8	12	11.52 x N1 x K1 x 1.5 (36 x N1 x K1 x 1.5)	1.28 x N1 x K1 x 1.5 (4 x N1 x K1 x 1.5)	5.12 x N1 x K1 x 1.5 (16 x N1 x K1 x 1.5)
0.64		5	8	17.92x N1 x K1 (28 x N1 x K1)	1.28 x N1 x K1 (2 x N1 x K1)	5.12 x N1 x K1 (8 x N1 x K1)
1.28		4	6	32 x N1 x K1 (25 x N1 x K1)	1.28 x N1 x K1 (1 x N1 x K1)	6.4 x N1 x K1 (5 x N1 x K1)
2.56		3	5	58.88 x N1 x K1 (23 x N1 x K1)	2.56 x N1 x K1 (1 x N1 x K1)	7.68 x N1 x K1 (3 x N1 x K1)
Note 1: Applies for UE supporting FR2-1 power class 2&3&4. For UE supporting FR2-1 power class 1 or 5, N1 = 8 for all DRX cycle length. Note 2: Applies for UE supporting FR2-2 power class 2&3. For UE supporting FR2-2 power class 1, N1 = 12 for all DRX cycle length. Note 3: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the *cellEdgeEvaluation* [2] criterion.						

4.2.2.10.4 Measurements for UE fulfilling low mobility and not-at-cell edge criterion

This clause contains requirements for measurements on inter-frequency NR cells provided that:

- T331 timer is not running for EMR measurements on inter-frequency NR carrier, and
- UE is configured with both *lowMobilityEvaluation* [2] criterion and *cellEdgeEvaluation* [2] criterion, and
- Has also fulfilled both criteria

In this case the UE is not required to meet T_{detect,NR_Inter}, $T_{measure,NR_Inter}$ and $T_{evaluate,NR_Inter}$ as defined in Table 4.2.2.4-1.

When Srxlev $\leq S_{nonIntraSearchP}$ or Squal $\leq S_{nonIntraSearchQ}$, the UE shall search for, measure and evaluate inter-frequency layers of higher, equal or lower priority at least every 1 hour.

When Srxlev > $S_{nonIntraSearchP}$ and Squal > $S_{nonIntraSearchQ}$, the UE shall search for inter-frequency layers of higher priority at least every $K2*T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in clause 4.2.2.7 and K2=60.

4.2.2.11 Measurements of inter-RAT E-UTRAN cells for UE configured with relaxed measurement criterion

4.2.2.11.1 Introduction

This clause contains the requirements for measurements on inter-RAT E-UTRAN cells when the UE is configured with any of following relaxed measurement critera:

- Relaxed measurement criterion for UE with low mobility defined in clause 5.2.4.9.1 in [1],
- Relaxed measurement criterion for UE not-at-cell edge defined in clause 5.2.4.9.2 in [1],
- Both low mobility criterion and not-at-cell edge criterion as defined in clauses 5.2.4.9.1 and 5.2.4.9.2 in [1] respectively.

4.2.2.11.2 Measurements for UE fulfilling low mobility criterion

This clause contains requirements for measurements on inter-RAT E-UTRAN cells provided that:

- T331 timer is not running for EMR measurements on inter-RAT E-UTRAN, and
- UE is configured with *lowMobilityEvaluation* [2] criterion and UE has fulfilled, or
- UE is configured with both *lowMobilityEvaluation* [2] criterion and *cellEdgeEvaluation* [2] criterion and *combineRelaxedMeasCondition* [2] not configured, and
- UE has fulfilled only the *lowMobilityEvaluation* [2] criterion.

The UE shall not relax measurements on inter-RAT E-UTRAN carriers configured for idle mode CA/DC measurements (defined in clause 4.4) while T331 is running.

When Srxlev ≤ $S_{nonIntraSearchP}$ or Squal ≤ $S_{nonIntraSearchQ}$ then the requirements defined in clause 4.2.2.5 apply for this clause except that:

- $T_{detect,EUTRAN_Relax}$ as specified in Table 4.2.2.11.2-1.
- $T_{measure,EUTRAN_Relax}$ as specified in Table 4.2.2.11.2-1.
- $T_{evaluate,EUTRAN_Relax}$ as specified in Table 4.2.2.11.2-1.
- The UE shall be able to evaluate whether a newly detectable inter-RAT E-UTRAN cell meets the reselection criteria defined in TS38.304 [1] within $N_{carrier_Relax} * T_{detect,EUTRAN_Relax} + N_{carrier_Non_relax} * T_{detect,EUTRAN}$. Cells which have been detected shall be measured at least every $N_{carrier_Relax} * T_{measure,EUTRAN_Relax} + N_{carrier_Non_relax} * T_{measure,EUTRAN}$. The UE shall be able to evaluate that an already identified inter-RAT E-UTRAN cell has met reselection criterion defined in TS 38.304 [1] within $N_{EUTRAN\ carrier_Relax} * T_{evaluate,EUTRAN_Relax} + N_{EUTRAN\ carrier_Non_relax} * T_{evaluate,EUTRAN}$.
- When T331 is running,
  - The parameter $N_{carrier_Relax}$ is the total number of inter-RAT E-UTRAN carriers not configured for idle mode CA/DC measurements.
  - The parameter $N_{carrier_Non_relax}$ is the total number of inter-RAT E-UTRAN carriers configured for idle mode CA/DC measurements.
- When T331 is not running,
  - The parameter $N_{carrier_Relax}$ is the total number of inter-RAT E-UTRAN carriers configured for mobility measurements only and the number of inter-RAT E-UTRAN carriers configured for both mobility measurement and idle mode CA/DC measurements.
  - The parameter $N_{carrier_Non_relax}$ =0.

When Srxlev > $S_{nonIntraSearchP}$ and Squal > $S_{nonIntraSearchQ}$ and the UE is configured with *highPriorityMeasRelax* [2] then the UE shall search for E-UTRA inter-RAT frequency layers of higher priority at least every $K2*T_{higher_priority_search}$ seconds where $T_{higher_priority_search}$ is described in clause 4.2.2.7 and, K2 = 60. Otherwise if the UE is not configured with *highPriorityMeasRelax* [2] then the UE shall search for E-UTRA inter-RAT frequency layers of higher priority at least every $T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in clause 4.2.2.7.

Table 4.2.2.11.2-1: $T_{detect,EUTRAN_Relax}$, $T_{measure,EUTRAN_Relax}$, and $T_{evaluate,EUTRAN_Relax}$

DRX cycle length [s]	$T_{detect,EUTRAN_Relax}$ [s] (number of DRX cycles)	$T_{measure,EUTRAN_Relax}$ [s] (number of DRX cycles)	$T_{evaluate,EUTRAN_Relax}$ [s] (number of DRX cycles)
0.32	11.52 x K1 (36 x K1)	1.28 x K1 (4 x K1)	5.12 x K1 (16 x K1)
0.64	17.92 x K1 (28 x K1)	1.28 x K1 (2 x K1)	5.12 x K1 (8 x K1)
1.28	32 x K1 (25 x K1)	1.28 x K1 (1 x K1)	6.4 x K1 (5 x K1)
2.56	58.88 x K1 (23 x K1)	2.56 x K1 (1 x K1)	7.68 x K1 (3 x K1)
Note 1: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the *lowMobilityEvaluation* [2] criterion.			

4.2.2.11.3 Measurements for UE fulfilling with not-at-cell edge criterion

This clause contains requirements for measurements on inter-RAT E-UTRAN cells provided that:

- T331 timer is not running for EMR measurements on inter-RAT E-UTRAN, and
- UE is configured with *cellEdgeEvaluation* [2] criterion and UE has fulfilled, or
- UE is configured with both *lowMobilityEvaluation* [2] criterion and *cellEdgeEvaluation* [2] criterion and *combineRelaxedMeasCondition* [2] not configured, and
- UE has fulfilled only the *cellEdgeEvaluation* [2] criterion.

The UE shall not relax measurements on inter-RAT E-UTRAN carriers configured for idle mode CA/DC measurements (defined in clause 4.4) while T331 is running.

When Srxlev ≤ $S_{nonIntraSearchP}$ or Squal ≤ $S_{nonIntraSearchQ}$ then the requirements defined in clause 4.2.2.5 apply for this clause except that:

- $T_{detect,EUTRAN_Relax}$ as specified in Table 4.2.2.11.3-1.
- $T_{measure,EUTRAN_Relax}$ as specified in Table 4.2.2.11.3-1.
- $T_{evaluate,EUTRAN_Relax}$ as specified in Table 4.2.2.11.3-1.
- The UE shall be able to evaluate whether a newly detectable inter-RAT E-UTRAN cell meets the reselection criteria defined in TS38.304 [1] within $N_{carrier_Relax} * T_{detect,EUTRAN_Relax} + N_{carrier_Non_relax} * T_{detect,EUTRAN}$. Cells which have been detected shall be measured at least every $N_{carrier_Relax} * T_{measure,EUTRAN_Relax} + N_{carrier_Non_relax} * T_{measure,EUTRAN}$. The UE shall be able to evaluate that an already identified inter-RAT E-UTRAN cell has met reselection criterion defined in TS 38.304 [1] within $N_{EUTRAN\ carrier_Relax} * T_{evaluate,EUTRAN_Relax} + N_{EUTRAN\ carrier_Non_relax} * T_{evaluate,EUTRAN}$.
- When T331 is running,
  - The parameter $N_{carrier_Relax}$ is the total number of inter-RAT E-UTRAN carriers not configured for idle mode CA/DC measurements.
  - The parameter $N_{carrier_Non_relax}$ is the total number of inter-RAT E-UTRAN carriers configured for idle mode CA/DC measurements.
- When T331 is not running,
  - The parameter $N_{carrier_Relax}$ is the total number of inter-RAT E-UTRAN carriers configured for mobility measurements only and the number of inter-RAT E-UTRAN carriers configured for both mobility measurement and idle mode CA/DC measurements.
  - The parameter $N_{carrier_Non_relax}$ =0.

When Srxlev > $S_{nonIntraSearchP}$ and Squal > $S_{nonIntraSearchQ}$ and regardless of whether the UE is configured with *highPriorityMeasRelax* [2] or not, the UE shall search for inter-RAT E-UTRAN frequency layers of higher priority at least every $T_{higher_priority_}$search where $T_{higher_priority_search}$ is described in clause 4.2.2.7.

Table 4.2.2.11.3-1: $T_{detect,EUTRAN_Relax}$, $T_{measure,EUTRAN_Relax}$, and $T_{evaluate,EUTRAN_Relax}$

DRX cycle length [s]	$T_{detect,EUTRAN}$ [s] (number of DRX cycles)	$T_{measure,EUTRAN}$ [s] (number of DRX cycles)	$T_{evaluate,EUTRAN}$ [s] (number of DRX cycles)
0.32	11.52 x K1 (36 x K1)	1.28 x K1 (4 x K1)	5.12 x K1 (16 x K1)
0.64	17.92 x K1 (28 x K1)	1.28 x K1 (2 x K1)	5.12 x K1 (8 x K1)
1.28	32 x K1 (25 x K1)	1.28 x K1 (1 x K1)	6.4 x K1 (5 x K1)
2.56	58.88 x K1 (23 x K1)	2.56 x K1 (1 x K1)	7.68 x K1 (3 x K1)
Note 1: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the *cellEdgeEvaluation* [2] criterion.			

4.2.2.11.4 Measurements for UE fulfilling low mobility and not-at-cell edge criterion

This clause contains requirements for measurements on inter-RAT E-UTRAN cells provided that:

- T331 timer is not running for EMR measurements on inter-RAT E-UTRAN, and
- UE is configured with both *lowMobilityEvaluation* [2] criterion and *cellEdgeEvaluation* [2] criterion, and
- has also fulfilled both criteria

In this case the UE is not required to meet $T_{detect,EUTRAN}$, $T_{measure,EUTRAN}$ and $T_{evaluate,EUTRAN}$ as defined in Table 4.2.2.5-1.

When Srxlev ≤ $S_{nonIntraSearchP}$ or Squal ≤ $S_{nonIntraSearchQ}$, the UE shall search for, measure and evaluate inter-RAT E-UTRAN layers of higher or lower priority at least every 1 hour.

When Srxlev > $S_{nonIntraSearchP}$ and Squal > $S_{nonIntraSearchQ}$, the UE shall search for inter-RAT E-UTRAN of higher priority at least every K2*$T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in clause 4.2.2.7 and K2=60.

4.2A Cell Re-selection when subject to CCA

4.2A.1 Introduction

The cell reselection procedure allows the UE to select a more suitable cell and camp on it. The requirements in clauses 4.2A.2.3, 4.2A.2.4, and 4.2A.2.6, apply when at least the target cell is on a carrier frequency subject to CCA, and the requirements in clauses 4.2A.2.2, and 4.2A.2.5 apply when at least the camping cell is on a carrier frequency subject to CCA.

When the UE is in either *Camped Normally* state or *Camped on Any Cell* state on a cell, the UE shall attempt to detect, synchronise, and monitor intra-frequency, inter-frequency and inter-RAT cells indicated by the serving cell. For intra-frequency and inter-frequency cells the serving cell may not provide explicit neighbour list but carrier frequency information and bandwidth information only. UE measurement activity is also controlled by measurement rules defined in TS 38.304, allowing the UE to limit its measurement activity.

In the requirements of clause 4.2A, the exceptions for side conditions apply as follows:

- for the UE capable of CA, the applicable exceptions for side conditions are specified in Annex B, clause B.x.y for UE supporting CA in FR1.

In the requirements of clause 4.2A.2, the term SMTC occasion not available at the UE refers to when the SMTC contains SSBs configured by gNB in a cell on a carrier frequency subject to CCA, but *N* candidate SSB positions for the same SS/PBCH block index within the discovery burst transmission window are not available at the UE due to DL CCA failures at gNB during the corresponding detection, measurement, or evaluation period, where:

- For the cell detection procedure: *N* is at least one candidate SSB position (NOTE: the one candidate SSB position for the cell detection shall not be impacted by the set of candidate SSB positions which are already being measured by the UE within the current measurement period of the on-going measurements), and

- For other procedures in clause 4.2A.2: *N* are the first two successive candidate SSB positions when two or more candidate SSB positions are configured for this SSB index in one discovery burst transmission window, otherwise N is one candidate SSB position;

otherwise the SMTC occasion is considered as available at the UE.

4.2A.2 Requirements

4.2A.2.1 UE measurement capability

For idle mode cell re-selection purposes, the UE shall be capable of monitoring at least:

- Intra-frequency carrier, and

- Depending on UE capability, 7 NR inter-frequency carriers, and

- Depending on UE capability, 7 FDD E-UTRA inter-RAT carriers, and

- Depending on UE capability, 7 TDD E-UTRA inter-RAT carriers.

In addition to the requirements defined above, a UE supporting E-UTRA measurements in RRC_IDLE state shall be capable of monitoring a total of at least 14 carrier frequency layers, which includes serving layer, comprising of any above defined combination of E-UTRA FDD, E-UTRA TDD and NR layers. The inter-frequency carriers include carriers on unlicensed band and/or licensed band.

4.2A.2.2 Measurement and evaluation when subject to CCA on the serving cell

The UE shall measure the SS-RSRP and SS-RSRQ level of the serving cell and evaluate the cell selection criterion S defined in TS 38.304 [1] for the serving cell at least once every $(1+M_n)*M1*N1$ DRX cycles in N_{serv_CCA} consecutive DRX cycles; where:

- M1=2 if SMTC periodicity (T_{SMTC}) > 20 ms and DRX cycle $\leq$ 0.64 second,
- otherwise M1=1.
- $N1*M_n$ is the maximum separation in DRX cycles between two measurements that are used for filtering.

The UE shall filter the SS-RSRP and SS-RSRQ measurements of the serving cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by, at least DRX cycle/2 but not separated in time by more than $N1*M_n$, where M_n=2.

If the UE has evaluated according to Table 4.2A.2.2-1 in N_{serv_CCA} consecutive DRX cycles that the serving cell does not fulfil the cell selection criterion S, the UE shall initiate the measurements of all neighbour cells indicated by the serving cell, regardless of the measurement rules currently limiting UE measurement activities.

UE shall initiate measurements on neighbour cells indicated by the serving cell if it is unable to measure on the serving cell for at least $N1*M_p$ consecutive number of DRX cycles each with at least one SMTC occasion not available at the UE, where M_p=4 when DRX cycle length <1.28 s, M_p=2 when DRX cycle length ≥1.28 s.

UE shall initiate the measurements on neighbour cells of any intra-frequency or inter-frequency if it is unable to measure on serving cell during at least consecutive $N1*M_q$ number of DRX cycles each with at least one SMTC occasion not available at the UE, regardless of any condition of $S_{nonIntraSearchP}$ and $S_{nonIntraSearchQ}$, where M_q=8 when DRX cycle length <1.28 s, M_q=4 when DRX cycle length ≥1.28 s.

If the UE in RRC_IDLE has not found any new suitable cell based on searches and measurements using the intra-frequency, inter-frequency and inter-RAT information indicated in the system information for 10 s, the UE shall initiate cell selection procedures for the selected PLMN as defined in TS 38.304 [1].

Table 4.2A.2.2-1: N_{serv_CCA}

DRX cycle length [s]	Scaling Factor (N1)		N_{serv_CCA} [number of DRX cycles]
	FR1	FR2-2 Note 3	
0.32	1	12	$N1*M1*(4+ M_s)$
0.64		8	$N1*M1*(4+ M_s)$
1.28		6	$N1*(2+M_s)$
2.56		5	$N1*(2+M_s)$
Note 1: Ms is the number of groups of consecutive N1 DRX cycles each group with at least one SMTC occasion not available at the UE during N_{serv_CCA}, and $M_s < M_{s,max}$			
Note 2: $M_{s,max}$=8 for DRX cycle length < 1.28 s, $M_{s,max}$= 4 for DRX cycle length ≥ 1.28 s.			
Note 3: Applies for UE supporting FR2-2 power class 2&3. For UE supporting FR2-2 power class 1, N1 = 12 for all DRX cycle length.			

The UE shall restart the measurements used for serving cell evaluation if M_s exceeds $M_{s,max}$.

4.2A.2.3 Measurements of intra-frequency NR cells when subject to CCA on the serving cell and target cell

The UE shall be able to identify new intra-frequency cells with CCA and perform SS-RSRP and SS-RSRQ measurements of the identified intra-frequency cells without an explicit intra-frequency neighbour list containing physical layer cell identities.

When the intra-frequency measurement is performed on a neighbour cell in FR2-2 with shared spectrum channel access, UE shall determine the CCA mode of the neighbour cell according to *channelAccessMode2-r17*of the cell configured in *SIB3*. If *channelAccessMode2-r17* of the cell is enabled, UE shall assume that CCA applies to the cell and perform measurement accordingly, and the requirements in clause 4.2A.2.3 shall apply; otherwise, UE shall assume that CCA does not apply to the cell and perform measurement accordingly, and requirements in 4.2.2.3 shall apply.

The UE shall be able to evaluate whether a newly detectable intra-frequency cell meets the reselection criteria defined in TS38.304 within T_{detect,NR_Intra_CCA} when that $T_{reselection}$= 0 . An intra frequency cell is considered to be detectable according to the conditions defined in Annex B. 2. 8 for a corresponding Band.

The UE shall measure SS-RSRP and SS-RSRQ at least every $T_{measure,NR_Intra_CCA}$ (see table 4.2A.2.3-1) for intra-frequency cells that are identified and measured according to the measurement rules. For a cell that is already identified, after 2 unsuccessful measurement attempts due to exceeding the maximum number of SMTC occasions not available at the UE, the UE shall detect cells on any of the configured serving- and/or non-serving carriers.

The UE shall filter SS-RSRP and SS-RSRQ measurements of each measured intra-frequency cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least $T_{measure,NR_Intra_CCA}/2$.

The UE shall not consider a NR neighbour cell in cell reselection, if it is indicated as not allowed in the measurement control system information of the serving cell.

For an intra-frequency cell that has been already detected, but that has not been reselected to, the filtering shall be such that the UE shall be capable of evaluating that the intra-frequency cell has met reselection criterion defined [1] within $T_{evaluate,NR_Intra_CCA}$ when $T_{reselection}$ = 0 as specified in table 4.2A.2.3-1 provided that:

when *rangeToBestCell* is not configured:

- the cell is at least 3dB better ranked in FR1 or [4.5]dB better ranked in FR2-2.

when *rangeToBestCell* is configured:

- the cell has the highest number of beams above the threshold *absThreshSS-BlocksConsolidation* among all detected cells whose cell-ranking criterion R value [1] is within *rangeToBestCell* of the cell-ranking criterion R value of the highest ranked cell.
    - if there are multiple such cells, the cell has the highest rank among them.
        - the cell is at least 3dB better ranked in FR1 or [4.5]dB better ranked in FR2-2 if the current serving cell is among them.

When evaluating cells for reselection, the SSB side conditions apply to both serving and non-serving intra-frequency cells.

If $T_{reselection}$ timer has a non-zero value and the intra-frequency cell is satisfied with the reselection criteria, which are defined in TS38.304 [1], the UE shall evaluate this intra-frequency cell for the $T_{reselection}$ time. If this cell remains satisfied with the reselection criteria within this duration, then the UE shall reselect that cell.

Table 4.2A.2.3-1: T_{detect,NR_Intra_CCA}, $T_{measure,NR_Intra_CCA}$ and $T_{evaluate,NR_Intra_CCA}$

DRX cycle length [s]	Scaling Factor (N1)		T_{detect,NR_Intra_CCA} [s] (number of DRX cycles)	$T_{measure,NR_Intra_CCA}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Intra_CCA}$ [s] (number of DRX cycles)
	FR1	FR2-2 Note 5			
0.32	1	12	0.32xN1x(36+M_d)xM2 {(36+M_d)xN1xM2}	0.32xN1x(4+M_m)xM2 {(4+M_m)xN1 xM2	0.32xN1x(16+M_e) x M2 {(16+M_e)xN1xM2}
0.64		8	0.64xN1x(28+M_d) {(28+M_d)xN1 }	0.64xN1x(2+M_m) {(2+M_m)xN1 }	0.64xN1x(8+M_e) {(8+M_e)xN1 }
1.28		6	1.28xN1x(25+M_d) {(25+M_d)xN1 }	1.28xN1x(1+M_m) {(1+M_m)xN1 }	1.28xN1x(5+M_e) {(5+M_e)xN1 }
2.56		5	2.56xN1x(23+M_d) {(23+M_d)xN1 }	2.56xN1x(1+M_m) {(1+M_m)xN1 }	2.56xN1x(3+M_e) {(3+M_e)xN1 }

Note 1: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1.

Note 2: Md, Mm, Me are the number of groups of consecutive N1 DRX cycles each group with at least one SMTC occasion not available during the T_{detect,NR_Intra_CCA}, $T_{measure,NR_Intra_CCA}$ and $T_{evaluate,NR_Intra_CCA}$, and $M_m \leq M_{m,max}$, $M_d \leq M_{d,max}$ and $M_e \leq M_{e,max}$

Note 3: $M_{m,max}$ = 16 for DRX cycle length = 0.32s; $M_{m,max}$ = 8 for DRX cycle length = 0.64s; $M_{m,max}$ = 4 for DRX cycle length = 1.28s; $M_{m,max}$ = 4 for DRX cycle length = 2.56s.

Note 4: $M_{d,max} = 4*M_{m,max}$, $M_{e,max} = 2*M_{m,max}$.

Note 5: Applies for UE supporting FR2-2 power class 2&3. For UE supporting FR2-2 power class 1, N1 = 12 for all DRX cycle length.

The UE shall restart the measurements upon exceeding $M_{m,max}$, $M_{d,max}$, or $M_{e,max}$.

4.2A.2.4 Measurements of inter-frequency NR cells when subject to CCA on the target cell

The UE shall be able to identify new inter-frequency cells and perform SS-RSRP or SS-RSRQ measurements of identified inter-frequency cells if carrier frequency information is provided by the serving cell, even if no explicit neighbour list with physical layer cell identities is provided.

When the inter-frequency measurement is performed on a neighbour cell in FR2-2 with shared spectrum channel access, UE shall determine the CCA mode of the neighbour cell according to *channelAccessMode2-r17*of the cell configured in *SIB4*. If *channelAccessMode2-r17* of the cell is enabled, UE shall assume that CCA applies to the cell and perform measurement accordingly, and the requirements in clause 4.2A.2.4 shall apply; otherwise, UE shall assume that CCA does not apply to the cell and perform measurement accordingly, and requirements in 4.2.2.4 shall apply.

If Srxlev > $S_{nonIntraSearchP}$ and Squal > $S_{nonIntraSearchQ}$ then the UE shall search for inter-frequency layers of higher priority at least every $T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in clause 4.2A.2.7.

If Srxlev ≤ $S_{nonIntraSearchP}$ or Squal ≤ $S_{nonIntraSearchQ}$ then the UE shall search for and measure inter-frequency layers of higher, equal or lower priority in preparation for possible reselection. In this scenario, the minimum rate at which the UE is required to search for and measure higher priority layers shall be the same as that defined below in this clause.

The UE shall be able to evaluate whether a newly detectable inter-frequency cell meets the reselection criteria defined in TS38.304 within $K_{carrier} * T_{detect,NR_Inter} + K_{carrier_CCA} * T_{detect,NR_Inter_CCA}$ if at least carrier frequency information is provided for inter-frequency neighbour cells by the serving cells when $T_{reselection} = 0$ provided that the reselection criteria is met by a margin of at least 5 dB in FR1 or [6.5]dB in FR2-2 for reselections based on ranking or 6dB in FR1 or [7.5]dB in FR2-2 for SS-RSRP reselections based on absolute priorities or 4dB in FR1 and [4]dB in FR2-2 for SS-RSRQ reselections based on absolute priorities. The parameter $K_{carrier}$ is the number of NR inter-frequency carriers on licensed band and $K_{carrier_CCA}$ is the number of NR inter-frequency carriers on unlicensed band indicated by the serving cell. An inter-frequency cell is considered to be detectable according to the conditions defined in Annex B. 2. 9 for a corresponding Band.

When higher priority cells are found by the higher priority search, they shall be measured at least every $T_{measure,NR_Inter_CCA}$. If after detecting a cell in a higher priority search, it is determined that reselection has not occurred then the UE is not required to continuously measure the detected cell to evaluate the ongoing possibility of reselection. However, the minimum measurement filtering requirements specified later in this clause shall still be met by the UE before it makes any determination that it may stop measuring the cell. If the UE detects on a NR carrier a cell whose physical identity is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform measurements on that cell.

The UE shall measure SS-RSRP or SS-RSRQ at least every $K_{carrier} * T_{measure,NR_Inter} + K_{carrier_CCA} * T_{measure,NR_Inter_CCA}$ for identified lower or equal priority inter-frequency cells. If the UE detects on a NR carrier a cell whose physical identity is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform measurements on that cell.

For a cell that is already identified, after 2 unsuccessful measurement attempts due to exceeding the maximum number of SMTC occasions not available at the UE, the UE shall detect cells on any of the configured serving- and/or non-serving carriers.

The UE shall filter SS-RSRP or SS-RSRQ measurements of each measured higher, lower and equal priority inter-frequency cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least $T_{measure,NR_Inter_CCA}/2$.

The UE shall not consider a NR neighbour cell in cell reselection, if it is indicated as not allowed in the measurement control system information of the serving cell.

For an inter-frequency cell that has been already detected, but that has not been reselected to, the filtering shall be such that the UE shall be capable of evaluating that the inter-frequency cell has met reselection criterion defined TS 38.304 within $K_{carrier} * T_{evaluate,NR_Inter} + K_{carrier_CCA} * T_{evaluate,NR_Inter_CCA}$ when $T_{reselection} = 0$ as specified in table 4.2A.2.4-1 provided that the reselection criteria is met by

- the condition when performing equal priority reselection and

  when *rangeToBestCell* is not configured:

- the cell is at least 5dB better ranked in FR1 or [6.5]dB better ranked in FR2-2 or.

when *rangeToBestCell* is configured:

- the cell has the highest number of beams above the threshold *absThreshSS-BlocksConsolidation* among all detected cells whose cell-ranking criterion R value [1] is within *rangeToBestCell* of the cell-ranking criterion R value of the highest ranked cell.
  - if there are multiple such cells, the cell has the highest rank among them
- the cell is at least 5dB better ranked in FR1 or [6.5]dB better ranked in FR2-2 if the current serving cell is among them. or

- 6dB in FR1 or [7.5]dB in FR2-2 for SS-RSRP reselections based on absolute priorities or
- 4dB in FR1 or [4]dB in FR2-2 for SS-RSRQ reselections based on absolute priorities.

When evaluating cells for reselection, the SSB side conditions apply to both serving and inter-frequency cells.

If $T_{reselection}$ timer has a non zero value and the inter-frequency cell is satisfied with the reselection criteria, the UE shall evaluate this inter-frequency cell for the $T_{reselection}$ time. If this cell remains satisfied with the reselection criteria within this duration, then the UE shall reselect that cell.

The UE is not expected to meet the measurement requirements for an inter-frequency carrier under DRX cycle=320 ms defined in Table 4.2A.2.4-1 under the following conditions:

- $T_{SMTC_intra} = T_{SMTC_inter} = 160$ ms; where T_{SMTC_intra} and T_{SMTC_inter} are periodicities of the SMTC occasions configured for the intra-frequency carrier and the inter-frequency carrier respectively, and
- SMTC occasions configured for the inter-frequency carrier occur up to 1 ms before the start or up to 1 ms after the end of the SMTC occasions configured for the intra-frequency carrier, and
- SMTC occasions configured for the intra-frequency carrier and for the inter-frequency carrier occur up to 1 ms before the start or up to 1 ms after the end of the paging occasion [1].

Table 4.2A.2.4-1: T_{detect,NR_Inter_CCA}, $T_{measure,NR_Inter_CCA}$ and $T_{evaluate,NR_Inter_CCA}$

DRX cycle length [s]	Scaling Factor (N1)		T_{detect,NR_Inter_CCA} [s] (number of DRX cycles)	$T_{measure,NR_Inter_CCA}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Inter_CCA}$ [s] (number of DRX cycles)
	FR1	FR2-2[Note 5]			
0.32	1	12	0.32xN1x(36+M_d)xM2 {(36+M_d)xN1xM2}	0.32xN1x(4+M_m) xM2 {(4+M_m)xN1xM2}	0.32xN1x(16+M_e) x M2 {(16+M_e)xN1 xM2}
0.64		8	0.64xN1x(28+M_d) {(28+M_d)xN1 }	0.64xN1x(2+M_m) {(2+M_m)xN1 }	0.64xN1x(8+M_e) {(8+M_e)xN1 }
1.28		6	1.28xN1x(25+M_d) {(25+M_d)xN1 }	1.28xN1x(1+M_m) {(1+M_m)xN1 }	1.28xN1x(5+M_e) {(5+M_e)xN1}
2.56		5	2.56xN1x(23+M_d) {(23+M_d)xN1 }	2.56xN1x(1+M_m) {(1+M_m)xN1 }	2.56xN1x(3+M_e) {(3+M_e)xN1}

Note 1: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1.
Note 2: Md, Mm, Me are the number of groups of consecutive N1 DRX cycles each group with at least one SMTC occasion not available at the UE during T_{detect,NR_Inter_CCA}, $T_{measure,NR_Inter_CCA}$ and $T_{evaluate,NR_Inter_CCA}$, and $M_m \le M_{m,max}$, $M_d \le M_{d,max}$ and $M_e \le M_{e,max}$
Note 3: $M_{m,max}$ = 16 for DRX cycle length = 0.32s;
$M_{m,max}$ = 8 for DRX cycle length = 0.64s;
$M_{m,max}$ = 4 for DRX cycle length = 1.28s;
$M_{m,max}$ = 4 for DRX cycle length = 2.56s
Note 4: $M_{d,max} = 4*M_{m,max}$, $M_{e,max} = 2*M_{m,max}$.
Note 5: Applies for UE supporting FR2-2 power class 2&3. For UE supporting FR2-2 power class 1, N1 = 12 for all DRX cycle length.

The UE shall restart the measurements upon exceeding Mm,max, Md.max, or Me,max.

4.2A.2.5 Measurements of inter-RAT E-UTRAN cells when subject to CCA on the serving cell

The requirements in clause 4.2.2.5 shall apply.

4.2A.2.6 Maximum interruption in paging reception when subject to CCA on the target cell

UE shall perform the cell re-selection with minimum interruption in monitoring downlink channels for paging reception.

At intra-frequency and inter-frequency cell re-selection, the UE shall monitor the downlink of serving cell for paging reception until the UE is capable to start monitoring downlink channels of the target intra-frequency and inter-frequency cell for paging reception. The interruption time shall not exceed $T_{SI,CCA} + 2*T_{target_cell_SMTC_period}$.

At inter-RAT cell re-selection, the UE shall monitor the downlink of serving cell for paging reception until the UE is capable to start monitoring downlink channels for paging reception of the target inter-RAT cell. For NR to E-UTRAN cell re-selection the interruption time shall not exceed $T_{SI\text{-}EUTRA}$ + 55 ms.

T_{SI_CCA} is the time required for receiving all the relevant system information data according to the reception procedure and the RRC procedure delay of system information blocks defined in TS 38.331 [2] for an NR cell.

$T_{SI\text{-}EUTRA}$ is the time required for receiving all the relevant system information data according to the reception procedure and the RRC procedure delay of system information blocks defined in TS 36.331 [16] for an E-UTRAN cell.

These requirements assume sufficient radio conditions, so that decoding of system information can be made without errors and does not take into account cell re-selection failure.

4.2A.2.7 General requirements

The requirements in clause 4.2.2.7 shall apply.

4.2B Cell Re-selection for RedCap

4.2B.1 Introduction

The terms SSB and SMTC in this clause apply to CD-SSB only if not specified otherwise.

The 1 Rx RedCap UE for performing the cell reselection procedure [1] applies:

- *Qrxlevmin* as the signaled value of *Qrxlevmin* [2] -1 dB.
- *Qqualmin* as the signaled value of *Qqualmin* [2] -1 dB.

4.2B.2 Requirements

4.2B.2.1 UE measurement capability for RedCap

4.2B.2.1.1 UE measurement capability for 1 Rx RedCap

For idle mode cell re-selection purposes, and for UE supporting *IdleInactiveMeasurements-r16* or *idleInactiveEUTRA-MeasReport-r16*, the UE shall be capable of monitoring at least:

- Intra-frequency carrier, and
- Depending on UE capability, 6 NR inter-frequency carriers, and
- Depending on UE capability, 6 FDD E-UTRA inter-RAT carriers, and
- Depending on UE capability, 6 TDD E-UTRA inter-RAT carriers.

In addition to the requirements defined above, a UE supporting E-UTRA measurements in RRC_IDLE state shall be capable of monitoring a total of at least 11 carrier frequency layers, which includes serving layer, comprising of any above defined combination of E-UTRA FDD, E-UTRA TDD and NR layers.

4.2B.2.1.2 UE measurement capability for 2 Rx RedCap

The capability defined in section 4.2.2.1 apply for this section.

4.2B.2.2 Measurement and evaluation of serving cell for RedCap UE

The UE shall measure the SS-RSRP and SS-RSRQ level of the serving cell and evaluate the cell selection criterion S defined in TS 38.304 [1] for the serving cell at least once every M1*N1 DRX cycle; where:

- M1=2 if SMTC periodicity (T_{SMTC}) > 20 ms and DRX cycle ≤ 0.64 second,
- otherwise M1=1.

The UE shall filter the SS-RSRP and SS-RSRQ measurements of the serving cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by, at least DRX cycle/2.

If the UE is not configured with eDRX_IDLE cycle and the UE has evaluated according to Table 4.2B.2.2-1 for both 1Rx RedCap and 2Rx RedCap in N_{serv_RedCap} consecutive DRX cycles that the serving cell does not fulfil the cell selection criterion S, the UE shall initiate the measurements of all neighbour cells indicated by the serving cell, regardless of the measurement rules currently limiting UE measurement activities. . In this case the UE shall not relax measurements on any of the neighbour cells even if UE has fulfilled the criteria for meeting the relaxed measurement requirements defined clauses 4.2B.2.9.3, 4.2B.2.9.5, 4.2B.2.9.6, 4.2B.2.9.7, 4.2B.2.10.3, 4.2B.2.10.5, 4.2B.2.10.6, 4.2B.2.10.7, 4.2B.2.11.3, 4.2B.2.11.5, 4.2B.2.11.6, and 4.2B.2.11.7.

If the UE is configured with eDRX_IDLE cycle and has evaluated according N_{serv_RedCap} consecutive DRX cycles within a single PTW that the serving cell does not fulfil the cell selection criterion S, the UE shall initiate the measurements of all neighbour cells indicated by the serving cell, regardless of the measurement rules currently limiting UE measurement activities. In this case the UE shall not relax measurements on any of the neighbour cells even if UE has fulfilled the criteria for meeting the relaxed measurement requirements defined clauses 4.2B.2.9.3, 4.2B.2.9.5, 4.2B.2.9.6, 4.2B.2.9.7, 4.2B.2.10.3, 4.2B.2.10.5, 4.2B.2.10.6, 4.2B.2.10.7, 4.2B.2.11.3, 4.2B.2.11.5, 4.2B.2.11.6, and 4.2B.2.11.7.

For the UE configured with eDRX_IDLE cycle, N_{serv_RedCap} is specified in Table 4.2B.2.2-2 for 1 Rx RedCap and 2 Rx RedCap in FR1 and in Table 4.2B.2.2-3 for FR2 for 2 Rx RedCap.

If the UE in RRC_IDLE has not found any new suitable cell based on searches and measurements using the intra-frequency, inter-frequency and inter-RAT information indicated in the system information during the time T, the UE shall initiate cell selection procedures for the selected PLMN as defined in TS 38.304 [1], where

- T= 10 s if the UE is not configured with eDRX_IDLE cycle, or
- T= MAX (10 s, one eDRX_IDLE cycle) if the UE is configured with eDRX_IDLE cycle in FR1, or
- T= MAX (10 s, N1* eDRX_IDLE cycle) if the UE is configured with eDRX_IDLE cycle less than 20.48s in FR2,
- Otherwise, T= MAX (10 s, one eDRX_IDLE cycle) if the UE is configured with eDRX_IDLE cycle no less than 20.48 s in FR2

Table 4.2B.2.2-1: N_{serv_RedCap}

DRX cycle length [s]	Scaling Factor (N1)		N_{serv_RedCap} [number of DRX cycles]
	FR1	FR2[Note1]	
0.32	1	8	M1*N1*4
0.64		5	M1*N1*4
1.28		4	N1*2
2.56		3	N1*2

Note 1: Applies for RedCap UE of all FR2 power class.

Table 4.2B.2.2-2: N_{serv_RedCap} for UE configured with eDRX_IDLE cycle (Frequency range FR1)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	Scaling Factor (N1)	N_{serv_RedCap} [number of DRX or eDRX cycles Note 3]
2.56	N/A	N/A	1	N1*2
5.12	N/A	N/A		N1*2
10.24	N/A	N/A		N1*2
20.48 ≤ eDRX_IDLE cycle length ≤10485.76	0.32	≥[1.28] (1)		N1*M1*2
	0.64	≥ 1.28 (1) (M1=1) or ≥ 2.56 (2) (M1=2)		N1*M1*2
	1.28	≥2.56 (2)		N1*2
	2.56	≥5.12 (4)		N1*2
NOTE 1: The number of DRX cycles in this table is given for the DRX cycles within PTWs. NOTE 2: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [34]. NOTE 3: Number of eDRX cycles when eDRX_IDLE cycle length equals 2.56s, 5.12s and 10.24s. Otherwise, number of DRX cycles. NOTE 4: The lower bound of PTW length is derived based on $\left\lceil \frac{Nserv_RedCap * DRX_cycle}{1.28} \right\rceil * 1.28.$				

Table 4.2B.2.2-3: N_{serv_RedCap} for UE configured with eDRX_IDLE cycle (Frequency range FR2)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	Scaling Factor (N1) Note1	N_{serv_RedCap} [number of DRX or eDRX cycles Note 4]
2.56	N/A	N/A	3	N1*2
5.12	N/A	N/A	3	N1*2
10.24	N/A	N/A	3	N1*2
20.48 ≤ eDRX_IDLE cycle length ≤10485.76	0.32	≥5.12 (4)	8	N1*2
	0.64	≥6.4 (5)	5	N1*2
	1.28	≥10.24 (8)	4	N1*2
	2.56	≥15.36 (12)	3	N1*2
NOTE 1: Applies for RedCap UE of all FR2 power class. NOTE 2: The number of DRX cycles in this table is given for the DRX cycles within PTWs. NOTE 3: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [34]. NOTE 4: Number of eDRX cycles when eDRX_IDLE cycle length equals 2.56s, 5.12s and 10.24s. Otherwise, number of DRX cycles. NOTE 5: The lower bound of PTW length is derived based on $\left\lceil \frac{Nserv_RedCap * DRX_cycle}{1.28} \right\rceil * 1.28.$ NOTE 6: When eDRX=20.48s and DRX=0.32s, UE is allowed to perform cell evaluation within PTW in every 2 eDRX cycles.				

For any requirement in this section, when the UE transitions between any two states when being configured with eDRX_IDLE, being configured with eDRX_IDLE cycle, changing eDRX_IDLE cycle length, or changing PTW configuration, the UE shall meet the transition requirement, which is the less stringent requirement of the two requirements corresponding to the first state and the second state, during the transition time interval which is the time corresponding to the transition requirement. After the transition time interval, the UE shall meet the requirement corresponding to the second state.

4.2B.2.3 Measurements of intra-frequency NR cells for RedCap UE

The UE shall be able to identify new intra-frequency cells and perform SS-RSRP and SS-RSRQ measurements of the identified intra-frequency cells without an explicit intra-frequency neighbour list containing physical layer cell identities.

The UE shall be able to evaluate whether a newly detectable intra-frequency cell meets the reselection criteria defined in TS 38.304 [1] within $T_{detect,NR_Intra_RedCap}$ when that Treselection= 0 . An intra frequency cell is considered to be detectable according to the conditions defined in Annex B.1.4 for a corresponding Band.

The UE shall measure SS-RSRP and SS-RSRQ at least every $T_{measure,NR_Intra_RedCap}$ for intra-frequency cells that are identified and measured according to the measurement rules.

The UE shall filter SS-RSRP and SS-RSRQ measurements of each measured intra-frequency cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least $T_{measure,NR_Intra_RedCap}/2$.

The UE shall not consider a NR neighbour cell in cell reselection, if it is indicated as not allowed in the measurement control system information of the serving cell.

For an intra-frequency cell that has been already detected, but that has not been reselected to, the filtering shall be such that the UE shall be capable of evaluating that the intra-frequency cell has met reselection criterion defined in TS 38.304 [1] within $T_{evaluate,NR_Intra_RedCap}$ when $T_{reselection} = 0$ provided that:

when *rangeToBestCell* is not configured:

- the cell is at least 3dB better ranked in FR1 or 4.5dB better ranked in FR2 for 2 Rx RedCap.
- the cell is at least 4dB better ranked in FR1 for 1 Rx RedCap.

when *rangeToBestCell* is configured:

- the cell has the highest number of beams above the threshold *absThreshSS-BlocksConsolidation* among all detected cells whose cell-ranking criterion R value in TS 38.304 [1] is within *rangeToBestCell* of the cell-ranking criterion R value of the highest ranked cell.
    - if there are multiple such cells, the cell has the highest rank among them.
        - the cell is at least 3dB better ranked in FR1 or 4.5dB better ranked in FR2 if the current serving cell is among them for 2 Rx RedCap.
        - the cell is at least 4dB better ranked in FR1 if the current serving cell is among them for 1 Rx RedCap.

The 1 Rx RedCap UE applies *absThreshSS-BlocksConsolidation* as the signaled value of *absThreshSS-BlocksConsolidation* [2] + 1 dB.

When evaluating cells for reselection, the SSB side conditions apply to both serving and non-serving intra-frequency cells.

If $T_{reselection}$ timer has a non-zero value and the intra-frequency cell is satisfied with the reselection criteria which are defined in TS 38.304 [1], the UE shall evaluate this intra-frequency cell for the $T_{reselection}$ time. If this cell remains satisfied with the reselection criteria within this duration, then the UE shall reselect that cell.

For both 1Rx RedCap and 2Rx RedCap not configured with eDRX_IDLE cycle, $T_{detect,NR_Intra_RedCap}$, $T_{measure,NR_Intra_RedCap}$ and $T_{evaluate,NR_Intra_RedCap}$ are specified in Table 4.2B.2.3-1

For 1 Rx RedCap and 2 Rx RedCap configured with eDRX_IDLE cycle, $T_{detect,NR_Intra_RedCap}$, $T_{measure,NR_Intra_RedCap}$ and $T_{evaluate,NR_Intra_RedCap}$ are specified in Table 4.2B.2.3-2 and Table 4.2B.2.3-3 for FR1 and FR2 respectively, where the requirements apply provided that the serving cell is configured with eDRX_IDLE and is the same in all PTWs during any of $T_{detect,NR_Intra_RedCap}$, $T_{measure,NR_Intra_RedCap}$ and $T_{evaluate,NR_Intra_RedCap}$ when multiple PTWs are used.

Table 4.2B.2.3-1: $T_{detect,NR_Intra_RedCap}$, $T_{measure,NR_Intra_RedCap}$ and $T_{evaluate,NR_Intra_RedCap}$

DRX cycle length [s]	Scaling Factor (N1)		$T_{detect,NR_Intra_RedCap}$ [s] (number of DRX cycles)	$T_{measure,NR_Intra_RedCap}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Intra_RedCap}$ [s] (number of DRX cycles)
	FR1	FR2[Note1]			
0.32	1	8	11.52 x N1 x M2 (36 x N1 x M2)	1.28 x N1 x M2 (4 x N1 x M2)	5.12 x N1 x M2 (16 x N1 x M2)
0.64		5	17.92 x N1 (28 x N1)	1.28 x N1 (2 x N1)	5.12 x N1 (8 x N1)
1.28		4	32 x N1 (25 x N1)	1.28 x N1 (1 x N1)	6.4 x N1 (5 x N1)
2.56		3	58.88 x N1 (23 x N1)	2.56 x N1 (1 x N1)	7.68 x N1 (3 x N1)

Note 1: Applies for RedCap UE of all FR2 power class.
Note 2: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1. If different SMTC periodicities are configured for different cells, the SMTC periodicity in this note is the one used by the cell being identified. During PSS/SSS detection, the periodicity of the SMTC configured for the intra-frequency carrier is assumed, and if the actual SSB transmission periodicity is greater than the SMTC configured for the intra-frequency carrier, longer $T_{detect, NR_intra_RedCap}$ is expected.

Table 4.2B.2.3-2: $T_{detect,NR_Intra_RedCap}$, $T_{measure,NR_Intra_RedCap}$ and $T_{evaluate,NR_Intra_RedCap}$ for UE configured with eDRX_IDLE cycle (Frequency range FR1)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	$T_{detect,NR_Intra_RedCap}$ [s] (number of DRX cycles or eDRX cycles [Note 3])	$T_{measure,NR_Intra_RedCap}$ [s] (number of DRX cycles or eDRX cycles [Note 3])	$T_{evaluate,NR_Intra_RedCap}$ [s] (number of DRX cycles or eDRX cycles [Note 3])
2.56	-	-	58.88 (23)	2.56 (1)	7.68 (3)
5.12	-	-	117.76 (23)	5.12 (1)	10.24 (2)
10.24	-	-	235.52 (23)	10.24 (1)	20.48 (2)
20.48 ≤ eDRX_IDLE cycle length ≤10485.76	0.32	≥[1.28] ([1])	$eDRX_cycle_length \times \left\lceil \frac{23}{PTW/DRX_cycle_length} \right\rceil$ (23)	0.32 x M2 (1 x M2)	0.64 x M2 (2 x M2)
	0.64	≥[1.28] ([1])		0.64 (1)	1.28 (2)
	1.28	≥[2.56] ([2])		1.28 (1)	2.56 (2)
	2.56	≥[5.12] ([4])		2.56 (1)	5.12 (2)

Note 1: The number of DRX cycles in this table is given for the DRX cycles within PTWs.
Note 2: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [34].
Note 3: Number of eDRX cycles when eDRX_IDLE cycle length equals 2.56s, 5.12s and 10.24s. Otherwise, number of DRX cycles.
Note 4: The lower bound of PTW length is derived based on $\left\lceil \frac{Tevaluate,NR_Intra_RedCap * DRX_cycle}{1.28} \right\rceil * 1.28$.
Note 5: M2 = 2 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1.

Table 4.2B.2.3-3: $T_{detect,NR_Intra_RedCap}$, $T_{measure,NR_Intra_RedCap}$ and $T_{evaluate,NR_Intra_RedCap}$ for UE configured with eDRX_IDLE cycle (Frequency range FR2)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	Scaling Factor (N1) Note1	$T_{detect,NR_Intra_RedCap}$ [s] (number of DRX cycles or eDRX cycles Note 4)	$T_{measure,NR_Intra_RedCap}$ [s] (number of DRX cycles or eDRX cycles Note 4)	$T_{evaluate,NR_Intra_RedCap}$ [s] (number of DRX cycles or eDRX cycles Note 4)
2.56	-	-	3	58.88 x N1 (23 x N1)	2.56 x N1 (1 x N1)	7.68 x N1 (3 x N1)
5.12	-	-	3	117.76 x N1 (23 x N1)	5.12 x N1 (1 x N1)	10.24 x N1 (2 x N1)
10.24	-	-	3	235.52 x N1 (23 x N1)	10.24 x N1 (1 x N1)	20.48 x N1 (2 x N1)
20.48 ≤ eDRX_IDLE cycle length ≤10485.76	0.32	≥5.12 (4)	8	$eDRX_cycle_length \times \left\lceil \frac{23 \times N1}{PTW/DRX_cycle_length} \right\rceil$ (23 x N1)	0.32 x N1 (1 x N1)	0.64 x N1 (2 x N1)
	0.64	≥6.4 (5)	5		0.64 x N1 (1 x N1)	1.28 x N1 (2 x N1)
	1.28	≥10.24 (8)	4		1.28 x N1 (1 x N1)	2.56 x N1 (2 x N1)
	2.56	≥15.36 (12)	3		2.56 x N1 (1 x N1)	5.12 x N1 (2 x N1)

NOTE 1: Applies for RedCap UE of all power class.
NOTE 2: The number of DRX cycles in this table is given for the DRX cycles within PTWs.
NOTE 3: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [34].
NOTE 4: Number of eDRX cycles when eDRX_IDLE cycle length equals 2.56s, 5.12s and 10.24s. Otherwise, number of DRX cycles.
NOTE 5: The lower bound of PTW length is derived based on $\left\lceil \frac{Tevaluate,NR_Intra_RedCap * DRX_cycle}{1.28} \right\rceil * 1.28$.
NOTE 6: When eDRX=20.48s and DRX=0.32s, UE is allowed to perform cell evaluation within PTW in every 2 eDRX cycles.

For any requirement in this section, when the UE transitions between any two states when being configured with eDRX_IDLE, being configured with eDRX_IDLE cycle, changing eDRX_IDLE cycle length, or changing PTW configuration, the UE shall meet the transition requirement, which is the less stringent requirement of the two requirements corresponding to the first state and the second state, during the transition time interval which is the time corresponding to the transition requirement. After the transition time interval, the UE shall meet the requirement corresponding to the second state.

4.2B.2.4 Measurements of inter-frequency NR cells for RedCap UE

The UE shall be able to identify new inter-frequency cells and perform SS-RSRP or SS-RSRQ measurements of identified inter-frequency cells if carrier frequency information is provided by the serving cell, even if no explicit neighbour list with physical layer cell identities is provided.

If Srxlev > $S_{nonIntraSearchP}$ and Squal > $S_{nonIntraSearchQ}$ then the UE shall search for inter-frequency layers of higher priority at least every $T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in clause 4.2.2.7.

If Srxlev ≤ $S_{nonIntraSearchP}$ or Squal ≤ $S_{nonIntraSearchQ}$ then the UE shall search for and measure inter-frequency layers of higher, equal or lower priority in preparation for possible reselection. In this scenario, the minimum rate at which the UE is required to search for and measure higher priority layers shall be the same as that defined below in this clause.

The UE shall be able to evaluate whether a newly detectable inter-frequency cell meets the reselection criteria defined in TS 38.304 [1] within $K_{carrier_RedCap} * T_{detect,NR_Inter_RedCap}$ if at least carrier frequency information is provided for inter-frequency neighbour cells by the serving cells when $T_{reselection} = 0$ provided that the reselection criteria is met

For 2 Rx RedCap by a margin of at least

5 dB in FR1 or 6.5 dB in FR2 for reselections based on ranking or

6 dB in FR1 or 7.5 dB in FR2 for SS-RSRP reselections based on absolute priorities or

4 dB in FR1 and 4 dB in FR2 for SS-RSRQ reselections based on absolute priorities

For 1 Rx RedCap by a margin of at least

6 dB in FR1 for reselections based on ranking or

7 dB in FR1 for SS-RSRP reselections based on absolute priorities or

5 dB in FR1 for SS-RSRQ reselections based on absolute priorities.

The parameter $K_{carrier_RedCap}$ is the number of NR inter-frequency carriers indicated by the serving cell. An inter-frequency cell is considered to be detectable according to the conditions defined in Annex B.1.5 for a corresponding Band. When higher priority cells are found by the higher priority search, they shall be measured at least every $T_{measure,NR_Inter_RedCap}$. If, after detecting a cell in a higher priority search, it is determined that reselection has not occurred then the UE is not required to continuously measure the detected cell to evaluate the ongoing possibility of reselection. However, the minimum measurement filtering requirements specified later in this clause shall still be met by the UE before it makes any determination that it may stop measuring the cell. If the UE detects on a NR carrier a cell whose physical identity is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform measurements on that cell.

The UE shall measure SS-RSRP or SS-RSRQ at least every $K_{carrier_RedCap} * T_{measure,NR_Inter_RedCap}$ for identified lower or equal priority inter-frequency cells. If the UE detects on a NR carrier a cell whose physical identity is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform measurements on that cell.

The UE shall filter SS-RSRP or SS-RSRQ measurements of each measured higher, lower and equal priority inter-frequency cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least $T_{measure,NR_Inter}/2$.

The UE shall not consider a NR neighbour cell in cell reselection, if it is indicated as not allowed in the measurement control system information of the serving cell.

For an inter-frequency cell that has been already detected, but that has not been reselected to, the filtering shall be such that the UE shall be capable of evaluating that the inter-frequency cell has met reselection criterion defined TS 38.304 [1] within $K_{carrier} * T_{evaluate,NR_Inter_RedCap}$ when $T_{reselection} = 0$ provided that the reselection criteria is met by

- the condition when performing equal priority reselection and
  - when *rangeToBestCell* is not configured:
    - the cell is at least 5dB better ranked in FR1 or 6.5dB better ranked in FR2 for 2 Rx RedCap.
    - the cell is at least [6dB] better ranked in FR1 for 1 Rx RedCap.
  - when *rangeToBestCell* is configured:
    - the cell has the highest number of beams above the threshold *absThreshSS-BlocksConsolidation* among all detected cells whose cell-ranking criterion R value defined in TS38.304 [1] is within *rangeToBestCell* of the cell-ranking criterion R value of the highest ranked cell.
      - if there are multiple such cells, the cell has the highest rank among them
      - the cell is at least 5dB better ranked in FR1 or 6.5dB better ranked in FR2 if the current serving cell is among them, or 6dB in FR1 or 7.5dB in FR2 for SS-RSRP reselections based on absolute priorities for 2 Rx RedCap or 4dB in FR1 or 4dB in FR2 for SS-RSRQ reselections based on absolute priorities for 2 Rx RedCap.
      - the cell is at least [6dB] better ranked in FR1 if the current serving cell is among them, or [7dB] in FR1 for SS-RSRP reselections based on absolute priorities or [5dB] in FR1 for SS-RSRQ reselections based on absolute priorities for 1 Rx RedCap.

The 1 Rx RedCap UE applies *absThreshSS-BlocksConsolidation* as the signaled value of *absThreshSS-BlocksConsolidation* [2] + 1 dB.

When evaluating cells for reselection, the SSB side conditions apply to both serving and inter-frequency cells.

If $T_{reselection}$ timer has a non-zero value and the inter-frequency cell is satisfied with the reselection criteria, the UE shall evaluate this inter-frequency cell for the $T_{reselection}$ time. If this cell remains satisfied with the reselection criteria within this duration, then the UE shall reselect that cell.

The UE is not expected to meet the measurement requirements for an inter-frequency carrier under DRX cycle=320 ms defined in Table 4.2B.2.4-1 for both 1Rx RedCap and 2Rx RedCap under the following conditions:

- $T_{SMTC_intra} = T_{SMTC_inter} = 160$ ms; where T_{SMTC_intra} and T_{SMTC_inter} are periodicities of the SMTC occasions configured for the intra-frequency carrier and the inter-frequency carrier respectively, and
- SMTC occasions configured for the inter-frequency carrier occur up to 1 ms before the start or up to 1 ms after the end of the SMTC occasions configured for the intra-frequency carrier, and
- SMTC occasions configured for the intra-frequency carrier and for the inter-frequency carrier occur up to 1 ms before the start or up to 1 ms after the end of the paging occasion defined in TS38.304 [1].

For 1 Rx RedCap and 2 Rx RedCap not configured with eDRX_IDLE cycle, $T_{detect,NR_Inter_RedCap}$, $T_{measure,NR_Inter_RedCap}$ and $T_{evaluate,NR_Inter_RedCap}$ are specified in Table 4.2B.2.4.1-1.

For 1 Rx RedCap and 2 Rx RedCap configured with eDRX_IDLE cycle, $T_{detect,NR_Inter_RedCap}$, $T_{measure,NR_Inter_RedCap}$ and $T_{evaluate,NR_Inter_RedCap}$ are specified in Table 4.2B.2.4-2 and Table 4.2B.2.4-3 for FR1 and FR2 respectively. The requirements apply provided that the serving cell is configured with eDRX_IDLE and is the same in all PTWs during any of $T_{detect,NR_Inter_RedCap}$, $T_{measure,NR_Inter_RedCap}$ and $T_{evaluate,NR_Inter_RedCap}$ when multiple PTWs are used.

Table 4.2B.2.4-1: $T_{detect,NR_Inter_RedCap}$, $T_{measure,NR_Inter_RedCap}$ and $T_{evaluate,NR_Inter_RedCap}$

DRX cycle length [s]	Scaling Factor (N1)		$T_{detect,NR_Inter_RedCap}$ [s] (number of DRX cycles)	$T_{measure,NR_Inter_RedCap}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Inter_RedCap}$ [s] (number of DRX cycles)
	FR1	FR2[Note1]			
0.32	1	8	11.52 x N1 x 1.5 (36 x N1 x 1.5)	1.28 x N1 x 1.5 (4 x N1 x 1.5)	5.12 x N1 x 1.5 (16 x N1 x 1.5)
0.64		5	17.92x N1 (28 x N1)	1.28 x N1 (2 x N1)	5.12 x N1 (8 x N1)
1.28		4	32 x N1 (25 x N1)	1.28 x N1 (1 x N1)	6.4 x N1 (5 x N1)
2.56		3	58.88 x N1 (23 x N1)	2.56 x N1 (1 x N1)	7.68 x N1 (3 x N1)
Note 1: Applies for RedCap UE of all FR2 power class.					

Table 4.2B.2.4-2: $T_{detect,NR_Inter_RedCap}$, $T_{measure,NR_Inter_RedCap}$ and $T_{evaluate,NR_Inter_RedCap}$ for UE configured with eDRX_IDLE cycle (Frequency range FR1)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	$T_{detect,NR_Inter_RedCap}$ [s] (number of DRX cycles or eDRX cycles [Note 3])	$T_{measure,NR_Inter_RedCap}$ [s] (number of DRX cycles or eDRX cycles [Note 3])	$T_{evaluate,NR_Inter_RedCap}$ [s] (number of DRX cycles or eDRX cycles [Note 3])
2.56	-	-	58.88 (23)	2.56 (1)	7.68 (3)
5.12	-	-	117.76 (23)	5.12 (1)	10.24 (2)
10.24	-	-	235.52 (23)	10.24 (1)	20.48 (2)
20.48 ≤ eDRX_IDLE cycle length ≤10485.76	0.32	≥1.28 (1)	$eDRX_cycle_length \times \left\lceil \frac{23}{PTW/DRX_cycle_length} \right\rceil$ (23)	0.32 x 1.5 (1 x 1.5)	0.64 x 1.5 (2 x 1.5)
	0.64	≥1.28 (1)		0.64 (1)	1.28 (2)
	1.28	≥2.56 (2)		1.28 (1)	2.56 (2)

	2.56	≥5.12 (4)		2.56 (1)	5.12 (2)
NOTE 1: The number of DRX cycles in this table is given for the DRX cycles within PTWs. NOTE 2: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [34]. NOTE 3: Number of eDRX cycles when eDRX_IDLE cycle length equals 2.56s, 5.12s and 10.24s. Otherwise, number of DRX cycles. NOTE 4: The lower bound of PTW length is derived based on $\left\lceil \frac{T_{evaluate,NR_Inter_RedCap} * DRX_cycle}{1.28} \right\rceil * 1.28$.					

Table 4.2B.2.4-3: $T_{detect,NR_Inter_RedCap}$, $T_{measure,NR_Inter_RedCap}$ and $T_{evaluate,NR_Inter_RedCap}$ for UE configured with eDRX_IDLE cycle (Frequency range FR2)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	Scaling Factor (N1) Note1	$T_{detect,NR_Inter_RedCap}$ [s] (number of DRX cycles or eDRX cycles Note 3)	$T_{measure,NR_Inter_RedCap}$ [s] (number of DRX cycles or eDRX cycles Note 3)	$T_{evaluate,NR_Inter_RedCap}$ [s] (number of DRX cycles or eDRX cycles Note 3)
2.56	-	-	3	58.88 x N1 (23 x N1)	2.56 x N1 (1 x N1)	7.68 x N1 (3 x N1)
5.12	-	-	3	117.76 x N1 (23 x N1)	5.12 x N1 (1 x N1)	10.24 x N1 (2 x N1)
10.24	-	-	3	235.52 x N1 (23 x N1)	10.24 x N1 (1 x N1)	20.48 x N1 (2 x N1)
20.48 ≤ eDRX_IDLE cycle length ≤10485.76	0.32	≥5.12 (4)	8	$eDRX_cycle_length \times \left\lceil \frac{23 \times N1}{PTW/DRX_cycle_length} \right\rceil$ (23 x N1)	0.32 x N1 (1 x N1)	0.64 x N1 (2 x N1)
	0.64	≥6.4 (5)	5		0.64 x N1 (1 x N1)	1.28 x N1 (2 x N1)
	1.28	≥10.24 (8)	4		1.28 x N1 (1 x N1)	2.56 x N1 (2 x N1)
	2.56	≥15.36 (12)	3		2.56 x N1 (1 x N1)	5.12 x N1 (2 x N1)
NOTE 1: Applies for RedCap UE of all power class. NOTE 2: The number of DRX cycles in this table is given for the DRX cycles within PTWs. NOTE 3: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [34]. NOTE 4: Number of eDRX cycles when eDRX_IDLE cycle length equals 2.56s, 5.12s and 10.24s. Otherwise, number of DRX cycles. NOTE 5: The lower bound of PTW length is derived based on $\left\lceil \frac{T_{evaluate,NR_Inter_RedCap} * DRX_cycle}{1.28} \right\rceil * 1.28$. NOTE 6: When eDRX=20.48s and DRX=0.32s, UE is allowed to perform cell evaluation within PTW in every 2 eDRX cycles.						

For any requirement in this section, when the UE transitions between any two states when being configured with eDRX_IDLE, being configured with eDRX_IDLE cycle, changing eDRX_IDLE cycle length, or changing PTW configuration, the UE shall meet the transition requirement, which is the less stringent requirement of the two requirements corresponding to the first state and the second state, during the transition time interval which is the time corresponding to the transition requirement. After the transition time interval, the UE shall meet the requirement corresponding to the second state.

4.2B.2.5 Measurements of inter-RAT E-UTRAN cells for RedCap UE

If Srxlev > $S_{nonIntraSearchP}$ and Squal > $S_{nonIntraSearchQ}$ then the UE shall search for inter-RAT E-UTRAN layers of higher priority at least every $T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in clause 4.2B.2.7.

If Srxlev ≤ $S_{nonIntraSearchP}$ or Squal ≤ $S_{nonIntraSearchQ}$ then the UE shall search for and measure inter-RAT E-UTRAN layers of higher, lower priority in preparation for possible reselection. In this scenario, the minimum rate at which the UE is required to search for and measure higher priority inter-RAT E-UTRAN layers shall be the same as that defined below for lower priority RATs.

The requirements in this clause apply for inter-RAT E-UTRAN FDD measurements and E-UTRA TDD measurements. When the measurement rules indicate that inter-RAT E-UTRAN cells are to be measured, the UE shall measure RSRP

and RSRQ of detected E-UTRA cells in the neighbour frequency list at the minimum measurement rate specified in this clause.

The parameter $N_{EUTRA_carrier_RedCap}$ is the total number of configured E-UTRA carriers in the neighbour frequency list. The UE shall filter RSRP and RSRQ measurements of each measured E-UTRA cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least $T_{measure,EUTRAN_RedCap}/2$.

An inter-RAT E-UTRA cell is considered to be detectable provided the following conditions are fulfilled:

- the same conditions as for inter-frequency RSRP measurements specified in TS 36.133 [15, Annex B.x.y] are fulfilled for a corresponding Band, and

- the same conditions as for inter-frequency RSRQ measurements specified in TS 36.133 [15, Annex B.x.y] are fulfilled for a corresponding Band.

- SCH conditions specified in TS 36.133 [15, Annex B.1.2] are fulfilled for a corresponding Band

The UE shall be able to evaluate whether a newly detectable inter-RAT E-UTRAN cell meets the reselection criteria defined in TS38.304 [1] within $(N_{EUTRA_carrier_RedCap}) * T_{detect,EUTRAN_RedCap}$ when $Srxlev \leq S_{nonIntraSearchP}$ or $Squal \leq S_{nonIntraSearchQ}$ when $T_{reselection} = 0$ provided that the reselection criteria are met by a margin of at least 6dB for RSRP reselections based on absolute priorities or 4dB for RSRQ reselections based on absolute priorities for 2 Rx RedCap and at least [6dB] for RSRP reselections based on absolute priorities or [4dB] for RSRQ reselections based on absolute priorities for 1 Rx RedCap.

Cells which have been detected shall be measured at least every $(N_{EUTRA_carrier_RedCap}) * T_{measure,EUTRAN_RedCap}$ when $Srxlev \leq S_{nonIntraSearchP}$ or $Squal \leq S_{nonIntraSearchQ}$.

When higher priority cells are found by the higher priority search, they shall be measured at least every $T_{measure,EUTRAN_RedCap}$. If, after detecting a cell in a higher priority search, it is determined that reselection has not occurred then the UE is not required to continuously measure the detected cell to evaluate the ongoing possibility of reselection. However, the minimum measurement filtering requirements specified later in this clause shall still be met by the UE before it makes any determination that it may stop measuring the cell.

If the UE detects on an inter-RAT E-UTRAN carrier a cell whose physical identity is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform measurements on that cell.

The UE shall not consider an inter-RAT E-UTRA cell in cell reselection, if it is indicated as not allowed in the measurement control system information of the serving cell.

For a cell that has been already detected, but that has not been reselected to, the filtering shall be such that the UE shall be capable of evaluating that an already identified inter-RAT E-UTRA cell has met reselection criterion defined in TS 38.304 [1] within $(N_{EUTRA_carrier_RedCap}) * T_{evaluate,EUTRAN_RedCap}$ when $T_{reselection} = 0$ provided that the reselection criteria are met by a margin of at least 6dB for RSRP reselections based on absolute priorities or 4dB for RSRQ reselections based on absolute priorities for 2 Rx RedCap and at least 6dB for RSRP reselections based on absolute priorities or 4dB for RSRQ reselections based on absolute priorities for 1 Rx RedCap.

If $T_{reselection}$ timer has a non-zero value and the inter-RAT E-UTRA cell is satisfied with the reselection criteria which are defined in TS 38.304 [1], the UE shall evaluate this E-UTRA cell for the $T_{reselection}$ time. If this cell remains satisfied with the reselection criteria within this duration, then the UE shall reselect that cell.

For 1 Rx RedCap and 2 Rx RedCap not configured with eDRX_IDLE cycle, $T_{detect,EUTRAN_RedCap}$, $T_{measure,EUTRAN_RedCap}$ and $T_{evaluate,\ E\text{-}UTRAN_RedCap}$ are specified in Table 4.2B.2.5-1.

For 1 Rx RedCap and 2 Rx RedCap configured with eDRX_IDLE cycle, $T_{detect,EUTRAN_RedCap}$, $T_{measure,EUTRAN_RedCap}$ and $T_{evaluate,\ E\text{-}UTRAN_RedCap}$ are specified in Table 4.2B.2.5-2, where the requirements apply provided that the serving cell is configured with eDRX_IDLE and is the same in all PTWs during any of $T_{detect,EUTRAN_RedCap}$, $T_{measure,EUTRAN_RedCap}$ and $T_{evaluate,\ E\text{-}UTRAN_RedCap}$ when multiple PTWs are used.

Table 4.2B.2.5-1: $T_{detect,EUTRAN_RedCap}$, $T_{measure,EUTRAN_RedCap}$, and $T_{evaluate,EUTRAN_RedCap}$

DRX cycle length [s]	$T_{detect,EUTRAN}$ [s] (number of DRX cycles)	$T_{measure,EUTRAN}$ [s] (number of DRX cycles)	$T_{evaluate,EUTRAN}$ [s] (number of DRX cycles)
0.32	11.52 (36)	1.28 (4)	5.12 (16)
0.64	17.92 (28)	1.28 (2)	5.12 (8)
1.28	32(25)	1.28 (1)	6.4 (5)
2.56	58.88 (23)	2.56 (1)	7.68 (3)

Table 4.2B.2.5-2: $T_{detect,EUTRAN_RedCap}$, $T_{measure,EUTRAN_RedCap}$, and $T_{evaluate,EUTRAN_RedCap}$ for UE configured with eDRX_IDLE cycle

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	$T_{detect,EUTRAN_RedCap}$ [s] (number of DRX or eDRX cycles Note 3)	$T_{measure,EUTRAN_RedCap}$ [s] (number of DRX or eDRX cycles Note 3)	$T_{evaluate,E-UTRAN_RedCap}$ [s] (number of DRX or eDRX cycles Note 3)
2.56	N/A	N/A	58.88 (23)	2.56 (1)	7.68 (3)
5.12	N/A	N/A	117.76 (23)	5.12 (1)	10.24 (2)
10.24	N/A	N/A	235.52 (23)	10.24 (1)	20.48 (2)
20.48 ≤ eDRX_IDLE cycle length ≤10485.76	0.32	≥1.28 (1)	$eDRX_cycle_length \times \left\lceil \frac{23}{\lceil PTW/DRX_cycle_length \rceil} \right\rceil$ (23)	0.32 (1)	0.64 (2)
	0.64	≥1.28 (1)		0.64 (1)	1.28 (2)
	1.28	≥2.56 (2)		1.28 (1)	2.56 (2)
	2.56	≥5.12 (4)		2.56 (1)	5.12 (2)

NOTE 1: The number of DRX cycles in this table is given for the DRX cycles within PTWs.
NOTE 2: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [34].
NOTE 3: Number of eDRX cycles when eDRX_IDLE cycle length equals 5.12s, number of DRX cycles otherwise.
NOTE 4: The lower bound of PTW length is derived based on $\left\lceil \frac{Tevaluate,E-UTRAN_RedCap * DRX_cycle}{1.28} \right\rceil * 1.28$.
NOTE 5: When eDRX=20.48s and DRX=0.32s, UE is allowed to perform cell evaluation within PTW in every 2 eDRX cycles.

For any requirement in this section, when the UE transitions between any two states when being configured with eDRX_IDLE, being configured with eDRX_IDLE cycle, changing eDRX_IDLE cycle length, or changing PTW configuration, the UE shall meet the transition requirement, which is the less stringent requirement of the two requirements corresponding to the first state and the second state, during the transition time interval which is the time corresponding to the transition requirement. After the transition time interval, the UE shall meet the requirement corresponding to the second state.

4.2B.2.6 Maximum interruption in paging reception for RedCap

The FDD, HD-FDD and TDD RedCap UE shall meet all applicable requirements specified in clause 4.2.2.6. In addition, when the UE is configured with eDRX_IDLE cycle, the UE shall not miss any paging in a PTW provided the paging is sent in at least 2 DRX cycles before the end of that PTW.

The 1 Rx RedCap in HD-FDD shall meet all applicable requirements specified in clause 4.2.2.6 under the following conditions

- at least 1 SSB is available at the UE in the serving cell during the last 160 ms duration.

4.2B.2.7 General requirements for RedCap

The requirements defined in section 4.2.2.7 apply for this section.

4.2B.2.8 Minimum requirement at transitions

When switching from:

low mobility scenario to stationary scenario, or

from low mobility scenario to stationary and not-at-cell-edge scenario,

the UE shall fulfill the requirements corresponding to low mobility scenario over measurement period ($T_{relaxed}$) and thereafter switch to requirements corresponding to stationary scenario, or stationary and not-at-cell-edge scenario. The measurement period, $T_{relaxed}$, is any of:

- $T_{measure,NR_Intra_RedCap_Relax}$ and $T_{evaluate,NR_Intra_RedCap_Relax,}$ defined in section 4.2B.2.9 for intra-frequency measurements on NR cells,
- $T_{measure,NR_Inter_RedCap_Relax}$ and $T_{evaluate,NR_Inter_RedCap_Relax}$ defined in section 4.2B.2.10 for inter-frequency measurements on NR cells and
- $T_{measure,EUTRAN_RedCap_Relax}$ and $T_{evaluate,EUTRAN_RedCap_Relax}$ defined in sections 4.2B.2.11 for inter-RAT E-UTRAN measurements.

When switching from:

stationary scenario to low mobility scenario, or

stationary and not-at-cell-edge scenario to low mobility scenario,

the UE shall fulfill the requirements corresponding to low mobility scenario upon fulfilling the switching criteria.

When switching from normal mode to low mobility scenario, stationary scenario or stationary and not-at-cell edge scenario during cell-reselection period, the UE shall fulfill the requirements corresponding to normal mode over measurement period (T_{normal}) and thereafter switch to requirements corresponding to low mobility scenario, stationary scenario or stationary and not-at-cell edge scenario. The measurement period, T_{normal}, is any of:

- $T_{measure,NR_Intra_RedCap}$ and $T_{evaluate,NR_Intra_RedCap,}$ defined in section 4.2B.2.3 for intra-frequency measurements on NR cells,
- $T_{measure,NR_Inter_RedCap}$ and $T_{evaluate,NR_Inter_RedCap}$ defined in section 4.2B.2.4 for inter-frequency measurements on NR cells and
- $T_{measure,EUTRAN_RedCap}$ and $T_{evaluate,EUTRAN_RedCap}$ defined in sections 4.2B.2.5 for inter-RAT E-UTRAN measurements.

When switching from:

low mobility scenario to normal mode, or

stationary scenario to normal mode, or

stationary and not-at-cell-edge scenario to normal mode

the UE shall fulfill the requirements corresponding to normal mode upon fulfilling the switching criteria.

No requirement is defined for multiple transitions of scenarios within one measurement period.

4.2B.2.9 Measurements of intra-frequency NR cells for UE configured with relaxed measurement criterion for RedCap

4.2B.2.9.1 Introduction

This clause contains the requirements for measurements on intra-frequency NR cells when $Srxlev \leq S_{IntraSearchP}$ or $Squal \leq S_{IntraSearchQ}$ and when the UE is configured any of the following relaxed measurement critera:

- Relaxed measurement criterion for a stationary UE defined in clause 5.2.4.9.3 in [1],

- Relaxed measurement criteria for a stationary UE and not-at-cell edge defined in clause 5.2.4.9.4 in [1],
- Both low mobility criterion and stationary criterion as defined in clause 5.2.4.9.1 and 5.2.4.9.3 or 5.2.4.9.4 in [1] respectively.

The 1 Rx RedCap UE for the evaluation of one or more relaxed measurement criteria defined in clause 5.2.4.9 [1] applies:

- *s-SearchDeltaP-r16* as the signaled value of *s-SearchDeltaP-r16* [2] - 1 dB.
- *s-SearchDeltaP-Stationary-r17* as the signaled value of *s-SearchDeltaP-Stationary-r17* [2] - 1 dB.
- *s-SearchThresholdP-r16* as the signaled value of *s-SearchThresholdP-r16* [2] + 1 dB.
- *s-SearchThresholdQ-r16* as the signaled value of *s-SearchThresholdQ-r16 [*2] + 1 dB.
- *s-SearchThresholdP2-r17* as the signaled value of *s-SearchThresholdP2-r17* [2] + 1 dB.
- *s-SearchThresholdQ2-r17* as the signaled value of *s-SearchThresholdQ2-r17* [2] + 1 dB.

4.2B.2.9.2 Measurements for UE fulfilling stationary criterion

This clause contains requirements for measurements on intra-frequency NR cells provided that:

- UE is configured with *stationaryMobilityEvaluation* [2] criterion and UE has fulfilled that criterion, or
- UE is configured with both *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluationWhileStationary* [2] criterion and *combineRelaxedMeasCondition2* [2] not configured, and UE has fulfilled only the *stationaryMobilityEvaluation* [2] criterion

The requirements defined in clause 4.2B.2.3 apply for this clause except that:

- $T_{detect,NR_Intra_RedCap_Relax}$ as specified in Table 4.2B.2.9.2-1 and Table 4.2B.2.9.2-2 for 1 Rx RedCap and 2 Rx RedCap respectively.
- $T_{measure,NR_Intra_RedCap_Relax}$ as specified in Table 4.2B.2.9.2-1 and Table 4.2B.2.9.2-2 for 1 Rx RedCap and 2 Rx RedCap respectively.
- $T_{evaluate,NR_Intra_RedCap_Relax}$ as specified in Table 4.2B.2.9.2-1 and Table 4.2B.2.9.2-2 for 1 Rx RedCap and 2 Rx RedCap respectively.

If the UE is configured with eDRX_IDLE cycle then the requirements in Table 4.2B.2.9.2-3 and Table 4.2B.2.9.2-4 are applicable for eDRX cycle up to 10.24 s in FR1 and FR2 respectively.

If the UE is configured with eDRX_IDLE cycle greater than 10.24 s in FR1 and FR2, then the requirements in Table Table 4.2B.2.9.2-5 and Table 4.2B.2.9.2-6 respectively apply provided eDRX cycle is $\leq$ [163.84] sec and evaluation/measurement time with relaxation on one carrier is not greater than single PTW window length.

Table 4.2B.2.9.2-1: $T_{detect,NR_Intra_RedCap_Relax}$, $T_{measure,NR_Intra_RedCap_Relax}$ and $T_{evaluate,NR_Intra_RedCap_Relax}$ for UEs fulfilling stationary criterion for 1 Rx RedCap UE

DRX cycle length [s]	$T_{detect,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{measure,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles)
0.32	11.52 x M2 x K3 (36 x M2 x K3)	1.28 x M2 x K3 (4 x M2 x K3)	5.12 x M2 x K3 (16 x M2 x K3)
0.64	17.92 x K3 (28 x K3)	1.28 x K3 (2 x K3)	5.12 x K3 (8 x K3)
1.28	32 x K3 (25 x K3)	1.28x K3 (1 x K3)	6.4 x K3 (5 x K3)
2.56	58.88 x K3 (23 x K3)	2.56 x K3 (1 x K3)	7.68 x K3 (3 x K3)

Note 1: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1. If different SMTC periodicities are configured for different cells, the SMTC periodicity in this note is the one used by the cell being identified. During PSS/SSS detection, the periodicity of the SMTC configured for the intra-frequency carrier is assumed, and if the actual SSB transmission periodicity is greater than the SMTC configured for the intra-frequency carrier, longer T_{detect, NR_intra} is expected.
Note 2: K3 = 6 is the measurement relaxation factor applicable for UE fulfilling the *stationaryMobilityEvaluation* [2] criterion.

Table 4.2B.2.9.2-2: $T_{detect,NR_Intra_RedCap_Relax}$, $T_{measure,NR_Intra_RedCap_Relax}$ and $T_{evaluate,NR_Intra_RedCap_Relax}$ for UEs fulfilling stationary criterion for 2 Rx RedCap UE

DRX cycle length [s]	Scaling Factor (N1)		$T_{detect,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{measure,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles)
	FR1	FR2[Note1]			
0.32	1	8	11.52 x N1 x M2 x K3 (36 x N1 x M2 x K3)	1.28 x N1 x M2 x K3 (4 x N1 x M2 x K3)	5.12 x N1 x M2 x K3 (16 x N1 x M2 x K3)
0.64		5	17.92 x N1 x K3 (28 x N1 x K3)	1.28 x N1 x K3 (2 x N1 x K3)	5.12 x N1 x K3 (8 x N1 x K3)
1.28		4	32 x N1 x K3 (25 x N1 x K3)	1.28 x N1 x K3 (1 x N1 x K3)	6.4 x N1 x K3 (5 x N1 x K3)
2.56		3	58.88 x N1 x K3 (23 x N1 x K3)	2.56 x N1 x K3 (1 x N1 x K3)	7.68 x N1 x K3 (3 x N1 x K3)

Note 1: Applies for RedCap UE of all supporting FR2 power classes.
Note 2: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1. If different SMTC periodicities are configured for different cells, the SMTC periodicity in this note is the one used by the cell being identified. During PSS/SSS detection, the periodicity of the SMTC configured for the intra-frequency carrier is assumed, and if the actual SSB transmission periodicity is greater than the SMTC configured for the intra-frequency carrier, longer T_{detect, NR_intra} is expected.
Note 3: K3 = 6 is the measurement relaxation factor applicable for UE fulfilling the *stationaryMobilityEvaluation* [2] criterion.

Table 4.2B.2.9.2-3: $T_{detect,NR_Intra_RedCap_Relax}$, $T_{measure,NR_Intra_RedCap_Relax}$ and $T_{evaluate,NR_Intra_RedCap_Relax}$ for UE configured with eDRX_IDLE cycle (Frequency range FR1) for eDRX_IDLE cycle upto 10.24 s

eDRX_IDLE cycle length [s]	$T_{detect,NR_Intra_RedCap_Relax}$ [s] (number of eDRX IDLE cycles)	$T_{measure,NR_Intra_RedCap_Relax}$ [s] (number of eDRX IDLE cycles)	$T_{evaluate,NR_Intra_RedCap_Relax}$ [s] (number of eDRX IDLE cycles)
2.56	58.88 x K3 (23 x K3)	2.56 x K3 (1 x K3)	7.68 x K3 (3 x K3)
5.12	117.76 x K3 (23 x K3)	5.12 x K3 (1 x K3)	10.24 x K3 (2 x K3)
10.24	235.52 x K3 (23 x K3)	10.24 x K3 (1 x K3)	20.48 x K3 (2 x K3)

Note 1: K3 = 6 is the measurement relaxation factor applicable for UE fulfilling the *stationaryMobilityEvaluation* [2] criterion.

Table 4.2B.2.9.2-4: $T_{detect,NR_Intra_RedCap_Relax}$, $T_{measure,NR_Intra_RedCap_Relax}$ and $T_{evaluate,NR_Intra_RedCap_Relax}$ for UE configured with eDRX_IDLE cycle (Frequency range FR2) for eDRX_IDLE cycle upto 10.24 s

eDRX_IDLE cycle length [s]	$T_{detect,NR_Intra_RedCap_Relax}$ [s] (number of eDRX IDLE cycles)	$T_{measure,NR_Intra_RedCap_Relax}$ [s] (number of eDRX IDLE cycles)	$T_{evaluate,NR_Intra_RedCap_Relax}$ [s] (number of eDRX IDLE cycles)
2.56	58.88 x N1 x K3 (23 x N1 x K3)	2.56 x N1 x K3 (1 x N1 x K3)	7.68 x N1 x K3 (3 x N1 x K3)
5.12	117.76 x N1 x K3 (23 x N1 x K3)	5.12 x N1 x K3 (1 x N1 x K3)	10.24 x N1 x K3 (2 x N1 x K3)

10.24	235.52 x N1 x K3 (23 x N1 x K3)	10.24 x N1 x K3 (1 x N1 x K3)	20.48 x N1 x K3 (2 x N1 x K3)
Note 1: K3 = 6 is the measurement relaxation factor applicable for UE fulfilling the *stationaryMobilityEvaluation* [2] criterion.			

Table 4.2B.2.9.2-5: $T_{detect,NR_Intra_RedCap_Relax}$, $T_{measure,NR_Intra_RedCap_Relax}$ and $T_{evaluate,NR_Intra_RedCap_Relax}$ for UE configured with eDRX_IDLE cycle (Frequency range FR1)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	$T_{detect,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)	$T_{measure,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)	$T_{evaluate,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)
20.48 ≤ eDRX_IDLE cycle length ≤[163.84]	0.32	≥[6.4] ([5])	$eDRX_cycle_length \times \left\lceil \frac{23}{PTW/DRX_cycle_length} \right\rceil$ x K3 (23 x K3)	0.32 x M2 x K3 (1 x M2 x K3)	0.64 x M2 x K3 (2 x M2 x K3)
	0.64	≥[12.8] ([10])		0.64 x K3 (1 x K3)	1.28 x K3 (2 x K3)
	1.28	≥[15.36] ([12])		1.28 x K3 (1 x K3)	2.56 x K3 (2 x K3)
	2.56	≥[30.72] ([24])		2.56 x K3 (1 x K3)	5.12 x K3 (2 x K3)

Note 1: The number of DRX cycles in this table is given for the DRX cycles within PTWs.
Note 2: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [34].
Note 3: The lower bound of PTW length is derived based on $\left\lceil \frac{Tevaluate,NR_Intra_RedCap_Relax * DRX_cycle}{1.28} \right\rceil * 1.28$.
Note 4: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1. If different SMTC periodicities are configured for different cells, the SMTC periodicity in this note is the one used by the cell being identified. During PSS/SSS detection, the periodicity of the SMTC configured for the intra-frequency carrier is assumed, and if the actual SSB transmission periodicity is greater than the SMTC configured for the intra-frequency carrier, longer $T_{detect, NR_intra_RedCap}$ is expected.
Note 5: K3 = 6 is the measurement relaxation factor applicable for UE fulfilling the stationaryMobilityEvaluation [2] criterion.

Table 4.2B.2.9.2-6: $T_{detect,NR_Intra_RedCap_Relax}$, $T_{measure,NR_Intra_RedCap_Relax}$ and $T_{evaluate,NR_Intra_RedCap_Relax}$ for UE configured with eDRX_IDLE cycle (Frequency range FR2)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	Scaling Factor (N1) Note1	$T_{detect,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)	$T_{measure,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)	$T_{evaluate,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)
20.48 ≤ eDRX_IDLE cycle length ≤[163.84]	0.32	≥30.72 (24)	8	K3 x $eDRX_cycle_length \times \left\lceil \frac{23 \times N1}{PTW/DRX_cycle_length} \right\rceil$ (23 x N1 x K3)	0.32 x N1 x K3 (1 x N1 x K3)	0.64 x N1 x K3 (2 x N1 x K3)
	0.64	≥38.4 (30)	5		0.64 x N1 x K3 (1 x N1 x K3)	1.28 x N1 x K3 (2 x N1 x K3)
	1.28	40.96 (32)	4		1.28 x N1 x K3 (1 x N1 x K3)	2.56 x N1 x K3 (2 x N1 x K3)
	2.56	40.96 (32)	3		20.48	40.96

Note 1: Applies for RedCap UE of all supporting FR2 power classes.
Note 2: The number of DRX cycles in this table is given for the DRX cycles within PTWs.

Note 3: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [34].
Note 4: The lower bound of PTW length is derived based on $\left\lceil \frac{T_{evaluate,NR_Intra_RedCap_Relax} * DRX_cycle}{1.28} \right\rceil * 1.28$.
Note 5: The measurement shall not be performed across PTW's. In this case the measurement is performed in the next available PTW.
Note 6: The evaluation shall not be performed across PTW's. In this case the evaluation is performed in the next available PTW.
Note 7: For DRX cycle length is 0.32s, 0.64s, and 2.56s, K3 = 6 is the measurement relaxation factor applicable for UE fulfilling the stationaryMobilityEvaluation [2] criterion. For DRX cycle length is 1.28s, K3 = 4 is the measurement relaxation factor applicable for UE fulfilling the stationaryMobilityEvaluation [2] criterion.

4.2B.2.9.3 Measurements for a UE fulfilling stationary and not-at-cell edge criteria

This clause contains requirements for measurements on intra-frequency NR cells provided that:

- UE is configured with both *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluationWhileStationary* [2] criterion, and
- has also fulfilled both criteria, and,
- less than 4 hours have passed since measurements for cell reselection were last performed

The requirments defined in this clause apply regardless of eDRX_IDLE configurations.

In this case the UE is not required to meet $T_{detect,NR_Intra_RedCap}$, $T_{measure,NR_Intra_RedCap}$ and $T_{evaluate,NR_Intra_RedCap}$ as defined in clause 4.2B.2.3.

4.2B.2.9.3A Measurements for a UE fulfilling stationary and Rel-16 not at cell edge criteria

- UE is configured with both *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluation* [2] criterion, and has also fulfilled both criteria, or
- UE is configured with *cellEdgeEvaluation* [2] criterion and with both *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluationWhileStationary* [2] criterion and *combineRelaxedMeasCondition2* [2] not configured, and UE has fulfilled *cellEdgeEvaluation* and *stationaryMobilityEvaluation* [2] criteria

The requirements defined in clause 4.2B.2.3 apply for this clause except that:

- $T_{detect,NR_Intra_RedCap_Relax}$ as specified in Table 4.2B.2.9.2-1 and Table 4.2B.2.9.2-2 for 1 Rx RedCap and 2 Rx RedCap respectively.
- $T_{measure,NR_Intra_RedCap_Relax}$ as specified in Table 4.2B.2.9.2-1 and Table 4.2B.2.9.2-2 for 1 Rx RedCap and 2 Rx RedCap respectively.
- $T_{evaluate,NR_Intra_RedCap_Relax}$ as specified in Table 4.2B.2.9.2-1 and Table 4.2B.2.9.2-2 for 1 Rx RedCap and 2 Rx RedCap respectively.

If the UE is configured with eDRX_IDLE cycle then the requirements in Table 4.2B.2.9.2-3 and Table 4.2B.2.9.2-4 are applicable for eDRX cycle up to 10.24 s in FR1 and FR2 respectively.

If the UE is configured with eDRX_IDLE cycle greater than 10.24 s in FR1 and FR2, then the requirements in Table Table 4.2B.2.9.2-5 and Table 4.2B.2.9.2-6 respectively apply provided eDRX cycle is $\leq$ [163.84] sec and evaluation/measurement time with relaxation on one carrier is not greater than single PTW window length.

4.2B.2.9.4 Measurements for a UE fulfilling low mobility and stationary criteria

This clause contains requirements for measurements on intra-frequency NR cells provided that:

- UE is configured with *lowMobilityEvaluation* [2] criterion and *stationaryMobilityEvaluation* [2] criterion, and has also fulfilled both criteria, or,

- UE is configured with *lowMobilityEvaluation* [2] criterion and with both *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluationWhileStationary* [2] criterion and *combineRelaxedMeasCondition2* [2] not configured, and UE has fulfilled *lowMobilityEvaluation* and *stationaryMobilityEvaluation* [2] criteria

The requirements defined in clause 4.2B.2.9.2 apply for this clause.

4.2B.2.9.5 Measurements for a UE fulfilling low mobility criterion and stationary and not-at-cell edge criteria

This clause contains requirements for measurements on intra-frequency NR cells provided that:

- UE is configured with *lowMobilityEvaluation* [2] criterion and UE has fulfilled this criterion, and
- UE is configured with *stationaryMobilityEvaluation* [2] and *cellEdgeEvaluationWhileStationary* [2] criterion, and UE has also fulfilled both criteria

The requirements defined in clause 4.2B.2.9.3 apply for this clause.

4.2B.2.9.6 Measurements for a UE fulfilling not-at-cell edge criterion and stationary and not-at-cell edge criteria

This clause contains requirements for measurements on intra-frequency NR cells provided that:

- UE is configured with cellEdgeEvaluation [2] criterion and UE has fulfilled that criterion, and
- UE is configured with *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluationWhileStationary* [2] criterion, and has also fulfilled both criteria

The requirements defined in clause 4.2B.2.9.3 apply for this clause.

4.2B.2.9.7 Measurements for a UE fulfilling low mobility and not-at-cell edge criteria and stationary and notatcell edge criteria

This clause contains requirements for measurements on intra-frequency NR cells provided that:

- UE is configured with both *lowMobilityEvaluation* [2] criterion and *cellEdgeEvaluation* [2] criterion, and has fulfilled both criteria, and
- UE is configured with *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluationWhileStationary* [2] criterion, and has also fulfilled both criteria

The requirements defined in clause 4.2B.2.9.3 apply for this clause.

4.2B.2.9.8 Measurements for a UE fulfilling low mobility and not-at-cell edge criteria and stationary criterion

This clause contains requirements for measurements on intra-frequency NR cells provided that:

- UE is configured with both *lowMobilityEvaluation* [2] criterion and *cellEdgeEvaluation* [2] criterion, and has fulfilled both criteria, and
- UE is configured with *stationaryMobilityEvaluation* [2] criterion and has also fulfilled that criterion, or UE is configured with both *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluationWhileStationary* [2]

criterion and *combineRelaxedMeasCondition2* [2] not configured, and UE has fulfilled *stationaryMobilityEvaluation* [2] criteria

The requirements defined in clause 4.2.2.9.4 apply for this clause.

4.2B.2.9.9 Measurements for UE fulfilling low mobility criterion

This clause contains requirements for measurements on intra-frequency NR cells provided that:

- UE is configured with *lowMobilityEvaluation* [2] criterion and UE has fulfilled, or
- UE is configured with both *lowMobilityEvaluation* [2] criterion and *cellEdgeEvaluation* [2] criterion and *combineRelaxedMeasCondition* [2] not configured, and UE has fulfilled only the *lowMobilityEvaluation* [2] criterion.

The requirements defined in clause 4.2B.2.3 apply for this clause except that:

- $T_{detect,NR_Intra_RedCap_Relax}$ as specified in Table 4.2B.2.9.9-1 and Table 4.2B.2.9.9-2 for 1 Rx RedCap and 2 Rx RedCap respectively.
- $T_{measure,NR_Intra_RedCap_Relax}$ as specified in Table 4.2B.2.9.9-1 and Table 4.2B.2.9.9-2 for 1 Rx RedCap and 2 Rx RedCap respectively.
- $T_{evaluate,NR_Intra_RedCap_Relax}$ as specified in Table 4.2B.2.9.9-1 and Table 4.2B.2.9.9-2 for 1 Rx RedCap and 2 Rx RedCap respectively.

If the UE is configured with eDRX_IDLE cycle then the requirements in Table 4.2B.2.9.9-3 and Table 4.2B.2.9.9-4 are applicable for eDRX cycle up to 10.24 s in FR1 and FR2, respectively.

If the UE is configured with eDRX_IDLE cycle greater than 10.24 s in FR1 and FR2, then the requirements in Table Table 4.2B.2.9.9-5 and Table 4.2B.2.9.9-6 respectively apply provided eDRX cycle is ≤ [163.84] sec and evaluation/measurement time with relaxation on one carrier is not greater than single PTW window length.

Table 4.2B.2.9.9-1: $T_{detect,NR_Intra_RedCap_Relax}$, $T_{measure,NR_Intra_RedCap_Relax}$ and $T_{evaluate,NR_Intra_RedCap_Relax}$ for UEs fulfilling low mobility criterion for 1 Rx RedCap UE

DRX cycle length [s]	$T_{detect,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{measure,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles)
0.32	11.52 x M2 x K1 (36 x M2 x K1)	1.28 x M2 x K1 (4 x M2 x K1)	5.12 x M2 x K1 (16 x M2 x K1)
0.64	17.92 x K1 (28 x K1)	1.28 x K1 (2 x K1)	5.12 x K1 (8 x K1)
1.28	32 x K1 (25 x K1)	1.28 x K1 (1 x K1)	6.4 x K1 (5 x K1)
2.56	58.88 x K1 (23 x K1)	2.56 x K1 (1 x K1)	7.68 x K1 (3 x K1)
Note 1: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1. Note 2: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the *lowMobilityEvaluation* [2] criterion.			

Table 4.2B.2.9.9-2: $T_{detect,NR_Intra_RedCap_Relax}$, $T_{measure,NR_Intra_RedCap_Relax}$ and $T_{evaluate,NR_Intra_RedCap_Relax}$ for UEs fulfilling low mobility criterion for 2 Rx RedCap UE

DRX cycle length [s]	Scaling Factor (N1)		$T_{detect,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{measure,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles)
	FR1	FR2[Note1]			
0.32	1	8	11.52 x N1 x M2 x K1 (36 x N1 x M2 x K1)	1.28 x N1 x M2 x K1 (4 x N1 x M2 x K1)	5.12 x N1 x M2 x K1 (16 x N1 x M2 x K1)
0.64		5	17.92 x N1 x K1 (28 x N1 x K1)	1.28 x N1 x K1 (2 x N1 x K1)	5.12 x N1 x K1 (8 x N1 x K1)

1.28		4	32 x N1 x K1 (25 x N1 x K1)	1.28 x N1 x K1 (1 x N1 x K1)	6.4 x N1 x K1 (5 x N1 x K1)
2.56		3	58.88 x N1 x K1 (23 x N1 x K1)	2.56 x N1 x K1 (1 x N1 x K1)	7.68 x N1 x K1 (3 x N1 x K1)
Note 1: Applies for RedCap UE of all supporting FR2 power classes. Note 2: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1. Note 3: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the *lowMobilityEvaluation* [2] criterion.					

Table 4.2B.2.9.9-3: $T_{detect,NR_Intra_RedCap_Relax}$, $T_{measure,NR_Intra_RedCap_Relax}$ and $T_{evaluate,NR_Intra_RedCap_Relax}$ for UE configured with eDRX_IDLE cycle (Frequency range FR1) for eDRX_IDLE cycle upto 10.24 s

DRX_IDLE cycle length [s]	$T_{detect,NR_Intra_RedCap_Relax}$ [s] (number of eDRX IDLE cycles)	$T_{measure,NR_Intra_RedCap_Relax}$ [s] (number of eDRX IDLE cycles)	$T_{evaluate,NR_Intra_RedCap_Relax}$ [s] (number of eDRX IDLE cycles)
2.56	58.88 x K1 (23 x K1)	2.56 x K1 (1 x K1)	7.68 x K1 (3 x K1)
5.12	117.76 x K1 (23 x K1)	5.12 x K1 (1 x K1)	10.24 x K1 (2 x K1)
10.24	235.52 x K1 (23 x K1)	10.24 x K1 (1 x K1)	20.48 x K1 (2 x K1)
Note 1: Applies for RedCap UE of all supporting FR2 power classes. Note 2: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the *lowMobilityEvaluation* [2] criterion.			

Table 4.2B.2.9.9-4: $T_{detect,NR_Intra_RedCap_Relax}$, $T_{measure,NR_Intra_RedCap_Relax}$ and $T_{evaluate,NR_Intra_RedCap_Relax}$ for UE configured with eDRX_IDLE cycle (Frequency range FR2) for eDRX_IDLE cycle upto 10.24 s

DRX_IDLE cycle length [s]	$T_{detect,NR_Intra_RedCap_Relax}$ [s] (number of eDRX IDLE cycles)	$T_{measure,NR_Intra_RedCap_Relax}$ [s] (number of eDRX IDLE cycles)	$T_{evaluate,NR_Intra_RedCap_Relax}$ [s] (number of eDRX IDLE cycles)
2.56	58.88 x N1 x K1 (23 x N1 x K1)	2.56 x N1 x K1 (1 x N1 x K1)	7.68 x N1 x K1 (3 x N1 x K1)
5.12	117.76 x N1 x K1 (23 x N1 x K1)	5.12 x N1 x K1 (1 x N1 x K1)	10.24 x N1 x K1 (2 x N1 x K1)
10.24	235.52 x N1 x K1 (23 x N1 x K1)	10.24 x N1 x K1 (1 x N1 x K1)	20.48 x N1 x K1 (2 x N1 x K1)
Note 1: Applies for RedCap UE of all supporting FR2 power classes. Note 2: N1 = 3. Note 3: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the *lowMobilityEvaluation* [2] criterion.			

Table 4.2B.2.9.9-5: $T_{detect,NR_Intra_RedCap_Relax}$, $T_{measure,NR_Intra_RedCap_elax}$ and $T_{evaluate,NR_Intra_RedCap_Relax}$ for UE configured with eDRX_IDLE cycle (Frequency range FR1)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	$T_{detect,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)	$T_{measure,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)	$T_{evaluate,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)
20.48 ≤ eDRX_IDLE cycle length ≤[163.84]	0.32	≥[3.84] ([3])	$\frac{eDRX_cycle_length}{\left\lfloor \frac{23}{PTW/DRX_cycle_length} \right\rfloor} \times$ (23 x K1)	0.32 x M2 x K1 (1 x M2 x K1)	0.64 x M2 x K1 (2 x M2 x K1)
	0.64	≥[3.84] ([3])		0.64 x K1 (1 x K1)	1.28 x K1 (2 x K1)
	1.28	≥[7.68] ([6])		1.28 x K1 (1 x K1)	2.56 x K1 (2 x K1)

	2.56	≥[15.36] ([12])		2.56 x K1 (1 x K1)	5.12 x K1 (2 x K1)

Note 1: The number of DRX cycles in this table is given for the DRX cycles within PTWs.
Note 2: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [34].
Note 3: The lower bound of PTW length is derived based on $\left\lceil \frac{T_{evaluate,NR_Intra_RedCap} * DRX_cycle}{1.28} \right\rceil * 1.28$.
Note 4: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1.
Note 5: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the *lowMobilityEvaluation* [2] criterion.

Table 4.2B.2.9.9-6: $T_{detect,NR_Intra_RedCap_Relax}$, $T_{measure,NR_Intra_RedCap_Relax}$ and $T_{evaluate,NR_Intra_RedCap_Relax}$ for UE configured with eDRX_IDLE cycle (Frequency range FR2)

eDRX_IDLE cycle length [s]	**DRX cycle length [s]**	**PTW length [s] (number of 1.28s periods)**	**Scaling Factor (N1)** Note1	**$T_{detect,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)**	**$T_{measure,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)**	**$T_{evaluate,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)**
20.48 ≤ eDRX_IDLE cycle length ≤[163.84]	0.32	≥15.36 (12)	8	K1 x $eDRX_cycle_length \times \left\lceil \frac{23 \times N1}{PTW/DRX_cycle_length} \right\rceil$ (23 x N1 x K1)	0.32 x N1 x K1 (1 x N1 x K1)	0.64 x N1 x K1 (2 x N1 x K1)
	0.64	≥19.2 (15)	5		0.64 x N1 x K1 (1 x N1 x K1)	1.28 x N1 x K1 (2 x N1 x K1)
	1.28	≥30.72 (24)	4		1.28 x N1 x K1 (1 x N1 x K1)	2.56 x N1 x K1 (2 x N1 x K1)
	2.56	40.96 (32)	3		20.48	40.96

Note 1: Applies for RedCap UE of all supporting FR2 power classes.
Note 2: The number of DRX cycles in this table is given for the DRX cycles within PTWs.
Note 3: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [34].
Note 4: The lower bound of PTW length is derived based on $\left\lceil \frac{T_{evaluate,NR_Intra_RedCap} * DRX_cycle}{1.28} \right\rceil * 1.28$.
Note 5: The measurement shall not be performed across PTW's. In this case the measurement is performed in the next available PTW.
Note 6: The evaluation shall not be performed across PTW's.
Note 7: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the *lowMobilityEvaluation criterion* [2].

4.2B.2.9.10 Measurements for UE fulfilling not-at-cell edge criterion

This clause contains requirements for measurements on intra-frequency NR cells provided that:

- UE is configured with *cellEdgeEvaluation* [2] criterion and UE has fulfilled, or
- UE is configured with both *lowMobilityEvaluation* [2] criterion and *cellEdgeEvaluation* [2] criteria and *combineRelaxedMeasCondition* [2] not configured, and UE has fulfilled only the *cellEdgeEvaluation* [2] criterion.

The requirements defined in clause 4.2B.2.3 apply for this clause except that:

- $T_{detect,NR_Intra_RedCap_Relax}$ as specified in Table 4.2B.2.9.10-1 and Table 4.2B.2.9.10-2 for 1 Rx RedCap and 2 Rx RedCap respectively.
- $T_{measure,NR_Intra_RedCap_Relax}$ as specified in Table 4.2B.2.9.10-1 and Table 4.2B.2.9.10-2 for 1 Rx RedCap and 2 Rx RedCap respectively.
- $T_{evaluate,NR_Intra_RedCap_Relax}$ as specified in Table 4.2B.2.9.10-1 and Table 4.2B.2.9.10-2 for 1 Rx RedCap and 2 Rx RedCap respectively.

If the UE is configured with eDRX_IDLE cycle then the requirements in Table 4.2B.2.9.10-3 and Table 4.2B.2.9.10-4 are applicable for eDRX cycle up to 10.24 s in FR1 and FR2, respectively.

If the UE is configured with eDRX_IDLE cycle greater than 10.24 s in FR1 and FR2, then the requirements in Table Table 4.2B.2.9.10-5 and Table 4.2B.2.9.10-6 respectively apply provided eDRX cycle is $\leq$ [163.84] sec and evaluation/measurement time with relaxation on one carrier is not greater than single PTW window length.

Table 4.2B.2.9.10-1: $T_{detect,NR_Intra_RedCap_Relax}$, $T_{measure,NR_Intra_RedCap_Relax}$ and $T_{evaluate,NR_Intra_RedCap_Relax}$ for UEs fulfilling not-at-cell edge criterion for 1 Rx RedCap UE

DRX cycle length [s]	$T_{detect,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{measure,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles)
0.32	11.52 x M2 x K1 (36 x M2 x K1)	1.28 x M2 x K1 (4 x M2 x K1)	5.12 x M2 x K1 (16 x M2 x K1)
0.64	17.92 x K1 (28 x K1)	1.28 x K1 (2 x K1)	5.12 x K1 (8 x K1)
1.28	32 x K1 (25 x K1)	1.28 x K1 (1 x K1)	6.4 x K1 (5 x K1)
2.56	58.88 x K1 (23 x K1)	2.56 x K1 (1 x K1)	7.68 x K1 (3 x K1)
Note 1: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1. Note 2: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the *cellEdgeEvaluation* [2] criterion.			

Table 4.2B.2.9.10-2: $T_{detect,NR_Intra_RedCap_Relax}$, $T_{measure,NR_Intra_RedCap_Relax}$ and $T_{evaluate,NR_Intra_RedCap_Relax}$ for UEs fulfilling not-at-cell edge criterion for 2 Rx RedCap UE

DRX cycle length [s]	Scaling Factor (N1)		$T_{detect,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{measure,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles)
	FR1	FR2[Note1]			
0.32	1	8	11.52 x N1 x M2 x K1 (36 x N1 x M2 x K1)	1.28 x N1 x M2 x K1 (4 x N1 x M2 x K1)	5.12 x N1 x M2 x K1 (16 x N1 x M2 x K1)
0.64		5	17.92 x N1 x K1 (28 x N1 x K1)	1.28 x N1 x K1 (2 x N1 x K1)	5.12 x N1 x K1 (8 x N1 x K1)
1.28		4	32 x N1 x K1 (25 x N1 x K1)	1.28 x N1 x K1 (1 x N1 x K1)	6.4 x N1 x K1 (5 x N1 x K1)
2.56		3	58.88 x N1 x K1 (23 x N1 x K1)	2.56 x N1 x K1 (1 x N1 x K1)	7.68 x N1 x K1 (3 x N1 x K1)
Note 1: Applies for RedCap UE of all supporting FR2 power classes. Note 2: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1. Note 3: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the *cellEdgeEvaluation* [2] criterion.					

Table 4.2B.2.9.10-3: $T_{detect,NR_Intra_RedCap_Relax}$, $T_{measure,NR_Intra_RedCap_Relax}$ and $T_{evaluate,NR_Intra_RedCap_Relax}$ for UE configured with eDRX_IDLE cycle (Frequency range FR1) for eDRX_IDLE cycle upto 10.24 s

DRX_IDLE cycle length [s]	$T_{detect,NR_Intra_RedCap_Relax}$ [s] (number of eDRX IDLE cycles)	$T_{measure,NR_Intra_RedCap_Relax}$ [s] (number of eDRX IDLE cycles)	$T_{evaluate,NR_Intra_RedCap_Relax}$ [s] (number of eDRX IDLE cycles)
2.56	58.88 x K1 (23 x K1)	2.56 x K1 (1 x K1)	7.68 x K1 (3 x K1)
5.12	117.76 x K1 (23 x K1)	5.12 x K1 (1 x K1)	10.24 x K1 (2 x K1)
10.24	235.52 x K1 (23 x K1)	10.24 x K1 (1 x K1)	20.48 x K1 (2 x K1)
Note 1: Applies for RedCap UE of all supporting FR2 power classes. Note 2: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the *cellEdgeEvaluation* [2] criterion.			

Table 4.2B.2.9.10-4: $T_{detect,NR_Intra_RedCap_Relax}$, $T_{measure,NR_Intra_RedCap_Relax}$ and $T_{evaluate,NR_Intra_RedCap_Relax}$ for UE configured with eDRX_IDLE cycle (Frequency range FR2) for eDRX_IDLE cycle upto 10.24 s

DRX_IDLE cycle length [s]	$T_{detect,NR_Intra_RedCap_Relax}$ [s] (number of eDRX IDLE cycles)	$T_{measure,NR_Intra_RedCap_Relax}$ [s] (number of eDRX IDLE cycles)	$T_{evaluate,NR_Intra_RedCap_Relax}$ [s] (number of eDRX IDLE cycles)

2.56	58.88 x N1 x K1 (23 x N1 x K1)	2.56 x N1 x K1 (1 x K1)	7.68 x N1 x K1 (3 x N1 x K1)
5.12	117.76 x N1 x K1 (23 x N1 x K1)	5.12 x N1 x K1 (1 x N1 x K1)	10.24 x N1 x K1 (2 x N1 x K1)
10.24	235.52 x N1 x K1 (23 x N1 x K1)	10.24 x N1 x K1 (1 x N1 x K1)	20.48 x N1 x K1 (2 x N1 x K1)
Note 1: Applies for RedCap UE of all supporting FR2 power classes. Note 2: N1 = 3. Note 3: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the *cellEdgeEvaluation* [2] criterion.			

Table 4.2B.2.9.10-5: $T_{detect,NR_Intra_RedCap_Relax}$, $T_{measure,NR_Intra_RedCap_elax}$ and $T_{evaluate,NR_Intra_RedCap_Relax}$ for UE configured with eDRX_IDLE cycle (Frequency range FR1)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	$T_{detect,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)	$T_{measure,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)	$T_{evaluate,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)
20.48 ≤ eDRX_IDLE cycle length ≤[163.84]	0.32	≥[3.84] ([3])	$eDRX_cycle_length \times \left\lceil \frac{23}{PTW/DRX_cycle_length} \right\rceil$ x K1 (23 x K1)	0.32 x M2 x K1 (1 x M2 x K1)	0.64 x M2 x K1 (2 x M2 x K1)
	0.64	≥[3.84] ([3])		0.64 x K1 (1 x K1)	1.28 x K1 (2 x K1)
	1.28	≥[7.68] ([6])		1.28 x K1 (1 x K1)	2.56 x K1 (2 x K1)
	2.56	≥[15.36] ([12])		2.56 x K1 (1 x K1)	5.12 x K1 (2 x K1)
Note 1: The number of DRX cycles in this table is given for the DRX cycles within PTWs. Note 2: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [34]. Note 3: The lower bound of PTW length is derived based on $\left\lceil \frac{Tevaluate,NR_Intra_RedCap * DRX_cycle}{1.28} \right\rceil * 1.28$. Note 4: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1. Note 5: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the *cellEdgeEvaluation* [2] criterion.					

Table 4.2B.2.9.10-6: $T_{detect,NR_Intra_RedCap_Relax}$, $T_{measure,NR_Intra_RedCap_Relax}$ and $T_{evaluate,NR_Intra_RedCap_Relax}$ for UE configured with eDRX_IDLE cycle (Frequency range FR2)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	Scaling Factor (N1) Note1	$T_{detect,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)	$T_{measure,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)	$T_{evaluate,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)
20.48 ≤ eDRX_IDLE cycle length ≤[163.84]	0.32	≥15.36 (12)	8	K1 x $eDRX_cycle_length \times \left\lceil \frac{23 \times N1}{PTW/DRX_cycle_length} \right\rceil$ (23 x N1 x K1)	0.32 x N1 x K1 (1 x N1 x K1)	0.64 x N1 x K1 (2 x N1 x K1)
	0.64	≥19.2 (15)	5		0.64 x N1 x K1 (1 x N1 x K1)	1.28 x N1 x K1 (2 x N1 x K1)
	1.28	≥30.72 (24)	4		1.28 x N1 x K1 (1 x N1 x K1)	2.56 x N1 x K1 (2 x N1 x K1)
	2.56	40.96 (32)	3		20.48	40.96

Note 1:	Applies for RedCap UE of all supporting FR2 power classes.
Note 2:	The number of DRX cycles in this table is given for the DRX cycles within PTWs.
Note 3:	The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [34].
Note 4:	The lower bound of PTW length is derived based on $\left\lceil \frac{T_{evaluate,NR_Intra_RedCap} * DRX_cycle}{1.28} \right\rceil * 1.28$.
Note 5:	The measurement shall not be performed across PTW's. In this case the measurement is performed in the next available PTW.
Note 6:	The evaluation shall not be performed across PTW's.
Note 7:	K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the *cellEdgeEvaluation criterion* [2].

4.2B.2.9.11 Measurements for UE fulfilling low mobility and not-at-cell edge criteria

This clause contains requirements for measurements on intra-frequency NR cells provided that:

- UE is configured with both *lowMobilityEvaluation* [2] criterion and *cellEdgeEvaluation* [2] criterion, and
- has also fulfilled both criteria, and
- less than 1 hour have passed since measurements for cell reselection were last performed

In this case the UE is not required to meet $T_{detect,NR_Intra_RedCap}$, $T_{measure,NR_Intra_RedCap}$ and $T_{evaluate,NR_Intrma_RedCap}$ as defined in Table 4.2B.2.3.

4.2B.2.10 Measurements of inter-frequency NR cells for UE configured with relaxed measurement criterion

4.2B.2.10.1 Introduction

This clause contains the requirements for measurements on inter-frequency NR cells when Srxlev $\leq S_{nonIntraSearchP}$ or Squal $\leq S_{nonIntraSearchQ}$ and when the UE is configured any of the following relaxed measurement critera:

- Relaxed measurement criterion for a stationary UE defined in clause 5.2.4.9.3 in [1],
- Relaxed measurement criterion for a stationary UE not at cell edge defined in clause 5.2.4.9.4 in [1],
- Both low mobility criterion and stationary criterion as defined in clause 5.2.4.9.1 and 5.2.4.9.3 or 5.2.4.9.4 in [1] respectively.

The 1 Rx RedCap UE for the evaluation of one or more relaxed measurement criteria defined in clause 5.2.4.9 [1] applies:

- *s-SearchDeltaP-r16* as the signaled value of *s-SearchDeltaP-r16* [2] - 1 dB.
- *s-SearchDeltaP-Stationary-r17* as the signaled value of *s-SearchDeltaP-Stationary-r17* [2] - 1 dB.
- *s-SearchThresholdP-r16* as the signaled value of *s-SearchThresholdP-r16* [2] + 1 dB.
- *s-SearchThresholdQ-r16* as the signaled value of *s-SearchThresholdQ-r16* [2] + 1 dB.
- *s-SearchThresholdP2-r17* as the signaled value of *s-SearchThresholdP2-r17* [2] + 1 dB.
- s-SearchThresholdQ2-r17 as the signaled value of s-SearchThresholdQ2-r17 [2] + 1 dB.

4.2B.2.10.2 Measurements for UE fulfilling stationary criterion

This clause contains requirements for measurements on inter-frequency NR cells provided that:

- UE is configured with *stationaryMobilityEvaluation* [2] criterion and UE has fulfilled that criterion, or

- UE is configured with both *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluationWhileStationary* [2] criterion and *combineRelaxedMeasCondition2* [2] not configured, and UE has fulfilled only the *stationaryMobilityEvaluation* [2] criterion, and

The requirements defined in clause 4.2B.2.4 apply for this clause except that:

- $T_{detect,NR_Inter_RedCap_Relax}$ as specified in Table 4.2B.2.10.2-1 and Table 4.2B.2.10.2-2 for 1 Rx RedCap and 2 Rx RedCap respectively.

- $T_{measure,NR_Inter_RedCap_Relax}$ as specified in Table 4.2B.2.10.2-1 and Table 4.2B.2.10.2-2 for 1 Rx RedCap and 2 Rx RedCap respectively.

- $T_{evaluate,NR_Inter_RedCap_Relax}$ as specified in Table 4.2B.2.10.2-1 and Table 4.2B.2.10.2-2 for 1 Rx RedCap and 2 Rx RedCap respectively.

- When Srxlev > $S_{nonIntraSearchP}$ and Squal > $S_{nonIntraSearchQ}$ then the UE shall search for inter-frequency layers of higher priority at least every K2*$T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in clause 4.2.2.7 and, K2 = 240.

If the UE is configured with eDRX_IDLE cycle then the requirements in Table 4.2B.2.10.2-3 and Table 4.2B.2.10.2-4 are applicable for eDRX cycle up to 10.24 s in FR1 and FR2 respectively.

If the UE is configured with eDRX_IDLE cycle greater than 10.24 s in FR1 and FR2, then the requirements in Table Table 4.2B.2.10.2-5 and Table 4.2B.2.10.2-6 respectively apply provided that eDRX cycle is ≤ [163.84] sec and evaluation/measurement time with relaxation on one carrier is not greater than single PTW window length.

Table 4.2B.2.10.2-1: $T_{detect,NR_Inter_RedCap_Relax}$, $T_{measure,NR_Inter_RedCap_Relax}$ and $T_{evaluate,NR_Inter_RedCap_Relax}$ for 1 Rx RedCap UE

DRX cycle length [s]	$T_{detect,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{measure,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles)
0.32	11.52 x 1.5 x K4(36 x 1.5 x K4)	1.28 x 1.5 x K4 (4 x 1.5 x K4)	5.12 x 1.5 x K4 (16 x 1.5 x K4)
0.64	17.92 x K4 (28 x K4)	1.28x K4 (2 x K4)	5.12 x K4 (8 x K4)
1.28	32 x K4 (25 x K4)	1.28x K4 (1 x K4)	6.4 x K4 (5 x K4)
2.56	58.88 x K4 (23 x K4)	2.56 x K4 (1 x K4)	7.68 x K4 (3 x K4)
Note 1: K4 = 6 is the measurement relaxation factor applicable for UE fulfilling the *stationaryMobilityEvaluation* [2] criterion.			

Table 4.2B.2.10.2-2: $T_{detect,NR_Inter_RedCap_Relax}$, $T_{measure,NR_Inter_RedCap_Relax}$ and $T_{evaluate,NR_Inter_RedCap_Relax}$ for 2 Rx RedCap UE

DRX cycle length [s]	Scaling Factor (N1)		$T_{detect,NR_Inter_Relax}$ [s] (number of DRX cycles)	$T_{measure,NR_Inter_Relax}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Inter_Relax}$ [s] (number of DRX cycles)
	FR1	FR2[Note1]			
0.32	1	8	11.52 x N1 x 1.5 x K4 (36 x N1 x 1.5 x K4)	1.28 x N1 x 1.5 x K4 (4 x N1 x 1.5 x K4)	5.12 x N1 x 1.5 x K4 (16 x N1 x 1.5 x K4)
0.64		5	17.92x N1 x K4 (28 x N1 x K4)	1.28 x N1 x K4 (2 x N1 x K4)	5.12 x N1 x K4 (8 x N1 x K4)
1.28		4	32 x N1 x K4 (25 x N1 x K4)	1.28 x N1 x K4 (1 x N1 x K4)	6.4 x N1 x K4 (5 x N1 x K4)
2.56		3	58.88 x N1 x K4 (23 x N1 x K4)	2.56 x N1 x K4 (1 x N1 x K4)	7.68 x N1 x K4 (3 x N1 x K4)
Note 1: Applies for RedCap UE of all supporting power class. Note 2: K4 = 6 is the measurement relaxation factor applicable for UE fulfilling the *stationaryMobilityEvaluation* [2] criterion.					

Table 4.2B.2.10.2-3: $T_{detect,\ NR_Inter_RedCap_Relax}$, $T_{measure,NR_,NR_Inter_RedCap_Relax}$ and $T_{evaluate,\ NR_Inter_RedCap_Relax}$ for UE configured with eDRX_IDLE cycle (Frequency range FR1)

eDRX_IDLE cycle length [s]	$T_{detect,\ NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{measure,\ NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{evaluate,\ NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles)
2.56	58.88 x K3 (23 x K3)	2.56 x K3 (1 x K3)	5.12 x K3 (2 x K3)
5.12	117.76 x K3 (23 x K3)	5.12 x K3 (1 x K3)	10.24 x K3 (2 x K3)
10.24	235.52 x K3 (23 x K3)	10.24 x K3 (1 x K3)	20.48 x K3 (2 x K3)

Note 1: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1. If different SMTC periodicities are configured for different cells, the SMTC periodicity in this note is the one used by the cell being identified. During PSS/SSS detection, the periodicity of the SMTC configured for the intra-frequency carrier is assumed, and if the actual SSB transmission periodicity is greater than the SMTC configured for the intra-frequency carrier, longer $T_{detect,\ NR_intra}$ is expected.

Note 2: K3 = 6 is the measurement relaxation factor applicable for UE fulfilling the *stationaryMobilityEvaluation* [2] criterion.

Table 4.2B.2.10.2-4: $T_{detect,NR_Inter_RedCap_Relax}$, $T_{measure,NR_Inter_RedCap_Relax}$ and $T_{evaluate,NR_Inter_RedCap_Relax}$ for UE configured with eDRX_IDLE cycle (Frequency range FR2) for eDRX_IDLE cycle upto 10.24 s

eDRX_IDLE cycle length [s]	$T_{detect,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{measure,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles)
2.56	58.88 x N1 x K3 (23 x N1 x K3)	2.56 x N1 x K3 (1 x N1 x K3)	7.68 x N1 x K3 (3 x N1 x K3)
5.12	117.76 x N1 x K3 (23 x N1 x K3)	5.12 x N1 x K3 (1 x N1 x K3)	10.24 x N1 x K3 (2 x N1 x K3)
10.24	235.52 x N1 x K3 (23 x N1 x K3)	10.24 x N1 x K3 (1 x N1 x K3)	20.48 x N1 x K3 (2 x N1 x K3)

Note 1: K3 = 6 is the measurement relaxation factor applicable for UE fulfilling the *stationaryMobilityEvaluation* [2] criterion.

Table 4.2B.2.10.2-5: $T_{detect,NR_Inter_RedCap_Relax}$, $T_{measure,NR_\ Inter\ _RedCap_Relax}$ and $T_{evaluate,NR_\ Inter\ _RedCap_Relax}$ for UE configured with eDRX_IDLE cycle (Frequency range FR1) for eDRX_IDLE cycle larger than 10.24 s

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	$T_{detect,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)	$T_{measure,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)	$T_{evaluate,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)
20.48 ≤ eDRX_IDLE cycle length ≤[163.84]	0.32	≥[6.4] ([5])	$eDRX_cycle_length \times \left\lceil \frac{23}{PTW/DRX_cycle_length} \right\rceil$ x K3 (23 x K3)	0.32 x M2 x K3 (1 x M2 x K3)	0.64 x M2 x K3 (2 x M2 x K3)
	0.64	≥[12.8] ([10])		0.64 x K3 (1 x K3)	1.28 x K3 (2 x K3)
	1.28	≥[15.36] ([12])		1.28 x K3 (1 x K3)	2.56 x K3 (2 x K3)
	2.56	≥[30.72] ([4])		2.56 x K3 (1 x K3)	5.12 x K3 (2 x K3)

Note 1: The number of DRX cycles in this table is given for the DRX cycles within PTWs.
Note 2: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [34].
Note 3: The lower bound of PTW length is derived based on $\left\lceil \frac{T_{evaluate,NR_Inter_RedCap} * DRX_cycle}{1.28} \right\rceil * 1.28$.
Note 4: K3 = 6 is the measurement relaxation factor applicable for UE fulfilling the stationaryMobilityEvaluation [2] criterion.

Table 4.2B.2.10.2-6: $T_{detect,NR_Inter_RedCap_Relax}$, $T_{measure,NR_Inter_RedCap_Relax}$ and $T_{evaluate,NR_Inter_RedCap_Relax}$ for UE configured with eDRX_IDLE cycle (Frequency range FR2) for eDRX_IDLE cycle larger than 10.24 s

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	Scaling Factor (N1) Note1	$T_{detect,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)	$T_{measure,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)	$T_{evaluate,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)
20.48 ≤ eDRX_IDLE cycle length ≤[163.84]	0.32	≥30.72 (24)	8	K3 x $eDRX_cycle_length \times \left\lceil \frac{23 \times N1}{PTW/DRX_cycle_length} \right\rceil$ (23 x N1 x K3)	0.32 x N1 x K3 (1 x N1 x K3)	0.64 x N1 x K3 (2 x N1 x K3)
	0.64	≥38.4 (30)	5		0.64 x N1 x K3 (1 x N1 x K3)	1.28 x N1 x K3 (2 x N1 x K3)
	1.28	40.96 (32)	4		1.28 x N1 x K3 (1 x N1 x K3)	2.56 x N1 x K3 (2 x N1 x K3)
	2.56	40.96 (32)	3		20.48	40.96

Note 1: Applies for RedCap UE of all supporting FR2 power classes.
Note 2: The number of DRX cycles in this table is given for the DRX cycles within PTWs.
Note 3: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [34].
Note 4: The lower bound of PTW length is derived based on $\left\lceil \frac{T_{evaluate,NR_Inter_RedCap} * DRX_cycle}{1.28} \right\rceil * 1.28$.
Note 5: For DRX cycle length is 0.32s, 0.64s and 2.56s, K3 = 6 is the measurement relaxation factor applicable for UE fulfilling the stationaryMobilityEvaluation [2] criterion. For DRX cycle length is 1.28s, K3 = 4 is the measurement relaxation factor applicable for UE fulfilling the stationaryMobilityEvaluation [2] criterion.

4.2B.2.10.3 Measurements for a UE fulfilling stationary not at cell edge criterion

This clause contains requirements for measurements on inter-frequency NR cells provided that:

- UE is configured with both *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluationWhileStationary* [2] criterion, and
- has also fulfilled both criteria, and
- less than 4 hours have passed since measurements for cell reselection were last performed, and

In this case the UE is not required to meet $T_{detect,NR_Inter_RedCap}$, $T_{measure,NR_Inter_RedCap}$ and $T_{evaluate,NR_Inter_RedCap}$ as defined in clause 4.2B.2.4.

When $Srxlev \leq S_{nonIntraSearchP}$ or $Squal \leq S_{nonIntraSearchQ}$, the UE shall search for, measure and evaluate inter-frequency layers of higher, equal or lower priority at least every 4 hours.

When $Srxlev > S_{nonIntraSearchP}$ and $Squal > S_{nonIntraSearchQ}$, the UE shall search for inter-frequency layers of higher priority at least every $K2*T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in clause 4.2.2.7 and K2=240.

The requirments defined in this clause apply regardless of eDRX_IDLE configurations.

4.2B.2.10.3A Measurements for a UE fulfilling stationary and Rel-16 not at cell edge criterion

This clause contains requirements for measurements on inter-frequency NR cells provided that:

- UE is configured with both *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluation* [2] criterion, and has also fulfilled both criteria, or

- UE is configured with *cellEdgeEvaluation* [2] criterion and with both *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluationWhileStationary* [2] criterion and *combineRelaxedMeasCondition2* [2] not configured, and UE has fulfilled *cellEdgeEvaluation* and *stationaryMobilityEvaluation* [2] criteria

The requirements defined in clause 4.2B.2.4 apply for this clause except that:

- $T_{detect,NR_Inter_RedCap_Relax}$ as specified in Table 4.2B.2.10.2-1 and Table 4.2B.2.10.2-1 for 1 Rx RedCap and 2 Rx RedCap respectively.

- $T_{measure,NR_Inter_RedCap_Relax}$ as specified in Table 4.2B.2.10.2-1 and Table 4.2B.2.10.2-1 for 1 Rx RedCap and 2 Rx RedCap respectively.

- $T_{evaluate,NR_Inter_RedCap_Relax}$ as specified in Table 4.2B.2.10.2-1 and Table 4.2B.2.10.2-1 for 1 Rx RedCap and 2 Rx RedCap respectively.

If the UE is configured with eDRX_IDLE cycle then the requirements in Table 4.2B.2.10.2-3 and Table 4.2B.2.10.2-4 are applicable for eDRX cycle up to 10.24 s in FR1 and FR2 respectively.

If the UE is configured with eDRX_IDLE cycle greater than 10.24 s in FR1 and FR2, then the requirements in Table Table 4.2B.2.10.2-5 and Table 4.2B.2.10.2-6 respectively apply provided that eDRX cycle is $\leq$ [163.84] sec and evaluation/measurement time with relaxation on one carrier is not greater than single PTW window length.

4.2B.2.10.4 Measurements for a UE fulfilling low mobility and stationary criteria

This clause contains requirements for measurements on inter-frequency NR cells provided that:

- UE is configured with *lowMobilityEvaluation* [2] criterion and *stationaryMobilityEvaluation* [2] criterion, and has also fulfilled both criteria, or,

- UE is configured with *lowMobilityEvaluation* [2] criterion and with both *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluationWhileStationary* [2] criterion and *combineRelaxedMeasCondition2* [2] not configured, and UE has fulfilled *lowMobilityEvaluation* and *stationaryMobilityEvaluation* [2] criteria

The requirements defined in clause 4.2B.2.10.2 apply for this clause.

4.2B.2.10.5 Measurements for a UE fulfilling low mobility and stationary not at cell edge criteria

This clause contains requirements for measurements on intra-frequency NR cells provided that:

- UE is configured with *lowMobilityEvaluation* [2] criterion and UE has fulfilled this criterion, and

- UE is configured with *stationaryMobilityEvaluation* [2] and *cellEdgeEvaluationWhileStationary* [2] criterion, and UE has also fulfilled both criteria

The requirements defined in clause 4.2B.2.10.3 apply for this clause.

4.2B.2.10.6 Measurements for a UE fulfilling not-at-cell edge criterion and stationary not at cell edge criteria

This clause contains requirements for measurements on inter-frequency NR cells provided that:

- UE is configured with cellEdgeEvaluation [2] criterion and UE has fulfilled that criterion, and

- UE is configured with *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluationWhileStationary* [2] criterion, and has also fulfilled both criteria

The requirements defined in clause 4.2B.2.10.3 apply for this clause.

4.2B.2.10.7 Measurements for a UE fulfilling low mobility not-at-cell edge criterion and stationary not at cell edge criteria

This clause contains requirements for measurements on intra-frequency NR cells provided that:

- UE is configured with both *lowMobilityEvaluation* [2] criterion and *cellEdgeEvaluation* [2] criterion, and has fulfilled both criteria, and
- UE is configured with *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluationWhileStationary* [2] criterion, and has also fulfilled both criteria

The requirements defined in clause 4.2B.2.10.3 apply for this clause.

4.2B.2.10.8 Measurements for a UE fulfilling low mobility not-at-cell edge criterion and stationary criteria

This clause contains requirements for measurements on inter-frequency NR cells provided that:

- UE is configured with both *lowMobilityEvaluation* [2] criterion and *cellEdgeEvaluation* [2] criterion, and has fulfilled both criteria, and
- UE is configured with *stationaryMobilityEvaluation* [2] criterion and has also fulfilled that criterion, or UE is configured with both *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluationWhileStationary* [2] criterion and *combineRelaxedMeasCondition2* [2] not configured, and UE has fulfilled *stationaryMobilityEvaluation* [2] criterion.

The requirements defined in clause 4.2.2.10.4 apply for this clause.

4.2B.2.10.9 Measurements for UE fulfilling low mobility criterion

This clause contains requirements for measurements on inter-frequency NR cells provided that:

- UE is configured with *lowMobilityEvaluation* [2] criterion and UE has fulfilled, or
- UE is configured with both *lowMobilityEvaluation* [2] and *cellEdgeEvaluation* [2] criterion and *combineRelaxedMeasCondition* [2] not configured, and
- UE has fulfilled only the *lowMobilityEvaluation* [2] criterion.

When Srxlev $\leq S_{nonIntraSearchP}$ or Squal $\leq S_{nonIntraSearchQ}$ then the requirements are defined as follows:

- $T_{detect,NR_Inter_RedCap_Relax}$ as specified in Table 4.2B.2.10.9-1 and Table 4.2B.2.10.9-2 for 1 Rx RedCap and 2 Rx RedCap respectively.
- $T_{measure,NR_Inter\ RedCap\ Relax}$ as specified in Table 4.2B.2.10.9-1 and Table 4.2B.2.10.9-2 for 1 Rx RedCap and 2 Rx RedCap respectively.
- $T_{evaluate,NR_Inter_RedCap\ Relax}$ as specified in Table 4.2B.2.10.9-1 and Table 4.2B.2.10.9-2 for 1 Rx RedCap and 2 Rx RedCap respectively.

If the UE is configured with eDRX_IDLE cycle then the requirements in Table 4.2B.2.10.9-3 and Table 4.2B.2.10.9-4 are applicable for eDRX cycle up to 10.24 s in FR1 and FR2, respectively.

If the UE is configured with eDRX_IDLE cycle greater than 10.24 s in FR1 and FR2, then the requirements in Table Table 4.2B.2.10.9-5 and Table 4.2B.2.10.9-6 respectively apply provided eDRX cycle is $\leq$ [163.84] sec and evaluation/measurement time with relaxation on one carrier is not greater than single PTW window length.

When Srxlev > $S_{nonIntraSearchP}$ and Squal > $S_{nonIntraSearchQ}$ and the UE is configured with *highPriorityMeasRelax* [2] then the UE shall search for inter-frequency layers of higher priority at least every $K2*T_{higher_priority_search}$ where

$T_{higher_priority_search}$ is described in clause 4.2B.2.7 and, K2 = 60. Otherwise if the UE is not configured with *highPriorityMeasRelax* [2] then the UE shall search for inter-frequency layers of higher priority at least every $T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in clause 4.2B.2.7.

Table 4.2B.2.10.9-1: $T_{detect,NR_Inter_RedCap_Relax}$, $T_{measure,NR_Inter\ RedCap_Relax}$ and $T_{evaluate,NR_Inter\ RedCap_Relax}$ for UEs fulfilling low mobility criterion for 1 Rx RedCap UE

DRX cycle length [s]	$T_{detect,NR_Inter\ RedCap_Relax}$ [s] (number of DRX cycles)	$T_{measure,NR_Inter\ RedCap_Relax}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Inter\ RedCap_Relax}$ [s] (number of DRX cycles)
0.32	11.52 x M2 x K1 (36 x M2 x K1)	1.28 x M2 x K1 (4 x M2 x K1)	5.12 x M2 x K1 (16 x M2 x K1)
0.64	17.92 x K1 (28 x K1)	1.28 x K1 (2 x K1)	5.12 x K1 (8 x K1)
1.28	32 x K1 (25 x K1)	1.28 x K1 (1 x K1)	6.4 x K1 (5 x K1)
2.56	58.88 x K1 (23 x K1)	2.56 x K1 (1 x K1)	7.68 x K1 (3 x K1)

Note 1: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1.
Note 2: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the *lowMobilityEvaluation* [2] criterion.

Table 4.2B.2.10.9-2: $T_{detect,NR_Inter_RedCap_Relax}$, $T_{measure,NR_Inter\ RedCap_Relax}$ and $T_{evaluate,NR_Inter\ RedCap_Relax}$ for UEs fulfilling low mobility criterion for 2 Rx RedCap UE

DRX cycle length [s]	Scaling Factor (N1)		$T_{detect,NR_Inter\ RedCap_Relax}$ [s] (number of DRX cycles)	$T_{measure,NR_Inter\ RedCap_Relax}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Inter\ RedCap_Relax}$ [s] (number of DRX cycles)
	FR1	FR2[Note1]			
0.32	1	8	11.52 x N1 x M2 x K1 (36 x N1 x M2 x K1)	1.28 x N1 x M2 x K1 (4 x N1 x M2 x K1)	5.12 x N1 x M2 x K1 (16 x N1 x M2 x K1)
0.64		5	17.92 x N1 x K1 (28 x N1 x K1)	1.28 x N1 x K1 (2 x N1 x K1)	5.12 x N1 x K1 (8 x N1 x K1)
1.28		4	32 x N1 x K1 (25 x N1 x K1)	1.28 x N1 x K1 (1 x N1 x K1)	6.4 x N1 x K1 (5 x N1 x K1)
2.56		3	58.88 x N1 x K1 (23 x N1 x K1)	2.56 x N1 x K1 (1 x N1 x K1)	7.68 x N1 x K1 (3 x N1 x K1)

Note 1: Applies for RedCap UE of all supporting FR2 power classes.
Note 2: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1.
Note 3: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the *lowMobilityEvaluation* [2] criterion.

Table 4.2B.2.10.9-3: $T_{detect,NR_Inter_RedCap_Relax}$, $T_{measure,NR_Inter_RedCap_Relax}$ and $T_{evaluate,NR_Inter_RedCap_Relax}$ for UE configured with eDRX_IDLE cycle (Frequency range FR1) for eDRX_IDLE cycle upto 10.24 s

eDRX_IDLE cycle length [s]	$T_{detect,NR_Inter_RedCap_Relax}$ [s] (number of eDRX IDLE cycles)	$T_{measure,NR_Inter_RedCap_Relax}$ [s] (number of eDRX IDLE cycles)	$T_{evaluate,NR_Inter_RedCap_Relax}$ [s] (number of eDRX IDLE cycles)
2.56	58.88 x K1 (23 x K1)	2.56 x K1 (1 x K1)	7.68 x K1 (3 x K1)
5.12	117.76 x K1 (23 x K1)	5.12 x K1 (1 x K1)	10.24 x K1 (2 x K1)
10.24	235.52 x K1 (23 x K1)	10.24 x K1 (1 x K1)	20.48 x K1 (2 x K1)

Note 1: Applies for RedCap UE of all supporting FR2 power classes.
Note 2: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the *lowMobilityEvaluation* [2] criterion.

Table 4.2B.2.10.9-4: $T_{detect,NR_Inter_RedCap_Relax}$, $T_{measure,NR_Inter_RedCap_Relax}$ and $T_{evaluate,NR_Inter_RedCap_Relax}$ for UE configured with eDRX_IDLE cycle (Frequency range FR2) for eDRX_IDLE cycle upto 10.24 s for 2 Rx RedCap UE

eDRX_IDLE cycle length [s]	$T_{detect,NR_Inter_RedCap_Relax}$ [s] (number of eDRX IDLE cycles)	$T_{measure,NR_Inter_RedCap_Relax}$ [s] (number of eDRX IDLE cycles)	$T_{evaluate,NR_Inter_RedCap_Relax}$ [s] (number of eDRX IDLE cycles)

2.56	58.88 x N1 x K1 (23 x N1 x K1)	2.56 x N1 x K1 (1 x N1 x K1)	7.68 x N1 x K1 (3 x N1 x K1)
5.12	117.76 x N1 x K1 (23 x N1 x K1)	5.12 x N1 x K1 (1 x N1 x K1)	10.24 x N1 x K1 (2 x N1 x K1)
10.24	235.52 x N1 x K1 (23 x N1 x K1)	10.24 x N1 x K1 (1 x N1 x K1)	20.48 x N1 x K1 (2 x N1 x K1)
Note 1: Applies for RedCap UE of all supporting FR2 power classes. Note 2: N1 = 3. Note 3: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the *lowMobilityEvaluation* [2] criterion.			

Table 4.2B.2.10.9-5: $T_{detect,NR_Inter_RedCap_Relax}$, $T_{measure,NR_Inter_RedCap_elax}$ and $T_{evaluate,NR_Inter_RedCap_Relax}$ for UE configured with eDRX_IDLE cycle (Frequency range FR1)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	$T_{detect,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)	$T_{measure,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)	$T_{evaluate,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)
20.48 ≤ eDRX_IDLE cycle length ≤[163.84]	0.32	≥[3.84] ([3])	$eDRX_cycle_length \times \left\lceil \frac{23}{PTW/DRX_cycle_length} \right\rceil$ x K (23 x K1)	0.32 x 1.5 x K1 (1 x M2 x K1)	0.64 x 1.5 x K1 (2 x M2 x K1)
	0.64	≥[3.84] ([3])		0.64 x K1 (1 x K1)	1.28 x K1 (2 x K1)
	1.28	≥[7.68] ([6])		1.28 x K1 (1 x K1)	2.56 x K1 (2 x K1)
	2.56	≥[15.36] ([12])		2.56 x K1 (1 x K1)	5.12 x K1 (2 x K1)
Note 1: The number of DRX cycles in this table is given for the DRX cycles within PTWs. Note 2: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [34]. Note 3: The lower bound of PTW length is derived based on $\left\lceil \frac{Tevaluate,NR_Intra_RedCap * DRX_cycle}{1.28} \right\rceil * 1.28$. Note 4: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the *lowMobilityEvaluation* [2] criterion.					

Table 4.2B.2.10.9-6: $T_{detect,NR_Inter_RedCap_Relax}$, $T_{measure,NR_Inter_RedCap_Relax}$ and $T_{evaluate,NR_Inter_RedCap_Relax}$ for UE configured with eDRX_IDLE cycle (Frequency range FR2)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	Scaling Factor (N1) Note1	$T_{detect,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)	$T_{measure,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)	$T_{evaluate,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)
20.48 ≤ eDRX_IDLE cycle length ≤[163.84]	0.32	≥15.36 (12)	8	K1 x $eDRX_cycle_length \times \left\lceil \frac{23 \times N1}{PTW/DRX_cycle_length} \right\rceil$ (23 x N1 x K1)	0.32 x N1 x K1 (1 x N1 x K1)	0.64 x N1 x K1 (2 x N1 x K1)
	0.64	≥19.2 (15)	5		0.64 x N1 x K1 (1 x N1 x K1)	1.28 x N1 x K1 (2 x N1 x K1)
	1.28	≥30.72 (24)	4		1.28 x N1 x K1 (1 x N1 x K1)	2.56 x N1 x K1 (2 x N1 x K1)
	2.56	40.96 (32)	3		20.48	40.96
Note 1: Applies for RedCap UE of all supporting FR2 power classes. Note 2: The number of DRX cycles in this table is given for the DRX cycles within PTWs. Note 3: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [34].						

Note 4: The lower bound of PTW length is derived based on $\left\lceil \frac{Tevaluate,NR_Intra_RedCap*DRX_cycle}{1.28} \right\rceil * 1.28$.
Note 5: The measurement shall not be performed across PTW's. In this case the measurement is performed in the next available PTW.
Note 6: The evaluation shall not be performed across PTW's.
Note 7: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the *lowMobilityEvaluation criterion* [2].

4.2B.2.10.10 Measurements for UE fulfilling not-at-cell edge criterion

This clause contains requirements for measurements on inter-frequency NR cells provided that:

- UE is configured with *cellEdgeEvaluation* [2] criterion, and UE has fulfilled or
- UE is configured with both *lowMobilityEvaluation* [2] criterion and *cellEdgeEvaluation* [2] criterion and *combineRelaxedMeasCondition* [2] not configured, and
- UE has fulfilled only the *cellEdgeEvaluation* [2] criterion.

When Srxlev ≤ $S_{nonIntraSearchP}$ or Squal ≤ $S_{nonIntraSearchQ}$ then the requirements defined in clause 4.2B.2.4 apply for this clause except that:

- $T_{detect,NR_Inter\ RedCap\ Relax}$ as specified in Table 4.2B.2.10.10-1 and Table 4.2B.2.10.10-2 for 1 Rx RedCap and 2 Rx RedCap respectively.
- $T_{measure,NR_Inter_RedCap\ Relax}$ as specified in Table 4.2B.2.10.10-1 and Table 4.2B.2.10.10-2 for 1 Rx RedCap and 2 Rx RedCap respectively.
- $T_{evaluate,NR_Inter_RedCap\ Relax}$ as specified in Table 4.2B.2.10.10-1 and Table 4.2B.2.10.10-2 for 1 Rx RedCap and 2 Rx RedCap respectively.

If the UE is configured with eDRX_IDLE cycle then the requirements in Table 4.2B.2.10.10-3 and Table 4.2B.2.10.10-4 are applicable for eDRX cycle up to 10.24 s in FR1 and FR2, respectively.

If the UE is configured with eDRX_IDLE cycle greater than 10.24 s in FR1 and FR2, then the requirements in Table Table 4.2B.2.10.10-5 and Table 4.2B.2.10.10-6 respectively apply provided eDRX cycle is ≤ [163.84] sec and evaluation/measurement time with relaxation on one carrier is not greater than single PTW window length.

When Srxlev > SnonIntraSearchP and Squal > SnonIntraSearchQ and regardless of whether the UE is configured with *highPriorityMeasRelax* [2] or not, the UE shall search for inter-frequency layers of higher priority at least every $T_{higher_priority}$_search where $T_{higher_priority_search}$ is described in clause 4.2B.2.7

Table 4.2B.2.10.10-1: $T_{detect,NR_Inter_RedCap_Relax}$, $T_{measure,NR_Inter\ RedCap_Relax}$ and $T_{evaluate,NR_Inter\ RedCap_Relax}$ for UEs fulfilling low mobility criterion for 1 Rx RedCap UE

DRX cycle length [s]	$T_{detect,NR_Inter\ RedCap_Relax}$ [s] (number of DRX cycles)	$T_{measure,NR_Inter\ RedCap_Relax}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Inter\ RedCap_Relax}$ [s] (number of DRX cycles)
0.32	11.52 x 1.5 x K1 (36 x 1.5 x K1)	1.28 x 1.5 x K1 (4 x 1.5 x K1)	5.12 x 1.5 x K1 (16 x 1.5 x K1)
0.64	17.92 x K1 (28 x K1)	1.28 x K1 (2 x K1)	5.12 x K1 (8 x K1)
1.28	32 x K1 (25 x K1)	1.28 x K1 (1 x K1)	6.4 x K1 (5 x K1)
2.56	58.88 x K1 (23 x K1)	2.56 x K1 (1 x K1)	7.68 x K1 (3 x K1)
Note 1: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the *cellEdgeEvaluation* [2] criterion.			

Table 4.2B.2.10.10-2: $T_{detect,NR_Inter_RedCap_Relax}$, $T_{measure,NR_Inter\ RedCap_Relax}$ and $T_{evaluate,NR_Inter\ RedCap_Relax}$ for UEs fulfilling low mobility criterion for 2 Rx RedCap UE

DRX cycle length [s]	Scaling Factor (N1)			$T_{evaluate,NR_Inter\ RedCap_Relax}$

	FR1	FR2[Note1]	$T_{detect,NR_Inter\ RedCap_Relax}$ [s] (number of DRX cycles)	$T_{measure,NR_Inter\ RedCap_Relax}$ [s] (number of DRX cycles)	[s] (number of DRX cycles)
0.32	1	8	11.52 x N1 x 1.5 x K1 (36 x N1 x 1.5 x K1)	1.28 x N1 x 1.5 x K1 (4 x N1 x 1.5 x K1)	5.12 x N1 x 1.5 x K1 (16 x N1 x 1.5 x K1)
0.64		5	17.92 x N1 x K1 (28 x N1 x K1)	1.28 x N1 x K1 (2 x N1 x K1)	5.12 x N1 x K1 (8 x N1 x K1)
1.28		4	32 x N1 x K1 (25 x N1 x K1)	1.28 x N1 x K1 (1 x N1 x K1)	6.4 x N1 x K1 (5 x N1 x K1)
2.56		3	58.88 x N1 x K1 (23 x N1 x K1)	2.56 x N1 x K1 (1 x N1 x K1)	7.68 x N1 x K1 (3 x N1 x K1)
Note 1: Applies for RedCap UE of all supporting FR2 power classes. Note 2: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the *cellEdgeEvaluation* [2] criterion.					

Table 4.2B.2.10.10-3: $T_{detect,NR_Inter_RedCap_Relax}$, $T_{measure,NR_Inter_RedCap_Relax}$ and $T_{evaluate,NR_Inter_RedCap_Relax}$ for UE configured with eDRX_IDLE cycle (Frequency range FR1) for eDRX_IDLE cycle upto 10.24 s

DRX_IDLE cycle length [s]	$T_{detect,NR_Inter_RedCap_Relax}$ [s] (number of eDRX IDLE cycles)	$T_{measure,NR_Inter_RedCap_Relax}$ [s] (number of eDRX IDLE cycles)	$T_{evaluate,NR_Inter_RedCap_Relax}$ [s] (number of eDRX IDLE cycles)
2.56	58.88 x K1 (23 x K1)	2.56 x K1 (1 x K1)	7.68 x N1 x K1 (3 x N1 x K1)
5.12	117.76 x K1 (23 x K1)	5.12 x K1 (1 x K1)	10.24 x N1 x K1 (2 x N1 x K1)
10.24	235.52 x K1 (23 x K1)	10.24 x K1 (1 x K1)	20.48 x N1 x K1 (2 x N1 x K1)
Note 1: Applies for RedCap UE of all supporting FR2 power classes. Note 2: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the *cellEdgeEvaluation* [2] criterion.			

Table 4.2B.2.10.10-4: $T_{detect,NR_Inter_RedCap_Relax}$, $T_{measure,NR_Inter_RedCap_Relax}$ and $T_{evaluate,NR_Inter_RedCap_Relax}$ for UE configured with eDRX_IDLE cycle (Frequency range FR2) for eDRX_IDLE cycle upto 10.24 s for 1 Rx and 2 Rx RedCap UE

DRX_IDLE cycle length [s]	$T_{detect,NR_Inter_RedCap_Relax}$ [s] (number of eDRX IDLE cycles)	$T_{measure,NR_Inter_RedCap_Relax}$ [s] (number of eDRX IDLE cycles)	$T_{evaluate,NR_Inter_RedCap_Relax}$ [s] (number of eDRX IDLE cycles)
2.56	58.88 x N1 x K1 (23 x N1 x K1)	2.56 x N1 x K1 (1 x N1 x K1)	7.68 x N1 x K1 (3 x N1 x K1)
5.12	117.76 x N1 x K1 (23 x N1 x K1)	5.12 x N1 x K1 (1 x N1 x K1)	10.24 x N1 x K1 (2 x N1 x K1)
10.24	235.52 x N1 x K1 (23 x N1 x K1)	10.24 x N1 x K1 (1 x N1 x K1)	20.48 x N1 x K1 (2 x N1 x K1)
Note 1: Applies for RedCap UE of all supporting FR2 power classes. Note 2: N1 = 3. Note 3: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the *cellEdgeEvaluation* [2] criterion.			

Table 4.2B.2.10.10-5: $T_{detect,NR_Inter_RedCap_Relax}$, $T_{measure,NR_Inter_RedCap_elax}$ and $T_{evaluate,NR_Inter_RedCap_Relax}$ for UE configured with eDRX_IDLE cycle (Frequency range FR1)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	$T_{detect,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles [Note 3])	$T_{measure,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles [Note 3])	$T_{evaluate,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles [Note 3])
20.48 ≤ eDRX_IDLE cycle length ≤[163.84]	0.32	≥[3.84] ([3])	$\frac{eDRX_cycle_length}{PTW/DRX_cycle_length} \times \left\lceil \frac{23}{} \right\rceil \times K$ (23 x K1)	0.32 x M2 x K1 (1 x M2 x K1)	0.64 x M2 x K1 (2 x M2 x K1)
	0.64	≥[3.84] ([3])		0.64 x K1 (1 x K1)	1.28 x K1 (2 x K1)

	1.28	≥[7.68] ([6])		1.28 x K1 (1 x K1)	2.56 x K1 (2 x K1)
	2.56	≥[15.36] ([12])		2.56 x K1 (1 x K1)	5.12 x K1 (2 x K1)

Note 1: The number of DRX cycles in this table is given for the DRX cycles within PTWs.
Note 2: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [34].
Note 3: The lower bound of PTW length is derived based on $\left\lceil \frac{Tevaluate,NR_Intra_RedCap * DRX_cycle}{1.28} \right\rceil * 1.28$.
Note 4: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1. If different SMTC periodicities are configured for different cells, the SMTC periodicity in this note is the one used by the cell being identified. During PSS/SSS detection, the periodicity of the SMTC configured for the intra-frequency carrier is assumed, and if the actual SSB transmission periodicity is greater than the SMTC configured for the intra-frequency carrier, longer $T_{detect, NR_intra_RedCap}$ is expected.
Note 5: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the *cellEdgeEvaluation* [2] criterion.

Table 4.2B.2.10.10-6: $T_{detect,NR_Inter_RedCap_Relax}$, $T_{measure,NR_Inter_RedCap_Relax}$ and $T_{evaluate,NR_Inter_RedCap_Relax}$ for UE configured with eDRX_IDLE cycle (Frequency range FR2)

eDRX_IDLE cycle length [s]	**DRX cycle length [s]**	**PTW length [s] (number of 1.28s periods)**	**Scaling Factor (N1)** Note1	**$T_{detect,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)**	**$T_{measure,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)**	**$T_{evaluate,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)**
20.48 ≤ eDRX_IDLE cycle length ≤[163.84]	0.32	≥15.36 (12)	8	$\mathrm{K1} \times eDRX_cycle_length \times \left\lceil \frac{23 \times N1}{PTW/DRX_cycle_length} \right\rceil$	0.32 x N1 x K1 (1 x N1 x K1)	0.64 x N1 x K1 (2 x N1 x K1)
	0.64	≥19.2 (15)	5	(23 x N1 x K1)	0.64 x N1 x K1 (1 x N1 x K1)	1.28 x N1 x K1 (2 x N1 x K1)
	1.28	≥30.72 (24)	4		1.28 x N1 x K1 (1 x N1 x K1)	2.56 x N1 x K1 (2 x N1 x K1)
	2.56	40.96 (32)	3		20.48	40.96

Note 1: Applies for RedCap UE of all supporting FR2 power classes.
Note 2: The number of DRX cycles in this table is given for the DRX cycles within PTWs.
Note 3: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [34].
Note 4: The lower bound of PTW length is derived based on $\left\lceil \frac{Tevaluate,NR_Intra_RedCap * DRX_cycle}{1.28} \right\rceil * 1.28$.
Note 5: The measurement shall not be performed across PTW's. In this case the measurement is performed in the next available PTW.
Note 6: The evaluation shall not be performed across PTW's.
Note 7: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the *cellEdgeEvaluation criterion* [2].

4.2B.2.10.11 Measurements for UE fulfilling low mobility and not-at-cell edge criterion

This clause contains requirements for measurements on inter-frequency NR cells provided that:

- UE is configured with both *lowMobilityEvaluation* [2] criterion and *cellEdgeEvaluation* [2] criterion, and
- Has also fulfilled both criteria, and
- less than 1 hour have passed since measurements for cell reselection were last performed

In this case the UE is not required to meet $T_{detect,NR_Inter_RedCap}$, $T_{measure,NR_Inter_RedCap}$ and $T_{evaluate,NR_Inter_RedCap}$ as defined in Table 4.2B.2.4.

4.2B.2.11 Measurements of inter-RAT E-UTRAN cells for UE configured with relaxed measurement criterion

4.2B.2.11.1 Introduction

This clause contains the requirements for measurements on inter-RAT E-UTRAN cells when Srxlev ≤ $S_{IntraSearchP}$ or Squal ≤ $S_{IntraSearchQ}$ and when the UE is configured any of the following relaxed measurement critera:

- Relaxed measurement criterion for a stationary UE defined in clause 5.2.4.9.X in [1],
- Relaxed measurement criterion for a stationary UE not at cell edge defined in clause 5.2.4.9.Y in [1],
- Both low mobility criterion and stationary criterion as defined in clause 5.2.4.9.1 and 5.2.4.9.X in [1] respectively.

The 1 Rx RedCap UE for the evaluation of one or more relaxed measurement criteria defined in clause 5.2.4.9 [1] applies:

- *s-SearchDeltaP-r16* as the signaled value of *s-SearchDeltaP-r16* [2] - 1 dB.
- *s-SearchDeltaP-Stationary-r17* as the signaled value of *s-SearchDeltaP-Stationary-r17* [2] - 1 dB.
- *s-SearchThresholdP-r16* as the signaled value of *s-SearchThresholdP-r16* [2] + 1 dB.
- *s-SearchThresholdQ-r16* as the signaled value of *s-SearchThresholdQ-r16* [2] + 1 dB.
- *s-SearchThresholdP2-r17* as the signaled value of *s-SearchThresholdP2-r17* [2] + 1 dB.
- s-SearchThresholdQ2-r17 as the signaled value of s-SearchThresholdQ2-r17 [2] + 1 dB.

4.2B.2.11.2 Measurements for UE fulfilling stationary criterion

This clause contains requirements for measurements on inter-RAT E-UTRAN cells provided that:

- UE is configured with *stationaryMobilityEvaluation* [2] criterion and UE has fulfilled that criterion, or
- UE is configured with both *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluationWhileStationary* [2] criterion and *combineRelaxedMeasCondition2* [2] not configured, and UE has fulfilled only the *stationaryMobilityEvaluation* [2] criterion, and

The requirements defined in clause 4.2B.2.5 apply for this clause except that:

- $T_{detect,EUTRAN_RedCap\ Relax}$ as specified in Table 4.2B.2.11.2-1 and Table 4.2B.2.11.2-2 for 1 Rx RedCap and 2 Rx RedCap respectively.
- $T_{measure,EUTRAN\ RedCap\ Relax}$ as specified in Table 4.2B.2.11.2-1 and Table 4.2B.2.11.2-2 for 1 Rx RedCap and 2 Rx RedCap respectively.
- $T_{evaluate,EUTRAN\ RedCap\ Relax}$ as specified in Table 4.2B.2.11.2-1 and Table 4.2B.2.11.2-2 for 1 Rx RedCap and 2 Rx RedCap respectively.

If the UE is configured with eDRX_IDLE cycle then the requirements in Table 4.2B.2.11.2-3 are applicable for eDRX cycle < 10.24 s.

If the UE is configured with eDRX_IDLE cycle ≥ 10.24 s, then the requirements in Table 4.2B.2.11.2-4 apply provided that filtering of a measurement is done within a single PTW and provided that the eDRX cycle is ≤ [163.84] sec and evaluation/measurement time with relaxation on one carrier is not greater than single PTW window length.

Table 4.2B.2.11.2-1: $T_{detect,EUTRAN_RedCap_Relax}$, $T_{measure,EUTRAN_RedCap_Relax}$, and $T_{evaluate,EUTRAN_RedCap_Relax}$ for 1 Rx RedCap

DRX cycle length [s]	$T_{detect,EUTRAN_Relax}$ [s] (number of DRX cycles)	$T_{measure,EUTRAN_Relax}$ [s] (number of DRX cycles)	$T_{evaluate,EUTRAN_Relax}$ [s] (number of DRX cycles)
0.32	11.52 x K5 (36 x K5)	1.28 x K5 (4 x K5)	5.12 x K5 (16 x K5)
0.64	17.92 x K5 (28 x K5)	1.28 x K5 (2 x K5)	5.12 x K5 (8 x K5)
1.28	32 x K5 (25 x K5)	1.28 x K5 (1 x K5)	6.4 x K5 (5 x K5)
2.56	58.88 x K5 (23 x K5)	2.56 x K5 (1 x K5)	7.68 x K5 (3 x K5)
Note 1: K5 = 6 is the measurement relaxation factor applicable for UE fulfilling the *stationaryMobilityEvaluation* [2] criterion.			

Table 4.2B.2.11.2-2: $T_{detect,EUTRAN_Relax}$, $T_{measure,EUTRAN_Relax}$, and $T_{evaluate,EUTRAN_Relax}$ for 2 Rx RedCap

DRX cycle length [s]	$T_{detect,EUTRAN_Relax}$ [s] (number of DRX cycles)	$T_{measure,EUTRAN_Relax}$ [s] (number of DRX cycles)	$T_{evaluate,EUTRAN_Relax}$ [s] (number of DRX cycles)
0.32	11.52 x K5 (36 x K5)	1.28 x K5 (4 x K5)	5.12 x K5 (16 x K5)
0.64	17.92 x K5 (28 x K5)	1.28 x K5 (2 x K5)	5.12 x K5 (8 x K5)
1.28	32 x K5 (25 x K5)	1.28 x K5 (1 x K5)	6.4 x K5 (5 x K5)
2.56	58.88 x K5 (23 x K5)	2.56 x K5 (1 x K5)	7.68 x K5 (3 x K5)
Note 1: K5 = 6 is the measurement relaxation factor applicable for UE fulfilling the *stationaryMobilityEvaluation* [2] criterion.			

Table 4.2B.2.11.2-3: $T_{detect,E\text{-}UTRAN_RedCap_Relax}$, $T_{measure,NR_,E\text{-}UTRAN_RedCap_Relax}$ and $T_{evaluate,NR_,E\text{-}UTRAN_RedCap_Relax}$ for UE configured with eDRX_IDLE cycle

eDRX_IDLE cycle length [s]	$T_{detect,NR_E\text{-}UTRAN_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{measure,NR_E\text{-}UTRAN_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{evaluate,NR_E\text{-}UTRAN_RedCap_Relax}$ [s] (number of DRX cycles)
5.12	117.76 x K3 (23 x K3)	5.12 x K3 (1 x K3)	10.24 x K3 (2 x K3)
Note 1: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1. If different SMTC periodicities are configured for different cells, the SMTC periodicity in this note is the one used by the cell being identified. During PSS/SSS detection, the periodicity of the SMTC configured for the intra-frequency carrier is assumed, and if the actual SSB transmission periodicity is greater than the SMTC configured for the intra-frequency carrier, longer $T_{detect,\ NR_intra}$ is expected. Note 2: K3 = 6 is the measurement relaxation factor applicable for UE fulfilling the *stationaryMobilityEvaluation* [2] criterion.			

Table 4.2B.2.11.2-4: $T_{detect,E\text{-}UTRAN_RedCap_Relax}$, $T_{measure,NR_,E\text{-}UTRAN_RedCap_Relax}$ and $T_{evaluate,NR_,E\text{-}UTRAN_RedCap_Relax}$ for UE configured with eDRX_IDLE cycle

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	$T_{detect,EUTRAN_RedCap_Relax}$ [s] (number of DRX or eDRX cycles Note 3)	$T_{measure,EUTRAN_RedCap_Relax}$ [s] (number of DRX or eDRX cycles Note 3)	$T_{evaluate,E\text{-}UTRAN_RedCap_Relax}$ [s] (number of DRX or eDRX cycles Note 3)
10.24 ≤ eDRX_IDLE cycle length ≤ 2621.444	0.32	≥1.28 (1)	$eDRX_cycle_length \times \left\lceil \frac{\text{K3 x } 23}{\lceil PTW / DRX_cycle_length \rceil} \right\rceil$ (23 x K3)	0.32 x K3 (1 x K3)	0.64 x K3 (2 x K3)
	0.64	≥1.28 (1)		0.64 x K3 (1 x K3)	1.28 x K3 (2 x K3)
	1.28	≥2.56 (2)		1.28 x K3 (1 x K3)	2.56 x K3 (2 x K3)

	2.56	≥5.12 (4)		2.56 x K3 (1 x K3)	5.12 x K3 (2 x K3)
NOTE 1: The number of DRX cycles in this table is given for the DRX cycles within PTWs. NOTE 2: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [34]. NOTE 3: Number of eDRX cycles when eDRX_IDLE cycle length equals 5.12s, number of DRX cycles otherwise. NOTE 4: The lower bound of PTW length is derived based on $\left\lceil \frac{T_{evaluate,E-UTRAN_RedCap} * DRX_cycle}{1.28} \right\rceil * 1.28$. NOTE 5: K3 = 6 is the measurement relaxation factor applicable for UE fulfilling the *stationaryMobilityEvaluation* [2] criterion.					

4.2B.2.11.3 Measurements for a UE fulfilling stationary not at cell edge criterion

This clause contains requirements for measurements on inter-RAT E-UTRAN cells provided that:

- UE is configured with both *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluationWhileStationary* [2] criterion, and
- has also fulfilled both criteria, and
- less than 4 hours have passed since measurements for cell reselection were last performed, and

In this case the UE is not required to meet $T_{detect,EUTRAN}$, $T_{measure,EUTRAN}$ and $T_{evaluate,EUTRAN}$ as defined in clause 4.2B.2.5.

In addition the the conditions listed above, if the UE is configured with eDRX_IDLE cycle ≤ [163.84] sec then the UE is not required to meet $T_{detect,NR_Intra_RedCap}$, $T_{measure,NR_Intra_RedCap}$ and $T_{evaluate,NR_Intra_RedCap}$ as defined in clause 4.2B.2.5 and evaluation/measurement time with relaxation on one carrier is not greater than single PTW window length.

4.2B.2.11.3A Measurements for a UE fulfilling stationary and Rel-16 not at cell edge criterion

This clause contains requirements for measurements on inter-RAT E-UTRAN cells provided that:

- UE is configured with both *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluation* [2] criterion, and has also fulfilled both criteria, or
- UE is configured with *cellEdgeEvaluation* [2] criterion and with both *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluationWhileStationary* [2] criterion and *combineRelaxedMeasCondition2* [2] not configured, and UE has fulfilled *cellEdgeEvaluation* and *stationaryMobilityEvaluation* [2] criterion.

The requirements defined in clause 4.2B.2.5 apply for this clause except that:

- $T_{detect,EUTRAN_Relax}$ as specified in Table 4.2B.2.11.2-1 and Table 4.2B.2.11.2-2 for 1 Rx RedCap and 2 Rx RedCap respectively.
- $T_{measure,EUTRAN_Relax}$ as specified in Table 4.2B.2.11.2-1 and Table 4.2B.2.11.2-2 for 1 Rx RedCap and 2 Rx RedCap respectively.
- $T_{evaluate,EUTRAN_Relax}$ as specified in Table 4.2B.2.11.2-1 and Table 4.2B.2.11.2-2 for 1 Rx RedCap and 2 Rx RedCap respectively.

If the UE is configured with eDRX_IDLE cycle then the requirements in Table 4.2B.2.11.2-3 are applicable for eDRX cycle < 10.24 s.

If the UE is configured with eDRX_IDLE cycle ≥ 10.24 s, then the requirements in Table 4.2B.2.11.2-4 apply provided that filtering of a measurement is done within a single PTW and provided that the eDRX cycle is ≤ [163.84] sec and evaluation/measurement time with relaxation on one carrier is not greater than single PTW window length.

4.2B.2.11.4 Measurements for a UE fulfilling low mobility and stationary criteria

This clause contains requirements for measurements on inter-RAT E-UTRAN cells provided that:

- UE is configured with *lowMobilityEvaluation* [2] criterion and *stationaryMobilityEvaluation* [2] criterion, and has also fulfilled both criteria, or,

- UE is configured with *lowMobilityEvaluation* [2] criterion and with both *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluationWhileStationary* [2] criterion and *combineRelaxedMeasCondition2* [2] not configured, and UE has fulfilled *lowMobilityEvaluation* and *stationaryMobilityEvaluation* [2] criteria

The requirements defined in clause 4.2B.2.11.2 apply for this clause.

4.2B.2.11.5 Measurements for a UE fulfilling low mobility and stationary not at cell edge criteria

This clause contains requirements for measurements on inter-RAT E-UTRAN cells provided that:

- UE is configured with *lowMobilityEvaluation* [2] criterion and UE has fulfilled this criterion, and

- UE is configured with *stationaryMobilityEvaluation* [2] and *cellEdgeEvaluationWhileStationary* [2] criterion, and UE has also fulfilled both criteria

The requirements defined in clause 4.2B.2.11.3 apply for this clause.

4.2B.2.11.6 Measurements for a UE fulfilling not-at-cell edge criterion and stationary not at cell edge criteria

This clause contains requirements for measurements on inter-RAT E-UTRAN cells provided that:

- UE is configured with cellEdgeEvaluation [2] criterion and UE has fulfilled that criterion, and

- UE is configured with *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluationWhileStationary* [2] criterion, and has also fulfilled both criteria

The requirements defined in clause 4.2B.2.11.3 apply for this clause.

4.2B.2.11.7 Measurements for a UE fulfilling low mobility not-at-cell edge criterion and stationary not at cell edge criteria

This clause contains requirements for measurements on inter-RAT E-UTRAN cells provided that:

- UE is configured with both *lowMobilityEvaluation* [2] criterion and *cellEdgeEvaluation* [2] criterion, and has fulfilled both criteria, and

- UE is configured with *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluationWhileStationary* [2] criterion, and has also fulfilled both criteria

The requirements defined in clause 4.2B.2.11.3 apply for this clause.

4.2B.2.11.8 Measurements for a UE fulfilling low mobility not-at-cell edge criterion and stationary criteria

This clause contains requirements for measurements on inter-RAT E-UTRAN cells provided that:

- UE is configured with both *lowMobilityEvaluation* [2] criterion and *cellEdgeEvaluation* [2] criterion, and has fulfilled both criteria, and

- UE is configured with *stationaryMobilityEvaluation* [2] criterion and has also fulfilled that criterion, or UE is configured with both *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluationWhileStationary* [2]

criterion and *combineRelaxedMeasCondition2* [2] not configured, and UE has fulfilled *stationaryMobilityEvaluation* [2] criteria.

The requirements defined in clause 4.2.2.11.4 apply for this clause.

4.2B.2.11.9 Measurements for UE fulfilling low mobility criterion

This clause contains requirements for measurements on inter-RAT E-UTRAN cells provided that:

- UE is configured with *lowMobilityEvalutation* [2] criterion and UE has fulfilled, or
- UE is configured with both *lowMobilityEvalutation* [2] criterion and *cellEdgeEvaluation* [2] criterion and *combineRelaxedMeasCondition* [2] not configured, and
- UE has fulfilled only the *lowMobilityEvalutation* [2] criterion.

When Srxlev ≤ $S_{nonIntraSearchP}$ and Squal ≤ $S_{nonIntraSearchQ}$ then the requirements defined in clause 4.2B.2.5 apply for this clause except that:

- $T_{detect,EUTRAN_RedCap_Relax}$ as specified in Table 4.2B.2.11.9-1.
- $T_{measure,EUTRAN_RedCap_Relax}$ as specified in Table 4.2B.2.11.9-1.
- $T_{evaluate,EUTRAN_RedCap_Relax}$ as specified in Table 4.2B.2.11.9-1.

If the UE is configured with eDRX_IDLE cycle then the requirements in Table 4.2B.2.11.9-2 are applicable for eDRX cycle < 10.24 s for 1 Rx and 2 Rx RedCap UE.
If the UE is configured with eDRX_IDLE cycle ≥ 10.24 s, then the requirements in Table 4.2B.2.11.9-3, for 1 Rx and 2 Rx RedCap UE, apply provided that filtering of a measurement is done within a single PTW and provided that the eDRX cycle is ≤ [163.84] sec and evaluation/measurement time with relaxation on one carrier is not greater than single PTW window length.

When Srxlev > $S_{nonIntraSearchP}$ and Squal > $S_{nonIntraSearchQ}$ and the UE is configured with *highPriorityMeasRelax* [2] then the UE shall search for E-UTRA inter-RAT frequency layers of higher priority at least every K2*$T_{higher_priority_search}$ seconds where $T_{higher_priority_search}$ is described in clause 4.2B.2.7 and, K2 = 60. Otherwise, if the UE is not configured with *highPriorityMeasRelax* [2] then the UE shall search for E-UTRA inter-RAT frequency layers of higher priority at least every $T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in clause 4.2B.2.7.

Table 4.2B.2.11.9-1: $T_{detect,EUTRAN_RedCap_Relax}$, $T_{measure,EUTRAN_RedCap_Relax}$, and $T_{evaluate,EUTRAN_RedCap_Relax}$ for 1 Rx and 2 Rx RedCap UE

DRX cycle length [s]	$T_{detect,EUTRAN_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{measure,EUTRAN_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{evaluate,EUTRAN_RedCap_Relax}$ [s] (number of DRX cycles)
0.32	11.52 x K1 (36 x K1)	1.28 x K1 (4 x K1)	5.12 x K1 (16 x K1)
0.64	17.92 x K1 (28 x K1)	1.28 x K1 (2 x K1)	5.12 x K1 (8 x K1)
1.28	32 x K1 (25 x K1)	1.28 x K1 (1 x K1)	6.4 x K1 (5 x K1)
2.56	58.88 x K1 (23 x K1)	2.56 (1 x K1)	7.68 x K1 (3 x K1)
Note 1: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the *lowMobilityEvalutation* [2] criterion.			

Table 4.2B.2.11.9-2: $T_{detect,EUTRAN_Relax}$, $T_{measure,\ EUTRAN_RedCap_Relax}$ and $T_{evaluate,\ EUTRAN_RedCap_Relax}$ for UE configured with eDRX_IDLE cycle (Frequency range FR1) for eDRX_IDLE cycle upto 10.24 s

eDRX_IDLE cycle length [s]	$T_{detect,\ EUTRAN_RedCap_Relax}$ [s] (number of eDRX IDLE cycles)	$T_{measure,\ EUTRAN_RedCap_Relax}$ [s] (number of eDRX IDLE cycles)	$T_{evaluate,\ EUTRAN_RedCap_Relax}$ [s] (number of eDRX IDLE cycles)
5.12	117.76 x K1 (23 x K1)	5.12 x K1 (1 x K1)	10.24 x K1 (2 x K1)
10.24	235.52 x K1 (23 x K1)	10.24 x K1 (1 x K1)	20.48 x K1 (2 x K1)
Note 1: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the *lowMobilityEvaluation* [2] criterion.			

Table 4.2B.2.11.9-3: $T_{detect, EUTRAN_RedCap_Relax}$, $T_{measure, EUTRAN_RedCap_elax}$ and $T_{evaluate, EUTRAN_RedCap_Relax}$ for UE configured with eDRX_IDLE cycle (Frequency range FR1)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	$T_{detect, EUTRAN_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)	$T_{measure,EUTRAN_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)	$T_{evaluate,EUTRAN_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)
20.48 ≤ eDRX_IDLE cycle length ≤[163.84]	0.32	≥[3.84] ([3])	$eDRX_cycle_length \times \left\lceil \frac{23}{PTW/DRX_cycle_length} \right\rceil$ x K (23 x K1)	0.32 x K1 (1 x K1)	0.64 x K1 (2 x K1)
	0.64	≥[3.84] ([3])		0.64 x K1 (1 x K1)	1.28 x K1 (2 x K1)
	1.28	≥[7.68] ([6])		1.28 x K1 (1 x K1)	2.56 x K1 (2 x K1)
	2.56	≥[15.36] ([12])		2.56 x K1 (1 x K1)	5.12 x K1 (2 x K1)

Note 1: The number of DRX cycles in this table is given for the DRX cycles within PTWs.
Note 2: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [34].
Note 3: The lower bound of PTW length is derived based on $\left\lceil \frac{Tevaluate,NR_Intra_RedCap * DRX_cycle}{1.28} \right\rceil * 1.28$.
Note 4: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the *lowMobilityEvaluation* [2] criterion.

4.2B.2.11.10 Measurements for UE fulfilling with not-at-cell edge criterion

This clause contains requirements for measurements on inter-RAT E-UTRAN cells provided that:

- UE is configured with *cellEdgeEvaluation* [2] criterion and UE has fulfilled, or
- UE is configured with both *lowMobilityEvalutation* [2] criterion and *cellEdgeEvaluation* [2] criterion and *combineRelaxedMeasCondition* [2] not configured, and
- UE has fulfilled only the *cellEdgeEvaluation* [2] criterion.

When Srxlev ≤ $S_{nonIntraSearchP}$ and Squal ≤ $S_{nonIntraSearchQ}$ then the requirements defined in clause 4.2B.2.5 apply for this clause except that:

- $T_{detect,EUTRAN_RedCap_Relax}$ as specified in Table 4.2B.2.11.10-1.
- $T_{measure,EUTRAN_RedCap_Relax}$ as specified in Table 4.2B.2.11.10-1.
- $T_{evaluate,EUTRAN_RedCap_Relax}$ as specified in Table 4.2B.2.11.10-1.

If the UE is configured with eDRX_IDLE cycle then the requirements in Table 4.2B.2.11.10-2 are applicable for eDRX cycle < 10.24 s for 1 Rx and 2 Rx RedCap UE.
If the UE is configured with eDRX_IDLE cycle ≥ 10.24 s, then the requirements in Table 4.2B.2.11.10-3, for 1 Rx and 2 Rx RedCap UE, apply provided that filtering of a measurement is done within a single PTW and provided that the eDRX cycle is ≤ [163.84] sec and evaluation/measurement time with relaxation on one carrier is not greater than single PTW window length.

When Srxlev > $S_{nonIntraSearchP}$ and Squal > $S_{nonIntraSearchQ}$ and regardless of whether the UE is configured with *highPriorityMeasRelax* [2] or not, the UE shall search for inter-RAT E-UTRAN frequency layers of higher priority at least every $T_{higher_priority_}$search where $T_{higher_priority_search}$ is described in clause 4.2B.2.7.

Table 4.2B.2.11.10-1: $T_{detect,EUTRAN_RedCap_Relax}$, $T_{measure,EUTRAN_RedCap_Relax}$, and $T_{evaluate,EUTRAN_RedCap_Relax}$ for 1 Rx and 2 Rx RedCap UE

DRX cycle length [s]	$T_{detect,EUTRAN_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{measure,EUTRAN_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{evaluate,EUTRAN_RedCap_Relax}$ [s] (number of DRX cycles)
0.32	11.52 x K1 (36 x K1)	1.28 x K1 (4 x K1)	5.12 x K1 (16 x K1)
0.64	17.92 x K1 (28 x K1)	1.28 x K1 (2 x K1)	5.12 x K1 (8 x K1)
1.28	32 x K1 (25 x K1)	1.28 x K1 (1 x K1)	6.4 x K1 (5 x K1)
2.56	58.88 x K1 (23 x K1)	2.56 x K1 (1 x K1)	7.68 x K1 (3 x K1)
Note 1: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the *cellEdgeEvaluation* [2] criterion.			

Table 4.2B.2.11.10-2: $T_{detect,\ EUTRAN_RedCap_Relax}$, $T_{measure,\ EUTRAN_RedCap_Relax}$ and $T_{evaluate,\ EUTRAN_RedCap_Relax}$ for UE configured with eDRX_IDLE cycle (Frequency range FR1) for eDRX_IDLE cycle upto 10.24 s

DRX_IDLE cycle length [s]	$T_{detect,\ EUTRAN_RedCap_Relax}$ [s] (number of eDRX IDLE cycles)	$T_{measure,\ EUTRAN_RedCap_Relax}$ [s] (number of eDRX IDLE cycles)	$T_{evaluate,\ EUTRAN_RedCap_Relax}$ [s] (number of eDRX IDLE cycles)
5.12	117.76 x K1 (23 x K1)	5.12 x K1 (1 x K1)	10.24 x K1 (2 x K1)
10.24	235.52 x K1 (23 x K1)	10.24 x K1 (1 x K1)	20.48 x K1 (2 x K1)
Note 1: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the *cellEdgeEvaluation* [2] criterion.			

Table 4.2B.2.11.10-3: $T_{detect,\ EUTRAN_RedCap_Relax}$, $T_{measure,\ EUTRAN_RedCap_elax}$ and $T_{evaluate,\ EUTRAN_RedCap_Relax}$ for UE configured with eDRX_IDLE cycle (Frequency range FR1)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	$T_{detect,\ EUTRAN_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)	$T_{measure,EUTRAN_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)	$T_{evaluate,EUTRAN_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)
20.48 ≤ eDRX_IDLE cycle length ≤[163.84]	0.32	≥[3.84] ([3])	$eDRX_cycle_length \times \left\lceil \frac{23}{PTW/DRX_cycle_length} \right\rceil$ x K (23 x K1)	0.32 x K1 (1 x M2 x K1)	0.64 x K1 (2 x M2 x K1)
	0.64	≥[3.84] ([3])		0.64 x K1 (1 x K1)	1.28 x K1 (2 x K1)
	1.28	≥[7.68] ([6])		1.28 x K1 (1 x K1)	2.56 x K1 (2 x K1)
	2.56	≥[15.36] ([12])		2.56 x K1 (1 x K1)	5.12 x K1 (2 x K1)
Note 1: The number of DRX cycles in this table is given for the DRX cycles within PTWs. Note 2: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [34]. Note 3: The lower bound of PTW length is derived based on $\left\lceil \frac{Tevaluate,NR_Intra_RedCap * DRX_cycle}{1.28} \right\rceil * 1.28$. Note 4: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the *cellEdgeEvaluation* [2] criterion.					

4.2B.2.11.11 Measurements for UE fulfilling low mobility and not-at-cell edge criterion

This clause contains requirements for measurements on inter-RAT E-UTRAN cells provided that:

- UE is configured with both *lowMobilityEvalutation* [2] criterion and *cellEdgeEvaluation* [2] criterion, and
- has also fulfilled both criteria, and
- less than 1 hour have passed since measurements for cell reselection were last performed,

In this case the UE is not required to meet $T_{detect,EUTRAN_RedCap}$, $T_{measure,EUTRAN_RedCap}$ and $T_{evaluate,EUTRAN_RedCap}$ as defined in Table 4.2B.2.5.

4.2C Cell Re-selection for NR UE for Satellite Access

4.2C.1 Introduction

The cell reselection procedure allows the UE to select a more suitable cell and camp on it.

When the UE is in either *Camped Normally* state or *Camped on Any Cell* state on a cell, the UE shall attempt to detect, synchronise, and monitor intra-frequency and inter-frequency cells indicated by the serving cell. For intra-frequency and inter-frequency cells the serving cell may not provide explicit neighbour list but carrier frequency information and bandwidth information only. UE measurement activity is also controlled by measurement rules defined in TS 38.304 [1], allowing the UE to limit its measurement activity.

4.2C.2 Requirements

4.2C.2.1 UE measurement capability

For idle mode cell re-selection purposes, the UE shall be capable of monitoring at least:

- Intra-frequency carrier, and
- Depending on UE capability, 7 NR inter-frequency carriers, and

4.2C.2.2 Measurement and evaluation of serving cell

The UE shall measure the SS-RSRP and SS-RSRQ level of the serving cell and evaluate the cell selection criterion S defined in TS 38.304 [1] for the serving cell at least once every M1*N1 DRX cycle; where:

- M1=2 if SMTC periodicity (T_{SMTC}) > 20 ms and DRX cycle ≤ 0.64 second and N_{SMTC} =1, upon one SMTC configured at the UE,
- M1=2.5 if SMTC periodicity (T_{SMTC}) > 20 ms and DRX cycle ≤ 0.64 secondand $1<N_{SMTC} \leq 4$,
- otherwise M1=1.

Where, N_{SMTC} is the number of SMTCs configured by SAN.

The UE shall filter the SS-RSRP and SS-RSRQ measurements of the serving cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by, at least DRX cycle/2.

If the UE has evaluated according to Table 4.2C.2.2-1 in N_{serv} consecutive DRX cycles that the serving cell does not fulfil the cell selection criterion S, the UE shall initiate the measurements of all neighbour cells indicated by the serving cell, regardless of the measurement rules currently limiting UE measurement activities. Additionally, if the UE is configured with '*t-service*' [2], the UE should start measurements of the neighbour cells indicated by the serving cell before '*t-service*' is reached according to the requirements provided in clause 4.2C.2.3 and 4.2C.2.4.

If the UE is not configured with'*t-Service*' [2] in the serving cell and if the UE in RRC_IDLE has not found any new suitable cell based on searches and measurements using the intra-frequency, inter-frequency and inter-RAT information indicated in the system information for 10 s, the UE shall initiate cell selection procedures for the selected PLMN as defined in TS 38.304 [1].

If the UE is configured with '*t-Service*' in the serving cell then the UE shall initiate cell selection procedures for the selected PLMN as defined in TS 38.304 when any of the following conditions is fulfilled:

- If the UE in RRC_IDLE has not found any new suitable cell based on searches and measurements using the intra-frequency, inter-frequency and inter-RAT information indicated in the system information within 10 s since time instance T1 provided that '*t-Service*' > T1 or

- If the UE in RRC_IDLE has not found any new suitable cell based on searches and measurements using the intra-frequency, inter-frequency and inter-RAT information indicated in the system information within 10 s since the time instance '*t-Service*'.

- Where, T1 is the time instance in seconds when the UE has determined that the serving cell does not fulfil the cell selection criterion S.

Table 4.2C.2.2-1: N_{serv}

DRX cycle length [s]	Scaling Factor (N1)	N_{serv} [number of DRX cycles]
	FR1	
0.32	1	M1*N1*4
0.64		M1*N1*4
1.28		N1*2
2.56		N1*2
Note 1: The UE is not required to meet the requirements for 2.56s DRX cycle length for earth-moving LEO deployment.		

4.2C.2.3 Measurements of intra-frequency NR cells

The UE shall be able to identify new intra-frequency cells and perform SS-RSRP and SS-RSRQ measurements of the identified intra-frequency cells without an explicit intra-frequency neighbour list containing physical layer cell identities.

If Srxlev > SnonIntraSearchP and Squal > SnonIntraSearchQ, and the distance between UE and serving cell reference location is smaller than *distanceThresh* if the *distanceThresh* is configured (see TS 36.304[1]) and UE has location information, then the UE may not perform measurement of intra-frequency.

The UE shall be able to evaluate whether a newly detectable intra-frequency cell meets the reselection criteria defined in TS38.304 [1] within $K_{multi_SMTC} * T_{detect,NR_Intra}$ when that $T_{reselection}$= 0 if the UE does not support the feature for enhanced RRM requirements defined in TS38.306 [14] or if the *enhancedMeasurementLEO-r17* is not enabled, or within within $K_{multi_SMTC} * T_{detect,NR_Intra_enh}$ if the UE supports the feature for enhanced RRM requirements defined in TS38.306 [14] and the *enhancedMeasurementLEO-r17* is enabled. An intra frequency cell is considered to be detectable according to the conditions defined in Annex B.1.6 for a corresponding Band.

The UE shall measure SS-RSRP and SS-RSRQ at least every $K_{multi_SMTC} * T_{measure,NR_Intra}$ (see table 4.2C.2.3-1) if the UE does not support the feature for enhanced RRM requirements defined in TS38.306 [14] or if the *enhancedMeasurementLEO-r17* is not enabled, or every $K_{multi_SMTC} * T_{measure,NR_Intra_enh}$ (see table 4.2C.2.3-2) if the UE supports the feature for enhanced RRM requirements defined in TS38.306 [14] and the *enhancedMeasurementLEO-r17* is enabled, for intra-frequency cells that are identified and measured according to the measurement rules.

The UE shall filter SS-RSRP and SS-RSRQ measurements of each measured intra-frequency cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least $T_{measure,NR_Intra}/2$.

The parameter K_{multi_SMTC} is the scaling factor for measurements of multiple SMTCs which correspond to different satellites.

If SMTCs do not overlap with each other,

- $K_{multi_SMTC} = 1$, if GEO satellites are measured on the carrier;

- $K_{multi_SMTC} = \left\lceil \frac{N_{LEO,i}}{N_{LEO,simul}} \right\rceil$, if LEO satellites are measured on the carrier;

- If SMTCs partially overlap with each other,

  - $K_{multi_SMTC} = N_{SMTC,overlap}$, if only GEO satellites are measured on the carrier;

- $K_{multi_SMTC} = \sum_{i=1}^{N_{SMTC,overlap}} \left\lceil \frac{N_{LEO,i}}{N_{LEO,simul}} \right\rceil$, if only LEO satellites are measured on the carrier;

where

$N_{LEO,i}$ is the number of LEO satellites to be measured within i-th SMTC,

$N_{LEO,simul}$ is the number of LEO satellites that UE can measure in parallel within an SMTC,

$N_{SMTC,overlap}$ is the number of SMTCs that partially overlap with each other.

The UE shall not consider a NR neighbour cell in cell reselection, if it is indicated as not allowed in the measurement control system information of the serving cell.

For an intra-frequency cell that has been already detected, but that has not been reselected to, the filtering shall be such that the UE shall be capable of evaluating that the intra-frequency cell has met reselection criterion defined in TS38.304 [1] within $K_{multi_SMTC} * T_{evaluate,NR_Intra}$ if the UE does not support the feature for enhanced RRM requirements defined in TS38.306 [14] or if the *enhancedMeasurementLEO-r17* is not enabled, or within $K_{multi_SMTC} * T_{evaluate,NR_Intra_enh}$ if the UE supports the feature for enhanced RRM requirements defined in TS38.306 [14] and the *enhancedMeasurementLEO-r17* is enabled, when $T_{reselection} = 0$ as specified in table 4.2C.2.3-1 or table 4.2C.2.3-2 provided that:

- when *rangeToBestCell* is not configured:
- the cell is at least 3dB better ranked in FR1 or 4.5dB better ranked in FR2.
- when *rangeToBestCell* is configured:
- the cell has the highest number of beams above the threshold *absThreshSS-BlocksConsolidation* among all detected cells whose cell-ranking criterion R value in TS38.304 [1] is within *rangeToBestCell* of the cell-ranking criterion R value of the highest ranked cell.
  - if there are multiple such cells, the cell has the highest rank among them.
    - the cell is at least 3dB better ranked in FR1 or 4.5dB better ranked in FR2 if the current serving cell is among them.

When evaluating cells for reselection, the SSB side conditions apply to both serving and non-serving intra-frequency cells.

If $T_{reselection}$ timer has a nonzero value and the intra-frequency cell is satisfied with the reselection criteria which are defined in TS38.304 [1], the UE shall evaluate this intra-frequency cell for the $T_{reselection}$ time. If this cell remains satisfied with the reselection criteria within this duration, then the UE shall reselect that cell.

Table 4.2C.2.3-1: T_{detect,NR_Intra}, $T_{measure,NR_Intra}$ and $T_{evaluate,NR_Intra}$

DRX cycle length [s]	Scaling Factor (N1)	T_{detect,NR_Intra} [s] (number of DRX cycles)	$T_{measure,NR_Intra}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Intra}$ [s] (number of DRX cycles)
	FR1			
0.32	1	11.52 x N1 x M2 (36 x N1 x M2)	1.28 x N1 x M2 (4 x N1 x M2)	5.12 x N1 x M2 (16 x N1 x M2)
0.64		17.92 x N1 (28 x N1)	1.28 x N1 (2 x N1)	5.12 x N1 (8 x N1)
1.28		32 x N1 (25 x N1)	1.28 x N1 (1 x N1)	6.4 x N1 (5 x N1)
2.56		58.88 x N1 (23 x N1)	2.56 x N1 (1 x N1)	7.68 x N1 (3 x N1)

Note 1: M2 = 2 if SMTC periodicity of measured intra-frequency cell > 20 ms and $1<N_{SMTC} \leq 4$ upon more than 1 SMTC configured at the UE; M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms and $N_{SMTC}=1$ upon 1 SMTC configured at the UE; otherwise M2=1. Where, N_{SMTC} is the number of SMTCs configured by SAN If different SMTC periodicities are configured for different cells, the SMTC periodicity in this note is the one used by the cell being identified. During PSS/SSS detection, the periodicity of the SMTC configured for the intra-frequency carrier is assumed, and if the actual SSB transmission periodicity is greater than the SMTC configured for the intra-frequency carrier, longer T_{detect, NR_intra} is expected.

Note 2: The UE is not required to meet the requirements for 2.56s DRX cycle length for earth-moving LEO deployment.

Table 4.2C.2.3-2: T_{detect,NR_Intra_enh}, $T_{measure,NR_Intra_enh}$ and $T_{evaluate,NR_Intra_enh}$

DRX cycle length [s]	T_{detect,NR_Intra_enh} [s] (number of DRX cycles)	$T_{measure,NR_Intra_enh}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Intra_enh}$ [s] (number of DRX cycles)
0.32	2.56 x M2 (8 x M2) Note 1	0.32 x M3 (1 x M3) Note 1	0.96 x M4 (3 x M4) Note 1
0.64	5.12 (8)	0.64 (1)	1.92 (3)
1.28	8.96 (7)	1.28 (1)	3.84 (3)
2.56	58.88 (23)	2.56 (1)	7.68 (3)
Note 1: When SMTC < = 40 ms, M2 = M3 = M4 = 1; and when SMTC > 40 ms, M2 = 2, M3 = M4 = 2.5			

If '*t-Service*' is broadcasted and applicable, UE shall be able to detect, measure, and evaluate neighbour cells before the serving cell stops serving the area regardless of whether the distance condition based on serving cell reference location is met or the legacy Srxlev/Squal condition are met, and when to start the detection, measurement and evaluation on neighbour cells is up to UE implementation. This requirement does not apply when the time span from the last slot of SI transmission within SI modification period where the broadcasting of the last updated value for t-Service is acquired by the UE for the first time to the first slot when the cell is scheduled to stop serving the area according to the broadcasted information is less than $T_{trigger}$.

$$T_{trigger} = \max(T_{detect,NR_Intra}, K_{carrier} * T_{detect,NR_Inter}),$$

where

- $K_{carrier}$ is the number of NR inter-frequency carriers indicated by the serving cell,
- T_{detect,NR_Intra} refers to intra-frequency cell detection delay in IDLE/INACTIVE mode defined Table Table 4.2C.2.3-2,
- T_{detect,NR_Inter} refers to inter-frequency cell detection delay in IDLE/INACTIVE mode defined Table 4.2C.2.4-2.

The requirements in this clause apply provided that the number of SMTCs for any inter-frequency carrier does not exceed the *parallelSMTC-r17*, otherwise UE may select one or subset of all the configured SMTCs sequentially for performing the measurements until all of the SMTCs can be measured. The selection of SMTCs to be used is up to UE implementation, and in this case, measurement period longer than the corresponding measurement period specified in Table 4.2C.2.3-1 and Table 4.2C.2.3-2 is expected.

4.2C.2.4 Measurements of inter-frequency NR cells

The UE shall be able to identify new inter-frequency cells and perform SS-RSRP or SS-RSRQ measurements of identified inter-frequency cells if carrier frequency information is provided by the serving cell, even if no explicit neighbour list with physical layer cell identities is provided.

If Srxlev > $S_{nonIntraSearchP}$ and Squal > $S_{nonIntraSearchQ}$, and the distance between UE and serving cell reference location is smaller than *distanceThresh* if *distanceThresh* is configured and UE has location information, then the UE shall search for inter-frequency layers of higher priority at least every $T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in clause 4.2C.2.9.

If Srxlev ≤ $S_{nonIntraSearchP}$ or Squal ≤ $S_{nonIntraSearchQ}$, or the distance between UE and serving cell reference location is larger than *distanceThresh* if *distanceThresh* is configured and UE has location information, then the UE shall search for and measure inter-frequency layers of higher, equal or lower priority in preparation for possible reselection. The requirements apply provided that the distance exceeds the *distanceThresh* by a margin of 50 m. In this scenario, the minimum rate at which the UE is required to search for and measure higher priority layers shall be the same as that defined below in this clause.

The UE shall be able to evaluate whether a newly detectable inter-frequency cell meets the reselection criteria defined in TS38.304 [1] within $K_{multi_SMTC} * K_{carrier} * T_{detect,NR_Inter}$ if the UE does not support the feature for enhanced RRM requirements defined in TS38.306 [14] or if the *enhancedMeasurementLEO-r17* is not enabled, or within $K_{multi_SMTC} * K_{carrier} * T_{detect,NR_Inter_enh}$ if the UE supports the feature for enhanced RRM requirements defined in TS38.306 [14] and the *enhancedMeasurementLEO-r17* is enabled, if at least carrier frequency information is provided for inter-frequency neighbour cells by the serving cells when $T_{reselection}$ = 0 provided that the reselection criteria is met by a margin of at least [5]dB in FR1 for reselections based on ranking or [6]dB in FR1 for SS-RSRP reselections based on absolute

priorities or [4]dB in FR1 for SS-RSRQ reselections based on absolute priorities. The parameter $K_{carrier}$ is the number of NR inter-frequency carriers indicated by the serving cell.

The parameter K_{multi_SMTC} is the scaling factor for measurement of multiple SMTCs or multiple satellites

- If SMTCs do not overlap with each other,
  - $K_{multi_SMTC} = 1$, if GEO satellites are measured on the carrier;
  - $K_{multi_SMTC} = \left\lceil \frac{N_{LEO,i}}{N_{LEO,simul}} \right\rceil$, if LEO satellites are measured on the carrier;
- If SMTCs partially overlap with each other,
  - $K_{multi_SMTC} = N_{SMTC,overlap}$, if only GEO satellites are measured on the carrier;
  - $K_{multi_SMTC} = \sum_{i=1}^{N_{SMTC,overlap}} \left\lceil \frac{N_{LEO,i}}{N_{LEO,simul}} \right\rceil$, if only LEO satellites are measured on the carrier;

  where

  $N_{LEO,i}$ is the number of LEO satellites to be measured within i-th SMTC,

  $N_{LEO,simul}$ is the number of LEO satellites that UE can measure in parallel within an SMTC,

$N_{SMTC,overlap}$ is the number of SMTCs that partially overlap with each other. An inter-frequency cell is considered to be detectable according to the conditions defined in Annex B.1.7 for a corresponding Band.

When higher priority cells are found by the higher priority search, they shall be measured at least every $T_{measure,NR_Inter}$. If, after detecting a cell in a higher priority search, it is determined that reselection has not occurred then the UE is not required to continuously measure the detected cell to evaluate the ongoing possibility of reselection. However, the minimum measurement filtering requirements specified later in this clause shall still be met by the UE before it makes any determination that it may stop measuring the cell. If the UE detects on a NR carrier a cell whose physical identity is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform measurements on that cell.

The UE shall measure SS-RSRP or SS-RSRQ at least every $K_{multi_SMTC} * K_{carrier} * T_{measure,NR_Inter}$ (see table 4.2C.2.4-1) if the UE does not support the feature for enhanced RRM requirements defined in TS38.306 [14] or if the *enhancedMeasurementLEO-r17* is not enabled, or every $K_{multi_SMTC} * K_{carrier} * T_{measure,NR_Inter_enh}$ (see table 4.2C.2.4-2) if the UE supports the feature for enhanced RRM requirements defined in TS38.306 [14] and the *enhancedMeasurementLEO-r17*is enabled, for identified lower or equal priority inter-frequency cells. If the UE detects on a NR carrier a cell whose physical identity is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform measurements on that cell.

The UE shall filter SS-RSRP or SS-RSRQ measurements of each measured higher, lower and equal priority inter-frequency cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least $T_{measure,NR_Inter}/2$.

The UE shall not consider a NR neighbour cell in cell reselection, if it is indicated as not allowed in the measurement control system information of the serving cell.

For an inter-frequency cell that has been already detected, but that has not been reselected to, the filtering shall be such that the UE shall be capable of evaluating that the inter-frequency cell has met reselection criterion defined TS 38.304 [1] within $K_{multi_SMTC} * K_{carrier} * T_{evaluate,NR_Inter}$ if the UE does not support [capability for enhanced requriements] or if the [NW configuration for enhanced requirements] is not enabled, or within $K_{multi_SMTC} * K_{carrier} * T_{evaluate,NR_Inter_enh}$ if the UE supports the feature for enhanced RRM requirements defined in TS38.306 [14] and the *enhancedMeasurementLEO-r17* is enabled, when $T_{reselection} = 0$ as specified in table 4.2C.2.4-1 provided that the reselection criteria is met by

- the condition when performing equal priority reselection and

  when *rangeToBestCell* is not configured:

  - the cell is at least [5]dB better ranked in FR1 or.

  when *rangeToBestCell* is configured:

- the cell has the highest number of beams above the threshold *absThreshSS-BlocksConsolidation* among all detected cells whose cell-ranking criterion R value in TS38.304 [1] is within *rangeToBestCell* of the cell-ranking criterion R value of the highest ranked cell.
  - if there are multiple such cells, the cell has the highest rank among them
  - the cell is at least [5]dB better ranked in FR1 if the current serving cell is among them. or

- [6]dB in FR1 for SS-RSRP reselections based on absolute priorities or
- 4]dB in FR1 for SS-RSRQ reselections based on absolute priorities.

When evaluating cells for reselection, the SSB side conditions apply to both serving and inter-frequency cells.

If $T_{reselection}$ timer has a non zero value and the inter-frequency cell is satisfied with the reselection criteria, the UE shall evaluate this inter-frequency cell for the $T_{reselection}$ time. If this cell remains satisfied with the reselection criteria within this duration, then the UE shall reselect that cell.

The UE is not expected to meet the measurement requirements for an inter-frequency carrier under DRX cycle=320 ms defined in Table 4.2C.2.4-1 under the following conditions:

- $T_{SMTC_intra} = T_{SMTC_inter} = 160$ ms; where
  - TSMTC_intra is the periodicity of the SMTC configured for the intra-frequency carrier if no identified intra-frequency cell is in the PCI list of smtc2-LP on this intra-frequency carrier; TSMTC_intra is the periodicity of the smtc2-LP configured for the intra-frequency carrier if at least one identified intra-frequency cell is in the PCI list of smtc2-LP on this intra-frequency carrier. During PSS/SSS detection, the periodicity of the SMTC configured for the intra-frequency carrier is assumed for TSMTC_intra. If the actual SSB transmission periodicity is greater than the SMTC configured for the intra-frequency carrier, longer Tdetect, NR_intra is expected.
  - TSMTC_inter is the actual SMTC periodicity used by the inter-frequency cell being identified. During PSS/SSS detection, the periodicity of the SMTC configured for the inter-frequency carrier is assumed for TSMTC_inter. If the actual SSB transmission periodicity is greater than the SMTC configured for the inter-frequency carrier, longer Tdetect, NR_inter is expected.
- SMTC occasions configured for the inter-frequency carrier occur up to 1 ms before the start or up to 1 ms after the end of the SMTC occasions configured for the intra-frequency carrier, and
- SMTC occasions configured for the intra-frequency carrier and for the inter-frequency carrier occur up to 1 ms before the start or up to 1 ms after the end of the paging occasion in TS38.304 [1].

Table 4.2C.2.4-1: T_{detect,NR_Inter}, $T_{measure,NR_Inter}$ and $T_{evaluate,NR_Inter}$

DRX cycle length [s]	Scaling Factor (N1)	T_{detect,NR_Inter} [s] (number of DRX cycles)	$T_{measure,NR_Inter}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Inter}$ [s] (number of DRX cycles)
	FR1			
0.32	1	11.52 x N1 x 1.5 (36 x N1 x 1.5)	1.28 x N1 x 1.5 (4 x N1 x 1.5)	5.12 x N1 x 1.5 (16 x N1 x 1.5)
0.64		17.92x N1 (28 x N1)	1.28 x N1 (2 x N1)	5.12 x N1 (8 x N1)
1.28		32 x N1 (25 x N1)	1.28 x N1 (1 x N1)	6.4 x N1 (5 x N1)
2.56		58.88 x N1 (23 x N1)	2.56 x N1 (1 x N1)	7.68 x N1 (3 x N1)
Note 1: UE is not required to fulfil the requirements for 2.56s DRX cycle length for earth-moving LEO deployment.				

Table 4.2C.2.4-2: T_{detect,NR_Inter_enh}, $T_{measure,NR_Inter_enh}$ and $T_{evaluate,NR_Inter_enh}$

DRX cycle length [s]	T_{detect,NR_Inter_enh} [s] (number of DRX cycles)	$T_{measure,NR_Inter_enh}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Inter_enh}$ [s] (number of DRX cycles)
0.32	[3.2 x M2 (10 x M2)] Note 1	[0.32 x M3 ([1] x M3)] Note 1	0.96 x M4 (3 x M4) Note 1
0.64	[6.4 (10)]	[0.64 (1)]	1.92 (3)
1.28	[10.24 (8)]	1.28 (1)	3.84 (3)
2.56	58.88 (23)	2.56 (1)	7.68 (3)

Note 1:	When SMTC < = 40 ms, M2 = M3 = M4 = 1; and when SMTC > 40 ms, M2 = 1.5, M3 = M4 = 2

If *t-Service* is broadcasted and applicable, UE shall be able to detect, measure, and evaluate neighbour cells before the serving cell stops serving the area regardless of whether the distance condition based on serving cell reference location or the legacy Srxlev/Squal condition are met, and when to start detection, measurement, and evaluation is up to UE implementation. This requirement does not apply when the time span from the last slot of SI transmission within SI modification period where the broadcasting of the last updated value for t-Service is acquired by the UE for the first time to the first slot when the cell is scheduled to stop serving the area according to the broadcasted information is less than $T_{trigger}$, and $T_{trigger}$ = max(T_{detect,NR_Intra}, $K_{carrier}$* T_{detect,NR_Inter}) when serving cell is below the search threshold, and $T_{trigger}$ = max(T_{detect,NR_Intra}, N_{layer}* [60s]) when serving cell is above the search threshold, where

- $K_{carrier}$ is the number of NR inter-frequency carriers indicated by the serving cell,
- N_{layer} is the total number of higher priority NR carrier frequencies broadcasted in system information,
- T_{detect,NR_Intra} refers to HST intra-frequency cell detection delay in IDLE/INACTIVE mode defined Table 4.2.2.3-2,
- T_{detect,NR_Inter} refers to HST inter-frequency cell detection delay in IDLE/INACTIVE mode defined Table 4.2.2.4-2.

The requriements in this clause apply provided that the number of SMTCs for any inter-frequency carrier does not exceed the [UE capability], otherwise UE may select one or subset of all the configured SMTCs sequentially until all of the SMTCs can be measured, the selection of SMTCs to be used is up to UE implementation, and longer measurement delay than the corresponding measurement period specified in Table 4.2C.2.4-1 and Table 4.2C.2.4-2 is expected.

The requirements in this clause apply provided that the valid information for the satellite serving the target cell has been provided by the serving cell.

The requirements in this clause apply provided that SSB of neighbour cells are within the time shifted SMTC.

4.2C.2.5 Maximum interruption in paging reception

UE shall perform the cell re-selection with minimum interruption in monitoring downlink channels for paging reception.

At intra-frequency and inter-frequency cell re-selection, the UE shall monitor the downlink of serving cell for paging reception until the UE is capable to start monitoring downlink channels of the target intra-frequency and inter-frequency cell for paging reception. The interruption time shall not exceed T_{SI-NR} + K*$T_{target_cell_SMTC_period}$ ms.

Where,

If the target cell belongs to the same satellite as the current one, and if the target cell is known, then K = 2.

If the target cell belongs to a different satellite than the current one and the target cell's satellite is GEO, and if the target cell is known, then K = 2.

If the target cell belongs to a different satellite than the current one and the target cell's satellite is non-GEO, then K = 5 if the target cell is known.

$T_{target_cell_SMTC_period}$ is the periodicity of the SMTC occasions configured for the target NR cell. If the target cell is in the PCI list of *smtc2-LP*, the SMTC periodicity follows *smtc2-LP*; otherwise, the SMTC periodicity follows *smtc*.

T_{SI-NR} is the time required for receiving all the relevant system information data according to the reception procedure and the RRC procedure delay of system information blocks defined in TS 38.331 [2] for an NR cell.

The target cell is considered as known if it has been detectable during T_{detect,NR_Intra} or T_{detect,NR_Inter}, and the time span between SIB broadcasting cell stop time and the cell stop time is not less than Ttrigger. Otherwise, the target cell is considered as unknown, where T_{detect,NR_Intra}, T_{detect,NR_Inter} and Ttrigger are defined in 4.2C.2.3 and 4.2C.2.4. A longer interruption can be expected if the target cell is unknown.

These requirements assume sufficient radio conditions, so that decoding of system information can be made without errors and does not take into account cell re-selection failure.

4.2C.2.6 Minimum requirement at transitions

The requriements in clause 4.2.2.8 apply provided that target cell's satellite is GEO.

4.2C.2.7 Measurements of intra-frequency NR cells for UE configured with relaxed measurement criterion

The requriements in clause 4.2.2.9 apply provided that target cell's satellite is GEO.

4.2C.2.8 Measurements of inter-frequency NR cells for UE configured with relaxed measurement criterion

The requriements in clause 4.2.2.10 apply provided that target cell's satellite is GEO.

4.2C.2.9 General requirements

The UE shall search every layer of higher priority at least every $T_{higher_priority_search} = (60 * N_{layers})$ seconds, where N_{layers} is the total number of higher priority NR carrier frequencies broadcasted in system information.

4.3 Minimization of Drive Tests (MDT)

4.3.1 Introduction

UE supporting minimisation of drive tests in RRC_IDLE shall be capable of:

- logging measurements in RRC_IDLE, reporting the logged measurements and meeting requirements in clause 4.3;
- logging of RRC connection establishment failure, reporting the logged failure and meeting requirements in clause 4.3;
- logging of radio link failure and handover failure, reporting the logged failure and meeting requirements in clause 4.3.

The logged MDT requirements consist of measurement requirements as specified in clause 4.3.2 and relative time stamp accuracy requirements as specified in clause 4.3.3. Both sets of requirements are applicable for intra-frequency, inter-frequency and inter-RAT cases in RRC_IDLE state. The MDT procedures are described in TS 37.320 [31].

For RRC connection establishment failure logging and reporting, the MDT requirements consist of requirements for measurements performed and logged in RRC_IDLE state specified in clause 4.3.2 and relative time stamp accuracy requirement for RRC connection establishment failure log reporting as specified in clause 4.3.4.

4.3.2 Measurement Requirements

The requirements specified in this clause apply for the following measurements performed and logged by the UE for MDT in RRC_IDLE:

- inter-RAT E-UTRA FDD and TDD RSRP,

- inter-RAT E-UTRA FDD and TDD RSRQ,
- SS-RSRP per cell,
- SS-RSRQ per cell,
- SS-RSRP per SSB index of the serving cell,
- SS-RSRQ per SSB index of the serving cell,
- best SSB index of the serving cell,
- the number of SSBs with different SSB index which are above the threshold *absThreshSS-BlocksConsolidation* for all detected cells whose cell-ranking criterion R value is within *rangeToBestCell* of the cell-ranking criterion R value of the highest ranked cell.

The requirements apply for the measurements included in logged MDT reports and RRC connection establishment failure reports.

The measurement values that are used to meet

- serving cell and reselection requirements as specified in clauses 4.2.2.2–4.2.2.7
- shall also apply to values logged for MDT measurements in RRC_IDLE state.

4.3.3 Requirements for Relative Time Stamp Accuracy

The relative time stamp for a logged measurement is defined as the time from the moment the MDT configuration was received at the UE until the measurement was logged, see TS 38.331 [2].

The accuracy of the relative time stamping is such that the drift of the time stamping shall be not more than ± 2 seconds per hour.

4.3.4 Requirements for Relative Time Stamp Accuracy for RRC Connection Establishment Failure Log Reporting

Relative time stamp for RRC connection establishment failure log reporting is defined as the time elapsed from the last RRC connection establishment failure to the time when the log is included in the report TS 38.331 [2]. The UE shall report the RRC connection establishment failure log, while meeting the accuracy requirement specified in this clause.

The accuracy of the relative time stamping for RRC connection establishment failure log reporting is such that the drift of the time stamping shall not be larger than ± 0.72 seconds per hour and ± 10 seconds over 48 hours. The relative time stamp accuracy requirements shall apply provided that:

- no power off or detach occurs after the RRC connection establishment failure had been detected and until the log is time-stamped.

4.3.5 Requirements for Relative Time Stamp Accuracy for Radio Link Failure and Handover Failure Log Reporting

The UE shall report the radio link and handover failure log, while meeting the accuracy requirements specified in this clause.

Relative time stamp accuracy requirements for *timeSinceFailure* reported for MDT in a radio link failure or handover failure log are specified in this clause. *timeSinceFailure* determines the time elapsed from the last radio link failure or handover failure in NR to the time when the log is included in the report TS 38.331 [2].

The accuracy of the relative time stamping for *timeSinceFailure* is such that the drift of the time stamping shall not be larger than ± 0.72 seconds per hour and ± 10 seconds over 48 hours. These relative time stamp accuracy requirements shall apply provided that:

- no power off or detach occurs after the RLF or handover failure had been detected and until the log is time-stamped.

4.3C Minimization of Drive Tests (MDT) for Satellite Access

Editor's note: the exact signalling names in the clause and values are subject to confirmation by RAN2 and change during performance requirement phase, respectively. And the brackets shall be removed by further agreements.

4.3C.1 Introduction

UE supporting minimisation of drive tests in RRC_IDLE shall be capable of:

- logging measurements in RRC_IDLE, reporting the logged measurements and meeting requirements in clause 4.3C;
- logging of RRC connection establishment failure, reporting the logged failure and meeting requirements in clause 4.3C;
- logging of radio link failure and handover failure, reporting the logged failure and meeting requirements in clause 4.3C.

The logged MDT requirements consist of measurement requirements as specified in clause 4.3C.2 and relative time stamp accuracy requirements as specified in clause 4.3C.3. Both sets of requirements are applicable for intra-frequency, inter-frequency and inter-RAT cases in RRC_IDLE state. The MDT procedures are described in TS 37.320 [31].

For RRC connection establishment failure logging and reporting, the MDT requirements consist of requirements for measurements performed and logged in RRC_IDLE state specified in clause 4.3C.2 and relative time stamp accuracy requirement for RRC connection establishment failure log reporting as specified in clause 4.3C.4.

4.3C.2 Measurement Requirements

The requirements specified in this clause apply for the following measurements performed and logged by the UE for MDT in RRC_IDLE:

- SS-RSRP per cell,
- SS-RSRQ per cell,
- SS-RSRP per SSB index of the serving cell,
- SS-RSRQ per SSB index of the serving cell,
- best SSB index of the serving cell,
- the number of SSBs with different SSB index which are above the threshold *absThreshSS-BlocksConsolidation* for all detected cells whose cell-ranking criterion R value is within *rangeToBestCell* of the cell-ranking criterion R value of the highest ranked cell.

The requirements apply for the measurements included in logged MDT reports and RRC connection establishment failure reports.

The measurement values that are used to meet

- serving cell and reselection requirements as specified in clauses 4.2C.2.2–4.2C.2.9

shall also apply to values logged for MDT measurements in RRC_IDLE state.

4.3C.3 Requirements for Relative Time Stamp Accuracy

The relative time stamp for a logged measurement is defined as the time from the moment the MDT configuration was received at the UE until the measurement was logged, see TS 38.331 [2].

The accuracy of the relative time stamping is such that the drift of the time stamping shall be not more than ± 2 seconds per hour.

4.3C.4 Requirements for Relative Time Stamp Accuracy for RRC Connection Establishment Failure Log Reporting

Relative time stamp for RRC connection establishment failure log reporting is defined as the time elapsed from the last RRC connection establishment failure to the time when the log is included in the report TS 38.331 [2]. The UE shall report the RRC connection establishment failure log, while meeting the accuracy requirement specified in this clause.

The accuracy of the relative time stamping for RRC connection establishment failure log reporting is such that the drift of the time stamping shall not be larger than ± 0.72 seconds per hour and ± 10 seconds over 48 hours. The relative time stamp accuracy requirements shall apply provided that:

- no power off or detach occurs after the RRC connection establishment failure had been detected and until the log is time-stamped.

4.3C.5 Requirements for Relative Time Stamp Accuracy for Radio Link Failure and Handover Failure Log Reporting

The UE shall report the radio link and handover failure log, while meeting the accuracy requirements specified in this clause.

Relative time stamp accuracy requirements for *timeSinceFailure* reported for MDT in a radio link failure or handover failure log are specified in this clause. *timeSinceFailure* determines the time elapsed from the last radio link failure or handover failure in NR to the time when the log is included in the report TS 38.331 [2].

The accuracy of the relative time stamping for *timeSinceFailure* is such that the drift of the time stamping shall not be larger than ± 0.72 seconds per hour and ± 10 seconds over 48 hours. These relative time stamp accuracy requirements shall apply provided that:

- no power off or detach occurs after the RLF or handover failure had been detected and until the log is time-stamped.

4.4 Idle Mode CA/DC Measurements

4.4.1 Introduction

A UE supporting *idleInactiveNR-MeasReport-r16* or *idleInactiveEUTRA-MeasReport-r16* shall perform the idle mode measurement on the inter-frequency CA and DC candidate frequencies/cells and E-UTRAN inter-RAT DC candidate frequencies/cells indicated by higher layers and meet the requirement specified in this clause. The UE shall perform idle mode measurements provided that the serving cell support early measurement and is within the validity area. The idle mode measurement requirements apply to a configured carrier frequency and the serving cell are among the supported band combination of the UE.

4.4.2 Measurement Requirements

For a UE which supports *idleInactiveNR-MeasReport-r16* or *idleInactiveEUTRA-MeasReport-r16* the UE shall support the idle mode CA measurements on the serving cell, and carriers configured for idle mode CA/DC measurement reporting provided T331 has not expired, the serving cell is supporting idle mode CA/DC measurement reporting and the serving cell is in the validity area.

4.4.2.1 Detected cell requirement during state transition and Idle mode

This subclause defines the requirements for the detected cell status for the idle mode CA/DC measurement when UE transitions from RRC Connected mode to Idle mode and after UE has entered Idle mode. The requirements are applicable to an NE-DC and NR carrier aggregation capable UE which has been configured with one or more of following, one or more SCells, one E-UTRAN PSCell or one or more downlink E-UTRAN SCells during the Connected mode and which supports *idleInactiveNR-MeasReport-r16* or *idleInactiveEUTRA-MeasReport-r16.* The requirements are applicable for SCell(s) and E-UTRAN FDD and TDD PSCell and SCells.

Upon releasing the connection and if the UE has been configured with idle mode CA measurement reporting, following requirements apply concerning the detected cells in Connected mode upon state transitioning to Idle mode and during Idle mode:

- A cell which is detected cell in Connected mode prior to connection release, shall remain detected after UE has entered Idle mode and during Idle mode, provided that the following conditions are met:
  - The UE has been provided with a list of cells and/or carrier frequencies for early measurement reporting by dedicated RRC signaling and
  - The detected cell is among the list of cells or on a carrier frequency provided for early measurement reporting, and
  - The UE is provided with a valid timer T331 by dedicated RRC signaling, and
  - The detected cell and SSBs remains detectable until UE reconnect to the network and transmits the early measurement report, and
  - The carrier frequency of the detected cell and the carrier frequency of the serving cell are among the supported band combination of the UE.

An inter-RAT E-UTRAN cell is considered detectable according to RSRP, RSRP Ês/Iot, SCH_RP and SCH Ês/Iot defined in Annex B.1.1 and Annex B.1.2 in [15] for a corresponding Band. An inter-frequency cell is considered detectable according to the conditions in Annex B.1.2 and B.1.3 for a corresponding band. An SSB of an inter-frequency cell is considered detectable according to SSB_RP and SSB Ês/Iot defined in Annex B.1.2 and B.1.3 for a corresponding Band.

4.4.2.2 Measurements of inter-frequency CA/DC candidate cells

While T331 is running, the UE shall perform measurement on the configured inter-frequency carriers for idle mode CA/DC measurement reporting according to the UE measurement capability.

A UE which supports *idleInactiveNR-MeasReport-r16* shall support idle mode CA/DC measurements of:

- at least 7 inter-frequency carriers which are also configured for inter-frequency mobility measurements, and
- at least 7 inter-frequency carriers which are not configured for inter-frequency mobility measurements.

The UE shall be capable of monitoring a total of at least 7 inter-frequency carriers for idle mode CA/DC measurements comprising of carriers configured for inter-frequency mobility measurements and carriers not configured for inter-frequency mobility measurements.

For inter-frequency carriers configured for idle mode CA/DC measurements, if Srxlev $\leq S_{nonIntraSearchP}$ or Squal $\leq S_{nonIntraSearchQ}$ the inter-frequency measurement requirements in clause 4.2.2.4 shall apply, where UE shall search for and measure inter-frequency layers configured for idle mode CA/DC measurements in preparation for possible reporting. If Srxlev > $S_{nonIntraSearchP}$ and Squal > $S_{nonIntraSearchQ}$ the UE shall search for inter-frequency layers configured for idle mode CA/DC measurements at least every $T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in clause 4.2.2.7, where UE shall search for and measure inter-frequency layers configured for idle mode CA/DC measurements in preparation for possible reporting.

For UE supporting *idleInactiveNR-MeasBeamReport-r16*, if the UE is configured with *beamMeasConfigIdle-r16* for idle mode CA/DC measurement, the UE shall be capable of performing SS-RSRP, SS-RSRQ for at least

- 7 SSBs with different SSB index and/or PCI on an inter-frequency layer in FR1,
- 10 SSBs with different SSB index and/or PCI on an inter-frequency layer in FR2.

For UE supporting *idleInactiveNR-MeasBeamReport-r16*, if the UE is configured with *beamMeasConfigIdle-r16* on one or more carrier for idle mode CA/DC measurement, the UE, on each carrier, shall be able to:

- detect a newly detectable inter-frequency NR cell and perform RSRP/RSRQ measurement in preparation for reporting, and
- acquire the SSB index for a newly detectable inter-frequency NR cell if *beamMeasConfigIdle-r16* if configured on this carrier and perform RSRP/RSRQ measurement in preparation for reporting,

within the requirements defined in clause 4.2.2.4 plus k*$T_{SSB_index,NR}$, where k is the number of carriers configured for idle mode CA measurement with *beamMeasConfigIdle-r16*, and $T_{SSB_index,NR}$ is the additional time period used to acquire the index of the SSB being measured as defined in table 4.4.2.2-1.

Table 4.4.2.2-1: T_{SSB_index,NR_Inter}

DRX cycle length [s]	Scaling Factor (N1)		T_{SSB_index,NR_Inter} [s] (number of DRX cycles)
	FR1	FR2[Note1]	
0.32	1	8	N2 x 1.28 x N1 x 1.5 (N2 x 4 x N1 x 1.5)
0.64		5	N2 x 1.28 x N1 (N2 x 2 x N1)
1.28		4	N2 x 1.28 x N1 (N2 x 1 x N1)
2.56		3	N2 x 2.56 x N1 (N2 x 1 x N1)
Note 1: Applies for UE supporting power class 2&3&4. For UE supporting power class 1, N1 = 8 for all DRX cycle length. NOTE 2: N2 = 3 if the NR inter-frequency carrier for idle mode CA/DC measurement reporting is in FR1, and N2 = 3, 5 if the NR inter-frequency carrier for idle mode CA/DC measurement reporting is in FR2.			

In the absence or expiration of T331, it is up to UE implementation to perform the idle mode CA/DC measurement.

For inter-frequency carriers configured for idle mode CA/DC measurements, the UE shall be capable of performing SS-RSRP and SS-RSRQ measurements of the carriers, and the UE physical layer shall be capable of reporting SS-RSRP and SS-RSRQ measurements of the carriers configured for idle mode CA/DC measurements to higher layers, with measurement accuracy as specified in clauses 10.1.4B and 10.1.5B and 10.1.9B and 10.1.10B, respectively.

The UE shall be able to report idle mode CA/DC measurements when idle mode CA/DC measurement reporting is requested by the network.

4.4.2.3 Measurements on serving cell

The UE shall measure the RSRP and RSRQ level of the serving cell and evaluate the cell selection criterion S defined in clause 4.2.2.2 and the UE physical layer shall be capable of reporting RSRP and RSRQ measurements of the serving cell to higher layers, with measurement accuracy as specified in 10.1.2B, 10.1.3B, 10.1.7B and 10.1.8B.

4.4.2.4 Measurements of E-UTRAN inter-RAT DC candidate cells

While T331 is running, the UE shall perform measurement on the configured inter-RAT carriers for idle mode CA/DC measurement reporting according to the UE measurement capability.

A UE which supports *idleInactiveEUTRA-MeasReport-r16* shall support idle mode DC measurements of:

- at least 7 E-UTRAN inter-RAT carriers which are also configured for E-UTRAN inter-RAT mobility measurements, and
- at least 1 E-UTRAN inter-RAT carrier which is not configured for E-UTRAN inter-RAT mobility measurements.

The UE shall be capable of monitoring a total of at least 7 inter-RAT carriers for idle mode CA/DC measurements comprising of carriers configured for inter-RAT mobility measurements and carriers not configured for inter-RAT mobility measurements.

For inter-RAT carriers configured for idle mode CA/DC measurements, if Srxlev $\leq S_{nonIntraSearchP}$ or Squal $\leq S_{nonIntraSearchQ}$ the inter-RAT measurement requirements in clause 4.2.2.5 shall apply, where UE shall search for and measure inter-RAT layers configured for idle mode CA/DC measurements in preparation for possible reporting. If Srxlev > $S_{nonIntraSearchP}$ and Squal > $S_{nonIntraSearchQ}$ the UE shall search for inter-RAT layers configured for idle mode CA/DC measurements at least every $T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in clause 4.2.2, where UE shall search for and measure inter-RAT layers configured for idle mode CA/DC measurements in preparation for possible reporting.

For overlapping inter-RAT carriers configured for idle mode CA/DC measurements, the UE shall be capable of performing RSRP and RSRQ measurements of the carriers, and the UE physical layer shall be capable of reporting RSRP and RSRQ measurements of the carriers configured for idle mode CA/DC measurements to higher layers, with measurement accuracy as specified in clauses in 9.1.3B.3 and 9.1.6B.2, respectively.

The UE shall be able to report idle mode CA measurements when idle mode CA measurement reporting is requested by the network.

5 SA: RRC_INACTIVE state mobility

5.1 Cell Re-selection

5.1.1 Introduction

The cell reselection procedure allows the UE to select a more suitable cell and camp on it.

When the UE is in *Camped Normally* state on a cell, the UE shall attempt to detect, synchronise, and monitor intra-frequency, inter-frequency and inter-RAT cells indicated by the serving cell. For intra-frequency and inter-frequency cells the serving cell may not provide explicit neighbour list but carrier frequency information and bandwidth information only. UE measurement activity is also controlled by measurement rules defined in TS38.304 [1], allowing the UE to limit its measurement activity.

5.1.2 Requirements

5.1.2.1 UE measurement capability

The requirements in clause 4.2.2.1 shall apply.

5.1.2.2 Measurement and evaluation of serving cell

The requirements in clause 4.2.2.2 shall apply.

5.1.2.3 Measurements of intra-frequency NR cells

The requirements in clause 4.2.2.3 shall apply. The requirements in clause 4.2.2.9 apply for UE configured with relaxed measurement criterion.

5.1.2.4 Measurements of inter-frequency NR cells

If UE is not configured to perform PRS measurement, or if UE is configured to perform PRS measurement and supports [Parallel PRS measurements in RRC_INACTIVE state], the requirements in clause 4.2.2.4 shall apply regardless of whether the serving cell is subject to CCA or not.

If UE is configured to perform PRS measurement but does not support [Parallel PRS measurements in RRC_INACTIVE state], the requirements in clause 4.2.2.4 shall apply with $K_{carrier}$ being replaced with $K_{carrier} + 1$, regardless of whether the serving cell is subject to CCA or not.

If UE is not configured to perform PRS measurement, or if UE is configured to perform PRS measurement and supports [Parallel PRS measurements in RRC_INACTIVE state], the requirements in clause 4.2.2.10 shall apply regardless of whether the serving cell is subject to CCA or not for UE configured with relaxed measurement criterion.

If UE is configured to perform PRS measurement but does not support [Parallel PRS measurements in RRC_INACTIVE state], the requirements in clause 4.2.2.10 shall apply with $K_{carrier}$ being replaced with $K_{carrier} + 1$, regardless of whether the serving cell is subject to CCA or not for UE configured with relaxed measurement criterion.

5.1.2.5 Measurements of inter-RAT E-UTRAN cells

The requirements in clause 4.2.2.5 shall apply. The requirements in clause 4.2.2.11 shall apply for UE configured with relaxed measurement criterion.

5.1.2.6 Maximum interruption in paging reception

The requirements in clause 4.2.2.6 shall apply.

5.1.2.7 General requirements

If UE is not configured to perform PRS measurement, or if UE is configured to perform PRS measurement and supports [Parallel PRS measurements in RRC_INACTIVE state], the requirements in clause 4.2.2.7 shall apply.

If UE is configured to perform PRS measurement but does not support [Parallel PRS measurements in RRC_INACTIVE state], the requirements in clause 4.2.2.7 shall apply with N_{layers} being replaced with N_{layers} + 1.

5.1A Cell Re-selection with CCA

5.1A.1 Introduction

The cell reselection procedure allows the UE to select a more suitable cell and camp on it. The requirements in subclauses 5.1A.2.3, 5.1A.2.4, and 5.1A.2.6 apply when at least the target cell is on a carrier frequency with CCA, and the requirements in subclauses 5.1A.2.2 and 5.1A.2.5 apply when at least the camping cell is on a carrier frequency with CCA.

When the UE is in *Camped Normally* state on a cell, the UE shall attempt to detect, synchronise, and monitor intra-frequency, inter-frequency and inter-RAT cells indicated by the serving cell. For intra-frequency and inter-frequency cells the serving cell may not provide explicit neighbour list but carrier frequency information and bandwidth information only. UE measurement activity is also controlled by measurement rules defined in TS38.304, allowing the UE to limit its measurement activity.

5.1A.2 Requirements

5.1A.2.1 UE measurement capability

The requirements in clause 4.2A.2.1 shall apply.

5.1A.2.2 Measurement and evaluation when CCA is used on the serving cell

The requirements in clause 4.2A.2.2 shall apply.

5.1A.2.3 Measurements of intra-frequency NR cells when CCA is used on the serving cell and target cell

The requirements in clause 4.2A.2.3 shall apply.

5.1A.2.4 Measurements of inter-frequency NR cells when CCA is used on the target cell

The requirements in clause 4.2A.2.4 shall apply.

5.1A.2.5 Measurements of inter-RAT E-UTRAN cells when CCA is used on the serving cell

The requirements in clause 4.2.2.5 shall apply.

5.1A.2.6 Maximum interruption in paging reception when CCA is used on the target cell

The requirements in clause 4.2A.2.6 shall apply.

5.1A.2.7 General requirements

The requirements in clause 4.2.2.7 shall apply.

5.1B Cell Re-selection for RedCap

5.1B.1 Introduction

The cell reselection procedure allows the RedCapUE to select a more suitable cell and camp on it.

The requirements in subclause 5.1B.2 apply to 1 Rx RedCap UE and 2 Rx Redcap UE.

When the UE is in *Camped Normally* state on a cell, the UE shall attempt to detect, synchronise, and monitor intra-frequency, inter-frequency and inter-RAT cells indicated by the serving cell. For intra-frequency and inter-frequency cells the serving cell may not provide explicit neighbour list but carrier frequency information and bandwidth information only. UE measurement activity is also controlled by measurement rules defined in TS38.304, allowing the UE to limit its measurement activity.

5.1B.2 Requirements

5.1B.2.1 UE measurement capability

The requirements in clause 4.2B.2.1 shall apply.

5.1B.2.2 Measurement and evaluation of serving cell

The requirements in clause 4.2B.2.2 shall apply when UE is not configured with eDRX_IDLE.

When UE is configured with eDRX_IDLE, the UE shall measure the SS-RSRP and SS-RSRQ level of the serving cell and evaluate the cell selection criterion S defined in TS 38.304 [1] for the serving cell at least once every M1* T for FR1 and N1*T for FR2; where:

- T is dertermined according to clause 7.1 in [1],
- M1=2 if SMTC periodicity (T_{SMTC}) > 20 ms and T $\leq$ 0.64 second, otherwise M1=1.

The UE shall filter the SS-RSRP and SS-RSRQ measurements of the serving cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by, at least T/2.

If the UE has evaluated according to Table 5.1B.2.2-1or and Table 5.1B.2.2-2 in N_{serv_RedCap} consecutive T that the serving cell does not fulfil the cell selection criterion S, the UE shall initiate the measurements of all neighbour cells indicated by the serving cell, regardless of the measurement rules currently limiting UE measurement activities.

Table 5.1B.2.2-1: N_{serv_RedCap} for inactive Redcap UE configured with eDRX_IDLE cycle, (Frequency range FR1)

eDRX_IDLE cycle length [s]	DRX or eDRX INACTIVE cycle length[s]	T [s]	N_{serv_RedCap} [number of T]
2.56 ≤eDRX_IDLE cycle length ≤10485.76	0.32 ≤DRX_Inactive cycle length ≤2.56; or 2.56 ≤eDRX_Inactive cycle length ≤10.24 if inactive eDRX is configured	0.32	4*M1
		0.64	4*M1
		1.28	2
		2.56	2
		5.12	2
		10.24	2
Note1: T is dertermined according to clause 7.1 in [1]. Note2: M1=2 if SMTC periodicity (T_{SMTC}) > 20 ms and T≤ 0.64 second, otherwise M1=1.			

Table 5.1B.2.2-2: N_{serv_RedCap} for inactive Redcap UE configured with eDRX_IDLE cycle, (Frequency range FR2)

eDRX_IDLE cycle length [s]	DRX or eDRX INACTIVE cycle length[s]	T [s]	Scaling Factor (N1)	N_{serv_RedCap} [number of T]
2.56 ≤eDRX_IDLE cycle length ≤10485.76	0.32 ≤DRX_Inactive cycle length ≤2.56; or 2.56 ≤eDRX_Inactive cycle length ≤10.24 if inactive eDRX is configured	0.32	8	4* N1
		0.64	5	4* N1
		1.28	4	2* N1
		2.56	3	2* N1
		5.12	3	2* N1
		10.24	3	2* N1
Note1: T is dertermined according to clause 7.1 in [1].				

When UE transitions from measurements within PTW and to measurements outside PTW or vice versa during one measurement period, the UE measurement requirements apply based on the longer measurement period requirements before or after the transition.

If the UE in RRC_INACTIVE has not found any new suitable cell based on searches and measurements using the intra-frequency, inter-frequency and inter-RAT information indicated in the system information during the time T', the UE shall initiate cell selection procedures for the selected PLMN as defined in TS 38.304 [1], where

- T'= 10 s, if the UE is not configured with eDRX_inactive cycle, or
- T'= MAX (10 s, one eDRX_inactive cycle) if the UE is configured with eDRX_inactive cycle for FR1, or
- T'= MAX (10 s, N1* eDRX_inactive cycle) if the UE is configured with eDRX_inactive cycle for FR2.

5.1B.2.3 Measurements of intra-frequency NR cells

The requirements in clause 4.2.2.3 shall apply when UE is not configured with eDRX_IDLE. When UE is configured with eDRX_IDLE, the requirements defined in section 4.2.2.3 shall apply with $T_{detect,NR_Intra_RedCap}$, $T_{measure,NR_Intra_RedCap}$ and $T_{evaluate,NR_Intra_RedCap}$ defined in Table 5.1B.2.3-1 and Table 5.1B.2.3-2.

Table 5.1B.2.3-1: Tdetect, Tmeas and Tevaluate for inactive Redcap UE configured with eDRX_IDLE cycle, (Frequency range FR1)

eDRX_IDLE cycle length [s]	DRX or eDRX INACTIVE cycle length [s]	$T_{detect,NR_Intra_RedCap}$ [s] (number of DRX or eDRX INACTIVE cycles)	$T_{measure,NR_Intra_RedCap}$ [s] (number of DRX or eDRX INACTIVE cycles)	$T_{evaluate,NR_Intra_RedCap}$ [s] (number of DRX or INACTIVE eDRX cycles)
2.56 ≤eDRX_IDLE cycle length ≤ 10485.76	0.32	11.52 x M2 (36 x M2)	1.28 x M2 (4 x M2)	5.12 x M2 (16 x M2)
	0.64	17.92 (28)	1.28 (2)	5.12 (8)
	1.28	32 (25)	1.28 (1)	6.4 (5)
	2.56	58.88 (23)	2.56 (1)	7.68 (3)
	5.12	117.76 (23)	5.12 (1)	15.36 (3)
	10.24	235.52 (23)	10.24 (1)	30.72 (3)
Note1: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1.				

Table 5.1B.2.3-2: Tdetect, Tmeas and Tevaluate for inactive Redcap UE configured with eDRX_IDLE cycle, (Frequency range FR2)

eDRX_IDLE cycle length [s]	DRX or eDRX INACTIVE cycle length [s]	Scaling Factor (N1)	$T_{detect,NR_Intra_RedCap}$ [s] (number of DRX or eDRX INACTIVE cycles)	$T_{measure,NR_Intra_RedCap}$ [s] (number of DRX or eDRX INACTIVE cycles)	$T_{evaluate,NR_Intra_RedCap}$ [s] (number of DRX or eDRX INACTIVE cycles)
2.56 ≤eDRX_IDLE	0.32	8	11.52 x N1 x M2 (36 x N1 x M2)	1.28 x N1 x M2 (4 x N1 x M2)	5.12 x N1 x M2 (16 x N1 x M2)

cycle length ≤ 10485.76	0.64	5	17.92x N1 (28 x N1)	1.28 x N1 (2 x N1)	5.12 x N1 (8 x N1)
	1.28	4	32 x N1 (25 x N1)	1.28 x N1 (1 x N1)	6.4 x N1 (5 x N1)
	2.56	3	58.88 x N1 (23 x N1)	2.56 x N1 (1 x N1)	7.68 x N1 (3 x N1)
	5.12	3	117.76 x N1 (23 x N1)	5.12 x N1 (1 x N1)	15.36 x N1 (3 x N1)
	10.24	3	235.52 x N1 (23 x N1)	10.24 x N1 (1 x N1)	30.72 x N1 (3 x N1)
Note1: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1.					

5.1B.2.4 Measurements of inter-frequency NR cells

The requirements in clause 4.2.2.4 shall apply when UE is not configured with eDRX_IDLE. When UE is configured with eDRX_IDLE, the requirements defined in section 4.2.2.4 shall apply with $T_{detect,NR_Inter_RedCap}$, $T_{measure,NR_Inter_RedCap}$ and $T_{evaluate,NR_Inter_RedCap}$ defined in Table 5.1B.2.4-1 and Table 5.1B.2.4-2.

Table 5.1B.2.4-1: Tdetect, Tmeas and Tevaluate for inactive Redcap UE configured with eDRX_IDLE cycle, (Frequency range FR1)

eDRX_IDLE cycle length [s]	DRX or eDRX INACTIVE cycle length [s]	$T_{detect,NR_Inter_RedCap}$ [s] (number of DRX or eDRX INACTIVE cycles)	$T_{measure,NR_Inter_RedCap}$ [s] (number of DRX or eDRX INACTIVE cycles)	$T_{evaluate,NR_Inter_RedCap}$ [s] (number of DRX or eDRX INACTIVE cycles)
2.56 ≤eDRX_IDLE cycle length ≤ 10485.76	0.32	11.52 x 1.5 (36 x 1.5)	1.28 x 1.5 (4 x 1.5)	5.12 x 1.5 (16 x 1.5)
	0.64	17.92 (28)	1.28 (2)	5.12 (8)
	1.28	32 (25)	1.28 (1)	6.4 (5)
	2.56	58.88 (23)	2.56 (1)	7.68 (3)
	5.12	117.76 (23)	5.12 (1)	15.36 (3)
	10.24	235.52(23)	10.24 (1)	30.72 (3)

Table 5.1B.2.4-2: Tdetect, Tmeas and Tevaluate for inactive Redcap UE configured with eDRX_IDLE cycle, (Frequency range FR2)

eDRX_IDLE cycle length [s]	DRX or eDRX INACTIVE cycle length [s]	Scaling Factor (N1)	$T_{detect,NR_Inter_RedCap}$ [s] (number of DRX or eDRX INACTIVE cycles)	$T_{measure,NR_Inter_RedCap}$ [s] (number of DRX or eDRX INACTIVE cycles)	$T_{evaluate,NR_Inter_RedCap}$ [s] (number of DRX or eDRX INACTIVE cycles)
2.56 ≤eDRX_IDLE cycle length ≤ 10485.76	0.32	8	11.52 x N1 x 1.5 (36 x N1 x 1.5)	1.28 x N1 x 1.5 (4 x N1 x 1.5)	5.12 x N1 x 1.5 (16 x N1 x 1.5)
	0.64	5	17.92x N1 (28 x N1)	1.28 x N1 (2 x N1)	5.12 x N1 (8 x N1)
	1.28	4	32 x N1 (25 x N1)	1.28 x N1 (1 x N1)	6.4 x N1 (5 x N1)
	2.56	3	58.88 x N1 (23 x N1)	2.56 x N1 (1 x N1)	7.68 x N1 (3 x N1)
	5.12	3	117.76 x N1 (23 x N1)	5.12 x N1 (1 x N1)	15.36 x N1 (3 x N1)
	10.24	3	235.52 x N1 (23 x N1)	10.24 x N1 (1 x N1)	30.72 x N1 (3 x N1)

5.1B.2.5 Measurements of inter-RAT E-UTRAN cells

The requirements in clause 4.2B.2.5 shall apply when UE is not configured with eDRX_IDLE. When UE is configured with eDRX_IDLE, the requirements defined in section 4.2B.2.5 shall apply with $T_{detect,\ EUTRAN_RedCap}$, $T_{measure,\ EUTRAN\ _RedCap}$ and $T_{evaluate,\ EUTRAN\ _RedCap}$ defined in Table 5.1B.2.5-1.

Table 5.1B.2.5-1: $T_{detect, EUTRAN_RedCap}$, $T_{measure, EUTRAN_RedCap}$ and $T_{evaluate, EUTRAN_RedCap}$ for inactive Redcap UE configured with eDRX_IDLE cycle, (Frequency range FR1)

eDRX_IDLE cycle length [s]	DRX or eDRX INACTIVE cycle length [s]	$T_{detect, EUTRAN_RedCap}$ [s] (number of DRX or eDRX INACTIVE cycles)	$T_{measure, EUTRAN_RedCap}$ [s] (number of DRX or eDRX INACTIVE cycles)	$T_{evaluate, EUTRAN_RedCap}$ [s] (number of DRX or eDRX INACTIVE cycles)
2.56 ≤eDRX_IDLE cycle length ≤ 10485.76	0.32	11.52 x 1.5 (36 x 1.5)	1.28 x 1.5 (4 x 1.5)	5.12 x 1.5 (16 x 1.5)
	0.64	17.92 (28)	1.28 (2)	5.12 (8)
	1.28	32 (25)	1.28 (1)	6.4 (5)
	2.56	58.88 (23)	2.56 (1)	7.68 (3)
	5.12	117.76 (23)	5.12 (1)	15.36 (3)
	10.24	235.52(23)	10.24 (1)	30.72 (3)

5.1B.2.6 Maximum interruption in paging reception

The requirements in clause 4.2B.2.6 shall apply for RedCap UEs.

For RedCap UE in HD-FDD mode, if a paging occasion overlaps with CG-SDT transmission then the UE shall monitor the paging during the paging occasion. In this case the UE is allowed to drop the CG-SDT transmission.

5.1B.2.7 General requirements

The requirements in sub-clause 4.2B.2.7 shall apply.

5.1B.2.8 Minimum requirement at transitions

The requirements in sub-clause 4.2B.2.8 shall apply.

5.1B.2.9 Measurements of intra-frequency NR cells for UE configured with relaxed measurement criterion

The requirements in clause 4.2B.2.9 apply for UE configured with relaxed measurement criterion.

5.1B.2.10 Measurements of inter-frequency NR cells for UE configured with relaxed measurement criterion

The requirements in clause 4.2B.2.10 apply for UE configured with relaxed measurement criterion.

5.1B.2.11 Measurements of inter-RAT E-UTRAN cells for UE configured with relaxed measurement criterion

The requirements in clause 4.2B.2.11 apply for UE configured with relaxed measurement criterion.

5.2 Void

5.2B Configured Grant based Small Data Transmissions (CG-SDT) for RedCap

5.2B.1 Introduction

This section contains the requirements for Small Data Transmissions (SDT) for 1 Rx RedCap and 2 Rx RedCap.

The 1 Rx RedCap UE for determining whether to perform SDT procedure defined in clause 5.27 [7] applies:

- sdt-RSRP-Threshold-r17 as the signaled value of sdt-RSRP-Threshold-r17 [2] + 1 dB.

5.2B.2 Requirements on UE synchronization for small data transmissions for RedCap

The requirements in clause 5.2B.2 shall apply for RedCap UEs.

5.2B.2.1 TA validation requirements for RedCap

When *cg-SDT-RSRP-ChangeThreshold* [TS 38.331] is configured for TA validation based on the RSRP change criterion according to clause 5.27.2 in [TS 38.321], the UE is allowed to transmit using CG-SDT using the timing derived using the latest available N_{TA} value as specified in subclause 7.1 provided that

- the first RSRP ($RSRP_1$) measurement and the second RSRP ($RSRP_2$) measurements used in the TA validation are valid measurements and,
- timing alignment validation for transmission using CG-SDT is valid according to the validation criteria in clause 5.27.2 in [TS 38.321].

$RSRP_1$ and $RSRP_2$ are considered valid provided that the conditions in Table 5.2B.2-1 are met for FR1 when UE is not configured with any eDRX cycle by serving gNB or core network.

$RSRP_1$ and $RSRP_2$ are considered valid provided that the conditions in Table 5.2B.2-2 are met for FR2-1 regardless of whether the UE is configured with eDRX cycle by serving gNB or core network (AMF).

$RSRP_1$ and $RSRP_2$ are considered valid provided that the conditions in Table 5.2B.2-3 are met for FR1 when UE is configured:

- only with RAN eDRX cycle ($T_{eDRX-RAN}$) by the serving gNB, or
- with both $T_{eDRX-RAN}$ by serving gNB and CN eDRX cycle ($T_{eDRX-CN}$) by the core network (AMF)

Table 5.2B.2.1-1 Valid measurement for FR1 without eDRX cycle

Measurement	FR1
$RSRP_1$	$(T1 - \min(640ms, M1*T_{DRX})) \le T1' \le (T1 + \min(640ms, M1*T_{DRX}))$
$RSRP_2$	$(T2 - \min(640ms, M1*T_{DRX})) \le T2' \le T2$

Table 5.2B.2.1-2 Valid measurement for FR2-1

Measurement	FR2-1
$RSRP_1$	$(T1 - \max\{480ms, 8*\text{SMTC periodicity}\}) \le T1' \le (T1 + \max\{480ms, 8*\text{SMTC periodicity}\})$
$RSRP_2$	$(T2 - \max\{480ms, 8*\text{SMTC periodicity}\}) \le T2' \le T2$

Table 5.2B.2.1-3 Valid measurement for FR1 with eDRX cycle

Measurement	FR1
$RSRP_1$	$(T1 - \min(640ms, M1* T)) \le T1' \le (T1 + \min(640ms, M1* T))$
$RSRP_2$	$(T2 - \min(640ms, M1* T_{eDRX-RAN})) \le T2' \le T2$
Note 1: T is determined according to clause 7.1 in [1].	

If at least one of $RSRP_1$ and $RSRP_2$ is considered to be invalid based on the above conditions, then the UE shall not validate the CG-SDT using $RSRP_1$ and $RSRP_2$ and shall not transmit using CG-SDT. Additionally, the UE shall not transmit in an CG-SDT occasion that occurs more than 640 ms after T2.

Where:

- T1 is the time when the latest N_{TA} was obtained by the UE via Timing Advance Command MAC control element.

- T1' is the time when the UE has completed $RSRP_1$.
- T2 is the time when the UE performs TA validation as defined in clause 5.27.2 in [TS 38.321] for transmission using CG-SDT.
- T2' is the time when the UE has completed $RSRP_2$.
- T_{DRX} is the DRX cycle length in ms.
- M1 the scaling factor as defined in clause 4.2.2.2.

5.2B.2.2 Scheduling restriction

The requirements in clause 5.1B.2.4 shall apply for RedCap UEs.

5.2B.2.3 Applicability conditions for SDT

The UE is not required to meet the following measurement requirements during subsequent SDT transmissions:

- Measurements of inter-frequency NR cells in clause 5.1.2.4
- Measurements of inter-RAT E-UTRAN cells in clause 5.1.2.5

5.3 Minimization of Drive Tests (MDT)

5.3.1 Introduction

UE supporting minimisation of drive tests in RRC_INACTIVE shall be capable of:

- logging measurements in RRC_INACTIVE, reporting the logged measurements and meeting requirements in clause 5.3.1;
- logging of RRC connection establishment failure, reporting the logged failure and meeting requirements in clause 5.3.1;
- logging of radio link failure and handover failure, reporting the logged failure and meeting requirements in clause 5.3.1.

The logged MDT requirements consist of measurement requirements as specified in clause 5.3.2 and relative time stamp accuracy requirements as specified in clause 5.3.3. Both sets of requirements are applicable for intra-frequency, inter-frequency and inter-RAT cases in RRC_INACTIVE state. The MDT procedures are described in TS 37.320 [31].

For RRC connection establishment failure logging and reporting, the MDT requirements consist of requirements for measurements performed and logged in RRC_INACTIVE state specified in clause 5.3.2 and relative time stamp accuracy requirement for RRC connection establishment failure log reporting as specified in clause 5.3.4.

5.3.2 Measurement Requirements

The measurements and measurement requirements applicable for MDT in RRC_INACTIVE are the same as specified for MDT in RRC_IDLE in clause 4.3.2.

5.3.3 Requirements for Relative Time Stamp Accuracy

The requirements for relative time stamp accuracy applicable for MDT in RRC_INACTIVE are the same as specified for MDT in RRC_IDLE in clause 4.3.3.

5.3.4 Requirements for Relative Time Stamp Accuracy for RRC Connection Establishment Failure Log Reporting

The requirements for relative time stamp accuracy for RRC connection establishment failure applicable for MDT in RRC_INACTIVE are the same as specified for MDT in RRC_IDLE in clause 4.3.4.

5.3.5 Requirements for Relative Time Stamp Accuracy for Radio Link Failure and Handover Failure Log Reporting

The requirements for relative time stamp accuracy for RRC link failure and handover failure applicable for MDT in RRC_INACTIVE are the same as specified for MDT in RRC_IDLE in clause 4.3.5.

5.3.6 Requirements for Relative Time Stamp Accuracy for RRC Resume Failure Log Reporting

The requirements for relative time stamp accuracy for RRC resume failure applicable for MDT in RRC_INACTIVE are the same as specified for MDT in RRC_IDLE in clause 4.3.4.

5.3C Minimization of Drive Tests (MDT) for Satellite Access

Editor's note: the exact signalling names in the clause and values are subject to confirmation by RAN2 and change during performance requirement phase, respectively. And the brackets shall be removed by further agreements.

5.3C.1 Introduction

UE supporting minimisation of drive tests in RRC_INACTIVE shall be capable of:

- logging measurements in RRC_INACTIVE, reporting the logged measurements and meeting requirements in clause 5.3C;
- logging of RRC connection establishment failure, reporting the logged failure and meeting requirements in clause 5.3C;
- logging of radio link failure and handover failure, reporting the logged failure and meeting requirements in clause 5.3C.

The logged MDT requirements consist of measurement requirements as specified in clause 5.3C.2 and relative time stamp accuracy requirements as specified in clause 5.3C.3. Both sets of requirements are applicable for intra-frequency and inter-frequency cases in RRC_INACTIVE state. The MDT procedures are described in TS 37.320 [31].

For RRC connection establishment failure logging and reporting, the MDT requirements consist of requirements for measurements performed and logged in RRC_INACTIVE state specified in clause 5.3C.2 and relative time stamp accuracy requirement for RRC connection establishment failure log reporting as specified in clause 5.3C.4.

5.3C.2 Measurement Requirements

The measurements and measurement requirements applicable for MDT in RRC_INACTIVE are the same as specified for MDT in RRC_IDLE in clause 4.3C.2.

5.3C.3 Requirements for Relative Time Stamp Accuracy

The requirements for relative time stamp accuracy applicable for MDT in RRC_INACTIVE are the same as specified for MDT in RRC_IDLE in clause 4.3C.3.

5.3C.4 Requirements for Relative Time Stamp Accuracy for RRC Connection Establishment Failure Log Reporting

The requirements for relative time stamp accuracy for RRC connection establishment failure applicable for MDT in RRC_INACTIVE are the same as specified for MDT in RRC_IDLE in clause 4.3C.4.

5.3C.5 Requirements for Relative Time Stamp Accuracy for Radio Link Failure and Handover Failure Log Reporting

The requirements for relative time stamp accuracy for RRC link failure and handover failure applicable for MDT in RRC_INACTIVE are the same as specified for MDT in RRC_IDLE in clause 4.3C.5.

5.3C.6 Requirements for Relative Time Stamp Accuracy for RRC Resume Failure Log Reporting

The requirements for relative time stamp accuracy for RRC resume failure applicable for MDT in RRC_INACTIVE are the same as specified for MDT in RRC_IDLE in clause 4.3C.4.

5.4 Idle Mode CA/DC Measurements

5.4.1 Introduction

A UE supporting *IdleInactiveMeasurements-r16* or *idleInactiveEUTRA-MeasReport-r16* shall perform the idle mode measurement on the inter-frequency CA and DC candidate frequencies/cells and E-UTRAN inter-RAT DC candidate frequencies/cells indicated by higher layers and meet the requirement specified in this clause. The UE shall perform idle mode measurements provided that the serving cell support early measurement and is within the validity area. The idle mode measurement requirements apply to a configured carrier frequency and the serving cell are among the supported band combination of the UE.

5.4.2 Measurement Requirements

The requirements in clause 4.4.2 shall apply.

5.4.2.1 Detected cell requirement during state transition and Idle mode

The requirements in clause 4.4.2.1 shall apply.

5.4.2.2 Measurements of inter-frequency CA/DC candidate cells

The requirements in clause 4.4.2.2 shall apply.

5.4.2.3 Measurements on serving cell

The requirements in clause 4.4.2.3 shall apply.

5.4.2.4 Measurements on E-UTRAN inter-RAT DC candidate cells

The requirements in clause 4.4.2.4 shall apply.

5.5 Configured Grant based Small Data Transmissions (CG-SDT)

5.5.1 Introduction

The requirements in this clause are applicable when the UE is configured with timing alignment (TA) validation using *cg-SDT-RSRP-ChangeThreshold* for transmitting in uplink using CG-SDT as specified in [TS 38.331].

5.5.2 Requirements on UE synchronization for small data transmissions

The requirements in this clause are applicable for the UE performing small data tranmissions using configured resources as [TS 38.331].

The UE is allowed to transmit using the configured uplink resources provided that the UE is synchronized towards (i.e. using the timing derived using the latest available N_{TA} value as specified in subclause 7.1.2) the serving cell prior to transmission. If the UE is not able to obtain the synchronization towards the serving cell then the UE shall drop the small data transmission. The UE determines the small data transmission occasion according to the received CG-SDT configuration [TS 38.331].

5.5.3 TA validation requirements

When *cg-SDT-RSRP-ChangeThreshold* [TS 38.331] is configured for TA validation based on the RSRP change criterion according to clause 5.8.2.x in [TS 38.321], the UE is allowed to transmit using CG-SDT using the timing derived using the latest available N_{TA} value as specified in subclause 7.1 provided that

- the first RSRP ($RSRP_1$) measurement and the second RSRP ($RSRP_2$) measurements used in the TA validation are valid measurements and,
- timing alignment validation for transmission using CG-SDT is valid according to the validation criteria in clause 5.8.2 in [TS 38.321].

$RSRP_1$ and $RSRP_2$ are considered valid provided that the conditions in Table 5.5.3-1 and Table 5.5.3-2 are met for FR1 and FR2-1.

Table 5.5.3-1 Valid measurement for FR1

Measurement	FR1
$RSRP_1$	$(T1 - \min(640ms, M1*T_{DRX})) \le T1' \le (T1 + \min(640ms, M1*T_{DRX}))$
$RSRP_2$	$(T2 - \min(640ms, M1*T_{DRX})) \le T2' \le T2$

Table 5.5.3-2 Valid measurement for FR2-1

Measurement	FR2-1
$RSRP_1$	$(T1 - \max(480ms, 8*\text{SMTC periodicity})) \le T1' \le (T1 + \max(480ms, 8*\text{SMTC periodicity}))$
$RSRP_2$	$(T2 - \max(480ms, 8*\text{SMTC periodicity})) \le T2' \le T2$

If at least one of $RSRP_1$ and $RSRP_2$ is considered to be invalid based on the above conditions, then the UE shall not validate the CG-SDT using $RSRP_1$ and $RSRP_2$ and shall not transmit using CG-SDT. Additionally, for the initial CG-SDT transmission, the UE shall not transmit in an CG-SDT occasion that occurs more than 640 ms after T2.

Where:

- T1 is the time when
  - *RRCRelease* with CG-SDT configuration (TS 38.331 [2]) is received

- the latest TA is received if TA is received while in RRC_INACITVE state.

- T1' is the time when the UE has completed $RSRP_1$.

- T2 is the time when the UE performs TA validation as defined in clause 5.27.2 in (TS 38.321 [7]) for transmission using CG-SDT.

- T2' is the time when the UE has completed $RSRP_2$.

- T_{DRX} is the DRX cycle length in ms.

- M1 the scaling factor as defined in clause 4.2.2.2.

5.5.4 Scheduling restriction

5.5.4.1 Scheduling availability of UE performing measurements in TDD bands on FR1

When the UE performs intra-frequency measurements in a TDD band, the following restrictions apply due to SS-RSRP measurement

- The UE is not expected to transmit PUCCH/PUSCH/SRS on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration.

When the UE performs intra-frequency measurements in a TDD band, the following restrictions apply due to SS-RSRQ measurement

- The UE is not expected to transmit PUCCH/PUSCH/SRS on SSB symbols to be measured, RSSI measurement symbols, and on 1 data symbol before each consecutive SSB to be measured/RSSI symbols and 1 data symbol after each consecutive SSB to be measured/RSSI symbols within SMTC window duration.

5.5.4.2 Scheduling availability of UE performing measurements with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UE which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to SS-RSRP/RSRQ measurement

- If *deriveSSB_IndexFromCell* is enabled the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration.

- If *deriveSSB_IndexFromCell* is not enabled the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH on all symbols within SMTC window duration.

For UEs which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to measurement of serving cell.

- The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/ on SSB symbols of the serving cell.

5.5.4.3 Scheduling availability of UE performing measurements on FR2

The following scheduling restriction applies due to SS-RSRP measurement on an FR2 intra-frequency cell

- The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration (The signaling *deriveSSB_IndexFromCell* is always enabled for FR2).

The following scheduling restriction applies to SS-RSRQ measurement on an FR2 intra-frequency cell

- The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/ on SSB symbols to be measured, RSSI measurement symbols, and on 1 data symbol before each consecutive SSB to be measured/RSSI symbols and 1 data symbol after each consecutive SSB to be measured/RSSI symbols within SMTC window duration (The signaling *deriveSSB_IndexFromCellc* is always enabled for FR2).

The following scheduling restriction applies to measurement on an FR2 serving cell

- The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/ on SSB symbols of the serving cell.

5.5.5 Applicability conditions for SDT

The UE is not required to meet the following measurement requirements during subsequent SDT transmissions:

- Measurements of inter-frequency NR cells in clause 5.1.2.4
- Measurements of inter-RAT E-UTRAN cells in clause 5.1.2.5
- Idle Mode CA/DC Measurements in clause 5.4

The UE is allowed to delay the reception of PRS resources on the positioning frequency layer until the SDT session is completed if the measurement using PRS resource overlaps with the SDT resources.

5.6 NR measurements for positioning

5.6.1 Introduction

This clause contains requirements for UE capable of performing NR positioning measurements defined in TS 38.215 [4], including RSTD, PRS-RSRP, UE Rx-Tx time difference and PRS-RSRPP, in RRC_INACTIVE state.

The requirements in clauses 5.6.2, 5.6.3, 5.6.4 and 5.6.5 are applicable to PRS resources that do not collide with other DL signals/channels which include SSB, SIB1, CORESET0, MSG2/MSGB, paging and DL SDT. In addition, a UE is not expected to receive PRS resources that collide with a time interval starting at symbol *m* and ending at symbol *m* + N_2, where symbol *m* is the last symbol in which the UE is configured to receive PDCCH and N_2 is defined in clause 6.4 of [26, TS 38.214] for the subcarrier spacing μ of the DL PRS.

If a PRS resource is outside the intitial DL BWP, a PRS resource instance collides with another DL signals/channels if any portion of the other DL signal/channel overlaps with the time interval starting X symbols before the PRS instance and ending X symbols after the PRS instance, taking into account *nr-DL- PRS-ExpectedRSTD-Uncertainty* and *nr-DL-PRS-ExpectedRSTD.* Where X is defined in Table 5.6.1-1.

Table 5.6.1-1: Value of X number of symbols

FR	μ	NR Slot length (ms)	X symbols
FR1	0	1	7
	1	0.5	14
	2	0.25	28
FR2	2	0.25	14
	3	0.125	28
Note 1:	The FR1 value applies if one or both of the serving cell and the positioning frequency layer are in FR1. FR2 value applies both of the serving cell and the positioning frequency layer are in FR2.		

All measurement requirements specified in clauses 5.6.2, 5.6.3, 5.6.4 and 5.6.5 shall apply for any DRX configuration specified in TS 38.331 [2].

The requirements in clauses 5.6.2, 5.6.3, 5.6.4 and 5.6.5 are applicable provided that the cell selection procedure for the selected PLMN defined in TS 38.304 [1] is not triggered during PRS measurement period.

The requirements in clauses 5.6.2, 5.6.3, 5.6.4 and 5.6.5 apply provided that all PRS resources within a PFL are within up to 2 separate windows within $T_{PRS,i}$ for each positioning frequency layer *i* as defined in clauses 5.6.2, 5.6.3, 5.6.4 and 5.6.5, where each window is up to 10ms.

The UE is not required to perform additional SSB measurement for the SSB configured as QCL source of PRS resources.

When the UE is configured with measurement for more than one positioning requests, the measurement period for each request may be longer than measurement period when UE is configured with measurement for single positioning request.

5.6.2 RSTD measurements

5.6.2.1 Introduction

The requirements in clause 5.6.2 shall apply provided the UE has received *NR-DL-TDOA-RequestLocationInformation* message from the LMF via LPP [34] requesting the UE to measure and report DL RSTD measurements defined in TS 38.215 [4].

5.6.2.2 Requirements Applicability

The requirements in clause 5.6.2 apply for periodic and triggered RSTD measurements, provided:

- PRS-RSTD related side conditions given in clause 10.1.23 for FR1 and FR2 are fulfilled, for a corresponding Band.

5.6.2.3 Measurement Capability

The UE PRS RSTD measurement capability in RRC_INACTIVE state is as indicated by the UE in *NR-DL-TDOA-ProvideCapabilities*, according to TS 37.355 [34].

5.6.2.4 Measurement Reporting Requirements

The measurement reporting delay is defined as the time between the moment when the periodic measurement report is triggered and the moment when the UE is ready to transmit the measurement report over the air interface. If the UE supports reporting of NR positioning measurements via SDT, the UE may be able to report the measurements while it remains in RRC_INACTIVE state; otherwise, the UE will transition to RRC_CONNECTED state prior to transmitting the measurement report.

For RSTD measurements performed by the UE in RRC_INACTIVE state, The measurement reporting delay excludes all of the following:

- additional delay caused other LPP signalling on the DCCH,
- delay uncertainty introduced when inserting the measurement report in the TTI of the uplink DCCH, equal to 2 x TTI_{DCCH} where TTI_{DCCH} is the duration of subframe or slot or subslot when the measurement report is transmitted on the PUSCH with subframe or slot or subslot duration,
- any delay caused by unavailability of UL resources to transmit the measurement report,
- any transmission delay needed by SDT,
- the time needed to transition to RRC_CONNECTED state to report the measurements.

The reported RSTD measurement values contained in measurement reports shall be based on the measurement report mapping requirements specified in clauses 10.1.23.3.

The RSTD measurements performed and reported according to this section shall meet the RSTD measurement accuracy requirements in clause 10.1.23, for each measured DL PRS resource.

5.6.2.5 Measurements Period Requirements

After receiving both *NR-TDOA-ProvideAssistanceData* message and *NR-TDOA-RequestLocationInformation* message from the LMF via LPP [34], the UE shall be able to measure multiple (up to the UE capability specified in Clause 5.6.2.3) DL RSTD measurements, defined in TS 38.215 [4], during the measurement period $T_{RSTD,Total}$ defined as:

$$T_{RSTD,Total} = \sum_{i=1}^{L} T_{RSTD,i} + (L-1) * \max(T_{effect,i})$$

Where:

- i is the index of positioning frequency layer,
- L is total number of positioning frequency layers, and
- $T_{effect,i}$ is the periodicity of the PRS RSTD measurement in positioning frequency layer i

$T_{RSTD,i}$ is the measurement period for PRS RSTD measurement in positioning frequency layer *i* as specified below:

$$T_{RSTD,i} = \left(K_{carrier_PRS} * N_{Rx,TEG,i} * N_{RxBeam,i} * \left\lceil \frac{N_{PRS,i}^{slot}}{N'} \right\rceil * \left\lceil \frac{L_{available_PRS,i}}{N} \right\rceil * N_{sample} - 1\right) * T_{effect,i} + T_{last,i} ,$$

Where:

- $N_{RxBeam,i}$ is the UE Rx beam sweeping factor:
  - $N_{RxBeam,i}$ = 1 if positioning frequency layer *i* is in FR1, and if positioning frequency layer *i* is in FR2
    - $N_{RxBeam,i}$ equals to the value as UE reported in *supportedLowerRxBeamSweepingFactor-FR2* if the capability is reported by the UE for the band containing positioning frequency layer i, and LMF indicates *lowerRxBeamSweepingFactor-FR2* in *NR-TDOA-RequestLocationInformation*.
  - $N_{RxBeam,i}$ equals to 8, otherwise.
- $K_{carrier_PRS}$ is a scaling factor for PRS-based NR positioning measurements in RRC_INACTIVE. If the UE supports *parallelPRS-MeasRRC-Inactive-r17*, $K_{carrier_PRS}$ = 1; otherwise,
- If Srxlev ≤ $S_{nonIntraSearchP}$ or Squal ≤ $S_{nonIntraSearchQ}$, $K_{carrier_PRS} = K_{carrier} + 1$, where $K_{carrier}$ is defined in clause 4.2.2.4
- If Srxlev > $S_{nonIntraSearchP}$ and Squal > $S_{nonIntraSearchQ}$, $K_{carrier_PRS} = N_{layers} + 1$, where N_{layers} is defined in clause 4.2.2.7.
- $N_{Rx,TEG,i}$ is the Rx TEG specific scaling factor:
  - $N_{Rx,TEG,i}$ =1 if the UE is not configured by the LMF to measure a PRS resource with multiple Rx TEGs via *measureSameDL-PRS-ResourceWithDifferentRxTEGs-r17* [34].
  - $N_{Rx,TEG,i}$ is defined as follows if the UE is configured by the LMF with *measureSameDL-PRS-ResourceWithDifferentRxTEGs-r17* [34] to perform measurement on same DL PRS resource of a TRP using different Rx TEGs in *NR-DL-TDOA-RequestLocationInformation* [34]:
    - $N_{Rx,TEG,i} = P$, if the UE is not capable of receiving same DL PRS resource simultaneously from multiple Rx TEGs, where P is the number of UE Rx TEGs that the UE is requested by LMF to measure the same DL-PRS Resource of a TRP indicated by *measureSameDL-PRS-ResourceWithDifferentRxTEGs-r17* in [34].
    - $N_{Rx,TEG,i} = \left\lceil \frac{P}{Q} \right\rceil$, if the UE is capable of receiving the same DL PRS resource simultaneously from multiple Rx TEGs, where Q is the number of UE Rx TEGs for measuring the same DL-PRS Resource simultaneously indicated by *measureSameDL-PRS-ResourceWithDifferentRxTEGsSimul-r17* in [34].
- $N_{PRS,i}^{slot}$ is the maximum number of DL PRS resources in positioning frequency layer *i* configured in a slot.
- $L_{available_PRS,i}$ is the time duration of available PRS in positioning frequency layer *i* to be measured $T_{PRS,i}$, and is calculated in the same way as PRS duration K defined in clause 5.1.6.5 of TS 38.214 [26]. For calculation of

$L_{available_PRS,\mathrm{i}}$, only unmuted PRS resources that are not fully overlapped with other higher-priority DL signals/channels are considered.

- N_{sample} is the number of PRS RSTD samples, where
  - N_{sample} = 1 if the UE supports *supportedDL-PRS-ProcessingSamples-RRC-Inactive* [34], and the LMF requests the UE to perform positioning measurements with reduced number of samples, and meets the following conditions:
    - PRS bandwidth is within the initial BWP and
    - Magnitude of difference between the serving cell's SS-RSRP and the neighbor cell's PRS-RSRP is within 6 dB.
  - N_{sample} = 2 if the UE supports *supportedDL-PRS-ProcessingSamples-RRC-Inactive* [34], and the LMF requests the UE to perform positioning measurements with reduced number of samples, and does not meet the following conditions:
    - PRS bandwidth is within the initial BWP and
    - Magnitude of difference between the serving cell's SS-RSRP and the neighbor cell's PRS-RSRP is within 6 dB.
  - N_{sample} = 4 otherwise.
- $T_{last,i}$ is the measurement duration for the last PRS RSTD sample in positioning frequency layer *i*, including the sampling time and processing time, $\mathrm{T_{last,i}} = T_{\mathrm{i}} + T_{available_PRS,\mathrm{i}}$,
- $\mathrm{T_{effect},i}$ is the periodicity of the PRS RSTD measurement in positioning frequency layer i defined as:

$$T_{\mathrm{effect,i}} = \left\lceil \frac{T_{\mathrm{i}}}{T_{available_PRS,\mathrm{i}}} \right\rceil * T_{available_PRS,\mathrm{i}}$$

Where:

- T_i corresponds to *durationOfPRS-ProcessingSymbolsInEveryTms-r17* in TS 37.355 [34],
- $T_{available_PRS,\mathrm{i}} = LCM\left(T_{PRS,\mathrm{i}}, T_{DRX}\right)$, the least common multiple between $T_{PRS,\mathrm{i}}$ and the DRX cycle length T_{DRX}
- $T_{PRS,\mathrm{i}}$ is the periodicity of DL PRS resource with muting on positioning frequency layer *i*.

If more than one PRS periodicities are configured in positioning frequency layer *i*, the least common multiple of PRS periodicities $T_{per}^{PRS\ with\ muting}$ among all DL PRS resource sets in the positioning frequency layer is used to derive $T_{PRS,\mathrm{i}}$, where,

- $T_{per}^{PRS\ with\ muting} = N_{muting} * T_{per}^{PRS}$, is the PRS periodicity with muting per PRS resource,
- T_{per}^{PRS} is the periodicity of PRS resource sets given by the higher-layer parameter *DL-PRS-Periodicity*.
- N_{muting} is the scaling factor considering PRS resource muting. $N_{muting} = T_{muting}^{PRS} * L_{muting}$, where
- T_{muting}^{PRS} is the muting repetition factor given by the higher-layer parameter *DL-PRS-MutingBitRepetitionFactor*, and L_{muting} is the size of the bitmap $\{b^1\}$.
- $\{N, T\}$ is the UE capability combination per band for RRC_INACTIVE state where N is a duration of DL PRS symbols in ms corresponding to *durationOfPRS-ProcessingSymbols-r17* in TS 37.355 [34], T (ms) corresponds to *durationOfPRS-ProcessingSymbolsInEveryTms-r17* in TS 37.355 [34], [and T-N (>0) is the time required to process duration N of DL PRS symbols already buffered in memory], for a given maximum bandwidth supported by UE corresponding to *supportedBandwidthPRS* in TS 37.355 [34],
- N' is UE capability for number of DL PRS resources that it can process in a slot [in RRC_INACTIVE state as indicated by *maxNumOfDL-PRS-ResProcessedPerSlot-RRC-Inactive-r17* specified in TS 37.355 [34].

The time $T_{RSTD,Total}$ starts from the first DRX cycle containing the DL PRS resource(s) in the assistance data after both the *NR-TDOA-ProvideAssistanceData* message and *NR-TDOA-RequestLocationInformation* message are delivered from LMF to the UE via LPP [34].

Note: No per-positioning frequency layer requirement is applied in scenarios when multiple positioning frequency layers are configured.

If the DRX cycle is reconfigured during the RSTD measurement period, then the measurement period can be longer.

When PRS-RSRP is configured for DL-TDOA, RSTD and PRS-RSRP are performed over the same measurement period.

The measurement requirements do not apply to any PRS resource that always collides with other higher-priority DL signals/channels, as specified in clause 5.6.1.

Longer RSTD measurement period is expected when there are collisions between PRS resources and other higher-priority DL signals/channels.

If $K_{\text{carrier_PRS}}$ changes for any PFL during the measurement period, the measurement period could be longer.

The measurement requirements do not apply for a PRS resource, if the PRS resource is across two sampling duration of N within duration $L_{available_PRS,i}$.

The measurement requirements do not apply for a PRS resource, if time span of the PRS resource instance (including at least the minimum number of repetitions specified in the accuracy requirements) is greater than UE reported capability N.

The requirements in clause 5.6.2 do not apply if the PRS configuration given by higher layer paramters *NR-DL-PRS-AssistanceData* exceeds any of the UE measurement capabilities given by *NR-DL-PRS-ResourcesCapability* in *NR-DL-TDOA-ProvideCapabilities*, and it is up to UE implementation which PRS resources are measured, subject to UE measurement capabilities.

If cell re-selection occurs while RSTD measurements are being performed, then the UE shall continue and complete the on-going RSTD measurements after the cell selection is completed. The RSTD measurement period can be longer.

If the RRC state transition occurs from RRC_INACTIVE to RRC_CONNECTED state during the RSTD measurement period then the UE shall continue the RSTD measurement in the RRC_CONNECTED state. The RSTD measurement period can be longer.

The UE shall meet the RSTD measurement accuracy requirements in clause 10.1.23.

5.6.3 PRS-RSRP measurements

5.6.3.1 Introduction

The requirements in clause 5.6.3 shall apply provided the UE has received a message from LMF via LPP [34] requesting the UE to measure and report PRS-RSRP measurements defined in TS 38.215 [4]. And the UE is capable of supporting the PRS-RSRP measurement in RRC INACTIVE state.

5.6.3.2 Requirements applicability

The requirements in clause 5.6.3 apply for periodic and triggered PRS-RSRP measurements, provided:

- PRS-RSRP related side conditions given in clause 10.1.24 are met for a corresponding Band.

5.6.3.3 Measurement Capability

UE PRS-RSRP measurement capability is as indicated by the UE in *NR-DL-AoD-ProvideCapabilities* according to TS 37.355 [34].

5.6.3.4 Measurement Reporting Requirements

The measurement reporting delay is defined as the time between the moment when the periodic measurement report is triggered and the moment when the UE is ready to transmit the measurement report over the air interface. If the UE supports reporting of NR positioning measurements via SDT, the UE may be able to report the measurements while it remains in RRC_INACTIVE state; otherwise, the UE will transition to RRC_CONNECTED state prior to transmitting the measurement report.

For PRS-RSRP measurements performed by the UE in RRC_INACTIVE state, the measurement reporting delay excludes all of the following:

- any delay caused other LPP signalling on the DCCH,
- delay uncertainty introduced when inserting the measurement report in the TTI of the uplink DCCH which is equal to 2 x TTI_{DCCH} where TTI_{DCCH} is the duration of subframe or slot or subslot when the measurement report is transmitted on the PUSCH with subframe or slot or subslot duration,
- any delay caused by no UL resources for UE to send the measurement report,
- any transmission delay needed by SDT,
- the time needed to transition to RRC_CONNECTED state to report the measurements.

The reported PRS-RSRP measurement values contained in measurement reports shall be based on the measurement report mapping requirements specified in clauses 10.1.24.

The PRS-RSRP measurement accuracy for all measured PRS resources shall be fulfilled according to the accuracy requriements specified in the clauses 10.1.24.

5.6.3.5 Measurement Period Requirements

When the physical layer receives *NR-DL-AoD-ProvideAssistanceData* message and *NR-DL-AoD-RequestLocationInformation* message from LMF via LPP [34], the UE shall be able to measure multiple (up to the UE capability specified in Clause 5.6.3.3) PRS-RSRP measurements, defined in TS 38.215 [4], from configured PRS resources for configured TRPs on configured positioning frequency layers, within $T_{PRS-RSRP,total}$ ms.

$$T_{PRS-RSRP,\ total} = \sum_{i=1}^{L} T_{PRS-RSRP,i} + (L-1) * \max\left(T_{effect,i}\right)$$

Where:

- i is the index of positioning frequency layer,
- L is total number of positioning frequency layers,
- $T_{effect,i}$ is the periodicity of the PRS-RSRP measurement in positioning frequency layer i.

$$T_{PRS-RSRP,i} = \left(K_{carrier_PRS_i} * N_{RxBeam,i} * \left\lceil \frac{N_{PRS,i}^{slot}}{N'} \right\rceil \left\lceil \frac{L_{available_PRS,i}}{N} \right\rceil * N_{sample} - 1\right) * T_{effect,i} + T_{last}$$

Where:

- $K_{carrier_PRS}$ is a scaling factor for PRS-based NR positioning measurements in RRC_INACTIVE. If the UE supports *parallelPRS-MeasRRC-Inactive-r17*, $K_{carrier_PRS}$= 1. Otherwise,
- If Srxlev ≤ $S_{nonIntraSearchP}$ or Squal ≤ $S_{nonIntraSearchQ}$, $K_{carrier_PRS}$ equals to the sum of $K_{carrier}$ in 4.2.2.4 and one positioning layer.
- If Srxlev > $S_{nonIntraSearchP}$ and Squal > $S_{nonIntraSearchQ}$, $K_{carrier_PRS}$ equals to the sum of N_{layer} in 4.2.2.7 and one positioning layer.
- $N_{RxBeam,i}$ is the scaling factor for Rx beam sweeping:
  - $N_{RxBeam,i}$=1 if positioning frequency layer i is in FR1, and if positioning frequency layer i is in FR2

- $N_{RxBeam,i}$ equals to the value as UE reported in *supportedLowerRxBeamSweepingFactor-FR2* if the capability is reported by the UE for the band containing positioning frequency layer i, and LMF indicates *lowerRxBeamSweepingFactor-FR2* in *NR-TDOA-RequestLocationInformation.*

- $N_{RxBeam,i}$ equals to 8, otherwise.

- $L_{available_PRS,\mathrm{i}}$ is the time duration of available PRS to be measured in the positioning frequency layer i to be measured during $T_{PRS,i}$, and is calculated in the same way as PRS duration K defined in clause 5.1.6.5 of TS 38.214 [26]. For calculation of $L_{available_PRS,\mathrm{i}}$, only unmuted PRS resources that are not fully overlapped with other higher-priority DL signals/channels are considered.

- $\mathrm{N}_{\mathrm{PRS,i}}^{\mathrm{slot}}$ is the maximum number of DL PRS resources of positioning frequency layer i configured in a slot,

- {N, T} is UE capability combination per band where N is a duration of DL PRS symbols in ms corresponding to *durationOfPRS-ProcessingSymbols-r17* in TS 37.355 [34] processed every T ms corresponding to *durationOfPRS-ProcessingSymbolsInEveryTms-r17*in TS 37.355 [34] for a given maximum bandwidth supported by UE corresponding to *supportedBandwidthPRS* in TS 37.355 [34],

- N′ is UE capability for number of DL PRS resources that it can process in a slot as indicated by *maxNumOfDL-PRS-ResProcessedPerSlot-RRC-Inactive-r17* in clause 6.4.3 of TS 37.355 [34],

- N_{sample} is the number of PRS-RSRP measurement samples and

  - N_{sample} = 1, if UE supports *supportedDL-PRS-ProcessingSamples-RRC-Inactive* [34], and the LMF indicates the UE to perform positioning measurements with reduced number of samples by *requestedDL-PRS-ProcessingSamples* [34], and the following conditions are met:

    - PRS bandwidth is within the initial BWP and

    - Magnitude of difference between the serving cell's SS-RSRP and the neighbor cell's PRS-RSRP is within 6 dB.

  - N_{sample} = 2, if UE supports *supportedDL-PRS-ProcessingSamples-RRC-Inactive* [34], and the LMF indicates the UE to perform positioning measurements with reduced number of samples by *requestedDL-PRS-ProcessingSamples* [34], and the following conditions are not met:

    - PRS bandwidth is within the initial BWP and

    - Magnitude of difference between the serving cell's SS-RSRP and the neighbor cell's PRS-RSRP is within 6 dB.

  - N_{sample} = 4 otherwise

- $T_{last} = T_i + T_{available_PRS,i}$ is the measurement duration for the last PRS-RSRP sample, including the sampling time and processing time,

  - $\mathrm{T}_{\mathrm{effect,i}} = \left\lceil \frac{T_i}{T_{available_PRS,i}} \right\rceil * T_{available_PRS,i}$ is the periodicity of PRS-RSRP measurement in positioning frequency layer *i*,

  - T_{i} corresponds to *durationOfPRS-ProcessingSymbolsInEveryTms-r17* in TS 37.355 [34],

  - $T_{available_PRS,\mathrm{i}} = LCM(T_{PRS,\mathrm{i}}, T_{DRX})$ is the least common multiple between $T_{PRS,\mathrm{i}}$ and T_{DRX},

  - $\mathrm{T}_{\mathrm{PRS,i}}$ is the maximum PRS resource periodicity among all PRS resources in positioning frequency layer i,

  - T_{DRX} is the DRX cycle length.

If positioning frequency layer *i* has more than one DL PRS resource set with different PRS periodicities with muting, $T_{per}^{PRS\ with\ muting} = N_{muting} * T_{per}^{PRS}$, the least common multiple of $T_{per}^{PRS\ with\ muting}$ among the DL PRS resource sets is used to derive $\mathrm{T}_{\mathrm{PRS,i}}$, where:

- T_{per}^{PRS} is the periodicity of PRS resource sets given by the higher-layer parameter *DL-PRS-Periodicity*.

- N_{muting} is the scaling factor considering PRS resource muting. $N_{muting} = T_{muting}^{PRS} * L_{muting}$, where T_{muting}^{PRS} is the muting repetition factor given by the higher-layer parameter *DL-PRS-MutingBitRepetitionFactor*, and L_{muting} is the size of the bitmap $\{b^1\}$.

When PRS-RSRP measurements are configured for DL-AoD, the time $T_{PRS-RSRP,total}$ starts from the first DRX cycle containing the DL PRS resources in the assistance data after both the *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message from LMF via LPP [34] are delivered to the physical layer of UE.

Note: No per-positioning frequency layer requirement is applied in scenarios when multiple positioning frequency layers are configured.

When the PRS-RSRP measurement is configured together with RSTD measurement then the PRS-RSRP measurement shall meet the RSTD measurement requirements defined in clause 5.6.2.

When the PRS-RSRP measurement is configured together with UE Rx-Tx time difference measurement then the PRS-RSRP measurement shall meet the UE Rx-Tx time difference measurement requirements defined in clause 5.6.4.

The measurement requirements do not apply for a PRS resource:

- if the PRS resource is across two sampling duration of N within duration $L_{available_PRS,i}$ or

- if time span of the PRS resource instance (including at least the minimum number of repetitions specified in the accuracy requirements) is greater than UE reported capability N.

Longer PRS-RSRP measurement period is expected when there is collision/overlap between other DL signals/channels and PRS resources in RRC_INACTIVE state.

The requirements in clause 5.6.3 do not apply if the PRS configuration given by higher layer paramters *NR-DL-PRS-AssistanceData* exceeds any of the UE measurement capabilities given by *NR-DL-PRS-ResourcesCapability* in *NR-DL-AoD-ProvideCapabilities*, and it is up to UE implementation which PRS resources are measured, subject to UE measurement capabilities.

If the DRX cycle is reconfigured during the PRS-RSRP measurement period then the PRS-RSRP measurement period can be longer.

If cell reselection occurs while PRS-RSRPP measurement is being performed, then the UE shall continue and complete the on-going PRS-RSRP measurement after the cell selection is completed. The PRS-RSRP measurement period can be longer.

If the UE's RRC state changes from the RRC_INACTIVE to RRC_CONNECTED during the PRS-RSRP measurement period, then the UE shall continue the PRS-RSRP measurement in the RRC_CONNECTED state. The PRS-RSRP measurement period can be longer.

The UE shall meet the PRS-RSRP measurement accuracy requirements in clause 10.1.X.

5.6.4 UE Rx-Tx time difference measurements

5.6.4.1 Introduction

The requirements in this clause shall apply, provided the UE has received *nr-Multi-RTT-RequestLocationInformation* message from LMF via LPP [34] requesting the UE to measure and report one or more UE Rx-Tx time difference measurements defined in TS 38.215 [4].

5.6.4.2 Requirements Applicability

The requirements in clause 5.6.4 apply for periodic and triggered UE Rx-Tx time difference measurements, provided:

- UE Rx-Tx time difference measurement related side conditions given in clause 10.1.25 are met for a corresponding band.

- SRS is configured on the PCell.

5.6.4.3 Measurement Capability

UE Rx-Tx time difference measurement capability is as indicated by the UE in *NR-Multi-RTT-ProvideCapabilities*, according to TS 37.355 [34].

5.6.4.4 Measurement Reporting Requirements

The measurement reporting delay is defined as the time between the moment the measurement report is triggered and the moment when the UE starts to transmit the measurement report over the air interface.

This measurement reporting delay excludes the delay caused by any of the following:

- delay caused by other LPP signalling on the DCCH.
- delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: 2 x TTI_{DCCH} where TTI_{DCCH} is the duration of subframe or slot or subslot when the measurement report is transmitted on the PUSCH with subframe or slot or subslot duration.
- delay caused due to lack of UL resources for UE to send the measurement report.
- delay required by SDT for reporting the measurement using SDT resouces.
- delay required for transition to RRC_CONNECTED state for report the measurement in RRC_CONNECTED.

The UE Rx-Tx time difference measurement values contained in measurement reports shall be based on the measurement report mapping requirements specified in clause 10.1.X.

The UE Rx-Tx time difference measurement accuracy for all measured DL PRS resources shall be fulfilled according to the accuracy requirements specified in clause 10.1.X.

5.6.4.5 Measurement Period Requirements

When physical layer receives last of *NR-Multi-RTT-ProvideAssistanceData* message and *NR-Multi-RTT-RequestLocationInformation* message from LMF via LPP [34], UE shall be able to measure multiple (up to the UE capability specified in clause 5.6.4.3) UE Rx-Tx time difference measurements as defined in TS 38.215 [4] in configured positioning frequency layers within the measurement period $T_{UERxTx,Total}$ ms.

$$T_{UERxTx,\ Total} = \sum_{i=1}^{L} T_{UERxTx,i} + (L-1) * \max\left(T_{effect,i}\right)$$

Where:

- i is the index of positioning frequency layer,
- $T_{UERxTx,i}$ is the measurement period for UE Rx-Tx time difference measurements in positioning frequency layer i as further defined in this clause,
- L is total number of positioning frequency layers,
- $T_{effect,i}$ is the periodicity of the UE Rx-Tx time difference measurement in positioning frequency layer i as defined further in this clause.

$$T_{UERxTx,i} = \left(K_{carrier_PRS} * N_{RxTx,TEG,i} * N_{RxBeam,i} * \left\lceil \frac{N_{PRS,i}^{slot}}{N'} \right\rceil \left\lceil \frac{L_{available_PRS,i}}{N} \right\rceil * N_{sample} - 1\right) * T_{effect,i} + T_{last,i}$$

Where:

- $K_{carrier_{PRS}}$ =1 if the UE is capable of *parallelPRS-MeasRRC-Inactive-r17* defined in [34].
- $K_{carrier_PRS} = N_{layer} + 1$ if the UE is not capable of *parallelPRS-MeasRRC-Inactive-r17* defined in [34] and if Srxlev > $S_{nonIntraSearchP}$ and Squal > $S_{nonIntraSearchQ}$; where N_{layer} is defined in clause 4.2.2.7.
- $K_{carrier_PRS} = K_{carrier} + 1$ if the UE is not capable of *parallelPRS-MeasRRC-Inactive-r17* defined in [34] and if Srxlev ≤ $S_{nonIntraSearchP}$ or Squal ≤ $S_{nonIntraSearchQ}$; where $K_{carrier}$ is defined in clause 4.2.2.4.

- $N_{RxBeam,i}$ is the scaling factor for UE Rx beam sweeping:
  - $N_{RxBeam,i}$=1 if positioning frequency layer *i* is in FR1, and if positioning frequency layer *i* is in FR2.
    - $N_{RxBeam,i}$ equals to the value as UE reported in *supportedLowerRxBeamSweepingFactor-FR2* if the capability is reported by the UE for the band containing positioning frequency layer i, and LMF indicates *lowerRxBeamSweepingFactor-FR2* in *NR-Multi-RTT -RequestLocationInformation*.
    - $N_{RxBeam,i}$ equals to 8, otherwise.

  $N_{RxTx,TEG,i}$ is the Rx TEG specific scaling factor:
    - $N_{RxTx,TEG,i}$ = 1 if UE is not configured by LMF with measureSameDL-PRS-ResourceWithDifferentRxTxTEGs-r17 [34].
    - $N_{RxTx,TEG,i}$ = measureSameDL-PRS-ResourceWithDifferentRxTxTEGs-r17 if UE is configured by LMF to measurement same DL PRS with multiple UE RxTx TEGs [34].
- $L_{available_PRS,i}$ is the time duration of available PRS resources in the positioning frequency layer *i*, to be measured during $T_{PRS,i}$, and is calculated in the same way as PRS duration K defined in clause 5.1.6.5 of TS 38.214 [26]. For calculation of $L_{available_PRS,i}$, only unmuted PRS resources that are not fully overlapped with other higher-priority DL signals/channels are considered.
- $N_{PRS,i}^{slot}$ is the maximum number of DL PRS resources of positioning frequency layer i configured in a slot,
- {N, T} is UE capability combination per band where N is a duration of DL PRS symbols in ms corresponding to *durationOfPRS-ProcessingSymbols-r17* in TS 37.355 [34] processed every T ms corresponding to *durationOfPRS-ProcessingSymbolsInEveryTms-r17* in TS 37.355 [34] for a given maximum bandwidth supported by UE corresponding to *supportedBandwidthPRS* in clause 4.2.7.2 of TS 37.355 [34],
- N' is UE capability for number of DL PRS resources that it can process in a slot corresponding to *maxNumOfDL-PRS-ResProcessedPerSlot-RRC-Inactive-r17* as specified in clause 6.4.3 of TS 37.355 [34],
- N_{sample} is the number of UE Rx-Tx time difference measurement samples:
  - N_{sample} = 4 if the UE is not capable of *supportedDL-PRS-ProcessingSamples-RRC-Inactive* defined in [34] or not configured to perform positioning measurements with reduced number of samples by *requestedDL-PRS-ProcessingSamples* [34].
  - N_{sample} = 1 if the UE is capable of *supportedDL-PRS-ProcessingSamples-RRC-Inactive* defined in [34] and LMF requests the UE to perform positioning measurements with reduced number of samples by *requestedDL-PRS-ProcessingSamples* [34] and the following conditions are met:
    - PRS bandwidth is within the initial BWP and
    - Magnitude of difference between the serving cell's SS-RSRP and the neighbor cell's PRS-RSRP is within 6 dB.
  - N_{sample} = 2 if the UE is capable of *supportedDL-PRS-ProcessingSamples-RRC-Inactive* defined in [34] and the LMF requests the UE to perform positioning measurements with reduced number of samples by *requestedDL-PRS-ProcessingSamples* [34] but the following conditions are not met:
    - PRS bandwidth is within the initial BWP and
    - Magnitude of difference between the serving cell's SS-RSRP and the neighbor cell's PRS-RSRP is within 6 dB.
  - $T_{last,i}$ is the measurement duration for the last UE Rx-Tx time difference measurement sample in the positioning layer i, including the sampling time and processing time, $T_{last,i} = T_i + T_{available_PRS,i}$,
- $T_{effect,i}$ is periodicity of UE Rx-Tx time difference measurement in positioning frequency layer *i*:

$$T_{effect,i} = \left\lceil \frac{T_i}{T_{available_PRS,i}} \right\rceil * T_{available_PRS,i}$$

Where:

- T_i corresponds to *durationOfPRS-ProcessingSymbolsInEveryTms-r17* in TS 37.355 [34],
- $T_{available_PRS,i} = LCM(T_{PRS,i}, T_{DRX})$, the least common multiple between $T_{PRS,i}$ and T_{DRX}.
- T_{DRX} is the DRX cycle of the UE in the serving cell.
- $T_{PRS,i}$ is the PRS resource periodicity in positioning frequency layer *i*. If the positioning frequency layer *i* has more than one DL PRS resource sets with different PRS periodicities with muting, $T_{per}^{PRS\ with\ muting} = N_{muting} * T_{per}^{PRS}$, the least common multiple of $T_{per}^{PRS\ with\ muting}$ among DL PRS resource sets is used to derive $T_{PRS,i}$, where:
  - T_{per}^{PRS} is the periodicity of PRS resource sets given by the higher-layer parameter *DL-PRS-Periodicity*.
  - N_{muting} is the scaling factor considering PRS resource muting. $N_{muting} = T_{muting}^{PRS} * L_{muting}$, where T_{muting}^{PRS} is the muting repetition factor given by the higher-layer parameter *DL-PRS-MutingBitRepetitionFactor*, and L_{muting} is the size of the bitmap $\{b^1\}$

The time $T_{UERxTx,Total}$ starts from the first DRX cycle containing the DL PRS resources in the assistance data after both the *NR-Multi-RTT-RequestLocationInformation* message and *NR-Multi-RTT-ProvideAssistanceData* message from LMF via LPP [34] are delivered to the physical layer of UE.

Note: No per-positioning frequency layer requirement is applied in scenarios when multiple positioning frequency layers are configured.

If the RRC state transion occurs from RRC_INACTIVE to RRC_CONNECTED state during the UE Rx-Tx time difference measurement period then the UE shall restart the UE Rx-Tx time difference measurement after it obtains SRS configuration and Timing Advance command from the serving cell.

If cell reselection occurs during the UE Rx-Tx time difference measurement period then the UE shall restart the UE Rx-Tx time difference measurement after it obtains SRS configuration and Timing Advance command from the new serving cell.

The measurement requirements do not apply for a PRS resource:

- if the PRS resource is across two sampling duration of N within duration $L_{available_PRS,i}$ or
- if time span of the PRS resource instance (including at least the minimum number of repetitions specified in the accuracy requirements) is greater than UE reported capability N.

If the DRX cycle is reconfigured during the UE Rx-Tx time difference measurement period then the UE Rx-Tx time difference measurement period can be longer.

If during UE Rx-Tx time difference measurement period PRS resources overlap with other DL signals/channels then the UE Rx-Tx time difference measurement period can be longer.

When PRS-RSRP is configured for multi-RTT, the UE Rx-Tx time difference measurements and PRS-RSRP measurements are performed over the same measurement period.

The requirements in clause 5.6.4 do not apply if the PRS configuration given by higher layer paramters *NR-DL-PRS-AssistanceData* exceeds any of the UE measurement capabilities given by *NR-DL-PRS-ResourcesCapability* in *NR-Multi-RTT-ProvideCapabilities*, and it is up to UE implementation which PRS resources are measured, subject to UE measurement capabilities.

If UE uplink transmission timing changes due to the network-configured Timing Advance command during the UE Rx-Tx measurement period, then the UE Rx-Tx time difference measurement period is restarted after uplink transmission timing changes, and the UE Rx-Tx time difference measurement period requirements in this clause shall not apply.

If UE uplink transmission timing changes due to the change in the N_{TA_offset} defined in Table 7.1.2-2 during the UE Rx-Tx measurement period, then the UE Rx-Tx time difference measurement period is restarted after uplink transmission timing changes, and the UE Rx-Tx time difference measurement period requirements in this clause shall not apply.

The UE shall meet the UE Rx-Tx time difference measurement accuracy requirements in clause 10.1.25.

5.6.5 PRS-RSRPP measurements

5.6.5.1 Introduction

The requirements in clause 5.6.5 shall apply provided the UE has received a message from LMF via LPP requesting the UE to measure and report PRS-RSRPP measurements defined in TS 38.215 [4]. And the UE is capable of supporting the PRS-RSRPP measurement in RRC INACTIVE state.

5.6.5.2 Requirements applicability

The requirements in clause 5.6.5 apply for periodic and triggered PRS-RSRPP measurements, provided:

- PRS-RSRPP related side conditions given in clause 10.1.x are met for a corresponding Band.

5.6.5.3 Measurement capability

UE PRS-RSRPP measurement capability is as indicated by the UE in *NR-DL-AoD-ProvideCapabilities* according to TS 37.355 [34].

5.6.5.4 Measurement reporting requirements

The measurement reporting delay is defined as the time between the moment when the periodic measurement report is triggered and the moment when the UE is ready to transmit the measurement report over the air interface. If the UE supports reporting of NR positioning measurements via SDT, the UE may be able to report the measurements while it remains in RRC_INACTIVE state; otherwise, the UE will transition to RRC_CONNECTED state prior to transmitting the measurement report.

For PRS-RSRPP measurements performed by the UE in RRC_INACTIVE state, the measurement reporting delay excludes all of the following:

- any delay caused other LPP signalling on the DCCH,
- delay uncertainty introduced when inserting the measurement report in the TTI of the uplink DCCH which is equal to 2 x TTI_{DCCH} where TTI_{DCCH} is the duration of subframe or slot or subslot when the measurement report is transmitted on the PUSCH with subframe or slot or subslot duration,
- any delay caused by no UL resources for UE to send the measurement report,
- any transmission delay needed by SDT,
- the time needed to transition to RRC_CONNECTED state to report the measurements.

T The reported PRS-RSRPP measurement values contained in measurement reports shall be based on the measurement report mapping requirements specified in clauses 10.1.x.

The PRS-RSRPP measurement accuracy for all measured PRS resources shall be fulfilled according to the accuracy requriements specified in the clauses 10.1.x.

5.6.5.5 Measurement period requirements

When the physical layer receives *NR-DL-AoD-ProvideAssistanceData* message and *NR-DL-AoD-RequestLocationInformation* message in RRC_INACTIVE state, measurement period requirements for PRS-RSRP defined in 5.6.3 is re-used for PRS-RSRPP measurement.

5.7 Random access based Small Data Transmissions (RA-SDT)

5.7.1 Introduction

The requirements in this clause are applicable for the UE performing small data transmissions using 2-step RA or 4-step RA procedures [3].

5.7.2 Requirements for small data transmissions based on 2-step RA

The requirements in clause 6.2.2.3 shall apply.

5.7.3 Requirements for small data transmissions based on 4-step RA

The requirements in clause 6.2.2.2 shall apply.

6 RRC_CONNECTED state mobility

6.1 Handover

6.1.1 NR Handover

6.1.1.1 Introduction

The purpose of NR handover is to change the NR PCell to another NR cell. The requirements in this clause are applicable to SA NR, NE-DC and NR-DC.

6.1.1.2 NR FR1 - NR FR1 Handover

The requirements in this clause are applicable to both intra-frequency and inter-frequency handovers from NR FR1 cell to NR FR1 cell, and to inter-frequency handover from NR FR1 cell in a carrier frequency with CCA to NR FR1 cell.

6.1.1.2.1 Handover delay

When the UE receives a RRC message implying handover the UE shall be ready to start the transmission of the new uplink PRACH channel within $D_{handover}$ msec from the end of the last TTI containing the RRC command.

Where:

$D_{handover}$ equals the applicable RRC procedure delay defined in clause 12 in TS 38.331 [2] plus the interruption time stated in clause 6.1.1.2.2.

6.1.1.2.2 Interruption time

The interruption time is the time between end of the last TTI containing the RRC command on the old PDSCH and the time the UE starts transmission of the new PRACH, excluding the RRC procedure delay.

When intra-frequency or inter-frequency handover is commanded, the interruption time shall be less than $T_{interrupt}$

$$T_{interrupt} = T_{search} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin} \text{ ms}$$

Where:

T_{search} is the time required to search the target cell when the target cell is not already known when the handover command is received by the UE. If the target cell is known, then T_{search} = 0 ms. If the target cell is an unknown intra-frequency cell and the target cell Es/Iot≥-2 dB, then T_{search} = T_{rs} ms. If the target cell is an unknown inter-frequency cell and the target cell Es/Iot≥-2 dB, then T_{search} = 3* T_{rs} ms. Regardless of whether DRX is in use by the UE, T_{search} shall still be based on non-DRX target cell search times.

T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell. T_{Δ} = T_{rs} for both known and unknown target cell.

$T_{processing}$ is time for UE processing. $T_{processing}$ can be up to 20ms.

T_{margin} is time for SSB post-processing. T_{margin} can be up to 2ms.

T_{IU} is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell. T_{IU} can be up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [3].

T_{rs} is the SMTC periodicity of the target NR cell if the UE has been provided with an SMTC configuration for the target cellin the handover command, otherwise Trs is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the measObjectNRs having the same SSB frequency and subcarrier spacing configured by MN and SN have different SMTC, Trs is the periodicity of one of the SMTC which is up to UE implementation. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with T_{rs}=5ms assuming the SSB transmission periodicity is 5ms. There is no requirement if the SSB transmission periodicity is not 5ms. If the UE has been provided with higher layer in TS 38.331 [2] signaling of *smtc2* prior to the handover command, T_{rs} follows *smtc1* or *smtc2* according to the physical cell ID of the target cell.

In the interruption requirement a cell is known if it has been meeting the relevant cell identification requirement during the last 5 seconds otherwise it is unknown. Relevant cell identification requirements are described in Clause 9.2.5 for intra-frequency handover and Clause 9.3.4 for inter-frequency handover.

6.1.1.3 NR FR2- NR FR1 Handover

The requirements in this clause are applicable to inter-frequency handovers from NR FR2 cell to NR FR1 cell.

6.1.1.3.1 Handover delay

When the UE receives a RRC message implying handover the UE shall be ready to start the transmission of the new uplink PRACH channel within $D_{handover}$ ms from the end of the last TTI containing the RRC command.

Where:

$D_{handover}$ equals the applicable RRC procedure delay defined in clause 12 in TS 38.331 [2] plus the interruption time stated in clause 6.1.1.3.2.

6.1.1.3.2 Interruption time

The interruption time is the time between the end of the last TTI containing the RRC command on the old PDSCH and the time the UE starts transmission of the new PRACH, excluding the RRC procedure delay.

When inter-frequency handover is commanded, the interruption time shall be less than $T_{interrupt}$

$$T_{interrupt} = T_{search} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin} \text{ ms}$$

Where:

T_{search} is the time required to search the target cell when the target cell is not already known when the handover command is received by the UE. If the target cell is known, then T_{search} = 0 ms. If the target cell is an unknown inter-frequency cell and the target cell Es/Iot ≥ -2 dB, then T_{search} = 3* T_{rs} ms. Regardless of whether DRX is in use by the UE, T_{search} shall still be based on non-DRX target cell search times.

T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell. T_{Δ} = T_{rs} for both known and unknown target cell.

$T_{processing}$ is time for UE processing. $T_{processing}$ can be up to 40ms.

T_{margin} is time for SSB post-processing. T_{margin} can be up to 2ms.

T_{IU} is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell. T_{IU} can be up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [3].

T_{rs} is the SMTC periodicity of the target NR cell if the UE has been provided with an SMTC configuration for the target cell in the handover command, otherwise T_{rs} is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If such measObjectNRs configured by MN and SN have different SMTC, T_{rs} is the periodicity of one of the SMTC which is up to UE implementation. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with T_{rs}=5ms assuming the SSB transmission periodicity is 5ms. There is no requirement if the SSB transmission periodicity is not 5ms.

In the interruption requirement a cell is known if it has been meeting the relevant cell identification requirement during the last 5 seconds otherwise it is unknown. Relevant cell identification requirements are described in Clause 9.2.5 for intra-frequency handover and Clause 9.3.4 for inter-frequency handover.

6.1.1.4 NR FR2- NR FR2 Handover

The requirements in this clause are applicable to both intra-frequency and inter-frequency handovers from NR FR2 cell to NR FR2 cell.

6.1.1.4.1 Handover delay

When the UE receives a RRC message implying handover the UE shall be ready to start the transmission of the new uplink PRACH channel within $D_{handover}$ ms from the end of the last TTI containing the RRC command.

Where:

$D_{handover}$ equals the applicable RRC procedure delay defined in clause 12 in TS 38.331 [2] plus the interruption time stated in clause 6.1.1.4.2.

6.1.1.4.2 Interruption time

The interruption time is the time between end of the last TTI containing the RRC command on the old PDSCH and the time the UE starts transmission of the new PRACH, excluding the RRC procedure delay.

When intra-frequency or inter-frequency handover is commanded, the interruption time shall be less than $T_{interrupt}$

$$T_{interrupt} = T_{search} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin} \text{ ms}$$

Where:

T_{search} is the time required to search the target cell when the handover command is received by the UE. If the target cell is a known cell, then T_{search} = 0 ms. If the target cell is an unknown intra-frequency cell and the target cell Es/Iot≥-2 dB, then T_{search} = N* T_{rs} ms. If the target cell is an unknown inter-frequency cell and the target cell Es/Iot≥-2 dB, then T_{search} = N*3* T_{rs} ms. N = 8 when the target cell is in FR2-1, and N = 12 when the target cell is in FR2-2. Regardless of whether DRX is in use by the UE, T_{search} shall still be based on non-DRX target cell search times.

$T_{processing}$ is time for UE processing. $T_{processing}$ can be up to 20ms.

T_{margin} is time for SSB post-processing. T_{margin} can be up to 2ms.

T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell. T_{Δ} = T_{rs} for both known and unknown target cell.

T_{IU} is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell. T_{IU} can be up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [3].

T_{rs} is the SMTC periodicity of the target NR cell if the UE has been provided with an SMTC configuration for the target cell in the handover command, otherwise Trs is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If such measObjectNRs configured by MN and SN have different SMTC, Trs is the periodicity of one of the SMTC which is up to UE implementation. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with T_{rs}=5ms assuming the SSB transmission periodicity is 5ms. There is no requirement if the SSB transmission periodicity is not 5ms. If the UE has been provided with higher layer in TS 38.331 [2] signaling of *smtc2* prior to the handover command, T_{rs} follows *smtc1* or *smtc2* according to the physical cell ID of the target cell.

In FR2, the target cell is known if it has been meeting the following conditions:

- During the last 5 seconds before the reception of the handover command:
  - the UE has sent a valid measurement report for the target cell and
  - One of the SSBs measured from the NR target cell being configured remains detectable according to the cell identification conditions specified in clause 9.3,
- One of the SSBs measured from the target cell also remains detectable during the handover delay according to the cell identification conditions specified in clause 9.3.

otherwise it is unknown.

6.1.1.5 NR FR1- NR FR2 Handover

The requirements in this clause are applicable to inter-frequency handovers from NR FR1 cell to NR FR2 cell.

6.1.1.5.1 Handover delay

When the UE receives a RRC message implying handover the UE shall be ready to start the transmission of the new uplink PRACH channel within $D_{handover}$ ms from the end of the last TTI containing the RRC command.

Where:

$D_{handover}$ equals the applicable RRC procedure delay defined in clause 12 in TS 38.331 [2] plus the interruption time stated in clause 6.1.1.5.2.

6.1.1.5.2 Interruption time

The interruption time is the time between end of the last TTI containing the RRC command on the old PDSCH and the time the UE starts transmission of the new PRACH, excluding the RRC procedure delay.

When in inter-frequency handover is commanded, the interruption time shall be less than $T_{interrupt}$

$$T_{interrupt} = T_{search} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin} \text{ ms}$$

Where:

T_{search} is the time required to search the target cell when the handover command is received by the UE. If the target cell is a known cell, then T_{search} = 0 ms. If the target cell is an unknown inter-frequency cell and the target cell Es/Iot≥-2 dB, then T_{search} = N*3* T_{rs} ms. N = 8 when the target cell is in FR2-1, and N = 12 when the target cell is in FR2-2. Regardless of whether DRX is in use by the UE, T_{search} shall still be based on non-DRX target cell search times.

$T_{processing}$ is time for UE processing. $T_{processing}$ can be up 40ms.

T_{margin} is time for SSB post-processing. T_{margin} can be up to 2ms.

T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell. T_{Δ} = T_{rs} for both known and unknown target cell.

T_{IU} is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell. T_{IU} can be up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [3].

T_{rs} is the SMTC periodicity of the target NR cell if the UE has been provided with an SMTC configuration for the target cell in the handover command, otherwise Trs is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If such measObjectNRs configured by MN and SN have different SMTC, Trs is the periodicity of one of the SMTC which is up to UE implementation. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with T_{rs}=5ms assuming the SSB transmission periodicity is 5ms. There is no requirement if the SSB transmission periodicity is not 5ms.

In FR2, the target cell is known if it has been meeting the following conditions:

- During the last 5 seconds before the reception of the handover command:
  - the UE has sent a valid measurement report for the target cell and
  - One of the SSBs measured from the NR target cell being configured remains detectable according to the cell identification conditions specified in clause 9.3,
- One of the SSBs measured from the target cell also remains detectable during the handover delay according to the cell identification conditions specified in clause 9.3.

otherwise it is unknown.

6.1.2 NR Handover to other RATs

6.1.2.1 NR – E-UTRAN Handover

6.1.2.1.1 Introduction

The purpose of inter-RAT handover from NR to E-UTRAN is to change the radio access mode of PCell from NR to E-UTRAN. The handover procedure is initiated from NR with a RRC message that implies a handover as described in TS 38.331 [2]. The requirements in this clause are applicable to SA NR, NE-DC and NR-DC, and to handover from SA NR cell in a carrier frequency with CCA to E-UTRAN.

6.1.2.1.2 Handover delay

When the UE receives a RRC message implying handover to E-UTRAN the UE shall be ready to start the transmission of the uplink PRACH channel in E-UTRA within $D_{handover}$ ms from the end of the last TTI containing the RRC command. $D_{handover}$ is defined as

$$D_{handover} = T_{RRC_procedure_delay} + T_{interrupt}$$

Where:

$T_{RRC_procedure_delay}$: it is the RRC procedure delay, which is 50ms

$T_{interrupt}$: it is the time between end of the last TTI containing the RRC command on the NR PDSCH and the time the UE starts transmission of the PRACH in E-UTRAN, excluding $T_{RRC_procedure_delay}$. $T_{interrupt}$ is defined in clause 6.1.2.1.3.

6.1.2.1.3 Interruption time

When the inter-RAT handover to E-UTRAN is commanded, the interruption time shall be less than $T_{interrupt}$

$$T_{interrupt} = T_{search} + T_{IU} + 20 \text{ ms}$$

Where:

T_{search} is the time required to search the target cell when the target cell is not already known when the handover command is received by the UE. If the target cell is known, then T_{search} = 0 ms. If the target cell is unknown and signal quality is sufficient for successful cell detection on the first attempt, then T_{search} = 80 ms. Regardless of whether DRX is in use by the UE, T_{search} shall still be based on non-DRX target cell search times.

T_{IU} is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell. T_{IU} can be up to 30 ms.

NOTE: The actual value of T_{IU} shall depend upon the PRACH configuration used in the target cell.

In the interruption requirement a cell is known if it has been meeting the relevant cell identification requirement during the last 5 seconds otherwise it is unknown. Relevant E-UTRAN cell identification requirements are described in clause 9.4.1.

6.1.2.2 NR – UTRAN Handover

6.1.2.2.1 Introduction

The purpose of inter-RAT handover from NR to UTRAN is to change the radio access mode from NR to UTRAN. The handover procedure is initiated from NR with a RRC message that implies a hard handover as described in TS 38.331 [2].

6.1.2.2.2 Handover delay

When the UE receives a RRC message implying handover to UTRAN the UE shall be ready to start the transmission of the new UTRA uplink DPCCH within $D_{handover}$ msfrom the end of the last NR TTI containing the RRC *MobilityfromNRCommand* command.

where:

- $D_{handover}$ equals the RRC procedure delay, which is 50 ms plus the interruption time stated in clause 6.1.2.2.3.

6.1.2.2.3 Interruption time

The interruption time is the time between the end of the last TTI containing the RRC command on the NR PDSCH and the time the UE starts transmission on the uplink DPCCH in UTRAN, excluding the RRC procedure delay. The interruption time depends on whether the target cell is known to the UE or not.

The target cell is known if it has been measured by the UE during the last 5 seconds otherwise it is unknown. The UE shall always perform a UTRA synchronisation procedure as part of the handover procedure.

If the target cell is known the interruption time shall be less than $T_{interrupt1}$

$$T_{interrupt1} = T_{IU}+T_{sync}+50+ 10*F_{max} + T_{MC} \text{ ms}$$

If the target cell is unknown the interruption time shall be less than $T_{interrupt2}$

$$T_{interrupt2} = T_{IU}+T_{sync}+150 + 10*F_{max} + T_{MC} \text{ ms}$$

This requirement shall be met, provided that there is one target cell in the *MobilityfromNRCommand* command. Performance requirements for E-UTRA to UTRA soft handover are not specified. When UE is connected to an NR cell, UTRA SFN timing measurements are not reported. This implies that the timing of the DPCH of the UTRA target cells in the active set cannot be configured by UTRAN to guarantee that all target cells fall within the UE reception window of T_0 +/- 148 chips.

Where:

- T_{IU} is the interruption uncertainty when changing the timing from the NR to the new UTRAN cell. T_{IU} can be up to one UTRA frame (10 ms).

- F_{max} denotes the maximum number of radio frames within the transmission time intervals of all transport channels that are multiplexed into the same CCTrCH on the UTRA target cell. If HS-PDSCH is configured in the UTRA target cell, F_{max} is 4 radio frames.

- T_{sync} is the time required for measuring the downlink DPCCH channel as stated in TS 25.214 [32], clause 4.3.1.2. In case higher layers indicate the usage of a post-verification period T_{sync}=0 ms. Otherwise T_{sync}=40 ms.

- T_{MC} is 0ms if a single UTRA cell is configured as the handover target, otherwise 20ms if handover to UTRA with 1, 2 or 3 UTRA carriers with secondary HS-PDSCH is configured.

The phase reference is the primary CPICH.

The requirements in this clause assume that N312 has the smallest possible value i.e. only one insync is required.

6.1.3 NR DAPS Handover

6.1.3.1 Introduction

The requirements in this clause are applicable to DAPS handover to change the NR PCell to another NR cell.

Note: requirements only apply if

- the UE indicates 'no-gap' via *intraFreq-needForGap* for intra-frequency measurement of source cell and intra-frequency measurement of target cell, or
- the SSB of source cell is completely contained in the active DL BWP of the source cell, and the SSB of target cell is completely contained in the active DL BWP of the target cell, or
- the initial DL and UL BWP of source cell is confined within the active DL and UL BWP of the source cell respectively, and the initial DL and UL BWP of target cell is confined within the active DL and UL BWP of the target cell respectively.

6.1.3.2 NR FR1 - NR FR1 DAPS Handover

The requirements in this clause are applicable to both intra-frequency and inter-frequency handovers from NR FR1 cell to NR FR1 cell. A DAPS handover is intra-frequency if the centre frequency of the SSB of the source cell and the centre frequency of the SSB of the target cell are the same, and the subcarrier spacing of the two SSBs are also the same.

Note: For intra-frequency DAPS handover, no requirement applies if active DL and UL BWP of target cell is not confined within the active DL and UL BWP of the source cell respectively.

Note: For inter-frequency DAPS handover, no requirement applies if the BWP of target cell is overlaped with the BWP of source cell in frequency domain.

An FR1 DAPS handover is synchronous if it meets the conditions in table 6.1.3.2-1, otherwise it is asynchronous

Table 6.1.3.2-1: Sync conditions for FR1 DAPS handover

Type of handover	Maximum receive timing difference between source and target cell (μs) for sync DAPS handover	Maximum transmit timing difference between source and target cell (μs) for sync DAPS handover
Intra-frequency Note 1,2,3	6μs	7.6 μs
Intra-band inter-frequency Note 1,2,3	6μs	7.6 μs
Inter-band inter-frequency	33 μs	34.6 μs
Note 1: For synchonous DAPS handover, if the receive time difference exceeds the cyclic prefix length of that SCS, demodulation performance degradation is expected for the first symbol of the slot. For asynchronous DAPS handover, if the receive time difference exceeds the cyclic prefix length of that SCS, interruptions may occur depending on UE implementation. The duration and frequency of occurrence of such interruptions is not specified. Note 2: For DAPS handover on a TDD band, after starting RACH procedure, a UE is not required to transmit in the uplink to any of source and target cells earlier than N_{RX-TX} after the end of the last received downlink symbol from any of source and target cells in the same TDD band where N_{RX-TX}=25600Tc. Note 3: For DAPS handover on a TDD band, after starting RACH procedure, a UE is not required to receive in the downlink from any of source and target cells earlier than N_{TX-RX} after the end of the last transmitted uplink symbol to any of source and target cells in the same TDD band where N_{TX-RX}=25600Tc.		

6.1.3.2.1 DAPS handover delay

Procedure delays for the procedure that can command a DAPS handover are specified in TS 38.331 [2].

When the UE receives a RRC message implying handover, the UE shall be ready to start the transmission of the new uplink PRACH channel within $D_{handover1}$ seconds from the end of the last TTI containing the RRC command when UE is configured with dual active protocol stack handover.

$$D_{handover1} = T_{RRC_procedure} + T_{search} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin} \text{ ms}$$

Where:

$T_{RRC_procedure}$ is the maximum RRC procedure delay as specified in clause 12 in TS 38.331 [2].

T_{search}, T_{IU}, $T_{processing}$, T_{Δ} and T_{margin} are defined in clause 6.1.1.2.2.

After successful RACH procedure of the target cell, when the UE receives an RRC message implying source cell release command, the UE shall accomplish the release actions specified in TS 38.331 [2] within $D_{handover2}$.

$D_{handover2} = T_{RRC_procedure} + T_{interrupt2}$

Where:

$T_{RRC_procedure}$ is the RRC procedure delay as specified in clause 12 in TS 38.331 [2].

$T_{interrupt2}$ is defined in clause 6.1.3.2.2.

6.1.3.2.2 Interruption time

During $D_{handover1}$, the UE is allowed an interruption of up to $T_{interrupt1}$ on source cell.

For FR1-to-FR1 intra-frequency handover, $T_{interrupt1}$ is specified in Table 6.1.3.2.2-1.

Table 6.1.3.2.2-1: $T_{interrupt1}$ for FR1-to-FR1 intra-frequency DAPS HO

μ	NR Slot length (ms)	Interruption length $T_{interrupt1}$ (slots[Note 1]), synchronous DAPS HO	Interruption length $T_{interrupt1}$ (slots[Note 1]), asynchronous DAPS HO
0	1	1	2
1	0.5	2	3
2	0.25	4	5
Note 1: The same SCS of source cell and target cell is assumed. Note 2: It is assumed that the BWP of target cell is not larger than the BWP of source cell. It is assumed that the CBW of target cell is not larger than the CBW of source cell Note 3: Void			

For FR1-to-FR1 intra-band inter-frequency handover, $T_{interrupt1}$ is specified in Table 6.1.3.2.2-2.

Table 6.1.3.2.2-2: $T_{interrupt1}$ for FR1-to-FR1 intra-band inter-frequency DAPS HO

μ	NR Slot length (ms)	$T_{interrupt1}$ (slots[Note 1]), synchronous DAPS HO	$T_{interrupt1}$ (slots[Note 1]), asynchronous DAPS HO
0	1	$1 + T_{SMTC_duration} * N_{slot}^{subframe,\mu}$	$2+ T_{SMTC_duration} * N_{slot}^{subframe,\mu}$
1	0.5	$2 + T_{SMTC_duration} * N_{slot}^{subframe,\mu}$	$3+ T_{SMTC_duration} * N_{slot}^{subframe,\mu}$
2	0.25	$4 + T_{SMTC_duration} * N_{slot}^{subframe,\mu}$	$5+ T_{SMTC_duration} * N_{slot}^{subframe,\mu}$
Note 1: The same SCS of source cell and target cell is assumed. Note 2: $T_{SMTC_duration}$ measured in subframes is the longest SMTC duration between source cell and target cell. Note 3: Void Note 4: $N_{slot}^{subframe,\mu}$ is as defined in TS 38.211 [6].			

For FR1-to-FR1 inter-band handover, $T_{interrupt1}$ is specified in Table 6.1.3.2.2-3.

Table 6.1.3.2.2-3: $T_{interrupt1}$ for FR1-to-FR1 inter-band DAPS HO

μ	NR Slot length (ms) of source cell	$T_{interrupt1}$ (slots)	
		Sync	Async
0	1	1	2
1	0.5	2	3
2	0.25	5	5

For FR1-to-FR1 intra-frequency handover, $T_{interrupt2}$ is specified in Table 6.1.3.2.2-4 when the BWP of target cell is smaller than the BWP of source cell, and $T_{interrupt2}$ is specified in Table 6.1.3.2.2-5 when the same BWP is used for target cell and source cell.

Table 6.1.3.2.2-4: $T_{interrupt2}$ for FR1-to-FR1 intra-frequency DAPS HO

μ	NR Slot length (ms)	Interruption length X (slots[Note 1])	$T_{interrupt2}$ (slots[Note 1]) for asynchronous DAPS HO
0	1	2	3
1	0.5	4	5
2	0.25	8	9
Note 1: The same SCS of source cell and target cell is assumed. Note 2: It is assumed that the BWP of target cell is smaller than the BWP of source cell.			

Table 6.1.3.2.2-5: $T_{interrupt2}$ for FR1-to-FR1 intra-frequency DAPS HO

μ	NR Slot length (ms)	Interruption length X (slots[Note 1])	$T_{interrupt2}$ (slots[Note 1]) for asynchronous DAPS HO
0	1	1	2
1	0.5	2	3
2	0.25	4	5
Note 1: The same SCS of source cell and target cell is assumed. Note 2: It is assumed that the BWP of target cell is the same as the BWP of source cell. Note 3: Void			

For FR1-to-FR1 intra-band inter-frequency handover, $T_{interrupt2}$ is specified in Table 6.1.3.2.2-6.

Table 6.1.3.2.2-6: $T_{interrupt2}$ for FR1-to-FR1 intra-band inter-frequency DAPS HO

μ	NR Slot length (ms)	$T_{interrupt2}$ (slots[Note 1]) for synchronous DAPS HO	$T_{interrupt2}$ (slots[Note 1]) for asynchronous DAPS HO
0	1	1 + $T_{SMTC_duration}$ * $N_{slot}^{subframe,\mu}$	2+ $T_{SMTC_duration}$ * $N_{slot}^{subframe,\mu}$
1	0.5	2 + $T_{SMTC_duration}$ * $N_{slot}^{subframe,\mu}$	3+ $T_{SMTC_duration}$ * $N_{slot}^{subframe,\mu}$
2	0.25	4 + $T_{SMTC_duration}$ * $N_{slot}^{subframe,\mu}$	5+ $T_{SMTC_duration}$ * $N_{slot}^{subframe,\mu}$
Note 1: The same SCS of source cell and target cell is assumed. Note 2: $T_{SMTC_duration}$ measured in subframes is the longest SMTC duration between source cell and target cell. Note 3: Void. Note 4: $N_{slot}^{subframe,\mu}$ is as defined in TS 38.211 [6].			

For FR1-to-FR1 inter-band handover, $T_{interrupt2}$ is specified in Table 6.1.3.2.2-7.

Table 6.1.3.2.2-7: $T_{interrupt2}$ for FR1-to-FR1 inter-band DAPS HO

μ	NR slot length (ms) of target cell	$T_{interrupt2}$ (slots)	
		Sync	Async
0	1	1	2

1	0.5	2	3
2	0.25	5	5

6.1.3.3 NR FR2- NR FR1 DAPS Handover

The requirements in this clause are applicable to inter-frequency handovers from NR FR2 cell to NR FR1 cell.

An FR2-FR1 DAPS handover is synchronous if it meets the conditions in table 6.1.3.3-1, otherwise it is asynchronous

Table 6.1.3.3-1: Sync condition for FR2-FR1 DAPS handover

Frequency Range of the pair of carriers	Maximum receive timing difference between source and taget cell (μs) for sync DAPS handover	Maximum transmit timing difference between source and taget cell (μs) for sync DAPS handover
Between FR1 and FR2	25	26.1

6.1.3.3.1 DAPS handover delay

Procedure delays for the procedure that can command a DAPS handover are specified in TS 38.331 [2].

When the UE receives a RRC message implying handover, the UE shall be ready to start the transmission of the new uplink PRACH channel within $D_{handover1}$ ms from the end of the last TTI containing the RRC command when UE is configured with dual active protocol stack handover.

$$D_{handover1} = T_{RRC_procedure} + T_{search} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin} \text{ ms}$$

Where:

$T_{RRC_procedure}$ is the maximum RRC procedure delay as specified in clause 12 in TS 38.331 [2].

T_{search}, T_{IU}, $T_{processing}$, T_{Δ} and T_{margin} are defined in clause 6.1.1.3.2.

After successful RACH procedure of the target cell, when the UE receives an RRC message implying source cell release command, the UE shall accomplish the release actions specified in TS 38.331 [2] within $D_{handover2}$.

$$D_{handover2} = T_{RRC_procedure} + T_{interrupt2}$$

Where:

$T_{RRC_procedure}$ is the RRC procedure delay as specified in clause 12 in TS 38.331 [2].

$T_{interrupt2}$ is defined in clause 6.1.3.3.2.

6.1.3.3.2 Interruption time

During $D_{handover1}$, the UE is allowed an interruption of up to $T_{interrupt1}$ on source cell.

For FR2-to-FR1 inter-band handover, $T_{interrupt1}$ is specified in Table 6.1.3.3.2-1.

Table 6.1.3.3.2-1: $T_{interrupt1}$ for FR2-to-FR1 inter-band DAPS HO

μ	NR slot length (ms) of source cell	$T_{interrupt1}$ (slots)	
		Sync	Async
2	0.25	5	5
3	0.125	9	9

During $D_{handover2}$, the UE is allowed an interruption of up to $T_{interrupt2}$ on target cell.

For FR2-to-FR1 inter-band handover, $T_{interrupt2}$ is specified in Table 6.1.3.3.2-2.

Table 6.1.3.3.2-2: $T_{interrupt2}$ for FR2-to-FR1 inter-band DAPS HO

μ	NR slot length (ms) of target cell	$T_{interrupt2}$ (slots)	
		Sync	Async
0	1	1	2
1	0.5	2	3
2	0.25	5	5

6.1.3.4 NR FR1- NR FR2 DAPS Handover

The requirements in this clause are applicable to inter-frequency handovers from NR FR1 cell to NR FR2 cell.

An FR1-FR2 DAPS handover is synchronous if it meets the conditions in table 6.1.3.4-1, otherwise it is asynchronous

Table 6.1.3.4-1, : Sync condition for FR1-FR2 DAPS handover

Frequency Range of the pair of carriers	Maximum receive timing difference between source and taget cell (μs) for sync DAPS handover	Maximum transmit timing difference between source and taget cell (μs)Note 1 sync DAPS handover
Between FR1 and FR2	25	26.1

6.1.3.4.1 DAPS handover delay

Procedure delays for the procedure that can command a DAPS handover are specified in TS 38.331 [2].

When the UE receives a RRC message implying handover, the UE shall be ready to start the transmission of the new uplink PRACH channel within $D_{handover1}$ ms from the end of the last TTI containing the RRC command when UE is configured with dual active protocol stack handover.

$$D_{handover1} = T_{RRC_procedure} + T_{search} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin} \text{ ms}$$

Where:

$T_{RRC_procedure}$ is the maximum RRC procedure delay as specified in clause 12 in TS 38.331 [2].

T_{search}, T_{IU}, $T_{processing}$, T_{Δ} and T_{margin} are defined in clause 6.1.1.5.2.

After successful RACH procedure of the target cell, when the UE receives an RRC message implying source cell release command, the UE shall accomplish the release actions specified in TS 38.331 [2] within $D_{handover2}$.

$D_{handover2} = T_{RRC_procedure} + T_{interrupt2}$

Where:

$T_{RRC_procedure}$ is the RRC procedure delay as specified in clause 12 in TS 38.331 [2].

$T_{interrupt2}$ is defined in clause 6.1.3.4.2.

6.1.3.4.2 Interruption time

During $D_{handover1}$, the UE is allowed an interruption of up to $T_{interrupt1}$ on source cell.

For FR1-to-FR2 inter-band handover, $T_{interrupt1}$ is specified in Table 6.1.3.4.2-1.

Table 6.1.3.4.2-1: $T_{interrupt1}$ for FR1-to-FR2 inter-band DAPS HO

μ	NR slot length (ms) of source cell	$T_{interrupt1}$ (slots)	
		Sync	Async
0	1	1	2
1	0.5	2	3

2	0.25	5	5

During $D_{handover2}$, the UE is allowed an interruption of up to $T_{interrupt2}$ on target cell.

For FR1-to-FR2 inter-band handover, $T_{interrupt2}$ is specified in Table 6.1.3.4.2-2.

Table 6.1.3.4.2-2: $T_{interrupt2}$ for FR1-to-FR2 inter-band DAPS HO

μ	NR slot length (ms) of target cell	$T_{interrupt2}$ (slots)	
		Sync	Async
2	0.25	5	5
3	0.125	9	9

6.1.4 NR Conditional Handover

6.1.4.1 Introduction

The requirements in this clause are applicable to conditional handover to change the NR PCell to another NR cell.

6.1.4.2 NR FR1 – NR FR1 conditional handover

The requirements in this clause are applicable to both intra-frequency and inter-frequency conditional handover from NR FR1 cell to NR FR1 cell.

6.1.4.2.1 Handover delay

Procedure delays for all procedures that can command a conditional handover are specified in TS 38.331 [2].

When the UE receives a RRC message implying conditional handover the UE shall be ready to start the transmission of the new uplink PRACH channel within D_{CHO} seconds from the end of the last TTI containing the RRC command.

$$D_{CHO} = T_{RRC} + T_{Event_DU} + T_{measure} + T_{interrupt} + T_{CHO_execution}$$

Where:

T_{RRC} is the RRC procedure delay defined in clause 12 in TS 38.331 [2].

T_{Event_DU} is the delay uncertainty which is the time from when the UE successfully decodes a conditional handover command until a condition exists at the measurement reference point which will trigger the conditional handover.

$T_{measure}$ is the measurements time stated in clause 6.1.4.2.2.

$T_{CHO_execution}$ is the conditional execution preparation time in clause 6.1.4.2.3.

$T_{interrupt}$ is the interruption time stated in clause 6.1.4.2.4.

6.1.4.2.2 Measurement time

The measurement time delay is defined from the end of T_{Event_DU} until UE executes a handover to a target cell and interruption time starts.

For intra-frequency handover, the measurement time delay measured without Time To Trigger (TTT) and L3 filtering shall be less than $T_{identify\ intra\ with\ index}$ or $T_{identify_intra_without_index}$ defined in clause 9.2.5.1 or clause 9.2.6.2.

For inter-frequency handover, the measurement time delay measured without Time To Trigger (TTT) and L3 filtering shall be less than $T_{identify_inter_with_index}$ or $T_{identify_inter_without_index}$ defined in clause 9.3.4.

When TTT or L3 filtering is used an additional delay can be expected.

A cell is detectable only if at least one SSB measured from the cell being configured remains detectable during the time period $T_{identify_intra_without_index}$ or $T_{identify_intra_with_index}$ for intra-frequency handover or $T_{identify_inter_without_index}$ for inter-frequency handover. If a cell which has been detectable at least for the time period $T_{identify_intra_without_index}$ or $T_{identify_intra_with_index}$ for intra-frequency handover or $T_{identify_inter_without_index}$ for inter-frequency handover becomes undetectable for a period and then the cell becomes detectable again and triggers a handover, the measurement time delay shall be less than $T_{SSB_measurement_period_intra}$ or $T_{SSB_measurement_period_inter}$ provided the timing to that cell has not changed more than $\pm 3200/2^{\mu}$ Tc while the measurement gap has not been available and the L3 filter has not been used, where μ is the SCS configuration as defined in clause 4.2 of TS 38.211 [3]. When L3 filtering is used, an additional delay can be expected.

6.1.4.2.3 Preparation time

$T_{CHO_execution}$ is the UE execution preparation time for conditional handover, and starts after UE realizes the condition of CHO is met and identity of the target cell is determined. $T_{CHO_execution}$ can be up to 10ms.

6.1.4.2.4 Interruption time

The interruption time is the time between when the UE starts to execute the conditional handover to the target cell and the time the UE starts transmission of the new PRACH.

For intra-frequency or inter-frequency conditional conditional handover, the interruption time shall be less than

$$T_{interrupt} = T_{processing} + T_{IU} + T_{\Delta} + T_{margin} \text{ ms}$$

Where:

$T_{processing}$ is time for UE processing. $T_{processing}$ can be up to 20ms.

T_{IU} is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell. T_{IU} can be up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [3]

T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell. $T_{\Delta} = T_{rs}$.

T_{margin} is time for SSB post-processing. T_{margin} can be up to 2ms.

T_{rs} is the SMTC periodicity of the target NR cell if the UE has been provided with an SMTC configuration for the target cellin the handover command, otherwise Trs is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with T_{rs}=5ms assuming the SSB transmission periodicity is 5ms. There is no requirement if the SSB transmission periodicity is not 5ms. If the UE has been provided with higher layer in TS 38.331 [2] signaling of *smtc2* prior to the handover command, T_{rs} follows *smtc1* or *smtc2* according to the physical cell ID of the target cell.

NOTE 1: The actual value of T_{IU} shall depend upon the PRACH configuration used in the target cell.

6.1.4.3 NR FR2 – NR FR1 conditional handover

The requirements in this clause are applicable to inter-frequency conditional handover from NR FR2 cell to NR FR1 cell.

The requirements defined in clause 6.1.4.2 applies assuming inter-frequency handover and:

$T_{processing}$ is time for UE processing. $T_{processing}$ can be up to 40ms.

6.1.4.4 NR FR2 – NR FR2 conditional handover

The requirements in this clause are applicable to both intra-frequency and inter-frequency conditional handover from NR FR2 cell to NR FR2 cell.

6.1.4.4.1 Handover delay

Procedure delays for all procedures that can command a conditional handover are specified in TS 38.331 [2].

When the UE receives a RRC message implying conditional handover the UE shall be ready to start the transmission of the new uplink PRACH channel within D_{CHO} seconds from the end of the last TTI containing the RRC command.

$$D_{CHO} = T_{RRC} + T_{Event_DU} + T_{measure} + T_{interrupt} + T_{CHO_execution}$$

Where:

T_{RRC} is the RRC procedure delay defined in clause 12 in TS 38.331 [2].

T_{Event_DU} is the delay uncertainty which is the time from when the UE successfully decodes a conditional handover command until a condition exists at the measurement reference point which will trigger the conditional handover.

$T_{measure}$ is the measurements time stated in clause 6.1.4.4.2.

$T_{CHO_execution}$ is the conditional execution preparation time in clause 6.1.4.4.3. $T_{interrupt}$ is the interruption time stated in clause 6.1.4.4.4.

6.1.4.4.2 Measurement time

The measurement time delay is defined from the end of T_{Event_DU} until UE executes a handover to a target cell and interruption time starts.

For intra-frequency handover, the measurement time delay measured without Time To Trigger (TTT) and L3 filtering shall be less than $T_{identify\ intra\ with\ index}$ or $T_{identify_intra_without_index}$ defined in clause 9.2.5.1 or clause 9.2.6.2.

For inter-frequency handover, the measurement time delay measured without Time To Trigger (TTT) and L3 filtering shall be less than $T_{identify_inter_with_index}$ or $T_{identify_inter_without_index}$ defined in clause 9.3.4.

When TTT or L3 filtering is used an additional delay can be expected.

A cell is detectable only if at least one SSB measured from the cell being configured remains detectable during the time period $T_{identify_intra_without_index}$ or $T_{identify_intra_with_index}$ for intra-frequency handover or $T_{identify_inter_without_index}$ for inter-frequency handover. If a cell which has been detectable at least for the time period $T_{identify_intra_without_index}$ or $T_{identify_intra_with_index}$ for intra-frequency handover or $T_{identify_inter_without_index}$ for inter-frequency handover becomes undetectable for a period and then the cell becomes detectable again and triggers a handover, the measurement time delay shall be less than $T_{SSB_measurement_period_intra}$ or $T_{SSB_measurement_period_inter}$ provided the timing to that cell has not changed more than $\pm 3200/2^{\mu}$ Tc while the measurement gap has not been available and the L3 filter has not been used, where μ is the SCS configuration as defined in clause 4.2 of TS 38.211 [3]. When L3 filtering is used, an additional delay can be expected.

6.1.4.4.3 Preparation time

$T_{CHO_execution}$ is the UE execution preparation time for conditional handover, and starts after UE realizes the condition of CHO is met and identity of the target cell is determined. $T_{CHO_execution}$ can be up 10ms.

6.1.4.4.4 Interruption time

The interruption time is the time between when the UE starts to execute the conditional handover to the target cell and the time the UE starts transmission of the new PRACH.

For intra-frequency or inter-frequency conditional conditional handover, the interruption time shall be less than

$$T_{interrupt} = T_{processing} + T_{IU} + T_{\Delta} + T_{margin}\ \text{ms}$$

Where:

$T_{processing}$ is time for UE processing. $T_{processing}$ can be up to 20ms.

T_{IU} is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell. T_{IU} can be up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [3]

T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell. $T_{\Delta} = T_{rs}$.

T_{margin} is time for SSB post-processing. T_{margin} can be up to 2ms.

T_{rs} is the SMTC periodicity of the target NR cell if the UE has been provided with an SMTC configuration for the target cellin the handover command, otherwise Trs is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with T_{rs}=5ms assuming the SSB transmission periodicity is 5ms. There is no requirement if the SSB transmission periodicity is not 5ms. If the UE has been provided with higher layer in TS 38.331 [2] signaling of *smtc2* prior to the handover command, T_{rs} follows *smtc1* or *smtc2* according to the physical cell ID of the target cell.

NOTE 1: The actual value of T_{IU} shall depend upon the PRACH configuration used in the target cell.

6.1.4.5 NR FR1 – NR FR2 conditional handover

The requirements in this clause are applicable to inter-frequency conditional handover from NR FR1 cell to NR FR2 cell.

The requirements defined in clause 6.1.4.4 applies assuming inter-frequency handover and:

$T_{processing}$ is time for UE processing. $T_{processing}$ can be up to 40ms.

6.1.5 NR Handover with PSCell

6.1.5.1 Introduction

The purpose of NR handover with PSCell is to change the NR PCell to another NR cell or E-UTRA cell and add or change the PSCell along with PCell handover. The requirements in this clause are applicable to:

- Handover with PSCell from NR SA to EN-DC
- Handover with PSCell from NR-DC to NR-DC
  - Requirements in this clause only applies to FR1+FR2 NR-DC
- Handover with PSCell from NE-DC to NE-DC
  - Requirements in this clause only applies to NE-DC with FR1 PCell

6.1.5.2 Handover with PSCell from NR SA to EN-DC

The requirements in this clause are applicable to inter-RAT handover from NR to E-UTRAN and FR1/FR2 PSCell addition.

When the UE receives a RRC message implying handover with PSCell, the UE shall be ready to start the transmission of the new uplink PRACH channel on target E-UTRA PCell within $D_{HOwithPSCell_PCell}$ msec from the end of the last TTI containing the RRC command, and the UE shall be ready to start the transmission of the new uplink PRACH channel on target PSCell within $D_{HOwithPSCell_PSCell}$ msec from the end of the last TTI containing the RRC command.

Where:

- $D_{HOwithPSCell_PCell}$ equals the applicable RRC procedure delay (i.e., 50ms) plus the interruption time stated in clause 6.1.5.2.1.
- $D_{HOwithPSCell_PSCell}$ equals the PSCell addition delay stated in clause 6.1.5.2.2.

6.1.5.2.1 Interruption time for inter-RAT HO from NR to E-UTRAN

The interruption time is the time between end of the last TTI containing the RRC command on the old PDSCH and the time the UE starts transmission of the new PRACH, excluding the RRC procedure delay

When handover with PSCell from NR SA to EN-DC is commanded, the interruption time shall be less than $T_{interrupt}$

$$T_{interrupt} = T_{search_HO} + T_{IU} + T_{processing}$$

Where:

- T_{search_HO} is same as the T_{search} defined in section 6.1.2.1.3.
- T_{IU} is same as the one defined in section 6.1.2.1.3.
- $T_{processing}$ is the SW processing time needed by UE, including RF warm up period. When target PSCell is unknown and SMTC configuration of target unknown PSCell is present in *RRCConnectionReconfiguration* [2], $T_{processing}$ = 30ms if new PSCell is in FR1, $T_{processing}$ = 50ms if new PSCell is in FR2; otherwise, $T_{processing}$ = 25ms if new PSCell is in FR1, $T_{processing}$ = 45ms if new PSCell is in FR2.

In the interruption requirement a cell is known if it has been meeting the relevant cell identification requirement during the last 5 seconds otherwise it is unknown. Relevant E-UTRA cell identification requirements are described in clause 9.4.1.

6.1.5.2.2 PSCell addition in HO with PSCell for NR SA to EN-DC

The requirements in this section shall apply for PSCell addition during handover with PSCell from NR SA to EN-DC.

When handover with PSCell from NR SA to EN-DC is commanded, the PSCell addition time shall be less than $D_{HOwithPSCell_PSCell}$:

- $D_{HOwithPSCell_PSCell} = T_{RRC_delay} + T_{processing} + T_{search_PCell} + T_{search_PSCell} + T_{\Delta} + T_{PSCell_DU} + 2$ ms

Where:

- T_{RRC_delay} is the RRC procedure delay. T_{RRC_delay} = 50ms.
- $T_{processing}$ is as defined in section 6.1.5.2.1.
- T_{search_PCell} is the time for obtaining the timing reference of target PCell. $T_{search_PCell} = T_{search_HO}$ which is as defined in section 6.1.5.2.1 if target PSCell is unknown and SMTC configuration of target unknown PSCell is configured in *RRCConnectionReconfiguration* of *targetRAT-MessageContainer* [2]. Otherwise, $T_{search_PCell} = 0$.
- T_{search_PSCell} is same as T_{search} in section 7.31.2 of TS36.133[15], and T_{Δ} and T_{PSCell_DU} is same as the one defined in section 7.31.2 of TS36.133[15]. The Trs definition from section 7.31.2 of TS36.133[15] is modified as following for requirement in this section:
- Trs is the SMTC periodicity of the target NR cell if target PSCell is unknown and SMTC configuration of target unknown PSCell is present in *RRCConnectionReconfiguration* [2], otherwise Trs is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this section is applied with Trs = 5 ms assuming the SSB transmission periodicity is 5 ms. There is no requirement if the SSB transmission periodicity is not 5 ms.

PSCell known and unknown condition is as defined in section 7.31.2 of TS36.133[15].

6.1.5.3 HO with PSCell from NE-DC to NE-DC

The requirements in this clause are applicable to both intra-frequency and inter-frequency handovers from NR PCell to NR PCell on FR1, and the PSCell addition is on LTE.

6.1.5.3.1 Handover delay

When the UE receives a RRC message implying PCell handover with PSCell change, the UE shall be ready to start the transmission of the new uplink PRACH channel on target NR PCell within $D_{HOwithPSCell_PCell}$ from the end of the last TTI containing the RRC command, and UE shall be ready to start the transmission of the new uplink PRACH channel on target E-UTRA PSCell within $D_{HOwithPSCell_PSCell}$ from the end of the last TTI containing the RRC command.

The PCell handover delay, $D_{HOwithPSCell_PCell}$, is equals the applicable RRC procedure delay defined in clause 12 in TS 38.331 [2] plus the PCell interruption time ($T_{interrupt}$) define in clause 6.1.5.3.2.

PSCell addition/change delay, $D_{HOwithPSCell_PSCell}$ is defined in clause 6.1.5.3.3.

6.1.5.3.2 HO with PSCell - PCell Interruption time

When intra-frequency or inter-frequency handover is commanded, the interruption time shall be less than $T_{interrupt}$

$$T_{interrupt} = T_{search_PCell} + T_{\Delta_PCell} + T_{margin_PCell} + T_{IU_PCell} + T_{processing} \text{ ms}$$

Where:

- If the source cell is in FR1 and target cell is in FR1, T_{search_PCell}, T_{Δ_PCell}, T_{margin_PCell} is same as the T_{search}, T_{Δ}, T_{margin} defined in section 6.1.1.2.2 respectively. $T_{processing}$ is UE software processing and RF warmup delay for PCell HO and for this case $T_{processing}$ can be up to 25ms. T_{IU_PCell} can be up to the summation of SSB to PRACH occasion association period and 10 ms if there is no collision between PCell RACH and PSCell RACH occasion or UE can perform PCell RACH and PSCell RACH occasion simaltaneously as defined in TS38.213[39] section 7.6.1A; otherwise, longer T_{IU_PCell} is expected to include the uncertainty in acquiring the next available RACH occasion for PCell RACH transmission.

6.1.5.3.3 PSCell addition/change in NE-DC to NE-DC HO with PSCell

When HO with PSCell addition is commanded, the PSCell addition/change time shall be less than $D_{HOwithPSCel_PSCell}$.

- $D_{HOwithPSCel_PSCell} = T_{config_EUTRAN\text{-}PSCell} + T_{processing_margin}$.

where

- $T_{config_EUTRAN\text{-}PSCell}$ isdefined in clause8.8.2, and
- $T_{processing_margin}$ = 5ms is the additional delay margin for RF warm-up and software processing in handover with PSCell.

6.1.5.4 HO with PSCell from NR-DC to NR-DC

The requirements in this clause are applicable to handover with PSCell from NR-DC to NR-DC. The requirements in this clause are only applicable to FR1+FR2 NR-DC.

This clause defines requirements for the delay within which the UE shall be able to handover from NR cell to NR cell and add NR PSCell in the meantime.

When the UE receives a RRC message implying handover with PSCell,

- The UE shall be ready to start the transmission of the new uplink PRACH channel of the target PCell within $D_{HOwithPSCell_PCell}$ ms from the end of the last TTI containing the RRC command, and
- The UE shall be capable of transmitting PRACH preamble towards the target PSCell no later than $D_{HOwithPSCell_PSCell}$ ms from the end of the last TTI containing the RRC command.

Where:

- $D_{HOwithPSCell_PCell}$ equals the applicable RRC procedure delay defined in clause 12 in TS 38.331 [2] plus the interruption time stated in clause 6.1.5.4.1.

- $D_{HOwithPSCell_PSCell}$ is the PSCell change delay stated in clause 6.1.5.4.2.

6.1.5.4.1 HO with PSCell – PCell Interruption time

The interruption time is the time between end of the last TTI containing the RRC command on the old PDSCH and the time the UE starts transmission of the new PRACH, excluding the RRC procedure delay.

When handover with PSCell from NR-DC to NR-DC is commanded, the interruption time shall be less than $T_{interrupt}$

$$T_{interrupt} = T_{search} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin} \text{ ms}$$

Where:

- T_{search}, T_{IU}, T_{Δ} and T_{margin} are the same as defined in clause 6.1.1.2.2.

- $T_{processing}$ is the SW processing time needed by UE, including RF warm up period. $T_{processing}$ = 30 ms if SMTC of the target unknown PSCell is configured in *targetcellSMTC-SCG-r16* but not configured in *reconfigurationWithSync*. Otherwise, $T_{processing}$ = 25 ms.

In the interruption requirement a cell is known if it has been meeting the relevant cell identification requirement during the last 5 seconds otherwise it is unknown. Relevant cell identification requirements are described in Clause 9.2.5 for intra-frequency handover and Clause 9.3.4 for inter-frequency handover.

6.1.5.4.2 HO with PSCell – PSCell change delay

The requirements in this section shall apply for PSCell change during handover with PSCell from NR DC to NR-DC.

When handover with PSCell from NR-DC to NR-DC is commanded, the PSCell change time shall be less than $D_{HOwithPSCell_PSCell}$:

- $D_{HOwithPSCell_PSCell} = T_{RRC_delay} + T_{processing} + T_{search_PCell} + T_{search_PSCell} + T_{\Delta} + T_{PSCell_DU} + 2$ ms

Where:

- T_{RRC_delay} $T_{processing}$, T_{search_PSCell}, T_{Δ} and T_{PSCell_DU} are the same as defined in clause 8.9.2.

- $T_{processing}$ is the SW processing time needed by UE, including RF warm up period. $T_{processing}$ = 30 ms if SMTC of the target unknown PSCell is configured in *targetcellSMTC-SCG-r16* but not configured in *reconfigurationWithSync*. Otherwise, $T_{processing}$ = 25 ms.

- T_{search_PCell} is the time for obtaining the timing reference of target PCell. If SMTC of the target unknown PSCell is configured in *targetcellSMTC-SCG-r16* but not configured in *reconfigurationWithSync*, $T_{search_PCell} = T_{search} + T_{\Delta} + T_{margin}$, where T_{search}, T_{Δ} and T_{margin} are specified in clause 6.1.5.4.1. Otherwise, T_{search_PCell} = 0 ms.

The T_{rs} definition from clause 8.9.2 is modified as following for requirements in this section:

- T_{rs} is the SMTC periodicity of the target NR cell if target PSCell is unknown and SMTC configuration of target unknown PSCell is present in either *targetcellSMTC-SCG-r16* or *reconfigurationWithSync*, otherwise Trs is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the measObjectNRs having the same SSB frequency and subcarrier spacing configured by MN and SN have different SMTC, Trs is the periodicity of one of the SMTC which is up to UE implementation. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this section is applied with Trs = 5 ms assuming the SSB transmission periodicity is 5 ms. There is no requirement if the SSB transmission periodicity is not 5 ms.

PSCell known and unknown condition is as defined in clause 8.9.2.

6.1.5.5 Handover with PSCell from NR SA to EN-DC with PSCell using CCA

6.1.5.5.1 Introduction

When the UE receives a RRC message implying handover with PSCell change, the UE shall be ready to start the transmission of the new uplink PRACH channel on target E-UTRA PCell within $D_{HOwithPSCell_PCell}$ ms from the end of the last TTI containing the RRC command, and UE shall be ready to start the transmission of the new uplink PRACH channel on a target PSCell on a carrier frequency with CCA within $D_{HOwithPSCell_PSCell}$ seconds and from the end of the last TTI containing the RRC command.

Where:

$D_{HOwithPSCell_PCell}$ equals the maximum RRC procedure delay defined in clause 11.2 in TS 36.331 [2] plus the interruption time stated in clause 6.1.5.5.2.

$D_{HOwithPSCell_PSCell}$ is the PSCell addition delay stated in clause 6.1.5.5.3

6.1.5.5.2 NR SA to EN-DC HO with PSCell- NR to E-UTRA HO Interruption time

The interruption time is the time between end of the last TTI containing the RRC command on the old PDSCH and the time the UE starts transmission of the new PRACH excluding the RRC procedure delay. This requirement applies when UE is not required to perform any synchronisation procedure before transmitting on the new PRACH or on the new PUSCH.

When Handover with PSCell is commanded, the interruption time shall be less than $T_{interrupt}$

$$T_{interrupt} = T_{search} + T_{IU} + T_{processing} \text{ ms}$$

Where:

T_{search} is same as the T_{search} defined in section 6.1.2.1.3

T_{IU} is same as the one defined in section 6.1.2.1.3.

$T_{processing}$ is the SW processing time needed by UE, including RF warm up period. When target PSCell is unknown and SMTC configuration of target unknown PSCell is present in *RRCConnectionReconfiguration* [2], $T_{processing}$ = 30ms, otherwise, $T_{processing}$ = 25 ms.

NOTE: The actual value of T_{IU} shall depend upon the PRACH configuration used in the target E-UTRA cell.

In the interruption requirement, a cell is known if it has been meeting the relevant cell identification requirement during the last 5 seconds. Otherwise, it is unknown. Relevant E-UTRA cell identification requirements are described in clause 9.4.1.

6.1.5.5.3 NR SA to EN-DC HO with PSCell - NR PSCell Addition Delay requirements

When Handover with PSCell is commanded, the NR PSCell on a carrier frequency with CCA changing delay shall be less than $D_{HOwithPSCell_PSCell}$:

$$D_{HOwithPSCell_PSCell} = T_{RRC_delay} + T_{processing} + T_{search_PCell} + T_{search_PSCell} + T_{\Delta} + T_{IU_PSCell} + 2 \text{ ms}$$

Where:

T_{RRC_delay} is maximum RRC procedure delay defined in clause 11.2 in TS 36.331 [2].

T_{search_PCell} is the time for obtaining the timing reference of target PCell. T_{search_PCell} is same as T_{search_HO} as defined in section 6.1.5.2.1, if target PSCell is unknown and SMTC configuration of target unknown PSCell is present in *RRCConnectionReconfiguration* [2]. Otherwise, T_{search_PCell} = 0

T_{search_PSCell} is the time required to search the target cell when the target cell is not already known when the handover command is received by the UE. If the target cell is known, then T_{search_PSCell} = 0 ms. If the target cell is

an unknown cell and target cell Es/Iot ≥ [-2] dB, then $T_{search_PSCell} = (3+L_1) * T_{rs}$ ms. Regardless of whether DRX is in use by the UE, T_{search} shall still be based on non-DRX target cell search times.

L_1 is the number of SMTC occasions not available at the UE during the inter-RAT detection period. Regardless of whether DRX is in use by the UE, T_{search} shall still be based on non-DRX target cell search times.

T_Δ is same as T_Δ in section 7.31A.2.

$T_{processing}$ is time for UE processing and is same as defined in 6.1.5.5.2.

T_{margin} is time for SSB post-processing. T_{margin} can be up to 2 ms.

T_{IU_PSCell} is the delay uncertainty due to the random-access procedure when sending PRACH to the new cell. T_{IU_PSCell} can be up to: $(1+ L_3) * T_{SSB,RO} + 10$ ms; where $T_{SSB,RO}$ is the SSB to PRACH occasion association period as defined in Table 8.1-1 of TS 38.213 [39] and L_3 is the number of consecutive SSB to PRACH occasion association periods during which no PRACH occasion is available for PRACH transmission due to UL CCA failures or RACH collision between PCell and PSCell. $L_3 = 0$ for Type 2C UL channel access procedure as defined in TS 37.213 [57] and when there are no RACH collisions between PCell and PSCell. When the UE is configured with both the UL BWP with PRACH occasion on the target cell and UL LBT failure detection/recovery, the interruption can be longer.

NOTE 1: The actual value of T_{IU_PSCell} shall depend upon the PRACH configuration used in the target cell.

NOTE 2: The interruption time extended by L_1, L2, and L_3 parameters, and by the UL LBT failure detection/recovery mechanism is limited by the T304 timer. The UE behaviour at the T304 timer expiry is specified in TS 38.331 [38].

Trs is the SMTC periodicity of the target NR cell if target PSCell is unknown and SMTC configuration of target unknown PSCell is present in *RRCConnectionReconfiguration* [2], otherwise Trs is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this section is applied with Trs = 5 ms assuming the SSB transmission periodicity is 5 ms. There is no requirement if the SSB transmission periodicity is not 5 ms.

A cell on a carrier frequency with CCA is known if it has been meeting the relevant cell identification requirement during the last 5 seconds. Otherwise, it is unknown. Relevant cell identification requirements are described in clause 8.1.2.4.21A, and 8.1.2.4.22A.

6.1A Void

6.1A.1 Void

6.1A.1.1 Void

6.1A.1.2 Void

6.1A.1.2.1 Void

6.1A.1.2.2 Void

6.1B Handover to target cell using CCA

6.1B.1 NR Handover

6.1B.1.1 Introduction

The purpose of NR handover to target cell using CCA is to change the NR PCell to a target NR cell in a carrier frequency with CCA. The requirements in this clause are applicable to NR SA.

In the requirements of clause 6.1B.1, the term SMTC occasion not available at the UE refers to when the SMTC contains SSBs configured by gNB in a cell on a carrier frequency subject to CCA, but the first two successive candidate SSB positions for the same SSB index within the discovery burst transmission window are not available at the UE due to DL CCA failures at gNB during the corresponding detection or time tracking period; otherwise the SMTC occasion is considered as available at the UE.

In the requirements of clause 6.1B.1, the term PRACH occasion unavailable for transmission refers to when the PRACH occasion is configured by gNB but not transmitted by the UE during the corresponding period due to UL CCA failure at the UE.

6.1B.1.2 NR FR1 - NR FR1 Handover

The requirements in this clause are applicable to inter-frequency handovers from NR FR1 cell to NR FR1 cell in carrier frequencies with CCA, and to both intra-frequency and inter-frequency handovers from NR FR1 cell in carrier frequencies with CCA to NR FR1 cell in carrier frequencies with CCA.

6.1B.1.2.1 Handover delay

When the UE receives an RRC message implying handover the UE shall be ready to start the transmission of the new uplink PRACH channel within $D_{handover}$ ms from the end of the last TTI containing the RRC command.

Where:

$D_{handover}$ equals the applicable RRC procedure delay to be defined in clause12 in TS 38.331 [2] plus the interruption time stated in clause 6.1B.1.2.2.

6.1B.1.2.2 Interruption time

The interruption time is the time between end of the last TTI containing the RRC command on the old PDSCH and the time the UE starts transmission of the new PRACH, excluding the RRC procedure delay.

When intra-frequency or inter-frequency handover is commanded, the interruption time shall be less than $T_{interrupt}$

$$T_{interrupt} = T_{search} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin} \text{ ms}$$

Where:

T_{search} is the time required to search the target cell when the target cell is not already known when the handover command is received by the UE. If the target cell is known, then T_{search} = 0 ms. If the target cell is an unknown intra-frequency cell and the target cell Es/Iot≥-2 dB, then $T_{search} = (1+L_1) * T_{rs}$. If the target cell is an unknown inter-frequency cell and the target cell Es/Iot≥-2 dB, then $T_{search} = (3+L_1') * T_{rs}$ where L_1 and L_1' are the number of SMTC occasions not available at the UE during the intra-frequency and inter-frequency detection period, respectively. Regardless of whether DRX is in use by the UE, T_{search} shall still be based on non-DRX target cell search times.

T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell. $T_{\Delta} = (1+ L_2) * T_{rs}$ ms, where L_2 is the number of SMTC occasions not available at the UE during the time tracking period.

$T_{processing}$ is time for UE processing. $T_{processing}$ can be up to 20ms.

T_{margin} is time for SSB post-processing. T_{margin} can be up to 2ms.

T_{IU} is the interruption uncertainty due to the random access procedure when sending PRACH to the new cell. T_{IU} can be up to: $(1+ L_3)*T_{SSB,RO} + 10$ ms where $T_{SSB,RO}$ is the SSB to PRACH occasion association period as defined in Table 8.1-1 of TS 38.213 [3] and L_3 is the number of consecutive SSB to PRACH occasion association periods during which no PRACH occasion is available for PRACH transmission due to UL CCA failure. $L_3 = 0$ for Type 2C UL channel access procedure as defined in TS 37.213 [33]. When the UE is configured with both the UL BWP with PRACH occasion on the target cell and UL CCA failure detection/recovery, the interruption can be longer.

T_{rs} is the SMTC periodicity of the target NR cell in a carrier frequency with CCA if the UE has been provided with an SMTC configuration for the target cell in the handover command, otherwise T_{rs} is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with T_{rs}=5ms assuming the SSB transmission periodicity is 5ms. There is no requirement if the SSB transmission periodicity is not 5ms.

NOTE 1: The interruption time considering the potential extensions caused by L_1, L_1´,L_2 , L_3 and by the UL CCA failure detection/recovery mechanism is limited by the T304 timer. The UE behaviour at the T304 timer expiry is detailed in TS 38.331 [2].

In the interruption requirement a cell is known if it has been meeting the relevant cell identification requirement during the last 5 seconds otherwise it is unknown. Relevant cell identification requirements are described in Clause 9.2A.5 for intra-frequency handover and Clause 9.3A.4 for inter-frequency handover to a carrier frequency with CCA.

6.1B.1.3 NR FR2-2 NR FR2-2 Handover

The requirements in this clause are applicable to inter-frequency handovers from NR FR2-2 cell to NR FR2-2 cell in carrier frequencies with CCA, and to both intra-frequency and inter-frequency handovers from NR FR2-2 cell in carrier frequencies with CCA to NR FR2-2 cell in carrier frequencies with CCA.

6.1B.1.3.1 Handover delay

When the UE receives a RRC message implying handover the UE shall be ready to start the transmission of the new uplink PRACH channel within $D_{handover}$ ms from the end of the last TTI containing the RRC command.

Where:

- $D_{handover}$ equals the applicable RRC procedure delay defined in clause 12 in TS 38.331 [2] plus the interruption time stated in clause 6.1B.1.3.2.

6.1B.1.3.2 Interruption time

The interruption time is the time between end of the last TTI containing the RRC command on the old PDSCH and the time the UE starts transmission of the new PRACH, excluding the RRC procedure delay.

When intra-frequency or inter-frequency handover is commanded, the interruption time shall be less than $T_{interrupt}$

$$T_{interrupt} = T_{search} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin} \text{ ms}$$

Where:

- T_{search} is the time required to search the target cell when the handover command is received by the UE. If the target cell is a known cell, then $T_{search} = 0$ ms. If the target cell is an unknown intra-frequency cell and the target cell Es/Iot≥-2 dB, then $T_{search} = (1+L_1) * N * T_{rs}$ ms. If the target cell is an unknown inter-frequency cell and the target cell Es/Iot≥-2 dB, then $T_{search} = (3+L_1´) * N * T_{rs}$ where L_1 and $L_1´$ are the number of SMTC occasion groups not available at the UE during the intra-frequency and inter-frequency detection period, respectively. An SMTC occasion group consists of N consecutive SMTC occasions. An SMTC occasion group is not available, when at least one SMTC occasion in the group is not transmitted by the gNB. N is equal to 12. Regardless of whether DRX is in use by the UE, T_{search} shall still be based on non-DRX target cell search times.

- $T_{processing}$ is time for UE processing. $T_{processing}$ can be up to 20ms.

- T_{margin} is time for SSB post-processing. T_{margin} can be up to 2ms.

- T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell. $T_{\Delta} = (1+ L_2) * T_{rs}$, where L_2 is the number of SMTC occasions not available at the UE during the time tracking period.

- T_{IU} is the interruption uncertainty due to the random access procedure when sending PRACH to the new cell. T_{IU} can be up to $(1+ L_3)*T_{SSB,RO}$ + 10ms, where $T_{SSB,RO}$ is SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [3] and L_3 is the number of consecutive SSB to PRACH occasion association periods during which no PRACH occasion is available for PRACH transmission due to UL CCA failure. $L_3 = 0$ for Type 3 channel access procedure as defined in TS 37.213 [33].

- T_{rs} is the SMTC periodicity of the target NR cell in a carrier frequency with CCA if the UE has been provided with an SMTC configuration for the target cell in the handover command, otherwise Trs is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with T_{rs}=5ms assuming the SSB transmission periodicity is 5ms. There is no requirement if the SSB transmission periodicity is not 5ms.

NOTE 1: The interruption time considering the potential extensions caused by L_1, L_1´,L_2 , L_3 and by the UL CCA failure detection/recovery mechanism is limited by the T304 timer. The UE behaviour at the T304 timer expiry is detailed in TS 38.331 [2].

In FR2-2, the target cell is known if it has been meeting the following conditions:

- During the last 5 seconds before the reception of the handover command:

  - the UE has sent a valid measurement report for the target cell and

  - One of the SSBs measured from the NR target cell being configured remains detectable according to the cell identification conditions specified in Clause 9.2A.5 for intra-frequency handover and Clause 9.3A.4 for inter-frequency handover to a carrier frequency with CCA,

- One of the SSBs measured from the target cell also remains detectable during the handover delay according to the cell identification conditions specified in Clause 9.2A.5 for intra-frequency handover and Clause 9.3A.4 for inter-frequency handover to a carrier frequency with CCA.

otherwise it is unknown.

6.1B.1.4 NR FR1- NR FR2-2 Handover

The requirements in this clause are applicable to inter-frequency handovers from NR FR1 cell to NR FR2-2 cell in carrier frequencies with CCA.

6.1B.1.4.1 Handover delay

When the UE receives a RRC message implying handover the UE shall be ready to start the transmission of the new uplink PRACH channel within $D_{handover}$ ms from the end of the last TTI containing the RRC command.

Where:

$D_{handover}$ equals the applicable RRC procedure delay defined in clause 12 in TS 38.331 [2] plus the interruption time stated in clause 6.1B.1.4.2.

6.1B.1.4.2 Interruption time

The interruption time is the time between end of the last TTI containing the RRC command on the old PDSCH and the time the UE starts transmission of the new PRACH, excluding the RRC procedure delay.

When in inter-frequency handover is commanded, the interruption time shall be less than $T_{interrupt}$

$$T_{interrupt} = T_{search} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin} \text{ ms}$$

Where:

T_{search} is the time required to search the target cell when the handover command is received by the UE. If the target cell is a known cell, then T_{search} = 0 ms. If the target cell is an unknown inter-frequency cell and the target cell Es/Iot≥-2 dB, then $T_{search} = (3+L_1) * N * T_{rs}$, where L_1 is the number of SMTC occasion groups not available at the UE during the inter-frequency detection period. An SMTC occasion group consists of N consecutive SMTC occasions. An SMTC occasion group is not available, when at least one SMTC occasion in

the group is not transmitted by the gNB. N is equal to 12. Regardless of whether DRX is in use by the UE, T_{search} shall still be based on non-DRX target cell search times.

$T_{processing}$ is time for UE processing. $T_{processing}$ can be up 40ms.

T_{margin} is time for SSB post-processing. T_{margin} can be up to 2ms.

T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell. $T_{\Delta} = (1+ L_2) * T_{rs}$, where L_2 is the number of SMTC occasions not available at the UE during the time tracking period.

T_{IU} is the interruption uncertainty due to the random access procedure when sending PRACH to the new cell. T_{IU} can be up to $(1+ L_3)*T_{SSB,RO}$ + 10ms, where $T_{SSB,RO}$ is SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [3] and L_3 is the number of consecutive SSB to PRACH occasion association periods during which no PRACH occasion is available for PRACH transmission due to UL CCA failure. $L_3 = 0$ for Type 3 channel access procedure as defined in TS 37.213 [33].

- T_{rs} is the SMTC periodicity of the target NR cell in a carrier frequency with CCA if the UE has been provided with an SMTC configuration for the target cell in the handover command, otherwise Trs is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with T_{rs}=5ms assuming the SSB transmission periodicity is 5ms. There is no requirement if the SSB transmission periodicity is not 5ms.

NOTE 1: The interruption time considering the potential extensions caused by L_1, L_2 , L_3 and by the UL CCA failure detection/recovery mechanism is limited by the T304 timer. The UE behaviour at the T304 timer expiry is detailed in TS 38.331 [2].

In FR2-2, the target cell is known if it has been meeting the following conditions:

During the last 5 seconds before the reception of the handover command:

- the UE has sent a valid measurement report for the target cell and

  One of the SSBs measured from the NR target cell being configured remains detectable according to the cell identification conditions specified in Clause 9.2A.5 for intra-frequency handover and Clause 9.3A.4 for inter-frequency handover to a carrier frequency with CCA,

- One of the SSBs measured from the target cell also remains detectable during the handover delay according to the cell identification conditions specified in Clause 9.2A.5 for intra-frequency handover and Clause 9.3A.4 for inter-frequency handover to a carrier frequency with CCA.

otherwise it is unknown.

6.1C Handover for SAN

6.1C.1 NR SAN Handover

6.1C.1.1 Introduction

The purpose of NR SAN handover is to change the NR SAN PCell to another NR SAN cell. The requirements in this clause are applicable to SA NR SAN.

6.1C.1.2 NR SAN FR1 – NR SAN FR1 Handover

The requirements in this clause are applicable to both intra-frequency and inter-frequency handovers from NR SAN FR1 cell to NR SAN FR1 cell.

6.1C.1.2.1 Handover delay

When the UE receives a RRC message implying handover to NR SAN cell, the UE shall be ready to start the transmission of the new uplink PRACH channel within $D_{handover}$ msec from the end of the last TTI containing the RRC command.

Where:

- $D_{handover}$ equals the applicable RRC procedure delay defined in clause 12 in TS 38.331 [2] plus the interruption time stated in clause 6.1C.1.2.2.

6.1C.1.2.2 Interruption time

The interruption time is the time between end of the last TTI containing the RRC command on the old PDSCH and the time the UE starts transmission of the new PRACH, excluding the RRC procedure delay.

When intra-frequency or inter-frequency handover to NR SAN cell is commanded,

If the valid parameters of ephemeris information, epoch time of the ephemeris, common TA, validity timer information, DL and UL Polarization information, K_{offset}, and K_{mac} for target NR SAN cell are send to UE,

the interruption time shall be less than $T_{interrupt}$

$$T_{interrupt} = T_{search} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin} \text{ ms}$$

Otherwise, no interruption time requirement is applied.

Where:

- T_{search} is the time required to search the target NR SAN cell when the target cell is not already known when the handover command is received by the UE. If the target cell is known, then T_{search} = 0 ms. If the target cell is an unknown intra-frequency cell and the target cell Es/Iot $\geq$ -2 dB, then $T_{search} = T_{rs}$ ms. If the target cell is an unknown inter-frequency cell and the target cell Es/Iot $\geq$ -2 dB, then $T_{search} = 3* T_{rs}$ ms. Regardless of whether DRX is in use by the UE, T_{search} shall still be based on non-DRX target cell search times.

- T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell. $T_{\Delta} = T_{rs}$.

- $T_{processing}$ is time for UE processing. $T_{processing}$ can be up to 20ms.

- T_{margin} is time for SSB post-processing. T_{margin} can be up to 2ms.

- T_{IU} is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell. T_{IU} can be up to the summation of SSB to PRACH occasion association period and [10] ms. SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [3].

- T_{rs} is the SMTC periodicity of the target NR SAN cell if the UE has been provided with an SMTC configuration for the target cell in the handover command, otherwise T_{rs} is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with T_{rs}=5ms assuming the SSB transmission periodicity is 5ms. There is no requirement if the SSB transmission periodicity is not 5ms. If the UE has been provided with higher layer in TS 38.331 [2] signaling of *smtc2* prior to the handover command, T_{rs} follows *smtc1* or *smtc2* according to the physical cell ID of the target cell.

In the interruption requirement a cell is known if it has been meeting the relevant cell identification requirement during the last 5 seconds otherwise it is unknown. Relevant cell identification requirements are described in Clause 9.2.5 for intra-frequency handover and Clause 9.3.4 for inter-frequency handover.

6.1C.2 NR SAN Conditional Handover

6.1C.2.1 Introduction

The requirements in this clause are applicable to conditional handover to change the NR SAN PCell to another NR SAN cell.

6.1C.2.2 NR SAN FR1 – NR SAN FR1 conditional handover

The requirements in this clause are applicable to both intra-frequency and inter-frequency conditional handover from NR SAN FR1 cell to NR SAN FR1 cell. The requirements in this clause apply provided that UE has the valid and applicable parameters of ephemeris information, common TA, DL and UL Polarization information, K_{offset}, and K_{mac} for target NR SAN cell during D_{CHO}, otherwise the measurement time, preparation time and interruption time may be longer than the requirements in clause 6.1C.2.2.2, 6.1C.2.2.3 and 6.1C.2.2.4.

6.1C.2.2.1 Handover delay

Procedure delays for all procedures that can command a conditional handover are specified in TS 38.331 [2]. UE should start RRM measurement before the time or distance condition is met, the time/distance condition is defined in clause 5.5.4 in TS 38.331[2]

When the UE receives a RRC message implying conditional handover the UE shall be ready to start the transmission of the new uplink PRACH channel within $D_{handover}$ seconds from the end of the last TTI containing the RRC command.

$$D_{CHO} = T_{RRC} + T_{Event_DU} + T_{measure} + T_{interrupt} + T_{CHO_execution}$$

Where:

- T_{RRC} is the RRC procedure delay defined in clause 12 in TS 38.331 [2].
- T_{Event_DU} is the delay uncertainty which is the time from when the UE successfully decodes a conditional handover command until a condition exists at the measurement reference point which will trigger the conditional handover
- $T_{measure}$ is the measurements time stated in clause 6.1C.4.2.2.
- $T_{CHO_execution}$ is the UE conditional execution preparation time for conditional handover in clause 6.C1.2.2.3.
- $T_{interrupt}$ is the interruption time stated in clause 6.1C.2.2.4.

The conditional handover delay requirements are applied if condition T1-2 is later than the end of $T_{measure}$ for time based CHO, or both condition D1-1 and condition D1-2 are fulfilled before the end of $T_{measure}$ for location-based CHO, otherwise no CHO requirement is applied.

6.1C.2.2.2 Measurement time

The measurement time delay is defined from the end of T_{Event_DU} until UE executes a handover to a target cell and interruption time starts.

For intra-frequency handover, the requirements for identifying a new detectable intra frequency cell measured without Time To Trigger (TTT) and L3 filtering, $T_{identify_intra_with_index}$ or $T_{identify_intra_without_index}$, defined in clause 9.2C.5.1 and clause 9.2C.6.2 are used.

For time-based conditional intra-frequency handover:

- If condition T1-1 occurs earlier than $T_{Event_DU} + T_{identify_intra_with_index}$ or $T_{Event_DU} + T_{identify_intra_without_index}$, then the measurement time delay equal to $T_{identify_intra_with_index}$ or $T_{identify_intra_without_index}$ assuming UE only performs the measurements within SMTC window of the target cell.
- If condition T1-1 occurs later than $T_{Event_DU} + T_{identify_intra_with_index}$ or $T_{Event_DU} + T_{identify_intra_without_index}$, then the measurement time delay equals to the time from the end of T_{event_DU} until condition T1-1.

For location-based conditional intra-frequency handover:

- If both condition D1-1 and condition D1-2 are fulfilled earlier than T_{Event_DU} + $T_{identify_intra_with_index}$ or T_{Event_DU} + $T_{identify_intra_without_index}$, then the measurement time delay equal to $T_{identify_intra_with_index}$ or $T_{identify_intra_without_index}$ assuming UE only performs measurements within SMTC window of the target cell.

- If both condition D1-1 and condition D1-2 are fulfilled is later than T_{Event_DU} plus $T_{identify_intra_with_index}$ or $T_{identify_intra_without_index}$ for intra-frequency handover, then the measurement time delay equal to the time from the end of T_{event_DU} until time when both condition D1-1 and condition D1-2 are fulfilled.

For inter-frequency handover, the requirements for identifying a new detectable inter frequency cell measured without Time To Trigger (TTT) and L3 filtering, $T_{identify_inter_with_index}$ or $T_{identify_inter_without_index}$, defined in clause 9.3C.7.1 are used.

For time-based conditional inter-frequency handover:

- If condition T1-1 occurs earlier than T_{Event_DU} + $T_{identify_inter_with_index}$ or T_{Event_DU} + $T_{identify_inter_without_index}$, then the measurement time delay equal to $T_{identify_inter_with_index}$ or $T_{identify_inter_without_index}$ assuming that the UE uses only the SMTC window of the target inter-frequency carrier for performing the measurements. In this case $K_{satellite}$=1, $CSSF_{inter}$=1.

- If condition T1-1 occurs later than T_{Event_DU} + $T_{identify_inter_with_index}$ or T_{Event_DU} + $T_{identify_inter_without_index}$, then the measurement time delay equals to the time from the end of T_{event_DU} until condition T1-1.

For location-based conditional inter-frequency handover,

- If both condition D1-1 and condition D1-2 are fulfilled earlier than T_{Event_DU} + $T_{identify_inter_with_index}$ or T_{Event_DU} + $T_{identify_inter_without_index}$, then the measurement time delay equal to $T_{identify_inter_with_index}$ or $T_{identify_inter_without_index}$, assuming that the UE uses only the SMTC window of the target inter-frequency carrier for performing the measurements. In this case $K_{satellite=}$1, $CSSF_{inter}$=1.

- If both condition D1-1 and condition D1-2 are fulfilled later than T_{Event_DU} plus $T_{identify_inter_with_index}$ or $T_{identify_inter_without_index}$, then the measurement time delay equal to the time from the end of T_{event_DU} until time of both condition D1-1 and condition D1-2 are fulfilled.

When TTT or L3 filtering is used an additional delay can be expected.

A cell is detectable only if at least one SSB measured from the cell being configured remains detectable during the time period [$T_{identify_intra_without_index}$] or [$T_{identify_intra_with_index}$] for intra-frequency handover or [$T_{identify_inter_without_index}$] for inter-frequency handover.

6.1C.2.2.3 Preparation time

$T_{CHO_execution}$ is the UE execution preparation time for conditional handover, and starts after UE realizes the condition of CHO is met and identity of the target cell is determined. $T_{CHO_execution}$ can be up to 10ms.

6.1C.2.2.4 Interruption time

The interruption time is the time between when the UE starts to execute the conditional handover to the target cell and the time the UE starts transmission of the new PRACH.

For intra-frequency or inter-frequency conditional conditional handover, the measurment time shall be less than

$$T_{interrupt} = T_{processing} + T_{IU} + T_{\Delta} + T_{margin} \text{ ms}$$

Where:

- $T_{processing}$ is time for UE processing. $T_{processing}$ can be up to 20ms.

- T_{IU} is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell. T_{IU} can be up to the summation of SSB to PRACH occasion association period and [10] ms. SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [3]

- T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell. $T_{\Delta} = T_{rs}$.

- T_{margin} is time for SSB post-processing. T_{margin} can be up to 2ms.

- T_{rs} is the SMTC periodicity of the target NR SAN cell if the UE has been provided with an SMTC configuration for the target cellin the handover command, otherwise Trs is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with T_{rs}=5ms assuming the SSB transmission periodicity is 5ms. There is no requirement if the SSB transmission periodicity is not 5ms. If the UE has been provided with higher layer in TS 38.331 [2] signaling of *smtc2* prior to the handover command, T_{rs} follows *smtc1* or *smtc2* according to the physical cell ID of the target cell.

NOTE 1: The actual value of T_{IU} shall depend upon the PRACH configuration used in the target cell.

6.1D Handover for RedCap

6.1D.1 NR Handover

6.1D.1.1 Introduction

The purpose of NR handover is to change the NR PCell to another NR cell for RedCap UE. The requirements in this clause are applicable to SA NR.

The requirements in this clause apply for the following handover scenarios:

Handover to a target cell's initial BWP associated with CD-SSB;

Handover to a target cell's specific Redcap BWP associated with NCD-SSB besides to the initial BWP associated with CD-SSB (i.e. UE directly sync to the NCD-SSB and perform RACH on that BWP).

6.1D.1.2 NR FR1 - NR FR1 Handover

The requirements in this clause are applicable to both intra-frequency and inter-frequency handovers from NR FR1 cell to NR FR1 cell. The requirements in clause 6.1.1.2 shall apply when RedCap UE is capable of 2 Rx. When UE is only required to support 1 Rx antenna, the requirements defined in clause 6.1.1.2 shall apply except that:

T_{search} is the time required to search the target cell when the target cell is not already known when the handover command is received by the UE. If the target cell is known, then T_{search} = 0 ms. If the target cell is an unknown intra-frequency cell and the target cell Es/Iot≥-2 dB, then $T_{search} = 2*T_{rs}$ ms. If the target cell is an unknown inter-frequency cell and the target cell Es/Iot≥-2 dB, then $T_{search} = 5* T_{rs}$ ms. Regardless of whether DRX is in use by the UE, T_{search} shall still be based on non-DRX target cell search times.

- T_{rs} is the SMTC periodicity of the target NR cell if the UE has been provided with an SMTC configuration for the target cellin the handover command, otherwise,

- T_{rs} is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing as NCD-SSB indicated by nonCellDefiningSSB-r17 if the first active DL BWP included in handover command is configured with nonCellDefiningSSB-r17, otherwise, as CD-SSB indicated by absoluteFrequencySSB in frequencyInfoDL in handover command.

- If the measObjectNRs having the same SSB frequency and subcarrier spacing configured by MN and SN have different SMTC, Trs is the periodicity of one of the SMTC which is up to UE implementation. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with T_{rs}=5ms assuming the SSB transmission periodicity is 5ms. There is no requirement if the SSB transmission periodicity is not 5ms. If the UE has been provided with higher layer in TS 38.331 [2] signaling of *smtc2* prior to the handover command, T_{rs} follows *smtc1* or *smtc2* according to the physical cell ID of the target cell.

For RedCap UE with HD-FDD, the handover requirements are met provided that

SSB is available at the UE once every SMTC period during Tsearch

One SSB is available during TΔ

One SSB is available during $T_{IU.}$

6.1D.1.3 NR FR2- NR FR2 Handover

The requirements in this clause are applicable to both intra-frequency and inter-frequency handovers from NR FR2 cell to NR FR2 cell. The requirements in clause 6.1.1.4 shall apply when RedCap UE is capable of 2 Rx.

6.1D.2 NR Handover to other RATs

6.1D.2.1 NR – E-UTRAN Handover

The purpose of inter-RAT handover from NR to E-UTRAN is to change the radio access mode of PCell from NR to E-UTRAN for RedCap UE. The handover procedure is initiated from NR with a RRC message that implies a handover as described in TS 38.331 [2]. The requirements in this clause are applicable to SA NR.

The requirements in clause 6.1.2.1 shall apply when RedCap UE is capable of 2 Rx. When UE is only required to support 1 Rx antenna, the requirements for category 1bis UE defined in clause 5.1.2 in [15] shall apply.

6.2 RRC Connection Mobility Control

6.2.1 SA: RRC Re-establishment

6.2.1.1 Introduction

This clause contains requirements on the UE regarding RRC connection re-establishment procedure. RRC connection re-establishment is initiated when a UE in RRC_CONNECTED state on the carrier without CCA or on the carrier with CCA loses RRC connection due to any of failure cases, including radio link failure, handover failure, and RRC connection reconfiguration failure. The RRC connection re-establishment procedure is specified in clause 5.3.7 of TS 38.331 [2].

The requirements in this clause are applicable for RRC connection re-establishment to NR cell.

6.2.1.2 Requirements

In RRC_CONNECTED state the UE shall be capable of sending *RRCReestablishmentRequest* message within $T_{re\text{-}establish_delay}$ seconds from the moment it detects a loss in RRC connection. The total RRC connection delay ($T_{re\text{-}establish_delay}$) shall be less than:

$$T_{re-establish_delay} = T_{UE_re-establish_delay} + T_{UL_grant}$$

T_{UL_grant}: It is the time required to acquire and process uplink grant from the target PCell. The uplink grant is required to transmit *RRCReestablishmentRequest* message.

The UE re-establishment delay ($T_{UE_re\text{-}establish_delay}$) is specified in clause 6.2.1.2.1.

6.2.1.2.1 UE Re-establishment delay requirement

The UE re-establishment delay ($T_{UE_re\text{-}establish_delay}$) is the time between the moments when any of the conditions requiring RRC re-establishment as defined in clause 5.3.7 in TS 38.331 [2] is detected by the UE and when the UE sends PRACH to the target PCell. The UE re-establishment delay ($T_{UE_re\text{-}establish_delay}$) requirement shall be less than:

$$T_{UE_re-establish_delay} = 50\ ms + T_{identify_intra_NR} + \sum_{i=1}^{N_{freq}-1} T_{identify_inter_NR,i} + T_{SI-NR} + T_{PRACH}$$

The intra-frequency target NR cell shall be considered detectable if each relevant SSB can satisfy that:

- SS-RSRP related side conditions given in clause 10.1.2 and 10.1.3 are fulfilled for a corresponding NR Band for FR1 and FR2, respectively, and
- the conditions of SSB_RP and SSB Ês/Iot according to Annex B.2.2 for a corresponding NR Band are fulfilled.

The inter-frequency target NR cell shall be considered detectable when for each relevant SSB:

- SS-RSRP related side conditions given in clause 10.1.4 and 10.1.5 are fulfilled for a corresponding NR Band for FR1 and FR2, respectively, and
- the conditions of SSB_RP and SSB Ês/Iot according to Annex B.2.3 for a corresponding NR Band are fulfilled.

$T_{identify_intra_NR}$: It is the time to identify the target intra-frequency NR cell and it depends on whether the target NR cell is known cell or unknown cell and on the FR of the target NR cell. If the UE is not configured with intra-frequency NR carrier for RRC re-establishment then $T_{identify_intra_NR}$=0; otherwise $T_{identify_intra_NR}$ shall not exceed the values defined in Table 6.2.1.2.1-1 when *highSpeedMeasFlagFR2-r17* is not configured or UE is not capable of FR2 power class 6 and Table 6.2.1.2.1-3 when *highSpeedMeasFlagFR2-r17* is configured and UE is capable of FR2 power class 6.

$T_{identify_inter_NR,i}$: It is the time to identify the target inter-frequency NR cell on inter-frequency carrier *i* configured for RRC re-establishment and it depends on whether the target NR cell is known cell or unknown cell and on the FR of the target NR cell. $T_{identify_inter_NR,i}$ shall not exceed the values defined in Table 6.2.1.2.1-2.

T_{SMTC}: It is the periodicity of the SMTC occasion configured for the intra-frequency carrier. If the UE has been provided with higher layer in TS 38.331 [2] signaling of *smtc2*, T_{smtc} follows *smtc1* or *smtc2* according to the physical cell ID of the target cell.

$T_{SMTC,i}$: It is the periodicity of the SMTC occasion configured for the inter-frequency carrier *i*. If it is not configured, the UE may assume that the target SSB periodicity is no larger than 20 ms.

T_{SI-NR}: It is the time required for receiving all the relevant system information according to the reception procedure and the RRC procedure delay of system information blocks defined in TS 38.331 [2] for the target NR cell.

T_{PRACH}: It is the delay uncertainty in acquiring the first available PRACH occasion in the target NR cell. T_{PRACH} can be up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [3].

N_{freq}: It is the total number of NR frequencies to be monitored for RRC re-establishment; N_{freq} = 1 if the target intra-frequency NR cell is known, else N_{freq} = 2 and $T_{identify_intra_NR}$ = 0 if the target inter-frequency NR cell is known.

There is no requirement if the target cell does not contain the UE context.

In the requirement defined in the below tables, the target FR1 cell is known if it has been meeting the relevant cell identification requirement during the last 5 seconds otherwise it is unknown.

Table 6.2.1.2.1-1: Time to identify target NR cell for RRC connection re-establishment to NR intra-frequency cell

Serving cell SSB Ês/Iot (dB)	FR of target NR cell	$T_{identify_intra_NR}$ [ms]	
		Known NR cell	Unknown NR cell
≥ -8	FR1	MAX (200 ms, 5 x T_{SMTC})	MAX (800 ms, 10 x T_{SMTC})
≥ -8	FR2-1	N/A	MAX (1000 ms, 80 x T_{SMTC}))
≥ -8	FR2-2	N/A	MAX (1000 ms, 120 x T_{SMTC}))
< -8	FR1	N/A	800[Note1]
< -8	FR2-1	N/A	3520[Note1]
< -8	FR2-2	N/A	5280[Note1]

Note 1: The UE is not required to successfully identify a cell on any NR frequency layer when T_{SMTC} > 20 ms and serving cell SSB Ês/Iot < -8 dB.

T Table 6.2.1.2.1-2: Time to identify target NR cell for RRC connection re-establishment to NR inter-frequency cell

Serving cell SSB Ês/Iot (dB)	FR of target NR cell	$T_{identify_inter_NR, i}$ [ms]	
		Known NR cell	Unknown NR cell
≥ -8	FR1	MAX (200 ms, 6 x $T_{SMTC, i}$)	MAX (800 ms, 13 x $T_{SMTC, i}$)
≥ -8	FR2-1	N/A	MAX (1000 ms, 104 x $T_{SMTC, i}$))
≥ -8	FR2-2	N/A	MAX (1000 ms, 156 x $T_{SMTC, i}$))
< -8	FR1	N/A	800[Note1]
< -8	FR2-1	N/A	4000[Note1]
< -8	FR2-2	N/A	6000 [Note1]
Note 1: The UE is not required to successfully identify a cell on any NR frequency layer when $T_{SMTC,i}$ > 20 ms and serving cell SSB Ês/Iot < -8 dB.			

Table 6.2.1.2.1-3: Time to identify target NR cell for RRC connection re-establishment to NR intra-frequency cell when *highSpeedMeasFlagFR2-r17* is configured (Frequency range FR2)

Serving cell SSB Ês/Iot (dB)	FR of target NR cell	$T_{identify_intra_NR}$ [ms]	
		Known NR cell	Unknown NR cell
≥ -8	FR2	N/A	MAX (1000 ms, 10 xN2 x T_{SMTC}))
Note 1: The UE is not required to successfully identify a cell on any NR frequency layer when T_{SMTC} > 20 ms and serving cell SSB Ês/Iot < -8 dB. Note 2: When SMTC <= 40ms, N2=2 when *highSpeedMeasFlagFR2-r17* = set1; N2=6 when *highSpeedMeasFlagFR2-r17* = set2.			

6.2.1A RRC Re-establishment with CCA

6.2.1A.1 Introduction

This clause contains requirements on the UE regarding RRC connection re-establishment procedure on the carrier with CCA. RRC connection re-establishment on the carrier with CCA is initiated when a UE in RRC_CONNECTED state on the carrier w/o or with CCA loses RRC connection due to any of failure cases, including radio link failure, handover failure, and RRC connection reconfiguration failure. The RRC connection re-establishment procedure is specified in clause 5.3.7 of TS 38.331 [2].

In the requirements of clause 6.2.1A, the term SMTC occasion not available at the UE refers to when the SMTC contains SSBs configured by gNB in a cell on a carrier frequency subject to CCA, but the first two successive candidate SSB positions for the same SSB index within the discovery burst transmission window are not available at the UE due to DL CCA failures at gNB during the corresponding RRC re-establishment period; otherwise the SMTC occasion is considered as available at the UE.

In the requirements of clause 6.2.1A, the term PRACH occasion unavailable for transmission refers to when the PRACH occasion is configured by gNB but not transmitted by the UE during the corresponding period due to UL CCA failure at the UE; otherwise the PRACH occasion is considered as available for transmission.

The requirements in this clause are applicable for RRC connection re-establishment to NR cell on the carrier with CCA.

When the RRC connection re-establishment is performed on a cell in FR2-2 with shared spectrum channel access, UE shall determine the CCA mode of the neighbour cell according to *channelAccessMode2-r17* if configured. If *channelAccessMode2-r17* of the cell is enabled, UE shall assume that CCA applies to the cell and perform measurement accordingly, and the requirements in clause 6.2.1A shall apply; otherwise, UE shall assume that CCA does not apply to the cell and perform measurement accordingly, and requirements in 6.2.1 shall apply.

6.2.1A.2 Requirements

In RRC_CONNECTED state on the carrier w/o or with CCA the UE shall be capable of sending *RRCReestablishmentRequest* message within $T_{re\text{-}establish_delay_CCA}$ seconds from the moment it detects a loss in RRC connection. The total RRC connection delay ($T_{re\text{-}establish_delay_CCA}$) shall be less than:

$$T_{re-establish_delay_CCA} = T_{UE_re-establish_delay_CCA} + T_{UL_grant}$$

T_{UL_grant}: It is the time required to acquire and process uplink grant from the target PCell with CCA. The uplink grant is required to transmit *RRCReestablishmentRequest* message.

The UE re-establishment delay ($T_{UE_re\text{-}establish_delay_CCA}$) is specified in clause 6.2.1A.2.1.

6.2.1A.2.1 UE Re-establishment with CCA delay requirement

The UE re-establishment on the carrier with CCA delay ($T_{UE_re\text{-}establish_delay_CCA}$) is the time between the moments when any of the conditions requiring RRC re-establishment on the carrier with CCA as defined in clause 5.3.7 in TS 38.331 [2] is detected by the UE and when the UE sends PRACH to the target PCell on the carrier with CCA . The UE re-establishment delay requirement ($T_{UE_re\text{-}establish_delay_CCA}$) on the carrier with CCA shall be less than:

$$T_{UE_re-establish_delay_CCA} = 50\text{ ms} + T_{identify_intra_NR_CCA} + \sum_{i=1}^{N_{freq}-1} T_{identify_inter_NR_CCA,i} + T_{SI-NR_CCA} + T_{PRACH_CCA}$$

The intra-frequency target NR cell with CCA shall be considered detectable if each relevant SSB can satisfy that:

- SS-RSRP related side conditions given in clause 10.1.2 and 10.1.3 are fulfilled for a corresponding NR Band for FR1 and FR2-2, respectively, and
- the conditions of SSB_RP and SSB Ês/Iot according to Annex B.2.3 for a corresponding NR Band are fulfilled.

The inter-frequency target NR cell on the carrier with CCA shall be considered detectable when for each relevant SSB:

- SS-RSRP related side conditions given in clause 10.1.4 and 10.1.5 are fulfilled for a corresponding NR Band for FR1 and FR2-2, respectively, and
- the conditions of SSB_RP and SSB Ês/Iot according to Annex B.2.2 for a corresponding NR Band are fulfilled.

$T_{identify_intra_NR_CCA}$: If the target intra-frequency carrier is the carrier without CCA, it is the time to identify the target intra-frequency NR cell which is defined in clause 6.2.1; otherwise it is the time to identify the target intra-frequency NR cell on the carrier with CCA and it depends on whether the target NR cell on the carrier with CCA is known cell or unknown cell and on the frequency range (FR) of the target NR cell on the carrier with CCA. If the UE is not configured with intra-frequency NR carrier with CCA for RRC re-establishment then $T_{identify_intra_NR_CCA}$=0; otherwise $T_{identify_intra_NR_CCA}$ shall not exceed the values defined in Table 6.2.1A.2.1-1.

$T_{identify_inter_NR_CCA,i}$: If the target inter-frequency carrier is the carrier without CCA, it is the time to identify the target inter-frequency NR cell which is defined in clause 6.2.1; otherwise it is the time to identify the target inter-frequency NR cell on inter-frequency carrier *i* with CCA configured for RRC re-establishment and it depends on whether the target NR cell on the inter-frequency carrier with CCA is known or unknown. $T_{identify_inter_NR_CCA,i}$ shall not exceed the values defined in Table 6.2.1A.2.1-2.

T_{SMTC}: It is the periodicity of the SMTC occasion configured for the intra-frequency carrier. If the UE has been provided with higher layer in TS 38.331 [2] signaling of *smtc2*, T_{smtc} follows *smtc1* or *smtc2* according to the physical cell ID of the target cell.

$T_{SMTC,i}$: It is the periodicity of the SMTC occasion configured for the inter-frequency carrier *i*. If it is not configured, the UE may assume that the target SSB periodicity is not larger than 20 ms.

$T_{SI\text{-}NR_CCA}$: It is the time required for receiving all the relevant system information according to the reception procedure and the RRC procedure delay of system information blocks defined in TS 38.331 [2] for the target NR cell on the carrier with CCA.

T_{PRACH_CCA} is the delay uncertainty in acquiring the first available PRACH occasion in the target NR Cell on the carrier with CCA:

$T_{PRACH_CCA} = (1+ K_3)*T_{SSB,RO} + 10$ ms, where:

- $T_{SSB,RO}$ is the SSB to PRACH occasion association period as defined inTable 8.1-1 of TS 38.213 [39].
- K_3 is the number of consecutive SSB to PRACH occasion association periods during which no PRACH occasion is available for PRACH transmission due to UL CCA failure. $K_3 = 0$ for Type 2C UL channel access procedure as defined in TS 37.213 [57].

N_{freq}: It is the total number of NR frequencies to be monitored for RRC re-establishment; $N_{freq} = 1$ if the target NR cell on the intra-frequency carrier with CCA is known, else $N_{freq} = 2$ and $T_{identify_intra_NR_CCA} = 0$ if the target NR cell on the inter-frequency carrier with CCA is known.

There is no requirement if the target cell on the carrier with CCA does not contain the UE context.

In the requirement defined in the below tables, the target FR1 cell on the carrier with CCA is known if it has been meeting the relevant cell identification requirement during the last 8 seconds otherwise it is unknown.

Table 6.2.1A.2.1-1: Time to identify target NR cell for RRC connection re-establishment to NR intra-frequency cell with CCA

Serving cell SSB Ês/Iot (dB)	Frequency range (FR) of target NR cell	$T_{identify_intra_NR_CCA}$ [ms]	
		Known NR cell	Unknown NR cell
≥ -8	FR1	MAX (200 ms, $(5+K_1) \times T_{SMTC}$)	MAX (800 ms, $(10+ K_1) \times T_{SMTC}$)
≥ -8	FR2-2	N/A	MAX (1000 ms, N x $(10+ K_3) \times T_{SMTC}$)
< -8	FR1	N/A	$(800+20 \times K_1)$ Note1
< -8	FR2-2	N/A	N x $(440+20 \times K_3)$ Note1
Note 1: The UE is not required to successfully identify a cell on any NR frequency layer with CCA when T_{SMTC} > 20 ms and serving cell SSB Ês/Iot < -8 dB.			
Note 2: K_1 is the number of SMTC occasions not available at the UE due during RRC re-establishment period on the carrier with CCA.			
Note 3: K_3 is the number of SMTC occasion groups not available at the UE during RRC re-establishment period on the carrier with CCA. An SMTC occasion group consists of N consecutive SMTC occasions. An SMTC occasion group is not available, when at least one SMTC occasion in the group is not transmitted by the gNB. N is equal to 12.			

Table 6.2.1A.2.1-2: Time to identify target NR cell for RRC connection re-establishment to NR inter-frequency cell on the carrier with CCA

Serving cell SSB Ês/Iot (dB)	Frequency range (FR) of target NR cell	$T_{identify_inter_NR_CCA,\ i}$ [ms]	
		Known NR cell	Unknown NR cell
≥ -8	FR1	MAX (200 ms, $([6]+K_{2,i}) \times T_{SMTC,\ i}$)	MAX (800 ms, $([13]+K_{2,i}) \times T_{SMTC,\ i}$)
< -8	FR1	N/A	$(800+20 \times K_{2,i})$ Note1
Note 1: The UE is not required to successfully identify a cell on any NR frequency layer with CCA when $T_{SMTC,i}$ > 20 ms and serving cell SSB Ês/Iot < -8 dB.			
Note 2: $K_{2,i}$ is the number of SMTC occasions not available at the UE during RRC re-establishment period on the “i” th carrier with CCA,			

6.2.1B SA: RRC Re-establishment for RedCap

6.2.1B.1 Introduction

This clause contains requirements on the RedCap UE regarding RRC connection re-establishment procedure.

6.2.1B.2 Requirements

The requirements in clause 6.2.1 shall apply for 2 Rx RedCap UE. For 1 Rx RedCap UE, the requirements defined in clause 6.2.1 shall apply except that:

- $T_{identify_intra_NR}$ as specified in Table 6.2.1B.2-1.
- $T_{identify_inter_NR,\ i}$ as specified in Table 6.2.1B.2-2.

Table 6.2.1B.2-1: Time to identify target NR cell for RRC connection re-establishment to NR intra-frequency cell

Serving cell SSB Ês/Iot (dB)	FR of target NR cell	$T_{identify_intra_NR}$ [ms]	
		Known NR cell	Unknown NR cell
≥ -8	FR1	MAX (200 ms, 6 x T_{SMTC})	MAX (800 ms, [11] x T_{SMTC})
< -8	FR1	N/A	800[Note1]
Note 1: The UE is not required to successfully identify a cell on any NR frequency layer when T_{SMTC} > 20 ms and serving cell SSB Ês/Iot < -8 dB.			

Table 6.2.1B.2-2: Time to identify target NR cell for RRC connection re-establishment to NR inter-frequency cell

Serving cell SSB Ês/Iot (dB)	FR of target NR cell	$T_{identify_inter_NR,\ i}$ [ms]	
		Known NR cell	Unknown NR cell
≥ -8	FR1	MAX (200 ms, 7 x $T_{SMTC,\ i}$)	MAX (800 ms, [14] x $T_{SMTC,\ i}$)
< -8	FR1	N/A	800[Note1]
Note 1: The UE is not required to successfully identify a cell on any NR frequency layer when $T_{SMTC,i}$ > 20 ms and serving cell SSB Ês/Iot < -8 dB.			

When the Redcap specific initial BWP is configured for random access, $T_{UE_re-establish_delay}$ in clause 6.2.1 is extended by 6ms.

6.2.2 Random access

6.2.2.1 Introduction

This clause contains requirements on the UE regarding random access procedure. The random access procedure is initiated to establish uplink time synchronization for a UE which either has not acquired or has lost its uplink synchronization, or to convey UE's request Other SI, or for beam failure recovery. The random access is specified in clause 8 of TS 38.213 [3] and the control of the RACH transmission is specified in clause 5.1 of TS 38.321 [7]. Two types of procedure are defined for the random access, the 4-step RA type, and the 2-step RA type [7]. The decision on which type of procedure to adopt is as described in clause 5.1.1 of TS 38.321 [7]. The requirements for the 4-step RA type procedure are described in clause 6.2.2.2, whereas the requirements for the 2-step RA type procedure are described in the clause 6.2.2.3 of this specification.

6.2.2.2 Requirements for 4-step RA type

The UE shall select the type of random access at initiation of the random access procedure based on network configuration, as specified in clause 5.1.1 in TS 38.321 [7].

The UE shall have capability to calculate PRACH transmission power according to the PRACH power formula defined in clause 7.4 of TS 38.213 [3] and apply this power level at the first preamble or additional preambles. The absolute power applied to the first preamble shall have an accuracy as specified in Table 6.3.4.2-1 of TS 38.101-1 [18] for FR1 and in Table 6.3.4.2-1 of TS 38.101-2 [19] for FR2. The relative power applied to additional preambles shall have an accuracy as specified in Table 6.3.4.3-1 of TS 38.101-1 [18] for FR1 and clause 6.3.4.3 of TS38.101-2 [19] for FR2.

The UE shall indicate a random access problem to upper layers if the maximum number of preamble transmission counter has been reached for the random access procedure on PCell or PSCell as specified in clause 5.1.4 in TS 38.321 [7].

The requirements in this clause apply for UE in SA operation mode or any MR-DC operation mode.

6.2.2.2.1 Contention based random access

6.2.2.2.1.1 Correct behaviour when transmitting Random Access Preamble

With the UE selected SSB with SS-RSRP above *rsrp-ThresholdSSB*, UE shall have the capability to select a Random Access Preamble randomly with equal probability from the Random Access Preambles associated with the selected SSB if the association between Random Access Preambles and SSB is configured, as specified in clause 5.1.2 in TS 38.321 [7].

With the UE selected SSB with SS-RSRP above *rsrp-ThresholdSSB*, UE shall have the capability to transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex* if configured, if the association between PRACH occasions and SSBs is configured, and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2 in TS 38.321 [7].

6.2.2.2.1.2 Correct behaviour when receiving Random Access Response

The UE may stop monitoring for Random Access Response(s) and shall transmit the msg3 if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

6.2.2.2.1.3 Correct behaviour when not receiving Random Access Response

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window defined in clause 5.1.4 in TS 38.321 [7].

6.2.2.2.1.4 Correct behaviour when receiving an UL grant for msg3 retransmission

The UE shall re-transmit the msg3 upon the reception of anUL grant for msg3 retransmission.

6.2.2.2.1.5 SA: Correct behaviour when receiving a message over Temporary C-RNTI

The UE shall send ACK if the Contention Resolution is successful.

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires unless the received message includes a UE Contention Resolution Identity MAC control element and the UE Contention Resolution Identity included in the MAC control element matches the CCCH SDU transmitted in the uplink message.

6.2.2.2.1.6 Correct behaviour when contention Resolution timer expires

The UE shall re-select a preamble and transmit with the calculated PRACH transmission power when the backoff time expires if the Contention Resolution Timer expires.

6.2.2.2.2 Non-Contention based random access

6.2.2.2.2.1 Correct behaviour when transmitting Random Access Preamble

If the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs is configured, with the UE selected SSB with SS-RSRP above *rsrp-ThresholdSSB* amongst the associated SSBs, UE shall have the capability to select the Random Access Preamble corresponding to the selected SSB, and to transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex* if configured, and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2 in TS 38.321 [7].

If the contention-free Random Access Resources and the contention-free PRACH occasions associated with CSI-RSs is configured, with the UE selected CSI-RS with CSI-RSRP above *rsrp-ThresholdCSI-RS* amongst the associated CSI-RSs, UE shall have the capability to select the Random Access Preamble corresponding to the selected CSI-RS, and to transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions in *ra-OccasionList* corresponding to the selected CSI-RS, and PRACH occasion shall be randomly selected with equal probability amongst the selected CSI-RS associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2 in TS 38.321 [7].

If the random access procedure is initialized for beam failure recovery and if the contention-free Random Access Resources and the contention-free PRACH occasions for beam failure recovery request associated with any of the SSBs and/or CSI-RSs is configured, UE shall have the capability to select the Random Access Preamble corresponding to the selected SSB with SS-RSRP above *rsrp-ThresholdSSB* amongst the associated SSBs or the selected CSI-RS with CSI-RSRP above *rsrp-ThresholdCSI-RS* amongst the associated CSI-RSs, and to transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex* if configured, or from the PRACH occasions in *ra-OccasionList* corresponding to the selected CSI-RS, and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB assocated PRACH occasions or the selected CSI-RS associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2 in TS 38.321 [7].

6.2.2.2.2.2 Correct behaviour when receiving Random Access Response

The UE may stop monitoring for Random Access Response(s), if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble, unless the random access procedure is initialized for Other SI request from UE.

The UE may stop monitoring for Random Access Response(s) and shall monitor the Other SI transmission if the Random Access Response only contains a Random Access Preamble identifier which is corresponding to the transmitted Random Access Preamble and the random access procedure is initialized for SI request from UE, as specified in clause 5.1.4 in TS 38.321 [7].

The UE may stop monitoring for Random Access Response(s), if the contention-free Random Access Preamble for beam failure recovery request was transmitted and if the PDCCH addressed to UE's C-RNTI is received, as specified in clause 5.1.4 in TS 38.321 [7].

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [7] for the next available PRACH occasion, and transmit the preamble with the calculated PRACH transmission power if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

6.2.2.2.2.3 Correct behaviour when not receiving Random Access Response

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [7] for the next available PRACH occasion, and transmit the preamble with the calculated PRACH transmission power, if no Random Access Response is received within the RA Response window configured in *RACH-ConfigCommon* or if no PDCCH addressed to UE's C-RNTI is received within the RA Response window configured in *BeamFailureRecoveryConfig*, as defined in clause 5.1.4 in TS 38.321 [7].

6.2.2.2.3 UE behaviour when configured with supplementary UL

In addition to the requirements defined in clause 6.2.2.2.1 and 6.2.2.2.2, a UE configured with supplementary UL carrier shall use RACH configuration for the supplementary UL carrier contained in RMSI and RRC dedicated signalling. If the cell for the random access procedure is configured with supplementary UL, the UE shall transmit or re-transmit PRACH preamble on the supplementary UL carrier if the SS-RSRP measured by the UE on the DL carrier is lower than the *rsrp-ThresholdSSB-SUL* as defined in TS 38.331 [2].

6.2.2.3 Requirements for 2-step RA type

The UE shall select the type of random access at initiation of the random access procedure based on network configuration, as specified in clause 5.1.1 in TS 38.321 [7].

The UE shall have capability to calculate MsgA PRACH transmission power according to the PRACH power formula defined in clause 7.4 of TS 38.213 [3] and the MsgA PUSCH power formula of clause 7.1.1 of TS 38.213 [3] and apply

this power level at the first MsgA or additional MsgA repetitions. The absolute power applied to the first preamble shall have an accuracy as specified in Table 6.3.4.2-1 of TS 38.101-1 [18] for frequency range 1 and in Table 6.3.4.2-1 of TS 38.101-2 [19] for frequency range 2. The relative power applied to additional preambles shall have an accuracy as specified in Table 6.3.4.3-1 of TS 38.101-1 [18] for frequency range 1 and clause 6.3.4.3 of TS38.101-2 [19] for frequency range 2.

The UE shall switch to 4-step RA type procedure if the MsgA transmission counter has exceeded *msgA-TransMax*, if configured, as specified in clause 5.1.4a of TS 38.321 [7]. The UE shall indicate a Random Access problem to upper layers if the maximum number of preamble transmission counter has been reached for the random access procedure on PCell or PSCell as specified in clause 5.1.4a in TS 38.321 [7].

The requirements in this clause apply for UE in SA operation mode or any MR-DC operation mode.

6.2.2.3.1 Contention based random access

6.2.2.3.1.1 Correct behaviour when transmitting MsgA

With the UE selected SSB with SS-RSRP above *msgA-RSRP-ThresholdSSB*, the UE shall have the capability to select a Random Access Preamble randomly with equal probability from the Random Access Preambles associated with the selected SSB if the association between Random Access Preambles and SS blocks is configured, as specified in clause 5.1.2a in TS 38.321 [7].

With the UE selected SSB with SS-RSRP above *msgA-RSRP-ThresholdSSB*, UE shall have the capability to transmit MsgA PRACH on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given first by the *msgA-SSB-SharedRO-MaskIndex* if configured, or next by the *ra-ssb-OccasionMaskIndex* if configured, if the association between PRACH occasions and SSBs is configured.

The PRACH preamble and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2a in TS 38.321 [7].

In association with the MsgA PRACH, the UE should have the capability to transmit MsgA PUSCH on the corresponding PUSCH occasion associated with a DMRS resource, which is mapped from the MsgA PRACH ocasion, and preamble index as defined in clause 8.1A in TS 38.213 [3].

6.2.2.3.1.2 Correct behaviour when receiving MsgB

The UE shall stop monitoring for MsgB, when the UE has successfully received the PDCCH addressed to UE as specified in clause 8.2A in TS 38.213 [3] containing a successRAR MAC subPDU or a fallbackRAR MAC subPDU as described in clause 5.1.4a in TS 38.321 [7].

The UE shall send ACK if Success RAR is received in MsgB and the Contention Resolution is successful, as defined in clause 5.1.4a in TS 38.321 [7].

If MsgB contains a fallbackRAR MAC subPDU the UE shall fallback to the 4-step RA type by transmitting the msg3 containing the payload of MsgA PUSCH and monitor contention resolution as described in clause 8.2A in TS 38.213 [3].

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires unless the Random Access Response reception is considered as successful, as defined in clause 5.1.4a in TS 38.321 [7].

6.2.2.3.1.3 Correct behaviour when not receiving MsgB

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires unless the Random Access Response reception is considered as successful, as defined in clause 5.1.4a in TS 38.321 [7].

6.2.2.3.2 Non-Contention based random access

6.2.2.3.2.1 Correct behaviour when transmitting MsgA

If the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs is configured, with the UE selected SSB with SS-RSRP above *msgA-RSRP-ThresholdSSB* amongst the associated SSBs, UE shall have the capability to select the Random Access Preamble corresponding to the selected SSB, and to transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given first by the *msgA-SSB-SharedRO-MaskIndex* if configured, or next by the *ra-ssb-OccasionMaskIndex* if configured, and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2a in TS 38.321 [7].

In association with the MsgA PRACH, the UE should have the capability to transmit MsgA PUSCH on the corresponding PUSCH occasion associated with a DMRS resource, which is mapped from the MsgA PRACH ocasion, and preamble index as defined in clause 8.1A in TS 38.213 [3].

6.2.2.3.2.2 Correct behaviour when receiving MsgB

The UE may stop monitoring for MsgB, when the UE has successfully received the PDCCH addressed to UE as specified in clause 8.2A in TS 38.213 [3] containing a successRAR MAC subPDU or a fallbackRAR MAC subPDU as described in clause 5.1.4a in TS 38.321 [7].

If MsgB contains a fallbackRAR MAC subPDU the UE shall fallback to the 4-step RA type by transmitting the msg3 containing the payload of MsgA PUSCH as described in clause 8.2A in TS 38.213 [3].

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2a in TS 38.321 [7] for the next available PRACH occasion, and transmit the preamble with the calculated MsgA PRACH and MsgA PUSCH transmission power if all received MsgBs contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

6.2.2.3.2.3 Correct behaviour when not receiving MsgB

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2a in TS 38.321 [7] for the next available PRACH occasion, and transmit MsgA with the calculated MsgA PRACH and MsgA PUSCH transmission power, if no MsgB is received within the MsgB Response window configured in *RACH-ConfigGenericTwoStepRA* and the Random Access Response Reception has not been considered as successful as defined in clause 5.1.4a in TS 38.321 [7].

6.2.2.3.3 UE behaviour when configured with supplementary UL

In addition to the requirements defined in clause 6.2.2.3.1 and 6.2.2.3.2, a UE configured with supplementary UL carrier shall use RACH configuration for the supplementary UL carrier contained in RMSI and RRC dedicated signalling. If the cell for the random access procedure is configured with supplementary UL, the UE shall transmit or re-transmit PRACH preamble on the supplementary UL carrier if the SS-RSRP measured by the UE on the DL carrier is lower than the *rsrp-ThresholdSSB-SUL* as defined in TS 38.321 [7].

6.2.2A Random access when CCA is used on target frequency

6.2.2A.1 Introduction

This clause contains requirements on the UE regarding random access procedure when CCA is used on the target frequency. The random access procedure is initiated to establish uplink time synchronization for a UE which either has not acquired or has lost its uplink synchronization, or to convey UE's request Other SI, or for beam failure recovery. The random access is specified in clause 8 of TS 38.213 [3] and the control of the RACH transmission is specified in clause 5.1 of TS 38.321 [7]. Two types of procedure are defined for the random access, the 4-step RA type, and the 2-step RA type [7]. The decision on which type of procedure to adopt is as described in clause 5.1.1 of TS 38.321 [7]. The requirements for the 4-step RA type procedure are described in clause 6.2.2A.2, whereas the requirements for the 2-step RA type procedure are described in the clause 6.2.2A.3 of this specification.

6.2.2A.2 Requirements for 4-step RA type

The UE shall select the type of random access at initiation of the random access procedure based on network configuration, as specified in clause 5.1.1 in TS 38.321 [7].

The UE shall have capability to calculate PRACH transmission power according to the PRACH power formula defined in clause 7.4 of TS 38.213 [3] and apply this power level at the first preamble or additional preambles. The absolute power applied to the first preamble shall have an accuracy as specified in Table 6.3.4.2-1 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy as specified in Table 6.3.4.3-1 of TS 38.101-1 [18].

The UE shall indicate a random access problem to upper layers if the maximum number of preamble transmission counter has been reached for the random access procedure on PCell or PSCell as specified in clause 5.1.4 in TS 38.321 [7].

The requirements in this clause apply for UE operating in a carrier frequency with CCA in SA operation mode or any MR-DC operation mode, in a carrier frequency with CCA.

6.2.2A.2.1 Contention based random access

6.2.2A.2.1.1 Correct behaviour when transmitting Random Access Preamble

With the UE selected SSB with SS-RSRP above *rsrp-ThresholdSSB*, UE shall have the capability to select a Random Access Preamble randomly with equal probability from the Random Access Preambles associated with the selected SSB if the association between Random Access Preambles and SSB is configured, as specified in clause 5.1.2 in TS 38.321 [7].

If the UL CCA is successful on the next available PRACH occasion, with the UE selected SSB with SS-RSRP above *rsrp-ThresholdSSB*, UE shall transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex* if configured, if the association between PRACH occasions and SSBs is configured, and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2 in TS 38.321 [7].

If UE is configured *lbt-FailureRecoveryConfig* and is capable of *ul-LBT-FailureDetectionRecovery* [2] then upon detecting uplink CCA failure during the random access procedure for random access preamble transmission, as outlined in Clause 5.21.2 of TS 38.321 [7], the UE shall perform the Random Access Resource selection procedure again, as specified in clause 5.1.3 in TS 38.321 [7].

If UE is not configured *lbt-FailureRecoveryConfig* or is not capable of *ul-LBT-FailureDetectionRecovery* [2] then upon detecting uplink CCA failure during the random access procedure for random access preamble transmission, as outlined in Clause 5.21.2 of TS 38.321 [7], the UE shall increment PREAMBLE_TRANSMISSION_COUNTER by 1. The UE shall again perform the Random Access Resource selection procedure if PREAMBLE_TRANSMISSION_COUNTER < *preambleTransMax* + 1, as specified in clause 5.1.3 in TS 38.321 [7].

6.2.2A.2.1.2 Correct behaviour when receiving Random Access Response

The UE may stop monitoring for Random Access Response(s) and shall transmit the msg3 if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

6.2.2A.2.1.3 Correct behaviour when not receiving Random Access Response

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [7], if the UL CCA is successful, and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window defined in clause 5.1.4 in TS 38.321 [7].

6.2.2A.2.1.4 Correct behaviour when receiving an UL grant for msg3 retransmission

The UE shall re-transmit the msg3 upon the reception of an UL grant for msg3 retransmission, if the UL CCA is successful,

6.2.2A.2.1.5 Correct behaviour when receiving a message over Temporary C-RNTI

If the UL CCA is successful, The UE shall send ACK if the Contention Resolution is successful.

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires and the UL CCA is successful, unless the received message includes a UE Contention Resolution Identity MAC control element and the UE Contention Resolution Identity included in the MAC control element matches the CCCH SDU transmitted in the uplink message.

6.2.2A.2.1.6 Correct behaviour when contention Resolution timer expires

The UE shall re-select a preamble and transmit with the calculated PRACH transmission power when the backoff time expires if the Contention Resolution Timer expires.

6.2.2A.2.2 Non-Contention based random access

6.2.2A.2.2.1 Correct behaviour when transmitting Random Access Preamble

If the UL CCA is successful on the next available PRACH occasion and if the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs is configured, with the UE selected SSB with SS-RSRP above *rsrp-ThresholdSSB* amongst the associated SSBs, UE shall have the capability to select the Random Access Preamble corresponding to the selected SSB, and to transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex* if configured, and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2 in TS 38.321 [7].

If the UL CCA is successful, and if the random access procedure is initialized for beam failure recovery and if the contention-free Random Access Resources and the contention-free PRACH occasions for beam failure recovery request associated with SSBs configured, UE shall have the capability to select the Random Access Preamble corresponding to the selected SSB with SS-RSRP above *rsrp-ThresholdSSB* amongst the associated SSBs, and to transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex* if configured, and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2 in TS 38.321 [7].

If UE is configured *lbt-FailureRecoveryConfig* and is capable of *ul-LBT-FailureDetectionRecovery* [2] then upon detecting uplink CCA failure during the random access procedure for random access preamble transmission, as outlined in Clause 5.21.2 of TS 38.321 [7], the UE shall perform the Random Access Resource selection procedure again, as specified in clause 5.1.3 in TS 38.321 [7].

If UE is not configured *lbt-FailureRecoveryConfig* or is not capable of *ul-LBT-FailureDetectionRecovery* [2] then upon detecting uplink CCA failure during the random access procedure for random access preamble transmission, as outlined in Clause 5.21.2 of TS 38.321 [7], the UE shall increment PREAMBLE_TRANSMISSION_COUNTER by 1. The UE shall again perform the Random Access Resource selection procedure if PREAMBLE_TRANSMISSION_COUNTER < *preambleTransMax* + 1, as specified in clause 5.1.3 in TS 38.321 [7].

6.2.2A.2.2.2 Correct behaviour when receiving Random Access Response

The UE may stop monitoring for Random Access Response(s), if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble, unless the random access procedure is initialized for Other SI request from UE.

The UE may stop monitoring for Random Access Response(s) and shall monitor the Other SI transmission if the Random Access Response only contains a Random Access Preamble identifier which is corresponding to the transmitted Random Access Preamble and the random access procedure is initialized for SI request from UE, as specified in clause 5.1.4 in TS 38.321 [7].

The UE may stop monitoring for Random Access Response(s), if the contention-free Random Access Preamble for beam failure recovery request was transmitted and if the PDCCH addressed to UE's C-RNTI is received, as specified in clause 5.1.4 in TS 38.321 [7].

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [7] for the next available PRACH occasion if the UL CCA is successful, and transmit the preamble with the calculated PRACH transmission power if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

6.2.2A.2.2.3 Correct behaviour when not receiving Random Access Response

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [7] for the next available PRACH occasion if the UL CCA is successful, and transmit the preamble with the calculated PRACH transmission power, if no Random Access Response is received within the RA Response window configured in *RACH-ConfigCommon* or if no PDCCH addressed to UE's C-RNTI is received within the RA Response window configured in *BeamFailureRecoveryConfig*, as defined in clause 5.1.4 in TS 38.321 [7].

6.2.2A.3 Requirements for 2-step RA type

The UE shall select the type of random access at initiation of the random access procedure based on network configuration, as specified in clause 5.1.1 in TS 38.321 [7].

The UE shall have capability to calculate MsgA PRACH transmission power according to the PRACH power formula defined in clause 7.4 of TS 38.213 [3] and the MsgA PUSCH power formula of clause 7.1.1 of TS 38.213 [3] and apply this power level at the first MsgA or additional MsgA repetitions. The absolute power applied to the first preamble shall have an accuracy as specified in Table 6.3.4.2-1 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy as specified in Table 6.3.4.3-1 of TS 38.101-1 [18].

The UE shall switch to 4-step RA type procedure if the MsgA transmission counter has exceeded *msgA-TransMax*, if configured, as specified in clause 5.1.4a of TS 38.321 [7]. The UE shall indicate a Random Access problem to upper layers if the maximum number of preamble transmission counter has been reached for the random access procedure on PCell or PSCell as specified in clause 5.1.4a in TS 38.321 [7].

The requirements in this clause apply for UE operating in a carrier frequency with CCA in SA operation mode or any MR-DC operation mode, in a carrier frequency with CCA.

6.2.2A.3.1 Contention based random access

6.2.2A.3.1.1 Correct behaviour when transmitting MsgA

With the UE selected SSB with SS-RSRP above *msgA-RSRP-ThresholdSSB*, the UE shall have the capability to select a Random Access Preamble randomly with equal probability from the Random Access Preambles associated with the selected SSB if the association between Random Access Preambles and SS blocks is configured, as specified in clause 5.1.2a in TS 38.321 [7].

If the UL CCA is successful on the next available PRACH occasion, with the UE selected SSB with SS-RSRP above *msgA-RSRP-ThresholdSSB*, UE shall have the capability to transmit MsgA PRACH on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given first by the *msgA-SSB-SharedRO-MaskIndex* if configured, or next by the *ra-ssb-OccasionMaskIndex* if configured, if the association between PRACH occasions and SSBs is configured.

The PRACH preamble and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2a in TS 38.321 [7].

In association with the MsgA PRACH, if the UL CCA is successful, the UE should have the capability to transmit MsgA PUSCH on the corresponding PUSCH occasion associated with a DMRS resource, which is mapped from the MsgA PRACH occasion, and preamble index as defined in clause 8.1A in TS 38.213 [3].

If UE is configured *lbt-FailureRecoveryConfig* and is capable of *ul-LBT-FailureDetectionRecovery* [2] then upon detecting uplink CCA failure during the random access procedure for MsgA transmission, as outlined in Clause 5.21.2 of TS 38.321 [7], the UE shall cancel the transmission of the MsgA payload on the associated PUSCH resource and perform the Random Access Resource selection procedure, as specified in clause 5.1.3a in TS 38.321 [7].

If UE is not configured *lbt-FailureRecoveryConfig* or is not capable of *ul-LBT-FailureDetectionRecovery* [2] then upon detecting uplink CCA failure during the random access procedure for MsgA transmission, as outlined in Clause 5.21.2 of TS 38.321 [7], the UE shall cancel the transmission of the MsgA payload on the associated PUSCH resource and increment PREAMBLE_TRANSMISSION_COUNTER by 1. The UE shall again perform the Random Access Resource selection procedure if PREAMBLE_TRANSMISSION_COUNTER < *preambleTransMax* + 1, as specified in clause 5.1.3a in TS 38.321 [7]. If the Random Access Procedure is not complete and the UE is configured with *msgA-TransMax* then, as specified in clause 5.1.3a in TS 38.321 [7], the UE shall perform the Random Access Resource selection procedure with 4-step RA type provided that PREAMBLE_TRANSMISSION_COUNTER = *msgA-TransMax* + 1.

6.2.2A.3.1.2 Correct behaviour when receiving MsgB

The UE shall stop monitoring for MsgB, when the UE has successfully received the PDCCH addressed to UE as specified in clause 8.2A in TS 38.213 [3] containing a successRAR MAC subPDU or a fallbackRAR MAC subPDU as described in clause 5.1.4a in TS 38.321 [7].

If the UL CCA is successful, the UE shall send ACK if Success RAR is received in MsgB and the Contention Resolution is successful, as defined in clause 5.1.4a in TS 38.321 [7].

If MsgB contains a fallbackRAR MAC subPDU the UE shall fallback to the 4-step RA type by transmitting the msg3 containing the payload of MsgA PUSCH if the UL CCA is successful, and monitor contention resolution as described in clause 8.2A in TS 38.213 [3].

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power, if the UL CCA is successful on the next available PRACH occasion, when the backoff time expires unless the Random Access Response reception is considered as successful, as defined in clause 5.1.4a in TS 38.321 [7].

6.2.2A.3.1.3 Correct behaviour when not receiving MsgB

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2a in TS 38.321 [7], and if the UL CCA is successful, transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power if the UL CCA is successful on the next available PRACH occasion when the backoff time expires unless the Random Access Response reception is considered as successful, as defined in clause 5.1.4a in TS 38.321 [7].

6.2.2A.3.2 Non-Contention based random access

6.2.2A.3.2.1 Correct behaviour when transmitting MsgA

If the UL CCA is successful, if the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs is configured, with the UE selected SSB with SS-RSRP above *msgA-RSRP-ThresholdSSB* amongst the associated SSBs, UE shall have the capability to select the Random Access Preamble corresponding to the selected SSB, and to transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given first by the *msgA-SSB-SharedRO-MaskIndex* if configured, or next by the *ra-ssb-OccasionMaskIndex* if configured, and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2a in TS 38.321 [7].

In association with the MsgA PRACH, the UE should have the capability to transmit MsgA PUSCH, if the UL CCA is successful, on the corresponding PUSCH occasion associated with a DMRS resource, which is mapped from the MsgA PRACH occasion, and preamble index as defined in clause 8.1A in TS 38.213 [3].

If UE is configured *lbt-FailureRecoveryConfig* and is capable of *ul-LBT-FailureDetectionRecovery* [2] then upon detecting uplink CCA failure during the random access procedure for MsgA transmission, as outlined in Clause 5.21.2 of TS 38.321 [7], the UE shall have cancel the transmission of the MsgA payload on the associated PUSCH resource and perform the Random Access Resource selection procedure, as specified in clause 5.1.3a in TS 38.321 [7].

If UE is not configured *lbt-FailureRecoveryConfig* or is not capable of *ul-LBT-FailureDetectionRecovery* [2] then upon detecting uplink CCA failure during the random access procedure for MsgA transmission, as outlined in Clause 5.21.2 of TS 38.321 [7], the UE shall cancel the transmission of the MsgA payload on the associated PUSCH resource and increment PREAMBLE_TRANSMISSION_COUNTER by 1. The UE shall again perform the Random Access Resource selection procedure if PREAMBLE_TRANSMISSION_COUNTER < *preambleTransMax* + 1, as specified in clause 5.1.3a in TS 38.321 [7]. If the Random Access Procedure is not complete and the UE is configured with *msgA-TransMax* then, as specified in clause 5.1.3a in TS 38.321 [7], the UE shall perform the Random Access Resource selection procedure with 4-step RA type provided that PREAMBLE_TRANSMISSION_COUNTER = *msgA-TransMax* + 1.

6.2.2A.3.2.2 Correct behaviour when receiving MsgB

The UE may stop monitoring for MsgB, when the UE has successfully received the PDCCH addressed to UE as specified in clause 8.2A in TS 38.213 [3] containing a successRAR MAC subPDU or a fallbackRAR MAC subPDU as described in clause 5.1.4a in TS 38.321 [7].

If MsgB contains a fallbackRAR MAC subPDU the UE shall fallback to the 4-step RA type by transmitting the msg3 containing the payload of MsgA PUSCH if the UL CCA is successful, as described in clause 8.2A in TS 38.213 [3].

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2a in TS 38.321 [7] for the next available PRACH occasion, and transmit the preamble with the calculated MsgA PRACH and MsgA PUSCH transmission power if the UL CCA is successful, if all received MsgBs contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

6.2.2A.3.2.3 Correct behaviour when not receiving MsgB

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2a in TS 38.321 [7] for the next available PRACH occasion, and transmit MsgA with the calculated MsgA PRACH and MsgA PUSCH transmission power if the UL CCA is successful on the next available PRACH occasion, if no MsgB is received within the MsgB Response window configured in *RACH-ConfigGenericTwoStepRA* and the Random Access Response Reception has not been considered as successful as defined in clause 5.1.4a in TS 38.321 [7].

6.2.2B Random access for RedCap

6.2.2B.1 Introduction

This clause contains requirements on the RedCap UE regarding random access procedure. The random access procedure is initiated to establish uplink time synchronization for a UE which either has not acquired or has lost its uplink synchronization, or to convey UE's request Other SI, or for beam failure recovery. The random access is specified in clause 8 of TS 38.213 [3] and the control of the RACH transmission is specified in clause 5.1 of TS 38.321 [7]. Two types of procedure are defined for the random access, the 4-step RA type, and the 2-step RA type [7]. The decision on which type of procedure to adopt is as described in clause 5.1.1 of TS 38.321 [7].

The 1 Rx RedCap UE for performing the random access procedure defined in clause 5.1 [7] applies:

- *rsrp-ThresholdSSB* as the signaled value of *rsrp-ThresholdSSB* [2] + 1 dB.
- *msgA-RSRP-ThresholdSSB* as the signaled value of *msgA-RSRP-ThresholdSSB* [2] + 1 dB.
- msgA-RSRP-Threshold as the signaled value of msgA-RSRP-Threshold [2] + 1 dB.

6.2.2B.2 Requirements

The requirements for the 4-step RA type procedure described in clause 6.2.2.2 and the requirements for the 2-step RA type procedure described in the clause 6.2.2.3 are applicable for TDD and FDD RedCap UEs. The 4-step and 2-step RA

requirements for contention based random access defined in clause 6.2.2.2 and 6.2.2.3 respectively apply to HD-FDD UE with the following conditions:

- The RedCap UE operating in HD-FDD mode is not expected to perform PRACH transmission on a PRACH resource of a cell if UE has not received at least one SSB associated with that PRACH resource during the last Tp period in the cell, where Tp=160 ms.
- The RedCap UE operating in HD-FDD mode shall meet the PRACH requirements when performing PRACH transmission on a PRACH resource of a cell provided that the UE has received at least one SSB associated with that PRACH resource during the last Tp period before the PRACH transmission, where Tp=160 ms.

6.2.3 SA: RRC Connection Release with Redirection

6.2.3.1 Introduction

This clause contains requirements on the UE regarding RRC connection release with redirection procedure. RRC connection release with redirection is initiated by the *RRCRelease* message with redirection to E-UTRAN or NR from NR specified in TS 38.331 [2]. The RRC connection release with redirection procedure is specified in clause 5.3.8 of TS 38.331 [2].

In the requirements of clause 6.2.3.2, the term SMTC occasion not available at the UE refers to when the SMTC contains SSBs configured by gNB in a cell on a carrier frequency subject to CCA, but the first two successive candidate SSB positions for the same SSB index within the discovery burst transmission window are not available at the UE due to DL CCA failures at gNB during the corresponding identification period; otherwise the SMTC occasion is considered as available at the UE.

In the requirements of clause 6.2.3.2, the term PRACH occasion unavailable for transmission refers to when the PRACH occasion is configured by gNB but not transmitted by the UE during the corresponding period due to UL CCA failure at the UE.

When the RRC connection release with redirection is performed on a cell in FR2-2 with shared spectrum channel access, UE shall determine the CCA mode of the neighbour cell according to *channelAccessMode2-r17* if configured. If *channelAccessMode2-r17* of the cell is enabled, UE shall assume that CCA applies to the cell and perform measurement accordingly, and the requirements in clause 6.2.3.2.3 shall apply; otherwise, UE shall assume that CCA does not apply to the cell and perform measurement accordingly, and requirements in 6.2.3.2.1 shall apply.

6.2.3.2 Requirements

6.2.3.2.1 RRC connection release with redirection to NR

The UE shall be capable of performing the RRC connection release with redirection to the target NR cell within $T_{connection_release_redirect_NR}$.

The time delay ($T_{connection_release_redirect_NR}$) is the time between the end of the last slot containing the RRC command, "*RRCRelease*" (TS 38.331 [2]) on the NR PDSCH and the time the UE starts to send random access to the target NR cell. The time delay ($T_{connection_release_redirect_NR}$) shall be less than:

$$T_{connection_release_redirect_NR} = T_{RRC_procedure_delay} + T_{identify\text{-}NR} + T_{SI\text{-}NR} + T_{RACH}$$

The target NR cell shall be considered detetable when for each relevant SSB, the side conditions should be met that,

- the conditions of SSB_RP and SSB Ês/Iot according to Annex B.2.5 for a corresponding NR Band are fulfilled.

$T_{RRC_procedure_delay}$: It is the RRC procedure delay for processing the received message "*RRCRelease*" as defined in clause 6.2.2 of TS 38.331 [2].

$T_{identify\text{-}NR}$: It is the time to identify the target NR cell and depends on the FR of the target NR cell. It is defined in Table 6.2.3.2.1-1. Note that $T_{identify\text{-}NR} = T_{PSS/SSS\text{-}sync} + T_{meas}$, in which $T_{PSS/SSS\text{-}sync}$ is the cell search time and T_{meas} is the measurement time due to cell selection criteria evaluation.

T_{SI-NR}: It is the time required for acquiring all the relevant system information of the target NR cell. This time depends upon whether the UE is provided with the relevant system information of the target NR cell or not by the old NR cell before the RRC connection is released. $T_{RACH:}$ It is the delay uncertainty in acquiring the first available PRACH occasion in the target NR cell. T_{RACH} can be up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [3].

T_{rs} is the SMTC periodicity of the target NR cell if the UE has been provided with an SMTC configuration for the target cell in the redirection command, otherwise T_{rs} is the SMTC periodicity configured in the *measObjectNR* having the same SSB frequency and subcarrier spacing configured for the RRC connection release with redirection. If the measObjectNRs having the same SSB frequency and subcarrier spacing configured by MN and SN have different SMTC, T_{rs} is the periodicity of one of the SMTC which is up to UE implementation. If the UE is not provided with SMTC configuration or measurement object for the frequency which is also configured for the RRC connection release with redirection then:

- the requirement in this clause is applied with T_{rs} = 20 ms if the SSB transmission periodicity is not larger than 20 ms; otherwise,
- there is no requirement if the SSB transmission periodicity is larger than 20ms.

Table 6.2.3.2.1-1: Time to identify target NR cell for RRC connection release with redirection to NR

FR of target NR cell	$T_{identify-NR}$
FR1	MAX (680 ms, 11 x T_{rs})
FR2-1	MAX (880 ms, 8x11 x T_{rs})
FR2-2	MAX (880 ms, 12x11 x T_{rs})
Note: If the UE has been provided with higher layer signaling of *smtc2* specified in TS 38.331 [2] prior to the redirection command, T_{rs} follows *smtc1* or *smtc2* according to the physical cell ID of the target cell.	

6.2.3.2.2 RRC connection release with redirection to E-UTRAN

The UE shall be capable of performing the RRC connection release with redirection to the target E-UTRAN cell within $T_{connection_release_redirect_E-UTRA}$.

The time delay ($T_{connection_release_redirect_E-UTRA}$) is the time between the end of the last slot containing the RRC command, "*RRCRelease*" (TS 38.331 [2]) on the PDSCH and the time the UE starts to send random access to the target E-UTRA cell. The time delay ($T_{connection_release_redirect_E-UTRA}$) shall be less than:

$$T_{connection_release_redirect_E-UTRA} = T_{RRC_procedure_delay} + T_{identify-E-UTRA} + T_{SI-E-UTRA} + T_{RACH}$$

The target E-UTRA FDD or TDD cell shall be considered detectable provided the following conditions are fulfilled:

- the same conditions as for inter-frequency RSRP measurements specified in annex B.1.2 of TS 36.133 [15] are fulfilled for a corresponding Band, and
- the same conditions as for inter-frequency RSRQ measurements specified in annex B.1.2 of TS 36.133 [15] are fulfilled for a corresponding Band, and
- SCH conditions specified in annex B.1.2 of TS 36.133 [15] are fulfilled for a corresponding Band.

$T_{RRC_procedure_delay}$: It is the RRC procedure delay for processing the received message "*RRCRelease*" as defined in clause 6.2.2 of TS 38.331 [2].

$T_{identify-E-UTRA}$: It is the time to identify the target E-UTRA cell. It shall be less than 320 ms.

$T_{SI-E-UTRA}$: It is the time required for acquiring all the relevant system information of the target E-UTRA cell. This time depends upon whether the UE is provided with the relevant system information (SI) of the target E-UTRA cell or not by the old NR cell before the RRC connection is released.

T_{RACH}: It is the delay caused due to the random access procedure when sending random access to the target E-UTRA cell.

6.2.3.2.3 RRC connection release with redirection to NR carrier subject to CCA

The UE shall be capable of performing the RRC connection release with redirection to the target NR cell subject to CCA within $T_{connection_release_redirect_NR_CCA}$.

The time delay ($T_{connection_release_redirect_NR_CCA}$) is the time between the end of the last slot containing the RRC command, "*RRCRelease*" (TS 38.331 [2]) on the NR PDSCH and the time the UE starts to send random access to the target NR cell. The time delay ($T_{connection_release_redirect_NR_CCA}$) shall be less than:

$$T_{connection_release_redirect_NR_CCA} = T_{RRC_procedure_delay} + T_{identify\text{-}NR_CCA} + T_{SI\text{-}NR_CCA} + T_{RACH_CCA}$$

The target NR cell shall be considered detetable when for each relevant SSB, the side conditions should be met that,

- the conditions of SSB_RP and SSB $\hat{E}s/Iot$ according to Annex B.2.5 for a corresponding NR Band are fulfilled.

- $T_{RRC_procedure_delay}$: It is the RRC procedure delay for processing the received message "*RRCRelease*" as defined in clause 6.2.2 of TS 38.331 [2].

- $T_{identify\text{-}NR_CCA}$: It is the time to identify the target NR cell and is defined as:

- $T_{identify\text{-}NR_CCA} = T_{PSS/SSS\text{-}sync} + T_{meas}$; $T_{PSS/SSS\text{-}sync}$ is the cell search time and T_{meas} is the measurement time due to cell selection criteria evaluation.

- For FR1 target NR cell: $T_{identify\text{-}NR_CCA} = MAX\ (680\ ms, (L_1+11) \times T_{rs})$;

- For FR2-2 target NR cell: $T_{identify\text{-}NR_CCA} = MAX\ (880\ ms, N\times(L_1'+11) \times T_{rs})$;

  - where L_1 is the number of SMTC occasions not available at the UE due to DL CCA failures and L_1' is the number of SMTC occasion groups not available at the UE due to DL CCA failures. An SMTC occasion group consists of N consecutive SMTC occasions. An SMTC occasion group is not available, when at least one SMTC occasion in the group is not transmitted by the gNB. N is equal to 12. If $L_1 > L_{1,max}$ or $L_1' > L_{1,max}$ then the UE shall initiate cell selection procedures for the selected PLMN as defined in TS 38.304 [1]; where $L_{1,max}$ is defined in Table 6.2.3.2.3-1.

- $T_{SI\text{-}NR_CCA}$: It is the time required for acquiring all the relevant system information of the target NR cell. This time depends upon whether the UE is provided with the relevant system information of the target NR cell or not by the old NR cell before the RRC connection is released.

- T_{RACH_CCA}: It is the delay uncertainty in acquiring the first available PRACH occasion in the target NR cell:

- $T_{RACH_CCA} = (1+L_2)\times T_{SSB,RO} + 10\ ms\ T_{PRACH}$; where:

  - L_2 is the consecutive number of SSB to PRACH occasion association periods during which no PRACH occasion is available for PRACH transmission due to UL CCA failures. $L_2 = 0$ for Type 2C UL channel access procedure as defined in TS 37.213 [33].

  - $T_{SSB,RO}$ is the SSB to PRACH occasion association period as defined in the table 8.1-1 of TS 38.213 [3].

  - The value of L2 is limited by *PREAMBLE_TRANSMISSION_COUNTER*, which is increased when PRACH occasion is unavailable for PRACH transmission due to UL CCA failure as specified in TS 38.321 [7]. The UE behaviour when *PREAMBLE_TRANSMISSION_COUNTER* reaches the *preambleTransMax* is specified in TS 38.321 [7].

- T_{rs} is the SMTC periodicity of the target NR cell if the UE has been provided with an SMTC configuration for the target cell in the redirection command, otherwise T_{rs} is the SMTC periodicity configured in the *measObjectNR* having the same SSB frequency and subcarrier spacing configured for the RRC connection release with redirection. If the UE is not provided with SMTC configuration or measurement object for the frequency which is also configured for the RRC connection release with redirection then:

- the requirement in this clause is applied with $T_{rs} = 20$ ms if the SSB transmission periodicity is not larger than 20 ms;

- otherwise, there is no requirement if the SSB transmission periodicity is larger than 20ms.

Table 6.2.3.2.3-1: Maximum allowed number of missed SMTC occasions during cell identification

SMTC periodicity (T_{rs}) [ms]	Maximum allowed number of missed SMTC occasions ($L_{1,max}$)
$T_{rs} \leq 40$	8
$T_{rs} > 40$	4

6.2.3A SA: RRC Connection Release with Redirection for RedCap

6.2.3A.1 Introduction

This clause contains requirements on the RedCap UE regarding RRC connection release with redirection procedure. RRC connection release with redirection is initiated by the *RRCRelease* message with redirection to E-UTRAN or NR from NR specified in TS 38.331 [2]. The RRC connection release with redirection procedure is specified in clause 5.3.8 of TS 38.331 [2].

6.2.3A.2 Requirements

6.2.3A.2.1 RRC connection release with redirection to NR

The requirements in clause 6.2.3.2.1 shall apply for 2 Rx RedCap UE. For 1 Rx RedCap UE, the requirements defined in clause 6.2.3.2.1 shall apply except that:

- $T_{identify-NR}$ as specified in Table 6.2.3A.2.1-1.

Table 6.2.3A.2.1-1: Time to identify target NR cell for RRC connection release with redirection to NR

FR of target NR cell	$T_{identify-NR}$
FR1	MAX (680 ms, [12] x T_{rs})
Note: If the UE has been provided with higher layer signaling of *smtc2* specified in TS 38.331 [2] prior to the redirection command, T_{rs} follows *smtc1* or *smtc2* according to the physical cell ID of the target cell.	

The HD-FDD UE shall meet the RRC connection release with redirection requirements provided that SSB is available at the UE once every SMTC period during T_{search}.

When the Redcap specific initial BWP is configured for random access, $T_{connection_release_redirect_NR}$ in clause 6.2.3.2.1 is extended by 6ms.

6.2.3A.2.2 RRC connection release with redirection to E-UTRAN

The requirements in clause 6.2.3.2.2 shall apply.

6.2C RRC Connection Mobility Control for Satellite Access

6.2C.1 SA: RRC Re-establishment for Satellite Access

6.2C.1.1 Introduction

This clause contains requirements on the UE regarding RRC connection re-establishment procedure. RRC connection re-establishment is initiated when a UE in RRC_CONNECTED state on the carrier loses RRC connection due to any of failure cases, including radio link failure, handover failure, and RRC connection reconfiguration failure. The RRC connection re-establishment procedure is specified in clause [5.3.7] of TS 38.331 [2].

The requirements in this clause are applicable for RRC connection re-establishment to NR cell, which is served by satellite access node (SAN).

6.2C.1.2 Requirements

In RRC_CONNECTED state the UE shall be capable of sending *RRCReestablishmentRequest* message within $T_{re\text{-}establish_delay}$ seconds from the moment it detects a loss in RRC connection. The total RRC connection delay ($T_{re\text{-}establish_delay}$) shall be less than:

$$T_{re-establish_delay} = T_{UE_re-establish_delay} + T_{UL_grant}$$

T_{UL_grant}: It is the time required to acquire and process uplink grant from the target PCell. The uplink grant is required to transmit *RRCReestablishmentRequest* message.

The UE re-establishment delay ($T_{UE_re\text{-}establish_delay}$) is specified in clause 6.2C.1.2.1.

6.2C.1.2.1 UE Re-establishment delay requirement

The UE re-establishment delay ($T_{UE_re\text{-}establish_delay}$) is the time between the moments when any of the conditions requiring RRC re-establishment as defined in clause [5.3.7] in TS 38.331 [2] is detected by the UE and when the UE sends PRACH to the target PCell. The UE re-establishment delay ($T_{UE_re\text{-}establish_delay}$) requirement shall be less than:

$$T_{UE_re-establish_delay} = 50\ ms + T_{identify_intra_NR} + \sum_{i=1}^{N_{freq}-1} T_{identify_inter_NR,i} + T_{SI-NR} + T_{PRACH}$$

The intra-frequency target NR cell shall be considered detectable if each relevant SSB can satisfy that:

- SS-RSRP related side conditions given in clause 10.1.2 and 10.1.3 are fulfilled for a corresponding NR Band for FR1, and
- the conditions of SSB_RP and SSB Ês/Iot according to Annex B.2.x1 for a corresponding NR Band are fulfilled.

The inter-frequency target NR cell shall be considered detectable when for each relevant SSB:

- SS-RSRP related side conditions given in clause 10.1.4 are fulfilled for a corresponding NR Band for FR1, and
- the conditions of SSB_RP and SSB Ês/Iot according to Annex B.2.x2 for a corresponding NR Band are fulfilled.

$T_{identify_intra_NR}$: It is the time to identify the target intra-frequency NR cell and it depends on whether the target NR cell is known cell or unknown cell. If the UE is not configured with intra-frequency NR carrier for RRC re-establishment then $T_{identify_intra_NR}$=0; otherwise $T_{identify_intra_NR}$ shall not exceed the values defined in Table 6.2C.1.2.1-1.

$T_{identify_inter_NR,i}$: It is the time to identify the target inter-frequency NR cell on inter-frequency carrier *i* configured for RRC re-establishment and it depends on whether the target NR cell is known cell or unknown cell. $T_{identify_inter_NR,i}$ shall not exceed the values defined in Table 6.2C.1.2.1-2.

T_{SMTC}: It is the periodicity of the SMTC occasion configured for the intra-frequency carrier. If the UE has been provided with higher layer in TS 38.331 [2] signaling of *smtc2*, T_{smtc} follows *smtc1* or *smtc2* according to the physical cell ID of the target cell.

$T_{SMTC,i}$: It is the periodicity of the SMTC occasion configured for the inter-frequency carrier *i*. If it is not configured, the UE may assume that the target SSB periodicity is no larger than 20 ms.

$T_{SI\text{-}NR}$: It is the time required for receiving all the relevant system information according to the reception procedure and the RRC procedure delay of system information blocks defined in TS 38.331 [2] for the target NR cell.

T_{PRACH}: It is the delay uncertainty in acquiring the first available PRACH occasion in the target NR cell. T_{PRACH} can be up to the summation of SSB to PRACH occasion association period and [10] ms. SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [3].

N_{freq}: It is the total number of NR frequencies to be monitored for RRC re-establishment; N_{freq} = 1 if the target intra-frequency NR cell is known, else N_{freq} = 2 and $T_{identify_intra_NR}$ = 0 if the target inter-frequency NR cell is known.

There is no requirement if the target cell does not contain the UE context.

In the requirement defined in the below tables, the target FR1 cell is known if it has been meeting the relevant cell identification requirement during the last 5 seconds otherwise it is unknown.

The requirements in this clause apply provided that the ephemeris information provided by the serving cell for the target cell is valid during UE re-establishment delay ($T_{UE_re\text{-}establish_delay}$).

Table 6.2C.1.2.1-1: Time to identify target NR cell for RRC connection re-establishment to NR intra-frequency cell

Serving cell SSB Ês/Iot (dB)	FR of target NR cell	$T_{identify_intra_NR}$ [ms]	
		Known NR cell	Unknown NR cell
≥ -8	FR1	MAX (200 ms, 5 x T_{SMTC})	K_{multi_SMTC} * MAX (800 ms, 10 x T_{SMTC})
< -8	FR1	N/A	k * 800 ms Note1, 3
Note 1: The UE is not required to successfully identify a cell on any NR frequency layer when T_{SMTC} > 20 ms and serving cell SSB Ês/Iot < -8 dB.			
Note 2: K_{multi_SMTC} is defined in clause 9.2C.5.1.			
Note 3: k = 1 if the cells on the target frequency are served by GEO. k = (N+1) if the cells on the target frequency are served by LEO, where N is the number of different satellites associated to the list of configured neighbor cells in ntn-NeighCellConfigList and ntn-NeighCellConfigListExt.			

Table 6.2C.1.2.1-2: Time to identify target NR cell for RRC connection re-establishment to NR inter-frequency cell

Serving cell SSB Ês/Iot (dB)	FR of target NR cell	$T_{identify_inter_NR,\ i}$ [ms]	
		Known NR cell	Unknown NR cell
≥ -8	FR1	MAX (200 ms, 6 x $T_{SMTC,\ i}$)	K_satellite * MAX (800 ms, 13 x $T_{SMTC,\ i}$)
< -8	FR1	N/A	k * 800 ms Note1, 3
Note 1: The UE is not required to successfully identify a cell on any NR frequency layer when $T_{SMTC,i}$ > 20 ms and serving cell SSB Ês/Iot < -8 dB.			
Note 2: K_satellite is defined in clause 9.3C.4.			
Note 3: k = 1 if the cells on the target frequency are served by GEO. k = (N+1) if the cells on the target frequency are served by LEO, where N is the number of different satellites associated to the list of configured neighbor cells in ntn-NeighCellConfigList and ntn-NeighCellConfigListExt.			

6.2C.2 Random access for satellite access

6.2C.2.1 Introduction

This clause contains requirements on the UE regarding random access procedure. The random access procedure is initiated to establish uplink time synchronization for a UE which either has not acquired or has lost its uplink synchronization, or to convey UE's request Other SI, or for beam failure recovery. The random access is specified in clause 8 of TS 38.213 [3] and the control of the RACH transmission is specified in clause 5.1 of TS 38.321 [7]. Two types of procedure are defined for the random access, the 4-step RA type, and the 2-step RA type [7]. The decision on which type of procedure to adopt is as described in clause 5.1.1 of TS 38.321 [7]. The requirements for the 4-step RA type procedure are described in clause 6.2.2.2, whereas the requirements for the 2-step RA type procedure are described in the clause 6.2.2.3 of this specification.

6.2C.2.2 Requirements for 4-step RA type

The UE shall select the type of random access at initiation of the random access procedure based on network configuration, as specified in clause 5.1.1 in TS 38.321 [7].

The UE shall have capability to calculate PRACH transmission power according to the PRACH power formula defined in clause 7.4 of TS 38.213 [3] and apply this power level at the first preamble or additional preambles. The absolute power applied to the first preamble shall have an accuracy as specified in Table 6.3.4.2-1 of TS 38.101-1 [18] for FR1. The relative power applied to additional preambles shall have an accuracy as specified in Table 6.3.4.3-1 of TS 38.101-1 [18] for FR1.

The UE shall indicate a random access problem to upper layers if the maximum number of preamble transmission counter has been reached for the random access procedure on PCell or PSCell as specified in clause 5.1.4 in TS 38.321 [7].

The requirements in this clause apply for UE in SA operation mode.

6.2C.2.2.1 Contention based random access

6.2C.2.2.1.1 Correct behaviour when transmitting Random Access Preamble

With the UE selected SSB with SS-RSRP above *rsrp-ThresholdSSB*, UE shall have the capability to select a Random Access Preamble randomly with equal probability from the Random Access Preambles associated with the selected SSB if the association between Random Access Preambles and SSB is configured, as specified in clause 5.1.2 in TS 38.321 [7].

With the UE selected SSB with SS-RSRP above *rsrp-ThresholdSSB*, UE shall have the capability to transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex* if configured, if the association between PRACH occasions and SSBs is configured, and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2 in TS 38.321 [7].

6.2C.2.2.1.2 Correct behaviour when receiving Random Access Response

The UE may stop monitoring for Random Access Response(s) and shall transmit the msg3 if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

6.2C.2.2.1.3 Correct behaviour when not receiving Random Access Response

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window defined in clause 5.1.4 in TS 38.321 [7].

6.2C.2.2.1.4 Correct behaviour when receiving an UL grant for msg3 retransmission

The UE shall re-transmit the msg3 upon the reception of anUL grant for msg3 retransmission.

6.2C.2.2.1.5 SA: Correct behaviour when receiving a message over Temporary C-RNTI

The UE shall send ACK if the Contention Resolution is successful.

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires unless the received message includes a UE Contention Resolution Identity MAC control element and the UE Contention Resolution Identity included in the MAC control element matches the CCCH SDU transmitted in the uplink message.

6.2C.2.2.1.6 Correct behaviour when contention Resolution timer expires

The UE shall re-select a preamble and transmit with the calculated PRACH transmission power when the backoff time expires if the Contention Resolution Timer expires.

6.2C.2.2.2 Non-Contention based random access

6.2C.2.2.2.1 Correct behaviour when transmitting Random Access Preamble

If the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs is configured, with the UE selected SSB with SS-RSRP above *rsrp-ThresholdSSB* amongst the associated SSBs, UE shall have the capability to select the Random Access Preamble corresponding to the selected SSB, and to transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex* if configured, and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2 in TS 38.321 [7].

If the contention-free Random Access Resources and the contention-free PRACH occasions associated with CSI-RSs is configured, with the UE selected CSI-RS with CSI-RSRP above *rsrp-ThresholdCSI-RS* amongst the associated CSI-RSs, UE shall have the capability to select the Random Access Preamble corresponding to the selected CSI-RS, and to transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions in *ra-OccasionList* corresponding to the selected CSI-RS, and PRACH occasion shall be randomly selected with equal probability amongst the selected CSI-RS associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2 in TS 38.321 [7].

If the random access procedure is initialized for beam failure recovery and if the contention-free Random Access Resources and the contention-free PRACH occasions for beam failure recovery request associated with any of the SSBs and/or CSI-RSs is configured, UE shall have the capability to select the Random Access Preamble corresponding to the selected SSB with SS-RSRP above *rsrp-ThresholdSSB* amongst the associated SSBs or the selected CSI-RS with CSI-RSRP above *rsrp-ThresholdCSI-RS* amongst the associated CSI-RSs, and to transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex* if configured, or from the PRACH occasions in *ra-OccasionList* corresponding to the selected CSI-RS, and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB assocated PRACH occasions or the selected CSI-RS associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2 in TS 38.321 [7].

6.2C.2.2.2.2 Correct behaviour when receiving Random Access Response

The UE may stop monitoring for Random Access Response(s), if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble, unless the random access procedure is initialized for Other SI request from UE.

The UE may stop monitoring for Random Access Response(s) and shall monitor the Other SI transmission if the Random Access Response only contains a Random Access Preamble identifier which is corresponding to the transmitted Random Access Preamble and the random access procedure is initialized for SI request from UE, as specified in clause 5.1.4 in TS 38.321 [7].

The UE may stop monitoring for Random Access Response(s), if the contention-free Random Access Preamble for beam failure recovery request was transmitted and if the PDCCH addressed to UE's C-RNTI is received, as specified in clause 5.1.4 in TS 38.321 [7].

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [7] for the next available PRACH occasion, and transmit the preamble with the calculated PRACH transmission power if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

6.2C.2.2.2.3 Correct behaviour when not receiving Random Access Response

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [7] for the next available PRACH occasion, and transmit the preamble with the calculated PRACH transmission power, if no Random Access Response is received within the RA Response window configured in *RACH-ConfigCommon* or if no PDCCH addressed to UE's C-RNTI is received within the RA Response window configured in *BeamFailureRecoveryConfig*, as defined in clause 5.1.4 in TS 38.321 [7].

6.2C.2.3 Requirements for 2-step RA type

The UE shall select the type of random access at initiation of the random access procedure based on network configuration, as specified in clause 5.1.1 in TS 38.321 [7].

The UE shall have capability to calculate MsgA PRACH transmission power according to the PRACH power formula defined in clause 7.4 of TS 38.213 [3] and the MsgA PUSCH power formula of clause 7.1.1 of TS 38.213 [3] and apply this power level at the first MsgA or additional MsgA repetitions. The absolute power applied to the first preamble shall have an accuracy as specified in Table 6.3.4.2-1 of TS 38.101-1 [18] for frequency range 1 and in Table 6.3.4.2-1 of TS 38.101-2 [19] for frequency range 2. The relative power applied to additional preambles shall have an accuracy as specified in Table 6.3.4.3-1 of TS 38.101-1 [18] for frequency range 1 and clause 6.3.4.3 of TS38.101-2 [19] for frequency range 2.

The UE shall switch to 4-step RA type procedure if the MsgA transmission counter has exceeded *msgA-TransMax*, if configured, as specified in clause 5.1.4a of TS 38.321 [7]. The UE shall indicate a Random Access problem to upper

layers if the maximum number of preamble transmission counter has been reached for the random access procedure on PCell or PSCell as specified in clause 5.1.4a in TS 38.321 [7].

The requirements in this clause apply for UE in SA operation mode or any MR-DC operation mode.

6.2C.2.3.1 Contention based random access

6.2C.2.3.1.1 Correct behaviour when transmitting MsgA

With the UE selected SSB with SS-RSRP above *msgA-RSRP-ThresholdSSB*, the UE shall have the capability to select a Random Access Preamble randomly with equal probability from the Random Access Preambles associated with the selected SSB if the association between Random Access Preambles and SS blocks is configured, as specified in clause 5.1.2a in TS 38.321 [7].

With the UE selected SSB with SS-RSRP above *msgA-RSRP-ThresholdSSB*, UE shall have the capability to transmit MsgA PRACH on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given first by the *msgA-SSB-SharedRO-MaskIndex* if configured, or next by the *ra-ssb-OccasionMaskIndex* if configured, if the association between PRACH occasions and SSBs is configured.

The PRACH preamble and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2a in TS 38.321 [7].

In association with the MsgA PRACH, the UE should have the capability to transmit MsgA PUSCH on the corresponding PUSCH occasion associated with a DMRS resource, which is mapped from the MsgA PRACH ocasion, and preamble index as defined in clause 8.1A in TS 38.213 [3].

6.2C.2.3.1.2 Correct behaviour when receiving MsgB

The UE shall stop monitoring for MsgB, when the UE has successfully received the PDCCH addressed to UE as specified in clause 8.2A in TS 38.213 [3] containing a successRAR MAC subPDU or a fallbackRAR MAC subPDU as described in clause 5.1.4a in TS 38.321 [7].

The UE shall send ACK if Success RAR is received in MsgB and the Contention Resolution is successful, as defined in clause 5.1.4a in TS 38.321 [7].

If MsgB contains a fallbackRAR MAC subPDU the UE shall fallback to the 4-step RA type by transmitting the msg3 containing the payload of MsgA PUSCH and monitor contention resolution as described in clause 8.2A in TS 38.213 [3].

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires unless the Random Access Response reception is considered as successful, as defined in clause 5.1.4a in TS 38.321 [7].

6.2C.2.3.1.3 Correct behaviour when not receiving MsgB

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires unless the Random Access Response reception is considered as successful, as defined in clause 5.1.4a in TS 38.321 [7].

6.2C.2.3.2 Non-Contention based random access

6.2C.2.3.2.1 Correct behaviour when transmitting MsgA

If the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs is configured, with the UE selected SSB with SS-RSRP above *msgA-RSRP-ThresholdSSB* amongst the associated SSBs, UE shall have the capability to select the Random Access Preamble corresponding to the selected SSB, and to transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given first by the *msgA-SSB-SharedRO-MaskIndex* if configured, or next by the *ra-ssb-OccasionMaskIndex* if configured, and PRACH occasion shall be randomly selected with equal probability

amongst the selected SSB associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2a in TS 38.321 [7].

In association with the MsgA PRACH, the UE should have the capability to transmit MsgA PUSCH on the corresponding PUSCH occasion associated with a DMRS resource, which is mapped from the MsgA PRACH ocasion, and preamble index as defined in clause 8.1A in TS 38.213 [3].

6.2C.2.3.2.2 Correct behaviour when receiving MsgB

The UE may stop monitoring for MsgB, when the UE has successfully received the PDCCH addressed to UE as specified in clause 8.2A in TS 38.213 [3] containing a successRAR MAC subPDU or a fallbackRAR MAC subPDU as described in clause 5.1.4a in TS 38.321 [7].

If MsgB contains a fallbackRAR MAC subPDU the UE shall fallback to the 4-step RA type by transmitting the msg3 containing the payload of MsgA PUSCH as described in clause 8.2A in TS 38.213 [3].

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2a in TS 38.321 [7] for the next available PRACH occasion, and transmit the preamble with the calculated MsgA PRACH and MsgA PUSCH transmission power if all received MsgBs contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

6.2C.2.3.2.3 Correct behaviour when not receiving MsgB

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2a in TS 38.321 [7] for the next available PRACH occasion, and transmit MsgA with the calculated MsgA PRACH and MsgA PUSCH transmission power, if no MsgB is received within the MsgB Response window configured in *RACH-ConfigGenericTwoStepRA* and the Random Access Response Reception has not been considered as successful as defined in clause 5.1.4a in TS 38.321 [7].

6.2C.3 SA: RRC Connection Release with Redirection for Satellite Access

6.2C.3.1 Introduction

This clause contains requirements on the UE regarding RRC connection release with redirection procedure. RRC connection release with redirection is initiated by the *RRCRelease* message with redirection to NR from NR specified in TS 38.331 [2]. The RRC connection release with redirection procedure is specified in clause 5.3.8 of TS 38.331 [2].

6.2C.3.2 Requirements

6.2C.3.2.1 RRC connection release with redirection to NR

The UE shall be capable of performing the RRC connection release with redirection to the target NR cell within $T_{connection_release_redirect_NR}$.

The time delay ($T_{connection_release_redirect_NR}$) is the time between the end of the last slot containing the RRC command, "*RRCRelease*" (TS 38.331 [2]) on the NR PDSCH and the time the UE starts to send random access to the target NR cell. The time delay ($T_{connection_release_redirect_NR}$) shall be less than:

$$T_{connection_release_redirect_NR} = T_{RRC_procedure_delay} + T_{identify\text{-}NR} + T_{SI\text{-}NR} + T_{RACH}$$

The target NR cell shall be considered detetable when for each relevant SSB, the side conditions should be met that,

- the conditions of SSB_RP and SSB Ês/Iot according to Annex B.2.5 for a corresponding NR Band are fulfilled.
- $T_{RRC_procedure_delay}$: It is the RRC procedure delay for processing the received message "*RRCRelease*" as defined in clause 6.2.2 of TS 38.331 [2].
- $T_{identify\text{-}NR}$: It is the time to identify the target NR cell and depends on the FR of the target NR cell. It is defined in Table 6.2C.3.2.1-1. Note that $T_{identify\text{-}NR} = T_{PSS/SSS\text{-}sync} + T_{meas}$, in which $T_{PSS/SSS\text{-}sync}$ is the cell search time and T_{meas} is the measurement time due to cell selection criteria evaluation.

- T_{SI-NR}: It is the time required for acquiring all the relevant system information of the target NR cell. This time depends upon whether the UE is provided with the relevant system information of the target NR cell or not by the old NR cell before the RRC connection is released. $T_{RACH:}$ It is the delay uncertainty in acquiring the first available PRACH occasion in the target NR cell. T_{RACH} can be up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [3].

- T_{rs} is the SMTC periodicity of the target NR cell if the UE has been provided with an SMTC configuration for the target cell in the redirection command, otherwise T_{rs} is the SMTC periodicity configured in the *measObjectNR* having the same SSB frequency and subcarrier spacing configured for the RRC connection release with redirection. If the measObjectNRs having the same SSB frequency and subcarrier spacing configured by MN and SN have different SMTC, T_{rs} is the periodicity of one of the SMTC which is up to UE implementation. If the UE is not provided with SMTC configuration or measurement object for the frequency which is also configured for the RRC connection release with redirection then:

- the requirement in this clause is applied with T_{rs} = 20 ms if the SSB transmission periodicity is not larger than 20 ms; otherwise,

- there is no requirement if the SSB transmission periodicity is larger than 20ms.

The requirements in this clause apply provided that the ephemeris information provided by the serving cell for the target cell is valid during time delay ($T_{connection_release_redirect_NR}$).

Table 6.2C.3.2.1-1: Time to identify target NR cell for RRC connection release with redirection to NR

FR of target NR cell	$T_{identify-NR}$
FR1	K_satellite * MAX (680 ms, 11 x T_{rs})
Note 1: If the UE has been provided with higher layer signaling of *smtc2* specified in TS 38.331 [2] prior to the redirection command, T_{rs} follows *smtc1* or *smtc2* according to the physical cell ID of the target cell.	
Note 2: K_satellite is defined in clause 9.3C.4.	

7 Timing

7.1 UE transmit timing

7.1.1 Introduction

The UE shall have capability to follow the frame timing change of the reference cell in connected state or when transmiting PUSCH on CG resources for SDT in RRC_Inactive. The uplink frame transmission takes place $(N_{TA} + N_{TA\ offset}) \times T_c$ before the reception of the first detected path (in time) of the corresponding downlink frame from the reference cell. For serving cell(s) in pTAG, UE shall use the SpCell as the reference cell for deriving the UE transmit timing for cells in the pTAG. For serving cell(s) in sTAG, UE shall use any of the activated SCells as the reference cell for deriving the UE transmit timing for the cells in the sTAG. UE initial transmit timing accuracy and gradual timing adjustment requirements are defined in the following requirements.

In the requirements of clause 7.1.2, the term reference cell on a carrier frequency subject to CCA is not available at the UE refers to when at least one SSB is configured by gNB, but the first two successive candidate SSB positions for the same SSB index within the discovery burst transmission window are not available during at least one discovery burst transmission window, at the UE due to DL CCA failures at gNB during the last 1280 ms; otherwise the reference cell on the carrier frequency subject to CCA is considered as available at the UE.

7.1.2 Requirements

The UE initial transmission timing error shall be less than or equal to $\pm T_e$ where the timing error limit value T_e is specified in Table 7.1.2-1. This requirement applies:

- when it is the first transmission in a DRX cycle for PUCCH, PUSCH and SRS, or it is the PRACH transmission, or it is the msgA transmission, or it is the first transmission sent on the PSCell for activating the deactivated SCG without RACH.

- when it is the transmission for PUSCH on CG resources for SDT in RRC_Inactive.

When the UL SCS is 120 kHz or smaller, the UE shall meet the Te requirement for an initial transmission provided that at least one SSB is available at the UE during the last 160 ms. When the UL SCS is 480 kHz the UE shall meet the Te requirement for an initial transmission provided that at least one SSB is available in the last 80 ms. When the UL SCS is 960 kHz the UE shall meet the Te requirement for an initial transmission provided that at least one SSB is available in the last 40 ms. The reference point for the UE initial transmit timing control requirement shall be the downlink timing of the reference cell minus $(N_{\mathrm{TA}} + N_{\mathrm{TA\ offset}})\times T_{\mathrm{c}}$. The downlink timing is defined as the time when the first path (in time) of the corresponding downlink frame used by the UE to determine downlink timing is received from the reference cell at the UE antenna. N_{TA} for PRACH is defined as 0.

$(N_{\mathrm{TA}} + N_{\mathrm{TA\ offset}})\times T_{\mathrm{c}}$ (in T_c units) for other channels is the difference between UE transmission timing and the downlink timing immediately after when the last timing advance in clause 7.3 was applied. N_{TA} for other channels is not changed until next timing advance is received. The value of $N_{\mathrm{TA\ offset}}$ depends on the duplex mode of the cell in which the uplink transmission takes place and the frequency range (FR). $N_{\mathrm{TA\ offset}}$ is defined in Table 7.1.2-2.

Table 7.1.2-1: T_e Timing Error Limit

Frequency Range	SCS of SSB signals (kHz)	SCS of uplink signals (kHz)	T_e
1	15	15	12*64*T_c
		30	10*64*T_c
		60	10*64*T_c
	30	15	8*64*T_c
		30	8*64*T_c
		60	7*64*T_c
2-1	120	60	3.5*64*T_c
		120	3.5*64*T_c
	240	60	3*64*T_c
		120	3*64*T_c
2-2	120	120	3.5*64*T_c
		480	[1.58]*64*T_c
	480	120	2.86*64*T_c
		480	[1.35]*64*T_c
		960	[0.90]*64*T_c
	960	120	2.80*64*T_c
		480	[1.13]*64*T_c
		960	[0.86]*64*T_c
Note 1: T_c is the basic timing unit defined in TS 38.211 [6]			

Table 7.1.2-2: The Value of $N_{\mathrm{TA\ offset}}$

Frequency range and band of cell used for uplink transmission	$N_{\mathrm{TA\ offset}}$ (Unit: T_C)
FR1 FDD or TDD band with neither E-UTRA–NR nor NB-IoT–NR coexistence case	25600 (Note 1)
FR1 FDD band with E-UTRA–NR and/or NB-IoT–NR coexistence case	0 (Note 1)
FR1 TDD band with E-UTRA–NR and/or NB-IoT–NR coexistence case	39936 (Note 1)
FR2	13792

Note 1:	The UE identifies $N_{\text{TA offset}}$ based on the information n-TimingAdvanceOffset as specified in TS 38.331 [2]. If UE is not provided with the information n-TimingAdvanceOffset, the default value of $N_{\text{TA offset}}$ is set as 25600 for FR1 band. In case of multiple UL carriers in the same TAG, UE expects that the same value of n-TimingAdvanceOffset is provided for all the UL carriers according to clause 4.2 in TS 38.213 [3] and the value 39936 of $N_{\text{TA offset}}$ can also be provided for a FDD serving cell.
Note 2:	Void

When it is not the first transmission in a DRX cycle or there is no DRX cycle, and when it is the transmission for PUCCH, PUSCH and SRS transmission, the UE shall be capable of changing the transmission timing according to the received downlink frame of the reference cell except when the timing advance in clause 7.3 is applied.

Table 7.1.2-3: void

If the UE uses a reference cell on a carrier frequency subject to CCA for deriving the UE transmit timing, then the UE shall meet all the transmit timing requirements defined in clause 7.1.2 provided that the reference cell is available at the UE. If the reference cell is not available at the UE on a carrier frequency subject to CCA, then the UE is allowed to transmit in the uplink provided that the UE meets all the transmit timing requirements defined in clause 7.1.2; otherwise the UE shall not transmit any uplink signal.

If a reference cell on a carrier frequency belonging to the PTAG, which is subject to CCA, is not available at the UE then the UE is allowed to use any of available activated SCell(s) at the UE in PTAG as a new reference cell. If the SCell used as reference cell is deactivated, or becomes not available, the UE is allowed to use another active serving cell in PTAG as new reference cell.

If a reference cell on a carrier frequency belonging to the STAG, which is subject to CCA is not available at the UE then the UE is allowed to use any of available activated SCell(s) at the UE in STAG as a new reference cell.

7.1.2.1 Gradual timing adjustment

Requirements in this section shall apply regardless of whether the reference cell is on a carrier frequency subject to CCA or not.

When the transmission timing error between the UE and the reference timing exceeds $\pm T_e$ then the UE is required to adjust its timing to within $\pm T_e$. The reference timing shall be $(N_{\text{TA}} + N_{\text{TA offset}}) \times T_c$ before the downlink timing of the reference cell. All adjustments made to the UE uplink timing shall follow these rules:

1) The maximum amount of the magnitude of the timing change in one adjustment shall be T_q.

2) The minimum aggregate adjustment rate shall be T_p per second.

3) The maximum aggregate adjustment rate shall be T_q per 200 ms for SCS of UL signals smaller or equal to 120 kHz and 100 ms for SCS of upling signals larger or equal to 480 kHz.

   where the maximum autonomous time adjustment step T_q and the aggregate adjustment rate T_p are specified in Table 7.1.2.1-1.

Table 7.1.2.1-1: T_q Maximum Autonomous Time Adjustment Step and T_p Minimum Aggregate Adjustment rate

Frequency Range	SCS of uplink signals (kHz)	T_q	T_p
1	15	$5.5*64*T_c$	$5.5*64*T_c$
	30	$5.5*64*T_c$	$5.5*64*T_c$
	60	$5.5*64*T_c$	$5.5*64*T_c$
2-1	60	$K*64*T_c$	$2.5*64*T_c$
	120	$K*64*T_c$	$2.5*64*T_c$
2-2	120	$2.5*64*T_c$	$2.5*64*T_c$
	480	$[0.8]*64*T_c$	$[0.8]*64*T_c$

	960	[0.8]*64*T_c	[0.8]*64*T_c
NOTE 1: T_c is the basic timing unit defined in TS 38.211 [6] NOTE 2: When *highSpeedMeasFlagFR2-r17* is configured for UE supporting power class 6, K = 4.5; otherwise, K = 2.5.			

7.1.2.2 Void

Table 7.1.2.2-1: Void

7.1.2.3 One shot large UL timing adjustment for FR2 Power Class 6 UE

When *highSpeedMeasFlagFR2-r17* is configured and *highSpeedLargeOneStepUL-TimingFR2-r17* is enabled for UE supporting FR2 power class 6 and [*largeOneStepUL-timingFR2-r17*] capability, the following requirements apply to the UE:

- If the absolute value $|T_{old} - T_{new}| \leq CP/4$, the requirement in clause 7.1.2.1 apply to the first UL transmission after a TCI state switch.
- Otherwise, the UE transmit timing immediately after TCI state switch shall be $T_{new} - (N_{TA} + N_{TA\,offset}) + 2\times(T_{old} - T_{new})$ and clause 7.1.2.1 requirements don't apply.
  - The UE UL transmission timing error after the TCI state switching procedure shall be less than or equal to $\pm T_e$ as specified in clause 7.1.2 if the new target TCI state is within active TCI state list, otherwise $\pm 7*64*T_c$, and the reference point is $T_{new} - (N_{TA} + N_{TA\,offset}) + 2\times(T_{old} - T_{new})$.

Above,

- T_{new} (in T_c units) is the DL timing defined as the time when UE receives downlink frame with new target TCI state.
- T_{old} (in T_c units) is the DL timing defined as the time when UE receives downlink frame with old source TCI state.

7.1A UE transmit timing for RedCap

7.1A.1 Introduction

The UE shall have capability to follow the frame timing change of the reference cell in connected state or when transmiting PUSCH on CG resources for SDT in RRC_Inactive. The uplink frame transmission takes place $(N_{\mathrm{TA}} + N_{\mathrm{TA\ offset}}) \times T_c$ before the reception of the first detected path (in time) of the corresponding downlink frame from the reference cell. UE initial transmit timing accuracy and gradual timing adjustment requirements are defined in the following requirements.

7.1A.2 Requirements

The UE initial transmission timing error shall be less than or equal to $\pm T_e$ where the timing error limit value T_e is specified in Table 7.1A.2-1. This requirement applies:

- when it is the first transmission in a DRX cycle for PUCCH, PUSCH and SRS, or it is the PRACH transmission, or it is the msgA transmission.
- when it is the transmission for PUSCH on CG resources for SDT in RRC_Inactive.

The UE shall meet the Te requirement for an initial transmission provided that at least one SSB (CD-SSB or NCD-SSB) is available at the UE for acquiring the frame timing of the reference cell during the last 160 ms on the condition that:

- the SSB is within the UE's active BWP, or

- the SSB is not within the UE's active BWP, and the measurement gap is configured.

The reference point for the UE initial transmit timing control requirement shall be the downlink timing of the reference cell minus $(N_{\text{TA}} + N_{\text{TA offset}})\times T_{\text{c}}$. The downlink timing is defined as the time when the first ~~detected~~ path (in time) of the corresponding downlink frame used by the UE to determine downlink timing is received from the reference cell at UE antenna. N_{TA} for PRACH is defined as 0.

$(N_{\text{TA}} + N_{\text{TA offset}})\times T_{\text{c}}$ (in T_c units) for other channels is the difference between UE transmission timing and the downlink timing immediately after when the last timing advance in clause 7.3A was applied. N_{TA} for other channels is not changed until next timing advance is received. The value of $N_{\text{TA offset}}$ depends on the duplex mode of the cell in which the uplink transmission takes place and the frequency range (FR). $N_{\text{TA offset}}$ is defined in Table 7.1A.2-2.

Table 7.1A.2-1: T_e Timing Error Limit

Frequency Range	SCS of SSB signals (kHz)	SCS of uplink signals (kHz)	T_e
1	15	15	12*64*T_c
		30	10*64*T_c
		60	10*64*T_c
	30	15	8*64*T_c
		30	8*64*T_c
		60	7*64*T_c
2	120	60	3.5*64*T_c
		120	3.5*64*T_c
	240	60	3*64*T_c
		120	3*64*T_c
Note 1: T_c is the basic timing unit defined in TS 38.211 [6]			

Table 7.1A.2-2: The Value of $N_{\text{TA offset}}$

Frequency range and band of cell used for uplink transmission	$N_{\text{TA offset}}$ (Unit: T_C)
FR1 FDD or TDD band with neither E-UTRA–NR nor NB-IoT–NR coexistence case	25600 (Note 1)
FR1 FDD band with E-UTRA–NR and/or NB-IoT–NR coexistence case	0 (Note 1)
FR1 TDD band with E-UTRA–NR and/or NB-IoT–NR coexistence case	39936 (Note 1)
FR2	13792
Note 1: The UE identifies $N_{\text{TA offset}}$ based on the information n-TimingAdvanceOffset as specified in TS 38.331 [2]. If UE is not provided with the information n-TimingAdvanceOffset, the default value of $N_{\text{TA offset}}$ is set as 25600 for FR1 band. Note 2: Void	

When it is not the first transmission in a DRX cycle or there is no DRX cycle, and when it is the transmission for PUCCH, PUSCH and SRS transmission, the UE shall be capable of changing the transmission timing according to the received downlink frame of the reference cell except when the timing advance in clause 7.3A is applied.

7.1A.2.1 Gradual timing adjustment

When the transmission timing error between the UE and the reference timing exceeds $\pm T_e$ then the UE is required to adjust its timing to within $\pm T_e$. The reference timing shall be $(N_{\text{TA}} + N_{\text{TA offset}})\times T_{\text{c}}$ before the downlink timing of the reference cell. All adjustments made to the UE uplink timing shall follow these rules:

1) The maximum amount of the magnitude of the timing change in one adjustment shall be T_q.

2) The minimum aggregate adjustment rate shall be T_p per second.

3) The maximum aggregate adjustment rate shall be T_q per 200 ms.

where the maximum autonomous time adjustment step T_q and the aggregate adjustment rate T_p are specified in Table 7.1A.2.1-1.

Table 7.1A.2.1-1: T_q Maximum Autonomous Time Adjustment Step and T_p Minimum Aggregate Adjustment rate

Frequency Range	SCS of uplink signals (kHz)	T_q	T_p
1	15	5.5*64*T_c	5.5*64*T_c
	30	5.5*64*T_c	5.5*64*T_c
	60	5.5*64*T_c	5.5*64*T_c
2	60	2.5*64*T_c	2.5*64*T_c
	120	2.5*64*T_c	2.5*64*T_c
NOTE: T_c is the basic timing unit defined in TS 38.211 [6]			

7.1C UE transmit timing for Satellite Access

7.1C.1 Introduction

The UE shall have capability to follow the frame timing change of the reference cell in connected state. The uplink frame transmission takes place $\left(N_{\text{TA}} + N_{\text{TA-offset}} + N_{\text{TA,adj}}^{\text{common}} + N_{\text{TA,adj}}^{\text{UE}}\right) \times T_c$ before the reception of the first detected path (in time) of the corresponding downlink frame from the reference cell. UE initial transmit timing accuracy and gradual timing adjustment requirements are defined in the following requirements.

7.1C.2 Requirements

The UE initial transmission timing error shall be less than or equal to $\pm T_{e_NTN}$ where the timing error limit value T_{e_NTN} is specified in Table 7.1C.2-1. This requirement applies:

- when it is the first transmission in a DRX cycle for PUCCH, PUSCH and SRS, or it is the PRACH transmission, or it is the msgA transmission..

The UE shall meet the T_{e_NTN} requirement for an initial transmission provided that at least one SSB is available at the UE during the last 160 ms. and the UE has a validity time running for $N_{\text{TA,common}}$ and $N_{\text{TA,UE-specific}}$. The reference point for the UE initial transmit timing control requirement shall be the downlink timing of the reference cell minus $\left(N_{\text{TA}} + N_{\text{TA-offset}} + N_{\text{TA,adj}}^{\text{common}} + N_{\text{TA,adj}}^{\text{UE}}\right) \times T_c$.

The downlink timing is defined as the time when the first path (in time) of the corresponding downlink frame used by the UE to determine downlink timing is received from the reference cell at the UE antenna.

N_{TA} for PRACH is defined as 0. $\left(N_{\text{TA}} + N_{\text{TA-offset}} + N_{\text{TA,adj}}^{\text{common}} + N_{\text{TA,adj}}^{\text{UE}}\right) \times T_c$ (in T_c units) for other channels is the difference between UE transmission timing and the downlink timing immediately after when the last timing advance in clause 7.3 was applied. or after the last update in $N_{\text{TA,adj}}^{\text{common}}$ or $N_{\text{TA,adj}}^{\text{UE}}$.

The value of $N_{\text{TA-offset}}$ depends on the duplex mode of the cell in which the uplink transmission takes place and the frequency range (FR). $N_{\text{TA-offset}}$ is defined in Table 7.1.2-2.

$N_{\text{TA,adj}}^{\text{common}}$ and $N_{\text{TA,adj}}^{\text{UE}}$ are as defined in TS38.211 [6].

Table 7.1C.2-1: T_{e_NTN} Timing Error Limit

Frequency Range	SCS of SSB signals (kHz)	SCS of uplink signals (kHz)	T_{e_NTN}
1	15	15	29*64*T_c
		30	24*64*T_c
		60	N/A

	30	15	24*64*T_c
		30	22*64*T_c
		60	N/A
Note 1: T_c is the basic timing unit defined in TS 38.211 [6]			

When it is not the first transmission in a DRX cycle or there is no DRX cycle, and when it is the transmission for PUCCH, PUSCH and SRS transmission, the UE shall be capable of changing the transmission timing according to the received downlink frame of the reference cell, the updating of $N_{\mathrm{TA,adj}}^{\mathrm{common}}$ and the updating of $N_{\mathrm{TA,adj}}^{\mathrm{UE}}$, except when the timing advance in clause 7.3C is applied.

7.1C.2.1 Gradual timing adjustment

When the transmission timing error between the UE and the reference timing exceeds $\pm T_{e_NTN}$ then the UE is required to adjust its timing to within $\pm T_{e_NTN}$. The reference timing shall be $\left(N_{\mathrm{TA}} + N_{\mathrm{TA\text{-}offset}} + N_{\mathrm{TA,adj}}^{\mathrm{common}} + N_{\mathrm{TA,adj}}^{\mathrm{UE}}\right) \times T_c$ before the downlink timing of the reference cell. All adjustments made to the UE uplink timing shall follow these rules:

1) The maximum amount of the magnitude of the timing change, apart from a change of $N_{\mathrm{TA,adj}}^{\mathrm{UE}}$ due to satellite position update and $N_{\mathrm{TA,adj}}^{\mathrm{common}}$ between the previous transmission and the current transmission, in one adjustment shall be T_{q_NTN}.

2) The minimum aggregate adjustment rate, apart from a change of $N_{\mathrm{TA,adj}}^{\mathrm{UE}}$ due to satellite position update and $N_{\mathrm{TA,adj}}^{\mathrm{common}}$ during the last one second, shall be T_{p_NTN} per second.

3) The maximum aggregate adjustment rate, apart from a change of $N_{\mathrm{TA,adj}}^{\mathrm{UE}}$ due to satellite position update and $N_{\mathrm{TA,adj}}^{\mathrm{common}}$ during the last 200ms, shall be T_{q_NTN} per 200 ms.

Where, the maximum autonomous time adjustment step T_{q_NTN} and the aggregate adjustment rate T_{p_NTN} are specified in Table 7.1C.2.1-1.

Table 7.1C.2.1-1: T_{q_NTN} Maximum Autonomous Time Adjustment Step and T_{p_NTN} Minimum Aggregate Adjustment rate

Frequency Range	SCS of uplink signals (kHz)	T_{q_NTN}	T_{p_NTN}
1	15	5.5*64*T_c	5.5*64*T_c
	30	5.5*64*T_c	5.5*64*T_c
	60	N/A	N/A
NOTE: T_c is the basic timing unit defined in TS 38.211 [6]			

7.2 UE timer accuracy

7.2.1 Introduction

UE timers are used in different protocol entities to control the UE behaviour.

7.2.2 Requirements

For UE timers specified in TS 38.331 [2], the UE shall comply with the timer accuracies according to Table 7.2.2-1.

The requirements are only related to the actual timing measurements internally in the UE. They do not include the following:

- Inaccuracy in the start and stop conditions of a timer (e.g. UE reaction time to detect that start and stop conditions of a timer is fulfilled), or

- Inaccuracies due to restrictions in observability of start and stop conditions of a UE timer (e.g. slot alignment when UE sends messages at timer expiry).

Table 7.2.2-1

Timer value [s]	Accuracy
timer value < 4	± 0.1s
timer value ≥ 4	± 2.5%

7.2A UE timer accuracy for RedCap

7.2A.1 Introduction

UE timers are used in different protocol entities to control the UE behaviour.

7.2A.2 Requirements

For UE timers specified in TS 38.331 [2], the UE shall comply with the timer accuracies according to Table 7.2A.2-1.

The requirements are only related to the actual timing measurements internally in the UE. They do not include the following:

- Inaccuracy in the start and stop conditions of a timer (e.g. UE reaction time to detect that start and stop conditions of a timer is fulfilled), or

- Inaccuracies due to restrictions in observability of start and stop conditions of a UE timer (e.g. slot alignment when UE sends messages at timer expiry).

Table 7.2A.2-1

Timer value [s]	Accuracy
timer value < 4	± 0.1s
timer value ≥ 4	± 2.5%

7.2C UE timer accuracy for satellite access

7.2C.1 Introduction

UE timers are used in different protocol entities to control the UE behaviour.

7.2C.2 Requirements

For UE timers specified in TS 38.331 [2], the UE shall comply with the timer accuracies according to Table 7.2C.2-1.

The requirements are only related to the actual timing measurements internally in the UE. They do not include the following:

- Inaccuracy in the start and stop conditions of a timer (e.g. UE reaction time to detect that start and stop conditions of a timer is fulfilled), or

- Inaccuracies due to restrictions in observability of start and stop conditions of a UE timer (e.g. slot alignment when UE sends messages at timer expiry).

Table 7.2C.2-1

Timer value [s]	Accuracy
timer value < 4	± 0.1s

timer value ≥ 4	± 2.5%

7.3 Timing advance

7.3.1 Introduction

The timing advance is initiated from gNB to UE in EN-DC, NR-DC, NE-DC and NR SA operation modes, with MAC message that implies the adjustment of the timing advance, as defined in clause 5.2 of TS 38.321 [7].

7.3.2 Requirements

7.3.2.1 Timing Advance adjustment delay

UE shall adjust the timing of its uplink transmission timing at time slot *n+ k+1* for a timing advance command received in time slot *n*, and the value of *k* is defined in clause 4.2 in TS 38.213 [3]. The same requirement applies also when the UE is not able to transmit a configured uplink transmission due to the channel assessment procedure.

7.3.2.2 Timing Advance adjustment accuracy

The UE shall adjust the timing of its transmissions with a relative accuracy better than or equal to the UE Timing Advance adjustment accuracy requirement in Table 7.3.2.2-1, to the signalled timing advance value compared to the timing of preceding uplink transmission. The timing advance command step is defined in TS 38.213 [3].

Table 7.3.2.2-1: UE Timing Advance adjustment accuracy

UL Sub Carrier Spacing(kHz)	15	30	60	120	480	960
UE Timing Advance adjustment accuracy	±256 T_c	±256 T_c	±128 T_c	±32 T_c	±10 T_c	±6 T_c

7.3A Timing Advance for RedCap

7.3A.1 Introduction

The timing advance is initiated from gNB to UE configured with only PCell, with MAC message that implies the adjustment of the timing advance, as defined in clause 5.2 of TS 38.321 [7].

7.3A.2 Requirements

7.3A.2.1 Timing Advance adjustment delay

UE shall adjust the timing of its uplink transmission at time slot *n+ k+1* for a timing advance command received in time slot *n*, and the value of *k* is defined in clause 4.2 in TS 38.213 [3]. The same requirement applies also when the UE is not able to transmit a configured uplink transmission due to the channel assessment procedure.

7.3A.2.2 Timing Advance adjustment accuracy

The UE shall adjust the timing of its transmissions with a relative accuracy better than or equal to the UE Timing Advance adjustment accuracy requirement in Table 7.3A.2.2-1, to the signalled timing advance value compared to the timing of preceding uplink transmission. The timing advance command step is defined in TS 38.213 [3].

Table 7.3A.2.2-1: UE Timing Advance adjustment accuracy

UL Sub Carrier Spacing(kHz)	15	30	60	120
UE Timing Advance adjustment accuracy	±256 T_c	±256 T_c	±128 T_c	±32 T_c

7.3C Timing advance for satellite access

7.3C.1 Introduction

The timing advance is initiated by UE configured with only PCell served by SAN, upon initiating a validity timer for $N_{\mathrm{TA,adj}}^{\mathrm{common}}$ and $N_{\mathrm{TA,adj}}^{\mathrm{UE}}$. The timing advance can be adjusted with MAC message that implies the adjustment of the timing advance, as defined in clause 5.2 of TS 38.321 [7].

7.3C.2 Requirements

7.3C.2.1 Timing Advance adjustment delay

UE shall adjust the timing of its uplink transmission timing from the beginning of uplink at time slot $n+ k+1+2^{\mu} \cdot K_{\mathrm{offset}}$ for a timing advance command received in time slot n, and the value of k, μ and K_{offset} are defined in clause 4.2 in TS 38.213 [3]. The same requirement applies also when the UE is not able to transmit a configured uplink transmission due to the channel assessment procedure.

7.3C.2.2 Timing Advance adjustment accuracy

The UE shall adjust the timing of its transmissions, apart from a change of $N_{\mathrm{TA,adj}}^{\mathrm{UE}}$ and $N_{\mathrm{TA,adj}}^{\mathrm{common}}$ between the preceding uplink transmission and the current transmission, with a relative accuracy better than or equal to the UE Timing Advance adjustment accuracy requirement in Table 7.3C.2.2-1, to the signalled timing advance value compared to the timing of preceding uplink transmission. The timing advance command step is defined in TS 38.213 [3].

Table 7.3C.2.2-1: UE Timing Advance adjustment accuracy

UL Sub Carrier Spacing(kHz)	15	30	60
UE Timing Advance adjustment accuracy	±256 T_c	±256 T_c	N/A

Editor's Note: it would be further clairified with the additional conditions for TA adjustment accuracy requirement for satellite access

7.4 Cell phase synchronization accuracy

7.4.1 Definition

Cell phase synchronization accuracy for TDD is defined as the maximum absolute deviation in frame start timing between any pair of cells on the same frequency that have overlapping coverage areas.

7.4.2 Minimum requirements

The cell phase synchronization accuracy measured at BS antenna connectors or radiated interface boundaries shall be better than 3 µs.

7.5 Maximum Transmission Timing Difference

7.5.1 Introduction

A UE shall be capable of handling a relative transmission timing difference between subframe timing boundary of E-UTRA PCell and the closest slot timing boundary of PSCell to be aggregated for EN-DC operation.

A UE shall be capable of handling a relative transmission timing difference among the closest slot timing boundaries of different carriers in FR1 and/or FR2-1 to be aggregated in NR carrier aggregation.

A UE shall be capable of handling a relative transmission timing difference among the closest subframe timing boundaries of different carriers to be aggregated in FR1 and FR2-2 NR inter-band carrier aggregation.

A UE shall be capable of handling a relative transmission timing difference between slot timing boundary of PCell and subframe timing boundary of E-UTRA PSCell to be aggregated for NE-DC operation.

A UE shall be capable of handling a relative transmission timing difference between slot timing boundaries of PCell in FR1 or FR2-1 and the closest slot timing boundary of PSCell in FR1 or FR2-1 to be aggregated in NR DC operation.

A UE shall be capable of handling a relative transmission timing difference between subframe timing boundaries of PCell in FR1 and the closest subframe timing boundary of PSCell in FR2-2 to be aggregated in NR DC operation.

7.5.2 Minimum Requirements for inter-band EN-DC

The UE shall be capable of handling a maximum uplink transmission timing difference between E-UTRA PCell and PSCell as shown in Table 7.5.2-1.

Table 7.5.2-1 Maximum uplink transmission timing difference requirement for asynchronous EN-DC

Sub-carrier spacing in E-UTRA PCell (kHz)	UL Sub-carrier spacing for data in PSCell (kHz)	Maximum uplink transmission timing difference (μs)
15	15	500
15	30	250
15	60	125
15	120[Note1]	62.5
NOTE 1: For E-UTRA FDD-NR FDD intra-band EN-DC, for which the requirement is defined in clause 7.5.3 and this Table 7.5.2-1 is also applicable, the scenario with 120kHz PSCell does not exist.		

Table 7.5.2-2 Void

7.5.2.1 Minimum Requirements for inter-band synchronous EN-DC

The requirements in this clause apply as a reference for inter-band synchronous EN-DC.

The UE shall be capable of handling a maximum uplink transmission timing difference between E-UTRA PCell and PSCell for inter-band synchronous EN-DC as shown in Table 7.5.2.1-1 1. The requirements for synchronous EN-DC are applicable for E-UTRA TDD-NR TDD, E-UTRA FDD-NR FDD, E-UTRA TDD-NR FDD and E-UTRA FDD-NR TDD inter-band EN-DC.

Table 7.5.2.1-1 Maximum uplink transmission timing difference requirement for inter-band synchronous EN-DC

Sub-carrier spacing in E-UTRA PCell (kHz)	UL Sub-carrier spacing for data in PSCell (kHz)	Maximum uplink transmission timing difference (μs)
15	15	35.21

15	30	35.21
15	60	35.21
15	120	35.21

7.5.3 Minimum Requirements for intra-band EN-DC

For intra-band EN-DC, only co-located deployment is applied.

The UE shall be capable of handling a maximum uplink transmission timing difference between E-UTRA PCell and PSCell as shown in Table 7.5.2-1 for E-UTRA FDD-NR FDD intra-band EN-DC provided the UE indicates that it is capable of asynchronous EN-DC operation [2].

The UE shall be capable of handling a maximum uplink transmission timing difference between E-UTRA PCell and PSCell as shown in Table 7.5.3-1 for E-UTRA TDD-NR TDD and E-UTRA FDD-NR FDD intra-band EN-DC provided the UE does not indicate that it is capable of asynchronous FDD-FDD EN-DC operation [16].

Table 7.5.3-1: Maximum uplink transmission timing difference requirement for intra-band synchronous EN-DC

Sub-carrier spacing in E-UTRA PCell (kHz)	UL Sub-carrier spacing for data in PSCell (kHz)	Maximum uplink transmission timing difference (μs)
15	15	5.21 Note1,Note 2
15	30	5.21 Note 2
15	60	5.21 Note 2
NOTE 1: This is not applicable for a UE which indicates the capability of only supporting single UL timing (*ul-TimingAlignmentEUTRA-NR* is signalled). Single UL timing for E-UTRA and NR cell is assumed for this UE. NOTE 2: If the transmission timing difference exceeds the cyclic prefix length of the UL Sub-carrier spacing for data in PSCell, NR UE Tx EVM degradation is expected for the symbol that is overlapping the LTE subframe boundary		

7.5.4 Minimum Requirements for NR Carrier Aggregation

The UE shall be capable of handling at least a relative transmission timing difference between slot timing of all pairs of TAGs in FR1 and/or FR2-1 as shown in Table 7.5.4-1, provided that the UE is:

- configured with the pTAG and the sTAG for inter-band NR carrier aggregation in SA or NR-DC mode, or
- configured with more than one sTAG for inter-band NR carrier aggregation in EN-DC or NE-DC mode.

The UE shall be capable of handling at least a relative transmission timing difference between subframe timing of all pairs of TAGs between FR1 and FR2-2 as shown in Table 7.5.4-1, provided that the UE is:

- configured with the pTAG and the sTAG for inter-band NR carrier aggregation in SA or NR-DC mode.

Table 7.5.4-1: Maximum uplink transmission timing difference requirement for inter-band NR carrier aggregation

Frequency Range of the pair of TAGs	Maximum uplink transmission timing difference (μs)
FR1	34.6
FR2-1	8.5 Note1
Between FR1 and FR2-1	26.1
Between FR1 and FR2-2	26.1
Note1: This requirement applies to the UE capable of independent beam management for FR2-1 inter-band CA.	

7.5.5 Minimum Requirements for inter-band NE-DC

The UE shall be capable of handling a maximum uplink transmission timing difference between PCell and E-UTRA PSCell as shown in Table 7.5.5-1 for inter-band asynchronous NE-DC.

Table 7.5.5-1: Maximum uplink transmission timing difference requirement for inter-band asynchronous NE-DC

Sub-carrier spacing in PCell (kHz)	UL Sub-carrier spacing for data in E-UTRA PSCell (kHz)	Maximum uplink transmission timing difference (μs)
15	15	500
30	15	250
60	15	125
120	15	62.5
NOTE 1: Void		

Table 7.5.5-2 Void

7.5.5.1 Minimum Requirements for inter-band synchronous NE-DC

The requirements in this clause apply as a reference for inter-band synchronous NE-DC.

The UE shall be capable of handling a maximum uplink transmission timing difference between PCell and E-UTRA PSCell for inter-band synchronous NE-DC as shown in Table 7.5.5.1-1. The requirements for synchronous NE-DC are applicable for NR TDD- E-UTRA TDD, NR FDD- E-UTRA FDD, NR TDD- E-UTRA FDD and NR FDD- E-UTRA TDD inter-band NE-DC.

Table 7.5.5.1-1: Maximum uplink transmission timing difference requirement for inter-band synchronous NE-DC

Sub-carrier spacing in PCell (kHz)	UL Sub-carrier spacing for data in E-UTRA PSCell (kHz)	Maximum uplink transmission timing difference (μs)
15	15	35.21
30	15	35.21
60	15	35.21
120	15	35.21

7.5.6 Minimum Requirements for inter-band NR DC

The UE shall be capable of handling a maximum uplink transmission timing difference between PCell and PSCell as shown in Table 7.5.6-1 provided that the UE indicates that it is capable of synchronous NR DC only [14].

Table 7.5.6-1: Maximum uplink transmission timing difference requirement for inter-band synchronous NR DC

Frequency Range		Maximum uplink transmission timing difference (μs)
Cell in MCG	Cell in SCG	
FR1	FR1	34.6
FR2-1	FR2-1	8.5
FR1	FR2-1	34.1
FR1	FR2-2	34.1

The UE shall be capable of handling a maximum uplink transmission timing difference between PCell and PSCell as shown in Table 7.5.6-2 provided that the UE indicates that it is capable of asynchronous NR DC [14].

Table 7.5.6-2 Maximum uplink transmission timing difference requirement for inter-band asynchronous NR DC

Max {Sub-carrier spacing in PCell (kHz), Sub-carrier spacing in PSCell (kHz)}	Maximum uplink transmission timing difference (μs)
15	500
30	250
60	125
120	62.5
480	15.625
960	7.8125

7.6 Maximum Receive Timing Difference

7.6.1 Introduction

A UE shall be capable of handling a relative receive timing difference between subframe timing boundary of an E-UTRA cell belonging to the MCG and the closest slot timing boundary of a cell belonging to SCG to be aggregated for EN-DC operation.

A UE shall be capable of handling a relative receive timing difference between subframe timing boundary of an E-UTRA cell belonging to the SCG to be aggregated for NE-DC operation and the closest slot timing boundary of a cell belonging to MCG.

A UE shall be capable of handling a relative receive timing difference between slot timing boundary of a cell belonging to MCG in FR1 or FR2-1 and the closest slot timing boundary of a cell belonging to the SCG FR1 or FR2-1 to be aggregated for NR DC operation.

A UE shall be capable of handling a relative receive timing difference between subframe timing boundary of a cell belonging to MCG in FR1 and the closest subframe timing boundary of a cell belonging to the SCG in FR2-2 to be aggregated for NR DC operation.

A UE shall be capable of handling a relative receive timing difference among the closest slot timing boundaries of different carriers in FR1 and/or FR2-1 to be aggregated in NR carrier aggregation.

A UE shall be capable of handling a relative receive timing difference among the closest subframe timing boundaries of different carriers to be aggregated in FR1 and FR2-2 NR inter-band carrier aggregation.

The requirements defined in clause 7.6 are also applicable when UE is configured to receive multiple PDSCH transmission occasions from one or more QCL sources on any one of the aggregated NR carriers.

7.6.2 Minimum Requirements for inter-band EN-DC

The UE shall be capable of handling at least a relative receive timing difference between subframe timing of signal from a E-UTRA cell belonging to the MCG and slot timing of signal from a cell belonging to SCG at the UE receiver as shown in Table 7.6.2-1.

Table 7.6.2-1: Maximum receive timing difference requirement for asynchronous EN-DC

Sub-carrier spacing of E-UTRA cell in MCG (kHz)	DL Sub-carrier spacing of cell in SCG (kHz) (Note 1)	Maximum receive timing difference (μs)
15	15	500
15	30	250
15	60	125
15	120[Note2]	62.5
NOTE 1: DL Sub-carrier spacing is min{SCS_{SS}, SCS_{DATA}}.		

NOTE 2: For E-UTRA FDD-NR FDD intra-band EN-DC, for which the requirement is defined in clause 7.6.3 and this Table 7.6.2-1 is also applicable, the scenario with 120 kHz does not exit.

Table 7.6.2-2 Void

Table 7.6.2-3 Void

7.6.2.1 Minimum Requirements for inter-band synchronous EN-DC

The requirements in this clause apply as a reference for inter-band synchronous EN-DC.

The UE shall be capable of handling at least a relative receive timing difference between subframe timing of signal from an E-UTRA cell belonging to the MCG and slot timing of signal from a cell belonging to SCG at the UE receiver for inter-band synchronous EN-DC as shown in Table 7.6.2.1-1. The requirements for synchronous EN-DC are applicable for E-UTRA TDD-NR TDD, E-UTRA FDD-NR FDD, E-UTRA TDD-NR FDD and E-UTRA FDD-NR TDD inter-band EN-DC.

Table 7.6.2.1-1: Maximum receive timing difference requirement for inter-band synchronous EN-DC

Sub-carrier spacing of E-UTRA cell in MCG (kHz)	DL Sub-carrier spacing of cell in SCG (kHz) (Note1)	Maximum receive timing difference (μs)
15	15	33
15	30	
15	60	
15	120	
Note 1: DL Sub-carrier spacing is min{SCS_{SS}, SCS_{DATA}}.		

7.6.3 Minimum Requirements for intra-band EN-DC

For intra-band EN-DC, only co-located deployment is applied.

The UE shall be capable of handling at least a relative receive timing difference between subframe timing of signal from a E-UTRA cell belonging to the MCG and slot timing of signal from a cell belonging to the SCG as shown in Table 7.6.2-1 for E-UTRA FDD-NR FDD intra-band EN-DC provided the UE indicates that it is capable of asynchronous EN-DC operation [2].

The UE shall be capable of handling at least a relative receive timing difference between subframe timing of signal from a E-UTRA cell belonging to the MCG and slot timing of signal from a cell belonging to the SCG as shown in Table 7.6.3-1 for E-UTRA FDD-NR FDD and E-UTRA TDD-NR TDD intra-band EN-DC provided the UE does not indicate that it is capable of asynchronous FDD-FDD EN-DC operation [16].

Table 7.6.3-1 Maximum receive timing difference requirement for intra-band synchronous EN-DC

Sub-carrier spacing of E-UTRA cell in MCG (kHz)	DL Sub-carrier spacing of cell in SCG (kHz) Note1	Maximum receive timing difference (μs)
15	15	3
15	30	3
15	60	3
NOTE 1: DL Sub-carrier spacing is min{SCS_{SS}, SCS_{DATA}}.		

Table 7.6.3-2: Void

7.6.4 Minimum Requirements for NR Carrier Aggregation

For intra-band CA, only co-located deployment is applied. For intra-band non-contiguous NR carrier aggregation, the UE shall be capable of handling at least a relative receive timing difference between slot timing of different carriers to be aggregated at the UE receiver as shown in Table 7.6.4-1 below.

Table 7.6.4-1: Maximum receive timing difference requirement for intra-band non-contiguous NR carrier aggregation

Frequency Range	Maximum receive timing difference (μs)
FR1	3[1]
FR2-1	0.26
Note 1: In the case of different SCS on different CCs, if the receive time difference exceeds the cyclic prefix length of that SCS, demodulation performance degradation is expected for the first symbol of the slot.	

For inter-band NR carrier aggregation,

- the UE shall be capable of handling at least a relative receive timing difference between slot timing of all pairs of carriers in FR1 and FR2-1 to be aggregated at the UE receiver as shown in Table 7.6.4-2 below.
- the UE shall be capable of handling at least a relative receive timing difference between subframe timing of all pairs of carriers in FR1 and FR2-2 to be aggregated at the UE receiver as shown in Table 7.6.4-2 below.

Table 7.6.4-2: Maximum receive timing difference requirement for inter-band NR carrier aggregation

Frequency Range of the pair of carriers	Maximum receive timing difference (μs)
FR1	33
FR2-1	8 note1
Between FR1 and FR2-1	25
Between FR1 and FR2-2	25
Note1: This requirement applies to the UE capable of independent beam management for FR2-1 inter-band CA.	

7.6.5 Minimum Requirements for inter-band NE-DC

The UE shall be capable of handling at least a relative receive timing difference between slot timing of signal from a cell belonging to the MCG and subframe timing of signal from an E-UTRA cell belonging to the SCG at the UE receiver for asynchronous NE-DC as shown in Table 7.6.5-1.

Table 7.6.5-1: Maximum receive timing difference requirement for asynchronous NE-DC

Sub-carrier spacing of cell in MCG (kHz)	DL Sub-carrier spacing of EUTRA cell in SCG (kHz) (Note 1)	Maximum receive timing difference (μs)
15	15	500
30	15	250
60	15	125
120	15	62.5
NOTE 1: DL Sub-carrier spacing is min{SCS_{SS}, SCS_{DATA}}. NOTE 2: Void		

The UE shall be capable of handling at least a relative receive timing difference between slot timing of signal from a cell belonging to the MCG and subframe timing of signal from a E-UTRA cell belonging to the SCG at the UE receiver

for inter-band synchronous NE-DC as shown in Table 7.6.5-2. The requirements for synchronous NE-DC are applicable for NR TDD- E-UTRA TDD, NR FDD- E-UTRA FDD, NR TDD- E-UTRA FDD and NR FDD- E-UTRA TDD inter-band NE-DC.

Table 7.6.5-2: Void

7.6.5.1 Minimum Requirements for inter-band synchronous NE-DC

The requirements in this clause apply as a reference for inter-band synchronous NE-DC.

The UE shall be capable of handling at least a relative receive timing difference between slot timing of signal from a cell belonging to the MCG and subframe timing of signal from a E-UTRA cell belonging to the SCG at the UE receiver for inter-band synchronous NE-DC as shown in Table 7.6.5.1-1. The requirements for synchronous NE-DC are applicable for NR TDD- E-UTRA TDD, NR FDD- E-UTRA FDD, NR TDD- E-UTRA FDD and NR FDD- E-UTRA TDD inter-band NE-DC.

Table 7.6.5.1-1: Maximum receive timing difference requirement for inter-band synchronous NE-DC

Sub-carrier spacing of cell in MCG (kHz)	DL Sub-carrier spacing of EUTRA cell in SCG (kHz) (Note1)	Maximum receive timing difference (μs)
15	15	33
30	15	
60	15	
120	15	

7.6.6 Minimum Requirements for inter-band NR DC

The UE shall be capable of handling at least a relative receive timing difference between slot timing of signal from a cell belonging to the MCG in FR1 or FR2-1 and slot timing of signal from a cell belonging to the SCG in FR1 or FR2-1 at the UE receiver as shown in Table 7.6.6-1 provided that the UE indicates that it is capable of synchronous NR DC only [16].

The UE shall be capable of handling at least a relative receive timing difference between subframe timing of signal from a cell belonging to the MCG in FR1 and subframe timing of signal from a cell belonging to the SCG in FR2-2 at the UE receiver as shown in Table 7.6.6-1 provided that the UE indicates that it is capable of synchronous NR DC only [16].

Table 7.6.6-1: Maximum receive timing difference requirement for inter-band synchronous NR DC

Frequency Range		Maximum receive timing difference (μs)
Cell in MCG	Cell in SCG	
FR1	FR1	33
FR2-1	FR2-1	8
FR1	FR2-1	33
FR1	FR2-2	33

The UE shall be capable of handling at least a relative receive timing difference between slot timing of signal from a cell belonging to the MCG in FR1 or FR2-1 and slot timing of signal from a cell belonging to the SCG in FR1 or FR2-1 at the UE receiver as shown in Table 7.6.6-2 provided that the UE indicates that it is capable of asynchronous NR DC [16].

The UE shall be capable of handling at least a relative receive timing difference between subframe timing of signal from a cell belonging to the MCG in FR1 and subframe timing of signal from a cell belonging to the SCG in FR2-2 at the UE receiver as shown in Table 7.6.6-2 provided that the UE indicates that it is capable of asynchronous NR DC [16].

Table 7.6.6-2 Maximum receive timing difference requirement for inter-band asynchronous NR DC

Max {Sub-carrier spacing in PCell (kHz), Sub-carrier spacing in PSCell (kHz)}	Maximum receive timing difference (μs)
15	500
30	250
60	125
120	62.5
480	15.625
960	7.8125

7.7 *deriveSSB-IndexFromCell* tolerance

7.7.1 Minimum requirements

When *deriveSSB-IndexFromCell* is enabled, the UE assumes frame boundary alignment (including half frame, subframe and slot boundary alignment) across cells on the same frequency carrier is within a tolerance not worse than

- min (2 SSB symbols, 1 PDSCH symbol) for sub-carrier spacings of SSB and PDSCH up-to 240 kHz,
- min (3 SSB symbols, N_{PDSCH} PDSCH symbols) for sub-carrier spacing of 480 kHz and 960kHz of either SSB or PDSCH where N_{PDSCH} is defined in Table 7.7.1-1

and the SFNs of all cells on the same frequency carrier are the same.

Table 7.7.1-1 N_{PDSCH} when deriveSSB-IndexFromCell is enabled

SSB SCS (KHz)	PDSCH SCS (KHz)	N_{PDSCH}
120	480	3
120	960	6
480	120	1
480	480	3
480	960	6
960	120	1
960	480	2
960	960	3

When *deriveSSB-IndexFromCell* is not enabled, the UE assumes frame boundary alignment (including half frame, subframe and slot boundary alignment) across cells on the same frequency carrier is within a tolerance not worse than 6 SSB symbols for sub-carrier spacing of 960kHz and the SFNs of all cells on the same frequency carrier are the same.

7.7A deriveSSB-IndexFromCell tolerance for RedCap

7.7A.1 Minimum requirements

When *deriveSSB-IndexFromCell* is enabled, the RedCap UE assumes frame boundary alignment (including half frame, subframe and slot boundary alignment) across cells on the same frequency carrier is within a tolerance not worse than min(2 SSB symbols, 1 PDSCH symbol) and the SFNs of all cells on the same frequency carrier are the same.

7.8 Void

7.9 *deriveSSB-IndexFromCellInter-r17* tolerance

7.9.1 Minimum requirements

When *deriveSSB-IndexFromCellInter-r17* is enabled, the UE assumes frame boundary alignment (including half frame, subframe and slot boundary alignment) across cells on the target carrier and reference carrier is within a tolerance not worse than min(2 SSB symbols of target carrier, 1 PDSCH symbol of the reference cell) and the SFNs of all cells on the target carrier and reference carrier are the same. The reference cell is the serving cell which is used for SSB indexes derivation.

8 Signalling characteristics

8.1 Radio Link Monitoring

8.1.1 Introduction

The requirements in clause 8.1 apply for radio link monitoring on:

- PCell in SA NR, NR-DC and NE-DC operation mode,
- PSCell in NR-DC and EN-DC operation mode,
- Deactivated PSCell in NR-DC and EN-DC operation mode, when configured.

The UE shall monitor the downlink radio link quality based on the reference signal configured as RLM-RS resource(s) in order to detect the downlink radio link quality of the PCell, PSCell and deactivated PSCell if configured with *bfd-and-RLM* with value *true* as specified in TS 38.213 [3]. The configured RLM-RS resources can be all SSBs, or all CSI-RSs, or a mix of SSBs and CSI-RSs. UE is not required to perform RLM outside the active DL BWP.

On each RLM-RS resource, the UE shall estimate the downlink radio link quality and compare it to the thresholds Q_{out} and Q_{in} for the purpose of monitoring downlink radio link quality of the cell.

When a CORESET that the UE uses for monitoring PDCCH includes two TCI states and the UE is provided *sfnSchemePdcch* set to 'sfnSchemeA' or 'sfnSchemeB', the UE shall estimate a single downlink radio link quality to derive single SNR and compare it to the single thresholds Q_{out} and Q_{in} for the purpose of monitoring downlink radio link quality of the cell(s). How to compute the single SNR based on two active TCI states is up to UE implementation.

The threshold Q_{out} is defined as the level at which the downlink radio link cannot be reliably received and shall correspond to the out-of-sync block error rate ($BLER_{out}$) as defined in Table 8.1.1-1. For SSB based radio link monitoring, Q_{out_SSB} is derived based on the hypothetical PDCCH transmission parameters listed in Table 8.1.2.1-1. For CSI-RS based radio link monitoring, $Q_{out_CSI\text{-}RS}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 8.1.3.1-1.

The threshold Q_{in} is defined as the level at which the downlink radio link quality can be received with significantly higher reliability than at Q_{out} and shall correspond to the in-sync block error rate ($BLER_{in}$) as defined in Table 8.1.1-1. For SSB based radio link monitoring, Q_{in_SSB} is derived based on the hypothetical PDCCH transmission parameters listed in Table 8.1.2.1-2. For CSI-RS based radio link monitoring, $Q_{in_CSI\text{-}RS}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 8.1.3.1-2.

The out-of-sync block error rate ($BLER_{out}$) and in-sync block error rate ($BLER_{in}$) are determined from the network configuration via parameter *rlmInSyncOutOfSyncThreshold* signalled by higher layers. When UE is not configured with *rlmInSyncOutOfSyncThreshold* from the network, UE determines out-of-sync and in-sync block error rates from Configuration #0 in Table 8.1.1-1 by default. All requirements in clause 8.1 are applicable for BLER Configuration #0 in Table 8.1.1-1.

Table 8.1.1-1: Out-of-sync and in-sync block error rates

Configuration	$BLER_{out}$	$BLER_{in}$
0	10%	2%

UE shall be able to monitor up to N_{RLM} RLM-RS resources of the same or different types in each corresponding carrier frequency range, depending on a maximum number L_{max} of SSBs per half frame according to TS 38.213 [3], where N_{RLM} is specified in Table 8.1.1-2 according TS 38.213 [3], and meet the requirements as specified in clause 8.1. UE is not required to meet the requirements in clause 8.1 if RLM-RS is not configured and no TCI state for PDCCH is activated.

Table 8.1.1-2: Maximum number of RLM-RS resources N_{RLM}

Carrier frequency range of PCell/PSCell	L_{max}	Maximum number of RLM-RS resources, N_{RLM}
FR1, ≤ 3 GHz[Note]	4	2
FR1, > 3 GHz[Note]	8	4
FR2	64	8
NOTE: For unpaired spectrum operation with Case C - 30 kHz SCS, 3GHz is replaced by 1.88GHz, as specified in clause 4.1 in TS 38.213 [3].		

8.1.1.1 Introduction of Requirement on Radio Link Monitoring for UE Configured with Relaxed Measurement Criteria

For the UE supports *rlm-Relaxation-r17*and configured with explicit signaling *goodServingCellEvaluationRLM*, which is always configured to the UE when the network enables RLM relaxation for the UE as specified in TS 38.331 [2], the relaxed requirements defined in clause 8.1.2.4 for SSB based radio link monitoring and the relaxed requirements defined in clause 8.1.3.4 for CSI-RS based radio link monitoring are allowed to apply to the relaxed RLM measurements on SpCell after fulfilling the following conditions:

- for the serving cells in intra-band carrier aggregation configured with SSB-based or CSI-RS based RLM on SpCell together with CSI-RS based BFD on SCell, when
  - the good serving cell quality criterion defined in clause 5.7.13.2 of TS 38.331 [2] is fulfilled for the serving cell based on the measurements that are configured for SSB-based or CSI-RS based RLM on SpCell together with CSI-RS based BFD on Scell in the intra-band carrier aggregation if the *lowMobilityEvaluationConnected* is not configured, or
  - the UE is also configured with *lowMobilityEvaluationConnected* and both low mobility criterion defined in clause 5.7.13.1 of TS 38.331 [2] is fulfilled for a period of $T_{SearchDeltaP\text{-}Connected}$ and good serving cell quality criterion defined in clause 5.7.13.2 of TS 38.331 [2] is fulfilled for the serving cell based on the measurements that are configured for SSB-based or CSI-RS based RLM on SpCell together with CSI-RS based BFD on Scell in the intra-band carrier aggregation.
- for other serving cells, when
  - the good serving cell quality criterion defined in clause 5.7.13.2 of TS 38.331 [2] is fulfilled for the SpCell if the *lowMobilityEvaluationConnected* is not configured, or
  - the UE is also configured with *lowMobilityEvaluationConnected* and both low mobility criterion defined in clause 5.7.13.1 of TS 38.331 [2] is fulfilled for a period of $T_{SearchDeltaP\text{-}Connected}$ and good serving cell quality criterion defined in clause 5.7.13.2 of TS 38.331 [2] is fulfilled for the SpCell.

otherwise, UE shall apply the requirements defined in clause 8.1.2.2 for SSB based radio link monitoring and the requirements defined in clause 8.1.3.2 for CSI-RS based radio link monitoring. Note that when multiple resources are configured on a serving cell for RLM or BFD evaluation, the good serving cell quality critierion is considered as fulfilled for the serving cell when any resource configured for the cell fulfills the good serving defined in clause 5.7.13.2 of TS 38.331 [2].

The UE is no longer allowed to relax RLM measurements and apply the relaxed radio link monitoring provided that at least one of the following conditions is met:

- The UE sends out-of sync indications to the higher layers,
- The timer T310 is running.
- No DRX is used or DRX cycle is longer than 80ms

8.1.2 Requirements for SSB based radio link monitoring

8.1.2.1 Introduction

The requirements in this clause apply for each SSB based RLM-RS resource configured for PCell, PSCell or deactivated PSCell, provided that the SSB configured for RLM is actually transmitted within UE active DL BWP during the entire evaluation period specified in clause 8.1.2.2.

Table 8.1.2.1-1: PDCCH transmission parameters for out-of-sync evaluation

Attribute	Value for BLER Configuration #0
DCI format	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	8
Ratio of hypothetical PDCCH RE energy to average SSS RE energy	4dB
Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	4dB
Bandwidth (PRBs)	24
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed

Table 8.1.2.1-2: PDCCH transmission parameters for in-sync evaluation

Attribute	Value for BLER Configuration #0
DCI payload size	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	4
Ratio of hypothetical PDCCH RE energy to average SSS RE energy	0dB
Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	0dB
Bandwidth (PRBs)	24
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed

8.1.2.2 Minimum requirement

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{Evaluate_out_SSB}$ [ms] period becomes worse than the threshold Q_{out_SSB} within $T_{Evaluate_out_SSB}$ [ms] evaluation period.

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{Evaluate_in_SSB}$ [ms] period becomes better than the threshold Q_{in_SSB} within $T_{Evaluate_in_SSB}$ [ms] evaluation period.

$T_{Evaluate_out_SSB}$ and $T_{Evaluate_in_SSB}$ are defined in Table 8.1.2.2-1 for FR1.

$T_{Evaluate_out_SSB}$ and $T_{Evaluate_in_SSB}$ are defined in Table 8.1.2.2-2 for FR2 with scaling factor N=8 for FR2-1 and N=12 for FR2-2, for FR2 power classes other than power class 6 or for FR2 class 6 when *highSpeedMeasFlagFR2-r17* is not configured

$T_{Evaluate_out_SSB}$ and $T_{Evaluate_in_SSB}$ are defined in Table 8.1.2.2-3 for FR2 power class 6 UE configured with *highSpeedMeasFlagFR2-r17*.

$T_{Evaluate_out_SSB}$ and $T_{Evaluate_in_SSB}$ are defined in Table 8.1.2.2-4 for FR1 (deactivated PSCell).

$T_{Evaluate_out_SSB}$ and $T_{Evaluate_in_SSB}$ are defined in Table 8.1.2.2-4 for FR1 (deactivated PSCell).

$T_{Evaluate_out_SSB}$ and $T_{Evaluate_in_SSB}$ are defined in Table 8.1.2.2-5 for FR2 (deactivated PSCell) with scaling factor N=8 for FR2-1 and N=12 for FR2-2.

When concurrent gaps are configured,

- P value for an RLM-RS resource to be measured is defined as
  - N_{total} / $N_{outside_MG}$ in FR1
  - $P_{sharing\ factor}$ * N_{total} / $N_{outside_MG}$ in FR2 with $N_{available}$ = 0
  - N_{total} / $N_{available}$ in FR2 with Navailable > 0
- For a window W of duration max($T_{L1,}$ MGRP_max), where MGRP max is the maximum MGRP across all configured per-UE measurement gaps and per-FR measurement gaps within the same FR as serving cell, and starting at the beginning of any RLM-RS resource occasion:
  - N_{total} is the total number of RLM-RS resource occasions within the window, including those overlapped with measurement gap occasions or SMTC occasions within the window, and
  - $N_{outside_MG}$ is the number of RLM-RS resource occasions that are not overlapped with any measurement gap occasion within the window W
  - $N_{available}$ is the number of RLM-RS resource occasions that are not overlapped with any measurement gap occasion nor any SMTC occasion within the window W
  - T_{L1} is periodicity of the target RLM-RS.

Otherwise, for a UE not supporting *concurrentMeasGap-r17* or when concurrent gaps are not configured,

For FR1,

- $P = \frac{1}{1-\frac{T_{SSB}}{xRP}}$, when in the monitored cell there are GAPs configured for intra-frequency, inter-frequency or inter-RAT measurements, and these GAPs are overlapping with some but not all occasions of the SSB; and
- P = 1 when in the monitored cell there are no GAPs overlapping with any occasion of the SSB.

For FR2

- $P = \frac{1}{1-\frac{T_{SSB}}{T_{SMTCperiod}}}$, when RLM-RS resource is not overlapped with GAP and the RLM-RS resource is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$).
- P is $P_{sharing\ factor}$, when the RLM-RS resource is not overlapped with GAP and RLM-RS resource is fully overlapped with SMTC period ($T_{SSB} = T_{SMTCperiod}$).
- $P = \frac{1}{1-\frac{T_{SSB}}{xRP}-\frac{T_{SSB}}{T_{SMTCperiod}}}$, when the RLM-RS resource is partially overlapped with GAP and the RLM-RS resource is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with [measurement gap] and
  - $T_{SMTCperiod} \neq$ xRP or
  - $T_{SMTCperiod}$ = xRP and $T_{SSB} < 0.5 * T_{SMTCperiod}$
- $P = \frac{P_{sharing\ factor}}{1-\frac{T_{SSB}}{xRP}}$, when the RLM-RS is partially overlapped with GAP and the RLM-RS is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with [measurement gap] and $T_{SMTCperiod}$ = xRP and $T_{SSB} = 0.5 \times T_{SMTCperiod}$

- $P = \frac{1}{1-\frac{T_{SSB}}{T_{SMTCperiod}}}$, when the RLM-RS resource is partially overlapped with GAP and the RLM-RS resource is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with [measurement gap]

- $P = \frac{P_{sharing\ factor}}{1-\frac{T_{SSB}}{xGP}}$, when the RLM-RS resource is partially overlapped with GAP and the RLM-RS resource is fully overlapped with SMTC occasion ($T_{SSB} = T_{SMTCperiod}$) and SMTC occasion is partially overlapped with GAP ($T_{SMTCperiod} < xRP$)

where,

- $P_{sharing\ factor} = 1$, if the RLM-RS resource outside gap is

  - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and,

  - not overlapped by the RSSI symbols indicated by *ss-RSSI-Measurement* and 1 data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured.

- $P_{sharing\ factor} = 3$, otherwise.

- If the high layer in TS 38.331 [2] signaling of *smtc2* is present, $T_{SMTCperiod}$ follows *smtc2*; Otherwise $T_{SMTCperiod}$ follows *smtc1*. $T_{SMTCperiod}$ is the shortest SMTC period among all CCs in the same FR2 band, provided the SMTC offset of all CCs in FR2 have the same offset.

- When a measurement gap is configured and the measurement gap is not NCSG,

  - an RLM-RS resource or an SMTC occasion is considered to be overlapped with the GAP if it overlaps a measurement gap occasion, and

  - xRP = MGRP

- Otherwise,when NCSG measurement gap is configured,

  - an RLM-RS resource or an SMTC occasion is considered to be overlapped with the GAP if

    - it overlaps the VIL1 or VIL2 of NCSG, or

    - it overlaps the ML of NCSG in FR2, and there exists a target carrier to be measured within NCSG that is intra-frequency carrier or inter-frequency carrier in the same band as the serving cell, or inter-frequency carrier in different band as the serving cell and UE does not support IBM between the target carrier and the serving cell,

  - and

    - xRP = VIRP

- If the UE is configured with Pre-MG, an RLM-RS resource or an SMTC occasion is only considered to be overlapped by the Pre-MG if the Pre-MG is activated.

- When concurrent gaps are configured, an RLM-RS or an SMTC occasion is not considered as overlapped by a gap occasion if the gap occasion is dropped according to 9.1.8.

If the high layer in TS 38.331 [2] signaling of *smtc2* is present, $T_{SMTCperiod}$ follows *smtc2*; Otherwise $T_{SMTCperiod}$ follows *smtc1*.

Longer evaluation period would be expected if the combination of RLM-RS resource, SMTC occasion and GAP configurations does not meet previous conditions

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI,E\text{-}UTRAN}$ when the UE is requested to decode an LTE CGI.

Table 8.1.2.2-1: Evaluation period $T_{Evaluate_out_SSB}$ and $T_{Evaluate_in_SSB}$ for FR1

Configuration	$T_{Evaluate_out_SSB}$ (ms)	$T_{Evaluate_in_SSB}$ (ms)
no DRX	Max(200, Ceil(10 × P) × T_{SSB})	Max(100, Ceil(5 × P) × T_{SSB})
DRX cycle≤320ms	Max(200, Ceil(15 × P) × Max(T_{DRX},T_{SSB}))	Max(100, Ceil(7.5 × P) × Max(T_{DRX},T_{SSB}))
DRX cycle>320ms	Ceil(10 × P) × T_{DRX}	Ceil(5 × P) × T_{DRX}
NOTE: T_{SSB} is the periodicity of the SSB configured for RLM. T_{DRX} is the DRX cycle length.		

Table 8.1.2.2-2: Evaluation period $T_{Evaluate_out_SSB}$ and $T_{Evaluate_in_SSB}$ for FR2

Configuration	$T_{Evaluate_out_SSB}$ (ms)	$T_{Evaluate_in_SSB}$ (ms)
no DRX	Max(200, Ceil(10 × P × N) × T_{SSB})	Max(100, Ceil(5 × P × N) × T_{SSB})
DRX cycle≤320ms	Max(200, Ceil(15 × P × N) × Max(T_{DRX},T_{SSB}))	Max(100, Ceil(7.5 × P × N) × Max(T_{DRX},T_{SSB}))
DRX cycle>320ms	Ceil(10 × P × N) × T_{DRX}	Ceil(5 × P × N) × T_{DRX}
NOTE: T_{SSB} is the periodicity of the SSB configured for RLM. T_{DRX} is the DRX cycle length.		

Table 8.1.2.2-3: Evaluation period $T_{Evaluate_out_SSB}$ and $T_{Evaluate_in_SSB}$ for FR2 power class 6 UE configured with *highSpeedMeasFlagFR2-r17*

Configuration	$T_{Evaluate_out_SSB}$ (ms)	$T_{Evaluate_in_SSB}$ (ms)
no DRX	Max(200, Ceil(10 × P × N [Note2]) × T_{SSB})	Max(100, Ceil(5 × P × N [Note2]) × T_{SSB})
DRX cycle≤80ms	Max(200, Ceil(15 × P × N [Note2]) × Max(T_{DRX},T_{SSB}))	Max(100, Ceil(7.5 × P × N [Note2]) × Max(T_{DRX},T_{SSB}))
NOTE 1: T_{SSB} is the periodicity of the SSB configured for RLM. T_{DRX} is the DRX cycle length. NOTE 2: scaling factor N=2 when *highSpeedMeasFlagFR2-r17* is configured to set1 or scaling factor N=6 when *highSpeedMeasFlagFR2-r17* is configured to set2.		

Table 8.1.2.2-4: Evaluation period $T_{Evaluate_out_SSB}$ and $T_{Evaluate_in_SSB}$ for FR1(deactivated PSCell)

Configuration	$T_{Evaluate_out_SSB}$ (ms)	$T_{Evaluate_in_SSB}$ (ms)
no DRX	Ceil(10 × P) × measCyclePSCell	Ceil(5 × P) × measCyclePSCell
DRX cycle≤ 320ms	Ceil(15 × P) × Max(T_{DRX}, measCyclePSCell)	Ceil(7.5 × P) × Max(T_{DRX}, measCyclePSCell)
DRX cycle> 320ms	Ceil(10 × P) × Max(T_{DRX}, measCyclePSCell)	Ceil(5 × P) × Max(T_{DRX}, measCyclePSCell)
NOTE: T_{DRX} is the DRX cycle length of SCG. measCyclePSCell is the measurement cycle length of the deactivated PSCell.		

Table 8.1.2.2-5: Evaluation period $T_{Evaluate_out_SSB}$ and $T_{Evaluate_in_SSB}$ for FR2(deactivated PSCell)

Configuration	$T_{Evaluate_out_SSB}$ (ms)	$T_{Evaluate_in_SSB}$ (ms)
no DRX	Ceil(10 × P× N) × measCyclePSCell	Ceil(5 × P× N) × measCyclePSCell
DRX cycle≤ 320 ms	Ceil(15 × P× N) × Max(T_{DRX}, measCyclePSCell)	Ceil(7.5 × P× N) × Max(T_{DRX}, measCyclePSCell)
DRX cycle> 320 ms	Ceil(10 × P× N) × Max(T_{DRX}, measCyclePSCell)	Ceil(5 × P× N) × Max(T_{DRX}, measCyclePSCell)
NOTE: T_{DRX} is the DRX cycle length of SCG. measCyclePSCell is the measurement cycle length of the deactivated PSCell.		

8.1.2.3 Measurement restrictions for SSB based RLM

The UE is required to be capable of measuring SSB for RLM without measurement gaps. The UE is required to perform the SSB measurements with measurement restrictions as described in the following scenarios.

For FR1, when the SSB for RLM is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for RLM without any restriction;
- If SSB and CSI-RS have different SCS,
  - If UE supports *simultaneousRxDataSSB-DiffNumerology*, UE shall be able to measure the SSB for RLM without any restriction;
  - If UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both SSB for RLM and CSI-RS. Longer measurement period for SSB based RLM is expected, and no requirements are defined

For FR2, when the SSB for RLM measurement on one CC is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both SSB for RLM and CSI-RS. Longer measurement period for SSB based RLM is expected, and no requirements are defined.

For FR2, when the SSB for RLM measurement on one CC is in the same or adjacent OFDM symbol as SSB from cell with additional PCI for BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both SSBs. Longer measurement period for SSB based RLM is expected, and no requirements are defined.

For FR2, there is no measurement restriction allowed when the network configures mixed numerology between SSB for RLM measurement on one FR2 band and CSI-RS for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement on the other FR2 band, provided that UE is capable of independent beam management on this FR2 band pair.

8.1.2.4 Minimum requirement of SSB based radio link monitoring for UE fulfilling relaxed measurement criteria

This clause contains minimum requirements for relaxed radio link monitoring based on SSB.

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{Evaluate_out_SSB_Relax}$ [ms] period becomes worse than the threshold Q_{out_SSB} within $T_{Evaluate_out_SSB_Relax}$ [ms] evaluation period.

$T_{Evaluate_out_SSB_Relax}$ is defined in Table 8.1.2.4-1 for FR1.

$T_{Evaluate_out_SSB_Relax}$ is defined in Table 8.1.2.4-2 for FR2 with scaling factor N=8.

The value of P is defined in clause 8.1.2.2.

Longer evaluation period would be expected if the combination of RLM-RS resource, SMTC occasion and measurement gap configurations does not meet previous conditions.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI,E-UTRAN}$ when the UE is requested to decode an LTE CGI.

Table 8.1.2.4-1: Evaluation period $T_{Evaluate_out_SSB_Relax}$ for FR1

Configuration	$T_{Evaluate_out_SSB_Relax}$ (ms)

Max(T_{DRX},T_{SSB}) ≤80ms	Max(200× K3 [NOTE3], Ceil(15 × K1[NOTE2] × P) × Max(T_{DRX},T_{SSB}))
80ms < Max(T_{DRX},T_{SSB}) ≤160ms	Ceil(15 × P) × Max(T_{DRX},T_{SSB})
NOTE 1: T_{SSB} is the periodicity of the SSB configured for RLM. T_{DRX} is the DRX cycle length and no longer than 80ms. NOTE 2: K1 = 4 for Max(T_{DRX},T_{SSB}) ≤40ms and K1 = 2 for 40ms<Max(T_{DRX},T_{SSB}) ≤80ms. NOTE 3: K3 = K1, if K1 ≤ 2; otherwise K3 = 1.	

Table 8.1.2.4-2: Evaluation period $T_{Evaluate_out_SSB_Relax}$ for FR2

Configuration	$T_{Evaluate_out_SSB_Relax}$ (ms)
Max(T_{DRX},T_{SSB}) ≤80ms	Max(200× K4 [NOTE3], Ceil(15 × K2 [NOTE2] × P × N) × Max(T_{DRX},T_{SSB}))
80ms < Max(T_{DRX},T_{SSB}) ≤160ms	Ceil(15 × P × N) × Max(T_{DRX},T_{SSB})
NOTE 1: T_{SSB} is the periodicity of the SSB configured for RLM. T_{DRX} is the DRX cycle length and no longer than 80ms. NOTE 2: K2 = 2. NOTE 3: K4 = K2, if K2 ≤ 2; otherwise K4 = 1.	

8.1.3 Requirements for CSI-RS based radio link monitoring

8.1.3.1 Introduction

The requirements in this clause apply for each CSI-RS based RLM-RS resource configured for PCell, PSCell or deactivated PSCell, provided that the CSI-RS configured for RLM is actually transmitted within UE active DL BWP during the entire evaluation period specified in clause 8.1.3.2. UE is not expected to perform radio link monitoring measurements on the CSI-RS configured as RLM-RS if the CSI-RS is not in the active TCI state of any CORESET configured in the UE active BWP.

Table 8.1.3.1-1: PDCCH transmission parameters for out-of-sync evaluation

Attribute	Value for BLER Configuration #0
DCI format	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	8
Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	4dB
Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	4dB
Bandwidth (PRBs)	48
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed

Table 8.1.3.1-2: PDCCH transmission parameters for in-sync evaluation

Attribute	Value for BLER Configuration #0
DCI payload size	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	4

Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	0dB
Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	0dB
Bandwidth (PRBs)	48
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed

8.1.3.2 Minimum requirement

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{Evaluate_out_CSI-RS}$ ms period becomes worse than the threshold Q_{out_CSI-RS} within $T_{Evaluate_out_CSI-RS}$ ms evaluation period.

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{Evaluate_in_CSI-RS}$ ms period becomes better than the threshold Q_{in_CSI-RS} within $T_{Evaluate_in_CSI-RS}$ ms evaluation period.

- $T_{Evaluate_out_CSI-RS}$ and $T_{Evaluate_in_CSI-RS}$ are defined in Table 8.1.3.2-1 for FR1.
- $T_{Evaluate_out_CSI-RS}$ and $T_{Evaluate_in_CSI-RS}$ are defined in Table 8.1.3.2-2 for FR2 with scaling factor N=1.
- $T_{Evaluate_out_CSI-RS}$ and $T_{Evaluate_in_CSI-RS}$ are defined in Table 8.1.3.2-3 for FR1 (deactivated PSCell).
- $T_{Evaluate_out_CSI-RS}$ and $T_{Evaluate_in_CSI-RS}$ are defined in Table 8.1.3.2-4 for FR2 (deactivated PSCell) with scaling factor N=1.

The requirements of $T_{Evaluate_out_CSI-RS}$ and $T_{Evaluate_in_CSI-RS}$ apply provided that the CSI-RS for RLM is not in a resource set configured with repetition ON. The requirements do not apply when the CSI-RS resource in the active TCI state of CORESET is the same CSI-RS resource for RLM and the TCI state information of the CSI-RS resource is not given, wherein the TCI state information means QCL Type-D to SSB for L1-RSRP or CSI-RS with repetition ON.

When concurrent gaps are configured,

- P value for an RLM-RS resource to be measured is defined as
  - N_{total} / $N_{outside_MG}$ in FR1
  - $P_{sharing\ factor}$ * N_{total} / $N_{outside_MG}$ in FR2 with $N_{available}$ = 0
  - N_{total} / $N_{available}$ in FR2 with Navailable > 0
- For a window W of duration max($T_{L1,}$ MGRP_max), where MGRP max is the maximum MGRP across all configured per-UE measurement gaps and per-FR measurement gaps within the same FR as serving cell, and starting at the beginning of any RLM-RS resource occasion:
  - N_{total} is the total number of RLM-RS resource occasions within the window, including those overlapped with measurement gap occasions or SMTC occasions within the window, and
  - $N_{outside_MG}$ is the number of RLM-RS resource occasions that are not overlapped with any measurement gap occasion within the window W
  - $N_{available}$ is the number of RLM-RS resource occasions that are not overlapped with any measurement gap occasion nor any SMTC occasion within the window W

- T_{L1} is periodicity of the target RLM-RS.Otherwise, for a UE not supporting *concurrentMeasGap-r17* or when concurrent gaps are not configured,

For FR1,

- $P = \frac{1}{1-\frac{T_{CSI-RS}}{xRP}}$, when in the monitored cell there are GAPs configured for intra-frequency, inter-frequency or inter-RAT measurements, and these GAPs] are overlapping with some but not all occasions of the CSI-RS; and
- P=1 when in the monitored cell there are no GAPs overlapping with any occasion of the CSI-RS.

For FR2,

- P=1, when the RLM-RS resource is not overlapped with measurement gap and also not overlapped with SMTC occasion.
- $P = \frac{1}{1-\frac{T_{CSI-RS}}{xRP}}$, when the RLM-RS resource is partially overlapped with GAP and the RLM-RS resource is not overlapped with SMTC occasion ($T_{CSI-RS} < xRP$)
- $P = \frac{1}{1-\frac{T_{CSI-RS}}{T_{SMTCperiod}}}$, when the RLM-RS resource is not overlapped with GAP and the RLM-RS resource is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$).
- $P = P_{sharing\ factor}$, when the RLM-RS resource is not overlapped with GAP and RLM-RS resource is fully overlapped with SMTC occasion ($T_{CSI-RS} = T_{SMTCperiod}$).
- $P = \frac{1}{1-\frac{T_{CSI-RS}}{xRP}-\frac{T_{CSI-RS}}{T_{SMTCperiod}}}$, when the RLM-RS resource is partially overlapped with GAP and the RLM-RS resource is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with GAP and
  - $T_{SMTCperiod} \neq xRP$ or
  - $T_{SMTCperiod} = xRP$ and $T_{CSI-RS} < 0.5 \times T_{SMTCperiod}$
- $P = \frac{P_{\text{sharing factor}}}{1-\frac{T_{CSI-RS}}{xRP}}$, when the RLM-RS resource is partially overlapped with measurement gap and the RLM-RS resource is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with GAP and $T_{SMTCperiod} = xRP$ and $T_{CSI-RS} = 0.5 \times T_{SMTCperiod}$
- $P = \frac{1}{1-\frac{T_{CSI-RS}}{T_{SMTCperiod}}}$, when the RLM-RS resource is partially overlapped with GAP and the RLM-RS resource is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with GAP
- $P = \frac{P_{\text{sharing factor}}}{1-\frac{T_{CSI-RS}}{xRP}}$, when the RLM-RS resource is partially overlapped with measurement gap and the RLM-RS resource is fully overlapped with SMTC occasion ($T_{CSI-RS} = T_{SMTCperiod}$) and SMTC occasion is partially overlapped with measurement gap ($T_{SMTCperiod} < xRP$)

where,

- $P_{sharing\ factor} = 1$, if the RLM-RS resource outside gap is
  - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and,
  - not overlapped by the RSSI symbols indicated by *ss-RSSI-Measurement* and 1 data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured.
- $P_{sharing\ factor} = 3$, otherwise.
- If the high layer in TS 38.331 [2] signaling of *smtc2* is present, $T_{SMTCperiod}$ follows *smtc2*; Otherwise $T_{SMTCperiod}$ follows *smtc1*. $T_{SMTCperiod}$ is the shortest SMTC period among all CCs in the same FR2 band, provided the SMTC offset of all CCs in FR2 have the same offset.

- When a measurement gap is configured and the measurement gap is not NCSG,
  - an RLM-RS resource or an SMTC occasion is considered to be overlapped with the GAP if it overlaps a measurement gap occasion, and
  - xRP = MGRP
- Otherwise, when NCSG measurement gap is configured,
  - an RLM-RS resource or an SMTC occasion is considered to be overlapped with the GAP if
    - it overlaps the VIL1 or VIL2 of NCSG, or
    - it overlaps the ML of NCSG in FR2, and there exists a target carrier to be measured within NCSG that is intra-frequency carrier or inter-frequency carrier in the same band as the serving cell, or inter-frequency carrier in different band as the serving cell and UE does not support IBM between the target carrier and the serving cell,
  - and
    - xRP = VIRP

If the UE is configured with Pre-MG, an RLM-RS resource or an SMTC occasion is only considered to be overlapped by the Pre-MG if the Pre-MG is activated.

When concurrent gaps are configured, an RLM-RS or an SMTC occasion is not considered to be overlapped by a gap occasion if the gap occasion is dropped according to 9.1.8.

If the high layer in TS 38.331 [2] signaling of *smtc2* is present, $T_{SMTCperiod}$ follows *smtc2*; Otherwise $T_{SMTCperiod}$ follows *smtc1*.

Note: The overlap between CSI-RS for RLM and SMTC means that CSI-RS based RLM is within the SMTC window duration.

Longer evaluation period would be expected if the combination of RLM-RS resource, SMTC occasion and GAP configurations does not meet previous conditions.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI,E\text{-}UTRAN}$ when the UE is requested to decode an LTE CGI.

The values of M_{out} and M_{in} used in Table 8.1.3.2-1, Table 8.1.3.2-2, Table 8.1.3.2-3 and Table 8.1.3.2-4 are defined as:

- M_{out} = 20 and M_{in} = 10, if the CSI-RS resource configured for RLM is transmitted with higher layer CSI-RS parameter *density* [6, clause 7.4.1] set to 3 and over the bandwidth $\geqslant$ 24 PRBs.

Table 8.1.3.2-1: Evaluation period $T_{Evaluate_out_CSI\text{-}RS}$ and $T_{Evaluate_in_CSI\text{-}RS}$ for FR1

Configuration	$T_{Evaluate_out_CSI\text{-}RS}$ (ms)	$T_{Evaluate_in_CSI\text{-}RS}$ (ms)
no DRX	$Max(200, Ceil(M_{out}\times P)\times T_{CSI\text{-}RS})$	$Max(100, Ceil(M_{in}\times P) \times T_{CSI\text{-}RS})$
DRX ≤ 320ms	$Max(200, Ceil(1.5\times M_{out}\times P)\times Max(T_{DRX}, T_{CSI\text{-}RS}))$	$Max(100, Ceil(1.5\times M_{in}\times P)\times Max(T_{DRX}, T_{CSI\text{-}RS}))$
DRX > 320ms	$Ceil(M_{out}\times P) \times T_{DRX}$	$Ceil(M_{in}\times P) \times T_{DRX}$
NOTE: $T_{CSI\text{-}RS}$ is the periodicity of the CSI-RS resource configured for RLM. The requirements in this table apply for $T_{CSI\text{-}RS}$ equal to 5 ms, 10ms, 20 ms or 40 ms. T_{DRX} is the DRX cycle length.		

Table 8.1.3.2-2: Evaluation period $T_{Evaluate_out_CSI\text{-}RS}$ and $T_{Evaluate_in_CSI\text{-}RS}$ for FR2

Configuration	$T_{Evaluate_out_CSI\text{-}RS}$ (ms)	$T_{Evaluate_in_CSI\text{-}RS}$ (ms)
no DRX	$Max(200, Ceil(M_{out}\times P\times N)\times T_{CSI\text{-}RS})$	$Max(100, Ceil(M_{in}\times P\times N) \times T_{CSI\text{-}RS})$
DRX ≤ 320ms	$Max(200, Ceil(1.5\times M_{out}\times P\times N)\times Max(T_{DRX}, T_{CSI\text{-}RS}))$	$Max(100, Ceil(1.5\times M_{in}\times P\times N)\times Max(T_{DRX}, T_{CSI\text{-}RS}))$
DRX > 320ms	$Ceil(M_{out}\times P\times N) \times T_{DRX}$	$Ceil(M_{in}\times P\times N) \times T_{DRX}$

NOTE: T_{CSI-RS} is the periodicity of the CSI-RS resource configured for RLM. The requirements in this table apply for T_{CSI-RS} equal to 5 ms, 10 ms, 20 ms or 40 ms. T_{DRX} is the DRX cycle length.

Table 8.1.3.2-3: Evaluation period $T_{Evaluate_out_CSI-RS}$ and $T_{Evaluate_in_CSI-RS}$ for FR1 (deactivated PSCell)

Configuration	$T_{Evaluate_out_CSI-RS}$ (ms)	$T_{Evaluate_in_CSI-RS}$ (ms)
no DRX	Ceil(M_{out}×P) × measCyclePSCell	Ceil(M_{in}×P) × measCyclePSCell
DRX ≤ 320ms	Ceil(1.5 ×M_{out}×P) × Max(T_{DRX}, measCyclePSCell)	Ceil(1.5 ×M_{in}×P) × Max(T_{DRX}, measCyclePSCell)
DRX > 320ms	Ceil(M_{out}×P) × Max(T_{DRX}, measCyclePSCell)	Ceil(M_{in}×P) × Max(T_{DRX}, measCyclePSCell)
NOTE: T_{DRX} is the DRX cycle length of SCG. measCyclePSCell is the measurement cycle length of the deactivated PSCell.		

Table 8.1.3.2-4: Evaluation period $T_{Evaluate_out_CSI-RS}$ and $T_{Evaluate_in_CSI-RS}$ for FR2 (deactivated PSCell)

Configuration	$T_{Evaluate_out_CSI-RS}$ (ms)	$T_{Evaluate_in_CSI-RS}$ (ms)
no DRX	Ceil(M_{out}×P×N) × measCyclePSCell	Ceil(M_{in}×P×N) × measCyclePSCell
DRX ≤ 320ms	Ceil(1.5 × M_{out}×P×N) × Max(T_{DRX}, measCyclePSCell)	Ceil(1.5 × M_{in}×P×N) × Max(T_{DRX}, measCyclePSCell)
DRX > 320ms	Ceil(M_{out}×P×N) × Max(T_{DRX}, measCyclePSCell)	Ceil(M_{in}×P×N) × Max(T_{DRX}, measCyclePSCell)
NOTE: T_{DRX} is the DRX cycle length of SCG. measCyclePSCell is the measurement cycle length of the deactivated PSCell.		

8.1.3.3 Measurement restrictions for CSI-RS based RLM

The SSB mentioned in this clause can be associated with either the serving cell PCI or a PCI different from serving cell PCI.

The UE is required to be capable of measuring CSI-RS for RLM without measurement gaps. The UE is required to perform the CSI-RS measurements with measurement restrictions as described in the following clauses.

For both FR1 and FR2, when the CSI-RS for RLM is in the same OFDM symbol as SSB for RLM, BFD, CBD or L1-RSRP measurement, UE is not required to receive CSI-RS for RLM in the PRBs that overlap with an SSB.

For FR1, when the SSB for RLM, BFD, CBD, or L1-RSRP measurement is within the active BWP and has same SCS than CSI-RS for RLM, the UE shall be able to perform CSI-RS measurement without restrictions.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has different SCS than CSI-RS for RLM, the UE shall be able to perform CSI-RS measurement with restrictions according to its capabilities:

- If the UE supports *simultaneousRxDataSSB-DiffNumerology* the UE shall be able to perform CSI-RS for RLM measurement without restrictions.

- If the UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both CSI-RS for RLM and SSB. Longer measurement period for CSI-RS based RLM is expected, and no requirements are defined.

For FR1, when the CSI-RS for RLM is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement, UE shall be able to measure the CSI-RS for RLM without any restriction.

For FR2, when the CSI-RS for RLM measurement on one CC is in the same OFDM symbol as SSB for RLM, BFD, or L1-RSRP measurement on the same CC or different CCs in the same band, or in the same symbol as SSB for CBD measurement on the same CC or different CCs in the same band when beam failure is detected, UE is required to measure one of but not both CSI-RS for RLM and SSB. Longer measurement period for CSI-RS based RLM is expected, and no requirements are defined.

For FR2, when the CSI-RS for RLM measurement on one CC is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band,

- In the following cases, UE is required to measure one of but not both CSI-RS for RLM and the other CSI-RS. Longer measurement period for CSI-RS based RLM is expected, and no requirements are defined.
  - The CSI-RS for RLM or the other CSI-RS in a resource set configured with repetition ON, or
  - The other CSI-RS is configured in q1 and beam failure is detected, or
  - The two CSI-RS-es are not QCL-ed w.r.t. QCL-TypeD, or the QCL information is not known to UE,
- Otherwise, UE shall be able to measure the CSI-RS for RLM without any restriction.

8.1.3.4 Minimum requirement of CSI-RS based radio link monitoring for UE fulfilling relaxed measurement criteria

This clause contains minimum requirements for relaxed radio link monitoring based on CSI-RS.

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{Evaluate_out_CSI-RS_Relax}$ [ms] period becomes worse than the threshold Q_{out_CSI-RS} within $T_{Evaluate_out_CSI-RS_Relax}$ [ms] evaluation period.

$T_{Evaluate_out_CSI-RS_Relax}$ is defined in Table 8.1.3.4-1 for FR1.

$T_{Evaluate_out_CSI-RS_Relax}$ is defined in Table 8.1.3.4-2 for FR2 with scaling factor N=1.

The value of P is defined in clause 8.1.3.2.

Longer evaluation period would be expected if the combination of RLM-RS resource, SMTC occasion and measurement gap configurations does not meet previous conditions.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI,E-UTRAN}$ when the UE is requested to decode an LTE CGI.

The values of M_{out} used in Table 8.1.3.4-1 and Table 8.1.3.4-2 are defined as:

- M_{out} = 20, if the CSI-RS resource configured for RLM is transmitted with higher layer CSI-RS parameter *density* [6, clause 7.4.1] set to 3 and over the bandwidth $\geq$ 24 PRBs.

Table 8.1.3.4-1: Evaluation period $T_{Evaluate_out_CSI-RS_Relax}$ for FR1

Configuration	$T_{Evaluate_out_CSI-RS_Relax}$ (ms)
$Max(T_{DRX}, T_{CSI-RS}) \leq 80$ ms	$Max(200 \times K3^{NOTE3}, Ceil(1.5 \times M_{out} \times P \times K1^{NOTE2}) \times Max(T_{DRX}, T_{CSI-RS})^{NOTE1})$
NOTE1: T_{CSI-RS} is the periodicity of the CSI-RS resource configured for RLM. The requirements in this table apply for T_{CSI-RS} equal to 5 ms, 10ms, 20 ms or 40 ms. T_{DRX} is the DRX cycle length and no longer than 80ms. NOTE2: K1 = 2 for 40 ms < $MAX(T_{DRX}, T_{CSI-RS}) \leq 80$ ms, K1 = 4 for $MAX(T_{DRX}, T_{CSI-RS}) \leq 40$ ms NOTE3: K3 = K1, if K1 ≤ 2; K3 = 1 otherwise.	

Table 8.1.3.4-2: Evaluation period $T_{Evaluate_out_CSI-RS_Relax}$ for FR2

Configuration	$T_{Evaluate_out_CSI-RS_Relax}$ (ms)
$Max(T_{DRX}, T_{CSI-RS}) \leq 80$ ms	$Max(200 \times K4^{NOTE3}, Ceil(1.5 \times M_{out} \times P \times N \times K2^{NOTE2}) \times Max(T_{DRX}, T_{CSI-RS})^{NOTE1})$
NOTE1: T_{CSI-RS} is the periodicity of the CSI-RS resource configured for RLM. The requirements in this table apply for T_{CSI-RS} equal to 5 ms, 10 ms, 20 ms or 40 ms. T_{DRX} is the DRX cycle length and no longer than 80ms. NOTE2: K2 = 2. NOTE3: K4 = K2, if K2 ≤ 2; K4 = 1 otherwise.	

8.1.4 Minimum requirement at transitions

When the UE transitions between DRX and no DRX or when DRX cycle periodicity changes, for each RLM-RS resource, for a duration of time equal to the evaluation period corresponding to the second mode after the transition occurs, the UE shall use an evaluation period that is no less than the minimum of evaluation period corresponding to the first mode and the second mode. Subsequent to this duration, the UE shall use an evaluation period corresponding to the second mode for each RLM-RS resource. This requirement shall be applied to both out-of-sync evaluation and in-sync evaluation of the monitored cell.

When the UE transitions from a first configuration of RLM resources to a second configuration of RLM resources that is different from the first configuration, for each RLM resource present in the second configuration, for a duration of time equal to the evaluation period corresponding to the second configuration after the transition occurs, the UE shall use an evaluation period that is no less than the minimum of evaluation periods corresponding to the first configuration and the second configuration. Subsequent to this duration, the UE shall use an evaluation period corresponding to the second configuration for each RLM resource present in the second configuration. This requirement shall be applied to both out-of-sync evaluation and in-sync evaluation of the monitored cell.

When the UE transitions from a first configuration of active TCI state of the CORESET to a second configuration of active TCI state of the CORESET, for each CSI-RS for RLM present in the second configuration, the UE shall use an evaluation period corresponding to the second configuration from the time of transition. This requirement shall be applied to both out-of-sync evaluation and in-sync evaluation of the monitored cell.

8.1.5 Minimum requirement for UE turning off the transmitter

The transmitter power of the UE in the monitored cell shall be turned off within 40ms after expiry of T310 timer as specified in TS 38.331 [2].

8.1.6 Minimum requirement for L1 indication

When the downlink radio link quality on all the configured RLM-RS resources is worse than Q_{out}, layer 1 of the UE shall send an out-of-sync indication for the cell to the higher layers. A layer 3 filter shall be applied to the out-of-sync indications as specified in TS 38.331 [2].

When the downlink radio link quality on at least one of the configured RLM-RS resources is better than Q_{in}, layer 1 of the UE shall send an in-sync indication for the cell to the higher layers. A layer 3 filter shall be applied to the in-sync indications as specified in TS 38.331 [2].

The out-of-sync and in-sync evaluations for the configured RLM-RS resources shall be performed as specified in clause 5 in TS 38.213 [3]. Two successive indications from layer 1 shall be separated by at least $T_{Indication_interval}$.

When DRX is not used $T_{Indication_interval}$ is max(10ms, $T_{RLM\text{-}RS,M}$), where $T_{RLM\text{-}RS,M}$ is the shortest periodicity of all configured RLM-RS resources for the monitored cell, which corresponds to T_{SSB} specified in clause 8.1.2 if the RLM-RS resource is SSB, or $T_{CSI\text{-}RS}$ specified in clause 8.1.3 if the RLM-RS resource is CSI-RS.

In case DRX is used, $T_{Indication_interval}$ is Max(10ms, 1.5 × DRX_cycle_length, 1.5 × $T_{RLM\text{-}RS,M}$)) if DRX cycle_length is less than or equal to 320ms, and $T_{Indication_interval}$ is DRX_cycle_length if DRX cycle_length is greater than 320ms. Upon start of T310 timer as specified in TS 38.331 [2], the UE shall monitor the configured RLM-RS resources for recovery using the evaluation period and layer 1 indication interval corresponding to the no DRX mode until the expiry or stop of T310 timer.

For deactivated PSCell, when DRX is not used $T_{Indication_interval}$ is Max (10ms, *measCyclePSCell*). In case DRX is used, $T_{Indication_interval}$ is Max(10ms, 1.5 × DRX_cycle_length, 1.5 × *measCyclePSCell*)) if DRX cycle_length is less than or equal to 320ms, and $T_{Indication_interval}$ is Max (DRX_cycle_length, *measCyclePSCell*) if DRX cycle_length is greater than 320ms.

8.1.7 Scheduling availability of UE during radio link monitoring

When the reference signal to be measured for RLM has different subcarrier spacing than PDSCH/PDCCH or is on frequency range 2, there are restrictions on the scheduling availability as described in the following clauses.

8.1.7.1 Scheduling availability of UE performing radio link monitoring with a same subcarrier spacing as PDSCH/PDCCH on FR1

There are no scheduling restrictions due to radio link monitoring performed with a same subcarrier spacing as PDSCH/PDCCH on FR1.

8.1.7.2 Scheduling availability of UE performing radio link monitoring with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UEs which support *simultaneousRxDataSSB-DiffNumerology* [14] there are no restrictions on scheduling availability due to radio link monitoring based on SSB as RLM-RS. For UEs which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to radio link monitoring based on SSB as RLM -RS.

- The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH or CSI-RS for tracking or CSI-RS for CQI on SSB symbols to be measured for radio link monitoring.

When intra-band carrier aggregation in FR1 is performed, the scheduling restrictions on FR1 serving PCell or PSCell applies to all serving cells in the same band on the symbols that fully or partially overlap with the restricted symbols. When inter-band carrier aggregation within FR1 is performed, there are no scheduling restrictions on FR1 serving cell(s) in the bands due to radio link monitoring performed on FR1 serving PCell or PSCell in different bands.

8.1.7.3 Scheduling availability of UE performing radio link monitoring on FR2

The following scheduling restriction applies due to radio link monitoring on an FR2 serving PCell and/or PSCell.

- If the RLM-RS is CSI-RS which is type-D QCLed with active TCI state for PDCCH or PDSCH, and the CSI-RS is not in a CSI-RS resource set with repetition ON,
  - There are no scheduling restrictions due to radio link monitoring based on the CSI-RS.
- Otherwise
  - For FR2-1 or the RLM-RS is not using 480 kHz SCS or 960 kHz SCS on FR2-2, the UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH or CSI-RS for tracking or CSI-RS for CQI on RLM-RS symbols to be measured for radio link monitoring.
  - For FR2-2 and the RLM-RS is using 480 kHz SCS or 960 kHz SCS, the UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH or CSI-RS for tracking or CSI-RS for CQI on RLM-RS symbols to be measured for radio link monitoring, and on one data symbol before each RLM-RS symbol to be measured and one data symbol after each RLM-RS symbol to be measured.

When intra-band carrier aggregation in FR2 is performed, the scheduling restrictions on FR2 serving PCell or PSCell applies to all serving cells in the same band on the symbols that fully or partially overlap with restricted symbols.

When inter-band carrier aggregation in FR2 is performed, there are no scheduling restrictions on FR2 serving cell(s) in the bands for the following cases, provided that UE is capable of independent beam management on this FR2 band pair:

- when performing radio link monitoring performed on FR2 serving PCell or PSCell in different bands,
- the UE is configured with same or different numerology between SSB on one FR2 band and data on the other FR2 band.

For FR2, if following conditions are met,

- UE has been notified about system information update through paging,
- The gap between UE's reception of PDCCH that UE monitors in the Type2-PDCCH CSS set and that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots,

For the SSB for RLM and CORESET for RMSI scheduling multiplexing patterns 3, UE is expected to receive the PDCCH that UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured for RLM; and

For the SSB for RLM and CORESET for RMSI scheduling multiplexing patterns 2, UE is expected to receive PDSCH that corresponds to the PDCCH that UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured for RLM.

8.1.7.4 Scheduling availability of UE performing radio link monitoring on FR1 or FR2 in case of FR1-FR2 inter-band CA and NR-DC

There are no scheduling restrictions on FR1 serving cell(s) due to radio link monitoring performed on FR2 serving PCell and/or PSCell.

There are no scheduling restrictions on FR2 serving cell(s) due to radio link monitoring performed on FR1 serving PCell and/or PSCell.

8.1A Radio Link Monitoring with CCA on Target Frequency

8.1A.1 Introduction

The requirements in clause 8.1A apply for radio link monitoring on a carrier frequency with CCA for cells:

- PCell in SA NR operation mode,
- PSCell in EN-DC operation mode.
- PSCell in NR-DC operation mode.

The UE shall monitor the downlink radio link quality based on the reference signal configured as RLM-RS resource(s) in order to detect the downlink radio link quality of the PCell and PSCell as specified in TS 38.213 [3]. The configured RLM-RS resources can be all SSBs, or all CSI-RSs, or a mix of SSBs and CSI-RSs. UE is not required to perform RLM outside the active DL BWP.

On each RLM-RS resource, the UE shall estimate the downlink radio link quality and compare it to the thresholds $Q_{out,CCA}$ and $Q_{in,CCA}$ for the purpose of monitoring downlink radio link quality of the cell.

The threshold $Q_{out,CCA}$ is defined as the level at which the downlink radio link cannot be reliably received and shall correspond to the out-of-sync block error rate ($BLER_{out,CCA}$) as defined in Table 8.1A.1-1. For SSB based radio link monitoring, $Q_{out_SSB,CCA}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 8.1A.2.1-1.

The threshold $Q_{in,CCA}$ is defined as the level at which the downlink radio link quality can be received with significantly higher reliability than at $Q_{out,CCA}$ and shall correspond to the in-sync block error rate ($BLER_{in}$) as defined in Table 8.1A.1-1. For SSB based radio link monitoring, $Q_{in_SSB,CCA}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 8.1A.2.1-2.

The out-of-sync block error rate ($BLER_{out,CCA}$) and in-sync block error rate ($BLER_{in,CCA}$) are determined from the network configuration via parameter *rlmInSyncOutOfSyncThreshold* signalled by higher layers. When UE is not configured with *rlmInSyncOutOfSyncThreshold* from the network, UE determines out-of-sync and in-sync block error rates from Configuration #0 in Table 8.1A.1-1 as default. All requirements in clause 8.1A are applicable for BLER Configuration #0 in Table 8.1A.1-1.

Table 8.1A.1-1: Out-of-sync and in-sync block error rates

Configuration	$BLER_{out,CCA}$	$BLER_{in,CCA}$
0	10%	2%

UE shall be able to monitor up to N_{RLM} RLM-RS resources of the same or different types in each corresponding carrier frequency range, depending on a maximum number L_{max} of SSBs per half frame according to TS 38.213 [3], where N_{RLM} is specified in Table 8.1A.1-2, and meet the requirements as specified in clause 8.1A. UE is not required to meet the requirements in clause 8.1A if RLM-RS is not configured and no TCI state for PDCCH is activated.

Table 8.1A.1-2: Maximum number of RLM-RS resources N_{RLM}

Carrier frequency range of PCell/PSCell	L_{max}	Maximum number of RLM-RS resources, N_{RLM}
FR1	8	4
FR2-2	64	8

In the requirements of clause 8.1A, the term RLM-RS SSB occasion not available at the UE refers to when the RLM-RS SSB is configured by gNB in a cell on a carrier frequency subject to CCA, but the first two successive candidate SSB positions for the same SSB index within the set of configured RLM-RS resources are not available at the UE due to DL CCA failures at gNB during the corresponding evaluation period; otherwise the RLM-RS SSB is considered as available at the UE.

The requirements in clause 8.1A apply for any *channelAccessMode* configuration [TS 38.331, 2].

8.1A.2 Requirements for SSB Based Radio Link Monitoring

8.1A.2.1 Introduction

The requirements in this clause apply for each SSB based RLM-RS resource configured for PCell or PSCell, provided that the SSB configured for RLM are actually configured to be transmitted within UE active DL BWP during the entire evaluation period specified in clause 8.1A.2.2 but occasionally may not be transmitted due to CCA operation.

Table 8.1A.2.1-1: PDCCH transmission parameters for out-of-sync evaluation

Attribute	Value for BLER Configuration #0
DCI format	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	8
Ratio of hypothetical PDCCH RE energy to average SSS RE energy	4 dB
Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	4 dB
Bandwidth (PRBs)	24
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed

Table 8.1A.2.1-2: PDCCH transmission parameters for in-sync evaluation

Attribute	Value for BLER Configuration #0
DCI payload size	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	4
Ratio of hypothetical PDCCH RE energy to average SSS RE energy	0dB
Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	0dB
Bandwidth (PRBs)	24
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed

8.1A.2.2 Minimum Requirement

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{Evaluate_out_SSB,CCA}$ [ms] period becomes worse than the threshold $Q_{out_SSB,CCA}$ within $T_{Evaluate_out_SSB,CCA}$ [ms] evaluation period.

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{Evaluate_in_SSB,CCA}$ [ms] period becomes better than the threshold $Q_{in_SSB,CCA}$ within $T_{Evaluate_in_SSB,CCA}$ [ms] evaluation period. During the in-sync evaluation procedure, layer 1 of the UE shall not send any in-sync indication for the cell to the higher layers when L_{in} exceeds $L_{in,max}$, where L_{in} and $L_{in,max}$ are defined in Table 8.1A.2.2-1.

$T_{Evaluate_out_SSB,CCA}$ and $T_{Evaluate_in_SSB,CCA}$ are defined in Table 8.1A.2.2-1 for FR1.

$T_{Evaluate_out_SSB,CCA}$ and $T_{Evaluate_in_SSB,CCA}$ are defined in Table 8.1A.2.2-2 for FR2-2 with scaling factor N = 12.

When concurrent gaps are configured,

- P value for an RLM-RS resource to be measured is defined as N_{total} / $N_{outside_MG}$
- For a window W of duration max(T_{L1}, MGRP_max), where MGRP max is the maximum MGRP across all configured per-UE measurement gap and per-FR measurement gap within the same FR as serving cell, and starting at the beginning of any RLM-RS resource occasion:
  - N_{total} is the total number of RLM-RS resource occasions within the window, including those overlapped with measurement gap occasions within the window, and
  - $N_{outside_MG}$ is the number of RLM-RS resource occasions that are not overlapped with any measurement gap occasion within the window W

Otherwise, for a UE not supporting *concurrentMeasGap-r17* or when concurrent gaps are not configured,

For FR1,

- $P = \frac{1}{1-\frac{T_{SSB}}{xGP}}$, when in the monitored cell there are GAPs configured for intra-frequency, inter-frequency or inter-RAT measurements, and these GAPs are overlapping with some but not all occasions of the SSB RLM-RS resources; and
- P=1 when in the monitored cell there are no GAPs overlapping with any occasion of the SSB RLM-RS resources.

When a measurement gap is configured and the measurement gap is not NCSG,

- an RLM-RS resource is considered to be overlapped with the GAP f it overlaps a measurement gap occasion, and
- xRP = MGRP

Otherwise, when NCSG measurement gap is configured,

- an RLM-RS resource is considered to be overlapped with the GAP if it overlaps the VIL1 or VIL2 of NCSG, and
- xRP = VIRP

If the UE is configured with Pre-MG, an RLM-RS resource is only considered to be overlapped by the Pre-MG if the Pre-MG is activated.

When concurrent gaps are configured, an RLM-RS is not considered to be overlapped by a gap occasion if the gap occasion is dropped according to 9.1.8.

For FR2-2,

- $P = \frac{1}{1-\frac{T_{SSB}}{T_{SMTCperiod}}}$, when RLM-RS resource is not overlapped with measurement gap and the RLM-RS resource is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$).

- P is $P_{sharing\ factor}$, when the RLM-RS resource is not overlapped with measurement gap and RLM-RS resource is fully overlapped with SMTC period ($T_{SSB} = T_{SMTCperiod}$).

- $P = \frac{1}{1-\frac{T_{SSB}}{MGRP}-\frac{T_{SSB}}{T_{SMTCperiod}}}$, when the RLM-RS resource is partially overlapped with measurement gap and the RLM-RS resource is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and

  - $T_{SMTCperiod} \neq$ MGRP or

  - $T_{SMTCperiod}$ = MGRP and $T_{SSB} < 0.5*T_{SMTCperiod}$

- $P = \frac{P_{sharing\ factor}}{1-\frac{T_{SSB}}{MGRP}}$, when the RLM-RS is partially overlapped with measurement gap and the RLM-RS is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and $T_{SMTCperiod}$ = MGRP and $T_{SSB} = 0.5 \times T_{SMTCperiod}$

- $P = \frac{1}{1-\frac{T_{SSB}}{T_{SMTCperiod}}}$, when the RLM-RS resource is partially overlapped with measurement gap and the RLM-RS resource is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with measurement gap

- $P = \frac{P_{sharing\ factor}}{1-\frac{T_{SSB}}{MRGP}}$, when the RLM-RS resource is partially overlapped with measurement gap and the RLM-RS resource is fully overlapped with SMTC occasion ($T_{SSB} = T_{SMTCperiod}$) and SMTC occasion is partially overlapped with measurement gap ($T_{SMTCperiod} <$ MGRP)

- $P_{sharing\ factor} = 1$, if the RLM-RS resource outside measurement gap is

  - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and K data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and K data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and K is defined in clause 9.2.5.3.3, and,

  - not overlapped by the RSSI symbols indicated by *ss-RSSI-Measurement* and K data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and K data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured, and K is defined in clause 9.2.5.3.3.

- $P_{sharing\ factor} = 3$, otherwise.

where,

If the high layer in TS 38.331 [2] signaling of *smtc2* is present, $T_{SMTCperiod}$ follows *smtc2*; Otherwise $T_{SMTCperiod}$ follows *smtc1*. $T_{SMTCperiod}$ is the shortest SMTC period among all CCs in the same FR2-2 band, provided the SMTC offset of all CCs in FR2-2 have the same offset.

Longer evaluation period would be expected if the combination of RLM-RS resource, SMTC occasion and GAP configurations does not meet previous conditions.

Table 8.1A.2.2-1: Evaluation period $T_{Evaluate_out_SSB,CCA}$ and $T_{Evaluate_in_SSB,CCA}$ for FR1

Configuration	$T_{Evaluate_out_SSB,CCA}$ (ms)		$T_{Evaluate_in_SSB,CCA}$ (ms)
	RLM-RS SSB Es/Iot[Note4] ≥-7 dB	RLM-RS SSB Es/Iot[Note4] <-7 dB	
no DRX	Max(200, Ceil(17*P)*T_{SSB})	Max(200, Ceil(24*P)*T_{SSB})	Max(100, Ceil((5+L_{in})*P)*T_{SSB})
DRX cycle≤320	Max(200, Ceil(1.5*15*P)*Max(T_{DRX},T_{SSB}))	Max(200, Ceil(1.5*20*P)*Max(T_{DRX},T_{SSB}))	Max(100, Ceil(1.5*(5+L_{in})*P)*Max(T_{DRX},T_{SSB}))

DRX cycle>320	Ceil(13*P)*T_{DRX}	Ceil(16*P)*T_{DRX}	Ceil((5+L_{in})*P)*T_{DRX}

NOTE 1: T_{SSB} is the periodicity of the SSB configured for RLM. T_{DRX} is the DRX cycle length.
NOTE 2: When DRX is not configured, L_{in} is the number of RLM-RS SSB occasions which are not available at the UE during $T_{Evaluate_in_SSB,CCA}$, where $L_{in} \le L_{in,max}$. When DRX is configured, L_{in} is the number of DRX cycles in which at least one RLM-RS SSB occasion is not available at the UE during $T_{Evaluate_in_SSB,CCA}$, where $L_{in} \le L_{in,max}$. The UE is not required to determine the availability of SSB occasions more frequent than
Once per Max(10ms, P * T_{SSB}) if no DRX is used,
Once per Max(10ms, Ceil(1.5 * P) * Max(T_{DRX}, T_{SSB})) if DRX cycle ≤ 320ms,
Once per P * T_{DRX} if DRX cycle > 320ms.
NOTE 3: $L_{in,max}$=7 for Max(T_{DRX},T_{SSB}) ≤ 40 assuming T_{DRX}=0 for non-DRX case,
$L_{in,max}$=5 for 40<Max(T_{DRX},T_{SSB})≤320,
$L_{in,max}$=3 for T_{DRX}>320.
NOTE 4: RLM-RS SSB Es/Iot is the averaged Es/Iot over the most recent previous out-of-sync evaluation period.

Table 8.1A.2.2-2: Evaluation period $T_{Evaluate_out_SSB,CCA}$ and $T_{Evaluate_in_SSB,CCA}$ for FR2-2

Configuration	$T_{Evaluate_out_SSB,CCA}$ (ms)	$T_{Evaluate_in_SSB,CCA}$ (ms)
no DRX	Max(200, Ceil([12]*P* N)*T_{SSB})	Max(100, Ceil((5 +L_{in})*P* N)*T_{SSB})
DRX cycle≤320	Max(200, Ceil(1.5*[10]*P* N)*Max(T_{DRX},T_{SSB}))	Max(100, Ceil(1.5*(5 +L_{in})*P* N)*Max(T_{DRX},T_{SSB}))
DRX cycle>320	Ceil([10]*P* N)*T_{DRX}	Ceil((5+L_{in})*P* N)*T_{DRX}

NOTE 1: T_{SSB} is the periodicity of the SSB configured for RLM. T_{DRX} is the DRX cycle length.
NOTE 2: When DRX is not configured, L_{in} is the number of RLM-RS SSB occasions groups which are not available at the UE during $T_{Evaluate_in_SSB,CCA}$, where $L_{in} \le L_{in,max}$. A RLM-RS SSB occasions group consists of N consecutive RLM-RS SSB occasions, and the RLM-RS SSB occasions group is not available at the UE when at least one RLM-SSB occasion in the group is not transmitted by the gNB. When DRX is configured, L_{in} is the number of DRX cycles groups which are not available at the UE during $T_{Evaluate_in_SSB,CCA}$, where Lin ≤ $L_{in,max}$. A DRX group consists of N DRX cycles, and the DRX group is not available when there is at least one DRX in which at least one RLM-RS SSB occasion is not available. The UE is not required to determine the availability of SSB occasions more frequent than once per DRX cycle length, when configured with DRX.
NOTE 3: $L_{in,max}$=7 for Max(T_{DRX},T_{SSB}) ≤ 40 assuming T_{DRX}=0 for non-DRX case,
$L_{in,max}$=5 for 40<Max(T_{DRX},T_{SSB})≤320,
$L_{in,max}$=3 for T_{DRX}>320.

8.1A.2.3 Measurement Restrictions for SSB based RLM

The UE is required to be capable of measuring SSB for RLM without measurement gaps. The UE is required to perform the SSB measurements with measurement restrictions as described in the following clauses.

For FR1, when the SSB for RLM is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for RLM without any restriction;
- If SSB and CSI-RS have different SCS,
  - If UE supports *simultaneousRxDataSSB-DiffNumerology*, UE shall be able to measure the SSB for RLM without any restriction;
  - If UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure SSB for RLM.

For FR2-2, when the SSB for RLM measurement on one CC is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both SSB for RLM and CSI-RS. Longer measurement period for SSB based RLM is expected, and no requirements are defined.

8.1A.3 Minimum requirement at transitions

When the UE transitions between DRX and no DRX or when DRX cycle periodicity changes, for each RLM-RS resource, for a duration of time equal to the evaluation period corresponding to the second mode after the transition occurs, the UE shall use an evaluation period that is no less than the minimum of evaluation period corresponding to the first mode and the second mode. Subsequent to this duration, the UE shall use an evaluation period corresponding to the second mode for each RLM-RS resource. This requirement shall be applied to both out-of-sync evaluation and in-sync evaluation of the monitored cell.

When the UE transitions from a first configuration of RLM resources to a second configuration of RLM resources that is different from the first configuration, for each RLM resource present in the second configuration, for a duration of time equal to the evaluation period corresponding to the second configuration after the transition occurs, the UE shall use an evaluation period that is no less than the minimum of evaluation periods corresponding to the first configuration and the second configuration. Subsequent to this duration, the UE shall use an evaluation period corresponding to the second configuration for each RLM resource present in the second configuration. This requirement shall be applied to both out-of-sync evaluation and in-sync evaluation of the monitored cell.

8.1A.4 Minimum requirement for UE turning off the transmitter

The transmitter power of the UE in the monitored cell shall be turned off within 40ms after expiry of T310 timer as specified in TS 38.331 [2]. The UE shall not perform CCA procedure on any of the serving carrier frequencies with CCA after the expiry of T310.

8.1A.5 Minimum requirement for L1 indication

When the downlink radio link quality on all the configured RLM-RS resources is worse than $Q_{out,CCA}$, layer 1 of the UE shall send an out-of-sync indication for the cell to the higher layers. A layer 3 filter shall be applied to the out-of-sync indications as specified in TS 38.331 [2].

When the downlink radio link quality on at least one of the configured RLM-RS resources is better than $Q_{in,CCA}$, layer 1 of the UE shall send an in-sync indication for the cell to the higher layers. A layer 3 filter shall be applied to the in-sync indications as specified in TS 38.331 [2].

The out-of-sync and in-sync evaluations for the configured RLM-RS resources shall be performed as specified in clause 5 in TS 38.213 [3]. Two successive indications from layer 1 shall be separated by at least $T_{Indication_interval,CCA}$.

When DRX is not used $T_{Indication_interval,CCA}$ is max(10ms, $T_{RLM\text{-}RS,M}$), where $T_{RLM,M}$ is the shortest periodicity of all configured RLM-RS resources for the monitored cell, which corresponds to T_{SSB} specified in clause 8.1A.2 if the RLM-RS resource is SSB.

In case DRX is used, $T_{Indication_interval,CCA}$ is Max(10ms, 1.5 × DRX_cycle_length, 1.5 × $T_{RLM\text{-}RS,M}$)) if DRX cycle_length is less than or equal to 320ms, and $T_{Indication_interval,CCA}$ is DRX_cycle_length if DRX cycle_length is greater than 320ms. Upon start of T310 timer as specified in TS 38.331 [2], the UE shall monitor the configured RLM-RS resources for recovery using the evaluation period and layer 1 indication interval corresponding to the no DRX mode until the expiry or stop of T310 timer.

8.1A.6 Scheduling availability of UE during radio link monitoring

When the reference signal to be measured for RLM on a carrier frequency with CCA has different subcarrier spacing than PDSCH/PDCCH, there are restrictions on the scheduling availability as described in the following clauses.

8.1A.6.1 Scheduling availability of UE performing radio link monitoring with the same subcarrier spacing as PDSCH/PDCCH on FR1

There are no scheduling restrictions due to radio link monitoring performed with a same subcarrier spacing as PDSCH/PDCCH on FR1.

8.1A.6.2 Scheduling availability of UE performing radio link monitoring with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UEs which support *simultaneousRxDataSSB-DiffNumerology* [14] there are no restrictions on scheduling availability due to radio link monitoring based on SSB as RLM-RS. For UEs which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to radio link monitoring based on SSB as RLM -RS.

- The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH or CSI-RS for tracking or CSI-RS for CQI on SSB symbols to be measured for radio link monitoring.

When intra-band carrier aggregation is performed, the scheduling restrictions on PCell or PSCell applies to all serving cells in the same band on the symbols that fully or partially overlap with the restricted symbols.

8.1A.6.3 Scheduling availability of UE performing radio link monitoring on FR2-2

The following scheduling restriction applies due to radio link monitoring on an FR2-2 serving PCell and/or PSCell.

- If the RLM-RS is CSI-RS which is type-D QCLed with active TCI state for PDCCH or PDSCH, and the CSI-RS is not in a CSI-RS resource set with repetition ON,
  - There are no scheduling restrictions due to radio link monitoring based on the CSI-RS.
- Otherwise
  - When the RLM-RS is using 120 KHz SCS, the UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH or CSI-RS for tracking or CSI-RS for CQI on RLM-RS symbols to be measured for radio link monitoring.
  - When the RLM-RS is using 480 kHz SCS or 960 kHz SCS, the UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH or CSI-RS for tracking or CSI-RS for CQI on RLM-RS resource symbols to be measured for radio link monitoring, and on one data symbol before each RLM-RS symbol to be measured and one data symbol after each RLM-RS symbol to be measured.

When intra-band carrier aggregation in FR2-2 is performed, the scheduling restrictions on FR2-2 serving PCell or PSCell applies to all serving cells in the same band on the symbols that fully or partially overlap with restricted symbols.

For FR2-2, if following conditions are met,

- UE has been notified about system information update through paging,
- The gap between UE’s reception of PDCCH that UE monitors in the Type2-PDCCH CSS set and that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots,

For the SSB for RLM and CORESET for RMSI scheduling multiplexing patterns 3, UE is expected to receive the PDCCH that UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured for RLM; and

For the SSB for RLM and CORESET for RMSI scheduling multiplexing patterns 2, UE is expected to receive PDSCH that corresponds to the PDCCH that UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured for RLM.

8.1A.6.4 Scheduling availability of UE performing radio link monitoring on FR1 or FR2-2 in case of FR1-FR2-2 inter-band CA and NR-DC

There are no scheduling restrictions on FR1 serving cell(s) due to radio link monitoring performed on FR2-2 serving PCell and/or PSCell.

There are no scheduling restrictions on FR2-2 serving cell(s) due to radio link monitoring performed on FR1 serving PCell and/or PSCell.

8.1B Radio Link Monitoring for RedCap

8.1B.1 Introduction

The requirements in clause 8.1B apply for radio link monitoring on UE with reduced capabilites:

- PCell in SA NR operation mode,

The UE shall monitor the downlink radio link quality based on the reference signal configured as RLM-RS resource(s) in order to detect the downlink radio link quality of the PCell as specified in TS 38.213 [3]. The configured RLM-RS resources can be all SSBs, or all CSI-RSs, or a mix of SSBs and CSI-RSs. UE is not required to perform RLM outside the active DL BWP. The SSB and SMTC in this section applies for both CD-SSB and NCD-SSB if it is not additional specified.

On each RLM-RS resource, the UE shall estimate the downlink radio link quality and compare it to the thresholds $Q_{out,RedCap}$ and $Q_{in,RedCap}$ for the purpose of monitoring downlink radio link quality of the cell.

The threshold $Q_{out,RedCap}$ is defined as the level at which the downlink radio link cannot be reliably received and shall correspond to the out-of-sync block error rate ($BLER_{out}$) as defined in Table 8.1B.1-1. For SSB based radio link monitoring, $Q_{out_SSB,RedCap}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 8.1B.2.1-1. For CSI-RS based radio link monitoring, $Q_{out_CSI-RS,RedCap}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 8.1B.3.1-1.

The threshold $Q_{in,RedCap}$ is defined as the level at which the downlink radio link quality can be received with significantly higher reliability than at $Q_{out,RedCap}$ and shall correspond to the in-sync block error rate ($BLER_{in,RedCap}$) as defined in Table 8.1B.1-1. For SSB based radio link monitoring, $Q_{in_SSB,RedCap}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 8.1B.2.1-2. For CSI-RS based radio link monitoring, $Q_{in_CSI-RS,RedCap}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 8.1B.3.1-2.

The out-of-sync block error rate ($BLER_{out,RedCap}$) and in-sync block error rate ($BLER_{in,RedCap}$) are determined from the network configuration via parameter *rlmInSyncOutOfSyncThreshold* signalled by higher layers. When UE is not configured with *rlmInSyncOutOfSyncThreshold* from the network, UE determines out-of-sync and in-sync block error rates from Configuration #0 in Table 8.1B.1-1 by default. All requirements in clause 8.1B are applicable for BLER Configuration #0 in Table 8.1B.1-1.

Table 8.1B.1-1: Out-of-sync and in-sync block error rates for RedCap UE

Configuration	$BLER_{out,RedCap}$	$BLER_{in,RedCap}$
0	10%	2%

UE shall be able to monitor up to N_{RLM} RLM-RS resources of the same or different types in each corresponding carrier frequency range, depending on a maximum number L_{max} of SSBs per half frame according to TS 38.213 [3], where N_{RLM} is specified in Table 8.1B.1-2 according TS 38.213 [3], and meet the requirements as specified in clause 8.1B. UE is not required to meet the requirements in clause 8.1B if RLM-RS is not configured and no TCI state for PDCCH is activated.

Table 8.1B.1-2: Maximum number of RLM-RS resources N_{RLM} for RedCap UE

Carrier frequency range of PCell	L_{max}	Maximum number of RLM-RS resources, N_{RLM}
FR1, ≤ 3 GHz[Note]	4	2
FR1, > 3 GHz[Note]	8	4
FR2	64	8
NOTE: For unpaired spectrum operation with Case C - 30 kHz SCS, 3GHz is replaced by 1.88GHz, as specified in clause 4.1 in TS 38.213 [3].		

8.1B.2 Requirements for SSB based radio link monitoring

8.1B.2.1 Introduction

The requirements in this clause apply for each SSB based RLM-RS resource configured for PCell, provided that the SSB configured for RLM is actually transmitted within UE active DL BWP during the entire evaluation period specified in clause 8.1B.2.2.

Table 8.1B.2.1-1: PDCCH transmission parameters for out-of-sync evaluation for RedCap UE

Attribute	Value for BLER Configuration #0
DCI format	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	16; for RedCap UE with 1Rx branch. 8; for RedCap UE with 2Rx branches.
Ratio of hypothetical PDCCH RE energy to average SSS RE energy	4dB
Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	4dB
Bandwidth (PRBs)	48; for RedCap UE with 1Rx branch. 24; for RedCap UE with 2Rx branches.
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed
Note: SCS = 60KHz is not applicable for FR1.	

Table 8.1B.2.1-2: PDCCH transmission parameters for in-sync evaluation for RedCap UE

Attribute	Value for BLER Configuration #0
DCI payload size	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	8; for RedCap UE with 1Rx branch. 4; for RedCap UE with 2Rx branches.
Ratio of hypothetical PDCCH RE energy to average SSS RE energy	0dB
Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	0dB
Bandwidth (PRBs)	48; for RedCap UE with 1Rx branch. 24; for RedCap UE with 2Rx branches.
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed
Note: SCS = 60KHz is not applicable for FR1.	

8.1B.2.2 Minimum requirement

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{Evaluate_out_SSB,RedCap}$ [ms] period becomes worse than the threshold $Q_{out_SSB,RedCap}$ within $T_{Evaluate_out_SSB,RedCap}$ [ms] evaluation period.

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{Evaluate_in_SSB,RedCap}$ [ms] period becomes better than the threshold $Q_{in_SSB,RedCap}$ within $T_{Evaluate_in_SSB,RedCap}$ [ms] evaluation period.

$T_{Evaluate_out_SSB,RedCap}$ and $T_{Evaluate_in_SSB,RedCap}$ are defined in Table 8.1B.2.2-1 and Table 8.1B.2.2-3 for FR1 for UE with 2Rx RedCap and 1Rx RedCap, respectively.

$T_{Evaluate_out_SSB,RedCap}$ and $T_{Evaluate_in_SSB,RedCap}$ are defined in Table 8.1B.2.2-2 and for FR2 with scaling factor N=8 for 2Rx RedCap.

For FR1,

- $P = \frac{1}{1-\frac{T_{SSB}}{MGRP}}$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, and these measurement gaps are overlapping with some but not all occasions of the SSB; and

- P = 1 when in the monitored cell there are no measurement gaps overlapping with any occasion of the SSB.

For FR2,

- $P = \frac{1}{1-\frac{T_{SSB}}{T_{SMTCperiod}}}$, when RLM-RS resource is not overlapped with measurement gap and the RLM-RS resource is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$).

- P is $P_{sharing\ factor}$, when the RLM-RS resource is not overlapped with measurement gap and RLM-RS resource is fully overlapped with SMTC period ($T_{SSB} = T_{SMTCperiod}$).

- $P = \frac{1}{1-\frac{T_{SSB}}{MGRP}-\frac{T_{SSB}}{T_{SMTCperiod}}}$, when the RLM-RS resource is partially overlapped with measurement gap and the RLM-RS resource is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and

  - $T_{SMTCperiod} \neq$ MGRP or

  - $T_{SMTCperiod}$ = MGRP and $T_{SSB} < 0.5*T_{SMTCperiod}$

- $P = \frac{P_{sharing\ factor}}{1-\frac{T_{SSB}}{MGRP}}$, when the RLM-RS is partially overlapped with measurement gap and the RLM-RS is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and $T_{SMTCperiod}$ = MGRP and $T_{SSB} = 0.5 \times T_{SMTCperiod}$

- $P = \frac{1}{1-\frac{T_{SSB}}{T_{SMTCperiod}}}$, when the RLM-RS resource is partially overlapped with measurement gap and the RLM-RS resource is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with measurement gap

- $P = \frac{P_{sharing\ factor}}{1-\frac{T_{SSB}}{MRGP}}$, when the RLM-RS resource is partially overlapped with measurement gap and the RLM-RS resource is fully overlapped with SMTC occasion ($T_{SSB} = T_{SMTCperiod}$) and SMTC occasion is partially overlapped with measurement gap ($T_{SMTCperiod} <$ MGRP)

- $P_{sharing\ factor}$ = 1, if the RLM-RS resource outside measurement gap is

  - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and,

  - not overlapped by the RSSI symbols indicated by *ss-RSSI-Measurement* and 1 data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured.

- $P_{sharing\ factor}$ = 3, otherwise.

where,

If the high layer in TS 38.331 [2] signaling of *smtc2* is present, $T_{SMTCperiod}$ follows *smtc2*; Otherwise $T_{SMTCperiod}$ follows *smtc1*.

If the high layer in TS 38.331 [2] signaling of *smtc2* is present, $T_{SMTCperiod}$ follows *smtc2*; Otherwise $T_{SMTCperiod}$ follows *smtc1*.

Longer evaluation period would be expected if the combination of RLM-RS resource, SMTC occasion and measurement gap configurations does not meet previous conditions.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI,E\text{-}UTRAN}$ when the UE is requested to decode an LTE CGI.

Table 8.1B.2.2-1: Evaluation period $T_{Evaluate_out_SSB,RedCap}$ and $T_{Evaluate_in_SSB,RedCap}$ for FR1 for 2Rx RedCap UE

Configuration	$T_{Evaluate_out_SSB,RedCap}$ (ms)	$T_{Evaluate_in_SSB,RedCap}$ (ms)
no DRX	$\text{Max}(200, \text{Ceil}(10 \times P) \times T_{SSB})$	$\text{Max}(100, \text{Ceil}(5 \times P) \times T_{SSB})$
DRX cycle≤320ms	$\text{Max}(200, \text{Ceil}(15 \times P) \times \text{Max}(T_{DRX}, T_{SSB}))$	$\text{Max}(100, \text{Ceil}(7.5 \times P) \times \text{Max}(T_{DRX}, T_{SSB}))$
DRX cycle>320ms	$\text{Ceil}(10 \times P) \times T_{DRX}$	$\text{Ceil}(5 \times P) \times T_{DRX}$
NOTE: T_{SSB} is the periodicity of the SSB configured for RLM. T_{DRX} is the DRX cycle length.		

Table 8.1B.2.2-2: Evaluation period $T_{Evaluate_out_SSB,RedCap}$ and $T_{Evaluate_in_SSB,RedCap}$ for FR2 for 2Rx RedCap UE

Configuration	$T_{Evaluate_out_SSB,RedCap}$ (ms)	$T_{Evaluate_in_SSB,RedCap}$ (ms)
no DRX	$\text{Max}(200, \text{Ceil}(10 \times P \times N) \times T_{SSB})$	$\text{Max}(100, \text{Ceil}(5 \times P \times N) \times T_{SSB})$
DRX cycle≤320ms	$\text{Max}(200, \text{Ceil}(15 \times P \times N) \times \text{Max}(T_{DRX}, T_{SSB}))$	$\text{Max}(100, \text{Ceil}(7.5 \times P \times N) \times \text{Max}(T_{DRX}, T_{SSB}))$
DRX cycle>320ms	$\text{Ceil}(10 \times P \times N) \times T_{DRX}$	$\text{Ceil}(5 \times P \times N) \times T_{DRX}$
NOTE: T_{SSB} is the periodicity of the SSB configured for RLM. T_{DRX} is the DRX cycle length.		

Table 8.1B.2.2-3: Evaluation period $T_{Evaluate_out_SSB,RedCap}$ and $T_{Evaluate_in_SSB,RedCap}$ for FR1 for 1Rx RedCap UE

Configuration	$T_{Evaluate_out_SSB,RedCap}$ (ms)	$T_{Evaluate_in_SSB,RedCap}$ (ms)
no DRX	$\text{Max}(400, \text{Ceil}(20 \times P) \times T_{SSB})$	$\text{Max}(100, \text{Ceil}(5 \times P) \times T_{SSB})$
DRX cycle≤320ms	$\text{Max}(400, \text{Ceil}(30 \times P) \times \text{Max}(T_{DRX}, T_{SSB}))$	$\text{Max}(100, \text{Ceil}(7.5 \times P) \times \text{Max}(T_{DRX}, T_{SSB}))$
DRX cycle>320ms	$\text{Ceil}(20 \times P) \times T_{DRX}$	$\text{Ceil}(5 \times P) \times T_{DRX}$
NOTE: T_{SSB} is the periodicity of the SSB configured for RLM. T_{DRX} is the DRX cycle length.		

8.1B.2.3 Measurement restrictions for SSB based RLM

The UE is required to be capable of measuring SSB for RLM without measurement gaps. The UE is required to perform the SSB measurements with measurement restrictions as described in the following scenarios.

For FR1, when the SSB for RLM is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for RLM without any restriction;
- If SSB and CSI-RS have different SCS,

- If UE supports *simultaneousRxDataSSB-DiffNumerology*, UE shall be able to measure the SSB for RLM without any restriction;

- If UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both SSB for RLM and CSI-RS. Longer measurement period for SSB based RLM is expected, and no requirements are defined.

For FR2, when the SSB for RLM measurement is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement, UE is required to measure one of but not both SSB for RLM and CSI-RS. Longer measurement period for SSB based RLM is expected, and no requirements are defined.

8.1B.3 Requirements for CSI-RS based radio link monitoring

8.1B.3.1 Introduction

The requirements in this clause apply for each CSI-RS based RLM-RS resource configured for PCell, provided that the CSI-RS configured for RLM is actually transmitted within UE active DL BWP during the entire evaluation period specified in clause 8.1B.3.2. UE is not expected to perform radio link monitoring measurements on the CSI-RS configured as RLM-RS if the CSI-RS is not in the active TCI state of any CORESET configured in the UE active BWP.

Table 8.1B.3.1-1: PDCCH transmission parameters for out-of-sync evaluation for RedCap UE

Attribute	Value for BLER Configuration #0
DCI format	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	16; for RedCap UE with 1Rx branch. 8; for RedCap UE with 2Rx branches.
Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	4dB
Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	4dB
Bandwidth (PRBs)	48
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed
Note: SCS = 60KHz is not applicable for FR1.	

Table 8.1B.3.1-2: PDCCH transmission parameters for in-sync evaluation for RedCap UE

Attribute	Value for BLER Configuration #0
DCI payload size	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	8; for RedCap UE with 1Rx branch. 4; for RedCap UE with 2Rx branches.
Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	0dB
Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	0dB
Bandwidth (PRBs)	48
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal

Mapping from REG to CCE	Distributed
Note: SCS = 60KHz is not applicable for FR1.	

8.1B.3.2 Minimum requirement

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{Evaluate_out_CSI-RS,RedCap}$ ms period becomes worse than the threshold $Q_{out_CSI-RS,RedCap}$ within $T_{Evaluate_out_CSI-RS,RedCap}$ ms evaluation period.

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{Evaluate_in_CSI-RS,RedCap}$ ms period becomes better than the threshold $Q_{in_CSI-RS,RedCap}$ within $T_{Evaluate_in_CSI-RS,RedCap}$ ms evaluation period.

- $T_{Evaluate_out_CSI-RS,RedCap}$ and $T_{Evaluate_in_CSI-RS,RedCap}$ are defined in Table 8.1B.3.2-1 and Table 8.1B.3.2-3 for FR1 for RedCap 2Rx RedCap and 1Rx RedCap, respectively.

- $T_{Evaluate_out_CSI-RS,RedCap}$ and $T_{Evaluate_in_CSI-RS,RedCap}$ are defined in Table 8.1B.3.2-2 for FR2 with scaling factor N=1 for 2 Rx RedCap.

The requirements of $T_{Evaluate_out_CSI-RS,RedCap}$ and $T_{Evaluate_in_CSI-RS,RedCap}$ apply provided that the CSI-RS for RLM is not in a resource set configured with repetition ON. The requirements do not apply when the CSI-RS resource in the active TCI state of CORESET is the same CSI-RS resource for RLM and the TCI state information of the CSI-RS resource is not given, wherein the TCI state information means QCL Type-D to SSB for L1-RSRP or CSI-RS with repetition ON.

For FR1,

- $P = \frac{1}{1-\frac{T_{CSI-RS}}{MGRP}}$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, and these measurement gaps are overlapping with some but not all occasions of the CSI-RS; and

- P=1 when in the monitored cell there are no measurement gaps overlapping with any occasion of the CSI-RS.

For FR2,

- P=1, when the RLM-RS resource is not overlapped with measurement gap and also not overlapped with SMTC occasion.

- $P = \frac{1}{1-\frac{T_{CSI-RS}}{MGRP}}$, when the RLM-RS resource is partially overlapped with measurement gap and the RLM-RS resource is not overlapped with SMTC occasion ($T_{CSI-RS} < MGRP$)

- $P = \frac{1}{1-\frac{T_{CSI-RS}}{T_{SMTCperiod}}}$, when the RLM-RS resource is not overlapped with measurement gap and the RLM-RS resource is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$).

- $P = P_{sharing\ factor}$, when the RLM-RS resource is not overlapped with measurement gap and RLM-RS resource is fully overlapped with SMTC occasion ($T_{CSI-RS} = T_{SMTCperiod}$).

- $P = \frac{1}{1-\frac{T_{CSI-RS}}{MGRP}-\frac{T_{CSI-RS}}{T_{SMTCperiod}}}$, when the RLM-RS resource is partially overlapped with measurement gap and the RLM-RS resource is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and

  - $T_{SMTCperiod} \neq MGRP$ or

  - $T_{SMTCperiod} = MGRP$ and $T_{CSI-RS} < 0.5 \times T_{SMTCperiod}$

- $P = \frac{P_{sharing\ factor}}{1-\frac{T_{CSI-RS}}{MGRP}}$, when the RLM-RS resource is partially overlapped with measurement gap and the RLM-RS resource is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and $T_{SMTCperiod} = MGRP$ and $T_{CSI-RS} = 0.5 \times T_{SMTCperiod}$

- $P = \frac{1}{1-\frac{T_{CSI-RS}}{T_{SMTCperiod}}}$, when the RLM-RS resource is partially overlapped with measurement gap and the RLM-RS resource is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with measurement gap

- $P = \frac{P_{\text{sharing factor}}}{1-\frac{T_{CSI-RS}}{MGRP}}$, when the RLM-RS resource is partially overlapped with measurement gap and the RLM-RS resource is fully overlapped with SMTC occasion ($T_{CSI-RS} = T_{SMTCperiod}$) and SMTC occasion is partially overlapped with measurement gap ($T_{SMTCperiod} < MGRP$)

- $P_{\text{sharing factor}} = 1$, if the RLM-RS resource outside measurement gap is

  - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and,

  - not overlapped by the RSSI symbols indicated by *ss-RSSI-Measurement* and 1 data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured.

- $P_{\text{sharing factor}} = 3$, otherwise.

where,

If the high layer in TS 38.331 [2] signaling of *smtc2* is present, $T_{SMTCperiod}$ follows *smtc2*; Otherwise $T_{SMTCperiod}$ follows *smtc1*.

If the high layer in TS 38.331 [2] signaling of *smtc2* is present, $T_{SMTCperiod}$ follows *smtc2*; Otherwise $T_{SMTCperiod}$ follows *smtc1*.

Note: The overlap between CSI-RS for RLM and SMTC means that CSI-RS based RLM is within the SMTC window duration.

Longer evaluation period would be expected if the combination of RLM-RS resource, SMTC occasion and measurement gap configurations does not meet previous conditions.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI,E\text{-}UTRAN}$ when the UE is requested to decode an LTE CGI.

The values of $M_{out,RedCap}$ and $M_{in,RedCap}$ used in Table 8.1B.3.2-1 and Table 8.1B.3.2-2 for UE with 2Rx are defined as:

- $M_{out,RedCap} = 20$ and $M_{in,RedCap} = 10$, if the CSI-RS resource configured for RLM is transmitted with higher layer CSI-RS parameter *density* [6, clause 7.4.1] set to 3 and over the bandwidth $\geqslant$ 24 PRBs.

The values of $M_{out,RedCap}$ and $M_{in,RedCap}$ used in Table 8.1B.3.2-3 for RedCap UE with 1Rx are defined as:

- $M_{out,RedCap} = 40$ and $M_{in,RedCap} = 10$, if the CSI-RS resource configured for RLM is transmitted with higher layer CSI-RS parameter *density* [6, clause 7.4.1] set to 3 and over the bandwidth $\geqslant$ 24 PRBs.

Table 8.1B.3.2-1: Evaluation period $T_{Evaluate_out_CSI\text{-}RS,RedCap}$ and $T_{Evaluate_in_CSI\text{-}RS,RedCap}$ for FR1 for 2Rx RedCap UE

Configuration	$T_{Evaluate_out_CSI\text{-}RS,RedCap}$ (ms)	$T_{Evaluate_in_CSI\text{-}RS,RedCap}$ (ms)
no DRX	$\text{Max}(200, \text{Ceil}(M_{out,RedCap} \times P) \times T_{CSI\text{-}RS})$	$\text{Max}(100, \text{Ceil}(M_{in,RedCap} \times P) \times T_{CSI\text{-}RS})$
DRX ≤ 320ms	$\text{Max}(200, \text{Ceil}(1.5 \times M_{out,RedCap} \times P) \times \text{Max}(T_{DRX}, T_{CSI\text{-}RS}))$	$\text{Max}(100, \text{Ceil}(1.5 \times M_{in,RedCap} \times P) \times \text{Max}(T_{DRX}, T_{CSI\text{-}RS}))$
DRX > 320ms	$\text{Ceil}(M_{out,RedCap} \times P) \times T_{DRX}$	$\text{Ceil}(M_{in,RedCap} \times P) \times T_{DRX}$
NOTE: $T_{CSI\text{-}RS}$ is the periodicity of the CSI-RS resource configured for RLM. The requirements in this table apply for $T_{CSI\text{-}RS}$ equal to 5 ms, 10ms, 20 ms or 40 ms. T_{DRX} is the DRX cycle length.		

Table 8.1B.3.2-2: Evaluation period $T_{Evaluate_out_CSI-RS,RedCap}$ and $T_{Evaluate_in_CSI-RS,RedCap}$ for FR2 for 2Rx RedCap UE

Configuration	$T_{Evaluate_out_CSI-RS,RedCap}$ (ms)	$T_{Evaluate_in_CSI-RS,RedCap}$ (ms)
no DRX	Max(200, Ceil($M_{out,RedCap}$×P×N)×T_{CSI-RS})	Max(100, Ceil($M_{in,RedCap}$×P×N) × T_{CSI-RS})
DRX ≤ 320ms	Max(200, Ceil(1.5×$M_{out,RedCap}$×P×N)× Max(T_{DRX}, T_{CSI-RS}))	Max(100, Ceil(1.5×$M_{in,RedCap}$×P×N)× Max(T_{DRX}, T_{CSI-RS}))
DRX > 320ms	Ceil($M_{out,RedCap}$×P×N) × T_{DRX}	Ceil($M_{in,RedCap}$×P×N) × T_{DRX}
NOTE: T_{CSI-RS} is the periodicity of the CSI-RS resource configured for RLM. The requirements in this table apply for T_{CSI-RS} equal to 5 ms, 10 ms, 20 ms or 40 ms. T_{DRX} is the DRX cycle length.		

Table 8.1B.3.2-3: Evaluation period $T_{Evaluate_out_CSI-RS,RedCap}$ and $T_{Evaluate_in_CSI-RS,RedCap}$ for FR1 for 1Rx RedCap UE

Configuration	$T_{Evaluate_out_CSI-RS,RedCap}$ (ms)	$T_{Evaluate_in_CSI-RS,RedCap}$ (ms)
no DRX	Max(400, Ceil($M_{out,RedCap}$×P)×T_{CSI-RS})	Max(100, Ceil($M_{in,RedCap}$×P) × T_{CSI-RS})
DRX ≤ 320ms	Max(400, Ceil(1.5×$M_{out,RedCap}$ ×P)× Max(T_{DRX}, T_{CSI-RS}))	Max(100, Ceil(1.5×$M_{in,RedCap}$×P)× Max(T_{DRX}, T_{CSI-RS}))
DRX > 320ms	Ceil($M_{out,RedCap}$ ×P) × T_{DRX}	Ceil($M_{in,RedCap}$ ×P) × T_{DRX}
NOTE: T_{CSI-RS} is the periodicity of the CSI-RS resource configured for RLM. The requirements in this table apply for T_{CSI-RS} equal to 5 ms, 10ms, 20 ms or 40 ms. T_{DRX} is the DRX cycle length.		

8.1B.3.3 Measurement restrictions for CSI-RS based RLM

The UE is required to be capable of measuring CSI-RS for RLM without measurement gaps. The UE is required to perform the CSI-RS measurements with measurement restrictions as described in the following clauses.

For both FR1 and FR2, when the CSI-RS for RLM is in the same OFDM symbol as SSB for RLM, BFD, CBD or L1-RSRP measurement, UE is not required to receive CSI-RS for RLM in the PRBs that overlap with an SSB.

For FR1, when the SSB for RLM, BFD, CBD, or L1-RSRP measurement is within the active BWP and has same SCS than CSI-RS for RLM, the UE shall be able to perform CSI-RS measurement without restrictions.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has different SCS than CSI-RS for RLM, the UE shall be able to perform CSI-RS measurement with restrictions according to its capabilities:

- If the UE supports *simultaneousRxDataSSB-DiffNumerology* the UE shall be able to perform CSI-RS for RLM measurement without restrictions.

- If the UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both CSI-RS for RLM and SSB. Longer measurement period for CSI-RS based RLM is expected, and no requirements are defined.

For FR1, when the CSI-RS for RLM is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement, UE shall be able to measure the CSI-RS for RLM without any restriction.

For FR2, when the CSI-RS for RLM is in the same OFDM symbol as SSB for RLM, BFD, or L1-RSRP measurement, or in the same symbol as SSB for CBD when beam failure is detected, UE is required to measure one of but not both CSI-RS for RLM and SSB. Longer measurement period for CSI-RS based RLM is expected, and no requirements are defined.

For FR2, when the CSI-RS for RLM measurement is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement,

- In the following cases, UE is required to measure one of but not both CSI-RS for RLM and the other CSI-RS. Longer measurement period for CSI-RS based RLM is expected, and no requirements are defined.

  - The CSI-RS for RLM or the other CSI-RS in a resource set configured with repetition ON, or

  - The other CSI-RS is configured in q1 and beam failure is detected, or

- The two CSI-RS-es are not QCL-ed w.r.t. QCL-TypeD, or the QCL information is not known to UE,

- Otherwise, UE shall be able to measure the CSI-RS for RLM without any restriction.

8.1B.4 Minimum requirement at transitions

When the UE transitions between RLM CD-SSB resource and RLM NCD-SSB resource due to BWP switching during one evaluation period, the UE shall use an evaluation period that is the maximum of the evaluation periods corresponding to the first SSB type and the second SSB type after the BWP switching. Subsequent to this duration, the UE shall use an evaluation period corresponding to the second SSB type for each RLM-RS resource.

The requirements in clause 8.1.4 shall also apply except the scenarios described above.

8.1B.5 Minimum requirement for UE turning off the transmitter

The requirements in clause 8.1.5 shall apply.

8.1B.6 Minimum requirement for L1 indication

When the downlink radio link quality on all the configured RLM-RS resources is worse than $Q_{out,RedCap}$, layer 1 of the UE shall send an out-of-sync indication for the cell to the higher layers. A layer 3 filter shall be applied to the out-of-sync indications as specified in TS 38.331 [2].

When the downlink radio link quality on at least one of the configured RLM-RS resources is better than $Q_{in,RedCap}$, layer 1 of the UE shall send an in-sync indication for the cell to the higher layers. A layer 3 filter shall be applied to the in-sync indications as specified in TS 38.331 [2].

The out-of-sync and in-sync evaluations for the configured RLM-RS resources shall be performed as specified in clause 5 in TS 38.213 [3]. Two successive indications from layer 1 shall be separated by at least $T_{Indication_interval,RedCap}$.

When DRX is not used for RedCap UEs, $T_{Indication_interval,RedCap}$ is max(10ms, $T_{RLM\text{-}RS,M}$), where $T_{RLM,M}$ is the shortest periodicity of all configured RLM-RS resources for the monitored cell, which corresponds to T_{SSB} specified in clause 8.1B.2 if the RLM-RS resource is SSB, or $T_{CSI\text{-}RS}$ specified in clause 8.1B.3 if the RLM-RS resource is CSI-RS.

In case DRX is used for RedCap UEs, $T_{Indication_interval,RedCap}$ is Max(10ms, 1.5 × DRX_cycle_length, 1.5 × $T_{RLM\text{-}RS,M}$)) if DRX cycle_length is less than or equal to 320ms, and $T_{Indication_interval}$ is DRX_cycle_length if DRX cycle_length is greater than 320ms. Upon start of T310 timer as specified in TS 38.331 [2], the UE shall monitor the configured RLM-RS resources for recovery using the evaluation period and layer 1 indication interval corresponding to the no DRX mode until the expiry or stop of T310 timer.

When DRX is not used for HD-FDD RedCap UEs, $T_{Indication_interval,RedCap}$ is max(10ms, $T_{RLM\text{-}RS,M}$), where $T_{RLM,M}$ is the shortest periodicity of all configured RLM-RS resources for the monitored cell, which corresponds to T_{SSB} specified in clause 8.1B.2 if the RLM-RS resource is SSB, or $T_{CSI\text{-}RS}$ specified in clause 8.1B.3 if the RLM-RS resource is CSI-RS, under the following condition

- For each RLM-RS configuration, at least one RLM-RS sample must fall with DL occasion within an indication period.

In case DRX is used for HD-FDD RedCap UEs, $T_{Indication_interval,RedCap}$ is Max(10ms, 1.5 × DRX_cycle_length, 1.5 × $T_{RLM\text{-}RS,M}$)) if DRX cycle_length is less than or equal to 320ms, and $T_{Indication_interval}$ is DRX_cycle_length if DRX cycle_length is greater than 320ms, under the following condition

- For each RLM-RS configuration, at least one RLM-RS sample must fall with DL occasion within an indication period.

8.1B.7 Scheduling availability of UE during radio link monitoring

The requirements in clause 8.1.7 shall apply.

8.1B.7.1 Scheduling availability of UE performing radio link monitoring with a same subcarrier spacing as PDSCH/PDCCH on FR1

The requirements in clause 8.1.7.1 shall apply.

8.1B.7.2 Scheduling availability of UE performing radio link monitoring with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UEs which support *simultaneousRxDataSSB-DiffNumerology* [14] there are no restrictions on scheduling availability due to radio link monitoring based on SSB as RLM-RS. For UEs which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to radio link monitoring based on SSB as RLM -RS.

- The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH or CSI-RS for tracking or CSI-RS for CQI on SSB symbols to be measured for radio link monitoring.

8.1B.7.3 Scheduling availability of UE performing radio link monitoring on FR2

The following scheduling restriction applies due to radio link monitoring on an FR2 serving PCell.

- If the RLM-RS is CSI-RS which is type-D QCLed with active TCI state for PDCCH or PDSCH, and the CSI-RS is not in a CSI-RS resource set with repetition ON,
  - There are no scheduling restrictions due to radio link monitoring based on the CSI-RS.
- Otherwise
  - The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH or CSI-RS for tracking or CSI-RS for CQI on RLM-RS symbols to be measured for radio link monitoring.

For FR2, if following conditions are met,

- UE has been notified about system information update through paging,
- The gap between UE’s reception of PDCCH that UE monitors in the Type2-PDCCH CSS set and that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots,

For the SSB for RLM and CORESET for RMSI scheduling multiplexing patterns 3, UE is expected to receive the PDCCH that UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured for RLM; and

For the SSB for RLM and CORESET for RMSI scheduling multiplexing patterns 2, UE is expected to receive PDSCH that corresponds to the PDCCH that UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured for RLM.

8.1C Radio Link Monitoring for Satellite Access

8.1C.1 Introduction

The requirements in clause 8.1C apply for radio link monitoring on PCell and the UE is configured with only PCell, which is served by satellite access node (SAN).The UE shall monitor the downlink radio link quality based on the reference signal configured as RLM-RS resource(s) in order to detect the downlink radio link quality of the PCell as specified in TS 38.213 [3]. The configured RLM-RS resources can be all SSBs, or all CSI-RSs, or a mix of SSBs and CSI-RSs. UE is not required to perform RLM outside the active DL BWP.

On each RLM-RS resource, the UE shall estimate the downlink radio link quality and compare it to the thresholds Q_{out} and Q_{in} for the purpose of monitoring downlink radio link quality of the cell.

The threshold Q_{out} is defined as the level at which the downlink radio link cannot be reliably received and shall correspond to the out-of-sync block error rate ($BLER_{out}$) as defined in Table 8.1C.1-1. For SSB based radio link monitoring, Q_{out_SSB} is derived based on the hypothetical PDCCH transmission parameters listed in Table 8.1C.2.1-1. For CSI-RS based radio link monitoring, $Q_{out_CSI\text{-}RS}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 8.1C.3.1-1.

The threshold Q_{in} is defined as the level at which the downlink radio link quality can be received with significantly higher reliability than at Q_{out} and shall correspond to the in-sync block error rate ($BLER_{in}$) as defined in Table 8.1C.1-1. For SSB based radio link monitoring, Q_{in_SSB} is derived based on the hypothetical PDCCH transmission parameters listed in Table 8.1C.2.1-2. For CSI-RS based radio link monitoring, $Q_{in_CSI\text{-}RS}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 8.1C.3.1-2.

The out-of-sync block error rate ($BLER_{out}$) and in-sync block error rate ($BLER_{in}$) are determined from the network configuration via parameter *rlmInSyncOutOfSyncThreshold* signalled by higher layers. When UE is not configured with *rlmInSyncOutOfSyncThreshold* from the network, UE determines out-of-sync and in-sync block error rates from Configuration #0 in Table 8.1C.1-1 by default. All requirements in clause 8.1C are applicable for BLER Configuration #0 in Table 8.1C.1-1.

Table 8.1C.1-1: Out-of-sync and in-sync block error rates

Configuration	$BLER_{out}$	$BLER_{in}$
0	10%	2%

UE shall be able to monitor up to N_{RLM} RLM-RS resources of the same or different types in each corresponding carrier frequency range, depending on a maximum number L_{max} of SSBs per half frame according to TS 38.213 [3], where N_{RLM} is specified in Table 8.1C.1-2 according TS 38.213 [3], and meet the requirements as specified in clause 8.1C. UE is not required to meet the requirements in clause 8.1C if RLM-RS is not configured and no TCI state for PDCCH is activated.

Table 8.1C.1-2: Maximum number of RLM-RS resources N_{RLM}

Carrier frequency range of PCell	L_{max}	Maximum number of RLM-RS resources, N_{RLM}
FR1, ≤ 3 GHz[Note]	4	2
FR1, > 3 GHz[Note]	8	4
NOTE: For unpaired spectrum operation with Case C - 30 kHz SCS, 3GHz is replaced by 1.88GHz, as specified in clause 4.1 in TS 38.213 [3].		

8.1C.2 Requirements for SSB based radio link monitoring

8.1C.2.1 Introduction

The requirements in this clause apply for each SSB based RLM-RS resource configured for PCell, provided that the SSB configured for RLM is actually transmitted within UE active DL BWP during the entire evaluation period specified in clause 8.1C.2.2.

Table 8.1C.2.1-1: PDCCH transmission parameters for out-of-sync evaluation

Attribute	Value for BLER Configuration #0
DCI format	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	8
Ratio of hypothetical PDCCH RE energy to average SSS RE energy	4dB
Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	4dB
Bandwidth (PRBs)	24

Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed

Table 8.1C.2.1-2: PDCCH transmission parameters for in-sync evaluation

Attribute	Value for BLER Configuration #0
DCI payload size	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	4
Ratio of hypothetical PDCCH RE energy to average SSS RE energy	0dB
Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	0dB
Bandwidth (PRBs)	24
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed

8.1C.2.2 Minimum requirement

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{Evaluate_out_SSB}$ [ms] period becomes worse than the threshold Q_{out_SSB} within $T_{Evaluate_out_SSB}$ [ms] evaluation period.

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{Evaluate_in_SSB}$ [ms] period becomes better than the threshold Q_{in_SSB} within $T_{Evaluate_in_SSB}$ [ms] evaluation period.

$T_{Evaluate_out_SSB}$ and $T_{Evaluate_in_SSB}$ are defined in Table 8.1C.2.2-1 for FR1.

P value for an RLM-RS resource to be measured is defined as

- $P_{sharing\ factor} * N_{total} / N_{outside_MG}$ with $N_{available} = 0$
- $N_{total} / N_{available}$ with $N_{available} > 0$

For a window W of duration max($T_{L1,}$ MGRP_max), where MGRP max is the maximum MGRP across all configured per-UE measurement gaps, and starting at the beginning of any RLM-RS resource occasion:

- N_{total} is the total number of RLM-RS resource occasions within the window, including those overlapped with measurement gap occasions or SMTC occasions within the window W, and
- $N_{outside_MG}$ is the number of RLM-RS resource occasions that are not overlapped with any measurement gap occasion within the window W
- $N_{available}$ is
  - the number of RLM-RS resource occasions that are not overlapped with any measurement gap occasion nor any SMTC occasion within the window W, if UE does not support *parallelMeasurementWithoutRestriction* and LEO satellites are measured for intra-frequency measurement, and
  - same as $N_{outside_MG}$, otherwise
- T_{L1} is periodicity of the target RLM-RS

- $P_{sharing\ factor} = 3$.

Longer evaluation period would be expected if the combination of RLM-RS resource, SMTC occasion and measurement gap configurations does not meet previous conditions.

For an FR1 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

Table 8.1C.2.2-1: Evaluation period $T_{Evaluate_out_SSB}$ and $T_{Evaluate_in_SSB}$ for FR1

Configuration	$T_{Evaluate_out_SSB}$ (ms)	$T_{Evaluate_in_SSB}$ (ms)
no DRX	Max(200, Ceil(10 × P) × T_{SSB})	Max(100, Ceil(5 × P) × T_{SSB})
DRX cycle≤320ms	Max(200, Ceil(15 × P) × Max(T_{DRX},T_{SSB}))	Max(100, Ceil(7.5 × P) × Max(T_{DRX},T_{SSB}))
DRX cycle>320ms	Ceil(10 × P) × T_{DRX}	Ceil(5 × P) × T_{DRX}
NOTE: T_{SSB} is the periodicity of the SSB configured for RLM. T_{DRX} is the DRX cycle length.		

8.1C.2.3 Measurement restrictions for SSB based RLM

The UE is required to be capable of measuring SSB for RLM without measurement gaps. The UE is required to perform the SSB measurements with measurement restrictions as described in the following scenarios.

For FR1, when the SSB for RLM is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for RLM without any restriction;
- If SSB and CSI-RS have different SCS,
  - If UE supports *simultaneousRxDataSSB-DiffNumerology*, UE shall be able to measure the SSB for RLM without any restriction;
  - If UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both SSB for RLM and CSI-RS. Longer measurement period for SSB based RLM is expected, and no requirements are defined.

8.1C.3 Requirements for CSI-RS based radio link monitoring

8.1C.3.1 Introduction

The requirements in this clause apply for each CSI-RS based RLM-RS resource configured for PCell, provided that the CSI-RS configured for RLM is actually transmitted within UE active DL BWP during the entire evaluation period specified in clause 8.1C.3.2. UE is not expected to perform radio link monitoring measurements on the CSI-RS configured as RLM-RS if the CSI-RS is not in the active TCI state of any CORESET configured in the UE active BWP.

Table 8.1C.3.1-1: PDCCH transmission parameters for out-of-sync evaluation

Attribute	Value for BLER Configuration #0
DCI format	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	8
Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	4dB
Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	4dB
Bandwidth (PRBs)	48
Sub-carrier spacing (kHz)	SCS of the active DL BWP

DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed

Table 8.1C.3.1-2: PDCCH transmission parameters for in-sync evaluation

Attribute	Value for BLER Configuration #0
DCI payload size	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	4
Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	0dB
Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	0dB
Bandwidth (PRBs)	48
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed

8.1C.3.2 Minimum requirement

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{Evaluate_out_CSI-RS}$ ms period becomes worse than the threshold Q_{out_CSI-RS} within $T_{Evaluate_out_CSI-RS}$ ms evaluation period.

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{Evaluate_in_CSI-RS}$ ms period becomes better than the threshold Q_{in_CSI-RS} within $T_{Evaluate_in_CSI-RS}$ ms evaluation period.

- $T_{Evaluate_out_CSI-RS}$ and $T_{Evaluate_in_CSI-RS}$ are defined in Table 8.1C.3.2-1 for FR1.

The requirements of $T_{Evaluate_out_CSI-RS}$ and $T_{Evaluate_in_CSI-RS}$ apply provided that the CSI-RS for RLM is not in a resource set configured with repetition ON. The requirements do not apply when the CSI-RS resource in the active TCI state of CORESET is the same CSI-RS resource for RLM and the TCI state information of the CSI-RS resource is not given, wherein the TCI state information means QCL Type-D to SSB for L1-RSRP or CSI-RS with repetition ON.

P value for an RLM-RS resource to be measured is defined as

- $P_{sharing\ factor} * N_{total} / N_{outside_MG}$ with $N_{available} = 0$
- $N_{total} / N_{available}$ with $N_{available} > 0$

For a window W of duration max($T_{L1,}$ MGRP_max), where MGRP max is the maximum MGRP across all configured per-UE measurement gaps, and starting at the beginning of any RLM-RS resource occasion:

- N_{total} is the total number of RLM-RS resource occasions within the window, including those overlapped with measurement gap occasions or SMTC occasions within the window W, and
- $N_{outside_MG}$ is the number of RLM-RS resource occasions that are not overlapped with any measurement gap occasion within the window W
- $N_{available}$ is
  - the number of RLM-RS resource occasions that are not overlapped with any measurement gap occasion nor any SMTC occasion within the window W, if UE does not support *parallelMeasurementWithoutRestriction* and LEO satellites are measured for intra-frequency measurement, and

- same as $N_{outside_MG}$, otherwise

- T_{L1} is periodicity of the target RLM-RS

- $P_{sharing\ factor} = 3$.

Longer evaluation period would be expected if the combination of RLM-RS resource, SMTC occasion and measurement gap configurations does not meet previous conditions.

For an FR1 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

The values of M_{out} and M_{in} used in Table 8.1C.3.2-1 are defined as:

- $M_{out} = 20$ and $M_{in} = 10$, if the CSI-RS resource configured for RLM is transmitted with higher layer CSI-RS parameter *density* [6, clause 7.4.1] set to 3 and over the bandwidth $\geqslant$ 24 PRBs.

Table 8.1C.3.2-1: Evaluation period $T_{Evaluate_out_CSI-RS}$ and $T_{Evaluate_in_CSI-RS}$ for FR1

Configuration	$T_{Evaluate_out_CSI-RS}$ (ms)	$T_{Evaluate_in_CSI-RS}$ (ms)
no DRX	$Max(200, Ceil(M_{out}\times P)\times T_{CSI-RS})$	$Max(100, Ceil(M_{in}\times P) \times T_{CSI-RS})$
DRX ≤ 320ms	$Max(200, Ceil(1.5\times M_{out}\times P)\times Max(T_{DRX}, T_{CSI-RS}))$	$Max(100, Ceil(1.5\times M_{in}\times P)\times Max(T_{DRX}, T_{CSI-RS}))$
DRX > 320ms	$Ceil(M_{out}\times P) \times T_{DRX}$	$Ceil(M_{in}\times P) \times T_{DRX}$
NOTE: T_{CSI-RS} is the periodicity of the CSI-RS resource configured for RLM. The requirements in this table apply for T_{CSI-RS} equal to 5 ms, 10ms, 20 ms or 40 ms. T_{DRX} is the DRX cycle length.		

8.1C.3.3 Measurement restrictions for CSI-RS based RLM

The UE is required to be capable of measuring CSI-RS for RLM without measurement gaps. The UE is required to perform the CSI-RS measurements with measurement restrictions as described in the following clauses.

For FR1, when the CSI-RS for RLM is in the same OFDM symbol as SSB for RLM, BFD, CBD or L1-RSRP measurement, UE is not required to receive CSI-RS for RLM in the PRBs that overlap with an SSB.

For FR1, when the SSB for RLM, BFD, CBD, or L1-RSRP measurement is within the active BWP and has same SCS than CSI-RS for RLM, the UE shall be able to perform CSI-RS measurement without restrictions.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has different SCS than CSI-RS for RLM, the UE shall be able to perform CSI-RS measurement with restrictions according to its capabilities:

- If the UE supports *simultaneousRxDataSSB-DiffNumerology* the UE shall be able to perform CSI-RS for RLM measurement without restrictions.

- If the UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both CSI-RS for RLM and SSB. Longer measurement period for CSI-RS based RLM is expected, and no requirements are defined.

For FR1, when the CSI-RS for RLM is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement, UE shall be able to measure the CSI-RS for RLM without any restriction.

8.1C.4 Minimum requirement at transitions

When the UE transitions between DRX and no DRX or when DRX cycle periodicity changes, for each RLM-RS resource, for a duration of time equal to the evaluation period corresponding to the second mode after the transition occurs, the UE shall use an evaluation period that is no less than the minimum of evaluation period corresponding to the first mode and the second mode. Subsequent to this duration, the UE shall use an evaluation period corresponding to the second mode for each RLM-RS resource. This requirement shall be applied to both out-of-sync evaluation and in-sync evaluation of the monitored cell.

When the UE transitions from a first configuration of RLM resources to a second configuration of RLM resources that is different from the first configuration, for each RLM resource present in the second configuration, for a duration of

time equal to the evaluation period corresponding to the second configuration after the transition occurs, the UE shall use an evaluation period that is no less than the minimum of evaluation periods corresponding to the first configuration and the second configuration. Subsequent to this duration, the UE shall use an evaluation period corresponding to the second configuration for each RLM resource present in the second configuration. This requirement shall be applied to both out-of-sync evaluation and in-sync evaluation of the monitored cell.

When the UE transitions from a first configuration of active TCI state of the CORESET to a second configuration of active TCI state of the CORESET, for each CSI-RS for RLM present in the second configuration, the UE shall use an evaluation period corresponding to the second configuration from the time of transition. This requirement shall be applied to both out-of-sync evaluation and in-sync evaluation of the monitored cell.

8.1C.5 Minimum requirement for UE turning off the transmitter

The transmitter power of the UE in the monitored cell shall be turned off within 40ms after expiry of T310 timer as specified in TS 38.331 [2].

8.1C.6 Minimum requirement for L1 indication

When the downlink radio link quality on all the configured RLM-RS resources is worse than Q_{out}, layer 1 of the UE shall send an out-of-sync indication for the cell to the higher layers. A layer 3 filter shall be applied to the out-of-sync indications as specified in TS 38.331 [2].

When the downlink radio link quality on at least one of the configured RLM-RS resources is better than Q_{in}, layer 1 of the UE shall send an in-sync indication for the cell to the higher layers. A layer 3 filter shall be applied to the in-sync indications as specified in TS 38.331 [2].

The out-of-sync and in-sync evaluations for the configured RLM-RS resources shall be performed as specified in clause 5 in TS 38.213 [3]. Two successive indications from layer 1 shall be separated by at least $T_{Indication_interval}$.

When DRX is not used $T_{Indication_interval}$ is max(10ms, $T_{RLM\text{-}RS,M}$), where $T_{RLM,M}$ is the shortest periodicity of all configured RLM-RS resources for the monitored cell, which corresponds to T_{SSB} specified in clause 8.1C.2 if the RLM-RS resource is SSB, or $T_{CSI\text{-}RS}$ specified in clause 8.1C.3 if the RLM-RS resource is CSI-RS.

In case DRX is used, $T_{Indication_interval}$ is Max(10ms, 1.5 × DRX_cycle_length, 1.5 × $T_{RLM\text{-}RS,M}$)) if DRX cycle_length is less than or equal to 320ms, and $T_{Indication_interval}$ is DRX_cycle_length if DRX cycle_length is greater than 320ms. Upon start of T310 timer as specified in TS 38.331 [2], the UE shall monitor the configured RLM-RS resources for recovery using the evaluation period and layer 1 indication interval corresponding to the no DRX mode until the expiry or stop of T310 timer.

8.1C.7 Scheduling availability of UE during radio link monitoring

When the reference signal to be measured for RLM has different subcarrier spacing than PDSCH/PDCCH or is on frequency range 2, there are restrictions on the scheduling availability as described in the following clauses.

8.1C.7.1 Scheduling availability of UE performing radio link monitoring with a same subcarrier spacing as PDSCH/PDCCH on FR1

There are no scheduling restrictions due to radio link monitoring performed with a same subcarrier spacing as PDSCH/PDCCH on FR1.

8.1C.7.2 Scheduling availability of UE performing radio link monitoring with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UEs which support *simultaneousRxDataSSB-DiffNumerology* [14] there are no restrictions on scheduling availability due to radio link monitoring based on SSB as RLM-RS. For UEs which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to radio link monitoring based on SSB as RLM -RS.

- The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH or CSI-RS for tracking or CSI-RS for CQI on SSB symbols to be measured for radio link monitoring.

8.2 Interruption

8.2.1 EN-DC Interruption

8.2.1.1 Introduction

This clause contains the requirements related to the interruptions on PSCell, and SCell, when

E-UTRA PCell transitions between active and non-active during DRX, or

E-UTRA PCell transitions from non-DRX to DRX, or

E-UTRA SCell in MCG or SCell in SCG is added or released, or

E-UTRA SCell in MCG or SCell(s) in SCG is activated or deactivated, or

measurements on SCC with deactivated SCell in either E-UTRA MCG or NR SCG, or

a supplementary UL carrier or an UL carrier is configured or de-configured, or

UL/DL active BWP is switched on PSCell or SCell in SCG, or

E-UTRA SCell in MCG or SCell(s) in SCG is directly activated and hibernated, or

E-UTRA SCell in MCG is hibernated, or

Multiple SCells in SCG are activated or deactivated, or

SCell dormancy switches, or

CQI/RRM measurement happens during SCell dormancy, or

UE-specific CBW is changed on PSCell or SCell in SCG, or

CGI reading of an NR neighbour cell with autonomous gaps, or

CGI reading of an E-UTRA neighbour cell with autonomous gaps.

NR SRS carrier based switching, or

E-UTRA SRS carrier based switching, or

NR SRS antenna port switching, or

UE dynamic Tx switches between two uplink carriers, or

SCell in SCG is activated based on aperiodic CSI-RS.

The requirements shall apply for E-UTRA-NR DC with an E-UTRA PCell.

This clause contains interruptions where victim cell is PSCell or SCell belonging to SCG. Requirements for interruptions requirements when the victim cell is E-UTRA PCell or E-UTRA SCell belonging to MCG are specified in TS 36.133 [15].

For a UE which does not support per-FR measurement gaps, interruptions to the PSCell or activated SCG SCells may be caused by EUTRA PCell, EUTRA SCells or SCells on any frequency range. For UE which support per-FR gaps, interruptions to the PSCell or activated SCG SCells may be caused by EUTRA PCell, EUTRA SCells or SCells on the same frequency range as the victim cell.

8.2.1.2 Requirements

8.2.1.2.1 Interruptions at transitions between active and non-active during DRX

Interruption on PSCell and the activated SCell if configured due to E-UTRA PCell transitions between active and non-active druing DRX when PSCell or SCell is in non-DRX are allowed with up to 1% probability of missed ACK/NACK when the configured E-UTRA PCell DRX cycle is less than 640 ms, and 0.625% probability of missed ACK/NACK is allowed when the configured E-UTRA PCell DRX cycle is 640 ms or longer. Each interruption shall not exceed X slot as defined in table 8.2.1.2.1-1.

Table 8.2.1.2.1-1: Interruption length X at transition between active and non-active during DRX

μ	NR Slot length (ms)	Interruption length X (slots)	
		Sync	Async
0	1	1	2
1	0.5	1	2
2	0.25	3	
3	0.125	5	

When both E-UTRA PCell and PSCell are in DRX, no interruption is allowed.

8.2.1.2.2 Interruptions at transitions from non-DRX to DRX

Interruption on PSCell and the activated SCell if configured due to E-UTRA PCell transitions from non-DRX to DRX when PSCell or SCell is in non-DRX shall not exceed X slot as defined in table 8.2.1.2.1-1.

When PSCell and the activated SCell are in DRX, no interruption due to E-UTRA PCell transitions from non-DRX to DRX is allowed.

8.2.1.2.3 Interruptions at SCell addition/release

The requirements in this clause shall apply for the UE configured with PSCell.

When one E-UTRA SCell in MCG is added or released:

- the UE is allowed an interruption on any active serving cell in SCG:
  - of up to X1 slot, if the active serving cell is not in the same band as any of the E-UTRA SCells being added or released, or
  - of up to max{Y1 slot + $T_{SMTC_duration}$, 5ms} if the active serving cells are in the same band as any of the E-UTRA SCells being added or released, provided the cell specific reference signals from the active serving cells and the E-UTRA SCells being added or released are available in the same slot, where $T_{SMTC_duration}$ is the longest SMTC duration among all above active serving cells in SCG;

  Where X1 and Y1 are specified in Table 8.2.1.2.3-1.

When one SCell in SCG is added or released:

- the UE is allowed an interruption on any active serving cell in SCG:
  - of up to X1 slot, if the active serving cell and the SCell being added or released are in a FR2 band pair and UE is capable of independent beam management on this FR2 band pair
  - of up to X1 slot, if the active serving cell and the SCell being added or released are in a FR2 band pair and UE is capable of independent beam management on this FR2 band pair

  or

  - of up to Y1 slot + $T_{SMTC_duration}$ if the active serving cells are in the same band as any of the SCells being added or released, provided the cell specific reference signals from the active serving cells and the SCells being added or released are available in the same slot, where, $T_{SMTC_duration}$ is

- the longest SMTC duration among all above active serving cells in SCG and the SCell being added when one SCell is added. If SSB configuration (*absoluteFrequencySSB*) but no SMTC configuration is provided for the SCell being added, the SSB transmission periodicity is assumed to be 5ms and $T_{SMTC\ duration}$ for the SCell being added is x ms, where x = the number of consecutive subframes containing all SSBs in one SSB burst transmitted by the SCell being added. If no SSB configuration (*absoluteFrequencySSB*) nor SMTC configuration is provided for the SCell being added, $T_{SMTC\ duration}$ for the SCell being added is 0 ms;
- the longest SMTC duration among all above active serving cells in SCG when one SCell is released.

Where X1 and Y1 are specified in Table 8.2.1.2.3-2.

Table 8.2.1.2.3-1: Interruption length X1 and Y1 at E-UTRA SCell addition/Release

μ	NR Slot length (ms)	Interruption length X1 (slots)		Interruption length Y1 (slots)	
		Sync	Async	Sync	Async
0	1	1	2	1	2
1	0.5	2	3	2	3
2	0.25	5		4	5
3	0.125	9		N/A	- N/A

Table 8.2.1.2.3-2: Interruption length X1 and Y1 at SCell addition/Release

μ	NR Slot length (ms) of victim cell	Interruption length X1 (slots)		Interruption length Y1 (slots)
0	1	1		1
1	0.5	2		2
2	0.25	Both aggressor cell and victim cell are on FR2	4	4
		Either aggressor cell or victim cell is on FR1	5	
3	0.125	Aggressor cell is on FR2	8	8
		Aggressor cell is on FR1	9	

8.2.1.2.4 Interruptions at SCell activation/deactivation

The requirements in this clause shall apply for the UE configured with PSCell and one SCell.

When one E-UTRA SCell in MCG is activated from deactivated or dormant state, or deactivated from activated or dormant state:

- the UE is allowed an interruption on any active serving cell in SCG:
  - of up to X2 slot, if the active serving cell is not in the same band as any of the E-UTRA SCells being activated or deactivated, or
  - of up to max{Y2 slot + $T_{SMTC_duration}$, 5ms} if the active serving cells are in the same band as any of the E-UTRA SCells being activated or deactivated, provided the cell specific reference signals from the active serving cells and the E-UTRA SCells being activated or deactivated are available in the same slot, where $T_{SMTC_duration}$ is the longest SMTC duration among all above active serving cells in SCG.

  Where X2 and Y2 are specified in Table 8.2.1.2.4-1.

When one SCell in SCG is activated or deactivated:

- an interruption on any serving cell in SCG:
  - of up to X2 slot, if the active serving cell and the SCell being activated or deactivated are in a FR1 band pair or in a FR1+FR2 band pair.

- of up to X2 slot, if the active serving cells and the SCells being activated or deactivated are in a FR2 band pair and UE is capable of independent beam management on this FR2 band pair.

or

- of up to Y2 slot + $T_{SMTC_duration}$ if the active serving cells are in the same band as any of the SCells being activated or deactivated, provided the cell specific reference signals from the active serving cells and the SCells being activated or deactivated are available in the same slot, where, $T_{SMTC_duration}$ is

  - the longest SMTC duration among all above active serving cells in SCG and the SCell being activated when one SCell is activated. If SSB configuration (*absoluteFrequencySSB*) but no SMTC configuration is provided for the SCell being activated, the SSB transmission periodicity is assumed to be 5ms and $T_{SMTC\ duration}$ for the SCell being activated is x ms, where x = the number of consecutive subframes containing all SSBs in one SSB burst transmitted by the SCell being activated. If no SSB configuration (*absoluteFrequencySSB*) nor SMTC configuration is provided for the SCell being activated, $T_{SMTC\ duration}$ for the SCell being activated is 0ms;

  - the longest SMTC duration among all above active serving cells in SCG when one SCell is deactivated.

  Where X2 and Y2 are specified in Table 8.2.1.2.4-2.

Table 8.2.1.2.4-1: Interruption length X2 and Y2 at E-UTRA SCell activation/deactivation

μ	NR Slot length (ms)	nterruption length X2 (slots)		Interruption length Y2 (slots)	
		Sync	Async	Sync	Async
0	1	1	2	1	2
1	0.5	1	2	1	2
2	0.25	3		2	3
3	0.125	5		N/A	N/A

Table 8.2.1.2.4-2: Interruption length X2 and Y2 at SCell activation/deactivation

μ	NR Slot length (ms) of victim cell	Interruption length X2 (slots)		Interruption length Y2 (slots)
0	1	1		1
1	0.5	1		1
2	0.25	Both aggressor cell and victim cell are on FR2	2	2
		Either aggressor cell or victim cell is on FR1	3	
3	0.125	Aggressor cell is on FR2	4	4
		Aggressor cell is on FR1	5	

8.2.1.2.5 Interruptions during measurements on SCC

8.2.1.2.5.1 Interruptions during measurements on deactivated NR SCC

Interruption on PSCell and other activated NR SCell(s) during measurement on the deactivated NR SCC shall meet requirements in clause 8.2.2.2.3, where the term PCell in clause 8.2.2.2.3 shall be deemed to be replaced with PSCell.

8.2.1.2.5.2 Interruptions during measurements on deactivated E-UTRAN SCC

When one E-UTRA SCell in MCG is deactivated, the UE is allowed due to measurements on the E-UTRA SCC with the deactivated E-UTRA SCell:

- an interruption on PSCell or any activated SCell with up to 0.5% probability of missed ACK/NACK when any of the configured *measCycleSCell* [15] for the deactivated E-UTRA SCells is 640 ms or longer.

- an interruption on PSCell or any activated SCell with up to 0.5% probability of missed ACK/NACK regardless of the configured *measCycleSCell* [15] for the deactivated E-UTRA SCells if indicated by the network using IE *allowInterruptions* [15].

Each interruption shall not exceed

- X3 slot, if the PSCell or activated SCell is not in the same band as the E-UTRA deactivated SCC being measured, or

- Y3 slot + SMTC duration, if the PSCell or activated SCell is in the same band as the E-UTRA deactivated SCC being measured, provided the cell specific reference signals from the PSCell or activated SCell and the E-UTRA deactivated SCC being measured are available in the same slot.

Table 8.2.1.2.5.2-1: Interruption length X3 and Y3 at measurements on deactivated E-UTRA SCC

μ	NR Slot length (ms)	Interruption length X3 (slots)		Interruption length Y3 (slots)	
		Sync	Async	Sync	Async
0	1	1	2	1	2
1	0.5	1	2	1	2
2	0.25	3		2	3
3	0.125	5		N/A	N/A

8.2.1.2.5.3 Interruptions during CQI measurements on dormant E-UTRAN SCell

When one E-UTRA SCell in MCG is dormant, the UE is allowed due to CQI measurements on the dormant E-UTRA SCell:

- an interruption on PSCell or any activated SCell with up to 0.5% probability of missed ACK/NACK.

Each interruption shall not exceed

- X3 slot, if the PSCell or activated SCell is not in the same band as the E-UTRA dormant SCell being measured, or

- Y3 slot + SMTC duration, if the PSCell or activated SCell is in the same band as the E-UTRA dormant SCell being measured, provided the cell specific reference signals from the PSCell or activated SCell and the E-UTRA dormant SCell being measured are available in the same slot.

Where X3 and Y3 are defined in Table 8.2.1.2.5.2-1.

8.2.1.2.5.4 Interruptions during RRM measurements on dormant E-UTRAN SCC

When one E-UTRA SCell in MCG is dormant, the UE is allowed due to RRM measurements on the E-UTRA SCC with the dormant E-UTRA SCell:

- an interruption on PSCell or any activated SCell with up to 0.5% probability of missed ACK/NACK.

Each interruption shall not exceed

- X3 slot, if the PSCell or activated SCell is not in the same band as the E-UTRA dormant SCC being measured, or

- Y3 slot + SMTC duration, if the PSCell or activated SCell is in the same band as the E-UTRA dormant SCC being measured, provided the cell specific reference signals from the PSCell or activated SCell and the E-UTRA dormant SCC being measured are available in the same slot.

Where X3 and Y3 are defined in Table 8.2.1.2.5.2-1.

8.2.1.2.6 Interruptions at UL carrier RRC reconfiguration

The requirements in this clause shall apply when a supplementary UL carrier or an UL carrier is configured or de-configured in NR non-standalone operation as defined in TS 38.331 [2].

When an UL carrier or supplementary UL carrier is configured or de-configured, an interruption of up to X4 slot, is allowed during the RRC reconfiguration procedure [2] on E-UTRA PCell, all activated E-UTRA SCells, PSCell and all activated SCells within the same FR as the reconfigured uplink carrier. The interruption is for both uplink and downlink of E-UTRA PCell, all activated E-UTRA SCells, PSCell and all activated SCells within the same FR as the configured or de-configured UL.

Table 8.2.1.2.6-1: Interruption length X4 at UL carrier RRC reconfiguration

μ	NR Slot length (ms)	Interruption length X4 (slots)	
		Sync	Async
0	1	1	2
1	0.5	2	3
2	0.25	5	
3	0.125	9	

8.2.1.2.7 Interruptions due to Active BWP switching Requirement

The requirements for DCI-based BWP switch, timer-based BWP switch or UL BWP switch triggered by consistent uplink CCA failures in this clause apply to the case that the BWP switch is performed on a single CC or multiple CCs.

When either of the DCI-based, timer-based or RRC-based downlink BWP switch and/or uplink BWP switch occur on multiple CCs simultaneously or over partially overlapping period, the interruption requirements described in this clause apply for each BWP switch.

When UE receives a DCI indicating UE to switch its active BWP involving changes in any of the parameters listed in Table 8.2.1.2.7-2, the UE is allowed to cause interruption of up to X slot to other active serving cells if the UE is not capable of per-FR gap, or if the BWP switching involves SCS changing. When the BWP switch imposes changes in any of the parameters listed in Table 8.2.1.2.7-2 and the UE is capable of per-FR gap, the UE is allowed to cause interruption of up to X slot to other active serving cells in the same frequency range wherein the UE is performing BWP switching. X is defined in Table 8.2.1.2.7-1. The starting time of interruption is only allowed within the BWP switching delay $T_{BWPswitchDelay}$ as defined in clause 8.6.2 when BWP switch occurs on a single CC. The starting time of interruption caused by each BWP switch is only allowed within the BWP switch delay $T_{MultipleBWPswitchDelay}$ +Y as defined in clause 8.6.2A.1 when BWP switch occurs on multiple CCs. Interruptions are not allowed during BWP switch involving any other parameter change.

When a BWP timer *bwp-InactivityTimer* defined in TS 38.331 [2] expires, UE is allowed to cause interruption of up to X slot to other active serving cells due to switching its active BWP involving changes in any of the parameters listed in Table 8.2.1.2.7-2 if the UE is not capable of per-FR gap, or if the BWP switching involves SCS changing. When the BWP switch imposes changes in any of the parameters listed in Table 8.2.1.2.7-2 and the UE is capable of per-FR gap, the UE is allowed to cause interruption of up to X slot to other active serving cells in the same frequency range wherein the UE is performing BWP switching. X is defined in Table 8.2.1.2.7-1. The starting time of interruption is only allowed within the BWP switching delay $T_{BWPswitchDelay}$ as defined in clause 8.6.2 when BWP switch occurs on a single CC. The starting time of interruption caused by each BWP switch is only allowed within the BWP switch delay $T_{MultipleBWPswitchDelay}$ as defined in clause 8.6.2B.1 when BWP switch occurs on multiple CCs simultaneously or $T_{MultipleBWPswitchDelayTotal}$ as defined in clause 8.6.2B.2 when BWP switch occurs on multiple CCs over partially overlapping time period. Interruptions are not allowed during BWP switch involving any other parameter change.

When UE receives an RRC reconfiguration that only requests UE to switch its active BWP on one single CC, the UE is allowed to cause interruption of up to X slot to other active serving cells due to switching its active BWP involving changes in any of the parameters listed in Table 8.2.1.2.7-2 if the UE is not capable of per-FR gap, or if the BWP switching involves SCS changing. When the BWP switch imposes changes in any of the parameters listed in Table 8.2.1.2.7-2 and the UE is capable of per-FR gap, the UE is allowed to cause interruption of up to X slot to other active serving cells in the same frequency range wherein the UE is performing BWP switching. X is defined in Table 8.2.1.2.7-1. The interruption is only allowed within the delay $T_{RRCprocessingDelay}$ + $T_{BWPswitchDelayRRC}$ defined in clause 8.6.3 when BWP switch occurs on a single CC. The interruption is only allowed within the delay $T_{RRCprocessingDelay}$ + $T_{BWPswitchDelayRRC}$ + D_{RRC}*(N-1) as defined in clause 8.6.3A when BWP switch occurs on multiple CCs.

When UL BWP switch is triggered by consistent uplink CCA failures [7], the UE is allowed to cause interruption of up to X slot to other active serving cells due to switching its active UL BWP involving changes in any of the parameters listed in Table 8.2.1.2.7-2 if the UE is not capable of per-FR gap, or if the UL BWP switching involves SCS changing. When the UL BWP switch imposes changes in any of the parameters listed in Table 8.2.1.2.7-2 and the UE is capable of per-FR gap, the UE is allowed to cause interruption of up to X slot to other active serving cells in the same frequency range wherein the UE is performing UL BWP switching. X is defined in Table 8.2.1.2.7-1. The starting time of interruption is only allowed within the UL BWP switching delay $T_{BWPswitchDelay}$ as defined in clause 8.6.2. Interruptions are not allowed during UL BWP switch involving other parameter change.

Table 8.2.1.2.7-1: interruption length X

μ	NR Slot length (ms)	Interruption length X (slots)
0	1	1
1	0.5	1
2	0.25	3
3	0.125	5
Note1: void		

Table 8.2.1.2.7-2: Parameters which cause interruption other than SCS

Parameters	Comment
locationAndBandwidth	From TS 38.331 [2]
nrofSRS-Ports	
maxMIMO-Layers-r16	

8.2.1.2.8 Interruptions at direct SCell activation and hibernation

8.2.1.2.8.1 Interruptions during direct SCell activation and hibernation of E-UTRA SCell

When one E-UTRA SCell in MCG is directly activated and hibernated:

- the UE is allowed an interruption on any active serving cell in SCG:
  - of up to X1 slots, if the active serving cell is not in the same band as any of the E-UTRA SCells being directly activated or hibernated, or
  - of up to max{Y1 slots + $T_{SMTC_duration}$, 5ms} if the active serving cells are in the same band as any of the E-UTRA SCells being directly activated or hibernated, provided the cell specific reference signals from the active serving cells and the E-UTRA SCells being directly activated or hibernated are available in the same slot, where $T_{SMTC_duration}$ is the longest SMTC duration among all above active serving cells in MCG Where X1 and Y1 are specified in Table 8.2.1.2.3-1.

8.2.1.2.8.2 Interruptions during direct SCell activation

When one or multiple SCell(s) in SCG are directly activated at SCell addition:

- the UE is allowed an interruption on any active serving cell in SCG:
  - of up to X1 slot, if the active serving cell is not in the same band as the SCell being directly activated, or
  - of up to max{Y1 slot + $T_{SMTC_duration}$, 5ms} if the active serving cells are in the same band as the SCell being directly activated, provided the cell specific reference signals from the active serving cells and the SCell being directly activated are available in the same slot, where $T_{SMTC_duration}$ is the longest SMTC duration among all above active serving cells in SCG.

  Where X1 and Y1 are specified in Table 8.2.1.2.3-2.

8.2.1.2.9 Interruptions at SCell hibernation

When one E-UTRA SCell in MCG is hibernated:

- the UE is allowed an interruption on any active serving cell in SCG:
  - of up to X2 slots, if the active serving cell is not in the same band as any of the E-UTRA SCells being hibernated, or
  - of up to max{Y2 slots + $T_{SMTC_duration}$, 5ms} if the active serving cells are in the same band as any of the E-UTRA SCells being hibernated, provided the cell specific reference signals from the active serving cells and the E-UTRA SCells being hibernated are available in the same slot, where $T_{SMTC_duration}$ is the longest SMTC duration among all above active serving cells in MCG.

  Where X2 and Y2 are specified in Table 8.2.1.2.4-1.

8.2.1.2.10 Interruptions at SCell activation/deactivation with multiple downlink SCells

The requirements in this clause shall apply for the UE configured with PSCell and up to 6 downlink SCell(s).

When multiple SCells in SCG are activated or deactivated by one single MAC CE command:

- an interruption on any serving cell in SCG is specified as in clause 8.2.1.2.4.

8.2.1.2.11 Interruptions due to UE-specific CBW change

When UE receives an RRC reconfiguration that changes *offsetToCarrier* or *carrierBandwidth*, the UE is allowed to cause interruption of up to X slot to other active serving cells due to switching its CBW. X is defined in Table 8.2.1.2.11-1. The interruption is only allowed within the delay $T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}$ defined in clause 8.7.

Table 8.2.1.2.11-1: interruption length X

μ	NR Slot length (ms)	Interruption length X (slots)
0	1	1
1	0.5	1
2	0.25	3
3	0.125	5

8.2.1.2.12 Interruptions at NR SRS carrier based switching

SRS transmission can be configured on a carrier not configured for PUCCH/PUSCH transmission. When a UE needs to transmit periodic, semi-persistent or aperiodic SRS on a carrier of a serving cell not configured for PUCCH/PUSCH transmission, the UE can perform carrier based switching to one or more carriers not configured for PUCCH/PUSCH transmission from a carrier with PUCCH/PUSCH transmission or from a carrier not configured for PUCCH/PUSCH transmission prior to transmitting SRS, provided that:

- switching is from a configured carrier to an active UL BWP of another activated carrier;
- the carrier of SCells not configured for PUCCH/PUSCH transmission to which SRS carrier based switching is performed is indicated by DCI SRS request field for aperiodic SRS transmission, or indicated by MAC-CE for semi-persistent SRS transmission, or configured via RRC for periodic SRS transmission;
- the serving cell, from which SRS carrier based switching is performed and whose UL transmission may therefore be interrupted, is indicated by srs-SwitchFromServCellIndex and srs-SwitchFromCarrier in TS38.331 [2];
- the SRS switching is not colliding with any other transmission with higher priority defined in TS 38.214 [26].
- the SRS switching is not colliding with any SSB/CSI-RS based L3 measurements and the measurements for RLM/BFD in SCG.

- for UE, which does not support simultaneous reception and transmission for inter-band TDD CA specified in TS 38.331 [2], and is compliant to the requirements for inter-band CA with uplink in one NR band and without simultaneous Rx/Tx specified in TS 38.101-3 [20], the SRS transmission are not simultaneously scheduled with DL SSB/CSI-RS for L3 or L1 measurements transmission on other carriers.

The UE shall not perform SRS carrier based switching if the above conditions cannot be met.

When SRS carrier based switching is performed between carriers, the UE is allowed interruptions on any active serving cell in SCG if UE is not capable of Per-FR gap, or on active serving cell(s) in SCG in FR1 if UE is capable of Per-FR gap, during the switching to the carrier of a serving cell in FR1 not configured for PUCCH/PUSCH transmission,

- with up to X1 slot as specified in Table 8.2.1.2.12-1.

When SRS carrier based switching is performed between carriers, the UE is allowed interruptions on any active serving cell in SCG if UE is not capable of Per-FR gap, or on active serving cell(s) in SCG in FR2 if UE is capable of Per-FR gap, during the switching to the carrier of a serving cell in FR2 not configured for PUCCH/PUSCH transmission,

- with up to X2 slot as specified in Table 8.2.1.2.12-2.

When SRS carrier based switching is performed between carriers, the UE is allowed interruptions on any active serving cell in SCG if UE is not capable of Per-FR gap, or on active serving cell(s) in SCG in FR1 if UE is capable of Per-FR gap, during the switching from the carrier of a serving cell in FR1 not configured for PUCCH/PUSCH transmission,

- with up to X1 slot as specified in Table 8.2.1.2.12-1.

When SRS carrier based switching is performed between carriers, the UE is allowed interruptions on any active serving cell in SCG if UE is not capable of Per-FR gap, or on active serving cell(s) in SCG in FR2 if UE is capable of Per-FR gap, during the switching from the carrier of a serving cell in FR2 not configured for PUCCH/PUSCH transmission,

- with up to X2 slot as specified in Table 8.2.1.2.12-2.

Table 8.2.1.2.12-1: Interruption length X1 (slot)

μ	NR Slot length (ms) of victim cell	SRS carrier switching time (us)[Note 1]	Interruption length X1 (slots)	
			Sub carrier spacing for agressor cell (kHz)	
			15	30
0	1	≤ 200	2	2
		300, 500	2	2
		900	3	3
1	0.5	≤ 200	3	2
		300, 500	3	3
		900	4	4
2	0.25	≤ 200	4	3
		300, 500	5	4
		900	7	6
3	0.125	≤ 200	7	5
		300, 500	9	7
		900	12	10
Note1: NR SRS carrier switching time is UE capability indicated by higher layer parameter *SRS-SwitchingTimeNR*.				

Table 8.2.1.2.12-2: Interruption length X2 (slot)

μ	NR Slot length (ms) of victim cell	SRS carrier switching time (us) [Note]	Interruption length X2 (slots)	
			Sub carrier spacing for agressor cell (kHz)	
			60	120
0	1	$\leq$ 200	2	2
1	0.5	$\leq$ 200	2	2
2	0.25	$\leq$ 200	3	3
3	0.125	$\leq$ 200	4	4
Note1: NR SRS carrier switching time is UE capability indicated by higher layer parameter *SRS-SwitchingTimeNR*.				

For intra-band SRS carrier switching in FR1 or FR2, interruptions in Table 8.2.1.2.12-1 and in Table 8.2.1.2.12-2 based on SRS carrier switching time ≤ 200us shall apply. For inter-band SRS carrier switching in FR1, interruptions in Table 8.2.1.2.12-1 and in Table 8.2.1.2.12-2 shall apply.

8.2.1.2.13 Interruptions at E-UTRA SRS carrier based switching

A PUSCH-less carrier of E-UTRA SCell is a TDD carrier without PUCCH/PUSCH configured. When a UE needs to transmit periodic or aperiodic SRS [23] and/or non-contention based PRACH on a PUSCH-less carrier of E-UTRA SCell, the UE can perform carrier based switching to one or more PUSCH-less carrier of E-UTRA SCells from a E-UTRA carrier with PUSCH or from another PUSCH-less E-UTRA carrier of SCell prior to transmitting SRS and/or PRACH, provided that:

- switching is from a configured E-UTRA carrier to another activated TDD E-UTRA carrier;
- the PUSCH-less carrier of E-UTRA SCells to which SRS carrier based switching is performed is indicated by DCI SRS request field for aperiodic SRS transmission or configured via RRC [15] for periodic SRS transmission;
- the E-UTRA serving cell, from which SRS carrier based switching is performed and whose UL transmission may therefore be interrupted, is indicated by srs-SwitchFromServCellIndex [15];
- the SRS switching is not colliding with any other transmission with higher priority defined in TS36.213 [26];
- the SRS switching is not colliding with PDCCH in subframe 0 and 5 as specified in TS36.213 [26];
- for UE, which does not support simultaneous reception and transmission for inter-band TDD CA specified in TS 36.331 [2], and is compliant to the requirements for inter-band CA with uplink in one E-UTRA band and without simultaneous Rx/Tx specified in TS 36.101 [25], the SRS or RACH transmission are not simultaneously scheduled with DL subframe #0 or DL subframe #5 on other E-UTRA carriers.

The UE shall not perform SRS carrier based switching if the above conditions cannot be met.

When SRS carrier based switching is performed between E-UTRA carriers, the UE is allowed interruptions on any active serving cell in SCG if UE is not capable of Per-FR gap, or on active serving cell(s) in SCG in FR1 if UE is capable of Per-FR gap, during the switching to the PUSCH-less carrier of a serving cell,

- with up to X3 slot as specified in Table 8.2.1.2.13-1.

When SRS carrier based switching is performed between E-UTRA carriers, the UE is allowed interruptions on any active serving cell in SCG if UE is not capable of Per-FR gap, or on active serving cell(s) in SCG in FR1 if UE is capable of Per-FR gap, during the switching from the PUSCH-less carrier of a serving cell,

- with up to X3 slot as specified in Table 8.2.1.2.13-1

Table 8.2.1.2.13-1: Interruption length X3 (slot)

μ	NR Slot length (ms)	Interruption length X3 (slots)
0	1	2
1	0.5	3
2	0.25	5
3	0.125	9

8.2.1.2.14 DL Interruptions at switching between two uplink carriers

The DL interruption requirements at dynamic switching between two uplink carriers specified in this clause are applicable for an uplink band pair of an inter-band EN-DC configuration when the capability *uplinkTxSwitchingPeriod* is present, and is only applicable for uplink switching mechanism specified in clause 6.1.6 of TS 38.214 [26], where E-UTRA UL carrier is capable of one transmit antenna connector and NR UL carrier is capable of two transmit antenna connectors, and the two uplink carriers are in different bands with different carrier frequencies.

When dynamic switching between two uplink carriers is conducted, UE is allowed to cause DL interruption of X OFDM symbols in NR downlink carrier(s) as indicated by *uplinkTxSwitching-DL-Interruption* [2]. The DL interruption starts from the first OFDM symbol which fully or partially overlaps with the UL switching period located in NR carrier. The DL interruption lengths of X for NR carrier(s) are defined in Table 8.2.1.2.14-1.

No DL interruption is allowed in the NR downlink carrier(s) which is not indicated by *uplinkTxSwitching-DL-Interruption*. No DL interruption is allowed for some inter-band EN-DC configurations as specified in clause 5.5B.4 of TS 38.101-3 [20].

Table 8.2.1.2.14-1: DL interruption length on NR carrier(s) in the unit of OFDM symbols (X) for switching between two uplink carriers

μ	NR Slot length (ms)	Uplink Tx switching period Note1	
		35us	140us
0	1	2	3
1	0.5	3	6
2	0.25	4	10
Note 1: Uplink Tx switching period depends on UE capability *uplinkTxSwitchingPeriod.*			

8.2.1.2.15 Interruptions due to SCell dormancy

8.2.1.2.15.1 Interruptions due to SCell dormancy switch

When one SCell in SCG is switched from dormancy to non-dormancy or from non-dormancy to dormancy [7] when UE is in DRX active time,

- the UE is allowed an interruption on active serving cell in SCG as defined in clause 8.2.1.2.7, except that the interruption is allowed regardless of which parameters change between the dormant BWP and the non-dormant BWP
- The starting time of interruption shall be within the dormancy switching delay as defined in clause 8.6.2.

When multiple SCells in SCG are switched from dormancy to non-dormancy or vice versa when the UE is in DRX active time, the interruption requirement described above applies for each BWP switch.

8.2.1.2.15.2 Interruptions due to CQI measurements during SCell dormancy

When one or more SCells are in dormancy, the UE is for the purpose of CQI measurements on the dormant SCell(s) allowed to cause interruptions to non-dormant serving cell(s).

The rate of ACK/NACK feedback loss on any non-dormant serving cell resulting from CQI measurements on dormant SCells shall not exceed 0.5%.

8.2.1.2.15.3 Interruptions due to RRM measurements during SCell dormancy

When one or more SCells are in dormancy, the UE is for the purpose of RRM measurements on the dormant SCell(s) allowed to cause interruptions to non-dormant serving cell(s).

The rate of ACK/NACK feedback loss on any non-dormant serving cell resulting from RRM measurements on dormant SCells shall not exceed 1.0%.

8.2.1.2.16 Interruptions when identifying CGI of an NR cell with autonomous gaps

When a UE is identifying CGI of an NR cell with autonomous gaps, the UE is allowed interruptions on PSCell or any activated SCell:

- with up to K1 interruptions with interrupted slots up to interruption length X1 specified in Table 8.2.1.2.16-1 for each interruption during MIB decoding time period T_{MIB} (ms) specified in clause 9.11.

- with up to L1 interruptions with interrupted slots up to interruption length Y1 specified in Table 8.2.1.2.16-1 for each interruption during SIB1 decoding time period T_{SIB1} (ms) specified in clause 9.11 for SSB and CORESET for RMSI scheduling multiplexing patterns 1.

- with up to L2 interruptions with interrupted slots up to interruption length Y2 specified in Table 8.2.1.2.16-1 for each interruption during SIB1 decoding time period T_{SIB1} (ms) specified in clause 9.11 for SSB and CORESET for RMSI scheduling multiplexing patterns 2 and 3.

Where:

- K1 = 6 for the target cell carrier frequency on FR1 and K1 = 25 for the target cell carrier frequency on FR2, and

- L1 = T_{SIB1}/20, and

- L2 = T_{SIB1}/T_{SMTC}, where T_{SMTC} is the periodicity of the SMTC occasion configured for the target cell carrier.

Table 8.2.1.2.16-1: Interruption length X1, Y1 and Y2 during measurements with autonomous gaps

μ	NR Slot length (ms) of victim cell	Interruption length X1 (slots)	Interruption length Y1 (slots)	Interruption length Y2 (slots)
0	1	6	7	6
1	0.5	12	13	10
2	0.25	24	25	19
3	0.125	48	49	37

8.2.1.2.17 Interruptions when identifying CGI of an E-UTRA cell with autonomous gaps

When a UE is identifying CGI of an E-UTRA FDD cell or E-UTRA TDD cell with autonomous gaps, within time period

- $T_{identify_CGI,\ intra}$ specified in clause 8.1.2.2.3, or clause 8.1.2.2.4 in TS 36.133 [15], or

- $T_{identify_CGI,\ inter}$ specified in clause 8.1.2.3.5, or clause 8.1.2.3.6, or clause 8.1.2.3.7, or clause 8.1.2.3.6 in TS 36.133 [15], or

- $T_{identify_CGI,\ E\text{-}UTRA}$ specified in clause 9.4.7.1

the UE shall be able to transmit at least the number of ACK/NACKs specified in Table 8.2.1.2.17-1 on PSCell or any activated SCell in the frequency range where autonomous gaps are used, provided that:

- there is continuous DL data allocation,

- no DRX cycle is used,

- no measurement gaps are configured,

- only one code word is transmitted in each slot,

- 2 slot ACK/NACK feedback is configured,

- 20 ms SMTC period is configured.

Table 8.2.1.2.17-1: Minimum number of ACK/NACKs transmitted by the UE

Minimum number of transmitted ACK/NACKs	Configuration of the serving cell in which the transmitted ACK/NACKs are counted	
	Duplex mode configuration	SCS
84	FDD	15 kHz
193	FDD	30 kHz
402	FDD	60 kHz
28	TDD Note 1	15 kHz
81	TDD Note 1	30 kHz
159	TDD Note 1	60 kHz

233	TDD Note 2	60 kHz
491	TDD Note 2	120 kHz
NOTE 1: TDD UL-DL configuration is as specified in Table A.3.3.1-1 of TS 38.101-1 [18]. NOTE 2: TDD UL-DL configuration is as specified in Table A.3.3.1-1 of TS 38.101-2 [19].		

8.2.1.2.18 Interruptions at NR SRS antenna port switching

The requirements in this clause are applicable to SRS antenna port switching on FR1 and SRS resource(s) is only configured within the last 6 symbols of a slot. For interruption caused by SRS antenna port switching, the victim cell is based on the entry number of the band indicated by *txSwitchImpactToRx* and/or *txSwitchWithAnotherBand* regardless of per-FR MG capability. An UL interruption is allowed on any of the serving cells as indicated in *txSwitchWithAnotherBand*, and a DL interruption is allowed on any of the serving cells as indicated in *txSwitchImpactToRx*.

The UE shall perform SRS antenna port switching only if the below conditions are met.

- the SRS switching is not colliding with any other UL transmission with higher priority defined in TS 38.214 [26] if the serving cell on which the higher priority transmission is performed is a victim cell based on *txSwitchWithAnotherBand* or is the same carrier on which SRS is transmitted.

- the SRS switching is not colliding with any NR measurements (i.e. SSB/CSI-RS based L1/L3 measurements) and the measurements for RLM/BFD/CBD if the serving cell on which the NR measurements and the measurements for RLM/BFD/CBD is performed is a victim cell based on *txSwitchImpactToRx* or is the same carrier on which SRS is transmitted.

No requirements are defined for SRS antenna port switching if aperiodic SRS switching is colliding with aperiodic L1-RSRP/L1-SINR measurements and the serving cell on which the aperiodic L1-RSRP/L1-SINR measurement is configured is indicated in *txSwitchImpactToRx* or is the same carrier on which aperiodic SRS is scheduled/configured.

No requirements apply when SRS antenna port switching is colliding with E-UTRA measurement if the carrier on which the E-UTRA measurement is performed is indicated in *txSwitchImpactToRx* or is the same carrier on which SRS is scheduled/configured.When 1 SRS symbol is configured in a slot for SRS antenna switching and the aggressor and victim cells are synchronized, the interruption requirement in Table 8.2.1.2.18-1 applies.

When 1 SRS symbol is configured in a slot for SRS antenna switching and the aggressor and victim cells are asynchronized, the interruption requirement in Table 8.2.1.2.18-2 applies. For the rest of SRS configurations, the interruption requirement in Table 8.2.1.2.18-3 applies.

Table 8.2.1.2.18-1: Interruption length in symbols of victim CC when 1 SRS symbol is configured, and aggressor and victim cells are synchronized

Victim cell SCS(kHz)	Aggressor cell SCS (kHz)		
	15	30	60
15	3	2	2
30	4	3	3
60	8	6	5
120	14	10	8

Table 8.2.1.2.18-2: Interruption length in slots of victim CC when 1 SRS symbol is configured, and aggressor and victim cells are asynchronized

Victim cell SCS(kHz)	Aggressor cell SCS (kHz)		
	15	30	60
15	2	2	2
30	2	2	2
60	2	2	2
120	2	2	2

Table 8.2.1.2.18-3: Interruption length in slots of victim CC for rest of the SRS configurations for synchronized and asynchronized scenarios

Victim cell SCS(kHz)	Aggressor cell SCS (kHz)		
	15	30	60
15	2	2	2
30	2	2	2
60	3	2	2
120	5	3	3

8.2.1.2.19 Interruptions at fast SCell activation

The requirements in this clause shall apply for the UE configured with PSCell and one SCell when aperiodic CSI-RS resources is configured for fast SCell activation.

When one SCell in SCG configured with aperiodic CSI-RS resources is configured for fast SCell activation is activated from deactivated, the UE is allowed:

- an interruption on any serving cell in SCG:
  - of up to X2 slot, if the active serving cell and the SCell being activated are in a FR1 band pair or in a FR1+FR2 band pair.
  - of up to X2 slot, if the active serving cells and the SCells being activated are in a FR2 band pair and UE is capable of independent beam management on this FR2 band pair.

or

  - of up to Y2 slot +$T_{ATRS_duration}$ if the active serving cells are in the same band as any of the SCells being activated, when

- SCell to be activated is known and belongs to FR1, if the measurement period of the SCell being activated is larger than [2400ms], or
  - SCell is unknown and belongs to FR1, and SCell is contiguous to an active serving cell in the same band

or

  - of up to Y2 slot if the active serving cells are in the same band as any of the SCells being activated, when
    - SCell to be activated is known and belongs to FR1, if the measurement period of the SCell being activated is equal to or smaller than [2400ms], or
- SCell to be activated belongs to FR2

Where:

  - $T_{ATRS_duration}$ is CSI-RS burst for SCell activation where the CSI-RS burst is defined as four CSI-RS resources in two consecutive slots on the being activated SCell.
  - X2 and Y2 are specified in Table 8.2.1.2.4-2.

8.2.1.2.20 Interruptions due to PUCCH SCell activation/deactivation

When one SCell in SCG configured with PUCCH is activated or deactivated,

The UE is allowed an interruption on active serving cell in SCG as defined in clause 8.2.1.2.4.

- The starting time of interruption shall be within the delay as defined in clause 8.3.12.
- For inter-band CA, if the UE is not capable of *parallelTxPRACH-SRS-PUCCH-PUSCH*, additional interruption is allowed on SRS/PUCCH/PUSCH of active serving cells when colliding with RACH transmission on PUCCH SCell. . Interruption occurs on the symbols containing SRS/PUCCH/PUSCH, which overlap with the duration of the PRACH preamble [3] transmitted on the PUCCH SCell.

8.2.2 SA: Interruptions with Standalone NR Carrier Aggregation

8.2.2.1 Introduction

This clause contains the requirements related to the interruptions on PCell and activated SCell if configured, when

up to 7 SCells are configured, de-configured, activated or deactivated, or

a supplementary UL carrier or an UL carrier is configured or de-configured, or

measurements on SCC with deactivated SCell in NR SCG, or

UL/DL BWP is switched on PCell or SCell, or

CGI reading of an NR neighbour cell with autonomous gaps, or

CGI reading of an E-UTRA neighbour cell with autonomous gaps.

UE-specific CBW is changed on PCell or SCell, or

NR SRS carrier based switching, or

NR SRS antenna port switching, or

UE dynamic Tx switches between two uplink carriers, or

SCell is activated based on aperiodic CSI-RS.

Note: interruptions at SCell addition/release, activation/deactivation and during measurements on SCC may not be required by all UEs.

The interruptions shall not interrupt RRC signalling or ACK/NACKs related to RRC reconfiguration procedure according to TS38.331 [2] for SCell addition/release or MAC control signalling according to TS37.340 [17] for SCell activation/deactivation command.

This clause additionally contains requirements related to interruptions at inter-frequency SFTD between PCell in FR1 and neighbour cell in FR2.

For a UE which does not support per-FR measurement gap, interruptions to the PCell and activated SCell may be caused by SCells on any frequency range. For a UE which supports per-FR gaps, interruptions to PCell and activated SCell may be caused by SCells on the same frequency range as the victim cell.

In addition to standalone NR carrier aggregation when no CCA is configured, the requirements in clause 8.2.2. and all subclauses of 8.2.2 apply when the UE is configured with

-A PCell not using CCA in downlink and one or more SCells using CCA in downlink or

-A PCell and one or more SCells using CCA in downlink

8.2.2.2 Requirements

8.2.2.2.1 Interruptions at SCell addition/release

When any number of SCells between one and 7 is added or released using the same *RRCConnectionReconfiguration* message as defined in TS 38.331 [2], the UE is allowed an interruption on any active serving cell during the RRC reconfiguration procedure as follows:

- an interruption on any active serving cell:
  - of up to X1 slot, if the active serving cell and the SCell being added or released are in a FR1 band pair or in a FR1+FR2 band pair.

- of up to X1 slot, if the active serving cell and the SCell being added or released are in a FR2 band pair and UE is capable of independent beam management on this FR2 band pair.

  Where X1 is specified in Table 8.2.2.2.1-1.

or

- of up to the duration shown in table 8.2.2.2.1-2, if the active serving cells are in the same band as any of the SCells being added or released, provided the cell specific reference signals from the active serving cells and the SCells being added or released are available in the same slot.

Table 8.2.2.2.1-1: Interruption length X1 for SCell addition/release for inter-band CA

μ	NR Slot length (ms) of victim cell	Interruption length X1 (slots)	
0	1	1	
1	0.5	2	
2	0.25	Both aggressor cell and victim cell are on FR2	4
		Either aggressor cell or victim cell is on FR1	5
3	0.125	Aggressor cell is on FR2	8
		Aggressor cell is on FR1	9
5	0.03125	Aggressor cell is on FR1	33
6	0.015625	Aggressor cell is on FR1	65

Table 8.2.2.2.1-2: Interruption duration for SCell addition/release for intra-band CA

μ	NR Slot length (ms)	Interruption length (slots)
0	1	1 + $T_{SMTC_duration} * N_{slot}^{subframe,\mu}$
1	0.5	2 + $T_{SMTC_duration} * N_{slot}^{subframe,\mu}$
2	0.25	4 + $T_{SMTC_duration} * N_{slot}^{subframe,\mu}$
3	0.125	8 + $T_{SMTC_duration} * N_{slot}^{subframe,\mu}$
5	0.03125	32+ $T_{SMTC_duration} * N_{slot}^{subframe,\mu}$
6	0.015625	64+ $T_{SMTC_duration} * N_{slot}^{subframe,\mu}$
NOTE 1: $T_{SMTC_duration}$ measured in subframes is - the longest SMTC duration among all above active serving cells and the SCell being added when one SCell is added. If SSB configuration (*absoluteFrequencySSB*) but no SMTC configuration is provided for the SCell being added, the SSB transmission periodicity is assumed to be 5ms and $T_{SMTC\ duration}$ for the SCell being added is x ms, where x = the number of consecutive subframes containing all SSBs in one SSB burst transmitted by the SCell being added. If no SSB configuration (*absoluteFrequencySSB*) nor SMTC configuration is provided for the SCell being added, $T_{SMTC\ duration}$ for the SCell being added is 0ms; - the longest SMTC duration among all active serving cells in the same band when one SCell is released.		
NOTE 2: $N_{slot}^{subframe,\mu}$ is as defined in TS 38.211 [6].		

8.2.2.2.2 Interruptions at SCell activation/deactivation

When an intra-band SCell is activated or deactivated as defined in TS 37.340 [17], the UE is allowed

- an interruption on any active serving cell:
  - of up to X2 slot, if the active serving cell and the SCell being activated or deactivated are in a FR1 band pair or in a FR1+FR2 band pair.
  - of up to X2 slot, if the active serving cell and the SCell being activated or deactivated are in a FR2 band pair and UE is capable of independent beam management on this FR2 band pair.

    Where X2 is specified in Table 8.2.2.2.2-1.

  or

  - of up to the duration shown in table 8.2.2.2.2-2, if the active serving cells are in the same band as any of the SCells being activated or deactivated provided the cell specific reference signals from the active serving cells and the SCells being activated or deactivated are available in the same slot.

Table 8.2.2.2.2-1: Interruption length X2 for SCell activation/deactivation for inter-band CA

μ	NR Slot length (ms) of victim cell	Interruption length X2 (slots)	
0	1		1
1	0.5		1
2	0.25	Both aggressor cell and victim cell are on FR2	2
		Either aggressor cell or victim cell is on FR1	3
3	0.125	Aggressor cell is on FR2	4
		Aggressor cell is on FR1	5
5	0.03125	Aggressor cell is on FR1	17
6	0.015625	Aggressor cell is on FR1	33

Table 8.2.2.2.2-2: Interruption duration for SCell activation/deactivation for intra-band CA

μ	NR Slot length (ms)	Interruption length (slots)
0	1	1 + $T_{SMTC_duration}$ * $N_{slot}^{subframe,\mu}$
1	0.5	1 + $T_{SMTC_duration}$ * $N_{slot}^{subframe,\mu}$
2	0.25	2 + $T_{SMTC_duration}$ * $N_{slot}^{subframe,\mu}$
3	0.125	4 + $T_{SMTC_duration}$ * $N_{slot}^{subframe,\mu}$
5	0.03125	16+ $T_{SMTC_duration}$ * $N_{slot}^{subframe,\mu}$
6	0.015625	32+ $T_{SMTC_duration}$ * $N_{slot}^{subframe,\mu}$
NOTE 1: $T_{SMTC_duration}$ measured in subframes is - the longest SMTC duration among all above active serving cells and the SCell being activated when one SCell is activated. If SSB configuration (*absoluteFrequencySSB*) but no SMTC configuration is provided for the SCell being activated, the SSB transmission periodicity is assumed to be 5ms and $T_{SMTC\ duration}$ for the SCell being activated is x ms, where x = the number of consecutive subframes containing all SSBs in one SSB burst transmitted by the SCell being activated. If no SSB configuration (*absoluteFrequencySSB*) nor SMTC configuration is provided for the SCell being activated, $T_{SMTC\ duration}$ for the SCell being activated is 0ms; - the longest SMTC duration among all active servingNOTE 2: $N_{slot}^{subframe,\mu}$ is as defined in TS 38.211 [6].		

8.2.2.2.3 Interruptions during measurements on deactivated SCC

Interruptions on PCell or activated SCell(s) due to measurements when an SCell is deactivated are allowed with up to 0.5% probability of missed ACK/NACK when the configured *measCycleSCell* [2] is 640 ms or longer.

- If the PCell or activated SCell(s) is not in the same band as the deactivated SCell, the UE is only allowed to cause interruptions on PCell or activated SCell(s) immediately before and immediately after an SMTC. Each interruption shall not exceed requirement in Table 8.2.2.2.2-1.

If the PCell or activated SCell(s) is in the same band as the deactivated SCell, the UE is only allowed to cause an interruption on PCell or activated SCell(s) no earlier than X slots before $T_{SMTC_duration}$ and no later than X slots after $T_{SMTC_duration}$, provided the cell specific reference signals from the active serving cells and the deactivated SCell are available in the same slot, where X and $T_{SMTC_duration}$ are given by Table 8.2.2.2.3-1. The interruption shall not exceed requirements in Table 8.2.2.2.3-1.

The interruption requirements in Table 8.2.2.2.3-1 are not applicable when a UE is configured with NCSG unless the SMTC on the deactivated SCC is fully non-overlapped with NCSG.

Table 8.2.2.2.3-1: Interruption duration for measurement on deactivated SCell for intra-band CA

μ	NR Slot length (ms)	X (slots)	Interruption length (slots)
0	1	1	2 + $T_{SMTC_duration}$ * $N_{slot}^{subframe,\mu}$
1	0.5	1	2 + $T_{SMTC_duration}$ * $N_{slot}^{subframe,\mu}$
2	0.25	2	4 + $T_{SMTC_duration}$ * $N_{slot}^{subframe,\mu}$
3	0.125	4	8 + $T_{SMTC_duration}$ * $N_{slot}^{subframe,\mu}$
5	0.03125	16	32 + $T_{SMTC_duration}$ * $N_{slot}^{subframe,\mu}$
6	0.015625	32	64 + $T_{SMTC_duration}$ * $N_{slot}^{subframe,\mu}$
NOTE 1: $T_{SMTC_duration}$ measured in subframes is the longest SMTC duration among all above active serving cells and the deactivated SCell to be measured; NOTE 2: $N_{slot}^{subframe,\mu}$ is as defined in TS 38.211 [6].			

8.2.2.2.4 Interruptions at UL carrier RRC reconfiguration

The requirements in this clause shall apply when a supplementary UL carrier or an UL carrier is configured or de-configured in NR standalone carrier aggregation as defined in TS 38.331 [2]. Further, the requirements in this clause are applicable to UE capable of independent beam management in FR2 inter-band CA and UE capable of FR2 intra-band CA and FR1.

When an UL carrier or supplementary UL carrier is configured or de-configured, an interruption of up to the duration shown in table 8.2.2.2.4-1, is allowed during the RRC reconfiguration procedure [2] on PCell and all activated SCells within the same FR as the reconfigured uplink carrier. The interruption is for both uplink and downlink of PCell and all the activated SCells within the same FR as the configured or de-configured UL.

Table 8.2.2.2.4-1: Interruption duration for UL carrier RRC reconfiguration

μ	NR Slot length (ms)	Interruption length (slots)
0	1	1
1	0.5	2
2	0.25	4
3	0.125	8
5	0.03125	32
6	0.015625	64

8.2.2.2.5 Interruptions due to Active BWP switching Requirement

The requirements for DCI-based BWP switch, timer-based BWP switch or UL BWP switch triggered by consistent uplink CCA failures in this clause apply to the case that the BWP switch is performed on a single CC or multiple CCs.

When either of the DCI-based, timer-based or RRC-based downlink BWP switch and/or uplink BWP switch occur on multiple CCs simultaneously or over partially overlapping period, the interruption requirements described in this clause apply for each BWP switch. Further, the requirements in this clause are applicable to UE capable of independent beam management in FR2 inter-band CA and UE capable of FR2 intra-band CA and FR1.

When UE receives a DCI indicating UE to switch its active BWP involving changes in any of the parameters listed in Table 8.2.2.2.5-2, the UE is allowed to cause interruption of up to X slot to other active serving cells if the UE is not capable of per-FR gap, or if the BWP switching involves SCS changing. When the BWP switch imposes changes in any of the parameters listed in Table 8.2.2.2.5-2 and the UE is capable of per-FR gap the UE is allowed to cause interruption of up to X slot to other active serving cells in the same frequency range wherein the UE is performing BWP switching. X is defined in Table 8.2.2.2.5-1. The starting time of interruption is only allowed within the BWP switching delay $T_{BWPswitchDelay}$ as defined in clause 8.6.2 when BWP switch occurs on a single CC. The starting time of interruption caused by each BWP switch is only allowed within the BWP switch delay $T_{MultipleBWPswitchDelay}$ +Y as defined in clause 8.6.2A.1 when BWP switch occurs on multiple CCs. Interruptions are not allowed during BWP switch involving any other parameter change.

When a BWP timer *bwp-InactivityTimer* defined in TS 38.331 [2] expires, UE is allowed to cause interruption of up to X slot to other active serving cells due to switching its active BWP involving changes in any of the parameters listed in Table 8.2.2.2.5-2 if the UE is not capable of per-FR gap, or if the BWP switching involves SCS changing. When the BWP switch imposes changes in any of the parameters listed in Table 8.2.2.2.5-2 and the UE is capable of per-FR gap, the UE is allowed to cause interruption of up to X slot to other active serving cells in the same frequency range wherein the UE is performing BWP switching. X is defined in Table 8.2.2.2.5-1. The starting time of interruption is only allowed within the BWP switching delay $T_{BWPswitchDelay}$ as defined in clause 8.6.2 when BWP switch occurs on a single CC. The starting time of interruption caused by each BWP switch is only allowed within the BWP switch delay $T_{MultipleBWPswitchDelay}$ as defined in clause 8.6.2B.1 when BWP switch occurs on multiple CCs simultaneously or $T_{MultipleBWPswitchDelayTotal}$ as defined in clause 8.6.2B.2 when BWP switch occurs on multiple CCs over partially overlapping time period. Interruptions are not allowed during BWP switch involving any other parameter change.

When UE receives an RRC reconfiguration that only requests UE to switch its active BWP on one single CC, the UE is allowed to cause interruption of up to X slot to other active serving cells due to switching its active BWP involving changes in any of the parameters listed in Table 8.2.2.2.5-2 if the UE is not capable of per-FR gap, or if the BWP switching involves SCS changing. When the BWP switch imposes changes in any of the parameters listed in Table 8.2.2.2.5-2 and the UE is capable of per-FR gap, the UE is allowed to cause interruption of up to X slot to other active serving cells in the same frequency range wherein the UE is performing BWP switching. X is defined in Table 8.2.2.2.5-1. The interruption is only allowed within the delay $T_{RRCprocessingDelay}$ + $T_{BWPswitchDelayRRC}$ defined in clause 8.6.3 when BWP switch occurs on a single CC. The interruption is only allowed within the delay $T_{RRCprocessingDelay}$ + $T_{BWPswitchDelayRRC}$ + D_{RRC}*(N-1) as defined in clause 8.6.3A when BWP switch occurs on multiple CCs.

When UL BWP switch is triggered by consistent uplink CCA failures [7], UE is allowed to cause interruption of up to X slot to other active serving cells due to switching its active UL BWP involving changes in any of the parameters listed in Table 8.2.2.2.5-2 if the UE is not capable of per-FR gap, or if the BWP switching involves SCS changing. When the UL BWP switch imposes changes in any of the parameters listed in Table 8.2.2.2.5-2 and the UE is capable of per-FR gap, the UE is allowed to cause interruption of up to X slot to other active serving cells in the same frequency range wherein the UE is performing UL BWP switching. X is defined in Table 8.2.2.2.5-1. The starting time of interruption is only allowed within the UL BWP switching delay $T_{BWPswitchDelay}$ as defined in clause 8.6.2. Interruptions are not allowed during BWP switch involving other parameter change.

Table 8.2.2.2.5-1: Interruption length X

μ	NR Slot length (ms)	Interruption length X (slots)
0	1	1
1	0.5	1
2	0.25	3
3	0.125	5
5	0.03125	17
6	0.015625	33
Note1: void		

Table 8.2.2.2.5-2: Parameters which cause interruption other than SCS

Parameters	Comment
locationAndBandwidth	From TS 38.331 [2]
nrofSRS-Ports	
maxMIMO-Layers-r16	

8.2.2.2.6 Interruptions at inter-frequency SFTD measurement

The requirements in this clause concern interruptions on PCell, as well as on activated SCells in MCG, when the UE is performing SFTD measurements on inter-frequency neighbour cell(s). The following requirements apply when no PSCell is configured.

For a UE with per-FR gap capability:

- for neighbour cell in FR1:
  - the percentage of interrupted slots on uplink and downlink on FR1 serving cells during the SFTD measurement period $T_{measure_SFTD1}$ specified in Clause 9.3.8 shall not exceed the percentages specified in Table 8.2.2.2.6-1. No interruption is allowed on FR2 serving cells.
  - the length of each interruption on FR1 serving cells shall not exceed the number of slots specified in Table 8.2.2.2.6-2.
- for neighbour cell in FR2:
  - the percentage of interrupted slots on uplink and downlink on FR2 serving cells during the SFTD measurement period $T_{measure_SFTD1}$ specified in Clause 9.3.8 shall not exceed the percentages specified in Table 8.2.2.2.6-1. No interruption is allowed on FR1 serving cells.
  - the length of each interruption on FR2 serving cells shall not exceed the number of slots specified in Table 8.2.2.2.6-2.

For a UE with per-UE gap capability:

- for neighbour cell in FR1 or FR2:
  - the percentage of interrupted slots on uplink and downlink on FR1 and FR2 serving cells during the SFTD measurement period $T_{measure_SFTD1}$ specified in Clause 9.3.8 shall not exceed the percentages specified in Table 8.2.2.2.6-1.
  - the length of each interruption on FR1 and FR2 serving cells shall not exceed the number of slots specified in Table 8.2.2.2.6-2.

Table 8.2.2.2.6-1: Requirements on maximum percentage of interrupted slots in serving cell in inter-frequency SFTD

SFTD configuration	Serving cell μ	Neighbour cell SMTC periodicity					
		5ms	10ms	20ms	40ms	80ms	160ms
With RSRP report	0	8.4%	6.3%	8.4%	6.3%	5.3%	4.7%
	1						
	2						
	3						
Without RSRP report	0	11.4%	8.6%	7.9%	6.8%	6.3%	6.0%
	1						
	2						
	3						

Table 8.2.2.2.6-2: Interruption duration for FR1 serving cell in inter-frequency SFTD with neighbour cell in FR1

μ	NR Slot length (ms)	Interruption length (slots)
0	1	1
1	0.5	2
2	0.25	4
3	0.125	8

Table 8.2.2.2.6-3: Void

Table 8.2.2.2.6-4: Void

8.2.2.2.7 Interruptions at SCell activation/deactivation with multiple downlink SCells

The requirements in this clause shall apply for the UE configured with PCell and up to 7 downlink SCell(s).

When multiple SCell is activated or deactivated by one single MAC CE command:

- an interruption on any active serving cell is specified as in clause 8.2.2.2.2:

8.2.2.2.8 Interruptions due to UE-specific CBW change

When UE receives an RRC reconfiguration that changes *offsetToCarrier* or *carrierBandwidth*, the UE is allowed to cause interruption of up to X slot to other active serving cells due to switching its CBW. X is defined in Table 8.2.2.2.8-1. The interruption is only allowed within the delay $T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}$ defined in clause 8.13.

Table 8.2.2.2.8-1: interruption length X

μ	NR Slot length (ms)	Interruption length X (slots)
0	1	1
1	0.5	1
2	0.25	3
3	0.125	5
5	0.03125	17
6	0.015625	33

8.2.2.2.9 Interruptions at NR SRS carrier based switching

SRS transmission can be configured on a carrier not configured for PUCCH/PUSCH transmission. When a UE needs to transmit periodic, semi-persistent or aperiodic SRS on a carrier of a serving cell not configured for PUCCH/PUSCH transmission, the UE can perform carrier based switching to one or more carriers not configured for PUCCH/PUSCH transmission from a carrier with PUCCH/PUSCH transmission or from a carrier not configured for PUCCH/PUSCH transmission prior to transmitting SRS, provided that:

- switching is from a configured carrier to another activated carrier;
- the carrier of SCells not configured for PUCCH/PUSCH transmission to which SRS carrier based switching is performed is indicated by DCI SRS request field for aperiodic SRS transmission, or indicated by MAC-CE for semi-persistent SRS transmission, or configured via RRC for periodic SRS transmission;
- the serving cell, from which SRS carrier based switching is performed and whose UL transmission may therefore be interrupted, is indicated by srs-SwitchFromServCellIndex and srs-SwitchFromCarrier in TS38.331 [2];
- the SRS switching is not colliding with any other transmission with higher priority defined in TS 38.214 [26].
- the SRS switching is not colliding with any SSB/CSI-RS based L3 measurements and the measurements for RLM/BFD.

- for UE, which does not support simultaneous reception and transmission for inter-band TDD CA specified in TS 38.331 [2], and is compliant to the requirements for inter-band CA with uplink in one NR band and without simultaneous Rx/Tx specified in TS 38.101-1 [18] for frequency range 1 and TS 38.101-2 [19] for frequency range 2, the SRS transmission are not simultaneously scheduled with DL SSB/CSI-RS for L3 or L1 measurements transmission on other carriers.

The UE shall not perform SRS carrier based switching if the above conditions cannot be met.

When SRS carrier based switching is performed between carriers, the UE is allowed interruptions on any active serving cell if UE is not capable of Per-FR gap, or on active serving cell(s) in FR1 if UE is capable of Per-FR gap, during the switching to the carrier of a serving cell in FR1 not configured for PUCCH/PUSCH transmission,

- with up to X1 slot as specified in Table 8.2.2.2.9-1.

When SRS carrier based switching is performed between carriers, the UE is allowed interruptions on any active serving cell if UE is not capable of Per-FR gap, or on active serving cell(s) in FR2 if UE is capable of Per-FR gap, during the switching to the carrier of a serving cell in FR2 not configured for PUCCH/PUSCH transmission,

- with up to X2 slot as specified in Table 8.2.2.2.9-2.

When SRS carrier based switching is performed between carriers, the UE is allowed interruptions on any active serving cell if UE is not capable of Per-FR gap, or on active serving cell(s) in FR1 if UE is capable of Per-FR gap, during the switching from the carrier of a serving cell in FR1 not configured for PUCCH/PUSCH transmission,

- with up to X1 slot as specified in Table 8.2.2.2.9-1.

When SRS carrier based switching is performed between carriers, the UE is allowed interruptions on any active serving cell if UE is not capable of Per-FR gap, or on active serving cell(s) in FR2 if UE is capable of Per-FR gap, during the switching from the carrier of a serving cell in FR2 not configured for PUCCH/PUSCH transmission,

- with up to X2 slot as specified in Table 8.2.2.2.9-2.

Table 8.2.2.2.9-1: Interruption length X1 (slot)

μ	NR Slot length (ms) of victim cell	SRS carrier switching time (us)[Note 1]	Interruption length X1 (slots)	
			Sub carrier spacing for agressor cell (kHz)	
			15	30
0	1	≤ 200	2	2
		300, 500	2	2
		900	2	2
1	0.5	≤ 200	3	2
		300, 500	3	3
		900	4	4
2	0.25	≤ 200	4	3
		300, 500	5	4
		900	7	6
3	0.125	≤ 200	7	5
		300, 500	9	7
		900	12	10
5	0.03125	≤ 200	22	15
		300, 500	31	24
		900	44	37
6	0.015625	≤ 200	42	28
		300, 500	61	47
		900	87	73
Note1: NR SRS carrier switching time is UE capability indicated by higher layer parameter *SRS-SwitchingTimeNR*.				

Table 8.2.2.2.9-2: Interruption length X2 (slot)

μ	length (ms) of victim cell	switching time (us) [Note 1]	Sub carrier spacing for agressor cell (kHz)			
			60	120	480	960

0	1	≤ 200	2	2	2	2
1	0.5	≤ 200	2	2	2	2
2	0.25	≤ 200	3	3	2	2
3	0.125	≤ 200	4	4	3	3
5	0.03125	≤ 200	11	10	8	8
6	0.015625	≤ 200	21	18	15	15
Note1: NR SRS carrier switching time is UE capability indicated by higher layer parameter *SRS-SwitchingTimeNR*.						

For intra-band SRS carrier switching in FR1 or FR2, interruptions in Table 8.2.2.2.9-1 and in Table 8.2.2.2.9-2 based on SRS carrier switching time ≤ 200us shall apply. For inter-band SRS carrier switching in FR1, interruptions in Table 8.2.2.2.9-1 and in Table 8.2.2.2.9-2 shall apply.

8.2.2.2.10 DL Interruptions at UE switching between two uplink carriers

The DL interruption requirements at dynamic switching between two uplink carreirs specified in this clause are applicable for an uplink band pair of an inter-band UL CA configuration in FR1 when the capability *uplinkTxSwitchingPeriod* is present, and is only applicable for uplink switching mechanism specified in clause 6.1.6 of TS 38.214 [26], where NR uplink carrier 1 is capable of one transmit antenna connector and NR uplink carrier 2 is capable of two transmit antenna connectors, and the two uplink carriers are in different bands with different carrier frequencies.

When dynamic switching between two uplink carriers is conducted, UE is allowed to cause DL interruption of X OFDM symbols in NR downlink carrier(s) as indicated by *uplinkTxSwitching-DL-Interruption* [2]. The DL interruption starts from the first OFDM symbol which fully or partially overlaps with the UL switching period located in either NR carrier 1 or carrier 2 as indicated in RRC signalling [2]. The DL interruption lengths of X are defined in Table 8.2.2.2.10-1.

No DL interruption is allowed in the NR downlink carrier(s) which is not indicated by *uplinkTxSwitching-DL-Interruption*. No DL interruption is allowed for some inter-band UL CA configurations as specified in clause 5.2A.2 of TS 38.101-1 [18].

Table 8.2.2.2.10-1: DL interruption length on NR carrier(s) in the unit of OFDM symbols (X) for switching between two uplink carriers

μ	NR Slot length (ms)	Uplink Tx switching period Note1		
		35us	140us	210us
0	1	2	3	4
1	0.5	3	6	7
2	0.25	4	10	14
Note 1: Uplink Tx switching period depends on UE capability *uplinkTxSwitchingPeriod*				

8.2.2.2.10A DL Interruptions at UE switching between two uplink carriers with two transmit antenna connectors

The DL interruption requirements at dynamic switching between two uplink carriers specified in this clause are applicable for an uplink band pair of an inter-band UL CA configuration when the capability *[uplinkTxSwitchingPeriod2T2T]* is present, and is only applicable for uplink switching mechanism specified in clause 6.1.6 of TS 38.214 [26], where NR UL carrier 1 is capable of two transmit antenna connectors and NR UL carrier 2 is capable of two transmit antenna connectors, and the two uplink carriers are in different bands with different carrier frequencies.

When dynamic switching between two uplink carriers is conducted, UE is allowed to cause DL interruption of X OFDM symbols in NR downlink carrier(s) as indicated by *uplinkTxSwitching-DL-Interruption* [2]. The DL interruption starts from the first OFDM symbol which fully or partially overlaps with the UL switching period located in either NR carrier 1 or carrier 2 as indicated in RRC signalling [2]. The DL interruption lengths of X are defined in Table 8.2.2.2.10A-1.

No DL interruption is allowed in the NR downlink carrier(s) which is not indicated by *uplinkTxSwitching-DL-Interruption*. No DL interruption is allowed for some inter-band UL CA configurations as specified in clause 5.2A.2 of TS 38.101-1 [18].

Table 8.2.2.2.10A -1: DL interruption length on NR carrier(s) in the unit of OFDM symbols (X) for switching between two uplink carriers

μ	NR Slot length (ms)	Uplink Tx switching period Note1		
		35us	140us	210us
0	1	2	3	4
1	0.5	3	6	7
2	0.25	4	10	14
Note 1: Uplink Tx switching period depends on UE capability [*uplinkTxSwitchingPeriod2T2T]*.				

8.2.2.2.10B DL Interruptions at UE switching between one uplink band with one transmit antenna connector and one uplink band with two transmit antenna connectors

The DL interruption requirements at dynamic switching between two uplink bands specified in this clause are applicable for an uplink band pair of an inter-band UL CA configuration when the capability *[uplinkTxSwitchingPeriod]* is present, and is only applicable for uplink switching mechanism specified in clause 6.1.6 of TS 38.214 [26], where NR UL carrier 1 in band A is capable of one transmit antenna connector, NR UL carrier 2 and carrier 3 in band B are capable of two transmit antenna connectors. NR UL carrier 2 and carrier 3 are two contiguous aggregated carriers, and band A and band B are different bands with different carrier frequencies.

When dynamic switching between two uplink bands is conducted, UE is allowed to cause DL interruption of X OFDM symbols in NR downlink carrier(s) as indicated by *uplinkTxSwitching-DL-Interruption* [2]. The DL interruption starts from the first OFDM symbol which fully or partially overlaps with the UL switching period located in either NR band A or band B as indicated in RRC signalling [2]. The DL interruption lengths of X are defined in Table 8.2.2.2.10-1.

No DL interruption is allowed in the NR downlink carrier(s) which is not indicated by *uplinkTxSwitching-DL-Interruption*. No DL interruption is allowed for some inter-band UL CA configurations as specified in clause 5.2A.2 of TS 38.101-1 [18].

8.2.2.2.10C DL Interruptions at UE switching between two uplink bands with two transmit antenna connectors

The DL interruption requirements at dynamic switching between two uplink bands specified in this clause are applicable for an uplink band pair of an inter-band UL CA configuration when the capability *[uplinkTxSwitchingPeriod2T2T]* is present, and is only applicable for uplink switching mechanism specified in clause 6.1.6 of TS 38.214 [26], where NR UL carrier 1 in band A is capable of two transmit antenna connectors, NR UL carrier 2 and carrier 3 in band B are capable of two transmit antenna connectors. NR UL carrier 2 and carrier 3 are two contiguous aggregated carriers, and band A and band B are different bands with different carrier frequencies.

When dynamic switching between two uplink bands is conducted, UE is allowed to cause DL interruption of X OFDM symbols in NR downlink carrier(s) as indicated by *uplinkTxSwitching-DL-Interruption* [2]. The DL interruption starts from the first OFDM symbol which fully or partially overlaps with the UL switching period located in either NR band A or band B as indicated in RRC signalling [2]. The DL interruption lengths of X are defined in Table 8.2.2.2.10A -1.

No DL interruption is allowed in the NR downlink carrier(s) which is not indicated by *uplinkTxSwitching-DL-Interruption*. No DL interruption is allowed for some inter-band UL CA configurations as specified in clause 5.2A.2 of TS 38.101-1 [18].

8.2.2.2.11 Interruptions at direct SCell activation

When one or multiple SCell(s) are directly activated at SCell addition,

- the UE is allowed an interruption on any active serving cell:
  - of up to the duration shown in Table 8.2.2.2.1-1, if the active serving cell is not in the same band as the SCell being directly activated, or
  - of up to the duration shown in Table 8.2.2.2.1-2, if the active serving cells are in the same band as the SCell being activated provided the cell specific reference signals from the active serving cells and the SCell being activated are available in the same slot.

8.2.2.2.12 Interruptions due to SCell dormancy

8.2.2.2.12.1 Interruptions due to SCell dormancy switch

When one SCell in MCG is switched from dormancy to non-dormancy or from non-dormancy to dormancy [7] when UE is in DRX active time,

- the UE is allowed an interruption on active serving cell in MCG as defined in clause 8.2.2.2.5, except that the interruption is allowed regardless of which parameters change between the dormant BWP and the non-dormant BWP
- The starting time of interruption shall be within the dormancy switching delay as defined in clause 8.6.2.

When multiple SCells in MCG are switched from dormancy to non-dormancy or vice versa when the UE is in DRX active time, the interruption requirement described above applies for each BWP switch.

8.2.2.2.12.2 Interruptions due to CQI measurements during SCell dormancy

When one or more SCells are in dormancy, the UE is for the purpose of CQI measurements on the dormant SCell(s) allowed to cause interruptions to non-dormant serving cell(s).

The rate of ACK/NACK feedback loss on any non-dormant serving cell resulting from CQI measurements on dormant SCells shall not exceed 0.5%.

8.2.2.2.12.3 Interruptions due to RRM measurements during SCell dormancy

When one or more SCells are in dormancy, the UE is for the purpose of RRM measurements on the dormant SCell(s) allowed to cause interruptions to non-dormant serving cell(s).

The rate of ACK/NACK feedback loss on any non-dormant serving cell resulting from RRM measurements on dormant SCells shall not exceed 1.0%.

8.2.2.2.13 Interruptions at transitions between active and non-active during DRX

For the UEs that are capable of *secondaryDRX-Group*[14] in FR1+FR2 CA, when two DRX groups are configured each group of serving cells, no interruption is allowed for UEs supporting either per UE or per FR gaps.

8.2.2.2.14 Interruptions when identifying CGI of an NR cell with autonomous gaps

When a UE is identifying CGI of an NR cell with autonomous gaps, the UE is allowed interruptions on PCell or any activated SCell:

- with up to K1 interruptions with interrupted slots up to interruption length X1 specified in Table 8.2.2.2.14-1 for each interruption during MIB decoding time period T_{MIB} (ms) specified in clause 9.11.
- with up to L1 interruptions with interrupted slots up to interruption length Y1 specified in Table 8.2.2.2.14-1 for each interruption during SIB1 decoding time period T_{SIB1} (ms) specified in clause 9.11 for SSB and CORESET for RMSI scheduling multiplexing patterns 1.
- with up to L2 interruptions with interrupted slots up to interruption length Y2 specified in Table 8.2.2.2.14-1 for each interruption during SIB1 decoding time period T_{SIB1} (ms) specified in clause 9.11 for SSB and CORESET for RMSI scheduling multiplexing patterns 2 and 3.

Where:

- K1 = 6 for the target cell carrier frequency on FR1 and K1 = 25 for the target cell carrier frequency on FR2, and
- L1 = T_{SIB1}/20and
- L2 = T_{SIB1}/T_{SMTC}, where T_{SMTC} is the periodicity of the SMTC occasion configured for the target cell carrier.

Table 8.2.2.2.14-1: Interruption length X1, Y1 and Y2 during measurements with autonomous gaps

μ	NR Slot length (ms) of victim cell	Interruption length X1 (slots)	Interruption length Y1 (slots)	Interruption length Y2 (slots)
0	1	6	7	6
1	0.5	12	13	10
2	0.25	24	25	19
3	0.125	48	49	37

8.2.2.2.15 Interruptions when identifying CGI of an E-UTRA cell with autonomous gaps

When a UE is identifying CGI of an E-UTRA FDD cell or E-UTRA TDD cell with autonomous gaps, within time period $T_{identify_CGI,\ E\text{-}UTRA}$ specified in clause 9.4.7.1, the UE shall be able to transmit at least the number of ACK/NACKs specified in Table 8.2.2.2.15-1 on PCell or any activated SCell in the frequency range where autonomous gaps are used, provided that:

- there is continuous DL data allocation,
- no DRX cycle is used,
- no measurement gaps are configured,
- only one code word is transmitted in each slot,
- 2 slot ACK/NACK feedback is configured,
- 20 ms SMTC period is configured.

Table 8.2.2.2.15-1: Minimum number of ACK/NACKs transmitted by the UE during $T_{identify_CGI,\ E\text{-}UTRA}$

Minimum number of transmitted ACK/NACKs	SCS	
	Duplex mode configuration	SCS
	Duplex mode configuration	SCS
84	FDD	15 kHz
193	FDD	30 kHz
402	FDD	60 kHz
28	TDD Note 1	15 kHz
81	TDD Note 1	30 kHz
159	TDD Note 1	60 kHz
233	TDD Note 2	60 kHz
491	TDD Note 2	120 kHz
NOTE 1: TDD UL-DL configuration is as specified in Table A.3.3.1-1 of TS 38.101-1 [18]. NOTE 2: TDD UL-DL configuration is as specified in Table A.3.3.1-1 of TS 38.101-2 [19].		

8.2.2.2.16 Interruptions at NR SRS antenna port switching

The requirements in this clause are applicable to SRS antenna port switching on FR1 and SRS resource(s) is only configured within the last 6 symbols of a slot. For interruption caused by SRS antenna port switching, the victim cell is based on the entry number of the band indicated by *txSwitchImpactToRx* and/or *txSwitchWithAnotherBand* regardless of per-FR MG capability. An UL interruption is allowed on any of the serving cells as indicated in *txSwitchWithAnotherBand*, and a DL interruption is allowed on any of the serving cells as indicated in *txSwitchImpactToRx*.

The UE shall perform SRS antenna port switching only if the below conditions are met.

- the SRS switching is not colliding with any other UL transmission with higher priority defined in TS 38.214 [26] if the serving cell on which the higher priority transmission is performed is a victim cell based on *txSwitchWithAnotherBand* or is the same carrier on which SRS is transmitted.

- the SRS switching is not colliding with any NR measurements (i.e. SSB/CSI-RS based L1/L3 measurements) and the measurements for RLM/BFD/CBD if the serving cell on which the NR measurements and the measurements for RLM/BFD/CBD is performed is a victim cell based on *txSwitchImpactToRx* or is the same carrier on which SRS is transmitted.

No requirements are defined for SRS antenna port switching if aperiodic SRS switching is colliding with aperiodic L1-RSRP/L1-SINR measurements and the serving cell on which the aperiodic L1-RSRP/L1-SINR measurement is configured is indicated in *txSwitchImpactToRx* or is the same carrier on which aperiodic SRS is scheduled/configured.

When 1 SRS symbol is configured in a slot for SRS antenna switching and the aggressor and victim cells are synchronized, the interruption requirement in Table 8.2.2.2.16-1 applies. When 1 SRS symbol is configured in a slot for SRS antenna switching and the aggressor and victim cells are asynchronized, the interruption requirement in Table 8.2.2.2.16-2 applies. For the rest of SRS configurations, the interruption requirement in Table 8.2.2.2.16-3 applies.

Table 8.2.2.2.16-1: Interruption length in symbols of victim CC when 1 SRS symbol is configured, and aggressor and victim cells are synchronized

Victim cell SCS(kHz)	Aggressor cell SCS (kHz)		
	15	30	60
15	3	2	2
30	4	3	3
60	8	6	5
120	14	10	8

Table 8.2.2.2.16.2: Interruption length in slots of victim CC when 1 SRS symbol is configured, and aggressor and victim cells are asynchronized

Victim cell SCS(kHz)	Aggressor cell SCS (kHz)		
	15	30	60
15	2	2	2
30	2	2	2
60	2	2	2
120	2	2	2

Table 8.2.2.2.16-3: Interruption length in slots of victim CC for rest of the SRS configurations for synchronised and asynchronized scenarios

Victim cell SCS(kHz)	Aggressor cell SCS (kHz)		
	15	30	60
15	2	2	2
30	2	2	2
60	3	2	2
120	5	3	3

8.2.2.2.17 Interruptions at fast SCell activation

The requirements in this clause shall apply for the UE configured with PCell and one SCell when aperiodic CSI-RS resources is configured for fast SCell activation.

When one SCell in MCG configured with aperiodic CSI-RS resources is configured for fast SCell activation is activated from deactivated, the UE is allowed:

- an interruption on any active serving cell:

- of up to X2 slot, if the active serving cell and the SCell being activated are in a FR1 band pair or in a FR1+FR2 band pair.
- of up to X2 slot, if the active serving cell and the SCell being activated are in a FR2 band pair and UE is capable of independent beam management on this FR2 band pair.
- Where X2 is specified in Table 8.2.2.2.2-1.

or

- of up to Y2 slot +$T_{ATRS_duration}$, if the active serving cells are in the same band as any of the SCells being activated, when
- SCell to be activated is known and belongs to FR1, if the measurement period of the SCell being activated is larger than [2400ms], or
- SCell is unknown and belongs to FR1, and SCell is contiguous to an active serving cell in the same band

or

- of up to Y2 slot if the active serving cells are in the same band as any of the SCells being activated, when
  - SCell to be activated is known and belongs to FR1, if the measurement period of the SCell being activated is equal to or smaller than [2400ms], or
- SCell to be activated belongs to FR2

Where:

- $T_{ATRS_duration}$ is CSI-RS burst for SCell activation where the CSI-RS burst is defined as four CSI-RS resources in two consecutive slots on the being activated SCell.
- Y2 are specified in Table 8.2.1.2.4-2.

8.2.2.2.18 Interruptions due to PUCCH SCell activation/deactivation

When one SCell configured with PUCCH is activated or deactivated,

- The UE is allowed an interruption on active serving cell as defined in clause 8.2.2.2.2.
- The starting time of interruption shall be within the delay as defined in clause 8.3.12.
- For inter-band CA, if the UE is not capable of *parallelTxPRACH-SRS-PUCCH-PUSCH*, additional interruption is allowed on SRS/PUCCH/PUSCH of active serving cells when colliding with RACH transmission on PUCCH SCell. Interruption occurs on the symbols containing SRS/PUCCH/PUSCH, which overlap with the duration of the PRACH preamble [3] transmitted on the PUCCH SCell.

8.2.3 NE-DC Interruptions

8.2.3.1 Introduction

This clause contains the requirements related to the interruptions on PCell and SCell, when

E-UTRA PSCell transitions between active and non-active during DRX, or

E-UTRA PSCell transitions from non-DRX to DRX, or

E-UTRA PSCell/SCell in SCG or SCell in MCG is added or released, or

E-UTRA PSCell/SCell in SCG or SCell(s) in MCG is activated or deactivated, or

measurements on SCC with deactivated SCell in either E-UTRA SCG or NR MCG or

PUSCH/PUCCH carrier configuration and deconfiguration in NR MCG, or

UL/DL BWP is switched on PCell or SCell in MCG, or

UE-specific CBW is changed on PCell or SCell in MCG, or

CGI reading of an NR neighbour cell with autonomous gaps, or

CGI reading of an E-UTRA neighbour cell with autonomous gaps.

NR SRS carrier based switching, or

E-UTRA SRS carrier based switching, or

NR SRS antenna port switching.

SCell in NR MCG is activated based on aperiodic CSI-RS.

The requirements shall apply for NE-DC with an NR PCell.

This clause contains interruptions where victim cell is PCell or SCell belonging to MCG. Requirements for interruptions requirements when the victim cell is E-UTRA PSCell or E-UTRA SCell belonging to SCG are specified in TS 36.133 [15].

For a UE which does not support per-FR measurement gap, interruptions to the PCell, E-UTRA PSCell or activated MCG SCells may be caused by EUTRA PSCell, EUTRA SCells or SCells on any frequency range. For UE which support per-FR gap, interruptions to the PCell, E-UTRA PSCell or activated MCG SCells may be caused by EUTRA PSCell, EUTRA SCells or SCells on the same frequency range as the victim cell.

8.2.3.2 Requirements

8.2.3.2.1 Interruptions at transitions between active and non-active during DRX

Interruption on PCell and the activated SCell if configured due to E-UTRA PSCell transitions between active and non-active druing DRX when PCell or SCell is in non-DRX are allowed with up to 1% probability of missed ACK/NACK when the configured E-UTRA PSCell DRX cycle is less than 640 ms, and 0.625% probability of missed ACK/NACK is allowed when the configured E-UTRA PCell DRX cycle is 640 ms or longer. Each interruption shall not exceed X slot as defined in table 8.2.3.2.1-1.

Table 8.2.3.2.1-1: Interruption length X at transition between active and non-active during DRX

μ	NR slot length (ms)	Interruption length X (slots)	
		Sync	Async
0	1	1	2
1	0.5	1	2
2	0.25	3	
3	0.125	5	

When both PCell and E-UTRA PSCell are in DRX, no interruption is allowed.

8.2.3.2.2 Interruptions at transitions from non-DRX to DRX

Interruption on PCell and the activated SCell if configured due to E-UTRA PSCell transitions from non-DRX to DRX when PCell or SCell is in non-DRX shall not exceed X slots as defined in table 8.2.3.2.1-1.

8.2.3.2.3 Interruptions at PSCell/SCell addition/release

The requirements in this clause shall apply for the UE configured with E-UTRA PSCell.

When one E-UTRA PSCell/SCell in SCG is added or released:

- the UE is allowed an interruption on any active serving cell in MCG:
  - of up to X1 slots, if the active serving cell is not in the same band as any of the E-UTRA PSCell/SCells being added or released, or
  - of up to max{Y1 slots + $T_{SMTC_duration}$, 5ms} if the active serving cells are in the same band as any of the E-UTRA PSCell/SCells being added or released, provided the cell specific reference signals from the active serving cells and the E-UTRA PSCell/SCells being added or released are available in the same slot, where $T_{SMTC_duration}$ is the longest SMTC duration among all above activated serving cells in MCG;

  Where X1 and Y1 are specified in Table 8.2.3.2.3-1.

When one SCell in MCG is added or released:

- the UE is allowed an interruption on any activated serving cell in MCG:
  - of up to X1 slots, if the active serving cell and the SCell being added or released are in a FR1 band pair or in a FR1+FR2 band pair.
  - of up to X1 slot, if the active serving cell and the SCell being added or released are in a FR2 band pair and UE is capable of independent beam management on this FR2 band pair.

  or

  - of up to Y1 slots + $T_{SMTC_duration}$ if the active serving cells are in the same band as any of the SCells being added or released, provided the cell specific reference signals from the active serving cells and the SCells being added or released are available in the same slot, where, $T_{SMTC_duration}$ is
    - the longest SMTC duration among all above active serving cells in MCG and the SCell being added when one SCell is added. If SSB configuration (*absoluteFrequencySSB*) but no SMTC configuration is provided for the SCell being added, the SSB transmission periodicity is assumed to be 5ms and $T_{SMTC\ duration}$ for the SCell being added is x ms, where x = the number of consecutive subframes containing all SSBs in one SSB burst transmitted by the SCell being added. If no SSB configuration (*absoluteFrequencySSB*) nor SMTC configuration is provided for the SCell being added, $T_{SMTC\ duration}$ for the SCell being added is 0ms;
    - the longest SMTC duration among all above active serving cells in MCG when one SCell is released.

    Where X1 and Y1 are specified in Table 8.2.3.2.3-2.

Table 8.2.3.2.3-1: Interruption length X1 and Y1 at E-UTRA PSCell/SCell addition/release

μ	NR Slot length (ms)	Interruption length X1 (slots)		Interruption length Y1 (slots)	
		Sync	Async	Sync	Async
0	1	1	2	1	2
1	0.5	2	3	2	3
2	0.25	5		4	5
3	0.125	9		N/A	N/A

Table 8.2.3.2.3-2: Interruption length X1 and Y1 at SCell addition/Release

μ	NR Slot length (ms) of victim cell	Interruption length X1 (slots)		Interruption length Y1 (slots)
0	1	1		1
1	0.5	2		2
2	0.25	Both aggressor cell and victim cell are on FR2	4	4
		Either aggressor cell or victim cell is on FR1	5	
3	0.125	Aggressor cell is on FR2	8	8
		Aggressor cell is on FR1	9	

8.2.3.2.4 Interruptions at SCell activation/deactivation

The requirements in this clause shall apply for the UE configured with E-UTRA PSCell and one SCell.

When one E-UTRA SCell in SCG is activated from deactivated or dormant state, or deactivated from activated or dormant state:

- the UE is allowed an interruption on any active serving cell in MCG:
  - of up to X2 slots, if the active serving cell is not in the same band as any of the SCells being activated or deactivated, or
  - of up to max{Y2 slots + $T_{SMTC_duration}$, 5ms} if the active serving cells are in the same band as any of the E-UTRA SCells being activated or deactivated, provided the cell specific reference signals from the active serving cells and the E-UTRA SCells being activated or deactivated are available in the same slot, where $T_{SMTC_duration}$ is the longest SMTC duration among all above active serving cells in MCG.

  Where X2 and Y2 are specified in Table 8.2.3.2.4-1.

When one SCell in MCG is activated or deactivated:

- the UE is allowed an interruption on any serving cell in MCG:
  - of up to X2 slots, if the active serving cell is not in the same band as any of the SCells being activated or deactivated, or
  - of up to Y2 slots + $T_{SMTC_duration}$ if the active serving cells are in the same band as any of the SCells being activated or deactivated, provided the cell specific reference signals from the active serving cells and the SCells being activated or deactivated are available in the same slot, where, $T_{SMTC_duration}$ is
    - the longest SMTC duration among all above active serving cells in MCG and the SCell being activated when one SCell is activated, If SSB configuration (*absoluteFrequencySSB*) but no SMTC configuration is provided for the SCell being activated, the SSB transmission periodicity is assumed to be 5ms and $T_{SMTC\ duration}$ for the SCell being activated is x ms, where x = the number of consecutive subframes containing all SSBs in one SSB burst transmitted by the SCell being activated. If no SSB configuration (*absoluteFrequencySSB*) nor SMTC configuration is provided for the SCell being activated, $T_{SMTC\ duration}$ for the SCell being activated is 0ms;
    - the longest SMTC duration among all above active serving cells in MCG when one SCell is deactivated.

  Where X2 and Y2 are specified in Table 8.2.3.2.4-2.

Table 8.2.3.2.4-1: Interruption length X2 and Y2 at E-UTRA SCell activation/deactivation

μ	NR Slot length (ms)	Interruption length X2 (slots)		Interruption length Y2 (slots)	
		Sync	Async	Sync	Async
0	1	1	2	1	2
1	0.5	1	2	1	2
2	0.25	3		2	3
3	0.125	5		N/A	N/A

Table 8.2.3.2.4-2: Interruption length X2 and Y2 at SCell activation/deactivation

μ	NR Slot length (ms) of victim cell	Interruption length X2 (slots)	Interruption length Y2 (slots)
0	1	1	1
1	0.5	1	1

2	0.25	Both aggressor cell and victim cell are on FR2	2	2
		Either aggressor cell or victim cell is on FR1	3	
3	0.125	Aggressor cell is on FR2	4	4
		Aggressor cell is on FR1	5	

8.2.3.2.5 Interruptions during measurements on SCC

8.2.3.2.5.1 Interruptions during measurements on deactivated NR SCC

Interruption on PCell and other activated SCell(s) during measurement on the deactivated NR SCC shall meet requirements in clause 8.2.2.2.3.

8.2.3.2.5.2 Interruptions during measurements on deactivated E-UTRAN SCC

When one E-UTRA SCell in SCG is deactivated, the UE is allowed due to measurements on the E-UTRA SCC with the deactivated E-UTRA SCell:

- an interruption on PCell or any activated SCell with up to 0.5% probability of missed ACK/NACK when any of the configured *measCycleSCell* [15] for the deactivated E-UTRA SCells is 640 ms or longer.
- an interruption on PCell or any activated SCell with up to 0.5% probability of missed ACK/NACK regardless of the configured *measCycleSCell* [15] for the deactivated E-UTRA SCells if indicated by the network using IE *allowInterruptions* [15].

Each interruption shall not exceed

- X3 slots, if the PCell or activated SCell is not in the same band as the E-UTRA deactivated SCC being measured, or
- Y3 slots + SMTC duration, if the PCell or activated SCell is in the same band as the E-UTRA deactivated SCC being measured, provided the cell specific reference signals from the PCell or activated SCell and the E-UTRA deactivated SCC being measured are available in the same slot.

  Where X3 and Y3 are specified in Table 8.2.3.2.5-1

Table 8.2.3.2.5-1: Interruption length X3 and Y3 at measurements on deactivated E-UTRA SCC

μ	NR Slot length (ms)	Interruption length X3 (slots)		Interruption length Y3 (slot)	
		Sync	Async	Sync	Async
0	1	1	2	1	2
1	0.5	1	2	1	2
2	0.25	3		2	3
3	0.125	5		N/A	N/A

8.2.3.2.5.3 Interruptions during CQI measurements on dormant E-UTRAN SCC

When one E-UTRA SCell in SCG is dormant, the UE is allowed due to CQI measurements on the dormant E-UTRA SCell:

- an interruption on PCell or any activated SCell with up to 0.5% probability of missed ACK/NACK.

Each interruption shall not exceed

- X3 slots, if the PCell or activated SCell is not in the same band as the E-UTRA dormant SCell being measured, or
- Y3 slots + SMTC duration, if the PCell or activated SCell is in the same band as the E-UTRA dormant SCell being measured, provided the cell specific reference signals from the PSCell or activated SCell and the E-UTRA dormant SCell being measured are available in the same slot.

Where X3 and Y3 are defined in Table 8.2.3.2.5.2-1.

8.2.3.2.5.4 Interruptions during RRM measurements on dormant E-UTRAN SCC

When one E-UTRA SCell in SCG is dormant, the UE is allowed due to RRM measurements on the E-UTRA SCC with the dormant E-UTRA SCell:

- an interruption on PCell or any activated SCell with up to 0.5% probability of missed ACK/NACK.

Each interruption shall not exceed

- X3 slots, if the PCell or activated SCell is not in the same band as the E-UTRA dormant SCC being measured, or
- Y3 slots + SMTC duration, if the PCell or activated SCell is in the same band as the E-UTRA dormant SCC being measured, provided the cell specific reference signals from the PSCell or activated SCell and the E-UTRA dormant SCC being measured are available in the same slot.

Where X3 and Y3 are defined in Table 8.2.3.2.5.2-1.

8.2.3.2.6 Interruptions at UL carrier RRC reconfiguration

The requirements in this clause shall apply when a supplementary UL carrier or an UL carrier is configured or de-configured in NE-DC.

When an UL carrier or supplementary UL carrier is configured or deconfigured, an interruption of up to X4 slot as specified in Table 8.2.3.2.6-1, is allowed during the RRC reconfiguration procedure in TS 38.331 [2] on PCell, all activated SCells within the same FR as the reconfigured uplink carrier. The interruption is for both uplink and downlink of PCell, all activated E-UTRA SCells, E-UTRA PSCell and all activated SCells within the same FR as the configured or de-configured UL.

Table 8.2.3.2.6-1: Interruption length X4 at UL carrier RRC reconfiguration

μ	NR Slot length (ms)	Interruption length X4 (slots)	
		Sync	Async
0	1	1	2
1	0.5	2	3
2	0.25	5	
3	0.125	9	

8.2.3.2.7 Interruptions due to Active BWP switching Requirement

The requirements for DCI-based BWP switch , timer-based BWP switch or UL BWP switch triggered by consistent uplink CCA failures in this clause apply to the case that the BWP switch is performed on a single CC or multiple CCs.

When either of the DCI-based, timer-based or RRC-based downlink BWP switch and/or uplink BWP switch occur on multiple CCs simultaneously or over partially overlapping period, the interruption requirements described in this clause apply for each BWP switch.

When UE receives a DCI indicating the UE to switch its active BWP, or when a BWP timer *bwp-InactivityTimer* defined in TS 38.331 [2] expires, or when the UE receives an RRC command indicating the UE to switch its active BWP or when UL BWP switch is triggered by consistent uplink CCA failures, the UE is allowed an interruption on PCell and any activated SCells as defined in clause 8.2.2.2.5.

8.2.3.2.8 Interruptions at direct SCell activation and hibernation

8.2.3.2.8.1 Interruptions during direct SCell activation and hibernation of E-UTRA SCell

When one E-UTRA SCell in SCG is directly activated and hibernated:

- the UE is allowed an interruption on any active serving cell in MCG:

- of up to X1 slot, if the active serving cell is not in the same band as any of the E-UTRA SCells being directly activated or hibernated, or

- of up to max{Y1 slot + $T_{SMTC_duration}$, 5ms} if the active serving cells are in the same band as any of the E-UTRA SCells being directly activated or hibernated, provided the cell specific reference signals from the active serving cells and the E-UTRA SCells being directly activated or hibernated are available in the same slot, where $T_{SMTC_duration}$ is the longest SMTC duration among all above active serving cells in MCG.

Where X1 and Y1 are specified in Table 8.2.3.2.3-1.

8.2.3.2.8.2 Interruptions during direct SCell activation

When one or multiple SCell(s) in MCG are directly activated at SCell addition:

- the UE is allowed an interruption on any active serving cell in MCG:

  - of up to X1 slot, if the active serving cell is not in the same band as the SCell being directly activated, or

  - of up to max{Y1 slot + $T_{SMTC_duration}$, 5ms} if the active serving cells are in the same band as the SCell being directly activated, provided the cell specific reference signals from the active serving cells and the SCell being directly activated are available in the same slot, where $T_{SMTC_duration}$ is the longest SMTC duration among all above active serving cells in MCG.

  Where X1 and Y1 are specified in Table 8.2.3.2.3-2.

8.2.3.2.9 Interruptions at SCell hibernation

When one E-UTRA SCell in SCG is hibernated:

- the UE is allowed an interruption on any active serving cell in MCG:

  - of up to X2 slot, if the active serving cell is not in the same band as any of the E-UTRA SCells being hibernated, or

  - of up to max{Y2 slot + $T_{SMTC_duration}$, 5ms} if the active serving cells are in the same band as any of the E-UTRA SCells being hibernated, provided the cell specific reference signals from the active serving cells and the E-UTRA SCells being hibernated are available in the same slot, where $T_{SMTC_duration}$ is the longest SMTC duration among all above active serving cells in MCG.

  Where X2 and Y2 are specified in Table 8.2.3.2.4-1.

8.2.3.2.10 Interruptions at SCell activation/deactivation with multiple downlink SCells

The requirements in this clause shall apply for the UE configured with E-UTRA PSCell and up to 6 downlink SCell(s).

When multiple SCells in MCG are activated or deactivated by one single MAC CE command:

- an interruption on any serving cell in MCG is specified as in clause 8.2.3.2.4.

8.2.3.2.11 Interruptions at NR SRS carrier based switching

SRS transmission can be configured on a carrier not configured for PUCCH/PUSCH transmission. When a UE needs to transmit periodic, semi-persistent or aperiodic SRS on a carrier of a serving cell not configured for PUCCH/PUSCH transmission, the UE can perform carrier based switching to one or more carriers not configured for PUCCH/PUSCH transmission from a carrier with PUCCH/PUSCH transmission or from a carrier not configured for PUCCH/PUSCH transmission prior to transmitting SRS, provided that:

- switching is from a configured carrier to another activated carrier;

- the carrier of SCells not configured for PUCCH/PUSCH transmission to which SRS carrier based switching is performed is indicated by DCI SRS request field for aperiodic SRS transmission, or indicated by MAC-CE for semi-persistent SRS transmission, or configured via RRC for periodic SRS transmission;

- the serving cell, from which SRS carrier based switching is performed and whose UL transmission may therefore be interrupted, is indicated by srs-SwitchFromServCellIndex and srs-SwitchFromCarrier in TS38.331 [2];

- the SRS switching is not colliding with any other transmission with higher priority defined in TS 38.214 [26].

- the SRS switching is not colliding with any SSB/CSI-RS based L3 measurements and the measurements for RLM/BFD in MCG.- for UE, which does not support simultaneous reception and transmission for inter-band TDD CA specified in TS 38.331 [2], and is compliant to the requirements for inter-band CA with uplink in one NR band and without simultaneous Rx/Tx specified in TS 38.101-3 [20], the SRS transmission are not simultaneously scheduled with DL SSB/CSI-RS for L3 or L1 measurements transmission on other carriers.

The UE shall not perform SRS carrier based switching if the above conditions cannot be met.

When SRS carrier based switching is performed between carriers, the UE is allowed interruptions on any active serving cell in MCG if UE is not capable of Per-FR gap, or on active serving cell(s) in MCG in FR1 if UE is capable of Per-FR gap, during the switching to the carrier of a serving cell in FR1 not configured for PUCCH/PUSCH transmission,

- with up to X1 slot as specified in Table 8.2.3.2.11-1.

When SRS carrier based switching is performed between carriers, the UE is allowed interruptions on any active serving cell in MCG if UE is not capable of Per-FR gap, or on active serving cell(s) in MCG in FR2 if UE is capable of Per-FR gap, during the switching to the carrier of a serving cell in FR2 not configured for PUCCH/PUSCH transmission,

- with up to X2 slot as specified in Table 8.2.3.2.11-2.

When SRS carrier based switching is performed between carriers, the UE is allowed interruptions on any active serving cell in MCG if UE is not capable of Per-FR gap, or on active serving cell(s) in MCG in FR1 if UE is capable of Per-FR gap, during the switching from the carrier of a serving cell in FR1 not configured for PUCCH/PUSCH transmission,

- with up to X1 slot as specified in Table 8.2.3.2.11-1.

When SRS carrier based switching is performed between carriers, the UE is allowed interruptions on any active serving cell in MCG if UE is not capable of Per-FR gap, or on active serving cell(s) in MCG in FR2 if UE is capable of Per-FR gap, during the switching from the carrier of a serving cell in FR2 not configured for PUCCH/PUSCH transmission,

- with up to X2 slot as specified in Table 8.2.3.2.11-2.

Table 8.2.3.2.11-1: Interruption length X1 (slot)

μ	NR Slot length (ms) of victim cell	SRS carrier switching time (us)[Note 1]	Interruption length X1 (slots)	
			Sub carrier spacing for agressor cell (kHz)	
			15	30
0	1	≤ 200	2	2
		300, 500	2	2
		900	3	3
1	0.5	≤ 200	3	2
		300, 500	3	3
		900	4	4
2	0.25	≤ 200	4	3
		300, 500	5	4
		900	7	6
3	0.125	≤ 200	7	5
		300, 500	9	7
		900	12	10
Note1: NR SRS carrier switching time is UE capability indicated by higher layer parameter *SRS-SwitchingTimeNR*.				

Table 8.2.3.2.11-2: Interruption length X2 (slot)

μ	NR Slot length (ms) of victim cell	SRS carrier switching time (us) [Note 1]	Interruption length X2 (slots)	
			Sub carrier spacing for agressor cell (kHz)	
			60	120
0	1	≤ 200	2	2

1	0.5	≤ 200	2	2
2	0.25	≤ 200	3	3
3	0.125	≤ 200	4	4
Note1: NR SRS carrier switching time is UE capability indicated by higher layer parameter *SRS-SwitchingTimeNR*.				

For intra-band SRS carrier switching in FR1 or FR2, interruptions in Table 8.2.3.2.11-1 and in Table 8.2.3.2.11-2 based on SRS carrier switching time ≤ 200us shall apply. For inter-band SRS carrier switching in FR1, interruptions in Table 8.2.3.2.11-1 and in Table 8.2.3.2.11-2 shall apply.

8.2.3.2.12 Interruptions at E-UTRA SRS carrier based switching

A PUSCH-less carrier of E-UTRA SCell is a TDD carrier without PUCCH/PUSCH configured. When a UE needs to transmit periodic or aperiodic SRS [23] and/or non-contention based PRACH on a PUSCH-less E-UTRA carrier of SCell, the UE can perform carrier based switching to one or more PUSCH-less carrier of E-UTRA SCells from a E-UTRA carrier with PUSCH or from another PUSCH-less E-UTRA carrier of SCell prior to transmitting SRS and/or PRACH, provided that:

- switching is from a configured E-UTRA carrier to another activated TDD carrier;
- the PUSCH-less carrier of E-UTRA SCells to which SRS carrier based switching is performed is indicated by DCI SRS request field for aperiodic SRS transmission or configured via RRC [15] for periodic SRS transmission;
- the E-UTRA serving cell, from which SRS carrier based switching is performed and whose UL transmission may therefore be interrupted, is indicated by srs-SwitchFromServCellIndex [15];
- the SRS switching is not colliding with any other transmission with higher priority defined in TS36.213 [TBD];
- the SRS switching is not colliding with PDCCH in subframe 0 and 5 as specified in TS36.213 [TBD];
- for UE, which does not support simultaneous reception and transmission for inter-band TDD CA specified in TS 36.331 [2], and is compliant to the requirements for inter-band CA with uplink in one E-UTRA band and without simultaneous Rx/Tx specified in TS 36.101 [25], the SRS or RACH transmission are not simultaneously scheduled with DL subframe #0 or DL subframe #5 on other E-UTRA carriers.

The UE shall not perform SRS carrier based switching if the above conditions cannot be met.

When SRS carrier based switching is performed between E-UTRA carriers, the UE is allowed interruptions on any active serving cell in MCG if UE is not capable of Per-FR gap, or on active serving cell(s) in MCG in FR1 if UE is capable of Per-FR gap, during the switching to the PUSCH-less carrier of a serving cell,

- with up to X2 slot as specified in Table 8.2.3.2.12-1.

When SRS carrier based switching is performed between E-UTRA carriers, the UE is allowed interruptions on any active serving cell in MCG if UE is not capable of Per-FR gap, or on active serving cell(s) in MCG in FR1 if UE is capable of Per-FR gap, during the switching from the PUSCH-less carrier of a serving cell,

- with up to X2 slot as specified in Table 8.2.3.2.12-1

Table 8.2.3.2.12-1: Interruption length X2 (slot)

μ	NR Slot length (ms)	Interruption length X2 (slots)
0	1	2
1	0.5	3
2	0.25	5
3	0.125	9

8.2.3.2.13 Interruptions due to SCell dormancy

8.2.3.2.13.1 Interruptions due to SCell dormancy switch

When one SCell in MCG is switched from dormancy to non-dormancy or from non-dormancy to dormancy [7] when UE is in DRX active time,

- the UE is allowed an interruption on active serving cell in MCG as defined in clause 8.2.3.2.7, except that the interruption is allowed regardless of which parameters change between the dormant BWP and the non-dormant BWP
- The starting time of interruption shall be within the dormancy switching delay as defined in clause 8.6.2.

When multiple SCells in MCG are switched from dormancy to non-dormancy or vice versa when the UE is in DRX active time, the interruption requirement described above applies for each BWP switch.

8.2.3.2.13.2 Interruptions due to CQI measurements during SCell dormancy

When one or more SCells are in dormancy, the UE is for the purpose of CQI measurements on the dormant SCell(s) allowed to cause interruptions to non-dormant serving cell(s).

The rate of ACK/NACK feedback loss on any non-dormant serving cell resulting from CQI measurements on dormant SCells shall not exceed 0.5%.

8.2.3.2.13.3 Interruptions due to RRM measurements during SCell dormancy

When one or more SCells are in dormancy, the UE is for the purpose of RRM measurements on the dormant SCell(s) allowed to cause interruptions to non-dormant serving cell(s).

The rate of ACK/NACK feedback loss on any non-dormant serving cell resulting from RRM measurements on dormant SCells shall not exceed 1.0%.

8.2.3.2.14 Interruptions when identifying CGI of an NR cell with autonomous gaps

When a UE is identifying CGI of an NR cell with autonomous gaps, the UE is allowed interruptions on PCell or any activated SCell:

- with up to K1 interruptions with interrupted slots up to interruption length X1 specified in Table 8.2.3.2.14-1 for each interruption during MIB decoding time period T_{MIB} (ms) specified in clause 9.11.
- with up to L1 interruptions with interrupted slots up to interruption length Y1 specified in Table 8.2.3.2.14-1 for each interruption during SIB1 decoding time period T_{SIB1} (ms) specified in clause 9.11 for SSB and CORESET for RMSI scheduling multiplexing patterns 1.
- with up to L2 interruptions with interrupted slots up to interruption length Y2 specified in Table 8.2.3.2.14-1 for each interruption during SIB1 decoding time period T_{SIB} Where:
- K1 = 6 for the target cell carrier frequency on FR1 and K1 = 25 for the target cell carrier frequency on FR2, and
- L1 = $T_{SIB1}/20$, and
- L2 = T_{SIB1}/T_{SMTC}, where T_{SMTC} is the periodicity of the SMTC occasion configured for the target cell carrier.

Table 8.2.3.2.14-1: Interruption length X1, Y1 and Y2 during measurements with autonomous gaps

μ	NR Slot length (ms) of victim cell	Interruption length X1 (slots)	Interruption length Y1 (slots)	Interruption length Y2 (slots)
0	1	6	7	6
1	0.5	12	13	10
2	0.25	24	25	19
3	0.125	48	49	37

8.2.3.2.15 Interruptions when identifying CGI of an E-UTRA cell with autonomous gaps

When a UE is identifying CGI of an E-UTRA FDD cell or E-UTRA TDD cell with autonomous gaps, within time period

- $T_{identify_CGI,\ intra}$ specified in clause 8.1.2.2.3, or clause 8.1.2.2.4 in TS 36.133 [15], or
- $T_{identify_CGI,\ inter}$ specified in clause 8.1.2.3.5, or clause 8.1.2.3.6, or clause 8.1.2.3.7, or clause 8.1.2.3.6 in TS 36.133 [15], or
- $T_{identify_CGI,\ E\text{-}UTRA}$ specified in clause 9.4.7.1

the UE shall be able to transmit at least the number of ACK/NACKs specified in Table 8.2.3.2.15-1 on PCell or any activated SCell in the frequency range where autonomous gaps are used, provided that:

- there is continuous DL data allocation,
- no DRX cycle is used,
- no measurement gaps are configured,
- only one code word is transmitted in each slot,
- 2 slot ACK/NACK feedback is configured,
- 20 ms SMTC period is configured.

Table 8.2.3.2.15-1: Minimum number of ACK/NACKs transmitted by the UE

Minimum number of transmitted ACK/NACKs	Configuration of the serving cell in which the transmitted ACK/NACKs are counted	
	Duplex mode configuration	SCS
84	FDD	15 kHz
193	FDD	30 kHz
402	FDD	60 kHz
28	TDD Note 1	15 kHz
81	TDD Note 1	30 kHz
159	TDD Note 1	60 kHz
233	TDD Note 2	60 kHz
491	TDD Note 2	120 kHz
NOTE 1: TDD UL-DL configuration is as specified in Table A.3.3.1-1 of TS 38.101-1 [18]. NOTE 2: TDD UL-DL configuration is as specified in Table A.3.3.1-1 of TS 38.101-2 [19].		

8.2.3.2.16 Interruptions at NR SRS antenna port switching

The requirements in this clause are applicable to SRS antenna port switching on FR1 and SRS resource(s) is only configured within the last 6 symbols of a slot. For interruption caused by SRS antenna port switching, the victim cell is based on the entry number of the band indicated by *txSwitchImpactToRx* and/or *txSwitchWithAnotherBand* regardless of per-FR MG capability. An UL interruption is allowed on any of the serving cells as indicated in *txSwitchWithAnotherBand*, and a DL interruption is allowed on any of the serving cells as indicated in *txSwitchImpactToRx*.

The UE shall perform SRS antenna port switching only if the below conditions are met.

- the SRS switching is not colliding with any other UL transmission with higher priority defined in TS 38.214 [26] if the serving cell on which the higher priority transmission is performed is a victim cell based on *txSwitchWithAnotherBand* or is the same carrier on which SRS is transmitted.
- the SRS switching is not colliding with any NR measurements (i.e. SSB/CSI-RS based L1/L3 measurements) and the measurements for RLM/BFD/CBD if the serving cell on which the NR measurements and the measurements for RLM/BFD/CBD is performed is a victim cell based on *txSwitchImpactToRx* or is the same carrier on which SRS is transmitted.

No requirements are defined for SRS antenna port switching if aperiodic SRS switching is colliding with aperiodic L1-RSRP/L1-SINR measurements and the serving cell on which the aperiodic L1-RSRP/L1-SINR measurement is configured is indicated in *txSwitchImpactToRx* or is the same carrier on which aperiodic SRS is scheduled/configured.

No requirements apply when SRS antenna port switching is colliding with E-UTRA measurement if the carrier on which the E-UTRA measurement is performed is indicated in *txSwitchImpactToRx* or is the same carrier on which SRS is scheduled/configured.

When 1 SRS symbol is configured in a slot for SRS antenna switching and the aggressor and victim cells are synchronized, the interruption requirement in Table 8.2.3.2.16-1 applies. When 1 SRS symbol is configured in a slot for SRS antenna switching and the aggressor and victim cells are asynchronized, the interruption requirement in Table 8.2.3.2.16-2 applies. For the rest of SRS configurations, the interruption requirement in Table 8.2.3.2.16-3 applies.

Table 8.2.3.2.16-1: Interruption length in symbols of victim CC when 1 SRS symbol is configured, and aggressor and victim cells are synchronized

Victim cell SCS(kHz)	Aggressor cell SCS (kHz)		
	15	30	60
15	3	2	2
30	4	3	3
60	8	6	5
120	14	10	8

Table 8.2.3.2.16-2: Interruption length in slots of victim CC when 1 SRS symbol is configured, and aggressor and victim cells are asynchronized

Victim cell SCS(kHz)	Aggressor cell SCS (kHz)		
	15	30	60
15	2	2	2
30	2	2	2
60	2	2	2
120	2	2	2

Table 8.2.3.2.16-3: Interruption length in slots of victim CC for rest of the SRS configurations for synchronised and asynchronized scenarios

Victim cell SCS(kHz)	Aggressor cell SCS (kHz)		
	15	30	60
15	2	2	2
30	2	2	2
60	3	2	2
120	5	3	3

8.2.3.2.17 Interruptions at fast SCell activation

The requirements in this clause shall apply for the UE configured with E-UTRA PSCell and one SCell in MCG when aperiodic CSI-RS resources is configured for fast SCell activation.

When one SCell in MCG configured with aperiodic CSI-RS resources is configured for fast SCell activation is activated from deactivated, the UE is allowed:

- the UE is allowed an interruption on any serving cell in MCG:
  - of up to X2 slots, if the active serving cell is not in the same band as any of the SCells being activated, or
  - of up to Y2 slots + $T_{ATRS_duration}$ if the active serving cells are in the same band as any of the SCells being activated, when

- SCell to be activated is known and belongs to FR1, if the measurement period of the SCell being activated is larger than [2400ms], or
- SCell is unknown and belongs to FR1, and SCell is contiguous to an active serving cell in the same band
- of up to Y2 slot if the active serving cells are in the same band as any of the SCells being activated, when
  - SCell to be activated is known and belongs to FR1, if the measurement period of the SCell being activated is equal to or smaller than [2400ms], or
- SCell to be activated belongs to FR2

Where

- $T_{ATRS_duration}$ is CSI-RS burst for SCell activation where the CSI-RS burst is defined as four CSI-RS resources in two consecutive slots on the being activated SCell.
- X2 and Y2 are specified in Table 8.2.3.2.4-2.

8.2.3.2.18 Interruptions due to UE-specific CBW change

The requirements in clause 8.2.1.2.11 apply for this clause.

8.2.3.2.19 Interruptions due to PUCCH SCell activation/deactivation

When one SCell in MCG configured with PUCCH is activated or deactivated,

The UE is allowed an interruption on active serving cell in MCG as defined in clause 8.2.3.2.4.

- The starting time of interruption shall be within the delay as defined in clause 8.3.12.
- For inter-band CA, if the UE is not capable of *parallelTxPRACH-SRS-PUCCH-PUSCH*, additional interruption is allowed on SRS/PUCCH/PUSCH of active serving cells when colliding with RACH transmission on PUCCH SCell. Interruption occurs on the symbols containing SRS/PUCCH/PUSCH, which overlap with the duration of the PRACH preamble [3] transmitted on the PUCCH SCell.

8.2.4 NR-DC: Interruptions

8.2.4.1 Introduction

This clause contains the requirements related to the interruptions on PCell, PSCell and activated SCell if configured, when

up to 1 SCell in FR1 and up to 7 SCell(s) in FR2 are configured, deconfigured, activated or deactivated or,

a supplementary UL carrier or an UL carrier is configured or de-configured, or

measurements on SCC with deactivated SCell in NR SCG, or

measurements on the deactivated PSCell in NR SCG, or

UL/DL BWP is switched on PCell, PSCell or SCell,

UE-specific CBW is changed on PCell, PSCell or SCell, or

transitions between active and non-active during DRX, or

transitions from non-DRX to DRX, or

CGI reading of an NR neighbour cell with autonomous gaps, or

CGI reading of an E-UTRA neighbour cell with autonomous gaps.

NR SRS carrier based switching, or

NR SRS antenna port switching.

RLM/BFD Measurement on deactivatd NR PSCell, or

NR SCell is activated based on aperiodic CSI-RS.

Note: interruptions at SCell addition/release, activation/deactivation and during measurements on SCC may not be required by all UEs.

The interruptions shall not interrupt RRC signalling or ACK/NACKs related to RRC reconfiguration procedure [2] for SCell addition/release or MAC control signalling [17] for SCell activation/deactivation command.

The requirements shall apply for NR-DC with an NR PCell, PSCell or SCell.

For a UE which does not support per-FR measurement gap, interruptions to the PCell and activated SCell may be caused by SCells on any frequency range. For a UE which supports per-FR gaps, interruptions to PCell, PSCell and activated SCell may be caused by SCells on the same frequency range as the victim cell.

8.2.4.2 Requirements

8.2.4.2.1 Interruptions at PSCell/SCell addition/release

When PSCell or one or more SCells is added or released using the same *RRCConnectionReconfiguration* message as defined in TS 38.331 [2], the UE is allowed an interruption on any activated serving cell during the RRC reconfiguration procedure as follows:

- an interruption on any active serving cell:
  - of up to the duration shown in table 8.2.4.2.1-1, if the active serving cell is not in the same band as the PSCell or SCell being added or released, where the requriements for Sync apply for synchronous NR-DC, and for asynchronous NR-DC if the active serving cell is in the same CG as the PSCell or SCell being added or released, and the requriements for Async apply for asynchronous NR-DC if the active serving cell is not in the same CG as the PSCell or SCell being added or released, or
  - of up to the duration shown in table 8.2.4.2.1-2, if the active serving cells are in the same band as the SCell being added or released, provided the cell specific reference signals from the active serving cells and the SCell being added or released are available in the same slot.

Table 8.2.4.2.1-1: Interruption duration for PSCell/SCell addition/release for inter-band DC/CA

μ	NR Slot length (ms) of victim cell	Interruption length (slots)		
		Sync		Async
0	1	1		2
1	0.5	2		3
2	0.25	Both aggressor cell and victim cell are on FR2	4	5
		Either aggressor cell or victim cell is on FR1	5	
3	0.125	Aggressor cell is on FR2	8	9
		Aggressor cell is on FR1	9	
5	0.03125	Aggressor cell is on FR1	33	33

6	0.015625	Aggressor cell is on FR1	65	65

Table 8.2.4.2.1-2: Interruption duration for SCell addition/release for intra-band DC/CA

μ	NR Slot length (ms)	Interruption length (slots)
0	1	1 + $T_{SMTC_duration}$ * $N_{slot}^{subframe,\mu}$
1	0.5	2 + $T_{SMTC_duration}$ * $N_{slot}^{subframe,\mu}$
2	0.25	4 + $T_{SMTC_duration}$ * $N_{slot}^{subframe,\mu}$
3	0.125	8 + $T_{SMTC_duration}$ * $N_{slot}^{subframe,\mu}$
5	0.03125	32+ $T_{SMTC_duration}$ * $N_{slot}^{subframe,\mu}$
6	0.015625	64+ $T_{SMTC_duration}$ * $N_{slot}^{subframe,\mu}$
NOTE 1: $T_{SMTC_duration}$ measured in subframes is - the longest SMTC duration among all above activeserving cells and the SCell being added when one SCell is added. If SSB configuration (*absoluteFrequencySSB*) but no SMTC configuration is provided for the SCell being added, the SSB transmission periodicity is assumed to be 5ms and $T_{SMTC\ duration}$ for the SCell being added is x ms, where x = the number of consecutive subframes containing all SSBs in one SSB burst transmitted by the SCell being added. If no SSB configuration (*absoluteFrequencySSB*) nor SMTC configuration is provided for the SCell being added, $T_{SMTC\ duration}$ for the SCell being added is 0ms; - the longest SMTC duration among all active serving cells in the same band when one SCell is released. NOTE 2: $N_{slot}^{subframe,\mu}$ is as defined in TS 38.211 [6].		

8.2.4.2.2 Interruptions at SCell activation/deactivation

When a SCell is activated or deactivated as defined in TS 37.340 [17], the UE is allowed

- an interruption on any active serving cell:
  - of up to the duration shown in table 8.2.4.2.2-1, if the active serving cell is not in the same band as any of the SCells being activated or deactivated, where the requriements for Sync apply for synchronous NR-DC, and for asynchronous NR-DC if the active serving cell is in the same CG as all the SCells being activated, and the requriements for Async apply for asynchronous NR-DC if the active serving cell is not in the same CG as any of the SCells being activated, or
  - of up to the duration shown in table 8.2.4.2.2-2, if the active serving cells are in the same band as any of the SCells being activated or deactivated provided the cell specific reference signals from the active serving cells and the SCells being activated or deactivated are available in the same slot.

Table 8.2.4.2.2-1: Interruption duration for SCell activation/deactivation for inter-band DC/CA

μ	NR Slot length (ms) of victim cell	Interruption length (slots)	
		Sync	Async
0	1	1	2
1	0.5	1	2

2	0.25	Both aggressor cell and victim cell are on FR2	2	3
		Either aggressor cell or victim cell is on FR1	3	
3	0.125	Aggressor cell is on FR2	4	5
		Aggressor cell is on FR1	5	
5	0.03125	Aggressor cell is on FR1	17	17
6	0.015625	Aggressor cell is on FR1	33	33

Table 8.2.4.2.2-2: Interruption duration for SCell activation/deactivation for intra-band DC/CA

μ	NR Slot length (ms)	Interruption length (slots)
0	1	1 + $T_{SMTC_duration} * N_{slot}^{subframe,\mu}$
1	0.5	1 + $T_{SMTC_duration} * N_{slot}^{subframe,\mu}$
2	0.25	2 + $T_{SMTC_duration} * N_{slot}^{subframe,\mu}$
3	0.125	4 + $T_{SMTC_duration} * N_{slot}^{subframe,\mu}$
5	0.03125	16+ $T_{SMTC_duration} * N_{slot}^{subframe,\mu}$
6	0.015625	32+ $T_{SMTC_duration} * N_{slot}^{subframe,\mu}$

NOTE 1: $T_{SMTC_duration}$ measured in subframes is
- the longest SMTC duration among all above active serving cells and the SCell being activated when one SCell is activated. If SSB configuration (*absoluteFrequencySSB*) but no SMTC configuration is provided for the SCell being activated, the SSB transmission periodicity is assumed to be 5ms and $T_{SMTC\ duration}$ for the SCell being activated is x ms, where x = the number of consecutive subframes containing all SSBs in one SSB burst transmitted by the SCell being activated. If no SSB configuration (*absoluteFrequencySSB*) nor SMTC configuration is provided for the SCell being activated, $T_{SMTC\ duration}$ for the SCell being activated is 0ms;
- the longest SMTC duration among all active serving cells in the same band when one SCell is deactivated.

NOTE 2: $N_{slot}^{subframe,\mu}$ is as defined in TS 38.211 [6].

8.2.4.2.3 Interruptions during measurements on SCC

Interruption on PCell, PSCell and other activated SCell(s) during measurement on the deactivated NR SCC shall meet requirements in clause 8.2.2.2.3, where the term PCell in clause 8.2.2.2.3 shall be deemed to be replaced with SpCell.

8.2.4.2.4 Interruptions at UL carrier RRC reconfiguration

The requirements in this clause shall apply when a supplementary UL carrier or an UL carrier is configured or de-configured in NR-DC as defined in TS 38.331 [2].

When an UL carrier or supplementary UL carrier is configured or de-configured, an interruption of up to the duration shown in table 8.2.4.2.4-1, is allowed during the RRC reconfiguration procedure in TS38.331 [2] on all the other activated serving cells within the same FR as the reconfigured uplink carrier. The interruption is for both uplink and downlink of all the other serving cells within the same FR as the configured or de-configured UL.

Table 8.2.4.2.4-1: Interruption duration for UL carrier RRC reconfiguration

μ	NR Slot length (ms)	Interruption length (slots)
0	1	1
1	0.5	2

2	0.25	4
3	0.125	8
5	0.03125	32
6	0.015625	64

8.2.4.2.5 Interruptions due to Active BWP switching Requirement

The requirements for DCI-based BWP switch, timer-based BWP switch or UL BWP switch triggered by consistent uplink CCA failures in this clause apply to the case that the BWP switch is performed on a single CC or multiple CCs.

When either of the DCI-based, timer-based or RRC-based downlink BWP switch and/or uplink BWP switch occur on multiple CCs simultaneously or over partially overlapping period, the interruption requirements described in this clause apply for each BWP switch.

When UE receives a DCI indicating the UE to switch its active BWP, or when a BWP timer bwp-InactivityTimer defined in TS 38.331 [2] expires, or when the UE receives an RRC command indicating the UE to switch its active BWP or when UL BWP switch is triggered by consistent uplink CCA failures,, the UE is allowed to cause an interruption on any other serving cells as defined in clause 8.2.2.2.5. In addition to what is defined in 8.2.2.5, when RRC-based BWP switch occurs on multiple CCs over partially overlapping period, the interruption is only allowed within the delay $T_{RRCprocessingDelay} + T_{Waiting} + T_{BWPswitchDelayRRC} + D_{RRC}*(M-1)$ as defined in clause 8.6.3A.3. Besides, in asynchronous scenario the UE is allowed an additional interrupt of 1 slot length.

8.2.4.2.6 Interruptions at transitions between active and non-active during DRX

When PCell is in non-DRX and PSCell is in DRX, interruptions on PCell and the activated SCell in MCG if configured due to transitions from active to non-active and from non-active to active during PSCell DRX are allowed with up to 1% probability of missed ACK/NACK when the configured PSCell DRX cycle is less than 640 ms, and 0.625% probability of missed ACK/NACK is allowed when the configured PSCell DRX cycle is 640 ms or longer. Each interruption shall not exceed X slot as defined in table 8.2.4.2.6-1.

When PSCell is in non-DRX and PCell is in DRX, interruptions on PSCell on the activated SCell in SCG if configured due to transitions from active to non-active and from non-active to active during PCell DRX are allowed with up to 1 % probability of missed ACK/NACK when the configured PCell DRX cycle is less than 640 ms, and 0.625% probability of missed ACK/NACK is allowed when the configured PCell DRX cycle is 640 ms or longer. Each interruption shall not exceed X slot as defined in table 8.2.4.2.6-1.

Table 8.2.4.2.6-1: Interruption length X at transition between active and non-active during DRX

μ	NR Slot length (ms)	Interruption length X (slots)	
		Sync	Async
0	1	1	2
1	0.5	1	2
2	0.25	3	
3	0.125	5	
5	0.03125	17	
6	0.015625	33	

When both PCell and PSCell are in DRX, no interruption is allowed.

8.2.4.2.7 Interruptions at transitions from non-DRX to DRX

Interruption on PCell and the activated SCell in MCG if configured due to PSCell transitions from non-DRX to DRX when PCell is in non-DRX shall not exceed X slots as defined in table 8.2.4.2.6-1.

Interruption on PSCell and the activated SCell in SCG if configured due to PCell transitions from non-DRX to DRX when PSCell is in non-DRX shall not exceed X slots as defined in table 8.2.4.2.6-1.

8.2.4.2.8 Interruptions at SCell activation/deactivation with multiple downlink SCells

The requirements in this clause shall apply for the UE configured with NR-DC and up to 1 downlink SCell in FR1 and up to 7 downlink SCell(s) in FR2.

When multiple SCell are activated or deactivated by one single MAC CE command in MCG or SCG:

- an interruption on any serving cell in MCG or SCG is specified as in clause 8.2.4.2.2.

When multiple SCell are activated or deactivated in both MCG and SCG by two MAC CE commands respectively:

- an interruption on any serving cell in MCG is specified as in clause 8.2.4.2.2, and
- an interruption on any serving cell in SCG is specified as in clause 8.2.4.2.2.

8.2.4.2.9 Interruptions at NR SRS carrier based switching

SRS transmission can be configured on a carrier not configured for PUCCH/PUSCH transmission. When a UE needs to transmit periodic, semi-persistent or aperiodic SRS on a carrier of a serving cell not configured for PUCCH/PUSCH transmission, the UE can perform carrier based switching to one or more carriers not configured for PUCCH/PUSCH transmission from a carrier with PUCCH/PUSCH transmission or from a carrier not configured for PUCCH/PUSCH transmission prior to transmitting SRS, provided that:

- switching is from a configured carrier to another activated carrier;
- the carrier of SCells not configured for PUCCH/PUSCH transmission to which SRS carrier based switching is performed is indicated by DCI SRS request field for aperiodic SRS transmission, or indicated by MAC-CE for semi-persistent SRS transmission, or configured via RRC for periodic SRS transmission;
- the serving cell, from which SRS carrier based switching is performed and whose UL transmission may therefore be interrupted, is indicated by srs-SwitchFromServCellIndex and srs-SwitchFromCarrier in TS38.331 [2];
- the SRS switching is not colliding with any other transmission with higher priority defined in TS 38.214 [26].
- the SRS switching is not colliding with any SSB/CSI-RS based L3 measurements and the measurements for RLM/BFD in the same CG.- for UE, which does not support simultaneous reception and transmission for inter-band TDD CA specified in TS 38.331 [2], and is compliant to the requirements for inter-band CA with uplink in one NR band and without simultaneous Rx/Tx specified in TS 38.101-3 [20], the SRS transmission are not simultaneously scheduled with DL SSB/CSI-RS for L3 or L1 measurements transmission on other carriers.

The UE shall not perform SRS carrier based switching if the above conditions cannot be met.

When SRS carrier based switching is performed between carriers, the UE is allowed interruptions on any active serving cell if UE is not capable of Per-FR gap, or on active serving cell(s) in FR1 if UE is capable of Per-FR gap, during the switching to the carrier of a serving cell in FR1 not configured for PUCCH/PUSCH transmission,

- with up to X1 slot as specified in Table 8.2.4.2.9-1.

When SRS carrier based switching is performed between carriers, the UE is allowed interruptions on any active serving cell if UE is not capable of Per-FR gap, or on active serving cell(s) in FR2 if UE is capable of Per-FR gap, during the switching to the carrier of a serving cell in FR2 not configured for PUCCH/PUSCH transmission,

- with up to X2 slot as specified in Table 8.2.4.2.9-2.

When SRS carrier based switching is performed between carriers, the UE is allowed interruptions on any active serving cell if UE is not capable of Per-FR gap, or on active serving cell(s) in FR1 if UE is capable of Per-FR gap, during the switching from the carrier of a serving cell in FR1 not configured for PUCCH/PUSCH transmission,

- with up to X1 slot as specified in Table 8.2.4.2.9-1.

When SRS carrier based switching is performed between carriers, the UE is allowed interruptions on any active serving cell if UE is not capable of Per-FR gap, or on active serving cell(s) in FR2 if UE is capable of Per-FR gap, during the switching from the carrier of a serving cell in FR2 not configured for PUCCH/PUSCH transmission,

- with up to X2 slot as specified in Table 8.2.4.2.9-2.

Table 8.2.4.2.9-1: Interruption length X1 (slot)

μ	NR Slot length (ms) of victim cell	SRS carrier switching time (us)[Note 1]	Interruption length X1 (slots)	
			Sub carrier spacing for agressor cell (kHz)	
			15	30
0	1	≤ 200	2	2
		300, 500	2	2
		900	3	3
1	0.5	≤ 200	3	2
		300, 500	3	3
		900	4	4
2	0.25	≤ 200	4	3
		300, 500	5	4
		900	7	6
3	0.125	≤ 200	7	5
		300, 500	9	7
		900	12	10
5	0.03125	≤ 200	22	15
		300, 500	31	24
		900	44	37
6	0.015625	≤ 200	42	28
		300, 500	61	47
		900	87	73
Note1: NR SRS carrier switching time is UE capability indicated by higher layer parameter *SRS-SwitchingTimeNR*.				

Table 8.2.4.2.9-2: Interruption length X2 (slot)

μ	NR Slot length (ms) of victim cell	SRS carrie switching time (us) [Note 1]	Interruption length X2 (slots)			
			Sub carrier spacing for agressor cell (kHz)			
			60	120	480	960
0	1	≤ 200	2	2	2	2
1	0.5	≤ 200	2	2	2	2
2	0.25	≤ 200	3	3	2	2
3	0.125	≤ 200	4	4	3	3
5	0.03125	≤ 200	11	10	8	8
6	0.015625	≤ 200	21	18	15	15
Note1: NR SRS carrier switching time is UE capability indicated by higher layer parameter *SRS-SwitchingTimeNR*.						

For intra-band SRS carrier switching in FR1or FR2, interruptions in Table 8.2.2.2.9-1 and in Table 8.2.2.2.9-2 based on SRS carrier switching time ≤ 200us shall apply. For inter-band SRS carrier switching in FR1, interruptions in Table 8.2.2.2.9-1 and in Table 8.2.2.2.9-2 shall apply.

8.2.4.2.10 Interruptions at direct SCell activation

When one or multiple SCell(s) are directly activated at SCell addition:

- the UE is allowed an interruption on any active serving cell:
  - of up to the duration shown in Table 8.2.4.2.1-1, if the active serving cell is not in the same band as the SCell being directly activated, where the requriements for Sync apply for synchronous NR-DC, and for asynchronous NR-DC if the active serving cell is in the same CG as the SCell being directly activated, and the requriements for Async apply for asynchronous NR-DC if the active serving cell is not in the same CG as the SCell being directly activated, or

- of up to the duration shown in Table 8.2.4.2.1-2, if the active serving cells are in the same band as the SCell being directly activated provided the cell specific reference signals from the active serving cells and the SCell being directly activated are available in the same slot.

8.2.4.2.11 Interruptions when identifying CGI of an NR cell with autonomous gaps

When a UE is identifying CGI of an NR cell with autonomous gaps, the UE is allowed interruptions on PCell, PSCell or any activated SCell:

- with up to K1 interruptions with interrupted slots up to interruption length X1 specified in Table 8.2.4.2.11-1 for each interruption during MIB decoding time period T_{MIB} (ms) specified in clause 9.11.
- with up to L1 interruptions with interrupted slots up to interruption length Y1 specified in Table 8.2.4.2.11-1 for each interruption during SIB1 decoding time period T_{SIB1} (ms) specified in clause 9.11 for SSB and CORESET for RMSI scheduling multiplexing patterns 1.
- with up to L2 interruptions with interrupted slots up to interruption length Y2 specified in Table 8.2.4.2.11-1 for each interruption during SIB1 decoding time period T_{SIB1} (ms) specified in clause 9.11 for SSB and CORESET for RMSI scheduling multiplexing patterns 2 and 3.

Where:

- K1 = 6 for the target cell carrier frequency on FR1 and K1 = 25 for the target cell carrier frequency on FR2, and
- L1 = $T_{SIB1}/20$, and
- L2 = T_{SIB1}/T_{SMTC}, where T_{SMTC} is the periodicity of the SMTC occasion configured for the target cell carrier.

Table 8.2.4.2.11-1: Interruption length X1, Y1 and Y2 during measurements with autonomous gaps

μ	NR Slot length (ms) of victim cell	Interruption length X1 (slots)	Interruption length Y1 (slots)	Interruption length Y2 (slots)
0	1	6	7	6
1	0.5	12	13	10
2	0.25	24	25	19
3	0.125	48	49	37
5	0.03125	192	193	145
6	0.015625	384	385	289

8.2.4.2.12 Interruptions when identifying CGI of an E-UTRA cell with autonomous gaps

When a UE is identifying CGI of an E-UTRA FDD cell or E-UTRA TDD cell with autonomous gaps, within time period $T_{identify_CGI,\ E\text{-}UTRA}$ specified in clause 9.4.7.1, the UE shall be able to transmit at least the number of ACK/NACKs specified in Table 8.2.4.2.12-1 on PCell, PSCell or any activated SCell in the frequency range where autonomous gaps are used, provided that:

- there is continuous DL data allocation,
- no DRX cycle is used,
- no measurement gaps are configured,
- only one code word is transmitted in each slot,
- 2 slot ACK/NACK feedback is configured,
- 20 ms SMTC period is configured.

Table 8.2.4.2.12-1: Minimum number of ACK/NACKs transmitted by the UE during $T_{identify_CGI,\ E\text{-}UTRA}$

Minimum number of transmitted ACK/NACKs	Configuration of the serving cell in which the transmitted ACK/NACKs are counted	
	Duplex mode configuration	SCS

84	FDD	15 kHz
193	FDD	30 kHz
402	FDD	60 kHz
28	TDD Note 1	15 kHz
81	TDD Note 1	30 kHz
159	TDD Note 1	60 kHz
233	TDD Note 2	60 kHz
491	TDD Note 2	120 kHz
NOTE 1: TDD UL-DL configuration is as specified in Table A.3.3.1-1 of TS 38.101-1 [18]. NOTE 2: TDD UL-DL configuration is as specified in Table A.3.3.1-1 of TS 38.101-2 [19].		

8.2.4.2.13 Interruptions due to SCell dormancy

8.2.4.2.13.1 Interruptions due to SCell dormancy switch

When one SCell in MCG or SCG is switched from dormancy to non-dormancy or from non-dormancy to dormancy [7] when UE is in DRX active time,

- the UE is allowed an interruption on active serving cell in MCG and SCG as defined in clause 8.2.4.2.5, except that the interruption is allowed regardless of which parameters change between the dormant BWP and the non-dormant BWP

- The starting time of interruption shall be within the dormancy switching delay as defined in clause 8.6.2.

When multiple SCells in MCG or SCG are switched from dormancy to non-dormancy or vice versa when the UE is in DRX active time, the interruption requirement described above applies for each BWP switch.

8.2.4.2.13.2 Interruptions due to CQI measurements during SCell dormancy

When one or more SCells are in dormancy, the UE is for the purpose of CQI measurements on the dormant SCell(s) allowed to cause interruptions to non-dormant serving cell(s).

The rate of ACK/NACK feedback loss on any non-dormant serving cell resulting from CQI measurements on dormant SCells shall not exceed 0.5%.

8.2.4.2.13.3 Interruptions due to RRM measurements during SCell dormancy

When one or more SCells are in dormancy, the UE is for the purpose of RRM measurements on the dormant SCell(s) allowed to cause interruptions to non-dormant serving cell(s).

The rate of ACK/NACK feedback loss on any non-dormant serving cell resulting from RRM measurements on dormant SCells shall not exceed 1.0%.

8.2.4.2.14 Interruptions at NR SRS antenna port switching

The requirements in this clause are applicable to SRS antenna port switching on FR1 and SRS resource(s) is only configured within the last 6 symbols of a slot. For interruption caused by SRS antenna port switching, the victim cell is based on the entry number of the band indicated by *txSwitchImpactToRx* and/or *txSwitchWithAnotherBand* regardless of per-FR MG capability. An UL interruption is allowed on any of the serving cells as indicated in *txSwitchWithAnotherBand*, and a DL interruption is allowed on any of the serving cells as indicated in *txSwitchImpactToRx*..

The UE shall perform SRS antenna port switching only if the below conditions are met.

- the SRS switching is not colliding with any other UL transmission with higher priority defined in TS 38.214 [26] if the serving cell on which the higher priority transmission is performed is a victim cell based on *txSwitchWithAnotherBand* or is the same carrier on which SRS is transmitted.

- the SRS switching is not colliding with any NR measurements (i.e. SSB/CSI-RS based L1/L3 measurements) and the measurements for RLM/BFD/CBD if the serving cell on which the NR measurements and the measurements for RLM/BFD/CBD is performed is a victim cell based on *txSwitchImpactToRx* or is the same carrier on which SRS is transmitted.

No requirements are defined for SRS antenna port switching if aperiodic SRS switching is colliding with aperiodic L1-RSRP/L1-SINR measurements and the serving cell on which the aperiodic L1-RSRP/L1-SINR measurement is configured is indicated in *txSwitchImpactToRx* or is the same carrier on which aperiodic SRS is scheduled/configured.

When 1 SRS symbol is configured in a slot for SRS antenna switching and the aggressor and victim cells are synchronized, the interruption requirement in Table 8.2.4.2.14-1 applies. When 1 SRS symbol is configured in a slot for SRS antenna switching and the aggressor and victim cells are asynchronized, the interruption requirement in Table 8.2.4.2.14-2 applies. For the rest of SRS configurations, the interruption requirement in Table 8.2.4.2.14-3 applies.

Table 8.2.4.2.14-1: Interruption length in symbols of victim CC when 1 SRS symbol is configured, and aggressor and victim cells are synchronized

Victim cell SCS(kHz)	Aggressor cell SCS (kHz)		
	15	30	60
15	3	2	2
30	4	3	3
60	8	6	5
120	14	10	8

Table 8.2.4.2.14-2: Interruption length in slots of victim CC when 1 SRS symbol is configured, and aggressor and victim cells are asynchronized

Victim cell SCS(kHz)	Aggressor cell SCS (kHz)		
	15	30	60
15	2	2	2
30	2	2	2
60	2	2	2
120	2	2	2

Table 8.2.4.2.14-3: Interruption length in slots of victim CC for rest of the SRS configurations for synchronised and asynchronized scenarios

Victim cell SCS(kHz)	Aggressor cell SCS (kHz)		
	15	30	60
15	2	2	2
30	2	2	2
60	3	2	2
120	5	3	3

8.2.4.2.15 Interruptions at fast SCell activation

The requirements in this clause shall apply for the UE configured with one SCell when aperiodic CSI-RS resources is configured for fast SCell activation.

When one SCell in MCG or SCG is activated from deactivated, and aperiodic CSI-RS resources is configured for fast SCell activation, the UE is allowed.

- an interruption on any active serving cell:
  - of up to the duration shown in table 8.2.4.2.2-1, if the active serving cell is not in the same band as the SCell being activated, where the requriements for Sync apply for synchronous NR-DC, and for asynchronous NR-DC if the active serving cell is in the same CG as the SCell being activated, and the requriements for Async apply for asynchronous NR-DC if the active serving cell is not in the same CG as the SCell being activated, or
  - of up to Y2 slots + $T_{ATRS_duration}$ if the active serving cells are in the same band as the SCell being activated, when

- SCell to be activated is known and belongs to FR1, if the measurement period of the SCell being activated is larger than [2400ms], or
- SCell is unknown and belongs to FR1, and SCell is contiguous to an active serving cell in the same band

- of up to Y2 slot if the active serving cells are in the same band as any of the SCells being activated, when
  - SCell to be activated is known and belongs to FR1, if the measurement period of the SCell being activated is equal to or smaller than [2400ms], or

- SCell to be activated belongs to FR2

Where

- $T_{ATRS_duration}$ is CSI-RS burst for SCell activation where the CSI-RS burst is defined as four CSI-RS resources in two consecutive slots on the being activated SCell.
- Y2 are specified in Table 8.2.3.2.4-2.

8.2.4.2.16 Interruptions at SCG activation/deactivation

When SCG is activated or deactivated using an *RRCConnectionReconfiguration* message as defined in TS 38.331 [2], the UE is allowed an interruption on any activated serving cell in MCG during the RRC reconfiguration procedure as follows:

- an interruption on any active serving cell in MCG:
  - of up to the duration shown in table 8.2.4.2.16-1, if the active serving cell is not in the same band as the PSCell being activated or deactivated, where the requriements for Sync apply for synchronous NR-DC. The requriements for Async apply for asynchronous NR-DC.

Table 8.2.4.2.16-1: Interruption duration for SCG activation/deactivation for inter-band DC/CA

μ	NR Slot length (ms) of victim cell	Interruption length (slots)		
		Sync		Async
0	1	[1]		[2]
1	0.5	[2]		[3]
2	0.25	Both aggressor cell and victim cell are on FR2	[4]	[5]
		Either aggressor cell or victim cell is on FR1	[5]	
3	0.125	Aggressor cell is on FR2	[8]	[9]
		Aggressor cell is on FR1	[9]	

8.2.4.2.17 Interruptions due to RRM measurements on deactivated SCG

If the UE is not configured with RLM or BFD on the deactivated PSCell, interruptions on PCell or activated SCell(s) due to measurements on the deactivated PSCell are allowed with up to 0.5% probability of missed ACK/NACK feedback when the configured *measCyclePSCell* is 640ms or longer. The UE is only allowed to cause interruptions on PCell or activated SCell(s) immediately before and immediately after an SMTC. Each interruption shall not exceed requirement in Table 8.2.2.2.2-1.

If the UE is configured with RLM or BFD on the deactivated PSCell, the rate of ACK/NACK feedback loss on any active serving cell resulting from RRM measurements on the deactivated PSCell shall not exceed 1.0%.

8.2.4.2.18 Interruptions during RLM/BFD measurements on deactivated PScell

When PSCell is configured with *bfd-and-RLM* with value *true*, if NR PScell is deactivated, the UE is for the purpose RLM/BFD measurements on the deactivated PSCell allowed to cause interruptions to activated serving cell(s) which can either be Pcell or Scell in MCG.

The rate of ACK/NACK feedback loss on any activated serving cell resulting from RLM/BFD measurements on deactivated PSCell shall not exceed 0.5%.

8.2.4.2.19 Interruptions due to UE-specific CBW change

The requirements in clause 8.2.2.2.8 apply for this clause.

8.2.4.2A Void

8.2.4.2A.1 Void

8.2.4.2A.2 Void

8.2.4.2A.3 Void

8.3 SCell Activation and Deactivation Delay

8.3.1 Introduction

This clause defines requirements for the delay within which the UE shall be able to activate a deactivated SCell and deactivate an activated SCell in EN-DC, or in standalone NR carrier aggregation, or in NE-DC, or in NR-DC.

The requirements shall apply for EN-DC, standalone NR carrier aggregation, NE-DC, and NR-DC.

8.3.2 SCell Activation Delay Requirement for Deactivated SCell

The requirements in this clause shall apply for the UE configured with one downlink SCell in EN-DC, or in standalone NR carrier aggregation or in NE-DC or in NR-DC and when one SCell is being activated.

The delay within which the UE shall be able to activate the deactivated SCell depends upon the specified conditions.

Upon receiving SCell activation command in slot *n*, the UE shall be capable to transmit valid CSI report and apply actions related to the activation command for the SCell being activated no later than in slot n + $\frac{T_{HARQ}+T_{activation_time}+T_{CSI_Reporting}}{NR\ slot\ length}$, where:

T_{HARQ} (in ms) is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [3]

$T_{activation_time}$ is the SCell activation delay in millisecond.

If the SCell is known and belongs to FR1, $T_{activation_time}$ is:

- $T_{FirstSSB}$+ 5ms, if the measurement period of the SCell being activated is equal to or smaller than 2400ms.
- $T_{FirstSSB_MAX}$ + T_{rs} + 5ms, if the measurement period of the SCell being activated is larger than 2400ms.

If the SCell is unknown and belongs to FR1, and if one of the following conditions is met

- ‘ssb-PositionInBurst’ indicates only one SSB is being actually transmitted, or

- 'ssb-PositionInBurst' indicates multiple SSBs and TCI indication is provided in same MAC PDU with SCell activation,

provided that the side condition Ês/Iot ≥ -2dB is fulfilled, $T_{activation_time}$ is:

- $T_{FirstSSB_MAX} + T_{SMTC_MAX} + T_{rs}$ + 5ms, if the following conditions are met,
  - the SCell is contiguous to an active serving cell in the same band, and
  - its *ssb-PositionInBurst* is same as the one of contiguous FR1 active serving cell, and
  - its SMTC offset is same as the one of contiguous FR1 active serving cell, and
  - its RTD with contiguous FR1 active serving cell is smaller than or equal to 260ns with respect to the to-be-activated SCell's SSB numerology, and its reception power difference with contiguous FR1 active serving cell is smaller than or equal to 6dB;
- $T_{FirstSSB_MAX} + T_{SMTC_MAX} + 2*T_{rs}$ + 5ms, otherwise.

otherwise, provided that the side condition Ês/Iot ≥ -2dB is fulfilled, $T_{activation_time}$ is:

- 6ms + $T_{FirstSSB_MAX} + T_{SMTC_MAX} + T_{rs} + T_{L1\text{-}RSRP,measure} + T_{L1\text{-}RSRP,report} + T_{HARQ}$ + max($T_{uncertainty_MAC} + T_{FineTiming}$ + 2ms, $T_{uncertainty_SP}$), if semi-persistent CSI-RS is used for CSI reporting,
- 3ms + $T_{FirstSSB_MAX} + T_{SMTC_MAX} + T_{rs} + T_{L1\text{-}RSRP,measure} + T_{L1\text{-}RSRP,report}$ + max($T_{HARQ} + T_{uncertainty_MAC}$ + 5ms + $T_{FineTiming}$, $T_{uncertainty_RRC} + T_{RRC_delay}$), if periodic CSI-RS is used for CSI reporting.

- However, when the following conditions are fulfilled, no activation requirement will be applied for this unknown SCell:
  - the SCell is contiguous to an active serving cell in the same band, and
  - A single SSB is used in the unknown SCell; or multiple SSBs are used in the SCell and TCI state indication for PDCCH is provided by the same MAC PDU used for SCell activation; and
  - its *ssb-PositionInBurst* is same as the one of contiguous FR1 active serving cell, and
  - its SMTC offset is same as the one of contiguous FR1 active serving cell
  - its RTD with contiguous FR1 active serving cell is larger than 260ns with respect to the to-be-activated SCell's SSB numerology, or its reception power difference with contiguous FR1 active serving cell is larger than 6dB;

If the SCell being activated belongs to FR1 and if there is at least one active serving cell contiguous to the SCell on that FR1 band, if the UE is not provided with SSB configuration (*absoluteFrequencySSB*) nor SMTC configuration for the target SCell, $T_{activation_time}$ is 3 ms for UE supporting *scellWithoutSSB*, provided

- The RTD between the target SCell and the contiguous active serving cell is within within ±260ns, and
- The difference of the reception power with the contiguous active serving cell is <= 6dB, and
- The RS(s) of SCell being activated is (are) QCL-TypeA with TRS(s) of the SCell being activated, and the TRS(s) of the SCell being activated is (are) further QCL-TypeC with SSB(s) of any active serving cell that is contiguous to the SCell being activated on that FR1 band.

If the SCell being activated belongs to FR2 and if there is at least one active serving cell on that FR2 band, then $T_{activation_time}$ is $T_{FirstSSB}$+ 5ms provided:

- The UE is provided with SMTC for the target SCell, and
- The SSBs in the serving cell(s) and the SSBs in the SCell fulfil the condition defined in clause 3.6.3,
- The parameter ssb-PositionsInBurst is same for the serving cell(s) and the SCell.
- SSB is in the same half-frame on the SCell and the contiguous FR2 active serving cell

If the SCell being activated belongs to FR2 and if there is at least one active serving cell on that FR2 band, if the UE supporting *scellWithoutSSB* is not provided with any SMTC for the target SCell, $T_{activation_time}$ is 3 ms, provided

- the RS (s) of SCell being activated is (are) QCL-TypeD with RS (s) of one active serving cell on that FR2 band.

If the SCell being activated belongs to FR2 and if there is no active serving cell on that FR2 band provided that PCell or PSCell is in FR1 or in FR2:

If the target SCell is known to UE and semi-persistent CSI-RS is used for CSI reporting, then $T_{activation_time}$ is:

- $3ms + \max(T_{uncertainty_MAC} + T_{FineTiming} + 2ms, T_{uncertainty_SP})$, where $T_{uncertainty_MAC}=0$ and $T_{uncertainty_SP}=0$ if UE receives the SCell activation command, semi-persistent CSI-RS activation command and TCI state activation command at the same time.

If the target SCell is known to UE and periodic CSI-RS is used for CSI reporting, then $T_{activation_time}$ is:

- $\max(T_{uncertainty_MAC} + 5ms + T_{FineTiming}, T_{uncertainty_RRC} + T_{RRC_delay} - T_{HARQ})$, where $T_{uncertainty_MAC}=0$ if UE receives the SCell activation command and TCI state activation commands at the same time.

If the PCell/PSCell and the target SCell are configured as FR1-FR2-1 CA or if the PCell/PSCell and the target SCell are in a FR2-1 band pair with independent beam management, and the target SCell is unknown to UE and semi-persistent CSI-RS is used for CSI reporting, provided that the side condition $\hat{E}s/Iot \geq -2dB$ is fulfilled, then $T_{activation_time}$ is:

- $6ms + T_{FirstSSB_MAX} + 15*T_{SMTC_MAX} + 8*T_{rs} + T_{L1\text{-}RSRP,\ measure} + T_{L1\text{-}RSRP,\ report} + T_{HARQ} + \max(T_{uncertainty_MAC} + T_{FineTiming} + 2ms, T_{uncertainty_SP})$.

If the PCell/PSCell and the target SCell are configured as FR1-FR2-2 CA or if the PCell/PSCell and the target SCell are in a FR2-2 band pair with independent beam management, and the target SCell is unknown to UE and semi-persistent CSI-RS is used for CSI reporting, provided that the side condition $\hat{E}s/Iot \geq -2dB$ is fulfilled, then $T_{activation_time}$ is:

- $6ms + T_{FirstSSB_MAX} + 23*T_{SMTC_MAX} + 12*T_{rs} + T_{L1\text{-}RSRP,\ measure} + T_{L1\text{-}RSRP,\ report} + T_{HARQ} + \max(T_{uncertainty_MAC} + T_{FineTiming} + 2ms, T_{uncertainty_SP})$.

If the PCell/PSCell and the target SCell are configured as FR1-FR2-1 CA or if the PCell/PSCell and the target SCell are in a FR2-1 band pair with independent beam management, and the target SCell is unknown to UE and periodic CSI-RS is used for CSI reporting, provided that the side condition $\hat{E}s/Iot \geq -2dB$ is fulfilled, then $T_{activation_time}$ is:

- $3ms + T_{FirstSSB_MAX} + 15*T_{SMTC_MAX} + 8*T_{rs} + T_{L1\text{-}RSRP,\ measure} + T_{L1\text{-}RSRP,\ report} + \max\{(T_{HARQ} + T_{uncertainty_MAC} + 5ms + T_{FineTiming}), (T_{uncertainty_RRC} + T_{RRC_delay})\}$.

If the PCell/PSCell and the target SCell are configured as FR1-FR2-2 CA or if the PCell/PSCell and the target SCell are in a FR2-2 band pair with independent beam management, and the target SCell is unknown to UE and periodic CSI-RS is used for CSI reporting, provided that the side condition $\hat{E}s/Iot \geq -2dB$ is fulfilled, then $T_{activation_time}$ is:

- $3ms + T_{FirstSSB_MAX} + 23*T_{SMTC_MAX} + 12*T_{rs} + T_{L1\text{-}RSRP,\ measure} + T_{L1\text{-}RSRP,\ report} + \max\{(T_{HARQ} + T_{uncertainty_MAC} + 5ms + T_{FineTiming}), (T_{uncertainty_RRC} + T_{RRC_delay})\}$.

where,

T_{SMTC_MAX}:

- In FR1, in case of intra-band SCell activation, T_{SMTC_MAX} is the longer SMTC periodicity between active serving cells and SCell being activated provided the cell specific reference signals from the active serving cells and the SCells being activated or released are available in the same slot; in case of inter-band SCell activation, T_{SMTC_MAX} is the SMTC periodicity of SCell being activated.

- In FR2, in case of intra-band SCell activation, T_{SMTC_MAX} is the longer SMTC periodicity between active serving cells and SCell being activated provided that in Rel-15 only support FR2 intra-band CA; in case of FR2 inter-band SCell activation, T_{SMTC_MAX} is the SMTC periodicity of SCell being activated.

- T_{SMTC_MAX} is bounded to a minimum value of 10ms.

T_{rs} is the SMTC periodicity of the SCell being activated if the UE has been provided with an SMTC configuration for the SCell in SCell addition message, otherwise T_{rs} is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the measObjectNRs having the same SSB frequency and subcarrier spacing configured by MN and SN have different SMTC, Trs is the periodicity of one of the SMTC which is up to UE implementation. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement which involves T_{rs} is applied with T_{rs} = 5ms assuming the SSB transmission periodicity is 5ms. There are no requirements if the SSB transmission periodicity is not 5ms

$T_{FirstSSB}$: is the time to the end of the first complete SSB burst indicated by the SMTC, or within 5ms if SMTC is not configured, after slot n + $\frac{T_{HARQ}+3ms}{NR\ slot\ length}$.

$T_{FirstSSB_MAX}$: Is the time to the end of the first complete SSB burst indicated by the SMTC, or within 5ms if SMTC is not configured, after slot n + $\frac{T_{HARQ}+3ms}{NR\ slot\ length}$, further fulfilling:

- In FR1, in case of intra-band SCell activation, the occasion when all active serving cells and SCells being activated or released are transmitting SSB bursts in the same slot; in case of inter-band SCell activation, the first occasion when the SCell being activated is transmitting SSB burst.

- In FR2, the occasion when all active serving cells and SCells being activated or released are transmitting SSB bursts in the same slot.

$T_{FineTiming}$ is the time period between UE finish processing the last activation command for PDCCH TCI, PDSCH TCI (when applicable) and the timing of first complete available SSB corresponding to the TCI state.

$T_{L1\text{-}RSRP,\ measure}$ is L1-RSRP measurement delay $T_{L1\text{-}RSRP_Measurement_Period_SSB}$ ms or $T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS}$ based on applicability as defined in clause 9.5 assuming M=1 and T_{Report}=0.

$T_{L1\text{-}RSRP,\ report}$ is delay of acquiring CSI reporting resources.

$T_{uncertainty_MAC}$ is the time period between reception of the last activation command for PDCCH TCI, PDSCH TCI (when applicable) relative to

- SCell activation command for known case;

- First valid L1-RSRP reporting for unknown case.

$T_{uncertainty_RRC}$ is the time period between reception of the RRC configuration message for TCI of periodic CSI-RS for CQI reporting (when applicable) relative to

- SCell activation command for known case;

- First valid L1-RSRP reporting for unknown case.

$T_{uncertainty_SP}$ is the time period between reception of the activation command for semi-persistent CSI-RS resource set for CQI reporting relative to

- SCell activation command for known case;

- First valid L1-RSRP reporting for unknown case.

T_{RRC_delay} is the RRC procedure delay as specified in TS38.331 [2].

Longer delays for RRM measurement requirements, and in case of FR2 also SSB based RLM/BFD/CBD/L1-RSRP measurement requirements, can be expected during the cell detection time for unknown SCell activation.

When *absoluteFrequencySSB* is not configured in *DownlinkConfigCommon* for target SCell but SMTC for target SCell is configured, no requirement would be applied.

$T_{CSI_reporting}$ is the delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2].

SCell in FR1 is known if it has been meeting the following conditions:

- During the period equal to max(5*measCycleSCell, 5*DRX cycles) for FR1 before the reception of the SCell activation command:
  - the UE has sent a valid measurement report for the SCell being activated and
  - the SSB measured remains detectable according to the cell identification conditions specified in clause 9.2 and 9.3.
- the SSB measured during the period equal to max(5*measCycleSCell, 5*DRX cycles) also remains detectable during the SCell activation delay according to the cell identification conditions specified in clause 9.2 and 9.3.

Otherwise SCell in FR1 is unknown.

For the first SCell activation in FR2 bands, the SCell is known if it has been meeting the following conditions:

- During the period equal to 4s for UE supporting power class 1/5 and 3s for UE supporting power class 2/3/4 before UE receives the last activation command for PDCCH TCI, PDSCH TCI (when applicable) and semi-persistent CSI-RS for CQI reporting (when applicable):
  - the UE has sent a valid L3-RSRP measurement report with SSB index
  - SCell activation command is received after L3-RSRP reporting and no later than the time when UE receives MAC-CE command for TCI activation
- During the period from L3-RSRP reporting to the valid CQI reporting, the reported SSBs with indexes remain detectable according to the cell identification conditions specified in clauses 9.2 and 9.3, and the TCI state is selected based on one of the latest reported SSB indexes.

Otherwise, the first SCell in FR2 band is unknown. The requirement for unknown SCell applies provided that the activation commands for PDCCH TCI, PDSCH TCI (when applicable), semi-persistent CSI-RS for CQI reporting (when applicable), and configuration message for TCI of periodic CSI-RS for CQI reporting (when applicable) are based on the latest valid L1-RSRP reporting.

If the UE has been provided with higher layer in TS 38.331 [2] signaling of *smtc2* prior to the activation command, T_{SMTC_Scell} follows *smtc1* or *smtc2* according to the physical cell ID of the target cell being activated. T_{SMTC_MAX} follows *smtc1* or *smtc2* according to the physical cell IDs of the target cells being activated and the active serving cells.

In addition to CSI reporting defined above, UE shall also apply other actions related to the activation command specified in TS 38.331 [2] for a SCell at the first opportunities for the corresponding actions once the SCell is activated.

The starting point of an interruption window on spCell or any activated SCell, as specified in clause 8.2, shall not occur before slot n+1+$\frac{T_{HARQ}}{NR\ slot\ length}$ and not occur after slot slot n+1+$\frac{T_{HARQ}+3ms+T_X}{NR\ slot\ length}$, where NR slot length is with respect to the numerology used in the SCell being activated, and T_X is:

- 0, if $T_{activation_time}$ is 3ms;
- $T_{FirstSSB}$, for any scenario where $T_{activation_time}$ includes $T_{FirstSSB}$;
- $T_{FirstSSB_MAX}$, for any scenario where $T_{activation_time}$ includes $T_{FirstSSB_MAX}$;
- $T_{uncertainty_MAC}$ +$T_{FineTiming}$, for any scenario where $T_{activation_time}$ includes only $T_{FineTiming}$ and no $T_{FirstSSB_MAX}$.

The length of the interruption window may be different for different victim cells, and depends on the applicable scenario and on the frequency band relation between the aggressor cell and the victim cell.

The requirements in this clause and requriements on interruption due to SCell activation in clause 8.2 apply provided that the SSB of the to-be-activated SCell is within the first active DL BWP of the Scell.

Starting from the slot specified in clause 4.3 of TS 38.213 [3] (timing for secondary Cell activation/deactivation) and until the UE has completed the SCell activation, the UE shall report out of range if the UE has available uplink resources to report CQI for the SCell.

Starting from the slot specified in clause 4.3 of TS 38.213 [3] (timing for secondary Cell activation/deactivation) and until the UE has completed a first L1-RSRP measurement, the UE shall report lowest valid L1 SS-RSRP range if the UE has available uplink resources to report L1-RSRP for the SCell.

8.3.3 SCell Deactivation Delay Requirement for Activated SCell

The requirements in this clause shall apply for the UE configured with one downlink SCell in EN-DC, or in standalone NR carrier aggregation, or in NE-DC, or in NR-DC.

Upon receiving SCell deactivation command in slot *n*, the UE shall accomplish the deactivation actions for the SCell being deactivated no later than in slot $n + \frac{T_{HARQ}+3ms}{NR\ slot\ length}$. The starting point of an interruption window on spCell or any activated SCell, as specified in clause 8.2, shall not occur before slot n+1+$\frac{T_{HARQ}}{NR\ slot\ length}$ and not occur after slot n+1+$\frac{T_{HARQ}+3ms}{NR\ slot\ length}$, where NR slot length is with respect to the numerology used in the SCell being deactivated.

Upon expiry of the *sCellDeactivationTimer* in slot *n*, the UE shall accomplish the deactivation actions for the SCell being deactivated no later than in slot $n + \frac{3ms}{NR\ slot\ length}$. The starting point of an interruption window on spCell or any activated SCell, as specified in clause 8.2, shall not occur before slot n+1 and not occur after slot n+1+ $\frac{3ms}{NR\ slot\ length}$, where NR slot length is with respect to the numerology used in the SCell being deactivated.

The length of the interruption window may be different for different victim cells, and depends on the applicable scenario and on the frequency band relation between the aggressor cell and the victim cell.

8.3.4 Direct SCell Activation at SCell addition

The requirements in this clause apply for UE being configured in the RRC reconfiguration message, TS 38.331 [2], with one SCell for which the parameter *sCellState* is set to *activated*. If the RRC reconfiguration message for direct SCell activation also configures PSCell addition or PSCell change, the direct SCell activation delay may be longer than the requirements defined in this clause.

If the RRC reconfiguration message for direct SCell activation also configures TCI state information, the requirements in section 8.3.2 based on that TCI state activation command is received at the same time as SCell activation command shall apply.

The UE shall configure the SCell in activated state upon successful completion of the RRC reconfiguration procedure within the specified delay. The UE shall be capable to transmit valid CSI report and apply actions for the directly activated SCell no later than in slot n + $\frac{N_{direct}}{NR\ slot\ length}$,

where:

- Slot n is the last slot overlapping with the PDSCH containing the RRC reconfiguration message,
- $N_{direct} = T_{RRC_Process} + T_1 + T_{activation_time} + T_{CSI_Reporting}$ - 3ms for the cases specified in clause 8.3.2 that TCI state is not indicated within $T_{activation_time}$; otherwise, $N_{direct} = T_{RRC_Process} + T_1 + T_{HARQ} + T_{activation_time} + T_{CSI_Reporting}$
  - $T_{RRC_Process}$: RRC procedure delay as specified in clause 11.2 of TS 36.331 [16] if the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the RRC procedure delay defined in clause 12 of TS 38.331 [2],
  - T_1: Delay from slot $n + \frac{T_{RRC_Process}}{NR\ slot\ length}$ until the transmission of *RRCReconfigurationComplete* message,

Note: T_1 is UE implementation dependent.

T_{HARQ} (in ms) is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [3],

If the SCell is known and belongs to FR1, $T_{CSI_Reporting}$ is specified in clause 8.3.2 and $T_{activation_time}$ is defined as:

- $T_{FirstSSB}$+ 5ms, if the measurement period of the SCell being activated is equal to or smaller than 2400ms.
- $T_{FirstSSB_MAX}$ + T_{rs} + 5ms, if measurement period of the SCell being activated is larger than 2400ms.

  where,

  the measurement period in Table 9.2.5.2-1 applies if the target SCell was in an intra-frequency layer corresponding to an activated SCell;

  the measurement period in Table 9.2.5.2-3 applies if the target SCell was in an intra-frequency layer corresponding to a deactivated SCell;

  the measurement period in Table 9.3.5-1 applies if the target SCell was in an inter-frequency layer.

- Otherwise, $T_{activation_time}$ and $T_{CSI_Reporting}$ are specified in clause 8.3.2, where the following definitions of $T_{FirstSSB}$ and $T_{FirstSSB_MAX}$ shall override the existing ones:
  - $T_{FirstSSB}$: the time to the end of the first complete SSB burst indicated by the SMTC after slot n + $\frac{T_{RRC_Process}+T_1}{NR\ slot\ length}$
  - $T_{FirstSSB_MAX}$: the time to the end of the first complete SSB burst indicated by the SMTC after slot n + $\frac{T_{RRC_{Process}}+T_1}{NR\ slot\ length}$
    - In FR1, in case of intra-band SCell activation, the occasion when all active serving cells and SCells being activated or released are transmitting SSB bursts in the same slot; in case of inter-band SCell activation, the first occasion when the SCell being activated is transmitting SSB burst.
    - In FR2, the occasion when all active serving cells and SCells being activated or released are transmitting SSB bursts in the same slot.

In addition to CSI reporting defined above, UE shall also apply other actions related to the activation command specified in TS38.321 [7] for an SCell at the first opportunities for the corresponding actions once the SCell is activated.

The SCell is known provided the following conditions are met for the SCell:

- During the last 5 seconds before the reception of the direct SCell configuration command:
  - the UE has sent a valid measurement report for the SCell being directly activated, and
  - the SSB measured remains detectable according to the cell identification conditions specified in sections 9.2 and 9.3,
- the SSB measured during the period equal to [5] seconds also remains detectable during the SCell activation delay according to the cell identification conditions specified in clause 9.2 and 9.3.

Otherwise, the SCell is unknown.

The UE may be allowed to cause interruptions to serving cells on other component carriers during an interruption window, as specified in clause 8.2. The starting point of an interruption window on spCell or any activated SCell shall not occur before slot n+1, and shall not occur after slot $n+1+\frac{T_{RRC_Process}+T_1+T_X}{NR\ slot\ length}$, where NR slot length is with respect to the numerology of the SCell being activated, and T_X is:

- $T_{FirstSSB}$, for any scenario where $T_{activation_time}$ includes $T_{FirstSSB}$;
- $T_{FirstSSB_MAX}$, for any scenario where $T_{activation_time}$ includes $T_{FirstSSB_MAX}$;
- $T_{uncertainty_MAC}$ +$T_{FineTiming}$, for any scenario where $T_{activation_time}$ includes $T_{FineTiming}$.

The length of the interruption window may be different for different victim cells, and depends on the applicable scenario and on the frequency band relation between the aggressor cell and the victim cell.

Starting from the slot $n + \frac{T_{RRC_Process} + T_1}{NR\ slot\ length}$ until the UE has completed the direct SCell activation, the UE shall report CQI index = 0 (out of range) if the UE has available uplink resources to report CQI for the SCell.

8.3.5 Direct SCell Activation at Handover

The requirements in this clause apply for UE being configured in the RRC reconfiguration message, TS 38.331 [2], for handover with one SCell for which the parameter *sCellState* is set to *activated*.

The UE shall configure the SCell in activated state upon successful completion of the RRC reconfiguration procedure within the specified delay. The UE shall be capable to transmit valid CSI report and apply actions for the directly activated SCell no later than in slot n + $\frac{N_{direct}}{NR\ slot\ length}$,

Where:

- Slot n is the last slot overlapping with the PDSCH containing RRC reconfiguration message.
- $N_{direct} = T_{RRC_process} + T_{interrupt} + T_2 + T_3 + T_{activation_time} + T_{CSI_Reporting}$ - 3ms for the cases specified in clause 8.3.2 that TCI state is not indicated within $T_{activation_time}$; otherwise, $N_{direct} = T_{RRC_process} + T_{interrupt} + T_2 + T_3 + T_{HARQ} + T_{activation_time} + T_{CSI_Reporting}$
- $T_{RRC_Process}$: RRC procedure delay as specified in clause 11.2 of TS 36.331 [16] if the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the RRC procedure delay defined in clause 12 of TS 38.331 [2],
- $T_{interrupt}$: Interruption time during handover as specified in clause 6.1.1,
- T_2: Delay from slot $n + \frac{T_{RRC_Process} + T_{interrupt}}{NR\ slot\ length}$ until UE has obtained a valid TA command for the target PCell,
- T_3: Delay for applying the received TA for uplink transmission in the target PCell, and greater than or equal to k+1 slot, where k is defined in clause 4.2 in TS 38.213,
- T_{HARQ} (in ms) is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [3],
- If the SCell is known and belongs to FR1, $T_{CSI_Reporting}$ is specified in clause 8.3.2 and $T_{activation_time}$ is defined as:
  - $T_{FirstSSB}$+ 5ms, if the measurement period of the SCell being activated is equal to or smaller than [2400ms].
  - $T_{FirstSSB_MAX} + T_{rs}$ + 5ms, if measurement period of the SCell being activated is larger than [2400ms].

    where,

    the measurement period in Table 9.2.5.2-1 applies if the target SCell was in an intra-frequency layer corresponding to an activated SCell;

    the measurement period in Table 9.2.5.2-3 applies if the target SCell was in an intra-frequency layer corresponding to a deactivated SCell;

    the measurement period in Table 9.3.5-1 applies if the target SCell was in an inter-frequency layer.
- Otherwise, $T_{activation_time}$ and $T_{CSI_Reporting}$ are specified in clause 8.3.2, where the following definitions of $T_{FirstSSB}$ and $T_{FirstSSB_MAX}$ shall override the existing ones:
  - $T_{FirstSSB}$: the time to the end of the first complete SSB burst indicated by the SMTC after slot n + $\frac{T_{RRC_Process} + T_{interrupt} + T_2 + T_3}{NR\ slot\ length}$
  - $T_{FirstSSB_MAX}$: the time to the end of the first complete SSB burst indicated by the SMTC after slot n + $\frac{T_{RRC_{Process}} + T_{interrupt} + T_2 + T_3}{NR\ slot\ length}$
    - In FR1, in case of intra-band SCell activation, the occasion when all active serving cells and SCells being activated or released are transmitting SSB bursts in the same slot; in case of inter-band SCell activation, the first occasion when the SCell being activated is transmitting SSB burst.

- In FR2, the occasion when all active serving cells and SCells being activated or released are transmitting SSB bursts in the same slot.

In addition to CSI reporting defined above, UE shall also apply other actions related to the activation command specified in TS 38.321 [7] for an SCell at the first opportunities for the corresponding actions once the SCell is activated.

The SCell is known provided the following conditions are met for the SCell:

- During the last 5 seconds before the reception of the direct SCell configuration command:
  - the UE has sent a valid measurement report for the SCell being directly activated, and
  - the SSB measured remains detectable according to the cell identification conditions specified in sections 9.2 and 9.3,
  - the SSB measured during the period equal to [5] seconds also remains detectable during the SCell activation delay according to the cell identification conditions specified in clause 9.2 and 9.3.

Otherwise, the SCell is unknown.

The UE may be allowed to cause interruptions to PCell during an interruption window, as specified in clause 8.2. The starting point of an interruption window on PCell shall not occur before slot n+1+ $\frac{T_{RRC\ Processing}+T_{interrupt}+T_2+T_3}{NR\ slot\ length}$, and not occur after slot n+1+$\frac{T_{RRC\ Processing}+T_{interrupt}+T_2+T_3+T_X}{NR\ slot\ length}$, where NR slot length is with respect to the numerology of the SCell being activated, and T_X is:

- $T_{FirstSSB}$, for any scenario where $T_{activation_time}$ includes $T_{FirstSSB}$;
- $T_{FirstSSB_MAX}$, for any scenario where $T_{activation_time}$ includes $T_{FirstSSB_MAX}$;
- $T_{uncertainty_MAC}$ +$T_{FineTiming}$, for any scenario where $T_{activation_time}$ includes $T_{FineTiming}$.

The length of the interruption window depends on the frequency band relation between the aggressor SCell and the victim PCell.

Starting from the slot $n + \frac{T_{RRC_Process} + T_{interrupt}+T_2+ T_3}{NR\ slot\ length}$ and until the UE has completed the direct SCell activation, the UE shall report CQI index = 0 (out of range) if the UE has available uplink resources to report CQI for the SCell.

8.3.6 Direct SCell Activation at RRCResume

The requirements in this clause apply for UE being configured in the RRC reconfiguration message in TS38.331 [2] for RRC Resume with one SCell for which the parameter *sCellState* is set to *activated*.

The requirements in clause 8.3.4 shall apply, except that the definition of T_1 shall be deemed to be replaced with

T_1: Delay from slot $n + \frac{T_{RRC_Process}}{NR\ slot\ length}$ until the transmission of RRCResumeComplete message,

8.3.7 SCell Activation Delay Requirement for Deactivated SCell with Multiple Downlink SCells

The requirements in this clause shall apply for the UE configured with more than one SCells.

In EN-DC, NE-DC, standalone NR, or in one CG of NR-DC, the requirements in this clause shall apply when the following conditions are met:

- UE only receives one single MAC command for multiple SCell activation within the activation period defined in this clause
- in each single CG, there are no other SCell activation, deactivation, addition or release before activation is completed for all the SCells activated by the single MAC CE in this clause, and

- in EN-DC and NE-DC, there are no E-UTRAN SCell activation, deactivation, addition or release before multiple SCell activation is completed in this clause, and
- any to-be-activated unknown SCell has active serving cell(s) or known to-be-activated SCell(s) on the same band

In two CGs of NR-DC, the requirements in this clause shall apply when the following conditions are met:

- UE receives one MAC command per CG for multiple SCell activation within the activation period defined in this clause, and
- UE supports per-FR measurement gap capability, and
- any to-be-activated unknown SCell has active serving cell(s) or known to-be-activated SCell(s) on the same band

The delay within which the UE shall be able to activate the deactivated SCell with other downlink to-be-activated SCell(s) depends upon the specified conditions.

Upon receiving SCell activation command in slot *n* for more than one SCell, for each of the to-be-activated SCell, the UE shall be capable to transmit valid CSI report and apply actions related to the activation command for the SCell being activated no later than in slot $n + \frac{T_{HARQ}+T_{activation_time_multiple_scells}+T_{CSI_Reporting}}{NR\ slot\ length}$, where:

T_{HARQ} (in ms) is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [3]

$T_{activation_time_multiple_scells}$ is the target SCell activation delay in millisecond in multiple SCell activation scenario.

If the SCell is known and belongs to FR1 and the measurement period of the SCell being activated is equal to or smaller than [2400ms], $T_{activation_time_multiple_scells}$ is:

- $T_{FirstSSB_MAX_multiple_scells} + T_{rs}$ + 5ms, if on the same band UE also has at least one parallel to-be-activated SCell which is FR1 known Scell with the measurement period larger than [2400ms] but does not have any parallel to-be-activated SCell which is FR1 unknown SCell.
- $T_{FirstSSB_MAX_multiple_scells} + T_{SMTC_MAX_multiple_scells} + T_{rs}$ + 5ms, if on the same band UE also has at least one parallel to-be-activated SCell which is FR1 unknown Scell
- otherwise, $T_{FirstSSB_MAX_multiple_scells}$ + 5ms.

If the SCell is known and belongs to FR1 and the measurement period of the SCell being activated is larger than [2400ms], $T_{activation_time_multiple_scells}$ is:

- $T_{FirstSSB_MAX_multiple_scells} + T_{SMTC_MAX_multiple_scells} + T_{rs}$ + 5ms, if on the same band UE also has at least one parallel to-be-activated SCell which is FR1 unknown Scell
- otherwise, $T_{FirstSSB_MAX_multiple_scells} + T_{rs}$ + 5ms

If the SCell is unknown and belongs to FR1, provided that the side condition $\hat{E}s/Iot \geq$ -2dB is fulfilled, $T_{activation_time_multiple_scells}$ is:

- $T_{FirstSSB_MAX_multiple_scells} + T_{SMTC_MAX_multiple_scells} + T_{rs}$ +5ms, if the SCell is not counted in N_1
  - The activation delay may be longer if SSB is not in the same half-frame on the SCell and the contiguous FR1 known cell or contiguous FR1 active serving cell

otherwise

- if the following conditions are met
  - 'ssb-PositionInBurst' indicates only one SSB is being actually transmitted, or
  - 'ssb-PositionInBurst' indicates multiple SSBs and TCI indication is provided in same MAC PDU with SCell activation,
- $T_{activation_time_multiple_scells}$ is:
  - $T_{FirstSSB_MAX_multiple_scells} + T_{SMTC_MAX_multiple_scells} + T_{rs} * N_1 + T_{rs}$ +5ms,
- Otherwise:

$T_{activation_time_multiple_scells}$ is:

- 6ms + $T_{FirstSSB_MAX_multiple_scells}$ + $T_{SMTC_MAX_multiple_scells}$ + T_{rs}*N_1 + $T_{L1\text{-}RSRP,measure}$ + $T_{L1\text{-}RSRP,report}$ + T_{HARQ} + max($T_{uncertainty_MAC_multiple_scells}$ + $T_{FineTiming}$ + 2ms, $T_{uncertainty_SP_multiple_scells}$), if semi-persistent CSI-RS is used for CSI reporting,

- 3ms + $T_{FirstSSB_MAX_multiple_scells}$ + $T_{SMTC_MAX_multiple_scells}$ + T_{rs}*N_1 + $T_{L1\text{-}RSRP,measure}$ + $T_{L1\text{-}RSRP,report}$ + max(T_{HARQ} + $T_{uncertainty_MAC_multiple_scells}$ + 5ms + $T_{FineTiming}$, $T_{uncertainty_RRC_multiple_scells}$ + T_{RRC_delay}), if periodic CSI-RS is used for CSI reporting.

If the SCell being activated belongs to FR1 and if there is at least one active serving cell contiguous to the SCell on that FR1 band, if the UE is not provided with SSB configuration (*absoluteFrequencySSB*) nor SMTC configuration for the target SCell, $T_{activation_time_multiple_scells}$ is same as single SCell activation delay requirement as defined in clause 8.3.2.

If the SCell being activated belongs to FR2 and if there is at least one active serving cell on that FR2 band, then $T_{activation_time_multiple_scells}$ is same as single SCell activation delay requirement as defined in clause 8.3.2.

If the SCell being activated belongs to FR2 and if there is at least one active serving cell on that FR2 band, if the UE is not provided with any SMTC for the target SCell, $T_{activation_time_multiple_scells}$ is same as single SCell activation delay requirement as defined in clause 8.3.2

If the SCell being activated belongs to FR2 and if there is no active serving cell on that FR2 band provided that PCell or PSCell is FR1:

If the target SCell is known to UE and semi-persistent CSI-RS is used for CSI reporting, then $T_{activation_time_multiple_scells}$ is same as single SCell activation delay requirement as defined in clause 8.3.2.

If the target SCell is known to UE and periodic CSI-RS is used for CSI reporting, then $T_{activation_time_multiple_scells}$ is same as single SCell activation delay requirement as defined in clause 8.3.2.

If the target SCell is unknown to UE and semi-persistent CSI-RS is used for CSI reporting, provided that the side condition $\hat{E}s/Iot \geq -2dB$ is fulfilled, then $T_{activation_time_multiple_scells}$ is:

- 3 ms + max($T_{uncertainty_MAC_multiple_scells}$ +$T_{FineTiming}$ + 2ms, $T_{uncertainty_SP_multiple_scells}$), if on the same band UE also has at least one parallel to-be-activated SCell which is FR2 known Scell. $T_{uncertainty_MAC_multiple_scells}$ =0 and $T_{uncertainty_SP_multiple_scells}$ =0 if UE receives the SCell activation command, semi-persistent CSI-RS activation command and TCI state activation commands at the same time.

If the target SCell is unknown to UE and periodic CSI-RS is used for CSI reporting, provided that the side condition $\hat{E}s/Iot \geq -2dB$ is fulfilled, then $T_{activation_time_multiple_scells}$ is:

- max($T_{uncertainty_MAC_multiple_scells}$ + 5ms + $T_{FineTiming}$, $T_{uncertainty_RRC_multiple_scells}$ + T_{RRC_delay}-T_{HARQ}), if on the same band UE also has at least one parallel to-be-activated SCell which is FR2 known Scell . $T_{uncertainty_MAC_multiple_scells}$ =0 if UE receives the SCell activation command and TCI state activation commands at the same time.

The requirements for FR2 unknown SCells apply provided that the parameter *ssb-PositionsInBurst* is same for the SCell and the known serving cell on the same FR2 band. The activation delay FR2 unknown SCell may be longer if SSB is not in the same half-frame on the SCell and the contiguous FR2 known cell.

Where,

N_1 is the number counting for parallel FR1 unknown to-be-activated SCell(s) only except the ones which fulfilled the following conditions:

- contiguous to an active serving cell in the same band, or to a known SCell in the same band being activated by the same MAC PDU, and

- A single SSB is used in the unknown SCell; or multiple SSBs are used in the unknown SCell and TCI state indication for PDCCH is provided by the same MAC PDU used for SCell activation; and

- its *ssb-PositionInBurst* is same as the one of contiguous FR1 known cell or contiguous FR1 active serving cell, and

- its RTD with contiguous FR1 known cell or contiguous FR1 active serving cell is smaller than or equal to 260ns with respect to the to-be-activated SCell's SSB numerology and its reception power difference with contiguous FR1 known cell or contiguous FR1 active serving cell is smaller than or equal to 6dB, and

- its SMTC offset is same as the one of contiguous FR1 known cell or contiguous FR1 active serving cell

However, when the following conditions are fulfilled, no activation requirement will be applied for this unknown SCell and other SCells being activated and counted in N_1:

- contiguous to an active serving cell in the same band, or to a known SCell in the same band being activated by the same MAC PDU, and

- A single SSB is used in the unknown SCell; or multiple SSBs are used in the unknown SCell and TCI state indication for PDCCH is provided by the same MAC PDU used for SCell activation; and

- its *ssb-PositionInBurst* is same as the one of FR1 known cell or FR1 active serving cell, and

- its RTD with contiguous FR1 known cell or contiguous FR1 active serving cell is larger than 260ns with respect to the to-be-activated SCell's SSB numerology or its reception power difference with contiguous FR1 known cell or contiguous FR1 active serving cell is larger than 6dB, and

- its SMTC offset is same as the one of FR1 known cell or FR1 active serving cell

$T_{SMTC_MAX_multiple_scells}$:

- In FR1, in case of intra-band SCell activation, $T_{SMTC_MAX_multiple_scells}$ is the longest SMTC periodicity between active serving cells and SCells being activated on the same band provided the cell specific reference signals from the active serving cells and the SCells being activated or released are available in the same slot; in case of inter-band SCell activation, $T_{SMTC_MAX_multiple_scells}$ is the longest SMTC periodicity of SCells being activated on the same band.

- In FR2, $T_{SMTC_MAX_multiple_scells}$ is the longest SMTC periodicity between active serving cells and SCell(s) being activated in FR2 intra-band CA.

- $T_{SMTC_MAX_multiple_scells}$ is bounded to a minimum value of 10ms.

$T_{FirstSSB_MAX_multiple_scells}$: is the time to the end of the first complete SSB burst indicated by the SMTC after slot n + $\frac{T_{HARQ}+3ms}{NR\ slot\ length}$, further fulfilling:

- In FR1, in case of intra-band SCell activation, the occasion when all active serving cells and SCells being activated or released are transmitting SSB bursts in the same slot; in case of inter-band SCell activation, the first occasion when the SCells being activated are transmitting SSB burst.

- In FR2, the occasion when all active serving cells and SCells being activated or released are transmitting SSB bursts in the same slot.

$T_{uncertainty_MAC_multiple_scells}$ is the time period between reception of the activation command for PDCCH TCI, PDSCH TCI (when applicable) and SCell activation command of this unknown SCell.

$T_{uncertainty_SP_multiple_scells}$ is the time period between reception of the activation command for semi-persistent CSI-RS resource set for CQI reporting and SCell activation command of this unknown SCell.

$T_{uncertainty_RRC_multiple_scells}$ is the time period between reception of the RRC configuration message for TCI of periodic CSI-RS for CQI reporting (when applicable) and SCell activation command of this unknown SCell.

T_{rs}, $T_{FineTiming}$, and T_{RRC_delay} is defined in clause 8.3.2.

Longer delays for RRM measurement requirements, and in case of FR2 also SSB based RLM/BFD/CBD/L1-RSRP measurement requirements, can be expected during the cell detection time for unknown SCell activation.

The condition of known SCell in FR1 or FR2 is defined in clause 8.3.2.

If the UE has been provided with higher layer in TS 38.331 [2] signaling of *smtc2* prior to the activation command, T_{SMTC_Scell} follows *smtc1* or *smtc2* according to the physical cell ID of the target cell being activated. $T_{SMTC_MAX_multiple_scell}$ follows *smtc1* or *smtc2* according to the physical cell IDs of the target cells being activated and the active serving cells.

The starting point and the end-point of an interruption window on PCell or any activated SCell in MCG for NR standalone mode, or on PSCell or any activated SCell in SCG for EN-DC mode is same as single SCell activation requirement in clause 8.3.2.

Starting from the slot specified in clause 4.3 of TS 38.213 [3] (timing for secondary Cell activation/deactivation) and until the UE has completed the SCell activation, the UE shall report out of range if the UE has available uplink resources to report CQI for the SCell.

Upon receiving SCell activation command in slot *n*, if the start of the first complete SSB used in the T_X in the different bands which have SCells being activated after $n+\frac{T_{HARQ}+3ms}{NR\ slot\ length}$ are not aligned on time domain among

- SCells in different bands being activated by the same MAC CE if UE does not support per FR gap, or
- SCells in different FR1 bands being activated by the same MAC CE if UE supports per FR gap,

additional interruptions may be expected for the activated serving cells, where

- The number of additional interruptions is no more than the number of FR1 bands which have both SCell being activated for which the activation requirements involve $T_{FirstSSB_MAX\ multiple_scells}$ with T_{rs} and the active serving cell, and
- In each interruption occasion, the interruption length is defined in clause 8.2.2.2.2, and
- Longer activation delay may be expected for multiple SCell activation under one MAC CE with multiple interruptions, and
- T_X is:
  - $T_{FirstSSB}$, for any scenario where $T_{activation_time\ multiple_scells}$ includes $T_{FirstSSB}$;
  - $T_{FirstSSB_MAX\ multiple_scells}$, for any scenario where $T_{activation_time\ multiple_scells}$ includes $T_{FirstSSB_MAX\ multiple_scells}$;
  - $T_{uncertainty_MAC}+T_{FineTiming}$ or $T_{uncertainty_MAC\ multiple_scells}+T_{FineTiming}$, for any scenario where $T_{activation_time\ multiple_scells}$ includes $T_{FineTiming}$.

Otherwise, no additional interruption is expected due to activation of multiple SCells.

Starting from slot $n + T_{HARQ} + 3$ ms where slot *n* is the slot where SCell activation command is received (as specified in clause 4.3 of TS 38.213 [3]) and until the SCell activation completion at UE, after at least one CSI-RS transmission occasion for the channel measurement and reporting (specified in clause 5.2.2.5 of TS 38.214 [26]), the UE shall report out of range if the UE has available uplink resources to report CQI for the SCell.

Starting from the slot specified in clause 4.3 of TS 38.213 [3] (timing for secondary Cell activation/deactivation) and until the UE has completed a first L1-RSRP measurement, the UE shall report lowest valid L1 SS-RSRP range if the UE has available uplink resources to report L1-RSRP for the SCell.

8.3.8 SCell Deactivation Delay Requirement for Activated SCell with Multiple Downlink SCells

The requirements in this clause shall apply for the UE configured with multiple downlink SCells in EN-DC, or in standalone NR carrier aggregation, or in NE-DC, or in NR-DC, provided that,

- in each single CG, there are no other SCell activation, deactivation, addition or release before deactivation is completed for all the SCells deactivated by the single MAC CE in this clause, and
- in EN-DC and NE-DC, there are no E-UTRAN SCell activation, deactivation, addition or release before multiple SCell deactivation is completed in this clause, and

- in EN-DC, NE-DC, NR-DC and standalone NR, UE only receives one single MAC command for multiple SCell deactivation within the deactivation period defined in this clause, or, in NR-DC, per-FR measurement gap capable UE receives one MAC command per CG for multiple SCell deactivation within the deactivation period defined in this clause

Upon receiving SCell deactivation command in slot *n*, the UE shall accomplish the deactivation actions for the SCell being deactivated within the same delay as specified in clause 8.3.3.

The starting point and the end-point of an interruption window on PCell or any activated SCell in MCG for NR standalone mode, or on PSCell or any activated SCell in SCG for EN-DC mode is same as single SCell activation requirement in clause 8.3.3.

8.3.9 Direct SCell Activation of Multiple Downlink SCells at SCell addition

The requirements in this clause apply for UE being configured in the RRC reconfiguration message, TS 38.331 [2], with 2 SCells for which the parameter *sCellState* is set to *activated*.

In EN-DC, NE-DC, stand-alone NR, or in one CG of NR-DC, the requirements in this clause shall apply when the following conditions are met:

- UE only receives one RRC reconfiguration message for direct activation of SCells within the activation period defined in this clause,
- in each single CG, there are no other SCell activation, deactivation, addition or release before direct activation is completed for all the SCells activated by the single RRC reconfiguration message in this clause, and
- in EN-DC and NE-DC, there are no E-UTRAN SCell activation, deactivation, addition or release before the direct SCell activation of multiple SCells in this clause is completed.

In two CGs of NR-DC, the requirements in this clause shall apply when the following conditions are met:

- UE receives one RRC message per CG for direct activation of SCells within the activation period defined in this clause,
- UE supports per-FR measurement gap capability, and
- any to-be-activated unknown SCell has active serving cell(s) or known to-be-activated SCell(s) on the same band.

The UE shall configure the SCells in activated state upon successful completion of the RRC reconfiguration procedure within the specified delay. The UE shall be capable to transmit valid CSI report and apply actions for the directly activated SCell no later than in slot n + $\frac{N_{direct_multiple_scells}}{NR\ slot\ length}$,

where:

- Slot n is the last slot overlapping with the PDSCH containing the RRC reconfiguration message.
- $N_{direct_multiple_scells} = T_{RRC_Process} + T_1 + T_{activation_time_multiple_scells} + T_{CSI_Reporting}$ - 3ms for the cases specified in clause 8.3.7 that TCI state is not indicated within $T_{activation_time}$; otherwise, $N_{direct_multiple_scells} = T_{RRC_Process} + T_1 + T_{HARQ} + T_{activation_time_multiple_scells} + T_{CSI_Reporting}$
  - T_1 and $T_{RRC_Process}$ are specified in clause 8.3.4,
  - T_{HARQ} (in ms) is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [3],
  - $T_{activation_time_multiple_scells}$ and $T_{CSI_Reporting}$ are specified in clause 8.3.7, where the following definition of $T_{FirstSSB}$, $T_{FirstSSB_MAX}$, and $T_{FirstSSB_MAX_multiple_scells}$ shall override the existing ones:
    - $T_{FirstSSB}$ and $T_{FirstSSB_MAX}$: as specified in clause 8.3.4,
    - $T_{FirstSSB_MAX_multiple_scells}$: the time to the end of the first complete SSB burst indicated by the SMTC after slot $n + \frac{T_{RRC_{Process}} + T_1}{NR\ slot\ length}$, further fulfilling:

- In FR1, in case of intra-band SCell activation, the occasion when all active serving cells and SCells being activated or released are transmitting SSB bursts in the same slot; in case of inter-band SCell activation, the first occasion when the SCells being activated are transmitting SSB burst.
- In FR2, the occasion when all active serving cells and SCells being activated or released are transmitting SSB bursts in the same slot.

In addition to CSI reporting defined above, UE shall also apply other actions related to the activation command specified in TS38.321 [7] for an SCell at the first opportunities for the corresponding actions once the SCell is activated.

The UE may be allowed to cause interruptions to serving cells on other component carriers during an interruption window, as specified in clause 8.2. The starting point of an interruption window on spCell or any activated SCell shall not occur before slot n+1+$\frac{T_{HARQ}}{NR\ slot\ length}$, and shall not occur after slot n+1+$\frac{T_{RRC_Process}+T_1+T_X}{NR\ slot\ length}$, where NR slot length is with respect to the numerology of the SCell being activated, and T_X is:

- $T_{FirstSSB}$, for any scenario where $T_{activation_time_multiple_scells}$ includes $T_{FirstSSB}$;
- $T_{FirstSSB_MAX}$, for any scenario where $T_{activation_time_multiple_scells}$ includes $T_{FirstSSB_MAX}$;
- $T_{FirstSSB_MAX_multiple_scell}$, for any scenario where $T_{activation_time_multiple_scells}$ includes $T_{FirstSSB_MAX_multiple_scells}$;
- $T_{uncertainty_MAC}$ +$T_{FineTiming}$, for any scenario where $T_{activation_time_multiple_scells}$ includes $T_{FineTiming}$.

The length of the interruption window may be different for different victim cells, and depends on the applicable scenario and on the frequency band relation between the aggressor cell and the victim cell.

Starting from the slot $n + \frac{T_{RRC_Process} + T_1}{NR\ slot\ length}$ until the UE has completed the direct SCell activation, the UE shall report CQI index = 0 (out of range) if the UE has available uplink resources to report CQI for the SCells.

8.3.10 Direct SCell Activation of Multiple Downlink SCells at Handover

The requirements in this clause apply for UE being configured in the RRC reconfiguration message, TS 38.331 [2], for handover with 2 SCells for which the parameter *sCellState* is set to *activated*.

In MCG of NE-DC, MCG of NR-DC, or in stand-alone NR, the requirements in this clause shall apply when the following conditions are met:

- UE does not receive any RRC reconfiguration message for direct activation of SCells within the activation period defined in this clause,
- there is no other SCell activation, deactivation, addition or release before direct activation is completed for all the SCells activated by the single RRC reconfiguration message in this clause, and
- in NE-DC, there is no E-UTRAN SCell activation, deactivation, addition or release before the direct activation of SCells in this clause is completed.

The UE shall configure the SCells in activated state upon successful completion of the RRC reconfiguration procedure within the specified delay. The UE shall be capable to transmit valid CSI report and apply actions for the directly activated SCells no later than in slot n + $\frac{N_{direct_multiple_scells}}{NR\ slot\ length}$ where:

- Slot n is the last slot overlapping with the PDSCH containing the RRC reconfiguration message,
- $N_{direct_multiple_scells}$ = $T_{RRC_process}$ + $T_{interrupt}$ + T_2 + T_3 + $T_{activation_time_multiple_scells}$ + $T_{CSI_Reporting}$ - 3ms for the cases specified in clause 8.3.7 that TCI state is not indicated within $T_{activation_time}$; otherwise, $N_{direct_multiple_scells}$ = $T_{RRC_process}$ + $T_{interrupt}$ + T_2 + T_3 + T_{HARQ} + $T_{activation_time_multiple_scells}$ + $T_{CSI_Reporting}$
  - $T_{RRC_Process}$, $T_{interrupt}$,T_2, and T_3 are specified in clause 8.3.5,
  - T_{HARQ} (in ms) is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [3],
  - $T_{activation_time_multiple_scells}$ and $T_{CSI_Reporting}$ are specified in clause 8.3.7, where the following definitions of $T_{FirstSSB}$, $T_{FirstSSB_MAX}$, and $T_{FirstSSB_MAX_multiple_scells}$ shall override the existing ones:

- $T_{FirstSSB}$, $T_{FirstSSB_MAX}$: as specified in clause 8.3.5,

- $T_{FirstSSB_MAX_multiple_scell}$: the time to the end of the first complete SSB burst indicated by the SMTC after slot n + $\frac{T_{RRC_Process}+T_{interrupt}+T_2+T_3}{NR\ slot\ length}$, further fulfilling:

  - In FR1, in case of intra-band SCell activation, the occasion when all active serving cells and SCells being activated or released are transmitting SSB bursts in the same slot; in case of inter-band SCell activation, the first occasion when the SCells being activated are transmitting SSB burst.

  - In FR2, the occasion when all active serving cells and SCells being activated or released are transmitting SSB bursts in the same slot.

In addition to CSI reporting defined above, UE shall also apply other actions related to the activation command specified in TS 38.321 [7] for an SCell at the first opportunities for the corresponding actions once the SCell is activated.

The UE may be allowed to cause interruptions to PCell during an interruption window, as specified in clause 8.2. The starting point of an interruption window on PCell shall not occur before slot n+1+ $\frac{T_{RRC\ Processing}+T_{interrupt}+T_2+T_3}{NR\ slot\ length}$, and not occur after slot n+1+$\frac{T_{RRC\ Processing}+T_{interrupt}+T_2+T_3+T_X}{NR\ slot\ length}$, where NR slot length is with respect to the numerology of the SCell being activated, and T_X is:

- $T_{FirstSSB}$, for any scenario where $T_{activation_time_multiple_scells}$ includes $T_{FirstSSB}$;

- $T_{FirstSSB_MAX}$, for any scenario where $T_{activation_time_multiple_scells}$ includes $T_{FirstSSB_MAX}$;

- $T_{FirstSSB_MAX_multiple_scell}$, for any scenario where $T_{activation_time_multiple_scells}$ includes $T_{FirstSSB_MAX_multiple_scells}$;

- $T_{uncertainty_MAC}$ +$T_{FineTiming}$, for any scenario where $T_{activation_time_multiple_scells}$ includes $T_{FineTiming}$.

The length of the interruption window depends on the frequency band relation between the aggressor SCell and the victim PCell.

Starting from the slot $n + \frac{T_{RRC_Process} + T_{interrupt}+T_2+ T_3}{NR\ slot\ length}$ and until the UE has completed the direct SCell activation, the UE shall report CQI index = 0 (out of range) if the UE has available uplink resources to report CQI for the SCells.

8.3.11 Direct SCell Activation of Multiple Downlink SCells at RRC Resume

The requirements in this clause apply for UE being configured in the RRC reconfiguration message in TS38.331 [2] for RRC Resume with 2 SCells for which the parameter *sCellState* is set to *activated*.

The requirements in clause 8.3.9 shall apply, except that the definition of T_1 shall be replaced by the corresponding definition in clause 8.3.6.

8.3.12 SCell Activation Delay Requirement for Deactivated PUCCH SCell

The requirements in this clause shall apply for the UE configured with one downlink SCell and when PUCCH is configured for the SCell being activated.

If the UE has a valid TA for transmitting on an SCell then the UE shall be capable to transmit valid CSI report and apply actions related to the activation command for the SCell being activated on the PUCCH SCell no later than in slot n+$\frac{T_{HARQ}+T_{activation_time}+[4]*T_{target_PL-RS}+T_{CSI_Reporting}}{NR\ slot\ length}$,

Where:

- A TA is considered to be valid provided that the *TimeAlignmentTimer* [2] associated with the TAG containing the PUCCH SCell is running.

- T_{HARQ} (in ms) is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [3].

- $T_{activation_time}$ is the SCell activation delay in millisecond as specified in section 8.3.2 except the definition of $T_{uncertainty_MAC}$ is replaced with:

- $T_{uncertainty_MAC}$ is the time period between reception of the last activation command for PDCCH TCI, PDSCH TCI (when applicable), UL spatial relation (for FR2) relative to
  - SCell activation command for known case;
  - First valid L1-RSRP reporting for unknown case.
- $T_{CSI_reporting}$ is the delay (in ms) as specified in clause 8.3.2.
- $T_{target_PL\text{-}RS}$ is the periodicity of the target pathloss reference signal determined during PUCCH SCell activation.

- If the UE does not have a valid TA for transmitting on an SCell then the UE shall be capable to perform downlink actions related to the SCell activation command as specified in [7] for the SCell being activated on the PUCCH SCell no later than in slot n+$\frac{T_{HARQ}+T_{activation_time}}{NR\ slot\ length}$, and shall be capable to perform uplink actions related to the SCell activation command as specified in [7] for the SCell being activated on the PUCCH SCell no later than in slot n + $\frac{T_{HARQ}+T_{delay_PUCCH_SCell}}{NR\ slot\ length}$ and shall transmit valid CSI report for the SCell being activated on the PUCCH SCell no later than in slot n + $\frac{T_{HARQ}+T_{delay_PUCCH_SCell}}{NR\ slot\ length}$, where:

$T_{delay_PUCCH_SCell} = T_{activation_time} + \max((T_{First_available_CSI} + T_{CSI_processing}), (T1+T2+T3), [4]*T_{target_PL\text{-}RS}) + T_{CSI_reporting_after}$

Where:

- $T_{activation_time}$ is the SCell activation delay in millisecond as specified in section 8.3.2 except the definition of $T_{uncertainty_MAC}$ is replaced with:
  - $T_{uncertainty_MAC}$ is the time period between reception of the last activation command for PDCCH TCI, PDSCH TCI (when applicable), UL spatial relation (when applicable in FR2) relative to
    - SCell activation command for known case;
    - First valid L1-RSRP reporting for unknown case.
- $T_{target_PL\text{-}RS}$ is the periodicity of the target pathloss reference signal determined during PUCCH SCell activation.
- $T_{First_available_CSI}$ is the delay uncertainty (in ms) in acquiring the first available downlink CSI reference resource.
- $T_{CSI_processing}$ is the UE processing time for CSI reporting.
- $T_{CSI_reporting_after}$ is the delay uncertainty (in ms) in acquiring the first available CSI reporting resources after end of max (($T_{First_available_CSI} + T_{CSI_processing}$), (T1+T2+T3), [4]*$T_{target_PL\text{-}RS}$)
- T1 is the delay uncertainty in acquiring the first available PDCCH triggered PRACH occasion in the PUCCH SCell after the slot n+$\frac{T_{HARQ}+T_{activation_time}}{NR\ slot\ length}$.
  - T1 is up to the summation of a delay uncertainty for reception of PDCCH order, SSB to PRACH occasion association period and 10 ms, where SSB to PRACH occasion association period is defined in the table 8.1-1 of TS 38.213
- T2 is the delay from slot n+$\frac{T_{HARQ}+T_{activation_time}+T_1}{NR\ slot\ length}$until UE has obtained a valid TA command for the target PUCCH Scell being activated. Slot n is the slot where the UE receives PUCCH SCell activation command.
- T3 is the delay for applying the received TA for uplink transmission on target PUCCH SCell being activated, as specified in clause 4.2 in TS 38.213.

The pathloss reference signal is known for known PUCCH SCell during activation if the following conditions are met during the period between the last transmission of the RS resource used for L3 RSRP measurement reporting and the completion of PUCCH SCell activation, where the RS resource is the target pathloss reference signal or QCLed (with Type D) to the target pathloss reference signal:

-The PUCCH SCell activation command is received within 1280 ms upon the last transmission of the RS resource used for L3 measurement reporting

- The target pathloss reference signal determination is based on the latest L3 RSRP measurement reporting
- The target pathloss reference signal remains detectable during the PUCCH SCell activation period
  - SNR of the target pathloss reference signal≥-3dB
- The associated SSBs with the target pathloss reference signal remain detectable during the PUCCH SCell activation period
  - SNR of the associated SSB ≥-3dB

The pathloss reference signal is known for unknown PUCCH SCell during activation if the following conditions are met during the period between the last transmission of the RS resource used for L1-RSRP measurement reporting and the completion of PUCCH SCell activation, where the RS resource is the target pathloss reference signal or QCLed (with Type D) to the target pathloss reference signal.

- The PUCCH SCell activation command is received within 1280 ms upon the last transmission of the RS resource used for L1-RSRP measurement reporting
- The target pathloss reference signal determination is based on the latest L1-RSRP measurement reporting
- The target pathloss reference signal remains detectable during the PUCCH SCell activation period
  - SNR of the target pathloss reference signal≥-3dB
- The associated SSBs with the target pathloss reference signal remain detectable during the PUCCH SCell activation period
  - SNR of the associated SSB ≥-3dB

Otherwise, the pathloss reference signal is unknown.

The above delay requirement shall apply provided that:

- The target pathloss reference signal determined during PUCCH SCell activation is known otherwise longer activation time is expected if the pathloss reference signal is unknown; and
- The RA on PUCCH SCell is not interrupted by the RA on PCell otherwise additional delay to activate the SCell is expected; and
- No SRS carrier based switching or SRS antenna port switching occurs during the SCell activation procedure otherwise the PUCCH SCell activation delay can be extended.

The starting point and the end-point of an interruption window on PCell or any activated SCell in MCG for NR standalone mode, or on PSCell or any activated SCell in SCG for EN-DC mode is the same as the interruption in single SCell activation requirement in clause 8.3.2.

In addition to the interruption due to RF retuning during PUCCH SCell activation, if the UE is not capable of *parallelTxPRACH-SRS-PUCCH-PUSCH*, the UE shall transmit PRACH on PUCCH SCell and is allowed to drop or cause interruption to SRS or PUCCH or PUSCH transmission on the SpCell or on any activated SCell. Otherwise, UE is not allowed to drop or cause any interruption to SRS or PUCCH or PUSCH transmission on SpCell or on any activated SCell.

For unknown PUCCH SCell activation in FR2, the requirement only apply when UE supports CSI reporting cross PUCCH group capability , and UE is configured with CSI reporting via SpCell. For unknown PUCCH SCell activation in FR1, the requirement only applies when UE supports CSI reporting cross PUCCH group capability, and UE is configured with CSI reporting via SpCell, if ‘ssb-PositionInBurst’ indicates multiple SSBs but TCI state indication is not provided in same MAC PDU with SCell activation.

The requirement for unknown SCell applies provided that the PDCCH order (when applicable) and the activation commands for TCI, UL spatial relation and PL-RS (when applicable) are based on the latest valid L1-RSRP reporting via Primary PUCCH group.

8.3.13 SCell activation delay Requirement for Deactivated PUCCH SCell with Multiple SCells

8.3.13.1 Introduction

The requirements in this clause shall apply for the UE configured with multiple deactivated downlink SCells and PUCCH is configured for a SCell, and when PUCCH SCell with downlink SCell(s) are activated by one MAC command.

For EN-DC, NE-DC, and standalone NR, the requirements in this clause shall apply when the following conditions are met:

- UE only receives one single MAC command for multiple SCell activation within the activation period defined in this clause
- in each single CG, there are no other SCell activation, deactivation, addition or release before activation is completed for all the SCells activated by the single MAC CE in this clause, and
- in EN-DC and NE-DC, there are no E-UTRAN SCell activation, deactivation, addition or release before multiple SCell activation is completed in this clause, and
- any to-be-activated unknown non-PUCCH SCell in a different band from to-be-activated PUCCH SCell has active serving cell(s) or known to-be-activated non-PUCCH SCell(s) on the same band.
- All DL SCells being activated in the secondary PUCCH group are unknown if PUCCH SCell being activated is unknown.

Upon receiving SCell activation command in slot *n* for more than one SCell and one among the multiple SCells is PUCCH SCell, the UE shall be able to transmit valid CSI report on PUCCH SCell and apply actions related to the SCell activation command as specified in [7] for the PUCCH SCell being activated no later than in slot *n*+ $T_{activate_total_PUCCH_SCell}$. The UE shall be capable to transmit valid CSI report of other SCell no later than in slot n+ $T_{activate_total_other_SCell.}$

Where:

- $T_{activate_total_PUCCH_SCell}$ is $\frac{T_{HARQ}+T_{delay_multiple_SCells_PUCCH_SCell}}{NR\ slot\ length}$,
- $T_{activate_total_other_SCell}$ is $\frac{T_{HARQ}+T_{delay_multiple_SCells_other_SCell}}{NR\ slot\ length}$

Where:

$T_{delay_multiple_SCells_other_SCell}$ is the SCell activation delay for other SCell when the other SCell is activated with multiple SCells and is given by $T_{activation_time_multiple_scells}$ +$T_{CSI_Reporting}$.

$T_{delay_multiple_SCells_PUCCH_SCell}$ is the SCell activation delay for a PUCCH SCell when PUCCH SCell is activated with other SCells and is given by:

- If UE has a Valid TA for transmitting on PUCCH SCell,
  - A TA is considered to be valid provided that the *TimeAlignmentTimer* [2] associated with the TAG containing the PUCCH SCell is running.

$$T_{delay_multiple_SCells_PUCCH_SCell} = T_{activation_time_multiple_scells} + T_{meas} + T_{CSI_Reporting}$$

- If UE do not have valid TA for PUCCH SCell,

$T_{delay_multiple_SCells_PUCCH_SCell} = T_{activation_time_multiple_scells}$ + max (($T_{First_available_CSI}$ + $T_{CSI_processing}$), (T1+T2+T3), [4]*$T_{target_PL\text{-}RS}$) + $T_{CSI_reporting_after}$

Where:

- $T_{activation_time_multiple_scells}$ is the target SCell activation delay in millisecond in multiple SCell activation scenario as specified in section 8.3.7.

- $T_{target_PL\text{-}RS}$ is the periodicity of PL-RS resource when PL-RS of target PUCCH SCell is known

- $T_{CSI_Reporting}$ is the delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2]. If the CSI for other SCell is reported to PUCCH SCell, CSI reporting delay may include uncertainty of waiting for PUCCH SCell activation completion.

- $T_{first_available_CSI}$: the delay uncertainty in acquiring the first available downlink CSI reference resources for secondary PUCCH group.

- $T_{CSI_processing}$: the UE processing time for CSI reporting of secondary group PUCCH SCells.

- $T_{CSI_reporting_after}$ the delay uncertainty in acquiring the first available CSI reporting resource after end of max (($T_{First_available_CSI}$ + $T_{CSI_processing}$), (T1+T2+T3), [4]*$T_{target_PL\text{-}RS}$)

  T1 is the delay uncertainty in acquiring the first available PDCCH triggered PRACH occasion in the PUCCH SCell after $T_{activation_time_multiple_scells}$.

  - T1 is up to the summation of a delay uncertainty for reception of PDCCH order, SSB to PRACH occasion association period and 10 ms, where SSB to PRACH occasion association period is defined in the table 8.1-1 of TS 38.213

- T2 is the delay from slot n + (T_{HARQ} + $T_{activation_time_multiple_scells}$ + T1)/NR slot length until UE has obtained a valid TA command for the target PUCCH SCell being activated. Slot n is the slot where the UE receives PUCCH SCell activation command.

- T3 is the delay for applying the received TA for uplink transmission on target PUCCH SCell being activated, and greater than or equal to k+1 slot, where k is defined in clause 4.2 in TS 38.213.The starting point and the endpoint of an interruption window on PCell or any activated SCell in MCG for NR standalone mode, or on PSCell or any activated SCell in SCG for EN-DC mode is same as single SCell activation requirement in clause 8.3.2.

Starting from slot n + T_{HARQ} + 3 ms where n is the slot where SCell activation command is received (as specified in clause 4.3 of TS 38.213 [3]) and until the SCell activation completion at UE, after at least one CSI-RS transmission occasion for the channel measurement and reporting (specified in clause 5.2.2.5 of TS 38.214 [26]), the UE shall report out of range if the UE has available uplink resources to report CQI for the SCell.

In addition to the interruption due to RF retuning during multiple SCell activation, if the UE is not capable of *parallelTxPRACH-SRS-PUCCH-PUSCH* for inter-band CA, then the UE shall transmit PRACH on PUCCH SCell and is allowed to drop or cause interruption to SRS or PUCCH or PUSCH transmission on the SpCell or on any activated SCell. Otherwise, UE is not allowed to drop or cause any interruption of SRS or PUCCH or PUSCH transmission on SpCell or on any activated SCell.

Upon receiving SCell activation command in slot *n*, if the start of the first complete SSB used in the T_X in the different bands which have SCells being activated after $n+\frac{T_{HARQ}+3ms}{NR\ slot\ length}$ are not aligned on time domain among

- SCells in different bands being activated by the same MAC CE if UE does not support per FR gap, or

- SCells in different FR1 bands being activated by the same MAC CE if UE supports per FR gap,

additional interruptions may be expected for the activated serving cells, where

- The number of additional interruptions is no more than the number of FR1 bands which have both SCell being activated for which the activation requirements involve $T_{FirstSSB_MAX\ multiple_scells}$ with T_{rs} and the active serving cell, and

- In each interruption occasion, the interruption length is defined in clause 8.2.2.2.2, and

- Longer activation delay may be expected for multiple SCell activation under one MAC CE with multiple interruptions, and

- T_X is:

  - $T_{FirstSSB}$, for any scenario where $T_{activation_time\ multiple_scells}$ includes $T_{FirstSSB}$;

- $T_{FirstSSB_MAX\ multiple_scells}$, for any scenario where $T_{activation_time\ multiple_scells}$ includes $T_{FirstSSB_MAX\ multiple_scells}$;
- $T_{uncertainty_MAC}+T_{FineTiming}$ or $T_{uncertainty_MAC\ multiple_scells}+T_{FineTiming}$, for any scenario where $T_{activation_time\ multiple_scells}$ includes $T_{FineTiming}$.

Otherwise, no additional interruption is expected due to activation of multiple SCells.

[Starting from the slot specified in clause 4.3 of TS 38.213 [3] (timing for secondary Cell activation/deactivation) and until the UE has completed a first L1-RSRP measurement, the UE shall report lowest valid L1 SS-RSRP range if the UE has available uplink resources to report L1-RSRP for the SCell.]

8.3.14 SCell Deactivation Delay Requirement for Activated PUCCH SCell

The requirements in this clause shall apply for the UE configured with one SCell configured with PUCCH in EN-DC, or in standalone NR carrier aggregation, or in NE-DC.

Upon receiving PUCCH SCell deactivation command in slot *n*, the UE shall accomplish the deactivation actions for the PUCCH SCell being deactivated no later than in slot $n + \frac{T_{HARQ}+3ms}{NR\ slot\ length}$. The starting point of an interruption window on spCell or any activated SCell, as specified in clause 8.2, shall not occur before slot $n+1+\frac{T_{HARQ}}{NR\ slot\ length}$ and not occur after slot $n+1+\frac{T_{HARQ}+3ms}{NR\ slot\ length}$, where NR slot length is with respect to the numerology used in the PUCCH SCell being deactivated.

The length of the interruption window may be different for different victim cells, and depends on the applicable scenario and on the frequency band relation between the aggressor cell and the victim cell.

8.3.15 SCell Deactivation Delay Requirement for Activated PUCCH SCell with Multiple Downlink SCells

The requirements in this clause shall apply for the UE configured with multiple downlink SCells and one SCell configured with PUCCH in EN-DC, or in standalone NR carrier aggregation, or in NE-DC, provided that,

- in each single CG, there are no other SCell activation, deactivation, addition or release before deactivation is completed for all the SCells deactivated by the single MAC CE in this clause, and
- in EN-DC and NE-DC, there are no E-UTRAN SCell activation, deactivation, addition or release before multiple SCell deactivation is completed in this clause, and
- in EN-DC, NE-DC and standalone NR, UE only receives one single MAC command for multiple SCell deactivation within the deactivation period defined in this clause

Upon receiving SCell deactivation command in slot *n*, the UE shall accomplish the deactivation actions for the SCells (including one SCell configured with PUCCH) being deactivated within the same delay as specified in clause 8.3.12.

The starting point and the end-point of an interruption window on PCell or any activated SCell in MCG for NR standalone mode, or on PSCell or any activated SCell in SCG for EN-DC mode is same as single SCell activation requirement in clause 8.3.12.

8.3.16 Fast SCell Activation Delay Requirement for Deactivated SCell

Aperiodic CSI-RS resources can be configured for fast SCell activation. The requirements in this clause shall apply for the UE configured with one downlink SCell in EN-DC, or in standalone NR carrier aggregation or in NE-DC or in NR-DC and when one SCell is being activated. The requirements in this clause shall apply for the UE provided with aperiodic CSI-RS resources for SCell activation for the target SCell.

Note: If UE is allocated A-TRS for fast Scell activation, the UE is not required to use the SSB of the target Scell.

The delay within which the UE shall be able to activate the deactivated SCell depends upon the specified conditions.

Upon receiving SCell activation command in slot *n*, the UE shall be capable to transmit valid CSI report and apply actions related to the activation command for the SCell being activated no later than in slot n + $\frac{T_{HARQ}+T_{activation_time}+T_{CSI_Reporting}}{NR\ slot\ length}$, where:

T_{HARQ} (in ms) is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [3]

$T_{activation_time}$ is the SCell activation delay in millisecond.

If the SCell is known and belongs to FR1, $T_{activation_time}$ is:

- $T_{FirstATRS}$+ 5ms, if the measurement period of the SCell being activated is equal to or smaller than [2400ms].
- $T_{FirstATRS}$ + T_{gap} + T_{ATRS} + 5ms, if the measurement period of the SCell being activated is larger than [2400ms].

Note: The RSs on the activated serving cell in the same band are not required to be transmitted in the same slot as the temporary RS.

Note: UE may report inaccurate non-zero CQI for any activated Cell and being activated SCell during the fast SCell activation procedure only if the RSs on the activated serving cell in the same band are not transmitted in the same slot as the aperiodic CSI-RS for fast SCell activation.

If the SCell is unknown and belongs to FR1, and SCell is contiguous to an active serving cell in the same band, provided that the side condition $\hat{E}s/Iot \geq -2dB$ is fulfilled, $T_{activation_time}$ is:

- $T_{FirstATRS}$ + T_{gap} + T_{ATRS} + 5ms, if the following conditions are met,
  - the SCell is contiguous to an active serving cell in the same band, and
  - its *ssb-PositionInBurst* is same as the one of contiguous FR1 active serving cell, and
  - its SMTC offset is same as the one of contiguous FR1 active serving cell, and
  - its RTD with contiguous FR1 active serving cell is smaller than or equal to 260ns with respect to the to-be-activated SCell's SSB numerology, and its reception power difference with contiguous FR1 active serving cell is smaller than or equal to 6dB;

Note: The RSs on the activated serving cell in the same band are not required to be transmitted in the same slot as the temporary RS.

Note: UE may report inaccurate non-zero CQI for any activated SCell and being activated SCell during the fast SCell activation procedure only if the RSs on the activated serving cell in the same band are not transmitted in the same slot as the aperiodic CSI-RS for fast SCell activation.

If the SCell being activated belongs to FR2 and if there is at least one active serving cell on that FR2 band, then $T_{activation_time}$ is $T_{FirstATRS}$+ 5ms provided:

- The UE is provided with aperiodic CSI-RS resources for SCell activation for the target SCell, and
- The SSBs in the serving cell(s) and the SSBs in the SCell being activated fulfil the condition defined in clause 3.6.3,
- The parameter *ssb-PositionsInBurst* is same for the serving cell(s) and the SCell.
- SSB is in the same half-frame on the SCell and the contiguous FR2 active serving cell

If the SCell being activated belongs to FR2 and if there is no active serving cell on that FR2 band provided that PCell or PSCell is in FR1 or in FR2, and assuming PDCCH TCI and PDSCH TCI (when applicable) are associated with the triggered aperiodic CSI-RS resources for fast SCell activation, and when the following conditions are fulfillied:

- One of the candidate TCI states configured in TCI-StatesPDCCH-ToAddList has the same QCL source of the triggered A-TRS,
- The QCL source of CSI-RS for CQI reporting is the same as the triggered A-TRS,

- The TCI state for PDCCH/PDSCH is the same as A-TRS remain unchanged during SCell activation,

- If the target SCell belongs to FR2 is known to UE and semi-persistent CSI-RS is used for CSI reporting, then $T_{activation_time}$ is:
  - 3ms + max($T_{FirstATRS}$ + 2ms, $T_{uncertainty_SP}$), where $T_{uncertainty_SP}$=0 if UE receives the SCell activation command and semi-persistent CSI-RS activation command at the same time.
- If the target SCell belongs to FR2 is known to UE and periodic CSI-RS is used for CSI reporting, then $T_{activation_time}$ is:
  - max($T_{FirstATRS}$ + 5ms, $T_{uncertainty_RRC}$ + T_{RRC_delay}-T_{HARQ}).

  where,

  $T_{FirstATRS}$: is the time to the end of the first complete CSI-RS burst for SCell activation after slot n + $\frac{T_{HARQ}+3ms}{NR\ slot\ length}$, where the CSI-RS burst is defined as four CSI-RS resources in two consecutive slots.

  T_{ATRS} is the CSI-RS burst for SCell activation where the CSI-RS burst is defined as four CSI-RS resources in two consecutive slots.

  T_{gap} is a gap length between two aperiodic CSI-RS bursts,

  - at least 2 slots for 15kHz and 30kHz
  - at least 3 slots for 60kHz

  $T_{uncertainty_RRC}$ is the time period between reception of the RRC configuration message for TCI of periodic CSI-RS for CQI reporting (when applicable) relative to SCell activation command.

  $T_{uncertainty_SP}$ is the time period between reception of the activation command for semi-persistent CSI-RS resource set for CQI reporting relative to SCell activation command for known case.

  T_{RRC_delay} is the RRC procedure delay as specified in TS38.331 [2].

  $T_{CSI_reporting}$ is the delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2].

SCell in FR1 is known if it has been meeting the following conditions:

- During the period equal to max(5*measCycleSCell, 5*DRX cycles) for FR1 before the reception of the SCell activation command:
  - the UE has sent a valid measurement report for the SCell being activated and
  - the SSB measured remains detectable according to the cell identification conditions specified in clause 9.2 and 9.3.
- the SSB measured during the period equal to max(5*measCycleSCell, 5*DRX cycles) also remains detectable during the SCell activation delay according to the cell identification conditions specified in clause 9.2 and 9.3.

Otherwise SCell in FR1 is unknown.

For the first SCell activation in FR2 bands, the SCell is known if it has been meeting the following conditions:

- During the period equal to 4s for UE supporting power class 1/5 and 3s for UE supporting power class 2/3/4 before UE receives the last activation command for PDCCH TCI, PDSCH TCI (when applicable) and semi-persistent CSI-RS for CQI reporting (when applicable):
  - the UE has sent a valid L3-RSRP measurement report with SSB index
  - SCell activation command is received after L3-RSRP reporting and no later than the time when UE receives MAC-CE command for TCI activation

- During the period from L3-RSRP reporting to the valid CQI reporting, the reported SSBs with indexes remain detectable according to the cell identification conditions specified in clauses 9.2 and 9.3, and the TCI state is selected based on one of the latest reported SSB indexes.

Otherwise, the first SCell in FR2 band is unknown.

In addition to CSI reporting defined above, UE shall also apply other actions related to the activation command specified in TS 38.331 [2] for a SCell at the first opportunities for the corresponding actions once the SCell is activated.

The starting point of an interruption window on spCell or any activated SCell, as specified in clause 8.2, shall not occur before slot n+1+$\frac{T_{HARQ}}{NR\ slot\ length}$ and not occur after slot slot n+1+$\frac{T_{HARQ}+3ms+T_X}{NR\ slot\ length}$, where NR slot length is with respect to the numerology used in the SCell being activated, and T_X is:

- $T_{FirstATRS}$, for any scenario where $T_{activation_time}$ includes $T_{FirstATRS}$;

The length of the interruption window may be different for different victim cells, and depends on the applicable scenario and on the frequency band relation between the aggressor cell and the victim cell.

The requirements in this clause and requriements on interruption due to SCell activation in clause 8.x apply provided that the SSB and A-TRS of the to-be-activated SCell is within the first active DL BWP of the Scell.

Starting from slot $n + T_{HARQ} + 3$ ms where slot n is the slot where SCell activation command is received (as specified in clause 4.3 of TS 38.213 [3]) and until the SCell activation completion at UE, after at least one CSI-RS transmission occasion for the channel measurement and reporting (specified in clause 5.2.2.5 of TS 38.214 [26]), the UE shall report out of range if the UE has available uplink resources to report CQI for the SCell.

8.3A SCell Activation and Deactivation Delay in Carriers with CCA

8.3A.1 Introduction

This clause defines requirements for the delay within which the UE shall be able to activate a deactivated SCell operating with CCA and deactivate an activated SCell operating with CCA in EN-DC or in standalone NR carrier aggregation.

In the requirements of clause 8.3A, the term SMTC occasion not available at the UE refers to when the SMTC contains SSBs configured by gNB in a cell on a carrier frequency subject to CCA, but the first two successive candidate SSB positions for the same SSB index within the discovery burst transmission window are not available at the UE due to DL CCA failures at gNB during the corresponding period; otherwise the SMTC occasion is considered as available at the UE.

In the requirements of clause 8.3A, the term CSI-RS occasion not available at the UE due to DL CCA failures referes to when the CSI-RS is configured by gNB for the UE but not available at the UE due to DL CCA failures at gNB during the corresponding period.

The requirements shall apply for EN-DC and standalone NR carrier aggregation.

8.3A.2 SCell Activation Delay Requirement for Deactivated SCell

The requirements in this clause shall apply for the UE configured with one downlink SCell operating with CCA in EN-DC or in standalone NR carrier aggregation and when one SCell operating with CCA is being activated but none of the RRC parameters *CO-DurationPerCell-r16*, *SlotFormatIndicator*, and *CSI-RS-ValidationWith-DCI-r16* is configured and all of the CSI reporting resources for being-activated SCell are available.

The delay within which the UE shall be able to activate the deactivated SCell depends upon the specified conditions.

Upon receiving SCell activation command in slot *n*, the UE shall be capable to transmit valid CSI report and apply actions related to the activation command for the SCell being activated no later than in slot $n + (T_{HARQ} + T_{activation_time_withCCA} + T_{CSI_reporting_withCCA})/NR_slot_length$, where:

- T_{HARQ} (in ms) is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [3]. In the event of UE not being able to transmit the acknowledgment due to UL CCA failures: T_{HARQ} is extended to also include the time to all next HARQ feedback transmission and retransmission opportunities, until the time of its successful transmission, as specified in TS 38.213 [3]; no extension of T_{HARQ} due to UL CCA failures is allowed for Type 2C UL channel access procedure as defined in TS 37.213 [57].

  - $T_{activation_time_withCCA}$ is the SCell activation delay in millisecond.

    - If the SCell is known and belongs to FR1, $T_{activation_time_withCCA}$ is:

      - $T_{FirstSSB} + L_1*T_{rs}$ + 5ms, if the measurement period of the SCell being activated is equal to or smaller than 2400ms.

      - $T_{FirstSSB_MAX} + L_{2,1}*T_{SMTC_MAX} + (1 + L_{2,2})*T_{rs}$ + 5ms, if the measurement period of the SCell being activated is larger than 2400ms.

    - If the SCell is unknown and belongs to FR1, provided that the side condition Ês/Iot ≥ -2 dB is fulfilled and the SCell can be successfully detected in one attempt, $T_{activation_time_withCCA}$ is:

    - $T_{FirstSSB_MAX} + (1 + L_{3,1})*T_{SMTC_MAX} + (2 + L_{3,2})*T_{rs}$ + 5ms.- If the SCell being activated belongs to FR2-2 and if there is at least one active serving cell on that FR2-2 band, if the UE supporting *scellWithoutSSB* is not provided with any SMTC for the target SCell, $T_{activation_time_withCCA}$ is 3 ms, provided

      - the RS (s) of SCell being activated is (are) QCL-TypeD with RS (s) of one active serving cell on that FR2-2 band.

    - If the SCell being activated belongs to FR2-2 and if there is no active serving cell on that FR2-2 band provided that PCell or PSCell is in FR1 or in FR2-2:

      - If the target SCell is known to UE and semi-persistent CSI-RS is used for CSI reporting, then $T_{activation_time_withCCA}$ is:

        - 3ms + max($T_{uncertainty_MAC} + T_{FineTiming}$ + 2ms, $T_{uncertainty_SP}$), where $T_{uncertainty_MAC}$=0 and $T_{uncertainty_SP}$=0 if UE receives the SCell activation command, semi-persistent CSI-RS activation command and TCI state activation command at the same time.

      - If the target SCell is known to UE and periodic CSI-RS is used for CSI reporting, then $T_{activation_time}$ is:

        - max($T_{uncertainty_MAC}$ + 5ms + $T_{FineTiming}$, $T_{uncertainty_RRC} + T_{RRC_delay}$-$T_{HARQ}$), where $T_{uncertainty_MAC}$=0 if UE receives the SCell activation command and TCI state activation commands at the same time.

      - If the PCell/PSCell and the target SCell are configured as FR1-FR2-2 CA or if the PCell/PSCell and the target SCell are in a FR2-2 band pair with independent beam management, and the target SCell is unknown to UE and semi-persistent CSI-RS is used for CSI reporting, provided that the side condition Ês/Iot ≥ -2dB is fulfilled, then $T_{activation_time_withCCA}$ is:

        - 6ms + $T_{FirstSSB_MAX}$ + (23+[N*$L_{4,1}$])*T_{SMTC_MAX} + (12+[N *$L_{4,2}$])*T_{rs} + $T_{L1\text{-}RSRP,\ measure}$ + $T_{L1\text{-}RSRP,\ report}$ + T_{HARQ} + max($T_{uncertainty_MAC}$ + $T_{FineTiming}$ + 2ms, $T_{uncertainty_SP}$).

      - If the PCell/PSCell and the target SCell are configured as FR1-FR2-2 CA or if the PCell/PSCell and the target SCell are in a FR2-2 band pair with independent beam management, and the target SCell is unknown to UE and periodic CSI-RS is used for CSI reporting, provided that the side condition Ês/Iot ≥ -2dB is fulfilled, then $T_{activation_time_withCCA}$ is:

        - 3ms + $T_{FirstSSB_MAX}$ + (23+[N*$L_{5,1}$])*T_{SMTC_MAX} + (12+[N *$L_{5,2}$])*T_{rs} + $T_{L1\text{-}RSRP,\ measure}$ + $T_{L1\text{-}RSRP,\ report}$ + max {(T_{HARQ} + $T_{uncertainty_MAC}$ + 5ms + $T_{FineTiming}$), ($T_{uncertainty_RRC}$ + T_{RRC_delay})}.

      Where,

      T_{SMTC_MAX}:

      - In case of intra-band SCell activation, T_{SMTC_MAX} is the longest SMTC periodicity between active serving cells and SCell being activated provided the cell specific reference signals from the active serving cells and the SCells being activated or released are available in the same slot;

      - In case of inter-band SCell activation, T_{SMTC_MAX} is the SMTC periodicity of SCell being activated;

- T_{SMTC_MAX} is bounded to a minimum value of 10ms.

T_{rs} is the SMTC periodicity of the SCell being activated if the UE has been provided with an SMTC configuration for the SCell in SCell addition message, otherwise T_{rs} is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement which involves T_{rs} is applied with T_{rs} = 5ms assuming the SSB transmission periodicity is 5ms. There are no requirements if the SSB transmission periodicity is not 5ms

$T_{FirstSSB}$: is the time to the end of the first complete configured SSB burst indicated by the SMTC after slot n + (T_{HARQ}+3ms)/*NR_slot_length*

$T_{FirstSSB_MAX}$: is the time to the end of first complete configured SSB burst indicated by the SMTC after slot n + (T_{HARQ}+3ms)/*NR_slot_length* when all active serving cells and SCells being activated or released have configured SSB bursts in the same slot for intra-band scenario. In case of inter-band SCell activation, $T_{FirstSSB_MAX}$ is the time to the end of the first complete configured SSB burst of the SCell being activated. In FR2-2, the occasion when all active serving cells and SCells being activated or released are transmitting SSB bursts in the same slot.

L_1 ($L_1 \leq L_{1,max}$) is the number of configured SMTC occasions not available at the UE. $L_{1,max}$ = 2 if $T_{rs} \leq$ 40 ms; otherwise $L_{1,max}$ = 1.

$L_{2,1}$ ($L_{2,1} \leq L_{2,1,max}$) and $L_{3,1}$ ($L_{3,1} \leq L_{3,1,max}$) are the numbers of configured SMTC occasions not available at the UE, for a known and unknown SCell activation respectively,

in the SCell being activated, for inter-band scenario, or

in any of the SCells already activated or being activated provided their cell specific reference signals are configured in the same slot, for intra-band scenario

and $L_{2,1,max}$ = 2 if $T_{SMTC_MAX} \leq$ 40 ms; otherwise $L_{2,1,max}$ = 1. $L_{3,1,max}$ = 2 if $T_{SMTC_MAX} \leq$ 40 ms; otherwise $L_{3,1,max}$ = 1.

$L_{2,2}$ ($L_{2,2} \leq L_{2,2,max}$) and $L_{3,2}$ ($L_{3,2} \leq L_{3,2,max}$) are the number of configured SMTC occasions not available at the UE in the SCell being activated. $L_{2,2,max}$ = 2 if $T_{rs} \leq$ 40 ms; otherwise $L_{2,2,max}$ = 1. $L_{3,2,max}$ = 2 if $T_{rs} \leq$ 40 ms; otherwise $L_{3,2,max}$ = 1.

N = TBD for an FR2-2 unknown SCell activation.

$L_{4,1}$ ($L_{4,1} \leq L_{4,1,max}$) and $L_{5,1}$ ($L_{5,1} \leq L_{5,1,max}$) are the numbers of SMTC occasions groups not available at the UE, for an FR2-2 unknown SCell activation,

in the SCell being activated, for inter-band scenario, or

in any of the SCells already activated or being activated provided their cell specific reference signals are configured in the same slot, for intra-band scenario

and $L_{4,1,max}$ = 2 if $T_{SMTC_MAX} \leq$ 40 ms; otherwise $L_{4,1,max}$ = 1. $L_{5,1,max}$ = 2 if $T_{SMTC_MAX} \leq$ 40 ms; otherwise $L_{5,1,max}$ = 1.

$L_{4,2}$ ($L_{4,2} \leq L_{4,2,max}$) and $L_{5,2}$ ($L_{5,2} \leq L_{5,2,max}$) are the number of SMTC occasions groups not available at the UE in the FR2-2 unknown SCell being activated. $L_{4,2,max}$ = 2 if $T_{rs} \leq$ 40 ms; otherwise $L_{4,2,max}$ = 1. $L_{5,2,max}$ = 2 if $T_{rs} \leq$ 40 ms; otherwise $L_{5,2,max}$ = 1.

$T_{FineTiming}$ is the time period between UE finish processing the last activation command for PDCCH TCI, PDSCH TCI (when applicable) and the timing of first complete available SSB corresponding to the TCI state.

$T_{L1\text{-}RSRP,\ measure}$ is L1-RSRP measurement delay $T_{L1\text{-}RSRP_Measurement_Period_SSB_CCA}$ ms as defined in clause 9.5A.4.1 with the assumption of M=1.

$T_{L1\text{-}RSRP,\ report}$ is delay of acquiring CSI reporting resources.

$T_{uncertainty_MAC}$ is the time period between reception of the last activation command for PDCCH TCI, PDSCH TCI (when applicable) relative to

- SCell activation command for known case;
- First valid L1-RSRP reporting for unknown case.

$T_{uncertainty_RRC}$ is the time period between reception of the RRC configuration message for TCI of periodic CSI-RS for CQI reporting (when applicable) relative to

- SCell activation command for known case;
- First valid L1-RSRP reporting for unknown case.

$T_{uncertainty_SP}$ is the time period between reception of the activation command for semi-persistent CSI-RS resource set for CQI reporting relative to

- SCell activation command for known case;
- First valid L1-RSRP reporting for unknown case.

T_{RRC_delay} is the RRC procedure delay as specified in TS38.331 [2].

Longer delays for RRM measurement requirements, and in case of FR2-2 also SSB based RLM/BFD/CBD/L1-RSRP measurement requirements, can be expected during the cell detection time for unknown SCell activation.

When *absoluteFrequencySSB* is not configured in *DownlinkConfigCommon* for target SCell but SMTC for target SCell is configured, no requirement would be applied.

$T_{CSI_reporting_withCCA} = T_{CSI_reporting} + T_{CSI_ReportingDelay}$, where

$T_{CSI_reporting}$ is the delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2].

$T_{CSI_ReportingDelay}$ is the additional delay in transmission of CSI reporting due to UL CCA failures at the UE. If there are no uplink resources for reporting the valid CSI, then the UE shall use the next available opportunities for reporting the corresponding valid CSI as specified in TS 38.213 [3].

Upon exceeding any of the maximum numbers $L_{1,max}$, $L_{2,1,max}$, $L_{2,2,max}$, $L_{3,1,max}$, and $L_{3,2,max}$ of SMTC occasions or CSI-RS occasions, respectively, not available at the UE, the UE shall abandon the SCell activation procedure.

SCell operating with CCA in FR1 is known if it has been meeting the following conditions:

- During the period equal to max(5 measCycleSCell, 5 DRX cycles) before the reception of the SCell activation command:
  - the UE has sent a valid measurement report for the SCell being activated and
  - the SSB measured remains detectable in the SMTC occasions available at the UE, according to the cell identification conditions specified in clause 9.2A and 9.3A.
- the SSB measured during the period equal to max(5 measCycleSCell, 5 DRX cycles) also remains detectable - the SSB measured during the period equal to max(5 measCycleSCell, 5 DRX cycles) also remains detectable in the SMTC occasions available at the UE during the SCell activation delay according to the cell identification conditions specified in clause 9.2A and 9.3A.

Otherwise SCell operating with CCA in FR1 is unknown.

For the first SCell activation with CCA in FR2-2 bands, the SCell is known if it has been meeting the following conditions:

- During the period equal to 4s for UE supporting power class 1/5 and 3s for UE supporting power class 2/3/4 before UE receives the last activation command for PDCCH TCI, PDSCH TCI (when applicable) and semi-persistent CSI-RS for CQI reporting (when applicable):
  - the UE has sent a valid L3-RSRP measurement report with SSB index

  - SCell activation command is received after L3-RSRP reporting and no later than the time when UE receives MAC-CE command for TCI activation

- During the period from L3-RSRP reporting to the valid CQI reporting, the reported SSBs with indexes remain detectable according to the cell identification conditions specified in clauses 9.2 and 9.3, and the TCI state is selected based on one of the latest reported SSB indexes.

Otherwise, the first SCell with CCA in FR2-2 band is unknown. The requirement for unknown SCell applies provided that the activation commands for PDCCH TCI, PDSCH TCI (when applicable), semi-persistent CSI-RS for CQI reporting (when applicable), and configuration message for TCI of periodic CSI-RS for CQI reporting (when applicable) are based on the latest valid L1-RSRP reporting.

If the UE has been provided with higher layer in TS 38.331 [2] signaling of *smtc2* prior to the activation command, T_{SMTC_Scell} follows *smtc1* or *smtc2* according to the physical cell ID of the target cell being activated. T_{SMTC_MAX} follows *smtc1* or *smtc2* according to the physical cell IDs of the target cells being activated and the active serving cells.

In addition to CSI reporting defined above, UE shall also apply other actions related to the activation command specified in TS 38.331 [2] for a SCell at the first opportunities for the corresponding actions once the SCell is activated.

For intra-band CA, the starting point of an interruption window on SpCell or any activated SCell as specified in clause 8.2, shall not occur before slot n+1+ $\frac{T_{HARQ}}{NR\ slot\ length}$ and not occur after slot n+1+$\frac{T_{HARQ}+3+T_X}{NR\ slot\ length}$, where T_X is:

- $T_{FirstSSB}$, for known SCell activation when SCell measurement cycle is equal to or smaller than 160ms;

- $T_{FirstSSB_MAX} + L_{2,1} * T_{SMTC_MAX}$ for known SCell activation when SCell measurement cycle is greater than 160ms;

- $T_{FirstSSB_MAX} + L_{3,1} * T_{SMTC_MAX}$ for unknown SCell activation

For inter-band CA, the starting point of an interruption window on SpCell or any activated SCell as specified in clause 8.2, shall not occur before slot n+1+ $\frac{T_{HARQ}}{NR\ slot\ length}$ and not occur after slot n+1+$\frac{T_{HARQ}+3+T_X}{NR\ slot\ length}$, where T_X is:

- $T_{FirstSSB}$, for known SCell activation when SCell measurement cycle is equal to, or smaller than, 160ms.

For intra-band CA,

- While the SCell being activated is known with measurement cycle equal to or smaller than 160ms, no more than one interruption is allowed during SCell activation.

- While the SCell being activated is known with measurement cycle greater than 160ms, up to $1+L_{2,1}$ interruptions are allowed during SCell activation,

- While the SCell being activated is unknown, up to $1+L_{3,1}$ interruptions are allowed during SCell activation. When $L_{3,1}>0$, performance degradation may be expected on any activated intra-band victim cells during the SCell activation

- For a single interruption (L=0), interruption window length at SCell activation does not depend on DL CCA failures.

For inter-band CA,

- For any active cell in the same band with the SCell being activated, the interruption requirements (i.e. number of interruptions and starting point of an interruption) for intra-band CA apply.

- For any active cell outside the band with the SCell being activated, a single interruption applies

The number of interruptions and length of each interruption window may be different for different victim cells and depends on the applicable scenario and on the frequency band relation between the aggressor cell and the victim cell. For a single interruption (L=0), the interruption window length at SCell activation does not depend on DL CCA failures.

Starting from slot $n + T_{HARQ} + 3$ ms where slot *n* is the slot where SCell activation command is received (as specified in clause 4.3 of TS 38.213 [3]) and until the SCell activation completion at UE, after at least one CSI-RS transmission occasion for the channel measurement and reporting (specified in clause 5.2.2.5 of TS 38.214 [26]), the UE shall report out of range if the UE has available uplink resources to report CQI for the SCell.

Starting from the slot specified in clause 4.3 of TS 38.213 [3] (timing for secondary Cell activation/deactivation) and until the UE has completed a first L1-RSRP measurement, the UE shall report lowest valid L1 SS-RSRP range if the UE has available uplink resources to report L1-RSRP for the SCell.

The requirements in this section do not apply when *sCellDeactivationTimer* [2] is not configured and when $T_{activation_time_withCCA}$ exceeds 1280 ms.

8.3A.3 SCell Deactivation Delay Requirement for Activated SCell

The requirements in this clause shall apply for the UE configured with one downlink SCell operating with CCA in EN-DC or in standalone NR carrier aggregation.

Upon receiving SCell deactivation command in slot *n*, the UE shall accomplish the deactivation actions for the SCell being deactivated no later than in slot $n+(T_{HARQ}+3ms)/NR_slot_length$. The starting point of an interruption window on spCell or any activated SCell, as specified in clause 8.2, shall not occur before slot $n+1+\frac{T_{HARQ}}{NR\ slot\ length}$ and not occur after slot $n+1+\frac{T_{HARQ}+3ms}{NR\ slot\ length}$, where NR slot length is with respect to the numerology used in the SCell being deactivated.

Upon expiry of the *sCellDeactivationTimer* in slot *n*, the UE shall accomplish the deactivation actions for the SCell being deactivated no later than in slot $n + \frac{3ms}{NR\ slot\ length}$. The starting point of an interruption window on spCell or any activated SCell, as specified in clause 8.2, shall not occur before slot n+1 and not occur after slot $n+1+\frac{3ms}{NR\ slot\ length}$, where NR slot length is with respect to the numerology used in the SCell being deactivated.The length of the interruption window may be different for different victim cells, and depends on the applicable scenario and on the frequency band relation between the aggressor cell and the victim cell.

The requirements in this section do not apply when *sCellDeactivationTimer* [2] is not configured and when SCell deactivation delay exceeds 1280 ms.

8.4 UE UL carrier RRC reconfiguration delay

8.4.1 Introduction

The requirements in this clause apply for a UE being configured or deconfigured with a supplementary UL carrier or NR UL carrier.

8.4.2 UE UL carrier configuration delay requirement

When the UE receives a RRC message implying NR UL or supplementary UL carrier configuration, the UE shall be ready to start transmission on the newly configured carrier within $T_{UL_carrier_config}$ from the end of slot n.

Where

- Slot n is the last slot overlapping with the PDSCH containing the RRC command.
- $T_{UL_carrier_config}$ equals the maximum RRC procedure delay defined in clause 11.2 in TS 36.331 [16] if the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it equals the maximum RRC procedure delay defined in clause 12 in TS 38.331 [2].

8.4.3 UE UL carrier deconfiguration delay requirement

When the UE receives a RRC message implying NR UL or supplementary UL carrier deconfiguration RRC signalling, the UE shall stop UL signalling on the deconfigured UL carrier within $T_{UL_carrier_deconfig}$ from the end of slot n.

Where

- Slot n is the last slot overlapping with the PDSCH containing the RRC command.
- $T_{UL_carrier_deconfig}$ equals the maximum RRC procedure delay defined in clause 11.2 in TS 36.331 [16] if the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it equals the maximum RRC procedure delay defined in clause 12 in TS 38.331 [2].

8.5 Link Recovery Procedures

8.5.1 Introduction

The UE shall assess the downlink radio link quality of a serving cell based on the reference signal in the set $\overline{q}_0$ as specified in TS 38.213 [3] in order to detect beam failure on:

- PCell in SA, NR-DC, or NE-DC operation mode,
- PSCell in NR-DC and EN-DC operation mode,
- SCell in SA, NR-DC, NE-DC or EN-DC operation mode,
- Deactivated PSCell in NR-DC and EN-DC operation mode

The RS resource configurations in the set $\overline{q}_0$ on PCell, PSCell or deactivated PSCell (if configured with *bfd-and-RLM* with value *true*) can be periodic CSI-RS resources and/or SSBs. RS resource configuration in the set $\overline{q}_0$ on SCell shall be periodic CSI-RS. UE is not required to perform beam failure detection outside the active DL BWP. UE is not required to meet the requirements in clause 8.5.2 and 8.5.3 if UE does not have set $\overline{q}_0$. UE is not required to perform beam failure detection on a deactivated SCell, and also not required to perform beam failure detection on resources which is implicitly configured for a deactivated SCell. When more than 2 periodic CSI-RS resources on a CC are configured in the set $\overline{q}_0$ for current SCell or implicitly configured in the set $\overline{q}_0$ for other SCell, it is up to UE implementation to select two of CSI-RS resources in active BWP in current CC to perform beam failure detection. UE is not required to perform beam failure detection on a SCell on which $\overline{q}_1$ is not configured.

On each RS resource configuration in the set $\overline{q}_0$, the UE shall estimate the radio link quality and compare it to the threshold Q_{out_LR} for the purpose of accessing downlink radio link quality of the serving cell beams.

When a CORESET that the UE uses for monitoring PDCCH includes two TCI states and the UE is provided *sfnSchemePdcch* set to 'sfnSchemeA' or 'sfnSchemeB', the UE shall estimate a single downlink radio link quality to derive a single SNR and compare it to the single thresholds Q_{out_LR} for the purpose of accessing downlink radio link quality of the serving cell beams. How to compute the single SNR based on two active TCI states is up to UE implementation.

The threshold Q_{out_LR} is defined as the level at which the downlink radio level link of a given resource configuration on set $\overline{q}_0$ cannot be reliably received and shall correspond to the $BLER_{out}$ = 10% block error rate of a hypothetical PDCCH transmission. For SSB based beam failure detection, $Q_{out_LR_SSB}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 8.5.2.1-1. For CSI-RS based beam failure detection, $Q_{out_LR_CSI\text{-}RS}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 8.5.3.1-1.

Upon request the UE shall deliver configuration indexes from the set $\overline{q}_1$ as specified in TS 38.213 [3] , to higher layers, and the corresponding L1-RSRP measurement provided that the measured L1-RSRP is equal to or better than the threshold Q_{in_LR}, which is indicated by higher layer parameter *rsrp-ThresholdSSB*. The UE applies the Q_{in_LR} threshold to the L1-RSRP measurement obtained from an SSB. The UE applies the Q_{in_LR} threshold to the L1-RSRP measurement obtained for a CSI-RS resource after scaling a respective CSI-RS reception power with a value provided by higher layer parameter *powerControlOffsetSS*. The RS resource configurations in the set $\overline{q}_1$ can be periodic CSI-RS resources or SSBs or both SSB and CSI-RS resources. UE is not required to perform candidate beam detection outside the active DL BWP. UE is not required to perform candidate beam detection on a SCell on which $\overline{q}_1$ is not configured.

For a deactivated SCG, the UE may be provided via an RRC reconfiguration message with *tci-info* for PDCCH/PDSCH reception at the transition from deactivated SCG to activated SCG while the SCG is deactivated. After the reception of the RRC reconfiguration message the UE shall perform the BFD on the PSCellof the deactivated SCG using the TCI states accroding to *tci-info* specified in clause 6.3.2 in TS38.331[2].

8.5.1.1 Introduction of Requirement on Link Recovery Procedures for UE configured with relaxed measurement criteria

For the UE supports *bfd-Relaxation-r17* and configured with dedicated signaling *goodServingCellEvaluationBFD*, which is always configured to the UE when the network enables BFD relaxation for the UE as specified in TS 38.331[2], the relaxed requirements defined in clause 8.5.2.4 for SSB based beam failure detection and the relaxed requirements defined in clause 8.5.3.4 for CSI-RS based beam failure detection are allowed to apply to the relaxed BFD measurements on the serving cell after fulfilling the following conditions:

- for the serving cells in intra-band carrier aggregation configured with SSB-based or CSI-RS based RLM on SpCell together with CSI-RS based BFD on SCell, when
  - the good serving cell quality criterion defined in clause 5.7.13.2 of TS 38.331 [2] is fulfilled for the serving cell based on the measurements that are configured for SSB-based or CSI-RS based RLM on SpCell together with CSI-RS based BFD on Scell in the intra-band carrier aggregation if the *lowMobilityEvaluationConnected* is not configured, or
  - the UE is also configured with *lowMobilityEvaluationConnected* and both low mobility criterion defined in clause 5.7.13.1 of TS 38.331 [2] is fulfilled for a period of $T_{SearchDeltaP-Connected}$ and good serving cell quality criterion defined in clause 5.7.13.2 of TS 38.331 [2] is fulfilled for the serving cell based on the measurements that are configured for SSB-based or CSI-RS based RLM on SpCell together with CSI-RS based BFD on Scell in the intra-band carrier aggregation.
- for other serving cells, when
  - the good serving cell quality criterion defined in clause 5.7.13.2 of TS 38.331 [2] is fulfilled for the serving cell configured with BFD-RS if the *lowMobilityEvaluationConnected* is not configured, or
  - the UE is also configured with *lowMobilityEvaluationConnected*, and both low mobility criterion defined in clause 5.7.13.1 of TS 38.331 [2] is fulfilled for a period of $T_{SearchDeltaP-Connected}$ and good serving cell quality criterion defined in clause 5.7.13.2 of TS 38.331 [2] is fulfilled for the serving cell configured with BFD-RS.

otherwise, UE shall apply the requirements defined in clause 8.5.2.2 for SSB based beam failure detection and the requirements defined in clause 8.5.3.2 for CSI-RS based beam failure detection. Note that when multiple resources are configured on a serving cell for RLM or BFD evaluation, the good serving cell quality critierion is considered as fulfilled for the serving cell when any resource configured for the cell fulfills the good serving defined in clause 5.7.13.2 of TS 38.331 [2].

The scenario and RS resource configurations in the set $\bar{Q}_0$ defined in section 8.5.1 apply for this section.

The UE is no longer allowed to relax BFD measurements and apply the relaxed link recovery procedures provided that at least one of the following conditions is met:

- The timer *beamFailureDetectionTimer* is running.
- No DRX is used or DRX cycle is longer than 80ms

8.5.2 Requirements for SSB based beam failure detection

8.5.2.1 Introduction

The requirements in this clause apply for each SSB resource in the set $\bar{q}_0$ configured for a serving cell, provided that the SSB configured for beam failure detection is actually transmitted within the UE active DL BWP during the entire evaluation period specified in clause 8.5.2.2. The requirements in this clause could not be applicable if UE is required to perform beam failure detection on more than 1 serving cell per band.

Table 8.5.2.1-1: PDCCH transmission parameters for beam failure instance

Attribute	Value for BLER
DCI format	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	8
Ratio of hypothetical PDCCH RE energy to average SSS RE energy	0dB
Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	0dB
Bandwidth (PRBs)	24
Sub-carrier spacing (kHz)	Same as the SCS of RMSI CORESET
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed

8.5.2.2 Minimum requirement

UE shall be able to evaluate whether the downlink radio link quality on the configured SSB resource in set $\bar{q}_0$ estimated over the last $T_{Evaluate_BFD_SSB}$ ms period becomes worse than the threshold $Q_{out_LR_SSB}$ within $T_{Evaluate_BFD_SSB}$ ms period.

The value of $T_{Evaluate_BFD_SSB}$ is defined in Table 8.5.2.2-1 or Table 8.5.2.2-4 (deactivated PSCell) for FR1.

The value of $T_{Evaluate_BFD_SSB}$ is defined in Table 8.5.2.2-2 or Table 8.5.2.2-5 (deactivated PSCell) for FR2 with scaling factor N=8 for FR2-1 and N=12 for FR2-2, for FR2 power classes other than power class 6 or for FR2 class 6 when *highSpeedMeasFlagFR2-r17* is not configured.

The value of $T_{Evaluate_BFD_SSB}$ is defined in Table 8.5.2.2-3 for FR2 power class 6 UE configured with *highSpeedMeasFlagFR2-r17*.

When concurrent gaps are configured,

- P value for a BFD-RS resource to be measured is defined as
  - N_{total} / $N_{outside_MG}$ in FR1
  - $P_{sharing\ factor}$ * N_{total} / $N_{outside_MG}$ in FR2 with $N_{available}$ = 0
  - N_{total} / $N_{available}$ in FR2 with Navailable > 0
- For a window W of duration max($T_{L1,}$ MGRP_max), where MGRP max is the maximum MGRP across all configured per-UE measurement gaps and per-FR measurement gaps within the same FR as serving cell, and starting at the beginning of any BFD-RS resource occasion:
  - N_{total} is the total number of BFD-RS resource occasions within the window, including those overlapped with measurement gap occasions or SMTC occasions within the window, and
  - $N_{outside_MG}$ is the number of BFD-RS resource occasions that are not overlapped with any measurement gap occasion within the window W

- $N_{available}$ is the number of BFD-RS resource occasions that are not overlapped with any measurement gap occasion nor any SMTC occasion within the window W

- T_{L1} is periodicity of the target BFD-RS.

Otherwise, for a UE not supporting *concurrentMeasGap-r17* or when concurrent gaps are not configured,

For FR1,

- $P = \frac{1}{1-\frac{T_{SSB}}{xRP}}$, when in the monitored cell there are GAPs configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the SSB.

- P=1 when in the monitored cell there are no GAPs overlapping with any occasion of the SSB.

For FR2

- $P = \frac{1}{1-\frac{T_{SSB}}{T_{SMTCperiod}}}$, when BFD-RS resource is not overlapped with GAPs and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$).

- $P = P_{sharing\ factor}$, when the BFD-RS resource is not overlapped with GAP and the BFD-RS resource is fully overlapped with SMTC period ($T_{SSB} = T_{SMTCperiod}$).

- $P = \frac{1}{1-\frac{T_{SSB}}{xRP}-\frac{T_{SSB}}{T_{SMTCperiod}}}$, when the BFD-RS resource is partially overlapped with GAP and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with GAP and

  - $T_{SMTCperiod} \neq$ xRP or

  - $T_{SMTCperiod}$ = xRP and $T_{SSB} < 0.5*T_{SMTCperiod}$

- $P = \frac{P_{sharing\ factor}}{1-\frac{T_{SSB}}{xRP}}$, when the BFD-RS resource is partially overlapped with GAP and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with GAP and $T_{SMTCperiod}$ = xRP and $T_{SSB} = 0.5*T_{SMTCperiod}$

- $P = \frac{1}{1-\frac{T_{SSB}}{T_{SMTCperiod}}}$, when the BFD-RS resource is partially overlapped with GAP (T_{SSB} <xRP) and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with GAP.

- $P = \frac{P_{sharing\ factor}}{1-\frac{T_{SSB}}{xRP}}$, when the BFD-RS resource is partially overlapped with GAP and the BFD-RS resource is fully overlapped with SMTC occasion ($T_{SSB} = T_{SMTCperiod}$) and SMTC occasion is partially overlapped with GAP ($T_{SMTCperiod} <$ xRP)

where,

- $P_{sharing\ factor}$ = 1, if the BFD-RS resource outside gap is

  - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and,

  - not overlapped by the RSSI symbols indicated by *ss-RSSI-Measurement* and 1 data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured.

- $P_{sharing\ factor}$ = 3, otherwise.

- If the high layer in TS 38.331 [2] signaling of *smtc2* is configured, $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc2*; Otherwise $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc1*. $T_{SMTCperiod}$ is the shortest SMTC period among all CCs in the same FR2 band, given the SMTC offset of all CCs in FR2 provided the same offset.

- When a measurement gap is configured and the measurement gap is not NCSG,

  - a BFD-RS resource or an SMTC occasion is considered to be overlapped with the GAP if it overlaps a measurement gap occasion, and

  - xRP = MGRP

- Otherwise, when NCSG measurement gap is configured,

  - a BFD-RS resource or an SMTC occasion is considered to be overlapped with the GAP if

    - it overlaps the VIL1 or VIL2 of NCSG, or

      it overlaps the ML of NCSG in FR2, and there exists a target carrier to be measured within NCSG that is intra-frequency carrier or inter-frequency carrier in the same band as the serving cell, or inter-frequency carrier in different band as the serving cell and UE does not support IBM between the target carrier and the serving cell,

  - and

    - xRP = VIRP

- If the UE is configured with Pre-MG, a BFD-RS resource or an SMTC occasion is only considered to be overlapped by the Pre-MG if the Pre-MG is activated.

- When concurrent gaps are configured, a BFD-RS or an SMTC occasion is not considered to be overlapped by a gap occasion if the gap occasion is dropped according to 9.1.8.

Longer evaluation period would be expected if the combination of BFD-RS resource, SMTC occasion and GAP configurations does not meet pervious conditionsFor either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer BFD evaluation period would be expected during the period $T_{identify_CGI,E\text{-}UTRAN}$ when the UE is requested to decode an LTE CGI.

Table 8.5.2.2-1: Evaluation period $T_{Evaluate_BFD_SSB}$ for FR1

Configuration	$T_{Evaluate_BFD_SSB}$ (ms)
no DRX	$Max(50, Ceil(5 \times P) \times T_{SSB})$
DRX cycle ≤ 320ms	$Max(50, Ceil(7.5 \times P) \times Max(T_{DRX},T_{SSB}))$
DRX cycle > 320ms	$Ceil(5 \times P) \times T_{DRX}$
Note: T_{SSB} is the periodicity of SSB in the set $\overline{q}_0$. T_{DRX} is the DRX cycle length.	

Table 8.5.2.2-2: Evaluation period $T_{Evaluate_BFD_SSB}$ for FR2

Configuration	$T_{Evaluate_BFD_SSB}$ (ms)
no DRX	$Max(50, Ceil(5 \times P \times N) \times T_{SSB})$
DRX cycle ≤ 320ms	$Max(50, Ceil(7.5 \times P \times N) \times Max(T_{DRX},T_{SSB}))$
DRX cycle > 320ms	$Ceil(5 \times P \times N) \times T_{DRX}$
Note: T_{SSB} is the periodicity of SSB in the set $\overline{q}_0$. T_{DRX} is the DRX cycle length.	

Table 8.5.2.2-3: Evaluation period $T_{Evaluate_BFD_SSB}$ for FR2 power class 6 UE configured with *highSpeedMeasFlagFR2-r17*

Configuration	$T_{Evaluate_BFD_SSB}$ (ms)
no DRX	$Max(50, Ceil(5 \times P \times N^{Note2}) \times T_{SSB})$
DRX cycle ≤ 80ms	$Max(50, Ceil(7.5 \times P \times N^{Note2}) \times Max(T_{DRX},T_{SSB}))$

Note 1:	T_{SSB} is the periodicity of SSB in the set $\overline{q}_0$. T_{DRX} is the DRX cycle length.
Note 2:	scaling factor N=2 when *highSpeedMeasFlagFR2-r17* is configured to set1 or scaling factor N=6 when *highSpeedMeasFlagFR2-r17* is configured to set2.

Table 8.5.2.2-4: Evaluation period $T_{Evaluate_BFD_SSB}$ for deactivated PSCell in FR1

Configuration	$T_{Evaluate_BFD_SSB}$ (ms)
no DRX	Ceil(5 × P) × measCyclePscell
DRX cycle ≤ 320ms	Ceil(7.5 × P) × Max(measCyclePscell, T_{DRX})
DRX cycle > 320ms	Ceil(5 × P) × Max(measCyclePscell, T_{DRX})
Note: DRX cycle is the configured DRX cycle of the PSCell. measCyclePSCell is the measurement cycle length of the deactivated PSCell.	

Table 8.5.2.2-5: Evaluation period $T_{Evaluate_BFD_SSB}$ for deactivated PSCell in FR2

Configuration	$T_{Evaluate_BFD_SSB}$ (ms)
no DRX	Ceil(5 × P × N) × measCyclePscell
DRX cycle ≤ 320ms	Ceil(7.5 × P × N) × Max(measCyclePscell, T_{DRX})
DRX cycle > 320ms	Ceil(5 × P × N) × Max(measCyclePscell, T_{DRX})
Note: DRX cycle is the configured DRX cycle of the PSCell. measCyclePSCell is the measurement cycle length of the deactivated PSCell.	

8.5.2.3 Measurement restriction for SSB based beam failure detection

The UE is required to be capable of measuring SSB for BFD without measurement gaps. The UE is required to perform the SSB measurements with measurement restrictions as described in the following scenarios.

For FR1, when the SSB for BFD measurement is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for BFD measurement without any restriction;
- If SSB and CSI-RS have different SCS,
  - If UE supports *simultaneousRxDataSSB-DiffNumerology*, UE shall be able to measure the SSB for BFD measurement without any restriction;
  - If UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both SSB for BFD measurement and CSI-RS. Longer measurement period for SSB based BFD measurement is expected, and no requirements are defined.

For FR2, when the SSB for BFD measurement on one CC is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both SSB for BFD measurement and CSI-RS. Longer measurement period for SSB based BFD measurement is expected, and no requirements are defined.

For FR2, when the SSB for BFD measurement on one CC is in the same or adjacent OFDM symbol as SSB from cell with additional PCI for L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both SSBs. Longer measurement period for SSB based BFD is expected, and no requirements are defined.

For FR2, if the network configures same or mixed numerology between SSB for BFD measurement on one FR2 band and CSI-RS for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement on the other FR2 band, UE shall be able to perform the related SSB based measurements in one band without any measurement restrictions on the other band, provided that UE is capable of independent beam management on this FR2 band pair.

8.5.2.4 Minimum requirement of SSB based beam failure detection for UE fulfilling relaxed measurement criteria

This clause contains minimum requirements for SSB based relaxed beam failure detection.

UE shall be able to evaluate whether the downlink radio link quality on the configured SSB resource in set $\bar{q}_0$ estimated over the last $T_{Evaluate_BFD_SSB_Relax}$ ms period becomes worse than the threshold $Q_{out_LR_SSB}$ within $T_{Evaluate_BFD_SSB_Relax}$ ms period.

The value of $T_{Evaluate_BFD_SSB_Relax}$ is defined in Table 8.5.2.4-1 for FR1.

The value of $T_{Evaluate_BFD_SSB_Relax}$ is defined in Table 8.5.2.4-2 for FR2 with scaling factor N=8

The value of P is defined in clause 8.5.2.2.

Longer evaluation period would be expected if the combination of BFD-RS resource, SMTC occasion and measurement gap configurations does not meet pervious conditions.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer BFD evaluation period would be expected during the period $T_{identify_CGI,E-UTRAN}$ when the UE is requested to decode an LTE CGI.

Table 8.5.2.4-1: Evaluation period $T_{Evaluate_BFD_SSB_Relax}$ for FR1

Configuration	$T_{Evaluate_BFD_SSB_Relax}$ (ms)
$Max(T_{DRX}, T_{SSB}) \le 80$ ms	$Max(50 \times K3, Ceil(7.5 \times K1 \times P) \times Max(T_{DRX},T_{SSB}))$
$80ms < Max(T_{DRX}, T_{SSB}) \le 160$ ms	$Max(50, Ceil(7.5 \times P) \times Max(T_{DRX},T_{SSB}))$
Note 1: T_{SSB} is the periodicity of SSB in the set $\bar{q}_0$. T_{DRX} is the DRX cycle length and no longer than 80ms. Note 2: K1 is the relaxation factor. K1 = 2 for $40ms < Max(T_{DRX}, T_{SSB}) \le 80$ ms, K1 = 4 for $Max(T_{DRX}, T_{SSB}) \le 40$ ms Note 3: K3 is the relaxation factor for the lower bound. K3 = K1, if $1 < K1 \le 2$; K3 = 1 otherwise.	

Table 8.5.2.4-2: Evaluation period $T_{Evaluate_BFD_SSB_Relax}$ for FR2

Configuration	$T_{Evaluate_BFD_SSB_Relax}$ (ms)
$Mas(T_{DRX}, T_{SSB}) \le 80$ ms	$Max(50 \times K4, Ceil(7.5 \times K2 \times P \times N) \times Max(T_{DRX},T_{SSB}))$
$80ms < Max(T_{DRX}, T_{SSB}) \le 160$ ms	$Max(50, Ceil(7.5 \times P \times N) \times Max(T_{DRX},T_{SSB}))$
Note 1: T_{SSB} is the periodicity of SSB in the set $\bar{q}_0$. T_{DRX} is the DRX cycle length and no longer than 80ms. Note 2: K2 is the relaxation factor. K2 = 2. Note 3: K4 is the relaxation factor for the lower bound. K4 = K2, if $1 < K2 \le 2$; K4 = 1 otherwise.	

8.5.3 Requirements for CSI-RS based beam failure detection

8.5.3.1 Introduction

The requirements in this clause apply for each CSI-RS resource in the set $\bar{q}_0$ of resource configurations for a serving cell, provided that the CSI-RS resource(s) in set $\bar{q}_0$ for beam failure detection are actually transmitted within the UE active DL BWP during the entire evaluation period specified in clause 8.5.3.2. UE is not expected to perform beam failure detection measurements on the CSI-RS configured for BFD if the CSI-RS is not QCL-ed, with QCL-TypeD when applicable, with the RS in the active TCI state of any CORESET configured in the UE active BWP. The

requirements in this clause apply when UE is required to perform beam failure detection on no more than 1 serving cell per band.

Table 8.5.3.1-1: PDCCH transmission parameters for beam failure instance

Attribute	Value for BLER
DCI format	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	8
Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	0dB
Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	0dB
Bandwidth (PRBs)	48
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed

8.5.3.2 Minimum requirement

UE shall be able to evaluate whether the downlink radio link quality on the CSI-RS resource in set $\bar{q}_0$ estimated over the last $T_{Evaluate_BFD_CSI-RS}$ ms period becomes worse than the threshold $Q_{out_LR_CSI-RS}$ within $T_{Evaluate_BFD_CSI-RS}$ ms period.

The value of $T_{Evaluate_BFD_CSI-RS}$ is defined in Table 8.5.3.2-1 or Table 8.5.3.2-3 (deactivated PSCell) for FR1.

The value of $T_{Evaluate_BFD_CSI-RS}$ is defined in Table 8.5.3.2-2 or Table 8.5.3.2-4 (deactivated PSCell) for FR2 with N=1. The requirements of $T_{Evaluate_BFD_CSI-RS}$ apply provided that the CSI-RS for BFD is not in a resource set configured with repetition ON. The requirements shall not apply when the CSI-RS resource in the active TCI state of CORESET is the same CSI-RS resource for BFD and the TCI state information of the CSI-RS resource is not given, wherein the TCI state information means QCL Type-D to SSB for L1-RSRP or CSI-RS with repetition ON.

When concurrent gaps are configured,

- P value for a BFD-RS resource to be measured is defined as
  - N_{total} / $N_{outside_MG}$ in FR1
  - $P_{sharing\ factor}$ * N_{total} / $N_{outside_MG}$ in FR2 with $N_{available}$ = 0
  - N_{total} / $N_{available}$ in FR2 with Navailable > 0
- For a window W of duration max($T_{L1,}$ MGRP_max), where MGRP max is the maximum MGRP across all configured per-UE measurement gaps and per-FR measurement gaps within the same FR as serving cell, and starting at the beginning of any BFD-RS resource occasion:
  - N_{total} is the total number of BFD-RS resource occasions within the window, including those overlapped with measurement gap occasions or SMTC occasions within the window, and
  - $N_{outside_MG}$ is the number of BFD-RS resource occasions that are not overlapped with any measurement gap occasion within the window W
  - $N_{available}$ is the number of BFD-RS resource occasions that are not overlapped with any measurement gap occasion nor any SMTC occasion within the window W

    T_{L1} is periodicity of the target BFD-RS.

Otherwise, for a UE not supporting *concurrentMeasGap-r17* or when concurrent gaps are not configured,

For FR1,

- $P = \frac{1}{1-\frac{T_{CSI-RS}}{MGRP}}$, when in the monitored cell there are GAPs configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the CSI-RS.
- P = 1 when in the monitored cell there are no GAPs overlapping with any occasion of the CSI-RS.

For FR2,

- P = 1, when the BFD-RS resource is not overlapped with GAP and also not overlapped with SMTC occasion.
- $P = \frac{1}{1-\frac{T_{CSI-RS}}{xRP}}$, when the BFD-RS resource is partially overlapped with GAP and the BFD-RS resource is not overlapped with SMTC occasion (T_{CSI-RS} < xRP)
- $P = \frac{1}{1-\frac{T_{CSI-RS}}{T_{SMTCperiod}}}$, when the BFD-RS resource is not overlapped with GAP and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$).
- $P = P_{sharing\ factor}$, when the BFD-RS resource is not overlapped with GAP and the BFD-RS resource is fully overlapped with SMTC occasion ($T_{CSI-RS} = T_{SMTCperiod}$).
- $P = \frac{1}{1-\frac{T_{CSI-RS}}{xRP}-\frac{T_{CSI-RS}}{T_{SMTCperiod}}}$, when the BFD-RS resource is partially overlapped with GAP and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with GAP and
  - $T_{SMTCperiod} \neq$ xRP or
  - $T_{SMTCperiod}$ = xGRP and $T_{CSI-RS} < 0.5 \times T_{SMTCperiod}$
- $P = \frac{P_{sharing\ factor}}{1-\frac{T_{CSI-RS}}{xRP}}$, when the BFD-RS resource is partially overlapped with GAP and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with GAP and $T_{SMTCperiod}$ = xRP and $T_{CSI-RS} = 0.5 \times T_{SMTCperiod}$
- $P = \frac{1}{1-\frac{T_{CSI-RS}}{T_{SMTCperiod}}}$, when the BFD-RS resource is partially overlapped with GAP (T_{CSI-RS} < xRP) and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with GAP.
- $P = \frac{P_{sharing\ factor}}{1-\frac{T_{CSI-RS}}{xRP}}$, when the BFD-RS resource is partially overlapped with [measurement gap] and the BFD-RS resource is fully overlapped with SMTC occasion ($T_{CSI-RS} = T_{SMTCperiod}$) and SMTC occasion is partially overlapped with GAP ($T_{SMTCperiod}$ < xRP)

where,

- $P_{sharing\ factor}$ = 1, if the BFD-RS resource outside gap is
  - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and,
  - not overlapped by the RSSI symbols indicated by *ss-RSSI-Measurement* and 1 data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured.
- $P_{sharing\ factor}$ = 3, otherwise.
- If the high layer in TS 38.331 [2] signaling of *smtc2* is configured, $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc2*; Otherwise $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc1*. $T_{SMTCperiod}$ is the shortest SMTC period among all CCs in the same FR2 band, provided the SMTC offset of all CCs in FR2 have the same offset.

- When a measurement gap is configured and the measurement gap is not NCSG,
  - a BFD-RS resource or an SMTC occasion is considered to be overlapped with the GAP if it overlaps a measurement gap occasion, and
  - xRP = MGRP
- Otherwise, when NCSG measurement gap is configured,
  - a BFD-RS resource or an SMTC occasion is considered to be overlapped with the GAP if
    - it overlaps the VIL1 or VIL2 of NCSG, or
    - it overlaps the ML of NCSG in FR2, and there exists a target carrier to be measured within NCSG that is intra-frequency carrier or inter-frequency carrier in the same band as the serving cell, or inter-frequency carrier in different band as the serving cell and UE does not support IBM between the target carrier and the serving cell,
  - and
    - xRP = VIRP
- If the UE is configured with Pre-MG, a BFD-RS resource or an SMTC occasion is only considered to be overlapped by the Pre-MG if the Pre-MG is activated.
- When concurrent gaps are configured, a BFD-RS or an SMTC occasion is not considered to be overlapped by a gap occasion if the gap occasion is dropped according to 9.1.8.

Note: The overlap between CSI-RS for BFD and SMTC means that CSI-RS for BFD is within the SMTC window duration.

Longer evaluation period would be expected if the combination of the BFD-RS resource, SMTC occasion and GAP configurations does not meet pervious conditions.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer BFD evaluation period would be expected during the period $T_{identify_CGI,E\text{-}UTRAN}$ when the UE is requested to decode an LTE CGI.

The values of M_{BFD} used in Table 8.5.3.2-1 and Table 8.5.3.2-2 are defined as

- M_{BFD} = 10, if the CSI-RS resource(s) in set $\bar{q}_0$ used for BFD is transmitted with Density = 3 and over the bandwidth $\geqslant$ 24 PRBs.

The values of P_{BFD} used in Table 8.5.3.2-1 and Table 8.5.3.2-2 are defined as

For each CSI-RS resource in the set $\bar{q}_0$ configured for PCell or PSCell in EN-DC or NE-DC or SA; or PCell in NR-DC

- P_{BFD} = 1.

For each CSI-RS resource in the set $\bar{q}_0$ configured for PSCell in NR-DC

- P_{BFD} = 2 if UE is configured for beam failure detection on SCell, 1 otherwise.

For each CSI-RS resource in the set $\bar{q}_0$ configured for a SCell

- P_{BFD} = Z in EN-DC or NE-DC or SA.
- P_{BFD} = 2* Z in NR-DC.
  - Where Z is the number of band(s) on which UE is performing beam failure detection only for SCell.

Table 8.5.3.2-1: Evaluation period $T_{Evaluate_BFD_CSI\text{-}RS}$ for FR1

Configuration	$T_{Evaluate_BFD_CSI\text{-}RS}$ (ms)
no DRX	$Max(50, Ceil(M_{BFD} \times P \times P_{BFD}) \times T_{CSI\text{-}RS})$
DRX cycle ≤ 320ms	$Max(50, Ceil(1.5 \times M_{BFD} \times P \times P_{BFD}) \times Max(T_{DRX}, T_{CSI\text{-}RS}))$
DRX cycle > 320ms	$Ceil(M_{BFD} \times P \times P_{BFD}) \times T_{DRX}$
Note: $T_{CSI\text{-}RS}$ is the periodicity of CSI-RS resource in the set $\overline{q}_0$. T_{DRX} is the DRX cycle length.	

Table 8.5.3.2-2: Evaluation period $T_{Evaluate_BFD_CSI\text{-}RS}$ for FR2

Configuration	$T_{Evaluate_BFD_CSI\text{-}RS}$ (ms)
no DRX	$Max(50, Ceil(M_{BFD} \times P \times N \times P_{BFD}) \times T_{CSI\text{-}RS})$
DRX cycle ≤ 320ms	$Max(50, Ceil(1.5 \times M_{BFD} \times P \times N \times P_{BFD}) \times Max(T_{DRX}, T_{CSI\text{-}RS}))$
DRX cycle > 320ms	$Ceil(M_{BFD} \times P \times N \times P_{BFD}) \times T_{DRX}$
Note: $T_{CSI\text{-}RS}$ is the periodicity of CSI-RS resource in the set $\overline{q}_0$. T_{DRX} is the DRX cycle length.	

Table 8.5.3.2-3: Evaluation period $T_{Evaluate_BFD_CSI\text{-}RS}$ for deactivated PSCell in FR1

Configuration	$T_{Evaluate_BFD_CSI\text{-}RS}$ (ms)
no DRX	$Ceil(M_{BFD} \times P \times P_{BFD}) \times measCyclePscell$
DRX cycle ≤ 320ms	$Ceil(1.5 \times M_{BFD} \times P \times P_{BFD}) \times Max(T_{DRX}, measCyclePscell)$
DRX cycle > 320ms	$Ceil(M_{BFD} \times P \times P_{BFD}) \times Max(T_{DRX}, measCyclePscell)$
Note: DRX cycle is the configured DRX cycle of the PSCell. measCyclePSCell is the measurement cycle length of the deactivated PSCell.	

Table 8.5.3.2-4: Evaluation period $T_{Evaluate_BFD_CSI\text{-}RS}$ for deactivated PSCell in FR2

Configuration	$T_{Evaluate_BFD_CSI\text{-}RS}$ (ms)
no DRX	$Ceil(M_{BFD} \times P \times N \times P_{BFD}) \times measCyclePscell$
DRX cycle ≤ 320ms	$Ceil(1.5 \times M_{BFD} \times P \times N \times P_{BFD}) \times Max(T_{DRX}, measCyclePscell)$
DRX cycle > 320ms	$Ceil(M_{BFD} \times P \times N \times P_{BFD}) \times Max(T_{DRX}, measCyclePscell)$
Note: DRX cycle is the configured DRX cycle of the PSCell. measCyclePSCell is the measurement cycle length of the deactivated PSCell.	

8.5.3.3 Measurement restrictions for CSI-RS beam failure detection

The SSB mentioned in this clause can be associated with either the serving cell PCI or a PCI different from serving cell PCI.

The UE is required to be capable of measuring CSI-RS for BFD without measurement gaps. The UE is required to perform the CSI-RS measurements with measurement restrictions as described in the following scenarios.

For both FR1 and FR2, when the CSI-RS for BFD measurement is in the same OFDM symbol as SSB for RLM, BFD, CBD or L1-RSRP measurement, UE is not required to receive CSI-RS for BFD measurement in the PRBs that overlap with an SSB.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has same SCS than CSI-RS for BFD measurement, the UE shall be able to perform CSI-RS measurement without restrictions.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has different SCS than CSI-RS for BFD measurement, the UE shall be able to perform CSI-RS measurement with restrictions according to its capabilities:

- If the UE supports *simultaneousRxDataSSB-DiffNumerology* the UE shall be able to perform CSI-RS measurement without restrictions.

- If the UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both CSI-RS for BFD measurement and SSB. Longer measurement period for CSI-RS based BFD measurement is expected, and no requirements are defined.

For FR1, when the CSI-RS for BFD measurement is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement, UE shall be able to measure the CSI-RS for BFD measurement without any restriction.

For FR2, when the CSI-RS for BFD measurement on one CC is in the same OFDM symbol as SSB for RLM, BFD or L1-RSRP measurement on the same CC or different CCs in the same band, or in the same symbol as SSB for CBD measurement on the same CC or different CCs in the same band when beam failure is detected, UE is required to measure one of but not both CSI-RS for BFD measurement and SSB. Longer measurement period for CSI-RS based BFD measurement is expected, and no requirements are defined.

For FR2, when the CSI-RS for BFD measurement on one CC is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band,

- In the following cases, UE is required to measure one of but not both CSI-RS for BFD measurement and the other CSI-RS. Longer measurement period for CSI-RS based BFD measurement is expected, and no requirements are defined.

  - The CSI-RS for BFD measurement or the other CSI-RS in a resource set configured with repetition ON, or

  - The other CSI-RS is configured in set $\overline{q}_1$ and beam failure is detected, or

  - The two CSI-RS-es are not QCL-ed w.r.t. QCL-TypeD, or the QCL information is not known to UE,

- Otherwise, UE shall be able to measure the CSI-RS for BFD measurement without any restriction.

8.5.3.4 Minimum requirement of CSI-RS based beam failure detection for UE fulfilling relaxed measurement criteria

This clause contains the minimum requirements for CSI-RS based relaxed beam failure detection.

UE shall be able to evaluate whether the downlink radio link quality on the CSI-RS resource in set $\overline{q}_0$ estimated over the last $T_{Evaluate_BFD_CSI-RS_Relax}$ ms period becomes worse than the threshold $Q_{out_LR_CSI-RS}$ within $T_{Evaluate_BFD_CSI-RS_Relax}$ ms period.

The value of $T_{Evaluate_BFD_CSI-RS_Relax}$ is defined in Table 8.5.3.4-1 for FR1.

The value of $T_{Evaluate_BFD_CSI-RS_Relax}$ is defined in Table 8.5.3.4-2 for FR2 with N=1.

The values of P, M_{BFD} and P_{BFD} is defined in clause 8.5.3.2.

Longer evaluation period would be expected if the combination of RLM-RS resource, SMTC occasion and measurement gap configurations does not meet previous conditions.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI,E-UTRAN}$ when the UE is requested to decode an LTE CGI.

Table 8.5.3.4-1: Evaluation period $T_{Evaluate_BFD_CSI-RS_Relax}$ for FR1

Configuration	$T_{Evaluate_BFD_CSI-RS\ Relax}$ (ms)
$Max(T_{DRX}, T_{CSI-RS}) \le 80$ ms	$Max(50 \times K3, Ceil(K1 \times 1.5 \times M_{BFD} \times P \times P_{BFD}) \times Max(T_{DRX}, T_{CSI-RS}))$
Note 1: T_{CSI-RS} is the periodicity of CSI-RS resource in the set $\overline{q}_0$. T_{DRX} is the DRX cycle length and no longer than 80ms. Note 2: K1 is the relaxation factor. K1 = 2 for 40 ms < $MAX(T_{DRX}, T_{CSI-RS}) \le 80$ ms, K1 = 4 for $MAX(T_{DRX}, T_{CSI-RS}) \le 40$ ms Note 3: K3 is the relaxation factor for the lower bound. K3 = K1, if 1 < K1 ≤ 2; K3 = 1 otherwise.	

Table 8.5.3.4-2: Evaluation period $T_{Evaluate_BFD_CSI\text{-}RS_Relax}$ for FR2

Configuration	$T_{Evaluate_BFD_CSI\text{-}RS_Relax}$ (ms)
$Max(T_{DRX}, T_{CSI\text{-}RS}) \leq 80ms$	$Max(50 \times K4, Ceil(K2 \times 1.5 \times M_{BFD} \times P \times N \times P_{BFD}) \times Max(T_{DRX}, T_{CSI\text{-}RS}))$
Note 1: $T_{CSI\text{-}RS}$ is the periodicity of CSI-RS resource in the set $\overline{q}_0$. T_{DRX} is the DRX cycle length and no longer than 80ms. Note 2: K2 is the relaxation factor. K2 = 2 Note 3: K4 is the relaxation factor for the lower bound. K4 = K2, if 1 < K2 ≤ 2; K4 = 1 otherwise.	

8.5.4 Minimum requirement for L1 indication

When the radio link quality on all the RS resources in set $\overline{q}_0$ is worse than Q_{out_LR}, layer 1 of the UE shall send a beam failure instance indication to the higher layers

The beam failure instance evaluation for the RS resources in set $\overline{q}_0$ shall be performed as specified in clause 6 in TS 38.213 [3]. Two successive indications from layer 1 shall be separated by at least $T_{Indication_interval_BFD}$.

When DRX is not used, $T_{Indication_interval_BFD}$ is max(2ms, $T_{SSB\text{-}RS,M}$)) or max(2ms, $T_{CSI\text{-}RS,M}$), where $T_{SSB\text{-}RS,M}$ and $T_{CSI\text{-}RS,M}$ is the shortest periodicity of all RS resources in set $\overline{q}_0$ for the accessed cell, corresponding to either the shortest periodicity of the SSB in the set $\overline{q}_0$ or CSI-RS resource in the set $\overline{q}_0$.

When DRX is used, for SSB based link quality measurement,

- $T_{Indication_interval_BFD}$ = Max(1.5 × DRX_cycle_length, 1.5 × $T_{SSB\text{-}RS,M}$), if DRX_cycle_length ≤ 320ms,
- $T_{Indication_interval_BFD}$ = DRX_cycle_length, if DRX_cycle_length > 320ms.

When DRX is used, for CSI-RS based link quality measurement,

- $T_{Indication_interval_BFD}$ = Max(1.5 × DRX_cycle_length, 1.5 × $T_{CSI\text{-}RS,M}$), if DRX_cycle_length ≤ 320ms,
- $T_{Indication_interval_BFD}$ = DRX_cycle_length, if DRX_cycle_length > 320ms.

For deactivated PSCell,

when DRX is not used, $T_{Indication_interval_BFD}$ is Max (2ms, *measCyclePSCell*).

when DRX is used, for SSB based link quality measurement,

- $T_{Indication_interval_BFD}$ = Max (1.5 × DRX_cycle_length, 1.5 × *measCyclePSCell*), if DRX_cycle_length ≤ 320ms,
- $T_{Indication_interval_BFD}$ = Max (DRX_cycle_length, *measCyclePSCell*), if DRX_cycle_length > 320ms.

When DRX is used, for CSI-RS based link quality measurement,

- $T_{Indication_interval_BFD}$ = Max (1.5 × DRX_cycle_length, 1.5 × *measCyclePSCell*), if DRX_cycle_length ≤ 320ms,
- $T_{Indication_interval_BFD}$ = Max (DRX_cycle_length, *measCyclePSCell*), if DRX_cycle_length > 320ms.

8.5.5 Requirements for SSB based candidate beam detection

8.5.5.1 Introduction

The requirements in this clause apply for each SSB resource in the set $\bar{q}_1$ configured for a serving cell, provided that the SSBs configured for candidate beam detection are actually transmitted within UE active DL BWP during the entire evaluation period specified in clause 8.5.5.2. The requirements in this clause apply when UE is required to perform beam failure detection on no more than 1 serving cell per band.

8.5.5.2 Minimum requirement

Upon request the UE shall be able to evaluate whether the L1-RSRP measured on the configured SSB resource in set $\bar{q}_1$ estimated over the last $T_{Evaluate_CBD_SSB}$ ms period becomes better than the threshold Q_{in_LR} provided SSB_RP and SSB Ês/Iot are according to Annex Table B.2.4.1 for a corresponding band.

The UE shall monitor the configured SSB resources using the evaluation period in table 8.5.5.2-1 and 8.5.5.2-2 corresponding to the non-DRX mode, if the configured DRX cycle ≤ 320ms.

The value of $T_{Evaluate_CBD_SSB}$ is defined in Table 8.5.5.2-1 for FR1.

The value of $T_{Evaluate_CBD_SSB}$ is defined in Table 8.5.5.2-2 for FR2 with scaling factor N=8 for FR2-1 and N=12 for FR2-2.

When concurrent gaps are configured,

- P value for a CBD-RS resource to be measured is defined as
  - N_{total} / $N_{outside_MG}$ in FR1
  - $P_{sharing\ factor}$ * N_{total} / $N_{outside_MG}$ in FR2 with $N_{available}$ = 0
  - N_{total} / $N_{available}$ in FR2 with Navailable > 0
- For a window W of duration max($T_{L1,}$ MGRP_max), where MGRP max is the maximum MGRP across all configured per-UE measurement gaps and per-FR measurement gaps within the same FR as serving cell, and starting at the beginning of any CBD-RS resource occasion:
  - N_{total} is the total number of CBD-RS resource occasions within the window, including those overlapped with measurement gap occasions or SMTC occasions within the window, and
  - $N_{outside_MG}$ is the number of CBD-RS resource occasions that are not overlapped with any measurement gap occasion within the window W
  - $N_{available}$ is the number of CBD-RS resource occasions that are not overlapped with any measurement gap occasion nor any SMTC occasion within the window W
  - T_{L1} is periodicity of the target CBD-RS.

Otherwise, for a UE not supporting *concurrentMeasGap-r17* or when concurrent gaps are not configured,

For FR1,

- $P = \frac{1}{1-\frac{T_{SSB}}{xRP}}$, when in the monitored cell there are GAPs configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the SSB,
- P = 1 when in the monitored cell there are no GAPs overlapping with any occasion of the SSB.

For FR2,

- $P = \frac{1}{1-\frac{T_{SSB}}{T_{SMTCperiod}}}$, when candidate beam detection RS is not overlapped with GAP and candidate beam detection RS is partially overlapped with SMTC occasion (T_{SSB} < $T_{SMTCperiod}$).

- P is $P_{\text{sharing factor}}$, when candidate beam detection RS is not overlapped with GAP and candidate beam detection RS is fully overlapped with SMTC period ($T_{SSB} = T_{SMTCperiod}$).

- $P = \frac{1}{1-\frac{T_{SSB}}{xRP}-\frac{T_{SSB}}{T_{SMTCperiod}}}$, when candidate beam detection RS is partially overlapped with GAP and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with GAP and

  - $T_{SMTCperiod} \neq$ xRP or

  - $T_{SMTCperiod}$ = xRP and $T_{SSB} < 0.5 \times T_{SMTCperiod}$

- $P = \frac{P_{sharing\ factor}}{1-\frac{T_{SSB}}{xRP}}$, when candidate beam detection RS is partially overlapped with GAP and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with GAP and $T_{SMTCperiod}$ = xRP and $T_{SSB} = 0.5 \times T_{SMTCperiod}$

- $P = \frac{1}{1-\frac{T_{SSB}}{T_{SMTCperiod}}}$, when candidate beam detection RS is partially overlapped with GAP and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with GAP

- $P = \frac{P_{sharing\ factor}}{1-\frac{T_{SSB}}{xRP}}$, when candidate beam detection RS is partially overlapped with [measurement gap] and candidate beam detection RS is fully overlapped with SMTC occasion ($T_{SSB} = T_{SMTCperiod}$) and SMTC occasion is partially overlapped with GAP ($T_{SMTCperiod}$ < xRP)

where,

- $P_{\text{sharing factor}}$ = 1, if the CBD-RS resource outside gap is

  - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and,

  - not overlapped by the RSSI symbols indicated by *ss-RSSI-Measurement* and 1 data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured.

- $P_{\text{sharing factor}}$ = 3, otherwise.

- If the high layer in TS 38.331 [2] signaling of *smtc2* is present, $T_{SMTCperiod}$ follows *smtc2*; Otherwise $T_{SMTCperiod}$ follows *smtc1*. $T_{SMTCperiod}$ is the shortest SMTC period among all CCs in the same FR2 band, provided the SMTC offset of all CCs in FR2 have the same offset.

- If the UE is configured with Pre-MG, a CBD-RS resource or an SMTC occasion is only considered to be overlapped by the Pre-MG if the Pre-MG is activated.

- When a measurement gap is configured and the measurement gap is not NCSG,

  - a CBD-RS resource or an SMTC occasion is considered to be overlapped with the GAP if it overlaps a measurement gap occasion, and

  - xRP = MGRP

- Otherwise, when NCSG is measurement gap configured,

  - a CBD-RS resource or an SMTC occasion is considered to be overlapped with the GAP if

    - it overlaps the VIL1 or VIL2 of NCSG, or

    - it overlaps the ML of NCSG in FR2, and there exists a target carrier to be measured within NCSG that is intra-frequency carrier or inter-frequency carrier in the same band as the serving cell, or inter-frequency

carrier in different band as the serving cell and UE does not support IBM between the target carrier and the serving cell,

- and
  - xRP = VIRP

- When concurrent gaps are configured, a CBD-RS or an SMTC occasion is not considered to be overlapped by a gap occasion if the gap occasion is dropped according to 9.1.8.

Longer evaluation period would be expected if the combination of the CBD-RS resource, SMTC occasion and GAP configurations does not meet pervious conditions.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer CBD evaluation period would be expected during the period $T_{identify_CGI,E\text{-}UTRAN}$ when the UE is requested to decode an LTE CGI.

The values of P_{CBD} used in Table 8.5.5.2-1 and Table 8.5.5.2-2 are defined as

For each SSB resource in the set $\overline{q}_1$ configured for PCell or PSCell in EN-DC or NE-DC or SA; or PCell in NR-DC

- $P_{CBD} = 1$.

For each SSB resource in the set $\overline{q}_1$ configured for PSCell in NR-DC

- $P_{CBD} = 2$ if UE is configured for candidate beam detection on SCell, 1 otherwise.

For each SSB resource in the set $\overline{q}_1$ configured for a SCell

- P_{CBD} = Z in EN-DC or NE-DC or SA.
- P_{CBD} = 2* Z in NR-DC.
  - Where Z is the number of band(s) on which UE is performing beam failure detection only for SCell
- P_{CBD} is the number of band(s) on which UE is performing candidate beam detection only for SCell.

Table 8.5.5.2-1: Evaluation period $T_{Evaluate_CBD_SSB}$ for FR1

Configuration	$T_{Evaluate_CBD_SSB}$ (ms)
non-DRX, DRX cycle ≤ 320ms	$Max(25, Ceil(3 \times P \times P_{CBD}) \times T_{SSB})$
DRX cycle > 320ms	$Ceil(3 \times P \times P_{CBD}) \times T_{DRX}$
Note: T_{SSB} is the periodicity of SSB in the set $\overline{q}_1$. T_{DRX} is the DRX cycle length.	

Table 8.5.5.2-2: Evaluation period $T_{Evaluate_CBD_SSB}$ for FR2

Configuration	$T_{Evaluate_CBD_SSB}$ (ms)
non-DRX, DRX cycle ≤ 320ms	$Max(25, Ceil(3 \times P \times N \times P_{CBD}) \times T_{SSB})$
DRX cycle > 320ms	$Ceil(3 \times P \times N \times P_{CBD}) \times T_{DRX}$
Note: T_{SSB} is the periodicity of SSB in the set $\overline{q}_1$. T_{DRX} is the DRX cycle length.	

8.5.5.3 Measurement restriction for SSB based candidate beam detection

For FR1, when the SSB for CBD measurement is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for CBD measurement without any restrictions;
- If SSB and CSI-RS have different SCS-es,
  - If UE supports *simultaneousRxDataSSB-DiffNumerology*, UE shall be able to measure the SSB for CBD measurement without any restriction;
  - If UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both SSB for CBD measurement and CSI-RS. Longer measurement period for SSB based CBD measurement is expected, and no requirements are defined.

For FR2, when the SSB for CBD measurement on one CC is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both SSB for CBD measurement and CSI-RS. Longer measurement period for SSB based CBD measurement is expected, and no requirements are defined.

For FR2, when the SSB for CBD measurement on one CC is in the same OFDM symbol as SSB from cell with additional PCI for BFD or L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both SSBs. Longer measurement period for SSB based CBD measurement is expected, and no requirements are defined.

For FR2, if network configures same or mixed numerology between SSB for CBD measurement on one FR2 band and CSI-RS for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement on the other FR2 band, UE shall be able to perform the related SSB based measurements in one band without any measurement restrictions in the other band, provided that UE is capable of independent beam management on this FR2 band pair.

8.5.6 Requirements for CSI-RS based candidate beam detection

8.5.6.1 Introduction

The requirements in this clause apply for each CSI-RS resource in the set $\overline{q}_1$ configured for a serving cell, provided that the CSI-RS resources configured for candidate beam detection are actually transmitted within UE active DL BWP during the entire evaluation period specified in clause 8.5.6.2. The requirements in this clause apply when UE is required to perform beam failure detection on no more than 1 serving cell per band.

8.5.6.2 Minimum requirement

Upon request the UE shall be able to evaluate whether the L1-RSRP measured on the configured CSI-RS resource in set $\overline{q}_1$ estimated over the last $T_{Evaluate_CBD_CSI\text{-}RS}$ [ms] period becomes better than the threshold Q_{in_LR} within $T_{Evaluate_CBD_CSI\text{-}RS}$ [ms] period provided CSI-RS Ês/Iot is according to Annex Table B.2.4.2 for a corresponding band.

The UE shall monitor the configured CSI-RS resources using the evaluation period in table 8.5.6.2-1 and 8.5.6.2-2 corresponding to the non-DRX mode, if the configured DRX cycle ≤ 320ms.

The value of $T_{Evaluate_CBD_CSI\text{-}RS}$ is defined in Table 8.5.6.2-1 for FR1.

The value of $T_{Evaluate_CBD_CSI\text{-}RS}$ is defined in Table 8.5.6.2-2 for FR2 with scaling factor N=8 for FR2-1 and N=12 for FR2-2.

When concurrent gaps are configured,

- P value for a CBD-RS resource to be measured is defined as
  - N_{total} / $N_{outside_MG}$ in FR1
  - $P_{sharing\ factor}$ * N_{total} / $N_{outside_MG}$ in FR2 with $N_{available}$ = 0

- N_{total} / $N_{available}$ in FR2 with Navailable > 0

- For a window W of duration max($T_{L1,}$ MGRP_max), where MGRP max is the maximum MGRP across all configured per-UE measurement gaps and per-FR measurement gaps within the same FR as serving cell, and starting at the beginning of any CBD-RS resource occasion:

  - N_{total} is the total number of CBD-RS resource occasions within the window, including those overlapped with measurement gap occasions or SMTC occasions within the window, and

  - $N_{outside_MG}$ is the number of CBD-RS resource occasions that are not overlapped with any measurement gap occasion within the window W

  - $N_{available}$ is the number of CBD-RS resource occasions that are not overlapped with any measurement gap occasion nor any SMTC occasion within the window W

  - T_{L1} is periodicity of the target CBD-RS.

Otherwise, for a UE not supporting *concurrentMeasGap-r17* or when concurrent gaps are not configured,

For FR1,

- $P = \frac{1}{1-\frac{T_{CSI-RS}}{xRP}}$, when in the monitored cell there are GAPs configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the CSI-RS; and

- P = 1 when in the monitored cell there are no GAPs overlapping with any occasion of the CSI-RS.

For FR2,

- P = 1, when candidate beam detection RS is not overlapped with GAP and also not overlapped with SMTC occasion.

- $P = \frac{1}{1-\frac{T_{CSI-RS}}{xRP}}$ when candidate beam detection RS is partially overlapped with GAP and candidate beam detection RS is not overlapped with SMTC occasion (T_{CSI-RS} < xRP)

- $P = \frac{1}{1-\frac{T_{CSI-RS}}{T_{SMTCperiod}}}$, when candidate beam detection RS is not overlapped with GAP and candidate beam detection RS is partially overlapped with SMTC occasion (T_{CSI-RS} < $T_{SMTCperiod}$).

- P =$P_{sharing\ factor}$, when candidate beam detection RS is not overlapped with GAP and candidate beam detection RS is fully overlapped with SMTC occasion (T_{CSI-RS} = $T_{SMTCperiod}$).

- $P = \frac{1}{1-\frac{T_{CSI-RS}}{xRP}-\frac{T_{CSI-RS}}{T_{SMTCperiod}}}$,, when candidate beam detection RS is partially overlapped with GAP and candidate beam detection RS is partially overlapped with SMTC occasion (T_{CSI-RS} < $T_{SMTCperiod}$) and SMTC occasion is not overlapped with GAP and

  - $T_{SMTCperiod} \neq$ xRP or

  - $T_{SMTCperiod}$ = xRP and T_{CSI-RS} < 0.5 × $T_{SMTCperiod}$

- $P = \frac{P_{sharing\ factor}}{1-\frac{T_{CSI-RS}}{xRP}}$, when candidate beam detection RS is partially overlapped with GAP and candidate beam detection RS is partially overlapped with SMTC occasion (T_{CSI-RS} < $T_{SMTCperiod}$) and SMTC occasion is not overlapped with GAP and $T_{SMTCperiod}$ = xRP and T_{CSI-RS} = 0.5 × $T_{SMTCperiod}$

- $P = \frac{1}{1-\frac{T_{CSI-RS}}{T_{SMTCperiod}}}$, when candidate beam detection RS is partially overlapped with GAP and candidate beam detection RS is partially overlapped with SMTC occasion (T_{CSI-RS} < $T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with GAP

- $P = \frac{3}{1-\frac{T_{CSI-RS}}{xRP}}$,, when candidate beam detection RS is partially overlapped with GAP and candidate beam detection RS is fully overlapped with SMTC occasion (T_{CSI-RS} = $T_{SMTCperiod}$) and SMTC occasion is partially overlapped with GAP ($T_{SMTCperiod}$ < xRP)

where,

- $P_{sharing\ factor}$ = 1, if the CBD-RS resource outside gap is
  - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and,
  - not overlapped by the RSSI symbols indicated by *ss-RSSI-Measurement* and 1 data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured.
- $P_{sharing\ factor}$ = 3, otherwise.
- If the high layer in TS 38.331 [2] signaling of *smtc2* is present, $T_{SMTCperiod}$ follows *smtc2*; Otherwise $T_{SMTCperiod}$ follows *smtc1*. $T_{SMTCperiod}$ is the shortest SMTC period among all CCs in the same FR2 band, provided the SMTC offset of all CCs in FR2 have the same offset.
- If the UE is configured with Pre-MG, a CBD-RS resource or an SMTC occasion is only considered to be overlapped by the Pre-MG if the Pre-MG is activated.
  - When a measurement gap is configured and the measurement gap is not NCSG,
  - a CBD-RS resource or an SMTC occasion is considered to be overlapped with the GAP if it overlaps the measurement gap occasion, and
  - xRP = MGRP
- Otherwise, when NCSG measurement gap is configured,
  - a CBD-RS resource or an SMTC occasion is considered to be overlapped with the GAP if
    - it overlaps the VIL1 or VIL2 of NCSG, or
    - it overlaps the ML of NCSG in FR2, and there exists a target carrier to be measured within NCSG that is intra-frequency carrier or inter-frequency carrier in the same band as the serving cell, or inter-frequency carrier in different band as the serving cell and UE does not support IBM between the target carrier and the serving cell,
  - and
    - xRP = VIRP
- When concurrent gaps are configured, a CBD-RS or an SMTC occasion is not considered to be overlapped by a gap occasion if the gap occasion is dropped according to 9.1.8.

Note: The overlap between CSI-RS for CBD and SMTC means that CSI-RS for CBD is within the SMTC window duration.

Longer evaluation period would be expected if the combination of the CBD-RS resource, SMTC occasion and [measurement gap] configurations does not meet pervious conditions.

Longer evaluation period would be expected if the CSI-RS is on the same OFDM symbols with RLM, BFD, BM-RS, or other CBD-RS, according to the measurement restrictions defined in clause 8.5.6.3.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer CBD evaluation period would be expected during the period $T_{identify_CGI,E\text{-}UTRAN}$ when the UE is requested to decode an LTE CGI.

The values of M_{CBD} used in Table 8.5.6.2-1 and Table 8.5.6.2-2 are defined as

- M_{CBD} = 3, if the CSI-RS resource configured in the set $\bar{q}_1$ is transmitted with Density = 3 and over the bandwidth $\geqslant$ 24 PRBs.

The values of P_{CBD} used in Table 8.5.6.2-1 and Table 8.5.6.2-2 are defined as

- For each CSI-RS resource in the set $\bar{q}_1$ configured for PCell or PSCell in EN-DC or NE-DC or SA; or PCell in NR-DC
  - P_{CBD} = 1.
- For each CSI-RS resource in the set $\bar{q}_1$ configured for PSCell in NR-DC
  - P_{CBD} = 2 if UE configured for candidate beam detection on SCell, 1 otherwise.
- For each CSI-RS resource in the set $\bar{q}_1$ configured for a SCell
  - P_{CBD} = Z in EN-DC or NE-DC or SA.
  - P_{CBD} = 2* Z in NR-DC.
    - Where Z is the number of band(s) on which UE is performing beam failure detection only for SCell
  - P_{CBD} is the number of band(s) on which UE is performing candidate beam detection only for SCell.

Table 8.5.6.2-1: Evaluation period $T_{Evaluate_CBD_CSI\text{-}RS}$ for FR1

Configuration	$T_{EvaluateC_CBD_CSI\text{-}RS}$ (ms)
non-DRX, DRX cycle ≤ 320ms	Max(25, Ceil($M_{CBD} \times P \times P_{CBD}$) × $T_{CSI\text{-}RS}$)
DRX cycle > 320ms	Ceil($M_{CBD} \times P \times P_{CBD}$) × T_{DRX}
Note: $T_{CSI\text{-}RS}$ is the periodicity of CSI-RS resource in the set $\bar{q}_1$. T_{DRX} is the DRX cycle length.	

Table 8.5.6.2-2: Evaluation period $T_{Evaluate_CBD_CSI\text{-}RS}$ for FR2

Configuration	$T_{Evaluate_CBD_CSI\text{-}RS}$ (ms)
non-DRX, DRX cycle ≤ 320ms	Max(25, Ceil($M_{CBD} \times P \times N \times P_{CBD}$) × $T_{CSI\text{-}RS}$)
DRX cycle > 320ms	Ceil($M_{CBD} \times P \times N \times P_{CBD}$) × T_{DRX}
Note: $T_{CSI\text{-}RS}$ is the periodicity of CSI-RS resource in the set $\bar{q}_1$. T_{DRX} is the DRX cycle length.	

8.5.6.3 Measurement restriction for CSI-RS based candidate beam detection

The SSB mentioned in this clause can be associated with either the serving cell PCI or a PCI different from serving cell PCI.

For both FR1 and FR2, when the CSI-RS for CBD measurement is in the same OFDM symbol as SSB for RLM, BFD, CBD or L1-RSRP measurement, UE is not required to receive CSI-RS for CBD measurement in the PRBs that overlap with an SSB.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has same SCS than CSI-RS for CBD measurement, the UE shall be able to perform CSI-RS based CBD measurement without restrictions.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has different SCS than CSI-RS for CBD measurement, the UE shall be able to perform CSI-RS based CBD measurement with restrictions according to its capabilities:

- If the UE supports *simultaneousRxDataSSB-DiffNumerology* the UE shall be able to perform CSI-RS based CBD measurement for without restrictions.

- If the UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both CSI-RS for CBD measurement and SSB. Longer measurement period for CSI-RS based CBD measurement is expected, and no requirements are defined.

For FR1, when the CSI-RS for CBD measurement is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement, UE shall be able to measure the CSI-RS for CBD measurement without any restriction.

For FR2, when the CSI-RS for CBD measurement on one CC is in the same OFDM symbol as SSB for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both CSI-RS for CBD measurement and SSB. Longer evaluation period for CSI-RS based CBD measurement is expected, and no requirements are defined.

For FR2, when the CSI-RS for CBD measurement on one CC is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both CSI-RS for CBD measurement and the other CSI-RS. Longer evaluation period for CSI-RS based CBD measurement is expected, and no requirements are defined.

8.5.7 Scheduling availability of UE during beam failure detection

Scheduling availability restrictions when the UE is performing beam failure detection are described in the following clauses.

8.5.7.1 Scheduling availability of UE performing beam failure detection with a same subcarrier spacing as PDSCH/PDCCH on FR1

There are no scheduling restrictions due to beam failure detection performed on SSB and CSI-RS configured for BFD with the same SCS as PDSCH or PDCCH in FR1.

8.5.7.2 Scheduling availability of UE performing beam failure detection with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UEs which support *simultaneousRxDataSSB-DiffNumerology* [14] there are no restrictions on scheduling availability due to beam failure detection when SSB is configured as BFD. For UEs which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to beam failure detection when SSB is configured as BFD.

- The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH or CSI-RS for tracking or CSI-RS for CQI on SSB symbols to be measured for beam failure detection.

When intra-band carrier aggregation in FR1 is configured, the scheduling restrictions on FR1 serving PCell or PSCell apply to all serving cells in the same band on the symbols that fully or partially overlap with restricted symbols. When inter-band carrier aggregation within FR1 is configured, there are no scheduling restrictions on FR1 serving cell(s) configured in other bands than the bands in which PCell or PSCell is configured.

8.5.7.3 Scheduling availability of UE performing beam failure detection on FR2

The following scheduling restriction applies due to beam failure detection.

- For the case where no RSs are provided for BFD, or when CSI-RS is configured for BFD is explicitly configured and is type-D QCLed with active TCI state for PDCCH or PDSCH, and the CSI-RS is not in a CSI-RS resource set with repetition ON
  - There are no scheduling restrictions due to beam failure detection performed based on the CSI-RS.
- Otherwise
  - For FR2-1 or the BFD-RS is not using 480 kHz SCS or 960 kHz SCS on FR2-2, the UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH or CSI-RS for tracking or CSI-RS for CQI on BFD-RS resource symbols to be measured for beam failure detection.

- For FR2-2 and the BFD-RS is using 480 kHz SCS or 960 kHz SCS, the UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH or CSI-RS for tracking or CSI-RS for CQI on BFD-RS resource symbols to be measured for beam failure detection, and on one data symbol before each BFD-RS symbol to be measured and one data symbol after each BFD-RS symbol to be measured.

When intra-band carrier aggregation in FR2 is performed, the scheduling restrictions on FR2 serving PCell or PSCell apply to all serving cells in the same band on the symbols that fully or partially overlap with restricted symbols.

When inter-band carrier aggregation in FR2 is performed, there are no scheduling restrictions on FR2 serving cells in the bands due to beam failure detection performed on FR2 serving cell(s) in different band(s), provided that UE is capable of independent beam management on this FR2 band pair. Additionally, there is no scheduling restriction if the UE is configured with different numerology between SSB on one FR2 band and data on the other FR2 band provided the UE is configured for IBM operation for the band pair.

For FR2, if following conditions are met,

- UE has been notified about system information update through paging,
- The gap between UE's reception of PDCCH that UE monitors in the Type2-PDCCH CSS set and that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots,

For the SSB and CORESET for RMSI scheduling multiplexing patterns 3, UE is expected to receive the PDCCH that UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured for BFD mesurement; and

For the SSB and CORESET for RMSI scheduling multiplexing patterns 2, UE is expected to receive PDSCH that corresponds to the PDCCH that UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured for BFD mesurement.

8.5.7.4 Scheduling availability of UE performing beam failure detection on FR1 or FR2 in case of FR1-FR2 inter-band CA and NR DC

There are no scheduling restrictions on FR1 serving cell(s) due to beam failure detection performed on FR2 serving PCell and/or PSCell.

There are no scheduling restrictions on FR2 serving cell(s) due to beam failure detection performed on FR1 serving PCell and/or PSCell.

8.5.8 Scheduling availability of UE during candidate beam detection

Scheduling availability restrictions when the UE is performing L1-RSRP measurement for candidate beam detection are described in the following clauses.

8.5.8.1 Scheduling availability of UE performing L1-RSRP measurement with a same subcarrier spacing as PDSCH/PDCCH on FR1

There are no scheduling restrictions due to L1-RSRP measurement performed on SSB and CSI-RS configured as link recovery detection resource with the same SCS as PDSCH or PDCCH in FR1.

8.5.8.2 Scheduling availability of UE performing L1-RSRP measurement with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UEs which support *simultaneousRxDataSSB-DiffNumerology* [14] there are no restrictions on scheduling availability due to L1-RSRP measurement based on SSB as link recovery detection resource. For UEs which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to L1-RSRP measurement based on SSB configured as link recovery detection resource.

- The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH, TRS, CSI-RS for tracking or CSI-RS for CQI on SSB symbols to be measured for L1-RSRP.

When intra-band carrier aggregation in FR1 is configured, the scheduling restrictions on one serving cell apply to all other serving cells in the same band on the symbols that fully or partially overlap with the restricted symbols. When inter-band carrier aggregation within FR1 is configured, there are no scheduling restrictions on FR1 serving cell(s) configured in other bands.

8.5.8.3 Scheduling availability of UE performing L1-RSRP measurement on FR2

The following scheduling restriction applies due to candidate beam detection

- For FR2-1 or the reference symbols to be measured for candidate beam detection is not using 480 kHz SCS or 960 kHz SCS on FR2-2, the UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH, CSI-RS for tracking or CSI-RS for CQI on reference symbols to be measured for candidate beam detection.

- For FR2-2 and the reference symbols to be measured for candidate beam detection is using 480 kHz SCS or 960 kHz SCS, the UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH, CSI-RS for tracking or CSI-RS for CQI on reference symbols to be measured for candidate beam detection, and on one data symbol before each reference symbol to be measured for candidate beam detection and one data symbol after each reference symbol to be measured for candidate beam detection.

When intra-band carrier aggregation in FR2 is configured, the scheduling restrictions on to one serving cell apply to all serving cells in the same band on the symbols that fully or partially overlap with restricted symbols.

When inter-band carrier aggregation in FR2 is performed, there are no scheduling restrictions on FR2 serving cells in the bands due to candidate beam detection performed on FR2 serving cell(s) in different band(s), provided that the FR2 serving cell(s) and the FR2 serving cell(s) for candidate beam detection are in a FR2 band pair and UE is capable of independent beam management on this FR2 band pair. Additionally, there is no scheduling restriction if the UE is configured with different numerology between SSB on one FR2 band and data on the other FR2 band provided the UE is configured for IBM operation for the band pair.

For FR2, if following conditions are met,

- UE has been notified about system information update through paging,

- The gap between UE’s reception of PDCCH that UE monitors in the Type2-PDCCH CSS set and that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots,

For the SSB and CORESET for RMSI scheduling multiplexing patterns 3, UE is expected to receive the PDCCH that UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured for CBD mesurement; and

For the SSB and CORESET for RMSI scheduling multiplexing patterns 2, UE is expected to receive PDSCH that corresponds to the PDCCH that UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured for CBD mesurement.

8.5.8.4 Scheduling availability of UE performing L1-RSRP measurement on FR1 or FR2 in case of FR1-FR2 inter-band CA and NR-DC

There are no scheduling restrictions on FR1 serving cell(s) due to L1-RSRP measurement performed on FR2 serving cell(s).

There are no scheduling restrictions on FR2 serving cell(s) due to L1-RSRP measurement performed on FR1 serving cell(s).

8.5.9 Requirements for Beam Failure Recovery in SCell

8.5.9.1 Introduction

For the UE provided with a configuration of PUCCH transmission with a link recovery request (LRR) as described in clause 9.2.4 in TS 38.213 [3], if beam recovery procedure is triggered for any of SCells, the UE shall transmit SR for UL resouce, followed by MAC CE providing one index for at least one corresponding SCell with radio link quality is

worse than $Q_{out,LR}$, and the index q_{new} for a periodic CSI-RS configuration or for a SSB provided by higher layer, as described in clause 5.17 of TS38.321 [7], if any, for a corresponding SCell.

For the UE not provided with a configuration of PUCCH transmission with a link recovery request (LRR) as described in clause 9.2.4 in TS 38.213 [3], if beam recovery procedure is triggered for any of SCells, the UE shall transmit preamble for UL-SCH resource application, followed by MAC CE providing one index for at least one corresponding SCell with radio link quality is worse than $Q_{out,LR}$, and the index q_{new} for a periodic CSI-RS configuration or for a SSB provided by higher layer, as described in clause 5.17 of TS38.321 [7], if any, for a corresponding SCell.

8.5.9.2 Requirement

Provided that UE is configured by *schedulingRequestIDForBFR* a configuration for LRR in a PUCCH transmission, after BFR is triggered on any of SCells as described in clause 5.17 of TS38.321 [7], UE shall be capable of transmit PUCCH with a LRR within a period of T, where

- $T = T_1 \times Ceil((T_2+D)/T_1)$ in which T_1, T_2 and D are defined as
  - T_1 is equal to the periodicity of PUCCH configured with *schedulingRequestIDForBFR*.
  - $T_2 = T_{Evaluate_CBD}$ is the evaluation period specified in clause 8.5.5 or 8.5.6 for SSB or CSI-RS based candidate beam detection, that is $T_{Evaluate_CBD_SSB}$ or $T_{Evaluate_CBD_CSI-RS}$, depending on the applicable reference signal configured for candidate beam detection.
  - D = 2ms is the UE Processing time.

8.5.10 Minimum requirement at transitions for beam failure detection

When the UE transitions between DRX and no DRX or when DRX cycle periodicity changes, for each BFD-RS resource, for a duration of time equal to the evaluation period corresponding to the second mode after the transition occurs, the UE shall use an evaluation period that is no less than the minimum of evaluation period corresponding to the first mode and the second mode. Subsequent to this duration, the UE shall use an evaluation period corresponding to the second mode for each BFD-RS resource.

When the UE transitions from a first configuration of BFD resources to a second configuration of BFD resources that is different from the first configuration, for each BFD resource present in the second configuration, for a duration of time equal to the evaluation period corresponding to the second configuration after the transition occurs, the UE shall use an evaluation period that is no less than the minimum of evaluation periods corresponding to the first configuration and the second configuration. Subsequent to this duration, the UE shall use an evaluation period corresponding to the second configuration for each BFD resource present in the second configuration.

When the UE transitions from a first configuration of active TCI state of the CORESET to a second configuration of active TCI state of the CORESET, for each CSI-RS for BFD present in the second configuration, the UE shall use an evaluation period corresponding to the second configuration from the time of transition.

8.5A Link Recovery Procedures when CCA is used on target frequency

8.5A.1 Introduction

The requirements for link recovery procedure in the clause apply when CCA is used on a serving frequency on the downlink.

The UE shall assess the downlink radio link quality of a serving cell based on the reference signal in the set $\bar{q}_0$ as specified in TS 38.213 [3] in order to detect beam failure on:

- PCell in SA operation mode,
- PSCell in EN-DC operation mode.
- PSCell in NR-DC operation mode.

The RS resource configurations in the set $\bar{q}_0$ can be periodic SSBs. UE is not required to perform beam failure detection outside the active DL BWP. UE is not required to meet the requirements in clause 8.5A.2 and 8.5A.3 if UE does not have set $\bar{q}_0$.

On each RS resource configuration in the set $\bar{q}_0$, the UE shall estimate the radio link quality and compare it to the threshold $Q_{out_LR,CCA}$ for the purpose of accessing downlink radio link quality of the serving cell beams.

The threshold $Q_{out_LR,CCA}$ is defined as the level at which the downlink radio level link of a given resource configuration on set $\bar{q}_0$ cannot be reliably received and shall correspond to the $BLER_{out,CCA}$ = 10% block error rate of a hypothetical PDCCH transmission. For SSB based beam failure detection, $Q_{out_LR_SSB,CCA}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 8.5A.2.1-1.

Upon request the UE shall deliver configuration indexes from the set $\bar{q}_1$ as specified in TS 38.213 [3] , to higher layers, and the corresponding L1-RSRP measurement provided that the measured L1-RSRP is equal to or better than the threshold $Q_{in_LR,CCA}$, which is indicated by higher layer parameter *rsrp-ThresholdSSB*. The UE applies the $Q_{in_LR,CCA}$ threshold to the L1-RSRP measurement obtained from an SSB. The RS resource configurations in the set $\bar{q}_1$ can be periodic SSBs. UE is not required to perform candidate beam detection outside the active DL BWP.

In the requirements of clause 8.5A, the term CBD-RS SSB occasions not available at the UE refers to when the CBD-RS SSB is configured by gNB in a cell on a carrier frequency subject to CCA, but the first two successive candidate SSB positions for the same SSB index within the set of configured CBD-RS resources are not available at the UE due to DL CCA failures at gNB during the corresponding evaluation period; otherwise the CBD-RS SSB is considered as available at the UE.

The requirements in clause 8.5A apply for any *channelAccessMode* configuration [TS 38.331, 2].

8.5A.2 Requirements for SSB based beam failure detection

8.5A.2.1 Introduction

The requirements in this clause apply for each SSB resource in the set $\bar{q}_0$ configured for a serving cell, provided that the SSB configured for beam failure detection is actually transmitted within the UE active DL BWP during the entire evaluation period specified in clause 8.5A.2.2, but occasionally may not be transmitted due to CCA operation.

Table 8.5A.2.1-1: PDCCH transmission parameters for beam failure instance

Attribute	Value for BLER
DCI format	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	8
Ratio of hypothetical PDCCH RE energy to average SSS RE energy	0dB
Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	0dB
Bandwidth (PRBs)	24
Sub-carrier spacing (kHz)	Same as the SCS of RMSI CORESET
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed

8.5A.2.2 Minimum requirement

UE shall be able to evaluate whether the downlink radio link quality on the configured BFD-RS SSB resource in set $\bar{q}_0$ estimated over the last $T_{Evaluate_BFD_SSB_CCA}$ ms period becomes worse than the threshold $Q_{out_LR_SSB,CCA}$ within $T_{Evaluate_BFD_SSB_CCA}$ ms period.

The value of $T_{Evaluate_BFD_SSB_CCA}$ is defined in Table 8.5A.2.2-1 for FR1.

The value of $T_{Evaluate_BFD_SSB_CCA}$ is defined in Table 8.5A.2.2-2 for FR2-2 with scaling factor N=12.

When concurrent gaps are configured,

- P value for a BFD-RS resource to be measured is defined as N_{total} / $N_{outside_MG}$
- For a window W of duration max(T_{L1}, MGRP_max), where MGRP max is the maximum MGRP across all configured per-UE measurement gap and per-FR measurement gap within the same FR as serving cell, and starting at the beginning of any BFD-RS resource occasion:
  - N_{total} is the total number of BFD-RS resource occasions within the window, including those overlapped with measurement gap occasions within the window, and
  - $N_{outside_MG}$ is the number of BFD-RS resource occasions that are not overlapped with any measurement gap occasion within the window W
- Otherwise, for a UE not supporting *concurrentMeasGap-r17* or when concurrent gaps are not configured,
  - $P = \frac{1}{1-\frac{T_{SSB}}{xGP}}$, when in the monitored cell there are GAPs configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the BFD-RS SSB.
  - P=1 when in the monitored cell there are no GAPs overlapping with any occasion of the BFD-RS SSB.
- When a measurement gap is configured and the measurement gap is not NCSG,
  - a BFD-RS resource is considered to be overlapped with the GAP if it overlaps a measurement gap occasion, and
  - xRP = MGRP
- Otherwise, when NCSG measurement gap is configured,
  - a BFD-RS resource is considered to be overlapped with the GAP if it overlaps the VIL1 or VIL2 of NCSG, and
  - xRP = VIRP
- When concurrent gaps are configured, a BFD-RS is not considered to be overlapped by a gap occasion if the gap occasion is dropped according to 9.1.8.

For FR2-2,

- $P = \frac{1}{1-\frac{T_{SSB}}{T_{SMTCperiod}}}$, when BFD-RS resource is not overlapped with measurement gap and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$).
- $P = P_{sharing\ factor}$, when the BFD-RS resource is not overlapped with measurement gap and the BFD-RS resource is fully overlapped with SMTC period ($T_{SSB} = T_{SMTCperiod}$).
- $P = \frac{1}{1-\frac{T_{SSB}}{MGRP}-\frac{T_{SSB}}{T_{SMTCperiod}}}$, when the BFD-RS resource is partially overlapped with measurement gap and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and
  - $T_{SMTCperiod} \neq$ MGRP or
  - $T_{SMTCperiod}$ = MGRP and $T_{SSB} < 0.5*T_{SMTCperiod}$
- $P = \frac{P_{sharing\ factor}}{1-\frac{T_{SSB}}{MGRP}}$, when the BFD-RS resource is partially overlapped with measurement gap and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and $T_{SMTCperiod}$ = MGRP and $T_{SSB} = 0.5*T_{SMTCperiod}$

- $P = \frac{1}{1-\frac{T_{SSB}}{T_{SMTCperiod}}}$, when the BFD-RS resource is partially overlapped with measurement gap (T_{SSB} <MGRP) and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with measurement gap.

- $P = \frac{P_{sharing\ factor}}{1-\frac{T_{SSB}}{MGRP}}$, when the BFD-RS resource is partially overlapped with measurement gap and the BFD-RS resource is fully overlapped with SMTC occasion ($T_{SSB} = T_{SMTCperiod}$) and SMTC occasion is partially overlapped with measurement gap ($T_{SMTCperiod} < MGRP$)

- $P_{sharing\ factor} = 1$, if the BFD-RS resource outside measurement gap is

  - not overlapped with the SSB symbols indicated by SSB-ToMeasure and K data symbol before each consecutive SSB symbols indicated by SSB-ToMeasure and K data symbol after each consecutive SSB symbols indicated by SSB-ToMeasure, given that SSB-ToMeasure is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and K is defined in clause 9.2.5.3.3, and;

  - not overlapped with the RSSI symbols indicated by ss-RSSI-Measurement and K data symbol before each RSSI symbol indicated by ss-RSSI-Measurement and K data symbol after each RSSI symbol indicated by ss-RSSI-Measurement, given that ss-RSSI-Measurement is configured, and K is defined in clause 9.2.5.3.3.

- Psharing factor = 3, otherwise.

where,

If the high layer in TS 38.331 [2] signaling of *smtc2* is configured, $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc2*; Otherwise $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc1*. $T_{SMTCperiod}$ is the shortest SMTC period among all CCs in the same FR2-2 band, given the SMTC offset of all CCs in FR2-2 provided the same offset.

If the high layer in TS 38.331 [2] signaling of *smtc2* is configured, $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc2*; Otherwise $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc1*.

If the UE is configured with Pre-MG, a BFD-RS resource is only considered to be overlapped by the Pre-MG if the Pre-MG is activated.

Longer evaluation period would be expected if the combination of BFD-RS SSB resource, SMTC occasion and GAP configurations does not meet pervious conditions.

Table 8.5A.2.2-1: Evaluation period $T_{Evaluate_BFD_SSB_CCA}$ for FR1

Configuration	$T_{Evaluate_BFD_SSB_CCA}$ (ms)	
	BFD-RS SSB Es/Iot Note2 ≥ -7 dB	BFD-RS SSB Es/Iot Note2 < -7 dB
no DRX	Max(50, Ceil((10 × P) × T_{SSB}))	Max(50, Ceil((12 × P) × T_{SSB}))
DRX cycle ≤ 320ms	Max(50, Ceil(1.5 × 8 × P) × Max(T_{DRX},T_{SSB}))	Max(50, Ceil(1.5 × 10 × P) × Max(T_{DRX},T_{SSB}))
DRX cycle > 320ms	Ceil(7 × P) × T_{DRX}	Ceil(8 × P) × T_{DRX}
Note 1: T_{SSB} is the periodicity of SSB in the set $\bar{q}_0$. T_{DRX} is the DRX cycle length. Note 2: BFD-RS SSB Es/Iot is the averaged BFD-RS SSB Es/Iot over the most recent previous evaluation period.		

Table 8.5A.2.2-2: Evaluation period $T_{Evaluate_BFD_SSB_CCA}$ for FR2-2

Configuration	$T_{Evaluate_BFD_SSB_CCA}$ (ms)
no DRX	Max(200, Ceil([12]*P* N)*T_{SSB})
DRX cycle ≤ 320ms	Max(200, Ceil(1.5*[10]*P* N)*Max(T_{DRX},T_{SSB}))
DRX cycle > 320ms	Ceil([10]*P* N)*T_{DRX}
Note 1: T_{SSB} is the periodicity of SSB in the set $\bar{q}_0$. T_{DRX} is the DRX cycle length.	

8.5A.2.3 Measurement restriction for SSB based beam failure detection

The UE is required to be capable of measuring SSB for BFD without measurement gaps. The UE is required to perform the SSB measurements with measurement restrictions as described in the following clauses.

For FR1, when the SSB for BFD measurement is in the same OFDM symbol as CSI-RS for BFD, CBD or L1-RSRP measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for BFD measurement without any restriction;
- If SSB and CSI-RS have different SCS,
  - If UE supports *simultaneousRxDataSSB-DiffNumerology*, UE shall be able to measure the SSB for BFD measurement without any restriction;
  - If UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure SSB for BFD measurement.

For FR2-2, when the SSB for BFD measurement on one CC is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both SSB for BFD measurement and CSI-RS. Longer measurement period for SSB based BFD measurement is expected, and no requirements are defined.

8.5A.3 Void

8.5A.4 Minimum requirement for L1 indication

When the radio link quality on all the RS resources in set $\bar{q}_0$ is worse than $Q_{out_LR,CCA}$, layer 1 of the UE shall send a beam failure instance indication to the higher layers.

The beam failure instance evaluation for the RS resources in set $\bar{q}_0$ shall be performed as specified in clause 6 in TS 38.213 [3]. Two successive indications from layer 1 shall be separated by at least $T_{Indication_interval_BFD_CCA}$.

When DRX is not used, $T_{Indication_interval_BFD_CCA}$ is max(2ms, $T_{SSB\text{-}RS,M}$)), where $T_{SSB\text{-}RS,M}$ is the shortest periodicity of all RS resources in set $\bar{q}_0$ for the accessed cell, corresponding to either the shortest periodicity of the SSB in the set $\bar{q}_0$.

When DRX is used, for SSB based link quality measurement,

- $T_{Indication_interval_BFD_CCA}$ = Max(1.5 × DRX_cycle_length, 1.5 × $T_{SSB\text{-}RS,M}$), if DRX_cycle_length ≤ 320ms,
- $T_{Indication_interval_BFD_CCA}$ = DRX_cycle_length, if DRX_cycle_length > 320ms.

8.5A.5 Requirements for SSB based candidate beam detection

8.5A.5.1 Introduction

The requirements in this clause apply for each CBD-RS SSB resource in the set $\bar{q}_1$ configured for a serving cell, provided that the SSBs configured for candidate beam detection are actually transmitted within UE active DL BWP during the entire evaluation period specified in clause 8.5A.5.2, but occasionally may not be transmitted due to CCA operation.

8.5A.5.2 Minimum requirement

Upon request the UE shall be able to evaluate whether the L1-RSRP measured on the configured CBD-RS SSB resource in set $\bar{q}_1$ estimated over the last $T_{Evaluate_CBD_SSB_CCA}$ ms period becomes better than the threshold $Q_{in_LR,CCA}$ provided SSB_RP and SSB Ês/Iot are according to Annex Table B.2.4.1 for a corresponding band.

The UE shall monitor the configured SSB resources using the evaluation period in table 8.5A.5.2-1 corresponding to the non-DRX mode, if the configured DRX cycle ≤ 320ms.

The value of $T_{Evaluate_CBD_SSB_CCA}$ is defined in Table 8.5A.5.2-1 for FR1.

The value of $T_{Evaluate_CBD_SSB_CCA}$ is defined in Table 8.5A.5.2-2 for FR2-2 with scaling factor N=TBD.

For FR1,

- For a UE supporting *concurrentMeasGap-r17* and when concurrent gaps are configured,
  - P value for a CBD-RS resource to be measured is defined as N_{total} / $N_{outside_MG}$
  - For a window W of duration max(T_{L1}, MGRP_max), where MGRP max is the maximum MGRP across all configured per-UE measurement gaps and per-FR measurement gaps within the same FR as serving cell, and starting at the beginning of any CBD-RS resource occasion:
    - N_{total} is the total number of CBD-RS resource occasions within the window, including those overlapped with measurement gap occasions within the window, and
    - $N_{outside_MG}$ is the number of CBD-RS resource occasions that are not overlapped with any measurement gap occasion within the window W
- Otherwise, for a UE not supporting *concurrentMeasGap-r17* or when concurrent gaps are not configured,
  - $P = \frac{1}{1-\frac{T_{SSB}}{MRGP}}$, when in the monitored cell there are GAPs configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the CBD-RS SSB,
  - P = 1 when in the monitored cell there are no GAPs overlapping with any occasion of the CBD-RS SSB.

For FR2-2,

- $P = \frac{1}{1-\frac{T_{SSB}}{T_{SMTCperiod}}}$, when candidate beam detection RS is not overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$).
- P is $P_{sharing\ factor}$, when candidate beam detection RS is not overlapped with measurement gap and candidate beam detection RS is fully overlapped with SMTC period ($T_{SSB} = T_{SMTCperiod}$).
- $P = \frac{1}{1-\frac{T_{SSB}}{MGRP}-\frac{T_{SSB}}{T_{SMTCperiod}}}$, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and
  - $T_{SMTCperiod} \neq$ MGRP or
  - $T_{SMTCperiod}$ = MGRP and $T_{SSB} < 0.5 \times T_{SMTCperiod}$
- $P = \frac{P_{sharing\ factor}}{1-\frac{T_{SSB}}{MGRP}}$, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and $T_{SMTCperiod}$ = MGRP and $T_{SSB} = 0.5 \times T_{SMTCperiod}$
- $P = \frac{1}{1-\frac{T_{SSB}}{T_{SMTCperiod}}}$, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with measurement gap
- $P = \frac{P_{sharing\ factor}}{1-\frac{T_{SSB}}{MGRP}}$, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is fully overlapped with SMTC occasion ($T_{SSB} = T_{SMTCperiod}$) and SMTC occasion is partially overlapped with measurement gap ($T_{SMTCperiod} <$ MGRP)
- $P_{sharing\ factor}$ = 1, if the candidate beam detection RS outside measurement gap is
  - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and TBD data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and TBD data symbol after each consecutive SSB

symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and;

- not overlapped with the RSSI symbols indicated by *ss-RSSI-Measurement* and TBD data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and TBD data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured

- $P_{sharing\ factor} = 3$, otherwise.

where,

- If the high layer in TS 38.331 [2] signaling of *smtc2* is present, $T_{SMTCperiod}$ follows *smtc2*; Otherwise $T_{SMTCperiod}$ follows *smtc1*. $T_{SMTCperiod}$ is the shortest SMTC period among all CCs in the same FR2-2 band, provided the SMTC offset of all CCs in FR2-2 have the same offset.

- If the UE is configured with Pre-MG, a CBD-RS resource is only considered to be overlapped by the Pre-MG if the Pre-MG is activated.

- When a measurement gap is configured and the measurement gap is not NCSG,

  - a CBD-RS resource is considered to be overlapped with the GAP if it overlaps a measurement gap occasion, and

  - xRP = MGRP

- Otherwise, when NCSG measurement gap is configured,

  - a CBD-RS resource is considered to be overlapped with the GAP if it overlaps the VIL1 or VIL2 of NCSG, and

  - xRP = VIRP

- When concurrent gaps are configured, a CBD-RS is not considered to be overlapped by a gap occasion if the gap occasion is dropped according to9.1.8.

Table 8.5A.5.2-1: Evaluation period $T_{Evaluate_CBD_SSB_CCA}$ for FR1

Configuration	$T_{Evaluate_CBD_SSB_CCA}$ (ms)
non-DRX, DRX cycle ≤ 320ms	$Max(25, Ceil((3 + L_{CBD}) \times P) \times T_{SSB})$
DRX cycle > 320ms	$Ceil((3 + L_{CBD}) \times P) \times T_{DRX}$
Note 1: T_{SSB} is the periodicity of SSB in the set $\bar{q}_1$. T_{DRX} is the DRX cycle length. Note 2: When DRX is not configured, L_{CBD} is the number of CBD-RS SSB occasions not available at the UE during $T_{Evaluate_CBD_SSB_CCA}$ where $L_{CBD} \le L_{CBD,max}$. When DRX is configured, L_{CBD} is the number of DRX cycles in which at least one of the CBD-RS SSB occasions not available at the UE during $T_{Evaluate_CBD_SSB_CCA}$ where $L_{CBD} \le L_{CBD,max}$. The UE, which is configured with DRX, is not required to determine the availability of SSB occasions more frequent than Once per Max(25ms, P * T_{SSB}) if DRX cycle ≤ 320ms, Once per P * T_{DRX} if DRX cycle > 320ms. Note 3: $L_{CBD,max}$=7 for Max(T_{DRX}, T_{SSB}) ≤ 40 assuming T_{DRX}=0 for non-DRX, $L_{CBD,max}$=5 for 40 < Max(T_{DRX}, T_{SSB}) ≤ 320, $L_{CBD,max}$=3 for T_{DRX} > 320. Note 4 If $L_{CBD} > L_{CBD,max}$, the UE shall assume no new candidate beams are found for this evaluation period.	

Table 8.5A.5.2-2: Evaluation period $T_{Evaluate_CBD_SSB_CCA}$ for FR2-2

Configuration	$T_{Evaluate_CBD_SSB_CCA}$ (ms)
non-DRX, DRX cycle ≤ 320ms	$Max(25, Ceil((3 + L_{CBD}) \times P \times N) \times T_{SSB})$

DRX cycle > 320ms	Ceil((3 + L_{CBD}) × P × N) × T_{DRX}
Note 1:	T_{SSB} is the periodicity of SSB in the set $\bar{q}_1$. T_{DRX} is the DRX cycle length.
Note 2:	When DRX is not configured, L_{in} is the number of CBD-RS SSB occasions group which are not available at the UE during $T_{Evaluate_CBD_SSB,CCA}$, where $L_{CBD} \leq L_{CBD,max}$. A CBD-RS SSB occasions group consists of N consecutive CBD-RS SSB occasions, and the CBD-RS SSB occasions group is not available at the UE when at least one CBD-SSB occasion in the group is not transmitted by the gNB. When DRX is configured, L_{in} is the number of DRX cycles groups which are not available at the UE during $T_{Evaluate_CBD_SSB,CCA}$, where $L_{in} \leq L_{CBD,max}$. A DRX group consists of N DRX cycles, and the DRX group is not available when there is at least one DRX in which at least one CBD-RS SSB occasion is not available. The UE is not required to determine the availability of SSB occasions more frequent than once per DRX cycle length, when configured with DRX.
Note 3:	$L_{CBD,max}$=7 for Max(T_{DRX}, T_{SSB}) ≤ 40 assuming T_{DRX}=0 for non-DRX, $L_{CBD,max}$=5 for 40 < Max(T_{DRX}, T_{SSB}) ≤ 320, $L_{CBD,max}$=3 for T_{DRX} > 320.
Note 4:	If L_{CBD}>$L_{CBD,max}$, the UE shall assume no new candidate beams are found for this evaluation period.

8.5A.5.3 Measurement restriction for SSB based candidate beam detection

For FR1, when the SSB for CBD measurement is in the same OFDM symbol as CSI-RS for BFD, CBD or L1-RSRP measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for CBD measurement without any restrictions;
- If SSB and CSI-RS have different SCS-es,
  - If UE supports *simultaneousRxDataSSB-DiffNumerology*, UE shall be able to measure the SSB for CBD measurement without any restriction;
  - If UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure SSB for CBD measurement.

For FR2-2, when the SSB for CBD measurement on one CC is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both SSB for CBD measurement and CSI-RS. Longer measurement period for SSB based CBD measurement is expected, and no requirements are defined.

8.5A.6 Void

8.5A.7 Scheduling availability of UE during beam failure detection

Scheduling availability restrictions when the UE is performing beam failure detection are described in the following clauses.

8.5A.7.1 Scheduling availability of UE performing beam failure detection with a same subcarrier spacing as PDSCH/PDCCH

In this clause, the same requirements apply as in Clause 8.5.7.1.

8.5A.7.2 Scheduling availability of UE performing beam failure detection with a different subcarrier spacing than PDSCH/PDCCH

In this clause, the same requirements apply as in Clause 8.5.7.2.

8.5A.7.3 Scheduling availability of UE performing beam failure detection on FR2-2

In this clause, the same requirements apply as in Clause 8.5.7.3.

8.5A.7.4 Scheduling availability of UE performing beam failure detection on FR1 or FR2-2 in case of FR1-FR2-2 inter-band CA and NR DC

In this clause, the same requirements apply as in Clause 8.5.7.4.

8.5A.8 Scheduling availability of UE during candidate beam detection

Scheduling availability restrictions when the UE is performing L1-RSRP measurement for candidate beam detection are described in the following clauses.

8.5A.8.1 Scheduling availability of UE performing L1-RSRP measurement with a same subcarrier spacing as PDSCH/PDCCH on FR1

In this clause, the same requirements apply as in Clause 8.5.8.1.

8.5A.8.2 Scheduling availability of UE performing L1-RSRP measurement with a different subcarrier spacing than PDSCH/PDCCH on FR1

In this clause, the same requirements apply as in Clause 8.5.8.2.

8.5A.8.3 Scheduling availability of UE performing L1-RSRP measurement on FR2-2

In this clause, the same requirements apply as in Clause 8.5.8.3.

8.5.8.4 Scheduling availability of UE performing L1-RSRP measurement on FR1 or FR2-2 in case of FR1-FR2-2 inter-band CA and NR-DC

In this clause, the same requirements apply as in Clause 8.5.8.4.

8.5B Link Recovery Procedures for Redcap

8.5B.1 Introduction

The Redcap UE shall assess the downlink radio link quality of a serving cell based on the reference signal in the set $\overline{q}_0$ as specified in TS 38.213 [3] in order to detect beam failure on PCell in SA. The SSB and SMTC in this section applies for both CD-SSB and NCD-SSB if it is not additional specified.

The RS resource configurations in the set $\overline{q}_0$ on PCell can be periodic CSI-RS resources and/or SSBs. UE is not required to perform beam failure detection outside the active DL BWP. UE is not required to meet the requirements in clause 8.5B.2 and 8.5B.3 if UE does not have set $\overline{q}_0$.

On each RS resource configuration in the set $\overline{q}_0$, the UE shall estimate the radio link quality and compare it to the threshold $Q_{out_LR_Redcap}$ for the purpose of accessing downlink radio link quality of the serving cell beams.

The threshold $Q_{out_LR_Redcap}$ is defined as the level at which the downlink radio level link of a given resource configuration on set $\overline{q}_0$ cannot be reliably received and shall correspond to the $BLER_{out}$ = 10% block error rate of a hypothetical PDCCH transmission. For SSB based beam failure detection, $Q_{out_LR_SSB}$ is derived based on the

hypothetical PDCCH transmission parameters listed in Table 8.5B.2.1-1. For CSI-RS based beam failure detection, $Q_{out_LR_CSI-RS}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 8.5B.3.1-1.

Upon request the UE shall deliver configuration indexes from the set $\overline{q}_1$ as specified in TS 38.213 [3] , to higher layers, and the corresponding L1-RSRP measurement provided that the measured L1-RSRP is equal to or better than the threshold $Q_{in_LR_RedCap}$, which is indicated by higher layer parameter *rsrp-ThresholdSSB*. The UE applies the $Q_{in_LR_RedCap}$ threshold to the L1-RSRP measurement obtained from an SSB. The UE applies the $Q_{in_LR_RedCap}$ threshold to the L1-RSRP measurement obtained for a CSI-RS resource after scaling a respective CSI-RS reception power with a value provided by higher layer parameter *powerControlOffsetSS*. The RS resource configurations in the set $\overline{q}_1$ can be periodic CSI-RS resources or SSBs or both SSB and CSI-RS resources. UE is not required to perform candidate beam detection outside the active DL BWP.

8.5B.2 Requirements for SSB based beam failure detection for Redcap

8.5B.2.1 Introduction

The requirements in this clause apply for each SSB resource in the set $\overline{q}_0$ configured for a serving cell, provided that the SSB configured for beam failure detection is actually transmitted within the UE active DL BWP during the entire evaluation period specified in clause 8.5B.2.2.

Table 8.5B.2.1-1: PDCCH transmission parameters for beam failure instance

Attribute	Value for BLER
DCI format	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	16 for 1 Rx UE; 8 for 2 Rx UE
Ratio of hypothetical PDCCH RE energy to average SSS RE energy	0dB
Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	0dB
Bandwidth (PRBs)	48 for 1 Rx UE; 24 for 2 Rx UE
Sub-carrier spacing (kHz)	Same as the SCS of RMSI CORESET
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed
Note 1： Note: SCS=60kHz is not applicable for FR1	

8.5B.2.2 Minimum requirement

UE shall be able to evaluate whether the downlink radio link quality on the configured SSB resource in set $\overline{q}_0$ estimated over the last $T_{Evaluate_BFD_SSB_Redcap}$ ms period becomes worse than the threshold $Q_{out_LR_SSB}$ within $T_{Evaluate_BFD_SSB_Redcap}$ ms period.

The value of $T_{Evaluate_BFD_SSB_Redcap}$ is defined in Table 8.5B.2.2-1 for FR1.

The value of $T_{Evaluate_BFD_SSB_Redcap}$ is defined in Table 8.5B.2.2-2 for FR2 with scaling factor N=8

For FR1,

- $P = \frac{1}{1-\frac{T_{SSB}}{MGRP}}$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the SSB.

- P=1 when in the monitored cell there are no measurement gaps overlapping with any occasion of the SSB.

For FR2,

- $P = \frac{1}{1-\frac{T_{SSB}}{T_{SMTCperiod}}}$, when BFD-RS resource is not overlapped with measurement gap and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$).

- $P = P_{sharing\ factor}$, when the BFD-RS resource is not overlapped with measurement gap and the BFD-RS resource is fully overlapped with SMTC period ($T_{SSB} = T_{SMTCperiod}$).

- $P = \frac{1}{1-\frac{T_{SSB}}{MGRP}-\frac{T_{SSB}}{T_{SMTCperiod}}}$, when the BFD-RS resource is partially overlapped with measurement gap and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and

  - $T_{SMTCperiod} \neq$ MGRP or

  - $T_{SMTCperiod}$ = MGRP and $T_{SSB} < 0.5*T_{SMTCperiod}$

- $P = \frac{P_{sharing\ factor}}{1-\frac{T_{SSB}}{MGRP}}$, when the BFD-RS resource is partially overlapped with measurement gap and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and $T_{SMTCperiod}$ = MGRP and $T_{SSB} = 0.5*T_{SMTCperiod}$

- $P = \frac{1}{1-\frac{T_{SSB}}{T_{SMTCperiod}}}$, when the BFD-RS resource is partially overlapped with measurement gap (T_{SSB} <MGRP) and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with measurement gap.

- $P = \frac{P_{sharing\ factor}}{1-\frac{T_{SSB}}{MGRP}}$, when the BFD-RS resource is partially overlapped with measurement gap and the BFD-RS resource is fully overlapped with SMTC occasion ($T_{SSB} = T_{SMTCperiod}$) and SMTC occasion is partially overlapped with measurement gap ($T_{SMTCperiod}$ < MGRP)

- $P_{sharing\ factor}$ = 1, if the BFD-RS resource outside measurement gap is

  - not overlapped with the SSB symbols indicated by SSB-ToMeasure and 1 data symbol before each consecutive SSB symbols indicated by SSB-ToMeasure and 1 data symbol after each consecutive SSB symbols indicated by SSB-ToMeasure, given that SSB-ToMeasure is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and;

  - not overlapped with the RSSI symbols indicated by ss-RSSI-Measurement and 1 data symbol before each RSSI symbol indicated by ss-RSSI-Measurement and 1 data symbol after each RSSI symbol indicated by ss-RSSI-Measurement, given that ss-RSSI-Measurement is configured.- Psharing factor = 3, otherwise.

where,

If the high layer in TS 38.331 [2] signaling of *smtc2* is configured, $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc2*; Otherwise $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc1*.

Longer evaluation period would be expected if the combination of BFD-RS resource, SMTC occasion and measurement gap configurations does not meet pervious conditions.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer BFD evaluation period would be expected during the period $T_{identify_CGI,E-UTRAN}$ when the UE is requested to decode an LTE CGI.

Table 8.5B.2.2-1: Evaluation period $T_{Evaluate_BFD_SSB_Redcap}$ for FR1

Configuration	$T_{Evaluate_BFD_SSB_Redcap}$ (ms) for Redcap UE with 2 Rx	$T_{Evaluate_BFD_SSB_Redcap}$ (ms) for 1 Rx Redcap

no DRX	Max(50, Ceil(5 × P) × T_{SSB})	[Max(50, Ceil(10 × P) × T_{SSB})]
DRX cycle ≤ 320ms	Max(50, Ceil(7.5 × P) × Max(T_{DRX},T_{SSB}))	[Max(50, Ceil(15 × P) × Max(T_{DRX},T_{SSB}))]
DRX cycle > 320ms	Ceil(5 × P) × T_{DRX}	[Ceil(10 × P) × T_{DRX}]
Note: T_{SSB} is the periodicity of SSB in the set $\overline{q}_0$. T_{DRX} is the DRX cycle length.		

Table 8.5B.2.2-2: Evaluation period $T_{Evaluate_BFD_SSB_Redcap}$ for FR2

Configuration	$T_{Evaluate_BFD_SSB_Redcap}$ (ms)
no DRX	Max(50, Ceil(5 × P × N) × T_{SSB})
DRX cycle ≤ 320ms	Max(50, Ceil(7.5 × P × N) × Max(T_{DRX},T_{SSB}))
DRX cycle > 320ms	Ceil(5 × P × N) × T_{DRX}
Note: T_{SSB} is the periodicity of SSB in the set $\overline{q}_0$. T_{DRX} is the DRX cycle length.	

8.5B.2.3 Measurement restriction for SSB based beam failure detection

The UE is required to be capable of measuring SSB for BFD without measurement gaps. The UE is required to perform the SSB measurements with measurement restrictions as described in the following scenarios.

For FR1, when the SSB for BFD measurement is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for BFD measurement without any restriction;
- If SSB and CSI-RS have different SCS,
  - If UE supports *simultaneousRxDataSSB-DiffNumerology*, UE shall be able to measure the SSB for BFD measurement without any restriction;
  - If UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both SSB for BFD measurement and CSI-RS. Longer measurement period for SSB based BFD measurement is expected, and no requirements are defined.

For FR2, when the SSB for BFD measurement on one CC is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC, UE is required to measure one of but not both SSB for BFD measurement and CSI-RS. Longer measurement period for SSB based BFD measurement is expected, and no requirements are defined.

8.5B.3 Requirements for CSI-RS based beam failure detection for Redcap

8.5B.3.1 Introduction

The requirements in this clause apply for each CSI-RS resource in the set $\overline{q}_0$ of resource configurations for a serving cell, provided that the CSI-RS resource(s) in set $\overline{q}_0$ for beam failure detection are actually transmitted within the UE active DL BWP during the entire evaluation period specified in clause 8.5B.3.2. UE is not expected to perform beam failure detection measurements on the CSI-RS configured for BFD if the CSI-RS is not QCL-ed, with QCL-TypeD when applicable, with the RS in the active TCI state of any CORESET configured in the UE active BWP.

Table 8.5B.3.1-1: PDCCH transmission parameters for beam failure instance

Attribute	Value for BLER
DCI format	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	16 for 1 Rx UE; 8 for 2 Rx UE

Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	0dB
Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	0dB
Bandwidth (PRBs)	48 for 1 Rx UE; 24 for 2 Rx UE
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed
Note 1 : Note: SCS=60kHz is not applicable for FR1	

8.5B.3.2 Minimum requirement

UE shall be able to evaluate whether the downlink radio link quality on the CSI-RS resource in set $\overline{q}_0$ estimated over the last $T_{Evaluate_BFD_CSI\text{-}RS_Redcap}$ ms period becomes worse than the threshold $Q_{out_LR_CSI\text{-}RS}$ within $T_{Evaluate_BFD_CSI\text{-}RS_Redcap}$ ms period.

The value of $T_{Evaluate_BFD_CSI\text{-}RS_Redcap}$ is defined in Table 8.5B.3.2-1 for FR1.

The value of $T_{Evaluate_BFD_CSI\text{-}RS_Redcap}$ is defined in Table 8.5B.3.2-2 for FR2 with N=1. The requirements of $T_{Evaluate_BFD_CSI\text{-}RS_Redcap}$ apply provided that the CSI-RS for BFD is not in a resource set configured with repetition ON. The requirements shall not apply when the CSI-RS resource in the active TCI state of CORESET is the same CSI-RS resource for BFD and the TCI state information of the CSI-RS resource is not given, wherein the TCI state information means QCL Type-D to SSB for L1-RSRP or CSI-RS with repetition ON.

For FR1,

- $P = \frac{1}{1-\frac{T_{CSI-RS}}{MGRP}}$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the CSI-RS.
- P = 1 when in the monitored cell there are no measurement gaps overlapping with any occasion of the CSI-RS.

For FR2,

- P = 1, when the BFD-RS resource is not overlapped with measurement gap and also not overlapped with SMTC occasion.
- $P = \frac{1}{1-\frac{T_{CSI-RS}}{MGRP}}$, when the BFD-RS resource is partially overlapped with measurement gap and the BFD-RS resource is not overlapped with SMTC occasion ($T_{CSI\text{-}RS}$ < MGRP)
- $P = \frac{1}{1-\frac{T_{CSI-RS}}{T_{SMTCperiod}}}$, when the BFD-RS resource is not overlapped with measurement gap and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{CSI\text{-}RS} < T_{SMTCperiod}$).
- $P = P_{sharing\ factor}$, when the BFD-RS resource is not overlapped with measurement gap and the BFD-RS resource is fully overlapped with SMTC occasion ($T_{CSI\text{-}RS} = T_{SMTCperiod}$).
- $P = \frac{1}{1-\frac{T_{CSI-RS}}{MGRP}-\frac{T_{CSI-RS}}{T_{SMTCperiod}}}$, when the BFD-RS resource is partially overlapped with measurement gap and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{CSI\text{-}RS} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and
  - $T_{SMTCperiod} \neq$ MGRP or
  - $T_{SMTCperiod}$ = MGRP and $T_{CSI\text{-}RS} < 0.5 \times T_{SMTCperiod}$

- $P = \frac{P_{sharing\ factor}}{1-\frac{T_{CSI-RS}}{MGRP}}$, when the BFD-RS resource is partially overlapped with measurement gap and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and $T_{SMTCperiod}$ = MGRP and $T_{CSI-RS} = 0.5 \times T_{SMTCperiod}$

- $P = \frac{1}{1-\frac{T_{CSI-RS}}{T_{SMTCperiod}}}$, when the BFD-RS resource is partially overlapped with measurement gap (T_{CSI-RS} < MGRP) and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with measurement gap.

- $P = \frac{P_{sharing\ factor}}{1-\frac{T_{CSI-RS}}{MGRP}}$, when the BFD-RS resource is partially overlapped with measurement gap and the BFD-RS resource is fully overlapped with SMTC occasion ($T_{CSI-RS} = T_{SMTCperiod}$) and SMTC occasion is partially overlapped with measurement gap ($T_{SMTCperiod}$ < MGRP)

- $P_{sharing\ factor}$ = 1, if the BFD-RS resource outside measurement gap is

  - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and;

  - not overlapped with the RSSI symbols indicated by *ss-RSSI-Measurement* and 1 data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured,

- $P_{sharing\ factor}$ = 3, otherwise.

where,

If the high layer in TS 38.331 [2] signaling of *smtc2* is configured, $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc2*; Otherwise $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc1*.

Note: The overlap between CSI-RS for BFD and SMTC means that CSI-RS for BFD is within the SMTC window duration.

Longer evaluation period would be expected if the combination of the BFD-RS resource, SMTC occasion and measurement gap configurations does not meet pervious conditions.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer BFD evaluation period would be expected during the period $T_{identify_CGI,E-UTRAN}$ when the UE is requested to decode an LTE CGI.

The values of M_{BFD} used in Table 8.5B.3.2-1 and Table 8.5B.3.2-2 are defined as

- M_{BFD} = 10, if the CSI-RS resource(s) in set $\overline{q}_0$ used for BFD is transmitted with Density = 3 and over the bandwidth $\geqslant$ 24 PRBs.

The values of P_{BFD} used in Table 8.5B.3.2-1 and Table 8.5B.3.2-2 are defined as

For each CSI-RS resource in the set $\overline{q}_0$ configured for PCell

- P_{BFD} = 1.

Table 8.5B.3.2-1: Evaluation period $T_{Evaluate_BFD_CSI-RS_Redcap}$ for FR1

Configuration	$T_{Evaluate_BFD_CSI-RS_Redcap}$ (ms) for Redcap UE with 2 Rx	$T_{Evaluate_BFD_CSI-RS_Redcap}$ (ms) for 1 Rx Redcap
no DRX	Max(50, Ceil($M_{BFD} \times P \times P_{BFD}$) × T_{CSI-RS})	Max(50, Ceil(2×$M_{BFD} \times P \times P_{BFD}$) × T_{CSI-RS})

DRX cycle ≤ 320ms	Max(50, Ceil(1.5 × M_{BFD} × P × P_{BFD}) × Max(T_{DRX}, T_{CSI-RS}))	Max(50, Ceil(2×1.5 × M_{BFD} × P × P_{BFD}) × Max(T_{DRX}, T_{CSI-RS}))
DRX cycle > 320ms	Ceil(M_{BFD} × P × P_{BFD}) × T_{DRX}	Ceil(2×M_{BFD} × P × P_{BFD}) × T_{DRX}
Note: T_{CSI-RS} is the periodicity of CSI-RS resource in the set $\overline{q}_0$. T_{DRX} is the DRX cycle length.		

Table 8.5B.3.2-2: Evaluation period $T_{Evaluate_BFD_CSI-RS_Redcap}$ for FR2

Configuration	$T_{Evaluate_BFD_CSI-RS_Redcap}$ (ms)
no DRX	Max(50, Ceil(M_{BFD} × P × N × P_{BFD}) × T_{CSI-RS})
DRX cycle ≤ 320ms	Max(50, Ceil(1.5 × M_{BFD} × P × N × P_{BFD}) × Max(T_{DRX}, T_{CSI-RS}))
DRX cycle > 320ms	Ceil(M_{BFD} × P × N × P_{BFD}) × T_{DRX}
Note: T_{CSI-RS} is the periodicity of CSI-RS resource in the set $\overline{q}_0$. T_{DRX} is the DRX cycle length.	

8.5B.3.3 Measurement restrictions for CSI-RS beam failure detection

The UE is required to be capable of measuring CSI-RS for BFD without measurement gaps. The UE is required to perform the CSI-RS measurements with measurement restrictions as described in the following scenarios.

For both FR1 and FR2, when the CSI-RS for BFD measurement is in the same OFDM symbol as SSB for RLM, BFD, CBD or L1-RSRP measurement, UE is not required to receive CSI-RS for BFD measurement in the PRBs that overlap with an SSB.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has same SCS than CSI-RS for BFD measurement, the UE shall be able to perform CSI-RS measurement without restrictions.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has different SCS than CSI-RS for BFD measurement, the UE shall be able to perform CSI-RS measurement with restrictions according to its capabilities:

- If the UE supports *simultaneousRxDataSSB-DiffNumerology* the UE shall be able to perform CSI-RS measurement without restrictions.
- If the UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both CSI-RS for BFD measurement and SSB. Longer measurement period for CSI-RS based BFD measurement is expected, and no requirements are defined.

For FR1, when the CSI-RS for BFD measurement is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement, UE shall be able to measure the CSI-RS for BFD measurement without any restriction.

For FR2, when the CSI-RS for BFD measurement on one CC is in the same OFDM symbol as SSB for RLM, BFD or L1-RSRP measurement on the same CC or different CCs in the same band, or in the same symbol as SSB for CBD measurement on the same CC or different CCs in the same band when beam failure is detected, UE is required to measure one of but not both CSI-RS for BFD measurement and SSB. Longer measurement period for CSI-RS based BFD measurement is expected, and no requirements are defined.

For FR2, when the CSI-RS for BFD measurement on one CC is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band,

- In the following cases, UE is required to measure one of but not both CSI-RS for BFD measurement and the other CSI-RS. Longer measurement period for CSI-RS based BFD measurement is expected, and no requirements are defined.
  - The CSI-RS for BFD measurement or the other CSI-RS in a resource set configured with repetition ON, or
  - The other CSI-RS is configured in set $\overline{q}_1$ and beam failure is detected, or

- The two CSI-RS-es are not QCL-ed w.r.t. QCL-TypeD, or the QCL information is not known to UE,

- Otherwise, UE shall be able to measure the CSI-RS for BFD measurement without any restriction.

8.5B.4 Minimum requirement for L1 indication for Redcap

When the radio link quality on all the RS resources in set $\overline{q}_0$ is worse than $Q_{out_LR_Redcap}$, layer 1 of the UE shall send a beam failure instance indication to the higher layers,

The beam failure instance evaluation for the RS resources in set $\overline{q}_0$ shall be performed as specified in clause 6 in TS 38.213 [3]. Two successive indications from layer 1 shall be separated by at least $T_{Indication_interval_BFD_Redcap}$.

When DRX is not used, $T_{Indication_interval_BFD_Redcap}$ is max(2ms, $T_{SSB-RS,M}$)) or max(2ms, $T_{CSI-RS,M}$), where $T_{SSB-RS,M}$ and $T_{CSI-RS,M}$ is the shortest periodicity of all RS resources in set $\overline{q}_0$ for the accessed cell, corresponding to either the shortest periodicity of the SSB in the set $\overline{q}_0$ or CSI-RS resource in the set $\overline{q}_0$.

When DRX is used, for SSB based link quality measurement,

- $T_{Indication_interval_BFD_Redcap}$ = Max(1.5 × DRX_cycle_length, 1.5 × $T_{SSB-RS,M}$), if DRX_cycle_length ≤ 320ms,

- $T_{Indication_interval_BFD_Redcap}$ = DRX_cycle_length, if DRX_cycle_length > 320ms.

When DRX is used, for CSI-RS based link quality measurement,

- $T_{Indication_interval_BFD_Redcap}$ = Max(1.5 × DRX_cycle_length, 1.5 × $T_{CSI-RS,M}$), if DRX_cycle_length ≤ 320ms,

- $T_{Indication_interval_BFD_Redcap}$ = DRX_cycle_length, if DRX_cycle_length > 320ms.

For HD-FDD UE, the above conditions and requirements for $T_{Indication_interval_BFD_Redcap}$ apply given that, for each BFD-RS configuration, at least one BFD-RS sample must fall with DL occasion within an indication period.

8.5B.5 Requirements for SSB based candidate beam detection for Redcap

8.5B.5.1 Introduction

The requirements in this clause apply for each SSB resource in the set $\overline{q}_1$ configured for a serving cell, provided that the SSBs configured for candidate beam detection are actually transmitted within UE active DL BWP during the entire evaluation period specified in clause 8.5.5.2.

8.5B.5.2 Minimum requirement

Upon request the UE shall be able to evaluate whether the L1-RSRP measured on the configured SSB resource in set $\overline{q}_1$ estimated over the last $T_{Evaluate_CBD_SSB}$ ms period becomes better than the threshold $Q_{in_LR_RedCap}$ provided SSB_RP and SSB Ês/Iot are according to Annex Table B.2.4.1 for a corresponding band.

The UE shall monitor the configured SSB resources using the evaluation period in table 8.5B.5.2-1 and 8.5B.5.2-2 corresponding to the non-DRX mode, if the configured DRX cycle ≤ 320ms.

The value of $T_{Evaluate_CBD_SSB_Redcap}$ is defined in Table 8.5B.5.2-1 for FR1.

The value of $T_{Evaluate_CBD_SSB_Redcap}$ is defined in Table 8.5B.5.2-2 for FR2 with scaling factor N=8.

where,

For FR1,

- $P = \frac{1}{1-\frac{T_{SSB}}{MGRP}}$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the SSB,
- P = 1 when in the monitored cell there are no measurement gaps overlapping with any occasion of the SSB.

For FR2,

- $P = \frac{1}{1-\frac{T_{SSB}}{T_{SMTCperiod}}}$, when candidate beam detection RS is not overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$).
- P is $P_{sharing\ factor}$, when candidate beam detection RS is not overlapped with measurement gap and candidate beam detection RS is fully overlapped with SMTC period ($T_{SSB} = T_{SMTCperiod}$).
- $P = \frac{1}{1-\frac{T_{SSB}}{MGRP}-\frac{T_{SSB}}{T_{SMTCperiod}}}$, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and
  - $T_{SMTCperiod} \neq$ MGRP or
  - $T_{SMTCperiod}$ = MGRP and $T_{SSB} < 0.5 \times T_{SMTCperiod}$
- $P = \frac{P_{sharing\ factor}}{1-\frac{T_{SSB}}{MGRP}}$, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and $T_{SMTCperiod}$ = MGRP and $T_{SSB} = 0.5 \times T_{SMTCperiod}$
- $P = \frac{1}{1-\frac{T_{SSB}}{T_{SMTCperiod}}}$, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with measurement gap
- $P = \frac{P_{sharing\ factor}}{1-\frac{T_{SSB}}{MGRP}}$, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is fully overlapped with SMTC occasion ($T_{SSB} = T_{SMTCperiod}$) and SMTC occasion is partially overlapped with measurement gap ($T_{SMTCperiod} <$ MGRP)
- $P_{sharing\ factor}$ = 1, if the candidate beam detection RS outside measurement gap is
  - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and;
  - not overlapped with the RSSI symbols indicated by *ss-RSSI-Measurement* and 1 data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured
- $P_{sharing\ factor}$ = 3, otherwise.

where,

If the high layer in TS 38.331 [2] signaling of *smtc2* is present, $T_{SMTCperiod}$ follows *smtc2*; Otherwise $T_{SMTCperiod}$ follows *smtc1*.

Longer evaluation period would be expected if the combination of the CBD-RS resource, SMTC occasion and measurement gap configurations does not meet pervious conditions.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer CBD evaluation period would be expected during the period $T_{identify_CGI,E-UTRAN}$ when the UE is requested to decode an LTE CGI.

The values of P_{CBD} used in Table 8.5.5.2-1 and Table 8.5.5.2-2 are defined as

For each SSB resource in the set $\overline{q}_1$ configured for PCell

- $P_{CBD} = 1$.

Table 8.5B.5.2-1: Evaluation period $T_{Evaluate_CBD_SSB_Redcap}$ for FR1

Configuration	$T_{Evaluate_CBD_SSB_Redcap}$ (ms)
non-DRX, DRX cycle ≤ 320ms	Max(25, Ceil($3 \times P \times P_{CBD}$) $\times T_{SSB}$)
DRX cycle > 320ms	Ceil($3 \times P \times P_{CBD}$) $\times T_{DRX}$
Note: T_{SSB} is the periodicity of SSB in the set $\overline{q}_1$. T_{DRX} is the DRX cycle length.	

Table 8.5B.5.2-2: Evaluation period $T_{Evaluate_CBD_SSB_Redcap}$ for FR2

Configuration	$T_{Evaluate_CBD_SSB_Redcap}$ (ms)
non-DRX, DRX cycle ≤ 320ms	Max(25, Ceil($3 \times P \times N \times P_{CBD}$) $\times T_{SSB}$)
DRX cycle > 320ms	Ceil($3 \times P \times N \times P_{CBD}$) $\times T_{DRX}$
Note: T_{SSB} is the periodicity of SSB in the set $\overline{q}_1$. T_{DRX} is the DRX cycle length.	

8.5B.5.3 Measurement restriction for SSB based candidate beam detection

For FR1, when the SSB for CBD measurement is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for CBD measurement without any restrictions;
- If SSB and CSI-RS have different SCS-es,
  - If UE supports *simultaneousRxDataSSB-DiffNumerology*, UE shall be able to measure the SSB for CBD measurement without any restriction;
  - If UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both SSB for CBD measurement and CSI-RS. Longer measurement period for SSB based CBD measurement is expected, and no requirements are defined.

For FR2, when the SSB for CBD measurement on one CC is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC, UE is required to measure one of but not both SSB for CBD measurement and CSI-RS. Longer measurement period for SSB based CBD measurement is expected, and no requirements are defined.

8.5B.6 Requirements for CSI-RS based candidate beam detection for Redcap

8.5B.6.1 Introduction

The requirements in this clause apply for each CSI-RS resource in the set $\overline{q}_1$ configured for a serving cell, provided that the CSI-RS resources configured for candidate beam detection are actually transmitted within UE active DL BWP during the entire evaluation period specified in clause 8.5B.6.2.

8.5B.6.2 Minimum requirement

Upon request the UE shall be able to evaluate whether the L1-RSRP measured on the configured CSI-RS resource in set $\bar{q}_1$ estimated over the last $T_{Evaluate_CBD_CSI\text{-}RS_Redcap}$ [ms] period becomes better than the threshold $Q_{in_LR_RedCap}$ within $T_{Evaluate_CBD_CSI\text{-}RS_Redcap}$ [ms] period provided CSI-RS Ês/Iot is according to Annex Table B.2.4.2 for a corresponding band.

The UE shall monitor the configured CSI-RS resources using the evaluation period in table 8.5B.6.2-1 and 8.5B.6.2-2 corresponding to the non-DRX mode, if the configured DRX cycle ≤ 320ms.

The value of $T_{Evaluate_CBD_CSI\text{-}RS_Redcap}$ is defined in Table 8.5B.6.2-1 for FR1.

The value of $T_{Evaluate_CBD_CSI\text{-}RS_Redcap}$ is defined in Table 8.5B.6.2-2 for FR2 with scaling factor N=8.

For FR1,

- $P = \frac{1}{1-\frac{T_{CSI-RS}}{MGRP}}$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the CSI-RS; and

- P = 1 when in the monitored cell there are no measurement gaps overlapping with any occasion of the CSI-RS.

For FR2,

- P = 1, when candidate beam detection RS is not overlapped with measurement gap and also not overlapped with SMTC occasion.

- $P = \frac{1}{1-\frac{T_{CSI-RS}}{MGRP}}$ when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is not overlapped with SMTC occasion ($T_{CSI\text{-}RS}$ < MGRP)

- $P = \frac{1}{1-\frac{T_{CSI-RS}}{T_{SMTCperiod}}}$, when candidate beam detection RS is not overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{CSI\text{-}RS} < T_{SMTCperiod}$).

- $P = P_{sharing\ factor}$, when candidate beam detection RS is not overlapped with measurement gap and candidate beam detection RS is fully overlapped with SMTC occasion ($T_{CSI\text{-}RS} = T_{SMTCperiod}$).

- $P = \frac{1}{1-\frac{T_{CSI-RS}}{MGRP}-\frac{T_{CSI-RS}}{T_{SMTCperiod}}}$,, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{CSI\text{-}RS} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and

  - $T_{SMTCperiod} \neq$ MGRP or

  - $T_{SMTCperiod}$ = MGRP and $T_{CSI\text{-}RS} < 0.5 \times T_{SMTCperiod}$

- $P = \frac{P_{\text{sharing factor}}}{1-\frac{T_{CSI-RS}}{MGRP}}$, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{CSI\text{-}RS} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and $T_{SMTCperiod}$ = MGRP and $T_{CSI\text{-}RS} = 0.5 \times T_{SMTCperiod}$

- $P = \frac{1}{1-\frac{T_{CSI-RS}}{T_{SMTCperiod}}}$, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{CSI\text{-}RS} < T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with measurement gap

- $P = \frac{3}{1-\frac{T_{CSI-RS}}{MGRP}}$,, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is fully overlapped with SMTC occasion ($T_{CSI\text{-}RS} = T_{SMTCperiod}$) and SMTC occasion is partially overlapped with measurement gap ($T_{SMTCperiod}$ < MGRP)

- $P_{sharing\ factor}$ = 1, if the candidate beam detection RS outside measurement gap is

- not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and;

- not overlapped with the RSSI symbols indicated by *ss-RSSI-Measurement* and 1 data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured.

- $P_{sharing\ factor} = 3$, otherwise.

where,

If the high layer in TS 38.331 [2] signaling of *smtc2* is present, $T_{SMTCperiod}$ follows *smtc2*; Otherwise $T_{SMTCperiod}$ follows *smtc1*.

Note: The overlap between CSI-RS for CBD and SMTC means that CSI-RS for CBD is within the SMTC window duration.

Longer evaluation period would be expected if the combination of the CBD-RS resource, SMTC occasion and measurement gap configurations does not meet pervious conditions.

Longer evaluation period would be expected if the CSI-RS is on the same OFDM symbols with RLM, BFD, BM-RS, or other CBD-RS, according to the measurement restrictions defined in clause 8.5.6.3.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer CBD evaluation period would be expected during the period $T_{identify_CGI,E\text{-}UTRAN}$ when the UE is requested to decode an LTE CGI.

The values of M_{CBD} used in Table 8.5B.6.2-1 and Table 8.5B.6.2-2 are defined as

- $M_{CBD} = 3$, if the CSI-RS resource configured in the set $\bar{q}_1$ is transmitted with Density = 3 and over the bandwidth $\geqslant$ 24 PRBs.

The values of P_{CBD} used in Table 8.5B.6.2-1 and Table 8.5B.6.2-2 are defined as

For each CSI-RS resource in the set $\bar{q}_1$ configured for PCell

- $P_{CBD} = 1$.

Table 8.5B.6.2-1: Evaluation period $T_{Evaluate_CBD_CSI\text{-}RS_Redcap}$ for FR1

Configuration	$T_{EvaluateC_CBD_CSI\text{-}RS_Redcap}$ (ms)
non-DRX, DRX cycle ≤ 320ms	$\max(25, \text{Ceil}(M_{CBD} \times P \times P_{CBD}) \times T_{CSI\text{-}RS})$
DRX cycle > 320ms	$\text{Ceil}(M_{CBD} \times P \times P_{CBD}) \times T_{DRX}$
Note: $T_{CSI\text{-}RS}$ is the periodicity of CSI-RS resource in the set $\bar{q}_1$. T_{DRX} is the DRX cycle length.	

Table 8.5B.6.2-2: Evaluation period $T_{Evaluate_CBD_CSI\text{-}RS_Redcap}$ for FR2

Configuration	$T_{Evaluate_CBD_CSI\text{-}RS_Redcap}$ (ms)
non-DRX, DRX cycle ≤ 320ms	$\max(25, \text{Ceil}(M_{CBD} \times P \times N \times P_{CBD}) \times T_{CSI\text{-}RS})$
DRX cycle > 320ms	$\text{Ceil}(M_{CBD} \times P \times N \times P_{CBD}) \times T_{DRX}$
Note: $T_{CSI\text{-}RS}$ is the periodicity of CSI-RS resource in the set $\bar{q}_1$. T_{DRX} is the DRX cycle length.	

8.5B.6.3 Measurement restriction for CSI-RS based candidate beam detection

For both FR1 and FR2, when the CSI-RS for CBD measurement is in the same OFDM symbol as SSB for RLM, BFD, CBD or L1-RSRP measurement, UE is not required to receive CSI-RS for CBD measurement in the PRBs that overlap with an SSB.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has same SCS than CSI-RS for CBD measurement, the UE shall be able to perform CSI-RS based CBD measurement without restrictions.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has different SCS than CSI-RS for CBD measurement, the UE shall be able to perform CSI-RS based CBD measurement with restrictions according to its capabilities:

- If the UE supports *simultaneousRxDataSSB-DiffNumerology* the UE shall be able to perform CSI-RS based CBD measurement for without restrictions.

- If the UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both CSI-RS for CBD measurement and SSB. Longer measurement period for CSI-RS based CBD measurement is expected, and no requirements are defined.

For FR1, when the CSI-RS for CBD measurement is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement, UE shall be able to measure the CSI-RS for CBD measurement without any restriction.

For FR2, when the CSI-RS for CBD measurement on one CC is in the same OFDM symbol as SSB for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both CSI-RS for CBD measurement and SSB. Longer evaluation period for CSI-RS based CBD measurement is expected, and no requirements are defined.

For FR2, when the CSI-RS for CBD measurement on one CC is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both CSI-RS for CBD measurement and the other CSI-RS. Longer evaluation period for CSI-RS based CBD measurement is expected, and no requirements are defined.

8.5B.7 Scheduling availability of UE during beam failure detection for Redcap

Scheduling availability restrictions when the UE is performing beam failure detection are described in the following clauses.

8.5B.7.1 Scheduling availability of UE performing beam failure detection with a same subcarrier spacing as PDSCH/PDCCH on FR1

There are no scheduling restrictions due to beam failure detection performed on SSB and CSI-RS configured for BFD with the same SCS as PDSCH or PDCCH in FR1.

8.5B.7.2 Scheduling availability of UE performing beam failure detection with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UEs which support *simultaneousRxDataSSB-DiffNumerology* [14] there are no restrictions on scheduling availability due to beam failure detection when SSB is configured as BFD. For UEs which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to beam failure detection when SSB is configured as BFD.

- The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH or CSI-RS for tracking or CSI-RS for CQI on SSB symbols to be measured for beam failure detection.

8.5B.7.3 Scheduling availability of UE performing beam failure detection on FR2

The following scheduling restriction applies due to beam failure detection.

- For the case where no RSs are provided for BFD, or when CSI-RS is configured for BFD is explicitly configured and is type-D QCLed with active TCI state for PDCCH or PDSCH, and the CSI-RS is not in a CSI-RS resource set with repetition ON
  - There are no scheduling restrictions due to beam failure detection performed based on the CSI-RS.
- Otherwise
  - The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH or CSI-RS for tracking or CSI-RS for CQI on BFD-RS resource symbols to be measured for beam failure detection.

For FR2, if following conditions are met,

- UE has been notified about system information update through paging,
- The gap between UE's reception of PDCCH that UE monitors in the Type2-PDCCH CSS set and that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots,

For the SSB and CORESET for RMSI scheduling multiplexing patterns 3, UE is expected to receive the PDCCH that UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured for BFD mesurement; and

For the SSB and CORESET for RMSI scheduling multiplexing patterns 2, UE is expected to receive PDSCH that corresponds to the PDCCH that UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured for BFD mesurement.

8.5B.8 Scheduling availability of UE during candidate beam detection for Redcap

Scheduling availability restrictions when the UE is performing L1-RSRP measurement for candidate beam detection are described in the following clauses.

8.5B.8.1 Scheduling availability of UE performing L1-RSRP measurement with a same subcarrier spacing as PDSCH/PDCCH on FR1

There are no scheduling restrictions due to L1-RSRP measurement performed on SSB and CSI-RS configured as link recovery detection resource with the same SCS as PDSCH or PDCCH in FR1.

8.5B.8.2 Scheduling availability of UE performing L1-RSRP measurement with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UEs which support *simultaneousRxDataSSB-DiffNumerology* [14] there are no restrictions on scheduling availability due to L1-RSRP measurement based on SSB as link recovery detection resource. For UEs which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to L1-RSRP measurement based on SSB configured as link recovery detection resource.

- The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH, TRS, CSI-RS for tracking or CSI-RS for CQI on SSB symbols to be measured for L1-RSRP.

8.5B.8.3 Scheduling availability of UE performing L1-RSRP measurement on FR2

The following scheduling restriction applies due to candidate beam detection

- The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH, CSI-RS for tracking or CSI-RS for CQI on reference symbols to be measured for candidate beam detection.

For FR2, if following conditions are met,

- UE has been notified about system information update through paging,

- The gap between UE's reception of PDCCH that UE monitors in the Type2-PDCCH CSS set and that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots,

For the SSB and CORESET for RMSI scheduling multiplexing patterns 3, UE is expected to receive the PDCCH that UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured for CBD mesurement; and

For the SSB and CORESET for RMSI scheduling multiplexing patterns 2, UE is expected to receive PDSCH that corresponds to the PDCCH that UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured for CBD mesurement.

8.5B.9 Minimum requirement at transitions for beam failure detection for Redcap

When the UE transitions between BFD CD-SSB resource and BFD NCD-SSB resource due to BWP switching during one evaluation period, the UE shall use an evaluation period that is the maximum of the evaluation period corresponding to the first SSB type and the second SSB type after the BWP switching. Subsequent to this duration, the UE shall use an evaluation period corresponding to the second SSB type for each BFD-RS resource.

The requirements in clause 8.5.10 shall also apply except the scenarios described above.

8.5C Link Recovery Procedures for Satellite Access

8.5C.1 Introduction

The UE shall assess the downlink radio link quality of a serving cell based on the reference signal in the set $\overline{q}_0$ as specified in TS 38.213 [3] in order to detect beam failure on PCell and the UE is configured with only PCell, which is served by satellite access node (SAN).

The RS resource configurations in the set $\overline{q}_0$ on PCell can be periodic CSI-RS resources and/or SSBs.

On each RS resource configuration in the set $\overline{q}_0$, the UE shall estimate the radio link quality and compare it to the threshold Q_{out_LR} for the purpose of accessing downlink radio link quality of the serving cell beams.

The threshold Q_{out_LR} is defined as the level at which the downlink radio level link of a given resource configuration on set e cannot be reliably received and shall correspond to the $BLER_{out}$ = 10% block error rate of a hypothetical PDCCH transmission. For SSB based beam failure detection, $Q_{out_LR_SSB}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 8.5.2.1C-1. For CSI-RS based beam failure detection, $Q_{out_LR_CSI\text{-}RS}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 8.5C.3.1-1.

Upon request the UE shall deliver configuration indexes from the set $\overline{q}_1$ as specified in TS 38.213 [3] , to higher layers, and the corresponding L1-RSRP measurement provided that the measured L1-RSRP is equal to or better than the threshold Q_{in_LR}, which is indicated by higher layer parameter *rsrp-ThresholdSSB*. The UE applies the Q_{in_LR} threshold to the L1-RSRP measurement obtained from an SSB. The UE applies the Q_{in_LR} threshold to the L1-RSRP measurement obtained for a CSI-RS resource after scaling a respective CSI-RS reception power with a value provided by higher layer parameter *powerControlOffsetSS*. The RS resource configurations in the set $\overline{q}_1$ can be periodic CSI-RS resources or SSBs or both SSB and CSI-RS resources.

8.5C.2 Requirements for SSB based beam failure detection

8.5C.2.1 Introduction

The requirements in this clause apply for each SSB resource in the set e configured for a serving cell, provided that the SSB configured for beam failure detection is actually transmitted within the UE active DL BWP during the entire evaluation period specified in clause 8.5C.2.2.

Table 8.5.2.1C-1: PDCCH transmission parameters for beam failure instance

Attribute	Value for BLER
DCI format	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	8
Ratio of hypothetical PDCCH RE energy to average SSS RE energy	0dB
Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	0dB
Bandwidth (PRBs)	24
Sub-carrier spacing (kHz)	Same as the SCS of RMSI CORESET
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed

8.5C.2.2 Minimum requirement

UE shall be able to evaluate whether the downlink radio link quality on the configured SSB resource in set $\bar{q}_0$ estimated over the last $T_{Evaluate_BFD_SSB}$ ms period becomes worse than the threshold $Q_{out_LR_SSB}$ within $T_{Evaluate_BFD_SSB}$ ms period.

The value of $T_{Evaluate_BFD_SSB}$ is defined in Table 8.5C.2.2-1 for FR1.

P value for an RLM-RS resource to be measured is defined as

- $P_{sharing\ factor} * N_{total} / N_{outside_MG}$ with $N_{available} = 0$
- $N_{total} / N_{available}$ with $N_{available} > 0$

For a window W of duration max($T_{L1,}$ MGRP_max), where MGRP max is the maximum MGRP across all configured per-UE measurement gaps, and starting at the beginning of any RLM-RS resource occasion:

- N_{total} is the total number of RLM-RS resource occasions within the window, including those overlapped with measurement gap occasions or SMTC occasions within the window W, and
- $N_{outside_MG}$ is the number of RLM-RS resource occasions that are not overlapped with any measurement gap occasion within the window W
- $N_{available}$ is
  - the number of RLM-RS resource occasions that are not overlapped with any measurement gap occasion nor any SMTC occasion within the window W, if UE does not support *parallelMeasurementWithoutRestriction* and LEO satellites are measured for intra-frequency measurement, and
  - same as $N_{outside_MG}$, otherwise
- T_{L1} is periodicity of the target RLM-RS
- $P_{sharing\ factor} = 3$.

Longer evaluation period would be expected if the combination of BFD-RS resource, SMTC occasion and measurement gap configurations does not meet pervious conditions.

For an FR1serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

Table 8.5C.2.2-1: Evaluation period $T_{Evaluate_BFD_SSB}$ for FR1

Configuration	$T_{Evaluate_BFD_SSB}$ (ms)
no DRX	Max(50, Ceil(5 × P) × T_{SSB})
DRX cycle ≤ 320ms	Max(50, Ceil(7.5 × P) × Max(T_{DRX},T_{SSB}))
DRX cycle > 320ms	Ceil(5 × P) × T_{DRX}
Note: T_{SSB} is the periodicity of SSB in the set $\overline{q}_0$. T_{DRX} is the DRX cycle length.	

8.5C.2.3 Measurement restriction for SSB based beam failure detection

The UE is required to be capable of measuring SSB for BFD without measurement gaps. The UE is required to perform the SSB measurements with measurement restrictions as described in the following scenarios.

For FR1, when the SSB for BFD measurement is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for BFD measurement without any restriction;
- If SSB and CSI-RS have different SCS,
  - If UE supports *simultaneousRxDataSSB-DiffNumerology*, UE shall be able to measure the SSB for BFD measurement without any restriction;
  - If UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both SSB for BFD measurement and CSI-RS. Longer measurement period for SSB based BFD measurement is expected, and no requirements are defined.

8.5C.3 Requirements for CSI-RS based beam failure detection

8.5C.3.1 Introduction

The requirements in this clause apply for each CSI-RS resource in the set $\overline{q}_0$ of resource configurations for a serving cell, provided that the CSI-RS resource(s) in set $\overline{q}_0$ for beam failure detection are actually transmitted within the UE active DL BWP during the entire evaluation period specified in clause 8.5C.3.2. UE is not expected to perform beam failure detection measurements on the CSI-RS configured for BFD if the CSI-RS is not QCL-ed, with QCL-TypeD when applicable, with the RS in the active TCI state of any CORESET configured in the UE active BWP.

Table 8.5C.3.1-1: PDCCH transmission parameters for beam failure instance

Attribute	Value for BLER
DCI format	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	8
Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	0dB
Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	0dB
Bandwidth (PRBs)	48
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size

REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed

8.5C.3.2 Minimum requirement

UE shall be able to evaluate whether the downlink radio link quality on the CSI-RS resource in set $\overline{q}_0$ estimated over the last $T_{Evaluate_BFD_CSI-RS}$ ms period becomes worse than the threshold $Q_{out_LR_CSI-RS}$ within $T_{Evaluate_BFD_CSI-RS}$ ms period.

The value of $T_{Evaluate_BFD_CSI-RS}$ is defined in Table 8.5C.3.2-1 for FR1.

The requirements of $T_{Evaluate_BFD_CSI-RS}$ apply provided that the CSI-RS for BFD is not in a resource set configured with repetition ON. The requirements shall not apply when the CSI-RS resource in the active TCI state of CORESET is the same CSI-RS resource for BFD and the TCI state information of the CSI-RS resource is not given, wherein the TCI state information means QCL Type-D to SSB for L1-RSRP or CSI-RS with repetition ON.

P value for an RLM-RS resource to be measured is defined as

- $P_{sharing\ factor} * N_{total} / N_{outside_MG}$ with $N_{available} = 0$
- $N_{total} / N_{available}$ with $N_{available} > 0$

For a window W of duration max($T_{L1,}$ MGRP_max), where MGRP max is the maximum MGRP across all configured per-UE measurement gaps, and starting at the beginning of any RLM-RS resource occasion:

- N_{total} is the total number of RLM-RS resource occasions within the window, including those overlapped with measurement gap occasions or SMTC occasions within the window W, and
- $N_{outside_MG}$ is the number of RLM-RS resource occasions that are not overlapped with any measurement gap occasion within the window W
- $N_{available}$ is
  - the number of RLM-RS resource occasions that are not overlapped with any measurement gap occasion nor any SMTC occasion within the window W, if UE does not support *parallelMeasurementWithoutRestriction* and LEO satellites are measured for intra-frequency measurement, and
  - same as $N_{outside_MG}$, otherwise
- T_{L1} is periodicity of the target RLM-RS
- $P_{sharing\ factor} = 3$.

Note: The overlap between CSI-RS for BFD and SMTC means that CSI-RS for BFD is within the SMTC window duration.

Longer evaluation period would be expected if the combination of the BFD-RS resource, SMTC occasion and measurement gap configurations does not meet pervious conditions.

For an FR1 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

The values of M_{BFD} used in Table 8.5C.3.2-1 and Table 8.5C.3.2-2 are defined as

- $M_{BFD} = 10$, if the CSI-RS resource(s) in set $\overline{q}_0$ used for BFD is transmitted with Density = 3 and over the bandwidth $\geqslant$ 24 PRBs.

The values of P_{BFD} used in Table 8.5C.3.2-1 and Table 8.5C.3.2-2 are defined as

For each CSI-RS resource in the set $\overline{q}_0$ configured for PCell SA

- $P_{BFD} = 1$.

Table 8.5C.3.2-1: Evaluation period $T_{Evaluate_BFD_CSI-RS}$ for FR1

Configuration	$T_{Evaluate_BFD_CSI-RS}$ (ms)
no DRX	$Max(50, Ceil(M_{BFD} \times P \times P_{BFD}) \times T_{CSI-RS})$
DRX cycle ≤ 320ms	$Max(50, Ceil(1.5 \times M_{BFD} \times P \times P_{BFD}) \times Max(T_{DRX}, T_{CSI-RS}))$
DRX cycle > 320ms	$Ceil(M_{BFD} \times P \times P_{BFD}) \times T_{DRX}$
Note: T_{CSI-RS} is the periodicity of CSI-RS resource in the set $\overline{q}_0$. T_{DRX} is the DRX cycle length.	

8.5C.3.3 Measurement restrictions for CSI-RS beam failure detection

The UE is required to be capable of measuring CSI-RS for BFD without measurement gaps. The UE is required to perform the CSI-RS measurements with measurement restrictions as described in the following scenarios.

For FR1, when the CSI-RS for BFD measurement is in the same OFDM symbol as SSB for RLM, BFD, CBD or L1-RSRP measurement, UE is not required to receive CSI-RS for BFD measurement in the PRBs that overlap with an SSB.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has same SCS than CSI-RS for BFD measurement, the UE shall be able to perform CSI-RS measurement without restrictions.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has different SCS than CSI-RS for BFD measurement, the UE shall be able to perform CSI-RS measurement with restrictions according to its capabilities:

- If the UE supports *simultaneousRxDataSSB-DiffNumerology* the UE shall be able to perform CSI-RS measurement without restrictions.
- If the UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both CSI-RS for BFD measurement and SSB. Longer measurement period for CSI-RS based BFD measurement is expected, and no requirements are defined.

For FR1, when the CSI-RS for BFD measurement is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement, UE shall be able to measure the CSI-RS for BFD measurement without any restriction.

8.5C.4 Minimum requirement for L1 indication

When the radio link quality on all the RS resources in set $\overline{q}_0$ is worse than Q_{out_LR}, layer 1 of the UE shall send a beam failure instance indication to the higher layers

The beam failure instance evaluation for the RS resources in set $\overline{q}_0$ shall be performed as specified in clause 6 in TS 38.213 [3]. Two successive indications from layer 1 shall be separated by at least $T_{Indication_interval_BFD}$.

When DRX is not used, $T_{Indication_interval_BFD}$ is max(2ms, $T_{SSB-RS,M}$)) or max(2ms, $T_{CSI-RS,M}$), where $T_{SSB-RS,M}$ and $T_{CSI-RS,M}$ is the shortest periodicity of all RS resources in set $\overline{q}_0$ for the accessed cell, corresponding to either the shortest periodicity of the SSB in the set $\overline{q}_0$ or CSI-RS resource in the set $\overline{q}_0$.

When DRX is used, for SSB based link quality measurement,

- $T_{Indication_interval_BFD}$ = Max(1.5 × DRX_cycle_length, 1.5 × $T_{SSB-RS,M}$), if DRX_cycle_length ≤ 320ms,
- $T_{Indication_interval_BFD}$ = DRX_cycle_length, if DRX_cycle_length > 320ms.

When DRX is used, for CSI-RS based link quality measurement,

- $T_{Indication_interval_BFD}$ = Max(1.5 × DRX_cycle_length, 1.5 × $T_{CSI-RS,M}$), if DRX_cycle_length ≤ 320ms,
- $T_{Indication_interval_BFD}$ = DRX_cycle_length, if DRX_cycle_length > 320ms.

8.5C.5 Requirements for SSB based candidate beam detection

8.5C.5.1 Introduction

The requirements in this clause apply for each SSB resource in the set $\overline{q}_1$ configured for a serving cell, provided that the SSBs configured for candidate beam detection are actually transmitted within UE active DL BWP during the entire evaluation period specified in clause 8.5C.5.2.

8.5C.5.2 Minimum requirement

Upon request the UE shall be able to evaluate whether the L1-RSRP measured on the configured SSB resource in set $\overline{q}_1$ estimated over the last $T_{Evaluate_CBD_SSB}$ ms period becomes better than the threshold Q_{in_LR} provided SSB_RP and SSB Ês/Iot are according to Annex Table B. 2.x.y for a corresponding band.

The UE shall monitor the configured SSB resources using the evaluation period in table 8.5C.5.2-1 and 8.5C.5.2-2 corresponding to the non-DRX mode, if the configured DRX cycle ≤ 320ms.

The value of $T_{Evaluate_CBD_SSB}$ is defined in Table 8.5C.5.2-1 for FR1.

where,

P value for an RLM-RS resource to be measured is defined as

- $P_{sharing\ factor} * N_{total} / N_{outside_MG}$ with $N_{available} = 0$
- $N_{total} / N_{available}$ with $N_{available} > 0$

For a window W of duration max($T_{L1,}$ MGRP_max), where MGRP max is the maximum MGRP across all configured per-UE measurement gaps, and starting at the beginning of any RLM-RS resource occasion:

- N_{total} is the total number of RLM-RS resource occasions within the window, including those overlapped with measurement gap occasions or SMTC occasions within the window W, and
- $N_{outside_MG}$ is the number of RLM-RS resource occasions that are not overlapped with any measurement gap occasion within the window W
- $N_{available}$ is
  - the number of RLM-RS resource occasions that are not overlapped with any measurement gap occasion nor any SMTC occasion within the window W, if UE does not support *parallelMeasurementWithoutRestriction* and LEO satellites are measured for intra-frequency measurement, and
  - same as $N_{outside_MG}$, otherwise
- T_{L1} is periodicity of the target RLM-RS
- $P_{sharing\ factor} = 3$.

Longer evaluation period would be expected if the combination of the CBD-RS resource, SMTC occasion and measurement gap configurations does not meet pervious conditions.

For an FR1 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

The values of P_{CBD} used in Table 8.5C.5.2-1 and Table 8.5C.5.2-2 are defined as

For each SSB resource in the set $\overline{q}_1$ configured for PCell.

- $P_{CBD} = 1$.

Table 8.5C.5.2-1: Evaluation period $T_{Evaluate_CBD_SSB}$ for FR1

Configuration	$T_{Evaluate_CBD_SSB}$ (ms)

non-DRX, DRX cycle ≤ 320ms	Max(25, Ceil($3 \times P \times P_{CBD}$) $\times T_{SSB}$)
DRX cycle > 320ms	Ceil($3 \times P \times P_{CBD}$) $\times T_{DRX}$
Note: T_{SSB} is the periodicity of SSB in the set $\overline{q}_1$. T_{DRX} is the DRX cycle length.	

8.5C.5.3 Measurement restriction for SSB based candidate beam detection

For FR1, when the SSB for CBD measurement is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for CBD measurement without any restrictions;
- If SSB and CSI-RS have different SCS-es,
  - If UE supports *simultaneousRxDataSSB-DiffNumerology*, UE shall be able to measure the SSB for CBD measurement without any restriction;
  - If UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both SSB for CBD measurement and CSI-RS. Longer measurement period for SSB based CBD measurement is expected, and no requirements are defined.

8.5C.6 Requirements for CSI-RS based candidate beam detection

8.5C.6.1 Introduction

The requirements in this clause apply for each CSI-RS resource in the set $\overline{q}_1$ configured for a serving cell, provided that the CSI-RS resources configured for candidate beam detection are actually transmitted within UE active DL BWP during the entire evaluation period specified in clause 8.5C.6.2.

8.5C.6.2 Minimum requirement

Upon request the UE shall be able to evaluate whether the L1-RSRP measured on the configured CSI-RS resource in set $\overline{q}_1$ estimated over the last $T_{Evaluate_CBD_CSI-RS}$ [ms] period becomes better than the threshold Q_{in_LR} within $T_{Evaluate_CBD_CSI-RS}$ [ms] period provided CSI-RS Ês/Iot is according to Annex Table B.2. x.y for a corresponding band.

The UE shall monitor the configured CSI-RS resources using the evaluation period in table 8.5C.6.2-1 and 8.5C.6.2-2 corresponding to the non-DRX mode, if the configured DRX cycle ≤ 320ms.

The value of $T_{Evaluate_CBD_CSI-RS}$ is defined in Table 8.5C.6.2-1 for FR1.

P value for an RLM-RS resource to be measured is defined as

- $P_{sharing\ factor} * N_{total} / N_{outside_MG}$ with $N_{available} = 0$
- $N_{total} / N_{available}$ with $N_{available} > 0$

For a window W of duration max($T_{L1,}$ MGRP_max), where MGRP max is the maximum MGRP across all configured per-UE measurement gaps, and starting at the beginning of any RLM-RS resource occasion:

- N_{total} is the total number of RLM-RS resource occasions within the window, including those overlapped with measurement gap occasions or SMTC occasions within the window W, and
- $N_{outside_MG}$ is the number of RLM-RS resource occasions that are not overlapped with any measurement gap occasion within the window W
- $N_{available}$ is

- the number of RLM-RS resource occasions that are not overlapped with any measurement gap occasion nor any SMTC occasion within the window W, if UE does not support *parallelMeasurementWithoutRestriction* and LEO satellites are measured for intra-frequency measurement, and
- same as $N_{outside_MG}$, otherwise

- T_{L1} is periodicity of the target RLM-RS
- $P_{sharing\ factor}$ = 3.

Note: The overlap between CSI-RS for CBD and SMTC means that CSI-RS for CBD is within the SMTC window duration.

Longer evaluation period would be expected if the combination of the CBD-RS resource, SMTC occasion and measurement gap configurations does not meet pervious conditions.

For an FR1 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

The values of M_{CBD} used in Table 8.5C.6.2-1 and Table 8.5C.6.2-2 are defined as

- M_{CBD} = 3, if the CSI-RS resource configured in the set $\bar{q}_1$ is transmitted with Density = 3 and over the bandwidth $\geqslant$ 24 PRBs.

The values of P_{CBD} used in Table 8.5C.6.2-1 are defined as

For each CSI-RS resource in the set $\bar{q}_1$ configured for SA

- P_{CBD} = 1.

Table 8.5C.6.2-1: Evaluation period $T_{Evaluate_CBD_CSI\text{-}RS}$ for FR1

Configuration	$T_{EvaluateC_CBD_CSI\text{-}RS}$ (ms)
non-DRX, DRX cycle ≤ 320ms	$\text{Max}(25, \text{Ceil}(M_{CBD} \times P \times P_{CBD}) \times T_{CSI\text{-}RS})$
DRX cycle > 320ms	$\text{Ceil}(M_{CBD} \times P \times P_{CBD}) \times T_{DRX}$
Note: $T_{CSI\text{-}RS}$ is the periodicity of CSI-RS resource in the set $\bar{q}_1$. T_{DRX} is the DRX cycle length.	

8.5C.6.3 Measurement restriction for CSI-RS based candidate beam detection

For both FR1, when the CSI-RS for CBD measurement is in the same OFDM symbol as SSB for RLM, BFD, CBD or L1-RSRP measurement, UE is not required to receive CSI-RS for CBD measurement in the PRBs that overlap with an SSB.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has same SCS than CSI-RS for CBD measurement, the UE shall be able to perform CSI-RS based CBD measurement without restrictions.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has different SCS than CSI-RS for CBD measurement, the UE shall be able to perform CSI-RS based CBD measurement with restrictions according to its capabilities:

- If the UE supports *simultaneousRxDataSSB-DiffNumerology* the UE shall be able to perform CSI-RS based CBD measurement for without restrictions.
- If the UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both CSI-RS for CBD measurement and SSB. Longer measurement period for CSI-RS based CBD measurement is expected, and no requirements are defined.

For FR1, when the CSI-RS for CBD measurement is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement, UE shall be able to measure the CSI-RS for CBD measurement without any restriction.

8.5C.7 Scheduling availability of UE during beam failure detection

Scheduling availability restrictions when the UE is performing beam failure detection are described in the following clauses.

8.5C.7.1 Scheduling availability of UE performing beam failure detection with a same subcarrier spacing as PDSCH/PDCCH on FR1

There are no scheduling restrictions due to beam failure detection performed on SSB and CSI-RS configured for BFD with the same SCS as PDSCH or PDCCH in FR1.

8.5C.7.2 Scheduling availability of UE performing beam failure detection with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UEs which support *simultaneousRxDataSSB-DiffNumerology* [14] there are no restrictions on scheduling availability due to beam failure detection when SSB is configured as BFD. For UEs which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to beam failure detection when SSB is configured as BFD.

- The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH or CSI-RS for tracking or CSI-RS for CQI on SSB symbols to be measured for beam failure detection.

8.5C.8 Scheduling availability of UE during candidate beam detection

Scheduling availability restrictions when the UE is performing L1-RSRP measurement for candidate beam detection are described in the following clauses.

8.5C.8.1 Scheduling availability of UE performing L1-RSRP measurement with a same subcarrier spacing as PDSCH/PDCCH on FR1

There are no scheduling restrictions due to L1-RSRP measurement performed on SSB and CSI-RS configured as link recovery detection resource with the same SCS as PDSCH or PDCCH in FR1.

8.5C.8.2 Scheduling availability of UE performing L1-RSRP measurement with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UEs which support *simultaneousRxDataSSB-DiffNumerology* [14] there are no restrictions on scheduling availability due to L1-RSRP measurement based on SSB as link recovery detection resource. For UEs which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to L1-RSRP measurement based on SSB configured as link recovery detection resource.

- The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH, TRS, CSI-RS for tracking or CSI-RS for CQI on SSB symbols to be measured for L1-RSRP.

8.5C.9 Minimum requirement at transitions for beam failure detection

When the UE transitions between DRX and no DRX or when DRX cycle periodicity changes, for each BFD-RS resource, for a duration of time equal to the evaluation period corresponding to the second mode after the transition occurs, the UE shall use an evaluation period that is no less than the minimum of evaluation period corresponding to the first mode and the second mode. Subsequent to this duration, the UE shall use an evaluation period corresponding to the second mode for each BFD-RS resource.

When the UE transitions from a first configuration of BFD resources to a second configuration of BFD resources that is different from the first configuration, for each BFD resource present in the second configuration, for a duration of time equal to the evaluation period corresponding to the second configuration after the transition occurs, the UE shall use an evaluation period that is no less than the minimum of evaluation periods corresponding to the first configuration and the second configuration. Subsequent to this duration, the UE shall use an evaluation period corresponding to the second configuration for each BFD resource present in the second configuration.

When the UE transitions from a first configuration of active TCI state of the CORESET to a second configuration of active TCI state of the CORESET, for each CSI-RS for BFD present in the second configuration, the UE shall use an evaluation period corresponding to the second configuration from the time of transition.

8.6 Active BWP switch delay

8.6.1 Introduction

The requirements in this clause apply for a UE configured PCell or any activated SCell in standalone NR or NE-DC, PCell, PSCell or any activated SCell in MCG or SCG in NR-DC, or PSCell or any activated SCell in SCG in EN-DC. The requirements in this clause also apply for a UE configured with more than one BWP on PCell or any activated SCell with CCA in standalone NR, or PSCell or any activated SCell with CCA in SCG in EN-DC. The requirements in 8.6.4 apply for a UE which is capable of *ul-LBT-FailureDetectionRecovery-r16* configured with more than one UL BWP on PCell with CCA in standalone NR or PSCell with CCA in EN-DC.

UE shall complete the switch of active DL and/or UL BWP within the delay defined in this clause.

8.6.2 DCI and timer based BWP switch delay on a single CC

The requirements in this clause only apply to the case that the BWP switch is performed on a single CC with more than one BWP configurations configured.

For DCI-based BWP switch, after the UE receives BWP switching request at DL slot n on a serving cell, UE shall be able to receive PDSCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWP on the serving cell on which BWP switch on the first DL or UL slot occurs right after a time duration of $T_{BWPswitchDelay}$ + Y which starts from the beginning of DL slot n. Where,

- Y=0, if the serving cell where UE receives DCI for BWP switch request is same as the serving cell on which BWP switch occurs.
- Y equals to the length of 1 slot, if the serving cell where UE receives DCI for BWP switch is different from the serving cell on which BWP switch occurs for any involved serving cell. In this scenario, $T_{BWPswitchDelay}$ + Y shall follow the smaller SCS of scheduling cell, scheduled cells before and scheduled cells after active BWP change. If both scheduling cell and scheduled cell are in FR2-2, Y shall follow the SCS of 120 KHz.

The UE is not required to transmit UL signals or receive DL signals until the first DL or UL slot occurs right after a time duration of $T_{BWPswitchDelay}$ which starts from the beginning of DL slot n except DCI triggering BWP switch on the cell where DCI-based BWP switch occurs. The UE is not required to follow the requirements defined in this clause when performing a DCI-based BWP switch between the BWPs in disjoint channel bandwidths or in partially overlapping channel bandwidths.

For timer-based BWP switch, the UE shall start BWP switch at DL slot n, where slot n is the first slot of a DL subframe (FR1) or DL half-subframe (FR2) immediately after a BWP-inactivity timer *bwp-InactivityTimer* [2] expires on a serving cell, and the UE shall be able to receive PDSCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWP on the serving cell on which BWP switch on the first DL or UL slot occurs right after a time duration of $T_{BWPswitchDelay}$ which starts from the beginning of DL slot n.

The UE is not required to transmit UL signals or receive DL signals during time duration $T_{BWPswitchDelay}$ after *bwp-InactivityTimer* [2] expires on the cell where timer-based BWP switch occurs.

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 8.6.2-1.

Table 8.6.2-1: BWP switch delay

μ	NR Slot length (ms)	BWP switch delay $T_{BWPswitchDelay}$ (slots)	
		Type 1[Note 1]	Type 2[Note 1]
0	1	1	3
1	0.5	2	5

2	0.25	3	9
3	0.125	6	18
5	0.03125	20	65
6	0.015625	39	129
Note 1: Depends on UE capability. Note 2: If the BWP switch involves changing of SCS, the BWP switch delay is determined by the smaller SCS between the SCS before BWP switch and the SCS after BWP switch.			

Provided the UE does not have the required TCI-state information to receive PDCCH and PDSCH in the new BWP, the UE shall use old TCI-states before the BWP switch until a new MAC CE updating the required TCI-state information for PDCCH and PDSCH is received after the BWP switch.

If UE has the information on the required TCI-state information to receive PDCCH and PDSCH in the new BWP,

- UE shall be able to receive PDCCH and PDSCH with old TCI-states before the delay as specified in Clause 8.10 in the new BWP.

- UE shall be able to receive PDCCH and PDSCH with new TCI-states after the delay as specified in Clause 8.10 in the new BWP.

Provided the UE does not have the required activated TCI-state(s) information to receive PDCCH/ PDSCH and to transmit PUSCH/PUCCH/SRS in the new BWP, the UE shall use old TCI-state(s) before the BWP switch until a new MAC CE updating the required activated TCI-state(s) information is received after the BWP switch.

If the BWP switch is triggered within or outside DRX active time, and one of the two BWPs in a BWP switching is a dormant BWP [TS 38.321, 7], UE shall be able to complete active BWP switching within the time duration of

- $T_{dormantBWPswitchDelay} = T_{BWPswitchDelay} + X$, provided that the dormancy indication is received in any of the first 3 OFDM symbols of a slot in the serving cell where DCI for dormancy indication is receiveds, or

- $T_{dormantBWPswitchDelay} = T_{BWPswitchDelay} + X + Z$, provided that the dormancy indication is received after the first 3 OFDM symbols of a slot in the serving cell where DCI for dormancy indication is received, where

- $T_{BWPswitchDelay}$ is defined in Table 8.6.2-1 corresponding to the smallest value among the SCS of the serving cell where UE receives dormancy indication and the SCSs of the dormant BWP and the active BWP immediately before or after switching the BWP of the serving cell where BWP switching occurs;

- X equals to the length of 1 slot corresponding to the smallest value among the SCS of the serving cell where UE receives dormancy indication and the SCSs of the dormant BWP and the active BWP immediately before or after switching the BWP of the serving cell where BWP switching occurs. If both scheduling cell and scheduled cell are in FR2-2, X shall follow the SCS of 120 KHz.

- Z equals to the length of 1 slot corresponding to the SCS of the serving cell where UE receives dormancy indication.

For DCI-based BWP switch, if the new BWP is a dormant BWP, after the UE receives BWP switching request at DL slot n on a serving cell, UE shall be able to receive CSI-RS (for DL active BWP switch) on the new BWP on the serving cell on which BWP switch on the first DL slot occurs right after a time duration of $T_{dormantBWPswitchDelay}$ which starts from the beginning of DL slot n.

8.6.2A DCI based BWP switch delay on multiple CCs

The requirements in this clause only apply to the case when the same type of BWP switch (DCI based BWP switch) is performed on multiple CCs simultaneously or over partially overlapping time period.

8.6.2A.1 Simultaneous DCI based BWP switch delay on multiple CCs

The delay requirements for simultaneous DCI based BWP switch on multiple CCs in this clause apply only if the timing difference among the first symbol of slot carrying DCI for all CCs is received within the MRTD for inter-band CA as defined in clause 7.6.4.

For DCI-based BWP switch on multiple CCs, after the UE receives BWP switching request, UE shall be able to receive PDSCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWPs on the serving cells on which BWP switch on the first DL or UL slot occurs right after a time duration of $T_{MultipleBWPswitchDelay}$ which starts from the beginning of DL slot n, where slot n is slot which UE receives the earliest BWP switching request among CCs on which UE is performing simultaneous DCI-based BWP switching.

The UE is not required to transmit UL signals or receive DL signals until the first DL or UL slot occurs right after a time duration of $T_{MultipleBWPswitchDelay}$ which starts from the beginning of DL slot n except DCI triggering BWP switch on the cell where DCI-based BWP switch occurs. The UE is not required to follow the requirements defined in this clause when performing a DCI-based BWP switch between the BWPs in disjoint channel bandwidths or in partially overlapping channel bandwidths on any serving cell.

UE shall finish BWP switch within the time duration $T_{MultipleBWPswitchDelay} + Y$, which is defined as:

$$T_{MultipleBWPswitchDelay} = T_{BWPswitchDelay} + D*(N-1)$$

Where:

- $T_{BWPswitchDelay}$ is the BWP switching delay on single CC defined in Table 8.6.2-1 depending on UE capability *bwp-SwitchingDelay* [2]. $T_{BWPswitchDelay}$ shall be based on the smallest SCS among SCS of all involved CCs before and after BWP switch. If the BWP switch on multiple CCs results in the change of the SCS on any CC among involved CCs, $T_{BWPswitchDelay}$ should be based on the smallest SCS among all SCS values of all involved CCs.

- D is the incremental delay for each additional CC involved in simultaneous BWP switch and depends on UE capability *bwp-SwitchingMultiCCs-r16* [TS 38.306, 14] for switching between non-dormant BWPs, and *bwp-SwitchingMultiDormancyCCs-r16* for switching between non-dormant and dormant BWPs.

- For UE which is capable of per-FR gap, and no BWP switch involves SCS change, N is the number of CCs in same FR; For UE which is not capable of per-FR gap, or the BWP switches on any CC involves SCS changing, N is the number of CCs undergoing simultaneous BWP switch.

- Y=0, if the serving cell where UE receives DCI for BWP switch is same as the serving cell on which BWP switch occurs for each involved serving cell.

  Y equals to the length of one slot at smaller SCS of scheduling cell, scheduled cells before and scheduled cells after active BWP change,

- if the serving cell where UE receives DCI for BWP switch is different from the serving cell on which BWP switch occurs for any involved serving cell. If both scheduling cell and scheduled cell are in FR2-2, Y shall follow the SCS of 120 KHz.

Provided the UE does not have the required TCI-state information to receive PDCCH and PDSCH in the new BWP, the UE shall use old TCI-states before the BWP switch until a new MAC CE updating the required TCI-state information for PDCCH and PDSCH is received after the BWP switch.

If UE has the information on the required TCI-state information to receive PDCCH and PDSCH in the new BWP,

- UE shall be able to receive PDCCH and PDSCH with old TCI-states before the delay as specified in Clause 8.10 in the new BWP.

- UE shall be able to receive PDCCH and PDSCH with new TCI-states after the delay as specified in Clause 8.10 in the new BWP.

Provided the UE does not have the required activated TCI-state(s) information to receive PDCCH/ PDSCH and to transmit PUSCH/PUCCH/SRS in the new BWP, the UE shall use old TCI-state(s) before the BWP switch until a new MAC CE updating the required activated TCI-state(s) information is received after the BWP switch.

If the BWP switch is triggered on multiple CCs simultaneously within or outside DRX active time, and one of the two BWPs on each CC in a BWP switching is a dormant BWP [TS 38.321, 7], UE shall be able to complete active BWP switching within the time duration of

- $T_{DormantMultipleBWPswitchDelay} = T_{MultipleBWPswitchDelay}+X$, provided that the dormancy indication is received in any of the first 3 OFDM symbols of a slot in the serving cell where DCI for dormancy indication is received, or

- $T_{DormantMultipleBWPswitchDelay} = T_{MultipleBWPswitchDelay} + X + Z$, provided that the dormancy indication is received after the first 3 OFDM symbols of a slot in the serving cell where DCI for dormancy indication is received, where

- $T_{MultipleBWPswitchDelay}$ is defined above corresponding to the smallest value among the SCS of the serving cell where UE receives dormancy indication and the SCSs of the dormant BWP and the active BWP immediately before or after switching the BWP of the serving cell where BWP switching occurs;

- X equals to the length of 1 slot corresponding to the smallest value among the SCS of the serving cell where UE receives dormancy indication and the SCSs of the dormant BWP and the active BWP immediately before or after switching the BWP of the serving cell where BWP switching occurs. If both scheduling cell and scheduled cell are in FR2-2, X shall follow the SCS of 120 KHz.

- Z equals to the length of 1 slot corresponding to the SCS of the serving cell where DCI for dormancy indication is received.

The number of CCs, N, on which the UE can simultaneously switch BWPs while still meeting the requirements, if any, related to allocations on downlink, uplink, or transmission of HARQ-ACK, depends on the UE reported capabilities related to BWP switching, the network configuration and the BWP switch method.

8.6.2A.2 Non-simultaneous DCI based BWP switch delay on multiple CCs

In non-simultaneous case, the DCI-based BWP switch on multiple CCs is triggered over partially overlapping time period between CCs or multiple CCs in different Cell groups. The delay requirements for non-simultaneous DCI based BWP switch on multiple CCs in this clause apply only if:

- the timing difference among the first symbol of slot carrying DCI for all CCs involved in non-simultaneous BWP switch is received exceeds the MRTD for inter-band CA as defined in clause 7.6.4, and

- UE is operating in NR-DC (FR1+FR2), and

- UE is capable of per-FR gap, and

- BWP switch does not involve SCS change

For non-simultaneous DCI based BWP switch on multiple CCs, BWP switching delay requirements defined in clause 8.6.2 apply when BWP switching occurs on single CC in the cell group. BWP switching delay requirements defined in clause 8.6.2A.1 apply when simultaneous BWP switching occurs on multiple CCs in the cell group.

8.6.2B Timer based BWP switch delay on multiple CCs

The requirements in this clause only apply to the case when the same type of BWP switch (timer based BWP switch) is performed on multiple CCs simultaneously or over partially overlapping time period.

8.6.2B.1 Simultaneous timer based BWP switch delay on multiple CCs

The delay requirements for simultaneous timer based BWP switch on multiple CCs in this clause apply only if the timing difference among the beginning of the slot where timer based BWP switching starts for all CCs is within the MRTD for inter-band CA as defined in clause 7.6.4.

For timer-based BWP switch on multiple CCs, UE shall start BWP switch at DL slot n, where slot n is the first slot of a DL subframe (in FR1) or DL half-subframe ((in FR2) immediately after the earliest BWP-inactivity timer *bwp-InactivityTimer* [2] expiration occurs on multiple serving cells, and the UE shall be able to receive PDSCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWPs on the serving cells on which BWP switch on the first DL or UL slot occurs right after a time duration of $T_{MultipleBWPswitchDelay}$ which starts from the beginning of DL slot n, where $T_{MultipleBWPswitchDelay}$ is defined in 8.6.2A.1.

The UE is not required to transmit UL signals or receive DL signals during time duration $T_{MultipleBWPswitchDelay}$ after *bwp-InactivityTimer* [2] expires on the cell where timer-based BWP switch occurs.

Provided the UE does not have the required TCI-state information to receive PDCCH and PDSCH in the new BWP, the UE shall use old TCI-states before the BWP switch until a new MAC CE updating the required TCI-state information for PDCCH and PDSCH is received after the BWP switch.

If UE has the information on the required TCI-state information to receive PDCCH and PDSCH in the new BWP,

- UE shall be able to receive PDCCH and PDSCH with old TCI-states before the delay as specified in Clause 8.10 in the new BWP.

- UE shall be able to receive PDCCH and PDSCH with new TCI-states after the delay as specified in Clause 8.10 in the new BWP.

Provided the UE does not have the required activated TCI-state(s) information to receive PDCCH/ PDSCH and to transmit PUSCH/PUCCH/SRS in the new BWP, the UE shall use old TCI-state(s) before the BWP switch until a new MAC CE updating the required activated TCI-state(s) information is received after the BWP switch.

8.6.2B.2 Non-simultaneous timer based BWP switch delay on multiple CCs

In non-simultaneous case, the timer-based BWP switch on multiple CCs is triggered over partially overlapping time period.

The delay requirements for non-simultaneous timer based BWP switch on multiple CCs in this clause apply if the timing difference among the beginning of the slot where timer based BWP switching starts for all CCs is exceeds the MRTD for inter-band CA as defined in clause 7.6.4, and the BWP switch does not involve SCS change. The UE performs the non-simultaneous timer-based BWP switch on the CCs sequentially.

For non-simultaneous timer-based BWP switch, the UE shall be able to receive PDSCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWP on the serving cell on which BWP switch on the first DL or UL slot occurs right after a time duration of $T_{MultipleBWPswitchDelayTotal}$ which starts from the beginning of DL slot n, where slot n is the first slot of a DL subframe (in FR1) or DL half-subframe (in FR2) immediately after the earliest BWP-inactivity timer *bwp-InactivityTimer* [2] expires.

$$T_{MultipleBWPswitchDelayTotal} = T_{Delay} + T_{MultipleBWPswitchDelay}$$

Where:

T_{Delay} is the time required to complete the ongoing timer-based BWP switching on other CCs.

$T_{MultipleBWPswitchDelay}$ is the timer-based BWP switch delay on current single CC defined in clause 8.6.2 or simultaneously triggered on multiple CCs defined in clause 8.6.2B.1.

The UE is not required to transmit UL signals or receive DL signals during time duration $T_{MultipleBWPswitchDelayTotal}$ after *bwp-InactivityTimer* [2] expires on the cell where timer-based BWP switch occurs.

Provided the UE does not have the required TCI-state information to receive PDCCH and PDSCH in the new BWP, the UE shall use old TCI-states before the BWP switch until a new MAC CE updating the required TCI-state information for PDCCH and PDSCH is received after the BWP switch.

If UE has the information on the required TCI-state information to receive PDCCH and PDSCH in the new BWP,

- UE shall be able to receive PDCCH and PDSCH with old TCI-states before the delay as specified in Clause 8.10 in the new BWP.

- UE shall be able to receive PDCCH and PDSCH with new TCI-states after the delay as specified in Clause 8.10 in the new BWP.

Provided the UE does not have the required activated TCI-state(s) information to receive PDCCH/ PDSCH and to transmit PUSCH/PUCCH/SRS in the new BWP, the UE shall use old TCI-state(s) before the BWP switch until a new MAC CE updating the required activated TCI-state(s) information is received after the BWP switch.

8.6.3 RRC based BWP switch delay on a single CC

The requirements in this clause only apply to the case that the BWP switch is performed on a single CC with one or more than one BWP configuration(s) configured, with

- Active BWP switch or parameter change of its active BWPs for SpCell
- Parameter change of its active BWPs except parameter *firstActiveDownlinkBWP-Id* and *firstActiveUplinkBWP-Id* for SCell

For RRC-based BWP switch, after the UE receives RRC reconfiguration involving active BWP switching or parameter change of its active BWP, UE shall be able to receive PDSCH/PDCCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWP on the serving cell on which BWP switch occurs on the first DL or UL slot right after a time duration of $\frac{T_{RRCprocessingDelay}+T_{BWPswitchDelayRRC}}{NR\ Slot\ length}$ slots which begins from the beginning of DL slot n, where

DL slot n is the last slot overlapping with the PDSCH containing the RRC command, and

$NR\ Slot\ length$ is determined by the smaller SCS between the SCS before BWP switch and the SCS after BWP switch if the BWP switch involves changing of SCS.

$T_{RRCprocessingDelay}$ is the length of the RRC procedure delay in ms as defined in clause 11.2 in TS 36.331 [16] if the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the length of the RRC procedure delay in ms as defined in clause 12 in TS 38.331 [2], and

$T_{BWPswitchDelayRRC} = 6ms$ is the time used by the UE to perform BWP switch.

The UE is not required to transmit UL signals or receive DL signals during the time defined by $T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}$ on the cell where RRC-based BWP switch occurs. When $T_{HARQ} > T_{RRCprocessingDelay}$ a longer switching delay is allowed. Where T_{HARQ} is the time between DL data transmission and acknowledgement as specified in TS 38.213 [3].

8.6.3A RRC based BWP switch delay on multiple CCs

The requirements in this clause only apply to the case when the same type of BWP switch (RRC based BWP switch) is performed on multiple CCs simultaneously or over partially overlapping time period.

The requirements in this clause shall apply:

- Active BWP switching or parameter change of its active BWPs for SpCell
- Parameter change of its active BWPs except parameter *firstActiveDownlinkBWP-Id* and *firstActiveUplinkBWP-Id* for SCells

8.6.3A.1 Simultaneous RRC based BWP switch delay on multiple CCs

Requirements in this clause apply only if RRC based BWP switching on multiple CCs for NR-CA is triggered by a single RRC command.

For RRC-based BWP switch, after the UE receives RRC reconfiguration involving active BWP switching or parameter change of its active BWPs, UE shall be able to receive PDSCH/PDCCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWPs on the serving cells on which BWP switch occurs on the first DL or UL slot right after a time duration of $\frac{T_{RRCprocessingDelay}+T_{BWPswitchDelayRRC}+D_{RRC}*(N-1)}{NR\ slot\ length}$ slots which begins from the beginning of DL slot n, where

DL slot n is the last slot overlapping with the PDSCH containing the RRC command, and

$T_{RRCprocessingDelay}$ and $T_{BWPswitchDelayRRC}$ are defined in clause 8.6.3, and

$D_{RRC} = 0$ for UE which is capable of type 1 BWP switching delay depending on UE capability *bwp-SwitchingDelay* [2]. $D_{RRC} = D$ for UE which is capable of type 2 BWP switching delay depending on UE capability *bwp-SwitchingDelay* [2], where D is the incremental delay for each additional CC involved in simultaneous BWP switch and depends on UE capability [TS 38.306, 14].

N is the number of CCs within the NR-CA configured for performing simultaneous BWP switch.

The UE is not required to transmit UL signals or receive DL signals during the time defined by $T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC} + D_{RRC} * (N - 1)$ on the cells where RRC-based BWP switch occurs.

8.6.3A.2 Non-simultaneous RRC based BWP switch delay on multiple CCs

In non-simultaneous case, the RRC-based BWP switch on multiple CCs is triggered over partially overlapping time period in different Cell groups. The delay requirements in this clause apply only if:

BWP switching on multiple CCs in different cell groups are triggered by separate RRC commands, and

UE is operating in NR-DC (FR1+FR2), and

UE is capable of per-FR gap, and

BWP switch does not involve SCS change.

For non-simultaneous RRC-based BWP switch, after the UE receives RRC reconfiguration involving active BWP switching or parameter change of its active BWPs, UE shall be able to receive PDSCH/PDCCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWPs on the serving cells on which BWP switch occurs on the first DL or UL slot right after a time duration of $\frac{T_{Waiting}+T_{RRCprocessingDelay}+T_{BWPswitchDelayRRC}+D_{RRC}*(M-1)}{NR\ slot\ length}$ slots which begins from the beginning of DL slot n, where

DL slot n is the last slot containing the RRC command,

$T_{Waiting}$ is the waiting time for RRC based BWP switch which is upper bounded by the ongoing BWP switch time in the first CG defined in clause 8.6.3A.1,

M is the number of CCs within the NR-CA configured for performing simultaneous BWP switch in the second CG; M=1 if the BWP switch is performed on single CC,

$T_{RRCprocessingDelay}$ and $T_{BWPswitchDelayRRC}$ are defined in clause 8.6.3, and

D_{RRC} is defined in clause 8.6.3A.1.

The UE is not required to transmit UL signals or receive DL signals during the time defined by $T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC} + D_{RRC} * (M - 1)$ on the cells in the second CG where RRC-based BWP switch occurs.

8.6.4 BWP switch delay on Consistent UL CCA recovery

Upon detection of consistent UL CCA failure is slot#n in SpCell when UE detects *lbt-FailureInstanceMaxCount* number of CCA failure within *lbt-FailureDetectionTimer*, the UE shall switch the active UL BWP to an UL BWP configured with PRACH occasion and for which consistent CCA failure has not been triggered as defined in TS 38.321 clause 5.21 [7]. The UE shall be ready to transmit PRACH on the new UL BWP of the SpCell on the first UL slot occurs right after slot n+$T_{BWPswitchDelay}$ +1, where $T_{BWPswitchDelay}$ is defined in Table 8.6.2-1. The UE shall finish the UL BWP switch within the time duration $T_{BWPswitchDelay}$ depending on UE capability *bwp-SwitchingDelay* [2].

Note: Additional delay in acquiring the first available RACH occasion will be derived in a way similar to that in handover in clause 6.1B.1.

The UE is not required to transmit UL signals or receive DL signals during time duration $T_{BWPswitchDelay}$ on the SpCell in the UL BWP switch. The UE is not required to follow the requirements defined in this clause when performing a UL BWP switch between the UL BWPs in disjoint channel bandwidths or in partially overlapping channel bandwidths.

8.6A Active BWP switch delay for RedCap

8.6A.1 Introduction

The requirements in this clause apply for RedCap UE. UE shall complete the switch of active DL and/or UL BWP within the delay defined in this clause.

8.6A.2 DCI and timer based BWP switch delay on a single CC

The requirements in this clause only apply to the case that the BWP switch is performed on a single CC with more than one BWP configurations configured.

For DCI-based BWP switch, after the UE receives BWP switching request at DL slot n on a serving cell, UE shall be able to receive PDSCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWP on the serving cell on which BWP switch on the first DL or UL slot occurs right after a time duration of $T_{BWPswitchDelay}$ + Y which starts from the beginning of DL slot n. Where,

- Y=0, if the serving cell where UE receives DCI for BWP switch request is same as the serving cell on which BWP switch occurs.

- Y equals to the length of 1 slot, if the serving cell where UE receives DCI for BWP switch is different from the serving cell on which BWP switch occurs for any involved serving cell. In this scenario, $T_{BWPswitchDelay}$ + Y shall follow the smaller SCS of scheduling cell, scheduled cells before and scheduled cells after active BWP change.

The UE is not required to transmit UL signals or receive DL signals until the first DL or UL slot occurs right after a time duration of $T_{BWPswitchDelay}$ which starts from the beginning of DL slot n except DCI triggering BWP switch on the cell where DCI-based BWP switch occurs. The UE is not required to follow the requirements defined in this clause when performing a DCI-based BWP switch between the BWPs in disjoint channel bandwidths or in partially overlapping channel bandwidths.

For timer-based BWP switch, the UE shall start BWP switch at DL slot n, where slot n is the first slot of a DL subframe (FR1) or DL half-subframe (FR2) immediately after a BWP-inactivity timer *bwp-InactivityTimer* [2] expires on a serving cell, and the UE shall be able to receive PDSCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWP on the serving cell on which BWP switch on the first DL or UL slot occurs right after a time duration of $T_{BWPswitchDelay}$ which starts from the beginning of DL slot n.

The UE is not required to transmit UL signals or receive DL signals during time duration $T_{BWPswitchDelay}$ after *bwp-InactivityTimer* [2] expires on the cell where timer-based BWP switch occurs.

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 8.6.2-1.

Table 8.6A.2-1: BWP switch delay

μ	NR Slot length (ms)	BWP switch delay $T_{BWPswitchDelay}$ (slots)	
		Type 1[Note 1]	Type 2[Note 1]
0	1	1	3
1	0.5	2	5
2	0.25	3	9
3	0.125	6	18
Note 1: Depends on UE capability. Note 2: If the BWP switch involves changing of SCS, the BWP switch delay is determined by the smaller SCS between the SCS before BWP switch and the SCS after BWP switch.			

Provided the UE does not have the required TCI-state information to receive PDCCH and PDSCH in the new BWP, the UE shall use old TCI-states before the BWP switch until a new MAC CE updating the required TCI-state information for PDCCH and PDSCH is received after the BWP switch.

If UE has the information on the required TCI-state information to receive PDCCH and PDSCH in the new BWP,

- UE shall be able to receive PDCCH and PDSCH with old TCI-states before the delay as specified in Clause 8.10 in the new BWP.

- UE shall be able to receive PDCCH and PDSCH with new TCI-states after the delay as specified in Clause 8.10 in the new BWP.

If the BWP switch is triggered within or outside DRX active time, and one of the two BWPs in a BWP switching is a dormant BWP [TS 38.321, 7], UE shall be able to complete active BWP switching within the time duration of

- $T_{dormantBWPswitchDelay} = T_{BWPswitchDelay} + X$, provided that the dormancy indication is received in any of the first 3 OFDM symbols of a slot in the serving cell where DCI for dormancy indication is receiveds, or

- $T_{dormantBWPswitchDelay} = T_{BWPswitchDelay} + X + Z$, provided that the dormancy indication is received after the first 3 OFDM symbols of a slot in the serving cell where DCI for dormancy indication is received, where

- $T_{BWPswitchDelay}$ is defined in Table 8.6.2-1 corresponding to the smallest value among the SCS of the serving cell where UE receives dormancy indication and the SCSs of the dormant BWP and the active BWP immediately before or after switching the BWP of the serving cell where BWP switching occurs;

- X equals to the length of 1 slot corresponding to the smallest value among the SCS of the serving cell where UE receives dormancy indication and the SCSs of the dormant BWP and the active BWP immediately before or after switching the BWP of the serving cell where BWP switching occurs.

- Z equals to the length of 1 slot corresponding to the SCS of the serving cell where UE receives dormancy indication.

For DCI-based BWP switch, if the new BWP is a dormant BWP, after the UE receives BWP switching request at DL slot n on a serving cell, UE shall be able to receive CSI-RS (for DL active BWP switch) on the new BWP on the serving cell on which BWP switch on the first DL slot occurs right after a time duration of $T_{dormantBWPswitchDelay}$ which starts from the beginning of DL slot n.

8.6A.3 RRC based BWP switch delay on a single CC

The requirements in this clause only apply to the case that the BWP switch is performed on a single CC with one or more than one BWP configuration(s) configured, with

Active BWP switch or parameter change of its active BWPs for PCell

Parameter change of its active BWPs except parameter *firstActiveDownlinkBWP-Id* and *firstActiveUplinkBWP-Id* for SCell

For RRC-based BWP switch, after the UE receives RRC reconfiguration involving active BWP switching or parameter change of its active BWP, UE shall be able to receive PDSCH/PDCCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWP on the serving cell on which BWP switch occurs on the first DL or UL slot right after a time duration of $\frac{T_{RRCprocessing\,Delay}+T_{BWPswitchDelayRRC}}{NR\ Slot\ length}$ slots which begins from the beginning of DL slot n, where

DL slot n is the last slot overlapping with the PDSCH containing the RRC command, and

$NR\ Slot\ length$ is determined by the smaller SCS between the SCS before BWP switch and the SCS after BWP switch if the BWP switch involves changing of SCS.

$T_{RRCprocessing\,Delay}$ is the length of the RRC procedure delay in ms as defined in clause 11.2 in TS 36.331 [16] if the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the length of the RRC procedure delay in ms as defined in clause 12 in TS 38.331 [2], and

$T_{BWPswitchDelayRRC} = 6ms$ is the time used by the UE to perform BWP switch.

The UE is not required to transmit UL signals or receive DL signals during the time defined by $T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}$ on the cell where RRC-based BWP switch occurs. When $T_{HARQ} > T_{RRCprocessingDelay}$ a longer switching delay is allowed. Where T_{HARQ} is the time between DL data transmission and acknowledgement as specified in TS 38.213 [3].

8.6C Active BWP switch delay for satellite access

Editor's note: Applicability of frequency range, CA, DA, duplex mode, inter-RAT measurement, etc is subject to updates/changes based on the scope of the corresponding WID.

Editor's note: Terminology will be further clarified and selected between, e.g. NTN and satellite access, based on further agreements.

8.6C.1 Introduction

The requirements in this clause apply for a UE configured with only PCell, which is served by satellite access node (SAN). The requirements in this clause also apply for a UE configured with more than one BWP on PCell.

UE shall complete the switch of active DL and/or UL BWP within the delay defined in this clause.

8.6C.2 DCI and timer based BWP switch delay on a single CC

The requirements in this clause only apply to the case that the BWP switch is performed on a single CC with more than one BWP configurations configured.

For DCI-based BWP switch, after the UE receives BWP switching request at DL slot n on a serving cell, UE shall be able to receive PDSCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWP on the serving cell on which BWP switch on the first DL or UL slot occurs right after a time duration of $T_{BWPswitchDelay}$ + Y which starts from the beginning of DL slot n. Where,

- Y=0, if the serving cell where UE receives DCI for BWP switch request is same as the serving cell on which BWP switch occurs.
- Y equals to the length of 1 slot, if the serving cell where UE receives DCI for BWP switch is different from the serving cell on which BWP switch occurs for any involved serving cell. In this scenario, $T_{BWPswitchDelay}$ + Y shall follow the smaller SCS of scheduling cell, scheduled cells before and scheduled cells after active BWP change.

The UE is not required to transmit UL signals or receive DL signals until the first DL or UL slot occurs right after a time duration of $T_{BWPswitchDelay}$ which starts from the beginning of DL slot n except DCI triggering BWP switch on the cell where DCI-based BWP switch occurs. The UE is not required to follow the requirements defined in this clause when performing a DCI-based BWP switch between the BWPs in disjoint channel bandwidths or in partially overlapping channel bandwidths.

For timer-based BWP switch, the UE shall start BWP switch at DL slot n, where slot n is the first slot of a DL subframe (FR1) immediately after a BWP-inactivity timer *bwp-InactivityTimer* [2] expires on a serving cell, and the UE shall be able to receive PDSCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWP on the serving cell on which BWP switch on the first DL or UL slot occurs right after a time duration of $T_{BWPswitchDelay}$ which starts from the beginning of DL slot n.

The UE is not required to transmit UL signals or receive DL signals during time duration $T_{BWPswitchDelay}$ after *bwp-InactivityTimer* [2] expires on the cell where timer-based BWP switch occurs.

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 8.6C.2-1.

Table 8.6C.2-1: BWP switch delay

μ	NR Slot length (ms)	BWP switch delay $T_{BWPswitchDelay}$ (slots)	
		Type 1[Note 1]	Type 2[Note 1]
0	1	1	3
1	0.5	2	5
2	0.25	3	9
Note 1: Depends on UE capability. Note 2: If the BWP switch involves changing of SCS, the BWP switch delay is determined by the smaller SCS between the SCS before BWP switch and the SCS after BWP switch.			

Provided the UE does not have the required TCI-state information to receive PDCCH and PDSCH in the new BWP, the UE shall use old TCI-states before the BWP switch until a new MAC CE updating the required TCI-state information for PDCCH and PDSCH is received after the BWP switch.

If UE has the information on the required TCI-state information to receive PDCCH and PDSCH in the new BWP,

- UE shall be able to receive PDCCH and PDSCH with old TCI-states before the delay as specified in Clause 8.10 in the new BWP.
- UE shall be able to receive PDCCH and PDSCH with new TCI-states after the delay as specified in Clause 8.10 in the new BWP.

If the BWP switch is triggered within or outside DRX active time, and one of the two BWPs in a BWP switching is a dormant BWP [TS 38.321, 7], UE shall be able to complete active BWP switching within the time duration of

- $T_{dormantBWPswitchDelay} = T_{BWPswitchDelay} + X$, provided that the dormancy indication is received in any of the first 3 OFDM symbols of a slot in the serving cell where DCI for dormancy indication is receiveds, or
- $T_{dormantBWPswitchDelay} = T_{BWPswitchDelay} + X + Z$, provided that the dormancy indication is received after the first 3 OFDM symbols of a slot in the serving cell where DCI for dormancy indication is received, where
- $T_{BWPswitchDelay}$ is defined in Table 8.6C.2-1 corresponding to the smallest value among the SCS of the serving cell where UE receives dormancy indication and the SCSs of the dormant BWP and the active BWP immediately before or after switching the BWP of the serving cell where BWP switching occurs.
- X equals to the length of 1 slot corresponding to the smallest value among the SCS of the serving cell where UE receives dormancy indication and the SCSs of the dormant BWP and the active BWP immediately before or after switching the BWP of the serving cell where BWP switching occurs.
- Z equals to the length of 1 slot corresponding to the SCS of the serving cell where UE receives dormancy indication.

For DCI-based BWP switch, if the new BWP is a dormant BWP, after the UE receives BWP switching request at DL slot n on a serving cell, UE shall be able to receive CSI-RS (for DL active BWP switch) on the new BWP on the serving cell on which BWP switch on the first DL slot occurs right after a time duration of $T_{dormantBWPswitchDelay}$ which starts from the beginning of DL slot n.

8.6C.3 RRC based BWP switch delay on a single CC

The requirements in this clause only apply to the case that the BWP switch is performed on a single CC with one or more than one BWP configuration(s) configured, with

- Active BWP switch or parameter change of its active BWPs for PCell

For RRC-based BWP switch, after the UE receives RRC reconfiguration involving active BWP switching or parameter change of its active BWP, UE shall be able to receive PDSCH/PDCCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWP on the serving cell on which BWP switch occurs on the first DL or UL slot right after a time duration of $\frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}}{NR\ Slot\ length}$ slots which begins from the beginning of DL slot n, where

DL slot n is the last slot containing the RRC command, and

$NR\ Slot\ length$ is determined by the smaller SCS between the SCS before BWP switch and the SCS after BWP switch if the BWP switch involves changing of SCS.

$T_{RRCprocessingDelay}$ is the length of the RRC procedure delay in ms as defined in clause 12 in TS 38.331 [2], and

$T_{BWPswitchDelayRRC} = 6ms$ is the time used by the UE to perform BWP switch.

The UE is not required to transmit UL signals or receive DL signals during the time defined by $T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}$ on the cell where RRC-based BWP switch occurs. When $T_{HARQ} > T_{RRCprocessingDelay}$ a longer

switching delay is allowed. Where T_{HARQ} is the time between DL data transmission and acknowledgement as specified in TS 38.213 [3].

8.7 Void

8.8 NE-DC: E-UTRAN PSCell Addition and Release Delay

8.8.1 Introduction

This clause defines requirements for the delay within which the UE shall be able to configure an E-UTRAN PSCell in NR - E-UTRA dual connectivity. The requirements are applicable to an NR - E-UTRA dual connectivity capable UE.

8.8.2 E-UTRAN PSCell Addition Delay Requirement

The requirements in this clause shall apply for the UE, which is configured with PCell, and may also be configured with one or more SCells.

Upon receiving E-UTRAN PSCell addition in subframe *n*, the UE shall be capable to transmit PRACH preamble towards E-UTRAN PSCell no later than in subframe $n + T_{config_EUTRAN\text{-}PSCell}$:

Where:

$T_{config_EUTRAN\text{-}PSCell} = T_{RRC_delay} + T_{activation_time} + 50ms + T_{E\text{-}UTRAN\text{-}PSCell_DU}$

T_{RRC_delay} is the RRC procedure delay as specified in TS 38.331 [2].

$T_{activation_time}$ is the E-UTRAN PSCell activation delay. If the E-UTRAN PSCell is known, then $T_{activation_time}$ is 20ms. If the E-UTRAN PSCell is unknown, then $T_{activation_time}$ is 30ms provided the E-UTRAN PSCell can be successfully detected on the first attempt.

$T_{E\text{-}UTRAN\text{-}PSCell_DU}$ is the delay uncertainty in acquiring the first available PRACH occasion in the E-UTRAN PSCell. $T_{E\text{-}UTRAN\text{-}PSCell_DU}$ is up to 30ms.

E-UTRAN PSCell is known if it has been meeting the following conditions:

- During the last 5 seconds before the reception of the E-UTRAN PSCell configuration command:
  - the UE has sent a valid measurement report for the E-UTRAN PSCell being configured and
  - the E-UTRAN PSCell being configured remains detectable according to the cell identification conditions specified in clause 8.8 of TS 36.133 [15],
- E-UTRAN PSCell being configured also remains detectable during the E-UTRAN PSCell configuration delay $T_{config_EUTRAN\text{-}PSCell}$ according to the cell identification conditions specified in clause 8.8 of TS 36.133 [15].

otherwise it is unknown.

The PCell interruption specified in clause 8.2 is allowed only during the RRC reconfiguration procedure [2].

8.8.3 E-UTRAN PSCell Release Delay Requirement

also be configured with one or more SCells and/or E-UTRAN SCells.

Upon receiving E-UTRAN PSCell release in subframe *n*, the UE shall accomplish the release actions specified in TS 38.331 [2] no later than in subframe $n+ T_{RRC_delay}$:

Where

T_{RRC_delay} is the RRC procedure delay as specified in TS 38.331 [2].

The PCell interruption specified in clause 8.2 is allowed only during the RRC reconfiguration procedure [2].

8.9 NR-DC: PSCell Addition and Release Delay

8.9.1 Introduction

This clause defines requirements for the delay within which the UE shall be able to configure an PSCell in NR dual connectivity. The requirements are applicable to an NR dual connectivity capable UE.

8.9.2 PSCell Addition Delay Requirement

The requirements in this clause shall apply for the UE configured with only PCell in FR1.

Upon receiving PSCell addition in subframe *n*, the UE shall be capable to transmit PRACH preamble towards PSCell in FR2 no later than in subframe $n + T_{config_PSCell}$ Upon receiving PSCell addition in subframe *n*, the UE shall be capable to transmit PRACH preamble towards PSCell in FR2 no later than in slot $n + \frac{T_{config_PSCell}}{NR\ slot\ length}$:

where:

$T_{config_PSCell} = T_{RRC_delay} + T_{processing} + T_{search} + T_{\Delta} + T_{PSCell_DU} + 2$ ms

T_{RRC_delay} is the RRC procedure delay as specified in TS 38.331 [2].

$T_{processing}$ is the SW processing time needed by UE, including RF warm up period. $T_{processing}$ = 40 ms.

T_{search} is the time for AGC settling and PSS/SSS detection. If the target cell is known, T_{search} = 0 ms. If the target cell is unknown and the target cell $\hat{E}s/Iot \geq$ -2dB, T_{search} = 3*N* Trs ms. N = 8 when the target cell is in FR2-1, and N = 12 when the target cell is in FR2-2

T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell. T_{Δ} = 1*Trs ms for a known or unknown PSCell.

T_{PSCell_DU} is the delay uncertainty in acquiring the first available PRACH occasion in the PSCell. T_{PSCell_DU} is up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in Table 8.1-1 of TS 38.213 [3].

Trs is the SMTC periodicity of the target cell if the UE has been provided with an SMTC configuration for the target cell in PSCell addition message, otherwise Trs is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with Trs = 5 ms assuming the SSB transmission periodicity is 5 ms. There is no requirement if the SSB transmission periodicity is not 5 ms.

In FR1 and FR2, the PSCell is known if it has been meeting the following conditions:

- During the last 5 seconds before the reception of the PSCell configuration command:
  - the UE has sent a valid measurement report for the PSCell being configured and
  - One of the SSBs measured from the PSCell being configured remains detectable according to the cell identification conditions specified in clause 9.3.
- One of the SSBs measured from PSCell being configured also remains detectable during the PSCell configuration delay T_{config_PSCell} according to the cell identification conditions specified in clause 9.3.

otherwise it is unknown.

The PCell interruption specified in clause 8.2 is allowed only during the RRC reconfiguration procedure [2].

8.9.3 PSCell Release Delay Requirement

The requirements in this clause shall apply for a UE which is configured with PCell and one PSCell.

Upon receiving PSCell release in subframe *n*, the UE shall accomplish the release actions specified in TS 38.331 [2] no later than in slot n + $\frac{T_{RRC_delay}}{NR\ slot\ length}$:

where

T_{RRC_delay} is the RRC procedure delay as specified in TS 38.331 [2].

The PCell interruption specified in clause 8.2 is allowed only during the RRC reconfiguration procedure [2].

8.9A Conditional PSCell Addition Delay

8.9A.1 Introduction

This clause defines requirements for the delay within which the UE shall be able to perform conditional PSCell addition in EN-DC or NR-DC. The requirements in this clause are applicable to EN-DC and NR-DC.

8.9A.2 Conditional PSCell Addition Delay Requirement

The requirements in this clause shall apply for the UE configured with only PCell in FR1.

Upon receiving conditional PSCell addition in subframe *n*, the UE shall be capable to transmit PRACH preamble towards PSCell no later than in subframe *n* + $T_{config_PSCell_Addition_Conditional}$:

Where:

$T_{config_PSCell_Addition_Conditional} = T_{RRC_delay} + T_{Event_DU} + T_{measure} + T_{UE_preparation} + T_{processing} + T_{\Delta} + T_{PSCell_DU} + 2$ ms

T_{RRC_delay} is the RRC processing delay defined in Clause 11.2 in 36.331 [16] which is the corresponding RRC message embedded in E-UTRA RRC message, otherwise it is the RRC procedure delay defined in clause 12 in TS 38.331 [2] for processing the conditional PSCell addition command.

T_{Event_DU} is the delay uncertainty which is the time from when the UE successfully decodes a conditional PSCell addition command until a condition exists at the measurement reference point which will trigger the conditional PSCell addition.

$T_{measure}$ is the measurements time stated in clause 8.9A.2.1.

$T_{UE_preparation}$ is the UE preparation time for conditional PSCell addition, and starts after UE realizes the condition of PSCell addition is met and identity of the PSCell is determined. $T_{UE_preparation}$ is up to 10 ms.

$T_{processing}$ is the SW processing time needed by UE, including RF warm up period. $T_{processing}$ = 20 ms when PSCell is in FR1, and $T_{processing}$ = 40 ms when PSCell is in FR2.

T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell. T_{Δ} = 1*Trs ms.

T_{PSCell_DU} is the delay uncertainty in acquiring the first available PRACH occasion in the PSCell. T_{PSCell_DU} is up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in Table 8.1-1 of TS 38.213 [3].

Trs is the SMTC periodicity of the target cell if the UE has been provided with an SMTC configuration for the target cell in PSCell addition message, otherwise Trs is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with Trs = 5 ms assuming the SSB transmission periodicity is 5 ms. There is no requirement if the SSB transmission periodicity is not 5 ms.

The PCell interruption specified in clause 8.2 is allowed only after the UE starts to execute a conditional PSCell addition.

8.9A.2.1 Measurement time

The measurement time delay is defined from the end of T_{Event_DU} until UE executes a PSCell addition and interruption time starts.

The measurement time delay measured without Time To Trigger (TTT) and L3 filtering shall be less than $T_{identify_inter_with_index}$ defined in clause 9.3.4. When TTT or L3 filtering is used an additional delay can be expected.

A cell is detectable only if at least one SSB measured from the cell being configured remains detectable during the time period $T_{identify_inter_with_index}$ for PSCell addition. If a cell, which has been detectable at least for the time period $T_{identify_inter_with_index}$ for PSCell addition, becomes undetectable for a period and then the cell becomes detectable again and triggers a PSCell addition, the measurement time delay shall be less than $T_{SSB_measurement_period_inter}$ provided the timing to that cell has not changed more than $\pm 3200/2^{\mu}$ Tc while the measurement gap has not been available and the L3 filter has not been used, where μ is the SCS configuration as defined in clause 4.2 of TS 38.211 [3]. When L3 filtering is used, an additional delay can be expected.

8.9B NR-DC: PSCell Addition and Release Delay in Carriers with CCA

8.9B.1 Introduction

This clause defines requirements for the delay within which the UE shall be able to configure an PSCell in FR2-2 with CCA in NR dual connectivity. The requirements are applicable to an NR dual connectivity capable UE.

8.9B.2 PSCell Addition Delay Requirement

The requirements in this clause shall apply for the UE configured with only PCell in FR1.

Upon receiving PSCell addition in subframe *n*, the UE shall be capable to transmit PRACH preamble towards PSCell in FR2-2 no later than in slot $n + \frac{T_{config_PSCell_CCA}}{NR\ slot\ length}$:

where:

$T_{config_PSCell_CCA} = T_{RRC_delay} + T_{processing} + T_{search_CCA} + T_{\Delta_CCA} + T_{PSCell_DU} + 2$ ms

T_{RRC_delay} is the RRC procedure delay as specified in TS 38.331 [2].

$T_{processing}$ is the SW processing time needed by UE, including RF warm up period. $T_{processing} = 40$ ms.

T_{search_CCA} is the time for AGC settling and PSS/SSS detection. If the target cell is known, $T_{search} = 0$ ms. If the target cell is unknown and the target cell $\hat{E}s/Iot \geq -2$dB, $T_{search} = (3*N+L_1*N) * Trs$ ms, where L_1 is the number of SMTC occasions groups with at least one SSB/SMTC occasion in the group is not transmitted by the gNB during the AGC settling and PSS/SSS detection. $L_{1,\ max}$=TBD, N is the Rx beam sweeping factor for FR2-2.

T_{Δ_CCA} is time for fine time tracking and acquiring full timing information of the target cell. $T_{\Delta} = (1+L_2) *Trs$ ms for a known or unknown PSCell, where L_2 is the number of SMTC occasions not avaible at the UE during the time tracking period. $L_{2,\ max}$ =TBD.

T_{PSCell_DU} is the interruption uncertainty due to the random access procedure when sending PRACH to the new cell. T_{PSCell_DU} can be up to: $(1+ L_3) * T_{SSB,RO} + 10$ ms where $T_{SSB,RO}$ is the SSB to PRACH occasion association period as defined in Table 8.1-1 of TS 38.213 [3] and L_3 is the number of consecutive SSB to PRACH occasion association periods during which no PRACH occasion is available for PRACH transmission due to UL CCA failure. $L_3 = 0$ for Type 3 UL channel access procedure as defined in TS 37.213 [33].

Trs is the SMTC periodicity of the target cell if the UE has been provided with an SMTC configuration for the target cell in PSCell addition message, otherwise Trs is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with Trs = 5 ms assuming the SSB transmission periodicity is 5 ms. There is no requirement if the SSB transmission periodicity is not 5 ms.

NOTE 1: The interruption time considering the potential extensions caused by L_1, L_2, L_3 and by the UL CCA failure detection/recovery mechanism is limited by the T304 timer. The UE behaviour at the T304 timer expiry is detailed in TS 38.331 [2].

In FR2-2, the PSCell is known if it has been meeting the following conditions:

- During the last 5 seconds before the reception of the PSCell configuration command:
  - the UE has sent a valid measurement report for the PSCell being configured and
  - One of the SSBs measured from the PSCell being configured remains detectable according to the cell identification conditions specified in clause 9.3A.
- One of the SSBs measured from PSCell being configured also remains detectable during the PSCell configuration delay $T_{config_PSCell_CCA}$ according to the cell identification conditions specified in clause 9.3A.

otherwise it is unknown.

The PCell interruption specified in clause 8.2 is allowed only during the RRC reconfiguration procedure [2].

8.9B.3 PSCell Release Delay Requirement

The requirements in this clause shall apply for a UE which is configured with PCell in FR1 and one PSCell in FR2-2.

Upon receiving PSCell release in subframe *n*, the UE shall accomplish the release actions specified in TS 38.331 [2] no later than in slot $n + \frac{T_{RRC_delay}}{NR\ slot\ length}$:

where

- T_{RRC_delay} is the RRC procedure delay as specified in TS 38.331 [2].

The PCell interruption specified in clause 8.2 is allowed only during the RRC reconfiguration procedure [2].

8.10 Active TCI state switching delay

8.10.1 Introduction

The requirements in this clause apply for a UE configured with one or more TCI state configurations on serving cell in MR-DC or standalone NR. UE shall complete the switch of active TCI state within the delay defined in this clause.

8.10.2 Known conditions for TCI state

The TCI state is known if the following conditions are met:

- During the period from the last transmission of the RS resource used for the L1-RSRP measurement reporting for the target TCI state to the completion of active TCI state switch, where the RS resource for L1-RSRP measurement is the RS in target TCI state or QCLed to the target TCI state
  - TCI state switch command is received within 1280 ms upon the last transmission of the RS resource for beam reporting or measurement
  - The UE has sent at least 1 L1-RSRP report for the target TCI state before the TCI state switch command
  - The TCI state remains detectable during the TCI state switching period
  - The SSB associated with the TCI state remain detectable during the TCI switching period
    - SNR of the TCI state $\geq$ -3dB

Otherwise, the TCI state is unknown.

8.10.3 MAC-CE based TCI state switch delay

If the target TCI state is known, upon receiving PDSCH carrying MAC-CE activation command in slot n, UE shall be able to receive PDCCH with target TCI state of the serving cell on which TCI state switch occurs at the first slot that is

after slot n+ T_{HARQ} + $3N_{slot}^{subframe,\mu}$+ TO_k*($T_{first\text{-}SSB}$ + $T_{SSB\text{-}proc}$) / *NR slot length*. The UE shall be able to receive PDCCH with the old TCI state until slot n+ T_{HARQ} + $3N_{slot}^{subframe,\mu}$ .Where T_{HARQ} is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [3];

- $T_{first\text{-}SSB}$ is time to first SSB transmission after MAC CE command is decoded by the UE; The SSB shall be the QCL-TypeA or QCL-TypeC to target TCI state
- $T_{SSB\text{-}proc}$ = 2 ms;
- TO_k = 1 if target TCI state is not in the active TCI state list for PDSCH, 0 otherwise.

If the target TCI state is unknown, upon receiving PDSCH carrying MAC-CE activation command in slot n, UE shall be able to receive PDCCH with target TCI state of the serving cell on which TCI state switch occurs at the first slot that is after slot n+ T_{HARQ} +$3N_{slot}^{subframe,\mu}$ + $T_{L1\text{-}RSRP}$ +TO_{uk}*($T_{first\text{-}SSB}$+ $T_{SSB\text{-}proc}$) / *NR slot length*. The UE shall be able to receive PDCCH with the old TCI state until slot n+ T_{HARQ} + $3N_{slot}^{subframe,\mu}$.

Where

- $T_{L1\text{-}RSRP}$ = 0 in FR1 or when the TCI state switching not involving QCL-TypeD in FR2. Otherwise,
- $T_{L1\text{-}RSRP}$ is the time for Rx beam refinement in FR2, defined as
- $T_{L1\text{-}RSPR_Measurement_Period_SSB}$ for SSB as specified in clause 9.5.4.1,
  - with the assumption of M=1
  - with T_{Report} = 0
- $T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS}$ for CSI-RS as specified in clause 9.5.4.2
  - configured with higher layer parameter *repetition* set to ON
  - with the assumption of M=1 for periodic CSI-RS
  - for aperiodic CSI-RS if number of resources in resource set at least equal to *MaxNumberRxBeam*
  - with T_{Report} = 0
- TO_{uk} = 1 for CSI-RS based L1-RSRP measurement, and 0 for SSB based L1-RSRP measurement when TCI state switching involves QCL-TypeD
- TO_{uk} = 1 when TCI state switching involves other QCL types only
- $T_{first\text{-}SSB}$ is time to first SSB transmission after L1-RSRP measurement when TCI state switching involves QCL-TypeD;
- $T_{first\text{-}SSB}$ is time to first SSB transmission after MAC CE command is decoded by the UE for other QCL types;

- The SSB shall be the QCL-TypeA or QCL-TypeC to target TCI state

8.10.3A MAC-CE based TCI state switch delay in HST FR2 scenarios

For FR2 power class 6 UE, if the target TCI state is known, upon receiving PDSCH carrying MAC-CE activation command in slot n, UE shall be able to receive PDCCH with target TCI state of the serving cell on which TCI state switch occurs at the symbol m of the first slot that is after slot n+ T_{HARQ} + $3N_{slot}^{subframe,\mu}$ + TO_k*($T_{first\text{-}SSB}$ + $T_{SSB\text{-}proc}$ + T_{rs} + $T_{rs\text{-}proc}$) / *NR slot length*. The UE shall be able to receive PDCCH with the old TCI state until slot n+ T_{HARQ} + $3N_{slot}^{subframe,\mu}$ .Where T_{HARQ} is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [3];

- $T_{first\text{-}SSB}$ is time to first SSB transmission after MAC CE command is decoded by the UE;
- $T_{SSB\text{-}proc}$ = 2 ms;

- T_{rs} is time to the first TRS or SSB transmission after the SSB transmission in the definition of $T_{first\text{-}SSB}$ is processed by the UE;

- $T_{rs\text{-}proc}$ = 2 ms;

- TO_k = 1, m = 0 if target TCI state is not in the active TCI state list for PDSCH; otherwise TO_k = 0, m = 1.

For FR2 power class 6 UE, if the target TCI state is unknown, the same requirement for unknown target TCI state case specified in clause 8.10.3 applies.

8.10.4 DCI based TCI state switch delay

If the target TCI state is known, when a UE is configured with the higher layer parameter *tci-PresentInDCI* which is set as 'enabled' for the CORESET scheduling PDSCH at slot n, UE shall be able to receive PDSCH with target TCI state of the serving cell on which TCI state switch occurs at the first slot that is after slot n+*timeDurationForQCL*, where, *timeDurationForQCL* is the time required by the UE to perform PDCCH reception and applying spatial QCL information received in DCI for PDSCH processing as described in TS 38.214 [26], the value of *timeDurationForQCL* is defined in TS 38.331 [2].

The known condition for TCI state defined in clause 8.10.2 is applied.

8.10.5 RRC based TCI state switch delay

If the target TCI state is known, UE shall be able to receive PDCCH with target TCI state of the serving cell on which TCI state switch occurs at the first slot that is after slot n+ $(T_{RRC_processing} + TO_k * (T_{first\text{-}SSB} + T_{SSB\text{-}proc}))$ / *NR slot length*, The UE is not required to receive PDCCH/PDSCH/CSI-RS or transmit PUCCH/PUSCH until the end of switching period.

Where

- Slot n is the last slot overlapping with the PDSCH carrying RRC activation command.

- $T_{RRC_processing}$ is the RRC processing delay defined in Clause 11.2 of TS 36.331 [16] if the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the RRC processing delay defined in Clause 12 of TS 38.331 [2].

- $T_{first\text{-}SSB}$ is time to first SSB transmission after RRC processing by the UE; The SSB shall be the QCL-TypeA or QCL-TypeC to target TCI state.

- $T_{SSB\text{-}proc}$ and TO_k are defined in clause 8.10.3.

If the target TCI state is unknown, UE shall be able to receive PDCCH with target TCI state of the serving cell on which TCI state switch occurs at the first slot that is after slot n+ $(T_{RRC_processing} + T_{L1\text{-}RSRP} + TO_{uk} * (T_{first\text{-}SSB} + T_{SSB\text{-}proc}))$ / *NR slot length*, The UE is not required to receive PDCCH/PDSCH/CSI-RS or transmit PUCCH/PUSCH until the end of switching period.

Where

- Slot n is the last slot overlapping with the PDSCH carrying RRC activation command.

- $T_{RRC_processing}$ is the RRC processing delay defined in Clause 11.2 of TS 36.331 [16] if the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the RRC processing delay defined in Clause 12 of TS 38.331 [2].

- $T_{first\text{-}SSB}$ is time to first SSB transmission after L1-RSRP measurement when TCI state switching involves QCL-TypeD;

- $T_{first\text{-}SSB}$ is time to first SSB transmission after RRC processing time at the UE for other QCL types;

  - The SSB shall be the QCL-TypeA or QCL-TypeC to target TCI state

- $T_{L1\text{-}RSRP}$, TO_{uk} and $T_{SSB\text{-}proc}$ are defined in clause 8.10.3.

The requirements for RRC based TCI state switch delay apply when only 1 TCI state is configured in RRC TCI state list. When $T_{HARQ} > T_{RRC_processing}$ a longer switching delay is allowed. Where T_{HARQ} is the time between DL data transmission and acknowledgement as specified in TS 38.213 [3].

8.10.6 Active TCI state list update delay

If the target TCI state is known, upon receiving PDSCH carrying MAC-CE active TCI state list update at slot n, UE shall be able to receive PDCCH to schedule PDSCH with the new target TCI state at the first slot that is after n+ T_{HARQ} +3$N_{slot}^{subframe,\mu}$ +TO_k*($T_{first\text{-}SSB}$ + $T_{SSB\text{-}proc}$) / *NR slot length*. Where T_{HARQ}, $T_{first\text{-}SSB,}$ $T_{SSB\text{-}proc}$ and TO_k are defined in clause 8.10.3.

8.10A Active TCI state switching delay with CCA

8.10A.1 Introduction

The requirements in this clause apply for a UE configured with one or more TCI state configurations on serving cell in EN-DC with PSCell on a carrier frequency with CCA or SA NR with PCell on a carrier frequency with CCA. UE shall complete the switch of active TCI state within the delay defined in this clause.

In the requirements of clause 8.10A, the term SSB occasion not available at the UE refers to when the SSB is configured by gNB in a cell on a carrier frequency subject to CCA, but the first two successive candidate SSB positions for the same SSB index within the discovery burst transmission window are not available at the UE due to DL CCA failures at gNB during the corresponding period; otherwise the SSB occasion is considered as available at the UE.

8.10A.2 Known conditions for TCI state

The TCI state is known if the following conditions are met:

- During the period from the last transmission of the RS resource used for the L1-RSRP measurement reporting for the target TCI state to the completion of active TCI state switch, where the RS resource for L1-RSRP measurement is the RS in target TCI state or QCLed to the target TCI state
  - TCI state switch command is received within 1280 ms of the last transmission of the RS resource for beam reporting or measurement
  - The UE has sent at least 1 L1-RSRP report for the target TCI state before the TCI state switch command
  - The TCI state remain detectable during the TCI state switching period in the SSB occasions available at the UE
  - The SSB associated with the TCI state remain detectable during the TCI switching period in the SSB occasions available at the UE
    - SNR of the TCI state is ≥ -3dB

Otherwise, the TCI state is unknown.

8.10A.3 MAC-CE based TCI state switch delay

If the target TCI state is known, upon receiving PDSCH carrying MAC-CE activation command at slot n, UE shall be able to receive PDCCH with target TCI state of the serving cell on which TCI state switch occurs at the first slot that is after slot n+ 3$N_{slot}^{subframe,\mu}$ +(T_{HARQ} +TO_k*($T_{first\text{-}SSB}$ + $T_{SSB\text{-}proc}$+T_{SSB}*$L_{MAC,known}$)) */NR slot length*. The UE shall be able to receive on the old TCI state until slot n + 3$N_{slot}^{subframe,\mu}$ + (T_{HARQ} +TO_k*($T_{first\text{-}SSB}$+ T_{SSB}*$L_{MAC,known}$)) / *NR slot length*, where

T_{HARQ} (in ms) is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [3]. In the event of UE not being able to transmit the acknowledgment due to UL CCA failures: T_{HARQ} is extended to also include the time to all next HARQ feedback transmissions and retransmission opportunities, until the time

of its successful transmission, as specified in TS 38.213 [3]; no extension of T_{HARQ} due to UL CCA failures is allowed for Type 2C UL channel access in TS 37.213;

$T_{first\text{-}SSB}$ is time to first SSB transmission occasion after MAC CE command is decoded by the UE, during which some SSB occasions may not be available at the UE due to DL CCA failures;

The SSB shall be the QCL-TypeA or QCL-TypeC to target TCI state;

$T_{SSB\text{-}proc}$ = 2 ms;

TO_k = 1 if target TCI state is not in the active TCI state list for PDSCH, 0 otherwise;

T_{SSB} = ssb-periodicityServingCell;

$L_{MAC,known} \leq L_{MAC,known,max}$ is the corresponding number of SSB occasions not available at the UE;

$L_{MAC,known,max}$ =2 for $T_{SSB} \leq 40$ ms, $L_{MAC,known,max}$ =1 for $T_{SSB} > 40$ ms.

If the target TCI state is unknown, upon receiving PDSCH carrying MAC-CE activation command at slot n, UE shall be able to receive PDCCH with target TCI state of the serving cell on which TCI state switch occurs at the first slot that is after slot $n+ 3N_{slot}^{subframe,\mu} + (T_{HARQ}+ T_{L1\text{-}RSRP} +TO_{uk}*(T_{first\text{-}SSB}+ T_{SSB\text{-}proc}+T_{SSB}*L_{MAC,unknown}))$ / *NR slot length* . The UE shall be able to receive on the old TCI state until slot $n+ 3N_{slot}^{subframe,\mu} + (T_{HARQ}+TO_{uk}*(T_{first\text{-}SSB}+ T_{SSB}*L_{MAC,unknown}))$ / *NR slot length*,

Where:

- $L_{MAC,unknown} \leq L_{MAC,unknown,max}$ is the corresponding number of SSB occasions groups not available at the UE;
- $L_{MAC,unknown,max}$ = 2 for $T_{SSB} \leq 40$ ms, $L_{MAC,unknown,max}$ = 1 for $T_{SSB} > 40$ ms;
- TO_{uk} = 1.
- $T_{L1\text{-}RSRP}$ = 0 in FR1 or when the TCI state switching not involving QCL-TypeD in FR2-2. Otherwise,
- $T_{L1\text{-}RSRP}$ is the time for Rx beam refinement in FR2-2, defined as
- $T_{L1\text{-}RSPR_Measurement_Period_SSB_CCA}$ for SSB as specified in clause 9.5A.4.1,
  - with the assumption of M=1
  - with T_{Report} = 0
- TO_{uk} = 0 for SSB based L1-RSRP measurement when TCI state switching involves QCL-TypeD
- TO_{uk} = 1 when TCI state switching involves other QCL types only
- $T_{first\text{-}SSB}$ is time to first SSB transmission after L1-RSRP measurement when TCI state switching involves QCL-TypeD;
- $T_{first\text{-}SSB}$ is time to first SSB transmission after MAC CE command is decoded by the UE for other QCL types;
  - The SSB shall be the QCL-TypeA or QCL-TypeC to target TCI state

8.10A.4 DCI based TCI state switch delay

If the target TCI state is known, when a UE is configured with the higher layer parameter *tci-PresentInDCI* which is set as 'enabled' for the CORESET scheduling the PDSCH at slot n, UE shall be able to receive PDSCH with target TCI state of the serving cell on which TCI state switch occurs at the first slot that is after slot n+*timeDurationForQCL*, where, *timeDurationForQCL* is the time required by the UE to perform PDCCH reception and applying spatial QCL information received in DCI for PDSCH processing as described in TS 38.214 [26], the value of *timeDurationForQCL* is defined in TS 38.306 [14].

The known condition for TCI state defined in clause 8.10A.2 is applied.

8.10A.5 RRC based TCI state switch delay

If the target TCI state is known, UE shall be able to receive PDCCH with target TCI state of the serving cell on which TCI state switch occurs at the first slot that is after slot n+ ($T_{RRC_processing}$ +TO_k*($T_{first\text{-}SSB}$ + $T_{SSB\text{-}proc}$+ T_{SSB}*$L_{RRC,known}$)) / *NR slot length*. The UE is not required to receive PDCCH/PDSCH/CSI-RS or transmit PUCCH/PUSCH until the end of switching period.

Where

- Slot n is last slot overlapping with the PDSCH carrying RRC activation command.
- $T_{RRC_processing}$ is the RRC processing delay defined in Clause 11.2 of 36.331 [16] is the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the RRC processing delay defined in Clause 12 of TS38.331 [2]
- $T_{first\text{-}SSB}$ is time to first SSB transmission occasion after RRC processing by the UE, during which some of the SSB occasions may not be availabledue to DL CCA failures;
  - The SSB shall be the QCL-TypeA or QCL-TypeC to target TCI state;
- $L_{RRC,known} \leq L_{RRC,known,max}$ is the corresponding number of SSB occasions not available at the UE;
  - $L_{RRC,known,max}$ =2 for $T_{SSB} \leq$ 40 ms, $L_{RRC,known,max}$ =1 for T_{SSB}>40 ms.
- $T_{SSB\text{-}proc}$, TO_k, and T_{SSB} are as defined in clause 8.10A.3.

If the target TCI state is unknown, UE shall be able to receive PDCCH with target TCI state of the serving cell on which TCI state switch occurs at the first slot that is after slot n+ ($T_{RRC_processing}$ +$T_{L1\text{-}RSRP}$ + TO_{uk}*($T_{first\text{-}SSB}$+ $T_{SSB\text{-}proc}$+T_{SSB}*$L_{RRC,unknown}$)) / *NR slot length*. The UE is not required to receive PDCCH/PDSCH/CSI-RS or transmit PUCCH/PUSCH until the end of switching period.

Where,

- Slot n is the last slot overlapping with the PDSCH carrying RRC activation command.
- $T_{RRC_processing}$ is the RRC processing delay defined in Clause 11.2 of 36.331 [16] is the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the RRC processing delay defined in Clause 12 of TS38.331 [2].
- $T_{first\text{-}SSB}$ is time to first SSB transmission after L1-RSRP measurement when TCI state switching involves QCL-TypeD;
- $T_{first\text{-}SSB}$ is time to first SSB transmission occasion after RRC processing time at the UE for other QCL types, during which some SSB occasions may not be available at the UE due to DL CCA failures;
  - The SSB shall be the QCL-TypeA or QCL-TypeC to target TCI state;
- $L_{RRC,unknown} \leq L_{RRC,unknown,max}$ is the corresponding number of SSB occasions not available at the UE;
  - $L_{RRC,unknown,max}$ = 2 for $T_{SSB} \leq$40 ms, $L_{RRC,unknown,max}$ = 1 for T_{SSB}>40 ms.
- $T_{L1\text{-}RSRP}$, TO_{uk}, $T_{SSB\text{-}proc}$, and T_{SSB} are as defined in clause 8.10A.3

The requirements for RRC based TCI state switch delay apply when only 1 TCI state is configured in RRC TCI state list. When $T_{HARQ} > T_{RRC_processing}$ a longer switching delay is allowed. Where T_{HARQ} is the time between DL data transmission and acknowledgement as specified in TS 38.213 [3].

8.10A.6 Active TCI state list update delay

If the target TCI state is known, upon receiving PDSCH carrying MAC-CE active TCI state list update at slot n, UE shall be able to receive PDCCH to schedule PDSCH with the new target TCI state at the first slot that is after n + $3N_{slot}^{subframe,\mu}$ + (T_{HARQ} +TO_k*($T_{first\text{-}SSB}$ + $T_{SSB\text{-}proc}$+T_{SSB}*$L_{MAC,known}$)) / *NR slot length*. Where T_{HARQ}, $T_{first\text{-}SSB}$, $T_{SSB\text{-}proc}$, T_{SSB}, $L_{MAC,known}$ and TO_k are as defined in clause 8.10A.3.

8.10B Active TCI state switching delay for RedCap

8.10B.1 Introduction

The requirements in this clause apply for a RedCap UE configured with one or more TCI state configurations on serving cell in standalone NR. UE shall complete the switch of active TCI state within the delay defined in this clause.

8.10B.2 Known conditions for TCI state

The TCI state is known if the following conditions are met:

- During the period from the last transmission of the RS resource used for the L1-RSRP measurement reporting for the target TCI state to the completion of active TCI state switch, where the RS resource for L1-RSRP measurement is the RS in target TCI state or QCLed to the target TCI state
  - TCI state switch command is received within 1280 ms upon the last transmission of the RS resource for beam reporting or measurement
  - The UE has sent at least 1 L1-RSRP report for the target TCI state before the TCI state switch command
  - The TCI state remains detectable during the TCI state switching period
  - The SSB associated with the TCI state remain detectable during the TCI switching period
  - SNR of the TCI state $\geq$ -3dB

Otherwise, the TCI state is unknown.

8.10B.3 MAC-CE based TCI state switch delay

If the target TCI state is known, upon receiving PDSCH carrying MAC-CE activation command in slot n, UE shall be able to receive PDCCH with target TCI state of the serving cell on which TCI state switch occurs at the first slot that is after slot n+ T_{HARQ} + $3N_{slot}^{subframe,\mu}$+ TO_k*($T_{first\text{-}SSB}$ + $T_{SSB\text{-}proc}$) / *NR slot length*. The UE shall be able to receive PDCCH with the old TCI state until slot n+ T_{HARQ} + $3N_{slot}^{subframe,\mu}$ .Where T_{HARQ} is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [3];

- $T_{first\text{-}SSB}$ is time to first SSB transmission after MAC CE command is decoded by the UE; The SSB shall be the QCL-TypeA or QCL-TypeC to target TCI state
- $T_{SSB\text{-}proc}$ = 2 ms;
- TO_k = 1 if target TCI state is not in the active TCI state list for PDSCH, 0 otherwise.

If the target TCI state is unknown, upon receiving PDSCH carrying MAC-CE activation command in slot n, UE shall be able to receive PDCCH with target TCI state of the serving cell on which TCI state switch occurs at the first slot that is after slot n+ T_{HARQ} +$3N_{slot}^{subframe,\mu}$ + $T_{L1\text{-}RSRP}$ +TO_{uk}*($T_{first\text{-}SSB}$+ $T_{SSB\text{-}proc}$) / *NR slot length*. The UE shall be able to receive PDCCH with the old TCI state until slot n+ T_{HARQ} + $3N_{slot}^{subframe,\mu}$.

Where

- $T_{L1\text{-}RSRP}$ = 0 in FR1 or when the TCI state switching not involving QCL-TypeD in FR2. Otherwise,
- $T_{L1\text{-}RSRP}$ is the time for Rx beam refinement in FR2, defined as
- $T_{L1\text{-}RSPR_Measurement_Period_SSB_RedCap}$ for SSB as specified in clause 9.5B.4.1,
  - with the assumption of M=1
  - with T_{Report} = 0
- $T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS_RedCap}$ for CSI-RS as specified in clause 9.5B.4.2
  - configured with higher layer parameter *repetition* set to ON

- with the assumption of M=1 for periodic CSI-RS
- for aperiodic CSI-RS if number of resources in resource set at least equal to *MaxNumberRxBeam*
- with T_{Report} = 0
- TO_{uk} = 1 for CSI-RS based L1-RSRP measurement, and 0 for SSB based L1-RSRP measurement when TCI state switching involves QCL-TypeD
- TO_{uk} = 1 when TCI state switching involves other QCL types only
- $T_{first\text{-}SSB}$ is time to first SSB transmission after L1-RSRP measurement when TCI state switching involves QCL-TypeD;
- $T_{first\text{-}SSB}$ is time to first SSB transmission after MAC CE command is decoded by the UE for other QCL types;

- The SSB shall be the QCL-TypeA or QCL-TypeC to target TCI state

8.10B.4 DCI based TCI state switch delay

If the target TCI state is known, when a UE is configured with the higher layer parameter *tci-PresentInDCI* which is set as 'enabled' for the CORESET scheduling PDSCH at slot n, UE shall be able to receive PDSCH with target TCI state of the serving cell on which TCI state switch occurs at the first slot that is after slot n+*timeDurationForQCL*, where, *timeDurationForQCL* is the time required by the UE to perform PDCCH reception and applying spatial QCL information received in DCI for PDSCH processing as described in TS 38.214 [26], the value of *timeDurationForQCL* is defined in TS 38.331 [2].

The known condition for TCI state defined in clause 8.10.2 is applied.

8.10B.5 RRC based TCI state switch delay

If the target TCI state is known, UE shall be able to receive PDCCH with target TCI state of the serving cell on which TCI state switch occurs at the first slot that is after slot n+ $(T_{RRC_processing} + TO_k * (T_{first\text{-}SSB} + T_{SSB\text{-}proc}))$ / *NR slot length*, The UE is not required to receive PDCCH/PDSCH/CSI-RS or transmit PUCCH/PUSCH until the end of switching period.

Where

- Slot n is the last slot overlapping with the PDSCH carrying RRC activation command.
- $T_{RRC_processing}$ is the RRC processing delay defined in Clause 11.2 of TS 36.331 [16] if the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the RRC processing delay defined in Clause 12 of TS 38.331 [2].
- $T_{first\text{-}SSB}$ is time to first SSB transmission after RRC processing by the UE; The SSB shall be the QCL-TypeA or QCL-TypeC to target TCI state.
- $T_{SSB\text{-}proc}$ and TO_k are defined in clause 8.10.3.

If the target TCI state is unknown, UE shall be able to receive PDCCH with target TCI state of the serving cell on which TCI state switch occurs at the first slot that is after slot n+ $(T_{RRC_processing} + T_{L1\text{-}RSRP} + TO_{uk} * (T_{first\text{-}SSB} + T_{SSB\text{-}proc}))$ / *NR slot length*, The UE is not required to receive PDCCH/PDSCH/CSI-RS or transmit PUCCH/PUSCH until the end of switching period.

Where

- Slot n is the last slot overlapping with the PDSCH carrying RRC activation command.
- $T_{RRC_processing}$ is the RRC processing delay defined in Clause 11.2 of TS 36.331 [16] if the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the RRC processing delay defined in Clause 12 of TS 38.331 [2].
- $T_{first\text{-}SSB}$ is time to first SSB transmission after L1-RSRP measurement when TCI state switching involves QCL-TypeD;

- $T_{first\text{-}SSB}$ is time to first SSB transmission after RRC processing time at the UE for other QCL types;
  - The SSB shall be the QCL-TypeA or QCL-TypeC to target TCI state
  - $T_{L1\text{-}RSRP}$, TO_{uk} and $T_{SSB\text{-}proc}$ are defined in clause 8.10.3.

The requirements for RRC based TCI state switch delay apply when only 1 TCI state is configured in RRC TCI state list. When $T_{HARQ} > T_{RRC_processing}$ a longer switching delay is allowed. Where T_{HARQ} is the time between DL data transmission and acknowledgement as specified in TS 38.213 [3].

8.10B.6 Active TCI state list update delay

If the target TCI state is known, upon receiving PDSCH carrying MAC-CE active TCI state list update at slot n, UE shall be able to receive PDCCH to schedule PDSCH with the new target TCI state at the first slot that is after n+ T_{HARQ} +$3N_{slot}^{subframe,\mu}$ +TO_k*($T_{first\text{-}SSB}$ + $T_{SSB\text{-}proc}$) / *NR slot length*. Where T_{HARQ}, $T_{first\text{-}SSB,}$ $T_{SSB\text{-}proc}$ and TO_k are defined in clause 8.10.3.

8.10C Active TCI state switching delay for satellite access

8.10C.1 Introduction

The requirements in this clause apply for a UE configured with one or more TCI state configurations on Pcell in satellite access. UE shall complete the switch of active TCI state within the delay defined in this clause.

8.10C.2 MAC-CE based TCI state switch delay

Upon receiving PDSCH carrying MAC-CE activation command in slot n, UE shall be able to receive PDCCH with target TCI state of the serving cell on which TCI state switch occurs at the first slot that is after slot n+ T_{HARQ} + $3N_{slot}^{subframe,\mu}$+ TO_k*($T_{first\text{-}SSB}$ + $T_{SSB\text{-}proc}$) / *NR slot length*. The UE shall be able to receive PDCCH with the old TCI state until slot n+ T_{HARQ} + $3N_{slot}^{subframe,\mu}$ .Where T_{HARQ} is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [3];

- $T_{first\text{-}SSB}$ is time to first SSB transmission after MAC CE command is decoded by the UE; The SSB shall be the QCL-TypeA or QCL-TypeC to target TCI state
- $T_{SSB\text{-}proc}$ = 2 ms;
- TO_k = 1 if target TCI state is not in the active TCI state list for PDSCH, 0 otherwise.

8.10C.4 DCI based TCI state switch delay

When a UE is configured with the higher layer parameter *tci-PresentInDCI* which is set as 'enabled' for the CORESET scheduling PDSCH at slot n, UE shall be able to receive PDSCH with target TCI state of the serving cell on which TCI state switch occurs at the first slot that is after slot n+*timeDurationForQCL*, where, *timeDurationForQCL* is the time required by the UE to perform PDCCH reception and applying spatial QCL information received in DCI for PDSCH processing as described in TS 38.214 [26], the value of *timeDurationForQCL* is defined in TS 38.331 [2].

8.10C.5 RRC based TCI state switch delay

UE shall be able to receive PDCCH with target TCI state of the serving cell on which TCI state switch occurs at the first slot that is after slot n+ ($T_{RRC_processing}$ +TO_k*($T_{first\text{-}SSB}$ + $T_{SSB\text{-}proc}$)) / *NR slot length*, The UE is not required to receive PDCCH/PDSCH/CSI-RS or transmit PUCCH/PUSCH until the end of switching period.

Where

- Slot n is the last slot overlapping with the PDSCH carrying RRC activation command.
- $T_{RRC_processing}$ is the RRC processing delay defined in Clause 12 of TS 38.331 [2].

- $T_{first-SSB}$ is time to first SSB transmission after RRC processing by the UE; The SSB shall be the QCL-TypeA or QCL-TypeC to target TCI state.

- $T_{SSB-proc}$ and TO_k are defined in clause 8.10C.2.

The requirements for RRC based TCI state switch delay apply when only 1 TCI state is configured in RRC TCI state list. When $T_{HARQ} > T_{RRC_processing}$ a longer switching delay is allowed. Where T_{HARQ} is the time between DL data transmission and acknowledgement as specified in TS 38.213 [3].

8.10C.6 Active TCI state list update delay

Upon receiving PDSCH carrying MAC-CE active TCI state list update at slot n, UE shall be able to receive PDCCH to schedule PDSCH with the new target TCI state at the first slot that is after n+ T_{HARQ} +3$N_{slot}^{subframe,\mu}$ +TO_k*($T_{first-SSB}$ + $T_{SSB-proc}$) / *NR slot length*. Where T_{HARQ}, $T_{first-SSB,}$ $T_{SSB-proc}$ and TO_k are defined in clause 8.10C.2.

8.11 PSCell Change

This clause defines requirements for the delay within which the UE shall be able to change PSCell to other cell in EN-DC or NR-DC. The requirements in this clause are applicable to EN-DC and NR-DC.

The UE shall be capable of transmitting PRACH preamble towards the target PSCell no later than specified in clause 8.9.2 for the case of NR-DC and in TS 36.133 clause 7.31.2 for the case of EN-DC,, where the following values for slot n, $T_{processing}$ and T_{RRC_delay} shall override the existing ones:

- Slot n is the last slot overlapping with the PDSCH containing PSCell change,

- $T_{processing}$ = 20 ms when source and target cells are in the same FR,

- $T_{processing}$ = 40 ms when source and target cells are in different FRs.

- T_{RRC_delay} is the RRC procedure delay as specified in TS 36.331 [16] if the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the RRC procedure delay as specified in TS 38.331 [2].

If the SMTC periodicity of the target cell is not provided within the PSCell change message, and measObjectNRs having the same SSB frequency and subcarrier spacing configured by MN and SN have different SMTC, T_{rs} is the periodicity of one of the SMTC which is up to UE implementation.

The target PSCell is known if it has been meeting the conditions in clause 8.9.2 for the case of NR-DC and in TS36.133 clause 7.31.2 for the case of EN-DC.

The interruption on PCell and other serving cells specified in TS36.133 clause 7.32.2.1 for EN-DC and in TS38.133 clause 8.2.4.2.1 for NR-DC is allowed only during the RRC reconfiguration procedure [2].

8.11A PSCell Change in Carriers with CCA

This clause defines requirements for the delay within which the UE shall be able to change PSCell in FR2-2 with CCA to other cell in NR-DC. The requirements in this clause are applicable to NR-DC.

The UE shall be capable of transmitting PRACH preamble towards the target PSCell no later than specified in clause 8.9A.2 for the case of NR-DC, where the following values for slot n, $T_{processing}$ and T_{RRC_delay} shall override the existing ones:

- Slot n is the last slot overlapping with the PDSCH containing PSCell change,

- $T_{processing}$ = 20 ms when source and target cells are in the same FR,

- $T_{processing}$ = 40 ms when source and target cells are in different FRs.

- T_{RRC_delay} is the RRC procedure delay as specified in TS 38.331 [2].

If the SMTC periodicity of the target cell is not provided within the PSCell change message, and measObjectNRs having the same SSB frequency and subcarrier spacing configured by MN and SN have different SMTC, T_{rs} is the periodicity of one of the SMTC which is up to UE implementation.

The target PSCell is known if it has been meeting the conditions in clause 8.9A.2 for the case of NR-DC.

The interruption on PCell and other serving cells specified in TS38.133 clause 8.2.4.2.1 for NR-DC is allowed only during the RRC reconfiguration procedure [2].

8.11B Conditional PSCell Change

8.11B.1 Introduction

This clause defines requirements for the delay within which the UE shall be able to perform conditional PSCell change in EN-DC or NR-DC. The requirements in this clause are applicable to EN-DC and NR-DC.

8.11B.2 Conditoinal PSCell Change delay

The requirements in this clause shall apply for the UE configured with only PCell in FR1.

The UE shall be capable to transmit PRACH preamble towards the new target PSCell no later than in slot $n + T_{config_PSCell_Conditional}$:

Where:

- Slot n is the last slot overlapping with the PDSCH containing conditional PSCell change.
- $T_{config_PSCell_Conditional} = T_{RRC_delay} + T_{Event_DU} + T_{measure} + T_{UE_preparation} + T_{processing} + T_{\Delta} + T_{PSCell_DU} + 2$ ms
  - T_{RRC_delay} is the RRC processing delay defined in Clause 11.2 in 36.331 [16] is the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the RRC procedure delay defined in clause 12 in TS 38.331 [2] for processing the conditional PSCell change command.
  - T_{Event_DU} is the delay uncertainty which is the time from when the UE successfully decodes a conditional PSCell change command until a condition exists at the measurement reference point which will trigger the conditional PSCell change.
  - $T_{measure}$ is the measurements time stated in clause 8.11B.2.1.
  - $T_{UE_preparation}$ is the UE preparation time for conditional PSCell change, and starts after UE realizes the condition of PSCell change is met and identity of new PSCell is determined. $T_{UE_preparation}$ is up to 10ms.
  - $T_{processing}$ is the SW processing time needed by UE, including RF warm up period. $T_{processing}$ = 20 ms when source and target cells are in the same FR, and $T_{processing}$ = 40 ms when source and target cells are in different FRs.
  - T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell. $T_{\Delta} = 1*T_{rs}$ ms.
    - T_{rs} is the SMTC periodicity of the target cell if the UE has been provided with an SMTC configuration for the target cell in PSCell addition message, otherwise T_{rs} is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with T_{rs} = 5 ms assuming the SSB transmission periodicity is 5 ms. There is no requirement if the SSB transmission periodicity is not 5 ms.
  - T_{PSCell_DU} is the delay uncertainty in acquiring the first available PRACH occasion in the PSCell. T_{PSCell_DU} is up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in Table 8.1-1 of TS 38.213 [3].

The PCell interruption specified in clause 8.2 is allowed only after the UE starts to execute a conditional PSCell change.

8.11B.2.1 Measurement time

The measurement time delay is defined from the end of T_{Event_DU} until UE executes a PSCell change to a target cell and interruption time starts.

For intra-frequency PSCell change, the measurement time delay measured without Time To Trigger (TTT) and L3 filtering shall be less than $T_{identify\ intra\ with\ index}$ or $T_{identify_intra_without_index}$ defined in clause 9.2.5.1 or clause 9.2.6.2.

For inter-frequency PSCell change, the measurement time delay measured without Time To Trigger (TTT) and L3 filtering shall be less than $T_{identify_inter_without_index}$ or $T_{identify_inter_with_index}$ defined in clause 9.3.4. When TTT or L3 filtering is used an additional delay can be expected.

A cell is detectable only if at least one SSB measured from the cell being configured remains detectable during the time period $T_{identify_intra_without_index}$ or $T_{identify_intra_with_index}$ for intra-frequency PSCell change or the time period $T_{identify_inter_without_index}$ or $T_{identify_inter_with_index}$ for inter-frequency PSCell change. If a cell, which has been detectable at least for the time period $T_{identify_intra_without_index}$ or $T_{identify_intra_with_index}$ for intra-frequency PSCell change or the time period $T_{identify_inter_without_index}$ or $T_{identify_inter_with_index}$ for inter-frequency PSCell change, becomes undetectable for a period and then the cell becomes detectable again and triggers a PSCell change, the measurement time delay shall be less than $T_{SSB_measurement_period_intra}$ or $T_{SSB_measurement_period_inter}$ provided the timing to that cell has not changed more than $\pm 3200/2^{\mu}$ Tc while the measurement gap has not been available and the L3 filter has not been used, where μ is the SCS configuration as defined in clause 4.2 of TS 38.211 [3]. When L3 filtering is used, an additional delay can be expected.

8.11D Conditional PSCell Change in Carriers with CCA

8.11D.1 Introduction

This clause defines requirements for the delay within which the UE shall be able to perform conditional PSCell in FR2-2 with CCA change in NR-DC. The requirements in this clause are applicable to NR-DC.

8.11D.2 Conditional PSCell Change delay

The requirements in this clause shall apply for the UE configured with only PCell in FR1.

The UE shall be capable to transmit PRACH preamble towards the new target PSCell no later than in slot n + $\frac{T_{config_PSCell_Conditional}}{NR\ slot\ length}$:

Where:

- Slot n is the last slot overlapping with the PDSCH containing conditional PSCell change.
- $T_{config_PSCell_Conditional} = T_{RRC_delay} + T_{Event_DU} + T_{measure_CCA} + T_{UE_preparation} + T_{processing} + T_{\Delta_CCA} + T_{PSCell_DU} + 2$ ms
  - T_{RRC_delay} is the RRC procedure delay defined in clause 12 in TS 38.331 [2] for processing the conditional PSCell change command.
  - T_{Event_DU} is the delay uncertainty which is the time from when the UE successfully decodes a conditional PSCell change command until a condition exists at the measurement reference point which will trigger the conditional PSCell change.
  - $T_{measure_CCA}$ is the measurements time stated in clause 8.11D.2.1.
  - $T_{UE_preparation}$ is the UE preparation time for conditional PSCell change, and starts after UE realizes the condition of PSCell change is met and identity of new PSCell is determined. $T_{UE_preparation}$ is up to 10ms.
  - $T_{processing}$ is the SW processing time needed by UE, including RF warm up period. $T_{processing}$ = 20 ms when source and target cells are in the same FR, and $T_{processing}$ = 40 ms when source and target cells are in different FRs.

- T_{Δ_CCA} is time for fine time tracking and acquiring full timing information of the target cell. $T_{\Delta} = (1+L_2) * T_{rs}$ ms, where L_2 is the number of SMTC occasions not avaible at the UE during the time tracking period. $L_{2, max}$ =TBD.

  - T_{rs} is the SMTC periodicity of the target cell if the UE has been provided with an SMTC configuration for the target cell in PSCell addition message, otherwise T_{rs} is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with T_{rs} = 5 ms assuming the SSB transmission periodicity is 5 ms. There is no requirement if the SSB transmission periodicity is not 5 ms.

  - T_{PSCell_DU} is the interruption uncertainty due to the random access procedure when sending PRACH to the new cell. T_{PSCell_DU} can be up to: $(1+ L_3) * T_{SSB,RO} + 10$ ms where $T_{SSB,RO}$ is the SSB to PRACH occasion association period as defined in Table 8.1-1 of TS 38.213 [3] and L_3 is the number of consecutive SSB to PRACH occasion association periods during which no PRACH occasion is available for PRACH transmission due to UL CCA failure. $L_3 = 0$ for Type 3 UL channel access procedure as defined in TS 37.213 [33].

NOTE 1: The interruption time considering the potential extensions caused by L_2, L_3 and by the UL CCA failure detection/recovery mechanism is limited by the T304 timer. The UE behaviour at the T304 timer expiry is detailed in TS 38.331 [2].

The PCell interruption specified in clause 8.2 is allowed only after the UE starts to execute a conditional PSCell change.

8.11D.2.1 Measurement time

The measurement time delay is defined from the end of T_{Event_DU} until UE executes a PSCell change to a target cell and interruption time starts.

For intra-frequency PSCell change, the measurement time delay measured without Time To Trigger (TTT) and L3 filtering shall be less than $T_{identify\ intra_cca\ with\ index}$ or $T_{identify_intra_cca_without_index}$ defined in clause 9.2A.5.1 or clause 9.2A.6.2.

For inter-frequency PSCell change, the measurement time delay measured without Time To Trigger (TTT) and L3 filtering shall be less than $T_{identify_inter_cca_without_index}$ or $T_{identify_inter_cca_with_index}$ defined in clause 9.3A.4. When TTT or L3 filtering is used an additional delay can be expected.

A cell is detectable only if at least one SSB measured from the cell being configured remains detectable during the time period $T_{identify_intra_cca_without_index}$ or $T_{identify_intra_cca_with_index}$ for intra-frequency PSCell change or the time period $T_{identify_inter_cca_without_index}$ or $T_{identify_inter_cca_with_index}$ for inter-frequency PSCell change. If a cell, which has been detectable at least for the time period $T_{identify_intra_cca_without_index}$ or $T_{identify_intra_cca_with_index}$ for intra-frequency PSCell change or the time period $T_{identify_inter_cca_without_index}$ or $T_{identify_inter_cca_with_index}$ for inter-frequency PSCell change, becomes undetectable for a period and then the cell becomes detectable again and triggers a PSCell change, the measurement time delay shall be less than $T_{SSB_measurement_period_intra_cca}$ or $T_{SSB_measurement_period_inter_cca}$ provided the timing to that cell has not changed more than ± 3200 Tc while the measurement gap has not been available and the L3 filter has not been used. When L3 filtering is used, an additional delay can be expected.

8.12 Uplink spatial relation switch delay

8.12.1 Introduction

The requirements in this clause apply for a UE configured with one or more spatial relation configurations on serving cell in MR-DC or standalone NR. There is no requirement when the UE is requested to switch to a spatial relation with the higher layer parameter *spatialRelationInfo* associated to SRS. UE shall complete the switch of active spatial relation within the delay defined in this clause when the UE is requested to switch to a spatial relation with the higher layer parameter *spatialRelationInfo* associated to a DL RS.

8.12.2 Known conditions for spatial relation when associated with DL-RS

The spatial relation associated to DL RS is known if the following conditions are met:

- During the period from the last transmission of the DL RS resource used for the L1-RSRP measurement reporting for the target spatial relation to the completion of active spatial relation switch, where the DL RS resource for L1-RSRP measurement is the DL RS in target spatial relation or QCLed to the target spatial relation with QCL type-D.
  - Spatial relation switch command is received within 1280 ms upon the last transmission of the DL RS resource for beam reporting or measurement
  - The UE has sent at least 1 L1-RSRP report for the target spatial relation before the spatial relation switch command
  - The DL RS configured in spatial relation remains detectable during the spatial relation switching period
    - SNR of the DL RS configured in spatial relation ≥ -3dB
  - The SSB associated with the spatial relation remain detectable during the spatial relation switching period
    - SNR of the SSB associated with the spatial relation ≥ -3dB

Otherwise, the spatial relation is unknown.

8.12.3 MAC-CE based spatial relation switch delay

If the target spatial relation associated to DL RS is known, upon receiving PDSCH carrying MAC-CE activation command in slot n, for UL spatial relation switch for PUCCH or semi-persistent SRS transmission of serving cell with a target UL spatial relation, the UE shall be able to transmit PUCCH or semi-persistent SRS with the target UL spatial relation in the slot n+ T_{HARQ} + $3N_{slot}^{subframe,\mu}$+ 1 when *beamCorrespondenceWithoutUL-BeamSweeping* is set to 1 where T_{HARQ} is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [3].

If the target spatial relation associated to DL RS is unknown, upon receiving PDSCH carrying MAC-CE activation command in slot n, for UL spatial relation switch for PUCCH or semi-persistent SRS transmission of serving cell with a target UL spatial relation, the UE shall be able to transmit PUCCH or semi-persistent SRS with the target UL spatial relation in the slot n+ T_{HARQ} + $3N_{slot}^{subframe,\mu}$+ $T_{L1\text{-}RSRP}$+1 when *beamCorrespondenceWithoutUL-BeamSweeping* is set to 1.

Where

- T_{HARQ} is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [3],
- $T_{L1\text{-}RSRP}$ is the time for Rx beam refinement in FR2, defined as
  - $T_{L1\text{-}RSPR_Measurement_Period_SSB}$ for SSB as specified in clause 9.5.4.1,
    - with the assumption of M=1
    - with T_{Report} = 0
  - $T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS}$ for CSI-RS as specified in clause 9.5.4.2
    - configured with higher layer parameter *repetition* set to ON
    - with the assumption of M=1 for periodic CSI-RS
    - for aperiodic CSI-RS if number of resources in resource set at least equal to *MaxNumberRxBeam*
    - with $_{T}$Report = 0

The UE shall be able to transmit with the old UL spatial relation until slot n+ T_{HARQ} + $3N_{slot}^{subframe,\mu}$.

When the UL spatial relation info switch for PUCCH changes both the associated DL RS and *pucch-PathlossReferenceRS* with the same MAC-CE activation, and if both the DL RS and *pucch-PathlossReferenceRS* are known as specified in clause 8.12.2 and 8.14.2 respectively, the UE shall be able to transmit PUCCH with the target UL spatial relation after the delay specified in clause 8.14.3. If either the associated DL RS or *pucch-PathlossReferenceRS* are unknown, a longer switching delay is allowed. The UE is not required to transmit PUCCH with the target UL spatial relation until the DL RS and pathloss reference RS switch are completed.

8.12.4 DCI based spatial relation switch delay

If the target spatial relation associated to DL RS is known, when a UE receives the DCI triggering aperiodic SRS at slot n with the higher layer parameter *spatialRelationInfo*, UE shall be able to transmit aperiodic SRS with target spatial relation of the serving cell on which spatial relation switch occurs in the slot $\left\lfloor n \cdot \frac{2^{\mu_{SRS}}}{2^{\mu_{PDCCH}}} \right\rfloor + k + 1$, where, k is configured via higher layer parameter *slotOffset*[2] for each triggered SRS resources set and is based on the subcarrier spacing of the triggered SRS transmission, μ_{SRS} and μ_{PDCCH} are the subcarrier spacing configurations for triggered SRS and PDCCH carrying the triggering command respectively in TS 38.214 [26].

The known condition for spatial relation associated to DL RS defined in clause 8.12.2 is applied.

8.12.5 RRC based spatial relation switch delay

If the target spatial relation associated to DL RS is known, UE shall be able to transmit target periodic SRS with spatial relation of the serving cell on which periodic SRS with spatial relation reconfigured in the slot n+ $T_{RRC_processing}$ */NR slot length* +1 when *beamCorrespondenceWithoutUL-BeamSweeping* is set to 1.

Where

- Slot n is the last slot overlapping with the PDSCH carrying RRC activation command,
- $T_{RRC_processing}$ is the RRC processing delay defined in 36.331 [16] is the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the RRC processing delay defined in TS38.331 [2].

If the target spatial relation associated to DL RS is unknown, UE shall be able to transmit target periodic SRS with spatial relation of the serving cell on which periodic SRS with spatial relation reconfigured in the slot n+ $T_{RRC_processing}$ */NR slot length* + $T_{L1\text{-}RSRP}$ +1 when *beamCorrespondenceWithoutUL-BeamSweeping* is set to 1.

Where

- Slot n is the last slot overlapping with the PDSCH carrying RRC activation command,
- $T_{RRC_processing}$ is the RRC processing delay defined in 36.331 [16] is the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the RRC processing delay defined in TS38.331 [2].
- $T_{L1\text{-}RSRP}$ is defined in clause 8.12.3

8.12A Uplink spatial relation switch delay for RedCap

8.12A.1 Introduction

The requirements in this clause apply for a RedCap UE configured with one or more spatial relation configurations on serving cell in standalone NR. There is no requirement when the UE is requested to switch to a spatial relation with the higher layer parameter *spatialRelationInfo* associated to SRS. UE shall complete the switch of active spatial relation within the delay defined in this clause when the UE is requested to switch to a spatial relation with the higher layer parameter *spatialRelationInfo* associated to a DL RS.

8.12A.2 Known conditions for spatial relation when associated with DL-RS

The spatial relation associated to DL RS is known if the following conditions are met:

- During the period from the last transmission of the DL RS resource used for the L1-RSRP measurement reporting for the target spatial relation to the completion of active spatial relation, where the DL RS resource for L1-RSRP measurement is the DL RS in target spatial relation or QCLed to the target spatial relation with QCL type-D.

- Spatial relation switch command is received within 1280 ms upon the last transmission of the DL RS resource for beam reporting or measurement
- The UE has sent at least 1 L1-RSRP report for the target spatial relation before the spatial relation switch command
- The DL RS configured in spatial relation remains detectable during the spatial relation switching period
  - SNR of the DL RS configured in spatial relation ≥ -3dB
- The SSB associated with the spatial relation remain detectable during the spatial relation switching period
  - SNR of the SSB associated with the spatial relation ≥ -3dB

Otherwise, the spatial relation is unknown.

8.12A.3 MAC-CE based spatial relation switch delay

If the target spatial relation associated to DL RS is known and UE is configured with uplink resources for transmission on target spatial relation, upon receiving PDSCH carrying MAC-CE activation command in slot n, for UL spatial relation switch for PUCCH or semi-persistent SRS transmission of serving cell with a target UL spatial relation, the UE shall be able to transmit PUCCH or semi-persistent SRS with the target UL spatial relation no later than slot n+ T_{HARQ} + $3N_{slot}^{subframe,\mu}$+ 1 when *beamCorrespondenceWithoutUL-BeamSweeping* is set to 1 where T_{HARQ} is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [3].

If the target spatial relation associated to DL RS is unknown and UE is configured with uplink resources for transmission on target spatial relation, upon receiving PDSCH carrying MAC-CE activation command in slot n, for UL spatial relation switch for PUCCH or semi-persistent SRS transmission of serving cell with a target UL spatial relation, the UE shall be able to transmit PUCCH or semi-persistent SRS with the target UL spatial relation no later than slot n+ T_{HARQ} + $3N_{slot}^{subframe,\mu}$+ $T_{L1\text{-}RSRP}$+1 when *beamCorrespondenceWithoutUL-BeamSweeping* is set to 1.

Where

- T_{HARQ} is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [3],
- $T_{L1\text{-}RSRP}$ is the time for Rx beam refinement in FR2, defined as
  - $T_{L1\text{-}RSRP_Measurement_Period_SSB_RedCap}$ for SSB as specified in clause 9.5B,
    - with the assumption of M=1
    - with T_{Report} = 0
  - $T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS_RedCap}$ for CSI-RS as specified in clause 9.5.4.2
    - configured with higher layer parameter *repetition* set to ON
    - with the assumption of M=1 for periodic CSI-RS
    - for aperiodic CSI-RS if number of resources in resource set at least equal to *MaxNumberRxBeam*
    - with $_{T}$Report = 0

The UE shall be able to transmit with the old UL spatial relation until slot n+ T_{HARQ} + $3N_{slot}^{subframe,\mu}$.

For RedCap UE in HD-FDD mode, if a downlink reception overlaps with PUCCH or semi-persistent SRS transmission of the serving cell with the target UL spatial relation then the UE is allowed to postpone the uplink transmission.

When the UL spatial relation info switch for PUCCH changes both the associated DL RS and *pucch-PathlossReferenceRS* with the same MAC-CE activation, and if both the DL RS and *pucch-PathlossReferenceRS* are known as specified in clause 8.12A.2 and 8.14.2 respectively, the UE shall be able to transmit PUCCH with the target UL spatial relation after the delay specified in clause 8.14.3. If either the associated DL RS or *pucch-PathlossReferenceRS* are unknown, a longer switching delay is allowed. The UE is not required to transmit PUCCH with the target UL spatial relation until the DL RS and pathloss reference RS switch are completed.

8.12A.4 DCI based spatial relation switch delay

If the target spatial relation associated to DL RS is known and UE is configured with uplink resources for transmission on target spatial relation, when a UE receives the DCI triggering aperiodic SRS at slot n with the higher layer parameter *spatialRelationInfo*, UE shall be able to transmit aperiodic SRS with target spatial relation of the serving cell on which spatial relation switch occurs no later than slot $\left\lfloor n \cdot \frac{2^{\mu_{SRS}}}{2^{\mu_{PDCCH}}} \right\rfloor + k + 1$, where, k is configured via higher layer parameter *slotOffset*[2] for each triggered SRS resources set and is based on the subcarrier spacing of the triggered SRS transmission, μ_{SRS} and μ_{PDCCH} are the subcarrier spacing configurations for triggered SRS and PDCCH carrying the triggering command respectively in TS 38.214 [26].

For RedCap UE in HD-FDD mode, if a downlink reception overlaps with aperiodic SRS with target spatial relation of the serving cell then the UE is allowed to postpone the uplink transmission.

The known condition for spatial relation associated to DL RS defined in clause 8.12A.2 is applied.

8.12A.5 RRC based spatial relation switch delay

If the target spatial relation associated to DL RS is known and UE is configured with uplink resources for transmission on target spatial relation, UE shall be able to transmit target periodic SRS with spatial relation of the serving cell on which periodic SRS with spatial relation reconfigured no later than slot n+ $T_{RRC_processing}$ /*NR slot length* +1 when *beamCorrespondenceWithoutUL-BeamSweeping* is set to 1.

Where

- Slot n is the last slot overlapping with the PDSCH carrying RRC activation command,
- $T_{RRC_processing}$ is the RRC processing delay defined in 36.331 [16] is the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the RRC processing delay defined in TS38.331 [2].

If the target spatial relation associated to DL RS is unknown and UE is configured with uplink resources for transmission on target spatial relation, UE shall be able to transmit target periodic SRS with spatial relation of the serving cell on which periodic SRS with spatial relation reconfigured no later than slot n+ $T_{RRC_processing}$ /*NR slot length* + $T_{L1\text{-}RSRP}$ +1 when *beamCorrespondenceWithoutUL-BeamSweeping* is set to 1.

Where

- Slot n is the last slot overlapping with the PDSCH carrying RRC activation command,
- $T_{RRC_processing}$ is the RRC processing delay defined in 36.331 [16] is the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the RRC processing delay defined in TS38.331 [2].
- $T_{L1\text{-}RSRP}$ is defined in clause 8.12A.3

For RedCap UE in HD-FDD mode, if a downlink reception overlaps with target periodic SRS with spatial relation of the serving cell with periodic SRS with spatial relation reconfigured then the UE is allowed to postpone the uplink transmission.

8.12C Uplink spatial relation switch delay for satellite access

UL Spatial relation switch delay requirements do not apply for satellite access in FR1.

8.12C.1 Void

8.12C.2 Void

8.12C.3 Void

8.12C.4 Void

8.12C.5 Void

8.13 UE-specific CBW change

8.13.1 Introduction

The requirements in this clause apply for a UE receives reconfiguration of *offsetToCarrier* or *carrierBandwidth* to change channel bandwidth.

8.13.2 UE-specific CBW change delay

After the UE receives RRC reconfiguration involving *offsetToCarrier* or *carrierBandwidth* change on the old CBW, UE shall be able to receive PDSCH/PDCCH on the DL BWP with BWP ID firstActiveDownlinkBWP-Id or transmit PUSCH on the UL BWP with BWP ID firstActiveUplinkBWP-Id of the new CBW right after a time duration of $\frac{T_{RRCprocessingDelay}+T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$ slots which begins from the beginning of DL slot n, where

DL slot n is the last slot overlapping with the PDSCH containing the RRC command, and

$T_{RRCprocessingDelay}$ is the length of the RRC procedure delay in millisecond as defined in clause 11.2 in TS 36.331 [6] is the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the length of the RRC procedure delay in millisecond as defined in clause 12 in TS 38.331 [2], and

$T_{CBWchangeDelayRRC} = 6ms$ is the time used by the UE to perform CBW change.

The UE is not required to transmit UL signals or receive DL signals during the above defined time duration $\frac{T_{RRCprocessingDelay}+T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$ on the cell where UE-specific CBW change occurs. When $T_{HARQ} > T_{RRCprocessingDelay}$ a longer switching delay is allowed. Where T_{HARQ} is the time between DL data transmission and acknowledgement as specified in TS 38.213 [3].

8.13A UE-specific CBW change for RedCap

8.13A.1 Introduction

The requirements in this clause apply for a RedCap UE receives reconfiguration of *offsetToCarrier* or *carrierBandwidth* to change channel bandwidth.

8.13A.2 UE-specific CBW change delay

After the UE receives RRC reconfiguration involving *offsetToCarrier* or *carrierBandwidth* change on the old CBW, UE shall be able to receive PDSCH/PDCCH on an active DL BWP or transmit PUSCH on an active UL BWP of the new CBW right after a time duration of $\frac{T_{RRCprocessingDelay}+T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$ slots which begins from the beginning of DL slot n, where

DL slot n is the last slot overlapping with the PDSCH containing the RRC command, and

$T_{RRCprocessingDelay}$ is the length of the RRC procedure delay in millisecond as defined in clause 11.2 in TS 36.331 [6] is the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the length of the RRC procedure delay in millisecond as defined in clause 12 in TS 38.331 [2], and

$T_{CBWchangeDelayRRC} = 6ms$ is the time used by the UE to perform CBW change.

The UE is not required to transmit UL signals or receive DL signals during the above defined time duration $\frac{T_{RRCprocessingDelay}+T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$ on the cell where UE-specific CBW change occurs. When $T_{HARQ} > T_{RRCprocessingDelay}$ a longer switching delay is allowed. Where T_{HARQ} is the time between DL data transmission and acknowledgement as specified in TS 38.213 [3].

8.13C UE-specific CBW change for satellite access

Editor's note: Applicability of frequency range, CA, DA, duplex mode, inter-RAT measurement, etc is subject to updates/changes based on the scope of the corresponding WID.

Editor's note: Terminology will be further clarified and selected between, e.g. NTN and satellite access, based on further agreements.

8.13C.1 Introduction

The requirements in this clause apply for a UE receives reconfiguration of *offsetToCarrier* or *carrierBandwidth* to change channel bandwidth.

8.13C.2 UE-specific CBW change delay

After the UE receives RRC reconfiguration involving *offsetToCarrier* or *carrierBandwidth* change on the old CBW, UE shall be able to receive PDSCH/PDCCH on an active DL BWP or transmit PUSCH on an active UL BWP of the new CBW right after a time duration of $\frac{T_{RRCprocessingDelay}+T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$ slots which begins from the beginning of DL slot n, where

DL slot n is the last slot containing the RRC command, and

$T_{RRCprocessingDelay}$ is the length of the RRC procedure delay in millisecond as defined in clause 12 in TS 38.331 [2], and

$T_{CBWchangeDelayRRC} = 6ms$ is the time used by the UE to perform CBW change.

The UE is not required to transmit UL signals or receive DL signals during the above defined time duration $\frac{T_{RRCprocessingDelay}+T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$ on the cell where UE-specific CBW change occurs. When $T_{HARQ} > T_{RRCprocessingDelay}$ a longer switching delay is allowed. Where T_{HARQ} is the time between DL data transmission and acknowledgement as specified in TS 38.213 [3].

8.14 Pathloss reference signal switching delay

8.14.1 Introduction

The requirements in this clause apply for pathloss reference signal activated or updated on serving cell in MR-DC or standalone NR in clause 7.1.1 in TS 38.213 [3].

UE shall complete the switch of pathloss reference signal within the delay defined in this clause.

8.14.2 Known conditions for pathloss reference signal

The pathloss reference signal is known if the following conditions are met during the period between the last transmission of the RS resource used for L1-RSRP measurement reporting and the completion of pathloss reference signal switch, where the RS resource is the target pathloss reference signal or QCLed (with Type D) to the target pathloss reference signal.

- Pathloss reference signal switch command is received within 1280 ms upon the last transmission of the RS resource for beam reporting or measurement
- The UE has sent at least 1 L1-RSRP report for the target pathloss reference signal before the pathloss reference signal switch command
- The target pathloss reference signal remains detectable during the pathloss reference signal switching period
  - SNR of the target pathloss reference signal≥-3dB
- The associated SSBs with the target pathloss reference signal remain detectable during the pathloss reference signal switching period
  - SNR of the associated SSB ≥-3dB

Otherwise, the pathloss reference signal is unknown.

8.14.3 MAC-CE based pathloss reference signal switch delay

The requirements in this clause apply for a UE to update a pathloss reference signal by MAC-CE for PUCCH, PUSCH, semi-persistent SRS and aperiodic SRS.

If the target pathloss reference signal is known, upon receiving PDSCH carrying MAC-CE activation in slot n, UE shall be able to apply the target pathloss reference signal of the serving cell on which pathloss reference signal switch occurs no later than the slot $n + T_{HARQ} + 3\mathrm{N}_{\mathrm{slot}}^{\mathrm{subframe},\mu} + \mathrm{NM} * \left\lceil \frac{5 * T_{target_PL-RS} + 2\mathrm{ms}}{NR\ slot\ length} \right\rceil$. The UE shall be able to apply old pathloss reference signals until the slot $n + T_{HARQ} + 3\mathrm{N}_{\mathrm{slot}}^{\mathrm{subframe},\mu}$. Where

- T_{HARQ} is the timing between pathloss reference MAC-CE activation command and acknowledgement as specified in TS 38.321 [7].
- NM = 1, if the target PL-RS is not maintained by the UE, 0 otherwise.
- T_{target_PL-RS} is the periodicity of the target pathloss reference signal which would be SSB or NZP CSI-RS.

Note: longer application time is expected if measurement sample is not available due to measurement gap, DRX or other UE activities.

Note: longer application time is expected if the pathloss reference signal is unknown.

8.14C Pathloss reference signal switching delay for satellite access

Editor's note: Applicability of frequency range, CA, DA, duplex mode, inter-RAT measurement, etc is subject to updates/changes based on the scope of the corresponding WID.

Editor's note: Terminology will be further clarified and selected between, e.g. NTN and satellite access, based on further agreements.

8.14C.1 Introduction

The requirements in this clause apply for pathloss reference signal activated or updated on PCell in clause 7.1.1 in TS 38.213 [3] and the UE is configured with only PCell, which is served by satellite access node (SAN).

UE shall complete the switch of pathloss reference signal within the delay defined in this clause.

8.14C.2 Known conditions for pathloss reference signal

The pathloss reference signal is known if the following conditions are met during the period between the last transmission of the RS resource used for L1-RSRP measurement reporting and the completion of pathloss reference signal switch, where the RS resource is the target pathloss reference signal or QCLed (with Type D) to the target pathloss reference signal.

- Pathloss reference signal switch command is received within 1280 ms upon the last transmission of the RS resource for beam reporting or measurement
- The UE has sent at least 1 L1-RSRP report for the target pathloss reference signal before the pathloss reference signal switch command
- The target pathloss reference signal remains detectable during the pathloss reference signal switching period
  - SNR of the target pathloss reference signal≥-3dB
- The associated SSBs with the target pathloss reference signal remain detectable during the pathloss reference signal switching period
  - SNR of the associated SSB ≥-3dB

Otherwise, the pathloss reference signal is unknown.

8.14C.3 MAC-CE based pathloss reference signal switch delay

The requirements in this clause apply for a UE to update a pathloss reference signal by MAC-CE for PUCCH, PUSCH, semi-persistent SRS and aperiodic SRS.

If the target pathloss reference signal is known, upon receiving PDSCH carrying MAC-CE activation in slot n, UE shall be able to apply the target pathloss reference signal of the serving cell on which pathloss reference signal switch occurs no later than the slot $n + T_{HARQ} + 3\mathrm{N}_{\mathrm{slot}}^{\mathrm{subframe},\mu} + \mathrm{NM} * \left\lceil \frac{5 * T_{target_PL-RS} + 2\mathrm{ms}}{NR\ slot\ length} \right\rceil$. The UE shall be able to apply old pathloss reference signals until the slot $n + T_{HARQ} + 3\mathrm{N}_{\mathrm{slot}}^{\mathrm{subframe},\mu}$. Where

- T_{HARQ} is the timing between pathloss reference MAC-CE activation command and acknowledgement as specified in TS 38.321 [7].
- NM = 1, if the target PL-RS is not maintained by the UE, 0 otherwise.
- T_{target_PL-RS} is the periodicity of the target pathloss reference signal which would be SSB or NZP CSI-RS.

Note: longer application time is expected if measurement sample is not available due to measurement gap, DRX or other UE activities.

Note: longer application time is expected if the pathloss reference signal is unknown.

8.15 Active downlink TCI state switching delay for unified TCI

8.15.1 Introduction

The requirements in this clause apply for a UE configured with *DLorJoint-TCIState* configurations for DL channels on a serving cell. Further the requirements also apply for all the list of serving cells in *simultaneousU-TCI-UpdateList1*, *simultaneousU-TCI-UpdateList2*, *simultaneousU-TCI-UpdateList3*, *simultaneousU-TCI-UpdateList4* in MR-DC or standalone NR provided all serving cells in the list are configured with the same serving cell and BWP in *unifiedTCI-StateRef-r17*. UE shall complete the switch of active downlink TCI state within the delay defined in this clause.

When the target DL TCI state refers to an additional PCI different from the serving cell PCI in which this DL TCI-State is configured, the requirements in this clause are applicable provided that following conditions are met:

- Active BWP of the serving cell and a cell with the additional PCI are the same
- Center frequency, SCS and SFN offset of a cell with the additional PCI are as the same as serving cell - The cell with the additional PCI is known to the UE.

A cell with the additional PCI is known if the following conditions are met:

- During the last 5s before L1-RSRP measurement is configured, the UE has sent a valid L3 measurement report for the cell with the additional PCI
- Timing offset between serving cell and the cell with the additional PCI is within CP of the corresponding SCS

Otherwise, the cell with the additional PCI is unknown.

8.15.2 Known conditions for downlink TCI state

The downlink TCI state is known if the following conditions are met:

- During the period from the last transmission of the RS resource used for the L1-RSRP measurement reporting for the target downlink TCI state to the completion of active downlink TCI state switch, where the RS resource for L1-RSRP measurement is the RS in target downlink TCI state or QCLed to the target downlink TCI state
  - Downlink TCI state switch command is received within 1280 ms upon the last transmission of the RS resource for beam reporting or measurement
  - The UE has sent at least 1 L1-RSRP report for the target downlink TCI state before the downlink TCI state switch command
  - The target downlink TCI state remains detectable during the downlink TCI state switching period
  - The SSB associated with the downlink TCI state remain detectable during the downlink TCI switching period
    - SNR of the downlink TCI state $\geq$ -3dB
    - The SSB can be associated with either the serving cell PCI or a PCI different from serving cell PCI.

Otherwise, the downlink TCI state is unknown.

8.15.3 MAC-CE based downlink TCI state switch delay

The requirements in this clause shall apply for DL TCI state switch using separate DL TCI state or joint TCI state of unified TCI state switch framework.

In case that source RS in DL TCI state or joint TCI state is associated with a PCI different from that of the serving cell, the requirements in this clause shall apply if the cell with different PCI satisfies the known cell condition defined in 8.15.1. If the known cell condition is not met, longer delay may be expected.

In case of joint TCI state switch, if the target PL-RS is not maintained, UE is not expected to receive on DL based on the target TCI state before UE completes the DL and UL TCI state switch.

If the target TCI state is known, upon receiving PDSCH carrying MAC-CE activation command in slot n, UE shall be able to receive UE-dedicated PDCCH/PDSCH with target TCI state of the serving cell on which TCI state switch occurs at the first slot that is after slot n+ T_{HARQ} + $3N_{slot}^{subframe,\mu}$+ TO_k*($T_{first\text{-}SSB}$ + $T_{SSB\text{-}proc}$) / *NR slot length*. The UE shall be able to receive UE-dedicated PDCCH/PDSCH with the old TCI state until slot n+ T_{HARQ} + $3N_{slot}^{subframe,\mu}$ where T_{HARQ} (in slot) is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [3];

- $T_{first\text{-}SSB}$ is time to first SSB transmission after MAC CE command is decoded by the UE; The SSB shall be the QCL-TypeA or QCL-TypeC to target TCI state
- $T_{SSB\text{-}proc}$ = 2 ms;
- TO_k = 1 if target TCI state is not in the active TCI state list for PDSCH/PDCCH, 0 otherwise.

If the target TCI state is unknown, upon receiving PDSCH carrying MAC-CE activation command in slot n, UE shall be able to receive UE-dedicated PDCCH/PDSCH with target TCI state of the serving cell on which TCI state switch occurs at the first slot that is after slot n+ T_{HARQ} +$3N_{slot}^{subframe,\mu}$ + ($T_{L1\text{-}RSRP}$ +TO_{uk}*($T_{first\text{-}SSB}$+ $T_{SSB\text{-}proc}$)) / *NR slot length*. The UE shall be able to receive UE-dedicated PDCCH/PDSCH with the old TCI state until slot n+ T_{HARQ} + $3N_{slot}^{subframe,\mu}$.

Where

- $T_{L1\text{-}RSRP}$ = 0 in FR1 or when the TCI state switching not involving QCL-TypeD in FR2. Otherwise,
- $T_{L1\text{-}RSRP}$ is the time for Rx beam refinement in FR2, defined as
- $T_{L1\text{-}RSPR_Measurement_Period_SSB}$ for SSB as specified in clause 9.5.4.1,
  - with the assumption of M=1
  - with T_{Report} = 0
- $T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS}$ for CSI-RS as specified in clause 9.5.4.2
  - CSI-RS based L1-RSRP measurement only apply for TCI state switch when source RS is associated with serving cell
  - configured with higher layer parameter *repetition* set to ON
  - with the assumption of M=1 for periodic CSI-RS
  - for aperiodic CSI-RS if number of resources in resource set at least equal to *MaxNumberRxBeam*
  - with T_{Report} = 0
- TO_{uk} = 1 for CSI-RS based L1-RSRP measurement, and 0 for SSB based L1-RSRP measurement when TCI state switching involves QCL-TypeD
- TO_{uk} = 1 when TCI state switching involves other QCL types only
- $T_{first\text{-}SSB}$ is time to first SSB transmission after L1-RSRP measurement when TCI state switching involves QCL-TypeD;
- $T_{first\text{-}SSB}$ is time to first SSB transmission after MAC CE command is decoded by the UE for other QCL types;
- The SSB shall be the QCL-TypeA or QCL-TypeC to target TCI state

8.15.4 DCI based downlink TCI state switch delay

When a UE is configured with the higher layer parameter with *DLorJointTCIState* or *UL-TCIState*, activated with TCI states for downlink transmission by MAC CE indication of more than one codepoints, and receives DCI format 1_1/1_2 with or without DL assignment providing indicated TCI-State or TCI state pair in the active TCI list for a CC, the UE transmits a PUCCH with HARQ-ACK information corresponding to the DCI carrying the TCI-State indication.

If the target TCI state is known, the downlink TCI switching to the indicated DL TCI state or joint TCI state in the DCI format shall be completed starting from the first slot that is at least *BeamAppTime-r17* symbols after the last symbol of the PUCCH carrying HARQ-ACK in response to the DCI triggering TCI state activation. The first slot and the *BeamAppTime-r17* symbols are both determined on the carrier with the smallest SCS among the carrier(s) applying the beam indication. The value of *BeamAppTime-r17* is defined in TS 38.331 [2]. The known condition for TCI state defined in clause 8.15.2 is applied.

8.15.5 Active Downlink TCI state list update delay

The requirements specified in this clause are applicable if

- higher layer configuration '*unifiedTCI-StateType-r17*' is set to '*separate*', and a MAC CE activates more than one target separate TCIs, and at least one DL TCI is included, or
- higher layer configuration '*unifiedTCI-StateType-r17*' is set to '*joint*', and a MAC CE activates more than one target joint TCI.

If all the target TCI states in the active TCI state list are known, upon receiving PDSCH carrying MAC-CE active TCI state list update at slot n, UE shall be able to receive PDCCH or PDSCH with the new target TCI states at the first slot that is after

$$n + T_{HARQ} + 3N_{slot}^{subframe,\mu} + TO_k*(T_{first\text{-}SSB_List} + T_{SSB\text{-}proc}) / \textit{NR slot length}.$$

If a subset of the target TCI states in the active TCI state list are unknown, upon receiving PDSCH carrying MAC-CE active TCI state list update at slot n, UE shall be able to receive UE-dedicated PDCCH or PDSCH with the new target TCI states at the first slot that is after

$$n+ T_{HARQ} + 3N_{slot}^{subframe,\mu} + (T_{L1\text{-}RSRP_list} + TO_{uk}*(T_{first\text{-}SSB_List}+ T_{SSB\text{-}proc})) / \textit{NR slot length}.$$

If all target TCI states in the active TCI state list are unknown, the requirements specified in this clause are not applicable.

Where

- $T_{L1\text{-}RSRP_List}$ = is the longest L1 measurement time ($T_{L1\text{-}RSRP}$) of the source RS among the unknown target TCI states , where $T_{L1\text{-}RSRP}$ is specified in clause 8.15.3
- If the number of cells associated with the target TCI states in the active TCI list is 2, and time to first SSBs associated to the TCIs are overlapped in FR2,
- $T_{first\text{-}SSB_List} = T_{first\text{-}SSB_SC} + \min(T_{SSB_SC}, T_{SSB_CDP})$.
- If the number of cells associated with the target TCI states in the active TCI list is 2, and time to first SSBs associated to the TCIs are not overlapped in FR1 or FR2,
- $T_{first\text{-}SSB_List} = \max(T_{first\text{-}SSB_SC}, T_{first\text{-}SSB_CDP})$
- Otherwise,
- $T_{first\text{-}SSB_List} = T_{first\text{-}SSB_SC}$.
- T_{SSB_SC} is the SSB periodicity of serving cell.
- T_{SSB_CDP} is the SSB periodicity of cell with different PCI from serving cell.
- $T_{first\text{-}SSB_SC}$ is the $T_{first\text{-}SSB}$ from serving cell
- $T_{first\text{-}SSB_CDP}$ is the $T_{first\text{-}SSB}$ from cell with different PCI from serving cell.
- T_{HARQ}, $T_{first\text{-}SSB}$, $T_{SSB\text{-}proc}$, TO_k, TO_{uk} are defined in clause 8.15.3. T_{SSB} is the SSB periodicity.

When UE receives PDSCH carrying MAC-CE for active TCI state list update, and

- higher layer configuration '*unifiedTCI-StateType-r17*' is set to '*joint*', or

- higher layer configuration '*unifiedTCI-StateType-r17*' is set to '*separate*', while the target TCI list comprises at least one DL TCIs and at least one UL TCIs,

- UE is not expected to receive on DL based on the target TCI state before UE completes the DL and UL TCI state list update.

8.16 Active uplink TCI state switching delay for unified TCI

8.16.1 Introduction

The requirements in this clause apply for a UE configured with *DLorJoint-TCIState* (if unifiedTCI-StateType is indicated as *Joint*) or *UL-TCIState* configurations for UL channels/signals on a serving cell. Further the requirements also apply for all the list of serving cells in *simultaneousU-TCI-UpdateList1, simultaneousU-TCI-UpdateList2, simultaneousU-TCI-UpdateList3, simultaneousU-TCI-UpdateList4* in MR-DC or standalone NR provided all serving cells in the list are configured with the same serving cell and BWP in *unifiedTCI-StateRef-r17*. There is no requirement when the UE is requested to switch to a TCI state with the higher layer parameter *UL-TCIState* associated to SRS. UE shall complete the switch of active uplink TCI state within the delay defined in this clause when the UE is requested to switch to a TCI state with the higher layer parameter *DLorJointTCIState* or *UL-TCIState* associated to a DL RS.

PL-RS may be associated with or included in UL TCI state or joint TCI state. The requirements in this clause shall apply if the following conditions are met:

- PL-RS is identical to source RS in UL TCI state or joint TCI state

- PL-RS and source RS in UL TCI state or joint TCI state are QCL-Type D

When the target UL TCI state refers to an additional PCI different from serving cell PCI in which this UL TCI state is configured, the requirements in this clause are applicable provided that the following conditions are met:

- Active BWP of the serving cell and a cell with the additional PCI are the same

-Center frequency, SCS and SFN offset of a cell with the additional PCI are as the same as serving cell

- The cell with the additional PCI is known to the UE.

A cell with the additional PCI is known if the following conditions are met:

- During the last 5s before L1-RSRP measurement is configured, the UE has sent a valid L3 measurement report for the cell with the additional PCI

- Timing offset between serving cell and the cell with the additional PCI is within CP of the corresponding SCS

- The SSB from the cell with the additional PCI remains detectable according to the cell identification requirements specified in clause 9.2

Otherwise, the cell with the additional PCI is unknown.

8.16.2 Known conditions for uplink TCI state

The uplink TCI state is known if the following conditions are met:

- During the period from the last transmission of the RS resource used for the L1-RSRP measurement reporting for the target uplink TCI state to the completion of active uplink TCI state switch, where the RS resource for L1-RSRP measurement is the RS in target uplink TCI state or QCLed to the target uplink TCI state

  - Uplink TCI state switch command is received within 1280 ms upon the last transmission of the RS resource for beam reporting or measurement

  - The UE has sent at least 1 L1-RSRP report for the target uplink TCI state before the uplink TCI state switch command

- The RS configured in target uplink TCI state remains detectable during the uplink TCI state switching period
  - SNR of the RS configured in target uplink TCI state ≥ -3dB
- The target uplink TCI state remains detectable during the uplink TCI state switching period
- The SSB associated with the uplink TCI state remain detectable during the uplink TCI switching period
  - SNR of the uplink TCI state ≥ -3dB
  - The SSB can be associated with either the serving cell PCI or a PCI different from serving cell PCI.

Otherwise, the uplink TCI state is unknown.

8.16.3 MAC-CE based uplink TCI state switch delay

The requirements in this clause shall apply for UL TCI state switch using separate UL TCI state or joint TCI state of unified TCI state switch framework.

In case that source RS in UL TCI state or joint TCI state is associated with a PCI different from that of the serving cell, the requirements in this clause shall apply if the cell with different PCI satisfies the known cell condition defined in 8.16.1. If the known cell condition is not met, longer delay may be expected.

In case of joint TCI state switch, UE is not expected to transmit on UL before UE completes the DL and UL TCI state switch.

For separate UL TCI state switch or joint TCI state switch for PUCCH or PUSCH, or semi-persistent/aperiodic/periodic SRS, when *beamCorrespondenceWithoutUL-BeamSweeping* is set to 1, upon receiving PDSCH carrying MAC-CE activation command in slot n on serving cell,

- The UE shall be able to transmit uplink signal with the target TCI state in the slot $n+T_{HARQ} + 3N_{slot}^{subframe,\mu} + NM* (T_{first_target\text{-}PL\text{-}RS} + 4*T_{target_PL\text{-}RS} + 2ms) / \textit{NR slot length}$.
- If target TCI state is unknown,
  - The UE shall be able to transmit uplink signal with the target TCI state in the slot $n+T_{HARQ} + 3N_{slot}^{subframe,\mu} + (T_{L1\text{-}RSRP} + T_{first_target\text{-}PL\text{-}RS} + 4*T_{target_PL\text{-}RS} + 2ms) / \textit{NR slot length}$.

Where,

- T_{HARQ} (in slot) is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [3].
- NM = 1, if the target PL-RS is not maintained by the UE, 0 otherwise.
- [- PL-RS is maintained provided:
  - the target PL-RS is associated with or included in the UL or joint TCI states in the active TCI list for PUSCH/PUCCH/SRS transmissions
  - There are no more than 4 different RS configured as PL-RS per serving cell among all active UL (or joint) TCI states for PUSCH/PUCCH/SRS transmissions
- Conditions for known path loss reference signal in section 8.14.2 are fulfilled.Note: The requirements specified in this clause are not applicable if more than 4 different RSs are configured as PL-RS per serving cell among all active UL (or joint) TCI states.]
- $T_{first_target\text{-}PL\text{-}RS}$ is time to first pathloss RS transmission after L1-RSRP measurement when target TCI state is unknown.
- $T_{first_target\text{-}PL\text{-}RS}$ is time to first pathloss RS transmission after MAC CE command is decoded by the UE for known TCI State.
- $T_{target_PL\text{-}RS}$ is the periodicity of the target pathloss reference signal which would be SSB or NZP CSI-RS when PL-RS is associated with serving cell

- $T_{target_PL\text{-}RS}$ is the periodicity of the target pathloss reference signal which would be SSB when PL-RS is associated with PCI different from serving cell
- $T_{L1\text{-}RSRP}$ is the time for Rx beam refinement in FR2, defined as
  - $T_{L1\text{-}RSPR_Measurement_Period_SSB}$ for SSB as specified in clause 9.5.4.1,
    - with the assumption of M=1
    - with $T_{Report} = 0$
  - $T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS}$ for CSI-RS as specified in clause 9.5.4.2
    - CSI-RS based L1-RSRP measurement only apply for TCI state switch when source RS is associated with serving cell
    - configured with higher layer parameter *repetition* set to ON
    - with the assumption of M=1 for periodic CSI-RS
    - for aperiodic CSI-RS if number of resources in resource set at least equal to *MaxNumberRxBeam*
    - with $T_{Report} = 0$

Editor note: when PL-RS is SSB in FR2, the delay requirement is FFS.

- The UE shall be able to transmit with the old UL TCI state until slot n+ $T_{HARQ} + 3N_{slot}^{subframe,\mu}$.

8.16.4 DCI based uplink TCI state switch delay

When a UE is configured with the higher layer parameter with *DLorJointTCIState* or *UL-TCIState*, activated with TCI states for uplink transmission by MAC CE indication of more than one codepoints, and receives DCI format 1_1/1_2 with or without DL assignment providing indicated TCI-State or TCI state pair in the active TCI list for a CC, the UE transmits a PUCCH with HARQ-ACK information corresponding to the DCI carrying the TCI-State indication.

The requirements in this clause are applicable only if the DCI format indicating UL TCI state or joint TCI state switch is received by UE when

- target TCI state is known, and
- target TCI state is in active TCI state list, and
- target PL-RS is maintained as defined in clause 8.16.3

If the target TCI state is known, the uplink TCI switching to the indicated UL TCI state or joint TCI state in the DCI format shall be completed starting from the first slot that is at least *BeamAppTime-r17* symbols after the last symbol of the PUCCH carrying HARQ-ACK in response to the DCI triggering TCI state activation. The first slot and the *beamAppTime-r17* symbols are both determined on the carrier with the smallest SCS among the carrier(s) applying the beam indication. The value of *beamAppTime-r17* is defined in TS 38.331 [2]. The known condition for TCI state defined in clause 8.16.2 is applied.

If a PL-RS is associated with or included in UL TCI state or joint TCI state, the UL TCI switching and PL-RS switching shall be completed at the same time.

8.16.5 Active Uplink TCI state list update delay

The requirements specified in this clause are applicable if

- higher layer configuration '*unifiedTCI-StateType-r17*' is set to '*separate*', and a MAC CE activates more than one target separate TCIs, and at least one UL TCI is included, or

- higher layer configuration '*unifiedTCI-StateType-r17*' is set to '*joint*', and a MAC CE activates more than one target joint TCI.

If all the target TCI states in the active TCI state list are known, upon receiving PDSCH carrying MAC-CE active TCI state list update at slot n, UE shall be able to transmit PUCCH, PUSCH or SRS with the new target TCI states at the first slot that is after

$$n + T_{HARQ} + 3N_{slot}^{subframe,\mu} + NM * (T_{first_target\text{-}PL\text{-}RS_List} + 4 * T_{target_PL\text{-}RS_List} + 2ms) / \textit{NR slot length},$$

If a subset of target TCI states in the active TCI state list are unknown, upon receiving PDSCH carrying MAC-CE active TCI state list update at slot n, UE shall be able to transmit PUCCH, PUSCH or SRS with the new target TCI states at the first slot that is after

$$n+T_{HARQ} + 3N_{slot}^{subframe,\mu} + (T_{L1\text{-}RSRP_List} + T_{first_target\text{-}PL\text{-}RS_List} + 4*T_{target_PL\text{-}RS_List} + 2ms) / \textit{NR slot length}$$

If all target TCI states in the active TCI state list are unknown, the requirements specified in this clause are not applicable.

Where

- If all TCIs are known,
- if the target PL-RS associated with or included in any UL TCI is not maintained, NM = 1; Where maintained PL-RS is defined in clause 8.16.3
- if a subset of target TCI states in the active TCI state list are unknown,
- $T_{L1\text{-}RSRP_List}$ = is the longest L1 measurement time ($T_{L1\text{-}RSRP}$) of the source RS among the unknown target TCI states , where $T_{L1\text{-}RSRP}$ is specified in clause 8.16.3
- if the number of cells associated with the target TCI states in the active TCI list is 2, and time to first PL-RS associated to the TCIs are overlapped in FR2,
- $T_{first_target\text{-}PL\text{-}RS_List} = T_{first_target\text{-}PL\text{-}RS_SC} + \min(T_{target\text{-}PL\text{-}RS_SC}, T_{target\text{-}PL\text{-}RS_CDP})$;
- $T_{target\text{-}PL\text{-}RS_List} = 2 * T_{target\text{-}PL\text{-}RS_SC}$, if $T_{target\text{-}PL\text{-}RS_SC} = T_{target\text{-}PL\text{-}RS_CDP}$
- $T_{target\text{-}PL\text{-}RS_List} = \max(T_{target\text{-}PL\text{-}RS_SC}, T_{target\text{-}PL\text{-}RS_CDP})$, if $T_{target\text{-}PL\text{-}RS_SC} \neq T_{target\text{-}PL\text{-}RS_CDP}$
- if the number of cells associated with the target TCI states in the active TCI list is 2, and time to first PL-RS associated to the TCIs are not overlapped in FR2,
  - $T_{first_target\text{-}PL\text{-}RS_List} = \max(T_{first_target\text{-}PL\text{-}RS_SC}, T_{first_target\text{-}PL\text{-}RS_SC})$;
  - $T_{target\text{-}PL\text{-}RS_List} = \max(T_{target\text{-}PL\text{-}RS_SC}, T_{target\text{-}PL\text{-}RS_CDP})$
- Otherwise,
  - $T_{first_target\text{-}PL\text{-}RS_List} = T_{first_target\text{-}PL\text{-}RS_SC}$
  - $T_{target\text{-}PL\text{-}RS_List} = T_{target\text{-}PL\text{-}RS_SC}$.
  - $T_{first_target\text{-}PL\text{-}RS_SC}$ is $T_{first_target\text{-}PL\text{-}RS}$ for serving cell
  - $T_{first_target\text{-}PL\text{-}RS_CDP}$ is $T_{first_target\text{-}PL\text{-}RS}$ for cell with different PCI from serving cell
  - $T_{target\text{-}PL\text{-}RS_SC}$ is $T_{target\text{-}PL\text{-}RS}$ for serving cell
- $T_{target\text{-}PL\text{-}RS_CDP}$ is $T_{target\text{-}PL\text{-}RS}$ for cell with different PCI from serving cell- T_{HARQ}, $T_{first_target\text{-}PL\text{-}RS}$, $T_{target\text{-}PL\text{-}RS}$ are defined in clause 8.16.3.

Note: The requirements specified in this clause do not apply if more than 4 different RSs are configured as PL-RS per serving cell among all active UL (or joint) TCI states.

When UE receives PDSCH carrying MAC-CE for active TCI state list update, and

- higher layer configuration '*unifiedTCI-StateType-r17*' is set to '*joint*', or

- higher layer configuration '*unifiedTCI-StateType-r17*' is set to '*separate*', while the target TCI list comprises at least one DL TCIs and at least one UL TCIs,

UE is not expected to transmit on UL based on the target TCI before UE completes the DL and UL TCI list update.

[For active UL or joint TCI state, it is FFS if a UE is expected to track timing or frequency derived from DL-RS associated with a source RS in UL TCI state or joint TCI that is not in DL TCI state list.]

8.17 SCG Activation and Deactivation Delay

8.17.1 Introduction

This clause defines requirements for the delay within which the UE shall be able to activate one SCG and deactivate on SCG.

The requirements shall apply for NR-DC with an NR PCell, PSCell or SCell.

8.17.2 SCG Activation Delay Requirement

The requirements in this clause shall apply for the UE configured with one deactivated SCG in NR-DC and when PScell in one SCG is being activated.

The delay within which the UE shall be able to activate the deactivated SCG depends upon the specified conditions.

Upon receiving SCG activation command in slot *n*, the UE shall be capable to transmit PRACH preamble or PUCCH or PUSCH towards PSCell no later than in slot $n + \frac{T_{activation_time}}{NR\ slot\ length}$,

where:

$T_{activation_time} = T_{RRC_delay} + T_{processing} + T_{search} + T_{\Delta} + T_{IU} + 2$ ms

T_{RRC_delay} is the RRC procedure delay as specified in TS 38.331 [2].

$T_{processing}$ is the SW processing time needed by UE, including RF warm up period. When PSCell is activated from deactivated state, if any PSCell parameter is modified, $T_{processing}$ = 20ms. Otherwise, $T_{processing}$ = 5 ms. T_{search} is the time for AGC settling and PSS/SSS detection.

T_{search} is the time for AGC settling and PSS/SSS detection.

For RACH based PSCell activation, if the target cell is a known NR FR2 PSCell, T_{search} = 0 ms. If the target cell is an unknown FR2 PSCell and Es/Iot $\geq$ -2 dB, then T_{search} = 24* T_{rs} ms.

For RACH-less based PSCell activation, if RLM and BFD are configured and TCI state is known, T_{search} = 0 ms if the target cell is a known FR2 PScell. There are no requirements if PSCell is unknown.

T_{Δ} is time for fine time tracking and acquiring full timing information of the target PSCell. T_{Δ} = 1*Trs ms.

T_{IU}: When RACH based PSCell activation is configured, it is the delay uncertainty in acquiring the first available PRACH occasion in the PSCell. T_{IU} is up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in Table 8.1-1 of TS 38.213 [3].

When RACH-less based PSCell activation is configured, it is the uncertainty in acquiring the first PUSCH transmission occasion [or SR on PUCCH].

Trs is the SMTC periodicity of the PSCell if the UE has been provided with an SMTC configuration for the target cell in SCG activation command, otherwise Trs is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with Trs = 5 ms assuming the SSB transmission periodicity is 5 ms. There is no requirement if the SSB transmission periodicity is not 5.

In FR2, the PSCell is known if it has been meeting the following conditions:

- During the last 5 seconds before the reception of the SCG activation command:
  - the UE has sent a valid measurement report for the PSCell being activated and
  - One of the SSBs measured from the PSCell being activated remains detectable according to the cell identification conditions specified in clause 9.3.
  - One of the SSBs measured from PSCell being activated also remains detectable during the PSCell activation delay $T_{activation_time}$ according to the cell identification conditions specified in clause 9.3.

otherwise it is unknown.

If the UE is configured to perform BFD while the SCG is deactivated

- The TCI state is known if the following conditions are met:
  - During the period from the PSCell deactivation to the completion of PSCell activation, while PSCell was deactivated,
  - UE has not detected beam failure
- Otherwise, the TCI state is unknown.

The PCell interruption specified in clause 8.2 is allowed only during the RRC reconfiguration procedure [2].

8.17.3 SCG Deactivation Delay Requirement

The requirements in this clause shall apply for a UE which is configured with at least PCell and PScell.

Upon receiving RRC-based SCG deactivation command in subframe *n*, the UE shall accomplish the deactivation actions specified in TS 38.331 [2] no later than in slot $n + \frac{T_{RRC_delay}}{NR\ slot\ length}$:

where

T_{RRC_delay} is the RRC procedure delay as specified in TS 38.331 [2].

The PCell interruption specified in clause 8.2 is allowed only during the RRC reconfiguration procedure [2].

8.18 TRP specific Link Recovery Procedures

8.18.1 Introduction

The UE shall assess the downlink radio link quality of a serving cell based on the reference signal provided in the two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$ as specified in TS 38.213 [3] in order to detect beam failure on:

- PCell in SA, NR-DC, or NE-DC operation mode,
- PSCell in NR-DC and EN-DC operation mode,
- SCell in SA, NR-DC, NE-DC or EN-DC operation mode.

The RS resource configurations in the two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$ on PCell or PSCell can be periodic CSI-RS resources and/or SSBs. RS resource configuration in the two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$ on SCell shall be periodic CSI-RS. UE is not required to perform beam failure detection outside the active DL BWP. UE is not required to meet the requirements in clause 8.18.2 and 8.18.3 if UE does not have configured sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$. UE is not required to perform beam failure detection on a deactivated SCell, and also not required to perform beam failure detection on resources which is implicitly configured for a deactivated SCell. UE is not required to perform beam failure detection on a SCell on which $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$ is not configured.

If *additionalPCIList* is configured for the serving cell, the SSBs in sets $\bar{q}_{0,1}$ and $\bar{q}_{1,1}$ can be associated to the same additional PCI other than serving cell PCI.

On each RS resource configuration in the two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$, the UE shall estimate the radio link quality and compare it to the threshold Q_{out_LR} for the purpose of accessing downlink radio link quality of the serving cell.

The threshold Q_{out_LR} is defined as the level at which the downlink radio level link of a given resource configuration on two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$ cannot be reliably received and shall correspond to the $BLER_{out}$ = 10% block error rate of a hypothetical PDCCH transmission. For SSB based beam failure detection, $Q_{out_LR_SSB}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 8.518.2.1-1. For CSI-RS based beam failure detection, $Q_{out_LR_CSI\text{-}RS}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 8.181.3.1-1.

Upon request the UE shall deliver configuration indexes from the two sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$as specified in TS 38.213 [3] , to higher layers, and the corresponding L1-RSRP measurement provided that the measured L1-RSRP is equal to or better than the threshold Q_{in_LR}, which is indicated by higher layer parameter *rsrp-ThresholdSSB*. The UE applies the Q_{in_LR} threshold to the L1-RSRP measurement obtained from an SSB. The UE applies the Q_{in_LR} threshold to the L1-RSRP measurement obtained for a CSI-RS resource after scaling a respective CSI-RS reception power with a value provided by higher layer parameter *powerControlOffsetSS*. The RS resource configurations in the two sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$ can be periodic CSI-RS resources or SSBs or both SSB and CSI-RS resources. UE is not required to perform candidate beam detection outside the active DL BWP. UE is not required to perform candidate beam detection on a SCell on which $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$ is not configured.

8.18.2 Requirements for TRP specific SSB based beam failure detection

8.18.2.1 Introduction

The requirements in this clause apply for each SSB resource in the set two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$ configured for a serving cell, provided that the SSB configured for beam failure detection is actually transmitted within the UE active DL BWP during the entire evaluation period specified in clause 8.18.2.2. The SSB(s) in set $\bar{q}_{0,1}$ can be associated with an additionalPCI other than serving cell PCI.

Table 8.18.2.1-1: PDCCH transmission parameters for beam failure instance

Attribute	Value for BLER
DCI format	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	8
Ratio of hypothetical PDCCH RE energy to average SSS RE energy	0dB
Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	0dB
Bandwidth (PRBs)	24
Sub-carrier spacing (kHz)	Same as the SCS of RMSI CORESET
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed

8.18.2.2 Minimum requirement

UE shall be able to evaluate whether the downlink radio link quality on the configured SSB resource in two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$ estimated over the last $T_{Evaluate_BFD_SSB}$ ms period becomes worse than the threshold $Q_{out_LR_SSB}$ within $T_{Evaluate_BFD_SSB}$ ms period.

The value of $T_{Evaluate_BFD_SSB}$ is defined in Table 8.18.2.2-1 for FR1.

The value of $T_{Evaluate_BFD_SSB}$ is defined in Table 8.18.2.2-2 for FR2 with scaling factor N=8

For FR1,

- $P = \frac{1}{1-\frac{T_{SSB}}{MGRP}}$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the SSB.

- P=1 when in the monitored cell there are no measurement gaps overlapping with any occasion of the SSB.

For FR2,

- $P = \frac{1}{1-\frac{T_{SSB}}{T_{SMTCperiod}}}$, when BFD-RS resource is not overlapped with measurement gap and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$).

- $P = P_{sharing\ factor}$, when the BFD-RS resource is not overlapped with measurement gap and the BFD-RS resource is fully overlapped with SMTC period ($T_{SSB} = T_{SMTCperiod}$).

- $P = \frac{1}{1-\frac{T_{SSB}}{MGRP}-\frac{T_{SSB}}{T_{SMTCperiod}}}$, when the BFD-RS resource is partially overlapped with measurement gap and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and

  - $T_{SMTCperiod} \neq$ MGRP or

  - $T_{SMTCperiod}$ = MGRP and $T_{SSB} < 0.5*T_{SMTCperiod}$

- $P = \frac{P_{sharing\ factor}}{1-\frac{T_{SSB}}{MGRP}}$, when the BFD-RS resource is partially overlapped with measurement gap and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and $T_{SMTCperiod}$ = MGRP and $T_{SSB} = 0.5*T_{SMTCperiod}$

- $P = \frac{1}{1-\frac{T_{SSB}}{T_{SMTCperiod}}}$, when the BFD-RS resource is partially overlapped with measurement gap (T_{SSB} <MGRP) and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with measurement gap.

- $P = \frac{P_{sharing\ factor}}{1-\frac{T_{SSB}}{MGRP}}$, when the BFD-RS resource is partially overlapped with measurement gap and the BFD-RS resource is fully overlapped with SMTC occasion ($T_{SSB} = T_{SMTCperiod}$) and SMTC occasion is partially overlapped with measurement gap ($T_{SMTCperiod}$ < MGRP)

- $P_{sharing\ factor}$ = 1, if the BFD-RS resource outside measurement gap is

  - not overlapped with the SSB symbols indicated by SSB-ToMeasure and 1 data symbol before each consecutive SSB symbols indicated by SSB-ToMeasure and 1 data symbol after each consecutive SSB symbols indicated by SSB-ToMeasure, given that SSB-ToMeasure is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and;

  - not overlapped with the RSSI symbols indicated by ss-RSSI-Measurement and 1 data symbol before each RSSI symbol indicated by ss-RSSI-Measurement and 1 data symbol after each RSSI symbol indicated by ss-RSSI-Measurement, given that ss-RSSI-Measurement is configured.

  - $P_{sharing\ factor}$ = 3, otherwise.

  where,

  If the high layer in TS 38.331 [2] signaling of *smtc2* is configured, $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc2*; Otherwise $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc1*. $T_{SMTCperiod}$ is the shortest SMTC period among all CCs in the same FR2 band, given the SMTC offset of all CCs in FR2 provided the same offset.

Longer evaluation period would be expected if the combination of BFD-RS resource, SMTC occasion and measurement gap configurations does not meet pervious conditions.

For either an FR1 or FR2 serving cell, longer BFD evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer BFD evaluation period would be expected during the period $T_{identify_CGI,E-UTRAN}$ when the UE is requested to decode an LTE CGI.

The values of P_{TRP} defined in table 8.18.2.2-2 is defined as 2, if SSB/CSI-RS resource in the two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$ are overlapped, else it is 1.

Table 8.18.2.2-1: Evaluation period $T_{Evaluate_BFD_SSB}$ for FR1

Configuration	$T_{Evaluate_BFD_SSB}$ (ms)
no DRX	$Max(50, Ceil(5 \times P) \times T_{SSB})$
DRX cycle ≤ 320ms	$Max(50, Ceil(7.5 \times P) \times Max(T_{DRX},T_{SSB}))$
DRX cycle > 320ms	$Ceil(5 \times P) \times T_{DRX}$
Note: T_{SSB} is the periodicity of SSB in the two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$. T_{DRX} is the DRX cycle length.	

Table 8.18.2.2-2: Evaluation period $T_{Evaluate_BFD_SSB}$ for FR2

Configuration	$T_{Evaluate_BFD_SSB}$ (ms)
no DRX	$Max(50, Ceil(5 \times P \times N*P_{TRP}) \times T_{SSB})$
DRX cycle ≤ 320ms	$Max(50, Ceil(7.5 \times P \times N*P_{TRP}) \times Max(T_{DRX},T_{SSB}))$
DRX cycle > 320ms	$Ceil(5 \times P \times N*P_{TRP}) \times T_{DRX}$
Note: T_{SSB} is the periodicity of SSB in the two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$. T_{DRX} is the DRX cycle length.	

8.18.2.3 Measurement restriction for SSB based beam failure detection

The UE is required to be capable of measuring SSB for BFD without measurement gaps. The UE is required to perform the SSB measurements with measurement restrictions as described in the following scenarios.

For FR1, when the SSB for BFD measurement is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for BFD measurement without any restriction;
- If SSB and CSI-RS have different SCS,
  - If UE supports *simultaneousRxDataSSB-DiffNumerology*, UE shall be able to measure the SSB for BFD measurement without any restriction.
  - If UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both SSB for BFD measurement and CSI-RS. Longer measurement period for SSB based BFD measurement is expected, and no requirements are defined.

For FR2, when the SSB for BFD measurement on one CC is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both SSB for BFD measurement and CSI-RS. Longer measurement period for SSB based BFD measurement is expected, and no requirements are defined. When the SSB and CSI-RS for BFD measurements are from different sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$, UE shall be able to perform measure both SSB and CSI-RS for BFD measurements.

For FR2, when the SSB for BFD measurement on one CC is in the same or adjacent OFDM symbol as SSB with a different PCI for RLM, CBD or L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both SSBs with the two different PCIs. Longer measurement period for SSB based BFD is expected, and no requirements are defined.

For FR2, if the network configures same or mixed numerology between SSB for BFD measurement on one FR2 band and CSI-RS for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement on the other FR2 band, UE shall be able to perform the related SSB based measurements in one band without any measurement restrictions on the other band, provided that UE is capable of independent beam management on this FR2 band pair.

8.18.3 Requirements for CSI-RS based beam failure detection

8.18.3.1 Introduction

The requirements in this clause apply for each CSI-RS resource in the two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$of resource configurations for a serving cell, provided that the CSI-RS resource(s) in two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$for beam failure detection are actually transmitted within the UE active DL BWP during the entire evaluation period specified in clause 8.18.3.2. UE is not expected to perform beam failure detection measurements on the CSI-RS configured for BFD if the CSI-RS is not QCL-ed, with QCL-TypeD when applicable, with the RS in the active TCI state of any CORESET configured in the UE active BWP.

Table 8.18.3.1-1: PDCCH transmission parameters for beam failure instance

Attribute	Value for BLER
DCI format	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	8
Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	0dB
Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	0dB
Bandwidth (PRBs)	48
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed

8.18.3.2 Minimum requirement

UE shall be able to evaluate whether the downlink radio link quality on the CSI-RS resource in two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$ estimated over the last $T_{Evaluate_BFD_CSI\text{-}RS}$ ms period becomes worse than the threshold $Q_{out_LR_CSI\text{-}RS}$ within $T_{Evaluate_BFD_CSI\text{-}RS}$ ms period.

The value of $T_{Evaluate_BFD_CSI\text{-}RS}$ is defined in Table 8.18.3.2-1 for FR1.

The value of $T_{Evaluate_BFD_CSI\text{-}RS}$ is defined in Table 8.18.3.2-2 for FR2 with N=1. The requirements of $T_{Evaluate_BFD_CSI\text{-}RS}$ apply provided that the CSI-RS for BFD is not in a resource set configured with repetition ON. The requirements shall not apply when the CSI-RS resource in the active TCI state of CORESET is the same CSI-RS resource for BFD and the TCI state information of the CSI-RS resource is not given, wherein the TCI state information means QCL Type-D to SSB for L1-RSRP or CSI-RS with repetition ON.

For FR1,

- $P = \frac{1}{1-\frac{T_{CSI-RS}}{MGRP}}$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the CSI-RS.
- P = 1 when in the monitored cell there are no measurement gaps overlapping with any occasion of the CSI-RS.

For FR2,

- P = 1, when the BFD-RS resource is not overlapped with measurement gap and also not overlapped with SMTC occasion.
- $P = \frac{1}{1-\frac{T_{CSI-RS}}{MGRP}}$, when the BFD-RS resource is partially overlapped with measurement gap and the BFD-RS resource is not overlapped with SMTC occasion ($T_{CSI\text{-}RS}$ < MGRP)

- $P = \frac{1}{1-\frac{T_{CSI-RS}}{T_{SMTCperiod}}}$, when the BFD-RS resource is not overlapped with measurement gap and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$).

- $P = P_{sharing\ factor}$, when the BFD-RS resource is not overlapped with measurement gap and the BFD-RS resource is fully overlapped with SMTC occasion ($T_{CSI-RS} = T_{SMTCperiod}$).

- $P = \frac{1}{1-\frac{T_{CSI-RS}}{MGRP}-\frac{T_{CSI-RS}}{T_{SMTCperiod}}}$, when the BFD-RS resource is partially overlapped with measurement gap and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and

  - $T_{SMTCperiod} \neq$ MGRP or

  - $T_{SMTCperiod}$ = MGRP and $T_{CSI-RS} < 0.5 \times T_{SMTCperiod}$

- $P = \frac{P_{sharing\ factor}}{1-\frac{T_{CSI-RS}}{MGRP}}$, when the BFD-RS resource is partially overlapped with measurement gap and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and $T_{SMTCperiod}$ = MGRP and $T_{CSI-RS} = 0.5 \times T_{SMTCperiod}$

- $P = \frac{1}{1-\frac{T_{CSI-RS}}{T_{SMTCperiod}}}$, when the BFD-RS resource is partially overlapped with measurement gap ($T_{CSI-RS} <$ MGRP) and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with measurement gap.

- $P = \frac{P_{sharing\ factor}}{1-\frac{T_{CSI-RS}}{MGRP}}$, when the BFD-RS resource is partially overlapped with measurement gap and the BFD-RS resource is fully overlapped with SMTC occasion ($T_{CSI-RS} = T_{SMTCperiod}$) and SMTC occasion is partially overlapped with measurement gap ($T_{SMTCperiod} <$ MGRP)

- $P_{sharing\ factor}$ = 1, if the BFD-RS resource outside measurement gap is

  - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and;

  - not overlapped with the RSSI symbols indicated by *ss-RSSI-Measurement* and 1 data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured,

- $P_{sharing\ factor}$ = 3, otherwise.

where,

If the high layer in TS 38.331 [2] signaling of *smtc2* is configured, $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc2*; Otherwise $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc1*. $T_{SMTCperiod}$ is the shortest SMTC period among all CCs in the same FR2 band, provided the SMTC offset of all CCs in FR2 have the same offset.

Note: The overlap between CSI-RS for BFD and SMTC means that CSI-RS for BFD is within the SMTC window duration.

Longer evaluation period would be expected if the combination of the BFD-RS resource, SMTC occasion and measurement gap configurations does not meet pervious conditions.

For either an FR1 or FR2 serving cell, longer BFD evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer BFD evaluation period would be expected during the period $T_{identify_CGI,E-UTRAN}$ when the UE is requested to decode an LTE CGI.

The values of M_{BFD} used in Table 8.18.3.2-1 and Table 8.18.3.2-2 are defined as

- M_{BFD} = 10, if the CSI-RS resource(s) in the two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$ used for BFD is transmitted with Density = 3 and over the bandwidth $\geqslant$ 24 PRBs.

The values of P_{BFD} used in Table 8.18.3.2-1 and Table 8.18.3.2-2 are defined as

For each CSI-RS resource in the two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$ configured for PCell or PSCell in EN-DC or NE-DC or SA; or PCell in NR-DC

- P_{BFD} = 1.

For each CSI-RS resource in the two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$ configured for PSCell in NR-DC

P_{BFD} = 2 if UE is configured for beam failure detection on SCell, 1 otherwise.

For each CSI-RS resource in the two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$ configured for a SCell

- P_{BFD} = Z in EN-DC or NE-DC or SA.
- P_{BFD} = 2* Z in NR-DC.

Where Z is the number of band(s) on which UE is performing beam failure detection only for SCell.

The values of P_{TRP} define in table 8.518.3.2-2 is defined as 2,if SSB/CSI-RS resource in the two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$ are overalapped, else it is 1.

Table 8.18.2-1: Evaluation period $T_{Evaluate_BFD_CSI\text{-}RS}$ for FR1

Configuration	$T_{Evaluate_BFD_CSI\text{-}RS}$ (ms)
no DRX	Max(50, Ceil($M_{BFD} \times P \times P_{BFD}$) × $T_{CSI\text{-}RS}$)
DRX cycle ≤ 320ms	Max(50, Ceil(1.5 × $M_{BFD} \times P \times P_{BFD}$) × Max($T_{DRX}$, $T_{CSI\text{-}RS}$))
DRX cycle > 320ms	Ceil($M_{BFD} \times P \times P_{BFD}$) × T_{DRX}
Note: $T_{CSI\text{-}RS}$ is the periodicity of CSI-RS resource in the two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$. T_{DRX} is the DRX cycle length.	

Table 8.18.3.2-2: Evaluation period $T_{Evaluate_BFD_CSI\text{-}RS}$ for FR2

Configuration	$T_{Evaluate_BFD_CSI\text{-}RS}$ (ms)
no DRX	Max(50, Ceil($M_{BFD} \times P \times N \times P_{BFD}$*$P_{TRP}$) × $T_{CSI\text{-}RS}$)
DRX cycle ≤ 320ms	Max(50, Ceil(1.5 × $M_{BFD} \times P \times N \times P_{BFD}$*$P_{TRP}$) × Max($T_{DRX}$, $T_{CSI\text{-}RS}$))
DRX cycle > 320ms	Ceil($M_{BFD} \times P \times N \times P_{BFD}$*$P_{TRP}$) × T_{DRX}
Note: $T_{CSI\text{-}RS}$ is the periodicity of CSI-RS resource in the two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$. T_{DRX} is the DRX cycle length.	

8.18.3.3 Measurement restrictions for CSI-RS beam failure detection

The SSB mentioned in this clause can be associated with either the serving cell PCI or a PCI different from serving cell PCI.

The UE is required to be capable of measuring CSI-RS for BFD without measurement gaps. The UE is required to perform the CSI-RS measurements with measurement restrictions as described in the following scenarios.

For both FR1 and FR2, when the CSI-RS for BFD measurement is in the same OFDM symbol as SSB for RLM, BFD, CBD or L1-RSRP measurement, UE is not required to receive CSI-RS for BFD measurement in the PRBs that overlap with an SSB.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has same SCS than CSI-RS for BFD measurement, the UE shall be able to perform CSI-RS measurement without restrictions.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has different SCS than CSI-RS for BFD measurement, the UE shall be able to perform CSI-RS measurement with restrictions according to its capabilities:

- If the UE supports *simultaneousRxDataSSB-DiffNumerology* the UE shall be able to perform CSI-RS measurement without restrictions.

- If the UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both CSI-RS for BFD measurement and SSB. Longer measurement period for CSI-RS based BFD measurement is expected, and no requirements are defined.

For FR1, when the CSI-RS for BFD measurement is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement, UE shall be able to measure the CSI-RS for BFD measurement without any restriction.

For FR2, when the CSI-RS for BFD measurement on one CC is in the same OFDM symbol as SSB for RLM, BFD or L1-RSRP measurement on the same CC or different CCs in the same band, or in the same symbol as SSB for CBD measurement on the same CC or different CCs in the same band when beam failure is detected, UE is required to measure one of but not both CSI-RS for BFD measurement and SSB. Longer measurement period for CSI-RS based BFD measurement is expected, and no requirements are defined.

For FR2, when the CSI-RS for BFD measurement on one CC is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band,

- In the following cases, UE is required to measure one of but not both CSI-RS for BFD measurement and the other CSI-RS. Longer measurement period for CSI-RS based BFD measurement is expected, and no requirements are defined.

  - The CSI-RS for BFD measurement or the other CSI-RS in a resource set configured with repetition ON, or

  - The other CSI-RS is configured in two sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$ and beam failure is detected, or

  - The two CSI-RS-es are not QCL-ed w.r.t. QCL-TypeD, or the QCL information is not known to UE,

- Otherwise, UE shall be able to measure the CSI-RS for BFD measurement without any restriction.

When two CSI-RSs for BFD measurements are from different sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$, UE shall be able to perform measure both CSI-RSs for BFD measurements.

8.18.4 Minimum requirement for L1 indication

When more than one TRP is configured with different resource set for each TRP, requirements specified in 8.5.4 shall apply for each TRP.

8.18.5 Requirements for SSB based candidate beam detection

8.18.5.1 Introduction

The requirements in this clause apply for each SSB resource in the sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$configured for a serving cell, provided that the SSBs configured for candidate beam detection (CBD) are actually transmitted within UE active DL BWP during the entire evaluation period specified in clause 8.18.5.2. The SSB(s) in set $\bar{q}_{1,1}$ can be associated with an additional PCI other than serving PCI.

8.18.5.2 Minimum requirement

Upon request the UE shall be able to evaluate whether the L1-RSRP measured on the configured SSB resource in the two sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$,estimated over the last $T_{Evaluate_CBD_SSB}$ ms period becomes better than the threshold Q_{in_LR} provided SSB_RP and SSB Ês/Iot are according to Annex Table B.2.4.1 for a corresponding band.

The UE shall monitor the configured SSB resources using the evaluation period in table 8.18.5.2-1 and 8.18.5.2-2 corresponding to the non-DRX mode, if the configured DRX cycle $\leqslant$ 320ms.

The value of $T_{Evaluate_CBD_SSB}$ is defined in Table 8.18.5.2-1 for FR1.

The value of $T_{Evaluate_CBD_SSB}$ is defined in Table 8.18.5.2-2 for FR2 with scaling factor N=8.

For FR1,

- $P = \frac{1}{1-\frac{T_{SSB}}{MGRP}}$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the SSB,
- P = 1 when in the monitored cell there are no measurement gaps overlapping with any occasion of the SSB.

For FR2,

- $P = \frac{1}{1-\frac{T_{SSB}}{T_{SMTCperiod}}}$, when candidate beam detection RS is not overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$).
- P is $P_{sharing\ factor}$, when candidate beam detection RS is not overlapped with measurement gap and candidate beam detection RS is fully overlapped with SMTC period ($T_{SSB} = T_{SMTCperiod}$).
- $P = \frac{1}{1-\frac{T_{SSB}}{MGRP}-\frac{T_{SSB}}{T_{SMTCperiod}}}$, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and
  - $T_{SMTCperiod} \neq$ MGRP or
  - $T_{SMTCperiod}$ = MGRP and $T_{SSB} < 0.5 \times T_{SMTCperiod}$
- $P = \frac{P_{sharing\ factor}}{1-\frac{T_{SSB}}{MGRP}}$, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and $T_{SMTCperiod}$ = MGRP and $T_{SSB} = 0.5 \times T_{SMTCperiod}$
- $P = \frac{1}{1-\frac{T_{SSB}}{Min(MGRP,T_{SMTCperiod})}}$, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with measurement gap
- $P = \frac{P_{sharing\ factor}}{1-\frac{T_{SSB}}{MGRP}}$, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is fully overlapped with SMTC occasion ($T_{SSB} = T_{SMTCperiod}$) and SMTC occasion is partially overlapped with measurement gap ($T_{SMTCperiod} <$ MGRP)
- $P_{sharing\ factor}$ = 1, if the candidate beam detection RS outside measurement gap is
  - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and;
  - not overlapped with the RSSI symbols indicated by *ss-RSSI-Measurement* and 1 data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured
- $P_{sharing\ factor}$ = 3, otherwise.

where,

If the high layer in TS 38.331 [2] signaling of *smtc2* is present, $T_{SMTCperiod}$ follows *smtc2*; Otherwise $T_{SMTCperiod}$ follows *smtc1*. $T_{SMTCperiod}$ is the shortest SMTC period among all CCs in the same FR2 band, provided the SMTC offset of all CCs in FR2 have the same offset.

Longer evaluation period would be expected if the combination of the CBD-RS resource, SMTC occasion and measurement gap configurations does not meet pervious conditions.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer CBD evaluation period would be expected during the period $T_{identify_CGI,E-UTRAN}$ when the UE is requested to decode an LTE CGI.

The values of P_{CBD} used in Table 8.18.5.2-1 and Table 8.18.5.2-2 are defined as

For each SSB resource in the sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$ configured for PCell or PSCell in EN-DC or NE-DC or SA; or PCell in NR-DC

- P_{CBD} = 1.

For each SSB resource in the sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$ configured for PSCell in NR-DC

- P_{CBD} = 2 if UE is configured for candidate beam detection on SCell, 1 otherwise.

For each SSB resource in the sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$ configured for a SCell

- P_{CBD} = Z in EN-DC or NE-DC or SA.
- P_{CBD} = 2* Z in NR-DC.

  Where Z is the number of band(s) on which UE is performing beam failure detection only for SCell
- P_{CBD} is the number of band(s) on which UE is performing candidate beam detection only for SCell.

The values of P_{TRP} defined in table 8.18.5.2-2 is defined as 2, if SSB/CSI-RS resource in the two sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$ are overlapped, else it is 1.

Table 8.18.5.2-1: Evaluation period $T_{Evaluate_CBD_SSB}$ for FR1

Configuration	$T_{Evaluate_CBD_SSB}$ (ms)
non-DRX, DRX cycle $\leqslant$ 320ms	Max(25, Ceil($3 \times P \times P_{CBD}$) $\times T_{SSB}$)
DRX cycle > 320ms	Ceil($3 \times P \times P_{CBD}$) $\times T_{DRX}$
Note: T_{SSB} is the periodicity of SSB in the two sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$. T_{DRX} is the DRX cycle length.	

Table 8.18.5.2-2: Evaluation period $T_{Evaluate_CBD_SSB}$ for FR2

Configuration	$T_{Evaluate_CBD_SSB}$ (ms)
non-DRX, DRX cycle $\leqslant$ 320ms	Max(25, Ceil($3 \times P \times N \times P_{CBD} \times P_{TRP}$) $\times T_{SSB}$)
DRX cycle > 320ms	Ceil($3 \times P \times N \times P_{CBD} \times P_{TRP}$) $\times T_{DRX}$
Note: T_{SSB} is the periodicity of SSB in the two sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$. T_{DRX} is the DRX cycle length.	

8.18.5.3 Measurement restriction for SSB based candidate beam detection

For FR1, when the SSB for CBD measurement is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for CBD measurement without any restrictions.
- If SSB and CSI-RS have different SCS-es,
  - If UE supports *simultaneousRxDataSSB-DiffNumerology*, UE shall be able to measure the SSB for CBD measurement without any restriction.

- If UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both SSB for CBD measurement and CSI-RS. Longer measurement period for SSB based CBD measurement is expected, and no requirements are defined.

For FR2, when the SSB for CBD measurement on one CC is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both SSB for CBD measurement and CSI-RS. Longer measurement period for SSB based CBD measurement is expected, and no requirements are defined. When the SSB and CSI-RS for CBD measurements are from different sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$, UE shall be able to measure both SSB and CSI-RS for CBD measurements.

For FR2, when the SSB for CBD measurement on one CC is in the same OFDM symbol as SSB with a different PCI for RLM, BFD or L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both SSBs with the two different PCIs. Longer measurement period for SSB based CBD measurement is expected, and no requirements are defined.

For FR2, if network configures same or mixed numerology between SSB for CBD measurement on one FR2 band and CSI-RS for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement on the other FR2 band, UE shall be able to perform the related SSB based measurements in one band without any measurement restrictions in the other band, provided that UE is capable of independent beam management on this FR2 band pair.

8.18.6 Requirements for CSI-RS based candidate beam detection

8.18.6.1 Introduction

The requirements in this clause apply for each CSI-RS resource in the sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$ configured for a serving cell, provided that the CSI-RS resources configured for candidate beam detection are actually transmitted within UE active DL BWP during the entire evaluation period specified in clause 8.18.6.2.

8.18.6.2 Minimum requirement

Upon request the UE shall be able to evaluate whether the L1-RSRP measured on the configured CSI-RS resource in sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$ estimated over the last $T_{Evaluate_CBD_CSI\text{-}RS}$ [ms] period becomes better than the threshold Q_{in_LR} within $T_{Evaluate_CBD_CSI\text{-}RS}$ [ms] period provided CSI-RS Ês/Iot is according to Annex Table B.2.4.2 for a corresponding band.

The UE shall monitor the configured CSI-RS resources using the evaluation period in table 8.18.6.2-1 and 8.18.6.2-2 corresponding to the non-DRX mode, if the configured DRX cycle $\leqslant$ 320ms.

The value of $T_{Evaluate_CBD_CSI\text{-}RS}$ is defined in Table 8.18.6.2-1 for FR1.

The value of $T_{Evaluate_CBD_CSI\text{-}RS}$ is defined in Table 8.18.6.2-2 for FR2 with scaling factor N=8.

For FR1,

- $P = \frac{1}{1-\frac{T_{CSI-RS}}{MGRP}}$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the CSI-RS; and

- P = 1 when in the monitored cell there are no measurement gaps overlapping with any occasion of the CSI-RS.

For FR2,

- P = 1, when candidate beam detection RS is not overlapped with measurement gap and also not overlapped with SMTC occasion.

- $P = \frac{1}{1-\frac{T_{CSI-RS}}{MGRP}}$ when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is not overlapped with SMTC occasion ($T_{CSI\text{-}RS}$ < MGRP)

- $P = \frac{1}{1-\frac{T_{CSI-RS}}{T_{SMTCperiod}}}$, when candidate beam detection RS is not overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$).

- $P = P_{sharing\ factor}$, when candidate beam detection RS is not overlapped with measurement gap and candidate beam detection RS is fully overlapped with SMTC occasion ($T_{CSI-RS} = T_{SMTCperiod}$).

- $P = \frac{1}{1-\frac{T_{CSI-RS}}{MGRP}-\frac{T_{CSI-RS}}{T_{SMTCperiod}}}$,, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and

  - $T_{SMTCperiod} \neq$ MGRP or

  - $T_{SMTCperiod}$ = MGRP and $T_{CSI-RS} < 0.5 \times T_{SMTCperiod}$

- $P = \frac{P_{\text{sharing factor}}}{1-\frac{T_{CSI-RS}}{MGRP}}$, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and $T_{SMTCperiod}$ = MGRP and $T_{CSI-RS} = 0.5 \times T_{SMTCperiod}$

- $P = \frac{1}{1-\frac{T_{CSI-RS}}{Min(MGRP,T_{SMTCperiod})}}$, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with measurement gap

- $P = \frac{3}{1-\frac{T_{CSI-RS}}{MGRP}}$,, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is fully overlapped with SMTC occasion ($T_{CSI-RS} = T_{SMTCperiod}$) and SMTC occasion is partially overlapped with measurement gap ($T_{SMTCperiod} <$ MGRP)

- $P_{sharing\ factor} = 1$, if the candidate beam detection RS outside measurement gap is

  - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and;

  - not overlapped with the RSSI symbols indicated by *ss-RSSI-Measurement* and 1 data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured.

- $P_{sharing\ factor} = 3$, otherwise.

where,

If the high layer in TS 38.331 [2] signaling of *smtc2* is present, $T_{SMTCperiod}$ follows *smtc2*; Otherwise $T_{SMTCperiod}$ follows *smtc1*. $T_{SMTCperiod}$ is the shortest SMTC period among all CCs in the same FR2 band, provided the SMTC offset of all CCs in FR2 have the same offset.

Note: The overlap between CSI-RS for CBD and SMTC means that CSI-RS for CBD is within the SMTC window duration.

Longer evaluation period would be expected if the combination of the CBD-RS resource, SMTC occasion and measurement gap configurations does not meet pervious conditions.

Longer evaluation period would be expected if the CSI-RS is on the same OFDM symbols with RLM, BFD, BM-RS, or other CBD-RS, according to the measurement restrictions defined in clause 8.18.6.3.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer CBD evaluation period would be expected during the period $T_{identify_CGI,E-UTRAN}$ when the UE is requested to decode an LTE CGI.

The values of M_{CBD} used in Table 8.18.6.2-1 and Table 8.18.6.2-2 are defined as

- M_{CBD} = 3, if the CSI-RS resource configured in the sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$ is transmitted with Density = 3 and over the bandwidth $\geqslant$ 24 PRBs.

The values of P_{CBD} used in Table 8.18.6.2-1 and Table 8.18.6.2-2 are defined as

For each CSI-RS resource in the sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$ configured for PCell or PSCell in EN-DC or NE-DC or SA; or PCell in NR-DC

- P_{CBD} = 1.

For each CSI-RS resource in the sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$ configured for PSCell in NR-DC

- P_{CBD} = 2 if UE configured for candidate beam detection on SCell, 1 otherwise.

For each CSI-RS resource in the sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$ configured for a SCell

- P_{CBD} = Z in EN-DC or NE-DC or SA.
- P_{CBD} = 2* Z in NR-DC.

  Where Z is the number of band(s) on which UE is performing beam failure detection only for SCell
- P_{CBD} is the number of band(s) on which UE is performing candidate beam detection only for SCell.

The values of P_{TRP} defined in table 8.18.6.2-2 is defined as 2, if SSB/CSI-RS resource in the two sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$ are overlapped, else it is 1.

Table 8.18.6.2-1: Evaluation period $T_{Evaluate_CBD_CSI\text{-}RS}$ for FR1

Configuration	$T_{EvaluateC_CBD_CSI\text{-}RS}$ (ms)
non-DRX, DRX cycle $\leqslant$ 320ms	Max(25, Ceil($M_{CBD} \times P \times P_{CBD}$) $\times T_{CSI\text{-}RS}$)
DRX cycle > 320ms	Ceil($M_{CBD} \times P \times P_{CBD}$) $\times T_{DRX}$
Note: $T_{CSI\text{-}RS}$ is the periodicity of CSI-RS resource in the two sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$. T_{DRX} is the DRX cycle length.	

Table 8.18.6.2-2: Evaluation period $T_{Evaluate_CBD_CSI\text{-}RS}$ for FR2

Configuration	$T_{Evaluate_CBD_CSI\text{-}RS}$ (ms)
non-DRX, DRX cycle $\leqslant$ 320ms	Max(25, Ceil($M_{CBD} \times P \times N \times P_{CBD} \times P_{TRP}$) $\times T_{CSI\text{-}RS}$)
DRX cycle > 320ms	Ceil($M_{CBD} \times P \times N \times P_{CBD} \times P_{TRP}$) $\times T_{DRX}$
Note: $T_{CSI\text{-}RS}$ is the periodicity of CSI-RS resource in the two sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$. T_{DRX} is the DRX cycle length.	

8.18.6.3 Measurement restriction for CSI-RS based candidate beam detection

The SSB mentioned in this clause can be associated with either the serving cell PCI or a PCI different from serving cell PCI.

For both FR1 and FR2, when the CSI-RS for CBD measurement is in the same OFDM symbol as SSB for RLM, BFD, CBD or L1-RSRP measurement, UE is not required to receive CSI-RS for CBD measurement in the PRBs that overlap with an SSB.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has same SCS than CSI-RS for CBD measurement, the UE shall be able to perform CSI-RS based CBD measurement without restrictions.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has different SCS than CSI-RS for CBD measurement, the UE shall be able to perform CSI-RS based CBD measurement with restrictions according to its capabilities:

- If the UE supports *simultaneousRxDataSSB-DiffNumerology* the UE shall be able to perform CSI-RS based CBD measurement for without restrictions.

- If the UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both CSI-RS for CBD measurement and SSB. Longer measurement period for CSI-RS based CBD measurement is expected, and no requirements are defined.

For FR1, when the CSI-RS for CBD measurement is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement, UE shall be able to measure the CSI-RS for CBD measurement without any restriction.

For FR2, when the CSI-RS for CBD measurement on one CC is in the same OFDM symbol as SSB for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both CSI-RS for CBD measurement and SSB. Longer evaluation period for CSI-RS based CBD measurement is expected, and no requirements are defined.

For FR2, when the CSI-RS for CBD measurement on one CC is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both CSI-RS for CBD measurement and the other CSI-RS. Longer evaluation period for CSI-RS based CBD measurement is expected, and no requirements are defined. When two CSI-RSs for CBD measurements are from different sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$, UE shall be able to measure both CSI-RSs for CBD measurements.

8.18.7 Requirements for TRP specific Beam Failure Recovery

8.18.7.1 Introduction

For the UE provided with a configuration of PUCCH transmission with a link recovery request (LRR) as described in clause 9.2.4 in TS 38.213 [3], if beam recovery procedure is triggered for any of the TRPs, the UE shall transmit SR for UL resouce, followed by MAC CE providing beam index for the corresponding TRP whose radio link quality is worse than $Q_{out,LR}$. The index, q_{new}, provided in the TRP specific BFR MAC CE is provided by higher layer for a periodic CSI-RS configuration or for a SSB, as described in clause 5.17 of TS38.321 [7].

For the UE not provided with a configuration of PUCCH transmission with a link recovery request (LRR) as described in clause 9.2.4 in TS 38.213 [3], if beam recovery procedure is triggered for any of TRPs, the UE shall transmit preamble for UL-SCH resource application, followed by MAC CE providing one index for the corresponding TRP whose radio link quality is worse than $Q_{out,LR}$, and the index q_{new} for a periodic CSI-RS configuration or for a SSB provided by higher layer, as described in clause 5.17 of TS38.321 [7], if any, for a corresponding TRP.

8.18.7.2 Requirement

Provided that UE is configured by *schedulingRequestID-BFR-r17* and/or *schedulingRequestID-BFR2-r17*for BFR set 1 (i.e., TRP1) and BFR set 2 (i.e., TRP2) respectively, a configuration for LRR in a PUCCH transmission, after BFR is triggered on any of the TRPs as described in clause 5.17 of TS38.321 [7], UE shall be capable of transmit PUCCH with a LRR within a period of T on any of the TRPs where BFR running.Where:

- $T = T_1 \times Ceil((T_2+D)/T_1)$ in which T_1, T_2 and D are defined as

  - T_1 is equal to the periodicity of PUCCH configured with *schedulingRequestID-BFR-r17 for* BFR set 1 schedulingRequestID-BFR2-r17 for BFR set 2..

  - $T_2 = T_{Evaluate_CBD}$ is the evaluation period specified in clause 8.18.5 or 8.18.6 for SSB or CSI-RS based candidate beam detection, that is $T_{Evaluate_CBD_SSB}$ or $T_{Evaluate_CBD_CSI-RS}$, depending on the applicable reference signal configured for candidate beam detection.

  - D = [2ms] is the UE Processing time.

8.18.8 Scheduling availability of UE during TRP specific beam failure detection

Scheduling availability restrictions when the UE is performing TRP specific beam failure detection are described in the following clauses.

8.18.8.1 Scheduling availability of UE performing TRP specific beam failure detection with a same subcarrier spacing as PDSCH/PDCCH on FR1

There are no scheduling restrictions due to TRP specific beam failure detection performed on SSB and CSI-RS configured for BFD with the same SCS as PDSCH or PDCCH in FR1.

8.18.8.2 Scheduling availability of UE performing TRP specific beam failure detection with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UEs which support *simultaneousRxDataSSB-DiffNumerology* [14] there are no restrictions on scheduling availability due to TRP specific beam failure detection when SSB is configured as BFD. For UEs which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to TRP specific beam failure detection when SSB is configured as BFD.

- The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH or CSI-RS for tracking or CSI-RS for CQI on SSB symbols to be measured for TRP specific beam failure detection.

When intra-band carrier aggregation in FR1 is configured, the scheduling restrictions on FR1 serving PCell or PSCell apply to all serving cells in the same band on the symbols that fully or partially overlap with restricted symbols. When inter-band carrier aggregation within FR1 is configured, there are no scheduling restrictions on FR1 serving cell(s) configured in other bands than the bands in which PCell or PSCell is configured.

8.18.8.3 Scheduling availability of UE performing TRP specific beam failure detection on FR2

The following scheduling restriction applies due to TRP specific beam failure detection.

- For the case where no RSs are provided for BFD, or when CSI-RS is configured for BFD is explicitly configured and is type-D QCLed with active TCI state for PDCCH or PDSCH, and the CSI-RS is not in a CSI-RS resource set with repetition ON
  - There are no scheduling restrictions due to TRP specific beam failure detection performed based on the CSI-RS.
- Otherwise
  - The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH or CSI-RS for tracking or CSI-RS for CQI on BFD-RS resource symbols to be measured for TRP specific beam failure detection.

When intra-band carrier aggregation in FR2 is performed, the scheduling restrictions on FR2 serving PCell or PSCell apply to all serving cells in the same band on the symbols that fully or partially overlap with restricted symbols.

When inter-band carrier aggregation in FR2 is performed, there are no scheduling restrictions on FR2 serving cells in the bands due to beam failure detection performed on FR2 serving cell(s) in different band(s), provided that UE is capable of independent beam management on this FR2 band pair. Additionally, there is no scheduling restriction if the UE is configured with different numerology between SSB on one FR2 band and data on the other FR2 band provided the UE is configured for IBM operation for the band pair.

For FR2, if following conditions are met,

- UE has been notified about system information update through paging,
- The gap between UE’s reception of PDCCH that UE monitors in the Type2-PDCCH CSS set and that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots,

For the SSB and CORESET for RMSI scheduling multiplexing patterns 3, UE is expected to receive the PDCCH that UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured for BFD mesurement; and

For the SSB and CORESET for RMSI scheduling multiplexing patterns 2, UE is expected to receive PDSCH that corresponds to the PDCCH that UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured for BFD mesurement.

8.18.8.4 Scheduling availability of UE performing TRP specific beam failure detection on FR1 or FR2 in case of FR1-FR2 inter-band CA and NR DC

There are no scheduling restrictions on FR1 serving cell(s) due to TRP specific beam failure detection performed on FR2 serving PCell and/or PSCell.

There are no scheduling restrictions on FR2 serving cell(s) due to TRP specific beam failure detection performed on FR1 serving PCell and/or PSCell.

8.18.9 Scheduling availability of UE during TRP specific candidate beam detection

Scheduling availability restrictions when the UE is performing L1-RSRP measurement for TRP specific candidate beam detection are described in the following clauses.

8.18.9.1 Scheduling availability of UE performing L1-RSRP measurement with a same subcarrier spacing as PDSCH/PDCCH on FR1

There are no scheduling restrictions due to L1-RSRP measurement performed on SSB and CSI-RS configured as TRP specific link recovery detection resource with the same SCS as PDSCH or PDCCH in FR1.

8.18.9.2 Scheduling availability of UE performing L1-RSRP measurement with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UEs which support *simultaneousRxDataSSB-DiffNumerology* [14] there are no restrictions on scheduling availability due to L1-RSRP measurement based on SSB as TRP specific link recovery detection resource. For UEs which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to L1-RSRP measurement based on SSB configured as TRP specific link recovery detection resource.

- The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH, TRS, CSI-RS for tracking or CSI-RS for CQI on SSB symbols to be measured for L1-RSRP.

When intra-band carrier aggregation in FR1 is configured, the scheduling restrictions on one serving cell apply to all other serving cells in the same band on the symbols that fully or partially overlap with the restricted symbols. When inter-band carrier aggregation within FR1 is configured, there are no scheduling restrictions on FR1 serving cell(s) configured in other bands.

8.18.9.3 Scheduling availability of UE performing L1-RSRP measurement on FR2

The following scheduling restriction applies due to TRP specific candidate beam detection

- The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH, CSI-RS for tracking or CSI-RS for CQI on reference symbols to be measured for TRP specific candidate beam detection.

When intra-band carrier aggregation in FR2 is configured, the scheduling restrictions on to one serving cell apply to all serving cells in the same band on the symbols that fully or partially overlap with restricted symbols.

When inter-band carrier aggregation in FR2 is performed, there are no scheduling restrictions on FR2 serving cells in the bands due to candidate beam detection performed on FR2 serving cell(s) in different band(s), provided that the FR2 serving cell(s) and the FR2 serving cell(s) for candidate beam detection are in a FR2 band pair and UE is capable of independent beam management on this FR2 band pair. Additionally, there is no scheduling restriction if the UE is

configured with different numerology between SSB on one FR2 band and data on the other FR2 band provided the UE is configured for IBM operation for the band pair.

For FR2, if following conditions are met,

- UE has been notified about system information update through paging,
- The gap between UE's reception of PDCCH that UE monitors in the Type2-PDCCH CSS set and that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots,

For the SSB and CORESET for RMSI scheduling multiplexing patterns 3, UE is expected to receive the PDCCH that UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured for CBD mesurement; and

For the SSB and CORESET for RMSI scheduling multiplexing patterns 2, UE is expected to receive PDSCH that corresponds to the PDCCH that UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured for CBD mesurement.

8.18.9.4 Scheduling availability of UE performing L1-RSRP measurement on FR1 or FR2 in case of FR1-FR2 inter-band CA and NR-DC

There are no scheduling restrictions on FR1 serving cell(s) due to L1-RSRP measurement performed on FR2 serving cell(s).

There are no scheduling restrictions on FR2 serving cell(s) due to L1-RSRP measurement performed on FR1 serving cell(s).

8.19 Pre-configured measurement gap activation/deactivation delay

8.19.1 Introduction

The requirements in this clause apply for a UE configured with PCell or any activated SCell in standalone NR.

UE shall complete the activation/deactivation of pre-configured measurement gap within the delay defined in this clause.

8.19.2 Pre-configured measurement gap activation/deactivation upon DCI/timer-based BWP switch

8.19.2.1 Activation/deactivation upon DCI/timer-based BWP switch delay on a single CC

The requirements in this clause only apply to the case that the DCI/timer-based BWP switch is performed on a single CC with more than one BWP configurations configured on the CC.

When BWP switch occurs, which results in status change of pre-configured measurement gap according to clause 9.1.7, UE shall be able to finish pre-configured activation or deactivation within 5 ms after the completion of the active BWP switch. The active BWP switch delay for single CC is defined in clause 8.6.2. Activation/deactivation of Pre-MG takes effect from the first complete MG occasion after the activation and deactivation delay. If the end of activation/deactivation of Pre-MG is within a gap occasion, the Pre-MG status shall not be changed immediately. Instead, the Pre-MG status shall be changed prior to the next gap occasion.

8.19.3 Pre-configured measurement gap activation/deactivation upon SCell activation/deactivation

The requirements in this clause apply when one SCell or multiple SCells are activated/deactivated.

When one SCell or multiple SCells are activated/deactivated, which results in status change of pre-configured measurement gap according to clause 9.1.7, UE shall be able to finish pre-configured activation or deactivation within 5 ms after the completion of SCell(s) activation/deactivation. The SCell(s) activation/deactivation delay for is defined in clause 8.3. Activation/deactivation of Pre-MG takes effect from the first complete MG occasion after the SCell(s) activation/deactivation delay. If the end of activation/deactivation of Pre-MG is within a gap occasion, the Pre-MG status shall not be changed immediately. Instead, the Pre-MG status shall be changed prior to the next gap occasion.

8.19.4 Pre-configured measurement gap activation/deactivation upon RRC reconfiguration

The requirements in this clause apply when UE capable of autonomous activation/deactivation mechanism receives RRC reconfiguration to:

- Add/remove of any measurement object(s), or
- Add/release/change a SCell under CA, or
- Switch active BWP or update parameters of its active BWP.

If the aforementioned RRC reconfiguration results in status change of pre-configured measurement gap according to clause 9.1.7, UE shall be able to finish pre-configured activation or deactivation within 5 ms after RRC processing delay specified in [2]. If the end of activation/deactivation of Pre-MG is within a gap occasion, the Pre-MG status shall not be changed immediately. Instead, the Pre-MG status shall be changed prior to the next gap occasion.

9 Measurement Procedure

9.1 General measurement requirement

9.1.1 Introduction

This clause contains general requirements on the UE regarding measurement reporting in RRC_CONNECTED state. The requirements are split in intra-frequency, inter-frequency, inter-RAT E-UTRAN FDD, inter-RAT E-UTRAN TDD, and L1-RSRP measurements requirements. These measurements may be used by the NG-RAN. The measurement quantities are defined in TS38.215 [4], the measurement model is defined in TS38.300 [10], TS37.340 [17] and measurement accuracies are specified in clause 10. Control of measurement reporting is specified in TS 38.331 [2].

In the requirements of clause 9, the exceptions for side conditions apply as follows:

- for the UE capable of CA but not configured with any SCell, the applicable exceptions for side conditions are specified in Annex B, clause B.3.2.1 for UE supporting CA in FR1, and clause B.3.2.3 for UE supporting CA in FR2, respectively;

- for the UE capable of CA and configured with at least one SCell, the applicable exceptions for side conditions are specified in Annex B, clause B.3.2.2 for UE configured with CA in FR1, and clause B.3.2.4 for UE supporting CA in FR2, respectively;

- for the UE capable of SUL but not configured with SUL, the applicable exceptions for side conditions are specified in Annex B, clause B.3.4.1 for UE supporting SUL in FR1;

- for the UE capable of SUL and configured with at least one SUL, the applicable exceptions for side conditions are specified in Annex B, clause B.3.4.2 for UE configured with SUL in FR1.

9.1.2 Measurement gap

If the UE requires measurement gaps to identify and measure intra-frequency cells and/or inter-frequency cells and/or inter-RAT E-UTRAN cells, and the UE does not support independent measurement gap patterns for different frequency ranges as specified in Table 5.1-1 in [18, 19, 20], in order for the requirements in the following clauses to apply the network must provide a single per-UE measurement gap pattern for concurrent monitoring of all frequency layers.

If the UE requires measurement gaps to identify and measure intra-frequency cells and/or inter-frequency cells and/or inter-RAT E-UTRAN cells, and the UE supports independent measurement gap patterns for different frequency ranges as specified in Table 5.1-1 in [18, 19, 20], in order for the requirements in the following clauses to apply the network must provide either per-FR measurement gap patterns for frequency range where UE requires per-FR measurement gap for concurrent monitoring of all frequency layers of each frequency range independently, or a single per-UE measurement gap pattern for concurrent monitoring of all frequency layers of all frequency ranges.

If the UE is configured via LPP [34] to measure PRS for any RSTD, PRS-RSRP, and UE Rx-Tx time difference measurement defined in TS 38.215 [4], in order for the requirements in clauses 9.9.2, 9.9.3, and 9.9.4 to apply, the network must provide

- a single per-UE measurement gap pattern for concurrent monitoring of all positioning frequency layers and intra-frequency, inter-frequency and/or inter-RAT frequency layers of all frequency ranges, or

- for measurement gap patterns other than #24 and #25, if UE supports independent measurement gap patterns for different frequency ranges for PRS measurement, per-FR measurement gap pattern for the frequency range for concurrent monitoring of all positioning frequency layers and intra-frequency, inter-frequency cells and/or inter-RAT frequency layers in the corresponding frequency range.

During the per-UE measurement gaps the UE:

- is not required to conduct reception/transmission from/to the corresponding E-UTRAN PCell, E-UTRAN SCell(s) and NR serving cells for E-UTRA-NR dual connectivity except the reception of signals used for RRM measurement(s) and the signals used for random access procedure according to TS38.321 [7].

- is not required to conduct reception/transmission from/to the corresponding NR serving cells for SA (with single carrier or CA configured) except the reception of signals used for RRM measurement(s), PRS measurement(s) and the signals used for random access procedure according to [7].

- is not required to conduct reception/transmission from/to the corresponding PCell, SCell(s) and E-UTRAN serving cells for NR-E-UTRA dual connectivity except the reception of signals used for RRM measurement(s), PRS measurement(s) and the signals used for random access procedure according to [7].

- is not required to conduct reception/transmission from/to the corresponding NR serving cells for NR-DC except the reception of signals used for RRM measurement(s), PRS measurement(s) and the signals used for random access procedure according to [7].

During the per-FR measurement gaps the UE:

- is not required to conduct reception/transmission from/to the corresponding E-UTRAN PCell, E-UTRAN SCell(s) and NR serving cells in the corresponding frequency range for E-UTRA-NR dual connectivity except the reception of signals used for RRM measurement(s) and the signals used for random access procedure according to TS38.321 [7].

- is not required to conduct reception/transmission from/to the corresponding NR serving cells in the corresponding frequency range for SA (with single carrier or CA configured) except the reception of signals used for RRM measurement(s), PRS measurement(s) and the signals used for random access procedure according to TS38.321 [7].

- is not required to conduct reception/transmission from/to the corresponding PCell, SCell(s) and E-UTRAN serving cells in the corresponding frequency range for NR-E-UTRA dual connectivity except the reception of signals used for RRM measurement(s), PRS measurement(s) and the signals used for random access procedure according to TS38.321 [7].

- is not required to conduct reception/transmission from/to the corresponding NR serving cells in the corresponding frequency range for NR-DC except the reception of signals used for RRM measurement(s), PRS measurement(s) and the signals used for random access procedure according to TS38.321 [7].

UEs shall support the measurement gap patterns listed in Table 9.1.2-1 based on the applicability specified in table 9.1.2-2 and 9.1.2-3. UE determines measurement gap timing based on gap offset configuration and measurement gap timing advance configuration provided by higher layer signalling as specified in TS 38.331 [2] and TS 36.331 [16].

Table 9.1.2-1: Gap Pattern Configurations

Gap Pattern Id	Measurement Gap Length (MGL, ms)	Measurement Gap Repetition Period (MGRP, ms)
0	6	40
1	6	80
2	3	40
3	3	80
4	6	20
5	6	160
6	4	20
7	4	40
8	4	80
9	4	160
10	3	20
11	3	160
12	5.5	20
13	5.5	40
14	5.5	80
15	5.5	160
16	3.5	20
17	3.5	40
18	3.5	80
19	3.5	160
20	1.5	20
21	1.5	40

22	1.5	80
23	1.5	160
24	10	80
25	20	160

Table 9.1.2-2: Applicability for Gap Pattern Configurations supported by the E-UTRA-NR dual connectivity UE or NR-E-UTRA dual connectivity UE

Measurement gap pattern configuration	Serving cell	Measurement Purpose[Note 5]	Applicable Gap Pattern Id
Per-UE Measurement gap	E-UTRA + FR1, or E-UTRA + FR2, or E-UTRA + FR1 + FR2	non-NR RAT [Note1,2]	0,1,2,3
		FR1 and/or FR2 [Note 7]	0-11, 24, 25
		non-NR RAT[Note1,2] and FR1 and/or FR2 [Note 7]	0, 1, 2, 3, 4, 6, 7, 8,10, 24
Per-FR measurement gap	E-UTRA and, FR1 if configured	non-NR RAT [Note1,2]	0,1,2,3
	FR2 if configured		No gap
	E-UTRA and, FR1 if configured	FR1 only	0-11
	FR2 if configured		No gap
	E-UTRA and, FR1 if configured	FR2 only	No gap
	FR2 if configured		12-23
	E-UTRA and, FR1 if configured	non-NR RAT [Note1,2] and FR1	0, 1, 2, 3, 4, 6, 7, 8,10
	FR2 if configured		No gap
	E-UTRA and, FR1 if configured	FR1 and FR2	0-11
	FR2 if configured		12-23
	E-UTRA and, FR1 if configured	non-NR RAT [Note1,2] and FR2	0, 1, 2, 3, 4, 6, 7, 8,10
	FR2 if configured		12-23
	E-UTRA and, FR1 if configured	non-NR RAT [Note1,2] and FR1 and FR2	0, 1, 2, 3, 4, 6, 7, 8,10
	FR2 if configured		12-23

Note: In E-UTRA-NR dual connectivity mode, if GSM or UTRA TDD or UTRA FDD inter-RAT frequency layer is configured to be monitored, only measurement gap pattern #0 and #1 can be used for per-FR gap in E-UTRA and FR1 if configured, or for per-UE gap. In NR-E-UTRA dual connectivity mode, if UTRA FDD inter-RAT frequency layer is configured to be monitored for SRVCC, only measurement gap pattern #0 and #1 can be used for per-FR gap in E-UTRA and FR1 if configured, or for per-UE gap.

NOTE 1: In E-UTRA-NR dual connectivity mode, non-NR RAT includes E-UTRA, UTRA and/or GSM. In NR-E-UTRA dual connectivity mode, non-NR RAT means E-UTRA, and UTRA for SRVCC.

NOTE 2: Void

NOTE 3: When E-UTRA inter-frequency RSTD measurements are configured and the UE requires measurement gaps for performing such measurements, only Gap Pattern #0 can be used.

NOTE 4: For UE supporting *supportedGapPattern-NRonly-NEDC* or *measGapPatterns-NRonly-ENDC-r16* but not supporting *supportedGapPattern* for the corresponding gap patterns among GP2-11, the corresponding gap patterns are not applicable to measurement of non-NR RATs as defined in NOTE 1.

NOTE 5: Inclusion of positioning measurements: Measurement purpose which includes E-UTRA measurements includes also E-UTRA RSRP and E-UTRA RSRQ measurements for E-CID.

NOTE 6: Measurement gap patterns #24 and #25 can be requested [2] only when the UE is configured at least with any of RSTD, UE Rx-Tx, or PRS-RSRP measurements requiring such gaps and can only be used during the corresponding positioning measurement period

NOTE 7: Inclusion of positioning measurements for measurement gaps: Measurement purpose which includes any of FR1 and FR2 measurements includes also RSTD, UE Rx-Tx, and PRS-RSRP measurements.

In E-UTRA-NR dual connectivity mode,

- if per-UE measurement gap is configured with MG timing advance of T_{MG} ms, the measurement gap starts at time T_{MG} ms advanced to the end of the latest E-UTRA subframe occurring immediately before the configured measurement gap among MCG serving cells subframes.

- if per-FR measurement gap for FR1 is configured with MG timing advance of T_{MG} ms, the measurement gap for FR1 starts at time T_{MG} ms advanced to the end of the latest E-UTRA subframe occurring immediately before the configured measurement gap among MCG serving cells subframes.

- if per-FR measurement gap for FR2 is configured with MG timing advance of T_{MG} ms, the measurement gap for FR2 starts at time T_{MG} ms advanced to the end of the latest NR subframe occurring immediately before the configured measurement gap among SCG serving cells subframes in FR2.

In NR-E-UTRA dual connectivity mode,

- if per-UE measurement gap is configured with MG timing advance of T_{MG} ms, the measurement gap starts at time T_{MG} ms advanced to the end of the latest NR subframe occurring immediately before the configured measurement gap among MCG serving cells subframes.

- if per-FR measurement gap for FR1 is configured with MG timing advance of T_{MG} ms and UE has NR serving cell in FR1, the measurement gap for FR1 starts at time T_{MG} ms advanced to the end of the latest NR subframe occurring immediately before the configured measurement gap among MCG serving cells subframes in FR1.

- if per-FR measurement gap for FR1 is configured with MG timing advance of T_{MG} ms and UE doesn't have NR serving cell in FR1, the measurement gap for FR1 starts at time T_{MG} ms advanced to the end of the latest E-UTRA subframe occurring immediately before the configured measurement gap among SCG serving cells subframes.

- if per-FR measurement gap for FR2 is configured with MG timing advance of T_{MG} ms, the measurement gap for FR2 starts at time T_{MG} ms advanced to the end of the latest NR subframe occurring immediately before the configured measurement gap among MCG serving cells subframes in FR2.

In NR-NR dual connectivity mode,

- If per-UE measurement gap is configured with MG timing advance of T_{MG} ms, the measurement gap starts at time T_{MG} ms advanced to the end of the latest MCG subframe occurring immediately before the configured measurement gap among MCG serving cells subframes.

- If per-FR measurement gap for FR1 is configured with MG timing advance of T_{MG} ms, the measurement gap for FR1 starts at time T_{MG} ms advanced to the end of the latest MCG subframe occurring immediately before the configured measurement gap among MCG serving cells subframes.

- If per-FR measurement gap for FR2 is configured with MG timing advance of T_{MG} ms, the measurement gap for FR2 starts at time T_{MG} ms advanced to the end of the latest SCG subframe occurring immediately before the configured measurement gap among SCG serving cells subframes in FR2.

T_{MG} is the MG timing advance value provided in *mgta* according to TS38.331 [2].

In determining the measurement gap starting point, UE shall use the DL timing of the latest E-UTRA or NR subframe occurring immediately before the configured measurement gap among E-UTRA or NR serving cells.

For per-FR measurement gap capable UE configured with E-UTRA-NR dual connectivity or NR-E-UTRA dual connectivity, when serving cells are in E-UTRA and FR1, measurement objects are in both E-UTRA/FR1 and FR2,

- If MN indicates UE that the measurement gap from MN applies to E-UTRA/FR1/FR2 serving cells, UE fulfils the per-UE measurement requirements for both E-UTRA/FR1 and FR2 measurement objects based on the measurement gap pattern configured by MN;

- If MN indicates UE that the measurement gap from MN applies to only LTE/FR1 serving cell(s),

  - UE fulfils the measurement requirements for FR1/LTE measurement objects based on the configured measurement gap pattern;

  - UE fulfils the requirements for FR2 measurement objects based on effective MGRP=20ms;

For per-FR measurement gap capable configured with E-UTRA-NR dual connectivity, NR-E-UTRA dual connectivity or NR-NR dual connectivity, when serving cells are in E-UTRA, FR1 and FR2, or in E-UTRA and FR2, or in FR1 and FR2, measurement objects are in both E-UTRA /FR1 and FR2,

- If MN indicates UE that the measurement gap from MN applies to E-UTRA/FR1/FR2 serving cells, UE fulfils the per-UE measurement requirements for both E-UTRA/FR1 and FR2 measurement objects based on the measurement gap pattern configured by MN.

Table 9.1.2-3: Applicability for Gap Pattern Configurations supported by the UE with NR standalone operation (with single carrier, NR CA and NR-DC configuration)

Measurement gap pattern configuration	Serving cell	Measurement Purpose NOTE 2	Applicable Gap Pattern Id
Per-UE measurement gap	FR1 NOTE5, or FR1 + FR2	non-NR RAT NOTE3,6	0,1,2,3
		FR1 and/or FR2 NOTE 9	0-11, 24, 25
		non-NR RAT and FR1 and/or FR2 NOTE3,6,9	0, 1, 2, 3, 4, 6, 7, 8,10, 24
	FR2 NOTE5	non-NR RAT only NOTE3,6	0,1,2,3
		FR1 only NOTE 9	0-11, 24, 25
		FR1 and FR2 NOTE 9	0-11, 24, 25
		non-NR RAT and FR1 and/or FR2 NOTE3,6,9	0, 1, 2, 3, 4, 6, 7, 8,10, 24
		FR2 only NOTE 9	12-23
Per-FR measurement gap	FR1 if configured	non-NR RAT only NOTE3,6	0,1,2,3
	FR2 if configured		No gap
	FR1 if configured	FR1 only	0-11
	FR2 if configured		No gap
	FR1 if configured	FR2 only	No gap
	FR2 if configured		12-23
	FR1 if configured	non-NR RAT and FR1 NOTE3,6	0, 1, 2, 3, 4, 6, 7, 8,10
	FR2 if configured		No gap
	FR1 if configured	FR1 and FR2	0-11
	FR2 if configured		12-23
	FR1 if configured	non-NR RAT and FR2 NOTE3,6	0, 1, 2, 3, 4, 6, 7, 8,10
	FR2 if configured		12-23
	FR1 if configured	non-NR RAT and	0, 1, 2, 3, 4, 6, 7, 8,10
	FR2 if configured	FR1 and FR2 NOTE3,6	12-23

NOTE 1: When E-UTRA inter-RAT RSTD measurements are configured and the UE requires measurement gaps for performing such measurements, only Gap Pattern #0 can be used.
NOTE 2: Measurement purpose which includes E-UTRA measurements includes also inter-RAT E-UTRA RSRP and RSRQ measurements for E-CID; measurement purpose which includes E-UTRA measurements includes also E-UTRA RSRP and E-UTRA RSRQ measurements for E-CID.
NOTE 3: Void
NOTE4: If per-UE measurement gap is configured with MG timing advance of T_{MG} ms, the measurement gap starts at time T_{MG} ms advanced to the end of the latest subframe occurring immediately before the configured measurement gap among all serving cells subframes.
If per-FR measurement gap for FR1 is configured with MG timing advance of T_{MG} ms, the measurement gap for FR1 starts at time T_{MG} ms advanced to the end of the latest subframe occurring immediately before the configured measurement gap among serving cells subframes in FR1.
If per-FR measurement gap for FR2 is configured with MG timing advance of T_{MG} ms, the measurement gap for FR2 starts at time T_{MG} ms advanced to the end of the latest subframe occurring immediately before the configured measurement gap among serving cells subframes in FR2.
T_{MG} is the MG timing advance value provided in *mgta* according to [2].
In determining the measurement gap starting point, UE shall use the DL timing of the latest subframe occurring immediately before the configured measurement gap among serving cells.
NOTE 5: NR-DC in Rel-15 only includes the scenarios where all serving cells in MCG in FR1 and all serving cells in SCG in FR2.
NOTE 6: In NR single carrier, NR CA, and NR-DC mode, non-NR RAT means E-UTRA, and UTRA for SRVCC. In NR single carrier, NR CA, and NR-DC mode, if UTRA FDD inter-RAT frequency layer is configured to be monitored for SRVCC, only measurement gap pattern #0 and #1 can be used for per-FR gap in E-UTRA and FR1 if configured, or for per-UE gap.
NOTE 7: For UE only supporting *supportedGapPattern-NRonly* for any gap patterns among GP2-11, the corresponding gap patterns are not applicable to measurement of non-NR RATs as defined in NOTE 6.
NOTE 8: Measurement gap patterns #24 and #25 can be requested [2] only when the UE is configured with any of RSTD, UE Rx-Tx, or PRS-RSRP measurements requiring such gaps and can only be used during the corresponding positioning measurement period.
NOTE 9: Inclusion of positioning measurements for measurement gaps: Measurement purpose which includes any of FR1 and FR2 measurements includes also RSTD, UE Rx-Tx, and PRS-RSRP measurements.

For per-FR measurement gap capable UE in NR standalone operation (with single carrier, NR CA and NR-DC configuration), for per-FR gap based measurement, when there is no serving cell in a particular FR, where measurement objects are configured, regardless if explicit per-FR measurement gap is configured in this FR, the effective MGRP in this FR is used to determine requirements;

- 20 ms for FR2 NR measurements
- 40 ms for FR1 NR measurements
- 40 ms for LTE measurements
- 40 ms for FR1+LTE measurements

For per-FR measurement gap capable UE in NR standalone operation (with single carrier, NR CA and NR-DC configuration), when serving cells are in FR1 or FR2, measurement objects are in both E-UTRA /FR1 and FR2,

- If MN indicates UE that the measurement gap from MN applies to E-UTRA/FR1/FR2 serving cells, UE fulfils the per-UE measurement requirements for both E-UTRA/FR1 and FR2 measurement objects based on the measurement gap pattern configured by MN;

If measurement gap is configured in one FR but measurement object is not configured in the FR, the scheduling opportunity in the FR depends on the configured measurement gap pattern.

For single carrier or CA with aligned frame boundaries,

For E-UTRA-NR dual connectivity (with NR single carrier, NR CA configuration), if UE is not capable of per-FR-gap, total interruption time on SCG during MGL is defined only when MGL(N) = 20ms, 10ms, 6ms, 4ms and 3ms. And if UE is capable of per-FR-gap, total interruption time on FR1 serving cells in SCG during MGL

is defined only when MGL(N) = 20ms, 10ms, 6ms, 4ms and 3ms, and total interruption time on FR2 serving cells in SCG during MGL is defined only when MGL(N) = 20ms, 10ms, 5.5ms, 3.5ms and 1.5ms.

For NR standalone operation (with single carrier, NR CA and NR-DC configuration), if UE is not capable of per-FR-gap, total interruption time on a serving cell during MGL is defined when MGL(N) = 20ms, 10ms, 6ms, 5.5ms, 4ms, 3.5ms, 3ms, and 1.5ms. And if UE is capable of per-FR-gap, total interruption time on FR1 serving cells during MGL is defined only when MGL(N) = 20ms, 10ms, 6ms, 4ms, and 3ms, and total interruption time on FR2 serving cells during MGL is defined only when MGL(N) = 20ms, 10ms, 5.5ms, 3.5ms, and 1.5ms.

For NR-E-UTRA dual connectivity (with NR single carrier, NR CA configuration), if UE is not capable of per-FR-gap, total interruption time on MCG during MGL is defined only when MGL(N) = 20ms, 10ms, 6ms, 4ms, and 3ms. And if UE is capable of per-FR-gap, total interruption time on FR1 serving cells in MCG during MGL is defined only when MGL(N) = 20ms, 10ms, 6ms, 4ms, and 3ms, and total interruption time on FR2 serving cells in MCG during MGL is defined only when MGL(N) = 20ms, 10ms, 5.5ms, 3.5ms, and 1.5ms.

For CA with non-aligned frame boundaries,

- The total interruption time on an SCC is the same as the case CA with aligned frame boundaries, if no SCC slots are partially overlapped with the measurement gap.
- The total interruption time on an SCC will be additionally extended by one SCC slot, if there exist SCC slots partially overlapped with the measurement gap.

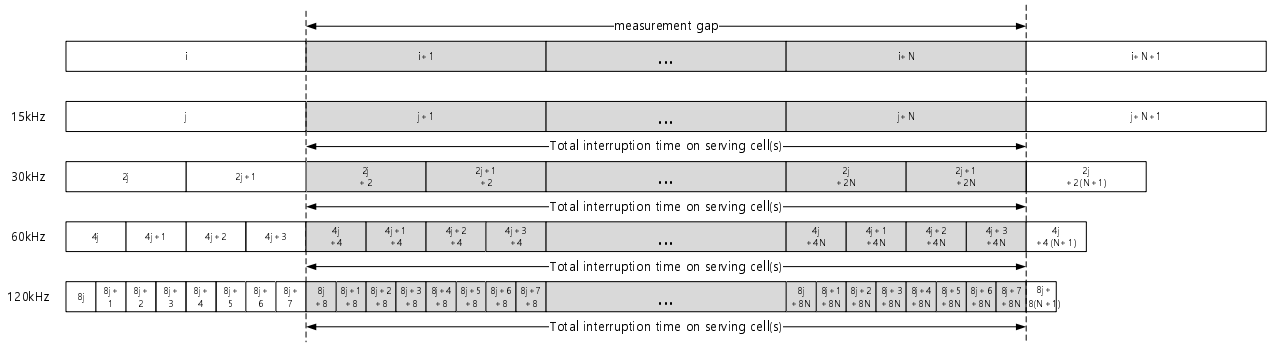

(a) Measurement gap with MGL = N(ms) with MG timing advance of 0ms for all serving cells in synchronous EN-DC, NR standalone operation (with single carrier, NR CA and synchronous NR-DC configuration) and synchronous NE-DC, and for serving cells in MCG in NR standalone operation (with asynchronous NR-DC configuration)

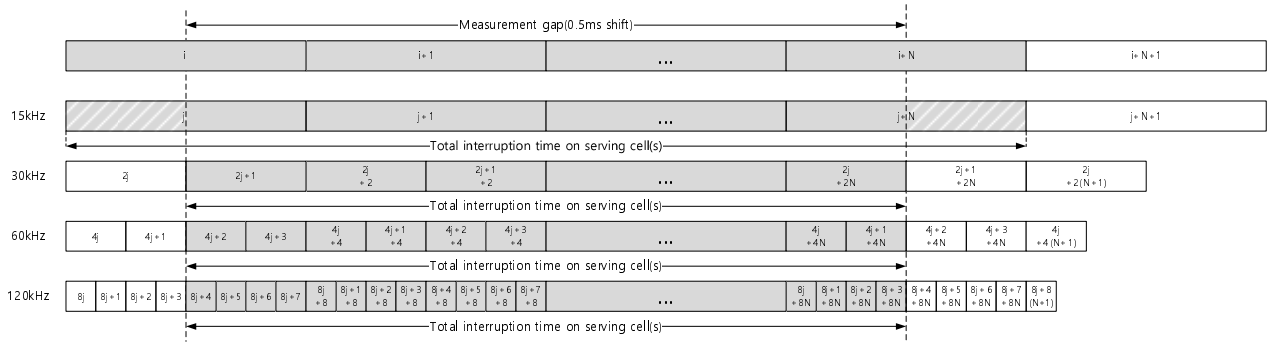

(b) Measurement gap with MGL = N(ms) with MG timing advance of 0.5ms for all serving cells in synchronous EN-DC, NR standalone operation (with single carrier, NR CA and synchronous NR-DC configuration) and synchronous NE-DC, and for serving cells in MCG in NR standalone operation (with asynchronous NR-DC configuration)

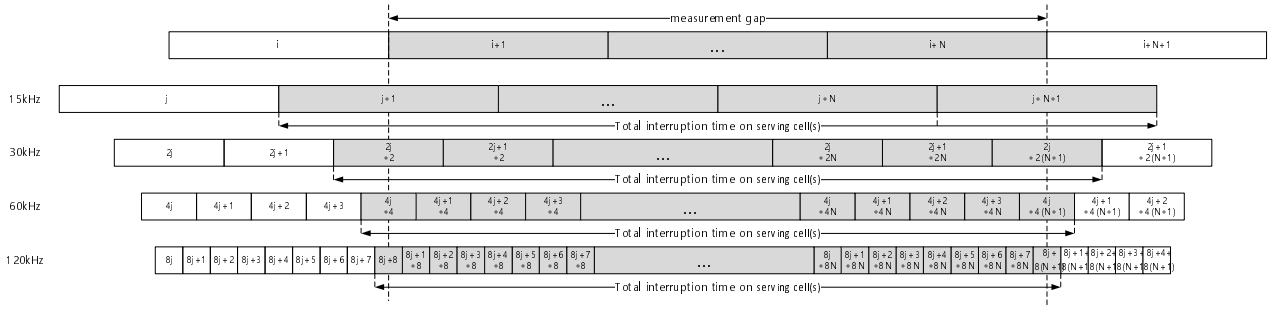

(c) Measurement gap with MGL = N(ms) with MG timing advance of 0ms for all serving cells in asynchronous EN-DC and asynchronous NE-DC, and for serving cells in SCG in NR standalone operation (with asynchronous NR-DC configuration)

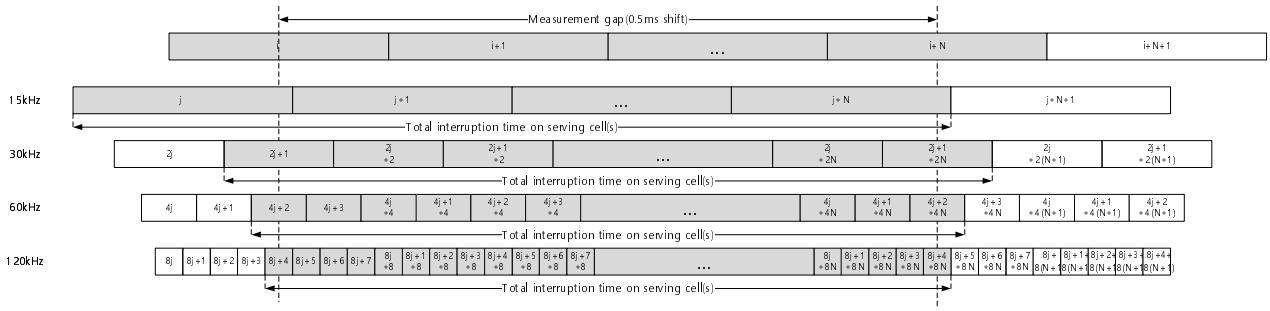

(d) Measurement gap with MGL = N(ms) with MG timing advance of 0.5ms for all serving cells in asynchronous EN-DC and asynchronous NE-DC, and for serving cells in SCG in NR standalone operation (with asynchronous NR-DC configuration)

Figure 9.1.2-1: Measurement GAP and total interruption time on serving cells for EN-DC, NR standalone operation (with single carrier, NR CA and NR-DC configuration) and NE-DC

The corresponding total number of interrupted slots on serving cells is listed in Table 9.1.2-4 for all serving cells in synchronous EN-DC, NR standalone (with single carrier, NR CA and synchronous NR-DC configuration) and NE-DC, and for serving cells in MCG in NR standalone operation (with asynchronous NR-DC configuration). The corresponding total number of interrupted slots on serving cells is listed in Table 9.1.2-4a for asynchronous EN-DC, and for serving cells in SCG in NR standalone operation (with asynchronous NR-DC configuration).

Table 9.1.2-4: Total number of interrupted slots on all serving cells during MGL for Synchronous EN-DC, NR standalone operation (with single carrier, NR CA and synchronous NR-DC configuration) and NE-DC, and on all serving cells in MCG for NR standalone operation (with asynchronous NR-DC configuration) with per-UE measurement gap or per-FR measurement gap for FR1

NR SCS (kHz)	Total number of interrupted slots on serving cells									
	When MG timing advance of 0ms is applied					When MG timing advance of 0.5ms is applied				
	MGL=20 ms	MGL=10 ms	MGL=6 ms	MGL=4 ms	MGL=3 ms	MGL=20 ms	MGL=10 ms	MGL=6 ms	MGL=4 ms	MGL=3 ms
15	20	10	6	4	3	21[Note3]	11[Note3]	7[Note3]	5[Note3]	4[Note3]
30	40	20	12	8	6	40	20	12	8	6
60	80	40	24	16	12	80	40	24	16	12
120	160	80	48	32	24	160	80	48	32	24
480 Note4	640	320	192	128	96	640	320	192	128	96
480 Note5	641	321	193	129	97	641	321	193	129	97
960 Note4	1280	640	384	256	192	1280	640	384	256	192
960 Note5	1281	641	385	257	193	1281	641	385	257	193
NOTE 1: For Gap Pattern ID 0, 1, 2 and 3, total number of interrupted subframes on MCG is MGL subframes when MG timing advance of 0ms is applied, and (MGL+1) subframes when MG timing advance of 0.5ms is applied.										

NOTE 2: NR SCSs of 120 kHz, 480kHz and 960kHz are only applicable to the case with per-UE measurement gap.
NOTE 3: Non-overlapped half-slots occur before and after the measurement gap. Whether a Rel-15 UE can receive and/or transmit in those half-slots is up to UE implementation.
NOTE 4: For NR SCSs of 480kHz and 960kHz, total number of interrupted slots on all serving cells during MGL for single carrier, intra-band NR CA with per-UE measurement gap.
NOTE 5: For NR SCSs of 480kHz and 960kHz, total number of interrupted slots on all serving cells in SCG for inter-band NR-CA and synchronous NR-DC with per-UE measurement gap.

Table 9.1.2-4a: Total number of interrupted slots on serving cells during MGL for Asynchronous EN-DC, and on all serving cells in SCG for NR standalone operation (with asynchronous NR-DC configuration) with per-UE measurement gap or per-FR measurement gap for FR1

NR SCS (kHz)	Total number of interrupted slots on serving cells									
	When MG timing advance of 0ms is applied					When MG timing advance of 0.5ms is applied				
	MGL=20 ms	MGL=10 ms	MGL=6 ms	MGL=4 ms	MGL=3 ms	MGL=20 ms	MGL=10 ms	MGL=6 ms	MGL=4 ms	MGL=3 ms
15	21	11	7	5	4	21	11	7	5	4
30	41	21	13	9	7	41	21	13	9	7
60	81	41	25	17	13	81	41	25	17	13
120	161	81	49	33	25	161	81	49	33	25
480 Note3	641	321	193	129	97	641	321	193	129	97
960 Note3	1281	641	385	257	193	1281	641	385	257	193

NOTE 1: For Gap Pattern ID 0, 1, 2 and 3, total number of interrupted subframes on MCG is MGL subframes when MG timing advance of 0ms is applied, and (MGL+1) subframes when MG timing advance of 0.5ms is applied.
NOTE 2: NR SCSs of 120 kHz, 480kHz and 960kHz are only applicable to the case with per-UE measurement gap.
NOTE 3: For NR SCSs of 480kHz and 960kHz, total number of interrupted slots on all serving cells in SCG for asynchronous NR-DC with per-UE measurement gap.

In case that UE capable of per-FR measurement gap is configured with per-FR measurement gap for FR2 serving cells, total number of interrupted slots on FR2 serving cells during MGL is listed in Table9.1.2-4b.

Table 9.1.2-4b: Total number of interrupted slots on FR2 serving cells during MGL for EN-DC, NR standalone operation (with single carrier, NR CA and NR-DC configuration) and NE-DC with per-UE measurement gap or per-FR measurement gap for FR2

NR SCS (kHz)	Total number of interrupted slots on FR2 serving cells									
	When MG timing advance of 0ms is applied					When MG timing advance of 0.25ms is applied				
	MGL= 20ms	MGL= 10ms	MGL= 5.5ms	MGL= 3.5ms	MGL= 1.5ms	MGL= 20ms	MGL= 10ms	MGL= 5.5ms	MGL= 3.5ms	MGL= 1.5ms
60	80	40	22	14	6	80	40	22	14	6
120	160	80	44	28	12	160	80	44	28	12
480 Note3	640	320	176	112	48	640	320	176	112	48
960 Note3	1280	640	352	224	96	1280	640	352	224	96

NOTE 1: The total number of interrupted slots is based on that SFN and subframe reference for per-FR gap in FR2 indicated by high layer parameter *refServCellIndicator* is an FR2 serving cell.
NOTE 2: Slot occurs before or after the measurement gap may be interrupted additionally if SFN and subframe reference for per-FR gap in FR2 indicated by high layer parameter refServCellIndicator is an FR1 serving cell.
NOTE 3: For NR SCSs of 480kHz and 960kHz, Total number of interrupted slots on FR2-2 serving cells during MGL for NR standalone operation (single carrier, NR CA and NR-DC) with per-UE measurement gap or per-FR measurement gap for FR2-2.

It is up to UE implementation whether or not the UE is able to conduct transmission in the following slot(s),

- when MGTA is not applied, in the L consecutive UL slots with respect to the SCS of the UL carrier with the same slot indices as the DL slots occurring immediately after measurement gap

- when MGTA is applied and the SCS of the UL carrier is other than 15kHz, in the L consecutive UL slots with respect to the SCS of the UL carrier with the same slot indices as the DL slots occurring immediately after measurement gap
- when MGTA is applied and the SCS of the UL carrier is 15kHz, in the L consecutive UL slots with respect to the SCS of the UL carrier with the same slot indices as the DL slots occurring immediately after the slot partially overlapped with measurement gap

where UL slot denotes that all the symbols in the slot are uplink symbols, and L=1 if $(N_{\mathrm{TA}} + N_{\mathrm{TA\ offset}}) \times T_{\mathrm{c}}$ for the UL transmission is less than the length of one slot; L=2 otherwise.

Note: Network is supposed to take into account the possible difference between the estimated TA at network and actual TA at UE when scheduling UE in the above slot(s).

Table 9.1.2-5: (Void)

If a positioning measurement gap is configured via *PosGapConfig* and activated by MAC CE, the measurement requirements do not apply for RRM measurement that requires measurement gaps.

9.1.2.1 EN-DC: Measurement Gap Sharing

For E-UTRA-NR dual connectivity UE configured with per-UE measurement gap, measurement gap sharing shall be applied when UE requires measurement gaps to identify and measure cells on intra-frequency carriers for both SSB and CSI-RS based L3 measurement or when SMTC configured for intra-frequency measurement are fully overlapping with per-UE measurement gaps, and when UE requires measurement gaps to identify and measure cells on inter-frequency carriers or when all of SMTC configured for inter-frequency SSB based measurement without measurement gaps are fully overlapping with per-UE measurement gaps, E-UTRA gap-needed inter-frequency carriers and inter-RAT UTRAN carriers and/or inter-RAT GSM carriers.

For E-UTRA-NR dual connectivity UE configured with per-FR1 measurement gap, measurement gap sharing shall be applied when UE requires measurement gaps to identify and measure cells on FR1 intra-frequency carriers or when SMTC configured for FR1 intra-frequency measurement are fully overlapping with per-FR1 measurement gaps, and when UE requires measurement gaps to identify and measure cells on FR1 inter-frequency carriers for both SSB and CSI-RS based L3 measurement or when all of SMTC configured for inter-frequency SSB based measurement without measurement gaps are fully overlapping with per-FR1 measurement gaps, E-UTRA gap-needed inter-frequency carriers, inter-RAT UTRAN carriers and/or inter-RAT GSM carriers.

For E-UTRA-NR dual connectivity UE configured with per-FR2 measurement gap, measurement gap sharing shall be applied when UE requires measurement gaps to identify and measure cells on FR2 intra-frequency carriers or when SMTC configured for FR2 intra-frequency measurement are fully overlapping with per-FR2 measurement gaps, and when UE requires measurement gaps to identify and measure cells on FR2 inter-frequency carriers for both SSB and CSI-RS based L3 measurement, or when all of SMTC configured for inter-frequency SSB based measurement without measurement gaps are fully overlapping with per-FR2 measurement gaps.

When network signals “01”, “10” or “11” with RRC parameter *MeasGapSharingScheme* [2][16]and the value of X is defined as in Table 9.1.2.1-1, and

- $K_{\mathrm{intra}} = 1 / X * 100$,
- $K_{\mathrm{inter}} = 1 / (100 – X) * 100$,

When network signals “00” indicating equal splitting gap sharing, X is not applied.

The RRC parameter *MeasGapSharingScheme* shall be applied to the calculation of carrier specific scaling factor as specified in clause 9.1.5.2.1.

Table 9.1.2.1-1: Value of parameter X for EN-DC measurement gap sharing

measGapSharingScheme	**Value of X (%)**
‘00’	Equal splitting
‘01’	25
‘10’	50

	'11'	75
Note:	It is left to UE implementation to determine which measurement gap sharing scheme in the table *to be applied*, when *MeasGapSharingScheme is absent and there is* no stored value in the field.	

9.1.2.1a SA: Measurement Gap Sharing

For NR standalone UE without NR-DC operation and configured with per-UE measurement gap, measurement gap sharing shall be applies when UE requires measurement gaps to identify and measure cells on intra-frequency carriers or when SMTC configured for intra-frequency measurement are fully overlapping with per-UE measurement gaps, and when UE requires measurement gaps to identify and measure cells on inter-frequency carriers for both SSB and CSI-RS based L3 measurement, or when all of SMTC configured for inter-frequency SSB based measurement without measurement gaps are fully overlapping with per-UE measurement gaps, and/or inter-RAT E-UTRAN carriers, and/or inter-RAT UTRAN carriers for SRVCC, and when UE is configured to measure positioning frequency layers.

For NR standalone UE without NR-DC operation and configured with per-FR1 measurement gap, measurement gap sharing shall be applied when UE requires measurement gaps to identify and measure cells on FR1 intra-frequency carriers or when SMTC configured for FR1 intra-frequency measurement are fully overlapping with per-FR1 measurement gaps, and when UE requires measurement gaps to identify and measure cells on FR1 inter-frequency carriers for both SSB and CSI-RS based L3 measurement and/or inter-RAT E-UTRAN carriers, or when all of SMTC configured for inter-frequency SSB based measurement without measurement gaps are fully overlapping with per-FR1 measurement gaps, and/or inter-RAT UTRAN carriers for SRVCC, and when UE is configured to measure positioning frequency layers in FR1.

For NR standalone UE without NR-DC operation and configured with per-FR2 measurement gap, measurement gap sharing shall be applied when UE requires measurement gaps to identify and measure cells on FR2 intra-frequency carriers or when SMTC configured for FR2 intra-frequency measurement are fully overlapping with per-FR2 measurement gaps, and when UE requires measurement gaps to identify and measure cells on FR2 inter-frequency carriers for both SSB and CSI-RS based L3 measurement, or when all of SMTC configured for inter-frequency SSB based measurement without measurement gaps are fully overlapping with per-FR2 measurement gaps, and when UE is configured to measure positioning frequency layers in FR2.

When network signals "01", "10" or "11" with RRC parameter *MeasGapSharingScheme* [2] and the value of X is defined as in Table 9.1.2.1a-1, and

- $K_{intra} = 1 / X * 100$,
- $K_{inter} = 1 / (100 – X) * 100$,

When network signals "00" indicating equal splitting gap sharing, X is not applied.

The RRC parameter *MeasGapSharingScheme* shall be applied to the calculation of carrier specific scaling factor as specified in clause 9.1.5.2.2.

Table 9.1.2.1a-1: Value of parameter X for NR standalone measurement gap sharing

measGapSharingScheme	**Value of X (%)**
'00'	Equal splitting
'01'	25
'10'	50
'11'	75
Note: It is left to UE implementation to determine which measurement gap sharing scheme in the table *to be applied*, when *MeasGapSharingScheme is absent and there is* no stored value in the field.	

9.1.2.1b NE-DC: Measurement Gap Sharing

For NR-E-UTRA dual connectivity UE configured with per-UE measurement gap, measurement gap sharing shall be applied when UE requires measurement gaps to identify and measure cells on intra-frequency carriers or when SMTC configured for intra-frequency measurement are fully overlapping with per-UE measurement gaps, and when UE requires measurement gaps to identify and measure cells on inter-frequency carriers, E-UTRA gap-needed inter-frequency carriers for both SSB and CSI-RS based L3 measurement, or when all of SMTC configured for inter-frequency SSB based measurement without measurement gaps are fully overlapping with per-UE measurement gaps, and/or inter-RAT E-UTRA carriers, and/or inter-RAT UTRAN carriers for SRVCC, and when UE is configured to measure positioning frequency layers.

For NR-E-UTRA dual connectivity UE configured with per-FR1 measurement gap, measurement gap sharing shall be applied when UE requires measurement gaps to identify and measure cells on FR1 intra-frequency carriers or when SMTC configured for FR1 intra-frequency measurement are fully overlapping with per-FR1 measurement gaps, and when UE requires measurement gaps to identify and measure cells on inter-frequency carriers for both SSB and CSI-RS based L3 measurement, or when all of SMTC configured for inter-frequency SSB based measurement without measurement gaps are fully overlapping with per-FR1 measurement gaps, E-UTRA gap-needed inter-frequency carriers, and/or inter-RAT E-UTRA carriers, and/or inter-RAT UTRAN carriers for SRVCC, and when UE is configured to measure positioning frequency layers in FR1.

For NR-E-UTRA dual connectivity UE configured with per-FR2 measurement gap, measurement gap sharing shall be applied when UE requires measurement gaps to identify and measure cells on FR2 intra-frequency carriers or when SMTC configured for FR2 intra-frequency measurement are fully overlapping with per-FR2 measurement gaps, and when UE requires measurement gaps to identify and measure cells on FR2 inter-frequency carriers for both SSB and CSI-RS based L3 measurement, or when all of SMTC configured for inter-frequency SSB based measurement without measurement gaps are fully overlapping with per-FR2 measurement gaps, and when UE is configured to measure positioning frequency layers in FR2.

When network signals “01”, “10” or “11” with RRC parameter *measGapSharingConfig* [2][16] and the value of X is defined as in Table 9.1.2.1b-1, and

- $K_{intra} = 1 / X * 100$,
- $K_{inter} = 1 / (100 – X) * 100$,

When network signals “00” indicating equal splitting gap sharing, X is not applied.

The RRC parameter *MeasGapSharingScheme* shall be applied to the calculation of carrier specific scaling factor as specified in clause 9.1.5.2.3.

Table 9.1.2.1b-1: Value of parameter X for NE-DC measurement gap sharing

measGapSharingScheme	**Value of X (%)**
‘00’	Equal splitting
‘01’	25
‘10’	50
‘11’	75
Note: It is left to UE implementation to determine which measurement gap sharing scheme in the table *to be applied*, when *MeasGapSharingScheme is absent and there is* no stored value in the field.	

9.1.2.1c NR-DC: Measurement Gap Sharing

For UE with NR-DC operation and configured with per-UE measurement gap, measurement gap sharing shall be applies when UE required measurement gaps to identify and measure cells on intra-frequency carriers or when SMTC configured for intra-frequency measurement are fully overlapping with per-UE measurement gaps, and when UE requires measurement gaps to identify and measure cells on inter-frequency carriers for both SSB and CSI-RS based L3 measurement, and/or inter-RAT E-UTRAN carriers, or when all of SMTC configured for inter-frequency SSB based measurement without measurement gaps are fully overlapping with per-UE measurement gaps, and/or inter-RAT UTRAN carriers for SRVCC, and when UE is configured to measure positioning frequency layers.

For UE with NR-DC operation and configured with per-FR1 measurement gap, measurement gap sharing shall be applied when UE requires measurement gaps to identify and measure cells on FR1 intra-frequency carriers or when SMTC configured for FR1 intra-frequency measurement are fully overlapping with per-FR1 measurement gaps, and when UE requires measurement gaps to identify and measure cells on FR1 inter-frequency carriers for both SSB and CSI-RS based L3 measurement and/or inter-RAT E-UTRAN carriers, or when all of SMTC configured for inter-frequency SSB based measurement without measurement gaps are fully overlapping with per-FR1 measurement gaps, and/or inter-RAT UTRAN carriers for SRVCC, and when UE is configured to measure positioning frequency layers in FR1.

For UE with NR-DC operation and configured with per-FR2 measurement gap, measurement gap sharing shall be applied when UE requires measurement gaps to identify and measure cells on FR2 intra-frequency carriers or when SMTC configured for FR2 intra-frequency measurement are fully overlapping with per-FR2 measurement gaps, and when UE requires measurement gaps to identify and measure cells on FR2 inter-frequency carriers for both SSB and CSI-RS based L3 measurement, or when all of SMTC configured for inter-frequency SSB based measurement without measurement gaps are fully overlapping with per-FR2 measurement gaps, and when UE is configured to measure positioning frequency layers in FR2.

When network signals “01”, “10” or “11” with RRC parameter *measGapSharingConfig* [2] and the value of X is defined as in Table 9.1.2.1c-1, and

- $K_{intra} = 1 / X * 100$,
- $K_{inter} = 1 / (100 – X) * 100$,

When network signals “00” indicating equal splitting gap sharing, X is not applied.

The RRC parameter *MeasGapSharingScheme* shall be applied to the calculation of carrier specific scaling factor as specified in clause 9.1.5.2..4.

Table 9.1.2.1c-1: Value of parameter X for NR-DC measurement gap sharing

measGapSharingConfig	**Value of X (%)**
‘00’	Equal splitting
‘01’	25
‘10’	50
‘11’	75
Note:	It is left to UE implementation to determine which measurement gap sharing scheme in the table *to be applied*, when *MeasGapSharingScheme is absent and there is* no stored value in the field.

9.1.3 UE Measurement capability

9.1.3.1 EN-DC: Monitoring of multiple layers using gaps

The requirements in this clause are applicable for UE capable of and configured with the EN-DC operation mode.

When monitoring of multiple inter-frequency E-UTRAN, inter-RAT NR, GSM, UTRA FDD and UTRA TDD carriers as configured by E-UTRA PCell, and inter-frequency NR carriers (with or without CCA) as configured by PSCell using gaps (or without using gaps provided the UE supports such capability or the effective MGRP is applied for per-FR measurement gap capable UE) is configured, the UE shall be capable of performing one measurement of the configured measurement type (SS-RSRP, SS-RSRQ, SS-SINR, CSI-RSRP, CSI-RSRQ, CSI-SINR, SFTD, E-UTRAN RSRP, E-UTRAN RSRQ, E-UTRAN RS-SINR measurements, UTRAN TDD P-CCPCH RSCP, UTRAN FDD CPICH measurements, GSM carrier RSSI, etc.) of detected cells on all the layers.

For UE configured with the EN-DC operation, the effective total number of frequencies excluding the frequencies of the PSCell, SCells, E-UTRA PCell, and E-UTRA SCells being monitored is $N_{freq, EN-DC}$, which is defined as:

$$N_{freq, EN-DC} = N_{freq, EN-DC, NR} + N_{freq, EN-DC, E-UTRA} + N_{freq, EN-DC, UTRA} + M_{EN-DC, GSM},$$

where

$N_{freq, EN-DC, E-UTRA}$ is the number of E-UTRA inter-frequency carriers being monitored (FDD and TDD) as configured by E-UTRA PCell or via LPP [22],

$N_{freq, EN-DC, NR} \leq N_{freq, EN-DC, NR, inter-RAT} + N_{freq, EN-DC, NR, inter-freq}$

where

$N_{freq, EN-DC, NR, inter-RAT}$ is the number of NR inter-RAT carriers excluding NR serving carrier(s) being monitored as configured by E-UTRA PCell [15],

$N_{freq, EN-DC, NR, inter-freq}$ is the number of NR inter-frequency carriers being monitored as configured by PSCell,

$N_{freq, EN-DC, UTRA}$ is the number of UTRA inter-RAT carriers being monitored as configured by E-UTRA PCell (FDD and TDD).

$M_{EN-DC, GSM}$ is an integer which is a function of the number of GSM inter-RAT carriers as configured by E-UTRA PCell on which measurements are being performed. $M_{EN-DC, GSM}$ is equal to 0 if no GSM carrier is being monitored. For a MGRP of 40 ms, $M_{EN-DC, GSM}$ is equal to 1 if cells on up to 32 GSM carriers are being measured. For a MGRP of 80 ms, $M_{EN-DC, GSM}$ is equal to ceil($N_{carriers,GSM}$ /20) where $N_{carriers,GSM}$ is the number of GSM carriers on which cells are being measured.

9.1.3.1a SA: Monitoring of multiple layers using gaps

The requirements in this clause are applicable for UE configured with SA NR operation mode.

When monitoring of multiple inter-RAT E-UTRAN carriers, inter-frequency NR carriers (with or without CCA) and inter-RAT UTRA FDD carriers using gaps (or without using gaps provided the UE supports such capability or the effective MGRP is applied for per-FR measurement gap capable UE) is configured by PCell, the UE shall be capable of performing one measurement of the configured measurement type (SS-RSRP, SS-RSRQ, SS-SINR, CSI-RSRP, CSI-RSRQ, CSI-SINR, E-UTRAN RSRP, E-UTRAN RSRQ, E-UTRAN RS-SINR measurements, UTRAN FDD CPICH measurement, etc.) of detected cells on all the layers.

For UE configured with the NR SA operation, the effective total number of frequencies, excluding the frequencies of the PCell, PSCell and SCells being monitored, is $N_{freq, SA}$, which is defined as:

$$N_{freq, SA} = N_{freq, SA, NR} + N_{freq, SA, E-UTRA} + N_{freq, SA, UTRA},$$

where

$N_{freq, SA, E-UTRA}$ is the number of E-UTRA inter-RAT carriers being monitored (FDD and TDD) as configured by PCell or via LPP [22],

- $N_{freq, SA, UTRA}$ is the number of UTRA FDD inter-RAT carriers being monitored as configured by PCell,

$N_{freq, SA, NR}$ is the number of NR inter-frequency carriers being monitored as configured by PCell.

9.1.3.1b NE-DC: Monitoring of multiple layers using gaps

The requirements in this clause are applicable for UE capable of and configured with the NE-DC operation mode.

When monitoring of multiple inter-frequency E-UTRAN carriers as configured by E-UTRA PSCell, inter-RAT E-UTRAN carriers as configured by PCell, inter-RAT UTRA FDD carriers as configured by PCell, and inter-frequency NR carriers as configured by PCell using gaps (or without using gaps provided the UE supports such capability or the effective MGRP is applied for per-FR measurement gap capable UE) is configured, the UE shall be capable of performing one measurement of the configured measurement type (SS-RSRP, SS-RSRQ, SS-SINR, CSI-RSRP, CSI-RSRQ, CSI-SINR, SFTD, E-UTRAN RSRP, E-UTRAN RSRQ, and E-UTRAN RS-SINR measurements, UTRAN FDD CPICH measurements, etc.) of detected cells on all the layers.

For UE configured with the NE-DC operation, the effective total number of frequencies excluding the frequencies of the PCell, SCells, E-UTRA PSCell, and E-UTRA SCells being monitored is $N_{freq, NE-DC}$, which is defined as:

$$N_{freq, NE-DC} = N_{freq, NE-DC, NR} + N_{freq, NE-DC, E-UTRA} + N_{freq, NE-DC, UTRA},$$

where

$N_{freq, NE-DC, NR}$ is the number of NR inter-frequency carriers being monitored as configured by PCell,

$N_{freq, NE-DC, UTRA}$ is the number of UTRA FDD inter-RAT carriers being monitored as configured by PCell,

$N_{freq, NE-DC, E-UTRA} \leq N_{freq, NE-DC, E-UTRA, inter-RAT} + N_{freq, NE-DC, E-UTRA, inter-freq}$

where

$N_{freq, NE-DC, E-UTRA, inter-RAT}$ is the number of E-UTRA inter-RAT carriers (FDD and TDD) excluding E-UTRA serving carrier(s) being monitored as configured by PCell or via LPP [22],

$N_{freq, NE-DC, E-UTRA, inter-freq}$ is the number of E-UTRA inter-frequency carriers (FDD and TDD) being monitored as configured by E-UTRA PSCell [15] or via LPP [22].

9.1.3.1c NR-DC: Monitoring of multiple layers using gaps

The requirements in this clause are applicable for UE configured with NR-DC operation mode.

When monitoring of multiple inter-RAT E-UTRAN carriers and inter-frequency NR carriers using gaps (or without using gaps provided the UE supports such capability or the effective MGRP is applied for per-FR measurement gap capable UE) as configured by PCell, inter-RAT UTRA FDD carriers as configured by PCell, and inter-frequency NR carriers as configured by PSCell is configured, the UE shall be capable of performing one measurement of the configured measurement type (SS-RSRP, SS-RSRQ, SS-SINR, CSI-RSRP, CSI-RSRQ, CSI-SINR, E-UTRAN RSRP, E-UTRAN RSRQ, E-UTRAN RS-SINR measurements, UTRAN FDD CPICH measurements, etc.) of detected cells on all the layers.

For UE configured with the NR-DC operation, the effective total number of frequencies, excluding the frequencies of the PCell, PSCell and SCells being monitored, is $N_{freq, NR-DC}$, which is defined as:

$N_{freq, NR-DC} = N_{freq, NR-DC, NR} + N_{freq, NR-DC, E-UTRA} + N_{freq, NR-DC, UTRA}$,

where

- $N_{freq, NR-DC, E-UTRA}$ is the number of E-UTRA inter-RAT carriers being monitored (FDD and TDD) as configured by PCell or via LPP [22].
- $N_{freq, NE-DC, UTRA}$ is the number of UTRA FDD inter-RAT carriers being monitored as configured by PCell,
- $N_{freq, NR-DC, NR}$ is the number of NR inter-frequency carriers being monitored as configured by PCell and PSCell.

9.1.3.2 EN-DC: Maximum allowed layers for multiple monitoring

If a UE is configured with EN-DC operation, the UE shall be capable of monitoring at least:

- Depending on UE capability, 7 NR SSB inter-frequency carriers configured by PSCell, and
- Depending on UE capability, 8 NR inter-frequency carriers including SSB and CSI-RS in total configured by PSCell, and
- Depending on UE capability, 7 NR SSB inter-RAT carriers excluding NR serving carrier(s) configured by E-UTRA PCell [15], and
- Depending on UE capability, 6 E-UTRA TDD inter-frequency carriers configured by E-UTRA PCell [15], and
- Depending on UE capability, 6 E-UTRA FDD inter-frequency carriers configured by E-UTRA PCell [15], and
- Depending on UE capability, 3 FDD UTRA carriers, and
- Depending on UE capability, 3 TDD UTRA carriers, and
- Depending on UE capability, 32 GSM carriers (one GSM layer corresponds to 32 carriers), and
- Depending on UE capability, 1 E-UTRA FDD inter-frequency carrier for RSTD measurements configured via LPP [22], and

- Depending on UE capability, 1 E-UTRA TDD inter-frequency carrier for RSTD measurements configured via LPP [22].

In addition to the requirements defined above, the UE shall be capable of monitoring a total of at least 13 effective carrier frequency layers comprising of any above defined combination of NR, E-UTRA FDD, E-UTRA TDD, UTRA FDD, UTRA TDD and GSM (one GSM layer corresponds to 32 carriers) layers. The UE shall be capable of monitoring a total of at least 7 + N_{CSI} effective NR carrier frequency layers excluding NR serving carrier(s), comprising of any above defined combination of NR inter-RAT carriers excluding NR serving carrier(s) configured by E-UTRA PCell and NR inter-frequency carriers configured by PSCell, N_{CSI} equals 1 if UE supports CSI-RS based L3 measurement, and N_{CSI} =0 otherwise.

The number of SSB frequency layers configured by PSCell equals to the total number of MOs with

- *ssb-ConfigMobility* configured, or

- *ssb-ConfigMobility* not configured but *csi-rs-ResourceConfigMobility* configured with *associatedSSB.*

If *ssbfrequency, smtc1, smtc2* and *ssbSubcarrierSpacing* are same in multiple MOs, the multiple MOs are counted as one SSB frequency layer.

The number of CSI-RS frequency layers equals to the number of MOs with *csi-rs-ResourceConfigMobility* configured assuming single MO is configured per frequency layer.

When the E-UTRA PCell and PSCell configures the same NR carrier frequency layer to be monitored by the UE in synchronous intra-band EN-DC, this layer shall be counted only once to the total number of effective carrier frequency layers provided that the SFN-s and slot boundaries are aligned, unless the configured NR carrier frequency layers to be monitored have

- different RSSI measurement resources or

- different *deriveSSB-IndexFromCell* indications or

- different SMTC configurations or

- different *ssb-PositionQCL-Common-r16* indications or cell list of *ssb-PositionQCL* on NR carrier frequency layer with CCA or

- different *rmtc-Config-r16* indication on NR carrier frequency layer with CCA.

Note 1: The E-UTRA-NR dual connectivity capable UE configured with PSCell shall fulfil the requirements defined in only one of clause 9.1.3.2 and clause 8.1.2.1.1b.1 of TS 36.133 [15].

9.1.3.2a SA: Maximum allowed layers for multiple monitoring

If a UE is configured with SA NR operation mode, the UE shall be capable of monitoring at least:

- Depending on UE capability, 7 NR SSB inter-frequency carriers configured by PCell, and

- Depending on UE capability, 8 NR inter-frequency carriers including SSB and CSI-RS in total configured by PCell, and

- Depending on UE capability, 7 E-UTRA TDD inter-RAT carriers configured by PCell, and

- Depending on UE capability, 7 E-UTRA FDD inter-RAT carriers configured by PCell, and

- Depending on UE capability, 3 UTRA FDD inter-RAT carriers configured by PCell, and

- Depending on UE capability, 1 E-UTRA FDD inter-RAT carrier for RSTD measurements configured via LPP [22], and

- Depending on UE capability, 1 E-UTRA TDD inter-RAT carrier for RSTD measurements configured via LPP [22].

In addition to the requirements defined above, the UE shall be capable of monitoring a total of at least [13] effective carrier frequency layers comprising of any above defined combination of NR, E-UTRA FDD, E-UTRA TDD and UTRA FDD layers.

The number of SSB frequency layers equals to the total number of MOs with

- *ssb-ConfigMobility* configured, or
- *ssb-ConfigMobility* not configured but *csi-rs-ResourceConfigMobility* configured with *associatedSSB.*

If *ssbfrequency, smtc1, smtc2* and *ssbSubcarrierSpacing* are same in multiple MOs, the multiple MOs are counted as one SSB frequency layer.

The number of CSI-RS frequency layers equals to the number of MOs with *csi-rs-ResourceConfigMobility* configured assuming single MO is configured per frequency layer.

9.1.3.2b NE-DC: Maximum allowed layers for multiple monitoring

If a UE is configured with NE-DC operation mode, the UE shall be capable of monitoring at least:

- Depending on UE capability, 7 NR SSB inter-frequency carriers configured by PCell, and
- Depending on UE capability, 8 NR inter-frequency carriers including SSB and CSI-RS in total configured by PCell, and
- Depending on UE capability, 6 E-UTRA TDD inter-RAT carriers excluding E-UTRA serving carriers configured by PCell, and
- Depending on UE capability, 6 E-UTRA FDD inter-RAT carriers excluding E-UTRA serving carriers configured by PCell, and
- Depending on UE capability, 6 E-UTRA TDD inter-frequency carriers configured by E-UTRA PSCell [15], and
- Depending on UE capability, 6 E-UTRA FDD inter-frequency carriers configured by E-UTRA PSCell [15], and
- Depending on UE capability, 3 UTRA FDD inter-RAT carriers configured by PCell, and
- Depending on UE capability, 1 E-UTRA FDD inter-frequency carrier for RSTD measurements configured via LPP [22], and
- Depending on UE capability, 1 E-UTRA TDD inter-frequency carrier for RSTD measurements configured via LPP [22].

In addition to the requirements defined above, the UE shall be capable of monitoring a total of at least 13 effective carrier frequency layers comprising of any above defined combination of NR, E-UTRA FDD, E-UTRA TDD and UTRA FDD layers. The UE shall be capable of monitoring a total of at least 6 effective E-UTRA carrier frequency layers, excluding E-UTRA serving carrier(s), comprising of any above defined combination of E-UTRA inter-RAT carriers excluding E-UTRA serving carrier(s) configured by PCell and E-UTRA inter-frequency carriers configured by E-UTRA PSCell.

The number of SSB frequency layers configured by PCell equals to the total number of MOs with

- *ssb-ConfigMobility* configured, or
- *ssb-ConfigMobility* not configured but *csi-rs-ResourceConfigMobility* configured with *associatedSSB.*

If *ssbfrequency, smtc1, smtc2* and *ssbSubcarrierSpacing* are same in multiple MOs, the multiple MOs are counted as one SSB frequency layer.

The number of CSI-RS frequency layers equals to the number of MOs with *csi-rs-ResourceConfigMobility* configured assuming single MO is configured per frequency layer.

9.1.3.2c NR-DC: Maximum allowed layers for multiple monitoring

If a UE is configured with NR-DC operation, the UE shall be capable of monitoring at least:

- Depending on UE capability, 7 NR SSB inter-frequency carriers configured by PCell, and
- Depending on UE capability, 8 NR inter-frequency carriers including SSB and CSI-RS in total configured by PCell, and

- Depending on UE capability, 7 NR SSB inter-frequency carriers configured by PSCell, and
- Depending on UE capability, 8 NR inter-frequency carriers including SSB and CSI-RS in total configured by PSCell, and
- Depending on UE capability, 7 E-UTRA TDD inter-RAT carriers configured by PCell, and
- Depending on UE capability, 7 E-UTRA FDD inter-RAT carriers configured by PCell, and
- Depending on UE capability, 3 UTRA FDD inter-RAT carriers configured by PCell, and
- Depending on UE capability, 1 E-UTRA FDD inter-RAT carrier for RSTD measurements configured via LPP [22], and
- Depending on UE capability, 1 E-UTRA TDD inter-RAT carrier for RSTD measurements configured via LPP [22].

In addition to the requirements defined above, the UE shall be capable of monitoring a total of at least 13 effective carrier frequency layers comprising of any above defined combination of NR, E-UTRA FDD, E-UTRA TDD and UTRA FDD layers. The UE shall be capable of monitoring a total of at least $7 + N_{CSI}$ effective NR carrier frequency layers excluding NR serving carrier(s), which are configured by PCell and PSCell, N_{CSI} equals 1 if UE supports CSI-RS based L3 measurement, and N_{CSI} =0 otherwise.

The number of SSB frequency layers equals to the total number of MOs with

- *ssb-ConfigMobility* configured, or
- *ssb-ConfigMobility* not configured but *csi-rs-ResourceConfigMobility* configured with *associatedSSB.*

If *ssbfrequency*, *smtc1*, *smtc2* and *ssbSubcarrierSpacing* are same in multiple MOs, the multiple MOs are counted as one SSB frequency layer.

The number of CSI-RS frequency layers equals to the number of MOs with *csi-rs-ResourceConfigMobility* configured assuming single MO is configured per frequency layer.

When PCell and PSCell configures the same NR carrier frequency layer to be monitored by the UE in NR-DC, this layer shall be counted only once to the total number of effective carrier frequency layers provided that the SFN-s and slot boundaries are aligned, unless the configured NR carrier frequency layers to be monitored have

- different RSSI measurement resources or
- different *deriveSSB-IndexFromCell* indications or
- different SMTC configurations or
- different *ssb-PositionQCL-Common-r16* indications or cell list of *ssb-PositionQCL* on NR carrier frequency layer with CCA or
- different *rmtc-Config-r16* indication on NR carrier frequency layer with CCA.

9.1A.3.2 Void

9.1.3A UE Measurement capability under operation mode with CCA

9.1.3A.1 EN-DC: Monitoring of multiple layers using gaps under CCA

The requirements in clause 9.1.3.1 are also applicable for the UE capable of and configured with the EN-DC operation mode with CCA on PSCC.

9.1.3A.1a SA: Monitoring of multiple layers using gaps under CCA

The requirements in clause 9.1.3.1a are also applicable for UE configured with SA NR operation mode with CCA on PCC.

9.1.3A.2 EN-DC: Maximum allowed layers for multiple monitoring under CCA

If a UE is configured with EN-DC operation when CCA is used on PSCell, the UE shall be capable of monitoring at least:

- Depending on UE capability, 7 NR inter-frequency carriers configured by PScell, and
- Depending on UE capability, 7 NR inter-RAT carriers excluding NR serving carrier(s) configured by E-UTRA PCell [15], and
- Depending on UE capability, 6 E-UTRA TDD inter-frequency carriers configured by E-UTRA PCell [15], and
- Depending on UE capability, 6 E-UTRA FDD inter-frequency carriers configured by E-UTRA PCell [15], and
- Depending on UE capability, 3 FDD UTRA carriers, and
- Depending on UE capability, 3 TDD UTRA carriers, and
- Depending on UE capability, 32 GSM carriers (one GSM layer corresponds to 32 carriers), and

In addition to the requirements defined above, the UE shall be capable of monitoring a total of at least 13 effective carrier frequency layers comprising of any above defined combination of NR, E-UTRA FDD, E-UTRA TDD, UTRA FDD, UTRA TDD and GSM (one GSM layer corresponds to 32 carriers) layers. The UE shall be capable of monitoring a total of at least 7 effective NR carrier frequency layers excluding NR serving carrier(s), comprising of any above defined combination of NR inter-RAT carriers excluding NR serving carrier(s) configured by E-UTRA PCell and NR inter-frequency carriers configured by PSCell.

When the E-UTRA PCell and PSCell configures the same NR carrier frequency layer to be monitored by the UE in synchronous intra-band EN-DC, this layer shall be counted only once to the total number of effective carrier frequency layers provided that the SFN-s and slot boundaries are aligned, unless the configured NR carrier frequency layers to be monitored have

- different RSSI measurement resources or
- different *deriveSSB-IndexFromCell* indications or
- different SMTC configurations or
- different *ssb-PositionQCL-Common-r16* indications or cell list of *ssb-PositionQCL* on NR carrier frequency layer with CCA or
- different *rmtc-Config-r16* indication on NR carrier frequency layer with CCA.

9.1.3A.2a SA: Maximum allowed layers for multiple monitoring under CCA

If a UE is configured with SA NR operation mode when CCA is used on PCell or SCell only, the UE shall be capable of monitoring at least:

- Depending on UE capability, 7 NR inter-frequency carriers configured by PCell, and
- Depending on UE capability, 7 E-UTRA TDD inter-RAT carriers configured by PCell, and
- Depending on UE capability, 7 E-UTRA FDD inter-RAT carriers configured by PCell, and

In addition to the requirements defined above, the UE shall be capable of monitoring a total of at least [13] effective carrier frequency layers comprising of any above defined combination of NR, E-UTRA FDD and E-UTRA TDD layers.

9.1.3C UE Measurement capability under operation mode with satellite access

Editor's note: Applicability of frequency range, CA, DA, duplex mode, inter-RAT measurement, etc is subject to updates/changes based on the scope of the corresponding WID.

Editor's note: Terminology will be further clarified and selected between, e.g. NTN and satellite access, based on further agreements.

9.1.3C.1a SA: Monitoring of multiple layers using gaps under satellite access

The requirements in this clause are applicable for UE configured with only PCell, which is served by SAN.

When monitoring of multiple SAN carriers and TN carriers using gaps (or without using gaps provided the UE supports such capability) is configured by PCell, the UE shall be capable of performing one measurement of the configured measurement type (SS-RSRP, SS-RSRQ, SS-SINR, CSI-RSRP, CSI-RSRQ, CSI-SINR) of detected cells on all the layers.

Note: for a cell served by SAN, the UE could only be configured to measure SS-RSRP, SS-RSRQ, SS-SINR.

For the UE configured with NR SA operation mode with only PCell served by SAN, the effective total number of frequencies, excluding the frequencies of the serving cell being monitored, is $N_{freq, SA}$, which is defined as:

$$N_{freq, SA} = N_{freq, SA, SAN} + N_{freq, SA, TN},$$

where

- $N_{freq, SA, SAN}$ is the number of SAN carriers being monitored as configured by the serving cell served by SAN,

  $N_{freq, SA, TN}$ is the number of TN carriers being monitored as configured by the serving cell served by SAN.

9.1.3C.2a SA: Maximum allowed layers for multiple monitoring for SAN

If a UE is configured with NR SA operation mode with SAN serving cell, the UE shall be capable of monitoring at least:

- Depending on UE capability, 3 NR SAN carriers including serving carrier, and
- Depending on UE capability, 7 NR SAN and TN carriers including serving carrier,
  - The total number of NR SAN and TN carriers does not apply to VSAT UE.

FFS: the number of effective frequency layers UE shall be capable to monitor.

9.1.4 Capabilities for Support of Event Triggering and Reporting Criteria

9.1.4.1 Introduction

This clause contains requirements on UE capabilities for support of event triggering and reporting criteria. As long as the measurement configuration does not exceed the requirements stated in clause 9.1.4.2, the UE shall meet all other performance requirements defined in clause 9 and clause 10. The requirements in this clause also apply for a UE in EN-DC with PSCell on a carrier frequency with CCA or SA NR with PCell on a carrier frequency with CCA.

The UE can be requested to make measurements under different measurement identities defined in TS 38.331 [2]. Each measurement identity corresponds to either event-based reporting, periodic reporting, or no reporting. In case of event-based reporting, each measurement identity is associated with an event triggering criterion. In case of periodic reporting, a measurement identity is associated with one periodic reporting criterion. In case of no reporting, a measurement identity is associated with one no reporting criterion.

The purpose of this clause is to set some limits on the number of different event triggering, periodic, and no reporting criteria the UE may be requested to track in parallel.

9.1.4.2 Requirements

In this clause a reporting criterion corresponds to either one event (in the case of event-based reporting), or one periodic reporting criterion (in case of periodic reporting), or one no reporting criterion (in case of no reporting). For event-based reporting, each instance of event, with the same or different event identities, is counted as separate reporting criterion in Table 9.1.4.2-1.

The UE shall be able to support in parallel per category up to E_{cat} reporting criteria according to Table 9.1.4.2-1. For the measurement categories belonging to intra-frequency, inter-frequency, and inter-RAT measurements (i.e. without counting other categories that the UE shall always support in parallel), the UE need not support more than the total number of reporting criteria as follows:

- For UE configured with EN-DC: $E_{cat,EN-DC,NR} + E_{cat,EN-DC,E-UTRA}$, where

  $E_{cat,EN-DC,NR} = 10 + 9 \times n$ is the total number of NR reporting criteria configured by PSCell (NR intra- and inter-frequency reporting criteria) and by E-UTRA PCell on NR serving frequencies (NR intra-frequency reporting criteria) applicable for UE configured with EN-DC according to Table 9.1.4.2-1, and n is the number of configured NR serving frequencies, including PSCell and SCells carrier frequencies,

  $E_{cat,EN-DC,E-UTRA}$ is the total number of reporting criteria configured by E-UTRA PCell except PSCell and SCells carrier frequencies, as specified in TS 36.133 [15] for UE configured with EN-DC.

- For UE configured with NE-DC: $E_{cat,NE-DC,NR} + E_{cat,NE-DC,E-UTRA}$, where

  $E_{cat,NE-DC,NR} = 10 + 9 \times n$ is the total number of NR reporting criteria according to Table 9.1.4.2-1, and n is the number of configured NR serving frequencies, including PCell and SCells carrier frequencies,

  $E_{cat,NE-DC,E-UTRA} = E_{cat,NE-DC,E-UTRA,inter-RAT} + E_{cat,NE-DC,E-UTRA,intra-RAT}$, where

  $E_{cat,NE-DC,E-UTRA,inter-RAT}$ is the total number of inter-RAT E-UTRA reporting criteria configured by PCell except E-UTRA PSCell and E-UTRA SCells carrier frequencies, according to Table 9.1.4.2-1,

  $E_{cat,NE-DC,E-UTRA,intra-RAT}$ is the total number of E-UTRA reporting criteria including E-UTRA PSCell and E-UTRA SCells carrier frequencies as specified in TS 36.133 [15] for UE configured with NE-DC.

- For UE configured with SA operation mode: $E_{cat,SA,NR} + E_{cat,SA,E-UTRA}$, where

  $E_{cat,SA,NR} = 10 + 9 \times n$ is the total number of NR reporting criteria according to Table 9.1.4.2-1, and n is the number of configured NR serving frequencies, including PCell, and SCells carrier frequencies,

  $E_{cat,SA,E-UTRA}$ is the total number of inter-RAT E-UTRA reporting criteria according to Table 9.1.4.2-1.

- For UE configured with NR-DC: $E_{cat,NR-DC,NR} + E_{cat,NR-DC,E-UTRA}$, where

  $E_{cat,NR-DC,NR} = 10 + 9 \times n$ is the total number of NR reporting criteria according to Table 9.1.4.2-1, and n is the number of configured NR serving frequencies, including PCell, PSCell and SCells carrier frequencies,

  $E_{cat,NR-DC,E-UTRA}$ is the total number of inter-RAT E-UTRA reporting criteria according to Table 9.1.4.2-1.

Table 9.1.4.2-1: Requirements for reporting criteria per measurement category

Measurement category	E_{cat}	Note
Intra-frequency Note 1,2,3,4,5	9	Events for any one or a combination of intra-frequency SS-RSRP, SS-RSRQ, SS-SINR, CSI-RSRP, CSI-RSRQ, and CSI-SINR for NG-RAN intra-frequency cells
Inter-frequency Note 2,3,4,5	10	Events for any one or a combination of inter-frequency SS-RSRP, SS-RSRQ, SS-SINR, CSI-RSRP, CSI-RSRQ, and CSI-SINR for NG-RAN inter-frequency cells
Inter-RAT (E-UTRA FDD, E-UTRA TDD) Note 2,4,5	10	Only applicable for UE with this (inter-RAT) capability. These reporting criteria apply for any E-UTRA carrier frequencies other than the carrier frequency of the E-UTRA PSCell or E-UTRA SCell.

Inter-RAT (E-UTRA FDD, E-UTRA TDD) RSTD Note 2,4,5	1	Inter-RAT RSTD measurement reporting for UE supporting OTDOA; 1 report capable of minimum 16 inter-RAT cell measurements. Only applicable for UE with this (inter-RAT RSTD via LPP [22]) capability. These reporting criteria apply for any E-UTRA carrier frequencies other than the carrier frequency of the E-UTRA PSCell or E-UTRA SCell.
Inter-RAT (E-UTRA FDD, E-UTRA TDD) RSRP and RSRQ measurements for E-CID Note 2,4,5	1	Inter-RAT RSRP and RSRQ measurements for E-CID reported to E-SMLC via LPP [22]. One report capable of at least in total 10 inter-RAT RSRP and RSRQ measurements. Applicable to UE capable of reporting inter-RAT RSRP and RSRQ to E-SMLC via LPP. These reporting criteria apply for any E-UTRA carrier frequencies other than the carrier frequency of the E-UTRA PSCell or E-UTRA SCell.
Intra-frequency RSSI and channel occupancy measurements with CCA Note 1,2,3	1	One report capable of one RSSI and one channel occupancy measurements over a channel [TS 37.213] with CCA. Applicable for UE capable of performing and reporting RSSI and channel occupancy on carrier frequencies under CCA.
Inter-frequency RSSI and channel occupancy measurements with CCA Note 2,3	1	One report capable of one RSSI and one channel occupancy measurements over a channel [TS 37.213] with CCA. Applicable for UE capable of performing and reporting RSSI and channel occupancy on carrier frequencies under CCA.
Intra-frequency SSB-based measurements for NR E-CID Note 1,2,3,4,5	1	Intra-frequency SS-RSRP and SS-RSRQ measurements for NR E-CID reported to LMF via LPP [34]. One report capable of at least in total 9 intra-frequency SS-RSRP and SS-RSRQ measurements. Applicable to UE capable of reporting at least one of SS-RSRP and SS-RSRQ to LMF via LPP.
Intra-frequency CSI-RS based measurements for NR E-CID Note 1,2,3,4,5	1	Intra-frequency CSI-RSRP and CSI-RSRQ measurements for NR E-CID reported to LMF via LPP [22]. One report capable of at least in total 9 intra-frequency CSI-RSRP and/or CSI-RSRQ measurements. Applicable to UE capable of reporting any of CSI-RSRP and CSI-RSRQ to LMF via LPP, as indicated in *nr-ECID-MeasSupported-r16*.
Inter-frequency SSB-based measurements for NR E-CID Note 2,3,4,5	1	Inter-frequency SS-RSRP and SS-RSRQ measurements for NR E-CID reported to LMF via LPP [34]. One report capable of at least in total 10 inter-frequency SS-RSRP and SS-RSRQ measurements. Applicable to UE capable of reporting at least one of SS-RSRP and SS-RSRQ to LMF via LPP.
Inter-frequency CSI-RS based measurements for NR E-CID Note 2,3,4,5	1	Inter-frequency CSI-RSRP and CSI-RSRQ measurements for NR E-CID reported to LMF via LPP [22]. One report capable of at least in total 10 inter-frequency CSI-RSRP and CSI-RSRQ measurements. Applicable to UE capable of reporting any of CSI-RSRP and CSI-RSRQ to LMF via LPP, as indicated in *nr-ECID-MeasSupported-r16*.

DL RSTD Note 2,4,5	1	DL RSTD measurement reporting; 1 report capable of multiple (within the UE PRS measurement capability, *nr-DL-TDOA-MeasCapability*, indicated via LPP [34]) DL RSTD measurements and if supported also multiple corresponding DL PRS-RSRP measurements configured for DL-TDOA. Only applicable for UE capable of reporting measurements for DL-TDOA to LMF via LPP [34].
UE Rx-Tx Note 2,4,5	1	UE Rx-Tx measurement reporting; 1 report capable of multiple (within the UE PRS measurement capability, *nr-DL-PRS-MeasCapability*, indicated via LPP [34] for multi-RTT) UE Rx-Tx measurements and if supported also multiple corresponding DL PRS-RSRP measurements configured for multi-RTT. Only applicable for UE capable of reporting measurements for multi-RTT to LMF via LPP [34].
DL PRS-RSRP Note 2,4,5	1	DL PRS-RSRP measurement reporting; 1 report capable of multiple (within the UE PRS measurement capability, *nr-DL-PRS-MeasCapability*, indicated via LPP [34] for AoD) DL PRS-RSRP measurements configured for DL-AoD. Only applicable for UE capable of reporting measurements for DL-AoD to LMF via LPP [34].
SRS-RSRP Note 2,3,4,5	1	SRS-RSRP measurement reporting for CLI; 1 report capable of up to 32 SRS resources measurements. Only applicable for UE supporting *cli-SRS-RSRP-Meas-r16*.
CLI-RSSI Note 2,3,4,5	1	CLI-RSSI measurement reporting for CLI; 1 report capable of up to 64 CLi-RSSI resources measurements. Only applicable for UE supporting *cli-RSSI-Meas-r16*.
NOTE 1: When the UE is configured with PSCell and SCell carrier frequencies, E_{cat} for Intra-frequency is applied per corresponding NR serving frequency. NOTE 2: Applicable for UE configured with SA NR operation mode. NOTE 3: Applicable for UE configured with EN-DC operation mode. NOTE 4: Applicable for UE configured with NE-DC operation mode. NOTE 5: Applicable for UE configured with NR-DC operation mode.		

9.1.5 Carrier-specific scaling factor

This clause specifies the derivation of carrier-specific scaling factor (CSSF) values, which scales the measurement delay requirements given in clause 9.2, 9.2A, 9.3, 9.3A, 9.4, and NR PRS-based positioning measurements in clause 9.9 and CSI-RS based L3 measurement in clause 9.10 when UE is configured to monitor multiple measurement objects. The CSSF values are categorized into $CSSF_{outside_gap,i}$ and $CSSF_{within_gap,i}$, for the measurements conducted outside measurement gaps and within measurement gaps, respectively.

If concurrent measurement gaps are configured by the network, subject to UE capability, the term concurrent measurement gap(s) in the following clauses refer to non-dropped measurement gap occasions after accounting for measurment gap collisions as specified in clause 9.1.8.3 from all the configured measurement gap patterns.

9.1.5.1 Monitoring of multiple layers outside gaps

For a UE supporting concurrent gaps and when concurrent gaps are configured the carrier-specific scaling factor $CSSF_{outside_gap,i}$ for measurement object *i* derived in this chapter is applied to following measurement types :

- SSB-based intra-frequency measurement with no measurement gap in clause 9.2.5 and 9.2A.5, when none of the SMTC occasions of this intra-frequency measurement object are overlapped by the measurement gap or concurrent measurement gaps.

- SSB-based intra-frequency measurement with no measurement gap in clause 9.2.5 and 9.2A.5, when part of the SMTC occasions of this intra-frequency measurement object are overlapped by the measurement gap or concurrent measurement gaps.

- CSI-RS based intra-frequency measurement in clause 9.10.2, when none of CSI-RS resources for L3 measurement of this intra-frequency measurement object are overlapped by the measurement gap or concurrent measurement gaps.

- CSI-RS based intra-frequency measurement in clause 9.10.2, when all CSI-RS resources for L3 measurement of this intra-frequency measurement object are partially overlapped by the measurement gap or concurrent measurement gaps.

- SSB-based inter-frequency measurement with no measurement gap in clause 9.3.9, when none of the SMTC occasions of this inter-frequency measurement object are overlapped by the measurement gap or concurrent measurement gaps, if UE supports *interFrequencyMeas-NoGap-r16* and the flag *interFrequencyConfig-NoGap-r16* is configured by the Network.

- SSB-based inter-frequency measurement with no measurement gap in clause 9.3.9, when part of the SMTC occasions of this inter-frequency measurement object are overlapped by the measurement gap or concurrent measurement gaps, if UE supports *interFrequencyMeas-NoGap-r16* and the flag *interFrequencyConfig-NoGap-r16* is configured by the Network.

Otherwise, the carrier-specific scaling factor $CSSF_{outside_gap,i}$ for measurement object *i* derived in this chapter is applied to following measurement types:

- SSB-based intra-frequency measurement with no measurement gap in clause 9.2.5 and 9.2A.5, when none of the SMTC occasions of this intra-frequency measurement object are overlapped by the measurement gap or concurrent measurement gaps.

- SSB-based intra-frequency measurement with no measurement gap in clause 9.2.5 and 9.2A.5, when part of the SMTC occasions of this intra-frequency measurement object are overlapped by the measurement gap or concurrent measurement gaps.

- For a UE in E-UTRA-NR dual connectivity operation, NR SSB-based inter-RAT measurement object configured by the E-UTRAN PCell on an NR serving carrier

  - the SSB is completely contained in the active BWP of the UE, and

  - none or part of the SMTC occasions of this inter-RAT measurement object are overlapped by the measurement gap or concurrent measurement gaps.

- CSI-RS based intra-frequency measurement in clause 9.10.2, when none of CSI-RS resources for L3 measurement of this intra-frequency measurement object are overlapped by the measurement gap or concurrent measurement gaps.

- CSI-RS based intra-frequency measurement in clause 9.10.2, when all CSI-RS resources for L3 measurement of this intra-frequency measurement object are partially overlapped by the measurement gap or concurrent measurement gaps.

- SSB-based inter-frequency measurement with no measurement gap in clause 9.3.9, when none of the SMTC occasions of this inter-frequency measurement object are overlapped by the measurement gap or concurrent measurement gaps, if UE supports *interFrequencyMeas-NoGap-r16* and the flag *interFrequencyConfig-NoGap-r16* is configured by the Network.

- SSB-based inter-frequency measurement with no measurement gap in clause 9.3.9, when part of the SMTC occasions of this inter-frequency measurement object are overlapped by the measurement gap or concurrent measurement gaps, if UE supports *interFrequencyMeas-NoGap-r16* and the flag *interFrequencyConfig-NoGap-r16* is configured by the Network.

- For a UE in E-UTRA-NR dual connectivity operation, NR SSB-based inter-RAT measurement object configured by the E-UTRAN PCell on an NR serving carrier

- the SSB is completely contained in the active BWP of the UE, and
- none or part of the SMTC occasions of this inter-RAT measurement object are overlapped by the measurement gap;

- Intra-frequency RSSI and channel occupancy measurement with no measurement gap on a carrier subject to CCA when SMTC and RMTC are overlapping and RMTCs are not fully overlapped with measurement gap.

UE is expected to conduct the measurement of this measurement object *i* only outside the measurement gaps.

For a UE in E-UTRA-NR dual connectivity operation, if a measurement object configured by PSCell and an NR inter-RAT measurment object configured by E-UTRAN PCell are on the same serving carrier, they shall be counted as one intra-frequency measurement object, provided that they meet the measurement object merging conditions [in clause 9.1.3.2].

The number of frequency layers for SSB measurements shall include the total number of MOs with

- *ssb-ConfigMobility* configured, or
- *ssb-ConfigMobility* not configured but *csi-rs-ResourceConfigMobility* configured with *associatedSSB.*

If *ssbfrequency, smtc1, smtc2* and *ssbSubcarrierSpacing* are same in multiple MOs, the multiple MOs are counted as one SSB frequency layer.

If the higher layer signaling in TS 38.331 [2] of *smtc2* is present and *smtc1* is fully overlapping with measurement gaps and *smtc2* is partially overlapping with measurement gaps, $CSSF_{outside_gap,i}$ and requirements derived from $CSSF_{outside_gap,i}$ are not specified.

The UE cell identification and measurement periods derived based on $CSSF_{outside_gap,i}$ in clauses 9.2.5.1, 9.2.5.2 and 9.10.2 may be extended for measurement objects of which the cell identification and measurement periods are overlapped with $T_{measure_SFTD1}$ specified in clause 9.3.8 when no measurement gaps are provided.

The requirements in this clause apply provided that

- The SMTC on all CCs and inter-frequency layers without measurement gap in FR2 have the same offset, and one of following conditions is met
  - If *smtc2* is configured on any FR2 CC,
    - All CCs have the same configuration for *smtc1*, and
    - All CCs configured with *smtc2* have the same configuration for *smtc2*
  - If *smtc2* is not configured on any FR2 CC,
    - The total number of different SMTC periodicities on all serving CCs and inter-frequency layers without measurement gap does not exceed 4
- The starting point of the first 5ms window for CSI-RS measurement as defined in clause 9.10.1 on all CCs in FR2 is same and one of following conditions is met
  - If any CSI-RS resource is configured in the second 5ms window for CSI-RS measurement as defined in clause 9.10.1 on any FR2 CC,
    - All CCs with CSI-RS resources only in the first 5ms window have the same CSI-RS resource periodcity, and
    - All CCs with CSI-RS resources both in the first and the second 5ms window have the same CSI-RS resource periodcity
  - If no CSI-RS resource is configured in the second 5ms window for CSI-RS measurement as defined in clause 9.10.1 on any FR2 CC,
    - The total number of different CSI-RS resources periodicities on all serving CCs does not exceed 3Note: Longer delays for cell identification and measurement periods derived based on $CSSF_{outside_gap,i}$ in clauses 9.2.5.1, 9.2.5.2, can be expected, if the UE is configured with more than 4 different SMTC periodicities

on FR2 serving carriers. The longer delay applies for the FR2 intra-frequency measurement objects with the longest SMTC periodicity/periodicities.

9.1.5.1.1 EN-DC mode: carrier-specific scaling factor for SSB-based, CSI-RS based L3 measurements and RSSI and channel occupancy measurements performed outside gaps

For UE configured with the E-UTRA-NR dual connectivity operation, the carrier-specific scaling factor $CSSF_{outside_gap,i}$ for intra-frequency SSB-based measurements, inter-frequency SSB-based measurements performed outside measurements gaps, intra-frequency CSI-RS L3 measurement and RSSI/channel occupancy measurement with no measurement gap on a carrier subject to CCA when SMTC and RMTC are overlapping will be as specified in Table 9.1.5.1.1-1.

Table 9.1.5.1.1-1: $CSSF_{outside_gap,i}$ scaling factor for EN-DC mode

Scenario	$CSSF_{outside_gap,i}$ for FR1 PSCC	$CSSF_{outside_gap,i}$ for FR1 SCC	$CSSF_{outside_gap,i}$ for FR2 PSCC	$CSSF_{outside_gap,i}$ for FR2 SCC where neighbour cell measurement is required Note 2	$CSSF_{outside_gap,i}$ for FR2 SCC where neighbour cell measurement is not required	$CSSF_{outside_gap,i}$ for inter-frequency MO with no measurement gp
EN-DC with FR1 only CA	$1+N_{PSCC_CSIRS}+N_{PSCC_CCA_RSSI/CO}$	$N_{SCC_SSB}+Y+2xN_{SCC_CSIRS}+N_{SCC_CCA_RSSI/CO}$	N/A	N/A	N/A	$N_{SCC_SSB}+Y+2xN_{SCC_CSIRS}$
EN-DC with FR2 only intra band CA	N/A	N/A	$1+N_{PSCC_CSIRS}$	N/A	$N_{SCC_SSB}+Y+2xN_{SCC_CSIRS}$	$N_{SCC_SSB}+Y+2xN_{SCC_CSIRS}$
EN-DC with FR2 only inter band CA	N/A	N/A	$1+N_{PSCC_CSIRS}$	$2x(1+N_{SCC_CSIRS_FR2_NCM})$ Note 3,5	$2\times(N_{SCC_SSB}+Y+2xN_{SCC_CSIRS}-1-N_{SCC_CSIRS_FR2_NCM})$	$2\times(N_{SCC_SSB}+Y+2xN_{SCC_CSIRS}-1-N_{SCC_CSIRS_FR2_NCM})$
EN-DC with FR1 +FR2 CA (FR1 PSCell) Note 1	$1+N_{PSCC_CSIRS}$	$2\times(N_{SCC_SSB}+Y+2xN_{SCC_CSIRS}-1-N_{SCC_CSIRS_FR2_NCM})$	N/A	$2x(1+N_{SCC_CSIRS_FR2_NCM})$ Note 3	$2\times(N_{SCC_SSB}+Y+2xN_{SCC_CSIRS}-1-N_{SCC_CSIRS_FR2_NCM})$	$2\times(N_{SCC_SSB}+Y+2xN_{SCC_CSIRS}-1-N_{SCC_CSIRS_FR2_NCM})$
EN-DC with FR1 +FR2 CA (FR2 PSCell) Note 1	N/A	$N_{SCC_SSB}+Y+2xN_{SCC_CSIRS}$	$1+N_{PSCC_CSIRS}$	N/A	$N_{SCC_SSB}+Y+2xN_{SCC_CSIRS}$	$N_{SCC_SSB}+Y+2xN_{SCC_CSIRS}$

Note 1: Only one NR FR1 operating band and one NR FR2 operating band are included for FR1+FR2 inter-band EN-DC.
Note 2: Selection of FR2 SCC where neighbour cell measurement is required follows clause 9.2.3.2.
Note 3: $CSSF_{outside_gap,i}$ =1 if only one SCell is configured and no inter-frequency MO without gap and only SSB based L3 measurement is configured on SCC; $CSSF_{outside_gap,i}$ =2 if only one SCell is configured and no inter-frequency MO without gap and either both SSB and CSI-RS based L3 configured or only CSI-RS based L3 measurement is configured on SCC.
Note 4: Y is the number of configured inter-frequency MOs without MG that are being measured outside of MG; otherwise, it is 0.
Note 5: Only two NR FR2 operating band are included for EN-DC with FR2 only inter-band CA
Note 6: N_{PSCC_CSIRS}=1 if PSCC is with either both SSB and CSI-RS based L3 configured or only CSI-RS based L3 measurement configured; otherwise, N_{PSCC_CSIRS} =0.
Note 7: N_{SCC_CSIRS}=Number of configured SCell(s) with either both SSB and CSI-RS based L3 measurement configured or only CSI-RS based L3 measurement configured
Note 8: $N_{SCC_CSIRS_FR2_NCM}$=1 if FR2 SCC, where neighbour cell measurement is required, is with either both SSB and CSI-RS configured or only CSI-RS measurement configured; otherwise, $N_{SCC_CSIRS_FR2_NCM}$=0.
Note 9: N_{SCC_SSB}=Number of configured SCell(s) with only SSB based L3 measurement configured, which is measured without MG.
Note 10: $N_{PSCC_CCA_RSSI/CO}$= 1 if PSCC is configured with RSSI/CO measurements without MG when RMTC and SMTC are overlapping; $N_{SCC_CCA_RSSI/CO}$ = Number of MOs for SCell(s) configured with RSSI/CO measurements without MG when RMTC and SMTC are overlapping.
Note 11 If a measurement object configured by PSCell and an NR inter-RAT measurment object configured by E-UTRAN PCell are on the same serving carrier, they shall be counted as one intra-frequency measurement object, provided that they meet the measurement object merging conditions [in clause 9.1.3.2], otherwise they are counted separately as two measurement objects.

9.1.5.1.2 SA mode: carrier-specific scaling factor for SSB-based, CSI-RS based L3 measurements and RSSI and channel occupancy measurements performed outside gaps

For UE in SA operation mode, the carrier-specific scaling factor $CSSF_{outside_gap,i}$ for intra-frequency SSB-based measurements, inter-frequency SSB-based measurements performed outside measurements gaps, intra-frequency CSI-RS L3 measurement and RSSI/channel occupancy measurement with no measurement gap on a carrier subject to CCA when SMTC and RMTC are overlapping will be as specified in Table 9.1.5.1.2-1, which shall also be applied for a UE configured with NE-DC operation.

Table 9.1.5.1.2-1: $CSSF_{outside_gap,i}$ scaling factor for SA mode

Scenario	$CSSF_{outside_gap,i}$ for FR1 PCC	$CSSF_{outside_gap,i}$ for FR1 SCC	$CSSF_{outside_gap,i}$ for FR2 PCC	$CSSF_{outside_gap,i}$ for FR2 SCC where neighbour cell measurement is required	$CSSF_{outside_gap,i}$ for FR2 SCC where neighbour cell measurement is not required	$CSSF_{outside_gap,i}$ for inter-frequency MO with no measurement gap
FR1 only CA	$1+N_{PCC_CSIRS}+N_{PCC_CCA_RSSI/CO}$	$N_{SCC_SSB}+Y+2x N_{SCC_CSIRS}+N_{SCC_CCA_RSSI/CO}$	N/A	N/A	N/A	$N_{SCC_SSB}+Y+2x N_{SCC_CSIRS}$
FR2 only intra band CA	N/A	N/A	$1+N_{PCC_CSIRS}$	N/A	$N_{SCC_SSB}+Y+2x N_{SCC_CSIRS}$	$N_{SCC_SSB}+Y+2x N_{SCC_CSIRS}$
FR2 only inter band CA	N/A	N/A	$1+N_{PCC_CSIRS}$	$2*(1+N_{SCC_CSIRS_FR2_NCM})$ Note 3,5	$2\times(N_{SCC_SSB}+Y+2x N_{SCC_CSIRS}-1-N_{SCC_CSIRS_FR2_NCM})$	$2\times(N_{SCC_SSB}+Y+2x N_{SCC_CSIRS}-1-N_{SCC_CSIRS_FR2_NCM})$
FR1 +FR2 CA (FR1 PCell) Note 1	$1+N_{PCC_CSIRS}$	$2\times(N_{SCC_SSB}+Y+2* N_{SCC_CSIRS}-1-N_{SCC_CSIRS_FR2_NCM})$	N/A	$2x(1+N_{SCC_CSIRS_FR2_NCM})$ Note 3,5	$2\times(N_{SCC_SSB}+Y+2x N_{SCC_CSIRS}-1-N_{SCC_CSIRS_FR2_NCM})$	$2\times(N_{SCC_SSB}+Y+2x N_{SCC_CSIRS}-1-N_{SCC_CSIRS_FR2_NCM})$
FR1 +FR2 CA (FR2 PCell) Note 1	N/A	$N_{SCC_SSB}+Y+2x N_{SCC_CSIRS}$	$1+N_{PCC_CSIRS}$	N/A	$N_{SCC_SSB}+Y+2x N_{SCC_CSIRS}$	$N_{SCC_SSB}+Y+2x N_{SCC_CSIRS}$

Note 1: Only one FR1 operating band and one FR2 operating band are included for FR1+FR2 inter-band CA.
Note 2: Selection of FR2 SCC where neighbour cell measurement is required follows clause 9.2.3.2.
Note 3: $CSSF_{outside_gap,i}$ =1 if only one SCell is configured and no inter-frequency MO without gap and only SSB based L3 measurement is configured on SCC; $CSSF_{outside_gap,i}$ =2 if only one SCell is configured and no inter-frequency MO without gap and either both SSB and CSI-RS based L3 configured or only CSI-RS based L3 measurement is configured on SCC.
Note 4: Y is the number of configured inter-frequency MOs without MG that are being measured outside of MG; otherwise, it is 0.
Note 5: Only two NR FR2 operating bands are included for FR2 inter-band CA.
Note 6: N_{PCC_CSIRS}=1 if PCC is with either both SSB and CSI-RS based L3 configured or only CSI-RS based L3 measurement configured; otherwise, N_{PCC_CSIRS} =0.
Note 7: N_{SCC_CSIRS}=Number of configured SCell(s) with either both SSB and CSI-RS based L3 measurement configured or only CSI-RS based L3 measurement configured
Note 8: $N_{SCC_CSIRS_FR2_NCM}$=1 if FR2 SCC, where neighbour cell measurement is required, is with either both SSB and CSI-RS configured or only CSI-RS measurement configured; otherwise, $N_{SCC_CSIRS_FR2_NCM}$=0.
Note 9: N_{SCC_SSB}=Number of configured SCell(s) with only SSB based L3 measurement configured, which is measured without MG.
Note 10: $N_{PCC_CCA_RSSI/CO}$= 1 if PSCC is configured with RSSI/CO measurements without MG when RMTC and SMTC are overlapping; $N_{SCC_CCA_RSSI/CO}$ = Number of MOs for SCell(s) configured with RSSI/CO measurements without MG when RMTC and SMTC are overlapping.

9.1.5.1.3 NR-DC mode: carrier-specific scaling factor for SSB-based and CSI-RS based L3 measurements performed outside gaps

For UE configured with NR-DC operation, the carrier-specific scaling factor $CSSF_{outside_gap,i}$ for intra-frequency SSB-based measurement, inter-frequency SSB-based measurements performed outside measurements gaps and intra-frequency CSI-RS based L3 measurement will be as specified in Table 9.1.5.1.3-1.

Table 9.1.5.1.3-1: $CSSF_{outside_gap,i}$ scaling factor for NR-DC mode

Scenario	$CSSF_{outside_gap,i}$ for FR1 PCC	$CSSF_{outside_gap,i}$ for FR1 SCC	$CSSF_{outside_gap,i}$ for FR2 PSCC	$CSSF_{outside_gap,i}$ for FR2 SCC where neighbour cell measurement is not required	$CSSF_{outside_gap,i}$ for inter-frequency MO with no measurement gap
FR1 + FR2 NR-DC (FR1 PCell and FR2 PScell) Note 1	$1+N_{PCC_CSIRS}$	$2\times(N_{SCC_SSB} +Y+2xN_{SCC_CSIRS})$	$2x(1+ N_{PSCC_CSIRS})$ Note 2	$2x(N_{SCC_SSB} +Y+2x N_{SCC_CSIRS})$	$2x(N_{SCC_SSB} +Y+2x N_{SCC_CSIRS})$

Note 1: NR-DC in Rel-15 only includes the scenarios where all serving cells in MCG in FR1 and all serving cells in SCG in FR2.
Note 2: $CSSF_{outside_gap,i}$ =1 if no SCell is configured and no inter-frequency MO without gap and only SSB based L3 measurement is configured on PSCC; $CSSF_{outside_gap,i}$ =2 if no SCell is configured and no inter-frequency MO without gap and either both SSB and CSI-RS based L3 configured or only CSI-RS based L3 measurement is configured on PSCC.
Note 3: Y is the number of configured inter-frequency SSB based frequency layers without MG that are being measured outside of MG; otherwise, it is 0.
Note 4: N_{PCC_CSIRS}=1 if PCC is with either both SSB and CSI-RS based L3 configured or only CSI-RS based L3 measurement configured; otherwise, N_{PCC_CSIRS} =0.
Note 5: N_{PSCC_CSIRS}=1 if PSCC is with either both SSB and CSI-RS based L3 configured or only CSI-RS based L3 measurement configured; otherwise, N_{PSCC_CSIRS} =0.
Note 6: N_{SCC_CSIRS}=Number of configured SCell(s) with either both SSB and CSI-RS based L3 measurement configured or only CSI-RS based L3 measurement configured
Note 8: N_{SCC_SSB}=Number of configured SCell(s) with only SSB based L3 measurement configured, which is measured without MG.

9.1.5.1.4 NE-DC mode: carrier-specific scaling factor for SSB-based and CSI-RS based measurements performed outside gaps

For UE configured with NE-DC operation, the carrier-specific scaling factor $CSSF_{outside_gap,i}$ for intra-frequency SSB-based measurement and inter-frequency SSB-based measurements performed outside measurements gaps and intra-frequency CSI-RS based L3 measurement will be as specified in Table 9.1.5.1.4-1.

Table 9.1.5.1.4-1: $CSSF_{outside_gap,i}$ scaling factor for NE-DC mode

Scenario	$CSSF_{outside_gap,i}$ for FR1 PCC	$CSSF_{outside_gap,i}$ for FR1 SCC	$CSSF_{outside_gap,i}$ for FR2 PCC	$CSSF_{outside_gap,i}$ for FR2 SCC where neighbour cell measurement is required	$CSSF_{outside_gap,i}$ for FR2 SCC where neighbour cell measurement is not required	$CSSF_{outside_gap,i}$ for inter-frequency MO with no measurement gap
NE-DC with FR1 only CA	$1+N_{PCC_CSIRS}$	$N_{SCC_SSB} +Y+2x N_{SCC_CSIRS}$	N/A	N/A	N/A	$N_{SCC_SSB} +Y+2x N_{SCC_CSIRS}$
NE-DC with FR2 only intra band CA	N/A	N/A	$1+N_{PCC_CSIRS}$	N/A	$N_{SCC_SSB} +Y+2x N_{SCC_CSIRS}$	$N_{SCC_SSB} +Y+2x N_{SCC_CSIRS}$
NE-DC with FR2 only inter band CA	N/A	N/A	$1+N_{PCC_CSIRS}$	$2*(1+ N_{SCC_CSIRS_FR2_NCM})$ Note 3,5	$2\times(N_{SCC_SSB} +Y+2x N_{SCC_CSIRS} -1- N_{SCC_CSIRS_FR2_NCM})$	$2\times(N_{SCC_SSB} +Y+2x N_{SCC_CSIRS} -1- N_{SCC_CSIRS_FR2_NCM})$

NE-DC with FR1 +FR2 CA (FR1 PCell) Note 1	$1+N_{PCC_CSIRS}$	$2\times(N_{SCC_SSB} +Y+2* N_{SCC_CSIRS} - 1-N_{SCC_CSIRS_FR2_NCM})$	N/A	$2x(1+ N_{SCC_CSIRS_FR2_NCM})$ Note 3,5	$2\times(N_{SCC_SSB} +Y+2x N_{SCC_CSIRS} -1- N_{SCC_CSIRS_FR2_NCM})$	$2\times(N_{SCC_SSB} +Y+2x N_{SCC_CSIRS} -1- N_{SCC_CSIRS_FR2_NCM})$

Note 1: Only one FR1 operating band and one FR2 operating band are included for FR1+FR2 inter-band CA.
Note 2: Selection of FR2 SCC where neighbour cell measurement is required follows clause 9.2.3.2.
Note 3: $CSSF_{outside_gap,i}$ =1 if only one SCell is configured and no inter-frequency MO without gap and only SSB based L3 measurement is configured on SCC; $CSSF_{outside_gap,i}$ =2 if only one SCell is configured and no inter-frequency MO without gap and either both SSB and CSI-RS based L3 configured or only CSI-RS based L3 measurement is configured on SCC.
Note 4: Y is the number of configured inter-frequency MOs without MG that are being measured outside of MG; otherwise, it is 0.
Note 5: Only two NR FR2 operating band are included for NE-DC with FR2 only inter-band CA.
Note 6: N_{PCC_CSIRS}=1 if PCC is with either both SSB and CSI-RS based L3 configured or only CSI-RS based L3 measurement configured; otherwise, N_{PCC_CSIRS} =0.
Note 7: N_{SCC_CSIRS}=Number of configured SCell(s) with either both SSB and CSI-RS based L3 measurement configured or only CSI-RS based L3 measurement configured
Note 8: $N_{SCC_CSIRS_FR2_NCM}$=1 if FR2 SCC, where neighbour cell measurement is required, is with either both SSB and CSI-RS configured or only CSI-RS measurement configured; otherwise, $N_{SCC_CSIRS_FR2_NCM}$=0.
Note 9: N_{SCC_SSB}=Number of configured SCell(s) with only SSB based L3 measurement configured, which is measured without MG.

9.1.5.2 Monitoring of multiple layers within gaps

For a UE supporting concurrent gaps and when concurrent gaps are configured the carrier-specific scaling factor $CSSF_{within_gap,i}$ for a measurement object *i* derived in this chapter is applied to following measurement types for each measurement gap:

- SSB-based intra-frequency measurement object with no measurement gap in clause 9.2.5 and 9.2A.5, when all of the SMTC occasions of this intra-frequency measurement object are overlapped by the measurement gap or concurrent measurement gaps.
- SSB-based intra-frequency measurement object with measurement gap in clause 9.2.6 and 9.2A.6.
- CSI-RS based inter-frequency measurement in clause 9.10.3, when CSI-RS resources for L3 measurement of this inter-frequency measurement object are overlapped by the measurement gap or concurrent measurement gaps.
- CSI-RS based inter-frequency measurement in clause 9.10.3, when CSI-RS resources for L3 measurement of this inter-frequency measurement object are partially overlapped by the measurement gap or concurrent measurement gaps.
- SSB-based inter-frequency measurement object with measurement gap in clause 9.3.4.
- SSB-based inter-frequency measurement object without measurement gap for UE capable of *interFrequencyMeas-NoGap* in clause 9.3.9, when
  - all of the SMTC occasions of this inter-frequency measurement object are overlapped by the measurement gap or concurrent measurement gaps, or
  - part of the SMTC occasions of this inter-frequency measurement object are overlapped by the measurement gap or concurrent measurement gaps, but the flag *interFrequencyConfig-NoGap-r16* is not configured by the Network.
- NR PRS-based measurements for positioning in clause 9.9.
- E-UTRA Inter-RAT measurement object in clauses 9.4.2 and 9.4.3.

Otherwise, the carrier-specific scaling factor $CSSF_{within_gap,i}$ for a measurement object *i* derived in this chapter is applied to following measurement types:

- SSB-based intra-frequency measurement object with no measurement gap in clause 9.2.5 and 9.2A.5, when all of the SMTC occasions of this intra-frequency measurement object are overlapped by the measurement gap or concurrent measurement gaps.

- SSB-based intra-frequency measurement object with measurement gap in clause 9.2.6 and 9.2A.6.
- CSI-RS based inter-frequency measurement in clause 9.10.3, when CSI-RS resources for L3 measurement of this inter-frequency measurement object are overlapped by the measurement gap or concurrent measurement gaps.
- CSI-RS based inter-frequency measurement in clause 9.10.3, when CSI-RS resources for L3 measurement of this inter-frequency measurement object are partially overlapped by the measurement gap or concurrent measurement gaps.
- SSB-based inter-frequency measurement object with measurement gap in clause 9.3.4.
- SSB-based inter-frequency measurement object without measurement gap for UE capable of *interFrequencyMeas-NoGap* in clause 9.3.9, when
  - all of the SMTC occasions of this inter-frequency measurement object are overlapped by the measurement gap or concurrent measurement gaps, or
  - part of the SMTC occasions of this inter-frequency measurement object are overlapped by the measurement gap or concurrent measurement gaps, but the flag *interFrequencyConfig-NoGap-r16* is not configured by the Network.
- Intra-frequency RSSI/CO measurement with measurement gap in clause 9.2A.7.
- Intra-frequency RSSI/CO measurement with no measurement gap in clause 9.2A.7 when all of the RMTC occasions of this intra-frequency RSSI/CO measurement are overlapped by the measurement gap(s).
- Inter-frequency RSSI/CO measurement in clause 9.3A.8 and 9.3A.9.
- E-UTRA Inter-RAT measurement object in clauses 9.4.2 and 9.4.3.
- NR PRS-based measurements for positioning in clause 9.9.
- E-UTRA Inter-RAT RSTD and E-CID measurements in clauses 9.4.4 and 9.4.5.
- For a UE in E-UTRA-NR dual connectivity operation, NR SSB-based Inter-RAT measurement object configured by the E-UTRAN PCell (TS 36.133 [15] clause 8.17.4) on an NR serving carrier
  - the SSB is not completely contained in the active BWP of the UE, or
  - all of the SMTC occasions of this inter-RAT measurement object are overlapped by the measurement gap;
- NR SSB-based Inter-RAT measurement object configured by the E-UTRAN PCell (TS 36.133 [15] clause 8.17.4) on an NR non-serving carrier.
- E-UTRAN Inter-frequency measurement object configured by the E-UTRAN PCell (TS 36.133 [15] clause 8.17.3) and by the E-UTRAN PSCell (TS 36.133 [15] clause 8.19.3).
- E-UTRAN Inter-frequency RSTD measurement configured by the E-UTRAN PCell (TS 36.133 [15] clause 8.17.15).
- UTRA Inter-RAT measurement object configured by the E-UTRAN PCell (TS 36.133 [15] clauses 8.17.5 to 8.17.12).
- GSM Inter-RAT measurements configured by the E-UTRAN PCell (TS 36.133 [15] clauses 8.17.13 and 8.17.14).

The UE is expected to conduct the measurement of this measurement object *i* only within the measurement gaps. If UE is configured with concurrent measurement gaps and an association between measurement object i and certain measurement gaps is provided, the requirements are defined assuming the UE shall conduct the measurement of this measurement object *i* at least within the associated measurement gaps.

If the higher layer signaling in TS 38.331 [2] of *smtc2* is present and *smtc1* is fully overlapping with measurement gaps and *smtc2* is partially overlapping with measurement gaps, $CSSF_{within_gap,i}$ and requirements derived from $CSSF_{outside_gap,i}$ are not specified.

Number of SSB layers should include SSB for mobility and that as associated SSB for CSI-RS mobility. the ssbfrequency is counted only once if the ssbfrequency for mobility and associated SSB are the same, or ssbfrequency and smtc in multiple MOs are the same.

Editor's note: FFS how to add the layer corresponding to the associated SSB for a MO with only CSI-RS measurement configured

9.1.5.2.1 EN-DC mode: carrier-specific scaling factor for SSB, CSI-RS-based L3 measurements and RSSI and channel occupancy measurements performed within gaps

The scaling value $CSSF_{within_gap,i}$ below has been derived without considering GSM inter-RAT carriers.

When one or more measurement objects are monitored within measurement gaps, the carrier specific scaling factor for a target measurement object with index *i* is designated as $CSSF_{within_gap,i}$ and is derived as described in this clause.

For UE supporting per-FR gap, for each measurement object *i* that are measured based on effective MGRP as defined in clause 9.1.2, $CSSF_{within_gap,i}$ used for derving the measurement requirements is defined as $2*N_{with_CSI\text{-}RS} + N_{SSB_only}$, where

- $N_{with_CSI\text{-}RS}$ is the number of measurement objects with either both SSB and CSI-RS based L3 configured or only CSI-RS based L3 measurement configured in the same FR as measurement object *i*, and

- N_{SSB_only} is the number of measurement objects with only SSB based L3 measurement configured in the same FR as measurement object *i*.

For a UE in E-UTRA-NR dual connectivity operation, if a SSB-based measurement object configured by PSCell and an NR SSB-based inter-RAT measurement object configured by E-UTRAN PCell are on the same carrier, they shall be counted as one measurement object in $M_{tot,i,j}$, provided that they meet the measurement object merging conditions [in clause 9.1.3.2].

If measurement object *i* refers to an RSTD measurement with periodicity Tprs>160ms or with periodicity Tprs=160ms but *prs-MutingInfo-r9* is configured, $CSSF_{within_gap,i}$=1. Otherwise, the $CSSF_{within_gap,i}$ for other measurement objects (including RSTD measurement with periodicity Tprs=160ms) participate in the gap competition are derived as below.

For each measurement gap *j* not used for an RSTD measurement with periodicity Tprs>160ms or with periodicity Tprs=160ms but *prs-MutingInfo-r9* is configured within an arbitrary 160ms period, count the total number of intra-frequency measurement objects and inter-frequency/inter-RAT measurement objects which are candidates to be measured within the gap *j*.

- An NR measurement object with SSB measurement configured is a candidate to be measured in a gap if its SMTC duration is fully covered by the MGL excluding RF switching time. For intra-frequency NR carriers, if the higher layer in TS 38.331 [2] signaling of *smtc2* is configured, the assumed periodicity of SMTC occasions corresponds to the value of higher layer parameter *smtc2*; otherwise the assumed periodicity of SMTC occasions corresponds to the value of higher layer parameter *smtc1*.

- An NR measurement object with CSI-RS measurement configured is a candidate to be measured in a gap if the window confining all CSI-RS resources are fully covered by the MGL excluding RF switching time. -

- An NR measurement object with RSSI and channel occupancy measurement is a candidate to be measurement in a gap if the RMTC duration is fully covered by MGL excluding RF switching time

- An inter-RAT UTRA measurement object configured by E-UTRA PCell [15] is a candidate to be measured in all measurement gaps.

- An inter-frequency E-UTRA measurement object configured by E-UTRA PCell [15] is a candidate to be measured in all measurement gaps.

- For UEs which support and are configured with per FR gaps, the counting is done on a per FR basis, and for UEs which are configured with per UE gaps the counting is done on a per UE basis.

- $M_{intra,i,j}$: Number of intra-frequency measurement objects, including both SSB, CSI-RS based and RSSI/CO measurement, which are candidates to be measured in gap *j* where the measurement object *i* is also a candidate. Otherwise $M_{intra,i,j}$ equals 0.

- $M_{inter,i,j}$: Number of NR inter-frequency layers including both SSB and CSI-RS based NR inter-RAT frequency layer and RSSI/CO measurement, configured by E-UTRA PCell, EUTRA inter-frequency measurement objects configured by E-UTRA PCell, or UTRA inter-RAT measurement objects configured by E-UTRA PCell which are candidates to be measured in gap *j* where the measurement object *i* is also a candidate. Otherwise $M_{inter,i,j}$ equals 0.

- A measurement object *i* in $M_{intra,i,j}$ and in $M_{inter,i,j}$ is counted twice if the measurement object is configured with both RMTC and SMTC which are candidates to be measured in gap *j* where the measurement object *i* is also a candidate

- $M_{tot,i,j} = M_{intra,i,j} + M_{inter,i,j}$: Total number of intra-frequency, inter-frequency and inter-RAT frequency layers which are candidates to be measured in gap *j* where the measurement object *i* is also a candidate. Otherwise $M_{tot,i,j}$ equals 0.

For each measurement gap *j* used for an RSTD measurement with periodicity Tprs>160ms or with periodicity Tprs=160ms but *prs-MutingInfo-r9* is configured within an arbitrary 160ms period, $M_{intra,i,j} = M_{inter,i,j} = M_{tot,i,j} = 0$.

The carrier specific scaling factor $CSSF_{within_gap,i}$ is given by:

If *measGapSharingScheme* is equal sharing, $CSSF_{within_gap,i} = \max(\text{ceil}(R_i \times M_{tot,i,j}))$, where $j=0\ldots(160/MGRP)-1$

If *measGapSharingScheme* is not equal sharing and

- measurement object *i* is an intra-frequency measurement object, $CSSF_{within_gap,i}$ is the maximum among
  - $\text{ceil}(R_i \times K_{intra} \times M_{intra,i,j})$ in gaps where $M_{inter,i,j} \neq 0$, where $j=0\ldots(160/MGRP)-1$
  - $\text{ceil}(R_i \times M_{intra,i,j})$ in gaps where $M_{inter,i,j}=0$, where $j=0\ldots(160/MGRP)-1$
- measurement object *i* is an inter-frequency or inter-RAT measurement object, $CSSF_{within_gap,i}$ is the maximum among
  - $\text{ceil}(R_i \times K_{inter} \times M_{inter,i,j})$ in gaps where $M_{intra,i,j} \neq 0$, where $j=0\ldots(160/MGRP)-1$
  - $\text{ceil}(R_i \times M_{inter,i,j})$ in gaps where $M_{intra,i,j}=0$, where $j=0\ldots(160/MGRP)-1$

Where R_i is the maximal ratio of the number of measurement gap where measurement object *i* is a candidate to be measured over the number of measurement gap where measurement object *i* is a candidate and not used for RSTD measurement with periodicity Tprs>160ms or with periodicity Tprs=160ms but *prs-MutingInfo-r9* is configured within an arbitrary 1280ms period.

9.1.5.2.2 SA mode: carrier-specific scaling factor for SSB, CSI-RS-based L3 measurements and RSSI and channel occupancy measurements performed within gaps

When one or more measurement objects are monitored within measurement gaps, the carrier specific scaling factor for a target measurement object with index *i* is designated as $CSSF_{within_gap,i}$ and is derived as described in this clause.

For UE supporting per-FR gap, for each measurement object *i* that are measured based on effective MGRP as defined in clause 9.1.2, $CSSF_{within_gap,i}$ used for derving the measurement requirements is defined as $2*N_{with_CSI\text{-}RS} + N_{SSB_only}$, where

- $N_{with_CSI\text{-}RS}$ is the number of measurement objects with either both SSB and CSI-RS based L3 configured or only CSI-RS based L3 measurement configured in the same FR as measurement object *i*, and

- N_{SSB_only} is the number of measurement objects with only SSB based L3 measurement configured in the same FR as measurement object *i*.

If a UE capable of concurrent gaps is configured with concurrent gaps, the carrier specific scaling factor is calculated separately for each gap pattern, [provided that the association between measurement objects and gap pattern is configured by network. Only the measurement objects associated to the same measurement gap pattern are counted when deriving $CSSF_{within_gap,I}$ for a target measurement object with index *i*.]. In case of collision between concurrent measurement gaps, some measurement gap occasions may be dropped according to clause [9.1.X2.x]. The dropped gap occasions will not be used in deriving $CSSF_{within_gap,i}$.

Editor's note: FFS whether to remove [ ] or revise the sentence in [ ] after RAN2 concludes the implementation on RRC association.

If measurement object *i* refers to a long-periodicity measurement which is any of:

- an E-UTRA RSTD measurement with periodicity Tprs>160ms or with periodicity Tprs=160ms but *prs-MutingInfo-r9* is configured, or

- an NR measurement for positioning frequency layer i with $T_{available_PRS,i}$ >160ms, where $T_{available_PRS,i}$ is defined in clauses 9.9.2.5, 9.9.3.5 and 9.9.4.5 for RSTD, PRS-RSRP and UE Rx-Tx time difference measurements, respectively.

then $CSSF_{within_gap,i}$=1. Otherwise, the $CSSF_{within_gap,i}$ for other measurement objects (including E-UTRA RSTD measurement with periodicity Tprs=160ms) participate in the gap competition and the $CSSF_{within_gap,i}$ are derived as below.

Table 9.1.5.2.2-1: void

When multiple positioning frequency layers are configured,

- for each positioning frequency layer i, CSSFwithin_gap,i is derived with the following steps assuming no other positioning frequency layer is configured.

- for each RRM frequency layer i, CSSFwithin_gap,i is derived as follows:

  - an intermediate $CSSF_{within_gap,i,k}$ is derived with the following steps assuming only positioning frequency layer *k* is configured, and

- $CSSF_{within_gap,i}$= max($CSSF_{within_gap,i,k}$), where *k*=0…K-1, and K is the number of configured positioning frequency layers.For each measurement gap *j* not used for a long-periodicity measurement defined above, count the total number of intra-frequency measurement objects and inter-frequency/inter-RAT measurement objects and NR PRS measurements on all positioning frequency layers which are candidates to be measured within the gap *j*.

- An NR measurement object with SSB measurement configured is a candidate to be measured in a gap if its SMTC duration is fully covered by the MGL excluding RF switching time. For intra-frequency NR measurement objects, if the higher layer in TS 38.331 [2] signaling of *smtc2* is configured, the assumed periodicity of SMTC occasions corresponds to the value of higher layer parameter *smtc2*; otherwise the assumed periodicity of SMTC occasions corresponds to the value of higher layer parameter *smtc1*.

- An NR measurement object with CSI-RS measurement configured is a candidate to be measured in a gap if the window confining all CSI-RS resources are fully covered by the MGL excluding RF switching time.

- An NR measurement object with RSSI and channel occupancy measurement is a candidate to be measurement in a gap if the RMTC duration is fully covered by MGL excluding RF switching time

- An inter-frequency SFTD measurement object, if to be measured with measurement gaps, is a candidate to be measured in all measurement gaps.

- An NR PRS-based measurement is a candidate to be measured in a gap is TBD.

- A positioning frequency layer is counted as candidate for a MG occasion if at least one PRS resource on that positioning frequency layer is fully covered by the MGL excluding RF switching time.

- For UEs which support and are configured with per FR gaps, the counting is done on a per FR basis, and for UEs which are configured with per UE gaps the counting is done on a per UE basis. For UEs which support and are configured with per FR gaps, the CSSF requirements do not apply when NR PRS measurement in one FR gap collides with SSB/CSI-RS/PRS measurements in the other FR gap in time domain.

- $M_{intra,i,j}$: Number of intra-frequency measurement objects, including both SSB, CSI-RS based and RSSI/CO measurements, which are candidates to be measured in gap *j* where the measurement object *i* is also a candidate. Otherwise $M_{intra,i,j}$ equals 0.

- $M_{inter,i,j}$: Number of NR inter-frequency layers including both SSB and CSI-RS based, EUTRA inter-RAT and UTRA inter-RAT frequency layers, up to one positioning frequency layer, RSSI/CO measurements, which are

candidates to be measured in gap *j* where the measurement object *i* is also a candidate. Otherwise $M_{inter,i,j}$ equals 0.

- A measurement object *i* in $M_{intra,i,j}$ and in $M_{inter,i,j}$ is counted twice if the measurement object is configured with both RMTC and SMTC which are candidates to be measured in gap *j* where the measurement object *i* is also a candidate

- $M_{tot,i,j} = M_{intra,i,j} + M_{inter,i,j}$: Total number of intra-frequency, inter-frequency and inter-RAT frequncy layers and up to one NR PRS measurement on any one positioning frequency layer, which are candidates to be measured in gap *j* where the measurement object *i* is also a candidate. Otherwise $M_{tot,i,j}$ equals 0.

For each measurement gap *j* used for a long-periodicity measurement defined above, $M_{intra,i,j} = M_{inter,i,j} = M_{tot,i,j} = 0$. The carrier specific scaling factor $CSSF_{within_gap,i}$ is given by:

If *measGapSharingScheme* is equal sharing, $CSSF_{within_gap,i} = \max(\text{ceil}(R_i \times M_{tot,i,j}))$, where $j=0\ldots(160/MGRP)-1$

If *measGapSharingScheme* is not equal sharing and

- measurement object *i* is an intra-frequency measurement object, $CSSF_{within_gap,i}$ is the maximum among
  - $\text{ceil}(R_i \times K_{intra} \times M_{intra,i,j})$ in gaps where $M_{inter,i,j} \neq 0$, where $j=0\ldots(160/MGRP)-1$
  - $\text{ceil}(R_i \times M_{intra,i,j})$ in gaps where $M_{inter,i,j}=0$, where $j=0\ldots(160/MGRP)-1$
- measurement object *i* is an inter-frequency or inter-RAT measurement object or NR PRS measurement on any one positioning frequency layer, $CSSF_{within_gap,i}$ is the maximum among
  - $\text{ceil}(R_i \times K_{inter} \times M_{inter,i,j})$ in gaps where $M_{intra,i,j} \neq 0$, where $j=0\ldots(160/MGRP)-1$
  - $\text{ceil}(R_i \times M_{inter,i,j})$ in gaps where $M_{intra,i,j}=0$, where $j=0\ldots(160/MGRP)-1$

Where R_i is the maximal ratio of the number of measurement gap where measurement object *i* is a candidate to be measured over the number of measurement gap where measurement object *i* is a candidate and not used for a long-periodicity measurement defined above.

$CSSF_{within_gap,k}=1$ during $T_{Detect,\ E\text{-}UTRAN\ FDD}$ specified in clause 9.4.4.1.2.2 and $T_{Detect,\ E\text{-}UTRAN\ TDD}$ specified in clause 9.4.4.2.2.2, where k is the carrier frequency where the UE is performing cell detection of the inter-RAT E-UTRA OTDOA assistance data reference cell when acquiring the subframe and slot timing of the cell according to clause 9.4.4. In this case, the UE cell identification and measurement periods derived based on $CSSF_{within_gap,i}$ in clauses 9.2.5.1, 9.2.5.2, 9.2.6.2, 9.2.6.3, 9.3.4, 9.3.5, 9.4.2.2, 9.4.2.3 and 9.10.2 may be extended for measurement objects of which the cell identification and measurement periods are overlapped with $T_{Detect,\ E\text{-}UTRAN\ FDD}$ and $T_{Detect,\ E\text{-}UTRAN\ TDD}$.

9.1.5.2.3 NE-DC: carrier-specific scaling factor for SSB-based and CSI-RS based L3 measurements performed within gaps

When one or more measurement objects are monitored within measurement gaps, the carrier specific scaling factor for a target measurement object with index *i* is designated as $CSSF_{within_gap,i}$ and is derived as described in this clause.

For UE supporting per-FR gap, for each measurement object *i* that are measured based on effective MGRP as defined in clause 9.1.2, $CSSF_{within_gap,i}$ used for derving the measurement requirements is defined as $2*N_{with_CSI\text{-}RS} + N_{SSB_only}$, where

- $N_{with_CSI\text{-}RS}$ is the number of measurement objects with either both SSB and CSI-RS based L3 configured or only CSI-RS based L3 measurement configured in the same FR as measurement object *i*, and

- N_{SSB_only} is the number of measurement objects with only SSB based L3 measurement configured in the same FR as measurement object *i*.

If measurement object *i* refers to a long-periodicty measurement which is any of:

- an E-UTRA RSTD measurement with periodicity Tprs>160ms or with periodicity Tprs=160ms but *prs-MutingInfo-r9* is configured, or

- an NR measurement for positioning frequency layer i with $T_{available_PRS,i}$ >160ms, where $T_{available_PRS,i}$ is defined in clauses 9.9.2.5, 9.9.3.5 and 9.9.4.5 for RSTD, PRS-RSRP and UE Rx-Tx time difference measurements, respectively.

then $CSSF_{within_gap,i}$=1. Otherwise, the $CSSF_{within_gap,i}$ for other measurement objects (including E-UTRA RSTD measurement with periodicity Tprs=160ms) participate in the gap competition are derived as below.

When multiple positioning frequency layers are configured,

- for each positioning frequency layer *i*, $CSSF_{within_gap,i}$ is derived with the following steps assuming no other positioning frequency layer is configured.

- for each RRM frequency layer *i*, $CSSF_{within_gap,i}$ is derived as follows:

  - an intermediate $CSSF_{within_gap,i,k}$ is derived with the following steps assuming only positioning frequency layer *k* is configured, and

  - $CSSF_{within_gap,i}$= max($CSSF_{within_gap,i,k}$), where *k*=0…K-1, and K is the number of configured positioning frequency layers.

For each measurement gap *j* not used for a long-periodicity measurement defined above, count the total number of intra-frequency measurement objects and inter-frequency/inter-RAT measurement objects and NR PRS measurements on all positioning frequency layers which are candidates to be measured within the gap *j*.

- An NR measurement object with SSB measurement configured is a candidate to be measured in a gap if its SMTC duration is fully covered by the MGL excluding RF switching time. For intra-frequency NR measurement objects, if the higher layer in TS 38.331 [2] signaling of *smtc2* is configured, the assumed periodicity of SMTC occasions corresponds to the value of higher layer parameter *smtc2*; otherwise the assumed periodicity of SMTC occasions corresponds to the value of higher layer parameter *smtc1*.

- An NR measurement object with CSI-RS measurement configured is a candidate to be measured in a gap if the window confining all CSI-RS resources are fully covered by the MGL excluding RF switching time.

- An inter-RAT measurement object is a candidate to be measured in all measurement gaps.

- An inter-frequency E-UTRA measurement object is a candidate to be measured in all measurement gaps.

- A positioning frequency layer is counted as candidate for a MG occasion if at least one PRS resource on that positioning frequency layer is fully covered by the MGL excluding RF switching time.

  For UEs which support and are configured with per FR gaps, the counting is done on a per FR basis, and for UEs which are configured with per UE gaps the counting is done on a per UE basis. For UEs which support and are configured with per FR gaps, the CSSF requirements do not apply when NR PRS measurement in one FR gap collides with SSB/CSI-RS/PRS measurements in the other FR gap in time domain.

  If the number of configured interfrequency and interRAT measuerement objects and NR PRS measurements on all positioning frequency layers is non-zero and the UE is configured with per UE gaps, or if the UE is configured with per FR gaps:

  FR1 and FR2 intrafrequency measurement objects belong to group A

  Interfrequency and interRAT measurement objects belong to group B

  $M_{groupA,i,j}$: Sum of the number of FR1 intra-frequency measurement objects $M_{intra\text{-}FR1,i,j}$ and the number of FR2 intra-frequency measurement objects $M_{intra\text{-}FR2,i,j}$, including both SSB and CSI-RS based, which are candidates to be measured in gap *j* where the measurement object *i* is also a candidate. Otherwise $M_{groupA,i,j}$ equals 0.

  $M_{groupBi,j}$: Number of NR inter-frequency layers including both SSB and CSI-RS based, EUTRA inter-RAT and UTRA inter-RAT measurement objects, up to one positioning frequency layer, which are candidates to be measured in gap *j* where the measurement object *i* is also a candidate. Otherwise $M_{groupB,i,j}$ equals 0.

  If the number of configured inter-frequency and inter-RAT measuerement objects and NR PRS measurements on all positioning frequency layers is zero and the UE is configured with per UE gaps:

FR1 intrafrequency measurement objects belong to group A

FR2 intrafrequency measurement objects belong to group B

$M_{groupA,i,j}$: The number of FR1 intrafrequency measurement objects $M_{intra\text{-}FR1,i,j}$, including both SSB and CSI-RS based, which are candidates to be measured in gap *j* where the measurement object *i* is also a candidate. Otherwise $M_{groupA,i,j}$ equals 0.

$M_{groupBi,j}$: The number of FR2 intrafrequency measurement objects $M_{intra\text{-}FR2,i,j}$, including both SSB and CSI-RS based, which are candidates to be measured in gap *j* where the measurement object *i* is also a candidate. Otherwise $M_{groupB,i,j}$ equals 0.

$M_{tot,i,j} = M_{groupA,i,j} + M_{groupB,i,j}$: Total number of group A and group B measurement objects which are candidates to be measured in gap *j* where the measurement object *i* is also a candidate. Otherwise $M_{tot,i,j}$ equals 0.

For each measurement gap *j* used for a long-periodicity measurement defined above, $M_{intra,i,j} = M_{inter,i,j} = M_{tot,i,j} = 0$. The carrier specific scaling factor $CSSF_{within_gap,i}$ is given by:

If *measGapSharingScheme* is equal sharing, $CSSF_{within_gap,i} = \max(\text{ceil}(R_i \times M_{tot,i,j}))$, where $j = 0 \ldots (160/MGRP)-1$

If *measGapSharingScheme* is not equal sharing and

- measurement object *i* is a group A measurement object, $CSSF_{within_gap,i}$ is the maximum among
  - $\text{ceil}(R_i \times K_{intra} \times M_{groupA,i,j})$ in gaps where $M_{groupB,i,j} \neq 0$, where $j = 0 \ldots (160/MGRP)-1$
  - $\text{ceil}(R_i \times M_{groupA,i,j})$ in gaps where $M_{groupB,i,j} = 0$, where $j = 0 \ldots (160/MGRP)-1$
- measurement object *i* is an group B measurement object, $CSSF_{within_gap,i}$ is the maximum among
  - $\text{ceil}(R_i \times K_{inter} \times M_{groupBi,j})$ in gaps where $M_{groupA,i,j} \neq 0$, where $j = 0 \ldots (160/MGRP)-1$
  - $\text{ceil}(R_i \times M_{groupB,i,j})$ in gaps where $M_{groupA,i,j} = 0$, where $j = 0 \ldots (160/MGRP)-1$

Where R_i is the maximal ratio of the number of measurement gap where measurement object *i* is a candidate to be measured over the number of measurement gap where measurement object *i* is a candidate and not used for a long-periodicity measurement defined above.

9.1.5.2.4 NR-DC: carrier-specific scaling factor for SSB-based and CSI-RS-based L3 measurements performed within gaps

When one or more measurement objects are monitored within measurement gaps, the carrier specific scaling factor for a target measurement object with index *i* is designated as $CSSF_{within_gap,i}$ and is derived as described in this clause.

For UE supporting per-FR gap, for each measurement object *i* that are measured based on effective MGRP as defined in clause 9.1.2, $CSSF_{within_gap,i}$ used for derving the measurement requirements is defined as $2*N_{with_CSI\text{-}RS} + N_{SSB_only}$, where

- $N_{with_CSI\text{-}RS}$ is the number of measurement objects with either both SSB and CSI-RS based L3 configured or only CSI-RS based L3 measurement configured in the same FR as measurement object *i*, and
- N_{SSB_only} is the number of measurement objects with only SSB based L3 measurement configured in the same FR as measurement object *i*.

If measurement object *i* refers to a long-periodicity measurement which is any of:

- an E-UTRA RSTD measurement with periodicity Tprs>160ms or with periodicity Tprs=160ms but *prs-MutingInfo-r9* is configured, or
- an NR measurement for positioning frequency layer i with $T_{available_PRS,i}$ >160ms, where $T_{available_PRS,i}$ is defined in clauses 9.9.2.5, 9.9.3.5 and 9.9.4.5 for RSTD, PRS-RSRP and UE Rx-Tx time difference measurements, respectively.

then $CSSF_{within_gap,i}=1$. Otherwise, the $CSSF_{within_gap,i}$ for other measurement objects (including E-UTRA RSTD measurement with periodicity Tprs=160ms) participate in the gap competition and the $CSSF_{within_gap,i}$ are derived as below.

When multiple positioning frequency layers are configured,

- for each positioning frequency layer *i*, $CSSF_{within_gap,i}$ is derived with the following steps assuming no other positioning frequency layer is configured.
- for each RRM frequency layer *i*, $CSSF_{within_gap,i}$ is derived as follows:
  - an intermediate $CSSF_{within_gap,i,k}$ is derived with the following steps assuming only positioning frequency layer *k* is configured, and
  - $CSSF_{within_gap,i}$= max($CSSF_{within_gap,i,k}$), where *k*=0…K-1, and K is the number of configured positioning frequency layers.

For each measurement gap *j* not used for an RSTD measurement with periodicity Tprs>160ms or with periodicity Tprs=160ms but *prs-MutingInfo-r9* is configured within an arbitrary 160ms period, count the total number of intra-frequency measurement objects and inter-frequency/inter-RAT measurement objects and NR PRS measurements on all positioning frequency layers which are candidates to be measured within the gap *j*.

- An NR measurement object with SSB measurement configured is a candidate to be measured in a gap if its SMTC duration is fully covered by the MGL excluding RF switching time. For intra-frequency NR measurement objects, if the higher layer in TS 38.331 [2] signaling of *smtc2* is configured, the assumed periodicity of SMTC occasions corresponds to the value of higher layer parameter *smtc2*; otherwise the assumed periodicity of SMTC occasions corresponds to the value of higher layer parameter *smtc1*.
- An NR measurement object with CSI-RS measurement configured is a candidate to be measured in a gap if the window confining all CSI-RS resources are fully covered by the MGL excluding RF switching time.
- A positioning frequency layer is counted as candidate for a MG occasion if at least one PRS resource on that positioning frequency layer is fully covered by the MGL excluding RF switching time.

  For UEs which support and are configured with per FR gaps, the counting is done on a per FR basis, and for UEs which are configured with per UE gaps the counting is done on a per UE basis. For UEs which support and are configured with per FR gaps, the CSSF requirements do not apply when NR PRS measurement in one FR gap collides with SSB/CSI-RS/PRS measurements in the other FR gap in time domain.

  If the number of configured interfrequency and interRAT measuerement objects and NR PRS measurements on all positioning frequency layers is non-zero and the UE is configured with per UE gaps, or if the UE is configured with per FR gaps:

  FR1 and FR2 intrafrequency measurement objects belong to group A

  Interfrequency and interRAT measurement objects and up to one NR PRS measurement on any one positioning frequency layer belong to group B

  $M_{groupA,i,j}$: Sum of the number of FR1 intra-frequency measurement objects $M_{intra\text{-}FR1,i,j}$ and the number of FR2 intra-frequency measurement objects $M_{intra\text{-}FR2,i,j}$, including both SSB and CSI-RS based, which are candidates to be measured in gap *j* where the measurement object *i* is also a candidate. Otherwise $M_{groupA,i,j}$ equals 0.

  $M_{groupBi,j}$: Number of NR inter-frequency layers including both SSB and CSI-RS based, EUTRA inter-RAT and UTRA inter-RAT measurement objects and up to one positioning frequency layer, which are candidates to be measured in gap *j* where the measurement object *i* is also a candidate. Otherwise $M_{groupB,i,j}$ equals 0.

  If the number of configured interfrequency and interRAT measuerement objects and NR PRS measurements on all positioning frequency layers is zero and the UE is configured with per UE gaps:

  FR1 intrafrequency measurement objects belong to group A

  FR2 intrafrequency measurement objects belong to group B

  $M_{groupA,i,j}$: The number of FR1 intrafrequency measurement objects $M_{intra\text{-}FR1,i,j}$, including both SSB and CSI-RS based, which are candidates to be measured in gap *j* where the measurement object *i* is also a candidate. Otherwise $M_{groupA,i,j}$ equals 0.

$M_{groupBi,j}$: The number of FR2 intrafrequency measurement objects $M_{intra\text{-}FR2,i,j}$, including both SSB and CSI-RS based, which are candidates to be measured in gap *j* where the measurement object *i* is also a candidate. Otherwise $M_{groupB,i,j}$ equals 0.

$M_{tot,i,j} = M_{groupA,i,j} + M_{groupB,i,j}$: Total number of group A and group B measurement objects which are candidates to be measured in gap *j* where the measurement object *i* is also a candidate. Otherwise $M_{tot,i,j}$ equals 0.

For each measurement gap *j* used for a long-periodicity measurement defined above, $M_{intra,i,j} = M_{inter,i,j} = M_{tot,i,j} = 0$. The carrier specific scaling factor $CSSF_{within_gap,i}$ is given by:

If *measGapSharingScheme* is equal sharing, $CSSF_{within_gap,i} = \max(\text{ceil}(R_i \times M_{tot,i,j}))$, where $j=0\ldots(160/MGRP)-1$

If *measGapSharingScheme* is not equal sharing and

- measurement object *i* is a group A measurement object, $CSSF_{within_gap,i}$ is the maximum among
  - $\text{ceil}(R_i \times K_{intra} \times M_{groupA,i,j})$ in gaps where $M_{groupB,i,j} \neq 0$, where $j=0\ldots(160/MGRP)-1$
  - $\text{ceil}(R_i \times M_{groupA,i,j})$ in gaps where $M_{groupB,i,j}=0$, where $j=0\ldots(160/MGRP)-1$
- measurement object *i* is an group B measurement object, $CSSF_{within_gap,i}$ is the maximum among
  - $\text{ceil}(R_i \times K_{inter} \times M_{groupBi,j})$ in gaps where $M_{groupA,i,j} \neq 0$, where $j=0\ldots(160/MGRP)-1$
  - $\text{ceil}(R_i \times M_{groupB,i,j})$ in gaps where $M_{groupA,i,j}=0$, where $j=0\ldots(160/MGRP)-1$

R_i is the maximal ratio of the number of measurement gap where measurement object *i* is a candidate to be measured over the number of measurement gap where measurement object *i* is a candidate and not used for a long-periodicity measurement defined above.

9.1.5.2.5 SA mode: carrier-specific scaling factor for PRS-based measurements performed within gaps

The requirements in this clause apply for NR PRS-based measurements for positioning in clause 9.9.

When NR PRS-based measurements for positioning are configured on one or more positioning frequency layers within measurement gaps, the carrier specific scaling factor for a target PRS-based positioning measurement on a positioning frequency layer with index *i* is designated as $CSSF_{within_gap,i}$ and is derived as described in clause 9.1.5.2.2.

NR Positioning measurement requirements for long periodicity measurements apply in case all PRS resources in the PFL are configured with periodicity > 160 ms.

9.1.5.2.6 NE-DC: carrier-specific scaling factor for PRS-based measurements performed within gaps

The requirements in this clause apply for NR PRS-based measurements for positioning in clause 9.9.

When NR PRS-based measurements for positioning are configured on one or more positioning frequency layers within measurement gaps, the carrier specific scaling factor for a target measurement on a positioning frequency layer with index *i* is designated as $CSSF_{within_gap,i}$ and is derived as described in clause 9.1.5.2.3.

NR Positioning measurement requirements for long periodicity measurements apply in case all PRS resources in the PFL are configured with periodicity > 160 ms.

9.1.5.2.7 NR-DC: carrier-specific scaling factor for PRS-based measurements performed within gaps

The requirements in this clause apply for NR PRS-based measurements for positioning in clause 9.9.

When NR PRS-based measurements for positioning are configured on one or more positioning frequency layers within measurement gaps, the carrier specific scaling factor for a target measurement on a positioning frequency layer with index *i* is designated as $CSSF_{within_gap,i}$ and is derived as described in clause 9.1.5.2.4.

NR Positioning measurement requirements for long periodicity measurements apply in case all PRS resources in the PFL are configured with periodicity > 160 ms.

9.1.5.3 Monitoring of multiple layers within NCSG

The measurement requirements derived from $CSSF_{within_ncsg,i}$ defined in this clause are applicable provided that network provides NCSG pattern for measurement.

The carrier-specific scaling factor $CSSF_{within_ncsg,i}$ for a measurement object *i* derived in this clause is applied to following measurement types:

- SSB-based intra-frequency measurement object without measurement gap as defined in clause 9.2.1 corresponding to an activated serving cell, when all of the SMTC occasions of this intra-frequency measurement object are overlapped by the NCSG;
- SSB-based intra-frequency measurement object with NCSG as defined in clause 9.2.1 corresponding to an activated serving cell (in non-dormancy);
- SSB-based intra-frequency measurement object corresponding to a deactivated serving cell or to an activated serving cell in dormancy, when all or part of the SMTC occasions of this intra-frequency measurement object are overlapped by the NCSG;
- SSB-based inter-frequency measurement object without measurement gap as defined in clause 9.3.1, when all of the SMTC occasions of this inter-frequency measurement object are overlapped by the NCSG;
- SSB-based inter-frequency measurement object with NCSG as defined in clause 9.3.1;
- E-UTRA inter-RAT measurement object, when the measurement can be performed with no measurement gap but NCSG as defined in clause [*TBD*];

UE is expected to conduct the measurement of this measurement object *i* only within the NCSG.

If the higher layer signaling in TS 38.331 [2] of *smtc2* is present for an intra-frequency measurement object, and *smtc1* is fully overlapping with NCSG and *smtc2* is partially overlapping with NCSG, requirements derived from $CSSF_{within_ncsg,i}$ and $CSSF_{outside_gap,i}$ are not applicable.

9.1.5.3.1 SA mode: carrier-specific scaling factor for measurements performed within NCSG

When one or more measurement objects are monitored within NCSG, the carrier specific scaling factor for a target measurement object with index *i* is designated as $CSSF_{within_ncsg,i}$ and is derived as described in this clause.

For each NCSG occasion *j*, count the total number of intra-frequency measurement objects and inter-frequency/inter-RAT measurement objects which are candidates to be measured within the occaison *j*.

- An NR measurement object with SSB measurement configured is a candidate to be measured in an NCSG occasion if its SMTC duration is fully covered by the ML. For intra-frequency NR measurement objects, if the higher layer in TS 38.331 [2] signaling of *smtc2* is configured, the assumed periodicity of SMTC occasions corresponds to the value of higher layer parameter *smtc2*; otherwise the assumed periodicity of SMTC occasions corresponds to the value of higher layer parameter *smtc1*.
- An inter-RAT E-UTRA measurement object configured is a candidate to be measured in all NCSG occasions.
- $M_{intra,i,j}$: Number of intra-frequency measurement objects which are candidates to be measured in NCSG occasion *j* where the measurement object *i* is also a candidate. Otherwise $M_{intra,i,j}$ equals 0.
- $M_{inter,i,j}$: Number of NR inter-frequency measurement objects and E-UTRA inter-RAT measurement objects which are candidates to be measured in NCSG occasion *j* where the measurement object *i* is also a candidate. Otherwise $M_{inter,i,j}$ equals 0.
- $M_{tot,i,j} = M_{intra,i,j} + M_{inter,i,j}$: Total number of intra-frequency, inter-frequency and inter-RAT measurement objects which are candidates to be measured in NCSG occasion *j* where the measurement object *i* is also a candidate. Otherwise $M_{tot,i,j}$ equals 0.

For UEs which support and are configured with per FR NCSG, the above counting is done on a per FR basis, and for UEs which are configured with per UE NCSG the counting is done on a per UE basis.

The carrier specific scaling factor $CSSF_{within_ncsg,i}$ is given by:

If *measGapSharingScheme* is equal sharing, $CSSF_{within_ncsg,i}= \max(M_{tot,i,j})$, where j=0…(160/VIRP)-1

If *measGapSharingScheme* is not equal sharing and

- measurement object *i* is an intra-frequency measurement object, $CSSF_{within_ncsg,i}$ is the maximum among
  - $\text{ceil}(K_{intra} \times M_{intra,i,j})$ in NCSG occasions where $M_{inter,i,j} \neq 0$, where j=0…(160/VIRP)-1
  - $M_{intra,i,j}$ in NCSG occasions where $M_{inter,i,j}=0$, where j=0…(160/VIRP)-1
- measurement object *i* is an inter-frequency or inter-RAT measurement object, $CSSF_{within_ncsg,i}$ is the maximum among
  - $\text{ceil}(K_{inter} \times M_{inter,i,j})$ in NCSG occasions where $M_{intra,i,j} \neq 0$, where j=0…(160/VIRP)-1
  - $M_{inter,i,j}$ in NCSG occasions where $M_{intra,i,j}=0$, where j=0…(160/VIRP)-1

9.1.6 Minimum requirement at transitions

When the measurement on one intra-frequency measurement object transitions from measurements performed outside gaps to measurements performed within gaps or vice versa during one measurement period, the cell identification and measurement period requirements with the longer delay apply.

The carrier-specific scaling factor specified in clause 9.1.5 that applies to the other impacted measurement objects will also apply based on the longer measurement or cell identification delay before or after the transition.

When the UE transitions between DRX and non-DRX or when DRX cycle periodicity changes, the cell identification and measurement period requirements apply based on the longer delay before or after the transition.

Subsequent to this measurement period, the cell identification and measurement period requirements on each measurement object are corresponding to the second mode after transition.

9.1.7 Pre-configured measurement gap

9.1.7.1 Introduction

A UE capable of Pre-configured measurement gap (Pre-MG) pattern can be configured with a Pre-MG pattern via RRC signalling [2].

The gap interruption requirements in Section 9.1.2 apply to Pre-MG when Pre-MG is activated, and no gap interruption is expected when Pre-MG is deactivated.

- The requirements apply for NR standalone operation with single carrier and NR CA.

9.1.7.2 Requirements applicability

The requirements related to pre-configured measurement gap apply provided:

- UE indicates support of *preconfiguredUE-AutonomousMeasGap* [2] and/or *preconfiguredNW-ControlledMeasGap* [2], and
- either a single per-UE measurement gap is pre-configured by the network, or one or two per-FR measurement gaps are pre-configured by the network, and

- one of measurement gap patterns among measurement gap patterns #0 ~ #25 is configured for pre-configured measurement gap, and
- UE is in NR SA with single carrier or with NR CA.

A measurement gap is configured as pre-configured measurement gap if *preConfigInd* is indicated by network in the configuration message of the measurement gap.

If UE indicates support of only *preconfiguredNW-ControlledMeasGap* [2], UE can expect the network to configure *preConfGapStatus*.

If a measurement gap is configured as pre-configured measurement gap, the applicability of measurement gap patterns is defined in Table 9.1.2-3.

When a pre-configured measurement gap is used to perform PRS measurements, the UE will inform the network that it is going to start/stop PRS measurements with the configured pre-configured measurement gap by initiating the existing *LocationMeasurementIndication* procedure.

If the Pre-MG status changes during a measurement period of a measurement that can be performed without and within measurement gaps, the UE is allowed to restart the measurement.

If the Pre-MG status changes from activated to deactivated during a measurement period of a measurement that can only be performed within measurement gaps, the measurement requirements do not apply.

9.1.7.3 Requirements

Any of the measurement Gap pattern #0 to #25 defined in Table 9.1.2-1 can be configured as Pre-MG pattern.

The UE can determine the Pre-MG status based on autonomous activation/deactivation mechanism or based on network-controlled activation/deactivation mechanism.

A UE capable of both autonomous and network-controlled mechanisms for activation/deactivation of Pre-MG pattern will not use autonomous rules to determine the activation/deactivation status of the pre-configured MG if the network provides the activation/deactivation status via RRC indication *preConfGapStatus* for all the DL BWPs of all the activated CCs, and for all the deactivated SCCs.

9.1.7.3.1 Requirements for autonomous activation/deactivation mechanism

Requirements in this section apply when autonomous mechanism [2] is used for activation/deactivation of Pre-MG pattern.

The UE can autonomously change the Pre-MG status from activation to deactivation or vice versa based on any of the following triggering conditions listed below. The UE shall also autonomously determine the Pre-MG status based on all the concurrent triggering conditions occurring jointly:

- DCI, timer or RRC based active BWP switching,
- Activation/deactivation of SCell(s),
- Addition/removal of any measurement object(s)
- Addition/release/change of a SCell in carrier aggregation,

The UE shall autonomously determine the status of the per-UE Pre-MG pattern as deactivated immediately after the configuration of the per-UE Pre-MG pattern or when any of the triggering conditions above is satisfied provided that all the configured measurements can be performed without measurement gaps. The UE shall autonomously determine the status of the per-FR Pre-MG pattern as deactivated immediately after the configuration of the per-FR Pre-MG pattern or when any of the triggering conditions above is satisfied provided that all the configured measurements in the same FR can be performed without measurement gaps.

A measurement can be performed by the UE without measurement gaps if any of the following conditions is met:

- The UE is configured with SSB based intra-frequency measurements, and the conditions defined for SSB based intra-frequency measurement without gaps in Clause 9.2.1 are met, or

- The UE is configured with SSB based inter-frequency measurements, and the conditions defined for SSB based inter-frequency measurement without gaps in Clause 9.3.1 are met, or

- The UE is configured with CSI-RS based intra-frequency measurements.

The UE shall autonomously determine the status of the per-UE Pre-MG pattern as activated immediately after the configuration of the per-UE Pre-MG pattern or when any of the triggering conditions above is satisfied provided that at least one of the configured measurements cannot be performed without measurement gaps. The UE shall autonomously determine the status of the per-FR Pre-MG pattern as activated immediately after the configuration of the per-FR Pre-MG pattern or when any of the triggering conditions above is satisfied provided that at least one of the configured measurements in the same FR cannot be performed without measurement gaps.

A measurement cannot be performed by the UE without measurement gaps if any of the following conditions is met:

- The UE is configured with SSB based intra-frequency measurements, and the conditions defined for SSB based intra-frequency measurement without gaps in Clause 9.2.1 are not met, or

- The UE is configured with SSB based inter-frequency measurements, and the conditions defined for SSB based inter-frequency measurement without gaps in Clause 9.3.1 are not met, or

- The UE is configured with any of the following measurements:

  - CSI-RS based inter-frequency measurements, or

  - E-UTRA Inter-RAT measurements, or

  - UTRA Inter-RAT measurements.

9.1.7.3.2 Requirements for network-controlled activation/deactivation mechanism

The requirements in this section apply when network-controlled mechanism [2] is used for activation/deactivation of Pre-MG pattern.

For per-UE Pre-configured MG,

- the UE determines that the Pre-configured MG is activated if *preConfGapStatus* is set to '1' for the corresponding gap ID for the active DL BWP of any of the activated CCs, or if *preConfGapStatus* is set to '1' for the corresponding gap ID for any of the deactivated SCCs,

- otherwise, the UE determines that the Pre-configured MG is deactivated

For per-FR Pre-configured MG,

- the UE determines that the Pre-configured MG is activated if *preConfGapStatus* is set to '1' for the corresponding gap ID for the active DL BWP of any of the activated CCs in the corresponding FR, or if *preConfGapStatus* is set to '1' for the corresponding gap ID for any of the deactivated SCCs in the corresponding FR,

- otherwise, the UE determines that the Pre-configured MG is deactivated

9.1.7.3.3 Requirements for reception/transmission during activation/deactivation

The requirements in this section apply when autonomous mechanism or network-controlled mechanism is used for activation/deactivation [2] of Pre-MG pattern.

If per-UE Pre-MG pattern is activated then the UE is not required to conduct reception/transmission from/to the corresponding serving cells during the gap occasion according to the same principles as described for per-UE measurement gaps in clause 9.1.2. Otherwise, the UE can be scheduled for reception/transmission of signals in all the serving cells during the gap occasion.

If per-FR Pre-MG pattern is activated then the UE is not required to conduct reception/transmission from/to the corresponding serving cells during the gap occasion on the same FR according to the same principles as described for per-FR measurement gaps in clause 9.1.2. Otherwise, the UE can be scheduled for reception/transmission of signals in all the serving cells during the gap occasion in the same FR.

9.1.8 Concurrent measurement gaps

9.1.8.1 Introduction

When UE supports concurrent measurement gap pattern capability, network can provide multiple measurement gaps configured by RRC message(s) as specified in TS 38.331 [2]. Requirements in this section applies when the UE is in SA operation mode.

9.1.8.2 Requirements

If the UE requires measurement gaps to identify and measure intra-frequency cells and/or inter-frequency cells and/or inter-RAT E-UTRAN cells, and the UE supports concurrent measurement gap patterns but does not support independent measurement gap patterns for different frequency ranges as specified in Table 5.1-1 in [18, 19, 20], in order for the requirements in the following clauses to apply the network can provide at most two per-UE measurement gap patterns for monitoring of all frequency layers.

If the UE requires measurement gaps to identify and measure intra-frequency cells and/or inter-frequency cells and/or inter-RAT E-UTRAN cells, and the UE supports both concurrent measurement gap patterns and independent measurement gap patterns for different frequency ranges as specified in Table 5.1-1 in [18, 19, 20], in order for the requirements defined for concurrent measurement gaps to apply the network can provide the following measurement gap patterns'combinations for monitoring of all frequency layers. The supported measurement gap combination configurations for UE supporting both concurrent measurement gap patterns and independent measurement gap patterns for different frequency ranges are specified in Table 9.1.8-1.

Table 9.1.8-1: The number of Gap Combination Configurations by UE supporting both concurrent measurement gap patterns and independent measurement gap patterns

Gap Combination Configuration Id	The number of simultaneous configured measurement gap patterns		
	Per-FR1 measurement gap	Per-FR2 measurement gap	Per-UE measurement gap
0	2	1	0
1	1	2	0
2	0	0	2
3 Note 1	1	0	1
4 Note 1	0	1	1
5 Note 1	1	1	1
6	2	0	0
7	0	2	0

Note 1: Gap Combination Configuration Id #3, #4, #5 will be only applied when the per-UE measurement gap is associated to measure PRS for any RSTD, PRS-RSRP, and UE Rx-Tx time difference measurement defined in TS 38.215 [4].

For UE configured in the SA operation mode, when monitoring of multiple inter-RAT E-UTRAN carrier frequency layers and inter-frequency NR carrier frequency layers as configured by PCell using gaps, each monitored carrier frequency layer, including following measurement types:

- a measurement object with SSB based measurement,
- a measurement object with CSI-RS based measurement,

- E-UTRA inter-RAT measurement object,
- E-UTRAN inter-RAT RSTD measurement,
- NR PRS-based positioning measurements,

can be only associated to one measurement gap pattern. Requirements for concurrent measurement gaps apply provided that each frequency layer is only associated with one concurrent measurement gap. There can be one or more frequency layers associated with each concurrent measurement gap. Furthermore, when only E-UTRAN measurement objects are configured for the UE, if the UE is not capable of concurrentMeasGapEUTRA-r17[2], all E-UTRAN measurement objects are expected to be associated with a single concurrent gap pattern.

Editor Notes: Whether all E-UTRAN measurement objects are expected to be associated with a single concurrent gap pattern or not when both E-UTRAN measurement objects and other type of measurements are configured for the UE, still FFS.

When UE supports concurrent measurement gap patterns, each measurement gap pattern supported by the UE is listed in Table 9.1.2-1 based on the applicability specified in table 9.1.2-3.

The requirements in clause 9.1.2 are also applicable for the UE capable of and configured with multiple concurrent measurement gap patterns within each measurement gap pattern.

When UE supports concurrent measurement gap patterns and configured with more than 1 measurement gap pattern Per FR or Per-UE according to table 9.1.8-1, requirements does not apply if the UE is configured with more than one measurement gap pattern (MGP) with measurement gap repetition period (MGRP) of 20ms in an FR.

9.1.8.3 Collision between concurrent measurement gaps

Collisions between occasions of two concurrent measurement gaps may occur as specified in this clause if the two measurement gaps are

- two per-UE measurement gaps, or
- two per-FR measurement gaps in the same FR, or
- one per-UE measurement gap and one per-FR measurement gap.

When UE is configured with concurrent measurement gaps, two measurement gap occasions are considered colliding if at least one of the following conditions is met:

- the two occasions are fully or partially overlapping in time domain, or
- the distance between the two occasions is equal to or smaller than 4ms.

The distance between two measurement gap occasions is defined as the time difference between the ending point of the first occasion and the starting point of the second occasion, where the first measurement gap occasion occurs earlier in time than the second measurement gap occasion.

In case of collision between two measurement gap occasions, the UE shall perform measurements in the occasion of the measurement gap with higher priority, and the occasion of the measurement gap with lower priority shall be dropped. The UE shall be able to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI in the corresponding NR serving cells in the slots that are not interrupted according to requirements in clause 9.1.8.4.

The requirements of concurrent measurement gaps in section 9 shall not apply when a gap without assigned priority is configured simultaneously with any other gap(s) that affect serving carriers in the same FR and the measurement gaps are colliding with each other.

The priority for a measurement gap is configured by networks via *gapPriority* in *GapConfig*. The requirements with concurrent measurement gaps apply provided that two measurement gaps colliding with each other are configured with different priorities.

9.1.8.4 Measurement gap related requirements of concurrent measurement gaps

A slot is considered as interrupted if it is interrupted by an occasion of any of the configured concurrent measurement gaps following the measurement gap interruption requirements in clause 9.1.2, except for a dropped measurement gap occasion.

9.1.9 Network controlled small gap

9.1.9.1 Introduction

The UE capable of network controlled small gap (NCSG) pattern can be configured with a NCSG pattern via RRC signalling [2].

This clause contains the general requirements on the UE regarding to Network Controlled Small Gap (NCSG).

The requirements in this clause are applicable for UE configured with SA NR (with single carrier or NR CA) operation mode.

It is up to UE implementation whether or not the UE is able to conduct transmission in the following slot(s),

- when *mgta* is not applied, in the L consecutive UL slots with respect to the SCS of the UL carrier with the same slot indices as the DL slots occurring immediately after the last each of the interrupted slots after VIL1 and VIL2.
- when *mgta* is applied and the SCS of the UL carrier is other than 15kHz, in the L consecutive UL slots with respect to the SCS of the UL carrier with the same slot indices as the DL slots occurring immediately after the last each of the interrupted slots after VIL1 and VIL2.
- when *mgta* is applied and the SCS of the UL carrier is 15kHz, in the L consecutive UL slots with respect to the SCS of the UL carrier with the same slot indices as the DL slots occurring immediately after the slot partially overlapped with each of the interrupted slots after VIL1 and VIL2.

where UL slot denotes that all the symbols in the slot are uplink symbols, and L=1 if $(N_{\mathrm{TA}} + N_{\mathrm{TA\ offset}}) \times T_{\mathrm{c}}$ for the UL transmission is less than the length of one slot; L=2 otherwise.

Note: Network is supposed to take into account the possible difference between the estimated TA at network and actual TA at UE when scheduling UE in the above slot(s).

The interruptions of NCSG in number of slots are listed in Table 9.1.9-1 on all serving cells when per-UE NCSG is configured or on FR1 serving cells when per-FR FR1 NCSG is configured to *ncsg-MeasGapPerFR-r17* capable UE. In case that the UE capable of *ncsg-MeasGapPerFR-r17* is configured with per-FR FR2 NCSG, numbers of interrupted slots on FR2 serving cells are listed in Table 9.1.9-2. There are two interruptions in each NCSG occasion, VIL1 before ML and VIL2 after ML, in NR standalone (with single carrier or NR CA). Each of them has number of interrupted slots captured in Table 9.1.9-1 and Table 9.1.9-2.

Table 9.1.9-1: Number of interrupted slots on all serving cells for per-UE NCSG or FR1 serving cells for FR1 NCSG during each VIL in NR standalone operation (with single carrier, NR CA)

NR SCS (kHz)	Number of interrupted slots on serving cells When MG timing advance of 0ms is applied VIL=1ms
15	1
30	2
60	4
120	8
NOTE 1: NR SCS of 120 kHz is only applicable to the case with per-UE NCSG. NOTE 2: Void	

Table 9.1.9-2: Number of interrupted slots on FR2 serving cells for FR2 NCSG during each VIL in NR standalone operation (with single carrier, NR CA)

NR SCS (kHz)	Number of interrupted slots on serving cells	
	When MG timing advance of 0ms is applied	When MG timing advance of 0.75ms is applied
	VIL=0.75ms	VIL=0.75ms
60	3	3
120	6	6
NOTE 1: Void		

9.1.9.2 Requirements applicability

Requirements in clause 9.1.9 apply for UE capable of NCSG in standalone NR in both FR1 and FR2 (including FR1+FR2 CA), provided UE is configured with only NCSG and no other measurement gap is configured, and UE is configured with

SSB based intra-frequency measurement (including measurement on de-activated SCC and measurement on dormant SCell), and/or

SSB based inter-frequency measurement, and/or

Inter-RAT E-UTRAN measurement.

Requirements in clause 9.1.9 do not apply if UE is configured with

Inter-RAT GSM measurement, or

Inter-RAT UTRAN measurement, or

PRS measurement.

9.1.9.3 Requirements

The UE shall support NCSG patterns defined in Table 9.1.9.3-1 that are relevant to the UE's measurement capabilities. ML is the measurement length. During the VIL1 and VIL2, the UE is not expected to transmit and receive any data. Where, VIL1 is the visible interruption length before the ML and VIL2 is the visible interruption length after the ML. During ML, whether the UE is expected to transmit and receive data on the corresponding serving carrier(s) depends on the scheduling restriction requirements specified in clauses 9.2.7.3 and 9.3.10.3. The NCSG configuration parameters VIL1, ML, VIL2 and VIRP are illustrated in Figure 9.1.9.3-1. The applicability of the NCSG patterns in Table 9.1.9.3-1 is specified in Table 9.1.9.3-2.

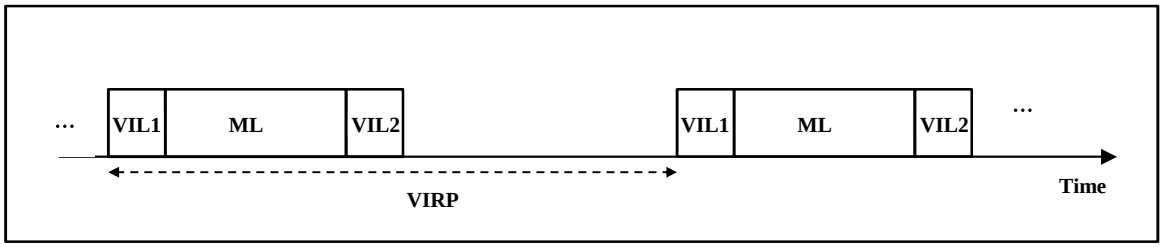

Figure 9.1.9.3-1: Illustration of NCSG configuration parameters: VIL1, ML, VIL2 and VIRP

Table 9.1.9.3-1: NCSG Configurations supported by the UE

NCSG Pattern Id	Measurement Length during which there is no gap (ML, ms)	Visible interruption Repetition Period (VIRP, ms)

0	5	40
1	5	80
2	2	40
3	2	80
4	5	20
5	5	160
6	3	20
7	3	40
8	3	80
9	3	160
10	2	20
11	2	160
12	5	20
13	5	40
14	5	80
15	5	160
16	3	20
17	3	40
18	3	80
19	3	160
20	1	20
21	1	40
22	1	80
23	1	160

Table 9.1.9.3-2: Applicability for NCSG pattern configurations supported by the UE for NR standalone operation with single carrier or NR CA configuration

NCSG pattern configuration	Serving cell	Measurement Purpose NOTE 2	Applicable NCSG Pattern Id
Per-UE NCSG	FR1, or FR1 + FR2	E-UTRA	0,1,2,3
		FR1 and/or FR2	0-11, 24
		E-UTRA and FR1 and/or FR2	0, 1, 2, 3, 4, 6, 7, 8,10
	FR2	E-UTRA only	0,1,2,3
		FR1 only	0-11
		FR1 and FR2	0-11
		E-UTRA and FR1 and/or FR2	0, 1, 2, 3, 4, 6, 7, 8,10
		FR2 only	12-23
Per-FR NCSG	FR1 if configured	E-UTRA only	0,1,2,3
	FR2 if configured		No gap
	FR1 if configured	FR1 only	0-11
	FR2 if configured		No gap
	FR1 if configured	FR2 only	No gap
	FR2 if configured		12-23
	FR1 if configured	E-UTRA and FR1	0, 1, 2, 3, 4, 6, 7, 8,10
	FR2 if configured		No gap
	FR1 if configured	FR1 and FR2	0-11
	FR2 if configured		12-23
	FR1 if configured	E-UTRA and FR2	0, 1, 2, 3, 4, 6, 7, 8,10
	FR2 if configured		12-23
	FR1 if configured	E-UTRA and FR1 and FR2	0, 1, 2, 3, 4, 6, 7, 8,10
	FR2 if configured		12-23

NOTE 1: When E-UTRA inter-RAT RSTD measurements are configured and the UE requires NCSG for performing such measurements, only NCSG Pattern #0 can be used.
NOTE 2: Measurement purpose which includes E-UTRA measurements includes also inter-RAT E-UTRA RSRP and RSRQ measurements for E-CID; measurement purpose which includes E-UTRA measurements includes also E-UTRA RSRP and E-UTRA RSRQ measurements for E-CID.
NOTE 3: If per-UE NCSG is configured with MG timing advance of T_{MG} ms, the NCSG starts at time T_{MG} ms advanced to the end of the latest subframe occurring immediately before the configured NCSG among all serving cells subframes.
If per-FR NCSG for FR1 is configured with MG timing advance of T_{MG} ms, the NCSG for FR1 starts at time T_{MG} ms advanced to the end of the latest subframe occurring immediately before the configured NCSG among serving cells subframes in FR1.
If per-FR NCSG for FR2 is configured with MG timing advance of T_{MG} ms, the NCSG for FR2 starts at time T_{MG} ms advanced to the end of the latest subframe occurring immediately before the configured NCSG among serving cells subframes in FR2.
T_{MG} is the MG timing advance value provided in *mgta* according to [2].
In determining the NCSG starting point, UE shall use the DL timing of the latest subframe occurring immediately before the configured NCSG among serving cells.
NOTE 4: For UE only supporting *ncsg-MeasGapNR-Patterns-r17* for any NCSG patterns among NCSG pattern # 2-11, the corresponding NCSG patterns are not applicable to measurement of E-UTRA.

9.1.10 MUSIM gaps

If the UE requires gap patterns for MUSIM purpose, such as cell identification and measurement, paging monitoring, SIB acquisition, and/or on-demand SI request of the target cell in the target network, then the network may provide one or more per-UE MUSIM gap pattern(s) for concurrent monitoring of all frequency layers for MUSIM via *MUSIM-GapConfig* [2]. The UE can be configured with no more than three periodic MUSIM gap patterns and/or one aperiodic MUSIM gap pattern for MUSIM via *MUSIM-GapConfig* [2]. The MUSIM gap patterns specified in Table 9.1.10-1 are applicable only for MUSIM operation.

The UE is not required to perform cell identification and measurement, paging monitoring, SIB acquisition, and/or on-demand SI request of the target cell in the target network that is outside the MUSIM gaps.

UE supporting MUSIM capability shall support the MUSIM gap patterns listed in Table 9.1.10-1 based on UE's capability specified in TS38.306[14] and the applicability specified in Table 9.1.10-2.

UE determines MUSIM gap timing based on gap offset configuration from serving cell provided by higher layer signalling as specified in TS 38.331 [2].

Table 9.1.10-1: MUSIM Gap Pattern Configurations

MUSIM Gap Pattern Id	MUSIM Gap Length (MGL, ms)	MUSIM Gap Repetition Period (MGRP, ms)
0	6	40
1	6	80
2	3	40
3	3	80
4	6	20
5	6	160
6	4	20
7	4	40
8	4	80
9	4	160
10	3	20
11	3	160
12	10	80
13	20	160
14	6	320
15	6	640
16	6	1280
17	6	2560
18	10	320
19	10	640
20	10	1280
21	10	2560

22	20	320
23	20	640
24	20	1280
25	20	2560
26	20	5120
27	10	NA
28	20	NA
Note 1: Measurement gap pattern #27, #28 are the aperiodic gap pattern without MGRP.		

Table 9.1.10-2: Applicability for MUSIM Gap Pattern Configurations supported by the UE with NR standalone operation (with single carrier, NR CA configuration)

MUSIM gap pattern configuration	Serving cell	Gap Purpose	Applicable MUSIM Gap Pattern Id
Per-UE MUSIM gap	FR1, FR2, or FR1 + FR2	MUSIM Note1	0-13, 14-26, 27, 28
NOTE 1: Inclusion of MUSIM procedures for per-UE MUSIM gaps only in NR single carrier, NR CA mode: MUSIM purpose which includes cell identification and measurement, paging monitoring, SIB acquisition, and/or on-demand SI request of the target cell in the target network.			

9.1.11 UL gap for Tx power management

The UL gap patterns for TX power management are listed in Table 9.1.11-1 if UE supports the UL gap for Tx power management, and the UE shall support at least one of UL MGP#1 and UL MGP#3. All other UL MGPs are optional.

Table 9.1.11-1: UL Gap Pattern Configurations

	UL Gap Length (UGL) [ms]	UL gap repetition periodicity (UGRP) [ms]
UL MGP #0	1.0	20
UL MGP #1	1.0	40
UL MGP #2	0.5	160
UL MGP #3	0.125 when SCS of active UL BWP =120kHz 0.25 when SCS of active UL BWP =60kHz	5

An uplink gap consists of consecutive static UL slot(s) in one or more *TDD-UL-DL-Pattern* duration, starting from the first static UL slot of an UL gap repetition period. UGL is the aggregated length of consecutive UL slots used as the UL gap within an UL gap repetition period. That means, there can be a DL slot and/or special slot but no static UL slot between the two consecutive static UL slots within the UL gap length.

When an UL gap overlaps with an uplink transmission in NR serving cells in FR2 single CC or FR2 intra-band CA or FR2 inter-band CA where UE does not support tx-Support-UL-GapFR2-r17, then the UE is not required to conduct any transmission during the UL gap on the NR serving cells other than those listed in Clause 5.30 in TS 38.321 [7].

9.1A General measurement requirement for RedCap

9.1A.1 Introduction

This clause contains general requirements on the RedCap UE regarding measurement reporting in RRC_CONNECTED state. The requirements are split in intra-frequency, inter-frequency, inter-RAT E-UTRAN FDD, inter-RAT E-UTRAN TDD, and L1-RSRP measurements requirements. These measurements may be used by the NG-RAN. The measurement

quantities are defined in TS38.215 [4], the measurement model is defined in TS38.300 [10], TS37.340 [17] and measurement accuracies are specified in clause 10. Control of measurement reporting is specified in TS 38.331 [2].

The SSB and SMTC in this section applies for both CD-SSB and NCD-SSB if it is not additional specified.

9.1A.2 Measurement gap

If the UE requires measurement gaps to identify and measure intra-frequency cells and/or inter-frequency cells and/or inter-RAT E-UTRAN cells, and the UE does not support independent measurement gap patterns for different frequency ranges as specified in Table 5.1-1 in [18, 19, 20], in order for the requirements in the following clauses to apply the network must provide a single per-UE measurement gap pattern for concurrent monitoring of all frequency layers.

If the UE requires measurement gaps to identify and measure intra-frequency cells and/or inter-frequency cells and/or inter-RAT E-UTRAN cells, and the UE supports independent measurement gap patterns for different frequency ranges as specified in Table 5.1-1 in [18, 19, 20], in order for the requirements in the following clauses to apply the network must provide either per-FR measurement gap patterns for frequency range where UE requires per-FR measurement gap for concurrent monitoring of all frequency layers of each frequency range independently, or a single per-UE measurement gap pattern for concurrent monitoring of all frequency layers of all frequency ranges.

During the per-UE or per-FR measurement gaps the UE:

- is not required to conduct reception/transmission from/to the corresponding NR serving cell for SA (with single carrier) except the reception of signals used for RRM measurement(s), and the signals used for random access procedure according to [7].

UEs shall support the measurement gap patterns listed in Table 9.1A.2-1 based on the applicability specified in Table 9.1A.2-2. UE determines measurement gap timing based on gap offset configuration and measurement gap timing advance configuration provided by higher layer signalling as specified in TS 38.331 [2] and TS 36.331 [16].

Table 9.1A.2-1: Gap Pattern Configurations

Gap Pattern Id	Measurement Gap Length (MGL, ms)	Measurement Gap Repetition Period (MGRP, ms)
0	6	40
1	6	80
2	3	40
3	3	80
4	6	20
5	6	160
6	4	20
7	4	40
8	4	80
9	4	160
10	3	20
11	3	160
12	5.5	20
13	5.5	40
14	5.5	80
15	5.5	160
16	3.5	20
17	3.5	40
18	3.5	80
19	3.5	160
20	1.5	20
21	1.5	40
22	1.5	80
23	1.5	160

Table 9.1A.2-2: Applicability for Gap Pattern Configurations supported by the RedCap UE with NR standalone operation (with single carrier)

Measurement gap pattern configuration	Serving cell	Measurement Purpose	Applicable Gap Pattern Id
Per-UE measurement gap	FR1	non-NR RAT NOTE2	0,1,2,3
		FR1 and/or FR2	0-11
		non-NR RAT and FR1 and/or FR2 NOTE2	0, 1, 2, 3, 4, 6, 7, 8,10
	FR2	non-NR RAT only NOTE2	0,1,2,3
		FR1 only	0-11
		FR1 and FR2	0-11
		non-NR RAT and FR1 and/or FR2 NOTE2	0, 1, 2, 3, 4, 6, 7, 8,10
		FR2 only	12-23
Per-FR measurement gap	FR1 if configured	non-NR RAT only NOTE2	0,1,2,3
	FR2 if configured		No gap
	FR1 if configured	FR1 only	0-11
	FR2 if configured		No gap
	FR1 if configured	FR2 only	No gap
	FR2 if configured		12-23
	FR1 if configured	non-NR RAT and FR1 NOTE2	0, 1, 2, 3, 4, 6, 7, 8,10
	FR2 if configured		No gap
	FR1 if configured	FR1 and FR2	0-11
	FR2 if configured		12-23
	FR1 if configured	non-NR RAT and FR2 NOTE2	0, 1, 2, 3, 4, 6, 7, 8,10
	FR2 if configured		12-23
	FR1 if configured	non-NR RAT and FR1 and FR2 NOTE2	0, 1, 2, 3, 4, 6, 7, 8,10
	FR2 if configured		12-23

NOTE1: If per-UE measurement gap is configured with MG timing advance of T_{MG} ms, the measurement gap starts at time T_{MG} ms advanced to the end of the latest subframe occurring immediately before the configured measurement gap among all serving cells subframes.
If per-FR measurement gap for FR1 is configured with MG timing advance of T_{MG} ms, the measurement gap for FR1 starts at time T_{MG} ms advanced to the end of the latest subframe occurring immediately before the configured measurement gap among serving cells subframes in FR1.
If per-FR measurement gap for FR2 is configured with MG timing advance of T_{MG} ms, the measurement gap for FR2 starts at time T_{MG} ms advanced to the end of the latest subframe occurring immediately before the configured measurement gap among serving cells subframes in FR2.
T_{MG} is the MG timing advance value provided in *mgta* according to [2].
In determining the measurement gap starting point, UE shall use the DL timing of the latest subframe occurring immediately before the configured measurement gap among serving cells.
NOTE 2: In RedCap, non-NR RAT means E-UTRA only.
NOTE 3: For UE only supporting *supportedGapPattern-NRonly* for any gap patterns among GP2-11, the corresponding gap patterns are not applicable to measurement of non-NR RAT as defined in NOTE 2.

If measurement gap is configured in one FR but measurement object is not configured in the FR, the scheduling opportunity in the FR depends on the configured measurement gap pattern.

For NR standalone operation (with single carrier), if UE is not capable of per-FR-gap, total interruption time on a serving cell during MGL is defined when MGL(N) = 6ms, 5.5ms, 4ms, 3.5ms, 3ms, and 1.5ms. And if UE is capable of per-FR-gap, total interruption time on FR1 serving cell during MGL is defined only when MGL(N) = 6ms, 4ms, and 3ms, and total interruption time on FR2 serving cell during MGL is defined only when MGL(N) = 5.5ms, 3.5ms, and 1.5ms.

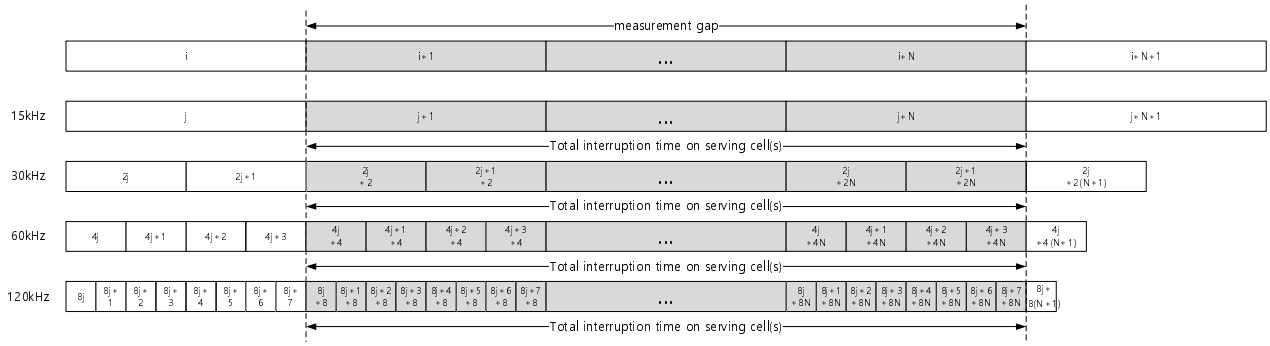

(a) Measurement gap with MGL = N(ms) with MG timing advance of 0ms for serving cell in synchronous NR standalone operation (with single carrier)

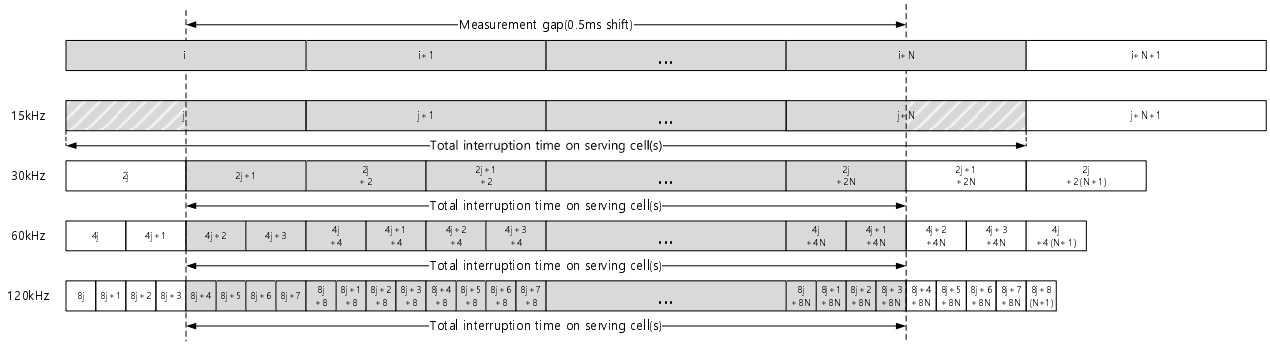

(b) Measurement gap with MGL = N(ms) with MG timing advance of 0.5ms for serving cell in synchronous NR standalone operation (with single carrier)

Figure 9.1A.2-1: Measurement GAP and total interruption time on serving cell for NR standalone operation (with single carrier)

The corresponding total number of interrupted slots on serving cell is listed in Table 9.1A.2-3 for serving cell in NR standalone (with single carrier).

Table 9.1A.2-3: Total number of interrupted slots on serving cell during MGL for NR standalone operation (with single carrier) with per-UE measurement gap or per-FR measurement gap for FR1

NR SCS (kHz)	Total number of interrupted slots on serving cell					
	When MG timing advance of 0ms is applied			When MG timing advance of 0.5ms is applied		
	MGL=6ms	MGL=4ms	MGL=3ms	MGL=6ms	MGL=4ms	MGL=3ms
15	6	4	3	7[Note3]	5[Note3]	4[Note3]
30	12	8	6	12	8	6
60	24	16	12	24	16	12
120	48	32	24	48	32	24

NOTE 1: For Gap Pattern ID 0, 1, 2 and 3, total number of interrupted subframes on serving cell is MGL subframes when MG timing advance of 0ms is applied, and (MGL+1) subframes when MG timing advance of 0.5ms is applied.
NOTE 2: NR SCS of 120 kHz is only applicable to the case with per-UE measurement gap.
NOTE 3: Non-overlapped half-slots occur before and after the measurement gap. Whether a RedCap UE can receive and/or transmit in those half-slots is up to UE implementation.

In case that UE capable of per-FR measurement gap is configured with per-UE measurement gap or per-FR measurement gap for FR2 serving cell, total number of interrupted slots on FR2 serving cells during MGL is listed in Table 9.1A.2-3a.

Table 9.1A.2-3a: Total number of interrupted slots on FR2 serving cell during MGL for NR standalone operation (with single carrier) with per-UE measurement gap or per-FR measurement gap for FR2

NR SCS (kHz)	Total number of interrupted slots on FR2 serving cell					
	When MG timing advance of 0ms is applied			When MG timing advance of 0.25ms is applied		
	MGL=	MGL=	MGL=	MGL=	MGL=	MGL=

	5.5ms	3.5ms	1.5ms	5.5ms	3.5ms	1.5ms
60	22	14	6	22	14	6
120	44	28	12	44	28	12
NOTE 1: The total number of interrupted slots is based on that SFN and subframe reference for per-FR gap in FR2 indicated by high layer parameter *refServCellIndicator* is an FR2 serving cell.						
NOTE 2: Slot occurs before or after the measurement gap may be interrupted additionally if SFN and subframe reference for per-FR gap in FR2 indicated by high layer parameter refServCellIndicator is an FR1 serving cell.						

It is up to UE implementation whether or not the UE is able to conduct transmission in the following slot(s),

- when MGTA is not applied, in the L consecutive UL slots with respect to the SCS of the UL carrier with the same slot indices as the DL slots occurring immediately after measurement gap
- when MGTA is applied and the SCS of the UL carrier is other than 15kHz, in the L consecutive UL slots with respect to the SCS of the UL carrier with the same slot indices as the DL slots occurring immediately after measurement gap
- when MGTA is applied and the SCS of the UL carrier is 15kHz, in the L consecutive UL slots with respect to the SCS of the UL carrier with the same slot indices as the DL slots occurring immediately after the slot partially overlapped with measurement gap

where UL slot denotes that all the symbols in the slot are uplink symbols, and L=1 if $(N_{\mathrm{TA}} + N_{\mathrm{TA\ offset}}) \times T_{\mathrm{c}}$ for the UL transmission is less than the length of one slot; L=2 otherwise.

9.1A.2.1 SA: Measurement Gap Sharing

For NR standalone UE configured with per-UE measurement gap, measurement gap sharing shall be applies when UE requires measurement gaps to identify and measure cells on an intra-frequency carrier or when SMTC configured for intra-frequency measurement are fully overlapping with per-UE measurement gaps, and when UE requires measurement gaps to identify and measure cells on inter-frequency carriers for SSB based L3 measurement, or when all of SMTC configured for inter-frequency SSB based measurement without measurement gaps are fully overlapping with per-UE measurement gaps or per-FR measurement gap, and/or inter-RAT E-UTRAN carriers.

For NR standalone UE configured with per-FR1 measurement gap, measurement gap sharing shall be applied when UE requires measurement gaps to identify and measure cells on FR1 intra-frequency carriers or when SMTC configured for FR1 intra-frequency measurement are fully overlapping with per-FR1 measurement gaps, and when UE requires measurement gaps to identify and measure cells on FR1 inter-frequency carriers for SSB based L3 measurement and/or inter-RAT E-UTRAN carriers, or when all of SMTC configured for inter-frequency SSB based measurement without measurement gaps are fully overlapping with per-FR1 measurement gaps.

For NR standalone UE configured with per-FR2 measurement gap, measurement gap sharing shall be applied when UE requires measurement gaps to identify and measure cells on FR2 intra-frequency carriers or when SMTC configured for FR2 intra-frequency measurement are fully overlapping with per-FR2 measurement gaps, and when UE requires measurement gaps to identify and measure cells on FR2 inter-frequency carriers for SSB based L3 measurement, or when all of SMTC configured for inter-frequency SSB based measurement without measurement gaps are fully overlapping with per-UE measurement gaps.

When network signals “01”, “10” or “11” with RRC parameter *MeasGapSharingScheme* [2] and the value of X is defined as in Table 9.1.2.1a-1, and

- $K_{intra} = 1 / X * 100$,
- $K_{inter} = 1 / (100 – X) * 100$,

When network signals “00” indicating equal splitting gap sharing, X is not applied.

The RRC parameter *MeasGapSharingScheme* shall be applied to the calculation of carrier specific scaling factor as specified in clause 9.1A.5.2.1.

9.1A.3 UE Measurement capability

9.1A.3.1 SA: Monitoring of multiple layers using gaps

The requirements in this clause are applicable for UE configured with SA NR operation mode.

When monitoring of multiple inter-RAT E-UTRAN carriers and inter-frequency NR carriers with gaps(or without using gaps provided the UE supports such capability or the effective MGRP is applied for per-FR measurement gap capable UE) is configured by PCell, the UE shall be capable of performing one measurement of the configured measurement type (SS-RSRP, SS-RSRQ, SS-SINR, E-UTRAN RSRP, E-UTRAN RSRQ, E-UTRAN RS-SINR measurements, etc.) of detected cells on all the layers.

For UE configured with the NR SA operation, the effective total number of frequencies, excluding the frequencies of the PCell being monitored, is $N_{freq, SA, RedCap}$, which is defined as:

$$N_{freq, SA, RedCap} = N_{freq, SA, NR, RedCap} + N_{freq, SA, E-UTRA, RedCap},$$

where

$N_{freq, SA, E-UTRA, RedCap}$ is the number of E-UTRA inter-RAT carriers being monitored (FDD and TDD) as configured by PCell,

$N_{freq, SA, NR, RedCap}$ is the number of NR inter-frequency carriers being monitored as configured by PCell.

9.1A.3.2 SA: Maximum allowed layers for multiple monitoring

If a UE is configured with SA NR operation mode, the UE shall be capable of monitoring at least:

- Depending on UE capability, 6 NR SSB inter-frequency carriers configured by PCell, and
- Depending on UE capability, 6 E-UTRA TDD inter-RAT carriers configured by PCell, and
- Depending on UE capability, 6 E-UTRA FDD inter-RAT carriers configured by PCell.

In addition to the requirements defined above, the UE shall be capable of monitoring a total of at least [10] effective carrier frequency layers comprising of any above defined combination of NR, E-UTRA FDD, and E-UTRA TDD layers.

If *ssbfrequency*, *smtc1*, *smtc2* and *ssbSubcarrierSpacing* are same in multiple MOs, the multiple MOs are counted as one SSB frequency layer.

9.1A.4 Capabilities for Support of Event Triggering and Reporting Criteria

9.1A.4.1 Introduction

This clause contains requirements on UE capabilities for support of event triggering and reporting criteria. As long as the measurement configuration does not exceed the requirements stated in clause 9.1A.4.2, the UE shall meet all other performance requirements defined in clause 9 and clause 10.

The UE can be requested to make measurements under different measurement identities defined in TS 38.331 [2]. Each measurement identity corresponds to either event-based reporting, periodic reporting, or no reporting. In case of event-based reporting, each measurement identity is associated with an event triggering criterion. In case of periodic reporting, a measurement identity is associated with one periodic reporting criterion. In case of no reporting, a measurement identity is associated with one no reporting criterion.

The purpose of this clause is to set some limits on the number of different event triggering, periodic, and no reporting criteria the UE may be requested to track in parallel.

9.1A.4.2 Requirements

In this clause a reporting criterion corresponds to either one event (in the case of event-based reporting), or one periodic reporting criterion (in case of periodic reporting), or one no reporting criterion (in case of no reporting). For event-based reporting, each instance of event, with the same or different event identities, is counted as separate reporting criterion in Table 9.1A.4.2-1.

The UE shall be able to support in parallel per category up to E_{cat} reporting criteria according to Table [9.1A.4.2-1]. For the measurement categories belonging to intra-frequency, inter-frequency, and inter-RAT measurements (i.e. without counting other categories that the UE shall always support in parallel), the UE need not support more than the total number of reporting criteria as follows:

- For UE configured with SA operation mode: $E_{cat,SA,NR,redCap} + E_{cat,SA,E-UTRA,redCap}$, where

  $E_{cat,SA,NR,redCap} = 19$ is the total number of NR reporting criteria according to Table 9.1A.4.2-1,

  $E_{cat,SA,E-UTRA,redCap}$ is the total number of inter-RAT E-UTRA reporting criteria according to Table 9.1A.4.2-1.

Table 9.1A.4.2-1: Requirements for reporting criteria per measurement category

Measurement category	E_{cat}	Note
Intra-frequency Note 1	9	Events for any one or a combination of intra-frequency SS-RSRP, SS-RSRQ, and SS-SINR for NG-RAN intra-frequency cells
Inter-frequency Note 1	10	Events for any one or a combination of inter-frequency SS-RSRP, SS-RSRQ, and SS-SINRfor NG-RAN inter-frequency cells
Inter-RAT (E-UTRA FDD, E-UTRA TDD) Note 1	10	Only applicable for UE with this (inter-RAT) capability. These reporting criteria apply for any E-UTRA carrier frequencies.
NOTE 1: Applicable for UE configured with SA NR operation mode.		

9.1A.5 Carrier-specific scaling factor

This clause specifies the derivation of carrier-specific scaling factor (CSSF) values, which scales the measurement delay requirements given in clause 9.2B, 9.3Band 9.4A when UE is configured to monitor multiple measurement objects. The CSSF values are categorized into $CSSF_{outside_gap_RedCap,i}$ and $CSSF_{within_gap_RedCap,i}$, for the measurements conducted outside measurement gaps and within measurement gaps, respectively.

9.1A.5.1 Monitoring of multiple layers outside gaps

The carrier-specific scaling factor $CSSF_{outside_gap_RedCap,i}$ for measurement object *i* derived in this chapter is applied to following measurement types:

- SSB-based intra-frequency measurement with no measurement gap in clause 9.2B.5, when none of the SMTC occasions of this intra-frequency measurement object are overlapped by the measurement gap.
- SSB-based intra-frequency measurement with no measurement gap in clause 9.2B.5, when part of the SMTC occasions of this intra-frequency measurement object are overlapped by the measurement gap.
- SSB-based inter-frequency measurement with no measurement gap in clause 9.3B.7, when none of the SMTC occasions of this inter-frequency measurement object are overlapped by the measurement gap, if UE supports *interFrequencyMeas-NoGap-r16* and the flag *interFrequencyConfig-NoGap-r16* is configured by the Network.
- SSB-based inter-frequency measurement with no measurement gap in clause [9.3B.7], when part of the SMTC occasions of this inter-frequency measurement object are overlapped by the measurement gap, if UE supports *interFrequencyMeas-NoGap-r16* and the flag *interFrequencyConfig-NoGap-r16* is configured by the Network.

UE is expected to conduct the measurement of this measurement object *i* only outside the measurement gaps.

If *ssbfrequency, smtc1, smtc2* and *ssbSubcarrierSpacing* are same in multiple MOs, the multiple MOs are counted as one SSB frequency layer.

If the higher layer signaling in TS 38.331 [2] of *smtc2* is present and *smtc1* is fully overlapping with measurement gaps and *smtc2* is partially overlapping with measurement gaps, $CSSF_{outside_gap_RedCap,i}$ and requirements derived from $CSSF_{outside_gap_RedCap,i}$ are not specified.

9.1A.5.1.1 SA mode: carrier-specific scaling factor for SSB-based measurements performed outside gaps

For UE in SA operation mode, the carrier-specific scaling factor $CSSF_{outside_gap_RedCap,i}$ for intra-frequency SSB-based measurements, inter-frequency SSB-based measurements performed outside measurements gaps, will be specified as follows:

$CSSF_{outside_gap,i}$ =1, if only one measurement object is configured to be measured outside of MG for RedCap.

$CSSF_{outside_gap,i}$ =2 for intra-frequency measurement, and $CSSF_{outside_gap,i}$ = 2*Y for inter-frequency measurement with no measurement gap, Y is the number of configured inter-frequency MOs without MG that are being measured outside of MG.

If intra-frequency measurement is with measurement gap, $CSSF_{outside_gap,i}$ = Y for inter-frequency measurement with no measurement gap, Y is the number of configured inter-frequency MOs without MG that are being measured outside of MG.

9.1A.5.2 Monitoring of multiple layers within gaps

The carrier-specific scaling factor $CSSF_{within_gap_RedCap,i}$ for a measurement object *i* derived in this chapter is applied to following measurement types:

- SSB-based intra-frequency measurement object with no measurement gap in clause 9.2B.5, when all of the SMTC occasions of this intra-frequency measurement object are overlapped by the measurement gap.
- SSB-based intra-frequency measurement object with measurement gap in clause 9.2B.6.
- SSB-based inter-frequency measurement object with measurement gap in clause 9.3B.4.
- SSB-based inter-frequency measurement object without measurement gap for UE capable of *interFrequencyMeas-NoGap* in clause 9.3B.7, when

  -all of the SMTC occasions of this inter-frequency measurement object are overlapped by the measurement gap, or

  - part of the SMTC occasions of this inter-frequency measurement object are overlapped by the measurement gap but the flag *interFrequencyConfig-NoGap-r16* is not configured by the Network- E-UTRA Inter-RAT measurement object in clauses 9.4A.2 and 9.4A.3.

UE is expected to conduct the measurement of this measurement object *i* only within the measurement gaps.

If the higher layer signaling in TS 38.331 [2] of *smtc2* is present and *smtc1* is fully overlapping with measurement gaps and *smtc2* is partially overlapping with measurement gaps, $CSSF_{within_gap_RedCap,i}$ and requirements derived from $CSSF_{outside_gap_RedCap,i}$ are not specified.

9.1A.5.2.1 SA mode: carrier-specific scaling factor for SSB measurements performed within gaps

When one or more measurement objects are monitored within measurement gaps, the carrier specific scaling factor for a target measurement object with index *i* is designated as $CSSF_{within_gap_RedCap,i}$ and is derived as described in this clause.

For each measurement gap *j* count the total number of intra-frequency measurement object and inter-frequency/inter-RAT measurement objects which are candidates to be measured within the gap *j*.

- An NR measurement object with SSB measurement configured is a candidate to be measured in a gap if its SMTC duration is fully covered by the MGL excluding RF switching time. For intra-frequency NR measurement object, if the higher layer in TS 38.331 [2] signaling of *smtc2* is configured, the assumed periodicity of SMTC occasions corresponds to the value of higher layer parameter *smtc2*; otherwise the assumed periodicity of SMTC occasions corresponds to the value of higher layer parameter *smtc1*.

- For UEs which support and are configured with per FR gaps, the counting is done on a per FR basis, and for UEs which are configured with per UE gaps the counting is done on a per UE basis.

- $M_{intra_RedCap,i,j}$: Number of intra-frequency measurement objects, which are candidates to be measured in gap *j* where the measurement object *i* is also a candidate. Otherwise $M_{intra,i,j}$ equals 0.

- $M_{inter_RedCap,i,j}$: Number of NR inter-frequency layers and EUTRA inter-RAT, which are candidates to be measured in gap *j* where the measurement object *i* is also a candidate. Otherwise $M_{inter_RedCap,i,j}$ equals 0.

- $M_{tot_RedCap,i,j} = M_{intra_RedCap,i,j} + M_{inter_RedCap,i,j}$: Total number of intra-frequency, inter-frequency and inter-RAT frequncy layers, which are candidates to be measured in gap *j* where the measurement object *i* is also a candidate. Otherwise $M_{tot_RedCap,i,j}$ equals 0.

The carrier specific scaling factor $CSSF_{within_gap_RedCap,i}$ is given by:

If *measGapSharingScheme* is equal sharing, $CSSF_{within_gap_RedCap,i} = \max(\text{ceil}(R_i \times M_{tot_RedCap,i,j}))$, where $j=0\ldots(160/MGRP)-1$

If *measGapSharingScheme* is not equal sharing and

- measurement object *i* is an intra-frequency measurement object, $CSSF_{within_gap_RedCap,i}$ is the maximum among
  - $\text{ceil}(K_{intra} \times M_{intra_RedCap,i,j})$ in gaps where $M_{inter_RedCap,i,j} \neq 0$, where $j=0\ldots(160/MGRP)-1$
  - $\text{ceil}(M_{intra_RedCap,i,j})$ in gaps where $M_{inter_RedCap,i,j}=0$, where $j=0\ldots(160/MGRP)-1$
- measurement object *i* is an inter-frequency or inter-RAT measurement object, $CSSF_{within_gap_RedCap,i}$ is the maximum among
  - $\text{ceil}(K_{inter} \times M_{inter_RedCap,i,j})$ in gaps where $M_{intra_RedCap,i,j} \neq 0$, where $j=0\ldots(160/MGRP)-1$
  - $\text{ceil}(M_{inter_RedCap,i,j})$ in gaps where $M_{intra_RedCap,i,j}=0$, where $j=0\ldots(160/MGRP)-1$

9.1A.6 Minimum requirement at transitions

When the measurement on one intra-frequency measurement object transitions from measurements performed outside gaps to measurements performed within gaps or vice versa during one measurement period, the cell identification and measurement period requirements with the longer delay apply.

The carrier-specific scaling factor specified in clause 9.1A.5 that applies to the other impacted measurement objects will also apply based on the longer measurement or cell identification delay before or after the transition.

When the UE transitions between DRX and non-DRX or when DRX cycle periodicity changes, the cell identification and measurement period requirements apply based on the longer delay before or after the transition.

When the intra-frequency measurement transitions from measurements performed on CD-SSB to measurements performed on NCD-SSB or vice versa due to BWP switching during one cell identification period, the UE shall use a cell identification period that is the maximum of the cell identification periods corresponding to the first SSB type and the second SSB type after the BWP switching.

When the intra-frequency measurement transitions from measurements performed on CD-SSB to measurements performed on NCD-SSB or vice versa due to BWP switching during one measurement period, the UE shall use a measurement period that is the maximum of the measurement periods corresponding to the first SSB type and the second SSB type after the BWP switching.

When the measurement on one measurement object transitions from inter-frequency measurement to intra-frequency measurement or vice versa due to BWP switching during one cell identification period, the UE shall use a cell

identification period that is the maximum of the cell identification periods corresponding to the first SSB type and the second SSB type after the BWP switching.

When the measurement on one measurement object transitions from inter-frequency measurement to intra-frequency measurement or vice versa due to BWP switching during one measurement period, the UE shall use a measurement period that is the maximum of the measurement periods corresponding to the first SSB type and the second SSB type after the BWP switching .

Subsequent to the above-mentioned measurement periods and/or cell identification periods, the cell identification and measurement period requirements on each measurement object are based on the SSB type after the BWP switch.

9.1C General measurement requirement

Editor's note: Applicability of frequency range, CA, DA, duplex mode, inter-RAT measurement, etc is subject to updates/changes based on the scope of the corresponding WID.

Editor's note: Terminology will be further clarified and selected between, e.g. NTN and satellite access, based on further agreements.

9.1C.1 Introduction

This clause contains general requirements on the UE regarding measurement reporting in RRC_CONNECTED state. The requirements are split in intra-frequency, inter-frequency and L1-RSRP measurements requirements. These measurements may be used by the NG-RAN. The measurement quantities are defined in TS38.215 [4], the measurement model is defined in TS38.300 [10], TS37.340 [17] and measurement accuracies are specified in clause 10. Control of measurement reporting is specified in TS 38.331 [2].

In the requirements of clause 9, the exceptions for side conditions apply as follows:

- for the UE configured with only PCell, which is served by SAN, the applicable exceptions for side conditions are specified in Annex B, clause [B.3.x.x] for UE supporting satellite access operation.

9.1C.2 Measurement gap

If the UE requires measurement gaps to identify and measure intra-frequency cells and/or inter-frequency cells, and the UE does not support independent measurement gap patterns for different frequency ranges as specified in Table 5.1-1 in [18, 19, 20], in order for the requirements in the following clauses to apply the network must provide a single per-UE measurement gap pattern for concurrent monitoring of all frequency layers.

If the UE requires measurement gaps to identify and measure intra-frequency cells and/or inter-frequency cells, and the UE supports independent measurement gap patterns for different frequency ranges as specified in Table 5.1-1 in [18, 19, 20], in order for the requirements in the following clauses to apply the network must provide a single per-UE measurement gap pattern for concurrent monitoring of all frequency layers of all frequency ranges.

For the UE configured with only PCell, which is served by SAN, if the UE requires measurement gaps to identify and measure cells operating in satellite access network and/or TN cells, and the UE does not support independent measurement gap patterns for different frequency ranges as specified in Table 5.1-1 in [18, 19, 20], in order for the requirements in the following clauses to apply the network must provide at most [N] per-UE measurement gap pattern for concurrent monitoring of all frequency layers

During the per-UE measurement gaps the UE:

- is not required to conduct reception/transmission from/to the PCell except the reception of signals used for RRM measurement(s) and the signals used for random access procedure according to [7].

UEs shall support the measurement gap patterns listed in Table 9.1C.2-1. UE determines measurement gap timing based on gap offset configuration and measurement gap timing advance configuration provided by higher layer signalling as specified in TS 38.331 [2] and TS 36.331 [16].

Table 9.1C.2-1: Gap Pattern Configurations

Gap Pattern Id	Measurement Gap Length (MGL, ms)	Measurement Gap Repetition Period (MGRP, ms)
0	6	40
1	6	80
2	3	40
3	3	80
4	6	20
5	6	160
6	4	20
7	4	40
8	4	80
9	4	160
10	3	20
11	3	160

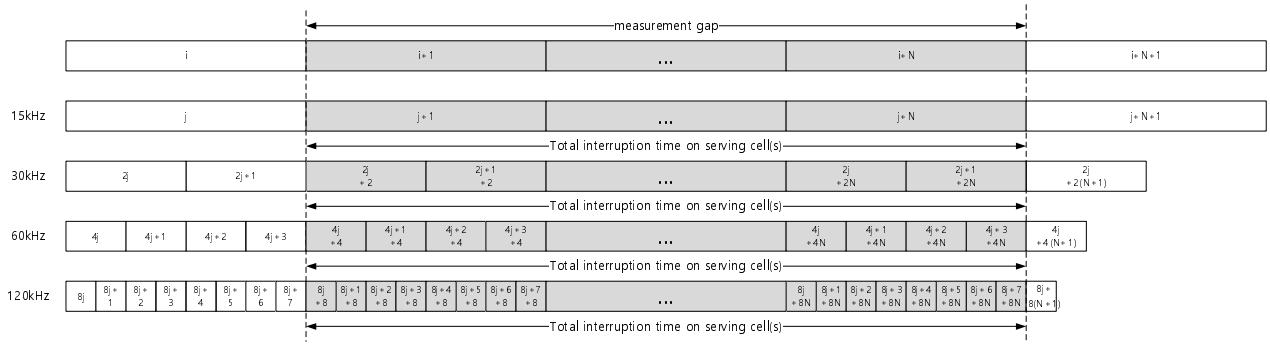

(a) Measurement gap with MGL = N(ms) with MG timing advance of 0ms for NR standalone operation configured with only single carrier

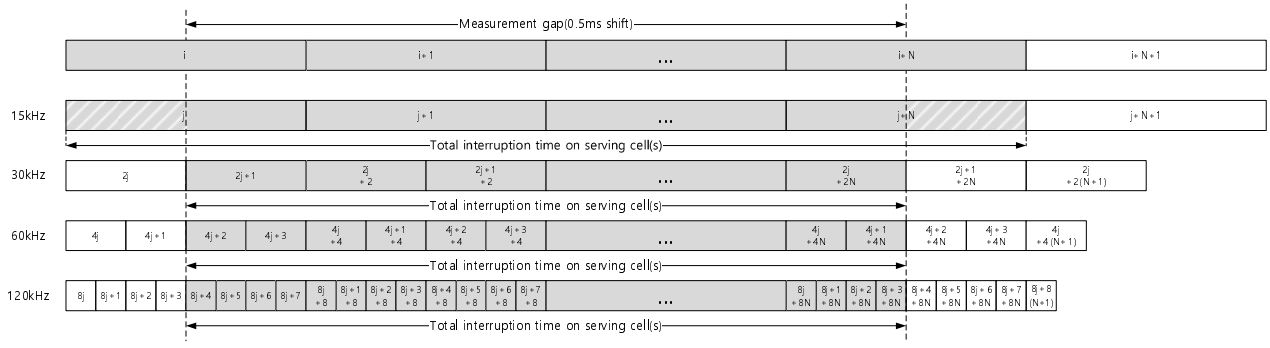

(b) Measurement gap with MGL = N(ms) with MG timing advance of 0.5ms for NR standalone operation configured with only single carrier

Figure 9.1C.2-1: Measurement GAP and total interruption time for NR standalone operation confgigured with only single carrier

The corresponding total number of interrupted slots on PCell is listed in Table 9.1C.2-2 for NR standalone configured with only single carrier.

Table 9.1C.2-2: Total number of interrupted slots on PCell in NR standalone operation configured with only single carrier

NR SCS (kHz)	Total number of interrupted slots on serving cells									
	When MG timing advance of 0ms is applied					When MG timing advance of 0.5ms is applied				
	MGL=20 ms	MGL=10 ms	MGL=6 ms	MGL=4 ms	MGL=3 ms	MGL=20 ms	MGL=10 ms	MGL=6 ms	MGL=4 ms	MGL=3 ms

15	20	10	6	4	3	21[Note3]	11[Note3]	7[Note3]	5[Note3]	4[Note3]
30	40	20	12	8	6	40	20	12	8	6
60	80	40	24	16	12	80	40	24	16	12
NOTE 1: For Gap Pattern ID 0, 1, 2 and 3, total number of interrupted subframes on MCG is MGL subframes when MG timing advance of 0ms is applied, and (MGL+1) subframes when MG timing advance of 0.5ms is applied. NOTE 2: Non-overlapped half-slots occur before and after the measurement gap. Whether a UE can receive and/or transmit in those half-slots is up to UE implementation.										

It is up to UE implementation whether or not the UE is able to conduct transmission in the following slot(s),

- when MGTA is not applied, in the L consecutive UL slots with respect to the SCS of the UL carrier with the same slot indices as the DL slots occurring immediately after measurement gap
- when MGTA is applied and the SCS of the UL carrier is other than 15kHz, in the L consecutive UL slots with respect to the SCS of the UL carrier with the same slot indices as the DL slots occurring immediately after measurement gap
- when MGTA is applied and the SCS of the UL carrier is 15kHz, in the L consecutive UL slots with respect to the SCS of the UL carrier with the same slot indices as the DL slots occurring immediately after the slot partially overlapped with measurement gap

where UL slot denotes that all the symbols in the slot are uplink symbols, and L=1 if $(N_{TA} + N_{TA\ offset}) \times T_c$ for the UL transmission is less than the length of one slot; L=2 otherwise.

Note: Network is supposed to take into account the possible difference between the estimated TA at network and actual TA at UE when scheduling UE in the above slot(s).

9.1C.8 Concurrent measurement gaps for SAN

9.1C.8.1 Introduction

When UE supports concurrent measurement gap pattern capability, network can provide multiple measurement gaps configured by RRC message(s) as specified in TS 38.331 [2].

9.1C.8.2 Requirements

If the UE requires measurement gaps to identify and measure intra-frequency cells and/or inter-frequency cells, and the UE supports concurrent measurement gap patterns (*parallelMeasurementGap*), in order for the requirements in the following clauses to apply the network can provide at most two per-UE measurement gap patterns for monitoring of all frequency layers.

For UE configured with the SA operation, when monitoring of multiple inter-frequency NR carrier frequency layers as configured by PCell using gaps, each monitored carrier frequency layer, including following measurement types:

- a measurement object with SSB based measurement,

can be associated to one or two measurement gap pattern provided the network configures the concurrent measurement gap patterns.

When UE supports concurrent measurement gap patterns, each measurement gap pattern supported by the UE is listed in Table 9.1.2-1 based on the applicability specified in table 9.1.2-3.

The requirements in clause 9.1.2 are also applicable for the UE capable of and configured with multiple concurrent measurement gap patterns within each measurement gap pattern.

9.1C.8.3 Collision between concurrent measurement gaps

Collisions between occasions of two concurrent measurement gaps may occur as specified in this clause if the two measurement gaps are

- two per-UE measurement gaps, or

When UE is configured with concurrent measurement gaps, two measurement gap occasions are considered colliding if at least one of the following conditions is met:

- the two occasions are fully or partially overlapping in time domain, or
- the distance between the two occasions is [equal to or] smaller than 4ms.

The distance between two measurement gap occasions is defined as the time difference between the ending point of the first occasion and the starting point of the second occasion, where the first measurement gap occasion occurs earlier in time than the second measurement gap occasion.

If two colliding measurement gaps are not fully overlapping, in case of collision between two measurement gap occasions, the UE shall perform measurements in the occasion of the measurement gap with higher priority, and the occasion of the measurement gap with lower priority is considered to be dropped. The UE shall be able to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI in the corresponding NR serving cells in the slots that are not interrupted according to requirements in clause 9.1C.8.4.

If two colliding measurement gaps are fully overlapping with MGRP=160ms, in case of collision between two measurement gap occasions, the UE shall perform measurements in the occasion of one of the measurement gaps, and it is up to UE implementation which occasion is used for measurement, provided that UE can meet the requirements in clause 9.2C and 9.3C.

If two measurement gaps are fully overlapping with MGRP<160ms, no measurement requirements apply.

9.1C.8.4 Measurement gap related requirements of concurrent measurement gaps

A slot is considered as interrupted if it is interrupted by an occasion of any of the configured concurrent measurement gaps following the measurement gap interruption requirements in clause 9.1.2, except for a dropped measurement gap occasion.

9.1C.9 Collision between SMTC and measurement gap for SAN

9.1C.9.1 Introduction

This clause contains definition of collision between SMTCs and measurement gap for SAN.

9.1C.9.2 Collision between SMTCs and measurement gap

Collision between occasions of SMTC and measurement gap may occur as specified in this clause.

When UE is configured with one or more than one measurement gap pattern, an SMTC occasion outside measurement gap and a measurement gap occasion are considered colliding if at least one of the following conditions is met:

- the SMTC occasion is fully or partially overlapping in time domain with the measurement gap occasion, or
- the magnitude of the distance between the SMTC occasion and the measurement gap occasion in time domain is less than or equals to 4ms.

The distance between a SMTC occasion and a measurement gap occasion is defined as:

- the time difference between the ending point of the SMTC occasion and the starting point of the measurement gap occasion, where the SMTC occasion occurs earlier in time than the MG occasion, or

- the time difference between the ending point of the measurement gap occasion and the starting point of the SMTC occasion, where the measurement gap occasion occurs earlier in time than the SMTC occasion.

9.1C.9.3 Collision between multiple SMTCs on a SAN carrier

Collision between occasions of multiple SMTCs may occur as specified in this clause.

When UE is configured with more than one SMTC on a SAN carrier, two SMTC occasions outside measurement gap are considered colliding if at least one of the following conditions is met:

- the two SMTC occasions are fully or partially overlapping in time domain, or
- the magnitude of the distance between two SMTC occasions in time domain is less than or equals to 4 ms.

The distance between two SMTC occasions is defined as the time difference between the ending point of the earlier SMTC occasion and the starting point of the later SMTC ocasssion.

9.2 NR intra-frequency measurements

9.2.1 Introduction

A measurement is defined as a SSB based intra-frequency measurement provided the centre frequency of the SSB of the serving cell indicated for measurement and the centre frequency of the SSB of the neighbour cell are the same, and the subcarrier spacing of the two SSBs are also the same.

The UE shall be able to identify new intra-frequency cells and perform SS-RSRP, SS-RSRQ, and SS-SINR measurements of identified intra-frequency cells if carrier frequency information is provided by PCell or the PSCell, even if no explicit neighbour list with physical layer cell identities is provided.

The UE can perform intra-frequency SSB based measurements without measurement gaps (either legacy measurement gap or NCSG) if

- the UE indicates ‘no-gap’ via *intraFreq-needForGap* for intra-frequency measurement, or
- the SSB is completely contained in the active BWP of the UE, or
- the active downlink BWP is initial BWP[3].

For UE supporting *nr-NeedForGapNCSG-reporting-r17* and indicating *NeedForGapNCSG-InfoNR* for intra-frequency measurement,

- An intra-frequency SSB measurement is defined as measurement without gap if
  - the UE indicates ‘nogap-noncsg’ via *NeedForGapNCSG-InfoNR* for the intra-frequency measurement, and
  - the SSB is not completely contained in the active BWP of the UE, and
  - the active downlink BWP is not an initial BWP [3]

  The delay requirements are specified in clause 9.2.5

  An intra-frequency SSB measurement is defined as measurement with NCSG if
  - the UE indicates ‘ncsg’ via *NeedForGapNCSG-InfoNR* for the intra-frequency measurement, and
  - the SSB is not completely contained in the active BWP of the UE, and
  - the active downlink BWP is not an initial BWP [3]

  When network configures NCSG, the delay requirements are specified in clause 9.2.7

When network configures measurement gap, the delay requirements are specified in clause 9.2.6

- An intra-frequency SSB measurement is defined as measurement with gap if
  - the UE indicates 'gap' via *NeedForGapNCSG-InfoNR* for the intra-frequency measurement, and
  - the SSB is not completely contained in the active BWP of the UE, and
  - the active downlink BWP is not an initial BWP [3]

  When network configures measurement gap, the delay requirements are specified in clause 9.2.6
- The UE can perform intra-frequency SSB based measurement corresponding to a deactivated SCell or dormant SCell with NCSG.
- For intra-frequency SSB based measurements with NCSG, UE may cause scheduling restriction as specified in clause 9.2.7.3.

For intra-frequency SSB based measurements without measurement gaps, UE may cause scheduling restriction as specified in clause 9.2.5.3.SSB based measurements are configured along with one or two measurement timing configuration(s) (SMTC(s)) which provides periodicity, duration and offset information on a window of up to 5ms where the measurements are to be performed. For intra-frequency connected mode measurements, up to two measurement window periodicities may be configured. A single measurement window offset and measurement duration are configured per intra-frequency measurement object.

When measurement gaps are needed, the UE is not expected to detect SSB and measure RSSI of RSRQ which start earlier than the gap starting time + switching time, nor detect SSB and measure RSSI of RSRQ which end later than the gap end – switching time. Switching time is 0.5ms for frequency range FR1 and 0.25ms for frequency range FR2.

The requirements in this clause shall also apply, when the UE is configured to perform SRS carrier based switching and using measurement gaps.

The measurement requirements defined for an activated SCell with a non-dormant active BWP defined in this clause shall also apply to an activated SCell with dormant BWP as active BWP.

9.2.2 Requirements applicability

The requirements in clause 9.2 apply, provided:

- The cell being identified or measured is detectable.

An intra-frequency cell shall be considered detectable when for each relevant SSB:

- SS-RSRP related side conditions given in clauses 10.1.2 and 10.1.3 for FR1 and FR2, respectively, for a corresponding Band,
- SS-RSRQ related side conditions given in clauses 10.1.7 and 10.1.8 for FR1 and FR2, respectively, for a corresponding Band,
- SS-SINR related side conditions given in clauses 10.1.12 and 10.1.13 for FR1 and FR2, respectively, for a corresponding Band,
- SSB_RP and SSB Ês/Iot according to Annex B.2.2 for a corresponding Band.

9.2.3 Number of cells and number of SSB

9.2.3.1 Requirements for FR1

For each intra-frequency layer, during each layer 1 measurement period, the UE shall be capable of performing SS-RSRP, SS-RSRQ, and SS-SINR measurements for at least:

- 8 identified cells, and

- 14 SSBs with different SSB index and/or PCI on the intra-frequency layer, where the number of SSBs in the serving cell (except for the SCell) is not smaller than the number of configured RLM-RS SSB resources.

9.2.3.2 Requirements for FR2

For one single intra-frequency layer in a band, during each layer 1 measurement period, the UE shall be capable of performing SS-RSRP, SS-RSRQ, and SS-SINR measurements for at least:

- 6 identified cells, and
- 24 SSBs with different SSB index and/or PCI,

where this single intra-frequency layer shall be:

- PCC when UE is configured with SA NR operation mode with PCC in the band; or
- PSCC when UE is configured with EN-DC with PSCC in the band; or
- PSCC when UE is configured with NR-DC with PSCC in the band; or
- One of the SCCs on which UE is configured to report SSB based measurements when neither PCC nor PSCC is in the same band, so that the selected SCC shall be an SCC where the UE is configured with SS-RSRP measurement reporting if such SCC exists, otherwise the selected SCC is determined by UE implementation.

The UE shall also be capable of performing SS-RSRP, SS-RSRQ, and SS-SINR measurements for at least 2 SSBs on serving cell for each of the other intra-frequency layer(s) in the same band.

9.2.4 Measurement Reporting Requirements

9.2.4.1 Periodic Reporting

Reported RSRP, RSRQ, and RS-SINR measurements contained in periodic measurement reports shall meet the requirements in clauses 10.1.2.1 (RSRP for FR1), 10.1.3.1 (RSRP for FR2), 10.1.7.1 (RSRQ for FR1), 10.1.8.1 (RSRQ for FR2), 10.1.12.1 (RS-SINR for FR1) and 10.1.13.1 (RS-SINR for FR2).

9.2.4.2 Event-triggered Periodic Reporting

Reported RSRP, RSRQ, and RS-SINR measurements contained in event-triggered periodic measurement reports shall meet the requirements in clauses 10.1.2.1 (RSRP for FR1), 10.1.3.1 (RSRP for FR2), 10.1.7.1 (RSRQ for FR1), 10.1.8.1 (RSRQ for FR2), 10.1.12.1 (RS-SINR for FR1) and 10.1.13.1 (RS-SINR for FR2).

The first report in event triggered periodic measurement reporting shall meet the requirements specified in clause 9.2.4.3.

9.2.4.3 Event Triggered Reporting

Reported RSRP, RSRQ, and RS-SINR measurements contained in event triggered measurement reports shall meet the requirements in clauses 10.1.2.1 (RSRP for FR1), 10.1.3.1 (RSRP for FR2), 10.1.7.1 (RSRQ for FR1), 10.1.8.1 (RSRQ for FR2), 10.1.12.1 (RS-SINR for FR1) and 10.1.13.1 (RS-SINR for FR2).

The UE shall not send any event triggered measurement reports as long as no reporting criteria is fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: 2 x TTI_{DCCH}. This measurement reporting delay excludes a delay which caused by no UL resources being available for UE to send the measurement report on.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{identify\ intra\ with\ index}$ or $T_{identify\ intra\ without\ index}$ defined in clause 9.2.5.1 or clause 9.2.6.2. When L3 filtering is used an additional delay can be expected. In EN-DC and NE-DC operation, when the UE is configured to perform E-UTRA SRS carrier-based

switching an additional delay can be expected in FR1 if the UE is capable of per-FR gap, or an additional delay can be expected in both FR1 and FR2 if the UE is not capable of per-FR gap.

A cell is detectable only if at least one SSBs measured from the Cell being configured remains detectable during the time period $T_{identify_intra_without_index}$ or $T_{identify_intra_with_index}$ as defined in clause 9.2.5.1 or clause 9.2.6.2. If a cell which has been detectable at least for the time period $T_{identify\ intra\ without\ index}$ or $T_{identify\ intra\ with\ index}$ defined in clause 9.2.5.1 or clause 9.2.6.2 becomes undetectable for a period ≤ 5 seconds and then the cell becomes detectable again with the same spatial reception parameter and triggers an event, the event triggered measurement reporting delay shall be less than $T_{SSB_measurement_period_intra}$ provided the timing to that cell has not changed more than $\pm 3200/2^{\mu} T_c$ while the measurement gap has not been available and L3 filtering has not been used, where μ is the SCS configuration as defined in clause 4.2 of TS 38.211 [3]. When L3 filtering is used, an additional delay can be expected. In EN-DC and NE-DC operation, when the UE is configured to perform E-UTRA SRS carrier-based switching an additional delay can be expected in FR1 if the UE is capable of per-FR gap, or an additional delay can be expected in both FR1 and FR2 if the UE is not capable of per-FR gap.

9.2.5 Intrafrequency measurements without measurement gaps

9.2.5.1 Intrafrequency cell identification

The UE shall be able to identify a new detectable intra-frequency cell within $T_{identify_intra_without_index}$ if the UE is not indicated to report SSB based RRM measurement result with the associated SSB index(*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured), or the UE is indicated that the neighbour cell is synchronous with the serving cell (*deriveSSB-IndexFromCell* is enabled). Otherwise UE shall be able to identify a new detectable intra frequency cell within $T_{identify_intra_with_index}$. The UE shall be able to identify a new detectable intra frequency SS block of an already detected cell within $T_{identify_intra_without_index.}$ It is assumed that *deriveSSB-IndexFromCell* is always enabled for FR1 TDD and FR2 with SCS smaller or equal to 480 kHz.

$$T_{identify_intra_without_index} = (T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra}) \text{ ms}$$

$$T_{identify_intra_with_index} = (T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra} + T_{SSB_time_index_intra}) \text{ ms}$$

Where:

T_{PSS/SSS_sync_intra}: it is the time period used in PSS/SSS detection given in table 9.2.5.1-1, 9.2.5.1-2, 9.2.5.1-4 (deactivated SCell) or 9.2.5.1-5 (deactivated SCell) or 9.2.5.1-9 (deactivated SCell) or 9.2.5.1-11 or 9.2.5.1-12 (deactivated PSCell) or 9.2.5.1-13 (deactivated PSCell).

- For UE supporting power class 6 with *highSpeedMeasFlagFR2-r17* configured, if SMTC <= 40ms, T_{PSS/SSS_sync_intra} is given in Table 9.2.5.1-11; otherwise, T_{PSS/SSS_sync_intra} is given in Table 9.2.5.1-2.

$T_{SSB_time_index_intra}$: it is the time period used to acquire the index of the SSB being measured given in table 9.2.5.1-3, 9.2.5.1-15 (FR2-2), 9.2.5.1-6 (deactivated SCell), 9.2.5.1-10(deactivated SCell) or 9.2.5.1-14 (deactivated PSCell).

$T_{SSB_measurement_period_intra}$: equal to a measurement period of SSB based measurement given in table 9.2.5.2-1, table 9.2.5.2-2 table 9.2.5.2-3 (deactivated SCell), 9.2.5.2-4(deactivated SCell), 9.2.5.2-5 or 9.2.5.2-6(deactivated SCell), 9.2.5.2-8(deactivated PSCell) or 9.2.5.2-9(deactivated PSCell).

- For UE supporting power class 6 with *highSpeedMeasFlagFR2-r17* configured, if SMTC <= 40ms, $T_{SSB_measurement_period_intra}$ is given in Table 9.2.5.2-7; otherwise, $T_{SSB_measurement_period_intra}$ is given in Table 9.2.5.2-2.

$CSSF_{intra}$: it is a carrier specific scaling factor and is determined

according to $CSSF_{outside_gap,i}$ in clause 9.1.5.1 for measurement conducted outside measurement gaps, i.e. when intra-frequency SMTC is fully non overlapping or partially overlapping with measurement gaps or NCSG, or according to $CSSF_{within_gap,i}$ in clause 9.1.5.2 for measurement conducted within measurement gaps, i.e. when intra-frequency SMTC is fully overlapping with measurement gaps, or according to $CSSF_{within_ncsg,i}$ in clause

9.1.5.3 for measurement conducted within NCSG, i.e. when intra-frequency SMTC is fully overlapping with NCSG.

For a UE that supports Pre-MG, an SMTC occasion is only considered to be overlapped by Pre-MG if the Pre-MG is activated.

if the high layer in TS 38.331 [2] signalling of *smtc2* is configured, the assumed periodicity of intra-frequency SMTC occasions corresponds to the value of higher layer parameter *smtc2*; Otherwise the assumed periodicity of intra-frequency SMTC occasions corresponds to the value of higher layer parameter *smtc1*.

$M_{pss/sss_sync_w/o_gaps}$: For a UE supporting FR2-1 power class 1 or 5, $M_{pss/sss_sync_w/o_gaps}$ =40. For a UE supporting power class 2, $M_{pss/sss_sync_w/o_gaps}$ =24. For a UE supporting FR2-1 power class 3, $M_{pss/sss_sync_w/o_gaps}$ =24. For a UE supporting FR2-1 power class 4, $M_{pss/sss_sync_w/o_gaps}$ =24. For a UE supporting FR2-2 power class 1, $M_{pss/sss_sync_w/o_gaps}$ = 60. For a UE supporting FR2-2 power class 2, $M_{pss/sss_sync_w/o_gaps}$ = 36. For a UE supporting FR2-2 power class 3, $M_{pss/sss_sync_w/o_gaps}$ = 36.

$M_{meas_period_w/o_gaps}$: For a UE supporting FR2-1 power class 1 or 5, $M_{meas_period_w/o_gaps}$ =40. For a UE supporting FR2-1 power class 2, $M_{meas_period_w/o_gaps}$ =24. For a UE supporting FR2-1 power class 3, $M_{meas_period_w/o_gaps}$ =24. For a UE supporting power class 4, $M_{meas_period_w/o_gaps}$ =24. For a UE supporting FR2-2 power class 1, $M_{meas_period_w/o_gaps}$ = 60. For a UE supporting FR2-2 power class 2, $M_{meas_period_w/o_gaps}$ = 36. For a UE supporting FR2-2 power class 3, $M_{meas_period_w/o_gaps}$ = 36.

$M_{SSB_index_intra}$: For a UE supporting FR2-2 power class 1, $M_{SSB_index_intra}$ = 72 samples. For a UE supporting FR2-2 power class 2, $M_{SSB_index_intra}$ = 48 samples. For a UE supporting FR2 power class 3, $M_{SSB_index_intra}$ = 48 samples.

When UE supports *concurrentMeasGap-r17* and is configured with concurrent measurement gaps,

K_p is the scaling factor for an SSB frequency layer to be measured without measurement gaps. $K_p = N_{total} / N_{available}$, where $N_{available}$ and N_{total} are calculated as follows:

- For a window W of duration max(SMTC period, MGRP_max), where MGRP max is the maximum MGRP across all configured per-UE measurement gap and/or per-FR measurement gap within the same FR as the SSB frequency layer, and starting from the beginning of any SMTC occasion:
  - N_{total} is the total number of SMTC occasions within the window, including those overlapped with measurement gap occasions within the window, and
  - $N_{available}$ is the number of SMTC occasions that are not overlapped with any non-dropped MG occasion within the window W, after accounting for measurement gap collisions by applying the measurement gap collision rule in section 9.1.8.3.

    $K_p = 1$ when $N_{available} = 0$.
- Otherwise, when UE is not configured with or UE does not support concurrent measurement gaps:

  When intra-frequency SMTC is fully non overlapping with measurement gaps or NCSG, or intra-frequency SMTC is fully overlapping with MGs or NCSG, Kp=1

  When intra-frequency SMTC is partially overlapping with measurement gaps, Kp = 1/(1- (SMTC period /MGRP)), where SMTC period < MGRP. When intra-frequency SMTC is partially overlapping with NCSG, Kp = 1/(1- (SMTC period /VIRP)), where SMTC period < VIRP. For calculation of Kp, if the high layer signalling (TS 38.331 [2]) of *smtc2* is configured, for cells indicated in the *pci-List* parameter in *smtc2*, the SMTC periodicity corresponds to the value of higher layer parameter *smtc2*; for the other cells, the SMTC periodicity corresponds to the value of higher layer parameter *smtc1*. If the higher layer signaling in TS38.331 [2] signalling of *smtc2* is present and smtc1 is fully overlapping with measurement gaps and smtc2 is partially overlapping with measurement gaps, requirements are not specified for $T_{identify_intra_without_index}$ or $T_{identify_intra_with_index}$

  For FR2,

  $K_{layer1_measurement}$=1,

- if all of the reference signals configured for RLM, BFD, CBD or L1-RSRP for beam reporting on any FR2 serving frequency in the same band outside measurement gap are not fully overlapped by intra-frequency SMTC occasions, or

- if all of the reference signal configured for RLM, BFD, CBD or L1-RSRP for beam reporting on any FR2 serving frequency in the same band outside measurement gap and fully-overlapped by intra-frequency SMTC occasions are not overlapped with any of the SSB symbols and the RSSI symbols, and 1 symbol before each consecutive SSB symbols and the RSSI symbols, and 1 symbol after each consecutive SSB symbols and the RSSI symbols, given that *SSB-ToMeasure* and *SS-RSSI-Measurement* are configured, where SSB symbols are indicated by the union set of SSB-ToMeasure from all the configured measurement objects on the same serving carrier which can be merged. and RSSI symbols are indicated by *SS-RSSI-Measurement*;

  $K_{layer1_measurement}$=1.5, otherwise.

If the above-mentioned reference signal configured for L1-RSRP measurement is aperiodic CSI-RS resource, longer cell identification delay would be expected.

If MCG DRX is in use, cell identification requirements for intra-frequency measurement in MCG specified in Table 9.2.5.1-1, Table 9.2.5.1-2, Table 9.2.5.1-3, Table 9.2.5.1-4, Table 9.2.5.1-5 and Table 9.2.5.1-6 shall depend on the MCG DRX cycle. If SCG DRX is in use, cell identification requirements for intra-frequency measurement in SCG specified in Table 9.2.5.1-1, Table 9.2.5.1-2, Table 9.2.5.1-3, Table 9.2.5.1-4, Table 9.2.5.1-5, Table 9.2.5.1-6, Table 9.2.5.1-12, Table 9.2.5.1-13 and Table 9.2.5.1-14 shall depend on the SCG DRX cycle. Otherwise, the requirements for when DRX is not in use shall apply.

Table 9.2.5.1-1: Time period for PSS/SSS detection, (Frequency range FR1)

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	max(600ms, ceil(5 x K_p) x SMTC period)[Note 1] x $CSSF_{intra}$
DRX cycle≤ 320ms	max(600ms, ceil(M2 [Note 2]x 5 x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	ceil(5 x K_p) x DRX cycle x $CSSF_{intra}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	
NOTE 2: When *highSpeedMeasFlag-r16* is not configured, M2 = 1.5; When *highSpeedMeasFlag-r16* is configured, M2 = 1.5 if SMTC periodicity > 40 ms;,otherwise M2=1.	
NOTE 3: When *highSpeedMeasFlag-r16* is configured, the requirements apply only to UE supporting either *measurementEnhancement-r16* or *intraNR-MeasurementEnhancement-r16* on measurements of the primary component carrier and do not apply to measurements of a secondary component carrier with active SCell.	
NOTE 4: When *highSpeedMeasCA-Scell-r17* is configured and UE supports *measurementEnhancementCA-r17*, M2 = 1.5 if SMTC periodicity > 40 ms; otherwise M2=1.	

Table 9.2.5.1-2: Time period for PSS/SSS detection, (Frequency range FR2)

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	max(600ms, ceil($M_{pss/sss_sync_w/o_gaps}$ x K_{FR} x K_p x $K_{layer1_measurement}$) x SMTC period)[Note 1] x $CSSF_{intra}$
DRX cycle≤ 320ms	max(600ms, ceil(1.5 x $M_{pss/sss_sync_w/o_gaps}$ x K_{FR} x K_p x $K_{layer1_measurement}$) x max(SMTC period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	ceil($M_{pss/sss_sync_w/o_gaps}$ x K_{FR} x K_p x $K_{layer1_measurement}$) x DRX cycle x $CSSF_{intra}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	
NOTE 2: K_{FR} is a scaling factor depending on the frequency range and the SSB SCS. For FR2-1, KFR = 1. For FR2-2: KFR = 1 if the SCS of the SSB of the cell being detected is 120 kHz, KFR = 2 if the SCS of the SSB of the cell being detected is 480 kHz, and KFR = 3 if the SCS of the SSB of the cell being detected is 960 kHz.	

Table 9.2.5.1-3: Time period for time index detection (FR1)

DRX cycle	$T_{SSB_time_index_intra}$
No DRX	max(120ms, ceil(3 x K_p) x SMTC period)[Note 1] x $CSSF_{intra}$
DRX cycle≤ 320ms	max(120ms, ceil (M2 [Note 2] x 3 x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	Ceil(3 x K_p) x DRX cycle x $CSSF_{intra}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified NOTE 2: When *highSpeedMeasFlag-r16* is not configured, M2 = 1.5; When *highSpeedMeasFlag-r16* is configured, M2 = 1.5 if SMTC periodicity > 40 ms;,otherwise M2=1 NOTE 3: When *highSpeedMeasFlag-r16* is configured, the requirements apply only to UE supporting either *measurementEnhancement-r16* or *intraNR-MeasurementEnhancement-r16* on measurements of the primary component carrier and do not apply to measurements of a secondary component carrier with active SCell. NOTE 4: When *highSpeedMeasCA-Scell-r17* is configured and UE supports *measurementEnhancementCA-r17*, M2 = 1.5 if SMTC periodicity > 40 ms; otherwise M2=1	

Table 9.2.5.1-4: Time period for PSS/SSS detection, deactivated SCell (FR1)

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	Ceil(5 x K_p) x measCycleSCell x $CSSF_{intra}$
DRX cycle≤ 320ms	Ceil(5 x K_p) x max(measCycleSCell, 1.5xDRX cycle) x $CSSF_{intra}$
DRX cycle> 320ms	Ceil(5 x K_p) x max(measCycleSCell, DRX cycle) x $CSSF_{intra}$
NOTE 1: The requirements also apply to deactivated SCG SCell.	

Table 9.2.5.1-5: Time period for PSS/SSS detection, deactivated SCell (FR2)

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	Ceil($M_{pss/sss_sync_w/o_gaps}$ x K_p) x measCycleSCell x $CSSF_{intra}$
DRX cycle≤ 320ms	Ceil($M_{pss/sss_sync_w/o_gaps}$ x K_p) x max(measCycleSCell, 1.5xDRX cycle) x $CSSF_{intra}$
DRX cycle> 320ms	Ceil($M_{pss/sss_sync_w/o_gaps}$ x K_p) x max(measCycleSCell, DRX cycle) x $CSSF_{intra}$
NOTE 1: The requirements also apply to deactivated SCG SCell.	

Table 9.2.5.1-6: Time period for time index detection, deactivated SCell (FR1)

DRX cycle	$T_{SSB_time_index_intra}$
No DRX	Ceil(3 x K_p) x measCycleSCell x $CSSF_{intra}$
DRX cycle≤ 320ms	Ceil(3 x K_p) x max(measCycleSCell, 1.5xDRX cycle) x $CSSF_{intra}$
DRX cycle> 320ms	Ceil(3 x K_p) x max(measCycleSCell, DRX cycle) x $CSSF_{intra}$
NOTE 1: The requirements also apply to deactivated SCG SCell.	

Table 9.2.5.1-7: Void

Table 9.2.5.1-8: Void

Table 9.2.5.1-9: Time period for PSS/SSS detection, deactivated SCell (FR1), when *highSpeedMeasCA-Scell-r17* is configured

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	Ceil(5 x K_p) x measCycleSCell x $CSSF_{intra}$
DRX cycle≤ 320ms	Ceil(5 x K_p) x max(measCycleSCell, M2 [Note 1]xDRX cycle) x $CSSF_{intra}$

DRX cycle> 320ms	Ceil(5 x K_p) x max(measCycleSCell, DRX cycle) x $CSSF_{intra}$
NOTE 1: M2 = 1.5 if SMTC periodicity > 40 ms; otherwise M2=1	

Table 9.2.5.1-10: Time period for time index detection, deactivated SCell (FR1)，when *highSpeedMeasCA-Scell-r17* is configured

DRX cycle	$T_{SSB_time_index_intra}$
No DRX	Ceil(3 x K_p) x measCycleSCell x $CSSF_{intra}$
DRX cycle≤ 320ms	Ceil(3 x K_p) x max(measCycleSCell, M2 [Note 1]xDRX cycle) x $CSSF_{intra}$
DRX cycle> 320ms	Ceil(3 x K_p)x max(measCycleSCell, DRX cycle) x $CSSF_{intra}$
NOTE 1: M2 = 1.5 if SMTC periodicity > 40 ms; otherwise M2=1	

Table 9.2.5.1-11: Time period for PSS/SSS detection when *highSpeedMeasFlagFR2-r17* is configured, (Frequency range FR2) when SMTC period <= 40ms

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	max(600ms, ceil(M1[Note 2] x K_p x $K_{layer1_measurement}$) x SMTC period)[Note 1] x $CSSF_{intra}$
DRX cycle≤ 80ms	max(600ms, ceil(M1[Note 2] x K_p x $K_{layer1_measurement}$) x max(SMTC period,DRX cycle)) x $CSSF_{intra}$
80ms< DRX cycle≤ 320ms	ceil(1.5 x $M_{pss/sss_sync_w/o_gaps}$ [Note 3] x K_p x $K_{layer1_measurement}$) x max(SMTC period,DRX cycle) x $CSSF_{intra}$
DRX cycle>320ms	ceil($M_{pss/sss_sync_w/o_gaps}$ [Note 3] x K_p x $K_{layer1_measurement}$) x DRX cycle x $CSSF_{intra}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified NOTE 2: For UE supporting power class 6, M1 = 6 if *highSpeedMeasFlagFR2-r17* = set1 or M1 = 18 if *highSpeedMeasFlagFR2-r17* = set2 NOTE 3: Void	

Table 9.2.5.1-12: Time period for PSS/SSS detection, deactivated PSCell (FR1)

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	Ceil(5 x K_p) x measCyclePSCell x $CSSF_{intra}$
DRX cycle≤ 320ms	Ceil(5 x K_p) x max(measCyclePSCell, 1.5xDRX cycle) x $CSSF_{intra}$
DRX cycle> 320ms	Ceil(5 x K_p) x max(measCyclePSCell, DRX cycle) x $CSSF_{intra}$

Table 9.2.5.1-13: Time period for PSS/SSS detection, deactivated PSCell (FR2)

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	Ceil($M_{pss/sss_sync_w/o_gaps}$ x K_p) x measCyclePSCell x $CSSF_{intra}$
DRX cycle≤ 320ms	Ceil($M_{pss/sss_sync_w/o_gaps}$ x K_p) x max(measCyclePSCell, 1.5xDRX cycle) x $CSSF_{intra}$
DRX cycle> 320ms	Ceil($M_{pss/sss_sync_w/o_gaps}$ x K_p) x max(measCyclePSCell, DRX cycle) x $CSSF_{intra}$

Table 9.2.5.1-14: Time period for time index detection, deactivated PSCell (FR1)

DRX cycle	$T_{SSB_time_index_intra}$
No DRX	Ceil(3 x K_p) x measCyclePSCell x $CSSF_{intra}$
DRX cycle≤ 320ms	Ceil(3 x K_p) x max(measCyclePSCell, 1.5xDRX cycle) x $CSSF_{intra}$

DRX cycle> 320ms	Ceil(3 x K_p) x max(measCyclePSCell, DRX cycle) x $CSSF_{intra}$

Table 9.2.5.1-15: Time period for time index detection (Frequency range FR2-2)

DRX cycle	$T_{SSB_time_index_intra}$
No DRX	max(200ms, ceil($M_{SSB_index_intra}$ x K_p x SMTC period) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(200ms, ceil(1.5 x $M_{SSB_index_intra}$ x K_p) x max(SMTC period, DRX cycle) x $CSSF_{intra}$)
DRX cycle>320ms	Ceil($M_{SSB_index_intra}$ x K_p)x DRX cycle x $CSSF_{intra}$

9.2.5.2 Measurement period

The measurement period for intra-frequency measurements without gaps is as shown in table 9.2.5.2-1, 9.2.5.2-2, 9.2.5.2-3 (deactivated SCell), 9.2.5.2-4 (deactivated SCell), 9.2.5.2-8 (deactivated SCG applicable for PSCell) or 9.2.5.2-9 (deactivated SCG applicable for PSCell). When *highSpeedMeasFlag-r16* is configured, $T_{SSB_measurement_period_intra}$ is specified in Table 9.2.5.2-5.

If the higher layer signaling in TS38.331 [2] signalling of *smtc2* is present and smtc1 is fully overlapping with measurement gaps and smtc2 is partially overlapping with measurement gaps, requirements are not specified for $T_{SSB_measurement_period_intra}$

For a UE that supports Pre-MG, an SMTC occasion is only considered to be overlapped by Pre-MG if the Pre-MG is activated.

If MCG DRX is in use, measurement period requirements for intra-frequency measurement in MCG specified in Table 9.2.5.2-1, Table 9.2.5.2-2, Table 9.2.5.2-3 and Table 9.2.5.2-4 shall depend on the MCG DRX cycle. If SCG DRX is in use, measurement period requirements for intra-frequency measurement in SCG specified in Table 9.2.5.2-1, Table 9.2.5.2-2, Table 9.2.5.2-3, Table 9.2.5.2-4, Table 9.2.5.2-8 and Table 9.2.5.2-9, shall depend on the SCG DRX cycle. Otherwise, the requirements for when DRX is not in use shall apply.

For FR2, a longer measurement period is allowed, if aperiodic CSI-RS resource is measured for L1-RSRP measurement on any FR2 serving frequency in the same band, and the CSI-RS resource is outside measurement gap and overlapped with any of the SSB symbols and the RSSI symbols, and 1 symbol before each consecutive SSB symbols and the RSSI symbols, and 1 symbol after each consecutive SSB symbols and the RSSI symbols. If *SSB-ToMeasure* or *SS-RSSI-Measurement* is configured, the SSB symbols are indicated by the union set of *SSB-ToMeasure* from all the configured measurement objects on the same band which can be merged and the RSSI symbols are indicated by *SS-RSSI-Measurement*.

Table 9.2.5.2-1: Measurement period for intra-frequency measurements without gaps (FR1)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	max(200ms, ceil(5 x K_p) x SMTC period)[Note 1] x $CSSF_{intra}$
DRX cycle≤ 320ms	max(200ms, ceil(1.5x 5 x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	ceil(5 x K_p) x DRX cycle x $CSSF_{intra}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

Table 9.2.5.2-2: Measurement period for intra-frequency measurements without gaps (FR2)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	max(400ms, ceil($M_{meas_period_w/o_gaps}$ x K_p x $K_{layer1_measurement}$) x SMTC period)[Note 1] x $CSSF_{intra}$
DRX cycle≤ 320ms	max(400ms, ceil(1.5x $M_{meas_period_w/o_gaps}$ x K_p x $K_{layer1_measurement}$) x max(SMTC period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	ceil($M_{meas_period_w/o_gaps}$ xK_p x $K_{layer1_measurement}$) x DRX cycle x $CSSF_{intra}$

NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified

Table 9.2.5.2-3: Measurement period for intra-frequency measurements without gaps (deactivated SCell) (FR1)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	Ceil(5 x K_p) x measCycleSCell x $CSSF_{intra}$
DRX cycle≤ 320ms	Ceil(5 x K_p) x max(measCycleSCell, 1.5xDRX cycle) x $CSSF_{intra}$
DRX cycle> 320ms	Ceil(5 x K_p) x max(measCycleSCell, DRX cycle) x $CSSF_{intra}$
NOTE 1: The requirements also apply to deactivated SCG SCel	

Table 9.2.5.2-4: Measurement period for intra-frequency measurements without gaps (deactivated SCell) (FR2)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	Ceil($M_{meas_period_w/o_gaps}$ x K_p) x measCycleSCell x $CSSF_{intra}$
DRX cycle≤ 320ms	Ceil($M_{meas_period_w/o_gaps}$ x K_p) x max(measCycleSCell, 1.5xDRX cycle) x $CSSF_{intra}$
DRX cycle> 320ms	Ceil($M_{meas_period_w/o_gaps}$ x K_p) x max(measCycleSCell, DRX cycle) x $CSSF_{intra}$
NOTE 1: The requirements also apply to deactivated SCG SCell.	

Table 9.2.5.2-5: $T_{SSB_measurement_period_intra}$ When *highSpeedMeasFlag-r16* and/or highSpeedMeasCA-Scell-r17 is configured (Frequency range FR1

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX Note 2	max(200ms, ceil(5 x K_p) x SMTC period)Note 1 x $CSSF_{intra}$
DRX cycle≤ 160ms	max(200ms, ceil(5 x M2 Note 2 x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{intra}$
160ms < DRX cycle≤ 320ms	ceil(4 x M2 Note 2 x K_p) x DRX cycle x $CSSF_{intra}$
DRX cycle>320ms	ceil(Y Note 3 x K_p) x DRX cycle x $CSSF_{intra}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified NOTE 2: M2 = 1.5 if SMTC period > 40 ms, otherwise M2=1 NOTE 3: Y=3 when SMTC period <= 40ms, Y=5 when SMTC period > 40ms NOTE 4: When *highSpeedMeasFlag-r16* is configured, the requirements apply only to UE supporting either *measurementEnhancement-r16* or *intraNR-MeasurementEnhancement-r16* on measurements of the primary component carrier and do not apply to measurements of a secondary component carrier with active SCell. NOTE 5: When highSpeedMeasCA-Scell-r17 is configured, the requirements apply to measurements of secondary component carrier with active SCell.	

Table 9.2.5.2-6: Measurement period for intra-frequency measurements without gaps (deactivated SCell) (FR1), when highSpeedMeasCA-Scell-r17 is configured

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	ceil(5 x K_p) x measCycleSCell x $CSSF_{intra}$
DRX cycle≤ 160ms	ceil(5 x K_p) x max(measCycleSCell, M2 Note 1 x DRX cycle) x $CSSF_{intra}$
160ms < DRX cycle≤ 320ms	ceil(4 x K_p) x max(measCycleSCell, M2 Note 1 x DRX cycle)
DRX cycle>320ms	ceil(Y Note 2 x K_p) x max(measCycleSCell, DRX cycle) x $CSSF_{intra}$
NOTE 1: M2 = 1.5 if SMTC periodicity > 40 ms, otherwise M2=1 NOTE 2: Y=3 when SMTC <= 40ms, Y=5 when SMTC > 40ms	

Table 9.2.5.2-7: Measurement period for intra-frequency measurements without gaps when *highSpeedMeasFlagFR2-r17* is configured (FR2) when SMTC period <= 40ms

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	max(400ms, ceil($M1^{Note\ 2}$ x K_p x $K_{layer1_measurement}$) x SMTC period)$^{Note\ 1}$ x $CSSF_{intra}$
DRX cycle≤ 80ms	max(400ms, ceil($M1^{Note\ 2}$ x K_p x $K_{layer1_measurement}$) x max(SMTC period,DRX cycle)) x $CSSF_{intra}$
80ms< DRX cycle≤ 320ms	ceil(1.5 x $M_{meas_period_w/o_gaps}$ $^{Note\ 3}$ x K_p x $K_{layer1_measurement}$) x max(SMTC period,DRX cycle) x $CSSF_{intra}$
DRX cycle>320ms	ceil($M_{meas_period_w/o_gaps}$ $^{Note\ 3}$ xK_p x $K_{layer1_measurement}$) x DRX cycle x $CSSF_{intra}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified NOTE 2: For UE supporting power class 6, M1 = 6 if *highSpeedMeasFlagFR2-r17* = set1 or M1 = 18 if *highSpeedMeasFlagFR2-r17* = set2	

Table 9.2.5.2-8 Measurement period for intra-frequency measurements without gaps (deactivated SCG applicable for PSCell) (FR1)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	Ceil(5 x K_p) x measCyclePSCell x $CSSF_{intra}$
DRX cycle≤ 320ms	Ceil(5 x K_p) x max(measCyclePSCell, 1.5xDRX cycle) x $CSSF_{intra}$
DRX cycle> 320ms	Ceil(5 x K_p) x max(measCyclePSCell, DRX cycle) x $CSSF_{intra}$

Table 9.2.5.2-9: Measurement period for intra-frequency measurements without gaps (deactivated SCG applicable for PSCell) (FR2)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	Ceil($M_{meas_period_w/o_gaps}$ x K_p) x measCyclePSCell x $CSSF_{intra}$
DRX cycle≤ 320ms	Ceil($M_{meas_period_w/o_gaps}$ x K_p) x max(measCyclePSCell, 1.5xDRX cycle) x $CSSF_{intra}$
DRX cycle> 320ms	Ceil($M_{meas_period_w/o_gaps}$ x K_p) x max(measCyclePSCell, DRX cycle) x $CSSF_{intra}$

9.2.5.3 Scheduling availability of UE during intra-frequency measurements

UE shall be capable of measuring without measurement gaps when the SSB is completely contained in the active bandwidth part of the UE. When any of the conditions in the following clauses is met, there are restrictions on the scheduling availability; otherwise, there is no scheduling restriction. Note that the SSB symbols indicated by the union set of SSB-ToMeasure from all the configured measurement objects on the same serving carrier which can be merged [2], if it is configured; otherwise, all *L* SSB symbols within the SMTC window duration defined in clause 4.1 of TS 38.213 [3] are included.

For a UE that supports Pre-MG, the requirements in 9.2.5.3 also apply when a Pre-MG is deactivated.

For UE supporting concurrent measurement gaps, when concurrent gaps are configured, the requirements in 9.2.5.3 are also applied to the slots that are not interrupted according to requirements in clause 9.1.X2.3.

9.2.5.3.1 Scheduling availability of UE performing measurements in TDD bands on FR1

When the UE performs intra-frequency measurements in a TDD band, the following restrictions apply due to SS-RSRP or SS-SINR measurement

- The UE is not expected to transmit PUCCH/PUSCH/SRS on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to

be measured within SMTC window duration. If the high layer in TS 38.331 [2] signalling of *smtc2* is configured, the SMTC periodicity follows *smtc2*; Otherwise SMTC periodicity follows *smtc1*.

When the UE performs intra-frequency measurements in a TDD band, the following restrictions apply due to SS-RSRQ measurement

- The UE is not expected to transmit PUCCH/PUSCH/SRS on SSB symbols to be measured, RSSI measurement symbols, and on 1 data symbol before each consecutive SSB to be measured/RSSI symbols and 1 data symbol after each consecutive SSB to be measured/RSSI symbols within SMTC window duration. If the high layer signalling of *smtc2* is configured in TS 38.331 [2], the SMTC periodicity follows *smtc2*; Otherwise the SMTC periodicity follows *smtc1*.

When TDD intra-band carrier aggregation is performed, the scheduling restrictions due to a given serving cell should also apply to all other serving cells in the same band on the symbols that fully or partially overlap with the aforementioned restricted symbols.

When TDD inter-band carrier aggregation is performed, the scheduling restrictions due to a given serving cell should also apply to another serving cell in a different band on the symbols that fully or partially overlap with the aforementioned restricted symbols, if UE does not have the capability of supporting *simultaneousRxTxInterBandCA* for this band pair.

9.2.5.3.2 Scheduling availability of UE performing measurements with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UE which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to SS-RSRP/RSRQ/SINR measurement

- If *deriveSSB_IndexFromCell* is enabled the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration. If the high layer signalling of *smtc2* is configured(in TS 38.331 [2]), the SMTC periodicity follows *smtc2*; Otherwise the SMTC periodicity follows *smtc1*.

- If *deriveSSB_IndexFromCell* is not enabled the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on all symbols within SMTC window duration. If the high layer signalling of *smtc2* is configured in TS 38.331 [2], the SMTC periodicity follows *smtc2*; Otherwise the SMTC periodicity follows *smtc1*.

If the following conditions are met:

- The UE has been notified about system information update through paging,

- The gap between the UE's reception of PDCCH that UE monitors in the Type 2-PDCCH CSS set that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots

The UE is expected to receive the PDCCH that the UE monitors in the Type0-PDCCH CSS set, and/or the corresponding PDSCH, on SSB symbols to be measured.

When intra-band carrier aggregation is performed, the scheduling restrictions due to a given serving cell should also apply to all other serving cells in the same band on the symbols that fully or partially overlap with the aforementioned restricted symbols.

9.2.5.3.3 Scheduling availability of UE performing measurements on FR2

The following scheduling restriction applies due to SS-RSRP or SS-SINR measurement on an FR2 intra-frequency cell

- If *deriveSSB-IndexFromCell* is enabled the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on SSB symbols to be measured, and on K data symbol(s) before each consecutive SSB symbols to be measured and K data symbol(s) after each consecutive SSB symbols to be measured within SMTC window duration.

- If *deriveSSB-IndexFromCell* is not enabled and the SCS of data and SSB symbols are smaller than 960kHz, the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on all symbols within SMTC window duration.

- If *deriveSSB-IndexFromCell* is not enabled and the SCS of data or SSB symbols is 960kHz, the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI SSB symbols to be measured, and on K' data symbol(s) before each consecutive SSB symbols to be measured and K' data symbol(s) after each consecutive SSB symbols to be measured within SMTC window duration.

The following scheduling restriction applies to SS-RSRQ measurement on an FR2 intra-frequency cell

- If *deriveSSB-IndexFromCell* is enabled the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on SSB symbols to be measured, RSSI measurement symbols, and on K data symbol(s) before each consecutive SSB to be measured/RSSI symbols and K data symbol(s) after each consecutive SSB to be measured/RSSI symbols within SMTC window duration

- If *deriveSSB-IndexFromCell* is not enabled and the SCS of data and SSB symbols are smaller than 960kHz, the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on all symbols within SMTC window duration.

- If *deriveSSB-IndexFromCell* is not enabled and the SCS of SSB symbols is 960kHz, the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on SSB symbols to be measured, RSSI measurement symbols, and on K' data symbol(s) before each consecutive SSB to be measured/RSSI symbols and K' data symbol(s) after each consecutive SSB to be measured/RSSI symbols within SMTC window duration.

where

- If the high layer signalling of *smtc2* is configured in TS 38.331 [2], the SMTC periodicity follows *smtc2*; Otherwise the SMTC periodicity follows *smtc1*.

- The signaling *deriveSSB-IndexFromCell* is always enabled for FR2-1 and FR2-2 when SSB is using 120 kHz SCS and 480 kHz SCS.

- K=1 for a serving cell with data symbols of 120 kHz SCS

- K=4 for a serving cell with data symbols of 480 kHz SCS and SSB symbols of 120kHz or 480kHz SCS

- K=3 for a serving cell with data symbols of 480 kHz SCS and SSB symbols of 960kHz SCS

- K=7 for a serving cell with data symbols of 960 kHz SCS and SSB symbols of 120kHz or 480kHz SCS

- K=4 for a serving cell with data symbols of 960 kHz SCS and SSB symbols of 960kHz SCS

- K'=[2] for a serving cell with data symbols of 120 kHz SCS and SSB symbols of 960kHz SCS

- K'=[4] for a serving cell with data symbols of 480 kHz SCS and SSB symbols of 960kHz SCS

- K'=[7] for a serving cell with data symbols of 960 kHz SCS and SSB symbols of 960kHz SCS

When intra-band carrier aggregation in FR2 is performed, the scheduling restrictions due to a given serving cell should also apply to all other serving cells in the same band on the symbols that fully or partially overlap with aforementioned restricted symbols.

When inter-band carrier aggregation in FR2 is performed, there are no scheduling restrictions on FR2 serving cells in the bands due to SS-RSRP, SS-RSRQ or SS-SINR measurement on an FR2 intra-frequency cell in different bands, provided that UE is capable of independent beam management on this FR2 band pair. Additionally, there is no scheduling restriction if the UE is configured with different numerology between SSB on one FR2 band and data on the other FR2 band provided the UE is configured for IBM operation for the band pair.

Note: When inter-band carrier aggregation in FR2 is performed, the scheduling restrictions as defined in clause 9.2.5.3.1 due to a given serving cell should also apply to another serving cell in a different FR2 band on the symbols that fully or partially overlap with the aforementioned restricted symbols, if UE does not have the capability of supporting *simultaneousRxTxInterBandCA* for this FR2 band pair.

If following conditions are met:

- The UE has been notified about system information update through paging,
- The gap between the UE's reception of PDCCH that UE monitors in the Type 2-PDCCH CSS set that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots

For the SSB and CORESET for RMSI scheduling multiplexing patterns 3, the UE is expected to receive the PDCCH that the UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured; and

For the SSB and CORESET for RMSI scheduling multiplexing patterns 2, the UE is expected to receive PDSCH that corresponds to the PDCCH that the UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured.

9.2.5.3.4 Scheduling availability of UE performing measurements on FR1 or FR2 in case of FR1-FR2 inter-band CA

There are no scheduling restrictions on FR1 serving cell(s) due to measurements performed on FR2 serving cell frequency layer. However, the scheduling restrictions as defined in clause 9.2.5.3.1 due to a given serving cell in FR2 should also apply to another serving cell in an FR1 band on the symbols that fully or partially overlap with the aforementioned restricted symbols, if UE does not have the capability of supporting *simultaneousRxTxInterBandCA* for this FR1-FR2 band pair.

There are no scheduling restrictions on FR2 serving cell(s) due to measurements performed on FR1 serving cell frequency layer. However, the scheduling restrictions as defined in clause 9.2.5.3.1 due to a given serving cell in FR1 should also apply to another serving cell in an FR2 band on the symbols that fully or partially overlap with the aforementioned restricted symbols, if UE does not have the capability of supporting *simultaneousRxTxInterBandCA* for this FR1-FR2 band pair.

9.2.5.4 SFTD Measurements between PCell and PSCell

9.2.5.4.1 Introduction

This clause contains SFTD measurement requirements for UE which supports NR-DC and is configured with a PSCell in RRC_CONNECTED state. The UE shall perform SFTD measurement between PCell and PSCell, and report the SFTD result with/without SS-RSRP after the network requests with *reportType* for the associated *reportConfig* set to *reportSFTD*. The overall delay includes RRC procedure delay defined in clause 12 in TS 38.331 [2], and SFTD measurement reporting delay in clause 9.2.5.4.3..

9.2.5.4.2 SFTD Measurement delay

When no DRX is used in either of PCell and PSCell, the physical layer measurement period of the SFTD measurement shall be $T_{measure_SFTD1}$ = max(200, 5 x SMTC period) ms, where the SMTC period refers to the maximum between the configured SMTC period in PCell and PSCell.

When DRX is used in either of the PCell or the PSCell, or in both PCell and PSCell, the physical layer measurement period ($T_{measure_SFTD1}$) of the SFTD measurement shall be as specified in Table 9.2.5.4.2-1.

Table 9.2.5.4.2-1: SFTD measurement requirement when DRX is used

DRX cycle length (s) Note 3	$T_{measure_SFTD1}$ (s)
≤0.04	max(0.2, 5 x SMTC period) (Note2)
0.04<DRX cycle≤0.32	8 x max(DRX cycle, SMTC period)
0.32<DRX cycle≤10.24	5 x DRX cycle
Note 1: SMTC period in this table refers to the maximum between the configured SMTC period in PCell and PSCell. Note 2: Number of DRX cycles depends upon the DRX cycle in use Note 3: DRX cycle length in this table refers to the DRX cycle length configured for PCell or PSCell. When DRX is used in both PCell and PSCell, DRX cycle length in this table refers to the longer of the DRX cycle lengths for PCell and PSCell.	

If PSCell is changed without changing carrier frequency of PSCell, while the UE is performing SFTD measurements, the UE shall still meet SFTD measurement and accuracy requirements for the new PSCell. In this case the UE shall restart the SFTD measurement, and the total physical layer measurement period shall not exceed $T_{measure_SFTD2}$ as defined by the following expression:

$$T_{measure_SFTD2} = (M+1)*(T_{measure_SFTD1}) + M*T_{PSCell_change_NRDC}$$

where:

M is the number of times the NR PSCell is changed over the measurement period ($T_{measure_SFTD2}$), and

$T_{PSCell_change_NRDC}$ is the time necessary to change the PSCell; it can be up to 25ms.

If PCell is changed, or if PSCell is changed with different carrier frequency from PSCell, the UE shall terminate SFTD measurements.

The measurement accuracy for the SFTD measurement when DRX is used as well as when no DRX is used shall be as specified in the clause 10.1.21.

9.2.5.4.3 SFTD Measurement Reporting Delay

The SFTD measurement reporting delay is defined as the time between a command that will trigger an SFTD measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: 2 x TTI_{DCCH}. This measurement reporting delay excludes any delay caused by no UL resources available for UE to send the measurement report.

The SFTD measurement reporting delay shall be less than measurement period defined in clause 9.2.5.4.2 plus the RRC procedure delay defined in TS 38.331 [2].

9.2.6 Intra-frequency measurements with measurement gaps

9.2.6.1 Void

9.2.6.2 Intra-frequency cell identification

When a measurement gap is provided or an activated Pre-MG is provided without any pre-MG status changed during the measurement period, the UE shall be able to identify a new detectable intra frequency cell within $T_{identify_intra_without_index}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured), or the UE has been indicated that the neighbour cell is synchronous with the serving cell (*deriveSSB-IndexFromCell* is enabled). Otherwise UE shall be able to identify a new detectable intra frequency cell within $T_{identify_intra_with_index.}$ The UE shall be able to identify a new detectable intra frequency SS block of an already detected cell within $T_{identify_intra_without_index.}$ It is assumed that *deriveSSB-IndexFromCell* is always enabled for FR1 TDD and FR2 with SCS smaller or equal to 480 kHz.

$$T_{identify_intra_without_index} = T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra} \text{ ms}$$

$$T_{identify_intra_with_index} = T_{PSS/SSS_sync_ntra} + T_{SSB_measurement_period_intra} + T_{SSB_time_index_intra} \text{ ms}$$

Where:

T_{PSS/SSS_sync_intra}: it is the time period used in PSS/SSS detection given in table 9.2.6.2-1, 9.2.6.2-2 or 9.2.6.2-9.

- For UE supporting power class 6 with *highSpeedMeasFlagFR2-r17* configured, if SMTC <= 40ms, T_{PSS/SSS_sync_intra} is given in Table 9.2.6.2-9; otherwise, T_{PSS/SSS_sync_intra} is given in Table 9.2.6.2-2.

$T_{SSB_time_index_intra}$: it is the time period used to acquire the index of the SSB being measured given in table 9.2.6.2-3 or 9.2.6.2-10 (for FR2-2).

$T_{SSB_measurement_period_intra}$: equal to a measurement period of SSB based measurement given in table 9.2.6.3-1 or 9.2.6.3-2.

- For UE supporting power class 6 with *highSpeedMeasFlagFR2-r17* configured, if SMTC <= 40ms, $T_{SSB_measurement_period_intra}$ is given in Table 9.2.6.3-4; otherwise, $T_{SSB_measurement_period_intra}$ is given in Table 9.2.6.3-2.

  $CSSF_{intra}$: it is a carrier specific scaling factor and is determined according to $CSSF_{within_gap,i}$ in clause 9.1.5.2 for measurement conducted within measurement gaps.

  K_{gap} is the scaling factor for a SSB frequency layer to be measured within an associated measurement gap pattern. K_{gap} = 1 when the UE is not configured with concurrent measurement gaps or not supporting [concurrent measurement gaps]. Otherwise, $K_{gap} = N_{total} / N_{available}$, where $N_{available}$ and N_{total} are calculated as follows:

  For a window W of duration max(SMTC period, MGRP_max), where MGRP max is the maximum MGRP across all configured per-UE measurement gap and per-FR measurement gap within the same FR as the SSB frequency layer, and starting from the beginning of any SMTC occasion:

  -- N_{total} is the total number of SMTC occasions that are covered by instances of the associated measurement gap within the window W, including those overlapped with other measurement gap occasions within the window, and

  $N_{available}$ is the number of SMTC occasions that are covered by instances of the non-dropped associated measurement gap within the window W after accounting for measurement gap collisions by applying the measurement gap collision rule in section 9.1.8.3.

  When concurrent measurement gaps are configured, requirements in this clause do not apply if $N_{available}$ =0.

  $M_{pss/sss_sync_with_gaps}$: For a UE supporting FR2-1 power class 1 or 5, $M_{pss/sss_sync\ with_gaps}$=40. For a UE supporting FR2-1 power class 2, $M_{pss/sss_sync\ with_gaps}$ =24. For a UE supporting FR2-1 power class 3, $M_{pss/sss_sync\ with_gaps}$ =24. For a UE supporting FR2-1 power class 4, $M_{pss/sss_sync\ with_gaps}$ =24. For a UE supporting FR2-2 power class 1, $M_{pss/sss_sync\ with_gaps}$ = 60. For a UE supporting FR2-2 power class 2, $M_{pss/sss_sync\ with_gaps}$ = 36. For a UE supporting FR2-2 power class 3, $M_{pss/sss_sync\ with_gaps}$ = 36.

  $M_{meas_period_with_gaps}$: For a UE supporting FR2-1 power class 1 or 5, $M_{meas_period_with_gaps}$ =40. For a UE supporting FR2-1 power class 2, $M_{meas_period_with_gaps}$ =24. For a UE supporting FR2-1 power class 3, $M_{meas_period_with_gaps}$ =24. For a UE supporting FR2-1 power class 4, $M_{meas_period\ with_gaps}$ =24. For a UE supporting FR2-2 power class 1, $M_{meas_period_with_gaps}$ = 60. For a UE supporting FR2-2 power class 2, $M_{meas_period_with_gaps}$ = 36. For a UE supporting FR2-2 power class 3, $M_{meas_period_with_gaps}$ = 36.

- $M_{SSB_index_intra}$: For a UE supporting FR2-2 power class 1, $M_{SSB_index_intra}$ = 72. For a UE supporting FR2-2 power class 2, $M_{SSB_index_intra}$ = 48. For a UE supporting FR2 power class 3, $M_{SSB_index_intra}$ = 48.

If the higher layer signaling in TS 38.331 [2] of *smtc2* is present and smtc1 is fully overlapping with measurement gaps and smtc2 is partially overlapping with measurement gaps, requirements are not specified for $T_{identify_intra_without_index}$ or $T_{identify_intra_with_index}$.

If MCG DRX is in use, cell identification requirements for intra-frequency measurement in MCG specified in Table 9.2.6.2-1, Table 9.2.6.2-2, and Table 9.2.6.2-3 shall depend on the MCG DRX cycle. If SCG DRX is in use, cell identification requirements for intra-frequency measurement in SCG specified in Table 9.2.6.2-1, Table 9.2.6.2-2, and Table 9.2.6.2-3 shall depend on the SCG DRX cycle. Otherwise, the requirements for when DRX is not in use shall apply.

Table 9.2.6.2-1: Time period for PSS/SSS detection (FR1)

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	max(600ms, 5 x K_{gap} x max(MGRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(600ms, ceil($M2^{Note\ 1}$x 5 x K_{gap}) x max(MGRP, SMTC period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	Ceil(5 x K_{gap}) x max(MGRP, DRX cycle) x $CSSF_{intra}$
NOTE 1: When *highSpeedMeasFlag-r16* is not configured, M2 = 1.5; When *highSpeedMeasFlag-r16* is configured, M2 = 1.5 if SMTC periodicity > 40 ms, otherwise M2=1.	
NOTE 2: When *highSpeedMeasFlag-r16* is configured, the requirements apply only to UE supporting either *measurementEnhancement-r16* or *intraNR-MeasurementEnhancement-r16* on measurements of the primary component carrier and do not apply to measurements of a secondary component carrier with active SCell.	
NOTE 3: For a UE supporting concurrent measurement gaps, if multiple concurrent gaps are configured, the MGRP is the periodicity of the MG pattern associated to the intra-frequency layer.	

NOTE 4: When highSpeedMeasCA-Scell-r17 is configured, the requirements apply to UE on measurements of secondary component carrier with active SCell.

Table 9.2.6.2-2: Time period for PSS/SSS detection (FR2)

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	max(600ms, $M_{pss/sss_sync_with_gaps}$ x K_{FR} x K_{gap} x max(MGRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(600ms, ceil(1.5x $M_{pss/sss_sync_with_gaps}$ x K_{FR} x K_{gap}) x max(MGRP, SMTC period, DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	Ceil($M_{pss/sss_sync_with_gaps}$ x K_{FR} x K_{gap}) x max(MGRP, DRX cycle) x $CSSF_{intra}$
NOTE 1: For a UE supporting concurrent gaps, if multiple concurrent gaps are configured, the MGRP is the periodicity of the MG pattern associated to the intra-frequency layer.	
NOTE 2: K_{FR} is a scaling factor depending on the frequency range and the SSB SCS. For FR2-1, KFR = 1. For FR2-2: KFR = 1 if the SCS of the SSB of the cell being detected is 120 kHz, KFR = 2 if the SCS of the SSB of the cell being detected is 480 kHz, and KFR = 3 if the SCS of the SSB of the cell being detected is 960 kHz.	

Table 9.2.6.2-3: Time period for time index detection (Frequency range FR1)

DRX cycle	$T_{SSB_time_index_intra}$
No DRX	max(120ms, ceil(3 x K_{gap}) x max(MGRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(120ms, ceil($M2^{Note\ 1}$x 3 x K_{gap}) x max(MGRP, SMTC period,DRX cycle) x $CSSF_{intra}$)
DRX cycle>320ms	Ceil(3 x K_{gap})x max(MGRP, DRX cycle) x $CSSF_{intra}$
NOTE 1: When *highSpeedMeasFlag-r16* is not configured, M2 = 1.5; When *highSpeedMeasFlag-r16* is configured, M2 = 1.5 if SMTC periodicity > 40 ms, otherwise M2=1.	
NOTE 2: When *highSpeedMeasFlag-r16* is configured, the requirements apply only to UE supporting either *measurementEnhancement-r16* or *intraNR-MeasurementEnhancement-r16* on measurements of the primary component carrier and do not apply to measurements of a secondary component carrier with active SCell.	
NOTE 3: For a UE supporting concurrent gaps, if multiple concurrent gaps are configured, the MGRP is the periodicity of the MG pattern associated to the intra-frequency layer.	
NOTE 4: When highSpeedMeasCA-Scell-r17 is configured, the requirements apply to UE on measurements of secondary component carrier with active SCell.	

Table 9.2.6.2-7: Void

Table 9.2.6.2-8: Void

Table 9.2.6.2-8: Void

Table 9.2.6.2-9: Time period for PSS/SSS detection when *highSpeedMeasFlagFR2-r17* is configured, (FR2) when SMTC period <=40ms

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	max(600ms, $M1^{Note\ 2}$ x K_{gap} x max(MGRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 80ms	max(600ms, ceil($M1^{Note2}$ x K_{gap}) x max(MGRP, SMTC period, DRX cycle)) x $CSSF_{intra}$
80ms< DRX cycle≤ 320ms	max(600ms, ceil($M_{pss/sss_sync_with_gaps}$ x K_{gap}) x max(MGRP, SMTC period, DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	Ceil($M_{pss/sss_sync_with_gaps}$ x K_{gap}) x max(MGRP, DRX cycle) x $CSSF_{intra}$
NOTE 1: For a UE supporting concurrent gaps, if multiple concurrent gaps are configured, the MGRP is the periodicity of the MG pattern associated to the intra-frequency layer.	
NOTE 2: For UE supporting power class 6, M1 = 6 if *highSpeedMeasFlagFR2-r17* = set1 or M1 = 18 if *highSpeedMeasFlagFR2-r17* = set2	
NOTE 3: Void	

Table 9.2.6.2-10: Time period for time index detection (Frequency range FR2-2)

DRX cycle	$T_{SSB_time_index_intra}$
No DRX	max(200ms, ceil($M_{SSB_index_intra}$ x K_{gap} x max(MGRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(200ms, ceil(1.5 x $M_{SSB_index_intra}$ x K_{gap}) x max(MGRP, SMTC period, DRX cycle) x $CSSF_{intra}$)
DRX cycle>320ms	Ceil($M_{SSB_index_intra}$ x K_{gap})x DRX cycle x $CSSF_{intra}$

9.2.6.3 Intrafrequency Measurement Period

The requirements in this clause apply when a measurement gap is provided or when an activated Pre-MG is provided without any pre-MG status changed during the measurement period.

The measurement period for FR1 intrafrequency measurements with gaps is as shown in table 9.2.6.3-1.

The measurement period for FR2 intrafrequency measurements with gaps is as shown in table 9.2.6.3-2.

When *highSpeedMeasFlag-r16* is configured, $T_{SSB_measurement_period_intra}$ is specified in Table 9.2.6.3-3.

If MCG DRX is in use, measurement period requirements for intra-frequency measurement in MCG specified in Table 9.2.6.3-1 and Table 9.2.6.3-2, shall depend on the MCG DRX cycle. If SCG DRX is in use, measurement period requirements for intra-frequency measurement in SCG specified in Table 9.2.6.3-1and Table 9.2.6.3-2, shall depend on the SCG DRX cycle. Otherwise, the requirements for when DRX is not in use shall apply.

For either an FR1 or FR2 serving cell, longer measurement period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

Table 9.2.6.3-1: Measurement period for intra-frequency measurements with gaps(FR1)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	max(200ms, ceil(5 x K_{gap})x max(MGRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(200ms, ceil(1.5x 5 x K_{gap}) x max(MGRP, SMTC period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	Ceil(5 x K_{gap}) x max(MGRP, DRX cycle) x $CSSF_{intra}$
NOTE 1: For a UE supporting concurrent gaps, if multiple concurrent gaps are configured, the MGRP is the periodicity of the MG pattern associated to the intra-frequency layer.	

Table 9.2.6.3-2: Measurement period for intra-frequency measurements with gaps(FR2)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	max(400ms, ceil($M_{meas_period\ with_gaps}$ x K_{gap}) x max(MGRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(400ms, ceil(1.5 x $M_{meas_period\ with_gaps}$ x K_{gap}) x max(MGRP, SMTC period, DRX cycle)) $^{Note\ 1}$ x $CSSF_{intra}$
DRX cycle>320ms	Ceil($M_{meas_period\ with_gaps}$ x K_{gap}) x max(MGRP, DRX cycle) x $CSSF_{intra}$
NOTE 1: For a UE supporting concurrent gaps, if multiple concurrent gaps are configured, the MGRP is the periodicity of the MG pattern associated to the intra-frequency layer.	

Table 9.2.6.3-3: Measurement period When *highSpeedMeasFlag-r16* is configured (Frequency Range FR1)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	max(200ms, ceil(5 x K_{gap}) x max(MGRP, SMTC period)) $^{Note\ 1}$ x $CSSF_{intra}$
DRX cycle≤ 160ms	max(200ms, ceil($M2^{Note\ 2}$ x 5 x K_{gap}) x max(MGRP, SMTC period,DRX cycle)) x $CSSF_{intra}$

160ms < DRX cycle≤ 320ms	max(200ms, ceil($M2^{Note\ 2}$ x 4 x K_{gap}) x max(MGRP, DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	Ceil($Y^{Note\ 3}$ x K_{gap}) x max(MGRP, DRX cycle) x $CSSF_{intra}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	
NOTE 2: M2 = 1.5 if SMTC periodicity > 40 ms, otherwise M2=1	
NOTE 3: Y=3 when SMTC <= 40ms, Y=5 when SMTC > 40ms	
NOTE 4: When *highSpeedMeasFlag-r16* is configured, the requirements apply only to UE supporting either *measurementEnhancement-r16* or *intraNR-MeasurementEnhancement-r16* on measurements of the primary component carrier and do not apply to measurements of a secondary component carrier with active SCell.	
NOTE 5: For a UE supporting concurrent gaps, if multiple concurrent gaps are configured, the MGRP is the periodicity of the MG pattern associated to the intra-frequency layer.	
NOTE 6: When highSpeedMeasCA-Scell-r17 is configured, the requirements also apply to UE on measurements of secondary component carrier with active SCell.	

Table 9.2.6.3-4: Measurement period for intra-frequency measurements with gaps when *highSpeedMeasFlagFR2-r17* is configured (FR2) when SMTC period<=40ms

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	max(400ms, ceil($M1^{Note\ 2}$ x K_{gap}) x max(MGRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 80ms	max(400ms, ceil($M1^{Note\ 2}$ x K_{gap}) x max(MGRP, SMTC period, DRX cycle))$^{Note\ 1}$ x $CSSF_{intra}$
80ms< DRX cycle≤ 320ms	max(400ms, ceil($M_{meas_period\ with_gaps}$ x K_{gap}) x max(MGRP, SMTC period, DRX cycle))$^{Note\ 1}$ x $CSSF_{intra}$
DRX cycle>320ms	Ceil($M_{meas_period\ with_gaps}$ x K_{gap}) x max(MGRP, DRX cycle) x $CSSF_{intra}$
NOTE 1: For a UE supporting concurrent gaps, if multiple concurrent gaps are configured, the MGRP is the periodicity of the MG pattern associated to the intra-frequency layer.	
NOTE 2: For UE supporting power class 6, M1 = 6 if *highSpeedMeasFlagFR2-r17* = set1 or M1 = 18 if *highSpeedMeasFlagFR2-r17* = set2	
NOTE 3: Void	

9.2.7 Intra-frequency measurements with NCSG

9.2.7.1 Intra-frequency cell identification

For the UE supporting NCSG, if NCSG is provided, the UE shall be able to identify a new detectable intra frequency cell within $T_{identify_intra_without_index}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured), or the UE has been indicated that the neighbour cell is synchronous with the serving cell (*deriveSSB-IndexFromCell* is enabled). Otherwise UE shall be able to identify a new detectable intra frequency cell within $T_{identify_intra_with_index.}$ The UE shall be able to identify a new detectable intra frequency SS block of an already detected cell within $T_{identify_intra_without_index.}$ It is assumed that *deriveSSB-IndexFromCell* is always enabled for FR1 TDD and FR2.

$$T_{identify_intra_without_index} = T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra}\ \text{ms}$$

$$T_{identify_intra_with_index} = T_{PSS/SSS_sync_ntra} + T_{SSB_measurement_period_intra} + T_{SSB_time_index_intra}\ \text{ms}$$

Where:

T_{PSS/SSS_sync_intra}: it is the time period used in PSS/SSS detection given in table 9.2.7.1-1, 9.2.7.1-2, 9.2.7.1-4 (deactivated Scell) or 9.2.7.1-5 (deactivated Scell).

$T_{SSB_time_index_intra}$: it is the time period used to acquire the index of the SSB being measured given in table 9.2.7.1-3 or 9.2.7.1-6 (deactivated Scell).

$T_{SSB_measurement_period_intra}$: equal to a measurement period of SSB based measurement given in table 9.2.7.2-1, 9.2.7.2-2, 9.2.7.2-3, 9.2.7.2-4 (deactivated Scell) or 9.2.7.2-5 (deactivated Scell).

$CSSF_{intra}$: it is a carrier specific scaling factor and is determined according to $CSSF_{within_ncsg,i}$ in clause 9.1.5.3 for measurement conducted within NCSG.

$M_{pss/sss_sync_with_gaps}$: For a UE supporting FR2 power class 1 or 5, $M_{pss/sss_sync\ with_gaps}$=40. For a UE supporting FR2 power class 2, $M_{pss/sss_sync\ with_gaps}$ =24. For a UE supporting FR2 power class 3, $M_{pss/sss_sync\ with_gaps}$ =24. For a UE supporting power class 4, $M_{pss/sss_sync\ with_gaps}$ =24

$M_{meas_period_with_gaps}$: For a UE supporting power class 1 or 5, $M_{meas_period_with_gaps}$ =40. For a UE supporting power class 2, $M_{meas_period_with_gaps}$ =24. For a UE supporting power class 3, $M_{meas_period_with_gaps}$ =24. For a UE supporting power class 4, $M_{meas_period\ with_gaps}$ =24.

If the higher layer signaling in TS 38.331 [2] of *smtc2* is present and smtc1 is fully overlapping with NCSG and smtc2 is partially overlapping with NCSG, requirements are not specified for $T_{identify_intra_without_index}$ or $T_{identify_intra_with_index}$.

Table 9.2.7.1-1: Time period for PSS/SSS detection with NCSG (FR1)

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	max(600ms, 5 x max(VIRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(600ms, ceil($M2^{Note\ 1}$x 5) x max(VIRP, SMTC period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	5 x max(VIRP, DRX cycle) x $CSSF_{intra}$
NOTE 1: When *highSpeedMeasFlag-r16* is not configured, M2 = 1.5; When *highSpeedMeasFlag-r16* is configured, M2 = 1.5 if SMTC periodicity > 40 ms, otherwise M2=1.	
NOTE 2: When *highSpeedMeasFlag-r16* is configured, the requirements apply only to UE supporting either *measurementEnhancement-r16* or *[intraRAT-MeasurementEnhancement-r16]* on measurements of the primary component carrier and do not apply to measurements of a secondary component carrier with active SCell.	

Table 9.2.7.1-2: Time period for PSS/SSS detection with NCSG (FR2)

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	max(600ms, $M_{pss/sss_sync_with_gaps}$ x max(VIRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(600ms, ceil(1.5x $M_{pss/sss_sync_with_gaps}$) x max(VIRP, SMTC period, DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	$M_{pss/sss_sync_with_gaps}$ x max(VIRP, DRX cycle) x $CSSF_{intra}$

Table 9.2.7.1-3: Time period for time index detection with NCSG (FR1)

DRX cycle	$T_{SSB_time_index_intra}$
No DRX	max(120ms, 3 x max(VIRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(120ms, ceil($M2^{Note\ 1}$x 3) x max(VIRP, SMTC period,DRX cycle) x $CSSF_{intra}$)
DRX cycle>320ms	3 x max(VIRP, DRX cycle) x $CSSF_{intra}$
NOTE 1: *highSpeedMeasFlag-r16* is not configured, M2 = 1.5; When *highSpeedMeasFlag-r16* is configured, M2 = 1.5 if SMTC periodicity > 40 ms, otherwise M2=1.	
NOTE 2: When *highSpeedMeasFlag-r16* is configured, the requirements apply only to UE supporting either *measurementEnhancement-r16* or *[intraRAT-MeasurementEnhancement-r16]* on measurements of the primary component carrier and do not apply to measurements of a secondary component carrier with active SCell.	

Table 9.2.7.1-4: Time period for PSS/SSS detection with NCSG (deactivated SCell) (FR1)

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	5 x max(measCycleSCell, VIRP) x $CSSF_{intra}$
DRX cycle≤ 320ms	5 x max(measCycleSCell, VIRP, 1.5xDRX cycle) x $CSSF_{intra}$
DRX cycle> 320ms	5 x max(measCycleSCell, VIRP, DRX cycle) x $CSSF_{intra}$

Table 9.2.7.1-5: Time period for PSS/SSS detection with NCSG (deactivated SCell) (FR2)

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	M_{pss/sss_with_ncsg} x max(measCycleSCell, VIRP) x $CSSF_{intra}$
DRX cycle≤ 320ms	M_{pss/sss_with_ncsg} x max(measCycleSCell, VIRP, 1.5xDRX cycle) x $CSSF_{intra}$
DRX cycle> 320ms	M_{pss/sss_with_ncsg} x max(measCycleSCell, VIRP, DRX cycle) x $CSSF_{intra}$

Table 9.2.7.1-6: Time period for time index detection with NCSG (deactivated SCell) (FR1)

DRX cycle	$T_{SSB_time_index_intra}$
No DRX	3 x max(measCycleSCell, VIRP) x $CSSF_{intra}$
DRX cycle≤ 320ms	3 x max(measCycleSCell, VIRP, 1.5xDRX cycle) x $CSSF_{intra}$
DRX cycle> 320ms	3 x max(measCycleSCell, VIRP,DRX cycle) x $CSSF_{intra}$

9.2.7.2 Measurement period

When *highSpeedMeasFlag-r16* is configured, the measurement period with NCSG is specified in Table 9.2.7.2-3.

For either an FR1 or FR2 serving cell, longer measurement period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

Table 9.2.7.2-1: Measurement period for intra-frequency measurements with NCSG (FR1)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	max(200ms, 5 x max(VIRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(200ms, ceil(1.5x 5) x max(VIRP, SMTC period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	5 x max(VIRP, DRX cycle) x $CSSF_{intra}$

Table 9.2.7.2-2: Measurement period for intra-frequency measurements with NCSG (FR2)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	max(400ms, $M_{meas_period\ with_gaps}$ x max(VIRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(400ms, ceil(1.5 x $M_{meas_period\ with_gaps}$) x max(VIRP, SMTC period, DRX cycle)) [Note 1] x $CSSF_{intra}$
DRX cycle>320ms	$M_{meas_period\ with_gaps}$ x max(VIRP, DRX cycle) x $CSSF_{intra}$

Table 9.2.7.2-3: Measurement period with NCSG When *highSpeedMeasFlag-r16* is configured (FR1)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	max(200ms, 5 x max(VIRP, SMTC period)) [Note 1] x $CSSF_{intra}$
DRX cycle≤ 160ms	max(200ms, ceil($M2^{Note\ 2}$ x 5) x max(VIRP, SMTC period,DRX cycle)) x $CSSF_{intra}$
160ms < DRX cycle≤ 320ms	max(200ms, ceil($M2^{Note\ 2}$ x 4) x max(VIRP, DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	$Y^{Note\ 3}$ x max(VIRP, DRX cycle) x $CSSF_{intra}$

NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified
NOTE 2: M2 = 1.5 if SMTC periodicity > 40 ms, otherwise M2=1
NOTE 3: Y=3 when SMTC <= 40ms, Y=5 when SMTC > 40ms
NOTE 4: When *highSpeedMeasFlag-r16* is configured, the requirements apply only to UE supporting either *measurementEnhancement-r16* or *[intraRAT-MeasurementEnhancement-r16]* on measurements of

the primary component carrier and do not apply to measurements of a secondary component carrier with active SCell.

Table 9.2.7.2-4: Measurement period for intra-frequency measurements with NCSG (deactivated SCell) (FR1)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	5 x max(measCycleSCell, VIRP) x $CSSF_{intra}$
DRX cycle≤ 320ms	5 x max(measCycleSCell, VIRP, 1.5xDRX cycle) x $CSSF_{intra}$
DRX cycle> 320ms	5 x max(measCycleSCell, VIRP, DRX cycle) x $CSSF_{intra}$

Table 9.2.7.2-5: Measurement period for intra-frequency measurements with NCSG (deactivated SCell) (FR2)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	$M_{meas_period\ with_gaps}$ x max(measCycleSCell, VIRP) x $CSSF_{intra}$
DRX cycle≤ 320ms	$M_{meas_period\ with_gaps}$ x max(measCycleSCell, VIRP, 1.5xDRX cycle) x $CSSF_{intra}$
DRX cycle> 320ms	$M_{meas_period\ with_gaps}$ x max(measCycleSCell, VIRP, DRX cycle) x $CSSF_{intra}$

Note: Requirements for measurement on deactivated SCC in this clause do not apply if SMTC on the deactivated SCC is fully non-overlapped with NCSG, and the requirements for measurement on deactivated SCC specified in clause 9.2.5 apply.

9.2.7.3 Scheduling availability during intra-frequency measurement with NCSG

Scheduling availability specified in 9.2.5.3 applies to scheduling availability during intra-frequency measurement with NCSG.

9.2A NR intra-frequency measurements with CCA

9.2A.1 Introduction

The requirements in clause 9.2.A apply for intra-frequency measurements on carrier frequency with CCA.

When the intra-frequency measurement is performed on a neighbour cell in FR2-2 with shared spectrum channel access, UE shall determine the CCA mode of the neighbour cell according to *channelAccessMode2-r17*of the cell configured in *MeasObjectNR*. If *channelAccessMode2-r17* of the cell is enabled, UE shall assume that CCA applies to the cell and perform measurement accordingly, and the requirements in clause 9.2A shall apply; otherwise, UE shall assume that CCA does not apply to the cell and perform measurement accordingly, and requirements in 9.2 shall apply.

A measurement is defined as a SSB based intra-frequency measurement provided the centre frequency of the SSB of the serving cell indicated for measurement and the centre frequency of the SSB of the neighbour cell are the same, and the subcarrier spacing of the two SSBs are also the same.

The UE shall be able to identify new intra-frequency cells and perform SS-RSRP, SS-RSRQ, and SS-SINR measurements of identified intra-frequency cells if carrier frequency information is provided by PCell or the PSCell, even if no explicit neighbour list with physical layer cell identities is provided.

The UE can perform intra-frequency SSB based measurements without measurement gaps if

- the SSB is completely contained in the active BWP of the UE, or
- the active downlink BWP is initial BWP[3].

For intra-frequency SSB based measurements without measurement gaps, UE may cause scheduling restriction as specified in clause 9.2A.5.3.

SSB based measurements are configured along with one or two measurement timing configuration(s) (SMTC(s)) which provides periodicity, duration and offset information on a window of up to 5ms where the measurements are to be performed. For intra-frequency connected mode measurements, up to two measurement window periodicities may be configured. A single measurement window offset and measurement duration are configured per intra-frequency measurement object.

When measurement gaps are needed, the UE is not expected to detect SSB which start earlier than the gap starting time + switching time, nor detect SSB which end later than the gap end – switching time. Switching time is 0.5ms for frequency range FR1 and 0.25 ms for frequency range FR2-2.

In the requirements of clause 9.2A, the term SMTC occasion not available at the UE refers to when the SMTC contains SSBs configured by gNB in a cell on a carrier frequency subject to CCA, but N_{SSB} candidate SSB positions for the same SSB index within the discovery burst transmission window are not available at the UE due to DL CCA failures at gNB during the corresponding period, where:

- For the cell detection procedure: N_{SSB} is at least one candidate SSB position (NOTE: the one candidate SSB position for the cell detection shall not be impacted by the set of candidate SSB positions which are already being measured by the UE within the current measurement period of the on-going measurements), and

- For other procedures in clause 9.2A: N_{SSB} are the first two successive candidate SSB positions when two or more candidate SSB positions are configured for this SSB index in one discovery burst transmission window, otherwise N_{SSB} is one candidate SSB position;

otherwise the SMTC occasion is considered as available at the UE.

For the FR2-2 requirements of clause 9.2A, an SMTC occasion group consists of N consecutive SMTC occasions, where N is the UE Rx beam sweeping scaling factor. An SMTC occasion group is not available, when at least one SMTC occasion in the group is not transmitted by the gNB.

9.2A.2 Requirements applicability

The requirements in clause 9.2A apply, provided:

- The cell being identified or measured is detectable.

An intra-frequency cell shall be considered detectable when for each relevant SSB:

- SS-RSRP related side conditions given in clause 10.1.27 and TBD for FR1 and FR2-2, respectively, for a corresponding Band,

- SS-RSRQ related side conditions given in clause 10.1.29 and TBD for FR1 and FR2-2, respectively, for a corresponding Band,

- SS-SINR related side conditions given in clause 10.1.31 and TBD for FR1 and FR2-2, respectively, for a corresponding Band,

- SSB_RP and SSB Ês/Iot according to Annex B.2.8 for a corresponding Band.

9.2A.3 Number of cells and number of SSB

9.2A.3.1 Requirements for FR1

For each intra-frequency layer, during each layer 1 measurement period, the UE shall be capable of performing SS-RSRP, SS-RSRQ, and SS-SINR measurements for at least:

- 8 identified cells, and

- 14 SSBs with different SSB index and/or PCI on the intra-frequency layer, where the number of SSBs in the serving cell (except for the SCell) is not smaller than the number of configured RLM-RS SSB resources.

9.2A.3.2 Requirements for FR2-2

For one single intra-frequency layer in a band, during each layer 1 measurement period, the UE shall be capable of performing SS-RSRP, SS-RSRQ, and SS-SINR measurements for at least:

- 6 identified cells, and
- 24 SSBs with different SSB index and/or PCI,

where this single intra-frequency layer shall be:

- PCC when UE is configured with SA NR operation mode with PCC in the band; or
- PSCC when UE is configured with NR-DC with PSCC in the band; or
- One of the SCCs on which UE is configured to report SSB based measurements when neither PCC nor PSCC is in the same band, so that the selected SCC shall be an SCC where the UE is configured with SS-RSRP measurement reporting if such SCC exists, otherwise the selected SCC is determined by UE implementation.

The UE shall also be capable of performing SS-RSRP, SS-RSRQ, and SS-SINR measurements for at least 2 SSBs on serving cell for each of the other intra-frequency layer(s) in the same band.

9.2A.4 Measurement Reporting Requirements

9.2A.4.1 Periodic Reporting

Reported RSRP, RSRQ, and RS-SINR measurements contained in periodically triggered measurement reports shall meet the requirements in clauses 10.1. 36 (RSRP for FR1), TBD (RSRP for FR2-2),10.1.29(RSRQ for FR1), TBD (RSRQ for FR2-2), 10.1.31 (RS-SINR for FR1) and TBD (RS-SINR for FR2-2), respectively.

9.2A.4.2 Event-triggered Periodic Reporting

Reported RSRP, RSRQ, and RS-SINR measurements contained in periodically triggered measurement reports shall meet the requirements in clauses 10.1.36 (RSRP for FR1), TBD (RSRP for FR2-2), 10.1.29 (RSRQ for FR1), TBD (RSRQ for FR2-2), 10.1.31 (RS-SINR for FR1) and TBD (RS-SINR for FR2-2) , respectively.

The first report in event triggered periodic measurement reporting shall meet the requirements specified in clause 9.2A.4.3.

9.2A.4.3 Event Triggered Reporting

Reported RSRP, RSRQ, and RS-SINR measurements contained in periodically triggered measurement reports shall meet the requirements in clauses 10.1.36 (RSRP for FR1), TBD (RSRP for FR2-2), 10.1.29 (RSRQ for FR1), TBD (RSRQ for FR2-2), 10.1.31 (RS-SINR for FR1) and TBD (RS-SINR for FR2-2), respectively.

The UE shall not send any event triggered measurement reports as long as no reporting criteria is fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: 2 x TTI_{DCCH}. This measurement reporting delay excludes a delay which caused by no UL resources being available for UE to send the measurement report on, and all delays due to UL CCA failures until the successful transmission of the report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{identify\ intra\ with\ index_CCA}$ or $T_{identify\ intra\ without\ index_CCA}$ defined in clause 9.2A.5.1 or clause 9.2A.6.2. When L3 filtering is used an additional delay can be expected.

A cell is detectable only if at least one SSBs measured from the Cell being configured remains detectable during the time period $T_{identify_intra_without_index_CCA}$ or $T_{identify_intra_with_index_CCA}$ as defined in clause 9.2A.5.1 or clause 9.2A.6.2. If a

cell which has been detectable at least for the time period $T_{identify\ intra\ without\ index_CCA}$ or $T_{identify\ intra\ with\ index_CCA}$ defined in clause 9.2A.5.1 or clause 9.2A.6.2 becomes undetectable for a period≤ 8 seconds and then the cell becomes detectable again with the same spatial reception parameter and triggers an event, the event triggered measurement reporting delay shall be less than $T_{SSB_measurement_period_intra_CCA}$ provided the timing to that cell has not changed more than ± 3200/2^{μ} Tc while the measurement gap has not been available and the L3 filter has not been used, where μ is the SCS configuration as defined in clause 4.2 of TS 38.211 [3]. When L3 filtering is used, an additional delay can be expected.

9.2A.5 Intra-frequency measurements without measurement gaps

9.2A.5.1 Intra-frequency cell identification

The UE shall be able to identify a new detectable intra frequency cell within $T_{identify_intra_without_index_CCA}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index(*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured), or the UE is indicated that the neighbour cell is synchronous with the serving cell (*deriveSSB-IndexFromCell* is enabled). Otherwise UE shall be able to identify a new detectable intra frequency cell within $T_{identify_intra_with_index_CCA}$. The UE shall be able to identify a new detectable intra frequency SS block of an already detected cell within $T_{identify_intra_without_index_CCA}$.

$$T_{identify_intra_without_index_CCA} = (T_{PSS/SSS_sync_intra_CCA} + T_{SSB_measurement_period_intra_CCA})\ ms$$

$$T_{identify_intra_with_index\ CCA} = (T_{PSS/SSS_sync_intra_CCA} + T_{SSB_measurement_period_intra_CCA} + T_{SSB_time_index_intra_CCA})\ ms$$

Where:

$T_{PSS/SSS_sync_intra_CCA}$: it is the time period used in PSS/SSS detection given in table 9.2A.5.1-1, 9.2A.5.1-3 (deactivated Scell) .

$T_{SSB_time_index_intra_CCA}$: it is the time period used to acquire the index of the SSB being measured given in table 9.2A.5.1-2 or 9.2A.5.1-4 (deactivated SCell).

$T_{SSB_measurement_period_intra_CCA}$: equal to a measurement period of SSB based measurement given in table 9.2A.5.2-1, 9.2A.5.2-2 (deactivated Scell). $CSSF_{intra}$: it is a carrier specific scaling factor and is determined

- according to $CSSF_{outside_gap,i}$ in clause 9.1.5.1 for measurement conducted outside measurement gaps, i.e. when intra-frequency SMTC is fully non overlapping or partially overlapping with measurement gaps, or according to $CSSF_{within_gap,i}$ in clause 9.1.5.2 for measurement conducted within measurement gaps, i.e. when intra-frequency SMTC is fully overlapping with measurement gaps.

- $M_{pss/sss_sync_w/o_gaps_CCA}$: For a UE supporting FR2-2 power class 1, $M_{pss/sss_sync_w/o_gaps\ CCA}$ = 60. For a UE supporting FR2-2 power class 2, $M_{pss/sss_sync_w/o_gaps\ CCA}$ = 36. For a UE supporting FR2-2 power class 3, $M_{pss/sss_sync_w/o_gaps\ CCA}$ = 36.

- $M_{meas_period_w/o_gaps_CCA}$: For a UE supporting FR2-2 power class 1, $M_{meas_period_w/o_gaps\ CCA}$ = 60. For a UE supporting FR2-2 power class 2, $M_{meas_period_w/o_gaps\ CCA}$ = 36. For a UE supporting FR2-2 power class 3, $M_{meas_period_w/o_gaps\ CCA}$ = 36.

- $M_{SSB_index_intra_CCA:}$ For a UE supporting FR2-2 power class 1, $M_{SSB_index_intra\ CCA}$ = 72 samples. For a UE supporting FR2-2 power class 2, $M_{SSB_index_intra\ CCA}$ = 48 samples. For a UE supporting FR2 power class 3, $M_{SSB_index_intra\ CCA}$ = 48 samples.

  N: is the UE Rx beam sweeping scaling factor. N = 12.

  When intra-frequency SMTC is fully non overlapping with measurement gaps or intra-frequency SMTC is fully overlapping with MGs, Kp=1

  When intra-frequency SMTC is partially overlapping with measurent gaps, Kp = 1/(1- (SMTC period /MGRP)), where SMTC period < MGRP.

For FR2-2,

$K_{layer1_measurement}$=TBD

If MCG DRX is in use, intra-frequency cell identification requirements specified in Table 9.2A.5.1-1, Table 9.2A.5.1-2, Table 9.2A.5.1-3, Table 9.2A.5.1-4, Table 9.2A.5.1-5 and Table 9.2A.5.1-6 shall depend on the MCG DRX cycle. If

SCG DRX is in use, intra-frequency cell identification requirements specified in Table 9.2A.5.1-1, Table 9.2A.5.1-2, Table 9.2A.5.1-3, Table 9.2A.5.1-4, Table 9.2A.5.1-5 and Table 9.2A.5.1-6 shall depend on the SCG DRX cycle. Otherwise, the requirements for when DRX is not in use shall apply.

The requirements apply provided any two closest SMTC occasions available at the UE for the measurement shall be separated by no more than the maximum time requirement for the cell to remain known defined in clause 9.2A.4.3.

Table 9.2A.5.1-1: Time period for PSS/SSS detection (FR1)

Condition	$T_{PSS/SSS_sync_intra_CCA}$
No DRX	max(600ms, ceil((5+$L_{PSS/SSS}$) x K_p) x SMTC period)[Note 1] x $CSSF_{intra}$
DRX cycle≤ 320ms	max(600ms, ceil(1.5x (5+$L_{PSS/SSS}$) x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	ceil((5+$L_{PSS/SSS}$) x K_p) x DRX cycle x $CSSF_{intra}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	
NOTE 2: When DRX is not configured, $L_{PSS/SSS}$ is the number of SMTC occasions not available at the UE during $T_{PSS/SSS_sync_intra_CCA}$ for PSS/SSS detection, where $L_{PSS/SSS}$< $L_{PSS/SSS,max}$. When DRX is configured, $L_{PSS/SSS}$ is the number of DRX cycles in which at least one SMTC occasion is not available at the UE during $T_{PSS/SSS_sync_intra_CCA}$ for PSS/SSS detection, where $L_{PSS/SSS}$< $L_{PSS/SSS,max}$. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. FFS: The UE is not required to determine the availability of SMTC occasions more frequent than what is required by $CSSF_{intra}$.	
NOTE 3: $L_{PSS/SSS,max}$ =7 for Max(DRX cycle,SMTC period)≤40ms where DRX cycle is 0 for non-DRX, $L_{PSS/SSS,max}$ =5 for 40ms<Max(DRX cycle,SMTC period)≤320ms, $L_{PSS/SSS,max}$ = 3 for DRX cycle>320ms.	
NOTE 4: Upon exceeding $L_{PSS/SSS,max}$, the UE is not required to meet the requirements for PSS/SSS detection.	

Table 9.2A.5.1-2: Time period for time index detection (FR1)

Condition	$T_{SSB_time_index_intra_CCA}$
No DRX	max(120ms, ceil((3+L_{ind}) x K_p) x SMTC period)[Note 1] x $CSSF_{intra}$
DRX cycle≤ 320ms	max(120ms, ceil (1.5 x (3+L_{ind}) x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	Ceil((3+L_{ind}) x K_p) x DRX cycle x $CSSF_{intra}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	
NOTE 2: When DRX is not configured, L_{ind} is the number of SMTC occasions not available at the UE during $T_{SSB_time_index_intra_CCA}$ for index detection, where L_{ind} ≤ $L_{ind,max}$. When DRX is configured, L_{ind} is the number of DRX cycles in which at least one SMTC occasion is not available at the UE during $T_{SSB_time_index_intra_CCA}$ for index detection, where L_{ind} ≤ $L_{ind,max}$. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. FFS: The UE is not required to determine the availability of SMTC occasions more frequent than what is required by $CSSF_{intra}$.	
NOTE 3: $L_{ind,max}$ = 5 for Max(DRX cycle,SMTC period)≤40ms where DRX cycle is 0 for non-DRX, $L_{ind,max}$ = 3 for 40ms<Max(DRX cycle,SMTC period)≤320ms, $L_{ind,max}$ =2 for DRX cycle>320ms.	
NOTE 4: Upon exceeding $L_{ind,max}$ over the period of time $T_{SSB_time_index_intra_CCA}$, the UE has to restart the time index detection procedure.	

Table 9.2A.5.1-3: Time period for PSS/SSS detection, deactivated SCell (FR1)

Condition	$T_{PSS/SSS_sync_intra_CCA}$
No DRX	(5 + $L_{PSS/SSS,deact}$) x measCycleSCell x $CSSF_{intra}$
DRX cycle≤ 320ms	(5 + $L_{PSS/SSS,\ deact}$) x max(measCycleSCell, 1.5xDRX cycle) x $CSSF_{intra}$
DRX cycle>320ms	(5 + $L_{PSS/SSS,\ deact}$) x max(measCycleSCell, DRX cycle) x $CSSF_{intra}$
NOTE 1: When DRX is not configured, $L_{PSS/SSS,\ deact}$ is the number of SMTC occasions not available at the UE during $T_{PSS/SSS_sync_intra_CCA}$ for PSS/SSS detection, where $L_{PSS/SSS,\ deact}$< $L_{PSS/SSS,\ deact,max}$. When DRX is configured, $L_{PSS/SSS,\ deact}$ is the number of DRX cycles in which at least one SMTC occasion is not available at the UE during $T_{PSS/SSS_sync_intra_CCA}$ for PSS/SSS detection, where $L_{PSS/SSS,\ deact}$< $L_{PSS/SSS,\ deact,max}$.When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. When configured with measurement cycles, the UE is not required to determine the availability of SMTC occasions more frequent than once per	

	measurement cycle. FFS: The UE is not required to determine the availability of SMTC occasions more frequent than what is required by $CSSF_{intra}$.
NOTE 2:	$L_{PSS/SSS, deact,max,}$ = 7 for Max(DRX cycle, measCycleSCell)≤40ms where DRX cycle is 0 for non-DRX, $L_{PSS/SSS, deact,max}$ = 5 for 40ms<Max(DRX cycle, measCycleSCell)≤320ms, $L_{PSS/SSS, deact,max}$ = 3 for DRX cycle>320ms.
NOTE 3:	Upon exceeding $L_{PSS/SSS, deact,max,}$, the UE is not required to meet the requirements for PSS/SSS detection.

Table 9.2A.5.1-4: Time period for time index detection, deactivated SCell (FR1)

Condition	$T_{SSB_time_index_intra_CCA}$
No DRX	$(3+L_{ind,deact})$ x measCycleSCell x $CSSF_{intra}$
DRX cycle≤ 320ms	$(3+L_{ind,deact})$ x max(measCycleSCell, 1.5xDRX cycle) x $CSSF_{intra}$
DRX cycle>320ms	$(3+L_{ind,deact})$ x max(measCycleSCell, DRX cycle) x $CSSF_{intra}$
NOTE 1:	When DRX is not configured, $L_{ind,deact}$ is the number of SMTC occasions not available at the UE during $T_{SSB_time_index_intra_CCA}$ for index detection, where $L_{ind,deact} < L_{ind,deact,max}$. When DRX is configured, $L_{ind,deact}$ is the number of DRX cycles in which at least one SMTC occasion is not available at the UE during $T_{SSB_time_index_intra_CCA}$ for index detection, where $L_{ind,deact} < L_{ind,deact,max}$. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. When configured with measurement cycles, the UE is not required to determine the availability of SMTC occasions more frequent than once per measurement cycle. FFS: The UE is not required to determine the availability of SMTC occasions more frequent than what is required by $CSSF_{intra}$.
NOTE 2:	$L_{ind,deact,max,}$ = 5 for Max(DRX cycle, measCycleSCell)≤40ms where DRX cycle is 0 for non-DRX, $L_{ind,deact,max}$ = 3 for 40ms<Max(DRX cycle, measCycleSCell)≤320ms, $L_{ind,deact,max}$ = 2 for DRX cycle>320ms.
NOTE 3:	Upon exceeding $L_{ind,deact,max}$ over the period of time $T_{SSB_time_index_intra_CCA}$, the UE has to restart the time index detection procedure.

Table 9.2A.5.1-5: Time period for PSS/SSS detection, (Frequency range FR2-2)

Condition	$T_{PSS/SSS_sync_intra_CCA}$
No DRX	max(600ms, ceil(($M_{pss/sss_sync_w/o_gaps_CCA}$ x K_{FR} + N x $L_{PSS/SSS}$) x K_p x $K_{layer1_measurement}$) x SMTC period)[Note 1] x $CSSF_{intra}$
DRX cycle≤ 320ms	max(600ms, ceil(1.5 x ($M_{pss/sss_sync_w/o_gaps_CCA}$ x K_{FR} + N x $L_{PSS/SSS}$) x K_p x $K_{layer1_measurement}$) x max(SMTC period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	ceil(($M_{pss/sss_sync_w/o_gaps_CCA}$ x K_{FR} + N x $L_{PSS/SSS}$) x K_p x $K_{layer1_measurement}$) x DRX cycle x $CSSF_{intra}$
NOTE 1:	If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified
NOTE 2:	When DRX is not configured, $L_{PSS/SSS}$ is the number of SMTC occasion groups not available at the UE during $T_{PSS/SSS_sync_intra_CCA}$ for PSS/SSS detection, where $L_{PSS/SSS} < L_{PSS/SSS,max}$. A SMTC occasion group consists of N consecutive SMTC occasions. An SMTC occasion group is not available, when at least one SMTC occasion in the group is not transmitted by the gNB. When DRX is configured, $L_{PSS/SSS}$ is the number of [DRX cycle groups] in which at least one SMTC occasion is not available at the UE during $T_{PSS/SSS_sync_intra_CCA}$ for PSS/SSS detection, where $L_{PSS/SSS} < L_{PSS/SSS,max}$. [A [DRX occasion group consists of N consecutive DRX cycles. A DRX occasion group occasion group is not available, when at least one SMTC occasion in the group is not transmitted by the gNB.] When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle.
NOTE 3:	$L_{PSS/SSS,max}$ =[7] for Max(DRX cycle,SMTC period)≤40ms where DRX cycle is 0 for non-DRX, $L_{PSS/SSS,max}$ =[5] for 40ms<Max(DRX cycle,SMTC period)≤320ms, $L_{PSS/SSS,max}$ = [3] for DRX cycle>320ms.
NOTE 4:	Upon exceeding $L_{PSS/SSS,max}$, the UE is not required to meet the requirements for PSS/SSS detection.
NOTE 5:	K_{FR} is a scaling factor depending on the frequency range and SSB SCS. K_{FR} = 1 if the SCS of the SSB of the cell being detected is 120 kHz, K_{FR} = 2 if the SCS of the SSB of the cell being detected is 480 kHz, and K_{FR}= 3 if the SCS of the SSB of the cell being detected is 960 kHz.

Table 9.2A.5.1-6: Time period for PSS/SSS detection, deactivated SCell (FR2-2)

DRX cycle	$T_{PSS/SSS_sync_intra_CCA}$
No DRX	$Ceil((M_{pss/sss_sync_w/o_gaps} \times K_{FR} + N \times L_{PSS/SSS,deact}) \times K_p) \times measCycleSCell \times CSSF_{intra}$
DRX cycle≤ 320ms	$Ceil((M_{pss/sss_sync_w/o_gaps} \times K_{FR} + N \times L_{PSS/SSS,deact}) \times K_p) \times max(measCycleSCell, 1.5xDRX\ cycle) \times CSSF_{intra}$
DRX cycle> 320ms	$Ceil((M_{pss/sss_sync_w/o_gaps} \times K_{FR} + N \times L_{PSS/SSS,deact}) \times K_p) \times max(measCycleSCell, DRX\ cycle) \times CSSF_{intra}$
NOTE 1: When DRX is not configured, $L_{PSS/SSS,\ deact}$ is the number of SMTC occasions groups not available at the UE during $T_{PSS/SSS_sync_intra_CCA}$ for PSS/SSS detection, where $L_{PSS/SSS,\ deact} < L_{PSS/SSS,\ deact,max}$. A SMTC occasion group consists of N consecutive SMTC occasions. An SMTC occasion group is not available, when at least one SMTC occasion in the group is not transmitted by the gNB. When DRX is configured, $L_{PSS/SSS,\ deact}$ is the number of [DRX cycle groups] in which at least one SMTC occasion is not available at the UE during $T_{PSS/SSS_sync_intra_CCA}$ for PSS/SSS detection, where $L_{PSS/SSS,\ deact} < L_{PSS/SSS,\ deact,max}$.When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. [A DRX occasion group consists of N consecutive DRX cycles. A DRX occasion group occasion group is not available, when at least one SMTC occasion in the group is not transmitted by the gNB.] When configured with measurement cycles, the UE is not required to determine the availability of SMTC occasions more frequent than once per measurement cycle.	
NOTE 2: $L_{PSS/SSS,\ deact,max,}$ = [7] for Max(DRX cycle, measCycleSCell)≤40ms where DRX cycle is 0 for non-DRX, $L_{PSS/SSS,\ deact,max}$ = [5] for 40ms<Max(DRX cycle, measCycleSCell)≤320ms, $L_{PSS/SSS,\ deact,max}$ = [3] for DRX cycle>320ms.	
NOTE 3: Upon exceeding $L_{PSS/SSS,\ deact,max,}$, the UE is not required to meet the requirements for PSS/SSS detection.	
NOTE 4: Void	
NOTE 5: K_{FR} is a scaling factor depending on the frequency range and SSB SCS. K_{FR} = 1 if the SCS of the SSB of the cell being detected is 120 kHz, K_{FR} = 2 if the SCS of the SSB of the cell being detected is 480 kHz, and K_{FR}= 3 if the SCS of the SSB of the cell being detected is 960 kHz.	

Table 9.2A.5.1-7: Time period for time index detection (FR2-2)

DRX cycle	$T_{SSB_time_index_intra_CCA}$
No DRX	$Max(200ms, ceil((M_{SSB_index_intra_CCA} + N \times L_{ind}) \times K_p) \times SMTC\ period) \times CSSF_{intra}$
DRX cycle≤ 320ms	$Max(200ms, ceil(1.5 \times ((M_{SSB_index_intra} + N \times L_{ind}) \times K_p) \times Max(SMTC\ period, DRX\ cycle)) \times CSSF_{intra}$
DRX cycle> 320ms	$ceil((M_{SSB_index_intra} + N \times L_{ind}) \times K_p) \times DRX\ cycle \times CSSF_{intra}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	
NOTE 2: When DRX is not configured, L_{ind} is the number of SMTC occasion groups not available at the UE during $T_{SSB_time_index_intra_CCA}$ for index detection, where $L_{ind} \leq L_{ind,max}$. When DRX is configured, L_{ind} is the number of DRX cycles groups in which at least one SMTC occasion is not available at the UE during $T_{SSB_time_index_intra_CCA}$ for index detection, where $L_{ind} \leq L_{ind,max}$. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle.	
NOTE 3: $L_{ind,max}$ = 5 for Max(DRX cycle,SMTC period)≤40ms where DRX cycle is 0 for non-DRX, $L_{ind,max}$ = 3 for 40ms<Max(DRX cycle,SMTC period)≤320ms, $L_{ind,max}$ =2 for DRX cycle>320ms.	
NOTE 4: Upon exceeding $L_{ind,max}$ over the period of time $T_{SSB_time_index_intra_CCA}$, the UE has to restart the time index detection procedure.	

Table 9.2A.5.1-8: Time period for time index detection, deactivated SCell (FR2-2)

DRX cycle	$T_{SSB_time_index_intra_CCA}$
No DRX	$Max(200ms, ceil((M_{SSB_index_intra_CCA} + N \times L_{ind,deact}) \times K_p) \times SMTC\ period) \times CSSF_{intra}$
DRX cycle≤ 320ms	$Max(200ms, ceil(1.5 \times ((M_{SSB_index_intra} + N \times L_{ind,deact}) \times K_p) \times Max(SMTC\ period, DRX\ cycle)) \times CSSF_{intra}$
DRX cycle> 320ms	$ceil((M_{SSB_index_intra} + N \times L_{ind,deact}) \times K_p) \times DRX\ cycle \times CSSF_{intra}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

NOTE 2: When DRX is not configured, Lind,deact is the number of SMTC occasion groups not available at the UE during $T_{SSB_time_index_intra_CCA}$ for index detection, where $L_{ind,deact} \leq L_{ind,deact,max}$. When DRX is configured, $L_{ind,deact}$ is the number of DRX cycles groups in which at least one SMTC occasion is not available at the UE during $T_{SSB_time_index_intra_CCA}$ for index detection, where $L_{ind,deact} \leq L_{ind,deact,max}$. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle.
NOTE 3: $L_{ind,deact,max}$ = 5 for Max(DRX cycle,SMTC period)≤40ms where DRX cycle is 0 for non-DRX, $L_{ind,deact,max}$ = 3 for 40ms<Max(DRX cycle,SMTC period)≤320ms, $L_{ind,deact,max}$ =2 for DRX cycle>320ms.
NOTE 4: Upon exceeding $L_{ind,deact,max}$ over the period of time $T_{SSB_time_index_intra_CCA}$, the UE has to restart the time index detection procedure.

9.2A.5.2 Measurement period

The measurement period for intra-frequency measurements without gaps is as shown in table 9.2A.5.2-1, 9.2A.5.2-2 (deactivated SCell).

If SCG DRX is in use, intra-frequency measurement period requirements specified in Table 9.2A.5.2-1, Table 9.2A.5.2-2 shall depend on the SCG DRX cycle. Otherwise, the requirements for when DRX is not in use shall apply.

The requirements apply provided any two closest SMTC occasions available at the UE for the measurement shall be separated by no more than the maximum time requirement for the cell to remain known defined in clause 9.2A.4.3.

When the time period of unsuccessful measurement attempts due to exceeding the maximum number of unavailable at the UE SMTC occasions of an already identified cell exceeds the maximum time requirement for the cell to remain known defined in clause 9.2A.4.3, UE shall stop the measurement attempts on this SSB and perform the detection procedure again like for any other SSB.

Table 9.2A.5.2-1: Measurement period for intra-frequency measurements without gaps (FR1)

Condition	$T_{SSB_measurement_period_intra_CCA}$
No DRX	max(200ms, ceil((5+L_{meas}) x K_p) x SMTC period)[Note 1] x $CSSF_{intra}$
DRX cycle≤ 320ms	max(200ms, ceil(1.5x (5+L_{meas}) x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	ceil((5+L_{meas}) x K_p) x DRX cycle x $CSSF_{intra}$

NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified
NOTE 2: When DRX is not configured, L_{meas} is the number of SMTC occasions not available at the UE during $T_{SSB_measurement_period_intra_CCA}$ for measurement, where $L_{meas} < L_{meas,max}$. When DRX is configured, L_{meas} is the number of DRX cycles in which at least one SMTC occasion is not available at the UE during $T_{SSB_measurement_period_intra_CCA}$ for measurement, where $L_{meas} < L_{meas,max}$. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. FFS: The UE is not required to determine the availability of SMTC occasions more frequent than what is required by $CSSF_{intra}$.
NOTE 3: $L_{meas,max}$ = 7 for Max(DRX cycle,SMTC period)≤40ms where DRX cycle is 0 for non-DRX, $L_{meas,max}$ = 5 for 40ms<Max(DRX cycle,SMTC period)≤320ms, $L_{meas,max}$ = 3 for DRX cycle>320ms.
NOTE 4: Upon exceeding $L_{meas,max}$ over the period of time $T_{SSB_measurement_period_intra_CCA}$, the UE has to restart the measurement procedure.

Table 9.2A.5.2-2: Measurement period for intra-frequency measurements without gaps, deactivated SCell (FR1)

Condition	$T_{SSB_measurement_period_intra_CCA}$
No DRX	(5+$L_{meas,deact}$) x measCycleSCell x $CSSF_{intra}$
DRX cycle≤ 320ms	(5+$L_{meas, deact}$) x max(measCycleSCell, 1.5xDRX cycle) x $CSSF_{intra}$
DRX cycle>320ms	(5+$L_{meas, deact}$) x max(measCycleSCell, DRX cycle) x $CSSF_{intra}$

NOTE 1: When DRX is not configured, $L_{meas,deact}$ is the number of SMTC occasions not available at the UE during $T_{SSB_measurement_period_intra_CCA}$ for measurement, where $L_{meas,deact} < L_{meas, ,deact ,max}$. When DRX is configured, $L_{meas,deact}$ is the number of DRX cycles in which at least one SMTC occasion is not available at the UE during $T_{SSB_measurement_period_intra_CCA}$ for measurement, where $L_{meas,deact} < L_{meas, ,deact ,max}$. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. When configured with measurement cycles, the

	UE is not required to determine the availability of SMTC occasions more frequent than once per measurement cycle. FFS: The UE is not required to determine the availability of SMTC occasions more frequent than what is required by $CSSF_{intra}$.
NOTE 2:	$L_{meas,\ ,deact\ ,max,}$ = 7 for Max(DRX cycle, measCycleSCell)≤40ms where DRX cycle is 0 for non-DRX, $L_{meas,\ ,deact\ ,max}$ = 5 for 40ms<Max(DRX cycle, measCycleSCell)≤320ms, $L_{meas,\ ,deact\ ,max}$ = 3 for DRX cycle>320ms.
NOTE 3:	Upon exceeding $L_{meas,deact,max}$ over the period of time $T_{SSB_measurement_period_intra_CCA}$, the UE has to restart the measurement procedure.

Table 9.2A.5.2-3: Measurement period for intra-frequency measurements without gaps (FR2-2)

DRX cycle	$T_{SSB_measurement_period_intra_CCA}$
No DRX	max(400ms, ceil(($M_{meas_period_w/o_gaps_CCA}$ + N x L_{meas}) x K_p x $K_{layer1_measurement}$) x SMTC period)[Note 1] x $CSSF_{intra}$
DRX cycle≤ 320ms	max(400ms, ceil(1.5x ($M_{meas_period_w/o_gaps_CCA}$ + N x L_{meas}) x K_p x $K_{layer1_measurement}$) x max(SMTC period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	ceil(($M_{meas_period_w/o_gaps_CCA}$ + N x L_{meas}) x K_p x $K_{layer1_measurement}$) x DRX cycle x $CSSF_{intra}$
NOTE 1:	If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified
NOTE 2:	When DRX is not configured, L_{meas} is the number of SMTC occasion groups not available at the UE during $T_{SSB_measurement_period_intra_CCA}$ for measurement, where L_{meas} <$L_{meas,max}$. A SMTC occasion group consists of N consecutive SMTC occasions. An SMTC occasion group is not available, when at least one SMTC occasion in the group is not transmitted by the gNB. When DRX is configured, L_{meas} is the number of [DRX cycle groups] in which at least one SMTC occasion is not available at the UE during $T_{SSB_measurement_period_intra_CCA}$ for measurement, where L_{meas} <$L_{meas,max}$. . [A DRX occasion group consists of N consecutive DRX cycles. A DRX occasion group occasion group is not available, when at least one SMTC occasion in the group is not transmitted by the gNB.] When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle.
NOTE 3:	$L_{meas,max}$ = [7] for Max(DRX cycle,SMTC period)≤40ms where DRX cycle is 0 for non-DRX, $L_{meas,max}$ = [5] for 40ms<Max(DRX cycle,SMTC period)≤320ms, $L_{meas,max}$ = [3] for DRX cycle>320ms.
NOTE 4:	Upon exceeding $L_{meas,max}$ over the period of time $T_{SSB_measurement_period_intra_CCA}$, the UE has to restart the measurement procedure.

Table 9.2.5.2-4: Measurement period for intra-frequency measurements without gaps, deactivated Scell (FR2-2)

DRX cycle	$T_{SSB_measurement_period_intra_CCA}$
No DRX	Ceil(($M_{meas_period_w/o_gaps_CCA}$ + N x $L_{meas,deact}$) x K_p) x measCycleSCell x $CSSF_{intra}$
DRX cycle≤ 320ms	Ceil(($M_{meas_period_w/o_gaps_CCA}$ + N x $L_{meas,deact}$) x K_p) x max(measCycleSCell, 1.5xDRX cycle) x $CSSF_{intra}$
DRX cycle> 320ms	Ceil(($M_{meas_period_w/o_gaps_CCA}$ + N x $L_{meas,deact}$) x K_p) x max(measCycleSCell, DRX cycle) x $CSSF_{intra}$
NOTE 1:	When DRX is not configured, $L_{meas,deact}$ is the number of SMTC occasion groups not available at the UE during $T_{SSB_measurement_period_intra_CCA}$ for measurement, where $L_{meas,deact}$ <$L_{meas,\ ,deact\ ,max}$. A SMTC occasion group consists of N consecutive SMTC occasions. An SMTC occasion group is not available, when at least one SMTC occasion in the group is not transmitted by the gNB. When DRX is configured, $L_{meas,deact}$ is the number of [DRX cycle groups] in which at least one SMTC occasion is not available at the UE during $T_{SSB_measurement_period_intra_CCA}$ for measurement, where $L_{meas,deact}$ <$L_{meas,\ ,deact\ ,max}$. [A DRX occasion group consists of N consecutive DRX cycles. A DRX occasion group occasion group is not available, when at least one SMTC occasion in the group is not transmitted by the gNB.] When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. When configured with measurement cycles, the UE is not required to determine the availability of SMTC occasions more frequent than once per measurement cycle. FFS: The UE is not required to determine the availability of SMTC occasions more frequent than what is required by $CSSF_{intra}$.
NOTE 2:	$L_{meas,\ ,deact\ ,max,}$ = [7] for Max(DRX cycle, measCycleSCell)≤40ms where DRX cycle is 0 for non-DRX, $L_{meas,\ ,deact\ ,max}$ = [5] for 40ms<Max(DRX cycle, measCycleSCell)≤320ms, $L_{meas,\ ,deact\ ,max}$ = [3] for DRX cycle>320ms.
NOTE 3:	Upon exceeding $L_{meas,deact,max}$ over the period of time $T_{SSB_measurement_period_intra_CCA}$, the UE has to restart the measurement procedure.

9.2A.5.3 Scheduling availability of UE during intra-frequency measurements

UE shall be capable of measuring without measurement gaps when the SSB is completely contained in the active bandwidth part of the UE. When any of the conditions in the following clauses is met, there are restrictions on the scheduling availability; otherwise, there is no scheduling restriction. Note that the SSB symbols indicated by the union set of *SSB-ToMeasure* from all the configured measurement objects on the same serving carrier which can be merged [2], if it is configured; otherwise, all *L* SSB symbols within SMTC window duration defined in clause 4.1 of TS 38.213 [3] are included.

9.2A.5.3.1 Scheduling availability of UE performing measurements in TDD bands on FR1

When UE performs intra-frequency measurements in a TDD band, the following restrictions apply due to SS-RSRP or SS-SINR measurement

- The UE is not expected to transmit PUCCH/PUSCH/SRS on SSB symbols configured to be measured, and on 1 data symbol before each consecutive SSB symbols configured to be measured and 1 data symbol after each consecutive SSB symbols configured to be measured within SMTC window duration if *deriveSSB-IndexFromCell* is enabled. If the high layer in TS 38.331[2] signaling of smtc2 is configured, the SMTC periodicity follows smtc2; Otherwise SMTC periodicity follows smtc1.

- The UE is not expected to transmit PUCCH/PUSCH/SRS on all symbols within SMTC window duration if *deriveSSB-IndexFromCell* is not enabled. If the high layer in TS 38.331 [2] signaling of smtc2 is configured, the SMTC periodicity follows smtc2; Otherwise SMTC periodicity follows smtc1.

When the UE performs intra-frequency measurements in a TDD band, the following restrictions apply due to SS-RSRQ measurement

- The UE is not expected to transmit PUCCH/PUSCH/SRS on SSB symbols configured to be measured, RSSI measurement symbols, and on 1 data symbol before each consecutive SSB configured to be measured/RSSI symbols and 1 data symbol after each consecutive SSB configured to be measured/RSSI symbols within SMTC window duration if *deriveSSB-IndexFromCell* is enabled. If the high layer signaling of smtc2 is configured (in TS 38.331), the SMTC periodicity follows smtc2; Otherwise the SMTC periodicity follows smtc1.

- The UE is not expected to transmit PUCCH/PUSCH/SRS on all symbols within SMTC window duration if *deriveSSB-IndexFromCell* is not enabled. If the high layer in TS 38.331 signaling of smtc2 is configured, the SMTC periodicity follows smtc2; Otherwise SMTC periodicity follows smtc1.

When intra-band carrier aggregation in unlicensed spectrum is performed, the scheduling restrictions due to a given serving cell should also apply to all other serving cells in the same band on the symbols that fully or partially overlap with the aforementioned restricted symbols.

9.2A.5.3.2 Scheduling availability of UE performing measurements with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UE which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to SS-RSRP/RSRQ/SINR measurement

- If *deriveSSB-IndexFromCell* is enabled the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration.

- If *deriveSSB-IndexFromCell* is not enabled the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on all symbols within SMTC window duration.

When intra-band carrier aggregation is performed, the scheduling restrictions due to a given serving cell should also apply to all other serving cells in the same band on the symbols that fully or partially overlap with aforementioned restricted symbols.

9.2A.5.3.3 Scheduling availability of UE performing measurements in TDD bands on FR2-2

The requirements in clause 9.2.5.3.3 apply.

9.2A.6 Intra-frequency measurements with measurement gaps

9.2A.6.1 Intra-frequency cell identification

The UE shall be able to identify a new detectable intra frequency cell within $T_{identify_intra_without_index_CCA}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured), or the UE has been indicated that the neighbour cell is synchronous with the serving cell (*deriveSSB-IndexFromCell* is enabled). Otherwise UE shall be able to identify a new detectable intra frequency cell within $T_{identify_intra_with_index_CCA}$. The UE shall be able to identify a new detectable intra frequency SS block of an already detected cell within $T_{identify_intra_without_index\ CCA}$.

$$T_{identify_intra_without_index\ CCA} = T_{PSS/SSS_sync_intra_CCA} + T_{SSB_measurement_period_intra_CCA} \text{ ms}$$

$$T_{identify_intra_with_index_CCA} = T_{PSS/SSS_sync_intra_CCA} + T_{SSB_measurement_period_intra_CCA} + T_{SSB_time_index_intra_CCA}$$

Where:

$T_{PSS/SSS_sync_intra_CCA}$: it is the time period used in PSS/SSS detection given in table 9.2A.6.1-1.

$T_{SSB_time_index_intra_CCA}$: it is the time period used to acquire the index of the SSB being measured given in table 9.2A.6.1-2.

$T_{SSB_measurement_period_intra_CCA}$: equal to a measurement period of SSB based measurement given in table 9.2A.6.2-1 or 9.2A.6.1-3.

$CSSF_{intra}$: it is a carrier specific scaling factor and is determined according to $CSSF_{within_gap,i}$ in clause 9.1.5.2 for measurement conducted within measurement gaps.

$M_{pss/sss_sync_w/o_gaps_CCA}$: For a UE supporting FR2-2 power class 1, $M_{pss/sss_sync_w/o_gaps\ CCA} = 60$. For a UE supporting FR2-2 power class 2, $M_{pss/sss_sync_w/o_gaps\ CCA} = 36$. For a UE supporting FR2-2 power class 3, $M_{pss/sss_sync_w/o_gaps\ CCA} = 36$.

$M_{meas_period_w/o_gaps_CCA}$: For a UE supporting FR2-2 power class 1, $M_{meas_period_w/o_gaps\ CCA} = 60$. For a UE supporting FR2-2 power class 2, $M_{meas_period_w/o_gaps\ CCA} = 36$. For a UE supporting FR2-2 power class 3, $M_{meas_period_w/o_gaps\ CCA} = 36$.

- $M_{SSB_index_intra_CCA}$: For a UE supporting FR2-2 power class 1, $M_{SSB_index_intra\ CCA} = 72$ samples. For a UE supporting FR2-2 power class 2, $M_{SSB_index_intra\ CCA} = 48$ samples. For a UE supporting FR2 power class 3, $M_{SSB_index_intra\ CCA} = 48$ samples.

N: is the UE Rx beam sweeping scaling factor. N = 12.

If MCG DRX is in use, intra-frequency cell identification requirements specified in Table 9.2A.6.1-1, Table 9.2A.6.1-2 and Table 9.2A.6.1-3 shall depend on the MCG DRX cycle. If SCG DRX is in use, intra-frequency cell identification requirements specified in Table 9.2A.6.1-1, Table 9.2A.6.1-2 and Table 9.2A.6.1-3 shall depend on the SCG DRX cycle. Otherwise, the requirements for when DRX is not in use shall apply.

The requirements apply provided any two closest SMTC occasions available at the UE for the measurement shall be separated by no more than the maximum time requirement for the cell to remain known defined in clause 9.2A.4.3.

Table 9.2A.6.1-1: Time period for PSS/SSS detection (FR1)

Condition	$T_{PSS/SSS_sync_intra_CCA}$
No DRX	max(600ms, (5+$L_{PSS/SSS,gaps}$) x max(MGRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(600ms, ceil(1.5x (5+$L_{PSS/SSS,gaps}$)) x max(DRX cycle, MGRP, SMTC period)) x $CSSF_{intra}$
DRX cycle>320ms	(5+$L_{PSS/SSS,gaps}$) x (MGRP, DRX cycle) x $CSSF_{intra}$
NOTE 1: When DRX is not configured, $L_{PSS/SSS,gaps}$ is the number of SMTC occasions not available at the UE during $T_{PSS/SSS_sync_intra_CCA}$ for PSS/SSS detection, where $L_{PSS/SSS,gaps} < L_{PSS/SSS,gaps,max}$. When DRX is configured, $L_{PSS/SSS,gaps}$ is the number of DRX cycles in which at least one SMTC occasion is not available at the UE during $T_{PSS/SSS_sync_intra_CCA}$ for PSS/SSS detection, where $L_{PSS/SSS,gaps} < L_{PSS/SSS,gaps,max}$. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. When configured with measurement gaps, the UE is not required to determine the availability of SMTC occasions more frequent than once during	

	MGRP. FFS: The UE is not required to determine the availability of SMTC occasions more frequent than what is required by $CSSF_{intra}$.
NOTE 2:	$L_{PSS/SSS,gaps,max,}$ =7 for Max(DRX cycle, SMTC period, MGRP)≤40ms where DRX cycle is 0 for non-DRX, $L_{PSS/SSS,gaps,max}$ =5 for 40ms<Max(DRX cycle, SMTC period, MGRP)≤320ms, $L_{PSS/SSS,gaps,max}$ =3 for DRX cycle>320ms.
NOTE 3:	Upon exceeding $L_{PSS/SSS,gaps,max}$, the UE is not required to meet the requirements for PSS/SSS detection.

Table 9.2A.6.1-2: Time period for time index detection (FR1)

Condition	$T_{SSB_time_index_intra_CCA}$
No DRX	max(120ms, (3+$L_{ind,gaps}$) x max(MGRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(120ms, ceil(1.5x (3+$L_{ind,gaps}$)) x max(MGRP, SMTC period,DRX cycle) x $CSSF_{intra}$)
DRX cycle>320ms	(3+$L_{ind,gaps}$) x (MGRP, DRX cycle) x $CSSF_{intra}$
NOTE 1:	When DRX is not configured, $L_{ind,gaps}$ is the number of SMTC occasions not available at the UE during $T_{SSB_time_index_intra_CCA}$ for index detection where $L_{ind,gaps}$ < $L_{ind,gaps,max}$. When DRX is configured, $L_{ind,gaps}$ is the number of DRX cycles in which at least one SMTC occasion is not available at the UE during $T_{SSB_time_index_intra_CCA}$ for index detection where $L_{ind,gaps}$ < $L_{ind,gaps,max}$. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. When configured with measurement gaps, the UE is not required to determine the availability of SMTC occasions more frequent than once during MGRP. FFS: The UE is not required to determine the availability of SMTC occasions more frequent than what is required by $CSSF_{intra}$.
NOTE 2:	$L_{ind,gaps,max,}$ = 5 for Max(DRX cycle, SMTC period, MGRP)≤40ms where DRX cycle is 0 for non-DRX, $L_{ind,gaps,max}$ = 3 for 40ms<Max(DRX cycle, SMTC period, MGRP)≤320ms, $L_{ind,gaps,max}$ = 2 for DRX cycle>320ms.
NOTE 3:	Upon exceeding $L_{ind,gaps,max}$ over the $T_{SSB_time_index_intra_CCA}$ period of time, the UE has to restart the time index detection procedure.

Table 9.2A.6.1-3: Time period for PSS/SSS detection (FR2-2)

DRX cycle	$T_{PSS/SSS_sync_intra_CCA}$
No DRX	max(600ms, ($M_{pss/sss_sync_with_gaps_CCA}$ x K_{FR} + N x $L_{ind,gaps}$) x max(MGRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(600ms, ceil(1.5x ($M_{pss/sss_sync_with_gaps_CCA}$ x K_{FR} + N x $L_{ind,gaps}$)) x max(MGRP, SMTC period, DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	($M_{pss/sss_sync_with_gaps_CCA}$ x K_{FR} + N x $L_{ind,gaps}$) x max(MGRP, DRX cycle) x $CSSF_{intra}$
NOTE 1:	When DRX is not configured, $L_{ind,gaps}$ is the number of SMTC occasion groups not available at the UE during $T_{SSB_time_index_intra_CCA}$ for index detection where $L_{ind,gaps}$ < $L_{ind,gaps,max}$. A SMTC occasion group consists of N consecutive SMTC occasions. An SMTC occasion group is not available, when at least one SMTC occasion in the group is not transmitted by the gNB. When DRX is configured, $L_{ind,gaps}$ is the number of [DRX cycle groups] in which at least one SMTC occasion is not available at the UE during $T_{SSB_time_index_intra_CCA}$ for index detection where $L_{ind,gaps}$ < $L_{ind,gaps,max}$.[A DRX occasion group consists of N consecutive DRX cycles. A DRX occasion group occasion group is not available, when at least one SMTC occasion in the group is not transmitted by the gNB.] When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. When configured with measurement gaps, the UE is not required to determine the availability of SMTC occasions more frequent than once during MGRP.
NOTE 2:	$L_{ind,gaps,max,}$ = [5] for Max(DRX cycle, SMTC period, MGRP)≤40ms where DRX cycle is 0 for non-DRX, $L_{ind,gaps,max}$ = [3] for 40ms<Max(DRX cycle, SMTC period, MGRP)≤320ms, $L_{ind,gaps,max}$ = [2] for DRX cycle>320ms.
NOTE 3:	Upon exceeding $L_{ind,gaps,max}$ over the $T_{SSB_time_index_intra_CCA}$ period of time, the UE has to restart the time index detection procedure.
NOTE 4:	K_{FR} is a scaling factor depending on the frequency range and SSB SCS. K_{FR} = 1 if the SCS of the SSB of the cell being detected is 120 kHz, K_{FR} = 2 if the SCS of the SSB of the cell being detected is 480 kHz, and K_{FR} = 3 if the SCS of the SSB of the cell being detected is 960 kHz.

Table 9.2A.5.1-7: Time period for time index detection (FR2-2)

DRX cycle	$T_{SSB_time_index_intra_CCA}$

No DRX	$Max(200ms, ceil((M_{SSB_index_intra} + (L_{ind,gaps} \times N)) \times K_p) \times Max(MGRP, SMTC\ period)) \times CSSF_{intra}$
DRX cycle≤ 320ms	$Max(200ms, ceil(1.5 \times (M_{SSB_index_intra} + (L_{ind,gaps} \times N)) \times K_p) \times Max(MGRP, SMTC\ period, DRX\ cycle)) \times CSSF_{intra}$
DRX cycle> 320ms	$ceil((M_{SSB_index_intra} + (L_{ind,gaps} \times N)) \times K_p) \times DRX\ cycle \times CSSF_{intra}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified NOTE 2: When DRX is not configured, L_{ind} is the number of SMTC occasion groups not available at the UE during $T_{SSB_time_index_intra_CCA}$ for index detection, where $L_{ind,gaps} \leq L_{ind,gaps,max}$. When DRX is configured, $L_{ind,gaps}$ is the number of DRX cycles groups in which at least one SMTC occasion is not available at the UE during $T_{SSB_time_index_intra_CCA}$ for index detection, where $L_{ind,gaps} \leq L_{ind,gaps,max}$. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. NOTE 3: $L_{ind,gaps,max}$ = 5 for Max(DRX cycle,SMTC period)≤40ms where DRX cycle is 0 for non-DRX, $L_{ind,gaps,max}$ = 3 for 40ms<Max(DRX cycle,SMTC period)≤320ms, $L_{ind,max}$ =2 for DRX cycle>320ms. NOTE 4: Upon exceeding $L_{ind,gaps,max}$ over the period of time $T_{SSB_time_index_intra_CCA}$, the UE has to restart the time index detection procedure.	

9.2A.6.2 Intra-frequency Measurement Period

The measurement period for intra-frequency measurements with gaps is as shown in table 9.2A.6.2-1.

If MCG DRX is in use, intra-frequency cell identification requirements specified in Table 9.2A.6.2-1 and 9.2A.6.2-2 shall depend on the MCG DRX cycle. If SCG DRX is in use, intra-frequency measurement period requirements specified in Table 9.2A.6.2-1 and 9.2A.6.2-2 shall depend on the SCG DRX cycle. Otherwise, the requirements for when DRX is not in use shall apply.

The requirements apply provided any two closest SMTC occasions available at the UE for the measurement shall be separated by no more than the maximum time requirement for the cell to remain known defined in clause 9.2A.4.3.

When the time period of unsuccessful measurement attempts due to exceeding the maximum number of unavailable at the UE SMTC occasions of an already identified cell exceeds the maximum time requirement for the cell to remain known defined in clause 9.2A.4.3, UE shall stop the measurement attempts on this SSB and perform the detection procedure again like for any other SSB.

Table 9.2A.6.2-1: Measurement period for intra-frequency measurements with gaps (FR1)

Condition	$T_{SSB_measurement_period_intra_CCA}$
No DRX	$max(200ms, (5+L_{meas,gaps}) \times max(MGRP, SMTC\ period)) \times CSSF_{intra}$
DRX cycle≤ 320ms	$max(200ms, ceil(1.5 \times (5+L_{meas,gaps})) \times max(MGRP, SMTC\ period, DRX\ cycle)) \times CSSF_{intra}$
DRX cycle>320ms	$(5+L_{meas,gaps}) \times (MGRP, DRX\ cycle) \times CSSF_{intra}$
NOTE 1: When DRX is not configured, $L_{meas,gaps}$ is the number of SMTC occasions not available at the UE during $T_{SSB_time_index_intra_CCA}$ for measurement where $L_{meas,gaps} < L_{meas,gaps,max}$. When DRX is configured, $L_{meas,gaps}$ is the number of DRX cycles in which at least one SMTC occasion is not available at the UE during $T_{SSB_time_index_intra_CCA}$ for measurement where $L_{meas,gaps} < L_{meas,gaps,max}$. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. When configured with measurement gaps, the UE is not required to determine the availability of SMTC occasions more frequent than once during MGRP. FFS: The UE is not required to determine the availability of SMTC occasions more frequent than what is required by $CSSF_{intra}$. NOTE 2: $L_{meas,gaps,max}$ = 7 for Max(DRX cycle, SMTC period, MGRP)≤40ms where DRX cycle is 0 for non-DRX, $L_{meas,gaps,max}$ = 5 for 40ms<Max(DRX cycle, SMTC period, MGRP)≤320ms, $L_{meas,gaps,max}$ = 3 for DRX cycle>320ms. NOTE 3: Upon exceeding $L_{meas,gaps,max}$ over the $T_{SSB_measurement_period_intra_CCA}$ period of time, the UE has to restart the measurement procedure.	

Table 9.2A.6.2-2: Measurement period for intra-frequency measurements with gaps (FR2-2)

DRX cycle	$T_{SSB_measurement_period_intra_CCA}$

No DRX	max(400ms, ($M_{meas_period\ with_gaps_CCA}$ + N x $L_{meas,gaps}$) x max(MGRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(400ms, ceil(1.5 x ($M_{meas_period\ with_gaps_CCA}$ + N x $L_{meas,gaps}$)) x max(MGRP, SMTC period, DRX cycle)) Note 1 x $CSSF_{intra}$
DRX cycle>320ms	($M_{meas_period\ with_gaps_CCA}$ + N x $L_{meas,gaps}$) x max(MGRP, DRX cycle) x $CSSF_{intra}$
NOTE 1: When DRX is not configured, $L_{meas,gaps}$ is the number of SMTC occasion groups not available at the UE during $T_{SSB_time_index_intra_CCA}$ for measurement where $L_{meas,gaps} < L_{meas,gaps,max}$. A SMTC occasion group consists of N consecutive SMTC occasions. An SMTC occasion group is not available, when at least one SMTC occasion in the group is not transmitted by the gNB. When DRX is configured, $L_{meas,gaps}$ is the number of DRX cycle groups in which at least one SMTC occasion is not available at the UE during $T_{SSB_time_index_intra_CCA}$ for measurement where $L_{meas,gaps} < L_{meas,gaps,max}$. A DRX occasion group consists of N consecutive DRX cycles. A DRX occasion group occasion group is not available, when at least one SMTC occasion in the group is not transmitted by the gNB. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. When configured with measurement gaps, the UE is not required to determine the availability of SMTC occasions more frequent than once during MGRP. NOTE 2: $L_{meas,gaps,max}$ = 7 for Max(DRX cycle, SMTC period, MGRP)≤40ms where DRX cycle is 0 for non-DRX, $L_{meas,gaps,max}$ = 5 for 40ms<Max(DRX cycle, SMTC period, MGRP)≤320ms, $L_{meas,gaps,max}$ = 3 for DRX cycle>320ms. NOTE 3: Upon exceeding $L_{meas,gaps,max}$ over the $T_{SSB_measurement_period_intra_CCA}$ period of time, the UE has to restart the measurement procedure.	

9.2A.7 Intra-frequency RSSI and Channel occupancy measurements

9.2A.7.1 Intra-frequency RSSI measurements

An RSSI measurement is defined as an intra-frequency measurement provided that the RSSI measurement bandwidth is fully contained within the current carrier bandwidth of the UE.

The UE physical layer shall be capable of performing the RSSI measurements, defined in TS 38.215 [4] on one or more serving carriers operating with CCA, TS 37.213 [33], if the carrier(s) are indicated by higher layers [2], and report the RSSI measurements to higher layers. The UE physical layer shall provide to higher layers a single RSSI sample for each OFDM symbol within each configured RSSI measurement duration [2] occurring with a configured RSSI measurement timing configuration periodicity [2], *rmtc-Periodicity*.

The UE can perform RSSI measurements without measurement gaps if RSSI measurement bandwidth is fully within the active DL BWP of the UE.

For performing intra-frequency RSSI measurement in FR2-2, UE shall assume the configured RSSI measurement resources are QCL-ed with TypeD to the DL RS associated with the TCI state provided in the RMTC configuration. UE does not expect to be configured with an explicit TCI-state in RMTC-Config with a reference serving cell in FR1 or FR2-1. If no TCI state is provided in the RMTC configuration, UE shall assume the configured RSSI measurement resources are QCL-ed with TypeD to one of the latest received PDSCH and the latest monitored CORESET in the active BWP of the current carrier in FR2-2.

For RSSI measurement in FR2-2 with SCS of 480 kHz or 960 kHz, the RSSI measurement results shall be derived based on symbols configured by RMTC except for the first symbol and the last symbol in RMTC, and there is no requirement when *measDurationSymbols* is configured as 1.

The measurement period for intra-frequency RSSI measurements without measurement gaps is as shown in Table 9.2A.7.1-1 and Table 9.2A.7.1-2, for FR1, and in Table 9.2A.7.4-1 and Table 9.2A.7.5-1 for FR2-2. The measurement period for intra-frequency RSSI measurements with measurement gaps is as shown in Table 9.2A.7.1-3, for FR1 and in Table 9.2A.7.1-6 for FR2-2.

Table 9.2A.7.1-1: Measurement period for intra-frequency RSSI measurements without measurement gaps when SMTC and RMTC are overlapping (FR1)

Condition NOTE1,2	$T_{RSSI_measurement_period_intra_cca}$
No DRX	max(*reportInterval*, *rmtc-Periodicity**$CSSF_{outside_gap,i}$)
DRX	max(*reportInterval*, max(*rmtc-Periodicity*, DRX cycle) *$CSSF_{outside_gap,i}$)
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	

NOTE 2: $CSSF_{outside_gap,\ i}$ is a carrier specific scaling factor and is determined according to $CSSF_{outside_gap,i}$ in clause 9.1.5.1 for measurement conducted outside measurement gap.

Table 9.2A.7.1-2: Measurement period for intra-frequency RSSI measurements without measurement gaps when SMTC and RMTC are not overlapping (FR1)

Condition NOTE1,2	$T_{RSSI_measurement_period_intra_cca}$
No DRX	max(*reportInt*erval, $N_{intra-MO}$**rmtc-Periodicity*)
DRX	max(*reportInt*erval, $N_{intra-MO}$*max(*rmtc-Periodicity*, DRXcycle length))
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 NOTE 2: $N_{intra-MO}$ is defined as the number of measurement objects that can be measured without gaps	

Table 9.2A.7.1-3: Measurement period for intra-frequency RSSI measurements with measurement gaps (FR1)

Condition NOTE1,2	$T_{RSSI_measurement_period_intra_cca}$
No DRX	max(*reportInterval*, max(*rmtc-Periodicity, MGRP*) x $CSSF_{intra}$)
DRX	max(*reportInterval*, max(*rmtc-Periodicity*, MGRP,DRX cycle length) x $CSSF_{intra}$)
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 NOTE 2: $CSSF_{intra}$ is a carrier specific scaling factor and is determined according to $CSSF_{within_gap,i}$ in clause 9.1.5.2 for measurement conducted within measurement gaps.	

Table 9.2A.7.1-4: Measurement period for intra-frequency RSSI measurements without measurement gaps when SMTC and RMTC are overlapping (FR2-2)

Condition NOTE1,2	$T_{RSSI_measurement_period_intra_cca}$
No DRX	max(*reportInterval*, *rmtc-Periodicity**$CSSF_{outside_gap,i}$)
DRX	max(*reportInterval*, max(*rmtc-Periodicity*, DRX cycle) *$CSSF_{outside_gap,i}$)
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 NOTE 2: $CSSF_{outside_gap,\ i}$ is a carrier specific scaling factor and is determined according to $CSSF_{outside_gap,i}$ in clause 9.1.5.1 for measurement conducted outside measurement gap.	

Table 9.2A.7.1-5: Measurement period for intra-frequency RSSI measurements without measurement gaps when SMTC and RMTC are not overlapping (FR2-2)

Condition NOTE1,2	$T_{RSSI_measurement_period_intra_cca}$
No DRX	max(*reportInt*erval, $N_{intra-MO}$**rmtc-Periodicity*)
DRX	max(*reportInt*erval, $N_{intra-MO}$*max(*rmtc-Periodicity*, DRX cycle))
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 NOTE 2: $N_{intra-MO}$ is defined as the number of measurement objects that can be measured without gaps	

Table 9.2A.7.1-6: Measurement period for intra-frequency RSSI measurements with measurement gaps (FR2-2)

Condition NOTE1,2	$T_{RSSI_measurement_period_intra_cca}$
No DRX	max(*reportInterval*, max(*rmtc-Periodicity, MGRP*) x $CSSF_{intra}$)
DRX	max(*reportInterval*, max(*rmtc-Periodicity*, MGRP,DRX cycle) x $CSSF_{intra}$)
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 NOTE 2: $CSSF_{intra}$ is a carrier specific scaling factor and is determined according to $CSSF_{within_gap,i}$ in clause 9.1.5.2 for measurement conducted within measurement gaps.	

If the UE requires measurement gaps to perform intra-frequency measurements, a single measurement gap pattern is used for all concurrent intra-frequency measurements, including intra-frequency RSSI measurements. The RSSI measurement duration and the measurement gap should be aligned, and the following additional condition should be fulfilled:

- Entire RSSI measurement duration should be contained in the measurement gap.

The RSSI measurement performed and reported according to this clause shall meet the RSSI measurement accuracy requirement in Clause 10.1.34.1. The reported RSSI measurement values contained in measurement reports shall be based on the measurement report mapping requirements specified in Clause 10.1.34.3.

9.2A.7.2 Intra-frequency Channel occupancy measurements

The UE shall be capable of estimating the channel occupancy on one or more serving carrier frequencies indicated by higher layers [2], based on RSSI samples provided by the physical layer.

The UE can perform channel occupancy measurements without measurement gaps if RSSI measurement bandwidth is fully within the active DL BWP of the UE.

The measurement period for intra-frequency channel occupancy measurements without measurement gap is as shown in Table 9.2A.7.2-1 and Table 9.2A.7.1-2 for FR1, and in Table 9.2A.7.2-4 and Table 9.2A.7.1-5 for FR2-2. The measurement period for intra-frequency RSSI measurements with measurement gaps is as shown in Table 9.2A.7.2-3 for FR1, and in Table 9.2A.7.2-6 for FR2-2 .

Table 9.2A.7.2-1: Measurement period for intra-frequency Channel Occupancy measurements without measurement gaps when SMTC and RMTC are overlapping (FR1)

Condition NOTE1,2	$T_{RSSI_measurement_period_intra_cca}$
No DRX	max(*reportInterval*, *rmtc-Periodicity**$CSSF_{outside_gap,i}$)
DRX	max(*reportInterval*, max(*rmtc-Periodicity*, DRX cycle) *$CSSF_{outside_gap,i}$)
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 NOTE 2: $CSSF_{outside_gap,i}$ is a carrier specific scaling factor and is determined according to $CSSF_{within_gap,i}$ in clause 9.1.5.1 for measurement conducted outside measurement gap.	

Table 9.2A.7.2-2: Measurement period for intra-frequency Channel Occupancy measurements without measurement gaps when SMTC and RMTC are not overlapping (FR1)

Condition NOTE1,2	$T_{RSSI_measurement_period_intra_cca}$
No DRX	max(*reportInt*erval, $N_{intra-MO}$**rmtc-Periodicity*)
DRX	max(*reportInt*erval, $N_{intra-MO}$*max(*rmtc-Periodicity*, DRXcycle length))
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 NOTE 2: $N_{intra-MO}$ is defined as the number of measurement objects that can be measured without gaps	

Table 9.2A.7.2-3: Measurement period for intra-frequency Channel Occupancy measurements with measurement gaps (FR1)

Condition NOTE1,2	$T_{RSSI_measurement_period_intra_cca}$
No DRX	max(*reportInterval*, max(*rmtc-Periodicity, MGRP*) x $CSSF_{intra}$)
DRX	max(*reportInterval*, max(*rmtc-Periodicity*, MGRP,DRX cycle length) x $CSSF_{intra}$)
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 NOTE 2: $CSSF_{intra}$ is a carrier specific scaling factor and is determined according to $CSSF_{within_gap,i}$ in clause 9.1.5.2 for measurement conducted within measurement gaps.	

Table 9.2A.7.2-4: Measurement period for intra-frequency Channel Occupancy measurements without measurement gaps when SMTC and RMTC are overlapping (FR2-2)

Condition NOTE1,2	$T_{RSSI_measurement_period_intra_cca}$
No DRX	max(*reportInterval*, *rmtc-Periodicity**$CSSF_{outside_gap,i}$)
DRX	max(*reportInterval*, max(*rmtc-Periodicity*, DRX cycle) *$CSSF_{outside_gap,i}$)
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 NOTE 2: $CSSF_{outside_gap,i}$ is a carrier specific scaling factor and is determined according to $CSSF_{outside_gap,i}$ in clause 9.1.5.1 for measurement conducted outside measurement gap.	

Table 9.2A.7.2-5: Measurement period for intra-frequency Channel Occupancy measurements without measurement gaps when SMTC and RMTC are not overlapping (FR2-2)

Condition NOTE1,2	$T_{RSSI_measurement_period_intra_cca}$
No DRX	max(*reportInt*erval, $N_{intra-MO}$**rmtc-Periodicity*)
DRX	max(*reportInt*erval, $N_{intra-MO}$*max(*rmtc-Periodicity*, DRX cycle))
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 NOTE 2: $N_{intra-MO}$ is defined as the number of measurement objects that can be measured without gaps	

Table 9.2A.7.2-6: Measurement period for intra-frequency Channel Occupancy measurements with measurement gaps (FR2-2)

Condition NOTE1,2	$T_{RSSI_measurement_period_intra_cca}$
No DRX	max(*reportInterval*, max(*rmtc-Periodicity, MGRP*) x $CSSF_{intra}$)
DRX	max(*reportInterval*, max(*rmtc-Periodicity*, MGRP,DRX cycle) x $CSSF_{intra}$)
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 NOTE 2: $CSSF_{intra}$ is a carrier specific scaling factor and is determined according to $CSSF_{within_gap,i}$ in clause 9.1.5.2 for measurement conducted within measurement gaps.	

If the UE requires measurement gaps to perform intra-frequency measurements, a single measurement gap pattern is used for all concurrent intra-frequency measurements, including intra-frequency RSSI measurements. The RSSI measurement duration and the measurement gap should be aligned, and the following additional condition should be fulfilled:

- Entire RSSI measurement duration should be contained in the measurement gap.

The channel occupancy measurement performed and reported according to this clause shall meet the channel occupancy measurement accuracy requirements in Clause 10.1.35.1. The reported channel occupancy measurement values contained in measurement reports shall be based on the measurement reporting range specified in TS 38.331 [2].

9.2A.7.3 Scheduling restriction during RSSI and Channel Occupancy measurements in FR1

When the UE performs intra-frequency RSSI/CO measurements in unlicensed spectrum, the following restrictions apply due to RSSI/CO measurements:

- The UE is not expected to transmit PUCCH/PUSCH/SRS on UL symbols which are overlapping in time with the RSSI measurement symbols configured by RMTC.

When intra-band carrier aggregation in unlicensed spectrum is performed, the scheduling restrictions due to a given serving cell should also apply to all other serving cells in the same band on the symbols that fully or partially overlap with the aforementioned restricted symbols.

9.2A.7.4 Scheduling restriction during RSSI measurements in FR2-2

When the UE performs intra-frequency RSSI measurements in unlicensed spectrum, the following restrictions apply due to RSSI measurements:

- The UE is not expected to transmit PUCCH/PUSCH/SRS on UL symbols which are overlapping in time with the RSSI measurement symbols configured by RMTC.

- The UE is not expected to receive PDCCH/PDSCH/TRS/CSI-RS for CQI on symbols which are overlapping in time with RSSI measurement symbols configured by RMTC if the RSSI measurement resources are not QCL-ed with typeD to the DL RS in the active TCI state of PDCCH/PDSCH.

- For 480 kHz and 960 kHz, The UE is not expected to receive PDCCH/PDSCH/TRS/CSI-RS for CQI on symbols which are overlapping in time with the first and last RSSI measurement symbols configured by RMTC.

When intra-band carrier aggregation in unlicensed spectrum is performed, the scheduling restrictions due to a given serving cell should also apply to all other serving cells in the same band on the symbols that fully or partially overlap with the aforementioned restricted symbols.

9.2B NR intra-frequency measurements for RedCap

9.2B.1 Introduction

A measurement is defined as a SSB based intra-frequency measurement provided the centre frequency of the reference SSB of the serving cell and the centre frequency of the SSB of the neighbour cell are the same, and the subcarrier spacing of the two SSBs are also the same. The reference SSB is the SSB defined in BWP-specific *servingCellMO*

under *BWP-DownlinkDedicated* of active DL BWP. If the field is absent, the reference SSB is the SSB defined in *servingCellMO* under *ServingCellConfig* [2].

The UE shall be able to identify new intra-frequency cells and perform SS-RSRP, SS-RSRQ, and SS-SINR measurements of identified intra-frequency cells if carrier frequency information is provided by PCell, even if no explicit neighbour list with physical layer cell identities is provided.

The UE can perform intra-frequency SSB based measurements without measurement gaps if

- the SSB is completely contained in the active BWP of the UE, or
- the active downlink BWP is initial BWP [3].

For intra-frequency SSB based measurements without measurement gaps, UE may cause scheduling restriction as specified in clause 9.2B.5.3.

SSB based measurements are configured along with one or two measurement timing configuration(s) (SMTC(s)) which provides periodicity, duration and offset information on a window of up to 5ms where the measurements are to be performed. For intra-frequency connected mode measurements, up to two measurement window periodicities may be configured. A single measurement window offset and measurement duration are configured per intra-frequency measurement object.

When measurement gaps are needed, the UE is not expected to detect SSB which start earlier than the gap starting time + switching time, nor detect SSB which end later than the gap end – switching time. Switching time is 0.5ms for frequency range FR1 and 0.25ms for frequency range FR2.

9.2B.2 Requirements applicability

The requirements in clause 9.2B apply, provided:

- The cell being identified or measured is detectable.

An intra-frequency cell shall be considered detectable when for each relevant SSB:

- For 2Rx RedCap:
  - SS-RSRP related side conditions given in clauses 10.1.2 and 10.1.3 for FR1 and FR2, respectively, for a corresponding Band,
  - SS-RSRQ related side conditions given in clauses 10.1.7 and 10.1.8 for FR1 and FR2, respectively, for a corresponding Band,
  - SS-SINR related side conditions given in clauses 10.1.12 and 10.1.13 for FR1 and FR2, respectively, for a corresponding Band,
  - SSB_RP and SSB Ês/Iot according to Annex B.2.2 for a corresponding Band.
- For 1Rx RedCap:
  - SS-RSRP related side conditions given in clauses [x.y.z] and [x.y.z] for FR1 and FR2, respectively, for a corresponding Band,
  - SS-RSRQ related side conditions given in clauses [x.y.z] and [x.y.z] for FR1 and FR2, respectively, for a corresponding Band,
  - SS-SINR related side conditions given in clauses [x.y.z] and [x.y.z] for FR1 and FR2, respectively, for a corresponding Band,
  - SSB_RP and SSB Ês/Iot according to Annex [x.y.z] for a corresponding Band.

9.2B.3 Number of cells and number of SSB

9.2B.3.1 Requirements for FR1

For each intra-frequency layer, during each layer 1 measurement period, the UE shall be capable of performing SS-RSRP, SS-RSRQ, and SS-SINR measurements for at least:

- 8 identified cells, and
- 14 SSBs with different SSB index and/or PCI on the intra-frequency layer, where the number of SSBs in the serving cell is not smaller than the number of configured RLM-RS SSB resources.

9.2B.3.2 Requirements for FR2

For one single intra-frequency layer in a band, during each layer 1 measurement period, the UE shall be capable of performing SS-RSRP, SS-RSRQ, and SS-SINR measurements for at least:

- 6 identified cells, and
- 24 SSBs with different SSB index and/or PCI,

where this single intra-frequency layer shall be:

- PCC when UE is configured with SA NR operation mode with PCC in the band.

9.2B.4 Measurement Reporting Requirements

9.2B.4.1 Periodic Reporting

For 2Rx RedCap: The requirements in clause 9.2.4.1 shall apply.

For 1Rx RedCap: Reported RSRP, RSRQ, and RS-SINR measurements contained in periodic measurement reports shall meet the requirements in clauses 10.1.2.1 (RSRP for FR1), 10.1.3.1 (RSRP for FR2), 10.1.7.1 (RSRQ for FR1), 10.1.8.1 (RSRQ for FR2), 10.1.12.1 (RS-SINR for FR1) and 10.1.13.1 (RS-SINR for FR2).

9.2B.4.2 Event-triggered Periodic Reporting

For 2Rx RedCap: The requirements in clause 9.2.4.2 shall apply.

For 1Rx RedCap: Reported RSRP, RSRQ, and RS-SINR measurements contained in event-triggered periodic measurement reports shall meet the requirements in clauses 10.1.2.1 (RSRP for FR1), 10.1.3.1 (RSRP for FR2), 10.1.7.1 (RSRQ for FR1), 10.1.8.1 (RSRQ for FR2), 10.1.12.1 (RS-SINR for FR1) and 10.1.13.1 (RS-SINR for FR2).

The first report in event triggered periodic measurement reporting shall meet the requirements specified in clause 9.2B.4.3.

9.2B.4.3 Event Triggered Reporting

For 2Rx RedCap: The requirements in clause 9.2.4.3 shall apply.

For 1Rx RedCap: Reported RSRP, RSRQ, and RS-SINR measurements contained in event triggered measurement reports shall meet the requirements in clauses 10.1.2.1 (RSRP for FR1), 10.1.3.1 (RSRP for FR2), 10.1.7.1 (RSRQ for FR1), 10.1.8.1 (RSRQ for FR2), 10.1.12.1 (RS-SINR for FR1) and 10.1.13.1 (RS-SINR for FR2).

The UE shall not send any event triggered measurement reports as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: 2 x TTI_{DCCH}. This measurement reporting delay excludes a delay which caused by no UL resources being available for UE to send the measurement report on.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{identify\ intra\ with\ index_RedCap}$ or $T_{identify\ intra\ without\ index_RedCap}$ defined in clause 9.2B.5.1 or clause 9.2B.6.2. When L3 filtering is used an additional delay can be expected.

A cell is detectable only if at least one SSBs measured from the Cell being configured remains detectable during the time period $T_{identify_intra_without_index_RedCap}$ or $T_{identify_intra_with_index_RedCap}$ as defined in clause 9.2B.5.1 or clause 9.2B.6.2. If a cell which has been detectable at least for the time period $T_{identify\ intra\ without\ index_RedCap}$ or $T_{identify\ intra\ with\ index_RedCap}$ defined in clause 9.2B.5.1 or clause 9.2B.6.2 becomes undetectable for a period ≤ 5 seconds and then the cell becomes detectable again with the same spatial reception parameter and triggers an event, the event triggered measurement reporting delay shall be less than $T_{SSB_measurement_period_intra_RedCap}$ provided the timing to that cell has not changed more than $\pm 3200/2^{\mu} T_c$ while the measurement gap has not been available and L3 filtering has not been used, where μ is the SCS configuration as defined in clause 4.2 of TS 38.211 [3]. When L3 filtering is used, an additional delay can be expected.

9.2B.5 Intra-frequency measurements without measurement gaps for RedCap

9.2B.5.1 Intra-frequency cell identification

The UE shall be able to identify a new detectable intra-frequency cell within $T_{identify_intra_without_index_RedCap}$ if the UE is not indicated to report SSB based RRM measurement result with the associated SSB index(*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured), or the UE is indicated that the neighbour cell is synchronous with the serving cell (*deriveSSB-IndexFromCell* is enabled). Otherwise UE shall be able to identify a new detectable intra frequency cell within $T_{identify_intra_with_index_RedCap}$. The UE shall be able to identify a new detectable intra frequency SS block of an already detected cell within $T_{identify_intra_without_index_RedCap.}$ It is assumed that *deriveSSB-IndexFromCell* is always enabled for FR1 TDD and FR2.

$$T_{identify_intra_without_index_RedCap} = (T_{PSS/SSS_sync_intra_RedCap} + T_{SSB_measurement_period_intra_RedCap})\ ms$$

$$T_{identify_intra_with_index_RedCap} = (T_{PSS/SSS_sync_intra_RedCap} + T_{SSB_measurement_period_intra_RedCap} + T_{SSB_time_index_intra_RedCap})\ ms$$

Where:

$T_{PSS/SSS_sync_intra_RedCap}$: it is the time period used in PSS/SSS detection given in tables 9.2B.5.1-1, 9.2B.5.1-2, 9.2B.5.1-3.

$T_{SSB_time_index_intra_RedCap}$: it is the time period used to acquire the index of the SSB being measured given in tables 9.2B.5.1-4, 9.2B.5.1-5

$T_{SSB_measurement_period_intra_RedCap}$: equal to a measurement period of SSB based measurement given in table 9.2B.5.2-1, table 9.2B.5.2-2, table 9.2B.5.2-3.

$CSSF_{intra_RedCap}$: it is a carrier specific scaling factor and is determined

according to $CSSF_{outside_gap_RedCap,i}$ in clause 9.1A.5.1 for measurement conducted outside measurement gaps, i.e. when intra-frequency SMTC is fully non overlapping or partially overlapping with measurement gaps, or according to $CSSF_{within_gap_RedCap,i}$ in clause 9.1A.5.2 for measurement conducted within measurement gaps, i.e. when intra-frequency SMTC is fully overlapping with measurement gaps.

if the high layer in TS 38.331 [2] signalling of *smtc2* is configured, the assumed periodicity of intra-frequency SMTC occasions corresponds to the value of higher layer parameter *smtc2*; Otherwise the assumed periodicity of intra-frequency SMTC occasions corresponds to the value of higher layer parameter *smtc1*.

For 2Rx RedCap:

$M_{pss/sss_sync_w/o_gaps_RedCap}$: For a UE supporting FR2 power class 1 or 5, $M_{pss/sss_sync_w/o_gaps_RedCap}$ =40. For a UE supporting power class 2, $M_{pss/sss_sync_w/o_gaps_RedCap}$ =24. For a UE supporting FR2 power class 3, $M_{pss/sss_sync_w/o_gaps_RedCap}$ =24. For a UE supporting FR2 power class 4, $M_{pss/sss_sync_w/o_gaps_RedCap}$ =24, For a UE supporting FR2 power class 7, $M_{pss/sss_sync_w/o_gaps_RedCap}$ = 24.

$M_{meas_period_w/o_gaps_RedCap}$: For a UE supporting power class 1 or 5, $M_{meas_period_w/o_gaps_RedCap}$ =40. For a UE supporting FR2 power class 2, $M_{meas_period_w/o_gaps_RedCap}$ =24. For a UE supporting power class 3, $M_{meas_period_w/o_gaps_RedCap}$ =24. For a UE supporting power class 4, $M_{meas_period_w/o_gaps_RedCap}$ =24, For a UE supporting power class 7, $M_{meas_period_w/o_gaps_RedCap}$ = 24.

When intra-frequency SMTC is fully non overlapping with measurement gaps or intra-frequency SMTC is fully overlapping with MGs, Kp=1

When intra-frequency SMTC is partially overlapping with measurement gaps, Kp = 1/(1- (SMTC period /MGRP)), where SMTC period < MGRP. For calculation of Kp, if the high layer signalling (TS 38.331 [2]) of *smtc2* is configured, for cells indicated in the *pci-List* parameter in *smtc2*, the SMTC periodicity corresponds to the value of higher layer parameter *smtc2*; for the other cells, the SMTC periodicity corresponds to the value of higher layer parameter *smtc1*.

If the higher layer signaling in TS38.331 [2] signalling of *smtc2* is present and smtc1 is fully overlapping with measurement gaps and smtc2 is partially overlapping with measurement gaps, requirements are not specified for $T_{identify_intra_without_index_RedCap}$ or $T_{identify_intra_with_index_RedCap}$

For FR2,

$K_{layer1_measurement}$=1,

- if all of the reference signals configured for RLM, BFD, CBD or L1-RSRP for beam reporting on any FR2 serving frequency in the same band outside measurement gap are not fully overlapped by intra-frequency SMTC occasions, or

- if all of the reference signal configured for RLM, BFD, CBD or L1-RSRP for beam reporting on any FR2 serving frequency in the same band outside measurement gap and fully-overlapped by intra-frequency SMTC occasions are not overlapped with any of the SSB symbols and the RSSI symbols, and 1 symbol before each consecutive SSB symbols and the RSSI symbols, and 1 symbol after each consecutive SSB symbols and the RSSI symbols, given that *SSB-ToMeasure* and *SS-RSSI-Measurement* are configured, where SSB symbols are indicated by the union set of SSB-ToMeasure from all the configured measurement objects on the same serving carrier which can be merged. and RSSI symbols are indicated by *SS-RSSI-Measurement*;

  $K_{layer1_measurement}$=1.5, otherwise.

If the above-mentioned reference signal configured for L1-RSRP measurement is aperiodic CSI-RS resource, longer cell identification delay would be expected.

Table 9.2B.5.1-1: Time period for PSS/SSS detection, (Frequency range FR1) for 2Rx RedCap UE

DRX cycle	$T_{PSS/SSS_sync_intra_RedCap}$
No DRX	max(600ms, ceil(5 x K_p) x SMTC period)[Note 1] x $CSSF_{intra_RedCap}$
DRX cycle≤ 320ms	max(600ms, ceil(1.5 x 5 x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{intra_RedCap}$
DRX cycle>320ms	ceil(5 x K_p) x DRX cycle x $CSSF_{intra_RedCap}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

Table 9.2B.5.1-2: Time period for PSS/SSS detection, (Frequency range FR2) for 2Rx RedCap UE

DRX cycle	$T_{PSS/SSS_sync_intra_RedCap}$
No DRX	max(600ms, ceil($M_{pss/sss_sync_w/o_gaps_RedCap}$ x K_p x $K_{layer1_measurement}$) x SMTC period)[Note 1] x $CSSF_{intra_RedCap}$
DRX cycle≤ 320ms	max(600ms, ceil(1.5 x $M_{pss/sss_sync_w/o_gaps_RedCap}$ x K_p x $K_{layer1_measurement}$) x max(SMTC period,DRX cycle)) x $CSSF_{intra_RedCap}$
DRX cycle>320ms	ceil($M_{pss/sss_sync_w/o_gaps_RedCap}$ x K_p x $K_{layer1_measurement}$) x DRX cycle x $CSSF_{intra_RedCap}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

Table 9.2B.5.1-3: Time period for PSS/SSS detection, (Frequency range FR1) for 1Rx RedCap UE

DRX cycle	$T_{PSS/SSS_sync_intra_RedCap}$
No DRX	max(600ms, ceil(7 x K_p) x SMTC period)[Note 1] x $CSSF_{intra_RedCap}$
DRX cycle≤ 320ms	max(600ms, ceil(1.5 x 7 x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{intra_RedCap}$
DRX cycle>320ms	ceil(7 x K_p) x DRX cycle x $CSSF_{intra_RedCap}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

Table 9.2B.5.1-4: Time period for time index detection (FR1) for 2Rx RedCap UE

DRX cycle	$T_{SSB_time_index_intra_RedCap}$
No DRX	max(120ms, ceil(3 x K_p) x SMTC period)[Note 1] x $CSSF_{intra_RedCap}$
DRX cycle≤ 320ms	max(120ms, ceil (1.5 x 3 x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{intra_RedCap}$
DRX cycle>320ms	Ceil(3 x K_p) x DRX cycle x $CSSF_{intra_RedCap}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

Table 9.2B.5.1-5: Time period for time index detection (FR1) for 1Rx RedCap UE

DRX cycle	$T_{SSB_time_index_intra_RedCap}$
No DRX	max(160ms, ceil(6 x K_p) x SMTC period)[Note 1] x $CSSF_{intra_RedCap}$
DRX cycle≤ 320ms	max(160ms, ceil (1.5 x 6 x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{intra_RedCap}$
DRX cycle>320ms	Ceil(6 x K_p) x DRX cycle x $CSSF_{intra_RedCap}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

9.2B.5.2 Measurement period

The measurement period for intra-frequency measurements without gaps is as shown in table 9.2B.5.2-1, 9.2B.5.2-2, 9.2B.5.2-3.

If the higher layer signaling in TS38.331 [2] signalling of *smtc2* is present and smtc1 is fully overlapping with measurement gaps and smtc2 is partially overlapping with measurement gaps, requirements are not specified for $T_{SSB_measurement_period_intra_RedCap}$.

For FR2, a longer measurement period is allowed, if aperiodic CSI-RS resource is measured for L1-RSRP measurement on any FR2 serving frequency in the same band, and the CSI-RS resource is outside measurement gap and overlapped with any of the SSB symbols and the RSSI symbols, and 1 symbol before each consecutive SSB symbols and the RSSI symbols, and 1 symbol after each consecutive SSB symbols and the RSSI symbols. If *SSB-ToMeasure* or *SS-RSSI-Measurement* is configured, the SSB symbols are indicated by the union set of *SSB-ToMeasure* from all the configured measurement objects on the same band which can be merged and the RSSI symbols are indicated by *SS-RSSI-Measurement*.

Table 9.2B.5.2-1: Measurement period for intra-frequency measurements without gaps (FR1) for 2Rx RedCap UE

DRX cycle	$T_{SSB_measurement_period_intra_RedCap}$
No DRX	max(200ms, ceil(5 x K_p) x SMTC period)[Note 1] x $CSSF_{intra_RedCap}$
DRX cycle≤ 320ms	max(200ms, ceil(1.5x 5 x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{intra_RedCap}$
DRX cycle>320ms	ceil(5 x K_p) x DRX cycle x $CSSF_{intra_RedCap}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

Table 9.2B.5.2-2: Measurement period for intra-frequency measurements without gaps (FR2) for 2Rx RedCap UE

DRX cycle	$T_{SSB_measurement_period_intra_RedCap}$
No DRX	max(400ms, ceil($M_{meas_period_w/o_gaps_RedCap}$ x K_p x $K_{layer1_measurement}$) x SMTC period)[Note 1] x $CSSF_{intra_RedCap}$
DRX cycle≤ 320ms	max(400ms, ceil(1.5x $M_{meas_period_w/o_gaps_RedCap}$ x K_p x $K_{layer1_measurement}$) x max(SMTC period,DRX cycle)) x $CSSF_{intra_RedCap}$
DRX cycle>320ms	ceil($M_{meas_period_w/o_gaps_RedCap}$ xK_p x $K_{layer1_measurement}$) x DRX cycle x $CSSF_{intra_RedCap}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

Table 9.2B.5.2-3: Measurement period for intra-frequency measurements without gaps (FR1) for 1Rx RedCap UE

DRX cycle	$T_{SSB_measurement_period_intra_RedCap}$
No DRX	max([200]ms, ceil([5] x K_p) x SMTC period)[Note 1] x $CSSF_{intra_RedCap}$
DRX cycle≤ 320ms	max([200]ms, ceil(1.5x [5] x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{intra_RedCap}$
DRX cycle>320ms	ceil([5] x K_p) x DRX cycle x $CSSF_{intra_RedCap}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

9.2B.5.3 Scheduling availability of UE during intra-frequency measurements

UE shall be capable of measuring without measurement gaps when the SSB is completely contained in the active bandwidth part of the UE. When any of the conditions in the following clauses is met, there are restrictions on the scheduling availability; otherwise, there is no scheduling restriction. Note that the SSB symbols indicated by the union set of SSB-ToMeasure from all the configured measurement objects on the same serving carrier which can be merged [2], if it is configured; otherwise, all *L* SSB symbols within the SMTC window duration defined in clause 4.1 of TS 38.213 [3] are included.

9.2B.5.3.1 Scheduling availability of UE performing measurements in TDD bands on FR1

When the UE performs intra-frequency measurements in a TDD band, the following restrictions apply due to SS-RSRP or SS-SINR measurement

- The UE is not expected to transmit PUCCH/PUSCH/SRS on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration. If the high layer in TS 38.331 [2] signalling of *smtc2* is configured, the SMTC periodicity follows *smtc2*; Otherwise SMTC periodicity follows *smtc1*.

When the UE performs intra-frequency measurements in a TDD band, the following restrictions apply due to SS-RSRQ measurement

- The UE is not expected to transmit PUCCH/PUSCH/SRS on SSB symbols to be measured, RSSI measurement symbols, and on 1 data symbol before each consecutive SSB to be measured/RSSI symbols and 1 data symbol after each consecutive SSB to be measured/RSSI symbols within SMTC window duration. If the high layer signalling of *smtc2* is configured in TS 38.331 [2], the SMTC periodicity follows *smtc2*; Otherwise the SMTC periodicity follows *smtc1*.

9.2B.5.3.2 Scheduling availability of UE performing measurements with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UE which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to SS-RSRP/RSRQ/SINR measurement

- If *deriveSSB_IndexFromCell* is enabled the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration. If the high layer signalling of *smtc2* is configured in TS 38.331 [2], the SMTC periodicity follows *smtc2*; Otherwise the SMTC periodicity follows *smtc1*.

- If *deriveSSB_IndexFromCell* is not enabled the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on all symbols within SMTC window duration. If the high layer signalling of *smtc2* is configured in TS 38.331 [2], the SMTC periodicity follows *smtc2*; Otherwise the SMTC periodicity follows *smtc1*.

- If the following conditions are met:

  - The UE has been notified about system information update through paging,

  - The gap between the UE's reception of PDCCH that UE monitors in the Type 2-PDCCH CSS set that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots

- The UE is expected to receive the PDCCH that the UE monitors in the Type0-PDCCH CSS set, and/or the corresponding PDSCH, on SSB symbols to be measured.

9.2B.5.3.3 Scheduling availability of UE performing measurements on FR2

The following scheduling restriction applies due to SS-RSRP or SS-SINR measurement on an FR2 intra-frequency cell

> The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration (The signaling *deriveSSB_IndexFromCell* is always enabled for FR2). If the high layer signalling of *smtc2* is configured in TS 38.331 [2], the SMTC periodicity follows *smtc2*; Otherwise the SMTC periodicity follows *smtc1*.

The following scheduling restriction applies to SS-RSRQ measurement on an FR2 intra-frequency cell

- The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on SSB symbols to be measured, RSSI measurement symbols, and on 1 data symbol before each consecutive SSB to be measured/RSSI symbols and 1 data symbol after each consecutive SSB to be measured/RSSI symbols within SMTC window duration (The signaling *deriveSSB_IndexFromCellc* is always enabled for FR2). If the high layer signalling of *smtc2* is configured in TS 38.331 [2], the SMTC periodicity follows *smtc2*; Otherwise the SMTC periodicity follows *smtc1*.

If following conditions are met:

- The UE has been notified about system information update through paging,

- The gap between the UE's reception of PDCCH that UE monitors in the Type 2-PDCCH CSS set that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots.

For the SSB and CORESET for RMSI scheduling multiplexing patterns 3, the UE is expected to receive the PDCCH that the UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured; and

For the SSB and CORESET for RMSI scheduling multiplexing patterns 2, the UE is expected to receive PDSCH that corresponds to the PDCCH that the UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured.

9.2B.5.3.4 Scheduling availability of UE performing measurements in HD-FDD bands on FR1

When the UE performs intra-frequency measurements in a HD-FDD band, the following restrictions apply due to SS-RSRP or SS-SINR measurement

- The UE is not expected to transmit PUCCH/PUSCH/SRS on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration. If the high layer in TS 38.331 [2] signalling of *smtc2* is configured, the SMTC periodicity follows *smtc2*; Otherwise SMTC periodicity follows *smtc1*.

When the UE performs intra-frequency measurements in a HD-FDD band, the following restrictions apply due to SS-RSRQ measurement

- The UE is not expected to transmit PUCCH/PUSCH/SRS on SSB symbols to be measured, RSSI measurement symbols, and on 1 data symbol before each consecutive SSB to be measured/RSSI symbols and 1 data symbol after each consecutive SSB to be measured/RSSI symbols within SMTC window duration. If the high layer signalling of *smtc2* is configured in TS 38.331 [2], the SMTC periodicity follows *smtc2*; Otherwise the SMTC periodicity follows *smtc1*.

9.2B.6 Intra-frequency measurements with measurement gaps

9.2B.6.1 Intra-frequency cell identification

The UE shall be able to identify a new detectable intra frequency cell within $T_{identify_intra_without_index_RedCap}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured), or the UE has been indicated that the neighbour cell is synchronous with the serving cell (*deriveSSB-IndexFromCell* is enabled). Otherwise UE shall be able to identify a new detectable intra frequency cell within $T_{identify_intra_with_index_RedCap}$. The UE shall be able to identify a new detectable intra frequency SS block of an already detected cell within $T_{identify_intra_without_index_RedCap}$. It is assumed that *deriveSSB-IndexFromCell* is always enabled for FR1 TDD and FR2.

$$T_{identify_intra_without_index_RedCap} = T_{PSS/SSS_sync_intra_RedCap} + T_{SSB_measurement_period_intra_RedCap} \text{ ms}$$

$$T_{identify_intra_with_index_RedCap} = T_{PSS/SSS_sync_intra_RedCap} + T_{SSB_measurement_period_intra_RedCap} + T_{SSB_time_index_intra_RedCap} \text{ ms}$$

Where:

$T_{PSS/SSS_sync_intra_RedCap}$: it is the time period used in PSS/SSS detection given in table 9.2B.6.1-1 or 9.2B.6.1-2 or 9.2B.6.1-3.

$T_{SSB_time_index_intra_RedCap}$: it is the time period used to acquire the index of the SSB being measured given in table 9.2B.6.1-4 or 9.2B.6.1-5.

$T_{SSB_measurement_period_intra_RedCap}$: equal to a measurement period of SSB based measurement given in table 9.2B.6.2-1 or 9.2B.6.2-2 or 9.2B.6.2-3.

$CSSF_{intra_RedCap}$: it is a carrier specific scaling factor and is determined according to $CSSF_{within_gap_RedCap,i}$ in clause 9.1A.5.2 for measurement conducted within measurement gaps.

For 2Rx RedCap:

$M_{pss/sss_sync_with_gaps_RedCap}$: For a UE supporting FR2 power class 1 or 5, $M_{pss/sss_sync\ with_gaps_RedCap}$ =40. For a UE supporting FR2 power class 2, $M_{pss/sss_sync\ with_gaps_RedCap}$ =24. For a UE supporting FR2 power class 3, $M_{pss/sss_sync\ with_gaps_RedCap}$ =24. For a UE supporting power class 4, $M_{pss/sss_sync\ with_gaps_RedCap}$ =24, For a UE supporting FR2 power class 7, $M_{pss/sss_sync\ with_gaps_RedCap}$ =24.

$M_{meas_period_\ with_gaps_RedCap}$: For a UE supporting power class 1 or 5, $M_{meas_period_\ with_gaps_RedCap}$ =40. For a UE supporting power class 2, $M_{meas_period_\ with_gaps_RedCap}$ =24. For a UE supporting power class 3, $M_{meas_period_\ with_gaps_RedCap}$ =24. For a UE supporting power class 4, $M_{meas_period\ with_gaps_RedCap}$ =24, For a UE supporting power class 7, $M_{meas_period_\ with_gaps_RedCap}$ =24.

If the higher layer signaling in TS 38.331 [2] of *smtc2* is present and smtc1 is fully overlapping with measurement gaps and smtc2 is partially overlapping with measurement gaps, requirements are not specified for $T_{identify_intra_without_index_RedCap}$ or $T_{identify_intra_with_index_RedCap}$.

Table 9.2B.6.1-1: Time period for PSS/SSS detection (FR1) for 2Rx RedCap UE

DRX cycle	$T_{PSS/SSS_sync_intra_RedCap}$
No DRX	max(600ms, 5 x max(MGRP, SMTC period)) x $CSSF_{intra_RedCap}$
DRX cycle≤ 320ms	max(600ms, ceil(1.5 x 5) x max(MGRP, SMTC period,DRX cycle)) x $CSSF_{intra_RedCap}$
DRX cycle>320ms	5 x max(MGRP, DRX cycle) x $CSSF_{intra_RedCap}$

Table 9.2B.6.1-2: Time period for PSS/SSS detection (FR2) for 2Rx RedCap UE

DRX cycle	$T_{PSS/SSS_sync_intra_RedCap}$
No DRX	max(600ms, $M_{pss/sss_sync_with_gaps_RedCap}$ x max(MGRP, SMTC period)) x $CSSF_{intra_RedCap}$
DRX cycle≤ 320ms	max(600ms, ceil(1.5x $M_{pss/sss_sync_with_gaps_RedCap}$) x max(MGRP, SMTC period, DRX cycle)) x $CSSF_{intra_RedCap_RedCap}$
DRX cycle>320ms	$M_{pss/sss_sync_with_gaps_RedCap}$ x max(MGRP, DRX cycle) x $CSSF_{intra_RedCap}$

Table 9.2B.6.1-3: Time period for PSS/SSS detection (FR1) for 1Rx RedCap UE

DRX cycle	$T_{PSS/SSS_sync_intra_RedCap}$
No DRX	max(600 ms, 7 x max(MGRP, SMTC period)) x $CSSF_{intra_RedCap}$
DRX cycle≤ 320ms	max(600 ms, ceil(1.5 x 7) x max(MGRP, SMTC period,DRX cycle)) x $CSSF_{intra_RedCap}$
DRX cycle>320ms	7 x max(MGRP, DRX cycle) x $CSSF_{intra_RedCap}$

Table 9.2B.6.1-4: Time period for time index detection (Frequency range FR1) for 2Rx RedCap UE

DRX cycle	$T_{SSB_time_index_intra_RedCap}$
No DRX	max(120ms, 3 x max(MGRP, SMTC period)) x $CSSF_{intra_RedCap}$
DRX cycle≤ 320ms	max(120ms, ceil(1.5 x 3) x max(MGRP, SMTC period,DRX cycle) x $CSSF_{intra_RedCap}$)
DRX cycle>320ms	3 x max(MGRP, DRX cycle) x $CSSF_{intra_RedCap}$

Table 9.2B.6.1-5: Time period for time index detection (Frequency range FR1) for 1Rx RedCap UE

DRX cycle	$T_{SSB_time_index_intra_RedCap}$
No DRX	max(160ms, 6 x max(MGRP, SMTC period)) x $CSSF_{intra_RedCap}$
DRX cycle≤ 320ms	max(160ms, ceil(1.5 x 6) x max(MGRP, SMTC period,DRX cycle) x $CSSF_{intra_RedCap}$)
DRX cycle>320ms	[6] x max(MGRP, DRX cycle) x $CSSF_{intra_RedCap}$

9.2B.6.2 Intra-frequency Measurement Period

The measurement period for FR1 intra-frequency measurements with gaps is as shown in table 9.2B.6.2-1 and in table 9.2B.6.2-3 for 1 Rx RedCap.

The measurement period for FR2 intra-frequency measurements with gaps is as shown in table 9.2B.6.2-2.

For either an FR1 or FR2 serving cell, longer measurement period would be expected during the period $T_{identify_CGI_RedCap}$ when the UE is requested to decode an NR CGI.

Table 9.2B.6.2-1: Measurement period for intra-frequency measurements with gaps (FR1) for 2Rx RedCap UE

DRX cycle	$T_{SSB_measurement_period_intra_RedCap}$
No DRX	max(200ms, 5 x max(MGRP, SMTC period)) x $CSSF_{intra_RedCap}$
DRX cycle≤ 320ms	max(200ms, ceil(1.5x 5) x max(MGRP, SMTC period,DRX cycle)) x $CSSF_{intra_RedCap}$
DRX cycle>320ms	5 x max(MGRP, DRX cycle) x $CSSF_{intra_RedCap}$

Table 9.2B.6.2-2: Measurement period for intra-frequency measurements with gaps (FR2) for 2Rx RedCap UE

DRX cycle	$T_{SSB_measurement_period_intra_RedCap}$
No DRX	max(400ms, $M_{meas_period\ with_gaps_RedCap}$ x max(MGRP, SMTC period)) x $CSSF_{intra_RedCap}$
DRX cycle≤ 320ms	max(400ms, ceil(1.5 x $M_{meas_period\ with_gaps_RedCap}$) x max(MGRP, SMTC period, DRX cycle)) Note 1 x $CSSF_{intra_RedCap}$
DRX cycle>320ms	$M_{meas_period\ with_gaps_RedCap}$ x max(MGRP, DRX cycle) x $CSSF_{intra_RedCap}$

Table 9.2B.6.2-3: Measurement period for intra-frequency measurements with gaps (FR1) for 1Rx RedCap UE

DRX cycle	$T_{SSB_measurement_period_intra_RedCap}$
No DRX	max([200] ms, [5] x max(MGRP, SMTC period)) x $CSSF_{intra_RedCap}$
DRX cycle≤ 320ms	max([200] ms, ceil(1.5x [5]) x max(MGRP, SMTC period,DRX cycle)) x $CSSF_{intra_RedCap}$
DRX cycle>320ms	[5] x max(MGRP, DRX cycle) x $CSSF_{intra_RedCap}$

9.2C NR intra-frequency measurements for SAN

9.2C.1 Introduction

The requirements in clause 9.2C apply for intra-frequency measurements on an SAN carrier frequency. The requirements apply provided that valid parameters of ephemeris information, epoch time of the ephemeris, common TA, validity timer information, downlink polarization information for target NR SAN cell are send to UE.

A measurement is defined as a SSB based intra-frequency measurement provided the centre frequency of the SSB of the serving cell indicated for measurement and the centre frequency of the SSB of the neighbour cell are the same, and the subcarrier spacing of the two SSBs are also the same.

The UE shall be able to identify new intra-frequency cells and perform SS-RSRP, SS-RSRQ, and SS-SINR measurements of identified intra-frequency cells if carrier frequency information is provided by PCell, even if no explicit neighbour list with physical layer cell identities is provided.

The UE can perform intra-frequency SSB based measurements without measurement gaps if

- the UE indicates ‘no-gap’ via *intraFreq-needForGap* for intra-frequency measurement, or
- the SSB is completely contained in the active BWP of the UE, or
- the active downlink BWP is initial BWP[3].

For intra-frequency SSB based measurements without measurement gaps, UE may cause scheduling restriction as specified in clause 9.2C.5.3.

SSB based measurements are configured along with one or more measurement timing configuration(s) (SMTC(s)) which provides periodicity, duration and offset information on a window of up to 5ms where the measurements are to be performed. For intra-frequency connected mode measurements,

- when *SSB-MTC4List-r17* is not configured, up to two measurement window periodicities may be configured with *SSB-MTC* and *SSB-MTC2*

- when *SSB-MTC4List-r17* is configured, multiple measurement window offsets may be configured with *SSB-MTC* and *SSB-MTC4List-r17*, and the requriements in 9.2C apply provided that the total number of measurement window offsets does not exceed the UE capability [TBD]

When measurement gaps are needed, the UE is not expected to detect SSB which start earlier than the gap starting time + switching time, nor detect SSB which end later than the gap end – switching time. Switching time is 0.5ms for frequency range FR1.

9.2C.2 Requirements applicability

The requirements in clause 9.2C apply, provided:

- The cell being identified or measured is detectable.

- Valid information for the satellite serving the target cell has been provided- The number of configured SMTCs is no greater than [UE capability]

An intra-frequency cell shall be considered detectable when for each relevant SSB:

- SS-RSRP related side conditions given in clauses 10.1.2C for FR1, for a corresponding Band,

- SS-RSRQ related side conditions given in clauses 10.1.7C for FR1, for a corresponding Band,

- SS-SINR related side conditions given in clauses 10.1.12C for FR1, for a corresponding Band,

- SSB_RP and SSB Ês/Iot according to Annex B.2.2 for a corresponding Band.

9.2C.3 Number of cells and number of SSB

9.2C.3.1 Requirements for FR1

For each intra-frequency layer, during each layer 1 measurement period, the UE shall be capable of performing SS-RSRP, SS-RSRQ, and SS-SINR measurements for at least:

- 8 SSBs with different SSB index and/or PCI on the intra-frequency layer, where the number of SSBs in the serving cell (except for the SCell) is not smaller than the number of configured RLM-RS SSB resources.

- 4 SSBs with different SSB index and/or PCI from neighbour cells in GEO deployment.

- cells from 2 satellites including the satellite serving the PCell if UE does not support capability [TBD], cells from [4] satellites including the satellite serving the PCell, in LEO deployments

9.2C.4 Measurement Reporting Requirements

9.2C.4.1 Periodic Reporting

Reported RSRP, RSRQ, and RS-SINR measurements contained in periodic measurement reports shall meet the requirements in clauses TBD (RSRP for FR1), TBD (RSRQ for FR1) and TBD (RS-SINR for FR1).

9.2C.4.2 Event-triggered Periodic Reporting

Reported RSRP, RSRQ, and RS-SINR measurements contained in event-triggered periodic measurement reports shall meet the requirements in clauses TBD (RSRP for FR1), TBD (RSRQ for FR1) and TBD (RS-SINR for FR1)..

The first report in event triggered periodic measurement reporting shall meet the requirements specified in clause 9.2C.4.3.

9.2C.4.3 Event Triggered Reporting

Reported RSRP, RSRQ, and RS-SINR measurements contained in event triggered measurement reports shall meet the requirements in clauses TBD (RSRP for FR1), TBD (RSRQ for FR1) and TBD (RS-SINR for FR1)..

The UE shall not send any event triggered measurement reports as long as no reporting criteria is fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: 2 x TTI_{DCCH}. This measurement reporting delay excludes a delay which caused by no UL resources being available for UE to send the measurement report on.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{identify\ intra\ with\ index}$ or $T_{identify\ intra\ without\ index}$ defined in clause 9.2C.5.1 or clause 9.2C.6.2. When L3 filtering is used an additional delay can be expected.

A cell is detectable only if at least one SSBs measured from the Cell being configured remains detectable during the time period $T_{identify_intra_without_index}$ or $T_{identify_intra_with_index}$ as defined in clause 9.2C.5.1 or clause 9.2C.6.2. When L3 filtering is used, an additional delay can be expected.

9.2C.5 Intra frequency measurements without measurement gaps

9.2C.5.1 Intra frequency cell identification

The UE shall be able to identify a new detectable intra-frequency cell within $T_{identify_intra_without_index}$ if the UE is not indicated to report SSB based RRM measurement result with the associated SSB index(*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured), or the UE is indicated that the neighbour cell is synchronous with the serving cell (*deriveSSB-IndexFromCell* is enabled). Otherwise UE shall be able to identify a new detectable intra frequency cell within $T_{identify_intra_with_index}$. The UE shall be able to identify a new detectable intra frequency SS block of an already detected cell within $T_{identify_intra_without_index}$.

$$T_{identify_intra_without_index} = (T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra})\ ms$$

$$T_{identify_intra_with_index} = (T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra} + T_{SSB_time_index_intra})\ ms$$

Where:

T_{PSS/SSS_sync_intra}: it is the time period used in PSS/SSS detection given in table 9.2C.5.1-1

$T_{SSB_time_index_intra}$: it is the time period used to acquire the index of the SSB being measured given in table 9.2C.5.1-2

$T_{SSB_measurement_period_intra}$: equal to a measurement period of SSB based measurement given in table 9.2C.5.2-1

K_{multi_SMTC} is the scaling factor for measurement of multiple SMTCs or multiple satellites, and

if SMTCs do not overlap with each other,

- $K_{multi_SMTC} = 1$, if GEO satellites are measured on the carrier;

- $K_{multi_SMTC} = \left\lceil \frac{N_{LEO,i}}{N_{LEO,simul}} \right\rceil$, if LEO satellites are measured on the carrier;

if SMTCs partially overlap with each other,

- $K_{multi_SMTC} = N_{SMTC,overlap}$, if only GEO satellites are measured on the carrier;

- $K_{multi_SMTC} = \sum_{i=1}^{N_{SMTC,overlap}} \left\lceil \frac{N_{LEO,i}}{N_{LEO,simul}} \right\rceil$, if only LEO satellites are measured on the carrier;

where

- $N_{LEO,i}$ is the number of LEO satellites to be measured within i-th SMTC,

- $N_{LEO,simul}$ is the number of LEO satellites that UE can measure in parallel within an SMTC,

- $N_{SMTC,overlap}$ is the number of SMTCs that partially overlap with each other.

$CSSF_{intra}$: it is a carrier specific scaling factor and is determined

according to $CSSF_{outside_gap,i}$ in clause 9.1.5.1 for measurement conducted outside measurement gaps, i.e. when intra-frequency SMTC is fully non overlapping or partially overlapping with measurement gaps, or according to $CSSF_{within_gap,i}$ in clause 9.1.5.2 for measurement conducted within measurement gaps, i.e. when intra-frequency SMTC is fully overlapping with measurement gaps.

if the high layer in TS 38.331 [2] signalling of *smtc2* is configured, the assumed periodicity of intra-frequency SMTC occasions corresponds to the value of higher layer parameter *smtc2*; Otherwise the assumed periodicity of intra-frequency SMTC occasions corresponds to the value of higher layer parameter *smtc1*.

K_p is the scaling factor for an SSB frequency layer to be measured without measurement gaps. $K_p = N_{total_SAN} / N_{available_SAN}$, where $N_{available_SAN}$ and N_{total_SAN} are calculated as follows:

- For a window W of duration max(SMTC period, MGRP_max), where

  - If UE supports *parallelMeasurementGap-r17* and is configured with concurrent measurement gaps, MGRP max is the maximum MGRP across all configured per-UE measurement gap. Otherwise, MGRP max is the MGRP of configured measurement gap.

  - Starting from the beginning of any SMTC occasion:

    - N_{total_SAN} is the total number of SMTC occasions within the window, including those overlapped and non-overlapped with measurement gap occasions within the window, and

    - $N_{available_SAN}$ is the number of SMTC occasions within the window W that don't collide with any non-dropped MG occasion within or outside the window W, after accounting for measurement gap collisions by applying the measurement gap collision rule in section 9.1C.8.3. The collision rule between SMTC occasion and measurement gap occasion is defined in section 9.1C.9.1

K_p = [1] when $N_{available_SAN}$ = 0 and measurement gap sharing in clause 9.1.2.1a shall apply.

K_p = 1 when intra-frequency SMTC is fully non overlapping with measurement gaps.

For calculation of Kp, if the high layer signalling (TS 38.331 [2]) of *smtc2* is configured, for cells indicated in the *pci-List* parameter in *smtc2*, the SMTC periodicity corresponds to the value of higher layer parameter *smtc2*; for the other cells, the SMTC periodicity corresponds to the value of higher layer parameter *smtc1*.

$K_{layer1_measurement}$: it is scaling factor for sharing between L3 and L1 measurement, and $K_{layer1_measurement}$ =1, if GEO satellites are measured on the carrier, or if LEO satellites are measured on the carrier and UE supports *parallelMeasurementWithoutRestriction*, otherwise

$K_{layer1_measurement}$ =1,

- if all of the reference signals configured for RLM, BFD, CBD or L1-RSRP for beam reporting outside measurement gap are not fully overlapped by intra-frequency SMTC occasions, or

- if all of the reference signal configured for RLM, BFD, CBD or L1-RSRP for beam reporting outside measurement gap and fully-overlapped by intra-frequency SMTC occasions are not overlapped with any of the SSB symbols and the RSSI symbols, and 1 symbol before each consecutive SSB symbols and the RSSI symbols, and 1 symbol after each consecutive SSB symbols and the RSSI symbols, given that *SSB-ToMeasure* and *SS-RSSI-Measurement* are configured, and RSSI symbols are indicated by *SS-RSSI-Measurement*;

$K_{layer1_measurement}$ =1.5, otherwise.

If the above-mentioned reference signal configured for L1-RSRP measurement is aperiodic CSI-RS resource, longer cell identification delay would be expected.

If the higher layer signaling in TS38.331 [2] signalling of *smtc2* is present and smtc1 is fully overlapping with measurement gaps and smtc2 is partially overlapping with measurement gaps, requirements are not specified for $T_{identify_intra_without_index}$ or $T_{identify_intra_with_index}$

Table 9.2C.5.1-1: Time period for PSS/SSS detection, (Frequency range FR1)

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	max(600ms, ceil(5 x K_p x $K_{layer1_measurement}$) x K_{multi_SMTC} x SMTC period)[Note 1] x $CSSF_{intra}$
DRX cycle≤ 320ms	max(600ms, ceil(1.5 x 5 x K_p x $K_{layer1_measurement}$) x K_{multi_SMTC} x max(SMTC period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	ceil(5 x K_p x $K_{layer1_measurement}$) x K_{multi_SMTC} x DRX cycle x $CSSF_{intra}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

Table 9.2C.5.1-2: Time period for time index detection (FR1)

DRX cycle	$T_{SSB_time_index_intra}$
No DRX	max(120ms, ceil(3 x K_p x $K_{layer1_measurement}$) x K_{multi_SMTC} x SMTC period)[Note 1] x $CSSF_{intra}$
DRX cycle≤ 320ms	max(120ms, ceil (1.5 x 3 x K_p x $K_{layer1_measurement}$) x K_{multi_SMTC} x max(SMTC period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	Ceil(3 x K_p x $K_{layer1_measurement}$) x K_{multi_SMTC} x DRX cycle x $CSSF_{intra}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

The requirements in clause 9.2C.5.1 and 9.2C.5.2 are not applicable when the overall overhead ratio due to scheduling restriction caused by all configured SMTCs (i.e. scheduling restriction overhead of all SMTCs in one SMTC periodicity), is larger than 75%.

9.2C.5.2 Measurement period

The measurement period for intra-frequency measurements without gaps is as shown in table 9.2C.5.2-1.

If the higher layer signaling in TS38.331 [2] signalling of *smtc2* is present and smtc1 is fully overlapping with measurement gaps and smtc2 is partially overlapping with measurement gaps, requirements are not specified for $T_{SSB_measurement_period_intra}$

Table 9.2C.5.2-1: Measurement period for intra-frequency measurements without gaps (FR1)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	max(200ms, ceil(5 x K_p x $K_{layer1_measurement}$) x K_{multi_SMTC} x SMTC period)[Note 1] x $CSSF_{intra}$
DRX cycle≤ 320ms	max(200ms, ceil(1.5x 5 x K_p x $K_{layer1_measurement}$) x K_{multi_SMTC} x max(SMTC period,DRX cycle)) x $CSSF_{intra}$

DRX cycle>320ms	ceil(5 x K_p x $K_{layer1_measurement}$) x K_{multi_SMTC} x DRX cycle x $CSSF_{intra}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

9.2C.5.3 Scheduling availability of UE during intra-frequency measurements

When any of the conditions in the following clauses is met, there are restrictions on the scheduling availability; otherwise, there is no scheduling restriction. Note that the SSB symbols indicated by the union set of SSB-ToMeasure from all the configured measurement objects on the same serving carrier which can be merged [2], if it is configured; otherwise, all *L* SSB symbols within the SMTC window duration defined in clause 4.1 of TS 38.213 [3] are included.

9.2C.5.3.1 Scheduling availability of UE performing measurements with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UE which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to SS-RSRP/RSRQ/SINR measurement

- If *deriveSSB_IndexFromCell* is enabled the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration. If the high layer signalling of *smtc2* is configured(in TS 38.331 [2]), the SMTC periodicity follows *smtc2*; Otherwise the SMTC periodicity follows *smtc1*.

- If *deriveSSB_IndexFromCell* is not enabled the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on all symbols within SMTC window duration. If the high layer signalling of *smtc2* is configured in TS 38.331 [2], the SMTC periodicity follows *smtc2*; Otherwise the SMTC periodicity follows *smtc1*.

9.2C.5.3.2 Scheduling availability of UE performing measurements on a neighbor cell served by a different satellite in LEO

For UE which do not support *TBD* the following restrictions apply due to SS-RSRP/RSRQ/SINR measurement on a neighbor cell served by a different satellite in LEO.

- If *deriveSSB_IndexFromCell* is enabled the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration. If the high layer signalling of *smtc2* is configured(in TS 38.331 [2]), the SMTC periodicity follows *smtc2*; Otherwise the SMTC periodicity follows *smtc1*.

- If *deriveSSB_IndexFromCell* is not enabled the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on all symbols within SMTC window duration. If the high layer signalling of *smtc2* is configured in TS 38.331 [2], the SMTC periodicity follows *smtc2*; Otherwise the SMTC periodicity follows *smtc1*.

- If the following conditions are met:

  - The UE has been notified about system information update through paging,

  - The gap between the UE's reception of PDCCH that UE monitors in the Type 2-PDCCH CSS set that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots

- The UE is expected to receive the PDCCH that the UE monitors in the Type0-PDCCH CSS set, and/or the corresponding PDSCH, on SSB symbols to be measured.

9.2C.6 Intra-frequency measurements with measurement gaps

9.2C.6.1 Intra-frequency cell identification

The UE shall be able to identify a new detectable intra frequency cell within $T_{identify_intra_without_index}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured), or the UE has been indicated that the neighbour cell is synchronous with the serving cell (*deriveSSB-IndexFromCell* is enabled). Otherwise UE shall be able to identify a new detectable intra frequency cell within $T_{identify_intra_with_index}$. The UE shall be able to identify a new detectable intra frequency SS block of an already detected cell within $T_{identify_intra_without_index}$.

$$T_{identify_intra_without_index} = T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra} \text{ ms}$$

$$T_{identify_intra_with_index} = T_{PSS/SSS_sync_ntra} + T_{SSB_measurement_period_intra} + T_{SSB_time_index_intra} \text{ ms}$$

Where:

T_{PSS/SSS_sync_intra}: it is the time period used in PSS/SSS detection given in table 9.2C.6.2-1.

$T_{SSB_time_index_intra}$: it is the time period used to acquire the index of the SSB being measured given in table 9.2C.6.2-2.

$T_{SSB_measurement_period_intra}$: equal to a measurement period of SSB based measurement given in table 9.2C.6.3-1.

K_{gap} is the scaling factor for a SSB frequency layer to be measured within an associated measurement gap pattern. $K_{gap} = 1$ when the UE is not configured with concurrent measurement gaps. Otherwise, $K_{gap} = N_{total} / N_{available}$, where $N_{available}$ and N_{total} are calculated as follows:

For a window W of duration max(SMTC period, MGRP_max), where MGRP max is the maximum MGRP across all configured per-UE measurement gap, and starting from the beginning of any SMTC occasion:

- N_{total} is the total number of SMTC occasions that are covered by instances of the associated measurement gap within the window W, including those overlapped with other measurement gap occasions within the window, and
- $N_{available}$ is the number of SMTC occasions that are covered by instances of the non-dropped associated measurement gap within the window W after accounting for measurement gap collisions by applying the measurement gap collision rule in section 9.1.8.3.

K_{gap} is only applicable for UE supporting *parallelMeasurementGap-r17*. When concurrent measurement gaps are configured, requirements in this clause do not apply if $N_{available} = 0$.

$CSSF_{intra}$: it is a carrier specific scaling factor and is determined according to $CSSF_{within_gap,i}$ in clause 9.1.5.2 for measurement conducted within measurement gaps.

K_{multi_SMTC} is the scaling factor for measurement of multiple SMTCs or multiple satellites, and

if SMTCs do not overlap with each other,

- $K_{multi_SMTC} = 1$, if GEO satellites are measured on the carrier;
- $K_{multi_SMTC} = \left\lceil \frac{N_{LEO,i}}{N_{LEO,simul}} \right\rceil$, if LEO satellites are measured on the carrier;

if SMTCs partially overlap with each other,

- $K_{multi_SMTC} = N_{SMTC,overlap}$, if only GEO satellites are measured on the carrier;
- $K_{multi_SMTC} = \sum_{i=1}^{N_{SMTC,overlap}} \left\lceil \frac{N_{LEO,i}}{N_{LEO,simul}} \right\rceil$, if only LEO satellites are measured on the carrier;

where

- $N_{LEO,i}$ is the number of LEO satellites to be measured within i-th SMTC,
- $N_{LEO,simul}$ is the number of LEO satellites that UE can measure in parallel within an SMTC,

- $N_{SMTC,overlap}$ is the number of SMTCs that partially overlap with each other.

If the higher layer signaling in TS 38.331 [2] of *smtc2* is present and smtc1 is fully overlapping with measurement gaps and smtc2 is partially overlapping with measurement gaps, requirements are not specified for $T_{identify_intra_without_index}$ or $T_{identify_intra_with_index}$.

Table 9.2C.6.2-1: Time period for PSS/SSS detection (FR1)

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	max(600ms, 5 x K_{gap} x K_{multi_SMTC} x max(MGRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(600ms, ceil(1.5 x 5) x K_{gap} x K_{multi_SMTC} x max(MGRP, SMTC period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	5 x K_{gap} x K_{multi_SMTC} x max(MGRP, DRX cycle) x $CSSF_{intra}$

Table 9.2C.6.2-2: Time period for time index detection (Frequency range FR1)

DRX cycle	$T_{SSB_time_index_intra}$
No DRX	max(120ms, 3 x K_{gap} x K_{multi_SMTC} x max(MGRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(120ms, ceil(1.5 x 3) x K_{gap} x K_{multi_SMTC} x max(MGRP, SMTC period,DRX cycle) x $CSSF_{intra}$)
DRX cycle>320ms	3 x K_{gap} x K_{multi_SMTC} x max(MGRP, DRX cycle) x $CSSF_{intra}$

9.2C.6.3 Intrafrequency Measurement Period

The measurement period for FR1 intrafrequency measurements with gaps is as shown in table 9.2C.6.3-1.

Table 9.2C.6.3-1: Measurement period for intra-frequency measurements with gaps (FR1)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	max(200ms, 5 x K_{gap} x K_{multi_SMTC} x max(MGRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(200ms, ceil(1.5x 5) x K_{multi_SMTC} x K_{gap} x max(MGRP, SMTC period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	5 x K_{gap} x K_{multi_SMTC} x max(MGRP, DRX cycle) x $CSSF_{intra}$

9.3 NR inter-frequency measurements

9.3.1 Introduction

A measurement is defined as an SSB based inter-frequency measurement provided it is not defined as an intra-frequency measurement according to clause 9.2.

The UE shall be able to identify new inter-frequency cells and perform SS-RSRP, SS-RSRQ, and SS-SINR measurements of identified inter-frequency cells if carrier frequency information is provided by PCell or PSCell, even if no explicit neighbour list with physical layer cell identities is provided.

A measurement is defined as an inter-frequency SSB based measurements without measurement gaps (either legacy measurement gap or NCSG) in active BWP and its delay requirements are specified in clause 9.3.9, for UE capable of *interFrequencyMeas-NoGap* provided that

- the UE supports *interFrequencyMeas-Nogap-r16* [15], and
- the SSB is completely contained in the active BWP of the UE.

For UE supporting *nr-NeedForGapNCSG-reporting-r17* and indicating *NeedForGapNCSG-InfoNR* for inter-frequency measurement,

- An inter-frequency SSB measurement is defined as measurement without gap if
  - the UE indicates 'nogap-noncsg' via *NeedForGapNCSG-InfoNR* for the inter-frequency measurement, and
  - the SSB is not completely contained in the active BWP of the UE

  The delay requirements are specified in clause 9.3.9.
- An inter-frequency SSB measurement is defined as measurement with NCSG if
  - the UE indicates 'ncsg' via *NeedForGapNCSG-InfoNR* for the inter-frequency measurement, and
  - the SSB is not completely contained in the active BWP of the UE

  When network configures NCSG, the delay requirements are specified in clause 9.3.10.

  When network configures measurement gap, the delay requirements are specified in clauses 9.3.4 and 9.3.5.
- An inter-frequency SSB measurement is defined as measurement with gap if
  - the UE indicates 'gap' via *NeedForGapNCSG-InfoNR* for the inter-frequency measurement, and
  - the SSB is not completely contained in the active BWP of the UE

  When network configures measurement gap, the delay requirements are specified in clauses 9.3.4 and 9.3.5.
- For inter-frequency SSB based measurements with NCSG, UE may cause scheduling restriction as specified in clause 9.3.10.3.

For inter-frequency SSB based measurements without measurement gaps, UE may cause scheduling restriction as specified in clause 9.3.5.3.

Note: Non-CA capable UE is not expected to indicate support of *interFrequencyMeas-Nogap-r16* [15].

SSB based measurements are configured along with a measurement timing configuration (SMTC) per carrier, which provides periodicity, duration and offset information on a window of up to 5ms where the measurements on the configured inter-frequency carrier are to be performed. For inter-frequency connected mode measurements, one measurement window periodicity may be configured per inter-frequency measurement object.

When measurement gaps are needed, the UE is not expected to detect SSB and measure RSSI of RSRQ on an inter-frequency measurement object which start earlier than the gap starting time + switching time, nor detect SSB and measure RSSI of RSRQ which ends later than the gap end – switching time. When the inter-frequency cells are in FR2 and the per-FR gap is configured to the UE in EN-DC, SA NR, NE-DC and NR-DC, or the serving cells are in FR2, the inter-frequency cells are in FR2 and the per-UE gap is configured to the UE in SA NR and NR-DC, the switching time is 0.25ms. Otherwise the switching time is 0.5ms.

The requirements in this clause shall also apply, when the UE is configured to perform SRS carrier based switching and using measurement gaps.

Longer measurement period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

9.3.2 Requirements applicability

The requirements in clause 9.3 apply, provided:

- The cell being identified or measured is detectable.

An inter-frequency cell shall be considered detectable when for each relevant SSB:

- SS-RSRP related side conditions given in clauses 10.1.4 and 10.1.5 for FR1 and FR2, respectively, for a corresponding Band,

- SS-RSRQ related side conditions given in clauses 10.1.9 and 10.1.10 for FR1 and FR2, respectively, for a corresponding Band,
- SS-SINR related side conditions given in clauses 10.1.14 and 10.1.15 for FR1 and FR2, respectively, for a corresponding Band,
- SSB_RP and SSB Ês/Iot according to Annex B.2.3 for a corresponding Band.

9.3.2.1 Void

9.3.2.2 Void

9.3.3 Number of cells and number of SSB

9.3.3.1 Requirements for FR1

For each inter-frequency layer, during each layer 1 measurement period, the UE shall be capable of performing SS-RSRP, SS-RSRQ, and SS-SINR measurements for at least:

- 4 identified cells, and
- 7 SSBs with different SSB index and/or PCI on the inter-frequency layer.

9.3.3.2 Requirements for FR2

For each inter-frequency layer, during each layer 1 measurement period, the UE shall be capable of performing SS-RSRP, SS-RSRQ, and SS-SINR measurements for at least:

- 4 identified cells, and
- 10 SSBs with different SSB index and/or PCI on the inter-frequency layer, and
- 1 SSB per identified cell.

9.3.4 Inter-frequency measurement with measurement gaps

When measurement gaps are provided, or the UE supports capability of conducting such measurements without gaps, the UE shall be able to identify a new detectable inter frequency cell within $T_{identify_inter_without_index}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured) or *deriveSSB-IndexFromCellInter-r17* is configured for the FR1 and FR2-1 target frequency layers and and UE supporting [recognition of *deriveSSB-IndexFromCellInter*]. Otherwise UE shall be able to identify a new detectable inter frequency cell within $T_{identify_inter_with_index}$. The UE shall be able to identify a new detectable inter frequency SS block of an already detected cell within $T_{identify_inter_without_index.}$

$$T_{identify_inter_without_index} = (T_{PSS/SSS_sync_inter} + T_{SSB_measurement_period_inter}) \text{ ms}$$

$$T_{identify_inter_with_index} = (T_{PSS/SSS_sync_inter} + T_{SSB_measurement_period_inter} + T_{SSB_time_index_inter}) \text{ ms}$$

Where:

T_{PSS/SSS_sync_inter}: it is the time period used in PSS/SSS detection given in table 9.3.4-1, table 9.3.4-2, and table 9.3.4-5 when *highSpeedMeasInterFreq-r17* is configured and UE supports measurementEnhancementInterFreq-r17. When the SCG is deactivated, table 9.3.4-7 applies for an inter-frequency carrier configured by SCG and not configured by MCG and table 9.3.4-2 applies for an inter-frequency carrier configured by both SCG and MCG. Regardless of whether the SCG is activated or deactivated, table 9.3.4-2 applies for an inter-frequency carrier configured only by MCG.

$T_{SSB_time_index_inter}$: it is the time period used to acquire the index of the SSB being measured given in table 9.3.4-3 and table 9.3.4-6 when *highSpeedMeasInterFreq* is configured and UE supports measurementEnhancementInterFreq-r17. When the SCG is deactivated, table 9.3.4-8 applies for an inter-frequency carrier configured by SCG and not configured by MCG and table 9.3.4-4 applies for an inter-

frequency carrier configured by both SCG and MCG. Regardless of whether the SCG is activated or deactivated, table 9.3.4-4 applies for an inter-frequency carrier configured only by MCG.measurementEnhancementInterFreq-r17.

$T_{SSB_measurement_period_inter}$: equal to a measurement period of SSB based measurement given in table 9.3.5-1, table 9.3.5-2 and table 9.3.5-3 when *highSpeedMeasInterFreq* is configured and UE supports measurementEnhancementInterFreq-r17. When the SCG is deactivated, table 9.3.5-4 applies for an inter-frequency carrier configured by SCG and not configured by MCG and table 9.3.5-2 applies for an inter-frequency carrier configured by both SCG and MCG. Regardless of whether the SCG is activated or deactivated, table 9.3.5-2 applies for an inter-frequency carrier configured only by MCG.

M_{pss/sss_sync_inter}: For a UE supporting FR2-1 power class 1 or 5, M_{pss/sss_sync_inter} = 64 samples. For a UE supporting FR2-1 power class 2, M_{pss/sss_sync_inter} = 40 samples. For a UE supporting FR2-1 power class 3, M_{pss/sss_sync_inter} = 40 samples. For a UE supporting FR2-1 power class 4, M_{pss/sss_sync_inter} = 40 samples. For a UE supporting FR2-2 power class 1, M_{pss/sss_sync_inter} = 96. For a UE supporting FR2-2 power class 2, M_{pss/sss_sync_inter} = 60. For a UE supporting FR2-2 power class 3, M_{pss/sss_sync_inter} = 60.

$M_{SSB_index_inter}$: For a UE supporting FR2-1 power class 1 or 5, $M_{SSB_index_inter}$ = 40 samples. For a UE supporting FR2 power class 2, $M_{SSB_index_inter}$ = 24 samples. For a UE supporting FR2-1 power class 3, $M_{SSB_index_inter}$ = 24 samples. For a UE supporting FR2-1 power class 4, $M_{SSB_index_inter}$ = 24 samples. For a UE supporting FR2-2 power class 2 or 3, $M_{SSB_index_inter}$ = 48 samples. For a UE supporting FR2 power class 1, $M_{SSB_index_inter}$ = 72 samples.

$M_{meas_period_inter}$: For a UE supporting FR2-1 power class 1 or 5, $M_{meas_period_inter}$ =64. For a UE supporting FR2-1 power class 2, $M_{meas_period_inter}$=40. For a UE supporting FR2-1 power class 3, $M_{meas_period_inter}$ =40. For a UE supporting FR2-1 power class 4, $M_{meas_period_inter}$ = 40. For a UE supporting FR2-2 power class 1, $M_{meas_period_inter}$ = 96. For a UE supporting FR2-2 power class 2, $M_{meas_period_inter}$ = 60. For a UE supporting FR2-2 power class 3, $M_{meas_period_inter}$ = 60.

$CSSF_{inter}$: it is a carrier specific scaling factor and is determined according to $CSSF_{within_gap,i}$ in clause 9.1.5.2 for measurement conducted within measurement gaps.

K_{gap} is a scaling factor for a SSB frequency layer to be measured within an associated measurement gap pattern. K_{gap} = 1 when the UE is not configured with concurrent measurement gaps. Otherwise, $K_{gap} = N_{total} / N_{available}$, where $N_{available}$ and N_{total} are calculated as follows:

- For a window W of duration max(SMTC period, MGRP_max), where MGRP_max is the maximum MGRP across all configured per-UE measurement gap(s) and per-FR measurement gap(s) within the same FR, and starting from the beginning of any SMTC occasion:
  - N_{total} is the total number of SMTC occasions that are covered by instances of the associated measurement gap within the window W, including those dropped and non-dropped instances of the associated measurement gap within the window, and
  - $N_{available}$ is the number of SMTC occasions that are covered by instances of the non-dropped associated measurement gap within the window W, after accounting for collisions between the measurement gaps by applying the measurement gap collision rule in section 9.1.8.3.

K_{gap} is only applicable for UE supporting *concurrentMeasGap-r17*. When concurrent measurement gaps are configured, requirements in this clause do not apply if $N_{available}$ =0.

Table 9.3.4-1: Time period for PSS/SSS detection (Frequency range FR1)

Condition NOTE1,2	T_{PSS/SSS_sync_inter}
No DRX	$Max(600ms, Ceil(8 * K_{gap}) \times Max(MGRP, SMTC\ period)) \times CSSF_{inter}$
DRX cycle ≤ 320ms	$Max(600ms, Ceil(8*1.5 * K_{gap}) \times Max(MGRP, SMTC\ period, DRX\ cycle)) \times CSSF_{inter}$
DRX cycle > 320ms	$Ceil(8 * K_{gap}) \times DRX\ cycle \times CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	

NOTE 3: For a UE supporting concurrent gaps, the MRGP above is the MRGP of the measurement gap associated with the target frequency layer to be measured if concurrent measurement gaps are configured.

Table 9.3.4-2: Time period for PSS/SSS detection, (Frequency range FR2)

Condition NOTE1,2	T_{PSS/SSS_sync_inter}
No DRX	Max(600ms, Ceil($K_{gap} \times M_{pss/sss_sync_inter}$ x K_{FR}) × Max(MGRP , SMTC period)) × $CSSF_{inter}$
DRX cycle ≤ 320ms	Max(600ms, Ceil(1.5 * $K_{gap} \times M_{pss/sss_sync_inter}$ x K_{FR}) × Max(MGRP, SMTC period, DRX cycle)) × $CSSF_{inter}$
DRX cycle > 320ms	Ceil($K_{gap} \times M_{pss/sss_sync_inter}$ x K_{FR}) × DRX cycle × $CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group. NOTE 3: For a UE supporting concurrent gaps, the MRGP above is the MRGP of the measurement gap associated with the target frequency layer to be measured if concurrent measurement gaps are configured. NOTE 4: K_{FR} is a scaling factor depending on the frequency range and the SSB SCS. For FR2-1, KFR = 1. For FR2-2: KFR = 1 if the SCS of the SSB of the cell being detected is 120 kHz, KFR = 2 if the SCS of the SSB of the cell being detected is 480 kHz, and KFR = 3 if the SCS of the SSB of the cell being detected is 960 kHz.	

Table 9.3.4-3: Time period for time index detection (Frequency range FR1)

Condition NOTE1,2	$T_{SSB_time_index_inter}$
No DRX	Max(120ms, Ceil(3 * K_{gap})× Max(MGRP , SMTC period)) × $CSSF_{inter}$
DRX cycle ≤ 320ms	Max(120ms, Ceil(3 × 1.5 * K_{gap}) × Max(MGRP, SMTC period, DRX cycle)) × $CSSF_{inter}$
DRX cycle > 320ms	Ceil(3 * K_{gap})× DRX cycle × $CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group. NOTE 3: For a UE supporting concurrent gaps, the MRGP above is the MRGP of the measurement gap associated with the target frequency layer to be measured if concurrent measurement gaps are configured.	

Table 9.3.4-4: Time period for time index detection (Frequency range FR2)

Condition NOTE1,2	$T_{SSB_time_index_inter}$
No DRX	Max(200ms, Ceil($K_{gap} \times M_{SSB_index_inter}$) × Max(MGRP, SMTC period)) × $CSSF_{inter}$
DRX cycle ≤ 320ms	Max(200ms, Ceil(1.5 * $K_{gap} \times M_{SSB_index_inter}$) × Max(MGRP, SMTC period, DRX cycle)) × $CSSF_{inter}$
DRX cycle > 320ms	Ceil($K_{gap} \times M_{SSB_index_inter}$) × DRX cycle × $CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group. NOTE 3: For a UE supporting concurrent gaps, the MRGP above is the MRGP of the measurement gap associated with the target frequency layer to be measured if concurrent measurement gaps are configured.	

Table 9.3.4-5: Time period for PSS/SSS detection when highSpeedMeasInterFreq-r17 is configured (Frequency range FR1)

Condition NOTE1,2	T_{PSS/SSS_sync_inter}
No DRX	max(600ms, N1 × Max(MGRP, SMTC period)) × $CSSF_{inter}$ N1 = 7
DRX cycle ≤ 160ms	max(600ms, ceil(N2) x max(MGRP, SMTC period, DRX cycle)) x $CSSF_{inter}$ N2 = 7 x M2
160ms < DRX cycle ≤ 320ms	ceil(N3) x DRX cycle x $CSSF_{inter}$ N3 = 7 x M2
DRX cycle>320ms	N4 x DRX cycle x $CSSF_{inter}$

NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified
NOTE 2: M2 = 1.5 if SMTC periodicity > 40 ms, otherwise M2=1
NOTE 3: N4=6 if SMTC periodicity > 40 ms, otherwise N4=5

Table 9.3.4-6: Time period for time index detection when highSpeedMeasInterFreq-r17 is configured (Frequency range FR1)

Condition NOTE1,2	$T_{SSB_time_index_inter}$
No DRX	$Max(120ms, 3 \times Max(MGRP, SMTC\ period)) \times CSSF_{inter}$
DRX cycle ≤ 320ms	$Max(120ms, Ceil(3 \times M2^{NOTE3}) \times Max(MGRP, SMTC\ period, DRX\ cycle)) \times CSSF_{inter}$
DRX cycle > 320ms	$3 \times DRX\ cycle \times CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group. NOTE 3: M2 = 1.5 if SMTC periodicity > 40 ms, otherwise M2=1.	

Table 9.3.4-7: Time period for PSS/SSS detection when the inter-frequency carrier is configured only by SCG and the SCG is deactivated (FR2)

Condition NOTE1,2	T_{PSS/SSS_sync_inter}
No DRX	$Max(600ms, Ceil(K_{gap} \times M_{pss/sss_sync_inter}) \times Max(MGRP\ , measCyclePSCell)) \times CSSF_{inter}$
DRX cycle ≤ 320ms	$Max(600ms, Ceil(1.5 * K_{gap} \times M_{pss/sss_sync_inter}) \times Max(MGRP, measCyclePSCell, DRX\ cycle)) \times CSSF_{inter}$
DRX cycle > 320ms	$Ceil(K_{gap} \times M_{pss/sss_sync_inter}) \times Max(measCyclePSCell, DRX\ cycle) \times CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1. The DRX cycle is the DRX cycle of the secondary cell group. NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. NOTE 3: For a UE supporting concurrent gaps, the MRGP above is the MRGP of the measurement gap associated with the target frequency layer to be measured if concurrent measurement gaps are configured.	

Table 9.3.4-8: Time period for time index detection when inter-frequency carrier is configured only by SCG and the SCG is deactivated (FR2)

Condition NOTE1,2	$T_{SSB_time_index_inter}$
No DRX	$Max(200ms, Ceil(K_{gap} \times M_{SSB_index_inter}) \times Max(MGRP, measCyclePSCell)) \times CSSF_{inter}$
DRX cycle ≤ 320ms	$Max(200ms, Ceil(1.5 * K_{gap} \times M_{SSB_index_inter}) \times Max(MGRP, measCyclePSCell, DRX\ cycle)) \times CSSF_{inter}$
DRX cycle > 320ms	$Ceil(K_{gap} \times M_{SSB_index_inter}) \times Max(measCyclePSCell, DRX\ cycle) \times CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1. NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group. NOTE 3: For a UE supporting concurrent gaps, the MRGP above is the MRGP of the measurement gap associated with the target frequency layer to be measured if concurrent measurement gaps are configured.	

9.3.4.1 Void

9.3.4.2 Void

9.3.5 Inter-frequency measurements

When measurement gaps are provided for inter frequency measurements, or the UE supports capability of conducting such measurements without gaps, the UE physical layer shall be capable of reporting SS-RSRP, SS-RSRQ and SS-SINR measurements to higher layers with measurement accuracy as specified in clauses 10.1.4, 10.1.5, 10.1.9, 10.1.10, 10.1.14 and 10.1.15, respectively, as shown in table 9.3.5-1 and 9.3.5-2. When *highSpeedMeasInterFreq-r17* is configured, and UE supports *measurementEnhancementInterFreq-r17*, $T_{SSB_measurement_period_inter}$ is specified in Table

9.3.5-3. When SCG is deactivated, $T_{SSB_measurement_period_inter}$ is specified in Table 9.3.5-4 applies for inter-frequency carrier configured by SCG and not configured by MCG and table 9.3.5-2 applies for inter-frequency carrier configured by both SCG and MCG. Regardless of whether the SCG is activated or deactivated, table 9.3.5-2 applies for an inter-frequency carrier configured only by MCG.

Table 9.3.5-1: Measurement period for inter-frequency measurements with gaps (Frequency FR1)

Condition NOTE1,2	$T_{SSB_measurement_period_inter}$
No DRX	$Max(200ms, Ceil(8 * K_{gap}) \times Max(MGRP , SMTC\ period)) \times CSSF_{inter}$
DRX cycle ≤ 320ms	$Max(200ms, Ceil(8 \times 1.5 * K_{gap}) \times Max(MGRP, SMTC\ period, DRX\ cycle)) \times CSSF_{inter}$
DRX cycle > 320ms	$Ceil(8 * K_{gap}) \times DRX\ cycle \times CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group. NOTE 3: For a UE supporting concurrent gaps, the MRGP above is the MRGP of the measurement gap associated with the target frequency layer to be measured if concurrent measurement gaps are configured.	

Table 9.3.5-2: Measurement period for inter-frequency measurements with gaps (Frequency FR2)

Condition NOTE1,2	$T_{SSB_measurement_period_inter}$
No DRX	$Max(400ms, Ceil(K_{gap} \times M_{meas_period_inter}) \times Max(MGRP , SMTC\ period)) \times CSSF_{inter}$
DRX cycle ≤ 320ms	$Max(400ms, Ceil(1.5 * K_{gap} \times M_{meas_period_inter}) \times Max(MGRP, SMTC\ period, DRX\ cycle)) \times CSSF_{inter}$
DRX cycle > 320ms	$Ceil(K_{gap} \times M_{meas_period_inter}) \times DRX\ cycle \times CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group. NOTE 3: For a UE supporting concurrent gaps, the MRGP above is the MRGP of the measurement gap associated with the target frequency layer to be measured if concurrent measurement gaps are configured.	

Table 9.3.5-3: Measurement period for inter-frequency measurements with gaps when highSpeedMeasInterFreq-r17 is configured (Frequency range FR1)

Condition NOTE1,2	$T_{SSB_measurement_period_inter}$
No DRX	$max(200ms, 7 \times Max(MGRP, SMTC\ period)) \times CSSF_{inter}$
DRX cycle ≤ 160ms	$max(200ms, ceil(7 \times M2^{NOTE3}) \times max(MGRP, SMTC\ period, DRX\ cycle)) \times CSSF_{inter}$
160ms < DRX cycle ≤ 320ms	$ceil(7 \times M2^{NOTE3}) \times DRX\ cycle \times CSSF_{inter}$
DRX cycle>320ms	$4 \times M2^{NOTE3} \times DRX\ cycle \times CSSF_{inter}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group. NOTE 3: M2 = 1.5 if SMTC periodicity > 40 ms, otherwise M2=1	

Table 9.3.5-4: Measurement period for inter-frequency measurements with gaps when the inter-frequency carrier is configured only by SCG and the SCG is deactivated (FR2)

Condition NOTE1,2	$T_{SSB_measurement_period_inter}$
No DRX	$Max(400ms, Ceil(K_{gap} \times M_{meas_period_inter}) \times Max(MGRP, measCyclePSCell)) \times CSSF_{inter}$
DRX cycle ≤ 320ms	$Max(400ms, Ceil(1.5 * K_{gap} \times M_{meas_period_inter}) \times Max(MGRP, measCyclePSCell, DRX\ cycle)) \times CSSF_{inter}$
DRX cycle > 320ms	$Ceil(K_{gap} \times M_{meas_period_inter}) \times Max(measCyclePSCell, DRX\ cycle) \times CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1. NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group. NOTE 3: For a UE supporting concurrent gaps, the MRGP above is the MRGP of the measurement gap associated with the target frequency layer to be measured if concurrent measurement gaps are configured.	

9.3.5.1 Void

9.3.5.2 Void

9.3.5.3 Void

9.3.6 Inter-frequency measurements reporting requirements

9.3.6.1 Periodic Reporting

Reported SS-RSRP, SS-RSRQ, and SS-SINR measurements contained in periodically triggered measurement reports shall meet the requirements in clauses 10.1.4.1, 10.1.5.1, 10.1.9.1, 10.1.10.1, 10.1.14.1 and 10.1.15.1, respectively.

9.3.6.2 Event-triggered Periodic Reporting

Reported SS-RSRP, SS-RSRQ, and SS-SINR measurements contained in event triggered periodic measurement reports shall meet the requirements in clauses 10.1.4.1, 10.1.5.1, 10.1.9.1, 10.1.10.1, 10.1.14.1 and 10.1.15.1, respectively.

The first report in event triggered periodic measurement reporting shall meet the requirements specified in clause 9.3.6.3.

9.3.6.3 Event-triggered Reporting

Reported SS-RSRP, SS-RSRQ, and SS-SINR measurements contained in event triggered measurement reports shall meet the requirements in clauses 10.1.4.1, 10.1.5.1, 10.1.9.1, 10.1.10.1, 10.1.14.1 and 10.1.15.1, respectively.

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times TTI_{DCCH}$. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be within $T_{identify_inter_without_index}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index. Otherwise UE shall be able to identify a new detectable inter frequency cell within $T_{identify_inter_with_index}$. Both $T_{identify_inter_without_index}$ and $T_{identify_inter_with_index}$ are defined in clause 9.3.4. When L3 filtering is used an additional delay can be expected. In EN-DC and NE-DC operation, when the UE is configured to perform E-UTRA SRS carrier-based switching an additional delay can be expected in FR1 if the UE is capable of per-FR gap, or in both FR1 and FR2 if the UE is not capable of per-FR gap.

A cell is detectable only if at least one SSBs measured from the Cell being configured remains detectable during the time period $T_{identify_intra_without_index}$ or $T_{identify_intra_with_index}$ as defined in clause 9.2.5.1 or clause 9.2.6.2. If a cell which has been detectable at least for the time period $T_{identify\ intra\ without\ index}$ or $T_{identify\ intra\ with\ index}$ defined in clause 9.2.5.1 or clause 9.2.6.2 becomes undetectable for a period ≤ 5 seconds and then the cell becomes detectable again with the same spatial reception parameter and triggers an event, the event triggered measurement reporting delay shall be less than $T_{SSB_measurement_period_intra}$ provided the timing to that cell has not changed more than $\pm 3200/2^{\mu} T_c$ while the measurement gap has not been available and L3 filtering has not been used, where μ is the SCS configuration as defined in clause 4.2 of TS 38.211 [3]. When L3 filtering is used, an additional delay can be expected. In EN-DC and NE-DC operation, when the UE is configured to perform E-UTRA SRS carrier-based switching an additional delay can be expected in FR1 if the UE is capable of per-FR gap, or an additional delay can be expected in both FR1 and FR2 if the UE is not capable of per-FR gap.

9.3.7 Void

9.3.8 Inter-frequency SFTD measurement requirements

9.3.8.1 Introduction

This clause contains requirements for a UE supporting NR inter-frequency SFTD measurement and is applicable in RRC_CONNECTED state. The UE shall, depending on network request, perform inter-frequency SFTD measurement and report SFTD result with or without SS-RSRP. The overall delay includes RRC procedure delay defined in clause 12 in TS 38.331 [2] and SFTD measurement reporting delay in clause 9.3.8.3.

UE which fulfils the requirements in clause 9.3.8 is not supposed to fulfil the requirements defined in clause 9.2.5.4.

9.3.8.2 SFTD Measurement delay

The requirements on SFTD measurement delay defined in this clause are applicable under the side condition SCH $\hat{E}s/Iot \geq$ -3 dB for the inter-frequency neighbour cell. Depending on configuration, the SFTD measurement may be carried out with or without the support of configured measurement gaps. In the current release, indication on whether to carry out the SFTD measurement with or without measurement gaps is implicit and depending on whether measurement gaps are configured.

The UE shall be able to detect, identify and measure SFTD of up to 3 of the strongest applicable inter-frequency neighbour cells on the carrier frequency provided in the SFTD measurement configuration. Further depending on the SFTD measurement configuration, the UE shall additionally report SS-RSRP for the one or more strongest cells. The UE may or may not be configured with *cellsForWhichToReportSFTD*. The UE does not expect *cellsForWhichToReportSFTD* to change during an ongoing SFTD measurement.

When no measurement gaps are provided, the UE shall be capable of finding the inter-frequency neighbour cell regardless of its SSB position in the SMTC period, provided that the carrier frequency where SFTD measurement is configured and the serving carrier(s) form a supported CA or NR-DC band combination of the UE. The SFTD measurement shall be conducted with sustained connection to the PCell and activated SCell(s) in MCG. Depending on capability, the UE may be allowed to cause a certain amount of interruptions for reconfiguration of the radio receiver, as specified in clause 8.2.2.2.6.

When measurement gaps are provided, the UE shall be capable of finding the inter-frequency neighbour cell under the additional condition that the SSB at least occasionally falls within the measurement gap.

When no DRX is used, the UE shall be capable of determining SFTD within a physical layer measurement period of $T_{measure_SFTD1}$ as follows:

- For SFTD measurements without measurement gaps, and without additional SS-RSRP reporting:
  - For carrier frequency in FR1: $T_{measure_SFTD1}$ = 14 SMTC periods
  - For carrier frequency in FR2: $T_{measure_SFTD1}$ = 112 SMTC periods
- For SFTD measurements in measurement gaps, and without additional SS-RSRP reporting:
  - For carrier frequency in FR1: $T_{measure_SFTD1} = CSSF_{inter} \times 8 \times$ Max(MGRP, SMTC period)
  - For carrier frequency in FR2: $T_{measure_SFTD1} = CSSF_{inter} \times 64 \times$ Max(MGRP, SMTC period))
- For SFTD measurements without measurement gaps, and with additional SS-RSRP reporting:
  - For carrier frequency in FR1: $T_{measure_SFTD1}$ = 19 SMTC periods
  - For carrier frequency in FR2: $T_{measure_SFTD1}$ = 152 SMTC periods
- For SFTD measurements in measurement gaps, and with additional SS-RSRP reporting:
  - For carrier frequency in FR1: $T_{measure_SFTD1} = CSSF_{inter} \times 13 \times$ Max(MGRP, SMTC period)
  - For carrier frequency in FR2: $T_{measure_SFTD1} = CSSF_{inter} \times 104 \times$ Max(MGRP, SMTC period)

where $CSSF_{inter}$ is a carrier specific scaling factor and is determined according to $CSSF_{within_gap,i}$ in clause 9.1.5.2 for measurement conducted within measurement gaps.

When DRX is used, the same $T_{measure_SFTD1}$ as for non-DRX applies, but the reporting delay depends on the DRX cycle length in use.

In case PCell is changed due to handover, the UE shall terminate the inter-frequency SFTD measurement.

The measurement accuracy for the SFTD measurement shall fulfil the requirement in clause 10.1.21.3. The measurement accuracy for additionally reported SS-RSRP shall fulfil the requirement in clauses 10.1.4.1 and 10.1.5.1 for neighbour cell in FR1 and FR2, respectively.

9.3.8.3 SFTD Measurement reporting delay

The SFTD measurement reporting delay is defined as the time between a command that will trigger an SFTD measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty of $2 \times TTI_{DCCH}$ resulting when inserting the measurement report to the TTI of the uplink DCCH. This measurement reporting delay excludes any delay caused by lack of UL resources for UE to send the measurement report.

The SFTD measurement reporting delay shall be less than $T_{measure_SFTD1}$ defined in clause 9.3.8.2 plus the RRC procedure delay defined in TS 38.331 [2].

9.3.9 Inter frequency measurements without measurement gaps

9.3.9.1 Inter frequency Cell identification

UE satisfying the applicability conditions specified in 9.3.1 on the requirement in this clause shall be able to identify a new detectable inter frequency cell within $T_{identify_inter_without_index}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured) or *deriveSSB-IndexFromCellInter-r17* is configured for the FR1 and FR2-1 target frequency layers and and UE supporting [recognition of *deriveSSB-IndexFromCellInter*]. Otherwise UE shall be able to identify a new detectable inter frequency cell within $T_{identify_inter_with_index}$. The UE shall be able to identify a new detectable inter frequency SS block of an already detected cell within $T_{identify_inter_without_index}$.

For inter-frequency SSB based measurements without measurement gaps in active BWP, it is assumed that when UE performs inter-frequency measurements without measurement gaps in a TDD bands on FR1 and FR2, the following condition is met:

- SFN and frame boundary across serving cell and inter-frequency neighbor cells is aligned

$T_{identify_inter_without_index} = (T_{PSS/SSS_sync_inter} + T_{SSB_measurement_period_inter})$ ms

$$T_{identify_inter_without_index} = (T_{PSS/SSS_sync_inter} + T_{SSB_measurement_period_inter}) \text{ ms}$$

$$T_{identify_inter_with_index} = (T_{PSS/SSS_sync_inter} + T_{SSB_measurement_period_inter} + T_{SSB_time_index_inter}) \text{ ms}$$

Where:

T_{PSS/SSS_sync_inter}: it is the time period used in PSS/SSS detection given in table 9.3.9.1-1 and table 9.3.9.1-2.

$T_{SSB_time_index_inter}$: it is the time period used to acquire the index of the SSB being measured given in table 9.3.9.1-3.

$T_{SSB_measurement_period_inter}$: equal to a measurement period of SSB based measurement given in table 9.3.9.2-1, table 9.3.9.2-2, and table 9.3.9.2-3 and table 9.3.9.2-3a when *highSpeedMeasInterFreq-r17* is configured and UE supports measurementEnhancementInterFreq-r17.

$CSSF_{inter}$: it is a carrier specific scaling factor and is determined according to $CSSF_{outside_gap,i}$ in clause 9.1.5.1 for measurement conducted outside measurement gaps or NCSG, i.e. when interfrequency SMTC is fully non overlapping or partially overlapping with measurement gaps or according to $CSSF_{within_gap,i}$ in clause 9.1.5.2 for measurement conducted within measurement gaps, i.e. when interfrequency SMTC is fully overlapping with

measurement gaps, or according to $CSSF_{within_ncsg,i}$ in clause 9.1.5.x for measurement conducted within NCSG, i.e. when inter-frequency SMTC is fully overlapping with NCSG.

For inter-frequency SSB based measurements without measurement gaps in active BWP

M_{pss/sss_sync_inter}: For a UE supporting FR2-1 power class 1 or 5, M_{pss/sss_sync_inter} = 40. For a UE supporting FR2-1 power class 2, M_{pss/sss_sync_inter} = 24. For a UE supporting FR2-1 power class 3, M_{pss/sss_sync_inter} = 24. For a UE supporting FR2-1 power class 4, M_{pss/sss_sync} = 24. For a UE supporting FR2-2 power class 1, M_{pss/sss_sync_inter} = 60. For a UE supporting FR2-2 power class 2, M_{pss/sss_sync_inter} = 36. For a UE supporting FR2-2 power class 3, M_{pss/sss_sync_inter} = 36. For FR1, M_{pss/sss_sync_inter} = 5.

$M_{SSB_index_inter}$: For a UE supporting FR2-2 power class 1, $M_{SSB_index_inter}$ = 72. For a UE supporting FR2-2 power class 2, $M_{SSB_index_inter}$ = 48. For a UE supporting FR2-2 power class 3, $M_{SSB_index_inter}$ = 48. For FR1, $M_{SSB_index_inter}$ = 3.

$M_{meas_period_inter}$: For a UE supporting FR2-1 power class 1 or 5, $M_{meas_period_inter}$ = 40. For a vehicle mounted UE supporting FR2-1 power class 2, M_{pss/sss_sync_inter}=24. For a UE supporting FR2-1 power class 3, $M_{meas_period_inter}$ = 24. For a UE supporting FR2-1 power class 4, $M_{meas_period_inter}$ = 24. For a UE supporting FR2-2 power class 1, $M_{meas_period_inter}$ = 60. For a UE supporting FR2-2 power class 2, M_{pss/sss_sync_inter} = 36. For a UE supporting FR2-2 power class 3, $M_{meas_period_inter}$ = 36. For FR1, $M_{meas_period_inter}$ = 5.

If the UE indicates 'nogap-noncsg' via *NeedForGapNCSG-InfoNR* for the inter-frequency measurement,

M_{pss/sss_sync_inter}: For a UE supporting FR2-1 power class 1 or 5, M_{pss/sss_sync_inter} = 64 samples. For a UE supporting FR2-1 power class 2, M_{pss/sss_sync_inter} = 40 samples. For a UE supporting FR2-1 power class 3, M_{pss/sss_sync_inter} = 40 samples. For a UE supporting FR2-1 power class 4, M_{pss/sss_sync_inter} = 40 samples. For a UE supporting FR2-2 power class 1, M_{pss/sss_sync_inter} = 96. For a UE supporting FR2-2 power class 2, M_{pss/sss_sync_inter} = 60. For a UE supporting FR2-2 power class 3, M_{pss/sss_sync_inter} = 60. For FR1, M_{pss/sss_sync_inter} = 8.

$M_{SSB_index_inter}$: For a UE supporting FR2-1 power class 1 or 5, $M_{SSB_index_inter}$ = 40 samples. For a UE supporting FR2 power class 2, $M_{SSB_index_inter}$ = 24 samples. For a UE supporting FR2-1 power class 3, $M_{SSB_index_inter}$ = 24 samples. For a UE supporting FR2-1 power class 4, $M_{SSB_index_inter}$ = 24 samples. For a UE supporting FR2-2 power class 2 or 3, $M_{SSB_index_inter}$ = 48 samples. For a UE supporting FR2 power class 1, $M_{SSB_index_inter}$ = 72 samples. For FR1, $M_{SSB_index_inter}$ = 3.

$M_{meas_period_inter}$: For a UE supporting FR2-1 power class 1 or 5, $M_{meas_period_inter}$ =64. For a UE supporting FR2-1 power class 2, $M_{meas_period_inter}$=40. For a UE supporting FR2-1 power class 3, $M_{meas_period_inter}$ =40. For a UE supporting FR2-1 power class 4, $M_{meas_period_inter}$ = 40. For a UE supporting FR2-2 power class 1, $M_{meas_period_inter}$ = 96. For a UE supporting FR2-2 power class 2, $M_{meas_period_inter}$ = 60. For a UE supporting FR2-2 power class 3, $M_{meas_period_inter}$ = 60. For FR1, $M_{meas_period_inter}$ = 8.When UE supports *concurrentMeasGap-r17* and is configured with concurrent measurement gaps,

K_p is a scaling factor for an SSB frequency layer to be measured without measurement gaps. $K_p = N_{total} / N_{available}$, where $N_{available}$ and N_{total} are calculated as follows:

For a window W of duration max(SMTC period, MGRP_max), where MGRP max is the maximum MGRP across all configured per-UE MG and per-FR MG within the same FR as the SSB frequency layer, and starting at the beginning of any SMTC occasion:

N_{total} is the total number of SMTC occasions within the window, including those overlapped with MG occasions within the window, and

$N_{available}$ is the number of SMTC occasions that are not overlapped with any non-dropped MG occasion within the window W, after accounting for MG collisions by applying the selected gap collision rule provided that concurrent measurement gaps are configured.

K_p = 1 when $N_{available}$ = 0.

Otherwise, when UE is not configured with or UE does not support concurrent measurement gaps:

When interfrequency SMTC is fully non overlapping with measurement gaps or NCSG, or interfrequency SMTC is fully overlapping with MGs or NCSG, K_p =1.

When interfrequency SMTC is partially overlapping with measurement gaps, K_p = 1/(1- (SMTC period /MGRP)), where SMTC period < MGRP. When inter-frequency SMTC is partially overlapping with NCSG, K_p = 1/(1- (SMTC period /VIRP)), where SMTC period < VIRP.

For FR2,

$K_{layer1_measurement}$=1,

if all of the reference signals configured for RLM, BFD, CBD or L1-RSRP for beam reporting on any FR2 serving frequency in the same band outside measurement gap are not fully overlapped by inter-frequency SMTC occasions, or

- if all of the reference signal configured for RLM, BFD, CBD or L1-RSRP for beam reporting on any FR2 serving frequency in the same band outside measurement gap and fully-overlapped by inter-frequency SMTC occasions are not overlapped with any of the SSB symbols and the RSSI symbols, and 1 symbol before each consecutive SSB symbols and the RSSI symbols, and 1 symbol after each consecutive SSB symbols and the RSSI symbols, given that *SSB-ToMeasure* and *SS-RSSI-Measurement* are configured, where SSB symbols are indicated by *SSB-ToMeasure* and RSSI symbols are indicated by *SS-RSSI-Measurement*;

$K_{layer1_measurement}$=1.5, otherwise.

If the above-mentioned reference signal configured for L1-RSRP measurement is aperiodic CSI-RS resource, longer cell identification delay would be expected.

For calculation of K_p, if the high layer signalling (TS 38.331 [2]) of *smtc2* is configured, for cells indicated in the *pci-List* parameter in *smtc2*, the SMTC periodicity corresponds to the value of higher layer parameter *smtc2*; for the other cells, the SMTC periodicity corresponds to the value of higher layer parameter *smtc1*.

Table 9.3.9.1-1: Time period for PSS/SSS detection, (FR1)

DRX cycle	T_{PSS/SSS_sync_inter}
No DRX	max(600ms, ceil(M_{pss/sss_sync_inter} x K_p) x SMTC period)[Note 1] x $CSSF_{inter}$
DRX cycle≤ 320ms	max(600ms, ceil(M2x M_{pss/sss_sync_inter} x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{inter}$
DRX cycle>320ms	ceil(M_{pss/sss_sync_inter} x K_p) x DRX cycle x $CSSF_{inter}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified NOTE 2: Void NOTE 3: When *highSpeedMeasInterFreq-r17* is not configured, M2 = 1.5; When *highSpeedMeasInterFreq-r17* is configured, M2 = 1.5 if SMTC periodicity > 40 ms; otherwise M2 = 1	

Table 9.3.9.1-2: Time period for PSS/SSS detection, (FR2)

DRX cycle	T_{PSS/SSS_sync_inter}
No DRX	max(600ms, ceil(M_{pss/sss_sync_inter} x K_p x $K_{layer1_measurement}$) x SMTC period)[Note 1] x $CSSF_{inter}$
DRX cycle≤ 320ms	max(600ms, ceil(1.5 x M_{pss/sss_sync_inter} x K_p x $K_{layer1_measurement}$) x max(SMTC period,DRX cycle)) x $CSSF_{inter}$
DRX cycle>320ms	ceil(M_{pss/sss_sync_inter} x K_p x $K_{layer1_measurement}$) x DRX cycle x $CSSF_{inter}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified NOTE 2: Void	

Table 9.3.9.1-3: Time period for time index detection (FR1)

DRX cycle	$T_{SSB_time_index_inter}$
No DRX	max(120ms, ceil($M_{SSB_index_inter}$ x K_p) x SMTC period)[Note 1] x $CSSF_{inter}$

DRX cycle≤ 320ms	max(120ms, ceil (M2 x $M_{SSB_index_inter}$ x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{inter}$
DRX cycle>320ms	Ceil($M_{SSB_index_inter}$ x K_p) x DRX cycle x $CSSF_{inter}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified NOTE 2: Void NOTE 3: When *highSpeedMeasInterFreq-r17* is not configured, M2 = 1.5; When *highSpeedMeasInterFreq-r17* is configured, M2 = 1.5 if SMTC periodicity > 40 ms; otherwise M2 = 1	

Table 9.3.9.1-4: Time period for time index detection (FR2-2)

Condition NOTE1,2	$T_{SSB_time_index_inter}$
No DRX	Max(200ms, Ceil($M_{SSB_index_inter}$ x K_p) × SMTC period) × $CSSF_{inter}$
DRX cycle ≤ 320ms	Max(200ms, Ceil(1.5 × $M_{SSB_index_inter}$ x K_p) × Max(SMTC period, DRX cycle)) × $CSSF_{inter}$
DRX cycle > 320ms	Ceil($M_{SSB_index_inter}$ x K_p) × DRX cycle × $CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 NOTE 2: Kp is applicable for UE supporting [concurrent gaps]	

9.3.9.2 Measurement period

The UE physical layer shall be capable of reporting SS-RSRP, SS-RSRQ and SS-SINR measurements to higher layers with measurement accuracy as specified in clauses 10.1.4, 10.1.5, 10.1.9, 10.1.10, 10.1.14 and 10.1.15, respectively, as shown in table 9.3.9.2-1 and 9.3.9.2-2, if UE supports inter-frequency measurement without measurement gaps. When highSpeedMeasInterFreq-r17 is configured and UE supports [measurementEnhancementInterFreq-r17], $T_{SSB_measurement_period_inter}$ is specified in table 9.3.9.2-3.

Table 9.3.9.2-1: Measurement period for inter-frequency measurements without gaps ((FR1)

DRX cycle	$T_{SSB_measurement_period_inter}$
No DRX	max(200ms, ceil($M_{meas_period_inter}$ x K_p) x SMTC period)$^{Note\ 1}$ x $CSSF_{inter}$
DRX cycle≤ 320ms	max(200ms, ceil(1.5x $M_{meas_period_inter}$ x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{inter}$
DRX cycle>320ms	ceil($M_{meas_period_inter}$ x K_p) x DRX cycle x $CSSF_{inter}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

Table 9.3.9.2-2: Measurement period for inter-frequency measurements without gaps (FR2)

DRX cycle	$T_{SSB_measurement_period_inter}$
No DRX	max(400ms, ceil($M_{meas_period_inter}$ x K_p x $K_{layer1_measurement}$) x SMTC period)$^{Note\ 1}$ x $CSSF_{inter}$
DRX cycle≤ 320ms	max(400ms, ceil(1.5x $M_{meas_period_inter}$ x K_p x $K_{layer1_measurement}$) x max(SMTC period,DRX cycle)) x $CSSF_{inter}$
DRX cycle>320ms	ceil($M_{meas_period_inter}$ xK_p x $K_{layer1_measurement}$) x DRX cycle x $CSSF_{inter}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

Table 9.3.9.2-3: Measurement period for inter-frequency measurements without gaps in the active BWP when highSpeedMeasInterFreq-r17 is configured (FR1)

DRX cycle	$T_{SSB_measurement_period_inter}$
No DRX	max(200ms, ceil(5 x K_p) x SMTC period)$^{Note\ 1}$ x $CSSF_{inter}$
DRX cycle≤ 160ms	max(200ms, ceil(5 x M2 $^{Note\ 2}$ x K_p) x max(SMTC period, DRX cycle)) x $CSSF_{inter}$
160ms < DRX cycle≤ 320ms	ceil(4 x M2 $^{Note\ 2}$ x K_p) x max(SMTC period,DRX cycle) x $CSSF_{inter}$
DRX cycle>320ms	ceil(Y $^{Note\ 3}$ x K_p) x DRX cycle x $CSSF_{inter}$

NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified
NOTE 2: M2 = 1.5 if SMTC period > 40 ms, otherwise M2 = 1
NOTE 3: Y=3 when SMTC period <= 40ms, Y=5 when SMTC period > 40ms

Table 9.3.9.2-3a: Measurement period for inter-frequency measurements without gaps when highSpeedMeasInterFreq-r17 is configured (FR1), UE supporting 'nogap-noncsg'

Condition NOTE1,2	$T_{SSB_measurement_period_inter}$
No DRX	max(200ms, 7 × Max(MGRP, SMTC period)) × $CSSF_{inter}$
DRX cycle ≤ 160ms	max(200ms, ceil(7 x M2 NOTE3) x max(MGRP, SMTC period, DRX cycle)) x $CSSF_{inter}$
160ms < DRX cycle ≤ 320ms	ceil(7 x M2 NOTE3) x DRX cycle x $CSSF_{inter}$
DRX cycle>320ms	4 x M2 NOTE3 x DRX cycle x $CSSF_{inter}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group. NOTE 3: M2 = 1.5 if SMTC periodicity > 40 ms, otherwise M2=1	

9.3.9.3 Scheduling availability of UE during inter-frequency measurements

If UE supports *interFrequencyMeas-NoGap-r16* and the flag *interFrequencyConfig-NoGap-r16* is configured by the Network, UE is required to be capable of measuring without measurement gaps when the SSB is completely contained in the active bandwidth part of the UE. When any of the conditions in the following clauses is met, there are restrictions on the scheduling availability; otherwise, there is no scheduling restriction. Note that the SSB symbols to be measured in the following clauses are the SSB symbols indicated by SSB-ToMeasure [2], if it is configured; otherwise, all L SSB symbols within the SMTC window duration defined in clause 4.1 of TS 38.213 [3] are included.

The scheduling availability requirements when UE performs inter-frequency measurements without measurement gaps in a TDD bands on FR1 and FR2 in clause 9.3.9.3.1~9.3.9.3.3 are valid under the following conditions:

- SFN and frame boundary across serving cell and inter-frequency neighbor cells is aligned

9.3.9.3.1 Scheduling availability of UE performing measurements in TDD bands on FR1

When UE performs inter-frequency measurements without measurement gaps in a TDD band, the following restrictions apply due to SS-RSRP or SS-SINR measurement

- UE is not expected to transmit PUCCH/PUSCH/SRS on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration.

When UE performs inter-frequency measurements without measurement gaps in a TDD band, the following restrictions apply due to SS-RSRQ measurement

- UE is not expected to transmit PUCCH/PUSCH/SRS on SSB symbols to be measured, RSSI measurement symbols, and on 1 data symbol before each consecutive SSB to be measured/RSSI symbols and 1 data symbol after each consecutive SSB to be measured/RSSI symbols within SMTC window duration.

When TDD intra-band carrier aggregation is performed, the scheduling restrictions due to one serving cell should also apply to all other serving cells in the same band on the symbols that fully or partially overlap with aforementioned restricted symbols.

9.3.9.3.2 Scheduling availability of UE performing measurements with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UE which do not support *simultaneousRxDataSSB-DiffNumerology-Inter-r16* [14] the following restrictions apply due to SS-RSRP/RSRQ/SINR measurement

- If UE performs inter-frequency measurements without measurement gaps in a TDD band, UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration.

- If UE performs inter-frequency measurements without measurement gaps in a FDD band, UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on the union of restricted serving cell symbols due to measurement of all MOs, where the restricted serving cell symbols due to measurement of MO *i* include

  - serving cell symbols fully or partially overlap with SSB symbols to be measured on MO i, and $\triangle$t serving cell symbol before each consecutive SSB symbols to be measured and $\triangle$t serving cell symbol after each consecutive SSB symbols to be measured within SMTC window duration, if deriveSSB-IndexFromCellInter-r17 is enabled for MO i and UE supporting [recognition of *deriveSSB-IndexFromCellInter*]. $\triangle$t is defined as the minimum integer number of symbols with total duration no smaller than the tolerance specified in clause 7.9, or

  - serving cell symbols fully or partially overlap with SMTC window for MO i and on 1 serving cell symbol before and after the SMTC window, if deriveSSB-IndexFromCellInter-r17 is not enabled for MO i, or UE supporting [recognition of *deriveSSB-IndexFromCellInter*],

When intra-band carrier aggregation is performed, the scheduling restrictions due to a given serving cell should also apply to all other serving cells in the same band on the symbols that fully or partially overlap with aforementioned restricted symbols.

9.3.9.3.3 Scheduling availability of UE performing measurements on FR2

The following scheduling restriction applies due to SS-RSRP or SS-SINR measurement on an FR2 inter-frequency cell

> The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration.

The following scheduling restriction applies to SS-RSRQ measurement on an FR2 inter-frequency cell

- The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on SSB symbols to be measured, RSSI measurement symbols, and on 1 data symbol before each consecutive SSB to be measured/RSSI symbols and 1 data symbol after each consecutive SSB to be measured/RSSI symbols within SMTC window duration.

When intra-band carrier aggregation is performed, the scheduling restrictions due to a given serving cell should also apply to all other serving cells in the same band on the symbols that fully or partially overlap with aforementioned restricted symbols.

If following conditions are met:

- The UE has been notified about system information update through paging,

- The gap between the UE's reception of PDCCH that UE monitors in the Type 2-PDCCH CSS set that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots.

For the SSB and CORESET for RMSI scheduling multiplexing patterns 3, the UE is expected to receive the PDCCH that the UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured; and

For the SSB and CORESET for RMSI scheduling multiplexing patterns 2, the UE is expected to receive PDSCH that corresponds to the PDCCH that the UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured.

9.3.9.3.4 Scheduling availability of UE performing measurements on FR1 or FR2 in case of FR1-FR2 inter-band CA

There are no scheduling restrictions on FR1 serving cell(s) due to measurements performed on FR2 serving cell frequency layer.

There are no scheduling restrictions on FR2 serving cell(s) due to measurements performed on FR1 serving cell frequency layer.

9.3.10 Inter-frequency measurement with NCSG

9.3.10.1 Inter-frequency cell identification

For the UE supporting NCSG, if NCSG is provided, the UE shall be able to identify a new detectable inter frequency cell within $T_{identify_inter_without_index}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured) or *deriveSSB-IndexFromCellInter-r17* is configured. Otherwise UE shall be able to identify a new detectable inter frequency cell within $T_{identify_inter_with_index}$. The UE shall be able to identify a new detectable inter frequency SS block of an already detected cell within $T_{identify_inter_without_index}$.

$$T_{identify_inter_without_index} = (T_{PSS/SSS_sync_inter} + T_{SSB_measurement_period_inter}) \text{ ms}$$

$$T_{identify_inter_with_index} = (T_{PSS/SSS_sync_inter} + T_{SSB_measurement_period_inter} + T_{SSB_time_index_inter}) \text{ ms}$$

Where:

T_{PSS/SSS_sync_inter}: it is the time period used in PSS/SSS detection given in table 9.3.10.1-1 and table 9.3.10.1-2.

$T_{SSB_time_index_inter}$: it is the time period used to acquire the index of the SSB being measured given in table 9.3.10.1-3 and table 9.3.10.1-4.

$T_{SSB_measurement_period_inter}$: equal to a measurement period of SSB based measurement given in table 9.3.10.2-1 and table 9.3.10.2-2.

M_{pss/sss_sync_inter}: For a UE supporting FR2 power class 1 or 5, M_{pss/sss_sync_inter} = 64 samples. For a UE supporting FR2 power class 2, M_{pss/sss_sync_inter} = 40 samples. For a UE supporting FR2 power class 3, M_{pss/sss_sync_inter} = 40 samples. For a UE supporting FR2 power class 4, M_{pss/sss_sync_inter} = 40 samples.

$M_{SSB_index_inter}$: For a UE supporting FR2 power class 1 or 5, $M_{SSB_index_inter}$ = 40 samples. For a UE supporting FR2 power class 2, $M_{SSB_index_inter}$ = 24 samples. For a UE supporting FR2 power class 3, $M_{SSB_index_inter}$ = 24 samples. For a UE supporting FR2 power class 4, $M_{SSB_index_inter}$ = 24 samples.

$M_{meas_period_inter}$: For a UE supporting FR2 power class 1 or 5, $M_{meas_period_inter}$ =64 samples. For a UE supporting FR2 power class 2, $M_{meas_period_inter}$=40 samples. For a UE supporting FR2 power class 3, $M_{meas_period_inter}$ =40 samples. For a UE supporting FR2 power class 4, $M_{meas_period_inter}$ = 40 samples.

$CSSF_{inter}$: it is a carrier specific scaling factor and is determined according to $CSSF_{within_ncsg,i}$ in clause 9.1.5.x for measurement conducted within NCSG.

Table 9.3.10.1-1: Time period for PSS/SSS detection with NCSG (FR1)

Condition NOTE1,2	T_{PSS/SSS_sync_inter}
No DRX	Max(600ms, 8 × Max(VIRP, SMTC period)) × $CSSF_{inter}$
DRX cycle ≤ 320ms	Max(600ms, Ceil(8*1.5) × Max(VIRP, SMTC period, DRX cycle)) × $CSSF_{inter}$
DRX cycle > 320ms	8 × DRX cycle × $CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	

Table 9.3.10.1-2: Time period for PSS/SSS detection with NCSG (FR2)

Condition NOTE1,2	T_{PSS/SSS_sync_inter}
No DRX	$Max(600ms, M_{pss/sss_sync_inter} \times Max(VIRP, SMTC\ period)) \times CSSF_{inter}$
DRX cycle ≤ 320ms	$Max(600ms, (1.5 \times M_{pss/sss_sync_inter}) \times Max(VIRP, SMTC\ period, DRX\ cycle)) \times CSSF_{inter}$
DRX cycle > 320ms	$M_{pss/sss_sync_inter} \times DRX\ cycle \times CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	

Table 9.3.10.1-3: Time period for time index detection with NCSG (FR1)

Condition NOTE1,2	$T_{SSB_time_index_inter}$
No DRX	$Max(120ms, 3 \times Max(VIRP, SMTC\ period)) \times CSSF_{inter}$
DRX cycle ≤ 320ms	$Max(120ms, Ceil(3 \times 1.5) \times Max(VIRP, SMTC\ period, DRX\ cycle)) \times CSSF_{inter}$
DRX cycle > 320ms	$3 \times DRX\ cycle \times CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	

Table 9.3.10.1-4: Time period for time index detection with NCSG (FR2)

Condition NOTE1,2	$T_{SSB_time_index_inter}$
No DRX	$Max(200ms, M_{SSB_index_inter} \times Max(VIRP, SMTC\ period)) \times CSSF_{inter}$
DRX cycle ≤ 320ms	$Max(200ms, (1.5 \times M_{SSB_index_inter}) \times Max(VIRP, SMTC\ period, DRX\ cycle)) \times CSSF_{inter}$
DRX cycle > 320ms	$M_{SSB_index_inter} \times DRX\ cycle \times CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	

9.3.10.2 Measurement period

When NCSG are provided for inter frequency measurements, the UE physical layer shall be capable of reporting SS-RSRP, SS-RSRQ and SS-SINR measurements to higher layers with measurement accuracy as specified in clauses 10.1.4, 10.1.5, 10.1.9, 10.1.10, 10.1.14 and 10.1.15, respectively, as shown in table 9.3.10.2-1 and 9.3.10.2-2:

Table 9.3.10.2-1: Measurement period for inter-frequency measurements with NCSG (FR1)

Condition NOTE1,2	$T_{SSB_measurement_period_inter}$
No DRX	$Max(200ms, 8 \times Max(VIRP, SMTC\ period)) \times CSSF_{inter}$
DRX cycle ≤ 320ms	$Max(200ms, Ceil(8 \times 1.5) \times Max(VIRP, SMTC\ period, DRX\ cycle)) \times CSSF_{inter}$
DRX cycle > 320ms	$8 \times DRX\ cycle \times CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	

Table 9.3.10.2-2: Measurement period for inter-frequency measurements with NCSG (FR2)

Condition NOTE1,2	$T_{SSB_measurement_period_inter}$
No DRX	$Max(400ms, M_{meas_period_inter} \times Max(VIRP, SMTC\ period)) \times CSSF_{inter}$
DRX cycle ≤ 320ms	$Max(400ms, (1.5 \times M_{meas_period_inter}) \times Max(VIRP, SMTC\ period, DRX\ cycle)) \times CSSF_{inter}$
DRX cycle > 320ms	$M_{meas_period_inter} \times DRX\ cycle \times CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	

9.3.10.3 Scheduling availability during inter-frequency measurement with NCSG

When any of the conditions in the following clauses is met, there are restrictions on the scheduling availability; otherwise, there is no scheduling restriction. Note that the SSB symbols indicated by the union set of *SSB-ToMeasure* from all the configured measurement objects on the same serving carrier which can be merged [2], if it is configured; otherwise, all *L* SSB symbols within the SMTC window duration defined in clause 4.1 of TS 38.213 [3] are included.

The requirements in clause 9.3.10.3.3 based on *deriveSSB-IndexFromCell-inter* apply provided that UE supports [capability for *deriveSSB-IndexFromCellInter-r17*]. If UE does not supports [capability for *deriveSSB-IndexFromCellInter-r17*], the requirements in clause 9.3.10.3.3 apply assuming *deriveSSB-IndexFromCell-inter* is not enabled.

[An MO is considered as without frame boundary alignment when deriving scheduling restriction if any of the following alignment enablement conditions applicable to the MO are not satisfied:

Editor note: conditions are under discussion]

9.3.10.3.1 Scheduling availability of UE performing measurements in TDD bands on FR1

When the UE performs inter-frequency measurements with NCSG in a TDD band, the following restrictions apply due to SS-RSRP or SS-SINR measurement when (1) *simultaneousRxTxInterBandCA* is not supported for the target measurement band and the serving cell's band, or (2) target measurement and the serving cell are on the same band

The UE is not expected to transmit PUCCH/PUSCH/SRS on the union of restricted serving cell symbols due to measurement of all MOs, where the restricted serving cell symbols due to measurement of MO *i* include

- serving cell symbols fully or partially overlap with SSB symbols to be measured on MO *i*, and $\triangle$t serving cell symbol before each consecutive SSB symbols to be measured and $\triangle$t serving cell symbol after each consecutive SSB symbols to be measured within SMTC window duration, if *deriveSSB-IndexFromCellInter-r17* is enabled for MO *i*, [and the alignment enabling conditions are satisfied.] $\triangle$t is defined as the minimum integer number of symbols with total duration no smaller than the tolerance specified in clause 7.9.

- serving cell symbols fully or partially overlap with SMTC window for MO *i* and on 1 serving cell symbol before and after the SMTC window, if *deriveSSB-IndexFromCellInter-r17* is not enabled for MO *i*, [or the alignment enabling conditions are not satisfied],

When the UE performs inter-frequency measurements with NCSG in a TDD band, the following restrictions apply due to SS-RSRQ measurement when *simultaneousRxTxInterBandCA* is not supported for the target measurement band and the serving cell band

The UE is not expected to transmit PUCCH/PUSCH/SRS on the union of restricted serving cell symbols due to measurement of all MOs, where the restricted serving cell symbols due to measurement of MO *i* include

- serving cell symbols fully or partially overlap with SSB symbols to be measured on MO *i*, and $\triangle$t serving cell symbol before each consecutive SSB symbols to be measured and RSSI measurement symbols, and $\triangle$t serving cell symbol after each consecutive SSB symbols to be measured and RSSI measurement symbols within SMTC window duration, if *deriveSSB-IndexFromCellInter-r17* is enabled for MO *i*, [and the alignment enabling conditions are satisfied.] $\triangle$t is defined as the minimum integer number of symbols with total duration no smaller than the tolerance specified in clause 7.9.

- serving cell symbols fully or partially overlap with SMTC window for MO *i* and on 1 serving cell symbol before and after the SMTC window, if *deriveSSB-IndexFromCellInter-r17* is not enabled for MO *i*, [or the alignment enabling conditions are not satisfied].

If the high layer in TS 38.331 [2] signalling of *smtc2* is configured, the SMTC periodicity follows *smtc2*; Otherwise SMTC periodicity follows *smtc1*.

When TDD intra-band carrier aggregation or TDD inter-band carrier aggregation without *simultaneousRxTxInterBandCA* support is performed, the scheduling restrictions due to a given serving cell should also apply to all other serving cells on the symbols that fully or partially overlap with the aforementioned restricted symbols.

When the UE performs inter-frequency measurements with NCSG in a TDD band and *simultaneousRxTxInterBandCA* is supported for the target measurement band and a serving cell' band, no scheduling restriction applies to the serving cell.

9.3.10.3.2 Scheduling availability of UE performing measurements with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UE which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to SS-RSRP/RSRQ/SINR measurement when the target inter-frequency layer to be measured is on the same band with UE's serving cell(s).

Editor's note: FFS when target frequency layer to be measured is on the different band but with overlapped spectrum with UE's serving cell(s)

- The UE is not expected to receive PDCCH/PDSCH/TRS/CSI-RS for CQI on the union of restricted serving cell symbols due to measurement of all MOs, where the restricted serving cell symbols due to measurement of MO *i* include

- serving cell symbols fully or partially overlap with SSB symbols to be measured on MO *i*, and △t serving cell symbol before each consecutive SSB symbols to be measured and △t serving cell symbol after each consecutive SSB symbols to be measured within SMTC window duration, if *deriveSSB-IndexFromCellInter-r17* is enabled for MO *i*, [and the alignment enabling conditions are satisfied.] △t is defined as the minimum integer number of symbols with total duration no smaller than the tolerance specified in clause 7.9.

- serving cell symbols fully or partially overlap with SMTC window for MO *i* and on 1 serving cell symbol before and after the SMTC window, if *deriveSSB-IndexFromCellInter-r17* is not enabled for MO *i*, [or the alignment enabling conditions are not satisfied],

  If the high layer signalling of *smtc2* is configured in TS 38.331 [2], the SMTC periodicity follows *smtc2*; Otherwise the SMTC periodicity follows *smtc1*.

When intra-band carrier aggregation is performed, the scheduling restrictions due to a given serving cell should also apply to all other serving cells in the same band on the symbols that fully or partially overlap with the aforementioned restricted symbols.

9.3.10.3.3 Scheduling availability of UE performing measurements on FR2

When (1) UE does not support IBM between target measurement band and serving cell's band(s) nor *simultaneousRxTxInterBandCA*, or (2) target measurement and a serving cell are on the same band, the following scheduling restriction applies to the serving cell due to SS-RSRP or SS-SINR measurement on an FR2 inter-frequency cell with NCSG:

The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on the union of restricted serving cell symbols due to measurement of all MOs, where the restricted serving cell symbols due to measurement of MO *i* include

- serving cell symbols fully or partially overlap with SSB symbols to be measured on MO *i*, and △t serving cell symbol before each consecutive SSB symbols to be measured and △t serving cell symbol after each consecutive SSB symbols to be measured within SMTC window duration, if *deriveSSB-IndexFromCellInter-r17* is enabled for MO *i*, [and the alignment enabling conditions are satisfied.] △t is defined as the minimum integer number of symbols with total duration no smaller than the tolerance specified in clause 7.8.

- serving cell symbols fully or partially overlap with SMTC window for MO *i* and on 1 serving cell symbol before and after the SMTC window, if *deriveSSB-IndexFromCellInter-r17* is not enabled for MO *i*, [or the alignment enabling conditions are not satisfied],

and due to SS-RSRQ measurement on an FR2 inter-frequency cell with NCSG

The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on the union of restricted serving cell symbols due to measurement of all MOs, where the restricted serving cell symbols due to measurement of MO *i* include

- serving cell symbols fully or partially overlap with SSB symbols to be measured on MO *i*, and △t serving cell symbol before each consecutive SSB symbols to be measured and RSSI measurement symbols, and △t serving cell symbol after each consecutive SSB symbols to be measured and RSSI measurement symbols within SMTC window duration, if *deriveSSB-IndexFromCellInter-r17* is enabled for MO *i*, [and the alignment enabling conditions are satisfied.] △t is defined as the minimum integer number of symbols with total duration no smaller than the tolerance specified in clause 7.8.

- serving cell symbols fully or partially overlap with SMTC window for MO *i* and on 1 serving cell symbol before and after the SMTC window, if *deriveSSB-IndexFromCellInter-r17* is not enabled for MO *i*, [or the alignment enabling conditions are not satisfied].

When UE does not support IBM between target measurement band and serving cell's band(s) but supports *simultaneousRxTxInterBandCA*, the following scheduling restriction applies to the serving cell due to SS-RSRP or SS-SINR measurement on an FR2 inter-frequency cell with NCSG

The UE is not expected to receive PDCCH/PDSCH/TRS/CSI-RS for CQI on the union of restricted serving cell symbols due to measurement of all MOs, where the restricted serving cell symbols due to measurement of MO *i* include

- serving cell symbols fully or partially overlap with SSB symbols to be measured on MO *i*, and △t serving cell symbol before each consecutive SSB symbols to be measured and △t serving cell symbol after each consecutive SSB symbols to be measured within SMTC window duration, if *deriveSSB-IndexFromCellInter-r17* is enabled for MO *i*, [and the alignment enabling conditions are satisfied.] △t is defined as the minimum integer number of symbols with total duration no smaller than the tolerance specified in clause 7.9.

- serving cell symbols fully or partially overlap with SMTC window for MO *i* and on 1 serving cell symbol before and after the SMTC window, if *deriveSSB-IndexFromCellInter-r17* is not enabled for MO *i*, [or the alignment enabling conditions are not satisfied],

and due to SS-RSRQ measurement on an FR2 inter-frequency cell with NCSG

The UE is not expected to receive PDCCH/PDSCH/TRS/CSI-RS for CQI on the union of restricted serving cell symbols due to measurement of all MOs, where the restricted serving cell symbols due to measurement of MO *i* include

- serving cell symbols fully or partially overlap with SSB symbols to be measured on MO *i*, and △t serving cell symbol before each consecutive SSB symbols to be measured and RSSI measurement symbols, and △t serving cell symbol after each consecutive SSB symbols to be measured and RSSI measurement symbols within SMTC window duration, if *deriveSSB-IndexFromCellInter-r17* is enabled for MO *i*, [and the alignment enabling conditions are satisfied.] △t is defined as the minimum integer number of symbols with total duration no smaller than the tolerance specified in clause 7.8.

- serving cell symbols fully or partially overlap with SMTC window for MO *i* and on 1 serving cell symbol before and after the SMTC window, if *deriveSSB-IndexFromCellInter-r17* is not enabled for MO *i*, [or the alignment enabling conditions are not satisfied].

When UE supports IBM between target measurement band and serving cell's band(s) but not *simultaneousRxTxInterBandCA*, the following scheduling restriction applies to the serving cell due to SS-RSRP or SS-SINR measurement on an FR2 inter-frequency cell with NCSG

The UE is not expected to transmit PUCCH/PUSCH/SRS on the union of restricted serving cell symbols due to measurement of all MOs, where the restricted serving cell symbols due to measurement of MO *i* include

- serving cell symbols fully or partially overlap with SSB symbols to be measured on MO *i*, and △t serving cell symbol before each consecutive SSB symbols to be measured and △t serving cell symbol after each consecutive SSB symbols to be measured within SMTC window duration, if *deriveSSB-IndexFromCellInter-r17* is enabled for MO *i*, [and the alignment enabling conditions are satisfied.] △t is defined as the minimum integer number of symbols with total duration no smaller than the tolerance specified in clause 7.9..

- serving cell symbols fully or partially overlap with SMTC window for MO *i* and on 1 serving cell symbol before and after the SMTC window, if *deriveSSB-IndexFromCellInter-r17* is not enabled for MO *i*, [or the alignment enabling conditions are not satisfied],

and due to SS-RSRQ measurement on an FR2 inter-frequency cell with NCSG

The UE is not expected to transmit PUCCH/PUSCH/SRS on the union of restricted serving cell symbols due to measurement of all MOs, where the restricted serving cell symbols due to measurement of MO *i* include

- serving cell symbols fully or partially overlap with SSB symbols to be measured on MO *i*, and $\triangle$t serving cell symbol before each consecutive SSB symbols to be measured and RSSI measurement symbols, and $\triangle$t serving cell symbol after each consecutive SSB symbols to be measured and RSSI measurement symbols within SMTC window duration, if *deriveSSB-IndexFromCellInter-r17* is enabled for MO *i*, [and the alignment enabling conditions are satisfied.] $\triangle$t is defined as the minimum integer number of symbols with total duration no smaller than the tolerance specified in clause 7.9.

- serving cell symbols fully or partially overlap with SMTC window for MO *i* and on 1 serving cell symbol before and after the SMTC window, if *deriveSSB-IndexFromCellInter-r17* is not enabled for MO *i*, [or the alignment enabling conditions are not satisfied].

If the high layer signalling of *smtc2* is configured in TS 38.331 [2], the SMTC periodicity follows *smtc2*; Otherwise the SMTC periodicity follows *smtc1*.

When UE supports IBM between target measurement band and serving cell's band(s) and *simultaneousRxTxInterBandCA*, no scheduling restriction applies to the serving cell.

If following conditions are met:

- The UE has been notified about system information update through paging,

- The gap between the UE's reception of PDCCH that UE monitors in the Type 2-PDCCH CSS set that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2

For the SSB and CORESET for RMSI scheduling multiplexing patterns 3, the UE is expected to receive the PDCCH that the UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured; and

For the SSB and CORESET for RMSI scheduling multiplexing patterns 2, the UE is expected to receive PDSCH that corresponds to the PDCCH that the UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured.

9.3.10.3.4 Scheduling availability of UE performing measurements on FR1 or FR2 in case of FR1-FR2 inter-band CA

There are no scheduling restrictions on FR1 serving cell(s) due to measurements performed on FR2 serving cell frequency layer.

There are no scheduling restrictions on FR2 serving cell(s) due to measurements performed on FR1 serving cell frequency layer.

9.3A NR inter-frequency measurements in carrier frequencies with CCA

9.3A.1 Introduction

The requirements in clause 9.3A apply for inter-frequency measurements on a carrier frequency with CCA. A measurement is defined as an SSB based inter-frequency measurement provided it is not defined as an intra-frequency measurement according to clause 9.2A.The UE shall be able to identify new inter-frequency cells in carrier frequencies with CCA and perform SS-RSRP, SS-RSRQ, and SS-SINR measurements of identified inter-frequency cells if carrier

frequency information is provided by PCell or PSCell, even if no explicit neighbour list with physical layer cell identities is provided.

When the inter-frequency measurement is performed on a neighbour cell in FR2-2 with shared spectrum channel access, UE shall determine the CCA mode of the neighbour cell according to *channelAccessMode2-r17*of the cell configured in *MeasObjectNR*. If *channelAccessMode2-r17* of the cell is enabled, UE shall assume that CCA applies to the cell and perform measurement accordingly, and the requirements in clause 9.3A shall apply; otherwise, UE shall assume that CCA does not apply to the cell and perform measurement accordingly, and requirements in 9.3 shall apply.

SSB based measurements are configured along with a measurement timing configuration (SMTC) per carrier, which provides periodicity, duration and offset information on a window of up to 5ms where the measurements on the configured inter-frequency carrier are to be performed. For inter-frequency connected mode measurements, one measurement window periodicity may be configured per inter-frequency measurement object.

When measurement gaps are needed, the UE is not expected to detect SSB on an inter-frequency measurement object which start earlier than the gap starting time + switching time, nor detect SSB which end later than the gap end – switching time.

In the requirements of clause 9.3A, the term SMTC occasion not available at the UE refers to when the SMTC contains SSBs configured by gNB in a cell on a carrier frequency subject to CCA, but N candidate SSB positions for the same SS/PBCH block index within the discovery burst transmission window are not available at the UE due to DL CCA failures at gNB during the corresponding evaluation or measurement period, where:

- For the cell detection procedure: N is at least one candidate SSB position (NOTE: the one candidate SSB position for the cell detection shall not be impacted by the set of candidate SSB positions which are already being measured by the UE within the current measurement period of the on-going measurements), and

- For other procedures in clause 9.3A: N are the first two successive candidate SSB positions when two or more candidate SSB positions are configured for this SSB index in one discovery burst transmission window, otherwise N is one candidate SSB position;

otherwise the SMTC occasion is considered as available at the UE.

For the FR2-2 requirements of clause 9.3A, an SMTC occasion group consists of N consecutive SMTC occasions. An SMTC occasion group is not available, when at least one SMTC occasion in the group is not transmitted by the gNB.

9.3A.2 Requirements applicability

The requirements in clause 9.3A apply, provided:

- The cell being identified or measured is detectable.

An inter-frequency CCA cell shall be considered detectable when for each relevant SSB:

- SS-RSRP related side conditions given in clause 10.1.28,

- SS-RSRQ related side conditions given in clause 10.1.30 and TBD for FR1 and FR2-2, respectively,

- SS-SINR related side conditions given in clause 10.1.32 and TBD for FR1 and FR2-2, respectively,

- SSB_RP and SSB Ês/Iot according to Annex B.2.9.

9.3A.3 Number of cells and number of SSB

9.3A.3.1 Requirements for FR1

For each inter-frequency layer, during each layer 1 measurement period, the UE shall be capable of performing SS-RSRP, SS-RSRQ, and SS-SINR measurements for at least:

- 4 identified cells, and

- 7 SSBs with different SSB indexes and/or PCI on the inter-frequency layer.

9.3A.3.2 Requirements for FR2-2

For each inter-frequency layer, during each layer 1 measurement period, the UE shall be capable of performing SS-RSRP, SS-RSRQ, and SS-SINR measurements for at least:

- 4 identified cells, and
- 10 SSBs with different SSB index and/or PCI on the inter-frequency layer, and
- 1 SSB per identified cell.

9.3A.4 Inter-frequency cell identification

When measurement gaps are provided, or the UE supports capability of conducting such measurements without gaps, the UE shall be able to identify a new detectable inter-frequency cell within $T_{identify_inter_cca_without_index}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured). Otherwise UE shall be able to identify a new detectable inter-frequency cell, in carrier frequencies with CCA, within $T_{identify_inter_cca_with_index}$. The UE shall be able to identify a new detectable inter-frequency SS block, in carrier frequencies with CCA, of an already detected cell within $T_{identify_inter_cca_without_index}$.

$$T_{identify_inter_cca_without_index} = (T_{PSS/SSS_sync_inter_cca} + T_{SSB_measurement_period_inter_cca}) \text{ ms}$$

$$T_{identify_inter_cca_with_index} = (T_{PSS/SSS_sync_inter_cca} + T_{SSB_measurement_period_inter_cca} + T_{SSB_time_index_inter_cca}) \text{ ms}$$

Where:

$T_{PSS/SSS_sync_inter_cca}$: it is the time period used in PSS/SSS detection given in table 9.3A.4-1 and table 9.3A.4-3.

$T_{SSB_time_index_inter_cca}$: it is the time period used to acquire the index of the SSB being measured given in table 9.3A.4-2 and Table 9.3A.4-4.

$T_{SSB_measurement_period_inter_cca}$: equal to a measurement period of SSB based measurement given in table 9.3A.5-1.

$CSSF_{inter}$: it is a carrier specific scaling factor and is determined according to $CSSF_{within_gap,i}$ in clause 9.1.5.2 for measurement conducted within measurement gaps.

$M_{pss/sss_sync_inter_CCA}$: For a UE supporting FR2-2 power class 1, $M_{pss/sss_sync_inter\ CCA} = 96$. For a UE supporting FR2-2 power class 2, $M_{pss/sss_sync_inter\ CCA} = 60$. For a UE supporting FR2-2 power class 3, $M_{pss/sss_sync_inter\ CCA} = 60$.

$M_{SSB_index_inter_CCA}$: For a UE supporting FR2-2 power class 2 or 3, $M_{SSB_index_inter\ CCA} = 48$ samples. For a UE supporting FR2 power class 1, $M_{SSB_index_inter\ CCA} = 72$ samples

$M_{meas_period_inter_CCA}$: For a UE supporting FR2-2 power class 1, $M_{meas_period_inter\ CCA} = 96$. For a UE supporting FR2-2 power class 2, $M_{meas_period_inter\ CCA} = 60$. For a UE supporting FR2-2 power class 3, $M_{meas_period_inter\ CCA} = 60$

Table 9.3A.4-1: Time period for PSS/SSS detection (FR1)

Condition NOTE1,2,3,4	**$T_{PSS/SSS_sync_inter_cca}$**
No DRX	max(600ms, (8+$L_{PSS/SSS,gaps}$) x max(MGRP, SMTC period)) x $CSSF_{inter}$
DRX cycle ≤ 320ms	max(600ms, ceil((8+$L_{PSS/SSS,gaps}$)x1.5) x max(MGRP, SMTC period, DRX cycle)) x $CSSF_{inter}$
DRX cycle > 320ms	(8+$L_{PSS/SSS,gaps}$) x DRX cycle x $CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group. NOTE 3: When DRX is not configured, $L_{PSS/SSS,gaps}$ is the number of SMTC occasions not available at the UE during $T_{PSS/SSS_sync_inter_cca}$, for PSS/SSS detection, where $L_{PSS/SSS,gaps} \leq L_{PSS/SSS,gaps,max}$. When DRX is configured, $L_{PSS/SSS,gaps}$ is the number of DRX cycles in which at least one SMTC occasion is not available at the UE during $T_{PSS/SSS_sync_inter_cca}$, for PSS/SSS detection, where $L_{PSS/SSS,gaps} \leq L_{PSS/SSS,gaps,max}$. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. When configured with measurement gaps, the UE is not required to determine the availability of SMTC occasions more frequent than once during	

	MGRP. FFS: The UE is not required to determine the availability of SMTC occasions more frequent than what is required by $CSSF_{inter}$.
NOTE 4:	$L_{PSS/SSS,gaps,max}$ = 12 for max(DRX cycle, SMTC period, MGRP) ≤ 40 ms $L_{PSS/SSS,gaps,max}$ = 8 for 40 ms < max(DRX cycle, SMTC period, MGRP) ≤ 320 ms, and $L_{PSS/SSS,gaps,max}$ = 5 for DRX cycle > 320 ms.

Upon exceeding $L_{PSS/SSS,gaps,max}$, the UE is not required to meet the corresponding PSS/SSS detection requirement. The requirements apply provided that any two closest SMTC occasions available at the UE for the measurement shall be separated by no more than the maximum time requirement for the cell to remain known.

Table 9.3A.4-2: Time period for time index detection (FR1)

Condition NOTE1,2,3,4	$T_{SSB_time_index_inter_cca}$
No DRX	max(120ms, (3+ $L_{ind,gaps}$) x max(MGRP, SMTC period)) x $CSSF_{inter}$
DRX cycle ≤ 320ms	max(120ms, ceil((3+ $L_{ind,gaps}$) x 1.5) x max(MGRP, SMTC period, DRX cycle)) x $CSSF_{inter}$
DRX cycle > 320ms	(3 + $L_{ind,gaps}$) x DRX cycle x $CSSF_{inter}$
NOTE 1:	DRX or non DRX requirements apply according to the conditions described in clause 3.6.1
NOTE 2:	In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.
NOTE 3:	When DRX is not configured, $L_{ind,gaps}$ is the number of SMTC occasions not available at the UE during $T_{SSB_time_index_inter_cca}$ for time index identification, where $L_{ind,gaps} \le L_{ind,gaps,max}$. When DRX is configured, $L_{ind,gaps}$ is the number of DRX cycles in which at least one SMTC occasion is not available at the UE during $T_{SSB_time_index_inter_cca}$ for time index identification, where $L_{ind,gaps} \le L_{ind,gaps,max}$. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. When configured with measurement gaps, the UE is not required to determine the availability of SMTC occasions more frequent than once during MGRP. FFS: The UE is not required to determine the availability of SMTC occasions more frequent than what is required by $CSSF_{inter}$.
NOTE 4:	$L_{ind,gaps,max}$ = 5 for max(DRX cycle, SMTC period, MGRP) ≤ 40 ms, $L_{ind,gaps,max}$ = 3 for 40 ms < max(DRX cycle, SMTC period, MGRP) ≤ 320 ms, and $L_{ind,gaps,max}$ = 2 for DRX cycle > 320 ms.

The UE shall restart the time index detection upon exceeding $L_{ind,gaps,max}$. The requirements apply provided that any two closest SMTC occasions available at the UE for the measurement shall be separated by no more than the maximum time requirement for the cell to remain known.

Table 9.3A.4-3: Time period for PSS/SSS detection, (Frequency range FR2-2)

Condition NOTE	T_{PSS/SSS_sync_inter}
No DRX	Max(600ms, ceil($M_{pss/sss_sync_inter_CCA}$+ [$N_{RxBeam}$] x $L_{PSS/SSS,gaps}$))× Max(MGRP, SMTC period)) × $CSSF_{inter}$
DRX cycle ≤ 320ms	Max(600ms, ceil(1.5 × $M_{pss/sss_sync_inter_CCA}$+ [$N_{RxBeam}$] x $L_{PSS/SSS,gaps}$)) × Max(MGRP, SMTC period, DRX cycle)) × $CSSF_{inter}$
DRX cycle > 320ms	Ceil($M_{pss/sss_sync_inter_CCA}$+ [$N_{RxBeam}$] x $L_{PSS/SSS,gaps}$)× DRX cycle × $CSSF_{inter}$
NOTE 1:	DRX or non DRX requirements apply according to the conditions described in clause 3.6.1
NOTE 2:	If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified
NOTE 3:	When DRX is not configured, $L_{PSS/SSS,gaps}$ is the number of SMTC occasion groups not available at the UE during $T_{PSS/SSS_sync_inter_CCA}$ for PSS/SSS detection, where $L_{PSS/SSS,gaps} < L_{PSS/SSS,gaps,max}$. A SMTC occasion group consists of N_{RxBeam} consecutive SMTC occasions. An SMTC occasion group is not available, when at least one SMTC occasion in the group is not transmitted by the gNB. When DRX is configured, $L_{PSS/SSS}$ is the number of [DRX cycle groups] in which at least one SMTC occasion is not available at the UE during $T_{PSS/SSS_sync_inter_CCA}$ for PSS/SSS detection, where $L_{PSS/SSS,gaps} < L_{PSS/SSS,gaps,max}$. [A DRX occasion group consists of N_{RxBeam} consecutive DRX cycles. A DRX occasion group occasion group is not available, when at least one SMTC occasion in the group is not transmitted by the gNB.] When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle.
NOTE 4:	$L_{PSS/SSS,gaps}$ = 12 for max(DRX cycle, SMTC period, MGRP) ≤ 40 ms $L_{PSS/SSS,gaps}$ = 8 for 40 ms < max(DRX cycle, SMTC period, MGRP) ≤ 320 ms, and $L_{PSS/SSS,gaps}$ = 5 for DRX cycle > 320 ms

Upon exceeding $L_{PSS/SSS,gaps,max}$, the UE is not required to meet the corresponding PSS/SSS detection requirement. The requirements apply provided that any two closest SMTC occasions available at the UE for the measurement shall be separated by no more than the maximum time requirement for the cell to remain known.

Table 9.3A.4-4: Time period for time index detection (FR2-2)

Condition NOTE1,2,3,4	$T_{SSB_time_index_inter_cca}$
No DRX	max(120ms, ceil($M_{SSB_index_inter_CCA}$ + [N_{RxBeam}] x $L_{ind,gaps}$) x max(MGRP, SMTC period)) x $CSSF_{inter}$
DRX cycle ≤ 320ms	max(120ms, ceil($M_{SSB_index_inter_CCA}$ + [N_{RxBeam}] x $L_{ind,gaps}$) x 1.5) x max(MGRP, SMTC period, DRX cycle)) x $CSSF_{inter}$
DRX cycle > 320ms	ceil($M_{SSB_index_inter_CCA}$ + [N_{RxBeam}] x $L_{ind,gaps}$) x DRX cycle x $CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 NOTE 2: When DRX is not configured, $L_{ind,gaps}$ is the number of SMTC occasions not available at the UE during $T_{SSB_time_index_inter_cca, for}$ for time index identification, where $L_{ind,gaps} \leq L_{ind,gaps,max}$. When DRX is configured, $L_{ind,gaps}$ is the number of DRX cycles in which at least one SMTC occasion is not available at the UE during $T_{SSB_time_index_inter_cca, for}$ for time index identification, where $L_{ind,gaps} \leq L_{ind,gaps,max}$. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. When configured with measurement gaps, the UE is not required to determine the availability of SMTC occasions more frequent than once during MGRP. FFS: The UE is not required to determine the availability of SMTC occasions more frequent than what is required by $CSSF_{inter}$. NOTE 3: $L_{ind,gaps,max}$ = [5] for max(DRX cycle, SMTC period, MGRP) ≤ 40 ms, $L_{ind,gaps,max}$ = [3] for 40 ms < max(DRX cycle, SMTC period, MGRP) ≤ 320 ms, and $L_{ind,gaps,max}$ = [2] for DRX cycle > 320 ms.	

The UE shall restart the time index detection upon exceeding $L_{ind,gaps,max}$. The requirements apply provided that any two closest SMTC occasions available at the UE for the measurement shall be separated by no more than the maximum time requirement for the cell to remain known.

9.3A.5 Inter-frequency measurements

When measurement gaps are provided for inter-frequency measurements in carrier frequencies with CCA, or the UE supports capability of conducting such measurements without gaps, the UE physical layer shall be capable of reporting SS-RSRP, SS-RSRQ and SS-SINR measurements to higher layers with measurement accuracy as specified in clauses 10.1.28, 10.1.30, 10.1.32, respectively, as shown in table 9.3A.5-1:

Table 9.3A.5-1: Measurement period for inter-frequency measurements with gaps

Condition NOTE1,2,3,4	$T_{SSB_measurement_period_inter_cca}$
No DRX	max(200ms, (8+ L_{meas}) x max(MGRP, SMTC period)) x $CSSF_{inter}$
DRX cycle ≤ 320ms	max(200ms, ceil((8+ L_{meas}) x 1.5) x max(MGRP, SMTC period, DRX cycle)) x $CSSF_{inter}$
DRX cycle > 320ms	(8+ L_{meas}) x DRX cycle x $CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group. NOTE 3: When DRX is not configured, L_{meas} is the number of SMTC occasions not available at the UE during $T_{SSB_measurement_period_NR_cca}$, for inter-frequency measurements with gaps, where $L_{meas} \leq L_{meas,max}$. When DRX is configured, L_{meas} is the number of DRX cycles in which at least one SMTC occasion is not available at the UE during $T_{SSB_measurement_period_NR_cca}$, for inter-frequency measurements with gaps, where $L_{meas} \leq L_{meas,max}$. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. When configured with measurement gaps, the UE is not required to determine the availability of SMTC occasions more frequent than once during MGRP. FFS: The UE is not required to determine the availability of SMTC occasions more frequent than what is required by $CSSF_{inter}$. NOTE 4: $L_{meas,max}$ = 12 for max(DRX cycle, SMTC period, MGRP) ≤ 40 ms, $L_{meas,max}$ = 8 for 40 ms < max(DRX cycle, SMTC period, MGRP) ≤ 320 ms, and $L_{meas,max}$ = 5 for DRX cycle > 320 ms.	

The UE shall restart the measurement upon exceeding $L_{meas,max}$. The requirements apply provided that any two closest SMTC occasions available at the UE for the measurement shall be separated by no more than the maximum time requirement for the cell to remain known.

The UE shall stop the measurement attempts on the SSB of a cell and perform the detection procedure again, like for any other SSB, when the following conditions are met:

- $L_{meas} > L_{meas,max}$, and
- The time period of unsuccessful measurement attempts exceeds the maximum time required for the cell to remain known as defined in clause 9.3A.6.3.

Table 9.3A.5-2: Measurement period for inter-frequency measurements with gaps(FR2-2)

Condition NOTE1,2,3,4	$T_{SSB_measurement_period_inter_cca}$
No DRX	max(200ms, ceil($M_{meas_period_inter_CCA}$ + [N_{RxBeam}] x $L_{meas,gaps}$) x max(MGRP, SMTC period)) x $CSSF_{inter}$
DRX cycle ≤ 320ms	max(200ms, ceil($M_{meas_period_inter_CCA}$ + [N_{RxBeam}] x $L_{meas,gaps}$) x 1.5) x max(MGRP, SMTC period, DRX cycle)) x $CSSF_{inter}$
DRX cycle > 320ms	ceil($M_{meas_period_inter_CCA}$ + [N_{RxBeam}] x $L_{meas,gaps}$) x DRX cycle x $CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	
NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	
NOTE 3: When DRX is not configured, $L_{meas,gaps}$ is the number of SMTC occasions not available at the UE during $T_{SSB_measurement_period_inter_cca}$, for inter-frequency measurements with gaps, where $L_{meas,gaps} \leq L_{meas,gaps,max}$. When DRX is configured, $L_{meas,gaps}$ is the number of DRX cycles in which at least one SMTC occasion is not available at the UE during $T_{SSB_measurement_period_NR_cca}$, for inter-frequency measurements with gaps, where $L_{meas,gaps} \leq L_{meas,gaps,max}$. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. When configured with measurement gaps, the UE is not required to determine the availability of SMTC occasions more frequent than once during MGRP. FFS: The UE is not required to determine the availability of SMTC occasions more frequent than what is required by $CSSF_{inter}$.	
NOTE 4: $L_{meas,gaps,max}$ = [12] for max(DRX cycle, SMTC period, MGRP) ≤ 40 ms, $L_{meas,gaps,max}$ = [8] for 40 ms < max(DRX cycle, SMTC period, MGRP) ≤ 320 ms, and $L_{meas,gaps,max}$ = [5] for DRX cycle > 320 ms.	

The UE shall restart the measurement upon exceeding $L_{meas,gap,max}$. The requirements apply provided that any two closest SMTC occasions available at the UE for the measurement shall be separated by no more than the maximum time requirement for the cell to remain known.

9.3A.6 NR Inter-frequency measurements reporting requirements

9.3A.6.1 Periodic Reporting

Reported SS-RSRP, SS-RSRQ, and SS-SINR measurements contained in periodically triggered measurement reports shall meet the requirements in clauses 10.1.28, 10.1.30, and 10.1.32, respectively.

9.3A.6.2 Event-triggered Periodic Reporting

Reported SS-RSRP, SS-RSRQ, and SS-SINR measurements contained in event triggered periodic measurement reports shall meet the requirements in clauses 10.1.28, 10.1.30, and 10.1.32, respectively.

The first report in event triggered periodic measurement reporting shall meet the requirements specified in clause 9.3A.6.3.

9.3A.6.3 Event-triggered Reporting

Reported SS-RSRP, SS-RSRQ, and SS-SINR measurements contained in event triggered measurement reports shall meet the requirements in clauses 10.1.28, 10.1.30, and 10.1.32, respectively.

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty

is: 2 x TTI_{DCCH}. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report, and all delays due to UL CCA failures until the successful transmission of the report.

The event triggered measurement reporting delay, measured without L3 filtering shall be within $T_{identify_inter_cca_without_index}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index. Otherwise UE shall be able to identify a new detectable inter-frequency cell within $T_{identify_inter_cca_with_index}$. Both $T_{identify_inter_cca_without_index}$ and $T_{identify_inter_cca_with_index}$ are defined in clause 9.3A.4. When L3 filtering is used an additional delay can be expected.

A cell is detectable only if at least one SSB measured from the cell being configured remains detectable during the time period $T_{identify_inter_cca_without_index}$ or $T_{identify_inter_cca_with_index}$ defined in clause 9.3A.4. If a cell which has been detectable at least for the time period $T_{identify_inter_cca_without_index}$ or $T_{identify_inter_cca_with_index}$ defined in clause 9.3A.4 becomes undetectable for a period ≤ 8 seconds and then the cell becomes detectable again with the same spatial reception parameter and then triggers the measurement report as per TS 38.331 [2], the event triggered measurement reporting delay shall be less than $T_{SSB_measurement_period_inter_cca}$ defined in clause 9.3A.5 provided the timing to that cell has not changed more than $\pm 3200/2^{\mu}$ Tc while measurement gap has not been available and the L3 filtering has not been used, where μ is the SCS configuration as defined in clause 4.2 of TS 38.211 [3]. When L3 filtering is used an additional delay can be expected.

9.3A.8 Inter-frequency RSSI measurements

An RSSI measurement is defined as an inter-frequency measurement provided that the RSSI measurement bandwidth is not contained within the current carrier bandwidth of the UE.

The UE physical layer shall be capable of performing the RSSI measurements, defined in TS 38.215 [4] on one or more inter-frequency carriers operating with CCA, TS 37.213 [33], if the carrier(s) are indicated by higher layers [2], and report the RSSI measurements to higher layers. The UE physical layer shall provide to higher layers a single RSSI sample for each OFDM symbol within each configured RSSI measurement duration [2] occurring with a configured RSSI measurement timing configuration periodicity [2], *rmtc-Periodicity*. The requirements apply if *rmtc-SubframeOffset* [2] is configured.

For performing inter-frequency RSSI measurement in FR2-2,

- If a UE has serving cell in FR2-2,
  - If the TCI state is provided in RMTC configuration of FR2-2, the UE shall assume the configured RSSI measurement resources are QCL-ed with TypeD to the DL RS associated with the TCI state provided in the RMTC configuration. The UE does not expect to be configured with an explicit TCI-state in RMTC-Config with a reference serving cell in FR1 or FR2-1. If no TCI state is provided in the RMTC configuration, the UE shall assume the configured RSSI measurement resources are QCL-ed with TypeD to one of the latest received PDSCH and the latest monitored CORESET in the active BWP of a serving carrier in FR2-2.
- If a UE has no serving cell in FR2-2,
  - The UE does not expect that a TCI state is provided in RMTC configuration. It is up to UE implementation how to determine the spatial domain filter for the inter-frequency RSSI measurement in FR2-2, and no requirements are defined.

For RSSI measurement in FR2-2 with SCS of 480 kHz or 960 kHz, the RSSI measurement results shall be derived based on symbols configured by RMTC except for the first symbol and the last symbol in RMTC, and there is no requirements when *measDurationSymbols* is configured as 1.

Table 9.3A.8-1: Measurement period for inter-frequency RSSI measurements with gaps

Condition NOTE1,2,3,4	$T_{RSSI_measurement_period_inter_cca}$
No DRX	max(*reportInterval*, max(*rmtc-Periodicity, MGRP*) x $CSSF_{inter}$)
DRX	max(*reportInterval*, max(*rmtc-Periodicity*, MGRP,DRX cycle) x $CSSF_{inter}$)
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 NOTE 2: $CSSF_{inter}$ is a carrier specific scaling factor and is determined according to $CSSF_{within_gap,i}$ in clause 9.1.5.2 for measurement conducted within measurement gaps.	

If the UE requires measurement gaps to perform inter-frequency measurements, a single measurement gap pattern is used for all concurrent inter-frequency measurements, including inter-frequency RSSI measurements. The RSSI

measurement duration and the measurement gap should be aligned, and the following additional condition should be fulfilled:

- Entire RSSI measurement duration should be contained in the measurement gap.

The RSSI measurement performed and reported according to this clause shall meet the RSSI measurement accuracy requirement in Clause 10.1.34.2. The reported RSSI measurement values contained in measurement reports shall be based on the measurement report mapping requirements specified in Clause 10.1.34.3.

9.3A.9 Inter-frequency channel occupancy measurements

The UE shall be capable of estimating the channel occupancy on one or more carrier frequencies indicated by higher layers [2], based on RSSI samples provided by the physical layer. The requirements apply if *rmtc-SubframeOffset* [2] is configured.

Table 9.3A.9-1: Measurement period for inter-frequency Channel Occupancy measurements with gaps

Condition NOTE1,2,3,4	$T_{CO_measurement_period_inter_cca}$
No DRX	max(*reportInterval*, max(*rmtc-Periodicity, MGRP*) x $CSSF_{inter}$)
DRX	max(*reportInterval*, max(*rmtc-Periodicity*, MGRP,DRX cycle) x $CSSF_{inter}$)
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 NOTE 2: $CSSF_{inter}$ is a carrier specific scaling factor and is determined according to $CSSF_{within_gap,i}$ in clause 9.1.5.2 for measurement conducted within measurement gaps.	

If the UE requires measurement gaps to perform inter-frequency measurements, a single measurement gap pattern is used for all concurrent inter-frequency measurements, including inter-frequency channel occupancy measurements. The RSSI measurement duration used for channel occupancy measurement and the measurement gap should be aligned, and the following additional condition should be fulfilled:

- Entire RSSI measurement duration should be contained in the measurement gap.

The channel occupancy measurement performed and reported according to this clause shall meet the channel occupancy measurement accuracy requirements in Clause 10.1.35.2. The reported channel occupancy measurement values contained in measurement reports shall be based on the measurement reporting range specified in TS 38.331 [2].

9.3B NR inter-frequency measurements for RedCap

9.3B.1 Introduction

A measurement is defined as an SSB based inter-frequency measurement provided it is not defined as an intra-frequency measurement according to clause 9.2B.

The UE shall be able to identify new inter-frequency cells and perform SS-RSRP, SS-RSRQ, and SS-SINR measurements of identified inter-frequency cells if carrier frequency information is provided by PCell, even if no explicit neighbour list with physical layer cell identities is provided.

A measurement is defined as an inter-frequency SSB based measurements without measurement gaps for UE capable of *interFrequencyMeas-NoGap* provided

- the UE supports *interFrequencyMeas-Nogap-r16* [15], and

- the SSB is completely contained in the active BWP of the UE.

For inter-frequency SSB based measurements without measurement gaps, UE may cause scheduling restriction as specified in clause [9.3B.7.3].

SSB based measurements are configured along with a measurement timing configuration (SMTC) per carrier, which provides periodicity, duration and offset information on a window of up to 5ms where the measurements on the configured inter-frequency carrier are to be performed. For inter-frequency connected mode measurements, one measurement window periodicity may be configured per inter-frequency measurement object.

When measurement gaps are needed, the UE is not expected to detect SSB on an inter-frequency measurement object which start earlier than the gap starting time + switching time, nor detect SSB which ends later than the gap end – switching time. When the serving cells are in FR2, the inter-frequency cells are in FR2 and the per-UE gap or per-FR gap is configured to the UE in SA NR, the switching time is 0.25ms. Otherwise the switching time is 0.5ms.

Longer measurement period would be expected during the period $T_{identify_CGI_RedCap}$ when the UE is requested to decode an NR/E-UTRA CGI.

9.3B.2 Requirements applicability

The requirements in clause 9.3B apply, provided:

- The cell being identified or measured is detectable.

An inter-frequency cell shall be considered detectable when for each relevant SSB:

- For 2 Rx RedCap UE:
  - SS-RSRP related side conditions given in clauses 10.1.4 and 10.1.5 for FR1 and FR2, respectively, for a corresponding Band,
  - SS-RSRQ related side conditions given in clauses 10.1.9 and 10.1.10 for FR1 and FR2, respectively, for a corresponding Band,
  - SS-SINR related side conditions given in clauses 10.1.14 and 10.1.15 for FR1 and FR2, respectively, for a corresponding Band,
  - SSB_RP and SSB Ês/Iot according to Annex B.2.3 for a corresponding Band.
- For 1 Rx RedCap UE:
  - SS-RSRP related side conditions given in clauses [x.y.z] for FR1, respectively, for a corresponding Band,
  - SS-RSRQ related side conditions given in clauses [x.y.z] for FR1, respectively, for a corresponding Band,
  - SS-SINR related side conditions given in clauses [x.y.z] for FR1, respectively, for a corresponding Band,
  - SSB_RP and SSB Ês/Iot according to Annex [x.y.z] for a corresponding Band.

9.3B.3 Number of cells and number of SSB

9.3B.3.1 Requirements for FR1

For each inter-frequency layer, during each layer 1 measurement period, the UE shall be capable of performing SS-RSRP, SS-RSRQ, and SS-SINR measurements for at least:

- 4 identified cells, and
- 7 SSBs with different SSB index and/or PCI on the inter-frequency layer.

9.3B.3.2 Requirements for FR2

For each inter-frequency layer, during each layer 1 measurement period, the UE shall be capable of performing SS-RSRP, SS-RSRQ, and SS-SINR measurements for at least:

- 4 identified cells, and
- 10 SSBs with different SSB index and/or PCI on the inter-frequency layer, and
- 1 SSB per identified cell.

9.3B.4 Inter-frequency measurement with measurement gaps

When measurement gaps are provided, or the UE supports capability of conducting such measurements without gaps, the UE shall be able to identify a new detectable inter frequency cell within $T_{identify_inter_without_index_RedCap}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured). Otherwise UE shall be able to identify a new detectable inter frequency cell within $T_{identify_inter_with_index_RedCap}$. The UE shall be able to identify a new detectable inter frequency SS block of an already detected cell within $T_{identify_inter_without_index_RedCap}$.

$$T_{identify_inter_without_index_RedCap} = (T_{PSS/SSS_sync_inter_RedCap} + T_{SSB_measurement_period_inter_RedCap})\ ms$$

$$T_{identify_inter_with_index_RedCap} = (T_{PSS/SSS_sync_inter_RedCap} + T_{SSB_measurement_period_inter_RedCap} + T_{SSB_time_index_inter_RedCap})\ ms$$

Where:

$T_{PSS/SSS_sync_inter_RedCap}$: it is the time period used in PSS/SSS detection given in table 9.3B.4-1, table 9.3B.4-2, table 9.3B.4-3.

$T_{SSB_time_index_inter_RedCap}$: it is the time period used to acquire the index of the SSB being measured given in table 9.3B.4-4, table 9.3B.4-5, table 9.3B.4-6.

$T_{SSB_measurement_period_inter_RedCap}$: equal to a measurement period of SSB based measurement given in table 9.3B.5-1, table 9.3B.5-2, table 9.3B.5-3.

Editor's note: which power class to be used for RedCap depends on the RF session outcome.

For 2 Rx RedCap UE:

$M_{pss/sss_sync_inter_RedCap}$: For a UE supporting FR2 power class 1 or 5, $M_{pss/sss_sync_inter_RedCap}$ = 64 samples. For a UE supporting FR2 power class 2, $M_{pss/sss_sync_inter_RedCap}$ = 40 samples. For a UE supporting FR2 power class 3, $M_{pss/sss_sync_inter_RedCap}$ = 40 samples. For a UE supporting FR2 power class 4, $M_{pss/sss_sync_inter_RedCap}$ = 40 samples, For a UE supporting FR2 power class 7, $M_{pss/sss_sync_inter_RedCap}$ = 40 samples.

$M_{SSB_index_inter_RedCap}$: For a UE supporting FR2 power class 1 or 5, $M_{SSB_index_inter_RedCap}$ = 40 samples. For a UE supporting FR2 power class 2, $M_{SSB_index_inter_RedCap}$ = 24 samples. For a UE supporting FR2 power class 3, $M_{SSB_index_inter_RedCap}$ = 24 samples. For a UE supporting FR2 power class 4, $M_{SSB_index_inter_RedCap}$ = 24 samples, For a UE supporting FR2 power class 7 $M_{SSB_index_inter_RedCap}$ =24 samples.

$M_{meas_period_inter_RedCap}$: For a UE supporting FR2 power class 1 or 5, $M_{meas_period_inter_RedCap}$ =64 samples. For a UE supporting FR2 power class 2, $M_{meas_period_inter_RedCap}$ =40 samples. For a UE supporting FR2 power class 3, $M_{meas_period_inter_RedCap}$ =40 samples. For a UE supporting FR2 power class 4, $M_{meas_period_inter_RedCap}$ = 40 samples, For a UE supporting FR2 power class 7 $M_{meas_period_inter_RedCap}$ =40 samples.

$CSSF_{inter_RedCap}$: it is a carrier specific scaling factor and is determined according to $CSSF_{within_gap_RedCap,i}$ in clause 9.1A.5.2 for measurement conducted within measurement gaps.

Table 9.3B.4-1: Time period for PSS/SSS detection (Frequency range FR1) for 2Rx RedCap UE

Condition NOTE1	$T_{PSS/SSS_sync_inter_RedCap}$
No DRX	$Max(600ms, 8 \times Max(MGRP, SMTC\ period)) \times CSSF_{inter_RedCap}$
DRX cycle ≤ 320ms	$Max(600ms, Ceil(8*1.5) \times Max(MGRP, SMTC\ period, DRX\ cycle)) \times CSSF_{inter_RedCap}$
DRX cycle > 320ms	$8 \times DRX\ cycle \times CSSF_{inter_RedCap}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	

Table 9.3B.4-2: Time period for PSS/SSS detection, (Frequency range FR2) for 2Rx RedCap UE

Condition NOTE1	$T_{PSS/SSS_sync_inter_RedCap}$
No DRX	$Max(600ms, M_{pss/sss_sync_inter_RedCap} \times Max(MGRP, SMTC\ period)) \times CSSF_{inter_RedCap}$
DRX cycle ≤ 320ms	$Max(600ms, (1.5 \times M_{pss/sss_sync_inter_RedCap}) \times Max(MGRP, SMTC\ period, DRX\ cycle)) \times CSSF_{inter_RedCap}$
DRX cycle > 320ms	$M_{pss/sss_sync_inter_RedCap} \times DRX\ cycle \times CSSF_{inter_RedCap}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	

Table 9.3B.4-3: Time period for PSS/SSS detection (Frequency range FR1) for 1Rx RedCap UE

Condition NOTE1	$T_{PSS/SSS_sync_inter_RedCap}$
No DRX	$Max(600ms, 10 \times Max(MGRP, SMTC\ period)) \times CSSF_{inter_RedCap}$
DRX cycle ≤ 320ms	$Max(600ms, Ceil(10 * 1.5) \times Max(MGRP, SMTC\ period, DRX\ cycle)) \times CSSF_{inter_RedCap}$
DRX cycle > 320ms	$10 \times DRX\ cycle \times CSSF_{inter_RedCap}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	

Table 9.3B.4-4: Time period for time index detection (Frequency range FR1) for 2Rx RedCap UE

Condition NOTE1	$T_{SSB_time_index_inter_RedCap}$
No DRX	$Max(120ms, 3 \times Max(MGRP, SMTC\ period)) \times CSSF_{inter_RedCap}$
DRX cycle ≤ 320ms	$Max(120ms, Ceil(3 \times 1.5) \times Max(MGRP, SMTC\ period, DRX\ cycle)) \times CSSF_{inter_RedCap}$
DRX cycle > 320ms	$3 \times DRX\ cycle \times CSSF_{inter_RedCap}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	

Table 9.3B.4-5: Time period for time index detection (Frequency range FR2) for 2Rx RedCap UE

Condition NOTE1	$T_{SSB_time_index_inter_RedCap}$
No DRX	$Max(200ms, M_{SSB_index_inter_RedCap} \times Max(MGRP, SMTC\ period)) \times CSSF_{inter_RedCap}$
DRX cycle ≤ 320ms	$Max(200ms, (1.5 \times M_{SSB_index_inter_RedCap}) \times Max(MGRP, SMTC\ period, DRX\ cycle)) \times CSSF_{inter_RedCap}$
DRX cycle > 320ms	$M_{SSB_index_inter_RedCap} \times DRX\ cycle \times CSSF_{inter_RedCap}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	

Table 9.3B.4-6: Time period for time index detection (Frequency range FR1) for 1Rx RedCap UE

Condition NOTE1	$T_{SSB_time_index_inter_RedCap}$
No DRX	$Max(160ms, [6] \times Max(MGRP, SMTC\ period)) \times CSSF_{inter_RedCap}$
DRX cycle ≤ 320ms	$Max(160ms, Ceil([6] \times 1.5) \times Max(MGRP, SMTC\ period, DRX\ cycle)) \times CSSF_{inter_RedCap}$
DRX cycle > 320ms	$[6] \times DRX\ cycle \times CSSF_{inter_RedCap}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	

9.3B.5 Inter-frequency measurements

When measurement gaps are provided for inter frequency measurements, the 2Rx RedCap UE physical layer shall be capable of reporting SS-RSRP, SS-RSRQ and SS-SINR measurements to higher layers with measurement accuracy as specified in clauses 10.1.4, 10.1.5, 10.1.9, 10.1.10, 10.1.14 and 10.1.15, respectively, as shown in table 9.3B.5-1 and 9.3B.5-2.

Table 9.3B.5-1: Measurement period for inter-frequency measurements with gaps (Frequency FR1) for 2Rx RedCap UE

Condition NOTE1	$T_{SSB_measurement_period_inter_RedCap}$
No DRX	$Max(200ms, 8 \times Max(MGRP, SMTC\ period)) \times CSSF_{inter_RedCap}$
DRX cycle ≤ 320ms	$Max(200ms, Ceil(8 \times 1.5) \times Max(MGRP, SMTC\ period, DRX\ cycle)) \times CSSF_{inter_RedCap}$
DRX cycle > 320ms	$8 \times DRX\ cycle \times CSSF_{inter_RedCap}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	

Table 9.3B.5-2: Measurement period for inter-frequency measurements with gaps (Frequency FR2) for 2Rx RedCap UE

Condition NOTE1	$T_{SSB_measurement_period_inter_RedCap}$
No DRX	$Max(400ms, M_{meas_period_inter_RedCap} \times Max(MGRP, SMTC\ period)) \times CSSF_{inter_RedCap}$
DRX cycle ≤ 320ms	$Max(400ms, (1.5 \times M_{meas_period_inter_RedCap}) \times Max(MGRP, SMTC\ period, DRX\ cycle)) \times CSSF_{inter_RedCap}$
DRX cycle > 320ms	$M_{meas_period_inter_RedCap} \times DRX\ cycle \times CSSF_{inter_RedCap}$

NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1

When measurement gaps are provided for inter frequency measurements, the 1Rx RedCap UE physical layer shall be capable of reporting SS-RSRP, SS-RSRQ and SS-SINR measurements to higher layers with measurement accuracy as specified in clauses [x.y.z], [x.y.z], [x.y.z], [x.y.z], [x.y.z]and [x.y.z], respectively, as shown in table 9.3B.5-3.

Table 9.3B.5-3: Measurement period for inter-frequency measurements with gaps (Frequency FR1) for 1Rx RedCap UE

Condition NOTE1	$T_{SSB_measurement_period_inter_RedCap}$
No DRX	$Max(400ms, 8 \times Max(MGRP, SMTC\ period)) \times CSSF_{inter_RedCap}$
DRX cycle ≤ 320ms	$Max(400ms, ceil(1.5 \times 8) \times Max(MGRP, SMTC\ period, DRX\ cycle)) \times CSSF_{inter_RedCap}$
DRX cycle > 320ms	$8 \times DRX\ cycle \times CSSF_{inter_RedCap}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	

9.3B.6 Inter-frequency measurements reporting requirements

9.3B.6.1 Periodic Reporting

For 2 Rx RedCap UE: The requirements in clause 9.3.6.1 shall apply.

For 1 Rx RedCap UE: Reported SS-RSRP, SS-RSRQ, and SS-SINR measurements contained in periodically triggered measurement reports shall meet the requirements in clauses [x.y.z], [x.y.z], [x.y.z], [x.y.z], [x.y.z]and [x.y.z], respectively.

9.3B.6.2 Event-triggered Periodic Reporting

For 2 Rx RedCap UE: Reported SS-RSRP, SS-RSRQ, and SS-SINR measurements contained in event triggered periodic measurement reports shall meet the requirements in clauses 10.1.4.1, 10.1.5.1, 10.1.9.1, 10.1.10.1, 10.1.14.1 and 10.1.15.1, respectively.

For 1 Rx RedCap UE: Reported SS-RSRP, SS-RSRQ, and SS-SINR measurements contained in event triggered periodic measurement reports shall meet the requirements in clauses [x.y.z], [x.y.z], [x.y.z], [x.y.z], [x.y.z]and [x.y.z], respectively.

The first report in event triggered periodic measurement reporting shall meet the requirements specified in clause [9.3B.6.3].

9.3B.6.3 Event-triggered Reporting

For 2 Rx RedCap UE: Reported SS-RSRP, SS-RSRQ, and SS-SINR measurements contained in event triggered measurement reports shall meet the requirements in clauses 10.1.4.1, 10.1.5.1, 10.1.9.1, 10.1.10.1, 10.1.14.1 and 10.1.15.1, respectively.

For 1 Rx RedCap UE: Reported SS-RSRP, SS-RSRQ, and SS-SINR measurements contained in event triggered measurement reports shall meet the requirements in clauses [x.y.z], [x.y.z], [x.y.z], [x.y.z], [x.y.z]and [x.y.z], respectively.

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times TTI_{DCCH}$. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be within $T_{identify_inter_without_index_RedCap}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index. Otherwise UE shall be able to identify a new detectable inter frequency cell within $T_{identify_inter_with_index_RedCap}$. Both

$T_{identify_inter_without_index_RedCap}$ and $T_{identify_inter_with_index_RedCap}$ are defined in clause 9.3B.4. When L3 filtering is used an additional delay can be expected.

A cell is detectable only if at least one SSBs measured from the Cell being configured remains detectable during the time period $T_{identify_intra_without_index_RedCap}$ or $T_{identify_intra_with_index_RedCap}$ as defined in clause 9.2B.5.1 or clause 9.2B.6.2. If a cell which has been detectable at least for the time period $T_{identify\ intra\ without\ index_RedCap}$ or $T_{identify\ intra\ with\ index_RedCap}$ defined in clause 9.2B.5.1 or clause 9.2B.6.2 becomes undetectable for a period ≤ 5 seconds and then the cell becomes detectable again with the same spatial reception parameter and triggers an event, the event triggered measurement reporting delay shall be less than $T_{SSB_measurement_period_intra_RedCap}$ provided the timing to that cell has not changed more than $\pm 3200/2^{\mu} T_c$ while the measurement gap has not been available and L3 filtering has not been used, where μ is the SCS configuration as defined in clause 4.2 of TS 38.211 [3]. When L3 filtering is used, an additional delay can be expected.

9.3B.7 Inter frequency measurements without measurement gaps

9.3B.7.1 Inter frequency Cell identification

If UE supports *interFrequencyMeas-NoGap-r16* and the flag *interFrequencyConfig-NoGap-r16* is configured by the Network, UE shall be able to identify a new detectable inter frequency cell within $T_{identify_inter_without_index_RedCap}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured). Otherwise UE shall be able to identify a new detectable inter frequency cell within $T_{identify_inter_with_index_RedCap}$. The UE shall be able to identify a new detectable inter frequency SS block of an already detected cell within $T_{identify_inter_without_index_RedCap}$. It is assumed that when UE performs inter-frequency measurements without measurement gaps in a TDD bands on FR1 and FR2, the following conditions are met:

- SFN and frame boundary across serving cell and inter-frequency neighbor cells is aligned, and
- the timing of SSBs across serving cell and inter-frequency neighbor cells are aligned

$$T_{identify_inter_without_index_RedCap} = (T_{PSS/SSS_sync_inter_RedCap} + T_{SSB_measurement_period_inter_RedCap})\ ms$$

$$T_{identify_inter_with_index_RedCap} = (T_{PSS/SSS_sync_inter_RedCap} + T_{SSB_measurement_period_inter_RedCap} + T_{SSB_time_index_inter_RedCap})\ ms$$

Where:

$T_{PSS/SSS_sync_inter_RedCap}$: it is the time period used in PSS/SSS detection given in table 9.3B.7.1-1, table 9.3B.7.1-2 and table 9.3B.7.1-3.

$T_{SSB_time_index_inter_RedCap}$: it is the time period used to acquire the index of the SSB being measured given in table 9.3B.7.1-4 and table 9.3B.7.1-5.

$T_{SSB_measurement_period_inter_RedCap}$: equal to a measurement period of SSB based measurement given in table 9.3B.7.2-1, table 9.3B.7.2-2 and table 9.3B.7.2-3.

$CSSF_{inter_RedCap}$: it is a carrier specific scaling factor and is determined according to $CSSF_{outside_gap_RedCap,i}$ in clause 9.1A.5.1 for measurement conducted outside measurement gaps, i.e. when interfrequency SMTC is fully non overlapping or partially overlapping with measurement gaps or according to $CSSF_{within_gap_RedCap,i}$ in clause 9.1A.5.2 for measurement conducted within measurement gaps, i.e. when interfrequency SMTC is fully overlapping with measurement gaps.

$M_{pss/sss_sync_inter_RedCap}$: For a UE supporting FR2 power class 1 or 5, $M_{pss/sss_sync_inter_RedCap} = 40$ samples. For a UE supporting FR2 power class 2, $M_{pss/sss_sync_inter_RedCap} = 24$ samples. For a UE supporting FR2 power class 3, $M_{pss/sss_sync_inter_RedCap} = 24$ samples. For a UE supporting FR2 power class 4, $M_{pss/sss_sync_RedCap} = 24$ samples. For a UE supporting FR2 power class 7, $M_{pss/sss_sync_inter_RedCap} = 24$ samples.

$M_{SSB_index_inter_RedCap}$: For a UE supporting power class 1 or 5, $M_{SSB_index_inter_RedCap} = 40$ samples. For a vehicle mounted UE supporting power class 2, $M_{pss/sss_sync_inter_RedCap} = 24$ samples. For a UE supporting power class 3, $M_{SSB_index_inter_RedCap} = 24$ samples. For a UE supporting power class 4, $M_{meas_period_inter_RedCap} = 24$ samples. For a UE supporting power class 7, $M_{SSB_index_inter_RedCap} = 24$ samples.

$M_{meas_period_inter_RedCap}$: For a UE supporting FR2 power class 1 or 5, $M_{meas_period_inter_RedCap} = 40$ samples. For a vehicle mounted UE supporting FR2 power class 2, $M_{pss/sss_sync_inter_RedCap} = 24$ samples. For a UE supporting FR2

power class 3, $M_{meas_period_inter_RedCap}$ =24 samples. For a UE supporting FR2 power class 4, $M_{meas_period_inter_RedCap}$ = 24 samples. For a UE supporting FR2 power class 7, $M_{meas_period_inter_RedCap}$ =24 samples.

When interfrequency SMTC is fully non overlapping with measurement gaps or interfrequency SMTC is fully overlapping with MGs, Kp=1.

When interfrequency SMTC is partially overlapping with measurement gaps, Kp = 1/(1- (SMTC period /MGRP)), where SMTC period < MGRP.

For FR2,

$K_{layer1_measurement}$ =1,

- if all of the reference signals configured for RLM, BFD, CBD or L1-RSRP for beam reporting on any FR2 serving frequency in the same band outside measurement gap are not fully overlapped by inter-frequency SMTC occasions, or

- if all of the reference signal configured for RLM, BFD, CBD or L1-RSRP for beam reporting on any FR2 serving frequency in the same band outside measurement gap and fully-overlapped by inter-frequency SMTC occasions are not overlapped with any of the SSB symbols and the RSSI symbols, and 1 symbol before each consecutive SSB symbols and the RSSI symbols, and 1 symbol after each consecutive SSB symbols and the RSSI symbols, given that *SSB-ToMeasure* and *SS-RSSI-Measurement* are configured, where SSB symbols are indicated by *SSB-ToMeasure* and RSSI symbols are indicated by *SS-RSSI-Measurement*;

$K_{layer1_measurement}$=1.5, otherwise.

If the above-mentioned reference signal configured for L1-RSRP measurement is aperiodic CSI-RS resource, longer cell identification delay would be expected.

Table 9.3B.7.1-1: Time period for PSS/SSS detection (FR1) for 2Rx RedCap UE

DRX cycle	$T_{PSS/SSS_sync_inter_RedCap}$
No DRX	max(600ms, ceil(5 x K_p) x SMTC period)[Note 1] x $CSSF_{inter_RedCap}$
DRX cycle≤ 320ms	max(600ms, ceil(1.5x 5 x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{inter_RedCap}$
DRX cycle>320ms	ceil(5 x K_p) x DRX cycle x $CSSF_{inter_RedCap}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

Table 9.3B.7.1-2: Time period for PSS/SSS detection (FR2) for 2Rx RedCap UE

DRX cycle	$T_{PSS/SSS_sync_inter_RedCap}$
No DRX	max(600ms, ceil($M_{pss/sss_sync_inter_RedCap}$ x K_p x $K_{layer1_measurement}$) x SMTC period)[Note 1] x $CSSF_{inter_RedCap}$
DRX cycle≤ 320ms	max(600ms, ceil(1.5 x $M_{pss/sss_sync_inter_RedCap}$ x K_p x $K_{layer1_measurement}$) x max(SMTC period,DRX cycle)) x $CSSF_{inter_RedCap}$
DRX cycle>320ms	ceil($M_{pss/sss_sync_inter_RedCap}$ x K_p x $K_{layer1_measurement}$) x DRX cycle x $CSSF_{inter_RedCap}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

Table 9.3B.7.1-3: Time period for PSS/SSS detection (FR1) for 1Rx RedCap UE

DRX cycle	$T_{PSS/SSS_sync_inter_RedCap}$
No DRX	max(600ms, ceil(7 x K_p) x SMTC period)[Note 1] x $CSSF_{inter_RedCap}$
DRX cycle≤ 320ms	max(600ms, ceil(1.5x 7 x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{inter_RedCap}$
DRX cycle>320ms	ceil(7 x K_p) x DRX cycle x $CSSF_{inter_RedCap}$

NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified

Table 9.3B.7.1-4: Time period for time index detection (FR1) for 2Rx RedCap UE

DRX cycle	$T_{SSB_time_index_inter_RedCap}$
No DRX	max(120ms, ceil(3 x K_p) x SMTC period)[Note 1] x $CSSF_{inter_RedCap}$
DRX cycle≤ 320ms	max(120ms, ceil (1.5 x 3 x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{inter_RedCap}$
DRX cycle>320ms	Ceil(3 x K_p) x DRX cycle x $CSSF_{inter_RedCap}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

Table 9.3B.7.1-5: Time period for time index detection (FR1) for 1Rx RedCap UE

DRX cycle	$T_{SSB_time_index_inter_RedCap}$
No DRX	max(160ms, ceil([6] x K_p) x SMTC period)[Note 1] x $CSSF_{inter_RedCap}$
DRX cycle≤ 320ms	max(160ms, ceil (1.5 x [6] x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{inter_RedCap}$
DRX cycle>320ms	Ceil([6] x K_p) x DRX cycle x $CSSF_{inter_RedCap}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

9.3B.7.2 Measurement period

The 2Rx RedCap UE physical layer shall be capable of reporting SS-RSRP, SS-RSRQ and SS-SINR measurements to higher layers with measurement accuracy as specified in clauses 10.1.4, 10.1.5, 10.1.9, 10.1.10, 10.1.14 and 10.1.15, respectively, as shown in table 9.3B.7.2-1 and 9.3B.7.2-2, if UE supports inter-frequency measurement without measurement gaps:

Table 9.3B.7.2-1: Measurement period for inter-frequency measurements without gaps ((FR1) for 2Rx RedCap UE

DRX cycle	$T_{SSB_measurement_period_inter}$
No DRX	max(200ms, ceil(5 x K_p) x SMTC period)[Note 1] x $CSSF_{inter_RedCap}$
DRX cycle≤ 320ms	max(200ms, ceil(1.5x 5 x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{inter_RedCap}$
DRX cycle>320ms	ceil(5 x K_p) x DRX cycle x $CSSF_{inter_RedCap}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

Table 9.3B.7.2-2: Measurement period for inter-frequency measurements without gaps (FR2) for 2Rx RedCap UE

DRX cycle	$T_{SSB_measurement_period_inter_RedCap}$
No DRX	max(400ms, ceil($M_{meas_period_inter_RedCap}$ x K_p x $K_{layer1_measurement}$) x SMTC period)[Note 1] x $CSSF_{inter_RedCap}$
DRX cycle≤ 320ms	max(400ms, ceil(1.5x $M_{meas_period_inter_RedCap}$ x K_p x $K_{layer1_measurement}$) x max(SMTC period,DRX cycle)) x $CSSF_{inter_RedCap}$
DRX cycle>320ms	ceil($M_{meas_period_inter_RedCap}$ xK_p x $K_{layer1_measurement}$) x DRX cycle x $CSSF_{inter_RedCap}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

The 1Rx RedCap UE physical layer shall be capable of reporting SS-RSRP, SS-RSRQ and SS-SINR measurements to higher layers with measurement accuracy as specified in clauses [x.y.z], [x.y.z], [x.y.z], [x.y.z], [x.y.z] and [x.y.z], respectively, as shown in table 9.3B.7.2-3, if UE supports inter-frequency measurement without measurement gaps:

Table 9.3B.7.2-3: Measurement period for inter-frequency measurements without gaps ((FR1) for 1Rx RedCap UE

DRX cycle	$T_{SSB_measurement_period_inter}$
No DRX	max([200]ms, ceil([5] x K_p) x SMTC period)[Note 1] x $CSSF_{inter_RedCap}$
DRX cycle≤ 320ms	max([200]ms, ceil(1.5x [5] x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{inter_RedCap}$
DRX cycle>320ms	ceil([5] x K_p) x DRX cycle x $CSSF_{inter_RedCap}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

9.3B.7.3 Scheduling availability of UE during inter-frequency measurements

If UE supports *interFrequencyMeas-NoGap-r16* and the flag *interFrequencyConfig-NoGap-r16* is configured by the Network, UE is required to be capable of measuring without measurement gaps when the SSB is completely contained in the active bandwidth part of the UE. When any of the conditions in the following clauses is met, there are restrictions on the scheduling availability; otherwise, there is no scheduling restriction. Note that the SSB symbols to be measured in the following clauses are the SSB symbols indicated by SSB-ToMeasure [2], if it is configured; otherwise, all L SSB symbols within the SMTC window duration defined in clause 4.1 of TS 38.213 [3] are included.

The scheduling availability requirements when UE performs inter-frequency measurements without measurement gaps in a TDD bands on FR1 and FR2 and HD-FDD bands on FR1 in clause 9.3B.7.3.1~9.3B.7.3.4 are valid under the following conditions:

- SFN and frame boundary across serving cell and inter-frequency neighbor cells is aligned, and
- the timing of SSBs across serving cell and inter-frequency neighbor cells are aligned

9.3B.7.3.1 Scheduling availability of UE performing measurements in TDD bands on FR1

When UE performs inter-frequency measurements without measurement gaps in a TDD band, the following restrictions apply due to SS-RSRP or SS-SINR measurement

- UE is not expected to transmit PUCCH/PUSCH/SRS on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration.

When UE performs inter-frequency measurements without measurement gaps in a TDD band, the following restrictions apply due to SS-RSRQ measurement

- UE is not expected to transmit PUCCH/PUSCH/SRS on SSB symbols to be measured, RSSI measurement symbols, and on 1 data symbol before each consecutive SSB to be measured/RSSI symbols and 1 data symbol after each consecutive SSB to be measured/RSSI symbols within SMTC window duration.

9.3B.7.3.2 Scheduling availability of UE performing measurements with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UE which do not support *simultaneousRxDataSSB-DiffNumerology-Inter-r16* [14] the following restrictions apply due to SS-RSRP/RSRQ/SINR measurement

- If UE performs inter-frequency measurements without measurement gaps in a TDD band, UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration.

- If UE performs inter-frequency measurements without measurement gaps in a FDD band, UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on all symbols within SMTC window duration.

9.3B.7.3.3 Scheduling availability of UE performing measurements on FR2

The following scheduling restriction applies due to SS-RSRP or SS-SINR measurement on an FR2 inter-frequency cell

The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration.

The following scheduling restriction applies to SS-RSRQ measurement on an FR2 inter-frequency cell

- The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on SSB symbols to be measured, RSSI measurement symbols, and on 1 data symbol before each consecutive SSB to be measured/RSSI symbols and 1 data symbol after each consecutive SSB to be measured/RSSI symbols within SMTC window duration.

If following conditions are met:

- The UE has been notified about system information update through paging,
- The gap between the UE's reception of PDCCH that UE monitors in the Type 2-PDCCH CSS set that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2

For the SSB and CORESET for RMSI scheduling multiplexing patterns 3, the UE is expected to receive the PDCCH that the UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured; and

For the SSB and CORESET for RMSI scheduling multiplexing patterns 2, the UE is expected to receive PDSCH that corresponds to the PDCCH that the UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured.

9.3B.7.3.4 Scheduling availability of UE performing measurements in HD-FDD bands on FR1

When UE performs inter-frequency measurements without measurement gaps in a HD-FDD band, the following restrictions apply due to SS-RSRP or SS-SINR measurement

- UE is not expected to transmit PUCCH/PUSCH/SRS on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration.

When UE performs inter-frequency measurements without measurement gaps in a HD-FDD band, the following restrictions apply due to SS-RSRQ measurement

- UE is not expected to transmit PUCCH/PUSCH/SRS on SSB symbols to be measured, RSSI measurement symbols, and on 1 data symbol before each consecutive SSB to be measured/RSSI symbols and 1 data symbol after each consecutive SSB to be measured/RSSI symbols within SMTC window duration.

9.3C NR inter-frequency measurements for SAN

9.3C.1 Introduction

A measurement is defined as an SSB based inter-frequency measurement provided it is not defined as an intra-frequency measurement according to clause 9.2. The requirements apply provided the valid parameters of ephemeris information, epoch time of the ephemeris, common TA, validity timer information, downlink polarization information for target NR SAN cell are send to UE.

The UE shall be able to identify new inter-frequency cells and perform SS-RSRP, SS-RSRQ, and SS-SINR measurements of identified inter-frequency cells if carrier frequency information is provided by PCell, even if no explicit neighbour list with physical layer cell identities is provided.

A measurement is defined as an inter-frequency SSB based measurements without measurement gaps for UE capable of *interFrequencyMeas-NoGap* provided

- the UE supports *interFrequencyMeas-Nogap-r16* [15], and
- the SSB is completely contained in the active BWP of the UE.

For inter-frequency SSB based measurements without measurement gaps, UE may cause scheduling restriction as specified in clause 9.3C.5.3.

SSB based measurements are configured along with up to 2 measurement timing configurations (SMTC) in parallel per carrier, which provides periodicity, duration and offset information on a window of up to 5ms where the measurements on the configured inter-frequency carrier are to be performed. For inter-frequency connected mode measurements, the measurement window periodicity may be configured per inter-frequency measurement object.

When measurement gaps are needed, the UE is not expected to detect SSB on an inter-frequency measurement object which start earlier than the gap starting time + switching time, nor detect SSB which ends later than the gap end – switching time, and the switching time is 0.5ms.

The requirements in this clause shall also apply, when the UE is configured to perform SRS carrier based switching and using measurement gaps.

9.3C.2 Requirements applicability

The requirements in clause 9.3C apply, provided:

- The cell being identified or measured is detectable.

An inter-frequency cell shall be considered detectable when for each relevant SSB:

- SS-RSRP related side conditions given in clauses 10.1C.4 and 10.1C.5 for FR1, for a corresponding Band,
- SS-RSRQ related side conditions given in clauses 10.1C.9 and 10.1C.10 for FR1, for a corresponding Band,
- SS-SINR related side conditions given in clauses 10.1C.14 and 10.1C.15 for FR1, for a corresponding Band,
- SSB_RP and SSB Ês/Iot according to Annex B.2.3 for a corresponding Band.

9.3C.3 Number of cells and number of SSB

9.3C.3.1 Requirements for FR1

For each inter-frequency layer, during each layer 1 measurement period, the UE shall be capable of performing SS-RSRP, SS-RSRQ, and SS-SINR measurements for at least:

- [4] identified cells, and
- [7] SSBs with different SSB index and/or PCI on the inter-frequency layer.
- 4 SSBs with different SSB index and/or PCI from neighbour cells in GEO deployment.

9.3C.4 Inter-frequency measurement with measurement gaps

When measurement gaps are provided, or the UE supports capability of conducting such measurements without gaps, the UE shall be able to identify a new detectable inter frequency cell within $T_{identify_inter_without_index}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured). Otherwise UE shall be able to identify a new detectable inter frequency

cell within $T_{identify_inter_with_index}$. The UE shall be able to identify a new detectable inter frequency SS block of an already detected cell within $T_{identify_inter_without_index}$.

$$T_{identify_inter_without_index} = (T_{PSS/SSS_sync_inter} + T_{SSB_measurement_period_inter}) \text{ ms}$$

$$T_{identify_inter_with_index} = (T_{PSS/SSS_sync_inter} + T_{SSB_measurement_period_inter} + T_{SSB_time_index_inter}) \text{ ms}$$

Where:

T_{PSS/SSS_sync_inter}: it is the time period used in PSS/SSS detection given in table 9.3C.4-1.

$T_{SSB_time_index_inter}$: it is the time period used to acquire the index of the SSB being measured given in table 9.3C.4-2.

$T_{SSB_measurement_period_inter}$: equal to a measurement period of SSB based measurement given in table 9.3C.5-1.

$CSSF_{inter}$: it is a carrier specific scaling factor and is determined according to $CSSF_{within_gap,i}$ in clause 9.1C.5.2 for measurement conducted within measurement gaps.

K_{gap} is the scaling factor for a SSB frequency layer to be measured within an associated measurement gap pattern. $K_{gap} = 1$ when the UE is not configured with concurrent measurement gaps. Otherwise, $K_{gap} = N_{total} / N_{available}$, where $N_{available}$ and N_{total} are calculated as follows:

For a window W of duration max(SMTC period, MGRP_max), where MGRP max is the maximum MGRP across all configured per-UE measurement gap, and starting from the beginning of any SMTC occasion:

- N_{total} is the total number of SMTC occasions that are covered by instances of the associated measurement gap within the window W, including those overlapped with other measurement gap occasions within the window, and
- $N_{available}$ is the number of SMTC occasions that are covered by instances of the non-dropped associated measurement gap within the window W after accounting for measurement gap collisions by applying the measurement gap collision rule in section 9.1.8.3.

K_{gap} is only applicable for UE supporting *parallelMeasurementGap-r17*. When concurrent measurement gaps are configured, requirements in this clause do not apply if $N_{available} = 0$.

K_satellite: it is a statellite specific scaling factor.

- If SMTCs do not overlap with each other, and if LEO satellite(s) is/are required to be measured within SMTC
  - K_satellite = 1, if GSO satellites are measured on the carrier
  - $\text{K_satellite} = \left\lceil \frac{Num\ of\ LEO\ satellites\ to\ be\ measured\ in\ the\ SMTC}{number\ of\ LEO\ satellites\ UE\ is\ capable\ to\ measure\ in\ one\ SMTC} \right\rceil$, if LEO satellites are measured on the carrier.
- If SMTCs partially overlap with each other, and if LEO and/or GEO satellite(s) is/are required to be measured within overlapped SMTCs
  - $\text{K_satellite} = number\ of\ overlapped\ SMTCs$, if only GEO satellites are measured on the carrier
  - $\text{K_satellite} = \sum_i \left\lceil \frac{Num\ of\ LEO\ satellites\ to\ be\ measured\ in\ the\ SMTC\ i}{number\ of\ LEO\ satellites\ UE\ is\ capable\ to\ measure\ in\ one\ SMTC} \right\rceil$, if only LEO satellites are measured on the carrier.

Table 9.3C.4-1: Time period for PSS/SSS detection (Frequency range FR1)

Condition NOTE1	T_{PSS/SSS_sync_inter}
No DRX	Max(600ms, Ceil(8 x K_{gap}) × Max(MGRP, SMTC period NOTE2)) × $CSSF_{inter}$ × K_satellite
DRX cycle ≤ 320ms	Max(600ms, Ceil(8*1.5 x K_{gap}) × Max(MGRP, SMTC period, DRX cycle)) × $CSSF_{inter}$ × K_satellite
DRX cycle > 320ms	Ceil(8 x K_{gap}) × DRX cycle × $CSSF_{inter}$ × K_satellite

NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 NOTE 2: SMTC period is the SMTC period in SMTC configuration which is associated with the target cell to be measured configured in *SSB-MTC4List-r17*.

Table 9.3C.4-2: Time period for time index detection (Frequency range FR1)

Condition NOTE1	$T_{SSB_time_index_inter}$
No DRX	$Max(120ms, Ceil(3 \times K_{gap}) \times Max(MGRP, SMTC\ period^{NOTE2})) \times CSSF_{inter} \times K_satellite$
DRX cycle ≤ 320ms	$Max(120ms, Ceil(3 \times 1.5 \times K_{gap}) \times Max(MGRP, SMTC\ period, DRX\ cycle)) \times CSSF_{inter} \times K_satellite$
DRX cycle > 320ms	$Ceil(3 \times K_{gap}) \times DRX\ cycle \times CSSF_{inter} \times K_satellite$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 NOTE 2: SMTC period is the SMTC period in SMTC configuration which is associated with the target cell to be measured configured in *SSB-MTC4List-r17*.	

9.3C.5 Inter-frequency measurements

When measurement gaps are provided for inter frequency measurements, or the UE supports capability of conducting such measurements without gaps, the UE physical layer shall be capable of reporting SS-RSRP, SS-RSRQ and SS-SINR measurements to higher layers with measurement accuracy as specified in clauses 10.1C.4, 10.1C.5, 10.1C.9, 10.1C.10, 10.1C.14 and 10.1C.15, respectively, as shown in table 9.3C.5-1.

Table 9.3C.5-1: Measurement period for inter-frequency measurements with gaps (Frequency FR1)

Condition NOTE1	$T_{SSB_measurement_period_inter}$
No DRX	$Max(200ms, Ceil(8 \times K_{gap}) \times Max(MGRP, SMTC\ period^{NOTE2})) \times CSSF_{inter} \times K_satellite$
DRX cycle ≤ 320ms	$Max(200ms, Ceil(8 \times 1.5 \times K_{gap}) \times Max(MGRP, SMTC\ period, DRX\ cycle)) \times CSSF_{inter} \times K_satellite$
DRX cycle > 320ms	$Ceil(8 \times K_{gap}) \times DRX\ cycle \times CSSF_{inter} \times K_satellite$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 NOTE 2: SMTC period is the SMTC period in SMTC configuration which is associated with the target cell to be measured configured in *SSB-MTC4List-r17*.	

9.3C.6 Inter-frequency measurements reporting requirements

9.3C.6.1 Periodic Reporting

Reported SS-RSRP, SS-RSRQ, and SS-SINR measurements contained in periodically triggered measurement reports shall meet the requirements in clauses 10.1C.4.1, 10.1C.5.1, 10.1C.9.1, 10.1C.10.1, 10.1C.14.1 and 10.1C.15.1, respectively.

9.3C.6.2 Event-triggered Periodic Reporting

Reported SS-RSRP, SS-RSRQ, and SS-SINR measurements contained in event triggered periodic measurement reports shall meet the requirements in clauses 10.1C.4.1, 10.1C.5.1, 10.1C.9.1, 10.1C.10.1, 10.1C.14.1 and 10.1C.15.1, respectively.

The first report in event triggered periodic measurement reporting shall meet the requirements specified in clause 9.3C.6.3.

9.3C.6.3 Event-triggered Reporting

Reported SS-RSRP, SS-RSRQ, and SS-SINR measurements contained in event triggered measurement reports shall meet the requirements in clauses 10.1C.4.1, 10.1C.5.1, 10.1C.9.1, 10.1C.10.1, 10.1C.14.1 and 10.1C.15.1, respectively.

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times TTI_{DCCH}$. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be within $T_{identify_inter_without_index}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index. Otherwise UE shall be able to identify a new detectable inter frequency cell within $T_{identify_inter_with_index}$. Both $T_{identify_inter_without_index}$ and $T_{identify_inter_with_index}$ are defined in clause 9.3C.4. When L3 filtering is used an additional delay can be expected. I

A cell is detectable only if at least one SSBs measured from the Cell being configured remains detectable during the time period $T_{identify_intra_without_index}$ or $T_{identify_intra_with_index}$ as defined in clause 9.2C.5.1 or clause 9.2C.6.2. If a cell which has been detectable at least for the time period $T_{identify\ intra\ without\ index}$ or $T_{identify\ intra\ with\ index}$ defined in clause 9.2C.5.1 or clause 9.2C.6.2 becomes undetectable for a period ≤ 5 seconds and then the cell becomes detectable again with the same spatial reception parameter and triggers an event, the event triggered measurement reporting delay shall be less than $T_{SSB_measurement_period_intra}$ provided the timing to that cell has not changed more than $\pm 3200/2^{\mu} T_c$ while the measurement gap has not been available and L3 filtering has not been used, where μ is the SCS configuration as defined in clause 4.2 of TS 38.211 [3]. When L3 filtering is used, an additional delay can be expected.

9.3C.7 Inter frequency measurements without measurement gaps

9.3C.7.1 Inter frequency Cell identification

If UE supports *interFrequencyMeas-NoGap-r16* and the flag *interFrequencyConfig-NoGap-r16* is configured by the Network, UE shall be able to identify a new detectable inter frequency cell within $T_{identify_inter_without_index}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured). Otherwise UE shall be able to identify a new detectable inter frequency cell within $T_{identify_inter_with_index}$. The UE shall be able to identify a new detectable inter frequency SS block of an already detected cell within $T_{identify_inter_without_index}$. It is assumed that when UE performs inter-frequency measurements without measurement gaps in a TDD bands on FR1, the following conditions are met:

- SFN and frame boundary across serving cell and inter-frequency neighbor cells is aligned, and
- the timing of SSBs across serving cell and inter-frequency neighbor cells are aligned

$T_{identify_inter_without_index} = (T_{PSS/SSS_sync_inter} + T_{SSB_measurement_period_inter})$ ms

$T_{identify_inter_with_index} = (T_{PSS/SSS_sync_inter} + T_{SSB_measurement_period_inter} + T_{SSB_time_index_inter})$ ms

Where:

T_{PSS/SSS_sync_inter}: it is the time period used in PSS/SSS detection given in table 9.3C.7.1-1.

$T_{SSB_time_index_inter}$: it is the time period used to acquire the index of the SSB being measured given in table 9.3C.7.1-2.

$T_{SSB_measurement_period_inter}$: equal to a measurement period of SSB based measurement given in table 9.3C.7.2-1.

$CSSF_{inter}$: it is a carrier specific scaling factor and is determined according to $CSSF_{outside_gap,i}$ in clause 9.1C.5.1 for measurement conducted outside measurement gaps, i.e. when inter-frequency SMTC is fully non overlapping or partially overlapping with measurement gaps or according to $CSSF_{within_gap,i}$ in clause 9.1C.5.2 for measurement conducted within measurement gaps, i.e. when inter-frequency SMTC is fully overlapping with measurement gaps.

K_p is the scaling factor for a SSB frequency layer to be measured without measurement gaps. $K_p = N_{total_SAN} / N_{available_SAN}$, where $N_{available_SAN}$ and N_{total_SAN} are calculated as follows:

- For a window W of duration max(SMTC period, MGRP_max), where

- If UE supports *parallelMeasurementGap-r17* and is configured with concurrent measurement gaps, MGRP max is the maximum MGRP across all configured per-UE measurement gap. Otherwise, MGRP max is the MGRP of configured measurement gap.

- Starting from the beginning of any SMTC occasion:

  - N_{total_SAN} is the total number of SMTC occasions within the window, including those overlapped and non-overlapped with measurement gap occasions within the window, and

  - $N_{available_SAN}$ is the number of SMTC occasions within the window W that don't collide with any non-dropped MG occasion within or outside the window W, after accounting for measurement gap collisions by applying the measurement gap collision rule in section 9.1C.8.3. The collision rule between SMTC occasion and measurement gap occasion is defined in section 9.1C.9.1

K_p = [1] when $N_{available_SAN}$ = 0 and measurement gap sharing in clause 9.1.2.1a shall apply.

K_p = 1 when inter-frequency SMTC is fully non overlapping with measurement gaps.

$K_{satellite}$: it is a satellite specific scaling factor.

- If SMTCs do not overlap with each other, and if LEO and/or GEO satellite(s) is/are required to be measured within SMTC

  - $K_{satellite}$ = 1, if GSO satellite(s) is/are measured on the carrier

  - $K_{satellite} = \left\lceil \frac{Num\ of\ LEO\ satellites\ to\ be\ measured\ in\ the\ SMTC}{number\ of\ LEO\ satellites\ UE\ is\ capable\ to\ measure\ in\ one\ SMTC} \right\rceil$, if LEO satellite(s) is/are measured on the carrier.

- If SMTCs partially overlap with each other, and if LEO and/or GEO satellite(s) is/are required to be measured within overlapped SMTCs

  - $K_{satellite} = number\ of\ overlapped\ SMTCs$, if only GEO satellite(s) is/are measured on the carrier

  - $K_{satellite} = \sum_i \left\lceil \frac{Num\ of\ LEO\ satellites\ to\ be\ measured\ in\ the\ SMTC\ i}{number\ of\ LEO\ satellites\ UE\ is\ capable\ to\ measure\ in\ one\ SMTC} \right\rceil$, if only LEO satellite(s) is/are measured on the carrier.

Table 9.3C.7.1-1: Time period for PSS/SSS detection, (FR1)

DRX cycle	T_{PSS/SSS_sync_inter}
No DRX	max(600ms, ceil(5 x K_p) x SMTC period)[Note 1] x $CSSF_{inter} \times K_{satellite}$
DRX cycle≤ 320ms	max(600ms, ceil(1.5x 5 x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{inter} \times K_{satellite}$
DRX cycle>320ms	ceil(5 x K_p) x DRX cycle x $CSSF_{inter} \times K_{satellite}$
NOTE 1: SMTC period is the SMTC period in SMTC configuration which is associated with the target cell to be measured configured in *SSB-MTC4List-r17*.	

Table 9.3C.7.1-2: Time period for time index detection (FR1)

DRX cycle	$T_{SSB_time_index_inter}$
No DRX	max(120ms, ceil(3 x K_p) x SMTC period)[Note 1] x $CSSF_{inter} \times K_{satellite}$
DRX cycle≤ 320ms	max(120ms, ceil (1.5 x 3 x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{inter} \times K_{satellite}$
DRX cycle>320ms	Ceil(3 x K_p) x DRX cycle x $CSSF_{inter} \times K_{satellite}$
NOTE 1: SMTC period is the SMTC period in SMTC configuration which is associated with the target cell to be measured configured in *SSB-MTC4List-r17*.	

9.3C.7.2 Measurement period

The UE physical layer shall be capable of reporting SS-RSRP, SS-RSRQ and SS-SINR measurements to higher layers with measurement accuracy as specified in clauses 10.1C.4, 10.1C.5, 10.1C.9, 10.1C.10, 10.1C.14 and 10.1C.15, respectively, as shown in table 9.3C.7.2-1, if UE supports inter-frequency measurement without measurement gaps:

Table 9.3C.7-1: Measurement period for inter-frequency measurements without gaps ((FR1)

DRX cycle	$T_{SSB_measurement_period_inter}$
No DRX	max(200ms, ceil(5 x K_p) x SMTC period)[Note 1] x $CSSF_{inter}$ × K_satellite
DRX cycle≤ 320ms	max(200ms, ceil(1.5x 5 x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{inter}$ × K_satellite
DRX cycle>320ms	ceil(5 x K_p) x DRX cycle x $CSSF_{inter}$ × K_satellite
NOTE 1: SMTC period is the SMTC period in SMTC configuration which is associated with the target cell to be measured configured in *SSB-MTC4List-r17*.	

9.3C.7.3 Scheduling availability of UE during inter-frequency measurements

If UE supports *interFrequencyMeas-NoGap-r16* and the flag *interFrequencyConfig-NoGap-r16* is configured by the Network, UE is required to be capable of measuring without measurement gaps when the SSB is completely contained in the active bandwidth part of the UE. When any of the conditions in the following clauses is met, there are restrictions on the scheduling availability; otherwise, there is no scheduling restriction. Note that the SSB symbols to be measured in the following clauses are the SSB symbols indicated by SSB-ToMeasure [2], if it is configured; otherwise, all L SSB symbols within the SMTC window duration defined in clause 4.1 of TS 38.213 [3] are included.

The scheduling availability requirements when UE performs inter-frequency measurements without measurement gaps in a TDD bands on FR1 in clause 9.3C.7.3.1~9.3C.7.3.3 are valid under the following conditions:

- SFN and frame boundary across serving cell and inter-frequency neighbor cells is aligned, and
- the timing of SSBs across serving cell and inter-frequency neighbor cells are aligned

9.3C.7.3.1 Scheduling availability of UE performing measurements in TDD bands on FR1

When UE performs inter-frequency measurements without measurement gaps in a TDD band, the following restrictions apply due to SS-RSRP or SS-SINR measurement

- UE is not expected to transmit PUCCH/PUSCH/SRS on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration.

When UE performs inter-frequency measurements without measurement gaps in a TDD band, the following restrictions apply due to SS-RSRQ measurement

- UE is not expected to transmit PUCCH/PUSCH/SRS on SSB symbols to be measured, RSSI measurement symbols, and on 1 data symbol before each consecutive SSB to be measured/RSSI symbols and 1 data symbol after each consecutive SSB to be measured/RSSI symbols within SMTC window duration.

When TDD intra-band carrier aggregation is performed, the scheduling restrictions due to one serving cell should also apply to all other serving cells in the same band on the symbols that fully or partially overlap with aforementioned restricted symbols.

9.3C.7.3.2 Scheduling availability of UE performing measurements with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UE which do not support *simultaneousRxDataSSB-DiffNumerology-Inter-r16* [14] the following restrictions apply due to SS-RSRP/RSRQ/SINR measurement

- If UE performs inter-frequency measurements without measurement gaps in a TDD band, UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration.
- If UE performs inter-frequency measurements without measurement gaps in a FDD band, UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on all symbols within SMTC window duration.

When intra-band carrier aggregation is performed, the scheduling restrictions due to a given serving cell should also apply to all other serving cells in the same band on the symbols that fully or partially overlap with aforementioned restricted symbols.

9.4 Inter-RAT measurements

9.4.1 Introduction

The requirements in this clause are specified for NR−E-UTRAN FDD and NR−E-UTRAN TDD measurements and are applicable without an explicit E-UTRAN neighbour cell list containing physical layer cell identities, for a UE:

- in RRC_CONNECTED state, and
- configured
  - with SA or NR-DC operation mode or configured in NE-DC operation mode by PCell with NR−E-UTRAN FDD or TDD measurement (RSRP, RSRQ, RS-SINR, RSTD, or E-CID RSRP and RSRQ) on E-UTRA non-serving frequency carrier, or
  - with SA operation mode on NR carrier frequencies with CCA by PCell with NR−E-UTRAN FDD or TDD measurement (RSRP, RSRQ, RS-SINR) on E-UTRA non-serving frequency carrier, and
- configured with an appropriate measurement gap pattern according to Table 9.1.2-3.

The requirements in this clause for concurrent measurement gaps are only applied for UE in NR SA operation mode.

For UE supporting *eutra-NeedForGapNCSG-reporting-r17* and indicating *NeedForGapNCSG-InfoEUTRA* for inter-RAT measurement,

- An inter-RAT measurement is defined as measurement without gap if
  - the UE indicates ‘nogap-noncsg’ via *NeedForGapNCSG-InfoEUTRA* for the inter-RAT measurement
- An inter-RAT measurement is defined as measurement with NCSG if
  - the UE indicates ‘ncsg’ via *NeedForGapNCSG-InfoEUTRA* for the inter-RAT measurement

  When network configures measurement gap or NCSG, the delay requirements are specified in clause 9.4.2 and 9.4.3.
- An inter-RAT SSB measurement is defined as measurement with gap if
  - the UE indicates ‘gap’ via *NeedForGapNCSG-InfoEUTRA* for the inter-RAT measurement

  When network configures measurement gap, the delay requirements are specified in clauses 9.4.2 and 9.4.3.
- For inter-RAT measurements with NCSG, UE may cause scheduling restriction as specified in clause 9.4.3.5.

When the UE is in NE-DC operation mode and an NR–E-UTRAN FDD or TDD measurement (RSRP, RSRQ, RS-SINR, or E-CID RSRP and RSRQ) configured by NR PCell is on a E-UTRA serving frequency carrier, then the corresponding E-UTRA intra-frequency measurements requirements specified in clause 8.19 of TS 36.133 [15] shall apply.

When *highSpeedMeasFlag-r16* is configured but UE does not support either *measurementEnhancement-r16 or interRAT-MeasurementEnhancement-r16*, the UE is not required to meet the requirements specified in Table 9.4.2.3-2 and Table 9.4.3.3-2.

Editor's note: the exact signalling names in the above brackets and in Table 9.4.2.3-2 and Table 9.4.3.3-2 are subject to RAN2 definitions and the brackets shall be replaced by the correct signalling names according to RAN2 specification.

Parameter T_{Inter1} used in inter-RAT requirements in clause 9.4 is specified in Table 9.4.1-1 when measurement gap is used, and in Table 9.4.1-2 when NCSG is used.

Table 9.4.1-1: Minimum available time for inter-RAT measurements measurements when measurement gap is configured

Gap Pattern Id	MeasurementGap Length (MGL, ms)	Measurement Gap Repetition Period (MGRP, ms)	Minimum available time for inter-frequency and inter-RAT measurements during 480 ms period (Tinter1, ms)
0	6	40	60
1	6	80	30
2	3	40	24 Note 1
3	3	80	12 Note 1
4	6	20	120 Note 1
6	4	20	72 Note 1,3,6
7	4	40	36 Note 1,4,6
8	4	80	18 Note 1,5,6
10	3	20	48 Note 1

NOTE 1: When determining UE requirements using Tinter1 for gap pattern IDs 2, 3, 4, 6, 7, 8, 10, Tinter1 = 60 for gap pattern IDs 2, 4, 6, 7, 10, and Tinter1 = 30 for gap pattern IDs 3 and 8 shall be used.
NOTE 2: Measurement gaps pattern configurations applicability is as specified in Table 9.1.2-1.
NOTE 3: When this gap pattern is used, the T_{inter} for E-UTRA inter-frequency measurements is 48 ms corresponding to the first 3 ms of the 4 ms gap.
NOTE 4: When this gap pattern is used, the T_{inter} for E-UTRA inter-frequency measurements is 24 ms corresponding to the first 3 ms of the 4 ms gap.
NOTE 5: When this gap pattern is used, the T_{inter} for E-UTRA inter-frequency measurements is 12 ms corresponding to the first 3 ms of the 4 ms gap.
NOTE 6: This gap pattern is applicable for E-UTRA inter-frequency measurements only if gap based NR measurements are also configured.
NOTE 7: If multiple concurrent gaps are configured, the MGRP is the periodicity of the MG pattern associated to the E-UTRA inter-RAT frequency layers.

Table 9.4.1-2: Minimum available time for inter-RAT measurements when NCSG is configured

NCSG Pattern Id	Measurement Length (ML, ms)	Visible Interruption Repetition Period (VIRP, ms)	Minimum available time for inter-frequency and inter-RAT measurements during 480 ms period (Tinter1, ms)
0	5	40	60
1	5	80	30
2	2	40	24 Note 1
3	2	80	12 Note 1

4	5	20	120 Note 1
6	3	20	72 Note 1,3
7	3	40	36 Note 1,3
8	3	80	18 Note 1,3
10	2	20	48 Note 1
NOTE 1: When determining UE requirements using Tinter1 for NCSG pattern IDs 2, 3, 4, 6, 7, 8, 10, Tinter1 = 60 for NCSG pattern IDs 2, 4, 6, 7, 10, and Tinter1 = 30 for NCSG pattern IDs 3 and 8 shall be used. NOTE 2: NCSG pattern configurations applicability is as specified in Table 9.1.2C-1. NOTE 3: This NCSG pattern is applicable for E-UTRA inter-frequency measurements only if NCSG based NR measurements are also configured.			

A UE configured with gap/NCSG pattern ID 2, 3 or 10 shall be able to detect a target cell, provided that

- the E-UTRA subframe #0 or #5 of the target E-UTRAN cell begins not earlier than 500 μs from the start of the measurement gap, and

- the E-UTRA subframe #0 or #5 of the target E-UTRAN cell ends not later than 500 μs before the end of the measurement gap in case of FDD and not later than 750 μs before the end of measurement gap in case of TDD.

A UE configured with gap/NCSG pattern ID 6, 7 or 8 shall be able to detect a target cell, provided that

- the E-UTRA subframe #0 or #5 of the target E-UTRAN cell begins not earlier than 500 μs from the start of the measurement gap, and

- the E-UTRA subframe #0 or #5 of the target E-UTRAN cell ends no later than 1500 μs before the end of the measurement gap in case of FDD and no later than 1750 μs before the end of measurement gap in case of TDD.

9.4.2 NR − E-UTRAN FDD measurements

9.4.2.1 Introduction

The requirements are applicable for NR−E-UTRAN FDD RSRP, RSRQ, and RS-SINR measurements.

In the requirements, an E-UTRAN FDD cell is considered to be detectable when:

- RSRP related conditions in the accuracy requirements in clause 10.2.2 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.3 of TS 36.133 [15],

- RSRQ related conditions in the accuracy requirements in clause 10.2.3 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.3 of TS 36.133 [15],

- RS-SINR related conditions in the accuracy requirements in clause 10.2.5 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.19 of TS 36.133 [15].

9.4.2.2 Requirements when no DRX is used

When the UE requires measurement gaps or NCSG to identify and measure inter-RAT cells and an appropriate measurement gap pattern or NCSG is scheduled, or when the UE is capable of concurrent measurement gap patterns and concurrent measurement gap patterns are scheduled, or an appropriate pre-MG is scheduled and activated, or the UE supports capability of conducting such measurements without gaps, the UE shall be able to identify a new detectable FDD cell within $T_{\text{Identify, E-UTRAN FDD}}$ according to the following expression:

$$T_{\text{Identify,E-UTRAN FDD}} = T_{\text{BasicIdentify}} \cdot \frac{480}{T_{\text{Inter1}}} \cdot \text{CSSF}_{\text{interRAT}} \quad ms,$$

where:

$T_{\text{BasicIdentify}}$ = 480 ms,

T_{Inter1} is defined in clause 9.4.1,

$CSSF_{interRAT}$ = $CSSF_{within_gap,i}$ when measurement gaps are configured, or $CSSF_{within_ncsg,i}$ when NCSGs are configured, is the scaling factor for the measured inter-RAT E-UTRA carrier *i* which is calculated as specified in clause 9.1.5.2.

For a UE supporting and configured with concurrent measurement gaps, K_{gap_EUTRA}: it is the scaling factor for an E-UTRAN frequency layer to be measured within the associated measurement gap pattern. K_{gap} = 1 when the UE is not configured with concurrent measurement gaps. Otherwise, $K_{gap_EUTRA} = N_{total} / N_{available}$ for UE configured with concurrent measurement gaps.

For a window W of duration MGRP_max, where MGRP_max is the maximum MGRP across all configured per-UE measurement gap(s) and per-FR measurement gap(s) for FR1, and starting from the beginning of any associated gap occasion:

N_{total} is the total number of associated gap occasions within the window, including those dropped and non-dropped ocassions of the associated measurement gap within the window, and

$N_{available}$ is the number of non-dropped associated measurement gap occasions after accounting for collisions between the measurement gaps by applying the measurement gap collision rule in section 9.1.8.3.

Requirements do not apply for UE configured with concurrent measurement gaps, if $N_{available}$ =0

Identification of a cell shall include detection of the cell and additionally performing a single measurement with measurement period of $T_{Measure, E\text{-}UTRAN\ FDD}$ defined in Table 9.4.2.2-1.

Table 9.4.2.2-1: M**easurement period and measurement bandwidth**

Configuration	Physical Layer Measurement period: $T_{Measure, E\text{-}UTRAN\ FDD}$ [ms]	Measurement bandwidth [RB]
0	480 x [$CSSF_{interRAT}$ x Ceil(K_{gap_EUTRA})]	6
1 (Note 1)	240 x [$CSSF_{interRAT}$ x Ceil(K_{gap_EUTRA})]	50
NOTE 1: This configuration is optional. NOTE 2: K_{gap_EUTRA} is only applicable for a UE supporting concurrent measurement gaps. Otherwise K_{gap_EUTRA} =1		

When measurement gaps are scheduled for E-UTRAN FDD inter-RAT measurements, or the UE supports capability of conducting such measurements without gaps, the UE physical layer shall be capable of reporting RSRP, RSRQ, and RS-SINR measurements to higher layers with measurement period $T_{Measure, E\text{-}UTRAN\ FDD}$ given by table 9.4.2.2-1.

If higher layer filtering is used, an additional cell identification delay can be expected.

The NR – E-UTRAN FDD RSRP measurement accuracy for all measured cells shall be as specified in clause 10.2.2.
The NR – E-UTRAN FDD RSRQ measurement accuracy for all measured cells shall be as specified in clause 10.2.3.
The NR – E-UTRAN FDD RS-SINR measurement accuracy for all measured cells shall be as specified in clause 10.2.5.

9.4.2.3 Requirements when DRX is used

When DRX is in use and an appropriate measurement gap pattern or NCSG is configured, or when the UE is capable of concurrent measurement gap patterns and concurrent measurement gap patterns are configured, or an appropriate pre-MG is scheduled and activated, the UE shall be able to identify a new detectable E-UTRAN FDD cell within $T_{Identify, E\text{-}UTRAN\ FDD}$ specified in Table 9.4.2.3-1. When *highSpeedMeasFlag-r16* is configured and UE supports the enhanced inter-RAT E-UTRAN measurement requirements, the UE shall be able to identify a new detectable E-UTRAN FDD cell within $T_{Identify, E\text{-}UTRAN\ FDD}$ specified in Table 9.4.2.3-2.

For a UE supporting and configured with concurrent measurement gaps, K_{gap_EUTRA}: it is the scaling factor for an E-UTRAN frequency layer to be measured within the associated measurement gap pattern. K_{gap} = 1 when the UE is not configured with concurrent measurement gaps. Otherwise, $K_{gap_EUTRA} = N_{total} / N_{available}$ for UE configured with concurrent measurement gaps.

For a window W of duration MGRP_max, where MGRP_max is the maximum MGRP across all configured per-UE measurement gap(s) and per-FR measurement gap(s) for FR1, and starting from the beginning of any associated gap occasion:

N_{total} is the total number of associated gap occasions within the window, including those overlapped with other MG occasions within the window, and

$N_{available}$ is the number of non-dropped associated measurement gap occasions after accounting for collisions between the measurement gaps by applying the measurement gap collision rule in section 9.1.8.3.

Requirements do not apply for UE configured with concurrent measurement gaps, if $N_{available}$ =0

Table 9.4.2.3-1: Requirement to identify a newly detectable E-UTRAN FDD cell

DRX cycle length (s)	$T_{Identify,\ E\text{-}UTRAN\ FDD}$ (s) (DRX cycles)	
	Gap/NCSG period = 40 ms, 20 ms	Gap/NCSG period = 80 ms
≤0.16	Non-DRX requirements in clause 9.4.2.2 apply	Non-DRX requirements in clause 9.4.2.2 apply
0.256	5.12* $CSSF_{interRAT}$ x Ceil(K_{gap_EUTRA}) (20*$CSSF_{interRAT}$ x Ceil(K_{gap_EUTRA}))	7.68* $CSSF_{interRAT}$ x Ceil(K_{gap_EUTRA}) (30*$CSSF_{interRAT}$ x Ceil(K_{gap_EUTRA}))
0.32	6.4* $CSSF_{interRAT}$ x Ceil(K_{gap_EUTRA}) (20*$CSSF_{interRAT}$ x Ceil(K_{gap_EUTRA}))	7.68* $CSSF_{interRAT}$ x Ceil(K_{gap_EUTRA}) (24*$CSSF_{interRAT}$ x Ceil(K_{gap_EUTRA}))
0.32< DRX-cycle ≤10.24	Note1 (20*$CSSF_{interRAT}$ x Ceil(K_{gap_EUTRA}))	Note1 (20*$CSSF_{interRAT}$ x Ceil(K_{gap_EUTRA}))

NOTE 1: The time depends on the DRX cycle length.
NOTE 2: $CSSF_{interRAT}$ is as defined in clause 9.4.2.2.
NOTE 3: K_{gap_EUTRA} is only applicable for a UE supporting concurrent measurement gaps. Otherwise K_{gap_EUTRA} =1
NOTE 4: If multiple concurrent gaps are configured, the gap period is the periodicity of the MG pattern associated to the E-UTRA inter-RAT frequency layer.

Table 9.4.2.3-2: Requirement to identify a newly detectable E-UTRAN FDD cell when *highSpeedMeasFlag-r16* is configured

DRX cycle length (s)	$T_{Identify,\ E\text{-}UTRAN\ FDD}$ (s) (DRX cycles)	
	Gap/NCSG period = 40 ms, 20 ms	**Gap/NCSG period = 80 ms**
≤0.16	Non-DRX requirements in clause 9.4.2.2 apply	Non-DRX requirements in clause 9.4.2.2 apply
0.16<DRx cycle<=0.32	Note 1(15*$CSSF_{interRAT}$ x Ceil((K_{gap_EUTRA}))	
0.32<DRx cycle <= 0.64	Note 1(10*$CSSF_{interRAT}$ x Ceil(K_{gap_EUTRA}))	
DRx cycle = 1.024	Note 1(10*$CSSF_{interRAT}$ x Ceil(K_{gap_EUTRA}))	Note 1(10*$CSSF_{interRAT}$ x Ceil(K_{gap_EUTRA}))
DRx cycle = 1.28	Note 1(8*$CSSF_{interRAT}$ x Ceil(K_{gap_EUTRA}))	Note 1(8*$CSSF_{interRAT}$ x Ceil(K_{gap_EUTRA}))
1.28< DRX-cycle ≤10.24	Note1 (20*$CSSF_{interRAT}$ x Ceil(K_{gap_EUTRA}))	Note1 (20*$CSSF_{interRAT}$ x Ceil(K_{gap_EUTRA}))

NOTE 1: The time depends on the DRX cycle length.
NOTE 2: $CSSF_{interRAT}$ is as defined in clause 9.4.2.2.
NOTE 3: When *highSpeedMeasFlag-r16* is configured, the requirements apply only to UE supporting either *measurementEnhancement-r16* or *[interRAT-MeasurementEnhancement-r16].*
NOTE 4: K_{gap_EUTRA} is only applicable for a UE supporting concurrent measurement gaps. Otherwise K_{gap_EUTRA} =1
NOTE 5: If multiple concurrent gaps are configured, the gap period is the periodicity of the MG pattern associated to the E-UTRA inter-RAT frequency layer.

When DRX is in use, the UE shall be capable of performing NR – E-UTRAN FDD RSRP, RSRQ, and RS-SINR measurements of at least 4 identified E-UTRAN FDD cells per E-UTRA FDD frequency layer during each layer 1

measurement period, for up to 7 E-UTRA FDD carrier frequency layers, and the UE physical layer shall be capable of reporting NR – E-UTRAN FDD RSRP, RSRQ, and RS-SINR measurements to higher layers with the measurement period $T_{measure, E\text{-}UTRAN\ FDD}$ specified in Table 9.4.2.3-2.

Table 9.4.2.3-2: Requirement to measure E-UTRAN FDD cells

DRX cycle length (s)	$T_{measure, E\text{-}UTRAN\ FDD}$ (s) (DRX cycles)
≤0.08	Non-DRX requirements in clause 9.4.2.2 apply
0.08< DRX-cycle ≤10.24	Note1 (5* $CSSF_{interRAT}$ x Ceil(K_{gap_EUTRA}))
NOTE 1: The time depends on the DRX cycle length. NOTE 2: $CSSF_{interRAT}$ is as defined in clause 9.4.2.2. NOTE 3: K_{gap_EUTRA} is only applicable for a UE supporting concurrent measurement gaps. Otherwise K_{gap_EUTRA} =1	

If higher layer filtering is used, an additional cell identification delay can be expected.

The NR – E-UTRAN FDD RSRP measurement accuracy for all measured cells shall be as specified in clause 10.2.2.
The NR – E-UTRAN FDD RSRQ measurement accuracy for all measured cells shall be as specified in clause 10.2.3.
The NR – E-UTRAN FDD RS-SINR measurement accuracy for all measured cells shall be as specified in clause 10.2.5.

9.4.2.4 Measurement reporting requirements

9.4.2.4.1 Periodic Reporting

The reported NR – E-UTRAN FDD RSRP, RSRQ, and RS-SINR measurements contained in periodically triggered measurement reports shall meet the requirements in clauses 10.2.2, 10.2.3, and 10.2.5, respectively.

9.4.2.4.2 Event-Triggered Periodic Reporting

The reported NR – E-UTRAN FDD RSRP, RSRQ, and RS-SINR measurements contained in event-triggered periodic measurement reports shall meet the requirements in clauses 10.2.2, 10.2.3, and 10.2.5, respectively.

The first report in event-triggered periodic measurement reporting shall meet the requirements specified in clause 9.4.2.4.3.

9.4.2.4.3 Event-Triggered Reporting

The reported NR – E-UTRAN FDD RSRP, RSRQ, and RS-SINR measurements contained in event-triggered measurement reports shall meet the requirements in clauses 10.2.2, 10.2.3, and 10.2.5, respectively.

The UE shall not send any event-triggered measurement reports as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: 2 x TTI_{DCCH} where TTI_{DCCH} is the duration of subframe or slot or subslot when the measurement report is transmitted on the PUSCH with subframe or slot or subslot duration. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{Identify, E\text{-}UTRAN\ FDD}$ defined in clauses 9.4.2.2 and 9.4.2.3 without DRX and with DRX, respectively. When L3 filtering is used, an additional delay can be expected.

If a cell which has been detectable at least for the time period $T_{Identify, E\text{-}UTRAN\ FDD}$ becomes undetectable for a period ≤ 5 seconds and then the cell becomes detectable again and triggers an event as per TS 38.331 [2], the event triggered measurement reporting delay shall be less than $T_{Measure, E\text{-}UTRAN\ FDD}$ provided the timing to that cell has not changed more than ± 50 Ts while measurement gap or NCSG has not been available and the L3 filter has not been used.

9.4.3 NR − E-UTRAN TDD measurements

9.4.3.1 Introduction

The requirements are applicable for NR−E-UTRAN TDD RSRP, RSRQ, and RS-SINR measurements.

In the requirements, an E-UTRAN TDD cell is considered to be detectable when:

- RSRP related conditions in the accuracy requirements in clause 10.2.2 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.3 of TS 36.133 [15],
- RSRQ related conditions in the accuracy requirements in clause 10.2.3 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.3 of TS 36.133 [15],

  RS-SINR related conditions in the accuracy requirements in clause 10.2.5 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.19 of TS 36.133 [15].

9.4.3.2 Requirements when no DRX is used

When the UE requires measurement gaps or NCSG to identify and measure inter-RAT cells and an appropriate measurement gap pattern or NCSG is scheduled, or when the UE is capable of concurrent measurement gap patterns and concurrent measurement gap patterns are scheduled, or an appropriate pre-MG is scheduled and activated or the UE supports capability of conducting such measurements without gaps, the UE shall be able to identify a new detectable TDD cell within $T_{\text{Identify, E-UTRAN TDD}}$ according to the following expression:

- When configuration 0 or configuration 1 in Table 9.4.3.2-1 is applied,

$$T_{\text{Identify,E-UTRAN TDD}} = T_{\text{BasicIdentify}} \cdot \frac{480}{T_{\text{Inter1}}} \cdot \text{CSSF}_{\text{interRAT}} \quad ms,$$

- When configuration 2 or configuration 3 in Table 9.4.3.2-1 is applied,

$$T_{\text{Identify,E-UTRAN TDD}} = T_{\text{BasicIdentify}} \cdot \frac{480}{T_{\text{Inter1}}} \cdot \text{CSSF}_{\text{interRAT}} + 240 \cdot \text{CSSF}_{\text{interRAT}} \quad ms,$$

where:

$T_{\text{BasicIdentify}}$ = 480 ms,

T_{Inter1} is defined in clause 9.4.1,

$\text{CSSF}_{\text{interRAT}} = \text{CSSF}_{\text{within_gap,i}}$ when measurement gaps are configured, or $\text{CSSF}_{\text{within_ncsg,i}}$ when NCSGs are configured, is the scaling factor for the measured inter-RAT E-UTRA carrier *i* which is calculated as specified in clause 9.1.5.2.

For a UE supporting and configured with concurrent measurement gaps, $K_{\text{gap_EUTRA}}$: it is the scaling factor for an E-UTRAN frequency layer to be measured within the associated measurement gap pattern. $K_{\text{gap}} = 1$ when the UE is not configured with concurrent measurement gaps. Otherwise, $K_{\text{gap_EUTRA}} = N_{\text{total}} / N_{\text{available}}$ for UE configured with concurrent measurement gaps.

- For a window W of duration MGRP_max, where MGRP_max is the maximum MGRP across all configured per-UE measurement gap(s) and per-FR measurement gap(s) for FR1, and starting from the beginning of any associated gap occasion:
  - N_{total} is the total number of associated gap occasions within the window, including those dropped and non-dropped ocassions of the associated measurement gap within the window, and
  - $N_{\text{available}}$ is the number of non-dropped associated measurement gap occasions after accounting for collisions between the measurement gaps by applying the measurement gap collision rule in section 9.1.8.3.
- Requirements do not apply for UE configured with concurrent measurement gaps, if $N_{\text{available}} = 0$

Identification of a cell shall include detection of the cell and additionally performing a single measurement with measurement period of $T_{\text{Measure, E-UTRAN TDD}}$ defined in Table 9.4.3.2-1.

Table 9.4.3.2-1: $T_{Measure,\ E\text{-}UTRAN\ TDD}$ for different configurations

Configuration	Measurement bandwidth (RB)	Number of UL/DL sub-frames per half frame (5 ms)		DwPTS		$T_{Measure,\ E\text{-}UTRAN\ TDD}$ (ms)
		DL	UL	Normal CP	Extended CP	
0	6	2	2	$19760 \cdot T_s$	$20480 \cdot T_s$	480 x $CSSF_{interRAT}$ x Ceil(K_{gap_EUTRA})
1 (Note 1)	50	2	2	$19760 \cdot T_s$	$20480 \cdot T_s$	240 x $CSSF_{interRAT}$ x Ceil(K_{gap_EUTRA})
2	6	1	3	$19760 \cdot T_s$	$20480 \cdot T_s$	720 x $CSSF_{interRAT}$ x Ceil(K_{gap_EUTRA})
3 (Note 1)	50	1	3	$19760 \cdot T_s$	$20480 \cdot T_s$	480 x $CSSF_{interRAT}$ x Ceil(K_{gap_EUTRA})

NOTE 1: This configuration is optional.
NOTE 2: Void
NOTE 3: K_{gap_EUTRA} is only applicable for a UE supporting concurrent measurement gaps. Otherwise K_{gap_EUTRA} =1

When measurement gaps are scheduled for E-UTRAN TDD inter-RAT measurements, or the UE supports capability of conducting such measurements without gaps, the UE physical layer shall be capable of reporting RSRP, RSRQ, and RS-SINR measurements to higher layers with measurement period $T_{measure,\ E\text{-}UTRAN\ TDD}$ given by table 9.4.3.2-1.

If higher layer filtering is used, an additional cell identification delay can be expected.

The NR – E-UTRAN TDD RSRP measurement accuracy for all measured cells shall be as specified in clause 10.2.2.
The NR – E-UTRAN TDD RSRQ measurement accuracy for all measured cells shall be as specified in clause 10.2.3.
The NR – E-UTRAN TDD RS-SINR measurement accuracy for all measured cells shall be as specified in clause 10.2.5.

9.4.3.3 Requirements when DRX is used

When DRX is in use and an appropriate measurement gap pattern or NCSG is configured, or when the UE is capable of concurrent measurement gap patterns and concurrent measurement gap patterns are configured, or an appropriate pre-MG is scheduled and activated, the UE shall be able to identify a new detectable E-UTRAN TDD cell within $T_{Identify,\ E\text{-}UTRAN\ TDD}$ specified in Table 9.4.3.3-1. When *highSpeedMeasFlag-r16* is configured and UE supports the enhanced inter-RAT E-UTRAN measurement requirements, the UE shall be able to identify a new detectable E-UTRAN TDD cell within $T_{Identify,\ E\text{-}UTRAN\ TDD}$ specified in Table 9.4.3.3-2.

For a UE supporting and configured with concurrent measurement gaps, K_{gap_EUTRA}: it is the scaling factor for an E-UTRAN frequency layer to be measured within the associated measurement gap pattern. K_{gap} = 1 when the UE is not configured with concurrent measurement gaps. Otherwise, $K_{gap_EUTRA} = N_{total} / N_{available}$ for UE configured with concurrent measurement gaps.

For a window W of duration MGRP_max, where MGRP_max is the maximum MGRP across all configured per-UE measurement gap(s) and per-FR measurement gap(s) for FR1, and starting from the beginning of any associated gap occasion:

N_{total} is the total number of associated gap occasions within the window, including those overlapped with other MG occasions within the window, and

$N_{available}$ is the number of non-dropped associated measurement gap occasions after accounting for collisions between the measurement gaps by applying the measurement gap collision rule in section 9.1.8.3.

Requirements do not apply for UE configured with concurrent measurement gaps, if $N_{available}$ =0

Table 9.4.3.3-1: Requirement to identify a newly detectable E-UTRAN TDD cell

DRX cycle length (s)	$T_{Identify,\ E\text{-}UTRAN\ TDD}$ (s) (DRX cycles)	
	Gap/NCSG period = 40 ms, 20 ms	Gap/NCSG period = 80 ms
≤0.16	Non-DRX requirements in clause 9.4.3.2 apply	Non-DRX requirements in clause 9.4.3.2 apply
0.256	5.12* $CSSF_{interRAT}$ x Ceil(K_{gap_EUTRA}) (20*$CSSF_{interRAT}$ x Ceil(K_{gap_EUTRA}))	7.68* $CSSF_{interRAT}$ x Ceil(K_{gap_EUTRA}) (30*$CSSF_{interRAT}$ x Ceil(K_{gap_EUTRA}))
0.32	6.4* $CSSF_{interRAT}$ x Ceil(K_{gap_EUTRA}) (20*$CSSF_{interRAT}$ x Ceil(K_{gap_EUTRA}))	7.68* $CSSF_{interRAT}$ x Ceil(K_{gap_EUTRA}) (24*$CSSF_{interRAT}$ x Ceil(K_{gap_EUTRA}))
0.32< DRX-cycle ≤10.24	Note1 (20*$CSSF_{interRAT}$ x Ceil(K_{gap_EUTRA}))	Note1 (20*$CSSF_{interRAT}$ x Ceil(K_{gap_EUTRA}))

NOTE 1: The time depends on the DRX cycle length.
NOTE 2: $CSSF_{interRAT}$ is as defined in clause 9.4.3.2.
NOTE 3: K_{gap_EUTRA} is only applicable for a UE supporting concurrent measurement gaps. Otherwise K_{gap_EUTRA} =1
NOTE 4: If multiple concurrent gaps are configured, the gap period is the periodicity of the MG pattern associated to the E-UTRA inter-RAT frequency layer.

Table 9.4.3.3-2: Requirement to identify a newly detectable E-UTRAN TDD cell when *highSpeedMeasFlag-r16* is configured

DRX cycle length (s)	$T_{Identify,\ E\text{-}UTRAN\ TDD}$ (s) (DRX cycles)	
	Gap/NCSG period = 40 ms, 20 ms	**Gap/NCSG period = 80 ms**
≤0.16	Non-DRX requirements in clause 9.4.3.2 apply	Non-DRX requirements in clause 9.4.3.2 apply
0.16<DRx cycle<=0.32	Note 1(15*$CSSF_{interRAT}$ x Ceil(K_{gap_EUTRA}))	
0.32<DRx cycle <= 0.64	Note 1(10*$CSSF_{interRAT}$ x Ceil(K_{gap_EUTRA}))	
DRx cycle = 1.024	Note 1(10*$CSSF_{interRAT}$ x Ceil(K_{gap_EUTRA}))	Note 1(10*$CSSF_{interRAT}$ x Ceil(K_{gap_EUTRA}))
DRx cycle = 1.28	Note 1(8*$CSSF_{interRAT}$ x Ceil(K_{gap_EUTRA}))	Note 1(8*$CSSF_{interRAT}$ x Ceil(K_{gap_EUTRA}))
1.28< DRX-cycle ≤10.24	Note1 (20*$CSSF_{interRAT}$ x Ceil(K_{gap_EUTRA}))	Note1 (20*$CSSF_{interRAT}$ x Ceil(K_{gap_EUTRA}))

NOTE 1: The time depends on the DRX cycle length.
NOTE 2: $CSSF_{interRAT}$ is as defined in clause 9.4.3.2.
NOTE 3: When *highSpeedMeasFlag-r16* is configured, the requirements apply only to UE supporting either *measurementEnhancement-r16* or *[interRAT-MeasurementEnhancement-r16].*
NOTE 4: K_{gap_EUTRA} is only applicable for a UE supporting concurrent measurement gaps. Otherwise K_{gap_EUTRA} =1
NOTE 5: If multiple concurrent gaps are configured, the gap period is the periodicity of the MG pattern associated to the E-UTRA inter-RAT frequency layer.

When DRX is in use, the UE shall be capable of performing NR – E-UTRAN TDD RSRP, RSRQ, and RS-SINR measurements of at least 4 identified E-UTRAN TDD cells per E-UTRA TDD frequency layer during each layer 1 measurement period, for up to 7 E-UTRA TDD carrier frequency layers, and the UE physical layer shall be capable of reporting NR – E-UTRAN TDD RSRP, RSRQ, and RS-SINR measurements to higher layers with the measurement period $T_{measure,\ E\text{-}UTRAN\ TDD}$ specified in Table 9.4.3.3-3.

Table 9.4.3.3-3: Requirement to measure E-UTRAN TDD cells

DRX cycle length (s)	$T_{measure,\ E\text{-}UTRAN\ TDD}$ (s) (DRX cycles)
≤0.08	Non-DRX Requirements in clause 9.4.3.2 apply

0.128	For configuration 2 [Note3], non-DRX requirements in clause 9.4.3.2 apply, Otherwise: Note1 ($5*CSSF_{interRAT}$ x $Ceil(K_{gap_EUTRA})$)
0.128<DRX-cycle≤10.24	Note1 ($5*CSSF_{interRAT}$ x $Ceil(K_{gap_EUTRA})$)
NOTE 1: The time depends on the DRX cycle length. NOTE 2: $CSSF_{interRAT}$ is as defined in clause 9.4.3.2. NOTE 3: See Table 9.4.3.2-1. NOTE 4: K_{gap_EUTRA} is only applicable for a UE supporting concurrent measurement gaps. Otherwise K_{gap_EUTRA} =1	

If higher layer filtering is used, an additional cell identification delay can be expected.

The NR – E-UTRAN TDD RSRP measurement accuracy for all measured cells shall be as specified in clause 10.2.2.
The NR – E-UTRAN TDD RSRQ measurement accuracy for all measured cells shall be as specified in clause 10.2.3.
The NR – E-UTRAN TDD RS-SINR measurement accuracy for all measured cells shall be as specified in clause 10.2.5.

9.4.3.4 Measurement reporting requirements

9.4.3.4.1 Periodic Reporting

The reported NR – E-UTRAN TDD RSRP, RSRQ, and RS-SINR measurements contained in periodically triggered measurement reports shall meet the requirements in clauses 10.2.2, 10.2.3, and 10.2.5, respectively.

9.4.3.4.2 Event-Triggered Periodic Reporting

The reported NR – E-UTRAN TDD RSRP, RSRQ, and RS-SINR measurements contained in event-triggered periodic measurement reports shall meet the requirements in clauses 10.2.2, 10.2.3, and 10.2.5, respectively.

The first report in event-triggered periodic measurement reporting shall meet the requirements specified in clause 9.4.3.4.3.

9.4.3.4.3 Event-Triggered Reporting

The reported NR – E-UTRAN TDD RSRP, RSRQ, and RS-SINR measurements contained in event-triggered measurement reports shall meet the requirements in clauses 10.2.2, 10.2.3, and 10.2.5, respectively.

The UE shall not send any event-triggered measurement reports as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: 2 x TTI_{DCCH} where TTI_{DCCH} is the duration of subframe or slot or subslot when the measurement report is transmitted on the PUSCH with subframe or slot or subslot duration. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{Identify,\ E\text{-}UTRAN\ TDD}$ defined in clauses 9.4.3.2 and 9.4.3.3 without DRX and with DRX, respectively. When L3 filtering is used, an additional delay can be expected.

If a cell which has been detectable at least for the time period $T_{Identify,\ E\text{-}UTRAN\ TDD}$ becomes undetectable for a period ≤ 5 seconds and then the cell becomes detectable again and triggers an event as per TS 38.331 [2], the event triggered measurement reporting delay shall be less than $T_{Measure,\ E\text{-}UTRAN\ TDD}$ provided the timing to that cell has not changed more than $\pm$ 50 Ts while measurement gap or NCSG has not been available and the L3 filter has not been used.

9.4.3.5 Scheduling Availability During NR − E-UTRAN TDD measurements with NCSG

[When UE supports *simultaneousRxTxInterBandENDC* for a band combination, no scheduling restriction is applicable to NR − E-UTRAN TDD measurements with NCSG in this band combination; otherwise UE is not expected to transmit PUCCH/PUSCH/SRS on all symbols within NCSG ML.]

9.4.4 Inter-RAT RSTD measurements

9.4.4.1 NR − E-UTRAN FDD RSTD measurements

9.4.4.1.1 Introduction

The requirements are applicable for NR−E-UTRAN FDD RSTD measurements requested via LPP [22, 27].

When the UE is in NE-DC operation mode and an NR−E-UTRAN FDD RSTD measurement configured by NR PCell is on a E-UTRA serving frequency carrier, then the corresponding E-UTRA intra-frequency measurements requirements as follows shall apply.

- Measurements configured on E-UTRA PSCC shall meet E-UTRAN OTDOA intra-frequency measurements requirements in clause 8.1.2.5. The applicable measurement accuracy requirements are in clause 9.1.10.
- Measurements configured on E-UTRA SCC shall meet all applicable requirements in clause 8.4, except that the terms PCell and primary component carrier shall be deemed to be swapped with PSCell and PSCC. The applicable measurement accuracy requirements are in clause 9.1.12, except that the terms PCell and primary component carrier shall be deemed to be swapped with PSCell and PSCC.

The requirements in clause 9.4.4.1 apply when:

- the UE is provided with the LTE timing information via LPP [27], including both *nr-LTE-SFN-Offset* and *nr-LTE-fineTiming-Offset*, or
- the UE is not provided with *nr-LTE-SFN-Offset* or *nr-LTE-fineTiming-Offset*, or
- the UE is provided with *nr-LTE-SFN-Offset* but not with *nr-LTE-fineTiming-Offset*.

When the UE is not aware of the SFN of at least one LTE cell in the OTDOA assistance data, the UE may be using autonomous gaps to acquire SFN of the OTDOA assistance data reference cell prior to requesting measurement gaps for performing the requested E-UTRA RSTD measurements before the $T_{\text{RSTD InterRAT, E-UTRAN FDD}}$ time period starts while meeting all the requirements in clause 9.4.4.1.2, provided that the OTDOA assistance data is provided to allow sufficient time for the UE to acquire the SFN before the $T_{\text{RSTD InterRAT, E-UTRAN FDD}}$ starts.

When the UE is not aware of and cannot derive the subframe timing difference between the NR serving cell and the OTDOA assistance data reference cell, the UE may need to request measurement gaps to perform cell detection for the OTDOA assistance data reference cell prior to requesting measurement gaps for performing the requested E-UTRA RSTD measurements before the $T_{\text{RSTD InterRAT, E-UTRAN FDD}}$ time period starts while meeting all the requirements in clause 9.4.4.1.2, provided that the OTDOA assistance data is provided to allow sufficient time for the UE to detect the cell before the $T_{\text{RSTD InterRAT, E-UTRAN FDD}}$ starts.

9.4.4.1.2 Requirements

When the physical layer cell identities of neighbour cells together with the OTDOA assistance data are provided, the UE shall be able to detect and measure inter-RAT E-UTRAN FDD RSTD, specified in TS 38.215 [4], for at least n=16 cells, including the reference cell, within $T_{\text{RSTD InterRAT, E-UTRAN FDD}}$ ms as given below:

$$T_{\text{RSTD InterRAT, E-UTRAN FDD}} = T_{\text{PRS}} \cdot (M - 1) + \Delta \quad ms,$$

where

$T_{\text{RSTD InterRAT, E-UTRAN FDD}}$ is the total time for detecting and measuring at least *n* cells,

T_{PRS} is the largest value of the cell-specific positioning subframe configuration period, defined in TS 36.211 [23], among the measured *n* cells including the reference cell,

M is the number of PRS positioning occasions as defined in Table 9.4.4.1.2-1, where each PRS positioning occasion comprises of N_{PRS} ($1 \le N_{PRS} \le 6$) consecutive downlink positioning subframes defined in TS 36.211 [23],

$CSSF_{interRAT}=CSSF_{within_gap,i}$ is the scaling factor determined by the gap sharing scheme for the RSTD measurements on the carrier frequency *i* as defined in clause 9.1.5.2,

$\Delta = 160 \cdot \left\lceil \frac{n}{M} \right\rceil$ ms is the measurement time for a single PRS positioning occasion which includes the sampling time and the processing time, and

the *n* cells are distributed on up to two E-UTRAN FDD carrier frequencies.

Table 9.4.4.1.2-1: Number of PRS positioning occasions within $T_{\text{RSTD InterRAT, E-UTRAN FDD}}$

Positioning subframe configuration period, T_{PRS}	Number of PRS positioning occasions, M	
	f2 Note1	f1 and f2 Note2
160 ms	16 × $CSSF_{interRAT}$	32 × $CSSF_{interRAT}$
>160 ms	8 × $CSSF_{interRAT}$	16 × $CSSF_{interRAT}$
NOTE 1: When inter-RAT E-UTRAN FDD RSTD measurements are performed over the reference cell and neighbour cells, which belong to the E-UTRAN FDD carrier frequency f2.		
NOTE 2: When inter-RAT E-UTRAN FDD RSTD measurements are performed over the reference cell and the neighbour cells, which belong to the E-UTRAN FDD carrier frequency f1 and the E-UTRAN FDD carrier frequency f2 respectively.		

The UE physical layer shall be capable of reporting RSTD for the reference cell and all the neighbor cells *i* out of at least (*n*-1) neighbor cells within $T_{\text{RSTD InterRAT, E-UTRAN FDD}}$ provided:

$\left(\text{PRS}\,\hat{E}_s / \text{Iot}\right)_{ref}$ ≥-6 dB for all Frequency Bands for the reference cell,

$\left(\text{PRS}\,\hat{E}_s / \text{Iot}\right)_i$ ≥-13 dB for all Frequency Bands for neighbour cell *i*,

$\left(\text{PRS}\,\hat{E}_s / \text{Iot}\right)_{ref}$ and $\left(\text{PRS}\,\hat{E}_s / \text{Iot}\right)_i$ conditions apply for all subframes of at least $L = \frac{M}{2}$ PRS positioning occasions,

PRP $1,2|_{\text{dBm}}$ according to TS 36.133 [15, Annex B.2.6] for a corresponding Band,

$\text{PRS}\,\hat{E}_s / \text{Iot}$ is defined as the ratio of the average received energy per PRS resource element during the useful part of the symbol to the average received power spectral density of the total noise and interference for this resource element, where the ratio is measured over all resource elements which carry PRS.

The time $T_{\text{RSTD InterRAT, E-UTRAN FDD}}$ starts from the first subframe of the PRS positioning occasion closest in time after both the *OTDOA-RequestLocationInformation* message and the OTDOA assistance data in the *OTDOA-ProvideAssistanceData* message via LPP as specified in TS 38.305 [22], are delivered to the physical layer of the UE.

The RSTD measurement accuracy for all measured neighbor cells *i* shall be fulfilled according to the accuracy as specified in clause 10.2.4.

9.4.4.1.2.1 RSTD Measurement Reporting Delay

This requirement assumes that the measurement report is not delayed by other LPP signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of

the uplink DCCH. The delay uncertainty is: 2 x TTI_{DCCH} where TTI_{DCCH} is the duration of subframe or slot or subslot when the measurement report is transmitted on the PUSCH with subframe or slot or subslot duration. This measurement reporting delay excludes any delay caused by no UL resources for UE to send the measurement report.

9.4.4.1.2.2 Requirements for acquiring the timing of the E-UTRA OTDOA reference cell

When the UE is not aware of the SFN of at least one LTE cell in the OTDOA assistance data, the UE supporting per-FR gaps may make autonomous gaps in downlink reception and uplink transmission of the PCell, PSCell, and each of the SCells in FR1 for acquiring SFN of the reference cell in the E-UTRA OTDOA assistance data, while no autonomous gaps in downlink reception or uplink transmission are allowed in any of the UE serving cells in FR2. The UE, which are only supporting per-UE gaps, may make autonomous gaps in downlink reception and uplink transmission of the PCell, PSCell, and each of the SCells for acquiring the SFN of the reference cell in the E-UTRA OTDOA assistance data.

When the UE is not aware of and cannot derive the subframe timing difference between the NR serving cell and the OTDOA assistance data reference cell, the UE may need to request measurement gaps while indicating *eutra-FineTimingDetection* according to TS 38.331 [2] for detecting the reference cell in the E-UTRA OTDOA assistance data.

When the UE is performing one or both of SFN acquisition or cell detection as specified above, the UE shall be able to determine the timing of the E-UTRA OTDOA assistance data reference cell during the time period

$$T_{RefCell,E\text{-}UTRAN} = T_{Detect,\ E\text{-}UTRAN\ FDD} + T_{MIB} + T_{ECGI}\ ,$$

where

$T_{Detect,\ E\text{-}UTRAN\ FDD} = T_{Identify,\ E\text{-}UTRAN\ FDD} - T_{measure,\ E\text{-}UTRAN\ FDD}$ is according to clause 9.4.2 assuming $CSSF_{interRAT}$=1 and it is the time needed to detect the E-UTRA OTDOA assistance data reference cell when the UE needs to acquire the subframe and slot timing of the cell, provided the UE is configured with measurement gaps ($T_{Detect,\ E\text{-}UTRAN\ FDD}$=0 when both *nr-LTE-SFN-Offset* and *nr-LTE-fineTiming-Offset* are provided in the E-UTRA OTDOA assistance data or the E-UTRA OTDOA assistance data reference cell is known to the UE), and

T_{MIB} = 50 ms is the time required to acquire SFN and/or PHICH configuration of the E-UTRA OTDOA assistance data reference cell provided the OTDOA assistance data reference cell is decodable and at least all E-UTRA subframes #0 during T_{MIB} are available at the UE receiver (T_{MIB}=0 when *nr-LTE-SFN-Offset* is provided in the E-UTRA OTDOA assistance data and ECGI acquisition is not needed), and

T_{ECGI} = 100 ms is the time required to acquire ECGI of the E-UTRA OTDOA assistance data reference cell when *cellGlobalId* is included in *OTDOA-ReferenceCellInfo* and the UE is not aware of the ECGI of this cell (T_{ECGI} = 0 when *cellGlobalId* is not included in *OTDOA-ReferenceCellInfo* or the UE is aware of the ECGI of the E-UTRA OTDOA assistance data reference cell).

When detecting the E-UTRAN OTDOA reference cell, the requirements in this clause shall be met, provided the conditions for the detectable cell are fulfilled according to clause 9.4.2.1. In addition, the MIB of the E-UTRA OTDOA reference cell whose SFN is acquired shall be considered decodable by the UE provided the PBCH demodulation requirements are met according to TS 36.101 [25].

The requirement for acquiring the timing of the E-UTRA OTDOA reference cell within $T_{RefCell,E\text{-}UTRAN}$ is applicable when no DRX is used as well as when any of the DRX cycles specified in TS 38.331 [2] is used.

When T_{MIB}>0 and UE is using autonomous gaps during T_{MIB}, the UE shall transmit at least $N_{ACK/NACK,\ MIB,\ FDD}$ ACK/NACKs on PCell, PSCell, and each of activated SCell(s) in the frequency range where the autonomous gaps are created, specified in Table 9.4.4.1.2.2-1. When both T_{MIB}>0 and T_{ECGI}>0 and UE is using autonomous gaps during T_{MIB}+T_{ECGI}, the UE shall transmit on PCell, PSCell, and each of activated SCell(s) in the frequency range where autonomous gaps are created at least $N_{ACK/NACK,\ MIB+ECGI,\ FDD}$ ACK/NACKs specified in Table 9.4.4.1.2.2-3, provided the OTDOA reference cell bandwidth is configured in the OTDOA assistance data [22, 27]. The requirements in Tables 9.4.4.1.2.2-1, 9.4.4.1.2.2-2, and 9.4.4.1.2.2-3 apply, provided that:

- there is continuous DL data allocation,
- no DRX cycle is used,
- no measurement gaps are configured,
- only one code word is transmitted in each slot,

- 2 slot ACK/NACK feedback is configured,
- 20 ms SMTC period is configured,
- SSBs are transmitted in one slot within SMTC window.

Table 9.4.4.1.2.2-2: Void

Table 9.4.4.1.2.2-2: Number of ACK/NACKs transmitted by the UE during T_{ECGI}

$N_{ACK/NACK, ECGI, FDD}$	Configuration of the serving cell in which the transmitted ACK/NACKs are counted	
	Duplex mode configuration	SCS
66	FDD	15 kHz
145	FDD	30 kHz
298	FDD	60 kHz
28	TDD Note 1	15 kHz
67	TDD Note 1	30 kHz
144	TDD Note 1	60 kHz
175	TDD Note 2	60 kHz
363	TDD Note 2	120 kHz
NOTE 1: TDD UL-DL configuration is as specified in Table A.3.3.1-1 of TS 38.101-1 [18]. NOTE 2: TDD UL-DL configuration is as specified in Table A.3.3.1-1 of TS 38.101-2 [19].		

Table 9.4.4.1.2.2-3: Number of ACK/NACKs transmitted by the UE during T_{MIB}+T_{ECGI}

$N_{ACK/NACK, MIB+ECGI, FDD}$	Configuration of the serving cell in which the transmitted ACK/NACKs are counted	
	Duplex mode configuration	SCS
84	FDD	15 kHz
193	FDD	30 kHz
402	FDD	60 kHz
28	TDD Note 1	15 kHz
81	TDD Note 1	30 kHz
159	TDD Note 1	60 kHz
233	TDD Note 2	60 kHz
491	TDD Note 2	120 kHz
NOTE 1: TDD UL-DL configuration is as specified in Table A.3.3.1-1 of TS 38.101-1 [18]. NOTE 2: TDD UL-DL configuration is as specified in Table A.3.3.1-1 of TS 38.101-2 [19].		

9.4.4.2 NR − E-UTRAN TDD RSTD measurements

9.4.4.2.1 Introduction

The requirements are applicable for NR−E-UTRAN TDD RSTD measurements requested via LPP [22, 27].

When the UE is in NE-DC operation mode and an NR−E-UTRAN TDD RSTD measurement configured by NR PCell is on a E-UTRA serving frequency carrier, then the corresponding E-UTRA intra-frequency measurements requirements as follows shall apply.

- Measurements configured on E-UTRA PSCC shall meet E-UTRAN OTDOA intra-frequency measurements requirements in clause 8.1.2.5. The applicable measurement accuracy requirements are in clause 9.1.10.
- Measurements configured on E-UTRA SCC shall meet all applicable requirements in clause 8.4, except that the terms PCell and primary component carrier shall be deemed to be swapped with PSCell and PSCC. The applicable measurement accuracy requirements are in clause 9.1.12, except that the terms PCell and primary component carrier shall be deemed to be swapped with PSCell and PSCC.

The requirements in clause 9.4.4.1 apply when:

- the UE is provided with the LTE timing information via LPP [27], including both *nr-LTE-SFN-Offset* and *nr-LTE-fineTiming-Offset*, or
- the UE is not provided with *nr-LTE-SFN-Offset* or *nr-LTE-fineTiming-Offset*, or
- the UE is provided with *nr-LTE-SFN-Offset* but not with *nr-LTE-fineTiming-Offset*.

When the UE is not aware of the SFN of at least one LTE cell in the OTDOA assistance data, the UE may be using autonomous gaps to acquire SFN of the OTDOA assistance data reference cell prior to requesting measurement gaps for performing the requested E-UTRA RSTD measurements before the $T_{\text{RSTD InterRAT, E-UTRAN TDD}}$ time period starts while meeting all the requirements in clause 9.4.4.2.2, provided that the OTDOA assistance data is provided to allow sufficient time for the UE to acquire the SFN before the $T_{\text{RSTD InterRAT, E-UTRAN TDD}}$ starts. When the UE is not aware of and cannot derive the subframe timing difference between the NR serving cell and the OTDOA assistance data reference cell, the UE may need to request measurement gaps to perform cell detection for the OTDOA assistance data reference cell prior to requesting measurement gaps for performing the requested E-UTRA RSTD measurements before the $T_{\text{RSTD InterRAT, E-UTRAN TDD}}$ time period starts while meeting all the requirements in clause 9.4.4.2.2, provided that the OTDOA assistance data is provided to allow sufficient time for the UE to detect the cell before the $T_{\text{RSTD InterRAT, E-UTRAN TDD}}$ starts.

9.4.4.2.2 Requirements

When the physical layer cell identities of neighbour cells together with the OTDOA assistance data are provided, the UE shall be able to detect and measure inter-RAT -UTRAN TDD RSTD, specified in TS 38.215 [4], for at least *n*=16 cells, including the reference cell, within $T_{\text{RSTD InterRAT, E-UTRAN TDD}}$ ms as given below:

$$T_{\text{RSTD InterRAT, E-UTRAN TDD}} = T_{\text{PRS}} \cdot (M - 1) + \Delta \quad ms \quad ,$$

where

$T_{\text{RSTD InterRAT, E-UTRAN TDD}}$ is the total time for detecting and measuring at least *n* cells,

T_{PRS} is the largest value of the cell-specific positioning subframe configuration period, defined in TS 36.211 [23], among the measured *n* cells including the reference cell,

M is the number of PRS positioning occasions as defined in Table 9.4.4.2.2-1, where a PRS positioning occasion is as defined in clause 9.4.4.1.2,

$CSSF_{interRAT}=CSSF_{within_gap,i}$ is the scaling factor determined by the gap sharing scheme for the RSTD measurements on the carrier frequency *i* as defined in clause 9.1.5.2,

$\Delta = 160 \cdot \left\lceil \frac{n}{M} \right\rceil$ ms is the measurement time for a single PRS positioning occasion which includes the sampling time and the processing time, and

the *n* cells are distributed on up to two E-UTRAN TDD carrier frequencies.

Table 9.4.4.2.2-1: Number of PRS positioning occasions within $T_{\text{RSTD InterRAT, E-UTRAN TDD}}$

Positioning subframe T_{PRS} configuration period,	Number of PRS positioning occasions, M	
	f2 Note1	f1 and f2 Note2
160 ms	16 × $CSSF_{interRAT}$	32 × $CSSF_{interRAT}$
>160 ms	8 × $CSSF_{interRAT}$	16 × $CSSF_{interRAT}$
NOTE 1: When inter-RAT E-UTRAN TDD RSTD measurements are performed over the reference cell and neighbour cells, which belong to the E-UTRAN TDD carrier frequency f2.		
NOTE 2: When inter-RAT E-UTRAN TDD RSTD measurements are performed over the reference cell and the neighbour cells, which belong to the E-UTRAN TDD carrier frequency f1 and the E-UTRAN TDD carrier frequency f2 respectively.		

The requirements in this clause shall apply for all TDD special subframe configurations specified in TS 36.211 [23] and for the TDD uplink-downlink configurations as specified in Table 9.4.4.2.2-2 for UE requiring measurement gaps for these measurements. For UEs capable of performing inter-RAT RSTD measurements without measurement gaps, TDD uplink-downlink subframe configurations as specified in Table 9.4.4.2.2-3 shall apply.

Table 9.4.4.2.2-2: TDD uplink-downlink subframe configurations applicable for inter-RAT RSTD requirements

PRS Transmission Bandwidth (RB)	Applicable TDD uplink-downlink configurations
6, 15	3, 4 and 5
25	1, 2, 3, 4, 5 and 6
50, 75, 100	0, 1, 2, 3, 4, 5 and 6
NOTE 1: Uplink-downlink configurations are specified in Table 4.2-2 in TS 36.211 [23].	

Table 9.4.4.2.2-3: TDD uplink-downlink subframe configurations applicable for inter-RAT RSTD requirements without gaps

PRS Transmission Bandwidth (RB)	Applicable TDD uplink-downlink configurations
6, 15	1, 2, 3, 4 and 5
25, 50, 75, 100	0, 1, 2, 3, 4, 5 and 6
NOTE 1: Uplink-downlink configurations are specified in Table 4.2-2 in TS 36.211 [23].	

The UE physical layer shall be capable of reporting RSTD for the reference cell and all the neighbor cells *i* out of at least (*n*-1) neighbor cells within $T_{\text{RSTD InterRAT, E-UTRAN TDD}}$ provided:

$\left(\text{PRS}\,\hat{E}_s / \text{Iot}\right)_{ref}$ ≥-6 dB for all Frequency Bands for the reference cell,

$\left(\text{PRS}\,\hat{E}_s / \text{Iot}\right)_i$ ≥-13 dB for all Frequency Bands for neighbour cell *i*,

$\left(\text{PRS}\,\hat{E}_s / \text{Iot}\right)_{ref}$ and $\left(\text{PRS}\,\hat{E}_s / \text{Iot}\right)_i$ conditions apply for all subframes of at least $L = \frac{M}{2}$ PRS positioning occasions,

PRP $1,2|_{\text{dBm}}$ according to TS 36.133 [15, Annex B.2.6] for a corresponding Band,

$\text{PRS}\,\hat{E}_s / \text{Iot}$ is as defined in clause 9.4.4.1.2.

The time $T_{\text{RSTD InterRAT, E-UTRAN TDD}}$ starts from the first subframe of the PRS positioning occasion closest in time after both the OTDOA-RequestLocationInformation message and the OTDOA assistance data in the OTDOA-ProvideAssistanceData message via LPP as specified in TS 38.305 [22], are delivered to the physical layer of the UE.

The RSTD measurement accuracy for all measured neighbor cells *i* shall be fulfilled according to the accuracy as specified in clause 10.2.4.

9.4.4.2.2.1 RSTD Measurement Reporting Delay

This requirement assumes that that the measurement report is not delayed by other LPP signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: 2 x TTI_{DCCH} where TTI_{DCCH} is the duration of subframe or slot or subslot when the measurement report is transmitted on the PUSCH with subframe or slot or subslot duration. This measurement reporting delay excludes any delay caused by no UL resources for UE to send the measurement report.

9.4.4.2.2.2 Requirements for acquiring the timing of the E-UTRA OTDOA reference cell

When the UE is not aware of the SFN of at least one LTE cell in the OTDOA assistance data, the UE supporting per-FR gaps may make autonomous gaps in downlink reception and uplink transmission of the PCell, PSCell, and each of the SCells in FR1 for acquiring SFN of the reference cell in the E-UTRA OTDOA assistance data, while no autonomous

gaps in downlink reception or uplink transmission are allowed in any of the UE serving cells in FR2. The UE, which are only supporting per-UE gaps, may make autonomous gaps in downlink reception and uplink transmission of the PCell, PSCell, and each of the SCells for acquiring the SFN of the reference cell in the E-UTRA OTDOA assistance data.

When the UE is not aware of and cannot derive the subframe timing difference between the NR serving cell and the OTDOA assistance data reference cell, the UE may need to request measurement gaps while indicating *eutra-FineTimingDetection* according to TS 38.331 [2] for detecting the reference cell in the E-UTRA OTDOA assistance data.

When the UE is performing one or both of SFN acquisition or cell detection as specified above, the UE shall be able to determine the timing of the E-UTRA OTDOA assistance data reference cell during the time period

$$T_{RefCell,E\text{-}UTRAN} = T_{Detect,\ E\text{-}UTRAN\ TDD} + T_{MIB} + T_{ECGI}\ ,$$

where

$T_{Detect,\ E\text{-}UTRAN\ TDD} = T_{Identify,\ E\text{-}UTRAN\ TDD} - T_{measure,\ E\text{-}UTRAN\ TDD}$ is according to clause 9.4.3 assuming $CSSF_{interRAT}=1$ and it is the time needed to detect the E-UTRA OTDOA assistance data reference cell when the UE needs to acquire the subframe and slot timing of the cell, provided the UE is configured with measurement gaps ($T_{Detect,\ E\text{-}UTRAN\ TDD}=0$ when both *nr-LTE-SFN-Offset* and *nr-LTE-fineTiming-Offset* are provided in the E-UTRA OTDOA assistance data or the E-UTRA OTDOA assistance data reference cell is known to the UE), and

T_{MIB} = 50 ms is the time required to acquire SFN and/or PHICH configuration of the E-UTRA OTDOA assistance data reference cell provided the OTDOA assistance data reference cell is decodable and at least all E-UTRA subframes #0 during T_{MIB} are available at the UE receiver ($T_{MIB}=0$ when *nr-LTE-SFN-Offset* is provided in the E-UTRA OTDOA assistance data and ECGI acquisition is not needed), and

T_{ECGI} = 100 ms is the time required to acquire ECGI of the E-UTRA OTDOA assistance data reference cell when *cellGlobalId* is included in *OTDOA-ReferenceCellInfo* and the UE is not aware of the ECGI of this cell (T_{ECGI} = 0 when *cellGlobalId* is not included in *OTDOA-ReferenceCellInfo* or the UE is aware of the ECGI of the E-UTRA OTDOA assistance data reference cell).

When detecting the E-UTRAN OTDOA reference cell, the requirements in this clause shall be met, provided the conditions for the detectable cell are fulfilled according to clause 9.4.3.1. In addition, the MIB of the E-UTRA OTDOA reference cell whose SFN is acquired shall be considered decodable by the UE provided the PBCH demodulation requirements are met according to TS 36.101 [25].

The requirement for acquiring the timing of the E-UTRA OTDOA reference cell within $T_{RefCell,E\text{-}UTRAN}$ is applicable when no DRX is used as well as when any of the DRX cycles specified in TS 38.331 [2] is used.

When $T_{MIB}>0$ and UE is using autonomous gaps during T_{MIB}, the UE shall transmit at least $N_{ACK/NACK,\ MIB,\ TDD}$ ACK/NACKs on PCell, PSCell, and each of activated SCell(s) in the frequency range where the autonomous gaps are created, specified in Table 9.4.4.2.2.2-1. When both $T_{MIB}>0$ and $T_{ECGI}>0$ and UE is using autonomous gaps during $T_{MIB}+T_{ECGI}$, the UE shall transmit on PCell, PSCell, and each of activated SCell(s) in the frequency range where autonomous gaps are created at least $N_{ACK/NACK,\ MIB+ECGI,\ TDD}$ ACK/NACKs specified in Table 9.4.4.2.2.2-3, provided the OTDOA reference cell bandwidth is configured in the OTDOA assistance data [22, 27]. The requirements in Tables 9.4.4.2.2.2-1, 9.4.4.2.2.2-2 and 9.4.4.2.2.2-3 apply, provided that:

- there is continuous DL data allocation,
- no DRX cycle is used,
- no measurement gaps are configured,
- only one code word is transmitted in each slot,
- 2 slot ACK/NACK feedback is configured,
- 20 ms SMTC period is configured,
- SSBs are transmitted in one slot within SMTC window.

Table 9.4.4.2.2.2-1: Minimum number of ACK/NACKs transmitted by the UE during T_{MIB}

$N_{ACK/NACK,\ MIB,\ TDD}$	Configuration of the serving cell in which the transmitted ACK/NACKs are counted

	Duplex mode configuration	SCS
15	FDD	15 kHz
39	FDD	30 kHz
85	FDD	60 kHz
0	TDD Note 1	15 kHz
4	TDD Note 1	30 kHz
12	TDD Note 1	60 kHz
46	TDD Note 2	60 kHz
104	TDD Note 2	120 kHz
NOTE 1: TDD UL-DL configuration is as specified in Table A.3.3.1-1 of TS 38.101-1 [18]. NOTE 2: TDD UL-DL configuration is as specified in Table A.3.3.1-1 of TS 38.101-2 [19].		

Table 9.4.4.2.2.2-2: Void

Table 9.4.4.2.2.2-3: Minimum number of ACK/NACKs transmitted by the UE during $T_{MIB}+T_{ECGI}$

$N_{ACK/NACK, MIB+ECGI, TDD}$	Configuration of the serving cell in which the transmitted ACK/NACKs are counted	
	Duplex mode configuration	SCS
84	FDD	15 kHz
193	FDD	30 kHz
402	FDD	60 kHz
28	TDD Note 1	15 kHz
81	TDD Note 1	30 kHz
159	TDD Note 1	60 kHz
233	TDD Note 2	60 kHz
491	TDD Note 2	120 kHz
NOTE 1: TDD UL-DL configuration is as specified in Table A.3.3.1-1 of TS 38.101-1 [18]. NOTE 2: TDD UL-DL configuration is as specified in Table A.3.3.1-1 of TS 38.101-2 [19].		

9.4.5 Inter-RAT E-CID measurements

9.4.5.1 NR−E-UTRAN FDD E-CID RSRP and RSRQ measurements

9.4.5.1.1 Introduction

The requirements in clause 9.4.5.1. shall apply provided the UE has received *ECID-RequestLocationInformation* message from LMF via LPP requesting the UE to report inter-RAT E-UTRAN FDD E-CID RSRP and RSRQ measurements [22, 27].

9.4.5.1.2 Requirements

The requirements in clause 9.4.2 also apply for this clause except the measurement reporting requirements. The measurement reporting requirements for E-CID RSRP and RSRQ are defined in clause 9.4.5.1.3.

9.4.5.1.3 Measurement Reporting Delay

This requirement assumes that that the measurement report is not delayed by other LPP signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: 2 x TTI_{DCCH} where TTI_{DCCH} is the duration of subframe or slot or subslot when the measurement report is transmitted on the PUSCH with subframe or slot or subslot duration. This measurement reporting delay excludes any delay caused by no UL resources for UE to send the measurement report.

Reported RSRP and RSRQ measurements contained in periodically triggered measurement reports shall meet the requirements in clauses 10.2.2 and 10.2.3, respectively.

9.4.5.2 NR−E-UTRAN TDD E-CID RSRP and RSRQ measurements

9.4.5.2.1 Introduction

The requirements in clause 9.4.5.2. shall apply provided the UE has received *ECID-RequestLocationInformation* message from LMF via LPP requesting the UE to report inter-RAT E-UTRAN TDD E-CID RSRP and RSRQ measurements [22, 27].

9.4.5.2.2 Requirements

The requirements in clause 9.4.3 also apply for this clause except the measurement reporting requirements. The measurement reporting requirements for E-CID RSRP and RSRQ are defined in clause 9.4.5.2.3.

9.4.5.2.3 Measurement Reporting Delay

This requirement assumes that the measurement report is not delayed by other LPP signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: 2 x TTI_{DCCH} where TTI_{DCCH} is the duration of subframe or slot or subslot when the measurement report is transmitted on the PUSCH with subframe or slot or subslot duration. This measurement reporting delay excludes any delay caused by no UL resources for UE to send the measurement report.

Reported RSRP and RSRQ measurements contained in periodically triggered measurement reports shall meet the requirements in clauses 10.2.2 and 10.2.3, respectively.

9.4.6 NR − UTRAN FDD measurements

9.4.6.1 Introduction

The requirements are applicable for NR− UTRAN FDD CPICH RSCP and CPICH Ec/No measurements for SRVCC.

9.4.6.2 Requirements when no DRX is used

9.4.6.2.1 Identification of a new UTRA FDD cell

When explicit neighbour list is provided and no DRX is used, either measurement gaps are scheduled or the UE supports capability of conducting such measurements without gaps, the UE shall be able to identify a new detectable cell belonging to the monitored set within

$$T_{identify,\ UTRA_FDD} = T_{basic_identify_UTRA_FDD} \cdot \frac{480}{T_{inter1}} \cdot CSSF_{interRAT} \quad ms$$

A cell shall be considered detectable when

- CPICH Ec/Io $\geq$ -20 dB,
- SCH_Ec/Io $\geq$ -17 dB for at least one channel tap and SCH_Ec/Ior is equally divided between primary synchronisation code and secondary synchronisation code. When L3 filtering is used an additional delay can be expected.

9.4.6.2.2 UE UTRA FDD CPICH measurement capability

When measurement gaps are scheduled for UTRA FDD inter RAT measurements, or the UE supports capability of conducting such measurements without gaps, the UE physical layer shall be capable of reporting measurements to higher layers with measurement accuracy as specified in Clause 10 with measurement period given by

$$T_{measurement_UTRA_FDD} = Max\left\{T_{Measurement_Period\ UTRA_FDD} \cdot CSSF_{interRAT}, T_{basic_measurement_UTRA_FDD} \cdot \frac{480}{T_{inter1}} \cdot CSSF_{interRAT}\right\} ms$$

The UE shall be capable of performing UTRA FDD CPICH measurements for $X_{basic\ measurementUTRA_FDD}$ inter-frequency cells per FDD frequency and the UE physical layer shall be capable of reporting measurements to higher layers with the measurement period of $T_{Measurement_\ UTRA_FDD}$.

$X_{basic\ measurement\ UTRA_FDD} = 6$

$T_{Measurement_Period\ UTRA_FDD}$ = 480 ms. The period used for calculating the measurement period $T_{measurement_UTRA_FDD}$ for UTRA FDD CPICH measurements.

$T_{basic_identify_UTRA_FDD}$ = 300 ms. This is the time period used in the inter RAT equation in clause 9.4.6.2.1 where the maximum allowed time for the UE to identify a new UTRA FDD cell is defined.

$T_{basic_measurement_UTRA_FDD}$ = 50 ms. This is the time period used in the equation for defining the measurement period for inter RAT CPICH measurements.

$CSSF_{interRAT} = CSSF_{within_gap,i}$ is the scaling factor for the measured inter-RAT UTRA carrier *i* which is calculated as specified in clause 9.1.5.2.

T_{inter1} is defined in clause 9.4.1.

9.4.6.2.3 Periodic Reporting

Reported measurements in periodically triggered measurement reports shall meet the requirements in clause 10.

9.4.6.2.4 Event Triggered Reporting

Reported measurements in event triggered measurement reports shall meet the requirements in clause 10.

The UE shall not send any event triggered measurement reports, as long as the reporting criteria is not fulfilled.

The measurement reporting delay is defined as the time between any event that will trigger a measurement report until the UE starts to transmit the measurement report over the Uu interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is twice the TTI of the uplink DCCH. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{identify,\ UTRA_FDD}$ defined in Clause 9.4.6.2.1 for the minimum requirements. When L3 filtering is used an additional delay can be expected.

If a cell which has been detectable at least for the time period $T_{identify,\ UTRA_FDD}$ defined in clause 9.4.6.2.1 for the minimum requirements and then triggers the measurement report as per TS 38.331 [2], the event triggered measurement reporting delay shall be less than $T_{measurement_UTRA_FDD}$ defined in clause 9.4.6.2.2 provided the timing to that cell has not changed more than ± 32 chips while measurement gap has not been available and the L3 filter has not been used. When L3 filtering is used, an additional delay can be expected.

9.4.6.2.5 Event-triggered Periodic Reporting

Reported measurements contained in event triggered periodic measurement reports shall meet the requirements in clause 10.

The first report in event triggered periodic measurement reporting shall meet the requirements specified in clause 9.4.6.2.4 Event Triggered Reporting.

9.4.6.3 Requirements when DRX is used

When explicit neighbour list is provided and DRX is used, either measurement gaps are scheduled or the UE supports capability of conducting such measurements without gaps, the UE shall be able to identify a new detectable cell belonging to the neighbour cell list within $T_{identify,UTRA_FDD}$ as shown in table 9.4.6.3-1

Table 9.4.6.3-1: Requirement to identify a newly detectable UTRA FDD cell

DRX cycle length (s)	$T_{identify_UTRA_FDD}$ (s) (DRX cycles)	
	Gap period = 40 ms	Gap period = 80 ms
≤0.04	Non DRX Requirements in clause 9.4.6.2 are applicable	Non DRX Requirements in clause 9.4.6.2 are applicable
0.064	2.56 *$CSSF_{interRAT}$ (40*$CSSF_{interRAT}$)	4.8 *$CSSF_{interRAT}$ (75 *$CSSF_{interRAT}$)
0.08	3.2 *$CSSF_{interRAT}$ (40 *$CSSF_{interRAT}$)	4.8 *$CSSF_{interRAT}$ (60* $CSSF_{interRAT}$)
0.128	3.2 *$CSSF_{interRAT}$ (25* $CSSF_{interRAT}$)	4.8 *$CSSF_{interRAT}$ (37.5* $CSSF_{interRAT}$)
0.16	3.2 *$CSSF_{interRAT}$ (20 *$CSSF_{interRAT}$)	4.8 *$CSSF_{interRAT}$ (30 *$CSSF_{interRAT}$)
0.16<DRX-cycle≤2.56	Note1 (20 *$CSSF_{interRAT}$)	Note1 (20 *$CSSF_{interRAT}$)
Note 1: Time depends upon the DRX cycle in use. Note 2: $CSSF_{interRAT}$ is as defined in clause 9.4.2.2.		

A cell shall be considered detectable provided following conditions are fulfilled: A cell shall be considered detectable when

- CPICH Ec/Io $\geq$ -20 dB,
- SCH_Ec/Io $\geq$ -17 dB for at least one channel tap and SCH_Ec/Ior is equally divided between primary synchronisation code and secondary synchronisation code. When L3 filtering is used an additional delay can be expected.

The UE shall be capable of performing RSCP and Ec/Io measurements of at least 6 UTRA cells per UTRA FDD carrier for up to 3 UTRA FDD carriers and the UE physical layer shall be capable of reporting RSCP and Ec/Io measurements to higher layers with the measurement period defined in table 9.4.6.3-2 when DRX is used, either measurement gaps are scheduled or the UE supports capability of conducting such measurements without gaps.

Table 9.4.6.3-2: Requirement to measure UTRA FDD cells

DRX cycle length (s)	$T_{measure_UTRA_FDD}$ (s) (DRX cycles)	
	Gap period = 40 ms	**Gap period = 80 ms**
≤0.04	Non DRX Requirements in clause 9.4.6.2 are applicable	Non DRX Requirements in clause 9.4.6.2 are applicable
0.064	0.48* $CSSF_{interRAT}$ (7.5* N_{freq}*$CSSF_{interRAT}$)	0.8 *$CSSF_{interRAT}$ (12.5 *$CSSF_{interRAT}$)
0.08	0.48 *$CSSF_{interRAT}$ (6 *$CSSF_{interRAT}$)	0. 8*$CSSF_{interRAT}$ (10 *$CSSF_{interRAT}$)
0.128	0.64 *$CSSF_{interRAT}$ (5 *$CSSF_{interRAT}$)	0. 8 *$CSSF_{interRAT}$ (6.25 *$CSSF_{interRAT}$)
0.128<DRX-cycle≤2.56	Note1 (5 *$CSSF_{interRAT}$)	Note1 (5 *$CSSF_{interRAT}$)
Note 1: Time depends upon the DRX cycle in use. Note 2: $CSSF_{interRAT}$ is as defined in clause 9.4.2.2.		

The measurement accuracy for all measured cells shall be as specified in the clause 10.3.

9.4.6.3.1 Periodic Reporting

Reported measurements in periodically triggered measurement reports shall meet the requirements in clause 10.

9.4.6.3.2 Event Triggered Reporting

Reported measurements in event triggered measurement reports shall meet the requirements in clause 10.

The UE shall not send any event triggered measurement reports, as long as the reporting criteria is not fulfilled.

The measurement reporting delay is defined as the time between any event that will trigger a measurement report until the UE starts to transmit the measurement report over the Uu interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is twice the TTI of the uplink DCCH. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{identify,UTRA_FDD}$ defined in Clause 9.4.6.3. When L3 filtering is used an additional delay can be expected.

If a cell which has been detectable at least for the time period $T_{identify,\ UTRA_FDD}$ defined in clause 9.4.6.3 and then triggers the measurement report as per TS 38.331 [2], the event triggered measurement reporting delay shall be less than $T_{measurement_UTRA_FDD}$ defined in clause 9.4.6.3 provided the timing to that cell has not changed more than ± 32 chips while measurement gap has not been available and the L3 filter has not been used. When L3 filtering is used, an additional delay can be expected.

9.4.6.3.3 Event-triggered Periodic Reporting

Reported measurements contained in event triggered periodic measurement reports shall meet the requirements in clause 10.

The first report in event triggered periodic measurement reporting shall meet the requirements specified in clause 9.4.6.3.2 Event Triggered Reporting.

9.4.7 NR – E-UTRAN measurements with autonomous gaps

9.4.7.1 CGI identification of an E-UTRA cell with autonomous gaps

The requirements in this clause apply when the UE is configured with standalone NR, NE-DC or NR-DC. The UE shall identify and report the CGI when requested by an NR PCell for the purpose ‘reportCGI’. The UE may make autonomous gaps in downlink reception and uplink transmission for receiving MIB and SIB1 message according to clause 5.5.3.1 in TS 38.331 [2]. If autonomous gaps are used for measurement with the purpose of ‘reportCGI’, regardless of whether DRX is used or not, or regardless of whether SCell(s) are configured or not, the UE shall be able to identify a new CGI of E-UTRA cell within $T_{identify_CGI,\ E\text{-}UTAN}$= 150 ms. This is the maximum allowed time for the UE to identify a new CGI of an E-UTRA cell, provided that the E-UTRA cell has been already identified by the UE.

A cell shall be considered identifiable following conditions are fulfilled:

- RSRP related side conditions given in Clause 9.1 in [15] are fulfilled for a corresponding Band,
- SCH_RP and SCH Ês/Iot according to Annex B.2.2 in [15] for a corresponding Band

The MIB of an E-UTRA cell whose CGI is identified shall be considered decodable by the UE provided the PBCH demodulation requirements are met according to [25].

The requirement for identifying a new CGI of an E-UTRA cell within $T_{identify_CGI,\ E\text{-}UTRAN}$ is applicable when no DRX is used as well as when any of the DRX cycles specified in TS 38.331 [2] is used.9.4.7.2 CGI reporting delay

The E-UTRA CGI reporting delay is defined as the time between a command that will trigger an E-UTRA CGI report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty of 2 x TTI_{DCCH} resulting when inserting the measurement report to the TTI of the uplink DCCH. This measurement reporting delay excludes any delay caused by lack of UL resources for UE to send the measurement report.

The CGI reporting delay shall be less than $T_{identify_CGI,\ E\text{-}UTAN}$ plus RRC procedure delay defined in clause 12 in TS 38.331 [2], and an additional 30ms margin.

9.4A Inter-RAT measurements for RedCap

9.4A.1 Introduction

The requirements in this clause are specified for NR−E-UTRAN FDD and NR−E-UTRAN TDD measurements and are applicable without an explicit E-UTRAN neighbour cell list containing physical layer cell identities, for a UE:

- in RRC_CONNECTED state, and
- configured
  - with SA operation mode by PCell with NR−E-UTRAN FDD or TDD measurement (RSRP, RSRQ, RS-SINR) on E-UTRA non-serving frequency carrier, and
- configured with an appropriate measurement gap pattern according to Table 9.1A.2-3.

Parameter T_{Inter1_RedCap} used in inter-RAT requirements in clause 9.4A is specified in Table 9.4A.1-1.

Table 9.4A.1-1: Minimum available time for inter-RAT measurements

Gap Pattern Id	MeasurementGap Length (MGL, ms)	Measurement Gap Repetition Period (MGRP, ms)	Minimum available time for inter-frequency and inter-RAT measurements during 480 ms period (Tinter1_RedCap, ms)
0	6	40	60
1	6	80	30
2	3	40	24 Note 1
3	3	80	12 Note 1
4	6	20	120 Note 1
6	4	20	72 Note 1,3,6
7	4	40	36 Note 1,4,6
8	4	80	18 Note 1,5,6
10	3	20	48 Note 1

NOTE 1: When determining UE requirements using Tinter1_RedCap for gap pattern IDs 2, 3, 4, 6, 7, 8, 10, Tinter1_RedCap = 60 for gap pattern IDs 2, 4, 6, 7, 10, and Tinter1_RedCap = 30 for gap pattern IDs 3 and 8 shall be used.
NOTE 2: Measurement gaps pattern configurations applicability is as specified in Table [9.1A.2-1].
NOTE 3: When this gap pattern is used, the T_{inter_RedCap} for E-UTRA inter-frequency measurements is 48 ms corresponding to the first 3 ms of the 4 ms gap.
NOTE 4: When this gap pattern is used, the T_{inter_RedCap} for E-UTRA inter-frequency measurements is 24 ms corresponding to the first 3 ms of the 4 ms gap.
NOTE 5: When this gap pattern is used, the T_{inter_RedCap} for E-UTRA inter-frequency measurements is 12 ms corresponding to the first 3 ms of the 4 ms gap.
NOTE 6: This gap pattern is applicable for E-UTRA inter-frequency measurements only if gap based NR measurements are also configured.

A UE configured with gap pattern ID 2, 3 or 10 shall be able to detect a target cell, provided that

- the E-UTRA subframe #0 or #5 of the target E-UTRAN cell begins not earlier than 500 μs from the start of the measurement gap, and
- the E-UTRA subframe #0 or #5 of the target E-UTRAN cell ends not later than 500 μs before the end of the measurement gap in case of FDD and not later than 750 μs before the end of measurement gap in case of TDD.

A UE configured with gap pattern ID 6, 7 or 8 shall be able to detect a target cell, provided that

- the E-UTRA subframe #0 or #5 of the target E-UTRAN cell begins not earlier than 500 μs from the start of the measurement gap, and

- the E-UTRA subframe #0 or #5 of the target E-UTRAN cell ends no later than 1500 μs before the end of the measurement gap in case of FDD and no later than 1750 μs before the end of measurement gap in case of TDD.

In this clause, the SSB terminology applies for both CD-SSB and NCD-SSB.

9.4A.2 NR − E-UTRAN FDD measurements

9.4A.2.1 Introduction

The requirements are applicable for NR−E-UTRAN FDD RSRP, RSRQ, and RS-SINR measurements.

In the requirements, an E-UTRAN FDD cell is considered to be detectable when:

Editor's note: New reference clauses shall be specified for 1Rx.

- For 2 Rx RedCap UE:
  - RSRP related conditions in the accuracy requirements in clause 10.2.2 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.3 of TS 36.133 [15],
  - RSRQ related conditions in the accuracy requirements in clause 10.2.3 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.3 of TS 36.133 [15],
  - RS-SINR related conditions in the accuracy requirements in clause 10.2.5 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.19 of TS 36.133 [15].
- For 1 Rx RedCap UE:
  - RSRP related conditions in the accuracy requirements in clause [x.y.z] are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex [B.2.3] and Annex [B.3.3] of TS 36.133 [15],
  - RSRQ related conditions in the accuracy requirements in clause [x.y.z] are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex [B.2.3] and Annex [B.3.3] of TS 36.133 [15],

9.4A.2.2 Requirements when no DRX is used

When the UE requires measurement gaps to identify and measure inter-RAT cells and an appropriate measurement gap pattern is scheduled, the UE shall be able to identify a new detectable FDD cell within $T_{\text{Identify_RedCap, E-UTRAN FDD}}$ according to the following expression:

$$T_{\text{Identify_RedCap,E-UTRAN FDD}} = T_{\text{BasicIdentify}} \cdot \frac{480}{T_{\text{Inter1_RedCap}}} \cdot \text{CSSF}_{\text{interRAT_RedCap}} \quad ms,$$

where:

$T_{\text{BasicIdentify}}$ = 480 ms,

$T_{\text{Inter1_RedCap}}$ is defined in clause 9.4A.1,

$\text{CSSF}_{\text{interRAT_RedCap}} = \text{CSSF}_{\text{within_gap_RedCap,i}}$ is the scaling factor for the measured inter-RAT E-UTRA carrier *i* which is calculated as specified in clause 9.1A.5.2.

Identification of a cell shall include detection of the cell and additionally performing a single measurement with measurement period of $T_{\text{Measure_RedCap, E-UTRAN FDD}}$ defined in Table 9.4A.2.2-1 and Table 9.4A.2.2-2 for 2 Rx RedCap UE and 1 Rx RedCap UE, respectively.

Table 9.4A.2.2-1: Measurement period and measurement bandwidth for 2Rx RedCap UE

Configuration	Physical Layer Measurement period: $T_{\text{Measure_RedCap, E-UTRAN FDD}}$ [ms]	Measurement bandwidth [RB]
0	480 x $\text{CSSF}_{\text{interRAT_RedCap}}$	6

1 (Note 1)	240 x $CSSF_{interRAT_RedCap}$	50
NOTE 1: This configuration is optional.		

Table 9.4A.2.2-2: Measurement period and measurement bandwidth for 1Rx RedCap UE

Configuration	Physical Layer Measurement period: $T_{Measure_RedCap,\ E\text{-}UTRAN\ FDD}$ [ms]	Measurement bandwidth [RB]
0	960 x $CSSF_{interRAT_RedCap}$	6
1 (Note 1)	480 x $CSSF_{interRAT_RedCap}$	50
NOTE 1: This configuration is optional.		

The UE shall be capable of identifying and performing NR – E-UTRAN FDD RSRP, RSRQ, and RS-SINR measurements of at least 4 identified E-UTRAN FDD cells per E-UTRA FDD carrier frequency layer during each layer 1 measurement period, for up to 7 E-UTRA FDD carrier frequency layers.

If higher layer filtering is used, an additional cell identification delay can be expected.

For 2 Rx RedCap UE:

The NR – E-UTRAN FDD RSRP measurement accuracy for all measured cells shall be as specified in clause 10.2.2. The NR – E-UTRAN FDD RSRQ measurement accuracy for all measured cells shall be as specified in clause 10.2.3. The NR – E-UTRAN FDD RS-SINR measurement accuracy for all measured cells shall be as specified in clause 10.2.5.

For 1 Rx RedCap UE:

The NR – E-UTRAN FDD RSRP measurement accuracy for all measured cells shall be as specified in clause [x.y.z]. The NR – E-UTRAN FDD RSRQ measurement accuracy for all measured cells shall be as specified in clause [x.y.z]. The NR – E-UTRAN FDD RS-SINR measurement accuracy for all measured cells shall be as specified in clause [x.y.z].

9.4A.2.3 Requirements when DRX is used

When DRX is in use and measurement gaps are configured, the UE shall be able to identify a new detectable E-UTRAN FDD cell within $T_{Identify_RedCap,\ E\text{-}UTRAN\ FDD}$ specified in Table 9.4A.2.3-1.

Table 9.4A.2.3-1: Requirement to identify a newly detectable E-UTRAN FDD cell

DRX cycle length (s)	$T_{Identify_RedCap,\ E\text{-}UTRAN\ FDD}$ (s) (DRX cycles)	
	Gap period = 40 ms, 20 ms	Gap period = 80 ms
≤0.16	Non-DRX requirements in clause 9.4A.2.2 apply	Non-DRX requirements in clause 9.4A.2.2 apply
0.256	5.12* $CSSF_{interRAT_RedCap}$ (20*$CSSF_{interRAT_RedCap}$)	7.68* $CSSF_{interRAT_RedCap}$ (30*$CSSF_{interRAT_RedCap}$)
0.32	6.4* $CSSF_{interRAT_RedCap}$ (20*$CSSF_{interRAT_RedCap}$)	7.68* $CSSF_{interRAT_RedCap}$ (24*$CSSF_{interRAT_RedCap}$)
0.32< DRX-cycle ≤10.24	Note1 (20*$CSSF_{interRAT_RedCap}$)	Note1 (20*$CSSF_{interRAT_RedCap}$)
NOTE 1: The time depends on the DRX cycle length. NOTE 2: $CSSF_{interRAT_RedCap}$ is as defined in clause 9.4A.2.2.		

When DRX is in use, the UE shall be capable of performing NR – E-UTRAN FDD RSRP, RSRQ, and RS-SINR measurements of at least 4 identified E-UTRAN FDD cells per E-UTRA FDD frequency layer during each layer 1 measurement period, for up to 7 E-UTRA FDD carrier frequency layers, and the UE physical layer shall be capable of reporting NR – E-UTRAN FDD RSRP, RSRQ, and RS-SINR measurements to higher layers with the measurement period $T_{measure_RedCap,\ E\text{-}UTRAN\ FDD}$ specified in Table 9.4A.2.3-2 and Table 9.4A.2.3-3.

Table 9.4A.2.3-2: Requirement to measure E-UTRAN FDD cells for 2Rx RedCap UE

DRX cycle length (s)	$T_{measure_RedCap,\ E\text{-}UTRAN\ FDD}$ (s) (DRX cycles)
≤0.08	Non-DRX requirements in clause 9.4A.2.2 apply

0.08< DRX-cycle ≤10.24	Note1 (5* $CSSF_{interRAT_RedCap}$)
NOTE 1: The time depends on the DRX cycle length. NOTE 2: $CSSF_{interRAT_RedCap}$ is as defined in clause 9.4A.2.2.	

Table 9.4A.2.3-3: Requirement to measure E-UTRAN FDD cells for 1Rx RedCap UE

DRX cycle length (s)	$T_{measure_RedCap,\ E\text{-}UTRAN\ FDD}$ (s) (DRX cycles)
≤0.08	Non-DRX requirements in clause 9.4A.2.2 apply
0.08< DRX-cycle ≤10.24	Note1 (10* $CSSF_{interRAT_RedCap}$)
NOTE 1: The time depends on the DRX cycle length. NOTE 2: $CSSF_{interRAT_RedCap}$ is as defined in clause 9.4A.2.2.	

If higher layer filtering is used, an additional cell identification delay can be expected.

For 2 Rx RedCap UE:

The NR – E-UTRAN FDD RSRP measurement accuracy for all measured cells shall be as specified in clause 10.2.2. The NR – E-UTRAN FDD RSRQ measurement accuracy for all measured cells shall be as specified in clause 10.2.3. The NR – E-UTRAN FDD RS-SINR measurement accuracy for all measured cells shall be as specified in clause 10.2.5.

For 1 Rx RedCap UE:

The NR – E-UTRAN FDD RSRP measurement accuracy for all measured cells shall be as specified in clause [x.y.z]. The NR – E-UTRAN FDD RSRQ measurement accuracy for all measured cells shall be as specified in clause [x.y.z]. The NR – E-UTRAN FDD RS-SINR measurement accuracy for all measured cells shall be as specified in clause [x.y.z].

9.4A.2.4 Measurement reporting requirements

9.4A.2.4.1 Periodic Reporting

For 2 Rx RedCap UE: The requirements in clause 9.4.2.4.1 shall apply.

For 1 Rx RedCap UE: The reported NR – E-UTRAN FDD RSRP, RSRQ, and RS-SINR measurements contained in periodically triggered measurement reports shall meet the requirements in clauses [x.y.z], [x.y.z], and [x.y.z], respectively.

9.4A.2.4.2 Event-Triggered Periodic Reporting

For 2 Rx RedCap UE: The reported NR – E-UTRAN FDD RSRP, RSRQ, and RS-SINR measurements contained in event-triggered periodic measurement reports shall meet the requirements in clauses 10.2.2, 10.2.3, and 10.2.5, respectively.

For 1 Rx RedCap UE: The reported NR – E-UTRAN FDD RSRP, RSRQ, and RS-SINR measurements contained in event-triggered periodic measurement reports shall meet the requirements in clauses [x.y.z], [x.y.z], and [x.y.z], respectively.

The first report in event-triggered periodic measurement reporting shall meet the requirements specified in clause 9.4A.2.4.3.

9.4A.2.4.3 Event-Triggered Reporting

For 2 Rx RedCap UE: The reported NR – E-UTRAN FDD RSRP, RSRQ, and RS-SINR measurements contained in event-triggered measurement reports shall meet the requirements in clauses 10.2.2, 10.2.3, and 10.2.5, respectively.

For 1 Rx RedCap UE: The reported NR – E-UTRAN FDD RSRP, RSRQ, and RS-SINR measurements contained in event-triggered measurement reports shall meet the requirements in clauses [x.y.z], [x.y.z], and [x.y.z], respectively.

The UE shall not send any event-triggered measurement reports as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: 2 x TTI_{DCCH} where TTI_{DCCH} is the duration of subframe or slot or subslot when the measurement report is transmitted on the PUSCH with subframe or slot or subslot duration. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{Identify_RedCap,\ E\text{-}UTRAN\ FDD}$ defined in clauses 9.4A.2.2 and 9.4A.2.3 without DRX and with DRX, respectively. When L3 filtering is used, an additional delay can be expected.

If a cell which has been detectable at least for the time period $T_{Identify_RedCap,\ E\text{-}UTRAN\ FDD}$ becomes undetectable for a period ≤ 5 seconds and then the cell becomes detectable again and triggers an event as per TS 38.331 [2], the event triggered measurement reporting delay shall be less than $T_{Measure_RedCap,\ E\text{-}UTRAN\ FDD}$ provided the timing to that cell has not changed more than ± 50 Ts while measurement gap has not been available and the L3 filter has not been used.

9.4A.3 NR − E-UTRAN TDD measurements

9.4A.3.1 Introduction

The requirements are applicable for NR−E-UTRAN TDD RSRP, RSRQ, and RS-SINR measurements.

In the requirements, an E-UTRAN TDD cell is considered to be detectable when:

Editor's note: New reference clauses shall be specified for 1Rx.

- For 2 Rx RedCap UE:
  - RSRP related conditions in the accuracy requirements in clause 10.2.2 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.3 of TS 36.133 [15],
  - RSRQ related conditions in the accuracy requirements in clause 10.2.3 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.3 of TS 36.133 [15],

    RS-SINR related conditions in the accuracy requirements in clause 10.2.5 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.19 of TS 36.133 [15].
- For 1 Rx RedCap UE:
  - RSRP related conditions in the accuracy requirements in clause [x.y.z] are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.3 of TS 36.133 [15],
  - RSRQ related conditions in the accuracy requirements in clause [x.y.z] are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.3 of TS 36.133 [15],

    RS-SINR related conditions in the accuracy requirements in clause [x.y.z] are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.19 of TS 36.133 [15].

9.4A.3.2 Requirements when no DRX is used

When the UE requires measurement gaps to identify and measure inter-RAT cells and an appropriate measurement gap pattern is scheduled, the UE shall be able to identify a new detectable TDD cell within $T_{Identify_RedCap,\ E\text{-}UTRAN\ TDD}$ according to the following expression:

- When configuration 0 or configuration 1 in Table 9.4A.3.2-1 is applied,

$$T_{\text{Identify_RedCap,E-UTRAN TDD}} = T_{\text{BasicIdentify}} \cdot \frac{480}{T_{\text{Inter1_RedCap}}} \cdot \text{CSSF}_{\text{interRAT_RedCap}} \quad ms,$$

- When configuration 2 or configuration 3 in Table 9.4A.3.2-1 is applied,

$$T_{\text{Identify_RedCap,E-UTRAN TDD}} = T_{\text{BasicIdentify}} \cdot \frac{480}{T_{\text{Inter1_RedCap}}} \cdot \text{CSSF}_{\text{interRAT_RedCap}} + 240 \cdot \text{CSSF}_{\text{interRAT_RedCap}} \quad ms,$$

where:

$T_{BasicIdentify}$ = 480 ms,

T_{Inter1_RedCap} is defined in clause 9.4A.1,

$CSSF_{interRAT_RedCap} = CSSF_{within_gap_RedCap,i}$ is the scaling factor for the measured inter-RAT E-UTRA carrier *i* which is calculated as specified in clause 9.1A.5.2.

Identification of a cell shall include detection of the cell and additionally performing a single measurement with measurement period of $T_{Measure_RedCap,\ E\text{-}UTRAN\ TDD}$ defined in Table 9.4A.3.2-1 and Table 9.4A.3.2-1 for 2 Rx RedCap UE and 1 Rx RedCap UE, respectively.

Table 9.4A.3.2-1: $T_{Measure_RedCap,\ E\text{-}UTRAN\ TDD}$ for different configurations for 2Rx RedCap UE

Configuration	Measurement bandwidth (RB)	Number of UL/DL sub-frames per half frame (5 ms)		DwPTS		$T_{Measure_RedCap,\ E\text{-}UTRAN\ TDD}$ (ms)
		DL	UL	Normal CP	Extended CP	
0	6	2	2	$19760 \cdot T_s$	$20480 \cdot T_s$	480 x $CSSF_{interRAT_RedCap}$
1 (Note 1)	50	2	2	$19760 \cdot T_s$	$20480 \cdot T_s$	240 x $CSSF_{interRAT_RedCap}$
2	6	1	3	$19760 \cdot T_s$	$20480 \cdot T_s$	720 x $CSSF_{interRAT_RedCap}$
3 (Note 1)	50	1	3	$19760 \cdot T_s$	$20480 \cdot T_s$	480 x $CSSF_{interRAT_RedCap}$
NOTE 1: This configuration is optional.						

Table 9.4A.3.2-2: $T_{Measure_RedCap,\ E\text{-}UTRAN\ TDD}$ for different configurations for 1Rx RedCap UE

Configuration	Measurement bandwidth (RB)	Number of UL/DL sub-frames per half frame (5 ms)		DwPTS		$T_{Measure_RedCap,\ E\text{-}UTRAN\ TDD}$ (ms)
		DL	UL	Normal CP	Extended CP	
0	6	2	2	$19760 \cdot T_s$	$20480 \cdot T_s$	960 x $CSSF_{interRAT_RedCap}$
1 (Note 1)	50	2	2	$19760 \cdot T_s$	$20480 \cdot T_s$	480 x $CSSF_{interRAT_RedCap}$
2	6	1	3	$19760 \cdot T_s$	$20480 \cdot T_s$	1440 x $CSSF_{interRAT_RedCap}$
3 (Note 1)	50	1	3	$19760 \cdot T_s$	$20480 \cdot T_s$	960 x $CSSF_{interRAT_RedCap}$
NOTE 1: This configuration is optional.						

The UE shall be capable of identifying and performing NR – E-UTRAN TDD RSRP, RSRQ, and RS-SINR measurements of at least 4 identified E-UTRAN TDD cells per E-UTRA TDD carrier frequency layer during each layer 1 measurement period, for up to 7 E-UTRA TDD carrier frequency layers.

If higher layer filtering is used, an additional cell identification delay can be expected.

For 2 Rx RedCap UE:

The NR – E-UTRAN TDD RSRP measurement accuracy for all measured cells shall be as specified in clause 10.2.2. The NR – E-UTRAN TDD RSRQ measurement accuracy for all measured cells shall be as specified in clause 10.2.3. The NR – E-UTRAN TDD RS-SINR measurement accuracy for all measured cells shall be as specified in clause 10.2.5.

For 1 Rx RedCap UE:

The NR – E-UTRAN TDD RSRP measurement accuracy for all measured cells shall be as specified in clause [x.y.z]. The NR – E-UTRAN TDD RSRQ measurement accuracy for all measured cells shall be as specified in clause [x.y.z]. The NR – E-UTRAN TDD RS-SINR measurement accuracy for all measured cells shall be as specified in clause [x.y.z].

9.4A.3.3 Requirements when DRX is used

When DRX is in use and measurement gaps are configured, the UE shall be able to identify a new detectable E-UTRAN TDD cell within $T_{Identify_RedCap,\ E\text{-}UTRAN\ TDD}$ specified in Table 9.4A.3.3-1.

Table 9.4A.3.3-1: Requirement to identify a newly detectable E-UTRAN TDD cell

DRX cycle length (s)	$T_{Identify_RedCap,\ E\text{-}UTRAN\ TDD}$ (s) (DRX cycles)	
	Gap period = 40 ms, 20 ms	Gap period = 80 ms
≤0.16	Non-DRX requirements in clause [9.4A.3.2] apply	Non-DRX requirements in clause [9.4A.3.2] apply
0.256	5.12* $CSSF_{interRAT_RedCap}$ (20*$CSSF_{interRAT_RedCap}$)	7.68* $CSSF_{interRAT_RedCap}$ (30*$CSSF_{interRAT_RedCap}$)
0.32	6.4* $CSSF_{interRAT_RedCap}$ (20*$CSSF_{interRAT_RedCap}$)	7.68* $CSSF_{interRAT_RedCap}$ (24*$CSSF_{interRAT_RedCap}$)
0.32< DRX-cycle ≤10.24	Note1 (20*$CSSF_{interRAT_RedCap}$)	Note1 (20*$CSSF_{interRAT_RedCap}$)
NOTE 1: The time depends on the DRX cycle length. NOTE 2: $CSSF_{interRAT_RedCap}$ is as defined in clause [9.4A.3.2].		

For 1Rx RedCap UE, a cell shall be considered detectable provided following conditions are fulfilled:

- $RSRP|_{dBm}$ and RSRP Ês/Iot according to Annex B.2.3 in [15] for a corresponding Band,
- other RSRP related side conditions given in Clause 9.1.3.3 and 9.1.3.4 in [15] are fulfilled for a corresponding Band,
- RSRQ related side conditions given in Sections 9.1.6.5 and 9.1.6.6 in [15] are fulfilled for a corresponding Band,
- $SCH_RP|_{dBm}$ SCH Ês/Iot according to Annex B.2.3 in [15] for a corresponding Band.

When DRX is in use, the UE shall be capable of performing NR – E-UTRAN TDD RSRP, RSRQ, and RS-SINR measurements of at least 4 identified E-UTRAN TDD cells per E-UTRA TDD frequency layer during each layer 1 measurement period, for up to 7 E-UTRA TDD carrier frequency layers, and the UE physical layer shall be capable of reporting NR – E-UTRAN TDD RSRP, RSRQ, and RS-SINR measurements to higher layers with the measurement period $T_{measure_RedCap,\ E\text{-}UTRAN\ TDD}$ specified in Table 9.4A.3.3-2 and Table 9.4A.3.3-3 for 2 Rx RedCap UE and 1 Rx RedCap UE, respectively.

Table 9.4A.3.3-2: Requirement to measure E-UTRAN TDD cells for 2Rx RedCap UE

DRX cycle length (s)	$T_{measure_RedCap,\ E\text{-}UTRAN\ TDD}$ (s) (DRX cycles)
≤0.08	Non-DRX Requirements in clause [9.4A.3.2] apply
0.128	For configuration 2 [Note3], non-DRX requirements in clause [9.4A.3.2] apply, Otherwise: Note1 (5*$CSSF_{interRAT_RedCap}$)
0.128<DRX-cycle≤10.24	Note1 (5*$CSSF_{interRAT_RedCap}$)
NOTE 1: The time depends on the DRX cycle length. NOTE 2: $CSSF_{interRAT_RedCap}$ is as defined in clause 9.4A.3.2. NOTE 3: See Table [9.4A.3.2-1].	

Table 9.4A.3.3-3: Requirement to measure E-UTRAN TDD cells for 1Rx RedCap UE

DRX cycle length (s)	$T_{measure_RedCap,\ E\text{-}UTRAN\ TDD}$ (s) (DRX cycles)
≤0.08	Non-DRX Requirements in clause [9.4A.3.2] apply
0.128	For configuration 2 Note3, non-DRX requirements in clause [9.4A.3.2] apply, Otherwise: Note1 ($5*CSSF_{interRAT_RedCap}$)
0.128<DRX-cycle≤10.24	Note1 ($10*CSSF_{interRAT_RedCap}$)
NOTE 1: The time depends on the DRX cycle length. NOTE 2: $CSSF_{interRAT_RedCap}$ is as defined in clause 9.4A.3.2. NOTE 3: See Table [9.4A.3.2-1].	

If higher layer filtering is used, an additional cell identification delay can be expected.

For 2 Rx RedCap UE:

The NR – E-UTRAN TDD RSRP measurement accuracy for all measured cells shall be as specified in clause 10.2.2. The NR – E-UTRAN TDD RSRQ measurement accuracy for all measured cells shall be as specified in clause 10.2.3. The NR – E-UTRAN TDD RS-SINR measurement accuracy for all measured cells shall be as specified in clause 10.2.5.

For 1 Rx RedCap UE:

The NR – E-UTRAN TDD RSRP measurement accuracy for all measured cells shall be as specified in clause [x.y.z]. The NR – E-UTRAN TDD RSRQ measurement accuracy for all measured cells shall be as specified in clause [x.y.z]. The NR – E-UTRAN TDD RS-SINR measurement accuracy for all measured cells shall be as specified in clause [x.y.z].

9.4A.3.4 Measurement reporting requirements

9.4A.3.4.1 Periodic Reporting

For 2 Rx RedCap UE: The requirements in clause 9.4.3.4.1 shall apply.

For 1 Rx RedCap UE: The reported NR – E-UTRAN TDD RSRP, RSRQ, and RS-SINR measurements contained in periodically triggered measurement reports shall meet the requirements in clauses [x.y.z], [x.y.z], and [x.y.z], respectively.

9.4A.3.4.2 Event-Triggered Periodic Reporting

For 2 Rx RedCap UE: The reported NR – E-UTRAN TDD RSRP, RSRQ, and RS-SINR measurements contained in event-triggered periodic measurement reports shall meet the requirements in clauses 10.2.2, 10.2.3, and 10.2.5, respectively.

For 1 Rx RedCap UE: The reported NR – E-UTRAN TDD RSRP, RSRQ, and RS-SINR measurements contained in event-triggered periodic measurement reports shall meet the requirements in clauses [x.y.z], [x.y.z], and [x.y.z], respectively.

The first report in event-triggered periodic measurement reporting shall meet the requirements specified in clause 9.4A.3.4.3.

9.4A.3.4.3 Event-Triggered Reporting

For 2 Rx RedCap UE: The reported NR – E-UTRAN TDD RSRP, RSRQ, and RS-SINR measurements contained in event-triggered measurement reports shall meet the requirements in clauses 10.2.2, 10.2.3, and 10.2.5, respectively.

For 1 Rx RedCap UE: The reported NR – E-UTRAN TDD RSRP, RSRQ, and RS-SINR measurements contained in event-triggered measurement reports shall meet the requirements in clauses [x.y.z], [x.y.z], and [x.y.z], respectively.

The UE shall not send any event-triggered measurement reports as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: 2 x TTI_{DCCH} where TTI_{DCCH} is the duration of subframe or slot or subslot when the measurement report is transmitted on the PUSCH with subframe or slot or subslot duration. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{Identify_RedCap,\ E\text{-}UTRAN\ TDD}$ defined in clauses 9.4A.3.2 and 9.4A.3.3 without DRX and with DRX, respectively. When L3 filtering is used, an additional delay can be expected.

If a cell which has been detectable at least for the time period $T_{Identify_RedCap,\ E\text{-}UTRAN\ TDD}$ becomes undetectable for a period ≤ 5 seconds and then the cell becomes detectable again and triggers an event as per TS 38.331 [2], the event triggered measurement reporting delay shall be less than $T_{Measure_RedCap,\ E\text{-}UTRAN\ TDD}$ provided the timing to that cell has not changed more than ± 50 Ts while measurement gap has not been available and the L3 filter has not been used.

9.4A.4 NR – E-UTRAN measurements with autonomous gaps

9.4A.4.1 CGI identification of an E-UTRA cell with autonomous gaps

The requirements in this clause apply when the UE is configured with standalone NR with 2Rx UE. The UE shall identify and report the CGI when requested by an NR PCell for the purpose 'reportCGI'. The UE may make autonomous gaps in downlink reception and uplink transmission for receiving MIB and SIB1 message according to clause 5.5.3.1 in TS 38.331 [2].

For 2Rx RedCap UE: If autonomous gaps are used for measurement with the purpose of 'reportCGI', the UE shall be able to identify a new CGI of E-UTRA cell within $T_{identify_CGI_RedCap,\ E\text{-}UTAN}$ = 150 ms.

For 1Rx RedCap UE: If autonomous gaps are used for measurement with the purpose of 'reportCGI', the UE shall be able to identify a new CGI of E-UTRA cell within $T_{identify_CGI_RedCap,\ E\text{-}UTAN}$ = 190 ms.

This is the maximum allowed time for the UE to identify a new CGI of an E-UTRA cell, provided that the E-UTRA cell has been already identified by the UE.

A cell shall be considered identifiable following conditions are fulfilled:

- RSRP related side conditions given in Clause 9.1 in [15] are fulfilled for a corresponding Band,
- SCH_RP and SCH Ês/Iot according to Annex B.2.2 in [15] for a corresponding Band

The MIB of an E-UTRA cell whose CGI is identified shall be considered decodable by the UE provided the PBCH demodulation requirements are met according to [25].

The requirement for identifying a new CGI of an E-UTRA cell within $T_{identify_CGI_RedCap,\ E\text{-}UTRAN}$ is applicable when no DRX is used as well as when any of the DRX cycles specified in TS 38.331 [2] is used.

9.4A.4.2 CGI reporting delay

The E-UTRA CGI reporting delay is defined as the time between a command that will trigger an E-UTRA CGI report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty of 2 x TTI_{DCCH} resulting when inserting the measurement report to the TTI of the uplink DCCH. This measurement reporting delay excludes any delay caused by lack of UL resources for UE to send the measurement report.

The CGI reporting delay shall be less than $T_{identify_CGI_RedCap,\ E\text{-}UTAN}$ plus RRC procedure delay defined in clause 12 in TS 38.331 [2], and an additional 30ms margin.

9.4A.4.3 CGI reporting scheduling restriction

When a UE is identifying CGI of an E-UTRA FDD cell or E-UTRA TDD cell with autonomous gaps, within time period $T_{identify_CGI_RedCap,\ E\text{-}UTRA}$ specified in clause 9.4A.4.1, the UE shall be able to transmit at least the number of ACK/NACKs specified in Table 9.4A.4.3-1 on PCell in the frequency range where autonomous gaps are used, provided that:

- there is continuous DL data allocation,
- no DRX cycle is used,
- no measurement gaps are configured,
- only one code word is transmitted in each slot,
- 2 slot ACK/NACK feedback is configured,
- 20 ms SMTC period is configured.

Table 9.4A.4.3-1: Minimum number of ACK/NACKs transmitted by the UE during $T_{identify_CGI_RedCap,\ E\text{-}UTRA}$

Minimum number of transmitted ACK/NACKs	SCS	
	Duplex mode configuration	SCS
	Duplex mode configuration	SCS
84	FDD	15 kHz
193	FDD	30 kHz
402	FDD	60 kHz
28	TDD Note 1	15 kHz
81	TDD Note 1	30 kHz
159	TDD Note 1	60 kHz
233	TDD Note 2	60 kHz
491	TDD Note 2	120 kHz
NOTE 1: TDD UL-DL configuration is as specified in Table A.3.3.1-1 of TS 38.101-1 [18]. NOTE 2: TDD UL-DL configuration is as specified in Table A.3.3.1-1 of TS 38.101-2 [19].		

9.5 L1-RSRP measurements for Reporting

9.5.1 Introduction

When configured by the network, the UE shall be able to perform L1-RSRP measurements of configured CSI-RS, SSB or CSI-RS and SSB resources for L1-RSRP. The measurements shall be performed for a serving cell, including PCell, PSCell, or SCell, on the resources configured for L1-RSRP measurements within the active BWP.

The UE shall be able to measure all CSI-RS resources and/or SSB resources of the *nzp-CSI-RS-ResourceSet* and/or *csi-SSB-ResourceSet* within the CSI-Resource*Config* settings configured for L1-RSRP for the active BWP, provided that the number of resources, including the number of SSB resources of the cell with PCI different from serving cell configured for L1-RSRP measurements in 9.13, does not exceed the UE capability indicated by *beamManagementSSB-CSI-RS*.

The UE shall report the measurement quantity (*reportQuantity*) and send periodic, semi-persistent or aperiodic reports, according to the *reportConfigType* according to the CSI reporting configuration(s) (*CSI-ReportConfig*) for the active BWP.

9.5.2 Requirements applicability

The requirements in clause 9.5 apply, provided:

- The CSI-RS or SSB or CSI-RS and SSB resources configured for L1-RSRP measurements are measurable.

An SSB resource configured for L1-RSRP shall be considered measurable when for each relevant SSB the following conditions are met:

- L1-RSRP related side conditions given in clauses 10.1.19.1 and 10.1.20.1 for FR1 and FR2, respectively, for a corresponding band,
- SSB_RP and SSB Ês/Iot according to Annex B.2.4.1 for a corresponding band.

A CSI-RS resource configured for L1-RSRP shall be considered measurable when for each relevant CSI-RS the following conditions are met:

- L1-RSRP related side conditions given in clauses 10.1.19.2 and 10.1.20.2 for FR1 and FR2, respectively, for a corresponding band,
- CSI-RS_RP and CSI-RS Ês/Iot according to Annex B.2.4.2 for a corresponding band.

A CSI-RS and SSB resource configured for L1-RSRP shall be considered measurable when the measurable resource conditions are met for both CSI-RS resource and SSB resource.

Requirements are defined for periodic, semi-persistent and aperiodic resources.

9.5.3 Measurement Reporting Requirements

The UE shall send L1-RSRP reports only for report configurations configured for the active BWP.

The UE shall report the L1-RSRP value as a 7-bit value in the range [-140, -44] dBm with 1dB step size according to clause 10.1.19 for FR1 and 10.1.20 for FR2 if *nrofReportedRS* is configured to one. If *nrofReportedRS* is configured to be larger than one, or if *groupBasedBeamReporting* is enabled, the UE shall use differential L1-RSRP based reporting as defined in clause 10.1.19 for FR1 and 10.1.20 for FR2. The differential L1-RSRP is quantized to a 4-bit value with 2dB step size. The mapping between the reported L1-RSRP value and the measured quantity is described in 10.1.6.

In EN-DC and NE-DC operation, when the UE is configured to perform E-UTRA SRS carrier-based switching an additional delay can be expected in FR1 if the UE is capable of per-FR gap, or an additional delay can be expected in both FR1 and FR2 if the UE is not capable of per-FR gap.

9.5.3.1 Periodic Reporting

Reported L1-RSRP measurements contained in periodic L1-RSRP measurement reports shall meet the requirements in clauses 10.1.19 for FR1 and 10.1.20 for FR2, respectively.

The UE shall only send periodic L1-RSRP measurement reports for an active BWP.

The UE shall transmit the periodic L1-RSRP reporting on PUCCH over the air interface according to the periodicity defined in clause 5.2.1.4 in TS 38.214 [26].

9.5.3.2 Semi-Persistent Reporting

Reported L1-RSRP measurements contained in a Semi-Persistent L1-RSRP measurement report shall meet the requirements in clauses 10.1.19 for FR1 and 10.1.20 for FR2, respectively. This requirement applies for semi-persistent L1-RSRP reports send on PUSCH or PUCCH.

The UE shall only send semi-persistent L1-RSRP measurement reports on PUSCH, if a DCI request has been received.

The UE shall only send semi-persistent L1-RSRP measurement reports on PUCCH, if an activation command [7] has been received.

The UE shall transmit the semi-persistent L1-RSRP reporting on PUSCH or PUCCH over the air interface according to the periodicity defined in clause 5.2.1.4 in TS 38.214 [26].

9.5.3.3 Aperiodic Reporting

Reported L1-RSRP measurements contained in aperiodic triggered, aperiodic triggered periodic and aperiodic triggered semi-persistent L1-RSRP reports shall meet the requirements in clauses 10.1.19 for FR1 and 10.1.20 for FR2, respectively.

The UE shall only send aperiodic L1-RSRP measurement reports, if a DCI trigger has been received.

After the UE receives CSI request in DCI, the UE shall transmit the aperiodic L1-RSRP reporting on PUSCH over the air interface at the time specified according to clause 6.1.2.1 in TS 38.214 [26].

9.5.4 L1-RSRP measurement requirements

9.5.4.1 SSB based L1-RSRP Reporting

The UE shall be capable of performing L1-RSRP measurements based on the configured SSB resource for L1-RSRP computation, and the UE physical layer shall be capable of reporting L1-RSRP measured over the measurement period of $T_{L1\text{-}RSRP_Measurement_Period_SSB}$.

The value of $T_{L1\text{-}RSRP_Measurement_Period_SSB}$ is defined in Table 9.5.4.1-1 for FR1. The value of $T_{L1\text{-}RSRP_Measurement_Period_SSB}$ is defined in Table 9.5.4.1-2 for FR2 when *highSpeedMeasFlagFR2-r17* is not configured, and defined in Table 9.5.4.1-3 for FR2 power class 6 UE when *highSpeedMeasFlagFR2-r17* is configured, where

- M=1 if higher layer parameter *timeRestrictionForChannelMeasurement* is configured, and M=3 otherwise
- N= 8 in Table 9.5.4.1-2.

When UE supports concurrent measurement gap and concurrent gaps are configured,

- P value for SSB resource to be measured is defined as
  - N_{total} / $N_{outside_MG}$ in FR1
  - $P_{sharing\ factor}$ * N_{total} / $N_{outside_MG}$ in FR2 with $N_{available}$ = 0
  - N_{total} / $N_{available}$ in FR2 with Navailable > 0
- For a window W of duration max($T_{L1,}$ MGRP_max), where MGRP max is the maximum MGRP across all configured per-UE measurement gaps and per-FR measurement gaps within the same FR as serving cell, and starting at the beginning of any SSB resource occasion:
  - N_{total} is the total number of SSB resource occasions within the window, including those overlapped with measurement gap occasions or SMTC occasions within the window, and
  - $N_{outside_MG}$ is the number of SSB resource occasions that are not overlapped with any measurement gap occasion within the window W
  - $N_{available}$ is the number of SSB resource occasions that are not overlapped with any measurement gap occasion nor any SMTC occasion within the window W
  - T_{L1} is periodicity of the target SSB.

Otherwise, for a UE not supporting *concurrentMeasGap-r17* or when concurrent gaps are not configured,

For FR1,

- $P=\frac{1}{1-\frac{T_{SSB}}{xGP}}$, when in the monitored cell there are GAPs configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the SSB; and
- P=1 when in the monitored cell there are no GAPs overlapping with any occasion of the SSB.

For FR2,

$P_1 = \frac{1}{1-\frac{T_{SSB}}{T_{SMTCperiod}}}$, when SSB is not overlapped with measurement gap and SSB is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$).

- P is $P_{sharing\ factor}$, when SSB is not overlapped with measurement gap and SSB is fully overlapped with SMTC period ($T_{SSB} = T_{SMTCperiod}$).

- $P_1 = \frac{1}{1-\frac{T_{SSB}}{xRP}-\frac{T_{SSB}}{T_{SMTCperiod}}}$, when SSB is partially overlapped with GAP and SSB is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with GAP and

  - $T_{SMTCperiod} \neq xRP$ or

  - $T_{SMTCperiod} = xRP$ and $T_{SSB} < 0.5*T_{SMTCperiod}$

- P is $\frac{P_{sharing\ factor}}{1-\frac{T_{SSB}}{xRP}}$, when SSB is partially overlapped with GAP and SSB is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with GAP and $T_{SMTCperiod} = xRP$ and $T_{SSB} = 0.5*T_{SMTCperiod}$

- $P_1 = \frac{1}{1-\frac{T_{SSB}}{min(T_{SMTCperiod}, xRP)}}$, when SSB is partially overlapped with GAP ($T_{SSB} < xRP$) and SSB is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with GAP.

- P is $\frac{P_{sharing\ factor}}{1-\frac{T_{SSB}}{xRP}}$, when SSB is partially overlapped with measurement gap and SSB is fully overlapped with SMTC occasion ($T_{SSB} = T_{SMTCperiod}$) and SMTC occasion is partially overlapped with GAP ($T_{SMTCperiod} < xRP$)

- $P_{sharing\ factor} = 1$, if the SSB configured for L1-RSRP measurement outside measurement gap is

  - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and,

  - not overlapped with the RSSI symbols indicated by *ss-RSSI-Measurement* and 1data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured,

- $P_{sharing\ factor} = 3$, otherwise.

- If SSB resource from the cell with different PCI is configured for L1-RSRP measurement, and P_2 is valid accoding to 9.13.4.1, and any symbol of the SSBs from serving cell and cell with different PCI are overlapping or adjacent (in time domain)

  - $P = \frac{P_1}{1-\frac{P_1*T_{SSB}}{P_2*T_{SSB_CDP}}}$, if $P_1*T_{SSB} < P_2*T_{SSB_CDP}$.

  - $P = P_1$, if $P_1*T_{SSB} > P_2*T_{SSB_CDP}$.

  - $P = 2*P_1$, if $P_1*T_{SSB} = P_2*T_{SSB_CDP}$.

- Otherwise, $P = P_1$

Where:

- T_{SSB} = ssb-periodicityServingCell of the serving cell

- $T_{SMTCperiod}$ = the configured SMTC period

- T_{SSB_CDP} = SSB periodicity of the cell with PCI different from serving cell

- $P_{sharing\ factor} = 1$, if the SSB configured for L1-RSRP measurement outside gap is

- not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and,

- not overlapped by the RSSI symbols indicated by *ss-RSSI-Measurement* and 1 data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured.

- $P_{sharing\ factor}$ = 3, otherwise.

  - T_{SSB} = ssb-periodicityServingCell

  - $T_{SMTCperiod}$ = the configured SMTC period

- If the UE is configured with Pre-MG, an SSB or an SMTC occasion is only considered to be overlapped by the Pre-MG if the Pre-MG is activated.

- When a measurement gap is configured and the measurement gap is not NCSG,

  - an SSB or an SMTC occasion is considered to be overlapped with the GAP if it overlaps a measurement gap occasion, and

  - xRP = MGRP

- Otherwise, when NCSG measurement gap is configured,

  - an SSB or an SMTC occasion is considered to be overlapped with the GAP if

    - it overlaps the VIL1 or VIL2 of NCSG, or

    - it overlaps the ML of NCSG in FR2, and there exists a target carrier to be measured within NCSG that is intra-frequency carrier or inter-frequency carrier in the same band as the serving cell, or inter-frequency carrier in different band as the serving cell and UE does not support IBM between the target carrier and the serving cell,

- and

    - xRP = VIRP

- When concurrent gaps are configured, an SSB or an SMTC occasion is not considered to be overlapped by a gap occasion if the gap occasion is dropped according to 9.1.8.

If the high layer in TS 38.331 [2] signaling of *smtc2* is configured, $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc2*; Otherwise $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc1*. $T_{SMTCperiod}$ is the shortest SMTC period among all CCs in the same FR2 band, provided the SMTC offset of all CCs in FR2 have the same offset.

Longer evaluation period would be expected if the combination of SSB, SMTC occasion and GAP configurations does not meet pervious conditions.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer L1 RSRP measurement period would be expected during the period $T_{identify_CGI,E\text{-}UTRAN}$ when the UE is requested to decode an LTE CGI.

Table 9.5.4.1-1: Measurement period $T_{L1\text{-}RSRP_Measurement_Period_SSB}$ for FR1

Configuration	$T_{L1\text{-}RSRP_Measurement_Period_SSB}$ (ms)
non-DRX	$\max(T_{Report}, \text{ceil}(M*P)*T_{SSB})$
DRX cycle ≤ 320ms	$\max(T_{Report}, \text{ceil}(K*M*P)*\max(T_{DRX},T_{SSB}))$
DRX cycle > 320ms	$\text{ceil}(M*P)*T_{DRX}$

Note 1:	T_{SSB} = ssb-periodicityServingCell is the periodicity of the SSB-Index configured for L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting.
Note 2:	K = 1 when T_{SSB} ≤ 40 ms and *highSpeedMeasFlag-r16 or highSpeedMeasCA-Scell-r17* are configured; otherwise K = 1.5.
Note 3:	When *highSpeedMeasFlag-r16* is configured, the requirements apply only to UE supporting either *measurementEnhancement-r16* or *intraNR-MeasurementEnhancement-r16. or measurementEnhancementCA-r17*

Table 9.5.4.1-2: Measurement period $T_{L1\text{-}RSRP_Measurement_Period_SSB}$ for FR2

Configuration	$T_{L1\text{-}RSRP_Measurement_Period_SSB}$ (ms)
non-DRX	max(T_{Report}, ceil(M*P*N)*T_{SSB})
DRX cycle ≤ 320ms	max(T_{Report}, ceil(1.5*M*P*N)*max(T_{DRX},T_{SSB}))
DRX cycle > 320ms	ceil(1.5*M*P*N)*T_{DRX}
Note:	T_{SSB} = ssb-periodicityServingCell is the periodicity of the SSB-Index configured for L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting.

Table 9.5.4.1-3: Measurement period $T_{L1\text{-}RSRP_Measurement_Period_SSB}$ configured with *highSpeedMeasFlagFR2-r17* for FR2

Configuration	$T_{L1\text{-}RSRP_Measurement_Period_SSB}$ (ms)
non-DRX	max(T_{Report}, ceil(M*P*N1^{Note2})*T_{SSB})
DRX cycle ≤ 80ms	max(T_{Report}, ceil(M*P*N1^{Note2}*M2)*max(T_{DRX},T_{SSB}))
80ms< DRX ≤ 320ms	max(T_{Report}, ceil(1.5*M*P*N)*max(T_{DRX},T_{SSB}))
DRX cycle > 320ms	ceil(1.5*M*P*N)*T_{DRX}
Note1:	T_{SSB} = ssb-periodicityServingCell is the periodicity of the SSB-Index configured for L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting.
Note 2:	N1 = 2 when *highSpeedMeasFlagFR2-r17* = set1; N1 = 6 when *highSpeedMeasFlagFR2-r17* = [set2].
Note 3:	M2 = 1.5 if SMTC periodicity > 40 ms; otherwise M2 = 1

9.5.4.2 CSI-RS based L1-RSRP Reporting

The UE shall be capable of performing L1-RSRP measurements based on the configured CSI-RS resource for L1-RSRP computation, and the UE physical layer shall be capable of reporting L1-RSRP measured over the measurement period of $T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS}$.

The value of $T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS}$ is defined in Table 9.5.4.2-1 for FR1 and in Table 9.5.4.2-2 for FR2, where

- For periodic and semi-persistent CSI-RS resources, M=1 if higher layer parameter *timeRestrictionForChannelMeasurement* is configured, and M=3 otherwise
- For aperiodic CSI-RS resources M=1
- For periodic CSI-RS resources in a resource set configured with higher layer parameter *repetition* set to OFF, N=1. The requirements apply if *qcl-InfoPeriodicCSI-RS* is configured for all the resources in the resource set and for each resource one RS has QCL-TypeD with
  - SSB for L1-RSRP measurement, or
  - another CSI-RS in resource set configured with repetition ON.
- For periodic CSI-RS resources in a resource set configured with higher layer parameter *repetition* set to ON, N=ceil(*maxNumberRxBeam* / $N_{res_per_set}$), where $N_{res_per_set}$ is number of resources in the resource set. The requirements apply provided *qcl-InfoPeriodicCSI-RS* is configured with QCL-TypeD for all resources in the resource set.

- For semi-persistent CSI-RS resources in a resource set configured with higher layer parameter *repetition* set to OFF, N=1. The requirements apply provided TCI state is provided for all resources in the resource set in the MAC CE activating the resource set and for each resource one RS has QCL-TypeD with
  - SSB for L1-RSRP measurement, or
  - another CSI-RS in resource set configured with repetition ON.
- For semi-persistent CSI-RS resources in a resource set configured with higher layer parameter *repetition* set to ON, N=ceil(*maxNumberRxBeam* / $N_{res_per_set}$), where $N_{res_per_set}$ is number of resources in the resource set. The requirements apply provided TCI state is provided with QCL-TypeD for all resources in the resource set in the MAC CE activating the resource set.
- For aperiodic CSI-RS resources in a resource set configured with higher layer parameter *repetition* set to OFF, N=1. The requirements apply provided *qcl-info* is configured for all resources in the resource set and for each resource one RS has QCL-TypeD with
  - SSB for L1-RSRP measurement, or
  - another CSI-RS in resource set configured with repetition ON.
- For aperiodic CSI-RS resources in a resource set configured with higher layer parameter *repetition* set to ON, N=1. UE is not required to meet the accuracy requirements in clause 10.1.19.2 and 10.1.20.2 if number of resources in the resource set is smaller than *maxNumberRxBeam*. The requirements apply provided *qcl-info* is configured with QCL-TypeD for all resources in the resource set.

When UE supports [concurrent measurement gap] and concurrent gaps are configured,

- P value for a CSI-RS resource to be measured is defined as
  - N_{total} / $N_{outside_MG}$ in FR1
  - $P_{sharing\ factor}$ * N_{total} / $N_{outside_MG}$ in FR2 with $N_{available}$ = 0
  - N_{total} / $N_{available}$ in FR2 with Navailable > 0
- For a window W of duration max($T_{L1,}$ MGRP_max), where MGRP max is the maximum MGRP across all configured per-UE measurement gaps and per-FR measurement gaps within the same FR as serving cell, and starting at the beginning of any CSI-RS resource occasion:
  - N_{total} is the total number of CSI-RS resource occasions within the window, including those overlapped with measurement gap occasions or SMTC occasions within the window, and
  - $N_{outside_MG}$ is the number of CSI-RS resource occasions that are not overlapped with any measurement gap occasion within the window W
  - $N_{available}$ is the number of CSI-RS resource occasions that are not overlapped with any measurement gap occasion nor any SMTC occasion within the window W

  T_{L1} is periodicity of the target CSI-RS.

Otherwise, for a UE not supporting *concurrentMeasGap-r17* or when concurrent gaps are not configured,

For FR1,

- $P=\frac{1}{1-\frac{T_{CSI-RS}}{xRP}}$, when in the monitored cell there are GAPs configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the CSI-RS; and
- P=1 when in the monitored cell there are no GAPs overlapping with any occasion of the CSI-RS.

For FR2,

- P=1, when CSI-RS is not overlapped with a GAP and also not overlapped with SMTC occasion.

- $P=\frac{1}{1-\frac{T_{CSI-RS}}{xRP}}$, when CSI-RS is partially overlapped with GAP and CSI-RS is not overlapped with SMTC occasion (T_{CSI-RS} < xRP)

- $P=\frac{1}{1-\frac{T_{CSI-RS}}{T_{SMTCperiod}}}$, when CSI-RS is not overlapped with GAP and CSI-RS is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$).

- $P=P_{sharing\ factor}$, when CSI-RS is not overlapped with GAP and CSI-RS is fully overlapped with SMTC occasion ($T_{CSI-RS} = T_{SMTCperiod}$).

- P=1, when aperiodic CSI-RS resource is not overlapped with GAP

- $P=\frac{1}{1-\frac{T_{CSI-RS}}{xRP}-\frac{T_{CSI-RS}}{T_{SMTCperiod}}}$, when CSI-RS is partially overlapped with GAP and CSI-RS is partially overlapped with SMTC occasion (TCSI-RS < $T_{SMTCperiod}$) and SMTC occasion is not overlapped with GAP and

  - $T_{SMTCperiod} \neq$ xRP or

  - $T_{SMTCperiod}$ = xRP and $T_{CSI-RS} < 0.5*T_{SMTCperiod}$

- $P=\frac{3}{1-\frac{T_{CSI-RS}}{xRP}}$, when CSI-RS is partially overlapped with [measurement gap] and CSI-RS is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with GAP and $T_{SMTCperiod}$ = xRP and $T_{CSI-RS} = 0.5*T_{SMTCperiod}$

- $P=\frac{1}{1-\frac{T_{CSI-RS}}{T_{SMTCperiod}}}$, when CSI-RS is partially overlapped with GAP (T_{CSI-RS} < xRP) and CSI-RS is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with GAP.

- $P=\frac{P_{sharing\ factor}}{1-\frac{T_{CSI-RS}}{xRP}}$, when CSI-RS is partially overlapped with GAP and CSI-RS is fully overlapped with SMTC occasion ($T_{CSI-RS} = T_{SMTCperiod}$) and SMTC occasion is partially overlapped with GAP ($T_{SMTCperiod}$ < xRP)

Where:

- $P_{sharing\ factor}$ = 1, if the CSI-RS configured for L1-RSRP measurement outside gap is

  - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and,

  - not overlapped by the RSSI symbols indicated by *ss-RSSI-Measurement* and 1 data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured.

- $P_{sharing\ factor}$ = 3, otherwise.

$T_{SMTCperiod}$ = the configured SMTC period.

T_{CSI-RS} = the periodicity of CSI-RS configured for L1-RSRP measurement

If the UE is configured with Pre-MG, a CSI-RS or an SMTC occasion is only considered to be overlapped by the Pre-MG if the Pre-MG is activated.

- When a measurement gap is configured and the measurement gap is not NCSG,

  - a CSI-RS or an SMTC occasion is considered to be as overlapped with the GAP if it overlapps a measurement gap occasion, and

  - xRP = MGRP

- Otherwise, when NCSG measurement gap is configured,

- a CSI-RS or an SMTC occasion is considered to be as overlapped with the GAP if
  - it overlaps the VIL1 or VIL2 of NCSG, or
  - it overlaps the ML of NCSG in FR2, and there exists a target carrier to be measured within NCSG that is intra-frequency carrier or inter-frequency carrier in the same band as the serving cell, or inter-frequency carrier in different band as the serving cell and UE does not support IBM between the target carrier and the serving cell,
- and
  - xRP = VIRP

When concurrent gaps are configured, a CSI-RS or an SMTC occasion is not considered to be overlapped by a gap occasion if the gap occasion is dropped according to 9.1.8.

Table 9.5.4.2-1: Measurement period $T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS}$ for FR1

Configuration	$T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS}$ (ms)
non-DRX	$\max(T_{Report}, \text{ceil}(M*P)*T_{CSI\text{-}RS})$
DRX cycle ≤ 320ms	$\max(T_{Report}, \text{ceil}(K*M*P)*\max(T_{DRX},T_{CSI\text{-}RS}))$
DRX cycle > 320ms	$\text{ceil}(M*P)*T_{DRX}$
Note 1: $T_{CSI\text{-}RS}$ is the periodicity of CSI-RS configured for L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting. Note 2: the requirements are applicable provided that the CSI-RS resource configured for L1-RSRP measurement is transmitted with Density = 3. Note 3: K = 1 when $T_{CSI\text{-}RS}$ ≤ 40 ms and *highSpeedMeasFlag-r16 or highSpeedMeasCA-Scell-r17* are configured; otherwise K = 1.5. Note 4: When *highSpeedMeasFlag-r16* is configured, the requirements apply only to UE supporting either *measurementEnhancement-r16* or *intraNR-MeasurementEnhancement-r16 or measurementEnhancementCA-r17.*	

Table 9.5.4.2-2: Measurement period $T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS}$ for FR2

Configuration	$T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS}$ (ms)
non-DRX	$\max(T_{Report}, \text{ceil}(M*P*N)*T_{CSI\text{-}RS})$
DRX cycle ≤ 320ms	$\max(T_{Report}, \text{ceil}(1.5*M*P*N)*\max(T_{DRX},T_{CSI\text{-}RS}))$
DRX cycle > 320ms	$\text{ceil}(M*P*N)*T_{DRX}$
Note 1: $T_{CSI\text{-}RS}$ is the periodicity of CSI-RS configured for L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting. Note 2: the requirements are applicable provided that the CSI-RS resource configured for L1-RSRP measurement is transmitted with Density = 3.	

9.5.4A Void

9.5.4A.1 Void

Table 9.5.4A.1-1: Void

9.5.5 Measurement restriction for CSI-RS and SSB for L1-RSRP measurement

The UE is required to be capable of measuring SSB and CSI-RS for L1-RSRP without measurement gaps. The UE is required to perform the SSB and CSI-RS measurements with measurement restrictions as described in the following clauses.

9.5.5.1 Measurement restriction for SSB based L1-RSRP

For FR1, when the SSB for L1-RSRP measurement is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for L1-RSRP measurement without any restriction;
- If SSB and CSI-RS have different SCS,
  - If UE supports simultaneousRxDataSSB-DiffNumerology, UE shall be able to measure the SSB for L1-RSRP measurement without any restriction;
  - If UE does not support simultaneousRxDataSSB-DiffNumerology, UE is required to measure one of but not both SSB for L1-RSRP measurement and CSI-RS. Longer measurement period for SSB based L1-RSRP measurement is expected, and no requirements are defined.

For FR2, when the SSB for L1-RSRP measurement on one CC is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both SSB for L1-RSRP measurement and CSI-RS. Longer measurement period for SSB based L1-RSRP measurement is expected, and no requirements are defined.

For FR2, when the SSB for L1-RSRP measurement on one CC is in the same OFDM symbol as SSB from cell with additional PCI for BFD, CBD measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both SSBs. Longer measurement period for SSB based L1-RSRP measurement is expected, and no requirements are defined.

For FR2, if the network configures same or mixed numerology between SSB for L1-RSRP measurement on one FR2 band and CSI-RS for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement on the other FR2 band, UE shall be able to perform the related SSB based measurements in one band without any measurement restrictions in the other band, provided that UE is capable of independent beam management on this FR2 band pair.

9.5.5.2 Measurement restriction for CSI-RS based L1-RSRP

The SSB mentioned in this clause can be associated with either the serving cell PCI or a PCI different from serving cell PCI.

For both FR1 and FR2, when the CSI-RS for L1-RSRP measurement is in the same OFDM symbol as SSB for RLM, BFD, CBD or L1-RSRP measurement, UE is not required to receive CSI-RS for L1-RSRP measurement in the PRBs that overlap with an SSB.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has same SCS than CSI-RS for L1-RSRP measurement, the UE shall be able to perform CSI-RS measurement without restrictions.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has different SCS than CSI-RS for L1-RSRP measurement, the UE shall be able to perform CSI-RS measurement with restrictions according to its capabilities:

- If the UE supports *simultaneousRxDataSSB-DiffNumerology* the UE shall be able to perform CSI-RS measurement without restrictions.
- If the UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both CSI-RS for L1-RSRP measurement and SSB. Longer measurement period for CSI-RS based L1-RSRP measurement is expected, and no requirements are defined.

For FR1, when the CSI-RS for L1-RSRP measurement is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement, UE shall be able to measure the CSI-RS for L1-RSRP measurement without any restriction.

For FR2, when the CSI-RS for L1-RSRP measurement on one CC is in the same OFDM symbol as SSB for RLM, BFD or L1-RSRP measurement on the same CC or different CCs in the same band, or in the same symbol as SSB for CBD measurement on the same CC or different CCs in the same band when beam failure is detected, UE is required to measure one of but not both CSI-RS for L1-RSRP measurement and SSB. Longer measurement period for CSI-RS based L1-RSRP measurement is expected, and no requirements are defined.

For FR2, when the CSI-RS for L1-RSRP measurement on one CC is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band,

- In the following cases, UE is required to measure one of but not both CSI-RS for L1-RSRP measurement and the other CSI-RS. Longer measurement period for CSI-RS based L1-RSRP measurement is expected, and no requirements are defined.
  - The CSI-RS for L1-RSRP measurement or the other CSI-RS in a resource set configured with repetition ON, or
  - The other CSI-RS is configured in q1 and beam failure is detected, or
  - The two CSI-RS-es are not QCL-ed w.r.t. QCL-TypeD, or the QCL information is not known to UE,
- Otherwise, UE shall be able to measure the CSI-RS for L1-RSRP measurement without any restriction.

9.5.6 Scheduling availability of UE during L1-RSRP measurement

Scheduling availability restrictions described in the following clauses apply when the UE is performing L1-RSRP measurement on serving cell, and UE is receiving PDCCH/PDSCH from serving cell and/or cell(s) with different PCI.

9.5.6.1 Scheduling availability of UE performing L1-RSRP measurement with a same subcarrier spacing as PDSCH/PDCCH on FR1

There are no scheduling restrictions due to L1-RSRP measurement performed on SSB and CSI-RS configured as RS for L1-RSRP measurement with the same SCS as PDSCH/PDCCH in FR1.

9.5.6.2 Scheduling availability of UE performing L1-RSRP measurement with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UEs which support *simultaneousRxDataSSB-DiffNumerology* [14] there are no restrictions on scheduling availability due to L1-RSRP measurement based on SSB as RS for L1-RSRP measurement. For UEs which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to L1-RSRP measurement based on SSB configured for L1-RSRP measurement.

- The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on symbols corresponding to the SSB indexes configured for L1-RSRP measurement.

When intra-band carrier aggregation in FR1 is configured, the scheduling restrictions on serving cell where L1-RSRP measurement is performed apply to all serving cells in the same band on the symbols that fully or partially overlap with restricted symbols. When inter-band carrier aggregation within FR1 is configured, there are no scheduling restrictions on FR1 serving cell(s) configured in other bands than the bands in which the serving cell where L1-RSRP measurement is performed is configured.

9.5.6.3 Scheduling availability of UE performing L1-RSRP measurement on FR2

The following scheduling restriction applies due to L1-RSRP measurement.

- For the case where RS for L1-RSRP measurement is CSI-RS which is QCLed with active TCI state for PDCCH/PDSCH and not in a CSI-RS resource set with repetition ON, and N=1 applies as specified in clause 9.5.4.2

- There are no scheduling restrictions due to L1-RSRP measurement performed based on the CSI-RS.

- Otherwise

  - In non-HST scenario, for FR2-1 or the reference symbols to be measured for L1-RSRP is not using 480 kHz SCS or 960 kHz SCS on FR2-2, the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on

    - symbols corresponding to the SSB indexes configured for L1-RSRP measurement, and/or

    - symbols corresponding to the periodic CSI-RS resource configured for L1-RSRP measurement, and/or

    - symbols corresponding to the semi-perssitent CSI-RS resource configured for L1-RSRP measurement when the resource is activated, and/or

    - symbols corresponding to the aperiodic CSI-RS resource configured for L1-RSRP measurement when the reporting is triggered.

  - For FR2-2 and the reference symbols to be measured for L1-RSRP is using 480 kHz SCS or 960 kHz SCS, the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on

    - symbols corresponding to the SSB indexes configured for L1-RSRP measurement, and on one data symbol before and one data symbol after the symbols corresponding to the SSB indexes configured for L1-RSRP measurement, and/or

    - symbols corresponding to the periodic CSI-RS resource configured for L1-RSRP measurement, and on one data symbol before and one data symbol after the symbols corresponding to the periodic CSI-RS resource configured for L1-RSRP measurement, and/or

    - symbols corresponding to the semi-perssitent CSI-RS resource configured for L1-RSRP measurement when the resource is activated, and on one data symbol before and one data symbol after the symbols corresponding to the semi-perssitent CSI-RS resource configured for L1-RSRP measurement when the resource is activated, and/or

    - symbols corresponding to the aperiodic CSI-RS resource configured for L1-RSRP measurement when the reporting is triggered, and on one data symbol before and one data symbol after the symbols corresponding to the aperiodic CSI-RS resource configured for L1-RSRP measurement when the reporting is triggered.

  - In HST scenario, the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on

    - symbols corresponding to the SSB indexes configured for L1-RSRP measurement and 1 data symbol before each consecutive SSB symbols to be measured for L1-RSRP and 1 data symbol after each consecutive SSB symbols to be measured for L1-RSRP, and/or

    - symbols corresponding to the periodic CSI-RS resource configured for L1-RSRP measurement and 1 data symbol before each periodic CSI-RS resource to be measured for L1-RSRP and 1 data symbol after each periodic CSI-RS for L1-RSRP measurement symbols to be measured for L1-RSRP, and/or

    - symbols corresponding to the semi-persistent CSI-RS resource configured for L1-RSRP measurement and 1 data symbol before each semi-persistent CSI-RS resource to be measured for L1-RSRP and 1 data symbol after each semi-persistent CSI-RS resource to be measured for L1-RSRP when the resource is activated, and/or

    - symbols corresponding to the aperiodic CSI-RS resource configured for L1-RSRP measurement and 1 data symbol before each aperiodic CSI-RS resource to be measured for L1-RSRP measurement and 1 data symbol after each aperiodic CSI-RS resource to be measured for L1-RSRP measurement when the reporting is triggered.

When intra-band carrier aggregation in FR2 is performed, the scheduling restrictions on serving cell where L1-RSRP measurement is performed apply to all serving cells in the band on the symbols that fully or partially overlap with restricted symbols.

When inter-band carrier aggregation in FR2 is performed, there are no scheduling restrictions on FR2 serving cells in the bands due to L1-RSRP measurement performed on FR2 serving cell(s) in different band(s), provided that UE is capable of independent beam management on this FR2 band pair. Additionally, there is no scheduling restriction if the UE is configured with different numerology between SSB on one FR2 band and data on the other FR2 band provided the UE is configured for IBM operation for the band pair.

If following conditions are met,

- UE has been notified about system information update through paging,
- The gap between UE's reception of PDCCH that UE monitors in the Type 2-PDCCH CSS set and that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots,

For the SSB and CORESET for RMSI scheduling multiplexing patterns 3, UE is expected to receive the PDCCH that UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured for L1-RSRP measurement; and

For the SSB and CORESET for RMSI scheduling multiplexing patterns 2, UE is expected to receive PDSCH that corresponds to the PDCCH that UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured for L1-RSRP measurement.

9.5.6.4 Scheduling availability of UE performing L1-RSRP measurement on FR1 or FR2 in case of FR1-FR2 inter-band CA

There are no scheduling restrictions on FR1 serving cell(s) due to L1-RSRP measurement performed on FR2 serving cell(s).

There are no scheduling restrictions on FR2 serving cell(s) due to L1-RSRP measurement performed on FR1 serving cell(s).

9.5A L1-RSRP measurements for Reporting under CCA

9.5A.1 Introduction

When configured by the network, the UE shall be able to perform L1-RSRP measurements of configured SSB resources for L1-RSRP. The measurements shall be performed for a serving cell under CCA operating mode, including PCell, PSCell, or SCell, on the resources configured for L1-RSRP measurements within the active BWP.

The UE shall be able to measure all SSB resources of the *csi-SSB-ResourceSet* within the *CSI-ResourceConfig* settings configured for L1-RSRP for the active BWP, provided that the number of resources does not exceed the UE capability indicated by *beamManagementSSB-CSI-RS*.

The UE shall report the measurement quantity (*reportQuantity*) and send periodic, semi-persistent or aperiodic reports, according to the *reportConfigType* according to the CSI reporting configuration(s) (*CSI-ReportConfig*) for the active BWP.

During EN-DC operation in FR-1, when the UE is configured to perform E-UTRA SRS carrier-based switching, an additional delay can be expected.

The requirements in clause 9.5A apply for any *channelAccessMode* configuration [TS 38.331, 2].

In the requirements of clause 9.5A, the term SSB occasion not available at the UE refers to when the SSB is configured by gNB in a cell on a carrier frequency subject to CCA, but the first two successive candidate SSB positions for the same SS/PBCH block index within the set of configured SSB are not available at the UE due to DL CCA failures at gNB during the corresponding evaluation or measurement period; otherwise the SSB occasion is considered as available at the UE.

9.5A.2 Requirements applicability

The requirements in clause 9.5A apply, provided:

- The SSB resources configured for L1-RSRP measurements are measurable.

An SSB resource configured for L1-RSRP shall be considered measurable when for each relevant SSB the following conditions are met:

- L1-RSRP related side conditions given in clause 10.1.19.1 for FR1 for a corresponding band,
- SSB_RP and SSB Ês/Iot according to Annex B.2.4.1 for a corresponding band.

An SSB resource configured for L1-RSRP shall be considered measurable when the measurable resource conditions are met for SSB resource.

Requirements are defined for periodic, semi-persistent and aperiodic resources.

9.5A.3 Measurement Reporting Requirements

The UE shall send L1-RSRP reports only for report configurations configured for the active BWP.

The UE shall report the L1-RSRP value as a 7-bit value in the range [-140, -44] dBm with 1dB step size according to clause 10.1.19 for FR1 and 10.1.20 for FR2-2 if *nrofReportedRS* is configured to one. If *nrofReportedRS* is configured to be larger than one, or if *groupBasedBeamReporting* is enabled, the UE shall use differential L1-RSRP based reporting as defined in clause 10.1.19 for FR1 and 10.1.20 for FR2-2. The differential L1-RSRP is quantized to a 4-bit value with 2dB step size. The mapping between the reported L1-RSRP value and the measured quantity is described in 10.1.6.

During EN-DC operation, for FR1, when the UE is configured to perform E-UTRA SRS carrier-based switching an additional delay can be expected if the UE is capable of per-FR gap, or an additional delay can be expected.

9.5A.3.1 Periodic Reporting

Reported L1-RSRP measurements contained in periodic L1-RSRP measurement reports shall meet the requirements in clauses 10.1.19 for FR1 and 10.1.20 for FR2-2, respectively.

The UE shall only send periodic L1-RSRP measurement reports for an active BWP.

The UE shall transmit the periodic L1-RSRP reporting on PUCCH over the air interface according to the periodicity defined in clause 5.2.1.4 in TS 38.214 [26].

9.5A.3.2 Semi-Persistent Reporting

Reported L1-RSRP measurements contained in a Semi-Persistent L1-RSRP measurement report shall meet the requirements in clauses 10.1.19 for FR1 and 10.1.20 for FR2-2, respectively. This requirement applies for semi-persistent L1-RSRP reports send on PUSCH or PUCCH.

The UE shall only send semi-persistent L1-RSRP measurement reports on PUSCH, if a DCI request has been received.

The UE shall only send semi-persistent L1-RSRP measurement reports on PUCCH, if an activation command [7] has been received.

The UE shall transmit the semi-persistent L1-RSRP reporting on PUSCH or PUCCH over the air interface according to the periodicity defined in clause 5.2.1.4 in TS 38.214 [26].

When CCA is used on target frequency, if UE cannot transmit HARQ-ACK for the MAC CE activation command due to UL CCA failure, the UE shall not perform MAC CE activation at the MAC action time based on the originally scheduled HARQ-ACK transmission time specified in clause 5.2.1.5.2 in TS 38.214 [26].

When CCA is used on target frequency, if UE cannot transmit HARQ-ACK for the MAC CE deactivation command due to UL CCA failure, the UE shall perform MAC CE deactivation at the MAC action time based on the originally scheduled HARQ-ACK transmission time specified in clause 5.2.1.5.2 in TS 38.214 [26].

9.5A.3.3 Aperiodic Reporting

Reported L1-RSRP measurements contained in aperiodic triggered, aperiodic triggered periodic and aperiodic triggered semi-persistent L1-RSRP reports shall meet the requirements in clauses 10.1.19 for FR1 and 10.1.20 for FR2-2, respectively.

The UE shall only send aperiodic L1-RSRP measurement reports if a DCI trigger has been received.

After the UE receives CSI request in DCI, the UE shall transmit the aperiodic L1-RSRP reporting on PUSCH over the air interface at the time specified according to clause 6.1.2.1 in TS 38.214 [26].

9.5A.4 L1-RSRP measurement requirements

9.5A.4.1 SSB based L1-RSRP Reporting

The value of $T_{L1\text{-}RSRP_Measurement_Period_SSB_CCA}$ is defined in Table 9.5A.4.1-1 for FR1, and in Table 9.5A.4.1-2 for FR2-2, where,

- M=1 if higher layer parameter *timeRestrictionForChannelMeasurement* is configured, and M=3 otherwise
- N = TBD

For FR1 when UE supports concurrent measurement gap and concurrent gaps configured,

- P value for an SSB resource to be measured is defined as N_{total} / $N_{outside_MG}$
- For a window W of duration max(T_{L1}, MGRP_max), where MGRP max is the maximum MGRP across all configured per-UE measurement gaps and per-FR measurement gaps within the same FR as serving cell, and starting at the beginning of any SSB resource occasion:
  - N_{total} is the total number of SSB resource occasions within the window, including those overlapped with measurement gap occasions within the window, and
  - $N_{outside_MG}$ is the number of SSB resource occasions that are not overlapped with any measurement gap occasion within the window W

Otherwise, for a UE not supporting *concurrentMeasGap-r17* or when concurrent gaps are not configured,

For FR1,

- $P=\frac{1}{1-\frac{T_{SSB}}{xGP}}$, when in the monitored cell there are GAPs configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the SSB; and
- P=1 when in the monitored cell there are no GAPs overlapping with any occasion of the SSB.

For FR2-2,

- $P=\frac{1}{1-\frac{T_{SSB}}{T_{SMTCperiod}}}$, when SSB is not overlapped with measurement gap and SSB is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$).
- P is $P_{sharing\ factor}$, when SSB is not overlapped with measurement gap and SSB is fully overlapped with SMTC period ($T_{SSB} = T_{SMTCperiod}$).
- $P=\frac{1}{1-\frac{T_{SSB}}{MGRP}-\frac{T_{SSB}}{T_{SMTCperiod}}}$, when SSB is partially overlapped with measurement gap and SSB is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and
  - $T_{SMTCperiod} \neq$ MGRP or
  - $T_{SMTCperiod}$ = MGRP and $T_{SSB} < 0.5*T_{SMTCperiod}$

- P is $\frac{P_{\text{sharing factor}}}{1-\frac{T_{SSB}}{MGRP}}$, when SSB is partially overlapped with measurement gap and SSB is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and $T_{SMTCperiod}$ = MGRP and $T_{SSB} = 0.5*T_{SMTCperiod}$

- P= $\frac{1}{1-\frac{T_{SSB}}{T_{SMTCperiod}}}$, when S SSB is partially overlapped with measurement gap (T_{SSB} <MGRP) and SSB is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with measurement gap.

- P is $\frac{P_{\text{sharing factor}}}{1-\frac{T_{SSB}}{MRGP}}$, when SSB is partially overlapped with measurement gap and SSB is fully overlapped with SMTC occasion ($T_{SSB} = T_{SMTCperiod}$) and SMTC occasion is partially overlapped with measurement gap ($T_{SMTCperiod}$ < MGRP)

- $P_{\text{sharing factor}}$ = 1, if the SSB configured for L1-RSRP measurement outside measurement gap is

  - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and,

  - not overlapped with the RSSI symbols indicated by *ss-RSSI-Measurement* and 1data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured,

- $P_{\text{sharing factor}}$ = 3, otherwise.

Where:

$P_{\text{sharing factor}}$ = 1, if the SSB resource outside gap is

not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and,

not overlapped by the RSSI symbols indicated by *ss-RSSI-Measurement* and 1 data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement,* given that *ss-RSSI-Measurement* is configured.

$P_{\text{sharing factor}}$ = 3, otherwise.

T_{SSB} = ssb-periodicityServingCell

$T_{SMTCperiod}$ = the configured SMTC1 period or SMTC2 period if configured

If the UE is configured with Pre-MG, an SSB is only considered to be overlapped by the Pre-MG if the Pre-MG is activated.

- When a measurement gap is configured,

  - an SSB is considered to be overlapped with the GAP if it overlaps a measurement gap occasion, and

  - xRP = MGRP

- When NCSG is configured,

  - an SSB is considered to be overlapped with the GAP if it overlaps the VIL1 or VIL2 of NCSG, and

  - xRP = VIRP

- When concurrent gaps are configured, an SSB or an SMTC occasion is not considered to be overlapped by a gap occasion if the gap occasion is dropped according to 9.1.8.

If the high layer in TS 38.331 [2] signaling of *smtc2* is configured, $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc2*; Otherwise $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc1*.

Longer evaluation period would be expected if the combination of SSB, SMTC occasion and measurement gap configurations does not meet pervious conditions.

UE shall report RSRP_0 (Not valid) if $L_1 > L_{1max}$, where L1 and $L1_{max}$ are defined in Table 9.5A.4.1-1.

Table 9.5A.4.1-1: Measurement period $T_{L1\text{-}RSRP_Measurement_Period_SSB_CCA}$ for FR1

Configuration	$T_{L1\text{-}RSRP_Measurement_Period_SSB_CCA}$ (ms)
non-DRX	$\max(T_{Report}, \text{ceil}((M+L1)*P)*T_{SSB})$
DRX cycle ≤ 320ms	$\max(T_{Report}, \text{ceil}(1.5*(M+L1)*P)*\max(T_{DRX},T_{SSB}))$
DRX cycle > 320ms	$\text{ceil}((M+L1)*P)*T_{DRX}$
Note 1: T_{SSB} = ssb-periodicityServingCell is the periodicity of the SSB-Index configured for L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting. Note 2: L1=0 if higher layer parameter timeRestrictionForChannelMeasurement is configured. Otherwise, when DRX is not configured L1 is the number of SSBs not available at the UE during $T_{L1\text{-}RSRP_Measurement_Period_SSB_CCA}$, and when DRX is configured L1 is the number of DRX cycles in which at least one SSB is not available at the UE during $T_{L1\text{-}RSRP_Measurement_Period_SSB_CCA}$, where $L1 \le L1_{max}$. The UE is not required to determine the availability of SSB occasions more frequent than Once per $\max(T_{Report}, P * T_{SSB})$ if no DRX is used, Once per $\max(T_{Report}, \text{Ceil}(1.5 * P) * \max(T_{DRX}, T_{SSB}))$ if DRX cycle ≤ 320ms, Once per $P * T_{DRX}$ if DRX cycle > 320ms. Note 3: $L1_{max}$ =7 for $\max(T_{DRX},T_{SSB}) \le 40$ms assuming T_{DRX}=0 for non-DRX, $L1_{max}$ =5 for 40ms < $\max(T_{DRX}, T_{SSB}) \le 320$ms, $L1_{max}$ =3 for T_{DRX} > 320ms.	

Table 9.5A.4.1-2: Measurement period $T_{L1\text{-}RSRP_Measurement_Period_SSB_CCA}$ for FR2-2

Configuration	$T_{L1\text{-}RSRP_Measurement_Period_SSB_CCA}$ (ms)
non-DRX	$\max(T_{Report}, \text{ceil}((M+L1)*P*N)*T_{SSB})$
DRX cycle ≤ 320ms	$\max(T_{Report}, \text{ceil}(1.5*(M+L1)*P*N)*\max(T_{DRX},T_{SSB}))$
DRX cycle > 320ms	$\text{ceil}(1.5*(M+L1)*P*N)*T_{DRX}$
Note 1: T_{SSB} = ssb-periodicityServingCell is the periodicity of the SSB-Index configured for L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting. Note 2: L1=0 if higher layer parameter timeRestrictionForChannelMeasurement is configured. Otherwise, when DRX is not configured L1 is the number of SSB occasion groups not available at the UE during $T_{L1\text{-}RSRP_Measurement_Period_SSB_CCA}$, where $L1 \le L1_{max}$. An SSB occasions group consists of N consecutive SSB occasions, and the SSB occasions group is not available at the UE when at least one SSB occasion in the group is not transmitted by the gNB. When DRX is configured, L1 is the number of DRX cycle groups in which at least one SSB occasion is not available at the UE during $T_{L1\text{-}RSRP_Measurement_Period_SSB_CCA}$, where $L1 \le L1_{max}$. A DRX group consists of N DRX cycles, and the DRX cycle group is not available when there is at least one DRX in which at least one SSB occasion is not available. The UE is not required to determine the availability of SSB occasions more frequent than once per DRX cycle length, when configured with DRX. Note 3: $L1_{max}$ =7 for $\max(T_{DRX},T_{SSB}) \le 40$ms assuming T_{DRX}=0 for non-DRX, $L1_{max}$ =5 for 40ms < $\max(T_{DRX}, T_{SSB}) \le 320$ms, $L1_{max}$ =3 for T_{DRX} > 320ms.	

9.5A.5 Measurement restriction for L1-RSRP measurement

The UE is required to be capable of measuring SSB for L1-RSRP without measurement gaps. The UE is required to perform the SSB measurements with measurement restrictions as described in the following clauses.

9.5A.5.1 Measurement restriction for SSB based L1-RSRP

When the SSB for L1-RSRP measurement is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for L1-RSRP measurement without any restriction;
- If SSB and CSI-RS have different SCS,
  - If UE supports simultaneousRxDataSSB-DiffNumerology, UE shall be able to measure the SSB for L1-RSRP measurement without any restriction;
  - If UE does not support simultaneousRxDataSSB-DiffNumerology, UE is required to measure SSB for L1-RSRP measurement.

9.5A.6 Scheduling availability of UE during L1-RSRP measurement

Scheduling availability restrictions when the UE is performing L1-RSRP measurement are described in the following clauses.

9.5A.6.1 Scheduling availability of UE performing L1-RSRP measurement with a same subcarrier spacing as PDSCH/PDCCH on FR1

There are no scheduling restrictions due to L1-RSRP measurement performed on SSB configured as RS for L1-RSRP measurement with the same SCS as PDSCH/PDCCH in FR1.

9.5A.6.2 Scheduling availability of UE performing L1-RSRP measurement with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UEs which support *simultaneousRxDataSSB-DiffNumerology* [14] there are no restrictions on scheduling availability due to L1-RSRP measurement based on SSB as RS for L1-RSRP measurement. For UEs which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to L1-RSRP measurement based on SSB configured for L1-RSRP measurement.

- The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on symbols corresponding to the SSB indexes configured for L1-RSRP measurement.

When intra-band carrier aggregation in FR1 is configured, the scheduling restrictions on serving cell where L1-RSRP measurement is performed apply to all serving cells in the same band on the symbols that fully or partially overlap with restricted symbols. When inter-band carrier aggregation within FR1 is configured, there are no scheduling restrictions on FR1 serving cell(s) configured in other bands than the bands in which the serving cell where L1-RSRP measurement is performed is configured.

9.5A.6.3 Scheduling availability of UE performing L1-RSRP measurement in case of FR1-FR2 inter-band CA

There are no scheduling restrictions on FR2 serving cell(s) due to L1-RSRP measurement performed on serving cell(s) under CCA.

9.5A.6.3 Scheduling availability of UE performing L1-RSRP measurement on FR2-2

The following scheduling restriction applies due to L1-RSRP measurement on an FR2-2 serving PCell and/or PSCell.

- The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on
  - symbols corresponding to the SSB indexes configured for L1-RSRP measurement, and/or
  - symbols corresponding to the periodic CSI-RS resource configured for L1-RSRP measurement, and/or

- symbols corresponding to the semi-perssitent CSI-RS resource configured for L1-RSRP measurement when the resource is activated, and/or

- symbols corresponding to the aperiodic CSI-RS resource configured for L1-RSRP measurement when the reporting is triggered.

When intra-band carrier aggregation in FR2-2 is performed, the scheduling restrictions on serving cell where L1-RSRP measurement is performed apply to all serving cells in the band on the symbols that fully or partially overlap with restricted symbols.

For FR2-2, if following conditions are met,

- UE has been notified about system information update through paging,

- The gap between UE's reception of PDCCH that UE monitors in the Type 2-PDCCH CSS set and that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots,

For the SSB and CORESET for RMSI scheduling multiplexing patterns 3, UE is expected to receive the PDCCH that UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured for L1-RSRP measurement; and

For the SSB and CORESET for RMSI scheduling multiplexing patterns 2, UE is expected to receive PDSCH that corresponds to the PDCCH that UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured for L1-RSRP measurement.

9.5A.6.4 Scheduling availability of UE performing L1-RSRP measurement on FR1 or FR2 in case of FR1-FR2 inter-band CA

There are no scheduling restrictions on FR1 serving cell(s) due to L1-RSRP measurement performed on FR2-2 serving cell(s) under CCA.

There are no scheduling restrictions on FR2 serving cell(s) due to L1-RSRP measurement performed on FR1 serving cell(s) under CCA.

9.5B L1-RSRP measurements for Reporting for RedCap

9.5B.1 Introduction

The applicability of the requirements for performing L1-RSRP measurements for reporting in subclause 9.5B is defined in Section 3.6.

When configured by the network, the UE shall be able to perform L1-RSRP measurements of configured CSI-RS, SSB or CSI-RS and SSB resources for L1-RSRP. The measurements shall be performed for PCell, on the resources configured for L1-RSRP measurements within the active BWP.

The UE shall be able to measure all CSI-RS resources and/or SSB resources of the *nzp-CSI-RS-ResourceSet* and/or *csi-SSB-ResourceSet* within the CSI-Resource*Config* settings configured for L1-RSRP for the active BWP, provided that the number of resources does not exceed the UE capability indicated by *beamManagementSSB-CSI-RS*.

The UE shall report the measurement quantity (*reportQuantity*) and send periodic, semi-persistent or aperiodic reports, according to the *reportConfigType* according to the CSI reporting configuration(s) (*CSI-ReportConfig*) for the active BWP.

9.5B.2 Requirements applicability

The requirements in clause 9.5B apply, provided:

- The CSI-RS or SSB or CSI-RS and SSB resources configured for L1-RSRP measurements are measurable.

An SSB resource configured for L1-RSRP shall be considered measurable when for each relevant SSB the following conditions are met:

For 1 Rx RedCap:

- L1-RSRP related side conditions given in clauses TBD for FR1, respectively, for a corresponding band,
- SSB_RP and SSB Ês/Iot according to Annex TBD for a corresponding band.

For 2 Rx RedCap:

- L1-RSRP related side conditions given in clauses 10.1.19.1 and 10.1.20.1 for FR1 and FR2, respectively, for a corresponding band,
- SSB_RP and SSB Ês/Iot according to Annex B.2.4.1 for a corresponding band.

A CSI-RS resource configured for L1-RSRP shall be considered measurable when for each relevant CSI-RS the following conditions are met:

For 1 Rx RedCap:

- L1-RSRP related side conditions given in clauses TBD for FR1, respectively, for a corresponding band,
- CSI-RS_RP and CSI-RS Ês/Iot according to Annex TBD for a corresponding band.

For 2 Rx RedCap:

- L1-RSRP related side conditions given in clauses 10.1.19.2 and 10.1.20.2 for FR1 and FR2, respectively, for a corresponding band,
- CSI-RS_RP and CSI-RS Ês/Iot according to Annex B.2.4.2 for a corresponding band.

A CSI-RS and SSB resource configured for L1-RSRP shall be considered measurable when the measurable resource conditions are met for both CSI-RS resource and SSB resource.

Requirements are defined for periodic, semi-persistent and aperiodic resources.

9.5B.3 Measurement Reporting Requirements

The UE shall send L1-RSRP reports only for report configurations configured for the active BWP.

The UE shall report the L1-RSRP value as a 7-bit value in the range [-140, -44] dBm with 1dB step size according to clause TBD for FR1, for 1 Rx RedCap, and 10.1.19 for FR1 and 10.1.20 for FR2 for 2 Rx RedCap, if *nrofReportedRS* is configured to one. If *nrofReportedRS* is configured to be larger than one, or if *groupBasedBeamReporting* is enabled, the UE shall use differential L1-RSRP based reporting as defined in clause TBD for FR1, for 1 Rx RedCap, and 10.1.19 for FR1 and 10.1.20 for FR2 for 2 Rx RedCap. The differential L1-RSRP is quantized to a 4-bit value with 2dB step size. The mapping between the reported L1-RSRP value and the measured quantity is described in TBD for 1 Rx RedCap, and 10.1.6 for 2 Rx RedCap.

9.5B.3.1 Periodic Reporting

For 1 Rx RedCap, reported L1-RSRP measurements contained in periodic L1-RSRP measurement reports shall meet the requirements in clause TBD for FR1.

For 2 Rx RedCap, reported L1-RSRP measurements contained in periodic L1-RSRP measurement reports shall meet the requirements in clauses 10.1.19 for FR1 and 10.1.20 for FR2, respectively.

The UE shall only send periodic L1-RSRP measurement reports for an active BWP.

The UE shall transmit the periodic L1-RSRP reporting on PUCCH over the air interface according to the periodicity defined in clause 5.2.1.4 in TS 38.214 [26].

9.5B.3.2 Semi-Persistent Reporting

For 1 Rx RedCap, reported L1-RSRP measurements contained in a Semi-Persistent L1-RSRP measurement report shall meet the requirements in clauses TBD for FR1. This requirement applies for semi-persistent L1-RSRP reports send on PUSCH or PUCCH.

For 2 Rx RedCap, reported L1-RSRP measurements contained in a Semi-Persistent L1-RSRP measurement report shall meet the requirements in clauses 10.1.19 for FR1 and 10.1.20 for FR2, respectively. This requirement applies for semi-persistent L1-RSRP reports send on PUSCH or PUCCH.

The UE shall only send semi-persistent L1-RSRP measurement reports on PUSCH, if a DCI request has been received.

The UE shall only send semi-persistent L1-RSRP measurement reports on PUCCH, if an activation command [7] has been received.

The UE shall transmit the semi-persistent L1-RSRP reporting on PUSCH or PUCCH over the air interface according to the periodicity defined in clause 5.2.1.4 in TS 38.214 [26].

9.5B.3.3 Aperiodic Reporting

For 1 Rx RedCap, reported L1-RSRP measurements contained in aperiodic triggered, aperiodic triggered periodic and aperiodic triggered semi-persistent L1-RSRP reports shall meet the requirements in clause TBD.

For 2 Rx Redcap, reported L1-RSRP measurements contained in aperiodic triggered, aperiodic triggered periodic and aperiodic triggered semi-persistent L1-RSRP reports shall meet the requirements in clauses 10.1.19 for FR1 and 10.1.20 for FR2, respectively.

The UE shall only send aperiodic L1-RSRP measurement reports, if a DCI trigger has been received.

After the UE receives CSI request in DCI, the UE shall transmit the aperiodic L1-RSRP reporting on PUSCH over the air interface at the time specified according to clause 6.1.2.1 in TS 38.214 [26].

9.5B.4 L1-RSRP measurement requirements

9.5B.4.1 SSB based L1-RSRP Reporting

The UE shall be capable of performing L1-RSRP measurements based on the configured SSB resource for L1-RSRP computation, and the UE physical layer shall be capable of reporting L1-RSRP measured over the measurement period of $T_{L1\text{-}RSRP_Measurement_Period_SSB_RedCap}$.

The value of $T_{L1\text{-}RSRP_Measurement_Period_SSB}$ is defined in Table 9.5B.4.1-1 for FR1 and Table 9.5B.4.1-2 for FR2, for 2 Rx RedCap, and Table 9.5B.4.1-3 for FR1 for 1 Rx RedCap, where

- M=1 if higher layer parameter *timeRestrictionForChannelMeasurement* is configured, and M=3 otherwise.
- N= 8.

For FR1,

- $P=\frac{1}{1-\frac{T_{SSB}}{MRGP}}$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the SSB; and
- P=1 when in the monitored cell there are no measurement gaps overlapping with any occasion of the SSB.

For FR2,

- $P=\frac{1}{1-\frac{T_{SSB}}{T_{SMTCperiod}}}$, when SSB is not overlapped with measurement gap and SSB is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$).
- P is $P_{sharing\ factor}$, when SSB is not overlapped with measurement gap and SSB is fully overlapped with SMTC period ($T_{SSB} = T_{SMTCperiod}$).

- $P=\frac{1}{1-\frac{T_{SSB}}{MGRP}-\frac{T_{SSB}}{T_{SMTCperiod}}}$, when SSB is partially overlapped with measurement gap and SSB is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and
  - $T_{SMTCperiod} \neq MGRP$ or
  - $T_{SMTCperiod} = MGRP$ and $T_{SSB} < 0.5*T_{SMTCperiod}$
- P is $\frac{P_{sharing\ factor}}{1-\frac{T_{SSB}}{MGRP}}$, when SSB is partially overlapped with measurement gap and SSB is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and $T_{SMTCperiod} = MGRP$ and $T_{SSB} = 0.5*T_{SMTCperiod}$
- $P=\frac{1}{1-\frac{T_{SSB}}{T_{SMTCperiod}}}$, when S SSB is partially overlapped with measurement gap (T_{SSB} <MGRP) and SSB is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with measurement gap.
- P is $\frac{P_{sharing\ factor}}{1-\frac{T_{SSB}}{MRGP}}$, when SSB is partially overlapped with measurement gap and SSB is fully overlapped with SMTC occasion ($T_{SSB} = T_{SMTCperiod}$) and SMTC occasion is partially overlapped with measurement gap ($T_{SMTCperiod} < MGRP$)
- $P_{sharing\ factor} = 1$, if the SSB configured for L1-RSRP measurement outside measurement gap is
  - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and,
  - not overlapped with the RSSI symbols indicated by *ss-RSSI-Measurement* and 1data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured,
- $P_{sharing\ factor} = 3$, otherwise.

Where:

- T_{SSB} = ssb-periodicityServingCell
- $T_{SMTCperiod}$ = the configured SMTC period

If the high layer in TS 38.331 [2] signaling of *smtc2* is configured, $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc2*; Otherwise $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc1*.

Longer evaluation period would be expected if the combination of SSB, SMTC occasion and measurement gap configurations does not meet pervious conditions.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer L1 RSRP measurement period would be expected during the period $T_{identify_CGI,E\text{-}UTRAN}$ when the UE is requested to decode an LTE CGI.

Table 9.5B.4.1-1: Measurement period $T_{L1\text{-}RSRP_Measurement_Period_SSB_RedCap}$ (FR1) for 2 Rx RedCap

Configuration	$T_{L1\text{-}RSRP_Measurement_Period_SSB_RedCap}$ (ms)
non-DRX	$\max(T_{Report}, \text{ceil}(M*P)*T_{SSB})$
DRX cycle ≤ 320ms	$\max(T_{Report}, \text{ceil}(1.5*M*P)*\max(T_{DRX},T_{SSB}))$
DRX cycle > 320ms	$\text{ceil}(M*P)*T_{DRX}$
Note: T_{SSB} = ssb-periodicityServingCell is the periodicity of the SSB-Index configured for L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting.	

Table 9.5B.4.1-2: Measurement period $T_{L1\text{-}RSRP_Measurement_Period_SSB_RedCap}$ (FR2) for 2 Rx RedCap

Configuration	$T_{L1\text{-}RSRP_Measurement_Period_SSB_RedCap}$ (ms)
non-DRX	max(T_{Report}, ceil(M*P*N)*T_{SSB})
DRX cycle ≤ 320ms	max(T_{Report}, ceil(1.5*M*P*N)*max(T_{DRX},T_{SSB}))
DRX cycle > 320ms	ceil(1.5*M*P*N)*T_{DRX}
Note: T_{SSB} = ssb-periodicityServingCell is the periodicity of the SSB-Index configured for L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting.	

Table 9.5B.4.1-3: Measurement period $T_{L1\text{-}RSRP_Measurement_Period_SSB_RedCap}$ (FR1) for 1 Rx RedCap

Configuration	$T_{L1\text{-}RSRP_Measurement_Period_SSB_RedCap}$ (ms)
non-DRX	max(T_{Report}, ceil(M*P)*T_{SSB})
DRX cycle ≤ 320ms	max(T_{Report}, ceil(1.5*M*P)*max(T_{DRX},T_{SSB}))
DRX cycle > 320ms	ceil(M*P)*T_{DRX}
Note: T_{SSB} = ssb-periodicityServingCell is the periodicity of the SSB-Index configured for L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting.	

9.5B.4.2 CSI-RS based L1-RSRP Reporting

The UE shall be capable of performing L1-RSRP measurements based on the configured CSI-RS resource for L1-RSRP computation, and the UE physical layer shall be capable of reporting L1-RSRP measured over the measurement period of $T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS_RedCap}$.

The value of $T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS_RedCap}$ is defined in Table 9.5B.4.2-1 for FR1 and in Table 9.5B.4.2-2 for FR2, for 2 Rx RedCap, and in Table 9.5B.4.2-3 for 1 Rx RedCap, where

- For periodic and semi-persistent CSI-RS resources, M=1 if higher layer parameter *timeRestrictionForChannelMeasurement* is configured, and M=3 otherwise
- For aperiodic CSI-RS resources M=1
- For periodic CSI-RS resources in a resource set configured with higher layer parameter *repetition* set to OFF, N=1. The requirements apply if *qcl-InfoPeriodicCSI-RS* is configured for all the resources in the resource set and for each resource one RS has QCL-TypeD with
  - SSB for L1-RSRP measurement, or
  - another CSI-RS in resource set configured with repetition ON.
- For periodic CSI-RS resources in a resource set configured with higher layer parameter *repetition* set to ON, N=ceil(*maxNumberRxBeam* / $N_{res_per_set}$), where $N_{res_per_set}$ is number of resources in the resource set. The requirements apply provided *qcl-InfoPeriodicCSI-RS* is configured with QCL-TypeD for all resources in the resource set.
- For semi-persistent CSI-RS resources in a resource set configured with higher layer parameter *repetition* set to OFF, N=1. The requirements apply provided TCI state is provided for all resources in the resource set in the MAC CE activating the resource set and for each resource one RS has QCL-TypeD with
  - SSB for L1-RSRP measurement, or
  - another CSI-RS in resource set configured with repetition ON.
- For semi-persistent CSI-RS resources in a resource set configured with higher layer parameter *repetition* set to ON, N=ceil(*maxNumberRxBeam* / $N_{res_per_set}$), where $N_{res_per_set}$ is number of resources in the resource set. The requirements apply provided TCI state is provided with QCL-TypeD for all resources in the resource set in the MAC CE activating the resource set.
- For aperiodic CSI-RS resources in a resource set configured with higher layer parameter *repetition* set to OFF, N=1. The requirements apply provided *qcl-info* is configured for all resources in the resource set and for each resource one RS has QCL-TypeD with

- SSB for L1-RSRP measurement, or
- another CSI-RS in resource set configured with repetition ON.

- For aperiodic CSI-RS resources in a resource set configured with higher layer parameter *repetition* set to ON, N=1. UE is not required to meet the accuracy requirements in clause 10.1.19.2 and 10.1.20.2 if number of resources in the resource set is smaller than *maxNumberRxBeam*. The requirements apply provided *qcl-info* is configured with QCL-TypeD for all resources in the resource set.

For FR1,

- $P=\frac{1}{1-\frac{T_{CSI-RS}}{MGRP}}$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the CSI-RS; and
- P=1 when in the monitored cell there are no measurement gaps overlapping with any occasion of the CSI-RS.

For FR2,

- P=1, when CSI-RS is not overlapped with measurement gap and also not overlapped with SMTC occasion.
- $P=\frac{1}{1-\frac{T_{CSI-RS}}{MGRP}}$, when CSI-RS is partially overlapped with measurement gap and CSI-RS is not overlapped with SMTC occasion ($T_{CSI-RS} < MGRP$)
- $P=\frac{1}{1-\frac{T_{CSI-RS}}{T_{SMTCperiod}}}$, when CSI-RS is not overlapped with measurement gap and CSI-RS is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$).
- $P=P_{sharing\ factor}$, when CSI-RS is not overlapped with measurement gap and CSI-RS is fully overlapped with SMTC occasion ($T_{CSI-RS} = T_{SMTCperiod}$).
- P=1, when aperiodic CSI-RS resource is not overlapped with measurement gap
- $P=\frac{1}{1-\frac{T_{CSI-RS}}{MGRP}-\frac{T_{CSI-RS}}{T_{SMTCperiod}}}$, when CSI-RS is partially overlapped with measurement gap and CSI-RS is partially overlapped with SMTC occasion (TCSI-RS < $T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and
  - $T_{SMTCperiod} \neq MGRP$ or
  - $T_{SMTCperiod} = MGRP$ and $T_{CSI-RS} < 0.5*T_{SMTCperiod}$
- $P=\frac{3}{1-\frac{T_{CSI-RS}}{MGRP}}$, when CSI-RS is partially overlapped with measurement gap and CSI-RS is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and $T_{SMTCperiod} = MGRP$ and $T_{CSI-RS} = 0.5*T_{SMTCperiod}$
- $P=\frac{1}{1-\frac{T_{CSI-RS}}{T_{SMTCperiod}}}$, when CSI-RS is partially overlapped with measurement gap ($T_{CSI-RS} < MGRP$) and CSI-RS is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with measurement gap.
- $P=\frac{P_{sharing\ factor}}{1-\frac{T_{CSI-RS}}{MGRP}}$, when CSI-RS is partially overlapped with measurement gap and CSI-RS is fully overlapped with SMTC occasion ($T_{CSI-RS} = T_{SMTCperiod}$) and SMTC occasion is partially overlapped with measurement gap ($T_{SMTCperiod} < MGRP$)
- $P_{sharing\ factor}$ = 1, if the CSI-RS configured for L1-RSRP measurement outside measurement gap is
  - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure*

is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and,

- not overlapped with the RSSI symbols indicated by *ss-RSSI-Measurement* and 1data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured

- $P_{sharing\ factor} = 3$, otherwise.

Where:

$T_{SMTCperiod}$ = the configured SMTC period.

T_{CSI-RS} = the periodicity of CSI-RS configured for L1-RSRP measurement

If the high layer in TS 38.331 [2] signaling of *smtc2* is configured, $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc2*; Otherwise $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc1*. $T_{SMTCperiod}$ is the shortest SMTC period among all CCs in the same FR2 band, provided the SMTC offset of all CCs in FR2 have the same offset.

Note: The overlap between CSI-RS for L1-RSRP measurement and SMTC means that CSI-RS for L1-RSRP measurement is within the SMTC window duration.

Longer evaluation period would be expected if the combination of CSI-RS, SMTC occasion and measurement gap configurations does not meet pervious conditions.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer L1 RSRP measurement period would be expected during the period $T_{identify_CGI,E\text{-}UTRAN}$ when the UE is requested to decode an LTE CGI.

Table 9.5B.4.2-1: Measurement period $T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS_RedCap}$ (FR1) for 2 Rx RedCap

Configuration	$T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS_RedCap}$ (ms)
non-DRX	$\max(T_{Report}, \text{ceil}(M*P)*T_{CSI\text{-}RS})$
DRX cycle ≤ 320ms	$\max(T_{Report}, \text{ceil}(1.5*M*P)*\max(T_{DRX},T_{CSI\text{-}RS}))$
DRX cycle > 320ms	$\text{ceil}(M*P)*T_{DRX}$
Note 1: $T_{CSI\text{-}RS}$ is the periodicity of CSI-RS configured for L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting. Note 2: the requirements are applicable provided that the CSI-RS resource configured for L1-RSRP measurement is transmitted with Density = 3.	

Table 9.5B.4.2-2: Measurement period $T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS_RedCap}$ (FR2) for 2 Rx RedCap

Configuration	$T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS_RedCap}$ (ms)
non-DRX	$\max(T_{Report}, \text{ceil}(M*P*N)*T_{CSI\text{-}RS})$
DRX cycle ≤ 320ms	$\max(T_{Report}, \text{ceil}(1.5*M*P*N)*\max(T_{DRX},T_{CSI\text{-}RS}))$
DRX cycle > 320ms	$\text{ceil}(M*P*N)*T_{DRX}$
Note 1: $T_{CSI\text{-}RS}$ is the periodicity of CSI-RS configured for L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting. Note 2: the requirements are applicable provided that the CSI-RS resource configured for L1-RSRP measurement is transmitted with Density = 3.	

Table 9.5B.4.2-3: Measurement period $T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS_RedCap}$ (FR1) for 1 Rx RedCap

Configuration	$T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS_RedCap}$ (ms)
non-DRX	$\max(T_{Report}, \text{ceil}(M*P)*T_{CSI\text{-}RS})$
DRX cycle ≤ 320ms	$\max(T_{Report}, \text{ceil}(1.5*M*P)*\max(T_{DRX},T_{CSI\text{-}RS}))$
DRX cycle > 320ms	$\text{ceil}(M*P)*T_{DRX}$

Note 1:	T_{CSI-RS} is the periodicity of CSI-RS configured for L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting.
Note 2:	the requirements are applicable provided that the CSI-RS resource configured for L1-RSRP measurement is transmitted with Density = 3.

9.5B.5 Measurement restriction for CSI-RS and SSB for L1-RSRP measurement

The UE is required to be capable of measuring SSB and CSI-RS for L1-RSRP without measurement gaps. The UE is required to perform the SSB and CSI-RS measurements with measurement restrictions as described in the following clauses.

9.5B.5.1 Measurement restriction for SSB based L1-RSRP

For FR1, when the SSB for L1-RSRP measurement is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for L1-RSRP measurement without any restriction;
- If SSB and CSI-RS have different SCS,
  - If UE supports simultaneousRxDataSSB-DiffNumerology, UE shall be able to measure the SSB for L1-RSRP measurement without any restriction;
  - If UE does not support simultaneousRxDataSSB-DiffNumerology, UE is required to measure one of but not both SSB for L1-RSRP measurement and CSI-RS. Longer measurement period for SSB based L1-RSRP measurement is expected, and no requirements are defined.

For FR2, when the SSB for L1-RSRP measurement on one CC is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC, UE is required to measure one of but not both SSB for L1-RSRP measurement and CSI-RS. Longer measurement period for SSB based L1-RSRP measurement is expected, and no requirements are defined.

9.5B.5.2 Measurement restriction for CSI-RS based L1-RSRP

For both FR1 and FR2, when the CSI-RS for L1-RSRP measurement is in the same OFDM symbol as SSB for RLM, BFD, CBD or L1-RSRP measurement, UE is not required to receive CSI-RS for L1-RSRP measurement in the PRBs that overlap with an SSB.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has same SCS than CSI-RS for L1-RSRP measurement, the UE shall be able to perform CSI-RS measurement without restrictions.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has different SCS than CSI-RS for L1-RSRP measurement, the UE shall be able to perform CSI-RS measurement with restrictions according to its capabilities:

- If the UE supports *simultaneousRxDataSSB-DiffNumerology* the UE shall be able to perform CSI-RS measurement without restrictions.
- If the UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both CSI-RS for L1-RSRP measurement and SSB. Longer measurement period for CSI-RS based L1-RSRP measurement is expected, and no requirements are defined.

For FR1, when the CSI-RS for L1-RSRP measurement is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement, UE shall be able to measure the CSI-RS for L1-RSRP measurement without any restriction.

9.5B.6 Scheduling availability of UE during L1-RSRP measurement

Scheduling availability restrictions when the UE is performing L1-RSRP measurement are described in the following clauses.

9.5B.6.1 Scheduling availability of UE performing L1-RSRP measurement with a same subcarrier spacing as PDSCH/PDCCH on FR1

For FD-FDD and TDD RedCap UEs, there are no scheduling restrictions due to L1-RSRP measurement performed on SSB and CSI-RS configured as RS for L1-RSRP measurement with the same SCS as PDSCH/PDCCH in FR1.

For HD-FDD RedCap UE, scheduling restrictions apply for transmission on PUCCH/PUSCH/SRS during the CBD evaluation period, as CBD evaluation is prioritized over UL transmission. The CBD evaluation period equals the measurement period of $T_{L1\text{-}RSRP_Measurement_Period_SSB_RedCap}$ in case L1-RSRP measurement is performed on SSB as defined in clause 9.5B.4.1, or $T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS_RedCap}$ in case L1-RSRP measurement is performed on CSI-RS and/or SSB as defined in clause 9.5B.4.1.

9.5B.6.2 Scheduling availability of UE performing L1-RSRP measurement with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UEs which support *simultaneousRxDataSSB-DiffNumerology* [14] there are no restrictions on scheduling availability due to L1-RSRP measurement based on SSB as RS for L1-RSRP measurement. For UEs which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to L1-RSRP measurement based on SSB configured for L1-RSRP measurement.

- For FD-FDD and TDD RedCap UEs, the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on symbols corresponding to the SSB indexes configured for L1-RSRP measurement.
- For HD-FDD RedCap UE, scheduling restrictions apply for transmission on PUCCH/PUSCH/SRS during the CBD evaluation period, as CBD evaluation is prioritized over UL transmission. The CBD evaluation period equals the measurement period of $T_{L1\text{-}RSRP_Measurement_Period_SSB_RedCap}$ in case L1-RSRP measurement is performed on SSB as defined in clause 9.5B.4.1, or $T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS_RedCap}$ in case L1-RSRP measurement is performed on CSI-RS and/or SSB as defined in clause 9.5B.4.1.

9.5B.6.3 Scheduling availability of UE performing L1-RSRP measurement on FR2

The following scheduling restriction applies due to L1-RSRP measurement.

- For the case where RS for L1-RSRP measurement is CSI-RS which is QCLed with active TCI state for PDCCH/PDSCH and not in a CSI-RS resource set with repetition ON, and N=1 applies as specified in clause 9.5B.4.2
  - There are no scheduling restrictions due to L1-RSRP measurement performed based on the CSI-RS.
- Otherwise
  - The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on
    - symbols corresponding to the SSB indexes configured for L1-RSRP measurement, and/or
    - symbols corresponding to the periodic CSI-RS resource configured for L1-RSRP measurement, and/or
    - symbols corresponding to the semi-perssitent CSI-RS resource configured for L1-RSRP measurement when the resource is activated, and/or
    - symbols corresponding to the aperiodic CSI-RS resource configured for L1-RSRP measurement when the reporting is triggered.

If following conditions are met,

- UE has been notified about system information update through paging,
- The gap between UE's reception of PDCCH that UE monitors in the Type 2-PDCCH CSS set and that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots,

For the SSB and CORESET for RMSI scheduling multiplexing patterns 3, UE is expected to receive the PDCCH that UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured for L1-RSRP measurement; and

For the SSB and CORESET for RMSI scheduling multiplexing patterns 2, UE is expected to receive PDSCH that corresponds to the PDCCH that UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured for L1-RSRP measurement.

9.5C L1-RSRP measurements for Reporting for satellite access

9.5C.1 Introduction

When configured by the network, the UE shall be able to perform L1-RSRP measurements of configured CSI-RS, SSB or CSI-RS and SSB resources for L1-RSRP. The measurements shall be performed for PCell on the resources configured for L1-RSRP measurements within the active BWP.

The UE shall be able to measure all CSI-RS resources and/or SSB resources of the *nzp-CSI-RS-ResourceSet* and/or *csi-SSB-ResourceSet* within the CSI-Resource*Config* settings configured for L1-RSRP for the active BWP, provided that the number of resources does not exceed the UE capability indicated by *beamManagementSSB-CSI-RS*.

The UE shall report the measurement quantity (*reportQuantity*) and send periodic, semi-persistent or aperiodic reports, according to the *reportConfigType* according to the CSI reporting configuration(s) (*CSI-ReportConfig*) for the active BWP.

9.5C.2 Requirements applicability

The requirements in clause 9.5C apply, provided:

- The CSI-RS or SSB or CSI-RS and SSB resources configured for L1-RSRP measurements are measurable.

An SSB resource configured for L1-RSRP shall be considered measurable when for each relevant SSB the following conditions are met:

- L1-RSRP related side conditions given in clauses 10.1.19.1 for FR1, for a corresponding band,
- SSB_RP and SSB Ês/Iot according to Annex B.2.4.1 for a corresponding band.

A CSI-RS resource configured for L1-RSRP shall be considered measurable when for each relevant CSI-RS the following conditions are met:

- L1-RSRP related side conditions given in clauses 10.1.19.2 for FR1, respectively, for a corresponding band,
- CSI-RS_RP and CSI-RS Ês/Iot according to Annex B.2.4.2 for a corresponding band.

A CSI-RS and SSB resource configured for L1-RSRP shall be considered measurable when the measurable resource conditions are met for both CSI-RS resource and SSB resource.

Requirements are defined for periodic, semi-persistent and aperiodic resources.

9.5C.3 Measurement Reporting Requirements

The UE shall send L1-RSRP reports only for report configurations configured for the active BWP.

The UE shall report the L1-RSRP value as a 7-bit value in the range [-140, -44] dBm with 1dB step size according to clause 10.1.19 for FR1 if *nrofReportedRS* is configured to one. If *nrofReportedRS* is configured to be larger than one, or if *groupBasedBeamReporting* is enabled, the UE shall use differential L1-RSRP based reporting as defined in clause 10.1.19 for FR1. The differential L1-RSRP is quantized to a 4-bit value with 2dB step size. The mapping between the reported L1-RSRP value and the measured quantity is described in 10.1.6.

9.5C.3.1 Periodic Reporting

Reported L1-RSRP measurements contained in periodic L1-RSRP measurement reports shall meet the requirements in clauses [FFS].

The UE shall only send periodic L1-RSRP measurement reports for an active BWP.

The UE shall transmit the periodic L1-RSRP reporting on PUCCH over the air interface according to the periodicity defined in clause 5.2.1.4 in TS 38.214 [26].

9.5C.3.2 Semi-Persistent Reporting

Reported L1-RSRP measurements contained in a Semi-Persistent L1-RSRP measurement report shall meet the requirements in clauses [FFS]. This requirement applies for semi-persistent L1-RSRP reports send on PUSCH or PUCCH.

The UE shall only send semi-persistent L1-RSRP measurement reports on PUSCH, if a DCI request has been received.

The UE shall only send semi-persistent L1-RSRP measurement reports on PUCCH, if an activation command [7] has been received.

The UE shall transmit the semi-persistent L1-RSRP reporting on PUSCH or PUCCH over the air interface according to the periodicity defined in clause 5.2.1.4 in TS 38.214 [26].

9.5C.3.3 Aperiodic Reporting

Reported L1-RSRP measurements contained in aperiodic triggered, aperiodic triggered periodic and aperiodic triggered semi-persistent L1-RSRP reports shall meet the requirements in clauses [FFS].

The UE shall only send aperiodic L1-RSRP measurement reports, if a DCI trigger has been received.

After the UE receives CSI request in DCI, the UE shall transmit the aperiodic L1-RSRP reporting on PUSCH over the air interface at the time specified according to clause 6.1.2.1 in TS 38.214 [26].

9.5C.4 L1-RSRP measurement requirements

9.5C.4.1 SSB based L1-RSRP Reporting

The UE shall be capable of performing L1-RSRP measurements based on the configured SSB resource for L1-RSRP computation, and the UE physical layer shall be capable of reporting L1-RSRP measured over the measurement period of $T_{L1\text{-}RSRP_Measurement_Period_SSB_SAN}$.

The value of $T_{L1\text{-}RSRP_Measurement_Period_SSB_SAN}$ is defined in Table 9.5C.4.1-1 for FR1, where

- M=1 if higher layer parameter *timeRestrictionForChannelMeasurement* is configured, and M=3 otherwise
- P value for SSB resource to be measured is defined as
  - $P_{sharing\ factor} * N_{total} / N_{outside_MG}$ with $N_{available} = 0$
  - $N_{total} / N_{available}$ with $N_{available} > 0$
- For a window W of duration max($T_{L1,}$ MGRP_max), where MGRP max is the maximum MGRP across all configured per-UE measurement gaps, and starting at the beginning of any SSB resource occasion:

- N_{total} is the total number of SSB resource occasions within the window, including those overlapped with measurement gap occasions or SMTC occasions within the window, and
- $N_{outside_MG}$ is the number of SSB resource occasions that are not overlapped with any measurement gap occasion within the window W
- $N_{available}$ is
  - the number of SSB resource occasions that are not overlapped with any measurement gap occasion nor any SMTC occasion within the window W, if UE does not support *parallelMeasurementWithoutRestriction* and LEO satellites are measured for intra-frequency measurement, and
  - same as $N_{outside_MG}$, otherwise
- T_{L1} is periodicity of the target SSB.
- $P_{sharing\ factor} = 3$.

Longer evaluation period would be expected if the combination of SSB, SMTC occasion and measurement gap configurations does not meet pervious conditions.

Table 9.5C.4.1-1: Measurement period $T_{L1\text{-}RSRP_Measurement_Period_SSB_SAN}$ for FR1

Configuration	$T_{L1\text{-}RSRP_Measurement_Period_SSB_SAN}$ (ms)
non-DRX	$\max(T_{Report}, \text{ceil}(M*P)*T_{SSB})$
DRX cycle ≤ 320ms	$\max(T_{Report}, \text{ceil}(1.5*M*P)*\max(T_{DRX},T_{SSB}))$
DRX cycle > 320ms	$\text{ceil}(M*P)*T_{DRX}$
Note: T_{SSB} = ssb-periodicityServingCell is the periodicity of the SSB-Index configured for L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting.	

9.5C.4.2 CSI-RS based L1-RSRP Reporting

The UE shall be capable of performing L1-RSRP measurements based on the configured CSI-RS resource for L1-RSRP computation, and the UE physical layer shall be capable of reporting L1-RSRP measured over the measurement period of $T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS_SAN}$.

The value of $T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS}$ is defined in Table 9.5C.4.2-1 for FR1, where

- For periodic and semi-persistent CSI-RS resources, M=1 if higher layer parameter *timeRestrictionForChannelMeasurement* is configured, and M=3 otherwise
- For aperiodic CSI-RS resources M=1
- P value for a CSI-RS resource to be measured is defined as
  - $P_{sharing\ factor} * N_{total} / N_{outside_MG}$ with $N_{available} = 0$
  - $N_{total} / N_{available}$ with $N_{available} > 0$
- For a window W of duration $\max(T_{L1}, MGRP_max)$, where MGRP max is the maximum MGRP across all configured per-UE measurement gaps, and starting at the beginning of any CSI-RS resource occasion:
  - N_{total} is the total number of CSI-RS resource occasions within the window, including those overlapped with measurement gap occasions or SMTC occasions within the window, and
  - $N_{outside_MG}$ is the number of CSI-RS resource occasions that are not overlapped with any measurement gap occasion within the window W
  - $N_{available}$ is
    - the number of SSB resource occasions that are not overlapped with any measurement gap occasion nor any SMTC occasion within the window W, if UE does not support

parallelMeasurementWithoutRestriction and LEO satellites are measured for intra-frequency measurement, and

- same as $N_{outside_MG}$, otherwise

- T_{L1} is periodicity of the target CSI-RS.

- $P_{sharing\ factor} = 3$.

Note: The overlap between CSI-RS for L1-RSRP measurement and SMTC means that CSI-RS for L1-RSRP measurement is within the SMTC window duration.

Longer evaluation period would be expected if the combination of CSI-RS, SMTC occasion and measurement gap configurations does not meet pervious conditions.

Table 9.5C.4.2-1: Measurement period $T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS_SAN}$ for FR1

Configuration	$T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS_SAN}$ (ms)
non-DRX	$\max(T_{Report}, ceil(M*P)*T_{CSI\text{-}RS})$
DRX cycle ≤ 320ms	$\max(T_{Report}, ceil(1.5*M*P)*\max(T_{DRX},T_{CSI\text{-}RS}))$
DRX cycle > 320ms	$ceil(M*P)*T_{DRX}$
Note 1: $T_{CSI\text{-}RS}$ is the periodicity of CSI-RS configured for L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting. Note 2: the requirements are applicable provided that the CSI-RS resource configured for L1-RSRP measurement is transmitted with Density = 3.	

9.5C.5 Measurement restriction for L1-RSRP measurement

The UE is required to be capable of measuring SSB and CSI-RS for L1-RSRP without measurement gaps. The UE is required to perform the SSB and CSI-RS measurements with measurement restrictions as described in the following clauses.

9.5C.5.1 Measurement restriction for SSB based L1-RSRP

L1-RSRP measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for L1-RSRP measurement without any restriction;

- If SSB and CSI-RS have different SCS,

  - If UE supports simultaneousRxDataSSB-DiffNumerology, UE shall be able to measure the SSB for L1-RSRP measurement without any restriction;

  - If UE does not support simultaneousRxDataSSB-DiffNumerology, UE is required to measure one of but not both SSB for L1-RSRP measurement and CSI-RS. Longer measurement period for SSB based L1-RSRP measurement is expected, and no requirements are defined.

9.5C.5.2 Measurement restriction for CSI-RS based L1-RSRP

For FR1, when the CSI-RS for L1-RSRP measurement is in the same OFDM symbol as SSB for RLM, BFD, CBD or L1-RSRP measurement, UE is not required to receive CSI-RS for L1-RSRP measurement in the PRBs that overlap with an SSB.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has same SCS than CSI-RS for L1-RSRP measurement, the UE shall be able to perform CSI-RS measurement without restrictions.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has different SCS than CSI-RS for L1-RSRP measurement, the UE shall be able to perform CSI-RS measurement with restrictions according to its capabilities:

- If the UE supports *simultaneousRxDataSSB-DiffNumerology* the UE shall be able to perform CSI-RS measurement without restrictions.

- If the UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both CSI-RS for L1-RSRP measurement and SSB. Longer measurement period for CSI-RS based L1-RSRP measurement is expected, and no requirements are defined.

For FR1, when the CSI-RS for L1-RSRP measurement is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement, UE shall be able to measure the CSI-RS for L1-RSRP measurement without any restriction.

9.5C.6 Scheduling availability of UE during L1-RSRP measurement

Scheduling availability restrictions when the UE is performing L1-RSRP measurement are described in the following clauses.

9.5C.6.1 Scheduling availability of UE performing L1-RSRP measurement with a same subcarrier spacing as PDSCH/PDCCH on FR1

There are no scheduling restrictions due to L1-RSRP measurement performed on SSB and CSI-RS configured as RS for L1-RSRP measurement with the same SCS as PDSCH/PDCCH in FR1.

9.5C.6.2 Scheduling availability of UE performing L1-RSRP measurement with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UEs which support *simultaneousRxDataSSB-DiffNumerology* [14] there are no restrictions on scheduling availability due to L1-RSRP measurement based on SSB as RS for L1-RSRP measurement. For UEs which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to L1-RSRP measurement based on SSB configured for L1-RSRP measurement.

- The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on symbols corresponding to the SSB indexes configured for L1-RSRP measurement.

9.6 NE-DC: Measurements

9.6.1 Introduction

This clause contains requirements for UE supporting dual connectivity with NR PCell and E-UTRA FDD or TDD PSCell. The requirements apply to UEs that have been configured with NE-DC.

9.6.2 SFTD Measurements

9.6.2.1 Introduction

This clause contains requirements on UE capabilities for reporting of SFN and frame time difference between NR PCell and E-UTRA PSCell in RRC_CONNECTED state. The requirements comprise measurement reporting delay and measurement accuracy. The overall measurement reporting delay includes a RRC procedure delay specified in TS 38.331 [2], and the SFTD measurement reporting delay specified below.

9.6.2.2 SFTD Measurement requirements

When no DRX is used in either of the NR PCell and E-UTRA PSCell, the physical layer measurement period of the SFTD measurement shall be $T_{measure_SFTD1}$ = max(0.2, 5 * SMTC period) s.

When DRX is used in either of the NR PCell or the E-UTRA PSCell, or in both PCell and PSCell, the physical layer measurement period ($T_{measure_SFTD1}$) of the SFTD measurement shall be as specified in Table 9.6.2.2-1.

Table 9.6.2.2-1: SFTD measurement requirement when DRX is used

DRX cycle length (s)[Note2]	$T_{measure_SFTD1}$ (s)
DRX cycle≤0.04	max(0.2,5 x SMTC period) (Note1)
0.04<DRX cycle≤0.32	8 x max(DRX cycle, SMTC period)
0.32<DRX cycle≤10.24	5 x DRX cycle
Note1: Number of DRX cycles depends upon the DRX cycle in use Note2: DRX cycle length in this table refers to the DRX cycle length configured for PCell or PSCell. When DRX is used in both PCell and PSCell, DRX cycle length in this table refers to the longer of the DRX cycle lengths for PCell and PSCell.	

If PSCell is changed without changing carrier frequency of PSCell while the UE is performing SFTD measurements, the UE shall still meet SFTD measurement and accuracy requirements for the new PSCell. In this case the UE shall restart the SFTD measurement, and the total physical layer measurement period shall not exceed $T_{measure_SFTD2}$ as defined by the following expression:

$$T_{measure_SFTD2} = (M+1)*(T_{measure_SFTD1}) + M*T_{PSCell_change_NEDC}$$

where:

M is the number of times the E-UTRA PSCell is changed over the measurement period ($T_{measure_SFTD2}$), and

$T_{PSCell_change_NEDC}$ is the time necessary to change the PSCell; it can be up to 25 ms.

If PCell is changed, or if PSCell is changed to a different carrier frequency, the UE shall terminate the SFTD measurement.

The measurement accuracy for the SFTD measurement when DRX is used as well as when no DRX is used shall be as specified in clause 10.1.21.1.

9.7 Cross Link Interference measurements

9.7.1 Introduction

The UE capable of performing CLI measurements shall be able to measure SRS-RSRP and CLI-RSSI which are defined in TS38.215 [4] within active DL BWP. The measurements requirements in this clause apply for TDD mode only.

CLI measurements are only applicable for RRC_CONNECTED intra-frequency:

- when SRS-RSRP measurement resource is fully confined within BW of DL active BWP
- when CLI-RSSI measurement resouce is configured within active BWP

When the UE measures SRS-RSRP and CLI-RSSI, a constant offset relative to the downlink reference timing in the serving cell shall be applied. The constant offset value is derived by UE implementation and shall be at least $Tc*N_{TA_offset}$.

For performing CLI measurement in FR2, UE can assume the configured CLI measurement resources are QCL-ed with TypeD to one of the latest received PDSCH and the latest monitored CORESET.

CLI measurement requirements defined in clause 9.7 are applicable if

- CLI measurement is not performed on an NR carrier in the same band as E-UTRA serving carrier; and
- UE supports simultaneous Rx/Tx for inter-band CA, inter-band EN-DC, inter-band NE-DC, and NR-DC.

9.7.2 SRS-RSRP measurements

9.7.2.1 Introduction

When configured by the network, the UE shall be able to perform SRS-RSRP measurements of configured *srs-ResourceConfigCLI*. The requirements apply when the subcarrier spacing for SRS-RSRP measurement resource configuration is the same as the subcarrier spacing of the active DL BWP of serving cell. The UE is not required to measure SRS using different SCS compared to the downlink active BWP SCS of the same carrier.

9.7.2.2 Requirements applicability

The requirements in clause 9.7.2 apply, provided:

- SRS resources configured for SRS-RSRP measurements are measurable.

An SRS resource configured for SRS-RSRP shall be considered measurable when for each relevant SRS the following conditions are met:

- SRS-RSRP related side conditions given in clauses 10.1.22.1 for FR1 and FR2 for a corresponding band,
- SRS_RP and SRS Ês/Iot according to Annex B.2.7 for a corresponding band.

9.7.2.3 Measurement Reporting Requirements

The UE shall send SRS-RSRP reports only for report configurations according to *reportType* which is *cliPeriodical* or *cliEventTriggered* when SRS-RSRP report is configured.

The UE shall report the SRS-RSRP value as a 7-bit value in the range [-140, -44] dBm with 1dB step size according to clause 10.1.22.1 for FR1 and FR2.

9.7.2.3.1 Periodic Reporting

Reported SRS-RSRP measurements contained in periodically triggered measurement reports shall meet the requirements in clause 10.1.22.1.

9.7.2.3.2 Event-triggered Periodic Reporting

Reported SRS-RSRP measurements contained in periodically triggered measurement reports shall meet the requirements in clauses 10.1.22.1.

The first report in event triggered periodic measurement reporting shall meet the requirements specified in clause 9.7.2.3.3.

9.7.2.3.3 Event Triggered Reporting

Reported SRS-RSRP measurements contained in periodically triggered measurement reports shall meet the requirements in clause 10.1.22.1.

The UE shall not send any event triggered measurement reports as long as no reporting criteria is fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: 2 x TTI_{DCCH}. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report on.

9.7.2.4 Measurement capability

The UE shall be capable of performing SRS-RSRP measurements on the SRS resources configured for measurement, provided that the number of SRS to be monitored by UE does not exceed 8 within a slot, and the total number of SRSs to be monitored by the UE does not exceed 32.

9.7.2.5 SRS-RSRP measurement period

The UE shall be capable of performing SRS-RSRP measurement based on the configured SRS resource, and the UE shall be capable of reporting SRS-RSRP measured over measurement period of $T_{SRS_RSRP_measurement_period}$ for FR1 and FR2.

Table 9.7.2.5-1 Measurement period $T_{SRS_RSRP_measurement_period}$

Configuration	$T_{SRS_measurement_period}$ (ms)
No DRX	Max(60, 3 X T_{SRS})
DRX cycle ≤ 320ms	Max(60, Ceil(1.5 X 3) X max(T_{SRS}, T_{DRX}))
DRX cycle > 320ms	3 X T_{DRX}
Note: T_{SRS} is SRS measurement periodicity configured *SRS-PeriodicityAndOffset*, and T_{DRX} is the DRX cycle length.	

If the SRS resources configured for measurement are partially or fully overlapping with SMTC window, SSB or CSI-RS configured for RLM, BFD, CBD or L1-RSRP measurement or measurement gaps, requirements are not specified for $T_{SRS_RSRP_measurement_period}$.

9.7.3 CLI-RSSI measurements

9.7.3.1 Introduction

When configured by the network, the UE shall be able to perform CLI-RSSI measurement of configured *rssi-ResourceConfigCLI*. The subcarrier spacing for CLI-RSSI measurement resource configuration can be same or different from the subcarrier spacing of active BWP. UE shall perform CLI-RSSI measurement with the SCS of the active BWP.

9.7.3.2 Requirements applicability

The requirements in clause 9.7.3 apply, provided:

- The measurement resources configured for CLI-RSSI measurements are measurable.

A measurement resource configured for CLI-RSSI shall be considered measurable when for each relevant CLI-RSSI resource the following conditions are met:

- CLI-RSSI related side conditions given in clauses 10.1.22.2 for FR1 and FR2 for a corresponding band.

9.7.3.3 Measurement Reporting Requirements

The UE shall send CLI-RSSI reports only for report configurations according to *reportType* which is *cliPeriodical* or *cliEventTriggered* when CLI-RSSI report is configured.

The UE shall report the CLI-RSSI value as a 7-bit value in the range [-100, -25] dBm with 1dB step size according to clause 10.1.22.2 for FR1 and FR2.

9.7.3.3.1 Periodic Reporting

Reported CLI-RSSI measurements contained in periodically triggered measurement reports shall meet the requirements in clause 10.1.22.2.

9.7.3.3.2 Event-triggered Periodic Reporting

Reported CLI-RSSI measurements contained in periodically triggered measurement reports shall meet the requirements in clauses 10.1.22.2.

The first report in event triggered periodic measurement reporting shall meet the requirements specified in clause 9.7.3.3.3.

9.7.3.3.3 Event Triggered Reporting

Reported CLI-RSSI measurements contained in periodically triggered measurement reports shall meet the requirements in clause 10.1.22.2.

The UE shall not send any event triggered measurement reports as long as no reporting criteria is fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: 2 x TTI_{DCCH}. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report on.

9.7.3.4 Measurement capability

The UE should be capable of performing CLI-RSSI measurement based on the configured resource, provided that the maximum number of CLI-RSSI measurement resources for the UE does not exceed 64.

9.7.3.5 CLI-RSSI measurement period

The UE shall be capable of performing CLI-RSSI measurement based on the configured measurement resource within $T_{CLI_RSSI_measurement_period}$. The UE shall be able to provide a single RSSI sample for each measurement resource configured for CLI-RSSI measurement occurring with a configured periodicity. The CLI-RSSI measurement period $T_{CLI_RSSI_measurement_period}$ corresponds to the CLI-RSSI measurement resource periodicity, which is configured for by higher layers via *RSSI-PeriodicityAndOffset*.

If the CLI-RSSI measurement resources configured for measurement are partially or fully overlapping with SMTC window, SSB or CSI-RS configured for RLM, BFD, CBD or L1-RSRP measurement or measurement gaps, requirements are not specified for $T_{CLI_RSSI_measurement_period}$.

9.7.4 Scheduling availability of UE during CLI measurements

Scheduling availability restrictions when the UE is performing CLI measurements which are SRS-RSRP and CLI-RSSI are described in the following clause.

9.7.4.1 Scheduling availability of UE performing measurement on FR1

The following scheduling restriction applies due to CLI measurements.

- The UE is not expected to transmit PUCCH/PUSCH/SRS on OFDM symbols on which the UE performs CLI measurements, and on 1 data symbol before an OFDM symbol used for CLI measurements for 15 kHz and 30 kHz subcarrier spacing.

- For the UE which does not support *cli-SRS-RSRP-FDM_DL*, the UE is not expected to receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on OFDM symbols on which the UE performs SRS-RSRP measurements, and on 1 data symbol before an OFDM symbol used for SRS-RSRP measurements for 15 kHz and 30 kHz subcarrier spacing.

- For the UE which does not support *cli-RSSI-FDM-DL*, the UE is not expected to receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on OFDM symbols on which the UE performs CLI-RSSI measurements, and on 1 data symbol before an OFDM symbol used for CLI-RSSI measurements for 15 kHz and 30 kHz subcarrier spacing.

- The UE is not expected to transmit PUCCH/PUSCH/SRS on OFDM symbols on which the UE performs CLI measurement, and on 2 data symbols before an OFDM symbol used for CLI measurements for 60 kHz subcarrier spacing.

- For the UE which does not support *cli-SRS-RSRP-FDM_DL*, the UE is not expected to receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on OFDM symbols on which the UE performs SRS-RSRP measurement, and on 2 data symbols before an OFDM symbol used for SRS-RSRP measurements for 60 kHz subcarrier spacing.

- For the UE which does not support *cli-RSSI-FDM-DL*, the UE is not expected to receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on OFDM symbols on which the UE performs CLI-RSSI measurement, and on 2 data symbols before an OFDM symbol used for CLI-RSSI measurements for 60 kHz subcarrier spacing.

When TDD intra-band carrier aggregation is configured, the scheduling restrictions on serving cell where CLI measurements are performed apply on all serving cells in the same band on the symbols that fully or partially overlap with restricted symbols.

9.7.4.2 Scheduling availability of UE performing measurement on FR2

The following scheduling restriction applies due to CLI measurements.

- The UE is not expected to transmit PUCCH/PUSCH/SRS on OFDM symbols on which the UE performs CLI measurements, and on 1 data symbol before an OFDM symbol used for CLI measurements for 60 kHz subcarrier spacing.

- For the UE which does not support *cli-SRS-RSRP-FDM_DL*, the UE is not expected to receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on OFDM symbols on which the UE performs SRS-RSRP measurements, and on 1 data symbol before an OFDM symbol used for SRS-RSRP measurements for 60 kHz subcarrier spacing.

- For the UE which does not support *cli-RSSI-FDM-DL*, the UE is not expected to receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on OFDM symbols on which the UE performs CLI-RSSI measurements, and on 1 data symbol before an OFDM symbol used for CLI-RSSI measurements for 60 kHz subcarrier spacing.

- The UE is not expected to transmit PUCCH/PUSCH/SRS on OFDM symbols on which the UE performs CLI measurements, and on 2 data symbols before an OFDM symbol used for CLI measurements for 120 kHz subcarrier spacing.

- For the UE which does not support *cli-SRS-RSRP-FDM_DL*, the UE is not expected to receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on OFDM symbols on which the UE performs SRS-RSRP measurements, and on 2 data symbols before an OFDM symbol used for SRS-RSRP measurements for 120 kHz subcarrier spacing.

- For the UE which does not support *cli-RSSI-FDM-DL*, the UE is not expected to receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on OFDM symbols on which the UE performs CLI-RSSI measurements, and on 2 data symbols before an OFDM symbol used for CLI-RSSI measurements for 120 kHz subcarrier spacing.

When TDD intra-band carrier aggregation is configured, the scheduling restrictions on serving cell where CLI measurements are performed apply on all serving cells in the same band on the symbols that fully or partially overlap with restricted symbols.

9.8 L1-SINR measurements for Reporting

9.8.1 Introduction

When configured by the network, the UE shall be able to perform L1-SINR measurements with the measurement resources configured as the selection of:

- CSI-RS based CMR and no dedicated IMR configured;

- SSB based CMR and dedicated IMR configured;

- CSI-RS based CMR and dedicated IMR configured.

The measurements shall be performed for a serving cell, including PCell, PSCell, or SCell, on the resources configured for L1-SINR measurements within the active BWP.

The UE shall be able to measure all CSI-RS resources and/or SSB resources and/or CSI-IM resources of the *nzp-CSI-RS-ResourceSet* and/or *csi-SSB-ResourceSet and/or CSI-IM-ResourceSet* within the *CSI-ResourceConfig* settings for L1-SINR for the active BWP and measure interference on corresponding NZP CSI-RS or CSI-IM resources if configured, provided that the number of resources does not exceed the UE capability indicated by *beamManagementSSB-CSI-RS.*

The UE shall report the measurement quantity (*reportQuantity*) and send periodic, semi-persistent or aperiodic reports, according to the *reportConfigType* according to the CSI reporting configuration(s) (*CSI-ReportConfig*) for the active BWP.

9.8.2 Requirements applicability

The requirements in clause 9.8 apply, provided:

- CMR resources configured for L1-SINR measurements are measurable, and
- NZP-IMR resources configured for L1-SINR measurements if applicable are measurable.

Requirements are defined for periodic, semi-persistent and aperiodic resources.

For CSI-RS based CMR and no dedicated IMR configured, a CSI-RS resource configured for L1-SINR shall be considered measurable when for each relevant CSI-RS the following conditions are met:

- L1-SINR related side conditions given in clauses 10.1.27 and 10.1.28 for FR1 and FR2, respectively, for a corresponding band,
- CSI-RS_RP and CSI-RS Ês/Iot according to Annex B.2.8.1 for a corresponding band.

For SSB based CMR and dedicated IMR configured, a SSB and a dedicated IMR configured for L1-SINR shall be considered measurable when for each relevant SSB and IMR the following conditions are met:

- L1-SINR related side conditions given in clauses 10.1.27 and 10.1.28 for FR1 and FR2, respectively, for a corresponding band,
- SSB_RP and SSB Ês/Iot according to Annex B.2.8.2 for a corresponding band.
- NZP-IMR Ês/Iot according to Annex B.2.8.2 for a corresponding band, if NZP-IMR is configured as dedicated IMR.

For CSI-RS based CMR and dedicated IMR configured, a CSI-RS and a dedicated IMR configured for L1-SINR shall be considered measurable when for each relevant CSI-RS and IMR the following conditions are met:

- L1-SINR related side conditions given in clauses 10.1.27 and 10.1.28 for FR1 and FR2, respectively, for a corresponding band,
- CSI-RS_RP and CSI-RS Ês/Iot according to Annex B.2.8.3 for a corresponding band
- NZP-IMR Ês/Iot according to Annex B.2.8.3 for a corresponding band, if NZP-IMR is configured as dedicated IMR.

9.8.3 Measurement Reporting Requirements

The UE shall send L1-SINR reports only for report configurations configured for the active BWP.

The UE shall report the L1-SINR value as a 7-bit value in the range [-23, 40] dB with 0.5dB step size if *nrofReportedRS* is configured to one. If *nrofReportedRS* is configured to be larger than one, or if *groupBasedBeamReporting* is enabled, the UE shall use differential L1-SINR based reporting. The differential L1-SINR is quantized to a 4-bit value with 1dB step size. The mapping between the reported L1-SINR value and the measured quantity is described in 10.1.16.

9.8.3.1 Periodic Reporting

Reported L1-SINR measurements contained in periodic L1-SINR measurement reports shall meet the requirements in clauses 10.1.27 for FR1 and 10.1.28 for FR2, respectively.

The UE shall transmit the periodic L1-SINR reporting on PUCCH over the air interface according to the periodicity defined in clause 5.2.1.4 in TS 38.214 [26].

9.8.3.2 Semi-Persistent Reporting

Reported L1-SINR measurements contained in a Semi-Persistent L1-SINR measurement report shall meet the requirements in clauses 10.1.27 for FR1 and 10.1.28 for FR2, respectively. This requirement applies for semi-persistent L1-SINR reports send on PUSCH or PUCCH.

The UE shall only send semi-persistent L1-SINR measurement reports on PUSCH, if a DCI for triggering report has been received.

The UE shall only send semi-persistent L1-SINR measurement reports on PUCCH, if an activation command as described in clause 6.1.3.16 in TS38.321 [7] has been received.

The UE shall transmit the semi-persistent L1-SINR reporting on PUSCH or PUCCH over the air interface according to the periodicity defined in clause 5.2.1.4 in TS 38.214 [26].

9.8.3.3 Aperiodic Reporting

Reported L1-SINR measurements contained in aperiodic triggered, aperiodic triggered periodic and aperiodic triggered semi-persistent L1-SINR reports shall meet the requirements in clauses 10.1.x for FR1 and 10.1.x for FR2, respectively.

The UE shall only send aperiodic L1-SINR measurement reports, if a DCI for triggering report has been received.

After the UE receives CSI request in DCI, the UE shall transmit the aperiodic L1-SINR reporting on PUSCH over the air interface at the time specified according to clause 5.2.1.4 in TS 38.214 [26].

9.8.4 L1-SINR measurement requirements

9.8.4.1 L1-SINR reporting with CSI-RS based CMR and no dedicated IMR configured

edicated resource configured as IMR for L1-SINR computation, and the UE physical layer shall be capable of reporting L1-SINR measured over the measurement period of $T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_Only}$.

The value of $T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_Only}$ is defined in Table 9.8.4.1-1 for FR1 and in Table 9.8.4.1-2 for FR2, where

For the value of M,

- For periodic and semi-persistent CSI-RS resources as CMR, M=1 if higher layer parameter *timeRestrictionForChannelMeasurement* is configured, and M=3 otherwise;

- For aperiodic CSI-RS resources as CMR, M=1.

For the value of N in FR2

- For periodic CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to OFF, N=1. The requirements apply if *qcl-InfoPeriodicCSI-RS* is configured for all the resources in the resource set and for each resource one RS has QCL-TypeD with

  - SSB for L1-RSRP or L1-SINR measurement, or

  - another CSI-RS in resource set configured with repetition ON.

- For periodic CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to ON, N=ceil(*maxNumberRxBeam* / $N_{res_per_set}$), where $N_{res_per_set}$ is number of resources in the resource set. The requirements apply provided *qcl-InfoPeriodicCSI-RS* is configured for all resources in the resource set.

- For semi-persistent CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to OFF, N=1. The requirements apply provided TCI state is provided for all resources in the resource set in the MAC CE activating the resource set and for each resource has QCL-TypeD with

  - SSB for L1-RSRP or L1-SINR measurement, or

  - another CSI-RS in resource set configured with repetition ON.

- For semi-persistent CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to ON, N=ceil(*maxNumberRxBeam* / $N_{res_per_set}$), where $N_{res_per_set}$ is number of resources in the resource set. The requirements apply provided TCI state is provided for all resources in the resource set in the MAC CE activating the resource set.

- For aperiodic CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to OFF, N=1. The requriements apply provided *qcl-info* is configured for all resources in the resource set and for each resource has QCL-TypeD with

  - SSB for L1-RSRP or L1-SINR measurement, or

  - another CSI-RS in resource set configured with repetition ON.

- For aperiodic CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to ON, N=1. UE is not required to meet the accuracy requirements in clause 10.1.28.1 and 10.1.28.3 if number of resources in the resource set is smaller than *maxNumberRxBeam*. The requriements apply provided *qcl-info* is configured for all resources in the resource set.

When UE supports concurrent measurement gap and concurrent gaps are configured,

- P value for a CSI-RS resource to be measured is defined as

  - N_{total} / $N_{outside_MG}$ in FR1

  - $P_{sharing\ factor}$ * N_{total} / $N_{outside_MG}$ in FR2 with $N_{available}$ = 0

  - N_{total} / $N_{available}$ in FR2 with Navailable > 0

- For a window W of duration max($T_{L1,}$ MGRP_max), where MGRP max is the maximum MGRP across all configured per-UE measurement gaps and per-FR measurement gaps within the same FR as serving cell, and starting at the beginning of any CSI-RS resource occasion:

  - N_{total} is the total number of CSI-RS resource occasions within the window, including those overlapped with measurement gap occasions or SMTC occasions within the window, and

  - $N_{outside_MG}$ is the number of CSI-RS resource occasions that are not overlapped with any measurement gap occasion within the window W

  - $N_{available}$ is the number of CSI-RS resource occasions that are not overlapped with any measurement gap occasion nor any SMTC occasion within the window W

  - T_{L1} is periodicity of the target CSI-RS.

Otherwise, for a UE not supporting *concurrentMeasGap-r17* or when concurrent gaps are not configured,

For the value of P in FR1,

- $P=\frac{1}{1-\frac{T_{CSI-RS}}{xGP}}$, when in the monitored cell there are [measurement gaps] configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the CSI-RS; and

- P=1 when in the monitored cell there are no GAPs overlapping with any occasion of the CSI-RS.

For the value of P in FR2,

- P=1, when CSI-RS is not overlapped with GAP and also not overlapped with SMTC occasion.
- $P=\frac{1}{1-\frac{T_{CSI-RS}}{xGP}}$, when CSI-RS is partially overlapped with GAP and CSI-RS is not overlapped with SMTC occasion (T_{CSI-RS} < xRP)
- $P=\frac{1}{1-\frac{T_{CSI-RS}}{T_{SMTCperiod}}}$, when CSI-RS is not overlapped with GAP and CSI-RS is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$).
- P is $P_{sharing\ factor}$,, when CSI-RS is not overlapped with [measurement gap] and CSI-RS is fully overlapped with SMTC occasion ($T_{CSI-RS} = T_{SMTCperiod}$).
- $P=\frac{1}{1-\frac{T_{CSI-RS}}{xGP}-\frac{T_{CSI-RS}}{T_{SMTCperiod}}}$, when CSI-RS is partially overlapped with [measurement gap] and CSI-RS is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with GAP and
  - $T_{SMTCperiod} \neq$ xRP or
  - $T_{SMTCperiod}$ = xRP and $T_{CSI-RS} < 0.5*T_{SMTCperiod}$
- $P=\frac{P_{sharing\ factor}}{1-\frac{T_{CSI-RS}}{xGP}}$, when CSI-RS is partially overlapped with [measurement gap] and CSI-RS is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with GAP and $T_{SMTCperiod}$ = xRP and $T_{CSI-RS} = 0.5*T_{SMTCperiod}$
- $P=\frac{1}{1-\frac{T_{CSI-RS}}{\min(T_{SMTCperiod},xRP)}}$, when CSI-RS is partially overlapped with [measurement gap] (T_{CSI-RS} < xRP) and CSI-RS is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with GAP .
- $P=\frac{P_{sharing\ factor}}{1-\frac{T_{CSI-RS}}{xGP}}$, when CSI-RS is partially overlapped with [measurement gap] and CSI-RS is fully overlapped with SMTC occasion ($T_{CSI-RS} = T_{SMTCperiod}$) and SMTC occasion is partially overlapped with GAP ($T_{SMTCperiod}$ < xRP)

Where:

$P_{sharing\ factor}$ = 1, if the CSI-RS configured for L1-SINR measurement outside gap is

not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and,

not overlapped by the RSSI symbols indicated by *ss-RSSI-Measurement* and 1 data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured.

- $P_{sharing\ factor}$ = 3, otherwise.
  - $T_{SMTCperiod}$ = the configured SMTC1 period or SMTC2 period if configured.
  - T_{CSI-RS} = the periodicity of CSI-RS configured for L1-SINR measurement
- If the UE is configured with Pre-MG, a CSI-RS reourse or an SMTC occasion is only considered to be overlapped by the Pre-MG if the Pre-MG is activated.
- When a measurement gap is configured and the measurement gap is not NCSG,
  - a CSI-RS is considered to be overlapped with the GAP if it overlaps a measurement gap occasion, and
  - xRP = MGRP
- Otherwise, when NCSG measurement gap is configured,

- a CSI-RS is considered to be overlapped with the GAP if
  - it overlaps the VIL1 or VIL2 of NCSG, or
  - it overlaps the ML of NCSG in FR2, and there exists a target carrier to be measured within NCSG that is intra-frequency carrier or inter-frequency carrier in the same band as the serving cell, or inter-frequency carrier in different band as the serving cell and UE does not support IBM between the target carrier and the serving cell,
- and
  - xRP = VIRP
- When concurrent gaps are configured, a CSI-RS or an SMTC occasion is not considered to be overlapped by a gap occasion if the gap occasion is dropped according to 9.1.8.

If the high layer in TS 38.331 [2] signaling of *smtc2* is configured, $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc2*; Otherwise $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc1*.

Note: The overlap between CSI-RS for L1-SINR measurement and SMTC means that CSI-RS for L1-SINR measurement is within the SMTC window duration.

Longer evaluation period would be expected if the combination of CSI-RS, SMTC occasion and GAP configurations does not meet pervious conditions.

Table 9.8.4.1-1: Measurement period $T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_Only}$ for FR1

Configuration	$T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_Only}$ (ms)
non-DRX	$\max(T_{Report}, \text{ceil}(M*P)*T_{CSI\text{-}RS})$
DRX cycle ≤ 320ms	$\max(T_{Report}, \text{ceil}(1.5*M*P)*\max(T_{DRX},T_{CSI\text{-}RS}))$
DRX cycle > 320ms	$\text{ceil}(M*P)*T_{DRX}$
Note 1: $T_{CSI\text{-}RS}$ is the periodicity of CSI-RS configured for L1-SINR measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting. Note 2: the requirements are applicable provided that the CSI-RS resource configured for L1-SINR measurement is transmitted with Density = 3.	

Table 9.8.4.1-2: Measurement period $T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_Only}$ for FR2

Configuration	$T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_Only}$ (ms)
non-DRX	$\max(T_{Report}, \text{ceil}(M*P*N)*T_{CSI\text{-}RS})$
DRX cycle ≤ 320ms	$\max(T_{Report}, \text{ceil}(1.5*M*P*N)*\max(T_{DRX},T_{CSI\text{-}RS}))$
DRX cycle > 320ms	$\text{ceil}(M*P*N)*T_{DRX}$
Note 1: $T_{CSI\text{-}RS}$ is the periodicity of CSI-RS configured for L1-SINR measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting. Note 2: the requirements are applicable provided that the CSI-RS resource configured for L1-SINR measurement is transmitted with Density = 3.	

9.8.4.2 L1-SINR reporting with SSB based CMR and dedicated IMR configured

The UE shall be capable of performing L1-SINR measurements with the SSB configured as CMR and dedicated resource configured as IMR for L1-SINR computation, in which the NZP-CSI-RS or CSI-IM resource configured as dedicated IMR shall be 1-to-1 mapped to SSB configured as CMR, with the same periodicity. The UE physical layer shall be capable of reporting L1-SINR measured over the measurement period of $T_{L1\text{-}SINR_Measurement_Period_SSB_CMR_IMR}$.

The requirements in this clause are not applicable if NZP-CSI-RS or CSI-IM resource configured as dedicated IMR is scheduled with different periodicity as SSB configured as CMR.

The value of $T_{L1\text{-}SINR_Measurement_Period_SSB_CMR_IMR}$ is defined in Table 9.8.4.2-1 for FR1 and in Table 9.8.4.2-2 for FR2 when *highSpeedMeasFlagFR2-r17* is not configured, and defined in Table 9.8.4.2-3 for FR2 power class 6 UE when *highSpeedMeasFlagFR2-r17* is configured, where

For the value of M

- For periodic or semi-persistent NZP CSI-RS or CSI-IM resource as dedicated IMR, M=1 if the higher layer parameters *timeRestrictionForChannelMeasurements* and/or *timeRestrictionForInterferenceMeasurements* are configured, and M=3 otherwise;

For the value of N in FR2

- N = 8.

P is defined as the maximum value between P_{CMR} and P_{IMR}, i.e., P = max(P_{CMR}, P_{IMR}), where

- the value of P_{CMR} shall be derived in the same way as the value of P used for SSB based L1-RSRP measurement in clause 9.5.4.1, in which the occasions and period of the SSB for CMR shall be used instead.

- the value of P_{IMR} shall be derived in the same way as the value of P used for CSI-RS based L1-RSRP measurement in clause 9.5.4.2, in which the occasions and period of the NZP CSI-RS for NZP-IMR or CSI-IM for ZP-IMR shall be used instead.

Longer evaluation period would be expected if the combination of SSB, SMTC occasion and measurement gap configurations does not meet pervious conditions.

For L1-SINR measurement with SSB as CMR and CSI-RS or CSI-IM as IMR, the requirement shall apply if the CSI-RS is configured as IMR with repetition field as “repetition = OFF” or CSI-IM is configured as IMR.

For L1-SINR measurement with SSB as CMR and CSI-RS/CSI-IM as IMR, no requirement shall apply if SSB occasions for CMR or CSI-RS/CSI-IM occasions for IMR are fully overlapped with the configured measurement gap

Table 9.8.4.2-1: Measurement period $T_{L1\text{-}SINR_Measurement_Period_SSB_CMR_IMR}$ for FR1

Configuration	$T_{L1\text{-}SINR_Measurement_Period_SSB_CMR_IMR}$ (ms)
non-DRX	max(T_{Report}, ceil(M*P)*T_{SSB})
DRX cycle ≤ 320ms	max(T_{Report}, ceil(1.5*M*P)*max(T_{DRX},T_{SSB}))
DRX cycle > 320ms	ceil(M*P)*T_{DRX}
Note 1: T_{SSB} = ssb-periodicityServingCell is the periodicity of the SSB-Index configured for L1-SINR channel measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting. Note 2: The requirements are applicable provided that the CSI-RS resource configured for interference measurement shall be 1-to-1 mapped to SSB configured for channel measurement, with the same periodicity.	

Table 9.8.4.2-2: Measurement period $T_{L1\text{-}SINR_Measurement_Period_SSB_CMR_IMR}$ for FR2

Configuration	$T_{L1\text{-}SINR_Measurement_Period_SSB_CMR_IMR}$ (ms)
non-DRX	max(T_{Report}, ceil(M*P*N)*T_{SSB})
DRX cycle ≤ 320ms	max(T_{Report}, ceil(1.5*M*P*N)*max(T_{DRX},T_{SSB}))
DRX cycle > 320ms	ceil(1.5*M*P*N)*T_{DRX}
Note 1: T_{SSB} = ssb-periodicityServingCell is the periodicity of the SSB-Index configured for L1-SINR measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting. Note 2: The requirements are applicable provided that the CSI-RS resource configured for interference measurement shall be 1-to-1 mapped to SSB configured for channel measurement, with the same periodicity.	

Table 9.8.4.2-3: Measurement period $T_{L1\text{-}SINR_Measurement_Period_SSB_CMR_IMR}$ configured with *highSpeedMeasFlagFR2-r17* for FR2

Configuration	$T_{L1\text{-}SINR_Measurement_Period_SSB_CMR_IMR}$ (ms)
non-DRX	max(T_{Report}, ceil(M*P*N1[Note 3])*T_{SSB})
DRX cycle ≤ 80ms	max(T_{Report}, ceil(M*P*N1[Note 3]*M2)*max(T_{DRX},T_{SSB}))
80ms< DRX cycle ≤ 320ms	max(T_{Report}, ceil(1.5*M*P*N)*max(T_{DRX},T_{SSB}))
DRX cycle > 320ms	ceil(1.5*M*P*N)*T_{DRX}

Note 1:	T_{SSB} = ssb-periodicityServingCell is the periodicity of the SSB-Index configured for L1-SINR measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting.
Note 2:	The requirements are applicable provided that the CSI-RS resource configured for interference measurement shall be 1-to-1 mapped to SSB configured for channel measurement, with the same periodicity.
Note 3:	N1 = 2 when *highSpeedMeasFlagFR2-r17* = set1; N1 = 6 when *highSpeedMeasFlagFR2-r17* = set2.
Note 4:	M2 = 1.5 if SMTC periodicity > 40 ms; otherwise M2 = 1

9.8.4.3 L1-SINR reporting with CSI-RS based CMR and dedicated IMR configured

The UE shall be capable of performing L1-SINR measurements with the CSI-RS resource configured as CMR and dedicated resource configured as IMR for L1-SINR computation, in which the NZP-CSI-RS or CSI-IM resource configured as dedicated IMR shall be 1-to-1 mapped to CSI-RS resource configured as CMR, with the same periodicity. The UE physical layer shall be capable of reporting L1-SINR measured over the measurement period of $T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_IMR}$.

The requirements in this clause are not applicable if NZP-CSI-RS or CSI-IM resource configured as dedicated IMR is scheduled with different periodicity as CSI-RS resource configured as CMR.

The value of $T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_IMR}$ is defined in Table 9.8.4.3-1 for FR1 and in Table 9.8.4.3-2 for FR2, where

For the value of M,

- M=1 shall be applied if
  - aperiodic NZP-CSI-RS as CMR or dedicated IMR, or
  - aperiodic CSI-IMR as dedicated IMR, or
  - periodic and semi-persistent NZP-CSI-RS as CMR or dedicated IMR and the higher layer parameters *timeRestrictionForChannelMeasurement* and/or *timeRestrictionForInterferenceMeasurements* are configured, or
  - periodic and semi-persistent CSI-IM as dedicated IMR and the higher layer parameters *timeRestrictionForChannelMeasurement* and/or *timeRestrictionForInterferenceMeasurements* are configured;
- M=3 otherwise.

For the value of N in FR2

- For periodic CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to OFF, N=1. The requirements apply if *qcl-InfoPeriodicCSI-RS* is configured for all the resources in the resource set and for each resource one RS has QCL-TypeD with
  - SSB for L1-RSRP or L1-SINR measurement, or
  - another CSI-RS in resource set configured with repetition ON.
- For periodic CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to ON, N=ceil(*maxNumberRxBeam* / $N_{res_per_set}$), where $N_{res_per_set}$ is number of resources in the resource set. The requirements apply provided *qcl-InfoPeriodicCSI-RS* is configured for all resources in the resource set.
- For semi-persistent CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to OFF, N=1. The requirements apply provided TCI state is provided for all resources in the resource set in the MAC CE activating the resource set and for each resource has QCL-TypeD with
  - SSB for L1-RSRP or L1-SINR measurement, or
  - another CSI-RS in resource set configured with repetition ON.

- For semi-persistent CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to ON, N=ceil(*maxNumberRxBeam* / $N_{res_per_set}$), where $N_{res_per_set}$ is number of resources in the resource set. The requirements apply provided TCI state is provided for all resources in the resource set in the MAC CE activating the resource set.

- For aperiodic CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to OFF, N=1. The requriements apply provided *qcl-info* is configured for all resources in the resource set and for each resource has QCL-TypeD with

  - SSB for L1-RSRP or L1-SINR measurement, or

  - another CSI-RS in resource set configured with repetition ON.

- For aperiodic CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to ON, N=1. UE is not required to meet the accuracy requirements in clause 10.1.28.1 and 10.1.28.3 if number of resources in the resource set is smaller than *maxNumberRxBeam*. The requriements apply provided *qcl-info* is configured for all resources in the resource set.

P is defined as the maximum value between P_{CMR} and P_{IMR}, i.e., $P = \max(P_{CMR}, P_{IMR})$, where

- The value of P_{CMR} and P_{IMR} shall be derived in the same way as the value of P used for CSI-RS based L1-RSRP measurement in clause 9.5.4.2, in which the occasions and period of the CSI-RS for CMR and NZP CSI-RS for NZP-IMR or CSI-IM for ZP-IMR shall be used instead respectively.

Longer evaluation period would be expected if the combination of CSI-RS, SMTC occasion and measurement gap configurations does not meet pervious conditions.

For L1-SINR measurement with CSI-RS as CMR and CSI-RS as IMR, the requirement shall apply only if CSI-RS resources as CMR and IMR are configured with the same repetition field and the number of CSI-RS resources in the resource sets for CMR and IMR are same.

For L1-SINR measurement with CSI-RS as CMR and CSI-IM as IMR, the requirement shall apply only if the number of CSI-RS resources in the resource set for CMR and the number of CSI-IM resources in the resource set for IMR are same.

For L1-SINR measurement with CSI-RS as CMR and CSI-RS/CSI-IM as IMR, no requirement shall apply if CSI-RS occasions for CMR or CSI-RS/CSI-IM occasions for IMR are fully overlapped with the configured measurement gap.

Table 9.8.4.3-1: Measurement period $T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_IMR}$ for FR1

Configuration	$T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_IMR}$ (ms)
non-DRX	$\max(T_{Report}, \text{ceil}(M*P)*T_{CSI\text{-}RS})$
DRX cycle ≤ 320ms	$\max(T_{Report}, \text{ceil}(1.5*M*P)*\max(T_{DRX},T_{CSI\text{-}RS}))$
DRX cycle > 320ms	$\text{ceil}(M*P)*T_{DRX}$
Note 1: $T_{CSI\text{-}RS}$ is the periodicity of CSI-RS configured for L1-SINR measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting. Note 2: the requirements are applicable provided that the CSI-RS resource configured for L1-SINR measurement is transmitted with Density = 3. Note 3: The requirements are applicable provided that the CSI-RS resource configured for interference measurement shall be 1-to-1 mapped to CSI-RS configured for channel measurement, with the same periodicity.	

Table 9.8.4.3-2: Measurement period $T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_IMR}$ for FR2

Configuration	$T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_IMR}$ (ms)
non-DRX	$\max(T_{Report}, \text{ceil}(M*P*N)*T_{CSI\text{-}RS})$
DRX cycle ≤ 320ms	$\max(T_{Report}, \text{ceil}(1.5*M*P*N)*\max(T_{DRX},T_{CSI\text{-}RS}))$
DRX cycle > 320ms	$\text{ceil}(M*P*N)*T_{DRX}$
Note 1: $T_{CSI\text{-}RS}$ is the periodicity of CSI-RS configured for L1-SINR measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting. Note 2: the requirements are applicable provided that the CSI-RS resource configured for L1-SINR measurement is transmitted with Density = 3.	

Note 3:	The requirements are applicable provided that the CSI-RS resource configured for interference measurement shall be 1-to-1 mapped to CSI-RS configured for channel measurement, with the same periodicity.

9.8.5 Measurement restriction for L1-SINR measurement

The UE is required to be capable of measuring L1-SINR without measurement gaps. The UE is required to perform the SSB and CSI-RS/CSI-IM measurements with measurement restrictions as described in the following clauses.

9.8.5.1 Measurement restriction if SSB configured for L1-SINR Measurement

For FR1, when the SSB configured as CMR for L1-SINR measurement is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for L1-SINR measurement without any restriction;
- If SSB and CSI-RS have different SCS,
  - If UE supports *simultaneousRxDataSSB-DiffNumerology*, UE shall be able to measure the SSB for L1-SINR measurement without any restriction;
  - If UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both SSB for L1-SINR measurement and CSI-RS. Longer measurement period for SSB based L1-SINR measurement is expected, and no requirements are defined.

For FR2, when the SSB configured as CMR for L1-SINR measurement on one CC is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both SSB for L1-SINR measurement and CSI-RS. Longer measurement period for SSB based L1-RSRP measurement is expected, and no requirements are defined.

For FR2, there is no measurement restriction allowed when the network configures mixed numerology between SSB configured as CMR for L1-SINR measurement on one FR2 band and CSI-RS for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement on the other FR2 band, provided that UE is capable of independent beam management on this FR2 band pair.

9.8.5.2 Measurement restriction if CSI-RS configured for L1-SINR measurement

For both FR1 and FR2, when the CSI-RS configured for L1-SINR measurement is in the same OFDM symbol as SSB for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement, UE is not required to receive CSI-RS for L1-SINR measurement in the PRBs that overlap with an SSB.

For FR1, when the SSB for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement is within the active BWP and has same SCS than CSI-RS configured for L1-SINR measurement, the UE shall be able to perform CSI-RS measurement without restrictions.

For FR1, when the SSB for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement is within the active BWP and has different SCS than CSI-RS configured for L1-SINR measurement, the UE shall be able to perform CSI-RS measurement with restrictions according to its capabilities:

- If the UE supports *simultaneousRxDataSSB-DiffNumerology*, UE shall be able to perform CSI-RS measurement without restrictions.
- If the UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both CSI-RS for L1-SINR measurement and SSB. Longer measurement period for CSI-RS based L1-SINR measurement is expected, and no requirements are defined.

For FR1, when the CSI-RS configured for L1-SINR measurement is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement, UE shall be able to measure the CSI-RS for L1-SINR measurement without any restriction.

For FR2, when the CSI-RS configured for L1-SINR measurement on one CC is in the same OFDM symbol as SSB for RLM, BFD, L1-RSRP or L1-SINR measurement on the same CC or different CCs in the same band, or in the same symbol as SSB for CBD measurement on the same CC or different CCs in the same band when beam failure is detected, UE is required to measure one of but not both CSI-RS for L1-SINR measurement and SSB. Longer measurement period for CSI-RS based L1-SINR measurement is expected, and no requirements are defined.

For FR2, when the CSI-RS configured for L1-SINR measurement on one CC is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement on the same CC or different CCs in the same band,

- In the following cases, UE is required to measure one of but not both CSI-RS for L1-SINR measurement and the other CSI-RS. Longer measurement period for CSI-RS based L1-SINR measurement is expected, and no requirements are defined.
  - The CSI-RS for L1-SINR measurement or the other CSI-RS in a resource set configured with repetition ON, or
  - The CSI-RS or the other CSI-RS is configured as dedicated IMR for L1-SINR computation with SSB as CMR, or
  - The other CSI-RS is configured in q1 and beam failure is detected, or
  - The two CSI-RS-es are not QCL-ed w.r.t. QCL-TypeD, or the QCL information is not known to UE,
- Otherwise, UE shall be able to measure the CSI-RS configured for L1-SINR measurement without any restriction.

9.8.5.3 Measurement restriction if CSI-IM configured for L1-SINR measurement

For both FR1 and FR2, when the CSI-IM configured for L1-SINR measurement is in the same OFDM symbol as SSB for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement, UE is not required to measure CSI-IM for L1-SINR measurement in the PRBs that overlap with an SSB.

For FR1, UE shall be able to measure the CSI-IM configured for L1-SINR measurement without any restriction.

For FR2, when the CSI-IM configured for L1-SINR measurement on one CC is in the same OFDM symbol as SSB for RLM, BFD, L1-RSRP or L1-SINR measurement on the same CC or different CCs in the same band, or in the same symbol as SSB for CBD measurement on the same CC or different CCs in the same band when beam failure is detected, UE is required to measure one of but not both CSI-IM for L1-SINR measurement and SSB. Longer measurement period for L1-SINR measurement is expected, and no requirements are defined.

For FR2, when the CSI-IM configured for L1-SINR measurement on one CC is in the same OFDM symbol as the CSI-RS for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement on the same CC or different CCs in the same band,

- In the following cases, UE is required to measure one of but not both CSI-IM for L1-SINR measurement and CSI-RS. Longer measurement period for L1-SINR measurement is expected, and no requirements are defined.
  - The CSI-RS in a resource set configured with repetition ON, or
  - The CSI-IM or the CSI-RS is configured as dedicated IMR for L1-SINR computation with SSB as CMR, or
  - The CSI-RS is configured in q1 and beam failure is detected, or
  - The CMR for L1-SINR measurement and the CSI-RS are not QCL-ed w.r.t. QCL-TypeD, or the QCL information is not known to UE,
- Otherwise, UE shall be able to measure the CSI-IM configured for L1-SINR measurement without any restriction.

9.8.6 Scheduling availability of UE during L1-SINR measurement

Scheduling availability restrictions when the UE is performing L1-SINR measurement are described in the following clauses.

9.8.6.1 Scheduling availability of UE performing L1-SINR measurement with a same subcarrier spacing as PDSCH/PDCCH on FR1

There are no scheduling restrictions due to L1-SINR measurement performed on SSB and CSI-RS configured for L1-SINR measurement with the same SCS as PDSCH/PDCCH in FR1.

9.8.6.2 Scheduling availability of UE performing L1-SINR measurement with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UEs which support *simultaneousRxDataSSB-DiffNumerology* [14] there are no restrictions on scheduling availability due to L1-SINR measurement based on SSB configured for L1-SINR measurement. For UEs which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to L1-SINR measurement based on SSB configured for L1-SINR measurement.

- The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/CSI-RS for tracking /CSI-RS for CQI on SSB symbols to be measured for L1-SINR measurement.

When intra-band carrier aggregation in FR1 is configured, the scheduling restrictions on serving cell where L1-SINR measurement is performed apply to all serving cells in the same band on the symbols that fully or partially overlap with restricted symbols. When inter-band carrier aggregation within FR1 is configured, there are no scheduling restrictions on FR1 serving cell(s) configured in other bands than the bands in which the serving cell where L1-SINR measurement is performed is configured.

9.8.6.3 Scheduling availability of UE performing L1-SINR measurement on FR2

The following scheduling restriction applies due to L1-SINR measurement.

- For the cases of CSI-RS used for L1-SINR measurement of CSI-RS based CMR only case and CSI-RS based CMR plus CSI-RS based ZP-IMR/NZP-IMR case and CSI-RS based CMR plus ZP-IMR case, where CSI-RS is QCLed with active TCI state for PDCCH/PDSCH and not in a CSI-RS resource set with repetition ON, and N=1 applies as specified in clause 9.8.4
  - There are no scheduling restrictions due to L1-SINR measurement performed based on the CSI-RS.
- Otherwise
  - The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on the CSI-RS for L1-RSRP measurement symbols to be measured for L1-SINR for FR2 power class 6 UE which is not configured with *highSpeedMeasFlagFR2-r17*, and for the UE not supporting FR2 power class 6;
  - The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on the symbols to be measured for L1-SINR, and on 1 data symbol before symbols to be measured for L1-SINR and 1 data symbol after symbols to be measured for L1-SINR for FR2 power class 6 UE configured with *highSpeedMeasFlagFR2-r17*.

When intra-band carrier aggregation is performed, the scheduling restrictions on serving cell where L1-SINR measurement is performed apply to all serving cells in the band on the symbols that fully or partially overlap with restricted symbols.

If following conditions are met,

- UE has been notified about system information update through paging,
- The gap between UE's reception of PDCCH that UE monitors in the Type 2-PDCCH CSS set and that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots,

for the SSB and CORESET for RMSI scheduling multiplexing patterns 3, UE is expected to receive the PDCCH that UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured for L1-SINR measurement; and

for the SSB and CORESET for RMSI scheduling multiplexing patterns 2, UE is expected to receive PDSCH that corresponds to the PDCCH that UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured for L1-SINR measurement.

9.8.6.4 Scheduling availability of UE performing L1-SINR measurement on FR1 or FR2 in case of FR1-FR2 inter-band CA

There are no scheduling restrictions on FR1 serving cell(s) due to L1-SINR measurement performed on FR2 serving cell(s).

There are no scheduling restrictions on FR2 serving cell(s) due to L1-SINR measurement performed on FR1 serving cell(s).

9.9 NR measurements for positioning

9.9.1 Introduction

This clause contains requirements for UE capable of performing NR positioning measurements defined in TS 38.215 [4], including RSTD, PRS-RSRP, UE Rx-Tx time difference, NR E-CID, and PRS-RSRPP measurements.

9.9.1.1 General Aspects of Gap-based Measurement

For gap-based RSTD, PRS-RSRP, UE Rx-Tx time difference, and PRS-RSRPP measurements, the requirements in clauses 9.9.2.5, 9.9.3.5, 9.9.4.5 and 9.9.6.5 apply provided:

- the UE is configured or pre-configured with measurement gaps
- if the measurement gap is pre-configured, the gap must be activated throughout the measurement period, and
- if concurrent measurement gaps are configured, all positioning frequency layers are associated with only one of the measurement gaps, and
- if the UE does not support PRS measurements with per-FR gaps, the configured or pre-configured gap used to perform the PRS measurements must be of per-UE type, and
- No active BWP switching occurs during the measurement gaps for PRS measurement, and

All measurement requirements specified in clause 9.9.2.5, 9.9.3.5, 9.9.4.5 and 9.9.6.5 shall apply without DRX as well as for any DRX configuration specified in TS 38.331 [2].

UE is only required to measure PRS resources that are fully or partially overlapped with measurement gaps, and the requirements in clause 9.9.2.5, 9.9.3.5, 9.9.4.5 and 9.9.6.5 are applicable to PRS resources that are fully or partially overlapped with measurement gaps.

A PRS resource is considered to be fully (partially) overlapped with measurement gaps if all (some) of its instances are overlapped with a measurement gap occasion. A PRS resource instance is considered to be overlapped with measurement gap occasion if the minimum number of unmuted repetitions of the instance taking into account *nr-DL-PRS-ExpectedRSTD-Uncertainty* and *nr-DL-PRS-ExpectedRSTD* is fully covered by the MGL excluding RF switching time, where the minimum number is given in the accuracy requirements in clause 10.1.23, 10.1.24, 10.1.25 and 10.1.38 for RSTD, PRS-RSRP, UE Rx-Tx time difference and PRS-RSRPP, respectively.

When UE is configured with measurement for more than one positioning requests, the measurement period for each request may be longer than measurement period when UE is configured with measurement for single positioning request.

If a positioning measurement gap is configured via *PosGapConfig* and activated by MAC CE, the measurement requirements in clause 9.9.2.5, 9.9.3.5, 9.9.4.5 and 9.9.6.5 apply provided that no other MGs are configured, and only one measurement gap configured via *PosGapConfig* is activated.

9.9.1.2 General Aspects of Gapless Measurement

The requirements for RSTD, PRS-RSRP, UE Rx-Tx time difference, and PRS-RSRPP measurement without measurement gaps specified in clauses 9.9.2.7, 9.9.3.6, 9.9.4.6 and 9.9.6.6 shall apply provided that:

UE is configured with PPW,

No active BWP switching occurs during PPW,

PRS is within PPW and does not overlap with other signals/channels of higher priority,

- for PPW type 1A/1B, the PPW does not overlap with any symbol for SSB-based RLM/BFD/CBD/L1-RSRP/L1-SINR measurement on any CC or for SSB based RRM measurement on any MOs that are measured outside measurement gaps,
- for PPW type 2, PRS does not overlap with any symbol for SSB-based RLM/BFD/CBD/L1-RSRP/L1-SINR measurement on any CC or for SSB based RRM measurement on any MOs that are measured outside measurement gaps,

$\max | \Delta T | \leq THR$, where

ΔT is the time difference between the start of a slot containing PRS from the neighbor cell/TRP and the start of the closest slot from the serving cell;

the range of ΔT is determined by the expected RSTD and expected RSTD uncertainty in the assistance data;

THR is the threshold as reported in UE capability *prs-MeasurementWithoutMG-r17*.

SCS of PRS within PPW and SCS of DL active BWP are the same.

All measurement requirements specified in clauses 9.9.2.7, 9.9.3.6, 9.9.4.6 and 9.9.6.6 shall apply without DRX as well as for any DRX configuration specified in TS 38.331 [2].

The UE is not required to perform additional SSB measurement for the SSB configured as QCL source of PRS resources.

The UE is only required to measure PRS resources that are unmuted and fully or partially overlapped with PPW, and the requirements in clauses 9.9.2.7, 9.9.3.6, 9.9.4.6 and 9.9.6.6 are applicable to PRS resources that are unmuted and fully or partially overlapped with PPW.

A PRS resource is considered to be fully (partially) overlapped with PPW if all (some) of its instances are overlapped with a PPW occasion. A PRS resource instance is considered to be overlapped with PPW occasion if the minimum number of unmuted repetitions of the instance taking into account Rx time difference between serving and non-serving cell is fully covered by the PPW excluding RF switching time, where the minimum number is given in the accuracy requirements in clause 10.1.23, 10.1.24, 10.1.25 and 10.1.38 for RSTD, PRS-RSRP, UE Rx-Tx time difference and PRS-RSRPP, respectively.

When UE is configured with measurement for more than one positioning requests, the measurement period for each request may be longer than measurement period when UE is configured with measurement for single positioning request.

9.9.1.3 Scheduling Availability of UE during PRS Measurement without Measurement Gaps

The requirements in this clause apply for UE performing RSTD, PRS-RSRP, UE Rx-Tx time difference and PRS-RSRPP measurement without measurement gaps.

If Cap. 1A UE capable of supporting priority options 1,2, and 3 is configured with priority state 1 for PRS RSTD measurement, then UE is not expected to receive PDCCH/PDSCH/CSI-RS on all symbols within PRS processing window.

If Cap.1A UE capable of supporting priority option 2 is configured with priority state 2 for PRS RSTD measurement, then UE is not expected to receive PDSCH/CSI-RS on all symbols within PRS processing window but is expected to receive PDCCH and URLLC PDSCH within PRS processing window.

If Cap. 1B UE capable of supporting priority options 1,2, and 3 is configured with priority state 1 for PRS RSTD measurement, then UE is not expected to receive PDCCH/PDSCH/CSI-RS from a certain [band or CC] on all symbols within PRS processing window.

If Cap. 1B UE capable of supporting priority option 2 is configured with priority state 2 for PRS RSTD measurement, then UE is not expected to receive PDSCH/CSI-RS from a certain [band or CC] but is expected to receive PDCCH and URLLC PDSCH from a certain [band or CC] on all symbols within PRS processing window.

If Cap. 2 UE capable of supporting priority options 1,2, and 3 is configured with priority state 1 for PRS RSTD measurement, then the UE is not expected to receive PDCCH/PDSCH/CSI-RS on the symbols overlapped with DL PRS within PRS processing window.

If Cap. 2 UE capable of supporting priority option 2 is configured with priority state 2 for PRS RSTD measurement, then UE is not expected to receive PDSCH/CSI-RS on the symbols overlapped with DL PRS within PRS processing window but is expected to receive PDCCH and URLLC PDSCH on the symbols overlapped with DL PRS within PRS processing window.

When PRS is lower priority than the DL signals/channels the following applies for cap1A and 1B UEs:

- If UE determines the presence of other DL signals/channels except SSB of higher priority than PRS in the PPW no later than N_2 symbols, defined in clause 6.4 of [26, TS38.214] for the subcarrier spacing μ of the DL PRS, before the start of the PPW, UE expects to receive the DL signals/channels and drop all DL PRS in the PPW.

- If UE determines the presence of other DL signals/channels except SSB of higher priority than PRS in the PPW later than N_2 symbols, defined in clause 6.4 of [26, TS38.214] for the subcarrier spacing μ of the DL PRS, before the start of the PPW, UE is not required to receive the other DL signals/channels except SSB of higher priority and may receive the DL PRS in the PPW.

When PRS is lower priority than the DL signals/channels the following applies for cap 2 UEs:

- If UE determines the presence of other DL signals/channels except SSB of higher priority than PRS on a PRS symbol no later than N_2 symbols, defined in clause 6.4 of [26, TS38.214] for the subcarrier spacing μ of the DL PRS, before the PRS symbol, UE expects to receive the DL signals/channels and drop the PRS symbol.

- If UE determines the presence of other DL signals/channels except SSB of higher priority than PRS on a PRS symbol later than N_2 symbols, defined in clause 6.4 of [26, TS38.214] for the subcarrier spacing μ of the DL PRS, before the PRS symbol, UE is not required to receive the other DL signals/channels except SSB of higher priority and may receive the PRS symbol.

For inter-band case for FR2 for the DL signals/channels from a different FR2 band than the FR2 band of the DL PRS, if the same Rx beam is used for both FR2 bands and the DL PRS is determined to be higher priority, capability 1B and 2 UEs are not expected to receive the DL signals/channels.

9.9.2 RSTD measurements

9.9.2.1 Introduction

The requirements in clause 9.9.2 shall apply provided the UE has received *NR-DL-TDOA-RequestLocationInformation* message from LMF via LPP [34] requesting the UE to measure and report DL RSTD measurements defined in TS 38.215 [4].

9.9.2.2 Requirements Applicability

The requirements in clause 9.9.2 apply for periodic and triggered RSTD measurements, provided:

- PRS-RSTD related side conditions given in clause 10.1.23 for FR1 and FR2 are fulfilled, for a corresponding Band.

9.9.2.3 Measurement Capability

UE PRS RSTD measurement capability is as indicated by the UE in *NR-DL-TDOA-ProvideCapabilities*, according to TS 37.355[34].

9.9.2.4 Measurement Reporting Requirements

The measurement reporting delay is defined as the time between the moment when the periodic measurement report is triggered and the moment when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other LPP signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: 2 x TTI_{DCCH} where TTI_{DCCH} is the duration of subframe or slot or subslot when the measurement report is transmitted on the PUSCH with subframe or slot or subslot duration. This measurement reporting delay excludes any delay caused by no UL resources for UE to send the measurement report.

The reported RSTD measurement values contained in measurement reports shall be based on the measurement report mapping requirements specified in clauses 10.1.23.3.

The RSTD measurements performed and reported according to this section shall meet the RSTD measurement accuracy requirements in clause 10.1.23, for each measured DL PRS resource.

9.9.2.4.1 Void

9.9.2.4.2 Void

9.9.2.4.3 Void

9.9.2.5 Measurements Period Requirements

When physical layer receives last of *NR-TDOA-ProvideAssistanceData* message and *NR-TDOA-RequestLocationInformation* message from LMF via LPP [34], the UE shall be able to measure multiple (up to the UE capability specified in Clause 9.9.2.3) DL RSTD measurements, defined in TS 38.215 [4], during the measurement period $T_{RSTD,Total}$ defined as:

$$\mathrm{T_{RSTD,Total}} = \sum_{\mathrm{i=1}}^{\mathrm{L}} \mathrm{T_{RSTD,i}} + \ (\mathrm{L}-1) * \max\left(\mathrm{T_{effect,i}}\right)$$

Where ,

i is the index of positioning frequency layer,

L is total number of positioning frequency layers, and

$\mathrm{T_{effect},i}$ is the periodicity of the PRS RSTD measurement in positioning frequency layer i

$\mathrm{T_{RSTD,i}}$ is the measurement period for PRS RSTD measurement in positioning frequency layer *i* as specified below:

$$\mathrm{T_{RSTD,i}} = \left(k_{multiTEG,i} * \mathrm{CSSF_{PRS,i}} * \mathrm{ceil}(\mathrm{K_{p,PRS,i}}) * N_{RxBeam,i} * \left\lceil \frac{N_{PRS,i}^{slot}}{N'} \right\rceil \left\lceil \frac{L_{available_PRS,i}}{N} \right\rceil * N_{sample} - 1\right) * \mathrm{T_{effect,i}} + \mathrm{T_{last,i}}$$

,

where:

$N_{RxBeam,i}$ is the UE Rx beam sweeping factor. In FR1, $N_{RxBeam,i}$ = 1;

and in FR2, $N_{RxBeam,i}$ is equal to the value reported by the UE in *supportedLowerRxBeamSweepingFactor-FR2* if the UE supports the capability for the band containing positioning frequency layer i, and the LMF indicates *lowerRxBeamSweepingFactor-FR2* in *NR-TDOA-RequestLocationInformation*. $N_{RxBeam,i}$ is equal to 8, otherwise.

$CSSF_{PRS,i}$ is the carrier-specific scaling factor for NR PRS-based positioning measurements in positioning frequency layer i as defined in clause 9.1.5.2.

$k_{multiTEG,i}$ is the scaling factor for measurement of same PRS resource with multiple Rx TEGs.

$k_{multiTEG,i}$=1 if UE is not requested by LMF to measure a PRS resource with multiple Rx TEGs via *measureSameDL-PRS-ResourceWithDifferentRxTEGs-r17* [34] in *NR-DL-TDOA-RequestLocationInformation*;

otherwise,

$k_{multiTEG}$=$N_{TEG,i}$, if UE is not capable of receiving same DL PRS resource simultaneously from multiple Rx TEGs, and

$k_{multiTEG}$=$\left\lceil \frac{N_{TEG,i}}{k_{TEG,simul,i}} \right\rceil$ if UE is capable of receiving the same DL PRS resource simultaneously from multiple Rx TEGs.

where

$N_{TEG,i}$ is the number of Rx TEGs with which UE is requested to measure a PRS resource indicated via *measureSameDL-PRS-ResourceWithDifferentRxTEGs-r17* [34] in *NR-DL-TDOA-RequestLocationInformation*, and in case 'n0' is indicated, $N_{TEG,i}$ is the maximum number of Rx TEGs with which UE can support to measure the same PRS resource as reported in *NR-UE-TEG-Capability*, and

$k_{TEG,simul,i}$ is the number of Rx TEGs UE can measure simultaneously which is reported via *measureSameDL-PRS-ResourceWithDifferentRxTEGsSimul*.

$K_{p,PRS,i}$ is a scaling factor for a positioning frequency layer to be measured within the associated measurement gap pattern, which is defined as $K_{p,PRS,i} = N_{total} / N_{available}$ for UE configured with concurrent measurement gap, and $K_{p,PRS,i} = 1$ for UE not configured with concurrent measurement gap.

- For a window W of duration max($T_{PRS,i}$, MGRP_max), where MGRP max is the maximum MGRP across all configured per-UE MG and per-FR MG within the same FR as the positioining frequency layer, and starting at the beginning of any associated gap occasions covering the PRS occasion:
  - N_{total} is the total number of associated gap occasions covering PRS occasions within the window, including those overlapped with other MG occasions within the window, and
  - $N_{available}$ is the number of non-dropped associated gap occasions covering PRS occasions within the window W, after further accounting for MG collisions by applying the selected gap collision rule
  - Requirements do not apply if $N_{available}$ =0.

$N_{PRS,i}^{slot}$ is the maximum number of DL PRS resources in positioning frequency layer *i* configured in a slot.

$L_{available_PRS,i}$ is the time duration of available PRS in the positioning frequency layer i to be measured during $T_{available_PRS,i}$, and is calculated in the same way as PRS duration K defined in clause 5.1.6.5 of TS 38.214 [26]. For calculation of $L_{available_PRS,i}$, only the PRS resources unmuted and fully or partially overlapped with MG are considered.

N_{sample} is the number of PRS RSTD measurement samples, where

- N_{sample} = 1 if the UE supports *supportedDL-PRS-ProcessingSamples* [34], and the LMF requests the UE to perform positioning measurements with reduced number of samples, and meets the following conditions:
  - PRS bandwidth is within the active BWP and
  - Magnitude of difference between the serving cell's SS-RSRP and the neighbor cell's PRS-RSRP is within [6] dB.
- N_{sample} = [2] if the UE supports *supportedDL-PRS-ProcessingSamples* [34], and the LMF requests the UE to perform positioning measurements with reduced number of samples, and does not meet the following conditions:
  - PRS bandwidth is within the active BWP and

- Magnitude of difference between the serving cell's SS-RSRP and the neighbor cell's PRS-RSRP is within [6] dB.

- N_{sample} = 4 otherwise.

$T_{last,i}$ is the measurement duration for the last PRS RSTD sample in positioning frequency layer *i*, including the

sampling time and processing time. If all of the PRS resources to be measured are available in the same MG occasion during $T_{availabe}$, $T_{last,i} = T_i$ +MGL. Otherwise, $T_{last,i} = T_i + T_{available_PRS,i}$,

$T_{effect,i}$ is the periodicity of the PRS RSTD measurement in positioning frequency layer i defined as:

$$T_{effect,i} = \left\lceil \frac{T_i}{T_{available_PRS,i}} \right\rceil * T_{available_PRS,i}$$

Where,

T_i corresponds to *durationOfPRS-ProcessingSymbolsInEveryTms* in TS 37.355 [34],

$T_{available_PRS,i} = LCM(T_{PRS,i}, MGRP_i)$, the least common multiple between $T_{PRS,i}$ and $MGRP_i$.

$MGRP_i$ is the repetition periodicity of the measurement gap applicable for measurement in the PRS frequency layer i.$T_{PRS,i}$ is the periodicity of DL PRS resource with muting on positioning frequency layer *i*.

If more than one PRS periodicities are configured in positioning frequency layer *i*, the least common multiple of PRS periodicities $T_{per}^{PRS\ with\ muting}$ among all DL PRS resource sets in the positioning frequency layer is used to derive $T_{PRS,i}$, where,

$T_{per}^{PRS\ with\ muting} = N_{muting} * T_{per}^{PRS}$, is the PRS periodicity with muting per PRS resource,

T_{per}^{PRS} is the periodicity of PRS resource sets given by the higher-layer parameter *DL-PRS-Periodicity*.

N_{muting} is the scaling factor considering PRS resource muting. $N_{muting} = T_{muting}^{PRS} * L_{muting}$, where

T_{muting}^{PRS} is the muting repetition factor given by the higher-layer parameter *DL-PRS-MutingBitRepetitionFactor*, and L_{muting} is the size of the bitmap $\{b^1\}$.

- Note: For the purpose of calculating $T_{PRS,i}$, only the PRS resources fully or partially covered by the MG are considered.

$\{N, T\}$ is UE capability combination per band where N is a duration of DL PRS symbols in ms corresponding to *durationOfPRS-ProcessingSysmbols* in TS 37.355 [34] processed every T ms corresponding to *durationOfPRS-ProcessingSymbolsInEveryTms* in TS 37.355 [34] for a given maximum bandwidth supported by UE corresponding to *supportedBandwidthPRS* in TS 37.355 [34].

N' is UE capability for number of DL PRS resources that it can process in a slot as indicated by *maxNumOfDL-PRS-ResProcessedPerSlot* specified in TS 37.355 [34].

Except for deferred MT-LR as defined in clause 4.1a.5 [TS 23.273], the time $T_{RSTD,Total}$ starts from the first MG instance aligned with a DL PRS resource(s) in the assistance data after both the *NR-TDOA-ProvideAssistanceData* message and *NR-TDOA-RequestLocationInformation* message are delivered from LMF to the physical layer of UE via LPP [34].

For deferred MT-LR with other event than "Periodic Location" as defined in clause 4.1a.5.1 [TS 23.273], the time $T_{RSTD,Total}$ starts from the first MG instance aligned with a DL PRS resource(s) in the assistance data after the associated event(s) occurs.

For deferred MT-LR with event "Periodic Location" as defined in clause 4.1a.5.1 [TS 23.273], the UE shall perform the RSTD measurement in each reporting period and activate the location report at the time when the periodic timer expires.

Note: No per-positioning frequency layer requirement is applied in scenarios when multiple positioning frequency layers are configured.

If during the measurement period of one or more positioning frequency layers, the MG pattern is reconfigured, the measurement period can be longer. When PRS-RSRP is configured for DL-TDOA, RSTD and RSRP are performed over the same measurement period.

The measurement requirements in this clause apply, provided no PRS symbols are dropped during the measurement period $T_{RSTD,Total}$ within measurement gaps due to collisions with other signals; otherwise, the measurement period can be longer.

If CSSF changes during the measurement period, the measurement period could be longer.

The measurement requirements do not apply for a PRS resource, if the PRS resource is across two sampling duration of N within duration $L_{available_PRS,i}$.

The measurement requirements do not apply for a PRS resource, if time span of the PRS resource instance (including at least the minimum number of repetitions specified in the accuracy requirements) is greater than UE reported capability N.

The requirements in clause 9.9.2 do not apply if the PRS configuration given by higher layer paramters *NR-DL-PRS-AssistanceData* exceeds any of the UE measurement capabilities given by *NR-DL-PRS-ResourcesCapability* in *NR-DL-TDOA-ProvideCapabilities*, and it is up to UE implementation which PRS resources are measured, subject to UE measurement capabilities.

If handover occurs while RSTD measurements are being performed, then the UE shall continue and complete the on-going RSTD measurements. The RSTD measurement period can be longer. The UE shall meet the RSTD measurement accuracy requirements in clause 10.1.23.

9.9.2.6 Void

9.9.2.7 Measurements Period Requirements without Measurement Gaps

When physical layer receives last of *NR-TDOA-ProvideAssistanceData* message and *NR-TDOA-RequestLocationInformation* message from LMF via LPP [34], the UE shall be able to measure multiple (up to the UE capability specified in Clause 9.9.2.3) DL RSTD measurements, defined in TS 38.215 [4], during the measurement period $T_{RSTD,Total}$ defined as:

$T_{RSTD,Total} = \sum_{i=1}^{L} T_{RSTD_wo_gap,i} + (L-1) * \max(T_{effect,i})$, if any of the positioning frequency layers are in Case 1, or

$T_{RSTD,Total} = \max(T_{RSTD_wo_gap,i} + T_{uncertainty,i})$, if all the positioning frequency layers are in Case 2,

Where,

i is the index of positioning frequency layer, and

L is total number of positioning frequency layers, and

$T_{effect,i}$ is the periodicity of the PRS RSTD measurement in positioning frequency layer i, and

$T_{uncertainty,i}$ is the time from the start of the first PPW occasion for positioning frequency layer i to the start of measurement period $T_{RSTD,Total}$.

A positioning frequency layer is in Case 1 if UE reports *ppw-durationOfPRS-Processing1-r17* for the band containing the positioning frequency layer, and a positioning frequency layer is in Case 2 if UE reports *ppw-durationOfPRS-Processing2-r17* for the band containing the positioning frequency layer.

$T_{RSTD_wo_gap,i}$ is the measurement period for PRS RSTD measurement in positioning frequency layer i as specified below.

$$T_{RSTD_wo_gap,i} = \left(k_{multiTEG,i} * N_{RxBeam,i} * \left\lceil \frac{N_{PRS,i}^{slot}}{N'} \right\rceil \left\lceil \frac{L_{available_PRS,i}}{N} \right\rceil * N_{sample} - 1\right) * T_{effect,i} + T_{last,i},$$

where:

$N_{RxBeam,i}$ is the UE Rx beam sweeping factor. In FR1, $N_{RxBeam,i}$ = 1; and in FR2,$N_{RxBeam,i}$ is equal to the value reported by the UE in *supportedLowerRxBeamSweepingFactor-FR2* if the UE supports the capability for the band containing positioning frequency layer i, and the LMF indicates *lowerRxBeamSweepingFactor-FR2* in *NR-TDOA-RequestLocationInformation*. $N_{RxBeam,i}$ is equal to 8, otherwise.

$k_{multiTEG,i}$ is the scaling factor for measurement of same PRS resource with multiple Rx TEGs.

$k_{multiTEG,i}$=1 if UE is not supported *measureSameDL-PRS-ResourceWithDifferentRxTEGs-r17* or not requested by LMF to measure a PRS resource with multiple Rx TEGs via *measureSameDL-PRS-ResourceWithDifferentRxTEGs-r17* [34] in *NR-DL-TDOA-RequestLocationInformation*;

otherwise,

$k_{multiTEG}$=$N_{TEG,i}$, if the UE is not capable of receiving same DL PRS resource simultaneously from multiple Rx TEGs, and

$k_{multiTEG}$=$\left\lceil \frac{N_{TEG,i}}{k_{TEG,simul,i}} \right\rceil$ if the UE is capable of receiving the same DL PRS resource simultaneously from multiple Rx TEGs.

where

$N_{TEG,i}$ is the number of Rx TEGs with which UE is requested to measure a PRS resource indicated via *measureSameDL-PRS-ResourceWithDifferentRxTEGs-r17* [34] in *NR-DL-TDOA-RequestLocationInformation*, and in case 'n0' is indicated, $N_{TEG,i}$ is the maximum number of Rx TEGs with which UE can support to measure the same PRS resource as reported in *NR-UE-TEG-Capability*, and

$k_{TEG,simul,i}$ is the number of Rx TEGs UE can measure simultaneously which is reported via *measureSameDL-PRS-ResourceWithDifferentRxTEGsSimul*.

$N_{PRS,i}^{slot}$ is the maximum number of DL PRS resources in positioning frequency layer *i* configured in a slot.

$L_{available_PRS,i}$ is the time duration of available PRS in the positioning frequency layer i to be measured during $T_{available_PRS,i}$, and is calculated in the same way as PRS duration K defined in clause 5.1.6.5 of TS 38.214 [26]. For calculation of $L_{available_PRS,i}$,

only the PRS resources unmuted and fully or partially overlapped with PPW are considered, if positioning frequency layer i is in Case 1, or

only the PRS resources unmuted and fully or partially overlapped with the first (PPWL-T2) ms of PPW are considered, if positioning frequency layer i is in Case 2, where PPWL is the PPW length and T2 corresponds to *ppw-durationOfPRS-ProcessingSymbolsT2*.

N_{sample} is the number of PRS RSTD measurement samples, where

- N_{sample}= 1 if the UE supports *supportedDL-PRS-ProcessingSamples* [34], and the LMF requests the UE to perform positioning measurements with reduced number of samples, and meets the following conditions:
  - PRS bandwidth is within the active BWP and
  - Magnitude of difference between the serving cell's SS-RSRP and the neighbor cell's PRS-RSRP is within [6] dB.
- N_{sample}= [2] if the UE supports *supportedDL-PRS-ProcessingSamples* [34], and the LMF requests the UE to perform positioning measurements with reduced number of samples, and does not meet the following conditions:
  - PRS bandwidth is within the active BWP and
  - Magnitude of difference between the serving cell's SS-RSRP and the neighbor cell's PRS-RSRP is within [6] dB.
- N_{sample}= 4 otherwise.

$T_{last,i}$ is the measurement duration for the last PRS RSTD sample in positioning frequency layer *i*, including the sampling time and processing time.

If positioning frequency layer *i* is in Case 1 and all of the PRS resources to be measured are available in the same PPW occasion during $T_{available}$, then $T_{last,i} = T_i$ +PPWL, else

if positioning frequency layer *i* is in Case 2 and all of the PRS resources to be measured are available in the same PPW occasion during $T_{available}$, then $T_{last,i}$ = PPWL;

otherwise, $T_{last,i} = T_i + T_{available_PRS,i}$.

$T_{effect,i}$ is the periodicity of the PRS RSTD measurement in positioning frequency layer i defined as:

$$T_{effect,i} = \left\lceil \frac{T_i}{T_{available_PRS,i}} \right\rceil * T_{available_PRS,i}$$

Where,

T_i corresponds to *ppw-durationOfPRS-ProcessingSymbolsT* in TS 37.355 [34] if positioning frequency layer *i* is in Case 1, or corresponds to the sum of *ppw-durationOfPRS-ProcessingSymbolsT2* and *ppw*-durationOfPRS-*ProcessingSymbolsN2* in TS 37.355 [34] if positioning frequency layer *i* is in Case 2,

$T_{available_PRS,i} = LCM(T_{PRS,i}, PPWRP_i)$, the least common multiple between $T_{PRS,i}$ and $PPWRP_i$.

$PPWRP_i$ is the repetition periodicity of the PRS processing window applicable for measurements in the positioning frequency layer *i*.

$T_{PRS,i}$ is the periodicity of DL PRS resource with muting on positioning frequency layer *i*.

If more than one PRS periodicities are configured in positioning frequency layer *i*, the least common multiple of PRS periodicities $T_{per}^{PRS\ with\ muting}$ among all DL PRS resource sets in the positioning frequency layer is used to derive $T_{PRS,i}$, where,

$T_{per}^{PRS\ with\ muting} = N_{muting} * T_{per}^{PRS}$, is the PRS periodicity with muting per PRS resource,

T_{per}^{PRS} is the periodicity of PRS resource sets given by the higher-layer parameter *DL-PRS-Periodicity*,

N_{muting} is the scaling factor considering PRS resource muting. $N_{muting} = T_{muting}^{PRS} * L_{muting}$, where T_{muting}^{PRS} is the muting repetition factor given by the higher-layer parameter *DL-PRS-MutingBitRepetitionFactor*, and L_{muting} is the size of the bitmap $\{b^1\}$.

Note: For the purpose of calculating $T_{PRS,i}$, only the PRS resources that meet the conditions for PRS measurement outside measurement gaps as defined in clause 9.9.1.2 are considered.

N is a duration of DL PRS symbols in ms corresponding to *ppw-durationOfPRS-ProcessingSymbolsN* in TS 37.355 [34] if positioning frequency layer i is in Case 1, or corresponding to *ppw-durationOfPRS-ProcessingSymbolsN2* in TS 37.355 [34] if positioning frequency layer i is in Case 2.

N' is UE capability for number of DL PRS resources that it can process in a slot as indicated by *ppw-maxNumOfDL-PRS-ResProcessedPerSlot* specified in TS 37.355 [34].

The time $T_{RSTD_wo_gap,i}$ starts from the first instance of the activated PPW for measurement of positioning frequency layer *i* aligned with a DL PRS resource(s) in the assistance data after both the *NR-TDOA-ProvideAssistanceData* message and *NR-TDOA-RequestLocationInformation* message are delivered from LMF to the physical layer of UE via LPP [34].

If during the measurement period of one or more positioning frequency layers, the PPW is re-configured or reactivated, the measurement period can be longer. When PRS-RSRP is configured for DL-TDOA, RSTD and RSRP are performed over the same measurement period.

The measurement requirements in this clause apply, provided no PRS symbols are dropped during the measurement period $T_{RSTD_wo_gap,i}$ within PPW due to collisions with other signals; otherwise, the measurement period can be longer.

The measurement requirements do not apply for a PRS resource, if the PRS resource is across two sampling duration of N within duration $L_{available_PRS,i}$.

The measurement requirements do not apply for a PRS resource, if time span of the PRS resource instance (including at least the minimum number of repetitions specified in the accuracy requirements) is greater than UE reported capability N.

The requirements in clause 9.9.2 do not apply if the PRS configuration given by higher layer paramters *NR-DL-PRS-AssistanceData* exceeds any of the UE measurement capabilities given by *NR-DL-PRS-ResourcesCapability* in *NR-DL-TDOA-ProvideCapabilities*, and it is up to UE implementation which PRS resources are measured, subject to UE measurement capabilities.

If handover occurs while RSTD measurements are being performed, then the UE shall continue and complete the on-going RSTD measurements. The RSTD measurement period can be longer. The UE shall meet the RSTD measurement accuracy requirements in clause 10.1.23.

If any positioning frequency layer is in Case 2, the requirements in this clause apply provided that the PPWL corresponding to the positioning frequency layer is larger than (T2+X) ms.

The requirements in this clause apply provided that a single positioning frequency layer is configured for measurement in each PPW.

9.9.2.8 Void

9.9.2.9 Measurements Period Requirements with both MG and PPW

If the UE is configured with both MG applicable to positioning measurement and PPW, the UE shall measure positioning frequency layer *i* within

- MG, if PRS resources on positioning frequency layer *i* are overlapped with MG, or
- PPW, if PRS resources on positioning frequency layer *i* are overlapped with PPW.

The measurement period $T_{RSTD,Total}$ is defined as:

$$T_{RSTD,Total} = T_{RSTD,Total,MG} + T_{RSTD,Total,PPW} + T_{guard},$$

Where

- $T_{RSTD,Total,MG}$ is defined in clause 9.9.2.5 and includes all positioning frequency layers to be measured within MG,
- $T_{RSTD,Total,PPW}$ is defined in clause 9.9.2.7 and includes all positioning frequency layers to be measured within PPW,
- T_{guard} is the maximum T_{effect} defined in clauses 9.9.2.5 and 9.9.2.7 among all PFLs.

The requirements apply provided the following conditions are satisfied:

- MGs and PPWs do not overlap in time;
- Each PFL in the assistance data can be measured completely (all PRS resources) either within MG or within activated PPW.

9.9.3 PRS-RSRP measurements

9.9.3.1 Introduction

The requirements in clause 9.9.3.5 shall apply provided the UE has received a message from LMF via LPP [34] requesting the UE to measure and report PRS-RSRP measurements defined in TS 38.215 [4].

9.9.3.2 Requirements applicability

The requirements in clause 9.9.3 apply for periodic and triggered PRS-RSRP measurements, provided:

- PRS-RSRP related side conditions given in clause 10.1.24 are met for a corresponding Band.

9.9.3.3 Measurement Capability

UE PRS-RSRP measurement capability is as indicated by the UE in *NR-DL-AoD-ProvideCapabilities* according to TS 37.355 [34].

9.9.3.4 Measurement Reporting Requirements

This requirement assumes that the measurement report is not delayed by other LPP signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: 2 x TTI_{DCCH} where TTI_{DCCH} is the duration of subframe or slot or subslot when the measurement report is transmitted on the PUSCH with subframe or slot or subslot duration. This measurement reporting delay excludes any delay caused by no UL resources for UE to send the measurement report.

The reported PRS-RSRP measurement values contained in measurement reports shall be based on the measurement report mapping requirements specified in clauses 10.1.24.3.

The PRS-RSRP measurement accuracy for all measured PRS resources shall be fulfilled according to the accuracy requriements specified in the clauses 10.1.24.

9.9.3.5 Measurement Period Requirements

When the physical layer receives *NR-DL-AoD-ProvideAssistanceData* message and *NR-DL-AoD-RequestLocationInformation* message from LMF via LPP [34], the UE shall be able to measure multiple (up to the UE capability specified in Clause 9.9.3.3) PRS-RSRP measurements, defined in TS 38.215 [4], from configured PRS resources for configured TRPs on configured positioning frequency layers, within $T_{PRS-RSRP,total}$ ms.

$$T_{PRS-RSRP,\,total} = \sum_{i=1}^{L} T_{PRS-RSRP,i} + (L-1) * \max\left(T_{effect,i}\right)$$

where

i is the index of positioning frequency layer,

L is total number of positioning frequency layers,

$T_{effect,i}$ is the periodicity of the PRS-RSRP measurement in positioning frequency layer *i*.

$$T_{PRS-RSRP,i} = \left(CSSF_i * \text{ceil}(K_{p,PRS,i}) * N_{RxBeam,i} * \left\lceil \frac{N_{PRS,i}^{slot}}{N'} \right\rceil \left\lceil \frac{L_{available_PRS,i}}{N} \right\rceil * N_{sample} - 1\right) * T_{effect,i} + T_{last}$$

where

$CSSF_i$ is the carrier specific scaling factor for PRS-RSRP measurements specified in clause 9.1.5.2,

$K_{p,PRS,i}$ is a scaling factor for a positioning frequency layer to be measured within the associated measurement gap pattern, which is defined as $K_{p,PRS,i} = N_{total} / N_{available}$ for UE configured with concurrent measurement gap, and $K_{p,PRS,i} = 1$ for UE not configured with concurrent measurement gap.

For a window W of duration max($T_{PRS,i}$, MGRP_max), where MGRP max is the maximum MGRP across all configured per-UE MG and per-FR MG within the same FR as the positioining frequency layer, and starting at the beginning of any associated gap occasions covering the PRS occasion:

N_{total} is the total number of associated gap occasions covering PRS occasions within the window, including those overlapped with other MG occasions within the window, and

$N_{available}$ is the number of non-dropped associated gap occasions covering PRS occasions within the window W, after further accounting for MG collisions by applying the selected gap collision rule

Requirements do not apply if $N_{available}$ =0.

$N_{RxBeam,i}$ is the scaling factor for Rx beam sweeping, and $N_{RxBeam,i}$=1 if positioning frequency layer *i* is in FR1 and if positioning frequency layer *i* is in FR2, $N_{RxBeam,i}$ is equal to the value reported by the UE in *supportedLowerRxBeamSweepingFactor-FR2* if the UE supports the capability for the band containing positioning frequency layer i, and the LMF indicates *lowerRxBeamSweepingFactor-FR2* in *NR-TDOA-RequestLocationInformation*. $N_{RxBeam,i}$ is equal to 8, otherwise.

$L_{available_PRS,i}$ is the time duration of available PRS to be measured in the positioning frequency layer i to be measured during $T_{available_PRS,i}$, and is calculated in the same way as PRS duration K defined in clause 5.1.6.5 of TS 38.214 [26]. For calculation of $L_{available_PRS,i}$, only the PRS resources unmuted and fully or partially overlapped with MG are considered.

$N_{PRS,i}^{slot}$ is the maximum number of DL PRS resources of positioning frequency layer i configured in a slot,

{N, T} is UE capability combination per band where N is a duration of DL PRS symbols in ms corresponding to *durationOfPRS-ProcessingSysmbols* in TS 37.355 [34] processed every T ms corresponding to *durationOfPRS-ProcessingSymbolsInEveryTms* in TS 37.355 [34] for a given maximum bandwidth supported by UE corresponding to *supportedBandwidthPRS* in TS 37.355 [34],

N′ is UE capability for number of DL PRS resources that it can process in a slot as indicated by *maxNumOfDL-PRS-ResProcessedPerSlot* in clause 6.4.3 of TS 37.355 [34],

N_{sample} is the number of PRS RSRP measurement samples, where

- N_{sample} = 1 if the UE supports *supportedDL-PRS-ProcessingSamples* [34], and the LMF requests the UE to perform positioning measurements with reduced number of samples, and meets the following conditions:
  - PRS bandwidth is within the active BWP and
  - Magnitude of difference between the serving cell's SS-RSRP and the neighbor cell's PRS-RSRP is within [6] dB.
- N_{sample} = [2] if the UE supports *supportedDL-PRS-ProcessingSamples* [34], and the LMF requests the UE to perform positioning measurements with reduced number of samples, and does not meet the following conditions:
  - PRS bandwidth is within the active BWP and
  - Magnitude of difference between the serving cell's SS-RSRP and the neighbor cell's PRS-RSRP is within [6] dB.
- N_{sample} = 4 otherwise.

$T_{last,i} = T_i + T_{available_PRS,i}$ is the measurement duration for the last PRS-RSRP sample, including the sampling time and processing time, if not all PRS resources to be measured are available in the same measurement gap occasion during $T_{available_PRS,i}$, otherwise $T_{last,i} = T_i + MGL$,

$T_{effect,i} = \left\lceil \frac{T_i}{T_{available_PRS,i}} \right\rceil * T_{available_PRS,i}$ is the periodicity of PRS-RSRP measurement in positioning frequency layer *i*,

T_i corresponds to durationOfPRS-ProcessingSymbolsInEveryTms in TS 37.355 [34],

$T_{available_PRS,\mathrm{i}} = LCM(T_{PRS,\mathrm{i}}, MGRP_{\mathrm{i}})$ is the least common multiple between $T_{PRS,\mathrm{i}}$ and $MGRP_{\mathrm{i}}$,

$T_{\mathrm{PRS,i}}$ is the maximum PRS resource periodicity among all PRS resources in positioning frequency layer i,

$MGRP_{\mathrm{i}}$ is the measurement gap repetition period in positioning frequency layer i.

If positioning frequency layer *i* has more than one DL PRS resource set with different PRS periodicities with muting, $T_{per}^{PRS\ with\ muting} = N_{muting} * T_{per}^{PRS}$, the least common multiple of $T_{per}^{PRS\ with\ muting}$ among the DL PRS resource sets is used to derive $T_{\mathrm{PRS,i}}$, where:

T_{per}^{PRS} is the periodicity of PRS resource sets given by the higher-layer parameter *DL-PRS-Periodicity*.

N_{muting} is the scaling factor considering PRS resource muting. $N_{muting} = T_{muting}^{PRS} * L_{muting}$, where T_{muting}^{PRS} is the muting repetition factor given by the higher-layer parameter *DL-PRS-MutingBitRepetitionFactor*, and L_{muting} is the size of the bitmap $\{b^1\}$.

Note: For the purpose of calculating $T_{\mathrm{PRS,i}}$, only the PRS resources fully or partially covered by the MG are considered.

When PRS-RSRP measurements are configured for DL-AoD, except for deferred MT-LR as defined in clause 4.1a.5 [TS 23.273], the time $T_{\mathrm{PRS-RSRP,total}}$ starts from the first MG instance aligned with DL PRS resources in the assistance data after both the *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message from LMF via LPP [34] are delivered to the physical layer of UE.

For deferred MT-LR with other event than "Periodic Location" as defined in clause 4.1a.5.1 [TS 23.273], the time $T_{PRS-RSRP,total}$ starts from the first MG instance aligned with a DL PRS resource(s) in the assistance data after the associated event(s) occurs.

For deferred MT-LR with event "Periodic Location" as defined in clause 4.1a.5.1 [TS 23.273], the UE shall perform the PRS-RSRP measurement in each reporting period and activate the location report at the time when the periodic timer expires.

Note: No per-positioning frequency layer requirement is applied in scenarios when multiple positioning frequency layers are configured.

When the PRS-RSRP measurement is configured together with RSTD measurement then the PRS-RSRP measurement shall meet the RSTD measurement requirements defined in clause 9.9.2.

When the PRS-RSRP measurement is configured together with UE Rx-Tx time difference measurement then the PRS-RSRP measurement shall meet the UE Rx-Tx time difference measurement requirements defined in clause 9.9.4.

If CSSF changes during the measurement period, the measurement period could be longer.

The measurement requirements do not apply for a PRS resource:

– if the PRS resource is across two sampling duration of N within duration $L_{available_PRS,\mathrm{i}}$ or

– if time span of the PRS resource instance (including at least the minimum number of repetitions specified in the accuracy requirements) is greater than UE reported capability N.

If during the measurement period of one or more positioning frequency layers, the MG pattern is reconfigured either per UE request or not per UE request, the measurement period can be longer.

The requirements in this section apply, provided no PRS symbols are dropped during the measurement period $T_{\mathrm{PRS-RSRP,total}}$ within measurement gaps due to collisions with other signals; otherwise, a longer measurement period may be used.

The requirements in clause 9.9.3 do not apply if the PRS configuration given by higher layer paramters *NR-DL-PRS-AssistanceData* exceeds any of the UE measurement capabilities given by *NR-DL-PRS-ResourcesCapability* in *NR-DL-AoD-ProvideCapabilities*, and it is up to UE implementation which PRS resources are measured, subject to UE measurement capabilities.

If handover occurs while PRS-RSRP measurements are being performed then the UE shall complete the ongoing PRS-RSRP measurements session. The PRS-RSRP measurement period can be longer. The UE shall meet the PRS-RSRP measurement accuracy requirements in clause 10.1.24.

9.9.3.6 Measurement Period Requirements without Measurement Gaps

When the physical layer receives *NR-DL-AoD-ProvideAssistanceData* message and *NR-DL-AoD-RequestLocationInformation* message from LMF via LPP [34], the UE shall be able to measure multiple (up to the UE capability specified in Clause 9.9.3.3) PRS-RSRP measurements as defined in TS 38.215 [4] without measurement gap, on configured positioning frequency layer *i*, within $T_{PRS-RSRP,total}$ ms.

$T_{PRS-RSRP,\ total} = \sum_{i=1}^{L} T_{PRS-RSRP,i} + (L-1) * \max(T_{effect,i})$ if any of the positioning frequency layers are in Case 1, or

$T_{PRS-RSRP,\ total} = \max(T_{PRS-RSRP,i} + T_{uncertainty,i})$, if all the positioning frequency layers are in Case 2,

Where,

i is the index of positioning frequency layer, and

L is total number of positioning frequency layers, and

$T_{effect,i}$ is the periodicity of the PRS RSTD measurement in positioning frequency layer i, and

$T_{uncertainty,i}$ is the time from the start of the first PPW occasion for positioning frequency layer i to the start of measurement period $T_{PRS-RSRP,\ total}$.

A positioning frequency layer is in Case 1 if UE reports *ppw-durationOfPRS-Processing1-r17* for the band containing the positioning frequency layer, and a positioning frequency layer is in Case 2 if UE reports *ppw-durationOfPRS-Processing2-r17* for the band containing the positioning frequency layer.

$T_{PRS-RSRP,i}$ is the measurement period for PRS-RSRP measurement in positioning frequency layer *i* as specified below.

$$T_{PRS-RSRP,i} = \left(N_{RxBeam,i} * \left\lceil \frac{N_{PRS,i}^{slot}}{N'} \right\rceil \left\lceil \frac{L_{available_PRS,i}}{N} \right\rceil * N_{sample} - 1\right) * T_{effect,i} + T_{last}$$

where

$T_{effect,i}$ is the periodicity of the PRS-RSRP measurement in positioning frequency layer *i*.

$N_{RxBeam,i}$ is the scaling factor for Rx beam sweeping, and $N_{RxBeam,i}$=1 if positioning frequency layer *i* is in FR1. If positioning frequency layer *i* is in FR2, $N_{RxBeam,i}$ is equal to the value reported by the UE in *supportedLowerRxBeamSweepingFactor-FR2* if the UE supports the capability for the band containing positioning frequency layer i, and the LMF indicates *lowerRxBeamSweepingFactor-FR2* in *NR-TDOA-RequestLocationInformation*. $N_{RxBeam,i}$ is equal to 8, otherwise.

$L_{available_PRS,i}$ is the time duration of available PRS to be measured in the positioning frequency layer i to be measured during $T_{available_PRS,i}$, and is calculated in the same way as PRS duration K defined in clause 5.1.6.5 of TS 38.214 [26]. For calculation of $L_{available_PRS,i}$,

only unmuted PRS resource instances that meet the applicability conditions and fully or partially overlapped with PRS processing window are considered, if positioning frequency layer i is in Case 1, or

only the PRS resources unmuted and fully or partially overlapped with the first (PPWL-T2) ms of PPW are considered, if positioning frequency layer i is in Case 2, where PPWL is the PPW length and T2 corresponds to *ppw-durationOfPRS-ProcessingSymbolsT2*.

$N_{PRS,i}^{slot}$ is the maximum number of DL PRS resources of positioning frequency layer i configured in a slot,

{N, T} is UE capability combination per band where N is a duration of DL PRS symbols in ms corresponding to *ppw-durationOfPRS-ProcessingSymbolsN* in TS 37.355 [34] if positioning frequency layer *i* is in Case 1, or corresponding to *ppw-durationOfPRS-ProcessingSymbolsN2* in TS 37.355 [34] if positioning frequency layer *i* is in Case 2,

N' is UE capability for number of DL PRS resources that it can process in a slot as indicated by *ppw-maxNumOfDL-PRS-ResProcessedPerSlot* in clause 6.4.3 of TS 37.355 [34],

N_{sample} is the number of PRS RSRP measurement samples, where

- N_{sample} = 1 if the UE supports *supportedDL-PRS-ProcessingSamples* [34], and the LMF requests the UE to perform positioning measurements with reduced number of samples, and meets the following conditions:
  - PRS bandwidth is within the active BWP and
  - Magnitude of difference between the serving cell's SS-RSRP and the neighbor cell's PRS-RSRP is within [6] dB.
- N_{sample} = [2] if the UE supports *supportedDL-PRS-ProcessingSamples* [34], and the LMF requests the UE to perform positioning measurements with reduced number of samples, and does not meet the following conditions:
  - PRS bandwidth is within the active BWP and
  - Magnitude of difference between the serving cell's SS-RSRP and the neighbor cell's PRS-RSRP is within [6] dB.
- N_{sample} = 4 otherwise.

T_{last} is the measurement duration for the last PRS-RSRP sample, including the sampling time and processing time.

If positioning frequency layer *i* is in Case 1 and all of the PRS resources to be measured are available in the same PPW occasion during $T_{available}$, then $T_{last,i} = T_i$ +PPWL, else

if positioning frequency layer *i* is in Case 2 and all of the PRS resources to be measured are available in the same PPW occasion during $T_{available}$, then $T_{last,i}$ = PPWL;

otherwise, $T_{last,i} = T_i + T_{available_PRS,i}$.

$T_{effect,i} = \left\lceil \frac{T_i}{T_{available_PRS,i}} \right\rceil * T_{available_PRS,i}$ is the periodicity of PRS-RSRP measurement in positioning frequency layer *i*,

T_i corresponds to *ppw-durationOfPRS-ProcessingSymbolsT* in TS 37.355 [34] if positioning frequency layer *i* is in Case 1, or corresponds to the sum of *ppw-durationOfPRS-ProcessingSymbolsT2* and *ppw-durationOfPRS-ProcessingSymbolsN2* in TS 37.355 [34] if positioning frequency layer *i* is in Case 2

$T_{available_PRS,i} = LCM(T_{PRS,i}, PPWRP_i)$ is the least common multiple between $T_{PRS,i}$ and $PPWRP_i$,

$T_{PRS,i}$ is the maximum PRS resource periodicity among all PRS resources in positioning frequency layer i,

$PPWRP_i$ is the PRS processing window repetition period in positioning frequency layer i.

If positioning frequency layer *i* has more than one DL PRS resource set with different PRS periodicities with muting, $T_{per}^{PRS\ with\ muting} = N_{muting} * T_{per}^{PRS}$, the least common multiple of $T_{per}^{PRS\ with\ muting}$ among the DL PRS resource sets is used to derive $T_{PRS,i}$, where:

T_{per}^{PRS} is the periodicity of PRS resource sets given by the higher-layer parameter *DL-PRS-Periodicity*.

N_{muting} is the scaling factor considering PRS resource muting. If bitmap $\{b^1\}$ for higher-layer parameter *DL-*
N_{muting} is the scaling factor considering PRS resource muting. $N_{muting} = T_{muting}^{PRS} * L_{muting}$, where T_{muting}^{PRS} is the muting repetition factor given by the higher-layer parameter *DL-PRS-MutingBitRepetitionFactor*, and L_{muting} is the size of the bitmap $\{b^1\}$.

Note: For the purpose of calculating $T_{PRS,i}$, only the PRS resources that meet the applicability conditions and fully or partially covered by the PRS processing window are considered.

When PRS-RSRP measurements are configured for DL-AoD, the time $T_{PRS-RSRP,i}$ starts from the first PRS processing window instance aligned with DL PRS resources in the assistance data after both the *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message from LMF via LPP [34] are delivered to the physical layer of UE.

Note: No per-positioning frequency layer requirement is applied in scenarios when multiple positioning frequency layers are configured.

When the PRS-RSRP measurement is configured together with RSTD measurement then the PRS-RSRP measurement shall meet the RSTD measurement requirements defined in clause 9.9.2.

When the PRS-RSRP measurement is configured together with UE Rx-Tx time difference measurement then the PRS-RSRP measurement shall meet the UE Rx-Tx time difference measurement requirements defined in clause 9.9.4.

If CSSF changes during the measurement period, the measurement period could be longer.

The measurement requirements do not apply for a PRS resource:

if the PRS resource is across two sampling duration of N within duration $L_{available_PRS,i}$ or

if time span of the PRS resource instance (including at least the minimum number of repetitions specified in the accuracy requirements) is greater than UE reported capability N.

The requirements in clause 9.9.3 do not apply if the PRS configuration given by higher layer paramters *NR-DL-PRS-AssistanceData* exceeds any of the UE measurement capabilities given by *NR-DL-PRS-ResourcesCapability* in *NR-DL-AoD-ProvideCapabilities*, and it is up to UE implementation which PRS resources are measured, subject to UE measurement capabilities.

If during the measurement period of one or more positioning frequency layers, the PPW is reconfigured or reactivated, the PRS-RSRP measurement period can be longer.

If any positioning frequency layer is in Case 2, the requirements in this clause apply provided that the PPWL corresponding to the positioning frequency layer is larger than (T2+X) ms.

The requirements in this clause apply provided that a single positioning frequency layer is configured for measurement in each PPW.

9.9.3.7 Void

9.9.3.8 Measurements Period Requirements with both MG and PPW

If the UE is configured with both MG applicable to positioning measurement and PPW, the UE shall measure positioning frequency layer *i* within

- MG, if PRS resources on positioning frequency layer *i* are overlapped with MG, or
- PPW, if PRS resources on positioning frequency layer *i* are overlapped with PPW.

The measurement period $T_{PRS-RSRP,\ total}$ is defined as:

$$T_{PRS-RSRP,\ total} = T_{PRS-RSRP,Total,MG} + T_{PRS-RSRP,Total,PPW} + T_{guard},$$

Where

- $T_{PRS-RSRP,Total,MG}$ is defined in clause 9.9.3.5 and includes all positioning frequency layers to be measured within MG,
- $T_{PRS-RSRP,Total,PPW}$ is defined in clause 9.9.3.6 and includes all positioning frequency layers to be measured within PPW,
- T_{guard} is the maximum T_{effect} defined in clauses 9.9.3.5 and 9.9.3.6 among all PFLs.

The requirements apply provided the following conditions are satisfied:

- MGs and PPWs do not overlap in time;
- Each PFL in the assistance data can be measured completely (all PRS resources) either within MG or within activated PPW.

9.9.4 UE Rx-Tx time difference measurements

9.9.4.1 Introduction

The requirements in this clause shall apply, provided the UE has received *nr-Multi-RTT-RequestLocationInformation* message from LMF via LPP [34] requesting the UE to measure and report one or more UE Rx-Tx time difference measurements defined in TS 38.215 [4].

9.9.4.2 Requirements Applicability

The requirements in clause 9.9.4 apply for periodic and triggered UE Rx-Tx time difference measurements, provided:

- UE Rx-Tx time difference measurement related side conditions given in clause 10.1.25 are met for a corresponding band.
- SRS is configured on at least one of the PCell, PSCell and SCell.
- The UE transmits SRS within [-160, 160] msec of at least one DL PRS resource of each of the TRPs in the assistance data.

9.9.4.3 Measurement Capability

UE Rx-Tx time difference measurement capability is as indicated by the UE in *NR-Multi-RTT-ProvideCapabilities,* according to TS 37.355 [34].

9.9.4.4 Measurement Reporting Requirements

This requirement assumes that the measurement report is not delayed by other LPP signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: 2 x TTIDCCH where TTIDCCH is the duration of subframe or slot or subslot when the measurement report is transmitted on the PUSCH with subframe or slot or subslot duration. This measurement reporting delay excludes any delay caused by no UL resources for UE to send the measurement report.

The UE Rx-Tx time difference measurement values contained in measurement reports shall be based on the measurement report mapping requirements specified in clause 10.1.25.

The UE Rx-Tx time difference measurement accuracy for all measured DL PRS resources shall be fulfilled according to the accuracy requirements specified in clause 10.1.25.

9.9.4.5 Measurement Period Requirements

When physical layer receives last of *NR-Multi-RTT-ProvideAssistanceData* message and *NR-Multi-RTT-RequestLocationInformation* message from LMF via LPP [34], UE shall be able to measure multiple (up to the UE capability specified in clause 9.9.4.3) UE Rx-Tx time difference measurements as defined in TS 38.215 [4] in configured positioning frequency layers within the measurement period $T_{UERxTx,Total}$ ms.

$$T_{UERxTx,\ Total} = \sum_{i=1}^{L} T_{UERxTx,i} + (L-1) * \max\left(T_{effect,i}\right).$$

where i is the index of positioning frequency layer,

$T_{UERxTx,i}$ is the measurement period for UE Rx-Tx time difference measurements in positioning frequency layer *i* as further defined in this clause,

L is total number of positioning frequency layers, and

$T_{effect,i}$ is the periodicity of the UE Rx-Tx time difference measurement in positioning frequency layer *i* as defined further in this clause.

$$T_{UERxTx,i} = \left(k_{multiTEG,i} * CSSF_i * \text{ceil}(K_{p,PRS,i}) * N_{RxBeam,i} * \left\lceil \frac{N_{PRS,i}^{slot}}{N'} \right\rceil \left\lceil \frac{L_{available_PRS,i}}{N} \right\rceil * N_{sample} - 1 \right) * T_{effect,i} + T_{last,i}$$

Where

$CSSF_i$ is the carrier-specific scaling factor for NR PRS-based measurement in the positioning frequency layer *i* as defined in clause 9.1.5.2,

$k_{multiTEG,i}$ is the scaling factor for measurement of same PRS resource with multiple Rx TEGs.

$k_{multiTEG,i}$=1 if UE is not requested by LMF to measure a PRS resource with multiple Rx TEGs via *measureSameDL-PRS-ResourceWithDifferentRxTEGs-r17* [34] in *NR-Multi-RTT-RequestLocationInformation*;

otherwise,

$k_{multiTEG}$=$N_{TEG,i}$, if UE is not capable of receiving same DL PRS resource simultaneously from multiple Rx TEGs, and

$k_{multiTEG}$=$\left\lceil \frac{N_{TEG,i}}{k_{TEG,simul,i}} \right\rceil$ if UE is capable of receiving the same DL PRS resource simultaneously from multiple Rx TEGs.

where

$N_{TEG,i}$ is the number of Rx TEGs with which UE is requested to measure a PRS resource indicated via *measureSameDL-PRS-ResourceWithDifferentRxTEGs-r17* [34] in *NR-Multi-RTT-RequestLocationInformation*, and in case 'n0' is indicated, $N_{TEG,i}$ is the maximum number of Rx TEGs with which UE can support to measure the same PRS resource as reported in *NR-UE-TEG-Capability*, and

$k_{TEG,simul,i}$ is the number of Rx TEGs UE can measure simultaneously which is reported via *measureSameDL-PRS-ResourceWithDifferentRxTEGsSimul*.

$K_{p,PRS,i}$ is a scaling factor for a positioning frequency layer to be measured within the associated measurement gap pattern, which is defined as $K_{p,PRS,i} = N_{total} / N_{available}$ for UE configured with concurrent measurement gap, and $K_{p,PRS,i} = 1$ for UE not configured with concurrent measurement gap.

For a window W of duration max($T_{PRS,i}$, MGRP_max), where MGRP max is the maximum MGRP across all configured per-UE MG and per-FR MG within the same FR as the positioining frequency layer, and starting at the beginning of any associated gap occasions covering the PRS occasion:

N_{total} is the total number of associated gap occasions covering PRS occasions within the window, including those overlapped with other MG occasions within the window, and

$N_{available}$ is the number of non-dropped associated gap occasions covering PRS occasions within the window W, after further accounting for MG collisions by applying the selected gap collision rule

Requirements do not apply if $N_{available}$ =0.

$N_{RxBeam,i}$ is the scaling factor for Rx beam sweeping, and $N_{RxBeam,i}$=1 if positioning frequency layer *i* is in FR1 and if positioning frequency layer *i* is in FR2, $N_{RxBeam,i}$ is equal to the value reported by the UE in *supportedLowerRxBeamSweepingFactor-FR2* if the UE supports the capability for the band containing positioning

frequency layer i, and the LMF indicates *lowerRxBeamSweepingFactor-FR2* in *NR-TDOA-RequestLocationInformation*. $N_{RxBeam,i}$ is equal to 8, otherwise.

$L_{available_PRS,i}$ is the time duration of available PRS resources in the positioning frequency layer *i*, to be measured during $T_{available_PRS,i}$, and is calculated in the same way as PRS duration K defined in clause 5.1.6.5 of TS 38.214 [26]. For calculation of $L_{available_PRS,i}$, only the PRS resources unmuted and fully or partially overlapped with MG are considered.

$N_{PRS,i}^{slot}$ is the maximum number of DL PRS resources of positioning frequency layer i configured in a slot,

{N, T} is UE capability combination per band where N is a duration of DL PRS symbols in ms corresponding to *durationOfPRS-ProcessingSysmbols* in TS 37.355 [34] processed every T ms corresponding to *durationOfPRS-ProcessingSymbolsInEveryTms* in TS 37.355 [34] for a given maximum bandwidth supported by UE corresponding to *supportedBandwidthPRS* in clause 4.2.7.2 of TS 37.355 [34],

N' is UE capability for number of DL PRS resources that it can process in a slot corresponding to *maxNumOfDL-PRS-ResProcessedPerSlot* as specified in clause 6.4.3 of TS 37.355 [34],

N_{sample} is the number of UE Rx-Tx time difference measurement samples:

- N_{sample} = 4 if the UE is not capable of *supportedDL-PRS-ProcessingSamples* defined in [34].
- N_{sample} = 1 if the UE is capable of *supportedDL-PRS-ProcessingSamples* defined in [34] and LMF requests the UE to perform positioning measurements with reduced number of samples by *requestedDL-PRS-ProcessingSamples* [34] and the following conditions are met:
  - PRS bandwidth is within the active BWP and
  - Magnitude of difference between the serving cell's SS-RSRP and the neighbor cell's PRS-RSRP is within [6] dB.
- N_{sample} = [2] if the UE is capable of *supportedDL-PRS-ProcessingSamples* defined in [34] and the LMF requests the UE to perform positioning measurements with reduced number of samples by *requestedDL-PRS-ProcessingSamples* [34] but the following conditions are not met:
  - PRS bandwidth is within the active BWP and
  - Magnitude of difference between the serving cell's SS-RSRP and the neighbor cell's PRS-RSRP is within [6] dB.
- N_{sample} = 4 otherwise.

$T_{last,i}$ is the measurement duration for the last UE Rx-Tx time difference measurement sample in the positioning layer i, including the sampling time and processing time, $T_{last,i} = T_i + T_{available_PRS,i}$,

$T_{effect,i}$ is periodicity of UE Rx-Tx time difference measurement in positioning frequency layer *i*:

$$T_{effect,i} = \left\lceil \frac{T_i}{T_{available_PRS,i}} \right\rceil * T_{available_PRS,i}$$

where

T_i corresponds to *durationOfPRS-ProcessingSymbolsInEveryTms* in TS 37.355 [34],

$T_{available_PRS,i} = LCM(T_{PRS,i}, MGRP_i)$, the least common multiple between $T_{PRS,i}$ and $MGRP_i$

$MGRP_i$ is the measurement gap repetition periodicity in positioning frequency layer *i*.

$T_{PRS,i}$ is the PRS resource periodicity in positioning frequency layer *i*. If the positioning frequency layer *i* has more than one DL PRS resource sets with different PRS periodicities with muting, $T_{per}^{PRS\ with\ muting} = N_{muting} * T_{per}^{PRS}$, the least common multiple of $T_{per}^{PRS\ with\ muting}$ among DL PRS resource sets is used to derive $T_{PRS,i}$, where

T_{per}^{PRS} is the periodicity of PRS resource sets given by the higher-layer parameter *DL-PRS-Periodicity*.

N_{muting} is the scaling factor considering PRS resource muting. $N_{muting} = T_{muting}^{PRS} * L_{muting}$, where T_{muting}^{PRS} is the muting repetition factor given by the higher-layer parameter *DL-PRS-MutingBitRepetitionFactor*, and L_{muting} is the size of the bitmap $\{b^1\}$

Note: For the purpose of calculating $T_{PRS,i}$, only the PRS resources fully or partially covered by the MG are considered.

Except for deferred MT-LR as defined in clause 4.1a.5 [TS 23.273], the time $T_{UERxTx,Total}$ starts from the first MG instance aligned with DL PRS resources in the assistance data after both the *NR-Multi-RTT-RequestLocationInformation* message and *NR-Multi-RTT-ProvideAssistanceData* message from LMF via LPP [34] are delivered to the physical layer of UE.

For deferred MT-LR with other event than "Periodic Location" as defined in clause 4.1a.5.1 [TS 23.273], the time $T_{UERxTx,Total}$ starts from the first MG instance aligned with a DL PRS resource(s) in the assistance data after the associated event(s) occurs.

For deferred MT-LR with event "Periodic Location" as defined in clause 4.1a.5.1 [TS 23.273], the UE shall perform the PRS-RSRP measurement in each reporting period and activate the location report at the time when the periodic timer expires.

Note: No per-positioning frequency layer requirement is applied in scenarios when multiple positioning frequency layers are configured.

The UE Rx-Tx time difference measurement period is restarted if HO occurs during the measurement period and after SRS reconfiguration on the target cell is complete.

The measurement requirements do not apply for a PRS resource:

- if the PRS resource is across two sampling duration of N within duration $L_{available_PRS,i}$ or
- if time span of the PRS resource instance (including at least the minimum number of repetitions specified in the accuracy requirements) is greater than UE reported capability N.

If during the measurement period of one or more positioning frequency layers, the MG pattern is reconfigured either per UE request or not per UE request, the measurement period can be longer.

The requirements in this section apply, provided no PRS symbols are dropped during the measurement period $T_{UERxTx,Total}$ within measurement gaps due to collisions with other signals; otherwise, a longer measurement period may be used.

When PRS-RSRP is configured for multi-RTT, the UE Rx-Tx time difference measurements and PRS-RSRP measurements are performed over the same measurement period.

The requirements in clause 9.9.4 do not apply if the PRS configuration given by higher layer paramters *NR-DL-PRS-AssistanceData* exceeds any of the UE measurement capabilities given by *NR-DL-PRS-ResourcesCapability* in *NR-Multi-RTT-ProvideCapabilities*, and it is up to UE implementation which PRS resources are measured, subject to UE measurement capabilities.

When PSCell or SCell addition or release does not cause SRS reconfiguration during the measurement period, UE continues the UE Rx-Tx time difference measurement, and the measurement period requirements apply.

When PSCell or SCell addition or release causes SRS reconfiguration during the measurement period, UE shall restart the UE Rx-Tx time difference measurement after the SRS reconfiguration on the target cell is complete.

When SRS is reconfigured without serving cell change during the measurement period, UE shall restart the UE Rx-Tx time difference measurement after the SRS reconfiguration is complete.If UE uplink transmission timing changes due to the network-configured Timing Advance command during the UE Rx-Tx measurement period, then the UE Rx-Tx time difference measurement period is restarted after uplink transmission timing changes, and the UE Rx-Tx time difference measurement period requirements in this clause shall not apply.

When a serving cell change occurs during the measurement period, the UE shall continue and complete the UE Rx-Tx time difference measurement provided that the serving cell change does not impact SRS configuration for the UE Rx-Tx time difference measurement.

If UE uplink transmission timing changes due to the change in the N_{TA_offset} defined in Table 7.1.2-2 during the UE Rx-Tx measurement period, then the UE Rx-Tx time difference measurement period is restarted after uplink transmission timing changes, and the UE Rx-Tx time difference measurement period requirements in this clause shall not apply.

If UE uplink transmission timing changes due to the UE autonomous timing adjustment defined in clause 7.1.2 during the UE Rx-Tx measurement period, then:

- UE Rx-Tx measurement period requirements in this clause shall apply for a cell, which is also the downlink reference cell (defined in section 7.1.1) for SRS transmission.
- UE Rx-Tx measurement period requirements in this clause shall not apply for a cell, which is not the downlink reference cell (defined in section 7.1.1) for SRS transmission. The UE Rx-Tx time difference measurement period may be restarted in such case.

9.9.4.6 Measurement Period Requirements without Measurement Gaps

When physical layer receives last of *NR-Multi-RTT-ProvideAssistanceData* message and *NR-Multi-RTT-RequestLocationInformation* message from LMF via LPP [34], UE shall be able to measure multiple (up to the UE capability specified in clause 9.9.4.3) UE Rx-Tx time difference measurements as defined in TS 38.215 [4] in configured positioning frequency layers within the measurement period $T_{UERxTx_wo_gap,Total}$ ms.

$T_{UERxTx_wo_gap,\,Total} = \sum_{i=1}^{L} T_{UERxTx_wo_gap,i} + (L-1) * \max(T_{effect,i})$, if any of the positioning frequency layers are in Case 1, or

$T_{UERxTx_wo_gap,\,Total} = \max(T_{UERxTx_wo_gap,i} + T_{uncertainty,i})$, if all the positioning frequency layers are in Case 2.

Where,

i is the index of positioning frequency layer, and

L is total number of positioning frequency layers, and

$T_{effect,i}$ is the periodicity of the PRS RSTD measurement in positioning frequency layer i, and

$T_{uncertainty,i}$ is the time from the start of the first PPW occasion for positioning frequency layer i to the start of measurement period $T_{UERxTx_wo_gap,\,Total}$.

A positioning frequency layer is in Case 1 if UE reports *ppw-durationOfPRS-Processing1-r17* for the band containing the positioning frequency layer, and a positioning frequency layer is in Case 2 if UE reports *ppw-durationOfPRS-Processing2-r17* for the band containing the positioning frequency layer.

$T_{UERxTx_wo_gap,i}$ is the measurement period for UE Rx-Tx time difference measurement in positioning frequency layer *i* as specified below.

$$T_{UERxTx_wo_gap,i} = \left(k_{multiTEG,i} * N_{RxBeam,i} * \left\lceil \frac{N_{PRS,i}^{slot}}{N'} \right\rceil \left\lceil \frac{L_{available_PRS,i}}{N} \right\rceil * N_{sample} - 1\right) * T_{effect,i} + T_{last,i}$$

Where

$T_{effect,i}$ is the periodicity of the UE Rx-Tx time difference measurement in positioning frequency layer *i* as defined further in this clause.

$k_{multiTEG,i}$ is the scaling factor for measurement of same PRS resource with multiple Rx TEGs.

$k_{multiTEG,i}$=1 if UE is not supported *measureSameDL-PRS-ResourceWithDifferentRxTEGs-r17* or not requested by LMF to measure a PRS resource with multiple Rx TEGs via *measureSameDL-PRS-ResourceWithDifferentRxTEGs-r17* [34] in *NR-DL-TDOA-RequestLocationInformation*;

otherwise,

$k_{multiTEG}$=$N_{TEG,i}$, if UE is not capable of receiving same DL PRS resource simultaneously from multiple Rx TEGs, and

$k_{multiTEG}=\left\lceil \frac{N_{TEG,i}}{k_{TEG,simul,i}} \right\rceil$ if UE is capable of receiving the same DL PRS resource simultaneously from multiple Rx TEGs.

where

$N_{TEG,i}$ is the number of Rx TEGs with which UE is requested to measure a PRS resource indicated via *measureSameDL-PRS-ResourceWithDifferentRxTEGs-r17* [34] in *NR-Multi-RTT-RequestLocationInformation*, and in case 'n0' is indicated, $N_{TEG,i}$ is the maximum number of Rx TEGs with which UE can support to measure the same PRS resource as reported in *NR-UE-TEG-Capability*, and

$k_{TEG,simul,i}$ is the number of Rx TEGs UE can measure simultaneously which is reported via *measureSameDL-PRS-ResourceWithDifferentRxTEGsSimul*.

$N_{RxBeam,i}$ is the scaling factor for Rx beam sweeping, and $N_{RxBeam,i}$=1 if positioning frequency layer *i* is in FR1. If positioning frequency layer *i* is in FR2, $N_{RxBeam,i}$ is equal to the value reported by the UE in *supportedLowerRxBeamSweepingFactor-FR2* if the UE supports the capability for the band containing positioning frequency layer i, and the LMF indicates *lowerRxBeamSweepingFactor-FR2* in *NR-TDOA-RequestLocationInformation*. $N_{RxBeam,i}$ is equal to 8, otherwise.

$L_{available_PRS,i}$ is the time duration of available PRS resources in the positioning frequency layer *i*, to be measured during $T_{available_PRS,i}$, and is calculated in the same way as PRS duration K defined in clause 5.1.6.5 of TS 38.214 [26]. For calculation of $L_{available_PRS,i}$,

only the unmuted PRS resources that meet the applicability conditions and fully or partially overlapped with PRS processing window are considered, if positioning frequency layer i is in Case 1, or

only the PRS resources unmuted and fully or partially overlapped with the first (PPWL-T2) ms of PPW are considered, if positioning frequency layer i is in Case 2, where PPWL is the PPW length and T2 corresponds to *ppw-durationOfPRS-ProcessingSymbolsT2*.

$N_{PRS,i}^{slot}$ is the maximum number of DL PRS resources of positioning frequency layer i configured in a slot,

{N, T} is UE capability combination per band where N is a duration of DL PRS symbols in ms corresponding to *ppw-durationOfPRS-ProcessingSymbolsN* in TS 37.355 [34] if positioning frequency layer *i* is in Case 1, or corresponding to *ppw-durationOfPRS-ProcessingSymbolsN2* in TS 37.355 [34] if positioning frequency layer *i* is in Case 2,

- N' is UE capability for number of DL PRS resources that it can process in a slot corresponding to *ppw-maxNumOfDL-PRS-ResProcessedPerSlot* as specified in clause 6.4.3 of TS 37.355 [34],

- N_{sample} is the number of UE Rx-Tx time difference measurement samples:

  - N_{sample} = 4 if the UE is not capable of *supportedDL-PRS-ProcessingSamples* defined in [34].

  - N_{sample} = 1 if the UE is capable of *supportedDL-PRS-ProcessingSamples* defined in [34] and LMF requests the UE to perform positioning measurements with reduced number of samples by *requestedDL-PRS-ProcessingSamples* [34] and the following conditions are met:

    - PRS bandwidth is within the active BWP and

    - Magnitude of difference between the serving cell's SS-RSRP and the neighbor cell's PRS-RSRP is within [6] dB.

  - N_{sample} = [2] if the UE is capable of *supportedDL-PRS-ProcessingSamples* defined in [34] and the LMF requests the UE to perform positioning measurements with reduced number of samples by *requestedDL-PRS-ProcessingSamples* [34] but the following conditions are not met:

    - PRS bandwidth is within the active BWP and

    - Magnitude of difference between the serving cell's SS-RSRP and the neighbor cell's PRS-RSRP is within [6] dB.

  - N_{sample} = 4 otherwise.

- $T_{last,i}$ is the measurement duration for the last UE Rx-Tx time difference measurement sample in the positioning layer i, including the sampling time and processing time.

  If positioning frequency layer *i* is in Case 1 and all of the PRS resources to be measured are available in the same PPW occasion during $T_{available}$, then $T_{last,i} = T_i$ +PPWL, else

  if positioning frequency layer *i* is in Case 2 and all of the PRS resources to be measured are available in the same PPW occasion during $T_{available}$, then $T_{last,i}$ = PPWL;

  otherwise, $T_{last,i} = T_i + T_{available_PRS,i}$.

- $T_{effect,i}$ is periodicity of UE Rx-Tx time difference measurement in positioning frequency layer *i*:

$$T_{effect,i} = \left\lceil \frac{T_i}{T_{available_{PRS},i}} \right\rceil * T_{available_{PRS},i}$$

where

T_i corresponds to *ppw-durationOfPRS-ProcessingSymbolsT* in TS 37.355 [34] if positioning frequency layer *i* is in Case 1, or corresponds to the sum of *ppw-durationOfPRS-ProcessingSymbolsT2* and *ppw-durationOfPRS-ProcessingSymbolsN2* in TS 37.355 [34] if positioning frequency layer *i* is in Case 2,

$T_{available_PRS,i} = LCM(T_{PRS,i}, PPWRP_i)$, the least common multiple between $T_{PRS,i}$ and $PPWRP_i$

$PPWRP_i$ is the PRS processing window repetition periodicity in positioning frequency layer *i*.

$T_{PRS,i}$ is the PRS resource periodicity in positioning frequency layer *i*. If the positioning frequency layer *i* has more than one DL PRS resource sets with different PRS periodicities with muting, $T_{per}^{PRS\ with\ muting} = N_{muting} * T_{per}^{PRS}$, the least common multiple of $T_{per}^{PRS\ with\ muting}$ among DL PRS resource sets is used to derive $T_{PRS,i}$, where

T_{per}^{PRS} is the periodicity of PRS resource sets given by the higher-layer parameter *DL-PRS-Periodicity*.

N_{muting} is the scaling factor considering PRS resource muting. $N_{muting} = T_{muting}^{PRS} * L_{muting}$, where T_{muting}^{PRS} is the muting repetition factor given by the higher-layer parameter *DL-PRS-MutingBitRepetitionFactor*, and L_{muting} is the size of the bitmap $\{b^1\}$

Note: For the purpose of calculating $T_{PRS,i}$, only the PRS resources that meet the applicability conditions and fully or partially covered by the PRS processing window are considered.

The time $T_{UERxTx_wo_gap,i}$ starts from the first PRS processing window instance aligned with DL PRS resources in the assistance data after both the *NR-Multi-RTT-RequestLocationInformation* message and *NR-Multi-RTT-ProvideAssistanceData* message from LMF via LPP [34] are delivered to the physical layer of UE.

The UE Rx-Tx time difference measurement period is restarted if HO occurs during the measurement period and after SRS reconfiguration on the target cell is complete.

The measurement requirements do not apply for a PRS resource:

- if the PRS resource is across two sampling duration of N within duration $L_{available_PRS,i}$ or
- if time span of the PRS resource instance (including at least the minimum number of repetitions specified in the accuracy requirements) is greater than UE reported capability N.

If during the measurement period of one or more positioning frequency layers, the PRS processing window is reconfigured or reactivated either per UE request or not per UE request, the measurement period can be longer.

The requirements in this section apply, provided no PRS symbols are dropped during the measurement period $T_{UERxTx_wo_gap,i}$ within PRS processing window due to collisions with other signals; otherwise, a longer measurement period may be used.

When PRS-RSRP is configured for multi-RTT, the UE Rx-Tx time difference measurements and PRS-RSRP measurements are performed over the same measurement period.

The requirements in clause 9.9.4.6 do not apply if the PRS configuration given by higher layer paramters *NR-DL-PRS-AssistanceData* exceeds any of the UE measurement capabilities given by *NR-DL-PRS-ResourcesCapability* in *NR-Multi-RTT-ProvideCapabilities*, and it is up to UE implementation which PRS resources are measured, subject to UE measurement capabilities.

When PSCell or SCell addition or release does not cause SRS reconfiguration during the measurement period, UE continues the UE Rx-Tx time difference measurement, and the measurement period requirements apply.

When PSCell or SCell addition or release causes SRS reconfiguration during the measurement period, UE shall restart the UE Rx-Tx time difference measurement after the SRS reconfiguration on the target cell is complete.

When SRS is reconfigured without cell change during the measurement period, UE shall restart the UE Rx-Tx time difference measurement after the SRS reconfiguration on the target cell is complete.

If UE uplink transmission timing changes due to the network-configured Timing Advance command during the UE Rx-Tx measurement period, then the UE Rx-Tx time difference measurement period is restarted after uplink transmission timing changes, and the UE Rx-Tx time difference measurement period requirements in this clause shall not apply.

If UE uplink transmission timing changes due to the change in the N_{TA_offset} defined in Table 7.1.2-2 during the UE Rx-Tx measurement period, then the UE Rx-Tx time difference measurement period is restarted after uplink transmission timing changes, and the UE Rx-Tx time difference measurement period requirements in this clause shall not apply.

If UE uplink transmission timing changes due to the UE autonomous timing adjustment defined in clause 7.1.2 during the UE Rx-Tx measurement period, then:

- UE Rx-Tx measurement period requirements in this clause shall apply for a cell, which is also the downlink reference cell (defined in section 7.1.1) for SRS transmission.
- UE Rx-Tx measurement period requirements in this clause shall not apply for a cell, which is not the downlink reference cell (defined in section 7.1.1) for SRS transmission. The UE Rx-Tx time difference measurement period may be restarted in such case.

If any positioning frequency layer is in Case 2, the requirements in this clause apply provided that the PPWL corresponding to the positioning frequency layer is larger than (T2+X) ms.

The requirements in this clause apply provided that a single positioning frequency layer is configured for measurement in each PPW.

9.9.4.7 Void

9.9.4.8 Measurements Period Requirements with both MG and PPW

If the UE is configured with both MG applicable to positioning measurement and PPW, the UE shall measure positioning frequency layer *i* within

- MG, if PRS resources on positioning frequency layer *i* are overlapped with MG, or
- PPW, if PRS resources on positioning frequency layer *i* are overlapped with PPW.

The measurement period $T_{UERxTx,\ Total}$ is defined as:

$$T_{UERxTx,\ Total} = T_{UERxTx,Total,MG} + T_{UERxTx,Total,PPW} + T_{guard},$$

Where

- $T_{UERxTx,Total,MG}$ is defined in clause 9.9.4.5 and includes all positioning frequency layers to be measured within MG,
- $T_{UERxTx,Total,PPW}$ is defined in clause 9.9.4.6 and includes all positioning frequency layers to be measured within PPW,
- T_{guard} is the maximum T_{effect} defined in clauses 9.9.4.5 and 9.9.4.6 among all PFLs.

The requirements apply provided the following conditions are satisfied:

- MGs and PPWs do not overlap in time;
- Each PFL in the assistance data can be measured completely (all PRS resources) either within MG or within activated PPW.

9.9.5 E-CID measurements

9.9.5.1 Introduction

The requirements in clause 9.9.5 shall apply provided the UE has received *nr-ECID-RequestLocationInformation* message from LMF via LPP [34] requesting the UE to report one or more of the following measurements for NR E-CID positioning [22]: SS-RSRP, SS-RSRQ, CSI-RSRP, and CSI-RSRQ.

9.9.5.2 Measurement Requirements

9.9.5.2.1 Intra-frequency Measurement Requirements

The intra-frequency NR E-CID measurements shall meet the requirements in clause 9.2 and clause 9.10.2, except the measurement reporting requirements. The NR E-CID measurement reporting requirements are defined in clause 9.9.5.2.3.

The reported intra-frequency NR E-CID measurements shall also meet:

- for FR1 SS-RSRP, the accuracy requirements in clauses 10.1.2.1,
- for FR1 SS-RSRQ, the accuracy requirements in clauses 10.1.7.1,
- for FR1 CSI-RSRP, the accuracy requirements in clause 10.1.2.3,
- for FR1 CSI-RSRQ, the accuracy requirements in clause 10.1.7.2,
- for FR2 SS-RSRP, the accuracy requirements in clauses 10.1.3.1,
- for FR2 SS-RSRQ, the accuracy requirements in clauses 10.1.8.1,
- for FR2 CSI-RSRP, the accuracy requirements in clause 10.1.3.3,
- for FR2 CSI-RSRQ, the accuracy requirements in clause 10.1.8.2.

9.9.5.2.2 Inter-frequency Measurement Requirements

The inter-frequency NR E-CID measurements shall meet the requirements in clause 9.3 and 9.10.4, except the measurement reporting requirements. The NR E-CID measurement reporting requirements are defined in clause 9.9.5.2.3.

The reported inter-frequency NR E-CID measurements shall also meet:

- for FR1 SS-RSRP, the accuracy requirements in clauses 10.1.4.1,
- for FR1 SS-RSRQ, the accuracy requirements in clauses 10.1.9.1,
- for FR1 CSI-RSRP, the accuracy requirements 10.1.4.3,
- for FR1 CSI-RSRQ, the accuracy requirements 10.1.9.2,
- for FR2 SS-RSRP, the accuracy requirements in clauses 10.1.5.1,
- for FR2 SS-RSRQ, the accuracy requirements in clauses 10.1.10.1,

- for FR2 CSI-RSRP, the accuracy requirements 10.1.5.3,
- for FR2 CSI-RSRQ, the accuracy requirements 10.1.10.2.

9.9.5.2.3 Measurement Reporting Delay

The measurement reporting delay is defined as the time between the moment when the periodic measurement report is triggered and the moment when the UE starts to transmit the measurement report over the air interface. This requirement assumes that that the measurement report is not delayed by other LPP signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: 2 x TTI_{DCCH} where TTI_{DCCH} is the duration of subframe or slot or subslot when the measurement report is transmitted on the PUSCH with subframe or slot or subslot duration. This measurement reporting delay excludes any delay caused by no UL resources for UE to send the measurement report.

The reported NR E-CID measurement values contained in periodically triggered measurement reports shall be based on the measurement report mapping requirements specified in clause 10.1.6 for SS-RSRP and CSI-RSRP, and clause 10.1.11 for SS-RSRQ and CSI-RSRQ.

The UE shall not send any measurement reports as long as no corresponding reporting criteria specified in clause 9.1.4 are fulfilled.

9.9.6 PRS-RSRPP measurements

9.9.6.1 Introduction

The requirements in clause 9.9.6.5 shall apply when UE is performing PRS measurement in the configured MG and provided the UE has received a message from LMF via LPP requesting the UE to measure and report PRS-RSRPP measurements defined in TS 38.215 [4].

The requirements in clause 9.9.6.6 shall apply when UE is performing PRS measurement without gap and provided the UE has received a message from LMF via LPP requesting the UE to measure and report PRS-RSRPP measurements defined in TS 38.215 [4].

9.9.6.2 Requirements applicability

The requirements in clause 9.9.6 apply for periodic and triggered PRS-RSRPP measurements, provided:

- PRS-RSRPP related side conditions given in clause 10.1.X are met for a corresponding Band.

9.9.6.3 Measurement capability

UE PRS-RSRPP measurement capability is as indicated by the UE in *NR-DL-AoD-ProvideCapabilities* according to TS 37.355 [34].

9.9.6.4 Measurement reporting requirements

This requirement assumes that the measurement report is not delayed by other LPP signalling on the DCCH. This measurement reporting delay excludes the delay uncertainty caused by inserting the measurement report into the TTI of the uplink DCCH. The delay uncertainty is: 2 x TTI_{DCCH} where TTI_{DCCH} is the duration of subframe or slot or subslot when the measurement report is transmitted on the PUSCH with subframe or slot or subslot duration. This measurement reporting delay excludes any delay caused by no UL resources for UE to send the measurement report.

The reported PRS-RSRPP measurement values contained in measurement reports shall be based on the measurement report mapping requirements specified in clauses 10.1.24.3.

The PRS-RSRPP measurement accuracy for all measured PRS resources shall be fulfilled according to the accuracy requriements specified in the clauses 10.1.24.X.

9.9.6.5 Measurement period requirements

For PRS measurement within MG configured to UE, measurement period requirements for PRS-RSRP defined in 9.9.3.5 is re-used for PRS-RSRPP.

9.9.6.6 Measurement Period Requirements without Measurement Gaps

For PRS measurement without MG configured to UE, measurement period requirements for PRS-RSRP defined in 9.9.3.6 is re-used for PRS-RSRPP.

The PRS-RSRPP measurement requirements in this section apply for the first path PRS-RSRP measurement.

9.9.6.7 Void

9.9.6.8 Measurements Period Requirements with both MG and PPW

If the UE is configured with both MG applicable to positioning measurement and PPW, the measurement period requirements for PRS-RSRP defined in 9.9.3.8 is re-used for PRS-RSRPP.

9.10 CSI-RS based L3 measurements

9.10.1 Introduction

This clause contains general requirements on the UE regarding CSI-RS based measurement reporting in RRC_CONNECTED state. The requirements are split in intra-frequency and inter-frequency measurements requirements.

The requirements in this clause apply, provided:

- Only one MO is configured per CSI-RS frequency layer, and
- all CSI-RS resources in the same MO are configured with the same csi-rs-MeasurementBW, and
- *associatedSSB* is configured in *CSI-RS-Resource-Mobility* and detectable, and
- all CSI-RS resources in the same MO are configured with the same periodicity, and- the associated SSB is QCLed with the corresponding CSI-RS resources in FR2, and
- the number of CSI-RS resources in any duration that equals to the length of a slot is no larger than UE capability *maxNumberCSI-RS-RRM-RS-SINR*.
- When there are mixed numerologies, the length of a slot is defined based on the smallest SCS

9.10.2 CSI-RS based intra-frequency measurements

9.10.2.1 Introduction

A measurement is defined as a CSI-RS based intra-frequency measurement provided that:

- the SCS of the CSI-RS resource of the neighbour cell configured for measurement is the same as the SCS of the CSI-RS resource on the serving cell indicated for measurement, and
- the CP type of the CSI-RS resource of neighbour cell configured for measurement is the same as the CP type of the CSI-RS resource of the serving cell indicated for measurement, and

- It is applied for SCS = 60KHz

- the centre frequency of the CSI-RS resource of the neighbour cell configured for measurement is the same as the centre frequency of the CSI-RS resource of the serving cell indicated for measurement

The UE shall be able to identify new intra-frequency cells and perform CSI-RSRP, CSI-RSRQ and CSI-SINR measurements of identified intra-frequency cells if carrier frequency information is provided by PCell or the PSCell.

No measurement gap is needed for intra-frequency CSI-RS resources measurements.

For intra-frequency CSI-RS based measurements, UE may cause scheduling restriction as specified in clause 9.10.2.6.

Note: Extended CP for CSI-RS based measurement is not supported in this release.

9.10.2.2 Requirements applicability

The measurement of the associated SSB follows the same requirements as SSB based measurements defined in 9.2.

The requirements in clause 9.10.2 apply, provided:

- Only one intra-frequency CSI-RS layer per serving cell is configured, and

- The BW of the CSI-RS on the intra-frequency neighbor cell is within the active BWP of the UE, and

- The associated SSB of the CSI-RS resources being identified or measured are detectable, and the CSI-RS resources configured for CSI-RS based L3 measurements are measurable, and

- The bandwidth of CSI-RS resources of intra-MO is the same as that of the CSI-RS resources configured for the serving cell, and

- All CSI-RS resources on one intra-frequency layer are configured within up to two separate windows where each window is up to 5ms, and

- for the case of single window further provided

- The periodicity of the configured CSI-RS resources is 10ms, 20ms or 40ms- for the case of two separate windows further provided

  - The two windows are either both fully non-overlapped with MG or both partially overlapped with MG

    - The periodicity of the configured CSI-RS resources is 20ms or 40ms

  - The starting point of the first window is the slot boundary of the serving cell, where the corresponding slot contains the configured L3 CSI-RS resource of the serving cell in the servingCellMO with the smallest offset, and

  - The starting point of the second window if configured is determined by an offset of half of the CSI-RS periodicity in slots with regards to the starting point of the first window, and

- Numerology for intra-frequency CSI-RS and data of serving cell are the same.

An intra-frequency cell shall be considered detectable when for each relevant associated SSB:

- SS-RSRP related side conditions given in clauses 10.1.2.1 and 10.1.3.1 for FR1 and FR2, respectively, for a corresponding Band,

- SS-RSRQ related side conditions given in clauses 10.1.7.1 and 10.1.8.1 for FR1 and FR2, respectively, for a corresponding Band,

- SS-SINR related side conditions given in clauses 10.1.12.1 and 10.1.13.1 for FR1 and FR2, respectively, for a corresponding Band,

- SSB_RP and SSB Ês/Iot according to Annex B.2.2 for a corresponding Band.

A CSI-RS resource shall be considered measurable when for each relevant CSI-RS resource:

- CSI-RSRP related side conditions given in clauses 10.1.2.3 and 10.1.3.3 for FR1 and FR2, respectively, for a corresponding Band,
- CSI-RSRQ related side conditions given in clauses 10.1.7.2 and 10.1.8.2 for FR1 and FR2, respectively, for a corresponding Band,
- CSI-SINR related side conditions given in clauses 10.1.12.2 and 10.1.13.2 for FR1 and FR2, respectively, for a corresponding Band,
- CSI_RP and CSI-RS Ês/Iot according to Annex B.2.12 for a corresponding Band.

9.10.2.3 Number of cells and number of CSI-RS

9.10.2.3.1 Requirements for FR1

For each intra-frequency CSI-RS layer, during each layer 1 measurement period, the UE shall be capable of performing CSI-RSRP, CSI-RSRQ, and CSI-SINR measurements for at least:

- 32 CSI-RSs with different CSI-RS index and/or PCI on the intra-frequency layer, and
- the cells to be monitored based on CSI-RS are the same set or a subset of the cells monitored based on the layer of the associated SSB

9.10.2.3.2 Requirements for FR2

For one single intra-frequency CSI-RS layer in a band, during each layer 1 measurement period, the UE shall be capable of performing CSI-RSRP, CSI-RSRQ, and CSI-SINR measurements for at least:

- 32 CSI-RSs with different CSI-RS index and/or PCI, and
- the cells to be monitored based on CSI-RS are the same set or a subset of the cells monitored based on the layer of the associated SSB.

where this single intra-frequency layer shall be:

- PCC on which UE is configured to report CSI-RS measurement when UE is configured with SA NR operation mode with PCC in the band; or
- PSCC on which UE is configured to report CSI-RS measurement when UE is configured with EN-DC with PSCC in the band; or
- One of the SCCs on which UE is configured to report CSI-RS based measurements when neither PCC nor PSCC is in the same band, so that the selected SCC shall be an SCC where the UE is configured with CSI-RSRP measurement reporting if such SCC exists, otherwise the selected SCC is determined by UE implementation.

The UE shall also be capable of performing CSI-RSRP, CSI-RSRQ, and CSI-SINR measurements for at least 2 CSI-RSs on serving cell for each of the other intra-frequency layer(s) in the same band.

For each FR2 band, UE is only required to measure neighbour cell CSI-RS on the CSI-RS layer, whose associated SSB should be on the same SSB layer as the one where UE is required to measure neighbour cell SSB.

9.10.2.4 Measurement Reporting Requirements

Note: The UE is not required to report CSI-RS based L3 measurements when the timing offset between the reference measurement timing and the target CSI-RS in one layer is larger than one CP. If the UE reports CSI-RS based L3 measurements when the timing offset exceeds one CP, the UE may not meet the CSI-RS based L3 measurement accuracy requirements for CSI-RSRP, CSI-RSRQ and CSI-SINR in TS 38.133 section 10.1, which apply only when the timing offset is no larger than one CP.

9.10.2.4.1 Periodic Reporting

Reported CSI-RSRP, CSI-RSRQ, and CSI-SINR measurements contained in periodic measurement reports shall meet the requirements in clauses 10.1.2.3, 10.1.3.3, 10.1.7.2, 10.1.8.2, 10.1.12.2 and 10.1.13.2.

9.10.2.4.2 Event-triggered Periodic Reporting

Reported CSI-RSRP, CSI-RSRQ, and CSI-SINR measurements contained in event-triggered periodic measurement reports shall meet the requirements in clauses 10.1.2.3, 10.1.3.3, 10.1.7.2, 10.1.8.2, 10.1.12.2 and 10.1.13.2.

The first report in event triggered periodic measurement reporting shall meet the requirements specified in clause 9.10.2.4.3.

9.10.2.4.3 Event Triggered Reporting

Reported CSI-RSRP, CSI-RSRQ, and CSI- SINR measurements contained in event triggered measurement reports shall meet the requirements in clauses 10.1.2.3, 10.1.3.3, 10.1.7.2, 10.1.8.2, 10.1.12.2 and 10.1.13.2.

The UE shall not send any event triggered measurement reports as long as no reporting criterion is fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: 2 x TTI_{DCCH}. This measurement reporting delay excludes a delay which caused by no UL resources being available for UE to send the measurement report on.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than the CSI-RS based measurement defined in clause 9.10.2.5. When L3 filtering is used an additional delay can be expected.

9.10.2.5 Intra-frequency measurements without measurement gaps

If a UE is configured with the higher layer parameters *CSI-RS-Resource-Mobility* and *associatedSSB*, the CSI-RS based measurement shall include PSS/SSS detection time of associatedSSB, the time period used to acquire the SFN information and CSI-RS based measurement period without gap.

- PSS/SSS detection time of associatedSSB is the intra-frequency T_{PSS/SSS_sync_intra} in Clause 9.2.5.1.
- The time period used to acquire the SFN information is equal to 0 if the UE is indicated that the neighbour cell is synchronous with the serving cell (*deriveSSB-IndexFromCell* is enabled). Otherwise, the time period used to acquire the SFN information is $T_{CSI\text{-}RS_SFN_intra}$ as shown in Table 9.10.2.5-3 for FR1. It is assumed that *deriveSSB-IndexFromCell* is always enabled for FR1 TDD and FR2.
- If the associatedSSB, which has been detectable at least for the time period $T_{identify_intra_with_index}$ defined in clause 9.2.5.1, becomes undetectable for a period ≤ 5 seconds and then the associatedSSB becomes detectable again with the same spatial reception parameter provided the timing to that cell has not changed more than $\pm 3200/2^{\mu} T_c$, where μ is the SCS configuration as defined in clause 4.2 of TS 38.211 [3], PSS/SSS detection time and time period used to acquire the SFN information are equal to 0.

The measurement period for CSI- RS based intra-frequency measurements without gaps is as shown in table 9.10.2.5-1and Table 9.10.2.5-2.

Additionally, for a given CSI-RS resource, if the associated SS/PBCH block is configured but not detected by the UE, or if CSI-RS is configured with associated SSB but not QCL-ed to the associated SSB, the UE is not required to monitor the corresponding CSI-RS resource.

Table 9.10.2.5-1: Measurement period for intrafrequency CSI-RS based measurements without gaps(FR1)

DRX cycle	$T_{CSI\text{-}RS_measurement_period_intra}$
No DRX	max(200ms, ceil(5 x $K_{p_CSI\text{-}RS}$) x CSI-RS period) x $CSSF_{intra}$

DRX cycle≤ 320ms	max(200ms, ceil(1.5x 5 x K_{p_CSI-RS}) x max(CSI-RS period, DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	ceil(5 x K_{p_CSI-RS}) x DRX cycle x $CSSF_{intra}$
NOTE 1: The requirements apply assuming CSI-RS configuration with {D=3 with PRBs ≥ 48}. D is frequency domain density for the 1-port CSI-RS for L3 mobility defined in clause 7.4.1 of TS38.211 [6].	

Table 9.10.2.5-2: Measurement period for intrafrequency CSI-RS based measurements without gaps(FR2)

DRX cycle	$T_{CSI-RS_measurement_period_intra}$
No DRX	max(400ms, ceil($M_{meas_period_w/o_gaps}$ x K_{p_CSI-RS}) x CSI-RS period) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(400ms, ceil(1.5x $M_{meas_period_w/o_gaps}$ x K_{p_CSI-RS}) x max(CSI-RS period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	$M_{meas_period_w/o_gaps}$ x DRX cycle x $CSSF_{intra}$
NOTE 1: The requirements apply assuming CSI-RS configuration with {D=3 with PRBs ≥ 48}. D is frequency domain density for the 1-port CSI-RS for L3 mobility defined in clause 7.4.1 of TS38.211 [6].	

$M_{meas_period_w/o_gaps}$: For a UE supporting power class 1, $M_{meas_period_w/o_gaps}$ =40. For a UE supporting FR2 power class 2, $M_{meas_period_w/o_gaps}$ =24. For a UE supporting power class 3, $M_{meas_period_w/o_gaps}$ =24. For a UE supporting power class 4, $M_{meas_period_w/o_gaps}$ =24.

$CSSF_{intra}$: it is a carrier specific scaling factor and is determined according to $CSSF_{outside_gap,i}$ in clause 9.1.5.

For a UE not supporting *concurrentMeasGap-r17* or for a UE is supporting *concurrentMeasGap-r17* but not configured with concurrent measurement gaps,

- if the intra-frequency CSI-RS resource does not overlap with any measurement gaps, K_{p_CSI-RS}=1;
- if some occaions of the intra-frequency CSI-RS resource is overlap with ameasurement gaps, K_{p_CSI-RS} = 1/(1-(CSI-RS resource period /MGRP)) , where CSI-RS resource period < MGRP, and the MGRP is the periodicity of the measurement gap.
- Otherwise, if a UE which support concurrent measurement gaps and has been configured with concurrent measurement gaps, K_{p_CSI-RS} is the scaling factor for a CSI-RS frequency layer to be measured outside gap which is defined as $K_{p_CSI-RS} = N_{total} / N_{available}$

  For a window W of duration max(CSI-RS period, MGRP_max), where MGRP max is the maximum MGRP across all configured per-UE MG and per-FR MG within the same FR as the CSI-RS frequency layer, and starting at the beginning of any gap occasions covering the CSI-RS resources:

  N_{total} is the total number of CSI-RS resources within the window, including those overlapped with other MG occasions within the window, and

  $N_{available}$ is the number of CSI-RS resources that are not overlapped with any other non-dropped MG occasion within the window W, after accounting for MG collisions by applying the selected gap collision rule.

  K_{p_CSI-RS} = 1 when $N_{available}$ = 0

Table 9.10.2.5-3: Time period for SFN acquisition for intra-frequency CSI-RS based measurements without gaps(FR1)

DRX cycle	$T_{CSI-RS_SFN_intra}$
No DRX	max(200ms, ceil(5 x K_p) x SMTC period)[Note 1] x $CSSF_{intra}$
DRX cycle≤ 320ms	max(2000ms, ceil (1.5 x 5 x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	Ceil(5 x K_p) x DRX cycle x $CSSF_{intra}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified NOTE 2: K_{p_CSI-RS} is applicable for a UE supporting concurrent gaps	

9.10.2.6 Scheduling availability of UE during CSI-RS based intra-frequency measurements

UE is required to be capable of measuring without measurement gaps when CSI-RS resources are completely contained in the active BWP of the UE. Note the configured CSI-RS symbol is indicated in *firstOFDMSymbolInTimeDomain* included in *CSI-RS-ResourceConfigMobility* for RRM. When UE is required to perform CSI-RS based RRM measurements, and any of the conditions in the following clauses is met, there are restrictions on the scheduling availability; otherwise, there is no scheduling restriction. Note same numerology for intra-frequency CSI-RS and data of serving cell is considered in this release.

9.10.2.6.1 Scheduling availability of UE performing CSI-RS based measurements in TDD bands

When UE performs CSI-RS intra-frequency measurements in a TDD band,

- UE is not expected to transmit PUCCH/PUSCH/SRS on configured CSI-RS resource symbols, and on 1 OFDM symbol before and after each consecutively configured CSI-RS symbols.

When TDD intra-band carrier aggregation is performed, the scheduling restrictions due to a given serving cell should also apply to all other serving cells in the same band on the symbols that fully or partially overlap with the aforementioned restricted symbols.

9.10.2.6.2 Scheduling availability of UE performing CSI-RS based measurements in FR2

When the UE performs CSI-RS based intra-frequency measurements for L3 mobility management in FR2, the following restrictions apply.

- The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on the configured CSI-RS symbol within the configured slot as indicated in *slotConfig* of the corresponding CSI-RS resource to be measured for mobility.

When intra-band carrier aggregation in FR2 is performed, the scheduling restrictions due to a given serving cell should also apply to all other serving cells in the same band on the symbols that fully or partially overlap with aforementioned restricted symbols.

When inter-band carrier aggregation in FR2 is performed, there are no scheduling restrictions on FR2 serving cells in the bands due to CSI-RSRP, CSI-RSRQ or CSI-SINR measurement on an FR2 intra-frequency cell in different bands, provided that UE is capable of independent beam management on this FR2 band pair.

9.10.3 CSI-RS based Inter-frequency measurements

9.10.3.1 Introduction

A measurement is defined as a CSI-RS based inter-frequency measurement provided it is not defined as an intra-frequency measurement according to clause 9.10.2.

If a UE is configured with the higher layer parameter *CSI-RS-Resource-Mobility* and the higher layer parameter *associatedSSB* is configured, the UE shall be able to identify inter-frequency cells indicated for measurement and perform CSI-RSRP, CSI-RSRQ, and CSI-SINR measurements of identified inter-frequency cells.

When measurement gaps are needed, the UE is not expected to detect the associated SSB nor perform measurement of the CSI-RS resource configured in *CSI-RS-Resource-Mobility* on an inter-frequency measurement object which start earlier than the gap starting time + switching time, and ends later than the gap end – switching time. When the inter-frequency cells are in FR2 and the per-FR gap is configured to the UE in EN-DC, SA NR, NE-DC and NR-DC, or the serving cells are in FR2, the inter-frequency cells are in FR2 and the per-UE gap is configured to the UE in SA NR and NR-DC, the switching time is 0.25ms. Otherwise the switching time is 0.5ms.

If a UE is configured with multiple concurrent gaps, the requirements in this clause shall apply when the measurement gap pattern is configured to be associated to the CSI-RS resources of the inter-frequency layer.

9.10.3.2 Requirements applicability

The associated SSB layer of the CSI-RS follows the same requirements as SSB based measurements defined in 9.3.

The requirements in clause 9.10.3 apply, provided:

- The associated SSB of the cell being identified or measured is detectable, and
- All CSI-RS resources on one inter-frequency layer are configured within a window of up to 5ms, and
- The periodicity of the configured CSI-RS resources is 10ms, 20ms or 40ms, and
- CSI-RS resources for measurements and the associated SSB for cell identification are configured within measurement gap.

An inter-frequency cell shall be considered detectable when for each relevant associated SSB:

- SS-RSRP related side conditions given in clauses 10.1.4.1 and 10.1.5.1 for FR1 and FR2, respectively, for a corresponding Band,
- SS-RSRQ related side conditions given in clauses 10.1.9.1 and 10.1.10.1 for FR1 and FR2, respectively, for a corresponding Band,
- SS-SINR related side conditions given in clauses 10.1.14.1 and 10.1.15.1 for FR1 and FR2, respectively, for a corresponding Band,
- SSB_RP and SSB Ês/Iot according to Annex B.2.3 for a corresponding Band.

A CSI-RS resource shall be considered measurable when for each relevant CSI-RS resource:

- CSI-RSRP related side conditions given in clauses 10.1.4.3 and 10.1.5.3 for FR1 and FR2, respectively, for a corresponding Band,
- CSI-RSRQ related side conditions given in clauses 10.1.9.2 and 10.1.10.2 for FR1 and FR2, respectively, for a corresponding Band,
- CSI-SINR related side conditions given in clauses 10.1.14.2 and 10.1.15.2 for FR1 and FR2, respectively, for a corresponding Band,
- CSI _RP and CSI-RS Ês/Iot according to Annex B.2.13 for a corresponding Band.

9.10.3.3 Number of cells and number of CSI-RS resources

9.10.3.3.1 Requirements for FR1

For each inter-frequency CSI-RS layer, during each layer 1 measurement period, the UE shall be capable of performing CSI-RSRP, CSI-RSRQ, and CSI-SINR measurements for at least:

- 14 CSI-RSs with different CSI-RS index and/or PCI , and
- The cells to be monitored based on CSI-RS are the same set or a subset of the cells monitored based on the layer of the associated SSB.

9.10.3.3.2 Requirements for FR2

For each inter-frequency CSI-RS layer, during each layer 1 measurement period, the UE shall be capable of performing CSI-RSRP, CSI-RSRQ, and CSI-SINR measurements for at least:

- 24 CSI-RSs with different CSI-RS index and/or PCI, and
- The cells to be monitored based on CSI-RS are the same set or a subset of the cells monitored based on the layer the associated SSB.

9.10.3.4 Measurements reporting requirements

Note: The UE is not required to report CSI-RS based L3 measurements when the timing offset between the reference measurement timing and the target CSI-RS in one layer is larger than one CP. If the UE reports CSI-RS based L3 measurements when the timing offset exceeds one CP, the UE may not meet the CSI-RS based L3 measurement accuracy requirements for CSI-RSRP, CSI-RSRQ and CSI-SINR in TS 38.133 section 10.1, which apply only when the timing offset is no larger than one CP.

9.10.3.4.1 Periodic Reporting

Reported CSI-RSRP, CSI-RSRQ, and CSI-SINR measurements contained in periodically triggered measurement reports shall meet the requirements in clauses 10.1.4.2, 10.1.5.2, 10.1.9.2, 10.1.10.2, 10.1.14.2 and 10.1.15.2..

9.10.3.4.2 Event-triggered Periodic Reporting

Reported CSI-RSRP, CSI-RSRQ, and CSI-SINR measurements contained in periodically triggered measurement reports shall meet the requirements in clauses 10.1.4.2, 10.1.5.2, 10.1.9.2, 10.1.10.2, 10.1.14.2 and 10.1.15.2..

The first report in event triggered periodic measurement reporting shall meet the requirements specified in clause 9.10.3.4.3.

9.10.3.4.3 Event-triggered Reporting

Reported CSI-RSRP, CSI-RSRQ, and CSI-SINR measurements contained in periodically triggered measurement reports shall meet the requirements in clauses 10.1.4.2, 10.1.5.2, 10.1.9.2, 10.1.10.2, 10.1.14.2 and 10.1.15.2..

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times TTI_{DCCH}$. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be within CSI-RS based measurement defined in clause . When L3 filtering is used an additional delay can be expected.

9.10.3.5 Inter frequency measurements with measurement gaps

When measurement gaps are provided, if configured with the higher layer parameters *CSI-RS-Resource-Mobility* and *associatedSSB*, the UE shall be able to identify a new detectable CSI-RS based inter frequency cell within $T_{CSI-RS_identify_inter}$,

$$T_{CSI-RS_identify_inter} = (T_{PSS/SSS_sync} + T_{CSI-RS_measurement_period_inter} + T_{CSI-RS_SFN_inter})\ ms$$

Where:

T_{PSS/SSS_sync} is the time period used in PSS/SSS detection which is determined according to T_{PSS/SSS_sync_inter} in clause 9.3.4,

$T_{CSI-RS_SFN_inter}$ is the time period used to acquire the SFN information of the cell being measured, which is shown in Table 9.10.3.5-3 for FR1 and equals inter-frequency TSSB_time_index_inter in Clause 9.3.4 for FR2,

$T_{CSI-RS_measurement_period_inter}$: equal to a measurement period of CSI-RS based measurement given in table 9.10.3.5-1 and table 9.10.3.5-2..

$M_{meas_period_inter}$: For a UE supporting FR2 power class 1 or 5, $M_{meas_period_inter} = 8 \times N$ samples. For a UE supporting FR2 power class 2, $M_{meas_period_inter} = 5 \times N$ samples. For a UE supporting FR2 power class 3, $M_{meas_period_inter} = 5 \times N$ samples. For a UE supporting FR2 power class 4, $M_{meas_period_inter} = 5 \times N$ samples. Note that scaling factor N = [8].

$CSSF_{inter}$: it is a carrier specific scaling factor and is determined according to $CSSF_{within_gap,i}$ in clause 9.1.5 for measurement conducted within measurement gaps.

If a UE which supports concurrent measurement gaps has been configured with concurrent measurement gaps, $K_{p_CSI\text{-}RS}$ is the scaling factor for a CSI-RS frequency layer to be measured within the associated measurement gap which is defined as $K_{p_CSI\text{-}RS} = N_{total} / N_{available}$. $K_{p_CSI\text{-}RS} = 1$ for for UE not configured with concurrent measurement gaps.

- For a window W of duration max(CSI-RS period, MGRP_max), where MGRP max is the maximum MGRP across all configured per-UE MG and per-FR MG within the same FR as the CSI-RS frequency layer, and starting at the beginning of any gap occasions covering the CSI-RS resources.:
  - N_{total} is the total number of associated gap occasions covering CSI-RS resources within the window, including those overlapped with other MG occasions within the window, and
  - $N_{available}$ is the number of non-dropped associated gap occasions covering CSI-RS resources within the window W, after accounting for MG collisions by applying the selected gap collision rule.
  - Requirements do not apply if $N_{available} = 0$

Additionally, for a given CSI-RS resource, if the associated SSB is configured but not detected by the UE, or if CSI-RS configured with associated SSB but not QCL-ed to the associated SSB, the UE is not required to monitor the corresponding CSI-RS resource.

Table 9.10.3.5-1: Measurement period for CSI-RS based inter-frequency measurements with gaps (FR1)

Condition NOTE1,2	$T_{CSI\text{-}RS_measurement_period_inter}$
No DRX	$Max(200ms, ceil(8 \times K_{p_CSI\text{-}RS}) \times Max(MGRP, CSI\text{-}RS\ period)) \times CSSF_{inter}$
DRX cycle ≤ 320ms	$Max(200ms, Ceil(8 \times 1.5 \times K_{p_CSI\text{-}RS})) \times Max(MGRP, CSI\text{-}RS\ period, DRX\ cycle)) \times CSSF_{inter}$
DRX cycle > 320ms	$Ceil(8 \times K_{p_CSI\text{-}RS}) \times DRX\ cycle \times CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group. NOTE 3: If UE support concurrent gaps and multiple concurrent gaps are configured, the MGRP is the periodicity of the MG pattern associated to the CSI-RS resources of the inter-frequency layer. NOTE 4: $K_{p_CSI\text{-}RS}$ is applicable for a UE supporting concurrent gaps	

Table 9.10.3.5-2: Measurement period for CSI-RS based inter-frequency measurements with gaps (FR2)

Condition NOTE1,2	$T_{CSI\text{-}RS_measurement_period_inter}$
No DRX	$Max(400\ ms, ceil(M_{meas_period_inter} \times K_{p_CSI\text{-}RS}) \times Max(MGRP, CSI\text{-}RS\ period)) \times CSSF_{inter}$
DRX cycle ≤ 320ms	$Max(400\ ms, ceil(1.5 \times M_{meas_period_inter} \times K_{p_CSI\text{-}RS}) \times Max(MGRP, CSI\text{-}RS\ period, DRX\ cycle)) \times CSSF_{inter}$
DRX cycle > 320ms	$Ceil(M_{meas_period_inter} \times K_{p_CSI\text{-}RS}) \times DRX\ cycle \times CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group. NOTE 3: If UE support concurrent gaps and multiple concurrent gaps are configured, the MGRP is the periodicity of the MG pattern associated to the CSI-RS resources of the inter-frequency layer. NOTE 4: $K_{p_CSI\text{-}RS}$ is applicable for a UE supporting concurrent gaps	

Table 9.10.3.5-3: Time period for SFN acuisition for interfrequency CSI-RS based measurements with gaps(FR1)

Condition NOTE1,2	$T_{CSI\text{-}RS_SFN_inter}$
No DRX	$Max(200ms, ceil(5 \times K_{p_CSI\text{-}RS}) \times Max(MGRP, SMTC\ period)) \times CSSF_{inter}$

DRX cycle ≤ 320ms	Max(200ms, Ceil($5 \times 1.5 \times K_{p_CSI\text{-}RS}$) × Max(MGRP, SMTC period, DRX cycle)) × $CSSF_{inter}$
DRX cycle > 320ms	Ceil($5 \times K_{p_CSI\text{-}RS}$)× DRX cycle × $CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group. NOTE 3: If UE support concurrent gaps and multiple concurrent gaps are configured, the MGRP is the periodicity of the MG pattern associated to *associatedSSB*. NOTE 4: $K_{p_CSI\text{-}RS}$ is applicable for a UE supporting concurrent gaps	

9.11 NR measurements with autonomous gaps

9.11.1 Introduction

The requirements in this clause are applicable for CGI identification of an intra frequency and inter frequency NR target cell.

The requirements in this clause are specified for CGI identification of an NR target cell and are applicable for a UE:

- in RRC_CONNECTED state, and
- configured with SA or NR-DC or NE-DC operation mode, or with EN-DC operation mode for CGI identification requested by NR PSCell.

The overall CGI reporting delay is defined in clause 9.11.3.

9.11.2 CGI identification of an NR cell with autonomous gaps

The UE shall identify and report the CGI of a known NR target cell when requested by the network for the purpose of reportCGI. Only one cell is provided to the UE with *cellForWhichToReportCGI* for identifying the CGI.The UE may make autonomous gaps in both downlink reception and uplink transmission for receiving MIB and SIB1 message according to clause 5.5.3 of TS 38.331 [2]. Note that a UE is not required to use autonomous gap if *useAutonomousGaps* is set to false. If autonomous gaps are used for measurement with the purpose of reportCGI, regardless of whether DRX is used or not, or whether SCell(s) are configured or not, the UE shall be able to identify a new CGI of NR cell within:

$$T_{identify_CGI} = (T_{MIB} + T_{SIB1})\ ms$$

Where:

T_{MIB} is the time period used to acquire MIB message. $T_{MIB} = 6 * T_{SMTC}$ ms for target cell carrier frequency on FR1 and $T_{MIB} = 25 * T_{SMTC}$ ms for target cell carrier frequency on FR2.

T_{SIB1} is the time period used to acquire SIB1 message. $T_{SIB1} = 6 * T_{RMSI\text{-}scheduling}$ ms.

Where T_{SMTC} is the SMTC periodicity configured for the target cell measurement, and $T_{RMSI\text{-}scheduling}$ is

- the maximum between the periodicity with which the SIB1 is actually transmitted by the NR target cell and 20ms when SSB and RMSI CORESET multiplexing pattern is 1
- the maximum between the periodicity with which the SIB1 is actually transmitted by the NR target cell and T_{SMTC} when SSB and RMSI CORESET multiplexing pattern is 2 or 3.

The requirement for identifying the CGI of an NR cell within $T_{identify_CGI}$ is applicable when no DRX is used as well as when any of the DRX cycles specified in TS 38.331 [2] is used.

Within the time $T_{identify_CGI}$, over which the UE identifies the CGI of an NR cell, the UE shall fulfil interruption requirements specified in,

- Clause 8.2.1.2.16 for NR serving cells and Clause 7.32.2.15 in TS36.133 [15] for E-UTRA serving cells if the UE is configured with EN-DC operation mode,

- Clause 8.2.2.2.14 if the UE is configured with SA operation mode,
- Clause 8.2.3.2.14 for NR serving cells and Clause 7.36.2.14 in TS36.133 [15] for E-UTRA serving cells if the UE is configured with NE-DC operation mode,
- Clause 8.2.4.2.11 if the UE is configured with NR-DC operation mode.

In the requirement a cell is known if,

- During the last 5 seconds for FR1 or 3 seconds for FR2 before the reception of the report CGI command:
  - The UE has sent a valid L3-RSRP measurement report with SSB index for the target cell and
- During MIB decoding at least reported SSBs remains detectable according to the cell identification conditions specified in clauses 9.2 or 9.3 of TS 38.133, and
- During SIB1 decoding the SSB used for MIB decoding remains detectable according to the cell identification conditions specified in clauses 9.2 or 9.3 of TS 38.133, and
- During MIB decoding, the SSB for MIB decoding remains detectable with SNR $\geqslant$-3dB
- During SIB1 decoding, the PDSCH for SIB1 decoding remains detectable with SNR $\geqslant$-3dB

9.11.3 CGI reporting delay

The CGI reporting delay is defined as the time between a command that will trigger a CGI report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty of 2 x TTI_{DCCH} resulting when inserting the measurement report to the TTI of the uplink DCCH. This measurement reporting delay excludes any delay caused by lack of UL resources for UE to send the measurement report.

The CGI reporting delay shall be less than $T_{identify_CGI}$ defined in clause 9.11.2 plus RRC procedure delay defined in clause 12 in TS 38.331 [2], and additional 20ms margin if target cell is on FR2.

9.11A NR measurements with autonomous gaps for RedCap

9.11A.1 Introduction

The requirements in this clause are applicable for CGI identification of an intra frequency and inter frequency NR target cell.

The requirements in this clause are specified for CGI identification of an NR target cell and are applicable for a UE:

- in RRC_CONNECTED state, and
- configured with SA operation mode.

The overall CGI reporting delay is defined in clause 9.11A.3.

9.11A.2 CGI identification of an NR cell with autonomous gaps

The UE shall identify and report the CGI of a known NR target cell when requested by the network for the purpose of reportCGI. Only one cell is provided to the UE with *cellForWhichToReportCGI* for identifying the CGI.The UE may make autonomous gaps in both downlink reception and uplink transmission for receiving MIB and SIB1 message according to clause 5.5.3 of TS 38.331 [2]. Note that a UE is not required to use autonomous gap if *useAutonomousGaps* is set to false. If autonomous gaps are used for measurement with the purpose of reportCGI, regardless of whether DRX is used or not, the UE shall be able to identify a new CGI of NR cell within:

$$T_{identify_CGI_redcap} = (T_{MIB_redcap} + T_{SIB1_redcap})\ ms$$

Where:

For 2 Rx RedCap UE:

T_{MIB_redcap} is the time period used to acquire MIB message. $T_{MIB_redcap} = 6 * T_{SMTC}$ ms for target cell carrier frequency on FR1 and $T_{MIB_redcap} = 25 * T_{SMTC}$ ms for target cell carrier frequency on FR2.

T_{SIB1_redcap} is the time period used to acquire SIB1 message. $T_{SIB1_redcap} = 6 * T_{RMSI\text{-}scheduling}$ ms.

For 1 Rx RedCap UE:

T_{MIB_redcap} is the time period used to acquire MIB message. $T_{MIB_redcap} = 6 * T_{SMTC}$ ms for target cell carrier frequency on FR1 and $T_{MIB_redcap} = 25 * T_{SMTC}$ ms for target cell carrier frequency on FR2.

T_{SIB1_redcap} is the time period used to acquire SIB1 message. $T_{SIB1_redcap} = 12 * T_{RMSI\text{-}scheduling}$ ms.

Where T_{SMTC} is the SMTC periodicity configured for the target cell measurement, and $T_{RMSI\text{-}scheduling}$ is

- the periodicity with which the SIB1 is actually transmitted by the NR target cell when SSB and RMSI CORESET multiplexing pattern is 1
- the maximum between the periodicity with which the SIB1 is actually transmitted by the NR target cell and T_{SMTC} when SSB and RMSI CORESET multiplexing pattern is 2 or 3.

The requirement for identifying the CGI of an NR cell within $T_{identify_CGI_redcap}$ is applicable when no DRX is used as well as when any of the DRX cycles specified in TS 38.331 [2] is used.

Within the time $T_{identify_CGI_redcap}$, over which the UE identifies the CGI of an NR cell, the UE shall fulfil interruption requirements specified in,

- Clause [8.2.2.2.14] if the UE is configured with SA operation mode.

In the requirement a cell is known if,

- During the last 5 seconds for FR1 or 3 seconds for FR2 before the reception of the report CGI command:
  - The UE has sent a valid L3-RSRP measurement report with SSB index for the target cell and
- During MIB decoding at least reported SSBs remains detectable according to the cell identification conditions specified in clauses 9.2B or 9.3B of TS 38.133, and
- During SIB1 decoding the SSB used for MIB decoding remains detectable according to the cell identification conditions specified in clauses 9.2B or 9.3B of TS 38.133, and
- During MIB decoding, the SSB for MIB decoding remains detectable with SNR $\geqslant$-3dB
- During SIB1 decoding, the PDSCH for SIB1 decoding remains detectable with SNR $\geqslant$-3dB

9.11A.3 CGI reporting delay

The CGI reporting delay is defined as the time between a command that will trigger a CGI report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty of 2 x TTI_{DCCH} resulting when inserting the measurement report to the TTI of the uplink DCCH. This measurement reporting delay excludes any delay caused by lack of UL resources for UE to send the measurement report.

The CGI reporting delay shall be less than $T_{identify_CGI_redcap}$ defined in clause 9.11A.2 plus RRC procedure delay defined in clause 12 in TS 38.331 [2], and additional 20ms margin if target cell is on FR2.

9.11A.4 CGI reporting scheduling restriction

When a RedCap UE is identifying CGI of an NR cell with autonomous gaps, the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on PCell for the following slots:

- with up to K1 interruptions with interrupted slots up to X1 specified in Table 9.11A.4-1 for each interruption during MIB decoding time period T_{MIB_redcap} (ms) specified in clause 9.11A.2.

- with up to L1 interruptions with interrupted slots up to Y1 specified in Table 9.11A.4-1 during SIB1 decoding time period T_{SIB1_redcap} (ms) specified in clause 9.11A.2 for SSB and CORESET for RMSI scheduling multiplexing patterns 1.
- with up to L2 interruptions with interrupted slots up to interruption length Y2 specified in Table 9.11A.4-1 during SIB1 decoding time period T_{SIB1_redcap} (ms) specified in clause 9.11A.2 for SSB and CORESET for RMSI scheduling multiplexing patterns 2 and 3.

Where:

- K1 = 6 for the target cell carrier frequency on FR1 and K1 = 25 for the target cell carrier frequency on FR2, and
- L1 = T_{SIB1_redcap} /20 and
- L2 = T_{SIB1_redcap} /T_{SMTC}, where T_{SMTC} is the periodicity of the SMTC occasion configured for the target cell carrier.

Table 9.11A.4-1: Interruption length X1, Y1 and Y2 during measurements with autonomous gaps

μ	NR Slot length (ms) of victim cell	Interruption length X1 (slots)	Interruption length Y1 (slots)	Interruption length Y2 (slots)
0	1	6	7	6
1	0.5	12	13	10
2	0.25	24	25	19
3	0.125	48	49	37

9.12 Measurement for Propagation Delay Compensation

9.12.1 Introduction

The requirements in this clause are applicable for UE capable of RTT-based propagation delay compensation based on PRS/TRS and SRS, where the UE is configured with *measObjectRxTxDiff* in *MeasObjectToAddModList* defined in TS38.331 [2].

9.12.2 Requirements Applicability

The requirements in clause 9.12 apply for periodic triggered UE Rx-Tx time difference measurements, provided:

- If UE Rx-Tx time difference measurement is based on PRS, the related side conditions given in clause 10.1.39.2 are met for a corresponding band.
- If UE Rx-Tx time difference measurement is based on TRS, the related side conditions given in clause 10.1.39.3 are met for a corresponding band.
- SRS is configured on at least one of the PCell.

All measurement requirements specified in clause 9.12.4 shall apply when no DRX is in use as well as for when DRX is in use (clause 3.6.1) for any DRX configuration specified in TS 38.331 [2].

9.12.3 Measurement Capability

If UE Rx-Tx time difference measurement is based on PRS, the capability is as indicated by the UE in *rtt-BasedPDC-PRS-r17* in TS38.331 [2].

If UE Rx-Tx time difference measurement is based on TRS, the capability is as indicated by the UE in *rtt-BasedPDC-CSI-RS-ForTracking-r17* in TS38.331 [2].

9.12.4 Measurement period requirements

9.12.4.1 PRS Measurement Period

When UE is configured with *prs-Ref-r17* in *MeasObjectRxTxDiff*-r17 defined in TS 38.331 [2] and provided with PRS resource configuration, the UE shall be able to measure UE Rx-Tx time difference on PCell within the measurement period $T_{UERx-Tx_PRS}$, where:

$$T_{UERxTx,PRS} = \left\lceil \frac{N_{PRS}^{slot}}{N'} \right\rceil * N_{sample} * K_{layer3} * LCM(T_{PRS}, T_{DRX})$$

Where:

N_{PRS}^{slot} is the maximum number of DL PRS resources configured in a slot,

N′ is UE capability for number of DL PRS resources that it can process in a slot corresponding to *maxNumberPRS-ResourceProcessedPerSlot-r17* as specified in TS38.331 [2],

N_{sample} is the number of UE Rx-Tx time difference measurement samples and N_{sample} = 4,

T_{PRS} is the PRS resource periodicity specific for RTT-based propagation delay compensation,

T_{DRX} is the DRX cycle length when DRX is in use, 1ms otherwise.

K_{layer3} is

N_{total} / $N_{available}$, when $N_{available}$>0

Where,

- For a window W of duration LCM(T_{PRS}, MGRP_max, T_{SMTC}) and starting at the beginning of any PRS resource occasion, where T_{SMTC} is the periodicity of SMTC for intra-frequency measurement without gap and MGRP max is the maximum MGRP across all configured per-UE measurement gaps and per-FR measurement gaps within the same FR as PCell for a UE that support *concurrentMeasGap-r17* and is configured with concurrent measurement gaps, otherwise MGRP max is the MGRP of configured per-UE measurement gap or per-FR measurement gap within the same FR as PCell:
  - N_{total} is the total number of PRS resource occasions within the window, including those overlapped with measurement gap occasions or SMTC occasions within the window, and
  - $N_{available}$ is the number of PRS resource occasions that are not overlapped with:
    - For FR1: any measurement gap occasions after accounting for measurement gap collisions by applying the measurement gap collision rule in section 9.1.8.3 within the window W
    - For FR2: any measurement gap occasions after accounting for measurement gap collisions by applying the measurement gap collision rule in section 9.1.8.3 nor any SMTC occasions within the window W.

No requirements shall apply if $N_{available}$=0.

UE is only required to perform UE Rx-Tx time difference on PRS within the active DL BWP.

When UE is configured to perform UE Rx-Tx time difference measurement based on PRS, the requirements apply provided that the SCS of the PRS is same as that of the active BWP on PCell.

For FR2, the requirements apply if QCL information is provided for all the PRS resources in the resource set and for each resource one RS has QCL-TypeD.

If PRS resources overlap with Type 1A/1B/2 PPW, the UE is allowed longer measurement period to measure UE Rx-Tx time difference on PCell.

9.12.4.2 TRS Measurement Period

When UE is configured with *csi-RS-Ref-r17* in *MeasObjectRxTxDiff*-r17 defined in TS 38.331 [2] and provided with TRS resource configuration, the UE shall be able to measure UE Rx-Tx time difference on PCell within the measurement period $T_{UERx-Tx_TRS}$, where:

$$T_{UERxTx,TRS} = N_{sample} * K_{layer3} * LCM(T_{TRS}, T_{DRX})$$

Where

N_{sample} is the number of UE Rx-Tx time difference measurement samples and N_{sample} is [4],

T_{TRS} is the TRS resource periodicity specific for RTT-based propagation delay compensation,

T_{DRX} is the DRX cycle length when DRX is in use, 1ms otherwise.

K_{layer3} is

N_{total} / $N_{available}$ when $N_{available}$>0

Where,

- For a window W of duration LCM(T_{TRS}, MGRP_max, T_{SMTC}) and starting at the beginning of any TRS resource occasion, where T_{SMTC} is the periodicity of SMTC for intra-frequency measurement without gap and MGRP max is the maximum MGRP across all configured per-UE measurement gaps and per-FR measurement gaps within the same FR as PCell for a UE that support *concurrentMeasGap-r17* and is configured with concurrent measurement gaps, otherwise MGRP_max is the MGRP of configured per-UE measurement gap or per-FR measurement gap within the same FR as PCell:
  - N_{total} is the total number of TRS resource occasions within the window, including those overlapped with measurement gap occasions or SMTC occasions within the window, and
  - $N_{available}$ is the number of TRS resource occasions that are not overlapped with
    - For FR1: any measurement gap occasions after accounting for measurement gap collisions by applying the measurement gap collision rule in section 9.1.8.3 within the window W
    - For FR2: any measurement gap occasions after accounting for measurement gap collisions by applying the measurement gap collision rule in section 9.1.8.3 nor any SMTC occasions within the window W.

No requirements shall apply if $N_{available}$=0.

UE is only required to perform UE Rx-Tx time difference on TRS within the active DL BWP. When UE is configured to perform UE Rx-Tx time difference measurement based on TRS, the requirements apply provided that the SCS of the TRS is same as that of the active BWP on PCell.

For FR2, the requirements apply if QCL information is provided for all the TRS resources in the resource set and for each resource one RS has QCL-TypeD.

If TRS resources overlap with Type 1A/1B/2 PPW, the UE is allowed longer measurement period to measure UE Rx-Tx time difference on PCell.

9.12.5 Measurement Reporting Requirements

The UE shall report UE Rx-Tx time difference measurement results if UE supports *gNB-SideRTT-BasedPDC-r17*.

The measurement reporting delay excludes the delay uncertainty caused by inserting the measurement report into the TTI of the uplink DCCH. The delay uncertainty is: 2 x TTIDCCH where TTIDCCH is the duration of subframe or slot or subslot when the measurement report is transmitted on the PUSCH with subframe or slot or subslot duration. This measurement reporting delay excludes any delay caused by no UL resources for UE to send the measurement report.

The UE Rx-Tx time difference measurement values contained in measurement report shall be based on the measurement report mapping requirements specified in clause 10.1.25.3, with k = 5.

The UE Rx-Tx time difference measurement accuracy shall be fulfilled according to the accuracy requirements specified in clause 10.1.39.2 and 10.1.39.3 for PRS and TRS, respectively.

9.12.6 Scheduling availability during measurement for Propagation Delay Compensation

During measurement for Propagation Delay Compensation in an FR2 cell,

- For the case where the PRS or TRS for PDC measurement is QCLed with active TCI state for PDCCH/PDSCH, there are no scheduling restrictions due to PDC measurement performed based on PRS or TRS.
- Otherwise, the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on symbols corresponding to the PRS or TRS resource configured for PDC measurement.

9.12.7 Measurement restriction for measurement for Propagation Delay Compensation

During measurement for Propagation Delay Compensation in an FR2 cell, when the PRS or TRS for PDC measurement on one CC is in the same OFDM symbol as SSB or CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both PRS or TRS for PDC measurement and the other RS if they are not QCL-ed w.r.t. QCL-TypeD, or the QCL information is not known to UE. Longer measurement period for PRS or TRS for PDC measurement is expected.

9.13 L1-RSRP measurements for a cell with different PCI from serving cell

9.13.1 Introduction

When configured by the network, the UE shall be able to perform L1-RSRP measurements of configured measurement resources from a cell with different PCI in addition to serving cell (PCI indicated in *additionalPCI-r17*), with the measurement resources configured as SSBs of the cell with different PCI.

The UE shall be able to measure all SSB resources of the cell with different PCI in *csi-SSB-ResourceSet* within the CSI-Resource*Config* settings for the active BWP, while the *additionalPCI-r17* of the SSB resources are different from serving cell PCI. The number of resources, including the number of resources configured for serving cell L1-RSRP measurement in 9.5, does not exceed the UE capability indicated by *beamManagementSSB-CSI-RS*.

The UE shall report the measurement quantity (*reportQuantity*) and send periodic, semi-persistent or aperiodic reports, according to the higher layer parameter *reportConfigType* of each reporting setting *CSI-ReportConfig* for the active BWP.

9.13.2 Requirements Applicability

The requirements in the clause 9.13 are applicable to inter-cell beam management and inter-cell multi-TRP scenarios.

The requirements in clause 9.13 apply, provided the SSB from cell with PCI different from serving cell configured for L1-RSRP if the following conditions are met:

- the number of cells with PCI different from seving cells N_{max} = 1 for FR2 and N_{max} = maxNrofAdditionalPCI for FR1. Where, maxNrofAdditionalPCI is defined in TS 38.331 [2].

- The SSB from the cell with different PCI completely contained in the active BWP or associated with initial downlink BWP of the UE
- The SSB of the cell with different PCI from serving cell has the same SCS, SFN offset and center frequency as the SSB of the serving cell
- The timing difference of arrival at UE between the SSBs of serving cell and cell with different PCI is less than CP length of the corresponding SCS
- The cell with different PCI from serving cell is known
- The SSB resources configured for L1-RSRP measurements are measurable

An SSB resource configured for L1-RSRP for cell with different PCI from serving cell shall be considered measurable when for each relevant SSB the following conditions are met:

- L1-RSRP related side conditions given in clauses 10.1.19.1 and 10.1.20.1 for FR1 and FR2, respectively, for a corresponding band,
- SSB_RP and SSB Ês/Iot according to Annex B.2.4.1 for a corresponding band.

The cell with different PCI from serving cell is considered as known if the following conditions are met in this requirement:

- The UE has sent a valid L3 measurement report during the last 5 seconds, and
- The SSB from the cell with different PCI remains detectable according to the cell identification requirements specified in clause 9.2.

Otherwise, the cell is unknown.

9.13.3 Measurement Reporting Requirements

The UE shall send L1-RSRP reports only for report configurations configured for the active BWP.

The UE shall report the L1-RSRP value as a 7-bit value in the range [-140, -44] dBm with 1dB step size according to clause 10.1.19 for FR1 and 10.1.20 for FR2 if *nrofReportedRS* is configured to one. If *nrofReportedRS* is configured to be larger than one, or if *groupBasedBeamReporting-r17* is enabled, the UE shall use differential L1-RSRP based reporting as defined in clause 10.1.19 for FR1 and 10.1.20 for FR2. The differential L1-RSRP is quantized to a 4-bit value with 2dB step size. The mapping between the reported L1-RSRP value and the measured quantity is described in 10.1.6.

In EN-DC and NE-DC operation, when the UE is configured to perform E-UTRA SRS carrier-based switching an additional delay can be expected in FR1 if the UE is capable of per-FR gap, or an additional delay can be expected in both FR1 and FR2 if the UE is not capable of per-FR gap.

9.13.3.1 Periodic Reporting

Reported L1-RSRP measurements contained in periodic L1-RSRP measurement reports shall meet the requirements in clauses 10.1.19 for FR1 and 10.1.20 for FR2, respectively.

The UE shall only send periodic L1-RSRP measurement reports for an active BWP.

The UE shall transmit the periodic L1-RSRP reporting on PUCCH over the air interface according to the periodicity defined in clause 5.2.1.4 in TS 38.214 [26].

9.13.3.2 Semi-Persistent Reporting

Reported L1-RSRP measurements contained in a Semi-Persistent L1-RSRP measurement report shall meet the requirements in clauses 10.1.19 for FR1 and 10.1.20 for FR2, respectively. This requirement applies for semi-persistent L1-RSRP reports send on PUSCH or PUCCH.

The UE shall only send semi-persistent L1-RSRP measurement reports on PUSCH, if a DCI request has been received.

The UE shall only send semi-persistent L1-RSRP measurement reports on PUCCH, if an activation command [7] has been received.

The UE shall transmit the semi-persistent L1-RSRP reporting on PUSCH or PUCCH over the air interface according to the periodicity defined in clause 5.2.1.4 in TS 38.214 [26].

9.13.3.3 Aperiodic Reporting

Reported L1-RSRP measurements contained in aperiodic triggered, aperiodic triggered periodic and aperiodic triggered semi-persistent L1-RSRP reports shall meet the requirements in clauses 10.1.19 for FR1 and 10.1.20 for FR2, respectively.

The UE shall only send aperiodic L1-RSRP measurement report if a DCI trigger has been received.

After the UE receives CSI request in DCI, the UE shall transmit the aperiodic L1-RSRP reporting on PUSCH over the air interface at the time specified according to clause 6.1.2.1 in TS 38.214 [26].

9.13.4 L1-RSRP measurement requirements

9.13.4.1 Inter-cell SSB based L1-RSRP Reporting

If a cell with PCI different from serving cell is known according 9.13.2, the UE shall be capable of performing L1-RSRP measurements based on the configured SSB resource for L1-RSRP computation, and the UE physical layer shall be capable of reporting L1-RSRP measured over the measurement period of $T_{L1\text{-}RSRP_Measurement_Period_SSB_CDP}$. The requirements specified in this clause are only applicable when

- *highSpeedMeasFlag-r16* is not configured, and
- *highSpeedMeasFlagFR2-r17* is not configured, and
- highSpeedMeasCA-Scell-r17 is not configured

Editor's Note: FFS the requirements applicability when L1-RSRP measurement resources are overlapped with concurrent gaps.

The value of $T_{L1\text{-}RSRP_Measurement_Period_SSB_CDP}$ is defined in Table 9.13.4.1-1 for FR1, The value of $T_{L1\text{-}RSRP_Measurement_Period_SSB_CDP}$ is defined in Table 9.13.4.1-2 for FR2 when *highSpeedMeasFlagFR2-r17* is not configured, where

- M=1 if higher layer parameter *timeRestrictionForChannelMeasurement* is configured, and M=3 otherwise
- N= 8.

For FR1,

- $P=\frac{1}{1-\frac{T_{SSB_CDP}}{MRGP}}$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the SSB; and
- P=1 when in the monitored cell there are no measurement gaps overlapping with any occasion of the SSB.

For FR2,

- $P_2=\frac{1}{1-\frac{T_{SSB_CDP}}{T_{SMTCperiod}}}$, when SSB is not overlapped with measurement gap and SSB is partially overlapped with SMTC occasion ($T_{SSB_CDP} < T_{SMTCperiod}$).
- $P_2=\frac{1}{1-\frac{T_{SSB_CDP}}{MGRP}-\frac{T_{SSB_CDP}}{T_{SMTCperiod}}}$, when SSB is partially overlapped with measurement gap and SSB is partially overlapped with SMTC occasion ($T_{SSB_CDP} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and
  - $T_{SMTCperiod} \neq MGRP$ or

  - $T_{SMTCperiod}$ = MGRP and $T_{SSB_CDP} < 0.5*T_{SMTCperiod}$

- $P_2 = \frac{1}{1-\frac{T_{SSB_CDP}}{min(T_{SMTCperiod},MGRP)}}$,when SSB is partially overlapped with measurement gap (T_{SSB_CDP} <MGRP) and SSB is partially overlapped with SMTC occasion ($T_{SSB_CDP} < T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with measurement gap.

- [If SSB resource from serving cell is configured for L1-RSRP measurements, and P_1 is valid accoding to 9.5.4.1, and any symbol of the SSBs from serving cell and cell with different PCI are overlapping or adjacent (in time domain)

  - $P = \frac{P_2}{1-\frac{P_2*T_{SSB_CDP}}{P_1*T_{SSB_SC}}}$, if $P_2*T_{SSB_CDP} < P_1*T_{SSB_SC}$.

  - $P = P_2$, if $P_2*T_{SSB_CDP} > P_1*T_{SSB_SC}$.

  - $P = 2*P_2$, if $P_1*T_{SSB_SC} = P_2*T_{SSB_CDP}$.

- Otherwise,]$P = P_2$Where:

  - T_{SSB_CDP} = SSB periodicity of the cell with PCI different from serving cell

  - $T_{SMTCperiod}$ = the configured SMTC period

  - T_{SSB_SC} = ssb-periodicityServingCell of the serving cell

If the high layer in TS 38.331 [2] signaling of *smtc2* is configured, $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc2*; Otherwise $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc1*. $T_{SMTCperiod}$ is the shortest SMTC period among all CCs in the same FR2 band, provided the SMTC offset of all CCs in FR2 have the same offset.

Longer evaluation period would be expected if the combination of SSB, SMTC occasion and measurement gap configurations does not meet pervious conditions.

For either an FR1 or FR2 cell with PCI different from serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 cell with PCI different from serving cell, longer L1 RSRP measurement period would be expected during the period $T_{identify_CGI,E\text{-}UTRAN}$ when the UE is requested to decode an LTE CGI.

Table 9.13.4.1-1: Inter-cell L1-RSRP measurement period $T_{L1\text{-}RSRP_Measurement_Period_SSB_CDP}$ for known cells with different PCIs in FR1

Configuration	$T_{L1\text{-}RSRP_Measurement_Period_SSB_CDP}$ (ms)
non-DRX	max(T_{Report}, ceil(M*P)*T_{SSB_CDP})
DRX cycle ≤ 320ms	max(T_{Report}, ceil(K *M*P)*max(T_{DRX},T_{SSB_CDP}))
DRX cycle > 320ms	ceil(M*P)*T_{DRX}
Note 1: T_{SSB_CDP} is the periodicity of the SSB-Index configured for inter-cell L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting. Note 2: K = 1.5.	

Table 9.13.4.1-2: Inter-cell L1-RSRP measurement period $T_{L1\text{-}RSRP_Measurement_Period_SSB_CDP}$ for known cells with different PCIs in FR2

Configuration	$T_{L1\text{-}RSRP_Measurement_Period_SSB_CDP}$ (ms)
non-DRX	max(T_{Report}, ceil(M*P*N)*T_{SSB_CDP})
DRX cycle ≤ 320ms	max(T_{Report}, ceil(1.5*M*P*N)*max(T_{DRX},T_{SSB_CDP}))
DRX cycle > 320ms	ceil(1.5*M*P*N)*T_{DRX}
Note: T_{SSB_CDP} is the periodicity of the SSB-Index configured for inter-cell L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting.	

9.13.5 Measurement restriction for L1-RSRP measurement

The UE is required to be capable of measuring SSB for L1-RSRP without measurement gaps. The UE is required to perform the SSB measurements with measurement restrictions as described in the following clauses.

Unless explicitly stated, the SSB to be measured for L1-RSRP measurement is transmitted from cell(s) with PCI different from serving cell(s).

9.13.5.1 Measurement restriction for SSB based L1-RSRP

For FR1,

when the SSB for L1-RSRP measurement is in the same OFDM symbol as SSB transmitted from serving cell(s) for RLM, BFD, CBD or L1-RSRP measurement,

- UE shall be able to measure the SSB for L1-RSRP measurement without any restriction;

when the SSB for L1-RSRP measurement is in the same OFDM symbol as CSI-RS transmitted from serving cell(s) for RLM, BFD, CBD or L1-RSRP measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for L1-RSRP measurement without any restriction;
- If SSB and CSI-RS have different SCS,
  - If UE supports *simultaneousRxDataSSB-DiffNumerology*, UE shall be able to measure the SSB for L1-RSRP measurement without any restriction;
  - If UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both SSB for L1-RSRP measurement and CSI-RS. Longer measurement period for SSB based L1-RSRP measurement is expected, and no requirements are defined.

For FR2,

when the SSB for L1-RSRP measurement on one CC is in the same OFDM symbol as SSB transmitted from serving cell(s) for RLM, BFD, or CBD measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both the two SSBs. Longer measurement period for SSB based L1-RSRP measurement is expected, and no requirements are defined.

when the SSB for L1-RSRP measurement on one CC is in the same OFDM symbol as SSB for L1-RSRP measurement on the different CCs in the same band, UE is required to measure one of but not both the two SSBs. Longer measurement period for SSB based L1-RSRP measurement is expected, and no requirements are defined.

when the SSB for L1-RSRP measurement on one CC is in the same OFDM symbol as CSI-RS transmitted from serving cell(s) for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both SSB for L1-RSRP measurement and CSI-RS. Longer measurement period for SSB based L1-RSRP measurement is expected, and no requirements are defined.

For FR2, if the network configures same or mixed numerology between SSB for L1-RSRP measurement on one FR2 band and CSI-RS for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement on the other FR2 band, UE shall be able to perform the related SSB based measurements in one band without any measurement restrictions in the other band, provided that UE is capable of independent beam management on this FR2 band pair.

9.13.6 Scheduling availability of UE during L1-RSRP measurement

Scheduling availability restrictions described in the following clauses apply when UE is performing L1-RSRP measurement on cell(s) with PCI different from serving cell, and UE is receiving PDCCH/PDSCH from serving cell and/or cell(s) with different PCI.

9.13.6.1 Scheduling availability of UE performing L1-RSRP measurement with a same subcarrier spacing as PDSCH/PDCCH on FR1

There are no scheduling restrictions due to L1-RSRP measurement performed on SSB as RS for L1-RSRP measurement with the same SCS as PDSCH/PDCCH in FR1.

9.13.6.2 Scheduling availability of UE performing L1-RSRP measurement with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UEs which support *simultaneousRxDataSSB-DiffNumerology* [14] there are no restrictions on scheduling availability due to L1-RSRP measurement based on SSB as RS for L1-RSRP measurement. For UEs which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to L1-RSRP measurement based on SSB configured for L1-RSRP measurement.

- The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on symbols corresponding to the SSB indexes configured for L1-RSRP measurement.

When intra-band carrier aggregation in FR1 is configured, the scheduling restrictions apply to cell(s) in the same band on the symbols that fully or partially overlap with restricted symbols. When inter-band carrier aggregation within FR1 is configured, there are no scheduling restrictions on FR1 cells configured in other bands than the bands in which the cell where L1-RSRP measurement is performed is configured.

9.13.6.3 Scheduling availability of UE performing L1-RSRP measurement on FR2

The following scheduling restriction applies due to L1-RSRP measurement.

- The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on symbols corresponding to the SSB indexes configured for L1-RSRP measurement.

When intra-band carrier aggregation in FR2 is performed, the scheduling restrictions is performed apply to cell(s) in the band on the symbols that fully or partially overlap with restricted symbols.

When inter-band carrier aggregation in FR2 is performed, there are no scheduling restrictions on FR2 cells in the bands due to L1-RSRP measurement performed on FR2 cell(s) in different band(s), provided that UE is capable of independent beam management on this FR2 band pair. Additionally, there is no scheduling restriction if the UE is configured with different numerology between SSB on one FR2 band and data on the other FR2 band provided the UE is configured for IBM operation for the band pair.

If following conditions are met,

- UE has been notified about system information update through paging,
- The gap between UE’s reception of PDCCH that UE monitors in the Type 2-PDCCH CSS set and that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots,

For the SSB and CORESET for RMSI scheduling multiplexing patterns 3, UE is expected to receive the PDCCH that UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured for L1-RSRP measurement; and

For the SSB and CORESET for RMSI scheduling multiplexing patterns 2, UE is expected to receive PDSCH that corresponds to the PDCCH that UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured for L1-RSRP measurement.

9.13.6.4 Scheduling availability of UE performing L1-RSRP measurement on FR1 or FR2 in case of FR1-FR2 inter-band CA

There are no scheduling restrictions on FR1 cell(s) due to L1-RSRP measurement performed on FR2 cell(s).

There are no scheduling restrictions on FR2 cell(s) due to L1-RSRP measurement performed on FR1 cell(s).

9.13.6.5 Scheduling availability of UE performing L1-RSRP measurement in TDD bands on FR1

When UE performs L1-RSRP measurement on cell with different PCI from serving cell in a TDD band, the following restrictions apply due to L1-RSRP measurement

- The UE is not expected to transmit PUCCH/PUSCH/SRS on symbols corresponding to the SSB indexes configured for L1-RSRP measurement, where the transmission of PUCCH/PUSCH/SRS may be on serving cell(s) and cell(s) with PCI different from serving cell(s), and restricted symbols may partially or fully overlap with UL symbols

10 Measurement Performance requirements

10.1 NR measurements

10.1.1 Introduction

The requirements in clause 10.1 apply as follows:

- intra-frequency requirements apply for PCell measurements in SA, NR-DC, or NE-DC operaion mode,
- intra-frequency requirements apply for PSCell measurements in NR-DC or EN-DC operaion mode,
- intra-frequency requirements apply for SCell measurements in SA operation mode with NR CA or any MR-DC operaion mode with NR CA,
- inter-frequency requirements apply for non-serving cell measurements on NR carrier frequencies.
- inter-frequency requirements apply for measurements from one cell on a frequency compared to the measurement from another cell on a different frequency.

In the requirements of clause 10.1, the exceptions for side conditions apply as follows:

- for the UE capable of CA but not configured with any SCell, the applicable exceptions for side conditions are specified in Annex B, clause B.3.2.1 for UE supporting CA in FR1, and clause B.3.2.3 for UE supporting CA in FR2, respectively;
- for the UE capable of CA and configured with at least one SCell, the applicable exceptions for side conditions are specified in Annex B, clause B.3.2.2 for UE configured with CA in FR1, and clause B.3.2.4 for UE supporting CA in FR2 respectively;
- for the UE capable of SUL but not configured with SUL, the applicable exceptions for side conditions are specified in Annex B, clause B.3.4.1 for UE supporting SUL in FR1;
- for the UE capable of SUL and configured with at least one SUL, the applicable exceptions for side conditions are specified in Annex B, clause B.3.4.2 for UE configured with SUL in FR1.

10.1.2 Intra-frequency RSRP accuracy requirements for FR1

10.1.2.1 Intra-frequency SS-RSRP accuracy requirements

10.1.2.1.1 Absolute SS-RSRP Accuracy

Unless otherwise specified, the requirements for absolute accuracy of SS-RSRP in this clause apply to a cell on the same frequency as that of the serving cell in FR1. The accuracy requirements in this clause are also applicable when *highSpeedMeasFlag-r16* or *highSpeedMeasCA-Scell-r17* is configured.

The accuracy requirements in Table 10.1.2.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band for each relevant SSB.

Table 10.1.2.1.1-1: SS-RSRP Intra frequency absolute accuracy in FR1

Accuracy		Conditions			
Normal condition	Extreme condition	SSB $\hat{E}_s/I_{ot}$	Io [Note 1] range		
			NR operating band groups [Note 2]	Minimum Io	Maximum Io

dB	dB	dB		dBm / SCS_{SSB}		dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±4.5	±9	≥-6	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-70
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-70
			NR_TDD_FR1_C	-120	-117	N/A	-70
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-70
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-70
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-70
			NR_FDD_FR1_G	-118	-115	N/A	-70
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-70
±8	±11	≥-6	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H	N/A	N/A	-70	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2.							

10.1.2.1.2 Relative SS-RSRP Accuracy

The relative accuracy of SS-RSRP is defined as the SS-RSRP measured from one cell compared to the SS-RSRP measured from another cell on the same frequency, or between any two SS-RSRP levels measured on the same cell in FR1. The accuracy requirements in this clause are also applicable when *highSpeedMeasFlag-r16* or *highSpeedMeasCA-Scell-r17* is configured.

The accuracy requirements in Table 10.1.2.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band for each relevant SSB.

Table 10.1.2.1.2-1: SS-RSRP Intra frequency relative accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB $\hat{E}_s/I_{ot}$ Note 2	Io Note 1 range				
			NR operating band groups Note 4	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±2	±3	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50

			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
±3	±3	≥-6	Note 3	Note 3	Note 3	N/A	Note 3
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: The parameter SSB Ês/Iot is the minimum SSB Ês/Iot of the pair of cells to which the requirement applies. NOTE 3: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement. NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.							

10.1.2.2 Void

10.1.2.3 Intra-frequency CSI-RSRP accuracy requirements

10.1.2.3.1 Absolute CSI-RSRP Accuracy

Unless otherwise specified, the requirements for absolute accuracy of CSI-RSRP in this clause apply to a cell where the CSI-RS resources to be measured have the same center frequency as the CSI-RS resources indicated for measurement in the serving cell in FR1.

The accuracy requirements in Table 10.1.2.3.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band for each associated SSB.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.8 for a corresponding Band for each relevant CSI-RS to be measured.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3. The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.2.3.1-1.- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.

Note: The reference measurement timing for one layer for intra-frequency measurement is serving cell timing.

Table 10.1.2.3.1-1: CSI-RSRP Intra frequency absolute accuracy in FR1

Accuracy		**Conditions**						
			Io [Note 1] range					
Normal condition	**Extreme condition**	**CSI-RS Ês/Iot**	**NR operating band groups [Note 2]**	**Minimum Io**				**Maximum Io**
				dBm / SCS_{CSI-RS}				
dB	**dB**	**dB**		**SCS_{CSI-RS} = 15 kHz**	**SCS_{CSI-RS} = 30 kHz**	**SCS_{CSI-RS} = 60 kHz**	**$dBm/BW_{Channel}$**	**$dBm/BW_{Channel}$**
±4.5	±9	≥-6	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-70
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-70
			NR_TDD_FR1_C	-120	-117	-114	N/A	-70
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-70
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-70
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-70
			NR_FDD_FR1_G	-118	-115	-112	N/A	-70
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-70

±8	±11	≥-6	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H	N/A	N/A	N/A	-70	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2.								

10.1.2.3.2 Relative CSI-RSRP Accuracy

The relative accuracy of CSI-RSRP is defined as the CSI-RSRP measured from one cell compared to the CSI-RSRP measured from another cell on the same center frequency, or between any two CSI-RSRP levels measured on the same cell in FR1.

The accuracy requirements in Table 10.1.2.3.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band for each associated SSB.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.8 for a corresponding Band for each relevant CSI-RS to be measured.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3. The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.2.3.2-1. - The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.

Note: The reference measurement timing for one layer for intra-frequency measurement is serving cell timing.

Table 10.1.2.3.2-1: CSI-RSRP Intra frequency relative accuracy in FR1

Accuracy		**Conditions**						
Normal condition	**Extreme condition**	**CSI-RS Ês/Iot** Note 2	**Io** Note 1 **range**					
			NR operating band groups Note 4	**Minimum Io**				**Maximum Io**
dB	**dB**	**dB**		**dBm / SCS_{CSI-RS}**			**dBm/$BW_{Channel}$**	**dBm/$BW_{Channel}$**
				SCS_{CSI-RS} = 15 kHz	**SCS_{CSI-RS} = 30 kHz**	**SCS_{CSI-RS} = 60 kHz**		
±2	±3	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	-114	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	-112	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-50
±3	±3	≥-6	Note 3	Note 3	Note 3	Note 3	N/A	Note 3
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: The parameter CSI-RS Ês/Iot is the minimum CSI-RS Ês/Iot of the pair of cells to which the requirement applies. NOTE 3: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement. NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.								

10.1.2B Intra-frequency RSRP accuracy requirements for FR1 for CA/DC Idle Mode Measurements

10.1.2B.1 Intra-frequency SS-RSRP accuracy requirements

The requirements in this clause are applicable for a UE:

- in state RRC_IDLE or RRC INACTIVE
- that is synchronised to the cell that is measured.

The requirements are for absolute accuracy of SS-RSRP.

10.1.2B.1.1 Absolute SS-RSRP Accuracy

Unless otherwise specified, the requirements for absolute accuracy of SS-RSRP in this clause apply to the serving cell in FR1.

The accuracy requirements in Table 10.1.2B.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.1.2 for a corresponding Band for each relevant SSB.

Table 10.1.2B.1.1-1: SS-RSRP Intra frequency absolute accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/Iot	Io [Note 1] range				
			NR operating band groups [Note 2]	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±6	±10.5	≥-4	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-70
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-70
			NR_TDD_FR1_C	-120	-117	N/A	-70
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-70
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-70
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-70
			NR_FDD_FR1_G	-118	-115	N/A	-70
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-70
±9.5	±12.5	≥-4	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H	N/A	N/A	-70	-50

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.

NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2.

10.1.2C Intra-frequency RSRP accuracy requirements for FR1 SAN

10.1.2C.1 Intra-frequency SS-RSRP accuracy requirements

10.1.2C.1.1 Absolute SS-RSRP Accuracy

Unless otherwise specified, the requirements for absolute accuracy of SS-RSRP in this clause apply to a cell on the same frequency as that of the serving cell in FR1.

The accuracy requirements in Table 10.1.2C.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band for each relevant SSB.
- Valid information for the SAN serving the target cell has been provided.

Table 10.1.2C.1.1-1: SS-RSRP Intra frequency absolute accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB $\hat{E}_s/I_{ot}$	Io [Note 1] range				
			NR operating band groups [Note 2]	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±[4.5]	±[9]	≥-6	NR_FDD_SAB_FR1_A	-121	-118	N/A	-70
±[8]	±[11]	≥-6	NR_FDD_SAB_FR1_A	N/A	N/A	-70	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2.							

10.1.2C.1.2 Relative SS-RSRP Accuracy

The relative accuracy of SS-RSRP is defined as the SS-RSRP measured from one cell compared to the SS-RSRP measured from another cell on the same frequency, or between any two SS-RSRP levels measured on the same cell in FR1.

The accuracy requirements in Table 10.1.2C.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band for each relevant SSB.
- Valid information for the SAN serving the target cell has been provided.

Table 10.1.2C.1.2-1: SS-RSRP Intra frequency relative accuracy in FR1

Accuracy		Conditions			
Normal condition	Extreme condition	SSB $\hat{E}_s/I_{ot}$ [Note 2]	Io [Note 1] range		
			NR operating band groups [Note 4]	Minimum Io	Maximum Io

dB	dB	dB		dBm / SCS_{SSB}		dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±[2]	±[3]	≥-3	NR_FDD_SAB_FR1_A	-121	-118	N/A	-50
±[3]	±[3]	≥-6	Note 3	Note 3	Note 3	N/A	Note 3
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: The parameter SSB Ês/Iot is the minimum SSB Ês/Iot of the pair of cells to which the requirement applies. NOTE 3: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement. NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.							

10.1.3 Intra-frequency RSRP accuracy requirements for FR2

10.1.3.1 Intra-frequency SS-RSRP accuracy requirements

10.1.3.1.1 Absolute SS-RSRP Accuracy

Unless otherwise specified, the requirements for absolute accuracy of SS-RSRP in this clause apply to a cell on the same frequency as that of the serving cell in FR2.

The accuracy requirements in Table 10.1.3.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band for each relevant SSB.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.3.1.1-1: SS-RSRP Intra frequency absolute accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	SSB Ês/Iot	Io [Note 2] range		
			Minimum Io		Maximum Io
dB	dB	dB	dBm / SCS_{SSB} [Note 1]	dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
			SCS_{SSB} = 120kHz / SCS_{SSB} = 240kHz		
±6	±9	≥-6	Same value as SSB_RP in Table B.2.2-2, according to UE Power class, operating band and angle of arrival	N/A	-70
±8	±11		N/A	-70	-50
Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival. Note 2: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth. Note 3: In the test cases, the SSB Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.					

10.1.3.1.2 Relative SS-RSRP Accuracy

The relative accuracy of SS-RSRP is defined as the SS-RSRP measured from one cell compared to the SS-RSRP measured from another cell on the same frequency, or between any two SS-RSRP levels measured on the same cell in FR2.

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band for each relevant SSB.

- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.3.1.2-1: SS-RSRP Intra frequency relative accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	SSB Ês/Iot	Io Note 2 range		
			Minimum Io		Maximum Io
dB	dB	dB	dBm / SCS_{SSB} Note 1		$dBm/BW_{Channel}$
			SCS_{SSB} = 120kHz	SCS_{SSB} = 240kHz	
±6	±9	≥-6	Same value as SSB_RP in Table B.2.2-2, according to UE Power class, operating band and angle of arrival		-50

Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.
Note 2: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.
Note 3: In the test cases, the SSB Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.
Note 4: The parameter SSB Ês/Iot is the minimum SSB Ês/Iot of the pair of cells to which the requirement applies.

10.1.3.2 Void

10.1.3.3 Intra-frequency CSI-RSRP accuracy requirements

10.1.3.3.1 Absolute CSI-RSRP Accuracy

Unless otherwise specified, the requirements for absolute accuracy of CSI-RSRP in this clause apply to a cell where the CSI-RS resources to be measured have the same center frequency as the CSI-RS resources indicated for measurement in the serving cell in FR2.

The accuracy requirements in Table 10.1.3.3.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band for each associated SSB(s).
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.8 for a corresponding Band for each relevant CSI-RS to be measured.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3. The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.3.3.1-1.
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.

Note: The reference measurement timing for one layer for intra-frequency measurement is serving cell timing.

- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.3.3.1-1: CSI-RSRP Intra frequency absolute accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	CSI-RS Ês/Iot	Io [Note 2] range		
			Minimum Io		Maximum Io
dB	dB	dB	dBm / SCS_{CSI-RS} [Note 1]		dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
			SCS_{CSI-RS} = 60kHz	SCS_{CSI-RS} = 120kHz		
±6	±9	≥-6	Same value as CSI-RS_RP in Table B.2.8-2, according to UE Power class, operating band and angle of arrival		N/A	-70
±8	±11		N/A		-70	-50
Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival. Note 2: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth. Note 3: In the test cases, the CSI-RS Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.						

10.1.3.3.2 Relative CSI-RSRP Accuracy

The relative accuracy of CSI-RSRP is defined as the CSI-RSRP measured from one cell compared to the CSI-RSRP measured from another cell on the same center frequency, or between any two CSI-RSRP levels measured on the same cell in FR2.

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band for each associated SSB(s).
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.8 for a corresponding Band for each CSI-RS to be measured.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3. The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.3.3.2-1.
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.

Note: The reference measurement timing for one layer for intra-frequency measurement is serving cell timing.

- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.3.3.2-1: CSI-RSRP Intra frequency relative accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	CSI-RS Ês/Iot	Io [Note 2] range		
			Minimum Io		Maximum Io
dB	dB	dB	dBm / SCS_{CSI-RS} [Note 1]		dBm/$BW_{Channel}$
			SCS_{CSI-RS} = 60kHz	SCS_{CSI-RS} = 120kHz	
±6	±9	≥-6	Same value as CSI-RS_RP in Table B.2.8-2, according to UE Power class, operating band and angle of arrival		-50
Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival. Note 2: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.					

Note 3:	In the test cases, the CSI-RS Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.
Note 4:	The parameter CSI-RS Ês/Iot is the minimum CSI-RS Ês/Iot of the pair of cells to which the requirement applies.

10.1.3B Intra-frequency RSRP accuracy requirements for FR2 for CA/DC Idle Mode Measurements

10.1.3B.1 Intra-frequency SS-RSRP accuracy requirements

The requirements in this clause are applicable for a UE:

- in state RRC_IDLE or RRC INACTIVE
- that is synchronised to the cell that is measured.

The requirements are for absolute accuracy of SS-RSRP.

10.1.3B.1.1 Absolute SS-RSRP Accuracy

Unless otherwise specified, the requirements for absolute accuracy of SS-RSRP in this clause apply to the serving cell in FR2.

The accuracy requirements in Table 10.1.3B.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.1.2 for a corresponding Band for each relevant SSB.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.3B.1.1-1: SS-RSRP Intra frequency absolute accuracy in FR2

Accuracy		**Conditions**			
Normal condition	**Extreme condition**	**SSB Ês/Iot**	**Io Note 2 range**		
			Minimum Io		**Maximum Io**
dB	**dB**	**dB**	**dBm / SCS_{SSB} Note 1**	**dBm/$BW_{Channel}$**	**dBm/$BW_{Channel}$**
			SCS_{SSB} = 120kHz / **SCS_{SSB} = 240kHz**		
±7.5	±10.5	≥-4	Same value as SSB_RP in Table B.2.2-2, according to UE Power class, operating band and angle of arrival	N/A	-70
±9.5	±12.5		N/A	-70	-50

Note 1:	Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.
Note 2:	Io specified at the Reference point and assumed to have constant EPRE across the bandwidth.
Note 3:	In the test cases, the SSB Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.

10.1.4 Inter-frequency RSRP accuracy requirements for FR1

10.1.4.1 Inter-frequency SS-RSRP accuracy requirements

10.1.4.1.1 Absolute Accuracy of SS-RSRP in FR1

The requirements for absolute accuracy of SS-RSRP in this clause apply to a cell on a frequency in FR1 that has different carrier frequency from the serving cell. The accuracy requirements in this clause are also applicable when *highSpeedMeasInterFreq-r17* is configured.

The accuracy requirements in Table 10.1.4.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant SSB.

Table 10.1.4.1.1-1: SS-RSRP Inter frequency Absolute accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB $\hat{E}_s/I_{ot}$ Note 2	Io Note 1 range				
			NR operating band groups Note 3	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±4.5	±9	≥-6	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-70
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-70
			NR_TDD_FR1_C	-120	-117	N/A	-70
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-70
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-70
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-70
			NR_FDD_FR1_G	-118	-115	N/A	-70
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-70
±8	±11	≥-6	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H	N/A	N/A	-70	-50

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: Void
NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2.

10.1.4.1.2 Relative Accuracy of SS-RSRP in FR1

The relative accuracy of SS-RSRP in inter frequency case is defined as the RSRP measured from one cell on a frequency in FR1compared to the RSRP measured from another cell on a different frequency in FR1. The accuracy requirements in this clause are also applicable when *highSpeedMeasInterFreq-r17* is configured.

The accuracy requirements in Table 10.1.4.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] Clause 7.3 for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant SSB.
- $|SSB_RP1_{dBm} - SSB_RP2_{dBm}| \leq 27$ dB
- |Channel 1_Io -Channel 2_Io | ≤ 20 dB

Table 10.1.4.1.2-1: SS-RSRP Inter frequency relative accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/Iot Note 2	Io Note 1 range				
			NR operating band groups Note 3	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±4.5	±6	≥-6	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The parameter SSB Ês/Iot is the minimum SSB Ês/Iot of the pair of cells to which the requirement applies.
NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2.

10.1.4.2 Void

10.1.4.3 Inter-frequency CSI-RSRP accuracy requirements

10.1.4.3.1 Absolute Accuracy of CSI-RSRP in FR1

The requirements for absolute accuracy of CSI-RSRP in this clause apply to a cell where the CSI-RS resources to be measured have the different center frequency as the CSI-RS resources indicated for measurement in the serving cell in FR1.

The accuracy requirements in Table 10.1.4.3.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant SSB.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.9 for a corresponding Band for each relevant CSI-RS to be measured.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3. The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.4.3.1-1.

- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.

Note: The reference measurement timing for one layer for inter-frequency measurement is up to UE implementation and shall be based on the timing of one of the target cells.

Table 10.1.4.3.1-1: CSI-RSRP Inter frequency Absolute accuracy in FR1

Accuracy		Conditions						
Normal condition	Extreme condition	CSI-RS Ês/Iot	Io [Note 1] range					
			NR operating band groups [Note 2]	Minimum Io				Maximum Io
dB	dB	dB		dBm / SCS_{CSI-RS}			dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
				SCS_{CSI-RS} = 15 kHz	SCS_{CSI-RS} = 30 kHz	SCS_{CSI-RS} = 60 kHz		
±4.5	±9	≥-6	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-70
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-70
			NR_TDD_FR1_C	-120	-117	-114	N/A	-70
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-70
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-70
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-70
			NR_FDD_FR1_G	-118	-115	-112	N/A	-70
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-70
±8	±11	≥-6	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H	N/A	N/A	N/A	-70	-50

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2.

10.1.4.3.2 Relative Accuracy of CS-RSRP in FR1

The relative accuracy of CSI-RSRP in inter frequency case is defined as the CSI-RSRP measured from one cell on a frequency in FR1compared to the CSI-RSRP measured from another cell on a different frequency in FR1.

The accuracy requirements in Table 10.1.4.3.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] Clause 7.3 for reference sensitivity are fulfilled.

- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant SSB.

- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.9 for a corresponding Band for each relevant CSI-RS to be measured.

- The bandwidth of CSI-RS is 48 PRBs and the density is 3. The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.4.3.2-1.

- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.

  - Note: The reference measurement timing for one layer for inter-frequency measurement is up to UE implementation and shall be based on the timing of one of the target cells.

- $|CSI_RP1_{dBm} - CSI_RP2_{dBm}| \leq 27$ dB

- |Channel 1_Io -Channel 2_Io | ≤ 20 dB

Table 10.1.4.3.2-1: CSI-RSRP Inter frequency relative accuracy in FR1

Accuracy		Conditions						
Normal condition	Extreme condition	CSI-RS Ês/Iot Note 2	Io Note 1 range					
			NR operating band groups Note 4	Minimum Io				Maximum Io
dB	dB	dB		dBm / SCS_{CSI-RS}			dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
				SCS_{CSI-RS} = 15 kHz	SCS_{CSI-RS} = 30 kHz	SCS_{CSI-RS} = 60 kHz		
±4.5	±6	≥-6	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	-114	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	-112	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-50

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The parameter CSI-RS Ês/Iot is the minimum CSI-RS Ês/Iot of the pair of CSI-RS resources to which the requirement applies.
NOTE 3: Void
NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.

10.1.4B Inter-frequency RSRP accuracy requirements for FR1 for CA/DC Idle Mode Measurements

10.1.4B.1 Inter-frequency SS-RSRP accuracy requirements

The requirements in this clause are applicable for a UE:

- in state RRC_IDLE or RRC INACTIVE

- that is synchronised to the cell that is measured.

The requirements are for absolute accuracy of SS-RSRP.

10.1.4B.1.1 Absolute Accuracy of SS-RSRP in FR1

The requirements for absolute accuracy of SS-RSRP in this clause apply to a cell on a frequency in FR1 that has different carrier frequency from the serving cell.

The accuracy requirements in Table 10.1.4B.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.

- Conditions for inter-frequency measurements are fulfilled according to Annex B.1.3 for a corresponding Band for each relevant SSB.

Table 10.1.4B.1.1-1: SS-RSRP Inter frequency Absolute accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/Iot Note 2	Io Note 1 range				
			NR operating band groups Note 3	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±6	±10.5	≥-4	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-70
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-70
			NR_TDD_FR1_C	-120	-117	N/A	-70
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-70
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-70
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-70
			NR_FDD_FR1_G	-118	-115	N/A	-70
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-70
±9.5	±12.5	≥-4	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H	N/A	N/A	-70	-50

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: Void
NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2.

10.1.4C Inter-frequency RSRP accuracy requirements for FR1 SAN

10.1.4C.1 Inter-frequency SS-RSRP accuracy requirements

10.1.4C.1.1 Absolute Accuracy of SS-RSRP in FR1

The requirements for absolute accuracy of SS-RSRP in this clause apply to a cell on a frequency in FR1 that has different carrier frequency from the serving cell.

The accuracy requirements in Table 10.1.4C.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant SSB.
- Valid information for the SAN serving the target cell has been provided.

Table 10.1.4C.1.1-1: SS-RSRP Inter frequency Absolute accuracy in FR1

Accuracy	Conditions

Normal condition	Extreme condition	SSB Ês/Iot Note 2	Io Note 1 range				
			NR operating band groups Note 3	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±[4.5]	±[9]	≥-6	NR_FDD_SAB_FR1_A	-121	-118	N/A	-70
±[8]	±[11]	≥-6	NR_FDD_SAB_FR1_A	N/A	N/A	-70	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: Void NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2.							

10.1.4C.1.2 Relative Accuracy of SS-RSRP in FR1

The relative accuracy of SS-RSRP in inter frequency case is defined as the RSRP measured from one cell on a frequency in FR1compared to the RSRP measured from another cell on a different frequency in FR1.

The accuracy requirements in Table 10.1.4C.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] Clause 7.3 for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant SSB.
- $|SSB_RP1_{dBm} - SSB_RP2_{dBm}| \leq 27$ dB
- |Channel 1_Io -Channel 2_Io | ≤ 20 dB
- Valid information for the SAN serving the target cell has been provided.

Table 10.1.4C.1.2-1: SS-RSRP Inter frequency relative accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/Iot Note 2	Io Note 1 range				
			NR operating band groups Note 3	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±[4.5]	±[6]	≥-6	NR_FDD_SAB_FR1_A	-121	-118	N/A	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: The parameter SSB Ês/Iot is the minimum SSB Ês/Iot of the pair of cells to which the requirement applies. NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2.							

10.1.5 Inter-frequency RSRP accuracy requirements for FR2

10.1.5.1 Inter-frequency SS-RSRP accuracy requirements

10.1.5.1.1 Absolute SS-RSRP Accuracy

Unless otherwise specified, the requirements for absolute accuracy of SS-RSRP in this clause apply to a cell on a frequency in FR2 that is on a different frequency than the serving cell.

The accuracy requirements in Table 10.1.5.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant SSB.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.5.1.1-1: SS-RSRP Inter frequency absolute accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	SSB Ês/Iot	Io Note 2 range		
			Minimum Io		Maximum Io
dB	dB	dB	dBm / SCS_{SSB} Note 1		$dBm/BW_{Channel}$
			SCS_{SSB} = 120kHz	SCS_{SSB} = 240kHz	
±6	±9	≥-4	Same value as SSB_RP in Table B.2.3-2, according to UE Power class, operating band and angle of arrival		N/A	-70
±8	±11		N/A		-70	-50
Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival. Note 2: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth. Note 3: In the test cases, the SSB Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.					

10.1.5.1.2 Relative SS-RSRP Accuracy

The relative accuracy of SS-RSRP is defined as the SS-RSRP measured from one cell on a frequency in FR2 compared to the SS-RSRP measured from another cell on another frequency in FR2.

The accuracy requirements in Table 10.1.5.1.2-1 are valid under the following conditions:

- Conditions defined in 38.101-2 [19] Clause 7.3 for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant SSB.
- $|SSB_RP1_{dBm} - SSB_RP2_{dBm}| \leq 27dB$
- $|Channel\ 1_Io - Channel\ 2_Io| \leq 20\ dB$
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.5.1.2-1: SS-RSRP Inter frequency relative accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	SSB Ês/Iot	Io Note 2 range		
			Minimum Io		Maximum Io
dB	dB	dB	dBm / SCS_{SSB} Note 1		$dBm/BW_{Channel}$
			SCS_{SSB} = 120kHz	SCS_{SSB} = 240kHz	
±6	±9	≥-4	Same value as SSB_RP in Table B.2.3-2, according to UE Power class, operating band and angle of arrival		-50
Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.					

Note 2:	Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.
Note 3:	In the test cases, the SSB Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.
Note 4:	The parameter SSB Ês/Iot is the minimum SSB Ês/Iot of the pair of cells to which the requirement applies.

10.1.5.2 Void

10.1.5.3 Inter-frequency CSI-RSRP accuracy requirements

10.1.5.3.1 Absolute CSI-RSRP Accuracy

Unless otherwise specified, the requirements for absolute accuracy of CSI-RSRP in this clause apply to a cell on a frequency in FR2 where the CSI-RS resources to be measured have the different center frequency as the CSI-RS resources indicated for measurement in the serving cell.

The accuracy requirements in Table 10.1.5.3.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant associated SSB.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.9 for a corresponding Band for each relevant CSI-RS to be measured.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3. The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.5.3.1-1.
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.

Note: The reference measurement timing for one layer for inter-frequency measurement is up to UE implementation and shall be based on the timing of one of the target cells.

- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.5.3.1-1: CSI-RSRP Inter frequency absolute accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	CSI-RS Ês/Iot	Io Note 2 range		
			Minimum Io		Maximum Io
dB	dB	dB	dBm / SCS_{CSI-RS} Note 1	dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
			SCS_{CSI-RS} = 60kHz / SCS_{CSI-RS} = 120kHz		
±6	±9	≥-4	Same value as CSI_RP in Table B.2.9-2, according to UE Power class, operating band and angle of arrival	N/A	-70
±8	±11		N/A	-70	-50

Note 1:	Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.
Note 2:	Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.
Note 3:	In the test cases, the CSI-RS Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.

10.1.5.3.2 Relative CSI-RSRP Accuracy

The relative accuracy of CSI-RSRP in inter frequency case is defined as the CSI-RSRP measured from one cell on a frequency in FR2 compared to the CSI-RSRP measured from another cell on another frequency in FR2.

The accuracy requirements in Table 10.1.5.3.2-1 are valid under the following conditions:

- Conditions defined in 38.101-2 [19] Clause 7.3 for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant associated SSB.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.9 for a corresponding Band for each relevant CSI-RS to be measured.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3. The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.5.3.2-1.
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.

Note: The reference measurement timing for one layer for inter-frequency measurement is up to UE implementation and shall be based on the timing of one of the target cells.

- $|CSI_RP1_{dBm} - CSI_RP2_{dBm}| \leq 27dB$
- |Channel 1_Io -Channel 2_Io | ≤ 20 dB
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.5.3.2-1: CSI-RSRP Inter frequency relative accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	CSI-RS Ês/Iot	Io Note 2 range		
			Minimum Io		Maximum Io
dB	dB	dB	dBm / SCS_{CSI-RS} Note 1		$dBm/BW_{Channel}$
			SCS_{CSI-RS} = 60kHz	SCS_{CSI-RS} = 120kHz	
±6	±9	≥-4	Same value as CSI_RP in Table B.2.9-2, according to UE Power class, operating band and angle of arrival		-50

Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.
Note 2: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.
Note 3: In the test cases, the CSI-RS Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.
Note 4: The parameter CSI-RS Ês/Iot is the minimum CSI-RS Ês/Iot of the pair of cells to which the requirement applies.

10.1.5B Inter-frequency RSRP accuracy requirements for FR2 for CA/DC Idle Mode Measurements

10.1.5B.1 Inter-frequency SS-RSRP accuracy requirements

The requirements in this clause are applicable for a UE:

- in state RRC_IDLE or RRC INACTIVE

- that is synchronised to the cell that is measured.

The requirements are for absolute accuracy of SS-RSRP.

10.1.5B.1.1 Absolute SS-RSRP Accuracy

Unless otherwise specified, the requirements for absolute accuracy of SS-RSRP in this clause apply to a cell on a frequency in FR2 that is on a different frequency than the serving cell.

The accuracy requirements in Table 10.1.5B.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.1.3 for a corresponding Band for each relevant SSB.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.5B.1.1-1: SS-RSRP Inter frequency absolute accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	SSB $\hat{E}_s/I_{ot}$	Io Note 2 range		
			Minimum Io		Maximum Io
dB	dB	dB	dBm / SCS_{SSB} Note 1	dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
			SCS_{SSB} = 120kHz / SCS_{SSB} = 240kHz		
±7.5	±10.5	≥-4	Same value as SSB_RP in Table B.2.3-2, according to UE Power class, operating band and angle of arrival	N/A	-70
±9.5	±12.5		N/A	-70	-50

Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.
Note 2: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.
Note 3: In the test cases, the SSB $\hat{E}_s/I_{ot}$ and related parameters may need to be adjusted to ensure $\hat{E}_s/I_{ot}$ at UE baseband is above the value defined in this table.

10.1.6 RSRP Measurement Report Mapping

The reporting range of SS-RSRP and CSI-RSRP for L3 reporting is defined from -156 dBm to -31 dBm with 1 dB resolution. The reporting range of SS-RSRP and CSI-RSRP for L1 reporting is defined from -140 to -44 dBm with 1 dB resolution.

The mapping of measured quantity is defined in Table 10.1.6.1-1. The range in the signalling may be larger than the guaranteed accuracy range.

The reporting range of differential SS-RSRP and CSI-RSRP for L1 reporting and L3 reporting is defined from 0 dB to -30 dB with 2 dB resolution.

The mapping of measured quantity is defined in Table 10.1.6.1-2. The range in the signalling may be larger than the guaranteed accuracy range.

Table 10.1.6.1-1: SS-RSRP and CSI-RSRP measurement report mapping

Reported value	Measured quantity value (L3 SS-RSRP) and CSI-RSRP	Measured quantity value (L1 SS-RSRP and CSI-RSRP)	Unit
RSRP_0	SS-RSRP<-156	Not valid	dBm
RSRP_1	-156≤ SS-RSRP<-155	Not valid	dBm

RSRP_2	-155≤ SS-RSRP<-154	Not valid	dBm
RSRP_3	-154≤ SS-RSRP<-153	Not valid	dBm
RSRP_4	-153≤ SS-RSRP<-152	Not valid	dBm
RSRP_5	-152≤ SS-RSRP<-151	Not valid	dBm
RSRP_6	-151≤ SS-RSRP<-150	Not valid	dBm
RSRP_7	-150≤ SS-RSRP<-149	Not valid	dBm
RSRP_8	-149≤ SS-RSRP<-148	Not valid	dBm
RSRP_9	-148≤ SS-RSRP<-147	Not valid	dBm
RSRP_10	-147≤ SS-RSRP<-146	Not valid	dBm
RSRP_11	-146≤ SS-RSRP<-145	Not valid	dBm
RSRP_12	-145≤ SS-RSRP<-144	Not valid	dBm
RSRP_13	-144≤ SS-RSRP<-143	Not valid	dBm
RSRP_14	-143≤ SS-RSRP<-142	Not valid	dBm
RSRP_15	-142≤ SS-RSRP<-141	Not valid	dBm
RSRP_16	-141≤ SS-RSRP<-140	RSRP<-140	dBm
RSRP_17	-140≤ SS-RSRP<-139	-140≤RSRP<-139	dBm
RSRP_18	-139≤ SS-RSRP<-138	-139≤ RSRP<-138	dBm
…	…		…
RSRP_111	-46≤ SS-RSRP<-45	-46≤ RSRP<-45	dBm
RSRP_112	-45≤ SS-RSRP<-44	-45≤ RSRP<-44	dBm
RSRP_113	-44≤ SS-RSRP<-43	-44≤ RSRP	dBm
RSRP_114	-43≤ SS-RSRP<-42	Not valid	dBm
RSRP_115	-42≤ SS-RSRP<-41	Not valid	dBm
RSRP_116	-41≤ SS-RSRP<-40	Not valid	dBm
RSRP_117	-40≤ SS-RSRP<-39	Not valid	dBm
RSRP_118	-39≤ SS-RSRP<-38	Not valid	dBm
RSRP_119	-38≤ SS-RSRP<-37	Not valid	dBm
RSRP_120	-37≤ SS-RSRP<-36	Not valid	dBm
RSRP_121	-36≤ SS-RSRP<-35	Not valid	dBm
RSRP_122	-35≤ SS-RSRP<-34	Not valid	dBm
RSRP_123	-34≤ SS-RSRP<-33	Not valid	dBm
RSRP_124	-33≤ SS-RSRP<-32	Not valid	dBm
RSRP_125	-32≤ SS-RSRP<-31	Not valid	dBm
RSRP_126	-31≤ SS-RSRP	Not valid	dBm
RSRP_127 (Note)	Infinity	Infinity	dBm

Note: The value of RSRP_127 is applicable for RSRP threshold configured by the network as defined in TS 38.331 [2], but not for the purpose of measurement reporting.

Table 10.1.6.1-2: Differential SS-RSRP and CSI-RSRP measurement (for L1 reporting and L3 reporting) report mapping

Reported value	Measured quantity value (difference in measured RSRP from strongest RSRP)	Unit
DIFFRSRP_0	0≥ΔRSRP>-2	dB
DIFFRSRP_1	-2≥ΔRSRP>-4	dB
DIFFRSRP_2	-4≥ΔRSRP>-6	dB

DIFFRSRP_3	-6≥ΔRSRP>-8	dB
DIFFRSRP_4	-8≥ΔRSRP>-10	dB
DIFFRSRP_5	-10≥ΔRSRP>-12	dB
DIFFRSRP_6	-12≥ΔRSRP>-14	dB
DIFFRSRP_7	-14≥ΔRSRP>-16	dB
DIFFRSRP_8	-16≥ΔRSRP>-18	dB
DIFFRSRP_9	-18≥ΔRSRP>-20	dB
DIFFRSRP_10	-20≥ΔRSRP>-22	dB
DIFFRSRP_11	-22≥ΔRSRP>-24	dB
DIFFRSRP_12	-24≥ΔRSRP>-26	dB
DIFFRSRP_13	-26≥ΔRSRP>-28	dB
DIFFRSRP_14	-28≥ΔRSRP>-30	dB
DIFFRSRP_15	-30≥ΔRSRP	dB

10.1.7 Intra-frequency RSRQ accuracy requirements for FR1

10.1.7.1 Intra-frequency SS-RSRQ accuracy requirements in FR1

10.1.7.1.1 Absolute SS-RSRQ Accuracy in FR1

Unless otherwise specified, the requirements for absolute accuracy of SS-RSRQ in this clause apply to a cell on the same frequency as that of the serving cell in FR1. The accuracy requirements in this clause are also applicable when *highSpeedMeasFlag-r16* or *highSpeedMeasCA-Scell-r17* is configured.

The accuracy requirements in Table 10.1.7.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band for each relevant SSB.

Table 10.1.7.1.1-1: SS-RSRQ Intra frequency absolute accuracy in FR1

Accuracy		**Conditions**					
Normal condition	**Extreme condition**	**SSB Ês/Iot**	**Io [Note 1] range**				
			NR operating band groups [Note 3]	**Minimum Io**			**Maximum Io**
dB	**dB**	**dB**		**dBm / SCS_{SSB}**		**dBm/$BW_{Channel}$**	**dBm/$BW_{Channel}$**
				SCS_{SSB} = 15 kHz	**SCS_{SSB} = 30 kHz**		
±2.5	±4	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
±3.5	±4	≥-6	Note 2	Note 2	Note 2	Note 2	Note 2
NOTE 1: Io is assumed to have constant EPRE across the bandwidth.							

NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2.

10.1.7.2 Intra-frequency CSI-RSRQ accuracy requirements

10.1.7.2.1 Absolute CSI-RSRQ Accuracy

Unless otherwise specified, the requirements for absolute accuracy of CSI-RSRQ in this clause apply to the intra-frequency measurement defined in 9.10.2.1 in FR1.

The accuracy requirements in Table 10.1.7.2.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band for associated SSB.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.8 for a corresponding Band for each relevant CSI-RS.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
  - The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.7.2.1-1.
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.

Note: The reference measurement timing for one layer for intra-frequency measurement is serving cell timing.

Table 10.1.7.2.1-1: CSI-RSRQ Intra frequency absolute accuracy in FR1

Accuracy		Conditions						
Normal condition	Extreme condition	CSI-RS $\hat{E}s/Iot$	Io [Note 1] range					
			NR operating band groups [Note 3]	Minimum Io				Maximum Io
dB	dB	dB		dBm / SCS_{CSI-RS}			$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{CSI-RS} = 15 kHz	SCS_{CSI-RS} = 30 kHz	SCS_{CSI-RS} = 60 kHz		
±2.5	±4	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	-114	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	-112	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-50
±3.5	±4	≥-6	Note 2	Note 2	Note 2	Note 2	Note 2	Note 2

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2.

10.1.7B Intra-frequency RSRQ accuracy requirements for FR1 for CA/DC Idle Mode Measurements

10.1.7B.1 Intra-frequency SS-RSRQ accuracy requirements in FR1

The requirements in this clause are applicable for a UE:

- in state RRC_IDLE or RRC INACTIVE
- that is synchronised to the cell that is measured.

The requirements are for absolute accuracy of SS-RSRQ.

10.1.7B.1.1 Absolute SS-RSRQ Accuracy in FR1

Unless otherwise specified, the requirements for absolute accuracy of SS-RSRQ in this clause apply to the serving cell in FR1.

The accuracy requirements in Table 10.1.7B.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.1.2 for a corresponding Band for each relevant SSB.

Table 10.1.7B.1.1-1: SS-RSRQ Intra frequency absolute accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB $\hat{E}_s/I_{ot}$	Io [Note 1] range				
			NR operating band groups [Note 3]	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±4	±5.5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
±5	±5.5	≥-4	Note 2	Note 2	Note 2	Note 2	Note 2

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2.

10.1.7C Intra-frequency RSRQ accuracy requirements for FR1 SAN

10.1.7C.1 Intra-frequency SS-RSRQ accuracy requirements in FR1

10.1.7C.1.1 Absolute SS-RSRQ Accuracy in FR1

Unless otherwise specified, the requirements for absolute accuracy of SS-RSRQ in this clause apply to a cell on the same frequency as that of the serving cell in FR1.

The accuracy requirements in Table 10.1.7C.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band for each relevant SSB.
- Valid information for the SAN serving the target cell has been provided.

Table 10.1.7C.1.1-1: SS-RSRQ Intra frequency absolute accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB $\hat{E}_s/I_{ot}$	Io [Note 1] range				
			NR operating band groups [Note 3]	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±[2.5]	±[4]	≥-3	NR_FDD_SAB_FR1_A	-121	-118	N/A	-50
±[3.5]	±[4]	≥-6	Note 2	Note 2	Note 2	Note 2	Note 2

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2.

10.1.8 Intra-frequency RSRQ accuracy requirements for FR2

10.1.8.1 Intra-frequency SS-RSRQ accuracy requirements in FR2

10.1.8.1.1 Absolute SS-RSRQ Accuracy in FR2

Unless otherwise specified, the requirements for absolute accuracy of SS-RSRQ in this clause apply to a cell on the same frequency as that of the serving cell in FR2.

The accuracy requirements in Table 10.1.8.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band for each relevant SSB.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.8.1.1-1: SS-RSRQ Intra frequency absolute accuracy in FR2

Accuracy		Conditions		
Normal condition	Extreme condition	SSB $\hat{E}_s/I_{ot}$	Io [Note 2] range	
			Minimum Io	Maximum Io
dB	dB	dB	dBm / SCS_{SSB} [Note 1]	dBm/$BW_{Channel}$

			SCS_{SSB} = 120kHz	SCS_{SSB} = 240kHz	
±2.5	±4	≥-3	Same value as SSB_RP in Table B.2.2-2, according to UE Power class, operating band and angle of arrival		-50
±3.5	±4	≥-6			
Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival. Note 2: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth. Note 3: In the test cases, the SSB Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.					

10.1.8.2 Intra-frequency CSI-RSRQ accuracy requirements

10.1.8.2.1 Absolute CSI-RSRQ Accuracy

Unless otherwise specified, the requirements for absolute accuracy of CSI-RSRQ in this clause apply to the intra-frequency measurement defined in 9.10.2.1 in FR2.

The accuracy requirements in Table 10.1.8.2.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band for each relevant SSB.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.8 for a corresponding Band for each relevant CSI-RS.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
  - The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.8.2.1-1.
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.

Note: The reference measurement timing for one layer for intra-frequency measurement is serving cell timing.

- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.8.2.1-1: CSI-RSRQ Intra frequency absolute accuracy in FR2

Accuracy		Conditions		
Normal condition	Extreme condition	CSI-RS Ês/Iot	Io Note 2 range	
			Minimum Io	Maximum Io
dB	dB	dB	dBm / SCS_{CSI-RS} Note 1	$dBm/BW_{Channel}$
			SCS_{CSI-RS} = 60kHz / SCS_{CSI-RS} = 120kHz	
±2.5	±4	≥-3	Same value as CSI_RP in Table B.2.8-2, according to UE Power class, operating band and angle of arrival	-50
±3.5	±4	≥-6		
Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival. Note 2: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth. Note 3: In the test cases, the CSI-RS Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.				

10.1.8B Intra-frequency RSRQ accuracy requirements for FR2 for CA/DC Idle Mode Measurements

10.1.8B.1 Intra-frequency SS-RSRQ accuracy requirements in FR2

The requirements in this clause are applicable for a UE:

- in state RRC_IDLE or RRC INACTIVE
- that is synchronised to the cell that is measured.

The requirements are for absolute accuracy of SS-RSRQ.

10.1.8B.1.1 Absolute SS-RSRQ Accuracy in FR2

Unless otherwise specified, the requirements for absolute accuracy of SS-RSRQ in this clause apply to the serving cell in FR2.

The accuracy requirements in Table 10.1.8B.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.1.2 for a corresponding Band for each relevant SSB.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.8B.1.1-1: SS-RSRQ Intra frequency absolute accuracy in FR2

Accuracy		Conditions		
Normal condition	Extreme condition	SSB Ês/Iot	Io Note 2 range	
			Minimum Io	Maximum Io
dB	dB	dB	dBm / SCS_{SSB} Note 1	$dBm/BW_{Channel}$
			SCS_{SSB} = 120kHz / SCS_{SSB} = 240kHz	
±4	±5.5	≥-3	Same value as SSB_RP in Table B.2.2-2, according to UE Power class, operating band and angle of arrival	-50
±5	±5.5	≥-4		

Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.
Note 2: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.
Note 3: In the test cases, the SSB Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.

10.1.9 Inter-frequency RSRQ accuracy requirements for FR1

10.1.9.1 Inter-frequency SS-RSRQ accuracy requirements in FR1

10.1.9.1.1 Absolute Accuracy of SS-RSRQ in FR1

The requirements for absolute accuracy of SS-RSRQ in this clause apply to a cell on a frequency in FR1 that has different carrier frequency from the serving cell. The accuracy requirements in this clause are also applicable when *highSpeedMeasInterFreq-r17* is configured.

The accuracy requirements in Table 10.1.9.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant SSB.

Table 10.1.9.1.1-1: SS-RSRQ Inter frequency absolute accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/Iot	Io [Note 1] range				
			NR operating band groups [Note 3]	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±2.5	±4	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
±3.5	±4	≥-6	Note 2	Note 2	Note 2	Note 2	Note 2

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2.

10.1.9.1.2 Relative Accuracy of SS-RSRQ in FR1

The relative accuracy of SS-RSRQ in inter frequency case is defined as the RSRQ measured from one cell on a frequency in FR1 compared to the RSRP measured from another cell on a different frequency in FR1. The accuracy requirements in this clause are also applicable when *highSpeedMeasInterFreq-r17* is configured.

The accuracy requirements in Table 10.1.9.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant SSB.
- $|SSB_RP1_{dBm} - SSB_RP2_{dBm}| \leq 27$ dB
- |Channel 1_Io -Channel 2_Io | ≤ 20 dB

Table 10.1.9.1.2-1: SS-RSRQ Inter frequency relative accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/Iot [Note 2]	Io [Note 1] range				
			NR operating band groups [Note 4]	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
			NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50

±3	±4	≥-3	NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
±4	±4	≥-6	Note 3	Note 3	Note 3	Note 3	Note 3

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The parameter SSB Ês/Iot is the minimum SSB Ês/Iot of the pair of cells to which the requirement applies.
NOTE 3: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.

10.1.9.2 Inter-frequency CSI-RSRQ accuracy requirements

10.1.9.2.1 Absolute CSI-RSRQ Accuracy

Unless otherwise specified, the requirements for absolute accuracy of CSI-RSRQ in this clause apply to the inter-frequency measurement defined in 9.10.3.1 in FR1.

The accuracy requirements in Table 10.1.9.2.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for associated SSB.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.9 for a corresponding Band for each relevant CSI-RS.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
  - The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.9.2.1-1.
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.

Note: The reference measurement timing for one layer for inter-frequency measurement is up to UE implementation and shall be based on the timing of one of the target cells.

Table 10.1.9.2.1-1: CSI-RSRQ Inter frequency absolute accuracy in FR1

Accuracy		**Conditions**					
Normal condition	**Extreme condition**	**CSI-RS Ês/Iot**	**Io [Note 1] range**				
			NR operating band groups [Note 3]	**Minimum Io**			**Maximum Io**
dB	**dB**	**dB**		**dBm / SCS_{CSI-RS}**			**dBm/$BW_{Channel}$**	**dBm/$BW_{Channel}$**
				SCS_{CSI-RS} = 15 kHz	**SCS_{CSI-RS} = 30 kHz**	**SCS_{CSI-RS} = 60 kHz**		
±2.5	±4	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	-114	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-50

			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	-112	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-50
±3.5	±4	≥-6	Note 2	Note 2	Note 2	Note 2	Note 2	Note 2
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement. NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2.								

10.1.9.2.2 Relative CSI-RSRQ Accuracy

The relative accuracy of CSI-RSRQ is defined as the CSI-RSRQ measured from one cell compared to the CSI-RSRQ measured from another cell with the same center frequency, or between any two CSI-RSRQ levels measured on the same cell in FR1.

The accuracy requirements in Table 10.1.9.2.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for the associated SSB.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.9 for a corresponding Band for each relevant CSI-RS.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
  - The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.9.2.2-1.
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.

Note: The reference measurement timing for one layer for inter-frequency measurement is up to UE implementation and shall be based on the timing of one of the target cells.

Table 10.1.9.2.2-1: CSI-RSRQ Inter frequency relative accuracy in FR1

Accuracy		**Conditions**						
Normal condition	**Extreme condition**	**CSI-RS $\hat{E}_s/I_{ot}$** Note 2	**Io** Note 1 **range**					
			NR operating band groups Note 4	**Minimum Io**				**Maximum Io**
dB	**dB**	**dB**		**dBm / SCS_{CSI-RS}**			**$dBm/BW_{Channel}$**	**$dBm/BW_{Channel}$**
				SCS_{CSI-RS} = 15 kHz	**SCS_{CSI-RS} = 30 kHz**	**SCS_{CSI-RS} = 60 kHz**		
±3	±4	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	-114	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	-112	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-50
±4	±4	≥-6	Note 3	Note 3	Note 3	Note 3	Note 3	Note 3
NOTE 1: Io is assumed to have constant EPRE across the bandwidth.								

NOTE 2: The parameter CSI-RS Ês/Iot is the minimum CSI-RS Ês/Iot of the pair of cells to which the requirement applies.
NOTE 3: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.

10.1.9B Inter-frequency RSRQ accuracy requirements for FR1 for CA/DC Idle Mode Measurements

10.1.9B.1 Inter-frequency SS-RSRQ accuracy requirements in FR1

The requirements in this clause are applicable for a UE:

- in state RRC_IDLE or RRC INACTIVE
- that is synchronised to the cell that is measured.

The requirements are for absolute accuracy of SS-RSRQ.

10.1.9B.1.1 Absolute Accuracy of SS-RSRQ in FR1

The requirements for absolute accuracy of SS-RSRQ in this clause apply to a cell on a frequency in FR1 that has different carrier frequency from the serving cell.

The accuracy requirements in Table 10.1.9B.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.1.3 for a corresponding Band for each relevant SSB.

Table 10.1.9B.1.1-1: SS-RSRQ Inter frequency absolute accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/Iot	Io [Note 1] range				
			NR operating band groups [Note 3]	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±4	±5.5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
±5	±5.5	≥-4	Note 2	Note 2	Note 2	Note 2	Note 2

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2.

10.1.9C Inter-frequency RSRQ accuracy requirements for FR1 SAN

10.1.9C.1 Inter-frequency SS-RSRQ accuracy requirements in FR1

10.1.9C.1.1 Absolute Accuracy of SS-RSRQ in FR1

The requirements for absolute accuracy of SS-RSRQ in this clause apply to a cell on a frequency in FR1 that has different carrier frequency from the serving cell.

The accuracy requirements in Table 10.1.9C.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant SSB.
- Valid information for the SAN serving the target cell has been provided.

Table 10.1.9C.1.1-1: SS-RSRQ Inter frequency absolute accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB $\hat{E}_s/I_{ot}$	Io [Note 1] range				
			NR operating band groups [Note 3]	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±[2.5]	±[4]	≥-3	NR_FDD_SAB_FR1_A	-121	-118	N/A	-50
±[3.5]	±[4]	≥-6	Note 2	Note 2	Note 2	Note 2	Note 2

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2.

10.1.9C.1.2 Relative Accuracy of SS-RSRQ in FR1

The relative accuracy of SS-RSRQ in inter frequency case is defined as the RSRQ measured from one cell on a frequency in FR1 compared to the RSRP measured from another cell on a different frequency in FR1.

The accuracy requirements in Table 10.1.9C.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant SSB.
- $|SSB_RP1_{dBm} - SSB_RP2_{dBm}| \leq 27$ dB
- $|Channel\ 1_Io - Channel\ 2_Io| \leq 20$ dB
- Valid information for the SAN serving the target cell has been provided.

Table 10.1.9C.1.2-1: SS-RSRQ Inter frequency relative accuracy in FR1

Accuracy		Conditions				
Normal condition	Extreme condition	SSB $\hat{E}_s/I_{ot}$ [Note 2]	Io [Note 1] range			
			NR operating band groups [Note 4]	Minimum Io		Maximum Io
dB	dB	dB		dBm / SCS_{SSB}	$dBm/BW_{Channel}$	$dBm/BW_{Channel}$

				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±[3]	±[4]	≥-3	NR_FDD_SAB_FR1_A	-121	-118	N/A	-50
±[4]	±[4]	≥-6	Note 3	Note 3	Note 3	Note 3	Note 3
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: The parameter SSB Ês/Iot is the minimum SSB Ês/Iot of the pair of cells to which the requirement applies. NOTE 3: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement. NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.							

10.1.10 Inter-frequency RSRQ accuracy requirements for FR2

10.1.10.1 Inter-frequency SS-RSRQ accuracy requirements in FR2

10.1.10.1.1 Absolute Accuracy of SS-RSRQ in FR2

The requirements for absolute accuracy of SS-RSRQ in this clause apply to a cell on a frequency in FR2 that has different carrier frequency from the serving cell.

The accuracy requirements in Table 10.1.10.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant SSB.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.10.1.1-1: SS-RSRQ Inter frequency absolute accuracy in FR2

Accuracy		**Conditions**		
Normal condition	**Extreme condition**	**SSB Ês/Iot**	**Io [Note 2] range**	
			Minimum Io	**Maximum Io**
dB	**dB**	**dB**	**dBm / SCS_{SSB} [Note 1]**	**dBm/$BW_{Channel}$**
			SCS_{SSB} = 120kHz / **SCS_{SSB} = 240kHz**	
±2.5	±4	≥-3	Same value as SSB_RP in Table B.2.2-2, according to UE Power class, operating band and angle of arrival	-50
±3.5	±4	≥-4		
Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival. Note 2: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth. Note 3: In the test cases, the SSB Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.				

10.1.10.1.2 Relative Accuracy of SS-RSRQ in FR2

The relative accuracy of SS-RSRQ in inter frequency case is defined as the RSRQ measured from one cell on a frequency in FR2 compared to the RSRP measured from another cell on a different frequency in FR2.

The accuracy requirements in Table 10.1.10.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant SSB.

- $|SSB_RP1_{dBm} - SSB_RP2_{dBm}| \leq 27$ dB
- | Channel 1_Io -Channel 2_Io | ≤ 20 dB
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.10.1.2-1: SS-RSRQ Inter frequency relative accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	SSB Ês/Iot	Io Note 2 range		
			Minimum Io		Maximum Io
dB	dB	dB	dBm / SCS_{SSB} Note 1		$dBm/BW_{Channel}$
			SCS_{SSB} = 120kHz	SCS_{SSB} = 240kHz	
±3	±4	≥-3	Same value as SSB_RP in Table B.2.2-2, according to UE Power class, operating band and angle of arrival		-50
±4	±4	≥-4			

Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.
Note 2: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.
Note 3: The parameter SSB Ês/Iot is the minimum SSB Ês/Iot of the pair of cells to which the requirement applies.
Note 4: In the test cases, the SSB Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.

10.1.10.2 Inter-frequency CSI-RSRQ accuracy requirements

10.1.10.2.1 Absolute CSI-RSRQ Accuracy

Unless otherwise specified, the requirements for absolute accuracy of CSI-RSRQ in this clause apply the inter-frequency measurement defined in 9.10.3.1 in FR2.

The accuracy requirements in Table 10.1.10.2.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for associated SSB.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.9 for a corresponding Band for each relevant CSI-RS.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
  - The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.10.2.1-1.
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.

Note: The reference measurement timing for one layer for inter-frequency measurement is up to UE implementation and shall be based on the timing of one of the target cells.

Table 10.1.10.2.1-1: CSI-RSRQ Inter frequency absolute accuracy in FR2

Accuracy		Conditions		
Normal condition	Extreme condition	CSI-RS Ês/Iot	Io Note 2 range	
			Minimum Io	Maximum Io

dB	dB	dB	dBm / SCS_{CSI-RS} Note 1		dBm/$BW_{Channel}$
			SCS_{CSI-RS} = 60kHz	SCS_{CSI-RS} = 120kHz	
±2.5	±4	≥-3	Same value as CSI_RP in Table B.2.9-2, according to UE Power class, operating band and angle of arrival		-50
±3.5	±4	≥-4			
Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival. Note 2: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth. Note 3: In the test cases, the CSI-RS Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.					

10.1.10.2.2 Relative CSI-RSRQ Accuracy

The relative accuracy of CSI-RSRQ is defined as the CSI-RSRQ measured from one cell compared to the CSI-RSRQ measured from another cell with the same center frequency, or between any two CSI-RSRQ levels measured on the same cell in FR2.

The accuracy requirements in Table 10.1.10.2.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for the associated SSB.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.9 for a corresponding Band for each relevant CSI-RS.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
  - The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.10.2.2-1.
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.

Note: The reference measurement timing for one layer for inter-frequency measurement is up to UE implementation and shall be based on the timing of one of the target cells.

Table 10.1.10.2.2-1: CSI-RSRQ Inter frequency relative accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	CSI-RS Ês/Iot	Io Note 2 range		
			Minimum Io		Maximum Io
dB	dB	dB	dBm / SCS_{CSI-RS} Note 1		dBm/$BW_{Channel}$
			SCS_{CSI-RS} = 60kHz	SCS_{CSI-RS} = 120kHz	
±3	±4	≥-3	Same value as CSI_RP in Table B.2.9-2, according to UE Power class, operating band and angle of arrival		-50
±4	±4	≥-4			
Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival. Note 2: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth. Note 3: The parameter CSI-RS Ês/Iot is the minimum CSI-RS Ês/Iot of the pair of cells to which the requirement applies. Note 4: In the test cases, the CSI-RS Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.					

10.1.10B Inter-frequency RSRQ accuracy requirements for FR2 for CA/DC Idle Mode Measurements

10.1.10B.1 Inter-frequency SS-RSRQ accuracy requirements in FR2

The requirements in this clause are applicable for a UE:

- in state RRC_IDLE or RRC INACTIVE
- that is synchronised to the cell that is measured.

The requirements are for absolute accuracy of SS-RSRQ.

10.1.10B.1.1 Absolute Accuracy of SS-RSRQ in FR2

The requirements for absolute accuracy of SS-RSRQ in this clause apply to a cell on a frequency in FR2 that has different carrier frequency from the serving cell.

The accuracy requirements in Table 10.1.10B.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.1.3 for a corresponding Band for each relevant SSB.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.10B.1.1-1: SS-RSRQ Inter frequency absolute accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	SSB Ês/Iot	Io Note 2 range		
			Minimum Io		Maximum Io
dB	dB	dB	dBm / SCS_{SSB} Note 1		$dBm/BW_{Channel}$
			SCS_{SSB} = 120kHz	SCS_{SSB} = 240kHz	
±4	±5.5	≥-3	Same value as SSB_RP in Table B.2.2-2, according to UE Power class, operating band and angle of arrival		-50
±5	±5.5	≥-4			

Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.
Note 2: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.
Note 3: In the test cases, the SSB Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.

10.1.11 RSRQ report mapping

10.1.11.1 SS-RSRQ and CSI-RSRQ measurement report mapping

The reporting range of SS-RSRQ and CSI-RSRQ measurement is defined from -43 dB to 20 dB with 0.5 dB resolution. The mapping of measured quantity is defined in Table 10.1.11.1-1. The range in the signalling may be larger than the guaranteed accuracy range.

Table 10.1.11.1-1: SS-RSRQ and CSI-RSRQ measurement report mapping

Reported value	Measured quantity value	Unit

SS-RSRQ_0	SS-RSRQ<-43	dB
SS-RSRQ_1	-43≤ SS-RSRQ<-42.5	dB
SS-RSRQ_2	-42.5≤ SS-RSRQ<-42	dB
SS-RSRQ_3	-42≤ SS-RSRQ<-41.5	dB
SS-RSRQ_4	-41.5≤ SS-RSRQ<-41	dB
..	..	…
SS-RSRQ_122	17.5≤ SS-RSRQ<18	dB
SS-RSRQ_123	18≤ SS-RSRQ<18.5	dB
SS-RSRQ_124	18.5≤ SS-RSRQ<19	dB
SS-RSRQ_125	19≤ SS-RSRQ<19.5	dB
SS-RSRQ_126	19.5≤ SS-RSRQ<20	dB
SS-RSRQ_127	20 ≤ SS-RSRQ	dB

10.1.12 Intra-frequency SINR accuracy requirements for FR1

10.1.12.1 Intra-frequency SS-SINR accuracy requirements in FR1

10.1.12.1.1 Absolute SS-SINR Accuracy in FR1

Unless otherwise specified, the requirements for absolute accuracy of SS-SINR in this clause apply to a cell on the same frequency as that of the serving cell in FR1.

The accuracy requirements in Table 10.1.12.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band.

Table 10.1.12.1.1-1: SS-SINR Intra frequency absolute accuracy in FR1

Accuracy		**Conditions**					
Normal condition	**Extreme condition**	**SSB Ês/Iot** Note 3	**Io** Note 1 **range**				
			NR operating band groups Note 4	**Minimum Io**			**Maximum Io**
dB	**dB**	**dB**		**dBm / SCS_{SSB}**		**dBm/$BW_{Channel}$**	**dBm/$BW_{Channel}$**
				SCS_{SSB} = 15 kHz	**SCS_{SSB} = 30 kHz**		
±3.0	±4	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
±3.5	±4	≥-6	Note 2	Note 2	Note 2	Note 2	Note 2

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 3: The requirements apply for SSB Ês/Iot ≤ 25 dB under non-HST scenarios.
NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.
NOTE 5: The requirements apply for SSB Ês/Iot ≤5 dB with SCS 15kHz or 30kHz under NR high speed scenarios.

10.1.12.2 Intra-frequency CSI-SINR accuracy requirements in FR1

10.1.12.2.1 Absolute CSI-SINR Accuracy in FR1

Unless otherwise specified, the requirements for absolute accuracy of CSI-SINR in this clause apply to a cell on the same frequency as that of the serving cell in FR1.

The accuracy requirements in Table 10.1.12.2.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.8 for a corresponding Band.
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.
  - Note: The reference measurement timing for intra-frequency measurement is serving cell timing.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
  - The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.12.2.1-1.

Table 10.1.12.2.1-1: CSI-SINR Intra frequency absolute accuracy in FR1

Accuracy		Conditions						
			Io [Note 1] range					
Normal condition	Extreme condition	CSI-RS Ês/Iot	NR operating band groups	Minimum Io				Maximum Io
				dBm / SCS			dBm/BW Channel	dBm/BW Channel
				SCS (kHz)				
dB	dB	dB		15	30	60		
±3	±4	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-70
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-70
			NR_TDD_FR1_C	-120	-117	-114	N/A	-70
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-70
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-70
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-70
			NR_FDD_FR1_G	-118	-115	-112	N/A	-70
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-70
±3.5	±4	≥-6	Note 2	Note 2	Note 2	Note 2	N/A	Note 2

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2.
NOTE 4: The requirements apply for CSI-RS Ês/Iot ≤XdB. X=15 if timing offset between the reference measurement timing and the target CSI-RS is no larger than 0.5*CP, and X=4 if timing offset between the reference measurement timing and the target CSI-RS is larger than 0.5*CP but no larger than CP.

10.1.12C Intra-frequency SINR accuracy requirements for FR1 SAN

10.1.12C.1 Intra-frequency SS-SINR accuracy requirements in FR1

10.1.12C.1.1 Absolute SS-SINR Accuracy in FR1

Unless otherwise specified, the requirements for absolute accuracy of SS-SINR in this clause apply to a cell on the same frequency as that of the serving cell in FR1.

The accuracy requirements in Table 10.1.12C.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band.
- Valid information for the SAN serving the target cell has been provided.

Table 10.1.12C.1.1-1: SS-SINR Intra frequency absolute accuracy in FR1

Accuracy		Conditions				
Normal condition	Extreme condition	SSB $\hat{E}s/Iot$ Note 3	Io Note 1 range			
			NR operating band groups Note 4	Minimum Io		Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±[3]	±[4]	≥-3	NR_FDD_SAB_FR1_A	-121	-118	N/A	-50
±[3.5]	±[4]	≥-6	Note 2	Note 2	Note 2	Note 2	Note 2

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 3: The requirements apply for SSB $\hat{E}s/Iot \leq 25$ dB under non-HST scenarios.
NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.
NOTE 5: The requirements apply for SSB $\hat{E}s/Iot \leq 5$ dB with SCS 15kHz or 30kHz under NR high speed scenarios.

10.1.13 Intra-frequency SINR accuracy requirements for FR2

10.1.13.1 Intra-frequency SS-SINR accuracy requirements in FR2

10.1.13.1.1 Absolute SS-SINR Accuracy in FR2

Unless otherwise specified, the requirements for absolute accuracy of SS-SINR in this clause apply to a cell on the same frequency as that of the serving cell in FR2.

The accuracy requirements in Table 10.1.13.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.13.1.1-1: SS-SINR Intra frequency absolute accuracy in FR2

Accuracy		Conditions		
Normal condition	Extreme condition	SSB $\hat{E}s/Iot$	Io Note 2 range	
			Minimum Io	Maximum Io
dB	dB	dB	dBm / SCS_{SSB} Note 1	$dBm/BW_{Channel}$

			SCS_{SSB} = 120kHz	SCS_{SSB} = 240kHz	
±3	±4	≥-3	Same value as SSB_RP in Table B.2.2-2, according to UE Power class, operating band and angle of arrival		-50
±3.5	±4	≥-6			

Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.
Note 2: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.
Note 3: In the test cases, the SSB Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.
Note 4: The requirements apply for SSB Ês/Iot ≤ 25 dB.

10.1.13.2 Intra-frequency CSI-SINR accuracy requirements in FR2

10.1.13.2.1 Absolute CSI-SINR Accuracy in FR2

Unless otherwise specified, the requirements for absolute accuracy of CSI-SINR in this clause apply to a cell on the same frequency as that of the serving cell in FR2.

The accuracy requirements in Table 10.1.13.2.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.8 for a corresponding Band.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.
  - Note: The reference measurement timing for intra-frequency measurement is serving cell timing.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
  - The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.13.2.1-1.

Table 10.1.13.2.1-1: CSI-SINR Intra frequency absolute accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	CSI-RS Ês/Iot	Io Note 2 range		
			Minimum Io		Maximum Io
dB	dB	dB	dBm / SCS_{CSI-RS} Note 1		$dBm/BW_{Channel}$
			SCS_{CSI-RS} = 60kHz	SCS_{CSI-RS} = 120kHz	
±3	±4	≥-3	Same value as CSI_RP in Table B.2.8-2, according to UE Power class, operating band and angle of arrival		-50
±3.5	±4	≥-6			

Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.
Note 2: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.
Note 3: In the test cases, the CSI-RS Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.
Note 4: The requirements apply for CSI-RS Ês/Iot ≤XdB. X=15 if timing offset between the reference measurement timing and the target CSI-RS is no larger than 0.5*CP, and X=4 if timing offset between the reference measurement timing and the target CSI-RS is larger than 0.5*CP but no larger than CP.

10.1.14 Inter-frequency SINR accuracy requirements for FR1

10.1.14.1 Inter-frequency SS-SINR accuracy requirements in FR1

10.1.14.1.1 Aboslute Accuracy of SS-SINR in FR1

The requirements for absolute accuracy of SS-SINR in this clause apply to a cell on a frequency in FR1 that has different carrier frequency from the serving cell.

The accuracy requirements in Table 10.1.14.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band.

Table 10.1.14.1.1-1: SS-SINR Inter frequency absolute accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/Iot Note 3	Io Note 1 range				
			NR operating band groups Note 4	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±3.0	±4	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
±3.5	±4	≥-6	Note 2	Note 2	Note 2	Note 2	Note 2

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 3: The requirements apply for SSB Ês/Iot ≤ 25 dB.
NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.
NOTE 5: The requirements apply for SSB Ês/Iot ≤ [5] dB with SCS 15kHz or 30kHz under NR high speed scenarios.

10.1.14.1.2 Relative Accuracy of SS-SINR in FR1

The relative accuracy of SS-SINR in inter frequency case is defined as the SS-SINR measured from one cell on a frequency in FR1 compared to the SS-SINR measured from another cell on a different frequency in FR1.

The accuracy requirements in Table 10.1.14.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band.
- $|SSB_RP1_{dBm} - SSB_RP2_{dBm}| \leq 27$ dB
- $|$ Channel 1_Io -Channel 2_Io $| \leq 20$ dB

Table 10.1.14.1.2-1: SS-SINR Inter frequency relative accuracy in FR1

Accuracy	Conditions

Normal condition	Extreme condition	SSB Ês/Iot Note 2,4	Io Note 1 range				
			NR operating band groups Note 5	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{SSB} = 120 kHz	SCS_{SSB} = 240 kHz		
±3.5	±4	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
±4	±4	≥-6	Note 3	Note 3	Note 3	Note 3	Note 3

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The parameter SSB Ês/Iot is the minimum SSB Ês/Iot of the pair of cells to which the requirement applies.
NOTE 3: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 4: The requirements apply for SSB Ês/Iot ≤ [25] dB.
NOTE 5: NR operating band groups in FR1 are as defined in clause 3.5.2.
NOTE 6: The requirements apply for SSB Ês/Iot ≤ [5] dB with SCS 15kHz or 30kHz under NR high speed scenarios.

10.1.14.2 Inter-frequency CSI-SINR accuracy requirements in FR1

10.1.14.2.1 Aboslute Accuracy of CSI-SINR in FR1

The requirements for absolute accuracy of CSI-SINR in this clause apply to a cell on a frequency in FR1 that has different carrier frequency from the serving cell.

The accuracy requirements in Table 10.1.14.2.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.9 for a corresponding Band.
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.
  - Note: The reference measurement timing for inter-frequency measurement is up to UE implementation and shall be based on the timing of one of the target cells.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
  - The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.14.2.1-1.

Table 10.1.14.2.1-1: CSI-SINR Inter frequency absolute accuracy in FR1

Accuracy		Conditions						
			Io Note 1 range					
Normal condition	Extreme condition	CSI-RS Ês/Iot	NR operating band groups	Minimum Io				Maximum Io
dB	dB	dB		dBm / SCS SCS (kHz)			dBm/BW Channel	dBm/BW Channel
				15	30	60		
±3	±4	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A,	-121	-118	-115	N/A	-70

			NR_SDL_FR1_A					
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-70
			NR_TDD_FR1_C	-120	-117	-114	N/A	-70
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-70
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-70
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-70
			NR_FDD_FR1_G	-118	-115	-112	N/A	-70
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-70
±3.5	±4	≥-6	Note 2	Note 2	Note 2	Note 2	N/A	Note 2
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement. NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2. NOTE 4: The requirements apply for CSI-RS Ês/Iot ≤XdB. X=15 if timing offset between the reference measurement timing and the target CSI-RS is no larger than 0.5*CP, and X=4 if timing offset between the reference measurement timing and the target CSI-RS is larger than 0.5*CP but no larger than CP.								

10.1.14.2.2 Relative Accuracy of CSI-SINR in FR1

The relative accuracy of CSI-SINR in inter frequency case is defined as the CSI-SINR measured from one cell on a frequency in FR1 compared to the CSI-SINR measured from another cell on a different frequency in FR1.

The accuracy requirements in Table 10.1.14.2.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.9 for a corresponding Band.
- $|CSI_RP1_{dBm} - CSI_RP2_{dBm}| \leq 27$ dB
- | Channel 1_Io -Channel 2_Io | ≤ 20 dB
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.
  - Note: The reference measurement timing for inter-frequency measurement is up to UE implementation and shall be based on the timing of one of the target cells.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
  - The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.14.2.2-1.

Table 10.1.14.2.2-1: CSI-SINR Inter frequency relative accuracy in FR1

Accuracy		**Conditions**						
			Io Note 1 range					
Normal condition	**Extreme condition**	**CSI-RS Ês/Iot Note 3**	**NR operating band groups**	**Minimum Io**				**Maximum Io**
dB	**dB**	**dB**		**dBm / SCS**			**dBm/BW**	**dBm/BW**
				SCS (kHz)			**Channel**	**Channel**
				15	**30**	**60**		
±3.5	±4	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-70
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-70
			NR_TDD_FR1_C	-120	-117	-114	N/A	-70
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-70
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-70
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-70

			NR_FDD_FR1_G	-118	-115	-112	N/A	-70
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-70
±4	±4	≥-6	Note 2	Note 2	Note 2	Note 2	N/A	Note 2

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 3: The parameter CSI-RS Ês/Iot is the minimum CSI-RS Ês/Iot of the pair of cells to which the requirement applies.
NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.
NOTE 5: The requirements apply for CSI-RS Ês/Iot ≤ XdB. X=15 if timing offset between the reference measurement timing and the target CSI-RS is no larger than 0.5*CP, and X=4 if timing offset between the reference measurement timing and the target CSI-RS is larger than 0.5*CP but no larger than CP.

10.1.14C Inter-frequency SINR accuracy requirements for FR1 SAN

10.1.14C.1 Inter-frequency SS-SINR accuracy requirements in FR1

10.1.14C.1.1 Aboslute Accuracy of SS-SINR in FR1

The requirements for absolute accuracy of SS-SINR in this clause apply to a cell on a frequency in FR1 that has different carrier frequency from the serving cell.

The accuracy requirements in Table 10.1.14C.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band.
- Valid information for the SAN serving the target cell has been provided.

Table 10.1.14C.1.1-1: SS-SINR Inter frequency absolute accuracy in FR1

Accuracy		**Conditions**					
Normal condition	**Extreme condition**	**SSB Ês/Iot** Note 3	**Io** Note 1 **range**				
			NR operating band groups Note 4	**Minimum Io**			**Maximum Io**
dB	**dB**	**dB**		**dBm / SCS_{SSB}**		**dBm/$BW_{Channel}$**	**dBm/$BW_{Channel}$**
				SCS_{SSB} = 15 kHz	**SCS_{SSB} = 30 kHz**		
±[3]	±[4]	≥-3	NR_FDD_SAB_FR1_A	-121	-118	N/A	-50
±[3.5]	±[4]	≥-6	Note 2	Note 2	Note 2	Note 2	Note 2

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 3: The requirements apply for SSB Ês/Iot ≤ 25 dB.
NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.

10.1.14C.1.2 Relative Accuracy of SS-SINR in FR1

The relative accuracy of SS-SINR in inter frequency case is defined as the SS-SINR measured from one cell on a frequency in FR1 compared to the SS-SINR measured from another cell on a different frequency in FR1.

The accuracy requirements in Table 10.1.14C.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band.
- $|SSB_RP1_{dBm} - SSB_RP2_{dBm}| \leq 27$ dB
- | Channel 1_Io -Channel 2_Io | ≤ 20 dB

- Valid information for the SAN serving the target cell has been provided.

Table 10.1.14C.1.2-1: SS-SINR Inter frequency relative accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/Iot Note 2,4	Io Note 1 range				
			NR operating band groups Note 5	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{SSB} = 120 kHz	SCS_{SSB} = 240 kHz		
±[3.5]	±[4]	≥-3	NR_FDD_SAB_FR1_A	-121	-118	N/A	-50
±[4]	±[4]	≥-6	Note 3	Note 3	Note 3	Note 3	Note 3

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The parameter SSB Ês/Iot is the minimum SSB Ês/Iot of the pair of cells to which the requirement applies.
NOTE 3: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 4: The requirements apply for SSB Ês/Iot ≤ [25] dB.
NOTE 5: NR operating band groups in FR1 are as defined in clause 3.5.2.

10.1.15 Inter-frequency SINR accuracy requirements for FR2

10.1.15.1 Inter-frequency SS-SINR accuracy requirements in FR2

10.1.15.1.1 Aboslute Accuracy of SS-SINR in FR2

The requirements for absolute accuracy of SS-SINR in this clause apply to a cell on a frequency in FR2 that has different carrier frequency from the serving cell.

The accuracy requirements in Table 10.1.15.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.15.1.1-1: SS-SINR Inter frequency absolute accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	SSB Ês/Iot	Io Note 2 range		
			Minimum Io		Maximum Io
dB	dB	dB	dBm / SCS_{SSB} Note 1		$dBm/BW_{Channel}$
			SCS_{SSB} = 120kHz	SCS_{SSB} = 240kHz	
±3	±4	≥-3	Same value as SSB_RP in Table B.2.2-2, according to UE Power class, operating band and angle of arrival		-50
±3.5	±4	≥-4			

Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.
Note 2: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.
Note 3: In the test cases, the SSB Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.
Note 4: The requirements apply for SSB Ês/Iot ≤ 25 dB.

10.1.15.1.2 Relative Accuracy of SS-SINR in FR2

The relative accuracy of SS-SINR in inter frequency case is defined as the SS-SINR measured from one cell on a frequency in FR2 compared to the SS-SINR measured from another cell on a different frequency in FR2.

The accuracy requirements in Table 10.1.15.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band.
- $|SSB_RP1_{dBm} - SSB_RP2_{dBm}| \leq 27$ dB
- $|$ Channel 1_Io -Channel 2_Io $| \leq 20$ dB
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.15.1.2-1: SS-SINR Inter frequency relative accuracy in FR2

Accuracy		Conditions		
Normal condition	Extreme condition	SSB Ês/Iot	Io Note 2 range	
			Minimum Io	Maximum Io
dB	dB	dB	dBm / SCS_{SSB} Note 1	$dBm/BW_{Channel}$
			SCS_{SSB} = 120kHz / SCS_{SSB} = 240kHz	
±3.5	±4	≥-3	Same value as SSB_RP in Table B.2.2-2, according to UE Power class, operating band and angle of arrival	-50
±4	±4	≥-6		

Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.
Note 2: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.
Note 3: The parameter SSB Ês/Iot is the minimum SSB Ês/Iot of the pair of cells to which the requirement applies.
Note 4: In the test cases, the SSB Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.
Note 5: The requirements apply for SSB Ês/Iot ≤ 25 dB.

10.1.15.2 Inter-frequency CSI-SINR accuracy requirements in FR2

10.1.15.2.1 Aboslute Accuracy of CSI-SINR in FR2

The requirements for absolute accuracy of CSI-SINR in this clause apply to a cell on a frequency in FR2 that has different carrier frequency from the serving cell.

The accuracy requirements in Table 10.1.15.2.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.9 for a corresponding Band.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.
    - Note: The reference measurement timing for inter-frequency measurement is up to UE implementation and shall be based on the timing of one of the target cells.

- The bandwidth of CSI-RS is 48 PRBs and the density is 3.

  - The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.15.2.1-1.

Table 10.1.15.2.1-1: CSI-SINR Inter frequency absolute accuracy in FR2

Accuracy		Conditions		
Normal condition	Extreme condition	CSI-RS Ês/Iot	Io Note 2 range	
			Minimum Io	Maximum Io
dB	dB	dB	dBm / SCS_{CSI-RS} Note 1	$dBm/BW_{Channel}$
			SCS_{CSI-RS} = 60kHz / SCS_{CSI-RS} = 120kHz	
±3	±4	≥-3	Same value as CSI_RP in Table B.2.9-2, according to UE Power class, operating band and angle of arrival	-50
3.5	±4	≥-4		

Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.
Note 2: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.
Note 3: In the test cases, the CSI-RS Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.
Note 4: The requirements apply for CSI-RS Ês/Iot ≤XdB. X=15 if timing offset between the reference measurement timing and the target CSI-RS is no larger than 0.5*CP, and X=4 if timing offset between the reference measurement timing and the target CSI-RS is larger than 0.5*CP but no larger than CP.

10.1.15.2.2 Relative Accuracy of CSI-SINR in FR2

The relative accuracy of CSI-SINR in inter frequency case is defined as the CSI-SINR measured from one cell on a frequency in FR2 compared to the CSI-SINR measured from another cell on a different frequency in FR2.

The accuracy requirements in Table 10.1.15.2.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.

- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.y for a corresponding Band.

- $|CSI_RP1_{dBm} - CSI_RP2_{dBm}| \leq 27$ dB

- $|$ Channel 1_Io -Channel 2_Io $| \leq 20$ dB

- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.

  - Note: The reference measurement timing for inter-frequency measurement is up to UE implementation and shall be based on the timing of one of the target cells.

- The bandwidth of CSI-RS is 48 PRBs and the density is 3.

  - The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.15.2.2-1.

Table 10.1.15.2.2-1: CSI-SINR Inter frequency relative accuracy in FR2

Accuracy		Conditions		
Normal condition	Extreme condition	CSI-RS Ês/Iot	Io Note 2 range	
			Minimum Io	Maximum Io
dB	dB	dB	dBm / SCS_{CSI-RS} Note 1	$dBm/BW_{Channel}$

			SCS_{CSI-RS} = 60kHz	**SCS_{CSI-RS} = 120kHz**	
±3.5	±4	≥-3	Same value as CSI_RP in Table B.2.9-2, according to UE Power class, operating band and angle of arrival		-50
±4	±4	≥-6			

Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.
Note 2: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.
Note 3: In the test cases, the CSI-RS Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.
Note 4: The requirements apply for CSI-RS Ês/Iot ≤XdB. X=15 if timing offset between the reference measurement timing and the target CSI-RS is no larger than 0.5*CP, and X=4 if timing offset between the reference measurement timing and the target CSI-RS is larger than 0.5*CP but no larger than CP.

10.1.16 SINR report mapping

10.1.16.1 SS-SINR and CSI-SINR measurement report mapping

The reporting range of SS-SINR and CSI-SINR for L3 reporting and L1 reporing is defined from -23 dB to 40 dB with 0.5 dB resolution. The mapping of measured quantity is defined in Table 10.1.16.1-1. The range in the signalling may be larger than the guaranteed accuracy range.

The reporting range of differential SS-SINR and CSI-SINR for L1 reporting and L3 reporting is defined from -15 dB to 0 dB with 1 dB resolution.

The mapping of measured quantity is defined in Table 10.1.16.1-2. The range in the signalling may be larger than the guaranteed accuracy range.

Table 10.1.16.1-1: SS-SINR and CSI-SINR measurement report mapping

Reported value	Measured quantity value (L3 SS-SINR and L3 CSI-SINR)	Measured quantity value (L1 SS-SINR and L1 CSI-SINR)	Unit
SINR_0	SINR<-23	SINR<-23	dB
SINR_1	-23≤ SINR<-22.5	-23≤SINR<-22.5	dB
SINR_2	-22.5≤ SINR<-22	-22.5≤SINR<-22	dB
SINR_3	-22≤ SINR<-21.5	-22≤SINR<-21.5	dB
SINR_4	-21.5≤ SINR<-21	-21.5≤SINR<-21	dB
..	..	..	…
SINR_123	38≤ SINR<38.5	38≤SINR<38.5	dB
SINR_124	38.5≤ SINR<39	38.5≤SINR<39	dB
SINR_125	39≤ SINR<39.5	39≤SINR<39.5	dB
SINR_126	39.5≤ SINR<40	39.5≤SINR<40	dB
SINR_127	40≤ SINR	40≤SINR	dB

Table 10.1.16.1-2: Differential SS-SINR and CSI-SINR measurement (for L1 reporting and L3 reporting) report mapping

Reported value	Measured quantity value (difference in measured SINR from largest SINR)	Unit
DIFFSINR_0	0≥ΔSINR>-1	dB
DIFFSINR_1	-1≥ΔSINR>-2	dB
DIFFSINR_2	-2≥ΔSINR>-3	dB

DIFFSINR_3	-3≥ΔSINR>-4	dB
DIFFSINR_4	-4≥ΔSINR>-5	dB
DIFFSINR_5	-5≥ΔSINR>-6	dB
DIFFSINR_6	-6≥ΔSINR>-7	dB
DIFFSINR_7	-7≥ΔSINR>-8	dB
DIFFSINR_8	-8≥ΔSINR>-9	dB
DIFFSINR_9	-9≥ΔSINR>-10	dB
DIFFSINR_10	-10≥ΔSINR>-11	dB
DIFFSINR_11	-11≥ΔSINR>-12	dB
DIFFSINR_12	-12≥ΔSINR>-13	dB
DIFFSINR_13	-13≥ΔSINR>-14	dB
DIFFSINR_14	-14≥ΔSINR>-15	dB
DIFFSINR_15	-15≥ΔSINR	dB

10.1.17 Power Headroom

10.1.17.1 Power Headroom Report

10.1.17.1.1 Power Headroom Report Mapping

The power headroom reporting range is from -32 ...+38 dB. Table 10.1.17.1-1 defines the report mapping.

Table 10.1.17.1-1: Power headroom report mapping

Reported value	Measured quantity value (dB)
POWER_HEADROOM_0	PH < -32
POWER_HEADROOM_1	-32 ≤ PH < -31
POWER_HEADROOM_2	-31 ≤ PH < -30
POWER_HEADROOM_3	-30 ≤ PH < -29
…	…
POWER_HEADROOM_53	20 ≤ PH < 21
POWER_HEADROOM_54	21 ≤ PH < 22
POWER_HEADROOM_55	22 ≤ PH < 24
POWER_HEADROOM_56	24 ≤ PH < 26
POWER_HEADROOM_57	26 ≤ PH < 28
POWER_HEADROOM_58	28 ≤ PH < 30
POWER_HEADROOM_59	30 ≤ PH < 32
POWER_HEADROOM_60	32 ≤ PH < 34
POWER_HEADROOM_61	34 ≤ PH < 36
POWER_HEADROOM_62	36 ≤ PH < 38
POWER_HEADROOM_63	PH ≥ 38

10.1.18 $P_{CMAX,c,f}$

The UE is required to report the UE configured maximum output power ($P_{CMAX,c,f}$) together with the power headroom. This clause defines the requirements for the $P_{CMAX,c,f}$ reporting.

10.1.18.1 Report Mapping

The $P_{CMAX,c,f}$ reporting range is defined from -29 dBm to 33 dBm with 1 dB resolution. Table 10.1.18.1-1 defines the reporting mapping.

Table 10.1.18.1-1 Mapping of $P_{CMAX,c,f}$

Reported value	Measured quantity value	Unit
PCMAX_C_00	$P_{CMAX,c,f} < -29$	dBm
PCMAX_C_01	$-29 \le P_{CMAX,c,f} < -28$	dBm
PCMAX_C_02	$-28 \le P_{CMAX,c,f} < -27$	dBm
…	…	…
PCMAX_C_61	$31 \le P_{CMAX,c,f} < 32$	dBm
PCMAX_C_62	$32 \le P_{CMAX,c,f} < 33$	dBm
PCMAX_C_63	$33 \le P_{CMAX,c,f}$	dBm

10.1.19 L1-RSRP accuracy requirements for FR1

10.1.19.1 SSB based L1-RSRP accuracy requirements

Unless otherwise specified, the requirements for absolute accuracy and relative accuracy of SSB based L1-RSRP in this clause apply to all SSBs of the serving cell configured for L1-RSRP measurement and all SSBs of cell(s) with different PCI from serving cell configured for L1-RSRP measurement in FR1.

10.1.19.1.1 Absolute Accuracy

The accuracy requirements in Table 10.1.19.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.4.1 for a corresponding Band for each relevant SSB.

Table 10.1.19.1.1-1: SSB based L1-RSRP absolute accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/Iot	Io [Note 1] range				
			NR operating band groups [Note 2]	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±5.0	±9.5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-70
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-70
			NR_TDD_FR1_C	-120	-117	N/A	-70
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-70
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-70
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-70
			NR_FDD_FR1_G	-118	-115	N/A	-70
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-70
±8.5	±11.5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H,	N/A	N/A	-70	-50

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2.

10.1.19.1.2 Relative Accuracy

The relative accuracy of SSB based L1-RSRP is defined as the L1-RSRP measured from one SSB compared to the largest measured value of L1-RSRP among all SSBs of the cell (serving cell or cell with different PCI from serving cell) on which UE performs L1-RSRP measurements.

The accuracy requirements in Table 10.1.19.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.4.1 for a corresponding Band for each relevant SSB.

Table 10.1.19.1.2-1: SSB based L1-RSRP relative accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/Iot Note 2	Io Note 1 range				
			NR operating band groups Note 4	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±3	±4	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The parameter SSB Ês/Iot is the minimum SSB Ês/Iot of the pair of SSBs to which the requirement applies.
NOTE 3: Void
NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.

10.1.19.2 CSI-RS based L1-RSRP accuracy requirements

10.1.19.2.1 Absolute Accuracy

Unless otherwise specified, the requirements for absolute accuracy of CSI-RS based L1-RSRP in this clause apply to all CSI-RS resources of the serving cell configured for L1-RSRP measurement.

The accuracy requirements in Table 10.1.19.2.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.4.2 for a corresponding Band for each relevant CSI-RS.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.

The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.19.2.1-1.

Table 10.1.19.2.1-1: CSI-RS based L1-RSRP absolute accuracy in FR1

Accuracy		Conditions						
Normal condition	Extreme condition	CSI-RS Ês/Iot	Io [Note 1] range					
			NR operating band groups [Note 2]	Minimum Io				Maximum Io
dB	dB	dB		dBm / SCS_{CSI-RS}			dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
				SCS_{CSI-RS} = 15 kHz	SCS_{CSI-RS} = 30 kHz	SCS_{CSI-RS} = 60 kHz		
±5.0	±9.5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-70
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-70
			NR_TDD_FR1_C	-120	-117	-114	N/A	-70
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-70
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-70
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-70
			NR_FDD_FR1_G	-118	-115	-112	N/A	-70
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-70
±8.5	±11.5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H	N/A	N/A	N/A	-70	-50

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2.

10.1.19.2.2 Relative Accuracy

The relative accuracy of CSI-RS based L1-RSRP is defined as the L1-RSRP measured from one CSI-RS compared to the largest measured value of L1-RSRP among all CSI-RS resources of the serving cell.

The accuracy requirements in Table 10.1.19.2.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.4.2 for a corresponding Band for each relevant CSI-RS.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.

The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.19.2.2-1.

Table 10.1.19.2.2-1: CSI-RS based L1-RSRP relative accuracy in FR1

Accuracy		Conditions	
Normal condition	Extreme condition	CSI-RS	Io [Note 1] range

		Ês/Iot Note 2						
			NR operating band groups Note 4	Minimum Io				Maximum Io
dB	dB	dB		dBm / SCS_{CSI-RS}			$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{CSI-RS} = 15 kHz	SCS_{CSI-RS} = 30 kHz	SCS_{CSI-RS} = 60 kHz		
±3	±4	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	-114	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	-112	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: The parameter CSI-RS Ês/Iot is the minimum CSI-RS Ês/Iot of the pair of CSI-RS resources to which the requirement applies. NOTE 3: Void NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.								

10.1.19C L1-RSRP accuracy requirements for FR1 SAN

10.1.19C.1 SSB based L1-RSRP accuracy requirements

10.1.19C.1.1 Absolute Accuracy

Unless otherwise specified, the requirements for absolute accuracy of SSB based L1-RSRP in this clause apply to all SSBs of the serving cell configured for L1-RSRP measurement.

The accuracy requirements in Table 10.1.19C.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.4.1 for a corresponding Band for each relevant SSB.
- Valid information for the SAN serving the target cell has been provided.

Table 10.1.19C.1.1-1: SSB based L1-RSRP absolute accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/Iot	Io Note 1 range				
			NR operating band groups Note 2	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±[5]	±[9.5]	≥-3	NR_FDD_SAB_FR1_A	-121	-118	N/A	-70
±[8.5]	±[11.5]	≥-3	NR_FDD_SAB_FR1_A	N/A	N/A	-70	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2.							

10.1.19C.1.2 Relative Accuracy

The relative accuracy of SSB based L1-RSRP is defined as the L1-RSRP measured from one SSB compared to the largest measured value of L1-RSRP among all SSBs of the serving cell.

The accuracy requirements in Table 10.1.19C.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.4.1 for a corresponding Band for each relevant SSB.
- Valid information for the SAN serving the target cell has been provided.

Table 10.1.19C.1.2-1: SSB based L1-RSRP relative accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/Iot Note 2	Io Note 1 range				
			NR operating band groups Note 4	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±[3]	±[4]	≥-3	NR_FDD_SAB_FR1_A	-121	-118	N/A	-50

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The parameter SSB Ês/Iot is the minimum SSB Ês/Iot of the pair of SSBs to which the requirement applies.
NOTE 3: Void
NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.

10.1.20 L1-RSRP accuracy requirements for FR2

10.1.20.1 SSB based L1-RSRP accuracy requirements

Unless otherwise specified, the requirements for absolute accuracy and relative accuracy of SSB based L1-RSRP in this clause apply to all SSBs of the serving cell configured for L1-RSRP measurement and all SSBs of cell(s) with different PCI from serving cell configured for L1-RSRP measurement in FR2.

10.1.20.1.1 Absolute Accuracy

The accuracy requirements in Table 10.1.20.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.4.1 for a corresponding Band for each relevant SSB.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.20.1.1-1: SSB based L1-RSRP absolute accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	SSB Ês/Iot	Io Note 1 range		
			Minimum Io		Maximum Io
dB	dB	dB	dBm / SCS_{SSB} Note 2	dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
			SCS_{SSB} = 120kHz / SCS_{SSB} = 240kHz		
±6.5	±9.5	≥-3	Same value as SSB_RP in Table B.2.4.1-2,	N/A	-70

			according to UE Power class, operating band and angle of arrival		
±8.5	±11.5	≥-3	N/A	-70	-50
NOTE 1: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth. NOTE 2: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival. NOTE 3: In the test cases, the SSB Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.					

10.1.20.1.2 Relative Accuracy

The relative accuracy of SSB based L1-RSRP is defined as the L1-RSRP measured from one SSB compared to the largest measured value of L1-RSRP among all SSBs of the cell (serving cell or cell with different PCI from serving cell) on which UE performs L1-RSRP measurements.

The accuracy requirements in Table 10.1.20.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.4.1 for a corresponding Band for each relevant SSB.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.20.1.2-1: SSB based L1-RSRP relative accuracy in FR2

Accuracy		**Conditions**		
Normal condition	**Extreme condition**	**SSB Ês/Iot**	**Io Note 1 range**	
			Minimum Io	**Maximum Io**
dB	**dB**	**dB**	**dBm / SCS_{SSB} Note 3**	**dBm/$BW_{Channel}$**
			SCS_{SSB} = 120kHz / **SCS_{SSB} = 240kHz**	
±6.5	±9.5	≥-3	Same value as SSB_RP in Table B.2.4.1-2, according to UE Power class, operating band and angle of arrival	-50
NOTE 1: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth. NOTE 2: The parameter SSB Ês/Iot is the minimum SSB Ês/Iot of the pair of SSBs to which the requirement applies. NOTE 3: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival. NOTE 4: In the test cases, the SSB Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.				

10.1.20.2 CSI-RS based L1-RSRP accuracy requirements

10.1.20.2.1 Absolute Accuracy

Unless otherwise specified, the requirements for absolute accuracy of CSI-RS based L1-RSRP in this clause apply to all CSI-RS resources of the serving cell configured for L1-RSRP measurement.

The accuracy requirements in Table 10.1.20.2.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.

- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.4.2 for a corresponding Band for each relevant CSI-RS.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.20.2.1-1.

Table 10.1.20.2.1-1: CSI-RS based L1-RSRP absolute accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	CSI-RS Ês/Iot	Io Note 1 range		
			Minimum Io		Maximum Io
dB	dB	dB	dBm / SCS_{CSI-RS} Note 2	dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
			SCS_{CSI-RS} = 60kHz / SCS_{CSI-RS} = 120kHz		
±6.5	±9.5	≥-3	Same value as CSI-RS_RP in Table B.2.4.2-2, according to UE Power class, operating band and angle of arrival	N/A	-70
±8.5	±11.5	≥-3	N/A	-70	-50

NOTE 1: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.
NOTE 2: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.
NOTE 3: In the test cases, the CSI-RS Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.

10.1.20.2.2 Relative Accuracy

The relative accuracy of CSI-RS based L1-RSRP is defined as the L1-RSRP measured from one CSI-RS compared to the largest measured value of L1-RSRP among all CSI-RS resources of the serving cell.

The accuracy requirements in Table 10.1.20.2.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.4.2 for a corresponding Band for each relevant CSI-RS.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.20.2.2-1.

Table 10.1.20.2.2-1: CSI-RS based L1-RSRP relative accuracy in FR2

Accuracy		Conditions		
Normal condition	Extreme condition	CSI-RS Ês/Iot	Io Note 1 range	
			Minimum Io	Maximum Io
dB	dB	dB	dBm / SCS_{CSI-RS}	dBm/$BW_{Channel}$
			SCS_{CSI-RS} = 60kHz / SCS_{CSI-RS} = 120kHz	
±6.5	±9.5	≥-3	Same value as CSI-RS RP in Table B.2.4.2-2, according to UE Power	-50

			class, operating band and angle of arrival	

NOTE 1: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.
NOTE 2: The parameter CSI-RS Ês/Iot is the minimum CSI-RS Ês/Iot of the pair of CSI-RS resources to which the requirement applies.
NOTE 3: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.
NOTE 4: In the test cases, the CSI-RS Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.

10.1.21 SFTD accuracy requirements

10.1.21.1 SFTD acuracy requirements for NE-DC

The SFN and frame timing difference (SFTD) is measured between PCell and E-UTRAN PSCell under NE-DC.

The accuracy requirements in Table 10.1.21.1-4 are appilicable under the following conditions:

For FR1 PCell SFN and frame timing measurement:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Io range deifined in Table 10.1.21.1-1.

Table 10.1.21.1-1: PCell Io range conditions in FR1

Parameter	**Io Note 1 range**			
	NR operating band groups Note 4, 5	**Minimum Io Note 2, 3**		**Maximum Io**
		dBm/ SCS_{SSB}		**dBm/$BW_{Channel}$**
		SCS_{SSB} = 15 kHz	**SCS_{SSB} = 30 kHz**	
Conditions	NR_FDD_FR1_A, NR_TDD_FR1_A	-121	-118	-50
	NR_FDD_FR1_B	-120.5	-117.5	-50
	NR_TDD_FR1_C	-120	-117	-50
	NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-50
	NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-50
	NR_FDD_FR1_F	-118.5	-115.5	-50
	NR_FDD_FR1_G	-118	-115	-50
	NR_FDD_FR1_H	-117.5	-114.5	-50

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The condition level is increased by $\Delta R_{IB,c}$ as defined in clause 7.3B in TS 38.101-3 [20], depending on E-UTRA – NR band combination.
NOTE 3: The condition level is increased by MSD as defined in clause 7.3B in TS 38.101-3 [20], if applicable depending on E-UTRA – NR band combination.
NOTE 4: NR operating band groups are as defined in clause 3.5.
NOTE 5: Only NR bands within EN-DC band combinations as specified in clause 5.5B in TS 38.101-3 [20] are applicable.

For FR2 PCell SFN and frame timing measurement:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Io range deifined in Table 10.1.21.1-2.

Table 10.1.21.1-2: PCell Io range conditions in FR2

Parameter	**Io Note 1 range**		
	Minimum Io Note 2, 3		**Maximum Io**
	dBm/ SCS_{SSB}		**dBm/$BW_{Channel}$**
	SCS_{SSB} = 15 kHz	**SCS_{SSB} = 30 kHz**	

Conditions	Same value as SSB_RP in Table B.2.4.1-2, according to UE Power class, operating band and angle of arrival	Same value as SSB_RP in Table B.2.4.1-2, according to UE Power class, operating band and angle of arrival	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth and specified at the Reference point. NOTE 2: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival. NOTE 3: In the test cases, the SSB Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.			

For E-UTRA PSCell SFN and frame timing measurement:

- Cell specific reference signals are transmitted either from one, two or four antenna ports.
- Conditions defined in TS 36.101 [25] Clause 7.3 for reference sensitivity are fulfilled.
- No changes to the uplink transmission timing are applied during the measurement period.
- $RSRP|_{dBm}$ according to Annex B.3.5 in TS 36.101 [25] for a corresponding Band.
- Io range deifined in Table 10.1.21.1-3.

Table 10.1.21.1-3: E-UTRA PSCell Io range conditions

Parameter	**Io Note 1 range**		
	E-UTRA operating band groups Note 3	**Minimum Io**	**Maximum Io**
Conditions		**dBm/15kHz Note 2**	**dBm/BW$_{Channel}$**
	FDD_A, TDD_A	-121	-50
	FDD_C, TDD_C	-120	-50
	FDD_D	-119.5	-50
	FDD_E, TDD_E	-119	-50
	FDD_F	-118.5	-50
	FDD_G	-118	-50
	FDD_H	-117.5	-50
	FDD_N	-114.5	-50
NOTE 1: When in dBm/15kHz, the minimum Io condition is expressed as the average Io per RE over all REs in that symbol. Io may be different in different symbols within a subframe. NOTE 2: The condition level is increased by $\Delta>0$, when applicable, as described in clauses B.4.2 and B.4.3 in TS36.133 [15]. NOTE 3: E-UTRA operating band groups are as defined in clause 3.5 in TS 36.133 [15].			

Table 10.1.21.1-4: SFTD measurement accuracy

Accuracy	**Conditions**	
	Ês/Iot Note 2	**Frequency range**
Ts Note 1	**dB**	
40*64*Tc	≥-3	FR1
40*64*Tc		FR2
NOTE 1: Tc is the basic timing unit defined in TS 38.211 [6]. NOTE 2: The parameter Ês/Iot is the minimum Ês/Iot of the pair of cells to which the requirement applies.		

10.1.21.2 SFTD acuracy requirements for NR-DC

The SFN and frame timing difference (SFTD) is measured between PCell in FR1 and PSCell in FR2 under NR dual connectivity.

The accuracy requirements in Table 10.1.21.2-3 are appilicable under the following conditions:

For FR1 PCell SFN and frame timing measurement:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Io range deifined in Table 10.1.21.2-1.

Table 10.1.21.2-1: PCell Io range conditions in FR1

Parameter	Io Note 1 range			
	NR operating band groups Note 2	Minimum Io		Maximum Io
		dBm/ SCS_{SSB}		dBm/$BW_{Channel}$
		SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz	
Conditions	NR_FDD_FR1_A, NR_TDD_FR1_A	-121	-118	-50
	NR_FDD_FR1_B	-120.5	-117.5	-50
	NR_TDD_FR1_C	-120	-117	-50
	NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-50
	NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-50
	NR_FDD_FR1_F	-118.5	-115.5	-50
	NR_FDD_FR1_G	-118	-115	-50
	NR_FDD_FR1_H	-117.5	-114.5	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: NR operating band groups are as defined in clause 3.5.2.				

For FR2 PSCell SFN and frame timing measurement:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Io range deifined in Table 10.1.21.2-2.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.21.2-2: PSCell Io range conditions in FR2

Parameter	Io Note 1 range		
	Minimum Io Note 2, 3		Maximum Io
	dBm/ SCS_{SSB}		dBm/$BW_{Channel}$
	SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz	
Conditions	Same value as SSB_RP in Table B.2.4.1-2, according to UE Power class, operating band and angle of arrival	Same value as SSB_RP in Table B.2.4.1-2, according to UE Power class, operating band and angle of arrival	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth and specified at the Reference point. NOTE 2: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival. NOTE 3: In the test cases, the SSB Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.			

Table 10.1.21.2-3: SFTD measurement accuracy

Accuracy	Conditions	
	Ês/Iot Note 2	Frequency range
Ts Note 1	dB	
40*64*Tc	≥ -3	Between FR1 and FR2
NOTE 1: Tc is the basic timing unit defined in TS 38.211 [6]. NOTE 2: The parameter Ês/Iot is the minimum Ês/Iot of the pair of cells to which the requirement applies.		

10.1.21.3 Inter frequency SFTD acuracy requirements

The SFN and frame timing difference (SFTD) is measured between PCell and inter-frequency neighbour cell.

The accuracy requirements in Table 10.1.21.3-3 are appilicable under the following conditions:

For FR1 PCell, inter frequency neighbour cell SFN and frame timing measurement:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Io range deifined in Table 10.1.21.3-1.

Table 10.1.21.3-1: PCell, inter frequency neighbour cell Io range conditions in FR1

Parameter	Io Note 1 range			
	NR operating band groups Note 2	Minimum Io		Maximum Io
		dBm/ SCS_{SSB}		dBm/$BW_{Channel}$
		SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz	
Conditions	NR_FDD_FR1_A, NR_TDD_FR1_A	-121	-118	-50
	NR_FDD_FR1_B	-120.5	-117.5	-50
	NR_TDD_FR1_C	-120	-117	-50
	NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-50
	NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-50
	NR_FDD_FR1_F	-118.5	-115.5	-50
	NR_FDD_FR1_G	-118	-115	-50
	NR_FDD_FR1_H	-117.5	-114.5	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: NR operating band groups are as defined in clause 3.5.2.				

For FR2 PCell, inter frequency neighbour cell SFN and frame timing measurement:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Io range deifined in Table 10.1.21.3-2.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.21.3-2: PCell, inter frequency neighbour cell Io range conditions in FR2

Parameter	Io Note 1 range		
	Minimum Io Note 2, 3		Maximum Io
	dBm/ SCS_{SSB}		dBm/$BW_{Channel}$
	SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz	
Conditions	Same value as SSB_RP in Table B.2.4.1-2, according to UE Power class, operating band and angle of arrival	Same value as SSB_RP in Table B.2.4.1-2, according to UE Power class, operating band and angle of arrival	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth and specified at the Reference point. NOTE 2: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival. NOTE 3: In the test cases, the SSB Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.			

Table 10.1.21.3-3: Inter frequency SFTD measurement accuracy

Accuracy	Conditions	
	Ês/Iot Note 2	Frequency range
Ts Note 1	dB	
40*64*Tc	≥ -3	FR1, FR2
NOTE 1: Tc is the basic timing unit defined in TS 38.211 [6]. NOTE 2: The parameter Ês/Iot is the minimum Ês/Iot of the pair of cells to which the requirement applies.		

10.1.22 CLI measurement accuracy requirements

10.1.22.1 SRS-RSRP

10.1.22.1.1 SRS-RSRP Accuracy

The SRS-RSRP measurement reported by the UE shall fulfil the accuracy requirements defined in Table 10.1.22.1.1-1 for FR1 and Table 10.1.22.1.1-2 for FR2, provided that the following conditions are met. The accuracy requirements in this clause are derived based on AWGN radio propagation conditions.

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for SRS-RSRP measurements are fulfilled according to Annex B.2.z for a corresponding Band for each relevant SRS resource configured for measurement.
- The time difference between UE's DL reference timing in the serving cell and SRS arrival time is no larger than $T_{error_SRS_RSRP}$, where
  - $T_{error_SRS_RSRP} = T_C \times N_{TA_offset}$ + 4.67us for FR1
  - $T_{error_SRS_RSRP} = T_C \times N_{TA_offset}$ + 3.67us for FR2
  - N_{TA_offset} is defined in Table 7.1.2-2
  - T_C is 0.509ns
- The number of SRS ports in the SRS resource configured for measurement is 1,
- The number of symbols in the SRS resource configured for measurement is 1,
- The number of repetitions in the SRS resource configured for measurement is 1,
- Frequency hopping, sequence group hopping or sequence hopping is disabled in the SRS resource configured for measurement,
- The bandwidth of the SRS resource is 48 PRBs.
- One of the following conditions is met
  - There is no other SRS resource with the same root sequence and on the same symbol and with same comb as the relevant SRS resource.
  - If multiple SRS resources are on the same symbol and with same comb, the distance between cyclic shifts of any two resources is no less than 6 if transmissionComb = n4, and no less than 4 if transmissionComb = n2.

Table 10.1.22.1.1-1: SRS-RSRP absolute accuracy in FR1

Accuracy						Conditions						
Normal condition			Extreme condition			SRS $\hat{E}_s/I_{ot}$	Io Note 1 range					
							NR operating band groups Note 2	Minimum Io				Maximum Io
dB						dB		dBm / SCS_{SRS}			dBm/BW Channel	dBm/BW Channel
SCS_{SRS} (kHz)			SCS_{SRS} (kHz)									
15	30	60	15	30	60			SCS_{SRS} = 15 kHz	SCS_{SRS} = 30 kHz	SCS_{SRS} = 60 kHz		
±3	±3.5	±5	±7.5	±8	±9.5	≥1	NR_TDD_FR1_A,	-120	-117	-114	N/A	-70

							NR_TDD_FR1_C	-119	-116	-113	N/A	-70
							NR_TDD_FR1_D	-118.5	-115.5	-112.5	N/A	-70
							NR_TDD_FR1_E	-118	-115	-112	N/A	-70
±6.5	±7	±8.5	±9.5	±10	±11.5	≥1	NR_TDD_FR1_A, NR_TDD_FR1_C, NR_TDD_FR1_D, NR_TDD_FR1_E	N/A	N/A	N/A	-70	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2.												

Table 10.1.22.1.1-2: SRS-RSRP absolute accuracy in FR2

Accuracy				**Conditions**			
Normal condition		**Extreme condition**		**SRS Ês/Iot**	**Io [Note 1] range**		
					Minimum Io		**Maximum Io**
dB				**dB**	**dBm / SCS_{SRS}** [Note 2]	**$dBm/BW_{Channel}$**	**$dBm/BW_{Channel}$**
SCS_{SRS} (kHz)		**SCS_{SRS} (kHz)**			**SCS_{SRS} = 60kHz**	**SCS_{SRS} = 120kHz**	
60	**120**	**60**	**120**				
±6	±8.5	±9	±11.5	≥1	Same value as SRS_RP in Table B.2.7-2, according to UE Power class, operating band and angle of arrival	N/A	-70
±9	±11.5	±11	±13.5	≥1	N/A	-70	-50
NOTE 1: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth. NOTE 2: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival. NOTE 3: In the test cases, the SSB Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.							

10.1.22.1.2 SRS-RSRP report mapping

The reporting range of SRS-RSRP is defined from -140 dBm to -44 dBm with 1 dB resolution. The mapping of measured quantity is defined in Table 10.1.22.1.2-1. The range in the signalling may be larger than the guaranteed accuracy range.

Table 10.1.22.1.2-1: SRS-RSRP measurement report mapping

Reported value	Measured quantity value	Unit
SRS-RSRP_0	SRS-RSRP<-140	dBm
SRS-RSRP_1	-140≤ SRS-RSRP<-139	dBm
SRS-RSRP_2	-139≤ SRS-RSRP<-138	dBm
SRS-RSRP_3	-138≤ SRS-RSRP<-137	dBm
SRS-RSRP_4	-137≤ SRS-RSRP<-136	dBm
..	..	…
SRS-RSRP_95	-46≤ SRS-RSRP<-45	dBm

SRS-RSRP_96	-45≤ SRS-RSRP<-44	dBm
SRS-RSRP_97	-44≤ SRS-RSRP	dBm
SRS-RSRP_98	Infinity	
Note: 'Infinity' means that UE cannot detect SRS due to too strong signal to measure.		

10.1.22.2 CLI-RSSI

10.1.22.2.1 CLI-RSSI Accuracy

The CLI-RSSI measurement reported by the UE shall fulfil the accuracy requirements defined in Table 10.1.22.2.1-1 for FR1 and Table 10.1.22.2.1-2 for FR2, provided that the following conditions are met.

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.

Table 10.1.22.2.1-1: CLI-RSSI absolute accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	Io [Note 1] range					
		NR operating band groups [Note 2]	Minimum Io				Maximum Io
dB	dB		dBm / SCS_{SRS}			$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
			SCS_{SRS} = 15 kHz	SCS_{SRS} = 30 kHz	SCS_{SRS} = 60 kHz		
±3.5	±6.5	NR_TDD_FR1_A,	-120	-117	-114	N/A	-70
		NR_TDD_FR1_C	-119	-116	-113	N/A	-70
		NR_TDD_FR1_D	-118.5	-115.5	-112.5	N/A	-70
		NR_TDD_FR1_E	-118	-115	-112	N/A	-70
±5.5	±8.5	Note 3	Note 3	Note 3	Note 3	-70	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2. NOTE 3: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.							

Table 10.1.22.2.1-2: CLI-RSSI absolute accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	Io [Note 1] range			
		Minimum Io			Maximum Io
dB	dB	dBm / SCS_{SRS} [Note 2]		$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
		SCS_{SRS} = 60kHz	SCS_{SRS} = 120kHz		
±5	±8	Same value as SRS_RP in Table B.2.7-2, according to UE Power class, operating band and angle of arrival		N/A	-70
±7	±10	Note 4		-70	-50
NOTE 1: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth. NOTE 2: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival. NOTE 3: In the test cases, the SSB Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table. NOTE 4: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.					

10.1.22.2.2 CLI-RSSI report mapping

The reporting range of CLI-RSSI is defined from -100 dBm to -25 dBm with 1 dB resolution. The mapping of measured quantity is defined in Table 10.1.22.2.2-1. The range in the signalling may be larger than the guaranteed accuracy range. UE shall scale the measured CLI-RSSI to report a nominal RSSI equivalent to 6RB measurement with 15kHz SCS.

Table 10.1.22.2.2-1: CLI-RSSI measurement report mapping

Reported value	Measured quantity value	Unit
CLI-RSSI_00	CLI-RSSI < -100	dBm
CLI-RSSI_01	-100 ≤ CLI-RSSI < -99	dBm
CLI-RSSI_02	-99 ≤ CLI-RSSI < -98	dBm
…	…	…
CLI-RSSI_74	-27 ≤ CLI-RSSI < -26	dBm
CLI-RSSI_75	-26 ≤ CLI-RSSI < -25	dBm
CLI-RSSI_76	-25 ≤ CLI-RSSI	dBm

10.1.23 RSTD Measurements

10.1.23.1 Introduction

The requirements in Clause 10.1.23 shall apply, provided the UE has received *nr-DL-TDOA-RequestLocationInformation* message from LMF via LPP [34] requesting the UE to report one or more DL RSTD measurements defined in TS 38.215 [4]. The requirements in Clause 10.1.23 shall apply:

- when UE is in RRC_CONNECTED state and the measurement is performed with MG or without MG,
- when UE is in RRC_INACTIVE state.

10.1.23.2 Measurement Accuracy Requirements

The accuracy requirements for RSTD measurement shall be within $\pm(X+Y+Z+\Delta)\ T_c$.

X is defined in Table 10.1.23.2-1 for AWGN channel and Table 10.1.23.2-3 for fading channel for FR1, provided that the following conditions are met.

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for RSTD measurements are fulfilled according to Annex B.2.14 for a corresponding Band for each relevant PRS resource configured for measurement.
- UE does not perform positioning measurement with reduced number of samples.

X is defined in Table 10.1.23.2-2 for AWGN channel and Table 10.1.23.2-4 for fading channel for FR2, provided that the following conditions are met.

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for RSTD measurements are fulfilled according to Annex B.2.14 for a corresponding Band for each relevant PRS resource configured for measurement.
- UE does not perform positioning measurement with reduced number of samples.

X is defined in Table 10.1.23.2-7 for AWGN channel in FR1 provided that the following conditions are met.

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.

- Conditions for RSTD measurements are fulfilled according to Annex B.2.14 for a corresponding Band for each relevant PRS resource configured for measurement.

- UE supports positioning measurement with reduced number of sample and is indicated by LMF to perform positioning measurement with reduced number of samples.

X is defined in Table 10.1.23.2-8 for AWGN channel in FR2 provided that the following conditions are met.

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.

- Conditions for RSTD measurements are fulfilled according to Annex B.2.14 for a corresponding Band for each relevant PRS resource configured for measurement.

- UE supports positioning measurement with reduced number of sample and is indicated by LMF to perform positioning measurement with reduced number of samples.

Note: The requriements for fading channel in this clause are derived based on TDL-A (30 ns delay spread, 5Hz) and TDL-C (60 ns delay spread, 300 Hz) channel models for FR1 and FR2 respectively.

When UE measures RSTD on PRS resources belonging to different PFLs, then the RSTD accuracy is defined as the accuracy corresponding to the largest accuracy value among different PFLs.

If the UE doesn't support Rx TEG reporting for RSTD measurement or when the measurements of reference cell and neighbour cell belong to different Rx TEGs, Y and Z are defined as follows:

- When UE measures RSTD on PRS resources belonging to same PFL, Y=32 Tc, provided that the time offset between the two PRS resource instances from the reference cell and the neighbor cell, which are used for a single RSTD estimate, is no greater than 160 ms.

- When UE measures RSTD on PRS resources belonging different PFLs, Y=256 Tc, provided that the time offset between the two PRS resource instances from the reference cell and the neighbor cell, which are used for a single RSTD estimate, is no greater than 1280 ms.

- Z is defined in Table 10.1.23.2-5 for FR1 and Table 10.1.23.2-6 for FR2, respectively.

- Δ is zero for single PFL, and is defined in Table 10.1.23.2-5a for FR1 and Table 10.1.23.2-6a for FR2, respectively, for dual PFL.

If the measurements of reference cell and neighbour cell belong to the same Rx TEG, i.e. associated and reported with a common Rx TEG ID, then the sum of Y+Z+Δ is equal to the timing error margin of the Rx TEG reported in *nr-UE-RxTEG-TimingErrorMargin*. The timing error margin reported via *nr-UE-RxTEG-TimingErrorMargin* cannot be larger than the value of (Y+Z+Δ) defined when the UE does not associate the measurements with the same Rx TEG.

Table 10.1.23.2-1: RSTD absolute accuracy in FR1 for AWGN channel

Accuracy	Conditions						
	PRS $\hat{E}s/Iot$	PRS SCS	PRS bandwidth Note 1	PRS resource repetition ($T_{rep}^{PRS} * L_{PRS} / K_{comb}^{PRS}$) Note 2	Io Note 3 range		
					NR operating band groups Note 4	Minimum Io	Maximum Io
Tc Note 5	dB	kHz	RB			dBm/SCS	dBm/BW$_{Channel}$
132	$(PRS\ \hat{E}s/Iot)_{ref} \geq -6dB$ $(PRS\ \hat{E}s/Iot)_i \geq -13dB$	15	≥ 24	≥ 4	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-50
					NR_FDD_FR1_B	-120.5	-50
					NR_TDD_FR1_C	-120	-50
					NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-50
					NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-50
					NR_FDD_FR1_F	-118.5	-50

					NR_FDD_FR1_G	-118	-50
					NR_FDD_FR1_H	-117.5	-50
98			≥ 52	≥ 1	Note 6	Note 6	Note 6
42			≥ 104	≥ 1	Note 6	Note 6	Note 6
75		30	≥ 24	≥ 4	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-118	-50
					NR_FDD_FR1_B	-117.5	-50
					NR_TDD_FR1_C	-117	-50
					NR_FDD_FR1_D, NR_TDD_FR1_D	-116.5	-50
					NR_FDD_FR1_E, NR_TDD_FR1_E	-116	-50
					NR_FDD_FR1_F	-115.5	-50
					NR_FDD_FR1_G	-115	-50
					NR_FDD_FR1_H	-114.5	-50
48			≥ 48	≥ 1	Note 6	Note 6	Note 6
24			≥ 132	≥ 1	Note 6	Note 6	Note 6
50		60	≥ 24	≥ 4	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-115	-50
					NR_FDD_FR1_B	-114.5	-50
					NR_TDD_FR1_C	-114	-50
					NR_FDD_FR1_D, NR_TDD_FR1_D	-113.5	-50
					NR_FDD_FR1_E, NR_TDD_FR1_E	-113	-50
					NR_FDD_FR1_F	-113.5	-50
					NR_FDD_FR1_G	-113	-50
					NR_FDD_FR1_H	-111.5	-50
24			≥ 64	≥ 1	Note 6	Note 6	Note 6
10			≥ 132	≥ 1	Note 6	Note 6	Note 6

NOTE 1: Minimum PRS bandwidth, which is minimum of the PRS bandwidths of the reference resource and the measured neighbour resource i.
NOTE 2: Minimum number of PRS resource repetitions among the reference resource and the measured neighbour resource i. $T_{\mathrm{rep}}^{\mathrm{PRS}}$, L_{PRS} , $K_{\mathrm{comb}}^{\mathrm{PRS}}$ are configured by higher layer parameter *dl-PRS-ResourceRepetitionFactor, dl-PRS-NumSymbols and dl-PRS-CombSizeN*defined in TS 37.355 [34], respectively.
NOTE 3: Io is assumed to have constant EPRE across the bandwidth.
NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.
NOTE 5: Tc is the basic timing unit defined in TS 38.211 [6].
NOTE 6: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth of the smallest RB number for the corresponding SCS.
NOTE 7: Void

Table 10.1.23.2-2: RSTD absolute accuracy in FR2 for AWGN channel

Accuracy	Conditions					
	PRS Ês/Iot	PRS SCS	PRS bandwidth Note 1	PRS resource repetition ($T_{rep}^{PRS} * L_{PRS} / K_{comb}^{PRS}$) Note 2	Io Note 3 range	
					Minimum Io	Maximum Io
Tc Note 4	dB	kHz	RB		dBm/SCS	$dBm/BW_{Channel}$
35	(PRS Ês/Iot)$_{ref}$ ≥ -6dB (PRS Ês/Iot)$_i$ ≥ -13dB	60	≥ 24	≥ 4	Same value as PRS_RP in Table B.2.z-2, according to UE Power class, operating band and angle of arrival	-50
24			≥ 64	≥ 1	Note 5	Note 5
11			≥ 132	≥ 1	Note 5	Note 5
24		120	≥ 32	≥ 4	Same value as PRS_RP in Table B.2.z-2, according to UE Power class, operating band and angle of arrival	-50
13			≥ 64	≥ 1	Note 5	Note 5
6			≥ 128	≥ 1	Note 5	Note 5

NOTE 1: Minimum PRS bandwidth, which is minimum of the PRS bandwidths of the reference resource and the measured neighbour resource i.
NOTE 2: Minimum number of PRS resource repetitions among the reference resource and the measured neighbour resource i. $T_{\text{rep}}^{\text{PRS}}$, L_{PRS}, $K_{\text{comb}}^{\text{PRS}}$ are configured by higher layer parameter *dl-PRS-ResourceRepetitionFactor, dl-PRS-NumSymbols and dl-PRS-CombSizeN*defined in TS 37.355 [34], respectively.
NOTE 3: Io is assumed to have constant EPRE across the bandwidth.
NOTE 4: Tc is the basic timing unit defined in TS 38.211 [6].
NOTE 5: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth of the smallest RB number for the corresponding SCS.
NOTE 6: Void

Table 10.1.23.2-3: RSTD absolute accuracy in FR1 for fading channel

Accuracy	Conditions						
	PRS $\hat{E}s/Iot$	PRS SCS	PRS bandwidth Note 1	PRS resource repetition ($T_{rep}^{PRS} * L_{PRS} / K_{comb}^{PRS}$) Note 2	Io Note 3 range		
					NR operating band groups Note 4	Minimum Io	Maximum Io
Tc Note 5	dB	kHz	RB			dBm/SCS	$dBm/BW_{Channel}$
247	(PRS $\hat{E}s/Iot)_{ref}$ ≥ -6dB (PRS $\hat{E}s/Iot)_i$ ≥ -13dB	15	≥ 24	≥ 4	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-50
					NR_FDD_FR1_B	-120.5	-50
					NR_TDD_FR1_C	-120	-50
					NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-50
					NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-50
					NR_FDD_FR1_F	-118.5	-50
					NR_FDD_FR1_G	-118	-50
					NR_FDD_FR1_H	-117.5	-50
140			≥ 52	≥ 1	Note 6	Note 6	Note 6
86			≥ 104	≥ 1	Note 6	Note 6	Note 6
118		30	≥ 24	≥ 4	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-118	-50
					NR_FDD_FR1_B	-117.5	-50
					NR_TDD_FR1_C	-117	-50
					NR_FDD_FR1_D, NR_TDD_FR1_D	-116.5	-50
					NR_FDD_FR1_E, NR_TDD_FR1_E	-116	-50
					NR_FDD_FR1_F	-115.5	-50
					NR_FDD_FR1_G	-115	-50
					NR_FDD_FR1_H	-114.5	-50
109			≥ 48	≥ 1	Note 6	Note 6	Note 6
28			≥ 132	≥ 1	Note 6	Note 6	Note 6
147		60	≥ 24	≥ 4	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-115	-50
					NR_FDD_FR1_B	-114.5	-50
					NR_TDD_FR1_C	-114	-50
					NR_FDD_FR1_D, NR_TDD_FR1_D	-113.5	-50
					NR_FDD_FR1_E, NR_TDD_FR1_E	-113	-50
					NR_FDD_FR1_F	-113.5	-50
					NR_FDD_FR1_G	-113	-50
					NR_FDD_FR1_H	-111.5	-50
27			≥ 64	≥ 1	Note 6	Note 6	Note 6
21			≥ 132	≥ 1	Note 6	Note 6	Note 6

NOTE 1: Minimum PRS bandwidth, which is minimum of the PRS bandwidths of the reference resource and the measured neighbour resource i.
NOTE 2: Minimum number of PRS resource repetitions among the reference resource and the measured neighbour resource i. $T_{\text{rep}}^{\text{PRS}}$, L_{PRS}, $K_{\text{comb}}^{\text{PRS}}$ are configured by higher layer parameter *dl-PRS-ResourceRepetitionFactor, dl-PRS-NumSymbols and dl-PRS-CombSizeN*defined in TS 37.355 [34], respectively.
NOTE 3: Io is assumed to have constant EPRE across the bandwidth.
NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.
NOTE 5: Tc is the basic timing unit defined in TS 38.211 [6].
NOTE 6: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth of the smallest RB number for the corresponding SCS.
NOTE 7: Void

Table 10.1.23.2-4: RSTD absolute accuracy in FR2 for fading channel

Accuracy	Conditions					
	PRS $\hat{E}s/Iot$	PRS SCS	PRS bandwidth Note 1	PRS resource repetition ($T_{rep}^{PRS} * L_{PRS} / K_{comb}^{PRS}$) Note 2	Io Note 3 range	
					Minimum Io	Maximum Io
Tc Note 4	dB	kHz	RB		dBm/SCS	$dBm/BW_{Channel}$
83	(PRS $\hat{E}s/Iot)_{ref}$ ≥ -6dB	60	≥ 24	≥ 4	Same value as PRS_RP in Table B.2.z-2, according to UE Power class, operating band and angle of arrival	-50
64			≥ 64	≥ 1	Note 5	Note 5
46			≥ 132	≥ 1	Note 5	Note 5
48	(PRS $\hat{E}s/Iot)_i$ ≥ -13dB	120	≥ 32	≥ 4	Same value as PRS_RP in Table B.2.z-2, according to UE Power class, operating band and angle of arrival	-50
54			≥ 64	≥ 1	Note 5	Note 5
36			≥ 128	≥ 1	Note 5	Note 5

NOTE 1: Minimum PRS bandwidth, which is minimum of the PRS bandwidths of the reference resource and the measured neighbour resource i.
NOTE 2: Minimum number of PRS resource repetitions among the reference resource and the measured neighbour resource i. $T_{\text{rep}}^{\text{PRS}}$, L_{PRS}, $K_{\text{comb}}^{\text{PRS}}$ are configured by higher layer parameter *dl-PRS-ResourceRepetitionFactor, dl-PRS-NumSymbols and dl-PRS-CombSizeN*defined in TS 37.355 [34], respectively.
NOTE 3: Io is assumed to have constant EPRE across the bandwidth.
NOTE 4: Tc is the basic timing unit defined in TS 38.211 [6].
NOTE 5: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth of the smallest RB number for the corresponding SCS.
NOTE 6: Void

Table 10.1.23.2-5: Margin for RSTD measurement accuracy in FR1

PRS BW (RB number)			Margin (Tc)
SCS=15kHz	SCS=30kHz	SCS=60kHz	
≥ 24	N/A	N/A	120
≥ 52	≥ 24	N/A	72
≥ 104	≥ 48	≥ 24	36
N/A	≥ 132	≥ 64	16
N/A	N/A	≥ 132	12

Table 10.1.23.2-5a: Margin Δ for RSTD measurement accuracy in FR1

PRS BW (RB number)			Margin (Tc)
SCS=15kHz	SCS=30kHz	SCS=60kHz	
≥ 24	N/A	N/A	128
≥ 52	≥ 24	N/A	64
≥ 104	≥ 48	≥ 24	32

N/A	≥ 132	≥ 64	16
N/A	N/A	≥ 132	8

Table 10.1.23.2-6: Margin for RSTD measurement accuracy in FR2

PRS BW (RB number)		Margin (Tc)
SCS=60kHz	SCS=120kHz	
≥ 24	N/A	72
≥ 64	≥ 32	32
≥ 132	≥ 64	16
N/A	≥ 128	12

Table 10.1.23.2-6a: Margin Δ for RSTD measurement accuracy in FR2

PRS BW (RB number)		Margin (Tc)
SCS=60kHz	SCS=120kHz	
≥ 24	N/A	32
≥ 64	≥ 32	16
≥ 132	≥ 64	8
N/A	≥ 128	4

Table 10.1.23.2-7: RSTD absolute accuracy in FR1 for AWGN channel with reduced number of samples

Accuracy	Conditions						
	PRS Ês/Iot	PRS SCS	PRS bandwidth Note 1	PRS resource repetition ($T_{rep}^{PRS} * L_{PRS} / K_{comb}^{PRS}$) Note 2	Io Note 3 range		
					NR operating band groups Note 4	Minimum Io	Maximum Io
Tc Note 5	dB	kHz	RB			dBm/SCS	$dBm/BW_{Channel}$
98	(PRS Ês/Iot)$_{ref}$ ≥ -3dB (PRS Ês/Iot)$_i$ ≥ -6dB	15	≥ 52	≥ 1	Note 6	Note 6	Note 6
42			≥ 104	≥ 1	Note 6	Note 6	Note 6
48		30	≥ 48	≥ 1	Note 6	Note 6	Note 6
24			≥ 132	≥ 1	Note 6	Note 6	Note 6
24		60	≥ 64	≥ 1	Note 6	Note 6	Note 6
10			≥ 132	≥ 1	Note 6	Note 6	Note 6

NOTE 1: Minimum PRS bandwidth, which is minimum of the PRS bandwidths of the reference resource and the measured neighbour resource i.
NOTE 2: Minimum number of PRS resource repetitions among the reference resource and the measured neighbour resource i. $T_{rep}^{PRS}, L_{PRS}, K_{comb}^{PRS}$ are configured by higher layer parameter *dl-PRS-ResourceRepetitionFactor, dl-PRS-NumSymbols and dl-PRS-CombSizeN*defined in TS 37.355 [34], respectively.
NOTE 3: Io is assumed to have constant EPRE across the bandwidth.
NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.
NOTE 5: Tc is the basic timing unit defined in TS 38.211 [6].
NOTE 6: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth of the smallest RB number for the corresponding SCS.
NOTE 7: Void

Table 10.1.23.2-8: RSTD absolute accuracy in FR2 for AWGN channel with reduced number of samples

Accuracy	Conditions					
	PRS Ês/Iot	PRS SCS	PRS bandwidth Note 1	PRS resource repetition ($T_{rep}^{PRS} * L_{PRS} / K_{comb}^{PRS}$) Note 2	Io Note 3 range	
					Minimum Io	Maximum Io
Tc Note 4	dB	kHz	RB		dBm/SCS	$dBm/BW_{Channel}$
24		60	≥ 64	≥ 1	Note 5	Note 5

11	(PRS Ês/Iot)$_{ref}$ ≥-3dB (PRS Ês/Iot)$_i$ ≥-6dB	120	≥ 132	≥ 1	Note 5	Note 5
13			≥ 64	≥ 1	Note 5	Note 5
6			≥ 128	≥ 1	Note 5	Note 5

NOTE 1: Minimum PRS bandwidth, which is minimum of the PRS bandwidths of the reference resource and the measured neighbour resource i.
NOTE 2: Minimum number of PRS resource repetitions among the reference resource and the measured neighbour resource i. $T_{\mathrm{rep}}^{\mathrm{PRS}}$, L_{PRS}, $K_{\mathrm{comb}}^{\mathrm{PRS}}$ are configured by higher layer parameter *dl-PRS-ResourceRepetitionFactor, dl-PRS-NumSymbols and dl-PRS-CombSizeN*defined in TS 37.355 [34], respectively.
NOTE 3: Io is assumed to have constant EPRE across the bandwidth.
NOTE 4: Tc is the basic timing unit defined in TS 38.211 [6].
NOTE 5: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth of the smallest RB number for the corresponding SCS.
NOTE 6: Void

10.1.23.3 Report mapping

10.1.23.3.1 Absolute DL RSTD Measurement Reporting

The reporting range for the DL RSTD measurement is defined from -985024×T_c to 985024×T_c with the resolution step of 2^k×T_c, where

T_c is defined in TS 38.211 [6],

$k_{min} \leq k \leq k_{max}$,

k_{min}=[2] and k_{max}=5, when configured PRS resource of at least one of the reference cell and neighbor cell measured for the RSTD measurement is in FR1,

k_{min}=0 and k_{max}=5, when configured PRS resource of both the reference cell and neighbor cell measured for the RSTD measurement are in FR2,

$k \geq$ *timingReportingGranularityFactor* [34] configured by LMF via LPP for the RSTD measurement.

The measurement report mapping for different *k* values are specified in Tables 10.1.23.3.1-1 – 10.1.23.3.1-6.

Table 10.1.23.3.1-1: Report mapping for *k*=0

Reported Quantity Value, RSTD_i	Measured Quantity Value, RSTD	Unit
RSTD_0000000	RSTD < -985024	T_c
RSTD_0000001	-985024 ≤ RSTD < -985023	T_c
RSTD_0000002	-985023 ≤ RSTD < -985022	T_c
…	…	…
RSTD_0985024	-1 ≤ RSTD < 0	T_c
RSTD_0985025	0 ≤ RSTD < 1	T_c
…	…	…
RSTD_1970047	985022 ≤ RSTD < 985023	T_c
RSTD_1970048	985023 ≤ RSTD < 985024	T_c
RSTD_1970049	985024 ≤ RSTD	T_c

Table 10.1.23.3.1-2: Report mapping for *k*=1

Reported Quantity Value, RSTD_i	Measured Quantity Value, RSTD	Unit
RSTD_000000	RSTD < -985024	T_c
RSTD_000001	-985024 ≤ RSTD < -985022	T_c
RSTD_000002	-985022 ≤ RSTD < -985020	T_c
…	…	…
RSTD_492512	-2 ≤ RSTD < 0	T_c

RSTD_492513	0 ≤ RSTD < 2	T_c
…	…	…
RSTD_985023	985020 ≤ RSTD < 985022	T_c
RSTD_985024	985022 ≤ RSTD < 985024	T_c
RSTD_985025	985024 ≤ RSTD	T_c

Table 10.1.23.3.1-3: Report mapping for *k*=2

Reported Quantity Value, RSTD_i	Measured Quantity Value, RSTD	Unit
RSTD_000000	RSTD < -985024	T_c
RSTD_000001	-985024 ≤ RSTD < -985020	T_c
RSTD_000002	-985020 ≤ RSTD < -985016	T_c
…	…	…
RSTD_246256	-4 ≤ RSTD < 0	T_c
RSTD_246257	0 ≤ RSTD < 4	T_c
…	…	…
RSTD_492511	985016 ≤ RSTD < 985020	T_c
RSTD_492512	985020 ≤ RSTD < 985024	T_c
RSTD_492513	985024 ≤ RSTD	T_c

Table 10.1.23.3.1-4: Report mapping for *k*=3

Reported Quantity Value RSTD_i	Measured Quantity Value, RSTD	Unit
RSTD_000000	RSTD < -985024	T_c
RSTD_000001	-985024 ≤ RSTD < -985016	T_c
RSTD_000002	-985016 ≤ RSTD < -985008	T_c
…	…	…
RSTD_123128	-8 ≤ RSTD < 0	T_c
RSTD_123129	0 ≤ RSTD < 8	T_c
…	…	…
RSTD_246255	985008 ≤ RSTD < 985016	T_c
RSTD_246256	985016 ≤ RSTD < 985024	T_c
RSTD_246257	985024 ≤ RSTD	T_c

Table 10.1.23.3.1-5: Report mapping for *k*=4

Reported Quantity Value, RSTD_i	Measured Quantity Value, RSTD	Unit
RSTD_000000	RSTD < -985024	T_c
RSTD_000001	-985024 ≤ RSTD < -985008	T_c
RSTD_000002	-985008 ≤ RSTD < -984992	T_c
…	…	…
RSTD_061564	-16 ≤ RSTD < 0	T_c
RSTD_061565	0 ≤ RSTD < 16	T_c
…	…	…
RSTD_123127	984992 ≤ RSTD < 985008	T_c
RSTD_123128	985008 ≤ RSTD < 985024	T_c
RSTD_123129	985024 ≤ RSTD	T_c

Table 10.1.23.3.1-6: Report mapping for *k*=5

Reported Quantity Value, RSTD_i	Measured Quantity Value, RSTD	Unit
RSTD_00000	RSTD < -985024	T_c
RSTD_00001	-985024 ≤ RSTD < -984992	T_c

RSTD_00002	-984992 ≤ RSTD < -984960	T_c
…	…	…
RSTD_30782	-32 ≤ RSTD < 0	T_c
RSTD_30783	0 ≤ RSTD < 32	T_c
…	…	…
RSTD_61563	984960 ≤ RSTD < 984992	T_c
RSTD_61564	984992 ≤ RSTD < 985024	T_c
RSTD_61565	985024 ≤ RSTD	T_c

10.1.23.3.2 Differential Reporting for DL RSTD Measurement

A first DL RSTD measurement is reported by means of differential reporting, i.e. as ΔRSTD, relative to a second DL RSTD measurement (RSTD2), provided that:

- the absolute measured quantity value of the second DL RSTD measurement (RSTD2) is not larger than the absolute measured quantity value of the first DL RSTD measurement (RSTD1), i.e., ΔRSTD=RSTD1-RSTD2≥0, and

- the absolute value of the second DL RSTD measurement (RSTD2) is reported together with ΔRSTD for the first DL RSTD measurement.

The reporting range for differential reporting ΔRSTD of the first DL RSTD measurement is defined from 0 up to $8191 \times T_c$ with the resolution step of $2^k \times T_c$, where

T_c is defined in TS 38.211 [6],

$k_{min} \leq k \leq k_{max}$,

k_{min}=[2] and k_{max}=5, when configured PRS resource of at least one of the reference cell and neighbor cell measured for the first RSTD measurement or second RSTD measurement is in FR1,

k_{min}=0 and k_{max}=5, when configured PRS resource of both the reference cell and neighbor cell measured for both of the first RSTD measurement and the second RSTD measurement are in FR2,

$k \geq$ *timingReportingGranularityFactor* [34] configured by LMF via LPP for the RSTD measurement.

The measurement report mapping for different *k* values are specified in Tables 10.1.23.3.2-1 – 10.1.23.3.2-6.

Table 10.1.23.3.2-1: Report mapping for *k*=0

Reported Quantity Value, DIFFRSTD_i	ΔRSTD = RSTD1 – RSTD2	Unit
DIFFRSTD_0000	0 ≤ ΔRSTD < 1	T_c
DIFFRSTD_0001	1 ≤ ΔRSTD < 2	T_c
DIFFRSTD_0002	2 ≤ ΔRSTD < 3	T_c
…	…	…
DIFFRSTD_8189	8189 ≤ ΔRSTD < 8190	T_c
DIFFRSTD_8190	8190 ≤ ΔRSTD < 8191	T_c
DIFFRSTD_8191	8191 ≤ ΔRSTD	T_c

Table 10.1.23.3.2-2: Report mapping for *k*=1

Reported Quantity Value, DIFFRSTD_i	ΔRSTD = RSTD1 – RSTD2	Unit
DIFFRSTD_0000	0 ≤ ΔRSTD < 2	T_c
DIFFRSTD_0001	2 ≤ ΔRSTD < 4	T_c
DIFFRSTD_0002	4 ≤ ΔRSTD < 6	T_c
…	…	…
DIFFRSTD_4093	8186 ≤ ΔRSTD < 8188	T_c
DIFFRSTD_4094	8188 ≤ ΔRSTD < 8190	T_c
DIFFRSTD_4095	8190 ≤ ΔRSTD	T_c

Table 10.1.23.3.2-3: Report mapping for *k*=2

Reported Quantity Value, DIFFRSTD_i	ΔRSTD = RSTD1 – RSTD2	Unit
DIFFRSTD_0000	0 ≤ ΔRSTD < 4	T_c
DIFFRSTD_0001	4 ≤ ΔRSTD < 8	T_c
DIFFRSTD_0002	8 ≤ ΔRSTD < 12	T_c
…	…	…
DIFFRSTD_2045	8180 ≤ ΔRSTD < 8184	T_c
DIFFRSTD_2046	8184 ≤ ΔRSTD < 8188	T_c
DIFFRSTD_2047	8188 ≤ ΔRSTD	T_c

Table 10.1.23.3.2-4: Report mapping for *k*=3

Reported Quantity Value, DIFFRSTD_i	ΔRSTD = RSTD1 – RSTD2	Unit
DIFFRSTD_0000	0 ≤ ΔRSTD < 8	T_c
DIFFRSTD_0001	8 ≤ ΔRSTD < 16	T_c
DIFFRSTD_0002	16 ≤ ΔRSTD < 24	T_c
…	…	…
DIFFRSTD_1021	8168 ≤ ΔRSTD < 8176	T_c
DIFFRSTD_1022	8176 ≤ ΔRSTD < 8184	T_c
DIFFRSTD_1023	8184 ≤ ΔRSTD	T_c

Table 10.1.23.3.2-5: Report mapping for *k*=4

Reported Quantity Value, DIFFRSTD_i	ΔRSTD = RSTD1 – RSTD2	Unit
DIFFRSTD_000	0 ≤ ΔRSTD < 16	T_c
DIFFRSTD_001	16 ≤ ΔRSTD < 32	T_c
DIFFRSTD_002	32 ≤ ΔRSTD < 48	T_c
…	…	…
DIFFRSTD_509	8144 ≤ ΔRSTD < 8160	T_c
DIFFRSTD_510	8160 ≤ ΔRSTD < 8176	T_c
DIFFRSTD_511	8176 ≤ ΔRSTD	T_c

Table 10.1.23.3.2-6: Report mapping for *k*=5

Reported Quantity Value, DIFFRSTD_i	ΔRSTD = RSTD1 – RSTD2	Unit
DIFFRSTD_000	0 ≤ ΔRSTD < 32	T_c
DIFFRSTD_001	32 ≤ ΔRSTD < 64	T_c
DIFFRSTD_002	64 ≤ ΔRSTD < 96	T_c
…	…	…
DIFFRSTD_253	8096 ≤ ΔRSTD < 8128	T_c
DIFFRSTD_254	8128 ≤ ΔRSTD < 8160	T_c
DIFFRSTD_255	8160 ≤ ΔRSTD	T_c

10.1.23.3.3 Additional Path Report Mapping for DL RSTD

The reporting range for the additional path reporting for an RSTD measurement is defined up to the range from $-8175\times T_c$ to $8175\times T_c$ with the resolution step of $2^k\times T_c$, where

T_c is defined in TS 38.211 [6],

$k_{min}\leq k\leq k_{max}$,

k_{min}=[2] and k_{max}=5, when configured PRS resource of at least one of the reference cell and neighbor cell measured for the RSTD measurement is in FR1,

k_{min}=0 and k_{max}=5, when configured PRS resource of both the reference cell and neighbor cell measured for the RSTD measurement are in FR2,

$k \geq$ *timingReportingGranularityFactor* [34] configured by LMF via LPP for the RSTD measurement.

The UE can report the timing of up to two additional paths with respect to the path timing determining the RSTD measurement.

A UE capable of *additionalPathsExtSupport-r17* can report the timing for a number additional paths, up to its capability, with respect to the path timing determining the RSTD measurement.

The report mappings for different *k* values are specified in Tables 10.1.23.3.3-1 – 10.1.23.3.3-6.

Table 10.1.23.3.3-1: Report mapping for *k*=0

Reported Quantity Value, path_i	Measured Quantity Value, Δpath	Unit
path_00000	Δpath < -8175	T_c
path_00001	-8175 ≤ Δpath < -8174	T_c
path_00002	-8174 ≤ Δpath < -8173	T_c
…	…	…
path_08175	-1 ≤ Δpath < 0	T_c
path_08176	0 ≤ Δpath < 1	T_c
…	…	…
path_ 16349	8173 ≤ Δpath < 8174	T_c
path_ 16350	8174 ≤ Δpath < 8175	T_c
path_ 16351	8175 ≤ Δpath	T_c

Table 10.1.23.3.3-2: Report mapping for *k*=1

Reported Quantity Value, path_i	Measured Quantity Value, Δpath	Unit
path_0000	Δpath < -8175	T_c
path_0001	-8175 ≤ Δpath < -8173	T_c
path_0002	-8173 ≤ Δpath < -8171	T_c
…	…	…
path_4088	-1 ≤ Δpath < 1	T_c
…	…	…
path_8174	8171 ≤ Δpath < 8173	T_c
path_8175	8173 ≤ Δpath < 8175	T_c
path_8176	8175 ≤ Δpath	T_c

Table 10.1.23.3.3-3: Report mapping for *k*=2

Reported Quantity Value, path_i	Measured Quantity Value, Δpath	Unit
path_0000	Δpath < -8174	T_c
path_0001	-8174 ≤ Δpath < -8170	T_c
path_0002	-8170 ≤ Δpath < -8166	T_c
…	…	…
path_2044	-2 ≤ Δpath < 2	T_c
…	…	…
path_4086	8166 ≤ Δpath < 8170	T_c
path_4087	8170 ≤ Δpath < 8174	T_c
path_4088	8174 ≤ Δpath	T_c

Table 10.1.23.3.3-4: Report mapping for *k*=3

Reported Quantity Value, path_i	Measured Quantity Value, Δpath	Unit

path_0000	Δpath < -8172	T_c
path_0001	-8172 ≤ Δpath < -8164	T_c
path_0002	-8164 ≤ Δpath < -8156	T_c
…	…	…
path_1022	-4 ≤ Δpath < 4	T_c
…	…	…
path_2042	8156 ≤ Δpath < 8164	T_c
path_2043	8164 ≤ Δpath < 8172	T_c
path_2044	8172 ≤ Δpath	T_c

Table 10.1.23.3.3-5: Report mapping for *k*=4

Reported Quantity Value, path_i	Measured Quantity Value, Δpath	Unit
path_0000	Δpath < -8168	T_c
path_0001	-8168 ≤ Δpath < -8152	T_c
path_0002	-8152 ≤ Δpath < -8136	T_c
…	…	…
path_511	-8 ≤ Δpath < 8	T_c
…	…	…
path_1020	8136 ≤ Δpath < 8152	T_c
path_1021	8152 ≤ Δpath < 8168	T_c
path_1022	8168 ≤ Δpath	T_c

Table 10.1.23.3.3-6: Report mapping for *k*=5

Reported Quantity Value, path_i	Measured Quantity Value, Δpath	Unit
path_000	Δpath < -8160	T_c
path_001	-8160 ≤ Δpath < -8128	T_c
path_002	-8128 ≤ Δpath < -8096	T_c
…	…	…
path_256	0 ≤ Δpath < 32	T_c
…	…	…
path_509	8096 ≤ Δpath < 8128	T_c
path_510	8128 ≤ Δpath < 8160	T_c
path_511	8160 ≤ Δpath	T_c

10.1.24 PRS-RSRP Measurements

10.1.24.1 Introduction

The requirements in Clause 10.1.24 shall apply, provided the UE has received *nr-DL-TDOA-RequestLocationInformation* or *nr-Multi-RTT-RequestLocationInformation* or *nr-DL-AoD-RequestLocationInformation* message from LMF via LPP [34] requesting the UE to report one or more DL PRS-RSRP measurements defined in TS 38.215 [4].

The requirements in clause 10.1.24 apply for UE in RRC_CONNECTED, including PRS-RSRP measurement with MG and outside MG, as well as for UE in RRC_INACTIVE. For PRS-RSRP measurement in FR2, the requirements apply with and without reduced Rx beam sweeping factor.

10.1.24.2 Measurement Accuracy Requirements

10.1.24.2.1 Absolute PRS RSRP accuracy

The absolute accuracy requirements for PRS-RSRP measurement for FR1 defined in Table 10.1.24.2.1-1 are valid under the following conditions:

- Conditions defined in 38.101-1 Clause 7.3 for reference sensitivity are fulfilled.
- PRP $1,2|_{dBm}$ according to Annex B.2.14 for a corresponding Band
- UE does not support positioning measurements with reduced number of samples, or LMF does not indicate UE to perform positioning measurements with reduced number of samples

The absolute accuracy requirements for PRS-RSRP measurement for FR2 defined in Table 10.1.24.2.1-2 are valid under the following conditions:

- Conditions defined in 38.101-2 Clause 7.3 for reference sensitivity are fulfilled.
- PRP $1,2|_{dBm}$ according to Annex B.2.14 for a corresponding Band
- UE does not support positioning measurements with reduced number of samples, or LMF does not indicate UE to perform positioning measurements with reduced number of samples

Table 10.1.24.2.1-1: PRS-RSRP absolute accuracy for FR1

Accuracy		Conditions							
					Io Note 7 range				
Normal condition	Extreme condition	PRS $\hat{E}_s/I_{ot}$	PRS BW	Repetition factor ($T_{rep}^{PRS} * L_{PRS}/K_{comb}^{PRS}$)	NR operating band groups Note 8	Minimum Io Note 1 dBm / SCS_{PRS}			Maximum Io
						dBm / SCS_{PRS}			dBm/$BW_{Channel}$
dB	dB	dB	PRB	-		dBm/15kHz Note 6	dBm/30kHz Note 6	dBm/60kHz Note 6	
±3.5	±8	≥-3dB	≥24	All	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-127	-124	-121	-50
					NR_FDD_FR1_B	-126.5	-123.5	-120.5	-50
					NR_TDD_FR1_C	-126	-123	-120	-50
					NR_FDD_FR1_D, NR_TDD_FR1_D	-125.5	-122.5	-119.5	-50
					NR_FDD_FR1_E, NR_TDD_FR1_E	-125	-122	-119	-50
					NR_FDD_FR1_F	-124.5	-121.5	-118.5	-50
					NR_FDD_FR1_G	-124	-121	-118	-50
					NR_FDD_FR1_H	-123.5	-120.5	-117.5	-50
					Note 4				
					Note 4				
±8.5	±13	≥-13dB	24 ≤ BW ≤ 52	All	Note 4				
±6	±10.5		52< BW≤ 104	All	Note 4				
±4.5	±9		BW >104	All	Note 4				

NOTE 1: This minimum Io condition is expressed as the average Io per RE over all REs in an OFDM symbol.
NOTE 2: Void.
NOTE 3: PRS bandwidth is as indicated in *prs-Bandwidth* in the OTDOA or DL-AoD assistance data defined in [34].

NOTE 4: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth ≥ 24 RB.
NOTE 5: The serving cell, the reference cell, and the measured neighbour cell i are on the same carrier frequency.
NOTE 6: The condition level is increased by Δ>0, when applicable, as described in Sections B.3.2 and B.3.3.
NOTE 7: The Io is defined in PRS positioning subframes. The same Io range applies to PRS and non-PRS symbols. Io levels are different in PRS and non-PRS symbols within the same subframe.
NOTE 8: NR operating band groups are as defined in Section 3.5.2.

Table 10.1.24.2.1-2: PRS-RSRP absolute accuracy for FR2

Accuracy		Conditions				
					Io Note 7 range	
Normal condition	Extreme condition	PRS Ês/Iot	PRS BW	Repetition factor ($T_{rep}^{PRS} * L_{PRS} / K_{comb}^{PRS}$)	Minimum Io Note 1 dBm / SCS_{PRS}	Maximum Io
dB	dB	dB	PRB	-	dBm / SCS_{PRS}	dBm/$BW_{Channel}$
					dBm/120kHz Note 6 / dBm/60kHz Note 6	
±5	±8	≥-3dB	≥24	All	Same value as PRP in Table B.2.14-2, according to UE Power class, operating band and angle of arrival	-50
					Note 4	
					Note 4	
±8.5	±11.5	≥-13dB	24 ≤ BW ≤ 64	All	Note 4	
±6	±9		BW >64	All	Note 4	

NOTE 1: This minimum Io condition is expressed as the average Io per RE over all REs in an OFDM symbol.
NOTE 2: Void.
NOTE 3: PRS bandwidth is as indicated in *prs-Bandwidth* in the OTDOA or DL-AoD assistance data defined in [34].
NOTE 4: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth ≥ 24 RB.
NOTE 5: The serving cell, the reference cell, and the measured neighbour cell i are on the same carrier frequency.
NOTE 6: The condition level is increased by Δ>0, when applicable, as described in Sections B.3.2 and B.3.3.
NOTE 7: The Io is defined in PRS positioning subframes. The same Io range applies to PRS and non-PRS symbols. Io levels are different in PRS and non-PRS symbols within the same subframe.
NOTE 8: NR operating band groups are as defined in Section 3.5.2.

The absolute accuracy requirements for PRS-RSRP measurement for FR1 defined in Table 10.1.24.2.1-3 are valid under the following conditions:

- Conditions defined in 38.101-1 Clause 7.3 for reference sensitivity are fulfilled.
- PRP $1,2|_{dBm}$ according to Annex B.2.14 for a corresponding Band
- UE supports positioning measurements with reduced number of samples, and LMF indicates UE to perform positioning measurements with reduced number of samples
- AWGN channel

The absolute accuracy requirements for PRS-RSRP measurement for FR2 defined in Table 10.1.24.2.1-4 are valid under the following conditions:

- Conditions defined in 38.101-2 Clause 7.3 for reference sensitivity are fulfilled.
- PRP $1,2|_{dBm}$ according to Annex B.2.14 for a corresponding Band
- UE supports positioning measurements with reduced number of samples, and LMF indicates UE to perform positioning measurements with reduced number of samples
- AWGN channel

Table 10.1.24.2.1-3: PRS-RSRP absolute accuracy for FR1 with reduced sample number

Accuracy		Conditions							
Normal condition	Extreme condition	PRS Ês/Iot	PRS BW	Repetition factor ($T_{rep}^{PRS} * L_{PRS} / K_{comb}^{PRS}$)	Io Note 6 range				
					NR operating band groups Note 7	Minimum Io Note 1 dBm / SCS_{PRS}			Maximum Io
						dBm / SCS_{PRS}			
dB	dB	dB	PRB	-		dBm/15kHz Note 5	dBm/30kHz Note 5	dBm/60kHz Note 5	$dBm/BW_{Channel}$
±3.5	±8	≥0	≥48	All	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-127	-124	-121	-50
					NR_FDD_FR1_B	-126.5	-123.5	-120.5	-50
					NR_TDD_FR1_C	-126	-123	-120	-50
					NR_FDD_FR1_D, NR_TDD_FR1_D	-125.5	-122.5	-119.5	-50
					NR_FDD_FR1_E, NR_TDD_FR1_E	-125	-122	-119	-50
					NR_FDD_FR1_F	-124.5	-121.5	-118.5	-50
					NR_FDD_FR1_G	-124	-121	-118	-50
					NR_FDD_FR1_H	-123.5	-120.5	-117.5	-50
±8.5	±13	≥-6	48 ≤ BW ≤ 52	All	Note 3				
±6	±10.5		52< BW≤ 104	All	Note 3				
±4.5	±9		BW >104	All	Note 3				

NOTE 1: This minimum Io condition is expressed as the average Io per RE over all REs in an OFDM symbol.
NOTE 2: PRS bandwidth is as indicated in *prs-Bandwidth* in the OTDOA or DL-AoD assistance data defined in [34].
NOTE 3: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth ≥ 48 RB.
NOTE 4: The serving cell, the reference cell, and the measured neighbour cell i are on the same carrier frequency.
NOTE 5: The condition level is increased by Δ>0, when applicable, as described in Sections B.3.2 and B.3.3.
NOTE 6: The Io is defined in PRS positioning subframes. The same Io range applies to PRS and non-PRS symbols. Io levels are different in PRS and non-PRS symbols within the same subframe.
NOTE 7: NR operating band groups are as defined in Section 3.5.2.

Table 10.1.24.2.1-4: PRS-RSRP absolute accuracy for FR2 with reduced sample number

Accuracy		Conditions					
Normal condition	Extreme condition	PRS Ês/Iot	PRS BW	Repetition factor ($T_{rep}^{PRS} * L_{PRS} / K_{comb}^{PRS}$)	Io Note 6 range		
					Minimum Io Note 1 dBm / SCS_{PRS}		Maximum Io
					dBm / SCS_{PRS}		
dB	dB	dB	PRB	-	dBm/120kHz Note 5	dBm/60kHz Note 5	$dBm/BW_{Channel}$
±5	±8	≥0	≥48	All	Same value as PRP in Table B.2.14-2, according to UE Power class, operating band and angle of arrival		-50
±8.5	±11.5	≥-6	48 ≤ BW ≤ 64	All	Note 3		
±6	±9		BW >64	All	Note 3		

NOTE 1: This minimum Io condition is expressed as the average Io per RE over all REs in an OFDM symbol.
NOTE 2: PRS bandwidth is as indicated in *prs-Bandwidth* in the OTDOA or DL-AoD assistance data defined in [34].
NOTE 3: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth ≥ 48 RB.
NOTE 4: The serving cell, the reference cell, and the measured neighbour cell i are on the same carrier frequency.
NOTE 5: The condition level is increased by Δ>0, when applicable, as described in Sections B.3.2 and B.3.3.
NOTE 6: The Io is defined in PRS positioning subframes. The same Io range applies to PRS and non-PRS symbols. Io levels are different in PRS and non-PRS symbols within the same subframe.

NOTE 7: NR operating band groups are as defined in Section 3.5.2.

10.1.24.2.2 Relative PRS RSRP accuracy

The relative accuracy of PRS-RSRP is defined as accuracy of the difference between two PRS-RSRP measurements.

The relative PRS-RSRP accuracy requirements apply for the cases when PRS-RSRP is measured from PRS resources in the same PRS resource set in FR1 or FR2, and measured with same Rx beam in case of FR2.

The accuracy requirements for PRS-RSRP measurement for FR1 defined in Table 10.1.24.2.2-1 are valid under the following conditions:

- Conditions defined in 38.101-1 Clause 7.3 for reference sensitivity are fulfilled.
- PRP $1,2|_{dBm}$ according to Annex B.2.14 for a corresponding Band
- UE does not support positioning measurements with reduced number of samples, or LMF does not indicate UE to perform positioning measurements with reduced number of samples

The accuracy requirements for PRS-RSRP measurement for FR2 defined in Table 10.1.24.2.2-2 are valid under the following conditions:

- Conditions defined in 38.101-2 Clause 7.3 for reference sensitivity are fulfilled.
- PRP $1,2|_{dBm}$ according to Annex B.2.14 for a corresponding Band
- UE does not support positioning measurements with reduced number of samples, or LMF does not indicate UE to perform positioning measurements with reduced number of samples

Table 10.1.24.2.2-1: PRS-RSRP relative accuracy for FR1

Accuracy		Conditions							
					Io Note 7 range				
Normal condition	Extreme condition	PRS $\hat{E}s/Iot$	PRS BW	Repetition factor ($T_{rep}^{PRS} * L_{PRS} / K_{comb}^{PRS}$)	NR operating band groups Note 8	Minimum Io Note 1 dBm / SCS_{PRS}			Maximum Io
						dBm / SCS_{PRS}			dBm/$BW_{Channel}$
dB	dB	dB	PRB	-		dBm/15kHz Note 6	dBm/30kHz Note 6	dBm/60kHz Note 6	
[±3.5]	±5.0	≥-3dB	≥24	All	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-127	-124	-121	-50
					NR_FDD_FR1_B	-126.5	-123.5	-120.5	-50
					NR_TDD_FR1_C	-126	-123	-120	-50
					NR_FDD_FR1_D, NR_TDD_FR1_D	-125.5	-122.5	-119.5	-50
					NR_FDD_FR1_E, NR_TDD_FR1_E	-125	-122	-119	-50
					NR_FDD_FR1_F	-124.5	-121.5	-118.5	-50
					NR_FDD_FR1_G	-124	-121	-118	-50

					NR_FDD_FR1_H	-123.5	-120.5	-117.5	-50
					Note 4				
					Note 4				
±9.5	±11.0	≥-13dB	24 ≤ BW ≤ 52	All	Note 4				
±6.5	±8.0		52< BW≤ 104	All	Note 4				
±5.0	±6.5		BW >104	All	Note 4				

NOTE 1: This minimum Io condition is expressed as the average Io per RE over all REs in an OFDM symbol.
NOTE 2: Void.
NOTE 3: PRS bandwidth is as indicated in *prs-Bandwidth* in the OTDOA or DL-AoD assistance data defined in [34].
NOTE 4: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth ≥ 24 RB.
NOTE 5: The serving cell, the reference cell, and the measured neighbour cell i are on the same carrier frequency.
NOTE 6: The condition level is increased by Δ>0, when applicable, as described in Sections B.3.2 and B.3.3.
NOTE 7: The Io is defined in PRS positioning subframes. The same Io range applies to PRS and non-PRS symbols. Io levels are different in PRS and non-PRS symbols within the same subframe.
NOTE 8: NR operating band groups are as defined in Section 3.5.2.

Table 10.1.24.2.2-2: PRS-RSRP relative accuracy for FR2

Accuracy		**Conditions**				
					Io Note 7 range	
Normal condition	**Extreme condition**	**PRS Ês/Iot**	**PRS BW**	**Repetition factor** ($T_{rep}^{PRS} * L_{PRS} / K_{comb}^{PRS}$)	**Minimum Io Note 1 dBm / SCS_{PRS}**	**Maximum Io**
dB	**dB**	**dB**	**PRB**	**-**	**dBm / SCS_{PRS}**	**$dBm/BW_{Channel}$**
					dBm/120kHz Note 6 / **dBm/60kHz Note 6**	
±5.0	±8.0	≥-3dB	≥24	All	Same value as PRP in Table B. B.2.14-2, according to UE Power class, operating band and angle of arrival	-50
					Note 4	
					Note 4	
±10	±13	≥-13dB	24 ≤ BW ≤ 64	All	Note 4	
±7.5	±10.5		BW >64	All	Note 4	

NOTE 1: This minimum Io condition is expressed as the average Io per RE over all REs in an OFDM symbol.
NOTE 2: Void.
NOTE 3: PRS bandwidth is as indicated in *prs-Bandwidth* in the OTDOA or DL-AoD assistance data defined in [34].
NOTE 4: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth ≥ 24 RB.
NOTE 5: The serving cell, the reference cell, and the measured neighbour cell i are on the same carrier frequency.
NOTE 6: The condition level is increased by Δ>0, when applicable, as described in Sections B.3.2 and B.3.3.
NOTE 7: The Io is defined in PRS positioning subframes. The same Io range applies to PRS and non-PRS symbols. Io levels are different in PRS and non-PRS symbols within the same subframe.
NOTE 8: NR operating band groups are as defined in Section 3.5.2.

The absolute accuracy requirements for PRS-RSRP measurement for FR1 defined in Table 10.1.24.2.2-3 are valid under the following conditions:

- Conditions defined in 38.101-1 Clause 7.3 for reference sensitivity are fulfilled.
- PRP $1,2|_{dBm}$ according to Annex B.2.14 for a corresponding Band
- UE supports positioning measurements with reduced number of samples, and LMF indicates UE to perform positioning measurements with reduced number of samples

- AWGN channel

The absolute accuracy requirements for PRS-RSRP measurement for FR2 defined in Table 10.1.24.2.2-4 are valid under the following conditions:

- Conditions defined in 38.101-2 Clause 7.3 for reference sensitivity are fulfilled.
- PRP $1,2|_{dBm}$ according to Annex B.2.14 for a corresponding Band
- UE supports positioning measurements with reduced number of samples, and LMF indicates UE to perform positioning measurements with reduced number of samples
- AWGN channel

Table 10.1.24.2.2-3: PRS-RSRP relative accuracy for FR1 with reduced sample number

Accuracy		Conditions							
					Io Note 6 range				
Normal condition	Extreme condition	PRS Ês/Iot	PRS BW	Repetition factor ($T_{rep}^{PRS} * L_{PRS} / K_{comb}^{PRS}$)	NR operating band groups Note 7	Minimum Io Note 1 dBm / SCS_{PRS}			Maximum Io
						dBm / SCS_{PRS}			dBm/$BW_{Channel}$
dB	dB	dB	PRB	-		dBm/15kHz Note 5	dBm/30kHz Note 5	dBm/60kHz Note 5	
[±3.5]	±5.0	≥0	≥48	All	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-127	-124	-121	-50
					NR_FDD_FR1_B	-126.5	-123.5	-120.5	-50
					NR_TDD_FR1_C	-126	-123	-120	-50
					NR_FDD_FR1_D, NR_TDD_FR1_D	-125.5	-122.5	-119.5	-50
					NR_FDD_FR1_E, NR_TDD_FR1_E	-125	-122	-119	-50
					NR_FDD_FR1_F	-124.5	-121.5	-118.5	-50
					NR_FDD_FR1_G	-124	-121	-118	-50
					NR_FDD_FR1_H	-123.5	-120.5	-117.5	-50
±9.5	±11.0	≥-6	48 ≤ BW ≤ 52	All	Note 3				
±6.5	±8.0		52< BW≤ 104	All	Note 3				
±5.0	±6.5		BW >104	All	Note 3				

NOTE 1: This minimum Io condition is expressed as the average Io per RE over all REs in an OFDM symbol.
NOTE 2: PRS bandwidth is as indicated in *prs-Bandwidth* in the OTDOA or DL-AoD assistance data defined in [34].
NOTE 3: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth ≥ 48 RB.
NOTE 4: The serving cell, the reference cell, and the measured neighbour cell i are on the same carrier frequency.
NOTE 5: The condition level is increased by Δ>0, when applicable, as described in Sections B.3.2 and B.3.3.
NOTE 6: The Io is defined in PRS positioning subframes. The same Io range applies to PRS and non-PRS symbols. Io levels are different in PRS and non-PRS symbols within the same subframe.
NOTE 7: NR operating band groups are as defined in Section 3.5.2.

Table 10.1.24.2.2-4: PRS-RSRP relative accuracy for FR2 with reduced sample number

Accuracy		Conditions				
					Io Note 6 range	
Normal condition	Extreme condition	PRS Ês/Iot	PRS BW	Repetition factor ($T_{rep}^{PRS} * L_{PRS} / K_{comb}^{PRS}$)	Minimum Io Note 1 dBm / SCS_{PRS}	Maximum Io
dB	dB	dB	PRB	-	dBm / SCS_{PRS}	

					dBm/120kHz Note 5	dBm/60kHz Note 5	dBm/BW$_{Channel}$
±5.0	±8.0	≥0	≥48	All	Same value as PRP in Table B.2.14-2, according to UE Power class, operating band and angle of arrival		-50
±10	±13	≥-6	48 ≤ BW ≤ 64	All	Note 3		
±7.5	±10.5		BW >64	All	Note 3		

NOTE 1: This minimum Io condition is expressed as the average Io per RE over all REs in an OFDM symbol.
NOTE 2: PRS bandwidth is as indicated in *prs-Bandwidth* in the OTDOA or DL-AoD assistance data defined in [34].
NOTE 3: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth ≥ 24 RB.
NOTE 4: The serving cell, the reference cell, and the measured neighbour cell i are on the same carrier frequency.
NOTE 5: The condition level is increased by Δ>0, when applicable, as described in Sections B.3.2 and B.3.3.
NOTE 6: The Io is defined in PRS positioning subframes. The same Io range applies to PRS and non-PRS symbols. Io levels are different in PRS and non-PRS symbols within the same subframe.
NOTE 8: NR operating band groups are as defined in Section 3.5.2.

10.1.24.3 Report mapping

10.1.24.3.1 Absolute PRS-RSRP Measurement Report Mapping

The reporting range of absolute PRS-RSRP measurement is defined from -156 dBm to -31 dBm with 1 dB resolution.

The mapping of measured quantity is defined in Table 10.1.24.3.1-1. The range in the signalling may be larger than the guaranteed accuracy range.

Table 10.1.24.3.1-1: Measurement report mapping for PRS-RSRP

Reported value	Measured quantity value	Unit
PRS_RSRP_0	PRS-RSRP<-156	dBm
PRS_RSRP_1	-156≤PRS-RSRP<-155	dBm
PRS_RSRP_2	-155≤PRS-RSRP<-154	dBm
PRS_RSRP_3	-154≤PRS-RSRP<-153	dBm
PRS_RSRP_4	-153≤PRS-RSRP<-152	dBm
PRS_RSRP_5	-152≤PRS-RSRP<-151	dBm
PRS_RSRP_6	-151≤PRS-RSRP<-150	dBm
PRS_RSRP_7	-150≤PRS-RSRP<-149	dBm
PRS_RSRP_8	-149≤PRS-RSRP<-148	dBm
PRS_RSRP_9	-148≤PRS-RSRP<-147	dBm
PRS_RSRP_10	-147≤PRS-RSRP<-146	dBm
PRS_RSRP_11	-146≤PRS-RSRP<-145	dBm
PRS_RSRP_12	-145≤PRS-RSRP<-144	dBm
PRS_RSRP_13	-144≤PRS-RSRP<-143	dBm
PRS_RSRP_14	-143≤PRS-RSRP<-142	dBm
PRS_RSRP_15	-142≤PRS-RSRP<-141	dBm
PRS_RSRP_16	-141≤PRS-RSRP<-140	dBm
PRS_RSRP_17	-140≤PRS-RSRP<-139	dBm
PRS_RSRP_18	-139≤PRS-RSRP<-138	dBm
…	…	…
PRS_RSRP_111	-46≤PRS-RSRP<-45	dBm
PRS_RSRP_112	-45≤PRS-RSRP<-44	dBm
PRS_RSRP_113	-44≤PRS-RSRP<-43	dBm
PRS_RSRP_114	-43≤PRS-RSRP<-42	dBm
PRS_RSRP_115	-42≤PRS-RSRP<-41	dBm
PRS_RSRP_116	-41≤PRS-RSRP<-40	dBm
PRS_RSRP_117	-40≤PRS-RSRP<-39	dBm
PRS_RSRP_118	-39≤PRS-RSRP<-38	dBm
PRS_RSRP_119	-38≤PRS-RSRP<-37	dBm
PRS_RSRP_120	-37≤PRS-RSRP<-36	dBm
PRS_RSRP_121	-36≤PRS-RSRP<-35	dBm
PRS_RSRP_122	-35≤PRS-RSRP<-34	dBm
PRS_RSRP_123	-34≤PRS-RSRP<-33	dBm
PRS_RSRP_124	-33≤PRS-RSRP<-32	dBm

PRS_RSRP_125	-32≤PRS-RSRP<-31	dBm
PRS_RSRP_126	-31≤PRS-RSRP	dBm

10.1.24.3.2 Differential Report Mapping for PRS-RSRP Measurement

The reporting range of differential PRS-RSRP is defined from -30 dB to 0 dB with 1 dB resolution when *nr-DL-AoD-RequestLocationInformation* message is received.

The mapping of measured quantity is defined in Table 10.1.24.3.2-1. The range in the signalling may be larger than the guaranteed accuracy range.

The reporting range of differential PRS-RSRP is defined from -30 dB to 30 dB with 1 dB resolution when *nr-DL-TDOA-RequestLocationInformation* or *nr-Multi-RTT-RequestLocationInformation* is received.

The mapping of measured quantity is defined in Table 10.1.24.3.2-2. The range in the signalling may be larger than the guaranteed accuracy range or the range supported by the UE receiver for differentail RSRP measured on different PRS resources in frequency domain at the same time.

Table 10.1.24.3.2-1: Measurement report mapping for differential PRS-RSRP

Reported value	Measured quantity value	Unit
DIFFRSRP_0	-30≥ΔRSRP	dB
DIFFRSRP_1	-29≥ΔRSRP>-30	dB
DIFFRSRP_2	-28≥ΔRSRP>-29	dB
DIFFRSRP_3	-27≥ΔRSRP>-28	dB
DIFFRSRP_4	-26≥ΔRSRP>-27	dB
DIFFRSRP_5	-25≥ΔRSRP>-26	dB
DIFFRSRP_6	-24≥ΔRSRP>-25	dB
DIFFRSRP_7	-23≥ΔRSRP>-24	dB
DIFFRSRP_8	-22≥ΔRSRP>-23	dB
DIFFRSRP_9	-21≥ΔRSRP>-22	dB
DIFFRSRP_10	-20≥ΔRSRP>-21	dB
DIFFRSRP_11	-19≥ΔRSRP>-20	dB
DIFFRSRP_12	-18≥ΔRSRP>-19	dB
DIFFRSRP_13	-17≥ΔRSRP>-18	dB
DIFFRSRP_14	-16≥ΔRSRP>-17	dB
DIFFRSRP_15	-15≥ΔRSRP>-16	dB
DIFFRSRP_16	-14≥ΔRSRP>-15	dB
DIFFRSRP_17	-13≥ΔRSRP>-14	dB
DIFFRSRP_18	-12≥ΔRSRP>-13	dB
DIFFRSRP_19	-11≥ΔRSRP>-12	dB
DIFFRSRP_20	-10≥ΔRSRP>-11	dB
DIFFRSRP_21	-9≥ΔRSRP>-10	dB
DIFFRSRP_22	-8≥ΔRSRP>-9	dB
DIFFRSRP_23	-7≥ΔRSRP>-8	dB
DIFFRSRP_24	-6≥ΔRSRP>-7	dB
DIFFRSRP_25	-5≥ΔRSRP>-6	dB
DIFFRSRP_26	-4≥ΔRSRP>-5	dB
DIFFRSRP_27	-3≥ΔRSRP>-4	dB
DIFFRSRP_28	-2≥ΔRSRP>-3	dB
DIFFRSRP_29	-1≥ΔRSRP>-2	dB
DIFFRSRP_30	0≥ΔRSRP>-1	dB

Table 10.1.24.3.2-2: Measurement report mapping for differential PRS-RSRP

Reported value	Measured quantity value	Unit
DIFFRSRP_0	-30≥ΔRSRP	dB
DIFFRSRP_1	-29≥ΔRSRP>-30	dB
DIFFRSRP_2	-28≥ΔRSRP>-29	dB
DIFFRSRP_3	-27≥ΔRSRP>-28	dB
DIFFRSRP_4	-26≥ΔRSRP>-27	dB
DIFFRSRP_5	-25≥ΔRSRP>-26	dB
DIFFRSRP_6	-24≥ΔRSRP>-25	dB

DIFFRSRP_7	-23≥ΔRSRP>-24	dB
DIFFRSRP_8	-22≥ΔRSRP>-23	dB
DIFFRSRP_9	-21≥ΔRSRP>-22	dB
DIFFRSRP_10	-20≥ΔRSRP>-21	dB
DIFFRSRP_11	-19≥ΔRSRP>-20	dB
DIFFRSRP_12	-18≥ΔRSRP>-19	dB
DIFFRSRP_13	-17≥ΔRSRP>-18	dB
DIFFRSRP_14	-16≥ΔRSRP>-17	dB
…	…	…
DIFFRSRP_25	-5≥ΔRSRP>-6	dB
DIFFRSRP_26	-4≥ΔRSRP>-5	dB
DIFFRSRP_27	-3≥ΔRSRP>-4	dB
DIFFRSRP_28	-2≥ΔRSRP>-3	dB
DIFFRSRP_29	-1≥ΔRSRP>-2	dB
DIFFRSRP_30	0≥ΔRSRP>-1	dB
DIFFRSRP_31	1≥ΔRSRP>0	dB
DIFFRSRP_32	2≥ΔRSRP>1	dB
DIFFRSRP_33	3≥ΔRSRP>2	dB
DIFFRSRP_34	4≥ΔRSRP>3	dB
DIFFRSRP_35	5≥ΔRSRP>4	dB
DIFFRSRP_36	6≥ΔRSRP>5	dB
…	…	…
DIFFRSRP_47	17≥ΔRSRP>16	dB
DIFFRSRP_48	18≥ΔRSRP>17	dB
DIFFRSRP_49	19≥ΔRSRP>18	dB
DIFFRSRP_50	20≥ΔRSRP>19	dB
DIFFRSRP_51	21≥ΔRSRP>20	dB
DIFFRSRP_52	22≥ΔRSRP>21	dB
DIFFRSRP_53	23≥ΔRSRP>-22	dB
DIFFRSRP_54	24≥ΔRSRP>23	dB
DIFFRSRP_55	25≥ΔRSRP>24	dB
DIFFRSRP_56	26≥ΔRSRP>25	dB
DIFFRSRP_57	27≥ΔRSRP>26	dB
DIFFRSRP_58	28≥ΔRSRP>27	dB
DIFFRSRP_59	29≥ΔRSRP>28	dB
DIFFRSRP_60	30≥ΔRSRP>29	dB
DIFFRSRP_61	ΔRSRP>30	dB

10.1.25 UE Rx-Tx Time Difference Measurements

10.1.25.1 Introduction

The requirements in Clause 10.1.25 shall apply, provided the UE has received *nr-Multi-RTT-RequestLocationInformation* message from LMF via LPP [31] requesting the UE to report one or more UE Rx-Tx time difference measurements defined in TS 38.215 [4]. The requirements in Clause 10.1.25 shall apply:

- when UE is in RRC_CONNECTED state and the measurement is performed with MG or without MG,
- when UE is in RRC_INACTIVE state.

10.1.25.2 Measurement Accuracy Requirements

The UE Rx-Tx time difference measurement accuracy requirements in this clause shall not apply, if:

N_{TA_offset} defined in Table 7.1.2-2 changes during the UE Rx-Tx measurement period or

if the uplink transmission timing changes during the UE Rx-Tx measurement period due to the network-configured Timing Advance.

The UE Rx-Tx time difference measurement accuracy requirements in this clause shall apply provided that:

- The UE transmits SRS within [-160, 160] msec of at least one DL PRS resource of each of the TRPs in the assistance data.

If the uplink transmission timing changes during the UE Rx-Tx measurement period due to the autonomous timing adjustment defined in clause 7.1.2 then:

- UE Rx-Tx measurement accuracy requirements shall apply for a cell, which is also the downlink reference cell (defined in section 7.1.1) for SRS transmission even if the uplink transmission timing changes during the UE Rx-Tx measurement period due to autonomous adjustment.

- UE Rx-Tx measurement accuracy requirements shall not apply for a cell, which is not the downlink reference cell (defined in section 7.1.1) for SRS transmission, if the uplink transmission timing changes during the UE Rx-Tx measurement period due to autonomous adjustment.

When a serving cell change occurs during the UE Rx-Tx measurement period, the UE Rx-Tx time difference measurement accuracy requirements in this clause shall apply provided that the serving cell change does not impact SRS configuration for the UE Rx-Tx measurement.

The relative accuracy of UE Rx-Tx measurement in this clause is defined as accuracy of the difference between two UE Rx-Tx measurements.

The accuracy requirements in Table 10.1.25.2-1 for FR1 are valid under the following conditions:

Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.

$PRP|_{dBm}$ according to Annex B.2.14 for a corresponding Band.

AWGN propagation condition.

Table 10.1.25.2-1: UE Rx-Tx time difference measurement accuracy in FR1 in AWGN

Accuracy	Conditions						
	PRS Ês/Iot	Minimum PRS bandwidth	PRS SCS	PRS resource repetition $(T_{rep}^{PRS} * L_{PRS} / K_{comb}^{PRS}$ Note 3	NR operating band groups Note 2	Io Note 4 range	
						Minimum Io Note 1	Maximum Io
Tc Note 5	dB	RB	kHz			dBm / SCS_{PRS}	dBm/BW
± 78+δ	-3	≥24	15	≥4	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-50
					NR_FDD_FR1_B	-120.5	
					NR_TDD_FR1_C	-120	
					NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	
					NR_FDD_FR1_E, NR_TDD_FR1_E	-119	
					NR_FDD_FR1_F	-118.5	
					NR_FDD_FR1_G	-118	
					NR_FDD_FR1_H	-117.5	
± 59+δ		≥52		≥1	Note 6	Note 6	Note 6
± 30+δ		>104		≥1	Note 6	Note 6	Note 6
± 57+δ		≥24	30	≥4	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-118	-50
					NR_FDD_FR1_B	-117.5	
					NR_TDD_FR1_C	-117	
					NR_FDD_FR1_D, NR_TDD_FR1_D	-116.5	
					NR_FDD_FR1_E, NR_TDD_FR1_E	-116	
					NR_FDD_FR1_F	-115.5	
					NR_FDD_FR1_G	-115	
					NR_FDD_FR1_H	-114.5	
± 30+δ		≥48		≥1	NOTE 6	NOTE 6	NOTE 6

± 15+δ		≥132		≥1	NOTE 6	NOTE 6	NOTE 6
± 29+δ		≥24	60	≥4	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-115	-50
					NR_FDD_FR1_B	-114.5	
					NR_TDD_FR1_C	-114	
					NR_FDD_FR1_D, NR_TDD_FR1_D	-113.5	
					NR_FDD_FR1_E, NR_TDD_FR1_E	-113	
					NR_FDD_FR1_F	-113.5	
					NR_FDD_FR1_G	-113	
					NR_FDD_FR1_H	-111.5	
± 15+δ		≥ 64		≥1	NOTE 6	NOTE 6	NOTE 6
± 7+δ		≥ 132		≥1	NOTE 6	NOTE 6	NOTE 6
± 101+δ	-13	≥24	15	≥4	NOTE 6	NOTE 6	NOTE 6
± 75+δ		≥52		≥1	NOTE 6	NOTE 6	NOTE 6
± 37+δ		>104		≥1	NOTE 6	NOTE 6	NOTE 6
± 58+δ		≥24	30	≥4	NOTE 6	NOTE 6	NOTE 6
± 39+δ		≥48		≥1	NOTE 6	NOTE 6	NOTE 6
± 16+δ		≥132		≥1	NOTE 6	NOTE 6	NOTE 6
± 36+δ		≥24	60	≥4	NOTE 6	NOTE 6	NOTE 6
± 16+δ		≥ 64		≥1	NOTE 6	NOTE 6	NOTE 6
± 8+δ		≥ 132		≥1	NOTE 6	NOTE 6	NOTE 6

NOTE 1: This minimum Io condition is expressed as the average Io per RE over all REs in an OFDM symbol.
NOTE 2: NR operating band groups are as defined in Section 3.5.
NOTE 3: $T_{\text{rep}}^{\text{PRS}}$, L_{PRS} , $K_{\text{comb}}^{\text{PRS}}$ are configured by higher layer parameter *dl-PRS-ResourceRepetitionFactor, dl-PRS-NumSymbols and dl-PRS-CombSize-N*defined in TS 37.355 [34].
NOTE 4: The Io is defined in PRS slots. The same Io range applies to PRS and non-PRS symbols. Io levels are different in PRS and non-PRS symbols within the same slot.
NOTE 5: Tc is the basic timing unit defined in TS 38.211 [6].
NOTE 6: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth of the smallest RB number for the corresponding SCS.
NOTE 7: δ is the margin determined from Table 10.1.25.2-5.

The accuracy requirements in Table 10.1.25.2-1a for FR1 are valid under the following conditions:

Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.

PRP|$_{\text{dBm}}$ according to Annex B.2.14 for a corresponding Band.

Number of measurement samples is less than 4

AWGN propagation condition.

Table 10.1.25.2-1a: UE Rx-Tx time difference measurement accuracy in FR1 in AWGN with reduced measurement samples

Accuracy	Conditions						
	PRS Ês/Iot	Minimum PRS bandwidth	PRS SCS	PRS resource repetition ($T_{\text{rep}}^{\text{PRS}} * L_{\text{PRS}}/K_{\text{comb}}^{\text{PRS}}$ Note 3	NR operating band groups Note 2	Io Note 4 range	
						Minimum Io Note 1	Maximum Io
Tc Note 5	dB	RB	kHz			dBm / SCS_{PRS}	dBm/BW
± [59+δ]	0	≥[52]	15	≥[1]	Note 6	Note 6	Note 6
± [30+δ6]		>[104]		≥[1]	Note 6	Note 6	Note 6
± [30+δ]		≥[48]	30	≥[1]	NOTE 6	NOTE 6	NOTE 6
± [15+δ]		≥[132]		≥[1]	NOTE 6	NOTE 6	NOTE 6
± [15+δ]		≥[64]	60	≥[1]	NOTE 6	NOTE 6	NOTE 6
± [7+δ]		≥[132]		≥[1]	NOTE 6	NOTE 6	NOTE 6
± [75+δ]	-6	≥[52]	15	≥[1]	NOTE 6	NOTE 6	NOTE 6
± [37+δ]		>[104]		≥[1]	NOTE 6	NOTE 6	NOTE 6

± [39+δ]		≥[48]	30	≥[1]	NOTE 6	NOTE 6	NOTE 6
± [16+δ]		≥[132]		≥[1]	NOTE 6	NOTE 6	NOTE 6
± [16+δ]		≥[64]	60	≥[1]	NOTE 6	NOTE 6	NOTE 6
± [8+δ]		≥[132]		≥[1]	NOTE 6	NOTE 6	NOTE 6

NOTE 1: This minimum Io condition is expressed as the average Io per RE over all REs in an OFDM symbol.
NOTE 2: NR operating band groups are as defined in Section 3.5.
NOTE 3: $T_{\mathrm{rep}}^{\mathrm{PRS}}$, L_{PRS}, $K_{\mathrm{comb}}^{\mathrm{PRS}}$ are configured by higher layer parameter *dl-PRS-ResourceRepetitionFactor, dl-PRS-NumSymbols and dl-PRS-CombSizeN*defined in TS 37.355 [34].
NOTE 4: The Io is defined in PRS slots. The same Io range applies to PRS and non-PRS symbols. Io levels are different in PRS and non-PRS symbols within the same slot.
NOTE 5: Tc is the basic timing unit defined in TS 38.211 [6].
NOTE 6: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth of the smallest RB number for the corresponding SCS.
NOTE 7: δ is the margin determined from Table 10.1.25.2-5.

The relative accuracy requirements in Table 10.1.25.2-1b for FR1 are valid under the following conditions:

Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.

$PRP|_{dBm}$ according to Annex B.2.14 for a corresponding Band.

AWGN propagation condition.

the two UE Rx-Tx time difference measurements are associated with the same RxTx TEG

Table 10.1.25.2-1b: UE Rx-Tx time difference relative measurement accuracy in FR1 in AWGN with TEG reporting

Accuracy	Conditions						
	PRS Ês/Iot	PRS SCS	PRS bandwidth Note 1	PRS resource repetition ($T_{rep}^{PRS} * L_{PRS} / K_{comb}^{PRS}$) Note 2	Io Note 3 range		
					NR operating band groups Note 4	Minimum Io	Maximum Io
Tc Note 5	dB	kHz	RB			dBm/SCS	dBm/BW$_{Channel}$
[132] + Δ Note 7	(PRS Ês/Iot)$_i$ ≥ -6dB	15	≥ [24]	≥ [4]	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-50
					NR_FDD_FR1_B	-120.5	-50
					NR_TDD_FR1_C	-120	-50
					NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-50
					NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-50
					NR_FDD_FR1_F	-118.5	-50
					NR_FDD_FR1_G	-118	-50
					NR_FDD_FR1_H	-117.5	-50
[98] + Δ			≥ [52]	≥ [1]	Note 6	Note 6	Note 6
[42] + Δ			≥ [104]	≥ [1]	Note 6	Note 6	Note 6
[75] + Δ	(PRS Ês/Iot)$_i$ ≥ -13dB	30	≥ [24]	≥ [4]	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-118	-50
					NR_FDD_FR1_B	-117.5	-50
					NR_TDD_FR1_C	-117	-50
					NR_FDD_FR1_D, NR_TDD_FR1_D	-116.5	-50
					NR_FDD_FR1_E, NR_TDD_FR1_E	-116	-50
					NR_FDD_FR1_F	-115.5	-50
					NR_FDD_FR1_G	-115	-50
					NR_FDD_FR1_H	-114.5	-50

[48] + Δ			≥ [48]	≥ [1]	Note 6	Note 6	Note 6
[24] + Δ			≥ [132]	≥ [1]	Note 6	Note 6	Note 6
[50] + Δ		60	≥ [24]	≥ [4]	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-115	-50
					NR_FDD_FR1_B	-114.5	-50
					NR_TDD_FR1_C	-114	-50
					NR_FDD_FR1_D, NR_TDD_FR1_D	-113.5	-50
					NR_FDD_FR1_E, NR_TDD_FR1_E	-113	-50
					NR_FDD_FR1_F	-113.5	-50
					NR_FDD_FR1_G	-113	-50
					NR_FDD_FR1_H	-111.5	-50
[24] + Δ			≥ [64]	≥ [1]	Note 6	Note 6	Note 6
[10] + Δ			≥ [132]	≥ [1]	Note 6	Note 6	Note 6

NOTE 1: Minimum PRS bandwidth, which is minimum of the PRS bandwidths of resource j and resource i.
NOTE 2: Minimum number of PRS resource repetitions among resource j and resource i. $T_{\text{rep}}^{\text{PRS}}$, L_{PRS}, $K_{\text{comb}}^{\text{PRS}}$ are configured by higher layer parameter *dl-PRS-ResourceRepetitionFactor, dl-PRS-NumSymbols and dl-PRS-CombSizeN*defined in TS 37.355 [34], respectively.
NOTE 3: Io is assumed to have constant EPRE across the bandwidth.
NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.
NOTE 5: Tc is the basic timing unit defined in TS 38.211 [6].
NOTE 6: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth of the smallest RB number for the corresponding SCS.
NOTE 7: Δis the value of the timing error margin for the RxTx TEG, reported via *nr-UE-RxTxTEG-TimingErrorMargin*. Δ cannot be larger than the sum of the margins in table 10.1.25.2-5 (dependent on PRS/SRS BW) for any pair of individual UE Rx-Tx time difference measurements associated with the RxTx TEG. .

The accuracy requirements in Table 10.1.25.2-2 for FR1 are valid under the following conditions:

Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.

$\text{PRP}|_{\text{dBm}}$ according to Annex B.2.14 for a corresponding Band.

Fading propagation condition.

Table 10.1.25.2-2: UE Rx-Tx time difference measurement accuracy in FR1 in fading

Accuracy	Conditions						
	PRS Ês/Iot	Minimum PRS bandwidth	PRS SCS	PRS resource repetition ($T_{\text{rep}}^{\text{PRS}} * L_{\text{PRS}}/K_{\text{comb}}^{\text{PRS}}$ Note 3	NR operating band groups Note 2	Io Note 4 range	
						Minimum Io Note 1	Maximum Io
Tc Note 5	dB	RB	kHz			dBm / SCS_{PRS}	dBm/BW
± 137+δ	-3	≥24	15	≥4	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-50
					NR_FDD_FR1_B	-120.5	
					NR_TDD_FR1_C	-120	
					NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	
					NR_FDD_FR1_E, NR_TDD_FR1_E	-119	
					NR_FDD_FR1_F	-118.5	
					NR_FDD_FR1_G	-118	
					NR_FDD_FR1_H	-117.5	
± 96+δ		≥52		≥1	NOTE 6	NOTE 6	NOTE 6
± 62+δ		>104		≥1	NOTE 6	NOTE 6	NOTE 6
± 87+δ		≥24	30	≥4	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-118	-50
					NR_FDD_FR1_B	-117.5	

					NR_TDD_FR1_C	-117	
					NR_FDD_FR1_D, NR_TDD_FR1_D	-116.5	
					NR_FDD_FR1_E, NR_TDD_FR1_E	-116	
					NR_FDD_FR1_F	-115.5	
					NR_FDD_FR1_G	-115	
					NR_FDD_FR1_H	-114.5	
± 68+δ		≥48		≥1	NOTE 6	NOTE 6	NOTE 6
± 44+δ		≥132		≥1	NOTE 6	NOTE 6	NOTE 6
± 59+δ		≥24	60	≥4	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-115	-50
					NR_FDD_FR1_B	-114.5	
					NR_TDD_FR1_C	-114	
					NR_FDD_FR1_D, NR_TDD_FR1_D	-113.5	
					NR_FDD_FR1_E, NR_TDD_FR1_E	-113	
					NR_FDD_FR1_F	-113.5	
					NR_FDD_FR1_G	-113	
					NR_FDD_FR1_H	-111.5	
± 42+δ		≥ 64		≥1	NOTE 6	NOTE 6	NOTE 6
± 36+δ		≥ 132		≥1	NOTE 6	NOTE 6	NOTE 6
± 180+δ	-13	≥24		≥4	NOTE 6	NOTE 6	NOTE 6
± 98+δ		≥52	15	≥1	NOTE 6	NOTE 6	NOTE 6
± 68+δ		>104		≥1	NOTE 6	NOTE 6	NOTE 6
± 87+δ		≥24	30	≥4	NOTE 6	NOTE 6	NOTE 6
± 85+δ		≥48		≥1	NOTE 6	NOTE 6	NOTE 6
± 44+δ		≥132		≥1	NOTE 6	NOTE 6	NOTE 6
± 139+δ		≥24	60	≥4	NOTE 6	NOTE 6	NOTE 6
± 46+δ		≥ 64		≥1	NOTE 6	NOTE 6	NOTE 6
± 30+δ		≥ 132		≥1	NOTE 6	NOTE 6	NOTE 6

NOTE 1: This minimum Io condition is expressed as the average Io per RE over all REs in an OFDM symbol.
NOTE 2: NR operating band groups are as defined in Section 3.5.
NOTE 3: $T_{\text{rep}}^{\text{PRS}}$, L_{PRS}, $K_{\text{comb}}^{\text{PRS}}$ are configured by higher layer parameter *dl-PRS-ResourceRepetitionFactor, dl-PRS-NumSymbols and dl-PRS-CombSizeN*defined in TS 37.355 [34].
NOTE 4: The Io is defined in PRS slots. The same Io range applies to PRS and non-PRS symbols. Io levels are different in PRS and non-PRS symbols within the same slot.
NOTE 5: Tc is the basic timing unit defined in TS 38.211 [6].
NOTE 6: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth of the smallest RB number for the corresponding SCS.
NOTE 7: δ is the margin determined from Table 10.1.25.2-5.

The accuracy requirements in Table 10.1.25.2-3 for FR2 are valid under the following conditions:

Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.

$PRP|_{dBm}$ according to Annex B.2.14 for a corresponding Band.

AWGN propagation condition.

Table 10.1.25.2-3: UE Rx-Tx time difference measurement accuracy in FR2 in AWGN

Accuracy	Conditions					
	PRS Ês/Iot	Minimum PRS bandwidth	PRS SCS	PRS resource repetition ($T_{\text{rep}}^{\text{PRS}} * L_{\text{PRS}} / K_{\text{comb}}^{\text{PRS}}$ Note 3	Io Note 4 range	
					Minimum Io Note 1	Maximum Io
Tc Note 5	dB	RB	kHz		dBm / SCS_{PRS}	$dBm/BW_{Channel}$

± 22+δ	-3	≥24	60	≥1	Same value as PRP in Table B.2.14-2, according to UE Power class, operating band and angle of arrival	-50
± 15+δ		≥64		≥1	NOTE 6	NOTE 6
± 7+δ		≥132		≥1	NOTE 6	NOTE 6
± 12+δ		≥32	120	≥1	Same value as PRP in Table B.2.14-2, according to UE Power class, operating band and angle of arrival	-50
± 7+δ		≥64		≥1	NOTE 6	NOTE 6
± 4+δ		≥128		≥1	NOTE 6	NOTE 6
± 35+δ	-13	≥24	60	≥1	NOTE 6	NOTE 6
± 15+δ		≥64		≥1	NOTE 6	NOTE 6
± 7+δ		≥132		≥1	NOTE 6	NOTE 6
± 14+δ		≥32	120	≥1	NOTE 6	NOTE 6
± 9+δ		≥64		≥1	NOTE 6	NOTE 6
± 4+δ		≥128		≥1	NOTE 6	NOTE 6

NOTE 1: This minimum Io condition is expressed as the average Io per RE over all REs in an OFDM symbol.
NOTE 2: NR operating band groups are as defined in Section 3.5.
NOTE 3: $T_{\text{rep}}^{\text{PRS}}$, L_{PRS} , $K_{\text{comb}}^{\text{PRS}}$ are configured by higher layer parameter *dl-PRS-ResourceRepetitionFactor, dl-PRS-NumSymbols and dl-PRS-CombSizeN*defined in TS 37.355 [34].
NOTE 4: The Io is defined in PRS slots. The same Io range applies to PRS and non-PRS symbols. Io levels are different in PRS and non-PRS symbols within the same slot.
NOTE 5: Tc is the basic timing unit defined in TS 38.211 [6].
NOTE 6: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth of the smallest RB number for the corresponding SCS.
NOTE 7: δ is the margin determined from Table 10.1.25.2-6.

The accuracy requirements in Table 10.1.25.2-3a for FR2 are valid under the following conditions:

Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.

PRP|$_{\text{dBm}}$ according to Annex B.2.14 for a corresponding Band

Number of measurement samples is less than 4

AWGN propagation condition.

Table 10.1.25.2-3a: UE Rx-Tx time difference measurement accuracy in FR2 in AWGN with reduced measurement samples

Accuracy	Conditions					
	PRS Ês/Iot	Minimum PRS bandwidth	PRS SCS	PRS resource repetition ($T_{\text{rep}}^{\text{PRS}} * L_{\text{PRS}} / K_{\text{comb}}^{\text{PRS}}$ Note 3	Io Note 4 range	
					Minimum Io Note 1	Maximum Io
Tc Note 5	dB	RB	kHz		dBm / SCS_{PRS}	dBm/$BW_{Channel}$
± [15+δ]	0	≥[64]	60	≥[1]	NOTE 6	NOTE 6
± [7+δ]		≥[132]		≥[1]	NOTE 6	NOTE 6
± [7+δ]		≥[64]	120	≥[1]	NOTE 6	NOTE 6
± [4+δ]		≥[128]		≥[1]	NOTE 6	NOTE 6
± [15+δ]	-6	≥[64]	60	≥[1]	NOTE 6	NOTE 6
± [7+δ]		≥[132]		≥[1]	NOTE 6	NOTE 6
± [9+δ]		≥[64]	120	≥[1]	NOTE 6	NOTE 6
± [4+δ]		≥[128]		≥[1]	NOTE 6	NOTE 6

NOTE 1: This minimum Io condition is expressed as the average Io per RE over all REs in an OFDM symbol.
NOTE 2: NR operating band groups are as defined in Section 3.5.
NOTE 3: $T_{\text{rep}}^{\text{PRS}}$, L_{PRS} , $K_{\text{comb}}^{\text{PRS}}$ are configured by higher layer parameter dl-PRS-ResourceRepetitionFactor, dl-PRS-NumSymbols and dl-PRS-CombSizeNdefined in TS 37.355 [34].
NOTE 4: The Io is defined in PRS slots. The same Io range applies to PRS and non-PRS symbols. Io levels are different in PRS and non-PRS symbols within the same slot.
NOTE 5: Tc is the basic timing unit defined in TS 38.211 [6].

NOTE 6: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth of the smallest RB number for the corresponding SCS.
NOTE 7: δ is the margin determined from Table 10.1.25.2-6.

The relative accuracy requirements in Table 10.1.25.2-3b for FR2 are valid under the following conditions:

Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.

$PRP|_{dBm}$ according to Annex B.2.14 for a corresponding Band

AWGN propagation condition.

the two UE Rx-Tx time difference measurements are associated with the same RxTx TEG

Table 10.1.25.2-3b: UE Rx-Tx time difference relative measurement accuracy in FR2 in AWGN with TEG reporting

Accuracy	Conditions					
	PRS Ês/Iot	PRS SCS	PRS bandwidth Note 1	PRS resource repetition ($T_{rep}^{PRS} * L_{PRS} / K_{comb}^{PRS}$) Note 2	Io Note 3 range	
					Minimum Io	Maximum Io
Tc Note 4	dB	kHz	RB		dBm/SCS	$dBm/BW_{Channel}$
[107] + Δ Note 6	(PRS Ês/Iot)$_i$ ≥ -6dB	60	≥ [24]	≥ [4]	Same value as PRS_RP in Table B.2.z-2, according to UE Power class, operating band and angle of arrival	-50
[56] + Δ			≥ [64]	≥ [1]	Note 5	Note 5
[27] + Δ			≥ [132]	≥ [1]	Note 5	Note 5
[56] + Δ	(PRS Ês/Iot)$_i$ ≥ -13dB	120	≥ [32]	≥ [4]	Same value as PRS_RP in Table B.2.z-2, according to UE Power class, operating band and angle of arrival	-50
[29] + Δ			≥ [64]	≥ [1]	Note 5	Note 5
[18] + Δ			≥ [128]	≥ [1]	Note 5	Note 5

NOTE 1: Minimum PRS bandwidth, which is minimum of the PRS bandwidths of resource j and resource i.
NOTE 2: Minimum number of PRS resource repetitions among resource j and resource i. $T_{\mathrm{rep}}^{\mathrm{PRS}}$, L_{PRS}, $K_{\mathrm{comb}}^{\mathrm{PRS}}$ are configured by higher layer parameter *dl-PRS-ResourceRepetitionFactor, dl-PRS-NumSymbols and dl-PRS-CombSizeN*defined in TS 37.355 [34], respectively.
NOTE 3: Io is assumed to have constant EPRE across the bandwidth.
NOTE 4: Tc is the basic timing unit defined in TS 38.211 [6].
NOTE 5: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth of the smallest RB number for the corresponding SCS.
NOTE 6: Δis the value of the timing error margin for the RxTx TEG, reported via *nr-UE-RxTxTEG-TimingErrorMargin*. Δ cannot be larger than the sum of the margins in table 10.1.25.2-6 (dependent on PRS/SRS BW) for any pair of individual UE Rx-Tx time difference measurements associated with the RxTx TEG.

The accuracy requirements in Table 10.1.25.2-4 for FR2 are valid under the following conditions:

Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.

$PRP|_{dBm}$ according to Annex B.2.14 for a corresponding Band.

Fading propagation condition.

Table 10.1.25.2-4: UE Rx-Tx time difference measurement accuracy in FR2 in fading

Accuracy	Conditions					
	PRS Ês/Iot	Minimum PRS bandwidth	PRS SCS	PRS resource repetition ($T_{rep}^{PRS} * L_{PRS} / K_{comb}^{PRS}$ Note 3	Io Note 4 range	
					Minimum Io Note 1	Maximum Io

Tc[Note 5]	dB	RB	kHz		dBm / SCS$_{PRS}$	dBm/BW$_{Channel}$
± 75+δ	-3	≥24	60	≥4	Same value as PRP in Table B.2.14-2, according to UE Power class, operating band and angle of arrival	-50
± 72+δ		≥64		≥1	NOTE 6	NOTE 6
± 57+δ		≥132		≥1	NOTE 6	NOTE 6
± 61+δ		≥32	120	≥1	Same value as PRP in Table B.2.14-2, according to UE Power class, operating band and angle of arrival	-50
± 64+δ		≥64		≥1	NOTE 6	NOTE 6
± 55+δ		≥128		≥1	NOTE 6	NOTE 6
± 92+δ	-13	≥24	60	≥4	NOTE 6	NOTE 6
± 70+δ		≥64		≥1	NOTE 6	NOTE 6
± 57+δ		≥132		≥1	NOTE 6	NOTE 6
± 60+δ		≥32	120	≥1	NOTE 6	NOTE 6
± 66+δ		≥64		≥1	NOTE 6	NOTE 6
± 62+δ		≥128		≥1	NOTE 6	NOTE 6

NOTE 1: This minimum Io condition is expressed as the average Io per RE over all REs in an OFDM symbol.
NOTE 2: NR operating band groups are as defined in Section 3.5.
NOTE 3: $T_{\mathrm{rep}}^{\mathrm{PRS}}$, L_{PRS} , $K_{\mathrm{comb}}^{\mathrm{PRS}}$ are configured by higher layer parameter *dl-PRS-ResourceRepetitionFactor, dl-PRS-NumSymbols and dl-PRS-CombSizeN*defined in TS 37.355 [34].
NOTE 4: The Io is defined in PRS slots. The same Io range applies to PRS and non-PRS symbols. Io levels are different in PRS and non-PRS symbols within the same slot.
NOTE 5: Tc is the basic timing unit defined in TS 38.211 [6].
NOTE 6: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth of the smallest RB number for the corresponding SCS.
NOTE 7: δ is the margin determined from Table 10.1.25.2-6.

Table 10.1.25.2-5: Margin for UE Rx-Tx time difference measurement accuracy in FR1

Min(PRS BW, SRS BW) (RB)			Margin (Tc [Note 1])
SCS = 15 kHz	SCS = 30 kHz	SCS = 60 kHz	
≥ 24	N/A	N/A	160
≥ 52	≥ 24	N/A	80
≥ 104	≥ 48	≥ 24	56
N/A	≥ 132	≥ 64	24
N/A	N/A	≥ 132	24

NOTE 1: Tc is the basic timing unit defined in TS 38.211 [6].
NOTE 2: If SRS and PRS have different SCS, the margin corresponding to the smallest RS BW in MHz applies.

Table 10.1.25.2-6: Margin for UE Rx-Tx time difference measurement accuracy in FR2

Min(PRS BW, SRS BW) (MHz)		Margin (Tc [Note 1])
SCS = 60 kHz	SCS = 120 kHz	
≥ 24	N/A	76
≥ 64	≥ 32	32
≥ 132	≥ 64	24
N/A	≥ 128	20

NOTE 1: Tc is the basic timing unit defined in TS 38.211 [6].
NOTE 2: If SRS and PRS have different SCS, the margin corresponding to the smallest RS BW in MHz applies.

10.1.25.3 Report mapping

Absolute UE Rx-Tx measurement reporting in clause 10.1.25.3.1, differential reporting for UE Rx-Tx measurement in clause 10.1.25.3.2, and additional path report mapping for UE Rx-Tx measurement in clause 10.1.25.3.3 applies, regardless of number of samples used to measure PRS, to report:

- TEG based measurement corresponding to UE reported Rx TEG in *nr-UE-Rx-TEG-ID-r17* [34],
- gap-based UE Rx-Tx measurement,
- gapless UE Rx-Tx measurement,
- UE Rx-Tx in RRC_INACTIVE state.

10.1.25.3.1 Absolute UE Rx-Tx Measurement Report Mapping

The reporting range for the absolute UE Rx-Tx time difference measurement ($T_{UE\ Rx\text{-}Tx}$) is defined from -985024×T_c to 985024×T_c with the resolution step of 2^k×T_c, where:

T_c is defined in TS 38.211 [6],

$k_{min} \leq k \leq k_{max}$,

k_{min}=[2] and k_{max}=5, when at least one of the PRS and the SRS resources configured for $T_{UE\ Rx\text{-}Tx}$ is in FR1,

k_{min}=0 and k_{max}=5, when both PRS and SRS resources configured for $T_{UE\ Rx\text{-}Tx}$ are in FR2,

$k \geq$ *timingReportingGranularityFactor* [34] configured by LMF via LPP for the UE Rx-Tx time difference measurement.

The $T_{UE\ Rx\text{-}Tx}$ report mapping for k = 0, 1, 2, 3, 4, and 5 are specified in Tables 10.1.25.3.1-1, 10.1.25.3.1-2, 10.1.25.3.1-3, 10.1.25.3.1-4, 10.1.25.3.1-5, and 10.1.25.3.1-6, respectively.

Table 10.1.25.3.1-1: Absolute UE Rx-Tx time difference measurement report mapping for *k*=0

Reported Quantity Value	Measured Quantity Value	Unit
RX-TX_TIME_DIFFERENCE_0000	$T_{UE\ Rx\text{-}Tx} < -985024$	T_c
RX-TX_TIME_DIFFERENCE_0001	$-985024 \leq T_{UE\ Rx\text{-}Tx} < -985023$	T_c
RX-TX_TIME_DIFFERENCE_0002	$-985023 \leq T_{UE\ Rx\text{-}Tx} < -985022$	T_c
…	…	…
RX-TX_TIME_DIFFERENCE_985024	$-1 \leq T_{UE\ Rx\text{-}Tx} < 0$	T_c
RX-TX_TIME_DIFFERENCE_985025	$0 \leq T_{UE\ Rx\text{-}Tx} < 1$	T_c
…	…	…
RX-TX_TIME_DIFFERENCE_1970047	$985022 \leq T_{UE\ Rx\text{-}Tx} < 985023$	T_c
RX-TX_TIME_DIFFERENCE_1970048	$985023 \leq T_{UE\ Rx\text{-}Tx} < 985024$	T_c
RX-TX_TIME_DIFFERENCE_1970049	$985024 \leq T_{UE\ Rx\text{-}Tx}$	T_c

Table 10.1.25.3.1-2: Absolute UE Rx-Tx time difference measurement report mapping for *k*=1

Reported Quantity Value	Measured Quantity Value	Unit
RX-TX_TIME_DIFFERENCE_0000	$T_{UE\ Rx\text{-}Tx} < -985024$	T_c
RX-TX_TIME_DIFFERENCE_0001	$-985024 \leq T_{UE\ Rx\text{-}Tx} < -985022$	T_c
RX-TX_TIME_DIFFERENCE_0002	$-985022 \leq T_{UE\ Rx\text{-}Tx} < -985020$	T_c
…	…	…
RX-TX_TIME_DIFFERENCE_492512	$-2 \leq T_{UE\ Rx\text{-}Tx} < 0$	T_c
RX-TX_TIME_DIFFERENCE_492513	$0 \leq T_{UE\ Rx\text{-}Tx} < 2$	T_c
…	…	…
RX-TX_TIME_DIFFERENCE_985023	$985020 \leq T_{UE\ Rx\text{-}Tx} < 985022$	T_c
RX-TX_TIME_DIFFERENCE_985024	$985022 \leq T_{UE\ Rx\text{-}Tx} < 985024$	T_c
RX-TX_TIME_DIFFERENCE_985025	$985024 \leq T_{UE\ Rx\text{-}Tx}$	T_c

Table 10.1.25.3.1-3: Absolute UE Rx-Tx time difference measurement report mapping for *k*=2

Reported Quantity Value	Measured Quantity Value	Unit
RX-TX_TIME_DIFFERENCE_0000	$T_{UE\ Rx\text{-}Tx} < -985024$	T_c
RX-TX_TIME_DIFFERENCE_0001	$-985024 \leq T_{UE\ Rx\text{-}Tx} < -985020$	T_c
RX-TX_TIME_DIFFERENCE_0002	$-985020 \leq T_{UE\ Rx\text{-}Tx} < -985016$	T_c

…	…	…
RX-TX_TIME_DIFFERENCE_246256	$-4 \le T_{UE\ Rx-Tx} < 0$	T_c
RX-TX_TIME_DIFFERENCE_246257	$0 \le T_{UE\ Rx-Tx} < 4$	T_c
…	…	…
RX-TX_TIME_DIFFERENCE_492511	$985016 \le T_{UE\ Rx-Tx} < 985020$	T_c
RX-TX_TIME_DIFFERENCE_492512	$985020 \le T_{UE\ Rx-Tx} < 985024$	T_c
RX-TX_TIME_DIFFERENCE_492513	$985024 \le T_{UE\ Rx-Tx}$	T_c

Table 10.1.25.3.1-4: Absolute UE Rx-Tx time difference measurement report mapping for *k*=3

Reported Quantity Value	Measured Quantity Value	Unit
RX-TX_TIME_DIFFERENCE_0000	$T_{UE\ Rx-Tx} < -985024$	T_c
RX-TX_TIME_DIFFERENCE_0001	$-985024 \le T_{UE\ Rx-Tx} < -985016$	T_c
RX-TX_TIME_DIFFERENCE_0002	$-985016 \le T_{UE\ Rx-Tx} < -985008$	T_c
…	…	…
RX-TX_TIME_DIFFERENCE_123128	$-8 \le T_{UE\ Rx-Tx} < 0$	T_c
RX-TX_TIME_DIFFERENCE_123129	$0 \le T_{UE\ Rx-Tx} < 8$	T_c
…	…	…
RX-TX_TIME_DIFFERENCE_246255	$985008 \le T_{UE\ Rx-Tx} < 985016$	T_c
RX-TX_TIME_DIFFERENCE_246256	$985016 \le T_{UE\ Rx-Tx} < 985024$	T_c
RX-TX_TIME_DIFFERENCE_246257	$985024 \le T_{UE\ Rx-Tx}$	T_c

Table 10.1.25.3.1-5: Absolute UE Rx-Tx time difference measurement report mapping for *k*=4

Reported Quantity Value	Measured Quantity Value	Unit
RX-TX_TIME_DIFFERENCE_0000	$T_{UE\ Rx-Tx} < -985024$	T_c
RX-TX_TIME_DIFFERENCE_0001	$-985024 \le T_{UE\ Rx-Tx} < -985008$	T_c
RX-TX_TIME_DIFFERENCE_0002	$-985008 \le T_{UE\ Rx-Tx} < -984992$	T_c
…	…	…
RX-TX_TIME_DIFFERENCE_61564	$-16 \le T_{UE\ Rx-Tx} < 0$	T_c
RX-TX_TIME_DIFFERENCE_61565	$0 \le T_{UE\ Rx-Tx} < 16$	T_c
…	…	…
RX-TX_TIME_DIFFERENCE_123127	$984992 \le T_{UE\ Rx-Tx} < 985008$	T_c
RX-TX_TIME_DIFFERENCE_123128	$985008 \le T_{UE\ Rx-Tx} < 985024$	T_c
RX-TX_TIME_DIFFERENCE_123129	$985024 \le T_{UE\ Rx-Tx}$	T_c

Table 10.1.25.3.1-6: Absolute UE Rx-Tx time difference measurement report mapping for *k*=5

Reported Quantity Value	Measured Quantity Value	Unit
RX-TX_TIME_DIFFERENCE_0000	$T_{UE\ Rx-Tx} < -985024$	T_c
RX-TX_TIME_DIFFERENCE_0001	$-985024 \le T_{UE\ Rx-Tx} < -984992$	T_c
RX-TX_TIME_DIFFERENCE_0002	$-984992 \le T_{UE\ Rx-Tx} < -984960$	T_c
…	…	…
RX-TX_TIME_DIFFERENCE_30782	$-32 \le T_{UE\ Rx-Tx} < 0$	T_c
RX-TX_TIME_DIFFERENCE_30783	$0 \le T_{UE\ Rx-Tx} < 32$	T_c
…	…	…
RX-TX_TIME_DIFFERENCE_61563	$984960 \le T_{UE\ Rx-Tx} < 984992$	T_c
RX-TX_TIME_DIFFERENCE_61564	$984992 \le T_{UE\ Rx-Tx} < 985024$	T_c
RX-TX_TIME_DIFFERENCE_61565	$985024 \le T_{UE\ Rx-Tx}$	T_c

10.1.25.3.2 Differential UE Rx-Tx Measurement Report Mapping

The reporting range for differential UE Rx-Tx time difference measurement ($\Delta T_{UE\ Rx-Tx}$) is defined from 0 up to $8191 \times T_c$ where:

$\Delta T_{UE\ Rx-Tx} = T_{UE\ Rx-Tx1} - T_{UE\ Rx-Tx2;}$ where:

$T_{UE\ Rx\text{-}Tx1} > T_{UE\ Rx\text{-}Tx2}$,

$T_{UE\ Rx\text{-}Tx1}$ is the first absolute UE Rx-Tx time difference measurement,

$T_{UE\ Rx\text{-}Tx1}$ is the second absolute UE Rx-Tx time difference measurement,

T_c is defined in TS 38.211 [6],

$k_{min} \leq k \leq k_{max}$,

k_{min}=[2] and k_{max}=5, when at least one of the PRS and the SRS resources configured for $\Delta T_{UE\ Rx\text{-}Tx}$ is in FR1,

k_{min}=0 and k_{max}=5, when all the PRS and SRS resources configured for $\Delta T_{UE\ Rx\text{-}Tx}$ are in FR2,

$k \geq$ *timingReportingGranularityFactor* [34] configured by LMF via LPP for the UE Rx-Tx time difference measurement.

The $\Delta T_{UE\ Rx\text{-}Tx}$ report mapping for k = 0, 1, 2, 3, 4, and 5 are specified in Tables 10.1.25.3.2-1, 10.1.25.3.2-2, 10.1.25.3.2-3, 10.1.25.3.2-4, 10.1.25.3.2-5, and 10.1.25.3.2-6, respectively.

Table 10.1.25.3.2-1: Differential UE Rx-Tx time difference measurement report mapping for *k*=0

Reported Quantity Value	Measured Quantity Value	Unit
DIFF_RX-TX_TIME_DIFFERENCE_0000	$0 \leq \Delta T_{UE\ Rx\text{-}Tx} < 1$	T_c
DIFF_RX-TX_TIME_DIFFERENCE_0001	$1 \leq \Delta T_{UE\ Rx\text{-}Tx} < 2$	T_c
DIFF_RX-TX_TIME_DIFFERENCE_0002	$2 \leq \Delta T_{UE\ Rx\text{-}Tx} < 3$	T_c
…	…	…
DIFF_RX-TX_TIME_DIFFERENCE_8189	$8189 \leq \Delta T_{UE\ Rx\text{-}Tx} < 8190$	T_c
DIFF_RX-TX_TIME_DIFFERENCE_8190	$8190 \leq \Delta T_{UE\ Rx\text{-}Tx} < 8191$	T_c
DIFF_RX-TX_TIME_DIFFERENCE_8191	$8191 \leq \Delta T_{UE\ Rx\text{-}Tx}$	T_c

Table 10.1.25.3.2-2: Differential UE Rx-Tx time difference measurement report mapping for *k*=1

Reported Quantity Value	Measured Quantity Value	Unit
DIFF_RX-TX_TIME_DIFFERENCE_0000	$0 \leq \Delta T_{UE\ Rx\text{-}Tx} < 2$	T_c
DIFF_RX-TX_TIME_DIFFERENCE_0001	$2 \leq \Delta T_{UE\ Rx\text{-}Tx} < 4$	T_c
DIFF_RX-TX_TIME_DIFFERENCE_0002	$4 \leq \Delta T_{UE\ Rx\text{-}Tx} < 6$	T_c
…	…	…
DIFF_RX-TX_TIME_DIFFERENCE_4093	$8186 \leq \Delta T_{UE\ Rx\text{-}Tx} < 8188$	T_c
DIFF_RX-TX_TIME_DIFFERENCE_4094	$8188 \leq \Delta T_{UE\ Rx\text{-}Tx} < 8190$	T_c
DIFF_RX-TX_TIME_DIFFERENCE_4095	$8190 \leq \Delta T_{UE\ Rx\text{-}Tx}$	T_c

Table 10.1.25.3.2-3: Differential UE Rx-Tx time difference measurement report mapping for *k*=2

Reported Quantity Value	Measured Quantity Value	Unit
DIFF_RX-TX_TIME_DIFFERENCE_0000	$0 \leq \Delta T_{UE\ Rx\text{-}Tx} < 4$	T_c
DIFF_RX-TX_TIME_DIFFERENCE_0001	$4 \leq \Delta T_{UE\ Rx\text{-}Tx} < 8$	T_c
DIFF_RX-TX_TIME_DIFFERENCE_0002	$8 \leq \Delta T_{UE\ Rx\text{-}Tx} < 12$	T_c
…	…	…
DIFF_RX-TX_TIME_DIFFERENCE_2045	$8180 \leq \Delta T_{UE\ Rx\text{-}Tx} < 8184$	T_c
DIFF_RX-TX_TIME_DIFFERENCE_2046	$8184 \leq \Delta T_{UE\ Rx\text{-}Tx} < 8188$	T_c
DIFF_RX-TX_TIME_DIFFERENCE_2047	$8188 \leq \Delta T_{UE\ Rx\text{-}Tx}$	T_c

Table 10.1.25.3.2-4: Differential UE Rx-Tx time difference measurement report mapping for *k*=3

Reported Quantity Value	Measured Quantity Value	Unit
DIFF_RX-TX_TIME_DIFFERENCE_0000	$0 \leq \Delta T_{UE\ Rx\text{-}Tx} < 8$	T_c
DIFF_RX-TX_TIME_DIFFERENCE_0001	$8 \leq \Delta T_{UE\ Rx\text{-}Tx} < 16$	T_c
DIFF_RX-TX_TIME_DIFFERENCE_0002	$16 \leq \Delta T_{UE\ Rx\text{-}Tx} < 24$	T_c
…	…	…
DIFF_RX-TX_TIME_DIFFERENCE_1021	$8168 \leq \Delta T_{UE\ Rx\text{-}Tx} < 8176$	T_c

DIFF_RX-TX_TIME_DIFFERENCE_1022	$8176 \le \Delta T_{UE\ Rx\text{-}Tx} < 8184$	T_c
DIFF_RX-TX_TIME_DIFFERENCE_1023	$8184 \le \Delta T_{UE\ Rx\text{-}Tx}$	T_c

Table 10.1.25.3.2-5: Differential UE Rx-Tx time difference measurement report mapping for *k*=4

Reported Quantity Value	Measured Quantity Value	Unit
DIFF_RX-TX_TIME_DIFFERENCE_0000	$0 \le \Delta T_{UE\ Rx\text{-}Tx} < 16$	T_c
DIFF_RX-TX_TIME_DIFFERENCE_0001	$16 \le \Delta T_{UE\ Rx\text{-}Tx} < 32$	T_c
DIFF_RX-TX_TIME_DIFFERENCE_0002	$32 \le \Delta T_{UE\ Rx\text{-}Tx} < 48$	T_c
…	…	…
DIFF_RX-TX_TIME_DIFFERENCE_509	$8144 \le \Delta T_{UE\ Rx\text{-}Tx} < 8160$	T_c
DIFF_RX-TX_TIME_DIFFERENCE_510	$8160 \le \Delta T_{UE\ Rx\text{-}Tx} < 8176$	T_c
DIFF_RX-TX_TIME_DIFFERENCE_511	$8176 \le \Delta T_{UE\ Rx\text{-}Tx}$	T_c

Table 10.1.25.3.2-6: Differential UE Rx-Tx time difference measurement report mapping for *k*=5

Reported Quantity Value	Measured Quantity Value	Unit
DIFF_RX-TX_TIME_DIFFERENCE_0000	$0 \le \Delta T_{UE\ Rx\text{-}Tx} < 32$	T_c
DIFF_RX-TX_TIME_DIFFERENCE_0001	$32 \le \Delta T_{UE\ Rx\text{-}Tx} < 64$	T_c
DIFF_RX-TX_TIME_DIFFERENCE_0002	$64 \le \Delta T_{UE\ Rx\text{-}Tx} < 96$	T_c
…	…	…
DIFF_RX-TX_TIME_DIFFERENCE_253	$8096 \le \Delta T_{UE\ Rx\text{-}Tx} < 8128$	T_c
DIFF_RX-TX_TIME_DIFFERENCE_254	$8128 \le \Delta T_{UE\ Rx\text{-}Tx} < 8160$	T_c
DIFF_RX-TX_TIME_DIFFERENCE_255	$8160 \le \Delta T_{UE\ Rx\text{-}Tx}$	T_c

10.1.25.3.3 Additional Path Report Mapping for UE Rx-Tx Time Difference

The reporting range for the additional path reporting for an UE Rx-Tx time difference measurement is defined up to the range from $-8175 \times T_c$ to $8175 \times T_c$ with the resolution step of $2^k \times T_c$, where

T_c is defined in TS 38.211 [6],

$k_{min} \le k \le k_{max}$,

k_{min}=[2] and k_{max}=5, when at least one of the PRS resource and SRS resource configured for the UE Rx-Tx time difference measurement is in FR1,

k_{min}=0 and k_{max}=5, when both of the PRS resource and SRS resource configured for the UE Rx-Tx time difference measurement is in FR2,

$k \ge$ *timingReportingGranularityFactor* [34] configured by LMF via LPP for the UE Rx-Tx time difference measurement.

The UE can report the timing of up to two additional paths with respect to the path timing determining the UE Rx-Tx time difference measurement.

The UE capable of *additionalPathsExtSupport-r17* can report the timing of up to its supported number of additional paths with respect to the path timing determining the UE Rx-Tx measurement.

The report mappings for different *k* values are specified in Tables 10.1.25.3.3-1 – 10.1.25.3.3-6.

Table 10.1.25.3.3-1: Report mapping for *k*=0

Reported Quantity Value, path_i	Measured Quantity Value, Δpath	Unit
path_00000	Δpath < -8175	T_c
path_00001	-8175 ≤ Δpath < -8174	T_c
path_00002	-8174 ≤ Δpath < -8173	T_c
…	…	…
path_08175	-1 ≤ Δpath < 0	T_c

path_08176	0 ≤ Δpath < 1	T_c
…	…	…
path_ 16349	8173 ≤ Δpath < 8174	T_c
path_ 16350	8174 ≤ Δpath < 8175	T_c
path_ 16351	8175 ≤ Δpath	T_c

Table 10.1.25.3.3-2: Report mapping for *k*=1

Reported Quantity Value, path_i	Measured Quantity Value, Δpath	Unit
path_0000	Δpath < -8175	T_c
path_0001	-8175 ≤ Δpath < -8173	T_c
path_0002	-8173 ≤ Δpath < -8171	T_c
…	…	…
path_4088	-1 ≤ Δpath < 1	T_c
…	…	…
path_8174	8171 ≤ Δpath < 8173	T_c
path_8175	8173 ≤ Δpath < 8175	T_c
path_8176	8175 ≤ Δpath	T_c

Table 10.1.25.3.3-3: Report mapping for *k*=2

Reported Quantity Value, path_i	Measured Quantity Value, Δpath	Unit
path_0000	Δpath < -8174	T_c
path_0001	-8174 ≤ Δpath < -8170	T_c
path_0002	-8170 ≤ Δpath < -8166	T_c
…	…	…
path_2044	-2 ≤ Δpath < 2	T_c
…	…	…
path_4086	8166 ≤ Δpath < 8170	T_c
path_4087	8170 ≤ Δpath < 8174	T_c
path_4088	8174 ≤ Δpath	T_c

Table 10.1.25.3.3-4: Report mapping for *k*=3

Reported Quantity Value, path_i	Measured Quantity Value, Δpath	Unit
path_0000	Δpath < -8172	T_c
path_0001	-8172 ≤ Δpath < -8164	T_c
path_0002	-8164 ≤ Δpath < -8156	T_c
…	…	…
path_1022	-4 ≤ Δpath < 4	T_c
…	…	…
path_2042	8156 ≤ Δpath < 8164	T_c
path_2043	8164 ≤ Δpath < 8172	T_c
path_2044	8172 ≤ Δpath	T_c

Table 10.1.25.3.3-5: Report mapping for *k*=4

Reported Quantity Value, path_i	Measured Quantity Value, Δpath	Unit
path_0000	Δpath < -8168	T_c
path_0001	-8168 ≤ Δpath < -8152	T_c
path_0002	-8152 ≤ Δpath < -8136	T_c
…	…	…
path_511	-8 ≤ Δpath < 8	T_c
…	…	…
path_1020	8136 ≤ Δpath < 8152	T_c

path_1021	8152 ≤ Δpath < 8168	T_c
path_1022	8168 ≤ Δpath	T_c

Table 10.1.25.3.3-6: Report mapping for *k*=5

Reported Quantity Value, path_i	Measured Quantity Value, Δpath	Unit
path_000	Δpath < -8160	T_c
path_001	-8160 ≤ Δpath < -8128	T_c
path_002	-8128 ≤ Δpath < -8096	T_c
…	…	…
path_256	0 ≤ Δpath < 32	T_c
…	…	…
path_509	8096 ≤ Δpath < 8128	T_c
path_510	8128 ≤ Δpath < 8160	T_c
path_511	8160 ≤ Δpath	T_c

10.1.26 FR2 P-MPR report

The FR2 P-MPR report mapping is defined by this clause.

10.1.26.1 Report mapping

Table 10.1.26.1-1 defines the FR2 P-MPR report mapping.

Table 10.1.26.1-1 Mapping of FR2 P-MPR

Reported value	Measured quantity value	Unit
P-MPR_00	3 ≤ PMP-R < 6	dB
P-MPR_01	6 ≤ PMP-R < 9	dB
P-MPR_02	9 ≤ PMP-R < 12	dB
P-MPR_03	PMP-R ≥ 12	dB

10.1.27 L1-SINR accuracy requirements for FR1

10.1.27.1 L1-SINR accuracy requirements with CSI-RS based CMR and no dedicated IMR configured

10.1.27.1.1 Absolute Accuracy

Unless otherwise specified, the requirements for absolute accuracy of CSI-RS based L1-SINR in this clause apply to all CSI-RS resources configured as CMR and no dedicated resource configured as IMR of the serving cell configured for L1-SINR measurement.

The accuracy requirements in Table 10.1.27.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for L1-SINR measurements are fulfilled according to Annex B.2.8.1 for a corresponding Band for each relevant CSI-RS based CMR.
- The bandwidth of CSI-RS as CMR is 48 PRBs and the density is 3.
- AWGN radio propagation conditions.

The performance with larger bandwidth of CSI-RS as CMR is equal to or better than the accuracy requirements in Table 10.1.27.1.1-1.

Table 10.1.27.1.1-1: L1-SINR absolute accuracy for CSI-RS based CMR only in FR1

Accuracy		Conditions						
Normal condition	Extreme condition	CSI-RS CMR Ês/Iot	Io Note 1 range					
			NR operating band groups Note 2	Minimum Io				Maximum Io
dB	dB	dB		dBm / SCS_{CSI-RS}			dBm/BW Channel	$dBm/BW_{Channel}$
				SCS_{CSI-RS} = 15 kHz	SCS_{CSI-RS} = 30 kHz	SCS_{CSI-RS} = 60 kHz		
±5.5	±6.5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	-114	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	-112	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-50

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2.
NOTE 3: The requirements apply for CSI-RS CMR Ês/Iot ≤ [6] dB with SCS 15kHz or 30kHz under NR high speed scenarios.

10.1.27.1.2 Relative Accuracy

The relative accuracy of CSI-RS based L1-SINR is defined as the L1-SINR measured from one CSI-RS compared to the largest measured value of L1-SINR among all CSI-RS resources of the serving cell.

The accuracy requirements in Table 10.1.27.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for L1-SINR measurements are fulfilled according to Annex B.2.8.1 for a corresponding Band for each relevant CSI-RS based CMR.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
- AWGN radio propagation conditions.

The performance with larger bandwidth of CSI-RS as CMR is equal to or better than the accuracy requirements in Table 10.1.27.1.2-1.

Table 10.1.27.1.2-1: L1-SINR relative accuracy for CSI-RS based CMR only in FR1

Accuracy		Conditions				
Normal condition	Extreme condition	CSI-RS CMR Ês/Iot Note 2	Io Note 1 range			
			NR operating band groups Note 3	Minimum Io		Maximum Io
dB	dB	dB		dBm / SCS_{CSI-RS}	dBm/BW Channel	$dBm/BW_{Channel}$

				SCS_{CSI-RS} = 15 kHz	**SCS_{CSI-RS} = 30 kHz**	**SCS_{CSI-RS} = 60 kHz**		
±[4.5]	±[5.5]	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	-114	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	-112	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-50

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The parameter CSI-RS CMR Ês/Iot is the minimum CMR CMR Ês/Iot of the pair of CSI-RS resources to which the requirement applies.
NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2.
NOTE 4: The requirements apply for CSI-RS CMR Ês/Iot ≤ [6] dB with SCS 15kHz or 30kHz under NR high speed scenarios.

10.1.27.2 L1-SINR accuracy requirements with SSB based CMR and dedicated IMR configured

10.1.27.2.1 Absolute Accuracy

Unless otherwise specified, the requirements for absolute accuracy of SSB based L1-SINR in this clause apply to all SSBs configured as CMR and dedicated resources configured as IMR of the serving cell configured for L1-SINR measurement.

The accuracy requirements are defined in Table 10.1.27.2.1-1 for SSB based CMR and NZP-IMR and in Table 10.1.27.2.1-2 for SSB based CMR and ZP-IMR.

The accuracy requirements in Tables 10.1.27.2.1-1 and 10.1.27.2.1-2 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for L1-SINR measurements are fulfilled according to Annex B.2.8.2 for a corresponding Band for each relevant SSB based CMR and IMR.
- The bandwidth of NZP-IMR and ZP-IMR is 48 PRBs and the density is 3.
- AWGN radio propagation conditions.

The performance with larger bandwidth of NZP-IMR and ZP-IMR is equal to or better than the accuracy requirements in Tables 10.1.27.2.1-1 and 10.1.27.2.1-2.

Table 10.1.27.2.1-1: L1-SINR absolute accuracy for SSB based CMR and NZP-IMR in FR1

Accuracy		**Conditions**					
Normal condition	**Extreme condition**	**SSB-CMR Ês/Iot**	**NZP-IMR Ês/Iot**	**Io [Note 1] range**			
				NR operating band groups [Note 2]	**Minimum Io**		**Maximum Io**
dB	**dB**	**dB**	**dB**		**dBm / SCS_{SSB}**	**dBm/$BW_{Channel}$**	**dBm/$BW_{Channel}$**
					SCS_{SSB} = 15 kHz / **SCS_{SSB} = 30 kHz**		

±4.0	±5.0	≥0	≥0	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
				NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
				NR_TDD_FR1_C	-120	-117	N/A	-50
				NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
				NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
				NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
				NR_FDD_FR1_G	-118	-115	N/A	-50
				NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2. NOTE 3: The requirements apply for SSB-CMR Ês/Iot ≤ [6] dB with SCS 15kHz or 30kHz under NR high speed scenarios.								

Table 10.1.27.2.1-2: L1-SINR absolute accuracy for SSB based CMR and ZP-IMR in FR1

Accuracy		**Conditions**					
Normal condition	**Extreme condition**	**SSB-CMR Ês/Iot**	**Io [Note 1] range**				
			NR operating band groups [Note 2]	**Minimum Io**			**Maximum Io**
dB	**dB**	**dB**		**dBm / SCS_{SSB}**		**dBm/$BW_{Channel}$**	**dBm/$BW_{Channel}$**
				SCS_{SSB} = 15 kHz	**SCS_{SSB} = 30 kHz**		
±4.5	±5.5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2. NOTE 3: The requirements apply for SSB Ês/Iot ≤ [6] dB with SCS 15kHz or 30kHz under NR high speed scenarios.							

10.1.27.2.2 Relative Accuracy

The relative accuracy of SSB based L1-SINR is defined as the L1-SINR measured from one SSB configured as CMR and one IMR configured as IMR compared to the largest measured value of L1-SINR among all SSBs and IMRs of the serving cell.

The accuracy requirements are defined in Table 10.1.27.2.2-1 for SSB based CMR and NZP-IMR and in Table 10.1.27.2.2-2 for SSB based CMR and ZP-IMR.

The accuracy requirements in Tables 10.1.27.2.2-1 and 10.1.27.2.2-2 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for L1-SINR measurements are fulfilled according to Annex B.2.8.2 for a corresponding Band for each relevant SSB based CMR and IMR.
- The bandwidth of NZP-IMR and ZP-IMR is 48 PRBs and the density is 3.
- AWGN radio propagation conditions.

The performance with larger bandwidth of NZP-IMR and ZP-IMR is equal to or better than the accuracy requirements in Tables 10.1.27.2.2-1 and 10.1.27.2.2-2.

Table 10.1.27.2.2-1: L1-SINR relative accuracy for SSB based CMR and NZP-IMR in FR1

Accuracy		Conditions						
Normal condition	Extreme condition	SSB-CMR Ês/Iot Note 2	NZP-IMR Ês/Iot	Io Note 1 range				
				NR operating band groups Note 3	Minimum Io			Maximum Io
dB	dB	dB	dB		dBm / SCS_{SSB}		$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
					SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±[3.0]	±[4.0]	≥0	≥0	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
				NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
				NR_TDD_FR1_C	-120	-117	N/A	-50
				NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
				NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
				NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
				NR_FDD_FR1_G	-118	-115	N/A	-50
				NR_FDD_FR1_H	-117.5	-114.5	N/A	-50

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The parameter SSB CMR Ês/Iot is the minimum SSB CMR Ês/Iot of the pair of SSBs to which the requirement applies.
NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2.
NOTE 4: The requirements apply for SSB-CMR Ês/Iot ≤ [6] dB with SCS 15kHz or 30kHz under NR high speed scenarios.

Table 10.1.27.2.2-2: L1-SINR relative accuracy for SSB based CMR and ZP-IMR in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB-CMR Ês/Iot Note 2	Io Note 1 range				
			NR operating band groups Note 3	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±[3.5]	±[4.5]	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The parameter SSB CMR Ês/Iot is the minimum SSB CMR Ês/Iot of the pair of SSBs to which the requirement applies.

NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2.
NOTE 4: The requirements apply for SSB Ês/Iot ≤ [6] dB with SCS 15kHz or 30kHz under NR high speed scenarios.

10.1.27.3 L1-SINR accuracy requirements with CSI-RS based CMR and dedicated IMR configured

10.1.27.3.1 Absolute Accuracy

Unless otherwise specified, the requirements for absolute accuracy of CSI-RS based L1-SINR in this clause apply to all CSI-RS resources configured as CMR and dedicated resources configured as IMR of the serving cell configured for L1-SINR measurement.

The accuracy requirements are defined in Table 10.1.27.3.1-1 for CSI-RS based CMR and NZP-IMR and in Table 10.1.27.3.1-2 for CSI-RS based CMR and ZP-IMR.

The accuracy requirements in Tables 10.1.27.3.1-1 and 10.1.27.3.1-2 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for L1-SINR measurements are fulfilled according to Annex B.2.8.3 for a corresponding Band for each relevant CSI-RS based CMR and IMR.
- The bandwidth of CSI-RS as CMR, NZP-IMR and ZP-IMR is 48 PRBs and the density is 3.
- AWGN radio propagation conditions.

The performance with larger bandwidth of CSI-RS as CMR, NZP-IMR and ZP-IMR is equal to or better than the accuracy requirements in Tables 10.1.27.3.1-1 and 10.1.27.3.1-2.

Table 10.1.27.3.1-1: L1-SINR absolute accuracy for CSI-RS based CMR and NZP-IMR in FR1

Accuracy		Conditions							
Normal condition	Extreme condition	CSI-RS CMR Ês/Iot	NZP-IMR Ês/Iot	Io [Note 1] range					
				NR operating band groups [Note 2]	Minimum Io				Maximum Io
dB	dB	dB	dB		dBm / SCS_{CSI-RS}			dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
					SCS_{CSI-RS} = 15 kHz	SCS_{CSI-RS} = 30 kHz	SCS_{CSI-RS} = 60 kHz		
±4.0	±5.0	≥0	≥0	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-50
				NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-50
				NR_TDD_FR1_C	-120	-117	-114	N/A	-50
				NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-50
				NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-50
				NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-50
				NR_FDD_FR1_G	-118	-115	-112	N/A	-50
				NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-50

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2.

NOTE 3: The requirements apply for CSI-RS CMR Ês/Iot ≤ [6] dB with SCS 15kHz or 30kHz under NR high speed scenarios.

Table 10.1.27.3.1-2: L1-SINR absolute accuracy for CSI-RS based CMR and ZP-IMR in FR1

Accuracy		Conditions						
Normal condition	Extreme condition	CSI-RS CMR Ês/Iot	Io [Note 1] range					
			NR operating band groups [Note 2]	Minimum Io				Maximum Io
dB	dB	dB		dBm / SCS_{CSI-RS}			$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{CSI-RS} = 15 kHz	SCS_{CSI-RS} = 30 kHz	SCS_{CSI-RS} = 60 kHz		
±4.5	±5.5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	-114	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	-112	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-50

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2.
NOTE 3: The requirements apply for CSI-RS CMR Ês/Iot ≤ [6] dB with SCS 15kHz or 30kHz under NR high speed scenarios.

10.1.27.3.2 Relative Accuracy

The relative accuracy of CSI-RS based L1-SINR is defined as the L1-SINR measured from one CSI-RS configured as CMR and one IMR configured as IMR compared to the largest measured value of L1-SINR among all CSI-RS and IMR resources of the serving cell.

The accuracy requirements are defined in Table 10.1.27.3.2-1 for CSI-RS based CMR and NZP-IMR and in Table 10.1.27.3.2-2 for CSI-RS based CMR and ZP-IMR.

The accuracy requirements in Tables 10.1.27.3.2-1 and 10.1.27.3.2-2 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for L1-SINR measurements are fulfilled according to Annex B.2.8.3 for a corresponding Band for each relevant CSI-RS based CMR and IMR.
- The bandwidth of CSI-RS as CMR, NZP-IMR and ZP-IMR is 48 PRBs and the density is 3.
- AWGN radio propagation conditions.

The performance with larger bandwidth of CSI-RS as CMR, NZP-IMR and ZP-IMR is equal to or better than the accuracy requirements in Tables 10.1.27.3.2-1 and 10.1.27.3.2-2.

Table 10.1.27.3.2-1: L1-SINR relative accuracy for CSI-RS based CMR and NZP-IMR in FR1

Accuracy		Conditions		
Normal condition	Extreme condition	CSI-RS CMR Ês/Iot Note 2	NZP-IMR Ês/Iot	Io [Note 1] range

				NR operating band groups [Note 3]	Minimum Io				Maximum Io
dB	dB	dB	dB		dBm / SCS_{CSI-RS}			$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
					SCS_{CSI-RS} = 15 kHz	SCS_{CSI-RS} = 30 kHz	SCS_{CSI-RS} = 60 kHz		
±[3.0]	±[4.0]	≥0	≥0	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-50
				NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-50
				NR_TDD_FR1_C	-120	-117	-114	N/A	-50
				NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-50
				NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-50
				NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-50
				NR_FDD_FR1_G	-118	-115	-112	N/A	-50
				NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-50

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The parameter CSI-RS CMR Ês/Iot is the minimum CMR CMR Ês/Iot of the pair of CSI-RS resources to which the requirement applies.
NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2.
NOTE 4: The requirements apply for CSI-RS CMR Ês/Iot ≤ [6] dB with SCS 15kHz or 30kHz under NR high speed scenarios.

Table 10.1.27.3.2-2: L1-SINR relative accuracy for CSI-RS based CMR and ZP-IMR in FR1

Accuracy		Conditions							
Normal condition	Extreme condition	CSI-RS CMR Ês/Iot [Note 2]	Io [Note 1] range						
			NR operating band groups [Note 3]	Minimum Io					Maximum Io
dB	dB	dB		dBm / SCS_{CSI-RS}			$dBm/BW_{Channel}$	$dBm/BW_{Channel}$	
				SCS_{CSI-RS} = 15 kHz	SCS_{CSI-RS} = 30 kHz	SCS_{CSI-RS} = 60 kHz			
±[3.5]	±[4.5]	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-50	
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-50	
			NR_TDD_FR1_C	-120	-117	-114	N/A	-50	
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-50	
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-50	
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-50	
			NR_FDD_FR1_G	-118	-115	-112	N/A	-50	
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-50	

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The parameter CSI-RS CMR Ês/Iot is the minimum CMR CMR Ês/Iot of the pair of CSI-RS resources to which the requirement applies.
NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2.
NOTE 4: The requirements apply for CSI-RS CMR Ês/Iot ≤ [6] dB with SCS 15kHz or 30kHz under NR high speed scenarios.

10.1.28 L1-SINR accuracy requirements for FR2

10.1.28.1 L1-SINR accuracy requirements with CSI-RS based CMR and no dedicated IMR configured

10.1.28.1.1 Absolute Accuracy

Unless otherwise specified, the requirements for absolute accuracy of CSI-RS based L1-SINR in this clause apply to all CSI-RS resources configured as CMR and no dedicated resource configured as IMR of the serving cell configured for L1-SINR measurement.

The accuracy requirements in Table 10.1.28.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for L1-SINR measurements are fulfilled according to Annex B.2.8.1 for a corresponding Band for each relevant CSI-RS based CMR.
- The bandwidth of CSI-RS as CMR is 48 PRBs and the density is 3.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].
- AWGN radio propagation conditions.

The performance with larger bandwidth of CSI-RS as CMR is equal to or better than the accuracy requirements in Table 10.1.28.1.1-1.

Table 10.1.28.1.1-1: L1-SINR absolute accuracy for CSI-RS based CMR only in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	CSI-RS CMR Ês/Iot Note 3	Io Note 1 range		
			Minimum Io		Maximum Io
dB	dB	dB	dBm / SCS_{CSI-RS} Note 2	dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
			SCS_{CSI-RS} = 60kHz	SCS_{CSI-RS} = 120kHz	
±5.5	±6.5	≥-3	Same value as CSI-RS_RP in Table in B.2.8.1, according to UE Power class, operating band and angle of arrival	N/A	-50

NOTE 1: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.
NOTE 2: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.
NOTE 3: In the test cases, the CSI-RS CMR Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.

10.1.28.1.2 Relative Accuracy

The relative accuracy of CSI-RS based L1-SINR is defined as the L1-SINR measured from one CSI-RS compared to the largest measured value of L1-SINR among all CSI-RS resources of the serving cell.

The accuracy requirements in Table 10.1.28.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for L1-SINR measurements are fulfilled according to Annex B.2.8.1 for a corresponding Band for each relevant CSI-RS based CMR.
- The bandwidth of CSI-RS as CMR is 48 PRBs and the density is 3.

- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].
- AWGN radio propagation conditions.

The performance with larger bandwidth of CSI-RS as CMR is equal to or better than the accuracy requirements in Table 10.1.28.1.2-1.

Table 10.1.28.1.2-1: L1-SINR relative accuracy for CSI-RS based CMR only in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	CSI-RS CMR Ês/Iot Note 2, Note 4	Io Note 1 range		
			Minimum Io		Maximum Io
dB	dB	dB	dBm / SCS_{CSI-RS} Note 3		$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
			SCS_{CSI-RS} = 60kHz	SCS_{CSI-RS} = 120kHz		
±4.5	±5.5	≥-3	Same value as CSI-RS_RP in Table in B.2.8.1, according to UE Power class, operating band and angle of arrival		N/A	-50

NOTE 1: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.
NOTE 2: The parameter CSI-RS CMR Ês/Iot is the minimum CSI-RS CMR Ês/Iot of the pair of CSI-RS resources to which the requirement applies.
NOTE 3: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.
NOTE 4: In the test cases, the CSI-RS CMR Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.

10.1.28.2 L1-SINR accuracy requirements with SSB based CMR and dedicated IMR configured

10.1.28.2.1 Absolute Accuracy

Unless otherwise specified, the requirements for absolute accuracy of SSB based L1-SINR in this clause apply to all SSBs configured as CMR and dedicated resources configured as IMR of the serving cell configured for L1-SINR measurement.

The accuracy requirements are defined in Table 10.1.28.2.1-1 for SSB based CMR and NZP-IMR and in Table 10.1.28.2.1-2 for SSB based CMR and ZP-IMR.

The accuracy requirements in Tables 10.1.28.2.1-1 and 10.1.28.2.1-2 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for L1-SINR measurements are fulfilled according to Annex B.2.8.2 for a corresponding Band for each relevant SSB based CMR and IMR.
- The bandwidth of NZP-IMR and ZP-IMR is 48 PRBs and the density is 3.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].
- AWGN radio propagation conditions.
- SSB based CMR and IMR in the test come from the same direction.

The performance with larger bandwidth of NZP-IMR and ZP-IMR is equal to or better than the accuracy requirements in Tables 10.1.28.2.1-1 and 10.1.28.2.1-2.

Table 10.1.28.2.1-1: L1-SINR absolute accuracy for SSB based CMR and NZP-IMR in FR2

Accuracy	Conditions

Normal condition	Extreme condition	SSB CMR Ês/Iot Note 3	NZP-IMR Ês/Iot Note 3	Io Note 1 range		
				Minimum Io		Maximum Io
dB	dB	dB	dB	dBm / SCS_{SSB} Note 2	dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
				SCS_{SSB} = 120kHz	SCS_{SSB} = 240kHz	
±4.0	±5.0	≥0	≥0	Same value as SSB_RP in Table in B.2.8.2, according to UE Power class, operating band and angle of arrival	N/A	-50
NOTE 1: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth. NOTE 2: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival. NOTE 3: In the test cases, the SSB Ês/Iot, NZP-IMR Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.						

Table 10.1.28.2.1-2: L1-SINR absolute accuracy for SSB based CMR and ZP-IMR in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	SSB CMR Ês/Iot Note 3	Io Note 1 range		
			Minimum Io		Maximum Io
dB	dB	dB	dBm / SCS_{SSB} Note 2	dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
			SCS_{SSB} = 120kHz	SCS_{SSB} = 240kHz	
±4.5	±5.5	≥-3	Same value as SSB_RP in Table in B.2.8.2, according to UE Power class, operating band and angle of arrival	N/A	-50
NOTE 1: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth. NOTE 2: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival. NOTE 3: In the test cases, the SSB CMR Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.					

10.1.28.2.2 Relative Accuracy

The relative accuracy of SSB based L1-SINR is defined as the L1-SINR measured from one SSB configured as CMR and one IMR configured as IMR compared to the largest measured value of L1-SINR among all SSB based CMRs and IMRs of the serving cell.

The accuracy requirements are defined in Table 10.1.28.2.2-1 for SSB based CMR and NZP-IMR and in Table 10.1.28.2.2-2 for SSB based CMR and ZP-IMR.

The accuracy requirements in Tables 10.1.28.2.2-1 and 10.1.28.2.2-2 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for L1-SINR measurements are fulfilled according to Annex B.2.8.2 for a corresponding Band for each relevant SSB based CMR and IMR.
- The bandwidth of NZP-IMR and ZP-IMR is 48 PRBs and the density is 3.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].
- AWGN radio propagation conditions.

- SSB based CMR and IMR in the test come from the same direction.

The performance with larger bandwidth of NZP-IMR and ZP-IMR is equal to or better than the accuracy requirements in Tables 10.1.28.2.2-1 and 10.1.28.2.2-2.

Table 10.1.28.2.2-1: L1-SINR relative accuracy for SSB based CMR and NZP-IMR in FR2

Accuracy		Conditions				
Normal condition	Extreme condition	SSB CMR Ês/Iot Note 2, Note 4	NZP-IMR Ês/Iot Note 4	Io Note 1 range		
				Minimum Io		Maximum Io
dB	dB	dB	dB	dBm / SCS_{SSB} Note 3	dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
				SCS_{SSB} = 120kHz	SCS_{SSB} = 240kHz	
±3.0	±4.0	≥0	≥0	Same value as SSB_RP in Table in B.2.8.2, according to UE Power class, operating band and angle of arrival	N/A	-50

NOTE 1: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.
NOTE 2: The parameter SSB CMR Ês/Iot is the minimum SSB CMR Ês/Iot of the pair of SSBs to which the requirement applies.
NOTE 3: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.
NOTE 4: In the test cases, the SSB CMR Ês/Iot, NZP-IMR Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.

Table 10.1.28.2.2-2: L1-SINR relative accuracy for SSB based CMR and ZP-IMR in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	SSB CMR Ês/Iot Note 2, Note 4	Io Note 1 range		
			Minimum Io		Maximum Io
dB	dB	dB	dBm / SCS_{SSB} Note 3	dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
			SCS_{SSB} = 120kHz	SCS_{SSB} = 240kHz	
±3.5	±4.5	≥-3	Same value as SSB_RP in Table in B.2.8.2, according to UE Power class, operating band and angle of arrival	N/A	-50

NOTE 1: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.
NOTE 2: The parameter SSB CMR Ês/Iot is the minimum SSB CMR Ês/Iot of the pair of SSBs to which the requirement applies.
NOTE 3: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.
NOTE 4: In the test cases, the SSB CMR Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.

10.1.28.3 L1-SINR accuracy requirements with CSI-RS based CMR and dedicated IMR configured

10.1.28.3.1 Absolute Accuracy

Unless otherwise specified, the requirements for absolute accuracy of CSI-RS based L1-SINR in this clause apply to all CSI-RS resources as CMR and dedicated resources configured as IMR of the serving cell configured for L1-SINR measurement.

The accuracy requirements are defined in Table 10.1.28.3.1-1 for CSI-RS based CMR and NZP-IMR and in Table 10.1.28.3.1-2 for CSI-RS based CMR and ZP-IMR.

The accuracy requirements in Tables 10.1.28.3.1-1 and 10.1.28.3.1-2 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for L1-SINR measurements are fulfilled according to Annex B.2.8.3 for a corresponding Band for each relevant CSI-RS based CMR and IMR.
- The bandwidth of CSI-RS as CMR, NZP-IMR and ZP-IMR is 48 PRBs and the density is 3.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].
- AWGN radio propagation conditions.
- CSI-RS based CMR and IMR in the test come from the same direction.

The performance with larger bandwidth of CSI-RS as CMR, NZP-IMR and ZP-IMR is equal to or better than the accuracy requirements in Tables 10.1.28.3.1-1 and 10.1.28.3.1-2.

Table 10.1.28.3.1-1: L1-SINR absolute accuracy for CSI-RS based CMR and NZP-IMR in FR2

Accuracy		Conditions				
Normal condition	Extreme condition	CSI-RS CMR Ês/Iot Note 3	NZP-IMR Ês/Iot Note 3	Io Note 1 range		
				Minimum Io		Maximum Io
dB	dB	dB	dB	dBm / SCS_{CSI-RS} Note 2	dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
				SCS_{CSI-RS} = 60kHz	SCS_{CSI-RS} = 120kHz	
±4.0	±5.0	≥0	≥0	Same value as CSI-RS_RP in Table in B.2.8.3, according to UE Power class, operating band and angle of arrival	N/A	-50
NOTE 1: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.						
NOTE 2: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.						
NOTE 3: In the test cases, the CSI-RS Ês/Iot, NZP-IMR Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.						

Table 10.1.28.3.1-2: L1-SINR absolute accuracy for CSI-RS based CMR and ZP-IMR in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	CSI-RS CMR Ês/Iot Note 3	Io Note 1 range		
			Minimum Io		Maximum Io
dB	dB	dB	dBm / SCS_{CSI-RS} Note 2	dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
			SCS_{CSI-RS} = 60kHz	SCS_{CSI-RS} = 120kHz	
±4.5	±5.5	≥-3	Same value as CSI-RS_RP in Table in B.2.8.3, according to UE Power class, operating band and angle of arrival	N/A	-50
NOTE 1: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.					
NOTE 2: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.					
NOTE 3: In the test cases, the CSI-RS Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.					

10.1.28.3.2 Relative Accuracy

The relative accuracy of CSI-RS based L1-SINR is defined as the L1-SINR measured from one CSI-RS configured as CMR and one IMR configured as IMR compared to the largest measured value of L1-SINR among all CSI-RS based CMRs and IMRs of the serving cell.

The accuracy requirements are defined in Table 10.1.28.3.2-1 for CSI-RS based CMR and NZP-IMR and in Table 10.1.28.3.2-2 for CSI-RS based CMR and ZP-IMR.

The accuracy requirements in Tables 10.1.28.3.2-1 and 10.1.28.3.2-2 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for L1-SINR measurements are fulfilled according to Annex B.2.8.3 for a corresponding Band for each relevant CSI-RS based CMR and IMR.
- The bandwidth of CSI-RS as CMR, NZP-IMR and ZP-IMR is 48 PRBs and the density is 3.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].
- AWGN radio propagation conditions.
- CSI-RS based CMR and IMR in the test come from the same direction.

The performance with larger bandwidth of CSI-RS as CMR, NZP-IMR and ZP-IMR is equal to or better than the accuracy requirements in Tables 10.1.28.3.2-1 and 10.1.28.3.2-2.

Table 10.1.28.3.2-1: L1-SINR relative accuracy for CSI-RS based CMR and NZP-IMR in FR2

Accuracy		Conditions				
Normal condition	Extreme condition	CSI-RS CMR Ês/Iot Note 2, Note 4	NZP-IMR Ês/Iot Note 4	Io Note 1 range		
				Minimum Io		Maximum Io
dB	dB	dB	dB	dBm / SCS_{CSI-RS} Note 3	dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
				SCS_{CSI-RS} = 60kHz	SCS_{CSI-RS} = 120kHz	
±3.0	±4.0	≥0	≥0	Same value as CSI-RS_RP in Table in B.2.8.3, according to UE Power class, operating band and angle of arrival	N/A	-50

NOTE 1: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.
NOTE 2: The parameter CSI-RS CMR Ês/Iot is the minimum CSI-RS CMR Ês/Iot of the pair of CSI-RS resources to which the requirement applies.
NOTE 3: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.
NOTE 4: In the test cases, the CSI-RS CMR Ês/Iot, NZP-IMR Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.

Table 10.1.28.3.2-2: L1-SINR relative accuracy for CSI-RS based CMR and ZP-IMR in FR2

Accuracy		Conditions		
Normal condition	Extreme condition	CSI-RS CMR Ês/Iot Note 2, Note 4	Io Note 1 range	
			Minimum Io	Maximum Io

dB	dB	dB	dBm / SCS_{CSI-RS} Note 3		dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
			SCS_{CSI-RS} = 60kHz	SCS_{CSI-RS} = 120kHz		
±3.5	±4.5	≥-3	Same value as CSI-RS_RP in Table in B.2.8.3, according to UE Power class, operating band and angle of arrival		N/A	-50
NOTE 1: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth. NOTE 2: The parameter CSI-RS CMR Ês/Iot is the minimum CSI-RS CMR Ês/Iot of the pair of CSI-RS resources to which the requirement applies. NOTE 3: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival. NOTE 4: In the test cases, the CSI-RS CMR Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.						

10.1.29 Intra-frequency RSRQ accuracy requirements under CCA

10.1.29.1 Intra-frequency SS-RSRQ accuracy requirements in FR1

10.1.29.1.1 Absolute SS-RSRQ Accuracy

Unless otherwise specified, the requirements for absolute accuracy of SS-RSRQ in this clause apply to a cell on the same frequency as that of the serving cell under CCA.

The accuracy requirements in Table 10.1.29.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3F of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.8 for a corresponding Band for each relevant SSB.

Table 10.1.29.1.1-1: SS-RSRQ intra-frequency absolute accuracy under CCA

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/Iot	Io Note 1 range				
			NR operating band groups Note 3	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±2.5	±4	≥-3	NR_CCA_FR1_I	-117	-114	N/A	-50
			NR_CCA_FR1_J	-116.5	-113.5		
±3.5	±4	≥-6	Note 2	Note 2	Note 2	Note 2	Note 2
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement. NOTE 3: NR operating band groups are as defined in clause 3.5.2.							

10.1.30 Inter-frequency RSRQ accuracy requirements under CCA

10.1.30.1 Inter-frequency SS-RSRQ accuracy requirements in FR1

10.1.30.1.1 Aboslute Accuracy of SS-RSRQ

The requirements for absolute accuracy of SS-RSRQ in this clause apply to a cell on a frequency under CCA that has different carrier frequency from the serving cell.

The accuracy requirements in Table 10.1.30.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3F of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.9 for a corresponding Band for each relevant SSB.

Table 10.1.30.1.1-1: SS-RSRQ inter-frequency absolute accuracy under CCA

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/Iot	Io Note 1 range				
			NR operating band groups Note 3	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±2.5	±4	≥-3	NR_CCA_FR1_I	-117	-114	N/A	-50
			NR_CCA_FR1_J	-116.5	-113.5		
±3.5	±4	≥-6	Note 2	Note 2	Note 2	Note 2	Note 2

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 3: NR operating band groups are as defined in clause 3.5.2.

10.1.30.1.2 Relative Accuracy of SS-RSRQ

The relative accuracy of SS-RSRQ in inter-frequency case is defined as the RSRQ measured from one cell on a frequency compared to the RSRP measured from another cell on a different frequency, with at least one of the two frequencies being under CCA.

The accuracy requirements in Table 10.1.30.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3F of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.9 for a corresponding Band for each relevant SSB.
- $|SSB_RP1_{dBm} - SSB_RP2_{dBm}| \leq 27$ dB
- |Channel 1_Io -Channel 2_Io | ≤ 20 dB

Table 10.1.30.1.2-1: SS-RSRQ inter-frequency relative accuracy under CCA

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/Iot Note 2	Io Note 1 range				
			NR operating band groups Note 4	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±3	±4	≥-3	NR_CCA_FR1_I	-117	-114	N/A	-50
			NR_CCA_FR1_J	-116.5	-113.5		
±4	±4	≥-6	Note 3	Note 3	Note 3	Note 3	Note 3

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The parameter SSB Ês/Iot is the minimum SSB Ês/Iot of the pair of cells to which the requirement applies.
NOTE 3: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 4: NR operating band groups are as defined in clause 3.5.2.

10.1.31 Intra-frequency SINR accuracy requirements under CCA

10.1.31.1 Intra-frequency SS-SINR accuracy requirements in FR1

10.1.31.1.1 Absolute SS-SINR Accuracy

Unless otherwise specified, the requirements for absolute accuracy of SS-SINR in this clause apply to a cell on the same frequency as that of the serving cell under CCA.

The accuracy requirements in Table 10.1.31.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3F of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.8 for a corresponding Band.

Table 10.1.31.1.1-1: SS-SINR intra-frequency absolute accuracy under CCA

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/Iot Note 3	Io Note 1 range				
			NR operating band groups Note 4	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±3.0	±4	≥-3	NR_CCA_FR1_I	-117	-114	N/A	-50
			NR_CCA_FR1_J	-116.5	-113.5		
±3.5	±4	≥-6	Note 2	Note 2	Note 2	Note 2	Note 2
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement. NOTE 3: The requirements apply for SSB Ês/Iot ≤ 25 dB. NOTE 4: NR operating band groups are as defined in clause 3.5.2.							

10.1.32 Inter-frequency SINR accuracy requirements under CCA

10.1.32.1 Inter-frequency SS-SINR accuracy requirements in FR1

10.1.32.1.1 Aboslute Accuracy of SS-SINR

The requirements for absolute accuracy of SS-SINR in this clause apply to a cell on a frequency under CCA that has different carrier frequency from the serving cell.

The accuracy requirements in Table 10.1.32.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3F of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.9 for a corresponding Band.

Table 10.1.32.1.1-1: SS-SINR inter-frequency absolute accuracy under CCA

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/Iot Note 3	Io Note 1 range				
			NR operating band groups Note 4	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
			NR_CCA_FR1_I	-117	-114	N/A	-50

±3.0	±4	≥-3	NR_CCA_FR1_J	116.5	-113.5		
±3.5	±4	≥-6	Note 2	Note 2	Note 2	Note 2	Note 2

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 3: The requirements apply for SSB Ês/Iot ≤ 25 dB.
NOTE 4: NR operating band groups are as defined in clause 3.5.2.

10.1.32.1.2 Relative Accuracy of SS-SINR

The relative accuracy of SS-SINR in inter frequency case is defined as the SS-SINR measured from one cell on a frequency compared to the SS-SINR measured from another cell on a different frequency, with at least one of the two frequencies being under CCA.

The accuracy requirements in Table 10.1.32.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3F of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.9 for a corresponding Band.
- SSB_RP1_{dBm} - $SSB_RP2_{dBm}| \leq 27$ dB
- |Channel 1_Io -Channel 2_Io | ≤ 20 dB

Table 10.1.32.1.2-1: SS-SINR inter-frequency relative accuracy under CCA

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/Iot Note 2,4	Io Note 1 range				
			NR operating band groups Note 5	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{SSB} = 120 kHz	SCS_{SSB} = 240 kHz		
±3.5	±4	≥-3	NR_CCA_FR1_I	-117	-114	N/A	-50
			NR_CCA_FR1_J	-116.5	-113.5		
±4	±4	≥-6	Note 3	Note 3	Note 3	Note 3	Note 3

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The parameter SSB Ês/Iot is the minimum SSB Ês/Iot of the pair of cells to which the requirement applies.
NOTE 3: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 4: The requirements apply for SSB Ês/Iot ≤ 25 dB.
NOTE 5: NR operating band groups are as defined in clause 3.5.2.

10.1.33 L1-RSRP accuracy requirements under CCA

10.1.33.1 SSB based L1-RSRP accuracy requirements in FR1

10.1.33.1.1 Absolute Accuracy

Unless otherwise specified, the requirements for absolute accuracy of SSB based L1-RSRP in this clause apply to all SSBs of the serving cell configured for L1-RSRP measurement under CCA.

The accuracy requirements in Table 10.1.33.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3F of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.10.1 for a corresponding Band for each relevant SSB.

Table 10.1.33.1.1-1: SSB based L1-RSRP absolute accuracy under CCA

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/Iot	Io [Note 1] range				
			NR operating band groups [Note 2]	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±5.0	±9.5	≥-3	NR_CCA_FR1_I	-117	-114	N/A	-70
			NR_CCA_FR1_J	-116.5	-113.5		
±8.5	±11.5	≥-3	NR_CCA_FR1_I	N/A	N/A	-70	-50
			NR_CCA_FR1_J				
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: NR operating band groups are as defined in clause 3.5.2.							

10.1.33.1.2 Relative Accuracy

The relative accuracy of SSB based L1-RSRP is defined as the L1-RSRP measured from one SSB compared to the largest measured value of L1-RSRP among all SSBs of the serving cell under CCA.

The accuracy requirements in Table 10.1.33.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3F of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.10.1 for a corresponding Band for each relevant SSB.

Table 10.1.33.1.2-1: SSB based L1-RSRP relative accuracy under CCA

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/Iot [Note 2]	Io [Note 1] range				
			NR operating band groups [Note 3]	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±3	±4	≥-3	NR_CCA_FR1_I	-117	-114	N/A	-50
			NR_CCA_FR1_J	-116.5	-113.5		
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: The parameter SSB Ês/Iot is the minimum SSB Ês/Iot of the pair of SSBs to which the requirement applies. NOTE 3: NR operating band groups are as defined in clause 3.5.2.							

10.1.34 RSSI measurements under CCA

10.1.34.1 Intra-frequency absolute RSSI measurement accuracy requirements in FR1

The accuracy requirements for intra-frequency RSSI measurements on a carrier frequency under CCA are specified in Table 10.1.34.1-1. The requirements apply for any configured RSSI *measDuration* [2], provided that:

- All symbols duing each RSSI measurement duration are available for RSSI sampling within the same reporting interval.

The intra-frequency RSSI measurement bandwidth is the channel bandwidth defined in Clause 4 of TS 37.213 [33], where the channel has the center frequency configured by *ARFCN-valueNR*.

Table 10.1.34.1-1: Intra-frequency RSSI accuracy under CCA

Accuracy		Conditions				
Normal condition	Extreme condition	Io [Note 1] range				
		NR operating band groups [Note 2]	Minimum Io			Maximum Io
dB	dB		dBm / SCS_{SSB}		$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
			SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
[±3.5]	[±6.5]	NR_CCA_FR1_I	-117	-114	N/A	-70
		NR_CCA_FR1_J	-116.5	-113.5		
[±5.5]	[±8.5]	NR_CCA_FR1_I	N/A	N/A	-70	-50
		NR_CCA_FR1_J				
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: NR operating band groups are as defined in clause 3.5.2.						

10.1.34.2 Inter-frequency absolute RSSI measurement accuracy requirements in FR1

The accuracy requirements for inter-frequency RSSI measurements on a carrier frequency under CCA are the same as specified in clause 10.1.34.1.

The inter-frequency RSSI measurement bandwidth is the channel bandwidth defined in Clause 4 of TS 37.213 [33], where the channel has the center frequency configured by *ARFCN-valueNR*.

10.1.34.3 RSSI measurement report mapping

The reporting range of RSSI measurement is defined from -100 dBm to -25 dBm with 1 dBm resolution.

The mapping of the measured quantity is defined in Table 10.1.34.3-1. The range in the signalling may be larger than the guaranteed accuracy range, provided that the following condition is met:

the RSSI measurement bandwidth is the channel bandwidth defined in Clause 4 of TS 37.213 [33], where the channel has the center frequency configured by *ARFCN-valueNR*.

Table 10.1.34.3-1: RSSI measurement report mapping

Reported value	Measured quantity value	Unit
RSSI_00	RSSI < -100	dBm
RSSI_01	-100 ≤ RSSI < -99	dBm
RSSI_02	-99 ≤ RSSI < -98	dBm
…	…	…
RSSI_74	-27 ≤ RSSI < -26	dBm
RSSI_75	-26 ≤ RSSI < -25	dBm
RSSI_76	-25 ≤ RSSI	dBm

10.1.35 Channel occupancy measurements under CCA

10.1.35.1 Intra-frequency channel occupancy measurement accuracy requirements in FR1

The UE shall be able to correctly evaluate the intra-frequency channel occupancy configured according to TS 38.331 [2], provided that the following conditions are met:

- All symbols during each RSSI measurement duration are available for RSSI sampling within the same reporting interval,
- RSSI at the UE receiver meets the following condition with respect to the configured *channelOccupancyThreshold* [2]:

- RSSI at the UE receiver is below *channelOccupancyThreshold*- Δ_{RSSI}, or
- RSSI at the UE receiver is above *channelOccupancyThreshold*+ Δ_{RSSI},

- where Δ_{RSSI} is the applicable RSSI measurement accuracy value from the RSSI measurement accuracy requirements specified in clause 10.1.34.1.

The channel occupancy measurement bandwidth is the same as the RSSI measurement bandwidth in Clause 10.1.34.1.

10.1.35.2 Inter-frequency channel occupancy measurement accuracy requirements in FR1

The UE shall be able to correctly evaluate the inter-frequency channel occupancy configured according to TS 38.331 [2], provided that the following conditions are met:

- All symbols during each RSSI measurement duration are available for RSSI sampling within the same reporting interval,
- RSSI at the UE receiver meets the following condition with respect to the configured *channelOccupancyThreshold* [2]:
  - RSSI at the UE receiver is below *channelOccupancyThreshold*- Δ_{RSSI}, or
  - RSSI at the UE receiver is above *channelOccupancyThreshold*+ Δ_{RSSI},
- where Δ_{RSSI} is the applicable RSSI measurement accuracy value from the RSSI measurement accuracy requirements specified in clause 10.1.34.2.

The channel occupancy measurement bandwidth is the same as the RSSI measurement bandwidth in Clause 10.1.34.2.

10.1.36 Intra-frequency RSRP accuracy requirements under CCA

10.1.36.1 Intra-frequency SS-RSRP accuracy requirements in FR1

10.1.36.1.1 Absolute SS-RSRP Accuracy

Unless otherwise specified, the requirements for absolute accuracy of SS-RSRP in this clause apply to a cell on the same frequency as that of the serving cell under CCA.

The accuracy requirements in Table 10.1.36.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3F of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.8 for a corresponding Band for each relevant SSB.

Table 10.1.36.1.1-1: SS-RSRP intra-frequency absolute accuracy

Accuracy		Conditions				
Normal condition	Extreme condition	SSB Ês/Iot	Io [Note 1] range			
			NR operating band groups [Note 2]	Minimum Io		Maximum Io
dB	dB	dB		dBm / SCS_{SSB}	$dBm/BW_{Channel}$	$dBm/BW_{Channel}$

				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±4.5	±9	≥-6	NR_CCA_FR1_I	-117	-114	N/A	-70
			NR_CCA_FR1_J	-116.5	-113.5		
±8	±11	≥-6	NR_CCA_FR1_I	N/A	N/A	-70	-50
			NR_CCA_FR1_J				
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: NR operating band groups are as defined in clause 3.5.2.							

10.1.36.1.2 Relative SS-RSRP Accuracy

The relative accuracy of SS-RSRP is defined as the SS-RSRP measured from one cell compared to the SS-RSRP measured from another cell on the same frequency, or between any two SS-RSRP levels measured on the same cell under CCA.

The accuracy requirements in Table 10.1.36.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3F of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.8 for a corresponding Band for each relevant SSB.

Table 10.1.36.1.2-1: SS-RSRP intra-frequency relative accuracy under CCA

Accuracy		**Conditions**					
Normal condition	**Extreme condition**	**SSB Ês/Iot** Note 2	**Io** Note 1 **range**				
			NR operating band groups Note 4	**Minimum Io**			**Maximum Io**
dB	**dB**	**dB**		**dBm / SCS_{SSB}**		**dBm/$BW_{Channel}$**	**dBm/$BW_{Channel}$**
				SCS_{SSB} = 15 kHz	**SCS_{SSB} = 30 kHz**		
±2	±3	≥-3	NR_CCA_FR1_I	-117	-114	N/A	-50
			NR_CCA_FR1_J	-116.5	-113.5		
±3	±3	≥-6	Note 3	Note 3	Note 3	N/A	Note 3
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: The parameter SSB Ês/Iot is the minimum SSB Ês/Iot of the pair of cells to which the requirement applies. NOTE 3: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement. NOTE 4: NR operating band groups are as defined in clause 3.5.2.							

10.1.37 Inter-frequency RSRP accuracy requirements under CCA

10.1.37.1 Inter-frequency SS-RSRP accuracy requirements in FR1

10.1.37.1.1 Absolute Accuracy of SS-RSRP

The requirements for absolute accuracy of SS-RSRP in this clause apply to a cell on a frequency under CCA that has different carrier frequency from the serving cell.

The accuracy requirements in Table 10.1.37.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3F of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.9 for a corresponding Band for each relevant SSB.

Table 10.1.37.1.1-1: SS-RSRP inter-frequency absolute accuracy under CCA

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/Iot	Io [Note 1] range				
			NR operating band groups [Note 2]	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±4.5	±9	≥-6	NR_CCA_FR1_I	-117	-114	N/A	-70
			NR_CCA_FR1_J	-116.5	-113.5		
±8	±11	≥-6	NR_CCA_FR1_I	N/A	N/A	-70	-50
			NR_CCA_FR1_J				
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: NR operating band groups are as defined in clause 3.5.2.							

10.1.37.1.2 Relative Accuracy of SS-RSRP

The relative accuracy of SS-RSRP in inter frequency case is defined as the RSRP measured from one cell on a frequency compared to the RSRP measured from another cell on a different frequency, with at least one of the two frequencies being under CCA.

The accuracy requirements in Table 10.1.37.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3F of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.9 for a corresponding Band for each relevant SSB.
- $|SSB_RP1_{dBm} - SSB_RP2_{dBm}| \leq 27$ dB
- |Channel 1_Io -Channel 2_Io | ≤ 20 dB

Table 10.1.37.1.2-1: SS-RSRP inter-frequency relative accuracy under CCA

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/Iot Note 2	Io [Note 1] range				
			NR operating band groups Note 3	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±4.5	±6	≥-6	NR_CCA_FR1_I	-117	-114	N/A	-50
			NR_CCA_FR1_J	-116.5	-113.5		
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: The parameter SSB Ês/Iot is the minimum SSB Ês/Iot of the pair of cells to which the requirement applies. NOTE 3: NR operating band groups are as defined in clause 3.5.2.							

10.1.38 PRS-RSRPP Measurements

10.1.38.1 Introduction

The requirements in Clause 10.1.38.2 shall apply, provided the UE has received *nr-DL-AoD-RequestLocationInformation* message from LMF via LPP [34] requesting the UE to report one or more DL PRS-RSRPP measurements defined in TS 38.215 [4]. The requirements in Clause 10.1.38 shall apply:

- when UE is in RRC_CONNECTED state,

- when UE is in RRC_INACTIVE state.

The requirements in Clause 10.1.38.2 apply for the first path PRS-RSRP measurement.

10.1.38.2 Measurement Accuracy Requirements

10.1.38.2.1 Absolute PRS RSRPP accuracy

The absolute accuracy requirements for PRS-RSRPP measurement for FR1 defined in Table 10.1.38.2.1-1 and Table 10.1.38.2.1-3 are valid under the following conditions:

- Conditions defined in 38.101-1 Clause 7.3 for reference sensitivity are fulfilled.
- PRP $1,2|_{dBm}$ according to Annex B.2.14 for a corresponding Band

The absolute accuracy requirements for PRS-RSRPP measurement for FR2 defined in Table 10.1.38.2.1-2 and Table 10.1.38.2.1-4 are valid under the following conditions:

- Conditions defined in 38.101-2 Clause 7.3 for reference sensitivity are fulfilled.
- PRP $1,2|_{dBm}$ according to Annex B.2.14 for a corresponding Band

The absolute accuracy requirements for PRS-RSRPP measurement defined in Table 10.1.38.2.1-1 and Table 10.1.38.2.1-2 apply for the UE not supporting *supportedDL-PRS-ProcessingSamples* [34] or LMF does not indicate UE to perform positioning measurements with reduced number of samples.

The absolute accuracy requirements for PRS-RSRPP measurement defined in Table 10.1.38.2.1-3 and Table 10.1.38.2.1-4 apply for the UE supporting *supportedDL-PRS-ProcessingSamples* [34].

Note: The requriements in this clause are derived based on two-tap channel defined in 38.101-4 Annex B.2.4 (a = 1, τ_d=0.45 μs and f_D=5 Hz).

Note: The requirements in this clause are derived based on the difference between the estimated PRS-RSRPP compared to the ideal PRS-RSRPP defined as

$$\mathrm{RSRPP}_p \propto \left| \sum_k H_k \exp\left(j 2\pi D_p \frac{k}{N_{\mathrm{IFFT}}} \right) \right|^2$$

Where:

H_k is the effective channel frequency response (over REs occupied by PRS) measured without receiver noise.

D_p is the exact delay of the p-th path in the channel model.

Table 10.1.38.2.1-1: PRS-RSRPP absolute accuracy for FR1

Accuracy		Conditions						
					Io Note 7 range			
Normal condition	Extreme condition	PRS Ês/Iot	PRS BW	Repetition factor ($T_{rep}^{PRS} * L_{PRS} / K_{comb}^{PRS}$)	NR operating band groups Note 8	Minimum Io Note 1 dBm / SCS_{PRS}		Maximum Io
						dBm / SCS_{PRS}		
dB	dB	dB	PRB	-		dBm/15kHz Note 6	dBm/30kHz Note 6	dBm/60kHz Note 6	$dBm/BW_{Channel}$
±TBD	±TBD	≥-3	≥24	All	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-127	-124	-121	-50

					NR_FDD_FR1_B	-126.5	-123.5	-120.5	-50
					NR_TDD_FR1_C	-126	-123	-120	-50
					NR_FDD_FR1_D, NR_TDD_FR1_D	-125.5	-122.5	-119.5	-50
					NR_FDD_FR1_E, NR_TDD_FR1_E	-125	-122	-119	-50
					NR_FDD_FR1_F	-124.5	-121.5	-118.5	-50
					NR_FDD_FR1_G	-124	-121	-118	-50
					NR_FDD_FR1_H	-123.5	-120.5	-117.5	-50
					Note 4				
					Note 4				
±TBD	±TBD	≥-13	24 ≤ BW ≤ 52	All	Note 4				
±TBD	±TBD		52< BW≤ 104	All	Note 4				
±TBD	±TBD		BW >104	All	Note 4				

NOTE 1: This minimum Io condition is expressed as the average Io per RE over all REs in an OFDM symbol.
NOTE 2: Void.
NOTE 3: PRS bandwidth is as indicated in *prs-Bandwidth* in the OTDOA or DL-AoD assistance data defined in [34].
NOTE 4: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth ≥ [24] RB.
NOTE 5: The serving cell, the reference cell, and the measured neighbour cell i are on the same carrier frequency.
NOTE 6: The condition level is increased by Δ>0, when applicable, as described in Sections B.3.2 and B.3.3.
NOTE 7: The Io is defined in PRS positioning subframes. The same Io range applies to PRS and non-PRS symbols. Io levels are different in PRS and non-PRS symbols within the same subframe.
NOTE 8: NR operating band groups are as defined in Section 3.5.2.

Table 10.1.38.2.1-2: PRS-RSRPP absolute accuracy for FR2

Accuracy		**Conditions**				
					Io [Note 7] range	
Normal condition	**Extreme condition**	**PRS Ês/Iot**	**PRS BW**	**Repetition factor** ($T_{rep}^{PRS} * L_{PRS} / K_{comb}^{PRS}$)	**Minimum Io [Note 1] dBm / SCS_{PRS}**	**Maximum Io**
					dBm / SCS_{PRS}	**dBm/$BW_{Channel}$**
dB	**dB**	**dB**	**PRB**	**-**	**dBm/120kHz [Note 6]** / **dBm/60kHz [Note 6]**	
±TBD	±TBD	≥-3	≥24	All	Same value as PRP in Table B.2.X-2, according to UE Power class, operating band and angle of arrival	-50
					Note 4	
					Note 4	
±TBD	±TBD	≥-13	24 ≤ BW ≤ 64	All	Note 4	
±TBD	±TBD		BW >64	All	Note 4	

NOTE 1: This minimum Io condition is expressed as the average Io per RE over all REs in an OFDM symbol.
NOTE 2: Void.
NOTE 3: PRS bandwidth is as indicated in *prs-Bandwidth* in the OTDOA or DL-AoD assistance data defined in [34].
NOTE 4: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth ≥ [24] RB.

NOTE 5: The serving cell, the reference cell, and the measured neighbour cell i are on the same carrier frequency.
NOTE 6: The condition level is increased by Δ>0, when applicable, as described in Sections B.3.2 and B.3.3.
NOTE 7: The Io is defined in PRS positioning subframes. The same Io range applies to PRS and non-PRS symbols. Io levels are different in PRS and non-PRS symbols within the same subframe.
NOTE 8: NR operating band groups are as defined in Section 3.5.2.

Table 10.1.38.2.1-3: PRS-RSRPP absolute accuracy for FR1 for reduced number of samples

Accuracy		Conditions							
					Io Note 7 range				
Normal condition	Extreme condition	PRS $\hat{E}_s/I_{ot}$	PRS BW	Repetition factor ($T_{rep}^{PRS} * L_{PRS}/K_{comb}^{PRS}$)	NR operating band groups Note 8	Minimum Io Note 1 dBm / SCS_{PRS}			Maximum Io
						dBm / SCS_{PRS}			dBm/$BW_{Channel}$
dB	dB	dB	PRB	-		dBm/15kHz Note 6	dBm/30kHz Note 6	dBm/60kHz Note 6	
TBD	TBD	≥0	≥48	All	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-127	-124	-121	-50
					NR_FDD_FR1_B	-126.5	-123.5	-120.5	-50
					NR_TDD_FR1_C	-126	-123	-120	-50
					NR_FDD_FR1_D, NR_TDD_FR1_D	-125.5	-122.5	-119.5	-50
					NR_FDD_FR1_E, NR_TDD_FR1_E	-125	-122	-119	-50
					NR_FDD_FR1_F	-124.5	-121.5	-118.5	-50
					NR_FDD_FR1_G	-124	-121	-118	-50
					NR_FDD_FR1_H	-123.5	-120.5	-117.5	-50
					Note 4				
					Note 4				
±TBD	±TBD	≥-6	48 ≤ BW ≤ 52	All	Note 4				
±TBD	±TBD		52< BW≤ 104	All	Note 4				
±TBD	±TBD		BW >104	All	Note 4				

NOTE 1: This minimum Io condition is expressed as the average Io per RE over all REs in an OFDM symbol.
NOTE 2: Void.
NOTE 3: PRS bandwidth is as indicated in *prs-Bandwidth* in the OTDOA or DL-AoD assistance data defined in [34].
NOTE 4: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth ≥ [24] RB.
NOTE 5: The serving cell, the reference cell, and the measured neighbour cell i are on the same carrier frequency.
NOTE 6: The condition level is increased by Δ>0, when applicable, as described in Sections B.3.2 and B.3.3.
NOTE 7: The Io is defined in PRS positioning subframes. The same Io range applies to PRS and non-PRS symbols. Io levels are different in PRS and non-PRS symbols within the same subframe.
NOTE 8: NR operating band groups are as defined in Section 3.5.2.

Table 10.1.38.2.1-4: PRS-RSRPP absolute accuracy for FR2 for reduced number of samples

Accuracy	Conditions

Normal condition	Extreme condition	PRS Ês/Iot	PRS BW	Repetition factor ($T_{rep}^{PRS} * L_{PRS} / K_{comb}^{PRS}$)	Io Note 7 range	
					Minimum Io Note 1 dBm / SCS_{PRS}	Maximum Io
dB	dB	dB	PRB	-	dBm / SCS_{PRS}	dBm/$BW_{Channel}$
					dBm/120kHz Note 6 / dBm/60kHz Note 6	
TBD	TBD	≥0	≥48	All	Same value as PRP in Table B.2.X-2, according to UE Power class, operating band and angle of arrival	-50
					Note 4	
					Note 4	
±TBD	±TBD	≥-6	48 ≤ BW ≤ 64	All	Note 4	
±TBD	±TBD		BW >64	All	Note 4	

NOTE 1: This minimum Io condition is expressed as the average Io per RE over all REs in an OFDM symbol.
NOTE 2: Void.
NOTE 3: PRS bandwidth is as indicated in *prs-Bandwidth* in the OTDOA or DL-AoD assistance data defined in [34].
NOTE 4: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth ≥ [24] RB.
NOTE 5: The serving cell, the reference cell, and the measured neighbour cell i are on the same carrier frequency.
NOTE 6: The condition level is increased by Δ>0, when applicable, as described in Sections B.3.2 and B.3.3.
NOTE 7: The Io is defined in PRS positioning subframes. The same Io range applies to PRS and non-PRS symbols. Io levels are different in PRS and non-PRS symbols within the same subframe.
NOTE 8: NR operating band groups are as defined in Section 3.5.2.

10.1.38.3 Report mapping

10.1.38.3.1 Absolute PRS-RSRPP Measurement Report Mapping

The reporting range of absolute PRS-RSRPP measurement is defined from -156 dBm to -31 dBm with 1 dB resolution.

The mapping of measured quantity is defined in Table 10.1.38.3.1-1. The range in the signalling may be larger than the guaranteed accuracy range.

The UE capable of *additionalPathsExtSupport-r17* can report the PRS-RSRPP measurement of up to its supported number of additional paths.

Table 10.1.38.3.1-1: Measurement report mapping for PRS-RSRPP

Reported value	Measured quantity value	Unit
PRS_RSRPP_0	PRS-RSRPP<-156	dBm
PRS_RSRPP_1	-156≤PRS-RSRPP<-155	dBm
PRS_RSRPP_2	-155≤PRS-RSRPP<-154	dBm
PRS_RSRPP_3	-154≤PRS-RSRPP<-153	dBm
PRS_RSRPP_4	-153≤PRS-RSRPP<-152	dBm
PRS_RSRPP_5	-152≤PRS-RSRPP<-151	dBm
PRS_RSRPP_6	-151≤PRS-RSRPP<-150	dBm
PRS_RSRPP_7	-150≤PRS-RSRPP<-149	dBm
PRS_RSRPP_8	-149≤PRS-RSRPP<-148	dBm
PRS_RSRPP_9	-148≤PRS-RSRPP<-147	dBm
PRS_RSRPP_10	-147≤PRS-RSRPP<-146	dBm

PRS_RSRPP_11	-146≤PRS-RSRPP<-145	dBm
PRS_RSRPP_12	-145≤PRS-RSRPP<-144	dBm
PRS_RSRPP_13	-144≤PRS-RSRPP<-143	dBm
PRS_RSRPP_14	-143≤PRS-RSRPP<-142	dBm
PRS_RSRPP_15	-142≤PRS-RSRPP<-141	dBm
PRS_RSRPP_16	-141≤PRS-RSRPP<-140	dBm
PRS_RSRPP_17	-140≤PRS-RSRPP<-139	dBm
PRS_RSRPP_18	-139≤PRS-RSRPP<-138	dBm
…	…	…
PRS_RSRPP_111	-46≤PRS-RSRPP<-45	dBm
PRS_RSRPP_112	-45≤PRS-RSRPP<-44	dBm
PRS_RSRPP_113	-44≤PRS-RSRPP<-43	dBm
PRS_RSRPP_114	-43≤PRS-RSRPP<-42	dBm
PRS_RSRPP_115	-42≤PRS-RSRPP<-41	dBm
PRS_RSRPP_116	-41≤PRS-RSRPP<-40	dBm
PRS_RSRPP_117	-40≤PRS-RSRPP<-39	dBm
PRS_RSRPP_118	-39≤PRS-RSRPP<-38	dBm
PRS_RSRPP_119	-38≤PRS-RSRPP<-37	dBm
PRS_RSRPP_120	-37≤PRS-RSRPP<-36	dBm
PRS_RSRPP_121	-36≤PRS-RSRPP<-35	dBm
PRS_RSRPP_122	-35≤PRS-RSRPP<-34	dBm
PRS_RSRPP_123	-34≤PRS-RSRPP<-33	dBm
PRS_RSRPP_124	-33≤PRS-RSRPP<-32	dBm
PRS_RSRPP_125	-32≤PRS-RSRPP<-31	dBm
PRS_RSRPP_126	-31≤PRS-RSRPP	dBm

10.1.38.3.2 Differential Report Mapping for PRS-RSRPP Measurement

The reporting range of differential PRS-RSRPP is defined from -30 dB to 0 dB with 1 dB resolution when *nr-DL-AoD-RequestLocationInformation* message is received.

The mapping of measured quantity is defined in Table 10.1.38.3.2-1. The range in the signalling may be larger than the guaranteed accuracy range.

For differential reporting, PRS-RSRPP is reported as the difference in dB with respect to the first reported PRS-RSRPP.

Table 10.1.38.3.2-1: Measurement report mapping for differential PRS-RSRPP

Reported value	Measured quantity value	Unit
DIFFRSRPP_0	-30≥ΔRSRPP	dB
DIFFRSRPP_1	-29≥ΔRSRPP>-30	dB
DIFFRSRPP_2	-28≥ΔRSRPP>-29	dB
DIFFRSRPP_3	-27≥ΔRSRPP>-28	dB
DIFFRSRPP_4	-26≥ΔRSRPP>-27	dB
DIFFRSRPP_5	-25≥ΔRSRPP>-26	dB
DIFFRSRPP_6	-24≥ΔRSRPP>-25	dB
DIFFRSRPP_7	-23≥ΔRSRPP>-24	dB
DIFFRSRPP_8	-22≥ΔRSRPP>-23	dB

DIFFRSRPP_9	-21≤ΔRSRPP>-22	dB
DIFFRSRPP_10	-20≤ΔRSRPP>-21	dB
DIFFRSRPP_11	-19≤ΔRSRPP>-20	dB
DIFFRSRPP_12	-18≤ΔRSRPP>-19	dB
DIFFRSRPP_13	-17≤ΔRSRPP>-18	dB
DIFFRSRPP_14	-16≤ΔRSRPP>-17	dB
DIFFRSRPP_15	-15≤ΔRSRPP>-16	dB
DIFFRSRPP_16	-14≤ΔRSRPP>-15	dB
DIFFRSRPP_17	-13≤ΔRSRPP>-14	dB
DIFFRSRPP_18	-12≤ΔRSRPP>-13	dB
DIFFRSRPP_19	-11≤ΔRSRPP>-12	dB
DIFFRSRPP_20	-10≤ΔRSRPP>-11	dB
DIFFRSRPP_21	-9≤ΔRSRPP>-10	dB
DIFFRSRPP_22	-8≤ΔRSRPP>-9	dB
DIFFRSRPP_23	-7≤ΔRSRPP>-8	dB
DIFFRSRPP_24	-6≤ΔRSRPP>-7	dB
DIFFRSRPP_25	-5≤ΔRSRPP>-6	dB
DIFFRSRPP_26	-4≤ΔRSRPP>-5	dB
DIFFRSRPP_27	-3≤ΔRSRPP>-4	dB
DIFFRSRPP_28	-2≤ΔRSRPP>-3	dB
DIFFRSRPP_29	-1≤ΔRSRPP>-2	dB
DIFFRSRPP_30	0≤ΔRSRPP>-1	dB

10.1.39 UE Rx-Tx time difference measurements for RTT-based PDC

10.1.39.1 *Introduction*

Editors note: This is to capture the applicability of the requirements in this section

10.1.39.2 *Measurement Accuracy Requirements for PRS*

The error in the reported value of UE Rx-Tx time difference measurement, including both the measurement error and the reporting quantization error, should be within the accuracy requirements specified in this clause.

The UE Rx-Tx time difference measurement accuracy requirements in this clause shall not apply, if:

- N_{TA_offset} defined in Table 7.1.2-2 changes during the UE Rx-Tx measurement period or
- if the uplink transmission timing changes during the UE Rx-Tx measurement period due to the network-configured Timing Advance.

The UE Rx-Tx time difference measurement accuracy requirements in this clause shall apply provided that:

- The UE transmits SRS within [-160, 160] msec of at least one PDC DL PRS resource from the serving cell (PCell).

When a serving cell change occurs during the UE Rx-Tx measurement period, the UE Rx-Tx time difference measurement accuracy requirements in this clause shall apply provided that the serving cell change does not impact SRS configuration for the UE Rx-Tx measurement.

The accuracy requirements in Table 10.1.39.2-1 for FR1 are valid under the following conditions:

Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.

$PRP|_{dBm}$ according to Annex [TBD] for a corresponding Band.

AWGN propagation condition.

Table 10.1.39.2-1: UE Rx-Tx time difference measurement accuracy in FR1 in AWGN

Accuracy	Conditions						
	PRS Ês/Iot	Minimum PRS bandwidth	PRS SCS	PRS resource repetition ($T_{rep}^{PRS} * L_{PRS}/K_{comb}^{PRS}$ Note 3	NR operating band groups Note 2	Io Note 4 range	
						Minimum Io Note 1	Maximum Io
Tc Note 5	dB	RB	kHz			dBm / SCS_{PRS}	dBm/BW
± [78+δ+ε]	-3	≥[24]	15	≥[4]	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-50
					NR_FDD_FR1_B	-120.5	
					NR_TDD_FR1_C	-120	
					NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	
					NR_FDD_FR1_E, NR_TDD_FR1_E	-119	
					NR_FDD_FR1_F	-118.5	
					NR_FDD_FR1_G	-118	
					NR_FDD_FR1_H	-117.5	
± [59+δ+ε]		≥[52]		≥[1]	Note 6	NOTE 6	NOTE 6
± [30+δ+ε]		>[104]		≥[1]	Note 6	NOTE 6	NOTE 6
± [57+δ+ε]		≥[24]	30	≥[4]	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-118	-50
					NR_FDD_FR1_B	-117.5	
					NR_TDD_FR1_C	-117	
					NR_FDD_FR1_D, NR_TDD_FR1_D	-116.5	
					NR_FDD_FR1_E, NR_TDD_FR1_E	-116	
					NR_FDD_FR1_F	-115.5	
					NR_FDD_FR1_G	-115	
					NR_FDD_FR1_H	-114.5	
± [30+δ+ε]		≥[48]		≥[1]	NOTE 6	NOTE 6	NOTE 6
± [15+δ+ε]		≥[132]		≥[1]	NOTE 6	NOTE 6	NOTE 6
± [29+δ+ε]		≥[24]	60	≥[4]	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-115	-50
					NR_FDD_FR1_B	-114.5	
					NR_TDD_FR1_C	-114	
					NR_FDD_FR1_D, NR_TDD_FR1_D	-113.5	
					NR_FDD_FR1_E, NR_TDD_FR1_E	-113	
					NR_FDD_FR1_F	-113.5	
					NR_FDD_FR1_G	-113	
					NR_FDD_FR1_H	-111.5	
± [15+δ+ε]		≥[64]		≥[1]	NOTE 6	NOTE 6	NOTE 6
± [7+δ+ε]		≥[132]		≥[1]	NOTE 6	NOTE 6	NOTE 6

NOTE 1: This minimum Io condition is expressed as the average Io per RE over all REs in an OFDM symbol.
NOTE 2: NR operating band groups are as defined in Section 3.5.
NOTE 3: T_{rep}^{PRS}, L_{PRS}, K_{comb}^{PRS} are configured by higher layer parameter *dl-PRS-ResourceRepetitionFactor, dl-PRS-NumSymbols and dl-PRS-CombSizeN*defined in TS 37.355 [34].
NOTE 4: The Io is defined in PRS slots. The same Io range applies to PRS and non-PRS symbols. Io levels are different in PRS and non-PRS symbols within the same slot.
NOTE 5: Tc is the basic timing unit defined in TS 38.211 [6].
NOTE 6: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth of the smallest RB number for the corresponding SCS.

NOTE 7: δ is the margin determined from Table 10.1.39.2-3.
NOTE 8: ε is the margin for reporting quantitization error and ε=16 Tc.

The accuracy requirements in Table 10.1.39.2-2 for FR2 are valid under the following conditions:

Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.

PRP|$_{dBm}$ according to Annex [TBD] for a corresponding Band.

AWGN propagation condition.

Table 10.1.39.2-2: UE Rx-Tx time difference measurement accuracy in FR2 in AWGN

Accuracy	Conditions					
	PRS Ês/Iot	Minimum PRS bandwidth	PRS SCS	PRS resource repetition $(T_{rep}^{PRS} * L_{PRS} / K_{comb}^{PRS}$ Note 3	Io Note 4 range	
					Minimum Io Note 1	Maximum Io
Tc Note 5	dB	RB	kHz		dBm / SCS_{PRS}	dBm/$BW_{Channel}$
± [22+δ+ε]	-3	≥[24]	60	≥[1]	Same value as PRP in Table B.2.14-2, according to UE Power class, operating band and angle of arrival	-50
± [15+δ+ε]		≥[64]		≥[1]	NOTE 6	NOTE 6
± [7+δ+ε]		≥[132]		≥[1]	NOTE 6	NOTE 6
± [12+δ+ε]		≥[32]	120	≥[1]	Same value as PRP in Table B.2.14-2, according to UE Power class, operating band and angle of arrival	-50
± [7+δ+ε]		≥[64]		≥[1]	NOTE 6	NOTE 6
± [4+δ+ε]		≥[128]		≥[1]	NOTE 6	NOTE 6

NOTE 1: This minimum Io condition is expressed as the average Io per RE over all REs in an OFDM symbol.
NOTE 2: NR operating band groups are as defined in Section 3.5.
NOTE 3: T_{rep}^{PRS}, L_{PRS}, K_{comb}^{PRS} are configured by higher layer parameter dl-PRS-ResourceRepetitionFactor, dl-PRS-NumSymbols and dl-PRS-CombSizeNdefined in TS 37.355 [34].
NOTE 4: The Io is defined in PRS slots. The same Io range applies to PRS and non-PRS symbols. Io levels are different in PRS and non-PRS symbols within the same slot.
NOTE 5: Tc is the basic timing unit defined in TS 38.211 [6].
NOTE 6: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth of the smallest RB number for the corresponding SCS.
NOTE 7: δ is the margin determined from Table 10.1.39.2-4.
NOTE 8: ε is the margin for reporting quantitization error and ε=16 Tc.

Table 10.1.39.2-3: Margin for UE Rx-Tx time difference measurement accuracy in FR1

Min(PRS BW, SRS BW) (RB)			Margin (Tc Note 1)
SCS = 15 kHz	SCS = 30 kHz	SCS = 60 kHz	
≥ 24	N/A	N/A	[160]
≥ 52	≥ 24	N/A	[80]
≥ 104	≥ 48	≥ 24	[56]
N/A	≥ 132	≥ 64	[24]
N/A	N/A	≥ 132	[24]

NOTE 1: Tc is the basic timing unit defined in TS 38.211 [6].
NOTE 2: If SRS and PRS have different SCS, the margin corresponding to the smallest RS BW in MHz applies.

Table 10.1.39.2-4: Margin for UE Rx-Tx time difference measurement accuracy in FR2

Min(PRS BW, SRS BW) (MHz)		Margin (Tc Note 1)
SCS = 60 kHz	SCS = 120 kHz	
≥ 24	N/A	[76]
≥ 64	≥ 32	[32]

≥ 132	≥ 64	[24]
N/A	≥ 128	[20]
NOTE 1: Tc is the basic timing unit defined in TS 38.211 [6]. NOTE 2: If SRS and PRS have different SCS, the margin corresponding to the smallest RS BW in MHz applies.		

10.1.39.3 Measurement Accuracy Requirements for TRS

The error in the reported value of UE Rx-Tx time difference measurement, including both the measurement error and the reporting quantization error, should be within the accuracy requirements specified in this clause.

The UE Rx-Tx time difference measurement accuracy requirements in this clause shall not apply, if:

- N_{TA_offset} defined in Table 7.1.2-2 changes during the UE Rx-Tx measurement period or
- if the uplink transmission timing changes during the UE Rx-Tx measurement period due to the network-configured Timing Advance.

The UE Rx-Tx time difference measurement accuracy requirements in this clause shall apply provided that:

- The UE transmits SRS within [-160, 160] msec of at least one PDC TRS resource from the serving cell (PCell).

When a serving cell change occurs during the UE Rx-Tx measurement period, the UE Rx-Tx time difference measurement accuracy requirements in this clause shall apply provided that the serving cell change does not impact SRS configuration for the UE Rx-Tx measurement.

The accuracy requirements in Table 10.1.39.3-1 for FR1 are valid under the following conditions:

Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.

$PRP|_{dBm}$ according to Annex [TBD] for a corresponding Band.

AWGN propagation condition.

Table 10.1.39.3-1: UE Rx-Tx time difference measurement accuracy in FR1 in AWGN

Accuracy	Conditions					
	TRS Ês/Iot	Minimum TRS bandwidth	TRS SCS	NR operating band groups[Note 2]	Io[Note 3] range	
					Minimum Io[Note 1]	Maximum Io
Tc[Note 4]	dB	RB	kHz		dBm / SCS_{TRS}	dBm/BW
[116+δ+ε]	-3	≥[24]	15	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-50
				NR_FDD_FR1_B	-120.5	
				NR_TDD_FR1_C	-120	
				NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	
				NR_FDD_FR1_E, NR_TDD_FR1_E	-119	
				NR_FDD_FR1_F	-118.5	
				NR_FDD_FR1_G	-118	
				NR_FDD_FR1_H	-117.5	
[60+δ+ε]		≥[52]		Note 5	NOTE 5	NOTE 5
[29+δ+ε]		>[104]		Note 5	NOTE 5	NOTE 5
[56+δ+ε]		≥[24]	30	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-118	-50
				NR_FDD_FR1_B	-117.5	
				NR_TDD_FR1_C	-117	
				NR_FDD_FR1_D, NR_TDD_FR1_D	-116.5	
				NR_FDD_FR1_E, NR_TDD_FR1_E	-116	

				NR_FDD_FR1_F	-115.5	
				NR_FDD_FR1_G	-115	
				NR_FDD_FR1_H	-114.5	
[29+δ+ε]		≥[48]		NOTE 5	NOTE 5	NOTE 5
[15+δ+ε]		≥[132]		NOTE 5	NOTE 5	NOTE 5
[29+δ+ε]		≥[24]	60	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-115	-50
				NR_FDD_FR1_B	-114.5	
				NR_TDD_FR1_C	-114	
				NR_FDD_FR1_D, NR_TDD_FR1_D	-113.5	
				NR_FDD_FR1_E, NR_TDD_FR1_E	-113	
				NR_FDD_FR1_F	-113.5	
				NR_FDD_FR1_G	-113	
				NR_FDD_FR1_H	-111.5	
[14+δ+ε]		≥[64]		NOTE 5	NOTE 5	NOTE 5
[7+δ+ε]		≥[132]		NOTE 5	NOTE 5	NOTE 5

NOTE 1: This minimum Io condition is expressed as the average Io per RE over all REs in an OFDM symbol.
NOTE 2: NR operating band groups are as defined in Section 3.5.
NOTE 3: The Io is defined in TRS slots. The same Io range applies to TRS and non-TRS symbols. Io levels are different in TRS and non-TRS symbols within the same slot.
NOTE 4: Tc is the basic timing unit defined in TS 38.211 [6].
NOTE 5: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding requirement with the TRS bandwidth of the smallest RB number for the corresponding SCS.
NOTE 6: δ is the margin determined from Table 10.1.39.3-3.
NOTE 7: ε is the margin for reporting quantitization error and $\varepsilon = 16\ Tc$.

The accuracy requirements in Table 10.1.39.3-2 for FR2 are valid under the following conditions:

Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.

$PRP|_{dBm}$ according to Annex [TBD] for a corresponding Band.

AWGN propagation condition.

Table 10.1.39.3-2: UE Rx-Tx time difference measurement accuracy in FR2 in AWGN

Accuracy	Conditions				
	TRS Ês/Iot	Minimum TRS bandwidth	TRS SCS	Io[Note 3] range	
				Minimum Io[Note 1]	Maximum Io
Tc[Note 4]	dB	RB	kHz	dBm / SCS_{TRS}	$dBm/BW_{Channel}$
[29+δ+ε]	-3	≥[24]	60	Same value as PRP in Table B.2.14-2, according to UE Power class, operating band and angle of arrival	-50
[14+δ+ε]		≥[64]		NOTE 5	NOTE 5
[7+δ+ε]		≥[132]		NOTE 5	NOTE 5
[15+δ+ε]		≥[32]	120	Same value as PRP in Table B.2.14-2, according to UE Power class, operating band and angle of arrival	-50
[7+δ+ε]		≥[64]		NOTE 5	NOTE 5
[4+δ+ε]		≥[128]		NOTE 5	NOTE 5

NOTE 1: This minimum Io condition is expressed as the average Io per RE over all REs in an OFDM symbol.
NOTE 2: NR operating band groups are as defined in Section 3.5.
NOTE 3: The Io is defined in TRS slots. The same Io range applies to TRS and non-TRS symbols. Io levels are different in TRS and non-TRS symbols within the same slot.
NOTE 4: Tc is the basic timing unit defined in TS 38.211 [6].

NOTE 5: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding requirement with the TRS bandwidth of the smallest RB number for the corresponding SCS.
NOTE 6: δ is the margin determined from Table 10.1.39.3-4.
NOTE 7: ε is the margin for reporting quantitization error and ε=16 Tc.

Table 10.1.39.3-3: Margin for UE Rx-Tx time difference measurement accuracy in FR1

Min(TRS BW, SRS BW) (RB)			Margin (Tc [Note 1])
SCS = 15 kHz	SCS = 30 kHz	SCS = 60 kHz	
≥ 24	N/A	N/A	[160]
≥ 52	≥ 24	N/A	[80]
≥ 104	≥ 48	≥ 24	[56]
N/A	≥ 132	≥ 64	[24]
N/A	N/A	≥ 132	[24]
NOTE 1: Tc is the basic timing unit defined in TS 38.211 [6]. NOTE 2: If SRS and TRS have different SCS, the margin corresponding to the smallest RS BW in MHz applies.			

Table 10.1.39.3-4: Margin for UE Rx-Tx time difference measurement accuracy in FR2

Min(TRS BW, SRS BW) (MHz)		Margin (Tc [Note 1])
SCS = 60 kHz	SCS = 120 kHz	
≥ 24	N/A	[76]
≥ 64	≥ 32	[32]
≥ 132	≥ 64	[24]
N/A	≥ 128	[20]
NOTE 1: Tc is the basic timing unit defined in TS 38.211 [6]. NOTE 2: If SRS and TRS have different SCS, the margin corresponding to the smallest RS BW in MHz applies.		

10.1.40 Measurement Accuracy Requirements for Propagation Delay Compensation

10.1.40.1 Measurement Accuracy Requirements for PRS

The error in the reported value of UE Rx-Tx time difference measurement, including both the measurement error and the reporting quantization error, should be within the accuracy requirements specified in this clause.

The accuracy requirements in Table 10.1.40.1-1 for FR1 are valid under the following conditions:

Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.

$PRP|_{dBm}$ according to Annex [TBD] for a corresponding Band.

AWGN propagation condition.

Table 10.1.40.1-1: UE Rx-Tx time difference measurement accuracy in FR1 in AWGN

Accuracy	Conditions						
	PRS Ês/Iot	Minimum PRS bandwidth	PRS SCS	PRS resource repetition ($T_{rep}^{PRS} * L_{PRS}/K_{comb}^{PRS}$ Note 3)	NR operating band groups[Note 2]	Io[Note 4] range	
						Minimum Io[Note 1]	Maximum Io
Tc[Note 5]	dB	RB	kHz			dBm / SCS_{PRS}	dBm/BW
± [78+δ+ε]	-3	≥[24]	15	≥[4]	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-50
					NR_FDD_FR1_B	-120.5	

					NR_TDD_FR1_C	-120	
					NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	
					NR_FDD_FR1_E, NR_TDD_FR1_E	-119	
					NR_FDD_FR1_F	-118.5	
					NR_FDD_FR1_G	-118	
					NR_FDD_FR1_H	-117.5	
± [59+δ+ε]		≥[52]		≥[1]	Note 6	NOTE 6	NOTE 6
± [30+δ+ε]		>[104]		≥[1]	Note 6	NOTE 6	NOTE 6
± [57+δ+ε]		≥[24]	30	≥[4]	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-118	-50
					NR_FDD_FR1_B	-117.5	
					NR_TDD_FR1_C	-117	
					NR_FDD_FR1_D, NR_TDD_FR1_D	-116.5	
					NR_FDD_FR1_E, NR_TDD_FR1_E	-116	
					NR_FDD_FR1_F	-115.5	
					NR_FDD_FR1_G	-115	
					NR_FDD_FR1_H	-114.5	
± [30+δ+ε]		≥[48]		≥[1]	NOTE 6	NOTE 6	NOTE 6
± [15+δ+ε]		≥[132]		≥[1]	NOTE 6	NOTE 6	NOTE 6
± [29+δ+ε]		≥[24]	60	≥[4]	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-115	-50
					NR_FDD_FR1_B	-114.5	
					NR_TDD_FR1_C	-114	
					NR_FDD_FR1_D, NR_TDD_FR1_D	-113.5	
					NR_FDD_FR1_E, NR_TDD_FR1_E	-113	
					NR_FDD_FR1_F	-113.5	
					NR_FDD_FR1_G	-113	
					NR_FDD_FR1_H	-111.5	
± [15+δ+ε]		≥[64]		≥[1]	NOTE 6	NOTE 6	NOTE 6
± [7+δ+ε]		≥[132]		≥[1]	NOTE 6	NOTE 6	NOTE 6

NOTE 1: This minimum Io condition is expressed as the average Io per RE over all REs in an OFDM symbol.
NOTE 2: NR operating band groups are as defined in Section 3.5.
NOTE 3: $T_{\text{rep}}^{\text{PRS}}$, L_{PRS}, $K_{\text{comb}}^{\text{PRS}}$ are configured by higher layer parameter *dl-PRS-ResourceRepetitionFactor, dl-PRS-NumSymbols and dl-PRS-CombSizeN*defined in TS 37.355 [34].
NOTE 4: The Io is defined in PRS slots. The same Io range applies to PRS and non-PRS symbols. Io levels are different in PRS and non-PRS symbols within the same slot.
NOTE 5: Tc is the basic timing unit defined in TS 38.211 [6].
NOTE 6: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth of the smallest RB number for the corresponding SCS.
NOTE 7: δ is the margin determined from Table 10.1.40.1-3.
NOTE 8: ε is the margin for reporting quantitization error and ε=16 Tc.

The accuracy requirements in Table 10.1.40.1-2 for FR2 are valid under the following conditions:

Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.

$PRP|_{dBm}$ according to Annex [TBD] for a corresponding Band.

AWGN propagation condition.

Table 10.1.40.1-2: UE Rx-Tx time difference measurement accuracy in FR2 in AWGN

Accuracy	Conditions				
					Io[Note 4] range

	PRS Ês/Iot	Minimum PRS bandwidth	PRS SCS	PRS resource repetition $(T_{rep}^{PRS} * L_{PRS}/K_{comb}^{PRS}$ Note 3	Minimum Io Note 1	Maximum Io
Tc Note 5	dB	RB	kHz		dBm / SCS_{PRS}	dBm/$BW_{Channel}$
± [22+δ+ε]	-3	≥[24]	60	≥[1]	Same value as PRP in Table B.2.14-2, according to UE Power class, operating band and angle of arrival	-50
± [15+δ+ε]		≥[64]		≥[1]	NOTE 6	NOTE 6
± [7+δ+ε]		≥[132]		≥[1]	NOTE 6	NOTE 6
± [12+δ+ε]		≥[32]	120	≥[1]	Same value as PRP in Table B.2.14-2, according to UE Power class, operating band and angle of arrival	-50
± [7+δ+ε]		≥[64]		≥[1]	NOTE 6	NOTE 6
± [4+δ+ε]		≥[128]		≥[1]	NOTE 6	NOTE 6

NOTE 1: This minimum Io condition is expressed as the average Io per RE over all REs in an OFDM symbol.
NOTE 2: NR operating band groups are as defined in Section 3.5.
NOTE 3: T_{rep}^{PRS}, L_{PRS} , K_{comb}^{PRS} are configured by higher layer parameter dl-PRS-ResourceRepetitionFactor, dl-PRS-NumSymbols and dl-PRS-CombSizeNdefined in TS 37.355 [34].
NOTE 4: The Io is defined in PRS slots. The same Io range applies to PRS and non-PRS symbols. Io levels are different in PRS and non-PRS symbols within the same slot.
NOTE 5: Tc is the basic timing unit defined in TS 38.211 [6].
NOTE 6: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth of the smallest RB number for the corresponding SCS.
NOTE 7: δ is the margin determined from Table 10.1.40.1-4.
NOTE 8: ε is the margin for reporting quantitization error and ε=16 Tc.

Table 10.1.40.1-3: Margin for UE Rx-Tx time difference measurement accuracy in FR1

Min(PRS BW, SRS BW) (RB)			Margin (Tc Note 1)
SCS = 15 kHz	SCS = 30 kHz	SCS = 60 kHz	
≥ 24	N/A	N/A	[160]
≥ 52	≥ 24	N/A	[80]
≥ 104	≥ 48	≥ 24	[56]
N/A	≥ 132	≥ 64	[24]
N/A	N/A	≥ 132	[24]

NOTE 1: Tc is the basic timing unit defined in TS 38.211 [6].
NOTE 2: If SRS and PRS have different SCS, the margin corresponding to the smallest RS BW in MHz applies.

Table 10.1.40.1-4: Margin for UE Rx-Tx time difference measurement accuracy in FR2

Min(PRS BW, SRS BW) (MHz)		Margin (Tc Note 1)
SCS = 60 kHz	SCS = 120 kHz	
≥ 24	N/A	[76]
≥ 64	≥ 32	[32]
≥ 132	≥ 64	[24]
N/A	≥ 128	[20]

NOTE 1: Tc is the basic timing unit defined in TS 38.211 [6].
NOTE 2: If SRS and PRS have different SCS, the margin corresponding to the smallest RS BW in MHz applies.

Editor's Note: FFS whether and which applicability conditions from clause 10.1.25.2 should be ad*ded.*

10.1.40.2 Measurement Accuracy Requirements for TRS

The error in the reported value of UE Rx-Tx time difference measurement, including both the measurement error and the reporting quantization error, should be within the accuracy requirements specified in this clause.

The accuracy requirements in Table 10.1.40.2-1 for FR1 are valid under the following conditions:

Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.

$PRP|_{dBm}$ according to Annex [TBD] for a corresponding Band.

AWGN propagation condition.

Table 10.1.40.2-1: UE Rx-Tx time difference measurement accuracy in FR1 in AWGN

Accuracy	Conditions					
	TRS Ês/Iot	Minimum TRS bandwidth	TRS SCS	NR operating band groups[Note 2]	Io[Note 3] range	
					Minimum Io[Note 1]	Maximum Io
Tc[Note 4]	dB	RB	kHz		dBm / SCS_{TRS}	dBm/BW
[TBD+δ+ε]	-3	≥[24]	15	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-50
				NR_FDD_FR1_B	-120.5	
				NR_TDD_FR1_C	-120	
				NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	
				NR_FDD_FR1_E, NR_TDD_FR1_E	-119	
				NR_FDD_FR1_F	-118.5	
				NR_FDD_FR1_G	-118	
				NR_FDD_FR1_H	-117.5	
[TBD+δ+ε]		≥[52]		Note 5	NOTE 5	NOTE 5
[TBD+δ+ε]		>[104]		Note 5	NOTE 5	NOTE 5
[TBD+δ+ε]		≥[24]	30	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-118	-50
				NR_FDD_FR1_B	-117.5	
				NR_TDD_FR1_C	-117	
				NR_FDD_FR1_D, NR_TDD_FR1_D	-116.5	
				NR_FDD_FR1_E, NR_TDD_FR1_E	-116	
				NR_FDD_FR1_F	-115.5	
				NR_FDD_FR1_G	-115	
				NR_FDD_FR1_H	-114.5	
[TBD+δ+ε]		≥[48]		NOTE 5	NOTE 5	NOTE 5
[TBD+δ+ε]		≥[132]		NOTE 5	NOTE 5	NOTE 5
[TBD+δ+ε]		≥[24]	60	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-115	-50
				NR_FDD_FR1_B	-114.5	
				NR_TDD_FR1_C	-114	
				NR_FDD_FR1_D, NR_TDD_FR1_D	-113.5	
				NR_FDD_FR1_E, NR_TDD_FR1_E	-113	
				NR_FDD_FR1_F	-113.5	
				NR_FDD_FR1_G	-113	
				NR_FDD_FR1_H	-111.5	
[TBD+δ+ε]		≥[64]		NOTE 5	NOTE 5	NOTE 5
[TBD+δ+ε]		≥[132]		NOTE 5	NOTE 5	NOTE 5

NOTE 1: This minimum Io condition is expressed as the average Io per RE over all REs in an OFDM symbol.
NOTE 2: NR operating band groups are as defined in Section 3.5.
NOTE 3: The Io is defined in TRS slots. The same Io range applies to TRS and non-TRS symbols. Io levels are different in TRS and non-TRS symbols within the same slot.
NOTE 4: Tc is the basic timing unit defined in TS 38.211 [6].

NOTE 5: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding requirement with the TRS bandwidth of the smallest RB number for the corresponding SCS.
NOTE 6: δ is the margin determined from Table 10.1.40.2-3.
NOTE 7: ε is the margin for reporting quantitization error and ε=16 Tc.

The accuracy requirements in Table 10.1.40.2-2 for FR2 are valid under the following conditions:

Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.

$PRP|_{dBm}$ according to Annex [TBD] for a corresponding Band.

AWGN propagation condition.

Table 10.1.40.2-2: UE Rx-Tx time difference measurement accuracy in FR2 in AWGN

Accuracy	Conditions				
	TRS Ês/Iot	Minimum TRS bandwidth	TRS SCS	Io[Note 3] range	
				Minimum Io[Note 1]	Maximum Io
Tc[Note 4]	dB	RB	kHz	dBm / SCS_{TRS}	$dBm/BW_{Channel}$
[TBD+δ+ε]	-3	≥[24]	60	Same value as PRP in Table B.2.14-2, according to UE Power class, operating band and angle of arrival	-50
[TBD+δ+ε]		≥[64]		NOTE 5	NOTE 5
[TBD+δ+ε]		≥[132]		NOTE 5	NOTE 5
[TBD+δ+ε]		≥[32]	120	Same value as PRP in Table B.2.14-2, according to UE Power class, operating band and angle of arrival	-50
[TBD+δ+ε]		≥[64]		NOTE 5	NOTE 5
[TBD+δ+ε]		≥[128]		NOTE 5	NOTE 5

NOTE 1: This minimum Io condition is expressed as the average Io per RE over all REs in an OFDM symbol.
NOTE 2: NR operating band groups are as defined in Section 3.5.
NOTE 3: The Io is defined in TRS slots. The same Io range applies to TRS and non-TRS symbols. Io levels are different in TRS and non-TRS symbols within the same slot.
NOTE 4: Tc is the basic timing unit defined in TS 38.211 [6].
NOTE 5: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding requirement with the TRS bandwidth of the smallest RB number for the corresponding SCS.
NOTE 6: δ is the margin determined from Table 10.1.40.2-4.
NOTE 7: ε is the margin for reporting quantitization error and ε=16 Tc.

Table 10.1.40.2-3: Margin for UE Rx-Tx time difference measurement accuracy in FR1

Min(PRS BW, SRS BW) (RB)			Margin (Tc [Note 1])
SCS = 15 kHz	SCS = 30 kHz	SCS = 60 kHz	
≥ 24	N/A	N/A	[160]
≥ 52	≥ 24	N/A	[80]
≥ 104	≥ 48	≥ 24	[56]
N/A	≥ 132	≥ 64	[24]
N/A	N/A	≥ 132	[24]

NOTE 1: Tc is the basic timing unit defined in TS 38.211 [6].
NOTE 2: If SRS and PRS have different SCS, the margin corresponding to the smallest RS BW in MHz applies.

Table 10.1.40.2-4: Margin for UE Rx-Tx time difference measurement accuracy in FR2

Min(PRS BW, SRS BW) (MHz)		Margin (Tc [Note 1])
SCS = 60 kHz	SCS = 120 kHz	

≥ 24	N/A	[76]
≥ 64	≥ 32	[32]
≥ 132	≥ 64	[24]
N/A	≥ 128	[20]
NOTE 1: Tc is the basic timing unit defined in TS 38.211 [6]. NOTE 2: If SRS and PRS have different SCS, the margin corresponding to the smallest RS BW in MHz applies.		

Editor's Note: FFS whether and which applicability conditions from clause 10.1.25.2 should be added

10.1A NR measurements for RedCap

10.1A.1 Introduction

The requirements in this section are applicable for RedCap UE as follows:

- intra-frequency requirements apply for PCell measurements in SA,
- inter-frequency requirements apply for non-serving cell measurements on NR carrier frequencies.
- inter-frequency requirements apply for measurements from one cell on a frequency compared to the measurement from another cell on a different frequency.

The accuracy requirements in this clause are applicable for AWGN radio propagation conditions. The accuracy requirements of RSRP, RSRQ amd SINR are applicable provided that reference SSB is not changed during measurement period.

10.1A.2 Intra-frequency RSRP accuracy requirements for FR1

10.1A.2.1 Intra-frequency SS-RSRP accuracy requirements

10.1A.2.1.1 Absolute SS-RSRP Accuracy

The accuracy requirements in clause 10.1.2.1.1 shall apply when RedCap UE is capable of 2Rx. When UE is only required to support 1RX, the absolute accuracy requirements in Table 10.1A.2.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band for each relevant SSB.

Table 10.1A.2.1.1-1: SS-RSRP Intra frequency absolute accuracy for 1Rx RedCap UE in FR1

Accuracy		**Conditions**					
Normal condition	**Extreme condition**	**SSB Ês/Iot**	**Io [Note 1] range**				
			NR operating band groups [Note 2]	**Minimum Io**			**Maximum Io**
dB	**dB**	**dB**		**dBm / SCS_{SSB}**		**dBm/$BW_{Channel}$**	**dBm/$BW_{Channel}$**
				SCS_{SSB} = 15 kHz	**SCS_{SSB} = 30 kHz**		
±5.5	±10	≥-6	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-70
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-70
			NR_TDD_FR1_C	-120	-117	N/A	-70
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-70

			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-70
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-70
			NR_FDD_FR1_G	-118	-115	N/A	-70
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-70
±9	±12	≥-6	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H	N/A	N/A	-70	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2.							

10.1A.2.1.2 Relative SS-RSRP Accuracy

The accuracy requirements in clause 10.1.2.1.2 shall apply when RedCap UE is capable of 2Rx. When UE is only required to support 1RX, the absolute accuracy requirements in Table 10.1A.2.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band for each relevant SSB.

Table 10.1A.2.1.2-1: SS-RSRP Intra frequency relative accuracy for 1Rx RedCap UE in FR1

Accuracy		**Conditions**					
Normal condition	**Extreme condition**	**SSB Ês/Iot** Note 2	**Io** Note 1 **range**				
			NR operating band groups Note 4	**Minimum Io**			**Maximum Io**
dB	**dB**	**dB**		**dBm / SCS_{SSB}**		**dBm/$BW_{Channel}$**	**dBm/$BW_{Channel}$**
				SCS_{SSB} = 15 kHz	**SCS_{SSB} = 30 kHz**		
±3	±4	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
±4	±4	≥-6	Note 3	Note 3	Note 3	N/A	Note 3
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: The parameter SSB Ês/Iot is the minimum SSB Ês/Iot of the pair of cells to which the requirement applies. NOTE 3: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement. NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.							

10.1A.3 Intra-frequency RSRP accuracy requirements for FR2

10.1A.3.1 Intra-frequency SS-RSRP accuracy requirements

10.1A.3.1.1 Absolute SS-RSRP Accuracy

The accuracy requirements in clause 10.1.3.1.1 shall apply.

10.1A.3.1.2 Relative SS-RSRP Accuracy

The accuracy requirements in clause 10.1.3.1.2 shall apply.

10.1A.4 Inter-frequency RSRP accuracy requirements for FR1

10.1A.4.1 Inter-frequency SS-RSRP accuracy requirements

10.1A.4.1.1 Absolute Accuracy of SS-RSRP in FR1

The accuracy requirements in clause 10.1.4.1.1 shall apply when RedCap UE is capable of 2Rx. When UE is only required to support 1RX, the absolute accuracy requirements in Table 10.1A.4.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant SSB.

Table 10.1A.4.1.1-1: SS-RSRP Inter frequency Absolute accuracy for 1Rx RedCap UE in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB $\hat{E}s/Iot$ Note 2	Io Note 1 range				
			NR operating band groups Note 3	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±5.5	±10	≥-6	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-70
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-70
			NR_TDD_FR1_C	-120	-117	N/A	-70
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-70
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-70
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-70
			NR_FDD_FR1_G	-118	-115	N/A	-70
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-70
±9	±12	≥-6	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F,	N/A	N/A	-70	-50

			NR_FDD_FR1_G, NR_FDD_FR1_H				
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: Void NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2.							

10.1A.4.1.2 Relative Accuracy of SS-RSRP in FR1

The accuracy requirements in clause 10.1.4.1.2 shall apply when RedCap UE is capable of 2Rx. When UE is only required to support 1RX, the absolute accuracy requirements in Table 10.1A.4.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] Clause 7.3 for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant SSB.
- $|SSB_RP1_{dBm} - SSB_RP2_{dBm}| \leq 27$ dB
- |Channel 1_Io -Channel 2_Io | ≤ 20 dB

Table 10.1A.4.1.2-1: SS-RSRP Inter frequency relative accuracy for 1Rx RedCap UE in FR1

Accuracy		**Conditions**					
Normal condition	**Extreme condition**	**SSB Ês/Iot** Note 2	**Io** Note 1 **range**				
			NR operating band groups Note 3	**Minimum Io**			**Maximum Io**
dB	**dB**	**dB**		**dBm / SCS_{SSB}**		**dBm/$BW_{Channel}$**	**dBm/$BW_{Channel}$**
				SCS_{SSB} = 15 kHz	**SCS_{SSB} = 30 kHz**		
±5.5	±7	≥-6	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: The parameter SSB Ês/Iot is the minimum SSB Ês/Iot of the pair of cells to which the requirement applies. NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2.							

10.1A.5 Inter-frequency RSRP accuracy requirements for FR2

10.1A.5.1 Inter-frequency SS-RSRP accuracy requirements

10.1A.5.1.1 Absolute SS-RSRP Accuracy

The accuracy requirements in clause 10.1.5.1.1 shall apply.

10.1A.5.1.2 Relative SS-RSRP Accuracy

The accuracy requirements in clause 10.1.5.1.2 shall apply.

10.1A.6 Intra-frequency RSRQ accuracy requirements for FR1

10.1A.6.1 Intra-frequency SS-RSRQ accuracy requirements in FR1

10.1A.6.1.1 Absolute SS-RSRQ Accuracy in FR1

The accuracy requirements in clause 10.1.7.1.1 shall apply when RedCap UE is capable of 2Rx. When UE is only required to support 1RX, the absolute accuracy requirements in Table 10.1A.6.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band for each relevant SSB.

Table 10.1A.6.1.1-1: SS-RSRQ Intra frequency absolute accuracy for 1Rx RedCap UE in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/Iot	Io [Note 1] range				
			NR operating band groups [Note 3]	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±3.5	±5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
±4.5	±5	≥-6	Note 2	Note 2	Note 2	Note 2	Note 2

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2.

10.1A.7 Intra-frequency RSRQ accuracy requirements for FR2

10.1A.7.1 Intra-frequency SS-RSRQ accuracy requirements in FR2

10.1A.7.1.1 Absolute SS-RSRQ Accuracy in FR2

The accuracy requirements in clause 10.1.8.1.1 shall apply.

10.1A.8 Inter-frequency RSRQ accuracy requirements for FR1

10.1A.8.1 Inter-frequency SS-RSRQ accuracy requirements in FR1

10.1A.8.1.1 Absolute Accuracy of SS-RSRQ in FR1

The accuracy requirements in clause 10.1.9.1.1 shall apply when RedCap UE is capable of 2Rx. When UE is only required to support 1RX, the absolute accuracy requirements in Table 10.1A.8.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant SSB.

Table 10.1A.8.1.1-1: SS-RSRQ Inter frequency absolute accuracy for 1Rx RedCap UE in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/Iot	Io [Note 1] range				
			NR operating band groups [Note 3]	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±3.5	±5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
±4.5	±5	≥-6	Note 2	Note 2	Note 2	Note 2	Note 2

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2.

10.1A.8.1.2 Relative Accuracy of SS-RSRQ in FR1

The accuracy requirements in clause 10.1.9.1.2 shall apply when RedCap UE is capable of 2Rx. When UE is only required to support 1RX, the absolute accuracy requirements in Table 10.1A.8.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant SSB.
- $|SSB_RP1_{dBm} - SSB_RP2_{dBm}| \leq 27$ dB
- $|Channel\ 1_Io - Channel\ 2_Io| \leq 20$ dB

Table 10.1A.8.1.2-1: SS-RSRQ Inter frequency relative accuracy for 1Rx RedCap UE in FR1

Accuracy		Conditions	
Normal condition	Extreme condition	SSB Ês/Iot	Io [Note 1] range

		Note 2	NR operating band groups Note 4	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±4	±5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
±5	±5	≥-6	Note 3	Note 3	Note 3	Note 3	Note 3

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The parameter SSB Ês/Iot is the minimum SSB Ês/Iot of the pair of cells to which the requirement applies.
NOTE 3: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.

10.1A.9 Inter-frequency RSRQ accuracy requirements for FR2

10.1A.9.1 Inter-frequency SS-RSRQ accuracy requirements in FR2

10.1A.9.1.1 Absolute Accuracy of SS-RSRQ in FR2

The accuracy requirements in clause 10.1.10.1.1 shall apply.

10.1A.9.1.2 Relative Accuracy of SS-RSRQ in FR2

The accuracy requirements in clause 10.1.10.1.2 shall apply.

10.1A.10 Intra-frequency SINR accuracy requirements for FR1

10.1A.10.1 Intra-frequency SS-SINR accuracy requirements in FR1

10.1A.10.1.1 Absolute SS-SINR Accuracy in FR1

The accuracy requirements in clause 10.1.12.1.1 shall apply when RedCap UE is capable of 2Rx. When UE is only required to support 1RX, the absolute accuracy requirements in Table 10.1A.10.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band.

Table 10.1A.10.1.1-1: SS-SINR Intra frequency absolute accuracy for 1Rx RedCap UE in FR1

Accuracy		Conditions				
Normal condition	Extreme condition	SSB Ês/Iot Note 3	Io Note 1 range			
			NR operating band groups Note 4	Minimum Io		Maximum Io
dB	dB	dB		dBm / SCS_{SSB}	dBm/$BW_{Channel}$	dBm/$BW_{Channel}$

				SCS_{SSB} = 15 kHz	**SCS_{SSB} = 30 kHz**		
±3.0	±4	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
±3.5	±4	≥-6	Note 2	Note 2	Note 2	Note 2	Note 2

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 3: The requirements apply for SSB Ês/Iot ≤ 25 dB under non-HST scenarios.
NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.
NOTE 5: The requirements apply for SSB Ês/Iot ≤5 dB with SCS 15kHz or 30kHz under NR high speed scenarios.

10.1A.11Intra-frequency SINR accuracy requirements for FR2

10.1A.11.1 Intra-frequency SS-SINR accuracy requirements in FR2

10.1A.11.1.1 Absolute SS-SINR Accuracy in FR2

The accuracy requirements in clause 10.1.13.1.1 shall apply.

10.1A.12 Inter-frequency SINR accuracy requirements for FR1

10.1A.12.1 Inter-frequency SS-SINR accuracy requirements in FR1

10.1A.12.1.1 Aboslute Accuracy of SS-SINR in FR1

The accuracy requirements in clause 10.1.14.1.1 shall apply when RedCap UE is capable of 2Rx. When UE is only required to support 1RX, the absolute accuracy requirements in Table 10.1A.12.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band.

Table 10.1A.12.1.1-1: SS-SINR Inter frequency absolute accuracy for 1Rx RedCap UE in FR1

Accuracy		**Conditions**					
Normal condition	**Extreme condition**	**SSB Ês/Iot** Note 3	**Io** Note 1 **range**				
			NR operating band groups Note 4	**Minimum Io**			**Maximum Io**
dB	**dB**	**dB**		**dBm / SCS_{SSB}**		**$dBm/BW_{Channel}$**	**$dBm/BW_{Channel}$**
				SCS_{SSB} = 15 kHz	**SCS_{SSB} = 30 kHz**		
±4.0	±5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50

			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
±4.5	±5	≥-6	Note 2	Note 2	Note 2	Note 2	Note 2

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 3: The requirements apply for SSB Ês/Iot ≤ 25 dB.
NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.

10.1A.12.1.2 Relative Accuracy of SS-SINR in FR1

The accuracy requirements in clause 10.1.14.1.2 shall apply when RedCap UE is capable of 2Rx. When UE is only required to support 1RX, the absolute accuracy requirements in Table 10.1A.12.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band.
- $|SSB_RP1_{dBm} - SSB_RP2_{dBm}| \leq 27$ dB
- | Channel 1_Io -Channel 2_Io | ≤ 20 dB

Table 10.1A.12.1.2-1: SS-SINR Inter frequency relative accuracy for 1Rx RedCap UE in FR1

Accuracy		**Conditions**					
Normal condition	**Extreme condition**	**SSB Ês/Iot** Note 2,4	**Io** Note 1 **range**				
			NR operating band groups Note 5	**Minimum Io**			**Maximum Io**
dB	**dB**	**dB**		**dBm / SCS_{SSB}**		**dBm/$BW_{Channel}$**	**dBm/$BW_{Channel}$**
				SCS_{SSB} = 120 kHz	**SCS_{SSB} = 240 kHz**		
±4.5	±5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
±5	±5	≥-6	Note 3	Note 3	Note 3	Note 3	Note 3

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The parameter SSB Ês/Iot is the minimum SSB Ês/Iot of the pair of cells to which the requirement applies.
NOTE 3: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 4: The requirements apply for SSB Ês/Iot ≤ [25] dB.
NOTE 5: NR operating band groups in FR1 are as defined in clause 3.5.2.

10.1A.13 Inter-frequency SINR accuracy requirements for FR2

10.1A.13.1 Inter-frequency SS-SINR accuracy requirements in FR2

10.1A.13.1.1 Aboslute Accuracy of SS-SINR in FR2

The accuracy requirements in clause 10.1.15.1.1 shall apply.

10.1A.13.1.2 Relative Accuracy of SS-SINR in FR2

The accuracy requirements in clause 10.1.15.1.1 shall apply.

10.1A.14 L1-RSRP accuracy requirements for FR1

10.1A.14.1 SSB based L1-RSRP accuracy requirements

10.1A.14.1.1 Absolute Accuracy

The accuracy requirements in clause 10.1.19.1.1 shall apply when RedCap UE is capable of 2Rx. When UE is only required to support 1RX, the absolute accuracy requirements in Table 10.1A.14.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.4.1 for a corresponding Band for each relevant SSB.

Table 10.1A.14.1.1-1: SSB based L1-RSRP absolute accuracy for 1Rx RedCap UE in FR1

Accuracy		Conditions				
Normal condition	Extreme condition	SSB Ês/Iot	Io [Note 1] range			
			NR operating band groups [Note 2]	Minimum Io		Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±8.0	±12.5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-70
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-70
			NR_TDD_FR1_C	-120	-117	N/A	-70
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-70
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-70
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-70
			NR_FDD_FR1_G	-118	-115	N/A	-70
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-70
±11.5	±14.5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F,	N/A	N/A	-70	-50

			NR_FDD_FR1_G, NR_FDD_FR1_H,				
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2.							

10.1A.14.1.2 Relative Accuracy

The accuracy requirements in clause 10.1.19.1.2 shall apply when RedCap UE is capable of 2Rx. When UE is only required to support 1RX, the absolute accuracy requirements in Table 10.1A.14.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.4.1 for a corresponding Band for each relevant SSB.

Table 10.1A.14.1.2-1: SSB based L1-RSRP relative accuracy for 1Rx RedCap UE in FR1

Accuracy		**Conditions**					
Normal condition	**Extreme condition**	**SSB $\hat{E}_s/I_{ot}$** Note 2	**Io** Note 1 **range**				
			NR operating band groups Note 4	**Minimum Io**			**Maximum Io**
dB	**dB**	**dB**		**dBm / SCS_{SSB}**		**dBm/$BW_{Channel}$**	**dBm/$BW_{Channel}$**
				SCS_{SSB} = 15 kHz	**SCS_{SSB} = 30 kHz**		
±6	±7	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: The parameter SSB $\hat{E}_s/I_{ot}$ is the minimum SSB $\hat{E}_s/I_{ot}$ of the pair of SSBs to which the requirement applies. NOTE 3: Void NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.							

10.1A.14.2 CSI-RS based L1-RSRP accuracy requirements

10.1A.14.2.1 Absolute Accuracy

The accuracy requirements in clause 10.1.19.2.2 shall apply when RedCap UE is capable of 2Rx. When UE is only required to support 1RX, the absolute accuracy requirements in Table 10.1A.14.2.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.4.2 for a corresponding Band for each relevant CSI-RS.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.

The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1A.19.2.1-1.

Table 10.1A.14.2.1-1: CSI-RS based L1-RSRP absolute accuracy for 1Rx RedCap UE in FR1

Accuracy		Conditions						
Normal condition	Extreme condition	CSI-RS Ês/Iot	Io [Note 1] range					
			NR operating band groups [Note 2]	Minimum Io				Maximum Io
dB	dB	dB		dBm / SCS_{CSI-RS}			$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{CSI-RS} = 15 kHz	SCS_{CSI-RS} = 30 kHz	SCS_{CSI-RS} = 60 kHz		
±5.0	±9.5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-70
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-70
			NR_TDD_FR1_C	-120	-117	-114	N/A	-70
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-70
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-70
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-70
			NR_FDD_FR1_G	-118	-115	-112	N/A	-70
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-70
±8.5	±11.5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H	N/A	N/A	N/A	-70	-50

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2.

10.1A.14.2.2 Relative Accuracy

The accuracy requirements in clause 10.1.19.2.2 shall apply when RedCap UE is capable of 2Rx. When UE is only required to support 1RX, the absolute accuracy requirements in Table 10.1A.14.2.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.4.2 for a corresponding Band for each relevant CSI-RS.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.

The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1A.14.2.2-1.

Table 10.1A.14.2.2-1: CSI-RS based L1-RSRP relative accuracy for 1Rx RedCap UE in FR1

Accuracy		Conditions	
Normal condition	Extreme condition	CSI-RS Ês/Iot [Note 2]	Io [Note 1] range

			NR operating band groups [Note 4]	Minimum Io				Maximum Io
dB	dB	dB		dBm / SCS_{CSI-RS}			dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
				SCS_{CSI-RS} = 15 kHz	SCS_{CSI-RS} = 30 kHz	SCS_{CSI-RS} = 60 kHz		
±3	±4	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	-114	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	-112	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: The parameter CSI-RS Ês/Iot is the minimum CSI-RS Ês/Iot of the pair of CSI-RS resources to which the requirement applies. NOTE 3: Void NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.								

10.1A.15 L1-RSRP accuracy requirements for FR2

10.1A.15.1 SSB based L1-RSRP accuracy requirements

10.1A.15.1.1 Absolute Accuracy

The accuracy requirements in clause 10.1.20.1.1 shall apply.

10.1A.15.1.2 Relative Accuracy

The accuracy requirements in clause 10.1.20.1.1 shall apply.

10.1A.15.2 CSI-RS based L1-RSRP accuracy requirements

10.1A.15.2.1 Absolute Accuracy

The accuracy requirements in clause 10.1.20.1.1 shall apply.

10.1A.15.2.2 Relative Accuracy

The accuracy requirements in clause 10.1.20.1.1 shall apply.

10.2 E-UTRAN measurements

10.2.1 Introduction

Accuracy requirements for measurements on E-UTRAN carrier frequencies are specified in clause 10.2 and apply for UE in SA or NR-DC or NE-DC operation mode, unless otherwise specified.

Unless otherwise specified, the requirements in clause 10.2 are applicable for a UE:

- in RRC_CONNECTED state
- performing measurements with appropriate measurement gaps according to clause 9.1.2.
- that is synchronised to the cell that is measured.

The reported measurement result after layer 1 filtering shall be an estimate of the average value of the measured quantity over the measurement period. The reference point for the measurement result after layer 1 filtering is referred to as point B in the measurement model described in TS 36.300 [24].

The accuracy requirements of E-UTRA measurements in this clause are valid for the reported measurement result after layer 1 filtering. The accuracy requirements are verified from the measurement report at point D in the measurement model having the layer 3 filtering disabled.

If the UE needs measurement gaps to perform the inter-RAT NR ─ E-UTRAN FDD and NR ─ E-UTRAN TDD measurements, the relevant measurement procedure and measurement gap patterns stated in clause 9.1.2 shall apply.

10.2.2 E-UTRAN RSRP measurements

NOTE: This measurement is for handover between NR and E-UTRAN.

The measurement period of E-UTRA RSRP in RRC_CONNECTED state is specified in clause 9.4.2 and 9.4.3.

The accuracy requirements of E-UTRA RSRP measurements in RRC_CONNECTED state and the corresponding side conditions shall be the same as the inter-frequency RSRP Accuracy Requirements in clause 9.1.3 of TS 36.133 [15].

The reporting range and mapping specified for RSRP measurements in clause 9.1.4 of TS 36.133 [15] shall apply.

10.2.3 E-UTRAN RSRQ measurements

NOTE: This measurement is for handover between NR and E-UTRAN.

The measurement period of E-UTRA RSRQ in RRC_CONNECTED state is specified in clause 9.4.2 and 9.4.3.

The accuracy requirements of E-UTRA RSRQ measurements in RRC_CONNECTED state and the corresponding side conditions shall be the same as the inter-frequency RSRQ Accuracy Requirements in clause 9.1.6 of TS 36.133 [15].

The requirements for accuracy of E-UTRA RSRQ measurements in RRC_CONNECTED state and the corresponding side conditions shall be the same as the inter-frequency RSRQ Accuracy Requirements in clause 9.1.6 of TS 36.133 [15].

The reporting range and mapping specified for RSRQ measurements in clause 9.1.7 of TS 36.133 [15] shall apply.

10.2.4 E-UTRAN RSTD measurements

The requirements in this clause are valid for UE supporting this capability.

The measurement period is specified in clauses 9.4.4.1 and 9.4.4.2 for inter-RAT NR ─ E-UTRAN FDD and inter-RAT NR ─ E-UTRAN TDD RSTD measurements, respectively.

The accuracy requirements and the corresponding side conditions shall be the same as the inter-frequency measurement accuracy requirements for RSTD measurements in RRC_CONNECTED in clause 9.1.10.2 of TS 36.133 [15].

If the UE needs measurement gaps to perform the inter-RAT NR ─ E-UTRAN FDD and NR ─ E-UTRAN TDD RSTD measurements, the relevant measurement procedure and measurement gap patterns stated in clause 9.1.2 shall apply.

The reporting range and mapping for the inter-RAT NR ─ E-UTRAN FDD and NR ─ E-UTRAN TDD RSTD measurements is the same as specified for RSTD measurements in TS 36.133 [15, clauses 9.1.10.3 and 9.1.10.4].

10.2.5 E-UTRAN RS-SINR measurements

NOTE: This measurement is for handover between NR and E-UTRAN.

The measurement period of E-UTRA RS-SINR in RRC_CONNECTED state is specified in clause 9.4.2 and 9.4.3.

The accuracy requirements of E-UTRA RS-SINR measurements in RRC_CONNECTED state and the corresponding side conditions shall be the same as the inter-frequency RS-SINR Accuracy Requirements in clause 9.1.17.3 of TS 36.133 [15].

The reporting range and mapping for E-UTRA RS-SINR measurements shall be the same as specified for RS-SINR measurements in clause 9.1.17.1 of TS 36.133 [15].

10.2.6 E-UTRAN RSRP measurements for CA/DC Idle Mode Measurements

NOTE: This measurement is for CA/DC Idle Mode measurements between NR and E-UTRAN.

The requirements in this clause are applicable for a UE:

- in state RRC_IDLE or RRC INACTIVE
- that is synchronised to the cell that is measured.

The requirements are for absolute accuracy of E-UTRA RSRP.

The measurement period of E-UTRA RSRP in RRC_IDLE and RRC INACTIVE states are specified in clause 4.4.2.

The accuracy requirements of E-UTRA RSRP measurements in RRC_IDLE and RRC INACTIVE states and the corresponding side conditions shall be as the inter-frequency RSRP Accuracy Requirements in clause 9.1.3B.2 of TS 36.133 [15].

The reporting range and mapping specified for RSRP measurements in clause 9.1.4 of TS 36.133 [15] shall apply.

10.2.7 E-UTRAN RSRQ measurements for CA/DC Idle Mode Measurements

NOTE: This measurement is for CA/DC Idle Mode measurements between NR and E-UTRAN.

The requirements in this clause are applicable for a UE:

- in state RRC_IDLE or RRC INACTIVE
- that is synchronised to the cell that is measured.

The requirements are for absolute accuracy of E-UTRA RSRQ.

The measurement period of E-UTRA RSRQ in RRC_IDLE and RRC INACTIVE states are specified in clause 4.4.2.

The accuracy requirements of E-UTRA RSRQ measurements in RRC_IDLE and RRC INACTIVE states and the corresponding side conditions shall be as the inter-frequency RSRQ Accuracy Requirements in clause 9.1.6B.2 of TS 36.133 [15].

The reporting range and mapping specified for RSRQ measurements in clause 9.1.7 of TS 36.133 [15] shall apply.

10.3 UTRAN FDD Measurements

The requirements in this clause are applicable for a UE:

- in state RRC_CONNECTED
- performing measurements according to clause 9.4.6 with appropriate measurement gaps
- that is synchronised to the cell that is measured.

The reported measurement result after layer 1 filtering shall be an estimate of the average value of the measured quantity over the measurement period. The reference point for the measurement result after layer 1 filtering is referred to as point B in the measurement model described in TS 25.302 [30].

The accuracy requirements in this clause are valid for the reported measurement result after layer 1 filtering. The accuracy requirements are verified from the measurement report at point D in the measurement model having the layer 3 filtering disabled.

10.3.1 UTRAN FDD CPICH RSCP

NOTE: This measurement is for handover between E-UTRAN and UTRAN FDD.

The requirements in this clause are valid for terminals supporting this capability.

The measurement period for RRC_CONNECTED state is specified in clause 9.4.6.

In RRC_CONNECTED state the accuracy requirements shall meet the absolute accuracy requirements in table 10.3.1-1, under the following conditions:

- CPICH Ec/Io condition for a detectable cell is as specified in clause 9.4.6;
- SCH_Ec/Io condition for a detectable cell is as specified in clause 9.4.6.

Table 10.3.1-1: UTRAN FDD CPICH_RSCP absolute accuracy

Accuracy		Conditions		
Normal condition	Extreme condition	Io range		
		UTRA operating bands	Minimum Io	Maximum Io
dB	dB		dBm/3.84 MHz	dBm/3.84 MHz
±6	±9	Band I, IV, VI, X XI, XIX and XXI	-94	-70
		Band IX	-93	-70
		Band II, V and VII	-92	-70
		Band III, VIII, XII, XIII, XIV , XX and XXII	-91	-70
		Band XXV, XXVI Note 1	-90.5	-70
±8	±11	Note 2	-70	-50

NOTE 1: For Band XXVI, the condition has the minimum Io of -92 dBm/3.84 MHz when the carrier frequency of the assigned UTRA channel is within 869-894 MHz for the UE which supports both Band V and Band XXVI operating frequencies.
NOTE 2: The same bands apply for this requirement as for the corresponding highest accuracy requirement.

If the UE, in RRC_CONNECTED state, needs measurement gaps to perform UTRAN FDD measurements, the relevant UTRAN FDD measurement procedure and measurement gap pattern stated in clause 9.4.6 shall apply.

The reporting range and mapping specified for FDD CPICH RSCP in TS 25.133 [29] shall apply.

10.3.2 UTRAN FDD CPICH Ec/No

NOTE: This measurement is for handover between E-UTRAN and UTRAN FDD.

The requirements in this clause are valid for terminals supporting this capability.

The measurement period for RRC_CONNECTED state is specified in clause 9.4.6.

In RRC_CONNECTED state the accuracy requirements shall be the same as the inter-frequency measurement accuracy requirements for FDD CPICH Ec/No in TS 25.133 [29].

If the UE, in RRC_CONNECTED state, needs measurement gaps to perform UTRAN FDD measurements, the UTRAN FDD measurement procedure and measurement gap pattern stated in clause 9.4.6 shall apply.

The reporting range and mapping specified for FDD CPICH Ec/No in TS 25.133 [29] shall apply.

10.4 V2X measurements

10.4.1 Introduction

The requirements in this section are applicable for a UE capable of V2X sidelink communication.

The accuracy requirements in this clause are:

- applicable for AWGN radio propagation conditions,
- assume independent interference (noise) at each receiver antenna port.

10.4.2 Intra-frequency PSBCH-RSRP accuracy requirements for FR1

10.4.2.1 PSBCH-RSRP Absolute Accuracy

The requirements for absolute accuracy of PSBCH-RSRP in this clause apply to a V2X synchronization source on the same frequency as that of the own V2X UE performing the measurement in FR1.

The accuracy requirements in Table 10.4.2.1-1 are valid under the following conditions:

- Demodulation reference signals are transmitted from one port.
- Conditions defined in Clause 7.3E of TS38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for PSBCH-RSRP measurements are fulfilled according to Annex B.4.2 for a corresponding Band for each relevant PSBCH-DMRS.

Table 10.4.2.1-1: Intra-frequency PSBCH-RSRP absolute accuracy in FR1

Accuracy		Conditions						
			Io Note 1 range					
Normal condition	Extreme condition	Ês/Iot Note 3	NR V2X operating band groups Note 2	Minimum Io				Maximum Io
				dBm / SCS_{SL}				
dB	dB	dB		SCS_{SL} = 15 kHz	SCS_{SL} = 30 kHz	SCS_{SL} = 60 kHz	$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
±4.5	±9	≥-6	NR_TDD_FR1_B	-120.5	-117.5	-114.5	N/A	-70
			NR_TDD_FR1_J	-116.5	-113.5	-110.5	N/A	-70
±8	±11	≥-6	NR_TDD_FR1_B, NR_TDD_FR1_J	N/A	N/A	N/A	-70	-50

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: NR V2X operating band groups in FR1 are as defined in clause 3.5.2.
NOTE 3: Ês/Iot for a SyncRef UE is the Ês/Iot of PSBCH-DMRS.

10.4.2.2 PSBCH-RSRP Relative Accuracy

The relative accuracy of PSBCH-RSRP is defined as the PSBCH-RSRP measured from one V2X synchronization source compared to the PSBCH-RSRP measured from another V2X synchronization source on the same frequency in FR1.

The accuracy requirements in Table 10.4.2.2-1 are valid under the following conditions:

- Demodulation reference signals are transmitted from one port.
- Conditions defined in Clause 7.3E of TS38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for PSBCH-RSRP accuracy measurements are fulfilled according to Annex B.4.2 for a corresponding Band for each relevant PSBCH-DMRS.

Table 10.4.2.2-1: Intra-frequency PSBCH-RSRP relative accuracy in FR1

Accuracy		Conditions						
Normal condition	Extreme condition	Ês/Iot Note 3	Io Note 1 range					
			NR V2X operating band groups Note 2	Minimum Io				Maximum Io
				dBm / SCS_{SL}			dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
dB	dB	dB		SCS_{SL} = 15 kHz	SCS_{SL} = 30 kHz	SCS_{SL} = 60 kHz		
±2	±3	≥-3	NR_TDD_FR1_B	-120.5	-117.5	-114.5	N/A	-50
			NR_TDD_FR1_J	-116.5	-113.5	-110.5	N/A	-50
±3	±3	≥-6	Note 4	Note 4	Note 4	Note 4	N/A	Note 4

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: NR V2X operating band groups in FR1 are as defined in clause 3.5.2.
NOTE 3: Ês/Iot for a SyncRef UE is the Ês/Iot of PSBCH-DMRS.
NOTE 4: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.

10.4.3 Intra-Frequency SL-RSSI Measurement Accuracy Requirements for FR1

10.4.3.1 Absolute SL-RSSI Accuracy

The intra-frequency SL-RSSI requirements are specified in Table 10.4.3.1-1. The requirements apply for measurement period of 1slot and for any configured measurement bandwidth larger than 10 RBs, provided that:

- All symbols duing each RSSI measurement duration are available for RSSI sampling within the same measurement interval.

Table 10.4.3.1-1: Intra-frequency SL-RSSI absolute accuracy

Accuracy		Conditions				
Normal condition	Extreme condition	Io Note 1 range				
		NR V2X operating band groups Note 2	Minimum Io			Maximum Io
			dBm/SCS_{SL}			dBm/$BW_{Channel}$
dB	dB		SCS_{SL} = 15kHz	SCS_{SL} = 30kHz	SCS_{SL} = 60kHz	
±2.5	±5.5	NR_TDD_FR1_B	-120.5	-117.5	-114.5	-50
		NR_TDD_FR1_J	-116.5	-113.5	-110.5	-50
±4.5	±7.5	Note 3	Note 3	Note 3	Note 3	Note 3

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: NR V2X operating band groups are as defined in Section 3.5 for the corresponding NR operating bands.
NOTE 3: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.

10.4.4 Intra-Frequency L1 SL-RSRP Measurement Accuracy Requirements for FR1

10.4.4.1 Absolute L1 SL-RSRP Accuracy

The requirements for absolute accuracy of L1 SL-RSRP in this clause apply to a UE performing PSCCH-RSRP and/or PSSCH-RSRP measurements on the same frequency as used by operating V2X sidelink communication.

The accuracy requirements in Table 10.4.4.1-1 are valid under the following conditions:

- Demodulation reference signals for PSCCH and/or PSSCH are transmitted from one port.
- Conditions defined in clause 7.3E of TS38.101-1 [18] for reference sensitivity are fulfilled.
- PSCCH-RSRP|dBm and/or PSSCH-RSRP|dBm according to Annex B.4.4 for a corresponding Band are fulfilled.

Table 10.4.4.1-1: Intra-frequency L1 SL-RSRP absolute accuracy for UE capable of V2X sidelink communication

Accuracy		Conditions						
			Io [Note 1] range					
Normal condition	Extreme condition	Ês/Iot [Note 3]	NR V2X operating band groups [Note 2]	Minimum Io				Maximum Io
				dBm/SCS			dBm/BW$_{Channel}$	dBm/BW$_{Channel}$
dB	dB	dB		SCS = 15kHz	SCS = 30kHz	SCS = 60kHz		
± 4.5	± 9	≥0 dB	NR_TDD_FR1_B	-120.5	-117.5	-114.5	N/A	-70
			NR_TDD_FR1_J	-116.5	-113.5	-110.5	N/A	-70
± 8	± 11	≥0 dB	NR_TDD_FR1_B NR_TDD_FR1_J	N/A	N/A	N/A	-70	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: NR V2X operating band groups are as defined in Section 3.5 for the corresponding NR operating bands. NOTE 3: The parameter Ês/Iot is the Ês/Iot of PSCCH-DMRS and/or PSSCH-DMRS.								

10.4.5 Intra-Frequency Discovery Signal Measurement Accuracy Requirements

The requirements in this clause are applicable for a remote sidelink UE:

- is out of coverage on the frequency used for sidelink, and
- that is synchronised to the sidelink relay UE that is measured.

10.4.5.1 Absolute Discovery Signal Measurement Accuracy

The requirements for absolute accuracy of discovery signal measurement in this clause apply to a sidelink UE performing SD-RSRP measurements for direct to indirect path swich or SL-RSRP measurements for indirect to direct path switch on the same frequency as used by the sidelink relay UE transmitting the relay Discovery message.

The accuracy requirements in Table 10.4.5.1-1 are valid under the following conditions:

- Demodulation reference signals for PSCCH and/or PSSCH are transmitted from one port.
- Conditions defined in clause 7.3E of TS38.101-1 [18] for reference sensitivity are fulfilled.
- PSCCH-RSRP|dBm and/or PSSCH-RSRP|dBm according to Annex B.4.4 for a corresponding Band are fulfilled.

Table 10.4.5.1-1: Intra-frequency discovery signal measurement absolute accuracy for a remote sidelink UE [2] capable of sidelink Communication and sidelink Discovery and configured by upper layers for relay operation.

Accuracy		Conditions				
			Io [Note 1] range			
Normal condition	Extreme condition	Ês/Iot [Note 3]	NR V2X operating band groups [Note 2]	Minimum Io		Maximum Io
dB	dB	dB		dBm/SCS	dBm/BW$_{Channel}$	dBm/BW$_{Channel}$

				SCS = 15kHz	**SCS = 30kHz**	**SCS = 60kHz**		
± 4.5	± 9	≥0 dB	NR_TDD_FR1_B	-120.5	-117.5	-114.5	N/A	-70
			NR_TDD_FR1_J	-116.5	-113.5	-110.5	N/A	-70
± 8	± 11	≥0 dB	NR_TDD_FR1_B NR_TDD_FR1_J	N/A	N/A	N/A	-70	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: NR sidelink operating band groups are as defined in Section 3.5 for the corresponding NR operating bands. NOTE 3: The parameter Ês/Iot is the Ês/Iot of PSCCH-DMRS and/or PSSCH-DMRS.								

11 Void

12 V2X Requirements

12.1 Introduction

This clause contains the requirements for the UE capable of V2X sidelink communication when the UE is out of coverage on the carrier used for V2X sidelink operation, as defined in TS 38.304 [1]. The requirements apply when the UE is:

- in any cell selection state, or,
- configured for V2X SL operation on a V2X carrier which is dedicated to only V2X SL operation and configured with only a PCell on WAN carrier.
- configured for inter-band con-current V2X operation.
- configured for intra-band con-current V2X operation with different carriers.

Note: Any cell selection state refers to a UE that is out of network coverage and is not associated with a serving cell on any carrier as defined in TS 38.304 [1].

Note: When a UE in RRC_CONNECTED state is performing transmissions and/or reception for V2X sidelink communication, the UE shall meet all the requirements specified in Clause 9 assuming that UE has a dedicated RX/TX chain for V2X sidelink communication. Otherwise, the UE may interrup the V2X sidelink communication in order to meet the measurement requirements specified in Clause 9.

This clause also contains the requirements for the UE capable of V2X sidelink communication when the UE is in coverage on the carrier used for V2X sidelink operation, as defined in TS 38.304 [1]. The requirements apply when the UE is:

- configured for intra-band con-current NR V2X cooperation with same carrier.

For UE capable of Public Safety sidelink communication and/or other commercial sidelink commnunication, unless explicitly stated, V2X requirements apply.

12.2 UE Transmit Timing

12.2.1 Introduction

This clause contains requirements of transmission timing for V2X sidelink communication when:

- GNSS is used as the synchronization reference source;
- NR Cell is used as the synchronization reference source;
- E-UTRAN Cell is used as the synchronization reference source;
- SyncRef UE is used as the synchronization reference source.

12.2.2 GNSS as synchronization reference source

The requirements in this subclause are applicable when the reference timing used by the UE for V2X sidelink communication is derived from GNSS.

The sidelink transmissions takes place $(N_{TA,SL} + N_{TA\ offset}) \times T_c$ before the subframe starting boundary as defined in TS 38.331 [2], where $N_{TA\ offset}$ = 0 and $N_{TA,SL}$=0.

The transmission timing error for sidelink transmissions shall be less than or equal to $\pm T_e$ where the timing error limit value T_e is defined in Table 12.2.2-1.

Table 12.2.2-1: T_e Timing Error Limit

Frequency Range of sidelink	$T_{e_}$
FR1	$12*64*T_c$
Note 1: T_c is the basic timing unit defined in TS 38.211 [6].	

12.2.3 NR Cell as synchronization reference source

The requirements in this subclause are applicable when the reference timing used for sidelink transmissions is a NR serving cell on a non-V2X sidelink carrier or a V2X sidelink carrier.

The sidelink transmissions takes place $(N_{TA,SL} + N_{TA\ offset}) \times T_c$ before the reception of the first detected path (in time) of the corresponding downlink frame from the reference cell, where $N_{TA,SL}$ = 0. If uplink transmission and sidelink transmission are in the same band, $N_{TA\ offset}$ is defined in Table 7.1.2-2, otherwise $N_{TA\ offset}$ is 0.

The transmission timing error for sidelink transmissions shall be less than or equal to $\pm T_e$ where the timing error limit value T_e is defined in Table 12.2.3-1.

Table 12.2.3-1: T_e Timing Error Limit

Frequency Range of sidelink	SCS of SSB signals (kHz)	SCS of sidelink signals (kHz)	T_e
FR1	15	15	$14*64*T_c$
		30	$12*64*T_c$
		60	$12*64*T_c$
	30	15	$10*64*T_c$
		30	$10*64*T_c$
		60	$9*64*T_c$
Note 1: T_c is the basic timing unit defined in TS 38.211 [6].			

12.2.4 E-URTAN Cell as synchronization reference source

The requirements in this subclause are applicable when the reference timing used for sidelink transmissions is an E-UTRAN serving cell on a non-V2X sidelink carrier.

The sidelink transmissions takes place $(N_{TA,SL} + N_{TA\ offset}) \times T_c$ before the reception of the first detected path (in time) of the corresponding E-UTRAN downlink frame from the reference cell, where $N_{TA\ offset}$ = 0 and $N_{TA,SL}$=0.

The transmission timing error for sidelink transmissions shall be less than or equal to $\pm T_e$ where the timing error limit value T_e is defined in Table 12.2.4-1.

Table 12.2.4-1: T_e Timing Error Limit

Frequency Range of sidelink	E-UTRAN downlink bandwidth (MHz)	$T_{e_}$
FR1	≥3	$14*64*T_c$
Note 1: T_c is the basic timing unit defined in TS 38.211 [6].		

12.2.5 SyncRef UE as synchronization reference source

The requirements in this subclause are applicable when the reference timing used for deriving sidelink transmission is from SyncRef UE transmitting sidelink synchronization signals.

The sidelink transmissions takes place $(N_{TA,SL} + N_{TA\ offset}) \times T_c$ before the reception of the first detected path (in time) of the corresponding timing reference frame from the SyncRef UE, where $N_{TA\ offset}$ = 0 and $N_{TA,SL}$=0.

The transmission timing error for sidelink transmissions shall be less than or equal to $\pm T_e$ where the timing error limit value T_e is defined in Table 12.2.5-1.

Table 12.2.5-1: T_e Timing Error Limit

Frequency Range of sidelink	SCS of sidelink signals (kHz)	T_e
FR1	15	$12*64*T_c$
	30	$8*64*T_c$
	60	$5*64*T_c$
Note 1: T_c is the basic timing unit defined in TS 38.211 [6].		

12.3 Initiation/Cease of SLSS Transmissions

12.3.1 Introduction

The requirements in this subclause are applicable to the UE capable of V2X sidelink communication when:

- GNSS is used as the synchronization reference source;
- NR Cell is used as the synchronization reference source;
- EUTRAN Cell is used as the synchronization reference source;
- SyncRef UE is used as the synchronization reference source.

12.3.1.1 Initiation/Cease of SLSS transmissions with NR cell as synchronization reference source

The requirements apply when the NR Cell is used as synchronization reference source and when the UE is

- out of coverage on the V2X NR sidelink carrier and in-coverage with a serving cell on a NR non-V2X sidelink carrier, or
- in coverage with a serving cell on a NR V2X sidelink carrier,

and when the conditions for SLSS transmissions specified in TS 38.331[2] are met; *networkControlledSyncTx* is not configured; and *syncTxThreshIC* is included in *SystemInformationBlockType12*. The UE shall be capable of measuring the RSRP of the cell used as synchronization reference source to evaluate to initiate/cease SLSS transmissions within $T_{evaluate,SLSS}$

where,

- $T_{evaluate,SLSS}$ is as specified in Table 12.3.1.1-1 when UE performs SSB based measurements without measurement gaps.
- $T_{evaluate,SLSS}$ is as specified in Table 12.3.1.1-2 when UE performs SSB based measurements with measurement gaps.

Table 12.3.1.1-1: $T_{evaluate,SLSS}$ for measurements without measurement gaps when NR cell is used as synchronization reference source (FR1)

DRX cycle in NR cell	$T_{evaluate,SLSS}$
No DRX	max(400ms, ceil(2 x 5 x K_p) x SMTC period)[Note 1]
DRX cycle≤ 320ms	max(400ms, ceil(1.5 x 2 x 5 x K_p) x max(SMTC period, DRX cycle))
DRX cycle>320ms	ceil(7 x K_p) x DRX cycle

NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified

Table 12.3.1.1-2: $T_{evaluate,SLSS}$ for measurements with measurement gaps when NR cell is used as synchronization reference source (FR1)

DRX cycle in NR cell	$T_{evaluate,SLSS}$
No DRX	max(400ms, 2 x 5 x max(MGRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(400ms, ceil(2 x 1.5x 5) x max(MGRP, SMTC period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	7 x max(MGRP, DRX cycle) x $CSSF_{intra}$

If higher layer filtering is configured, an additional delay in evaluation to initiate/cease SLSS transmissions can be expected.

For the NR cell as synchronization reference source:

- SS-RSRP related side conditions given in clauses 10.1.2 for FR1, respectively, for a corresponding Band,
- SS-RSRQ related side conditions given in clauses 10.1.7 for FR1, respectively, for a corresponding Band,
- SS-SINR related side conditions given in clauses 10.1.12 for FR1, respectively, for a corresponding Band,
- SSB_RP and SSB Ês/Iot according to Annex B.2.2 for a corresponding Band.

12.3.1.2 Initiation/Cease of SLSS transmissions with EUTRAN cell as synchronization reference source

The requirements apply when the EUTRAN Cell is used as synchronization reference source and when the UE is

- out of coverage on the V2X NR sidelink carrier and in-coverage with a serving cell on a LTE non-V2X sidelink carrier,

and when the conditions for SLSS transmissions specified in TS 36.331[16] are met; *networkControlledSyncTx* is not configured; and *syncTxThreshIC* is included in *SystemInformationBlockType28*. The UE shall be capable of measuring the RSRP of the cell used as synchronization reference source to evaluate to initiate/cease SLSS transmissions within $T_{evaluate,SLSS}$

where,

- $T_{evaluate,SLSS}$ = 0.4 seconds when UE is not configured with DRX.
- $T_{evaluate,SLSS}$ = as specified in Table 12.3.1.2-1 when UE is configured with DRX.

Table 12.3.1.2-1: $T_{evaluate,SLSS}$ when EUTRAN cell is used as synchronization reference source

DRX cycle length in EUTRAN cell[s]	$T_{evaluate,SLSS}$ [s] (number of DRX cycles)
≤0.04	0.4 (Note 1)
0.04<DRX-cycle≤2.56	Note 2 (6)
Note1: Number of DRX cycles depends upon the DRX cycle in use Note2: Time depends upon the DRX cycles in use	

If higher layer filtering is configured, an additional delay in evaluation to initiate/cease SLSS transmissions can be expected.

For the cell as synchronization reference source:

- RSRP related side conditions given in TS 36.133[15] Clauses 9.1.2.1 and 9.1.2.2 and RSRQ related side conditions given in TS 36.133[15] Clause 9.1.5.1 for a corresponding Band are fulfilled,

- SCH_RP and SCH Ês/Iot according to TS 36.133[15] Annex B.2.1 for a corresponding Band are fulfilled.

12.3.1.3 Initiation/Cease of SLSS transmissions with GNSS as synchronization reference source

The requirements apply when GNSS is used as synchronization reference source and when the UE is

- out of coverage on the V2X sidelink carrier and in-coverage with a serving cell on a non-V2X sidelink carrier, or
- in coverage with a serving cell on a NR V2X sidelink carrier,

and when the conditions for SLSS transmissions specified in TS 38.331[2] are met; *networkControlledSyncTx* is not configured; and *syncTxThreshIC* is included in *SystemInformationBlockType12* in a NR cell.

When the conditions for SLSS transmissions specified in TS 36.331[16] are met; *networkControlledSyncTx* is not configured; and *syncTxThreshIC* is included in *SystemInformationBlockType28* in a EUTRAN cell.

The requirements in Clause 12.3.1.1 shall apply if the serving cell is a NR cell.

The requirements in Clause 12.3.1.2 shall apply if the serving cell is a EUTRAN cell.

12.3.1.4 Initiation/Cease of SLSS transmissions with SyncRef UE as synchronization reference source

The requirements apply when SyncRef UE is used as synchronization reference source and when the UE is

- in any cell selection state, or
- out of coverage on the V2X sidelink carrier and is associated with a serving cell on a non-V2X sidelink carrier, or
- in coverage with a serving cell on a NR V2X sidelink carrier,

and when the conditions for SLSS transmissions specified in TS 38.331[2] are met and when SyncRef UE is used as synchronization reference source and if *syncTxThreshOoC* is included in the preconfigured V2X parameters.

The UE shall be capable of measuring the PSBCH-RSRP of the selected SyncRef UE used as synchronization reference source and evaluate it to initiate/cease SLSS transmissions within $T_{evaluate,SLSS}$, as shown in Table 12.3.1.4-1.

Table 12.3.1.4-1: $T_{evaluate,SLSS}$ when SyncRef UE is used as synchronization reference source

SL-DRX cycle[Note 1] [ms]	$T_{evaluate,SLSS}$ [ms]
No SL-DRX	4 x S-SSB periods
SL-DRX cycle ≤ 160ms	4 x S-SSB periods
SL-DRX cycle > 160ms	4 x SL-DRX cycle
Note 1: If multiple SL-DRX cycles are configured for SL UE, the SL-DRX cycle in the requirement is the shortest one. When the shortest SL-DRX cycle UE used changes, the requirements do not apply to the time of transition.	

If higher layer filtering for PSBCH-RSRP measurements is pre-configured, an additional delay in evaluation to initiate/cease SLSS transmissions can be expected.

For the selected SyncRef UE as defined in TS 38.331 [2] used to derive transmission timing for V2X sidelink communication:

- PSBCH-RSRP related side conditions given in Clause 12.4 for a corresponding Band are fulfilled,
- V2X S-SSB_RP and S-SSB Ês/Iot according to Annex B. 4 for a corresponding Band are fulfilled.

12.4 Selection / Reselection of V2X Synchronization Reference Source

The requirements defined in this clause do not apply to the UEs that do not support transmission and reception of SLSS.

A SyncRef UE is considered to be detectable when

- PSBCH-RSRP related side conditions given in Clause 10 are fulfilled for a corresponding Band,
- S-SSB_RP and S-SSB Ês/Iot according to Annex B.4.3 for a corresponding Band are fulfilled.

When GNSS synchronization reference source is configured as the highest priority and

- UE is synchronized to GNSS directly,
  - UE shall not drop any V2X SLSS and data transmission for the purpose of selection/reselection to the SyncRef UE.
- UE is synchronized to a SyncRef UE that is synchronized to GNSS directly or in-directly,
  - UE shall not drop any V2X data transmission for the purpose of selection/reselection to the SyncRef UE. The UE shall be able to identify newly detectable intra-frequency SyncRef UE within $T_{detect,SyncRef\ UE_V2X}$ seconds if the SyncRef UE meets the selection / reselection criterion defined in TS 38.331[2]. $T_{detect,SyncRef\ UE_V2X}$ is defined as 1.6 seconds at S-SSB Ês/Iot ≥ 0 dB, provided that the UE is allowed to drop a maximum of 30% of its SLSS transmissions during $T_{detect,SyncRef\ UE_V2X}$ for the purpose of selection / reselection to the SyncRef UE.
- in other case
- When UE is in non-SL-DRX
  - The UE shall be able to identify newly detectable intra-frequency SyncRef UE within $T_{detect,SyncRef\ UE_V2X}$ seconds if the SyncRef UE meets the selection / reselection criterion defined in TS 38.331[2]. $T_{detect,SyncRef\ UE_V2X}$ is defined as 8 seconds at S-SSB Ês/Iot ≥ 0 dB, provided that the UE is allowed to drop a maximum of 6 % of its V2X data and SLSS transmissions during $T_{detect,SyncRef\ UE_V2X}$ for the purpose of selection / reselection to the SyncRef UE.
  - UE is allowed to drop up to 2 slots of its V2X data reception per PSBCH monitoring occasion and overall drop rate shall not exceed 0.3% of its V2X data reception during $T_{detect,SyncRef\ UE_V2X}$ for the purpose of selection / reselection to the SyncRef UE.
- When UE is in SL-DRX
  - UE shall be able to identify newly detectable intra-frequency SyncRef UE within $T_{detect,SyncRef\ UE_V2X}$ seconds if the SyncRef UE meets the selection / reselection criterion defined in TS 38.331[2]. $T_{detect,SyncRef\ UE_V2X}$ is defined as 8 seconds at S-SSB Ês/Iot ≥ 0 dB, provided that the V2X UE is allowed to drop a maximum of 6 % of its V2X data and SLSS transmissions for the purpose of selection / reselection to the SyncRef UE.
  - UE is allowed to drop up to 2 slots of its V2X data reception per PSBCH monitoring occasion and UE is allowed to drop at most an aggregated window of 24ms of its V2X data reception during $T_{detect,SyncRef\ UE_V2X}$ for the purpose of selection / reselection to the SyncRef UE.
  - The UE is allowed to extend $T_{detect,SyncRef\ UE_V2X}$ to max(4 x 50 SL-DRX cycle length, 8s) when the following conditions are satisfied over an evaluation period $T_{evaluate,SLSS}$ in clause 12.3.1.1 if an NR cell is used as synchronization reference source, or $T_{evaluate,SLSS}$ in clause 12.3.1.2 if an EUTRA cell is used as synchronization reference source, or $T_{evaluate,SLSS}$ in clause 12.3.1.4 if an SLSS is used as synchronization reference source. If multiple SL-DRX cycles are configured, the SL-DRX cycle length is the longest one.
    - SS-RSRP is larger than *syncTxThreshOoC*.

When serving cell/PCell synchronization reference source is configured as the highest priority,

- When UE is in non-SL-DRX

- UE shall be able to identify newly detectable intra-frequency SyncRef UE within $T_{detect,SyncRef\ UE_V2X}$ seconds if the SyncRef UE meets the selection / reselection criterion defined in TS 38.331[2]. $T_{detect,SyncRef\ UE_V2X}$ is defined as 8 seconds at SCH Es/Iot ≥ 0 dB, provided that the V2X UE is allowed to drop a maximum of 6 % of its V2X data and SLSS transmissions for the purpose of selection / reselection to the SyncRef UE.

- UE is allowed to drop up to 2 slots of its V2X data reception per PSBCH monitoring occasion and overall drop rate shall not exceed 0.3% of its V2X data reception during $T_{detect,SyncRef\ UE_V2X}$ for the purpose of selection / reselection to the SyncRef UE.

- When UE is in SL-DRX

  - The UE shall be able to identify newly detectable intra-frequency SyncRef UE within $T_{detect,SyncRef\ UE_V2X}$ seconds if the SyncRef UE meets the selection / reselection criterion defined in TS 38.331[2]. $T_{detect,SyncRef\ UE_V2X}$ is defined as 8 seconds at SCH Es/Iot ≥ 0 dB, provided that the UE is allowed to drop its V2X data and SLSS transmissions at most in an aggregated window of 480ms during $T_{detect,SyncRef\ UE_V2X}$ for the purpose of selection / reselection to the SyncRef UE.

  - UE is allowed to drop up to 2 slots of its V2X data reception per PSBCH monitoring occasion and UE is allowed to drop at most an aggregated window of 24ms of its V2X data reception during $T_{detect,SyncRef\ UE_V2X}$ for the purpose of selection / reselection to the SyncRef UE.

  - The UE is allowed to extend $T_{detect,SyncRef\ UE_V2X}$ to max(4 x 50 SL-DRX cycle length, 8s) when the following conditions are satisfied over an evaluation period $T_{evaluate,SLSS}$ in clause 12.3.1.1 if an NR cell is used as synchronization reference source, or $T_{evaluate,SLSS}$ in clause 12.3.1.2 if an EUTRA cell is used as synchronization reference source, or $T_{evaluate,SLSS}$ in clause 12.3.1.4 if an SLSS is used as synchronization reference source. If multiple SL-DRX cycles are configured, the SL-DRX cycle length is the longest one.

  - SS-RSRP is larger than *syncTxThreshOoC*.

UE shall be capable of performing PSBCH-RSRP measurements for 3 identified intra-frequency SyncRef UE with the measurement period of $T_{measure,PSBCH-RSRP}$ in Table 12.4-1. It is assumed that the SyncRef UE do not drop or delay any SLSS transmission within the measurement period. Otherwise, the measurement period may be extended.

Table 12.4-1: PSBCH-RSRP measurement period for intra-frequency SyncRef UE

SL-DRX cycle[Note 1] [ms]	$T_{measure,PSBCH-RSRP}$ [ms]
No SL-DRX	320
SL-DRX cycle ≤ 160ms	320
SL-DRX cycle > 160ms	2 x SL-DRX cycle
Note 1: If multiple SL-DRX cycles are configured, the SL-DRX cycle is the shortest one.	

When UE is synchronized to GNSS directly, before selection / reselection of the new synchronization reference source UE shall evaluate the GNSS synchronization source reliability for at least 20 seconds before changing the synchronization reference from GNSS to another synchronization reference source. UE shall be always synchronized to GNSS directly during the evaluation of GNSS synchronization source reliability.

12.5 L1 SL-RSRP measurements

12.5.1 Introduction

This clause contains the measurement requirements related to resource reselection and resource pre-emption of the UE capable of V2X sidelink communication.

12.5.2 SL-RSRP measurements

The UE physical layer shall be capable of performing the L1 SL-RSRP measurements on the carrier operating V2X sidelink communication for determining the subset of resources to be excluded in PSSCH resource selection in sidelink transmission mode 2. The L1 SL-RSRP measurement period corresponds to one slot and the measurement shall meet the L1 SL-RSRP measurement accuracy requirement in Clause 10. After resource (re-)selection procedure, re-

evaluation is performed on the reserved resources by L1 SL-RSRP measurements before transmission of SCI with reservation when the conditions specified in TS 38.214[26] are satisfied.

When the pre-emption mechanism is enabled for the resource pool that UE is monitoring and selecting resource from, after UE selects from the resource not excluded based on L1 SL-RSRP measurement procedure, the UE shall be capable of triggering reselection of already signalled resource(s) as a resource reservation when the conditions specified in TS38.214[26] are satisfied.

When partial sensing mechanism is enabled for the resource pool that UE is monitoring and selecting resource from, the UE shall be capable of performing the L1 SL-RSRP measurements on the sensing periods specified in TS38.214[26]. When SL-DRX is enabled, the UE shall be capable of performing the L1 SL-RSRP measurements and select resource during SL-DRX active time as specified in TS38.214[26].

12.6 Congestion Control measurements

The UE shall be capable of estimating the channel busy ratio for one or more transmission pools indicated by higher layers in TS 38.331[2], based on SL-RSSI measurements provided by the physical layer.

When no sidelink transmissions occur, the UE physical layer shall perform a single-shot SL-RSSI measurement for each sub-channel included in all the slots configured as transmission pools.

The SL-RSSI measurement performed according to this clause shall meet the SL-RSSI measurement accuracy requirements defined in Clause 10.

The UE shall perform channel busy ratio (CBR) measurement based on SL-RSSI measurements as described in TS 38.215 [4].

12.7 Interruption

12.7.1 Interruptions to WAN due to V2X Sidelink Communication

This clause contains the requirements related to the interruptions on the PCell/serving cell due to V2X sidelink communication.

A UE capable of V2X sidelink communication may indicate its interest (initiation or termination) in V2X sidelink communication to the connected gNodeB using IE *SidelinkUEInformationNR* in TS38.331[2].

The UE is allowed an interruption of up to the duration shown in table 12.7.1-1 on the PCell/serving cell during the RRC reconfiguration procedure that includes the V2X sidelink communication configuration message *SL-ConfigDedicatedNR* in TS 38.331[2] (setup and release). This interruption is for both uplink and downlink of the PCell/serving cell.

Table 12.7.1-1: Interruption length at V2X RRC reconfiguration

μ	NR Slot length (ms)	Interruption length (number of slots)
0	1	2
1	0.5	3
2	0.25	5
3	0.125	9

12.7.2 V2X Sidelink Communication Dropping due to synchronization source change

This clause contains the requirements related to the interruptions on the V2X sidelink communication due to synchronization source change.

For NR V2X UE not supporting gNB/eNB as synchronization reference source, UE is allowed to drop LTE and NR V2X SL transmission or reception for up to 1ms when synchronization source is changed, where the drop of LTE V2X SL transmission or reception applies only to in-device coexistence scenario in TS38.213 [3]:

- From GNSS
  - to syncRef UE that is synchronized to GNSS directly/in-directly
  - to syncRef UE that has the lowest priority
- From syncRef UE that is synchronized to GNSS directly/in-directly
  - to GNSS
  - to syncRef UE that has the lowest priority
- From syncRef UE that has the lowest priority
  - to GNSS
  - to syncRef UE that is synchronized to GNSS directly/in-directly
  - to syncRef UE that has the lowest priority

For NR V2X UE supporting gNB/eNB as synchronization reference source, UE is allowed to drop LTE and NR V2X SL transmission or reception for up to 1ms when synchronization source is changed, where the drop of LTE V2X SL transmission or reception applies only to in-device coexistence scenario in TS38.213 [3]:

- From GNSS
  - to syncRef UE that is synchronized to GNSS directly/in-directly
  - to gNB/eNB
  - to syncRef UE that is synchronized to gNB/eNB directly
  - to syncRef UE that is synchronized to gNB/eNB in-directly
  - to syncRef UE that has the lowest priority
- From syncRef UE that is synchronized to GNSS directly/in-directly
  - to GNSS
  - to gNB/eNB
  - to syncRef UE that is synchronized to gNB/eNB directly
  - to syncRef UE that is synchronized to gNB/eNB in-directly
  - to syncRef UE that has the lowest priority
- From gNB or eNB
  - to GNSS
  - to syncRef UE that is synchronized to GNSS directly/in-directly
  - to eNB or gNB
  - to syncRef UE that is synchronized to gNB or eNB directly
  - to syncRef UE that is synchronized to gNB or eNB in-directly
  - to syncRef UE that has the lowest priority
- From syncRef UE that is synchronized to gNB/eNB directly
  - to GNSS

  - to syncRef UE that is synchronized to GNSS directly/in-directly
  - to gNB/eNB
  - to syncRef UE that is synchronized to gNB/eNB directly
  - to syncRef UE that is synchronized to gNB/eNB in-directly
  - to syncRef UE that has the lowest priority
- From syncRef UE that is synchronized to gNB/eNB in-directly
  - to GNSS
  - to syncRef UE that is synchronized to GNSS directly/in-directly
  - to gNB/eNB
  - to syncRef UE that is synchronized to gNB/eNB directly
  - to syncRef UE that is synchronized to gNB/eNB in-directly
  - to syncRef UE that has the lowest priority
- From syncRef UE that has the lowest priority
  - to GNSS
  - to syncRef UE that is synchronized to GNSS directly
  - to syncRef UE that is synchronized to GNSS in-directly
  - to gNB/eNB
  - to syncRef UE that is synchronized to gNB/eNB directly
  - to syncRef UE that is synchronized to gNB/eNB in-directly
  - to syncRef UE that has the lowest priority

UE is allowed to interruption any V2X sidelink signals including PSSCH, PSCCH, PSBCH, PSFCH and SLSS signals.

12.7.3 Interruptions to WAN due to switching between E-UTRA V2X Sidelink and NR V2X Sidelink

This sub-clause contains the requirements related to the interruptions on the PCell/serving cell due to switching between E-UTRA V2X sidelink and NR V2X sidelink transmissions on a dedicated carrier. It is applicable for UE capable of both NR V2X sidelink and E-UTRA V2X sidelink transmissions in TDM-ed manner.

When a UE capable of switching between E-UTRA V2X sidelink and NR V2X sidelink, the UE is allowed an interruption of up to the duration shown in table 12.7.3-1 on the PCell/serving cell during the E-UTRA V2X sidelink and NR V2X sidelink switch.

This interruption is for both uplink and downlink of the PCell/serving cell.

Table 12.7.3-1: Interruption length due to switching between E-UTRA V2X and NR V2X

μ	Slot length (ms)	Interruption length (number of slots)
0	1	2
1	0.5	2
2	0.25	2
3	0.125	3

12.7.4 Interruptions to WAN at transitions between active and non-active during SL-DRX

Interruption on PCell/serving cell if configured due to V2X transitions between active and non-active during SL-DRX are allowed with up to 1% probability of missed ACK/NACK when the configured SL-DRX cycle is less than 640 ms, and 0.625% probability of missed ACK/NACK is allowed when the configured SL-DRX cycle is 640 ms or longer. When multiple SL-DRX cycles are configured, the shortest SL-DRX cycle is applied. Each interruption shall not exceed X slot as defined in table 12.7.4-1.

Table 12.7.4-1: Interruption length X at transition between active and non-active during SL-DRX

μ	NR Slot length (ms)	Interruption length X (slots)	
		Sync	Async
0	1	1	2
1	0.5	1	2
2	0.25	3	

For SL-DRX active to inactive state transition, when the UE is in non-DRX or DRX on WAN and V2X is in sidelink resource allocation mode 2, the interruptions in this clause shall not apply when one of the following conditions is met:

- While receiving paging,
- While receiving system information.

In addition, for SL-DRX active to inactive state transition, when the UE is in non-DRX or DRX on WAN and V2X is in sidelink resource allocation mode 2 and SL DRX cycle is less than 320 ms, the interruptions in this clause shall not apply when one of the following conditions is met:

- T310 timer is running for RLF on PCell
- performing candidate beam detection on PCell/serving cell as specfied in section 8.5.5. and 8.5.6

12.7.5 Interruptions to V2X sidelink at transitions between active and non-active during DRX

Interruption on V2X sidelink if configured due to PCell transitions between active and non-active during DRX are allowed with up to 1% probability of missed ACK/NACK when the configured DRX cycle is less than 640 ms, and 0.625% probability of missed ACK/NACK is allowed when the configured DRX cycle is 640 ms or longer. It is only applied when HARQ process on V2X sidelink is supported. Each interruption shall not exceed X slot as defined in table 12.7.5-1.

Table 12.7.5-1: Interruption length X at transition between active and non-active during DRX

μ	NR V2X Slot length (ms)	Interruption length X (slots)	
		Sync	Async
0	1	1	2
1	0.5	1	2
2	0.25	3	

12.7.6 Interruptions to V2X sidelink due to Active BWP switching Requirement

This clause contains the requirements related to the interruptions on the V2X sidelink due to BWP switch in FDM based intra-band concurrent V2X operation.

The requirements in clause 8.2.2.2.5 shall apply. The interrupted X slot is defined in Table 12.7.6-1.

Table 12.7.6-1: Interruption length X

μ	NR V2X Slot length (ms)	Interruption length X (slots)
0	1	1
1	0.5	1
2	0.25	3

Note: No sidelink communication happens during BWP switching delay period for TDM based intra-band concurrent operation.

12.7.7 Interruptions to WAN due to SyncRef UE detection and/or Sensing during SL DRX off duration

This sub-clause contains the requirements related to the interruptions on the PCell/serving cell due to SyncRef UE detection and/or Sensing during SL DRX off duration.

The requirements in clause 12.7.4 shall apply.

12.7.8 Interruptions at NR sidelink discovery configuration

This clause contains the requirements related to the interruptions on the PCell/serving cell due to NR sidelink discovery.

A UE capable of NR sidelink discovery may indicate its interest (initiation or termination) in NR sidelink discovery to the connected gNodeB using IE *SidelinkUEInformationNR* in TS38.331[2].

The UE is allowed an interruption of up to the duration shown in Table 12.7.8-1 on the PCell/serving cell during the RRC reconfiguration procedure that includes the NR sidelink discovery configuration message *sl-DiscConfig* in TS 38.331[2] (setup and release). This interruption is for both uplink and downlink of the PCell/serving cell.

12.7.8-1: Interruption length at NR sidelink discovery configuration

μ	NR Slot length (ms)	Interruption length (number of slots)
0	1	2
1	0.5	3
2	0.25	5
3	0.125	9

12.8 Reliability of GNSS signal

This clause contains requirements regarding reliability of GNSS signal for the UE capable of V2X sidelink communication under the following additional condition:

- The UE is configured or pre-configured with parameters for enabling the UE to acquire the GNSS synchronization.

If UE considers GNSS is a reliable synchronization reference, the UE shall meet timing accuracy requirement as specified in 12.2 and frequency accuracy requirement as specified in 6.4E of TS38.101-1[18]. Otherwise, the UE shall be capable to select another synchronization reference source.

12.9 Scheduling availability

12.9.1 Scheduling availability of UE switching between E-UTRA sidelink and NR sidelink

This clause contains the restrictions on the scheduling availability for V2X sidelink due to switching between E-UTRA V2X sidelink and NR V2X sidelink transmission on a dedicated carrier. For the NR V2X sidelink, the assumed number of configured symbols in a slot is 14.

When switch from E-UTRA V2X sidelink to NR V2X sidelink occurs in NR slot ‘n’,

- UE is not expected to transmit or receive on NR V2X sidelink on the slot ‘n’.

When switch from NR V2X sidelink to E-UTRA V2X sidelink occurs in NR slot ‘n-1’,

- UE is not expected to transmit or receive on NR V2X sidelink on the slot ‘n-1’.

When switch from NR V2X sidelink to E-UTRA V2X sidelink occurs in E-UTRA subframe ‘n’,

- UE is not expected to transmit or receive on E-UTRA V2X sidelink on the subframe ‘n’.

When switch from E-UTRA V2X sidelink to NR V2X sidelink occurs in E-UTRA subframe ‘n-1’,

- UE is not expected to transmit or receive E-UTRA on V2X sidelink on the subframe ‘n-1’.

12.9.2 Scheduling availability of UE switching between Uu uplink and V2X sidelink

This clause contains the restrictions on the scheduling availability for V2X sidelink due to switching between Uu uplink and V2X sidelink. For NR V2X sidelink, the assumed number of configured symbols in a slot is 14.

When switch from Uu uplink slot to V2X sidelink slot occurs in sidelink slot ‘n’,

- UE is not expected to transmit or receive on V2X sidelink on the sidelink slot ‘n’.

When switch from V2X sidelink slot to Uu uplink slot occurs in sidelink slot ‘n-1’,

- UE is not expected to transmit or receive on V2X sidelink on the sidelink slot ‘n-1’.

When switch from V2X sidelink slot to Uu uplink slot occurs in Uu slot ‘n’,

- UE is not expected to transmit uplink or receive downlink on the Uu slot ‘n’.

When switch from Uu uplink slot to V2X sidelink slot occurs in Uu slot ‘n-1’,

- UE is not expected to transmit uplink or receive downlink on the Uu slot ‘n-1’.

- UE is not expected to transmit uplink or receive downlink on the Uu slot ‘n-1’.

12.10 Selection / Reselection of relay UE

12.10.1 Introduction

This section contains the requirements related to selection and reselection of relay UE.

The requirements apply for the selection and reselection of candidate relay UEs that are transmitting relay discovery signals within the resource pool as configured for the remote UE.

12.10.2 Selection / Reselection of relay UE

For a remote UE configured by upper layer for relay operation, the remote UE shall search for candidate relay UEs for selection and/or reselection every discovery period which is determined by resource reservation period or SPS transmission periodicity configured by network.

If the remote UE has a selected sidelink relay UE, then the remote UE shall measure the SD-RSRP or SL-RSRP of the selected relay once in every four discovery periods and evaluate if it meets the relay selection criterion as defined in TS 38.331[2] (clause 5.8.15.3).

The remote UE shall measure SD-RSRP or SL-RSRP of the candidate relay UEs every $T_{measure, SL_Relay_Intra}$ for relay UEs that are detected and measured according to the measurement rules.

For intra-frequency relay UEs that are detected, but that has not been selected or reselected to, the remote UE shall be capable of evaluating that the intra-frequency relay UE has met selection or reselection criterion defined in TS 38.331[2] (clause 5.8.15.3) within $T_{evaluate, SL_Relay_Intra}$ as specified in table 12.10.2-1.

The minimum requirements are required to meet when the selected and candidate relay UEs are transmitting relay discovery message every discovery period.

Table 12.10.2-1: $T_{measure, SL_Relay_Intra}$ and $T_{evaluate, SL_Relay_Intra}$

Discovery Period [s]	$T_{measure,SL_Relay_Intra}$ [s] (number of discovery periods)	$T_{evaluate, SL_Relay_Intra}$ [s] (number of discovery periods)
0.04≤Discovery period≤10.24	Note 1 (4)	Note 1 (16)
Note 1: Time depends upon the discovery period which is resource reservation period (in mode 2) or SPS transmission periodicity (in mode 1). Note 2: SL-RSRP or SD-RSRP can be derived from PSCCH-DMRS and/or PSSCH-DMRS.		

13 Measurement Performance Requirements for NR gNB

13.1 UL-RTOA

13.1.1 Report mapping

The reporting range of UL Relative Time of Arrival (UL-RTOA), as defined in Clause 5.2.2 of TS 38.215 [4], is defined from $-985024T_c$ to $+985024 \times T_c$. The reporting resolution is uniform across the reporting range and is defined as $T = T_c * 2^k$ where k is selected by gNB from the set {0, 1, 2, 3, 4, 5}.

T_c is defined in TS 38.211 [6].

LMF provides a recommended resolution parameter, *timingReportingGranularityFactor* [35]. gNB selects parameter k based on *timingReportingGranularityFactor* [35] and informs the LMF.

The mapping of measured quantity for each reporting resolution (k) is defined in Table 13.1.1-1 to Table 13.1.1-6.

Table 13.1.1-1: UL-RTOA measurement report mapping for reporting resolution of T_c (k=0)

Reported Value	Measured Quantity Value	Unit
UL_RTOA_0000	-985024 > UL_RTOA	T_c
UL_RTOA_0001	-985024 ≤ UL_RTOA < -985023	T_c
UL_RTOA_0002	-985023 ≤ UL_RTOA < -985022	T_c
…	…	…
UL_RTOA_985023	-2 ≤ UL_RTOA < -1	T_c

UL_RTOA_985024	-1 ≤ UL_RTOA ≤ 0	T_c
UL_RTOA_985025	0 < UL_RTOA ≤ 1	T_c
UL_RTOA_985026	1 < UL_RTOA ≤ 2	T_c
UL_RTOA_985027	2 < UL_RTOA ≤ 3	T_c
…	…	…
UL_RTOA_1970048	985023 < UL_RTOA ≤ 985024	T_c
UL_RTOA_1970049	985024 < UL_RTOA	T_c

Table 13.1.1-2: UL-RTOA measurement report mapping for reporting resolution of $2T_c$ (k=1)

Reported Value	Measured Quantity Value	Unit
UL_RTOA_0000	-985024 > UL_RTOA	T_c
UL_RTOA_0001	-985024 ≤ UL_RTOA < -985022	T_c
UL_RTOA_0002	-985022 ≤ UL_RTOA < -985020	T_c
…	…	…
UL_RTOA_492511	-4 ≤ UL_RTOA < -2	T_c
UL_RTOA_492512	-2 ≤ UL_RTOA ≤ 0	T_c
UL_RTOA_492513	0 < UL_RTOA ≤ 2	T_c
UL_RTOA_492514	2 < UL_RTOA ≤ 4	T_c
UL_RTOA_492515	4 < UL_RTOA ≤ 6	T_c
…	…	…
UL_RTOA_985024	985022 < UL_RTOA ≤ 985024	T_c
UL_RTOA_985025	985024 < UL_RTOA	T_c

Table 13.1.1-3: UL-RTOA measurement report mapping for reporting resolution of $4T_c$ (k=2)

Reported Value	Measured Quantity Value	Unit
UL_RTOA_0000	-985024 > UL_RTOA	T_c
UL_RTOA_0001	-985024 ≤ UL_RTOA < -985020	T_c
UL_RTOA_0002	-985020 ≤ UL_RTOA < -985018	T_c
…	…	…
UL_RTOA_246255	-8 ≤ UL_RTOA < -4	T_c
UL_RTOA_246256	-4 ≤ UL_RTOA ≤ 0	T_c
UL_RTOA_246257	0 < UL_RTOA ≤ 4	T_c
UL_RTOA_246258	4 < UL_RTOA ≤ 8	T_c
UL_RTOA_246259	8 < UL_RTOA ≤ 12	T_c
…	…	…
UL_RTOA_492512	985020 < UL_RTOA ≤ 985024	T_c
UL_RTOA_492513	985024 < UL_RTOA	T_c

Table 13.1.1-4: UL-RTOA measurement report mapping for reporting resolution of $8T_c$ (k=3)

Reported Value	Measured Quantity Value	Unit
UL_RTOA_0000	-985024 > UL_RTOA	T_c
UL_RTOA_0001	-985024 ≤ UL_RTOA < -985016	T_c
UL_RTOA_0002	-985016 ≤ UL_RTOA < -985008	T_c
…	…	…
UL_RTOA_123127	-16 ≤ UL_RTOA < -8	T_c
UL_RTOA_123128	-8 ≤ UL_RTOA ≤ 0	T_c
UL_RTOA_123129	0 < UL_RTOA ≤ 8	T_c
UL_RTOA_123130	8 < UL_RTOA ≤ 16	T_c
UL_RTOA_123131	16 < UL_RTOA ≤ 24	T_c
…	…	…
UL_RTOA_246256	985016 < UL_RTOA ≤ 985024	T_c
UL_RTOA_246257	985024 < UL_RTOA	T_c

Table 13.1.1-5: UL-RTOA measurement report mapping for reporting resolution of $16T_c$ (k=4)

Reported Value	Measured Quantity Value	Unit

UL_RTOA_0000	-985024 > UL_RTOA	T_c
UL_RTOA_0001	-985024 ≤ UL_RTOA < -985008	T_c
UL_RTOA_0002	-985008 ≤ UL_RTOA < -984992	T_c
…	…	…
UL_RTOA_61563	-32 ≤ UL_RTOA < -16	T_c
UL_RTOA_61564	-16 ≤ UL_RTOA ≤ 0	T_c
UL_RTOA_61565	0 < UL_RTOA ≤ 16	T_c
UL_RTOA_61566	16 < UL_RTOA ≤ 32	T_c
UL_RTOA_61567	32 < UL_RTOA ≤ 48	T_c
…	…	…
UL_RTOA_123128	985008 < UL_RTOA ≤ 985024	T_c
UL_RTOA_123129	985024 < UL_RTOA	T_c

Table 13.1.1-6: UL-RTOA measurement report mapping for reporting resolution of $32T_c$ (k=5)

Reported Value	Measured Quantity Value	Unit
UL_RTOA_0000	-985024 > UL_RTOA	T_c
UL_RTOA_0001	-985024 ≤ UL_RTOA < -984992	T_c
UL_RTOA_0002	-984992 ≤ UL_RTOA < -984960	T_c
…	…	…
UL_RTOA_30781	-64 ≤ UL_RTOA < -32	T_c
UL_RTOA_30782	-32 ≤ UL_RTOA ≤ 0	T_c
UL_RTOA_30783	0 < UL_RTOA ≤ 32	T_c
UL_RTOA_30784	32 < UL_RTOA ≤ 64	T_c
UL_RTOA_30785	64 < UL_RTOA ≤ 96	T_c
…	…	…
UL_RTOA_61564	984992 < UL_RTOA ≤ 985024	T_c
UL_RTOA_61565	985024 < UL_RTOA	T_c

13.1.1A Additional Path Report Mapping for UL-RTOA

The reporting range of additional path reporting for UL Relative Time of Arrival (UL-RTOA), as defined in Clause 5.2.2 of TS 38.215 [4], is defined from $-8175\times T_c$ to $+8175\times T_c$. The reporting resolution is uniform across the reporting range and is defined as $T = T_c*2^k$ where k is selected by gNB from the set {0, 1, 2, 3, 4, 5}.

T_c is defined in TS 38.211 [6].

LMF provides a recommended resolution parameter, *timingReportingGranularityFactor* [35]. gNB selects parameter k based on *timingReportingGranularityFactor* [35] and informs the LMF.

The mapping of measured quantity for each reporting resolution (k) is defined in Table 13.1.1A-1 to Table 13.1.1A-6.

Table 13.1.1A-1: UL-RTOA measurement report mapping for resolution of Tc (k=0)

Reported Quantity Value, path_i	Measured Quantity Value, Δpath	Unit
path_00000	Δpath < -8175	T_c
path_00001	-8175 ≤ Δpath < -8174	T_c
path_00002	-8174 ≤ Δpath < -8173	T_c
…	…	…
path_08175	-1 ≤ Δpath < 0	T_c
path_08176	0 ≤ Δpath < 1	T_c
…	…	…
path_ 16349	8173 ≤ Δpath < 8174	T_c
path_ 16350	8174 ≤ Δpath < 8175	T_c
path_ 16351	8175 ≤ Δpath	T_c

Table 13.1.1A-2: UL-RTOA measurement report mapping for resolution of 2Tc (k=1)

Reported Quantity Value, path_i	Measured Quantity Value, Δpath	Unit
path_0000	Δpath < -8175	T_c
path_0001	-8175 ≤ Δpath < -8173	T_c
path_0002	-8173 ≤ Δpath < -8171	T_c
…	…	…
path_4088	-1 ≤ Δpath < 1	T_c
…	…	…
path_8174	8171 ≤ Δpath < 8173	T_c
path_8175	8173 ≤ Δpath < 8175	T_c
path_8176	8175 ≤ Δpath	T_c

Table 13.1.1A-3: UL-RTOA measurement report mapping for resolution of 4Tc (k=2)

Reported Quantity Value, path_i	Measured Quantity Value, Δpath	Unit
path_0000	Δpath < -8174	T_c
path_0001	-8174 ≤ Δpath < -8170	T_c
path_0002	-8170 ≤ Δpath < -8166	T_c
…	…	…
path_2044	-2 ≤ Δpath < 2	T_c
…	…	…
path_4086	8166 ≤ Δpath < 8170	T_c
path_4087	8170 ≤ Δpath < 8174	T_c
path_4088	8174 ≤ Δpath	T_c

Table 13.1.1A-4: UL-RTOA measurement report mapping for resolution of 8Tc (k=3)

Reported Quantity Value, path_i	Measured Quantity Value, Δpath	Unit
path_0000	Δpath < -8172	T_c
path_0001	-8172 ≤ Δpath < -8164	T_c
path_0002	-8164 ≤ Δpath < -8156	T_c
…	…	…
path_1022	-4 ≤ Δpath < 4	T_c
…	…	…
path_2042	8156 ≤ Δpath < 8164	T_c
path_2043	8164 ≤ Δpath < 8172	T_c
path_2044	8172 ≤ Δpath	T_c

Table 13.1.1A -5: UL-RTOA measurement report mapping for resolution of 16Tc (k=4)

Reported Quantity Value, path_i	Measured Quantity Value, Δpath	Unit
path_0000	Δpath < -8168	T_c
path_0001	-8168 ≤ Δpath < -8152	T_c
path_0002	-8152 ≤ Δpath < -8136	T_c
…	…	…
path_511	-8 ≤ Δpath < 8	T_c
…	…	…
path_1020	8136 ≤ Δpath < 8152	T_c
path_1021	8152 ≤ Δpath < 8168	T_c
path_1022	8168 ≤ Δpath	T_c

Table 13.1.1A-6: UL-RTOA measurement report mapping for resolution of 32Tc (k=5)

Reported Quantity Value, path_i	Measured Quantity Value, Δpath	Unit
path_000	Δpath < -8160	T_c
path_001	-8160 ≤ Δpath < -8128	T_c
path_002	-8128 ≤ Δpath < -8096	T_c
…	…	…
path_256	0 ≤ Δpath < 32	T_c
…	…	…
path_509	8096 ≤ Δpath < 8128	T_c
path_510	8128 ≤ Δpath < 8160	T_c
path_511	8160 ≤ Δpath	T_c

13.2 gNB Rx-Tx time difference

13.2.1 Report mapping

The reporting range of gNB Rx-Tx time difference, as defined in Clause 5.2.3 of TS 38.215 [4], is defined from -985024T_c to +985024×T_c. The reporting resolution is uniform across the reporting range and is defined as $T = T_c*2^k$ where k is selected by gNB from the set {0, 1, 2, 3, 4, 5}.

T_c is defined in TS 38.211 [6].

LMF provides a recommended resolution parameter, *timingReportingGranularityFactor* [35]. gNB selects parameter k based on *timingReportingGranularityFactor* [35] and informs the LMF.

The mapping of measured quantity for each reporting resolution (k) is defined in Table 13.2.1-1 to Table 13.2.1-6.

Table 13.2.1-1: gNB Rx-Tx time difference measurement report mapping for reporting resolution of T_c (k=0)

Reported Value	Measured Quantity Value	Unit
RX-TX_0000	-985024 > RX-TX	T_c
RX-TX_0001	-985024 ≤ RX-TX < -985023	T_c
RX-TX_0002	-985023 ≤ RX-TX < -985022	T_c
…	…	…
RX-TX_985023	-2 ≤ RX-TX < -1	T_c
RX-TX_985024	-1 ≤ RX-TX ≤ 0	T_c
RX-TX_985025	0 < RX-TX ≤ 1	T_c
RX-TX_985026	1 < RX-TX ≤ 2	T_c
RX-TX_985027	2 < RX-TX ≤ 3	T_c
…	…	…
RX-TX_1970048	985023 < RX-TX ≤ 985024	T_c
RX-TX_1970049	985024 < RX-TX	T_c

Table 13.2.1-2: gNB Rx-Tx time difference measurement report mapping for reporting resolution of $2T_c$ (k=1)

Reported Value	Measured Quantity Value	Unit
RX-TX_0000	-985024 > RX-TX	T_c
RX-TX_0001	-985024 ≤ RX-TX < -985022	T_c
RX-TX_0002	-985022 ≤ RX-TX < -985020	T_c
…	…	…
RX-TX_492511	-4 ≤ RX-TX < -2	T_c
RX-TX_492512	-2 ≤ RX-TX ≤ 0	T_c
RX-TX_492513	0 < RX-TX ≤ 2	T_c
RX-TX_492514	2 < RX-TX ≤ 4	T_c
RX-TX_492515	4 < RX-TX ≤ 6	T_c

…	…	…
RX-TX_985024	985022 < RX-TX ≤ 985024	T_c
RX-TX_985025	985024 < RX-TX	T_c

Table 13.2.1-3: gNB Rx-Tx time difference measurement report mapping for reporting resolution of $4T_c$ (k=2)

Reported Value	Measured Quantity Value	Unit
RX-TX_0000	-985024 > RX-TX	T_c
RX-TX_0001	-985024 ≤ RX-TX < -985020	T_c
RX-TX_0002	-985020 ≤ RX-TX < -985018	T_c
…	…	…
RX-TX_246255	-8 ≤ RX-TX < -4	T_c
RX-TX_246256	-4 ≤ RX-TX ≤ 0	T_c
RX-TX_246257	0 < RX-TX ≤ 4	T_c
RX-TX_246258	4 < RX-TX ≤ 8	T_c
RX-TX_246259	8 < RX-TX ≤ 12	T_c
…	…	…
RX-TX_492512	985020 < RX-TX ≤ 985024	T_c
RX-TX_492513	985024 < RX-TX	T_c

Table 13.2.1-4: gNB Rx-Tx time difference measurement report mapping for reporting resolution of $8T_c$ (k=3)

Reported Value	Measured Quantity Value	Unit
RX-TX_0000	-985024 > RX-TX	T_c
RX-TX_0001	-985024 ≤ RX-TX < -985016	T_c
RX-TX_0002	-985016 ≤ RX-TX < -985008	T_c
…	…	…
RX-TX_123127	-16 ≤ RX-TX < -8	T_c
RX-TX_123128	-8 ≤ RX-TX ≤ 0	T_c
RX-TX_123129	0 < RX-TX ≤ 8	T_c
RX-TX_123130	8 < RX-TX ≤ 16	T_c
RX-TX_123131	16 < RX-TX ≤ 24	T_c
…	…	…
RX-TX_246256	985016 < RX-TX ≤ 985024	T_c
RX-TX_246257	985024 < RX-TX	T_c

Table 13.2.1-5: gNB Rx-Tx time difference measurement report mapping for reporting resolution of $16T_c$ (k=4)

Reported Value	Measured Quantity Value	Unit
RX-TX_0000	-985024 > RX-TX	T_c
RX-TX_0001	-985024 ≤ RX-TX < -985008	T_c
RX-TX_0002	-985008 ≤ RX-TX < -984992	T_c
…	…	…
RX-TX_61563	-32 ≤ RX-TX < -16	T_c
RX-TX_61564	-16 ≤ RX-TX ≤ 0	T_c
RX-TX_61565	0 < RX-TX ≤ 16	T_c
RX-TX_61566	16 < RX-TX ≤ 32	T_c
RX-TX_61567	32 < RX-TX ≤ 48	T_c
…	…	…
RX-TX_123128	985008 < RX-TX ≤ 985024	T_c
RX-TX_123129	985024 < RX-TX	T_c

Table 13.2.1-5: gNB Rx-Tx time difference measurement report mapping for reporting resolution of $32T_c$ (k=5)

Reported Value	Measured Quantity Value	Unit

RX-TX_0000	-985024 > RX-TX	T_c
RX-TX_0001	-985024 ≤ RX-TX < -984992	T_c
RX-TX_0002	-984992 ≤ RX-TX < -984960	T_c
…	…	…
RX-TX_30781	-64 ≤ RX-TX < -32	T_c
RX-TX_30782	-32 ≤ RX-TX ≤ 0	T_c
RX-TX_30783	0 < RX-TX ≤ 32	T_c
RX-TX_30784	32 < RX-TX ≤ 64	T_c
RX-TX_30785	64 < RX-TX ≤ 96	T_c
…	…	…
RX-TX_61564	984992 < RX-TX ≤ 985024	T_c
RX-TX_61565	985024 < RX-TX	T_c

13.2.1A Additional Path Report Mapping for gNB Rx-Tx

The reporting range of additional path for gNB Rx-Tx time difference, as defined in Clause 5.2.3 of TS 38.215 [4], is defined from -8175×T_c to 8175×T_c. The reporting resolution is uniform across the reporting range and is defined as $T = T_c*2^k$ where k is selected by gNB from the set {0, 1, 2, 3, 4, 5}.

T_c is defined in TS 38.211 [6].

LMF provides a recommended resolution parameter, *timingReportingGranularityFactor* [35]. gNB selects parameter k based on *timingReportingGranularityFactor* [35] and informs the LMF.

The mapping of measured quantity for each reporting resolution (k) is defined in Table 13.2.1A-1 to Table 13.2.1A-6.

Table 13.2.1A-1: gNB Rx-Tx time difference measurement report mapping for reporting resolution of T_c (k=0)

Reported Quantity Value, path_i	Measured Quantity Value, Δpath	Unit
path_00000	Δpath < -8175	T_c
path_00001	-8175 ≤ Δpath < -8174	T_c
path_00002	-8174 ≤ Δpath < -8173	T_c
…	…	…
path_08175	-1 ≤ Δpath < 0	T_c
path_08176	0 ≤ Δpath < 1	T_c
…	…	…
path_ 16349	8173 ≤ Δpath < 8174	T_c
path_ 16350	8174 ≤ Δpath < 8175	T_c
path_ 16351	8175 ≤ Δpath	T_c

Table 13.2.1A-2: gNB Rx-Tx time difference measurement report mapping for reporting resolution of $2T_c$ (k=1)

Reported Quantity Value, path_i	Measured Quantity Value, Δpath	Unit
path_0000	Δpath < -8175	T_c
path_0001	-8175 ≤ Δpath < -8173	T_c
path_0002	-8173 ≤ Δpath < -8171	T_c
…	…	…
path_4088	-1 ≤ Δpath < 1	T_c
…	…	…
path_8174	8171 ≤ Δpath < 8173	T_c
path_8175	8173 ≤ Δpath < 8175	T_c
path_8176	8175 ≤ Δpath	T_c

Table 13.2.1A-3: gNB Rx-Tx time difference measurement report mapping for reporting resolution of $4T_c$ (k=2)

Reported Quantity Value, path_i	Measured Quantity Value, Δpath	Unit
path_0000	Δpath < -8174	T_c
path_0001	-8174 ≤ Δpath < -8170	T_c
path_0002	-8170 ≤ Δpath < -8166	T_c
…	…	…
path_2044	-2 ≤ Δpath < 2	T_c
…	…	…
path_4086	8166 ≤ Δpath < 8170	T_c
path_4087	8170 ≤ Δpath < 8174	T_c
path_4088	8174 ≤ Δpath	T_c

Table 13.2.1A-4: gNB Rx-Tx time difference measurement report mapping for reporting resolution of $8T_c$ (k=3)

Reported Quantity Value, path_i	Measured Quantity Value, Δpath	Unit
path_0000	Δpath < -8172	T_c
path_0001	-8172 ≤ Δpath < -8164	T_c
path_0002	-8164 ≤ Δpath < -8156	T_c
…	…	…
path_1022	-4 ≤ Δpath < 4	T_c
…	…	…
path_2042	8156 ≤ Δpath < 8164	T_c
path_2043	8164 ≤ Δpath < 8172	T_c
path_2044	8172 ≤ Δpath	T_c

Table 13.2.1A-5: gNB Rx-Tx time difference measurement report mapping for reporting resolution of $16T_c$ (k=4)

Reported Quantity Value, path_i	Measured Quantity Value, Δpath	Unit
path_0000	Δpath < -8168	T_c
path_0001	-8168 ≤ Δpath < -8152	T_c
path_0002	-8152 ≤ Δpath < -8136	T_c
…	…	…
path_511	-8 ≤ Δpath < 8	T_c
…	…	…
path_1020	8136 ≤ Δpath < 8152	T_c
path_1021	8152 ≤ Δpath < 8168	T_c
path_1022	8168 ≤ Δpath	T_c

Table 13.2.1A-6: gNB Rx-Tx time difference measurement report mapping for reporting resolution of $32T_c$ (k=5)

Reported Quantity Value, path_i	Measured Quantity Value, Δpath	Unit
path_000	Δpath < -8160	T_c
path_001	-8160 ≤ Δpath < -8128	T_c
path_002	-8128 ≤ Δpath < -8096	T_c
…	…	…
path_256	0 ≤ Δpath < 32	T_c
…	…	…
path_509	8096 ≤ Δpath < 8128	T_c
path_510	8128 ≤ Δpath < 8160	T_c
path_511	8160 ≤ Δpath	T_c

13.2.2 Measurement Accuracy Requirements

13.2.2.1 Introduction

This clause defines accuracy requirements for gNB Rx-Tx time difference measurement in FR1 and FR2. The requirements are applicable for gNB supporting gNB Rx-Tx time difference measurement. The gNB, which declares the support for gNB Rx-Tx time difference measurement also declares that it meets gNB Rx-Tx time difference accuracy requirements at least for one side condition Ês/Iot ≥ +3 dB or Ês/Iot ≥ -13 dB.

13.2.2.2 Requirements

The accuracy requirements for gNB Rx-Tx time difference measurement shall be within ±(X+Y) T_c under the following conditions:

- AWGN propagation conditions.
- The measured signals are in the directions covered by RoAoA of OTA reference sensitivity requirements for gNB type 1-O and 2-O BS

where

- X is defined in Table 13.2.2.2-1 for gNB types 1-C, 1-H and 1-O and in Table 13.2.2.2-2 for gNB type 2-O.
- Y is declared by manufacturer and can be different for different gNB types 1-C, 1-H, 1-O and 2-O.

Note: The measurement accuracy requirements in Table 13.2.2.2-1 and Table 13.2.2.2-2 are defined under an assumption that gNB is not mandated to perform receive beam sweeping.

Table 13.2.2.2-1: gNB Rx-Tx time difference absolute accuracy in FR1 for gNB type 1-C, 1-H and 1-O

Accuracy	SRS Ês/Iot	SCS	SRS bandwidth range
Unit: Tc	Unit: dB	Unit: kHz	Unit: RB
123	≥ -13	15	44 ≤ BW ≤ 84
48			88 ≤ BW ≤ 168
17			176 ≤ BW
122	≥ +3		24 ≤ BW ≤ 40
62			44 ≤ BW ≤ 84
32			88 ≤ BW ≤ 168
16			176 ≤ BW
42	≥ -13	30	48 ≤ BW ≤ 84
24			88 ≤ BW ≤ 168
8			176 ≤ BW
32	≥ +3		48 ≤ BW ≤ 84
17			88 ≤ BW ≤ 168
9			176 ≤ BW
21	≥ -13	60	48 ≤ BW ≤ 84
12			88 ≤ BW
16	≥ +3		48 ≤ BW ≤ 84
9			88 ≤ BW

Table 13.2.2.2-2: gNB Rx-Tx time difference absolute accuracy in FR2 for gNB type 2-O

Accuracy	SRS Ês/Iot	SCS	SRS bandwidth range
Unit: Tc	Unit: dB	Unit: kHz	Unit: RB
9	≥ -13	60	132 ≤ BW ≤ 168
8			176 ≤ BW
9	≥ +3		132 ≤ BW ≤ 168
8			176 ≤ BW
22	≥ -13	120	32 ≤ BW ≤ 40
15			44 ≤ BW ≤ 84
8			88 ≤ BW
16	≥ +3		32 ≤ BW ≤ 40
9			44 ≤ BW ≤ 84

8			88 ≤ BW

13.3 UL SRS RSRP measurement

13.3.1 Report mapping

The reporting range of UL SRS RSRP, as defined in clause 5.2.5 of 38.215 [4], is defined from -156dBm to -31dBm with resolution 1dB.

The mapping of measured quantity is defined in Table 13.3.1-1. The range in the signalling may be larger than the guaranteed accuracy range.

Table 13.3.1-1: UL SRS RSRP report mapping

Reported value	Measured quantity value	Unit
SRS_RSRP_0	SRS-RSRP<-156	dBm
SRS_RSRP_1	-156≤SRS-RSRP<-155	dBm
SRS_RSRP_2	-155≤SRS-RSRP<-154	dBm
SRS_RSRP_3	-154≤SRS-RSRP<-153	dBm
SRS_RSRP_4	-153≤SRS-RSRP<-152	dBm
SRS_RSRP_5	-152≤SRS-RSRP<-151	dBm
SRS_RSRP_6	-151≤SRS-RSRP<-150	dBm
SRS_RSRP_7	-150≤SRS-RSRP<-149	dBm
SRS_RSRP_8	-149≤SRS-RSRP<-148	dBm
SRS_RSRP_9	-148≤SRS-RSRP<-147	dBm
SRS_RSRP_10	-147≤SRS-RSRP<-146	dBm
SRS_RSRP_11	-146≤SRS-RSRP<-145	dBm
SRS_RSRP_12	-145≤SRS-RSRP<-144	dBm
SRS_RSRP_13	-144≤SRS-RSRP<-143	dBm
SRS_RSRP_14	-143≤SRS-RSRP<-142	dBm
SRS_RSRP_15	-142≤SRS-RSRP<-141	dBm
SRS_RSRP_16	-141≤SRS-RSRP<-140	dBm
SRS_RSRP_17	-140≤SRS-RSRP<-139	dBm
SRS_RSRP_18	-139≤SRS-RSRP<-138	dBm
…	…	…
SRS_RSRP_111	-46≤SRS-RSRP<-45	dBm
SRS_RSRP_112	-45≤SRS-RSRP<-44	dBm
SRS_RSRP_113	-44≤SRS-RSRP<-43	dBm
SRS_RSRP_114	-43≤SRS-RSRP<-42	dBm
SRS_RSRP_115	-42≤SRS-RSRP<-41	dBm
SRS_RSRP_116	-41≤SRS-RSRP<-40	dBm
SRS_RSRP_117	-40≤SRS-RSRP<-39	dBm
SRS_RSRP_118	-39≤SRS-RSRP<-38	dBm
SRS_RSRP_119	-38≤SRS-RSRP<-37	dBm
SRS_RSRP_120	-37≤SRS-RSRP<-36	dBm
SRS_RSRP_121	-36≤SRS-RSRP<-35	dBm
SRS_RSRP_122	-35≤SRS-RSRP<-34	dBm
SRS_RSRP_123	-34≤SRS-RSRP<-33	dBm
SRS_RSRP_124	-33≤SRS-RSRP<-32	dBm
SRS_RSRP_125	-32≤SRS-RSRP<-31	dBm
SRS_RSRP_126	-31≤SRS-RSRP	dBm

13.3.2 Measurement accuracy requirements

13.3.2.1 Introduction

This clause defines accuracy requirements for SRS-RSRP measurement in FR1 and FR2. The requirements are applicable for gNB supporting SRS-RSRP measurement. The gNB, which declares the support for SRS-RSRP

measurement also declares that it meets SRS-RSRP accuracy requirements at least for one side condition Ês/Iot ≥ +3 dB or Ês/Iot ≥ -13 dB.

13.3.2.2 Requirements

The accuracy requirements in Table 13.3.2.2-1, Table 13.3.2.2-2 and Table 13.3.2.2-3 are valid under the following conditions:

- AWGN propagation conditions.
- The measured signals are in the directions covered by RoAoA of OTA reference sensitivity requirements for gNB type 1-O and 2-O BS

Note: The measurement accuracy requirements in Table 13.3.2.2-1, Table 13.3.2.2-2 and Table 13.3.2.2-3 are defined under an assumption that gNB is not mandated to perform receive beam sweeping.

Table 13.3.2.2-1 gNB SRS-RSRP absolute accuracy requirements in FR1 for gNB type 1-C

Accuracy	Conditions	
	SRS Ês/Iot	SRS bandwidth range
dB	dB	RB
±4	Ês/Iot ≥ +3	24 ≤ BW < 48
±4		48 ≤ BW < 132
±4		132 ≤ BW
±6.5	Ês/Iot ≥ -13	48 ≤ BW < 132
±5.5		132 ≤ BW

Table 13.3.2.2-2 gNB SRS-RSRP absolute accuracy requirements in FR1 for gNB type 1-H and 1-O

Accuracy	Conditions	
	SRS Ês/Iot	SRS bandwidth range
dB	dB	RB
±5.5	Ês/Iot ≥ +3	24 ≤ BW < 48
±5.5		48 ≤ BW < 132
±5.5		132 ≤ BW
±8	Ês/Iot ≥ -13	48 ≤ BW < 132
±7		132 ≤ BW

Table 13.3.2.2-3 gNB SRS-RSRP absolute accuracy requirements in FR2 for gNB type 2-O

Accuracy	Conditions	
	SRS Ês/Iot	SRS bandwidth range
dB	dB	RB
±5.5	Ês/Iot ≥ +3	32 ≤ BW < 64
±5.5		64 ≤ BW < 132
±5.5		132 ≤ BW
±8	Ês/Iot ≥ -13	64 ≤ BW < 132
±7		132 ≤ BW

13.4 AoA/ZoA

13.4.1 Report mapping

The reporting range of UL Angle of Arrival (UL-AoA), as defined in Clause 5.2.4 of TS 38.215 [4], is defined from -180 degree to +180 degree for azimuth angle of arrival (A-AoA). The reporting resolution is 0.1 degree.

The reporting range of UL Angle of Arrival, as defined in Clause 5.2.4 of TS 38.215 [4], is defined from 0 degree to +180 degree for zenith angle of arrival (Z-AoA). The reporting resolution is 0.1 degree.

The mapping of A-AoA measured quantity is defined in Table 13.4.1-1. The mapping of Z-AoA measured quantity is defined in Table 13.4.1-2.

Table 13.4.1-1: Azimuth Angle of Arrival (A-AoA) measurement report mapping

Reported value	Measured quantity value (AoA)	Unit
A-AoA_0	-180 ≤ A-AoA < -179.9	degree
A-AoA_1	-179.9 ≤ A-AoA < -179.8	degree
A-AoA_2	-179.8 ≤ A-AoA < -179.7	degree
…	…	…
A-AoA_1798	-0.2 ≤ A-AoA < -0.1	degree
A-AoA_1799	-0.1 ≤ A-AoA < 0	degree
A-AoA_1800	0 ≤ A-AoA < 0.1	degree
A-AoA_1801	0.1 ≤ A-AoA < 0.2	degree
A-AoA_1802	0.2 ≤ A-AoA < 0.3	degree
…	…	…
A-AoA_3598	179.8 ≤ A-AoA < 179.9	degree
A-AoA_3599	179.9 ≤ A-AoA < 180	degree

Table 13.4.1-2: Zenith Angle of Arrival (Z-AoA) measurement report mapping

Reported value	Measured quantity value (ZoA)	Unit
Z-AoA_0	0 ≤ Z-AoA < 0.1	degree
Z-AoA _1	0.1 ≤ Z-AoA < 0.2	degree
Z-AoA _2	0.2 ≤ Z-AoA < 0.3	degree
…	…	…
Z-AoA _1798	179.8 ≤ Z-AoA < 179.9	degree
Z-AoA _1799	179.9 ≤ Z-AoA ≤ 180	degree

13.5 Timing advance (T_{ADV})

13.5.1 Report mapping

The reporting range of T_{ADV}, as defined in Clause 5.2.7 of TS 38.215 [4], is defined from 0 to 3150848 T_c with 128 T_c resolution for timing advance less or equal to 262144 T_c, and 512 T_c for timing advance greater than 262144 T_c.

T_c is defined in TS 38.211 [6].

The mapping of measured quantity is defined in Table 13.5.1-1.

Table 13.5.1-1: T_{ADV} measurement report mapping

Reported value	Measured quantity value	Unit
TIME_ADVANCE_00	$T_{ADV} < 128$	T_c
TIME_ADVANCE_01	$128 \le T_{ADV} < 256$	T_c
TIME_ADVANCE_02	$256 \le T_{ADV} < 384$	T_c
…	…	…
TIME_ADVANCE_2046	$261888 \le T_{ADV} < 262016$	T_c
TIME_ADVANCE_2047	$262016 \le T_{ADV} < 262144$	T_c

TIME_ADVANCE_2048	$262144 \le T_{ADV} < 262656$	T_c
TIME_ADVANCE_2049	$262656 \le T_{ADV} < 263168$	T_c
…	…	…
TIME_ADVANCE_7688	$3149824 \le T_{ADV} < 3150336$	T_c
TIME_ADVANCE_7689	$3150336 \le T_{ADV} < 3150848$	T_c
TIME_ADVANCE_7690	$3150848 \le T_{ADV}$	T_c

NOTE: For report mapping, T_{ADV} is equal to (gNB Rx – Tx time difference) + N_{TA_offset}, where N_{TA_offset} is based on the information *n-TimingAdvanceOffset* as specified in TS 38.331 [2].

13.6 UL SRS RSRPP measurement

13.6.1 Report mapping

The reporting range of UL SRS RSRPP, as defined in clause 5.2.5 of 38.215 [4], is defined from -156dBm to -31dBm with resolution 1dB.

The mapping of measured quantity is defined in Table 13.6.1-1. The range in the signalling may be larger than the guaranteed accuracy range.

Table 13.6.1-1: UL SRS RSRPP report mapping

Reported value	Measured quantity value	Unit
SRS_RSRPP_0	SRS-RSRPP<-156	dBm
SRS_RSRPP_1	-156≤SRS-RSRPP<-155	dBm
SRS_RSRPP_2	-155≤SRS-RSRPP<-154	dBm
SRS_RSRPP_3	-154≤SRS-RSRPP<-153	dBm
SRS_RSRPP_4	-153≤SRS-RSRPP<-152	dBm
SRS_RSRPP_5	-152≤SRS-RSRPP<-151	dBm
SRS_RSRPP_6	-151≤SRS-RSRPP<-150	dBm
SRS_RSRPP_7	-150≤SRS-RSRPP<-149	dBm
SRS_RSRPP_8	-149≤SRS-RSRPP<-148	dBm
SRS_RSRPP_9	-148≤SRS-RSRPP<-147	dBm
SRS_RSRPP_10	-147≤SRS-RSRPP<-146	dBm
SRS_RSRPP_11	-146≤SRS-RSRPP<-145	dBm
SRS_RSRPP_12	-145≤SRS-RSRPP<-144	dBm
SRS_RSRPP_13	-144≤SRS-RSRPP<-143	dBm
SRS_RSRPP_14	-143≤SRS-RSRPP<-142	dBm
SRS_RSRPP_15	-142≤SRS-RSRPP<-141	dBm
SRS_RSRPP_16	-141≤SRS-RSRPP<-140	dBm
SRS_RSRPP_17	-140≤SRS-RSRPP<-139	dBm
SRS_RSRPP_18	-139≤SRS-RSRPP<-138	dBm
…	…	…
SRS_RSRPP_111	-46≤SRS-RSRPP<-45	dBm
SRS_RSRPP_112	-45≤SRS-RSRPP<-44	dBm
SRS_RSRPP_113	-44≤SRS-RSRPP<-43	dBm
SRS_RSRPP_114	-43≤SRS-RSRPP<-42	dBm
SRS_RSRPP_115	-42≤SRS-RSRPP<-41	dBm

SRS_RSRPP_116	-41≤SRS-RSRPP<-40	dBm
SRS_RSRPP_117	-40≤SRS-RSRPP<-39	dBm
SRS_RSRPP_118	-39≤SRS-RSRPP<-38	dBm
SRS_RSRPP_119	-38≤SRS-RSRPP<-37	dBm
SRS_RSRPP_120	-37≤SRS-RSRPP<-36	dBm
SRS_RSRPP_121	-36≤SRS-RSRPP<-35	dBm
SRS_RSRPP_122	-35≤SRS-RSRPP<-34	dBm
SRS_RSRPP_123	-34≤SRS-RSRPP<-33	dBm
SRS_RSRPP_124	-33≤SRS-RSRPP<-32	dBm
SRS_RSRPP_125	-32≤SRS-RSRPP<-31	dBm
SRS_RSRPP_126	-31≤SRS-RSRPP	dBm

13.7 gNB Rx-Tx time difference measurements for RTT-based PDC

13.7.1 Report mapping

The reporting range of gNB Rx-Tx time difference, as defined in Clause 5.2.3 of TS 38.215 [4], is defined from -985024T_c to +985024×T_c. The reporting resolution is uniform across the reporting range and is defined as T_c*32.

T_c is defined in TS 38.211 [6].

The mapping of measured quantity is defined in Table 13.7.1-1.

Table 13.7.1-1: gNB Rx-Tx time difference measurement report mapping

Reported Value	Measured Quantity Value	Unit
RX-TX_0000	-985024 > RX-TX	T_c
RX-TX_0001	-985024 ≤ RX-TX < -984992	T_c
RX-TX_0002	-984992 ≤ RX-TX < -984960	T_c
…	…	…
RX-TX_30781	-64 ≤ RX-TX < -32	T_c
RX-TX_30782	-32 ≤ RX-TX ≤ 0	T_c
RX-TX_30783	0 < RX-TX ≤ 32	T_c
RX-TX_30784	32 < RX-TX ≤ 64	T_c
RX-TX_30785	64 < RX-TX ≤ 96	T_c
…	…	…
RX-TX_61564	984992 < RX-TX ≤ 985024	T_c
RX-TX_61565	985024 < RX-TX	T_c

13.7.2 Measurement Accuracy Requirements

13.7.2.1 Introduction

This clause defines accuracy requirements for gNB Rx-Tx time difference measurement in FR1 and FR2. The requirements are applicable for gNB supporting gNB Rx-Tx time difference measurement for RTT-based PDC.

13.7.2.2 Requirements

The accuracy requirements for gNB Rx-Tx time difference measurement for RTT-based PDC shall be within ±(X+Y) T_c under the following conditions:

- AWGN propagation conditions.

- The measured signals are in the directions covered by RoAoA of OTA reference sensitivity requirements for gNB type 1-O and 2-O BS

where

- X is defined in Table 13.7.2.2-1 for gNB types 1-C, 1-H and 1-O and in Table 13.7.2.2-2 for gNB type 2-O.
- Y is declared by manufacturer and can be different for different gNB types 1-C, 1-H, 1-O and 2-O.

Note: The measurement accuracy requirements in Table 13.7.2.2-1 and Table 13.7.2.2-2 are defined under an assumption that gNB is not mandated to perform receive beam sweeping.

Table 13.7.2.2-1: gNB Rx-Tx time difference absolute accuracy in FR1 for gNB type 1-C, 1-H and 1-O

Accuracy	SRS Ês/Iot	SCS	SRS bandwidth range
Unit: Tc	Unit: dB	Unit: kHz	Unit: RB
122	≥ +3	15	24 ≤ BW ≤ 40
62			44 ≤ BW ≤ 84
32			88 ≤ BW ≤ 168
16			176 ≤ BW
32		30	48 ≤ BW ≤ 84
17			88 ≤ BW ≤ 168
9			176 ≤ BW
16		60	48 ≤ BW ≤ 84
9			88 ≤ BW

Table 13.7.2.2-2: gNB Rx-Tx time difference absolute accuracy in FR2 for gNB type 2-O

Accuracy	SRS Ês/Iot	SCS	SRS bandwidth range
Unit: Tc	Unit: dB	Unit: kHz	Unit: RB
9	≥ +3	60	132 ≤ BW ≤ 168
8			176 ≤ BW
16		120	32 ≤ BW ≤ 40
9			44 ≤ BW ≤ 84
8			88 ≤ BW

Annex A (normative): Test Cases

A.1 Purpose of annex

A.2 Requirement classification for statistical testing

Requirements in this specification are either expressed as absolute requirements with a single value stating the requirement, or expressed as a success rate. There are no provisions for the statistical variations that will occur when the parameter is tested.

Annex A outlines the tests in more detail and lists the test parameters needed. The test will result in an outcome of a test variable value for the device under test (DUT) inside or outside the test limit. Overall, the probability of a "good" DUT being inside the test limit(s) and the probability of a "bad" DUT being outside the test limit(s) should be as high as possible. For this reason, when selecting the test variable and the test limit(s), the statistical nature of the test is accounted for.

The statistical nature depends on the type of requirement. Some have large statistical variations, while others are not statistical in nature at all. When testing a parameter with a statistical nature, a confidence level is set. This establishes the probability that a DUT passing the test actually meets the requirements and determines how many times a test has to be repeated and what the pass and fail criteria are. Those aspects are not covered by TS 38.133. The details of the tests on how many times to run it and how to establish confidence in the tests are described in TS 38.533 [5]. This Annex establishes the variable to be used in the test and whether it can be viewed as statistical in nature or not.

A.2.1 Types of requirements in TS 38.133

A.2.1.1 Time and delay requirements on UE higher layer actions

A very large part of the RRM requirements are delay requirements:

- In RRC_IDLE state mobility (clause A.6.1 and A.7.1) there is cell re-selection delay.
- In RRC_CONNECTED state mobility (clauses A.4.3, A.4.6, A.5.3, A.5.6, A.6.3, A.6.6, A.7.3 and A.7.6) there is handover delay, cell search delay and measurement reporting delay.
- In RRC Connection Control (clauses A.4.3.2, A.5.3.2, A.6.3.2 and A.7.3.2) there is RRC re-establishment delay.

All have in common that the UE is required to perform an action observable in higher layers (e.g. camp on the correct cell) within a certain time after a specific event (e.g. when a new strong pilot or reference signal appears). The delay time is statistical in nature for several reasons, among others that several of the measurements are performed by the UE in a fading radio environment.

The variations make a strict limit unsuitable for a test. Instead there is a condition set for a correct action by the UE, e.g. that the UE shall camp on the correct cell within X seconds. Then the rate of correct events is observed during repeated tests and a limit is set on the rate of correct events, usually 90% correct events are required. How the limit is applied in the test depends on the confidence required, further detailed are in TS 38.533 [5].

A.2.1.2 Measurements of power levels, relative powers and time

A very large number of requirements are on measurements that the UE performs:

- In RRC_CONNECTED state mobility (clauses A.4.3, A.5.3, A.6.3 and A.7.3) there are measurement reports.
- In Measurement Performance Requirements (clauses A.4.7, A.5.7, A.6.7 and A.7.7) there are requirements for all type of measurements.

The accuracy requirements on measurements are expressed in this specification as a fixed limit (e.g. +/-X dB), but the measurement error will have a distribution that is not easily confined in fixed limits. Assuming a Gaussian distribution of the error, the limits will have to be set at +/-3.29σ if the probability of failing a "good DUT" in a single test is to be kept at 0.1%. It is more reasonable to set the limit tighter and test the DUT by counting the rate of measurements that are within the limits, in a way similar to the requirements on delay.

A.2.1.3 Implementation requirements

A few requirements are strict actions the UE should take or capabilities the UE should have, without any allowance for deviations. These requirements are absolute and should be tested as such. Examples are:

- "Event triggered report rate" in RRC_CONNECTED state mobility (clauses A.4.3, A.4.6, A.5.3, A.5.6, A.6.3, A.6.6, A.7.3 and A.7.6)
- "Correct behaviour at time-out" in RRC connection control (clauses A.4.3.2, A.5.3.2, A.6.3.2 and A.7.3.2)

A.2.1.4 Physical layer timing requirements

There are requirements on Timing (clauses A.4.4, A.5.4, A.6.4 and A.7.4). There are both absolute and relative limits on timing accuracy depending upon the type of requirement. Examples are:

- Initial Transmit Timing (clauses A.4.4.1, A.5.4.1, A.6.4.1 and A.7.4.1) has an absolute limit on timing accuracy.
- Timing Advance (clauses A.4.4.2, A.5.4.2, A.6.4.2 and A.7.4.2) has a relative limit on timing accuracy.

A.2.1.5 Requirements under CCA

A few requirements include CCA failures in DL and or UL. Considering that the CCA model is of statistical nature, requirements that include CCA failures are always considered of statistical nature.

A.3 RRM test configurations

A.3.1 Reference measurement channels

A.3.1.1 PDSCH

A.3.1.1.1 FDD

Table A.3.1.1.1-1: PDSCH Reference Measurement Channels for SCS=15kHz

Parameter	Unit	Value						
Reference channel		SR.1.1 FDD						
Channel bandwidth	MHz	Defined in test case						
Number of transmitter antennas		1						
Allocated resource blocks for PDSCH Note 1		24						

Allocated slots per Radio Frame		10						
Radio frame containing SSB	slots	Note 5						
Radio frame not containing SSB	slots	10						
MCS index		4						
Modulation		QPSK						
Target Coding Rate		1/3						
Number of control symbols		2						
PDSCH mapping type		Type A						
Information Bit Payload								
For slots with RMSI Note 2	bits	1608						
For slots without RMSI	bits	1864						
Number of Code Blocks per slot		1						
Binary Channel Bits Per slot								
For slots with RMSI Note 2, Note 4	bits	5184						
For slots without RMSI Note 6	bits	6048						

Note 1: Allocated outside the SMTC duration in time and in resource blocks which do not overlap with the resource blocks allocated for SS/PBCH block.
Note 2: PDSCH is scheduled on the slots with RMSI.
Note 3: If necessary the information bit payload size can be adjusted to facilitate the test implementation. The payload sizes are defined in TS 38.213 [3].
Note 4: Derived based on the PDSCH DMRS assumption: dmrs-TypeA-Position=2, dmrs-Type=1, dmrs-AdditonalPositions=2, maxLength=1, Antenna port index: 1000, and Number of PDSCH DMRS CDM group(s) without data: 2.
Note 5: PDSCH is not scheduled in slots containing SSB according to the SSB configuration used in the test. SSB configurations are defined in clause A.3.10.
Note 6: Derived based on the PDSCH DMRS assumption: dmrs-TypeA-Position=2, dmrs-Type=1, dmrs-AdditonalPositions=2, maxLength=1, Antenna port index: 1000, and Number of PDSCH DMRS CDM group(s) without data: 1.
Note 7: When DRX is configured, PDCCH can be scheduled both for downlink assignment and/or UL grant only during ([10]ms - drx-InactivityTimer) from timing when drx-onDurationTimer starts, unless otherwise specified in the test case

A.3.1.1.2 TDD

Table A.3.1.1.2-1: PDSCH Reference Measurement Channels for SCS=15kHz

Parameter	Unit	Value						
Reference channel		SR.1.1 TDD	SR.1.2 TDD					
Channel bandwidth	MHz	Defined in test case	Defined in test case					
Number of transmitter antennas		1	1					
Allocated resource blocks for PDSCH Note 1		24	24					
Allocated slots per Radio Frame								
Radio frame containing SSB	slots	Note 5	Note 5					

Radio frame not containing SSB	slots	4	6					
MCS table		64QAM	64QAM					
MCS index		4	4					
Modulation		QPSK	QPSK					
Target Coding Rate		1/3	1/3					
Number of control symbols		2	2					
PDSCH mapping type		Type A	Type A					
Information Bit Payload								
For slots with RMSI Note 2	bits	1608	1608					
For slots without RMSI	bits	1864	1864					
For special slots	bits	N/A	1128					
Number of Code Blocks per slot		1	1					
Binary Channel Bits Per slot								
For slots with RMSI Note 2, Note 4	bits	5184	5184					
For slots without RMSI Note 6	bits	6048	6048					
For special slots Note 6	bits	-	3744					

Note 1: Allocated outside the SMTC duration in time and in resource blocks which do not overlap with the resource blocks allocated for SS/PBCH block.
Note 2: PDSCH is scheduled on the slots with RMSI.
Note 3: If necessary the information bit payload size can be adjusted to facilitate the test implementation. The payload sizes are defined in TS 38.213 [3].
Note 4: Derived based on the PDSCH DMRS assumption: dmrs-TypeA-Position=2, dmrs-Type=1, dmrs-AdditonalPositions=2, maxLength=1, Antenna port index: 1000, and Number of PDSCH DMRS CDM group(s) without data: 2.
Note 5: PDSCH is not scheduled in slots containing SSB according to the SSB configuration used in the test. SSB configurations are defined in clause A.3.10.
Note 6: Derived based on the PDSCH DMRS assumption: dmrs-TypeA-Position=2, dmrs-Type=1, dmrs-AdditonalPositions=2, maxLength=1, Antenna port index: 1000, and Number of PDSCH DMRS CDM group(s) without data: 1.
Note 7: When DRX is configured, PDCCH can be scheduled both for downlink assignment and/or UL grant only during ([10]ms - drx-InactivityTimer) from timing when drx-onDurationTimer starts, unless otherwise specified in the test case

Table A.3.1.1.2-2: PDSCH Reference Measurement Channels for SCS=30kHz

Parameter	Unit	Value						
Reference channel		SR.2.1 TDD						
Channel bandwidth	MHz	Defined in test case						
Number of transmitter antennas		1						
Allocated resource blocks for PDSCH Note 1		24						
Allocated slots per Radio Frame								
Radio frame containing SSB	slots	Note 5						
Radio frame not containing SSB	slots	10						
MCS table		64QAM						
MCS index		4						

Modulation		QPSK						
Target Coding Rate		1/3						
Number of control symbols		2						
PDSCH mapping type		Type A						
Information Bit Payload								
For slots with RMSI Note 2	bits	1608						
For slots without RMSI	bits	1864						
Number of Code Blocks per slot		1						
Binary Channel Bits Per slot								
For slots with RMSI Note 2, Note 4	bits	6048						

Note 1: Allocated outside the SMTC duration in time and in resource blocks which do not overlap with the resource blocks allocated for SS/PBCH block.
Note 2: PDSCH is scheduled on the slots with RMSI.
Note 3: If necessary the information bit payload size can be adjusted to facilitate the test implementation. The payload sizes are defined in TS 38.213 [3].
Note 4: Derived based on the PDSCH DMRS assumption: dmrs-TypeA-Position=2, dmrs-Type=1, dmrs-AdditonalPositions=2, maxLength=1, Antenna port index: 1000, and Number of PDSCH DMRS CDM group(s) without data: 2.
Note 5: PDSCH is not scheduled in slots containing SSB according to the SSB configuration used in the test. SSB configurations are defined in clause A.3.10.
Note 6: Derived based on the PDSCH DMRS assumption: dmrs-TypeA-Position=2, dmrs-Type=1, dmrs-AdditonalPositions=2, maxLength=1, Antenna port index: 1000, and Number of PDSCH DMRS CDM group(s) without data: 1.
Note 7: When DRX is configured, PDCCH can be scheduled both for downlink assignment and/or UL grant only during ([10]ms - drx-InactivityTimer) from timing when drx-onDurationTimer starts, unless otherwise specified in the test case

Table A.3.1.1.2-3: PDSCH Reference Measurement Channels for SCS=120kHz

Parameter	Unit	Value						
Reference channel		SR.3.1 TDD	SR.3.2 TDD	SR.3.3 TDD				
Channel bandwidth	MHz	100	100	100				
Number of transmitter antennas		1	1	1				
Allocated resource blocks for PDSCH		24 Note 1	24 Note 7	48 Note 7				
Allocated slots per Radio Frame								
Radio frame containing SSB	slots	Note 5	Note 5	Note 5				
Radio frame not containing SSB	slots	48	48	48				
MCS table		64QAM	64QAM	64QAM				
MCS index		4	4	4				
Modulation		QPSK	QPSK	QPSK				
Target Coding Rate		1/3	1/3	1/3				
Number of control symbols		2	2	2				
PDSCH mapping type		Type A	Type A	Type A				
Information Bit Payload								
For slots with RMSI	bits	1608	1608	3104				
For slots without RMSI	bits	1864	1864	3624				
Number of Code Blocks per slot		1	1	1				

Binary Channel Bits Per slot								
For slots with RMSI Note 4	bits	5184	5184	10368				
For slots without RMSI Note 6	bits	6048	6048	12096				

Note 1: Allocated in resource blocks which do not overlap with the resource blocks allocated for SS/PBCH block
Note 2: Void
Note 3: If necessary the information bit payload size can be adjusted to facilitate the test implementation. The payload sizes are defined in TS 38.213 [3].
Note 4: Derived based on the PDSCH DMRS assumption: dmrs-TypeA-Position=2, dmrs-Type=1, dmrs-AdditonalPositions=2, maxLength=1, Antenna port index: 1000, and Number of PDSCH DMRS CDM group(s) without data: 2.
Note 5: PDSCH is not scheduled in slots containing SSB according to the SSB configuration used in the test. SSB configurations are defined in clause A.3.10.
Note 6: Derived based on the PDSCH DMRS assumption: dmrs-TypeA-Position=2, dmrs-Type=1, dmrs-AdditonalPositions=2, maxLength=1, Antenna port index: 1000, and Number of PDSCH DMRS CDM group(s) without data: 1.
Note 7: Allocated in the same resource blocks as the CORESET.
Note 8: When DRX is configured, PDSCH is scheduled only while *drx-onDurationTimer* is running, unless otherwise specified in the test case.

A.3.1.2 CORESET for RMSI scheduling

A.3.1.2.1 FDD

Table A.3.1.2.1-1: RMSI CORESET Reference Channel for FDD with SCS=15KHz

Parameter	Unit	Value						
Reference channel		CR.1.1 FDD						
Channel bandwidth	MHz	Defined in test case						
Subcarrier spacing for RMSI CORESET	kHz	15						
Allocated resource blocks for RMSI CORESET Note 7		24						
Subcarrier spacing for SSB	kHz	15						
SSB and RMSI CORESET multiplexing configuration Note 7		Pattern 1						
Offset between SSB and RMSI CORESET Note 3, 7	RB	0 (Note8)						
Configuration of PDCCH monitoring occasions for RMSI CORESET Note 4		Index 4						
Number of transmitter antennas		1						
Duration of RMSI CORESET Note 7	symbols	2						
DCI Format Note 1		Note 2						
Aggregation level	CCE	8						
DMRS precoder granularity		6						
REG bundle size		6						
Mapping from REG to CCE		Distributed						
Cell ID		Note 5						
Payload (without CRC)	bits	Note 6						

Note 1: DCI formats are defined in TS 38.212.
Note 2: DCI format shall depend upon the test configuration.
Note 3: The offset is defined with respect to the subcarrier spacing of the CORESET from the smallest RB index of RMSI CORESET to the smallest RB index of the common RB overlapping with the first RB of the SS/PBCH block.
Note 4: The configuration of PDCCH monitoring occasions for RMSI CORESET is defined in Table 13-11 in TS 38.213 [3].
Note 5: Cell ID shall depend upon the test configuration.
Note 6: Payload size shall depend upon the test configuration.
Note 7: The configuration of set of resource blocks and slot symbols of control resource set for Type0-PDCCH search space corresponds to index 0 in Table 13-1 in TS 38.213 [3]
Note 8: Other values can be used to align with GSCN [13] as long as SSB does not overlap the RMC.

A.3.1.2.2 TDD

Table A.3.1.2.2-1: RMSI CORESET Reference Channel for TDD with SCS=15KHz

Parameter	Unit	Value						
Reference channel		CR.1.1 TDD						
Channel bandwidth	MHz	Defined in test case						
Subcarrier spacing	kHz	15						
Allocated resource blocks for RMSI CORESET Note 7		24						
SSB and RMSI CORESET multiplexing configuration Note 7		Pattern 1						
Offset between SSB and RMSI CORESET Note 3, 7	RB	0 (Note 8)						
Configuration of PDCCH monitoring occasions for RMSI CORESET Note 4		Index 4						
Number of transmitter antennas		1						
Duration of RMSI CORESET Note 7	symbols	2						
DCI Format Note 1		Note 2						
Aggregation level	CCE	8						
DMRS precoder granularity		6						
REG bundle size		6						
Mapping from REG to CCE		Distributed						
Cell ID		Note 5						
Payload (without CRC)	bits	Note 6						

Note 1: DCI formats are defined in TS 38.212.
Note 2: DCI format shall depend upon the test configuration.
Note 3: The offset is defined with respect to the subcarrier spacing of the CORESET from the smallest RB index of RMSI CORESET to the smallest RB index of the common RB overlapping with the first RB of the SS/PBCH block.
Note 4: The configuration of PDCCH monitoring occasions for RMSI CORESET is defined in Table 13-11 in TS 38.213 [3].
Note 5: Cell ID shall depend upon the test configuration.
Note 6: Payload size shall depend upon the test configuration.
Note 7: The configuration of set of resource blocks and slot symbols of control resource set for Type0-PDCCH search space corresponds to index 0 in Table 13-1 in TS 38.213 [3].
Note 8: Other values can be used to align with GSCN [13] as long as SSB does not overlap the RMC.

Table A.3.1.2.2-2: RMSI CORESET Reference Channel for TDD with SCS=30KHz

Parameter	Unit	Value						
Reference channel		CR.2.1 TDD						
Channel bandwidth	MHz	Defined in test case						
Subcarrier spacing	kHz	30						
Allocated resource blocks for RMSI CORESET Note 7		24						
SSB and RMSI CORESET multiplexing configuration Note 7		Pattern 1						
Offset between SSB and RMSI CORESET Note 3, 7	RB	0 (Note 8)						
Configuration of PDCCH monitoring occasions for RMSI CORESET Note 4		Index 4						
Number of transmitter antennas		1						
Duration of RMSI CORESET Note 7	symbols	2						
DCI Format Note 1		Note 2						
Aggregation level	CCE	8						
DMRS precoder granularity		6						
REG bundle size		6						
Mapping from REG to CCE		Distributed						
Cell ID		Note 5						
Payload (without CRC)	bits	Note 6						

Note 1: DCI formats are defined in TS 38.212.
Note 2: DCI format shall depend upon the test configuration.
Note 3: The offset is defined with respect to the subcarrier spacing of the CORESET from the smallest RB index of RMSI CORESET to the smallest RB index of the common RB overlapping with the first RB of the SS/PBCH block.
Note 4: The configuration of PDCCH monitoring occasions for RMSI CORESET is defined in Table 13-11 in TS 38.213 [3].
Note 5: Cell ID shall depend upon the test configuration.
Note 6: Payload size shall depend upon the test configuration.
Note 7: The configuration of set of resource blocks and slot symbols of control resource set for Type0-PDCCH search space corresponds to index 0 in Table 13-6 in TS 38.213 [3].
Note 8: Other values can be used to align with GSCN [13] as long as SSB does not overlap the RMC.

Table A.3.1.2.2-3: RMSI CORESET Reference Channel for TDD with SCS=120KHz

Parameter	Unit	Value						
Reference channel		CR.3.1 TDD	CR.3.2 TDD					
Channel bandwidth	MHz	100	100					
Subcarrier spacing	kHz	120	120					
Allocated resource blocks for RMSI CORESET		24 Note 7	48 Note 9					
SSB and RMSI CORESET multiplexing configuration		Pattern 1 Note 7	Pattern 1 Note 9					
Offset between SSB and RMSI CORESET Note 3	RB	0 (Note 8) Note 7	0 (Note 8) Note 9					

Configuration of PDCCH monitoring occasions for RMSI CORESET Note 4		Index 4	Index 4					
Number of transmitter antennas		1	1					
Duration of RMSI CORESET	symbols	2 Note 7	2 Note 9					
DCI Format Note 1		Note 2	Note 2					
Aggregation level	CCE	8	8					
DMRS precoder granularity		6	6					
REG bundle size		6	6					
Mapping from REG to CCE		Distributed	Distributed					
Cell ID		Note 5	Note 5					
Payload (without CRC)	bits	Note 6	Note 6					

Note 1: DCI formats are defined in TS 38.212.
Note 2: DCI format shall depend upon the test configuration.
Note 3: The offset is defined with respect to the subcarrier spacing of the CORESET from the smallest RB index of RMSI CORESET to the smallest RB index of the common RB overlapping with the first RB of the SS/PBCH block.
Note 4: The configuration of PDCCH monitoring occasions for RMSI CORESET is defined in Table 13-12 in TS 38.213 [3].
Note 5: Cell ID shall depend upon the test configuration.
Note 6: Payload size shall depend upon the test configuration.
Note 7: The configuration of set of resource blocks and slot symbols of control resource set for Type0-PDCCH search space corresponds to index 0 in Table 13-8 in TS 38.213 [3].
Note 8: Other values can be used to align with GSCN [13] as long as SSB does not overlap the RMC.
Note 9: The configuration of set of resource blocks and slot symbols of control resource set for Type0-PDCCH search space corresponds to index 2 in Table 13-10 in TS 38.213 [3].

A.3.1.3 CORESET for RMC scheduling

A.3.1.3.1 FDD

Table A.3.1.3.1-1: Control Channel RMC for FDD with SCS=15KHz

Parameter	Unit	Value						
Reference channel		CCR.1.1 FDD	CCR.1.2 FDD	CCR.1.3 FDD	CCR.1.4 FDD	CCR.1.5 FDD		
Channel bandwidth	MHz	Defined in test case	Defined in test case	Defined in test case	Defined in test case	10		
Subcarrier spacing	kHz	15	15	15	15	15		
Allocated resource blocks for CORESET Note 3		24	18	24	18	24		
Number of transmitter antennas		1	1	1	1	1		
Duration of CORESET	symbols	2	2	2	2	2		
monitoringSymbolsWithinSlot		1100000 0000000	1100000 0000000	1100000 0000000	1100000 0000000	0011000 0000000		
REG bundle size		6	6	6	6	6		
DMRS precoder granularity		Same as REG bundle size	Same as REG bundle size	Same as REG bundle size	Same as REG bundle size	Same as REG bundle size		
CCE to REG mapping		Interleaved	Interleaved	Interleaved	Interleaved	Interleaved		
Interleave n_shift		0	0	0	0	0		

Interleave size		2	2	2	2	2		
Beamforming Pre-Coder		N/A	N/A	N/A	N/A	N/A		
Aggregation level	CCE	4	2	8	4	4		
DCI formats		Note 1	Note 1	Note 1	Note 1	Note 1		
Payload size (without CRC)	bits	Note 2	Note 2	Note 2	Note 2	Note 2		
Note 1: DCI format shall depend upon the test configuration. Note 2: Payload size shall depend upon the test configuration Note 3: Allocated in the resource blocks where the associated RMC is scheduled.								

A.3.1.3.2 TDD

Table A.3.1.3.2-1: Control Channel RMC for TDD with SCS=15KHz

Parameter	Unit	Value						
Reference channel		CCR.1.1 TDD	CCR.1.2 TDD	CCR.1.3 TDD	CCR.1.4 TDD	CCR.1.5 TDD		
Channel bandwidth	MHz	Defined in test case	Defined in test case	Defined in test case	Defined in test case	10		
Subcarrier spacing	kHz	15	15	15	15	15		
Allocated resource blocks for CORESET Note 3		24	18	24	18	18		
Number of transmitter antennas		1	1	1	1	1		
Duration of CORESET	symbols	2	2	2	2	2		
monitoringSymbolsWithinSlot		11000000000000	11000000000000	11000000000000	11000000000000	00110000000000		
REG bundle size		6	6	6	6	6		
DMRS precoder granularity		Same as REG bundle size	Same as REG bundle size	Same as REG bundle size	Same as REG bundle size	Same as REG bundle size		
CCE to REG mapping		Interleaved	Interleaved	Interleaved	Interleaved	Interleaved		
Interleave n_shift		0	0	0	0	0		
Interleave size		2	2	2	2	2		
Beamforming Pre-Coder		N/A	N/A	N/A	N/A	N/A		
Aggregation level	CCE	4	2	8	4	4		
DCI formats		Note 1	Note 1	Note 1	Note 1	Note 1		
Payload size (without CRC)	bits	Note 2	Note 2	Note 2	Note 2	Note 2		
Note 1: DCI format shall depend upon the test configuration. Note 2: Payload size shall depend upon the test configuration Note 3: Allocated in the resource blocks where the associated RMC is scheduled.								

Table A.3.1.3.2-2: Control Channel RMC for TDD with SCS=30KHz

Parameter	Unit	Value						
Reference channel		CCR.2.1 TDD	CCR.2.2 TDD	CCR.2.3 TDD	CCR.2.4 TDD			
Channel bandwidth	MHz	Defined in test case	Defined in test case	Defined in test case	Defined in test case			
Subcarrier spacing	kHz	30	30	30	30			
Allocated resource blocks for CORESET Note 3		24	24	18	18			

Number of transmitter antennas		1	1	1	1			
Duration of CORESET	symbols	2	2	2	2			
REG bundle size		6	6	6	6			
DMRS precoder granularity		Same as REG bundle size	Same as REG bundle size	Same as REG bundle size	Same as REG bundle size			
CCE to REG mapping		Interleaved	Interleaved	Interleaved	Interleaved			
Interleave n_shift		0	0	0	0			
Interleave size		2	2	2	2			
Beamforming Pre-Coder		N/A	N/A	N/A	N/A			
Aggregation level	CCE	4	8	4	2			
DCI formats		Note 1	Note 1	Note 1	Note 1			
Payload size (without CRC)	bits	Note 2	Note 2	Note 2	Note 2			
Note 1: DCI format shall depend upon the test configuration. Note 2: Payload size shall depend upon the test configuration. Note 3: Allocated in the same resource blocks where the associated RMC is scheduled.								

Table A.3.1.3.2-3: Control Channel RMC for TDD with SCS=120KHz

Parameter	Unit	Value						
Reference channel		CCR.3.1 TDD	CCR.3.2 TDD	CCR.3.3 TDD	CCR.3.4 TDD	CCR.3.5 TDD	CCR.3.6 TDD	CCR.3.7 TDD
Channel bandwidth	MHz	100	100	100	100	100	100	100
Subcarrier spacing	kHz	120	120	120	120	120	120	120
Allocated resource blocks for CORESET Note 3		24	24	24	24	24	24	48
Number of transmitter antennas		1	1	1	1	1	1	1
monitoringSlotPeriodicityAndOffset Note 4		sl160 0	sl160 0	sl160 80	sl160 0	sl160 0	sl160 80	sl160 0
monitoringSymbolsWithinSlot		11000000000000	00110000000000	11000000000000	10000000000000	00100000000000	10000000000000	11000000000000
Duration of CORESET	slot	1	1	1	2	2	2	1
REG bundle size		6	6	6	6	6	6	6
DMRS precoder granularity		Same as REG bundle size	Same as REG bundle size	Same as REG bundle size	Same as REG bundle size	Same as REG bundle size	Same as REG bundle size	Same as REG bundle size
CCE to REG mapping		Interleaved	Interleaved	Interleaved	Interleaved	Interleaved	Interleaved	Interleaved
Interleave n_shift		0	0	0	0	0	0	0
Interleave size		2	2	2	2	2	2	2
Beamforming Pre-Coder		N/A	N/A	N/A	N/A	N/A	N/A	N/A
Aggregation level	CCE	4	4	4	8	8	8	4
DCI formats		Note 1	Note 1	Note 1	Note 1	Note 1	Note 1	Note 1
Payload size (without CRC)	bits	Note 2	Note 2	Note 2	Note 2	Note 2	Note 2	Note 2
Note 1: DCI format shall depend upon the test configuration. Note 2: Payload size shall depend upon the test configuration.								

Note 3: Allocated in the same resource blocks where the associated PDSCH RMC is scheduled.
Note 4: *monitoringSlotPeriodicityAndOffet* is set to "sl1 0" if it is specifically stated that cell(s) configured with one of the control channel RMCs above shall transmit PDCCHs continuously.

A.3.1.4 TDD UL/DL configuration

Table A.3.1.4-1: TDD UL/DL configuration for SCS=15kHz

Parameter	Unit	Value		
Reference channel		TDDConf.1.1	TDDConf.1.2	
referenceSubcarrierSpacing	kHz	15	15	
TDD UL/DL pattern 1 Note 2		'DSUU' S='10DL:2GP:2UL'	'DSUU' S=' 6DL: 2GP: 6UL'	
dl-UL-TransmissionPeriodicity	ms	4	4	
nrofDownlinkSlots		1	1	
nrofDownlinkSymbols		10	6	
nrofUplinkSlot		2	2	
nrofUplinkSymbols		2	6	
TDD UL/DL pattern 2 Note 2		'D'	'D'	
dl-UL-TransmissionPeriodicity	ms	1	1	
nrofDownlinkSlots		1	1	
nrofDownlinkSymbols		0	0	
nrofUplinkSlot		0	0	
nrofUplinkSymbols		0	0	
Note 1: As specified in TS 38.213 [3] and TS 38.331 [2]. Note 2: For information				

Table A.3.1.4-2: TDD UL/DL configuration for SCS=30kHz

Parameter	Unit	Value		
Reference channel		TDDConf.2.1	TDDConf.2.2	TDDConf.2.3
referenceSubcarrierSpacing	kHz	30	30	30
TDD UL/DL pattern 1 Note 2		'3D1S4U' S='6DL:4GP:4UL'	'1D1S2U' S='11DL: 1GP:2UL'	'3D1S4U' S='4DL:4GP:6UL'
dl-UL-TransmissionPeriodicity	ms	4	2	4
nrofDownlinkSlots		3	1	3
nrofDownlinkSymbols		6	11	4
nrofUplinkSlot		4	2	4
nrofUplinkSymbols		4	2	6
TDD UL/DL pattern 2 Note 2		'DD'	Not configured	'DD'
dl-UL-TransmissionPeriodicity	ms	1	Not configured	1
nrofDownlinkSlots		2	Not configured	2
nrofDownlinkSymbols		0	Not configured	0
nrofUplinkSlot		0	Not configured	0
nrofUplinkSymbols		0	Not configured	0
Note 1: As specified in TS 38.213 [3] and TS 38.331 [2]. Note 2: For information				

Table A.3.1.4-3: TDD UL/DL configuration for SCS=120kHz

Parameter	Unit	Value		
Reference channel		TDDConf.3.1	TDDConf.3.2	
referenceSubcarrierSpacing	kHz	120	120	
TDD UL/DL pattern 1 Note 2		'DDDSU' S='10DL:2GP:2UL'	'DDDSU' S=' 6DL: 2GP: 6UL'	
dl-UL-TransmissionPeriodicity	ms	0.625	0.625	
nrofDownlinkSlots		3	3	
nrofDownlinkSymbols		10	6	
nrofUplinkSlot		1	1	
nrofUplinkSymbols		2	6	
TDD UL/DL pattern 2 Note 2		Not configured	Not configured	
dl-UL-TransmissionPeriodicity	ms	Not configured	Not configured	
nrofDownlinkSlots		Not configured	Not configured	
nrofDownlinkSymbols		Not configured	Not configured	
nrofUplinkSlot		Not configured	Not configured	
nrofUplinkSymbols		Not configured	Not configured	
Note 1: As specified in TS 38.213 [3] and TS 38.331 [2]. Note 2: For information				

A.3.1A Reference measurement channels under CCA

A.3.1A.1 PDSCH

A.3.1A.1.1 TDD

Table A.3.1A.1.1-1: PDSCH Reference Measurement Channels for SCS=30kHz

Parameter	Unit	Value						
Reference channel		SR.1.1 CCA						
Channel bandwidth	MHz	40						
Number of transmitter antennas		1						
Allocated resource blocks for PDSCH Note 1		24						
Allocated slots per Radio Frame								
Radio frame containing SSB	slots	Note 5						
Radio frame not containing SSB	slots	Note 7						
MCS table		64QAM						
MCS index		4						
Modulation		QPSK						
Target Coding Rate		1/3						
Number of control symbols		2						
PDSCH mapping type		Type A						
Information Bit Payload								
For slots with RMSI Note 2	bits	1608						
For slots without RMSI	bits	1864						

Number of Code Blocks per slot		1						
Binary Channel Bits Per slot								
For slots with RMSI Note 2, Note 4	bits	5184						
For slots without RMSI Note 6	bits	6048						

Note 1: Allocated outside the discovery burst transmission window in time and in resource blocks which do not overlap with the resource blocks allocated for SS/PBCH block.
Note 2: PDSCH is scheduled on the slots with RMSI.
Note 3: If necessary the information bit payload size can be adjusted to facilitate the test implementation. The payload sizes are defined in TS 38.213 [3].
Note 4: Derived based on the PDSCH DMRS assumption: dmrs-TypeA-Position=2, dmrs-Type=1, dmrs-AdditonalPositions=2, maxLength=1, Antenna port index: 1000, and Number of PDSCH DMRS CDM group(s) without data: 2.
Note 5: PDSCH is not scheduled in slots containing SSB according to the SSB configuration used in the test. SSB configurations are defined in clause A.3.10A.
Note 6: Derived based on the PDSCH DMRS assumption: dmrs-TypeA-Position=2, dmrs-Type=1, dmrs-AdditonalPositions=2, maxLength=1, Antenna port index: 1000, and Number of PDSCH DMRS CDM group(s) without data: 1.
Note 7: PDSCH is transmitted during the RMC burst as specified in A.3.1A.5.

A.3.1A.2 CORESET for RMSI scheduling

A.3.1A.2.1 TDD

Table A.3.1A.2.1-1: RMSI CORESET Reference Channel for SCS=30KHz

Parameter	Unit	Value						
Reference channel		CR.1.1 CCA						
Channel bandwidth	MHz	40						
Subcarrier spacing	kHz	30						
Allocated resource blocks for RMSI CORESET Note 7		48						
SSB and RMSI CORESET multiplexing configuration Note 7		Pattern 1						
Offset between SSB and RMSI CORESET Note 3, 7	RB	0 (Note 8)						
Configuration of PDCCH monitoring occasions for RMSI CORESET Note 4		Index 0						
Number of transmitter antennas		1						
Duration of RMSI CORESET Note 7	symbols	2						
DCI Format Note 1		Note 2						
Aggregation level	CCE	8						
DMRS precoder granularity		6						
REG bundle size		6						
Mapping from REG to CCE		Distributed						
Cell ID		Note 5						
Payload (without CRC)	bits	Note 6						

Note 1: DCI formats are defined in TS 38.212.
Note 2: DCI format shall depend upon the test configuration.
Note 3: The offset is defined with respect to the subcarrier spacing of the CORESET from the smallest RB index of RMSI CORESET to the smallest RB index of the common RB overlapping with the first RB of the SS/PBCH block.
Note 4: The configuration of PDCCH monitoring occasions for RMSI CORESET is defined in Table 13-11 in TS 38.213 [3].
Note 5: Cell ID shall depend upon the test configuration.
Note 6: Payload size shall depend upon the test configuration.
Note 7: The configuration of set of resource blocks and slot symbols of control resource set for Type0-PDCCH search space corresponds to index 4 in Table 13-4A in TS 38.213 [3].
Note 8: Other values can be used to align with GSCN [13] as long as SSB does not overlap the RMC.

A.3.1A.3 CORESET for RMC scheduling

A.3.1A.3.1 TDD

Table A.3.1A.3.1-1: Control Channel RMC with SCS=30KHz

Parameter	Unit	Value						
Reference channel		CCR.1.1 CCA	CCR.1.2 CCA	CCR.1.3 CCA				
Channel bandwidth	MHz	40	40	40				
Subcarrier spacing	kHz	30	30	30				
Allocated resource blocks for CORESET Note 3		24	24	18				
Number of transmitter antennas		1	1	1				
Duration of CORESET	symbols	2	2	2				
REG bundle size		6	6	6				
DMRS precoder granularity		Same as REG bundle size	Same as REG bundle size	Same as REG bundle size				
CCE to REG mapping		Interleaved	Interleaved	Interleaved				
Interleave n_shift		0	0	0				
Interleave size		2	2	2				
Beamforming Pre-Coder		N/A	N/A	N/A				
Aggregation level	CCE	4	8	4				
DCI formats		Note 1	Note 1	Note 1				
Payload size (without CRC)	bits	Note 2	Note 2	Note 2				

Note 1: DCI format shall depend upon the test configuration.
Note 2: Payload size shall depend upon the test configuration.
Note 3: Allocated in the same resource blocks where the associated RMC is scheduled.

A.3.1A.4 TDD UL/DL configuration

Table A.3.1A.4-1: TDD UL/DL configuration for SCS=30kHz

Parameter	Unit	Value		
Reference channel		TDDConf.1.1 CCA		
referenceSubcarrierSpacing	kHz	N/A		
TDD UL/DL pattern 1 Note 2, Note 3		'3D1S4U' S='6DL:4GP:4UL'		

dl-UL-TransmissionPeriodicity	ms	N/A		
nrofDownlinkSlots		N/A		
nrofDownlinkSymbols		N/A		
nrofUplinkSlot		N/A		
nrofUplinkSymbols		N/A		
TDD UL/DL pattern 2 Note 2, Note 3		'DD'		
dl-UL-TransmissionPeriodicity	ms	N/A		
nrofDownlinkSlots		N/A		
nrofDownlinkSymbols		N/A		
nrofUplinkSlot		N/A		
nrofUplinkSymbols		N/A		
Note 1: As specified in TS 38.213 [3] and TS 38.331 [2]. Note 2: Do not configure *tdd-UL-DL-ConfigurationCommon* using RRC configuration Note 3: The UE will be scheduled via DCI according to the TDD pattern defined in the table.				

A.3.1A.5 RMC burst transmission model

RMC not conveying RMSI is scheduled during the RMC burst. The length of the transmission burst in slots is defined as N. The burst transmission format is determined according to the steps below:

1. Select N randomly from a given set of the number of slots $S_1 = \{1,3,5\}$ with equal probability as the total length of RMC burst transmission format.

2. A uniform random variable from 0 to 1 is generated. If the random variable is less than P_{CCA_DL}, a burst of N fully occupied slots is transmitted. Otherwise, the RMC burst transmission is muted and the muting duration is the same as the number N of slots for determined burst format.

RMC burst transmission is scheduled outside discovery burst transmission window. If transmission occurred in the previous slot, transmission is muted for a duration of one slot. Additionally, if the start time of the candidate RMC burst transmission is within 5 slots of the start of the discovery burst transmission window, RMC transmission is not performed.A.3.2 OFDMA channel noise generator (OCNG).

A.3.2.1 Generic OFDMA Channel Noise Generator (OCNG)

The OCNG pattern is used in a test for modelling allocations of unused resources in the channel bandwidth to virtual UEs (which are not under test). The OCNG pattern comprises PDCCH and PDSCH transmissions to the virtual UEs.

A.3.2.1.1 OCNG pattern 1: Generic OCNG pattern for all unused REs

Table A.3.2.1.1-1: OP.1: Generic OCNG pattern for all unused REs

OCNG Parameters	Control Region	Data Region
Resource allocation	Unused REs (Note 1)	Unused REs (Note 2)
Channel	PDCCH	PDSCH
Contents	Virtual UE IDs	Uncorrelated pseudo random QPSK modulated data
Antenna transmission scheme	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Subcarrier spacing	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Aggregation level	Same as used in PDCCH RMC	N/A
Code rate	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Transmit Power	Same as used in PDCCH RMC	Same as used in PDSCH RMC
CP length	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Note 1: REs not used in the active CORESETs where PDCCH is scheduled for the UE under test.		

Note 2: REs not allocated to any physical channels, CORESET, SSB or any other reference signal within the channel bandwidth of the cell, confined to $BW_{occupied}$ where specified in the test case.

A.3.2.1.2 OCNG pattern 2: Generic OCNG pattern for all unused REs for 2AoA setup

Table A.3.2.1.2-2: OP.2: Generic OCNG pattern for all unused REs for 2AoA setup

OCNG Parameters	Control Region	Data Region
Probe	Transmitting the serving beam	
Resource allocation	Unused REs (Note 1) in the symbols where SSB/CSI-RS are not transmitted from both the serving beam probe and non-serving beam probe.	Unused REs (Note 2) in the symbols where SSB/CSI-RS are not transmitted from both the serving beam probe and non-serving beam probe.
Channel	PDCCH	PDSCH
Contents	Virtual UE IDs	Uncorrelated pseudo random QPSK modulated data
Antenna transmission scheme	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Subcarrier spacing	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Aggregation level	Same as used in PDCCH RMC	N/A
Code rate	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Transmit Power	Same as used in PDCCH RMC	Same as used in PDSCH RMC
CP length	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Note 1: REs not used in the active CORESETs where PDCCH is scheduled for the UE under test. Note 2: REs not allocated to any physical channels, CORESET, SSB or any other reference signal within the channel bandwidth of the cell, confined to $BW_{occupied}$ where specified in the test case. Note 3: No OCNG is transmitted from the probe transmitting non-serving beam.		

A.3.2.1.3 OCNG pattern 3: Generic OCNG pattern for unused REs in the same bandwidth as CORESET

Table A.3.2.1.3-1: OP.3: Generic OCNG pattern for unused REs in the same BW as CORESET

OCNG Parameters	Control Region	Data Region
Resource allocation	Unused REs (Note 1)	Unused REs (Note 2)
Channel	PDCCH	PDSCH
Contents	Virtual UE IDs	Uncorrelated pseudo random QPSK modulated data
Antenna transmission scheme	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Subcarrier spacing	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Aggregation level	Same as used in PDCCH RMC	N/A
Code rate	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Transmit Power	Same as used in PDCCH RMC	Same as used in PDSCH RMC
CP length	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Note 1: REs not used in the active CORESETs where PDCCH is scheduled for the UE under test. REs for OCNG shall not be allocated outside the allocated bandwidth of the CORESET of the serving cell. Note 2: REs not allocated to any physical channels, CORESET, SSB or any other reference signal within the allocated bandwidth of the CORESET of the serving cell. REs for OCNG shall not be allocated outside the allocated bandwidth of the CORESET of the serving cell.		

A.3.2.1.4 OCNG pattern 4: Generic OCNG pattern for all unused REs outside SSB slot(s)

Table A.3.2.1.4-1: OP.4: Generic OCNG pattern for all unused REs outside SSB slot(s)

OCNG Parameters	Control Region	Data Region
Resource allocation	Unused REs (Note 1)	Unused REs (Note 2)
Channel	PDCCH	PDSCH
Contents	Virtual UE IDs	Uncorrelated pseudo random QPSK modulated data
Antenna transmission scheme	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Subcarrier spacing	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Aggregation level	Same as used in PDCCH RMC	N/A
Code rate	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Transmit Power	Same as used in PDCCH RMC	Same as used in PDSCH RMC
CP length	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Note 1: REs not used in the active CORESETs where PDCCH is scheduled for the UE under test. REs for OCNG shall not be allocated in the slot(s) containing SSB of the respective cell. Note 2: REs not allocated to any physical channels, CORESET, SSB or any other reference signal within the channel bandwidth of the cell. REs for OCNG shall not be allocated in the slot(s) containing SSB of the respective cell.		

A.3.2.1.5 OCNG pattern 5: Generic OCNG pattern for unused REs in the same bandwidth as CORESET for 2AoA setup

Table A.3.2.1.5-1: OP.5: Generic OCNG pattern for unused REs in the same BW as CORESET for 2AoA setup

OCNG Parameters	Control Region	Data Region
Probe	Transmitting the serving beam	
Resource allocation	Unused REs (Note 1) in the symbols where SSB/CSI-RS are not transmitted from both the serving beam probe and non-serving beam probe.	Unused REs (Note 2) in the symbols where SSB/CSI-RS are not transmitted from both the serving beam probe and non-serving beam probe.
Channel	PDCCH	PDSCH
Contents	Virtual UE IDs	Uncorrelated pseudo random QPSK modulated data
Antenna transmission scheme	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Subcarrier spacing	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Aggregation level	Same as used in PDCCH RMC	N/A
Code rate	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Transmit Power	Same as used in PDCCH RMC	Same as used in PDSCH RMC
CP length	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Note 1: REs not used in the active CORESETs where PDCCH is scheduled for the UE under test. REs for OCNG shall not be allocated outside the allocated bandwidth of the CORESET of the serving cell. Note 2: REs not allocated to any physical channels, CORESET, SSB or any other reference signal within the allocated bandwidth of the CORESET of the serving cell. REs for OCNG shall not be allocated outside the allocated bandwidth of the CORESET of the serving cell. Note 3: No OCNG is transmitted from the probe transmitting non-serving beam.		

A.3.2.2 Void

A.3.3 Reference DRX configurations

A.3.3.1 DRX Configuration 1: DRX cycle = 40 ms and TAT = 500 ms

Table A.3.3.1-1: DRX.1: DRX cycle = 40 ms and time alignment timer (TAT) = 500 ms

Field	Value
drx-onDurationTimer	1 ms
drx-InactivityTimer	1 ms
drx-RetransmissionTimerDL	1 slot
drx-RetransmissionTimerUL	1 slot
drx-LongCycleStartOffset	40 ms
shortDRX	disable
TimeAlignmentTimer	500 ms
Note: This DRX configuration is applicable for NR serving cell. The DRX cycle and time alignment timer parameters are specified in clause 6.3.2 in TS 38.331 [2]	

A.3.3.2 DRX Configuration 2: DRX cycle = 640 ms and TAT = 500 ms

Table A.3.3.2-1: DRX.2: DRX cycle = 640 ms and time alignment timer (TAT) = 500 ms

Field	Value
drx-onDurationTimer	1 ms
drx-InactivityTimer	1 ms
drx-RetransmissionTimerDL	1 slot
drx-RetransmissionTimerUL	1 slot
drx-LongCycleStartOffset	640 ms
shortDRX	disable
TimeAlignmentTimer	500 ms
Note: This DRX configuration is applicable for NR serving cell. The DRX cycle and time alignment timer parameters are specified in clause 6.3.2 in TS 38.331 [2]	

A.3.3.3 DRX Configuration 3: DRX cycle = 40 ms and TAT = Infinity

Table A.3.3.3-1: DRX.3: DRX cycle = 40 ms and time alignment timer (TAT) = Infinity

Field	Value
drx-onDurationTimer	6 ms
drx-InactivityTimer	1 ms
drx-RetransmissionTimerDL	1 slot
drx-RetransmissionTimerUL	1 slot
drx-LongCycleStartOffset	40 ms
shortDRX	disable
TimeAlignmentTimer	Infinity
Note: This DRX configuration is applicable for NR serving cell. The DRX cycle and time alignment timer parameters are specified in clause 6.3.2 in TS 38.331 [2]	

A.3.3.4 DRX Configuration 4: DRX cycle = 160 ms and TAT = Infinity

Table A.3.3.4-1: DRX.4: DRX cycle = 160 ms and time alignment timer (TAT) = Infinity

Field	Value
drx-onDurationTimer	psf2
drx-InactivityTimer	psf2
drx-RetransmissionTimer	Psf16
longDRX-CycleStartOffset	sf160, 0
shortDRX	disable
TimeAlignmentTimer	Infinity
Note: This DRX configuration is applicable for E-UTRA serving cell. For further information see clause 6.3.2 in TS 36.331 [16].	

A.3.3.5 DRX Configuration 5: DRX cycle = 320 ms and TAT = Infinity

Table A.3.3.5-1: DRX.5: DRX cycle = 320 ms and time alignment timer (TAT) = Infinity

Field	Value
drx-onDurationTimer	psf6
drx-InactivityTimer	psf1920
drx-RetransmissionTimer	psf16
longDRX-CycleStartOffset	sf320, 0
shortDRX	disable
TimeAlignmentTimer	Infinity
Note: This DRX configuration is applicable for E-UTRA serving cell. For further information see clause 6.3.2 in TS 36.331 [16].	

A.3.3.6 DRX Configuration 6: DRX cycle = 320 ms and TAT = 500 ms

Table A.3.3.6-1: DRX.6: DRX cycle = 320 ms and time alignment timer (TAT) = 500 ms

Field	Value
drx-onDurationTimer	1 ms
drx-InactivityTimer	1 ms
drx-RetransmissionTimerDL	1 slot
drx-RetransmissionTimerUL	1 slot
drx-LongCycleStartOffset	320 ms
shortDRX	disable
TimeAlignmentTimer	500 ms
Note: This DRX configuration is applicable for NR serving cell. The DRX cycle and time alignment timer parameters are specified in clause 6.3.2 in TS 38.331 [2]	

A.3.3.7 DRX Configuration 7: DRX cycle = 640 ms and TAT = Infinity

Table A.3.3.7-1: DRX.7: DRX cycle = 640 ms and time alignment timer (TAT) = Infinity

Field	Value
drx-onDurationTimer	6 ms
drx-InactivityTimer	1 ms
drx-RetransmissionTimerDL	1 slot

drx-RetransmissionTimerUL	1 slot
drx-LongCycleStartOffset	640 ms
shortDRX	disable
TimeAlignmentTimer	Infinity
Note: This DRX configuration is applicable for NR serving cell. The DRX cycle and time alignment timer parameters are specified in clause 6.3.2 in TS 38.331 [2]	

A.3.3.8 DRX Configuration 8: DRX cycle = 320 ms and TAT = Infinity

Table A.3.3.8-1: DRX.8: DRX cycle = 320 ms and time alignment timer (TAT) = Infinity

Field	Value
drx-onDurationTimer	6 ms
drx-InactivityTimer	1 ms
drx-RetransmissionTimerDL	1 slot
drx-RetransmissionTimerUL	1 slot
drx-LongCycleStartOffset	320 ms
shortDRX	disable
TimeAlignmentTimer	Infinity
Note: This DRX configuration is applicable for NR serving cell. The DRX cycle and time alignment timer parameters are specified in clause 6.3.2 in TS 38.331 [2]	

A.3.3.9 DRX Configuration 9: DRX cycle = 40 ms and TAT = 500 ms

Table A.3.3.9-1: DRX.9: DRX cycle = 40 ms and time alignment timer (TAT) = 500 ms

Field	Value
drx-onDurationTimer	psf2
drx-InactivityTimer	psf2
drx-RetransmissionTimer	psf16
longDRX-CycleStartOffset	sf40, 0
shortDRX	disable
TimeAlignmentTimer	500 ms
Note: This DRX configuration is applicable for E-UTRA serving cell. For further information see clause 6.3.2 in TS 36.331 [16].	

A.3.3.10 DRX Configuration 10: DRX cycle = 640 ms and TAT = 500 ms

Table A.3.3.10-1: DRX.10: DRX cycle = 640 ms and time alignment timer (TAT) = 500 ms

Field	Value
drx-onDurationTimer	psf6
drx-InactivityTimer	psf2
drx-RetransmissionTimer	psf16
longDRX-CycleStartOffset	sf640, 0
shortDRX	disable
TimeAlignmentTimer	500 ms
Note: This DRX configuration is applicable for E-UTRA serving cell. For further information see clause 6.3.2 in TS 36.331 [16].	

A.3.3.11 DRX Configuration 11: DRX cycle = 20 ms and TAT = Infinity

Table A.3.3.11-1: DRX.11: DRX cycle = 20 ms and time alignment timer (TAT) = Infinity

Field	Value
drx-onDurationTimer	6 ms
drx-InactivityTimer	1 ms
drx-RetransmissionTimerDL	1 slot
drx-RetransmissionTimerUL	1 slot
drx-LongCycleStartOffset	20 ms
shortDRX	disable
TimeAlignmentTimer	Infinity
Note: This DRX configuration is applicable for NR serving cell. The DRX cycle and time alignment timer parameters are specified in clause 6.3.2 in TS 38.331 [2]	

A.3.3.12 DRX Configuration 12: DRX cycle = 640 ms and TAT = Infinity

Table A.3.3.12-1: DRX.12: DRX cycle = 640 ms and time alignment timer (TAT) = Infinity

Field	Value
drx-onDurationTimer	psf6
drx-InactivityTimer	psf2
drx-RetransmissionTimer	psf16
longDRX-CycleStartOffset	sf640, 0
shortDRX	disable
TimeAlignmentTimer	Infinity
Note: This DRX configuration is applicable for E-UTRA serving cell. For further information see clause 6.3.2 in TS 36.331 [16].	

A.3.3.13 DRX Configuration X1: DRX cycle = 80 ms and TAT = Infinity

Table A.3.3.13-1: DRX.X1: DRX cycle = 80 ms and time alignment timer (TAT) = Infinity

Field	Value
drx-onDurationTimer	6 ms
drx-InactivityTimer	1 ms
drx-RetransmissionTimerDL	1 slot
drx-RetransmissionTimerUL	1 slot
drx-LongCycleStartOffset	80 ms
shortDRX	disable
TimeAlignmentTimer	Infinity
Note: This DRX configuration is applicable for NR serving cell. The DRX cycle and time alignment timer parameters are specified in clause 6.3.2 in TS 38.331 [2]	

A.3.4 Test Cases with Different Channel Bandwidths

A.3.4.1 Test Cases with Different E-UTRA Channel Bandwidths

A.3.4.1.1 Introduction

In Annex A test cases involving E-UTRA cell(s) may be defined with different E-UTRA channel bandwidths to verify the same type of RRM requirement.

A.3.4.1.2 Principle of testing

If multiple test cases involving E-UTRA cell(s) are defined with different E-UTRA channel bandwidths to verify the same type of RRM requirement that is E-UTRA channel bandwidth independent, then the UE needs to be tested with only one channel bandwidth in each E-UTRA cell and with the same bandwidth in all the E-UTRA cells used in the test case.

A.3.5 Test Cases for Synchronous and Asynchronous DC Operations

A.3.5.1 EN-DC Test Cases for Synchronous and Asynchronous EN-DC Operations

A.3.5.1.1 Introduction

This clause defines a principle which is applicable to test cases verifying RRM requirements for EN-DC operation in synchronous and asynchronous scenarios.

In Annex A test cases may be defined in both synchronous EN-DC and asynchronous EN-DC scenarios to verify the same type of RRM requirement.

A.3.5.1.2 Principle of Testing

If EN-DC test cases are defined in both synchronous and asynchronous EN-DC scenarios to verify the same type of RRM requirement then the UE capable of both synchronous and asynchronous EN-DC operations needs to be tested with one of the tests in either synchronous or asynchronous EN-DC scenarios.

A.3.6 Antenna configurations

A.3.6.1 Antenna configurations for FR1

Unless otherwise specified, NR FDD or NR TDD cells in all RRM Test cases in AWGN propagation condition are configured with Antenna Configuration 1x2.

A.3.6.1.1 Antenna connection for 4 Rx capable UEs

A.3.6.1.1.1 Introduction

All tests in clause A.4 and A.6 are specified for UEs supporting 2RX. In this clause, the antenna connection method for applying 2RX tests to UEs supporting 4RX antenna ports is specified. No tests are currently specified in clause A.4 or A.6 which are applicable only to 4RX antenna ports, so 4RX capable UEs are always tested by reusing tests which were originally specified for 2RX UEs.

A.3.6.1.1.2 Principle of testing

A.3.6.1.1.2.1 Single carrier tests

For 4RX capable UEs supporting at least one band where 2RX is supported and 4RX is not supported, the, all single carrier tests specified in clause A.4 and A.6 except those in A.4.7 and A.6.7 shall be tested on any band where 2RX is supported and 4RX is not supported with the antenna connection specified in A.3.6.1.1.2.4. For single carrier tests specified in clause A.4.7 or A.6.7, all tests shall be tested with the antenna connection specified in A.3.6.1.1.2.4 for bands where 2RX is supported and 4RX is not supported, and the antenna connection specified in A.3.6.1.1.2.5 for bands where 4RX is supported.

For 4RX capable UEs which do not support any band where 2RX is supported and 4RX is not supported, all tests specified in clauses A.4 and A.6 shall be tested using the antenna connection specified in clause A.3.6.1.1.2.5. For radio link monitoring tests, the SNR levels are modified according to table A.3.6.1.1.2.1-1 and table A.3.6.1.1.2.1-2

Table A.3.6.1.1.2.1-1: Modified parameters for RLM out of sync testing with 4 RX antenna connection

Test case	SNR during T3 (dB)			
	Test 1	Test 2	Test 3	Test 4
A.4.5.1.1	-18	N/A	N/A	N/A
A.4.5.1.3	-18	N/A	N/A	N/A
A.4.5.1.5	-18	N/A	N/A	N/A
A.4.5.1.7	-18	N/A	N/A	N/A
A.5.5.1.1	-18	N/A	N/A	N/A
A.5.5.1.3	-18	N/A	N/A	N/A
A.5.5.1.5	-18	N/A	N/A	N/A
A.5.5.1.7	-18	N/A	N/A	N/A
A.6.5.1.1	-18	N/A	N/A	N/A
A.6.5.1.3	-18	N/A	N/A	N/A
A.6.5.1.5	-18	N/A	N/A	N/A
A.6.5.1.7	-18	N/A	N/A	N/A
A.7.5.1.1	-18	N/A	N/A	N/A
A.7.5.1.3	-18	N/A	N/A	N/A
A.7.5.1.5	-18	N/A	N/A	N/A
A.7.5.1.7	-18	N/A	N/A	N/A

Table A.3.6.1.1.2.1-2: Modified parameters for RLM in sync single carrier testing with 4 RX antenna connection

Test case	SNR during T3 (dB)		SNR during T4 (dB)	
	Test 1	Test 2	Test 1	Test 2
A.4.5.1.2	-18	N/A	-8	N/A
A.4.5.1.4	-18	N/A	-8	N/A
A.4.5.1.6	-18	N/A	-8	N/A
A.4.5.1.8	-18	N/A	-8	N/A
A.5.5.1.2	-18	N/A	-8	N/A
A.5.5.1.4	-18	N/A	-8	N/A
A.5.5.1.6	-18	N/A	-8	N/A
A.5.5.1.8	-18	N/A	-8	N/A
A.6.5.1.2	-18	N/A	-8	N/A
A.6.5.1.4	-18	N/A	-8	N/A
A.6.5.1.6	-18	N/A	-8	N/A
A.6.5.1.8	-18	N/A	-8	N/A
A.7.5.1.2	-18	N/A	-8	N/A
A.7.5.1.4	-18	N/A	-8	N/A
A.7.5.1.6	-18	N/A	-8	N/A
A.7.5.1.8	-18	N/A	-8	N/A

Table A.3.6.1.1.2.1-3: Modified parameters for Beam Failure Detection and Link Recovery testing with 4 RX antenna connection

Test case	SNR for RS in set q_0 during T3, T4 and T5 (dB)
	Test 1
A.4.5.5.1	-15
A.4.5.5.2	-15
A.4.5.5.3	-15
A.4.5.5.4	-15
A.4.5.5.5	-15
A.4.5.5.6	-15
A.5.5.5.1	-15
A.5.5.5.2	-15
A.5.5.5.3	-15
A.5.5.5.4	-15
A.5.5.5.5	-15
A.5.5.5.6	-15
A.5.5.5.7	-15
A.6.5.5.1	-15
A.6.5.5.2	-15
A.6.5.5.3	-15
A.6.5.5.4	-15
A.6.5.5.5	-15
A.6.5.5.6	-15
A.7.5.5.1	-15
A.7.5.5.2	-15
A.7.5.5.3	-15
A.7.5.5.4	-15
A.7.5.5.5	-15
A.7.5.5.6	-15
A.7.5.5.7	-15

A.3.6.1.1.2.2 Carrier aggregation tests

All carrier aggregation tests are performed using the antenna connection in clause A.3.6.1.1.2.4 for the PCell antenna connection if the PCell is on a band where 2RX is supported and 4RX is not supported, or using the antenna connection in A.3.6.1.1.2.5 for the PCell antenna connection if the PCell is on a band where 4RX is supported.

All carrier aggregation tests are performed using the antenna connection in clause A.3.6.1.1.2.4 for the SCell antenna connection if an SCell is on band where 2RX is supported and 4RX is not supported, or using the antenna connection in A.3.6.1.1.2.5 for the SCell antenna connection if an SCell is on a band where 4RX is supported.

A.3.6.1.1.2.3 EN-DC tests

All EN-DC tests are performed using the antenna connection in clause A.3.6.1.1.2.6 for the PCell antenna connection if the PCell is on a band where 2RX is supported and 4RX is not supported, or using the antenna connection in A.3.6.1.1.2.7 for the PCell antenna connection if the PCell is on a band where 4RX is supported.

All EN-DC tests are performed using the antenna connection in clause A.3.6.1.1.2.4 for the PSCell or SCell antenna connection if an SCell is on band where 2RX is supported and 4RX is not supported, or using antenna connection in A.3.6.1.1.2.5 for the SCell antenna connection if an SCell or PSCell is on a band where 4RX is supported.

A.3.6.1.1.2.4 Antenna connection for bands where 2RX is supported

For bands where 2RX is supported and 4RX is not supported, it is left to the UE declaration and antenna port configuration to decide which 2 of the 4 Rx ports are connected with data source from system simulator. The remaining 2 RX ports shall be connected with zero input**.** No test parameters or requirements are modified.

A.3.6.1.1.2.5 Antenna connection for bands where 4RX is supported

For bands where 4RX is supported, all 4 RX antennas are connected with data source from system simulator**.** The system simulator shall provide independent noise and fading (low correlation) for each antenna port. Except for the modifications to radio link monitoring thresholds described in clauses A.3.6.1.1.2.1 and A.3.6.1.1.2.2, no test parameters or requirements are modified.

A.3.6.1.1.2.6 EN-DC LTE Antenna connection for bands where 2RX is supported

For E-UTRAN bands where 2RX is supported and 4RX is not supported, it is left to the UE declaration and antenna port configuration to decide which 2 of the 4 Rx ports are connected with data source from system simulator. The remaining 2 RX ports shall be connected with zero input**.** No test parameters or requirements are modified.

A.3.6.1.1.2.7 EN-DC LTE Antenna connection for bands where 4RX is supported

For bands E-UTRAN where 4RX is supported, all 4 RX antennas are connected with data source from system simulator**.** The system simulator shall provide independent noise and fading (low correlation) for each antenna port. Except for the modifications to radio link monitoring thresholds described in clauses A.3.8.1.2.1 and A.3.8.1.2.2 of TS 36.133 [15], no test parameters or requirements are modified.

A.3.6.2 Antenna configurations for FR2

Unless otherwise specified, the default Downlink Antenna Configuration for NR FR2 cells is 1x2.

In case of Downlink Antenna Configuration 2x2 for NR FR2 cells, unless otherwise specified, the downlink signal is transmitted over the two polarizations (V and H) of the dual polarized antenna of the test equipment.

In both cases, the downlink signal is received assuming 2 UE baseband receivers. As the UE is tested following the Blackbox Approach with regard to the UE Rx antennas, the exact UE Rx antenna configuration is not relevant for the test configuration and has no impact on the test implementation.

A.3.6A Antenna configurations with unlicensed bands

A.3.6A.1 Antenna configurations for FR1

Unless otherwise specified, NR unlicensed cells in all RRM Test cases in AWGN propagation condition are configured with Antenna Configuration 1x2.

A.3.6A.1.1 Antenna connection for 4 Rx capable UEs

A.3.6A.1.1.1 Introduction

All tests in clause A.13, A.10, A.11, and A.12 are specified for UEs supporting 2RX. In this clause, the antenna connection method for applying 2RX tests to UEs supporting 4RX antenna ports is specified. No tests are currently specified in clause A.13, A.10, A.11 or A.12 which are applicable only to 4RX antenna ports, so 4RX capable UEs are always tested by reusing tests which were originally specified for 2RX UEs.

A.3.6A.1.1.2 Principle of testing

A.3.6A.1.1.2.1 Single carrier tests

For 4RX capable UEs supporting at least one 2RX band, the, all single carrier tests specified in clause A.13. A.10, A.11 and A.12 except those in A.13.4, A.10.5, A.11.6 and A.12.5 shall be tested on any band where 2RX is supported with the antenna connection specified in A.3.6A.1.1.2.4. For single carrier tests specified in clause A.13.4, A.10.5, A.11.6 or A.12.5, all tests shall be tested with the antenna connection specified in A.3.6A.1.1.2.4 for bands where 2RX is supported, and the antenna connection specified in A.3.6A.1.1.2.5 for bands where 4RX is supported.

For 4RX capable UEs which do not support any 2RX band, all tests specified in clauses A.13, A.10, A.11 and A.12 shall be tested using the antenna connection specified in clause A.3.6A.1.1.2.5. For radio link monitoring tests, the SNR levels are modified according to table A.3.6A.1.1.2.1-1 and table A.3.6A.1.1.2.1-2

Table A.3.6A.1.1.2.1-1: Modified parameters for RLM out of sync testing with 4 RX antenna connection

Test case	SNR during T3 (dB)			
	Test 1	Test 2	Test 3	Test 4
A.10.3.1.2	-18	N/A	N/A	N/A
A.10.3.1.4	TBD	N/A	N/A	N/A
A.11.4.1.2	-18	N/A	N/A	N/A
A.11.4.1.4	TBD	N/A	N/A	N/A

Table A.3.6A.1.1.2.1-2: Modified parameters for RLM in sync single carrier testing with 4 RX antenna connection

Test case	SNR during T3 (dB)		SNR during T4 (dB)	
	Test 1	Test 2	Test 1	Test 2
A.10.3.1.3	-18	N/A	-8	N/A
A.10.3.1.5	TBD	N/A	TBD	N/A
A.11.4.1.3	-18	N/A	-8	N/A
A.11.4.1.5	TBD	N/A	TBD	N/A

Table A.3.6A.1.1.2.1-3: Modified parameters for Beam Failure Detection and Link Recovery testing with 4 RX antenna connection

Test case	SNR for RS in set q_0 during T3, T4 and T5 (dB)	
	Test 1	Test 2
A.10.3.4.1	-15	N/A
A.10.3.4.2	-15	N/A
A.11.4.4.1	-15	N/A
A.11.4.4.2	-15	N/A

A.3.6A.1.1.2.2 Carrier aggregation tests

All carrier aggregation tests are performed using the antenna connection in clause A.3.6A.1.1.2.4 for the PCell antenna connection if the PCell is on a band where 2RX is supported or the antenna connection in A.3.6A.1.1.2.5 for the PCell antenna connection if the PCell is on a band where 4RX is supported.

All carrier aggregation tests are performed using the antenna connection in clause A.3.6A.1.1.2.4 for the SCell antenna connection if an SCell is on band where 2RX is supported or the testing procedure in A.3.6A.1.1.2.5 for the SCell antenna connection if an SCell is on a band where 4RX is supported.

A.3.6A.1.1.2.3 EN-DC tests

All carrier aggregation tests are performed using the antenna connection in clause A.3.6A.1.1.2.6 for the PCell antenna connection if the PCell is on a band where 2RX is supported or the antenna connection in A.3.6A.1.1.2.7 for the PCell antenna connection if the PCell is on a band where 4RX is supported.

All carrier aggregation tests are performed using the antenna connection in clause A.3.6A.1.1.2.4 for the PSCell or SCell antenna connection if an SCell is on band where 2RX is supported or the testing procedure in A.3.6A.1.1.2.5 for the SCell antenna connection if an SCell or PSCell is on a band where 4RX is supported.

A.3.6A.1.1.2.4 Antenna connection for bands where 2RX is supported

For bands where 2RX is supported, it is left to the UE declaration and AP configuration to decide which 2 of the 4 Rx ports are connected with data source from system simulator. The remaining 2 Rx ports shall be connected with zero input**.** No test parameters or requirements are modified.

A.3.6A.1.1.2.5 Antenna connection for bands where 4RX is supported

For bands where 4RX is supported, all 4 RX antennas are connected with data source from system simulator**.** The system simulator shall provide independent noise and fading (low correlation) for each antenna port. Except for the modifications to radio link monitoring thresholds described in clauses A.3.6A.1.1.2.1 and A.3.6A.1.1.2.2, no test parameters or requirements are modified.

A.3.6A.1.1.2.6 EN-DC LTE Antenna connection for bands where 2RX is supported

For bands where LTE 2RX is supported, it is left to the UE declaration and AP configuration to decide which 2 of the 4 Rx ports are connected with data source from system simulator. The remaining 2 Rx ports shall be connected with zero input**.** No test parameters or requirements are modified.

A.3.6A.1.1.2.7 EN-DC LTE Antenna connection for bands where 4RX is supported

For bands where LTE 4RX is supported, all 4 RX antennas are connected with data source from system simulator**.** The system simulator shall provide independent noise and fading (low correlation) for each antenna port. Except for the modifications to radio link monitoring thresholds described in clauses A.3.8.1.2.1 and A.3.8.1.2.2 of TS 36.133 [15], no test parameters or requirements are modified.

A.3.7 EN-DC test setup

A.3.7.1 Introduction

A.3.7.2 E-UTRAN Serving Cell Parameters

A.3.7.2.1 E-UTRAN Serving Cell Parameters for Tests with NR Cell(s) in FR1

Table A.3.7.2.1-1 defines cell specific test parameters for E-UTRAN cell which can be used in EN-DC test cases or in any test case comprising at least one E-UTRA serving cell with all NR cells in FR1. Unless otherwise stated within the test, all measurements in Annex A.4 and A.5 are performed only on the NR carrier. The E-UTRA serving cell shall configured to not interfere with NR operation and the E-UTRA serving cell signal power shall not be critical to the test purpose.

Table A.3.7.2.1-1: E-UTRAN cell specific test parameters for tests with all NR cells in FR1

Parameter	Unit	E-UTRAN Cell
Duplex mode		FDD or TDD
TDD special subframe configuration[Note1]		6
TDD uplink-downlink configuration[Note1]		1
$BW_{channel}$		5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100
PDSCH parameters: DL Reference Measurement Channel[Note2]		5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD 5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD

PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD 5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD
OCNG Patterns[Note2]		5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD 5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD
PBCH_RA	dB	0
PBCH_RB	dB	
PSS_RA	dB	
SSS_RA	dB	
PCFICH_RB	dB	
PHICH_RA	dB	
PHICH_RB	dB	
PDCCH_RA	dB	
PDCCH_RB	dB	
PDSCH_RA	dB	
PDSCH_RB	dB	
OCNG_RA[Note3]	dB	
OCNG_RB[Note3]	dB	
N_{oc}[Note4]	dBm/15 kHz	-104
$\hat{E}_s/N_{oc}$	dB	17
$\hat{E}_s/I_{ot}$	dB	17
RSRP [Note5]	dBm/15 kHz	-87
SCH_RP [Note5]	dBm/15 kHz	-87
Io [Note5]	dBm/Ch BW	-59.13+10log($N_{RB,c}$ /50)
Propagation Condition		AWGN
Antenna Configuration		1x2

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211.
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: E_s/I_{ot}, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.3.7.2.2 E-UTRAN Serving Cell Parameters for Tests with NR Cell(s) in FR2

Table A.3.7.2.2-1 defines cell specific test parameters for E-UTRAN cell which can be used in EN-DC test cases or in any test case comprising at least one E-UTRA serving cell with one or more NR cells in FR2.

Table A.3.7.2.2-1: E-UTRAN cell specific test parameters for tests with one or more NR cells in FR2

Parameter	Unit	E-UTRAN Cell
Duplex mode		FDD or TDD
TDD special subframe configuration[Note1]		6
TDD uplink-downlink configuration[Note1]		1
$BW_{channel}$	MHz	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100

PDSCH parameters: DL Reference Measurement Channel[Note2]		5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD 5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD 5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD
OCNG Patterns[Note2]		5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD 5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD
PBCH_RA	dB	0
PBCH_RB	dB	
PSS_RA	dB	
SSS_RA	dB	
PCFICH_RB	dB	
PHICH_RA	dB	
PHICH_RB	dB	
PDCCH_RA	dB	
PDCCH_RB	dB	
PDSCH_RA	dB	
PDSCH_RB	dB	
OCNG_RA[Note3]	dB	
OCNG_RB[Note3]	dB	
Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211. Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 respectively. Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 4: The E-UTRA signal is required only to ensure the E-UTRA link to the DUT in the EN-DC operation. The Test System shall provide a stable and noise-free E-UTRA signal without need of precise propagation modelling, path loss and polarization control. Further details of the E-UTRA signal configuration are not defined as part of the cell specific test parameters, since the E-UTRA link is not under performance verification and shall not affect the test result unless otherwise specifically stated in the test case.		

A.3.7A NR FR1-FR2 test setup

Some Test cases in clause A.7 have NR cells in both FR1 and FR2. Unless otherwise stated within the test, the NR FR1 Cell signal is required only to provide a link to the UE under test. The Test System shall provide a stable and noise-free NR FR1 signal without need of precise propagation modelling, path loss and polarization control. Further details of the NR FR1 signal configuration are not defined as part of the cell specific test parameters, since the NR FR1 link is not under performance verification and shall not affect the test result unless otherwise specifically stated in the test case.

A.3.7B EN-DC test setup with unlicensed bands

A.3.7B.1 Introduction

A.3.7B.2 E-UTRAN Serving Cell Parameters

A.3.7B.2.1 E-UTRAN Serving Cell Parameters for Tests with NR Cell(s) under CCA in FR1

Table A.3.7A.2.1-1 defines cell specific test parameters for E-UTRAN cell which can be used in EN-DC test cases or in any test case comprising at least one E-UTRA serving cell with all NR cells under CCA in FR1. Unless otherwise stated within the test, all measurements in Annex A.4 and A.5 are performed only on the unlicensed NR carrier. The E-UTRA serving cell shall configured to not interfere with NR operation and the E-UTRA serving cell signal power shall not be critical to the test purpose.

Table A.3.7B.2.1-1: E-UTRAN cell specific test parameters for tests with all NR cells user CCA in FR1

Parameter	Unit	E-UTRAN Cell
Duplex mode		FDD or TDD
TDD special subframe configuration[Note1]		6
TDD uplink-downlink configuration[Note1]		1
$BW_{channel}$		5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100
PDSCH parameters: DL Reference Measurement Channel[Note2]		5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD 5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD 5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD
OCNG Patterns[Note2]		5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD 5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD
PBCH_RA	dB	
PBCH_RB	dB	
PSS_RA	dB	
SSS_RA	dB	
PCFICH_RB	dB	
PHICH_RA	dB	
PHICH_RB	dB	0
PDCCH_RA	dB	

PDCCH_RB	dB	
PDSCH_RA	dB	
PDSCH_RB	dB	
OCNG_RA Note3	dB	
OCNG_RB Note3	dB	
N_{oc} Note4	dBm/15 kHz	-104
$\hat{E}_s/N_{oc}$	dB	17
$\hat{E}_s/I_{ot}$	dB	17
RSRP Note5	dBm/15 kHz	-87
SCH_RP Note5	dBm/15 kHz	-87
Io Note5	dBm/Ch BW	-59.13+10log($N_{RB,c}$ /50)
Propagation Condition		AWGN
Antenna Configuration		1x2

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211.
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: E_s/I_{ot}, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.3.7C LTE-FR1/FR2 test setup

Some Test cases in clause A.5 have LTE and FR2 NR cells. Unless otherwise stated within the test, the LTE Cell signal is required only to provide a link to the UE under test. The Test System shall provide a stable and noise-free LTE signal without need of precise propagation modelling, path loss and polarization control. Further details of the LTE signal configuration are not defined as part of the cell specific test parameters, since the LTE link is not under performance verification and shall not affect the test result unless otherwise specifically stated in the test case.

A.3.7D NE-DC test setup

A.3.7D.1 Introduction

A.3.7D.2 E-UTRAN Serving Cell Parameters

A.3.7D.2.1 E-UTRAN Serving Cell Parameters for Tests with NR Cell(s) in FR1

The parameters are same as as specified in clause A.3.7.2.1.

A.3.7D.2.2 E-UTRAN Serving Cell Parameters for Tests with NR Cell(s) in FR2

The parameters are same as as specified in clause A.3.7.2.2.

A.3.8 PRACH configurations

A.3.8.1 Introduction

This clause provides the typical PRACH configurations used for RRM test cases defined in Annex A. To note that for other parameters not listed in this clause, either it can be derived from the set up of each test or it is subjected to RAN5 specifications.

A.3.8.2 PRACH configurations in FR1

A.3.8.2.1 FR1 PRACH configuration 1

FR1 PRACH configuration 1 in this clause provides the typical PRACH configuration for SSB-based contention based random access in FR1.

Table A.3.8.2.1-1: Parameters for FR1 PRACH configuration 1

Field	Value	Comment
prach-ConfigurationIndex	102	10ms PRACH periodicity, and other detailed configuration defined in table 6.3.3.2-2 and table 6.3.3.2-3 in TS 38.211 [6].
msg1-SubcarrierSpacing	Same as UL carrier SCS	
totalNumberOfRA-Preambles	48	Total number of preambles used for contention based and contention free random access
numberOfRA-PreamblesGroupA	48	No group B.
prach-RootSequenceIndex	0	Logic sequence index = 0, resulting in root sequence = 1.
ssb-perRACH-OccasionAndCB-PreamblesPerSSB	oneFourth, n48	OneFourth: 1 SSB associated with 4 RACH occasions n48: 48 contention based preambles per SSB
msg1-FDM	One	One PRACH transmission occasions FDMed in one time instance.
rsrp-ThresholdSSB	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [2].
ra-ContentionResolutionTimer	sf48	48 sub-frames
powerRampingStep	dB2	
preambleReceivedTargetPower	dBm-120	
preambleTransMax	n6	Max number of RA preamble transmission performed before declaring a failure is 6
ra-ResponseWindow	sl10	10 slots
zeroCorrelationZoneConfig	11	N-CS configuration, N_{CS} = 23
Backoff Parameter Index	2	20ms, as defined in table 7.2-1 in TS 38.321 [7].
Note: For further information see clause 6.3.2 in TS 38.331 [2].		

A.3.8.2.2 FR1 PRACH configuration 2

FR1 PRACH configuration 2 in this clause provides the typical PRACH configuration for SSB based non-contention based random access in FR1.

Table A.3.8.2.2-1: Parameters for FR1 PRACH configuration 2

Field	Value	Comment
prach-ConfigurationIndex	102	10ms PRACH periodicity, and other detailed configuration defined in table 6.3.3.2-2 and table 6.3.3.2-3 in TS 38.211 [6].
msg1-SubcarrierSpacing	Same as UL carrier SCS	

totalNumberOfRA-Preambles	48	Total number of preambles used for contention based and contention free random access
numberOfRA-PreamblesGroupA	48	No group B.
prach-RootSequenceIndex	0	Logic sequence index = 0, resulting in root sequence = 1.
ssb-perRACH-Occasion	oneFourth	OneFourth: 1 SSB associated with 4 RACH occasions
msg1-FDM	One	One PRACH transmission occasions FDMed in one time instance.
powerRampingStep	dB2	
preambleReceivedTargetPower	dBm-120	
preambleTransMax	n6	Max number of RA preamble transmission performed before declaring a failure is 6
ra-ResponseWindow	sl10	10 slots
zeroCorrelationZoneConfig	11	N-CS configuration, N_{CS} = 23
Backoff Parameter Index	2	20ms, as defined in table 7.2-1 in TS 38.321 [7].
ssb-ResourceList	ra-PreambleIndex = 50	Associated with SSB index 0. UE doesn't use ssb-ResourceList and BFR-SSB-Resource IEs at the same time. UE doesn't use this field if is transmitting CFRA to convey BFR.
BFR-SSB-Resource	ra-PreambleIndex = 50	Associated with SSB index 0. UE doesn't use ssb-ResourceList and BFR-SSB-Resource IEs at the same time. UE uses this field only if is transmitting CFRA to convey BFR
ra-ssb-OccasionMaskIndex	1	PRACH occasion index 1 is allowed
rsrp-ThresholdSSB	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [2].
Note: For further information see clause 6.3.2 in TS 38.331 [2].		

A.3.8.2.3 FR1 PRACH configuration 3

FR1 PRACH configuration 3 in this clause provides the typical PRACH configuration for CSI-RS based non-contention based random access in FR1.

Table A.3.8.2.3-1: Parameters for FR1 PRACH configuration 3

Field	Value	Comment
prach-ConfigurationIndex	102	10ms PRACH periodicity, and other detailed configuration defined in table 6.3.3.2-2 and table 6.3.3.2-3 in TS 38.211 [6].
msg1-SubcarrierSpacing	Same as UL carrier SCS	
totalNumberOfRA-Preambles	48	Total number of preambles used for contention based and contention free random access
numberOfRA-PreamblesGroupA	48	No group B.
prach-RootSequenceIndex	0	Logic sequence index = 0, resulting in root sequence = 1.
ssb-perRACH-Occasion	oneFourth	OneFourth: 1 SSB associated with 4 RACH occasions
msg1-FDM	One	One PRACH transmission occasions FDMed in one time instance.
powerRampingStep	dB2	
preambleReceivedTargetPower	dBm-120	
preambleTransMax	n6	Max number of RA preamble transmission performed before declaring a failure is 6

ra-ResponseWindow	sl10	10 slots
zeroCorrelationZoneConfig	11	N-CS configuration, N_{CS} = 23
Backoff Parameter Index	2	20ms, as defined in table 7.2-1 in TS 38.321 [7].
csirs-ResourceList	ra-PreambleIndex = 50	Associated with CSI-RS configured
ra-OccasionList	1	RA occasions allowed corresponding to CSI-RS
rsrp-ThresholdCSI-RS	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [2].
Note: For further information see clause 6.3.2 in TS 38.331 [2].		

A.3.8.2.4 FR1 PRACH configuration 4

FR1 PRACH configuration 4 in this clause provides the PRACH configuration for CSI-RS based non-contention based random access in FR1 to convey BFR.

Table A.3.8.2.4-1: Parameters for FR1 PRACH configuration 4

Field	Value	Comment
prach-ConfigurationIndex	102	10ms PRACH periodicity, and other detailed configuration defined in table 6.3.3.2-2 and table 6.3.3.2-3 in TS 38.211 [6].
totalNumberOfRA-Preambles	48	Total number of preambles used for contention based and contention free random access
numberOfRA-PreamblesGroupA	48	No group B.
prach-RootSequenceIndex	0	Logic sequence index = 0, resulting in root sequence = 1.
ssb-perRACH-Occasion	oneFourth	OneFourth: 1 SSB associated with 4 RACH occasions
msg1-FDM	One	One PRACH transmission occasions FDMed in one time instance.
powerRampingStep	dB2	
preambleReceivedTargetPower	dBm-120	
preambleTransMax	n200	Max number of RA preamble transmission performed before declaring a failure is 200
ra-ResponseWindow	sl1	1 slot
zeroCorrelationZoneConfig	11	N-CS configuration, N_{CS} = 93
Backoff Parameter Index	2	20ms, as defined in table 7.2-1 in TS 38.321 [7].
BFR-CSIRS-Resource	ra-PreambleIndex = 50	Associated with CSI-RS configured
ra-OccasionList	1	RA occasions allowed corresponding to CSI-RS
rsrp-ThresholdSSB	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [2].
Note: For further information see clause 6.3.2 in TS 38.331 [2].		

A.3.8.3 PRACH configurations in FR2

A.3.8.3.1 FR2 PRACH configuration 1

FR2 PRACH configuration 1 in this clause provides the typical PRACH configuration for SSB-based contention based random access in FR2.

Table A.3.8.3.1-1: Parameters for FR2 PRACH configuration 1

Field	Value	Comment
prach-ConfigurationIndex	190	Preamble Format C2, with 10ms PRACH periodicity, and other detailed configuration defined in table 6.3.3.2-4 in TS 38.211 [6].
msg1-SubcarrierSpacing	Same as UL carrier SCS	
totalNumberOfRA-Preambles	48	Total number of preambles used for contention based and contention free random access
numberOfRA-PreamblesGroupA	48	No group B.
prach-RootSequenceIndex	0	Logic sequence index = 0, resulting in root sequence = 1.
ssb-perRACH-OccasionAndCB-PreamblesPerSSB	oneFourth, n48	OneFourth: 1 SSB associated with 4 RACH occasions n48: 48 contention based preambles per SSB
msg1-FDM	One	One PRACH transmission occasions FDMed in one time instance.
rsrp-ThresholdSSB	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [2].
ra-ContentionResolutionTimer	sf48	48 sub-frames
powerRampingStep	dB2	
preambleReceivedTargetPower	dBm-120	
preambleTransMax	n6	Max number of RA preamble transmission performed before declaring a failure is 6
ra-ResponseWindow	sl10	10 slots
zeroCorrelationZoneConfig	11	N-CS configuration, N_{CS} = 23
Backoff Parameter Index	2	20 ms, as defined in table 7.2-1 in TS 38.321 [7].
Note: For further information see clause 6.3.2 in TS 38.331 [2].		

A.3.8.3.2 FR2 PRACH configuration 2

FR2 PRACH configuration 2 in this clause provides the typical PRACH configuration for SSB based non-contention based random access in FR2.

Table A.3.8.3.2-1: Parameters for FR2 PRACH configuration 2

Field	Value	Comment
prach-ConfigurationIndex	190	Preamble Format C2, with 10ms PRACH periodicity, and other detailed configuration defined in table 6.3.3.2-4 in TS 38.211 [6].
msg1-SubcarrierSpacing	Same as UL carrier SCS	
totalNumberOfRA-Preambles	48	Total number of preambles used for contention based and contention free random access
numberOfRA-PreamblesGroupA	48	No group B.
prach-RootSequenceIndex	0	Logic sequence index = 0, resulting in root sequence = 1.
ssb-perRACH-Occasion	oneFourth	OneFourth: 1 SSB associated with 4 RACH occasions
msg1-FDM	One	One PRACH transmission occasions FDMed in one time instance.
powerRampingStep	dB2	
preambleReceivedTargetPower	dBm-120	
preambleTransMax	n6	Max number of RA preamble transmission performed before declaring a failure is 6
ra-ResponseWindow	sl10	10 slots
zeroCorrelationZoneConfig	11	N-CS configuration, N_{CS} = 23

Backoff Parameter Index	2	20 ms, as defined in table 7.2-1 in TS 38.321 [7].
ssb-ResourceList	ra-PreambleIndex = 50	Associated with SSB index 0. UE doesn't use ssb-ResourceList and BFR-SSB-Resource IEs at the same time. UE doesn't use this field if is transmitting CFRA to convey BFR.
BFR-SSB-Resource	ra-PreambleIndex = 50	Associated with SSB index 0. UE doesn't use ssb-ResourceList and BFR-SSB-Resource IEs at the same time. UE uses this field only if is transmitting CFRA to convey BFR
ra-ssb-OccasionMaskIndex	1	PRACH occasion index 1 is allowed
rsrp-ThresholdSSB	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [2].
Note: For further information see clause 6.3.2 in TS 38.331 [2].		

A.3.8.3.3 FR2 PRACH configuration 3

FR2 PRACH configuration 3 in this clause provides the typical PRACH configuration for CSI-RS based non-contention based random access in FR2.

Table A.3.8.3.3-1: Parameters for FR2 PRACH configuration 3Field	**Value**	**Comment**
prach-ConfigurationIndex	190	Preamble Format C2, with 10ms PRACH periodicity, and other detailed configuration defined in table 6.3.3.2-4 in TS 38.211 [6].
msg1-SubcarrierSpacing	Same as UL carrier SCS	
totalNumberOfRA-Preambles	48	Total number of preambles used for contention based and contention free random acces
numberOfRA-PreamblesGroupA	48	No group B.
prach-RootSequenceIndex	0	Logic sequence index = 0, resulting in root sequence = 1.
ssb-perRACH-Occasion	oneFourth	OneFourth: 1 SSB associated with 4 RACH occasions
msg1-FDM	One	One PRACH transmission occasions FDMed in one time instance.
powerRampingStep	dB2	
preambleReceivedTargetPower	dBm-120	
preambleTransMax	n6	Max number of RA preamble transmission performed before declaring a failure is 6
ra-ResponseWindow	sl10	10 slots
zeroCorrelationZoneConfig	11	N-CS configuration, N_{CS} = 23
Backoff Parameter Index	2	20 ms, as defined in table 7.2-1 in TS 38.321 [7].
csirs-ResourceList	ra-PreambleIndex = 50	Associated with CSI-RS configured
ra-OccasionList	1	RA occasions allowed corresponding to CSI-RS
rsrp-ThresholdCSI-RS	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [2].
Note: For further information see clause 6.3.2 in TS 38.331 [2].		

A.3.8.3.4 FR2 PRACH configuration 4

FR2 PRACH configuration 4 in this clause provides the PRACH configuration for CSI-RS based non-contention based random access in FR2 to convey BFR.

Table A.3.8.3.4-1: Parameters for FR2 PRACH configuration 4

Field	Value	Comment
prach-ConfigurationIndex	190	Preamble Format C2, with 10ms PRACH periodicity, and other detailed configuration defined in table 6.3.3.2-4 in TS 38.211 [6].
msg1-SubcarrierSpacing	Same as UL carrier SCS	
totalNumberOfRA-Preambles	48	Total number of preambles used for contention based and contention free random access
numberOfRA-PreamblesGroupA	48	No group B.
prach-RootSequenceIndex	0	Logic sequence index = 0, resulting in root sequence = 1.
ssb-perRACH-Occasion	oneFourth	OneFourth: 1 SSB associated with 4 RACH occasions
msg1-FDM	One	One PRACH transmission occasions FDMed in one time instance.
powerRampingStep	dB2	
preambleReceivedTargetPower	dBm-120	
preambleTransMax	n200	Max number of RA preamble transmission performed before declaring a failure is 200.
ra-ResponseWindow	sl40	40 slots
zeroCorrelationZoneConfig	11	N-CS configuration, N_{CS} = 23
Backoff Parameter Index	2	20 ms, as defined in table 7.2-1 in TS 38.321 [7].
BFR-CSIRS-Resource	ra-PreambleIndex = 50	Associated with CSI-RS configured
ra-OccasionList	1	RA occasions allowed corresponding to CSI-RS
rsrp-ThresholdSSB	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [2].
Note: For further information see clause 6.3.2 in TS 38.331 [2].		

A.3.8A PRACH configurations under CCA

A.3.8A.1 Introduction

This clause provides the typical PRACH configurations used for RRM test cases defined in Annex A. To note that for other parameters not listed in this clause, either it can be derived from the set up of each test or it is subjected to RAN5 specifications.

A.3.8A.2 PRACH configurations in FR1

A.3.8A.2.1 FR1 PRACH configuration 1 under CCA

FR1 PRACH configuration 1 under CCA in this clause provides the typical PRACH configuration for SSB-based contention based random access in FR1.

Table A.3.8A.2.1-1: Parameters for FR1 PRACH configuration 1 under CCA

Field	Value	Comment
prach-ConfigurationIndex	102	10ms PRACH periodicity, and other detailed configuration defined in table 6.3.3.2-2 and table 6.3.3.2-3 in TS 38.211 [6].
msg1-SubcarrierSpacing	Same as UL carrier SCS	

totalNumberOfRA-Preambles	48	Total number of preambles used for contention based and contention free random access
numberOfRA-PreamblesGroupA	48	No group B.
prach-RootSequenceIndex	0	Logic sequence index = 0, resulting in root sequence = 1.
ssb-perRACH-OccasionAndCB-PreamblesPerSSB	oneFourth, n48	OneFourth: 1 SSB associated with 4 RACH occasions n48: 48 contention based preambles per SSB
msg1-FDM	One	One PRACH transmission occasions FDMed in one time instance.
rsrp-ThresholdSSB	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [2].
ra-ContentionResolutionTimer	sf48	48 sub-frames
powerRampingStep	dB2	
preambleReceivedTargetPower	dBm-114	Increased by 6 dB compared with FR1 PRACH configuration 1 for random access test with UL CCA failures.
preambleTransMax	n20	Max number of RA preamble transmission performed before declaring a failure is 20 to account for CCA failures
ra-ResponseWindow	Sl20	20 slots
zeroCorrelationZoneConfig	11	N-CS configuration, N_{CS} = 23
Backoff Parameter Index	2	20ms, as defined in table 7.2-1 in TS 38.321 [7].
Note: For further information see clause 6.3.2 in TS 38.331 [2].		

A.3.8A.2.2 FR1 PRACH configuration 2 under CCA

FR1 PRACH configuration 2 under CCA in this clause provides the typical PRACH configuration for SSB based non-contention based random access in FR1.

Table A.3.8A.2.2-1: Parameters for FR1 PRACH configuration 2 under CCA

Field	Value	Comment
prach-ConfigurationIndex	102	10ms PRACH periodicity, and other detailed configuration defined in table 6.3.3.2-2 and table 6.3.3.2-3 in TS 38.211 [6].
msg1-SubcarrierSpacing	Same as UL carrier SCS	
totalNumberOfRA-Preambles	48	Total number of preambles used for contention based and contention free random access
numberOfRA-PreamblesGroupA	48	No group B.
prach-RootSequenceIndex	0	Logic sequence index = 0, resulting in root sequence = 1.
ssb-perRACH-Occasion	oneFourth	OneFourth: 1 SSB associated with 4 RACH occasions
msg1-FDM	One	One PRACH transmission occasions FDMed in one time instance.
powerRampingStep	dB2	
preambleReceivedTargetPower	dBm-114	Increased by 6 dB compared with FR1 PRACH configuration 2 for random access test with UL CCA failures.
preambleTransMax	n20	Max number of RA preamble transmission performed before declaring a failure is 20 to account for CCA failures
ra-ResponseWindow	sl20	20 slots
zeroCorrelationZoneConfig	11	N-CS configuration, N_{CS} = 23
Backoff Parameter Index	2	20ms, as defined in table 7.2-1 in TS 38.321 [7].

ssb-ResourceList	ra-PreambleIndex = 50	Associated with SSB index 0. UE doesn't use ssb-ResourceList and BFR-SSB-Resource IEs at the same time. UE doesn't use this field if is transmitting CFRA to convey BFR.
BFR-SSB-Resource	ra-PreambleIndex = 50	Associated with SSB index 0. UE doesn't use ssb-ResourceList and BFR-SSB-Resource IEs at the same time. UE uses this field only if is transmitting CFRA to convey BFR
ra-ssb-OccasionMaskIndex	1	PRACH occasion index 1 is allowed
rsrp-ThresholdSSB	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [2].
Note: For further information see clause 6.3.2 in TS 38.331 [2].		

A.3.9 BWP configurations

A.3.9.1 Introduction

This clause provides the typical BWP configurations used for RRM test cases defined in Annex A. For downlink BWP, both initial BWP and dedicated BWP configurations are specified in clause A.3.9.2 and for uplink BWP, both initial BWP and dedicated BWP configurations are specified in clause A.3.9.3. To note that for other parameters not listed in this clause, either it can be derived from the set up of each test or it is subjected to RAN5 specifications.

A.3.9.2 Downlink BWP configurations

A.3.9.2.1 Initial BWP

Table A.3.9.2.1-1: Downlink BWP patterns for initial BWP configuration

BWP Parameters	Unit	Values		
Reference BWP		DLBWP.0.1	DLBWP.0.2	
Starting PRB index		0	RB_c Note 1	
Bandwidth	RB	Same as RF channel defined in each test	same as RMSI CORESET (CORESET #0) defined in each test	
Note 1: RB_c is the lowest PRB index to guarantee the BWP including CORESET #0 which is defined in Clause A.3.1.2.				

A.3.9.2.2 Dedicated BWP

Table A.3.9.2.2-1: Downlink BWP patterns for dedicated BWP configuration

BWP Parameters	Unit	Values					
Reference BWP		DLBWP.1.1	DLBWP.1.2	DLBWP.1.3	DLBWP.1.4	DLBWP.1.5	DLBWP.1.6
Starting PRB index		0	RB_b Note 1	RB_a Note 2	0	RB_b Note 1	RB_a Note 2
Bandwidth	RB	Same as RF channel defined in each test	25 for SSB SCS = 15KHz,	25 for SSB SCS = 15KHz,	24 for SSB SCS = 120KHz	24 for SSB SCS = 120KHz	24 for SSB SCS = 120KHz

			51 for SSB SCS = 30KHz, 32 for SSB SCS = 120KHz 48 for SSB SCS = 240KHz	51 for SSB SCS = 30KHz, 32 for SSB SCS = 120KHz 48 for SSB SCS = 240KHz	24 for SSB SCS = 240KHz	24 for SSB SCS = 240KHz	24 for SSB SCS = 240KHz
Note 1: RB_b is the lowest PRB index to guarantee the BWP not fully overlapped with SSB PRB index (RB_J, RB_{J+1},…., RB_{J+19}) which is defined in Clause A.3.10.							
Note 2: RB_a is the lowest PRB index to guarantee the BWP including SSB PRB index (RB_J, RB_{J+1},…., RB_{J+19}) which is defined in Clause A.3.10.							

A.3.9.3 Uplink BWP configurations

A.3.9.3.1 Initial BWP

Table A.3.9.3.1-1: Uplink BWP patterns for initial BWP configuration

BWP Parameters	Unit	Values		
Reference BWP		ULBWP.0.1	ULBWP.0.2	
Starting PRB index		0	RB_c Note 1	
Bandwidth	RB	Same as RF channel defined in each test	same as RMSI CORESET (CORESET #0) defined in each test	
Note 1: RB_c is same as RB_c for DLBWP.0.2 as defined in Table A.3.9.2.1-1.				

A.3.9.3.2 Dedicated BWP

Table A.3.9.3.2-1: Uplink BWP patterns for dedicated BWP configuration

BWP Parameters	Unit	Values					
Reference BWP		ULBWP.1.1	ULBWP.1.2	ULBWP.1.3	ULBWP.1.4	ULBWP.1.5	ULBWP.1.6
Starting PRB index		0	RB_b Note 1	RB_a Note 2	0	RB_b Note 1	RB_a Note 2
Bandwidth	RB	Same as RF channel defined in each test	25 for SSB SCS = 15KHz, 51 for SSB SCS = 30KHz, 32 for SSB SCS = 120KHz 48 for SSB SCS = 240KHz	25 for SSB SCS = 15KHz, 51 for SSB SCS = 30KHz, 32 for SSB SCS = 120KHz 48 for SSB SCS = 240KHz	24 for SSB SCS = 120KHz 24 for SSB SCS = 240KHz	24 for SSB SCS = 120KHz 24 for SSB SCS = 240KHz	24 for SSB SCS = 120KHz 24 for SSB SCS = 240KHz
Note 1: RB_b is same as RB_b for DLBWP.1.2 as defined in Table A.3.9.2.2-1.							
Note 2: RB_a is same as RB_a for DLBWP.1.3 as defined in Table A.3.9.2.2-1.							

A.3.9A BWP configurations for RedCap

A.3.9A.1 Introduction

This clause provides the typical BWP configurations used for RedCap RRM test cases defined in Annex A. For downlink BWP, RedCap dedicated BWP configurations are specified in clause A.3.9A.2 and for uplink BWP, RedCap dedicated BWP configurations are specified in clause A.3.9A.3. To note that for other parameters not listed in this clause, either it can be derived from the set up of each test or it is subjected to RAN5 specifications.

A.3.9A.2 Downlink BWP configurations

A.3.9A.2.1 Dedicated BWP

Table A.3.9A.2.2-1: Downlink BWP patterns for RedCap dedicated BWP configuration

BWP Parameters	Unit	Values		
Reference BWP		**DLBWP.1.1 RedCap**	**DLBWP.1.2 RedCap**	**DLBWP.1.3 RedCap**
Starting PRB index		RB_a Note 1	RB_b Note 2	RB_c Note 3
Bandwidth	RB	25 for SSB SCS = 15KHz, 51 for SSB SCS = 30KHz, 32 for SSB SCS = 120KHz 16 for SSB SCS = 240KHz	25 for SSB SCS = 15KHz, 51 for SSB SCS = 30KHz, 32 for SSB SCS = 120KHz 16 for SSB SCS = 240KHz	52 for SSB SCS = 15KHz, 51 for SSB SCS = 30KHz, 66 for SSB SCS = 120KHz 32 for SSB SCS = 240KHz
Note 1: RB_a is the lowest PRB index to guarantee the BWP including SSB PRB index (RB_J, RB_{J+1},…., RB_{J+19}) which is defined in Clause A.3.10. Note 2: RB_b is the lowest PRB index to guarantee the BWP not fully overlapped with SSB PRB index (RB_J, RB_{J+1},…., RB_{J+19}) which is defined in Clause A.3.10. Note 3: RB_c is the lowest PRB index to guarantee the BWP including SSB PRB index (RB_J, RB_{J+1},…., RB_{J+19}) which is defined in Clause A.3.10.				

A.3.9A.3 Uplink BWP configurations

A.3.9A.3.2 Dedicated BWP

Table A.3.9A.3.2-1: Uplink BWP patterns for RedCap dedicated BWP configuration

BWP Parameters	Unit	Values		
Reference BWP		**ULBWP.1.1 RedCap**	**ULBWP.1.2 RedCap**	**ULBWP.1.3 RedCap**
Starting PRB index		RB_a Note 1	RB_b Note 2	RB_c Note 3
Bandwidth	RB	25 for SSB SCS = 15KHz, 51 for SSB SCS = 30KHz, 32 for SSB SCS = 120KHz 16 for SSB SCS = 240KHz	25 for SSB SCS = 15KHz, 51 for SSB SCS = 30KHz, 32 for SSB SCS = 120KHz 16 for SSB SCS = 240KHz	52 for SSB SCS = 15KHz, 51 for SSB SCS = 30KHz, 66 for SSB SCS = 120KHz 32 for SSB SCS = 240KHz
Note 1: RB_a is the same as RB_a for DLBWP.1.1 RedCap. Note 2: RB_b is the same as RB_b for DLBWP.1.2 RedCap. Note 3: RB_c is the same as RB_c for DLBWP.1.3 RedCap.				

A.3.10 SSB Configurations

A.3.10.1 SSB Configurations for FR1

A.3.10.1.1 SSB pattern 1 in FR1: SSB allocation for SSB SCS=15 kHz in 10 MHz

Table A.3.10.1.1-1: SSB.1 FR1: SSB Pattern 1 for SSB SCS=15 kHz in 10 MHz channel

SSB Parameters	Values
Channel bandwidth	10 MHz
SSB SCS	15 kHz
SSB periodicity (T_{SSB})	20 ms
Number of SSBs per SS-burst	1
SS/PBCH block index	0
Symbol numbers containing SSB Note 2	2-5
Slot numbers containing SSB Note 2	0
SFN containing SSB	SFN mod (max(T_{SSB},10ms)/10ms) = 0
RB numbers containing SSB within channel BW	(RB_J, RB_{J+1},…., RB_{J+19})Note 1
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13]. Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.	

A.3.10.1.2 SSB pattern 2 in FR1: SSB allocation for SSB SCS=30 kHz in 40 MHz

Table A.3.10.1.2-1: SSB.2 FR1: SSB Pattern 2 for SSB SCS=30 kHz in 40 MHz channel

SSB Parameters	Values
Channel bandwidth	40 MHz
SSB SCS	30 kHz
SSB periodicity (T_{SSB})	20 ms
Number of SSBs per SS-burst	1
SS/PBCH block index	0
Symbol numbers containing SSB Note 3	4-7 or 2-5 Note 2
Slot numbers containing SSB Note 3	0
SFN containing SSB	SFN mod (max(T_{SSB},10ms)/10ms) = 0
RB numbers containing SSB within channel BW	(RB_J, RB_{J+1},…., RB_{J+19})Note 1
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13]. Note 2: Symbols 4-7 is chosen, if the SSB pattern Case B should be used for the current band as indicated by Table 5.4.3.3-1 of TS 38.104 [13]; Otherwise, symbol 2-5 is chosen. Note 3: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves	

A.3.10.1.3 SSB pattern 3 in FR1: SSB allocation for SSB SCS=15 kHz in 10 MHz

Table A.3.10.1.3-1: SSB.3 FR1: SSB Pattern 3 for SSB SCS=15 kHz in 10 MHz channel

SSB Parameters	Values
Channel bandwidth	10 MHz

SSB SCS	15 kHz	
SSB periodicity (T_{SSB})	20 ms	
Number of SSBs per SS-burst	2	
SS/PBCH block index	0	1
Symbol numbers containing SSB Note 2	2-5	8-11
Slot numbers containing SSB Note 2	0	0
SFN containing SSB	SFN mod ($max(T_{SSB},10ms)/10ms$) = 0	
RB numbers containing SSB within channel BW	(RB_J, RB_{J+1},…., RB_{J+19})Note 1	
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13]. Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.		

A.3.10.1.4 SSB pattern 4 in FR1: SSB allocation for SSB SCS=30 kHz in 40 MHz

Table A.3.10.1.4-1: SSB.4 FR1: SSB Pattern 4 for SSB SCS=30 kHz in 40 MHz channel

SSB Parameters	Values	
Channel bandwidth	40 MHz	
SSB SCS	30 kHz	
SSB periodicity (T_{SSB})	20 ms	
Number of SSBs per SS-burst	2	
SS/PBCH block index	0	1
Symbol numbers containing SSB Note 3	4-7 or 2-5 Note 2	8-11
Slot numbers containing SSB Note 3	0	0
SFN containing SSB	SFN mod ($max(T_{SSB},10ms)/10ms$) = 0	
RB numbers containing SSB within channel BW	(RB_J, RB_{J+1},…., RB_{J+19})Note 1	
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13]. Note 2: Symbols 4-7 is chosen, if the SSB pattern Case B should be used for the current band as indicated by Table 5.4.3.3-1 of TS 38.104 [13]; Otherwise, symbol 2-5 is chosen. Note 3: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.		

A.3.10.1.5 SSB pattern 5 in FR1: SSB allocation for SSB SCS=15 kHz starting from odd SFN in 10 MHz

Table A.3.10.1.5-1: SSB.5 FR1: SSB Pattern 5 for SSB SCS=15 kHz in 10 MHz channel

SSB Parameters	Values
Channel bandwidth	10 MHz
SSB SCS	15 kHz
SSB periodicity (T_{SSB})	20 ms
Number of SSBs per SS-burst	1
SS/PBCH block index	0
Symbol numbers containing SSB Note 2	2-5
Slot numbers containing SSB Note 2	0
SFN containing SSB	SFN mod ($max(T_{SSB},10ms)/10ms$) = 1
RB numbers containing SSB within channel BW	(RB_J, RB_{J+1},…., RB_{J+19})Note 1
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13].	

Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.

A.3.10.1.6 SSB pattern 6 in FR1: SSB allocation for SSB SCS=30 kHz starting from odd SFN in 40 MHz

Table A.3.10.1.6-1: SSB.6 FR1: SSB Pattern 6 for SSB SCS=30 kHz in 40 MHz channel

SSB Parameters	Values
Channel bandwidth	40 MHz
SSB SCS	30 kHz
SSB periodicity (T_{SSB})	20 ms
Number of SSBs per SS-burst	1
SS/PBCH block index	0
Symbol numbers containing SSB Note 3	4-7 or 2-5 Note 2
Slot numbers containing SSB Note 3	0
SFN containing SSB	SFN mod (max(T_{SSB},10ms)/10ms) = 1
RB numbers containing SSB within channel BW	(RB_J, RB_{J+1},…., RB_{J+19}) Note 1
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13]. Note 2: Symbols 4-7 is chosen, if the SSB pattern Case B should be used for the current band as indicated by Table 5.4.3.3-1 of TS 38.104 [13]; Otherwise, symbol 2-5 is chosen. Note 3: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.	

A.3.10.1.7 SSB pattern 7 in FR1: SSB allocation for SSB SCS=15 kHz in 10 MHz

Table A.3.10.1.7-1: SSB.7 FR1: SSB Pattern 7 for SSB SCS=15 kHz in 10 MHz channel

SSB Parameters	Values	
Channel bandwidth	10 MHz	
SSB SCS	15 kHz	
SSB periodicity (T_{SSB})	20 ms	
Number of SSBs per SS-burst	2	
SS/PBCH block index	2	3
Symbol numbers containing SSB Note 2	2-5	8-11
Slot numbers containing SSB Note 2	1	1
SFN containing SSB	SFN mod (max(T_{SSB},10ms)/10ms) = 0	
RB numbers containing SSB within channel BW	(RB_J, RB_{J+1},…., RB_{J+19}) Note 1	
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13]. Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.		

A.3.10.1.8 SSB pattern 8 in FR1: SSB allocation for SSB SCS=30 kHz in 40 MHz

Table A.3.10.1.8-1: SSB.8 FR1: SSB Pattern 8 for SSB SCS=30 kHz in 40 MHz channel

SSB Parameters	Values
Channel bandwidth	40 MHz
SSB SCS	30 kHz
SSB periodicity (T_{SSB})	20 ms
Number of SSBs per SS-burst	2

SS/PBCH block index	2	3
Symbol numbers containing SSB Note 3	4-7 or 2-5 Note 2	8-11
Slot numbers containing SSB Note 3	1	1
SFN containing SSB	SFN mod (max(T_{SSB},10ms)/10ms) = 0	
RB numbers containing SSB within channel BW	(RB_J, RB_{J+1},…., RB_{J+19})Note 1	
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13]. Note 2: Symbols 4-7 is chosen, if the SSB pattern Case B should be used for the current band as indicated by Table 5.4.3.3-1 of TS 38.104 [13]; Otherwise, symbol 2-5 is chosen. Note 3: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.		

A.3.10.2 SSB Configurations for FR2

A.3.10.2.1 SSB pattern 1 in FR2: SSB allocation for SSB SCS=120 kHz in 100 MHz

Table A.3.10.2.1-1: SSB.1 FR2: SSB Pattern 1 for SSB SCS = 120 kHz in 100 MHz channel with 2 SSBs per SS-burst

SSB Parameters	Values	
Channel bandwidth	100 MHz	
SSB SCS	120 kHz	
SSB periodicity (T_{SSB})	20 ms	
Number of SSBs per SS-burst	2	
SS/PBCH block index	0	1
Symbol numbers containing SSBs Note 2	4-7	8-11
Slot numbers containing SSB Note 2	0	0
SFN containing SSB	SFN mod (max(T_{SSB},10ms)/10ms) = 0	
RB numbers containing SSBs within channel BW	(RB_J, RB_{J+1},…., RB_{J+19})Note 1	
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13]. Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.		

A.3.10.2.2 SSB pattern 2 in FR2: SSB allocation for SSB SCS=240 kHz in 100 MHz

Table A.3.10.2.2-1: SSB.2 FR2: SSB Pattern 2 for SSB SCS = 240 kHz in 100 MHz channel with 2 SSBs per SS-burst

SSB Parameters	Values	
Channel bandwidth	100 MHz	
SSB SCS	240 kHz	
SSB periodicity (T_{SSB})	20 ms	
Number of SSBs per SS-burst	2	
SS/PBCH block index	0	1
Symbol numbers containing SSBs Note 2	8-11	12-13, 0-1
Slot numbers containing SSB Note 2	0	0, 1
SFN containing SSB	SFN mod (max(T_{SSB},10ms)/10ms) = 0	
RB numbers containing SSBs within channel BW	(RB_J, RB_{J+1},…., RB_{J+39})Note 1	
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13]. Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.		

A.3.10.2.3 SSB pattern 3 in FR2: SSB allocation for SSB SCS=120 kHz in 100 MHz

Table A.3.10.2.3-1: SSB.3 FR2: SSB Pattern 3 for SSB SCS = 120 kHz in 100 MHz channel with 1 SSB per SS-burst

SSB Parameters	Values
Channel bandwidth	100 MHz
SSB SCS	120 kHz
SSB periodicity (T_{SSB})	20 ms
Number of SSBs per SS-burst	1
SS/PBCH block index	0
Symbol numbers containing SSBs Note 2	4-7
Slot numbers containing SSB Note 2	0
SFN containing SSB	SFN mod ($max(T_{SSB}$,10ms)/10ms) = 0
RB numbers containing SSBs within channel BW	(RB_J, RB_{J+1},…., RB_{J+19})Note 1
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13]. Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.	

A.3.10.2.4 SSB pattern 4 in FR2: SSB allocation for SSB SCS=240 kHz in 100 MHz

Table A.3.10.2.4-1: SSB.4 FR2: SSB Pattern 4 for SSB SCS = 240 kHz in 100 MHz channel with 1 SSB per SS-burst

SSB Parameters	Values
Channel bandwidth	100 MHz
SSB SCS	240 kHz
SSB periodicity (T_{SSB})	20 ms
Number of SSBs per SS-burst	1
SS/PBCH block index	0
Symbol numbers containing SSBs Note 2	8-11
Slot numbers containing SSB Note 2	0
SFN containing SSB	SFN mod ($max(T_{SSB}$,10ms)/10ms) = 0
RB numbers containing SSBs within channel BW	(RB_J, RB_{J+1},…., RB_{J+39})Note 1
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13]. Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.	

A.3.10.2.5 SSB pattern 5 in FR2: SSB allocation for SSB SCS=120 kHz in 100 MHz

Table A.3.10.2.5-1: SSB.5 FR2: SSB Pattern 5 for SSB SCS = 120 kHz in 100 MHz channel with 2 SSBs per SS-burst

SSB Parameters	Values	
Channel bandwidth	100 MHz	
SSB SCS	120 kHz	
SSB periodicity (T_{SSB})	20 ms	
Number of SSBs per SS-burst	2	
SS/PBCH block index	2	3
Symbol numbers containing SSBs Note 2	2-5	6-9
Slot numbers containing SSB Note 2	1	1

SFN containing SSB	SFN mod (max(T_{SSB},10ms)/10ms) = 0
RB numbers containing SSBs within channel BW	(RB_J, RB_{J+1},…., RB_{J+19})Note 1
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13].	
Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.	

A.3.10.2.6 SSB pattern 6 in FR2: SSB allocation for SSB SCS=240 kHz in 100 MHz

Table A.3.10.2.6-1: SSB.6 FR2: SSB Pattern 6 for SSB SCS = 240 kHz in 100 MHz channel with 2 SSBs per SS-burst

SSB Parameters	Values	
Channel bandwidth	100 MHz	
SSB SCS	240 kHz	
SSB periodicity (T_{SSB})	20 ms	
Number of SSBs per SS-burst	2	
SS/PBCH block index	2	3
Symbol numbers containing SSBs Note 2	2-5	6-9
Slot numbers containing SSB Note 2	1	1
SFN containing SSB	SFN mod (max(T_{SSB},10ms)/10ms) = 0	
RB numbers containing SSBs within channel BW	(RB_J, RB_{J+1},…., RB_{J+39})Note 1	
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13].		
Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.		

A.3.10.2.7 SSB pattern 7 in FR2: SSB allocation for SSB SCS=120 kHz in 100 MHz

Table A.3.10.2.7-1: SSB.7 FR2: SSB Pattern 7 for SSB SCS = 120 kHz in 100 MHz channel with 1 SSB per SS-burst

SSB Parameters	Values
Channel bandwidth	100 MHz
SSB SCS	120 kHz
SSB periodicity (T_{SSB})	20 ms
Number of SSBs per SS-burst	1
SS/PBCH block index	1
Symbol numbers containing SSBs Note 2	8-11
Slot numbers containing SSB Note 2	0
SFN containing SSB	SFN mod (max(T_{SSB},10ms)/10ms) = 0
RB numbers containing SSBs within channel BW	(RB_J, RB_{J+1},…., RB_{J+19})Note 1
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13].	
Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.	

A.3.10.2.8 SSB pattern 8 in FR2: SSB allocation for SSB SCS=240 kHz in 100 MHz

Table A.3.10.2.8-1: SSB.8 FR2: SSB Pattern 8 for SSB SCS = 240 kHz in 100 MHz channel with 1 SSB per SS-burst

SSB Parameters	Values
Channel bandwidth	100 MHz

SSB SCS	240 kHz	
SSB periodicity (T_{SSB})	20 ms	
Number of SSBs per SS-burst	1	
SS/PBCH block index	1	
Symbol numbers containing SSBs Note 2	12-13	0-1
Slot numbers containing SSB Note 2	0	1
SFN containing SSB	SFN mod ($max(T_{SSB},10ms)/10ms$) = 0	
RB numbers containing SSBs within channel BW	(RB_J, RB_{J+1},…., RB_{J+39})Note 1	
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13]. Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.		

A.3.10.2.9 SSB pattern 9 in FR2: SSB allocation for SSB SCS=120 kHz in 100 MHz

Table A.3.10.2.9-1: SSB.9 FR2: SSB Pattern 9 for SSB SCS = 120 kHz in 100 MHz channel with 2 SSBs per SS-burst

SSB Parameters	Values	
Channel bandwidth	100 MHz	
SSB SCS	120 kHz	
SSB periodicity (T_{SSB})	20 ms	
Number of SSBs per SS-burst	2	
SS/PBCH block index	2	3
Symbol numbers containing SSBs Note 2	2-5	6-9
Slot numbers containing SSB Note 2	1	1
SFN containing SSB	SFN mod ($max(T_{SSB},10ms)/10ms$) = 0	
RB numbers containing SSBs within channel BW	(RB_J, RB_{J+1},…., RB_{J+19})Note 1	
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13]. Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.		

A.3.10.2.10 SSB pattern 10 in FR2: SSB allocation for SSB SCS=240 kHz in 100 MHz

Table A.3.10.2.10-1: SSB.10 FR2: SSB Pattern 10 for SSB SCS = 240 kHz in 100 MHz channel with 2 SSBs per SS-burst

SSB Parameters	Values	
Channel bandwidth	100 MHz	
SSB SCS	240 kHz	
SSB periodicity (T_{SSB})	20 ms	
Number of SSBs per SS-burst	2	
SS/PBCH block index	2	3
Symbol numbers containing SSBs Note 2	4-7	8-11
Slot numbers containing SSB Note 2	1	1
SFN containing SSB	SFN mod ($max(T_{SSB},10ms)/10ms$) = 0	
RB numbers containing SSBs within channel BW	(RB_J, RB_{J+1},…., RB_{J+39})Note 1	
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13]. Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.		

A.3.10.2.11 SSB pattern 9 in FR2: SSB allocation for SSB SCS=480 kHz in 400 MHz

Table A.3.10.2.11-1: SSB.9 FR2: SSB Pattern 9 for SSB SCS = 480 kHz in 400 MHz channel with 2 SSBs per SS-burst

SSB Parameters	Values	
Channel bandwidth	400 MHz	
SSB SCS	480 kHz	
SSB periodicity (T_{SSB})	20 ms	
Number of SSBs per SS-burst	2	
SS/PBCH block index	0	1
Symbol numbers containing SSBs Note 2	2-5	9-12
Slot numbers containing SSB Note 2	0	0
SFN containing SSB	SFN mod ($\max(T_{SSB},10ms)/10ms$) = 0	
RB numbers containing SSBs within channel BW	(RB_J, RB_{J+1},…., RB_{J+19}) Note 1	
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13]. Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.		

A.3.10.2.12 SSB pattern 10 in FR2: SSB allocation for SSB SCS=960 kHz in 400 MHz

Table A.3.10.2.12-1: SSB.10 FR2: SSB Pattern 10 for SSB SCS = 960 kHz in 400 MHz channel with 2 SSBs per SS-burst

SSB Parameters	Values	
Channel bandwidth	400 MHz	
SSB SCS	960 kHz	
SSB periodicity (T_{SSB})	20 ms	
Number of SSBs per SS-burst	2	
SS/PBCH block index	0	1
Symbol numbers containing SSBs Note 2	2-5	9-12
Slot numbers containing SSB Note 2	0	0
SFN containing SSB	SFN mod ($\max(T_{SSB},10ms)/10ms$) = 0	
RB numbers containing SSBs within channel BW	(RB_J, RB_{J+1},…., RB_{J+39}) Note 1	
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13]. Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.		

A.3.10.2.13 SSB pattern 11 in FR2: SSB allocation for SSB SCS=480 kHz in 400 MHz

Table A.3.10.2.13-1: SSB.11 FR2: SSB Pattern 11 for SSB SCS = 480 kHz in 400 MHz channel with 1 SSB per SS-burst

SSB Parameters	Values
Channel bandwidth	400 MHz
SSB SCS	480 kHz
SSB periodicity (T_{SSB})	20 ms
Number of SSBs per SS-burst	1
SS/PBCH block index	0
Symbol numbers containing SSBs Note 2	2-5
Slot numbers containing SSB Note 2	0

SFN containing SSB	SFN mod (max(T_{SSB},10ms)/10ms) = 0
RB numbers containing SSBs within channel BW	(RB_J, RB_{J+1},…., RB_{J+19})[Note 1]
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13]. Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.	

A.3.10.2.14 SSB pattern 12 in FR2: SSB allocation for SSB SCS=960 kHz in 400 MHz

Table A.3.10.2.14-1: SSB.12 FR2: SSB Pattern 12 for SSB SCS = 960 kHz in 400 MHz channel with 1 SSB per SS-burst

SSB Parameters	Values
Channel bandwidth	400 MHz
SSB SCS	960 kHz
SSB periodicity (T_{SSB})	20 ms
Number of SSBs per SS-burst	1
SS/PBCH block index	0
Symbol numbers containing SSBs [Note 2]	2-5
Slot numbers containing SSB [Note 2]	0
SFN containing SSB	SFN mod (max(T_{SSB},10ms)/10ms) = 0
RB numbers containing SSBs within channel BW	(RB_J, RB_{J+1},…., RB_{J+39})[Note 1]
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13]. Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.	

A.3.10.2.15 SSB pattern 13 in FR2: SSB allocation for SSB SCS=480 kHz in 400 MHz

Table A.3.10.2.15-1: SSB.13 FR2: SSB Pattern 13 for SSB SCS = 480 kHz in 400 MHz channel with 2 SSBs per SS-burst

SSB Parameters	Values	
Channel bandwidth	400 MHz	
SSB SCS	480 kHz	
SSB periodicity (T_{SSB})	20 ms	
Number of SSBs per SS-burst	2	
SS/PBCH block index	2	3
Symbol numbers containing SSBs [Note 2]	2-5	9-12
Slot numbers containing SSB [Note 2]	1	1
SFN containing SSB	SFN mod (max(T_{SSB},10ms)/10ms) = 0	
RB numbers containing SSBs within channel BW	(RB_J, RB_{J+1},…., RB_{J+19})[Note 1]	
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13]. Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.		

A.3.10.2.16 SSB pattern 14 in FR2: SSB allocation for SSB SCS=960 kHz in 400 MHz

Table A.3.10.2.16-1: SSB.14 FR2: SSB Pattern 14 for SSB SCS = 960 kHz in 400 MHz channel with 2 SSBs per SS-burst

SSB Parameters	Values	
Channel bandwidth	400 MHz	
SSB SCS	960 kHz	
SSB periodicity (T_{SSB})	20 ms	
Number of SSBs per SS-burst	2	
SS/PBCH block index	2	3
Symbol numbers containing SSBs Note 2	2-5	9-12
Slot numbers containing SSB Note 2	1	1
SFN containing SSB	SFN mod ($\max(T_{SSB},10ms)/10ms$) = 0	
RB numbers containing SSBs within channel BW	(RB_J, RB_{J+1},…., RB_{J+39}) Note 1	
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13]. Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.		

A.3.10.2.17 SSB pattern 15 in FR2: SSB allocation for SSB SCS=480 kHz in 400 MHz

Table A.3.10.2.17-1: SSB.15 FR2: SSB Pattern 15 for SSB SCS = 480 kHz in 400 MHz channel with 1 SSB per SS-burst

SSB Parameters	Values
Channel bandwidth	400 MHz
SSB SCS	480 kHz
SSB periodicity (T_{SSB})	20 ms
Number of SSBs per SS-burst	1
SS/PBCH block index	1
Symbol numbers containing SSBs Note 2	9-12
Slot numbers containing SSB Note 2	0
SFN containing SSB	SFN mod ($\max(T_{SSB},10ms)/10ms$) = 0
RB numbers containing SSBs within channel BW	(RB_J, RB_{J+1},…., RB_{J+19}) Note 1
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13]. Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.	

A.3.10.2.18 SSB pattern 16 in FR2: SSB allocation for SSB SCS=960 kHz in 400 MHz

Table A.3.10.2.18-1: SSB.16 FR2: SSB Pattern 16 for SSB SCS = 960 kHz in 400 MHz channel with 1 SSB per SS-burst

SSB Parameters	Values
Channel bandwidth	400 MHz
SSB SCS	960 kHz
SSB periodicity (T_{SSB})	20 ms
Number of SSBs per SS-burst	1
SS/PBCH block index	1
Symbol numbers containing SSBs Note 2	9-12
Slot numbers containing SSB Note 2	0

SFN containing SSB	SFN mod (max(T_{SSB},10ms)/10ms) = 0
RB numbers containing SSBs within channel BW	(RB_J, RB_{J+1},…., RB_{J+39})[Note 1]
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13]. Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.	

A.3.10A SSB Configurations under CCA

A.3.10A.1 SSB Configurations under CCA for FR1

A.3.10A.1.1 SSB pattern 1 under CCA for semi-static channel access: SSB allocation for SSB SCS=30kHz in 40MHz

Table A.3.10A.1.1-1: SSB.1 CCA: SSB Pattern 1 for SSB SCS=30 kHz in 40 MHz channel

SSB Parameters	Values
Channel bandwidth	40 MHz
SSB SCS	30 kHz
SSB periodicity (T_{SSB})	20 ms
Number of SSB indexes per SS-burst (N_{SSB}^{QCL})	1
Number of SS/PBCH block candidates per SSB index	1
SS/PBCH block candidate position	0
SS/PBCH block index	0
Symbol numbers containing SSB [Note 2]	2-5
Slot numbers containing SSB [Note 2]	0
SFN containing SSB	SFN mod (max(T_{SSB},10ms)/10ms) = 0
RB numbers containing SSB within channel BW	(RB_J, RB_{J+1},…., RB_{J+19})[Note 1]
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13]. Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves	

A.3.10A.1.2 SSB pattern 2 under CCA for dynamic channel access: SSB allocation for SSB SCS=30kHz in 40MHz

Table A.3.10A.1.2-1: SSB.2 CCA: SSB Pattern 2 for SSB SCS=30 kHz in 40 MHz channel

SSB Parameters	Values	
Channel bandwidth	40 MHz	
SSB SCS	30 kHz	
SSB periodicity (T_{SSB})	20 ms	
Number of SSB indexes per SS-burst (N_{SSB}^{QCL})	1	
Number of SS/PBCH block candidates per SSB index	2	
SS/PBCH block candidate position	0	2
SS/PBCH block index	0	0
Symbol numbers containing SSB [Note 2]	2-5	2-5
Slot numbers containing SSB [Note 2]	0	1
SFN containing SSB	SFN mod (max(T_{SSB},10ms)/10ms) = 0	
RB numbers containing SSB within channel BW	(RB_J, RB_{J+1},…., RB_{J+19})[Note 1]	

Note 1:	RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13].
Note 2:	These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves

A.3.10A.1.3 SSB pattern 3 under CCA for semi-static channel access: SSB allocation for SSB SCS=30 kHz in 40 MHz

Table A.3.10.1.3-1: SSB.3 CCA: SSB Pattern 3 for SSB SCS=30 kHz in 40 MHz channel

SSB Parameters	Values	
Channel bandwidth	40 MHz	
SSB SCS	30 kHz	
SSB periodicity (T_{SSB})	20 ms	
Number of SSB indexes per SS-burst (N_{SSB}^{QCL})	2	
Number of SS/PBCH block candidates per SSB index	1	
SS/PBCH block candidate position	0	1
SS/PBCH block index	0	1
Symbol numbers containing SSB Note 2	2-5	8-11
Slot numbers containing SSB Note 2	0	0
SFN containing SSB	SFN mod (max(T_{SSB},10ms)/10ms) = 0	
RB numbers containing SSB within channel BW	(RB_J, RB_{J+1},…., RB_{J+19}) Note 1	
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13].		
Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.		

A.3.10A.1.4 SSB pattern 4 under CCA for dynamic channel access: SSB allocation for SSB SCS=30 kHz in 40 MHz

Table A.3.10.1.4-1: SSB.4 CCA: SSB Pattern 4 for SSB SCS=30 kHz in 40 MHz channel

SSB Parameters	Values			
Channel bandwidth	40 MHz			
SSB SCS	30 kHz			
SSB periodicity (T_{SSB})	20 ms			
Number of SSB indexes per SS-burst (N_{SSB}^{QCL})	2			
Number of SS/PBCH block candidates per SSB index	2			
SS/PBCH block candidate position	0	2	1	3
SS/PBCH block index	0	0	1	1
Symbol numbers containing SSB Note 2	2-5	2-5	8-11	8-11
Slot numbers containing SSB Note 2	0	1	0	1
SFN containing SSB	SFN mod (max(T_{SSB},10ms)/10ms) = 0			
RB numbers containing SSB within channel BW	(RB_J, RB_{J+1},…., RB_{J+19}) Note 1			
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13].				
Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.				

A.3.10B SSB Configurations for RedCap

A.3.10B.1 SSB Configurations for FR1

A.3.10B.1.1 SSB pattern 1 for RedCap in FR1: SSB allocation for SSB SCS=30 kHz in 20 MHz

Table A.3.10B.1.1-1: SSB.1 RedCap FR1: SSB Pattern 1 for SSB SCS=30 kHz in 20 MHz channel

SSB Parameters	Values
Channel bandwidth	20 MHz
SSB SCS	30 kHz
SSB periodicity (T_{SSB})	20 ms
Number of SSBs per SS-burst	1
SS/PBCH block index	0
Symbol numbers containing SSB Note 3	4-7 or 2-5 Note 2
Slot numbers containing SSB Note 3	0
SFN containing SSB	SFN mod ($\max(T_{SSB},10ms)/10ms$) = 0
RB numbers containing SSB within channel BW	(RB_J, RB_{J+1},…., RB_{J+19}) Note 1
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13].	
Note 2: Symbols 4-7 is chosen, if the SSB pattern Case B should be used for the current band as indicated by Table 5.4.3.3-1 of TS 38.104 [13]; Otherwise, symbol 2-5 is chosen.	
Note 3: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves	

A.3.10B.1.2 SSB pattern 2 for RedCap in FR1: SSB allocation for SSB SCS=30 kHz in 20 MHz

Table A.3.10B.1.2-1: SSB.2 RedCap FR1: SSB Pattern 2 for SSB SCS=30 kHz in 20 MHz channel

SSB Parameters	Values	
Channel bandwidth	20 MHz	
SSB SCS	30 kHz	
SSB periodicity (T_{SSB})	20 ms	
Number of SSBs per SS-burst	2	
SS/PBCH block index	0	1
Symbol numbers containing SSB Note 3	4-7 or 2-5 Note 2	8-11
Slot numbers containing SSB Note 3	0	0
SFN containing SSB	SFN mod ($\max(T_{SSB},10ms)/10ms$) = 0	
RB numbers containing SSB within channel BW	(RB_J, RB_{J+1},…., RB_{J+19}) Note 1	
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13].		
Note 2: Symbols 4-7 is chosen, if the SSB pattern Case B should be used for the current band as indicated by Table 5.4.3.3-1 of TS 38.104 [13]; Otherwise, symbol 2-5 is chosen.		
Note 3: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.		

A.3.10B.1.3 SSB pattern 3 for RedCap in FR1: SSB allocation for SSB SCS=30 kHz starting from odd SFN in 20 MHz

Table A.3.10B.1.3-1: SSB.3 RedCap FR1: SSB Pattern 3 for SSB SCS=30 kHz in 20 MHz channel

SSB Parameters	Values
Channel bandwidth	20 MHz
SSB SCS	30 kHz
SSB periodicity (T_{SSB})	20 ms
Number of SSBs per SS-burst	1
SS/PBCH block index	0
Symbol numbers containing SSB Note 3	4-7 or 2-5 Note 2
Slot numbers containing SSB Note 3	0
SFN containing SSB	SFN mod (max(T_{SSB},10ms)/10ms) = 1
RB numbers containing SSB within channel BW	(RB_J, RB_{J+1},…., RB_{J+19}) Note 1
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13]. Note 2: Symbols 4-7 is chosen, if the SSB pattern Case B should be used for the current band as indicated by Table 5.4.3.3-1 of TS 38.104 [13]; Otherwise, symbol 2-5 is chosen. Note 3: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.	

A.3.10B.1.4 SSB pattern 4 for RedCap in FR1: SSB allocation for SSB SCS=15 kHz in 10 MHz

Table A.3.10B.1.4-1: SSB.4 RedCap FR1: SSB Pattern 4 for SSB SCS=15 kHz in 10 MHz channel

SSB Parameters	Values
Channel bandwidth	10 MHz
SSB SCS	15 kHz
SSB periodicity (T_{SSB})	20 ms
Number of SSBs per SS-burst	1
SS/PBCH block index	0
Symbol numbers containing SSB Note 2	2-5
Slot numbers containing SSB Note 2	0
SFN containing SSB	SFN mod (max(T_{SSB},10ms)/10ms) = 0
RB numbers containing SSB within channel BW	(RB_J, RB_{J+1},…., RB_{J+19}) Note 1
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13]. Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.	

A.3.10B.1.5 SSB pattern 5 for RedCap in FR1: SSB allocation for SSB SCS=30 kHz in 20 MHz

Table A.3.10B.1.5-1: SSB.5 RedCap FR1: SSB Pattern 5 for SSB SCS=30 kHz in 20 MHz channel

SSB Parameters	Values
Channel bandwidth	20 MHz
SSB SCS	30 kHz
SSB periodicity (T_{SSB})	20 ms
Number of SSBs per SS-burst	1
SS/PBCH block index	0

Symbol numbers containing SSB Note 3	4-7 or 2-5 Note 2
Slot numbers containing SSB Note 3	0
SFN containing SSB	SFN mod (max(T_{SSB},10ms)/10ms) = 0
RB numbers containing SSB within channel BW	(RB_J, RB_{J+1},…., RB_{J+19})Note 1
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13]. Note 2: Symbols 4-7 is chosen, if the SSB pattern Case B should be used for the current band as indicated by Table 5.4.3.3-1 of TS 38.104 [13]; Otherwise, symbol 2-5 is chosen. Note 3: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves	

A.3.10B.1.6 SSB pattern 6 for RedCap in FR1: SSB allocation for SSB SCS=15 kHz in 10 MHz

Table A.3.10B.1.6-1: SSB.6 RedCap FR1: SSB Pattern 6 for SSB SCS=15 kHz in 10 MHz channel

SSB Parameters	Values
Channel bandwidth	10 MHz
SSB SCS	15 kHz
SSB periodicity (T_{SSB})	80 ms
Number of SSBs per SS-burst	1
SS/PBCH block index	0
Symbol numbers containing SSB Note 2	2-5
Slot numbers containing SSB Note 2	5
SFN containing SSB	SFN mod (max(T_{SSB},10ms)/10ms) = 0
RB numbers containing SSB within channel BW	(RB_J, RB_{J+1},…., RB_{J+19})Note 1
Note 1: RBs containing SSB can be configured in any frequency location within the associated bandwidth part except the RBs for allowed synchronization raster defined in TS 38.104 [13]. Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.	

A.3.10B.1.7 SSB pattern 7 for RedCap in FR1: SSB allocation for SSB SCS=30 kHz in 20 MHz

Table A.3.10B.1.7-1: SSB.7 RedCap FR1: SSB Pattern 7 for SSB SCS=30 kHz in 40 MHz channel

SSB Parameters	Values
Channel bandwidth	20 MHz
SSB SCS	30 kHz
SSB periodicity (T_{SSB})	80 ms
Number of SSBs per SS-burst	1
SS/PBCH block index	0
Symbol numbers containing SSB Note 3	4-7 or 2-5 Note 2
Slot numbers containing SSB Note 3	10
SFN containing SSB	SFN mod (max(T_{SSB},10ms)/10ms) = 0
RB numbers containing SSB within channel BW	(RB_J, RB_{J+1},…., RB_{J+19})Note 1
Note 1: RBs containing SSB can be configured in any frequency location within the associated bandwidth part except the RBs for allowed synchronization raster defined in TS 38.104 [13]. Note 2: Symbols 4-7 is chosen, if the SSB pattern Case B should be used for the current band as indicated by Table 5.4.3.3-1 of TS 38.104 [13]; Otherwise, symbol 2-5 is chosen.	

Note 3:	These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves

A.3.10B.2 SSB Configurations for FR2

A.3.10B.2.1 SSB pattern 1 for RedCap in FR2: SSB allocation for SSB SCS=120 kHz in 100 MHz

Table A.3.10B.2.1-1: SSB.1 RedCap FR2: SSB Pattern 1 for SSB SCS = 120 kHz in 100 MHz channel with 1 SSB per SS-burst

SSB Parameters	Values
Channel bandwidth	100 MHz
SSB SCS	120 kHz
SSB periodicity (T_{SSB})	20 ms
Number of SSBs per SS-burst	1
SS/PBCH block index	0
Symbol numbers containing SSBs Note 2	4-7
Slot numbers containing SSB Note 2	0
SFN containing SSB	SFN mod (max(T_{SSB},10ms)/10ms) = 0
RB numbers containing SSBs within channel BW	(RB_J, RB_{J+1},…., RB_{J+19}) Note 1
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13]. Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.	

A.3.10B.2.2 SSB pattern 2 for RedCap in FR2: SSB allocation for SSB SCS=120 kHz in 100 MHz

Table A.3.10B.2.2-1: SSB.2 RedCap FR2: SSB Pattern 2 for SSB SCS = 120 kHz in 100 MHz channel with 1 SSB per SS-burst

SSB Parameters	Values
Channel bandwidth	100 MHz
SSB SCS	120 kHz
SSB periodicity (T_{SSB})	40 ms
Number of SSBs per SS-burst	1
SS/PBCH block index	0
Symbol numbers containing SSBs Note 2	4-7
Slot numbers containing SSB Note 2	0
SFN containing SSB	SFN mod (max(T_{SSB},10ms)/10ms) = 0
RB numbers containing SSBs within channel BW	(RB_J, RB_{J+1},…., RB_{J+19}) Note 1
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the RBs for allowed synchronization raster defined in TS 38.104 [13]. Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.	

A.3.10B.2.3 SSB pattern 3 for RedCap in FR2: SSB allocation for SSB SCS=120 kHz in 100 MHz

Table A.3.10B.2.3-1: SSB.3 RedCap FR2: SSB Pattern 3 for SSB SCS = 120 kHz in 100 MHz channel with 1 SSB per SS-burst

SSB Parameters	Values
Channel bandwidth	100 MHz
SSB SCS	120 kHz
SSB periodicity (T_{SSB})	80 ms
Number of SSBs per SS-burst	1
SS/PBCH block index	0
Symbol numbers containing SSBs Note 2	4-7
Slot numbers containing SSB Note 2	40
SFN containing SSB	SFN mod (max(T_{SSB},10ms)/10ms) = 0
RB numbers containing SSBs within channel BW	(RB_J, RB_{J+1},…., RB_{J+19}) Note 1
Note 1: RBs containing SSB can be configured in any frequency location within the associated bandwidth part except the RBs for allowed synchronization raster defined in TS 38.104 [13]. Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.	

A.3.10B.2.4 SSB pattern 4 for RedCap in FR2: SSB allocation for SSB SCS=240 kHz in 100 MHz

Table A.3.10B.2.4-1: SSB.4 RedCap FR2: SSB Pattern 4 for SSB SCS = 240 kHz in 100 MHz channel with 1 SSB per SS-burst

SSB Parameters	Values
Channel bandwidth	100 MHz
SSB SCS	240 kHz
SSB periodicity (T_{SSB})	40 ms
Number of SSBs per SS-burst	1
SS/PBCH block index	0
Symbol numbers containing SSBs Note 2	8-11
Slot numbers containing SSB Note 2	0
SFN containing SSB	SFN mod (max(T_{SSB},10ms)/10ms) = 0
RB numbers containing SSBs within channel BW	(RB_J, RB_{J+1},…., RB_{J+19}) Note 1
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the RBs for allowed synchronization raster defined in TS 38.104 [13]. Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.	

A.3.10B.2.5 SSB pattern 5 for RedCap in FR2: SSB allocation for SSB SCS=240 kHz in 100 MHz

Table A.3.10B.2.5-1: SSB.5 RedCap FR2: SSB Pattern 5 for SSB SCS = 240 kHz in 100 MHz channel with 1 SSB per SS-burst

SSB Parameters	Values
Channel bandwidth	100 MHz
SSB SCS	240 kHz
SSB periodicity (T_{SSB})	80 ms
Number of SSBs per SS-burst	1

SS/PBCH block index	0
Symbol numbers containing SSBs Note 2	8-11
Slot numbers containing SSB Note 2	80
SFN containing SSB	SFN mod (max(T_{SSB},10ms)/10ms) = 0
RB numbers containing SSBs within channel BW	(RB_J, RB_{J+1},…., RB_{J+19}) Note 1
Note 1: RBs containing SSB can be configured in any frequency location within the associated bandwidth part except the RBs for allowed synchronization raster defined in TS 38.104 [13]. Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.	

A.3.11 SMTC Configurations

A.3.11.1 SMTC pattern 1: SMTC period = 20 ms with SMTC duration = 1 ms

Table A.3.11.1-1: SMTC.1: SMTC Pattern 1 for SMTC period = 20 ms and duration = 1 ms

SMTC Parameters	Values
SMTC periodicity	20 ms
SMTC offset	0 ms
SMTC duration	1 ms

A.3.11.2 SMTC pattern 2: SMTC period = 20 ms with SMTC duration = 5 ms

Table A.3.11.2-1: SMTC.2: SMTC Pattern 2 for SMTC period = 20 ms and duration = 5 ms

SMTC Parameters	Values
SMTC periodicity	20 ms
SMTC offset	0 ms
SMTC duration	5 ms

A.3.11.3 SMTC pattern 3: SMTC period = 160 ms with SMTC duration = 1 ms

Table A.3.11.3-1: SMTC.3: SMTC Pattern 3 for SMTC period = 20 ms and duration = 5 ms

SMTC Parameters	Values
SMTC periodicity	160 ms
SMTC offset	0 ms
SMTC duration	1 ms

A.3.11.4 SMTC pattern 4: SMTC period = 20 ms with SMTC duration = 1 ms

Table A.3.11.4-1: SMTC.4: SMTC Pattern 4 for SMTC period = 20 ms and duration = 1 ms

SMTC Parameters	Values
SMTC periodicity	20 ms
SMTC offset	10 ms

SMTC duration	1 ms

A.3.11.5 SMTC pattern 5: SMTC period = 20 ms with SMTC duration = 5 ms

Table A.3.11.5-1: SMTC.5: SMTC Pattern 5 for SMTC period = 20 ms and duration = 5 ms

SMTC Parameters	Values
SMTC periodicity	20 ms
SMTC offset	10 ms
SMTC duration	5 ms

A.3.11.6 SMTC pattern 6: SMTC period = 20 ms with SMTC duration = 5 ms

Table A.3.11.6-1: SMTC.6: SMTC Pattern 6 for SMTC period = 20 ms and duration = 5 ms

SMTC Parameters	Values
SMTC periodicity	20 ms
SMTC offset	17 ms
SMTC duration	5 ms

A.3.11.7 SMTC pattern 7: SMTC period = 20 ms with SMTC duration = 5 ms

Table A.3.11.7-1: SMTC.7: SMTC Pattern 7 for SMTC period = 20 ms and duration = 5 ms

SMTC Parameters	Values
SMTC periodicity	20 ms
SMTC offset	5 ms
SMTC duration	5 ms

A.3.11A SMTC Configurations for RedCap

A.3.11A.1 SMTC pattern 1 for RedCap: SMTC period = 40 ms with SMTC duration = 1 ms

Table A.3.11A.1-1: SMTC.1 RedCap: SMTC Pattern 1 for SMTC period = 40 ms and duration = 1 ms

SMTC Parameters	Values
SMTC periodicity	40 ms
SMTC offset	0 ms
SMTC duration	1 ms

A.3.11A.2 SMTC pattern 2 for RedCap: SMTC period = 80 ms with SMTC duration = 1 ms

Table A.3.11A.2-1: SMTC.2 RedCap: SMTC Pattern 2 for SMTC period = 80 ms and duration = 1 ms

SMTC Parameters	Values
SMTC periodicity	80 ms

SMTC offset	5 ms
SMTC duration	1 ms

A.3.11A.3 SMTC pattern 3 for RedCap: SMTC period = 40 ms with SMTC duration = 1 ms

Table A.3.11A.3-1: SMTC.3 RedCap: SMTC Pattern 3 for SMTC period = 40 ms and duration = 1 ms

SMTC Parameters	Values
SMTC periodicity	40 ms
SMTC offset	20 ms
SMTC duration	1 ms

A.3.11A.4 SMTC pattern 4 for RedCap: SMTC period = 80 ms with SMTC duration = 5 ms

Table A.3.11A.4-1: SMTC.4 RedCap: SMTC Pattern 4 for SMTC period = 80 ms and duration = 5 ms

SMTC Parameters	Values
SMTC periodicity	80 ms
SMTC offset	5 ms
SMTC duration	5 ms

A.3.12 Test Cases with Different CC Configurations

A.3.12.1 EN-DC Test Cases with Different EN-DC Configurations

A.3.12.1.1 Introduction

In Annex A EN-DC test cases may be defined for two component carriers (CCs) as well as for more than two CCs to verify the same RRM requirement.

A.3.12.1.2 Principle of testing

If multiple EN-DC test cases are defined for two CCs as well as for more than two CCs to verify the same type of RRM requirement, which depends on the number of CCs, then from the UE performance point of view the test coverage can be considered fulfilled by executing only the EN-DC test cases with the maximum number of CCs in EN-DC supported by the UE. Otherwise if the same type of RRM requirement is independent of the number of CCs then from the UE performance point of view the test coverage can be considered fulfilled by executing only the EN-DC test cases with two CCs in EN-DC supported by the UE.

Editor's: The maximum number of CCs that can be used in FR2 tests in EN-DC would depend on the test equipment capability.

A.3.12.2 Carrier Aggregation Test Cases with Different CA Configurations

A.3.12.2.1 Introduction

In Annex A carrier aggregation test cases may be defined for two CCs as well as for more than two CCs to verify the same RRM requirement.

A.3.12.2.2 Principle of testing

If multiple carrier aggregation test cases are defined for two CCs as well as for more than two CCs to verify the same RRM requirement, which depends on the number of CCs, then from the UE performance point of view the test coverage can be considered fulfilled by executing only the CA test cases with the maximum number of CCs in CA supported by the UE. Otherwise if the same type of RRM requirement is independent of the number of CCs then from the UE performance point of view the test coverage can be considered fulfilled by executing only the CA test cases with at least two CCs in CA supported by the UE.

Editor's: The maximum number of CCs that can be used in FR2 tests in CA would depend on the test equipment capability.

A.3.13 Test Cases in SA and EN-DC Operations

A.3.13.1 Introduction

This clause defines a principle which is applicable to test cases verifying RRM requirements in standalone (SA) or EN-DC operations.

In Annex A test cases may be defined in SA and EN-DC operations to verify the same RRM requirement.

Editor's note: this clause may need to define further for NE-DC and NR-DC test cases, which subjects to the test cases defined in the future.

A.3.13.2 Principle of Testing

If test cases are defined in both SA and EN-DC operations to verify the same RRM requirement then the UE capable of both SA and EN-DC operations needs to verify that RRM requirement by performing test case(s) in either SA operation or in EN-DC operation.

If test cases are defined in both SA and EN-DC operations to verify at least one common RRM requirement then the UE capable of both SA and EN-DC operations needs to verify RRM requirements by performing test case(s) in either SA operation or in EN-DC operation provided that the performed test case(s):

- verifies the largest number of RRM requirements and
- verifies at least all RRM requirements covered in the test case(s), which is not performed.

A.3.13A Test Cases involving E-UTRA/FR1 and FR2 carriers

A.3.13A.1 Introduction

The following applies to UE compliant to this version of the specification when undergoing tests with a mix of E-UTRA/NR FR1 and NR FR2 carriers in clauses A.5, A.7 and A.8.

A.3.13A.2 Principle of Testing in EN-DC

For test cases in clause A.5 listed in Table A.3.13A.2-1, the following applies:

- UE does not have to pass the test case.

Table A.3.13A.2-1: Test cases UE does not have to pass in current version of specification (EN-DC)

Clause	Test case slogan
A.5.5.2.7	E-UTRAN – NR FR2 interruptions at E-UTRA SRS carrier based switching

A.5.5.3.2	SCell Activation and deactivation of known SCell in FR1 for 160ms SCell measurement cycle
A.5.5.3.5	SCell Activation and deactivation of SCell in FR2
A.5.5.3.6	Multiple SCell Activation and deactivation of one unknown SCell and one known SCell in FR2
A.5.5.6.4.2	E-UTRAN – NR FR1 PSCell SCell dormancy switch of two FR2 SCells outside active time
A.5.7.1.3	EN-DC inter-frequency measurement accuracy with FR1 serving cell and FR2 target cell

A.3.13A.3 Principle of Testing in SA

For test cases in clause A.7 listed in Table A.3.13A.3-1, the following applies:

- UE does not have to pass the test case.

- UE does not have to pass the test case.

Table A.3.13A.3-1: Test cases UE does not have to pass in current version of specification (SA)

Clause	Test case slogan
A.7.5.3.2	SCell Activation and deactivation for FR1+FR2 inter-band with target SCell in FR2
A.7.5.3.7	PUCCH SCell activation and deactivation delay requirements of FR2 unknown cell with FR1 PCell
A.7.5.6.1.2	NR FR1- NR FR2 DL active BWP switch of PCell with non-DRX in SA
A.7.5.6.4.2	NR FR1 PCell SCell dormancy switch of two FR2 SCells outside active time
A.7.6.2.5	SA event triggered reporting tests for FR2 without SSB time index detection when DRX is not used (PCell in FR1)
A.7.6.2.6	SA event triggered reporting tests for FR2 without SSB time index detection when DRX is used (PCell in FR1)
A.7.6.2.7	SA event triggered reporting tests for FR2 with SSB time index detection when DRX is not used (PCell in FR1)
A.7.6.2.8	SA event triggered reporting tests for FR2 with SSB time index detection when DRX is used (PCell in FR1)
A.7.7.1.3	SA inter-frequency measurement accuracy with FR1 serving cell and FR2 target cell

A.3.13A.4 Principle of Testing in E-UTRA

For test cases in clause A.8 listed in Table A.3.13A.4-1, the following applies:

- UE does not have to pass the test case.

Table A.3.13A.4-1: Test cases UE does not have to pass in current version of specification (E-UTRA)

Clause	Test case slogan
A.8.2.2.2	E-UTRA – NR Early Measurement Reporting for NR in FR2
A.8.4.2.5	NR Inter-RAT event triggered reporting tests for FR2 without SSB time index detection when DRX is not used
A.8.4.2.6	NR Inter-RAT event triggered reporting tests for FR2 without SSB time index detection when DRX is used
A.8.4.2.7	NR Inter-RAT event triggered reporting tests for FR2 with SSB time index detection when DRX is not used

A.8.4.2.8	NR Inter-RAT event triggered reporting tests for FR2 with SSB time index detection when DRX is used

A.3.13B Test Cases for EN-DC and NE-DC Operations

A.3.13B.1 Active BWP switch Test Cases for EN-DC and NE-DC Operations

A.3.13B.1.1 Introduction

This clause defines a principle which is applicable to test cases verifying active BWP switch requirements for EN-DC operation and NE-DC operations.

In Annex A test cases are defined for both EN-DC and NE-DC operations to verify the same type of RRM requirement.

A.3.13B.1.2 Principle of Testing

UE capable of both EN-DC and NE-DC operations needs to be tested with one of the tests in either EN-DC or NE-DC operations.

A.3.13B.2 SFTD accuracy Test Cases for EN-DC and NE-DC Operations

A.3.13B.2.1 Introduction

This clause defines a principle which is applicable to test cases verifying SFTD accuracy requirements for EN-DC operation and NE-DC operations.

In Annex A test cases are defined for both EN-DC and NE-DC operations to verify the same type of RRM requirement.

A.3.13B.2.2 Principle of Testing

UE capable of both EN-DC and NE-DC operations needs to be tested with one of the tests in either EN-DC or NE-DC operations.

A.3.14 CSI-RS configurations

A.3.14.1 FDD

Table A.3.14.1-1: CSI-RS Reference Measurement Channels for SCS=15kHz

	CSI-RS.1.1 FDD	CSI-RS.1.2 FDD	CSI-RS.1.3 FDD	CSI-RS.1.4 FDD	CSI-RS.1.5 FDD	CSI-RS.1.6 FDD	CSI-RS.1.7 FDD
Resource Type	**periodic**	**periodic**	**aperiodic**	**aperiodic**	**aperiodic**	**periodic**	**periodic**
Resource Set Config							
nzp-CSI-ResourceSetId	0	0	0	0	0	0	0
repetition	n.a.	off	off	on	off	n.a.	off
aperiodicTriggeringOffset	n.a.	n.a.	0	0	0	n.a.	n.a.
trs-Info	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.
Resource Config							

nzp-CSI-RS-ResourceId	0 for resource #0	0 for resource #0	0 for resource #0	0 for resource #0	0 for resource #0	0 for resource #0	2 for resource #0
				1 for resource #1			
				2 for resource #2			
				3 for resource #3			
		1 for resource #1	1 for resource #1	4 for resource #4	1 for resource #1		3 for resource #1
				5 for resource #5			
				6 for resource #6			
				7 for resource #7			
powerControlOffset	0	0	0	0	0	0	0
powerControlOffsetSS	db0	db0	db0	db0	db0	db0	db0
scramblingID	0	0	0	0	0	0	0
Period (slots)	slot5	slot10	n.a.	n.a.	n.a.	slot40	slot10
Offset	1	1	n.a.	n.a.	n.a.	1	1
qcl-InfoPeriodicCSI-RS	TCI.State.0	TCI.State.0	n.a.	n.a.	n.a.	TCI.State.0	TCI.State.0
		TCI.State.1					TCI.State.1
frequencyDomainAllocation	000001	0001	0001	0001	000001	000001	0100
nrofPorts	2	1	1	1	1	2	1
firstOFDMSymbolInTimeDomain	4 for resource #0	6 for resource #0	6 for resource #0	0 for resource #0	Specified in the test case for resource #0	5 for resource #0	6 for resource #0
				1 for resource #1			
				2 for resource #2			
				3 for resource #3			
		10 for resource #1	10 for resource #1	4 for resource #4	n.a.		10 for resource #1
				5 for resource #5			
				6 for resource #6			
				7 for resource #7			
cdm-Type	FD-CDM2	noCDM	noCDM	noCDM	noCDM	FD-CDM2	noCDM

density	1	3	3	3	3	1	3
startingRB	0	0	0	0	0	0	0
nrofRBs	276 (Note 1)	276 (Note 1)	276 (Note 1)	276 (Note 1)	276 (Note 1)	276 (Note 1)	276 (Note 1)
Note 1: If the configured value of PRBs is larger than the width of the corresponding BWP relevant for the test case, the Test Equipment shall implement CSI-RS only in the width of that BWP.							

A.3.14.2 TDD

Table A.3.14.2-1: CSI-RS Reference Measurement Channels for SCS=15kHz

	CSI-RS.1.1 TDD	**CSI-RS.1.2 TDD**	**CSI-RS.1.3 TDD**	**CSI-RS.1.4 TDD**	**CSI-RS.1.5 TDD**	**CSI-RS.1.6 TDD**
Resource Type	periodic	periodic	aperiodic	aperiodic	periodic	periodic
Resource Set Config						
nzp-CSI-ResourceSetId	0	0	0	0	0	0
repetition	n.a.	off	off	on	n.a.	off
aperiodicTriggeringOffset	n.a.	n.a.	0	0	n.a.	n.a.
trs-Info	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.
Resource Config						
nzp-CSI-RS-ResourceId	0 for resource #0	0 for resource #0 1 for resource #1	0 for resource #0 1 for resource #1	0 for resource #0 1 for resource #1 2 for resource #2 3 for resource #3 4 for resource #4 5 for resource #5 6 for resource #6 7 for resource #7	0 for resource #0	2 for resource #0 3 for resource #1
powerControlOffset	0	0	0	0	0	0
powerControlOffsetSS	db0	db0	db0	db0	db0	db0
scramblingID	0	0	0	0	0	0
Period (slots)	slot5	slot10	n.a.	n.a.	slot40	slot10
Offset	1	1	n.a.	n.a.	1	1
qcl-InfoPeriodicCSI-RS	TCI.State.0	TCI.State.0 TCI.State.1	n.a.	n.a.	TCI.State.0	TCI.State.0 TCI.State.1
frequencyDomainAllocation	000001	0001	0001	0001	000001	0100
nrofPorts	2	1	1	1	2	1
firstOFDMSymbolInTimeDomain	4 for resource #0	6 for resource #0 10 for resource #1	6 for resource #0 10 for resource #1	0 for resource #0 1 for resource #1 2 for resource #2 3 for resource #3 4 for resource #4 5 for resource #5	5 for resource #0	6 for resource #0 10 for resource #1

				6 for resource #6 7 for resource #7		
cdm-Type	FD-CDM2	noCDM	noCDM	noCDM	FD-CDM2	noCDM
density	1	3	3	3	1	3
startingRB	0	0	0	0	0	0
nrofRBs	276 (Note 1)	276 (Note 1)	276 (Note 1)	276 (Note 1)	276 (Note 1)	276 (Note 1)
Note 1: If the configured value of PRBs is larger than the width of the corresponding BWP relevant for the test case, the Test Equipment shall implement CSI-RS only in the width of that BWP.						

Table A.3.14.2-1A: CSI-RS Reference Measurement Channels for SCS=15kHz

	CSI-RS.1.1A TDD	**CSI-RS.1.2A TDD**	**CSI-RS.1.3A TDD**
Resource Type	periodic	aperiodic	periodic
Resource Set Config			
nzp-CSI-ResourceSetId	1	1	1
repetition	off	off	off
aperiodicTriggeringOffset	n.a.	0	n.a.
trs-Info	n.a.	n.a.	n.a.
Resource Config			
nzp-CSI-RS-ResourceId	12 for resource #0	22 for resource #0	14 for resource #0
	13 for resource #1	23 for resource #1	15 for resource #1
powerControlOffset	0	0	0
powerControlOffsetSS	db0	db0	db0
scramblingID	0	0	0
Period (slots)	slot20	n.a.	slot10
Offset	1	n.a.	2
qcl-InfoPeriodicCSI-RS	n.a.	n.a.	n.a.
frequencyDomainAllocation	0001	0001	0001
nrofPorts	1	1	1
firstOFDMSymbolInTimeDomain	6 for resource #0	7 for resource #0	6 for resource #0
	10 for resource #1	11 for resource #1	10 for resource #1
cdm-Type	noCDM	noCDM	noCDM
density	3	3	3
startingRB	0	0	0
nrofRBs	276 (Note 1)	276 (Note 1)	276 (Note 1)
Note 1: If the configured value of PRBs is larger than the width of the corresponding BWP relevant for the test case, the Test Equipment shall implement CSI-RS only in the width of that BWP.			

Table A.3.14.2-2: CSI-RS Reference Measurement Channels for SCS=30kHz

	CSI-RS.2.1 TDD	CSI-RS.2.2 TDD	CSI-RS.2.3 TDD	CSI-RS.2.4 TDD	CSI-RS.2.5 TDD	CSI-RS.2.6 TDD	CSI-RS.2.7 TDD
Resource Type	periodic	periodic	aperiodic	aperiodic	aperiodic	periodic	periodic
Resource Set Config							
nzp-CSI-ResourceSetId	0	0	0	0	0	0	0
repetition	n.a.	off	off	on	off	n.a.	off
aperiodicTriggeringOffset	n.a.	n.a.	0	0	0	n.a.	n.a.
trs-Info	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.
Resource Config							
nzp-CSI-RS-ResourceId	0 for resource #0	0 for resource #0	0 for resource #0	0 for resource #0	0 for resource #0	0 for resource #0	2 for resource #0
				1 for resource #1			
				2 for resource #2			
				3 for resource #3			
		1 for resource #1	1 for resource #1	4 for resource #4	1 for resource #1		3 for resource #1
				5 for resource #5			
				6 for resource #6			
				7 for resource #7			
powerControlOffset	0	0	0	0	0	0	0
powerControlOffsetSS	db0	db0	db0	db0	db0	db0	db0
scramblingID	0	0	0	0	0	0	0
Period (slots)	slot10	slot20	n.a.	n.a.	n.a.	slot80	slot20
Offset	2	2	n.a.	n.a.	n.a.	2	2
qcl-InfoPeriodicCSI-RS	TCI.State.0	TCI.State.0	n.a.	n.a.	n.a.	TCI.State.0	TCI.State.0
		TCI.State.1					TCI.State.1
frequencyDomainAllocation	000001	0001	0001	0001	000001	000001	0100
nrofPorts	2	1	1	1	1	2	1
firstOFDMSymbolInTimeDomain	5 for resource #0	6 for resource #0	6 for resource #0	0 for resource #0	Specified in the test case for resource #0	5 for resource #0	6 for resource #0
				1 for resource #1			
				2 for resource #2			
				3 for resource #3			
		10 for resource #1	10 for resource #1	4 for resource #4	n.a.		10 for resource #1
				5 for resource #5			
				6 for resource #6			
				7 for resource #7			
cdm-Type	FD-CDM2	noCDM	noCDM	noCDM	noCDM	FD-CDM2	noCDM
density	1	3	3	3	3	1	3
startingRB	0	0	0	0	0	0	0
nrofRBs	276 (Note 1)	276 (Note 1)	276 (Note 1)	276 (Note 1)	276 (Note 1)	276 (Note 1)	276 (Note 1)

Note 1: If the configured value of PRBs is larger than the width of the corresponding BWP relevant for the test case, the Test Equipment shall implement CSI-RS only in the width of that BWP.

Table A.3.14.2-2A: CSI-RS Reference Measurement Channels for SCS=30kHz

	CSI-RS.2.1A TDD	CSI-RS.2.2A TDD	CSI-RS.2.3A TDD
Resource Type	periodic	aperiodic	periodic
Resource Set Config			
nzp-CSI-ResourceSetId	1	1	1
repetition	off	off	off
aperiodicTriggeringOffset	n.a.	0	n.a.
trs-Info	n.a.	n.a.	n.a.
Resource Config			
nzp-CSI-RS-ResourceId	12 for resource #0	22 for resource #0	14 for resource #0
	13 for resource #1	23 for resource #1	15 for resource #1
powerControlOffset	0	0	0
powerControlOffsetSS	db0	db0	db0
scramblingID	0	0	0
Period (slots)	slot40	n.a.	slot20
Offset	2	n.a.	4
qcl-InfoPeriodicCSI-RS	n.a.	n.a.	n.a.
frequencyDomainAllocation	0001	0001	0001
nrofPorts	1	1	1
firstOFDMSymbolInTimeDomain	6 for resource #0	7 for resource #0	6 for resource #0
	10 for resource #1	11 for resource #1	10 for resource #1
cdm-Type	noCDM	noCDM	noCDM
density	3	3	3
startingRB	0	0	0
nrofRBs	276 (Note 1)	276 (Note 1)	276 (Note 1)
Note 1: If the configured value of PRBs is larger than the width of the corresponding BWP relevant for the test case, the Test Equipment shall implement CSI-RS only in the width of that BWP.			

Table A.3.14.2-3: CSI-RS Reference Measurement Channels for SCS=120kHz

	CSI-RS.3.1 TDD	CSI-RS.3.2 TDD	CSI-RS.3.3 TDD	CSI-RS.3.4 TDD	CSI-RS.3.5 TDD	CSI-RS.3.6 TDD
Resource Type	**periodic**	**periodic**	**aperiodic**	**aperiodic**	**periodic**	**periodic**
Resource Set Config						
nzp-CSI-ResourceSetId	0	0	0	0	0	0
repetition	n.a.	off	off	on	n.a.	off
aperiodicTriggeringOffset	n.a.	n.a.	4	4	n.a.	n.a.
trs-Info	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.
Resource Config						

nzp-CSI-RS-ResourceId	0 for resource #0	0 for resource #0 1 for resource #1	0 for resource #0 1 for resource #1	0 for resource #0 1 for resource #1 2 for resource #2 3 for resource #3 4 for resource #4 5 for resource #5 6 for resource #6 7 for resource #7	0 for resource #0	2 for resource #0 3 for resource #1
powerControlOffset	0	0	0	0	0	0
powerControlOffsetSS	db0	db0	db0	db0	db0	db0
scramblingID	0	0	0	0	0	0
Period (slots)	slot40	slot80	n.a.	n.a.	slot320	slot80
Offset	8	16	n.a.	n.a.	8	16
qcl-InfoPeriodicCSI-RS	TCI.State.0	TCI.State.0 TCI.State.1	n.a.	n.a.	TCI.State.0	TCI.State.0 TCI.State.1
frequencyDomainAllocation	000001	0001	0001	0001	000001	0100
nrofPorts	2	1	1	1	1	1
firstOFDMSymbolInTimeDomain	5 for resource #0	6 for resource #0 10 for resource #1	6 for resource #0 10 for resource #1	0 for resource #0 1 for resource #1 2 for resource #2 3 for resource #3 4 for resource #4 5 for resource #5 6 for resource #6 7 for resource #7	5 for resource #0	6 for resource #0 10 for resource #1
cdm-Type	FD-CDM2	noCDM	noCDM	noCDM	FD-CDM2	noCDM
density	1	3	3	3	1	3
startingRB	0	0	0	0	0	0
nrofRBs	276 (Note 1)	276 (Note 1)	276 (Note 1)	276 (Note 1)	276 (Note 1)	276 (Note 1)
Note 1: If the configured value of PRBs is larger than the width of the corresponding BWP relevant for the test case, the Test Equipment shall implement CSI-RS only in the width of that BWP.						

Table A.3.14.2-3A: CSI-RS Reference Measurement Channels for SCS=120kHz

	CSI-RS.3.1A TDD	CSI-RS.3.2A TDD	CSI-RS.3.3A TDD
Resource Type	periodic	aperiodic	periodic
Resource Set Config			
nzp-CSI-ResourceSetId	1	1	1
repetition	off	off	off
aperiodicTriggeringOffset	n.a.	6	n.a.
trs-Info	n.a.	n.a.	n.a.
Resource Config			
nzp-CSI-RS-ResourceId	12 for resource #0	22 for resource #0	14 for resource #0

	13 for resource #1	23 for resource #1	15 for resource #1
powerControlOffset	0	0	0
powerControlOffsetSS	db0	db0	db0
scramblingID	0	0	0
Period (slots)	slot160	n.a.	slot80
Offset	8	n.a.	16
qcl-InfoPeriodicCSI-RS	n.a.	n.a.	n.a.
frequencyDomainAllocation	0001	0001	0001
nrofPorts	1	1	1
firstOFDMSymbolInTimeDomain	6 for resource #0	7 for resource #0	6 for resource #0
	10 for resource #1	11 for resource #1	10 for resource #1
cdm-Type	noCDM	noCDM	noCDM
density	3	3	3
startingRB	0	0	0
nrofRBs	276 (Note 1)	276 (Note 1)	276 (Note 1)
Note 1: If the configured value of PRBs is larger than the width of the corresponding BWP relevant for the test case, the Test Equipment shall implement CSI-RS only in the width of that BWP.			

A.3.15 Angle of Arrival (AoA) for FR2 RRM test cases

This clause specifies the AoA setups for FR2 RRM test cases in clause A.5 and A.7. The applicable AoA setup is defined in each test case in clause A.5 and A.7.

A.3.15.1 Setup 1: Single AoA in Rx beam peak direction

There is only one active probe in the test. The DL signals, and noise if applicable, transmitted from the probe, are aligned to the UE Rx beam peak direction (as defined in TS 38.101-2 [19]).

A.3.15.2 Setup 2: Single AoA in non Rx beam peak direction

A.3.15.2.1 Setup 2a: Single AoA in non Rx beam peak direction without change in direction

There is only one active probe in the test. The DL signals, and noise if applicable, transmitted from the probe, align to a direction (AoA) which is from the set of directions corresponding to the EIS spherical coverage percentile of the DUT as defined in clause 7.3.4 of TS 38.101-2 [19] for each UE power class. The direction (AoA) of the signals shall not be changed between test iterations.

A.3.15.2.2 Setup 2b: Single AoA in non Rx beam peak direction with change in direction

There is only one active probe in the test. The DL signals, and noise if applicable, transmitted from the probe, align to a direction (AoA) which is from the set of directions corresponding to the EIS spherical coverage percentile of the DUT as defined in clause 7.3.4 of TS 38.101-2 [19] for each UE power class. For UE power class 3, the direction (AoA) of the signals shall be changed for each test iteration (for UE power classes other than 3, this is FFS).

A.3.15.3 Setup 3: 2 AoAs

There are 2 active probes in the test. The DL signals, and noise if applicable, transmitted from the two active probes, align to directions (AoAs) which are from the set of directions corresponding to the EIS spherical coverage percentile of the DUT as defined in clause 7.3.4 of TS 38.101-2 [19] for each UE power class. The relative angular offset between the directions (AoAs) of the 2 active probes, shall be changed for each test iteration. The applicable set of relative angular offsets between the 2 active probes is given in Table 3.15.3-1 for each UE power class.

Editor Note: If RAN5 finds the changing of angular offset between the directions (AoAs) of the 2 active probes per test iteration to be infeasible from the perspectives of EIS spherical coverage and other impacts, e.g.: testing time, then the test setup will be revised.

Table A.3.15.3-1: Set of relative angular offsets between active probes for each power class

UE Power class	Relative angular offset between active probes
1	FFS
2	FFS
3	30°, 60°, 90°, 120° and 150°
4	FFS
5	FFS
7	FFS

A.3.15.4 Setup 4: 2 AoAs, 1 AoA in Rx beam peak direction, 1 in non Rx beam peak

A.3.15.4.1 Setup 4a: 2 AoAs, 1 AoA in Rx beam peak direction, 1 in non Rx beam peak without change in direction

There are 2 active probes in the test. The DL signals, and noise if applicable, are transmitted from the two active probes. One probe is aligned to the UE Rx beam peak direction as defined in TS 38.101-2 [19]. The second is aligned to a direction (AoA) which is from the set of directions corresponding to the EIS spherical coverage percentile of the DUT as defined in clause 7.3.4 of TS 38.101-2 [19] for each UE power class. The direction (AoA) of the non Rx beam peak signal shall not be changed between test iterations.

A.3.15.4.2 Setup 4b: 2 AoAs, 1 AoA in Rx beam peak direction, 1 in non Rx beam peak with change in direction

There are 2 active probes in the test. The DL signals, and noise if applicable, are transmitted from the two active probes. One probe is aligned to the UE Rx beam peak direction as defined in TS 38.101-2 [19]. The second is aligned to a direction (AoA) which is from the set of directions corresponding to the EIS spherical coverage percentile of the DUT as defined in clause 7.3.4 of TS 38.101-2 [19] for each UE power class.

For UE power class 3, the relative angular offset between the directions (AoAs) of the 2 active probes shall be changed for each test iteration, within the probe alignment described above. The applicable set of relative angular offsets between the 2 active probes is given in Table 3.15.3-1 for each UE power class.

A.3.16 TCI State Configuration

A.3.16.1 Introduction

This clause provides the configurations for TCI states towards either SSB or CSI-RS. The TCI states defined in this clause are configured in each test when applicable to indicate that certain DL signals are QCL'ed with the referenceSignal configured in the TCI states.

A.3.16.2 TCI states

Table A.3.16.2-1: TCI States

Parameter	TCI.State.0	TCI.State.1	TCI.State.2	TCI.State.3
tci-StateId	Id0	Id1	Id2	Id3
qcl-Type1	typeC	typeC	typeA	typeA
qcl-Type2[Note1]	typeD	typeD	typeD	typeD
referenceSignal	SSB0	SSB1	Resource #4 in TRS resource set 1 [Note3]	Resource #4 in TRS resource set 2 [Note3]

Note 1: qcl-Type2 of typeD only where applicable. For RRM test cases, this will be only in FR2
Note 2: referenceSignal configurations towards which the TCI states are configured are defined in a test-specific manner.
Note 3: Reference TRS resource sets are defined in A.3.17, and the applicable TRS resource set(s) are specified in each test case. When a single TRS resource set is configured in a test case, it is considered as resource set 1.

Table A.3.16.2-2: Void

A.3.16A Unified TCI State Configuration

A.3.16A.1 Introduction

This clause provides the configurations for unified TCI states towards either SSB or CSI-RS. The DLorJoint TCI states defined in this clause are configured in each test when applicable to indicate that certain DL (and UL, if joint DL/UL operation is configured) signals are QCL'ed with the referenceSignal configured in the TCI states. The UL TCI states defined in this clause are configured in each test when applicable to indicate that certain UL signals are QCL'ed with the referenceSignal configured in the TCI states.

A.3.16A.2 DLorJoint TCI states

Table A.3.16A.2-1: DLorJoint TCI States

Parameter	DLorJoint TCI.State.0	DLorJoint TCI.State.1	DLorJoint TCI.State.2	DLorJoint TCI.State.3	DLorJoint TCI.State.4	DLorJoint TCI.State.5
tci-StateUnifiedId	Id0	Id1	Id2	Id3	Id4	Id5
qcl-Type1	typeA	typeA	typeA	typeA	typeC	typeC
qcl-Type2[Note1]	typeD	typeD	typeD	typeD	typeD	typeD
referenceSignal [Note2]	Resource #4 in TRS resource set 1 [Note3]	Resource #4 in TRS resource set 2 [Note 5]	Resource #4 in TRS resource set 1 [Note3]	Resource #4 in TRS resource set 2 [Note3]	SSB0	SSB1 from the cell with different PCI
pathlossReferenceRS	N/A	N/A	Resource #4 in TRS resource set 1 [Note3]	Resource #4 in TRS resource set 1 [Note3]	N/A	N/A

additionalPCI	N/A	configured Note4	N/A	N/A	N/A	configured Note4

Note 1: qcl-Type2 of typeD only where applicable. For RRM test cases, this will be only in FR2
Note 2: referenceSignal configurations towards which the TCI states are configured are defined in a test-specific manner.
Note 3: Reference TRS resource sets are defined in A.3.17, and the applicable TRS resource set(s) are specified in each test case. When a single TRS resource set is configured in a test case, it is considered as resource set 1. The TCI state of the TRS is the DLorJoint TCI.State.4.
Note 4: Only one PCI than serving cell PCI is included in the additionalPCIList, and the additionalPCIIndex is configured as 0.
Note 5: Reference TRS resource sets are defined in A.3.17, and the applicable TRS resource set(s) are specified in each test case. When a single TRS resource set is configured in a test case, it is considered as resource set 1. The TCI state of the TRS is the DLorJoint TCI.State.5.

A.3.16A.3 UL TCI states

Table A.3.16A.3-1: UL TCI States

Parameter	UL TCI.State.0	UL TCI.State.1	UL TCI.State.2	UL TCI.State.3
ul-TCIState-Id	Id0	Id1	Id2	Id3
referenceSignal Note1	SSB0	SSB1	Resource #4 in TRS resource set 1 Note2	Resource #4 in TRS resource set 2 Note2
pathlossReferenceRS	Resource #4 in TRS resource set 1 Note2	Resource #4 in TRS resource set 1 Note2	Resource #4 in TRS resource set 1 Note2	Resource #4 in TRS resource set 2 Note2
additionalPCI	N/A	configured Note3	N/A	N/A

Note 1: referenceSignal configurations towards which the UL TCI states are configured are defined in a test-specific manner.
Note 2: Reference TRS resource sets are defined in A.3.17, and the applicable TRS resource set(s) are specified in each test case. When a single TRS resource set is configured in a test case, it is considered as resource set 1.
Note 3: Only one PCI than serving cell PCI is included in the additionalPCIList, and the additionalPCIIndex is configured as 0.

A.3.17 Configurations of CSI-RS for tracking

A.3.17.1 Configuration of CSI-RS for tracking for FR1

A.3.17.1.1 FDD

Table A.3.17.1.1-1: CSI-RS for tracking for SCS=15kHz

Parameter	Unit	Value
Reference channel		TRS.1.1 FDD
Bandwidth		BW of Active BWP Note 1
SCS	kHz	15
First subcarrier index in the PRB used for CSI-RS		k_0=0 for CSI-RS resource 1,2,3,4
First OFDM symbol in the slot used for CSI-RS		l_0 = 5 for CSI-RS resource 1 and 3 l_0 = 9 for CSI-RS resource 2 and 4
Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4
CDM Type		'No CDM' for CSI-RS resource 1,2,3,4
Density (ρ)		3 for CSI-RS resource 1,2,3,4
CSI-RS periodicity	slots	20 for CSI-RS resource 1,2,3,4
CSI-RS offset	slots	10 for CSI-RS resource 1 and 2 11 for CSI-RS resource 3 and 4
EPRE ratio to SSS	dB	0 Note 2
TCI state		TCI.State.0

Note 1: BW of TRS is configured same as the BW size of UE active BWP in the RRM test cases Note 2: Unless otherwise specified in the test case

Table A.3.17.1.1-2: CSI-RS for tracking for SCS=30kHz

Parameter	Unit	Value
Reference channel		TRS.1.2 FDD
Bandwidth		BW of Active BWP[Note 1]
SCS	kHz	30
First subcarrier index in the PRB used for CSI-RS		k_0=0 for CSI-RS resource 1,2,3,4
First OFDM symbol in the slot used for CSI-RS		l_0 = 5 for CSI-RS resource 1 and 3 l_0 = 9 for CSI-RS resource 2 and 4
Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4
CDM Type		'No CDM' for CSI-RS resource 1,2,3,4
Density (ρ)		3 for CSI-RS resource 1,2,3,4
CSI-RS periodicity	slots	40 for CSI-RS resource 1,2,3,4
CSI-RS offset	slots	20 for CSI-RS resource 1 and 2 21 for CSI-RS resource 3 and 4
EPRE ratio to SSS	dB	0[Note 2]
TCI state		TCI.State.0
Note 1: BW of TRS is configured same as the BW size of UE active BWP in the RRM test cases Note 2: Unless otherwise specified in the test case		

Table A.3.17.1.1-3: Aperiodic CSI-RS for tracking for SCS=15kHz

Parameter	Unit	Value
Reference channel		TRS.1.3 FDD
Bandwidth		BW of Active BWP[Note 1]
SCS	kHz	15
First subcarrier index in the PRB used for CSI-RS		k_0=0 for CSI-RS resource 1,2,3,4
First OFDM symbol in the slot used for CSI-RS		l_0 = 5 for CSI-RS resource 1 and 3 l_0 = 9 for CSI-RS resource 2 and 4
Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4
CDM Type		'No CDM' for CSI-RS resource 1,2,3,4
Density (ρ)		3 for CSI-RS resource 1,2,3,4
aperiodicTriggeringOffsetL2	slots	2
Aperiodic CSI-RS offset	slots	2 for CSI-RS resource 1 and 2 3 for CSI-RS resource 3 and 4
EPRE ratio to SSS	dB	0[Note 2]
TCI state		TCI.State.0
Note 1: BW of TRS is configured same as the BW size of UE active BWP in the RRM test cases Note 2: Unless otherwise specified in the test case		

Table A.3.17.1.1-4: Aperiodic CSI-RS for tracking for SCS=30kHz

Parameter	Unit	Value
Reference channel		TRS.1.4 FDD
Bandwidth		BW of Active BWP[Note 1]
SCS	kHz	30
First subcarrier index in the PRB used for CSI-RS		k_0=0 for CSI-RS resource 1,2,3,4
First OFDM symbol in the slot used for CSI-RS		l_0 = 5 for CSI-RS resource 1 and 3 l_0 = 9 for CSI-RS resource 2 and 4

Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4
CDM Type		'No CDM' for CSI-RS resource 1,2,3,4
Density (ρ)		3 for CSI-RS resource 1,2,3,4
aperiodicTriggeringOffsetL2	slots	2
Aperiodic CSI-RS offset	slots	2 for CSI-RS resource 1 and 2 3 for CSI-RS resource 3 and 4
EPRE ratio to SSS	dB	0 Note 2
TCI state		TCI.State.0
Note 1: BW of TRS is configured same as the BW size of UE active BWP in the RRM test cases Note 2: Unless otherwise specified in the test case		

A.3.17.1.2 TDD

Table A.3.17.1.2-1: CSI-RS for tracking for SCS=15kHz

Parameter	Unit	Value
Reference channel		TRS.1.1 TDD
Bandwidth		BW of Active BWP Note 1
SCS	kHz	15
First subcarrier index in the PRB used for CSI-RS		k_0=0 for CSI-RS resource 1,2,3,4
First OFDM symbol in the slot used for CSI-RS		l_0 = 5 for CSI-RS resource 1 and 3 l_0 = 9 for CSI-RS resource 2 and 4
Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4
CDM Type		'No CDM' for CSI-RS resource 1,2,3,4
Density (ρ)		3 for CSI-RS resource 1,2,3,4
CSI-RS periodicity	slots	20 for CSI-RS resource 1,2,3,4
CSI-RS offset	slots	10 for CSI-RS resource 1 and 2 11 for CSI-RS resource 3 and 4
EPRE ratio to SSS	dB	0 Note 2
TCI state		TCI.State.0
Note: BW of TRS is configured same as the BW size of UE active BWP in the RRM test cases		

Table A.3.17.1.2-2: CSI-RS for tracking for SCS=30kHz

Parameter	Unit	Value
Reference channel		TRS.1.2 TDD
Bandwidth		BW of Active BWP Note 1
SCS	kHz	30
First subcarrier index in the PRB used for CSI-RS		k_0=0 for CSI-RS resource 1,2,3,4
First OFDM symbol in the slot used for CSI-RS		l_0 = 5 for CSI-RS resource 1 and 3 l_0 = 9 for CSI-RS resource 2 and 4
Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4
CDM Type		'No CDM' for CSI-RS resource 1,2,3,4
Density (ρ)		3 for CSI-RS resource 1,2,3,4
CSI-RS periodicity	slots	40 for CSI-RS resource 1,2,3,4
CSI-RS offset	slots	20 for CSI-RS resource 1 and 2 21 for CSI-RS resource 3 and 4
EPRE ratio to SSS	dB	0 Note 2
TCI state		TCI.State.0
Note 1: BW of TRS is configured same as the BW size of UE active BWP in the RRM test cases Note 2: Unless otherwise specified in the test case		

Table A.3.17.1.2-3: Aperiodic CSI-RS for tracking for SCS=15kHz

Parameter	Unit	Value

Reference channel		TRS.1.3 TDD
Bandwidth		BW of Active BWP[Note 1]
SCS	kHz	15
First subcarrier index in the PRB used for CSI-RS		k_0=0 for CSI-RS resource 1,2,3,4
First OFDM symbol in the slot used for CSI-RS		l_0 = 5 for CSI-RS resource 1 and 3 l_0 = 9 for CSI-RS resource 2 and 4
Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4
CDM Type		'No CDM' for CSI-RS resource 1,2,3,4
Density (ρ)		3 for CSI-RS resource 1,2,3,4
aperiodicTriggeringOffsetL2	slots	2
Aperiodic CSI-RS offset	slots	2 for CSI-RS resource 1 and 2 3 for CSI-RS resource 3 and 4
EPRE ratio to SSS	dB	0[Note 2]
TCI state		TCI.State.0
Note: BW of TRS is configured same as the BW size of UE active BWP in the RRM test cases		

Table A.3.17.1.2-4: Aperiodic CSI-RS for tracking for SCS=30kHz

Parameter	Unit	Value
Reference channel		TRS.1.4 TDD
Bandwidth		BW of Active BWP[Note 1]
SCS	kHz	30
First subcarrier index in the PRB used for CSI-RS		k_0=0 for CSI-RS resource 1,2,3,4
First OFDM symbol in the slot used for CSI-RS		l_0 = 5 for CSI-RS resource 1 and 3 l_0 = 9 for CSI-RS resource 2 and 4
Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4
CDM Type		'No CDM' for CSI-RS resource 1,2,3,4
Density (ρ)		3 for CSI-RS resource 1,2,3,4
aperiodicTriggeringOffsetL2	slots	2
Aperiodic CSI-RS offset	slots	2 for CSI-RS resource 1 and 2 3 for CSI-RS resource 3 and 4
EPRE ratio to SSS	dB	0[Note 2]
TCI state		TCI.State.0
Note 1: BW of TRS is configured same as the BW size of UE active BWP in the RRM test cases Note 2: Unless otherwise specified in the test case		

A.3.17.2 Configuration of CSI-RS for tracking for FR2

A.3.17.2.1 TDD

Table A.3.17.2.1-1: CSI-RS for tracking for SCS=120kHz Set 1

Parameter	Unit	Value
Reference channel		TRS.2.1 TDD
Bandwidth		BW of Active BWP[Note 1,3]
SCS	kHz	120
First subcarrier index in the PRB used for CSI-RS		k_0=0 for CSI-RS resource 1,2,3,4
First OFDM symbol in the slot used for CSI-RS		l_0 = 1 for CSI-RS resource 1 and 3 l_0 = 5 for CSI-RS resource 2 and 4
Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4
CDM Type		'No CDM' for CSI-RS resource 1,2,3,4
Density (ρ)		3 for CSI-RS resource 1,2,3,4
CSI-RS periodicity	slots	80 for CSI-RS resource 1,2,3,4

CSI-RS offset	slots	40 for CSI-RS resource 1 and 2 41 for CSI-RS resource 3 and 4
EPRE ratio to SSS	dB	0 Note 2
TCI state		TCI.State.0
Note 1: BW of TRS is configured same as the BW size of UE active BWP in the RRM test cases Note 2: Unless otherwise specified in the test case Note 3: If active BWP is larger than 52RBs, BW of TRS is configured as 52RBs. Otherwise, same as active BWP size.		

Table A.3.17.2.1-2: CSI-RS for tracking for SCS=120kHz Set 2

Parameter	Unit	Value
Reference channel		TRS.2.2 TDD
Bandwidth		BW of Active BWP Note 1,3
SCS	kHz	120
First subcarrier index in the PRB used for CSI-RS		k_0=0 for CSI-RS resource 1,2,3,4
First OFDM symbol in the slot used for CSI-RS		l_0 = 2 for CSI-RS resource 1 and 3 l_0 = 6 for CSI-RS resource 2 and 4
Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4
CDM Type		'No CDM' for CSI-RS resource 1,2,3,4
Density (ρ)		3 for CSI-RS resource 1,2,3,4
CSI-RS periodicity	slots	80 for CSI-RS resource 1,2,3,4
CSI-RS offset	slots	40 for CSI-RS resource 1 and 2 41 for CSI-RS resource 3 and 4
EPRE ratio to SSS	dB	0 Note 2
TCI state		TCI.State.1
Note 1: BW of TRS is configured same as the BW size of UE active BWP in the RRM test cases Note 2: Unless otherwise specified in the test case Note 3: If active BWP is larger than 52RBs, BW of TRS is configured as 52RBs. Otherwise, same as active BWP size.		

Table A.3.17.2.1-3: Aperiodic CSI-RS for tracking for SCS=120kHz Set 1

Parameter	Unit	Value
Reference channel		TRS.2.3 TDD
Bandwidth		BW of Active BWP Note 1,3
SCS	kHz	120
First subcarrier index in the PRB used for CSI-RS		k_0=0 for CSI-RS resource 1,2,3,4
First OFDM symbol in the slot used for CSI-RS		l_0 = 1 for CSI-RS resource 1 and 3 l_0 = 5 for CSI-RS resource 2 and 4
Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4
CDM Type		'No CDM' for CSI-RS resource 1,2,3,4
Density (ρ)		3 for CSI-RS resource 1,2,3,4
aperiodicTriggeringOffsetL2	slots	2
Aperiodic CSI-RS offset	slots	2 for CSI-RS resource 1 and 2 3 for CSI-RS resource 3 and 4
EPRE ratio to SSS	dB	0 Note 2
TCI state		TCI.State.0
Note 1: BW of TRS is configured same as the BW size of UE active BWP in the RRM test cases Note 2: Unless otherwise specified in the test case Note 3: If active BWP is larger than 52RBs, BW of TRS is configured as 52RBs. Otherwise, same as active BWP size.		

A.3.18 Additional definitions related to OTA testing for FR2 RRM test cases

A.3.18.1 Introduction

FR2 RRM test cases are performed over the air (OTA). This clause provides additional definitions and clarifications on the OTA measurements and metrics defined or refered in the test cases.

A.3.18.2 PRACH Power Measurement

PRACH power is measured as EIRP(Link=Link angle, Meas=Link angle) as defined in clause 3.1 of TS 38.101-2 [19].

A.3.19 Test applicability for DAPS handover

A.3.19.1 Introduction

In Annex A test cases for DAPS handover may be defined with cells in on same or different carrier frequency to verify intra-frequency, intra-band inter-frequency and inter-band inter-frequency DAPS handover RRM requirements, respectively.

A.3.19.2 Principle of testing

To verify intra-frequency DAPS handover requirements

- The UE capable of intra-frequency asynchronous DAPS handover on any band needs to be tested only in asynchronous scenario.
- The UE not capable of intra-frequency asynchronous DAPS handover on any band but capable of synchronous DAPS handover on some band needs to be tested only in synchronous scenario.

To verify intra-band inter-frequency DAPS handover requirements

- The UE capable of intra-band inter-frequency asynchronous DAPS handover on any band needs to be tested only in asynchronous scenario.
- The UE not capable of intra-band inter-frequency asynchronous DAPS handover on any band but capable of intra-band inter-frequency synchronous DAPS handover on some band needs to be tested only in synchronous scenario.

To verify inter-band inter-frequency DAPS handover requirements

- The UE capable of inter-band inter-frequency asynchronous DAPS handover on any band combination needs to be tested only in asynchronous scenario.
- The UE not capable of inter-band inter-frequency asynchronous DAPS handover on any band combination but capable of inter-band inter-frequency synchronous DAPS handover on some band combination needs to be tested only in synchronous scenario.

A.3.20 MsgA configurations

A.3.20.1 Introduction

This clause provides the typical PRACH and PUSCH configurations for MsgA used for RRM test cases defined in Annex A. To note that for other parameters not listed in this clause, either it can be derived from the set up of each test or it is subjected to RAN5 specifications.

A.3.20.2 MsgA configurations in FR1

A.3.20.2.1 FR1 MsgA configuration 1

FR1 MsgA configuration 1 in this clause provides the typical MsgA configuration for SSB-based contention based random access for 2-step RA type in FR1.

Table A.3.20.2.1-1: Parameters for FR1 MsgA configuration 1

Field	Value	Comment
msgA-prach-ConfigurationIndex	102	10ms PRACH periodicity, and other detailed configuration defined in table 6.3.3.2-2 and table 6.3.3.2-3 in TS 38.211 [6].
msgA-SubcarrierSpacing	Same as UL carrier SCS	
msgA-totalNumberOfRA-Preambles	48	Total number of preambles used for contention based and contention free random access
numberOfRA-PreamblesGroupA	48	No group B.
msgA-PRACH-RootSequenceIndex	0	Logic sequence index = 0, resulting in root sequence = 1.
msgA-SSB-perRACH-OccasionAndCB-PreamblesPerSSB	oneFourth, n48	OneFourth: 1 SSB associated with 4 RACH occasions n48: 48 contention based preambles per SSB
msgA-RO-FDM	One	One PRACH transmission occasions FDMed in one time instance.
ra-ContentionResolutionTimer	sf48	48 sub-frames
msgA-PreamblePowerRampingStep	dB2	
msgA-PreambleReceivedTargetPower	dBm-120	
preambleTransMax	n6	Max number of RA preamble transmission performed before declaring a failure is 6
msgB-ResponseWindow	sl10	10 slots
msgA-ZeroCorrelationZoneConfig	11	N-CS configuration, N_{CS} = 23
Backoff Parameter Index	2	20ms, as defined in table 7.2-1 in TS 38.321 [7].
msgA-MCS	1	MCS index for MsgA PUSCH
nrofSlotsMsgA-PUSCH	1	Number of slots containing one or multiple PUSCH occasions
nrofMsgA-PO-PerSlot	1	Number of time domain PUSCH occasions in each slot
msgA-PUSCH-TimeDomainOffset	1	A single time offset with respect to the start of each PRACH slot, counted as the number of slots
PUSCH start symbol	0	
PUSCH allocation length	14	
mappingTypeMsgA-PUSCH	typeA	
nrofPRBs-PerMsgA-PO	2	Number of RBs per PUSCH occasion
nrofMsgA-PO-FDM	One	The number of MsgA PUSCH occasions FDMed in one time instance
msgA-DMRS-AdditionalPosition	pos1	Position for additional DM-RS
msgA-PUSCH-NrofPorts	1	Configure 1 port per CDM group
msgA-DeltaPreamble	3	Power offset of msgA PUSCH relative to the preamble received target power
msgA-Alpha	alpha1	Alpha value for MsgA PUSCH. Set 1
deltaMCS	Disabled	Whether to apply delta MCS
Note: For further information see clause 6.3.2 in TS 38.331 [2].		

A.3.20.2.2 FR1 MsgA configuration 2

FR1 PRACH configuration 2 in this clause provides the typical MsgA configuration for SSB based non-contention based random access for 2-step RA type in FR1.

Table A.3.20.2.2-1: Parameters for FR1 MsgA configuration 2

Field	Value	Comment
msgA-prach-ConfigurationIndex	102	10ms PRACH periodicity, and other detailed configuration defined in table 6.3.3.2-2 and table 6.3.3.2-3 in TS 38.211 [6].
msgA-SubcarrierSpacing	Same as UL carrier SCS	
msgA-totalNumberOfRA-Preambles	48	Total number of preambles used for contention based and contention free random access
numberOfRA-PreamblesGroupA	48	No group B.
msgA-PRACH-RootSequenceIndex	0	Logic sequence index = 0, resulting in root sequence = 1.
ssb-perRACH-Occasion	oneFourth	OneFourth: 1 SSB associated with 4 RACH occasions
msgA-RO-FDM	One	One PRACH transmission occasions FDMed in one time instance.
msgA-PreamblePowerRampingStep	dB2	
msgA-PreambleReceivedTargetPower	dBm-120	
preambleTransMax	n6	Max number of RA preamble transmission performed before declaring a failure is 6
msgB-ResponseWindow	sl10	10 slots
msgA-ZeroCorrelationZoneConfig	11	N-CS configuration, N_{CS} = 23
Backoff Parameter Index	2	20ms, as defined in table 7.2-1 in TS 38.321 [7].
ssb-ResourceList	ra-PreambleIndex = 50	Associated with SSB index 0. UE doesn't use ssb-ResourceList and BFR-SSB-Resource IEs at the same time. UE doesn't use this field if is transmitting CFRA to convey BFR.
BFR-SSB-Resource	ra-PreambleIndex = 50	Associated with SSB index 0. UE doesn't use ssb-ResourceList and BFR-SSB-Resource IEs at the same time. UE uses this field only if is transmitting CFRA to convey BFR
ra-ssb-OccasionMaskIndex	1	PRACH occasion index 1 is allowed
msgA-MCS	1	MCS index for MsgA PUSCH
nrofSlotsMsgA-PUSCH	1	Number of slots containing one or multiple PUSCH occasions
nrofMsgA-PO-PerSlot	1	Number of time domain PUSCH occasions in each slot
msgA-PUSCH-TimeDomainOffset	1	A single time offset with respect to the start of each PRACH slot, counted as the number of slots
PUSCH start symbol	0	
PUSCH allocation length	14	
mappingTypeMsgA-PUSCH	typeA	
nrofPRBs-PerMsgA-PO	2	Number of RBs per PUSCH occasion
nrofMsgA-PO-FDM	One	The number of MsgA PUSCH occasions FDMed in one time instance
msgA-DMRS-AdditionalPosition	pos1	Position for additional DM-RS
msgA-PUSCH-NrofPorts	1	Configure 1 port per CDM group

msgA-DeltaPreamble	3	Power offset of msgA PUSCH relative to the preamble received target power
msgA-Alpha	alpha1	Alpha value for MsgA PUSCH. Set 1
deltaMCS	Disabled	Whether to apply delta MCS
Note: For further information see clause 6.3.2 in TS 38.331 [2].		

A.3.20.3 MsgA configurations in FR2

A.3.20.3.1 FR2 MsgA configuration 1

FR2 MsgA configuration 1 in this clause provides the typical MsgA configuration for SSB-based contention based random access for 2-step RA type in FR2.

Table A.3.20.3.1-1: Parameters for FR2 MsgA configuration 1

Field	Value	Comment
msgA-prach-ConfigurationIndex	190	Preamble Format C2, with 10ms PRACH periodicity, and other detailed configurations defined in table 6.3.3.2-4 in TS 38.211 [6].
msgA-SubcarrierSpacing	Same as UL carrier SCS	
msgA-totalNumberOfRA-Preambles	48	Total number of preambles used for contention based and contention free random access
numberOfRA-PreamblesGroupA	48	No group B.
msgA-PRACH-RootSequenceIndex	0	Logic sequence index = 0, resulting in root sequence = 1.
msgA-SSB-perRACH-OccasionAndCB-PreamblesPerSSB	oneFourth, n48	OneFourth: 1 SSB associated with 4 RACH occasions n48: 48 contention-based preambles per SSB
msgA-RO-FDM	One	One PRACH transmission occasions FDMed in one time instance.
ra-ContentionResolutionTimer	sf48	48 sub-frames
msgA-PreamblePowerRampingStep	dB2	
msgA-PreambleReceivedTargetPower	dBm-120	
preambleTransMax	n6	Max number of RA preamble transmission performed before declaring a failure is 6
msgB-ResponseWindow	sl10	10 slots
msgA-ZeroCorrelationZoneConfig	11	N-CS configuration, N_{CS} = 23
Backoff Parameter Index	2	20 ms, as defined in table 7.2-1 in TS 38.321 [7].
msgA-MCS	1	MCS index for MsgA PUSCH
nrofSlotsMsgA-PUSCH	1	Number of slots containing one or multiple PUSCH occasions
nrofMsgA-PO-PerSlot	1	Number of time domain PUSCH occasions in each slot
msgA-PUSCH-TimeDomainOffset	1	A single time offset with respect to the start of each PRACH slot, counted as the number of slots
PUSCH start symbol	0	
PUSCH allocation length	10	
mappingTypeMsgA-PUSCH	typeA	
nrofPRBs-PerMsgA-PO	2	Number of RBs per PUSCH occasion
nrofMsgA-PO-FDM	One	The number of MsgA PUSCH occasions FDMed in one time instance
msgA-DMRS-AdditionalPosition	pos1	Position for additional DM-RS
msgA-PUSCH-NrofPorts	1	Configure 1 port per CDM group

msgA-DeltaPreamble	3	Power offset of msgA PUSCH relative to the preamble received target power
msgA-Alpha	alpha1	Alpha value for MsgA PUSCH. Set 1
deltaMCS	Disabled	Whether to apply delta MCS
Note: For further information see clause 6.3.2 in TS 38.331 [2].		

A.3.20.3.2 FR2 MsgA configuration 2

FR2 MsgA configuration 2 in this clause provides the typical MsgA configuration for SSB based non-contention based random access for 2-step RA type in FR2.

Table A.3.20.3.2-1: Parameters for FR2 MsgA configuration 2

Field	Value	Comment
msgA-prach-ConfigurationIndex	190	Preamble Format C2, with 10ms PRACH periodicity, and other detailed configurations defined in table 6.3.3.2-4 in TS 38.211 [6].
msgA-SubcarrierSpacing	Same as UL carrier SCS	
totalNumberOfRA-Preambles	48	Total number of preambles used for contention based and contention free random access
numberOfRA-PreamblesGroupA	48	No group B.
msgA-PRACH-RootSequenceIndex	0	Logic sequence index = 0, resulting in root sequence = 1.
ssb-perRACH-Occasion	oneFourth	OneFourth: 1 SSB associated with 4 RACH occasions
msgA-RO-FDM	One	One PRACH transmission occasions FDMed in one time instance.
msgA-PreamblePowerRampingStep	dB2	
msgA-PreambleReceivedTargetPower	dBm-120	
preambleTransMax	n6	Max number of RA preamble transmission performed before declaring a failure is 6
msgB-ResponseWindow	sl10	10 slots
msgA-ZeroCorrelationZoneConfig	11	N-CS configuration, N_{CS} = 23
Backoff Parameter Index	2	20 ms, as defined in table 7.2-1 in TS 38.321 [7].
ssb-ResourceList	ra-PreambleIndex = 50	Associated with SSB index 0. UE doesn't use ssb-ResourceList and BFR-SSB-Resource IEs at the same time. UE doesn't use this field if is transmitting CFRA to convey BFR.
BFR-SSB-Resource	ra-PreambleIndex = 50	Associated with SSB index 0. UE doesn't use ssb-ResourceList and BFR-SSB-Resource IEs at the same time. UE uses this field only if is transmitting CFRA to convey BFR
ra-ssb-OccasionMaskIndex	1	PRACH occasion index 1 is allowed
msgA-MCS	1	MCS index for MsgA PUSCH
nrofSlotsMsgA-PUSCH	1	Number of slots containing one or multiple PUSCH occasions
nrofMsgA-PO-PerSlot	1	Number of time domain PUSCH occasions in each slot
msgA-PUSCH-TimeDomainOffset	1	A single time offset with respect to the start of each PRACH slot, counted as the number of slots
PUSCH start symbol	0	

PUSCH allocation length	10	
mappingTypeMsgA-PUSCH	typeA	
nrofPRBs-PerMsgA-PO	2	Number of RBs per PUSCH occasion
nrofMsgA-PO-FDM	One	The number of MsgA PUSCH occasions FDMed in one time instance
msgA-DMRS-AdditionalPosition	pos1	Position for additional DM-RS
msgA-PUSCH-NrofPorts	1	Configure 1 port per CDM group
msgA-DeltaPreamble	3	Power offset of msgA PUSCH relative to the preamble received target power
msgA-Alpha	alpha1	Alpha value for MsgA PUSCH. Set 1
deltaMCS	Disabled	Whether to apply delta MCS
Note: For further information see clause 6.3.2 in TS 38.331 [2].		

A.3.20A MsgA configurations under CCA

A.3.20A.1 Introduction

This clause provides the typical PRACH and PUSCH configurations for MsgA used for RRM test cases defined in Annex A. To note that for other parameters not listed in this clause, either it can be derived from the set up of each test or it is subjected to RAN5 specifications.

A.3.20A.2 MsgA configurations in FR1

A.3.20A.2.1 FR1 MsgA configuration 1 under CCA

FR1 MsgA configuration 1 under CCA in this clause provides the typical MsgA configuration for SSB-based contention based random access for 2-step RA type in FR1.

Table A.3.20A.2.1-1: Parameters for FR1 MsgA configuration 1 under CCA

Field	Value	Comment
msgA-prach-ConfigurationIndex	102	10ms PRACH periodicity, and other detailed configuration defined in table 6.3.3.2-2 and table 6.3.3.2-3 in TS 38.211 [6].
msgA-SubcarrierSpacing	Same as UL carrier SCS	
msgA-totalNumberOfRA-Preambles	48	Total number of preambles used for contention based and contention free random access
numberOfRA-PreamblesGroupA	48	No group B.
msgA-PRACH-RootSequenceIndex	0	Logic sequence index = 0, resulting in root sequence = 1.
msgA-SSB-perRACH-OccasionAndCB-PreamblesPerSSB	oneFourth, n48	OneFourth: 1 SSB associated with 4 RACH occasions n48: 48 contention based preambles per SSB
msgA-RO-FDM	One	One PRACH transmission occasions FDMed in one time instance.
ra-ContentionResolutionTimer	sf48	48 sub-frames
msgA-PreamblePowerRampingStep	dB2	
msgA-PreambleReceivedTargetPower	dBm-114	Increased by 6 dB compared with FR1 MsgA configuration 1 for random access test with UL CCA failures.
preambleTransMax	n20	Max number of RA preamble transmission performed before declaring a failure is 20 to account for CCA failures
msgB-ResponseWindow	sl20	20 slots

msgA-ZeroCorrelationZoneConfig	11	N-CS configuration, N_{CS} = 23
Backoff Parameter Index	2	20ms, as defined in table 7.2-1 in TS 38.321 [7].
msgA-MCS	1	MCS index for MsgA PUSCH
nrofSlotsMsgA-PUSCH	1	Number of slots containing one or multiple PUSCH occasions
nrofMsgA-PO-PerSlot	1	Number of time domain PUSCH occasions in each slot
msgA-PUSCH-TimeDomainOffset	1	A single time offset with respect to the start of each PRACH slot, counted as the number of slots
PUSCH start symbol	0	
PUSCH allocation length	14	
mappingTypeMsgA-PUSCH	typeA	
nrofPRBs-PerMsgA-PO	2	Number of RBs per PUSCH occasion
nrofMsgA-PO-FDM	One	The number of MsgA PUSCH occasions FDMed in one time instance
msgA-DMRS-AdditionalPosition	pos1	Position for additional DM-RS
msgA-PUSCH-NrofPorts	1	Configure 1 port per CDM group
msgA-DeltaPreamble	3	Power offset of msgA PUSCH relative to the preamble received target power
msgA-Alpha	alpha1	Alpha value for MsgA PUSCH. Set 1
deltaMCS	Disabled	Whether to apply delta MCS
Note: For further information see clause 6.3.2 in TS 38.331 [2].		

A.3.20A.2.2 FR1 MsgA configuration 2 under CCA

FR1 PRACH configuration 2 under CCA in this clause provides the typical MsgA configuration for SSB based non-contention based random access for 2-step RA type in FR1.

Table A.3.20A.2.2-1: Parameters for FR1 MsgA configuration 2 under CCA

Field	Value	Comment
msgA-prach-ConfigurationIndex	102	10ms PRACH periodicity, and other detailed configuration defined in table 6.3.3.2-2 and table 6.3.3.2-3 in TS 38.211 [6].
msgA-SubcarrierSpacing	Same as UL carrier SCS	
msgA-totalNumberOfRA-Preambles	48	Total number of preambles used for contention based and contention free random access
numberOfRA-PreamblesGroupA	48	No group B.
msgA-PRACH-RootSequenceIndex	0	Logic sequence index = 0, resulting in root sequence = 1.
ssb-perRACH-Occasion	oneFourth	OneFourth: 1 SSB associated with 4 RACH occasions
msgA-RO-FDM	One	One PRACH transmission occasions FDMed in one time instance.
msgA-PreamblePowerRampingStep	dB2	
msgA-PreambleReceivedTargetPower	dBm-114	Increased by 6 dB compared with FR1 MsgA configuration 2 for random access test with UL CCA failures.
preambleTransMax	n20	Max number of RA preamble transmission performed before declaring a failure is 20 to account for CCA failures
msgB-ResponseWindow	sl20	20 slots
msgA-ZeroCorrelationZoneConfig	11	N-CS configuration, N_{CS} = 23
Backoff Parameter Index	2	20ms, as defined in table 7.2-1 in TS 38.321 [7].

ssb-ResourceList	ra-PreambleIndex = 50	Associated with SSB index 0. UE doesn't use ssb-ResourceList and BFR-SSB-Resource IEs at the same time. UE doesn't use this field if is transmitting CFRA to convey BFR.
BFR-SSB-Resource	ra-PreambleIndex = 50	Associated with SSB index 0. UE doesn't use ssb-ResourceList and BFR-SSB-Resource IEs at the same time. UE uses this field only if is transmitting CFRA to convey BFR
ra-ssb-OccasionMaskIndex	1	PRACH occasion index 1 is allowed
msgA-MCS	1	MCS index for MsgA PUSCH
nrofSlotsMsgA-PUSCH	1	Number of slots containing one or multiple PUSCH occasions
nrofMsgA-PO-PerSlot	1	Number of time domain PUSCH occasions in each slot
msgA-PUSCH-TimeDomainOffset	1	A single time offset with respect to the start of each PRACH slot, counted as the number of slots
PUSCH start symbol	0	
PUSCH allocation length	14	
mappingTypeMsgA-PUSCH	typeA	
nrofPRBs-PerMsgA-PO	2	Number of RBs per PUSCH occasion
nrofMsgA-PO-FDM	One	The number of MsgA PUSCH occasions FDMed in one time instance
msgA-DMRS-AdditionalPosition	pos1	Position for additional DM-RS
msgA-PUSCH-NrofPorts	1	Configure 1 port per CDM group
msgA-DeltaPreamble	3	Power offset of msgA PUSCH relative to the preamble received target power
msgA-Alpha	alpha1	Alpha value for MsgA PUSCH. Set 1
deltaMCS	Disabled	Whether to apply delta MCS
Note: For further information see clause 6.3.2 in TS 38.331 [2].		

A.3.21 V2X sidelink communication

A.3.21.1 Introduction

This clause also defines the principle and the reference configurations that are applicable to test cases verifying RRM core requirements for V2X sidelink communication.

A.3.21.2 Reference resource pool configurations for V2X Sidelink Communication

Table A.3.21.2-1: V2X sidelink SL-BWP configuration for NR

Field	Value	Comment
SL-BWP-ConfigCommon-r16		
sl-BWP-Generic-r16		
sl-LengthSymbols-r16	sym14	All 14 symbols in a slot without S-SSB are used for sidelink
sl-StartSymbol-r16	sym0	Symbol #0 is the starting symbol used for sidelink in a slot without S-SSB
sl-BWP-PoolConfigCommon-r16		

sl-RxPool-r16		Indicates the resource pool for reception on the configured BWP. 1 entry
SL-ResourcePool-r16[1]	Set according to Table A.3.21.2-2	Entry 1
sl-TxPoolSelectedNormal-r16		Indicates the resources pool for mode 2 sidelink communication on the configured BWP. 1 entry
SL-ResourcePoolConfig-r16[1]		Entry 1
sl-ResourcePool-r16	Set according to Table A.3.21.2-2	
sl-TxPoolExceptional-r16	Not present	

Table A.3.21.2-2: V2X sidelink resource pool configuration for NR

Field	Value	Comment
SL-ResourcePool-r16		
sl-PSCCH-Config-r16	Set according to Table A.3.21.3-1	
sl-PSSCH-Config-r16	Set according to Table A.3.21.3-2	
sl-PSFCH-Config-r16	Not present	
sl-SyncAllowed-r16		Indicates the allowed synchronization reference(s) which is (are) allowed to use the configured resource pool.
gnss-Sync-r16	true	
gnbEnb-Sync-r16	true	
ue-Sync-r16	true	
sl-SubchannelSize-r16	n10	Subchannel bandwidth is 10 RB
sl-StartRB-Subchannel-r16	0	The offset of lowest RB index of the subchannel with the lowest index in the resource pool with respect to the lowest RB index of a SL BWP
sl-NumSubchannel-r16	1	Number of subchannels in resource pool
sl-UE-SelectedConfigRP-r16		
sl-Thres-RSRP-List-r16	Set according to the specific test configuration	Indicates a list of 64 thresholds, and the threshold should be selected based on the priority in the decoded SCI and the priority in the SCI to be transmitted. A resource is excluded if it is indicated or reserved by a decoded SCI and PSSCH RSRP in the associated data resource is above a threshold.
sl-MultiReserveResource-r16	Not present	
sl-MaxNumPerReserve-r16	n2	At most 2 PSCCH/PSSCH resources can be reserved by a single SCI.
sl-SensingWindow-r16	ms100	Length of resource sensing window specified in TS 38.214 [26] subclause 8.1.4. which is 100ms.
sl-SelectionWindowList-r16		Parameter that determines the end of the selection window for each priority level 8 entries
SL-SelectionWindowConfig-r16[k,k=1..8]		entry k

sl-Priority-r16	k	for priority level = k
sl-SelectionWindow-r16	n20	Length of resource selection window specified in TS 38.214 [26] subclause 8.1.4. which is $20 \cdot 2^{\mu}$slots, where μ=0,1,2,3 refers to SCS 15,30,60,120 kHz respectively
sl-ResourceReservePeriodList-r16	Not present	
sl-RS-ForSensing-r16	pssch	PSSCH-RSRP measurement is used in the sensing operation.
sl-RxParametersNcell	Not present	
sl-ZoneConfigMCR-List-r16	Not present	
sl-PreemptionEnable-r16	enabled	
sl-MinMaxMCS-List-r16		1 entry
SL-MinMaxMCS-Config-r16[1]		Entry 1
sl-MCS-Table-r16	qam64	TS 38.214 [26] Table 5.1.3.1-1 is the MCS table used in the resource pool.
sl-TimeResource-r16	1111111111 1111111111	Every slot in a period of 20 slots during a SFN or DFN cycle can be used for sidelink
SL-TxPercentageList-r16		
SL-TxPercentageConfig-r16		
sl-TxPercentage-r16	p20	Indicates the portion of candidate single-slot PSSCH resources over the toal resources. Value p20 corresponds to 20%, and so on.

Table A.3.21.2-3: V2X sidelink UE autonomous resource selection configuration for NR

Field	Value	Comment
SL-UE-SelectedConfig-r16		
sl-PSSCH-TxConfigList-r16		1 entry
SL-PSSCH-TxConfig-r16[1]		Entry 1
sl-TypeTxSync-r16	Not present	When this filed is absent, the configuration is applicable for all synchronization reference types.
sl-ThresUE-Speed-r16	kmph200	UE shall apply the parameters in sl-ParametersAboveThres-r16 if UE absolute speed is higher than 200 km/h, otherwise UE shall apply the parameters in sl-ParametersBelowThres-r16
sl-ParametersAboveThres-r16		
sl-MinMCS-PSSCH-r16	0	The minimum MCS index value can be used for PSSCH transmission.
sl-MaxMCS-PSSCH-r16	15	The maximum MCS index value can be used for PSSCH transmission.
sl-MinSubChannelNumPSSCH-r16	1	The minimum number of subchannels can be used for PSSCH transmission.
sl-MaxSubchannelNumPSSCH-r16	1	The maximum number of subchannels can be used for PSSCH transmission.
sl-MaxTxTransNumPSSCH-r16	1	The maximum transmission number for PSSCH (including new transmission and retransmission).
sl-MaxTxPower-r16	Not present	Not applicable
sl-ParametersBelowThres-r16		
sl-MinMCS-PSSCH-r16	4	Same as above
sl-MaxMCS-PSSCH-r16	25	Same as above
sl-MinSubChannelNumPSSCH-r16	1	Same as above
sl-MaxSubchannelNumPSSCH-r16	1	Same as above
sl-MaxTxTransNumPSSCH-r16	1	Same as above
sl-MaxTxPower-r16	Not present	Same as above

sl-ProbResourceKeep-r16	v0dot8	The probability of UE keeping current resource is 80% when the resource reselection counter reaches 0 (see TS 38.321 [7]).
sl-ReselectAfter-r16	n1	Resource reselection is triggered after 1 sidelink transmission is skipped (see TS 38.321 [7]).

A.3.21.3 Reference measurement channels for V2X Sidelink Communication

Table A.3.21.3-1: PSCCH Reference Measurement Channels

Parameter		Unit	Value
Reference channel			CC.1A HD
Channel bandwidth		MHz	Note2
Number of PSCCH symbols per slot			2
Number of PSCCH RB			10
Modulation			QPSK
Information Bit Payload (without CRC)		Bits	26
Information Bit	Number of DMRS ports		0 (1 port)
	Priority		As set by higher layers
	Resource reservation period		N/A
	Modulation and coding scheme		Set as the PSSCH MCS specified in the test
	DMRS pattern		0 (2 DMRS)
	2nd stage SCI format		00 (SCI format 2-A)
	Beta offset indicator		Set as specified in the test
	Frequency resource assignment		Set as per PSSCH RB allocation specific in the test
	Time resource assignment		Set as per PSSCH slot allocation specific in the test
	Reserved bits		Set all these bits to 0
Transport block CRC		Bits	24
Binary Channel Bits (see Note 1)		Bits	360
Note 1: Binary channel bits calculated under assumption of 2 CP-OFDM symbols per subframe. Note 2: Channel bandwidth depends on test configuration.			

Table A.3.21.3-2: PSSCH Reference Measurement Channels

Parameter	Unit	Value
Reference channel		CD.1A HD
Sidelink transmission mode		2
Channel bandwidth	MHz	Note1
Allocated PSSCH resource blocks		10
Number of PSSCH symbols per slot		10
Modulation		QPSK
Target Code Rate		1/3
Information Bit Payload (Transport block size)	Bits	672
Transport block CRC	Bits	24
Number of PSSCH HARQ retransmissions		0
Binary Channel Bits	Bits	2160
Note 1: Channel bandwidth depends on test configuration. Note 2: 2nd state SCI and PSFCH are not allocated per slot.		

A.3.21.4 Reference SL-DRX configurations

A.3.21.4.1 SL-DRX Configuration 1: SL-DRX cycle = 40 ms

Table A.3.21.4.1-1: SL-DRX.1: SL-DRX cycle = 40 ms

Field	Value
sl-DRX-GC-BC-OnDurationTimer	2 ms
sl-DRX-GC-InactivityTimer	2 ms
sl-DRX-GC-RetransmissionTimer	16 slot
sl-DRX-GC-BC-CyclelongDRX	40 ms
Note: This SL-DRX configuration is applicable for V2X sidelink communication. For further information see clause 6.3.5 in TS 38.331.	

A.3.21.4.2 SL-DRX Configuration 2: SL-DRX cycle = 320 ms

Table A.3.21.4.2-1: SL-DRX.2: SL-DRX cycle = 320 ms

Field	Value
sl-DRX-GC-BC-OnDurationTimer	2 ms
sl-DRX-GC-InactivityTimer	2 ms
sl-DRX-GC-RetransmissionTimer	16 slot
sl-DRX-GC-BC-CyclelongDRX	320 ms
Note: This SL-DRX configuration is applicable for V2X sidelink communication. For further information see clause 6.3.5 in TS 38.331.	

A.3.21.4.3 SL-DRX Configuration 3: SL-DRX cycle = 640 ms

Table A.3.21.4.3-1: SL-DRX.3: SL-DRX cycle = 640 ms

Field	Value
sl-DRX-GC-BC-OnDurationTimer	2 ms
sl-DRX-GC-InactivityTimer	2 ms
sl-DRX-GC-RetransmissionTimer	16 slot
sl-DRX-GC-BC-CyclelongDRX	640 ms
Note: This SL-DRX configuration is applicable for V2X sidelink communication. For further information see clause 6.3.5 in TS 38.331.	

A.3.22 CSI-IM configurations

A.3.22.1 FDD

Table A.3.22.1-1: CSI-IM Reference Measurement Channels for SCS=15kHz

	CSI-IM.1.1 FDD	CSI-IM.1.2 FDD	CSI-IM.1.3 FDD
Resource Type	periodic	aperiodic	periodic
Resource Set Config			
csi-IM-ResourceSetId	0	0	0
Resource Config			

csi-IM-ResourceId	0 for resource #0	10 for resource #0	2 for resource #0
	1 for resource #1	11 for resource #1	3 for resource #1
csi-IM-ResourceElementPattern	pattern1	pattern1	pattern1
subcarrierLocation-p1	s0	s0	s0
symbolLocation-p1	6 for resource #0	7 for resource #0	6 for resource #0
	10 for resource #1	11 for resource #1	10 for resource #1
Period (slots)	slot20	n.a.	slot10
Offset	1	n.a.	2
startingRB	0	0	0
nrofRBs	276 (Note 1)	276 (Note 1)	276 (Note 1)
Note 1: If the configured value of PRBs is larger than the width of the corresponding BWP relevant for the test case, the test Equipment shall implement CSI-RS only in the width of that BWP.			

A.3.22.2 TDD

Table A.3.22.2-1: CSI-IM Reference Measurement Channels for SCS=15kHz

	CSI-IM.1.1 TDD	**CSI-IM.1.2 TDD**	**CSI-IM.1.3 TDD**
Resource Type	periodic	aperiodic	periodic
Resource Set Config			
csi-IM-ResourceSetId	0	0	0
Resource Config			
csi-IM-ResourceId	0 for resource #0	10 for resource #0	2 for resource #0
	1 for resource #1	11 for resource #1	3 for resource #1
csi-IM-ResourceElementPattern	pattern1	pattern1	pattern1
subcarrierLocation-p1	s0	s0	s0
symbolLocation-p1	6 for resource #0	7 for resource #0	6 for resource #0
	10 for resource #1	11 for resource #1	10 for resource #1
Period (slots)	slot20	n.a.	slot10
Offset	1	n.a.	2
startingRB	0	0	0
nrofRBs	276 (Note 1)	276 (Note 1)	276 (Note 1)
Note 1: If the configured value of PRBs is larger than the width of the corresponding BWP relevant for the test case, the test Equipment shall implement CSI-RS only in the width of that BWP.			

Table A.3.22.2-2: CSI-IM Reference Measurement Channels for SCS=30kHz

	CSI-IM.2.1 TDD	**CSI-IM.2.2 TDD**	**CSI-IM.2.3 TDD**
Resource Type	periodic	aperiodic	periodic
Resource Set Config			
csi-IM-ResourceSetId	0	0	0
Resource Config			

csi-IM-ResourceId	0 for resource #0	10 for resource #0	2 for resource #0
	1 for resource #1	11 for resource #1	3 for resource #1
csi-IM-ResourceElementPattern	pattern1	pattern1	pattern1
subcarrierLocation-p1	s0	s0	s0
symbolLocation-p1	6 for resource #0	7 for resource #0	6 for resource #0
	10 for resource #1	11 for resource #1	10 for resource #1
Period (slots)	slot40	n.a.	slot40
Offset	2	n.a.	4
startingRB	0	0	0
nrofRBs	276 (Note 1)	276 (Note 1)	276 (Note 1)
Note 1: If the configured value of PRBs is larger than the width of the corresponding BWP relevant for the test case, the test Equipment shall implement CSI-RS only in the width of that BWP.			

Table A.3.22.2-3: CSI-RS Reference Measurement Channels for SCS=120kHz

	CSI-IM.3.1 TDD	**CSI-IM.3.2 TDD**	**CSI-IM.3.3 TDD**
Resource Type	periodic	aperiodic	periodic
Resource Set Config			
csi-IM-ResourceSetId	0	0	0
Resource Config			
csi-IM-ResourceId	0 for resource #0	10 for resource #0	2 for resource #0
	1 for resource #1	11 for resource #1	3 for resource #1
csi-IM-ResourceElementPattern	pattern1	pattern1	pattern1
subcarrierLocation-p1	s0	s0	s0
symbolLocation-p1	6 for resource #0	7 for resource #0	6 for resource #0
	10 for resource #1	11 for resource #1	10 for resource #1
Period (slots)	slot160	n.a.	slot80
Offset	8	n.a.	16
startingRB	0	0	0
nrofRBs	276 (Note 1)	276 (Note 1)	276 (Note 1)
Note 1: If the configured value of PRBs is larger than the width of the corresponding BWP relevant for the test case, the test Equipment shall implement CSI-RS only in the width of that BWP.			

A.3.23 Spatial Relation Configuration

A.3.23.1 Introduction

This clause provides the configurations for spatial relation towards either SSB or CSI-RS. The spatial relation defined in this clause are configured in each test when applicable to indicate spatial setting for certain UL signals with the referenceSignal configured in the spatial relation.

A.3.23.2 Spatial Relation

Table A.3.23.2-1: PUCCH Spatial Relation

Parameter	PUCCH.SRI.0	PUCCH.SRI.1
pucch-SpatialRelationInfoId	Id0	Id1
referenceSignal	SSB0	SSB1
PUCCH-PathlossReferenceRS	SSB0	SSB1
Note 1: referenceSignal configurations towards which the spatial relation are configured in a test-specific manner.		

Table A.3.23.2-2: SRS Spatial Relation

Parameter	SRS.SRI0	SRS.SRI1
srs-SpatialRelationInfoId	Id0	Id1
referenceSignal	SSB0	SSB1
Note 1: referenceSignal configurations towards which the spatial relation are configured in a test-specific manner.		

A.3.24 SRS configuration

Table A.3.24-1: Sounding Reference Symbol Configuration for SCS=15kHz

	SRS.1 TDD	PDC-SRS.1	POS-SRS.1	
Field	**Value**			**Comment**
c-SRS	12	Same as $N_{RB,c}$ in the test case	Same as $N_{RB,c}$ in the test case	
b-SRS	0	0	n.a.	
b-hop	0	0	n.a.	Frequency hopping is disabled
groupOrSequenceHopping	neither	neither	neither	No group or sequence hopping
freqDomainPosition	0	0	0	Frequency domain position of SRS
freqDomainShift	0	0	0	
pathlossReferenceRS ssb-Index	0	0	0	SSB #0 is used for SRS path loss estimation
usage	antennaSwitching	usagePDC-r17	n.a.	
startPosition Note 1	1	5	5	resourceMapping setting
nrofSymbols Note 1	1	4	4	
repetitionFactor	n1	n.a.	n.a.	without repetition.
transmissionComb	n2	n4	n4	
combOffset-n2	0	0	0	transmissionComb setting
cyclicShift-n2	0	0	0	
nrofSRS-Ports Note 1	port1	port1	port1	Number of antenna ports used for SRS transmission

resourceType	Periodic	Periodic	Periodic	
periodicityAndOffset-p Note 1	sl40, 1	sl160, 20	sl160, 20	SRS transmission periodicity
Note 1: For test cases in A.4.5.2.11, A.4.5.2.12, A.6.5.2.3, A.6.5.2.4, the startPosition, nrofSymbols, nrofSRS-Ports, periodicityAndOffset-p are specified in each test cases.				

Table A.3.24-2: Sounding Reference Symbol Configuration for SCS=30kHz

	SRS.2 TDD	PDC-SRS.2	POS-SRS.2	
Field	**Value**			**Comment**
c-SRS	24	Same as NRB,c in the test case	Same as NRB,c in the test case	
b-SRS	0	0	n.a.	
b-hop	0	0	n.a.	Frequency hopping is disabled
groupOrSequenceHopping	neither	neither	neither	No group or sequence hopping
freqDomainPosition	0	0	0	Frequency domain position of SRS
freqDomainShift	0	0	0	
pathlossReferenceRS ssb-Index	0	0	0	SSB #0 is used for SRS path loss estimation
usage	antennaSwitching	usagePDC-r17	n.a.	
startPosition Note 1	3	5	5	resourceMapping setting
nrofSymbols Note 1	1	4	4	SRS symbols belong to the same SRS resource.
repetitionFactor	n1	n.a.	n.a.	without repetition.
transmissionComb	n2	n4	n4	
combOffset-n2	0	0	0	transmissionComb setting
cyclicShift-n2	0	0	0	
nrofSRS-Ports Note 1	port1	port1	port1	Number of antenna ports used for SRS resource transmission
resourceType	Periodic	Periodic	Periodic	
periodicityAndOffset-p Note 1	sl80, 3	Sl320, 40	Sl320, 40	SRS transmission periodicity
Note 1: For test cases in A.4.5.2.11, A.4.5.2.12, A.6.5.2.3, A.6.5.2.4, the startPosition, nrofSymbols, nrofSRS-Ports, periodicityAndOffset-p are specified in each test cases.				

Table A.3.24-3: Sounding Reference Symbol Configuration for SCS=120kHz

	SRS.3 TDD	PDC-SRS.3	POS-SRS.3	
Field	**Value**			**Comment**
c-SRS	17	Same as NRB,c in the test case	Same as NRB,c in the test case	
b-SRS	0	0	n.a.	
b-hop	0	0	n.a.	Frequency hopping is disabled
groupOrSequenceHopping	neither	neither	neither	No group or sequence hopping

freqDomainPosition	0	0	0	Frequency domain position of SRS
freqDomainShift	0	0	0	
pathlossReferenceRS ssb-Index	0	0	0	SSB #0 is used for SRS path loss estimation
usage	antennaSwitching	usagePDC-r17	n.a.	
startPosition	1	5	5	resourceMapping setting
nrofSymbols	1	4	4	SRS symbols belong to the same SRS resource.
repetitionFactor	n1	n1	n.a.	without repetition.
transmissionComb	n2	n4	n4	
combOffset-n2	0	0	0	transmissionComb setting
cyclicShift-n2	0	0	0	
nrofSRS-Ports	port1	port1	port1	Number of antenna ports used for SRS resource transmission
resourceType	Periodic	Periodic	Periodic	
periodicityAndOffset-p	sl320, 3	Sl1280, 160	Sl1280, 160	SRS transmission periodicity

A.3.25 Channel bandwidth (CBW) configurations

A.3.25.1 DL UE specific CBW

Table A.3.25.1-1: DL CBW patterns for UE specific CBW configuration

BWP Parameters	Unit	Values	
Reference CBW		DLCBW.1.1	DLCBW.1.2
OffsetToCarrier	RB	0	RB_x Note 1
carrierBandwidth	RB	Same as RF channel defined in each test	Same as RF channel defined in each test
Note 1: RB_x is offset in frequency domain between Point A (lowest subcarrier of common RB 0) and the lowest usable subcarrier on this carrier. Note that RB_x has to be within the CBW of BS.			

A.3.25.2 UL UE specific CBW

Table A.3.25.2-1: UL CBW patterns for UE specific CBW configuration

BWP Parameters	Unit	Values	
Reference CBW		ULCBW.1.1	ULCBW.1.2
OffsetToCarrier	RB	0	RB_x Note 1
carrierBandwidth	RB	Same as RF channel defined in each test	Same as RF channel defined in each test
Note 1: RB_x is offset in frequency domain between Point A (lowest subcarrier of common RB 0) and the lowest usable subcarrier on this carrier. Note that RB_x has to be within the CBW of BS.			

A.3.26 CCA model

A.3.26.1 Introduction

The CCA model is used in some RRM test cases with at least one cell on a carrier frequency with CCA. The intention with the CCA model is to emulate in the test equipment the behaviour of a gNB or UE which performs

channel measurement to check that the channel is clear prior to performing one or more downlink or uplink transmissions.

A.3.26.2 CCA model for operation on a carrier frequency with CCA in FR1

A.3.26.2.1 DL CCA model

The same DL CCA model is applicable regardless of whether DRX cycle is used or not with the following differences:

- The counter, $l_{CCA,}$ is used to monitor the number of unavailable DBT samples withing an evaluation window, $W_{CCA_DL.}$ DBT samples outside of the evaluation window W_{CCA_DL} are discarded.
- If DRX cycle is not used then prior to each DBT window, the test equipment shall determine whether the DL CCA attempt is successful (i.e., the corresponding signals have to be transmitted), based on probability P_{CCA_DL} of successful DL CCA configured in the corresponding test case. If DRX cycle is not used, then the DL CCA model shall increment the counter l_{CCA} for every unavailable DBT sample due to DL CCA failure.
- If DRX cycle is used, then the DL CCA model shall increment the counter, l_{CCA}, once per DRX cycle for a DRX cycle if the first DBT sample in that DRX cycle is unavailable due to DL CCA failure. DL CCA failures in a DRX cycle are determined as follows:
- The test system *in the first DBT window of each DRX cycle* determines whether the DL CCA attempt is successful or not using the principle as follows:
  - If the DL CCA is successful then the test system shall transmit in all DBT windows within that DRX cycle.
  - If the DL CCA is not successful then the test system shall not transmit in any of the DBT windows within that DRX cycle. In this case l_{CCA} is increased by 1.
- The parameters, L_{CCA_DL}, L_{CCA_UL}, W_{CCA_DL} and W_{CCA_UL} can be used as in non-DRX tests.

If the CCA attempt is successful for a transmission, then the test equipment shall transmit also other remaining transmissions, according to the configuration, within the same DBT window.

If the CCA attempt is not successful for a transmission within the DBT window, the test equipment shall determine whether the CCA attempt is successful for the next configured transmission, based on probability P_{CCA_DL}.

The probability can be different in different time intervals T_i during a test case. One probability value (per cell) applies at any time point during a test; one or more probability values can be configured in the entire test, one value P_{CCA_DL} per time interval T_i where $i \geq 1$, and the multiple time intervals (when $i>1$) do not overlap (e.g., $P_{CCA_DL}=1.0$ in T_1 and $P_{CCA_DL}=0.75$ in T_2)..

For semi-static channel access configuration, a single value P_{CCA_DL} is used to configure the probability of CCA success in different time intervals T_i during a test realization. An additional limit L_{CCA_DL} is used to determine the maximum number of unavailable DBT samples within an evaluation window W_{CCA_DL}. If the number of unavailable DBT samples on the last W_{CCA_DL} DBT samples is larger or equal to L_{CCA_DL}, the CCA attempt is considered successful for transmission.

For dynamic channel access configuration, the parameters $P_{CCA_DL_1}$ and $P_{CCA_DL_2}$ are used to configure the probability of CCA success on the first and second SSB candidate positions, respectively, in different time intervals T_i during a test realization. An additional limit L_{CCA_DL} is used to determine the maximum number of unavailable DBT samples within an evaluation window W_{CCA_DL}. If the number of unavailable DBT samples on the last W_{CCA_DL} DBT samples is larger or equal to L_{CCA_DL}, the CCA attempt is considered successful for transmission.

For semi-static channel access configuration or for dynamic channel access configuration where one candidate SSB position is modeled, prior to each discovery burst transmission window within a time interval Ti of the test, the test equipment shall:

1 - Generate a uniform random variable *p1* from the range [0, 1] for the first candidate position.

2 - Transmit the discovery burst based on *p1* in the first candidate position. If $p1 \leq P_{CCA_DL}$, the discovery burst is transmitted at the first candidate SSB location; else if l_{CCA} is larger than or equal to $L_{CCA_DL,}$ the discovery burst is transmitted at the first candidate SSB location, otherwise the discovery burst is muted. If DRX cycle is used, then the decision whether the discover burst is muted or not is repeated for the rest of the DRX cycle.

For dynamic channel access configuration where two candidate SSB positions are modelled, prior to each discovery burst transmission window within a time interval T_i of the test, the test equipment shall:

1 - Generate a uniform random variable *p1* from the range [0, 1] for the first candidate position.

2 - Transmit the discovery burst based on *p1* in the first candidate position: if $p1 \leq P_{CCA_DL1}$, the discovery burst is transmitted at first candidate SSB location, else the test equipment shall:

a - Generate a uniform random variable *p2* from the range [0, 1] for the second candidate SSB position.

b - Transmit the discovery burst based on *p2* in the second candidate position. If $p2 \leq P_{CCA_DL2}$, the discovery burst is transmitted at the second candidate SSB location; else if l_{CCA} is larger than or equal to L_{CCA_DL}, the discovery burst is transmitted at the second candidate SSB location, otherwise the discovery burst is muted. If DRX cycle is used, then the decision whether the discover burst is muted or not is repeated for the rest of the DRX cycle

The above steps are repeated for each discovery burst transmission window in each time interval T_i of the test. The limit L_{CCA_DL} and window W_{CCA_DL} is a configuration parameter for each test case.

In many test cases, the requirement under a test depends on the number of configured SSB transmissions which are not available during the test due to CCA failure, so the test equipment shall track how many such signal occasions are not transmitted in DL during the test period.

A.3.26.2.2 UL CCA model

For UL CCA, the modelling approach is based on probability P_{CCA_UL} of successful CCA. Probability P_{CCA_UL} is configured in the corresponding test case, based on a set S_{CCA_UL} of possible values including 75 % and 87% as typical values for dynamic and semi-static channel access configurations, 0% to model consistent UL CCA failures, and 100% to model no UL CCA failures.

Consistent UL CCA failures are modelled by configuring a low value for P_{CCA_UL}, e.g., P_{CCA_UL} = 0%.

In the same time interval T_i during the same test case, P_{CCA_UL} can be different from P_{CCA_DL}.

The probability can be different in different time intervals T_i during a test case. One probability value applies at any time point during a test; one or more probability values can be configured in the entire test, one value P_{CCA_UL} per time interval T_i where $I \geq 1$, and the multiple time intervals (when $I > 1$) do not overlap (e.g., P_{CCA_UL} = 1.0 in T_1 and P_{CCA_UL} = 0.75 in T_2).

T_{CCA} µs prior to each UL transmission burst in the test, the test equipment (TE) shall generate a uniform random variable p from the range [0, 1]. If $p>P_{CCA_UL}$, the TE transmits an OCNG noise pattern with an energy level X within the UE BW scheduled/configured for the UL transmission for at-least T_{CCA} µs. Where T_{CCA} µs is energy detection time for accessing the uplink channel as defined in section 5.1.1 of TS 37.106 [36]. Where:

- X is 3 dB above the energy detection threshold defined in section 5.1.1 of TS 37.106 [36].
- T_{CCA} is the channel sensing period depending on CCA category for the next UL transmission.

The TE shall count the number of UL CCA failures, and no further UL CCA failures are modeled if the number of failures exceeds the limit L_{CCA_UL} within a window W_{CCA_UL}. For each UL CCA failure generated by the model, the

TE shall monitor the corresponding UL resource for the desired UL signal, and based on when and/or whether the TE received the desired UL signal, it deems the test case to pass or fail.

In many cases, the requirement under a test depends on the number of configured signal occasions which are not available during the test, so the test equipment shall track how many such signal occasions are not transmitted in UL during the test period.

A.3.26.3 CCA model for operation on a carrier frequency with CCA in FR2-2

A.3.26.3.1 DL CCA model

For DL CCA, the modelling approach is based on probability P_{CCA_DL} of successful CCA.

If the CCA attempt is successful for a transmission, then the test equipment shall transmit also other remaining transmissions, according to the configuration, within the same DBT window.

If the CCA attempt is not successful for a transmission within the DBT window, the test equipment shall determine whether the CCA attempt is successful for the next configured transmission, based on probability P_{CCA_DL}.

To decide whether the CCA attempt for one SSB/SMTC occasion within one SSB/SMTC occasion group, where one SSB/SMTC occasion group consists of 12 consecutive SSB/SMTC occasions is successful or not, TE shall:

1 - Generate a uniform random variable *p* from the range [0, 1].

2 - If $p > P_{CCA_DL}$,

- TE picks one SSB/SMTC occasion out of a group of 12 consecutive SSB/SMTC occasions based on a fixed pattern, where one SSB/SMTC occasion is equivalent to one SSB burst Set.
- TE models CCA failure in this SSB/SMTC occasion. Note that other 11 SSB/SMTC occasions shall be transmitted by the TE.
- Whole SSB/SMTC occasion group is considered as unavailable to the UE.

2 - If $p \leq P_{CCA_DL}$,

- TE transmit 12 consecutive SSB/SMTC occasions.
- Whole SSB/SMTC occasion group is considered as available to the UE.

In many test cases, the requirement under a test depends on the number of configured SSB transmissions which are not available during the test due to CCA failure, so the test equipment shall track how many such signal occasions are not transmitted in DL during the test period.

A.3.26.3.2 UL CCA model

For UL CCA, the modelling approach is based on probability P_{CCA_UL} of successful CCA. Probability P_{CCA_UL} is configured in the corresponding test case.

Consistent UL CCA failures are modelled by configuring a low value for P_{CCA_UL}, e.g., $P_{CCA_UL} = 0\%$.

In the same time interval T_i during the same test case, P_{CCA_UL} can be different from P_{CCA_DL}.

The probability can be different in different time intervals T_i during a test case. One probability value applies at any time point during a test; one or more probability values can be configured in the entire test, one value P_{CCA_UL} per

time interval T_i where $I \geq 1$, and the multiple time intervals (when $I > 1$) do not overlap (e.g., $P_{CCA_UL} = 1.0$ in T_1 and $P_{CCA_UL} = 0.75$ in T_2).

T_{CCA} µs prior to each UL transmission burst in the test, the test equipment (TE) shall generate a uniform random variable p from the range [0, 1]. If $p > P_{CCA_UL}$, the TE transmits an OCNG noise pattern with an energy level X within the UE BW scheduled/configured for the UL transmission for at-least T_{CCA} µs. Where T_{CCA} µs is energy detection time for accessing the uplink channel as defined in section 5.1.1 of TS 37.106 [36]. Where:

- X is 3 dB above the energy detection threshold defined in section 5.1.1 of TS 37.106 [36].
- T_{CCA} is the channel sensing period depending on CCA category for the next UL transmission.

In many cases, the requirement under a test depends on the number of configured signal occasions which are not available during the test, so the test equipment shall track how many such signal occasions are not transmitted in UL during the test period.

A.3.27 Test Cases with at Least One Cell on a Carrier Frequency with CCA

Editor's note: This clause will include applicability rules for the corresponding test cases.

A.3.27.1 Introduction

A.3.27.2 NR Standalone Tests with NR SCell under CCA and All Other NR Cells in FR1

Editor's note: This clause will include applicability rules for the corresponding test cases.

A.3.27.3 EN-DC Tests with NR PSCell under CCA and Other NR Cells in FR1

Editor's note: This clause will include applicability rules for the corresponding test cases.

A.3.27.4 NR Standalone Tests with NR PCell under CCA and Other NR Cells in FR1

Editor's note: This clause will include applicability rules for the corresponding test cases.

A.3.27.5 E-UTRA Standalone Tests with at Least One NR Cell under CCA

Editor's note: This clause will include applicability rules for the corresponding test cases.

A.3.28 Discovery Burst Transmission Window configuration under CCA

A.3.28.1 DBT Window pattern 1: DBT Window period = 20 ms with DBT Window duration = 1 ms

Table A.3.28.1-1: DBT.1: DBT Window Pattern 1 for DBT Window period = 20 ms and duration = 1 ms

SMTC Parameters	Values
Discovery burst transmission window periodicity	20 ms
Discovery burst transmission window offset	0 ms
Discovery burst transmission window duration	1 ms

A.3.29 Testing principles for UE capable of only NR bands with shared spectrum access

A.3.29.1 Introduction

In annex A test cases are defined involving one or more NR cells operating on NR band(s) with shared spectrum channel access. The NR bands with shared spectrum channel access are defined in clause 5.2 of TS 38-101-1 [18].

A.3.29.2 Principle of testing for UE capable of EN-DC with only NR bands with shared spectrum access

In Annex A, test cases in table A.3.29.2-1 are defined for UE capable of EN-DC with only NR band(s) with shared spectrum access and are not required for UE supporting also other NR band(s) (i.e. band with no shared spectrum access). The EN-DC configurations are defined in clause of 5.5B of TS 38.101-3 [20].

Table A.3.29.2-1: Test cases applicable to UE supporting EN-DC with only NR bands with shared spectrum access

Test category	Section	Test case
Active BWP switching	A.10.3.5.2.1	E-UTRAN – NR PSCell FR1 DL active BWP switch in non-DRX in synchronous EN-DC
	A.10.3.5.2.2	E-UTRAN – NR PSCell FR1 DL active BWP switch with FR1 SCell in non-DRX in synchronous EN-DC
	A.10.3.5.3.1	E-UTRAN – NR PSCell FR1 DL active BWP switch in non-DRX in synchronous EN-DC

A.3.29.3 Principle of testing for UE capable of SA operation with only NR bands with shared spectrum access

In Annex A, test cases in table A.3.29.3-1 are defined for UE capable of NR SA operation with only NR band(s) with shared spectrum access and are not required for UE supporting also other NR band(s) (i.e. band with no shared spectrum access).

Table A.3.29.3-1: Test cases applicable to UE supporting SA operation with only NR bands with shared spectrum access

Test category	Section	Test case
	A.11.4.5.2.1	NR FR1- NR FR1 DL active BWP switch of PCell with non-DRX in SA

Active BWP switching	A.11.4.5.2.2	NR FR1 DL active BWP switch with non-DRX in SA
	A.11.4.5.3.1	NR FR1 DL active BWP switch of Cell with non-DRX in SA

A.3.30 CSI-RS configurations for RRM

A.3.30.1 FDD

Table A.3.30.1-1: CSI-RS RRM Reference Measurement Channels for SCS=15kHz

	CSI-RS.RRM.FR1.1 FDD
CSI-RS-ResourceConfigMobility	
subcarrierSpacing, kHz	15
CSI-RS-CellMobility	
cellId[note1]	0
nrofPRBs	48
startPRB	0
density	3
CSI-RS-Resource-Mobility	
csi-RS-Index	0
slotConfig: ms20 [note2]	slot1
associatedSSB	True
ssb-Index [note3]	0
isQuasiColocated	True
firstOFDMSymbolInTimeDomain [note4]	10
sequenceGenerationConfig	0
Others	
nrofPorts	1
CDM Type	NoCDM
EPRE ratio to SSS, dB	0
Note1: unless specified otherwise Note2: unless specified otherwise Note3: assume the same SS/PBCH block index of the corresponding cell in the test case Note4: unless specified otherwise	

A.3.30.2 TDD

Table A.3.30.2-1: CSI-RS RRM Reference Measurement Channels for SCS=15kHz

	CSI-RS.RRM.FR1.1 TDD
CSI-RS-ResourceConfigMobility	
subcarrierSpacing, kHz	15
CSI-RS-CellMobility	
cellId[note1]	0
nrofPRBs	48
startPRB	0
density	3
CSI-RS-Resource-Mobility	
csi-RS-Index	0
slotConfig: ms20 [note2]	slot1
associatedSSB	True
ssb-Index [note3]	0

isQuasiColocated	True
firstOFDMSymbolInTimeDomain note4	10
sequenceGenerationConfig	0
Others	
nrofPorts	1
CDM Type	NoCDM
EPRE ratio to SSS, dB	0
Note1: unless specified otherwise Note2: unless specified otherwise Note3: assume the same SS/PBCH block index of the corresponding cell in the test case Note4: unless specified otherwise	

Table A.3.30.2-2: CSI-RS RRM Reference Measurement Channels for SCS=30kHz

	CSI-RS.RRM.FR1.2 TDD
CSI-RS-ResourceConfigMobility	
subcarrierSpacing, kHz	30
CSI-RS-CellMobility	
cellId note1	0
nrofPRBs	48
startPRB	0
density	3
CSI-RS-Resource-Mobility	
csi-RS-Index	0
slotConfig: ms20 note2	slot1
associatedSSB	True
ssb-Index note3	0
isQuasiColocated	True
firstOFDMSymbolInTimeDomain note4	10
sequenceGenerationConfig	0
Others	
nrofPorts	1
CDM Type	NoCDM
EPRE ratio to SSS, dB	0
Note1: unless specified otherwise Note2: unless specified otherwise Note3: assume the same SS/PBCH block index of the corresponding cell in the test case Note4: unless specified otherwise	

Table A.3.30.2-3: CSI-RS RRM Reference Measurement Channels for SCS=120kHz

	CSI-RS.RRM.FR2.1 TDD
CSI-RS-ResourceConfigMobility	
subcarrierSpacing, kHz	120
CSI-RS-CellMobility	
cellId note1	0
nrofPRBs	48
startPRB	0
density	3
CSI-RS-Resource-Mobility	
csi-RS-Index	0
slotConfig: ms20 note2	slot1

associatedSSB	True
ssb-Index note3	0
isQuasiColocated	True
firstOFDMSymbolInTimeDomain note4	10
sequenceGenerationConfig	0
Others	
nrofPorts	1
CDM Type	NoCDM
EPRE ratio to SSS, dB	0
Note1: unless specified otherwise Note2: unless specified otherwise Note3: assume the same SS/PBCH block index of the corresponding cell in the test case Note4: unless specified otherwise	

A.3.31 PRS Configurations

A.3.31.1. PRS Configurations for FR1

A.3.31.1.1. PRS pattern 1 in FR1: SCS=15 KHz

Table A.3.31.1.1-1: PRS.1 FR1: PRS Pattern 1 for SSB SCS=15 KHz

PRS Parameters	Values					
Reference channel	PRS.1.1 FR1	PRS.1.2 FR1	PRS.1.3 FR1		PRS.1.4 FR1	
Resource index in resource set	0	0	0	1	0	1
PRS periodicity	160ms					
PRS Resource set slot offset Note 1	10 ms					
PRS Resource slot offset (slot) Note 1	0	4	0		4	
PRS RE offset Note 1	0		0	1	0	1
SCS	15kHz					
PRS comb size	2	4	2		4	
Number of PRS symbol	4	4	4		4	
Repetion factor	2	1	2		1	
PRS resource time gap (slot)	1	1	1		1	
RB numbers containing PRS within channel BW Note 1	0-23	0-103	0-23		0-103	
PRS Start PRB	0					
Note 1: Unless otherwise specified in the test case						

A.3.31.1.2. PRS pattern 2 in FR1: SCS=30 KHz

Table A.3.31.1.2-1: PRS.2 FR1: PRS Pattern 2 for SCS=30 KHz

PRS Parameters	Values					
Reference channel	PRS.2.1 FR1	PRS.2.2 FR1	PRS.2.3 FR1		PRS.2.4 FR1	
Resource index in resource set	0	0	0	1	0	1
PRS periodicity	160ms					
PRS Resource set slot offset Note 1	10 ms					
PRS Resource slot offset (slot) Note 1	0	4	0		4	
PRS RE offset Note 1	0		0	1	0	1
SCS	30kHz					
PRS comb size	2	4	2		4	
Number of PRS symbol	4	4	4		4	
Repetion factor	2	1	2		1	
PRS resource time gap (slot)	1	1	1		1	

RB numbers containing PRS within channel BW Note 1	0-23	0-131	0-23	0-131
PRS Start PRB	0			
Note 1: Unless otherwise specified in the test case				

A.3.31.2. PRS Configurations for FR2

A.3.31.2.1. PRS pattern 1 in FR2: SCS=120 KHz

Table A.3.31.2.1-1: PRS.1 FR2: PRS Pattern 1 for SCS=120 KHz

PRS Parameters	Values					
Reference channel	PRS.1.1 FR2	PRS.1.2 FR2	PRS.1.3 FR2		PRS.1.4 FR2	
Resource index in resource set	0	0	0	1	0	1
PRS periodicity	160ms					
PRS Resource set slot offset Note 1	10 ms					
PRS Resource slot offset (slot) Note 1	0	4	0		4	
PRS RE offset Note 1	0		0	1	0	1
SCS	120kHz					
PRS comb size	2	4	2		4	
Number of PRS symbol	4	4	4		4	
Repetion factor	2	1	2		1	
PRS resource time gap (slot)	1	1	1		1	
RB numbers containing PRS within channel BW Note 1	0-31	0-127	0-31		0-127	
PRS Start PRB	0					
Note 1: Unless otherwise specified in the test case						

A.3.32 NR sidelink discovery

A.3.32.1 Introduction

This clause also defines the principle and the reference configurations that are applicable to test cases verifying RRM core requirements for NR sidelink discovery.

A.3.32.2 Reference resource pool configurations for NR Sidelink Discovery

Table A.3.32.2-1: SL-BWP configuration for NR sidelink discovery

Field	Value	Comment
SL-BWP-ConfigCommon-r16		
sl-BWP-Generic-r16		
sl-LengthSymbols-r16	sym14	All 14 symbols in a slot without S-SSB are used for sidelink
sl-StartSymbol-r16	sym0	Symbol #0 is the starting symbol used for sidelink in a slot without S-SSB
sl-BWP-DiscPoolConfigCommon-r17		
sl-DiscRxPool-r17		Indicates the resource pool for reception on the configured BWP. 1 entry
SL-ResourcePool-r16[1]	Set according to Table A.3.21.2-2	Entry 1

sl-DiscTxPoolSelected-r17		Indicates the resources pool for mode 2 sidelink communication on the configured BWP. 1 entry
SL-ResourcePoolConfig-r16[1]		Entry 1
sl-ResourcePool-r16	Set according to Table A.3.21.2-2	

A.3.32.3 Principle of Testing

The UE capable of both V2X sidelink communication and NR sidelink discovery does not have to pass the test for interruption at NR sidelink discovery configuration defined in clause 9.1.6.1, if this UE has already passed the test case for interruption due to V2X sidelink communication defined in clause 9.1.6.1.

A.3.33 PRS Processing Window (PPW) configurations

Table A.3.33-1: Reference PPW configuration

PPW Parameters	Unit	Values
Reference PPW		PPW.1
Periodicity	slot	Note 1
Offset	slot	Note 2
Length	ms	10
Type		1A
Priority		st1
Note 1: Same as PRS resource set periodicity as used in the test case. Note 2: Same as PRS resource with smallest offset as used in the test case.		

A.3.34 Testing principles for test cases related to PRS measurements

A.3.34.1 Introduction

In annex A test cases are defined for verifying various type of PRS measurement and accuracy requirements.

A.3.34.2 Test cases in RRC_INACTIVE state

In Annex A, PRS measurement test cases are defined with 4 samples and with reduced number of samples in RRC_INACTIVE state. The testing principle for these test cases is as follows:

- A UE capable of *supportedDL-PRS-ProcessingSamples-RRC-Inactive* [34] is only required to pass the test cases with reduced number of samples.
- A UE not capable of *supportedDL-PRS-ProcessingSamples-RRC-Inactive* [34] is required to pass the test cases with 4 samples.

In Annex A, PRS measurement delay test cases are defined for both PRS-RSRP and PRS-RSRPP measurements in RRC_INACTIVE state. The testing principle for these test cases is as follows:

- A UE capable of both PRS-RSRP and PRS-RSRPP measurements is required to pass either PRS-RSRP measurement delay test or PRS-RSRPP measurement delay test.

In Annex A, PRS measurement delay test cases are defined for both RSTD and UE Rx-Tx time difference measurements in RRC_INACTIVE state. The testing principle for these test cases is as follows:

- A UE capable of both RSTD and UE Rx-Tx time difference measurements is required to pass either RSTD measurement delay test or UE Rx-Tx time difference measurement delay test.

A.3.34.3 Test cases for PRS measurements with gaps in RRC_CONNECTED state

In Annex A, PRS measurement test cases are defined with 4 samples and with reduced number of samples with measurement gaps in RRC_CONNECTED state. The testing principle for these test cases is as follows:

- A UE capable of *supportedDL-PRS-ProcessingSamples* [34] is only required to pass the test cases with reduced number of samples.

- A UE not capable of *supportedDL-PRS-ProcessingSamples* [34] is required to pass the test cases with 4 samples.

In Annex A, PRS measurement delay test cases are defined for both PRS-RSRP and PRS-RSRPP measurements with measurement gaps in RRC_CONNECTED state. The testing principle for these test cases is as follows:

- A UE capable of both PRS-RSRP and PRS-RSRPP measurements is required to pass either PRS-RSRP measurement delay test or PRS-RSRPP measurement delay test.

A.3.34.4 Test cases for PRS measurements without gaps in RRC_CONNECTED state

In Annex A, PRS measurement test cases are defined with 4 samples and with reduced number of samples without measurement gaps in RRC_CONNECTED state. The testing principle for these test cases is as follows:

- A UE capable of *supportedDL-PRS-ProcessingSamples* [34] is only required to pass the test cases with reduced number of samples.

- A UE not capable of *supportedDL-PRS-ProcessingSamples* [34] is required to pass the test case with 4 samples.

In Annex A, PRS measurement delay test cases are defined for both PRS-RSRP and PRS-RSRPP measurements without measurement gaps in RRC_CONNECTED state. The testing principle for these test cases is as follows:

- A UE capable of both PRS-RSRP and PRS-RSRPP measurements is required to pass either PRS-RSRP measurement delay test or PRS-RSRPP measurement delay test.

In Annex A, PRS measurement delay test cases are defined for both RSTD and UE Rx-Tx time difference measurements without measurement gaps in RRC_CONNECTED state. The testing principle for these test cases is as follows:

- A UE capable of both RSTD and UE Rx-Tx time difference measurements is required to pass either RSTD measurement delay test or UE Rx-Tx time difference measurement delay test.

A.3.35 Testing principle for RedCap UE

A.3.35.1 Introduction

This clause defines a principle which is applicable to test cases verifying RRM requirements for RedCap UE.

A.3.35.2 Principle of testing for FR1

For RedCap UEs supporting 1 Rx branch, all single carrier tests specified in clause A.16 and A.18 except for tests defined for 2 Rx and/or FR2 shall be tested on any band.

For RedCap UEs supporting 2Rx branches, all single carrier tests specified in clause A.16 and A.18 except for tests defined for 1 Rx and/or FR2 shall be tested on any band.

A.3.35.3 Principle of testing for FR2

For RedCap UEs, all single carrier tests specified in clause A.17 and A.18 except for tests defined for FR1 shall be tested on any band.

A.3.36 Testing related to Satellite access

A.3.36.1 Introduction

In annex A test cases are defined for verifying various type of RRM requirements related to satellite access.

A.3.36.2 Principle of testing GSO and NGSO scenarios

In Annex A, RRM test cases related to satellite access are defined for both GSO and NGSO. The testing principle for these test cases is as follows:

- A UE capable of GSO only is required to pass the test cases with GSO.
- A UE capable of NGSO only is required to pass the test cases with NGSO.
- A UE capable of both GSO and NGSO is required to pass the test cases with NGSO only.

Support of GSO and NGSO scenario is indicated via *ntn-ScenarioSupport-r17*.

A.3.36.2 Principle of testing different RRM requirements

In Annex A, RRM test cases related to satellite access are defined for all applicable RRM requirements. The testing principle for these test cases is as follows:

- A UE capable of NTN only is required to pass all the test cases defined in clause A.14.
- A UE capable of both TN and NTN is required to pass the test cases for NTN specific requirements in Table A.3.36.2-1.

Table A.3.36.2-1: Test cases for NTN specific requirements

Clause	Test case slogan

A.14.1.2	Cell reselection to FR1 intra-frequency NR cell for UE configured with [capability for enhanced requirements]
A.14.1.3	Time-based cell reselection to FR1 intra-frequency NR cell
A.14.1.4	Location-based cell reselection to FR1 intra-frequency NR cell
A.14.1.7	Cell reselection to FR1 inter-frequency NR cell for UE configured with [capability for enhanced requirements]
A.14.1.8	Time-based Cell reselection to FR1 inter-frequency NR satellite access case
A.14.1.9	Location-based Cell reselection to FR1 inter-frequency NR satellite access case
A.14.2.1.3	Intra-frequency SAN time-based conditional Handover from FR1 to FR1
A.14.2.1.4	Inter-frequency SAN time-based conditional Handover from FR1 to FR1
A.14.2.1.5	Intra-frequency SAN distance-based conditional Handover from FR1 to FR1
A.14.2.1.6	Inter-frequency SAN distance-based conditional Handover from FR1 to FR1
A.14.3.1.1	NR UE Transmit Timing Test for FR1
A.14.5.1.1	SA event triggered reporting tests without gap under non-DRX
A.14.5.1.2	SA event triggered reporting tests without gap under DRX
A.14.5.1.3	SA event triggered reporting tests without gap under non-DRX with SSB index reading
A.14.5.1.4	SA event triggered reporting tests with single measurement gap under non-DRX for satellite access
A.14.5.1.5	SA event triggered reporting tests with FNO concurrent gaps under DRX for satellite access
A.14.5.1.6	SA event triggered reporting tests with PPO concurrent gaps under non-DRX with SSB index reading for satellite access
A.14.5.2.1	Event triggered reporting test without gap under non-DRX
A.14.5.2.2	Event triggered reporting tests without gap under DRX
A.14.6.3.1	SA intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell
A.14.6.3.2	SA Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell
A.14.6.4.1	SSB based L1-RSRP measurement
A.14.6.4.2	CSI-RS based L1-RSRP measurement on resource set with repetition off

A.3.36.3 Principle of testing different ephemeris formats

In Annex A, RRM test cases related to satellite access are defined and satellite ephemeris information are sent to UE in each test case.

EphemerisInfo is configured in format of velocity state vector (PositionVelocity) for the following test cases:

RRC_IDLE state mobility

A.14.1.3, A.14.1.4, A.14.1.5, A.14.1.6, A.14.1.9 and A.14.1.10

Handover

A.14.2.1.3, A.14.2.1.4, A.14.2.1.5 and A.14.2.1.6

Timing

A.14.3.1

Radio link Monitoring

A.14.4.1.1, A.14.4.1.2, A.14.4.1.5 and A.14.4.1.6

Beam Failure Detection and Link recovery procedures

A.14.4.2.1, A.14.4.2.3 and A.14.4.2.5

Active BWP switch

A.14.4.3.1

UE specific CBW change

A.14.4.4.1

Pathloss reference signal switching delay

A.14.4.5.1

Intra-frequency Measurements

A.14.5.1.1, A.14.5.1.3 and A.14.5.1.5

Inter-frequency Measurements

A.14.5.2.1, A.14.5.2.3 and A.14.5.2.7

L1-RSRP measurement for beam reporting

A.14.5.3.1 and A.14.5.3.3

SS-RSRP

A.14.6.1.1

SS-RSRQ

A.14.6.2.1

SS-SINR

A.14.6.3.1

L1-RSRP measurement for beam reporting

A.14.6.4.1

EphemerisInfo is configured in format of orbital parameters (Orbital) for the following test cases:

RRC_IDLE state mobility

A.14.1.1, A.14.1.2, A.14.1.5 and A.14.1.6

Handover

A.14.2.1.1, A.14.2.1.2

RRC Connection Mobility Control

A.14.2.2.1, A.14.2.2.2 and A.14.2.2.3

Timing

A.14.3.2

Radio link Monitoring

A.14.4.1.3, A.14.4.1.4, A.14.4.1.7 and A.14.4.1.8

Beam Failure Detection and Link recovery procedures

A.14.4.2.2, A.14.4.2.4 and A.14.4.2.6

Active BWP switch

A.14.4.3.2

Intra-frequency Measurements

A.14.5.1.2, A.14.5.1.4 and A.14.5.1.6

Inter-frequency Measurements

A.14.5.2.2, A.14.5.2.4, A.14.5.2.6 and A.14.5.2.8

L1-RSRP measurement for beam reporting

A.14.5.3.2 and A.14.5.3.4

SS-RSRP

A.14.6.1.2

SS-RSRQ

A.14.6.2.2

SS-SINR

A.14.6.3.2

L1-RSRP measurement for beam reporting

A.14.6.4.2

A.3.36.4 General setup for SIB19

The general parameters for SIB19 setup is specified in Table A.3.36.4-1.

Table A.3.36.2-1: Test cases for NTN specific requirements

Parameter	Unit	Test 1
Interval between adjacent epoch time	s	LEO: 2.56 GEO: 10.24
ntn-UlSyncValidityDuration	s	LEO: 5s GEO: 900s
cellSpecificKoffset	slot	LEO: 8 GEO: 256
kmac	slot	Not configured
ta-Common		0
ta-CommonDrift		0
ta-CommonDriftVariant		0
ntn-PolarizationDL		linear
ntn-PolarizationUL		linear
ephemerisInfo		
ta-Report		Not configured

A.4 EN-DC tests with all NR cells in FR1

A.4.1 Void

A.4.2 Void

A.4.3 RRC_CONNECTED state mobility

A.4.3.1 Void

A.4.3.2 RRC Connection Mobility Control

A.4.3.2.1 Void

A.4.3.2.2 Random Access

A.4.3.2.2.1 4-step RA type contention based random access test in FR1 for PSCell in EN-DC

A.4.3.2.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in clause 6.2.2.2 and clause 7.1.2 in an AWGN model.

For this test two cells are used, with the configuration of Cell 1 (E-UTRA PCell) specified in clause A.3.7.2.1 and Cell 2 configured as PSCell in FR1. Supported test parameters are shown in Table A.4.3.2.2.1.1-1. UE capable of EN-DC with PSCell in FR1 needs to be tested by using the parameters in Table A.4.3.2.2.1.1-2.

Table A.4.3.2.2.1.1-1: Supported test configurations for contention based random access test in FR1 for PSCell in EN-DC

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations depending on UE capability	

Table A.4.3.2.2.1.1-2: General test parameters for contention based random access test in FR1 for PSCell in EN-DC

Parameter		Unit	Test-1	Comments
SSB Configuration	Config 1,2		SSB pattern 3 in FR1	As defined in A.3.10
	Config 3,4		SSB pattern 4 in FR1	
Duplex Mode for Cell 2	Config 1,2		FDD	
	Config 3,4		TDD	
TDD Configuration	Config 3,4		TDDConf.2.1	
OCNG Pattern Note 1			OCNG pattern 1	As defined in A.3.2.1.
PDSCH parameters	Config 1,2		SR.1.1 FDD	As defined in A.3.1.1.

Note 4		Config 3,4		SR.2.1 TDD	
RMSI CORESET Reference Channel		Config 1,2		CR.1.1 FDD	
		Config 3,4		CR.2.1 TDD	
Dedicated CORESET Reference Channel		Config 1,2		CCR.1.1 FDD	
		Config 3,4		CCR.2.1 TDD	
NR RF Channel Number				1	
EPRE ratio of PSS to SSS			dB	0	
EPRE ratio of PBCH_DMRS to SSS			dB		
EPRE ratio of PBCH to PBCH_DMRS			dB		
EPRE ratio of PDCCH_DMRS to SSS			dB		
EPRE ratio of PDCCH to PDCCH_DMRS			dB		
EPRE ratio of PDSCH_DMRS to SSS			dB		
EPRE ratio of PDSCH to PDSCH_DMRS			dB		
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	Power of SSB with index 0 is setto be above configured *rsrp-ThresholdSSB*
	N_{oc}	Config 1,2	dBm/15kHz	-98	
		Config 3,4		-101	
	$\hat{E}_s / N_{oc}$		dB	3	
	SS-RSRP Note 3		dBm/ SCS	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured *rsrp-ThresholdSSB*
	N_{oc}	Config 1,2	dBm/15kHz	-98	
		Config 3,4		-101	
	$\hat{E}_s / N_{oc}$		dB	-17	
	SS-RSRP Note 3		dBm/ SCS	-115	
Io Note 2		Config 1,2	dBm	-65.3/9.36MHz	For symbols without SSB index 1
		Config 3,4		-62.2/38.16MHz	
ss-PBCH-BlockPower			dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [2].
Configured UE transmitted power ($P_{CMAX,\ f,c}$)			dBm	23	As defined in clause 6.2.4 in TS 38.101-1.
PRACH Configuration				FR1 PRACH configuration 1	As defined in A.3.8.2.
Propagation Condition			-	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.
Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.
Note 3: Void
Note 4: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.

A.4.3.2.2.1.2 Test Requirements

Contention based random access is triggered by *not* explicitly assigning a random access preamble via dedicated signalling in the downlink.

A.4.3.2.2.1.2.1 Random Access Preamble Transmission

To test the UE behavior specified in Clause 6.2.2.2.1.1 the System Simulator shall receive the Random Access Preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SS-RSRP above the configured *rsrp-ThresholdSSB*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.4.3.2.2.1.2.2 Random Access Response Reception

To test the UE behavior specified in Clause 6.2.2.2.1.2 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a Random Access Response *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for Random Access Response(s) and shall transmit the msg3 if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.4.3.2.2.1.2.3 No Random Access Response Reception

To test the UE behavior specified in clause 6.2.2.2.1.3 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.4.3.2.2.1.2.4 Receiving an UL grant for msg3 retransmission

To test the UE behavior specified in clause 6.2.2.2.1.4, the System Simulator shall provide an UL grant for msg3 retransmission following a successful Random Access Response.

The UE shall re-transmit the msg3 upon the reception of an UL grant for msg3 retransmission..

A.4.3.2.2.1.2.5 Void

ClauseA.4.3.2.2.1.2.6 Void

ClauseA.4.3.2.2.1.2.7 Contention Resolution Timer expiry

To test the UE behavior specified in Clause 6.2.2.2.1.6 the System Simulator shall *not* send a response to a msg3.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if the Contention Resolution Timer expires.

A.4.3.2.2.2 4-step RA type n on-contention based random access test in FR1 for PSCell in EN-DC

A.4.3.2.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in clause 6.2.2.2 and clause 7.1.2 in an AWGN model.

For this test two cells are used, with the configuration of Cell 1 (E-UTRA PCell) specified in clause A.3.7.2.1 and Cell 2 configured as PSCell in FR1. Supported test parameters are shown in Table A.4.3.2.2.2.1-1. UE capable of EN-DC with PSCell in FR1 needs to be tested by using the parameters in Table A.4.3.2.2.2.1-2 for SSB-based non-contention based random access test (Test 1) and CSI-RS-based non-contention based random access test (Test 2). Test 2 is only applicable to UE which supports csi-RSRP-AndRSRQ-MeasWithSSB or csi-RSRP-AndRSRQ-MeasWithoutSSB.

Table A.4.3.2.2.2.1-1: Supported test configurations for non-contention based random access test in FR1 for PSCell in EN-DC

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations depending on UE capability	

Table A.4.3.2.2.2.1-2: General test parameters for non-contention based random access test in FR1 for PSCell in EN-DC

Parameter		Unit	Test-1	Test-2	Comments
SSB Configuration	Config 1,2		SSB pattern 3 in FR1	SSB pattern 3 in FR1	As defined in A.3.10
	Config 3,4		SSB pattern 4 in FR1	SSB pattern 4 in FR1	
CSI-RS Configuration	Config 1,2		N/A	CSI-RS.1.1 FDD	As defined in A.3.1.4
	Config 3,4			CSI-RS.2.1 TDD	
Duplex Mode for Cell 2	Config 1,2		FDD	FDD	
	Config 3,4		TDD	TDD	
TDD Configuration	Config 3,4		TDDConf.2.1	TDDConf.2.1	
OCNG Pattern Note 1			OCNG pattern 1	OCNG pattern 1	As defined in A.3.2.1.
PDSCH parameters Note 4	Config 1,2		SR.1.1 FDD	SR.1.1 FDD	As defined in A.3.1.1.
	Config 3,4		SR.2.1 TDD	SR.2.1 TDD	

RMSI CORESET Reference Channel		Config 1,2		CR.1.1 TDD	CR.1.1 TDD	
		Config 3,4		CR.2.1 TDD	CR.2.1 TDD	
Dedicated CORESET Reference Channel		Config 1,2		CCR.1.1 TDD	CCR.1.1 TDD	
		Config 3,4		CCR.2.1 TDD	CCR.2.1 TDD	
NR RF Channel Number				1	1	
EPRE ratio of PSS to SSS			dB	0	0	
EPRE ratio of PBCH_DMRS to SSS			dB			
EPRE ratio of PBCH to PBCH_DMRS			dB			
EPRE ratio of PDCCH_DMRS to SSS			dB			
EPRE ratio of PDCCH to PDCCH_DMRS			dB			
EPRE ratio of PDSCH_DMRS to SSS			dB			
EPRE ratio of PDSCH to PDSCH_DMRS			dB			
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	3	Power of SSB with index 0 is set to be above configured *rsrp-ThresholdSSB*
	N_{oc}	Config 1,2	dBm/15kHz	-98	-98	
		Config 3,4		-101	-101	
	$\hat{E}_s / N_{oc}$		dB	3	3	
	SS-RSRP Note 3		dBm/ SCS	-95	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	-17	Power of SSB with index 1 is set to be below configured *rsrp-ThresholdSSB*
	N_{oc}	Config 1,2	dBm/15kHz	-98	-98	
		Config 3,4		-101	-101	
	$\hat{E}_s / N_{oc}$		dB	-17	-17	
	SS-RSRP Note 3		dBm/ SCS	-115	-115	
Io Note 2		Config 1,2	dBm	-65.3/9.36MHz	-65.3/9.36MHz	For symbols without SSB index 1
		Config 3,4		-62.2/38.16MHz	-62.2/38.16MHz	
ss-PBCH-BlockPower			dBm/ SCS	-5	-5	As defined in clause 6.3.2 in TS 38.331 [2].
Configured UE transmitted power ($P_{CMAX,\ f,c}$)			dBm	23	23	As defined in clause 6.2.4 in TS 38.101-1.
PRACH Configuration				FR1 PRACH configuration 2	FR1 PRACH configuration 3	As defined in A.3.8.2.
Propagation Condition			-	AWGN	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.
Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.
Note 3: Void
Note 4: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.

A.4.3.2.2.2.2 Test Requirements

Non-Contention based random access is triggered by explicitly assigning a random access preamble via dedicated signalling in the downlink. In the test, the non-contention based random access procedure is not initialized for Other SI requested from UE or beam failure recovery.

A.4.3.2.2.2.2.1 SSB-based Random Access Preamble Transmission

In Test-1, to test the UE behavior specified in Clause 6.2.2.2.2.1 for SSB-based Random Access Preamble tranmsision, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs configured, the System Simulator shall receive the Random Access Preamble which has the Preamble Index associated with the SSB with index 0.

In addition, the System Simulator shall receive the Random Access Preamble on the PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0, and the selected PRACH occasion shall belongs to the PRACH occassions permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2.. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.4.3.2.2.2.2.2 CSI-RS-based Random Access Preamble Transmission

In Test-2, to test the UE behavior specified in Clause 6.2.2.2.2.1 for CSI-RS-based Random Access Preamble tranmsision, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with CSI-RSs configured, the System Simulator shall receive the Random Access Preamble which has the Preamble Index associated with the CSI-RS configured.

In addition, the System Simulator shall receive the Random Access Preamble on the PRACH occasion which belongs to the PRACH occasions corresponding to the CSI-RS configured, and the selected PRACH occasion shall belongs to the PRACH occassions permitted by the restrictions given by the *ra-OccasionList*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.4.3.2.2.2.2.3 Random Access Response Reception

To test the UE behavior specified in Clause 6.2.2.2.2.2 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a Random Access Response *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for Random Access Response(s) if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS38.321 [7], and transmit with the calculated PRACH transmission power if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.4.3.2.2.2.4 No Random Access Response Reception

To test the UE behavior specified in clause 6.2.2.2.3 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window configured in *RACH-ConfigCommon*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.4.3.2.2.3 2-step RA type contention based random access test in FR1 for PSCell in EN-DC

A.4.3.2.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that the behaviour of the random access procedure is according to the requirements and that the MsgA PRACH, MsgA PUSCH power settings and timing are within specified limits. This test will verify the requirements in clause 6.2.2.3 and clause 7.1.2 in an AWGN model.

For this test two cells are used, with the configuration of Cell 1 (E-UTRA PCell) specified in clause A.3.7.2.1 and Cell 2 configured as PSCell in FR1. Supported test parameters are shown in Table A.4.3.2.2.3.1-1. UE capable of EN-DC with PSCell in FR1 needs to be tested by using the parameters in Table A.4.3.2.2.3.1-2.

Table A.4.3.2.2.3.1-1: Supported test configurations for 2-step RA type contention based random access test in FR1 for PSCell in EN-DC

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations depending on UE capability	

Table A.4.3.2.2.3.1-2: General test parameters for 2-step RA type contention based random access test in FR1 for PSCell in EN-DC

Parameter		Unit	Test-1	Comments
SSB Configuration	Config 1,2		SSB pattern 3 in FR1	As defined in A.3.10
	Config 3,4		SSB pattern 4 in FR1	
Duplex Mode for Cell 2	Config 1,2		FDD	
	Config 3,4		TDD	
TDD Configuration	Config 3,4		TDDConf.2.1	
OCNG Pattern Note 1			OCNG pattern 1	As defined in A.3.2.1.
PDSCH parameters Note 3	Config 1,2		SR.1.1 FDD	As defined in A.3.1.1.
	Config 3,4		SR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1,2		CR.1.1 FDD	
	Config 3,4		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1,2		CCR.1.1 FDD	
	Config 3,4		CCR.2.1 TDD	

NR RF Channel Number				1	
EPRE ratio of PSS to SSS			dB	0	
EPRE ratio of PBCH_DMRS to SSS			dB		
EPRE ratio of PBCH to PBCH_DMRS			dB		
EPRE ratio of PDCCH_DMRS to SSS			dB		
EPRE ratio of PDCCH to PDCCH_DMRS			dB		
EPRE ratio of PDSCH_DMRS to SSS			dB		
EPRE ratio of PDSCH to PDSCH_DMRS			dB		
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	Power of SSB with index 0 is set to be above configured *msgA-RSRP-ThresholdSSB*
	N_{oc}	Config 1,2	dBm/15kHz	-98	
		Config 3,4		-101	
	$\hat{E}_s / N_{oc}$		dB	3	
	SS-RSRP Note 2		dBm/ SCS	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured *msgA-RSRP-ThresholdSSB*
	N_{oc}	Config 1,2	dBm/15kHz	-98	
		Config 3,4		-101	
	$\hat{E}_s / N_{oc}$		dB	-17	
	SS-RSRP Note 2		dBm/ SCS	-115	
Io		Config 1,2	dBm	-65.3/9.36MHz	For symbols without SSB index 1
		Config 3,4		-62.2/38.16MHz	
ss-PBCH-BlockPower			dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [2].
Configured UE transmitted power ($P_{CMAX,\ f,c}$)			dBm	23	As defined in clause 6.2.4 in TS 38.101-1.
MsgA Configuration				FR1 MsgA configuration 1	As defined in A.3.20.2.1.
msgA-RSRP-ThresholdSSB			dBm	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [2].
Propagation Condition			-	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.
Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.
Note 3: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.

A.4.3.2.2.3.2 Test Requirements

Contention based random access is triggered by *not* explicitly assigning a random access preamble via dedicated signalling in the downlink.

A.4.3.2.2.3.2.1 MsgA Transmission

To test the UE behaviour specified in Clause 6.2.2.3.1.1 the System Simulator shall receive the MsgA with a preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SS-RSRP above the configured *msgA-RSRP-ThresholdSSB.*

In addition, the power applied to all MsgA transmission shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first MsgA preamble shall be -22 dBm with an accuracy specified in clause 6.3.4.2 of TS

38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.4.3.2.2.3.2.2 MsgB Reception

To test the UE behaviour specified in Clause 6.2.2.3.1.2 the System Simulator shall transmit a MsgB with fallbackRAR containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a MsgB *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for MsgB(s) and shall transmit the msg3 if the MsgB with a fallbackRAR contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires if all received MsgB's contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all MsgA transmission shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first MsgA preamble shall be -22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.4.3.2.2.3.2.3 No MsgB Reception

To test the UE behavior specified in clause 6.2.2.3.1.3 the System Simulator shall transmit a MsgB with fallbackRAR containing a successRAR message and a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires if no MsgB is received within the MsgB Response window.

In addition, the power applied to all MsgA transmission shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first MsgA preamble shall be -30 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.4.3.2.2.4 2-step RA type n on-contention based random access test in FR1 for PSCell in EN-DC

A.4.3.2.2.4.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the MsgA PRACH, MsgA PUSCH power settings and timing are within specified limits. This test will verify the requirements in clause 6.2.2.3 and clause 7.1.2 in an AWGN model.

For this test two cells are used, with the configuration of Cell 1 (E-UTRA PCell) specified in clause A.3.7.2.1 and Cell 2 configured as PSCell in FR1. Supported test parameters are shown in Table A.4.3.2.2.4.1-1. UE capable of EN-DC with PSCell in FR1 needs to be tested by using the parameters in Table A.4.3.2.2.4.1-2.

Table A.4.3.2.2.4.1-1: Supported test configurations for non-contention based random access test for 2-step RA type in FR1 for PSCell in EN-DC

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations depending on UE capability	

Table A.4.3.2.2.4.1-2: General test parameters for non-contention based random access test for 2-step RA type in FR1 for PSCell in EN-DC

Parameter		Unit	Test-1	Comments
SSB Configuration	Config 1,2		SSB pattern 3 in FR1	As defined in A.3.10
	Config 3,4		SSB pattern 4 in FR1	
Duplex Mode for Cell 2	Config 1,2		FDD	
	Config 3,4		TDD	
TDD Configuration	Config 3,4		TDDConf.2.1	
OCNG Pattern Note 1			OCNG pattern 1	As defined in A.3.2.1.
PDSCH parameters Note 3	Config 1,2		SR.1.1 FDD	As defined in A.3.1.1.
	Config 3,4		SR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1,2		CR.1.1 TDD	
	Config 3,4		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1,2		CCR.1.1 TDD	
	Config 3,4		CCR.2.1 TDD	
NR RF Channel Number			1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH_DMRS to SSS		dB		
EPRE ratio of PBCH to PBCH_DMRS		dB		
EPRE ratio of PDCCH_DMRS to SSS		dB		
EPRE ratio of PDCCH to PDCCH_DMRS		dB		
EPRE ratio of PDSCH_DMRS to SSS		dB		
EPRE ratio of PDSCH to PDSCH_DMRS		dB		
SSB with index 0	$\hat{E}_s / I_{ot}$	dB	3	Power of SSB with index 0 is set to be above configured *msgA-RSRP-ThresholdSSB*
	N_{oc} Config 1,2	dBm/15kHz	-98	
	N_{oc} Config 3,4		-101	
	$\hat{E}_s / N_{oc}$	dB	3	
	SS-RSRP	dBm/ SCS	-95	

SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured *msgA-RSRP-ThresholdSSB*
	N_{oc}	Config 1,2	dBm/15kHz	-98	
		Config 3,4		-101	
	$\hat{E}_s / N_{oc}$		dB	-17	
	SS-RSRP		dBm/ SCS	-115	
Io Note 2		Config 1,2	dBm	-65.3/9.36MHz	For symbols without SSB index 1
		Config 3,4		-62.2/38.16MHz	
ss-PBCH-BlockPower			dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [2].
Configured UE transmitted power ($P_{CMAX,f,c}$)			dBm	23	As defined in clause 6.2.4 in TS 38.101-1.
MsgA Configuration				FR1 MsgA configuration 2	As defined in A.3.20.2.
msgA-RSRP-ThresholdSSB			dBm	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [2].
Propagation Condition			-	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.
Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.
Note 3: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.

A.4.3.2.2.4.2 Test Requirements

Non-Contention based random access is triggered by explicitly assigning a random access preamble via dedicated signalling in the downlink. In the test, the non-contention based random access procedure is not initialized for Other SI requested from UE or beam failure recovery.

A.4.3.2.2.4.2.1 MsgA Transmission

In Test-1, to test the UE behavior specified in Clause 6.2.2.3.2.1 for MsgA transmission, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs configured, the System Simulator shall receive the MsgA which has the Preamble Index associated with the SSB with index 0.

In addition, the System Simulator shall receive the MsgA on the PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0, and the selected PRACH occasion shall belongs to the PRACH occasions permitted by the restrictions given first by the *msgA-SSB-SharedRO-MaskIndex* if configured, or next by the *ra-ssb-OccasionMaskIndex* if configured.

In addition, the power applied to all MsgA transmission shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be -22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18] , where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.4.3.2.2.4.2.2 MsgB Reception

To test the UE behavior specified in Clause 6.2.2.3.2.2 the System Simulator shall transmit a MsgB containing a successRAR MAC subPDU corresponding to the transmitted Random Access Preamble after 5 MsgA transmissions have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a MsgB *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for MsgB if the MsgB contains a successRAR MAC subPDU corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS38.321 [7], and transmit with the calculated MsgA transmission power if Random Access Responses Reception has not been considered as successful.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first preamble shall be -22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18] , where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.4.3.2.2.4.2.3 No MsgB Reception

To test the UE behavior specified in clause 6.2.2.3.2.3 the System Simulator shall transmit a MsgB corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS38.321 [7], and transmit with the calculated MsgA transmission power when the backoff time expires if no MsgB is received within the MsgB Response window configured in *RACH-ConfigGenericTwoStepRA.*

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first preamble shall be -22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18] , where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.4.3.2.3 Void

A.4.3.3 Handover with PSCell from EN-DC to EN-DC with known target PSCell in FR1

A.4.3.3.1 Test Purpose and Environment

This test is to verify the requirement for E-UTRA intra frequency handover with NR FR1 PSCell change specified in clause 5.8 in E-UTRA RRM specification [15] for the case when the target PSCell is known by the UE. Supported test configurations are shown in table A.4.3.3.1-1.

The general test parameters are given in Table A.4.3.3.1-2. E-UTRA cells and NR cells specific test parameters are given in Table A.4.3.3.1-3 and A.4.3.3.1-4. In the test there are four cells: Cell1 and Cell2 are PCell and target PCell on E-UTRA carrier, Cell3 and Cell4 are PSCell and target PSCell on NR FR1 carrier. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. Before the test starts the UE is connected to Cell1 (E-UTRA PCell) and Cell3 (NR PSCell) with EN-DC mode. At the start of time duration T1, the UE has not any timing information of cell 2 and cell 4. During T1, the UE is configured in the measurement control information that event-triggered reporting with Event A3 for neighbour cells on E-UTRA carrier and NR carrier.

The Cell2 and Cell4 becomes known to the UE, and E-UTRA PCell (Cell1) shall send a RRC message implying handover with PSCell to cell 2 and cell4 during T2. The RRC message implying handover with PSCell shall be sent to the UE after the UE has reported Event A3 for SpCells.The start of T3 is defined as the end of the last TTI containing the RRC message implying handover with PSCell.

Table A.4.3.3.1-1: Handover with PSCell from EN-DC to EN-DC test configurations in FR1

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, PSCell FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, PSCell TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, SCell FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, SCell TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.4.3.3.1-2: General test parameters for Handover with PSCell from EN-DC to EN-DC

Parameter		Unit	Value	Comment
RF Channel Number			1, 2	One is E-UTRA RF channel and one is NR RF channel
Initial conditions	Active PCell		Cell1	On E-UTRA RF channel number 1.
	E-UTRA Neighbouring cell		Cell2	On E-UTRA RF channel number 1.
	Active PSCell		Cell3	On NR RF channel number 1.
	NR Neighbouring cell		Cell4	On NR RF channel number 1.
Final conditions	Active PCell		Cell2	
	Active PSCell		Cell4	
CP length			Normal	Applicable to Cell1, Cell2, Cell3 and Cell4.
A3-Offset		dB	0	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
DRX			OFF	Continuous monitoring of primary cell
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between same RAT cells		μs	3	Synchronous cells
T1		s	5	
T2		s	≤5	
T3		s	1	

Table A.4.3.3.1-3: E-UTRAN cell specific test parameters for Handover with PSCell from EN-DC to EN-DC

Parameter	Unit	Cell1			Cell2		
		T1	T2	T3	T1	T2	T3
Duplex mode		FDD or TDD			FDD or TDD		
TDD special subframe configuration[Note1]		6			6		
TDD uplink-downlink configuration[Note1]		1			1		

$BW_{channel}$		5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100			5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100		
PDSCH parameters: DL Reference Measurement Channel Note2		5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD 5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD			5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD 5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD		
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel Note2		5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD 5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD			5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD 5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD		
OCNG Patterns defined in A.3.2.1 (FDD) and in A.3.2.2(TDD) Note2		5 MHz: OP.20 FDD 10MHz: OP.1 FDD 20 MHz: OP.17 FDD 5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD		OP.18 FDD OP.2 FDD OP.14 FDD OP.10 TDD OP.2 TDD OP.8 TDD	5MHz: OP.18 FDD 10MHz: OP.2 FDD 20MHz: OP.14 FDD 5MHz: OP.10 TDD 10MHz: OP.2 TDD 20MHz: OP.8 TDD		OP.20 FDD OP.1 FDD OP.17 FDD OP.9 TDD OP.1 TDD OP.7 TDD
PRACH configuration		-			4, As specified in table 5.7.1-2 in TS 36.211		
PBCH_RA	dB	0			0		
PBCH_RB	dB						
PSS_RA	dB						
SSS_RA	dB						
PCFICH_RB	dB						
PHICH_RA	dB						
PHICH_RB	dB						
PDCCH_RA	dB						
PDCCH_RB	dB						
PDSCH_RA	dB						
PDSCH_RB	dB						
OCNG_RA Note3	dB						
OCNG_RB Note3	dB						
N_{oc} Note4	dBm/15 kHz	-98					
$\hat{E}_s/N_{oc}$	dB	8	8	8	-infinite	11	11
$\hat{E}_s/I_{ot}$	dB	8	-3.3	-3.3	-infinite	2.36	2.36
RSRP Note5	dBm/15 kHz	-90	-90	-90	-infinite	-87	-87
SCH_RP Note5	dBm/15 kHz	-90	-90	-90	-infinite	-87	-87
Io Note5	dBm/Ch BW	$-61.58+10\cdot\log(N_{RB,c}/50)$	$-57.23+10\cdot\log(N_{RB,c}/50)$		$-61.58+10\cdot\log(N_{RB,c}/50)$	$-57.23+10\cdot\log(N_{RB,c}/50)$	
Propagation Condition		AWGN					
Antenna Configuration		1x2					

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211.
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: E_s/I_{ot}, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.4.3.3.1-4: NR cell specific test parameters for Handover with PSCell from EN-DC to EN-DC

Parameter		Unit	Cell 3			Cell 4		
			T1	T2	T3	T1	T2	T3
NR RF Channel Number			1			1		
Duplex mode	Config 1, 4		FDD					
	Config 2,3,5,6		TDD					
TDD configuration	Config 1, 4		Not Applicable					
	Config 2, 5		TDDConf.1.1					
	Config 3, 6		TDDConf.2.1					
$BW_{channel}$	Config 1,2,4,5	MHz	10: $N_{RB,c}$ = 52					
	Config 3,6		40: $N_{RB,c}$ = 106					
BWP BW	Config 1,2,4,5	MHz	10: $N_{RB,c}$ = 52					
	Config 3,6		40: $N_{RB,c}$ = 106					
DRx Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD					
	Config 2,5		SR.1.1 TDD					
	Config 3,6		SR.2.1 TDD					
CORESET Reference Channel	Config 1,4		CR.1.1 FDD					
	Config 2,5		CR.1.1 TDD					
	Config 3,6		CR.2.1 TDD					
TRS configuration	Config 1,4		TRS.1.1 FDD					
	Config 2,5		TRS.1.1 TDD					
	Config 3,6		TRS.1.2 TDD					
OCNG Patterns			OP.1					
SMTC Configuration			SMTC.1					
SSB Configuration	Config 1,2,4,5		SSB.1 FR1					
	Config 3,6		SSB.2 FR1					
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15 kHz					
	Config 3,6		30 kHz					
PUCCH/PUSCH subcarrier spacing	Config 1,2,4,5	kHz	15 kHz					
	Config 3,6		30 kHz					
PRACH configuration			FR1 PRACH configuration 1					
BWP configuration	Initial DL BWP		DLBWP.0.1					
	Dedicated DL BWP		DLBWP.1.1					
	Initial UL BWP		ULBWP.0.1					
	Dedicated UL BWP		ULBWP.1.1					
EPRE ratio of PSS to SSS		dB	0					
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								

EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} Note2		dBm/15kHz	-98					
N_{oc} Note2	Config 1,2,4,5	dBm/SCS	-98					
	Config 3,6		-95					
$\hat{E}_s/I_{ot}$		dB	8	-3.3	-3.3	-Infinity	2.36	2.36
$\hat{E}_s/N_{oc}$		dB	8	8	8	-Infinity	11	11
SSB_RP	Config 1,2,4,5	dBm/SCS	-90	-90	-90	-Infinity	-87	-87
	Config 3,6	dBm/SCS	-87	-87	-87	-Infinity	-84	-84
Io Note3	Config 1,2,4,5	dBm/ 9.36MHz	-61.41	-57.06	-57.06	-61.41	-57.06	-57.06
	Config 3,6	dBm/ 38.16MHz	-55.31	-50.96	-50.96	-55.31	-50.96	-50.96
Propagation condition		-	AWGN			AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.4.3.3.2 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 60 ms from the beginning of time period T3.

The UE shall transmit the PRACH preamble to Cell 4 less than 87 ms from the beginning of time period T3.

The rate of correct handovers observed during repeated tests shall be at least 90%.

The rate of correct PSCell addition observed during repeated tests shall be at least 90%.

NOTE: The handover requirements for handover with PSCell for EN-DC is defined in clause 5.8 in [15] as:

$D_{HOwithPSCel_PSCell} = T_{RRC_delay} + T_{search} + T_{IU} + T_{processing}$

Where:

T_{RRC_delay} = 20 ms for 'RRC connection reconfiguration (NR SCG establishment/ /modification/release)'.

T_{search} = 0 ms for known cell.

T_{IU} = 15 ms in the test configuration.

$T_{processing}$ = 25ms for source Cell and target Cell are in the same FR.

This gives a total of 60ms for handover delay.

NOTE: The PSCell change delay for handover with PSCell for EN-DC is defined in clause 5.8 in [15] as:

$D_{HOwithPSCel_PSCell} = T_{RRC_delay} + T_{processing} + T_{search} + T_{\Delta} + T_{PSCell_DU} + T_{PCell_DU} + 2$ ms

Where:

T_{RRC_delay} = 20 ms for 'RRC connection reconfiguration (NR SCG establishment/ /modification/release)'.

$T_{processing}$ = 25ms for source Cell and target Cell are in the same FR.

T_{search} = 0 ms for known cell.

T_{Δ} = 20 ms for fine time tracking and acquiring full timing information of the target cell. 1 SMTC period.

T_{PSCell_DU} = 20 ms based on PSCell addition test in TS38.133 A.4.5.7.

T_{PCell_DU} = 0 ms, no clolliding with PCell RACH.

This gives a total of 87ms for handover delay.

A.4.4 Timing

A.4.4.1 UE transmit timing

A.4.4.1.1 NR UE Transmit Timing Test for FR1

A.4.4.1.1.1 Test Purpose and environment

The purpose of this test is to verify that the UE can follow frame timing change of the connected gNodeb and that the UE initial transmit timing accuracy, maximum amount of timing change in one adjustment, minimum and maximum adjustment rate are within the specified limits. This test will verify the requirements in clause 7.1.2. Supported test configurations are shown in Table 4.4.1.1.1-1.

Table A.4.4.1.1.1-1: Supported test configurations for FR1 PSCell

Configuration	Description
1	LTE FDD, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	LTE FDD, NR TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
3	LTE FDD, NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
4	LTE TDD, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
5	LTE TDD, NR TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
6	LTE TDD, NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

The test consists of E-UTRA PCell and NR PSCell. The configuration for E-UTRA is given in A.3.7.2.1. Table A.4.4.1.1.1-2 defines the parameters to be configured and strength of the transmitted signals. The transmit timing is verified by the UE transmitting SRS using the configuration defined in Table A.4.4.1.1.1-3.

Table A.4.4.1.1.1-2: Cell Specific Test Parameters for UL Transmit Timing test

Parameter	Unit	Config	Test1	Test2	Band Group
SSB ARFCN		1,2,3,4,5,6	Freq1	Freq1	
Duplex Mode		1,4	FDD		
		2,3,5,6	TDD		
TDD configuration		1,4	Not Applicable		
		2,5	TDDConf.1.1		
		3,6	TDDConf.2.1		
$BW_{channel}$	MHz	1,4	10: $N_{RB,c}$ = 52		
		2,5	10: $N_{RB,c}$ = 52		

		3,6	40: $N_{RB,c}$ = 106		
Initial BWP Configuration		1,2,3,4,5,6	DLBWP.0.1 ULBWP.0.1		
Dedicated BWP Configuration		1,2,3,4,5,6	DLBWP.1.1 ULBWP.1.1		
DRx Cycle	ms	1,2,3,4,5,6	N/A	DRX.8[Note5]	
PDSCH Reference measurement channel		1,4	SR.1.1 FDD		
		2,5	SR.1.1 TDD		
		3,6	SR.2.1 TDD		
RMSI CORESET Reference Channel		1,4	CR.1.1 FDD		
		2,5	CR.1.1 TDD		
		3,6	CR.2.1 TDD		
Dedicated CORESET Reference Channel		1,4	CCR.1.1 FDD		
		2,5	CCR.1.1 TDD		
		3,6	CCR.2.1 TDD		
OCNG Patterns		1,2,3,4,5,6	OP.1		
SSB configuration		1,4	SSB.1 FR1		
		2,5	SSB.1 FR1		
		3,6	SSB.2 FR1		
SMTC configuration		1,2,3,4,5,6	SMTC.2		
TRS configuration		1,4	TRS.1.1 FDD		
		2,5	TRS.1.1 TDD		
		3,6	TRS.1.2 TDD		
PDSCH/PDCCH subcarrier spacing	kHz	1,2,4,5	15		
		3,6	30		
EPRE ratio of PSS to SSS	dB	1,2,3,4,5,6	0	0	
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} [Note2]	dBm/15 kHz	1,2,3,4,5,6	-98	-98	
N_{oc} [Note2]	dBm/SCS	1,2,4,5	-98	-98	
		3,6	-95	-95	
$\hat{E}_s / I_{ot}$		1,2,3,4,5,6	3	3	
$\hat{E}_s / N_{oc}$		1,2,3,4,5,6	3	3	
SS-RSRP[Note3]	dBm/SCS	1,2,4,5	-95	-95	
		3,6	-92	-92	
Io[Note3]	dBm/9.36MHz	1,2,4,5	-65.2	-65.2	
	dBm/38.1MHz	3,6	-59.2	-59.2	
Propagation condition		1,2,3,4,5,6	AWGN		
SRS Config		1,2,4,5	SRSConf.1[Note6]	SRSConf.3[Note6]	

		3, 6	SRSConf.1[Note6]	SRSConf.2[Note6]	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: DRx related parameters are given in Table A.3.3.8-1
Note 6: SRS configs are given in Table A.4.4.1.1.1-3

Table A.4.4.1.1.1-3: SRS Configuration for Timing Accuracy Test

	Field	SRSConf.1	SRSConf.2	SRSConf.3	Comments
SRS-ResourceSet	srs-ResourceSetId	0	0	0	
	srs-ResourceIdList	0	0	0	
	resourceType	Periodic	Periodic	Periodic	
	Usage	Codebook	Codebook	Codebook	
SRS-Resource	SRS-ResourceId	0	0	0	
	nrofSRS-Ports	Port1	Port1	Port1	
	transmissionComb	n2	n2	n2	
	combOffset-n2	0	0	0	
	cyclicShift-n2	0	0	0	
	resourceMapping startPosition	0	0	0	
	resourceMapping nrofSymbols	n1	n1	n1	
	resourceMapping repetitionFactor	n1	n1	n1	
	freqDomainPosition	0	0	0	
	freqDomainShift	0	0	0	
	freqHopping c-SRS	14 for test configuration 1,2,4,5 25 for test configuration 3,6	25	14	Matches $N_{RB,c}$
	freqHopping b-SRS	0	0	0	
	freqHopping b-hop	0	0	0	
	groupOrSequenceHopping	Neither	Neither	Neither	
	resourceType	Periodic	Periodic	Periodic	
	periodicityAndOffset-p	sl1, 0	sl640, 5	sl320, 3	Offset to align with DRx periodicity
	sequenceId	0	0	0	Any 10 bit number

A.4.4.1.1.2 Test requirements

The test sequence shall be carried out in RRC_CONNECTED for every test case.

Following will be the test sequence for this test

1) Set up E-UTRA PCell according to parameters given in Table A.3.7.2.1-1 and setup NR PSCell according to parameters given in Table A.4.4.1.1.1-1.

2) After connection set up with the cell, the test equipment will verify that the timing of the NR cell is within $(N_{TA} + N_{TA_offset})\times T_c \pm T_e$ of the first detected path of DL SSB.

   a. The N_{TA} offset value (in T_c units) is 25600

   b. The T_e values depend on the DL and UL SCS for which the test is being run and are given in Table 7.1.2-1

3) The test system shall adjust the timing of the DL path by values given in Table A.4.4.1.1.2-1

Table A.4.4.1.1.2-1: Adjustment Value for DL Timing

SCS of SSB signals (kHz)	Adjustment Value	
	Test1	Test2
15	$+64*64T_c$	$+32*64T_c$
30	$+32*64T_c$	$+16*64T_c$

4) The test system shall verify that the adjustment step size and the adjustment rate shall be according to requirements specified in Clause 7.1.2 Table 7.1.2.1-1 until the UE transmit timing offset is within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ respective to the first detected path (in time) of DL SSB. Skip this step for test 2 with DRX configured.

5) The test system shall verify that the UE transmit timing offset stays within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first detected path of DL SSB. For Test 2 the UE transmit timing offset shall be verified for the first transmission in the DRX cycle immediately after DL timing adjustment.

A.4.4.2 UE timer accuracy

A.4.4.3 Timing advance

A.4.4.3.1 EN-DC FR1 timing advance adjustment accuracy

A.4.4.3.1.1 Test Purpose and Environment

The purpose of the test is to verify UE Timing Advance adjustment delay and accuracy requirement defined in clause 7.3.

A.4.4.3.1.2 Test Parameters

Supported test configurations are shown in table A.4.4.3.1.2-1. Both timing advance adjustment delay and accuracy are tested by using the parameters in table A.4.4.3.1.2-2, A.4.4.3.1.2-3 and A.4.4.3.1.2-4. The configuration of Cell 1 (LTE PCell) is specified in clause A.3.7.2.1.

In all test cases, two cells are used. Cell 1 is the PCell in the primary Timing Advance Group (pTAG) and cell 2 is the PSCell is in the secondary Timing Advance Group (sTAG). Each test consists of two successive time periods, with time duration of T1 and T2 respectively. In each time period, timing advance commands for sTAG are sent to the UE and Sounding Reference Signals (SRS), as specified in table A.4.4.3.1.2-3, are sent from the UE and received by the test equipment. By measuring the reception of the SRS, the transmit timing, and hence the timing advance adjustment accuracy, can be measured for PSCell in sTAG.

During time period T1, the test equipment shall send one message with a Timing Advance Command MAC Control Element for sTAG, as specified in clause 6.1.3.4 in TS 38.321 [7]. The Timing Advance Command value shall be set to 31, which according to clause 4.2 in TS 38.213 [3] results in zero adjustment of the Timing Advance. In this way, a reference value for the timing advance for sTAG used by the UE is established.

During time period T2, the test equipment shall send a sequence of messages with Timing Advance Command MAC Control Elements for sTAG, with Timing Advance Command value specified in table A.4.4.3.1.2-2. This value shall result in changes of the timing advance for sTAG used by the UE, and the accuracy of the change shall then be measured, using the SRS sent from the UE.

As specified in clause 7.3.2.1, the UE adjusts its uplink timing at slot n+k for a timing advance command received in slot n. This delay must be taken into account when measuring the timing advance adjustment accuracy, via the SRS sent from the UE.

The UE Time Alignment Timer, described in clause 5.2 in TS 38.321, shall be configured so that it does not expire in the duration of the test.

Table A.4.4.3.1.2-1: Timing advance supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.4.4.3.1.2-2: General test parameters for timing advance

Parameter	Unit	Value	Comment
RF channel number		Cell 1: 1 Cell 2: 2	1 for E-UTRAN PCell 2 for NR PSCell
Initial DL BWP		DLBWP.0.1	As specified in Table A.3.9.2.1-1
Dedicated DL BWP		DLBWP.1.1	As specified in Table A.3.9.2.2-1
Initial UL BWP		ULBWP.0.1	As specified in Table A.3.9.3.1-1
Dedicated UL BWP		ULBWP.1.1	As specified in Table A.3.9.3.2-1
Timing Advance Command (T_A) value during T1		31	$N_{TA_new} = N_{TA_old}$ for the purpose of establishing a reference value from which the timing advance adjustment accuracy can be measured during T2
Timing Advance Command (T_A) value during T2		39	*For 15 kHz SCS* $N_{TA_new} = N_{TA_old} + 8192*T_c$ *For 30 kHz SCS* $N_{TA_new} = N_{TA_old} + 4096*T_c$ (based on equation in clause 4.2 of TS 38.213 [3])
T1	s	5	
T2	s	5	

Table A.4.4.3.1.2-3: Cell specific test parameters for timing advance

Parameter		Unit	Test1	
			T1	T2
Duplex mode	Config 1,4		FDD	
	Config 2,3,5,6		TDD	
TDD configuration	Config 1,4		Not Applicable	
	Config 2,5		TDDConf.1.1	
	Config 3,6		TDDConf.2.1	
$BW_{channel}$	Config 1,4	MHz	10: $N_{RB,c} = 52$	
	Config 2,5		10: $N_{RB,c} = 52$	

	Config 3,6		40: $N_{RB,c}$ = 106
BWP BW	Config 1,4	MHz	10: $N_{RB,c}$ = 52
	Config 2,5		10: $N_{RB,c}$ = 52
	Config 3,6		40: $N_{RB,c}$ = 106
DRx Cycle		ms	Not Applicable
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2,5		SR.1.1 TDD
	Config 3,6		SR2.1 TDD
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD
	Config 2,5		CR.1.1 TDD
	Config 3,6		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1,4		CCR.1.1 FDD
	Config 2,5		CCR.1.1 TDD
	Config 3,6		CCR.2.1 TDD
TRS configuration	Config 1,4		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
OCNG Patterns			OCNG pattern 1
SSB Configuration	Config 1,2,4,5		SSB.1 FR1
	Config 3,6		SSB.2 FR1
SMTC configuration	Config 1,2,4,5		SMTC.1 FR1
	Config 3,6		SMTC.2 FR1
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15 kHz
	Config 3,6		30 kHz
PUCCH/PUSCH subcarrier spacing	Config 1,2,4,5	kHz	15 kHz
	Config 3,6		30 kHz
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note2		dBm/15kHz	-98
N_{oc} Note2	Config 1,2,4,5	dBm/SCS	-98
	Config 3,6		-95
$\hat{E}_s / I_{ot}$		dB	3
$\hat{E}_s / N_{oc}$		dB	3
Io Note3	Config 1,2,4,5	dBm/9.36MHz	-67.57
	Config 3,6	dBm/38.16MHz	-62.58
Propagation condition		-	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.4.4.3.1.2-4: Sounding Reference Symbol Configuration for timing advance

Field		Value	Comment
c-SRS	Config 1,2,4,5	12	Frequency hopping is disabled
	Config 3,6	24	
b-SRS		0	
b-hop		0	
freqDomainPosition		0	Frequency domain position of SRS
freqDomainShift		0	
groupOrSequenceHopping		neither	No group or sequence hopping
SRS-PeriodicityAndOffset		sl5=2 for SCS 15kHz sl5=4 for SCS 30kHz	Once every 5 slots
pathlossReferenceRS		ssb-Index=0	SSB #0 is used for SRS path loss estimation
usage		Codebook	Codebook based UL transmission
startPosition		0	resourceMapping setting. SRS on last symbol of slot, and 1symbols for SRS without repetition.
nrofSymbols		n1	
repetitionFactor		n1	
combOffset-n2		0	transmissionComb setting
cyclicShift-n2		0	
nrofSRS-Ports		port1	Number of antenna ports used for SRS transmission
Note: For further information see clause 6.3.2 in TS 38.331 [2].			

A.4.4.3.1.3 Test Requirements

The UE shall apply the signalled Timing Advance value for PSCell in sTAG to the transmission timing at the designated activation time i.e. *k+1* slots after the reception of the timing advance command, where k=5.

The Timing Advance adjustment accuracy for PSCell in sTAG shall be within the limits specified in clause 7.3.2.2.

The rate of correct Timing Advance adjustments observed during repeated tests shall be at least 90%.

A.4.5 Signaling characteristics

A.4.5.1 Radio link Monitoring

In the following clause, any uplink signal transmitted by the UE is used for detecting the In-/Out-of-Sync state of the UE. In terms of measurement, the uplink signal is verified on the basis of the UE output power:

For intra-band contiguous carrier aggregation, transmit OFF power is measured as the mean power per component carrier.

For UE with multiple transmit antennas, transmit OFF power is measured as the mean power at each transmit connector.

- UE output power higher than Transmit OFF power -50 dBm (as defined in TS 38.101-3 [20]) means uplink signal
- UE output power equal to or less than Transmit OFF power -50 dBm (as defined in TS 38.101-3 [20]) means no uplink signal.

A.4.5.1.1 Radio Link Monitoring Out-of-sync Test for FR1 PSCell configured with SSB-based RLM RS in non-DRX mode

A.4.5.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PSCell. This test will partly verify the FR1 PSCell radio link monitoring requirements in clause 8.1.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0, and *purpose* set to '*rlf*'. Supported test configurations are shown in table A.4.5.1.1.1-1. The test parameters are given in Tables A.4.5.1.1.1-2, A.4.5.1.1.1-3, and A.4.5.1.1.1-4 below. There are two cells, Cell 1 is the E-UTRAN PCell, and Cell 2 is the PSCell, in the test. The E-UTRAN PCell setting refers to Table A.3.7.2.1-1. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.4.5.1.1.1-1 shows the variation of the downlink SNR in the active Cell 2 to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and Cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. The UE is configured to perform inter-frequency measurements using Gap Pattern ID #0 (40ms) in test 1.

Table A.4.5.1.1.1-1: Supported test configurations for FR1 PSCell

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.4.5.1.1.1-2: General test parameters for FR1 out-of-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active E-UTRA PCell			Cell 1
E-UTRA RF Channel Number			1
Active PSCell			Cell 2
RF Channel Number			2
Duplex mode	Config 1, 4		FDD
	Config 2, 3, 5, 6		TDD
$BW_{channel}$	Config 1, 4	MHz	10: $N_{RB,c}$ = 52
	Config 2, 5		10: $N_{RB,c}$ = 52
	Config 3, 6		40: $N_{RB,c}$ = 106
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1
TDD Configuration	Config 1, 4		Not Applicable
	Config 2, 5		TDDConf.1.1
	Config 3, 6		TDDConf.2.1
CORESET	Config 1, 4		CR.1.1 FDD

Reference Channel		Config 2, 5		CR.1.1 TDD
		Config 3, 6		CR.2.1 TDD
SSB Configuration		Config 1, 4		SSB.1 FR1
		Config 2, 5		SSB.1 FR1
		Config 3, 6		SSB.2 FR1
SMTC Configuration		Config 1, 2, 4, 5		SMTC.1
		Config 3, 6		SMTC.1
PDSCH/PDCCH subcarrier spacing		Config 1, 2, 4, 5		15 kHz
		Config 3, 6		30 kHz
PRACH Configuration		Config 1, 2, 4, 5		Table A.3.8.2.1-1
		Config 3, 6		Table A.3.8.2.1-1
SSB index assigned as RLM RS				0
OCNG parameters				OP.1
CP length				Normal
Correlation Matrix and Antenna Configuration				2x2 Low
Out of sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	4
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
DRX				*OFF*
Gap pattern ID				*gp0*
Layer 3 filtering				*Enabled*
T310 timer			ms	*0*
T311 timer			ms	1000
N310				1
N311				1
CSI-RS for CSI reporting		Config 1, 4		CSI-RS.1.1 FDD
		Config 2, 5		CSI-RS.1.1 TDD
		Config 3, 6		CSI-RS.2.1 TDD
CSI-RS for tracking		Config 1, 4		TRS.1.1 FDD
		Config 2, 5		TRS.1.1 TDD
		Config 3, 6		TRS.1.2 TDD
T1			s	0.2
T2			s	0.48
T3			s	0.48
D1			s	0.44
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts. Note 3: E-UTRAN is in non-DRX mode under test.				

Table A.4.5.1.1.1-3: Cell specific test parameters for FR1 (Cell 2) for out-of-sync radio link monitoring tests in non-DRX mode

Parameter	Unit	Test 1		
		T1	T2	T3
EPRE ratio of PDCCH DMRS to SSS	dB	4		
EPRE ratio of PDCCH to PDCCH DMRS	dB	0		

EPRE ratio of PBCH DMRS to SSS		dB	0		
EPRE ratio of PBCH to PBCH DMRS		dB			
EPRE ratio of PSS to SSS		dB			
EPRE ratio of PDSCH DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1, 4	dB	1	-7	-15
	Config 2, 5		1	-7	-15
	Config 3, 6		1	-7	-15
N_{oc}	Config 1, 4	dBm/15 kHz	-98		
	Config 2, 5		-98		
	Config 3, 6		-98		
N_{oc}	Config 1, 4	dBm/SCS	-98		
	Config 2, 5		-98		
	Config 3, 6		-95		
Propagation condition			TDL-C 300ns 100Hz		
Note 1: OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG. Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.					

Table A.4.5.1.1.1-4: Measurement gap configuration for out-of-sync tests in non-DRX mode

Field	Test 1
	Value
gapOffset	0
Note 1: E-UTRAN PCell and PSCell are SFN-synchronous and frame boundary aligned. (Ensure that RLM RS is partially overlapped with measurement gap).	

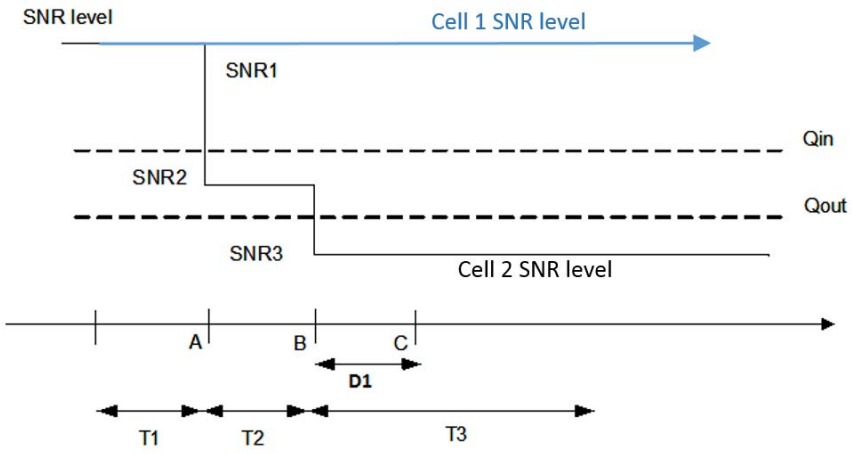

Figure A.4.5.1.1.1-1: SNR variation for out-of-sync testing

A.4.5.1.1.2 Test Requirements

The UE behaviour in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal in Cell 2 no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.1.2 Radio Link Monitoring In-sync Test for FR1 PSCell configured with SSB-based RLM RS in non-DRX mode

A.4.5.1.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PSCell. This test will partly verify the FR1 PSCell radio link monitoring requirements in clause 8.1.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0, and *purpose* set to '*rlf*'. Supported test configurations are shown in table A.4.5.1.2.1-1. The test parameters are given in Tables A.4.5.1.2.1-2, and A.4.5.1.2.1-3 below. There are two cells, Cell 1 is the E-UTRAN PCell, and Cell 2 is the PSCell, in the test. The E-UTRAN PCell setting refers to Table A.3.7.2.1-1. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.4.5.1.2.1-1 shows the variation of the downlink SNR in the active Cell 2 to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and Cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms.

Table A.4.5.1.2.1-1: Supported test configurations for FR1 PSCell

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.4.5.1.2.1-2: General test parameters for FR1 in-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active E-UTRA PCell			Cell 1
E-UTRA RF Channel Number			1
Active PSCell			Cell 2
RF Channel Number			2
Duplex mode	Config 1, 4		FDD
	Config 2, 3, 5, 6		TDD
$BW_{channel}$	Config 1, 4	MHz	10: $N_{RB,c}$ = 52
	Config 2, 5		10: $N_{RB,c}$ = 52
	Config 3, 6		40: $N_{RB,c}$ = 106
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1
TDD Configuration	Config 1, 4		Not Applicable
	Config 2, 5		TDDConf.1.1
	Config 3, 6		TDDConf.2.1
CORESET Reference Channel	Config 1, 4		CR.1.1 FDD
	Config 2, 5		CR.1.1 TDD
	Config 3, 6		CR.2.1 TDD
SSB Configuration	Config 1, 4		SSB.1 FR1
	Config 2, 5		SSB.1 FR1
	Config 3, 6		SSB.2 FR1
SMTC Configuration	Config 1, 2, 4, 5		SMTC.1
	Config 3, 6		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4, 5		15 kHz
	Config 3, 6		30 kHz
PRACH Configuration	Config 1, 2, 4, 5		Table A.3.8.2.1-1
	Config 3, 6		Table A.3.8.2.1-1
SSB index assigned as RLM RS			0
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2

	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			*OFF*
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*
T310 timer		ms	1000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD
	Config 2, 5		CSI-RS.1.1 TDD
	Config 3, 6		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1, 4		TRS.1.1 FDD
	Config 2, 5		TRS.1.1 TDD
	Config 3, 6		TRS.1.2 TDD
T1		s	0.2
T2		s	0.2
T3		s	0.24
T4		s	0.2
T5		s	0.88
D1		s	0.84
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts. Note 3: E-UTRAN is in non-DRX mode under test.			

Table A.4.5.1.2.1-3: Cell specific test parameters for FR1 (Cell 2) for in-sync radio link monitoring tests in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0				
EPRE ratio of PBCH DMRS to SSS		dB	0				
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1, 4	dB	1	-7	-15	-4.5	1
	Config 2, 5		1	-7	-15	-4.5	1
	Config 3, 6		1	-7	-15	-4.5	1
N_{oc}	Config 1, 4	dBm/15 kHz	-98				
	Config 2, 5		-98				
	Config 3, 6		-98				
N_{oc}	Config 1, 4	dBm/SCS	-98				
	Config 2, 5		-98				
	Config 3, 6		-95				
Propagation condition			TDL-C 300ns 100Hz				

Note 1: OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 4: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in Figure A.4.5.1.2.1-1.
Note 5: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 and T4 is modified as specified in clause A.3.6.

Table A.4.5.1.2.1-4: Void

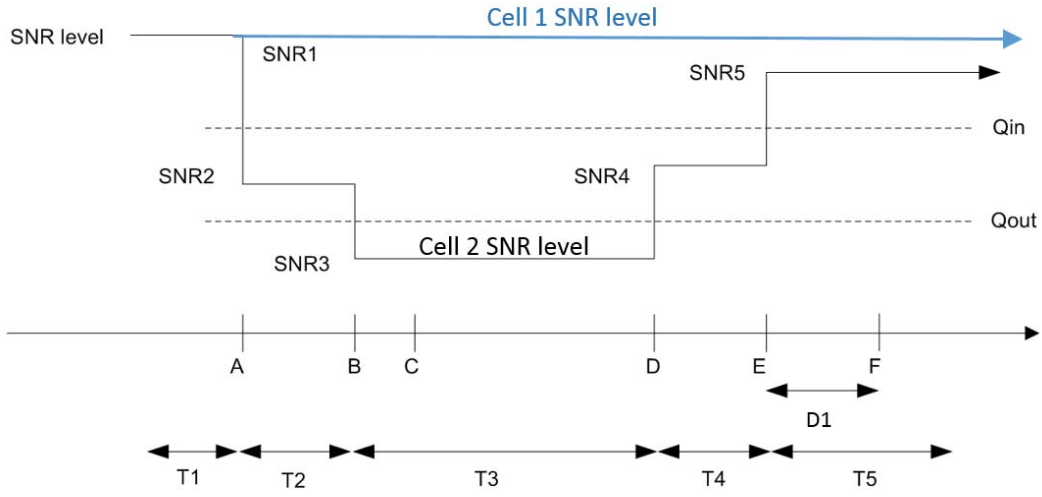

Figure A.4.5.1.2.1-1: SNR variation for in-sync testing

A.4.5.1.2.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.1.3 Radio Link Monitoring Out-of-sync Test for FR1 PSCell configured with SSB-based RLM RS in DRX mode

A.4.5.1.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PSCell when DRX is used. This test will partly verify the FR1 radio link monitoring requirements in clause 8.1.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0, and *purpose* set to '*rlf*'. Supported test configurations are shown in table A.4.5.1.3.1-1. The test parameters are given in Tables A.4.5.1.3.1-2 and A.4.5.1.3.1-3. There are two cells, Cell 1 is the E-UTRAN PCell, and Cell 2 is the PSCell, in the test. The E-UTRAN PCell setting refers to Table A.3.7.2.1-1. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.4.5.1.3.1-1 shows the variation of the downlink SNR in the active Cell 2 to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and Cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

Table A.4.5.1.3.1-1: Supported test configurations for FR1 PSCell

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.4.5.1.3.1-2: General test parameters for FR1 out-of-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active E-UTRA PCell			Cell 1
E-UTRA RF Channel Number			1
Active PSCell			Cell 2
RF Channel Number			2
Duplex mode	Config 1, 4		FDD
	Config 2, 3, 5, 6		TDD
$BW_{channel}$	Config 1, 4	MHz	10: $N_{RB,c}$ = 52
	Config 2, 5		10: $N_{RB,c}$ = 52
	Config 3, 6		40: $N_{RB,c}$ = 106
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1
TDD Configuration	Config 1, 4		Not Applicable
	Config 2, 5		TDDConf.1.1
	Config 3, 6		TDDConf.2.1
CORESET Reference Channel	Config 1, 4		CR.1.1 FDD
	Config 2, 5		CR.1.1 TDD
	Config 3, 6		CR.2.1 TDD
SSB Configuration	Config 1, 4		SSB.1 FR1
	Config 2, 5		SSB.1 FR1
	Config 3, 6		SSB.2 FR1
SMTC Configuration	Config 1, 2, 4, 5		SMTC.1
	Config 3, 6		SMTC.1
PDSCH/PDCCH	Config 1, 2, 4, 5		15 kHz
subcarrier spacing	Config 3, 6		30 kHz
PRACH Configuration	Config 1, 2, 4, 5		Table A.3.8.2.1-1
	Config 3, 6		Table A.3.8.2.1-1
SSB index assigned as RLM RS			0
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync	DCI format		1-0

transmission parameters	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX Configuration			DRX.3
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*
T310 timer		ms	*0*
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD
	Config 2, 5		CSI-RS.1.1 TDD
	Config 3, 6		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1, 4		TRS.1.1 FDD
	Config 2, 5		TRS.1.1 TDD
	Config 3, 6		TRS.1.2 TDD
T1		s	0.2
T2		s	0.68
T3		s	0.68
D1		s	0.64
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts. Note 3: E-UTRAN is in non-DRX mode under test.			

Table A.4.5.1.3.1-3: Cell specific test parameters for FR1 (Cell 2) for out-of-sync radio link monitoring tests in DRX mode

Parameter		Unit	Test 1		
			T1	T2	T3
EPRE ratio of PDCCH DMRS to SSS		dB	4		
EPRE ratio of PDCCH to PDCCH DMRS		dB	0		
EPRE ratio of PBCH DMRS to SSS		dB	0		
EPRE ratio of PBCH to PBCH DMRS		dB			
EPRE ratio of PSS to SSS		dB			
EPRE ratio of PDSCH DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1, 4	dB	1	-7	-15
	Config 2, 5		1	-7	-15
	Config 3, 6		1	-7	-15
N_{oc}	Config 1, 4	dBm/15kHz	-98		
	Config 2, 5		-98		
	Config 3, 6		-98		

N_{oc}	Config 1, 4	dBm/SCS	-98
	Config 2, 5		-98
	Config 3, 6		-95
Propagation condition			TDL-C 300ns 100Hz
Note 1: OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.			
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.			
Note 4: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in Figure A.4.5.1.3.1-1.			
Note 5: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6.			

Table A.4.5.1.3.1-4: Void

Table A.4.5.1.3.1-5: Void

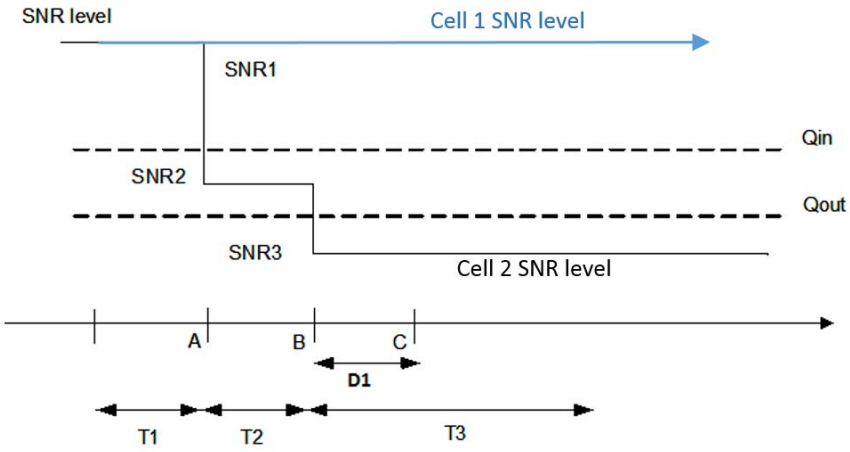

Figure A.4.5.1.3.1-1: SNR variation for out-of-sync testing

A.4.5.1.3.2 Test Requirements

The UE behaviour in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal in Cell 2 no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.1.4 Radio Link Monitoring In-sync Test for FR1 PSCell configured with SSB-based RLM RS in DRX mode

A.4.5.1.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PSCell when DRX is used. This test will partly verify the FR1 radio link monitoring requirements in clause 8.1.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0, and *purpose* set to '*rlf*'. Supported test configurations are shown in table A.4.5.1.4.1-1. The test parameters are given in Tables A.4.5.1.4.1-2, and A.4.5.1.4.1-3. There are two cells, Cell 1 is the E-UTRAN PCell, and Cell 2 is the PSCell, in the test. The E-UTRAN PCell setting refers to Table A.3.7.2.1-1. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.4.5.1.4.1-1 shows the variation of the downlink SNR in the active Cell 2 to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and Cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

Table A.4.5.1.4.1-1: Supported test configurations for FR1 PSCell

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.4.5.1.4.1-2: General test parameters for FR1 in-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active E-UTRA PCell			Cell 1
E-UTRA RF Channel Number			1
Active PSCell			Cell 2
RF Channel Number			2
Duplex mode	Config 1, 4		FDD
	Config 2, 3, 5, 6		TDD
$BW_{channel}$	Config 1, 4	MHz	10: $N_{RB,c}$ = 52
	Config 2, 5		10: $N_{RB,c}$ = 52
	Config 3, 6		40: $N_{RB,c}$ = 106
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1
TDD Configuration	Config 1, 4		Not Applicable
	Config 2, 5		TDDConf.1.1

		Config 3, 6		TDDConf.2.1
CORESET Reference Channel		Config 1, 4		CR.1.1 FDD
		Config 2, 5		CR.1.1 TDD
		Config 3, 6		CR.2.1 TDD
SSB Configuration		Config 1, 4		SSB.1 FR1
		Config 2, 5		SSB.1 FR1
		Config 3, 6		SSB.2 FR1
SMTC Configuration		Config 1, 2, 4, 5		SMTC.1
		Config 3, 6		SMTC.1
PDSCH/PDCCH subcarrier spacing		Config 1, 2, 4, 5		15 kHz
		Config 3, 6		30 kHz
PRACH Configuration		Config 1, 2, 4, 5		Table A A.3.8.2.1-1
		Config 3, 6		Table A.3.8.2.1-1
SSB index assigned as RLM RS				0
OCNG parameters				OP.1
CP length				Normal
Correlation Matrix and Antenna Configuration				2x2 Low
In sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	4
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	0
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
Out of sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	4
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
DRX Configuration				DRX.3
Gap pattern ID				N.A.
Layer 3 filtering				*Enabled*
T310 timer			ms	1000
T311 timer			ms	1000
N310				1
N311				1
CSI-RS for CSI reporting		Config 1, 4		CSI-RS.1.1 FDD
		Config 2, 5		CSI-RS.1.1 TDD

	Config 3, 6		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1, 4		TRS.1.1 FDD
	Config 2, 5		TRS.1.1 TDD
	Config 3, 6		TRS.1.2 TDD
T1		s	0.2
T2		s	0.2
T3		s	0.64
T4		s	0.2
T5		s	0.88
D1		s	0.84
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts. Note 3: E-UTRAN is in non-DRX mode under test.			

Table A.4.5.1.4.1-3: Cell specific test parameters for FR1 (Cell 2) for in-sync radio link monitoring tests in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0				
EPRE ratio of PBCH DMRS to SSS		dB	0				
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1, 4	dB	1	-7	-15	-4.5	1
	Config 2, 5		1	-7	-15	-4.5	1
	Config 3, 6		1	-7	-15	-4.5	1
N_{oc}	Config 1, 4	dBm/15 kHz	-98				
	Config 2, 5		-98				
	Config 3, 6		-98				
N_{oc}	Config 1, 4	dBm/SCS	-98				
	Config 2, 5		-98				
	Config 3, 6		-95				
Propagation condition			TDL-C 300ns 100Hz				
Note 1: OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG. Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs. Note 4: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in Figure A.4.5.1.4.1-1. Note 5: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 and T4 is modified as specified in clause A.3.6.							

Table A.4.5.1.4.1-4: Void

Table A.4.5.1.4.1-5: Void

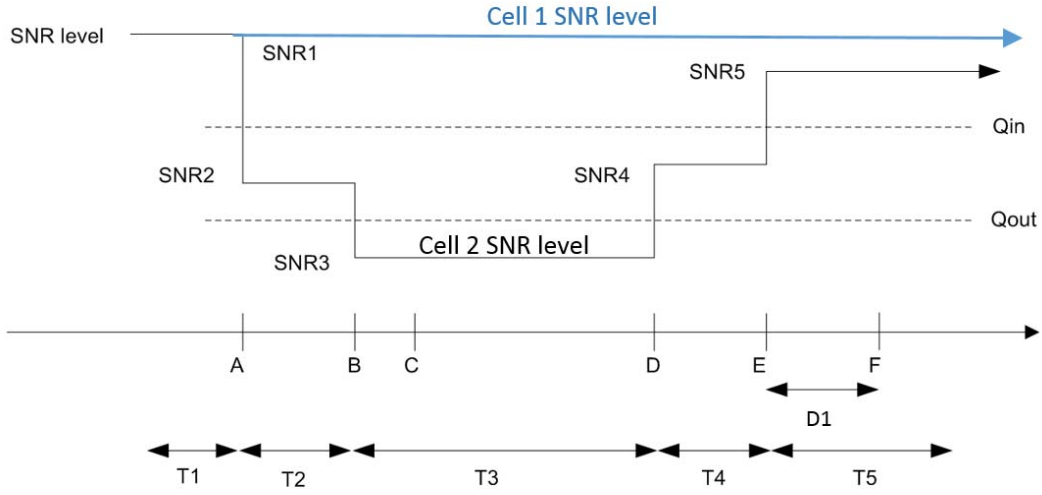

Figure A.4.5.1.4.1-1: SNR variation for in-sync testing

A.4.5.1.4.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.1.5 EN-DC Radio Link Monitoring Out-of-sync Test for FR1 PSCell configured with CSI-RS-based RLM in non-DRX mode

A.4.5.1.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PSCell when no DRX is used. This test will partly verify the FR1 PSCell CSI-RS Out-of-sync radio link monitoring requirements in clause 8.1.

The test parameters are given in Tables A.4.5.1.5.1-1, A.4.5.1.5.1-2, A.4.5.1.5.1-3, and A.4.5.1.5.1-3A below. There are two cells, cell 1 is the E-UTRAN PCell, and cell 2 is the PSCell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.4.5.1.5.1-1 shows the variation of the downlink SNR in the E-UTRAN PCell and the PSCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms). In the test, SSB0 is configured as the BFD-RS.

Table A.4.5.1.5.1-1: Supported test configurations for FR1 PSCell

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.4.5.1.5.1-2: General test parameters for FR1 PSCell for CSI-RS out-of-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active E-UTRA PCell			Cell 1
E-UTRA RF Channel Number			1
Active PSCell			Cell 2
RF Channel Number			2
Duplex mode	Config 1, 4		FDD
	Config 2, 3, 5, 6		TDD
TDD Configuration	Config 1, 4		Not Applicable
	Config 2, 5		TDDConf.1.1
	Config 3, 6		TDDConf.2.1
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1
RMC CORESET Reference Channel	Config 1, 4		CCR.1.1 FDD
	Config 2, 5		CCR.1.1 TDD
	Config 3, 6		CCR.2.1 TDD
SSB Configuration	Config 1, 4		SSB.1 FR1
	Config 2, 5		SSB.1 FR1
	Config 3, 6		SSB.2 FR1
SMTC Configuration	Config 1, 2, 4, 5		SMTC.1
	Config 3, 6		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4, 5		15 KHz
	Config 3, 6		30 KHz
TRS configuration	Config 1, 4		TRS.1.1 FDD
	Config 2, 5		TRS.1.1 TDD
	Config 3, 6		TRS.1.2 TDD
CSI-RS for RLM	Config 1, 4		Resource #4 in TRS.1.1 FDD
	Config 2, 5		Resource #4 in TRS.1.1 TDD
	Config 3, 6		Resource #4 in TRS.1.2 TDD
TCI configuration for PDCCH/PDSCH			TCI.State. 2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8

	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			OFF
Gap pattern ID			gp0
Layer 3 filtering			Enabled
T310 timer		ms	0
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for reporting	Config 1, 4		CSI-RS1.1 FDD
	Config 2, 5		CSI-RS.1.1 TDD
	Config 3, 6		CSI-RS.2.1 TDD
T1		s	0.2
T2		s	0.48
T3		s	0.48
D1		s	0.44
Note 1: UE-specific PDCCH is not transmitted after T1 starts. Note 2: E-UTRAN is in non-DRX mode under test.			

Table A.4.5.1.5.1-3: Cell specific test parameters for FR1 for CSI-RS out-of-sync radio link monitoring in non-DRX mode

Parameter		Unit	Test 1		
			T1	T2	T3
EPRE ratio of PDCCH DMRS to SSS		dB	4		
EPRE ratio of PDCCH to PDCCH DMRS		dB			
EPRE ratio of PBCH to PBCH DMRS		dB	0		
EPRE ratio of PSS to SSS		dB			
EPRE ratio of PBCH DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of PDSCH DMRS to SSS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1, 4	dB	1	-7	-15
	Config 2, 5		1	-7	-15
	Config 3, 6		1	-7	-15
N_{oc}	Config 1, 4	dBm/15KHz	-98		
	Config 2, 5		-98		
	Config 3, 6		-98		
Propagation condition			TDL-C 300ns 100Hz		

Note 1:	OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8:	The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.1.5.1-1.
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is specified in clause A.3.6.1.1..

Table A.4.5.1.5.1-3A: Measurement gap configuration for FR1 CSI-RS out-of-sync radio link monitoring in non-DRX mode

Field	Test 1
	Value
gapOffset	0
Note 1: E-UTRAN PCell and PSCell are SFN-synchronous and frame boundary aligned.	

Table A.4.5.1.5.1-4: Void

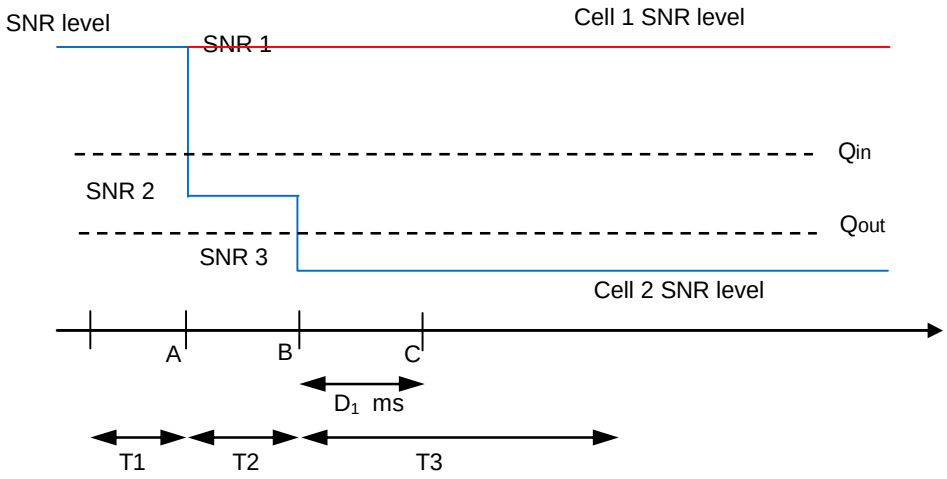

Figure A.4.5.1.5.1-1: SNR variation for CSI-RS out-of-sync testing

A.4.5.1.5.2 Test Requirements

The UE behaviour during time durations T1, T2, and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 2 (PSCell) at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 2.

The UE shall stop transmitting uplink signal in Cell 2 (PSCell) no later than time point C (D_1 after the start of the time duration T3) on the PSCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.1.6 EN-DC Radio Link Monitoring In-sync Test for FR1 PSCell configured with CSI-RS-based RLM in non-DRX mode

A.4.5.1.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PSCell when no DRX is used. This test will partly verify the FR1 PSCell CSI-RS In-sync radio link monitoring requirements in clause 8.1.

The test parameters are given in Tables A.4.5.1.6.1-1, A.4.5.1.6.1-2, and A.4.5.1.6.1-3 below. There are two cells, cell 1which is the E-UTRAN PCell, and cell 2 is the PSCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.4.5.1.6.1-1 shows the variation of the downlink SNR in the PSCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. In the test, DRX configuration is not enabled. In the test, SSB0 is configured as the BFD-RS.

Table A.4.5.1.6.1-1: Supported test configurations for FR1 PSCell

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.4.5.1.6.1-2: General test parameters for FR1 PSCell for CSI-RS in-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active E-UTRA PCell			Cell 1
E-UTRA RF Channel Number			1
Active PSCell			Cell 2
RF Channel Number			2
Duplex mode	Config 1, 4		FDD
	Config 2, 3, 5, 6		TDD
TDD Configuration	Config 1, 4		Not Applicable
	Config 2, 5		TDDConf.1.1
	Config 3, 6		TDDConf.2.1
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1
RMC CORESET Reference	Config 1, 4		CCR.1.1 FDD

Channel		Config 2, 5		CCR.1.1 TDD
		Config 3, 6		CCR.2.1 TDD
SSB Configuration		Config 1, 4		SSB.1 FR1
		Config 2, 5		SSB.1 FR1
		Config 3, 6		SSB.2 FR1
SMTC Configuration		Config 1, 2, 4, 5		SMTC.1
		Config 3, 6		SMTC.1
PDSCH/PDCCH subcarrier spacing		Config 1, 2, 4, 5		15 KHz
		Config 3, 6		30 KHz
TRS configuration		Config 1, 4		TRS.1.1 FDD
		Config 2, 5		TRS.1.1 TDD
		Config 3, 6		TRS.1.2 TDD
CSI-RS for RLM		Config 1, 4		Resource #4 in TRS.1.1 FDD
		Config 2, 5		Resource #4 in TRS.1.1 TDD
		Config 3, 6		Resource #4 in TRS.1.2 TDD
TCI configuration for PDCCH/PDSCH				TCI.State. 2
OCNG parameters				OP.1
CP length				Normal
Correlation Matrix and Antenna Configuration				2x2 Low
Out of sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy		dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy		dB	4
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
In sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	4
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy		dB	0
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy		dB	0
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
DRX				OFF
Gap pattern ID				N.A.
Layer 3 filtering				Enabled
T310 timer			ms	1000
T311 timer			ms	1000
N310				1
N311				1
CSI-RS for reporting		Config 1, 4		CSI-RS.1.1 FDD
		Config 2, 5		CSI-RS.1.1 TDD
		Config 3, 6		CSI-RS.2.1 TDD
T1			s	0.2

T2	s	0.2
T3	s	0.44
T4	s	0.2
T5	s	0.88
T6	s	0.84
Note 1: UE-specific PDCCH is not transmitted after T1 starts. Note 2: E-UTRAN is in non-DRX mode under test.		

Table A.4.5.1.6.1-3: Cell specific test parameters for FR1 for CSI-RS in-sync radio link monitoring in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSSPDCCH_beta		dB	0				
EPRE ratio of PDCCH to PDCCH DMRSPDCCH_DMRS_beta		dB					
EPRE ratio of PBCH DMRS to SSSPBCH_beta		dB					
EPRE ratio of PSS to SSSPSS_beta		dB					
EPRE ratio of PBCH to PBCH DMRSSSS_beta		dB					
EPRE ratio of PDSCH to PDSCH DMRSPDSCH_beta		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1, 4	dB	1	-7	-15	-4.5	1
	Config 2, 5		1	-7	-15	-4.5	1
	Config 3, 6		1	-7	-15	-4.5	1
N_{oc}	Config 1, 4	dBm/15KHz	-98				
	Config 2, 5		-98				
	Config 3, 6		-98				
Propagation condition			TDL-C 300ns 100Hz				
Note 1: OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1. Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1. Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1. Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1. Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG. Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs. Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure A.4.5.1.6.1-1. Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is specified in clause A.3.6.1.1..							

Table A.4.5.1.6.1-3A: Void

Table A.4.5.1.6.1-4: Void

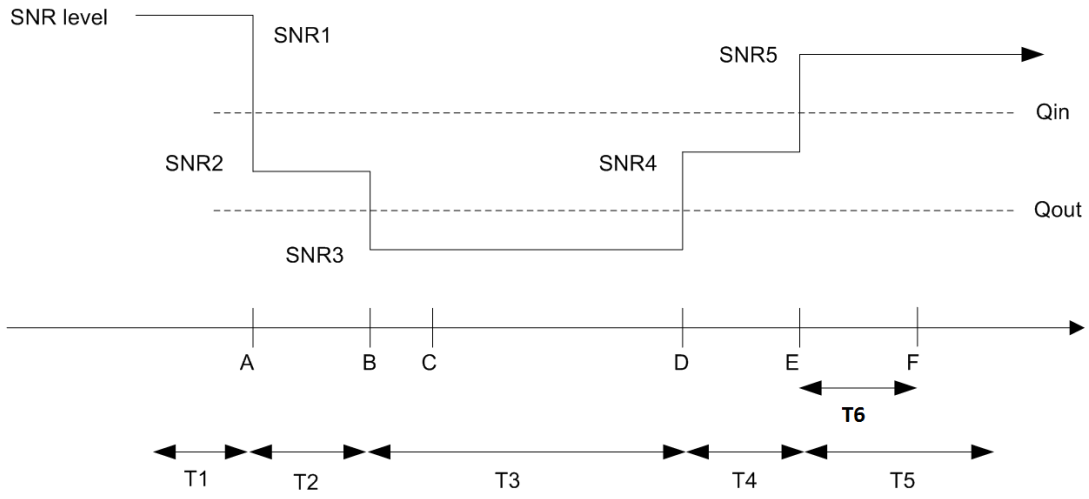

Figure A.4.5.1.6.1-1: SNR variation for CSI-RS in-sync testing

A.4.5.1.6.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (T6 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting on the PSCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.1.7 EN-DC Radio Link Monitoring Out-of-sync Test for FR1 PSCell configured with CSI-RS-based RLM in DRX mode

A.4.5.1.7.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PSCell when no DRX is used. This test will partly verify the FR1 PSCell CSI-RS Out-of-sync radio link monitoring requirements in clause 8.1.

The test parameters are given in Tables A.4.5.1.7.1-1, A.4.5.1.7.1-2, and A.4.5.1.7.1-3 below. There are two cells, cell 1 is the E-UTRAN PCell, and cell 2 is the PSCell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.4.5.1.7.1-1 shows the variation of the downlink SNR in the E-UTRAN PCell and the PSCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. In the test, DRX configuration is enabled in PSCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test. In the test, SSB0 is configured as the BFD-RS.

Table A.4.5.1.7.1-1: Supported test configurations for FR1 PSCell

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode

3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.4.5.1.7.1-2: General test parameters for FR1 PSCell for CSI-RS out-of-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active E-UTRA PCell			Cell 1
E-UTRA RF Channel Number			1
Active PSCell			Cell 2
RF Channel Number			2
Duplex mode	Config 1, 4		FDD
	Config 2, 3, 5, 6		TDD
TDD Configuration	Config 1, 4		Not Applicable
	Config 2, 5		TDDConf.1.1
	Config 3, 6		TDDConf.2.1
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1
RMC CORESET Reference Channel	Config 1, 4		CCR.1.1 FDD
	Config 2, 5		CCR.1.1 TDD
	Config 3, 6		CCR.2.1 TDD
SSB Configuration	Config 1, 4		SSB.1 FR1
	Config 2, 5		SSB.1 FR1
	Config 3, 6		SSB.2 FR1
SMTC Configuration	Config 1, 2, 4, 5		SMTC.1
	Config 3, 6		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4, 5		15 KHz
	Config 3, 6		30 KHz
TRS configuration	Config 1, 4		TRS.1.1 FDD
	Config 2, 5		TRS.1.1 TDD
	Config 3, 6		TRS.1.2 TDD
CSI-RS for RLM	Config 1, 4		Resource #4 in TRS.1.1 FDD
	Config 2, 5		Resource #4 in TRS.1.1 TDD
	Config 3, 6		Resource #4 in TRS.1.2 TDD
TCI configuration for PDCCH/PDSCH			TCI.State. 2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8

	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			DRX.3
Gap pattern ID			N.A.
Layer 3 filtering			Enabled
T310 timer		ms	0
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for reporting	Config 1, 4		CSI-RS.1.1 FDD
	Config 2, 5		CSI-RS.1.1 TDD
	Config 3, 6		CSI-RS.2.1 TDD
T1		s	0.2
T2		s	1.28
T3		s	1.28
D1		s	1.24
Note 1: UE-specific PDCCH is not transmitted after T1 starts. Note 2: E-UTRAN is in non-DRX mode under test.			

Table A.4.5.1.7.1-3: Cell specific test parameters for FR1 for CSI-RS out-of-sync radio link monitoring in DRX mode

Parameter		Unit	Test 1		
			T1	T2	T3
EPRE ratio of PDCCH DMRS to SSSPDCCH_beta		dB	4		
EPRE ratio of PDCCH to PDCCH DMRSPDCCH_DMRS_beta		dB			
EPRE ratio of PBCH DMRS to SSSPBCH_beta		dB	0		
EPRE ratio of PBCH to PBCH DMRSPSS_beta		dB			
EPRE ratio of PBCH to PBCH DMRSSSS_beta		dB			
EPRE ratio of PDSCH DMRS to SSS PDSCH_beta		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMR		dB			
SNR on RLM-RS	Config 1, 4	dB	1	-7	-15
	Config 2, 5		1	-7	-15
	Config 3, 6		1	-7	-15

N_{oc}	Config 1, 4	dBm/15KHz	-98
	Config 2, 5		-98
	Config 3, 6		-98
Propagation condition			TDL-C 300ns 100Hz

Note 1: OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.1.7.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is specified in clause A.3.6.1.1..

Table A.4.5.1.7.1-3A: Void

Table A.4.5.1.7.1-4: Void

Table A.4.5.1.7.1-5: Void

Table A.4.5.1.7.1-6: Void

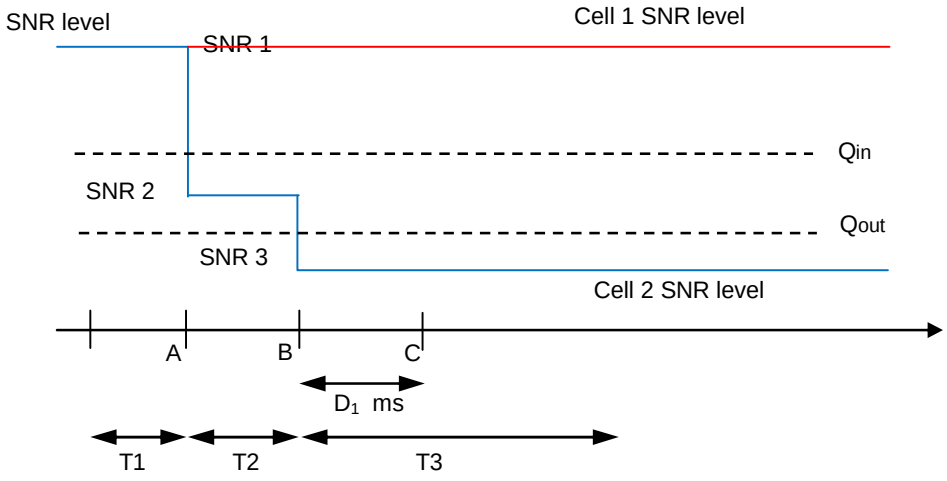

Figure A.4.5.1.7.1-1: SNR variation for CSI-RS out-of-sync testing

A.4.5.1.7.2 Test Requirements

The UE behaviour during time durations T1, T2, and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 2 (PSCell) at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 2.

The UE shall stop transmitting uplink signal in Cell 2 (PSCell) no later than time point C (D_1 after the start of the time duration T3) on the PSCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.1.8 EN-DC Radio Link Monitoring In-sync Test for FR1 PSCell configured with CSI-RS-based RLM in DRX mode

A.4.5.1.8.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PSCell when no DRX is used. This test will partly verify the FR1 PSCell CSI-RS In-sync radio link monitoring requirements in clause 8.1.

The test parameters are given in Tables A.4.5.1.8.1-1, A.4.5.1.8.1-2, A.4.5.1.8.1-3 and A.4.5.1.8.1-3A below. There are two cells, cell 1which is the E-UTRAN PCell, and cell 2 is the NR PSCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.4.5.1.8.1-1 shows the variation of the downlink SNR in the PSCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity defined in CSI-RS configuration. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms). In the test, SSB0 is configured as the BFD-RS.

Table A.4.5.1.8.1-1: Supported test configurations for FR1 PSCell

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.4.5.1.8.1-2: General test parameters for FR1 PSCell for CSI-RS in-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active E-UTRA PCell			Cell 1
E-UTRA RF Channel Number			1
Active PSCell			Cell 2
RF Channel Number			2
Duplex mode	Config 1, 4		FDD
	Config 2, 3, 5, 6		TDD
TDD Configuration	Config 1, 4		Not Applicable
	Config 2, 5		TDDConf.1.1
	Config 3, 6		TDDConf.2.1
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1

UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1
RMC CORESET Reference Channel	Config 1, 4		CCR.1.1 FDD
	Config 2, 5		CCR.1.1 TDD
	Config 3, 6		CCR.2.1 TDD
SSB Configuration	Config 1, 4		SSB.1 FR1
	Config 2, 5		SSB.1 FR1
	Config 3, 6		SSB.2 FR1
SMTC Configuration	Config 1, 2, 4, 5		SMTC.1
	Config 3, 6		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4, 5		15 KHz
	Config 3, 6		30 KHz
TRS configuration	Config 1, 4		TRS.1.1 FDD
	Config 2, 5		TRS.1.1 TDD
	Config 3, 6		TRS.1.2 TDD
CSI-RS for RLM	Config 1, 4		Resource #4 in TRS.1.1 FDD
	Config 2, 5		Resource #4 in TRS.1.1 TDD
	Config 3, 6		Resource #4 in TRS.1.2 TDD
TCI configuration for PDCCH/PDSCH			TCI.State. 2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			DRX.3
Gap pattern ID			gp0

Layer 3 filtering			Enabled
T310 timer		ms	2000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for reporting	Config 1, 4		CSI-RS.1.1 FDD
	Config 2, 5		CSI-RS.1.1 TDD
	Config 3, 6		CSI-RS.2.1 TDD
T1		s	0.2
T2		s	0.2
T3		s	1.24
T4		s	0.2
T5		s	1.88
T6		s	1.84
Note 1: UE-specific PDCCH is not transmitted after T1 starts. Note 2: E-UTRAN is in non-DRX mode under test.			

Table A.4.5.1.8.1-3: Cell specific test parameters for FR1 for CSI-RS in-sync radio link monitoring in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSSPDCCH_beta		dB	0				
EPRE ratio of PDCCH to PDCCH DMRSPDCCH_DMRS_beta		dB					
EPRE ratio of PBCH DMRS to SSSPBCH_beta		dB	0				
EPRE ratio of PBCH to PBCH DMRSPSS_beta		dB					
EPRE ratio of PSS to SSSSSS_beta		dB					
EPRE ratio of PDSCH DMRS to SSS PDSCH_beta		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1, 4	dB	1	-7	-15	-4.5	1
	Config 2, 5		1	-7	-15	-4.5	1
	Config 3, 6		1	-7	-15	-4.5	1
N_{oc}	Config 1, 4	dBm/15KHz	-98				
	Config 2, 5		-98				
	Config 3, 6		-98				
Propagation condition			TDL-C 300ns 100Hz				

Note 1:	OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure A.4.5.1.8.1-1.
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is specified in clause A.3.6.1.1.

Table A.4.5.1.8.1-3A: Measurement gap configuration for FR1 CSI-RS in-sync radio link monitoring in DRX mode

Field	Test 1
	Value
gapOffset	0
Note 1: E-UTRAN PCell and PSCell are SFN-synchronous and frame boundary aligned.	

Table A.4.5.1.8.1-4: Void

Table A.4.5.1.8.1-5: Void

Table A.4.5.1.8.1-6: Void

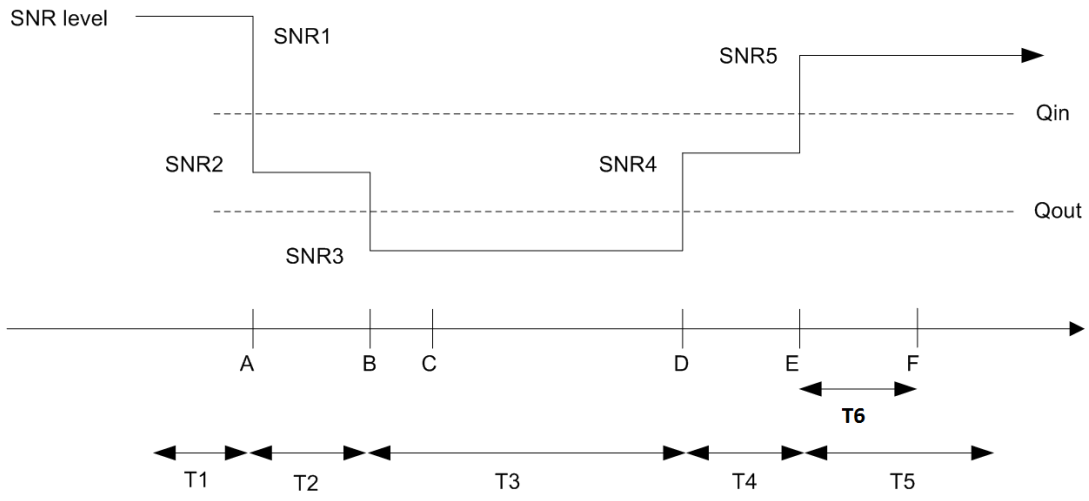

Figure A.4.5.1.8.1-1: SNR variation for CSI-RS in-sync testing

A.4.5.1.8.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (T6 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting on the PSCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.1.9 Radio Link Monitoring Out-of-sync Test for FR1 PSCell configured with SSB-based RLM RS for UE fulfilling relaxed measurement criterion

A.4.5.1.9.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PSCell when DRX is used. This test will partly verify the FR1 radio link monitoring requirements specified in clause 8.1.2.4 for UE fulfilling good serving cell quality criterion and low mobility criterion, if configured.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0, and *purpose* set to '*rlf*'. Supported test configurations are shown in table A.4.5.1.9.1-1. The test parameters are given in Tables A.4.5.1.9.1-2 and A.4.5.1.9.1-3. There are two cells, Cell 1 is the E-UTRAN PCell, and Cell 2 is the PSCell, in the test. The E-UTRAN PCell setting refers to Table A.3.7.2.1-1. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.4.5.1.9.1-1 shows the variation of the downlink SNR in the active Cell 2 to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and Cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

Table A.4.5.1.9.1-1: Supported test configurations for FR1 PSCell

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.4.5.1.9.1-2: General test parameters for FR1 out-of-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active E-UTRA PCell			Cell 1
E-UTRA RF Channel Number			1
Active PSCell			Cell 2
RF Channel Number			2
Duplex mode	Config 1, 4		FDD
	Config 2, 3, 5, 6		TDD
BWchannel	Config 1, 4	MHz	10: NRB,c = 52
	Config 2, 5		10: NRB,c = 52
	Config 3, 6		40: NRB,c = 106

DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1
TDD Configuration	Config 1, 4		Not Applicable
	Config 2, 5		TDDConf.1.1
	Config 3, 6		TDDConf.2.1
CORESET Reference Channel	Config 1, 4		CR.1.1 FDD
	Config 2, 5		CR.1.1 TDD
	Config 3, 6		CR.2.1 TDD
SSB Configuration	Config 1, 4		SSB.1 FR1
	Config 2, 5		SSB.1 FR1
	Config 3, 6		SSB.2 FR1
SMTC Configuration	Config 1, 2, 4, 5		SMTC.1
	Config 3, 6		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4, 5		15 kHz
	Config 3, 6		30 kHz
PRACH Configuration	Config 1, 2, 4, 5		Table A.3.8.2.1-1
	Config 3, 6		Table A.3.8.2.1-1
SSB index assigned as RLM RS			0
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX Configuration			DRX.3
Gap pattern ID			N.A.
Layer 3 filtering			Enabled
T310 timer		ms	0
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD
	Config 2, 5		CSI-RS.1.1 TDD
	Config 3, 6		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1, 4		TRS.1.1 FDD
	Config 2, 5		TRS.1.1 TDD

	Config 3, 6		TRS.1.2 TDD
T1		s	5.2
T2		s	0.68
T3		s	2.48
D1		s	2.44
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts. Note 3: E-UTRAN is in non-DRX mode under test.			

Table A.4.5.1.91-3: Cell specific test parameters for FR1 (Cell 2) for out-of-sync radio link monitoring tests in DRX mode

Parameter		Unit	Test 1		
			T1	T2	T3
EPRE ratio of PDCCH DMRS to SSS		dB	4		
EPRE ratio of PDCCH to PDCCH DMRS		dB	0		
EPRE ratio of PBCH DMRS to SSS		dB	0		
EPRE ratio of PBCH to PBCH DMRS		dB			
EPRE ratio of PSS to SSS		dB			
EPRE ratio of PDSCH DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1, 4	dB	1	1	-15
	Config 2, 5		1	1	-15
	Config 3, 6		1	1	-15
N_{oc}	Config 1, 4	dBm/15kHz	-98		
	Config 2, 5		-98		
	Config 3, 6		-98		
N_{oc}	Config 1, 4	dBm/SCS	-98		
	Config 2, 5		-98		
	Config 3, 6		-95		
goodServingCellEvaluationRLM			configured		
offset in goodServingCellEvaluationRLM		dB	Not configured		
goodServingCellEvaluationRLM		dB	0		
s-SearchDeltaP-Connected		dB	3		
t-SearchDeltaP-Connected		s	5		
Propagation condition			TDL-C 300ns 100Hz		
Note 1: OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG. Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs. Note 4: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in Figure A.4.5.1.9.1-1. Note 5: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6.					

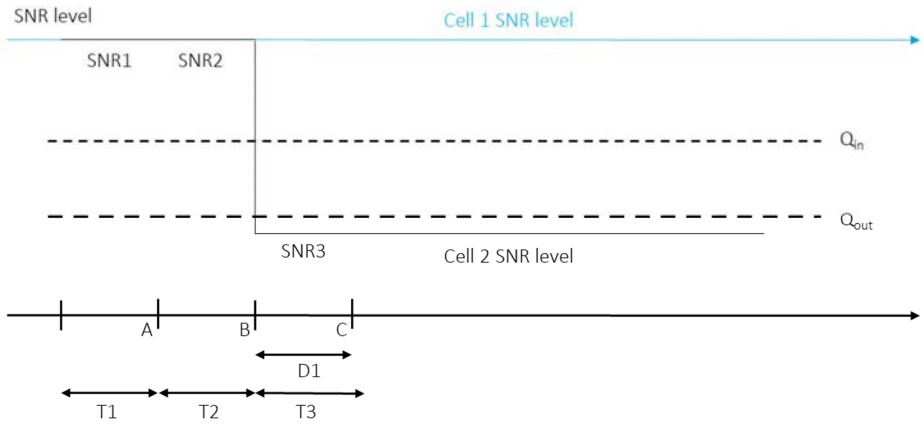

Figure A.4.5.1.9.1-1: SNR variation for out-of-sync testing

A.4.5.1.9.2 Test Requirements

The UE behaviour in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal in Cell 2 no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.2 Interruption

A.4.5.2.1 E-UTRAN – NR FR1 interruptions at transitions between active and non-active during DRX in synchronous EN-DC

A.4.5.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that when LTE PCell is in DRX and NR PSCell is in non-DRX, NR PSCell interruptions due to transitions from active to non-active and from non-active to active during LTE PCell DRX the UE missed ACK/NACK does not exceed the limits. This test will verify the missed ACK/NACK rate for NR PSCell in EN-DC specified in TS38.133 clause 8. 2.1.2. Supported test configurations are shown in table A.4.5.2.1.1-1.

The general test parameters and NR cell specific test parameters are given in Table A.4.5.2.1.1-2 and A.4.5.2.1.1-3. The E-UTRAN PCell DRX configuration parameters are given in Table A.4.5.2.1.1-4 below. And the E-UTRAN cell specific test parameters can refer to Table A.3.7.2.1-1. In the test there are two cells: Cell1 and Cell2. Cell1 is LTE PCell and Cell2 is NR FR1 PSCell. The test consists of one time period, with duration of T1. During T1, NR PSCell is continuously scheduled in DL while LTE PCell is not scheduled and has DRX configured. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell1 and Cell2. Cell1 shall be configured as LTE PCell and Cell2 shall be configured as NR PSCell. Prior to start of T1 the DRX inactivity timer for the LTE PCell has already expired. During T1 the UE shall be continuously scheduled on NR PSCell while not scheduled on LTE PCell. CORESET indicating a new transmission on PSCell shall be sent continuously during the entire time duration to ensure UE would not enter DRX state on PSCell.

Table A.4.5.2.1.1-1: Interruption at transitions between active and non-active during DRX supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.4.5.2.1.1-2: General test parameters for E-UTRAN – NR FR1 interruptions at transitions between active and non-active during DRX in synchronous EN-DC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2	One is E-UTRAN RF channel and the other is NR RF channel
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Configured PSCell		Cell2	PSCell on NR RF channel number 2.
CP length		Normal	Applicable to Cell1 and Cell2
DRX		DRX.4	DRX related parameters are defined in Table A.3.3.4-1
Measurement gap pattern Id		OFF	
T1	s	10	

Table A.4.5.2.1.1-3: NR cell specific test parameters for E-UTRAN – NR FR1 interruptions at transitions between active and non-active during DRX in synchronous EN-DC

Parameter		Unit	Cell2
Frequency Range			FR1
Duplex mode	Config 1,4		FDD
	Config 2,3,5,6		TDD
TDD configuration	Config 1,4		Not Applicable
	Config 2,5		TDDConf.1.1
	Config 3,6		TDDConf.2.1
$BW_{channel}$	Config 1,4		10: $N_{RB,c}$ = 52
	Config 2,5		10: $N_{RB,c}$ = 52
	Config 3,6		40: $N_{RB,c}$ = 106
Initial DL BWP Configuration	Config 1,4		DLBWP.0.1
	Config 2,5		DLBWP.0.1
	Config 3,6		DLBWP.0.1
Dedicated DL BWP Configuration	Config 1,4		DLBWP.1.1
	Config 2,5		DLBWP.1.1
	Config 3,6		DLBWP.1.1
Initial UL BWP Configuration	Config 1,4		ULBWP.0.1
	Config 2,5		ULBWP.0.1
	Config 3,6		ULBWP.0.1
Dedicated UL BWP Configuration	Config 1,4		ULBWP.1.1
	Config 2,5		ULBWP.1.1
	Config 3,6		ULBWP.1.1
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2,5		SR.1.1 TDD
	Config 3,6		SR.2.1 TDD

RMSI CORESET parameters	Config 1,4		CR.1.1 FDD
	Config 2,5		CR.1.1 TDD
	Config 3,6		CR.2.1 TDD
PDCCH CORESET parameters	Config 1,4		CCR.1.1 FDD
	Config 2,5		CCR.1.1 TDD
	Config 3,6		CCR.2.1 TDD
OCNG Patterns			OP.1
SMTC Configuration			SMTC.1
TRS configuration	Config 1,4		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
SSB Configuration	Config 1,2,4,5		SSB.1 FR1
	Config 3,6		SSB.2 FR1
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS (Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note 2		dBm/15 kHz	-104
SS-RSRP Note 3		dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	Config 1,2,4,5	dBm/9.36MHz	-58.96
	Config 3,6	dBm/38.16MHz	-52.86
Time offset to Cell1 Note 4		µs	33
Propagation Condition			AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modeled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselvess.

Note 4: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell at the UE antenna connector including time alignment error between the two cells

Table A.4.5.2.1.1-4: Void

A.4.5.2.1.2 Test Requirements

The UE shall be continuously scheduled in NR PSCell during the entire length of T1. UE shall not be scheduled in LTE PCell during T1. During the time duration T1 the UE shall transmit at least 99% of ACK/NACK on NR PSCell.

Interruption on NR PSCell shall not exceed X as defined in Table A.4.5.2.1.2-1.

Table A.4.5.2.1.2-1: Interruption length X at transition between active and non-active during DRX

μ	NR Slot length (ms)	Interruption length X
		Sync

0	1	1
1	0.5	1

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.2.2 E-UTRAN – NR FR1 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC

A.4.5.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that when LTE PCell is in DRX and NR PSCell is in non-DRX, NR PSCell interruptions due to transitions from active to non-active and from non-active to active during LTE PCell DRX the UE missed ACK/NACK does not exceed the limits. This test will verify the missed ACK/NACK rate for NR PSCell in EN-DC specified in TS 38.133 clause 8.2.1.2. Supported test configurations are shown in table A.4.5.2.2.1-1.

The general test parameters and NR cell specific test parameters are given in Table A.4.5.2.2.1-2 and A.4.5.2.2.1-3. The E-UTRAN PCell DRX configuration parameters are given in Table A.4.5.2.2.1-4 below. And the E-UTRAN cell specific test parameters can refer to Table A.3.7.2.1-1. In the test there are two cells: Cell1 and Cell2. Cell1 is LTE PCell and Cell2 is NR FR1 PSCell. The test consists of one time period, with duration of T1. During T1, NR PSCell is continuously scheduled in DL while LTE PCell is not scheduled and has DRX configured. Prior to the start of the time duration T1, Cell1 shall be configured as LTE PCell and Cell2 shall be configured as NR PSCell. Prior to start of T1 the DRX inactivity timer for the LTE PCell has already expired. During T1 the UE shall be continuously scheduled on NR PSCell while not scheduled on LTE PCell. PDCCH indicating a new transmission on PSCell shall be sent continuously during the entire time duration to ensure UE would not enter DRX state on PSCell.

Table A.4.5.2.2.1-1: Interruption at transitions between active and non-active during DRX supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.4.5.2.2.1-2: General test parameters for E-UTRAN – NR FR1 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2	One is E-UTRAN RF channel and the other is NR RF channel
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Configured PSCell		Cell2	PSCell on NR RF channel number 2.
CP length		Normal	Applicable to Cell1 and Cell2
DRX		DRX.4	DRX related parameters are defined in Table A.3.3.4-1
Measurement gap pattern Id		OFF	
T1	s	10	

Table A.4.5.2.2.1-3: NR cell specific test parameters for E-UTRAN – NR FR1 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC

Parameter		Unit	Cell2
Frequency Range			FR1
Duplex mode	Config 1,4		FDD
	Config 2,3,5,6		TDD
TDD configuration	Config 1,4		Not Applicable
	Config 2,5		TDDConf.1.1
	Config 3,6		TDDConf.2.1
$BW_{channel}$	Config 1,4		10: $N_{RB,c}$ = 52
	Config 2,5		10: $N_{RB,c}$ = 52
	Config 3,6		40: $N_{RB,c}$ = 106
Initial DL BWP Configuration	Config 1,4		DLBWP.0.1
	Config 2,5		DLBWP.0.1
	Config 3,6		DLBWP.0.1
Dedicated DL BWP Configuration	Config 1,4		DLBWP.1.1
	Config 2,5		DLBWP.1.1
	Config 3,6		DLBWP.1.1
Initial UL BWP Configuration	Config 1,4		ULBWP.0.1
	Config 2,5		ULBWP.0.1
	Config 3,6		ULBWP.0.1
Dedicated UL BWP Configuration	Config 1,4		ULBWP.1.1
	Config 2,5		ULBWP.1.1
	Config 3,6		ULBWP.1.1
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2,5		SR.1.1 TDD
	Config 3,6		SR.2.1 TDD
RMSI CORESET parameters	Config 1,4		CR.1.1 FDD
	Config 2,5		CR.1.1 TDD
	Config 3,6		CR.2.1 TDD
PDCCH CORESET parameters	Config 1,4		CCR.1.1 FDD
	Config 2,5		CCR.1.1 TDD
	Config 3,6		CCR.2.1 TDD
OCNG Patterns			OP.1
SMTC Configuration			SMTC.1
TRS configuration	Config 1,4		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
SSB Configuration	Config 1,2,4,5		SSB.1 FR1
	Config 3,6		SSB.2 FR1
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note 2		dBm/15 kHz	-104
SS-RSRP Note 3		dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	Config 1,2,4,5	dBm/9.36MHz	-58.96

	Config 3,6	dBm/38.16MHz	-52.86
Time offset to Cell1 Note 4		µs	500
Propagation Condition			AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modeled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselvess.
Note 4: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell at the UE antenna connector including time alignment error between the two cells

Table A.4.5.2.2.1-4: Void

A.4.5.2.2.2 Test Requirements

The UE shall be continuously scheduled in NR PSCell during the entire length of T1. UE shall not be scheduled in LTE PCell during T1. During the time duration T1 the UE shall transmit at least 99% of ACK/NACK on NR PSCell.

Interruption on NR PSCell shall not exceed X as defined in Table A.4.5.2.2.2-1.

Table A.4.5.2.2.2-1: Interruption length X at transition between active and non-active during DRX

μ	NR Slot length (ms)	Interruption length X
		Async
0	1	2
1	0.5	2

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.2.3 E-UTRAN – NR FR1 interruptions during measurements on deactivated NR SCC in synchronous EN-DC

A.4.5.2.3.1 Test Purpose and Environment

The purpose of this test is to verify E-UTRAN PCell and NR PSCell interruptions during the measurement on the deactivated NR SCC, the UE missed ACK/NACK does not exceed the limits. This test will verify the missed ACK/NACK rate for E-UTRAN PCell and NR PSCell in EN-DC specified in TS 38.133 clause 8.2.1.2. Supported test configurations for LTE PCell and NR PSCell are shown in table A.4.5.2.3.1-1. Supported test configurations for NR SCell are shown in table A.4.5.2.3.1-1A. Test configuration for LTE PCell and NR PSCell and test configuration for NR SCell are chosen independently.

The general test parameters and NR cell specific test parameters are given in Table A.4.5.2.3.1-2, A.4.5.2.3.1-3 and A.4.5.2.3.1-4 below. And the E-UTRAN cell specific test parameters can refer to Table A.3.7.2.1-1. In the test there are three cells: Cell1, Cell2 and Cell3. Cell1 is LTE PCell, Cell2 and Cell3 is NR PSCell and NR deactivated SCell. Cell1 shall be configured as LTE PCell and Cell2 shall be configured as NR PSCell. The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, the UE is connected to Cell1 and Cell2 and the RRC message including *measCycleSCell* or *allowInterruptions* for the deactivated NR SCells is received at the UE antenna connector. During T1, LTE PCell and NR PSCell are continuously scheduled in DL

Table A.4.5.2.3.1-1: Interruptions during measurements on deactivated NR SCC supported test configurations for LTE PCell and NR PSCell

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration,	

Table A.4.5.2.3.1-1A: Interruptions during measurements on deactivated NR SCC supported test configurations for NR SCell

$Config_{SCell}$	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration	

Table A.4.5.2.3.1-2: General test parameters for E-UTRAN – NR interruptions during measurements on deactivated NR SCC in synchronous EN-DC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2, 3	One is E-UTRAN RF channel and the other two are NR RF channels
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Active PSCell		Cell2	PSCell on NR RF channel number 2.
Configured deactivated SCell		Cell3	Deactivated SCell on NR RF channel number 3.
CP length		Normal	Applicable to Cell1, Cell2 and Cell3
DRX		OFF	
Measurement gap pattern Id		OFF	
SCell measurement cycle (measCycleSCell)	ms	640	
T1	s	10	

Table A.4.5.2.3.1-3: NR cell specific test parameters for NR PSCell for E-UTRAN – NR interruptions during measurements on deactivated NR SCC in synchronous EN-DC

Parameter		Unit	Cell2
Frequency Range			FR1
Duplex mode	Config 1,4		FDD
	Config 2,3,5,6		TDD
TDD configuration	Config 1,4		Not Applicable
	Config 2,5		TDDConf.1.1
	Config 3,6		TDDConf.2.1
$BW_{channel}$	Config 1,4		Note 8

	Config 2,5		Note 8
	Config 3,6		Note 8
$BW_{occupied}$	Config 1,4	RB	52 Note 6
	Config 2,5		52 Note 6
	Config 3,6		106 Note 7
Initial DL BWP Configuration	Config 1,4		DLBWP.0.1
	Config 2,5		DLBWP.0.1
	Config 3,6		DLBWP.0.1
Dedicated DL BWP Configuration	Config 1,4		DLBWP.1.1
	Config 2,5		DLBWP.1.1
	Config 3,6		DLBWP.1.1
Initial UL BWP Configuration	Config 1,4		ULBWP.0.1
	Config 2,5		ULBWP.0.1
	Config 3,6		ULBWP.0.1
Dedicated UL BWP Configuration	Config 1,4		ULBWP.1.1
	Config 2,5		ULBWP.1.1
	Config 3,6		ULBWP.1.1
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2,5		SR.1.1 TDD
	Config 3,6		SR.2.1 TDD
RMSI CORESET parameters	Config 1,4		CR.1.1 FDD
	Config 2,5		CR.1.1 TDD
	Config 3,6		CR.2.1 TDD
PDCCH CORESET parameters	Config 1,4		CCR.1.1 FDD
	Config 2,5		CCR.1.1 TDD
	Config 3,6		CCR.2.1 TDD
TRS configuration	Config 1,4		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
OCNG Patterns	Config 1,2,4,5		OP.1 Note 6
	Config 3,6		OP.1 Note 7
SMTC Configuration			SMTC.1
TCI state			TCI.State.0
SSB Configuration	Config 1,2,4,5		SSB.1 FR1
	Config 3,6		SSB.2 FR1
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} Note 2		dBm/15 kHz	-104
SS-RSRP Note 3		dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17

Io[Note3]	Config 1,2,4,5	dBm/ 9.36MHz	-58.96
	Config 3,6	dBm/ 38.16MHz	-52.86
Time offset to Cell1 [Note 4]		µs	3 for intra-band EN-DC, 33 for inter-band EN-DC
Time offset to Cell2 [Note 5]		µs	-
Propagation Condition			AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modeled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselvess.
Note 4: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell at the UE antenna connector including time alignment error between the two cells
Note 5: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.
Note 6: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 7: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 8: $N_{RB,c}$. is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.

Table A.4.5.2.3.1-4: NR cell specific test parameters for NR SCell for E-UTRAN – NR interruptions during measurements on deactivated NR SCC in synchronous EN-DC

Parameter		Unit	Cell3
Frequency Range			FR1
Duplex mode	$Config_{SCell}$ 1		FDD
	$Config_{SCell}$ 2,3		TDD
TDD configuration	$Config_{SCell}$ 1		Not Applicable
	$Config_{SCell}$ 2		TDDConf.1.1
	$Config_{SCell}$ 3		TDDConf.2.1
$BW_{channel}$	$Config_{SCell}$ 1		Note 8
	$Config_{SCell}$ 2		Note 8
	$Config_{SCell}$ 3		Note 8
$BW_{occupied}$	$Config_{SCell}$ 1	RB	52 [Note 6]
	$Config_{SCell}$ 2		52 [Note 6]
	$Config_{SCell}$ 3		106 [Note 7]
Initial DL BWP Configuration	$Config_{SCell}$ 1		DLBWP.0.1
	$Config_{SCell}$ 2		DLBWP.0.1
	$Config_{SCell}$ 3		DLBWP.0.1
Dedicated DL BWP Configuration	$Config_{SCell}$ 1		DLBWP.1.1
	$Config_{SCell}$ 2		DLBWP.1.1
	$Config_{SCell}$ 3		DLBWP.1.1
Initial UL BWP Configuration	$Config_{SCell}$ 1		ULBWP.0.1
	$Config_{SCell}$ 2		ULBWP.0.1
	$Config_{SCell}$ 3		ULBWP.0.1

Dedicated UL BWP Configuration	$Config_{SCell}$ 1		ULBWP.1.1
	$Config_{SCell}$ 2		ULBWP.1.1
	$Config_{SCell}$ 3		ULBWP.1.1
PDSCH Reference measurement channel	$Config_{SCell}$ 1		-
	$Config_{SCell}$ 2		-
	$Config_{SCell}$ 3		-
RMSI CORESET parameters	$Config_{SCell}$ 1		CR.1.1 FDD
	$Config_{SCell}$ 2		CR.1.1 TDD
	$Config_{SCell}$ 3		CR.2.1 TDD
PDCCH CORESET parameters	$Config_{SCell}$ 1		CCR.1.1 FDD
	$Config_{SCell}$ 2		CCR.1.1 TDD
	$Config_{SCell}$ 3		CCR.2.1 TDD
TRS configuration	$Config_{SCell}$ 1		TRS.1.1 FDD
	$Config_{SCell}$ 2		TRS.1.1 TDD
	$Config_{SCell}$ 3		TRS.1.2 TDD
OCNG Patterns	$Config_{SCell}$ 1,2		OP.1 Note 6
	$Config_{SCell}$ 3		OP.1 Note 7
SMTC Configuration			SMTC.1
TCI state			TCI.State.0
SSB Configuration	$Config_{SCell}$ 1,2		SSB.1 FR1
	$Config_{SCell}$ 3		SSB.2 FR1
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} Note 2		dBm/15 kHz	-104
SS-RSRP Note 3		dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	$Config_{SCell}$ 1,2	dBm/9.36MHz	-58.96
	$Config_{SCell}$ 3	dBm/38.16MHz	-52.86
Time offset to Cell1 Note 4		µs	3 + Time offset to Cell2 for intra-band EN-DC, 33 + Time offset to Cell2 for inter-band EN-DC
Time offset to Cell2 Note 5		µs	3
Propagation Condition			AWGN

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modeled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselvess.
Note 4:	Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell at the UE antenna connector including time alignment error between the two cells
Note 5:	Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.
Note 6:	All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 7:	All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 8:	$N_{RB,c}$. is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.

A.4.5.2.3.2 Test Requirements

The UE shall be continuously scheduled in LTE PCell and NR PSCell during the entire length of T1. During the time duration T1 the UE shall transmit at least 99.5% of ACK/NACK on NR PSCell.

If the NR PSCell is not in the same band as the deactivated SCell, the UE is only allowed to cause interruptions on NR PSCell immediately before and immediately after an SMTC. Each interruption on NR PSCell shall not exceed the value defined in Table A.4.5.2.3.2-1.

If the NR PSCell is in the same band as the deactivated SCell, the UE is only allowed to cause an interruption on PSCell no earlier than 1 slot before an SMTC and no later than 1 slot after the SMTC. the interruption on NR PSCell shall not exceed the value defined in Table A.4.5.2.3.2-2.

Table A.4.5.2.3.2-1: Interruption duration if the NR PSCell is not in the same band as the deactivated SCell

μ	NR Slot length (ms)	Interruption length
0	1	1
1	0.5	1

Table A.4.5.2.3.2-2: Interruption duration if the NR PSCell is in the same band as the deactivated SCell

μ	NR Slot length (ms)	Interruption length
0	1	2 + SMTC duration
1	0.5	2 + SMTC duration

For synchronous inter-band EN-DC, the UE is only allowed to cause interruptions on E-UTRA PCell immediately before and immediately after an SMTC. Each interruption on E-UTRA PCell shall not exceed 1 subframe.

For synchronous intra-band EN-DC, the UE is only allowed to cause an interruption on E-UTRA PCell no earlier than 1 subframe before an SMTC and no later than 1 subframe after the SMTC. The interruption on E-UTRA PCell shall not exceed SMTC duration + 2 subframes.

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.2.4 E-UTRAN – NR FR1 interruptions during measurements on deactivated NR SCC in asynchronous EN-DC

A.4.5.2.4.1 Test Purpose and Environment

The purpose of this test is to verify E-UTRAN PCell and NR PSCell interruptions during the measurement on the deactivated NR SCC, the UE missed ACK/NACK does not exceed the limits. This test will verify the missed ACK/NACK rate for E-UTRAN PCell and NR PSCell in EN-DC specified in TS 38.133 clause 8.2.1. Supported test configurations for LTE PCell and NR PSCell are shown in table A.4.5.2.4.1-1. Supported test configurations for NR SCell are shown in table A.4.5.2.4.1-1. Test configuration for LTE PCell and NR PSCell and test configuration for NR SCell are chosen independently.

The general test parameters and NR cell specific test parameters are given in Table A.4.5.2.4.1-2, A.4.5.2.4.1-3 and A.4.5.2.4.1-4 below. And the E-UTRAN cell specific test parameters can refer to Table A.3.7.2.1-1. In the test there are three cells: Cell1, Cell2 and Cell3. Cell1 is LTE PCell, Cell2 and Cell3 is NR PSCell and NR deactivated SCell. Cell1 shall be configured as LTE PCell and Cell2 shall be configured as NR PSCell. The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, the UE is connected to Cell1 and Cell2and the RRC message including *measCycleSCell* or *allowInterruptions* for the deactivated NR SCells is received at the UE antenna connector. During T1, LTE PCell and NR PSCell are continuously scheduled in DL.

Table A.4.5.2.4.1-1: Interruptions during measurements on deactivated NR SCC supported test configurations for LTE PCell and NR PSCell

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration,	

Table A.4.5.2.4.1-1A: Interruptions during measurements on deactivated NR SCC supported test configurations for NR SCell

$Config_{SCell}$	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration	

Table A.4.5.2.4.1-2: General test parameters for E-UTRAN – NR interruptions during measurements on deactivated NR SCC in asynchronous EN-DC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2, 3	One is E-UTRAN RF channel and the other two are NR RF channels
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Configured PSCell		Cell2	PSCell on NR RF channel number 2.

Configured deactivated SCell		Cell3	Deactivated SCell on NR RF channel number 3.
CP length		Normal	Applicable to Cell1, Cell2 and Cell3
DRX		OFF	
Measurement gap pattern Id		OFF	
SCell measurement cycle (measCycleSCell)	ms	640	
T1	s	10	

Table A.4.5.2.4.1-3: NR cell specific test parameters for NR PSCell for E-UTRAN – NR interruptions during measurements on deactivated NR SCC in asynchronous EN-DC

Parameter		Unit	Cell2
Frequency Range			FR1
Duplex mode	Config 1,4		FDD
	Config 2,3,5,6		TDD
TDD configuration	Config 1,4		Not Applicable
	Config 2,5		TDDConf.1.1
	Config 3,6		TDDConf.2.1
$BW_{channel}$	Config 1,4		Note 8
	Config 2,5		Note 8
	Config 3,6		Note 8
$BW_{occupied}$	Config 1,4	RB	52 Note 6
	Config 2,5		52 Note 6
	Config 3,6		106 Note 7
Initial BWP Configuration	Config 1,4		DLBWP.0.1
	Config 2,5		DLBWP.0.1
	Config 3,6		DLBWP.0.1
Dedicated DL BWP Configuration	Config 1,4		DLBWP.1.1
	Config 2,5		DLBWP.1.1
	Config 3,6		DLBWP.1.1
Initial UL BWP Configuration	Config 1,4		ULBWP.0.1
	Config 2,5		ULBWP.0.1
	Config 3,6		ULBWP.0.1
Dedicated UL BWP Configuration	Config 1,4		ULBWP.1.1
	Config 2,5		ULBWP.1.1
	Config 3,6		ULBWP.1.1
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2,5		SR.1.1 TDD
	Config 3,6		SR.2.1 TDD
RMSI CORESET parameters	Config 1,4		CR.1.1 FDD
	Config 2,5		CR.1.1 TDD
	Config 3,6		CR.2.1 TDD
PDCCH CORESET parameters	Config 1,4		CCR.1.1 FDD
	Config 2,5		CCR.1.1 TDD
	Config 3,6		CCR.2.1 TDD
TRS configuration	Config 1,4		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
OCNG Patterns	Config 1,2,4,5		OP.1 Note 6
	Config 3,6		OP.1 Note 7
SSB Configuration	Config 1,2,4,5		SSB.1 FR1
	Config 3,6		SSB.2 FR1
SMTC Configuration			SMTC.1
TCI state			TCI.State.0
Correlation Matrix and Antenna Configuration			1x2 Low

EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} Note 2		dBm/15 Hz	-104
SS-RSRP Note 3		dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	Config 1,2,4,5	dBm/9.36MHz	-58.96
	Config 3,6	dBm/38.16MHz	-52.86
Time offset to Cell1 Note 4	Config 1,2,4,5	µs	500
	Config 3,6		250
Time offset to Cell2 Note 5		µs	-
Propagation Condition			AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modeled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselvess.
Note 4: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell at the UE antenna connector including time alignment error between the two cells
Note 5: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.
Note 6: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 7: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 8: $N_{RB,c}$. is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.

Table A.4.5.2.4.1-4: NR cell specific test parameters for NR SCell for E-UTRAN – NR interruptions during measurements on deactivated NR SCC in asynchronous EN-DC

Parameter		Unit	Cell3
Frequency Range			FR1
Duplex mode	$Config_{SCell}$ 1		FDD
	$Config_{SCell}$ 2,3		TDD
TDD configuration	$Config_{SCell}$ 1		Not Applicable
	$Config_{SCell}$ 2		TDDConf.1.1
	$Config_{SCell}$ 3		TDDConf.2.1
$BW_{channel}$	$Config_{SCell}$ 1		Note 8
	$Config_{SCell}$ 2		Note 8
	$Config_{SCell}$ 3		Note 8
$BW_{occupied}$	$Config_{SCell}$ 1	RB	52 Note 6
	$Config_{SCell}$ 2		52 Note 6
	$Config_{SCell}$ 3		106 Note 7
Initial BWP Configuration	$Config_{SCell}$ 1		DLBWP.0.1
	$Config_{SCell}$ 2		DLBWP.0.1
	$Config_{SCell}$ 3		DLBWP.0.1
	$Config_{SCell}$ 1		DLBWP.1.1

Dedicated DL BWP Configuration	$Config_{SCell}$ 2		DLBWP.1.1
	$Config_{SCell}$ 3		DLBWP.1.1
Initial UL BWP Configuration	$Config_{SCell}$ 1		ULBWP.0.1
	$Config_{SCell}$ 2		ULBWP.0.1
	$Config_{SCell}$ 3		ULBWP.0.1
Dedicated UL BWP Configuration	$Config_{SCell}$ 1		ULBWP.1.1
	$Config_{SCell}$ 2		ULBWP.1.1
	$Config_{SCell}$ 3		ULBWP.1.1
PDSCH Reference measurement channel	$Config_{SCell}$ 1		-
	$Config_{SCell}$ 2		-
	$Config_{SCell}$ 3		-
RMSI CORESET parameters	$Config_{SCell}$ 1		CR.1.1 FDD
	$Config_{SCell}$ 2		CR.1.1 TDD
	$Config_{SCell}$ 3		CR.2.1 TDD
PDCCH CORESET parameters	$Config_{SCell}$ 1		CCR.1.1 FDD
	$Config_{SCell}$ 2		CCR.1.1 TDD
	$Config_{SCell}$ 3		CCR.2.1 TDD
TRS configuration	$Config_{SCell}$ 1		TRS.1.1 FDD
	$Config_{SCell}$ 2		TRS.1.1 TDD
	$Config_{SCell}$ 3		TRS.1.2 TDD
OCNG Patterns	$Config_{SCell}$ 1,2		OP.1 Note 6
	$Config_{SCell}$ 3		OP.1 Note 7
SSB Configuration	$Config_{SCell}$ 1,2		SSB.1 FR1
	$Config_{SCell}$ 3		SSB.2 FR1
SMTC Configuration			SMTC.1
TCI state			TCI.State.0
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} Note 2		dBm/15 kHz	-104
SS-RSRP Note 3		dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	$Config_{SCell}$ 1,2	dBm/ 9.36MHz	-58.96
	$Config_{SCell}$ 3	dBm/ 38.16MHz	-52.86
Time offset to Cell1 Note 4	$Config_{SCell}$ 1,2	µs	500 + Time offset to Cell2
	$Config_{SCell}$ 3		250 + Time offset to Cell2
Time offset to Cell2 Note 5		µs	3
Propagation Condition			AWGN

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modeled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselvess.
Note 4:	Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell at the UE antenna connector including time alignment error between the two cells
Note 5:	Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.
Note 6:	All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 7:	All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 8:	$N_{RB,c}$. is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.

A.4.5.2.4.2 Test Requirements

The UE shall be continuously scheduled in LTE PCell and NR PSCell during the entire length of T1. During the time duration T1 the UE shall transmit at least 99.5% of ACK/NACK on NR PSCell.

If the NR PSCell is not in the same band as the deactivated SCell, the UE is only allowed to cause interruptions on NR PSCell immediately before and immediately after an SMTC. Each interruption on NR PSCell shall not exceed the value defined in Table A.4.5.2.4.2-1.

If the NR PSCell is in the same band as the deactivated SCell, the UE is only allowed to cause an interruption on PSCell no earlier than 1 slot before an SMTC and no later than 1 slot after the SMTC. the interruption on NR PSCell shall not exceed the value defined in Table A.4.5.2.4.2-2.

Table A.4.5.2.4.2-1: Interruption duration if the NR PSCell is not in the same band as the deactivated SCell

μ	NR Slot length (ms)	Interruption length
0	1	1
1	0.5	1

Table A.4.5.2.4.2-2: Interruption duration if the NR PSCell is in the same band as the deactivated SCell

μ	NR Slot length (ms)	Interruption length
0	1	2 + SMTC duration
1	0.5	2 + SMTC duration

For asynchronous inter-band EN-DC, the UE is only allowed to cause interruptions on E-UTRA PCell immediately before and immediately after an SMTC. Each interruption on E-UTRA PCell shall not exceed 2 subframe.

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.2.5 E-UTRAN – NR FR1 interruptions during measurements on deactivated E-UTRAN SCC in synchronous EN-DC

A.4.5.2.5.1 Test Purpose and Environment

The purpose of this test is to verify E-UTRAN PCell and NR PSCell interruptions during the measurement on the deactivated E-UTRAN SCC, the UE missed ACK/NACK does not exceed the limits. This test will verify the missed ACK/NACK rate for E-UTRAN PCell and NR PSCell in EN-DC specified in TS38.133 clause 8. 2.1.2. Supported test configurations are shown in table A.4.5.2.5.1-1.

The general test parameters and NR cell specific test parameters are given in Table A.4.5.2.5.1-2 and A.4.5.2.5.1-3 below. And the E-UTRAN cell specific test parameters can refer to Table A.3.7.2.1-1. In the test there are three cells: Cell1, Cell2 and Cell3. Cell1 and Cell3 is E-UTRAN PCell and E-UTRAN deactivated SCell, Cell2 is NR FR1 PSCell. Cell1 shall be configured as LTE PCell and Cell2 shall be configured as NR PSCell. The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, the UE is connected to Cell1 and Cell2 and the RRC message including *measCycleSCell* or *allowInterruptions* for the deactivated E-UTRAN SCells is received at the UE antenna connector. During T1, LTE PCell and NR PSCell are continuously scheduled in DL.

Table A.4.5.2.5.1-1: Interruptions during measurements on deactivated E-UTRAN SCC supported test configurations

Config	Description
	LTE PCell + NR PSCell Note 2
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The duplex mode of the LTE SCell is determined based on the band combination to be tested.	

Table A.4.5.2.5.1-2: General test parameters for E-UTRAN – NR interruptions during measurements on deactivated E-UTRAN SCC in synchronous EN-DC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2, 3	One is NR RF channel and the other two are E-UTRAN RF channels
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Active PSCell		Cell2	PSCell on NR RF channel number 2.
Configured deactivated SCell		Cell3	Deactivated SCell on E-UTRAN RF channel number 3.
CP length		Normal	Applicable to Cell1, Cell2 and Cell3
DRX		OFF	
Measurement gap pattern Id		OFF	
SCell measurement cycle (measCycleSCell)	ms	640	
T1	s	10	

Table A.4.5.2.5.1-3: NR cell specific test parameters for E-UTRAN – NR interruptions during measurements on deactivated E-UTRAN SCC in synchronous EN-DC

Parameter		Unit	Cell2
Frequency Range			FR1
Duplex mode	Config 1,4		FDD
	Config 2,3,5,6		TDD
TDD configuration	Config 1,4		Not Applicable

	Config 2,5		TDDConf.1.1
	Config 3,6		TDDConf.2.1
$BW_{channel}$	Config 1,4	MHz	10: $N_{RB,c}$ = 52
	Config 2,5		10: $N_{RB,c}$ = 52
	Config 3,6		40: $N_{RB,c}$ = 106
Initial DL BWP Configuration	Config 1,4		DLBWP.0.1
	Config 2,5		DLBWP.0.1
	Config 3,6		DLBWP.0.1
Dedicated DL BWP Configuration	Config 1,4		DLBWP.1.1
	Config 2,5		DLBWP.1.1
	Config 3,6		DLBWP.1.1
Initial UL BWP Configuration	Config 1,4		ULBWP.0.1
	Config 2,5		ULBWP.0.1
	Config 3,6		ULBWP.0.1
Dedicated UL BWP Configuration	Config 1,4		ULBWP.1.1
	Config 2,5		ULBWP.1.1
	Config 3,6		ULBWP.1.1
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2,5		SR.1.1 TDD
	Config 3,6		SR.2.1 TDD
RMSI CORESET parameters	Config 1,4		CR.1.1 FDD
	Config 2,5		CR.1.1 TDD
	Config 3,6		CR.2.1 TDD
PDCCH CORESET parameters	Config 1,4		CCR.1.1 FDD
	Config 2,5		CCR.1.1 TDD
	Config 3,6		CCR.2.1 TDD
TRS configuration	Config 1,4		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
OCNG Patterns			OP.1
SMTC Configuration			SMTC.1
TCI state			TCI.State.0
SSB Configuration	Config 1,2,4,5		SSB.1 FR1
	Config 3,6		SSB.2 FR1
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note 2		dBm/15 kHz	-104
SS-RSRP Note 3		dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	Config 1,2,4,5	dBm/9.36MHz	-58.96
	Config 3,6	dBm/38.16MHz	-52.86
Time offset to Cell1 Note 4		µs	33
Propagation Condition			AWGN

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modeled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselvess.
Note 4:	Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell at the UE antenna connector including time alignment error between the two cells

A.4.5.2.5.2 Test Requirements

The UE shall be continuously scheduled in LTE PCell and NR PSCell during the entire length of T1. During the time duration T1 the UE shall transmit at least 99.5% of ACK/NACK on NR PSCell. The UE is only allowed to cause interruptions immediately before and immediately after an SMTC. Each interruption on NR PSCell shall not exceed X defined in Table A.4.5.2.5.2-1 if the NR PSCell is not in the same band as the E-UTRAN deactivated SCell or Y in Table A.4.5.2.3.2-1 if the NR PSCell is in the same band as the E-UTRAN deactivated SCell.

Table A.4.5.2.5.2-1: Interruption length X and Y at measurements on deactivated E-UTRA SCC

μ	NR Slot length (ms)	Interruption length X slot	Interruption length Y slot
		Sync	
0	1	1	1
1	0.5	1	1

Each interruption on E-UTRAN PCell shall not exceed 1 subframe if the PCell is not in the same band as the deactivated SCell, or 5 subframes if the PCell is in the same band as the deactivated SCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.2.6 E-UTRAN – NR FR1 interruptions during measurements on deactivated E-UTRAN SCC in asynchronous EN-DC

A.4.5.2.6.1 Test Purpose and Environment

The purpose of this test is to verify E-UTRAN PCell and NR PSCell interruptions during the measurement on the deactivated NR SCC, the UE missed ACK/NACK does not exceed the limits. This test will verify the missed ACK/NACK rate for E-UTRAN PCell and NR PSCell in EN-DC specified in TS 38.133 clause 8.2.1. Supported test configurations are shown in table A.4.5.2.6.1-1.

The general test parameters and NR cell specific test parameters are given in Table A.4.5.2.6.1-1 and A.4.5.2.6.1-2 below. And the E-UTRAN cell specific test parameters can refer to Table A.3.7.2.1-1. In the test there are three cells: Cell1, Cell2 and Cell3. Cell1 and Cell3 is E-UTRAN PCell and E-UTRAN deactivated SCell, Cell2 is NR FR1 PSCell. Cell1 shall be configured as LTE PCell and Cell2 shall be configured as NR PSCell. The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, the UE is connected to Cell1 and Cell2 and the RRC message including *measCycleSCell* or *allowInterruptions* for the deactivated NR SCells is received at the UE antenna connector. During T1, LTE PCell and NR PSCell are continuously scheduled in DL.

T antenna connector. During T1, LTE PCell and NR PSCell are continuously scheduled in DL.

Table A.4.5.2.6.1-1: Interruptions during measurements on deactivated E-UTRAN SCC supported test configurations

Config	Description
	LTE PCell + NR PSCell [Note 2]
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode

2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The duplex mode of the LTE SCell is determined based on the band combination to be tested.	

Table A.4.5.2.6.1-2: General test parameters for E-UTRAN – NR interruptions during measurements on deactivated E-UTRAN SCC in asynchronous EN-DC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2, 3	One is NR RF channel and the other two are E-UTRAN RF channels
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Configured PSCell		Cell2	PSCell on NR RF channel number 2.
Configured deactivated SCell		Cell3	Deactivated SCell on E-UTRAN RF channel number 3.
CP length		Normal	Applicable to Cell1, Cell2 and Cell3
DRX		OFF	
Measurement gap pattern Id		OFF	
SCell measurement cycle (measCycleSCell)	ms	640	
T1	s	10	

Table A.4.5.2.6.1-3: NR cell specific test parameters for E-UTRAN – NR interruptions during measurements on deactivated E-UTRAN SCC in asynchronous EN-DC

Parameter		Unit	Cell2
Frequency Range			FR1
Duplex mode	Config 1,4		FDD
	Config 2,3,5,6		TDD
TDD configuration	Config 1,4		Not Applicable
	Config 2,5		TDDConf.1.1
	Config 3,6		TDDConf.2.1
$BW_{channel}$	Config 1,4		10: $N_{RB,c}$ = 52
	Config 2,5		10: $N_{RB,c}$ = 52
	Config 3,6		40: $N_{RB,c}$ = 106
Initial DL BWP Configuration	Config 1,4		DLBWP.0.1
	Config 2,5		DLBWP.0.1
	Config 3,6		DLBWP.0.1
Dedicated DL BWP Configuration	Config 1,4		DLBWP.1.1
	Config 2,5		DLBWP.1.1
	Config 3,6		DLBWP.1.1
Initial UL BWP Configuration	Config 1,4		ULBWP.0.1
	Config 2,5		ULBWP.0.1
	Config 3,6		ULBWP.0.1
Dedicated UL BWP Configuration	Config 1,4		ULBWP.1.1
	Config 2,5		ULBWP.1.1
	Config 3,6		ULBWP.1.1
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2,5		SR.1.1 TDD
	Config 3,6		SR.2.1 TDD
RMSI CORESET parameters	Config 1,4		CR.1.1 FDD
	Config 2,5		CR.1.1 TDD
	Config 3,6		CR.2.1 TDD
PDCCH CORESET parameters	Config 1,4		CCR.1.1 FDD
	Config 2,5		CCR.1.1 TDD

	Config 3,6		CCR.2.1 TDD
TRS configuration	Config 1,4		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
OCNG Patterns			OP.1
SMTC Configuration			SMTC.1
TCI state			TCI.State.0
SSB Configuration	Config 1,2,4,5		SSB.1 FR1
	Config 3,6		SSB.2 FR1
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note 2		dBm/15 kHz	-104
SS-RSRP Note 3		dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	Config 1,2,4,5	dBm/9.36MHz	-58.96
	Config 3,6	dBm/38.16MHz	-52.86
Time offset to Cell1 Note 4		µs	500
Propagation Condition			AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modeled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselvess.

Note 4: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell at the UE antenna connector including time alignment error between the two cells

A.4.5.2.6.2 Test Requirements

The UE shall be continuously scheduled in LTE PCell and NR PSCell during the entire length of T1. During the time duration T1 the UE shall transmit at least 99.5% of ACK/NACK on E-UTRAN PCell and NR PSCell. The UE is only allowed to cause interruptions immediately before and immediately after an SMTC. Each interruption on NR PSCell shall not exceed the value defined in Table A.4.5.2.4.2-1 and Table A.4.5.2.4.2-2.

Table A.4.5.2.6.2-1: Interruption duration if the NR PSCell is not in the same band as the E-UTRAN deactivated SCell

μ	NR Slot length (ms)	Interruption length
0	1	2
1	0.5	2

Table A.4.5.2.6.2-2: Interruption duration if the NR PSCell is in the same band as the E-UTRAN deactivated SCell

μ	NR Slot length (ms)	Interruption length

0	1	2 + SMTC duration
1	0.5	2 + SMTC duration

Each interruption on E-UTRAN PCell shall not exceed 1 subframe if the PCell is not in the same band as the deactivated SCell, or 5 subframes if the PCell is in the same band as the deactivated SCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.2.7 Void

A.4.5.2.8 E-UTRAN - NR FR1 interruptions at NR SRS carrier based switching in asynchronous EN-DC

A.4.5.2.8.1 Test Purpose and Environment

The purpose of this test is to verify that when a UE needs to transmit aperiodic SRS, the UE can perform carrier based switching to one carrier not configured for PUCCH/PUSCH transmission from a CC with PUCCH/PUSCH transmission. The test will verify the interruption requirements on E-UTRAN PCell and NR PSCell in clause 8.2.1.2.12. Supported test configurations are shown in table A.4.5.2.8.1-1.

The general test parameters and NR cell specific test parameters are given in Table A.4.5.2.8.1-2 and A 4.5.2.8.1-3 below. And the E-UTRAN cell specific test parameters can refer to Table A.3.7.2.1-1. In the test there are three cells: Cell1, Cell2 and Cell3. Cell1 is E-UTRAN PCell, Cell2 is NR PSCell in FR1 with PUCCH/PUSCH transmission, Cell3 is an activated NR SCell in FR1 which operates in downlink without PUCCH/PUSCH transmission. The UE is configured with the SRS carrier based switching between PSCell and SCell.

The test consists of two successive time periods, with duration of T1 and T2, respectively. Throughout the test the UE shall be continuously scheduled on PCell and PSCell. Immediately at the beginning of T2, a PDCCH with TPC-SRS-RNTI is sent to the UE to initiate NR SRS switching.

Table A.4.5.2.8.1-1: Interruptions at SRS carrier switching supported test configurations in FR1

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, PSCell FDD duplex mode, SCell TDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, PSCell TDD duplex mode, SCell TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, PSCell FDD duplex mode, SCell TDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, PSCell TDD duplex mode, SCell TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.4.5.2.8.1-2: General test parameters for E-UTRAN – NR FR1 interruptions at SRS carrier based switching in asynchronous EN-DC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2, 3	One is E-UTRAN RF channel and the other two are NR RF channels
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Configured PSCell		Cell2	Configured PSCell on NR RF channel number 2.
Configured SCell		Cell3	Configured activated secondary cell on NR RF channel number 3.

CP length		Normal	Applicable to Cell1, Cell2 and Cell3.
DRX		OFF	Continuous monitoring of primary cell
Filter coefficient		0	L3 filtering is not used
T1	s	5	
T2	ms	40	UE shall perform SRS switching during T2

Table A.4.5.2.8.1-3: NR Cell specific test parameters for E-UTRAN – NR FR1 interruptions at SRS carrier based switching in asynchronous EN-DC

Parameter		Unit	Cell2	Cell3
Frequency Range			FR1	FR1
Duplex mode	Config 1,4		FDD	TDD
	Config 2,3,5,6		TDD	TDD
TDD configuration	Config 1,4		Not Applicable	TDDConfig.1.1
	Config 2,5		TDDConf.1.1	TDDConfig.1.1
	Config 3,6		TDDConf.2.1	TDDConfig.2.1
$BW_{channel}$	Config 1,2,4,5	MHz	10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
	Config 3,6		40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
DL Initial BWP configuration	Config 1-6		DLBWP.0.1	DLBWP.0.1
DL dedicated BWP configuration	Config 1-6		DLBWP.1.1	DLBWP.1.1
UL Initial BWP configuration	Config 1-6		ULBWP.0.1	-
UL dedicated BWP configuration	Config 1-6		ULBWP.1.1	-
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	SR.1.1 TDD
	Config 2,5		SR.1.1 TDD	SR.1.1 TDD
	Config 3,6		SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	CR.1.1 TDD
	Config 2,5		CR.1.1 TDD	CR.1.1 TDD
	Config 3,6		CR.2.1 TDD	CR.2.1 TDD
RMC CORESET Reference Channel	Config 1,4		CCR.1.1 FDD	CCR.1.1 TDD
	Config 2,5		CCR.1.1 TDD	CCR.1.1 TDD
	Config 3,6		CCR.2.1 TDD	CCR.2.1 TDD
OCNG Patterns			OP.1	OP.1
TRS configuration	Config 1,4		TRS.1.1 FDD	TRS.1.1 TDD
	Config 2,5		TRS.1.1 TDD	TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD	TRS.1.2 TDD
SMTC configuration			SMTC.1	SMTC.1
SSB configuration	Config 1,2,4,5		SSB.1 FR1	SSB.1 FR1
	Config 3,6		SSB.2 FR1	SSB.2 FR1
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15 kHz	15 kHz
	Config 3,6		30 kHz	30 kHz
SRS Configuration	Config 1,2,4,5	kHz	-	SRS.1 TDD
	Config 3,6		-	SRS.2 TDD
PUCCH/PUSCH subcarrier spacing	Config 1,2,4,5	kHz	15 kHz	-
	Config 3,6		30 kHz	-
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				

EPRE ratio of PBCH to PBCH DMRS EPRE ratio of PDCCH DMRS to SSS EPRE ratio of PDCCH to PDCCH DMRS EPRE ratio of PDSCH DMRS to SSS EPRE ratio of PDSCH to PDSCH EPRE ratio of OCNG DMRS to SSS (Note 1) EPRE ratio of OCNG to OCNG DMRS (Note 1)				0
N_{oc} Note2		dBm/15kHz	-104	-104
N_{oc} Note2	Config 1,2,4,5	dBm/SCS	-104	-104
	Config 3,6		-101	-101
SS-RSRP Note3	Config 1,2,4,5	dBm/SCS	-87	-87
	Config 3,6		-84	-84
$\hat{E}_s / I_{ot}$		dB	17	17
$\hat{E}_s / N_{oc}$		dB	17	17
Io Note3	Config 1,2,4,5	dBm/ 9.36MHz	-58.96	-58.96
	Config 3,6	dBm/ 38.16MHz	-52.86	-52.86
Time offset to Cell1 Note 5		µs	-	3
Propagation condition		-	AWGN	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 5: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.

Table A.4.5.2.8.1-4: Void

A.4.5.2.8.2 Test Requirements

During the time duration T2, the interruption on NR PSCell during the switching from NR PSCell to NR SCell shall not exceed the value as defined in Table A.4.5.2.8.2-1 dependent on the applied SRS carrier switching time.

Table A4.5.2.8.2-1: Interruption length on NR active serving cells at NR SRS carrier switching (slot)

μ	NR Slot length (ms) of victim cell	SRS carrier switching time (us) Note 1	Interruption length X1 (slots)	
			Sub carrier spacing for agressor cell (kHz)	
			15	30
0	1	≤ 200	2	2
		300, 500	2	2
		900	3	3
1	0.5	≤ 200	3	2
		300, 500	3	3

		900	4	4
Note1: NR SRS carrier switching time is UE capability indicated by higher layer parameter *SRS-SwitchingTimeNR*.				

During the time duration T2, the interruption on E-UTRAN PCell during the switching from NR PSCell to NR SCell shall not exceed the value as defined in Table A.4.5.2.8.2-2 dependent on the applied SRS carrier switching time.

Table 4.5.2.8.2-2: Interruption length on E-UTRAN active serving cells at NR SRS carrier switching

NR SRS carrier switching time (us)[note1]	Interruption length X1 (subframes)
≤500	2
900	3
Note1: NR SRS carrier switching time is UE capability indicated by higher layer parameter *SRS-SwitchingTimeNR*.	

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.2.9 E-UTRAN – NR interruptions at E-UTRA SRS carrier based switching

A.4.5.2.9.1 Test Purpose and Environment

The purpose of this test is to verify that when a UE needs to transmit aperiodic SRS on a PUSCH-less carrier of SCell, the UE can perform carrier based switching to one PUSCH-less SCCs from a CC with PUSCH. The test will verify the interruption requirements on active serving cell in SCG in clause 8.2.1.2.13. Supported test configurations are shown in table A.4.5.2. x2.1-1.

In the test there are three cells: cell1, cell2 and cell3. Cell1 is E-UTRAN PCell on the primary component carrier. Cell3 is E-UTRAN SCell on the TDD secondary component carrier which operates in downlink without PUCCH/PUSCH. Cell2 is NR FR1 PSCell. The UE is configured with the SRS switching between E-UTRAN PCell and E-UTRAN SCell. The general test parameters, NR cell specific test parameters and E-UTRA SRS configurations are given in Table A.4.5.2.9.1-2, A.4.5.2.9.1-3 and Table A.4.5.2.9.1-4 below. And the E-UTRAN cell specific test parameters (for cell1 and cell3) can refer to Table A.3.7.2.1-1. The test consists of two successive time periods, with duration of T1 and T2, respectively. During T1 LTE PCell and NR PSCell are continuously scheduled in DL. Immediately at the beginning of T2, a PDCCH with SRS-TPC-RNTI is sent to the UE to initiate SRS switching.

Table A.4.5.2.9.1-1: E-UTRAN – NR interruptions at E-UTRA SRS carrier based switching supported test configurations

Config	Description
1	LTE FDD(cell1), LTE TDD (cell3), NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD(cell1), LTE TDD (cell3), NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD(cell1), LTE TDD (cell3), NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD(cell1), LTE TDD (cell3), NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD(cell1), LTE TDD (cell3), NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD(cell1), LTE TDD (cell3), NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.4.5.2.9.1-2: General test parameters for E-UTRAN – NR interruptions at E-UTRA SRS carrier based switching

Parameter	Unit	Value	Comment
RF Channel Number		1, 2, 3	One is NR RF channel and the other two are E-UTRAN RF channels
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Active PSCell		Cell2	PSCell on NR RF channel number 2.
Activated SCell		Cell3	SCell on E-UTRAN RF channel number 3.
CP length		Normal	Applicable to Cell1, Cell2 and Cell3
DRX		OFF	
Measurement gap pattern Id		OFF	
T1	s	0.2	
T2	s	0.2	UE shall perform SRS switching during T2

Table A.4.5.2.9.1-3: NR cell specific test parameters for E-UTRAN – NR interruptions at E-UTRA SRS carrier based switching

Parameter		Unit	Cell2
Frequency Range			FR1
Duplex mode	Config 1,4		FDD
	Config 2,3,5,6		TDD
TDD configuration	Config 1,4		Not Applicable
	Config 2,5		TDDConf.1.1
	Config 3,6		TDDConf.2.1
$BW_{channel}$	Config 1,4	MHz	10: $N_{RB,c}$ = 52
	Config 2,5		10: $N_{RB,c}$ = 52
	Config 3,6		40: $N_{RB,c}$ = 106
Initial DL BWP Configuration	Config 1,4		DLBWP.0.1
	Config 2,5		DLBWP.0.1
	Config 3,6		DLBWP.0.1
Dedicated DL BWP Configuration	Config 1,4		DLBWP.1.1
	Config 2,5		DLBWP.1.1
	Config 3,6		DLBWP.1.1
Initial UL BWP Configuration	Config 1,4		ULBWP.0.1
	Config 2,5		ULBWP.0.1
	Config 3,6		ULBWP.0.1
Dedicated UL BWP Configuration	Config 1,4		ULBWP.1.1
	Config 2,5		ULBWP.1.1
	Config 3,6		ULBWP.1.1
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2,5		SR.1.1 TDD
	Config 3,6		SR.2.1 TDD
RMSI CORESET parameters	Config 1,4		CR.1.1 FDD
	Config 2,5		CR.1.1 TDD
	Config 3,6		CR.2.1 TDD
PDCCH CORESET parameters	Config 1,4		CCR.1.1 FDD
	Config 2,5		CCR.1.1 TDD
	Config 3,6		CCR.2.1 TDD
TRS configuration	Config 1,4		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
OCNG Patterns			OP.1
SMTC Configuration			SMTC.1
TCI state			TCI.State.0
SSB Configuration	Config 1,2,4,5		SSB.1 FR1
	Config 3,6		SSB.2 FR1

Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note 2		dBm/15 kHz	-104
SS-RSRP Note 3		dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	Config 1,2,4,5	dBm/9.36MHz	-58.96
	Config 3,6	dBm/38.16MHz	-52.86
Time offset to Cell1 Note 4		µs	33
Propagation Condition			AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modeled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell at the UE antenna connector including time alignment error between the two cells

Table A.4.5.2.9.1-4: Sounding Reference Symbol Configuration for E-UTRAN – NR interruptions at E-UTRA SRS carrier based switching

Field	Value	Comment
srsBandwidthConfiguration	bw5	
srsSubframeConfiguration	Sc8	Once every 5 subframes
ackNackSrsSimultaneousTransmission	FALSE	
srsMaxUpPTS	N/A	Not applicable for E-UTRAN FDD
srsBandwidth	0	No hopping
srsHoppingBandwidth	hbw0	
frequencyDomainPosition	0	
Duration	TRUE	Indefinite duration
Srs-ConfigurationIndex	47	SRS periodicity of 40ms.
transmissionComb	0	
cyclicShift	cs0	No cyclic shift
SRS-AntennaPort	an1	Number of antenna ports used for SRS transmission
Note: For further information see clause 6.3.2 in TS 36.331.		

A.4.5.2.9.2 Test Requirements

The UE shall be continuously scheduled in NR PSCell throughout the test and during the time duration T2, Each interruption on NR PSCell shall not exceed X defined in Table A.4.5.2.9.2-1.

Table A.4.5.2.9.2-1: Interruption length X (slot) E-UTRAN – NR at E-UTRA SRS carrier based switching

μ	NR Slot length (ms)	Interruption length X3 (slots)
0	1	2
1	0.5	3

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.2.10 E-UTRAN – NR FR1 interruptions due to RRM and RLM/BFD measurements on deactivated NR PSCell

A.4.5.2.10.1 Test Purpose and Environment

The purpose of this test is to verify E-UTRAN PCell interruptions due to RRM measurements and RLM/BFD measurements on the deactivated NR PSCell, and the UE missed ACK/NACK does not exceed the limits. This test will verify the missed ACK/NACK rate for E-UTRAN PCell in EN-DC according to the requirements specified in TS 36.133 clause 7.32.2.20 for RRM measurements and 7.32.2.X for RLM and BFD measurements. Supported test configurations are shown in table A.4.5.2.10.1-1.

The general test parameters and NR cell specific test parameters are given in Table A.4.5.2.10.1-1 and A.4.5.2.10.1-2 below. And the E-UTRAN cell specific test parameters can be referred to in Table A.3.7.2.1-1. In the test there are two cells: Cell1 and Cell2. Cell1 is E-UTRAN PCell, and Cell2 is deactivated NR FR1 PSCell. The test consists of one single period, T1.

Prior to the start of the time duration T1, the UE is connected to Cell1 and Cell2. At the start of T1, the RRC message including *measCycleSCell* or *allowInterruptions* is received at the UE antenna connector and Cell2 is deactivated. During T1, Cell1 continuously schedules data in DL and the UE is configured with RRM and RLM/BFD measurements on the deactivated Cell2. It is assumed that Cell1 and Cell2 are synchronized with a timing difference not larger than 3ms between the two cells.

Table A.4.5.2.10.1-1: Interruptions due to RRM and RLM/BFD measurements on deactivated NR PSCell supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.4.5.2.10.1-2: General test parameters for E-UTRAN – NR interruptions due to measurements on deactivated PSCell in synchronous EN-DC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2	One is NR RF channel and the other is E-UTRAN RF channel
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Configured deactivated PSCell		Cell2	PSCell on NR RF channel number 2.
CP length		Normal	Applicable to Cell1, Cell2

DRX		OFF	
Measurement gap pattern Id		OFF	
SCell measurement cycle (measCycleSCell)	ms	640	
T1	s	10	

Table A.4.5.2.10.1-3: NR cell specific test parameters for E-UTRAN – NR interruptions due to measurements on deactivated PSCell in synchronous EN-DC

Parameter		Unit	Cell2
Frequency Range			FR1
Duplex mode	Config 1,4		FDD
	Config 2,3,5,6		TDD
TDD configuration	Config 1,4		Not Applicable
	Config 2,5		TDDConf.1.1
	Config 3,6		TDDConf.2.1
$BW_{channel}$	Config 1,4		10: $N_{RB,c}$ = 52
	Config 2,5		10: $N_{RB,c}$ = 52
	Config 3,6		40: $N_{RB,c}$ = 106
Initial DL BWP Configuration	Config 1,4		DLBWP.0.1
	Config 2,5		DLBWP.0.1
	Config 3,6		DLBWP.0.1
Dedicated DL BWP Configuration	Config 1,4		DLBWP.1.1
	Config 2,5		DLBWP.1.1
	Config 3,6		DLBWP.1.1
Initial UL BWP Configuration	Config 1,4		ULBWP.0.1
	Config 2,5		ULBWP.0.1
	Config 3,6		ULBWP.0.1
Dedicated UL BWP Configuration	Config 1,4		ULBWP.1.1
	Config 2,5		ULBWP.1.1
	Config 3,6		ULBWP.1.1
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2,5		SR.1.1 TDD
	Config 3,6		SR.2.1 TDD
RMSI CORESET parameters	Config 1,4		CR.1.1 FDD
	Config 2,5		CR.1.1 TDD
	Config 3,6		CR.2.1 TDD
PDCCH CORESET parameters	Config 1,4		CCR.1.1 FDD
	Config 2,5		CCR.1.1 TDD
	Config 3,6		CCR.2.1 TDD
TRS configuration	Config 1,4		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
OCNG Patterns			OP.1
SMTC Configuration			SMTC.1
TCI state			TCI.State.0
SSB Configuration	Config 1,2,4,5		SSB.1 FR1
	Config 3,6		SSB.2 FR1
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			

EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note 2		dBm/15 kHz	-104
SS-RSRP Note 3		dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	Config 1,2,4,5	dBm/9.36MHz	-58.96
	Config 3,6	dBm/38.16MHz	-52.86
Time offset to Cell1 Note 4		µs	500
Propagation Condition			AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modeled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselvess.

Note 4: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell at the UE antenna connector including time alignment error between the two cells

A.4.5.2.10.2 Test Requirements

The UE shall be continuously scheduled in Cell1 during the entire length of T1 and the UE is configured with RRM and RLM/BFD measurements on the deactivated Cell2. During the time duration T1 the UE shall transmit at least 98.5% of ACK/NACK on E-UTRAN PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.2.11 E-UTRAN - NR FR1 interruptions at NR SRS antenna port switching with 1 SRS symbol in a slot in synchronous EN-DC

A.4.5.2.11.1 Test Purpose and Environment

The purpose of this test is to verify that the UE can perform SRS antenna port switching when the UE is configured with the higher layer parameter *usage* in *SRS-ResourceSet* set as 'antennaSwitching'. The test will verify the interruption requirements on E-UTRAN PCell and NR PSCell at SRS antenna switching in synchronous EN-DC as specified in Table 8.2.1.2.18-1 of clause 8.2.1.2.18. Supported test configurations for LTE PCell and NR PSCell are shown in table A.4.5.2.11.1-1. Supported test configurations for NR SCell are shown in table A.4.5.2.11.1-1A. Test configuration for LTE PCell and NR PSCell and test configuration for NR SCell are chosen independently.

The general test parameters and NR cell specific test parameters are given in Table A.4.5.2.11.1-2 and A 4.5.2.11.1-3 below. The dedicated SRS configuration for antenna port switching with 1 SRS symbol in a slot is given in Table A 4.5.2.11.1-3. And the E-UTRAN cell specific test parameters can refer to Table A.3.7.2.1-1. In the test there are three cells: Cell1, Cell2 and Cell3. Cell1 is E-UTRAN PCell, Cell2 is NR PSCell in FR1 and Cell3 is an activated NR SCell in FR1. The UE is configured with SRS antenna port switching on NR PSCell.

The test consists of two successive time periods, with duration of T1 and T2, respectively. Throughout the test the UE shall be continuously scheduled on PCell and SCell. Immediately at the beginning of T2, a PDCCH with TPC-SRS-RNTI is sent to the UE to initiate NR SRS switching.

Table A.4.5.2.11.1-1: Interruptions at SRS antenna port switching supported test configurations in FR1 for LTE PCell and NR PSCell

Config	Description
1	LTE FDD, NR PSCell 15 kHz SSB SCS, =10 MHz bandwidth, TDD duplex mode, NR SCell 15 kHz SSB SCS, =10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR PSCell 15 kHz SSB SCS, =10 MHz bandwidth, TDD duplex mode, NR SCell 15 kHz SSB SCS, =10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR PSCell 30 kHz SSB SCS, =40 MHz bandwidth, TDD duplex mode, NR SCell 30 kHz SSB SCS, =10 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR PSCell 15 kHz SSB SCS, =10 MHz bandwidth, TDD duplex mode, NR SCell 15 kHz SSB SCS, =10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR PSCell 15 kHz SSB SCS, =10 MHz bandwidth, TDD duplex mode, NR SCell 15 kHz SSB SCS, =10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR PSCell 30 kHz SSB SCS, =40 MHz bandwidth, TDD duplex mode, NR SCell 30 kHz SSB SCS, =10 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.4.5.2.11.1-1A: Void

Table A.4.5.2.11.1-2: General test parameters for E-UTRAN – NR FR1 interruptions at SRS antenna port switching in synchronous EN-DC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2, 3	One is E-UTRAN RF channel and the other two are NR RF channels
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Configured PSCell		Cell2	Configured PSCell on NR RF channel number 2.
Configured SCell		Cell3	Configured activated secondary cell on NR RF channel number 3.
CP length		Normal	Applicable to Cell1, Cell2 and Cell3.
DRX		OFF	Continuous monitoring of primary cell
Filter coefficient		0	L3 filtering is not used
T1	s	0.2	
T2	ms	40	UE shall perform SRS switching during T2

Table A.4.5.2.11.1-3: NR Cell specific test parameters for E-UTRAN – NR FR1 interruptions at SRS antenna port switching in synchronous EN-DC

Parameter		Unit	Cell2	Cell3
Frequency Range			FR1	FR1
Duplex mode	Config 1,4		FDD	TDD
	Config 2,3,5,6		TDD	TDD
TDD configuration	Config 1,4		Not Applicable	TDDConfig.1.2 Note6
	Config 2,5		TDDConf.1.2	TDDConfig.1.2 Note6
	Config 3,6		TDDConf.2.3	TDDConfig.2.3 Note6
$BW_{channel}$	Config 1,2,4,5	MHz	10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
	Config 3,6		40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
DL Initial BWP configuration	Config 1-6		DLBWP.0.1	DLBWP.0.1
DL dedicated BWP configuration	Config 1-6		DLBWP.1.1	DLBWP.1.1
UL Initial BWP configuration	Config 1-6		ULBWP.0.1	-

UL dedicated BWP configuration	Config 1-6		ULBWP.1.1	-
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	SR.1.1 TDD
	Config 2,5		SR.1.1 TDD	SR.1.1 TDD
	Config 3,6		SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	CR.1.1 TDD
	Config 2,5		CR.1.1 TDD	CR.1.1 TDD
	Config 3,6		CR.2.1 TDD	CR.2.1 TDD
RMC CORESET Reference Channel	Config 1,4		CCR.1.1 FDD	CCR.1.1 TDD
	Config 2,5		CCR.1.1 TDD	CCR.1.1 TDD
	Config 3,6		CCR.2.1 TDD	CCR.2.1 TDD
OCNG Patterns			OP.1	OP.1
TRS configuration	Config 1,4		TRS.1.1 FDD	TRS.1.1 TDD
	Config 2,5		TRS.1.1 TDD	TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD	TRS.1.2 TDD
SMTC configuration			SMTC.1	SMTC.1
SSB configuration	Config 1,2,4,5		SSB.1 FR1	SSB.1 FR1
	Config 3,6		SSB.2 FR1	SSB.2 FR1
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15 kHz	15 kHz
	Config 3,6		30 kHz	30 kHz
SRS Configuration	Config 1,2,4,5	kHz	SRS.x1	-
	Config 3,6		SRS.x2	-
PUCCH/PUSCH subcarrier spacing	Config 1,2,4,5	kHz	15 kHz	-
	Config 3,6		30 kHz	-
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2		dBm/15kHz	-104	-104
N_{oc} Note2	Config 1,2,4,5	dBm/SCS	-104	-104
	Config 3,6		-101	-101
SS-RSRP Note3	Config 1,2,4,5	dBm/SCS	-87	-87
	Config 3,6		-84	-84
$\hat{E}_s / I_{ot}$		dB	17	17
$\hat{E}_s / N_{oc}$		dB	17	17
Io Note3	Config 1,2,4,5	dBm/ 9.36MHz	-58.96	-58.96
	Config 3,6	dBm/ 38.16MHz	-52.86	-52.86
Time offset to Cell1 Note 4		µs	33	33 + Time offset to Cell2
Time offset to Cell2 Note 5		µs	-	3
Propagation condition		-	AWGN	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.

Note 5: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.

Note 6: The test configuration for NR SCell is selected from Table A.4.5.2.11.1-1A.

Table A.4.5.2.11.1-4: SRS.X1 Dedicated SRS Configuration for antenna port switching with 1 SRS symbol in a slot in synchronous EN-DC

15kHz, scenario 1	1T2R		2T4R		1T4R			
srs-ResourceId	0	1	0	1	0	1	2	3
startPosition	3	3	3	3	3	3	3	3
nrofSymbols	1	1	1	1	1	1	1	1
nrofSRS-Ports	port1	port1	port2	port2	port1	port1	port1	port1
periodicityAndOffset-p	sl40, 1	sl40, 6	sl40, 1	sl40, 6	sl40, 1	sl40, 6	sl40, 11	sl40, 16
Note 1: 'xTxR' depends on indicated UE capability for SRS antenna port switching Note 2: SRS configurations follow (the dedicated configuration table) if the entries are included in Table A.4.5.2.11.1-4, otherwise following corresponding common configuration in A.3.24 as specified in Table A.4.5.2.11.1-3								

30kHz, scenario 1	1T2R		2T4R		1T4R			
srs-ResourceId	0	1	0	1	0	1	2	3
startPosition	3	3	3	3	3	3	3	3
nrofSymbols	1	1	1	1	1	1	1	1
nrofSRS-Ports	port1	port1	port2	port2	port1	port1	port1	port1
periodicityAndOffset-p	sl80, 3	sl80, 13	sl80, 3	sl80, 13	sl80, 3	sl80, 13	sl80, 23	sl80, 33
Note 1: 'xTxR' depends on indicated UE capability for SRS antenna port switching Note 2: SRS configurations follow (the dedicated configuration table) if the entries are included in Table A. 4.5.2.11.1-4, otherwise following corresponding common configuration in A.3.24 as specified in Table A.4.5.2.11.1-3								

A.4.5.2.11.2 Test Requirements

In the test, the interruption is verified by monitoring ACK/NACK sent in E-UTRAN PCell and NR SCell during the SRS antenna switching on NR PSCell.

During the time duration T2, the DL interruption on NR SCell during the SRS antenna switching in each SRS transmission slot on NR PSCell shall not exceed 1 slot if SCell is indicated in *txSwitchImpactToRx*, and the UL interruption on NR SCell during the SRS antenna switching in each SRS transmission slot on NR PSCell shall not exceed 1 slot if SCell is indicated in *txSwitchWithAnotherBand.* Otherwise, the NR SCell shall not be interrupted.

During the time duration T2, the DL interruption on E-UTRAN PCell during the SRS antenna switching in each SRS transmission slot on NR PSCell shall not exceed 1 subframe if PCell is indicated in *txSwitchImpactToRx,* and

the UL interruption on E-UTRAN PCell during the SRS antenna switching in each SRS transmission slot on NR PSCell shall not exceed 1 subframe if SCell is indicated in *txSwitchWithAnotherBand.* Otherwise, the EUTRAN PCell shall not be interrupted.

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.2.12 E-UTRAN - NR FR1 interruptions at NR SRS antenna port switching in asynchronous EN-DC

A.4.5.2.12.1 Test Purpose and Environment

The purpose of this test is to verify the interruption during NR SRS antenna port switching on E-UTRAN PCell and NR SCell in TS 36.133 clause 7.32.2.18 and clause 8.2.1.2.18. Supported test configurations for LTE PCell and NR PSCell are shown in table A.4.5.2.12.1-1. Supported test configurations for NR SCell are shown in table A.4.5.2.12.1-1A. Test configuration for LTE PCell and NR PSCell and test configuration for NR SCell are chosen independently.

The general test parameters and NR cell specific test parameters are given in Table A.4.5.2.12.1-2, A.4.5.2.12.1-3 and A.4.5.2.12.1-4 below. And the E-UTRAN cell specific test parameters can refer to Table A.3.7.2.1-1. In the test there are three cells: Cell1, Cell2 and Cell3. Cell1 is E-UTRAN PCell, Cell2 is NR PSCell in FR1, Cell3 NR SCell in FR1. The UE is configured with the SRS antenna port switching on Cell2.

The test consists of two time period, with duration of T1 and T2. Prior to the start of the time duration T1, the UE is connected to Cell1, Cell2 and Cell3. LTE PCell and NR PSCell are continuously scheduled in DL during T1 and T2. UE receives RRC message to trigger periodic SRS for antenna switching and it ready for SRS antenna switching before T2.

Table A.4.5.2.12.1-1: Interruptions at SRS antenna port switching supported test configurations in FR1 for LTE PCell and NR PSCell

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, =10 MHz bandwidth, TDD duplex mode, NR SCell 15 kHz SSB SCS, =10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, =10 MHz bandwidth, TDD duplex mode, NR SCell 15 kHz SSB SCS, =10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, =40 MHz bandwidth, TDD duplex mode, NR SCell 30 kHz SSB SCS, =10 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, =10 MHz bandwidth, TDD duplex mode, NR SCell 15 kHz SSB SCS, =10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, =10 MHz bandwidth, TDD duplex mode, NR SCell 15 kHz SSB SCS, =10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, =40 MHz bandwidth, TDD duplex mode, NR SCell 30 kHz SSB SCS, =10 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.4.5.2.12.1-1A: Void

Table A.4.5.2.12.1-2: General test parameters for E-UTRAN – NR FR1 interruptions at SRS antenna port switching in asynchronous EN-DC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2, 3	One is E-UTRAN RF channel and the other two are NR RF channels
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Configured PSCell		Cell2	Configured PSCell on NR RF channel number 2.

Configured SCell		Cell3	Configured activated secondary cell on NR RF channel number 3.
CP length		Normal	Applicable to Cell1, Cell2 and Cell3.
DRX		OFF	Continuous monitoring of primary cell
Filter coefficient		0	L3 filtering is not used
T1	s	0.2	
T2	ms	40	

Table A.4.5.2.12.1-3: NR Cell specific test parameters for E-UTRAN – NR FR1 interruptions at SRS antenna port switching in asynchronous EN-DC for NR PSCell

Parameter		Unit	Cell2
Frequency Range			FR1
Duplex mode	Config 1,4		FDD
	Config 2,3,5,6		TDD
TDD configuration	Config 1,4		Not Applicable
	Config 2,5		TDDConf.1.2
	Config 3,6		TDDConf.2.3
$BW_{channel}$	Config 1,2,4,5	MHz	10: $N_{RB,c}$ = 52
	Config 3,6		40: $N_{RB,c}$ = 106
DL Initial BWP configuration	Config 1-6		DLBWP.0.1
DL dedicated BWP configuration	Config 1-6		DLBWP.1.1
UL Initial BWP configuration	Config 1-6		ULBWP.0.1
UL dedicated BWP configuration	Config 1-6		ULBWP.1.1
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2,5		SR.1.1 TDD
	Config 3,6		SR.2.1 TDD
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD
	Config 2,5		CR.1.1 TDD
	Config 3,6		CR.2.1 TDD
RMC CORESET Reference Channel	Config 1,4		CCR.1.1 FDD
	Config 2,5		CCR.1.1 TDD
	Config 3,6		CCR.2.1 TDD
OCNG Patterns			OP.1
TRS configuration	Config 1,4		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
SMTC configuration			SMTC.1
SSB configuration	Config 1,2,4,5		SSB.1 FR1
	Config 3,6		SSB.2 FR1
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15 kHz
	Config 3,6		30 kHz
SRS Configuration	Config 1,2,4,5		SRSConf.1
	Config 3,6		SRSConf.2
PUCCH/PUSCH subcarrier spacing	Config 1,2,4,5	kHz	15 kHz
	Config 3,6		30 kHz
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			

EPRE ratio of OCNG DMRS to SSS (Note 1) EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note2		dBm/15kHz	-104
N_{oc} Note2	Config 1,2,4,5	dBm/SCS	-104
	Config 3,6		-101
SS-RSRP Note3	Config 1,2,4,5	dBm/SCS	-87
	Config 3,6		-84
$\hat{E}_s / I_{ot}$		dB	17
$\hat{E}_s / N_{oc}$		dB	17
Io Note3	Config 1,2,4,5	dBm/ 9.36MHz	-58.96
	Config 3,6	dBm/ 38.16MHz	-52.86
Time offset to Cell1 Note 4		µs	500
Time offset to Cell2 Note 5		µs	-
Propagation condition		-	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell at the UE antenna connector including time alignment error between the two cells.

Note 5: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.

Table A.4.5.2.12.1-4: NR Cell specific test parameters for E-UTRAN – NR FR1 interruptions at SRS antenna port switching in asynchronous EN-DC for NR SCell

Parameter		Unit	Cell3
Frequency Range			FR1
Duplex mode	Config 1		FDD
	Config 2,3		TDD
TDD configuration	Config 1		Not Applicable
	Config 2		TDDConfig.1.2
	Config 3		TDDConfig.2.3
$BW_{channel}$	Config 1		10: $N_{RB,c}$ = 52
	Config 2		10: $N_{RB,c}$ = 52
	Config 3		40: $N_{RB,c}$ = 106
Initial DL BWP Configuration	Config 1		DLBWP.0.1
	Config 2		DLBWP.0.1
	Config 3		DLBWP.0.1
Dedicated DL BWP Configuration	Config 1		DLBWP.1.1
	Config 2		DLBWP.1.1
	Config 3		DLBWP.1.1
Initial UL BWP Configuration	Config 1		ULBWP.0.1
	Config 2		ULBWP.0.1
	Config 3		ULBWP.0.1
Dedicated UL BWP Configuration	Config 1		ULBWP.1.1
	Config 2		ULBWP.1.1
	Config 3		ULBWP.1.1
	Config 1		-

PDSCH Reference measurement channel	Config 2		-
	Config 3		-
RMSI CORESET parameters	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
PDCCH CORESET parameters	Config 1		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
TRS configuration	Config 1		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
OCNG Patterns	Config 1,2		OP.1
	Config 3		OP.1
SMTC Configuration			SMTC.1
TCI state			TCI.State.0
SSB Configuration	Config 1,2		SSB.1 FR1
	Config 3		SSB.2 FR1
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note 2		dBm/15 kHz	-104
SS-RSRP Note 3		dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	Config 1,2	dBm/ 9.36MHz	-58.96
	Config 3	dBm/ 38.16MHz	-52.86
Time offset to Cell1 Note 4		µs	500 + Time offset to Cell2
Time offset to Cell2 Note 5		µs	3
Propagation Condition			AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modeled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselvess.

Note 4: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell at the UE antenna connector including time alignment error between the two cells

Note 5: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.

Table A.4.5.2.12.1-5: SRSConf.1 Dedicated SRS Configuration for antenna port switching

SRSConf.1	1T2R Note 1	2T4R Note 1	1T4R Note 1

srs-ResourceId	0	1	0	1	0	1	2	3
startPosition	5	[3]	5	[3]	5	[3]	5	[3]
nrofSymbols	1	1	1	1	1	1	1	1
nrofSRS-Ports	port1	port1	port2	port2	port1	port1	port1	port1
periodicityAndOffset-p	sl40, [1]	sl40, [1]	sl40, [1]	sl40, [1]	sl40, [1]	sl40, [1]	sl40, [6]	sl40, [6]
Note 1: 'xTxR' depends on indicated UE capability for SRS antenna port switching Note 2: SRS configurations follow (the dedicated configuration table) if the entries are included, otherwise following corresponding common configuration in A.3.24								

Table A.4.5.2.12.1-6: SRSConf.2 Dedicated SRS Configuration for antenna port switching

SRSConf.2	1T2R Note 1		2T4R Note 1		1T4R Note 1			
srs-ResourceId	0	1	0	1	0	1	2	3
startPosition	5	[3]	5	[3]	5	[3]	5	[3]
nrofSRS-Ports	port1	port1	port2	port2	port1	port1	port1	port1
nrofSymbols	1	1	1	1	1	1	1	1
periodicityAndOffset-p	sl80, [3]	sl80, [3]	sl80, [3]	sl80, [3]	sl80, [3]	sl80, [3]	sl80, [13]	sl80, [13]
Note 1: 'xTxR' depends on indicated UE capability for SRS antenna port switching Note 2: SRS configurations follow (the dedicated configuration table) if the entries are included, otherwise following corresponding common configuration in A.3.24								

A.4.5.2.12.2 Test Requirements

The UE shall be scheduled on Cell 1 and Cell3 continuously throughout the test. During the time duration T2, the interruption on Cell 1 shall not be more than the values specified in clause 7.32.2.18 in TS 36.133 [15] for each SRS transmission slot, and the interruption on Cell 3 shall not be more than the values specified in clause 8.2.1.2.18 for each SRS transmission slot

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.3 SCell Activation and Deactivation Delay

A.4.5.3.1 SCell Activation and deactivation of known SCell in FR1 for 160ms SCell measurement cycle

A.4.5.3.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SCell activation and deactivation times are within the requirements stated in clause 8.3, when the SCell in FR1 is known by the UE at the time of activation.

The supported test configurations for LTE PCell and NR PSCell are shown in table A.4.5.3.1.1-1 below. Supported test configurations for NR SCell are shown in table A.4.5.3.1.1-1A below. Test configuration for LTE PCell and NR PSCell and test configuration for NR SCell are chosen independently. The test parameters are given in Tables A.4.5.3.1.1-2 and cell-specific parameters in A.4.5.3.1.1-3 and A.4.5.3.1.1-4 below. The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are three carriers, E-UTRA has one cell, NR has two cells. All cells have constant signal levels throughout the test. Before the test starts the UE is connected to Cell 1 (PCell) on E-UTRA and Cell 2 (PSCell) on NR, but is not aware of Cell 3 (SCell) on NR. The UE is monitoring the PCell and PSCell. The UE shall be continuously scheduled in the PCell and PSCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 3) becomes configured on NR. The UE now starts monitoring the SCell. The test equipment sends a MAC message for activation of the SCell.

The point in time at which the MAC message is received at the UE antenna connector, in a slot # denoted m, defines the start of time period T2. The UE shall be able to report valid CSI in PSCell for the activated SCell at latest in slot $m + \frac{T_{\text{HARQ}} + T_{\text{activation_time}} + T_{\text{CSI_Reporting}}}{\text{NR slot length}}$, as defined in clause 8.3. The UE shall start reporting CSI in PSCell after at least one CSI-RS transmission occasion for channel measurement and reporting after slot (m+k) and shall report CQI index 0 (out-of-range) until the SCell activation has been completed. Any PSCell interruption due to activation of SCell shall occur in the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to slot $m + 1 + \frac{T_{\text{HARQ}} + 3\text{ms} + T_{\text{X}}}{\text{NR slot length}} + N_{\text{interruption}}$, as defined in clause 8.3, where $N_{\text{interruption}}$ is the interruption length given in clause 8.2. Any E-UTRA PCell interruption due to activation of SCell shall occur in the subframe $m_1 + 1 + \frac{T_{\text{HARQ}}}{\text{EUTRA slot length}}$ to subframe $m_2 + 1 + \frac{T_{\text{HARQ}} + 3\text{ms} + T_{\text{X}}}{\text{EUTRA slot length}} + N_{\text{interruption}}$, where m_1 and m_2 are the index of the first and last subframe of E-UTRA PCell which overlaps with slot m, and $N_{\text{interruption}}$ is the interruption length given in TS 36.133 [14] clause 7.32.

Time period T3 starts when a MAC message for deactivation of SCell, sent from the test equipment to the UE in a slot # denoted n, is received at the UE antenna connector. The UE shall carry out deactivation of the SCell in a slot $n + \frac{T_{\text{HARQ}} + 3ms}{NR\ slot\ length}$, as defined in clause 8.3. The starting point of any PSCell interruption due to the deactivation shall occur in the slot $n + 1 + \frac{T_{\text{HARQ}}}{NR\ slot\ length}$ to $n + 1 + \frac{T_{\text{HARQ}} + 3\text{ms}}{NR\ slot\ length}$, as defined in clause 8.3. The starting point of any E-UTRA PCell interruption due to the deactivation shall occur in the subframe $n_1 + 1 + \frac{T_{\text{HARQ}}}{EUTRA\ subframe\ length}$ to subframe $n_2 + 1 + \frac{T_{\text{HARQ}} + 3\text{ms}}{EUTRA\ subframe\ length}$, where n_1 and n_2 are the index of the first and last subframe of E-UTRA PCell which overlaps with slot n.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PSCell during activation and deactivation of SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The test equipment verifies the deactivation time by counting the slots from the time when the SCell deactivation command is sent until CSI reporting for SCell is discontinued.

Table A.4.5.3.1.1-1: known FR1 SCell activation in non-DRX for 160ms SCell measurement cycle supported test configurations for LTE PCell and NR PSCell

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration,	

Table A.4.5.3.1.1-1A: known FR1 SCell activation in non-DRX for 160ms SCell measurement cycle supported test configurations for NR SCell

$Config_{SCell}$	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode

3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration,	

Table A.4.5.3.1.1-2: General test parameters for known FR1 SCell activation case, 160ms SCell measurement cycle

Parameter	Unit	Value	Comment
RF Channel Number		1,2,3	One E-UTRAN radio channel (1) and two NR radio channel (2,3) are used for this test
Active PCell		Cell 1	Primary cell on E-UTRAN RF channel number 1. As specified in clause A.3.7.2.1
Active PSCell		Cell 2	Primary secondary cell on NR RF channel number 2.
Configured deactivated SCell		Cell 3	Configured deactivated secondary cell on NR RF channel number 3
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
Cell-individual offset for cells on E-UTRA RF channel number	dB	0	Individual offset for cells on primary component carrier.
Cell-individual offset for cells on NR channel number	dB	0	Individual offset for cells on secondary component carrier.
SCell measurement cycle (measCycleSCell)	ms	160	
Cell3 timing offset to cell2	µs	0	
Time alignment error between cell3 and cell2	µs	≤ Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
T1	s	7	During this time the PSCell shall be known and the SCell configured and detected.
T2	s	1	During this time the UE shall activate the SCell.
T3	s	1	During this time the UE shall deactivate the SCell.
T_{HARQ}	ms	k_1NR slot length	k_1 is a number of slots indicated by the PDSCH-to-HARQ_feedback timing indicator field in a corresponding DCI format or provided by *dl-DataToUL-ACK* if the PDSCH-to-HARQ feedback timing field is not present in the DCI format, the value is defined in 38.213 [3]
$T_{CSI_Reporting}$	ms	15	the delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting (clause 5.2.2.5 in TS 38.214) and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2]
k	slot	$k_1 + 3 \cdot N_{\text{slot}}^{\text{subframe},\,\mu} + 1$	As specified in clause 4.3 of TS 38.213 [3]

Table A.4.5.3.1.1-3: Cell specific test parameters for NR PSCell for known FR1 SCell activation case, 160ms SCell measurement cycle

Parameter		Unit	Cell 2		
			T1	T2	T3
SSB ARFCN			freq1		
Duplex mode	Config 1,4		FDD		
	Config 2,3,5,6		TDD		
TDD configuration	Config 1,4		Not Applicable		
	Config 2,5		TDDConf.1.1		
	Config 3,6		TDDConf.2.1		
$BW_{channel}$	Config 1,4	MHz	Note 7		
	Config 2,5		Note 7		
	Config 3,6		Note 7		
$BW_{occupied}$	Config 1,4	RB	52 Note 5		
	Config 2,5		52 Note 5		
	Config 3,6		106 Note 6		
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1		
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1		
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1		
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1		
DRX Cycle		ms	Not Applicable		
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD		
	Config 2,5		SR.1.1 TDD		
	Config 3,6		SR.2.1 TDD		
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD		
	Config 2,5		CR.1.1 TDD		
	Config 3,6		CR.2.1 TDD		
RMC CORESET Reference Channel	Config 1,4		CCR.1.1 FDD		
	Config 2,5		CCR.1.1 TDD		
	Config 3,6		CCR.2.1 TDD		
TRS configuration	Config 1,4		TRS.1.1 FDD		
	Config 2,5		TRS.1.1 TDD		
	Config 3,6		TRS.1.2 TDD		
OCNG Patterns	Config 1,2,4,5		OP.1 Note 5		
	Config 3,6		OP.1 Note 6		
SMTC configuration			SMTC.1		
SSB configuration	Config 1,2,4,5		SSB.1 FR1		
	Config 3,6		SSB.2 FR1		
CSI-RS configuration for CSI reporting	Config 1,4		CSI-RS.1.1 FDD		
	Config 2,5		CSI-RS.1.1 TDD		
	Config 3,6		CSI-RS.2.1 TDD		
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15		
	Config 3,6		30		
reportConfigType	Config 1-6		periodic		
reportQuantity	Config 1-6		cri-RI-PMI-CQI		
CSI reporting periodicity	Config 1,2,4,5	slot	5		
	Config 3,6		10		
CSI reporting offset	Config 1,2,4,5	slot	2		
	Config 3,6		4		
EPRE ratio of PSS to SSS		dB	0		

EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} Note2		dBm/15kHz	-104
N_{oc} Note2	Config 1,2,4,5	dBm/SCS	-104
	Config 3,6		-101
$\hat{E}_s / I_{ot}$		dB	17
$\hat{E}_s / N_{oc}$		dB	17
SS-RSRP Note3	Config 1,2,4,5	dBm/SCS	-87
	Config 3,6		-84
SCH_RP Note 3		dBm/15 kHz	-87
Io Note3	Config 1,2,4,5	dBm/9.36MHz	-58.96
	Config 3,6	dBm/38.16MHz	-52.87
Propagation condition		-	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.
Note 3: SS-RSRP, Io and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.]
Note 5: All UL/DL transmission shall be confined within $BW_{channel_actual\text{-}occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 6: All UL/DL transmission shall be confined within $BW_{channel_actual\text{-}occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 7: $N_{RB,c}$. is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.

Table A.4.5.3.1.1-4: Cell specific test parameters for NR SCell for known FR1 SCell activation case, 160ms SCell measurement cycle

Parameter		Unit	Cell 3		
			T1	T2	T3
SSB ARFCN			freq2		
Duplex mode	$Config_{SCell}$ 1		FDD		
	$Config_{SCell}$ 2,3		TDD		
TDD configuration	$Config_{SCell}$ 1		Not Applicable		
	$Config_{SCell}$ 2		TDDConf.1.1		
	$Config_{SCell}$ 3		TDDConf.2.1		
$BW_{channel}$	$Config_{SCell}$ 1	MHz	Note 7		
	$Config_{SCell}$ 2		Note 7		
	$Config_{SCell}$ 3		Note 7		
$BW_{occupied}$	$Config_{SCell}$ 1	RB	52 Note 5		
	$Config_{SCell}$ 2		52 Note 5		

	$Config_{SCell}$ 3		106 Note 6
DL initial BWP configuration	$Config_{SCell}$ 1-3		DLBWP.0.1
DL dedicated BWP configuration	$Config_{SCell}$ 1-3		DLBWP.1.1
UL initial BWP configuration	$Config_{SCell}$ 1-3		ULBWP.0.1
UL dedicated BWP configuration	$Config_{SCell}$ 1-3		ULBWP.1.1
DRX Cycle		ms	Not Applicable
PDSCH Reference measurement channel	$Config_{SCell}$ 1		SR.1.1 FDD
	$Config_{SCell}$ 2		SR.1.1 TDD
	$Config_{SCell}$ 3		SR.2.1 TDD
RMSI CORESET Reference Channel	$Config_{SCell}$ 1		CR.1.1 FDD
	$Config_{SCell}$ 2		CR.1.1 TDD
	$Config_{SCell}$ 3		CR.2.1 TDD
RMC CORESET Reference Channel	$Config_{SCell}$ 1		CCR.1.1 FDD
	$Config_{SCell}$ 2		CCR.1.1 TDD
	$Config_{SCell}$ 3		CCR.2.1 TDD
TRS configuration	$Config_{SCell}$ 1		TRS.1.1 FDD
	$Config_{SCell}$ 2		TRS.1.1 TDD
	$Config_{SCell}$ 3		TRS.1.2 TDD
OCNG Patterns	$Config_{SCell}$ 1,2		OP.1 Note 5
	$Config_{SCell}$ 3		OP.1 Note 6
SMTC configuration			SMTC.1
SSB configuration	$Config_{SCell}$ 1,2		SSB.1 FR1
	$Config_{SCell}$ 3		SSB.2 FR1
CSI-RS configuration for CSI reporting	$Config_{SCell}$ 1		CSI-RS.1.1 FDD
	$Config_{SCell}$ 2		CSI-RS.1.1 TDD
	$Config_{SCell}$ 3		CSI-RS.2.1 TDD
PDSCH/PDCCH subcarrier spacing	$Config_{SCell}$ 1,2	kHz	15
	$Config_{SCell}$ 3		30
reportConfigType	$Config_{SCell}$ 1-3		periodic
reportQuantity	$Config_{SCell}$ 1-3		cri-RI-PMI-CQI
CSI reporting periodicity	$Config_{SCell}$ 1,2	slot	5
	$Config_{SCell}$ 3		10
CSI reporting offset	$Config_{SCell}$ 1,2	slot	2
	$Config_{SCell}$ 3		4
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS Note1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} Note2		dBm/15kHz	-104
N_{oc} Note2	$Config_{SCell}$ 1,2	dBm/SCS	-104
	$Config_{SCell}$ 3		-101
$\hat{E}_s / I_{ot}$		dB	17
$\hat{E}_s / N_{oc}$		dB	17
SS-RSRP Note3	$Config_{SCell}$ 1,2	dBm/SCS	-87
	$Config_{SCell}$ 3		-84

SCH_RP Note 3		dBm/15 kHz	-87
Io Note3	$Config_{SCell}$ 1,2	dBm/9.36MHz	-58.96
	$Config_{SCell}$ 3	dBm/38.16MHz	-52.87
Propagation condition		-	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.

Note 3: SS-RSRP, Io and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.]

Note 5: All UL/DL transmission shall be confined within $BW_{channel_actual\text{-}occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.

Note 6: All UL/DL transmission shall be confined within $BW_{channel_actual\text{-}occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.

Note 7: $N_{RB,c}$. is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.

A.4.5.3.1.2 Test Requirements

During T2 the UE shall send the first CSI report for SCell in the first available uplink resource after slot (m+k). UE is allowed to postpone CSI report to next available uplink resource if an available uplink resource is subject to interruption. Whether CSI report in slot (m+k) was interrupted is checked by monitoring ACK/NACK sent in PCell in slot (m+k).

During T2 the UE shall start sending CSI reports for SCell with non-zero CQI index at latest in a slot m + $\frac{T_{HARQ}+T_{activtion_time}+T_{CSI_Reporting}}{NR\ slot\ length}$, $T_{activation_time} = T_{FirstSSB} + 5ms$, as defined in clause 8.3.

During T3 the UE shall stop sending CSI reports for SCell at latest in a slot n + $\frac{T_{HARQ}+3ms}{NR\ slot\ length}$, as defined in clause 8.3.

During T2 interruption of PSCell during SCell activation shall not happen outside the slot $m + 1 + \frac{T_{HARQ}}{\text{NR slot length}}$ to $m + 1 + \frac{T_{HARQ}+3ms+T_X}{\text{NR slot length}} + N_{interruption}$, and interruption of E-UTRA PCell during SCell activation shall not happen outside the subframe $m_1 + 1 + \frac{T_{HARQ}}{\text{EUTRA slot length}}$ to subframe $m_2 + 1 + \frac{T_{HARQ}+3ms+T_X}{\text{EUTRA slot length}} + N_{interruption}$, as defined in clause 8.3.

During T3 the starting point of interruption of PSCell during SCell deactivation shall not happen outside the slot n + $1 + \frac{T_{HARQ}}{NR\ slot\ length}$ to n + $1 + \frac{T_{HARQ}+3ms}{NR\ slot\ length}$, as defined in clause 8.3 and the starting point of interruption of E-UTRA PCell during SCell deactivation shall not happen outside the subframe $n_1 + 1 + \frac{T_{HARQ}}{EUTRA\ subframe\ length}$ to subframe $n_2 + 1 + \frac{T_{HARQ}+3ms}{EUTRA\ subframe\ length}$.

The interruption of PSCell shall not be more than the values specified for EN-DC in Clause 8.2.1.2.4.

All of the above test requirements shall be fulfilled in order for the observed SCell activation delay and SCell deactivation delay to be counted as correct. The rate of correct observed SCell activation delay and SCell deactivation delay during repeated tests shall be at least 90%.

NOTE: During T2 if there are no uplink resources for reporting the valid CSI in a slot m + $\frac{T_{HARQ}+T_{activtion_time}+T_{CSI_Reporting}}{NR\ slot\ length}$ as defined in clause 8.3 then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

A.4.5.3.2 SCell Activation and deactivation of known SCell in FR1 for 640ms SCell measurement cycle

A.4.5.3.2.1 Test Purpose and Environment

The purpose of this test case is the same as for the test defined in clause A.4.5.3.1.1. The supported test configurations are the same as defined in clause A.4.5.3.1.1. The test parameters are the same except those described in the following clause. The listed parameter values in Tables A.4.5.3.2.1-1 will replace the values of corresponding parameters in Tables A.4.5.3.1.1-2.

Table A.4.5.3.2.1-1: General test parameters for known FR1 SCell activation case, 640ms SCell measurement cycle

Parameter	Unit	Value	Comment
SCell measurement cycle (measCycleSCell)	ms	640	

A.4.5.3.2.2 Test Requirements

The test requirements defined in clause A.4.5.3.1.2 shall apply to this test case, except $T_{activation_time}$ will be replaced with the value $T_{FirstSSB_MAX} + T_{rs} + 5ms$.

A.4.5.3.3 SCell Activation and deactivation of unknown SCell in FR1

A.4.5.3.3.1 Test Purpose and Environment

The purpose of this test is to verify that the SCell activation and deactivation times are within the requirements stated in clause 8.3, when the SCell in FR1 is unknown by the UE at the time of activation.

The supported test configurations are defined in clause A.4.5.3.1.1. The test parameters are the same except those described in the following clause. The listed parameter values in Tables A.4.5.3.3.1-1 will replace the values of corresponding parameters in Tables A.4.5.3.1.1-2. The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are three carriers, E-UTRA has one cell, NR has two cells. Cell 1 and Cell 2 have constant signal levels throughout the test. Before the test starts the UE is connected to Cell 1 (PCell) on E-UTRAN and Cell 2 (PSCell) on NR, but is not aware of Cell 3 (SCell) on NR. The UE is monitoring the PCell and PSCell. The UE shall be continuously scheduled in the PCell and PSCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 3) becomes configured on NR. During T1 the SCell is powered off and UE is not aware of SCell.

A MAC message for activation of SCell is sent by the test equipment 100ms after the RRC message, in a slot # denoted m. The point in time at which the MAC message for activation of SCell is received at the UE antenna connector defines the start of time period T2. The UE shall be able to report valid CSI for the activated SCell at latest in slot m + $\frac{T_{HARQ}+T_{activtion_time}+T_{CSI_Reporting}}{NR\ slot\ length}$ as defined in clause 8.3 provided the SCell can be successfully detected on the first attempt. The UE shall start reporting CSI after at least one CSI-RS transmission occasion for channel measurement and reporting after slot (m+k) and shall report CQI index 0 (out-of-range) until the SCell activation has been completed. Any PSCell interruption due to activation of SCell shall occur in the slot $m + 1 + \frac{T_{HARQ}}{\text{NR slot length}}$ to slot $m + 1 + \frac{T_{HARQ}+3ms+T_X}{\text{NR slot length}} + N_{interruption}$, as defined in clause 8.3, where $N_{interruption}$ is the interruption length given in clause 8.2. Any E-UTRA PCell interruption due to activation of SCell shall occur in the subframe $m_1 + 1 + \frac{T_{HARQ}}{\text{EUTRA slot length}}$ to subframe $m_2 + 1 + \frac{T_{HARQ}+3ms+T_X}{\text{EUTRA slot length}} + N_{interruption}$, where m_1 and m_2 are the index of the first and last subframe of E-UTRA PCell which overlaps with slot m, and $N_{interruption}$ is the interruption length given in TS 36.133 [14] clause 7.32.

Time period T3 starts when a MAC message for deactivation of the SCell, sent from the test equipment to the UE in a slot # denoted n, is received at the UE antenna connector. The UE shall carry out deactivation of the SCell at latest

in slot n + $\frac{\mathrm{T_{HARQ}}+3ms}{NR\ slot\ length}$ as defined in clause 8.3. The starting point of any PSCell interruption due to the deactivation shall occur in the slot n + 1 + $\frac{\mathrm{T_{HARQ}}}{NR\ slot\ length}$ to n + 1 + $\frac{\mathrm{T_{HARQ}}+3\mathrm{ms}}{NR\ slot\ length}$, as defined in clause 8.3. The starting point of any E-UTRA PCell interruption due to the deactivation shall occur in the subframe $n_1 + 1 + \frac{T_{\mathrm{HARQ}}}{EUTRA\ subframe\ length}$ to subframe $n_2 + 1 + \frac{T_{\mathrm{HARQ}}+3\mathrm{ms}}{EUTRA\ subframe\ length}$, where n_1 and n_2 are the index of the first and last subframe of E-UTRA PCell which overlaps with slot n.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The test equipment verifies the deactivation time by counting the slots from the time when the SCell1 deactivation command is sent until CSI reporting for SCell1 is discontinued.

Table A.4.5.3.3.1-1: General test parameters for unknown FR1 SCell activation case, 160ms SCell measurement cycle

Parameter	Unit	Value	Comment
T1	ms	100	During this time the PSCell shall be known and the SCell configured, but not detected.

A.4.5.3.3.2 Test Requirements

The test requirements defined in clause A.4.5.3.1.2 shall apply to this test case, except $T_{activation_time}$ will be replaced with the value $T_{FirstSSB_MAX} + T_{SMTC_MAX} + 2*T_{rs}$ + 5ms as defined in clause 8.3.

A.4.5.3.4 SCell Activation and deactivation of multiple unknown SCells in FR1 with single activation/deactivation command

A.4.5.3.4.1 Test Purpose and Environment

The purpose of this test is to verify that the multiple SCell activation and deactivation times are within the requirements stated in clause 8.3.7 and 8.3.8, when the two configured deactivated SCells in FR1 are unknown by the UE at the time of activation.

The supported test configurations are the same as defined in clause A.4.5.3.1.1. The test parameters are the same except those described in the following clause. The listed parameter values in Table A.4.5.3.4.1-1 will replace the values of corresponding parameters in Table A.4.5.3.1.1-2. The cell specific test parameter values in Table A.4.5.3.4.1-2 will replace the values of corresponding parameters in Table A.4.5.3.1.1-3.

The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are four carriers, E-UTRA has one cell, NR has three cells. Cell 1 and Cell 2 have constant signal levels throughout the test. Before the test starts the UE is connected to Cell 1 (PCell) on E-UTRAN and Cell 2 (PSCell) on NR, but is not aware of Cell 3 (SCell) and Cell 4(SCell) on NR. The UE is monitoring the PCell and PSCell. The UE shall be continuously scheduled in the PCell and PSCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the SCells (Cell 3 and Cell 4) become configured on NR. During T1 the SCells (Cell 3 and Cell 4) are powered off and UE is not aware of SCells.

A MAC message for activation of SCells(Cell 3 and Cell 4) is sent by the test equipment 100ms after the RRC message, in a slot # denoted m. The point in time at which the MAC message for activation of SCells is received at the UE antenna connector defines the start of time period T2. Immediately at beginning of T2 the transmission power of cell 3 and cell 4 are increased to same level as for cell 2. The UE shall be able to report valid CSI for the activated SCells (Cell3 and Cell 4) at latest in slot m + $\frac{T_{HARQ}+T_{activation_time_multiple_scells}+T_{CSI_Reporting}}{NR\ slot\ length}$ respectively as defined in clause 8.3.7 provided the SCells can be successfully detected on the first attempt. The UE shall start reporting CSI for cell 3 and cell 4 after at least one CSI-RS transmission occasion for channel measurement and

reporting after slot (m+k) and shall report CQI index 0 (out-of-range) until the SCell activation for cell 3 and cell 4 has been completed, respectively. Any PSCell interruption due to activation of SCells shall occur in the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to slot $m + 1 + \frac{T_{\text{HARQ}}+3\text{ms}+T_{\text{X}}}{\text{NR slot length}} + N_{\text{interruption}}$, as defined in clause 8.3, where $N_{\text{interruption}}$ is the interruption length given in section 8.2. Any E-UTRA PCell interruption due to activation of SCells shall occur in the subframe $m_1 + 1 + \frac{T_{\text{HARQ}}}{\text{EUTRA slot length}}$ to subframe $m_2 + 1 + \frac{T_{\text{HARQ}}+3\text{ms}+T_{\text{X}}}{\text{EUTRA slot length}} + N_{\text{interruption}}$, where m_1 and m_2 are the index of the first and last subframe of E-UTRA PCell which overlaps with slot m, and $N_{\text{interruption}}$ is the interruption length given in TS 36.133 [14] clause 7.32.

Time period T3 starts when a MAC message for deactivation of the SCells (Cell 3 and Cell 4), sent from the test equipment to the UE in a slot # denoted n, is received at the UE antenna connector. The UE shall carry out deactivation of the SCells at latest in slot $\text{n} + \frac{\text{T}_{\text{HARQ}}+3ms}{NR\ slot\ length}$ as defined in clause 8.3. The starting point of any PSCell interruption due to the deactivation shall occur in the slot $\text{n} + 1 + \frac{\text{T}_{\text{HARQ}}}{NR\ slot\ length}$ to $\text{n} + 1 + \frac{\text{T}_{\text{HARQ}}+3\text{ms}}{NR\ slot\ length}$, as defined in clause 8.3. The starting point of any E-UTRA PCell interruption due to the deactivation shall occur in the subframe $n_1 + 1 + \frac{T_{\text{HARQ}}}{EUTRA\ subframe\ length}$ to subframe $\text{n}_2 + 1 + \frac{T_{\text{HARQ}}+3\text{ms}}{EUTRA\ subframe\ length}$, where n_1 and n_2 are the index of the first and last subframe of E-UTRA PCell which overlaps with slot n.

The test equipment verifies the activation time for Cell 3 by counting the slots from the time when the SCell activation command is sent until CSI report of acticated Cell 3 with other than CQI index 0 is received.

The test equipment verifies the activation time for Cell 4 by counting the slots from the time when the SCell activation command is sent until CSI report of acticated Cell 4 with other than CQI index 0 is received.

The test equipment verifies the deactivation time for Cell 3 by counting the slots from the time when the SCell deactivation command is sent until CSI reporting for Cell 3 is discontinued.

The test equipment verifies the deactivation time for Cell 4by counting the slots from the time when the SCell deactivation command is sent until CSI reporting for Cell 4 is discontinued.

Table A.4.5.3.4.1-1: General test parameters for unknown FR1 SCell activation case with 2 deactivated SCells, 160ms SCell measurement cycle

Parameter	Unit	Value	Comment
Configured deactivated SCell 1		Cell 3	Configured deactivated secondary cell on NR RF channel number 3 which is an intra-band contiguous CC to PSCC of Cell 2; *ssb-PositionInBurst* of Cell 3 is same as the one for Cell 2
Configured deactivated SCell 2		Cell 4	Configured deactivated secondary cell on NR RF channel number 4 which is an inter-band CC to PSCC of Cell 2
Cell3 timing offset to cell2	µs	0	
Cell4 timing offset to cell2	µs	0	
Time alignment error between cell3 and cell2	µs	≤ Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
Time alignment error between cell4 and cell2	µs	≤ Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
T1	ms	100	During this time the PSCell shall be known and the SCell configured, but not detected.

Table A. 4.5.3.4.1-2: Cell specific test parameters for known FR1 SCell activation case, 160ms SCell measurement cycle

Parameter		Unit	Cell 3		Cell 4	
			T2	T3	T2	T3
SSB ARFCN			Freq2		Freq3	
Duplex mode	Config 1,4		FDD			
	Config 2,3,5,6		TDD			
TDD configuration	Config 1,4		Not Applicable			
	Config 2,5		TDDConf.1.1			
	Config 3,6		TDDConf.2.1			
$BW_{channel}$	Config 1,4	MHz	10: $N_{RB,c}$ = 52			
	Config 2,5		10: $N_{RB,c}$ = 52			
	Config 3,6		40: $N_{RB,c}$ = 106			
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1			
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1			
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1			
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1			
DRX Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD		SR.1.1 FDD	
	Config 2,5		SR.1.1 TDD		SR.1.1 TDD	
	Config 3,6		SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD		CR.1.1 FDD	
	Config 2,5		CR.1.1 TDD		CR.1.1 TDD	
	Config 3,6		CR.2.1 TDD		CR.2.1 TDD	
RMC CORESET Reference Channel	Config 1,4		CCR.1.1 FDD		CCR.1.1 FDD	
	Config 2,5		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3,6		CCR.2.1 TDD		CCR.2.1 TDD	
TRS configuration	Config 1,4		TRS.1.1 FDD		TRS.1.1 FDD	
	Config 2,5		TRS.1.1 TDD		TRS.1.1 TDD	
	Config 3,6		TRS.1.2 TDD		TRS.1.2 TDD	
OCNG Patterns			OP.1			
SMTC configuration			SMTC.1			
SSB configuration	Config 1,2,4,5		SSB.1 FR1			
	Config 3,6		SSB.2 FR1			
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15 kHz			
	Config 3,6		30kHz			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-104			
	Config 1,2,4,5		-104			

N_{oc} Note2	Config 3,6	dBm/SCS	-101
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
SS-RSRP Note3	Config 1,2,4,5	dBm/SCS	-87
	Config 3,6		-84
SCH_RP Note 3		dBm/15 kHz	-87
Propagation condition		-	AWGN

A.4.5.3.3.2 Test Requirements

The test requirements defined in clause A.4.5.3.1.2 shall apply to this test case for both Cell 3 and Cell 4, except the followings:

- For Cell 3 activation delay, $T_{activation_time}$ will be replaced with the value $T_{activation_time_multiple_scells} = T_{FirstSSB_MAX_multiple_scells} + T_{SMTC_MAX_multiple_scells} + T_{rs}$ +5ms as defined in clause 8.3.7.
- For Cell 4 activation delay, $T_{activation_time}$ will be replaced with the value $T_{activation_time_multiple_scells} = T_{FirstSSB_MAX_multiple_scells} + T_{SMTC_MAX_multiple_scells} + 2*T_{rs}$ +5ms as defined in clause 8.3.7.

A.4.5.3.5 Direct SCell activation at SCell addition of known SCell in FR1

A.4.5.3.5.1 Test Purpose and Environment

The purpose of this test is to verify that the direct SCell activation time is within the requirements stated in clause 8.3.4, when the SCell in FR1 is known by the UE at the time of activation.

The supported test configurations for LTE PCell and NR PSCell are shown in table A.4.5.3.5.1-1 below. The supported test configurations for NR SCell are shown in table A.4.5.3.5.1-1A below. Test configuration for LTE PCell and NR PSCell and test configuration for NR SCell are chosen independently. The test parameters are given in Tables A.4.5.3.5.1-2 and cell-specific parameters in A.4.5.3.5.1-3 and A.4.5.3.5.1-4 below. The test consists of two successive time periods, with duration of T1 and T2, respectively. There are three carriers, E-UTRA has one cell, NR has two cells. All cells have constant signal levels throughout the test. Before the test starts the UE is connected to Cell 1 (PCell) on E-UTRA and Cell 2 (PSCell) on NR, but is not aware of Cell 3 (SCell) on NR. The UE is monitoring the PCell and PSCell. The UE shall be continuously scheduled in the PCell and PSCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the measurement on Cell 3 is configured. The UE now starts measuring the Cell 3. During T1, Cell 3 should be detected and measured by the UE such that it meets the condition for known cell defined in clause 8.3.4 for direct SCell activation. At the end of T1, the test equipment sends an RRC message for direct SCell activation of the Cell 3.

The point in time at which the RRC message for direct SCell actvation is received at the UE antenna connector, in a slot # denoted m, defines the start of time period T2. The UE shall be able to report valid CSI in PSCell for the activated SCell at latest in slot $m + \frac{N_{\text{direct}}}{\text{NR slot length}}$, as defined in clause 8.3.4. The UE shall start reporting CSI in PSCell in slot ($m+k+T_{RRC_process}$) and shall report CQI index 0 (out-of-range) until the SCell activation has been completed. Any PSCell interruption due to activation of SCell shall occur in the slot $m + 1$ to slot $m + 1 + \frac{T_{RRC_Process} + T_1 + T_X}{NR\ slot\ length} + N_{\text{interruption}}$, as defined in clause 8.3.4, where $N_{\text{interruption}}$ is the interruption length given in clause 8.2. Any E-UTRA PCell interruption due to activation of SCell shall occur in the subframe $m_1 + 1$ to subframe $m_2 + 1 + \frac{T_{RRC_Process} + T_1 + T_X}{NR\ slot\ length} + N_{\text{interruption}}$, where m_1 and m_2 are the index of the first and last subframe of E-UTRA PCell which overlaps with slot m, and $N_{\text{interruption}}$ is the interruption length given in TS 36.133 [14] clause 7.32.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PSCell during activation of SCell.

The test equipment verifies the activation time by counting the slots from the time when the direct SCell activation command is sent until a CSI report with other than CQI index 0 is received.

Table A.4.5.3.5.1-1: known FR1 direct SCell activation supported test configurations for LTE PCell and NR PSCell

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration.	

Table A.4.5.3.5.1-1A: known FR1 direct SCell activation supported test configurations for NR SCell

$Config_{SCell}$	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration	

Table A.4.5.3.5.1-2: General test parameters for known FR1 direct SCell activation

Parameter	Unit	Value	Comment
RF Channel Number		1,2,3	One E-UTRAN radio channel (1) and two NR radio channel (2,3) are used for this test
Active PCell		Cell 1	Primary cell on E-UTRAN RF channel number 1. As specified in clause A.3.7.2.1
Active PSCell		Cell 2	Primary secondary cell on NR RF channel number 2.
SCell		Cell 3	Secondary cell on NR RF channel number 3
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
CQI/PMI periodicity and offset configuration index		0	CQI reporting for SCell every four slots.
Cell-individual offset for cells on E-UTRA RF channel number	dB	0	Individual offset for cells on primary component carrier.
Cell-individual offset for cells on NR channel number	dB	0	Individual offset for cells on secondary component carrier.
SCell measurement cycle (measCycleSCell)	ms	160	
Cell3 timing offset to cell2	μs	0	

Time alignment error between cell3 and cell2	μs	≤ Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
T1	s	7	During this time the Cell 3 shall be known.
T2	s	1	During this time the UE shall activate the SCell.
T_{HARQ}	ms	k_1×NR slot length	k_1 is a number of slots indicated by the PDSCH-to-HARQ_feedback timing indicator field in a corresponding DCI format or provided by *dl-DataToUL-ACK* if the PDSCH-to-HARQ feedback timing field is not present in the DCI format, the value is defined in 38.213 [3]
$T_{CSI_Reporting}$	ms	2	the delay uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2]
k	ms	$k_1 + 3 \cdot N_{\text{slot}}^{\text{subframe},\ \mu} + 1$	As specified in clause 4.3 of TS 38.213 [3]

Table A.4.5.3.5.1-3: Cell specific test parameters for NR PSCell for known FR1 direct SCell activation

Parameter		Unit	Cell 2		
			T1	T2	T3
SSB ARFCN			**freq1**		
Duplex mode	Config 1,4		FDD		
	Config 2,3,5,6		TDD		
TDD configuration	Config 1,4		Not Applicable		
	Config 2,5		TDDConf.1.1		
	Config 3,6		TDDConf.2.1		
$BW_{channel}$	Config 1,4	MHz	10: $N_{RB,c}$ = 52		
	Config 2,5		10: $N_{RB,c}$ = 52		
	Config 3,6		40: $N_{RB,c}$ = 106		
DL initial BWP configuration	Config 1,2,3,4,5,6		DLBWP.0.1		
DL dedicated BWP configuration	Config 1,2,3,4,5,6		DLBWP.1.1		
UL initial BWP configuration	Config 1,2,3,4,5,6		ULBWP.0.1		
UL dedicated BWP configuration	Config 1,2,3,4,5,6		ULBWP.1.1		
DRx Cycle		ms	Not Applicable		
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD		
	Config 2,5		SR.1.1 TDD		
	Config 3,6		SR.2.1 TDD		
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD		
	Config 2,5		CR.1.1 TDD		
	Config 3,6		CR.2.1 TDD		
RMC CORESET Reference Channel	Config 1,4		CCR.1.1 FDD		
	Config 2,5		CCR.1.1 TDD		
	Config 3,6		CCR.2.1 TDD		
TRS configuration	Config 1,4		TRS.1.1 FDD		
	Config 2,5		TRS.1.1 TDD		
	Config 3,6		TRS.1.2 TDD		
OCNG Patterns			OP.1		

SMTC configuration			SMTC.1
SSB configuration	Config 1,2,4,5		SSB.1 FR1
	Config 3,6		SSB.2 FR1
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15 kHz
	Config 3,6		30kHz
CSI-RS configuration for CSI reporting	Config 1,4		CSI-RS.1.1 FDD
	Config 2,5		CSI-RS.1.1 TDD
	Config 3,6		CSI-RS.2.1 TDD
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15
	Config 3,6		30
reportConfigType	Config 1-6		periodic
reportQuantity	Config 1-6		cri-RI-PMI-CQI
CSI reporting periodicity	Config 1,2,4,5	slot	5
	Config 3,6		10
CSI reporting offset	Config 1,2,4,5	slot	2
	Config 3,6		4
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} Note2		dBm/15kHz	-104
N_{oc} Note2	Config 1,2,4,5	dBm/SCS	-104
	Config 3,6		-101
$\hat{E}_s / I_{ot}$		dB	17
$\hat{E}_s / N_{oc}$		dB	17
SS-RSRP Note3	Config 1,2,4,5	dBm/SCS	-87
	Config 3,6		-84
SCH_RP Note 3		dBm/15 kHz	-87
Propagation condition		-	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.

Table A.4.5.3.5.1-4: Cell specific test parameters for NR SCell for known FR1 direct SCell activation

Parameter		Unit	Cell 3		
			T1	T2	T3
SSB ARFCN			**freq2**		
Duplex mode	$Config_{SCell}$ 1		FDD		
	$Config_{SCell}$ 2,3		TDD		

TDD configuration	$Config_{SCell}$ 1		Not Applicable
	$Config_{SCell}$ 2		TDDConf.1.1
	$Config_{SCell}$ 3		TDDConf.2.1
$BW_{channel}$	$Config_{SCell}$ 1	MHz	10: $N_{RB,c}$ = 52
	$Config_{SCell}$ 2		10: $N_{RB,c}$ = 52
	$Config_{SCell}$ 3		40: $N_{RB,c}$ = 106
DL initial BWP configuration	$Config_{SCell}$ 1,2,3		DLBWP.0.1
DL dedicated BWP configuration	$Config_{SCell}$ 1,2,3		DLBWP.1.1
UL initial BWP configuration	$Config_{SCell}$ 1,2,3		ULBWP.0.1
UL dedicated BWP configuration	$Config_{SCell}$ 1,2,3		ULBWP.1.1
DRX Cycle		ms	Not Applicable
PDSCH Reference measurement channel	$Config_{SCell}$ 1		SR.1.1 FDD
	$Config_{SCell}$ 2		SR.1.1 TDD
	$Config_{SCell}$ 3		SR.2.1 TDD
RMSI CORESET Reference Channel	$Config_{SCell}$ 1		CR.1.1 FDD
	$Config_{SCell}$ 2		CR.1.1 TDD
	$Config_{SCell}$ 3		CR.2.1 TDD
RMC CORESET Reference Channel	$Config_{SCell}$ 1		CCR.1.1 FDD
	$Config_{SCell}$ 2		CCR.1.1 TDD
	$Config_{SCell}$ 3		CCR.2.1 TDD
TRS configuration	$Config_{SCell}$ 1		TRS.1.1 FDD
	$Config_{SCell}$ 2		TRS.1.1 TDD
	$Config_{SCell}$ 3		TRS.1.2 TDD
OCNG Patterns			OP.1
SMTC configuration			SMTC.1
SSB configuration	$Config_{SCell}$ 1,2		SSB.1 FR1
	$Config_{SCell}$ 3		SSB.2 FR1
PDSCH/PDCCH subcarrier spacing	$Config_{SCell}$ 1,2	kHz	15
	$Config_{SCell}$ 3		30
CSI-RS configuration for CSI reporting	$Config_{SCell}$ 1		CSI-RS.1.1 FDD
	$Config_{SCell}$ 2		CSI-RS.1.1 TDD
	$Config_{SCell}$ 3		CSI-RS.2.1 TDD
PDSCH/PDCCH subcarrier spacing	$Config_{SCell}$ 1,2	kHz	15
	$Config_{SCell}$ 3		30
reportConfigType	$Config_{SCell}$ 1-3		periodic
reportQuantity	$Config_{SCell}$ 1-3		cri-RI-PMI-CQI
CSI reporting periodicity	$Config_{SCell}$ 1,2	slot	5
	$Config_{SCell}$ 3		10
CSI reporting offset	$Config_{SCell}$ 1,2	slot	2
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			

N_{oc} Note2		dBm/15kHz	-104
N_{oc} Note2	$Config_{SCell}$ 1,2	dBm/SCS	-104
	$Config_{SCell}$ 3		-101
$\hat{E}_s / I_{ot}$		dB	17
$\hat{E}_s / N_{oc}$		dB	17
SS-RSRP Note3	$Config_{SCell}$ 1,2	dBm/SCS	-87
	$Config_{SCell}$ 3		-84
SCH_RP Note 3		dBm/15 kHz	-87
Propagation condition		-	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.			

A.4.5.3.5.2 Test Requirements

During T2 the UE shall send the first CSI report for SCell in the first available uplink resource after slot ($m+k+T_{RRC_process}$). UE is allowed to postpone CSI report to next available uplink resource if an available uplink resource is subject to interruption. Whether CSI report in slot ($m+k+T_{RRC_process}$) was interrupted is checked by monitoring ACK/NACK sent in PCell in slot ($m+k+T_{RRC_process}$).

During T2 the UE shall start sending CSI reports for SCell with non-zero CQI index at latest in a slot $m + \frac{N_{direct}}{NR\ slot\ length}$. $N_{direct} = T_{RRC_Process} + T_1 + T_{activation_time} + T_{CSI_Reporting}$ - 3ms, where $T_{RRC_Process}$ = 20 ms and other components are defined in clause 8.3.4.

During T2 interruption of PSCell during direct SCell activation shall not happen outside the slot $m + 1$ to $m + 1 + \frac{T_{RRC_Process}+T_1+T_X}{NR\ slot\ length} + N_{\text{interruption}}$, and interruption of E-UTRA PCell during SCell activation shall not happen outside the subframe $m_1 + 1$ to subframe $m_2 + 1 + \frac{T_{RRC_Process}+T_1+T_X}{NR\ slot\ length} + N_{\text{interruption}}$, as defined in clause 8.3.4.

The interruption of PSCell shall not be more than the values specified for EN-DC in Clause 8.2.1.2.8.

All of the above test requirements shall be fulfilled in order for the observed direct SCell activation delay to be counted as correct. The rate of correct observed direct SCell activation delay during repeated tests shall be at least 90%.

NOTE: During T2 if there are no uplink resources for reporting the valid CSI in a slot $m + \frac{T_{RRC_Process}+T_1+T_X}{NR\ slot\ length}$ as defined in clause 8.3.4 then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

A.4.5.3.3 Fast SCell Activation of known SCell in FR1 for 160ms SCell measurement cycle

A.4.5.3.3.1 Test Purpose and Environment

The purpose of this test is to verify that the fast SCell activation times are within the requirements stated in clause 8.3.16, when the SCell in FR1 is known by the UE at the time of activation.

The supported test configurations are shown in table A.4.5.3.3.1-1 below. The test parameters are given in Tables A.4.5.3.3.1-2 and cell-specific parameters in A.4.5.3.3.1-3 below. The test consists of two successive time periods, with duration of T1 and T2, respectively. There are three carriers, E-UTRA has one cell, NR has two cells. All cells have constant signal levels throughout the test. Before the test starts the UE is connected to Cell 1 (PCell) on E-UTRA and Cell 2 (PSCell) on NR, but is not aware of Cell 3 (SCell) on NR. The UE is monitoring the PCell and PSCell. The UE shall be continuously scheduled in the PCell and PSCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 3) becomes configured on NR. The UE now starts monitoring the SCell. The test equipment sends a MAC message for activation of the SCell and triggering the aperiodic CSI-RS for fast SCell activation.

The point in time at which the MAC message is received at the UE antenna connector, in a slot # denoted m, defines the start of time period T2. The UE shall be able to report valid CSI in PSCell for the activated SCell at latest in slot $m + \frac{T_{\text{HARQ}} + T_{\text{activation_time}} + T_{\text{CSI_Reporting}}}{\text{NR slot length}}$, as defined in clause 8.3. The UE shall start reporting CSI in PSCell after at least one CSI-RS transmission occasion for channel measurement and reporting after slot (m+k) and shall report CQI index 0 (out-of-range) until the SCell activation has been completed. Any PSCell interruption due to activation of SCell shall occur in the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to slot $m + 1 + \frac{T_{\text{HARQ}} + 3\text{ms} + T_{\text{X}}}{\text{NR slot length}} + N_{\text{interruption}}$, as defined in clause 8.3, where $N_{\text{interruption}}$ is the interruption length given in clause 8.2. Any E-UTRA PCell interruption due to activation of SCell shall occur in the subframe $m_1 + 1 + \frac{T_{\text{HARQ}}}{\text{EUTRA slot length}}$ to subframe $m_2 + 1 + \frac{T_{\text{HARQ}} + 3\text{ms} + T_{\text{X}}}{\text{EUTRA slot length}} + N_{\text{interruption}}$, where m_1 and m_2 are the index of the first and last subframe of E-UTRA PCell which overlaps with slot m, and $N_{\text{interruption}}$ is the interruption length given in TS 36.133 [14] clause 7.32.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PSCell during activation and deactivation of SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received.

Table A.4.5.3.3.1-1: fast known FR1 SCell activation in non-DRX for 160ms SCell measurement cycle supported test configurations

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration,	

Table A.4.5.3.3.1-2: General test parameters for fast known FR1 SCell activation case, 160ms SCell measurement cycle

Parameter	Unit	Value	Comment

RF Channel Number		1,2,3	One E-UTRAN radio channel (1) and two NR radio channel (2,3) are used for this test
Active PCell		Cell 1	Primary cell on E-UTRAN RF channel number 1. As specified in clause A.3.7.2.1
Active PSCell		Cell 2	Primary secondary cell on NR RF channel number 2.
Configured deactivated SCell		Cell 3	Configured deactivated secondary cell on NR RF channel number 3
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
Cell-individual offset for cells on E-UTRA RF channel number	dB	0	Individual offset for cells on primary component carrier.
Cell-individual offset for cells on NR channel number	dB	0	Individual offset for cells on secondary component carrier.
SCell measurement cycle (measCycleSCell)	ms	160	
Cell3 timing offset to cell2	µs	0	
Time alignment error between cell3 and cell2	µs	≤ Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
T1	s	7	During this time the PSCell shall be known and the SCell configured and detected.
T2	s	1	During this time the UE shall activate the SCell.
T_{HARQ}	ms	k_1NR slot length	k_1 is a number of slots indicated by the PDSCH-to-HARQ_feedback timing indicator field in a corresponding DCI format or provided by *dl-DataToUL-ACK* if the PDSCH-to-HARQ feedback timing field is not present in the DCI format, the value is defined in 38.213 [3]
$T_{CSI_Reporting}$	ms	15	the delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting (clause 5.2.2.5 in TS 38.214) and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2]
k	slot	$k_1 + 3 \cdot N_{\text{slot}}^{\text{subframe},\ \mu} + 1$	As specified in clause 4.3 of TS 38.213 [3]

Table A. 4.5.3.3.1-3: Cell specific test parameters for fast known FR1 SCell activation case, 160ms SCell measurement cycle

Parameter		Unit	Cell 2		Cell 3	
			T1	T2	T1	T2
SSB ARFCN			freq1		freq2	
Duplex mode	Config 1,4		FDD			
	Config 2,3,5,6		TDD			
TDD configuration	Config 1,4		Not Applicable			
	Config 2,5		TDDConf.1.1			
	Config 3,6		TDDConf.2.1			
$BW_{channel}$	Config 1,4	MHz	Note 7			

	Config 2,5		Note 7	
	Config 3,6		Note 7	
$BW_{occupied}$	Config 1,4	RB	52 Note 5	
	Config 2,5		52 Note 5	
	Config 3,6		106 Note 6	
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1	
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1	
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1	
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1	
Aperiodic CSI-RS for Scell activation	Config 1,4		N/A	TRS.1.3 FDD
	Config 2,5		N/A	TRS.1.3 TDD
	Config 3,6		N/A	TRS.1.4 TDD
gapBetweenBursts		Slot	N/A	
DRX Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	SR.1.1 FDD
	Config 2,5		SR.1.1 TDD	SR.1.1 TDD
	Config 3,6		SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	CR.1.1 FDD
	Config 2,5		CR.1.1 TDD	CR.1.1 TDD
	Config 3,6		CR.2.1 TDD	CR.2.1 TDD
RMC CORESET Reference Channel	Config 1,4		CCR.1.1 FDD	CCR.1.1 FDD
	Config 2,5		CCR.1.1 TDD	CCR.1.1 TDD
	Config 3,6		CCR.2.1 TDD	CCR.2.1 TDD
TRS configuration	Config 1,4		TRS.1.1 FDD	TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD	TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD	TRS.1.2 TDD
OCNG Patterns	Config 1,2,4,5		OP.1 Note 5	
	Config 3,6		OP.1 Note 6	
SMTC configuration			SMTC.1	
SSB configuration	Config 1,2,4,5		SSB.1 FR1	
	Config 3,6		SSB.2 FR1	
CSI-RS configuration for CSI reporting	Config 1,4		CSI-RS.1.1 FDD	
	Config 2,5		CSI-RS.1.1 TDD	
	Config 3,6		CSI-RS.2.1 TDD	
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15	
	Config 3,6		30	
reportConfigType	Config 1-6		periodic	
reportQuantity	Config 1-6		cri-RI-PMI-CQI	
CSI reporting periodicity	Config 1,2,4,5	slot	5	N/A
CSI reporting offset	Config 3,6	slot	10	N/A
	Config 1,2,4,5		2	N/A
	Config 3,6		4	N/A
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				

N_{oc} Note2		dBm/15kHz	-104
N_{oc} Note2	Config 1,2,4,5	dBm/SCS	-104
	Config 3,6		-101
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
SS-RSRP Note3	Config 1,2,4,5	dBm/SCS	-87
	Config 3,6		-84
CSI-RSRP Note3	Config 1,2,4,5	dBm/SCS	-87
	Config 3,6		-84
SCH_RP Note 3		dBm/15 kHz	-87
Propagation condition		-	AWGN
Io Note3	Config 1,2,4,5	dBm/ 9.36MHz	-58.96
	Config 3,6	dBm/ 38.16MHz	-52.87

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.
Note 3: SS-RSRP, Io and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.]
Note 5: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 6: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 7: $N_{RB,c}$. is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.

A.4.5.3.3.2 Test Requirements

During T2 the UE shall send the first CSI report for SCell in the first available uplink resource after slot (m+k). UE is allowed to postpone CSI report to next available uplink resource if an available uplink resource is subject to interruption. Whether CSI report in slot (m+k) was interrupted is checked by monitoring ACK/NACK sent in PCell in slot (m+k).

During T2 the UE shall start sending CSI reports for SCell with non-zero CQI index at latest in a slot m + $\frac{T_{HARQ}+T_{activtion_time}+T_{CSI_Reporting}}{NR\ slot\ length}$, $T_{activation_time} = T_{FirstATRS} + 5ms$, as defined in clause 8.3.

During T2 interruption of PSCell during SCell activation shall not happen outside the slot $m + 1 + \frac{T_{HARQ}}{\text{NR slot length}}$ to $m + 1 + \frac{T_{HARQ}+3ms+T_X}{\text{NR slot length}} + N_{interruption}$, and interruption of E-UTRA PCell during SCell activation shall not happen outside the subframe $m_1 + 1 + \frac{T_{HARQ}}{\text{EUTRA slot length}}$ to subframe $m_2 + 1 + \frac{T_{HARQ}+3ms+T_X}{\text{EUTRA slot length}} + N_{interruption}$, as defined in clause 8.3.

The interruption of PSCell shall not be more than the values specified for EN-DC in Clause 8.2.1.2.19.

All of the above test requirements shall be fulfilled in order for the observed SCell activation delay and SCell deactivation delay to be counted as correct. The rate of correct observed SCell activation delay during repeated tests shall be at least 90%.

NOTE: During T2 if there are no uplink resources for reporting the valid CSI in a slot m + $\frac{T_{HARQ}+T_{activtion_time}+T_{CSI_Reporting}}{NR\ slot\ length}$ as defined in clause 8.3 then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

A.4.5.3.4 Fast SCell Activation of known SCell in FR1 for 640 ms SCell measurement cycle

A.4.5.3.4.1 Test Purpose and Environment

The purpose of this test case is the same as for the test defined in clause A.4.5.3.4.1. The supported test configurations are the same as defined in clause A.4.5.3.4.1. The test parameters are the same except those described in the following clause. The listed parameter values in Tables A.4.5.3.4.1-1 will replace the values of corresponding parameters in Tables A.4.5.3.4.1-2. The listed parameter values in Tables A.4.5.3.4.1-2 will replace the values of corresponding parameters in Tables A.4.5.3.4.1-3.

Table A.4.5.3.4.1-1: General test parameters for known FR1 SCell activation case, 640 ms SCell measurement cycle

Parameter	Unit	Value	Comment
SCell measurement cycle (measCycleSCell)	ms	640	

Table A. 4.5.3.4.1-2: Cell specific test parameters for known FR1 Scell activation case, 640ms Scell measurement cycle

Parameter		Unit	Cell 2		Cell 3	
			T1	T2	T1	T2
gapBetweenBursts		Slot	2			

A.4.5.3.4.2 Test Requirements

The test requirements defined in clause A.4.5.3.4.2 shall apply to this test case, except $T_{activation_time}$ will be replaced with the value $T_{FirstATRS} + T_{gap} + T_{ATRS}$+ 5ms.

A.4.5.4 UE UL carrier RRC reconfiguration Delay

A.4.5.4.1 UE UL carrier RRC reconfiguration Delay

Table A.4.5.4.1-1 - Table A.4.5.4.1-4 : Void

A.4.5.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that when the UE receives a RRC message implying NR UL or Supplementary UL carrier configuration, the UE shall be ready to start transmission on the newly configured carrier within the time limits specified in clause 8.4.2 and 8.4.3 for configuring and deconfiguring, respectively.

There are three cells: E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and FR1 SCell (Cell 3). For SCell, both NR uplink and supplementary uplink are broadcast by *ServingCellConfigCommonSIB.* The test parameters for PSCell and SCell are given in Table A. 4.5.4.1.1-1, Table A. 4.5.4.1.1-2, Table A. 4.5.4.1.1-3 and Table A. 4.5.4.1.1-4 below. The test parameters and applicability for E-UTRAN PCell are defined in A.3.7.2. The test consists two tests. In test 1, the test consists of three time periods, with duration of T1, T2 and T3 respectively. During time duration T1, NR uplink of cell 3 is configured to UE. At the start of T2, a supplementary uplink of cell3 is

configured to UE through *RRCReconfiguration*, then UE shall start transmission both on the NR uplink and supplementary uplink. At the start of T3, the supplementary uplink is released through *RRCReconfiguration*.

In test 2, the test consists of three time periods, with duration of T1, T2 and T3 respectively. During time duration T1, supplementray uplink on cell 3 is configured to UE. At the start of T2, a NR uplink is configured to UE through *RRCReconfiguration*, then UE shall start transmission both on the NR uplink and supplementary uplink. At the start of T3, the NR uplink is released through *RRCReconfiguration*.

Table A.4.5.4.1.1-1: Supported test configurations

Configuration	PSCell (Cell2)	SCell (Cell3)
1	15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode	DL and UL: 15kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode; SUL: 15kHz SCS, ≥10 MHz bandwidth, SUL duplex mode
2	15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode	DL and UL: 15kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode; SUL: 15kHz SCS, ≥10 MHz bandwidth, SUL duplex mode
3	15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode	DL and UL: 30kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode; SUL: 30kHz SCS, ≥40 MHz bandwidth, SUL duplex mode
4	15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode	DL and UL: 15kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode; SUL: 15kHz SCS, ≥10 MHz bandwidth, SUL duplex mode
5	15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode	DL and UL: 15kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode; SUL: 15kHz SCS, ≥10 MHz bandwidth, SUL duplex mode
6	15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode	DL and UL: 30kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode; SUL: 30kHz SCS, ≥40 MHz bandwidth, SUL duplex mode
7	30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode	DL and UL: 15kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode; SUL: 15kHz SCS, ≥10 MHz bandwidth, SUL duplex mode
8	30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode	DL and UL: 15kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode; SUL: 15kHz SCS, ≥10 MHz bandwidth, SUL duplex mode
9	30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode	DL and UL: 30kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode; SUL: 30kHz SCS, ≥40 MHz bandwidth, SUL duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration,		

Table A.4.5.4.1.1-2: General test parameters for EN-DC UE UL carrier RRC reconfiguration Delay

Parameter	Unit	Test configuration	Value	Comment
RF Channel Number		Config 1,2,3, 4, 5, 6, 7, 8, 9	1, 2, 3	Three radio channels are used for these two tests.

Active cell		Config 1,2,3, 4, 5, 6, 7, 8, 9	Cell 1: E-UTRAN PCell Cell 2: FR1 PSCell Cell 3: FR1 SCell	E-UTRAN PCell on RF channel number 1 FR1 PSCell on RF channel number 2 FR1 SCell on RF channel number 3
CP length		Config 1,2,3, 4, 5, 6, 7, 8, 9	Normal	
DRX		Config 1,2,3, 4, 5, 6, 7, 8, 9	OFF	
Measurement gap pattern Id		Config 1,2,3, 4, 5, 6, 7, 8, 9	OFF	
Filter coefficient		Config 1,2,3, 4, 5, 6, 7, 8, 9	0	L3 filtering is not used
T1	s	Config 1,2,3, 4, 5, 6, 7, 8, 9	5	
T2	s	Config 1,2,3, 4, 5, 6, 7, 8, 9	5	
T3	s	Config 1,2,3, 4, 5, 6, 7, 8, 9	5	

Table A.4.5.4.1.1-3: NR Cell specific test parameters for EN-DC UE UL carrier RRC reconfiguration Delay on PSCell (Cell 2)

Parameter	Unit	Test Configuration	Test 1			Test 2		
			T1	T2	T3	T1	T2	T3
Channel number		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	2			2		
TDD configuration		Conf 1, 2, 3	N/A			N/A		
		Conf 4, 5, 6	TDD Conf.1.1			TDD Conf.1.1		
		Conf 7, 8, 9	TDD Conf.2.1			TDD Conf.2.1		
$BW_{channel}$	MHz	Conf 1, 2, 3	Note 6			Note 6		
		Conf 4, 5, 6	Note 6			Note 6		
		Conf 7, 8, 9	Note 6			Note 6		
$BW_{occupied}$	RB	Conf 1, 2, 3	52 Note 4			52 Note 4		
		Conf 4, 5, 6	52 Note 4			52 Note 4		
		Conf 7, 8, 9	106 Note 5			106 Note 5		
PDSCH reference measurement channel as defined in A.3.1.1		Conf 1, 2, 3	SR.1.1 FDD			SR.1.1 FDD		
		Conf 4, 5, 6	SR.1.1 TDD			SR.1.1 TDD		
		Conf 7, 8, 9	SR 2.1 TDD			SR 2.1 TDD		
RMSI CORESET reference measurement channel as defined in A.3.1.2		Conf 1, 2, 3	CR.1.1 FDD			CR.1.1 FDD		
		Conf 4, 5, 6	CR.1.1 TDD			CR.1.1 TDD		
		Conf 7, 8, 9	CR.2.1 TDD			CR.2.1 TDD		
RMC CORESET reference measurement channel as defined in A.3.1.3		Conf 1, 2, 3	CCR.1.1 FDD			CCR.1.1 FDD		
		Conf 4, 5, 6	CCR.1.1 TDD			CCR.1.1 TDD		
		Conf 7, 8, 9	CCR.2.1 TDD			CCR.2.1 TDD		
OCNG Pattern Note 1		Conf 1, 2, 3, 4, 5, 6	OP.1 Note 4			OP.1 Note 4		
		Config 7, 8, 9	OP.1 Note 5			OP.1 Note 5		
SSB configuration		Conf 1, 2, 3, 4, 5, 6	SSB.1 FR1			SSB.1 FR1		
		Conf 7, 8, 9	SSB.2 FR1			SSB.2 FR1		
SMTC configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	SMTC.1			SMTC.1		
CSI-RS for tracking		Conf 1	TRS.1.1 FDD			TRS.1.1 FDD		

		Conf 2	TRS.1.1 FDD			TRS.1.1 FDD			
		Conf 3	TRS.1.1 FDD			TRS.1.1 FDD			
		Conf 4	TRS.1.1 TDD			TRS.1.1 TDD			
		Conf 5	TRS.1.1 TDD			TRS.1.1 TDD			
		Conf 6	TRS.1.1 TDD			TRS.1.1 TDD			
		Conf 7	TRS.1.2 TDD			TRS.1.2 TDD			
		Conf 8	TRS.1.2 TDD			TRS.1.2 TDD			
		Conf 9	TRS.1.2 TDD			TRS.1.2 TDD			
DL initial BWP configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	DLBWP.0.1			DLBWP.0.1			
DL dedicated BWP configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	DLBWP.1.1			DLBWP.1.1			
UL dedicated BWP configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	ULBWP.1.1			ULBWP.1.1			
EPRE ratio of PSS to SSS EPRE ratio of PBCH_DMRS to SSS EPRE ratio of PBCH to PBCH_DMRS EPRE ratio of PDCCH_DMRS to SSS EPRE ratio of PDCCH to PDCCH_DMRS EPRE ratio of PDSCH_DMRS to SSS EPRE ratio of PDSCH to PDSCH_DMRS EPRE ratio of OCNG DMRS to SSS EPRE ratio of OCNG to OCNG DMRS	dB	Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	0			0			
N_{oc} Note 2	dBm / 15kHz	Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	-102			-102			
	dBm/ SCS	Conf 1,2,3,4,5,6	-102			-102			
		Conf 7,8,9	-99			-99			
$\hat{E}_s / N_{oc}$	dB	Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	16	16	16	16	16	16	
$\hat{E}_s / I_{ot}$ Note 3	dB	Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	16	16	16	16	16	16	
SS-RSRP Note 3	dBm/ SCS	Conf 1,2,3,4,5,6	-86	-86	-86	-86	-86	-86	
		Conf 7,8,9	-83	-83	-83	-83	-83	-83	
Io Note 3	dBm/ 9.36 MHz	Conf 1,2,3,4,5,6	-57.9	-57.9	-57.9	-57.9	-57.9	-57.9	
	dBm/ 38.16 MHz	Conf 7,8,9	-51.8	-51.8	-51.8	-51.8	-51.8	-51.8	
Propagation Condition		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	AWGN			AWGN			
Antenna configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	1 x 2			1 x 2			

NOTE 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. within $BW_{occupied}$
NOTE 3: $\hat{E}_s / I_{ot}$, Io, and SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
NOTE 5: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
NOTE 6: $N_{RB,c}$. is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.

Table A.4.5.4.1.1-4: NR Cell specific test parameters for EN-DC UE UL carrier RRC reconfiguration Delay on SCell (Cell 3)

Parameter	Unit	Test Configuration	Test 1			Test 2		
			T1	T2	T3	T1	T2	T3
Channel number		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	3			3		
TDD configuration		Conf 1, 4, 7	N/A			N/A		
		Conf 2, 5, 8	TDDConf.1.1			TDDConf.1.1		
		Conf 3, 6, 9	TDDConf.2.1			TDDConf.2.1		
$BW_{channel}$	MHz	Conf 1, 4, 7	Note 6			Note 6		
		Conf 2, 5, 8	Note 6			Note 6		
		Conf 3, 6, 9	Note 6			Note 6		
$BW_{occupied}$	RB	Conf 1, 4, 7	52 Note 4			52 Note 4		
		Conf 2, 5, 8	52 Note 4			52 Note 4		
		Conf 3, 6, 9	106 Note 5			106 Note 5		
PUSCH parameters for NR UL carrier		Conf 1, 4, 7	G-FR1-A3-10 in [13]	G-FR1-A3-10 in [13]	G-FR1-A3-10 in [13]	N/A	G-FR1-A3-10 in [13]	N/A
		Conf 2, 5, 8	G-FR1-A3-10 in [13]	G-FR1-A3-10 in [13]	G-FR1-A3-10 in [13]	N/A	G-FR1-A3-10 in [13]	N/A
		Conf 3, 6, 9	G-FR1-A3-14 in [13]	G-FR1-A3-14 in [13]	G-FR1-A3-14 in [13]	N/A	G-FR1-A3-14 in [13]	N/A
PUCCH parameters For NR UL carrier		Conf 1, 4, 7	Table 8.3.3.1.2-1 in [13]	Table 8.3.3.1.2-1 in [13]	Table 8.3.3.1.2-1 in [13]	N/A	N/A	N/A
		Conf 2, 5, 8	Table 8.3.3.1.2-1 in [13]	Table 8.3.3.1.2-1 in [13]	Table 8.3.3.1.2-1 in [13]	N/A	N/A	N/A
		Conf 3, 6, 9	Table 8.3.3.1.2-2 in [13]	Table 8.3.3.1.2-2 in [13]	Table 8.3.3.1.2-2 in [13]	N/A	N/A	N/A
PUSCH parameters for supplementary UL		Conf 1, 4, 7	N/A	G-FR1-A3-10 in [13]	N/A	G-FR1-A3-10 in [13]	G-FR1-A3-10 in [13]	G-FR1-A3-10 in [13]

		Conf 2, 5, 8	N/A	G-FR1-A3-10 in [13]	N/A	G-FR1-A3-10 in [13]	G-FR1-A3-10 in [13]	G-FR1-A3-10 in [13]
		Conf 3, 6, 9	N/A	G-FR1-A3-14 in [13]	N/A	G-FR1-A3-14 in [13]	G-FR1-A3-14 in [13]	G-FR1-A3-14 in [13]
PUCCH parameters for supplementary UL		Conf 1, 4, 7	N/A	N/A	N/A	Table 8.3.3.1.2-1 in [13]	Table 8.3.3.1.2-1 in [13]	Table 8.3.3.1.2-1 in [13]
		Conf 2, 5, 8	N/A	N/A	N/A	Table 8.3.3.1.2-1 in [13]	Table 8.3.3.1.2-1 in [13]	Table 8.3.3.1.2-1 in [13]
		Conf 3, 6, 9	N/A	N/A	N/A	Table 8.3.3.1.2-2 in [13]	Table 8.3.3.1.2-2 in [13]	Table 8.3.3.1.2-2 in [13]
PDSCH reference measurement channel as defined in A.3.1.1		Conf 1, 4, 7	SR.1.1 FDD			SR.1.1 FDD		
		Conf 2, 5, 8	SR.1.1 TDD			SR.1.1 TDD		
		Conf 3, 6, 9	SR 2.1 TDD			SR 2.1 TDD		
RMSI CORESET reference measurement channel as defined in A.3.1.2		Conf 1, 4, 7	CR.1.1 FDD			CR.1.1 FDD		
		Conf 2, 5, 8	CR.1.1 TDD			CR.1.1 TDD		
		Conf 3, 6, 9	CR.2.1 TDD			CR.2.1 TDD		
RMC CORESET reference measurement channel as defined in A.3.1.3		Conf 1, 4, 7	CCR.1.1 FDD			CCR.1.1 FDD		
		Conf 2, 5, 8	CCR.1.1 TDD			CCR.1.1 TDD		
		Conf 3, 6, 9	CCR.2.1 TDD			CCR.2.1 TDD		
OCNG Pattern Note 1		Conf 1, 2, 4, 5, 7, 8	OP.1 Note 4			OP.1 Note 4		
		Conf 3, 6, 9	OP.1 Note 5			OP.1 Note 5		
SSB configuration		Conf 1, 2, 4, 5, 7,8	SSB.1 FR1			SSB.1 FR1		
		Conf 3, 6, 9	SSB.2 FR1			SSB.2 FR1		
SMTC configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	SMTC.1			SMTC.1		
CSI-RS for tracking		Conf 1	TRS.1.1 FDD			TRS.1.1 FDD		
		Conf 2	TRS.1.1 TDD			TRS.1.1 TDD		
		Conf 3	TRS.1.2 TDD			TRS.1.2 TDD		
		Conf 4	TRS.1.1 FDD			TRS.1.1 FDD		
		Conf 5	TRS.1.1 TDD			TRS.1.1 TDD		
		Conf 6	TRS.1.2 TDD			TRS.1.2 TDD		
		Conf 7	TRS.1.1 FDD			TRS.1.1 FDD		
		Conf 8	TRS.1.1 TDD			TRS.1.1 TDD		
		Conf 9	TRS.1.2 TDD			TRS.1.2 TDD		
DL initial BWP configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	DLBWP.0.1			DLBWP.0.1		
DL dedicated BWP configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	DLBWP.1.1			DLBWP.1.1		
UL dedicated BWP configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	ULBWP.1.1			ULBWP.1.1		
EPRE ratio of PSS to SSS								
EPRE ratio of PBCH_DMRS to SSS								
EPRE ratio of PBCH to PBCH_DMRS								

EPRE ratio of PDCCH_DMRS to SSS	dB	Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	0			0			
EPRE ratio of PDCCH to PDCCH_DMRS									
EPRE ratio of PDSCH_DMRS to SSS									
EPRE ratio of PDSCH to PDSCH_DMRS									
EPRE ratio of OCNG DMRS to SSS									
EPRE ratio of OCNG to OCNG DMRS									
N_{oc} Note 2	dBm / 15kHz	Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	-102			-102			
	dBm/ SCS	Conf 1, 2, 4, 5, 7,8	-102			-102			
		Conf 3, 6, 9	-99			-99			
$\hat{E}_s / N_{oc}$	dB	Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	16	16	16	16	16	16	
$\hat{E}_s / I_{ot}$ Note 3	dB	Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	16	16	16	16	16	16	
SS-RSRP Note 3	dBm/ SCS	Conf 1, 2, 4, 5, 7,8	-86	-86	-86	-86	-86	-86	
		Conf 3, 6, 9	-83	-83	-83	-83	-83	-83	
Io Note 3	dBm/ 9.36 MHz	Conf 1, 2, 4, 5, 7,8	-57.9	-57.9	-57.9	-57.9	-57.9	-57.9	
	dBm/ 38.16 MHz	Conf 3, 6, 9	-51.8	-51.8	-51.8	-51.8	-51.8	-51.8	
Propagation Condition		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	AWGN			AWGN			
Antenna configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	1 x 2			1 x 2			

NOTE 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.

NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.

NOTE 3: $\hat{E}_s / I_{ot}$, Io, and SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

NOTE 4: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.

NOTE 5: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.

NOTE 6: $N_{RB,c}$. is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.

A.4.5.4.1.2 Test Requirements

In test 1 the UE shall be ready to start transmission on the supplementary uplink carrier on SCell within 20ms from the start of T2.

In test 1 the UE shall stop the transmission on the supplementary uplink carrier on SCell within 20ms from the start of T3.

In test 2 the UE shall be ready to start transmission on the NR uplink carrier on SCell within 20ms from the start of T2.

In test 2 the UE shall stop the transmission on the NR uplink carrier on SCell within 20ms from the start of T3.

All of the above test requirements shall be fulfilled in order for the observed UE UL carrier configuration delay and UE UL carrier release delay to be counted as correct. The rate of correct observed UE UL carrier configuration delay and UE UL carrier release delay during repeated tests shall be at least 90%.

A.4.5.5 Beam Failure Detection and Link recovery procedures

A.4.5.5.1 EN-DC Beam Failure Detection and Link Recovery Test for FR1 PSCell configured with SSB-based BFD and LR in non-DRX mode

A.4.5.5.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving PSCell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the PSCell, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.4.5.5.1.1-1, A.4.5.5.1.1-2, A.4.5.5.1.1-3 and A.4.5.5.1.1-4 below. There are two cells, cell 1 is the E-UTRAN PCell, and cell 2 is the PSCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.4.5.5.1.1-1 shows the variation of the downlink SNR of the PCell and the SNR of the SSB in set q_0 in the active PSCell to emulate SSB based beam failure. Figure A.4.5.5.1.1-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test 1.

Table A.4.5.5.1.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.4.5.5.1.1-2: General test parameters for FR1 PSCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter	Unit	Value	Comment
		Test 1	
Active E-UTRA PCell		Cell 1	
E-UTRA RF Channel Number		1	
Active PSCell		Cell 2	

RF Channel Number			2	
Duplex mode	Config 1, 4		FDD	
	Config 2, 3, 5, 6		TDD	
BWchannel	Config 1, 4	MHz	10: NRB,c = 52	
	Config 2, 5		10: NRB,c = 52	
	Config 3, 6		40: NRB,c = 106	
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1	
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1	
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1	
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1	
TDD Configuration	Config 1, 4		Not Applicable	
	Config 2, 5		TDDConf.1.1	
	Config 3, 6		TDDConf.2.1	
CORESET	Config 1, 4		CR.1.1 FDD	
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD	
	Config 2, 5		CR.1.1 TDD	
	Config 3, 6		CR.2.1 TDD	
Dedicated CORESET Reference	Config 1, 4		CCR.1.1 FDD	
	Config 2, 5		CCR.1.1 TDD	
SSB Configuration	Config 1, 4		SSB.3 FR1	
	Config 2, 5		SSB.3 FR1	
	Config 3, 6		SSB.4 FR1	
SMTC Configuration	Config 1, 2, 4, 5		SMTC.1	
	Config 3, 6		SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4, 5		15 KHz	
	Config 3, 6		30 KHz	
PRACH Configuration	Config 1, 2, 4, 5		Table A.3.8.2.2-1	
	Config 3, 6		Table A.3.8.2.2-1	
SSB Index assigned as BFD RS (q_0)			0	
SSB Index assigned as CBD RS (q_1)			1	
OCNG parameters			OP.1	
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0	

	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			OFF	
Gap pattern ID			gp0	
gapOffset			0	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1, 2, 4, 5	dBm/SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3, 6		-95	
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer			pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD	
	Config 2, 5		CSI-RS.1.1 TDD	
	Config 3, 6		CSI-RS.2.1 TDD	
CSI-RS for tracking	Config 1, 4		TRS.1.1 FDD	
	Config 2, 5		TRS.1.1 TDD	
	Config 3, 6		TRS.1.2 TDD	
SSB Index assigned as RLM RS			0,1	
T310 timer		ms	1000	
N310			2	
T1		s	0.2	During this time the the UE shall be fully synchronized to cell 1
T2		s	0.37	
T3		s	0.24	
T4		s	0	
T5		s	0.17	
D1		s	0.13	
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts. Note 3: E-UTRAN is in non-DRX mode under test.				

Table A.4.5.5.1.1-3: Cell specific test parameters for FR1 PSCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS	dB					
EPRE ratio of PDCCH to PDCCH DMRS	dB					
EPRE ratio of PBCH DMRS to SSS	dB					

EPRE ratio of PBCH to PBCH DMRS		dB	0				
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q_0	Config 1, 4	dB	5	-3	-12	-12	-12
	Config 2, 5		5	-3	-12	-12	-12
	Config 3, 6		5	-3	-12	-12	-12
SNR_SSB of set q_1	Config 1, 4	dB	-10	-10	10	10	10
	Config 2, 5		-10	-10	10	10	10
	Config 3, 6		-10	-10	10	10	10
SSB_RP of set q_1	Config 1, 4	dBm/SCS kHz	-108	-108	-88	-88	-88
	Config 2, 5		-108	-108	-88	-88	-88
	Config 3, 6		-105	-105	-85	-85	-85
N_{oc}	Config 1, 4	dBm/15 KHz	-98				
	Config 2, 5		-98				
	Config 3, 6		-98				
Propagation condition			TDL-C 300ns 100Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.

Table A.4.5.5.1.1-4: Void

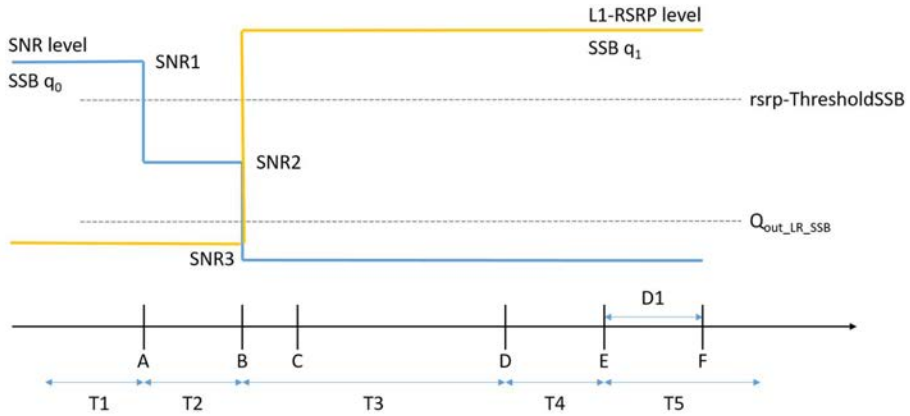

Figure A.4.5.5.1.1-1: SNR and L1-RSRP variation SSB for SSB-based beam failure detection and link recovery testing in non-DRX mode

A.4.5.5.1.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 120+10 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.5.2 EN-DC Beam Failure Detection and Link Recovery Test for FR1 PSCell configured with SSB-based BFD and LR in DRX mode

A.4.5.5.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving PSCell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the PSCell, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.4.5.5.2.1-1, A.4.5.5.2.1-2, A.4.5.5.2.1-3, A.4.5.5.2.1-4 and A.4.5.5.2.1-5 below. There are two cells, cell 1 is the E-UTRAN PCell, and cell 2 is the PSCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.4.5.5.2.1-1 shows the variation of the downlink SNR of the PCell and the SNR of the SSB in set q_0 in the active PSCell to emulate SSB based beam failure. Figure A.4.5.5.2.1-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in PSCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.4.5.5.2.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.4.5.5.2.1-2: General test parameters for FR1 PCell for SSB-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Value	Comment
			Test 1	
Active E-UTRA PCell			Cell 1	
E-UTRA RF Channel Number			1	
Active PSCell			Cell 2	
RF Channel Number			2	
Duplex mode	Config 1, 4		FDD	
	Config 2, 3, 5, 6		TDD	
BWchannel	Config 1, 4	MHz	10: NRB,c = 52	
	Config 2, 5		10: NRB,c = 52	
	Config 3, 6		40: NRB,c = 106	
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1	
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1	
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1	
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1	
TDD Configuration	Config 1, 4		Not Applicable	
	Config 2, 5		TDDConf.1.1	
	Config 3, 6		TDDConf.2.1	
CORESET Reference	Config 1, 4		CR.1.1 FDD	
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD	
	Config 2, 5		CR.1.1 TDD	
	Config 3, 6		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1, 4		CCR.1.1 FDD	
	Config 2, 5		CCR.1.1 TDD	
SSB Configuration	Config 1, 4		SSB.3 FR1	
	Config 2, 5		SSB.3 FR1	
	Config 3, 6		SSB.4 FR1	
SMTC Configuration	Config 1, 2, 4, 5		SMTC.1	
	Config 3, 6		SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4, 5		15 KHz	
	Config 3, 6		30 KHz	
PRACH Configuration	Config 1, 2, 4, 5		Table A.3.8.2.2-1	
	Config 3, 6		Table A.3.8.2.2-1	
SSB Index assigned as BFD RS (q_0)			0	
SSB Index assigned as CBD RS (q_1)			1	
OCNG parameters			OP.1	
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0	

	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			DRX.7	A.3.3.7
Gap pattern ID			N.A.	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1, 2, 4, 5	dBm/SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3, 6		-95	
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer			pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD	
	Config 2, 5		CSI-RS.1.1 TDD	
	Config 3, 6		CSI-RS.2.1 TDD	
CSI-RS for tracking	Config 1, 4		TRS.1.1 FDD	
	Config 2, 5		TRS.1.1 TDD	
	Config 3, 6		TRS.1.2 TDD	
SSB Index assigned as RLM RS			0,1	
T310 Timer		ms	1000	
N310			2	
T1		s	1	During this time the the UE shall be fully synchronized to cell 1
T2		s	5.17	
T3		s	3.24	
T4		s	0	
T5		s	1.97	
D1		s	1.93	
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts. Note 3: E-UTRAN is in non-DRX mode under test.				

Table A.4.5.5.2.1-3: Cell specific test parameters for FR1 PSCell for SSB-based beam failure detection and link recovery testing in DRX mode

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS	dB	0				
EPRE ratio of PDCCH to PDCCH DMRS	dB					
EPRE ratio of PBCH DMRS to SSS	dB					
EPRE ratio of PBCH to PBCH DMRS	dB					
EPRE ratio of PSS to SSS	dB					
EPRE ratio of PDSCH DMRS to SSS	dB					
EPRE ratio of PDSCH to PDSCH DMRS	dB					
EPRE ratio of OCNG DMRS to SSS	dB					
EPRE ratio of OCNG to OCNG DMRS	dB					

SNR_SSB of set q_0	Config 1, 4	dB	5	-3	-12	-12	-12
	Config 2, 5		5	-3	-12	-12	-12
	Config 3, 6		5	-3	-12	-12	-12
SNR_SSB of set q_1	Config 1, 4	dB	-10	-10	10	10	10
	Config 2, 5		-10	-10	10	10	10
	Config 3, 6		-10	-10	10	10	10
SSB_RP of set q_1	Config 1, 4	dBm/SCS kHz	-108	-108	-88	-88	-88
	Config 2, 5		-108	-108	-88	-88	-88
	Config 3, 6		-105	-105	-85	-85	-85
N_{oc}	Config 1, 4	dBm/15 KHz	-98				
	Config 2, 5		-98				
	Config 3, 6		-98				
Propagation condition			TDL-C 300ns 100Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Void
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.

Table A.4.5.5.2.1-4: Void

Table A.4.5.5.2.1-5: Void

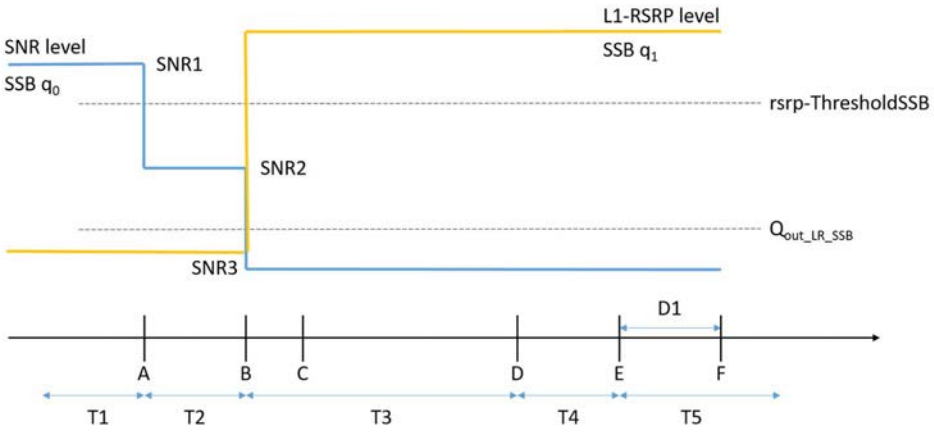

Figure A.4.5.5.2.1-1: SNR and L1-RSRP variation for SSB-based beam failure detection and link recovery testing in non-DRX mode

A.4.5.5.2.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiat link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 1920+10 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.5.3 EN-DC Beam Failure Detection and Link Recovery Test for FR1 PSCell configured with CSI-RS-based BFD and LR in non-DRX mode

A.4.5.5.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving PSCell and that the UE performs correct CSI-RS-based link recovery based on beam candicate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the PSCell, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.4.5.5.3.1-1, A.4.5.5.3.1-2, and A.4.5.5.3.1-3 below. There are two cells, cell 1 is the E-UTRAN PCell, and cell 2 is the PSCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.4.5.5.3.1-1 shows the variation of the downlink SNR of the PSCell and the SNR of the CSI-RS in set q_0 in the active PSCell to emulate CSI-RS based beam failure. Figure A.4.5.5.3.1-1 additionally shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled.

Table A.4.5.5.3.1-1: Supported test configurations for FR1 PSCell

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.4.5.5.3.1-2: General test parameters for FR1 PSCell for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Value	Comment
			Test 1	
Active PCell			Cell 1	
RF Channel Number			1	
Active PSCell			Cell 2	
RF Channel Number			2	
Duplex mode	Config 1, 4		FDD	
	Config 2, 3, 5, 6		TDD	

BWchannel	Config 1, 4	MHz	10: NRB,c = 52	
	Config 2, 5		10: NRB,c = 52	
	Config 3, 6		40: NRB,c = 106	
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1	
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1	
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1	
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1	
TDD Configuration	Config 1, 4		Not Applicable	
	Config 2, 5		TDDConf.1.1	
	Config 3, 6		TDDConf.2.1	
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD	A.3.1.2
	Config 2, 5		CR.1.1 TDD	
	Config 3, 6		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1, 4		CCR.1.1 FDD	A.3.1.3
	Config 2, 5		CCR.1.1 TDD	
	Config 3, 6		CCR.2.1 TDD	
SSB Configuration	Config 1, 4		SSB. 3 FR1	A.3.10
	Config 2, 5		SSB. 3 FR1	
	Config 3, 6		SSB. 4 FR1	
SMTC Configuration	Config 1, 2, 4, 5		SMTC.1	A.3.11
	Config 3, 6		SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4, 5		15 KHz	
	Config 3, 6		30 KHz	
PRACH Configuration	Config 1, 2, 4, 5		FR1 PRACH configuration 4	A.3.8.2
	Config 3, 6		FR1 PRACH configuration 4	A.3.8.2
csi-RS-Index assigned as beam failure detection RS in set q_0			0	
OCNG parameters			OP.1	A.3.2.1
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	

DRX			OFF	
Gap pattern ID			N.A.	
csi-RS-Index assigned as candidate beam detection RS in set q_1			1	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1, 2, 4, 5	dBm/SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3, 6		-95	
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer			pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for q_0 and q_1	Config 1, 4		CSI-RS.1.2 FDD	A.3.14
	Config 2, 5		CSI-RS.1.2 TDD	
	Config 3, 6		CSI-RS.2.2 TDD	
CSI-RS configuration for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD	A.3.14
	Config 2, 5		CSI-RS.1.1 TDD	
	Config 3, 6		CSI-RS.2.1 TDD	
TRS configuration	Config 1, 4		TRS.1.1 FDD	
	Config 2, 5		TRS.1.1 TDD	
	Config 3, 6		TRS.1.2 TDD	
csi-RS-Index assigned as RLM RS	Config 1, 4		CSI-RS.1.2 FDD	A.3.14
	Config 2, 5		CSI-RS.1.2 TDD	
	Config 3, 6		CSI-RS.2.2 TDD	
T310 Timer		ms	1000	
N310			2	
T1		s	1	During this time the the UE shall be fully synchronized to cell 1
T2		s	0.18	
T3		s	0.14	
T4		s	0	
T5		s	0.08	
D1		s	0.04	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.4.5.5.3.1-3: Cell specific test parameters for FR1 PSCell for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set q_0	Config 1, 4	dB	5	-3	-12	-12	-12

	Config 2, 5		5	-3	-12	-12	-12
	Config 3, 6		5	-3	-12	-12	-12
SNR_CSI-RS of set q_1	Config 1, 4	dB	-10	-10	10	10	10
	Config 2, 5		-10	-10	10	10	10
	Config 3, 6		-10	-10	10	10	10
CSI-RS_RP of set q_1	Config 1, 4	dBm/SCS kHz	-108	-108	-88	-88	-88
	Config 2, 5		-108	-108	-88	-88	-88
	Config 3, 6		-105	-105	-85	-85	-85
N_{oc}	Config 1, 4	dBm/15 KHz	-98				
	Config 2, 5		-98				
	Config 3, 6		-98				
Propagation condition			TDL-C 300ns 100Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Void
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.

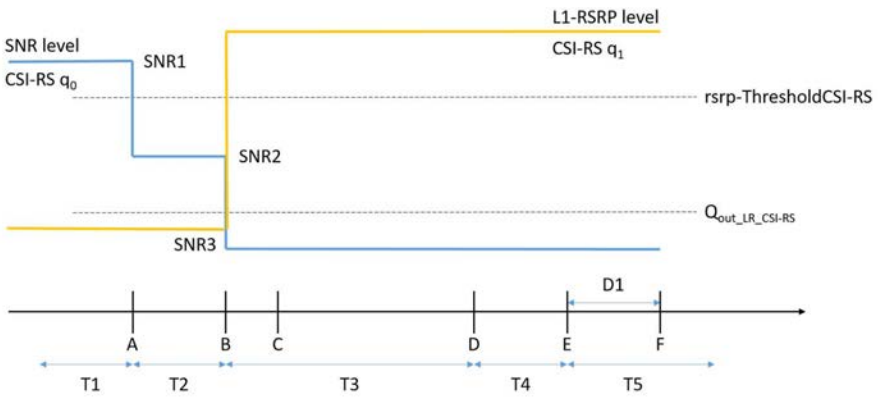

Figure A.4.5.5.3.1-1: SNR and L1-RSRP variation for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

A.4.5.5.3.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiat link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 30+10 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.5.4 EN-DC Beam Failure Detection and Link Recovery Test for FR1 PSCell configured with CSI-RS-based BFD and LR in DRX mode

A.4.5.5.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving PSCell and that the UE performs correct CSI-RS-based link recovery based on beam candicate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the PSCell, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.4.5.5.4.1-1, A.4.5.5.4.1-2, A.4.5.5.4.1-3, and A.4.5.5.4.1-4 below. There are two cells, cell 1 is the E-UTRAN PCell, and cell 2 is the PSCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.4.5.5.4.1-1 shows the variation of the downlink SNR of the PSCell and the SNR of the CSI-RS in set q_0 in the active PSCell to emulate CSI-RS based beam failure. Figure A.4.5.5.4.1-1 additionally shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in PSCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.4.5.5.4.1-1: Supported test configurations for FR1 PSCell

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.4.5.5.4.1-2: General test parameters for FR1 PSCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Value	Comment
			Test 1	
Active PCell			Cell 1	
RF Channel Number			1	
Active PSCell			Cell 2	
RF Channel Number			2	
Duplex mode	Config 1, 4		FDD	
	Config 2, 3, 5, 6		TDD	
BWchannel	Config 1, 4	MHz	10: NRB,c = 52	

	Config 2, 5		10: NRB,c = 52	
	Config 3, 6		40: NRB,c = 106	
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1	
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1	
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1	
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1	
TDD Configuration	Config 1, 4		Not Applicable	
	Config 2, 5		TDDConf.1.1	
	Config 3, 6		TDDConf.2.1	
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD	A.3.1.2
	Config 2, 5		CR.1.1 TDD	
	Config 3, 6		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1, 4		CCR.1.1 FDD	A.3.1.3
	Config 2, 5		CCR.1.1 TDD	
	Config 3, 6		CCR.2.1 TDD	
SSB Configuration	Config 1, 4		SSB. 3 FR1	A.3.10
	Config 2, 5		SSB. 3 FR1	
	Config 3, 6		SSB. 4 FR1	
SMTC Configuration	Config 1, 2, 4, 5		SMTC.1	A.3.11
	Config 3, 6		SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4, 5		15 KHz	
	Config 3, 6		30 KHz	
PRACH Configuration	Config 1, 2, 4, 5		FR1 PRACH configuration 4	A.3.8.2
	Config 3, 6		FR1 PRACH configuration 4	A.3.8.2
csi-RS-Index assigned as beam failure detection RS in set q_0			0	
OCNG parameters			OP.1	A.3.2.1
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS	dB	0	

		energy to average CSI-RS RE energy			
		DMRS precoder granularity		REG bundle size	
		REG bundle size		6	
DRX				DRX.7	A.3.3.7
Gap pattern ID				N.A.	
csi-RS-Index assigned as candidate beam detection RS in set q_1				1	
rlmInSyncOutOfSyncThreshold				absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1, 2, 4, 5		dBm/SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3, 6			-95	
powerControlOffsetSS				db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount				n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer				pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for q_0 and q_1	Config 1, 4			CSI-RS.1.2 FDD	A.3.14
	Config 2, 5			CSI-RS.1.2 TDD	
	Config 3, 6			CSI-RS.2.2 TDD	
CSI-RS configuration for CSI reporting	Config 1, 4			CSI-RS.1.1 FDD	A.3.14
	Config 2, 5			CSI-RS.1.1 TDD	
	Config 3, 6			CSI-RS.2.1 TDD	
TRS configuration	Config 1, 4			TRS.1.1 FDD	
	Config 2, 5			TRS.1.1 TDD	
	Config 3, 6			TRS.1.2 TDD	
csi-RS-Index assigned as RLM RS	Config 1, 4			CSI-RS.1.2 FDD	A.3.14
	Config 2, 5			CSI-RS.1.2 TDD	
	Config 3, 6			CSI-RS.2.2 TDD	
T310 Timer			ms	1000	
N310				2	
T1			s	1	During this time the the UE shall be fully synchronized to cell 1
T2			s	8.37	
T3			s	6.44	
T4			s	0	
T5			s	1.97	

D1	s	1.93	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.4.5.5.4.1-3: Cell specific test parameters for FR1 PSCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set q_0	Config 1, 4	dB	5	-3	-12	-12	-12
	Config 2, 5		5	-3	-12	-12	-12
	Config 3, 6		5	-3	-12	-12	-12
SNR_CSI-RS of set q_1	Config 1, 4	dB	-10	-10	10	10	10
	Config 2, 5		-10	-10	10	10	10
	Config 3, 6		-10	-10	10	10	10
CSI-RS_RP of set q_1	Config 1, 4	dBm/SCS kHz	-108	-108	-88	-88	-88
	Config 2, 5		-108	-108	-88	-88	-88
	Config 3, 6		-105	-105	-85	-85	-85
N_{oc}	Config 1, 4	dBm/15 KHz	-98				
	Config 2, 5		-98				
	Config 3, 6		-98				
Propagation condition			TDL-C 300ns 100Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Void
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.

Table A.4.5.5.4.1-4: Void

Table A.4.5.5.4.1-5: Void

Table A.4.5.5.4.1-6: Void

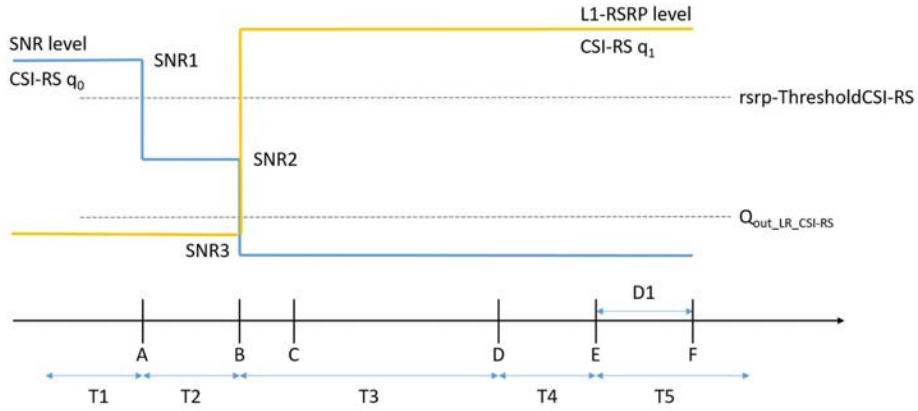

Figure A.4.5.5.4.1-1: SNR and L1-RSRP variation for CSI-RS-based beam failure detection and link recovery testing in DRX mode

A.4.5.5.4.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiat link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 1920+10 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.5.5 EN-DC Beam Failure Detection and Link Recovery Test for FR1 SCell configured with CSI-RS-based BFD and SSB-based LR in non-DRX mode

A.4.5.5.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving SCell and that the UE performs correct SSB-based link recovery based on beam candicate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the SCell without *schedulingRequestID-BFR-SCell-r16* configuration, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.4.5.5.5.1-1, A.4.5.5.5.1-2, and A.4.5.5.5.1-3 below. There are three cells, cell 1 is the E-UTRAN PCell, cell 2 is the PSCell and cell 3 is the SCell, in the test. UE is not provided by *schedulingRequestID-BFR-SCell-r16*, i.e., no configuration for PUCCH transmission resources, and UE shall perform the random access procedure to recover the beam failure. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.4.5.5.5.1-1 shows the SNR of the CSI-RS in set q_0 in the active SCell to emulate beam failure. Figure A.4.5.5.5.1-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1, cell 2 and cell3. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled.

Table A.4.5.5.5.1-1: Supported test configurations for FR1 PCell and SCell

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.4.5.5.5.1-2: General test parameters for FR1 SCell for beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Value	Comment
			Test 1	
Active PCell			Cell 1	
E-UTRA RF Channel Number			1	
Active PSCell			Cell 2	
RF Channel Number for PSCell			2	
Active SCell			Cell 3	
RF Channel Number for SCell			3	
Duplex mode	Config 1, 4		FDD	
	Config 2, 3, 5, 6		TDD	
BW channel	Config 1, 4	MHz	10: NRB,c = 52	
	Config 2, 5		10: NRB,c = 52	
	Config 3, 6		40: NRB,c = 106	
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1	
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1	
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1	
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1	
TDD Configuration	Config 1, 4		Not Applicable	
	Config 2, 5		TDDConf.1.1	
	Config 3, 6		TDDConf.2.1	
CORESET Reference Channel	Config 1, 4		CR.1.1 FDD	A.3.1.2
	Config 2, 5		CR.1.1 TDD	
	Config 3, 6		CR.2.1 TDD	
SSB Configuration	Config 1, 4		SSB.1 FR1	A.3.10
	Config 2, 5		SSB.1 FR1	
	Config 3, 6		SSB.2 FR1	

SMTC Configuration	Config 1, 2, 3, 4, 5, 6	kHz	SMTC.1	A.3.11
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4, 5		15	
	Config 3, 6		30	
PRACH Configuration	Config 1, 2, 4, 5		Table A.3.8.2.2-1	
	Config 3, 6		Table A.3.8.2.2-1	
csi-RS-Index assigned as beam failure detection RS in set q_0 in activated SCell			0	
OCNG parameters			OP.1	A.3.2.1
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			OFF	
Gap pattern ID			N.A.	
schedulingRequestID-BFR-SCell-r16			absent	When the field is absent, the random access procedure will be triggered for SCell BFR
SSB Index assigned as CBD RS (q1) in activated SCell			0	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdBFR	Config 1, 2, 4, 5	dBm/SCS	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3, 6		-95	
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer			pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for q_0 in activated SCell	Config 1, 4		CSI-RS.1.2 FDD	A.3.14
	Config 2, 5		CSI-RS.1.2 TDD	

	Config 3, 6		CSI-RS.2.2 TDD	
CSI-RS configuration for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD	A.3.14
	Config 2, 5		CSI-RS.1.1 TDD	
	Config 3, 6		CSI-RS.2.1 TDD	
TRS configuration	Config 1, 4		TRS.1.1 FDD	
	Config 2, 5		TRS.1.1 TDD	
	Config 3, 6		TRS.1.2 TDD	
csi-RS-Index assigned as RLM RS in PSCell	Config 1, 4		CSI-RS.1.2 FDD	A.3.14
	Config 2, 5		CSI-RS.1.2 TDD	
	Config 3, 6		CSI-RS.2.2 TDD	
T310 Timer		ms	1000	
N310			2	
T1		s	1	During this time the the UE shall be fully synchronized to cell 1
T2		s	0.18	
T3		s	0.14	
T4		s	0	
T5		s	0.17	
D1		s	0.13	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.4.5.5.5.1-3: Cell specific test parameters for FR1 PSCell and SCell for beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Cell2	Test 1 Cell3				
			T1 to T5	T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB						
EPRE ratio of PBCH DMRS to SSS		dB						
EPRE ratio of PBCH to PBCH DMRS		dB						
EPRE ratio of PSS to SSS		dB						
EPRE ratio of PDSCH DMRS to SSS		dB						
EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
SNR_CSI-RS of set q_0	Config 1, 4	dB	5	5	-3	-12	-12	-12
	Config 2, 5		5	5	-3	-12	-12	-12
	Config 3, 6		5	5	-3	-12	-12	-12
SNR_SSB of set q_1	Config 1, 4	dB	-10	-10	-10	10	10	10
	Config 2, 5		-10	-10	-10	10	10	10
	Config 3, 6		-10	-10	-10	10	10	10
SSB_RP of set q_1	Config 1, 4	dBm/SCS kHz	-108	-108	-108	-88	-88	-88
	Config 2, 5		-108	-108	-108	-88	-88	-88
	Config 3, 6		-105	-105	-105	-85	-85	-85
N_{oc}	Config 1, 4	dBm/15 kHz	-98	-98				
	Config 2, 5		-98	-98				
	Config 3, 6		-98	-98				

Propagation condition		TDL-C 300ns 100Hz	TDL-C 300ns 100Hz

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Void
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause [A.3.6].

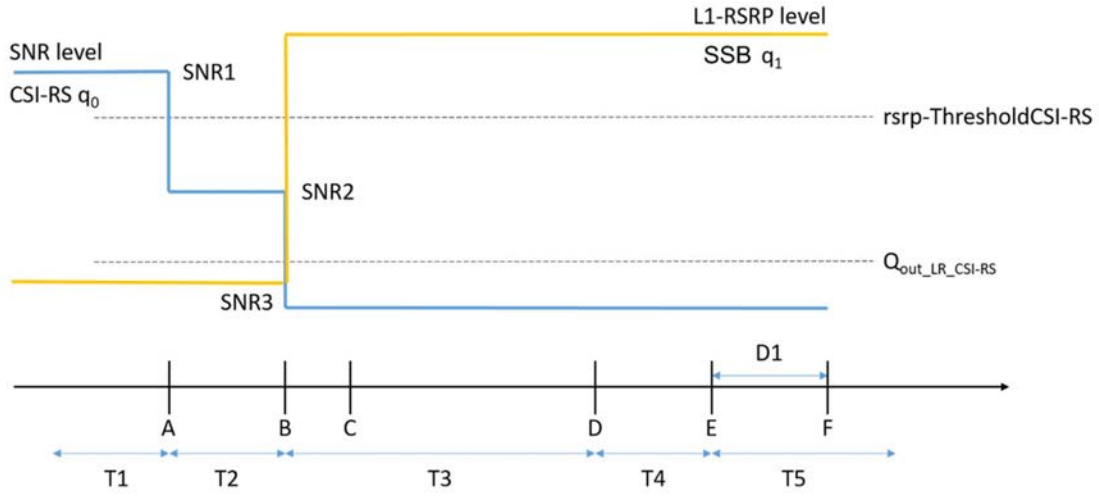

Figure A.4.5.5.5.1-1: SNR and L1-RSRP variation for beam failure detection and link recovery testing for SCell in non-DRX mode

A.4.5.5.5.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 2.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 2 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 2.

During T3 the UE shall detect beam failure and initiat link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 120+10 ms after the start of T5, the UE shall transmit preamble for UL-SCH resource application, followed by MAC-CE on the assigned uplink resources containing a beam associated with the candidate beam set q_1. The UE shall not transmit preamble earlier than time point B.

During T5, the System Simulator shall transmit a Random Access Response to UE after the System Simulator receives the preamble from UE. The UE shall transmit the msg.3 containing candidate beam set q1 for SCell BFR if UE receives the Random Access Response.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.5.6 EN-DC Beam Failure Detection and Link Recovery Test for FR1 SCell configured with CSI-RS-based BFD and SSB-based LR in DRX mode

A.4.5.5.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS based beam failure in the set q_0 configured for a serving SCell and that the UE performs correct SSB-based link recovery based on beam candicate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the SCell without *schedulingRequestID-BFR-SCell-r16* configuration, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.4.5.5.6.1-1, A.4.5.5.6.1-2, and A.4.5.5.6.1-3below. There are three cells, cell 1 is the E-UTRAN PCell, cell 2 is the PSCell and cell 3 is the SCell, in the test. UE is not provided by *schedulingRequestID-BFR-SCell-r16*, i.e., no configuration for PUCCH transmission resources, and UE shall perform the random access procedure to recover the beam failure. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.4.5.5.6.1-1 shows the SNR of the CSI-RS in set q_0 in the active SCell to emulate beam failure. Figure A.4.5.5.6.1-1 additionally shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1, cell 2 and cell 3. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in SCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.4.5.5.6.1-1: Supported test configurations for FR1 PCell and SCell

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.4.5.5.6.1-2: General test parameters for FR1 SCell for beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Value	Comment
			Test 1	
Active PCell			Cell 1	
E-UTRA RF Channel Number			1	
Active PSCell			Cell 2	
RF Channel Number for PSCell			2	
Active SCell			Cell 3	
RF Channel Number for SCell			3	
Duplex mode	Config 1, 4		FDD	

	Config 2, 3, 5, 6		TDD	
BWchannel	Config 1, 4	MHz	10: NRB,c = 52	
	Config 2, 5		10: NRB,c = 52	
	Config 3, 6		40: NRB,c = 106	
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1	
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1	
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1	
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1	
TDD Configuration	Config 1, 4		Not Applicable	
	Config 2, 5		TDDConf.1.1	
	Config 3, 6		TDDConf.2.1	
CORESET Reference Channel	Config 1, 4		CR.1.1 FDD	A.3.1.2
	Config 2, 5		CR.1.1 TDD	
	Config 3, 6		CR.2.1 TDD	
SSB Configuration	Config 1, 4		SSB.1 FR1	A.3.10
	Config 2, 5		SSB.1 FR1	
	Config 3, 6		SSB.2 FR1	
SMTC Configuration	Config 1, 2, 3, 4, 5, 6		SMTC.1	A.3.11
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4, 5	kHz	15	
	Config 3, 6		30	
PRACH Configuration	Config 1, 2, 4, 5		Table A.3.8.2.2-1	
	Config 3, 6		Table A.3.8.2.2-1	
csi-RS-Index assigned as beam failure detection RS in set q_0 in activated SCell			0	
OCNG parameters			OP.1	A.3.2.1
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average	dB	0	

		CSI-RS RE energy			
		DMRS precoder granularity		REG bundle size	
		REG bundle size		6	
DRX				DRX.7	A.3.3.7
Gap pattern ID				N.A.	
schedulingRequestID-BFR-SCell-r16				absent	When the field is absent, the random access procedure will be triggered for SCell BFR
SSB Index assigned as CBD RS (q1) in activated SCell				1	
rlmInSyncOutOfSyncThreshold				absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdBFR	Config 1, 2, 4, 5		dBm/SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3, 6			-95	
powerControlOffsetSS				db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount				n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer				pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for q_0 in activated SCell	Config 1, 4			CSI-RS.1.2 FDD	A.3.14
	Config 2, 5			CSI-RS.1.2 TDD	
	Config 3, 6			CSI-RS.2.2 TDD	
CSI-RS configuration for CSI reporting	Config 1, 4			CSI-RS.1.1 FDD	A.3.14
	Config 2, 5			CSI-RS.1.1 TDD	
	Config 3, 6			CSI-RS.2.1 TDD	
TRS configuration	Config 1, 4			TRS.1.1 FDD	
	Config 2, 5			TRS.1.1 TDD	
	Config 3, 6			TRS.1.2 TDD	
csi-RS-Index assigned as RLM RS in PSCell	Config 1, 4			CSI-RS.1.2 FDD	A.3.14
	Config 2, 5			CSI-RS.1.2 TDD	
	Config 3, 6			CSI-RS.2.2 TDD	
T310 Timer			ms	1000	
N310				2	
T1			s	1	During this time the the UE shall

			be fully synchronized to cell 1
T2	s	8.37	
T3	s	6.44	
T4	s	0	
T5	s	1.97	
D1	s	1.93	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.4.5.5.6.1-3: Cell specific test parameters for FR1 SCell for beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Cell2	Test 1 Cell3				
			T1 to T5	T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB						
EPRE ratio of PBCH DMRS to SSS		dB						
EPRE ratio of PBCH to PBCH DMRS		dB						
EPRE ratio of PSS to SSS		dB						
EPRE ratio of PDSCH DMRS to SSS		dB						
EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
SNR_CSI-RS of set q_0	Config 1, 4	dB	5	5	-3	-12	-12	-12
	Config 2, 5		5	5	-3	-12	-12	-12
	Config 3, 6		5	5	-3	-12	-12	-12
SNR_SSB of set q_1	Config 1, 4	dB	-10	-10	-10	10	10	10
	Config 2, 5		-10	-10	-10	10	10	10
	Config 3, 6		-10	-10	-10	10	10	10
SSB_RP of set q_1	Config 1, 4	dBm/SCS kHz	-108	-108	-108	-88	-88	-88
	Config 2, 5		-108	-108	-108	-88	-88	-88
	Config 3, 6		-105	-105	-105	-85	-85	-85
N_{oc}	Config 1, 4	dBm/ 15 kHz	-98	-98				
	Config 2, 5		-98	-98				
	Config 3, 6		-98	-98				
Propagation condition			TDL-C 300ns 100Hz	TDL-C 300ns 100Hz				

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	Void
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.

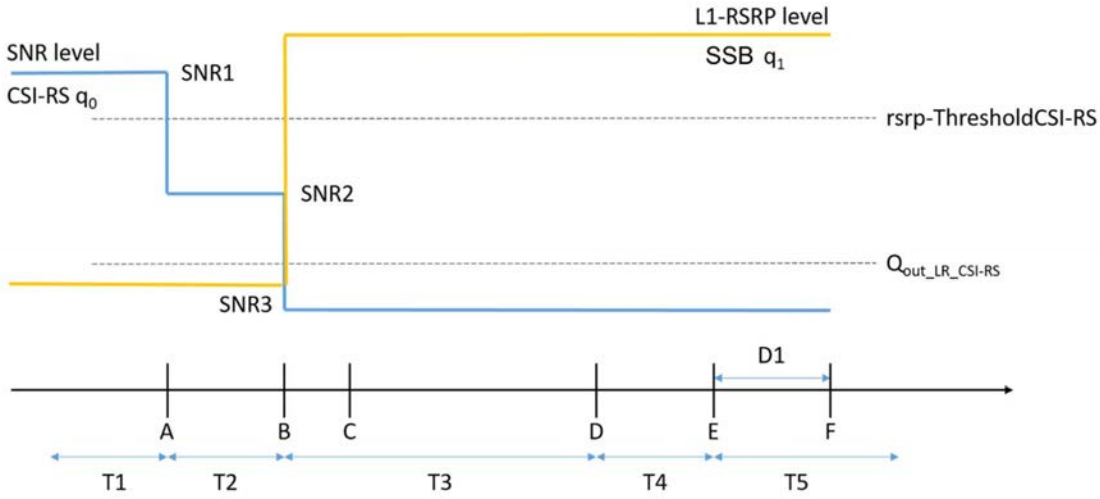

Figure A.4.5.5.6.1-1: SNR and L1-RSRP variation for beam failure detection and LR testing for SCell in DRX mode

A.4.5.5.6.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 2.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 2 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 2.

During T3 the UE shall detect beam failure and initiat link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 120+10 ms after the start of T5, the UE shall transmit preamble for UL-SCH resource application, followed by MAC-CE on the assigned uplink resources containing a beam associated with the candidate beam set q_1. The UE shall not transmit preamble earlier than time point B.

During T5, the System Simulator shall transmit a Random Access Response to UE after the System Simulator receives the preamble from UE. The UE shall transmit the msg.3 containing candidate beam set q1 for SCell BFR if UE receives the Random Access Response.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.5.7 EN-DC TRP specific Beam Failure Detection and Link Recovery Test for FR1 PSCell configured with SSB-based BFD and LR in non-DRX mode

A.4.5.5.7.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the TRP specific SSB-based beam failure in the set (q0,0), (q0,1) configured for a serving PSCell and that the UE performs correct SSB-based link recovery based on beam candidate set (q1,0) and (q1,1). The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the PSCell with *schedulingRequestID-BFR-r17* configured, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.4.5.5.7.1-1, A.4.5.5.7.1-2, A.4.5.5.7.1-3 and A.4.5.5.7.1-4 below. There are two cells, cell 1 is the E-UTRAN PCell, and cell 2 is the active PSCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.4.5.5.7.1-1 shows the variation of the downlink SNR of the PSCell and the SNR of the SSB in set q0 in the active PSCell to emulate SSB based beam failure. Figure A.4.5.5.7.1-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test 1.

Table A.4.5.5.7.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.4.5.5.7.1-2: General test parameters for FR1 PSCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Value	Comment
			Test 1	
Active E-UTRA PCell			Cell 1	
E-UTRA RF Channel Number			1	
Active PSCell			Cell 2	
RF Channel Number for PSCell			2	
Duplex mode	Config 1, 4		FDD	
	Config 2, 3, 5, 6		TDD	
BW channel	Config 1, 4	MHz	10: NRB,c = 52	
	Config 2, 5		10: NRB,c = 52	
	Config 3, 6		40: NRB,c = 106	
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1	

DL dedicated BWP configuration		Config 1, 2, 3, 4, 5, 6		DLBWP.1.1	
UL initial BWP configuration		Config 1, 2, 3, 4, 5, 6		ULBWP.0.1	
UL dedicated BWP configuration		Config 1, 2, 3, 4, 5, 6		ULBWP.1.1	
TDD Configuration		Config 1, 4		Not Applicable	
		Config 2, 5		TDDConf.1.1	
		Config 3, 6		TDDConf.2.1	
CORESET Reference Channel		Config 1, 4		CR.1.1 FDD	A.3.1.2
		Config 2, 5		CR.1.1 TDD	
		Config 3, 6		CR.2.1 TDD	
SSB Configuration for TRP0		Config 1, 4		SSB.3 FR1	A.3.10
		Config 2, 5		SSB.3 FR1	
		Config 3, 6		SSB.4 FR1	
SSB Configuration for TRP1		Config 1, 4		SSB.7 FR1	A.3.10
		Config 2, 5		SSB.7 FR1	
		Config 3, 6		SSB.8 FR1	
SMTC Configuration		Config 1, 2, 3, 4, 5, 6		SMTC.1	A.3.11
PDSCH/PDCCH subcarrier spacing		Config 1, 2, 4, 5	kHz	15	
		Config 3, 6		30	
PRACH Configuration		Config 1, 2, 4, 5		Table A.3.8.2.2-1	
		Config 3, 6		Table A.3.8.2.2-1	
SSB Index assigned as BFD RS (q0,0)				0	
SSB Index assigned as CBD RS (q1,0)				1	
SSB Index assigned as BFD RS (q0,1)				2	
SSB Index assigned as CBD RS (q1,1)				3	
OCNG parameters				OP.1	A.3.2.1
CP length				Normal	
Correlation Matrix and Antenna Configuration				2x2 Low	
Beam failure detection transmission parameters	DCI format			1-0	
	Number of Control OFDM symbols			2	
	Aggregation level		CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy		dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy		dB	0	
	DMRS precoder granularity			REG bundle size	
	REG bundle size			6	
DRX				OFF	
Gap pattern ID				gp0	
gapOffset				0	
schedulingRequestID-BFR- r17				Configured	
Periodicity of PUCCH for SR configuration for BFR on PSCell		Config 1, 2, 4, 5	slot	5	5ms
		Config 3, 6		10	
rlmInSyncOutOfSyncThreshold				absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdBFR		Config 1, 2, 4, 5	dBm/SCS	-98	Threshold used for $Q_{in_LR_SSB}$
		Config 3, 6		-95	

powerControlOffsetSS		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount		n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer		pbfd4	see TS 38.321 [7], clause 5.17
SSB Index assigned as RLM RS		0,1,2,3	
T310 Timer	ms	1000	
N310		2	
T1	s	1	During this time the the UE shall be fully synchronized to cell 1
T2	s	0.37	
T3	s	0.24	
T4	s	0	
T5	s	0.17	
D1	s	0.13	
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts. Note 3: E-UTRAN is in non-DRX mode under test.			

Table A.4.5.5.7.1-3: Cell specific test parameters for FR1 PSCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q0,0	Config 1, 4	dB	5	-3	-12	-12	-12
	Config 2, 5		5	-3	-12	-12	-12
	Config 3, 6		5	-3	-12	-12	-12
SNR_SSB of set q0,1	Config 7,10	dB	5	5	5	5	5
	Config 8, 11		5	5	5	5	5
	Config 9, 12		5	5	5	5	5
SNR_SSB of set q1,0	Config 1, 4	dB	0.2	0.2	20.2	20.2	20.2

	Config 2, 5		0.2	0.2	20.2	20.2	20.2
	Config 3, 6		0.2	0.2	20.2	20.2	20.2
SNR_SSB of set q1,1	Config 7, 10	dB	0.2	0.2	20.2	20.2	20.2
	Config 8, 11		0.2	0.2	20.2	20.2	20.2
	Config 9, 12		0.2	0.2	20.2	20.2	20.2
SSB_RP of set q1,0	Config 1, 4	dBm/SCS kHz	-108	-108	-88	-88	-88
	Config 2, 5		-108	-108	-88	-88	-88
	Config 3, 6		-105	-105	-85	-85	-85
SSB_RP of set q1,1	Config 7, 10	dBm/SCS kHz	-108	-108	-88	-88	-88
	Config 8, 11		-108	-108	-88	-88	-88
	Config 9, 12		-105	-105	-85	-85	-85
N_{oc}	Config 1, 4	dBm/15 KHz	-98				
	Config 2, 5		-98				
	Config 3, 6		-98				
Propagation condition			TDL-C 300ns 100Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.

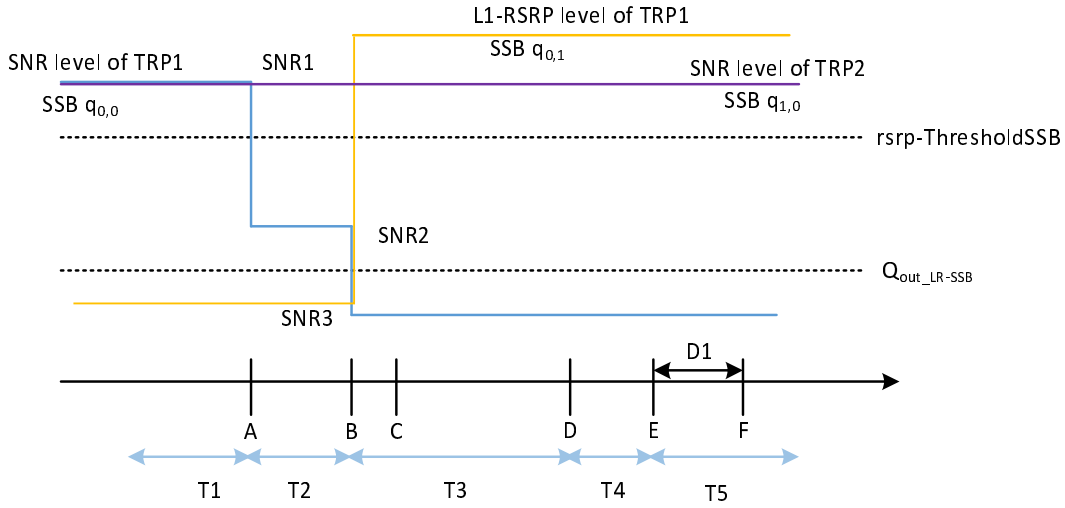

Figure A.4.5.5.7.1-1: SNR and L1-RSRP variation SSB for SSB-based beam failure detection and link recovery testing in non-DRX mode

A.4.5.5.7.2 Test Requirements

Test requirements are applied to TRP specific report respectively on (q0,0), (q0,1) for TRP 1 and (q1,0), (q1,1) for TRP 2 respectively as Figure A.4.5.5.7.1-1.

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 2 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 2.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set $q_{1,0}$ and $q_{1,1}$.

No later than time point F occurring no later than D1 = 120+10 ms after the start of T5, the UE shall transmit PUCCH with LRR, followed by BFR MAC CE containing a beam associated with the candidate beam set $q_{1,0}$. The UE shall not transmit PUCCH with an LRR with the candidate beam set $q_{1,0}$ earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.5.8 EN-DC TRP specific Beam Failure Detection and Link Recovery Test for FR1 SCell configured with CSI-RS-based BFD and SSB-based LR in non-DRX mode

A.4.5.5.8.1 Test Purpose and Environment

The test scenario is EN-DC and a NR SCell configured in the test contains two TRPs (i.e., TRP0 and TRP1). Each TRP is configured with different CSI-RS and SSB for beam failure detection and candidate beam detection. CSI-RS is configured as BFD-RS and SSB is configured as CBD-RS.

The purpose of this test is to verify that the UE properly detects the CSI-RS-based beam failure on the TRP using the respective configured BFD set $\bar{q}_{0,0}$ for TRP0 and $\bar{q}_{0,1}$ for TRP1. After the BFD is detected for the TRP, the test further verifies whether the UE performs the correct SSB-based link recovery based on the configured beam candidate set $\bar{q}_{1,0}$ for TRP0 and $\bar{q}_{1,1}$ for TRP1. In the test one TRP (TRP0) is provided with schedulingRequestID-BFR-r17 and other TRP (TRP1) is not provided with scheduling request ID. This test will partly verify the beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.18.

Supported test configuration are provided in Table A.4.5.5.8.1-1, general test parameters for FR1 SCell is provided in Table A.4.5.5.8.1-2, and Cell specific test parameter are provided in Table A.4.5.5.8.1-3. There are three cells in the test, cell 1 is the E-UTRAN PCell, cell 2 is the NR PSCell and cell 3 is the NR SCell. CSI report for SCell (cell 3) are transmitted on PSCell (cell 2).

The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.4.5.5.8.1-1 shows the SNR of the CSI-RS in set $q_{0,0}$ in the TRP0 to emulate beam failure. Figure A.4.5.5.8.1-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q_{10} and q_{11} of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1, cell 2 and cell3. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled.

Table A.4.5.5.8.1-1: Supported test configurations for FR1 PCell and SCell

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.4.5.5.8.1-2: General test parameters for FR1 SCell for beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Value	Comment
			Test 1	Same configuration for both TRP whereever applicbale
Active PCell			Cell 1	
E-UTRA RF Channel Number			1	
Active PSCell			Cell 2	
RF Channel Number for PSCell			2	
Active SCell			Cell 3	
RF Channel Number for SCell			3	
Duplex mode	Config 1, 4		FDD	
	Config 2, 3, 5, 6		TDD	
BW channel	Config 1, 4	MHz	10: NRB,c = 52	
	Config 2, 5		10: NRB,c = 52	
	Config 3, 6		40: NRB,c = 106	
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1	
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1	
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1	

UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1	
TDD Configuration	Config 1, 4		Not Applicable	
	Config 2, 5		TDDConf.1.1	
	Config 3, 6		TDDConf.2.1	
CORESET Reference Channel	Config 1, 4		CR.1.1 FDD	A.3.1.2
	Config 2, 5		CR.1.1 TDD	
	Config 3, 6		CR.2.1 TDD	
SSB Configuration	Config 1, 4		SSB.1 FR1	A.3.10 Same configuration for both TRP
	Config 2, 5		SSB.1 FR1	
	Config 3, 6		SSB.2 FR1	
SMTC Configuration	Config 1, 2, 3, 4, 5, 6		SMTC.1	A.3.11, Same configuration for both TRP
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4, 5	kHz	15	
	Config 3, 6		30	
PRACH Configuration	Config 1, 2, 4, 5		Table A.3.8.2.2-1	
	Config 3, 6		Table A.3.8.2.2-1	
csi-RS-Index assigned as beam failure detection RS in set q_{00} in activated SCell			0	
csi-RS-Index assigned as beam failure detection RS in set q_{01} in activated SCell			2	
OCNG parameters			OP.1	A.3.2.1
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			OFF	
Gap pattern ID			N.A.	
schedulingRequestID-BFR-r17			Configured, 1-2	
Periodicity of PUCCH for SR configuration for BFR on SCell	Config 1, 2, 4, 5	slot	5	5ms
	Config 3, 6		10	
schedulingRequestID-BFR2-r17			absent	When the field is absent, the random

				access procedure will be triggered for TRP BFR
Periodicity of PUCCH for SR configuration for BFR on TRP0			Slot	5	
SSB Index assigned as CBD RS (q10) in activated SCell				1	
SSB Index assigned as CBD RS (q11) in activated SCell				3	
rlmInSyncOutOfSyncThreshold				absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdBFR	Config 1, 2, 4, 5		dBm/SCS	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3, 6			-95	
powerControlOffsetSS				db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount				n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer				pbfd4	see TS 38.321 [7], clause 5.17
BFD-RS (CSI-RS) configuration for q_{00} in activated SCell	Config 1, 4			CSI-RS.1.2 FDD	A.3.14
	Config 2, 5			CSI-RS.1.2 TDD	
	Config 3, 6			CSI-RS.2.2 TDD	
BFD-RS (CSI-RS) configuration for q_{01} in activated SCell	Config 1, 4			CSI-RS.1.7 FDD	A.3.14
	Config 2, 5			CSI-RS.1.6 TDD	
	Config 3, 6			CSI-RS.2.7 TDD	
CSI-RS configuration for CSI reporting	Config 1, 4			CSI-RS.1.1 FDD	A.3.14
	Config 2, 5			CSI-RS.1.1 TDD	
	Config 3, 6			CSI-RS.2.1 TDD	
TRS configuration	Config 1, 4			TRS.1.1 FDD	
	Config 2, 5			TRS.1.1 TDD	
	Config 3, 6			TRS.1.2 TDD	
csi-RS-Index assigned as RLM RS in PSCell	Config 1, 4			CSI-RS.1.2 FDD	A.3.14
	Config 2, 5			CSI-RS.1.2 TDD	
	Config 3, 6			CSI-RS.2.2 TDD	
T310 Timer			ms	1000	
N310				2	
T1			s	1	During this time the the UE shall be fully synchronized to cell 1
T2			s	0.18	
T3			s	0.14	
T4			s	0	
T5			s	0.17	
D1			s	0.06	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.					

Table A.4.5.5.8.1-3: Cell specific test parameters for FR1 PSCell and SCell for beam failure detection and link recovery testing in non-DRX mode

Parameter	Unit	Cell2	TRP 0/1 Cell3				
		T1 to T5	T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS	dB						

EPRE ratio of PDCCH to PDCCH DMRS		dB	0	0				
EPRE ratio of PBCH DMRS to SSS		dB						
EPRE ratio of PBCH to PBCH DMRS		dB						
EPRE ratio of PSS to SSS		dB						
EPRE ratio of PDSCH DMRS to SSS		dB						
EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
SNR_CSI-RS of set q_{00}	Config 1, 4	dB	5	5	-3	-12	-12	-12
	Config 2, 5		5	5	-3	-12	-12	-12
	Config 3, 6		5	5	-3	-12	-12	-12
SNR_CSI-RS of set q_{01}	Config 1, 4		5	5	5	5	5	5
	Config 2, 5		5	5	5	5	5	5
	Config 3, 6		5	5	5	5	5	5
SNR_SSB of set q_{10}	Config 1, 4	dB	-10	-10	-10	10	10	10
	Config 2, 5		-10	-10	-10	10	10	10
	Config 3, 6		-10	-10	-10	10	10	10
SSB_RP of set q_{10}	Config 1, 4	dBm/SCS kHz	-108	-108	-108	-88	-88	-88
	Config 2, 5		-108	-108	-108	-88	-88	-88
	Config 3, 6		-105	-105	-105	-85	-85	-85
N_{oc}	Config 1, 4	dBm/15 kHz	-98	-98				
	Config 2, 5		-98	-98				
	Config 3, 6		-98	-98				
Propagation condition			TDL-C 300ns 100Hz	TDL-C 300ns 100Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Void
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause [A.3.6].

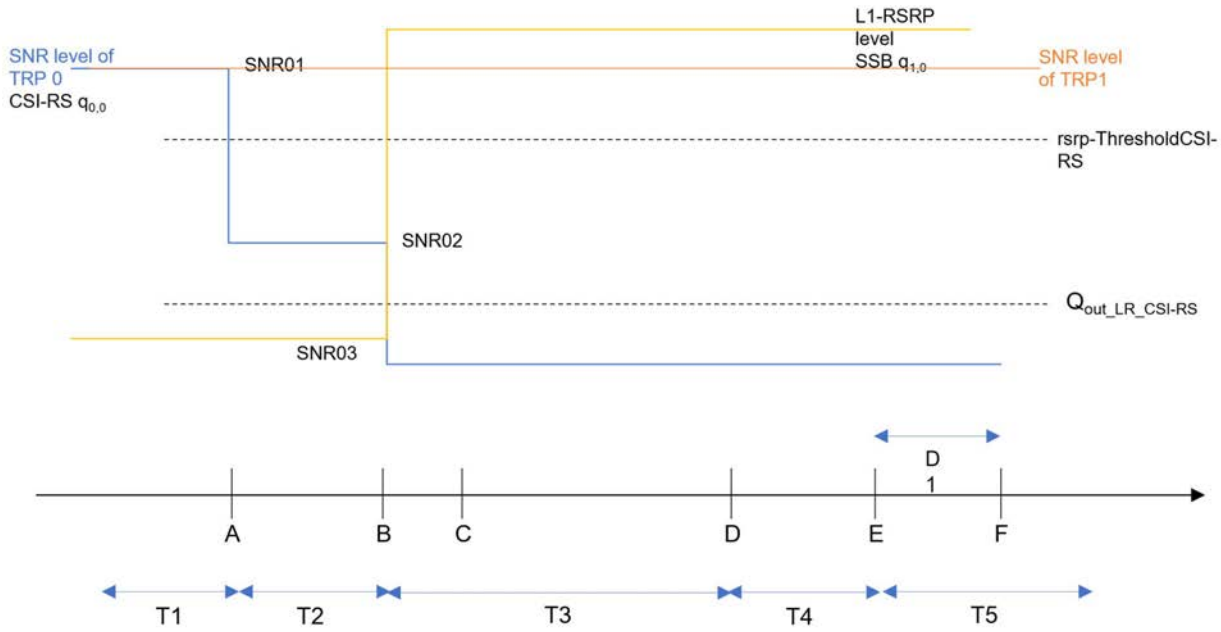

Figure A.4.5.5.8.1-1: SNR and L1-RSRP variation for beam failure detection and link recovery testing for TRP0 in non-DRX mode

A.4.5.5.8.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 2.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 2 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 2.

During T3 the UE shall detect beam failure on both TRP0 and TRP 1 and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set $q_{1,0}$ and $q_{1,1}$.

For TRP0, no later than time point F occurring no later than D1 = 60 ms after the start of T5, the UE shall transmit PUCCH with LRR, followed by BFR MAC CE containing a beam associated with the candidate beam set $q_{1,0}$. The UE shall not transmit PUCCH with an LRR with the candidate beam set $q_{1,0}$ earlier than time point B.

Test is concluded once the test equipment has received the BFR MAC CE from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.6 Active BWP switch

A.4.5.6.1 DCI-based and Timer-based Active BWP Switch

A.4.5.6.1.1 E-UTRAN – NR PSCell FR1 DL active BWP switch in non-DRX in synchronous EN-DC

A.4.5.6.1.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement defined in TS38.133 clause 8.6, and interruption requirement for E-UTRA victim cell defined in TS36.133 clause 7.32.2.7. Supported test configurations are shown in Table A.4.5.6.1.1.1-1.

The test scenario comprises of one E-UTRA PCell (Cell 1), and one NR PSCell (Cell 2) as given in Table A.4.5.6.1.1.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell is specified in Table A.4.5.6.1.1.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

PDCCHs indicating new transmissions shall be sent continuously on PSCell (Cell 2) to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on Cell 2 and the time duration of T2.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), and Cell 2 (PSCell) on radio channel 2 (PSCC).
- UE is configured with 2 different UE-specific downlink bandwidth parts for PSCell, BWP-1 and BWP-2, in Cell 2 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in PSCell.
- UE is configured with a *bwp-InactivityTimer* timer value for PSCell.

All cells have constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

> Time period T1 starts when a DCI format 1_1 command for PSCell DL BWP switch, sent from the test equipment to the UE, is received at the UE side in PSCell's slot # denoted *i*. The UE shall switch its bandwidth part from BWP-1 to BWP-2.
>
> The UE shall be able to receive PDSCH at the beginning of the DL slot right after PSCell's DL slot ($i+T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the PSCell no later than at the beginning of the DL slot right after DL slot ($i+T_{BWPswitchDelay}+k1$). The UE shall be continuously scheduled on PSCell's BWP-2 starting from the beginning of the DL slot right after DL slot ($i+T_{BWPswitchDelay}$).
>
> The starting time of PCell(Cell 1) interruption due to BWP switch on PSCell shall occur within the BWP switch delay.

During T2, the test equipment won't transmit DCI format for PDSCH reception on PSCell(Cell 2).

During T3,

> The time period T3 starts from the slot #*j*, where j is the beginning slot of the DL subframe immediately after the *bwp-InactivityTimer* timer expires. The UE shall switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1.

The UE shall be able to receive PDSCH at the beginning of the DL slot right after PSCell's DL slot ($j+T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the PSCell at latest at the beginning of the DL slot right after DL slot ($j+T_{BWPswitchDelay}+k1$). The UE shall be continuously scheduled on PSCell's BWP-1 starting from the beginning of the DL slot right after DL slot ($j+T_{BWPswitchDelay}$).

The starting time of PCell(Cell 1) interruption due to BWP switch of PSCell shall occur within the BWP switch delay.

The test equipment verifies the DL BWP switch time in PSCell by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK is received.

The test equipment verifies that potential interruption to E-UTRA PCell is carried out in the correct time span by monitoring ACK/NACK sent in PCell during BWP switch of PSCell, respectively.

Table A.4.5.6.1.1.1-1: DL BWP switch supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations. Note 2: A UE which fulfils the requirements in test case A.4.5.6.1.2 can skip the test cases in A.4.5.6.1.1.	

Table A.4.5.6.1.1.1-2: General test parameters for DL BWP switch in synchronous EN-DC

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
CP length		Normal	
DRX		OFF	For both PCell and PSCell
bwp-InactivityTimer	ms	[200]	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell2 timing offset to cell1	µs	3	Synchronous EN-DC
T1	s	[0.2]	
T2	s	[0.2]	
T3	s	[0.2]	

Table A.4.5.6.1.1.1-3.: NR Cell specific test parameters for DL BWP switch in synchronous EN-DC

Parameter		Unit	Cell 2
Frequency Range			FR1
Duplex mode	Config 1,4		FDD
	Config 2,3,5,6		TDD
TDD configuration	Config 1,4		Not Applicable
	Config 2,5		TDDConf.1.1
	Config 3,6		TDDConf.2.1
$BW_{channel}$	Config 1,4		10 MHz: $N_{RB,c}$ = 52
	Config 2,5		10 MHz: $N_{RB,c}$ = 52
	Config 3,6		40 MHz: $N_{RB,c}$ = 106

Active BWP ID			1, 2
Initial DL BWP Configuration	Config 1,4		DLBWP.0.2 Note 4
	Config 2,5		
	Config 3,6		
Active DL BWP-1 Configuration	Config 1,4		DLBWP.1.1 Note 4
	Config 2,5		
	Config 3,6		
Active DL BWP-2 Configuration	Config 1,4		DLBWP.1.3 Note 4
	Config 2,5		
	Config 3,6		
Initial UL BWP Configuration	Config 1,4		ULBWP.0.2 Note 4
	Config 2,5		
	Config 3,6		
Active UL BWP-1 Configuration	Config 1,4		ULBWP.1.1 Note 4
	Config 2,5		
	Config 3,6		
Active UL BWP-2 Configuration	Config 1,4		N/A
	Config 2,5		ULBWP.1.3 Note 4
	Config 3,6		ULBWP.1.3 Note 4
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2,5		SR.1.1 TDD
	Config 3,6		SR.2.1 TDD
RMSI CORESET parameters	Config 1,4		CR.1.1 FDD
	Config 2,5		CR.1.1 TDD
	Config 3,6		CR.2.1 TDD
Dedicated CORESET parameters	Config 1,4		CCR.1.2 FDD
	Config 2,5		CCR.1.2 TDD
	Config 3,6		CCR.2.4 TDD
OCNG Patterns			OP.1
SSB Configuration	Config 1,2,4,5		SSB.1 FR1
	Config 3,6		SSB.2 FR1
SMTC Configuration			SMTC.1
Correlation Matrix and Antenna Configuration			1x2 Low
TRS Configuration	Config 1,4		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note 2	Config 1,2,4,5	dBm/SCS	[-104]
	Config 3,6		[-101]
N_{oc} Note 2		dBm/15kHz	-104
SS-RSRP Note 3	Config 1,2,4,5	dBm/SCS	[-87]
	Config 3,6		[-90]
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	Config 1,2,4,5	dBm/9.36MHz	[-59]
	Config 3,6	dBm/38.16MHz	[-61.9]
Propagation Condition			AWGN

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for Noc to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].

A.4.5.6.1.1.2 Test Requirements

During T1, the UE shall start to send the ACK for PSCell from the first UL slot that occurs after the beginning of DL slot ($i+T_{BWPswitchDelay}+k1$).

During T3, the UE shall start to send the ACK for PSCell from the first UL slot that occurs after the beginning of DL slot ($j+T_{BWPswitchDelay}+k1$).

Where, *k1* is the timing between DL data receiving and acknowledgement as specified in [7].

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 8.6.2-1.

All of the above test requirements shall be fulfilled in order for the observed PSCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

During T1, the start time of PCell interruption during PSCell active BWP switch shall not happen outside the BWP switch delay.

During T3, the start time of PCell interruption of during PSCell active BWP switch shall not happen outside the BWP switch delay.

The interruption of PCell shall not be longer than the interruption duration specified for active BWP switch in TS36.133 Clause 7.32.2.7.

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch interruption to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK in the DL slot right after DL slot ($i+T_{BWPswitchDelay}+k1$), ($j+T_{BWPswitchDelay}+k1$), then the UE shall use the next available uplink resource for reporting the corresponding ACK.

A.4.5.6.1.2 E-UTRAN – NR PSCell FR1 DL active BWP switch with FR1 SCell in non-DRX in synchronous EN-DC

A.4.5.6.1.2.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement defined in clause 8.6, and interruption requirements for NR victim cell defined in clause 8.2.1.2.7 and interruption requirement for E-UTRA victim cell defined in clause 7.32.2.7 of TS 36.133 [15]. Supported test configurations for LTE PCell and NR PSCell are shown in Table A.4.5.6.1.2.1-1. Supported test configurations for NR SCell are shown in table A.4.5.6.1.2.1-1A. Test configuration for LTE PCell and NR PSCell and test configuration for NR SCell are chosen independently.

The test scenario comprises of one E-UTRA PCell (Cell 1), one PSCell (Cell 2) and one SCell (Cell 3) as given in Table A.4.5.6.1.2.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of PSCell and SCell are specified in Table A.4.5.6.1.2.1-3 and Table A.4.5.6.1.2.1-4 below.

PDCCHs indicating new transmissions shall be sent continuously on E-UTRA PCell (Cell 1) and PSCell (Cell 2) to ensure that the UE will have ACK/NACK sending.

PDCCHs indicating new transmissions shall be sent continuously on SCell (Cell 3) to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on Cell 3 and the time duration of T2.

Before the test starts,

- UE is connected to Cell 1 (E-UTRA PCell) on radio channel 1 (PCC), Cell 2 (PSCell) on radio channel 2 (PSCC) and Cell 3 (SCell) on radio channel 3 (SCC).
- UE is configured with 2 different UE-specific downlink bandwidth parts for SCell, BWP-1 and BWP-2, in Cell 3 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.
- UE is configured with 1 UE-specific downlink bandwidth parts the same as initial BWP for PSCell, BWP-0 in Cell 2 before starting the test.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in SCell.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-0 in PSCell.
- UE is configured with a *bwp-InactivityTimer* timer value for SCell.

All cells have constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

> Time period T1 starts when a DCI format 1_1 command for SCell DL BWP switch, sent from the test equipment to the UE, is received at the UE side in SCell's slot # denoted *i*. The UE shall switch its bandwidth part from BWP-1 to BWP-2.
>
> The UE shall be able to receive PDSCH on the first DL slot that occurs after the beginning of SCell's DL slot ($i+T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the SCell on PSCell no later than on the first UL slot that occurs after the beginning of slot ($i+T_{BWPswitchDelay}+k1$). The UE shall be continuously scheduled on SCell's BWP-2 starting from the first DL slot that occurs after the beginning of slot ($i+T_{BWPswitchDelay}$).
>
> E-UTRA PCell(Cell 1) interruption due to BWP switch on PSCell shall occur within the BWP switch delay.
>
> PSCell(Cell 2) interruption due to BWP switch on SCell shall occur within the BWP switch delay.

During T2, the test equipment won't transmit DCI format for PDSCH reception on SCell(Cell 3).

During T3,

> The time period T3 starts from the slot #*j*, where j is the first slot of the subframe immediately after *bwp-InactivityTimer* timer expires. The UE shall switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1.
>
> The UE shall be able to receive PDSCH on the first DL slot that occurs after the beginning of SCell's DL slot ($j+T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the SCell on PSCell no later than on the first UL slot that occurs after the beginning of the slot ($j+T_{BWPswitchDelay}+k1$). The UE shall be continuously scheduled on SCell's BWP-1 starting from the first DL slot that occurs after the beginning of slot ($j+T_{BWPswitchDelay}$).

E-UTRA PCell(Cell 1) interruption due to BWP switch of SCell shall occur within the BWP switch delay.

PSCell(Cell 2) interruption due to BWP switch of SCell shall occur within the BWP switch delay.The test equipment verifies the DL BWP switch time in SCell by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK is received.

The test equipment verifies that potential interruption to E-UTRA PCell and NR PSCell is carried out in the correct time span by monitoring ACK/NACK sent in PCell and PSCell during BWP switch of SCell, respectively.

Table A.4.5.6.1.2.1-1: DL BWP switch supported test configurations for LTE PCell and NR PSCell

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: A UE which fulfils the requirements in test case A.4.5.6.1.2 can skip the test cases in A.4.5.6.1.1. Note 3: Void Note 4: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration	

Table A.4.5.6.1.2.1-1A: DL BWP switch supported test configurations for NR SCell

$Config_{SCell}$	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: A UE which fulfils the requirements in test case A.4.5.6.1.2 can skip the test cases in A.4.5.6.1.1. Note 3: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration	

Table A.4.5.6.1.2.1-2: General test parameters for DL BWP switch in synchronous EN-DC

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2, 3	Two NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
Active SCell		Cell 3	SCell on RF channel number 3.
CP length		Normal	
DRX		OFF	
bwp-InactivityTimer	ms	[200]	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell-individual offset for cells on RF channel number 3	dB	0	Individual offset for cells on SCC.
Cell2 timing offset to cell1	µs	3	Synchronous EN-DC
Cell3 timing offset to cell2	µs	3	Synchronous cells

T1	s	[0.2]	
T2	s	[0.2]	
T3	s	[0.2]	

Table A.4.5.6.1.2.1-3: NR Cell specific test parameters for NR PSCell for DL BWP switch in synchronous EN-DC

Parameter		Unit	Cell 2
Frequency Range			FR1
Duplex mode	Config 1,4		FDD
	Config 2,3,5,6		TDD
TDD configuration	Config 1,4		Not Applicable
	Config 2,5		TDDConf.1.1
	Config 3,6		TDDConf.2.1
$BW_{channel}$	Config 1,2,3,4,5,6		Note 7
$BW_{occupied}$	Config 1,2,4,5	RB	52 Note 5
	Config 3,6		106 Note 6
Active BWP ID			0
Initial DL BWP Configuration	Config 1,2,3,4,5,6		DLBWP.0.2
Active DL BWP-0 Configuration	Config 1,2,3,4,5,6		DLBWP.0.2
Active DL BWP-1 Configuration	Config 1,2,3,4,5,6		N.A.
Active DL BWP-2 Configuration	Config 1,2,3,4,5,6		N.A.
Initial UL BWP Configuration	Config 1,2,3,4,5,6		ULBWP.0.2
Active UL BWP-0 Configuration	Config 1,2,3,4,5,6		ULBWP.0.2
Active UL BWP-1 Configuration	Config 1,2,3,4,5,6		N.A.
Active UL BWP-2 Configuration	Config 1,2,3,4,5,6		N.A.
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2,5		SR.1.1 TDD
	Config 3,6		SR.2.1 TDD
RMSI CORESET parameters	Config 1,4		CR.1.1 FDD
	Config 2,5		CR.1.1 TDD
	Config 3,6		CR.2.1 TDD
Dedicated CORESET parameters	Config 1,4		CCR.1.2 FDD
	Config 2,5		CCR.1.2 TDD
	Config 3,6		CCR.2.4 TDD
OCNG Patterns	Config 1,2,4,5		OP.1 Note 5
	Config 3,6		OP.1 Note 6
SSB Configuration	Config 1,2,4,5		SSB.1 FR1
	Config 3,6		SSB.2 FR1
SMTC Configuration			SMTC.1
TRS Configuration	Config 1,4		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
Antenna Configuration			1x2
Propagation Condition			AWGN
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			

EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} Note 2		dBm/15 kHz	-104
SS-RSRP Note 3		dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	Config 1,2,4,5	dBm/9.36MHz	-58.96
	Config 3,6	dBm/38.16MHz	-52.86

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].
Note 5: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 6: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 7: NRB,c. is derived from Table 5.3.2-1 in TS38.101-1[2] with configured BWchannel.

Table A.4.5.6.1.2.1-4: NR Cell specific test parameters for NR SCell for DL BWP switch in synchronous EN-DC

Parameter		Unit	Cell 3
Frequency Range			FR1
Duplex mode	$Config_{SCell}$ 1		FDD
	$Config_{SCell}$ 2,3		TDD
TDD configuration	$Config_{SCell}$ 1		Not Applicable
	$Config_{SCell}$ 2		TDDConf.1.1
	$Config_{SCell}$ 3		TDDConf.2.1
$BW_{channel}$	$Config_{SCell}$ 1,2,3		Note 7
$BW_{occupied}$	$Config_{SCell}$ 1,2	RB	52 Note 5
	$Config_{SCell}$ 3		106 Note 6
Active BWP ID			1,2
Initial DL BWP Configuration	$Config_{SCell}$ 1,2,3		DLBWP.0.2
Active DL BWP-0 Configuration	$Config_{SCell}$ 1,2,3		N.A.
Active DL BWP-1 Configuration	$Config_{SCell}$ 1,2,3		DLBWP.1.3
Active DL BWP-2 Configuration	$Config_{SCell}$ 1,2,3		DLBWP.1.1
Initial UL BWP Configuration	$Config_{SCell}$ 1,2,3		N.A.
Active UL BWP-0 Configuration	$Config_{SCell}$ 1,2,3		N.A.
Active UL BWP-1 Configuration	$Config_{SCell}$ 1,2,3		N.A.
Active UL BWP-2 Configuration	$Config_{SCell}$ 1,2,3		N.A.

PDSCH Reference measurement channel	$Config_{SCell}$ 1		SR.1.1 FDD
	$Config_{SCell}$ 2		SR.1.1 TDD
	$Config_{SCell}$ 3		SR.2.1 TDD
RMSI CORESET parameters	$Config_{SCell}$ 1		CR.1.1 FDD
	$Config_{SCell}$ 2		CR.1.1 TDD
	$Config_{SCell}$ 3		CR.2.1 TDD
Dedicated CORESET parameters	$Config_{SCell}$ 1		CCR.1.2 FDD
	$Config_{SCell}$ 2		CCR.1.2 TDD
	$Config_{SCell}$ 3		CCR.2.4 TDD
OCNG Patterns	$Config_{SCell}$ 1,2		OP.1 Note 5
	$Config_{SCell}$ 3		OP.1 Note 6
SSB Configuration	$Config_{SCell}$ 1,2		SSB.1 FR1
	$Config_{SCell}$ 3		SSB.2 FR1
SMTC Configuration			SMTC.1
TRS Configuration	$Config_{SCell}$ 1		TRS.1.1 FDD
	$Config_{SCell}$ 2		TRS.1.1 TDD
	$Config_{SCell}$ 3		TRS.1.2 TDD
Antenna Configuration			1x2
Propagation Condition			AWGN
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} Note 2		dBm/15 kHz	-104
SS-RSRP Note 3		dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	$Config_{SCell}$ 1,2	dBm/9.36MHz	-58.96
	$Config_{SCell}$ 3	dBm/38.16MHz	-52.86

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].
Note 5: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 6: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 7: NRB,c. is derived from Table 5.3.2-1 in TS38.101-1[2] with configured BWchannel.

A.4.5.6.1.2.2 Test Requirements

During T1, the UE shall start to send the ACK for SCell on PSCell from the first UL slot that occurs after the beginning of DL slot ($i+T_{BWPswitchDelay}+k1$).

During T3, the UE shall start to send the ACK for SCell on PSCell from the first UL slot that occurs after the beginning of DL slot ($j+T_{BWPswitchDelay}+k1$).

All of the above test requirements shall be fulfilled in order for the observed SCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

During T1, the start of the interruption of PCell during SCell active BWP switch shall not happen outside the BWP switch delay.

During T3, the start of the interruption of PCell during SCell active BWP switch shall not happen outside the BWP switch delay.

The interruption of PCell shall not be longer than the interruption duration specified for active BWP switch in clause 7.32.2.7 of TS 36.133 [15].

During T1, the start of the interruption of PSCell during SCell active BWP switch shall not happen outside the BWP switch delay.

During T3, the start of the interruption of PSCell during SCell active BWP switch shall not happen outside the BWP switch delay.

The interruption of PSCell shall not be longer than the interruption duration specified for active BWP switch in clause 8.6.2.

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch interruption to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK/NACK in the first UL slot that occurs after the beginning of DL slot ($i+T_{BWPswitchDelay}+k1$), ($j+T_{BWPswitchDelay}+k1$), then the UE shall use the next available uplink resource for reporting the corresponding ACK.

Editor's note: FFS value of k1 for type 1 and type 2 UE.

A.4.5.6.2 RRC-based Active BWP Switch

A.4.5.6.2.1 E-UTRAN – NR PSCell FR1 DL active BWP switch in non-DRX in synchronous EN-DC

A.4.5.6.2.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement for RRC-based BWP switch defined in clause 8.6.3. Supported test configurations are shown in Table A.4.5.6.2.1.1-1.

The test scenario comprises of one E-UTRA PCell (Cell 1) and one NR PSCell (Cell 2) as given in Table A.4.5.6.2.1.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell are specified in Table A.4.5.6.2.1.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC) and to Cell 2 (PSCell) on radio channel 2 (PSCC).
- UE has bandwidth part BWP-1 in its RRC-configuration for Cell 1 (PSCell).

- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 of initial condition in PSCell.

All cells have constant signal levels throughout the test.

The test consists of 1 time period, with duration of T1.

During T1,

If the *RRCReconfiguration* is embedded in E-UTRA RRC message, time period T1 starts when a E-UTRA RRC message *RRCConnectionReconfiguration* with updated bandwidth part configuration, sent from the test equipment to the UE, is completely received at the UE side from PCell in PSCell's slot # denoted *i*. Otherwise, i.e., if the *RRCReconfiguration* is not embedded in E-UTRA RRC message, time period T1 starts when a *RRCReconfiguration* with updated bandwidth part configuration, sent from the test equipment to the UE, is completely received at the UE side in from PSCell in PSCell's slot # denoted *i*. The UE shall reconfigure its bandwidth part with the updated bandwidth part BWP-1 of final condition.

The UE shall be able to receive PDSCH at the beginning of the DL slot right after PSCell's DL slot ($i+T_{RRCprocessingDelay}+T_{BWPswitchDelayRRC}$) as defined in clause 8.6.3 and be ready for the reception of uplink grant for the PSCell no later than at the beginning of the DL slot right after slot ($i+T_{RRCprocessingDelay}+T_{BWPswitchDelayRRC}$). The UE shall be continuously scheduled on PSCell's BWP-1 starting from the beginning of the DL slot right after slot ($i+T_{RRCprocessingDelay}+T_{BWPswitchDelayRRC}$).

$T_{RRCprocessingDelay}$ and $T_{BWPswitchDelayRRC}$ are defined in clause 8.6.3.

The test equipment verifies the DL BWP switch time in PSCell by counting the time from the time when the RRC Reconfiguration message including updated BWP configurationis sent till the time when RRC Reconfiguration Complete message is received.

Table A.4.5.6.2.1.1-1: DL BWP switch supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.4.5.6.2.1.1-2: General test parameters for DL BWP switch in synchronous EN-DC

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
CP length		Normal	
DRX		OFF	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell2 timing offset to cell1	μs	3	Synchronous EN-DC
T1	s	[0.2]	

Table A.4.5.6.2.1.1-3: NR Cell specific test parameters for DL BWP switch in synchronous EN-DC

Parameter			Unit	Cell 2
Frequency Range				**FR1**
Duplex mode		Config 1,4		FDD
		Config 2,3,5,6		TDD
TDD configuration		Config 1,4		Not Applicable
		Config 2,5		TDDConf.1.1
		Config 3,6		TDDConf.2.1
$BW_{channel}$		Config 1,4		10 MHz: $N_{RB,c}$ = 52
		Config 2,5		10 MHz: $N_{RB,c}$ = 52
		Config 3,6		40 MHz: $N_{RB,c}$ = 106
Active DL BWP ID				1, 2
Initial DL BWP Configuration		Config 1,4		DLBWP.0.2
		Config 2,5		
		Config 3,6		
Initial UL BWP Configuration		Config 1,4		ULBWP.0.2
		Config 2,5		
		Config 3,6		
Initial Condition	Active DL BWP-1 Configuration	Config 1,4		DLBWP.1.3
		Config 2,5		
		Config 3,6		
	Active UL BWP-1 Configuration	Config 1,4		ULBWP.1.3
		Config 2,5		
		Config 3,6		
Final Condition	Active DL BWP-1 Configuration	Config 1,4		DLBWP.1.1
		Config 2,5		
		Config 3,6		
	Active UL BWP-1 Configuration	Config 1,4		ULBWP.1.1
		Config 2,5		
		Config 3,6		
Initial UL BWP Configuration		Config 1,4		ULBWP.0.2
		Config 2,5		
		Config 3,6		
Active UL BWP-1 Configuration		Config 1,4		ULBWP.1.3
		Config 2,5		
		Config 3,6		
Active UL BWP-2 Configuration		Config 1,4		ULBWP.1.1
		Config 2,5		
		Config 3,6		
PDSCH Reference measurement channel		Config 1,4		SR.1.1 FDD
		Config 2,5		SR.1.1 TDD
		Config 3,6		SR2.1 TDD
RMSI CORESET parameters		Config 1,4		CR.1.1 FDD
		Config 2,5		CR.1.1 TDD
		Config 3,6		CR2.1 TDD
Dedicated CORESET parameters		Config 1,4		CCR.1.2 FDD
		Config 2,5		CCR.1.2 TDD
		Config 3,6		CCR.2.4 TDD
OCNG Patterns				OP.1
SSB Configuration		Config 1,2,4,5		SSB.1 FR1
		Config 3,6		SSB.2 FR1
SMTC Configuration				SMTC.1
TRS Configuration		Config 1,4		TRS.1.1 FDD
		Config 2,5		TRS.1.1 TDD

	Config 3,6		TRS.1.2 TDD
Antenna Configuration			1x2
Propagation Condition			AWGN
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note 2		dBm/15 kHz	[-104]
SS-RSRP Note 3		dBm/15 kHz	[-87]
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	Config 1,2,4,5	dBm/9.36MHz	[-59]
	Config 3,6	dBm/38.16MHz	[-61.9]

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].

A.4.5.6.2.1.2 Test Requirements

During T1, the UE shall be ready for the reception of uplink grant for PSCell in the beginning of the DL slot right after slot ($i + T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}$).

All of the above test requirements shall be fulfilled in order for the observed PSCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.6.3 Simultaneous DCI-based and Timer-based Active BWP Switch on multiple CCs

A.4.5.6.3.1 Simultaneous E-UTRAN – NR PSCell FR1 DL active BWP switch in non-DRX in EN-DC on multiple CCs

A.4.5.6.3.1.1 Test Purpose and Environment

The purpose of this test is to verify the requirement of DL BWP switch delay on multiple CCs in TS38.133 clause 8.6.2A.1, and interruption requirement for E-UTRA victim cell defined in TS36.133 clause 7.32.2.7. Supported test configurations for LTE PCell and NR PSCell are shown in Table A.4.5.6.3.1.1-1. Supported test configurations for NR SCell are shown in table A.4.5.6.3.1.1-1A. Test configuration for LTE PCell and NR PSCell and test configuration for NR SCell are chosen independently.

The test scenario comprises of one E-UTRA PCell (Cell 1), one NR PSCell (Cell 2) and one NR SCell (Cell 3) as given in Table A.4.5.6.3.1.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell and NR SCell are specified in Table A.4.5.6.3.1.1-3 and Table A.4.5.6.3.1.1-4 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

PDCCHs indicating new transmissions shall be sent continuously on PSCell (Cell 2) and SCell (Cell 3) to ensure that the UE would have ACK/NACK sending except for the time duration T2 when BWPs are switching on Cell 2 and Cell 3.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), Cell 2 (PSCell) on radio channel 2 (PSCC) and Cell 3(SCell) on radio channel 3.
- UE is configured with 2 different UE-specific downlink bandwidth parts for PSCell, BWP-1 and BWP-2, before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.
- UE is configured with 2 different UE-specific downlink bandwidth parts for SCell, BWP-1 and BWP-2, before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in PSCell
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in SCell
- UE is configured with a *bwp-InactivityTimer* timer value for PSCell and SCell.

All cells have constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

> Time period T1 starts when a DCI format 1_1 command for PSCell DL BWP switch, sent from the test equipment to the UE, is received at the UE side in PSCell's slot # denoted *i*. The UE shall switch its PSCell bandwidth part from BWP-1 to BWP-2. On the same slot on Cell 3 test equipment shall send a DCI format 1_1 command for SCell DL BWP switch. The UE shall switch its SCell bandwidth part from BWP-1 to BWP-2.
>
> The UE shall be able to receive PDSCH on PSCell and SCell at the beginning of the DL slot right after DL slot ($i+ T_{MultipleBWPswitchDelay}$) as defined in clause 8.6.2A.1 and starts to report valid ACK/NACK for the PSCell and SCell no later than at the beginning of the DL slot right after DL slot ($i+ T_{MultipleBWPswitchDelay}+k1$). The UE shall be continuously scheduled on both PCell's and SCell's BWP-2 starting from the beginning of the DL slot right after DL slot ($i+ T_{MultipleBWPswitchDelay}$).
>
> The starting time of PCell(Cell 1) interruption due to BWP switch on PSCell and SCell shall occur within the BWP switch delay.

During T2, the test equipment won't transmit DCI format for PDSCH reception on PSCell(Cell 2) and SCell(Cell 3).

During T3,

> The time period T3 starts from the slot #*j*, where *j* is the beginning slot of the DL subframe immediately after the *bwp-InactivityTimer* timer expires on PSCell. *bwp-InactivityTimer* timer on SCell shall also expire on slot #*j*. The UE shall switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1 on both PSCell and SCell. The UE shall be able to receive PDSCH on both PSCell and SCell at the beginning of the DL slot right after DL slot ($j+ T_{MultipleBWPswitchDelay}$) as defined in clause 8.6.2B.1 and starts to report valid ACK/NACK for the PSCell and SCell at latest at the beginning of the DL slot right after DL slot ($j+ T_{MultipleBWPswitchDelay} +k1$). The UE shall be continuously scheduled on both PSCell's and SCell's BWP-1 starting from the beginning of the DL slot right after DL slot ($j+ T_{MultipleBWPswitchDelay}$).
>
> The starting time of PCell(Cell 1) interruption due to BWP switch of PSCell shall occur within the BWP switch delay.

The test equipment verifies the DL BWP switch time in PSCell and SCell by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK is received.

The test equipment verifies that potential interruption to E-UTRA PCell is carried out in the correct time span by monitoring ACK/NACK sent in PCell during BWP switch of PSCell and SCell.

Table A.4.5.6.3.1.1-1: DL BWP switch supported test configurations for LTE PCell and NR PSCell

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations. Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration.	

Table A.4.5.6.3.1.1-1A: DL BWP switch supported test configurations for NR SCell

$Config_{SCell}$	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration	

Table A.4.5.6.3.1.1-2: General test parameters for DL BWP switch in synchronous EN-DC

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2,3	Two NR radio channels are used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
Active SCell		Cell 3	SCell on RF channel number 3.
CP length		Normal	
DRX		OFF	For both PCell and PSCell
bwp-InactivityTimer	ms	[200]	For both PSCell and SCell
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell-individual offset for cells on RF channel number 3	dB	0	Individual offset for cells on SCC.
Cell2 timing offset to cell1	µs	3	Synchronous EN-DC
Cell3 timing offset to cell2	µs	3	Synchronous EN-DC
T1	s	[0.2]	
T2	s	[0.2]	
T3	s	[0.2]	

Table A.4.5.6.3.1.1-3: NR Cell specific test parameters for NR PSCell for DL BWP switch in synchronous EN-DC

Parameter		Unit	Cell 2
Frequency Range			FR1
Duplex mode	Config 1,4		FDD
	Config 2,3,5,6		TDD
TDD configuration	Config 1,4		Not Applicable
	Config 2,5		TDDConf.1.1
	Config 3,6		TDDConf.2.1
$BW_{channel}$	Config 1,4		10 MHz: $N_{RB,c}$ = 52
	Config 2,5		10 MHz: $N_{RB,c}$ = 52
	Config 3,6		40 MHz: $N_{RB,c}$ = 106
Active BWP ID			1,2
Initial DL BWP Configuration	Config 1,4		DLBWP.0.2 Note 4
	Config 2,5		
	Config 3,6		
Active DL BWP-1 Configuration	Config 1,4		DLBWP.1.1 Note 4
	Config 2,5		
	Config 3,6		
Active DL BWP-2 Configuration	Config 1,4		DLBWP.1.3 Note 4
	Config 2,5		
	Config 3,6		
Initial UL BWP Configuration	Config 1,4		ULBWP.0.2 Note 4
	Config 2,5		
	Config 3,6		
Active UL BWP-1 Configuration	Config 1,4		ULBWP.1.1 Note 4
	Config 2,5		
	Config 3,6		
Active UL BWP-2 Configuration	Config 1,4		ULBWP.1.3 Note 4
	Config 2,5		
	Config 3,6		
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2,5		SR.1.1 TDD
	Config 3,6		SR.2.1 TDD
RMSI CORESET parameters	Config 1,4		CR.1.1 FDD
	Config 2,5		CR.1.1 TDD
	Config 3,6		CR.2.1 TDD
Dedicated CORESET parameters	Config 1,4		CCR.1.1 FDD
	Config 2,5		CCR.1.1 TDD
	Config 3,6		CCR.2.1 TDD
OCNG Patterns			OP.1
SSB Configuration	Config 1,2,4,5		SSB.1 FR1
	Config 3,6		SSB.2 FR1
SMTC Configuration			SMTC.1
Correlation Matrix and Antenna Configuration			1x2 Low
TRS Configuration	Config 1,4		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			

N_{oc} Note 2	Config 1,2,4,5	dBm/SCS	[-104]
	Config 3,6		[-101]
N_{oc} Note 2		dBm/15kHz	[-104]
SS-RSRP Note 3	Config 1,2,4,5	dBm/SCS	[-87]
	Config 3,6		[-90]
$\hat{E}_s/I_{ot}$		dB	[17]
$\hat{E}_s/N_{oc}$		dB	[17]
Io Note3	Config 1,2,4,5	dBm/ 9.36MHz	[-59]
	Config 3,6	dBm/ 38.16MHz	[-61.9]
Propagation Condition			AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for Noc to be fulfilled. Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].			

Table A.4.5.6.3.1.1-4: NR Cell specific test parameters for NR SCell for DL BWP switch in synchronous EN-DC

Parameter		Unit	Cell 3
Frequency Range			FR1
Duplex mode	$Config_{SCell}$ 1		FDD
	$Config_{SCell}$ 2,3		TDD
TDD configuration	$Config_{SCell}$ 1		Not Applicable
	$Config_{SCell}$ 2		TDDConf.1.1
	$Config_{SCell}$ 3		TDDConf.2.1
$BW_{channel}$	$Config_{SCell}$ 1		10 MHz: $N_{RB,c}$ = 52
	$Config_{SCell}$ 2		10 MHz: $N_{RB,c}$ = 52
	$Config_{SCell}$ 3		40 MHz: $N_{RB,c}$ = 106
Active BWP ID			1,2
Initial DL BWP Configuration	$Config_{SCell}$ 1		DLBWP.0.2 Note 4
	$Config_{SCell}$ 2		
	$Config_{SCell}$ 3		
Active DL BWP-1 Configuration	$Config_{SCell}$ 1		DLBWP.1.1 Note 4
	$Config_{SCell}$ 2		
	$Config_{SCell}$ 3		
Active DL BWP-2 Configuration	$Config_{SCell}$ 1		DLBWP.1.3 Note 4
	$Config_{SCell}$ 2		
	$Config_{SCell}$ 3		
Initial UL BWP Configuration	$Config_{SCell}$ 1		ULBWP.0.2 Note 4
	$Config_{SCell}$ 2		
	$Config_{SCell}$ 3		
Active UL BWP-1 Configuration	$Config_{SCell}$ 1		ULBWP.1.1 Note 4
	$Config_{SCell}$ 2		
	$Config_{SCell}$ 3		
Active UL BWP-2 Configuration	$Config_{SCell}$ 1		ULBWP.1.3 Note 4
	$Config_{SCell}$ 2		
	$Config_{SCell}$ 3		
PDSCH Reference measurement channel	$Config_{SCell}$ 1		SR.1.1 FDD
	$Config_{SCell}$ 2		SR.1.1 TDD
	$Config_{SCell}$ 3		SR.2.1 TDD

RMSI CORESET parameters	$Config_{SCell}$ 1		CR.1.1 FDD
	$Config_{SCell}$ 2		CR.1.1 TDD
	$Config_{SCell}$ 3		CR.2.1 TDD
Dedicated CORESET parameters	$Config_{SCell}$ 1		CCR.1.1 FDD
	$Config_{SCell}$ 2		CCR.1.1 TDD
	$Config_{SCell}$ 3		CCR.2.1 TDD
OCNG Patterns			OP.1
SSB Configuration	$Config_{SCell}$ 1,2		SSB.1 FR1
	$Config_{SCell}$ 3		SSB.2 FR1
SMTC Configuration			SMTC.1
Correlation Matrix and Antenna Configuration			1x2 Low
TRS Configuration	$Config_{SCell}$ 1		TRS.1.1 FDD
	$Config_{SCell}$ 2		TRS.1.1 TDD
	$Config_{SCell}$ 3		TRS.1.2 TDD
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} Note 2	$Config_{SCell}$ 1,2	dBm/SCS	[-104]
	$Config_{SCell}$ 3		[-101]
N_{oc} Note 2		dBm/15kHz	[-104]
SS-RSRP Note 3	$Config_{SCell}$ 1,2	dBm/SCS	[-87]
	$Config_{SCell}$ 3		[-90]
$\hat{E}_s/I_{ot}$		dB	[17]
$\hat{E}_s/N_{oc}$		dB	[17]
Io Note3	$Config_{SCell}$ 1,2	dBm/ 9.36MHz	[-59]
	$Config_{SCell}$ 3	dBm/ 38.16MHz	[-61.9]
Propagation Condition			AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for Noc to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].

A.4.5.6.3.1.2 Test Requirements

During T1, the UE shall start to send the ACK for PSCell and SCell from the first UL slot that occurs after the beginning of DL slot ($i+ T_{MultipleBWPswitchDelay} +k1$).

During T3, the UE shall start to send the ACK for PSCell and SCell from the first UL slot that occurs after the beginning of DL slot ($j+ T_{MultipleBWPswitchDelay} +k1$).

Where, *k1* is the timing between DL data receiving and acknowledgement as specified in [7].

Depending on UE capability, UE shall finish BWP switch within the time duration $T_{MultipleBWPswitchDelay}$ defined in 8.6.2A.1.

All of the above test requirements shall be fulfilled in order for the observed PSCell and SCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

During T1, the start time of PCell interruption during PSCell and SCell active BWP switch shall not happen outside the BWP switch delay.

During T3, the start time of PCell interruption of during PSCell and SCell active BWP switch shall not happen outside the BWP switch delay.

The interruption of PCell shall not be longer than the interruption duration specified for active BWP switch in TS36.133 Clause 7.32.2.7.

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch interruption to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK in the DL slot right after DL slot ($i+ T_{MultipleBWPswitchDelay} +k1$), ($j+ T_{MultipleBWPswitchDelay} +k1$), then the UE shall use the next available uplink resource for reporting the corresponding ACK.

A.4.5.6.4 Simultaneous RRC-based Active BWP Switch on multiple CCs

A.4.5.6.4.1 E-UTRAN – NR PSCell FR1 DL active BWP switch in non-DRX in synchronous EN-DC on multiple CCs

A.4.5.6.4.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL dormant BWP switch delay requirement defined in clause 8.6, and interruption requirements for NR victim cell defined in clause 8.2.1.2.15 and interruption requirement for E-UTRA victim cell defined in clause 7.32 of TS 36.133 [15]. Supported test configurations for LTE PCell and NR PSCell are shown in Table A.4.5.6.4.1.1-1. Supported test configurations for NR SCell are shown in Table A.4.5.6.4.1.1-1A. Test configuration for LTE PCell and NR PSCell and test configuration for NR SCell are chosen independently.

The test scenario comprises of one E-UTRA PCell (Cell 1), one NR PSCell (Cell 2) and one NR SCell (Cell 3) as given in Table A.4.5.6.4.1.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell and SCell are specified in Table A.4.5.6.4.1.1-3 and Table A.4.5.6.4.1.1-4 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), PSCell (Cell 2) on radio channel 2 (PSCC) and SCell (Cell 3) on radio channel 3 (SCC).
- UE has bandwidth part BWP-1 in its RRC-configuration for PSCell (Cell 2) and SCell (Cell 3)
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in PSCell (Cell 2) and SCell (Cell 3).

All cells have constant signal levels throughout the test.

The test consists of 1 time period, with duration of T1.

During T1,

Time period T1 starts when a *RRCReconfiguration* with updated bandwidth part configuration for both PSCell(Cell 2) and SCell(Cell 3), sent from the test equipment to the UE, is completely received at the UE side in PSCell's slot # denoted *i*. The UE shall reconfigure its bandwidth part with the updated bandwidth part configuration on PSCell(Cell 2) and SCell(Cell 3).

The UE shall be able to receive PDSCH at the beginning of the DL slot right after PSCell's DL slot ($i+\frac{T_{RRC processing Delay}+T_{BWP switch Delay RRC}+D_{RRC}}{NR\ slot\ length}$) as defined in clause 8.6.3A.1 and be ready for the reception of uplink grant for the PSCell(Cell 2) and SCell(Cell 3) no later than at the beginning of the DL slot right after slot ($i+\frac{T_{RRC processing Delay}+T_{BWP switch Delay RRC}+D_{RRC}}{NR\ slot\ length}$). The UE shall be continuously scheduled on PSCell's BWP-1 and SCell's BWP-1 starting from the beginning of the DL slot right after slot ($i+\frac{T_{RRC processing Delay}+T_{BWP switch Delay RRC}+D_{RRC}}{NR\ slot\ length}$).

$T_{RRCprocessingDelay}$, $T_{BWPswitchDelayRRC}$, D_{RRC} are defined in clause 8.6.3A.1 .

The test equipment verifies the DL BWP switch time in PSCell(Cell 2) and SCell(Cell 3) by counting the time from the time when the RRC Reconfiguration message including updated BWP configuration sent till the time when RRC Reconfiguration Complete message is received.

Table A.4.5.6.4.1.1-1: DL BWP switch supported test configurations for LTE PCell and NR PSCell

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: A UE which fulfils the requirements in the test case in clause A.4.5.6.4.2 can skip the test cases in current clause A.4.5.6.4.1. Note 3: Void Note 4: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration	

Table A.4.5.6.4.1.1-1A: DL BWP switch supported test configurations for NR SCell

$Config_{SCell}$	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: A UE which fulfils the requirements in the test case in clause A.4.5.6.4.2 can skip the test cases in current clause A.4.5.6.4.1. Note 3: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration	

Table A.4.5.6.4.1.1-2: General test parameters for DL BWP switch in synchronous EN-DC

Parameter	Unit	Value	Comment

E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2,3	Two NR radio channel is used for this test
Active PCell		Cell 1	Pcell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
Active SCell		Cell 3	SCell on RF channel number 3.
CP length		Normal	
DRX		OFF	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell-individual offset for cells on RF channel number 3	dB	0	Individual offset for cells on SCC.
Cell2 timing offset to cell1	µs	3	Synchronous EN-DC
Cell3 timing offset to cell2	µs	3	Synchronous cells
T1	s	[0.2]	

Table A.4.5.6.4.1.1-3: NR Cell specific test parameters for NR PSCell for DL BWP switch in synchronous EN-DC

Parameter		Unit	Cell 2
Frequency Range			FR1
Duplex mode	Config 1,4		FDD
	Config 2,3,5,6		TDD
TDD configuration	Config 1,4		Not Applicable
	Config 2,5		TDDConf.1.1
	Config 3,6		TDDConf.1.2
$BW_{channel}$	Config 1,4		10 MHz: $N_{RB,c}$ = 52
	Config 2,5		10 MHz: $N_{RB,c}$ = 52
	Config 3,6		40 MHz: $N_{RB,c}$ = 106
Active BWP ID			1,2
Initial BWP Configuration	Config 1,4		DLBWP.0.2
	Config 2,5		
	Config 3,6		
Active BWP-0 Configuration	Config 1,4		N/A
	Config 2,5		
	Config 3,6		
Active BWP-1 Configuration	Config 1,4		DLBWP.1.3
	Config 2,5		
	Config 3,6		
Active BWP-2 Configuration	Config 1,4		DLBWP.1.1
	Config 2,5		
	Config 3,6		
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2,5		SR.1.1 TDD
	Config 3,6		SR.2.1 TDD
RMSI CORESET parameters	Config 1,4		CR.1.1 FDD
	Config 2,5		CR.1.1 TDD
	Config 3,6		CR.2.1 TDD
Dedicated CORESET parameters, Test 1	Config 1,4		CCR.1.1 FDD
	Config 2,5		CCR.1.1 TDD
	Config 3,6		CCR.2.1 TDD
Dedicated CORESET	Config 1,4		CCR.1.5 FDD
parameters, Test 2	Config 2,5		CCR.1.5 TDD
	Config 3,6		CCR.2.3 TDD
OCNG Patterns			OP.1

SSB Configuration	Config 1,2,4,5		SSB.1 FR1
	Config 3,6		SSB.2 FR1
SMTC Configuration			SMTC.1
TRS Configuration	Config 1,4		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
Antenna Configuration			1x2
Propagation Condition			AWGN
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} Note 2		dBm/15 kHz	-104
SS-RSRP Note 3		dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	Config 1,2,4,5	dBm/9.36MHz	-59
	Config 3,6	dBm/38.16MHz	-61.9

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].

Table A.4.5.6.4.1.1-4: NR Cell specific test parameters for NR SCell for DL BWP switch in synchronous EN-DC

Parameter		Unit	Cell 3
Frequency Range			FR1
Duplex mode	$Config_{SCell}$ 1		FDD
	$Config_{SCell}$ 2,3		TDD
TDD configuration	$Config_{SCell}$ 1		Not Applicable
	$Config_{SCell}$ 2		TDDConf.1.1
	$Config_{SCell}$ 3		TDDConf.1.2
$BW_{channel}$	$Config_{SCell}$ 1		10 MHz: $N_{RB,c}$ = 52
	$Config_{SCell}$ 2		10 MHz: $N_{RB,c}$ = 52
	$Config_{SCell}$ 3		40 MHz: $N_{RB,c}$ = 106
Active BWP ID			0
Initial BWP Configuration	$Config_{SCell}$ 1		DLBWP.0.2
	$Config_{SCell}$ 2		
	$Config_{SCell}$ 3		
Active BWP-0 Configuration	$Config_{SCell}$ 1		DLBWP.0.2
	$Config_{SCell}$ 2		
	$Config_{SCell}$ 3		
Active BWP-1 Configuration	$Config_{SCell}$ 1		N/A
	$Config_{SCell}$ 2		
	$Config_{SCell}$ 3		
Active BWP-2 Configuration	$Config_{SCell}$ 1		N/A
	$Config_{SCell}$ 2		
	$Config_{SCell}$ 3		

PDSCH Reference measurement channel	$Config_{SCell}$ 1		SR.1.1 FDD
	$Config_{SCell}$ 2		SR.1.1 TDD
	$Config_{SCell}$ 3		SR.2.1 TDD
RMSI CORESET parameters	$Config_{SCell}$ 1		CR.1.1 FDD
	$Config_{SCell}$ 2		CR.1.1 TDD
	$Config_{SCell}$ 3		CR.2.1 TDD
Dedicated CORESET parameters, Test 1	$Config_{SCell}$ 1		CCR.1.1 FDD
	$Config_{SCell}$ 2		CCR.1.1 TDD
	$Config_{SCell}$ 3		CCR.2.1 TDD
Dedicated CORESET parameters, Test 2	$Config_{SCell}$ 1		CCR.1.5 FDD
	$Config_{SCell}$ 2		CCR.1.5 TDD
	$Config_{SCell}$ 3		CCR.2.3 TDD
OCNG Patterns			OP.1
SSB Configuration	$Config_{SCell}$ 1,2		SSB.1 FR1
	$Config_{SCell}$ 3		SSB.2 FR1
SMTC Configuration			SMTC.1
TRS Configuration	$Config_{SCell}$ 1		TRS.1.1 FDD
	$Config_{SCell}$ 2		TRS.1.1 TDD
	$Config_{SCell}$ 3		TRS.1.2 TDD
Antenna Configuration			1x2
Propagation Condition			AWGN
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} Note 2		dBm/15 kHz	-104
SS-RSRP Note 3		dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io^{Note3}	$Config_{SCell}$ 1,2	dBm/9.36MHz	[-59]
	$Config_{SCell}$ 3	dBm/38.16MHz	[-61.9]

A.4.5.6.4.1.2 Test Requirements

During T1, the UE shall be ready for the reception of uplink grant for PSCell and SCell in the beginning of the DL slot right after slot $(i+\frac{T_{RRC processing Delay}+T_{BWP switch Delay RRC}+D_{RRC}}{NR\ slot\ length})$.

All of the above test requirements shall be fulfilled in order for the observed PSCell and SCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.6.4.2 E-UTRAN – NR FR1 PSCell SCell dormancy switch of two FR1 SCells inside active time

A.4.5.6.4.2.1 Test Purpose and Environment

The purpose of this test is to verify the delay requirement of BWP switching from dormancy to non-dormancy and from non-dormancy to dormancy on SCell defined in clause 8.6.2, and interruption requirements for NR victim cell defined in clause 8.2.1.2.15 and interruption requirement for E-UTRA victim cell defined in clause 7.32.2.7 of TS 36.133 [15]. Supported test configurations for LTE PCell and NR PSCell are shown in Table A.4.5.6.4.2.1-1.

Supported test configurations for NR SCells are shown in Table A.4.5.6.4.2.1-1A. Test configuration for LTE PCell and NR PSCell and test configuration for NR SCells are chosen independently. Test configurations for two NR SCells are chosen independently.

The test scenario comprises of one E-UTRA PCell (Cell 1), one NR PSCell (Cell 2) and two NR SCells (Cell 3, and Cell 4) as given in Table A.4.5.6.4.2.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell and SCells are specified in Table A.4.5.6.4.2.1-3, Table A.4.5.6.4.2.1-4 and Table A.4.5.6.4.2.1-5 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) and PSCell (Cell 2) to ensure that the UE will have ACK/NACK sending.

PDCCHs indicating new transmissions shall be sent continuously on SCell (Cell 3, and Cell 4) to ensure that the UE would have ACK/NACK sending except for the time duration when SCell (Cell2) performs the dormancy switching and stays in the dormant BWP.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), Cell 2 (PSCell) on radio channel 2 (PSCC),, Cell 3 (SCell) on radio channel 3 (SCC) and Cell 4 (SCell) on radio channel 4 (SCC).
- UE is configured with 1 UE-specific downlink bandwidth parts the same as initial BWP for PSCell, BWP-0, in Cell 2 before starting the test. BWP-0 always include bandwidth of the initial DL BWP and SSB.
- UE is configured with 2 UE-specific downlink bandwidth parts for SCell, BWP-1 and BWP-2 in Cell 3 and Cell 4 before starting the test.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-0 in PSCell.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in all SCells.
- UE is indicated in *dormantBWP -Id* that the dormant BWP is BWP-2 in all SCells.

All cells have constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

> Time period T1 starts when a DCI format 1_1 command for enterning dormant BWP in SCell, sent from the test equipment to the UE, is received at the UE side in PCell's slot # denoted *i*. Upon reception of the PDCCH indicating entering dormant BWP in PCell, UE shall switch the DL BWP-1 to DL BWP-2 in all SCells, i.e., switching from non-dormant BWP to dormant BWP.
>
> The UE shall be able to receive PDSCH and report valid ACK/NACK on the PCell and PSCell all the time except interruption.
>
> The starting time of PCell (Cell 1) interruption due to dormancy switching on SCells shall occur within the dormant BWP switch delay.
>
> The starting time of PSCell (Cell 2) interruption due to dormancy switching on SCells shall occur within the dormant BWP switch delay.

During T2, the test equipment won't transmit DCI format for PDSCH reception on all SCells.

> The UE shall be able to receive PDSCH and report valid ACK/NACK on the PCell and PSCell all the time except interruption.

During T3,

Time period T3 starts when a DCI format 1_1 command for leaving dormant BWP in SCells, sent from the test equipment to the UE, is received at the UE side in PSCell's slot # denoted *j*. Upon reception of the PDCCH indicating leaving dormant BWP in PSCell, UE shall switch the DL BWP-2 to DL BWP-1 in SCells, i.e., switching from dormant BWP to non-dormant BWP.

The UE shall be able to receive PDSCH on all SCells no later than the first DL slot that occurs after the beginning of PSCell's DL slot ($j+ T_{mutipledormantBWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK on all SCells no later than the first UL slot that occurs after the beginning of slot ($j+N$) as defined in clause 10.3 in TS38.213.

The UE shall be able to receive PDSCH and report valid ACK/NACK on the PCell and PSCell all the time except interruption.

The starting time of PCell (Cell 1) interruption due to dormancy switching on SCells shall occur within the dormant BWP switch delay.

The starting time of PSCell (Cell 2) interruption due to dormancy switching on SCells shall occur within the dormant BWP switch delay.

The test equipment verifies that potential interruption to E-UTRA PCell and NR PSCell is carried out in the correct time span by monitoring ACK/NACK sent in PCell and PSCell during dormant BWP switch of SCells, respectively.

Table A.4.5.6.4.2.1-1: Dormant BWP switch supported test configurations for LTE PCell and NR PSCell

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: A UE which fulfils the requirements in the test case in current clause A.4.5.6.4.2 can skip the test cases in clause A.4.5.6.4.1 Note 3: Void. Note 4: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration	

Table A.4.5.6.4.2.1-1A: Dormant BWP switch supported test configurations for NR SCells

$Config_{SCell}$	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: A UE which fulfils the requirements in the test case in current clause A.4.5.6.4.2 can skip the test cases in clause A.4.5.6.4.1 Note 3: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration Note 4: Test configurations for two NR SCells are chosen independently.	

Table A.4.5.6.4.2.1-2: General test parameters for Dormant BWP switch in synchronous EN-DC

Parameter	Unit	Value		Comment
		Test 1	Test 2	

E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2, 3, 4	Three NR radio channels are used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
Active SCell		Cell 3	SCell on RF channel number 3.
Active SCell		Cell 4	SCell on RF channel number 4.
CP length		Normal	
DRX		OFF	
bwp-InactivityTimer	ms	200	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell-individual offset for cells on RF channel number 3	dB	0	Individual offset for cells on SCC.
Cell2 timing offset to cell1	µs	3	Synchronous EN-DC
Cell3 timing offset to cell2	µs	3	Synchronous cells
Cell4 timing offset to cell2	µs	3	Synchronous cells
OFDM symbol range in slot for transmission of DCI with dormancy indication		0 – 2 | 3 – 11	
T1	s	0.2	
T2	s	0.2	
T3	s	0.2	

Table A.4.5.6.4.2.1-3: NR Cell specific test parameters for NR PSCell for Dormant BWP switch in synchronous EN-DC

Parameter		Unit	Cell 2
Frequency Range			FR1
Duplex mode	Config 1,4		FDD
	Config 2,3,5,6		TDD
TDD configuration	Config 1,4		Not Applicable
	Config 2,5		TDDConf.1.1
	Config 3,6		TDDConf.1.2
$BW_{channel}$	Config 1,4		10 MHz: $N_{RB,c}$ = 52
	Config 2,5		10 MHz: $N_{RB,c}$ = 52
	Config 3,6		40 MHz: $N_{RB,c}$ = 106
Active BWP ID			0
Initial BWP Configuration	Config 1,4		DLBWP.0.2
	Config 2,5		
	Config 3,6		
Active BWP-0 Configuration	Config 1,4		DLBWP.0.2
	Config 2,5		
	Config 3,6		
Active BWP-1	Config 1,4		N/A

Configuration	Config 2,5		
	Config 3,6		
Active BWP-2 Configuration	Config 1,4		N/A
	Config 2,5		
	Config 3,6		
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2,5		SR.1.1 TDD
	Config 3,6		SR2.1 TDD
RMSI CORESET parameters	Config 1,4		CR.1.1 FDD
	Config 2,5		CR.1.1 TDD
	Config 3,6		CR2.1 TDD
Dedicated CORESET parameters, Test 1	Config 1,4		CCR.1.1 FDD
	Config 2,5		CCR.1.1 TDD
	Config 3,6		CCR.2.1 TDD
Dedicated CORESET parameters, Test 2	Config 1,4		CCR.1.5 FDD
	Config 2,5		CCR.1.5 TDD
	Config 3,6		CCR.2.3 TDD
OCNG Patterns			OP.1
SSB Configuration	Config 1,2,4,5		SSB.1 FR1
	Config 3,6		SSB.2 FR1
SMTC Configuration			SMTC.1
TRS Configuration	Config 1,4		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
Antenna Configuration			1x2
Propagation Condition			AWGN
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} Note 2		dBm/15 kHz	-104
SS-RSRP Note 3		dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	Config 1,2,4,5	dBm/9.36MHz	-59
	Config 3,6	dBm/38.16MHz	-61.9

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].

Table A.4.5.6.4.2.1-4: NR Cell specific test parameters for NR SCell (Cell 3) for Dormant BWP switch in synchronous EN-DC

Parameter		Unit	Cell 3
Frequency Range			FR1
Duplex mode	$Config_{SCell1}$ 1		FDD
	$Config_{SCell1}$ 2,3		TDD
TDD configuration	$Config_{SCell1}$ 1		Not Applicable
	$Config_{SCell1}$ 2		TDDConf.1.1
	$Config_{SCell1}$ 3		TDDConf.1.2
$BW_{channel}$	$Config_{SCell1}$ 1		10 MHz: $N_{RB,c}$ = 52
	$Config_{SCell1}$ 2		10 MHz: $N_{RB,c}$ = 52
	$Config_{SCell1}$ 3		40 MHz: $N_{RB,c}$ = 106
Active BWP ID			1,2
Initial BWP Configuration	$Config_{SCell1}$ 1		N/A
	$Config_{SCell1}$ 2		
	$Config_{SCell1}$ 3		
Active BWP-0 Configuration	$Config_{SCell1}$ 1		N/A
	$Config_{SCell1}$ 2		
	$Config_{SCell1}$ 3		
Active BWP-1 Configuration	$Config_{SCell1}$ 1		DLBWP.1.1
	$Config_{SCell1}$ 2		
	$Config_{SCell1}$ 3		
Active BWP-2 Configuration	$Config_{SCell1}$ 1		DLBWP.1.3
	$Config_{SCell1}$ 2		
	$Config_{SCell1}$ 3		
PDSCH Reference measurement channel	$Config_{SCell1}$ 1		SR.1.1 FDD
	$Config_{SCell1}$ 2		SR.1.1 TDD
	$Config_{SCell1}$ 3		SR.2.1 TDD
RMSI CORESET parameters	$Config_{SCell1}$ 1		CR.1.1 FDD
	$Config_{SCell1}$ 2		CR.1.1 TDD
	$Config_{SCell1}$ 3		CR.2.1 TDD
Dedicated CORESET parameters, Test 1	$Config_{SCell1}$ 1		CCR.1.1 FDD
	$Config_{SCell1}$ 2		CCR.1.1 TDD
	$Config_{SCell1}$ 3		CCR.2.1 TDD
Dedicated CORESET parameters, Test 2	$Config_{SCell1}$ 1		CCR.1.5 FDD
	$Config_{SCell1}$ 2		CCR.1.5 TDD
	$Config_{SCell1}$ 3		CCR.2.3 TDD
OCNG Patterns			OP.1
SSB Configuration	$Config_{SCell1}$ 1,2		SSB.1 FR1
	$Config_{SCell1}$ 3		SSB.2 FR1
SMTC Configuration			SMTC.1
TRS Configuration	$Config_{SCell1}$ 1		TRS.1.1 FDD
	$Config_{SCell1}$ 2		TRS.1.1 TDD
	$Config_{SCell1}$ 3		TRS.1.2 TDD
Antenna Configuration			1x2
Propagation Condition			AWGN
EPRE ratio of PSS to SSS			

EPRE ratio of PBCH DMRS to SSS		dB	0
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} Note 2		dBm/15 kHz	-104
SS-RSRP Note 3		dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	$Config_{SCell1}$ 1,2	dBm/9.36MHz	-59
	$Config_{SCell1}$ 3	dBm/38.16MHz	-61.9

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].

Table A.4.5.6.4.2.1-5: NR Cell specific test parameters for NR SCell (Cell 4) for Dormant BWP switch in synchronous EN-DC

Parameter		Unit	Cell 4
Frequency Range			FR1
Duplex mode	$Config_{SCell2}$ 1		FDD
	$Config_{SCell2}$ 2,3		TDD
TDD configuration	$Config_{SCell2}$ 1		Not Applicable
	$Config_{SCell2}$ 2		TDDConf.1.1
	$Config_{SCell2}$ 3		TDDConf.1.2
$BW_{channel}$	$Config_{SCell2}$ 1		10 MHz: $N_{RB,c}$ = 52
	$Config_{SCell2}$ 2		10 MHz: $N_{RB,c}$ = 52
	$Config_{SCell2}$ 3		40 MHz: $N_{RB,c}$ = 106
Active BWP ID			1,2
Initial BWP Configuration	$Config_{SCell2}$ 1		N/A
	$Config_{SCell2}$ 2		
	$Config_{SCell2}$ 3		
Active BWP-0 Configuration	$Config_{SCell2}$ 1		N/A
	$Config_{SCell2}$ 2		
	$Config_{SCell2}$ 3		
Active BWP-1 Configuration	$Config_{SCell2}$ 1		DLBWP.1.1
	$Config_{SCell2}$ 2		
	$Config_{SCell2}$ 3		
Active BWP-2 Configuration	$Config_{SCell2}$ 1		DLBWP.1.3
	$Config_{SCell2}$ 2		
	$Config_{SCell2}$ 3		
PDSCH Reference measurement channel	$Config_{SCell2}$ 1		SR.1.1 FDD
	$Config_{SCell2}$ 2		SR.1.1 TDD
	$Config_{SCell2}$ 3		SR.2.1 TDD
RMSI CORESET parameters	$Config_{SCell2}$ 1		CR.1.1 FDD
	$Config_{SCell2}$ 2		CR.1.1 TDD
	$Config_{SCell2}$ 3		CR.2.1 TDD
Dedicated CORESET parameters, Test 1	$Config_{SCell2}$ 1		CCR.1.1 FDD
	$Config_{SCell2}$ 2		CCR.1.1 TDD

	$Config_{SCell2}$ 3		CCR.2.1 TDD
Dedicated CORESET parameters, Test 2	$Config_{SCell2}$ 1		CCR.1.5 FDD
	$Config_{SCell2}$ 2		CCR.1.5 TDD
	$Config_{SCell2}$ 3		CCR.2.3 TDD
OCNG Patterns			OP.1
SSB Configuration	$Config_{SCell2}$ 1,2		SSB.1 FR1
	$Config_{SCell2}$ 3		SSB.2 FR1
SMTC Configuration			SMTC.1
TRS Configuration	$Config_{SCell2}$ 1		TRS.1.1 FDD
	$Config_{SCell2}$ 2		TRS.1.1 TDD
	$Config_{SCell2}$ 3		TRS.1.2 TDD
Antenna Configuration			1x2
Propagation Condition			AWGN
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} Note 2		dBm/15 kHz	-104
SS-RSRP Note 3		dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	$Config_{SCell2}$ 1,2	dBm/9.36MHz	-59
	$Config_{SCell2}$ 3	dBm/38.16MHz	-61.9

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].

A.4.5.6.4.2.2 Test Requirements

During T1, the UE shall be able to to send the ACK/NACK for all SCells before UE PDCCH indicating entering dormant BWP is received in PSCell's slot # denoted.

During T3, the UE shall start to send the ACK/NACK for all SCells from the first UL slot that occurs after the beginning of DL slot ($j+N$).

Where, N is the timing that UE provide HARQ-ACK information in response to a detection of a DCI format 1_1 indicating SCell dormancy as specified in [3].

All of the above test requirements shall be fulfilled in order for the observed SCell dormant BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

During T1, the start of the interruption of PCell during SCell active BWP switch shall not happen outside the BWP switch delay.

During T3, the start of the interruption of PCell during SCell active BWP switch shall not happen outside the BWP switch delay.

During T1, the start of the interruption of PSCell during SCell active BWP switch shall not happen outside the BWP switch delay.

During T3, the start of the interruption of PSCell during SCell active BWP switch shall not happen outside the BWP switch delay.

The interruption of PCell shall not be longer than the interruption duration specified for active BWP switch in clause 7.32.2.7 of TS 36.133 [15].

The interruption of PSCell shall not be longer than the interruption duration specified for dormant BWP switch in clause 8.6.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK/NACK in the first DL slot that occurs after the beginning of DL slot ($i+N$), ($j+N$), then the UE shall use the next available uplink resource for reporting the corresponding ACK/NACK.

A.4.5.6.5 SCell dormancy switch

A.4.5.6.5.1 E-UTRAN – NR FR1 PSCell SCell dormancy switch of single FR1 SCell outside active time

A.4.5.6.5.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement on multiple CCs for RRC-based BWP switch defined in clause 8.6.3A.1. Supported test configurations for LTE PCell and NR PSCell are shown in Table A.4.5.6.5.1.1-1. Supported test configurations for NR SCell are shown in Table A.4.5.6.5.1.1-1A. Test configuration for LTE PCell and NR PSCell and test configuration for NR SCell are chosen independently.

The test scenario comprises of one E-UTRA PCell (Cell 1), one NR PSCell (Cell 2) and one NR SCell(Cell 3) as given in Table A.4.5.6.5.1.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell and NR SCell are specified in Table A.4.5.6.5.1.1-3 and Table A.4.5.6.5.1.1-4 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) and PSCell (Cell 2) to ensure that the UE will have ACK/NACK sending.

PDCCHs indicating new transmissions shall be sent continuously on SCell (Cell 3) to ensure that the UE would have ACK/NACK sending except for the time duration when the SCell is in dormancy during T2.

The UE is configured to monitor PDCCH for DCI format 2_6 at *ps-Offset* before the start of *onDuration*. Two tests are specified, where a UE that only supports triggering within the first three OFDM symbols of a slot shall undergo Test1 only, and a UE that supports triggering also in remaining OFDM symbols of a slot shall undergo both Test1 and Test2. In the tested scenario, *ps-Offset* is selected to correspond to the dormancy switching time specified in clause 8.6.2A.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), Cell 2 (PSCell) on radio channel 2 (PSCC) and Cell 3 (SCell) on radio channel 3 (SCC).

- UE is configured with 1 UE-specific downlink bandwidth parts the same as initial BWP for PSCell, BWP-1 in Cell 3 before starting the test.

- UE is configured with 2 different UE-specific downlink bandwidth parts for SCell, BWP-1 and BWP-2, in Cell 3 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB. BWP-1 is configured in *OutsideActiveTimeConfig* as *firstOutsideActiveTimeBWP*. BWP-2 is configured as *dormantBWP*.
- UE is configured with RRM measurement on SCC.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in PSCell.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in SCell.
- UE is configured to monitor DCI format 2_6, and to be active during onDuration even when no DCI format 2_6 is detected (ps-WakeUp).

All cells have constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

Time period T1 starts when a DCI format 2_6 command for SCell switch from non-dormany to dormancy, sent from the test equipment to the UE, is received at the UE side at *ps-Offset* before *onDuration*. The UE shall switch its SCell bandwidth part from BWP-1 to BWP-2 into dormancy. During T1, test equipement verifies that:

The UE shall be able to receive CSI-RS on SCell BWP-2 at the beginning of the DL slot right after SCell's DL slot ($i+T_{dormantBWPswitchDelay}$) as defined in clause 8.6. TE shall observe the periodic reporting of CQI for SCell starting from slot ($i+T_{dormantBWPswitchDelay}$).

PCell (Cell 1) interruption due to dormancy switch on SCell shall occur within the dormancy switch delay.

PSCell (Cell 2) interruption due to dormancy switch on SCell shall occur within the dormancy switch delay.

Time period T2 starts when T1 is completed. During T2, the test equipment continues to schedule the UE continuously in PCell and PSCell. The UE shall carry out CSI and RRM measurements on the dormant SCells. The UE shall report ACK/NACK in PCell and PSCell in response to scheduled PDSCH, with the maximum loss of transmitted ACK/NACKs fulfilling the requirement in clause 8.2.1.2.15. The test equipment verifies that the loss of ACK/NACKs is no larger than 1.5%.

Time period T3 starts when T2 is completed. During T3, the test equipment does not schedule the UE, by which the inactivity timer expires and the UE stops monitoring PDCCH except for signalling using DCI format 2_6 at wake-up signalling occasions.

Time period T4 starts when the UE at *ps-Offset* before *onDuration* detects a DCI format 2_6 carrying dormancy indication that indicates that SCell1 and SCell2 are to be switched from dormancy to non-dormancy. During T4, the test equipment schedules the UE with new data indication in PCell, PSCell and SCell during *onDuration.* The test equipment verifies that:

The UE shall be able to receive PDSCH at the beginning of the DL slot right after PSCell's DL slot ($j+T_{dormantBWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the SCell at latest at the beginning of the DL slot right after slot ($j+T_{dormantBWPswitchDelay}+k1$). The UE shall be continuously scheduled on SCell's BWP-1 starting from the beginning of the DL slot right after slot ($j+T_{dormantBWPswitchDelay}$).

PCell (Cell 1) interruption due to dormancy switch on SCell shall occur within the dormancy switch delay.

PSCell (Cell 2) interruption due to dormancy switch on SCell shall occur within the dormancy switch delay.

able A.4.5.6.5.1.1-1: DL BWP switch supported test configurations for LTE PCell and NR PSCell

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode

3	LTE FDD, NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration	

Table A.4.5.6.5.1.1-1A: DL BWP switch supported test configurations for NR SCell

$Config_{SCell}$	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration	

Table A.4.5.6.5.1.1-2: General test parameters for DL BWP switch in synchronous EN-DC

Parameter	Unit	Value		Comment
		Test1	Test2	
E-UTRA RF Channel Number		1		One E-UTRA radio channel is used for this test
NR RF Channel Number		2, 3		Two NR radio channel is used for this test
Active PCell		Cell 1		PCell on RF channel number 1.
Active PSCell		Cell 2		PSCell on RF channel number 2.
Active SCell		Cell 3		SCell on RF channel number 3.
CP length		Normal		
CSI reporting periodicity, Non-dormant BWP	ms	2		CSI reporting periodicity for periodic reporting of CQI for PCell and non-dormant SCells
CSI reporting periodicity, Dormant BWP	ms	40		CSI reporting periodicity for periodic reporting of CQI for dormant SCells
ps-Offset		Depending on UE capability		Monitoring of DCI 2_6 ahead of start of drx-onDurationTimer. Value of ps-Offset shall correspond to SCell dormancy switching time for switching of two SCells, as specified in clause 8.6.2A. Actual value depends on reported UE capabilities.
ps-WakeUp		true		Wake up for onDuration in case DCI format 2_6 is not detected.
DRX		DRX.1		
'bwp-InactivityTimer	ms	200		
Cell-individual offset for cells on RF channel number 1	dB	0		Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0		Individual offset for cells on PSCC.
Cell-individual offset for cells on RF channel number 3	dB	0		Individual offset for cells on SCC.
Cell2 timing offset to cell1	µs	3		Synchronous EN-DC
Cell3 timing offset to cell2	µs	3		Synchronous cells
Number of CSI-RS ports		4		The number of CSI-RS ports in a single resource without CRI report

OFDM symbol range in slot for transmission of DCI with dormancy indication		0 – 2	3 – 11	Test1 is based on that triggering DCI is received within the first three OFDM symbols of a slot. Test2 is based on that the triggering DCI is received later than within the first three OFDM symbols of a slot.
T1	s	[10		
T2	s	0.2		
T3	s	0.2		
T4	s	[10		

Table A.4.5.6.5.1.1-3: NR Cell specific test parameters for NR PSCell for DL BWP switch in synchronous EN-DC

Parameter			Unit	Cell 2
Frequency Range				FR1
Duplex mode		Config 1,4		FDD
		Config 2,3,5,6		TDD
TDD configuration		Config 1,4		Not Applicable
		Config 2,5		TDDConf.1.1
		Config 3,6		TDDConf.1.2
$BW_{channel}$		Config 1,4		10 MHz: $N_{RB,c}$ = 52
		Config 2,5		10 MHz: $N_{RB,c}$ = 52
		Config 3,6		40 MHz: $N_{RB,c}$ = 106
Active DL BWP ID				1
Initial DL BWP Configuration		Config 1,4		DLBWP.0.2
		Config 2,5		
		Config 3,6		
Initial UL BWP Configuration		Config 1,4		ULBWP.0.2
		Config 2,5		
		Config 3,6		
Initial Condition	Active DL BWP-1 Configuration	Config 1,4		DLBWP.1.3
		Config 2,5		
		Config 3,6		
	Active UL BWP-1 Configuration	Config 1,4		ULBWP.1.3
		Config 2,5		
		Config 3,6		
Final Condition	Active DL BWP-1 Configuration	Config 1,4		DLBWP.1.1
		Config 2,5		
		Config 3,6		
	Active UL BWP-1 Configuration	Config 1,4		ULBWP.1.1
		Config 2,5		
		Config 3,6		
PDSCH Reference measurement channel		Config 1,4		SR.1.1 FDD
		Config 2,5		SR.1.1 TDD
		Config 3,6		SR2.1 TDD
RMSI CORESET parameters		Config 1,4		CR.1.1 FDD
		Config 2,5		CR.1.1 TDD
		Config 3,6		CR2.1 TDD
Dedicated CORESET parameters		Config 1,4		CCR.1.1 FDD
		Config 2,5		CCR.1.1 TDD
		Config 3,6		CCR.2.1 TDD
OCNG Patterns				OP.1
SSB Configuration		Config 1,2,4,5		SSB.1 FR1
		Config 3,6		SSB.2 FR1
SMTC Configuration				SMTC.1
TRS Configuration		Config 1,4		TRS.1.1 FDD
		Config 2,5		TRS.1.1 TDD
		Config 3,6		TRS.1.2 TDD

Antenna Configuration			1x2
Propagation Condition			AWGN
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} Note 2		dBm/15 kHz	[-104]
SS-RSRP Note 3		dBm/15 kHz	[-87]
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	Config 1,2,4,5	dBm/ 9.36MHz	[-59]
	Config 3,6	dBm/ 38.16MHz	[-61.9]

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].

Table A.4.5.6.5.1.1-4: NR Cell specific test parameters for NR SCell for DL BWP switch in synchronous EN-DC

Parameter			Unit	Cell 3
Frequency Range				FR1
Duplex mode		$Config_{SCell}$ 1		FDD
		$Config_{SCell}$ 2,3		TDD
TDD configuration		$Config_{SCell}$ 1		Not Applicable
		$Config_{SCell}$ 2		TDDConf.1.1
		$Config_{SCell}$ 3		TDDConf.1.2
$BW_{channel}$		$Config_{SCell}$ 1		10 MHz: $N_{RB,c}$ = 52
		$Config_{SCell}$ 2		10 MHz: $N_{RB,c}$ = 52
		$Config_{SCell}$ 3		40 MHz: $N_{RB,c}$ = 106
Active DL BWP ID				1
Initial DL BWP Configuration		$Config_{SCell}$ 1		DLBWP.0.2
		$Config_{SCell}$ 2		
		$Config_{SCell}$ 3		
Initial UL BWP Configuration		$Config_{SCell}$ 1		ULBWP.0.2
		$Config_{SCell}$ 2		
		$Config_{SCell}$ 3		
Initial Condition	Active DL BWP-1 Configuration	$Config_{SCell}$ 1		DLBWP.1.3
		$Config_{SCell}$ 2		
		$Config_{SCell}$ 3		
	Active UL BWP-1 Configuration	$Config_{SCell}$ 1		ULBWP.1.3
		$Config_{SCell}$ 2		
		$Config_{SCell}$ 3		
Final Condition	Active DL BWP-1 Configuration	$Config_{SCell}$ 1		DLBWP.1.1
		$Config_{SCell}$ 2		
		$Config_{SCell}$ 3		

	Active UL BWP-1 Configuration	$Config_{SCell}$ 1		ULBWP.1.1
		$Config_{SCell}$ 2		
		$Config_{SCell}$ 3		
PDSCH Reference measurement channel		$Config_{SCell}$ 1		SR.1.1 FDD
		$Config_{SCell}$ 2		SR.1.1 TDD
		$Config_{SCell}$ 3		SR2.1 TDD
RMSI CORESET parameters		$Config_{SCell}$ 1		CR.1.1 FDD
		$Config_{SCell}$ 2		CR.1.1 TDD
		$Config_{SCell}$ 3		CR2.1 TDD
Dedicated CORESET parameters		$Config_{SCell}$ 1		CCR.1.1 FDD
		$Config_{SCell}$ 2		CCR.1.1 TDD
		$Config_{SCell}$ 3		CCR.2.1 TDD
OCNG Patterns				OP.1
SSB Configuration		$Config_{SCell}$ 1,2		SSB.1 FR1
		$Config_{SCell}$ 3		SSB.2 FR1
SMTC Configuration				SMTC.1
TRS Configuration		$Config_{SCell}$ 1		TRS.1.1 FDD
		$Config_{SCell}$ 2		TRS.1.1 TDD
		$Config_{SCell}$ 3		TRS.1.2 TDD
Antenna Configuration				1x2
Propagation Condition				AWGN
EPRE ratio of PSS to SSS			dB	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
N_{oc} Note 2			dBm/15 kHz	[-104]
SS-RSRP Note 3			dBm/15 kHz	[-87]
$\hat{E}_s/I_{ot}$			dB	17
$\hat{E}_s/N_{oc}$			dB	17
Io Note3		$Config_{SCell}$ 1,2	dBm/ 9.36MHz	[-59]
		$Config_{SCell}$ 3	dBm/ 38.16MHz	[-61.9]

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].

A.4.5.6.5.1.2 Test Requirements

During T1, any interruption on PCell and PSCell due to dormancy switching of SCell shall be within the requirement specified in in clause 8.2.1.2.15.1 for NR victim cell, and clause 7.32.2.14.1 of 36.133 [15] for E-UTRA victim cell. Starting from *onDuration* in time period T1, the UE shall transmit ACK/NACK in response to scheduling in PCell and PSCell. There shall be no loss of ACK/NACK.

During time period T2, the UE shall transmit ACK/NACKs in response to scheduling in PCell and the rate of missed ACK/NACKs shall be no more than 1.5%.

During T1, any interruption on PCell and PSCell due to dormancy switching of SCell shall be within the requirement specified in in clause 8.2.1.2.15.1 for NR victim cell, and clause 7.32.2.14.1 of 36.133 [15] for E-UTRA victim cell. Starting from *onDuration* in time period T4, the UE shall transmit ACK/NACK in response to scheduling in PCell, SCell1 and SCell2. There shall be no loss of ACK/NACK.

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.6.5.2 E-UTRAN – NR FR1 PSCell SCell dormancy switch of two FR1 SCells inside active time

A.4.5.6.5.2.1 Test Purpose and Environment

The purpose of this test is to verify the delay requirement of BWP switching from dormancy to non-dormancy and from non-dormancy to dormancy on SCell defined in clause 8.6.2, and interruption requirements for NR victim cell defined in clause 8.2.1.2.15 and interruption requirement for E-UTRA victim cell defined in clause 7.32.2.7 of TS 36.133 [15]. Supported test configurations are shown in Table A.4.5.6.5.2.1-1.

The test scenario comprises of one E-UTRA PCell (Cell 1), one NR PSCell (Cell 2) and two NR SCells (Cell 3, and Cell 4) as given in Table A.4.5.6.5.2.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell and SCells are specified in Table A.4.5.6.5.2.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) and PSCell (Cell 2) to ensure that the UE will have ACK/NACK sending.

PDCCHs indicating new transmissions shall be sent continuously on SCell (Cell 3, and Cell 4) to ensure that the UE would have ACK/NACK sending except for the time duration when SCell (Cell2) performs the dormancy switching and stays in the dormant BWP.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), Cell 2 (PSCell) on radio channel 2 (PSCC),, Cell 3 (SCell) on radio channel 3 (SCC) and Cell 4 (SCell) on radio channel 4 (SCC).
- UE is configured with 1 UE-specific downlink bandwidth parts the same as initial BWP for PSCell, BWP-0, in Cell 2 before starting the test. BWP-0 always include bandwidth of the initial DL BWP and SSB.
- UE is configured with 2 UE-specific downlink bandwidth parts for SCell, BWP-1 and BWP-2 in Cell 3 and Cell 4 before starting the test.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-0 in PSCell.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in all SCells.
- UE is indicated in *dormantBWP -Id* that the dormant BWP is BWP-2 in all SCells.

All cells have constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

> Time period T1 starts when a DCI format 1_1 command for enterning dormant BWP in SCell, sent from the test equipment to the UE, is received at the UE side in PCell's slot # denoted *i*. Upon reception of the PDCCH indicating entering dormant BWP in PCell, UE shall switch the DL BWP-1 to DL BWP-2 in all SCells, i.e., switching from non-dormant BWP to dormant BWP.
>
> The UE shall be able to receive PDSCH and report valid ACK/NACK on the PCell and PSCell all the time except interruption.

The starting time of PCell (Cell 1) interruption due to dormancy switching on SCells shall occur within the dormant BWP switch delay.

The starting time of PSCell (Cell 2) interruption due to dormancy switching on SCells shall occur within the dormant BWP switch delay.

During T2, the test equipment won't transmit DCI format for PDSCH reception on all SCells.

The UE shall be able to receive PDSCH and report valid ACK/NACK on the PCell and PSCell all the time except interruption.

During T3,

Time period T3 starts when a DCI format 1_1 command for leaving dormant BWP in SCells, sent from the test equipment to the UE, is received at the UE side in PSCell's slot # denoted *j*. Upon reception of the PDCCH indicating leaving dormant BWP in PSCell, UE shall switch the DL BWP-2 to DL BWP-1 in SCells, i.e., switching from dormant BWP to non-dormant BWP.

The UE shall be able to receive PDSCH on all SCells no later than the first DL slot that occurs after the beginning of PSCell's DL slot ($j+ T_{mutipledormantBWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK on all SCells no later than the first UL slot that occurs after the beginning of slot ($j+N$) as defined in clause 10.3 in TS38.213.

The UE shall be able to receive PDSCH and report valid ACK/NACK on the PCell and PSCell all the time except interruption.

The starting time of PCell (Cell 1) interruption due to dormancy switching on SCells shall occur within the dormant BWP switch delay.

The starting time of PSCell (Cell 2) interruption due to dormancy switching on SCells shall occur within the dormant BWP switch delay.

The test equipment verifies that potential interruption to E-UTRA PCell and NR PSCell is carried out in the correct time span by monitoring ACK/NACK sent in PCell and PSCell during dormant BWP switch of SCells, respectively.

Table A.4.5.6.5.2.1-1: Dormant BWP switch supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: A UE which fulfils the requirements in the test case in current clause A.4.5.6.5.2 can skip the test cases in clause A.4.5.6.5.1. Note 3: NR configuration is the same for PSCell and SCells.	

Table A.4.5.6.5.2.1-2: General test parameters for Dormant BWP switch in synchronous EN-DC

Parameter	Unit	Value		Comment
		Test 1	Test 2	
E-UTRA RF Channel Number		1		One E-UTRA radio channel is used for this test
NR RF Channel Number		2, 3, 4		Three NR radio channels are used for this test
Active PCell		Cell 1		PCell on RF channel number 1.
Active PSCell		Cell 2		PSCell on RF channel number 2.

Active SCell		Cell 3	SCell on RF channel number 3.
Active SCell		Cell 4	SCell on RF channel number 4.
CP length		Normal	
DRX		OFF	
bwp-InactivityTimer	ms	200	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell-individual offset for cells on RF channel number 3	dB	0	Individual offset for cells on SCC.
Cell2 timing offset to cell1	µs	3	Synchronous EN-DC
Cell3 timing offset to cell2	µs	3	Synchronous cells
Cell4 timing offset to cell2	µs	3	Synchronous cells
OFDM symbol range in slot for transmission of DCI with dormancy indication		0 – 2 | 3 – 11	
T1	s	0.2	
T2	s	0.2	
T3	s	0.2	

Table A.4.5.6.5.2.1-3: NR Cell specific test parameters for Dormant BWP switch in synchronous EN-DC

Parameter		Unit	Cell 2	Cell 3	Cell 4
Frequency Range			FR1		
Duplex mode	Config 1,4		FDD		
	Config 2,3,5,6		TDD		
TDD configuration	Config 1,4		Not Applicable		
	Config 2,5		TDDConf.1.1		
	Config 3,6		TDDConf.1.2		
$BW_{channel}$	Config 1,4		10 MHz: $N_{RB,c}$ = 52		
	Config 2,5		10 MHz: $N_{RB,c}$ = 52		
	Config 3,6		40 MHz: $N_{RB,c}$ = 106		
Active BWP ID			0	1, 2	
Initial BWP Configuration	Config 1,4		DLBWP.0.2	NA	
	Config 2,5				
	Config 3,6				
Active BWP-0 Configuration	Config 1,4		DLBWP.0.2	NA	
	Config 2,5				
	Config 3,6				
Active BWP-1 Configuration	Config 1,4		NA	DLBWP.1.1	
	Config 2,5				
	Config 3,6				
Active BWP-2 Configuration	Config 1,4		NA	DLBWP.1.3	
	Config 2,5				
	Config 3,6				
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD		
	Config 2,5		SR.1.1 TDD		
	Config 3,6		SR2.1 TDD		
RMSI CORESET parameters	Config 1,4		CR.1.1 FDD		
	Config 2,5		CR.1.1 TDD		
	Config 3,6		CR2.1 TDD		
Dedicated CORESET parameters, Test 1	Config 1,4		CCR.1.1 FDD		
	Config 2,5		CCR.1.1 TDD		
	Config 3,6		CCR.2.1 TDD		
Dedicated CORESET parameters, Test 2	Config 1,4		CCR.1.5 FDD		
	Config 2,5		CCR.1.5 TDD		

	Config 3,6		CCR.2.3 TDD	
OCNG Patterns			OP.1	
SSB Configuration	Config 1,2,4,5		SSB.1 FR1	
	Config 3,6		SSB.2 FR1	
SMTC Configuration			SMTC.1	
TRS Configuration	Config 1,4		TRS.1.1 FDD	
	Config 2,5		TRS.1.1 TDD	
	Config 3,6		TRS.1.2 TDD	
Antenna Configuration			1x2	
Propagation Condition			AWGN	
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
N_{oc} Note 2		dBm/15 kHz	-104	-104
SS-RSRP Note 3		dBm/15 kHz	-87	-87
$\hat{E}_s/I_{ot}$		dB	17	17
$\hat{E}_s/N_{oc}$		dB	17	17
Io Note3	Config 1,2,4,5	dBm/9.36MHz	-59	-59
	Config 3,6	dBm/38.16MHz	-61.9	-61.9

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].

A.4.5.6.5.2.2 Test Requirements

During T1, the UE shall be able to to send the ACK/NACK for all SCells before UE PDCCH indicating entering dormant BWP is received in PSCell's slot # denoted.

During T3, the UE shall start to send the ACK/NACK for all SCells from the first UL slot that occurs after the beginning of DL slot ($j+N$).

Where, N is the timing that UE provide HARQ-ACK information in response to a detection of a DCI format 1_1 indicating SCell dormancy as specified in [3].

All of the above test requirements shall be fulfilled in order for the observed SCell dormant BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

During T1, the start of the interruption of PCell during SCell active BWP switch shall not happen outside the BWP switch delay.

During T3, the start of the interruption of PCell during SCell active BWP switch shall not happen outside the BWP switch delay.

During T1, the start of the interruption of PSCell during SCell active BWP switch shall not happen outside the BWP switch delay.

During T3, the start of the interruption of PSCell during SCell active BWP switch shall not happen outside the BWP switch delay.

The interruption of PCell shall not be longer than the interruption duration specified for active BWP switch in clause 7.32.2.7 of TS 36.133 [15].

The interruption of PSCell shall not be longer than the interruption duration specified for dormant BWP switch in clause 8.6.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK/NACK in the first DL slot that occurs after the beginning of DL slot ($i+N$), ($j+N$), then the UE shall use the next available uplink resource for reporting the corresponding ACK/NACK.

A.4.5.7 PSCell addition and release delay

A.4.5.7.1 Addition and Release Delay of known NR PSCell

A.4.5.7.1.1 Test purpose and environment

The purpose of this test is to verify that the NR PSCell addition and release delays under EN-DC are within the requirements stated in clause 7.31.2 [15] for the case when the PSCell is known by the UE at the time of addition.

Supported test configurations are shown in A.4.5.7.1.1-1. The test parameters for the E-UTRA cell are given in Table A.3.7.2.1-1. The E-UTRA cell once set up is not changed across time.

The test parameters for NR cell are given in Tables A.4.5.7.1.1-2 and cell-specific parameters in A.4.5.7.1.1-3 below. The test consists of six successive time periods with duration of T1, T2, T3, T4, T5 and T6 respectively. There are two carriers each with one cell. Before the test starts the UE is connected to Cell 1 (E-UTRA PCell) on radio channel 1 (PCC) but is not aware of Cell 2 (NR PSCell) on radio channel 2. The UE is only monitoring the PCC. During T1 only Cell1 is known to the UE.

Before the start of T2, the UE in the measurement control information that event-triggered reporting with Event B1 is configured for neighbour cell (Cell2). Before the start of T2 the UE is configured with the measurement gaps (gap pattern Id # 0). The Cell2 becomes known to the UE during T2. Therefore, during T2 the UE shall report Event B1. The point in time at which the RRC message to release measurement gap is transmitted from the test system defines the start of period T3. During T3, after measurement gap is released, the test system transmits the RRC message to the UE to add PSCell on radio channel 2.

The RRC message (to add PSCell) also includes a request for the UE to start periodic CSI reporting for the PSCell after the PSCell has been successfully added. The point in time at which the RRC message to add PSCell (Cell2) is received at the UE antenna connector defines the start of period T4.

The test system shall observe the periodic reporting of CSI for PSCell during T5. The point in time at which the UE has sent PRACH to the PSCell (Cell 2) defines the start of period T5.

The test system shall send a RRC message to the UE to release PSCell (Cell 2) on radio channel 2. The RRC message to release PSCell (Cell2) shall be sent to the UE during period T5, after the UE has sent at least one CQI report with non-zero CQI index for PSCell (Cell 2). The point in time at which the RRC message to release PSCell (Cell2) is received at the UE antenna connector defines the start of period T6.

Table A.4.5.7.1.1-1: Supported test configurations for FR1 PSCell

Configuration	Description
1	LTE FDD, NR SCS 15 kHz, BW 10 MHz, FDD
2	LTE FDD, NR SCS 15 kHz, BW 10 MHz, TDD
3	LTE FDD, NR SCS 30 kHz, BW 40 MHz, TDD
4	LTE TDD, NR SCS 15 kHz, BW 10 MHz, FDD

5	LTE TDD, NR SCS 15 kHz, BW 10 MHz, TDD
6	LTE TDD, NR SCS 30 kHz, BW 40 MHz, TDD
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.4.5.7.1.1-2: General Test Parameters for PSCell Addition and Release

Parameter		Unit	Value	Comment
RF Channel Number			1, 2	Two radio channels are used for this test. One for E-UTRA cell and second for NR Cell
Initial	Active PCell		Cell1	PCell on RF channel number 1.
	Neighbour cell		Cell2	Neighbour cell on RF channel number 2.
Final Condition	Active PCell		Cell1	PCell on RF channel number 1.
	Neighbour Cell		Cell2	PSCell released on RF channel number 2.
B1	Hysteresis	dB	0	Hysteresis for evaluation of event B1.
	Threshold RSRP	dBm	-93	Actual RSRP threshold for event B1. Needs to take absolute accuracy tolerance in clause 9.1.11.1 into account plus margin.
	Time to Trigger	S	0	
DRX			OFF	Continuous monitoring of primary cell
Measurement gap pattern Id			0	Gaps are configured before T2 and released before T3.
PRACH configuration on cell2			FR1 PRACH configuration 1	Captured in A.3.8.2.1
Cell-individual offset for cells on RF channel number 1		dB	0	Individual offset for cells on primary component carrier.
Cell-individual offset for cells on RF channel number 2		dB	0	Individual offset for cells on carrier frequency of cell2.
T1		s	1	During this time the PCell shall be known and cell2 shall be unknown.
T2		s	1.5	During this time the UE shall identify neighbour cell (cell2) and report event B1.
T3		s	3	During this time the test system transmits the RRC messages to release measurement gap and add PSCell.
T4		s	0.5	During this time the UE adds the PSCell.
T5		s	0.5	During this time the UE sends CSI reports for PSCell.
T6		s	0.5	During this time the UE releases the PSCell.

Table A.4.5.7.1.1-3: Cell Specific Parameters for PSCell Addition and Release

Parameter	Unit	Config	Test					
			T1	T2	T3	T4	T5	T6
E-UTRA RF Channel Number		1,2,3,4,5,6	1					
NR RF Channel Number		1,2,3,4,5,6	2					
TDD configuration		1,4	Not Applicable					
		2,5	TDDConf.1.1					
		3,6	TDDConf.2.1					
$BW_{channel}$	MHz	1,4	10: $N_{RB,c}$ = 52					
		2,5	10: $N_{RB,c}$ = 52					
		3,6	40: $N_{RB,c}$ = 106					
Initial BWP Configuration		1,2,3	DLBWP.0.1 ULBWP.0.1					
Dedicated BWP Configuration		1,2,3	DLBWP.1.1 ULBWP.1.1					

PDSCH Reference measurement channel		1,4	SR.1.1 FDD	
		2,5	SR.1.1 TDD	
		3,6	SR.2.1 TDD	
RMSI CORESET Reference Channel		1,4	CR.1.1 FDD	
		2,5	CR.1.1 TDD	
		3,6	CR.2.1 TDD	
Dedicated CORESET Reference Channel		1,4	CCR.1.1 FDD	
		2,5	CCR.1.1 TDD	
		3,6	CCR.2.1 TDD	
OCNG Patterns		1,2,3,4,5,6	OP.1	
SSB configuration		1,2,4,5	SSB.1 FR1	
		3,6	SSB.2 FR1	
SMTC configuration		1,2,4,5	SMTC.1	
		3,6	SMTC.1	
TRS Configuration		1,4	TRS.1.1 FDD	
		2,5	TRS.1.1 TDD	
		3,6	TRS.1.2 TDD	
CSI-RS configuration for CSI reporting		1,4	CSI-RS.1.1 FDD	
		2,5	CSI-RS.1.1 TDD	
		3,6	CSI-RS.2.1 TDD	
reportConfigType		1,2,3,4,5,6	periodic	
reportQuantity		1,2,3,4,5,6	cri-RI-PMI-CQI	
CSI reporting periodicity	slot	1,2,4,5	5	
		3,6	10	
CSI reporting offset	slot	1,2,4,5	2	
		3,6	4	
EPRE ratio of PSS to SSS	dB	1,2,3,4,5,6	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	dBm/15 kHz	1,2,3,4,5,6	N/A	-85
N_{oc} Note2	dBm/SCS	1,2,4,5	N/A	-85
		3,6	N/A	-82
$\hat{E}_s/I_{ot}$		1,2,3,4,5,6	-infinity	0
$\hat{E}_s/N_{oc}$		1,2,3,4,5,6	-infinity	0
SS-RSRP Note3	dBm/SCS	1,2,4,5	-infinity	-85
		3,6	-infinity	-82
Io Note3	dBm/9.36MHz	1,2,4,5	N/A	-57
	dBm/38.1MHz	3,6	N/A	-51
Propagation condition		1,2,3,4,5,6	AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				

Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.4.5.7.1.2 Test Requirements

The UE shall transmit the PRACH to PSCell no later than 82 ms[Note1] from the start of T4.

The UE shall send at least one CSI report for PSCell with non-zero CQI index during T5.

The UE shall periodically send CSI reports for PSCell after the UE has sent first CQI report with non-zero CQI index during T5.

The UE shall stop sending CSI reports for PSCell no later than 20ms from the start of T6.

All the above test requirements shall be fulfilled in order for the observed PSCell addition delay and PSCell release delay to be counted as correct. The rate of correct observed PSCell addition delay and PSCell release delay during repeated tests shall be at least 90%.

Note1: The PSCell addition delay can be expressed as follows as specified in clause 7.31.2 [15]:

$$T_{config_PSCell} = T_{RRC_delay} + T_{processing} + T_{search} + T_{\Delta} + T_{PSCell_DU} + 2ms$$

Where:

T_{RRC_delay} = 20ms

$T_{processing}$ = 20ms

T_{search} = 0

T_{Δ} = 20ms

T_{PSCell_DU} = 1*10+10 = 20ms

A.4.5.8 DL Interruptions at switching between two uplink carriers

A.4.5.8.1 Test Purpose and Environment

The purpose of this test is to verify DL interruption requirements during UE dynamic switching between two uplink carriers defined in clause 8.2.1.2.14. The test case is applicable for an uplink band pair of an inter-band EN-DC configuration when the capability *uplinkTxSwitchingPeriod* is present.

There are two cells: E-UTRAN FDD PCell (Cell 1), FR1 PSCell (Cell 2). The test parameters for PSCell are given in Table A. 4.5.8.1-1, Table A. 4.5.8.1-2 and Table A. 4.5.8.1-3 below.

Aperiodic CSI-RS for L1-RSRP reporting is triggered with power boosting 6dB on the following symbol on the special slot on NR TDD carrier (Cell 2):

symbol#10 if UE does not report uplinkTxSwitching-DL-Interruption-r16;

otherwise,

symbol#5 if UE capability *uplinkTxSwitchingPeriod* is 140us or

symbol #8 if UE capability *uplinkTxSwitchingPeriod* is 35us.

The test parameters and applicability for E-UTRAN FDD PCell are defined in A.3.7.2. The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, *uplinkTxSwitching* is indicated to UE. This test verifies that the UE correctly report the L1-RSRP reporting.

Table A. 4.5.8.1-1: Supported test configurations

Configuration	PSCell (Cell2)
1	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Table A. 4.5.8.1-2: General test parameters for DL Interruptions at switching between two uplink carriers in EN-DC

Parameter	Unit	Test configuration	Value	Comment
RF Channel Number		Config 1	1, 2	Two radio channels are used for the test.
Active cell		Config 1	Cell 1: E-UTRAN FDD PCell Cell 2: FR1 PSCell	E-UTRAN FDD PCell on RF channel number 1 FR1 PSCell on RF channel number 2
CP length		Config 1	Normal	
DRX		Config 1	OFF	
Measurement gap pattern Id		Config 1	OFF	
Filter coefficient		Config 1	0	L3 filtering is not used
CSI-RS configuration for L1-RSRP reporting		Config 1	CSI-RS.2.5 TDD	
T1	s	Config 1	5	

Table A. 4.5.8.1-3: NR Cell specific test parameters for DL Interruptions at switching between two uplink carriers in EN-DC (Cell 2)

Parameter		Unit	Cell2
Frequency Range			FR1
Duplex mode	Config 1		TDD
TDD configuration	Config 1		TDDConf.2.1 except that: S='11DL: 1GP:2UL'; *nrofDownlinkSymbols: 11* *nrofUplinkSymbols: 2*
$BW_{channel}$	Config 1		40 MHz: $N_{RB,c}$ = 106
Initial BWP Configuration	Config 1		DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.1
UL dedicated BWP configuration			ULBWP.1.1
SRS configuration			SRSConf.4 in Table A.4.5.8.1-4
PDSCH Reference measurement channel	Config 1		SR.2.1 TDD
RMSI CORESET parameters	Confiq 1		CR.2.1 TDD

Dedicated CORESET parameters	Config 1		CCR.2.1 TDD
OCNG Patterns			OP.1
SMTC Configuration			SMTC.1
SSB Configuration	Config 1		SSB.2 FR1
Correlation Matrix and Antenna Configuration			2x2 low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note 2		dBm/15 kHz	-104
SS-RSRP Note 3		dBm/SSB SCS	-84
CSI-RS RSRP Note6		dBm/SCS	-78
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
N_{oc} Note 2	Config 1	dBm/SCS	-101
Io Note3 on symbols without CSI-RS	Config 1	dBm/ 38.16MHz	-52.86
Io Note6 on symbols with CSI-RS	Config 1	dBm/ 38.16MHz	-50.5
Time offset to Cell1 Note 5		µs	0
Propagation Condition			AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Void
Note 5: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.
Note 6: CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.4.5.8.1-4: SRS Configuration for DL Interruptions at switching between two uplink carriers

	Field	SRSConf.4	Comments
SRS-ResourceSet	srs-ResourceSetId	0	
	srs-ResourceIdList	0	
	resourceType	Periodic	
	Usage	Codebook	
SRS-Resource	SRS-ResourceId	0	
	nrofSRS-Ports	Port2	
	transmissionComb	n2	
	combOffset-n2	0	
	cyclicShift-n2	0	

	resourceMapping startPosition	1	
	resourceMapping nrofSymbols	n2	
	resourceMapping repetitionFactor	n1	
	freqDomainPosition	0	
	freqDomainShift	0	
	freqHopping c-SRS	0	Matches $N_{RB,c}$
	freqHopping b-SRS	0	
	freqHopping b-hop	0	
	groupOrSequenceHopping	Neither	
	resourceType	Periodic	
	periodicityAndOffset-p	sl8, 3	Offset to align with DRx periodicity
	sequenceId	0	Any 10 bit number

A.4.5.8.2 Test Requirements

The UE behaviour follows the requirements defined in clause 8.2.1.2.14.

UE shall send L1-RSRP report while meeting the accuracy requirements defined in clause 10.1.19.2.

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.9 UE specific CBW change

A.4.5.9.1 UE specific CBW change on FR1 NR PSCell with non-DRX in synchronous EN- DC

A.4.5.9.1.1 Test Purpose and Environment

The purpose of this test is to verify the UE specific CBW change delay requirement defined in clause 8.13.1. Supported test configurations are shown in Table A.4.5.9.1.1-1.

The test scenario comprises of one E-UTRA PCell (Cell 1) and one NR PSCell (Cell 2) as given in Table A.4.5.9.1.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell are specified in Table A.4.5.9.1.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC) and to Cell 2 (PSCell) on radio channel 2 (PSCC).
- UE has bandwidth part BWP-1 in its RRC-configuration for Cell 1 (PSCell).

- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 of initial condition in PSCell.

- UE is indicated in *SCS-SpecificCarrier* that the active CBW is CBW-1 of initial condition in PSCell.

All cells have constant signal levels throughout the test.

The test consists of 1 time period, with duration of T1.

During T1,

Time period T1 starts when a *RRCReconfiguration* with updated CBW configuration, sent from the test equipment to the UE, is completely received at the UE side in PSCell's slot # denoted *i*. The UE shall reconfigure its CBW with the updated CBW of final condition (CBW-2).

The UE shall be able to receive PDSCH at the beginning of the DL slot right after PSCell's DL slot ($i+\frac{T_{RRCprocessingDelay}+T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$) as defined in clause 8.13.1 and be ready for the reception of uplink grant for the PSCell no later than at the beginning of the DL slot right after slot ($i+\frac{T_{RRCprocessingDelay}+T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$). The UE shall be continuously scheduled on PSCell's BWP-1 of CBW-1 starting from the beginning of the DL slot right after slot ($i+\frac{T_{RRCprocessingDelay}+T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$).

$T_{RRCprocessingDelay}$ and $T_{CBWchangeDelayRRC}$ are defined in clause 8.13.1.

The test equipment verifies the UE specific CBW change time in PSCell by counting the time from the time when the RRC Reconfiguration message including updated CBW configurationis sent till the time when RRC Reconfiguration Complete message is received.

Table A.4.5.9.1.1-1: UE specific CBW change supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.4.5.9.1.1-2: General test parameters for UE specific CBW change in synchronous EN-DC

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
CP length		Normal	
DRX		OFF	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell2 timing offset to cell1	μs	3	Synchronous EN-DC
T1	s	0.2	

A.4.5.9.1.1-3: NR Cell specific test parameters for UE specific CBW change in synchronous EN-DC

Parameter			Unit	Cell 2
Frequency Range				FR1
Duplex mode		Config 1,4		FDD
		Config 2,3,5,6		TDD
TDD configuration		Config 1,4		Not Applicable
		Config 2,5		TDDConf.1.1
		Config 3,6		TDDConf.1.2
$BW_{channel}$		Config 1,4		10 MHz: $N_{RB,c}$ = 52
		Config 2,5		10 MHz: $N_{RB,c}$ = 52
		Config 3,6		40 MHz: $N_{RB,c}$ = 106
Active DL BWP ID				0
Initial DL BWP Configuration (BWP-1) before and after UE specific CBW change		Config 1,4		DLBWP.0.2
		Config 2,5		
		Config 3,6		
Initial UL BWP (BWP-1) Configuration before and after UE specific CBW change		Config 1,4		ULBWP.0.2
		Config 2,5		
		Config 3,6		
Initial Condition	Active DL CBW Configuration (CBW-1)	Config 1,4		DLCBW.1.1
		Config 2,5		
		Config 3,6		
	Active UL CBW Configuration (CBW-1)	Config 1,4		ULCBW.1.1
		Config 2,5		
		Config 3,6		
Final Condition	Active DL CBW Configuration (CBW-2)	Config 1,4		DLCBW.1.2
		Config 2,5		
		Config 3,6		
	Active UL CBW Configuration (CBW-2)	Config 1,4		ULCBW.1.2
		Config 2,5		
		Config 3,6		
PDSCH Reference measurement channel		Config 1,4		SR.1.1 FDD
		Config 2,5		SR.1.1 TDD
		Config 3,6		SR2.1 TDD
RMSI CORESET parameters		Config 1,4		CR.1.1 FDD
		Config 2,5		CR.1.1 TDD
		Config 3,6		CR2.1 TDD
Dedicated CORESET parameters		Config 1,4		CCR.1.1 FDD
		Config 2,5		CCR.1.1 TDD
		Config 3,6		CCR.2.1 TDD
OCNG Patterns				OP.1
SSB Configuration		Config 1,2,4,5		SSB.1 FR1
		Config 3,6		SSB.2 FR1
SMTC Configuration				SMTC.1
TRS Configuration		Config 1,4		TRS.1.1 FDD
		Config 2,5		TRS.1.1 TDD
		Config 3,6		TRS.1.2 TDD
Antenna Configuration				1x2 low

Propagation Condition			AWGN
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note 2		dBm/15 kHz	-104
SS-RSRP Note 3		dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	Config 1,2,4,5	dBm/9.36MHz	-58.96
	Config 3,6	dBm/38.16MHz	-52.86
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].			

A.4.5.9.1.2 Test Requirements

During T1, the UE shall be ready for the reception of uplink grant for PSCell in the beginning of the DL slot right after slot ($i+\frac{T_{RRC processing Delay}+T_{CBW change Delay RRC}}{NR\ Slot\ length}$).

All of the above test requirements shall be fulfilled in order for the observed PSCell UE specific CBW change delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.10 PSCell activation and deactivation delay

A.4.5.10.1 PSCell activation and deactivation delay

A.4.5.10.1.1 Test purpose and environment

The purpose of this test is to verify that the NR PSCell activation and deactivation delay under EN-DC are within the requirements stated in clause 7.38 in TS 36.133 [15] for the case when UE configured with one deactivated SCG and when PScell in one SCG is being activated where the PSCell is known by the UE at the time of activation.

Supported test configurations are shown in A.4.5.10.1.1-1. The test parameters for the E-UTRA cell are given in Table A.3.7.2.2-1. The E-UTRA cell once set up is not changed across time.

The test parameters for NR cell are given in Tables A.4.5.10.1.1-2, cell-specific parameters in A.4.5.10.1.1-3 below. The test consists of four successive time periods with duration of T1, T2, T3 and T4. There are two carriers each with one cell. The UE is connected to Cell 1 (E-UTRA PCell) on radio channel 1 (PCC) and PSCell (Cell2) is in

deactivated state. During T1, both Cell1 and Cell2 are known to UE and UE performs measurement on deactivated PCell. Before the test starts the UE is configured RLM and BFD on deactivated PSCell. During T1, UE performs RLM and BFD on the deactivated PSCell and TCI state is known.

The test system shall send a RRC message to the UE to activate PSCell (Cell 2) on radio channel 2, where no any PSCell parameter is modified in the RRC message. The RRC message (to activate PSCell) also includes a request for the UE to transmit scheduling request on PUCCH for the PSCell after the PSCell has been successfully activated. The RRC message to activate PSCell shall be sent to the UE during period T1. The point in time at which the RRC message to activate PSCell (Cell2) is received at the UE antenna connector defines the start of period T2.

The test system shall observe the periodic reporting of CSI for PSCell during T3. The point in time at which the UE has sent scheduling request on PUCCH for PSCell (Cell 2) defines the start of period T3.

The test system shall send a RRC message to the UE to deactivate PSCell (Cell 2) on radio channel 2. The RRC message to deactivate PSCell (Cell2) shall be sent to the UE during period T3, after the UE has sent at least one CQI report with non-zero CQI index for PSCell (Cell 2). The point in time at which the RRC message to deativate PSCell (Cell2) is received at the UE antenna connector defines the start of period T4.

Table A.4.5.9.1.1-1: Supported test configurations for FR1 PSCell

Configuration	Description
1	LTE FDD, NR SCS 15 kHz, BW 10 MHz, FDD
2	LTE FDD, NR SCS 15 kHz, BW 10 MHz, TDD
3	LTE FDD, NR SCS 30 kHz, BW 40 MHz, TDD
4	LTE TDD, NR SCS 15 kHz, BW 10 MHz, FDD
5	LTE TDD, NR SCS 15 kHz, BW 10 MHz, TDD
6	LTE TDD, NR SCS 30 kHz, BW 40 MHz, TDD
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.4.5.9.1.1-2: General Test Parameters for PSCell activation and deactivation

Parameter		Unit	Value	Comment
RF Channel Number			1, 2	Two radio channels are used for this test. One for E-UTRA cell and second for NR Cell
Initial Condition	Active PCell		Cell1	PCell on RF channel number 1.
	Deactivated cell		Cell2	To be activated PSCell on RF channel number 2.
Final Condition	Active PCell		Cell1	PCell on RF channel number 1.
	Deactivated cell		Cell2	PSCell deactivated on RF channel number 2.
DRX			OFF	Continuous monitoring of primary cell
Scheduling request resource priodicity			20ms	At the starting of period T3, UE sends a SR on PUCCH for PSCell
T1		s	1	During this time the PCell shall be known and cell2 shall be unknown.
T2		s	1	During this time the UE adds the PSCell.
T3		s	1	During this time the UE sends CSI reports for PSCell.
T4		s	1	During this time the UE releases the PSCell.

Table A.4.5.9.1.1-3: Cell Specific Parameters for PSCell activation and deactivation

Parameter	Unit	Config	Test			
			T1	T2	T3	T4
E-UTRA RF Channel Number		1,2,3,4,5,6	1			
NR RF Channel Number		1,2,3,4,5,6	2			
TDD		1,4	Not Applicable			

configuration		2,5	TDDConf.1.1	
		3,6	TDDConf.2.1	
$BW_{channel}$	MHz	1,4	10: $N_{RB,c}$ = 52	
		2,5	10: $N_{RB,c}$ = 52	
		3,6	40: $N_{RB,c}$ = 106	
Initial BWP Configuration		1,2,3	DLBWP.0.1 ULBWP.0.1	
Dedicated BWP Configuration		1,2,3	DLBWP.1.1 ULBWP.1.1	
PDSCH Reference measurement channel		1,4	SR.1.1 FDD	
		2,5	SR.1.1 TDD	
		3,6	SR.2.1 TDD	
RMSI CORESET Reference Channel		1,4	CR.1.1 FDD	
		2,5	CR.1.1 TDD	
		3,6	CR.2.1 TDD	
Dedicated CORESET Reference Channel		1,4	CCR.1.1 FDD	
		2,5	CCR.1.1 TDD	
		3,6	CCR.2.1 TDD	
OCNG Patterns		1,2,3,4,5,6	OP.1	
SSB configuration		1,2,4,5	SSB.1 FR1	
		3,6	SSB.2 FR1	
SMTC configuration		1,2,4,5	SMTC.1	
		3,6	SMTC.1	
TRS Configuration		1,4	TRS.1.1 FDD	
		2,5	TRS.1.1 TDD	
		3,6	TRS.1.2 TDD	
CSI-RS configuration for CSI reporting		1,4	CSI-RS.1.1 FDD	
		2,5	CSI-RS.1.1 TDD	
		3,6	CSI-RS.2.1 TDD	
reportConfigType		1,2,3,4,5,6	periodic	
reportQuantity		1,2,3,4,5,6	cri-RI-PMI-CQI	
CSI reporting periodicity	slot	1,2,4,5	5	
		3,6	10	
CSI reporting offset	slot	1,2,4,5	2	
		3,6	4	
EPRE ratio of PSS to SSS	dB	1,2,3,4,5,6	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	dBm/15 kHz	1,2,3,4,5,6	N/A	-85
N_{oc} Note2	dBm/SCS	1,2,4,5	N/A	-85
		3,6	N/A	-82
$\hat{E}_s / I_{ot}$		1,2,3,4,5,6	-infinity	0

$\hat{E}_s / N_{oc}$		1,2,3,4,5,6	-infinity	0
SS-RSRP[Note3]	dBm/SCS	1,2,4,5	-infinity	-85
		3,6	-infinity	-82
Io[Note3]	dBm/9.36MHz	1,2,4,5	N/A	-57
	dBm/38.1MHz	3,6	N/A	-51
Propagation condition		1,2,3,4,5,6	AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.4.5.9.1.2 Test Requirements

The UE performs RACH-less based PSCell activation. UE shall transmit the SR on PUCCH for PSCell at latest 65 ms[Note1] into T2.

The UE shall send at least one PUSCH on PSCell during T3.

The UE shall stop transmit PUSCH for PSCell in at latest 20 ms into T4.

All the above test requirements shall be fulfilled for the observed PSCell activation delay and PSCell deactivation delay to be counted as correct. The rate of correct observed PSCell addition delay and PSCell release delay during repeated tests shall be at least 90%.

Note1: The PSCell addition delay can be expressed as follows as specified in clause 7.38 in TS 36.133 [15]:

$T_{activation_time} = T_{RRC_delay} + T_{processing} + T_{search} + T_{\Delta} + T_{IU} + 2$ ms

Where:

T_{RRC_delay} = 20ms

$T_{processing}$ = 5 ms

T_{search} = 0 ms

T_{Δ} = 20ms

T_{IU}= max 20 ms

A.4.5.11 Conditional PSCell addition and release delay (FR1 EN-DC)

A.4.5.11.1 Addition and Release Delay of PSCell

A.4.5.11.1.1 Test purpose and environment

The purpose of this test is to verify that the NR conditional PSCell addition and release delays under EN-DC are within the requirements stated in clause 8.9A.2.

A.4.5.11.1.2 Test Parameters

Supported test configurations are shown in A.4.5.11.1.2-1. The test parameters for the E-UTRA cell are given in Table A.4.5.11.1.2-2. The E-UTRA cell once set up is not changed across time.

The test parameters for NR cell are given in Tables A.4.5.11.1.2-2 and cell-specific parameters in A.4.5.11.1.2-3 below. The test consists of four successive time periods with duration of T1, T2, T3 and T4 respectively. There are two carriers each with one cell. Before the test starts the UE is connected to Cell 1 (E-UTRA PCell) on radio channel 1 (PCC) but is not aware of Cell 2 (NR PSCell) on radio channel 2. The UE is only monitoring the PCC. During T1 only Cell1 is known to the UE.

At the start of time duration T1, the UE does not have any timing information of Cell 2. NR shall configure a condition implying addition to cell 2 during T1, at a time earlier than T_{RRC_delay} before the beginning of T2.

At the start of T2, cell 2 becomes detectable and meets the addition condition. Reception by the test system of the PRACH preamble defines the start of T3.

During T3, the UE shall send periodic CSI reports in PSCell. After having received at least one such report, the test system shall send an RRC message instructing the UE to release the PSCell. Reception by the UE of the RRC message defines the start of T4.

During T4, the UE shall release the PSCell.

Table A.4.5.11.1.2-1: Supported test configurations for FR1 PSCell

Configuration	Description
1	LTE FDD, NR SCS 15 kHz, BW 10 MHz, FDD
2	LTE FDD, NR SCS 15 kHz, BW 10 MHz, TDD
3	LTE FDD, NR SCS 30 kHz, BW 40 MHz, TDD
4	LTE TDD, NR SCS 15 kHz, BW 10 MHz, FDD
5	LTE TDD, NR SCS 15 kHz, BW 10 MHz, TDD
6	LTE TDD, NR SCS 30 kHz, BW 40 MHz, TDD
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.4.5.11.1.2-2: General Test Parameters for Conditional PSCell Addition and Release

Parameter		Unit	Value	Comment
RF Channel Number			1, 2	Two radio channels are used for this test. One for E-UTRA cell and second for NR Cell
Initial	Active PCell		Cell1	PCell on RF channel number 1.
	Neighbour cell		Cell2	Neighbour cell on RF channel number 2.
Final Condition	Active PCell		Cell1	PCell on RF channel number 1.
	Neighbour Cell		Cell2	PSCell released on RF channel number 2.
B1	Hysteresis	dB	0	Hysteresis for evaluation of event B1.
	Threshold RSRP	dBm	-93	Actual RSRP threshold for event B1. Needs to take absolute accuracy tolerance in clause 9.1.11.1 into account plus margin.
	Time to Trigger	S	0	
DRX			OFF	Continuous monitoring of primary cell
Measurement gap pattern Id			0	Gaps are configured before T2 and released before T3.
PRACH configuration on cell2			FR1 PRACH configuration 1	Captured in A.3.8.2.1
Cell-individual offset for cells on RF channel number 1		dB	0	Individual offset for cells on primary component carrier.

Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on carrier frequency of cell2.
T1	s	5	During this time the PCell is known and Cell 2 is unknown.
T2	s	≤7	During this time Cell 2 meets the addition condition and UE adds this PSCell.
T3	s	1	During this time the UE sends CSI reports for Cell 2. And the test system shall send an RRC message instructing the UE to release the PSCell.
T4	s	1	During this time the UE releases the Cell 2.

Table A.4.5.11.1.2-3: Cell Specific Parameters for Conditional PSCell Addition and Release

Parameter	Unit	Config	Test			
			T1	T2	T3	T4
E-UTRA RF Channel Number		1,2,3,4,5,6	1			
NR RF Channel Number		1,2,3,4,5,6	2			
TDD configuration		1,4	Not Applicable			
		2,5	TDDConf.1.1			
		3,6	TDDConf.2.1			
$BW_{channel}$	MHz	1,4	10: $N_{RB,c}$ = 52			
		2,5	10: $N_{RB,c}$ = 52			
		3,6	40: $N_{RB,c}$ = 106			
Initial BWP Configuration		1,2,3	DLBWP.0.1 ULBWP.0.1			
Dedicated BWP Configuration		1,2,3	DLBWP.1.1 ULBWP.1.1			
PDSCH Reference measurement channel		1,4	SR.1.1 FDD			
		2,5	SR.1.1 TDD			
		3,6	SR.2.1 TDD			
RMSI CORESET Reference Channel		1,4	CR.1.1 FDD			
		2,5	CR.1.1 TDD			
		3,6	CR.2.1 TDD			
Dedicated CORESET Reference Channel		1,4	CCR.1.1 FDD			
		2,5	CCR.1.1 TDD			
		3,6	CCR.2.1 TDD			
OCNG Patterns		1,2,3,4,5,6	OP.1			
SSB configuration		1,2,4,5	SSB.1 FR1			
		3,6	SSB.2 FR1			
SMTC configuration		1,2,4,5	SMTC.1			
		3,6	SMTC.1			
TRS Configuration		1,4	TRS.1.1 FDD			
		2,5	TRS.1.1 TDD			
		3,6	TRS.1.2 TDD			
CSI-RS configuration for CSI reporting		1,4	CSI-RS.1.1 FDD			
		2,5	CSI-RS.1.1 TDD			
		3,6	CSI-RS.2.1 TDD			
reportConfigType		1,2,3,4,5,6	periodic			
reportQuantity		1,2,3,4,5,6	cri-RI-PMI-CQI			
CSI reporting periodicity	slot	1,2,4,5	5			
		3,6	10			
CSI reporting offset	slot	1,2,4,5	2			
		3,6	4			
EPRE ratio of PSS to SSS						
EPRE ratio of PBCH DMRS to SSS						

EPRE ratio of PBCH to PBCH DMRS EPRE ratio of PDCCH DMRS to SSS EPRE ratio of PDCCH to PDCCH DMRS EPRE ratio of PDSCH DMRS to SSS EPRE ratio of PDSCH to PDSCH EPRE ratio of OCNG DMRS to SSS(Note 1) EPRE ratio of OCNG to OCNG DMRS (Note 1)	dB	1,2,3,4,5,6	0	
N_{oc} Note2	dBm/15 kHz	1,2,3,4,5,6	N/A	-85
N_{oc} Note2	dBm/SCS	1,2,4,5	N/A	-85
		3,6	N/A	-82
$\hat{E}_s/I_{ot}$		1,2,3,4,5,6	-infinity	0
$\hat{E}_s/N_{oc}$		1,2,3,4,5,6	-infinity	0
SS-RSRP Note3	dBm/SCS	1,2,4,5	-infinity	-85
		3,6	-infinity	-82
Io Note3	dBm/9.36MHz	1,2,4,5	N/A	-57
	dBm/38.1MHz	3,6	N/A	-51
Propagation condition		1,2,3,4,5,6	AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.4.5.11.1.3 Test Requirements

T_{RRC_delay} + T_{Event_DU} occurs during T1 as the addition condition becomes satisfied at the start of T2. The test shall verify that there are no interruptions during T1.

The UE shall start to transmit the PRACH to Cell 2 less than $T_{measure}$ + $T_{UE_preparation}$ + $T_{processing}$ + T_{Δ} + T_{PSCell_DU} + 2 ms = 1040+10+62ms=1112 ms from the start of T2.

The UE shall transmit at least one periodic CSI report for PSCell during T3.

The UE shall stop transmitting CSI reports for PSCell at latest 20 ms into T4.

All of the above test requirements shall be fulfilled in order for the observed conditional PSCell addition and release delay to be counted as correct. The rate of correct events observed during repeated tests shall be at least 90%.

A.4.6 Measurement procedure

A.4.6.1 Intra-frequency Measurements

A.4.6.1.1 EN-DC event triggered reporting tests without gap under non-DRX

A.4.6.1.1.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2.

A.4.6.1.1.2 Test parameters

Three cells are deployed in the test, which are E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and a FR1 neighbour cell (Cell 3) on the same frequency as the PSCell. The test parameters for PSCell are given in Table A.4.6.1.1.2-1, A.4.6.1.1.2-2, A.4.6.1.1.2-3 below and the test parameters and applicability for the E-UTRAN cell are defined in A.3.7.2. In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 3.

Table A.4.6.1.1.2-1: Supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: Target NR Cell 3 has the same SCS, BW and duplex mode as NR serving Cell 2	

Table A.4.6.1.1.2-2: General test parameters for EN-DC intra-frequency event triggered reporting without gap for PSCell in FR1

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3, 4, 5, 6	E-UTRAN Cell 1 and NR Cell 2	
Neighbour cell		1, 2, 3, 4, 5, 6	NR Cell 3	Cell to be identified.
RF Channel Number		1, 2, 3, 4, 5, 6	1: Cell 1 2: Cell 2 and Cell 3	
SSB configuration		1, 4	SSB.1 FR1	
		2, 5	SSB.1 FR1	
		3, 6	SSB.2 FR1	
SMTC configuration		1, 4	SMTC.2	
		2, 5	SMTC.1	
		3, 6	SMTC.1	
A3-Offset	dB	1, 2, 3, 4, 5, 6	-4.5	
CP length		1, 2, 3, 4, 5, 6	Normal	
Hysteresis	dB	1, 2, 3, 4, 5, 6	0	
Time To Trigger	s	1, 2, 3, 4, 5, 6	0	
Filter coefficient		1, 2, 3, 4, 5, 6	0	L3 filtering is not used
DRX		1, 2, 3, 4, 5, 6	N/A	OFF
Time offset between PCell and PSCell		1, 2, 3, 4, 5, 6	3 μs	Synchronous EN-DC

Time offset between serving and neighbour cells		1, 4	3 ms	Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		2, 5	3 μs	Synchronous cells
		3, 6	3 μs	Synchronous cells
T1	s	1, 2, 3, 4, 5, 6	5	
T2	s	1, 2, 3, 4, 5, 6	5	

Table A.4.6.1.1.2-3: NR Cell specific test parameters for EN-DC intra-frequency event triggered reporting without gap for PSCell in FR1

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
TDD configuration		1, 4	N/A		N/A	
		2, 5	TDDConf.1.1		TDDConf.1.1	
		3, 6	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD		N/A	
		2, 5	SR.1.1 TDD			
		3, 6	SR.2.1 TDD			
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD		N/A	
		2, 5	CR.1.1 TDD		N/A	
		3, 6	CR.2.1 TDD		N/A	
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD		N/A	
		2, 5	CCR.1.1 TDD		N/A	
		3, 6	CCR.2.1 TDD		N/A	
OCNG Patterns		1, 2, 3, 4, 5, 6	OP.1		OP.1	
TRS configuration		1, 4	TRS.1.1 FDD		N/A	
		2, 5	TRS.1.1 TDD		N/A	
		3, 6	TRS.1.2 TDD		N/A	
Initial BWP configuration		1, 2, 3, 4, 5, 6	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3, 4, 5, 6	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3, 4, 5, 6	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2, 3, 4, 5, 6	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1, 4	-98			
		2, 5	-98			
		3, 6	-95			
N_{oc} Note 2	dBm/15 kHz	1, 4	-98			
		2, 5				
		3, 6				
$\hat{E}_s/I_{ot}$	dB	1, 4	4	-1.46	-Infinity	-1.46
		2, 5				
		3, 6				
$\hat{E}_s/N_{oc}$	dB	1, 4	4	4	-Infinity	4
		2, 5				
		3, 6				
SS-RSRP Note 3	dBm/SCS kHz	1, 4	-94	-94	-Infinity	-94
		2, 5	-94	-94	-Infinity	-94
		3, 6	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1, 4	-64.60	-62.25	-64.60	-62.25
	dBm/9.36 MHz	2, 5	-64.60	-62.25	-64.60	-62.25

	dBm/38.16 MHz	3, 6	-58.50	-56.16	-58.50	-56.16
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN			
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.4.6.1.1.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 800 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.1.2 EN-DC event triggered reporting tests without gap under DRX

A.4.6.1.2.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2.

A.4.6.1.2.2 Test parameters

Three cells are deployed in the test, which are E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and a FR1 neighbour cell (Cell 3) on the same frequency as the PSCell. The test parameters for PSCell are given in Table A.4.6.1.2.1-1, A.4.6.1.2.1-2, A.4.6.1.2.1-3 and A.4.6.1.2.1-4 below and the test parameters and applicability for the E-UTRAN cell are defined in A.3.7.2. In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 3.

UE needs to be provided 500ms with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furhtermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.4.6.1.2.2-1: Supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: Target NR Cell 3 has the same SCS, BW and duplex mode as NR serving Cell 2	

Table A.4.6.1.2.2-2: General test parameters for EN-DC intra-frequency event triggered reporting without gap for PSCell in FR1 with DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
Active cell		1, 2, 3, 4, 5, 6	E-UTRAN Cell 1 and NR Cell 2		
Neighbour cell		1, 2, 3, 4, 5, 6	NR Cell 3		Cell to be identified.
RF Channel Number		1, 2, 3, 4, 5, 6	1: Cell 1 2: Cell 2 and Cell 3		
SSB configuration		1, 4	SSB.1 FR1		
		2, 5	SSB.1 FR1		
		3, 6	SSB.2 FR1		
SMTC configuration		1, 4	SMTC.2		
		2, 5	SMTC.1		
		3, 6	SMTC.1		
A3-Offset	dB	1, 2, 3, 4, 5, 6	-4.5		
CP length		1, 2, 3, 4, 5, 6	Normal		
Hysteresis	dB	1, 2, 3, 4, 5, 6	0		
Time To Trigger	s	1, 2, 3, 4, 5, 6	0		
Filter coefficient		1, 2, 3, 4, 5, 6	0		L3 filtering is not used
DRX		1, 2, 3, 4, 5, 6	DRX.1	DRX. 7	
Time offset between PCell and PSCell		1, 2, 3, 4, 5, 6	3 μs		Synchronous EN-DC
Time offset between serving and neighbour cells		1, 4	3 ms		Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		2, 5	3 μs		Synchronous cells
		3, 6	3 μs		Synchronous cells
T1	s	1, 2, 3, 4, 5, 6	5		
T2	s	1, 2, 3, 4, 5, 6	5	10	

Table A.4.6.1.2.2-3: NR Cell specific test parameters for EN-DC intra-frequency event triggered reporting without gap for PSCell in FR1 with DRX

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
TDD configuration		1, 4	N/A		N/A	
		2, 5	TDDConf.1.1		TDDConf.1.1	
		3, 6	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD		N/A	
		2, 5	SR.1.1 TDD			
		3, 6	SR.2.1 TDD			
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD		N/A	
		2, 5	CR.1.1 TDD		N/A	
		3, 6	CR.2.1 TDD		N/A	

Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD		N/A	
		2, 5	CCR.1.1 TDD		N/A	
		3, 6	CCR.2.1 TDD		N/A	
OCNG Patterns		1, 2, 3, 4, 5, 6	OP.1		OP.1	
TRS configuration		1, 4	TRS.1.1 FDD		N/A	
		2, 5	TRS.1.1 TDD		N/A	
		3, 6	TRS.1.2 TDD		N/A	
Initial BWP configuration		1, 2, 3, 4, 5, 6	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3, 4, 5, 6	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3, 4, 5, 6	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2, 3, 4, 5, 6	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1, 4	-98			
		2, 5	-98			
		3, 6	-95			
N_{oc} Note 2	dBm/15 kHz	1, 4	-98			
		2, 5				
		3, 6				
$\hat{E}_s/I_{ot}$	dB	1, 4	4	-1.46	-Infinity	-1.46
		2, 5				
		3, 6				
$\hat{E}_s/N_{oc}$	dB	1, 4	4	4	-Infinity	4
		2, 5				
		3, 6				
SS-RSRP Note 3	dBm/SCS kHz	1, 4	-94	-94	-Infinity	-94
		2, 5	-94	-94	-Infinity	-94
		3, 6	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1, 4	-64.60	-62.25	-64.60	-62.25
	dBm/9.36 MHz	2, 5	-64.60	-62.25	-64.60	-62.25
	dBm/38.16 MHz	3	-58.50	-56.16	-58.50	-56.16
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.4.6.1.2.2 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 6400 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.1.3 EN-DC event triggered reporting tests with per-UE gaps under non-DRX

A.4.6.1.3.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2.6.2 and 9.2.6.3.

A.4.6.1.3.2 Test parameters

Three cells are deployed in the test, which are E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and a FR1 neighbour cell (Cell 3) on the same frequency as the PSCell.The test parameters for PSCell are given in Table A.4.6.1.3.1-1 and A.4.6.1.3.1-2 below and the test parameters and applicability for the E-UTRAN cell are defined in A.3.7.2. In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 3.

There are two BWPs configured in Cell 2, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 2. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

Table A.4.6.1.3.2-1: Supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: Target NR Cell 3 has the same SCS, BW and duplex mode as NR serving Cell 2	

Table A.4.6.1.3.2-2: General test parameters for EN-DC intra-frequency event triggered reporting with per-UE gaps for PSCell in FR1

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3, 4, 5, 6	E-UTRAN Cell 1 and NR Cell 2	
Neighbour cell		1, 2, 3, 4, 5, 6	NR Cell 3	Cell to be identified.
RF Channel Number		1, 2, 3, 4, 5, 6	1: Cell 1 2: Cell 2 and Cell 3	
Measurement gap type		1, 2, 3, 4, 5, 6	Per-UE gaps	
Measurement gap repitition periodicity	ms	1, 2, 3, 4, 5, 6	40	
Measurement gap length	ms	1, 2, 3, 4, 5, 6	6	
Measurement gap offset	ms	1, 2, 3, 4, 5, 6	39	

SSB configuration		1, 4	SSB.1 FR1	
		2, 5	SSB.1 FR1	
		3, 6	SSB.2 FR1	
SMTC configuration		1, 4	SMTC.2	
		2, 5	SMTC.1	
		3, 6	SMTC.1	
CSI-RS parameters		1, 4	CSI-RS.1.2 FDD resource #0	
		2, 5	CSI-RS.1.2 TDD resource #0	
		3, 6	CSI-RS.2.2 TDD resource #0	
A3-Offset	dB	1, 2, 3, 4, 5, 6	-4.5	
CP length		1, 2, 3, 4, 5, 6	Normal	
Hysteresis	dB	1, 2, 3, 4, 5, 6	0	
Time To Trigger	s	1, 2, 3, 4, 5, 6	0	
Filter coefficient		1, 2, 3, 4, 5, 6	0	L3 filtering is not used
DRX		1, 2, 3, 4, 5, 6	N/A	OFF
Time offset between PCell and PSCell		1, 2, 3, 4, 5, 6	3 μs	Synchronous EN-DC
Time offset between serving and neighbour cells		1, 4	3 ms	Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		2, 5	3 μs	Synchronous cells
		3, 6	3 μs	Synchronous cells
T1	s	1, 2, 3, 4, 5, 6	5	
T2	s	1, 2, 3, 4, 5, 6	5	

Table A.4.6.1.3.2-3: NR Cell specific test parameters for EN-DC intra-frequency event triggered reporting with per-UE gaps for PSCell in FR1

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
TDD configuration		1, 4	N/A		N/A	
		2, 5	TDDConf.1.1		TDDConf.1.1	
		3, 6	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD		N/A	
		2, 5	SR.1.1 TDD			
		3, 6	SR.2.1 TDD			
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD		N/A	
		2, 5	CR.1.1 TDD		N/A	
		3, 6	CR.2.1 TDD		N/A	
Dedicated CORESET RMC configuration		1, 4	CCR.1.2 FDD		N/A	
		2, 5	CCR.1.2 TDD		N/A	
		3, 6	CCR.2.1 TDD		N/A	
OCNG Patterns		1, 2, 3, 4, 5, 6	OP.1		OP.1	
TRS configuration		1, 4	TRS.1.1 FDD		N/A	
		2, 5	TRS.1.1 TDD		N/A	
		3, 6	TRS.1.2 TDD		N/A	

Initial BWP configuration		1, 2, 3, 4, 5, 6	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3, 4, 5, 6	DLBWP.1.2		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3, 4, 5, 6	ULBWP.1.2		ULBWP.1.1	
RLM-RS		1, 2, 3, 4, 5, 6	CSI-RS		SSB	
N_{oc} Note 2	dBm/SCS	1, 4	-98			
		2, 5	-98			
		3, 6	-95			
N_{oc} Note 2	dBm/15 kHz	1, 4	-98			
		2, 5				
		3, 6				
$\hat{E}_s/I_{ot}$	dB	1, 4	4	-1.46	-Infinity	-1.46
		2, 5				
		3, 6				
$\hat{E}_s/N_{oc}$	dB	1, 4	4	4	-Infinity	4
		2, 5				
		3, 6				
SS-RSRP Note 3	dBm/SCS kHz	1, 4	-94	-94	-Infinity	-94
		2, 5	-94	-94	-Infinity	-94
		3, 6	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1, 4	-64.60	-62.25	-64.60	-62.25
	dBm/9.36 MHz	2, 5	-64.60	-62.25	-64.60	-62.25
	dBm/38.16 MHz	3, 6	-58.50	-56.16	-58.50	-56.16
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.4.6.1.3.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 800 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.1.4 EN-DC event triggered reporting tests with per-UE gaps under DRX

A.4.6.1.4.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clause 9.2.6.2 and 9.2.6.3.

A.4.6.1.4.2 Test parameters

Three cells are deployed in the test, which are E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and a FR1 neighbour cell (Cell 3) on the same frequency as the PSCell. The test parameters for PSCell are given in Table A.4.6.1.4.2-1, A.4.6.1.4.2-2, A.4.6.1.4.2-3 A.4.6.1.4.2-4 and A.4.6.1.4.2-5 below and the test parameters and applicability for the E-UTRAN cell are defined in A.3.7.2. In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 3.

There are two BWPs configured in Cell 2, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 2. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

UE needs to be provided with new Timing Advance Command MAC control at least once during each time alignment timer period to maintain uplink time alignment. Furhtermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.4.6.1.4.2-1: Supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: Target NR Cell 3 has the same SCS, BW and duplex mode as NR serving Cell 2	

Table A.4.6.1.4.2-2: General test parameters for EN-DC intra-frequency event triggered reporting with per-UE gaps for PSCell in FR1 with DRX

Parameter	Unit	Test	Value		Comment
		configuration	Test 1	Test 2	
Active cell		1, 2, 3, 4, 5, 6	E-UTRAN Cell 1 and NR Cell 2		
Neighbour cell		1, 2, 3, 4, 5, 6	NR Cell 3		Cell to be identified.
RF Channel Number		1, 2, 3, 4, 5, 6	1: Cell 1 2: Cell 2 and Cell 3		
Measurement gap type		1, 2, 3, 4, 5, 6	Per-UE gaps		
Measurement gap repitition periodicity	ms	1, 2, 3, 4, 5, 6	40		
Measurement gap length	ms	1, 2, 3, 4, 5, 6	6		
Measurement gap offset	ms	1, 2, 3, 4, 5, 6	39		
SSB configuration		1, 4	SSB.1 FR1		
		2, 5	SSB.1 FR1		
		3, 6	SSB.2 FR1		
SMTC configuration		1, 4	SMTC.2		
		2, 5	SMTC.1		
		3, 6	SMTC.1		

CSI-RS parameters		1, 4	CSI-RS.1.2 FDD resource #0		
		2, 5	CSI-RS.1.2 TDD resource #0		
		3, 6	CSI-RS.2.2 TDD resource #0		
A3-Offset	dB	1, 2, 3, 4, 5, 6	-4.5		
CP length		1, 2, 3, 4, 5, 6	Normal		
Hysteresis	dB	1, 2, 3, 4, 5, 6	0		
Time To Trigger	s	1, 2, 3, 4, 5, 6	0		
Filter coefficient		1, 2, 3, 4, 5, 6	0		L3 filtering is not used
DRX		1, 2, 3, 4, 5, 6	DRX.1	DRX. 7	
Time offset between PCell and PSCell		1, 2, 3, 4, 5, 6	3 μs		Synchronous EN-DC
Time offset between serving and neighbour cells		1, 4	3 ms		Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		2, 5	3 μs		Synchronous cells
		3, 6	3 μs		Synchronous cells
T1	s	1, 2, 3, 4, 5, 6	5		
T2	s	1, 2, 3, 4, 5, 6	5	10	

Table A.4.6.1.4.2-3: NR Cell specific test parameters for EN-DC intra-frequency event triggered reporting with per-UE gaps for PSCell in FR1 with DRX

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
TDD configuration		1, 4	N/A		N/A	
		2, 5	TDDConf.1.1		TDDConf.1.1	
		3, 6	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD		N/A	
		2, 5	SR.1.1 TDD			
		3, 6	SR.2.1 TDD			
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD		N/A	
		2, 5	CR.1.1 TDD		N/A	
		3, 6	CR.2.1 TDD		N/A	
Dedicated CORESET RMC configuration		1, 4	CCR.1.2 FDD		N/A	
		2, 5	CCR.1.2 TDD		N/A	
		3, 6	CCR.2.1 TDD		N/A	
OCNG Patterns		1, 2, 3, 4, 5, 6	OP.1		OP.1	
TRS configuration		1, 4	TRS.1.1 FDD		N/A	
		2, 5	TRS.1.1 TDD		N/A	
		3, 6	TRS.1.2 TDD		N/A	
Initial BWP configuration		1, 2, 3, 4, 5, 6	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3, 4, 5, 6	DLBWP.1.2		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3, 4, 5, 6	ULBWP.1.2		ULBWP.1.1	
RLM-RS		1, 2, 3, 4, 5, 6	CSI-RS		SSB	

N_{oc} Note 2	dBm/SCS	1, 4	-98			
		2, 5	-98			
		3, 6	-95			
N_{oc} Note 2	dBm/15 KHz	1, 4	-98			
		2, 5				
		3, 6				
$\hat{E}_s/I_{ot}$	dB	1, 4	4	-1.46	-Infinity	-1.46
		2, 5				
		3, 6				
$\hat{E}_s/N_{oc}$	dB	1, 4	4	4	-Infinity	4
		2, 5				
		3, 6				
SS-RSRP Note 3	dBm/SCS KHz	1, 4	-94	-94	-Infinity	-94
		2, 5	-94	-94	-Infinity	-94
		3, 6	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1, 4	-64.60	-62.25	-64.60	-62.25
	dBm/9.36 MHz	2, 5	-64.60	-62.25	-64.60	-62.25
	dBm/38.16 MHz	3, 6	-58.50	-56.16	-58.50	-56.16
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.4.6.1.4.3 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 6400 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.1.5 EN-DC event triggered reporting tests without gap under non-DRX with SSB index reading

A.4.6.1.5.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the FDD intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2.

A.4.6.1.5.2 Test parameters

Three cells are deployed in the test, which are E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and a FR1 neighbour cell (Cell 3) on the same frequency as the PSCell.The test parameters for FDD PSCell are given in Table A.4.6.1.5.1-1 and A.4.6.1.5.1-2 below and the test parameters and applicability for the E-UTRAN cell are defined in A.3.7.2. In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 3.

Table A.4.6.1.5.2-1: Supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: Target NR Cell 3 has the same SCS, BW and duplex mode as NR serving Cell 2	

Table A.4.6.1.5.2-2: General test parameters for EN-DC intra-frequency event triggered reporting without gap for FDD PSCell in FR1 with SSB index reading

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2	E-UTRAN Cell 1 and NR Cell 2	
Neighbour cell		1, 2	NR Cell 3	Cell to be identified.
RF Channel Number		1, 2	1: Cell 1 2: Cell 2 and Cell 3	
SSB configuration		1, 2	SSB.1 FR1	
SMTC configuration		1, 2	SMTC.2	
A3-Offset	dB	1, 2	-4.5	
CP length		1, 2	Normal	
Hysteresis	dB	1, 2	0	
Time To Trigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX		1, 2	N/A	OFF
Time offset between PCell and PSCell		1, 2	3 μs	Synchronous EN-DC
Time offset between serving and neighbour cells		1, 2	3 ms	Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
T1	s	1, 2	5	
T2	s	1, 2	5	

Table A.4.6.1.5.1-3: NR Cell specific test parameters for EN-DC intra-frequency event triggered reporting without gap for FDD PSCell in FR1 with SSB index reading

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
TDD configuration		1, 2	N/A		N/A	
PDSCH RMC configuration		1, 2	SR.1.1 FDD		N/A	

RMSI CORESET RMC configuration		1, 2	CR.1.1 FDD		N/A	
Dedicated CORESET RMC configuration		1, 2	CCR.1.1 FDD		N/A	
OCNG Patterns		1, 2	OP.1		OP.1	
TRS configuration		1, 2	TRS.1.1 FDD		N/A	
Initial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1, 2	-98			
N_{oc} Note 2	dBm/15 kHz	1, 2	-98			
$\hat{E}_s/I_{ot}$	dB	1, 2	4	-1.46	-Infinity	-1.46
$\hat{E}_s/N_{oc}$	dB	1, 2	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS kHz	1, 2	-94	-94	-Infinity	-94
Io	dBm/9.36 MHz	1, 2	-64.60	-62.25	-64.60	-62.25
Propagation Condition		1, 2	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.4.6.1.5.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE is required to read the neighbour cell SSB index and report the acquired SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.1.6 EN-DC event triggered reporting tests with SSB index reading with per-UE gaps

A.4.6.1.6.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clause 9.2.6.2 and 9.2.6.3.

A.4.6.1.6.2 Test parameters

Three cells are deployed in the test, which are E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and a FR1 neighbour cell (Cell 3) on the same frequency as the PSCell. The test parameters for PSCell are given in Table A.4.6.1.6.2-1 A.4.6.1.6.2-2 and A.4.6.1.6.2-3 below and the test parameters and applicability for the E-UTRAN cell are defined in A.3.7.2. In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 3.

There are two BWPs configured in Cell 2, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 2. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

Table A.4.6.1.6.2-1: Supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: Target NR Cell 3 has the same SCS, BW and duplex mode as NR serving Cell 2	

Table A.4.6.1.6.2-2: General test parameters for EN-DC intra-frequency event triggered reporting with gap for PSCell in FR1 with SSB index reading

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2	E-UTRAN Cell 1 and NR Cell 2	
Neighbour cell		1, 2	NR Cell 3	Cell to be identified.
RF Channel Number		1, 2	1: Cell 1 2: Cell 2 and Cell 3	
Measurement gap type		1, 2	Per-UE gaps	
Measurement gap repitition periodicity	ms	1, 2	40	
Measurement gap length	ms	1, 2	6	
Measurement gap offset	ms	1, 2	39	
SSB configuration		1, 2	SSB.1 FR1	
SMTC configuration		1, 2	SMTC.2	
CSI-RS parameters		1, 2	CSI-RS.1.2 FDD resource #0	
A3-Offset	dB	1, 2	-4.5	
CP length		1, 2	Normal	
Hysteresis	dB	1, 2	0	
Time To Trigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX		1, 2	N/A	OFF
Time offset between PCell and PSCell		1, 2	3 μs	Synchronous EN-DC
Time offset between serving and neighbour cells		1, 2	3 ms	Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
T1	s	1, 2	5	
T2	s	1, 2	5	

Table A.4.6.1.6.2-3: NR Cell specific test parameters for EN-DC intra-frequency event triggered reporting with gap for PSCell in FR1 with SSB index reading

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
TDD configuration		1, 2	N/A		N/A	
PDSCH RMC configuration		1, 2	SR.1.1 FDD		N/A	
RMSI CORESET RMC configuration		1, 2	CR.1.1 FDD		N/A	
Dedicated CORESET RMC configuration		1, 2	CCR.1.2 FDD		N/A	
OCNG Patterns		1, 2	OP.1		OP.1	
TRS configuration		1, 2	TRS.1.1 FDD		N/A	
Initial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2	DLBWP.1.2		DLBWP.1.1	
Active UL BWP configuration		1, 2	ULBWP.1.2		ULBWP.1.1	
RLM-RS		1, 2	CSI-RS		SSB	
N_{oc} Note 2	dBm/SCS	1, 2	-98			
N_{oc} Note 2	dBm/15 kHz	1, 2	-98			
$\hat{E}_s/I_{ot}$	dB	1, 2	4	-1.46	-Infinity	-1.46
$\hat{E}_s/N_{oc}$	dB	1, 2	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS kHz	1, 2	-94	-94	-Infinity	-94
Io	dBm/9.36 MHz	1, 2	-64.60	-62.25	-64.60	-62.25
Propagation Condition		1, 2	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.4.6.1.6.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE is required to read the neighbour cell SSB index and report the acquired SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.1.7 EN-DC event triggered reporting tests under DRX for UE configured with highSpeedMeasFlag-r16

A.4.6.1.7.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event for UE configured with highSpeedMeasFlag-r16. This test will partly verify the intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2.

A.4.6.1.7.2 Test parameters

Three cells are deployed in the test, which are E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and a FR1 neighbour cell (Cell 3) on the same frequency as the PSCell. The test parameters for PSCell are given in Table A.4.6.1.7.1-1, A.4.6.1.7.1-2, A.4.6.1.7.1-3 and A.4.6.1.7.1-4 below and the test parameters and applicability for the E-UTRAN cell are defined in A.3.7.2. In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 3.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furhtermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.4.6.1.7.2-1: Supported test configurations

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations. Note 2: Target NR Cell 3 has the same SCS, BW and duplex mode as NR serving Cell 2	

Table A.4.6.1.7.2-2: General test parameters for EN-DC intra-frequency event triggered reporting without gap for PSCell in FR1 with DRX for UE configured with highSpeedMeasFlag-r16

Parameter	Unit	Test configuration	Value	Comment
highSpeedMeasFlag-r16		1,2,3,4,5,6	Present	To enable high speed measurement enhancements
Active cell		1, 2, 3,4,5,6	E-UTRAN Cell 1 and NR Cell 2	
Neighbour cell		1, 2, 3,4,5,6	NR Cell 3	Cell to be identified.
RF Channel Number		1, 2, 3,4,5,6	1: Cell 1 2: Cell 2 and Cell 3	
SSB configuration		1,4	SSB.1 FR1	
		2,5	SSB.1 FR1	
		3,6	SSB.2 FR1	
SMTC configuration		1,4	SMTC.2	
		2,5	SMTC.1	
		3,6	SMTC.1	
A3-Offset	dB	1, 2, 3,4,5,6	-4.5	

CP length		1, 2, 3,4,5,6	Normal	
Hysteresis	dB	1, 2, 3,4,5,6	0	
Time To Trigger	s	1, 2, 3,4,5,6	0	
Filter coefficient		1, 2, 3,4,5,6	0	L3 filtering is not used
DRX		1, 2, 3,4,5,6	DRX. 7.	640ms DRX cycle
Time offset between PCell and PSCell		1, 2, 3,4,5,6	3 µs	Synchronous EN-DC
Time offset between serving and neighbour cells		1,4	3 ms	Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		2,5	3 µs	Synchronous cells
		3,6	3 µs	Synchronous cells
T1	s	1, 2, 3,4,5,6	5	
T2	s	1, 2, 3,4,5,6	6	

Table A.4.6.1.7.2-3: NR Cell specific test parameters for EN-DC intra-frequency event triggered reporting without gap for PSCell in FR1 with DRX for UE configured with highSpeedMeasFlag-r16

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
TDD configuration		1,4	N/A		N/A	
		2,5	TDDConf.1.1		TDDConf.1.1	
		3,6	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1,4	SR.1.1 FDD		N/A	
		2,5	SR.1.1 TDD			
		3,6	SR.2.1 TDD			
RMSI CORESET RMC configuration		1,4	CR.1.1 FDD		CR.1.1 FDD	
		2,5	CR.1.1 TDD		CR.1.1 TDD	
		3,6	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1,4	CCR.1.1 FDD		CCR.1.1 FDD	
		2,5	CCR.1.1 TDD		CCR.1.1 TDD	
		3,6	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns		1, 2, 3,4,5,6	OP.1		OP.1	
TRS configuration		1,4	TRS.1.1 FDD		N/A	
		2,5	TRS.1.1 TDD		N/A	
		3,6	TRS.1.2 TDD		N/A	
Initial BWP configuration		1, 2, 3,4,5,6	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3,4,5,6	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3,4,5,6	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2, 3,4,5,6	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1,4	-98			
		2,5	-98			
		3,6	-95			

N_{oc} Note 2	dBm/15 kHz	1,4	-98			
		2,5				
		3,6				
$\hat{E}_s/I_{ot}$	dB	1,4	4	-1.46	-Infinity	-1.46
		2,5				
		3,6				
$\hat{E}_s/N_{oc}$	dB	1,4	4	4	-Infinity	4
		2,5				
		3,6				
SS-RSRP Note 3	dBm/SCS kHz	1,4	-94	-94	-Infinity	-94
		2,5	-94	-94	-Infinity	-94
		3,6	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1,4	-64.60	-62.25	-64.60	-62.25
	dBm/9.36 MHz	2,5	-64.60	-62.25	-64.60	-62.25
	dBm/38.16 MHz	3,6	-58.50	-56.16	-58.50	-56.16
Propagation Condition		1, 2,4,5	AWGN		AWGN 1944 Hz Note 4	
		3,6	AWGN		AWGN 3334 Hz Note 5	

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: The AWGN 1944 Hz condition is a non fading propagation channel with one tap. Doppler shift is a constant 1944Hz.

Note 5: The AWGN 3334 Hz condition is a non fading propagation channel with one tap. Doppler shift is a constant 3334Hz.

A.4.6.1.7.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 5120 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.1.8 EN-DC event triggered reporting tests for FR1 cell without SSB time index detection when DRX is used for UE configured with *highSpeedMeasCA-Scell-r17*

A.4.6.1.8.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC intra-frequency NR measurement requirements in clause 9.2.5.

In this test, there are four cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 on NR RF channel 1, NR cell 3 as deactivated SCell in FR1 on NR RF channel 2, and NR cell 4 as neighbour cell on the same frequency as cell 3. The test parameters and configurations are given in Tables A.4.6.1.8.1-1, A.4.6.1.8.1-2, and A.4.6.1.8.1-3.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A6 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.1-1. Supported test configurations are shown in table A.4.6.1.8.1-1.

Table A.4.6.1.8.1-1: EN-DC event triggered reporting tests for FR1 cell without SSB time index detection when DRX is used for UE configured with *highSpeedMeasCA-Scell-r17*

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: NR cell3 has the same SCS, BW and duplex mode as NR cell2	

Table A.4.6.1.8.1-2: General test parameters for EN-DC event triggered reporting tests for FR1 cell without SSB time index detection when DRX is used for UE configured with *highSpeedMeasCA-Scell-r17*

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
highSpeedMeasCA-Scell-r17		Config 1,2,3,4,5,6	Present		To enable high speed measurement enhancements
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1		One E-UTRAN carrier frequencies is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1, 2		Two FR1 NR carrier frequencies are used.
Active cell		Config 1,2,3,4,5,6	LTE Cell 1 (PCell) and NR cell 2 (PScell)		LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.
Deactivated Scell		Config 1,2,3,4,5,6	NR cell 3		NR cell 3 is on NR RF channel number 2.
Neighbour cell		Config 1,2,3,4,5,6	NR cell 4		NR cell 4 is on NR RF channel number 2.
A6-Offset	dB	Config 1,2,3,4,5,6	-4.5		
Hysteresis	dB	Config 1,2,3,4,5,6	0		
CP length		Config 1,2,3,4,5,6	Normal		
Measurement gap pattern Id			OFF		
SCell measurement cycle (measCycleSCell)		Config 1,2,3,4,5,6	160 ms		
TimeToTrigger	s	Config 1,2,3,4,5,6	0		

Filter coefficient		Config 1,2,3,4,5,6	0	As specified in clause A.3.3
DRX		Config 1,2,3,4,5,6	DRX.4	
Time offset between PCell and PSCell		Config 1,2,3,4,5,6	3 μs	Synchronous EN-DC
Time alignment error between cell2 and cell3	μs	≤ Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.	Time alignment error between cell2 and cell3
Time offset between serving l and neighbour cells		Config 1,4	3 ms	Asynchronous cells. The timing of Cell 4 is 3ms later than the timing of Cell 3.
		Config 2,3,5,6	3 μs	Synchronous cells.
T1	s	Config 1,2,3,4,5,6	5	
T2	s	Config 1,2,3,4,5,6	1	

Table A.4.6.1.8.1-3: Cell specific test parameters for EN-DC event triggered reporting tests for FR1 cell without SSB time index detection when DRX is used for UE configured with *highSpeedMeasCA-Scell-r17*

Parameter	Unit	Test configuration	Cell 2		Cell 3		Cell 4	
			T1	T2	T1	T2	T1	T2
NR RF Channel Number		Config 1,2,3,4,5,6	1		2		2	
Duplex mode		Config 1,4	FDD				FDD	
		Config 2,3,5,6	TDD				TDD	
$BW_{channel}$	MHz	Config 1,4	10: $N_{RB,c}$ = 52				10: $N_{RB,c}$ = 52	
		Config 2,5	10: $N_{RB,c}$ = 52				10: $N_{RB,c}$ = 52	
		Config 3,6	40: $N_{RB,c}$ = 106				40: $N_{RB,c}$ = 106	
BWP BW	MHz	Config 1,4	10: $N_{RB,c}$ = 52				10: $N_{RB,c}$ = 52	
		Config 2,5	10: $N_{RB,c}$ = 52				10: $N_{RB,c}$ = 52	
		Config 3,6	40: $N_{RB,c}$ = 106				40: $N_{RB,c}$ = 106	
TDD configuration		Config 2,5	TDDConf.1.1		TDDConf.1.1		TDDConf.1.1	
		Config 3,6	TDDConf.2.1		TDDConf.2.1		TDDConf.2.1	
Initial DL BWP		Config 1,2,3,4,5,6	DLBWP.0.1		DLBWP.0.1		DLBWP.0.1	
Initial UL BWP		Config 1,2,3,4,5,6	ULBWP.0.1		NA		NA	
Dedicated DL BWP		Config 1,2,3,4,5,6	DLBWP.1.1		DLBWP.1.1		DLBWP.1.1	
Dedicated UL BWP		Config 1,2,3,4,5,6	ULBWP.1.1		NA		NA	
TRS configuration		Config 1,4	TRS.1.1 FDD		NA		NA	
		Config 2,5	TRS.1.1 TDD		NA		NA	
		Config 3,6	TRS.1.2 TDD		NA		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		Config 1,2,3,4,5,6	OP.1		OP.1		OP.1	
PDSCH Reference measurement channel		Config 1,4	SR.1.1 FDD		SR.1.1 FDD		SR.1.1 FDD	
		Config 2,5	SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
		Config 3,6	SR2.1 TDD		SR2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel		Config 1,4	CR.1.1 FDD		CR.1.1 FDD		CR.1.1 FDD	
		Config 2,5	CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
		Config 3,6	CR2.1 TDD		CR2.1 TDD		CR2.1 TDD	
		Config 1,4	CCR.1.1 FDD		CCR.1.1 FDD		CCR.1.1 FDD	

Dedicated CORESET Reference Channel		Config 2,5	CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD		
		Config 3,6	CCR.2.1 TDD		CCR.2.1 TDD		CCR.2.1 TDD		
SSB parameters		Config 1,4	SSB.1 FR1		SSB.5 FR1		SSB.5 FR1		
		Config 2,5	SSB.1 FR1		SSB.5 FR1		SSB.5 FR1		
		Config 3,6	SSB.2 FR1		SSB.6 FR1		SSB.6 FR1		
SMTC configuration defined in A.3.11		Config 1,4	SMTC.2		SMTC.5		SMTC.5		
		Config 2,3,5,6	SMTC.1		SMTC.4		SMTC.4		
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2,4,5	15						
		Config 3,6	30						
EPRE ratio of PSS to SSS		Config 1,2,3,4,5,6	0		0		0		
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2	dBm/ 15kHz		-98		-98		-98		
N_{oc} Note2	dBm/ SCS	Config 1,2,4,5	-98		-98		-98		
		Config 3,6	-95		-95		-95		
SS-RSRP Note 3	dBm/ SCS	Config 1,2,4,5	-94	-94	-94	-94	-Infinity	-94	
		Config 3,6	-91	-91	-91	-91	-Infinity	-91	
$\hat{E}_s / I_{ot}$	dB	Config 1,2,3,4,5,6	4	4	4	-1.46	-Infinity	-1.46	
$\hat{E}_s / N_{oc}$	dB	Config 1,2,3,4,5,6	4	4	4	4	-Infinity	4	
Io Note3	dBm/ 9.36 MHz	Config 1,2,4,5	-64.59	-64.59	-64.59	-62.26	-64.59	-62.26	
	dBm/ 38.16 MHz	Config 3,6	-58.49	-58.49	-58.49	-56.15	-58.49	-56.15	
Propagation Condition		Config 1,2,4,5	AWGN		AWGN		AWGN 1944Hz Note 5		
		Config 3,6	AWGN		AWGN		AWGN 3334Hz Note 6		

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	The AWGN 1944 Hz condition is a non fading propagation channel with one tap. Doppler shift is a constant 1944Hz.
Note 6:	The AWGN 3334 Hz condition is a non fading propagation channel with one tap. Doppler shift is a constant 3334Hz.

A.4.6.1.8.2 Test Requirements

The UE shall send one Event A6 triggered measurement report, with a measurement reporting delay less than 1600 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.2 Inter-frequency Measurements

A.4.6.2.1 EN-DC event triggered reporting tests for FR1 cell without SSB time index detection when DRX is not used

A.4.6.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 on NR RF channel 2. The test parameters and configurations are given in Tables A.4.6.2.1.1-1, A.4.6.2.1.1-2, and A.4.6.2.1.1-3.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.4.6.2.1.1-2 is provided for a UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #4 as defined in Table A.4.6.2.1.1-2 is provided for UE that support per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 2. Otherwise it is only required to pass test 1.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.1-1. Supported test configurations are shown in table A.4.6.2.1.1-1.

Table A.4.6.2.1.1-1: EN-DC event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: target NR cell3 has the same SCS, BW and duplex mode as NR serving cell2	

Table A.4.6.2.1.1-2: General test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1		One E-UTRAN carrier frequencies is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1, 2		Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3,4,5,6	LTE Cell 1 (PCell) and NR cell 2 (PScell)		LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4,5,6	NR cell 3		NR cell 3 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4,5,6	0	4	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4,5,6	9	9	
A3-Offset	dB	Config 1,2,3,4,5,6	-6		
Hysteresis	dB	Config 1,2,3,4,5,6	0		
CP length		Config 1,2,3,4,5,6	Normal		
TimeToTrigger	s	Config 1,2,3,4,5,6	0		
Filter coefficient		Config 1,2,3,4,5,6	0		L3 filtering is not used
DRX		Config 1,2,3,4,5,6	OFF		DRX is not used
Time offset between PCell and PSCell		Config 1,2,3,4,5,6	3 μs		Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,4	3 ms		Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		Config 2,3,5,6	3 μs		Synchronous cells.
T1	s	Config 1,2,3,4,5,6	5		
T2	s	Config 1,2,3,4,5,6	1	1	

Table A.4.6.2.1.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
NR RF Channel Number		Config 1,2,3,4,5,6	1		2	
Duplex mode		Config 1,4	FDD			
		Config 2,3,5,6	TDD			

$BW_{channel}$	MHz	Config 1,4	10: $N_{RB,c}$ = 52	
		Config 2,5	10: $N_{RB,c}$ = 52	
		Config 3,6	40: $N_{RB,c}$ = 106	
BWP BW	MHz	Config 1,4	10: $N_{RB,c}$ = 52	
		Config 2,5	10: $N_{RB,c}$ = 52	
		Config 3,6	40: $N_{RB,c}$ = 106	
TDD configuration		Config 2,5	TDDConf.1.1	TDDConf.1.1
		Config 3,6	TDDConf.2.1	TDDConf.2.1
Initial DL BWP		Config 1,2,3,4,5,6	DLBWP.0.1	NA
Initial UL BWP		Config 1,2,3,4,5,6	ULBWP.0.1	NA
Dedicated DL BWP		Config 1,2,3,4,5,6	DLBWP.1.1	NA
Dedicated UL BWP		Config 1,2,3,4,5,6	ULBWP.1.1	NA
TRS configuration		Config 1,4	TRS.1.1 FDD	NA
		Config 2,5	TRS.1.1 TDD	NA
		Config 3,6	TRS.1.2 TDD	NA
OCNG Patterns defined in A.3.2.1.1 (OP.1)		Config 1,2,3,4,5,6	OP.1	OP.1
PDSCH Reference measurement channel		Config 1,4	SR.1.1 FDD	-
		Config 2,5	SR.1.1 TDD	
		Config 3,6	SR2.1 TDD	
RMSI CORESET Reference Channel		Config 1,4	CR.1.1 FDD	-
		Config 2,5	CR.1.1 TDD	
		Config 3,6	CR2.1 TDD	
Dedicated CORESET Reference Channel		Config 1,4	CCR.1.1 FDD	-
		Config 2,5	CCR.1.1 TDD	
		Config 3,6	CCR.2.1 TDD	
SSB parameters		Config 1,4	SSB.1 FR1	SSB.5 FR1
		Config 2,5	SSB.1 FR1	SSB.5 FR1
		Config 3,6	SSB.2 FR1	SSB.6 FR1
SMTC configuration defined in A.3.11		Config 1,4	SMTC.2	SMTC.5
		Config 2,3,5,6	SMTC.1	SMTC.4
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2,4,5	15	
		Config 3,6	30	
EPRE ratio of PSS to SSS		Config 1,2,3,4,5,6	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	dBm/15kHz		-98	-98
N_{oc} Note2		Config 1,2,4,5	-98	-98

	dBm/SCS	Config 3,6	-95		-95	
SS-RSRP Note 3	dBm/SCS	Config 1,2,4,5	-94	-94	-Infinity	-91
		Config 3,6	-91	-91	-Infinity	-88
$\hat{E}_s / I_{ot}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s / N_{oc}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
Io Note3	dBm/9.36 MHz	Config 1,2,4,5	-64.59	-64.59	-70.05	-62.26
	dBm/38.16MHz	Config 3,6	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3,4,5,6	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.4.6.2.1.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 760 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2 UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.2.2 EN-DC event triggered reporting tests for FR1 cell without SSB time index detection when DRX is used

A.4.6.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 on NR RF channel 2. The test parameters and configurations are given in Tables A.4.6.2.2.1-1, A.4.6.2.2.1-2, and A.4.6.2.2.1-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table A.4.6.2.2.1-2 is provided for a UE that does not support per-FR gap and in test 3&4 measurement gap pattern configuration #4 as defined in Table A.4.6.2.2.1-2 is provided for UE that support per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 3&4. Otherwise it is only required to pass test 1&2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.1-1. Supported test configurations are shown in table A.4.6.2.2.1-1.

UE needs to be provided with new Timing Advance Command MAC control at least once during each time alignment timer period to maintain uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.4.6.2.2.1-1: EN-DC event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: target NR cell3 has the same SCS, BW and duplex mode as NR serving cell2	

Table A.4.6.2.2.1-2: General test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

Parameter	Unit	Test configuration	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1				One E-UTRAN carrier frequencies is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1, 2				Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3,4,5,6	LTE Cell 1 (PCell) and NR cell 2 (PScell)				LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4,5,6	NR cell 3				NR cell 3 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4,5,6	0		4		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4,5,6	9		9		
A3-Offset	dB	Config 1,2,3,4,5,6	-6				
Hysteresis	dB	Config 1,2,3,4,5,6	0				
CP length		Config 1,2,3,4,5,6	Normal				
TimeToTrigger	s	Config 1,2,3,4,5,6	0				
Filter coefficient		Config 1,2,3,4,5,6	0				L3 filtering is not used
DRX	ms	Config 1,2,3,4,5,6	DRX .1	DRX . 7	DRX .1	DRX . 7	As specified in clause A.3.3
Time offset between PCell and PSCell		Config 1,2,3,4,5,6	3 µs				Synchronous EN-DC

Time offset between serving and neighbour cells		Config 1,4	3ms				Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		Config 2,3,5,6	3μs				Synchronous cells.
T1	s	Config 1,2,3,4,5,6	5				
T2	s	Config 1,2,3,4,5,6	1.1	11	1.1	11	

Table A.4.6.2.2.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
NR RF Channel Number		Config 1,2,3,4,5,6	1		2	
Duplex mode		Config 1,4	FDD			
		Config 2,3,5,6	TDD			
$BW_{channel}$	MHz	Config 1,4	10: $N_{RB,c}$ = 52			
		Config 2,5	10: $N_{RB,c}$ = 52			
		Config 3,6	40: $N_{RB,c}$ = 106			
BWP BW	MHz	Config 1,4	10: $N_{RB,c}$ = 52			
		Config 2,5	10: $N_{RB,c}$ = 52			
		Config 3,6	40: $N_{RB,c}$ = 106			
TDD configuration		Config 2,5	TDDConf.1.1			
		Config 3,6	TDDConf.2.1			
Initial DL BWP		Config 1,2,3,4,5,6	DLBWP.0.1		NA	
Initial UL BWP		Config 1,2,3,4,5,6	ULBWP.0.1		NA	
Dedicated DL BWP		Config 1,2,3,4,5,6	DLBWP.1.1		NA	
Dedicated UL BWP		Config 1,2,3,4,5,6	ULBWP.1.1		NA	
TRS configuration		Config 1,4	TRS.1.1 FDD		NA	
		Config 2,5	TRS.1.1 TDD		NA	
		Config 3,6	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		Config 1,2,3,4,5,6	OP.1		OP.1	
PDSCH Reference measurement channel		Config 1,4	SR.1.1 FDD		-	
		Config 2,5	SR.1.1 TDD			
		Config 3,6	SR2.1 TDD			
RMSI CORESET Reference Channel		Config 1,4	CR.1.1 FDD		-	
		Config 2,5	CR.1.1 TDD			
		Config 3,6	CR2.1 TDD			
Dedicated CORESET Reference Channel		Config 1,4	CCR.1.1 FDD		-	
		Config 2,5	CCR.1.1 TDD			
		Config 3,6	CCR.2.1 TDD			
SSB parameters		Config 1,4	SSB.1 FR1		SSB.5 FR1	
		Config 2,5	SSB.1 FR1		SSB.5 FR1	
		Config 3,6	SSB.2 FR1		SSB.6 FR1	
SMTC configuration defined in A.3.11		Config 1,4	SMTC.2		SMTC.5	
		Config 2,3,5,6	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2,4,5	15			

		Config 3,6	30			
EPRE ratio of PSS to SSS		Config 1,2,3,4,5,6	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15kHz		-98		-98	
N_{oc} Note2	dBm/SCS	Config 1,2,4,5	-98		-98	
		Config 3,6	-95		-95	
SS-RSRP Note 3	dBm/SCS	Config 1,2,4,5	-94	-94	-Infinity	-91
		Config 3,6	-91	-91	-Infinity	-88
$\hat{E}_s / I_{ot}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s / N_{oc}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
Io Note3	dBm/9.36 MHz	Config 1,2,4,5	-64.59	-64.59	-70.05	-62.26
	dBm/38.16 MHz	Config 3,6	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3,4,5,6	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.4.6.2.2.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1080 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 10240 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 3 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1080 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 4 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 10240 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1, 2, 3 and 4 UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.2.3 Void

A.4.6.2.4 Void

A.4.6.2.5 EN-DC event triggered reporting tests for FR1 cell with SSB time index detection when DRX is not used

A.4.6.2.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 on NR RF channel 2. The test parameters and configurations are given in Tables A.4.6.2.5.1-1, A.4.6.2.5.1-2, and A.4.6.2.5.1-3.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.4.6.2.5.1-2 is provided for a UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #4 as defined in Table A.4.6.2.5.1-2 is provided for UE that support per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 2. Otherwise it is only required to pass test 1.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.1-1. Supported test configurations are shown in table A.4.6.2.5.1-1.

Table A.4.6.2.5.1-1: EN-DC event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: target NR cell3 has the same SCS, BW and duplex mode as NR serving cell2	

Table A.4.6.2.5.1-2: General test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1		One E-UTRAN carrier frequencies is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1, 2		Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3,4,5,6	LTE Cell 1 (PCell) and NR cell 2 (PScell)		LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4,5,6	NR cell 3		NR cell 3 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4,5,6	0	4	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4,5,6	9	9	
A3-Offset	dB	Config 1,2,3,4,5,6	-6		
Hysteresis	dB	Config 1,2,3,4,5,6	0		
CP length		Config 1,2,3,4,5,6	Normal		
TimeToTrigger	s	Config 1,2,3,4,5,6	0		
Filter coefficient		Config 1,2,3,4,5,6	0		L3 filtering is not used
DRX		Config 1,2,3,4,5,6	OFF		DRX is not used
Time offset between PCell and PSCell		Config 1,2,3,4,5,6	3 µs		Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,4	3ms		Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		Config 2,3,5,6	3µs		Synchronous cells.
T1	s	Config 1,2,3,4,5,6	5		
T2	s	Config 1,2,3,4,5,6	1.1	1	

Table A.4.6.2.5.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
NR RF Channel Number		Config 1,2,3,4,5,6	1		2	
Duplex mode		Config 1,4	FDD			
		Config 2,3,5,6	TDD			
$BW_{channel}$	MHz	Config 1,4	10: $N_{RB,c}$ = 52			
		Config 2,5	10: $N_{RB,c}$ = 52			
		Config 3,6	40: $N_{RB,c}$ = 106			

BWP BW	MHz	Config 1,4	10: $N_{RB,c}$ = 52	
		Config 2,5	10: $N_{RB,c}$ = 52	
		Config 3,6	40: $N_{RB,c}$ = 106	
TDD configuration		Config 2,5	TDDConf.1.1	
		Config 3,6	TDDConf.2.1	
Initial DL BWP		Config 1,2,3,4,5,6	DLBWP.0.1	NA
Initial UL BWP		Config 1,2,3,4,5,6	ULBWP.0.1	NA
Dedicated DL BWP		Config 1,2,3,4,5,6	DLBWP.1.1	NA
Dedicated UL BWP		Config 1,2,3,4,5,6	ULBWP.1.1	NA
TRS configuration		Config 1,4	TRS.1.1 FDD	NA
		Config 2,5	TRS.1.1 TDD	NA
		Config 3,6	TRS.1.2 TDD	NA
OCNG Patterns defined in A.3.2.1.1 (OP.1)		Config 1,2,3,4,5,6	OP.1	OP.1
PDSCH Reference measurement channel		Config 1,4	SR.1.1 FDD	
		Config 2,5	SR.1.1 TDD	
		Config 3,6	SR2.1 TDD	
RMSI CORESET Reference Channel		Config 1,4	CR.1.1 FDD	-
		Config 2,5	CR.1.1 TDD	
		Config 3,6	CR.2.1 TDD	
Dedicated CORESET Reference Channel		Config 1,4	CCR.1.1 FDD	-
		Config 2,5	CCR.1.1 TDD	
		Config 3,6	CCR.2.1 TDD	
SSB parameters		Config 1,4	SSB.1 FR1	SSB.5 FR1
		Config 2,5	SSB.1 FR1	SSB.5 FR1
		Config 3,6	SSB.2 FR1	SSB.6 FR1
SMTC configuration defined in A.3.11		Config 1,4	SMTC.2	SMTC.5
		Config 2,3,5,6	SMTC.1	SMTC.4
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2,4,5	15	
		Config 3,6	30	
EPRE ratio of PSS to SSS		Config 1,2,3,4,5,6	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	dBm/15 kHz		-98	-98
N_{oc} Note2	dBm/SCS	Config 1,2,4,5	-98	-98
		Config 3,6	-95	-95

SS-RSRP Note 3	dBm/SCS	Config 1,2,4,5	-94	-94	-Infinity	-91
		Config 3,6	-91	-91	-Infinity	-88
$\hat{E}_s / I_{ot}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s / N_{oc}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
Io Note3	dBm/9.36MHz	Config 1,2,4,5	-64.59	-64.59	-70.05	-62.26
	dBm/38.16MHz	Config 3,6	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3,4,5,6	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.4.6.2.5.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1040 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 880 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2 UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.2.6 EN-DC event triggered reporting tests for FR1 cell with SSB time index detection when DRX is used

A.4.6.2.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 on NR RF channel 2. The test parameters and configurations are given in Tables A.4.6.2.6.1-1, A.4.6.2.6.1-2, and A.4.6.2.6.1-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table A.4.6.2.6.1-2 is provided for a UE that does not support per-FR gap and in test 3&4 measurement gap pattern configuration #4 as defined in Table A.4.6.2.6.1-2 is provided for UE that support per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 3&4. Otherwise it is only required to pass test 1&2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.1-1. Supported test configurations are shown in table A.4.6.2.6.1-1.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.4.6.2.6.1-1: EN-DC event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: target NR cell3 has the same SCS, BW and duplex mode as NR serving cell2	

Table A.4.6.2.6.1-2: General test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

Parameter	Unit	Test configuration	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1				One E-UTRAN carrier frequencies is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1, 2				Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3,4,5,6	LTE Cell 1 (PCell) and NR cell 2 (PScell)				LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4,5,6	NR cell 3				NR cell 3 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4,5,6	0		4		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4,5,6	9		9		
A3-Offset	dB	Config 1,2,3,4,5,6	-6				
Hysteresis	dB	Config 1,2,3,4,5,6	0				
CP length		Config 1,2,3,4,5,6	Normal				
TimeToTrigger	s	Config 1,2,3,4,5,6	0				
Filter coefficient		Config 1,2,3,4,5,6	0				L3 filtering is not used
DRX	ms	Config 1,2,3,4,5,6	DRX .1	DRX . 7	DRX .1	DRX . 7	As specified in clause A.3.3
Time offset between PCell and PSCell		Config 1,2,3,4,5,6	3 μs				Synchronous EN-DC

Time offset between serving and neighbour cells		Config 1,4	3ms				Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		Config 2,3,5,6	3μs				Synchronous cells.
T1	s	Config 1,2,3,4,5,6	5				
T2	s	Config 1,2,3,4,5,6	1.3	13.5	1.3	13.5	

Table A.4.6.2.6.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
NR RF Channel Number		Config 1,2,3,4,5,6	1		2	
Duplex mode		Config 1,4	FDD			
		Config 2,3,5,6	TDD			
$BW_{channel}$	MHz	Config 1,4	10: $N_{RB,c}$ = 52			
		Config 2,5	10: $N_{RB,c}$ = 52			
		Config 3,6	40: $N_{RB,c}$ = 106			
BWP BW	MHz	Config 1,4	10: $N_{RB,c}$ = 52			
		Config 2,5	10: $N_{RB,c}$ = 52			
		Config 3,6	40: $N_{RB,c}$ = 106			
OCNG Patterns defined in A.3.2.1.1 (OP.1)		Config 1,2,3,4,5,6	OP.1		OP.1	
PDSCH Reference measurement channel		Config 1,4	SR.1.1 FDD		-	
		Config 2,5	SR.1.1 TDD			
		Config 3,6	SR2.1 TDD			
RMSI CORESET Reference Channel		Config 1,4	CR.1.1 FDD		-	
		Config 2,5	CR.1.1 TDD			
		Config 3,6	CR.2.1 TDD			
Dedicated CORESET Reference Channel		Config 1,4	CCR.1.1 FDD		-	
		Config 2,5	CCR.1.1 TDD			
		Config 3,6	CCR.2.1 TDD			
TDD configuration		Config 2,5	TDDConf.1.1			
		Config 3,6	TDDConf.2.1			
Initial DL BWP		Config 1,2,3,4,5,6	DLBWP.0.1			
TRS configuration		Config 1,4	TRS.1.1 FDD		N/A	
		Config 2,5	TRS.1.1 TDD		N/A	
		Config 3,6	TRS.1.2 TDD		N/A	
Initial UL BWP		Config 1,2,3,4,5,6	ULBWP.0.1			
Dedicated DL BWP		Config 1,2,3,4,5,6	DLBWP.1.1			
Dedicated UL BWP		Config 1,2,3,4,5,6	ULBWP.1.1			
SSB parameters		Config 1,4	SSB.1 FR1			
		Config 2,5	SSB.1 FR1			
		Config 3,6	SSB.2 FR1			
SMTC configuration defined in A.3.11		Config 1,4	SMTC.2			
		Config 2,3,5,6	SMTC.1			

PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2,4,5	15			
		Config 3,6	30			
EPRE ratio of PSS to SSS		Config 1,2,3,4,5,6	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15 kHz		-98		-98	
N_{oc} Note2	dBm/SCS	Config 1,2,4,5	-98		-98	
		Config 3,6	-95		-95	
SS-RSRP Note 3	dBm/SCS	Config 1,2,4,5	-94	-94	-Infinity	-91
		Config 3,6	-91	-91	-Infinity	-88
$\hat{E}_s / I_{ot}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s / N_{oc}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
Io Note3	dBm/9.36MHz	Config 1,2,4,5	-64.59	-64.59	-70.05	-62.26
	dBm/38.16MHz	Config 3,6	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3,4,5,6	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.4.6.2.6.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1280 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 13440 ms from the beginning of time period T2. The UE shall not send event triggered

measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 3 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1280 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 4 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 13440 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1, 2, 3 and 4 UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.2.7 Void

A.4.6.2.8 Void

A.4.6.2.9 EN-DC event triggered reporting tests for FR1 cell without SSB time index detection when DRX is used for UE configured with highSpeedMeasInterFreq-r17

A.4.6.2.9.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event for UE configured with highSpeedMeasInterFreq-r17. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 on NR RF channel 2. The test parameters and configurations are given in Tables A.4.6.2.9.1-1, A.4.6.2.9.1-2, and A.4.6.2.9.1-3.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.4.6.2.9.1-2 is provided for a UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #4 as defined in Table A.4.6.2.91-2 is provided for UE that support per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 2. Otherwise it is only required to pass test 1.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.1-1. Supported test configurations are shown in table A.4.6.2.9.1-1.

UE needs to be provided with new Timing Advance Command MAC control at least once during each time alignment timer period to maintain uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.4.6.2.9.1-1: EN-DC event triggered reporting tests without SSB index reading for FR1-FR1 for UE configured with highSpeedMeasInterFreq-r17

Config	Description

1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: target NR cell3 has the same SCS, BW and duplex mode as NR serving cell2	

Table A.4.6.2.9.1-2: General test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection for UE configured with highSpeedMeasInterFreq-r17

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1		One E-UTRAN carrier frequencies is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1, 2		Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3,4,5,6	LTE Cell 1 (PCell) and NR cell 2 (PScell)		LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4,5,6	NR cell 3		NR cell 3 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4,5,6	0	4	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4,5,6	9	9	
A3-Offset	dB	Config 1,2,3,4,5,6	-6		
Hysteresis	dB	Config 1,2,3,4,5,6	0		
CP length		Config 1,2,3,4,5,6	Normal		
TimeToTrigger	s	Config 1,2,3,4,5,6	0		
Filter coefficient		Config 1,2,3,4,5,6	0		L3 filtering is not used
DRX	ms	Config 1,2,3,4,5,6	DRX.4		As specified in clause A.3.3
Time offset between PCell and PSCell		Config 1,2,3,4,5,6	3 µs		Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,4	3ms		Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		Config 2,3,5,6	3µs		Synchronous cells.
T1	s	Config 1,2,3,4,5,6	[5]		
T2	s	Config 1,2,3,4,5,6	[3]		

Table A.4.6.2.9.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection for UE configured with highSpeedMeasInterFreq-r17

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2

NR RF Channel Number		Config 1,2,3,4,5,6	1	2
Duplex mode		Config 1,4	FDD	
		Config 2,3,5,6	TDD	
$BW_{channel}$	MHz	Config 1,4	10: $N_{RB,c}$ = 52	
		Config 2,5	10: $N_{RB,c}$ = 52	
		Config 3,6	40: $N_{RB,c}$ = 106	
BWP BW	MHz	Config 1,4	10: $N_{RB,c}$ = 52	
		Config 2,5	10: $N_{RB,c}$ = 52	
		Config 3,6	40: $N_{RB,c}$ = 106	
TDD configuration		Config 2,5	TDDConf.1.1	
		Config 3,6	TDDConf.2.1	
Initial DL BWP		Config 1,2,3,4,5,6	DLBWP.0.1	NA
Initial UL BWP		Config 1,2,3,4,5,6	ULBWP.0.1	NA
Dedicated DL BWP		Config 1,2,3,4,5,6	DLBWP.1.1	NA
Dedicated UL BWP		Config 1,2,3,4,5,6	ULBWP.1.1	NA
TRS configuration		Config 1,4	TRS.1.1 FDD	NA
		Config 2,5	TRS.1.1 TDD	NA
		Config 3,6	TRS.1.2 TDD	NA
OCNG Patterns defined in A.3.2.1.1 (OP.1)		Config 1,2,3,4,5,6	OP.1	OP.1
PDSCH Reference measurement channel		Config 1,4	SR.1.1 FDD	-
		Config 2,5	SR.1.1 TDD	
		Config 3,6	SR2.1 TDD	
RMSI CORESET Reference Channel		Config 1,4	CR.1.1 FDD	-
		Config 2,5	CR.1.1 TDD	
		Config 3,6	CR2.1 TDD	
Dedicated CORESET Reference Channel		Config 1,4	CCR.1.1 FDD	-
		Config 2,5	CCR.1.1 TDD	
		Config 3,6	CCR.2.1 TDD	
SSB parameters		Config 1,4	SSB.1 FR1	SSB.5 FR1
		Config 2,5	SSB.1 FR1	SSB.5 FR1
		Config 3,6	SSB.2 FR1	SSB.6 FR1
SMTC configuration defined in A.3.11		Config 1,4	SMTC.2	SMTC.5
		Config 2,3,5,6	SMTC.1	SMTC.4
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2,4,5	15	
		Config 3,6	30	
EPRE ratio of PSS to SSS		Config 1,2,3,4,5,6	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				

EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15kHz		-98		-98	
N_{oc} Note2	dBm/SCS	Config 1,2,4,5	-98		-98	
		Config 3,6	-95		-95	
SS-RSRP Note 3	dBm/SCS	Config 1,2,4,5	-94	-94	-Infinity	-91
		Config 3,6	-91	-91	-Infinity	-88
$\hat{E}_s / I_{ot}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s / N_{oc}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
Io Note3	dBm/9.36 MHz	Config 1,2,4,5	-64.59	-64.59	-70.05	-62.26
	dBm/38.16 MHz	Config 3,6	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,4,5	AWGN		AWGN 1944Hz Note 5	
		Config 3,6			AWGN 3334Hz Note 6	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: The AWGN 1944 Hz condition is a non fading propagation channel with one tap. Doppler shift is a constant 1944Hz.

Note 6: The AWGN 3334 Hz condition is a non fading propagation channel with one tap. Doppler shift is a constant 3334Hz.

A.4.6.2.9.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 2240 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 2240 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2 UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.3 Void

A.4.6.4 L1-RSRP measurement for beam reporting

A.4.6.4.1 SSB based L1-RSRP measurement when DRX is not used

A.4.6.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.1, with the testing configurations for NR cells in Table A.4.6.4.1.1-1.

Table A.4.6.4.1.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.4.6.4.1.2 Test parameters

There are two cells in the test, E-UTRAN PCell (Cell 1) and FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.4.6.4.1.2-1 and Table A.4.6.4.1.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.4.6.4.1.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~6		freq1
Duplex mode	1,4		FDD
	2,5		TDD
	3,6		TDD
TDD Configuration	1,4		N/A
	2,5		TDDConf.1.1
	3,6		TDDConf.2.1
$BW_{channel}$	1,4	MHz	10: $N_{RB,c}$ = 52
	2,5		10: $N_{RB,c}$ = 52
	3,6		40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2,5		SR.1.1 TDD
	3,6		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2,5		CR.1.1 TDD
	3,6		CR.2.1 TDD

Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD
	2,5		CCR.1.1 TDD
	3,6		CCR.2.1 TDD
SSB configuration	1,4		SSB.3 FR1
	2,5		SSB.3 FR1
	3,6		SSB.4 FR1
OCNG Patterns	1~6		OP.1
Initial BWP Configuration	1~6		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~6		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~6		SMTC.1
TRS Configuration	1,4		TRS.1.1 FDD
	2,5		TRS.1.1 TDD
	3,6		TRS.1.2 TDD
DRX configuration	1~6		Off
reportConfigType	1~6		periodic
reportQuantity	1~6		ssb-Index-RSRP
Number of reported RS	1~6		2
L1-RSRP reporting period	1~6	slot	80
T1	1~6	s	5
T2	1~6	s	1
EPRE ratio of PSS to SSS	1~6	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~6		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.4.6.4.1.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
N_{oc} Note2	1~6	dBm/15kHz	-94.65			
N_{oc} Note2	1,2,4,5	dBm/SSB SCS	-94.65			
	3,6		-91.65			
$\hat{E}_s / I_{ot}$	1~6	dB	0	0	-Infinity	3
SSB RSRP Note3	1,2,4,5	dBm/SSB SCS	-94.65	-94.65	-Infinity	-91.65
	3,6		-91.65	-91.65	-Infinity	-88.65
Io Note3	1,2,4,5	dBm/9.36 MHz	-63.69	-63.69	-66.70	-61.93

	3,6	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.84
$\hat{E}_s / N_{oc}$	1~6	dB	0	0	-Infinity	3
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.4.6.4.1.3 Test Requirements

The UE shall send L1-RSRP report every 80 slots. No later than 640ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute accuracy requirement in clause 10.1.19.1.1 and relative accuracy requirement in clause 10.1.19.1.2. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.4.2 SSB based L1-RSRP measurement when DRX is used

A.4.6.4.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.1, with the testing configurations for NR cells in Table A.4.6.4.2.1-1.

Table A.4.6.4.2.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.4.6.4.2.2 Test parameters

There are two cells in the test, E-UTRAN PCell (Cell 1) and FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.4.6.4.2.2-1 and Table A.4.6.4.2.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.4.6.4.2.2-1: General test parameters

Parameter	Config	Unit	Value

SSB GSCN	1~6		freq1
Duplex mode	1,4		FDD
	2,5		TDD
	3,6		TDD
TDD Configuration	1,4		N/A
	2,5		TDDConf.1.1
	3,6		TDDConf.2.1
$BW_{channel}$	1,4	MHz	10: $N_{RB,c}$ = 52
	2,5		10: $N_{RB,c}$ = 52
	3,6		40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2,5		SR.1.1 TDD
	3,6		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2,5		CR.1.1 TDD
	3,6		CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD
	2,5		CCR.1.1 TDD
	3,6		CCR.2.1 TDD
SSB configuration	1,4		SSB.3 FR1
	2,5		SSB.3 FR1
	3,6		SSB.4 FR1
OCNG Patterns	1~6		OP.1
Initial BWP Configuration	1~6		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~6		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~6		SMTC.1
TRS Configuration	1,4		TRS.1.1 FDD
	2,5		TRS.1.1 TDD
	3,6		TRS.1.2 TDD
DRX configuration	1~6		DRX.3
reportConfigType	1~6		periodic
reportQuantity	1~6		ssb-Index-RSRP
Number of reported RS	1~6		2
L1-RSRP reporting period	1~6	slot	80
T1	1~6	s	5
T2	1~6	s	1
EPRE ratio of PSS to SSS	1~6	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~6		AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Table A.4.6.4.2.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
N_{oc} Note2	1~6	dBm/15kHz	-94.65			
N_{oc} Note2	1,2,4,5	dBm/SSB SCS	-94.65			
	3,6		-91.65			
$\hat{E}_s / I_{ot}$	1~6	dB	0	0	-Infinity	3
SSB RSRP Note3	1,2,4,5	dBm/SSB SCS	-94.65	-94.65	-Infinity	-91.65
	3,6		-91.65	-91.65	-Infinity	-88.65
Io Note3	1,2,4,5	dBm/9.36 MHz	-63.69	-63.69	-66.70	-61.93
	3,6	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.84
$\hat{E}_s / N_{oc}$	1~6	dB	0	0	-Infinity	3

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.4.6.4.2.3 Test Requirements

The UE shall send L1-RSRP report every 80 slots. No later than 640ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting absolute accuracy requirement in clause 10.1.19.1.1 and relative accuracy requirement in clause 10.1.19.1.2. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.4.3 CSI-RS based L1-RSRP measurement when DRX is not used

A.4.6.4.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.2, with the testing configurations for NR cells in Table A.4.6.4.3.1-1.

Table A.4.6.4.3.1-1: Applicable NR configurations for FR1 CSI-RS based L1-RSRP test

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.4.6.4.3.2 Test parameters

There are two cells in the test, E-UTRAN PCell (Cell 1) and FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.4.6.4.3.2-1 and Table A.4.6.4.3.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the CSI-RS and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-RSRP on aperiodic CSI-RS resources. UE is also configured to measure L1-RSRP based on SSB. After 80ms from the beginning of the test, the DCI trigger comes in slot n (0 for Config 1,2,4,5 and 8 for Config 3,6) of a frame and UE provides the report back based on the reporting configuration as defined in Table A.4.6.4.3.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs.

Table A.4.6.4.3.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~6		freq1
Duplex mode	1,4		FDD
	2,5		TDD
	3,6		TDD
TDD Configuration	1,4		N/A
	2,5		TDDConf.1.1
	3,6		TDDConf.2.1
$BW_{channel}$	1,4	MHz	10: $N_{RB,c}$ = 52
	2,5		10: $N_{RB,c}$ = 52
	3,6		40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2,5		SR.1.1 TDD
	3,6		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2,5		CR.1.1 TDD
	3,6		CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD
	2,5		CCR.1.1 TDD
	3,6		CCR.2.1 TDD
SSB configuration	1,4		SSB.3 FR1
	2,5		SSB.3 FR1
	3,6		SSB.4 FR1
CSI-RS configuration	1,4		CSI-RS 1.3 FDD
	2,5		CSI-RS 1.3 TDD
	3,6		CSI-RS 2.3 TDD
OCNG Patterns	1~6		OP.1
TRS Configuration	1,4		TRS.1.1 FDD
	2,5		TRS.1.1 TDD
	3,6		TRS.1.2 TDD
Initial BWP Configuration	1~6		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~6		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~6		SMTC.1
DRX configuration	1~6		Off
reportConfigType	1~6		aperiodic
reportQuantity	1~6		cri-RSRP
Number of reported RS	1~6		2

qcl-Info	1~6		SSB#0 for resource#0 SSB#1 for resource#1
reportSlotOffsetList	1~6	slots	8
T1	1~6	s	5
EPRE ratio of PSS to SSS	1~6	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~6		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.4.6.4.3.2-2: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
N_{oc} Note1	1~6	dBm/15kHz	-94.65	
N_{oc} Note1	1,2,4,5	dBm/SSB SCS	-94.65	
	3,6		-91.65	
$\hat{E}_s / I_{ot}$	1~6	dB	0	3
CSI-RS RSRP Note2	1,2,4,5	dBm/SSB SCS	-94.65	-91.65
	3,6		-91.65	-88.65
Io Note2	1,2,4,5	dBm/9.36 MHz	-63.69	-61.93
	3,6	dBm/38.16 MHz	-57.59	-55.84
$\hat{E}_s / N_{oc}$	1~6	dB	0	3
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

A.4.6.4.3.3 Test Requirements

After 80ms from the beginning of the test, the UE shall send L1-RSRP report at slot 8 from the reception of DCI triggering the L1-RSRP measurement. The L1-RSRP report shall include the results for both CSI-RS#0 and CSI-RS#1 while meeting the absolute accuracy requirement in clause 10.1.20.1.1 and relative accuracy requirement in clause 10.1.20.1.2.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.4.4 CSI-RS based L1-RSRP measurement when DRX is used

A.4.6.4.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.2, with the testing configurations for NR cells in Table A.4.6.4.4.1-1.

Table A.4.6.4.4.1-1: Applicable NR configurations for FR1 CSI-RS based L1-RSRP test

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.4.6.4.4.2 Test parameters

There are two cells in the test, E-UTRAN PCell (Cell 1) and FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.4.6.4.4.2-1 and Table A.4.6.4.4.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the CSI-RS and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-RSRP on aperiodic CSI-RS resources. UE is also configured to measure L1-RSRP based on SSB. After 80ms from the beginning of the test, the DCI trigger comes in slot n (0 for Config 1,2,4,5 and 8 for Config 3,6) of a frame and UE provides the report back based on the reporting configuration as defined in Table A.4.6.4.4.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs.

Table A.4.6.4.4.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~6		freq1
Duplex mode	1,4		FDD
	2,5		TDD
	3,6		TDD
TDD Configuration	1,4		N/A
	2,5		TDDConf.1.1
	3,6		TDDConf.2.1
$BW_{channel}$	1,4	MHz	10: $N_{RB,c}$ = 52
	2,5		10: $N_{RB,c}$ = 52
	3,6		40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2,5		SR.1.1 TDD
	3,6		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2,5		CR.1.1 TDD
	3,6		CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD
	2,5		CCR.1.1 TDD
	3,6		CCR.2.1 TDD
SSB configuration	1,4		SSB.3 FR1

	2,5		SSB.3 FR1
	3,6		SSB.4 FR1
CSI-RS configuration	1,4		CSI-RS 1.3 FDD
	2,5		CSI-RS 1.3 TDD
	3,6		CSI-RS 2.3 TDD
OCNG Patterns	1~6		OP.1
TRS Configuration	1,4		TRS.1.1 FDD
	2,5		TRS.1.1 TDD
	3,6		TRS.1.2 TDD
Initial BWP Configuration	1~6		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~6		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~6		SMTC.1
DRX configuration	1~6		DRX.3
reportConfigType	1~6		aperiodic
reportQuantity	1~6		cri-RSRP
Number of reported RS	1~6		2
qcl-Info	1~6		SSB#0 for resource#0
			SSB#1 for resource#1
reportSlotOffsetList	1~6	slots	8
T1	1~6	s	5
EPRE ratio of PSS to SSS	1~6	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~6		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.4.6.4.4.2-2: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
N_{oc} Note1	1~6	dBm/15kHz	-94.65	
N_{oc} Note1	1,2,4,5	dBm/SSB SCS	-94.65	
	3,6		-91.65	
$\hat{E}_s / I_{ot}$	1~6	dB	0	3
CSI-RS RSRP Note2	1,2,4,5	dBm/SSB SCS	-94.65	-91.65
	3,6		-91.65	-88.65
Io Note2	1,2,4,5	dBm/9.36 MHz	-63.69	-61.93
	3,6	dBm/38.16 MHz	-57.59	-55.84
$\hat{E}_s / N_{oc}$	1~6	dB	0	3
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				

Note 3:	CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.4.6.4.4.3 Test Requirements

After 80ms from the beginning of the test, the UE shall send L1-RSRP report at slot 8 from the reception of DCI triggering the L1-RSRP measurement. The L1-RSRP report shall include the results for both CSI-RS#0 and CSI-RS#1 while meeting absolute accuracy requirement in clause 10.1.20.1.1 and relative accuracy requirement in clause 10.1.20.1.2.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.4.5 SSB based L1-RSRP measurement when DRX is used for UE configured with *highSpeedMeasFlag-r16*

A.4.6.4.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement when UE is configured with *highSpeedMeasFlag-r16*. This test will partly verify the L1-RSRP measurement requirements for UE configured with *highSpeedMeasFlag-r16* in clause 9.5.4.1, with the testing configurations for NR cells in Table A.4.6.4.5.1-1.

Table A.4.6.4.5.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.4.6.4.5.2 Test parameters

There are two cells in the test, E-UTRAN PCell (Cell 1) and FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.4.6.4.5.2-1 and Table A.4.6.4.5.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.4.6.4.5.2-1: General test parameters for UE configured with *highSpeedMeasFlag-r16*

Parameter	Config	Unit	Value
SSB GSCN	1~6		freq1
Duplex mode	1,4		FDD
	2,5		TDD
	3,6		TDD
TDD Configuration	1,4		N/A

	2,5		TDDConf.1.1
	3,6		TDDConf.2.1
$BW_{channel}$	1,4	MHz	10: $N_{RB,c}$ = 52
	2,5		10: $N_{RB,c}$ = 52
	3,6		40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2,5		SR.1.1 TDD
	3,6		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2,5		CR.1.1 TDD
	3,6		CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD
	2,5		CCR.1.1 TDD
	3,6		CCR.2.1 TDD
SSB configuration	1,4		SSB.3 FR1
	2,5		SSB.3 FR1
	3,6		SSB.4 FR1
OCNG Patterns	1~6		OP.1
Initial BWP Configuration	1~6		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~6		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~6		SMTC.1
TRS Configuration	1,4		TRS.1.1 FDD
	2,5		TRS.1.1 TDD
	3,6		TRS.1.2 TDD
DRX configuration	1~6		DRX.3
reportConfigType	1~6		periodic
reportQuantity	1~6		ssb-Index-RSRP
Number of reported RS	1~6		2
L1-RSRP reporting period	1~6	slot	80
T1	1~6	s	5
T2	1~6	s	2
EPRE ratio of PSS to SSS	1~6	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.4.6.4.5.2-2: SSB specific test parameters for UE configured with *highSpeedMeasFlag-r16*

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
N_{oc} Note2	1~6	dBm/15kHz	-94.65			
N_{oc} Note2	1,2,4,5	dBm/SSB SCS	-94.65			
	3,6		-91.65			
$\hat{E}_s / I_{ot}$	1~6	dB	0	0	-Infinity	3
SSB RSRP Note3	1,2,4,5	dBm/SSB SCS	-94.65	-94.65	-Infinity	-91.65
	3,6		-91.65	-91.65	-Infinity	-88.65
Io Note3	1,2,4,5	dBm/9.36 MHz	-63.69	-63.69	-66.70	-61.93
	3,6	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.84
$\hat{E}_s / N_{oc}$	1~6	dB	0	0	-Infinity	3
Propagation condition	1,2,4,5		AWGN		AWGN 1944Hz	
	3,6		AWGN		AWGN 3334Hz	

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.4.6.4.5.3 Test Requirements

The UE shall send L1-RSRP report every 80 slots. No later than 640ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting absolute accuracy requirement in clause 10.1.19.1.1 and relative accuracy requirement in clause 10.1.19.1.2. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.5 CLI measurements

A.4.6.5.1 SRS-RSRP measurement with non-DRX

A.4.6.5.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of SRS-RSRP measurement. This test will verify the SRS-RSRP measurement requirements in clause 9.7.2.5 with the testing configurations for NR cells in Table A.4.6.5.1.1-1.

Table A.4.6.5.1.1-1: Applicable NR configurations for FR1 SRS-RSRP test

Configuration	Description
1	NR 15 kHz SRS SCS, 10 MHz bandwidth, TDD duplex mode
2	NR 30 kHz SRS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.4.6.5.1.2 Test Parameters

Two cells are deployed in the test, which are E-UTRAN PCell (Cell 1) and FR1 PSCell (Cell 2). The test parameters for PSCell is given in Table A.4.6.5.1.2-1 and A.4.6.5.1.2-2 below and applicability for the E-UTRAN cell are defined in A.3.7.2. In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event I1 is used. The test consists of two successive time periods, with time duration of T1 and T2, respectively.

During the test, the test system transmits SRS resource for measurement in the DL slot according to the SRS configuration in Table A.4.6.5.1.2-4 and the test parameters for the (virtual) neighbour cell UE in Table A.4.6.5.1.2-3. During the test, the test system does not transmit PDCCH/PDSCH/OCNG on SRS symbol to be transmitted and on 1 data symbol before SRS to be transmitted.

Table A.4.6.5.1.2-1: General test parameters for SRS-RSRP event triggered reporting for PSCell in FR1

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2	E-UTRAN Cell 1 and NR Cell 2	
RF Channel Number		1, 2	1: Cell 1 2: Cell 2	
SSB configuration		1	SSB.1 FR1	
		2	SSB.2 FR1	
SMTC configuration		1	SMTC.1	
		2	SMTC.1	
SRS configuration		1	SRSConf.1	Table A.4.6.5.1.2-3
		2	SRSConf.2	
CP length		1, 2	Normal	
i1-Threshold	dBm	1	-97	
		2	-95	
Hysteresis	dB	1, 2	0	
Time To Trigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX		1, 2	OFF	Non-DRX
Time offset between DL from serving cell and SRS from test system	μs	1,2	17.67	
T1	s	1, 2	5	
T2	s	1, 2	1	

Table A.4.6.5.1.2-2: NR Cell specific test parameters for SRS-RSRP event triggered reporting for PSCell in FR1

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
TDD configuration		1	TDDConf.1.1	
		2	TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 TDD	
		2	SR.2.1 TDD	
RMSI CORESET RMC configuration		1	CR.1.1 TDD	
		2	CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 TDD	
		2	CCR.2.1 TDD	
OCNG Patterns		1, 2	OP.1	
TRS Configuration		1	TRS.1.1 TDD	
		2	TRS.1.2 TDD	
Initial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1	

Active DL BWP configuration		1, 2	DLBWP.1.1
Active UL BWP configuration		1, 2	ULBWP.1.1
N_{oc} Note 2	dBm/15 kHz	1	-98
		2	
N_{oc} Note 2	dBm/SCS	1	-98
		2	-95
Propagation Condition		1, 2	AWGN

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Table A.4.6.5.1.2-3: NR Cell specific test parameters for SRS-RSRP event triggered reporting for neighbour cell UE

Parameter	Unit	Test configuration	Neighbour cell UE	
			T1	T2
N_{oc} Note 2	dBm/15 kHz	1	-98	
		2		
N_{oc} Note 2	dBm/SCS	1	-98	
		2	-95	
$\hat{E}_s/I_{ot}$	dB	1	-infinity	4
		2		
$\hat{E}_s/N_{oc}$	dB	1	-infinity	4
		2		
SRS-RSRP Note 3	dBm/SCS kHz	1	-infinity	-94
		2	-infinity	-91
Io	dBm/9.36 MHz	1	-70.05	-64.59
	dBm/38.16 MHz	2	-63.96	-58.50
Propagation Condition		1, 2	AWGN	

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SRS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.4.6.5.1.2-4: SRS configuration for measurement reporting

	Field	SRSConf.1	SRSConf.2	Comments
SRS-ResourceSet	srs-ResourceSetId	0	0	
	srs-ResourceIdList	0	0	
	resourceType	Periodic	Periodic	
	Usage	Codebook	Codebook	
SRS-Resource	SRS-ResourceId	0	0	
	nrofSRS-Ports	Port1	Port1	
	transmissionComb	n2	n2	

	combOffset-n2	0	0	
	cyclicShift-n2	0	0	
	resourceMapping startPosition	0	0	
	resourceMapping nrofSymbols	n1	n1	
	resourceMapping repetitionFactor	n1	n1	
	freqDomainPosition	0	0	
	freqDomainShift	0	0	
	freqHopping c-SRS	12	12	
	freqHopping b-SRS	0	0	
	freqHopping b-hop	0	0	
	groupOrSequenceHopping	Neither	Neither	
	resourceType	Periodic	Periodic	
	periodicityAndOffset	sl20, 9	sl40, 19	
	sequenceId	0	0	Any 10 bit number

A.4.6.5.1.3 Test Requirements

The UE shall send one Event I1 triggered measurement report, with a measurement reporting delay less than 60 ms from the beginning of time period T2.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.5.2 CLI-RSSI measurement with non-DRX

A.4.6.5.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of CLI-RSSI measurement. This test will verify the CLI-RSSI measurement requirements in clause 9.7.3.5 with the testing configurations for NR cells in Table A.4.6.5.2.1-1.

Table A.4.6.5.2.1-1: Applicable NR configurations for FR1 CLI-RSSI test

Configuration	Description
1	NR 15 kHz SCS, 10 MHz bandwidth, TDD duplex mode
2	NR 30 kHz SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.4.6.5.2.2 Test Parameters

Two cells are deployed in the test, which are E-UTRAN PCell (Cell 1) and FR1 PSCell (Cell 2). The test parameters for PSCell is given in Table A.4.6.5.2.2-1 and A.4.6.5.2.2-2 below and applicability for the E-UTRAN cell are defined in A.3.7.2. In the measurement control information, a measurement object is configured for the frequency of the

PSCell, and it is indicated to the UE that event-triggered reporting with Event I1 is used. The test consists of two successive time periods, with time duration of T1 and T2, respectively.

During the test, the test system does not transmit PDCCH/PDSCH/OCNG on symbols for CLI-RSSI measurement resource and on 1 data symbol before. The CLI-RSSI measurement resource configuration is in Table A.4.6.5.2.2-3.

Table A.4.6.5.2.2-1: General test parameters for CLI-RSSI event triggered reporting for PSCell in FR1

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2	E-UTRAN Cell 1 and NR Cell 2	
RF Channel Number		1, 2	1: Cell 1 2: Cell 2	
SSB configuration		1	SSB.1 FR1	
		2	SSB.2 FR1	
SMTC configuration		1	SMTC.1	
		2	SMTC.1	
CLI-RSSI configuration		1	CLI-RSSIConf.1	Table A.4.6.5.2.2-3
		2	CLI-RSSIConf.2	
CP length		1, 2	Normal	
i1-Threshold	dBm	1	-93	
		2	-93	
Hysteresis	dB	1, 2	0	
Time To Trigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX		1, 2	OFF	Non-DRX
Time offset between DL from serving cell and OCNG from test system	µs	1,2	17.67	
T1	s	1, 2	5	
T2	s	1, 2	1	

Table A.4.6.5.2.2-2: NR Cell specific test parameters for CLI-RSSI event triggered reporting for PSCell in FR1

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
TDD configuration		1	TDDConf.1.1	
		2	TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 TDD	
		2	SR.2.1 TDD	
RMSI CORESET RMC configuration		1	CR.1.1 TDD	
		2	CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 TDD	
		2	CCR.2.1 TDD	
OCNG Patterns Note 3		1, 2	OP.1	
TRS Configuration		1	TRS.1.1 TDD	
		2	TRS.1.2 TDD	
Initial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2	DLBWP.1.1	
Active UL BWP configuration		1, 2	ULBWP.1.1	
N_{oc} on CLI-RSSI measurement resource Note 2	dBm/15 kHz	1	-116	-108
		2		
N_{oc} on CLI-RSSI measurement resource Note 2	dBm/SCS	1	-116	-108
		2	-113	-105

Io on CLI-RSSI measurement resource	dBm/9.36 MHz	1	-88.05	-80.05
	dBm/38.16 MHz	2	-81.96	-74.00
Io on CLI-RSSI measurement resource	dBm/1.08 MHz	1	-97.43	-89.43
	dBm/1.08 MHz	2	-97.44	-89.44
Propagation Condition		1, 2	AWGN	
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: OCNG is not transmitted in the CLI-RSSI measurement resources.				

Table A.4.6.5.2.2-3: CLI-RSSI measurement resource configuration for measurement reporting

	Field	CLI-RSSIConf.1	CLI-RSSIConf.2
RSSI-Resource	rssi-ResourceId	0	0
	rssi-SCS	15	30
	startPRB	0	0
	nrofPRBs	52	106
	startPosition	3	3
	nrofSymbols	11	11
	rssi-PeriodicityAndOffset	sl20, 9	sl40, 19

A.4.6.5.2.3 Test Requirements

The UE shall send one Event I1 triggered measurement report, with a measurement reporting delay less than 20 ms from the beginning of time period T2. The nominal RSSI used to evaluate the requirement shall be based on Io.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.6 Measurements with autonomous gaps

A.4.6.6.1 EN-DC-intra-frequency CGI identification of NR FR1 cell with autonomous gaps in synchronous EN-DC

A.4.6.6.1.1 Test Purpose and Environment

The purpose of this test is to verify the requirements for intra-frequency identification of a new CGI of NR FR1 cell with autonomous gaps in clause 8.1.2.4.27 and 8.1.2.4.28 in 36.133 [15] for EN-DC.

The test scenario comprises of one E-UTRA carrier and one NR FR1 carrier. Three cells are deployed in the test, which are E-UTRAN PCell (Cell 1) on E-UTRA RF channel 1, NR FR1 PSCell (Cell 2) and NR FR1 neighbour cell (Cell 3) on NR RF channel 1. The supported test configurations are shown in table A.4.6.6.1.1-1 below. The test parameters for NR Cells are given in Table A.4.6.6.1.2-2, A.4.6.6.1.2-3 below. The test parameters and applicability for the E-UTRAN PCell are defined in A.3.7.2.1. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE does not have any timing information of Cell 3. Starting T2, Cell 3 becomes detectable and the UE is expected to detect and send a measurement report.

A RRC message implying SI reading shall be sent to the UE during period T2, after the UE has reported Event A3. The RRC message shall create a measurement report configuration with purpose *reportCGI* which *cellForWhichToReportCGI* set to the physical cell identity of Cell 3. The start of T3 is the instant when the last TTI containing the RRC message implying SI reading of the neighbour cell (Cell 3) using autonomous gap is sent to the UE.

Table A.4.6.6.1.1-1: intra-frequency CGI identification of NR FR1 cell with autonomous gaps in synchronous EN-DC

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: target NR Cell 3 has the same SCS, BW and duplex mode as NR serving Cell 2	

Table A.4.6.6.1.1-2: General test parameters for intra-frequency CGI identification of NR FR1 cell with autonomous gaps in synchronous EN-DC

Parameter	Unit	Test configuration	Value	Comment
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1	One E-UTRAN radio channel is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1	One NR FR1 radio channel is used.
Active cell		Config 1,2,3,4,5,6	LTE Cell 1 (PCell) and NR Cell 2 (PScell)	LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4,5,6	NR Cell 3	NR Cell 3 is on NR RF channel number 1.
A3-Offset	dB	Config 1,2,3,4,5,6	-4.5	
Hysteresis	dB	Config 1,2,3,4,5,6	0	
CP length		Config 1,2,3,4,5,6	Normal	
TimeToTrigger	s	Config 1,2,3,4,5,6	0	
Filter coefficient		Config 1,2,3,4,5,6	0	L3 filtering is not used
DRX		Config 1,2,3,4,5,6	OFF	DRX is not used
Time offset between PCell and PSCell		Config 1,2,3,4,5,6	3 μs	Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,4	3 ms	Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		Config 2,3,5,6	3 μs	Synchronous cells.
T1	s	Config 1,2,3,4,5,6	5	
T2	s	Config 1,2,3,4,5,6	≤10	
T3	s	Config 1,2,3,4,5,6	5	

Table A.4.6.6.1.1-3: Cell specific test parameters for intra-frequency CGI identification of NR FR1 cell with autonomous gaps in synchronous EN-DC

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
Duplex mode		Config 1,4	FDD			
		Config 2,3,5,6	TDD			
$BW_{channel}$	MHz	Config 1,4	10: $N_{RB,c}$ = 52			
		Config 2,5	10: $N_{RB,c}$ = 52			
		Config 3,6	40: $N_{RB,c}$ = 106			
BWP BW	MHz	Config 1,4	10: $N_{RB,c}$ = 52			
		Config 2,5	10: $N_{RB,c}$ = 52			
		Config 3,6	40: $N_{RB,c}$ = 106			
TDD configuration		Config 1,4	N/A		N/A	
		Config 2,5	TDDConf.1.1		TDDConf.1.1	
		Config 3,6	TDDConf.2.1		TDDConf.2.1	
Initial DL BWP		Config 1,2,3,4,5,6	DLBWP.0.1		NA	
Initial UL BWP		Config 1,2,3,4,5,6	ULBWP.0.1		NA	
Dedicated DL BWP		Config 1,2,3,4,5,6	DLBWP.1.1		NA	
Dedicated UL BWP		Config 1,2,3,4,5,6	ULBWP.1.1		NA	
TRS configuration		Config 1,4	TRS.1.1 FDD		NA	
		Config 2,5	TRS.1.1 TDD			
		Config 3,6	TRS.1.2 TDD			
OCNG Patterns defined in A.3.2.1.1 (OP.1)		Config 1,2,3,4,5,6	OP.1		OP.1	
PDSCH Reference measurement channel		Config 1,4	SR.1.1 FDD		NA	
		Config 2,5	SR.1.1 TDD			
		Config 3,6	SR2.1 TDD			
RMSI CORESET Reference Channel		Config 1,4	CR.1.1 FDD		NA	
		Config 2,5	CR.1.1 TDD		NA	
		Config 3,6	CR2.1 TDD		NA	
RMC CORESET Reference Channel		1, 4	CCR.1.1 FDD		NA	
		2, 5	CCR.1.1 TDD		NA	
		3, 6	CCR.2.1 TDD		NA	
SSB parameters		Config 1,2,4,5	SSB.1 FR1			
		Config 3,6	SSB.2 FR1			
SMTC configuration defined in A.3.11		Config 1,4	SMTC.2			
		Config 2,3,5,6	SMTC.1			
RMSI scheduling periodicity	ms	Config 1,2,3,4,5,6	20ms			
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2,4,5	15			
		Config 3,6	30			
RLM-RS		Config 1,2,3,4,5,6	SSB		SSB	
EPRE ratio of PSS to SSS		Config 1,2,3,4,5,6	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						

EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15 kHz		-98		-98	
N_{oc} Note2	dBm/SCS	Config 1,2,4,5	-98		-98	
		Config 3,6	-95		-95	
SS-RSRP Note 3	dBm/SCS	Config 1,2,4,5	-94	-94	-Infinity	-94
		Config 3,6	-91	-91	-Infinity	-91
$\hat{E}_s / I_{ot}$	dB	Config 1,2,3,4,5,6	4	-1.46	-Infinity	-1.46
$\hat{E}_s / N_{oc}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	4
Io Note3	dBm/9.36MHz	Config 1,2,4,5	-64.60	-62.25	-64.60	-62.25
	dBm/38.16MHz	Config 3,6	-58.50	-56.16	-58.50	-56.16
Propagation Condition		Config 1,2,3,4,5,6	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.4.6.6.1.2 Test Requirements

The UE shall transmit a measurement report containing the cell global identifier of Cell 3 within 257 ms from the start of T3.

Test requirement = RRC Procedure delay + $T_{identify_CGI_NR}$ + reporting delay

= 15 + 240 + 2

= 257 ms, allow 260ms.

The UE shall be scheduled continuously throughout the test, and from the start of T3 until 257 ms the number of interrupted slots shall not exceed the allowed number specified in 8.2.1.2.16 .

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.7 L1-SINR measurement for beam reporting

A.4.6.7.1 L1-SINR measurement with CSI-RS based CMR and no dedicated IMR when DRX is not used

A.4.6.7.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-SINR measurement based on CSI-RS CMR without dedicated IMR. This test will partly verify the L1-SINR measurement requirements in clause 9.8.4.1, with the testing configurations for NR cells in Table A.4.6.7.1.1-1.

Table A.4.6.7.1.1-1: Applicable NR configurations for FR1 CSI-RS based L1-SINR test

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.4.6.7.1.2 Test parameters

There are two cells in the test, E-UTRAN PCell (Cell 1) and FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.4.6.7.1.2-1 and Table A.4.6.7.1.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-SINR measurement on the CSI-RS and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-SINR on aperiodic CSI-RS resources. After 80ms from the beginning of the test, the DCI trigger comes in slot n (1 Config 1,2,4,5 and 8 for Config 3,6) of a frame and UE provides the report back based on the reporting configuration as defined in Table A.4.6.7.1.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs.

Table A.4.6.7.1.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~6		freq1
Duplex mode	1,4		FDD
	2,5		TDD
	3,6		TDD
TDD Configuration	1,4		N/A
	2,5		TDDConf.1.1
	3,6		TDDConf.2.1
$BW_{channel}$	1,4	MHz	10: $N_{RB,c}$ = 52
	2,5		10: $N_{RB,c}$ = 52
	3,6		40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2,5		SR.1.1 TDD
	3,6		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2,5		CR.1.1 TDD

	3,6		CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD
	2,5		CCR.1.1 TDD
	3,6		CCR.2.1 TDD
SSB configuration	1,4		SSB.3 FR1
	2,5		SSB.3 FR1
	3,6		SSB.4 FR1
CSI-RS configuration	1,4		CSI-RS.1.3 FDD
	2,5		CSI-RS.1.3 TDD
	3,6		CSI-RS.2.3 TDD
OCNG Patterns	1~6		OP.1
TRS Configuration	1,4		TRS.1.1 FDD
	2,5		TRS.1.1 TDD
	3,6		TRS.1.2 TDD
Initial BWP Configuration	1~6		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~6		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~6		SMTC.1
DRX configuration	1~6		Off
reportConfigType	1~6		aperiodic
reportQuantity-r16	1~6		cri-SINR-r16
Number of reported RS	1~6		2
qcl-Info	1~6		SSB#0 for resource#0
			SSB#1 for resource#1
reportSlotOffsetList	1~6	slots	26
T1	1~6	s	5
EPRE ratio of PSS to SSS	1~6	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~6		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.4.6.7.1.2-2: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
N_{oc} Note1	1~6	dBm/15kHz	-94.65	
N_{oc} Note1	1,2,4,5	dBm/SSB SCS	-94.65	
	3,6		-91.65	
$\hat{E}_s / I_{ot}$	1~6	dB		3

			0	
CSI-RS RSRP Note3	1,2,4,5	dBm/SSB SCS	-94.65	-91.65
	3,6		-91.65	-88.65
Io Note2	1,2,4,5	dBm/9.36 MHz	-63.69	-61.93
	3,6	dBm/38.16 MHz	-57.59	-55.84
$\hat{E}_s / N_{oc}$	1~6	dB	0	3
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

A.4.6.7.1.3 Test Requirements

After 80ms from the beginning of the test, the UE shall send L1-SINR report at slot 26 from the reception of DCI triggering the L1-SINR measurement. The L1-SINR report shall include the results for both CSI-RS#0 and CSI-RS#1 while meeting the absolute accuracy requirement in clause 10.1.27.1.1 and relative accuracy requirement in clause 10.1.27.1.2.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.7.2 L1-SINR measurement with SSB based CMR and dedicated IMR when DRX is used

A.4.6.7.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-SINR measurement. This test will partly verify the L1-SINR measurement requirements with SSB based CMR and CSI-IM based IMR in clause 9.8.4.2, with the testing configurations for NR cells in Table A.4.6.7.2.1-1.

Table A.4.6.7.2.1-1: Applicable NR configurations for FR1 L1-SINR measurement test with SSB based CMR and CSI-IM based IMR

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.4.6.7.2.2 Test parameters

There are two cells in the test, E-UTRAN PCell (Cell 1) and FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.4.6.7.2.2-1 and Table A.4.6.7.2.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-SINR measurement on the SSBs and the associated CSI-IM resources, and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD measurements based on the SSBs, and UE is configured to perform L1-SINR measurement based on the SSBs as CMR and the CSI-IM resources as IMR.

Table A.4.6.7.2.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~6		freq1
Duplex mode	1,4		FDD
	2,5		TDD
	3,6		TDD
TDD Configuration	1,4		N/A
	2,5		TDDConf.1.1
	3,6		TDDConf.2.1
$BW_{channel}$	1,4	MHz	10: $N_{RB,c}$ = 52
	2,5		10: $N_{RB,c}$ = 52
	3,6		40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2,5		SR.1.1 TDD
	3,6		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2,5		CR.1.1 TDD
	3,6		CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD
	2,5		CCR.1.1 TDD
	3,6		CCR.2.1 TDD
SSB configuration	1,4		SSB.3 FR1
	2,5		SSB.3 FR1
	3,6		SSB.4 FR1
CSI-IM configuration	1,4		CSI-IM.1.1 FDD
	2,5		CSI-IM.1.1 TDD
	3,6		CSI-IM.2.1 TDD
OCNG Patterns	1~6		OP.1
Initial BWP Configuration	1~6		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~6		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~6		SMTC.1
TRS Configuration	1,4		TRS.1.1 FDD
	2,5		TRS.1.1 TDD
	3,6		TRS.1.2 TDD
DRX configuration	1~6		DRX.3
reportConfigType	1~6		periodic

reportQuantity-r16	1~6		ssb-Index-SINR-r16
Number of reported RS	1~6		2
L1-SINR reporting period	1~6	slot	80
T1	1~6	s	5
T2	1~6	s	1
EPRE ratio of PSS to SSS	1~6	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~6		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.4.6.7.2.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
N_{oc} Note2	1~6	dBm/15kHz	-94.65			
N_{oc} Note2	1,2,4,5	dBm/SSB SCS	-94.65			
	3,6		-91.65			
$\hat{E}_s / I_{ot}$	1~6	dB	0	0	-Infinity	3
SS-RSRP Note3	1,2,4,5	dBm/SSB SCS	-94.65	-94.65	-Infinity	-91.65
	3,6		-91.65	-91.65	-Infinity	-88.65
Io Note3	1,2,4,5	dBm/9.36 MHz	-63.69	-63.69	-66.70	-61.93
	3,6	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.84
$\hat{E}_s / N_{oc}$	1~6	dB	0	0	-Infinity	3

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.4.6.7.2.3 Test Requirements

The UE shall send L1-SINR report every 80 slots. No later than 640ms plus 80 slots from the beginning of time period T2, UE shall send L1-SINR report including results of both SSB#0+CSI-IM#0 and SSB#1+CSI-IM#1 while meeting the accuracy requirement in clause 10.1.27.2. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.7.3 L1-SINR measurement with CSI-RS based CMR and dedicated IMR configured when DRX is used

A.4.6.7.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-SINR measurement. This test will partly verify the L1-SINR measurement requirements with CSI-RS based CMR and dedicated IMR cofigured in clause 9.8.4.3, with the testing configurations for NR cells in Table A.4.6.7.3.1-1.

Table A. A.4.6.7.3.1-1: Applicable NR configurations for FR1 L1-SINR test with CMR and dedicated IMR

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.4.6.7.3.2 Test parameters

There are two cells in the test, E-UTRAN PCell (Cell 1) and FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.4.6.7.3.2-1 and Table A.4.6.7.3.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-SINR measurement on the configured CSI-RS as CMR and an associated CSI-RS as IMR, and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-SINR on aperiodic CSI-RS resources and the associated IMR. After 80ms from the beginning of the test, the DCI trigger comes in slot n (1 Config 1,2,4,5 and 8 for Config 3,6) of a frame and UE provides the report back based on the reporting configuration as defined in Table A.4.6.7.3.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs, and UE is configured to perform L1-SINR measurement based on the CSI-RS as CMR and the CSI-RS as IMR.

Table A.4.6.7.3.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~6		freq1
Duplex mode	1,4		FDD
	2,5		TDD
	3,6		TDD
TDD Configuration	1,4		N/A

	2,5		TDDConf.1.1
	3,6		TDDConf.2.1
$BW_{channel}$	1,4	MHz	10: $N_{RB,c}$ = 52
	2,5		10: $N_{RB,c}$ = 52
	3,6		40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2,5		SR.1.1 TDD
	3,6		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2,5		CR.1.1 TDD
	3,6		CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD
	2,5		CCR.1.1 TDD
	3,6		CCR.2.1 TDD
SSB configuration	1,4		SSB.3 FR1
	2,5		SSB.3 FR1
	3,6		SSB.4 FR1
CSI-RS configuration as CMR	1,4		CSI-RS.1.3 FDD
	2,5		CSI-RS.1.3 TDD
	3,6		CSI-RS.2.3 TDD
CSI-RS configuration as IMR	1,4		CSI-RS.1.2A FDD
	2,5		CSI-RS.1.2A TDD
	3,6		CSI-RS.2.2A TDD
OCNG Patterns	1~6		OP.1
TRS Configuration	1,4		TRS.1.1 FDD
	2,5		TRS.1.1 TDD
	3,6		TRS.1.2 TDD
Initial BWP Configuration	1~6		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~6		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~6		SMTC.1
DRX configuration	1~6		DRX.3
reportConfigType	1~6		aperiodic
reportQuantity-r16	1~6		cri-SINR-r16
Number of reported RS	1~6		2
qcl-Info	1~6		SSB#0 for resource#0
			SSB#1 for resource#1
reportSlotOffsetList	1~6	slots	26
T1	1~6	s	5
EPRE ratio of PSS to SSS	1~6	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~6		AWGN

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Table A.4.6.7.3.2-2: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
N_{oc} Note1	1~6	dBm/15kHz	-94.65	
N_{oc} Note1	1,2,4,5	dBm/SSB SCS	-94.65	
	3,6		-91.65	
$\hat{E}_s / I_{ot}$	1~6	dB	0	3
$\hat{E}_s / N_{oc}$	1~6	dB	0	3
CSI-RS RSRP Note2	1,2,4,5	dBm/SSB SCS	-94.65	-91.65
	3,6		-91.65	-88.65
Io Note2	1,2,4,5	dBm/9.36 MHz	-63.69	-61.93
	3,6	dBm/38.16 MHz	-57.59	-55.84
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 2: CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

A.4.6.7.3.3 Test Requirements

After 80ms from the beginning of the test, the UE shall send L1-SINR report at slot 26 from the reception of DCI triggering the L1-SINR measurement. The L1-SINR report shall include the results for both CSI-RS#0 as CMR + CSI-RS#0 as IMR and CSI-RS#1 as CMR + CSI-RS#1 as IMR while meeting the accuracy requirement in clause 10.1.27.3.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.8 CSI-RS based intra-frequency Measurement

A.4.6.8.1 EN-DC event triggered reporting tests without gap under DRX

A.4.6.8.1.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the CSI-RS based L3 intra-frequency requirements in clause 9.10.2.

Three cells are deployed in the test, which are E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and a FR1 neighbour cell (Cell 3) on the same frequency as the PSCell. The test parameters for PSCell are given in Table A.4.6.8.1.1-1, A.4.6.8.1.1-2, A.4.6.8.1.1-3 and A.4.6.8.1.1-4 below and the test parameters and applicability for the E-UTRAN cell are defined in A.3.7.2. In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used for the CSI-RS based L3 intra-frequency measurements. The test consists of two successive time periods, with time

duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 3.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.4.6.8.1.1-1: Supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: Target NR Cell 3 has the same SCS, BW and duplex mode as NR serving Cell 2	

Table A.4.6.8.1.1-2: General test parameters for EN-DC intra-frequency event triggered reporting without gap for PSCell in FR1 with DRX

Parameter	Unit	Test configuration	Value Test 1	Comment
Active cell		1, 2, 3, 4, 5, 6	E-UTRAN Cell 1 and NR Cell 2	
Neighbour cell		1, 2, 3, 4, 5, 6	NR Cell 3	Cell to be identified.
RF Channel Number		1, 2, 3, 4, 5, 6	1: Cell 1 2: Cell 2 and Cell 3	
SMTC configuration		1, 4	SMTC.2	
		2, 5	SMTC.1	
		3, 6	SMTC.1	
A3-Offset	dB	1, 2, 3, 4, 5, 6	-4.5	
CP length		1, 2, 3, 4, 5, 6	Normal	
Hysteresis	dB	1, 2, 3, 4, 5, 6	0	
Time To Trigger	s	1, 2, 3, 4, 5, 6	0	
Filter coefficient		1, 2, 3, 4, 5, 6	0	L3 filtering is not used
DRX		1, 2, 3, 4, 5, 6	DRX.5	
Time offset between PCell and PSCell	μs	1, 2, 3, 4, 5, 6	3	Synchronous EN-DC
Time offset between serving and neighbour cells	μs	1, 4	4.7	Asynchronous cells. The timing of Cell 3 is CP later than the timing of Cell 2.
		2, 5	4.7	Synchronous cells
		3, 6	2.35	Synchronous cells
T1	s	1, 2, 3, 4, 5, 6	5	
T2	s	1, 2, 3, 4, 5, 6	7	

Table A.4.6.8.1.1-3: NR Cell specific test parameters for EN-DC intra-frequency event triggered reporting without gap for PSCell in FR1 with DRX

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
TDD configuration		1, 4	N/A		N/A	
		2, 5	TDDConf.1.1		TDDConf.1.1	
		3, 6	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD		N/A	
		2, 5	SR.1.1 TDD			
		3, 6	SR.2.1 TDD			
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD		CR.1.1 FDD	
		2, 5	CR.1.1 TDD		CR.1.1 TDD	
		3, 6	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD		CCR.1.1 FDD	
		2, 5	CCR.1.1 TDD		CCR.1.1 TDD	
		3, 6	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns		1, 2, 3, 4, 5, 6	OP.1		OP.1	
TRS configuration		1, 4	TRS.1.1 FDD		N/A	
		2, 5	TRS.1.1 TDD		N/A	
		3, 6	TRS.1.2 TDD		N/A	
Initial BWP configuration		1, 2, 3, 4, 5, 6	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3, 4, 5, 6	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3, 4, 5, 6	ULBWP.1.1		ULBWP.1.1	
SSB parameters		1,4	SSB.1 FR1		SSB.5 FR1	
		2,5	SSB.1 FR1		SSB.5 FR1	
		3,6	SSB.2 FR1		SSB.6 FR1	
CSI-RS configuration for RRM		1,4	CSI-RS.RRM.FR1.1 FDD			
		2,5	CSI-RS.RRM.FR1.1 TDD			
		3,6	CSI-RS.RRM.FR1.2 TDD			
RLM-RS		1, 2, 3, 4, 5, 6	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1,2,4,5	-98			
		3, 6	-95			
N_{oc} Note 2	dBm/15 kHz	1, 2, 3, 4, 5, 6	-98			
$\hat{E}_s/I_{ot}$ for SSB	dB	1, 2, 3, 4, 5, 6	4	-1.46	-Infinity	-1.46
$\hat{E}_s/I_{ot}$ for CSI-RS	dB	1, 2, 3, 4, 5, 6	4	-1.46	-Infinity	-1.46
$\hat{E}_s/N_{oc}$ for SSB	dB	1, 2, 3, 4, 5, 6	4	4	-Infinity	4
$\hat{E}_s/N_{oc}$ for CSI-RS	dB	1, 2, 3, 4, 5, 6	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS kHz	1, 4	-94	-94	-Infinity	-94
		2, 5	-94	-94	-Infinity	-94
		3, 6	-91	-91	-Infinity	-91
CSI-RSRP Note 3	dBm/SCS kHz	1, 4	-94	-94	-Infinity	-94

		2, 5	-94	-94	-Infinity	-94
		3, 6	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1, 4	-64.60	-62.25	-64.60	-62.25
	dBm/9.36 MHz	2, 5	-64.60	-62.25	-64.60	-62.25
	dBm/38.16 MHz	3	-58.50	-56.16	-58.50	-56.16
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and CSI-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.4.6.8.1.2 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 9280 ms from the beginning of time period T2. The UE is not required to read the SSB index indicated by associatedSSB in the neighbour cell in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.9 CSI-RS based inter-frequency Measurement

A.4.6.9.1 EN-DC event triggered reporting tests for FR1 cell when non-DRX is used

A.4.6.9.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell measurement requirements in clause 9.10.3.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 on NR RF channel 2. The test parameters and configurations are given in Tables A.4.6.9.1.1-1, A.4.6.9.1.1-2, and A.4.6.9.1.1-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table A.4.6.9.1.1-2 is provided for a UE that does not support per-FR gap and in test 3&4 measurement gap pattern configuration #4 as defined in Table A.4.6.2.2.1-2 is provided for UE that support per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 3&4. Otherwise it is only required to pass test 1&2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.1-1. Supported test configurations are shown in table A.4.6.9.1.1-1.

Table A.4.6.9.1.1-1: EN-DC event triggered reporting tests with SSB index reading for FR1-FR1

Config	Description
1	LTE FDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode

3	LTE FDD, NR 30 kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: target NR cell3 has the same SCS, BW and duplex mode as NR serving cell2	

Table A.4.6.9.1.1-2: General test parameters for EN-DC inter-frequency event triggered reporting

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1		One E-UTRAN TDD carrier frequencies is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1, 2		Two FR1 NR carrier frequencies are used.
Active cell		Config 1,2,3,4,5,6	LTE Cell 1 (PCell) and NR cell 2 (PScell)		LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4,5,6	NR cell 3		NR cell 3 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4,5,6	0	4	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4,5,6	39	19	
A3-Offset	dB	Config 1,2,3,4,5,6	-6		
Hysteresis	dB	Config 1,2,3,4,5,6	0		
CP length		Config 1,2,3,4,5,6	Normal		
TimeToTrigger	s	Config 1,2,3,4,5,6	0		
Filter coefficient		Config 1,2,3,4,5,6	0		L3 filtering is not used
DRX	ms	Config 1,2,3,4,5,6	OFF		DRX is not used
Time offset between PCell and PSCell	µs	Config 1,2,3,4,5,6	3		Synchronous EN-DC
Time offset between serving and neighbour cells	µs	Config 1,4	4.7		Asynchronous cells. The timing of Cell 3 is CP later than the timing of Cell 2.
		Config 2,5	4.7		Synchronous EN-DC
		Config 3,6	2.35		Synchronous EN-DC
T1	s	Config 1,2,3,4,5,6	5		
T2	s	Config 1,2,3,4,5,6	1.1	1.1	

Table A.4.6.9.1.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
NR RF Channel Number		Config 1,2,3,4,5,6	1		2	

Duplex mode		Config 1,4	FDD	
		Config 2,3,5,6	TDD	
$BW_{channel}$	MHz	Config 1,4	10: $N_{RB,c}$ = 52	
		Config 2,5	10: $N_{RB,c}$ = 52	
		Config 3,6	40: $N_{RB,c}$ = 106	
BWP BW	MHz	Config 1,4	10: $N_{RB,c}$ = 52	
		Config 2,5	10: $N_{RB,c}$ = 52	
		Config 3,6	40: $N_{RB,c}$ = 106	
TDD configuration		Config 2,5	TDDConf.1.1	
		Config 3,6	TDDConf.2.1	
Initial DL BWP		Config 1,2,3,4,5,6	DLBWP.0.1	NA
Initial UL BWP		Config 1,2,3,4,5,6	ULBWP.0.1	NA
Dedicated DL BWP		Config 1,2,3,4,5,6	DLBWP.1.1	NA
Dedicated UL BWP		Config 1,2,3,4,5,6	ULBWP.1.1	NA
TRS configuration		Config 1,4	TRS.1.1 FDD	NA
		Config 2,5	TRS.1.1 TDD	NA
		Config 3,6	TRS.1.2 TDD	NA
OCNG Patterns defined in A.3.2.1.1 (OP.1)		Config 1,2,3,4,5,6	OP.1	OP.1
PDSCH Reference measurement channel		Config 1,4	SR.1.1 FDD	-
		Config 2,5	SR.1.1 TDD	
		Config 3,6	SR. 2.1 TDD	
CORESET Reference Channel		Config 1,4	CR.1.1 FDD	-
		Config 2,5	CR.1.1 TDD	
		Config 3,6	CR.2.1 TDD	
SSB parameters		Config 1,4	SSB.1 FR1	SSB.5 FR1
		Config 2,5	SSB.1 FR1	SSB.5 FR1
		Config 3,6	SSB.2 FR1	SSB.6 FR1
SMTC configuration		Config 1,4	SMTC.2	
		Config 2,3,5,6	SMTC.1	
CSI-RS configuration for RRM		Config 1,4	CSI-RS.RRM.FR1.1 FDD	
		Config 2,5	CSI-RS.RRM.FR1.1 TDD	
		Config 3,6	CSI-RS.RRM.FR1.2 TDD	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2,4,5	15	
		Config 3,6	30	
EPRE ratio of PSS to SSS		Config 1,2,3,4,5,6	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				

EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15kHz		-98		-98	
N_{oc} Note2	dBm/SCS	Config 1,2,4,5	-98		-98	
		Config 3,6	-95		-95	
SS-RSRP Note 3	dBm/SCS	Config 1,2,4,5	-94	-94	-Infinity	-91
		Config 3,6	-91	-91	-Infinity	-88
CSI-RSRP Note 3	dBm/SCS	Config 1,2,4,5	-94	-94	-Infinity	-91
		Config 3,6	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
Io Note3	dBm/9.36 MHz	Config 1,2,4,5	-64.59	-64.59	-70.05	-62.26
	dBm/38.16 MHz	Config 3,6	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3,4,5,6	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP, CSI-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.4.6.9.1.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1040 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2 UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to 2xTTIDCCH higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.7 Measurement Performance requirements

Unless explicitly stated otherwise:

- Reported measurements shall be within defined range of accuracy limits defined in Clause 10 for at least 90 % of the reported cases. If multiple measurement performance requirements are verified in the same test,

the reported measurements for each requirement shall be within defined range of accuracy limits of the corresponding requirement defined in Clause 10 for at least 90% of the reported cases.

- Measurements are performed in RRC_CONNECTED state.
- The reference channels assume transmission of PDSCH with a maximum number of 5 HARQ transmissions unless otherwise specified.

A.4.7.1 SS-RSRP

A.4.7.1.1 EN-DC Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.4.7.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 10.1.2.1.1 and 10.1.2.1.2 for intra-frequency measurements.

A.4.7.1.1.2 Test parameters

In this set of test cases all NR cells are on the same carrier frequency. Supported test configurations are shown in table A.4.7.1.1.2-1. Both absolute and relative accuracy of SS-RSRP intra-frequency measurements are tested by using the parameters in A.4.7.1.1.2-2. The configuration of cell 1 (E-UTRA PCell) is specified in clause A.3.7.2.1 In all test cases, Cell 2 is the PSCell, and Cell 3 is the target cell.

Table A.4.7.1.1.2-1: SS-RSRP Intra frequency SS-RSRP supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations for each supported band	

Table A.4.7.1.1.2-2: SS-RSRP Intra frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 2	Cell 3	Cell 2	Cell 3	Cell 2	Cell 3
Physical cell ID			489	0	489	0	489	0
SSB ARFCN			freq1		freq1		freq1	
Duplex mode	Config 1,4		FDD					
	Config 2,3,5,6		TDD					
TDD configuration	Config 1,4		Not Applicable					
	Config 2,5		TDDConf.1.1					
	Config 3,6		TDDConf.2.1					
$BW_{channel}$	Config 1,4	MHz	10: $N_{RB,c}$ = 52					
	Config 2,5		10: $N_{RB,c}$ = 52					
	Config 3,6		40: $N_{RB,c}$ = 106					
Downlink initial BWP configuration			DLBWP.0.1					
Downlink dedicated BWP configuration			DLBWP.1.1					
Uplink initial BWP configuration			ULBWP.0.1					
Uplink dedicated BWP configuration			ULBWP.1.1					
TRS configuration	Config 1,4		TRS.1.1 FDD	NA	TRS.1.1 FDD	NA	TRS.1.1 FDD	NA
	Config 2,5		TRS.1.1 TDD	NA	TRS.1.1 TDD	NA	TRS.1.1 TDD	NA
	Config 3,6		TRS.1.2 TDD	NA	TRS.1.2 TDD	NA	TRS.1.2 TDD	NA

DRX Cycle			ms	Not Applicable					
PDSCH Reference measurement channel	Config 1,4			SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2,5			SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3,6			SR2.1 TDD		SR2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1,4			CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	-
	Config 2,5			CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
	Config 3,6			CR2.1 TDD		CR2.1 TDD		CR2.1 TDD	
Control Channel RMC	Config 1,4			CCR.1. 1 FDD	-	CCR.1. 1 FDD	-	CCR.1. 1 FDD	-
	Config 2,5			CCR.1. 1 TDD		CCR.1. 1 TDD		CCR.1. 1 TDD	
	Config 3,6			CCR2.1 TDD		CCR2. 1 TDD		CCR2.1 TDD	
SSB configuration	Config 1,4			SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
	Config 2,5			SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
	Config 3,6			SSB.2 FR1	SSB.2 FR1	SSB.2 FR1	SSB.2 FR1	SSB.2 FR1	SSB.2 FR1
Time offset with Cell 2	Config 1,4		ms	-	3	-	3	-	3
	Config 2,3,5,6		µs	-	3	-	3	-	3
SMTC configuration	Config 1,4			SMTC.2					
	Config 2,3,5,6			SMTC.1					
OCNG Patterns				OP.1					
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5		kHz	15 kHz					
	Config 3,6			30kHz					
EPRE ratio of PSS to SSS EPRE ratio of PBCH DMRS to SSS EPRE ratio of PBCH to PBCH DMRS EPRE ratio of PDCCH DMRS to SSS EPRE ratio of PDCCH to PDCCH DMRS EPRE ratio of PDSCH DMRS to SSS EPRE ratio of PDSCH to PDSCH EPRE ratio of OCNG DMRS to SSS(Note 1) EPRE ratio of OCNG to OCNG DMRS (Note 1)			dB	0	0	0	0	0	0
N_{oc} Note2	Config 1,2,4,5	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/15KhZ	-106		-88		-114	
		NR_FDD_FR1_B						-113.5	
		NR_TDD_FR1_C						-113	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-112.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-112	
		NR_FDD_FR1_F						-111.5	
		NR_FDD_FR1_G						-111	
		NR_FDD_FR1_H						-110.5	
	Config 3,6	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		Not applicable Note 5		-94		-114	
		NR_FDD_FR1_B						-113.5	
		NR_TDD_FR1_C						-113	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-112.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-112	
		NR_FDD_FR1_F						-111.5	
		NR_FDD_FR1_G						-111	
		NR_FDD_FR1_H						-110.5	
N_{oc} Note2	Config 1,2,4,5		dBm/SCS	-106		-88		Same as Noc/15kHz	

	Config 3,6	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		Not applicable Note 5		-91		-111	
		NR_FDD_FR1_B						-110.5	
		NR_TDD_FR1_C						-110	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-109.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-109	
		NR_FDD_FR1_F						-108.5	
		NR_FDD_FR1_G						-108	
		NR_FDD_FR1_H						-107.5	
$\hat{E}_s/I_{ot}$			dB	2.46	-5.97	2.46	-5.97	-0.01	-4.76
$\hat{E}_s/N_{oc}$			dB	6	1	6	1	3	0
SS-RSRP Note3	Config 1,2,4,5	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/SCS	-100	-105	-82	-87	-111.00	-114.00
		NR_FDD_FR1_B						-110.50	-113.50
		NR_TDD_FR1_C						-110.00	-113.00
		NR_FDD_FR1_D, NR_TDD_FR1_D						-109.50	-112.50
		NR_FDD_FR1_E, NR_TDD_FR1_E						-109.00	-112.00
		NR_FDD_FR1_F						-108.50	-111.50
		NR_FDD_FR1_G						-108.00	-111.00
		NR_FDD_FR1_H						-107.50	-110.50
	Config 3,6	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		- Not applicable Note 5	Not applicable Note 5	-85	-90	-108.00	-111.00
		NR_FDD_FR1_B						-107.50	-110.50
		NR_TDD_FR1_C						-107.00	-110.00
		NR_FDD_FR1_D, NR_TDD_FR1_D						-106.50	-109.50
		NR_FDD_FR1_E, NR_TDD_FR1_E						-106.00	-109.00
		NR_FDD_FR1_F						-105.50	-108.50
		NR_FDD_FR1_G						-105.00	-108.00
		NR_FDD_FR1_H						-104.50	-107.50
Io Note3	Config 1,2,4,5	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 9.36MHz	-70.09		-52.09		-80.03	
		NR_FDD_FR1_B						-79.53	
		NR_TDD_FR1_C						-79.03	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-78.53	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-78.03	
		NR_FDD_FR1_F						-77.53	
		NR_FDD_FR1_G						-77.03	
		NR_FDD_FR1_H						-76.53	
	Config 3,6	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 38.16MHz	Not applicable Note 5		-51.99		-73.94	
		NR_FDD_FR1_B						-73.44	
		NR_TDD_FR1_C						-72.94	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-72.44	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-71.94	
		NR_FDD_FR1_F						-71.44	
		NR_FDD_FR1_G						-70.94	
		NR_FDD_FR1_H						-70.44	
Propagation condition			-	AWGN					
Antenna configuration				1x2					

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	Subtest 1 is not used when testing with 30kHz SSB SCS
Note 6:	The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification

A.4.7.1.1.3 Test Requirements

The SS-RSRP measurement accuracy for cell 2 and cell 3 shall fulfil absolute requirement in clause 10.1.2.1.1 and relative requirement in clause 10.1.2.1.2.

A.4.7.1.2 EN-DC inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.4.7.1.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 10.1.4.1.1 and 10.1.4.1.2 for inter-frequency measurements with the testing configurations in Table A.4.7.1.2.1-1.

Table A.4.7.1.2.1-1: Applicable NR configurations for FR1 inter-frequency SS-RSRP accuracy test

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations on each supported band	

A.4.7.1.2.2 Test parameters

In this set of test cases there are three cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and a FR1 neighbour cell (Cell 3) on a different frequency than the PSCell. The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 and Cell 3 are given in Table A.4.7.1.2.2-1 below. Both absolute and relative accuracy of RSRP inter-frequency measurements are tested by using the parameters in Table A.4.7.1.2.2-1. The inter-frequency measurements are supported by a measurement gap.

Table A.4.7.1.2.2-1: SS-RSRP inter-frequency test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN	1~6		freq1	freq2	freq1	freq2
$BW_{channel}$	1,4	MHz	10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
	2,5		10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
	3,6		40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
Gap pattern ID			0		0	
Duplex mode	1,4		FDD		FDD	
	2,5		TDD		TDD	
	3,6		TDD		TDD	

TDD configuration		1,4		N/A		N/A		
		2,5		TDDConf.1.1		TDDConf.1.1		
		3,6		TDDConf.2.1		TDDConf.2.1		
PDSCH Reference measurement channel		1,4		SR.1.1 FDD	-	SR.1.1 FDD	-	
		2,5		SR.1.1 TDD		SR.1.1 TDD		
		3,6		SR.2.1 FDD		SR.2.1 FDD		
RMSI CORESET Reference Channel		1,4		CR.1.1 FDD	-	CR.1.1 FDD	-	
		2,5		CR.1.1 TDD	-	CR.1.1 TDD	-	
		3,6		CR.2.1 FDD	-	CR.2.1 FDD	-	
Dedicated CORESET Reference Channel		1,4		CCR.1.1 FDD	-	CCR.1.1 FDD	-	
		2,5		CCR.1.1 TDD	-	CCR.1.1 TDD	-	
		3,6		CCR.2.1 TDD	-	CCR.2.1 TDD	-	
SSB configuration		1,4		SSB.1 FR1		SSB.1 FR1		
		2,5		SSB.1 FR1		SSB.1 FR1		
		3,6		SSB.2 FR1		SSB.2 FR1		
OCNG Patterns		1~6		OP.1		OP.1		
TRS configuration		1,4		TRS.1.1 FDD	-	TRS.1.1 FDD	-	
		2,5		TRS.1.1 TDD		TRS.1.1 TDD		
		3,6		TRS.1.2 TDD		TRS.1.2 TDD		
Initial BWP Configuration		1~6		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1		
Dedicated BWP configuration		1~6		DLBWP.1.1 ULBWP.1.1		DLBWP.1.1 ULBWP.1.1		
Time offset with Cell 2		1,4	ms	-	3	-	3	
		2,3,5,6	μs	-	3	-	3	
SMTC configuration		1,4		SMTC.2		SMTC.2		
		2,3,5,6		SMTC.1		SMTC.1		
EPRE ratio of PSS to SSS		1~6	dB	0	0	0	0	
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH DMRS								
EPRE ratio of OCNG DMRS to SSS[Note 1]								
EPRE ratio of OCNG to OCNG DMRS[Note 1]								
N_{oc}[Note2]	NR_FDD_FR1_A, NR_TDD_FR1_A[NOTE 5],	1~6	dBm/15 kHz	-94.65		(N_{oc} for Cell 3 +8dB)	-115	
	NR_FDD_FR1_B						-114.5	
	NR_TDD_FR1_C						-114	
	NR_FDD_FR1_D, NR_TDD_FR1_D						-113.5	
	NR_FDD_FR1_E, NR_TDD_FR1_E						-113	
	NF_FDD_FR1_F						-112.5	

	NR_FDD_FR1_G						-112
	NR_FDD_FR1_H						-111.5
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5,	1,2,4,5	dBm/SSB SCS	-94.65		(N_{oc} for Cell 3 +8dB)	-115
	NR_FDD_FR1_B						-114.5
	NR_TDD_FR1_C						-114
	NR_FDD_FR1_D, NR_TDD_FR1_D						-113.5
	NR_FDD_FR1_E, NR_TDD_FR1_E						-113
	NR_FDD_FR1_F						-112.5
	NR_FDD_FR1_G						-112
	NR_FDD_FR1_H						-111.5
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5, NR_SDL_FR1_A	3,6		-91.65		(N_{oc} for C 3 +8dB)	-112.00
	NR_FDD_FR1_B						-111.50
	NR_TDD_FR1_C						-111.00
	NR_FDD_FR1_D, NR_TDD_FR1_D						-110.50
	NR_FDD_FR1_E, NR_TDD_FR1_E						-110.00
	NR_FDD_FR1_F						-110.50
	NR_FDD_FR1_G						-109.00
	NR_FDD_FR1_H						-109.50
$\hat{E}_s/I_{ot}$		1~6	dB	10	10	13	-3
SS-RSRP Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2,4,5	dBm/SCS	-84.65		(RSRP for Cell 3 +25dB)	-118.00
	NR_FDD_FR1_B						-117.50
	NR_TDD_FR1_C						-117.00
	NR_FDD_FR1_D, NR_TDD_FR1_D						-116.50
	NR_FDD_FR1_E, NR_TDD_FR1_E						-116.00
	NR_FDD_FR1_F						-115.50
	NR_FDD_FR1_G						-115.00
	NR_FDD_FR1_H						-114.50
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5,	3,6		-81.65		(RSRP for Cell 3 +25dB)	-115.00
	NR_FDD_FR1_B						-114.50
	NR_TDD_FR1_C						-114.00
	NR_FDD_FR1_D, NR_TDD_FR1_D						-113.50
	NR_FDD_FR1_E, NR_TDD_FR1_E						-113.00
	NR_FDD_FR1_F						-112.50
	NR_FDD_FR1_G						-112.00
	NR_FDD_FR1_H						-111.50
Io Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6,	1,2,4,5	dBm/9.36MHz	-56.28		(Io for Channel 3 +19.75dB)	-85.28
	NR_FDD_FR1_B						-84.78
	NR_TDD_FR1_C						-84.28
	NR_FDD_FR1_D, NR_TDD_FR1_D						-83.78
	NR_FDD_FR1_E, NR_TDD_FR1_E						-83.28
	NR_FDD_FR1_F						-82.78

	NR_FDD_FR1_G						-82.28
	NR_FDD_FR1_H						-81.78
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6,	3,6	dBm/ 38.16MHz	-50.19		(Io for Channel 3 +19.75dB)	-79.19
	NR_FDD_FR1_B						-78.69
	NR_TDD_FR1_C						-78.19
	NR_FDD_FR1_D, NR_TDD_FR1_D						-77.69
	NR_FDD_FR1_E, NR_TDD_FR1_E						-77.19
	NR_FDD_FR1_F						-76.69
	NR_FDD_FR1_G						-76.19
	NR_FDD_FR1_H						-75.69
$\hat{E}_s / N_{oc}$		1~6	dB	10	10	13	-3
Propagation condition		1~6	-	AWGN		AWGN	
Antenna configuration				1x2		1x2	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5 The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification

A.4.7.1.2.3 Test Requirements

The SS-RSRP measurement accuracy for Cell 2 and Cell 3 shall fulfil the Absolute requirement in clause 10.1.4.1.1 and Relative requirement in clause 10.1.4.1.2.

A.4.7.1.3 Void

A.4.7.2 SS-RSRQ

A.4.7.2.1 EN-DC Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.4.7.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.7.1.1.

A.4.7.2.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table A.4.7.2.1.2-1. The absolute accuracy of SS-RSRQ intra-frequency measurement is test by using the parameters in Table A.4.7.2.1.2-2. The configuration of cell 1 (E-UTRA PCell) is specified in clause A.3.7.2.1. In all test cases, Cell 2 is the PSCell and Cell 3 is the target cell.

Table A.4.7.2.1.2-1: SS-RSRQ Intra frequency SS-RSRQ supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode

2	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table A.4.7.2.1.2-2: SS-RSRQ Intra frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 2	Cell 3	Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN			freq1		freq1		freq1	
Duplex mode	Config 1,4		FDD					
	Config 2,3,5,6		TDD					
TDD configuration	Config 1,4		Not Applicable					
	Config 2,5		TDDConf.1.1					
	Config 3,6		TDDConf.2.1					
$BW_{channel}$	Config 1,4	MHz	10: $N_{RB,c}$ = 52					
	Config 2,5		10: $N_{RB,c}$ = 52					
	Config 3,6		40: $N_{RB,c}$ = 106					
BWP configuration	Initial DL BWP		DLBWP.0.1					
	Dedicated DL BWP		DLBWP.1.1					
	Initial UL BWP		ULBWP.0.1					
	Dedicated UL BWP		ULBWP.1.1					
DRX Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2,5		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3,6		SR2.1 TDD		SR2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	
	Config 2,5		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
	Config 3,6		CR.2.1 TDD		CR.2.1 TDD		CR.2.1 TDD	
Control Channel RMC	Config 1,4		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2,5		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3,6		CCR.2.1 TDD		CCR.2.1 TDD		CCR.2.1 TDD	
TRS configuration	Config 1,4		TRS.1.1 FDD	-	TRS.1.1 FDD	-	TRS.1.1 FDD	-
	Config 2,5		TRS.1.1 TDD		TRS.1.1 TDD		TRS.1.1 TDD	
	Config 3,6		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD	
OCNG Patterns			OP. 1					
SS-RSSI-Measurement			Not Applicable					
Time offset with Cell 2	Config 1,4	ms	-	3	-	3	-	3
	Config 2,3,5,6	µs	-	3	-	3	-	3
SMTC configuration	Config 1,4		SMTC.2					
	Config 2,3,5,6		SMTC.1					
SSB configuration	Config 1,2,4,5		SSB.1 FR1					
	Config 3,6		SSB.2 FR1					
PDSCH/PDCCH	Config 1,2,4,5	kHz	15 kHz					

subcarrier spacing	Config 3,6			30kHz					
EPRE ratio of PSS to SSS			dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2	Config 1,2,4,5	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 7	dBm/15kHz	-85		-101		-114	
		NR_FDD_FR1_B						-113.5	
		NR_TDD_FR1_C						-113	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-112.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-112	
		NR_FDD_FR1_F						-111.5	
		NR_FDD_FR1_G						-111	
		NR_FDD_FR1_H						-110.5	
	Config 3,6	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 7		-91		-		-114	
		NR_FDD_FR1_B						-113.5	
		NR_TDD_FR1_C						-113	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-112.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-112	
		NR_FDD_FR1_F						-111.5	
		NR_FDD_FR1_G						-111	
		NR_FDD_FR1_H						-110.5	
N_{oc} Note2	Config 1,2,4,5	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 7	dBm/SCS	-85		-101		-114	
		NR_FDD_FR1_B						-113.5	
		NR_TDD_FR1_C						-113	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-112.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-112	
		NR_FDD_FR1_F						-111.5	
		NR_FDD_FR1_G						-111	
		NR_FDD_FR1_H						-110.5	
	Config 3,6	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 7		-88		-		-111	
		NR_FDD_FR1_B						-110.5	
		NR_TDD_FR1_C						-110	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-109.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-109	
		NR_FDD_FR1_F						-108.5	
		NR_FDD_FR1_G						-108	
		NR_FDD_FR1_H						-107.5	

$\hat{E}_s/I_{ot}$			dB	-1.76		-4.7		-5.46	-5.46
$\hat{E}_s/N_{oc}$			dB	3	3	-2.9	-2.9	-4	-4
SS-RSRP Note3	Config 1,2,4,5	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 7	dBm/SCS	-82	-82	-103.9	-103.9	-118	-118
		NR_FDD_FR1_B						-117.5	-117.5
		NR_TDD_FR1_C						-117	-117
		NR_FDD_FR1_D, NR_TDD_FR1_D						-116.5	-116.5
		NR_FDD_FR1_E, NR_TDD_FR1_E						-116	-116
		NR_FDD_FR1_F						-115.5	-115.5
		NR_FDD_FR1_G						-115	-115
		NR_FDD_FR1_H						-114.5	-114.5
	Config 3,6	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 7		-85	-85	-	-	-115	-115
		NR_FDD_FR1_B						-114.5	-114.5
		NR_TDD_FR1_C						-114	-114
		NR_FDD_FR1_D, NR_TDD_FR1_D						-113.5	-113.5
		NR_FDD_FR1_E, NR_TDD_FR1_E						-113	-113
		NR_FDD_FR1_F						-112.5	-112.5
		NR_FDD_FR1_G						-112	-112
		NR_FDD_FR1_H						-111.5	-111.5
SS-RSRQ Note3		NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 7	dB	-14.77	-14.77	-16.76	-16.76	-17.34	-17.34
		NR_FDD_FR1_B							
		NR_TDD_FR1_C							
		NR_FDD_FR1_D, NR_TDD_FR1_D							
		NR_FDD_FR1_E, NR_TDD_FR1_E							
		NR_FDD_FR1_F							
		NR_FDD_FR1_G							
		NR_FDD_FR1_H							
Io Note3	Config 1,2,4,5	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 7	dBm/ 9.36MHz	-50		-70		-83.5	
		NR_FDD_FR1_B						-83	
		NR_TDD_FR1_C						-82.5	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-82	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-81.5	
		NR_FDD_FR1_F						-81	
		NR_FDD_FR1_G						-80.5	
		NR_FDD_FR1_H						-80	
	Config 3,6	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 7	dBm/ 38.16MHz	-50		-		-77.4	
		NR_FDD_FR1_B						-76.9	
		NR_TDD_FR1_C						-76.4	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-75.9	

		NR_FDD_FR1_E, NR_TDD_FR1_E						-75.4	
		NR_FDD_FR1_F						-74.9	
		NR_FDD_FR1_G						-74.4	
		NR_FDD_FR1_H						-73.9	
Propagation condition			-	AWGN	AWGN	AWGN	AWGN	AWGN	AWGN
Antenna configuration				1x2	1x2	1x2	1x2	1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRQ, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: NR operating band groups are as defined in Clause 3.5.2.
Note 6: Subtest 2 is not used when testing with 30kHz SSB SCS
Note 7: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification

A.4.7.2.1.3 Test Requirements

The SS-RSRQ measurement accuracy shall fulfil the requirements in clause 10.1.7.1.1.

A.4.7.2.2 EN-DC Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.4.7.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.9.1.1 and 10.1.9.1.2 for inter frequency measurement.

A.4.7.2.2.2 Test Parameters

In this test case the two NR cells (i.e., Cell 2 and Cell 3) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.4.7.2.2.2-1. Both absolute accuracy and relative accuracy requirements of SS-RSRQ inter-frequency measurement are tested by using test parameters in Table A.4.7.2.2.2-2. In all test cases, Cell 2 is the PSCell and Cell 3 is target cell. Cell 1 is the E-UTRA cell which specific test parameters for this test case are specified in Table A.3.7.2.1-1.

Table A.4.7.2.2.2-1: SS-RSRQ Inter frequency SS-RSRQ supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.4.7.2.2.2-2: SS-RSRQ Inter frequency test parameters

Parameter	Unit	Test 1		Test 2		Test 3	
		Cell 2	Cell 3	Cell 2	Cell 3	Cell 2	Cell 3

SSB ARFCN			freq1	freq2	freq1	freq2	freq1	freq2
Duplex mode	Config 1,4		FDD					
	Config 2,3,5,6		TDD					
TDD configuration	Config 1,4		Not Applicable					
	Config 2,5		TDDConf.1.1					
	Config 3,6		TDDConf.2.1					
$BW_{channel}$	Config 1,4	MHz	10: $N_{RB,c}$ = 52					
	Config 2,5		10: $N_{RB,c}$ = 52					
	Config 3,6		40: $N_{RB,c}$ = 106					
BWP BW	Config 1,4	MHz	10: $N_{RB,c}$ = 52					
	Config 2,5		10: $N_{RB,c}$ = 52					
	Config 3,6		40: $N_{RB,c}$ = 106					
DRX Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2,5		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3,6		SR.2.1 TDD		SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	-
	Config 2,5		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
	Config 3,6		CR.2.1 TDD		CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1,4		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2,5		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3,6		CCR.2.1 TDD		CCR.2.1 TDD		CCR.2.1 TDD	
TRS configuration	Config 1,4		TRS.1.1 FDD	-	TRS.1.1 FDD	-	TRS.1.1 FDD	-
	Config 2,5		TRS.1.1 TDD		TRS.1.1 TDD		TRS.1.1 TDD	
	Config 3,6		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD	
OCNG Patterns			OCNG pattern 1					
Time offset with Cell 2	Config 1,4	ms	-	3	-	3	-	3
	Config 2,3,5,6	µs	-	3	-	3	-	3
SMTC configuration	Config 1,4		SMTC pattern 2					
	Config 2,3,5,6		SMTC pattern 1					
SSB configuration	Config 1,2,4,5		SSB pattern 1 in FR1					
	Config 3,6		SSB pattern 2 in FR1					
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15 kHz					
	Config 3,6		30 kHz					
EPRE ratio of PSS to SSS EPRE ratio of PBCH DMRS to SSS EPRE ratio of PBCH to PBCH DMRS		dB	0	0	0	0	0	0

EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2	Config 1,2,4,5	NR_FDD_FR1_A NR_TDD_FR1_A NR_SDL_FR1_A	dBm/15kHz	-80.18	-80.18	-106	-106	-116	-116
		NR_FDD_FR1_B						-115.5	-115.5
		NR_TDD_FR1_C						-115	-115
		NR_FDD_FR1_D NR_TDD_FR1_D						-114.5	-114.5
		NR_FDD_FR1_E NR_TDD_FR1_E						-114	-114
		NR_FDD_FR1_G						-113	-113
		NR_FDD_FR1_H						-112.5	-112.5
	Config 3,6	NR_FDD_FR1_A NR_TDD_FR1_A NR_SDL_FR1_A	dBm/15kHz	-86.27	-86.27	-113	-113	-116	-116
		NR_FDD_FR1_B						-115.5	-115.5
		NR_TDD_FR1_C						-115	-115
		NR_FDD_FR1_D NR_TDD_FR1_D						-114.5	-114.5
		NR_FDD_FR1_E NR_TDD_FR1_E						-114	-114
		NR_FDD_FR1_G						-113	-113
		NR_FDD_FR1_H						-112.5	-112.5
N_{oc} Note2	Config 1,2,4,5	NR_FDD_FR1_A NR_TDD_FR1_A NR_SDL_FR1_A	dBm/SCS	-80.18	-80.18	-106	-106	-116	-116
		NR_FDD_FR1_B						-115.5	-115.5
		NR_TDD_FR1_C						-115	-115
		NR_FDD_FR1_D NR_TDD_FR1_D						-114.5	-114.5
		NR_FDD_FR1_E NR_TDD_FR1_E						-114	-114
		NR_FDD_FR1_G						-113	-113
		NR_FDD_FR1_H						-112.5	-112.5
	Config 3,6	NR_FDD_FR1_A NR_TDD_FR1_A NR_SDL_FR1_A		-83.27	-83.27	-110	-110	-113	-113
		NR_FDD_FR1_B						-112.5	-112.5
		NR_TDD_FR1_C						-112	-112
		NR_FDD_FR1_D NR_TDD_FR1_D						-111.5	-111.5
		NR_FDD_FR1_E NR_TDD_FR1_E						-111	-111
		NR_FDD_FR1_G						-110	-110
		NR_FDD_FR1_H						-109.5	-109.5
$\hat{E}_s / I_{ot}$			dB	-1.75	-1.75	-1.75	-1.75	3	-1.75
$\hat{E}_s / N_{oc}$			dB	-1.75	-1.75	-1.75	-1.75	3	-1.75
SS-RSRP Note3	Config 1,2,4,5	NR_FDD_FR1_A NR_TDD_FR1_A NR_SDL_FR1_A	dBm/SCS	-81.93	-81.93	-107.75	-107.75	-113	-117.75
		NR_FDD_FR1_B						-112.5	-117.25
		NR_TDD_FR1_C						-112	-116.75
		NR_FDD_FR1_D NR_TDD_FR1_D						-111.5	-116.25
		NR_FDD_FR1_E NR_TDD_FR1_E						-111	-115.75
		NR_FDD_FR1_G						-110	-114.75

		NR_FDD_FR1_H						-109.5	-114.25
	Config 3,6	NR_FDD_FR1_A NR_TDD_FR1_A NR_SDL_FR1_A		-85.02	-85.02	-111.75	-111.75	-110	-114.75
		NR_FDD_FR1_B						-109.5	-114.25
		NR_TDD_FR1_C						-109	-113.75
		NR_FDD_FR1_D NR_TDD_FR1_D						-108.5	-113.25
		NR_FDD_FR1_E NR_TDD_FR1_E						-108	-112.75
		NR_FDD_FR1_G						-107	-111.75
		NR_FDD_FR1_H						-106.5	-111.25
SS-RSRQ Note3		NR_FDD_FR1_A NR_TDD_FR1_A	dB	-14.77	-14.77	-40.59	-40.59	-12.56	-14.76
		NR_FDD_FR1_B							
		NR_TDD_FR1_C							
		NR_FDD_FR1_D NR_TDD_FR1_D							
		NR_FDD_FR1_E NR_TDD_FR1_E							
		NR_FDD_FR1_G							
		NR_FDD_FR1_H							
Io Note3	Config 1,2,4,5	NR_FDD_FR1_A NR_TDD_FR1_A NR_SDL_FR1_A	dBm/ 9.36MHz	-50	-50	-75.83	-75.83	-83.28	-85.83
		NR_FDD_FR1_B						-82.78	-85.33
		NR_TDD_FR1_C						-82.28	-84.83
		NR_FDD_FR1_D NR_TDD_FR1_D						-81.78	-84.33
		NR_FDD_FR1_E NR_TDD_FR1_E						-81.28	-83.83
		NR_FDD_FR1_G						-80.28	-82.83
		NR_FDD_FR1_H						-79.78	-82.33
	Config 3,6	NR_FDD_FR1_A NR_TDD_FR1_A NR_SDL_FR1_A	dBm/ 38.16MHz	-50	-50	-76.73	-76.73	-77.19	-79.73
		NR_FDD_FR1_B						-76.69	-79.23
		NR_TDD_FR1_C						-76.19	-78.73
		NR_FDD_FR1_D NR_TDD_FR1_D						-75.69	-78.23
		NR_FDD_FR1_E NR_TDD_FR1_E						-75.19	-77.73
		NR_FDD_FR1_G						-74.19	-76.73
		NR_FDD_FR1_H						-73.69	-76.53
Propagation condition				AWGN	AWGN	AWGN	AWGN	AWGN	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRQ, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: NR operating band groups are as defined in Clause 3.5.2.

A.4.7.2.2.3 Test Requirements

The SS-RSRQ measurement accuracy shall fulfil the requirements in clause 10.1.9.1.1 and 10.1.9.1.2.

A.4.7.3 SS-SINR

A.4.7.3.1 EN-DC Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.4.7.3.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.12.1.1.

A.4.7.3.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table A.4.7.3.1.2-1. The absolute accuracy of SS-SINR intra-frequency measurement is tested by using the parameters in Table A.4.7.3.1.2-2. The configuration of cell 1 (E-UTRA PCell) is specified in clause A.3.7.2.1. In all test cases, Cell 2 is the PSCell and Cell 3 is the target cell.

Table A.4.7.3.1.2-1: SS-SINR Intra frequency SS-SINR supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.4.7.3.1.2-2: SS-SINR Intra frequency test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN			freq1		freq1	
Duplex mode	Config 1,4		FDD			
	Config 2,3,5,6		TDD			
TDD configuration	Config 1,4		Not Applicable			
	Config 2,5		TDDConf.1.1			
	Config 3,6		TDDConf.2.1			
Downlink initial BWP configuration			DLBWP.0.1			
Downlink dedicated BWP configuration			DLBWP.1.1			
Uplink initial BWP configuration			ULBWP.0.1			
Uplink dedicated BWP configuration			ULBWP.1.1			
DRX Cycle configuration		ms	Not Applicable			
TRS Configuration	Config 1,4		TRS.1.1 FDD	-	TRS.1.1 FDD	-
	Config 2,5		TRS.1.1 TDD		TRS.1.1 TDD	
	Config 3,6		TRS.1.2 TDD		TRS.1.2 TDD	
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2,5		SR.1.1 TDD		SR.1.1 TDD	
	Config 3,6		SR.2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	-	CR.1.1 FDD	

		Config 2,5		CR.1.1 TDD		CR.1.1 TDD	
		Config 3,6		CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET Reference Channel		Config 1,4		CCR.1.1 FDD	-	CCR.1.1 FDD	-
		Config 2,5		CCR.1.1 TDD		CCR.1.1 TDD	
		Config 3,6		CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns				OP.1			
SS-RSSI-Measurement				Not Applicable			
Time offset with Cell 2		Config 1,4	ms	-	3	-	3
		Config 2,3,5,6	µs	-	3	-	3
SMTC configuration		Config 1,4		SMTC.2			
		Config 2,3,5,6		SMTC.1			
SSB configuration		Config 1,2,4,5		SSB.1 FR1			
		Config 3,6		SSB.2 FR1			
PDSCH/PDCCH subcarrier spacing		Config 1,2,4,5	kHz	15			
		Config 3,6		30			
EPRE ratio of PSS to SSS			dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/15kHz	-93		-116	
		NR_FDD_FR1_B				-115.5	
		NR_TDD_FR1_C				-115	
		NR_FDD_FR1_D, NR_TDD_FR1_D				-114.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E				-114	
		NR_FDD_FR1_F				-113.5	
		NR_FDD_FR1_G				-113	
		NR_FDD_FR1_H				-112.5	
N_{oc} Note2	Config 1,2,4,5		dBm/SCS	-93		Same as Noc for 15kHz	
	Config 3,6	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-90		-113	
		NR_FDD_FR1_B				-112.5	
		NR_TDD_FR1_C				-112	
		NR_FDD_FR1_D, NR_TDD_FR1_D				-111.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E				-111	
		NR_FDD_FR1_F				-110.5	
		NR_FDD_FR1_G				-110	
		NR_FDD_FR1_H				-109.5	
$\hat{E}_s / I_{ot}$			dB	0	-3.19	-5.46	-5.46
$\hat{E}_s / N_{oc}$			dB	4.54	2.66	-4	-4

SS-RSRP Note3	Config 1,2,4,5	NR_FDD_FR1_A, NR_TDD_FR1_A	dBm/SCS	-88.46	-90.34	-120	-120
		NR_FDD_FR1_B				-119.5	-119.5
		NR_TDD_FR1_C				-119	-119
		NR_FDD_FR1_D, NR_TDD_FR1_D				-118.5	-118.5
		NR_FDD_FR1_E, NR_TDD_FR1_E				-118	-118
		NR_FDD_FR1_F				-117.5	-117.5
		NR_FDD_FR1_G				-117	-117
		NR_FDD_FR1_H				-116.5	-116.5
	Config 3,6	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-85.46	-87.34	-117	-117
		NR_FDD_FR1_B				-116.5	-116.5
		NR_TDD_FR1_C				-116	-116
		NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5	-115.5
		NR_FDD_FR1_E, NR_TDD_FR1_E				-115	-115
		NR_FDD_FR1_F				-114.5	-114.5
		NR_FDD_FR1_G				-114	-114
		NR_FDD_FR1_H				-113.5	-113.5
SS-SINR Note3		NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dB	0	-3.19	-5.46	-5.46
		NR_FDD_FR1_B					
		NR_TDD_FR1_C					
		NR_FDD_FR1_D, NR_TDD_FR1_D					
		NR_FDD_FR1_E, NR_TDD_FR1_E					
		NR_FDD_FR1_F					
		NR_FDD_FR1_G					
		NR_FDD_FR1_H					
Io Note3	Config 1,2,4,5	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 9.36MHz	-57.5		-85.51	
		NR_FDD_FR1_B				-85.01	
		NR_TDD_FR1_C				-84.51	
		NR_FDD_FR1_D, NR_TDD_FR1_D				-84.01	
		NR_FDD_FR1_E, NR_TDD_FR1_E				-83.51	
		NR_FDD_FR1_F				-83.01	
		NR_FDD_FR1_G				-82.51	
		NR_FDD_FR1_H				-82.01	
	Config 3,6	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 38.16MHz	-51.41		-79.41	
		NR_FDD_FR1_B				-78.91	
		NR_TDD_FR1_C				-78.41	
		NR_FDD_FR1_D, NR_TDD_FR1_D				-77.91	
		NR_FDD_FR1_E, NR_TDD_FR1_E				-77.41	
		NR_FDD_FR1_F				-76.91	
		NR_FDD_FR1_G				-76.41	
		NR_FDD_FR1_H				-75.91	

Propagation condition	-	AWGN
Antenna configuration	-	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 5: NR operating band groups are as defined in Clause 3.5.2. Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification		

A.4.7.3.1.3 Test Requirements

The SS-SINR measurement accuracy shall fulfil the requirements in clause 10.1.12.1.1.

A.4.7.3.2 EN-DC Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.4.7.3.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.14.1.1 and 10.1.14.1.2 for interfrequency measurement.

A.4.7.3.2.2 Test Parameters

In this test case the two NR cells (i.e., Cell 2 and Cell 3) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.4.7.3.2.2-1. Both absolute accuracy and relative accuracy requirements of SS-SINR inter-frequency measurement are tested by using test parameters in Table A.4.7.3.2.2-2. In all test cases, Cell 2 is the PSCell and Cell 3 is target cell. Cell 1 is the E-UTRA cell of which specific test parameters for this test case are specified in Table A.3.7.2.1-1.

Table A.4.7.3.2.2-1: SS-SINR Inter frequency SS-SINR supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.4.7.3.2.2-2: SS-SINR Inter frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 2	Cell 3	Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN			freq1	freq2	freq1	freq2	freq1	freq2
Duplex mode	Config 1,4		FDD					
	Config 2,3,5,6		TDD					
TDD configuration	Config 1,4		Not Applicable					
	Config 2,5		TDDConf.1.1					
	Config 3,6		TDDConf.2.1					

Downlink initial BWP configuration			DLBWP.0.1						
Downlink dedicated BWP configuration			DLBWP.1.1						
Uplink initial BWP configuration			ULBWP.0.1						
Uplink dedicated BWP configuration			ULBWP.1.1						
DRX Cycle configuration		ms	Not Applicable						
Gap pattern ID			0	-	0	-	0	-	
TRS configuration	Config 1,4		TRS.1.1 FDD	-	TRS.1.1 FDD	-	TRS.1.1 FDD	-	
	Config 2,5		TRS.1.1 TDD		TRS.1.1 TDD		TRS.1.1 TDD		
	Config 3,6		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD		
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-	
	Config 2,5		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD		
	Config 3,6		SR.2.1 TDD		SR.2.1 TDD		SR.2.1 TDD		
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	-	
	Config 2,5		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD		
	Config 3,6		CR.2.1 TDD		CR.2.1 TDD		CR.2.1 TDD		
Dedicated CORESET Reference Channel	Config 1,4		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-	
	Config 2,5		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD		
	Config 3,6		CCR.2.1 TDD		CCR.2.1 TDD		CCR.2.1 TDD		
OCNG Patterns			OP.1						
SS-RSSI-Measurement			Not Applicable						
Time offset with Cell 2	Config 1,4	ms	-	3	-	3	-	3	
	Config 2,3,5,6	µs	-	3	-	3	-	3	
SMTC configuration	Config 1,4		SMTC.2						
	Config 2,3,5,6		SMTC.1						
SSB configuration	Config 1,2,4,5		SSB.1 FR1						
	Config 3,6		SSB.2 FR1						
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15						
	Config 3,6		30						
EPRE ratio of PSS to SSS		dB	0	0	0	0	0	0	
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2	Config 1,2,4,5	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/15kHz	-88		-108.5		-119.5	
		NR_FDD_FR1_B						-119	
		NR_TDD_FR1_C						-118.5	
		NR_FDD_FR1_D NR_TDD_FR1_D						-118	

		NR_FDD_FR1_E NR_TDD_FR1_E				-117.5
		NR_FDD_FR1_F				-117
		NR_FDD_FR1_G				-116.5
		NR_FDD_FR1_H				-116
N_{oc} Note2	Config 1,2,4,5		dBm/SCS	-88	-108.5	Same as Noc for 15kHz
	Config 3,6	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6		-85	-105.5	-116.5
		NR_FDD_FR1_B				-116
		NR_TDD_FR1_C				-115.5
		NR_FDD_FR1_D NR_TDD_FR1_D				-115
		NR_FDD_FR1_E NR_TDD_FR1_E				-114.5
		NR_FDD_FR1_F				-114
		NR_FDD_FR1_G				-114.5
		NR_FDD_FR1_H				-113
$\hat{E}_s / I_{ot}$			dB	-1.75	20	-4.0
$\hat{E}_s / N_{oc}$			dB	-1.75	20	-4.0
SS-RSRP Note3	Config 1,2,4,5	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/SCS	-89.75	-88.5	-123.5
		NR_FDD_FR1_B				-123
		NR_TDD_FR1_C				-122.5
		NR_FDD_FR1_D NR_TDD_FR1_D				-122
		NR_FDD_FR1_E NR_TDD_FR1_E				-121.5
		NR_FDD_FR1_F				-121
		NR_FDD_FR1_G				-120.5
		NR_FDD_FR1_H				-120
	Config 3,6	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6		-86.75	-85.5	-120.5
		NR_FDD_FR1_B				-120
		NR_TDD_FR1_C				-119.5
		NR_FDD_FR1_D NR_TDD_FR1_D				-119
		NR_FDD_FR1_E NR_TDD_FR1_E				-118.5
		NR_FDD_FR1_F				-118
		NR_FDD_FR1_G				-117.5
		NR_FDD_FR1_H				-117
SS-SINR Note3		NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dB	-1.75	20	-4.0
		NR_FDD_FR1_B				
		NR_TDD_FR1_C				
		NR_FDD_FR1_D NR_TDD_FR1_D				
		NR_FDD_FR1_E NR_TDD_FR1_E				
		NR_FDD_FR1_F				
		NR_FDD_FR1_G				
		NR_FDD_FR1_H				
Io Note3	Config 1,2,4,5	NR_FDD_FR1_A	dBm/ 9.36MHz	-57.83	-60.5	-90.09

		NR_TDD_FR1_A NOTE 6				
		NR_FDD_FR1_B				-89.59
		NR_TDD_FR1_C				-89.09
		NR_FDD_FR1_D NR_TDD_FR1_D				-88.59
		NR_FDD_FR1_E NR_TDD_FR1_E				-88.09
		NR_FDD_FR1_F				-87.59
		NR_FDD_FR1_G				-87.09
		NR_FDD_FR1_H				-86.59
	Config 3,6	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/ 38.16MHz	-51.73	-54.41	-84
		NR_FDD_FR1_B				-83.5
		NR_TDD_FR1_C				-83
		NR_FDD_FR1_D NR_TDD_FR1_D				-82.5
		NR_FDD_FR1_E NR_TDD_FR1_E				-82
		NR_FDD_FR1_F				-81.5
		NR_FDD_FR1_G				-81
		NR_FDD_FR1_H				-80.5
Propagation condition			-	AWGN		
Antenna configuration			-	1x2		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: NR operating band groups are as defined in Clause 3.5.2.

Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification

A.4.7.3.2.3 Test Requirements

The SS-SINR measurement accuracy shall fulfil the requirements in clause 10.1.14.1.1 and 10.1.14.1.2.

A.4.7.4 L1-RSRP measurement for beam reporting

A.4.7.4.1 SSB based L1-RSRP measurement

A.4.7.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 9.5.2 and clause 10.1.19.1 for L1-RSRP measurements based on SSB with the testing configurations for NR cells in Table A.4.7.4.1.1-1.

Table A.4.7.4.1.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode

5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.4.7.4.1.2 Test parameters

In this set of test cases there are two cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.4.7.4.1.2-1 below. The absolute and relative accuracy of L1-RSRP measurements are tested by using the parameters in Table A.4.7.4.1.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured one SSB resource set with two SSB resources. UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSB resources 0 and 1.

Table A.4.7.4.1.2-1: FR1 SSB based L1-RSRP test parameters

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1~6		freq1	freq1
Duplex mode	1,4		FDD	FDD
	2,5		TDD	TDD
	3,6		TDD	TDD
TDD Configuration	1,4		N/A	N/A
	2,5		TDDConf.1.1	TDDConf.1.1
	3,6		TDDConf.2.1	TDDConf.2.1
$BW_{channel}$	1,4	MHz	10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
	2,5		10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
	3,6		40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1,4		SR.1.1 FDD	SR.1.1 FDD
	2,5		SR.1.1 TDD	SR.1.1 TDD
	3,6		SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD	CR.1.1 FDD
	2,5		CR.1.1 TDD	CR.1.1 TDD
	3,6		CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD	CCR.1.1 FDD
	2,5		CCR.1.1 TDD	CCR.1.1 TDD
	3,6		CCR.2.1 TDD	CCR.2.1 TDD
SSB configuration	1,4		SSB.3 FR1	SSB.3 FR1
	2,5		SSB.3 FR1	SSB.3 FR1
	3,6		SSB.4 FR1	SSB.4 FR1
OCNG Patterns	1~6		OP.1	OP.1
TRS configuration	1,4		TRS.1.1 FDD	TRS.1.1 FDD
	2,5		TRS.1.1 TDD	TRS.1.1 TDD
	3,6		TRS.1.2 TDD	TRS.1.2 TDD
Initial BWP Configuration	1~6		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~6		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~6		SMTC.1	SMTC.1
reportConfigType	1~6		periodic	periodic
reportQuantity	1~6		ssb-Index-RSRP	ssb-Index-RSRP
Number of reported RS	1~6		2	2
L1-RSRP reporting period	1~6		slot80	slot80
EPRE ratio of PSS to SSS	1~6	dB	0	0
EPRE ratio of PBCH DMRS to SSS				

EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1~6	dBm/15kHz	-94.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2,4,5	dBm/SSB SCS	-94.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3,6		-91.65	-114
	NR_FDD_FR1_B				-113.5
	NR_TDD_FR1_C				-114
	NR_FDD_FR1_D, NR_TDD_FR1_D				-112.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-112
	NR_FDD_FR1_F				-111.5
	NR_FDD_FR1_G				-111
	NR_FDD_FR1_H				-110.5
$\hat{E}_s/I_{ot}$		1~6	dB	10	-3
SSB RSRP Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2,4,5	dBm/SSB SCS	-84.65	-120
	NR_FDD_FR1_B				-119.5
	NR_TDD_FR1_C				-119
	NR_FDD_FR1_D, NR_TDD_FR1_D				-118.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-118

	NR_FDD_FR1_F				-117.5
	NR_FDD_FR1_G				-117
	NR_FDD_FR1_H				-116.5
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3,6		-81.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
Io Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2,4,5	dBm/9.36 MHz	-56.28	-87.28
	NR_FDD_FR1_B				-86.78
	NR_TDD_FR1_C				-86.28
	NR_FDD_FR1_D, NR_TDD_FR1_D				-85.78
	NR_FDD_FR1_E, NR_TDD_FR1_E				-85.28
	NR_FDD_FR1_F				-84.78
	NR_FDD_FR1_G				-84.28
	NR_FDD_FR1_H				-83.78
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3,6	dBm/38.16 MHz	-50.19	-81.19
	NR_FDD_FR1_B				-80.69
	NR_TDD_FR1_C				-80.19
	NR_FDD_FR1_D, NR_TDD_FR1_D				-79.69
	NR_FDD_FR1_E, NR_TDD_FR1_E				-79.19
	NR_FDD_FR1_F				-78.69
	NR_FDD_FR1_G				-78.19
	NR_FDD_FR1_H				-77.69
$\hat{E}_s / N_{oc}$		1~6	dB	10	-3
Propagation condition		1~6		AWGN	AWGN
Antenna configuration		1~6		1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification

A.4.7.4.1.3 Test Requirements

The L1-RSRP measurement accuracy for SSB resource reported by UE in L1-RSRP report (SSB#0 or SSB#1) of Cell 2 shall fulfil the requirements in clauses 10.1.19.1.

A.4.7.4.2 CSI-RS based L1-RSRP measurement on resource set with repetition off

A.4.7.4.2.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 9.5.3 and clause 10.1.19.2 for L1-RSRP measurements based on CSI-RS with the testing configurations for NR cells in Table A.4.7.4.2.1-1.

Table A.4.7.4.2.1-1: Applicable NR configurations for FR1 CSI-RS based L1-RSRP test

Config	Description
1	LTE FDD, NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30kHz CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30kHz CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.4.7.4.2.2 Test parameters

In this set of test cases there are two cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.4.7.4.2.2-1 below. The absolute and relative accuracy of L1-RSRP measurements are tested by using the parameters in Table A.4.7.4.2.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured one CSI-RS resource set with two CSI-RS resources. UE is configured to perform RLM and BFD based on SSB 0 and 1. CSI-RS is not transmitted in the same OFDM symbols as SSB.

Table A.4.7.4.2.2-1: FR1 CSI-RS based L1-RSRP test parameters

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1~6		freq1	freq1
Duplex mode	1,4		FDD	FDD
	2,5		TDD	TDD
	3,6		TDD	TDD
TDD Configuration	1,4		N/A	N/A
	2,5		TDDConf.1.1	TDDConf.1.1
	3,6		TDDConf.2.1	TDDConf.2.1
$BW_{channel}$	1,4	MHz	10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
	2,5		10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
	3,6		40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1,4		SR.1.1 FDD	SR.1.1 FDD
	2,5		SR.1.1 TDD	SR.1.1 TDD
	3,6		SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD	CR.1.1 FDD
	2,5		CR.1.1 TDD	CR.1.1 TDD
	3,6		CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD	CCR.1.1 FDD
	2,5		CCR.1.1 TDD	CCR.1.1 TDD
	3,6		CCR.2.1 TDD	CCR.2.1 TDD
SSB configuration	1,4		SSB.3 FR1	SSB.3 FR1
	2,5		SSB.3 FR1	SSB.3 FR1
	3,6		SSB.4 FR1	SSB.4 FR1
OCNG Patterns	1~6		OP.1	OP.1

TRS configuration		1,4		TRS.1.1 FDD	TRS.1.1 FDD
		2,5		TRS.1.1 TDD	TRS.1.1 TDD
		3,6		TRS.1.2 TDD	TRS.1.2 TDD
Initial BWP Configuration		1~6		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration		1~6		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
SMTC configuration		1~6		SMTC.1	SMTC.1
CSI-RS		1,4		CSI-RS 1.2 FDD	CSI-RS 1.2 FDD
		2,5		CSI-RS 1.2 TDD	CSI-RS 1.2 TDD
		3,6		CSI-RS 2.2 TDD	CSI-RS 2.2 FDD
reportConfigType		1~6		periodic	periodic
reportQuantity		1~6		cri-RSRP	cri-RSRP
Number of reported RS		1~6		2	2
L1-RSRP reporting period		1~6		slot80	slot80
EPRE ratio of PSS to SSS		1~6	dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1~6	dBm/15kHz	-94.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2,4,5	dBm/CSI-RS SCS	-94.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3,6		-91.65	-114
	NR_FDD_FR1_B				-113.5

	NR_TDD_FR1_C				-114
	NR_FDD_FR1_D, NR_TDD_FR1_D				-112.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-112
	NR_FDD_FR1_F				-111.5
	NR_FDD_FR1_G				-111
	NR_FDD_FR1_H				-110.5
$\hat{E}_s / I_{ot}$		1~6	dB	10	10
CSI-RS RSRP Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2,4,5	dBm/CSI-RS SCS	-84.65	-120
	NR_FDD_FR1_B				-119.5
	NR_TDD_FR1_C				-119
	NR_FDD_FR1_D, NR_TDD_FR1_D				-118.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-118
	NR_FDD_FR1_F				-117.5
	NR_FDD_FR1_G				-117
	NR_FDD_FR1_H				-116.5
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3,6		-81.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
Io Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2,4,5	dBm/9.36 MHz	-56.28	-87.28
	NR_FDD_FR1_B				-86.78
	NR_TDD_FR1_C				-86.28
	NR_FDD_FR1_D, NR_TDD_FR1_D				-85.78
	NR_FDD_FR1_E, NR_TDD_FR1_E				-85.28
	NR_FDD_FR1_F				-84.78
	NR_FDD_FR1_G				-84.28
	NR_FDD_FR1_H				-83.78
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3,6	dBm/38.16 MHz	-50.19	-81.19
	NR_FDD_FR1_B				-80.69
	NR_TDD_FR1_C				-80.19
	NR_FDD_FR1_D, NR_TDD_FR1_D				-79.69
	NR_FDD_FR1_E, NR_TDD_FR1_E				-79.19
	NR_FDD_FR1_F				-78.69
	NR_FDD_FR1_G				-78.19
	NR_FDD_FR1_H				-77.69
$\hat{E}_s / N_{oc}$		1~6	dB	10	-3
Propagation condition		1~6		AWGN	AWGN

Antenna configuration	1~6		1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification

A.4.7.4.2.3 Test Requirements

The L1-RSRP measurement accuracy for CSI-RS resource reported by UE in L1-RSRP report (CSI-RS#0 or CSI-RS#1) of Cell 2 shall fulfil the requirements in clauses 10.1.19.2.

A.4.7.5 SFTD accuracy

A.4.7.5.1 SFTD accuracy

A.4.7.5.1.1 Test Purpose and Environment

The purpose of this set of tests is to verify that the SFTD measurement accuracy is within the specified limits. This test will verify the requirements as specified in clause 9.1.27 in TS 36.133 [15] for EN-DC SFTD measurements.

A.4.7.5.1.2 Test Parameters

Supported test configurations are shown in Table A.4.7.5.1.2-1. In this set of test cases there are two cells on different carriers. Cell 1 is E-UTRAN PCell and Cell 2 is NR FR1 PSCell. The test parameters of cell 1 are given in clause A.3.7.2.1. The test parameters of cell 2 are given in Table A.4.7.5.1.2-2. The SFTD between PCell and PSCell shall be set by the test equipment to one of the time differences in Table A.4.7.5.1.2-3.

Table A.4.7.5.1.2-1: Supported test configurations for SFTD accuracy

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.4.7.5.1.2-2: Test parameters for SFTD accuracy

Parameter	Config	Unit	Test 1
SSB GSCN	1~6		freq1
Duplex mode	1,4		FDD
	2,5		TDD
	3,6		TDD
TDD Configuration	1,4		N/A
	2,5		TDDConf.1.1
	3,6		TDDConf.2.1
$BW_{channel}$	1,4	MHz	10: $N_{RB,c}$ = 52
	2,5		10: $N_{RB,c}$ = 52

		3,6		40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel		1,4		SR.1.1 FDD
		2,5		SR.1.1 TDD
		3,6		SR.2.1 TDD
RMSI CORESET Reference Channel		1,4		CR.1.1 FDD
		2,5		CR.1.1 TDD
		3,6		CR.2.1 TDD
RMC CORESET Reference Channel		1,4		CCR.1.1 FDD
		2,5		CCR.1.1 TDD
		3,6		CCR.2.1 TDD
SSB configuration		1,4		SSB.1 FR1
		2,5		SSB.1 FR1
		3,6		SSB.2 FR1
SMTC configuration		1~6		SMTC.1
DL BWP configuration		1~6		DLBWP.1.1
UL BWP configuration		1~6		ULBWP.1.1
CSI-RS for tracking		1,4		TRS.1.1 FDD
		2,5		TRS.1.1 TDD
		3,6		TRS.1.2 TDD
OCNG Patterns		1~6		OP.1
EPRE ratio of PSS to SSS		1~6	dB	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1~6	dBm/15kHz	-104
	NR_FDD_FR1_B			
	NR_TDD_FR1_C			
	NR_FDD_FR1_D, NR_TDD_FR1_D			
	NR_FDD_FR1_E, NR_TDD_FR1_E			
	NR_FDD_FR1_F			
	NR_FDD_FR1_G			
	NR_FDD_FR1_H			
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2,4,5	dBm/SSB SCS	-104
	NR_FDD_FR1_B			
	NR_TDD_FR1_C			
	NR_FDD_FR1_D, NR_TDD_FR1_D			
	NR_FDD_FR1_E, NR_TDD_FR1_E			
	NR_FDD_FR1_F			
	NR_FDD_FR1_G			
	NR_FDD_FR1_H			
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3,6		-101
	NR_FDD_FR1_B			
	NR_TDD_FR1_C			

	NR_FDD_FR1_D, NR_TDD_FR1_D			
	NR_FDD_FR1_E, NR_TDD_FR1_E			
	NR_FDD_FR1_F			
	NR_FDD_FR1_G			
	NR_FDD_FR1_H			
$\hat{E}_s/I_{ot}$		1~6	dB	-3
$\hat{E}_s/N_{oc}$		1~6	dB	-3
SS-RSRP Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2,4,5	dBm/SCS	-107
	NR_FDD_FR1_B			
	NR_TDD_FR1_C			
	NR_FDD_FR1_D, NR_TDD_FR1_D			
	NR_FDD_FR1_E, NR_TDD_FR1_E			
	NR_FDD_FR1_F			
	NR_FDD_FR1_G			
	NR_FDD_FR1_H			
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3,6		-104
	NR_FDD_FR1_B			
	NR_TDD_FR1_C			
	NR_FDD_FR1_D, NR_TDD_FR1_D			
	NR_FDD_FR1_E, NR_TDD_FR1_E			
	NR_FDD_FR1_F			
	NR_FDD_FR1_G			
	NR_FDD_FR1_H			
Io Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2,4,5	dBm/9.36 MHz	-74.28
	NR_FDD_FR1_B			
	NR_TDD_FR1_C			
	NR_FDD_FR1_D, NR_TDD_FR1_D			
	NR_FDD_FR1_E, NR_TDD_FR1_E			
	NR_FDD_FR1_F			
	NR_FDD_FR1_G			
	NR_FDD_FR1_H			
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3,6	dBm/38.16 MHz	-68.18
	NR_FDD_FR1_B			
	NR_TDD_FR1_C			
	NR_FDD_FR1_D, NR_TDD_FR1_D			
	NR_FDD_FR1_E, NR_TDD_FR1_E			
	NR_FDD_FR1_F			
	NR_FDD_FR1_G			
	NR_FDD_FR1_H			
Propagation condition		1~6		AWGN
Antenna configuration		1~6		1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				

Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification

Table A.4.7.5.1.2-3: Timing offsets for SFTD accuracy test

Condition	SFN offset between PCell and PSCell	Frame boundary offset between PCell and PSCell (Ts)
1	100	-122000
2	300	-60540
3	500	1000
4	700	62540
5	900	124000

A.4.7.5.1.3 Test Requirements

The SFTD reported by the UE consists of 2 elements, SFN offset and frame boundary offset between PCell and PSCell. The reported SFTD accuracy shall fulfil the requirement in clause 9.1.27 in TS 36.133 [15].

A.4.7.5.2 Void

A.4.7.5.3 Void

A.4.7.6 CLI measurements

A.4.7.6.1 EN-DC SRS-RSRP measurement accuracy with FR1 serving cell

A.4.7.6.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SRS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 10.1.22.1.1 with the testing configurations for NR cells in Table A.4.7.6.1.1-1.

Table A.4.7.6.1.1-1: Applicable NR configurations for FR1 SRS-RSRP accuracy test

Config	Description
1	LTE FDD, NR 15 kHz SRS SCS, 10 MHz bandwidth, TDD duplex mode
2	LTE FDD, NR 30kHz SRS SCS, 40 MHz bandwidth, TDD duplex mode
3	LTE TDD, NR 15 kHz SRS SCS, 10 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 30kHz SRS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.4.7.6.1.2 Test parameters

In this set of test cases there are two cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.4.7.6.1.2-1 below. The test parameter for the (virtual) neighbor cell UE transmitting SRS are given in Table A.4.7.6.1.2-2.

Before the test UE is configured to perform SRS-RSRP measurement. During the test, the test system transmits SRS resources for measurement in the DL slots according to the SRS configuration in Table A.4.7.6.1.2-3. There is no measurement gap configured in the test. During the test, the test system does not transmit PDCCH/PDSCH/OCNG on SRS symbol to be transmitted and on 1 data symbol before SRS to be transmitted.

Table A.4.7.6.1.2-1: FR1 test parameters for SRS-RSRP accuracy for PSCell

Parameter		Config	Unit	Test 1	Test 2	Test 3
SSB GSCN		1~4		freq1	freq1	freq1
Duplex mode		1~4		TDD	TDD	TDD
TDD configuration		1,3		TDDConf.1.1	TDDConf.1.1	TDDConf.1.1
		2,4		TDDConf.2.1	TDDConf.2.1	TDDConf.2.1
$BW_{channel}$		1,3	MHz	10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
		2,4		40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel		1,3		SR.1.1 TDD	SR.1.1 TDD	SR.1.1 TDD
		2,4		SR.2.1 TDD	SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel		1,3		CR.1.1 TDD	CR.1.1 TDD	CR.1.1 TDD
		2,4		CR.2.1 TDD	CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET Reference Channel		1,3		CCR.1.1 TDD	CCR.1.1 TDD	CCR.1.1 TDD
		2,4		CCR.2.1 TDD	CCR.2.1 TDD	CCR.2.1 TDD
SSB configuration		1,3		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
		2,4		SSB.2 FR1	SSB.2 FR1	SSB.2 FR1
OCNG Patterns		1~4		OP.1	OP.1	OP.1
TRS configuration		1,3		TRS.1.1 TDD	TRS.1.1 TDD	TRS.1.1 TDD
		2,4		TRS.1.2 TDD	TRS.1.2 TDD	TRS.1.2 TDD
Initial BWP Configuration		1~4		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration		1~4		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
SMTC configuration		1~4		SMTC.1	SMTC.1	SMTC.1
Time offset between DL from serving cell and SRS from test system		1~4	µs	17.67	17.67	17.67
EPRE ratio of PSS to SSS		1~4	dB	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS Note 1						
EPRE ratio of OCNG to OCNG DMRS Note 1						
N_{oc} Note2	NR_TDD_FR1_A Note3	1,3	dBm/15kHz	-106	-88	-114
	NR_TDD_FR1_C					-113
	NR_TDD_FR1_D					-112.5
	NR_TDD_FR1_E					-112
	NR_TDD_FR1_A Note3	2,4		Not applicable Note4	-91	-114
	NR_TDD_FR1_C					-113

	NR_TDD_FR1_D					-112.5
	NR_TDD_FR1_E					-112
N_{oc} Note2	NR_TDD_FR1_A Note3	1,3	dBm/SRS SCS	-106	-88	-114
	NR_TDD_FR1_C					-113
	NR_TDD_FR1_D					-112.5
	NR_TDD_FR1_E					-112
	NR_TDD_FR1_A Note3	2,4		Not applicable Note4	-88	-111
	NR_TDD_FR1_C					-110
	NR_TDD_FR1_D					-109.5
	NR_TDD_FR1_E					-109

Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification
Note 4: Test 1 is not used when testing with 30kHz SSB SCS

Table A.4.7.6.1.2-2: FR1 test parameters for SRS-RSRP accuracy for neighbour cell UE

Parameter		Config	Unit	Test 1	Test 2	Test 3
N_{oc} Note2	NR_TDD_FR1_A NOTE 3	1,3	dBm/15kHz	-106	-88	-114
	NR_TDD_FR1_C					-113
	NR_TDD_FR1_D					-112.5
	NR_TDD_FR1_E					-112
	NR_TDD_FR1_A NOTE 5	2,4		Not applicable Note 6	-91	-114
	NR_TDD_FR1_C					-113
	NR_TDD_FR1_D					-112.5
	NR_TDD_FR1_E					-112
N_{oc} Note2	NR_TDD_FR1_A NOTE 5	1,3	dBm/SRS SCS	-106	-88	-114
	NR_TDD_FR1_C					-113
	NR_TDD_FR1_D					-112.5
	NR_TDD_FR1_E					-112
	NR_TDD_FR1_A NOTE 5	2,4		Not applicable Note 6	-88	-111
	NR_TDD_FR1_C					-110
	NR_TDD_FR1_D					-109.5
	NR_TDD_FR1_E					-109
$\hat{E}_s/I_{ot}$ on SRS		1~4	dB	1	1	1
SRS RSRP Note3	NR_TDD_FR1_A NOTE 5	1,3	dBm/SRS SCS	-105	-87	-113
	NR_TDD_FR1_C					-112
	NR_TDD_FR1_D					-111.5
	NR_TDD_FR1_E					-111
	NR_TDD_FR1_A NOTE 5	2,4		Not applicable Note 6	-87	-110
	NR_TDD_FR1_C					-109
	NR_TDD_FR1_D					-108.5
	NR_TDD_FR1_E					-108

Io Note3	NR_TDD_FR1_A NOTE 5	1,3	dBm/9.36 MHz	-74.51	-56.51	-82.51
	NR_TDD_FR1_C					-81.51
	NR_TDD_FR1_D					-81.01
	NR_TDD_FR1_E					-79.51
	NR_TDD_FR1_A NOTE 5	2,4	dBm/38.16 MHz	Not applicable Note 6	-53.42	-76.42
	NR_TDD_FR1_C					-75.42
	NR_TDD_FR1_D					-74.92
	NR_TDD_FR1_E					-74.42
$\hat{E}_s / N_{oc}$ on SRS		1~4	dB	1	1	1
Propagation condition		1~4		AWGN	AWGN	AWGN
Antenna configuration		1~4		1x2	1x2	1x2
SRS configuration		1,3		SRSConf.1	SRSConf.1	SRSConf.1
		2,4		SRSConf.2	SRSConf.2	SRSConf.2

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of the test.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification
Note 6: Test 1 is not used when testing with 30kHz SSB SCS

Table A.4.7.6.1.2-3: SRS configuration parameters for FR1 SRS-RSRP accuracy

	Field	SRSConf.1	SRSConf.2
SRS-ResourceSet	srs-ResourceSetId	0	0
	srs-ResourceIdList	0	0
	resourceType	Periodic	Periodic
	Usage	Codebook	Codebook
SRS-Resource	SRS-ResourceId	0	0
	nrofSRS-Ports	Port1	Port1
	transmissionComb	n2	n2
	combOffset-n2	0	0
	cyclicShift-n2	0	0
	resourceMapping startPosition	0	0
	resourceMapping nrofSymbols	n1	n1
	resourceMapping repetitionFactor	n1	n1
	freqDomainPosition	0	0
	freqDomainShift	0	0
	freqHopping c-SRS	12	12
	freqHopping b-SRS	0	0
	freqHopping b-hop	0	0
	groupOrSequenceHopping	Neither	Neither
	resourceType	Periodic	Periodic
	periodicityAndOffset-p	sl20, 9	sl40, 19
	sequenceId	0	0

A.4.7.6.1.3 Test Requirements

The SRS-RSRP measurement accuracy shall fulfil the requirements in clauses 10.1.22.1.1.

A.4.7.6.2 EN-DC CLI-RSSI measurement accuracy with FR1 serving cell

A.4.7.6.2.1 Test Purpose and Environment

The purpose of this test is to verify that the CLI-RSSI measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 10.1.22.2.1 with the testing configurations for NR cells in Table A.4.7.6.2.1-1.

Table A.4.7.6.2.1-1: Applicable NR configurations for FR1 CLI-RSSI accuracy test

Config	Description
1	LTE FDD, NR 15 kHz SRS SCS, 10 MHz bandwidth, TDD duplex mode
2	LTE FDD, NR 30kHz SRS SCS, 40 MHz bandwidth, TDD duplex mode
3	LTE TDD, NR 15 kHz SRS SCS, 10 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 30kHz SRS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.4.7.6.2.2 Test parameters

In this set of test cases there are two cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.4.7.6.2.2-1 below.

Before the test UE is configured to perform CLI-RSSI measurement. There is no measurement gap configured in the test. During the test, the test system does not transmit PDCCH/PDSCH/OCNG on symbols for CLI-RSSI resource and on 1 data symbol before. The CLI-RSSI measurement resource configuration is in Table A.4.7.6.2.2-2.

Table A.4.7.6.2.2-1: FR1 test parameters for CLI-RSSI accuracy

Parameter	Config	Unit	Value
SSB GSCN	1~4		freq1
Duplex mode	1~4		TDD
TDD configuration	1,3		TDDConf.1.1
	2,4		TDDConf.2.1
$BW_{channel}$	1,3	MHz	10: $N_{RB,c}$ = 52
	2,4		40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1,3		SR.1.1 TDD
	2,4		SR.2.1 TDD
RMSI CORESET Reference Channel	1,3		CR.1.1 TDD
	2,4		CR.2.1 TDD
Dedicated CORESET Reference Channel	1,3		CCR.1.1 TDD
	2,4		CCR.2.1 TDD
SSB configuration	1,3		SSB.1 FR1
	2,4		SSB.2 FR1
OCNG Patterns Note6	1~4		OP.1
TRS configuration	1,3		TRS.1.1 TDD
	2,4		TRS.1.2 TDD
Initial BWP Configuration	1~4		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~4		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~4		SMTC.1

Time offset between DL from serving cell and OCNG from test system	1~4	μs	17.67
EPRE ratio of PSS to SSS	1~4	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} on CLI-RSSI measurement resource Note2	1,3	dBm/15kHz	-106
	2,4		-106
N_{oc} on CLI-RSSI measurement resource Note2	1,3	dBm/ BWP SCS	-106
	2,4		-103
$\hat{E}_s / I_{ot}$ on CLI-RSSI measurement resource	1~4	dB	-Infinity
RSRP on CLI-RSSI measurement resource Note3	1~4	dBm/ BWP SCS	-Infinity
Io on CLI-RSSI measurement resource Note3	1,3	dBm/9.36 MHz	-78.05
	2,4	dBm/38.16 MHz	-71.96
Io on CLI-RSSI measurement resource Note3	1,3	dBm/1.08 MHz	-87.43
	2,4		-87.44
$\hat{E}_s / N_{oc}$ on CLI-RSSI measurement resource	1~4	dB	-Infinity
Propagation condition	1~4		AWGN
Antenna configuration	1~4		1x2

Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification
Note 6: OCNG is not transmitted in the CLI-RSSI measurement resources.

Table A.4.7.6.2.2-2: CLI-RSSI measurement resource configuration for FR1 CLI-RSSI accuracy

	Field	Config	SRSConf.1
CLI-RSSI measurement resource	rssi-ResourceId	1~4	0
	rssi-SCS	1,3	15kHz
		2,4	30kHz
	startPRB	1~4	0
	nrofPRBs	1,3	52
		2,4	106
	startPosition	1~4	3
	nrofSymbols	1~4	11
	rssi-PeriodicityAndOffset	1,3	sl20, 9
		2,4	sl40, 19

A.4.7.6.2.3 Test Requirements

The CLI-RSSI measurement accuracy shall fulfil the requirements in clauses 10.1.22.2.1.

A.4.7.7 L1-SINR measurement for beam reporting

A.4.7.7.1 L1-SINR measurement with CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off

A.4.7.7.1.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clauses 9.8.4.1 and clause 10.1.27.1 for FR1 L1-SINR measurements based on CSI-RS with the testing configurations for NR cells in Table A.4.7.7.1.1-1, which configures the measurement resources for the CSI-RS based CMR and no dedicated IMR.

Table A.4.7.7.1.1-1: Applicable NR configurations for FR1 L1-SINR test with CSI-RS based CMR and no dedicated IMR configured

Config	Description
1	LTE FDD, NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30kHz CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30kHz CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.4.7.7.1.2 Test parameters

In this set of test cases there are two cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.4.7.7.1.2-1 below. The absolute and relative accuracy of L1-SINR measurements are tested by using the parameters in Table A.4.7.7.1.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured one CSI-RS resource set with two CSI-RS resources. UE is configured to perform RLM and BFD based on SSB 0 and 1. CSI-RS is not transmitted in the same OFDM symbols as SSB.

Table A.4.7.7.1.2-1: FR1 CSI-RS based L1-SINR test parameters

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1~6		freq1	freq1
Duplex mode	1,4		FDD	FDD
	2,5		TDD	TDD
	3,6		TDD	TDD
TDD Configuration	1,4		N/A	N/A
	2,5		TDDConf.1.1	TDDConf.1.1
	3,6		TDDConf.2.1	TDDConf.2.1
$BW_{channel}$	1,4	MHz	10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
	2,5		10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
	3,6		40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1,4		SR.1.1 FDD	SR.1.1 FDD
	2,5		SR.1.1 TDD	SR.1.1 TDD
	3,6		SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD	CR.1.1 FDD
	2,5		CR.1.1 TDD	CR.1.1 TDD
	3,6		CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD	CCR.1.1 FDD
	2,5		CCR.1.1 TDD	CCR.1.1 TDD
	3,6		CCR.2.1 TDD	CCR.2.1 TDD
SSB configuration	1,4		SSB.1 FR1	SSB.1 FR1
	2,5		SSB.1 FR1	SSB.1 FR1
	3,6		SSB.2 FR1	SSB.2 FR1
OCNG Patterns	1~6		OP.1	OP.1
TRS configuration	1,4		TRS.1.1 FDD	TRS.1.1 FDD
	2,5		TRS.1.1 TDD	TRS.1.1 TDD
	3,6		TRS.1.2 TDD	TRS.1.2 TDD
Initial BWP Configuration	1~6		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~6		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~6		SMTC.1	SMTC.1
CSI-RS	1,4		CSI-RS 1.2 FDD	CSI-RS 1.2 FDD
	2,5		CSI-RS 1.2 TDD	CSI-RS 1.2 TDD
	3,6		CSI-RS 2.2 TDD	CSI-RS 2.2 FDD
reportConfigType	1~6		periodic	periodic
reportQuantity-r16	1~6		cri-SINR-r16	cri-SINR-r16
nrofReportedRS	1~6		2	2
L1-RSRP reporting period	1~6		slot80	slot80
EPRE ratio of PSS to SSS	1~6	dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				

EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1~6	dBm/15kHz	-94.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2,4,5	dBm/CSI-RS SCS	-94.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3,6		-91.65	-114
	NR_FDD_FR1_B				-113.5
	NR_TDD_FR1_C				-114
	NR_FDD_FR1_D, NR_TDD_FR1_D				-112.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-112
	NR_FDD_FR1_F				-111.5
	NR_FDD_FR1_G				-111
	NR_FDD_FR1_H				-110.5
$\hat{E}_s/I_{ot}$		1~6	dB	10	-3
CSI-RS RSRP Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2,4,5	dBm/CSI-RS SCS	-84.65	-120
	NR_FDD_FR1_B				-119.5
	NR_TDD_FR1_C				-119
	NR_FDD_FR1_D, NR_TDD_FR1_D				-118.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-118
	NR_FDD_FR1_F				-117.5
	NR_FDD_FR1_G				-117
	NR_FDD_FR1_H				-116.5
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3,6		-81.65	-117

	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
Io Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2,4,5	dBm/9.36 MHz	-56.28	-87.28
	NR_FDD_FR1_B				-86.78
	NR_TDD_FR1_C				-86.28
	NR_FDD_FR1_D, NR_TDD_FR1_D				-85.78
	NR_FDD_FR1_E, NR_TDD_FR1_E				-85.28
	NR_FDD_FR1_F				-84.78
	NR_FDD_FR1_G				-84.28
	NR_FDD_FR1_H				-83.78
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3,6	dBm/38.16 MHz	-50.19	-81.19
	NR_FDD_FR1_B				-80.69
	NR_TDD_FR1_C				-80.19
	NR_FDD_FR1_D, NR_TDD_FR1_D				-79.69
	NR_FDD_FR1_E, NR_TDD_FR1_E				-79.19
	NR_FDD_FR1_F				-78.69
	NR_FDD_FR1_G				-78.19
	NR_FDD_FR1_H				-77.69
$\hat{E}_s / N_{oc}$		1~6	dB	10	-3
Propagation condition		1~6		AWGN	AWGN
Antenna configuration		1~6		1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification

A.4.7.7.1.3 Test Requirements

The L1-SINR measurement accuracy for CSI-RS#0 and CSI-RS#1 of Cell 2 shall fulfil the requirements in clauses 10.1.27.1.

A.4.7.7.2 L1-SINR measurement with SSB based CMR and dedicated IMR

A.4.7.7.2.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-SINR measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 9.8.4.2 and clause 10.1.27.2 for L1-SINR measurements with SSB based CMR and CSI-IM based IMR, with the testing configurations for NR cells in Table A.4.7.7.2.1-1.

Table A.4.7.7.2.1-1: Applicable NR configurations for FR1 L1-SINR measurement test with SSB based CMR and CSI-IM based IMR

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.4.7.7.2.2 Test parameters

In this set of test cases there are two cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.4.7.7.2.2-1 below. The absolute accuracy of L1-SINR measurements are tested by using the parameters in Table A.4.7.7.2.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured one SSB resource set with two SSB resources and one CSI-IM resource set with two CSI-IM resource. UE is configured to perform RLM and BFD measurement based on the SSB resources 0 and 1. UE is configured to perform L1-SINR measurement based on the SSBs as CMR and the CSI-IM resources as IMR.

Table A.4.7.7.2.2-1: FR1 L1-SINR measurement test parameters with SSB based CMR and CSI-IM based IMR

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1~6		freq1	freq1
Duplex mode	1,4		FDD	FDD
	2,5		TDD	TDD
	3,6		TDD	TDD
TDD Configuration	1,4		N/A	N/A
	2,5		TDDConf.1.1	TDDConf.1.1
	3,6		TDDConf.2.1	TDDConf.2.1
$BW_{channel}$	1,4	MHz	10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
	2,5		10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
	3,6		40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1,4		SR.1.1 FDD	SR.1.1 FDD
	2,5		SR.1.1 TDD	SR.1.1 TDD
	3,6		SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD	CR.1.1 FDD
	2,5		CR.1.1 TDD	CR.1.1 TDD
	3,6		CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD	CCR.1.1 FDD
	2,5		CCR.1.1 TDD	CCR.1.1 TDD
	3,6		CCR.2.1 TDD	CCR.2.1 TDD

SSB configuration		1,4		SSB.3 FR1	SSB.3 FR1
		2,5		SSB.3 FR1	SSB.3 FR1
		3,6		SSB.4 FR1	SSB.4 FR1
CSI-IM configuration		1,4		CSI-IM 1.1 FDD	CSI-IM 1.1 FDD
		2,5		CSI-IM 1.1 TDD	CSI-IM 1.1 TDD
		3,6		CSI-IM 2.1 TDD	CSI-IM 2.1 TDD
OCNG Patterns		1~6		OP.1	OP.1
TRS configuration		1,4		TRS.1.1 FDD	TRS.1.1 FDD
		2,5		TRS.1.1 TDD	TRS.1.1 TDD
		3,6		TRS.1.2 TDD	TRS.1.2 TDD
Initial BWP Configuration		1~6		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration		1~6		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
SMTC configuration		1~6		SMTC.1	SMTC.1
reportConfigType		1~6		periodic	periodic
reportQuantity-r16		1~6		ssb-Index-SINR-r16	ssb-Index-SINR-r16
Number of reported RS		1~6		2	2
L1-SINR reporting period		1~6		slot80	slot80
EPRE ratio of PSS to SSS		1~6	dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1~6	dBm/15kHz	-94.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2,4,5	dBm/SSB SCS	-94.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5

	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3,6		-91.65	-114
	NR_FDD_FR1_B				-113.5
	NR_TDD_FR1_C				-114
	NR_FDD_FR1_D, NR_TDD_FR1_D				-112.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-112
	NR_FDD_FR1_F				-111.5
	NR_FDD_FR1_G				-111
	NR_FDD_FR1_H				-110.5
$\hat{E}_s/I_{ot}$		1~6	dB	10	-3
SSB RSRP Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2,4,5	dBm/SSB SCS	-84.65	-120
	NR_FDD_FR1_B				-119.5
	NR_TDD_FR1_C				-119
	NR_FDD_FR1_D, NR_TDD_FR1_D				-118.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-118
	NR_FDD_FR1_F				-117.5
	NR_FDD_FR1_G				-117
	NR_FDD_FR1_H				-116.5
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3,6		-81.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
Io Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2,4,5	dBm/9.36 MHz	-56.28	-87.28
	NR_FDD_FR1_B				-86.78
	NR_TDD_FR1_C				-86.28
	NR_FDD_FR1_D, NR_TDD_FR1_D				-85.78
	NR_FDD_FR1_E, NR_TDD_FR1_E				-85.28
	NR_FDD_FR1_F				-84.78
	NR_FDD_FR1_G				-84.28
	NR_FDD_FR1_H				-83.78

	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3,6	dBm/38.16 MHz	-50.19	-81.19
	NR_FDD_FR1_B				-80.69
	NR_TDD_FR1_C				-80.19
	NR_FDD_FR1_D, NR_TDD_FR1_D				-79.69
	NR_FDD_FR1_E, NR_TDD_FR1_E				-79.19
	NR_FDD_FR1_F				-78.69
	NR_FDD_FR1_G				-78.19
	NR_FDD_FR1_H				-77.69
$\hat{E}_s / N_{oc}$		1~6	dB	10	-3
Propagation condition		1~6		AWGN	AWGN
ntenna configuration		1~6		1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification					

A.4.7.7.2.3 Test Requirements

The L1-SINR measurement accuracy for SSB#0+CSI-IM#0 and SSB#1+CSI-IM#1 of Cell 2 shall fulfil the requirements in clauses 10.1.27.2.

A.4.7.7.3 L1-SINR measurement with CSI-RS based CMR and dedicated IMR

A.4.7.7.3.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-SINR measurement accuracy is within the specified limits. This test will partly verify the requirements in Clauses 9.8.4.3 and clause 10.1.27.3 for L1-SINR measurements based on CSI-RS as both CMR and IMR with the testing configurations for NR cells in Table A.4.7.7.3.1-1.

Table A.4.7.7.3.1-1: Applicable NR configurations for FR1 L1-SINR measurement test with CSI-RS based both CMR based IMR

Config	Description
1	LTE FDD, NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30kHz CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30kHz CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band.	

A.4.7.7.3.2 Test parameters

In this set of test cases there are two cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.4.7.7.3.2-1 below. The absolute and relative accuracy of L1-SINR measurements are tested by using the parameters in Table A.4.7.7.3.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured two CSI-RS resource sets with two CSI-RS resources for each set. UE is configured to perform RLM and BFD based on SSB 0 and 1. CSI-RS is not transmitted in the same OFDM symbols as SSB. UE is configured to perform L1-SINR measurement based on the configured CSI-RS as both CMR and IMR.

Table A.4.7.7.3.2-1: FR1 L1-SINR measurement test with CSI-RS based both CMR and IMR

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1~6		freq1	freq1
Duplex mode	1,4		FDD	FDD
	2,5		TDD	TDD
	3,6		TDD	TDD
TDD Configuration	1,4		N/A	N/A
	2,5		TDDConf.1.1	TDDConf.1.1
	3,6		TDDConf.2.1	TDDConf.2.1
$BW_{channel}$	1,4	MHz	10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
	2,5		10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
	3,6		40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1,4		SR.1.1 FDD	SR.1.1 FDD
	2,5		SR.1.1 TDD	SR.1.1 TDD
	3,6		SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD	CR.1.1 FDD
	2,5		CR.1.1 TDD	CR.1.1 TDD
	3,6		CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD	CCR.1.1 FDD
	2,5		CCR.1.1 TDD	CCR.1.1 TDD
	3,6		CCR.2.1 TDD	CCR.2.1 TDD
SSB configuration	1,4		SSB.1 FR1	SSB.1 FR1
	2,5		SSB.1 FR1	SSB.1 FR1
	3,6		SSB.2 FR1	SSB.2 FR1
OCNG Patterns	1~6		OP.1	OP.1
TRS configuration	1,4		TRS.1.1 FDD	TRS.1.1 FDD
	2,5		TRS.1.1 TDD	TRS.1.1 TDD
	3,6		TRS.1.2 TDD	TRS.1.2 TDD
Initial BWP Configuration	1~6		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~6		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~6		SMTC.1	SMTC.1
CSI-RS configuration as CMR	1,4		CSI-RS 1.2 FDD	CSI-RS 1.2 FDD
	2,5		CSI-RS 1.2 TDD	CSI-RS 1.2 TDD
	3,6		CSI-RS 2.2 TDD	CSI-RS 2.2 FDD
CSI-RS configuration as IMR	1,4		CSI-RS 1.3A FDD	CSI-RS 1.3A FDD
	2,5		CSI-RS 1.3A TDD	CSI-RS 1.3A TDD
	3,6		CSI-RS 2.3A TDD	CSI-RS 2.3A TDD
reportConfigType	1~6		periodic	periodic
reportQuantity-r16	1~6		cri-SINR-r16	cri-SINR-r16
nrofReportedRS	1~6		2	2
L1-RSRP reporting period	1~6		slot80	slot80
EPRE ratio of PSS to SSS	1~6	dB	0	0

EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1~6	dBm/15kHz	-94.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2,4,5	dBm/CSI-RS SCS	-94.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3,6		-91.65	-114
	NR_FDD_FR1_B				-113.5
	NR_TDD_FR1_C				-114
	NR_FDD_FR1_D, NR_TDD_FR1_D				-112.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-112
	NR_FDD_FR1_F				-111.5
	NR_FDD_FR1_G				-111
	NR_FDD_FR1_H				-110.5
$\hat{E}_s / I_{ot}$		1~6	dB	10	0
CSI-RS RSRP Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2,4,5	dBm/CSI-RS SCS	-84.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5

	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3,6		-81.65	-114
	NR_FDD_FR1_B				-113.5
	NR_TDD_FR1_C				-114
	NR_FDD_FR1_D, NR_TDD_FR1_D				-112.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-112
	NR_FDD_FR1_F				-111.5
	NR_FDD_FR1_G				-111
	NR_FDD_FR1_H				-110.5
Io Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2,4,5	dBm/9.36 MHz	-56.28	-87.28
	NR_FDD_FR1_B				-86.78
	NR_TDD_FR1_C				-86.28
	NR_FDD_FR1_D, NR_TDD_FR1_D				-85.78
	NR_FDD_FR1_E, NR_TDD_FR1_E				-85.28
	NR_FDD_FR1_F				-84.78
	NR_FDD_FR1_G				-84.28
	NR_FDD_FR1_H				-83.78
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3,6	dBm/38.16 MHz	-50.19	-81.19
	NR_FDD_FR1_B				-80.69
	NR_TDD_FR1_C				-80.19
	NR_FDD_FR1_D, NR_TDD_FR1_D				-79.69
	NR_FDD_FR1_E, NR_TDD_FR1_E				-79.19
	NR_FDD_FR1_F				-78.69
	NR_FDD_FR1_G				-78.19
	NR_FDD_FR1_H				-77.69
$\hat{E}_s / N_{oc}$		1~6	dB	10	0
Propagation condition		1~6		AWGN	AWGN
Antenna configuration		1~6		1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification

A.4.7.7.3.3 Test Requirements

The L1-SINR measurement accuracy for CSI-RS#0+CSI-RS#2 and CSI-RS#1+CSI-RS#3 of Cell 2 shall fulfil the requirements in clauses 10.1.27.3.

A.4.7.8 CSI-RSRP

A.4.7.8.1 EN-DC Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.4.7.8.1.1 Test Purpose and Environment

The purpose of this test is to verify that the CSI-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 10.1.2.3.1 and 10.1.2.3.2 for intra-frequency CSI-RS based L3 measurements.

A.4.7.8.1.2 Test parameters

In this set of test cases all NR cells are on the same carrier frequency. Supported test configurations are shown in table A.4.7.8.1.2-1. Both absolute and relative accuracy of CSI-RSRP intra-frequency measurements are tested by using the parameters in A.4.7.8.1.2-2. The configuration of cell 1 (E-UTRA PCell) is specified in clause A.3.7.2.1. In all test cases, Cell 2 is the PSCell and Cell 3 is the target cell.

Table A.4.7.8.1.2-1: CSI-RSRP Intra frequency CSI-RSRP supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations for each supported band	

Table A.4.7.8.1.2-2: CSI-RSRP Intra frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 2	Cell 3	Cell 2	Cell 3	Cell 2	Cell 3
Physical cell ID			489	0	489	0	489	0
SSB ARFCN			freq1		freq1		freq1	
Duplex mode	Config 1,4		FDD					
	Config 2,3,5,6		TDD					
TDD configuration	Config 1,4		Not Applicable					
	Config 2,5		TDDConf.1.1					
	Config 3,6		TDDConf.2.1					
$BW_{channel}$	Config 1,4	MHz	10: $N_{RB,c}$ = 52					
	Config 2,5		10: $N_{RB,c}$ = 52					
	Config 3,6		40: $N_{RB,c}$ = 106					
Downlink initial BWP configuration			DLBWP.0.1					
Downlink dedicated BWP configuration			DLBWP.1.1					
Uplink initial BWP configuration			ULBWP.0.1					
Uplink dedicated BWP configuration			ULBWP.1.1					
TRS configuration	Config 1,4		TRS.1.1 FDD	NA	TRS.1.1 FDD	NA	TRS.1.1 FDD	NA
	Config 2,5		TRS.1.1 TDD	NA	TRS.1.1 TDD	NA	TRS.1.1 TDD	NA

	Config 3,6		TRS.1.2 TDD	NA	TRS.1.2 TDD	NA	TRS.1.2 TDD	NA
DRX Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2,5		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3,6		SR2.1 TDD		SR2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	-
	Config 2,5		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
	Config 3,6		CR2.1 TDD		CR2.1 TDD		CR2.1 TDD	
Control Channel RMC	Config 1,4		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2,5		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3,6		CCR2.1 TDD		CCR2.1 TDD		CCR2.1 TDD	
SSB configuration	Config 1,4		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
	Config 2,5		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
	Config 3,6		SSB.2 FR1	SSB.2 FR1	SSB.2 FR1	SSB.2 FR1	SSB.2 FR1	SSB.2 FR1
CSI-RS configuration for RRM	Config 1,4		CSI-RS.RRM.FR1.1 FDD					
	Config 2,5		CSI-RS.RRM.FR1.1 TDD					
	Config 3,6		CSI-RS.RRM.FR1.2 TDD					
Time offset with Cell 2	Config 1,2,4,5	µs	-	4.7	-	4.7	-	4.7
	Config 3,6	µs	-	2.35	-	2.35	-	2.35
SMTC configuration	Config 1,4		SMTC.2					
	Config 2,3,5,6		SMTC.1					
OCNG Patterns			OP.1					
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15 kHz					
	Config 3,6		30kHz					
EPRE ratio of PSS to SSS		dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} Note2	Config 1,2,4,5	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/15KhZ	-106		-88		-114
		NR_FDD_FR1_B						-113.5
		NR_TDD_FR1_C						-113
		NR_FDD_FR1_D, NR_TDD_FR1_D						-112.5
		NR_FDD_FR1_E, NR_TDD_FR1_E						-112
		NR_FDD_FR1_F						-111.5

		NR_FDD_FR1_G						-111	
		NR_FDD_FR1_H						-110.5	
	Config 3,6	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		Not applicable Note 5		-94		-114	
		NR_FDD_FR1_B						-113.5	
		NR_TDD_FR1_C						-113	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-112.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-112	
		NR_FDD_FR1_F						-111.5	
		NR_FDD_FR1_G						-111	
		NR_FDD_FR1_H						-110.5	
N_{oc} Note2	Config 1,2,4,5		dBm/SCS	-106		-88		Same as Noc/15kHz	
	Config 3,6	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		Not applicable Note 5		-91		-111	
		NR_FDD_FR1_B						-110.5	
		NR_TDD_FR1_C						-110	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-109.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-109	
		NR_FDD_FR1_F						-108.5	
		NR_FDD_FR1_G						-108	
		NR_FDD_FR1_H						-107.5	
$\hat{E}_s / I_{ot}$			dB	2.46	-5.97	2.46	-5.97	-0.01	-4.76
$\hat{E}_s / N_{oc}$			dB	6	1	6	1	3	0
CSI-RSRP Note3	Config 1,2,4,5	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/SCS	-100	-105	-82	-87	-111.00	-114.00
		NR_FDD_FR1_B						-110.50	-113.50
		NR_TDD_FR1_C						-110.00	-113.00
		NR_FDD_FR1_D, NR_TDD_FR1_D						-109.50	-112.50
		NR_FDD_FR1_E, NR_TDD_FR1_E						-109.00	-112.00
		NR_FDD_FR1_F						-108.50	-111.50
		NR_FDD_FR1_G						-108.00	-111.00
		NR_FDD_FR1_H						-107.50	-110.50
	Config 3,6	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		- Not applicable Note 5	Not applicable Note 5	-85	-90	-108.00	-111.00
		NR_FDD_FR1_B						-107.50	-110.50
		NR_TDD_FR1_C						-107.00	-110.00
		NR_FDD_FR1_D, NR_TDD_FR1_D						-106.50	-109.50
		NR_FDD_FR1_E, NR_TDD_FR1_E						-106.00	-109.00

		NR_FDD_FR1_F						-105.50	-108.50
		NR_FDD_FR1_G						-105.00	-108.00
		NR_FDD_FR1_H						-104.50	-107.50
Io[Note3]	Config 1,2,4,5	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 9.36MHz	-70.09		-52.09		-80.03	
		NR_FDD_FR1_B						-79.53	
		NR_TDD_FR1_C						-79.03	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-78.53	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-78.03	
		NR_FDD_FR1_F						-77.53	
		NR_FDD_FR1_G						-77.03	
		NR_FDD_FR1_H						-76.53	
	Config 3,6	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 38.16MHz	Not applicable[Note 5]		-51.99		-73.94	
		NR_FDD_FR1_B						-73.44	
		NR_TDD_FR1_C						-72.94	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-72.44	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-71.94	
		NR_FDD_FR1_F						-71.44	
		NR_FDD_FR1_G						-70.94	
		NR_FDD_FR1_H						-70.44	
Propagation condition			-	AWGN					
Antenna configuration				1x2					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: CSI-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: Subtest 1 is not used when testing with 30kHz SSB SCS

Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification

A.4.7.8.1.3 Test Requirements

The CSI-RSRP measurement accuracy for cell 2 and cell 3 shall fulfill absolute requirement in clause 10.1.2.3.1 and relative requirement in clause 10.1.2.3.2.

A.4.7.8.2 EN-DC inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.4.7.8.2.1 Test Purpose and Environment

The purpose of this test is to verify that the CSI-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 10.1.4.3.1 and 10.1.4.3.2 for inter-frequency measurements with the testing configurations in Table A.4.7.8.2.1-1.

Table A.4.7.8.2.1-1: Applicable NR configurations for FR1 inter-frequency CSI-RSRP accuracy test

Config	Description
1	LTE FDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations on each supported band	

A.4.7.8.2.2 Test parameters

In this set of test cases there are three cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and a FR1 neighbour cell (Cell 3) on a different frequency than the PSCell. The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 and Cell 3 are given in Table A.4.7.8.2.2-1 below. Both absolute and relative accuracy of CSI-RSRP inter-frequency measurements are tested by using the parameters in Table A.4.7.8.2.2-1. The inter-frequency measurements are supported by a measurement gap.

Table A.4.7.8.2.2-1: CSI-RSRP inter-frequency test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN	1~6		freq1	freq2	freq1	freq2
$BW_{channel}$	1,4	MHz	10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
	2,5		10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
	3,6		40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
Gap pattern ID			0		0	
Duplex mode	1,4		FDD		FDD	
	2,5		TDD		TDD	
	3,6		TDD		TDD	
TDD configuration	1,4		N/A		N/A	
	2,5		TDDConf.1.1		TDDConf.1.1	
	3,6		TDDConf.2.1		TDDConf.2.1	
PDSCH Reference measurement channel	1,4		SR.1.1 FDD	-	SR.1.1 FDD	-
	2,5		SR.1.1 TDD		SR.1.1 TDD	
	3,6		SR.2.1 FDD		SR.2.1 FDD	
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD	-	CR.1.1 FDD	-
	2,5		CR.1.1 TDD	-	CR.1.1 TDD	-
	3,6		CR.2.1 FDD	-	CR.2.1 FDD	-
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	2,5		CCR.1.1 TDD	-	CCR.1.1 TDD	-
	3,6		CCR.2.1 TDD	-	CCR.2.1 TDD	-
SSB configuration	1,4		SSB.1 FR1		SSB.1 FR1	
	2,5		SSB.1 FR1		SSB.1 FR1	
	3,6		SSB.2 FR1		SSB.2 FR1	
CSI-RS configuration for RRM	1,4		CSI-RS.RRM.FR1.1 FDD			
	2,5		CSI-RS.RRM.FR1.1 TDD			
	3,6		CSI-RS.RRM.FR1.2 TDD			
OCNG Patterns	1~6		OP.1		OP.1	

TRS configuration		1,4		TRS.1.1 FDD	-	TRS.1.1 FDD	-	
		2,5		TRS.1.1 TDD		TRS.1.1 TDD		
		3,6		TRS.1.2 TDD		TRS.1.2 TDD		
Initial BWP Configuration		1~6		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1		
Dedicated BWP configuration		1~6		DLBWP.1.1 ULBWP.1.1		DLBWP.1.1 ULBWP.1.1		
Time offset with Cell 2		1,2,4,5	µs	-	4.7	-	4.7	
		3,6	µs	-	2.35	-	2.35	
SMTC configuration		1,4		SMTC.2		SMTC.2		
		2,3,5,6		SMTC.1		SMTC.1		
EPRE ratio of PSS to SSS		1~6	dB	0	0	0	0	
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH DMRS								
EPRE ratio of OCNG DMRS to SSSNote 1								
EPRE ratio of OCNG to OCNG DMRS Note 1								
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5,	1~6	dBm/15 kHz	-94.65		(N_{oc} for Cell 3 +8dB)	-115	
	NR_FDD_FR1_B						-114.5	
	NR_TDD_FR1_C						-114	
	NR_FDD_FR1_D, NR_TDD_FR1_D						-113.5	
	NR_FDD_FR1_E, NR_TDD_FR1_E						-113	
	NF_FDD_FR1_F						-112.5	
	NR_FDD_FR1_G						-112	
	NR_FDD_FR1_H						-111.5	
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5,	1,2,4,5	dBm/SSB SCS	-94.65		(N_{oc} for Cell 3 +8dB)	-115	
	NR_FDD_FR1_B						-114.5	
	NR_TDD_FR1_C						-114	
	NR_FDD_FR1_D, NR_TDD_FR1_D						-113.5	
	NR_FDD_FR1_E, NR_TDD_FR1_E						-113	
	NR_FDD_FR1_F						-112.5	
	NR_FDD_FR1_G						-112	

	NR_FDD_FR1_H						-111.5
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5, NR_SDL_FR1_A	3,6		-91.65		(N_{oc} for C 3 +8dB)	-112.00
	NR_FDD_FR1_B						-112.50
	NR_TDD_FR1_C						-112.00
	NR_FDD_FR1_D, NR_TDD_FR1_D						-111.50
	NR_FDD_FR1_E, NR_TDD_FR1_E						-111.00
	NR_FDD_FR1_F						-110.50
	NR_FDD_FR1_G						-110.00
	NR_FDD_FR1_H						-110.50
$\hat{E}_s/I_{ot}$		1~6	dB	10	10	13	-3
CSI-RSRP Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2,4,5	dBm/SCS	-84.65		(RSRP for Cell 3 +25dB)	-118.00
	NR_FDD_FR1_B						-117.50
	NR_TDD_FR1_C						-117.00
	NR_FDD_FR1_D, NR_TDD_FR1_D						-116.50
	NR_FDD_FR1_E, NR_TDD_FR1_E						-116.00
	NR_FDD_FR1_F						-115.50
	NR_FDD_FR1_G						-115.00
	NR_FDD_FR1_H						-114.50
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5,	3,6		-81.65		(RSRP for Cell 3 +25dB)	-115.00
	NR_FDD_FR1_B						-114.50
	NR_TDD_FR1_C						-114.00
	NR_FDD_FR1_D, NR_TDD_FR1_D						-113.50
	NR_FDD_FR1_E, NR_TDD_FR1_E						-113.00
	NR_FDD_FR1_F						-112.50
	NR_FDD_FR1_G						-112.00
	NR_FDD_FR1_H						-111.50
Io Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6,	1,2,4,5	dBm/ 9.36MHz	-56.28		(Io for Channel 3 +19.75dB)	-85.28
	NR_FDD_FR1_B						-84.78
	NR_TDD_FR1_C						-84.28
	NR_FDD_FR1_D, NR_TDD_FR1_D						-83.78

	NR_FDD_FR1_E, NR_TDD_FR1_E						-83.28
	NR_FDD_FR1_F						-82.78
	NR_FDD_FR1_G						-82.28
	NR_FDD_FR1_H						-81.78
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6,	3,6	dBm/ 38.16MHz	-50.19		(Io for Channel 3 +19.75dB)	-79.19
	NR_FDD_FR1_B						-78.69
	NR_TDD_FR1_C						-78.19
	NR_FDD_FR1_D, NR_TDD_FR1_D						-77.69
	NR_FDD_FR1_E, NR_TDD_FR1_E						-77.19
	NR_FDD_FR1_F						-76.69
	NR_FDD_FR1_G						-76.19
	NR_FDD_FR1_H						-75.69
$\hat{E}_s / N_{oc}$		1~6	dB	10	10	13	-3
Propagation condition		1~6	-	AWGN		AWGN	
Antenna configuration				1x2		1x2	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: CSI-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5 The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification

A.4.7.8.2.3 Test Requirements

The CSI-RSRP measurement accuracy for Cell 2 and Cell 3 shall fulfil the Absolute requirement in clause 10.1.4.2.1 and Relative requirement in clause 10.1.4.2.2.

A.4.7.9 CSI-RSRQ

A.4.7.9.1 EN-DC Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.4.7.9.1.1 Test Purpose and Environment

The purpose of this test is to verify that the CSI-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.7.

A.4.7.9.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table A.4.7.9.1.2-1. The absolute accuracy of CSI-RSRQ intra-frequency measurement is test by using the parameters in Table A.4.7.9.1.2-2. The configuration of cell 1 (E-UTRA PCell) is specified in clause A.3.7.2.1. In all test cases, Cell 2 is the PSCell and Cell 3 is the target cell.

Table A.4.7.9.1.2-1: CSI-RSRQ Intra frequency CSI-RSRQ supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB and CSI-RS SCS, 10MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB and CSI-RS SCS, 10MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30kHz SSB and CSI-RS SCS, 40MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB and CSI-RS SCS, 10MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB and CSI-RS SCS, 10MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30kHz SSB and CSI-RS SCS, 40MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table A.4.7.9.1.2-2: CSI-RSRQ Intra frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 2	Cell 3	Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN			freq1		freq1		freq1	
Duplex mode	Config 1,4		FDD					
	Config 2,3,5,6		TDD					
TDD configuration	Config 1,4		Not Applicable					
	Config 2,5		TDDConf.1.1					
	Config 3,6		TDDConf.2.1					
$BW_{channel}$	Config 1,4	MHz	10: $N_{RB,c}$ = 52					
	Config 2,5		10: $N_{RB,c}$ = 52					
	Config 3,6		40: $N_{RB,c}$ = 106					
BWP configuration	Initial DL BWP		DLBWP.0.1					
	Dedicated DL BWP		DLBWP.1.1					
	Initial UL BWP		ULBWP.0.1					
	Dedicated UL BWP		ULBWP.1.1					
DRX Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2,5		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3,6		SR2.1 TDD		SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	
	Config 2,5		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
	Config 3,6		CR.2.1 TDD		CR.2.1 TDD		CR.2.1 TDD	
Control Channel RMC	Config 1,4		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2,5		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3,6		CCR.2.1 TDD		CCR.2.1 TDD		CCR.2.1 TDD	
TRS configuration	Config 1,4		TRS.1.1 FDD	-	TRS.1.1 FDD	-	TRS.1.1 FDD	-
	Config 2,5		TRS.1.1 TDD		TRS.1.1 TDD		TRS.1.1 TDD	

				TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD	
OCNG Patterns				OP. 1					
Time offset with Cell 2	Config 1,2,4,5		µs	-	4.7	-	4.7	-	4.7
	Config 3,6		µs	-	2.35	-	2.35	-	2.35
SMTC configuration	Config 1,4			SMTC.2					
	Config 2,3,5,6			SMTC.1					
SSB configuration	Config 1,2,4,5			SSB.1 FR1					
	Config 3,6			SSB.2 FR1					
CSI-RS configuration for RRM	Config 1,4			CSI-RS.RRM.FR1.1 FDD					
	Config 2, 5			CSI-RS.RRM.FR1.1 TDD					
	Config 3, 6			CSI-RS.RRM.FR1.2 TDD					
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5		kHz	15 kHz					
	Config 3,6			30kHz					
EPRE ratio of PSS to SSS			dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2	Config 1,2,4,5	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 7	dBm/15kHz	-85		-101		-114	
		NR_FDD_FR1_B						-113.5	
		NR_TDD_FR1_C						-113	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-112.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-112	
		NR_FDD_FR1_F						-111.5	
		NR_FDD_FR1_G						-111	
		NR_FDD_FR1_H						-110.5	
	Config 3,6	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 7		-91		-		-114	
		NR_FDD_FR1_B						-113.5	
		NR_TDD_FR1_C						-113	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-112.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-112	
		NR_FDD_FR1_F						-111.5	
		NR_FDD_FR1_G						-111	
		NR_FDD_FR1_H						-110.5	
N_{oc} Note2	Config 1,2,4,5	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 7	dBm/SCS	-85		-101		-114	
		NR_FDD_FR1_B						-113.5	
		NR_TDD_FR1_C						-113	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-112.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-112	
		NR_FDD_FR1_F						-111.5	
		NR_FDD_FR1_G						-111	
		NR_FDD_FR1_H						-110.5	

	Config 3,6	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 7		-88		-		-111	
		NR_FDD_FR1_B						-110.5	
		NR_TDD_FR1_C						-110	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-109.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-109	
		NR_FDD_FR1_F						-108.5	
		NR_FDD_FR1_G						-108	
		NR_FDD_FR1_H						-107.5	
$\hat{E}_s/I_{ot}$			dB	-1.76		-4.7		-5.46	-5.46
$\hat{E}_s/N_{oc}$			dB	3	3	-2.9	-2.9	-4	-4
CSI-RSRP Note3	Config 1,2,4,5	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 7	dBm/SCS	-82	-82	-103.9	-103.9	-118	-118
		NR_FDD_FR1_B						-117.5	-117.5
		NR_TDD_FR1_C						-117	-117
		NR_FDD_FR1_D, NR_TDD_FR1_D						-116.5	-116.5
		NR_FDD_FR1_E, NR_TDD_FR1_E						-116	-116
		NR_FDD_FR1_F						-115.5	-115.5
		NR_FDD_FR1_G						-115	-115
		NR_FDD_FR1_H						-114.5	-114.5
	Config 3,6	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 7		-85	-85	-	-	-115	-115
		NR_FDD_FR1_B						-114.5	-114.5
		NR_TDD_FR1_C						-114	-114
		NR_FDD_FR1_D, NR_TDD_FR1_D						-113.5	-113.5
		NR_FDD_FR1_E, NR_TDD_FR1_E						-113	-113
		NR_FDD_FR1_F						-112.5	-112.5
		NR_FDD_FR1_G						-112	-112
		NR_FDD_FR1_H						-111.5	-111.5
CSI-RSRQ Note3		NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 7	dB	-14.77	-14.77	-16.76	-16.76	-17.34	-17.34
		NR_FDD_FR1_B							
		NR_TDD_FR1_C							
		NR_FDD_FR1_D, NR_TDD_FR1_D							
		NR_FDD_FR1_E, NR_TDD_FR1_E							
		NR_FDD_FR1_F							
		NR_FDD_FR1_G							
		NR_FDD_FR1_H							
Io Note3	Config 1,2,4,5	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 7	dBm/ 9.36MHz	-50		-70		-83.5	
		NR_FDD_FR1_B						-83	
		NR_TDD_FR1_C						-82.5	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-82	

		NR_FDD_FR1_E, NR_TDD_FR1_E						-81.5	
		NR_FDD_FR1_F						-81	
		NR_FDD_FR1_G						-80.5	
		NR_FDD_FR1_H						-80	
	Config 3,6	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 7	dBm/ 38.16M Hz	-50		-		-77.4	
		NR_FDD_FR1_B						-76.9	
		NR_TDD_FR1_C						-76.4	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-75.9	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-75.4	
		NR_FDD_FR1_F						-74.9	
		NR_FDD_FR1_G						-74.4	
		NR_FDD_FR1_H						-73.9	
Propagation condition			-	AWGN	AWGN	AWGN	AWGN	AWGN	AWGN
Antenna configuration				1x2	1x2	1x2	1x2	1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: CSI-RSRQ, CSI-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: CSI-RSRQ, CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: NR operating band groups are as defined in Clause 3.5.2.
Note 6: Subtest 2 is not used when testing with 30kHz SSB and CSI-RS SCS
Note 7: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification

A.4.7.9.1.3 Test Requirements

The CSI-RSRQ measurement accuracy shall fulfil the requirements in clause 10.1.7.

A.4.7.9.2 EN-DC Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.4.7.9.2.1 Test Purpose and Environment

The purpose of this test is to verify that the CSI-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.9.1.1 and 10.1.9.1.2 for inter frequency measurement.

A.4.7.9.2.2 Test Parameters

In this test case the two NR cells (i.e., Cell 2 and Cell 3) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.4.7.9.2.2-1. Both absolute accuracy and relative accuracy requirements of CSI-RSRQ inter-frequency measurement are tested by using test parameters in Table A.4.7.9.2.2-2. In all test cases, Cell 2 is the PSCell and Cell 3 is target cell. Cell 1 is the E-UTRA cell which specific test parameters for this test case are specified in Table A.3.7.2.1-1.

Table A.4.7.9.2.2-1: CSI-RSRQ Inter frequency CSI-RSRQ supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode

4	LTE TDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.4.7.9.2.2-2: CSI-RSRQ Inter frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 2	Cell 3	Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN			freq1	freq2	freq1	freq2	freq1	freq2
Duplex mode	Config 1,4		FDD					
	Config 2,3,5,6		TDD					
TDD configuration	Config 1,4		Not Applicable					
	Config 2,5		TDDConf.1.1					
	Config 3,6		TDDConf.2.1					
$BW_{channel}$	Config 1,4	MHz	10: $N_{RB,c}$ = 52					
	Config 2,5		10: $N_{RB,c}$ = 52					
	Config 3,6		40: $N_{RB,c}$ = 106					
BWP BW	Config 1,4	MHz	10: $N_{RB,c}$ = 52					
	Config 2,5		10: $N_{RB,c}$ = 52					
	Config 3,6		40: $N_{RB,c}$ = 106					
DRX Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2,5		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3,6		SR.2.1 TDD		SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	-
	Config 2,5		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
	Config 3,6		CR.2.1 TDD		CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1,4		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2,5		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3,6		CCR.2.1 TDD		CCR.2.1 TDD		CCR.2.1 TDD	
TRS configuration	Config 1,4		TRS.1.1 FDD	-	TRS.1.1 FDD	-	TRS.1.1 FDD	-

	Config 2,5		TRS.1.1 TDD		TRS.1.1 TDD		TRS.1.1 TDD	
	Config 3,6		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD	
CSI-RS configuration for RRM	Config 1,4		CSI-RS.RRM.FR1.1 FDD					
	Config 2,5		CSI-RS.RRM.FR1.1 TDD					
	Config 3,6		CSI-RS.RRM.FR1.2 TDD					
OCNG Patterns			OCNG pattern 1					
Time offset with Cell 2	Config 1,2,4,5	µs	-	4.7	-	4.7	-	4.7
	Config 3,6	µs	-	2.35	-	2.35	-	2.35
SMTC configuration	Config 1,4		SMTC.2					
	Config 2,3,5,6		SMTC.1					
SSB configuration	Config 1,2,4,5		SSB.1 FR1					
	Config 3,6		SSB.2 FR1					
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15 kHz					
	Config 3,6		30 kHz					
EPRE ratio of PSS to SSS		dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} Note2	Config 1,2,4,5	NR_FDD_FR1_A NR_TDD_FR1_A NR_SDL_FR1_A	dBm/15 kHz	-80.18	-80.18	-106	-106	-116	-116
		NR_FDD_FR1_B						-115.5	-115.5
		NR_TDD_FR1_C						-115	-115
		NR_FDD_FR1_D NR_TDD_FR1_D						-114.5	-114.5
		NR_FDD_FR1_E NR_TDD_FR1_E						-114	-114
		NR_FDD_FR1_G						-113	-113
		NR_FDD_FR1_H						-112.5	-112.5
	Config 3,6	NR_FDD_FR1_A NR_TDD_FR1_A NR_SDL_FR1_A	dBm/15 kHz	-86.27	-86.27	-113	-113	-116	-116
		NR_FDD_FR1_B						-115.5	-115.5
		NR_TDD_FR1_C						-115	-115
		NR_FDD_FR1_D NR_TDD_FR1_D						-114.5	-114.5
		NR_FDD_FR1_E NR_TDD_FR1_E						-114	-114
		NR_FDD_FR1_G						-113	-113

		NR_FDD_FR1_H						-112.5	-112.5
N_{oc} Note2	Config 1,2,4,5	NR_FDD_FR1_A NR_TDD_FR1_A NR_SDL_FR1_A	dBm/SCS	-80.18	-80.18	-106	-106	-116	-116
		NR_FDD_FR1_B						-115.5	-115.5
		NR_TDD_FR1_C						-115	-115
		NR_FDD_FR1_D NR_TDD_FR1_D						-114.5	-114.5
		NR_FDD_FR1_E NR_TDD_FR1_E						-114	-114
		NR_FDD_FR1_G						-113	-113
		NR_FDD_FR1_H						-112.5	-112.5
	Config 3,6	NR_FDD_FR1_A NR_TDD_FR1_A NR_SDL_FR1_A		-83.27	-83.27	-110	-110	-113	-113
		NR_FDD_FR1_B						-112.5	-112.5
		NR_TDD_FR1_C						-112	-112
		NR_FDD_FR1_D NR_TDD_FR1_D						-111.5	-111.5
		NR_FDD_FR1_E NR_TDD_FR1_E						-111	-111
		NR_FDD_FR1_G						-110	-110
		NR_FDD_FR1_H						-109.5	-109.5
$\hat{E}_s / I_{ot}$			dB	-1.75	-1.75	-1.75	-1.75	3	-1.75
$\hat{E}_s / N_{oc}$			dB	-1.75	-1.75	-1.75	-1.75	3	-1.75
CSI-RSRP^N ote3	Config 1,2,4,5	NR_FDD_FR1_A NR_TDD_FR1_A NR_SDL_FR1_A	dBm/SCS	-81.93	-81.93	-107.75	-107.75	-113	-117.75
		NR_FDD_FR1_B						-112.5	-117.25
		NR_TDD_FR1_C						-112	-116.75
		NR_FDD_FR1_D NR_TDD_FR1_D						-111.5	-116.25
		NR_FDD_FR1_E NR_TDD_FR1_E						-111	-115.75
		NR_FDD_FR1_G						-110	-114.75
		NR_FDD_FR1_H						-109.5	-114.25
	Config 3,6	NR_FDD_FR1_A NR_TDD_FR1_A NR_SDL_FR1_A		-85.02	-85.02	-111.75	-111.75	-110	-114.75
		NR_FDD_FR1_B						-109.5	-114.25
		NR_TDD_FR1_C						-109	-113.75
		NR_FDD_FR1_D NR_TDD_FR1_D						-108.5	-113.25
		NR_FDD_FR1_E NR_TDD_FR1_E						-108	-112.75
		NR_FDD_FR1_G						-107	-111.75
		NR_FDD_FR1_H						-106.5	-111.25
CSI-RSRQ Note3		NR_FDD_FR1_A NR_TDD_FR1_A	dB	-14.77	-14.77	-40.59	-40.59	-12.56	-14.76
		NR_FDD_FR1_B							

		NR_TDD_FR1_C							
		NR_FDD_FR1_D NR_TDD_FR1_D							
		NR_FDD_FR1_E NR_TDD_FR1_E							
		NR_FDD_FR1_G							
		NR_FDD_FR1_H							
Io[Note3]	Config 1,2,4,5	NR_FDD_FR1_A NR_TDD_FR1_A NR_SDL_FR1_A	dBm/ 9.36MHz	-50	-50	-75.83	-75.83	-83.28	-85.83
		NR_FDD_FR1_B						-82.78	-85.33
		NR_TDD_FR1_C						-82.28	-84.83
		NR_FDD_FR1_D NR_TDD_FR1_D						-81.78	-84.33
		NR_FDD_FR1_E NR_TDD_FR1_E						-81.28	-83.83
		NR_FDD_FR1_G						-80.28	-82.83
		NR_FDD_FR1_H						-79.78	-82.33
	Config 3,6	NR_FDD_FR1_A NR_TDD_FR1_A NR_SDL_FR1_A	dBm/ 38.16MHz	-50	-50	-76.73	-76.73	-77.19	-79.73
		NR_FDD_FR1_B						-76.69	-79.23
		NR_TDD_FR1_C						-76.19	-78.73
		NR_FDD_FR1_D NR_TDD_FR1_D						-75.69	-78.23
		NR_FDD_FR1_E NR_TDD_FR1_E						-75.19	-77.73
		NR_FDD_FR1_G						-74.19	-76.73
		NR_FDD_FR1_H						-73.69	-76.53
Propagation condition				AWGN	AWGN	AWGN	AWGN	AWGN	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: CSI-RSRQ, CSI-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: CSI-RSRQ, CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: NR operating band groups are as defined in Section 3.5.2.

A.4.7.9.2.3 Test Requirements

The CSI-RSRQ measurement accuracy shall fulfil the requirements in section 10.1.9.

A.4.7.10 CSI-SINR

A.4.7.10.1 EN-DC Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.4.7.10.1.1 Test Purpose and Environment

The purpose of this test is to verify that the CSI-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.12.

A.4.7.10.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table A.4.7.10.1.2-1. The absolute accuracy of CSI-SINR intra-frequency measurement is tested by using the parameters in Table A.4.7.10.1.2-2. The configuration of cell 1 (E-UTRA PCell) is specified in clause A.3.7.2.1. In all test cases, Cell 2 is the PSCell and Cell 3 is the target cell. CSI-RS for mobility configured for Cell 2 is associated to the SSB of Cell 2, and CSI-RS for mobility configured for Cell 3 is associated to the SSB of Cell 3.

Table A.4.7.10.1.2-1: CSI-SINR Intra frequency CSI-SINR supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.4.7.10.1.2-2: CSI-SINR Intra frequency test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN			freq1		freq1	
Duplex mode	Config 1,4		FDD			
	Config 2,3,5,6		TDD			
TDD configuration	Config 1,4		Not Applicable			
	Config 2,5		TDDConf.1.1			
	Config 3,6		TDDConf.2.1			
Downlink initial BWP configuration			DLBWP.0.1			
Downlink dedicated BWP configuration			DLBWP.1.1			
Uplink initial BWP configuration			ULBWP.0.1			
Uplink dedicated BWP configuration			ULBWP.1.1			
DRX Cycle configuration		ms	Not Applicable			
TRS configuration	Config 1, 4		TRS.1.1 FDD			
	Config 2, 5		TRS.1.1 TDD			
	Config 3, 6		TRS.1.2 TDD			
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2,5		SR.1.1 TDD		SR.1.1 TDD	
	Config 3,6		SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	-	CR.1.1 FDD	
	Config 2,5		CR.1.1 TDD		CR.1.1 TDD	

	Config 3,6		CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1,4		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2,5		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3,6		CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns			OP.1			
SS-RSSI-Measurement			Not Applicable			
Time offset with Cell 2	Config 1,2,4,5	µs	2.35	2.35	2.35	2.35
	Config 3.6	µs	1.17	1.17	1.17	1.17
SMTC configruation	Config 1,4		SMTC.2			
	Config 2,3,5,6		SMTC.1			
SSB configuration	Config 1,2,4,5		SSB.1 FR1			
	Config 3,6		SSB.2 FR1			
CSI-RS configuration for RRM	Config 1,4		CSI-RS.RRM.FR1.1 FDD			
	Config 2,5		CSI-RS.RRM.FR1.1 TDD			
	Config 3,6		CSI-RS.RRM.FR1.2 TDD			
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15			
	Config 3,6		30			
EPRE ratio of PSS to SSS		dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm /15kHz	-93		-116	
	NR_FDD_FR1_B				-115.5	
	NR_TDD_FR1_C				-115	
	NR_FDD_FR1_D, NR_TDD_FR1_D				-114.5	
	NR_FDD_FR1_E, NR_TDD_FR1_E				-114	
	NR_FDD_FR1_F				-113.5	
	NR_FDD_FR1_G				-113	
	NR_FDD_FR1_H				-112.5	
N_{oc} Note2 Config 1,2,4,5		dBm /SCS	-93		Same as Noc for 15kHz	
Config 3,6	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-90		-113	
	NR_FDD_FR1_B				-112.5	
	NR_TDD_FR1_C				-112	
	NR_FDD_FR1_D, NR_TDD_FR1_D				-111.5	
	NR_FDD_FR1_E, NR_TDD_FR1_E				-111	
	NR_FDD_FR1_F				-110.5	
	NR_FDD_FR1_G				-110	
	NR_FDD_FR1_H				-109.5	
$\hat{E}_s / I_{ot}$		dB	0	-3.19	-5.46	-5.46
$\hat{E}_s / N_{oc}$		dB	4.54	2.66	-4	-4

CSI-RSRP Note3	Config 1,2,4,5	NR_FDD_FR1_A, NR_TDD_FR1_A	dBm /SCS	-88.46	-90.34	-120	-120
		NR_FDD_FR1_B				-119.5	-119.5
		NR_TDD_FR1_C				-119	-119
		NR_FDD_FR1_D, NR_TDD_FR1_D				-118.5	-118.5
		NR_FDD_FR1_E, NR_TDD_FR1_E				-118	-118
		NR_FDD_FR1_F				-117.5	-117.5
		NR_FDD_FR1_G				-117	-117
		NR_FDD_FR1_H				-116.5	-116.5
	Config 3,6	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-85.46	-87.34	-117	-117
		NR_FDD_FR1_B				-116.5	-116.5
		NR_TDD_FR1_C				-116	-116
		NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5	-115.5
		NR_FDD_FR1_E, NR_TDD_FR1_E				-115	-115
		NR_FDD_FR1_F				-114.5	-114.5
		NR_FDD_FR1_G				-114	-114
		NR_FDD_FR1_H				-113.5	-113.5
CSI-SINR Note3		NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dB	0	-3.19	-5.46	-5.46
		NR_FDD_FR1_B					
		NR_TDD_FR1_C					
		NR_FDD_FR1_D, NR_TDD_FR1_D					
		NR_FDD_FR1_E, NR_TDD_FR1_E					
		NR_FDD_FR1_F					
		NR_FDD_FR1_G					
		NR_FDD_FR1_H					
Io Note3	Config 1,2,4,5	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm / 9.36 MHz	-57.5		-85.51	
		NR_FDD_FR1_B				-85.01	
		NR_TDD_FR1_C				-84.51	
		NR_FDD_FR1_D, NR_TDD_FR1_D				-84.01	
		NR_FDD_FR1_E, NR_TDD_FR1_E				-83.51	
		NR_FDD_FR1_F				-83.01	
		NR_FDD_FR1_G				-82.51	
		NR_FDD_FR1_H				-82.01	
	Config 3,6	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm / 38.16MHz	-51.41		-79.41	
		NR_FDD_FR1_B				-78.91	
		NR_TDD_FR1_C				-78.41	
		NR_FDD_FR1_D, NR_TDD_FR1_D				-77.91	
		NR_FDD_FR1_E, NR_TDD_FR1_E				-77.41	

		NR_FDD_FR1_F			-76.91
		NR_FDD_FR1_G			-76.41
		NR_FDD_FR1_H			-75.91
Propagation condition			-	AWGN	
Antenna configuration			-	1x2	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: CSI-SINR, CSI-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: CSI-SINR, CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: NR operating band groups are as defined in Clause 3.5.2.

Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification

A.4.7.10.1.3 Test Requirements

The CSI-SINR measurement accuracy shall fulfil the requirements in clause 10.1.12.

A.4.7.10.2 EN-DC Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.4.7.10.2.1 Test Purpose and Environment

The purpose of this test is to verify that the CSI-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.14.2.1 and 10.1.14.2.2 for inter-frequency measurement.

A.4.7.10.2.2 Test Parameters

In this test case the two NR cells (i.e., Cell 2 and Cell 3) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.4.7.10.2.2-1. Both absolute accuracy and relative accuracy requirements of CSI-SINR inter-frequency measurement are tested by using test parameters in Table A.4.7.10.2.2-2. In all test cases, Cell 2 is the PSCell and Cell 3 is target cell. Cell 1 is the E-UTRA cell of which specific test parameters for this test case are specified in Table A.3.7.2.1-1. CSI-RS for mobility configured for Cell 2 is associated to the SSB of Cell 2, and CSI-RS for mobility configured for Cell 3 is associated to the SSB of Cell 3.

Table A.4.7.10.2.2-1: CSI-SINR Inter frequency CSI-SINR supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.4.7.10.2.2-1: CSI-SINR Inter frequency test parameters

Parameter	Unit	Test 1		Test 2		Test 3	
		Cell 2	Cell 3	Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN		freq1	freq2	freq1	freq2	freq1	freq2

Duplex mode	Config 1,4		FDD						
	Config 2,3,5,6		TDD						
TDD configuration	Config 1,4		Not Applicable						
	Config 2,5		TDDConf.1.1						
	Config 3,6		TDDConf.2.1						
Downlink initial BWP configuration			DLBWP.0.1						
Downlink dedicated BWP configuration			DLBWP.1.1						
Uplink initial BWP configuration			ULBWP.0.1						
Uplink dedicated BWP configuration			ULBWP.1.1						
DRX Cycle configuration		ms	Not Applicable						
TRS configuration	Config 1, 4		TRS.1.1 FDD						
	Config 2, 5		TRS.1.1 TDD						
	Config 3, 6		TRS.1.2 TDD						
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-	
	Config 2,5		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD		
	Config 3,6		SR.2.1 TDD		SR.2.1 TDD		SR.2.1 TDD		
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	-	
	Config 2,5		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD		
	Config 3,6		CR.2.1 TDD		CR.2.1 TDD		CR.2.1 TDD		
Dedicated CORESET Reference Channel	Config 1,4		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-	
	Config 2,5		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD		
	Config 3,6		CCR.2.1 TDD		CCR.2.1 TDD		CCR.2.1 TDD		
OCNG Patterns			OP.1						
SS-RSSI-Measurement			Not Applicable						
Time offset with Cell 2	Config 1,2,4,5	µs	-	2.35	-	2.35	-	2.35	
	Config 3,6	µs	-	1.17	-	1.17	-	1.17	
SMTC configuration	Config 1,4		SMTC.2						
	Config 2,3,5,6		SMTC.1						
SSB configuration	Config 1,2,4,5		SSB.1 FR1						
	Config 3,6		SSB.2 FR1						
CSI-RS configuration for RRM	Config 1,4		CSI-RS.RRM.FR1.1 FDD						
	Config 2,5		CSI-RS.RRM.FR1.1 TDD						
	Config 3,6		CSI-RS.RRM.FR1.2 TDD						
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15						
	Config 3,6		30						
EPRE ratio of PSS to SSS		dB	0	0	0	0	0	0	
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									

EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	Config 1,2,4,5	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/15kHz	-88	-108.5	-119.5
		NR_FDD_FR1_B				-119
		NR_TDD_FR1_C				-118.5
		NR_FDD_FR1_D NR_TDD_FR1_D				-118
		NR_FDD_FR1_E NR_TDD_FR1_E				-117.5
		NR_FDD_FR1_F				-117
		NR_FDD_FR1_G				-116.5
		NR_FDD_FR1_H				-116
N_{oc} Note2	Config 1,2,4,5		dBm/SCS	-88	-108.5	Same as Noc for 15kHz
	Config 3,6	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6		-85	-105.5	-116.5
		NR_FDD_FR1_B				-116
		NR_TDD_FR1_C				-115.5
		NR_FDD_FR1_D NR_TDD_FR1_D				-115
		NR_FDD_FR1_E NR_TDD_FR1_E				-114.5
		NR_FDD_FR1_F				-114
		NR_FDD_FR1_G				-114.5
		NR_FDD_FR1_H				-113
$\hat{E}_s / I_{ot}$			dB	-1.75	20	-4.0
$\hat{E}_s / N_{oc}$			dB	-1.75	20	-4.0
CSI-RSRP Note3	Config 1,2,4,5	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/SCS	-89.75	-88.5	-123.5
		NR_FDD_FR1_B				-123
		NR_TDD_FR1_C				-122.5
		NR_FDD_FR1_D NR_TDD_FR1_D				-122
		NR_FDD_FR1_E NR_TDD_FR1_E				-121.5
		NR_FDD_FR1_F				-121
		NR_FDD_FR1_G				-120.5
		NR_FDD_FR1_H				-120
	Config 3,6	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6		-86.75	-85.5	-120.5
		NR_FDD_FR1_B				-120
		NR_TDD_FR1_C				-119.5
		NR_FDD_FR1_D NR_TDD_FR1_D				-119
		NR_FDD_FR1_E NR_TDD_FR1_E				-118.5
		NR_FDD_FR1_F				-118
		NR_FDD_FR1_G				-117.5
		NR_FDD_FR1_H				-117
CSI-SINR Note3		NR_FDD_FR1_A	dB	-1.75	20	-4.0

		NR_TDD_FR1_A NOTE 6				
		NR_FDD_FR1_B				
		NR_TDD_FR1_C				
		NR_FDD_FR1_D NR_TDD_FR1_D				
		NR_FDD_FR1_E NR_TDD_FR1_E				
		NR_FDD_FR1_F				
		NR_FDD_FR1_G				
		NR_FDD_FR1_H				
Io[Note3]	Config 1,2,4,5	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/ 9.36MHz	-57.83	-60.5	-90.09
		NR_FDD_FR1_B				-89.59
		NR_TDD_FR1_C				-89.09
		NR_FDD_FR1_D NR_TDD_FR1_D				-88.59
		NR_FDD_FR1_E NR_TDD_FR1_E				-88.09
		NR_FDD_FR1_F				-87.59
		NR_FDD_FR1_G				-87.09
		NR_FDD_FR1_H				-86.59
	Config 3,6	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/ 38.16MHz	-51.73	-54.41	-84
		NR_FDD_FR1_B				-83.5
		NR_TDD_FR1_C				-83
		NR_FDD_FR1_D NR_TDD_FR1_D				-82.5
		NR_FDD_FR1_E NR_TDD_FR1_E				-82
		NR_FDD_FR1_F				-81.5
		NR_FDD_FR1_G				-81
		NR_FDD_FR1_H				-80.5
Propagation condition			-	AWGN		
Antenna configuration			-	1x2		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: CSI-SINR, CSI-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: CSI-SINR, CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: NR operating band groups are as defined in Clause 3.5.2.

Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification

A.4.7.10.2.3 Test Requirements

The CSI-SINR measurement accuracy shall fulfil the requirements in clause 10.1.14.2.1 and 10.1.14.2.2.

A.4.8 Void

A.4A NE-DC test with all NR cells in FR1

A.4A.1 Signaling characteristics

A.4A.1.1 E-UTRAN PSCell addition

A.4A.1.1.1 Test purpose and environment

The purpose of this test is to verify that the LTE PSCell addition/release delay and interruption under NE-DC are within the requirements stated in clause 8.8 and clause 8.2.3.2.3 for the case when the PSCell is known by the UE at the time of addition.

Supported test configurations are shown in A.4A.1.1.1-1. The test parameters for the E-UTRA cell are given in Table A.3.7.2.1-1.

The test parameters for NR cell are given in Tables A.4A.1.1.1-2 and cell-specific parameters in A.4A.1.1.1-3 below. The test consists of six successive time periods with duration of T1, T2, T3, T4, T5 and T6 respectively. There are two carriers each with one cell. Before the test starts the UE is connected to Cell 1 (NR PCell) on radio channel 1 (PCC) but is not aware of Cell 2 (E-UTRAN PSCell) on radio channel 2. The UE is only monitoring the PCC. During T1 only Cell1 is known to the UE.

Before the start of T2, the UE in the measurement control information that event-triggered reporting with Event B1 is configured for neighbour cell (Cell2). Before the start of T2 the UE is configured with the measurement gaps (gap pattern Id # 0). The Cell2 becomes known to the UE during T2. Therefore, during T2 the UE shall report Event B1. The point in time at which the RRC message to release measurement gap is transmitted from the test system defines the start of period T3. During T3, after measurement gap is released, the test system transmits the RRC message to the UE to add PSCell on radio channel 2.

The RRC message (to add PSCell) also includes a request for the UE to start periodic CSI reporting for the PSCell after the PSCell has been successfully added. The point in time at which the RRC message to add PSCell (Cell2) is received at the UE antenna connector defines the start of period T4.

The test system shall observe the periodic reporting of CSI for PSCell during T5. The point in time at which the UE has sent PRACH to the PSCell (Cell 2) defines the start of period T5.

The test system shall send a RRC message to the UE to release PSCell (Cell 2) on radio channel 2. The RRC message to release PSCell (Cell2) shall be sent to the UE during period T5, after the UE has sent at least one CQI report with non-zero CQI index for PSCell (Cell 2). The point in time at which the RRC message to release PSCell (Cell2) is received at the UE antenna connector defines the start of period T6.

Table A.4A.1.1.1-1: Applicable E-UTRA and NR configurations for NE-DC PSCell addition and Release test

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.4A.1.1.1-2: General Test Parameters for PSCell Addition and Release

Parameter	Unit	Value	Comment

RF Channel Number			1, 2	Two radio channels are used for this test. One for NR cell and second for E-UTRAN Cell
Initial	Active PCell		Cell1	PCell on RF channel number 1.
	Neighbour cell		Cell2	Neighbour cell on RF channel number 2.
Final Condition	Active PCell		Cell1	PCell on RF channel number 1.
	Neighbour Cell		Cell2	PSCell released on RF channel number 2.
B1	Hysteresis	dB	0	Hysteresis for evaluation of event B1.
	Threshold RSRP (Config 1,2,4,5)	dBm	-96	Actual RSRP threshold for event B1.
	Threshold RSRP (Config 3,6)	dBm	-93	Actual RSRP threshold for event B1.
	Time to Trigger	S	0	
DRX			OFF	Continuous monitoring of primary cell
Measurement gap pattern Id			0	Gaps are configured before T2 and released before T3.
Cell-individual offset for cells on RF channel number 1		dB	0	Individual offset for cells on primary component carrier.
Cell-individual offset for cells on RF channel number 2		dB	0	Individual offset for cells on carrier frequency of cell2.
T1		s	1	During this time the PCell shall be known and cell2 shall be unknown.
T2		s	1	During this time the UE shall identify neighbour cell (cell2) and report event B1.
T3		s	3.5	During this time the test system transmits the RRC messages to release measurement gap and add PSCell.
T4		s	0.5	During this time the UE adds the PSCell.
T5		s	0.5	During this time the UE sends CSI reports for PSCell.
T6		s	0.5	During this time the UE releases the PSCell.

Table A.4A.1.1.1-3: NR Cell Specific Parameters for PSCell Addition and Release

Parameter	Unit	Config	Test
NR RF Channel Number		1,2,3,4,5,6	1
E-UTRA RF Channel Number		1,2,3,4,5,6	2
TDD configuration		1,4	Not Applicable
		2,5	TDDConf.1.1
		3,6	TDDConf.2.1
$BW_{channel}$	MHz	1,4	10: $N_{RB,c}$ = 52
		2,5	10: $N_{RB,c}$ = 52
		3,6	40: $N_{RB,c}$ = 106
Initial BWP Configuration		1,2,3	DLBWP.0.1 ULBWP.0.1
Dedicated BWP Configuration		1,2,3	DLBWP.1.1 ULBWP.1.1
PDSCH Reference measurement channel		1,4	SR.1.1 FDD
		2,5	SR.1.1 TDD
		3,6	SR.2.1 TDD
RMSI CORESET Reference Channel		1,4	CR.1.1 FDD
		2,5	CR.1.1 TDD
		3,6	CR.2.1 TDD
Dedicated CORESET Reference Channel		1,4	CCR.1.1 FDD
		2,5	CCR.1.1 TDD
		3,6	CCR.2.1 TDD

OCNG Patterns		1,2,3,4,5,6	OP.1
SSB configuration		1,2,4,5	SSB.1 FR1
		3,6	SSB.2 FR1
SMTC configuration		1,2,4,5	SMTC.1
		3,6	SMTC.1
TRS Configuration		1,4	TRS.1.1 FDD
		2,5	TRS.1.1 TDD
		3,6	TRS.1.2 TDD
CSI-RS configuration for CSI reporting		1,4	CSI-RS.1.1 FDD
		2,5	CSI-RS.1.1 TDD
		3,6	CSI-RS.2.1 TDD
reportConfigType		1,2,3,4,5,6	periodic
reportQuantity		1,2,3,4,5,6	cri-RI-PMI-CQI
CSI reporting periodicity	slot	1,2,4,5	5
		3,6	10
CSI reporting offset	slot	1,2,4,5	2
		3,6	4
EPRE ratio of PSS to SSS	dB	1,2,3,4,5,6	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note2	dBm/15 kHz	1,2,3,4,5,6	-88
N_{oc} Note2	dBm/SCS	1,2,4,5	-88
		3,6	-85
$\hat{E}_s / I_{ot}$		1,2,3,4,5,6	0
$\hat{E}_s / N_{oc}$		1,2,3,4,5,6	0
SS-RSRP Note3	dBm/SCS	1,2,4,5	-88
		3,6	-85
Io Note3	dBm/9.36MHz	1,2,4,5	-57
	dBm/38.1MHz	3,6	-51
Propagation condition		1,2,3,4,5,6	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Table A.4A.1.1.1-4: E-UTRAN cell specific test parameters for PSCell Addition and Release tests

Parameter	Unit	E-UTRAN Cell					
		T1	T2	T3	T4	T5	T6
Duplex mode		FDD or TDD					
TDD special subframe configuration[Note1]		6					
TDD uplink-downlink configuration[Note1]		1					
$BW_{channel}$		5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100					
PDSCH parameters: DL Reference Measurement Channel[Note2]		5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD 5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD					
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD 5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD					
OCNG Patterns[Note2]		5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD 5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD					
PBCH_RA	dB	0					
PBCH_RB	dB						
PSS_RA	dB						
SSS_RA	dB						
PCFICH_RB	dB						
PHICH_RA	dB						
PHICH_RB	dB						
PDCCH_RA	dB						
PDCCH_RB	dB						
PDSCH_RA	dB						
PDSCH_RB	dB						
OCNG_RA[Note3]	dB						
OCNG_RB[Note3]	dB						
N_{oc}[Note4]	dBm/15 kHz	N/A	-104				
$\hat{E}_s/N_{oc}$	dB	-infinite	17				
$\hat{E}_s/I_{ot}$	dB	-infinite	17				
RSRP [Note5]	dBm/15 kHz	-infinite	-87				
SCH_RP [Note5]	dBm/15 kHz	-infinite	-87				
Io [Note5]	dBm/Ch BW	N/A	-59.13+10log($N_{RB,c}$ /50)				
Propagation Condition		AWGN					
Antenna Configuration		1x2					

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211.
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: E_s/I_{ot}, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.4A.1.1.2 Test Requirements

The UE shall transmit the PRACH to PSCell at latest 120 ms[Note1] into T4.

The UE shall send at least one CSI report for PSCell with non-zero CQI index during T5.

The UE shall periodically send CSI reports for PSCell after the UE has sent first CQI report with non-zero CQI index during T5.

The UE shall stop sending CSI reports for PSCell in at latest 20ms into T6.

Interruption on PCell during PSCell addition and release shall not exceed the values specified for NE-DC in Clause 8.2.3.2.3.

All the above test requirements shall be fulfilled in order for the observed PSCell addition delay and PSCell release delay to be counted as correct. The rate of correct observed PSCell addition delay and PSCell release delay during repeated tests shall be at least 90%.

Note1: The PSCell addition delay can be expressed as follows as specified in clause 8.8 [15]:

$$T_{config_EUTRAN\text{-}PSCell} = 20ms + T_{activation_time} + 50ms + T_{PCell_DU} + T_{E\text{-}UTRAN\text{-}PSCell_DU}$$

Where:

$T_{activation_time}$ = 20ms

T_{PSCell_DU} = 0ms

$T_{E\text{-}UTRAN\text{-}PSCell_DU}$ = 30ms

A.4A.1.2 Active BWP switch

A.4A.1.2.1 E-UTRAN PSCell – NR PCell FR1 DCI-based and Timer-based DL active BWP switch in non-DRX in synchronous NE-DC

A.4A.1.2.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement defined in TS38.133 clause 8.6, and interruption requirement for E-UTRA victim cell defined in TS36.133 clause 7.36.2.6. Supported test configurations are shown in Table A.4A.1.2.1.1-1.

The test scenario comprises of one NR PCell (Cell 1), and one E-UTRA PSCell (Cell 2) as given in Table A.4A.1.2.1.1-2. Cell-specific parameters of NR PCell is specified in Table A.4A.1.2.1.1-3. below, and cell-specific parameters of E-UTRA PSCell are specified in Table A.3.7.2.1-1.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on Cell 1 and the time duration of T2.

PDCCHs indicating new transmissions shall be sent continuously on PSCell (Cell 2) to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), and Cell 2 (PSCell) on radio channel 2 (PSCC).
- UE is configured with 2 different UE-specific downlink bandwidth parts for PCell, BWP-1 and BWP-2, in Cell 1 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.

- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in PCell.
- UE is configured with a *bwp-InactivityTimer* timer value for PCell.

All cells have constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

> Time period T1 starts when a DCI format 1_1 command for PCell DL BWP switch, sent from the test equipment to the UE, is received at the UE side in PCell's slot # denoted *i*. The UE shall switch its bandwidth part from BWP-1 to BWP-2.
>
> The UE shall be able to receive PDSCH at the beginning of the DL slot right after PCell's DL slot ($i+T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the PCell no later than at the beginning of the DL slot right after DL slot ($i+T_{BWPswitchDelay}+k1$). The UE shall be continuously scheduled on PCell's BWP-2 starting from the beginning of the DL slot right after DL slot ($i+T_{BWPswitchDelay}$).
>
> The starting time of PSCell(Cell 2) interruption due to BWP switch on PCell shall occur within the BWP switch delay.

During T2, the test equipment won't transmit DCI format for PDSCH reception on PCell(Cell 1).

During T3,

> The time period T3 starts from the slot #*j*, where j is the beginning slot of the DL subframe immediately after the *bwp-InactivityTimer* timer expires. The UE shall switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1.
>
> The UE shall be able to receive PDSCH at the beginning of the DL slot right after PCell's DL slot ($j+T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the PCell at latest at the beginning of the DL slot right after DL slot ($j+T_{BWPswitchDelay}+k1$). The UE shall be continuously scheduled on PCell's BWP-1 starting from the beginning of the DL slot right after DL slot ($j+T_{BWPswitchDelay}$).
>
> The starting time of PSCell(Cell 2) interruption due to BWP switch of PCell shall occur within the BWP switch delay.

The test equipment verifies the DL BWP switch time in PCell by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK is received.

The test equipment verifies that potential interruption to E-UTRA PSCell is carried out in the correct time span by monitoring ACK/NACK sent in PSCell during BWP switch of PCell, respectively.

Table A.4A.1.2.1.1-1: DL BWP switch supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.	

Table A.4A.1.2.1.1-2: General test parameters for DL BWP switch in synchronous NE-DC

Parameter	Unit	Value	Comment

NR RF Channel Number		1	One NR radio channel is used for this test
E-UTRA RF Channel Number		2	One E-UTRA radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
CP length		Normal	
DRX		OFF	For both PCell and PSCell
bwp-InactivityTimer	ms	[200]	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell2 timing offset to cell1	µs	3	Synchronous NE-DC
T1	s	[0.2]	
T2	s	[0.2]	
T3	s	[0.2]	

Table A.4A.1.2.1.1-3: NR Cell specific test parameters for DL BWP switch in synchronous NE-DC

Parameter		Unit	Cell 1
Frequency Range			FR1
Duplex mode	Config 1,4		FDD
	Config 2,3,5,6		TDD
TDD configuration	Config 1,4		Not Applicable
	Config 2,5		TDDConf.1.1
	Config 3,6		TDDConf.2.1
$BW_{channel}$	Config 1,4		10 MHz: $N_{RB,c}$ = 52
	Config 2,5		10 MHz: $N_{RB,c}$ = 52
	Config 3,6		40 MHz: $N_{RB,c}$ = 106
Active BWP ID			1, 2
Initial DL BWP Configuration	Config 1,4		DLBWP.0.2 Note 4
	Config 2,5		
	Config 3,6		
Active DL BWP-1 Configuration	Config 1,4		DLBWP.1.1 Note 4
	Config 2,5		
	Config 3,6		
Active DL BWP-2 Configuration	Config 1,4		DLBWP.1.3 Note 4
	Config 2,5		
	Config 3,6		
Initial UL BWP Configuration	Config 1,4		ULBWP.0.2 Note 4
	Config 2,5		
	Config 3,6		
Active UL BWP-1 Configuration	Config 1,4		ULBWP.1.1 Note 4
	Config 2,5		
	Config 3,6		
Active UL BWP-2 Configuration	Config 1,4		ULBWP.1.3 Note 4
	Config 2,5		
	Config 3,6		
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2,5		SR.1.1 TDD
	Config 3,6		SR.2.1 TDD
RMSI CORESET parameters	Config 1,4		CR.1.1 FDD
	Config 2,5		CR.1.1 TDD
	Config 3,6		CR.2.1 TDD
Dedicated CORESET parameters	Config 1,4		CCR.1.1 FDD
	Config 2,5		CCR.1.1 TDD
	Config 3,6		CCR.2.3 TDD
OCNG Patterns			OP.1

SSB Configuration	Config 1,2,4,5		SSB.1 FR1
	Config 3,6		SSB.2 FR1
SMTC Configuration			SMTC.1
Correlation Matrix and Antenna Configuration			1x2 Low
TRS Configuration	Config 1,4		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note 2	Config 1,2,4,5	dBm/SCS	[-104]
	Config 3,6		[-101]
N_{oc} Note 2		dBm/15kHz	-104
SS-RSRP Note 3	Config 1,2,4,5	dBm/SCS	[-87]
	Config 3,6		[-90]
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	Config 1,2,4,5	dBm/9.36MHz	[-59]
	Config 3,6	dBm/38.16MHz	[-61.9]
Propagation Condition			AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for Noc to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].

A.4A.1.2.1.2 Test Requirements

During T1, the UE shall start to send the ACK for PCell in the DL slot right after DL slot ($i+T_{BWPswitchDelay}+k1$).

During T3, the UE shall start to send the ACK for PCell in the DL slot right after DL slot ($j+T_{BWPswitchDelay}+k1$).

Where, *k1* is the timing between DL data receiving and acknowledgement as specified in [7].

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 8.6.2-1.

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

During T1, the start time of PSCell interruption during PCell active BWP switch shall not happen outside the BWP switch delay.

During T3, the start time of PSCell interruption of during PCell active BWP switch shall not happen outside the BWP switch delay.

The interruption of PSCell shall not be longer than the interruption duration specified for active BWP switch in TS36.133 Clause 7.36.2.6.

All of the above test requirements shall be fulfilled in order for the observed PSCell active BWP switch interruption to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK in the DL slot right after DL slot ($i+T_{BWPswitchDelay}+k1$), ($j+T_{BWPswitchDelay}+k1$), then the UE shall use the next available uplink resource for reporting the corresponding ACK.

A.4A.1.3 Intra-frequency handover with E-UTRAN PSCell

A.4A.1.3.1 Test purpose and environment

The purpose of this test is to verify that the intra-frequency handover with PSCell addition/change delay and interruption under NE-DC are within the requirements stated in clause 6.1.5.3 for the case when the PCell and PSCell are known by the UE.

Supported test configurations are shown in A.4A.1.3.1-1. The test parameters for the E-UTRA cell are given in Table A.3.7.2.1-1.

The test parameters for NR cells are given in Tables A.4A.1.3.1-2 and cell-specific parameters in A.4A.1.3.1-3 below. The test consists of three time periods with duration of T1, T2 and T3 respectively. There are two carriers and two cells on each carrier. Before the test starts the UE is connected to Cell 1 (NR PCell) on radio channel 1 (PCC) and Cell 2 (E-UTRAN PSCell) on radio channel 2. During T1 only Cell1 and Cell 2 are known to the UE.

Before the start of T2, the UE in the measurement control information that event-triggered reporting with Event A3 is configured for NR neighbour cell (Cell 3), and event-triggered reporting with Event A3 is configured for neighbour cell (Cell4). The Cell3 and Cell4 become known to the UE during T2. Therefore, during T2 the UE shall report Event A3 for the PCC frequency layer and Event A3 for the PSCC frequency layer.

The test system shall send a RRC message to the UE implying handover with PSCell, with targe PCell as Cell 3 and target PSCell as Cell 4 at the end of T2 duration. The point in time at which the RRC message implying handover with PSCell is received at the UE antenna connector defines the start of period T3. UE shall complete PRACH transmission to PCell and PSCell by end of T3.

Table A.4A.1.3.1-1: Applicable E-UTRA and NR configurations for NE-DC Handover with PSCell test

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.4A.1.3.1-2: General Test Parameters for Intra-frequency handover with PSCell

Parameter	Unit	Value	Comment

RF Channel Number			1, 2	Two radio channels are used for this test. One for NR cell and second for E-UTRAN Cell
Initial	Active PCell		Cell1	PCell on RF channel number 1.
	Active PSCell		Cell2	PSCell cell on RF channel number 2.
	Neighbour PCell		Cell3	Neighbor PCell on RF channel number 1.
	Neighbour PSCell		Cell4	Neighbor PSCell on RF channel number 2.
Final Condition	Active PCell		Cell3	PCell on RF channel number 1.
	Active PSCell		Cell4	PSCell on RF channel number 2.
A3 for PCC frequency layer	A3-Offset	dB	0	
	Hysteresis	dB	0	Hysteresis for evaluation of event A3.
	Time To Trigger	s	0	Time to Trigger of event A3
A3 for PSCC frequency layer	A3-Offset	dB	0	Hysteresis for evaluation of event A3.
	Hysteresis	dB	0	Actual RSRP threshold for event A3.
	Time to Trigger	S	0	Time to Trigger of event A3
DRX			OFF	Continuous monitoring of primary cell
Measurement gap pattern Id			0	Gaps are configured before T2 and released before T3.
Cell-individual offset for cells on RF channel number 1		dB	0	Individual offset for cells on primary component carrier.
Cell-individual offset for cells on RF channel number 2		dB	0	Individual offset for cells on carrier frequency of cell2.
T1		s	1	During this time the PCell shall be known and cell2 shall be unknown.
T2		s	≤5	During this time the UE shall identify neighbour cell (cell3 and cell 4) and report event A3 and B1, and RRC message implying handover with PSCell at the end of this duration
T3		s	1	During this time the UE finishes PCell handover and PSCell change.

Table A.4A.1.3.1-3: NR Cell Specific Parameters for Intra-frequency handover with PSCell

Parameter	Unit	Config	Cell 1			Cell 3		
			T1	T2	T3	T1	T2	T3
NR RF Channel Number		1,2,3,4,5,6	1					
E-UTRA RF Channel Number		1,2,3,4,5,6	2					
TDD configuration		1,4	Not Applicable					
		2,5	TDDConf.1.1					
		3,6	TDDConf.2.1					
$BW_{channel}$	MHz	1,4	10: $N_{RB,c}$ = 52					
		2,5	10: $N_{RB,c}$ = 52					
		3,6	40: $N_{RB,c}$ = 106					
Initial BWP Configuration		1,2,3	DLBWP.0.1 ULBWP.0.1					
Dedicated BWP Configuration		1,2,3	DLBWP.1.1 ULBWP.1.1					
PDSCH Reference measurement channel		1,4	SR.1.1 FDD					
		2,5	SR.1.1 TDD					
		3,6	SR.2.1 TDD					
CORESET Reference Channel		1,4	CR.1.1 FDD					
		2,5	CR.1.1 TDD					

		3,6	CR.2.1 TDD					
OCNG Patterns		1,2,3,4,5,6	OP.1					
SSB configuration		1,2,4,5	SSB.1 FR1					
		3,6	SSB.2 FR1					
SMTC configuration		1,2,4,5	SMTC.1					
		3,6	SMTC.1					
TRS Configuration		1,4	TRS.1.1 FDD					
		2,5	TRS.1.1 TDD					
		3,6	TRS.1.2 TDD					
PRACH configuration			FR1 PRACH configuration 1					
PDSCH/PDCCH subcarrier spacing	kHz	1,2,4,5	15 kHz					
		3,6	30 kHz					
PUCCH/PUSCH subcarrier spacing	kHz	1,2,4,5	15 kHz					
		3,6	30 kHz					
EPRE ratio of PSS to SSS EPRE ratio of PBCH DMRS to SSS EPRE ratio of PBCH to PBCH DMRS EPRE ratio of PDCCH DMRS to SSS EPRE ratio of PDCCH to PDCCH DMRS EPRE ratio of PDSCH DMRS to SSS EPRE ratio of PDSCH to PDSCH EPRE ratio of OCNG DMRS to SSS(Note 1) EPRE ratio of OCNG to OCNG DMRS (Note 1)	dB	1,2,3,4,5,6	0					
N_{oc} Note2	dBm/15 kHz	1,2,3,4,5,6	-98					
N_{oc} Note2	dBm/SCS	1,2,4,5	-98					
		3,6	-95					
$\hat{E}_s/I_{ot}$		1,2,3,4,5,6	8	-3.3	-3.3	-Infinity	2.36	2.36
$\hat{E}_s/N_{oc}$		1,2,3,4,5,6	8	8	8	-Infinity	11	11
SS-RSRP Note3	dBm/SCS	1,2,4,5	-90	-90	-90	-Infinity	-87	-87
		3,6	-87	-87	-87	-Infinity	-84	-84
Io Note3	dBm/9.36MHz	1,2,4,5	-61.41	-57.06	-57.06	-61.41	-57.06	-57.06
	dBm/38.1MHz	3,6	-55.31	-50.96	-50.96	-55.31	-50.96	-50.96
Propagation condition		1,2,3,4,5,6	AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Table A.4A.1.3.1-4: E-UTRAN cell specific test parameters for Intra-frequency handover with PSCell

Parameter	Unit	Cell 2			Cell 4		
		T1	T2	T3	T1	T2	T3
Duplex mode		FDD or TDD					
TDD special subframe configuration[Note1]		6					
TDD uplink-downlink configuration[Note1]		1					
$BW_{channel}$		5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100					
PDSCH parameters: DL Reference Measurement Channel[Note2]		5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD 5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD					
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD 5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD					
OCNG Patterns[Note2]		5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD 5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD					
PBCH_RA	dB	0					
PBCH_RB	dB						
PSS_RA	dB						
SSS_RA	dB						
PCFICH_RB	dB						
PHICH_RA	dB						
PHICH_RB	dB						
PDCCH_RA	dB						
PDCCH_RB	dB						
PDSCH_RA	dB						
PDSCH_RB	dB						
OCNG_RA[Note3]	dB						
OCNG_RB[Note3]	dB						
N_{oc}[Note4]	dBm/15 kHz	-104					
$\hat{E}_s/N_{oc}$	dB	14	14	14	-Infinity	17	17
$\hat{E}_s/I_{ot}$	dB	14	14	14	-Infinity	17	17
RSRP [Note5]	dBm/15 kHz	-90	-90	-90	-Infinity	-87	-87
SCH_RP [Note5]	dBm/15 kHz	-90	-90	-90	-Infinity	-87	-87
Io [Note5]	dBm/Ch BW	-56.13+10log($N_{RB,c}$/50)	-56.13+10log($N_{RB,c}$/50)	-56.13+10log($N_{RB,c}$/50)	N/A	-59.13+10log($N_{RB,c}$/50)	-59.13+10log($N_{RB,c}$/50)
Propagation Condition		AWGN					

Antenna Configuration		1x2
Note 1:	Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211.	
Note 2:	DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 respectively.	
Note 3:	OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.	
Note 4:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.	
Note 5:	E_s/I_{ot}, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.	

A.4A.1.3.2 Test Requirements

The UE shall transmit the PRACH to PCell at latest $D_{HOwithPSCell_PCell}$ = 83ms into T3.

The UE shall transmit the PRACH to PSCell at latest $D_{HOwithPSCell_PSCell}$ = 121ms into T3.

The PCell handover delay, $D_{HOwithPSCell_PCell}$, is equals the applicable RRC procedure delay (16ms) defined in clause 12 in TS 38.331 [2] plus the PCell interruption time ($T_{interrupt}$ = 67 ms) define in clause 6.1.5.3.2.

PSCell addition/change delay, $D_{HOwithPSCell_PSCell}$ is defined in clause 6.1.5.3.3 as below.

$D_{HOwithPSCel_PSCell} = T_{config_EUTRAN-PSCell} + T_{processing_margin}$

$T_{config_EUTRAN-PSCell} = T_{RRC_delay} + T_{activation_time} + 50ms + T_{E-UTRAN-PSCell_DU}$

Where:

$T_{processing_margin}$ = 5ms

T_{RRC_delay} = 16ms

$T_{activation_time}$ = 20ms

$T_{E-UTRAN-PSCell_DU}$ = 30ms

All the above test requirements shall be fulfilled in order for the observed handover with PSCell delay to be counted as correct. The rate of correct observed handover with PSCell delay during repeated tests shall be at least 90%.

A.4A.1.4 Handover with PSCell from NE-DC to NE-DC with unknown target PSCell

A.4A.1.4.1 Test Purpose and Environment

This test is to verify the requirement for the requirements of HO with PSCell requirements specified in clause 6.1.5.3. HO from NR FR1 to NR FR1 and E-UTRAN PSCell change are tested independently in the same test, with different end points.

A.4A.1.4.2 Test Parameters

Supported test configurations are shown in table A.4A.1.4.2-1. Both handover delay and interruption length are tested by using the parameters in table A.4A.1.4.2-2, and A.4A.1.4.2-3.

The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, UE is connected to Cell 1 (NR PCell) and Cell 3 (LTE PSCell 1). The UE may not have any timing information of Cell 2 at the start of T1. Starting of T1, Cell 2 becomes detectable and known to UE for entire T1 duration.

Cell 4 is turned on at the end of T1. At the start of T2, UE do not have timing information of Cell 4 (LTE PSCell 2).

During T2, UE reports Event A3 to TE and TE shall send a RRC message implying handover from Cell 1 to Cell 2 and PSCell change from Cell 3 to Cell 4 in the same RRC message implying handover with PSCell change during T2.

Start of T3 is defined as the end of the last TTI containing the RRC message implying handover with PSCell change. UE shall complete PRACH transmission to PCell and PSCell by end of T3.

Table A.4A.1.4.2-1: NE-DC test configurations for NE-DC to NE-DC HO with PSCell

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.4A.1.4.2-2: General test parameters NE-DC to NE-DC HO with PSCell

Parameter		Unit	Value	Comment
RF Channel Number			1, 2, 3	Three radio channels are used for this test. One for NR cell and second for E-UTRAN Cell
Initial conditions	Active cell		Cell 1	PCell on RF channel number 1.
	Active PSCell		Cell 3	PSCell released on RF channel number 3.
Final Condition	Active PCell		Cell2	PCell on RF channel number 2.
	Active PSCell		Cell4	PSCell released on RF channel number 3.
A3-Offset		dB	0	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
T1		s	5	
T2		s	≤5	
T3		S	1	

Table A.4A.1.4.2-3: Cell specific test parameters for NR for NE-DC to NE-DC HO with PSCell test

Parameter		Unit	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
NR RF Channel Number			1			1		
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
TDD configuration	Config 1		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52					
	Config 2		10: $N_{RB,c}$ = 52					
	Config 3		40: $N_{RB,c}$ = 106					
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52					

	Config 2		10: $N_{RB,c}$ = 52					
	Config 3		40: $N_{RB,c}$ = 106					
DRx Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD					
	Config 2		SR.1.1 TDD					
	Config 3		SR2.1 TDD					
CORESET Reference Channel	Config 1		CR.1.1 FDD					
	Config 2		CR.1.1 TDD					
	Config 3		CR2.1 TDD					
TRS configuration	Config 1		TRS.1.1 FDD					
	Config 2		TRS.1.1 TDD					
	Config 3		TRS.1.2 TDD					
OCNG Patterns			OP.1					
SMTC Configuration			SMTC.1					
SSB Configuration	Config 1,2		SSB.1 FR1					
	Config 3		SSB.2 FR1					
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz					
	Config 3		30 kHz					
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15 kHz					
	Config 3		30 kHz					
PRACH configuration			FR1 PRACH configuration 1					
BWP configuration	Initial DL BWP		DLBWP.0.1					
	Dedicated DL BWP		DLBWP.1.1					
	Initial UL BWP		ULBWP.0.1					
	Dedicated UL BWP		ULBWP.1.1					
EPRE ratio of PSS to SSS		dB	0					
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} Note2		dBm/15kHz	-98					
N_{oc} Note2	Config 1,2	dBm/SCS	-98					
	Config 3		-95					
$\hat{E}_s / I_{ot}$		dB	8	-3.3	-3.3	-Infinity	2.36	2.36
$\hat{E}_s / N_{oc}$		dB	8	8	8	-Infinity	11	11
SSB_RP	Config 1,2	dBm/SCS	-90	-90	-90	-Infinity	-87	-87
	Config 3	dBm/SCS	-87	-87	-87	-Infinity	-84	-84
Io Note3	Config 1,2	dBm/9.36MHz	-61.41	-57.06	-57.06	-61.41	-57.06	-57.06
	Config 3	dBm/38.16MHz	-55.31	-50.96	-50.96	-55.31	-50.96	-50.96
Propagation condition		-	AWGN			AWGN		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.								

Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.4A.1.4.2-4: E-UTRAN cell specific test parameters for EUTRA PSCell addition/change

Parameter	Unit	E-UTRAN Cell 3		E-UTRAN Cell 4
		T1	T2	T3
Duplex mode		FDD or TDD		
TDD special subframe configuration[Note1]		6		
TDD uplink-downlink configuration[Note1]		1		
$BW_{channel}$		5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100		
PDSCH parameters: DL Reference Measurement Channel[Note2]		5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD 5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD		
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD 5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD		
OCNG Patterns[Note2]		5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD 5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD		
PBCH_RA	dB	0		
PBCH_RB	dB			
PSS_RA	dB			
SSS_RA	dB			
PCFICH_RB	dB			
PHICH_RA	dB			
PHICH_RB	dB			
PDCCH_RA	dB			
PDCCH_RB	dB			
PDSCH_RA	dB			
PDSCH_RB	dB			
OCNG_RA[Note3]	dB			
OCNG_RB[Note3]	dB			
N_{oc}[Note4]	dBm/15 kHz	N/A	-104	
$\hat{E}_s/N_{oc}$	dB	-infinite	17	
$\hat{E}_s/I_{ot}$	dB	-infinite	17	
RSRP [Note5]	dBm/15 kHz	-infinite	-87	
SCH_RP [Note5]	dBm/15 kHz	-infinite	-87	
Io [Note5]	dBm/Ch BW	N/A	-59.13+10log($N_{RB,c}$ /50)	
Propagation Condition		AWGN		
Antenna Configuration		1x2		

Note 1:	Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211.
Note 2:	DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 respectively.
Note 3:	OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5:	E_s/I_{ot}, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.4A.1.4.3 Test Requirements

A.4A.1.4.3.1 Test Requirements for NR HO

The UE shall start to transmit the PRACH to Cell 2 less than 83 ms from the beginning of time period T3.
The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 16 ms and is specified in clause 12 in TS 38.331 [2], RRC reconfiguration (LTE/NR SCG

establishment/ modification/ release).

$T_{interrupt}$ = 67 ms in the test. $T_{interrupt}$ is defined in clause 6.1.5.3.2.

This gives a total of 83 ms.

A.4A.1.4.3.2 Test Requirements for LTE PSCell Change

The UE shall transmit the PRACH to PSCell at latest 131 ms[Note1] into T3.

There cannot be any interruptions on PCell during PSCell change.

All the above test requirements shall be fulfilled in order for the observed PSCell change delay to be counted as correct. The rate of correct observed PSCell change delay during repeated tests shall be at least 90%.

Note1: The PSCell change delay can be expressed as follows as specified in clause 6.1.5.3.3 of TS 38.133 is

$D_{HOwithPSCel_PSCell} = T_{config_EUTRAN\text{-}PSCell} + 5ms$,

$T_{config_EUTRAN\text{-}PSCell} = T_{RRC_delay} + T_{activation_time} + 50ms + T_{E\text{-}UTRAN\text{-}PSCell_DU}$,

$T_{activation_time}$ is the PSCell activation delay. If the PSCell is known, then $T_{activation_time}$ is 20ms. If the PSCell is unknown, then $T_{activation_time}$ is 30ms provided the PSCell can be successfully detected on the first attempt.

$T_{E\text{-}UTRAN\text{-}PSCell_DU}$ is the delay uncertainty in acquiring the first available PRACH occasion in the E-UTRAN PSCell. $T_{E\text{-}UTRAN\text{-}PSCell_DU}$ is up to 30ms.

Where:

T_{RRC_delay} = 16ms

$T_{activation_time}$ = 30ms

$T_{E\text{-}UTRAN\text{-}PSCell_DU}$ = 30ms

A.4A.2 Measurement performance

A.4A.2.1 SFTD accuracy

A.4A.2.1.1 SFTD accuracy

A.4A.2.1.1.1 Test Purpose

The purpose of this set of tests is to verify that the SFTD measurement accuracy is within the specified limits. This test will verify the requirements as specified in clause 10.21.1.1 for NE-DC SFTD measurements.

A.4A.2.1.1.2 Test Environment

Supported test configurations are shown in Table A.4A.2.1.1.2-1. In this set of test cases there are two cells on different carriers. Cell 1 is NR FR1 PCell and Cell 2 is E-UTRAN target cell. The test parameters of cell 1 are given in clause A.4A.2.1.1.2-2. The test parameters of cell 2 are given in Table A.3.7.2.1. The SFTD between PCell and target cell shall be set by the test equipment to one of the time differences in Table A.4A.2.1.1.2-3.

Table A.4A.2.1.1.2-1: Supported test configurations for SFTD accuracy

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE TDD
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.4A.2.1.1.2-2: Test parameters for SFTD accuracy (Cell 1)

Parameter	Config	Unit	Test 1
SSB GSCN	1~6		freq1
Duplex mode	1,4		FDD
	2,5		TDD
	3,6		TDD
TDD Configuration	1,4		N/A
	2,5		TDDConf.1.1
	3,6		TDDConf.2.1
$BW_{channel}$	1,4	MHz	10: $N_{RB,c}$ = 52
	2,5		10: $N_{RB,c}$ = 52
	3,6		40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2,5		SR.1.1 TDD
	3,6		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2,5		CR.1.1 TDD
	3,6		CR.2.1 TDD
RMC CORESET Reference Channel	1,4		CCR.1.1 FDD
	2,5		CCR.1.1 TDD
	3,6		CCR.2.1 TDD
SSB configuration	1,4		SSB.1 FR1
	2,5		SSB.1 FR1
	3,6		SSB.2 FR1

SMTC configuration		1~6		SMTC.1
DL BWP configuration		1~6		DLBWP.1.1
UL BWP configuration		1~6		ULBWP.1.1
OCNG Patterns		1~6		OP.1
EPRE ratio of PSS to SSS		1~6	dB	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1~6	dBm/15kHz	-104
	NR_FDD_FR1_B			
	NR_TDD_FR1_C			
	NR_FDD_FR1_D, NR_TDD_FR1_D			
	NR_FDD_FR1_E, NR_TDD_FR1_E			
	NR_FDD_FR1_F			
	NR_FDD_FR1_G			
	NR_FDD_FR1_H			
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2,4,5	dBm/SSB SCS	-104
	NR_FDD_FR1_B			
	NR_TDD_FR1_C			
	NR_FDD_FR1_D, NR_TDD_FR1_D			
	NR_FDD_FR1_E, NR_TDD_FR1_E			
	NR_FDD_FR1_F			
	NR_FDD_FR1_G			
	NR_FDD_FR1_H			
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3,6		-101
	NR_FDD_FR1_B			
	NR_TDD_FR1_C			
	NR_FDD_FR1_D, NR_TDD_FR1_D			
	NR_FDD_FR1_E, NR_TDD_FR1_E			
	NR_FDD_FR1_F			
	NR_FDD_FR1_G			
	NR_FDD_FR1_H			
$\hat{E}_s / I_{ot}$		1~6	dB	-3
$\hat{E}_s / N_{oc}$		1~6	dB	-3

SS-RSRP Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2,4,5	dBm/SCS	-107
	NR_FDD_FR1_B			
	NR_TDD_FR1_C			
	NR_FDD_FR1_D, NR_TDD_FR1_D			
	NR_FDD_FR1_E, NR_TDD_FR1_E			
	NR_FDD_FR1_F			
	NR_FDD_FR1_G			
	NR_FDD_FR1_H			
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3,6		-104
	NR_FDD_FR1_B			
	NR_TDD_FR1_C			
	NR_FDD_FR1_D, NR_TDD_FR1_D			
	NR_FDD_FR1_E, NR_TDD_FR1_E			
	NR_FDD_FR1_F			
	NR_FDD_FR1_G			
	NR_FDD_FR1_H			
Io Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2,4,5	dBm/9.36 MHz	-74.28
	NR_FDD_FR1_B			
	NR_TDD_FR1_C			
	NR_FDD_FR1_D, NR_TDD_FR1_D			
	NR_FDD_FR1_E, NR_TDD_FR1_E			
	NR_FDD_FR1_F			
	NR_FDD_FR1_G			
	NR_FDD_FR1_H			
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3,6	dBm/38.16 MHz	-68.18
	NR_FDD_FR1_B			
	NR_TDD_FR1_C			
	NR_FDD_FR1_D, NR_TDD_FR1_D			
	NR_FDD_FR1_E, NR_TDD_FR1_E			
	NR_FDD_FR1_F			
	NR_FDD_FR1_G			
	NR_FDD_FR1_H			
Propagation condition		1~6		AWGN
Antenna configuration		1~6		1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				

Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification

Table A.4A.2.1.1.2-3: Timing offsets for SFTD accuracy test

Configuration	SFN offset between PCell and PSCell	Frame boundary offset between PCell and PSCell (Ts)
1	100	-122000
2	300	-60540
3	500	1000
4	700	62540
5	900	124000

A.4A.2.1.1.3 Test Requirements

The SFTD reported by the UE consists of 2 elements, SFN offset and frame boundary offset between PCell and E-UTRAN target cell. The reported SFTD accuracy shall fulfil the requirement in clause 10.1.21.1.

A.5 EN-DC tests with one or more NR cells in FR2

A.5.1 Void

A.5.2 Void

A.5.3 RRC_CONNECTED state mobility

A.5.3.1 Void

A.5.3.2 RRC Connection Mobility Control

A.5.3.2.1 Void

A.5.3.2.2 Random Access

A.5.3.2.2.1 4-step RA type c ontention based random access test in FR2 for PSCell/SCell in EN-DC

A.5.3.2.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in clause 6.2.2.2 and clause 7.1.2 in an AWGN model.

For this test two cells are used, with the configuration of Cell 1 (E-UTRA PCell) specified in clause A.3.7.2.1 and Cell 2 configured as PSCell or SCell in FR2. Supported test parameters are shown in Table A.5.3.2.2.1.1-1. UE capable of EN-DC with PSCell or SCell in FR2 needs to be tested by using the parameters in Table A.5.3.2.2.1.1-2 and Table A.5.3.2.2.1.1-3.

Table A.5.3.2.2.1.1-1: Supported test configurations for non-contention based random access test in FR2 for PSCell/SCell in EN-DC

Config	Description
1	LTE FDD, NR PSCell/SCell 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR PSCell/SCell 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations depending on UE capability	

Table A.5.3.2.2.1.1-2: General test parameters for contention based random access test in FR2 for PSCell/SCell in EN-DC

Parameter		Unit	Test-1	Comments
SSB Configuration	Config 1,2		SSB.1 FR2	As defined in A.3.10
CSI-RS for tracking	Config 1,2		TRS.2.1 TDD	
Duplex Mode for Cell 2	Config 1,2		TDD	
TDD Configuration	Config 1,2		TDDConf.3.1	
$BW_{channel}$	Config 1	MHz	100: $N_{RB,c}$ = 24	
OCNG Pattern Note 1			OP.3	As defined in A.3.2.1.
PDSCH Reference Channel Note 2	Config 1,2		SR.3.1 TDD	As defined in A.3.1.1.
RMSI CORESET Reference Channel	Config 1,2		CR.3.1 TDD	As defined in A.3.1.2
Dedicated CORESET Reference Channel	Config 1,2		CCR.3.1 TDD	
NR RF Channel Number			1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH_DMRS to SSS		dB		
EPRE ratio of PBCH to PBCH_DMRS		dB		
EPRE ratio of PDCCH_DMRS to SSS		dB		
EPRE ratio of PDCCH to PDCCH_DMRS		dB		
EPRE ratio of PDSCH_DMRS to SSS		dB		
EPRE ratio of PDSCH to PDSCH_DMRS		dB		
ss-PBCH-BlockPower		dBm/ SCS	+20 +Δ_{UL}	As defined in TS 38.331 [2]. Δ_{UL} is derived from the uplink calibration process Note 3
Configured UE transmitted power ($P_{CMAX,\ f,c}$)		dBm	maximum value configurable for certain power class	As defined in clause 6.2.4 in TS 38.101-2 [19]
PRACH Configuration			FR2 PRACH configuration 1	As defined in A.3.8.3, with exceptions as defined below.
rsrp-ThresholdSSB		dBm	RSRP_69 +Δ_{DL}	RSRP_69 corresponds to -88dBm. Δ_{DL} is derived from the downlink calibration process Note 4
preambleReceivedTargetPower		dBm	-100	As defined in TS 38.331 [2]

Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.
Note 2: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.
Note 3: The Δ_{UL} value is calculated as -ROUND(P_{PRACH0} -1), where P_{PRACH0} is the measured first PRACH power with -80.6dBm/SCS applied, *preambleReceivedTargetPower* = -100dBm and *ss-PBCH-BlockPower* = 20dBm. These values are used during the uplink calibration process carried out before the test case is run, with the UE configured to send PRACH.
Note 4: The Δ_{DL} value is calculated as ($RSRP_{REP}$ – RSRP_76), where $RSRP_{REP}$ is the SS-RSRP Reported value in Table 10.1.6.1-1 with -80.6dBm/SCS applied. These values are used during the downlink calibration process carried out before the test case is run, with the UE configured to report SS-RSRP. For a Reported value RSRP_x, x is treated as a positive integer value.

Table A.5.3.2.2.1.1-3: OTA-related test parameters for contention based random access test in FR2 for PSCell/SCell in EN-DC

Parameter		Unit	Test-1	Comments
AoA setup			Setup 1	As defined in A.3.15.1
Assumption for UE beams[Note 3]			Rough	
SSB with index 0	Es [Note1]	dBm/SCS	-80.6	Power of SSB with index 0 is set to be above configured *rsrp-ThresholdSSB*
	SSB_RP	dBm/SCS	-80.6	
	Es/Iot_{BB}	dB	21.09	
	Io	dBm/95.04 MHz	-56.01	Io in symbols containing SSB index 0
SSB with index 1	Es [Note1]	dBm/SCS	-95.0	Power of SSB with index 1 is set to be below configured *rsrp-ThresholdSSB*
	SSB_RP	dBm/SCS	-95.0	
	Es/Iot_{BB}	dB	6.69	
	Io	dBm/95.04 MHz	-70.41	Io in symbols containing SSB index 1
Propagation Condition		-	AWGN	

Note 1: No articial noise is applied in this test.
Note 2: Void.
Note 3: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.5.3.2.2.1.2 Test Requirements

Contention based random access is triggered by *not* explicitly assigning a random access preamble via dedicated signalling in the downlink.

A.5.3.2.2.1.2.1 Random Access Preamble Transmission

To test the UE behavior specified in Clause 6.2.2.2.1.1 the System Simulator shall receive the Random Access Preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SS-RSRP above the configured *rsrp-ThresholdSSB*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.5.3.2.2.1.2.2 Random Access Response Reception

To test the UE behavior specified in Clause 6.2.2.2.1.2 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 2 preambles, the System Simulator shall transmit a Random Access Response *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for Random Access Response(s) and shall transmit the msg3 if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.5.3.2.2.1.2.3 No Random Access Response Reception

To test the UE behavior specified in clause 6.2.2.2.1.3 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 3 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 2 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.5.3.2.2.1.2.4 Receiving an UL grant for msg3 retransmission

To test the UE behavior specified in clause 6.2.2.2.1.4 the System Simulator shall provide an UL grant for msg3 retransmission following a successful Random Access Response.

The UE shall re-transmit the msg3 upon the reception of an UL grant for msg3 retransmission.

A.5.3.2.2.1.2.5 Void

A.5.3.2.2.1.2.6 Void

A.5.3.2.2.1.2.7 Contention Resolution Timer expiry

To test the UE behavior specified in Clause 6.2.2.2.1.6 the System Simulator shall *not* send a response to a msg3.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if the Contention Resolution Timer expires.

A.5.3.2.2.2 4-step RA type non-contention based random access test in FR2 for PSCell/SCell in EN-DC

A.5.3.2.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in clause 6.2.2.2 and clause 7.1.2 in an AWGN model.

For this test two cells are used, with the configuration of Cell 1 (E-UTRA PCell) specified in clause A.3.7.2.1 and Cell 2 configured as PSCell or SCell in FR2. Supported test parameters are shown in Table A.5.3.2.2.2.1-1. UE capable of EN-DC withPSCell or SCell in FR2 needs to be tested by using the parameters in Table A.5.3.2.2.2.1-2 and Table A.5.3.2.2.2.1-3 for SSB-based non-contention based random access test (Test 1) and CSI-RS-based non-contention based random access test (Test 2). Test 2 is only applicable to UE which supports csi-RSRP-AndRSRQ-MeasWithSSB or csi-RSRP-AndRSRQ-MeasWithoutSSB.

Table A.5.3.2.2.2.1-1: Supported test configurations for non-contention based random access test in FR2 for PSCell/SCell in EN-DC

Config	Description
1	LTE FDD, NR PSCell/SCell 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR PSCell/SCell 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations depending on UE capability	

Table A.5.3.2.2.2.1-2: General test parameters for non-contention based random access test in FR2 for PSCell/SCell in EN-DC

Parameter		Unit	Test-1	Test-2	Comments
SSB Configuration	Config 1,2		SSB.1 FR2	SSB.1 FR2	As defined in A.3.10
CSI-RS Configuration	Config 1,2		N/A	CSI-RS.3.1 TDD	As defined in A.3.1.4
CSI-RS for tracking	Config 1,2		TRS.2.1 TDD	TRS.2.1 TDD	
Duplex Mode for Cell 2	Config 1,2		TDD	TDD	
TDD Configuration	Config 1,2		TDDConf.3.1	TDDConf.3.1	
$BW_{channel}$	Config 1,2	MHz	100: $N_{RB,c}$ = 24	100: $N_{RB,c}$ = 24	
OCNG Pattern Note 1			OCNG pattern 1	OCNG pattern 1	As defined in A.3.2.1.
PDSCH Reference Channel Note 2	Config 1,2		SR3.1 TDD	SR3.1 TDD	As defined in A.3.1.1.
RMSI CORESET Reference Channel	Config 1,2		CR.3.1 TDD	CR.3.1 TDD	As defined in A.3.1.2
Dedicated CORESET Reference Channel	Config 1,2		CCR.3.1 TDD	CCR.3.1 TDD	
NR RF Channel Number			1	1	
EPRE ratio of PSS to SSS		dB	0	0	
EPRE ratio of PBCH_DMRS to SSS		dB			
EPRE ratio of PBCH to PBCH_DMRS		dB			
EPRE ratio of PDCCH_DMRS to SSS		dB			
EPRE ratio of PDCCH to PDCCH_DMRS		dB			

EPRE ratio of PDSCH_DMRS to SSS	dB			
EPRE ratio of PDSCH to PDSCH_DMRS	dB			
ss-PBCH-BlockPower	dBm/ SCS	+20 +Δ_{UL}	+20 +Δ_{UL}	As defined in TS 38.331 [2]. Δ_{UL} is derived from the uplink calibration process Note 3
Configured UE transmitted power ($P_{CMAX,\ f,c}$)	dBm	maximum value configurable for certain power class	maximum value configurable for certain power class	As defined in clause 6.2.4 in TS 38.101-2 [19]
PRACH Configuration		FR2 PRACH configuration 2	FR2 PRACH configuration 3	As defined in A.3.8.3, with exceptions as defined below
rsrp-ThresholdSSB	dBm	RSRP_69 +Δ_{DL}	RSRP_69 +Δ_{DL}	RSRP_69 corresponds to -88dBm. Δ_{DL} is derived from the downlink calibration process Note 4
preambleReceivedTargetPower	dBm	-100	-100	As defined in TS 38.331 [2]

Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.

Note 2: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.

Note 3: The Δ_{UL} value is calculated as -ROUND(P_{PRACH0} -1), where P_{PRACH0} is the measured first PRACH power with -80.6dBm/SCS applied, *preambleReceivedTargetPower* = -100dBm and *ss-PBCH-BlockPower* = 20dBm. These values are used during the uplink calibration process carried out before the test case is run, with the UE configured to send PRACH.

Note 4: The Δ_{DL} value is calculated as ($RSRP_{REP}$ – RSRP_76), where $RSRP_{REP}$ is the SS-RSRP Reported value in Table 10.1.6.1-1 with -80.6dBm/SCS applied. These values are used during the downlink calibration process carried out before the test case is run, with the UE configured to report SS-RSRP. For a Reported value RSRP_x, x is treated as a positive integer value.

Table A.5.3.2.2.2.1-3: OTA-related test parameters for non-contention based random access test in FR2 for PSCell/SCell in EN-DC

Parameter		Unit	Test-1	Test-2	Comments
AoA setup			Setup 1	Setup 1	As defined in A.3.15.1
Assumption for UE beams Note 3			Rough	Rough	
SSB with index 0	Es Note1	dBm/SCS	-80.6	-80.6	Power of SSB with index 0 is set to be above configured *rsrp-ThresholdSSB*
	SSB_RP	dBm/SCS	-80.6	-80.6	
	Es/Iot_{BB}	dB	21.09	21.09	
	Io	dBm/95.04 MHz	-56.01	-56.01	Io in symbols containing SSB index 0
SSB with index 1	Es Note1	dBm/SCS	-95.0	-95.0	Power of SSB with index 1 is set to be below configured *rsrp-ThresholdSSB*
	SSB_RP	dBm/SCS	-95.0	-95.0	
	Es/Iot_{BB}	dB	6.69	6.69	
	Io	dBm/95.04 MHz	-70.41	-70.41	Io in symbols containing SSB index 1
Propagation Condition		-	AWGN	AWGN	

Note 1:	No articial noise is applied in this test.
Note 2:	void.
Note 3:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.5.3.2.2.2.2 Test Requirements

Non-Contention based random access is triggered by explicitly assigning a random access preamble via dedicated signalling in the downlink. In the test, the non-contention based random access procedure is not initialized for Other SI requested from UE or beam failure recovery.

A.5.3.2.2.2.2.1 SSB-based Random Access Preamble Transmission

In Test-1, to test the UE behavior specified in Clause 6.2.2.2.2.1 for SSB-based Random Access Preamble tranmsision, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs configured, the System Simulator shall receive the Random Access Preamble which has the Preamble Index associated with the SSB with index 0.

In addition, the System Simulator shall receive the Random Access Preamble on the PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0, and the selected PRACH occasion shall belongs to the PRACH occassions permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.5.3.2.2.2.2.2 CSI-RS-based Random Access Preamble Transmission

In Test-2, to test the UE behavior specified in Clause 6.2.2.2.2.1 for CSI-RS-based Random Access Preamble tranmsision, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with CSI-RSs configured, the System Simulator shall receive the Random Access Preamble which has the Preamble Index associated with the CSI-RS configured.

In addition, the System Simulator shall receive the Random Access Preamble on the PRACH occasion which belongs to the PRACH occasions corresponding to the CSI-RS configured, and the selected PRACH occasion shall belongs to the PRACH occassions permitted by the restrictions given by the *ra-OccasionList*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.5.3.2.2.2.2.3 Random Access Response Reception

To test the UE behavior specified in Clause 6.2.2.2.2.2 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 3 preambles have been received by the System Simulator. In response to the first 2 preambles, the System Simulator shall transmit a Random Access Response *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for Random Access Response(s) if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS38.321 [7], and transmit with the calculated PRACH transmission power if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.5.3.2.2.2.2.4 No Random Access Response Reception

To test the UE behavior specified in clause 6.2.2.2.2.3 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window configured in *RACH-ConfigCommon*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.5.3.2.2.3 2-step RA type contention based random access test in FR2 for PSCell/SCell in EN-DC

A.5.3.2.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the MsgA power settings and timing are within specified limits. This test will verify the requirements in clause 6.2.2.3 and clause 7.1.2 in an AWGN model.

For this test two cells are used, with the configuration of Cell 1 (E-UTRA PCell) specified in clause A.3.7.2.1 and Cell 2 configured as PSCell or SCell in FR2. Supported test parameters are shown in Table A.5.3.2.2.3.1-1. UE capable of EN-DC with PSCell or SCell in FR2 needs to be tested by using the parameters in Table A.5.3.2.2.3.1-2 and Table A.5.3.2.2.3.1-3.

Table A.5.3.2.2.3.1-1: Supported test configurations for 2-step RA type contention based random access test in FR2 for PSCell/SCell in EN-DC

Config	Description
1	LTE FDD, NR PSCell/SCell 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR PSCell/SCell 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations depending on UE capability	

Table A.5.3.2.2.3.1-2: General test parameters for 2-step RA type contention based random access test in FR2 for PSCell/SCell in EN-DC

Parameter	Unit	Test-1	Comments

SSB Configuration	Config 1,2		SSB.1 FR2	As defined in A.3.10
Duplex Mode for Cell 2	Config 1,2		TDD	
TDD Configuration	Config 1,2		TDDConf.3.1	
$BW_{channel}$	Config 1	MHz	100: NRB,c = 24	
OCNG Pattern Note 1			OP.3	As defined in A.3.2.1.
PDSCH Reference Channel Note 2	Config 1,2		SR.3.1 TDD	As defined in A.3.1.1.
RMSI CORESET Reference Channel	Config 1,2		CR.3.1 TDD	As defined in A.3.1.2
RMC CORESET Reference Channel	Config 1,2		CCR.3.1 TDD	
NR RF Channel Number			1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH_DMRS to SSS		dB		
EPRE ratio of PBCH to PBCH_DMRS		dB		
EPRE ratio of PDCCH_DMRS to SSS		dB		
EPRE ratio of PDCCH to PDCCH_DMRS		dB		
EPRE ratio of PDSCH_DMRS to SSS		dB		
EPRE ratio of PDSCH to PDSCH_DMRS		dB		
ss-PBCH-BlockPower		dBm/ SCS	+20 +ΔUL	As defined in TS 38.331 [2]. ΔUL is derived from the uplink calibration process Note 3
Configured UE transmitted power ($P_{CMAX,\ f,c}$)		dBm	maximum value configurable for certain power class	As defined in clause 6.2.4 in TS 38.101-2 [19]
MsgA Configuration			FR2 MsgA configuration 1	As defined in A.3.20.3.1, with exceptions as defined below.
msgA-RSRP-ThresholdSSB		dBm	RSRP_69 +ΔDL	RSRP_69 corresponds to -88dBm. ΔDL is derived from the downlink calibration process Note 4
msgA-PreambleReceivedTargetPower		dBm	-100	As defined in TS 38.331 [2]

Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.

Note 2: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.

Note 3: The Δ_{UL} value is calculated as -ROUND(P_{MsgA0} -1), where P_{MsgA0} is the measured first MsgA PRACH power with -80.6dBm/SCS applied, *msgA-PreambleReceivedTargetPower* = -100dBm and *ss-PBCH-BlockPower* = 20dBm. These values are used during the uplink calibration process carried out before the test case is run, with the UE configured to send MsgA.

Note 4: The Δ_{DL} value is calculated as ($RSRP_{REP}$ – RSRP_76), where $RSRP_{REP}$ is the SS-RSRP Reported value in Table 10.1.6.1-1 with -80.6dBm/SCS applied. These values are used during the downlink calibration process carried out before the test case is run, with the UE configured to report SS-RSRP. For a Reported value RSRP_x, x is treated as a positive integer value.

Table A.5.3.2.2.3.1-3: OTA-related test parameters for 2-step RA type contention based random access test in FR2 for PSCell/SCell in EN-DC

Parameter		Unit	Test-1	Comments
AoA setup			Setup 1	As defined in A.3.15.1
Assumption for UE beams Note 2			Rough	
SSB with index 0	Es Note1	dBm/SCS	-80.6	Power of SSB with index 0 is set to be above configured *msgA-RSRP-ThresholdSSB*
	SSB_RP	dBm/SCS	-80.6	

	Es/Iot_{BB}	dB	21.09	
	Io	dBm/95.04 MHz	-56.01	Io in symbols containing SSB index 0
SSB with index 1	Es Note1	dBm/SCS	-95.0	Power of SSB with index 1 is set to be below configured *msgA-RSRP-ThresholdSSB*
	SSB_RP	dBm/SCS	-95.0	
	Es/Iot_{BB}	dB	6.69	
	Io	dBm/95.04 MHz	-70.41	Io in symbols containing SSB index 1
Propagation Condition		-	AWGN	
Note 1: No artificial noise is applied in this test. Note 2: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.5.3.2.2.3.2 Test Requirements

Contention based random access is triggered by *not* explicitly assigning a random access preamble via dedicated signalling in the downlink.

A.5.3.2.2.3.2.1 MsgA Transmission

To test the UE behaviour specified in Clause 6.2.2.3.1.1 the System Simulator shall receive the Random Access Preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SS-RSRP above the configured *msgA-RSRP-ThresholdSSB.*

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first MsgA preamble transmission shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all MsgA PRACH and MsgA PUSCH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.5.3.2.2.3.2.2 MsgB Reception

To test the UE behaviour specified in Clause 6.2.2.3.1.2 the System Simulator shall transmit a MsgB with successRAR containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 2 preambles, the System Simulator shall transmit a MsgB *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for MsgB(s) and shall transmit an ACK if the MsgB with a successRAR contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble and if the Contention Resolution is successful.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS38.321 [7], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires if all received MsgBs contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first MsgA preamble transmission shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.5.3.2.2.3.2.3 No MsgB Reception

To test the UE behaviour specified in clause 6.2.2.3.1.3 the System Simulator shall transmit a MsgB with successRAR containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 3 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 2 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS38.321 [7], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires if no MsgB is received within the RA Response window.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first MsgA preamble transmission shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all MsgA PRACH and MsgA PUSCH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.5.3.2.2.4 2-step RA type non-contention based random access test in FR2 for PSCell/SCell in EN-DC

A.5.3.2.2.4.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the MsgA power settings and timing are within specified limits. This test will verify the requirements in clause 6.2.2.3 and clause 7.1.2 in an AWGN model.

For this test two cells are used, with the configuration of Cell 1 (E-UTRA PCell) specified in clause A.3.7.2.1 and Cell 2 configured as PSCell or SCell in FR2. Supported test parameters are shown in Table A.5.3.2.2.4.1-1. UE capable of EN-DC with PSCell or SCell in FR2 needs to be tested by using the parameters in Table A.5.3.2.2.4.1-2 and Table A.5.3.2.2.4.1-3 for SSB-based non-contention based random access test.

Table A.5.3.2.2.4.1-1: Supported test configurations for non-contention based random access test in FR2 for PSCell/SCell in EN-DC

Config	Description
1	LTE TDD, NR PSCell/SCell 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations depending on UE capability	

Table A.5.3.2.2.4.1-2: General test parameters for non-contention based random access test in FR2 for PSCell/SCell in EN-DC

Parameter		Unit	Test-1	Comments
SSB Configuration	Config 1		SSB.1 FR2	As defined in A.3.10
Duplex Mode for Cell 2	Config 1		TDD	
TDD Configuration	Config 1		TDDConf.3.1	
$BW_{channel}$	Config 1	MHz	100: $N_{RB,c}$ = 24	
OCNG Pattern Note 1			OCNG pattern 1	As defined in A.3.2.1.
PDSCH Reference Channel Note 2	Config 1		SR3.1 TDD	As defined in A.3.1.1.

RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD	As defined in A.3.1.2
RMC CORESET Reference Channel	Config 1		CCR.3.1 TDD	
NR RF Channel Number			1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH_DMRS to SSS		dB		
EPRE ratio of PBCH to PBCH_DMRS		dB		
EPRE ratio of PDCCH_DMRS to SSS		dB		
EPRE ratio of PDCCH to PDCCH_DMRS		dB		
EPRE ratio of PDSCH_DMRS to SSS		dB		
EPRE ratio of PDSCH to PDSCH_DMRS		dB		
ss-PBCH-BlockPower		dBm/ SCS	+20 +Δ_{UL}	As defined in TS 38.331 [2]. Δ_{UL} is derived from the uplink calibration process Note 3
Configured UE transmitted power ($P_{CMAX,\ f,c}$)		dBm	maximum value configurable for certain power class	As defined in clause 6.2.4 in TS 38.101-2 [19]
MsgA Configuration			FR2 MsgA configuration 2	As defined in A.3.20.3.2, with exceptions as defined below
msgA-*RSRP-ThresholdSSB*		dBm	RSRP_69 +Δ_{DL}	RSRP_69 corresponds to -88dBm. Δ_{DL} is derived from the downlink calibration process Note 4
preambleReceivedTargetPower		dBm	-100	As defined in TS 38.331 [2]

Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.

Note 2: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.

Note 3: The Δ_{UL} value is calculated as -ROUND(P_{MsgA0} -1), where P_{MsgA0} is the measured first MsgA PRACH power with -80.6dBm/SCS applied, *msgA-PreambleReceivedTargetPower* = -100dBm and *ss-PBCH-BlockPower* = 20dBm. These values are used during the uplink calibration process carried out before the test case is run, with the UE configured to send MsgA.

Note 4: The Δ_{DL} value is calculated as ($RSRP_{REP}$ – RSRP_76), where $RSRP_{REP}$ is the SS-RSRP Reported value in Table 10.1.6.1-1 with -80.6dBm/SCS applied. These values are used during the downlink calibration process carried out before the test case is run, with the UE configured to report SS-RSRP. For a Reported value RSRP_x, x is treated as a positive integer value.

Table A.5.3.2.2.4.1-3: OTA-related test parameters for non-contention based random access test in FR2 for PSCell/SCell in EN-DC

Parameter	Unit	Test-1	Comments
AoA setup		Setup 1	As defined in A.3.15.1
Assumption for UE beams Note 2		Rough	

SSB with index 0	Es Note1	dBm/SCS	-80.6	Power of SSB with index 0 is set to be above configured msgA-*RSRP-ThresholdSSB*
	SSB_RP	dBm/SCS	-80.6	
	Es/Iot_{BB}	dB	21.09	
	Io	dBm/95.04 MHz	-56.01	Io in symbols containing SSB index 0
SSB with index 1	Es Note1	dBm/SCS	-95.0	Power of SSB with index 1 is set to be below configured msgA-*RSRP-ThresholdSSB*
	SSB_RP	dBm/SCS	-95.0	
	Es/Iot_{BB}	dB	6.69	
	Io	dBm/95.04 MHz	-70.41	Io in symbols containing SSB index 1
Propagation Condition		-	AWGN	
Note 1: No articial noise is applied in this test. Note 2: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.5.3.2.2.4.2 Test Requirements

Non-Contention based random access is triggered by explicitly assigning a random access preamble via dedicated signalling in the downlink. In the test, the non-contention based random access procedure is not initialized for Other SI requested from UE or beam failure recovery.

A.5.3.2.2.4.2.1 MsgA Transmission

To test the UE behavior specified in Clause 6.2.2.3.2.1, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs configured, the System Simulator shall receive the MsgA with a preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0.

In addition, the System Simulator shall receive the MsgA PRACH on the PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0, and the selected PRACH occasion shall belongs to the PRACH occasions permitted by the restrictions given first by the *msgA-SSB-SharedRO-MaskIndex* if configured, or next by the *ra-ssb-OccasionMaskIndex* if configured.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.5.3.2.2.4.2.3 MsgB Reception

To test the UE behavior specified in Clause 6.2.2.3.2.2 the System Simulator shall transmit a MsgB containing a fallbackRAR MAC subPDU.

The UE shall fallback to the 4-step RA type by transmitting the msg3 containing the payload of MsgA PUSCH and monitoring contention resolution as described in clause 8.2A in TS 38.213 [3].

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all MsgA and msg3 transmissions shall be within the accuracy specified in Clause 7.1.2.

A.5.3.2.2.4.2.4 No MsgB Reception

To test the UE behavior specified in clause 6.2.2.3.2.3 the System Simulator shall transmit a MsgB containing a successRAR message and a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA transmission power when the backoff time expires if no MsgB is received within the MsgB Response window.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.5.3.2.3 Void

A.5.3.3 Handover with PSCell with known FR2 target PSCell

A.5.3.3.1 Test purpose and environment

The purpose of this test is to verify that the NR PSCell change delays in handover with PSCell from EN-DC to EN-DC are within the requirements stated in clause 5.8 of TS 36.133 [15] for the case when the source PSCell is in FR1 and the target PSCell in FR2 is known by the UE at the time of handover with PSCell.

Supported test configurations are shown in A.5.3.3.1-1. The test parameters for the E-UTRA cells are given in Table A.3.7.2.2-1. The E-UTRA Cell 1 will handover to E-UTRA Cell 2 in this test case. The test parameters for NR cells are given in Tables A.5.3.3.1-2, cell-specific parameters in A.5.3.3.1-3 and OTA parameters in A.5.3.3.1-4 below. The test consists of three successive time periods with duration of T1, T2 and T3. There are four carriers each with one cell. Before the test starts the UE is connected to Cell 1 (PCell) on E-UTRA and Cell 2 (PSCell) on NR, but is not aware of Cell 3 (SCell) on E-UTRA and Cell 4 (SCell) on NR. The UE is monitoring the PCell and PSCell.

The test system shall send a RRC message to the UE to handover with PSCell (target PCell Cell 2, target PSCell Cell 4). The RRC message (to handover with PSCell) also includes a request for the UE to start periodic CSI reporting for the PSCell after the PSCell has been successfully added. The RRC message to handover with PSCell shall be sent to the UE during period T1. The point in time at which the RRC message to handover with PSCell (Cell2, Cell 4) is received at the UE antenna connector defines the start of period T2.

The test system shall observe the periodic reporting of CSI for the target PSCell during T3. The point in time at which the UE has sent PRACH to the target PSCell (Cell 4) defines the start of period T3.

Table A.5.3.3.1-1: Supported test configurations for Handover with PSCell

Configuration	Description
1	Cell 1 LTE FDD, Cell 2 LTE FDD, Cell 3 NR FDD 15kHz SSB SCS, 10MHz bandwidth, Cell 4 NR TDD 120kHz SSB SCS, 100MHz bandwidth
2	Cell 1 LTE FDD, Cell 2 LTE FDD, Cell 3 NR TDD 15kHz SSB SCS, 10MHz bandwidth, Cell 4 NR TDD 120kHz SSB SCS, 100MHz bandwidth
3	Cell 1 LTE FDD,

	Cell 2 LTE FDD, Cell 3 NR TDD 30kHz SSB SCS, 40MHz bandwidth, Cell 4 NR TDD 120kHz SSB SCS, 100MHz bandwidth
4	Cell 1 LTE TDD, Cell 2 LTE TDD, Cell 3 NR FDD 15kHz SSB SCS, 10MHz bandwidth, Cell 4 NR TDD 120kHz SSB SCS, 100MHz bandwidth
5	Cell 1 LTE TDD, Cell 2 LTE TDD, Cell 3 NR TDD 15kHz SSB SCS, 10MHz bandwidth, Cell 4 NR TDD 120kHz SSB SCS, 100MHz bandwidth
6	Cell 1 LTE TDD, Cell 2 LTE TDD, Cell 3 NR TDD 30kHz SSB SCS, 40MHz bandwidth, Cell 4 NR TDD 120kHz SSB SCS, 100MHz bandwidth
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.5.3.3.1-2: General Test Parameters for Handover with PSCell

Parameter		Unit	Value	Comment
RF Channel Number			1, 2,3,4	Two E-UTRAN radio channel (1,2) and two NR radio channel (3,4) are used for this test
Initial Condition	Active PCell		Cell 1	PCell on E-UTRAN RF channel number 1. As specified in clause A.3.7.2.1
	Neighbour Cell		Cell 2	Neighbour cell on E-UTRAN RF channel number 2. As specified in clause A.3.7.2.1
	Active PSCell		Cell 3	PSCell on NR RF channel number 3.
	Neighbour Cell		Cell 4	Neighbour cell on NR RF channel number 4.
Final Condition	Active PCell		Cell 2	
	Neighbour Cell		Cell 1	
	Active PSCell		Cell 4	
	Neighbour Cell		Cell 3	
Access Barring Information			Not Sent	No additional delays in random access procedure.
DRX			OFF	Continuous monitoring of primary cell
PRACH configuration on Cell 4			FR2 configuration 2	Captured in A.3.8.3.2
Cell-individual offset for cells on E-UTRAN RF channel		dB	0	Individual offset for cells on primary component carrier.
Cell-individual offset for cells on NR RF channel		dB	0	Individual offset for cells on second component carrier
T1		s	1	During this time the PCell and PSCell shall be known and SCells configured and detected.
T2		s	0.5	During this time the UE change the PSCell.
T3		s	1	During this time the UE sends CSI reports for PSCell.

Table A.5.3.3.1-3: Cell specific test parameters for Handover with PSCell

Parameter		Unit	Cell 3			Cell 4		
			T1	T2	T3	T1	T2	T3
SSB ARFCN			Freq1			Freq2		
Duplex mode	Config 1,4		FDD			TDD		
	Config 2,3,5,6		TDD			TDD		
TDD configuration	Config 1,4		Not Applicable			TDDConf.3.1		
	Config 2,5		TDDConf.1.1					
	Config 3,6		TDDConf.2.1					
$BW_{channel}$	Config 1,4	MHz	10: $N_{RB,c}$ = 52			100: $N_{RB,c}$ = 66		
	Config 2,5		10: $N_{RB,c}$ = 52					

	Config 3,6		40: $N_{RB,c}$ = 106	
Data RBs allocated	Config 1,4		52	66
	Config 2,5		52	
	Config 3,6		106	
DL initial BWP configuration	Config 1~6		DLBWP.0.1	
DL dedicated BWP configuration	Config 1~6		DLBWP.1.1	
UL initial BWP configuration	Config 1~6		ULBWP.0.1	
UL dedicated BWP configuration	Config 1~6		ULBWP.1.1	
DRX Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	SR.3.1 TDD
	Config 2,5		SR.1.1 TDD	
	Config 3,6		SR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	CR.3.1 TDD
	Config 2,5		CR.1.1 TDD	
	Config 3,6		CR.2.1 TDD	
RMC CORESET Reference Channel	Config 1,4		CCR.1.1 FDD	CCR.3.1 TDD
	Config 2,5		CCR.1.1 TDD	
	Config 3,6		CCR.2.1 TDD	
OCNG Patterns			OP.1	
SMTC configuration			SMTC.1	
TCI state			NA	TCI.State.0
TRS configuration	Config 1,4		TRS.1.1 FDD	TRS.2.1 TDD
	Config 2,5		TRS.1.1 TDD	
	Config 3,6		TRS.1.2 TDD	
SSB configuration	Config 1,2,4,5		SSB.1 FR1	SSB.1 FR2
	Config 3,6		SSB.2 FR1	
CSI-RS configuration for CSI reporting	Config 1,4		CSI-RS.1.1 FDD	CSI-RS.3.1 TDD
	Config 2,5		CSI-RS.1.1 TDD	
	Config 3,6		CSI-RS.2.1 TDD	
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15kHz	120kHz
	Config 3,6		30kHz	
reportConfigType	Config 1~6		N/A	Periodic
reportQuantity	Config 1~6		N/A	cri-RI-PMI-CQI
CSI reporting periodicity	Config 1~6	slot	N/A	40
CSI reporting offset	Config 1~6	slot	N/A	4
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
Propagation condition			NA Link only, see clause A.3.7A	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				

Table A.5.3.3.1-4: OTA related test parameters for Handover with PSCell

Parameter	Unit	Cell 3	Cell 4

			T1	T2	T3	T1	T2	T3
Angle of arrival configuration			NA Link only, see clause A.3.7A			Setup 1 according to clause A.3.15.1		
Assumption for UE beams Note 5						Rough		
N_{oc} Note1		dBm/15kHz				-104.7		
N_{oc} Note1	Config 1,2,4,5	dBm/SCS				-95.7		
	Config 3,6							
SSB_RP Note2	Config 1,2,4,5	dBm/SCS Note3				-88.7		
	Config 3,6							
$\hat{E}_s / N_{oc}$	Config 1~12	dB				7		
$\hat{E}_s / I_{ot}$ Note2		dB				7		
Io Note2	Config 1~12	dBm/ChBW Note3,Note4				-58.92		

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 2: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 3: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone

Note 4: ChBW is 94.04 MHz for Cell4, 9.36 MHz for Cell 3 in configurations 1,2,4,5,7,8,10,11, 38.1 MHz in configurations 3,6,9,12.

Note 5: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.5.3.3.2 Test Requirements

The UE shall transmit the PRACH to PSCell at latest 107 ms Note1 into T2.

The UE shall send at least one CSI report for PSCell with non-zero CQI index during T3.

The UE shall periodically send CSI reports for PSCell after the UE has sent first CQI report with non-zero CQI index during T3

All the above test requirements shall be fulfilled for the observed PSCell change delay to be counted as correct. The rate of correct observed PSCell change delay during repeated tests shall be at least 90%.

Note1: The PSCell change delay can be expressed as follows as specified in clause 5.8.1.2 of TS 36.133 [15]:

$$D_{HOwithPSCel_PSCell} = T_{RRC_delay} + T_{processing} + T_{search} + T_{\Delta} + T_{PSCell_DU} + T_{PCell_DU} + 2 \text{ ms}$$

Where:

T_{RRC_delay} = 20 ms

$T_{processing}$ = 45 ms

T_{search} = 0 ms

T_{Δ} = 20 ms

T_{PSCell_DU} = 1*10+10 = 20 ms

T_{PCell_DU} = 0 ms

A.5.5.3.3 PUCCH SCell Activation and deactivation of known SCell in FR2

A.5.5.3.3.1 Test Purpose and Environment

The purpose of this test is to verify that the PUCCH SCell activation and deactivation times are within the requirements stated in clause 8.3, when the PUCCH SCell is in FR2.

The supported test configurations are shown in table A.5.5.3.3.1-1 below. The test parameters are the same as in clause A.4.5.3.3.1 except those described in the following clause. The listed parameter values in Tables A.5.5.3.3.1-2 will replace the values of corresponding parameters in Tables A.4.5.3.3.1-2. The listed parameter values in Tables A.5.5.3.3.1-3 will replace the values of corresponding parameters in Tables A.4.5.3.3.1-3. In this case, OTA related test parameters are shown in table A.5.5.3.3.1-4 below.

The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are three carriers, E-UTRA has one cell (Cell 1), and NR has two cells, PSCell (Cell 2) in FR1 and PUCCH SCell (Cell 3) in FR2. Cell 1 and Cell 2 have constant signal levels throughout the test. Cell1, Cell2 and Cell 3 are in primary Timing Advance Group (pTAG). UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment for sTAG.

Before the test starts the UE is connected to Cell 1 (PCell) on E-UTRAN and Cell 2 (PSCell) on NR, but is not aware of Cell 3 (PUCCH SCell) on NR. The UE is monitoring the PCell and PSCell. The UE shall be continuously scheduled in the PCell and PSCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the PUCCH SCell (Cell 3) becomes configured on NR. The UE now starts monitoring the SCC. The test equipment sends a MAC message for activation of the PUCCH SCell.

The point in time at which the MAC message is received at the UE antenna connector provided that the HARQ ACK of the MAC message is received by TE, in slot # denoted n, defines the start of time period T2. The UE shall be able to report valid CSI on for the activated PUCCH SCell on PUCCH SCell at latest in slot n + $\frac{T_{\text{HARQ}} + T_{\text{activation_time}} + \lceil X \rceil + T_{\text{CSI_Reporting}}}{\text{NR slot length}}$, as defined in clause 8.3.

Time period T3 starts when a MAC message for deactivation of PUCCH SCell, sent from the test equipment to the UEin a slot # denoted m, is received at the UE antenna connector provided that the HARQ ACK of the MAC message is received by TE. The UE shall carry out deactivation of the PUCCH SCell in a slot m + $\frac{\text{T}_{\text{HARQ}} + 3ms}{NR\ slot\ length}$, as defined in clause 8.3.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell and PSCell during activation of PUCCH SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the PUCCH SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The test equipment verifies the deactivation time by counting the slots from the time when the PUCCH SCell deactivation command is sent until CSI reporting for PUCCH SCell is discontinued.

Table A.5.5.3.3.1-1: FR2 SCell activation in non-DRX test configurations with FR1 PSCell

Configuration	Description
1	LTE FDD PCell, Cell 2 NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Cell 3 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE FDD PCell, Cell 2 NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Cell 3 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
3	LTE FDD PCell, Cell 2 NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Cell 3 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
4	LTE TDD PCell, Cell 2 NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Cell 3 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
5	LTE TDD PCell, Cell 2 NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode

	Cell 3 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
6	LTE TDD PCell, Cell 2 NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Cell 3 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.5.5.3.3.1-2: General test parameters for FR2 SCell activation case with FR1 PSCell

Parameter	Unit	Value	Comment
Active PCell		Cell 1	Primary cell on E-UTRAN RF channel number 1. As specified in clause A.3.7.2.2
T2	s	2	During this time the UE shall activate the SCell.

Table A.5.5.3.3.1-3: Cell specific test parameters for FR2 SCell activation case with FR1 PSCell

Parameter		Unit	Cell 2			Cell 3		
			T1	T2	T3	T1	T2	T3
SSB ARFCN			freq1			freq2		
Duplex mode	Config 1,4		FDD			TDD		
	Config 2,3,5,6		TDD			TDD		
TDD configuration	Config 1,4		Not Applicable			TDDConf.3.1		
	Config 2,5		TDDConf.1.1					
	Config 3,6		TDDConf.2.1					
$BW_{channel}$	Config 1,4	MHz	10: $N_{RB,c}$ = 52			100: $N_{RB,c}$ = 66		
	Config 2,5		10: $N_{RB,c}$ = 52					
	Config 3,6		40: $N_{RB,c}$ = 106					
Data RBs allocated	Config 1,4		52			66		
	Config 2,5		52					
	Config 3,6		106					
BWP BW	Config 1,4		10: $N_{RB,c}$ = 52			100: $N_{RB,c}$ = 66		
	Config 2,5		10: NRB,c = 52					
	Config 3,6		40: NRB,c = 106					
DRx Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD			SR.3.1 TDD		
	Config 2,5		SR.1.1 TDD					
	Config 3,6		SR.2.1 TDD					
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD			CR.3.1 TDD		
	Config 2,5		CR.1.1 TDD					
	Config 3,6		CR.2.1 TDD					
RMC CORESET Reference Channel	Config 1,4		CCR.1.1 FDD			CCR.3.1 TDD		
	Config 2,5		CCR.1.1 TDD					
	Config 3,6		CCR.2.1 TDD					
OCNG Patterns			OP.1					
SMTC configuration			SMTC.1					
TCI state			NA			TCI.State.0		
TRS configuration	Config 1,4		TRS.2.1 TDD			TRS.2.1 TDD		
	Config 2,5		TRS.1.1 TDD					
	Config 3,6		TRS.1.2 TDD					
SSB configuration	Config 1,2,4,5		SSB.1 FR1			SSB.1 FR2		
	Config 3,6		SSB.2 FR1					
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15 kHz			120 kHz		
	Config 3,6		30 kHz					

CSI-RS configuration	Config 1~6		NA	NA	CSI-RS.3.1 TDD Note 5
reportConfigType	Config 1~6		NA	periodic	
reportQuantity	Config 1~6		NA	cri-RI-PMI-CQI	
CSI reporting periodicity Note 6	Config 1~6	slot	NA	40	
CSI reporting offset	Config 1~6	slot	NA	4	
EPRE ratio of PSS to SSS		dB	0		
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
Propagation condition		-	N/A Link only, see clause A.3.7A	AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: Void
Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.
Note 5: CSI-RS for CSI measurement is (re)configured in the next DL slot after slot m+$T_{L1\text{-}RSRP}$ during T2.
Note 6: L1-RSRP measurement and reporting are configured to the the UE prior to the start of time period T1.

Table A.5.5.3.3.1-4: OTA related test parameters for FR2 SCell activation case with FR1 PSCell

Parameter		Unit	Cell 2			Cell 3		
			T1	T2	T3	T1	T2	T3
Angle of arrival configuration			NA			Setup 1 according to clause A.3.15.1		
Assumption for UE beams Note 7			NA			Rough		
N_{oc} Note1		dBm/15kHz	Link only, see clause A.3.7A			-104.7		
N_{oc} Note1	Config 1,2,4,5	dBm/SCS				-95.7		
	Config 3,6							
SSB_RP Note2	Config 1,2,4,5	dBm/SCS Note3				-88.7	-88.7	-88.7
	Config 3,6							
$\hat{E}_s/N_{oc}$	Config 1,2,3,4,5,6	dB				7	7	7
$\hat{E}_s/I_{ot}$		dB				7	7	7
Io Note2, Note 4	Config 1,2,4,5	dBm/95.04 MHz				-58.92	-58.92	-58.92
	Config 3,6							

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: Void
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: Void
Note 6: Void

Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.

A.5.5.3.3.2 Test Requirements

During T2 the UE shall start sending CSI reports for PUCCH SCell with non-zero CQI index at latest in a slot n + $\frac{T_{\text{HARQ}}+T_{\text{activation_time}}+[X]+T_{\text{CSI_Reporting}}}{\text{NR slot length}}$, $T_{activation_time} = T_{FirstSSB} + 5ms$, as defined in clause 8.3.

During T3 the UE shall stop sending CSI reports for PUCCH SCell at latest in a slot m + $\frac{T_{\text{HARQ}}+3\text{ms}}{NR\ slot\ length}$, as defined in clause 8.3.

All of the above test requirements shall be fulfilled in order for the observed PUCCH SCell activation delay and PUCCH SCell deactivation delay to be counted as correct. The rate of correct observed PUCCH SCell activation delay and PUCCH SCell deactivation delay during repeated tests shall be at least 90%.

NOTE: During T2 if there are no uplink resources for reporting the valid CSI in slot n + $\frac{T_{\text{HARQ}}+T_{\text{activation_time}}+[X]+T_{\text{CSI_Reporting}}}{\text{NR slot length}}$ then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

A.5.5.3.4 PUCCH SCell Activation and deactivation of unknown SCell in FR2

A.5.5.3.4.1 Test Purpose and Environment

The purpose of this test is to verify that the PUCCH SCell activation and deactivation times are within the requirements stated in clause 8.3, when the PUCCH SCell is in FR2.

The supported test configurations are shown in table A.5.5.3.4.1-1 below. The test parameters are the same as in clause A.4.5.3.3.1 except those described in the following clause. The listed parameter values in Tables A.5.5.3.4.1-2 will replace the values of corresponding parameters in Tables A.4.5.3.3.1-2. The listed parameter values in Tables A.5.5.3.4.1-3 will replace the values of corresponding parameters in Tables A.4.5.3.3.1-3. In this case, OTA related test parameters are shown in table A.5.5.3.4.1-4 below.

The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are three carriers, E-UTRA has one cell (Cell 1), and NR has two cells, PSCell (Cell 2) in FR1 and PUCCH SCell (Cell 3) in FR2. Cell 1 and Cell 2 have constant signal levels throughout the test.

Cell1, Cell2 are in primary Timing Advance Group (pTAG), and Cell3 is in secondary Timing Advance Group (sTAG). The TimeAlignmentTimer of sTAG expires before receiving the activation command.

Before the test starts the UE is connected to Cell 1 (PCell) on E-UTRAN and Cell 2 (PSCell) on NR, but is not aware of Cell 3 (PUCCH SCell) on NR. The UE is monitoring the PCell and PSCell. The UE shall be continuously scheduled in the PCell and PSCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the PUCCH SCell (Cell 3) becomes configured on NR.

The point in time at which the MAC message is received at the UE antenna connector provided that the HARQ ACK of the MAC message is received by TE, in slot # denoted n, defines the start of time period T2. The UE shall be able to report valid CSI on for the activated PUCCH SCell on PUCCH SCell at latest in slot n + $\frac{T_{\text{HARQ}}+T_{delay_PUCCH_SCell}}{\text{NR slot length}}$, as defined in clause 8.3.

Time period T3 starts when a MAC message for deactivation of PUCCH SCell, sent from the test equipment to the UEin a slot # denoted m, is received at the UE antenna connector provided that the HARQ ACK of the MAC

message is received by TE. The UE shall carry out deactivation of the PUCCH SCell in a slot $m + \frac{T_{HARQ} + 3ms}{NR\ slot\ length}$, as defined in clause 8.3.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell and PSCell during activation of PUCCH SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the PUCCH SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The test equipment verifies the deactivation time by counting the slots from the time when the PUCCH SCell deactivation command is sent until CSI reporting for PUCCH SCell is discontinued.

Table A.5.5.3.4.1-1: FR2 SCell activation in non-DRX test configurations with FR1 PSCell

Configuration	Description
1	LTE FDD PCell, Cell 2 NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Cell 3 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE FDD PCell, Cell 2 NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Cell 3 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
3	LTE FDD PCell, Cell 2 NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Cell 3 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
4	LTE TDD PCell, Cell 2 NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Cell 3 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
5	LTE TDD PCell, Cell 2 NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Cell 3 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
6	LTE TDD PCell, Cell 2 NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Cell 3 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.5.5.3.4.1-2: General test parameters for FR2 SCell activation case with FR1 PSCell

Parameter	Unit	Value	Comment
Active PCell		Cell 1	Primary cell on E-UTRAN RF channel number 1. As specified in clause A.3.7.2.2
T2	s	2	During this time the UE shall activate the SCell.

Table A.5.5.3.4.1-3: Cell specific test parameters for FR2 SCell activation case with FR1 PSCell

Parameter		Unit	Cell 2			Cell 3		
			T1	T2	T3	T1	T2	T3
SSB ARFCN			freq1			freq2		
Duplex mode	Config 1,4		FDD			TDD		
	Config 2,3,5,6		TDD			TDD		
TDD configuration	Config 1,4		Not Applicable			TDDConf.3.1		
	Config 2,5		TDDConf.1.1					
	Config 3,6		TDDConf.2.1					
$BW_{channel}$	Config 1,4	MHz	10: $N_{RB,c}$ = 52			100: $N_{RB,c}$ = 66		
	Config 2,5		10: $N_{RB,c}$ = 52					
	Config 3,6		40: $N_{RB,c}$ = 106					
Data RBs allocated	Config 1,4		52			66		
	Config 2,5		52					
	Config 3,6		106					

BWP BW	Config 1,4		10: $N_{RB,c}$ = 52	100: $N_{RB,c}$ = 66
	Config 2,5		10: NRB,c = 52	
	Config 3,6		40: NRB,c = 106	
DRx Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	SR.3.1 TDD
	Config 2,5		SR.1.1 TDD	
	Config 3,6		SR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	CR.3.1 TDD
	Config 2,5		CR.1.1 TDD	
	Config 3,6		CR.2.1 TDD	
RMC CORESET Reference Channel	Config 1,4		CCR.1.1 FDD	CCR.3.1 TDD
	Config 2,5		CCR.1.1 TDD	
	Config 3,6		CCR.2.1 TDD	
OCNG Patterns			OP.1	
SMTC configuration			SMTC.1	
TCI state			NA	TCI.State.0
TRS configuration	Config 1,4		TRS.2.1 TDD	TRS.2.1 TDD
	Config 2,5		TRS.1.1 TDD	
	Config 3,6		TRS.1.2 TDD	
SSB configuration	Config 1,2,4,5		SSB.1 FR1	SSB.1 FR2
	Config 3,6		SSB.2 FR1	
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15 kHz	120 kHz
	Config 3,6		30 kHz	
CSI-RS configuration	Config 1~6		NA	NA / CSI-RS.3.1 TDD Note 5
reportConfigType	Config 1~6		NA	periodic
reportQuantity	Config 1~6		NA	cri-RI-PMI-CQI
CSI reporting periodicity Note 6	Config 1~6	slot	NA	40
CSI reporting offset	Config 1~6	slot	NA	4
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
Propagation condition		-	N/A Link only, see clause A.3.7A	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: Void
Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.
Note 5: CSI-RS for CSI measurement is (re)configured in the next DL slot after slot m+$T_{L1\text{-}RSRP}$ during T2.
Note 6: L1-RSRP measurement and reporting are configured to the the UE prior to the start of time period T1.

Table A.5.5.3.4.1-4: OTA related test parameters for FR2 SCell activation case with FR1 PSCell

Parameter	Unit	Cell 2			Cell 3		
		T1	T2	T3	T1	T2	T3

Angle of arrival configuration			NA	Setup 1 according to clause A.3.15.1		
Assumption for UE beams[Note 7]			NA	Rough		
N_{oc} [Note1]		dBm/15kHz	Link only, see clause A.3.7A	-104.7		
N_{oc} [Note1]	Config 1,2,4,5	dBm/SCS		-95.7		
	Config 3,6					
SSB_RP[Note2]	Config 1,2,4,5	dBm/SCS [Note3]		-88.7	-88.7	-88.7
	Config 3,6					
$\hat{E}_s/N_{oc}$	Config 1,2,3,4,5,6	dB		7	7	7
$\hat{E}_s/I_{ot}$		dB		7	7	7
Io[Note2, Note 4]	Config 1,2,4,5	dBm/95.04 MHz		-58.92	-58.92	-58.92
	Config 3,6					

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: Void
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: Void
Note 6: Void
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.

A.5.5.3.4.2 Test Requirements

During T2 the UE shall start sending CSI reports for PUCCH SCell with non-zero CQI index at latest in a slot n + $\frac{T_{\text{HARQ}}+T_{delay_PUCCH_SCell}}{\text{NR slot length}}$, as defined in clause 8.3.

During T3 the UE shall stop sending CSI reports for PUCCH SCell at latest in a slot m + $\frac{T_{\text{HARQ}}+3\text{ms}}{NR\,slot\,length}$, as defined in clause 8.3.

All of the above test requirements shall be fulfilled in order for the observed PUCCH SCell activation delay and PUCCH SCell deactivation delay to be counted as correct. The rate of correct observed PUCCH SCell activation delay and PUCCH SCell deactivation delay during repeated tests shall be at least 90%.

NOTE: During T2 if there are no uplink resources for reporting the valid CSI in slot n + $\frac{T_{\text{HARQ}}+T_{delay_PUCCH_SCell}}{\text{NR slot length}}$ then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

A.5.5.3.5 Multiple SCell activation and deactivation of one known PUCCH SCell and one unknown SCell in FR2

A.5.5.3.5.1 Test Purpose and Environment

The purpose of this test is to verify that the PUCCH SCell with multiple SCell activation and deactivation delay requirement defined in clause 8.3, and interruption requirement defined in clause 8.2, when one known PUCCH SCell and one unknown SCell to be activated are in FR2.

The supported test configurations are shown in Table A.5.5.3.5.1-1 below. The general test parameters are given in Table A.5.5.3.5.1-2 and cell-specific test parameters in Table A.5.5.3.5.1-3 below. OTA related test parameters are shown in table A.5.5.3.5.1-4.

The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are four carriers, one E-UTRA cell, and three NR cells. Before the test starts the UE is connected to Cell 1 (PCell) on the E-UTRA carrier and Cell 2 (PSCell) on the NR carrier in FR2, but is not aware of Cell 3 (PUCCH SCell) or Cell 4 (SCell) on the NR carriers both in FR2. Cell 2 and Cell 4 are in the primary PUCCH group, and Cell 3 is in the secondary PUCCH group. In addition, Cell 2 and Cell 4 are in primary Timing Advance Group (pTAG), and Cell 3 is in the secondary Timing Advance Group (sTAG). Cell 1, Cell 2 and Cell 3 have constant signal levels throughout the test. The UE is monitoring the PCell and PSCell. The UE shall be continuously scheduled in the PCell and PSCell throughout the whole test.

There are two sub tests in this section.

- For Test 1 (valid TA case), UE is provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment for sTAG.
- For Test 2 (invalid TA case), TimeAlignmentTimer of sTAG expires before UE receives the activation command

At the beginning of T1 the UE receives an RRC message by which the Cell 3 (PUCCH SCell) and Cell 4 (SCell) are configured on NR. The test equipment sends a single MAC message for activation of both Cell 3 and Cell 4 within 3s for UE power class 2/3/4 or 4s for UE power class 1 after RRM reports is sent for Cell 3.

The point in time at which the MAC message is received at the UE antenna connector, in a slot # denoted m, defines the start of time period T2. In the same MAC PDU, the test equipment activates the TCI state of RMC CORESET. In slot #m, the test equipment also sends an RRC message to configure the CSI-RS resources for both Cell 3 and Cell 4.

During T2, the UE shall be able to report valid CSI on PUCCH SCell for the activated PUCCH SCell at latest in

- slot m+ $T_{activate_total_PUCCH_SCell}$ as defined in clause 8.3.13.

During T2, the UE shall be able to report valid CSI on PCell for the activated SCell at latest in

- slot m+ $T_{activate_total_other_SCell.}$ as defined in clause 8.3.13.

Any PCell and PSCell interruption due to activation of PUCCH SCell shall occur in the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $m + 1 + T_{\text{activate_total_PUCCH_SCell}} + N_{\text{interruption}}$, as defined in clause 8.3, where $N_{\text{interruption}}$ is the interruption length given in clause 8.2.

Any PCell and PSCell interruption due to activation of SCell shall occur in the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $m + 1 + T_{\text{activate_total_other_SCell}} + N_{\text{interruption}}$, as defined in clause 8.3, where $N_{\text{interruption}}$ is the interruption length given in clause 8.2.

Time period T3 starts when a MAC message for deactivation of both Cell 3 and Cell 4, sent from the test equipment to the UE in a slot # denoted n, is received at the UE antenna connector. The UE shall carry out deactivation of the PUCCH SCell in a slot m + $\frac{\text{T}_{\text{HARQ}}+3ms}{NR\ slot\ length}$, as defined in clause 8.3, and the starting point of any PCell interruption due to the deactivation shall occur in the slot m + 1 + $\frac{\text{T}_{\text{HARQ}}}{NR\ slot\ length}$ to m + 1 + $\frac{\text{T}_{\text{HARQ}}+3\text{ms}}{NR\ slot\ length}$, as defined in clause 8.3.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell during activation and deactivation of PUCCH SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The test equipment verifies the deactivation time by counting the slots from the time when the SCell deactivation command is sent until CSI reporting for SCell is discontinued.

Table A.5.5.3.5.1-1: Supported test configurations

Configuration	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.5.5.3.5.1-2: General test parameters

Parameter	Unit	Value	Comment
RF Channel Number		1,2,3,4	One E-UTRAN radio channel (1) and three NR radio channels (2,3,4) are used for this test
Active PCell		Cell 1	Primary cell on E-UTRAN RF channel number 1. As specified in clause A.3.7.2.2
Active PSCell		Cell 2	Primary secondary cell on NR RF channel number 2 in FR1.
Configured deactivated PUCCH SCell		Cell 3	Configured deactivated secondary cell with PUCCH on NR RF channel number 3 in FR2
Configured deactivated SCells		Cell 4	Configured deactivated secondary cell on NR RF channel number 4 in FR2
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
SCell measurement cycle (measCycleSCell)	ms	160	For both Cell 3 and Cell 4
T1	s	7	During this time the PSCell shall be known and the SCells configured, PUCCH SCell detected but SCell not detected.
T2	s	1	During this time the UE shall activate both the SCells.
T3	s	1	During this time the UE shall deactivate the SCells.
T_{HARQ}	ms	k_1×NR slot length	k_1 is a number of slots indicated by the PDSCH-to-HARQ_feedback timing indicator field in a corresponding DCI format or provided by *dl-DataToUL-ACK* if the PDSCH-to-HARQ feedback timing field is not present in the DCI format, the value is defined in 38.213 [3]
k	slot	$k_1 + 3 \cdot N_{\text{slot}}^{\text{subframe},\,\mu} + 1$	As specified in clause 4.3 of TS 38.213 [3]

Table A. 5.5.3.5.1-3: Cell specific test parameters

Parameter		Unit	Cell 2			Cell 3			Cell 4		
			T1	T2	T3	T1	T2	T3	T1	T2	T3
SSB ARFCN			freq1			freq2			freq3		
Duplex mode	Config 1,2		TDD								
TDD configuration	Config 1,2		TDDConf.3.1								

$BW_{channel}$	Config 1,2	MHz	100: $N_{RB,c}$ = 66				
DL initial BWP configuration	Config 1,2		DLBWP.0.1				
DL dedicated BWP configuration	Config 1,2		DLBWP.1.1				
UL initial BWP configuration	Config 1,2		ULBWP.0.1				
UL dedicated BWP configuration	Config 1,2		ULBWP.1.1				
Timing offset to Cell 2		ms	Not Applicable	0		0	
PDSCH Reference measurement channel	Config 1,2		SR.3.1 TDD	SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET Reference Channel	Config 1,2		CR.3.1 TDD	CR.3.1 TDD		CR.3.1 TDD	
RMC CORESET Reference Channel	Config 1,2		CCR.3.1 TDD	CCR.3.1 TDD		CCR.3.1 TDD	
TRS configuration	Config 1,2		TRS.2.1 TDD	TRS.2.1 TDD		TRS.2.1 TDD	
CSI-RS configuration	Config 1,2		CSI-RS.3.1 TDD	N/A	CSI-RS.3.1 TDD	N/A	CSI-RS.3.1 TDD
CSI reporting periodicity	Config 1,2	ms	5	5		5	
OCNG Patterns			OP.1				
SMTC configuration			SMTC.1				
SSB configuration	Config 1,2		SSB.1 FR2	SSB.1 FR2		N/A	SSB.1 FR2
EPRE ratio of PSS to SSS		dB	0				
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
Propagation condition		-	AWGN				
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							

Table A.5.5.3.5.1-4: OTA related test parameters

Parameter[Note 6]	Unit	Cell 2 and 3			Cell 4		
		T1	T2	T3	T1	T2	T3
Angle of arrival configuration		Setup 1 according to A.3.15.1					
Assumption for UE beams[Note 7]		Rough			Rough		
N_{oc} [Note1]	dBm/15kHz[Note4]	-112			-112		
N_{oc} [Note1]	dBm/SCS[Note 3]	-102.97			-102.97		
$\hat{E}_s / N_{oc}$	dB	14			N/A	14	14

SS-RSRP Note2	dBm/SCS Note4	-88.97	N/A	-88.97	-88.97
$\hat{E}_s/I_{ot}$	dB	14	N/A	14	14
Io Note2	dBm/95.04 MHz Note4	-59.81	-73.98	-59.81	-59.81

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6: All parameters apply for configuration 1 and 2
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.5.5.3.5.2 Test Requirements

During T2 the UE shall start sending CSI reports for Cell 3 with non-zero CQI index in the configured slots for CSI reporting no later than slot m+ $T_{activate_total_PUCCH_SCell}$, as defined in clause 8.3.

During T2 the UE shall start sending CSI reports for Cell 4 with non-zero CQI index in the configured slots for CSI reporting no later than slot m+ $T_{activate_total_other_SCell}$, as defined in clause 8.3.

During T3 the UE shall stop sending CSI reports for both SCells no later than slot n + $\frac{T_{HARQ}+3ms}{NR\ slot\ length}$, as defined in clause 8.3.

During T2 interruption of PCell and PSCell during PUCCH SCell activation shall not happen outside the slot m + 1 + $\frac{T_{HARQ}}{\text{NR slot length}}$ to $m + 1 + T_{activate_total_PUCCH_SCell} + N_{interruption}$, as defined in clause 8.3.

During T2 interruption of PCell and PSCell during SCell activation shall not happen outside the slot $m + 1 +$ $\frac{T_{HARQ}}{\text{NR slot length}}$ to $m + 1 + T_{activate_total_other_SCell} + N_{interruption}$, as defined in clause 8.3.

During T3 the starting point of interruption of PCell and PSCell during the deactivation of PUCCH SCell and SCell shall not happen outside the slot n + 1 + $\frac{T_{HARQ}}{NR\ slot\ length}$ to n + 1 + $\frac{T_{HARQ}+3ms}{NR\ slot\ length}$, as defined in clause 8.3.

The interruption on any activated serving cell shall not be more than the summation of interruption length due to PUCCH SCell activation/deactivatoin and interruption length due to SCell activation/deactivatoin, the values of interruption length are specified for EN-DC in clause 8.2.

All of the above test requirements shall be fulfilled in order for the observed SCells activation delay to be counted as correct. The rate of correct observed SCells activation delay and SCells deactivation delay during repeated tests shall be at least 90%.

NOTE: During T2 if there are no uplink resources for reporting the valid CSI for PUCCH SCell in a slot m+ $T_{activate_total_PUCCH_SCell}$ as defined in clause 8.3 then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

NOTE: During T2 if there are no uplink resources for reporting the valid CSI for SCell in a slot m+ $T_{activate_total_other_SCell}$ as defined in clause 8.3 then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

A.5.5.3.6 SCell Activation and deactivation of unknown PUCCH SCell and unknown DL SCell in FR2 in non-DRX

A.5.5.3.6.1 Test Purpose and Environment

The purpose of this test is to verify that the PUCCH SCell and DL SCell activation and deactivation times are within the requirements stated in clause 8.3.13, when the PUCCH SCell in FR2 and DL SCell in FR2 is unknown to the UE at the time of activation.

The supported test configurations are shown in table A.5.5.3.6.1-1 below. The test parameters are given in Tables A.5.5.3.6.1-2 and cell-specific parameters in A.5.5.3.6.1-3 below. OTA related test parameters are shown in table A.5.5.3.6.1-4.

The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are four carriers, each with one cell and three NR cells. Before the test starts the UE is connected to Cell 1(PCell) on the E-UTRA carrier and Cell 2 (PSCell) on the NR carrier in FR1, but is not aware of Cell3 (PUCCH SCell1) and Cell4(DL SCell2) on the NR carriers both in FR2. The UE is monitoring the PCell and PSCell. The UE shall be continuously scheduled in the PCell and PSCell throughout the whole test. SCC of Cell 3 and SCC of Cell 4 are on a same band.

At the beginning of T1 the UE receives an RRC message by which the PUCCH SCell (Cell 3) and DL SCell (Cell 4) becomes configured on NR. The test equipment sends a single MAC message for activation of both SCells within 3s for UE power class 2/3/4 or 4s for UE power class 1 after RRM reports is sent for SCell1.

The point in time at which the MAC message is received at the UE antenna connector, in a slot # denoted m, defines the start of time period T2. In the same MAC PDU, the test equipment activates the TCI state of RMC CORESET. In slot #m, the test equipment also sends an RRC message to configure the CSI-RS resources for SCell1 and SCell2.

Time period T3 starts when a MAC message for deactivation of SCell, sent from the test equipment to the UE in a slot # denoted n, is received at the UE antenna connector.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The test equipment verifies the deactivation time by counting the slots from the time when the SCell deactivation command is sent until CSI reporting for SCell is discontinued.

Table A.5.5.3.6.1-1: Supported test configurations

Configuration	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.5.5.3.6.1-2: General test parameters

Parameter	Unit	Value	Comment
RF Channel Number		1,2,3,4	One E-UTRAN radio channel (1) and three NR radio channels (2,3,4) are used for this test
Active PCell		Cell 1	Primary cell on E-UTRAN RF channel number 1. As specified in clause A.3.7.2.2
Active PSCell		Cell 2	Primary secondary cell on NR RF channel number 2 in FR1.
Configured deactivated SCells		Cell 3 (PUCCH SCell 1), Cell 4(DL SCell 2)	Configured deactivated secondary cell on NR RF channel number 3 and RF channel number 4, both in FR2

CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
SCell measurement cycle (measCycleSCell)	ms	160	For both Cell 3 and Cell 4
TimeAlignmentTimer	ms	1280	Cell 1 and Cell 2 in pTAG.
TimeAlignmentTimerSTAG	ms	1280	Cell 3 and Cell 4 in sTAG
T1	s	7	During this time the PSCell shall be known and the SCells configured, SCell1 detected but SCell2 not detected.
T2	s	TBD	During this time the UE shall activate the SCell.
T3	s	1	During this time the UE shall deactivate the SCell.
T_{HARQ}	ms	k_1×NR slot length	k_1 is a number of slots indicated by the PDSCH-to-HARQ_feedback timing indicator field in a corresponding DCI format or provided by *dl-DataToUL-ACK* if the PDSCH-to-HARQ feedback timing field is not present in the DCI format, the value is defined in 38.213 [3]
k	slot	$k_1 + 3 \cdot N_{\text{slot}}^{\text{subframe},\,\mu} + 1$	As specified in clause 4.3 of TS 38.213 [3]

Table A.5.5.3.6.1-3: Cell specific test parameters

Parameter		Unit	Cell 2			Cell 3			Cell 4		
			T1	T2	T3	T1	T2	T3	T1	T2	T3
SSB ARFCN			**freq1**			**freq2**			**freq3**		
Duplex mode	Config 1,2		TDD								
TDD configuration	Config 1,2		TDDConf.3.1								
$BW_{channel}$	Config 1,2	MHz	100: $N_{RB,c}$ = 66								
DL initial BWP configuration	Config 1,2		DLBWP.0.1								
DL dedicated BWP configuration	Config 1,2		DLBWP.1.1								
UL initial BWP configuration	Config 1,2		ULBWP.0.1								
UL dedicated BWP configuration	Config 1,2		ULBWP.1.1								
Timing offset to Cell 2		ms	Not Applicable			0			0		
PDSCH Reference measurement channel	Config 1,2		SR.3.1 TDD			SR.3.1 TDD			SR.3.1 TDD		
RMSI CORESET Reference Channel	Config 1,2		CR.3.1 TDD			CR.3.1 TDD			CR.3.1 TDD		
RMC CORESET Reference Channel	Config 1,2		CCR.3.1 TDD			CCR.3.1 TDD			CCR.3.1 TDD		
TRS configuration	Config 1,2		TRS.2.1 TDD			TRS.2.1 TDD			TRS.2.1 TDD		
CSI-RS configuration	Config 1,2		CSI-RS.3.1 TDD			N/A	CSI-RS.3.1 TDD		N/A	CSI-RS.3.1 TDD	

CSI reporting periodicity	Config 1,2	ms	5	5	5	
OCNG Patterns			OP.1			
SMTC configuration			SMTC.1			
SSB configuration	Config 1,2		SSB.1 FR2	SSB.1 FR2	N/A	SSB.1 FR2
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
Propagation condition		-	AWGN			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						

Table A.5.5.3.6.1-4: OTA related test parameters

Parameter[Note 6]	Unit	Cell 2			Cell 3			Cell 4		
		T1	T2	T3	T1	T2	T3	T1	T2	T3
Angle of arrival configuration		NA			Setup 1 according to A.3.15.1					
Assumption for UE beams[Note 7]		NA			Rough			Rough		
N_{oc} [Note1]	dBm/15kHz[Note4]	Link only, see clause A.3.7A			-112			-112		
N_{oc} [Note1]	dBm/SCS[Note3]				-102.97			-102.97		
$\hat{E}_s / N_{oc}$	dB				-∞	14	14	-∞	14	14
SS-RSRP[Note2]	dBm/SCS [Note4]				-∞	-88.97	-88.97	-∞	-88.97	-88.97
$\hat{E}_s / I_{ot}$	dB				-∞	14	14	-∞	14	14
Io[Note2]	dBm/95.04 MHz [Note4]				-73.98	-59.81	-59.81	-73.98	-59.81	-59.81

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6: All parameters apply for configuration 1 and 2
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.5.5.3.6.2 Test Requirements

During T2 the UE shall send the first CSI report for SCell in the first available uplink resource after slot (m+k). UE is allowed to postpone CSI report to next available UL resource if an available uplink resource is subject to interruption. Whether CSI report in a slot was interrupted is checked by monitoring ACK/NACK sent in PSCell in the slot.

During T2 the UE shall start sending CSI reports for SCell1 with non-zero CQI index in the configured slots for CSI reporting no later than slot m + $\frac{T_{HARQ}+T_{delay_multiple_SCells_PUCCH_SCell}}{NR\ slot\ length}$, where

T_{HARQ} is defined in Table A.5.5.3.x6.1-2

$T_{delay_multiple_SCells_PUCCH_SCell}$ is defined in section 8.13.13.1. In this test case, both valid TA and invalid TA cases shall be tested.

Test for case when UE has valid TA: the *TimeAlignmentTimer* [2] associated with the TAG containing the PUCCH SCell is running, and $T_{delay_multiple_SCells_PUCCH_SCell} = T_{activation_time_multiple_scells} + [X]*T_{target_PL_RS} + T_{CSI_Reporting}$.

Test for case when UE do not have valid TA: $T_{delay_multiple_SCells_PUCCH_SCell} = T_{activation_time_multiple_scells} + \max((T_{First_available_CSI} + T_{CSI_processing}), [X]*T_{target_PL_RS}, (T1+T2+T3)) + T_{CSI_reporting_after}$

$T_{activation_time_multiple_scells}$ is the target SCell activation delay in millisecond in multiple SCell activation scenario as specified in section 8.3.7

$T_{CSI_Reporting}$ = 10ms

- NR slot length is 0.125ms.

During T2 the UE shall start sending CSI reports for SCell2 with non-zero CQI index in the configured slots for CSI reporting no later than slot m + $\frac{T_{HARQ}+T_{delay_multiple_SCells_other_SCell}}{NR\ slot\ length}$where

T_{HARQ} is defined in Table A.5.5.3.x6.1-2

$T_{delay_multiple_SCells_other_SCell} = T_{activation_time_multiple_scells} + T_{CSI_Reporting}$.

- $T_{activation_time_multiple_scells}$ is the target SCell activation delay in millisecond in multiple SCell activation scenario as specified in section 8.3.7

$T_{CSI_Reporting}$ = 10ms

NR slot length is 0.125ms.

During T3 the UE shall stop sending CSI reports for both SCells no later than slot n + $\frac{T_{HARQ}+3ms}{NR\ slot\ length}$, as defined in clause 8.3.14.

All of the above test requirements shall be fulfilled in order for the observed SCell activation delay to be counted as correct. The rate of correct observed SCell activation delay and SCell deactivation delay during repeated tests shall be at least 90%.

NOTE: During T2 if there are no uplink resources for reporting the valid CSI in a slot m + $\frac{T_{HARQ}+T_{delay_multiple_SCells_PUCCH_SCell}}{NR\ slot\ length}$, as defined in clause 8.3.13 then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

A.5.4 Timing

A.5.4.1 UE transmit timing

A.5.4.1.1 NR UE Transmit Timing Test for FR2

A.5.4.1.1.1 Test Purpose and environment

The purpose of this test is to verify that the UE can follow frame timing change of the connected gNodeb and that the UE initial transmit timing accuracy, maximum amount of timing change in one adjustment, minimum and maximum adjustment rate are within the specified limits. This test will verify the requirements in clause 7.1.2.

Supported test configurations are shown in Table 5.4.1.1.1-1.

Table A.5.4.1.1.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
1	LTE FDD, NR TDD, SSB SCS 240 kHz, data SCS 120 kHz, BW 100 MHz
2	LTE TDD, NR TDD, SSB SCS 240 kHz, data SCS 120 kHz, BW 100 MHz

The test consists of E-UTRA PCell and NR PSCell. The configuration for E-UTRA is given in A.3.7.2.1. Tables A.5.4.1.1.1-2 and A.5.4.1.1.1-2A define the parameters to be configured and strength of the transmitted signals. The transmit timing is verified by the UE transmitting SRS using the configuration defined in Table A.5.4.1.1.1-3.

Table A.5.4.1.1.1-2: Cell Specific Test Parameters for UL Transmit Timing test

Parameter	Unit	Config	Test1	Test2	Band Group
SSB ARFCN		1,2	Freq1	Freq1	
Duplex Mode		1,2	TDD		
TDD configuration		1,2	TDDConf.3.1		
$BW_{channel}$	MHz	1,2	100: $N_{RB,c}$ = 66		
Data RBs allocated		1,2	66		
Initial BWP Configuration		1,2	DLBWP.0.1 ULBWP.0.1		
Dedicated BWP Configuration		1,2	DLBWP.1.1 ULBWP.1.1		
TRS Configuration		1,2	TRS.2.1 TDD		
PDSCH/PDCCH TCI state		1,2	TCI.State.2		
DRx Cycle	ms	1,2	N/A	DRX.8[Note5]	
PDSCH Reference measurement channel		1,2	SR.3. 3 TDD		
RMSI CORESET Reference Channel		1,2	CR.3. 2 TDD		
Dedicated CORESET Reference Channel		1,2	CCR.3.7 TDD		
OCNG Patterns		1,2	O P. 1		
SSB Configuration		1,2	SSB.4 FR2		
SMTC Configuration		1,2	SMTC.1		
PDSCH/PDCCH subcarrier spacing	kHz	1,2	120		
EPRE ratio of PSS to SSS	dB	1,2	0	0	
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					

EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
Propagation condition		1,2	AWGN		
SRS Config		1,2	SRSConf.1[Note6]	SRSConf.2[Note6]	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Void Note 3: VoidNote 4: Void Note 5: DRx related parameters are given in Table A.3.3.8-1 Note 6: SRS configs are given in Table A.5.4.1.1.1-3					

Table A.5.4.1.1.1-2A: OTA related test parameters

Parameter	Unit	Test 1	Test 2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1	
Assumption for UE beams[Note 6]		Fine	
N_{oc} [Note1]	dBm/15kHz[Note4]	-112	
N_{oc} [Note1]	dBm/SCS[Note3]	-100	
$\hat{E}_s / N_{oc}$	dB	4	
SSB_RP[Note2]	dBm/SCS [Note4]	-99	
$\hat{E}_s / I_{ot}$	dB	4	
Io[Note2]	dBm/95.04 MHz [Note4]	-68.5	
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: Void Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation			

Table A.5.4.1.1.1-3: SRS Configuration for Timing Accuracy Test

	Field	SRSConf.1	SRSConf.2	Comments
SRS-ResourceSet	srs-ResourceSetId	0	0	
	srs-ResourceIdList	0	0	
	resourceType	Periodic	Periodic	
	Usage	Codebook	Codebook	

SRS-Resource	SRS-ResourceId	0	0	
	nrofSRS-Ports	Port1	Port1	
	transmissionComb	n2	n2	
	combOffset-n2	0	0	
	cyclicShift-n2	0	0	
	resourceMapping startPosition	0	0	
	resourceMapping nrofSymbols	n1	n1	
	resourceMapping repetitionFactor	n1	n1	
	freqDomainPosition	0	0	
	freqDomainShift	0	0	
	freqHopping c-SRS	17	17	Matches $N_{RB,c}$
	freqHopping b-SRS	0	0	
	freqHopping b-hop	0	0	
	groupOrSequenceHopping	Neither	Neither	
	resourceType	Periodic	Periodic	
	periodicityAndOffset-p	sl1,0	sl2560,4	Offset to align with DRx periodicity
	sequenceId	0	0	Any 10 bit number

Table A.5.4.1.1.1-4: Void

A.5.4.1.1.2 Test requirements

The test sequence shall be carried out in RRC_CONNECTED for every test case.

Following will be the test sequence for this test

1) Set up E-UTRA PCell according to parameters given in Table A.3.7.2.2-1 and setup NR PSCell according to parameters given in Table A.5.4.1.1.1-1.

2) After connection set up with the cell, the test equipment will verify that the timing of the NR cell is within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first detected path of DL SSB.

   a. The N_{TA} offset value (in T_c units) is 13792

   b. The T_e values depend on the DL and UL SCS for which the test is being run and are given in Table 7.1.2-1

3) The test system shall adjust the timing of the DL path by values given in Table A.5.4.1.1.2-1

Table A.5.4.1.1.2-1 Adjustment Value for DL Timing

SCS of SSB signals (kHz)	Adjustment Value	
	Test1	Test2
240	$+8*64T_c$	$+4*64T_c$

4) The test system shall verify that the adjustment step size and the adjustment rate shall be according to requirements specified in Clause 7.1.2 Table 7.1.2.1-1 until the UE transmit timing offset is within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ respective to the first path (in time) of DL SSB used by the UE to determine downlink timing is received from the reference cell at the UE antenna. Skip this step for test 2 with DRX configured.

5) The test system shall verify that the UE transmit timing offset stays within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first path (in time) of DL SSB used by the UE to determine downlink timing is received from the reference cell at the UE antenna. For Test 2 the UE transmit timing offset shall be verified for the first transmission in the DRX cycle immediately after DL timing adjustment

A.5.4.2 UE timer accuracy

A.5.4.3 Timing advance

A.5.4.3.1 EN-DC FR2 timing advance adjustment accuracy

A.5.4.3.1.1 Test Purpose and Environment

The purpose of the test is to verify UE Timing Advance adjustment delay and accuracy requirement defined in clause 7.3.

A.5.4.3.1.2 Test Parameters

Supported test configurations are shown in table A.5.4.3.1.2-1. Both timing advance adjustment delay and accuracy are tested by using the parameters in table A.5.4.3.1.2-2, A.5.4.3.1.2-3, A.5.4.3.1.2-3A and A.5.4.3.1.2-4. The configuration of Cell 1 (LTE PCell) is specified in clause A.3.7.2.1.

In all test cases, two cells are used. Cell 1 is the PCell in the primary Timing Advance Group (pTAG) and cell 2 is the PSCell is in the secondary Timing Advance Group (sTAG). Each test consists of two successive time periods, with time duration of T1 and T2 respectively. In each time period, timing advance commands for sTAG are sent to the UE and Sounding Reference Signals (SRS), as specified in table A.5.4.3.1.2-3, are sent from the UE and received by the test equipment. By measuring the reception of the SRS, the transmit timing, and hence the timing advance adjustment accuracy, can be measured for PSCell in sTAG.

During time period T1, the test equipment shall send one message with a Timing Advance Command MAC Control Element for sTAG, as specified in clause 6.1.3.4 in TS 38.321 [7]. The Timing Advance Command value shall be set to 31, which according to clause 4.2 in TS 38.213 [3] results in zero adjustment of the Timing Advance. In this way, a reference value for the timing advance for sTAG used by the UE is established.

During time period T2, the test equipment shall send a sequence of messages with Timing Advance Command MAC Control Elements for sTAG, with Timing Advance Command value specified in table A.5.4.3.1.2-2. This value shall result in changes of the timing advance for sTAG used by the UE, and the accuracy of the change shall then be measured, using the SRS sent from the UE.

As specified in clause 7.3.2.1, the UE adjusts its uplink timing at slot n+k for a timing advance command received in slot n. This delay must be taken into account when measuring the timing advance adjustment accuracy, via the SRS sent from the UE.

The UE Time Alignment Timer, described in clause 5.2 in TS 38.321, shall be configured so that it does not expire in the duration of the test.

Table A.5.4.3.1.2-1: Timing advance supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.5.4.3.1.2-2: General test parameters for timing advance

Parameter	Unit	Value	Comment

RF channel number		Cell 1: 1 Cell 2: 2	1 for E-UTRAN PCell 2 for NR PSCell
Initial DL BWP		DLBWP.0.1	As specified in Table A.3.9.2.1-1
Dedicated DL BWP		DLBWP.1.1	As specified in Table A.3.9.2.2-1
Initial UL BWP		ULBWP.0.1	As specified in Table A.3.9.3.1-1
Dedicated UL BWP		ULBWP.1.1	As specified in Table A.3.9.3.2-1
Timing Advance Command (T_A) value during T1		31	$N_{TA_new} = N_{TA_old}$ for the purpose of establishing a reference value from which the timing advance adjustment accuracy can be measured during T2
Timing Advance Command (T_A) value during T2		39	*For 120 kHz SCS* $N_{TA_new} = N_{TA_old} + 1024*T_c$ (based on equation in clause 4.2 of TS 38.213 [3])
T1	s	5	
T2	s	5	

Table A.5.4.3.1.2-3: Cell specific test parameters for timing advance

Parameter	Unit	Test1	
		T1	T2
Duplex mode		TDD	
TDD configuration		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66	
BWP BW	MHz	100: $N_{RB,c}$ = 66	
DRx Cycle	ms	Not Applicable	
PDSCH Reference measurement channel		SR.3.1 TDD	
RMSI CORESET Reference Channel		CR.3.1 TDD	
Dedicated CORESET Reference Channel		CCR.3.1 TDD	
TRS configuration		TRS.2.1 TDD	
PDSCH/PDCCH TCI state		TCI.State.2	
OCNG Patterns		OCNG pattern 1	
SMTC configuration		SMTC.1 FR2	
SSB configuration		SSB.3 FR2	
PDSCH/PDCCH subcarrier spacing	kHz	120 kHz	
PUCCH/PUSCH subcarrier spacing	kHz	120 kHz	
EPRE ratio of PSS to SSS	dB	0	
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
Propagation condition	-	AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.5.4.3.1.2-3A: OTA related test parameters

Parameter	Unit	Test 1	
		T1	T2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1	
Assumption for UE beams[Note 6]		Fine	

N_{oc} Note1	dBm/15kHz Note4	-112
N_{oc} Note1	dBm/SCS Note3	-103
$\hat{E}_s / N_{oc}$	dB	4
SS-RSRP Note2	dBm/SCS Note4	-99
$\hat{E}_s / I_{ot}$	dB	4
Io Note2	dBm/95.04 MHz Note4	-68.5
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.		
Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.		
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.		
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone		
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone		
Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation		

Table A.5.4.3.1.2-4: Sounding Reference Symbol Configuration for timing advance

Field	Value	Comment
c-SRS	16	Frequency hopping is disabled
b-SRS	0	
b-hop	0	
freqDomainPosition	0	Frequency domain position of SRS
freqDomainShift	0	
groupOrSequenceHopping	neither	No group or sequence hopping
SRS-PeriodicityAndOffset	sl5=4	Once every 5 slots
pathlossReferenceRS	ssb-Index=0	SSB #0 is used for SRS path loss estimation
usage	Codebook	Codebook based UL transmission
startPosition	0	resourceMapping setting. SRS on last symbol of slot, and 1symbols for SRS without repetition.
nrofSymbols	n1	
repetitionFactor	n1	
combOffset-n2	0	transmissionComb setting
cyclicShift-n2	0	
nrofSRS-Ports	port1	Number of antenna ports used for SRS transmission
Note: For further information see clause 6.3.2 in TS 38.331 [2].		

A.5.4.3.1.3 Test Requirements

The UE shall apply the signalled Timing Advance value for PSCell in sTAG to the transmission timing at the designated activation time i.e. *k+1* slots after the reception of the timing advance command, where $k = 11$.

The Timing Advance adjustment accuracy for PSCell in sTAG shall be within the limits specified in clause 7.3.2.2.

The rate of correct Timing Advance adjustments observed during repeated tests shall be at least 90%.

A.5.5 Signaling characteristics

A.5.5.1 Radio link Monitoring

In the following clause, any uplink signal transmitted by the UE is used for detecting the In-/Out-of-Sync state of the UE. In terms of measurement, the uplink signal is verified on the basis of the UE output power:

Editor note: The metric for the detection of the UE UL transmitted signal by the TE is FFS.

A.5.5.1.1 Radio Link Monitoring Out-of-sync Test for FR2 PSCell configured with SSB-based RLM RS in non-DRX mode

A.5.5.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PSCell. This test will partly verify the FR2 radio link monitoring requirements in clause 8.1.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to '*rlf*'. Supported test configurations are shown in table A.5.5.1.1.1-1. The test parameters are given in Tables A.5.5.1.1.1-2, A.5.5.1.1.1-3, and A. 5.5.1.1.1-4 below. There are two cells, Cell 1 is the E-UTRAN PCell, and Cell 2 is the PSCell, in the test. The E-UTRAN PCell setting refers to Table A.3.7.2.1-2. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.5.5.1.1.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states, and Figure A.5.5.1.1.1-2 shows the Time multiplexed downlink transmissions from each Angle of Arrival. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and Cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. UE is configured to perform inter-frequency measurements using Gap Pattern ID #0 (40ms) in test 1.

Table A.5.5.1.1.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
1	FDD LTE PCell, NR 120 KHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	TDD LTE PCell, NR 120 KHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR2	

Table A.5.5.1.1.1-2: General test parameters for FR2 out-of-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active E-UTRA PCell			Cell 1
E-UTRA RF Channel Number			1
Active PSCell			Cell 2
RF Channel Number			2
Duplex mode	Config 1, 2		TDD
$BW_{channel}$	Config 1, 2		100: $N_{RB,c}$ = 66
Data RBs allocated	Config 1, 2		24
DL initial BWP configuration	Config 1, 2		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2		DLBWP.1.1
UL initial BWP configuration	Config 1, 2		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2		ULBWP.1.1
TDD Configuration	Config 1, 2		TDDConf.3.1

RMSI CORESET Reference Channel	Config 1, 2		CR.3.1 TDD
Dedicated CORESET Reference Channel	Config 1, 2		CCR.3.4 TDD
SSB Configuration	Config 1, 2		SSB.1 FR2
SMTC Configuration	Config 1, 2		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2		120 KHz
PRACH Configuration	Config 1, 2		Table A.3.8.3.1
SSB index assigned as RLM RS	Config 1, 2		0,1
OCNG parameters			OP.5
CP length			Normal
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			*OFF*
Gap pattern ID			*gp0*
Layer 3 filtering			*Enabled*
T310 timer		ms	*0*
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1, 2		CSI-RS.3.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
TCI states for PDCCH/PDSCH			TCI.State.2
CSI-RS for tracking	Config 1, 2		TRS.2.1 TDD
T1		s	0.2
T2		s	9.68
T3		s	9.68
D1		s	9.64
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts. Note 3: E-UTRAN is in non-DRX mode under test.			

Table A.5.5.1.1.1-3: OTA related cell specific test parameters for FR2 (Cell 2) for out-of-sync radio link monitoring tests in non-DRX mode

Parameter	Unit	Test 1					
		T1	T2	T3	T1	T2	T3
AoA setup		Setup 3 defined in A.3.15					
		AoA1			AoA2		
Assumption for UE beams[Note 5]		Rough			Rough		
EPRE ratio of PDCCH DMRS to SSS	dB	4					
EPRE ratio of PDCCH to PDCCH DMRS	dB						
EPRE ratio of PBCH DMRS to SSS	dB						

EPRE ratio of PBCH to PBCH DMRS		dB	0			Not sent		
EPRE ratio of PSS to SSS		dB						
EPRE ratio of PDSCH DMRS to SSS		dB						
EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
ssb-Index 0 SNR	Config 1, 2	dB	$2^{Note 6}$	$-6^{Note 6}$	-15			
ssb-Index 1 SNR	Config 1, 2		Not sent			$2^{Note 6}$	-15	-15
N_{oc}	Config 1, 2	dBm/ 15kHz	-92.1			-92.1		
Time multiplexing of the downlink transmissions from each AoA			Defined in Figure A.5.5.1.1.1-2					
Propagation condition			TDL-A 30ns 75Hz			TDL-A 30ns 75Hz		
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG. Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs. Note 4: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6. Note 5: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation Note 6: This value allows up to 1dB degradation from applied SNR to UE baseband									

Table A.5.5.1.1.1-4: Measurement gap configuration for out-of-sync tests in non-DRX mode

Field	Test 1
	Value
gapOffset	0
Note 1: E-UTRAN PCell and PSCell are SFN-synchronous and frame boundary aligned. (Ensure that RLM RS is partially overlapped with measurement gap).	

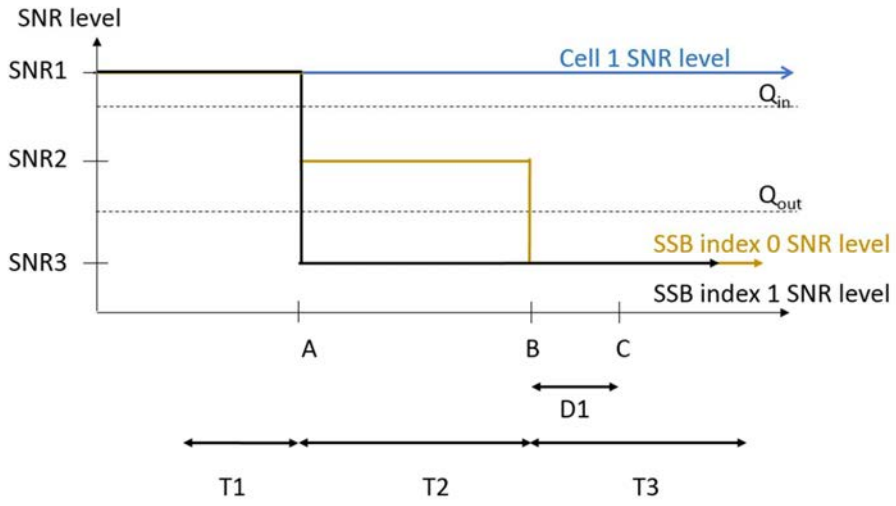

Figure A.5.5.1.1.1-1: SNR variation for out-of-sync testing

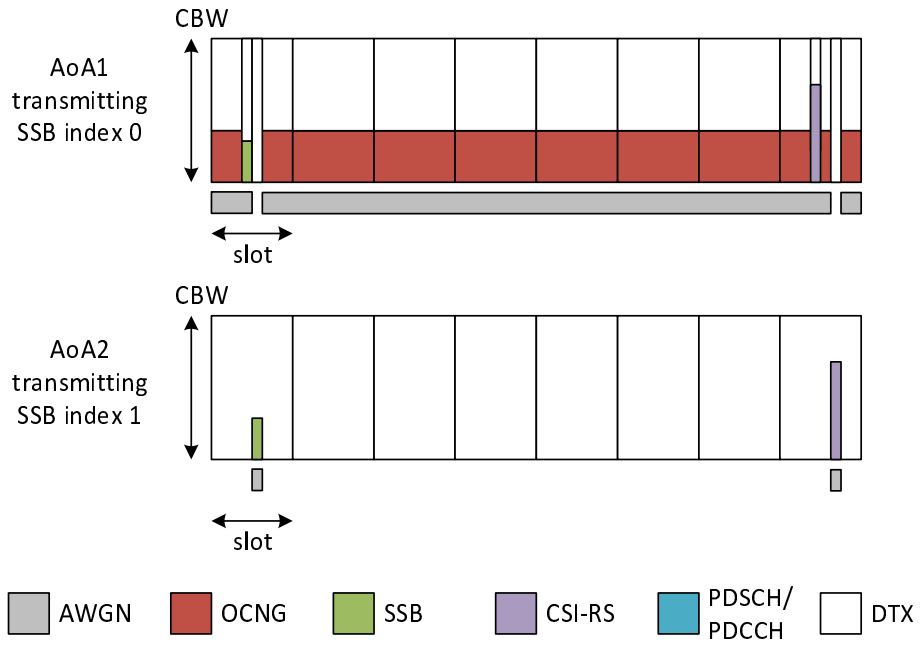

Figure A.5.5.1.1.1-2: Time multiplexed downlink transmissions

A.5.5.1.1.2 Test Requirements

The UE behavior in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal in Cell 2 no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.1.2 Radio Link Monitoring In-sync Test for FR2 PSCell configured with SSB-based RLM RS in non-DRX mode

A.5.5.1.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PSCell. This test will partly verify the FR2 radio link monitoring requirements in clause 8.1.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to '*rlf*'. Supported test configurations are shown in table A.5.5.1.2.1-1. The test parameters are given in Tables A.5.5.1.2.1-2, and A.5.5.1.2.1-3 below. There are two cells, Cell 1 is the E-UTRAN PCell, and Cell 2 is the PSCell, in the test. The E-UTRAN PCell setting refers to Table A.3.7.2.1-2. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.5.5.1.2.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states, and Figure A.5.5.1.2.1-2 shows the Time multiplexed downlink transmissions from each Angle of Arrival. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and Cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms.

Table A.5.5.1.2.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
1	FDD LTE PCell, NR 120 KHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	TDD LTE PCell, NR 120 KHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR2	

Table A.5.5.1.2.1-2: General test parameters for FR2 in-sync testing in non-DRX mode

Parameter			Unit	Value
				Test 1
Active E-UTRA PCell				Cell 1
E-UTRA RF Channel Number				1
Active PSCell				Cell 2
RF Channel Number				2
Duplex mode		Config 1, 2		TDD
$BW_{channel}$		Config 1, 2		100: $N_{RB,c}$ = 66
Data RBs allocated		Config 1, 2		24
DL initial BWP configuration		Config 1, 2		DLBWP.0.1
DL dedicated BWP configuration		Config 1, 2		DLBWP.1.1
UL initial BWP configuration		Config 1, 2		ULBWP.0.1
UL dedicated BWP configuration		Config 1, 2		ULBWP.1.1
TDD Configuration		Config 1, 2		TDDConf.3.1
RMSI CORESET Reference Channel		Config 1, 2		CR.3.1 TDD
Dedicated CORESET Reference Channel		Config 1, 2		CCR.3.1 TDD
SSB Configuration		Config 1, 2		SSB.1 FR2
SMTC Configuration		Config 1, 2		SMTC.3
PDSCH/PDCCH subcarrier spacing		Config 1, 2		120 KHz
PRACH Configuration		Config 1, 2		Table A.3.8.3.1
SSB index assigned as RLM RS		Config 1, 2		0,1
OCNG parameters				OP.5
CP length				Normal
In sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	4
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	0
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
Out of sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	4
	DMRS precoder granularity			REG bundle size

	REG bundle size		6
DRX			*OFF*
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*
T310 timer		ms	4000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1, 2		CSI-RS.3.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
TCI states for PDCCH/PDSCH			TCI.State.2
CSI-RS for tracking	Config 1, 2		TRS.2.1 TDD
T1		s	0.2
T2		s	0.2
T3		s	1.88
T4		s	0.2
T5		s	3.84
D1		s	3.8
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts. Note 3: E-UTRAN is in non-DRX mode under test.			

Table A.5.5.1.2.1-3: OTA related cell specific test parameters for FR2 (Cell 2) for in-sync radio link monitoring tests in non-DRX mode

Parameter		Unit	Test 1									
			T1	T2	T3	T4	T5	T1	T2	T3	T4	T5
AoA setup			Setup 3 defined in A.3.15									
			AoA1					AoA2				
Assumption for UE beams[Note 5]			Rough					Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0					Not sent				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0									
EPRE ratio of PBCH DMRS to SSS		dB										
EPRE ratio of PBCH to PBCH DMRS		dB										
EPRE ratio of PSS to SSS		dB										
EPRE ratio of PDSCH DMRS to SSS		dB										
EPRE ratio of PDSCH to PDSCH DMRS		dB										
EPRE ratio of OCNG DMRS to SSS		dB										
EPRE ratio of OCNG to OCNG DMRS		dB										
ssb-Index 0 SNR	Config 1, 2	dB	2[Note 6]	-6[Note 6]	-15	-4.5	2[Note 6]					
ssb-Index 1 SNR	Config 1, 2		Not sent					2[Note 6]	-15	-15	-15	-15
N_{oc}	Config 1, 2	dBm/ 15KHz	-92.1					-92.1				

Time multiplexing of the downlink transmissions from each AoA		Defined in Figure A.5.5.1.2.1-2	
Propagation condition		TDL-A 30ns 75Hz	TDL-A 30ns 75Hz

Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 4: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6.
Note 5: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 6: This value allows up to 1dB degradation from applied SNR to UE baseband

Table A.5.5.1.2.1-4: Void

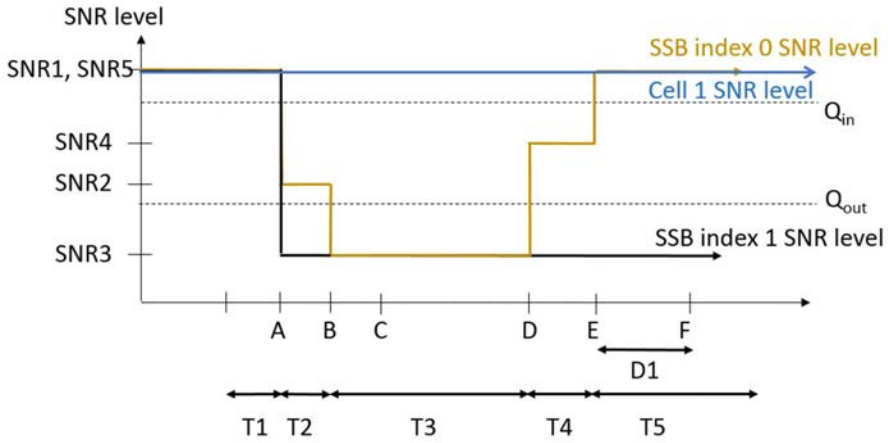

Figure A.5.5.1.2.1-1: SNR variation for in-sync testing

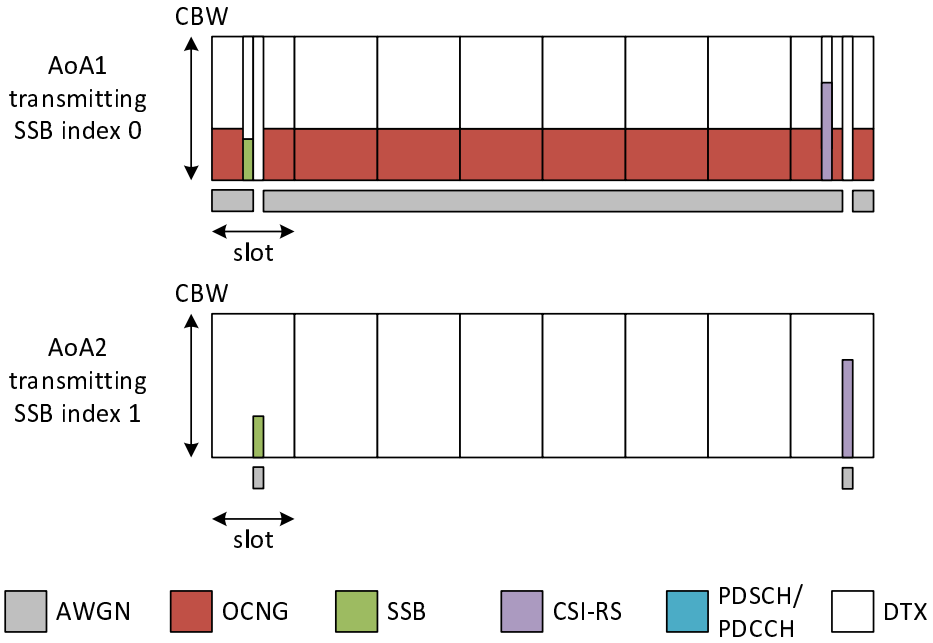

Figure A.5.5.1.2.1-2: Time multiplexed downlink transmissions

A.5.5.1.2.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.1.3 Radio Link Monitoring Out-of-sync Test for FR2 PSCell configured with SSB-based RLM RS in DRX mode

A.5.5.1.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PSCell when DRX is used. This test will partly verify the FR2 radio link monitoring requirements in clause 8.1.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to '*rlf*'. Supported test configurations are shown in table A.5.5.1.3.1-1. The test parameters are given in Tables A.5.5.1.3.1-2, and A.5.5.1.3.1-3. There are two cells, Cell 1 is the E-UTRAN PCell, and Cell 2 is the PSCell, in the test. The E-UTRAN PCell setting refers to Table A.3.7.2.1-2. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.5.5.1.3.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and Cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

Table A.5.5.1.3.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
1	FDD LTE PCell, NR 120 KHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	TDD LTE PCell, NR 120 KHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR2	

Table A.5.5.1.3.1-2: General test parameters for FR2 out-of-sync testing in DRX mode

Parameter			Unit	Value
				Test 1
Active E-UTRA PCell				Cell 1
E-UTRA RF Channel Number				1
Active PSCell				Cell 2
RF Channel Number				2
Duplex mode		Config 1, 2		TDD
$BW_{channel}$		Config 1, 2		100: $N_{RB,c}$ = 66
Data RBs allocated		Config 1, 2		66
DL initial BWP configuration		Config 1, 2		DLBWP.0.1
DL dedicated BWP configuration		Config 1, 2		DLBWP.1.1
UL initial BWP configuration		Config 1, 2		ULBWP.0.1
UL dedicated BWP configuration		Config 1, 2		ULBWP.1.1
TDD Configuration		Config 1, 2		TDDConf.3.1
RMSI CORESET Reference Channel		Config 1, 2		CR.3.1 TDD
Dedicated CORESET Reference Channel		Config 1, 2		CCR.3.4 TDD
SSB Configuration		Config 1, 2		SSB.1 FR2
SMTC Configuration		Config 1, 2		SMTC.1
PDSCH/PDCCH subcarrier spacing		Config 1, 2		120 KHz
PRACH Configuration		Config 1, 2		Table A.3.8.3.1
SSB index assigned as RLM RS		Config 1, 2		0,1
OCNG parameters				OP.1
CP length				Normal
Out of sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	4
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
DRX Configuration				DRX.3
Gap pattern ID				N.A.
Layer 3 filtering				*Enabled*
T310 timer			ms	*0*
T311 timer			ms	1000
N310				1
N311				1
CSI-RS for CSI reporting		Config 1, 2		CSI-RS.3.1 TDD
reportConfigType				periodic
reportQuantity				cri-RI-PMI-CQI

CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
TCI states for PDCCH/PDSCH			TCI.State.2
CSI-RS for tracking	Config 1, 2		TRS.2.1 TDD
T1		s	0.2
T2		s	14.48
T3		s	14.48
D1		s	14.44
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts. Note 3: E-UTRAN is in non-DRX mode under test.			

Table A.5.5.1.3.1-3: OTA related cell specific test parameters for FR2 (Cell 2) for out-of-sync radio link monitoring tests in DRX mode

Parameter		Unit	Test 1		
			T1	T2	T3
AoA setup			Setup 1 defined in A.3.15		
Assumption for UE beams[Note 5]			Rough		
EPRE ratio of PDCCH DMRS to SSS		dB	4		
EPRE ratio of PDCCH to PDCCH DMRS		dB	0		
EPRE ratio of PBCH DMRS to SSS		dB	0		
EPRE ratio of PBCH to PBCH DMRS		dB			
EPRE ratio of PSS to SSS		dB			
EPRE ratio of PDSCH DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
ssb-Index 0 SNR	Config 1, 2	dB	2[Note 6]	-6[Note 6]	-15
ssb-Index 1 SNR	Config 1, 2		2[Note 6]	-15	-15
N_{oc}	Config 1, 2	dBm/15K Hz	-104.7dBm		
Propagation condition			TDL-A 30ns 75Hz		
Note 1: OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG. Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs. Note 4: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6. Note 5: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation Note 6: This value allows up to 1dB degradation from applied SNR to UE baseband					

Table A.5.5.1.3.1-4: Void

Table A.5.5.1.3.1-5: Void

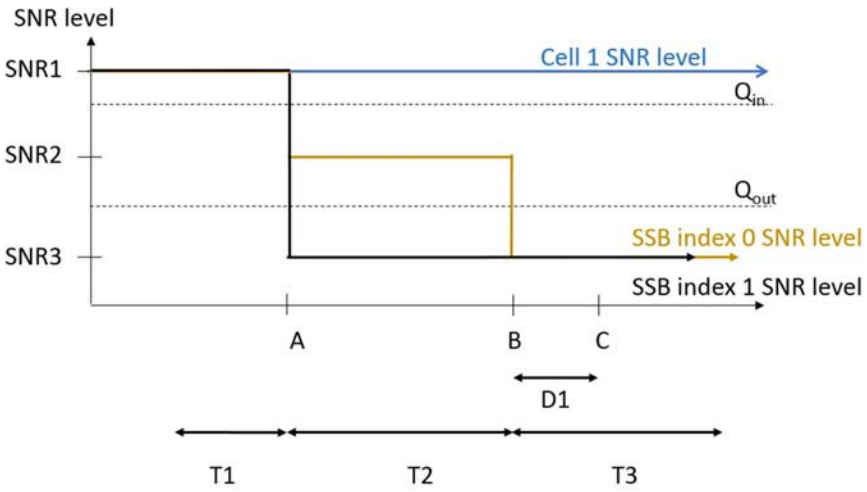

Figure A.5.5.1.3.1-1: SNR variation for out-of-sync testing

A.5.5.1.3.2 Test Requirements

The UE behavior in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal in Cell 2 no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.1.4 Radio Link Monitoring In-sync Test for FR2 PSCell configured with SSB-based RLM RS in DRX mode

A.5.5.1.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PSCell when DRX is used. This test will partly verify the FR2 radio link monitoring requirements in clause 8.1.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to '*rlf*'. Supported test configurations are shown in table A.5.5.1.4.1-1. The test parameters are given in Tables A.5.5.1.4.1-2, and A.5.5.1.4.1-3. There are two cells, Cell 1 is the E-UTRAN PCell, and Cell 2 is the PSCell, in the test. The E-UTRAN PCell setting refers to Table A.3.7.2.1-2. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.5.5.1.4.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and Cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

Table A.5.5.1.4.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
1	FDD LTE PCell, NR 120 KHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	TDD LTE PCell, NR 120 KHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR2	

Table A.5.5.1.4.1-2: General test parameters for FR2 in-sync testing in DRX mode

Parameter			Unit	Value
				Test 1
Active E-UTRA PCell				Cell 1
E-UTRA RF Channel Number				1
Active PSCell				Cell 2
RF Channel Number				2
Duplex mode		Config 1, 2		TDD
$BW_{channel}$		Config 1, 2		100: $N_{RB,c}$ = 66
Data RBs allocated		Config 1, 2		66
DL initial BWP configuration		Config 1, 2		DLBWP.0.1
DL dedicated BWP configuration		Config 1, 2		DLBWP.1.1
UL initial BWP configuration		Config 1, 2		ULBWP.0.1
UL dedicated BWP configuration		Config 1, 2		ULBWP.1.1
TDD Configuration		Config 1, 2		TDDConf.3.1
RMSI CORESET Reference Channel		Config 1, 2		CR.3.1 TDD
Dedicated CORESET Reference Channel		Config 1, 2		CCR.3.1 TDD
SSB Configuration		Config 1, 2		SSB.1 FR2
SMTC Configuration		Config 1, 2		SMTC.3
PDSCH/PDCCH subcarrier spacing		Config 1, 2		120 KHz
PRACH Configuration		Config 1, 2		Table A.3.8.3.1
SSB index assigned as RLM RS		Config 1, 2		0,1
OCNG parameters				OP.1
CP length				Normal
In sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	4
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	0
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
Out of sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	4

	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX Configuration			DRX.11
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*
T310 timer		ms	4000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1, 2		CSI-RS.3.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
TCI states for PDCCH/PDSCH			TCI.State.2
CSI-RS for tracking	Config 1, 2		TRS.2.1 TDD
T1		s	0.2
T2		s	0.2
T3		s	2.8
T4		s	0.2
T5		s	3.88
D1		s	3.84
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts. Note 3: E-UTRAN is in non-DRX mode under test.			

Table A.5.5.1.4.1-3: OTA related cell specific test parameters for FR2 (Cell 2) for in-sync radio link monitoring test in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
AoA setup			Setup 1 defined in A.3.15				
Assumption for UE beams[Note 5]			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0				
EPRE ratio of PBCH DMRS to SSS		dB	0				
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
ssb-Index 0 SNR	Config 1, 2	dB	$2^{Note 6}$	$-6^{Note 6}$	-15	-4.5	$2^{Note 6}$
ssb-Index 1 SNR	Config 1, 2		$2^{Note 6}$	-15	-15	-15	-15
N_{oc}	Config 1, 2	dBm/15KHz	-104.7dBm				
Propagation condition			TDL-A 30ns 75Hz				

Note 1:	OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.3
Note 3:	SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 4:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6.
Note 5:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 6:	This value allows up to 1dB degradation from applied SNR to UE baseband

Table A.5.5.1.4.1-4: Void

Table A.5.5.1.4.1-5: Void

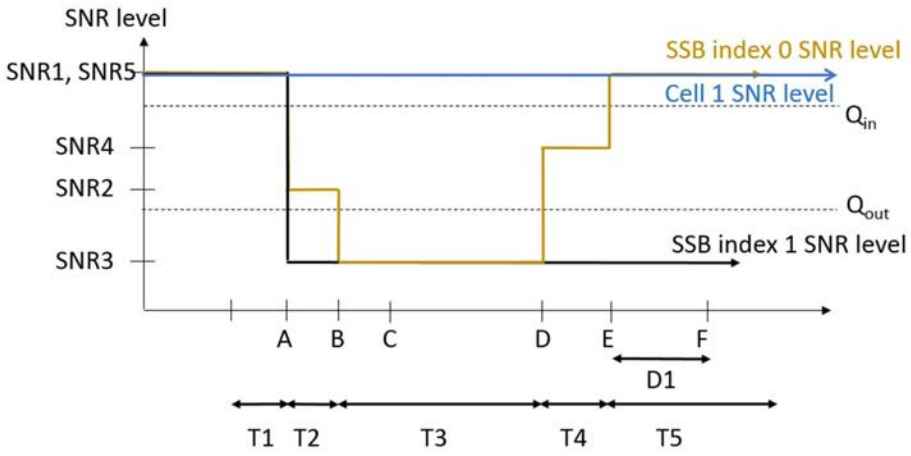

Figure A.5.5.1.4.1-1: SNR variation for in-sync testing.

A.5.5.1.4.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.1.5 EN-DC Radio Link Monitoring Out-of-sync Test for FR2 PSCell configured with CSI-RS-based RLM in non-DRX mode

A.5.5.1.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PSCell when no DRX is used. This test will partly verify the FR2 TDD PSCell CSI-RS Out-of-sync radio link monitoring requirements in clause 8.1.

The test parameters are given in Tables A.5.5.1.5.1-1, A.5.5.1.5.1-2, A.5.5.1.5.1-3 and A.5.5.1.5.1-3A below. There are two cells, cell 1 is the E-UTRAN PCell, and cell 2 is the PSCell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.5.5.1.5.1-1 shows the variation of the downlink SNR in the E-UTRAN PCell and the PSCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms). In the test, SSB0 and SSB1 are configured as BFD-RS.

Table A.5.5.1.5.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR2	

Table A.5.5.1.5.1-2: General test parameters for FR2 PSCell for CSI-RS out-of-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active E-UTRA PCell			Cell 1
E-UTRA RF Channel Number			1
Active PSCell			Cell 2
RF Channel Number			2
Duplex Mode			TDD
$BW_{channel}$	Config 1, 2		100: $N_{RB,c}$ = 66
Data RBs allocated	Config 1, 2		24
$BW_{occupied}$	Config 1, 2		24
TDD Configuration	Config 1		TDDConf.3.1
	Config 2		TDDConf.3.1
DL initial BWP configuration	Config 1, 2		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2		DLBWP.1.4
UL initial BWP configuration	Config 1, 2		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2		ULBWP.1.4
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD
	Config 2		CR.3.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.3.4 TDD CCR.3.6 TDD
	Config 2		CCR.3.4 TDD CCR.3.6 TDD

SSB Configuration	Config 1		SSB.1 FR2
	Config 2		SSB.1 FR2
SMTC Configuration	Config 1		SMTC.1
	Config 2		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1		120 KHz
	Config 2		120 KHz
CSI-RS for RLM	Config 1, 2		Resource #4 in TRS.2.1 TDD Resource #4 in TRS.2.2 TDD
TRS configuration			TRS.2.1 TDD TRS.2.2 TDD
TCI configuration for PDCCH#1/PDSCH			TCI.State.2
TCI configuration for PDCCH#2			TCI.State.3
OCNG parameters			OP.5
CP length			Normal
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			*OFF*
Gap pattern ID			*gp0*
Layer 3 filtering			*Enabled*
T310 timer		ms	*0*
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1		CSI-RS.3.1 TDD
	Config 2		CSI-RS.3.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
T1		s	0.2
T2		s	0.35
T3		s	0.35
D1		s	0.31
Note 1: UE-specific PDCCH is not transmitted after T1 starts. Note 2: E-UTRAN is in non-DRX mode under test.			

Table A.5.5.1.5.1-3: Cell specific test parameters for FR2 for CSI-RS out-of-sync radio link monitoring in non-DRX mode

Parameter	Unit	Test 1					
		T1	T2	T3	T1	T2	T3
AoA setup		Setup 3 defined in A.3.15					

			AoA1			AoA2		
Assumption for UE beams[Note 10]			Rough			Rough		
EPRE ratio of PDCCH DMRS to SSS		dB	4			Not sent		
EPRE ratio of PDCCH to PDCCH DMRS		dB	0					
EPRE ratio of PBCH DMRS to SSS		dB						
EPRE ratio of PBCH to PBCH DMRS		dB						
EPRE ratio of PSS to SSS		dB						
EPRE ratio of PDSCH DMRS to SSS		dB						
EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
SNR on RLM-RS1	Config 1, 2	dB	2[Note 11]	-6[Note 11]	-15			
SNR on RLM-RS2	Config 1, 2	dB	Not sent			2[Note 11]	-15	-15
N_{oc}	Config 1, 2	dBm/ 15kHz	-92.1			-92.1		
Propagation condition			TDL-A 30ns 75Hz			TDL-A 30ns 75Hz		

Note 1: OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.5.5.1.5.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6.
Note 10: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband

Table A.5.5.1.5.1-3A: Measurement gap configuration for FR2 CSI-RS out-of-sync radio link monitoring in non-DRX mode

Field	Test 1
	Value
gapOffset	0

Note 1: E-UTRAN PCell and PSCell are SFN-synchronous and frame boundary aligned. (Ensure that RLM RS is partially overlapped with measurement gap)

Table A.5.5.1.5.1-4: Void

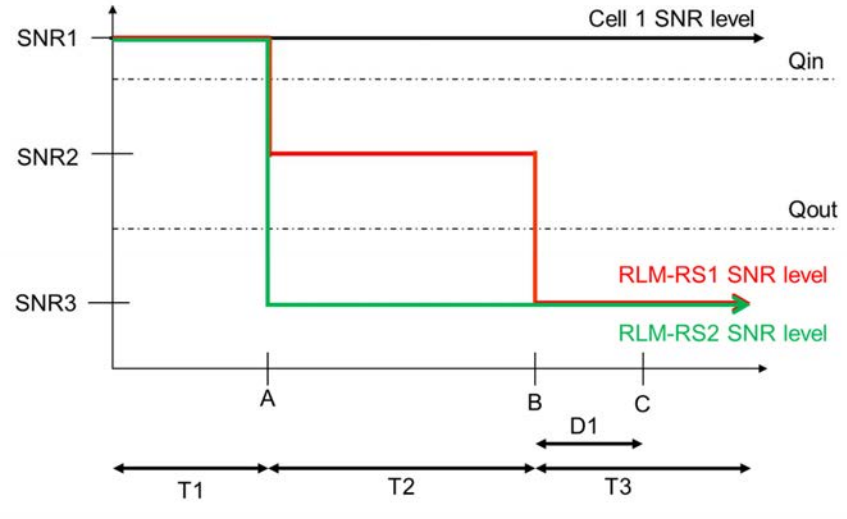

Figure A.5.5.1.5.1-1: SNR variation for CSI-RS out-of-sync testing

A.5.5.1.5.2 Test Requirements

The UE behaviour during time durations T1, T2, and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 2 (PSCell) at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 2.

The UE shall stop transmitting uplink signal in Cell 2 (PSCell) no later than time point C (D_1 after the start of the time duration T3) on the PSCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.1.6 EN-DC Radio Link Monitoring In-sync Test for FR2 PSCell configured with CSI-RS-based RLM in non-DRX mode

A.5.5.1.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PSCell when no DRX is used. This test will partly verify the FR2 TDD PSCell CSI-RS In-sync radio link monitoring requirements in clause 8.1.

The test parameters are given in Tables A.5.5.1.6.1-1, A.5.5.1.6.1-2, and A.5.5.1.6.1-3 below. There are two cells, cell 1which is the E-UTRAN PCell, and cell 2 is the PSCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.5.5.1.6.1-1 shows the variation of the downlink SNR in the PSCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. In the test, DRX configuration is not enabled. In the test, SSB0 and SSB1 are configured as BFD-RS.

Table A.5.5.1.6.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR2	

Table A.5.5.1.6.1-2: General test parameters for FR2 PSCell for CSI-RS in-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active E-UTRA PCell			Cell 1
E-UTRA RF Channel Number			1
Active PSCell			Cell 2
RF Channel Number			2
Duplex Mode			TDD
$BW_{channel}$	Config 1, 2		100: $N_{RB,c}$ = 66
Data RBs allocated	Config 1, 2		24
$BW_{occupied}$	Config 1, 2		24
TDD Configuration	Config 1		TDDConf.3.1
	Config 2		TDDConf.3.1
DL initial BWP configuration	Config 1, 2		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2		DLBWP.1.4
UL initial BWP configuration	Config 1, 2		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2		ULBWP.1.4
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD
	Config 2		CR.3.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.3.1 TDD CCR.3.3 TDD
	Config 2		CCR.3.1 TDD CCR.3.3 TDD
SSB Configuration	Config 1		SSB.1 FR2
	Config 2		SSB.1 FR2
SMTC Configuration	Config 1		SMTC.1
	Config 2		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1		120 KHz
	Config 2		120 KHz
CSI-RS for RLM	Config 1, 2		Resource #4 in TRS.2.1 TDD Resource #4 in TRS.2.2 TDD
OCNG parameters			OP.5
TRS configuration			TRS.2.1 TDD TRS.2.2 TDD
TCI configuration for PDCCH#1/PDSCH			TCI.State.2
TCI configuration for PDCCH#2			TCI.State.3
CP length			Normal
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2

	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			*OFF*
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*
T310 timer		ms	1000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1		CSI-RS.3.1 TDD
	Config 2		CSI-RS.3.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
T1		s	0.2
T2		s	0.2
T3		s	0.24
T4		s	0.2
T5		s	0.88
D1		s	0.84
Note 1: UE-specific PDCCH is not transmitted after T1 starts. Note 2: E-UTRAN is in non-DRX mode under test.			

Table A.5.5.1.6.1-3: Cell specific test parameters for FR2 for CSI-RS in-sync radio link monitoring in non-DRX mode

Parameter	Unit	Test 1									
		T1	T2	T3	T4	T5	T1	T2	T3	T4	T5
AoA setup		Setup 3 defined in A.3.15									
		AoA1					AoA2				
Assumption for UE beams[Note 10]		Rough					Rough				

EPRE ratio of PDCCH DMRS to SSS		dB	0					Not sent				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0									
EPRE ratio of PBCH DMRS to SSS		dB										
EPRE ratio of PBCH to PBCH DMRS		dB										
EPRE ratio of PSS to SSS		dB										
EPRE ratio of PDSCH DMRS to SSS		dB										
EPRE ratio of PDSCH to PDSCH DMRS		dB										
EPRE ratio of OCNG DMRS to SSS		dB										
EPRE ratio of OCNG to OCNG DMRS		dB										
SNR on RLM-RS1	Config 1, 2	dB	2 Note 11	-6 Note 11	-15	-4.5	2 Note 11					
SNR on RLM-RS2	Config 1, 2	dB	Not sent					2 Note 11	-15	-15	-15	-15
N_{oc}	Config 1, 2	dBm/ 15KHz	-92.1					-92.1				
Propagation condition			TDL-A 30ns 75Hz					TDL-A 30ns 75Hz				

Note 1: OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure A.5.5.1.6.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6.
Note 10: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.
Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband

Table A.5.5.1.6.1-3A: Void

Table A.5.5.1.6.1-4: Void

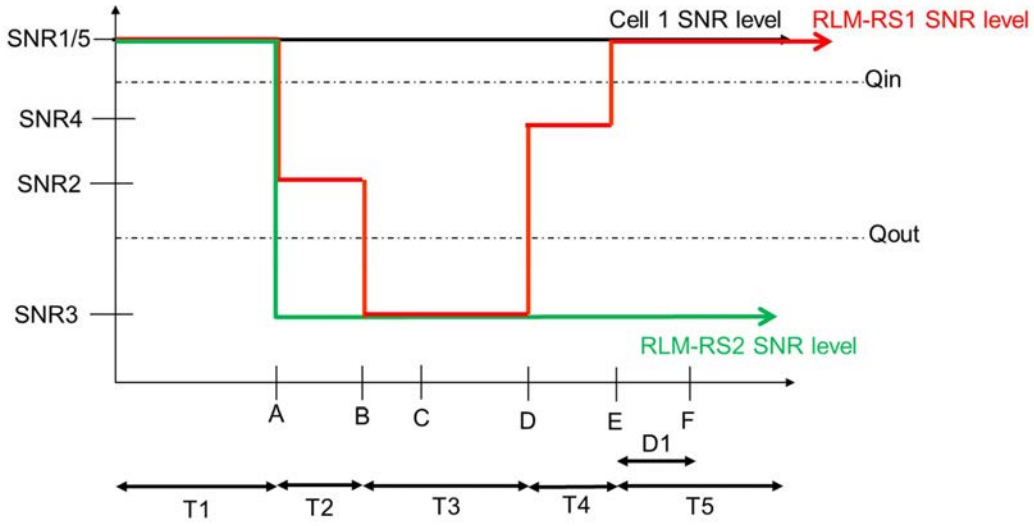

Figure A.5.5.1.6.1-1: SNR variation for CSI-RS in-sync testing

A.5.5.1.6.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting on the PSCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.1.7 EN-DC Radio Link Monitoring Out-of-sync Test for FR2 PSCell configured with CSI-RS-based RLM in DRX mode

A.5.5.1.7.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PSCell when DRX is used. This test will partly verify the FR2 TDD PSCell CSI-RS Out-of-sync radio link monitoring requirements in clause 8.1.

The test parameters are given in Tables A.5.5.1.7.1-1, A.5.5.1.7.1-2, and A.5.5.1.7.1-3 below. There are two cells, cell 1 is the E-UTRAN PCell, and cell 2 is the PSCell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.5.5.1.7.1-1 shows the variation of the downlink SNR in the E-UTRAN PCell and the PSCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. In the test, DRX configuration is enabled in PSCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test. In the test, SSB0 and SSB1 are configured as BFD-RS and are not same as RLM-RS to avoid triggering the beam failure during the RLM test.

Table A.5.5.1.7.1-1: Supported test configurations for FR2 PSCell

Configuration	Description

1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR2	

Table A.5.5.1.7.1-2: General test parameters for FR2 PSCell for CSI-RS out-of-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active E-UTRA PCell			Cell 1
E-UTRA RF Channel Number			1
Active PSCell			Cell 2
RF Channel Number			2
Duplex Mode			TDD
TDD Configuration	Config 1		TDDConf.3.1
	Config 2		TDDConf.3.1
DL initial BWP configuration	Config 1, 2		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2		DLBWP.1.1
UL initial BWP configuration	Config 1, 2		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1		CR. 3.1 TDD
	Config 2		CR. 3.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR. 3.4 TDD CCR.3.6 TDD
	Config 2		CCR. 3.4 TDD CCR.3.6 TDD
SSB Configuration	Config 1		SSB.1 FR2
	Config 2		SSB.1 FR2
SMTC Configuration	Config 1		SMTC.1
	Config 2		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1		120 KHz
	Config 2		120 KHz
CSI-RS for RLM	Config 1, 2		Resource #4 in TRS.2.1 TDD Resource #4 in TRS.2.2 TDD
SSB index for BFD-RS	Config 1, 2		0, 1
TRS configuration			TRS.2.1 TDD TRS.2.2 TDD
TCI configuration for PDCCH#1/PDSCH			TCI.State.2
TCI configuration for PDCCH#2			TCI.State.3
OCNG parameters			OP.1
CP length			Normal
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8

	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			DRX.3
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*
T310 timer		ms	*0*
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1		CSI-RS.3.1 TDD
	Config 2		CSI-RS.3.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
T1		s	0.2
T2		s	1.28
T3		s	1.28
D1		s	1.24
Note 1: UE-specific PDCCH is not transmitted after T1 starts. Note 2: E-UTRAN is in non-DRX mode under test.			

Table A.5.5.1.7.1-3: Cell specific test parameters for FR2 for CSI-RS out-of-sync radio link monitoring in DRX mode

Parameter		Unit	Test 1		
			T1	T2	T3
AoA setup			Setup 1 defined in A.3.15		
Assumption for UE beams[Note 10]			Rough		
EPRE ratio of PDCCH DMRS to SSS		dB	4		
EPRE ratio of PDCCH to PDCCH DMRS		dB			
EPRE ratio of PBCH DMRS to SSS		dB	0		
EPRE ratio of PBCH to PBCH DMRS		dB			
EPRE ratio of PSS to SSS		dB			
EPRE ratio of PDSCH DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS1	Config 1, 2	dB	2[Note 11]	-6[Note 11]	-15

SNR on RLM-RS2	Config 1, 2	dB	2[Note 11]	-15	-15
N_{oc}	Config 1	dBm/15KHz	-104.7		
	Config 2		-104.7		
Propagation condition			TDL-A 30ns 75Hz		

Note 1: OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.5.5.1.7.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6.
Note 10: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.
Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband.

Table A.5.5.1.7.1-3A: Void

Table A.5.5.1.7.1-4: Void

Table A.5.5.1.7.1-5: Void

Table A.5.5.1.7.1-6: Void

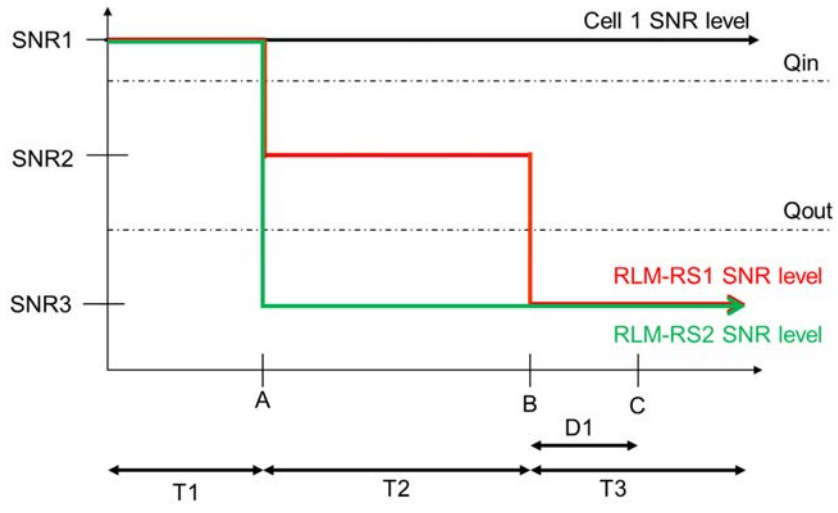

Figure A.5.5.1.7.1-1: SNR variation for CSI-RS out-of-sync testing

A.5.5.1.7.2 Test Requirements

The UE behaviour during time durations T1, T2, and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 2 (PSCell) at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 2.

The UE shall stop transmitting uplink signal in Cell 2 (PSCell) no later than time point C (D_1 after the start of the time duration T3) on the PSCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.1.8 EN-DC Radio Link Monitoring In-sync Test for FR2 PSCell configured with CSI-RS-based RLM in DRX mode

A.5.5.1.8.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PSCell when DRX is used. This test will partly verify the FR2 TDD PSCell CSI-RS In-sync radio link monitoring requirements in clause 8.1.

The test parameters are given in Tables A.5.5.1.8.1-1, A.5.5.1.8.1-2, A.5.5.1.8.1-3 and A.5.5.1.8.1-3A below. There are two cells, cell 1which is the E-UTRAN PCell, and cell 2 is the NR PSCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.5.5.1.8.1-1 shows the variation of the downlink SNR in the PSCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. In the test, DRX configuration is enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms). In the test, SSB0 and SSB1 are configured as BFD-RS and are not same as RLM-RS to avoid triggering the beam failure during the RLM test.

Table A.5.5.1.8.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR2	

Table A.5.5.1.8.1-2: General test parameters for FR2 PSCell for CSI-RS in-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active E-UTRA PCell			Cell 1
E-UTRA RF Channel Number			1
Active PSCell			Cell 2
RF Channel Number			2
Duplex Mode			TDD
TDD Configuration	Config 1		TDDConf.3.1
	Config 2		TDDConf.3.1
DL initial BWP configuration	Config 1, 2		DLBWP.0.1
DL dedicated	Config 1, 2		DLBWP.1.1

BWP configuration			
UL initial BWP configuration	Config 1, 2		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD
	Config 2		CR.3.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.3.1 TDD CCR.3.3 TDD
	Config 2		CCR.3.1 TDD CCR.3.3 TDD
SSB Configuration	Config 1		SSB.1 FR2
	Config 2		SSB.1 FR2
SMTC Configuration	Config 1		SMTC.1
	Config 2		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1		120 KHz
	Config 2		120 KHz
CSI-RS for RLM	Config 1, 2		Resource #4 in TRS.2.1 TDD Resource #4 in TRS.2.2 TDD
SSB index for BFD-RS	Config 1, 2		0, 1
TRS configuration			TRS.2.1 TDD TRS.2.2 TDD
TCI configuration for PDCCH#1/PDSCH			TCI.State.2
TCI configuration for PDCCH#2			TCI.State.3
OCNG parameters			OP.1
CP length			Normal
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4

	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			DRX.3
Gap pattern ID			*gp0*
Layer 3 filtering			*Enabled*
T310 timer		ms	2000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1		CSI-RS.3.1 TDD
	Config 2		CSI-RS.3.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
T1		s	0.2
T2		s	0.2
T3		s	1.64
T4		s	0.2
T5		s	1.88
D1		s	1.84
Note 1: UE-specific PDCCH is not transmitted after T1 starts. Note 2: E-UTRAN is in non-DRX mode under test.			

Table A.5.5.1.8.1-3: Cell specific test parameters for FR2 for CSI-RS in-sync radio link monitoring in DRX mode

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
AoA setup		Setup 1 defined in A.3.15				
Assumption for UE beams[Note 10]		Rough				
EPRE ratio of PDCCH DMRS to SSS	dB	0				
EPRE ratio of PDCCH to PDCCH DMRS	dB					
EPRE ratio of PBCH DMRS to SSS	dB	0				
EPRE ratio of PBCH to PBCH DMRS	dB					
EPRE ratio of PSS to SSS	dB					
EPRE ratio of PDSCH DMRS to SSS	dB					
EPRE ratio of PDSCH to PDSCH DMRS	dB					
EPRE ratio of OCNG DMRS to SSS	dB					

EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS1	Config 1, 2	dB	2 Note 11	-6 Note 11	-15	-4.5	2 Note 11
SNR on RLM-RS2	Config 1, 2	dB	2 Note 11	-15	-15	-15	-15
N_{oc}	Config 1, 2	dBm/15KHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz				

Note 1: OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure A.5.5.1.8.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6.
Note 10: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.
Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband

Table A.5.5.1.8.1-3A: Measurement gap configuration for FR2 CSI-RS in-sync radio link monitoring in DRX mode

Field	Test 1
	Value
gapOffset	0

Note 1: E-UTRAN PCell and PSCell are SFN-synchronous and frame boundary aligned. (Ensure that RLM RS is partially overlapped with measurement gap)

Table A.5.5.1.8.1-4: Void

Table A.5.5.1.8.1-5: Void

Table A.5.5.1.8.1-6: Void

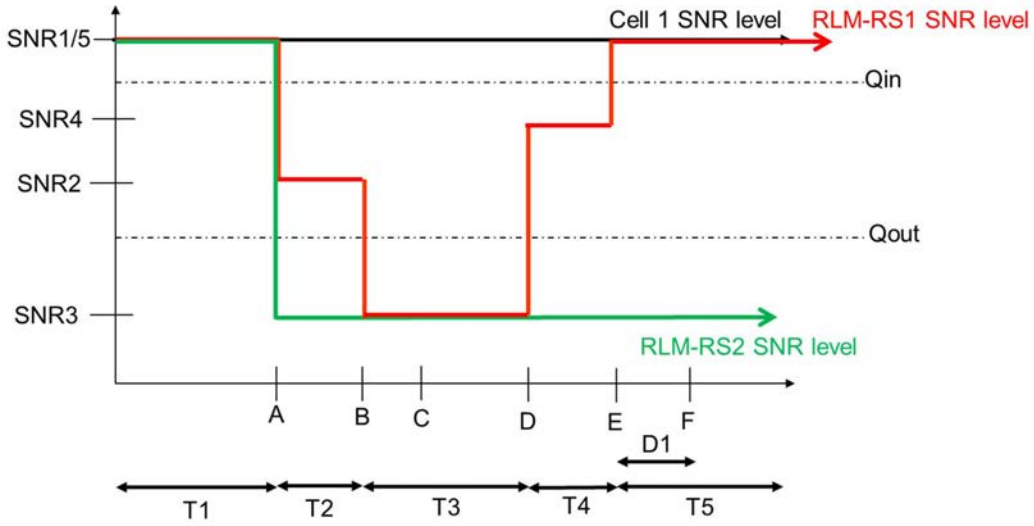

Figure A.5.5.1.8.1-1: SNR variation for CSI-RS in-sync testing

A.5.5.1.8.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting on the PSCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.1.9 EN-DC Radio Link Monitoring UE Scheduling Restrictions on FR2

A.5.5.1.9.1 Test Purpose and Environment

The purpose is to verify that the NR UE correctly follows the RLM scheduling restrictions requirements defined in clause 8.1.7. This test verifies that the UE correctly receive the PDCCH scheduled on the symbols right before the RLM SSB symbols without overlap so that it sends ACK/NACK correctly. The test case is only applicable to UE which supports pdcch-MonitoringAnyOccasions or pdcch-MonitoringAnyOccasionsWithSpanGap.

Two cells are deployed in the test, which are E-UTRAN PCell (Cell 1) and NR FR2 PSCell (Cell 2). The test parameters for NR PSCell are given in table A.5.5.1.9.1-1, table A.5.5.1.9.1-2 and table A.5.5.1.9.1-3 below and the parameters and applicability for the E-UTRAN cell are defined in A.3.7.2. The UE is required during time period T1 to transmit ACK/NACK correctly upon scheduling of PDSCH.

Table A.5.5.1.9.1-1: Supported test configurations

Configuration	Description

1	FDD LTE, 120 kHz SSB SCS, 120 kHz RMC SCS, 100 MHz bandwidth, TDD duplex mode
2	TDD LTE, 120 kHz SSB SCS, 120 kHz RMC SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.5.5.1.9.1-2: General test parameters for RLM scheduling restriction test case in FR2

Parameter	Unit	Test configuration	Value	Comment
RF Channel Number		1, 2	1 and 2	1 for NR PSCell and 2 for LTE PCell
SSB configuration		1, 2	SSB.1 FR2	
SMTC configuration		1, 2	SMTC pattern 1	
DRX cycle length	s	1, 2	OFF	
T1	s	1, 2	5	During T1 the UE is required to correctly transmit ACK/NACK

Table A.5.5.1.9.1-3: Cell specific test parameters for RLM scheduling restriction test case in FR2

Parameter	Unit	Test configuration	Cell 2	
AoA setup		1, 2	Setup 3 defined in A.3.15.3	
			AoA1	AoA2
Assumption for UE beams Note 1			Rough	Rough
TDD configuration		1, 2	TDDConf.3.1	
$BW_{channel}$	MHz	1, 2	100: $N_{RB,c}$ = 66	
Data RBs allocated		1, 2	24	
PDSCH Reference measurement channel		1, 2	SR.3.2 TDD	Not sent
RMSI CORESET RMC configuration		1, 2	CR.3.1 TDD	Not sent
Dedicated CORESET RMC configuration		1, 2	CCR.3.2 TDD	Not sent
TRS configuration		1, 2	TRS.2.1 TDD	TRS.2.2 TDD
PDCCH/PDSCH TCI state		1, 2	TCI.State.2	Not sent
OCNG Pattern		1, 2	OP.5 defined in A.3.2.1	Not sent
Initial DL BWP configuration		1, 2	DLBWP.0.1	
Initial UL BWP configuration		1, 2	ULBWP.0.1	
RLM-RS		1, 2	SSB with index 0	SSB with index 1
N_{oc}	dBm/15kHz	1, 2	-92.1	-92.1
N_{oc} Note2	dBm/SCS	1, 2	-84.9	Not sent
$\hat{E}_s / N_{oc}$	dB	1, 2	3	N/A
$\hat{E}_s / I_{ot}$ BB Note 4	dB	1, 2	1	1

SSB_RP Note3	dBm/SCS	1, 2	-81.1	-81.1
Io	dBm/95.04 MHz	1, 2	-54.35	-54.35
Time multiplexing of the downlink transmissions from each AoA		1, 2	Defined in Figure A.5.5.1.9.1-1	
Propagation Condition		1, 2	AWGN	AWGN

Note 1: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Calculation of Es/Iot$_{BB}$ includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB$_S$ from TS 38.101-2 [19] Table 6.2.1.3-4.

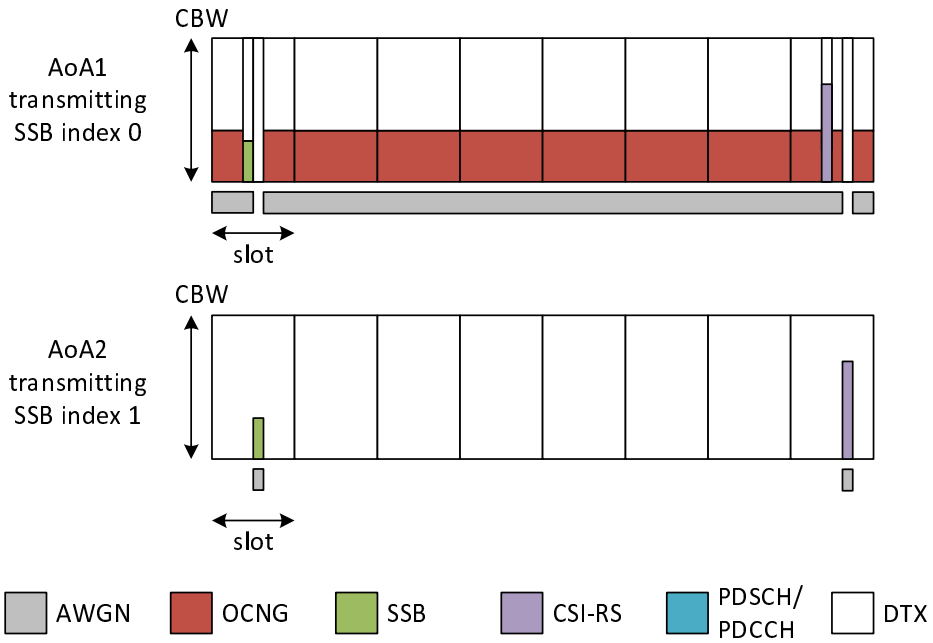

Figure A.5.5.1.9.1-1: Time multiplexed downlink transmissions

A.5.5.1.9.2 Test Requirements

The UE behaviour follows the requirements defined in clause 8.1.7.3.

A.5.5.1.10 Radio Link Monitoring Out-of-sync Test for FR2 PSCell configured with SSB-based RLM RS for UE fulfilling relaxed measurement criterion

A.5.5.1.10.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PSCell when DRX is used. This test will partly verify the FR2 radio link monitoring requirements in clause 8.1.2.4 for UE fulfilling good serving cell quality criterion.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to '*rlf*'. Supported test configurations are shown in table A.5.5.1.10.1-1. The test parameters are given in Tables A.5.5.1.10.1-2, and A.5.5.1.10.1-3. There are two cells, Cell 1 is the E-UTRAN PCell, and Cell 2 is the PSCell, in the test. The E-UTRAN PCell setting refers to Table A.3.7.2.1-2. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.5.5.1.10.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and Cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

Table A.5.5.1.10.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
1	FDD LTE PCell, NR 120 KHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	TDD LTE PCell, NR 120 KHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR2	

Table A.5.5.1.10.1-2: General test parameters for FR2 out-of-sync testing for UE fulfilling relaxed measurement criterion

Parameter		Unit	Value
			Test 1
Active E-UTRA PCell			Cell 1
E-UTRA RF Channel Number			1
Active PSCell			Cell 2
RF Channel Number			2
Duplex mode	Config 1, 2		TDD
$BW_{channel}$	Config 1, 2		100: $N_{RB,c}$ = 66
Data RBs allocated	Config 1, 2		66
DL initial BWP configuration	Config 1, 2		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2		DLBWP.1.1
UL initial BWP configuration	Config 1, 2		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2		ULBWP.1.1
TDD Configuration	Config 1, 2		TDDConf.3.1
RMSI CORESET Reference Channel	Config 1, 2		CR.3.1 TDD
Dedicated CORESET Reference Channel	Config 1, 2		CCR.3.4 TDD
SSB Configuration	Config 1, 2		SSB.1 FR2
SMTC Configuration	Config 1, 2		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2		120 KHz

PRACH Configuration		Config 1, 2		Table A.3.8.3.4
SSB index assigned as RLM RS		Config 1, 2		0
OCNG parameters				OP.1
CP length				Normal
Out of sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	4
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
DRX Configuration				DRX.3
Gap pattern ID				N.A.
Layer 3 filtering				*Enabled*
T310 timer			ms	*0*
T311 timer			ms	1000
N310				1
N311				1
CSI-RS for CSI reporting		Config 1, 2		CSI-RS.3.1 TDD
reportConfigType				periodic
reportQuantity				cri-RI-PMI-CQI
CSI reporting periodicity			slot	40
CSI reporting offset			slot	4
TCI states for PDCCH/PDSCH				TCI.State.2
CSI-RS for tracking		Config 1, 2		TRS.2.1 TDD
T1			s	0.2
T2			s	14.48
T3			s	28.88
D1			s	28.84
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts. Note 3: E-UTRAN is in non-DRX mode under test.				

Table A.5.5.1.10.1-3: OTA related cell specific test parameters for FR2 (Cell 2) for out-of-sync radio link monitoring tests for UE fulfilling relaxed measurement criterion

Parameter	Unit	Test 1		
		T1	T2	T3
AoA setup		Setup 1 defined in A.3.15		
Assumption for UE beams[Note 5]		Rough		
EPRE ratio of PDCCH DMRS to SSS	dB	4		
EPRE ratio of PDCCH to PDCCH DMRS	dB	0		
EPRE ratio of PBCH DMRS to SSS	dB	0		
EPRE ratio of PBCH to PBCH DMRS	dB			
EPRE ratio of PSS to SSS	dB			
EPRE ratio of PDSCH DMRS to SSS	dB			
EPRE ratio of PDSCH to PDSCH DMRS	dB			
EPRE ratio of OCNG DMRS to SSS	dB			
EPRE ratio of OCNG to OCNG DMRS	dB			

ssb-Index 0 SNR	Config 1, 2	dB	2[Note 6]	2[Note 6]	-15
N_{oc}	Config 1, 2	dBm/15K Hz	-104.7dBm		
goodServingCellEvaluationRLM			configured		
offset in goodServingCellEvaluationRLM		dB	Not configured		
Propagation condition			TDL-A 30ns 75Hz		

Note 1: OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 4: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6.
Note 5: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 6: This value allows up to 1dB degradation from applied SNR to UE baseband

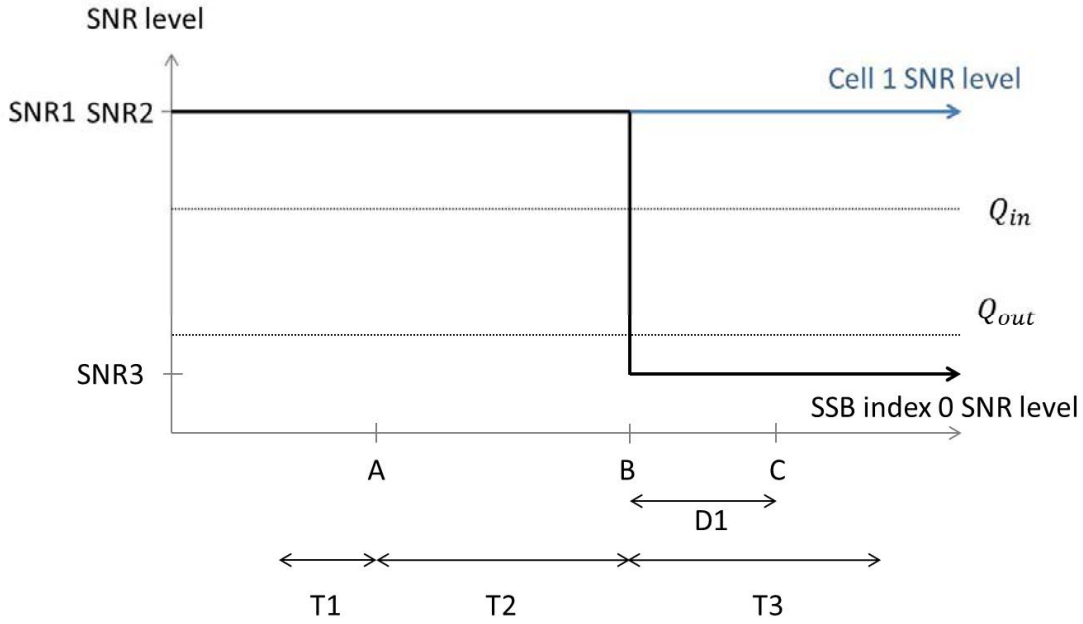

Figure A.5.5.1.10.1-1: SNR variation for out-of-sync testing

A.5.5.1.10.2 Test Requirements

The UE behavior in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal in Cell 2 no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.2 Interruption

A.5.5.2.1 E-UTRAN – NR FR2 interruptions at transitions between active and non-active during DRX in synchronous EN-DC

A.5.5.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that when E-UTRA PCell is in DRX and NR PSCell is in non-DRX, NR PSCell interruptions due to transitions from active to non-active and from non-active to active during LTE PCell DRX the UE missed ACK/NACK does not exceed the limits. This test will verify the missed ACK/NACK rate for NR PSCell in EN-DC specified in clause 8. 2.1.2. Supported test configurations are shown in table A.5.5.2.1.1-1.

The general test parameters are given in Table A.5.5.2.1.1-2, and NR cell specific test parameters are given in Table A.5.5.2.1.1-3 and A.5.5.2.1.1-4. The E-UTRAN PCell DRX configuration parameters are given in Table A.5.5.2.1.1-5 below. And the E-UTRAN cell specific test parameters can refer to Table A.3.7.2.2-1. In the test there are two cells: Cell1 and Cell2. Cell1 is LTE PCell on and Cell2 is NR FR2 PSCell. The test consists of one time period, with duration of T1. During T1, NR PSCell is continuously scheduled in DL while LTE PCell is not scheduled and has DRX configured. Prior to the start of the time duration T1, Cell1 shall be configured as LTE PCell and Cell2 shall be configured as NR PSCell. Prior to start of T1 the DRX inactivity timer for the LTE PCell has already expired. During T1 the UE shall be continuously scheduled on NR PSCell while not scheduled on LTE PCell. PDCCH indicating a new transmission on PSCell shall be sent continuously during the entire time duration to ensure UE would not enter DRX state on PSCell.

Table A.5.5.2.1.1-1: Interruption at transitions between active and non-active during DRX supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.5.5.2.1.1-2: General test parameters for E-UTRAN – NR FR2 interruptions at transitions between active and non-active during DRX in synchronous EN-DC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2	One is E-UTRAN RF channel and the other is NR RF channel
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Configured PSCell		Cell2	PSCell on NR RF channel number 2.
CP length		Normal	Applicable to cell1 and cell 2
DRX		DRX.4	DRX related parameters are defined in Table A.3.3.4-1
Measurement gap pattern Id		OFF	
T1	s	6.25	

Table A.5.5.2.1.1-3: NR cell specific test parameters for E-UTRAN – NR FR2 interruptions at transitions between active and non-active during DRX in synchronous EN-DC

Parameter		Unit	Cell 2
Frequency Range			FR2
Duplex mode	Config 1,2		TDD
TDD configuration	Config 1,2		TDDConf.3.1
$BW_{channel}$	Config 1,2	MHz	100: $N_{RB,c}$ = 66
Data RBs allocated	Config 1,2		66

Downlink initial BWP Configuration	Config 1,2		DLBWP.0.1
Downlink dedicated BWP Configuration	Config 1,2		DLBWP.1.1
Uplink initial BWP configuration	Config 1,2		ULBWP.0.1
Uplink dedicated BWP configuration	Config 1,2		ULBWP.1.1
TRS configuration	Config 1,2		TRS.2.1 TDD
TCI state	Config 1,2		TCI.State.0
PDSCH Reference measurement channel	Config 1,2		SR.3.1 TDD
RMSI CORESET Reference Channel	Config 1,2		CR.3.1 TDD
RMC CORESET Reference Channel	Config 1,2		CCR.3.1 TDD
OCNG Patterns			OP.1
SSB Configuration			SSB.3 FR2
SMTC Configuration	Config 1,2		SMTC.1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
$\hat{E}_s/N_{oc}$		dB	17
Propagation Condition			AWGN
Time offset to cell1 Note 2		µs	3
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell including time alignment error between the two cells			

Table A.5.5.2.1.1-4: NR cell specific OTA related test parameters for E-UTRAN – NR FR2 interruptions at transitions between active and non-active during DRX in synchronous EN-DC

Parameter	Unit	Cell2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1
Assumption for UE beams Note 6		Fine
N_{oc} Note1	dBm/15kHz Note4	-112
N_{oc} Note1	dBm/SCS Note3	-102.97
$\hat{E}_s/N_{oc}$	dB	17
SSB_RP Note2	dBm/SCS Note4	-85.97
$\hat{E}_s/I_{ot}$	dB	17
Io Note2	dBm/95.04 MHz Note4	-56.90

Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2:	SS B_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5:	As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Table A.5.5.2.1.1-5: Void

A.5.5.2.1.2 Test Requirements

The UE shall be continuously scheduled in NR PSCell during the entire length of T1. UE shall not be scheduled in LTE PCell during T1. During the time duration T1 the UE shall transmit at least 99% of ACK/NACK on NR PSCell.

Interruption on NR PSCell shall not exceed 0.625ms (5 slots) as defined in clause 8. 2.1.

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.2.2 E-UTRAN – NR FR2 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC

A.5.5.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that when LTE PCell is in DRX and NR PSCell is in non-DRX, NR PSCell interruptions due to transitions from active to non-active and from non-active to active during LTE PCell DRX the UE missed ACK/NACK does not exceed the limits. This test will verify the missed ACK/NACK rate for NR PSCell in EN-DC specified in clause 8. 2.1.2. Supported test configurations are shown in table A.5.5.2.2.1-1.

The general test parameters are given in Table A.5.5.2.2.1-2, and NR cell specific test parameters are given in Table A.5.5.2.2.1-3 and A.5.5.2.2.1-4. The E-UTRAN PCell DRX configuration parameters are given in Table A.5.5.2.2.1-5 below. And the E-UTRAN cell specific test parameters can refer to Table A.3.7.2.2-1. In the test there are two cells: Cell1 and Cell2. Cell1 is LTE PCell and Cell2 is NR PSCell. The test consists of one time period, with duration of T1. During T1, NR PSCell is continuously scheduled in DL while LTE PCell is not scheduled and has DRX configured. Prior to the start of the time duration T1, Cell1 shall be configured as LTE PCell and Cell2 shall be configured as NR PSCell. Prior to start of T1 the DRX inactivity timer for the LTE PCell has already expired. During T1 the UE shall be continuously scheduled on NR PSCell while not scheduled on LTE PCell. PDCCH indicating a new transmission on PSCell shall be sent continuously during the entire time duration to ensure UE would not enter DRX state on PSCell.

Table A.5.5.2.2.1-1: Interruption at transitions between active and non-active during DRX supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.5.5.2.2.1-2: General test parameters for E-UTRAN – NR FR2 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2	One is E-UTRAN RF channel and the other is NR RF channel
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Configured PSCell		Cell2	PSCell on NR RF channel number 2.
CP length		Normal	Applicable to cell1 and cell 2
DRX		DRX.6	DRX related parameters are defined in Table A.3.3.6-1
Measurement gap pattern Id		OFF	
T1	s	6.25	

Table A.5.5.2.2.1-3: NR cell specific test parameters for E-UTRAN – NR FR2 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC

Parameter		Unit	Cell 2
Frequency Range			FR2
Duplex mode	Config 1,2		TDD
TDD configuration	Config 1,2		TDDConf.3.1
$BW_{channel}$	Config 1,2	MHz	100: $N_{RB,c}$ = 66
Data RBs allocated	Config 1,2		66
Downlink initial BWP Configuration	Config 1,2		DLBWP.0.1
Downlink dedicated BWP Configuration	Config 1,2		DLBWP.1.1
Uplink initial BWP configuration	Config 1,2		ULBWP.0.1
Uplink dedicated BWP configuration	Config 1,2		ULBWP.1.1
TRS configuration	Config 1,2		TRS.2.1 TDD
TCI state	Config 1,2		TCI.State.0
PDSCH Reference measurement channel	Config 1,2		SR.3.1 TDD
RMSI CORESET Reference Channel	Config 1,2		CR.3.1 TDD
RMC CORESET Reference Channel	Config 1,2		CCR.3.1 TDD
OCNG Patterns			OP.1
SSB Configuration			SSB.3 FR2
SMTC Configuration	Config 1,2		SMTC.1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
$\hat{E}_s/N_{oc}$		dB	17
Propagation Condition			AWGN
Time offset to cell1 Note 2		µs	62.5

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell including time alignment error between the two cells

Table A.5.5.2.2.1-4: NR cell specific OTA related test parameters for E-UTRAN – NR FR2 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC

Parameter	Unit	Cell2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1
Assumption for UE beams[Note 6]		Fine
N_{oc} [Note1]	dBm/15kHz[Note4]	-112
N_{oc} [Note1]	dBm/SCS[Note3]	-102.97
$\hat{E}_s / N_{oc}$	dB	17
SS B_RP[Note2]	dBm/SCS [Note4]	-85.97
$\hat{E}_s / I_{ot}$	dB	17
Io[Note2]	dBm/95.04 MHz [Note4]	-56.90
Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.	
Note 2:	SS B_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.	
Note 3:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.	
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone	
Note 5:	As observed with 0dBi gain antenna at the centre of the quiet zone	
Note 6:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation	

Table A.5.5.2.2.1-5: Void

A.5.5.2.2.2 Test Requirements

The UE shall be continuously scheduled in NR PSCell during the entire length of T1. UE shall not be scheduled in LTE PCell during T1. During the time duration T1 the UE shall transmit at least 99% of ACK/NACK on NR PSCell.

Interruption on NR PSCell shall not exceed 0.625ms (5 slots) as defined in clause 8. 2.1.

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.2.3 E-UTRAN – NR FR2 interruptions during measurements on deactivated NR SCC in synchronous EN-DC

A.5.5.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that for NR PSCell interruptions during the measurement on the deactivated NR SCC, the UE missed ACK/NACK does not exceed the limits. This test will verify the missed ACK/NACK rate for and NR PSCell in EN-DC specified in clause 8. 2.1.2. Supported test configurations are shown in table A.5.5.2.3.1-1.

The general test parameters are given in Table A.5.5.2.3.1-2, and NR cell specific test parameters are given in Table A.5.5.2.3.1-3 and A.5.5.2.3.1-4 below. The E-UTRAN cell specific test parameters can be found in Table A.3.7.2.1-2. In the test there are three cells: Cell1, Cell2 and Cell3. Cell1 is LTE PCell, Cell2 and Cell 3 are NR FR2 PSCell and NR FR2 deactivated SCell, respectively. Cell1 shall be configured as LTE PCell and Cell2 shall be configured as NR PSCell. The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, the UE is connected to Cell1 and Cell2. The point in time at which the RRC message including *measCycleSCell* for the deactivated NR SCells is received by the UE, defines the start of time period T1. During T1, LTE PCell and NR PSCell are continuously scheduled in DL.

Table A.5.5.2.3.1-1: Interruption during measurements on deactivated NR SCC supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.5.5.2.3.1-2: General test parameters for E-UTRAN – NR FR2 interruptions during measurements on deactivated NR SCC in synchronous EN-DC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2, 3	One is E-UTRAN RF channel and the other two are NR RF channels
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Configured PSCell		Cell2	PSCell on NR RF channel number 2.
Configured deactivated SCell		Cell3	Deactivated SCell on NR RF channel number 3.
CP length		Normal	Applicable to cell1, cell 2 and cell3
DRX		OFF	
Measurement gap pattern Id		OFF	
SCell measurement cycle (measCycleSCell)	Ms	640	
T1	S	10	

Table A.5.5.2.3.1-3: NR cell specific test parameters for E-UTRAN – NR FR2 interruptions during measurements on deactivated NR SCC in synchronous EN-DC

Parameter		Unit	Cell 2	Cell 3
Frequency Range			FR2	FR2
Duplex mode	Config 1,2		TDD	TDD
TDD configuration	Config 1,2		TDDConf.3.1	TDDConf.3.1
$BW_{channel}$	Config 1,2	MHz	100: $N_{RB,c}$ = 66	100: $N_{RB,c}$ = 66
Data RBs allocated	Config 1,2		66	66
Downlink initial BWP Configuration	Config 1,2		DLBWP.0.1	DLBWP.0.1

Downlink dedicated BWP Configuration	Config 1,2		DLBWP.1.1	DLBWP.1.1
Uplink initial BWP configuration	Config 1,2		ULBWP.0.1	ULBWP.0.1
Uplink dedicated BWP configuration	Config 1,2		ULBWP.1.1	ULBWP.1.1
PDSCH Reference measurement channel	Config 1,2		SR.3.1 TDD	-
RMSI CORESET Reference Channel	Config 1,2		CR.3.1 TDD	CR.3.1 TDD
PDCCH CORESET parameters	Config 1,2		CCR 3.1 TDD	CCR 3.1 TDD
OCNG Patterns			OP.1	OP.1
SSB Configuration	Config 1,2		SSB.1 FR2	SSB.1 FR2
SMTC Configuration	Config 1,2		SMTC.1	SMTC.1
TRS configuration	Config 1,2		TRS.2.1 TDD	TRS.2.1 TDD
TCI state	Config 1,2		TCI.State.0	TCI.State.0
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
Propagation Condition			AWGN	AWGN
Time offset to cell1 Note 2		µs	3	3+ Time offset to cell2
Time offset to cell2 Note 3		µs	-	3

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell including time alignment error between the two cells
Note 3: Receive time difference of signals received between slot timing boundary from two NR Cells including time alignment error between the two cells

Table A.5.5.2.3.1-4: NR cell specific OTA related test parameters for E-UTRAN – NR FR2 interruptions during measurements on deactivated NR SCC in synchronous EN-DC

Parameter		Unit	Cell 2	Cell 3
Angle of arrival configuration			Setup 1 defined in clause A.3.15.1	
Assumption for UE beams Note 6			Fine	Rough
N_{oc} Note1	NR_TDD_FR2_A	dBm/15kHz	-111.7	-104.7
	NR_TDD_FR2_B			
	NR_TDD_FR2_F			
	NR_TDD_FR2_G			
	NR_TDD_FR2_T			
	NR_TDD_FR2_Y			
N_{oc} Note1	NR_TDD_FR2_A	dBm/SCS Note3	-102.7	-95.7
	NR_TDD_FR2_B			
	NR_TDD_FR2_F			
	NR_TDD_FR2_G			
	NR_TDD_FR2_T			
	NR_TDD_FR2_Y			
SSB_RP Note2	NR_TDD_FR2_A	dBm/SCS Note4	-90.7	-90.7
	NR_TDD_FR2_B			

	NR_TDD_FR2_F			
	NR_TDD_FR2_G			
	NR_TDD_FR2_T			
	NR_TDD_FR2_Y			
$\hat{E}_s/I_{ot}$	NR_TDD_FR2_A	dB	12	5
	NR_TDD_FR2_B			
	NR_TDD_FR2_F			
	NR_TDD_FR2_G			
	NR_TDD_FR2_T			
	NR_TDD_FR2_Y			
$\hat{E}_s/N_{oc}$	NR_TDD_FR2_A	dB	12	5
	NR_TDD_FR2_B			
	NR_TDD_FR2_F			
	NR_TDD_FR2_G			
	NR_TDD_FR2_T			
	NR_TDD_FR2_Y			
Io[Note2]	NR_TDD_FR2_A	dBm/95.04 MHz [Note4]	-61.45	-60.52
	NR_TDD_FR2_B			
	NR_TDD_FR2_F			
	NR_TDD_FR2_G			
	NR_TDD_FR2_T			
	NR_TDD_FR2_Y			

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.5.5.2.3.2 Test Requirements

The UE shall be continuously scheduled in LTE PCell and NR PSCell during the entire length of T1. During the time duration T1 the UE shall transmit at least 99.5% of ACK/NACK on NR PSCell.

If the NR PSCell is not in the same band as the deactivated SCell, the UE is only allowed to cause interruptions on NR PSCell immediately before and immediately after an SMTC. Each interruption on NR PSCell shall not exceed the value defined in Table A.5.5.2.3.2-1.

If the NR PSCell is in the same band as the deactivated SCell, the UE is only allowed to cause an interruption on PSCell no earlier than 4 slot before an SMTC and no later than 4 slot after the SMTC. the interruption on NR PSCell shall not exceed the value defined in Table A.5.5.2.3.2-2.

Table A.5.5.2.3.2-1: Interruption duration if the NR PSCell is not in the same band as the deactivated SCell

μ	NR Slot length (ms)	Interruption length (slot)
3	0.125	4

Table A.5.5.2.3.2-2: Interruption duration if the NR PSCell is in the same band as the deactivated SCell

μ	NR Slot length (ms)	Interruption length (slot)
3	0.125	8 + SMTC duration

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.2.4 E-UTRAN – NR FR2 interruptions during measurements on deactivated NR SCC in asynchronous EN-DC

A.5.5.2.4.1 Test Purpose and Environment

The purpose of this test is to verify that for NR PSCell interruptions during the measurement on the deactivated NR SCC, the UE missed ACK/NACK does not exceed the limits. This test will verify the missed ACK/NACK rate for NR PSCell in EN-DC specified in clause 8. 2.1.2. Supported test configurations are shown in table A.5.5.2.4.1-1.

The general test parameters are given in Table A.5.5.2.4.1-2, and NR cell specific test parameters are given in Table A.5.5.2.4.1-3 and A.5.5.2.4.1-4 below. The E-UTRAN cell specific test parameters can be found in Table A.3.7.2.1-2. In the test there are three cells: Cell1, Cell2 and Cell3. Cell1 is LTE PCell, Cell2 and Cell 3 are NR FR2 PSCell and NR FR2 deactivated SCell, respectively. Cell1 shall be configured as LTE PCell and Cell2 shall be configured as NR PSCell. The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, the UE is connected to Cell1 and Cell2. The point in time at which the RRC message including *measCycleSCell* for the deactivated NR SCells is received by the UE, defines the start of time period T1. During T1, LTE PCell and NR PSCell are continuously scheduled in DL.

Table A.5.5.2.4.1-1: Interruption during measurements on deactivated NR SCC supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.5.5.2.4.1-2: General test parameters for E-UTRAN – NR interruptions during measurements on deactivated NR SCC in asynchronous EN-DC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2, 3	One is E-UTRAN RF channel and the other two are NR RF channels
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Configured PSCell		Cell2	PSCell on NR RF channel number 2.
Configured deactivated SCell		Cell3	Deactivated SCell on NR RF channel number 3.
CP length		Normal	Applicable to cell1, cell 2 and cell3
AoA number		1	Applicable to cell2 and cell3
DRX		OFF	
Measurement gap pattern Id		OFF	
SCell measurement cycle (measCycleSCell)	ms	640	
T1	s	10	

Table A.5.5.2.4.1-3: NR cell specific test parameters for E-UTRAN – NR interruptions during measurements on deactivated NR SCC in asynchronous EN-DC

Parameter		Unit	Cell 2	Cell 3
Frequency Range			FR2	FR2
Duplex mode	Config 1,2		TDD	TDD
TDD configuration	Config 1,2		TDDConf.3.1	TDDConf.3.1
$BW_{channel}$	Config 1,2	MHz	100: $N_{RB,c}$ = 66	100: $N_{RB,c}$ = 66
Data RBs allocated	Config 1,2		66	66
Downlink initial BWP Configuration	Config 1,2		DLBWP.0.1	
Downlink dedicated BWP Configuration	Config 1,2		DLBWP.1.1	
Uplink initial BWP configuration	Config 1,2		ULBWP.0.1	
Uplink dedicated BWP configuration	Config 1,2		ULBWP.1.1	
PDSCH Reference measurement channel	Config 1,2		SR.3.1 TDD	-
RMSI CORESET Reference Channel	Config 1,2		CR.3.1 TDD	CR.3.1 TDD
PDCCH CORESET parameters	Config 1,2		CCR.3.1 TDD	CCR.3.1 TDD
OCNG Patterns			OP.1	OP.1
SSB Configuration			SSB.1 FR2	SSB.1 FR2
SMTC Configuration	Config 1,2		SMTC.1 FR2	SMTC.1 FR2
TRS configuration	Config 1,2		TRS.2.1 TDD	TRS.2.1 TDD
TCI state	Config 1,2		TCI.State.0	TCI.State.0
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
Propagation Condition			AWGN	AWGN
Time offset to cell1 Note 2		µs	62.5	62.5+ Time offset to cell2
Time offset to cell2 Note 3		µs	-	3

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell including time alignment error between the two cells
Note 3: Receive time difference of signals received between slot timing boundary from two NR Cells including time alignment error between the two cells

Table A.5.5.2.4.1-4: NR cell specific OTA related test parameters for E-UTRAN – NR FR2 interruptions during measurements on deactivated NR SCC in asynchronous EN-DC

Parameter		Unit	Cell 2	Cell 3
Angle of arrival configuration			Setup 1 defined in clause A.3.15.1	
Assumption for UE beams Note 6			Fine	Rough
N_{oc} Note1	NR_TDD_FR2_A	dBm/15kHz	-111.7	-104.7
	NR_TDD_FR2_B			
	NR_TDD_FR2_F			
	NR_TDD_FR2_G			

	NR_TDD_FR2_T			
	NR_TDD_FR2_Y			
N_{oc} Note1	NR_TDD_FR2_A	dBm/SCS Note3	-102.7	-95.7
	NR_TDD_FR2_B			
	NR_TDD_FR2_F			
	NR_TDD_FR2_G			
	NR_TDD_FR2_T			
	NR_TDD_FR2_Y			
SSB_RP Note2	NR_TDD_FR2_A	dBm/SCS Note4	-90.7	-90.7
	NR_TDD_FR2_B			
	NR_TDD_FR2_F			
	NR_TDD_FR2_G			
	NR_TDD_FR2_T			
	NR_TDD_FR2_Y			
$\hat{E}_s / I_{ot}$		dB	12	5
$\hat{E}_s / N_{oc}$		dB	12	5
Io Note2	NR_TDD_FR2_A	dBm/95.04 MHz Note4	-61.45	-60.52
	NR_TDD_FR2_B			
	NR_TDD_FR2_F			
	NR_TDD_FR2_G			
	NR_TDD_FR2_T			
	NR_TDD_FR2_Y			

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 2: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone

Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone

Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.5.5.2.4.2 Test Requirements

The UE shall be continuously scheduled in LTE PCell and NR PSCell during the entire length of T1. During the time duration T1 the UE shall transmit at least 99.5% of ACK/NACK on NR PSCell.

If the NR PSCell is not in the same band as the deactivated SCell, the UE is only allowed to cause interruptions on NR PSCell immediately before and immediately after an SMTC. Each interruption on NR PSCell shall not exceed the value defined in Table A.5.5.2.4.2-1.

If the NR PSCell is in the same band as the deactivated SCell, the UE is only allowed to cause an interruption on PSCell no earlier than 4 slot before an SMTC and no later than 4 slot after the SMTC. the interruption on NR PSCell shall not exceed the value defined in Table A.5.5.2.4.2-2.

Table A.5.5.2.4.2-1: Interruption duration if the NR PSCell is not in the same band as the deactivated SCell

μ	NR Slot length (ms)	Interruption length (slot)
3	0.125	4

Table A.5.5.2.4.2-2: Interruption duration if the NR PSCell is in the same band as the deactivated SCell

μ	NR Slot length (ms)	Interruption length (slot)
3	0.125	8 + SMTC duration

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.2.5 E-UTRAN – NR FR2 interruptions during measurements on deactivated E-UTRAN SCC in synchronous EN-DC

A.5.5.2.5.1 Test Purpose and Environment

The purpose of this test is to verify that for NR PSCell interruptions during the measurement on the deactivated E-UTRAN SCC, the UE missed ACK/NACK does not exceed the limits. This test will verify the missed ACK/NACK rate NR PSCell in EN-DC specified in clause 8. 2.1.2. Supported test configurations are shown in table A.5.5.2.5.1-1.

The general test parameters are given in Table A.5.5.2.5.1-2, and NR cell specific test parameters are given in Table A.5.5.2.5.1-3 and A.5.5.2.5.1-4 below. The E-UTRAN cell specific test parameters can be found in Table A.3.7.2.1-2. In the test there are three cells: Cell1, Cell2 and Cell3. Cell1 and Cell3 are LTE PCell and LTE deactivated SCell, respectively, and Cell2 is NR FR2 PSCell. Cell1 shall be configured as LTE PCell and Cell2 shall be configured as NR PSCell. The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, the UE is connected to Cell1 and Cell2. The point in time at which the RRC message including *measCycleSCell* or *allowInterruptions* for the deactivated E-UTRA SCell is received by the UE, defines the start of time period T1. During T1, LTE PCell and NR PSCell are continuously scheduled in DL.

Table A.5.5.2.5.1-1: Interruption during measurements on deactivated E-UTRAN SCC supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.5.5.2.5.1-2: General test parameters for E-UTRAN – NR FR2 interruptions during measurements on deactivated E-UTRAN SCC in synchronous EN-DC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2, 3	One is NR RF channel and two are E-UTRAN RF channels
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Configured PSCell		Cell2	PSCell on NR RF channel number 2.
Configured deactivated SCell		Cell3	Deactivated SCell on E-UTRAN RF channel number 3.
CP length		Normal	Applicable to cell1, cell 2 and cell3
DRX		OFF	
Measurement gap pattern Id		OFF	
SCell measurement cycle (measCycleSCell)	ms	640	
T1	s	10	

Table A.5.5.2.5.1-3: NR cell specific test parameters for E-UTRAN – NR FR2 interruptions during measurements on deactivated E_UTRAN SCC in synchronous EN-DC

Parameter		Unit	Cell 2
Frequency Range			FR2
Duplex mode	Config 1,2		TDD
TDD configuration	Config 1,2		TDDConf.3.1
$BW_{channel}$	Config 1,2	MHz	100: $N_{RB,c}$ = 66
Data RBs allocated	Config 1,2		66
Downlink initial BWP Configuration	Config 1,2		DLBWP.0.1
Downlink dedicated BWP Configuration	Config 1,2		DLBWP.1.1
Uplink initial BWP configuration	Config 1,2		ULBWP.0.1
Uplink dedicated BWP configuration	Config 1,2		ULBWP.1.1
PDSCH Reference measurement channel	Config 1,2		SR.3.1 TDD
RMSI CORESET Reference Channel	Config 1,2		CR.3.1 TDD
PDCCH CORESET parameters	Config 1,2		CCR.3.1 TDD
OCNG Patterns			OP.1
SMTC Configuration	Config 1,2		SMTC.1 FR2
SSB Configuration	Config 1,2		SSB.1 FR2
TRS configuration	Config 1,2		TRS.2.1 TDD
TCI state	Config 1,2		TCI.State.0
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
Propagation Condition			AWGN
Time offset to cell1 Note 2		µs	3

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell including time alignment error between the two cells

Table A.5.5.2.5.1-4: NR cell specific OTA related test parameters for E-UTRAN – NR FR2 interruptions during measurements on deactivated E_UTRAN SCC in synchronous EN-DC

Parameter	Unit	Cell2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1
Assumption for UE beams Note 6		Fine
N_{oc} Note1	dBm/15kHz Note4	-112
N_{oc} Note1	dBm/SCS Note3	-102.97
$\hat{E}_s / N_{oc}$	dB	17

SSB_RP[Note2]	dBm/SCS [Note4]	-85.97
$\hat{E}_s/I_{ot}$	dB	17
Io[Note2]	dBm/95.04 MHz [Note4]	-56.90

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.5.5.2.5.2 Test Requirements

The UE shall be continuously scheduled in LTE PCell and NR PSCell during the entire length of T1. During the time duration T1 the UE shall transmit at least 99.5% of ACK/NACK on NR PSCell. The UE is only allowed to cause interruptions immediately before and immediately after an SMTC. Each interruption on NR PSCell shall not exceed the value defined in Table A.5.5.2.5.2-1.

Table A.5.5.2.5.2-1: Interruption duration if the NR PSCell is not in the same band as the deactivated SCell

μ	NR Slot length (ms)	Interruption length (slot)
3	0.125	5

Table A.5.5.2.5.2-2: Void

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.2.6 E-UTRAN – NR FR2 interruptions during measurements on deactivated E-UTRAN SCC in asynchronous EN-DC

A.5.5.2.6.1 Test Purpose and Environment

The purpose of this test is to verify that for NR PSCell interruptions during the measurement on the deactivated E-UTRAN SCC, the UE missed ACK/NACK does not exceed the limits. This test will verify the missed ACK/NACK rate for NR PSCell in EN-DC specified in clause 8. 2.1.2. Supported test configurations are shown in table A.5.5.2.6.1-1.

The general test parameters are given in Table A.5.5.2.6.1-2, and NR cell specific test parameters are given in Table A.5.5.2.6.1-3 and A.5.5.2.6.1-4 below. The E-UTRAN cell specific test parameters can be found in Table A.3.7.2.1-2. In the test there are three cells: Cell1, Cell2 and Cell3. Cell1 and Cell3 are LTE PCell and LTE deactivated SCell, respectively, and Cell2 is NR FR2 PSCell. Cell1 shall be configured as LTE PCell and Cell2 shall be configured as NR PSCell. The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, the UE is connected to Cell1 and Cell2. The point in time at which the RRC message including *measCycleSCell* or *allowInterruptions* for the deactivated E-UTRA SCell is received by the UE, defines the start of time period T1. During T1, LTE PCell and NR PSCell are continuously scheduled in DL.

Table A.5.5.2.6.1-1: Interruption during measurements on deactivated E-UTRAN SCC supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.5.5.2.6.1-2: General test parameters for E-UTRAN – NR FR2 interruptions during measurements on deactivated E_UTRAN SCC in asynchronous EN-DC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2, 3	One is NR RF channel and two are E-UTRAN RF channels
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Configured PSCell		Cell2	PSCell on NR RF channel number 2.
Configured deactivated SCell		Cell3	Deactivated SCell on E-UTRAN RF channel number 3.
CP length		Normal	Applicable to cell1, cell 2 and cell3
DRX		OFF	
Measurement gap pattern Id		OFF	
SCell measurement cycle (measCycleSCell)	ms	640	
T1	s	10	

Table A.5.5.2.6.1-3: NR cell specific test parameters for E-UTRAN – NR FR2 interruptions during measurements on deactivated E_UTRAN SCC in asynchronous EN-DC

Parameter		Unit	Cell 2
Frequency Range			FR2
Duplex mode	Config 1,2		TDD
TDD configuration	Config 1,2		TDDConf.3.1
$BW_{channel}$	Config 1,2	MHz	100: $N_{RB,c}$ = 66
Data RBs allocated	Config 1,2		66
Downlink initial BWP Configuration	Config 1,2		DLBWP.0.1
Downlink dedicated BWP Configuration	Config 1,2		DLBWP.1.1
Uplink initial BWP configuration	Config 1,2		ULBWP.0.1
Uplink dedicated BWP configuration	Config 1,2		ULBWP.1.1
PDSCH Reference measurement channel	Config 1,2		SR.3.1 TDD
RMSI CORESET Reference Channel	Config 1,2		CR.3.1 TDD
PDCCH CORESET parameters	Config 1,2		CCR.3.1 TDD
OCNG Patterns			OP.1
SMTC Configuration	Config 1,2		SMTC.1 FR2
SSB Configuration	Config 1,2		SSB.1 FR2
TRS configuration	Config 1,2		TRS.2.1 TDD
TCI state	Config 1,2		TCI.State.0
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			

EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		AWGN
Time offset to cell1 Note 2	μs	62.5
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell including time alignment error between the two cells		

Table A.5.5.2.6.1-4: NR cell specific OTA related test parameters for E-UTRAN – NR FR2 interruptions during measurements on deactivated E_UTRAN SCC in asynchronous EN-DC

Parameter	Unit	Cell2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1
Assumption for UE beams Note 6		Fine
N_{oc} Note1	dBm/15kHz Note4	-112
N_{oc} Note1	dBm/SCS Note3	-102.97
$\hat{E}_s / N_{oc}$	dB	17
SSB_RP Note2	dBm/SCS Note4	-85.97
$\hat{E}_s / I_{ot}$	dB	17
Io Note2	dBm/95.04 MHz Note4	-56.90
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation		

A.5.5.2.6.2 Test Requirements

The UE shall be continuously scheduled in LTE PCell and NR PSCell during the entire length of T1. During the time duration T1 the UE shall transmit at least 99.5% of ACK/NACK on NR PSCell. The UE is only allowed to cause interruptions immediately before and immediately after an SMTC. Each interruption on NR PSCell shall not exceed the value defined in Table A.5.5.2.6.2-1.

Table A.5.5.2.6.2-1: Interruption duration if the NR PSCell is not in the same band as the deactivated SCell

μ	NR Slot length (ms)	Interruption length (slot)

3	0.125	5

Table A.5.5.2.6.2-2: Void

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.2.7 E-UTRAN – NR FR2 interruptions at E-UTRA SRS carrier based switching

A.5.5.2.7.1 Test Purpose and Environment

The purpose of this test is to verify that when a UE needs to transmit aperiodic SRS on a PUSCH-less carrier of SCell, the UE can perform carrier based switching to one PUSCH-less SCCs from a CC with PUSCH. The test will verify the interruption requirements on active serving cell in SCG in clause 8.2.1.2.13. Supported test configurations are shown in table A.5.5.2.7.1-1.

In the test there are three cells: cell1, cell2 and cell3. Cell1 is E-UTRAN PCell on the primary component carrier. Cell3 is E-UTRAN SCell on the TDD secondary component carrier which operates in downlink without PUCCH/PUSCH. Cell2 is NR FR2 PSCell. The UE is configured with the SRS switching between E-UTRAN PCell and E-UTRAN SCell. The general test parameters and NR cell specific test parameters are given in Table A.5.5.2.8.1-2, A.5.5.2.8.1-3. And the E-UTRAN cell specific test parameters (for cell1 and cell3) can refer to Table A.3.7.2.1-1. The test consists of two successive time periods, with duration of T1 and T2, respectively. During T1 LTE PCell and NR PSCell are continuously scheduled in DL. Immediately at the beginning of T2, a PDCCH with SRS-TPC-RNTI is sent to the UE to initiate SRS switching.

Table A.5.5.2.7.1-1: E-UTRAN – NR FR2 interruptions at E-UTRA SRS carrier based switching supported test configurations

Config	Description
1	LTE FDD(cell1), LTE TDD (cell3), NR 120 kHz SSB SCS, 100 MHz bandwidth,TDD duplex mode
2	LTE TDD(cell1), LTE TDD (cell3), NR 120 kHz SSB SCS, 100 MHz bandwidth,TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.5.5.2.7.1-2: General test parameters for E-UTRAN – NR FR2 interruptions at E-UTRA SRS carrier based switching

Parameter	Unit	Value	Comment
RF Channel Number		1, 2, 3	One is NR RF channel and the other two are E-UTRAN RF channels
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Active PSCell		Cell2	PSCell on NR RF channel number 2.
Activated SCell		Cell3	SCell on E-UTRAN RF channel number 3.
CP length		Normal	Applicable to Cell1, Cell2 and Cell3
DRX		OFF	
Measurement gap pattern Id		OFF	
T1	s	0.2	
T2	s	0.2	UE shall perform SRS switching during T2

Table A.5.5.2.7.1-3: NR cell specific test parameters for E-UTRAN – NR FR2 interruptions at E-UTRA SRS carrier based switching

Parameter		Unit	Cell 2
Frequency Range			**FR2**
Duplex mode	Config 1,2		TDD
TDD configuration	Config 1,2		TDDConf.3.1

$BW_{channel}$	Config 1,2	MHz	100: $N_{RB,c}$ = 66
Downlink initial BWP Configuration	Config 1,2		DLBWP.0.1
Downlink dedicated BWP Configuration	Config 1,2		DLBWP.1.1
Uplink initial BWP configuration	Config 1,2		ULBWP.0.1
Uplink dedicated BWP configuration	Config 1,2		ULBWP.1.1
TRS configuration	Config 1,2		TRS.2.1 TDD
TCI state	Config 1,2		TCI.State.0
PDSCH Reference measurement channel	Config 1,2		SR.3.1 TDD
RMSI CORESET Reference Channel	Config 1,2		CR.3.1 TDD
RMC CORESET Reference Channel	Config 1,2		CCR.3.1 TDD
OCNG Patterns			OP.1
SSB Configuration			SSB.1 FR2
SMTC Configuration	Config 1,2		SMTC.1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
$\hat{E}_s/N_{oc}$		dB	17
Propagation Condition			AWGN
Time offset to cell1 Note 2		ms	3
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell including time alignment error between the two cells			

Table A.5.5.2.7.1-4: NR cell specific OTA related test parameters for E-UTRAN – NR FR2 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC

Parameter	Unit	Cell2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1
Assumption for UE beams Note 6		Fine
N_{oc} Note1	dBm/15kHz Note4	-112
N_{oc} Note1	dBm/SCS Note3	-102.97
$\hat{E}_s/N_{oc}$	dB	17
SS-RSRP Note2	dBm/SCS Note4	-85.97
$\hat{E}_s/I_{ot}$	dB	17
Io Note2	dBm/95.04 MHz Note4	-56.90

Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5:	As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Table A.5.5.2.7.1-5: Sounding Reference Symbol Configuration for E-UTRAN – NR FR2 interruptions at E-UTRA SRS carrier based switching

Field	Value	Comment
srsBandwidthConfiguration	bw5	
srsSubframeConfiguration	Sc8	Once every 5 subframes
ackNackSrsSimultaneousTransmission	FALSE	
srsMaxUpPTS	N/A	Not applicable for E-UTRAN FDD
srsBandwidth	0	No hopping
srsHoppingBandwidth	hbw0	
frequencyDomainPosition	0	
Duration	TRUE	Indefinite duration
Srs-ConfigurationIndex	47	SRS periodicity of 40ms.
transmissionComb	0	
cyclicShift	cs0	No cyclic shift
SRS-AntennaPort	an1	Number of antenna ports used for SRS transmission
Note: For further information see clause 6.3.2 in TS 36.331.		

A.5.5.2.7.2 Test Requirements

The UE shall be continuously scheduled in NR FR2 PSCell throughout the test. During T2 two interruption time periods are allowed on Cell2 and Cell1, each interruption due to SRS carrier based switching on Cell2 shall not exceed X defined in Table A.5.5.2.7.2-1.

Table A.5.5.2.7.2-1: Interruption length X (slot) E-UTRAN – NR at E-UTRA SRS carrier based switching

μ	NR Slot length (ms)	Interruption length X (slots)
2	0.25	5
3	0.125	9

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.2.8 E-UTRAN – NR FR2 interruptions at NR SRS carrier based switching

A.5.5.2.8.1 Test Purpose and Environment

The purpose of the test is to verify interruptions at NR SRS carrier based switching requirements defined in TS38.133 clause 8.2.1.2.12 and TS36.133 clause 7.32.2.13. The general test parameters are given in Table

A.5.5.2.8.1-2, and NR cell specific test parameters are given in Table A.5.5.2.8.1-3. And the E-UTRAN cell specific test parameters can refer to Table A.3.7.2.2-1.

In the test there are three cells: Cell1, Cell2 and Cell3. Cell1 is LTE PCell, Cell2 is NR FR2 PSCell and Cell3 is NR FR2 SCell. Cell3 is not configured with PUCCH/PUSCH transmission. The test consists of two time periods, with duration of T1 and T2, respectively. During T1 and T2, Cell1, Cell2 and Cell3 are continuously scheduled in DL. Prior to the start of the time duration T1, Cell1 shall be configured as LTE PCell, Cell2 shall be configured as NR PSCell and Cell3 shall be configured as NR SCell.

At the beginning of T2, TE shall trigger aperiodic SRS transmission on Cell3.

Table A.5.5.2.8.1-1: Interruption at transitions between active and non-active during DRX supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.5.5.2.8.1-2: General test parameters for E-UTRAN – NR FR2 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2	One is E-UTRAN RF channel and the other is NR RF channel
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Configured PSCell		Cell2	PSCell on NR RF channel number 2.
Configured SCell		Cell3	SCell on NR RF channel number 3.
CP length		Normal	Applicable to cell1 and cell 2
DRX		OFF	
Measurement gap pattern Id		OFF	
T1	s	5	
T2	s	0.1	

Table A.5.5.2.8.1-3: NR cell specific test parameters for E-UTRAN – NR FR2 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC

Parameter		Unit	Cell 2	Cell 3
Frequency Range			FR2	
Duplex mode	Config 1,2		TDD	
TDD configuration	Config 1,2		TDDConf.3.1	
$BW_{channel}$	Config 1,2	MHz	100: $N_{RB,c}$ = 66	
Downlink initial BWP Configuration	Config 1,2		DLBWP.0.1	
Downlink dedicated BWP Configuration	Config 1,2		DLBWP.1.1	
Uplink initial BWP configuration	Config 1,2		ULBWP.0.1	
Uplink dedicated BWP configuration	Config 1,2		ULBWP.1.1	
TRS configuration	Config 1,2		TRS.2.1 TDD	
SRS configuration	Config 1,2		SRS.3 TDD	
TCI state	Config 1,2		TCI.State.0	
PDSCH Reference measurement channel	Config 1,2		SR.3.1 TDD	
RMSI CORESET Reference Channel	Config 1,2		CR.3.1 TDD	

RMC CORESET Reference Channel	Config 1,2		CCR.3.1 TDD
OCNG Patterns			OP.1
SSB Configuration			SSB.1 FR2
SMTC Configuration	Config 1,2		SMTC.1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
$\hat{E}_s/N_{oc}$		dB	17
Propagation Condition			AWGN
Time offset to cell1 Note 2		µs	33

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell including time alignment error between the two cells

Table A.5.5.2.8.1-3A: OTA related test parameters

Parameter	Unit	Test 1	
		T1	T2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1	
Assumption for UE beams Note 6		Fine	
N_{oc} Note1	dBm/15kHz Note4	-112	
N_{oc} Note1	dBm/SCS Note3	-103	
$\hat{E}_s/N_{oc}$	dB	4	
SS-RSRP Note2	dBm/SCS Note4	-99	
$\hat{E}_s/I_{ot}$	dB	4	
Io Note2	dBm/95.04 MHz Note4	-68.5	

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Table A.5.5.2.8.1-4: Void

A.5.5.2.8.3 Test Requirements

In T2 UE shall transmit SRS on Cell3 as requested. During T2 interruption on Cell2 due to SRS carrier based switching from Cell2 to Cell3 shall not exceed the requirements defined in TS38.133 clause 8.2.1.2.12.
The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.3 SCell Activation and Deactivation Delay

A.5.5.3.1 SCell Activation and deactivation of SCell in FR2 intra-band

A.5.5.3.1.1 Test Purpose and Environment

The purpose of this test case is the same as for the test defined in clause A.4.5.3.1.1 except the SCell is in FR2 intra-band.

The supported test configurations are shown in table A.5.5.3.1.1-1 below. The general and cell specific test parameters are the same except those described in the following clause. The listed parameter values in Tables A.5.5.3.1.1-2 and A.5.5.3.1.1-3 will replace the values of corresponding parameters in Tables A.4.5.3.1.1-2 and A.4.5.3.1.1-3. In this case, OTA related test parameters are shown in table A.5.5.3.1.1-4 below.

In this test it is assumed that the UE is receiving RRC messages pertaining to the SCell in SCG via signaling on SRB3.

Table A.5.5.3.1.1-1: Supported test configurations for FR2 SCell activation case with FR2 PSCell

Configuration	Description
1	FDD LTE PCell, Cell 2&3 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	TDD LTE PCell, Cell 2&3 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations	

Table A.5.5.3.1.1-2: General test parameters for FR2 SCell activation case with FR2 PSCell

Parameter	Unit	Value	Comment
Active PCell		Cell 1	Primary cell on E-UTRAN RF channel number 1. As specified in clause A.3.7.2.2

Table A.5.5.3.1.1-3: Cell specific test parameters for FR2 SCell activation case with FR2 PSCell

Parameter[Note 5]	Unit	Cell 2			Cell 3		
		T1	T2	T3	T1	T2	T3
SSB ARFCN		freq1			freq2		
Duplex mode		TDD			TDD		
TDD configuration		TDDConf.3.1			TDDConf.3.1		
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66			100: $N_{RB,c}$ = 66		
Data RBs allocated		66			66		
PDSCH Reference measurement channel		SR.3.1 TDD			SR.3.1 TDD		
RMSI CORESET Reference Channel		CR.3.1 TDD			CR.3.1 TDD		
RMC CORESET Reference Channel		CCR.3.1 TDD			CCR.3.1 TDD		
DL initial BWP configuration		DLBWP.0.1					
DL dedicated BWP configuration		DLBWP.1.1					
UL initial BWP configuration		ULBWP.0.1					
UL dedicated BWP configuration		ULBWP.1.1					

OCNG Patterns		OP.1	
SMTC configuration		SMTC.1	
SSB configuration		SSB.1 FR2	
TCI state		TCI.State.0	
TRS configuration		TRS.2.1 TDD	
CSI-RS configuration for CSI reporting		CSI-RS.3.1 TDD	
reportConfigType		periodic	N/A
reportQuantity		cri-RI-PMI-CQI	N/A
CSI reporting periodicity	slot	40	N/A
CSI reporting offset	slot	4	N/A
PDSCH/PDCCH subcarrier spacing	kHz	120	
EPRE ratio of PSS to SSS	dB	0	
EPRE ratio of PBCH_DMRS to SSS			
EPRE ratio of PBCH to PBCH_DMRS			
EPRE ratio of PDCCH_DMRS to SSS			
EPRE ratio of PDCCH to PDCCH_DMRS			
EPRE ratio of PDSCH_DMRS to SSS			
EPRE ratio of PDSCH to PDSCH_DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation conditions		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: Void
Note 4: Void
Note 5: All parameters apply for configuration 1 and 2.

Table A.5.5.3.1.1-4: OTA related test parameters for FR2 SCell activation case with FR2 PSCell

Parameter Note 6	Unit	Cell 2			Cell 3		
		T1	T2	T3	T1	T2	T3
Angle of arrival configuration		Setup 1 according to A.3.15.1					
Assumption for UE beams Note 7		Rough			Rough		
N_{oc} Note1	dBm/15kHz Note4	-104.7			-104.7		
N_{oc} Note1	dBm/SCS Note 3	-95.7			-95.7		
$\hat{E}_s / N_{oc}$	dB	7			7		
SSB_RP Note2	dBm/SCS Note4	-88.7			-88.7		
$\hat{E}_s / I_{ot}$	dB	7			7		
Io Note2	dBm/95.04 MHz Note4	-58.92			-58.92		

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: Void
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: Void
Note 6: All parameters apply for configuration 1 and 2
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.5.5.3.1.2 Test Requirements

The test requirements defined in clause A.4.5.3.1.2 shall apply to this test case, with the following exceptions:

- Placement of interruptions is only verified in NR PSCell.

A.5.5.3.2 SCell Activation and deactivation of known SCell in FR1 for 160ms SCell measurement cycle

A.5.5.3.2.1 Test Purpose and Environment

The purpose of this test case is the same as for the test defined in clause A.4.5.3.1.1, except PSCell is in FR2.

The supported test configurations are shown in table A.5.5.3.2.1-1 below. The general test parameters are the same in Tables A.4.5.3.1.1-2. The cell specific test parameters are given in Tables A.5.5.3.2.1-2. In this case, OTA related test parameters are the same as in table A.5.5.3.2.1-3.

Table A.5.5.3.2.1-1: Supported test configurations for FR1 SCell activation case with PSCell is FR2

Configuration	Description
1	FDD LTE PCell, Cell 2 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Cell 3 NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	FDD LTE PCell, Cell 2 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Cell 3 NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	FDD LTE PCell, Cell 2 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Cell 3 NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	TDD LTE PCell, Cell 2 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Cell 3 NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	TDD LTE PCell, Cell 2 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Cell 3 NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	TDD LTE PCell, Cell 2 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Cell 3 NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations	

Table A.5.5.3.2.1-2: Cell specific test parameters for FR1 SCell activation case with FR2 PSCell

Parameter		Unit	Cell 2			Cell 3		
			T1	T2	T3	T1	T2	T3
SSB ARFCN			freq2			freq1		
Duplex mode	Config 1,4		TDD			FDD		
	Config 2,3,5,6		TDD			TDD		
TDD configuration	Config 1,4		TDDConf.3.1			Not Applicable		
	Config 2,5					TDDConf.1.1		
	Config 3,6					TDDConf.2.1		
$BW_{channel}$	Config 1,4	MHz	100: $N_{RB,c}$ = 66			10: $N_{RB,c}$ = 52		
	Config 2,5					10: $N_{RB,c}$ = 52		
	Config 3,6					40: $N_{RB,c}$ = 106		
Data RBs allocated	Config 1,4		66			52		
	Config 2,5					52		
	Config 3,6					106		
DL initial BWP configuration	Config 1,2,3,4,5,6		DLBWP.0.1					
DL dedicated BWP configuration	Config 1,2,3,4,5,6		DLBWP.1.1					
UL initial BWP configuration	Config 1,2,3,4,5,6		ULBWP.0.1					
UL dedicated BWP configuration	Config 1,2,3,4,5,6		ULBWP.1.1					
DRX Cycle		ms	Not Applicable					

PDSCH Reference measurement channel	Config 1,4		SR.3.1 TDD	SR.1.1 FDD
	Config 2,5			SR.1.1 TDD
	Config 3,6			SR.2.1 TDD
RMSI CORESET Reference Channel	Config 1,4		CR.3.1 TDD	CR.1.1 FDD
	Config 2,5			CR.1.1 TDD
	Config 3,6			CR.2.1 TDD
RMC CORESET Reference Channel	Config 1,4		CCR.3.1 TDD	CCR.1.1 FDD
	Config 2,5			CCR.1.1 TDD
	Config 3,6			CCR.2.1 TDD
OCNG Patterns			OP.1	
SMTC configuration			SMTC.1	
TCI state			TCI.State.0	NA
TRS configuration	Config 1,4		TRS.2.1 TDD	TRS.1.1 FDD
	Config 2,5			TRS.1.1 TDD
	Config 3,6			TRS.1.2 TDD
SSB configuration	Config 1,2,4,5		SSB.1 FR2	SSB.1 FR1
	Config 3,6			SSB.2 FR1
CSI-RS configuration for CSI reporting	Config 1,4		CSI-RS.3.1 TDD	CSI-RS.1.1 FDD
	Config 2,5			CSI-RS.1.1 TDD
	Config 3,6			CSI-RS.2.1 TDD
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	120kHz	15kHz
	Config 3,6			30kHz
reportConfigType	Config 1-6		periodic	N/A
reportQuantity	Config 1-6		cri-RI-PMI-CQI	N/A
CSI reporting periodicity	Config 1,2,3,4,5,6	slot	40	N/A
CSI reporting offset	Config 1,2,3,4,5,6	slot	4	N/A
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
Propagation condition			AWGN	NA Link only, see clause A.3.7A

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: Void
Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.]

Table A.5.5.3.2.1-3: OTA related test parameters for FR1 SCell activation case with FR2 PSCell

Parameter		Unit	Cell 2			Cell 3		
			T1	T2	T3	T1	T2	T3
Angle of arrival configuration			Setup 1 according to clause A.3.15.1			NA Link only, see clause A.3.7A		
Assumption for UE beams[Note 7]			Rough					
N_{oc} [Note1]		dBm/15kHz	-104.7					
N_{oc} [Note1]	Config 1,2,4,5	dBm/SCS	-95.7					
	Config 3,6							
SSB_RP[Note2]	Config 1,2,4,5	dBm/SCS [Note3]	-88.7					
	Config 3,6							

$\hat{E}_s / N_{oc}$	Config 1,2,3,4,5,6	dB	7	
$\hat{E}_s / I_{ot}$		dB	7	
Io Note2	Config 1,2,4,5	dBm/ChBw Note4,Note6	-58.92	
	Config 3,6			

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 2: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 3: Void

Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone

Note 5: Void

Note 6: ChBW is 94.04 MHz for Cell2, 9.36 MHz for Cell 3 in configurations 1,2,4,5, 38.1 MHz in configurations 3,6

Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.5.5.3.2.2 Test Requirements

The test requirements defined in clause A.4.5.3.1.2 shall apply to this test case.

A.5.5.3.3 Void

A.5.5.3.4 Void

A.5.5.3.5 SCell Activation and deactivation of SCell in FR2

A.5.5.3.5.1 Test Purpose and Environment

The purpose of this test is to verify that the SCell activation and deactivation times are within the requirements stated in clause 8.3, when the SCell is in FR2.

The supported test configurations are shown in table A.5.5.3.5.1-1 below. The test parameters are the same as in clause A.4.5.3.3.1 except those described in the following clause. The listed parameter values in Tables A.5.5.3.5.1-2 will replace the values of corresponding parameters in Tables A.4.5.3.3.1-2. The listed parameter values in Tables A.5.5.3.5.1-3 will replace the values of corresponding parameters in Tables A.4.5.3.3.1-3. In this case, OTA related test parameters are shown in table A.5.5.3.5.1-4 below.

The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are three carriers, E-UTRA has one cell (Cell 1), NR has two cells, PSCell (Cell 2) in FR1 and SCell (Cell 3) in FR2. Cell 1 and Cell 2 have constant signal levels throughout the test. Before the test starts the UE is connected to Cell 1 (PCell) on E-UTRAN and Cell 2 (PSCell) on NR, but is not aware of Cell 3 (SCell) on NR. The UE is monitoring the PCell and PSCell. The UE shall be continuously scheduled in the PCell and PSCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 3) becomes configured on NR. During T1 the SCell is powered off and UE is not aware of SCell.

A MAC message for activation of SCell is sent by the test equipment 100ms after the RRC message, in a slot # denoted m. The point in time at which the MAC message for activation of SCell is received at the UE antenna connector defines the start of time period T2.

During T2, the test equipment monitors the L1-RSRP measurement reporting for the SCell. The time when test equipment receives a valid L1-RSRP report is denoted as slot $m+T_{L1\text{-}RSRP}$. In the next DL slot after slot $m+T_{L1\text{-}RSRP}$, the test equipment sends a MAC message for the activation of the TCI state of the RMC CORESET of the SCell. In the same slot, the test equipment also sends an RRC message to configure the CSI-RS resources for SCell.

Time period T3 starts when a MAC message for deactivation of the SCell, sent from the test equipment to the UE in a slot # denoted n, is received at the UE antenna connector.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell and PSCell during activation of SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The test equipment verifies the deactivation time by counting the slots from the time when the SCell1 deactivation command is sent until CSI reporting for SCell1 is discontinued.

Table A.5.5.3.5.1-1: FR2 SCell activation in non-DRX test configurations with FR1 PSCell

Configuration	Description
1	LTE FDD PCell, Cell 2 NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Cell 3 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE FDD PCell, Cell 2 NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Cell 3 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
3	LTE FDD PCell, Cell 2 NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Cell 3 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
4	LTE TDD PCell, Cell 2 NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Cell 3 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
5	LTE TDD PCell, Cell 2 NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Cell 3 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
6	LTE TDD PCell, Cell 2 NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Cell 3 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.5.5.3.5.1-2: General test parameters for FR2 SCell activation case with FR1 PSCell

Parameter	Unit	Value	Comment
Active PCell		Cell 1	Primary cell on E-UTRAN RF channel number 1. As specified in clause A.3.7.2.2
T2	s	2	During this time the UE shall activate the SCell.

Table A.5.5.3.5.1-3: Cell specific test parameters for FR2 SCell activation case with FR1 PSCell

Parameter		Unit	Cell 2			Cell 3		
			T1	T2	T3	T1	T2	T3
SSB ARFCN			freq1			freq2		
Duplex mode	Config 1,4		FDD			TDD		
	Config 2,3,5,6		TDD			TDD		
TDD configuration	Config 1,4		Not Applicable			TDDConf.3.1		
	Config 2,5		TDDConf.1.1					
	Config 3,6		TDDConf.2.1					
$BW_{channel}$	Config 1,4	MHz	10: $N_{RB,c}$ = 52			100: $N_{RB,c}$ = 66		
	Config 2,5		10: $N_{RB,c}$ = 52					
	Config 3,6		40: $N_{RB,c}$ = 106					
Data RBs allocated	Config 1,4		52			66		
	Config 2,5		52					
	Config 3,6		106					
BWP BW	Config 1,4		10: $N_{RB,c}$ = 52			100: $N_{RB,c}$ = 66		

	Config 2,5		10: $N_{RB,c}$ = 52	
	Config 3,6		40: $N_{RB,c}$ = 106	
DRx Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	SR.3.1 TDD
	Config 2,5		SR.1.1 TDD	
	Config 3,6		SR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	CR.3.1 TDD
	Config 2,5		CR.1.1 TDD	
	Config 3,6		CR.2.1 TDD	
RMC CORESET Reference Channel	Config 1,4		CCR.1.1 FDD	CCR.3.1 TDD
	Config 2,5		CCR.1.1 TDD	
	Config 3,6		CCR.2.1 TDD	
OCNG Patterns			OP.1	
SMTC configuration			SMTC.1	
TCI state			NA	TCI.State.0
TRS configuration	Config 1,4		TRS.2.1 TDD	TRS.2.1 TDD
	Config 2,5		TRS.1.1 TDD	
	Config 3,6		TRS.1.2 TDD	
SSB configuration	Config 1,2,4,5		SSB.1 FR1	SSB.1 FR2
	Config 3,6		SSB.2 FR1	
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15 kHz	120 kHz
	Config 3,6		30 kHz	
CSI-RS configuration	Config 1~6		NA	NA / CSI-RS.3.1 TDD Note 5
reportConfigType	Config 1~6		periodic	NA
reportQuantity	Config 1~6		cri-RI-PMI-CQI	NA
CSI reporting periodicity Note 6	Config 1~6	slot	40	NA
CSI reporting offset	Config 1~6	slot	4	NA
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
Propagation condition		-	N/A Link only, see clause A.3.7A	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: Void
Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.
Note 5: CSI-RS for CSI measurement is (re)configured in the next DL slot after slot m+$T_{L1\text{-}RSRP}$ during T2.
Note 6: L1-RSRP measurement and reporting are configured to the the UE prior to the start of time period T1.

Table A.5.5.3.5.1-4: OTA related test parameters for FR2 SCell activation case with FR1 PSCell

Parameter	Unit	Cell 2			Cell 3		
		T1	T2	T3	T1	T2	T3
Angle of arrival configuration		NA			Setup 1 according to clause A.3.15.1		
Assumption for UE beams Note 7		NA			Rough		

N_{oc} Note1		dBm/15kHz	Link only, see clause A.3.7A	-104.7		
N_{oc} Note1	Config 1,2,4,5	dBm/SCS		-95.7		
	Config 3,6					
SSB_RP Note2	Config 1,2,4,5	dBm/SCS Note3		-∞	-88.7	-88.7
	Config 3,6					
$\hat{E}_s/N_{oc}$	Config 1,2,3,4,5,6	dB		-∞	7	7
$\hat{E}_s/I_{ot}$		dB		-∞	7	7
Io Note2, Note 4	Config 1,2,4,5	dBm/95.04 MHz		-66.68	-58.92	-58.92
	Config 3,6					

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 2: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 3: Void

Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone

Note 5: Void

Note 6: Void

Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.

A.5.5.3.5.2 Test Requirements

During T2 the UE shall send the first CSI report for SCell in the first available uplink resource after slot (m+k). UE is allowed to postpone CSI report to next available UL resource if an available uplink resource is subject to interruption. Whether CSI report in a slot was interrupted is checked by monitoring ACK/NACK sent in PSCell in the slot.

During T2 the UE shall start sending valid L1-RSRP report for the SCell in the configured slots for CSI reporting after slot (m+$T_{L1\text{-}RSRP}$), where $T_{L1\text{-}RSRP}$ is no larger than

3ms + $T_{FirstSSB_MAX}$ + 15*T_{SMTC_MAX} + 8*T_{rs} + $T_{L1\text{-}RSRP,\ measure}$ + $T_{L1\text{-}RSRP,\ report}$

as defined in clause 8.3.2. For this test case, $T_{FirstSSB_MAX}$=T_{SMTC_MAX}=T_{rs}=20ms; $T_{L1\text{-}RSRP,\ measure}$=480ms and $T_{L1\text{-}RSRP,\ measure}$=5ms, which allows $T_{L1\text{-}RSRP}$ 1000ms.

During T2 the UE shall start sending CSI reports for the SCell with non-zero CQI index in the configured slots for CSI reporting no later than slot m + $\frac{T_{HARQ} + T_{activtion_time} + T_{CSI_Reporting}}{NR\ slot\ length}$, where

- T_{HARQ} is defined in Table A.5.5.3.1.1-2

- $T_{activation_time}$ = 3ms + $T_{FirstSSB_MAX}$ + 15*T_{SMTC_MAX} + 8*T_{rs} + $T_{L1\text{-}RSRP,\ measure}$ + $T_{L1\text{-}RSRP,\ report}$ + max {(T_{HARQ} + $T_{uncertainty_MAC}$ + 5ms + $T_{FineTiming}$), ($T_{uncertainty_RRC}$ + T_{RRC_delay})}, which allows 1030ms

- $T_{CSI_Reporting}$ = 10ms

- NR slot length is 0.125ms for this test case.

During T3 the UE shall stop sending CSI reports for both SCells no later than slot n + $\frac{T_{HARQ} + 3ms}{NR\ slot\ length}$, as defined in clause 8.3.

During T2 interruption of PSCell during SCell activation shall not happen outside the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $m + 1 + \frac{T_{\text{HARQ}} + 3\text{ms} + T_X}{\text{NR slot length}}$, and interruption of E-UTRA PCell during SCell activation shall not happen outside the subframe $m_1 + 1 + \frac{T_{\text{HARQ}}}{\text{EUTRA slot length}}$ to subframe $m_2 + 1 + \frac{T_{\text{HARQ}} + 3\text{ms} + T_X}{\text{EUTRA slot length}}$, as defined in clause 8.3, where T_X =20ms, and m_1 and m_2 are the index of the first and last subframe of E-UTRA PCell which overlaps with slot m.

During T3 the starting point of interruption of PSCell during SCell deactivation shall not happen outside the slot $n + 1 + \frac{T_{\text{HARQ}}}{NR\ slot\ length}$ to $n + 1 + \frac{T_{\text{HARQ}} + 3\text{ms}}{NR\ slot\ length}$, as defined in clause 8.3 and the starting point of interruption of E-UTRA PCell during SCell deactivation shall not happen outside the subframe $n_1 + 1 + \frac{T_{\text{HARQ}}}{EUTRA\ subframe\ length}$ to subframe $n_2 + 1 + \frac{T_{\text{HARQ}} + 3\text{ms}}{EUTRA\ subframe\ length}$, where n_1 and n_2 are the index of the first and last subframe of E-UTRA PCell which overlaps with slot n.

The interruption of PSCell due to activation of SCell1 and SCell2 shall not be more than the values specified for EN-DC in Clause 8.2.1.2.10.

The interruption of PCell due to activation of SCell1 and SCell2 shall not be more than the values specified for EN-DC in Clause 7.32.2.5 of TS 36.133 [50].

A.5.5.3.6 Multiple SCell Activation and deactivation of one unknown SCell and one known SCell in FR2

A.5.5.3.6.1 Test Purpose and Environment

The purpose of this test is to verify that the multiple SCell activation and deactivation delay and interruption are within the requirements stated in clause 8.3, when the two SCells to be activated are in FR2 and one SCell is known and the other SCell is unknown by the UE at the time of activation.

The supported test configurations are shown in Table A.5.5.3.6.1-1 below. The general test parameters are given in Table A.5.5.3.6.1-2 and cell-specific test parameters in Table A.5.5.3.6.1-3 below. OTA related test parameters are shown in table A.5.5.3.6.1-4.

The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are four carriers, one E-UTRA cell, and three NR cells. Before the test starts the UE is connected to Cell 1 (PCell) on the E-UTRA carrier and Cell 2 (PSCell) on the NR carrier in FR1, but is not aware of Cell 3 (SCell1) or Cell 4 (SCell2) on the NR carriers both in FR2. Cell 1, Cell 2 and Cell 3 have constant signal levels throughout the test. The UE is monitoring the PCell and PSCell. The UE shall be continuously scheduled in the PCell and PSCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the Cell 3 (SCell1) and Cell 4 (SCell2) are configured on NR. The test equipment sends a single MAC message for activation of both SCells within 3s for UE power class 2/3/4 or 4s for UE power class 1 after RRM reports is sent for SCell1.

The point in time at which the MAC message is received at the UE antenna connector, in a slot # denoted m, defines the start of time period T2. In the same MAC PDU, the test equipment activates the TCI state of RMC CORESET. In slot #m, the test equipment also sends an RRC message to configure the CSI-RS resources for SCell1 and SCell2.

Time period T3 starts when a MAC message for deactivation of SCell, sent from the test equipment to the UE in a slot # denoted n, is received at the UE antenna connector.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The test equipment verifies the deactivation time by counting the slots from the time when the SCell deactivation command is sent until CSI reporting for SCell is discontinued.

Table A.5.5.3.6.1-1: Supported test configurations

Configuration	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.5.5.3.6.1-2: General test parameters

Parameter	Unit	Value	Comment
RF Channel Number		1,2,3,4	One E-UTRAN radio channel (1) and three NR radio channels (2,3,4) are used for this test
Active PCell		Cell 1	Primary cell on E-UTRAN RF channel number 1. As specified in clause A.3.7.2.2
Active PSCell		Cell 2	Primary secondary cell on NR RF channel number 2 in FR1.
Configured deactivated SCells		Cell 3, Cell 4	Configured deactivated secondary cell on NR RF channel number 3 and RF channel number 4, both in FR2
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
SCell measurement cycle (measCycleSCell)	ms	160	For both Cell 3 and Cell 4
T1	s	7	During this time the PSCell shall be known and the SCells configured, SCell1 detected but SCell2 not detected.
T2	s	1	During this time the UE shall activate the SCell.
T3	s	1	During this time the UE shall deactivate the SCell.
T_{HARQ}	ms	k_1×NR slot length	k_1 is a number of slots indicated by the PDSCH-to-HARQ_feedback timing indicator field in a corresponding DCI format or provided by *dl-DataToUL-ACK* if the PDSCH-to-HARQ feedback timing field is not present in the DCI format, the value is defined in 38.213 [3]
k	slot	$k_1 + 3 \cdot N_{\text{slot}}^{\text{subframe},\ \mu} + 1$	As specified in clause 4.3 of TS 38.213 [3]

Table A. 5.5.3.6.1-3: Cell specific test parameters

Parameter		Unit	Cell 2			Cell 3			Cell 4		
			T1	T2	T3	T1	T2	T3	T1	T2	T3
SSB ARFCN			**freq1**			**freq2**			**freq3**		
Duplex mode	Config 1,2		TDD								
TDD configuration	Config 1,2		TDDConf.3.1								
$BW_{channel}$	Config 1,2	MHz	100: $N_{RB,c}$ = 66								
DL initial BWP configuration	Config 1,2		DLBWP.0.1								
DL dedicated BWP configuration	Config 1,2		DLBWP.1.1								
UL initial BWP configuration	Config 1,2		ULBWP.0.1								

UL dedicated BWP configuration	Config 1,2		ULBWP.1.1				
Timing offset to Cell 2		ms	Not Applicable	0		0	
PDSCH Reference measurement channel	Config 1,2		SR.3.1 TDD	SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET Reference Channel	Config 1,2		CR.3.1 TDD	CR.3.1 TDD		CR.3.1 TDD	
RMC CORESET Reference Channel	Config 1,2		CCR.3.1 TDD	CCR.3.1 TDD		CCR.3.1 TDD	
TRS configuration	Config 1,2		TRS.2.1 TDD	TRS.2.1 TDD		TRS.2.1 TDD	
CSI-RS configuration	Config 1,2		CSI-RS.3.1 TDD	N/A	CSI-RS.3.1 TDD	N/A	CSI-RS.3.1 TDD
CSI reporting periodicity	Config 1,2	ms	5	5		5	
OCNG Patterns			OP.1				
SMTC configuration			SMTC.1				
SSB configuration	Config 1,2		SSB.1 FR2	SSB.1 FR2		N/A	SSB.1 FR2
EPRE ratio of PSS to SSS		dB	0				
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
Propagation condition		-	AWGN				
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							

Table A.5.5.3.6.1-4: OTA related test parameters

Parameter[Note 6]	Unit	Cell 3			Cell 4		
		T1	T2	T3	T1	T2	T3
Angle of arrival configuration		Setup 1 according to A.3.15.1					
Assumption for UE beams[Note 7]		Rough			Rough		
N_{oc} [Note1]	dBm/15kHz[Note4]	-112			-112		
N_{oc} [Note1]	dBm/SCS[Note 3]	-102.97			-102.97		
$\hat{E}_s / N_{oc}$	dB	14			N/A	14	14
SS-RSRP[Note2]	dBm/SCS [Note4]	-88.97			N/A	-88.97	-88.97
$\hat{E}_s / I_{ot}$	dB	14			N/A	14	14
Io[Note2]	dBm/95.04 MHz [Note4]	-59.81			-73.98	-59.81	-59.81

Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5:	As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6:	All parameters apply for configuration 1 and 2
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.5.5.3.6.2 Test Requirements

During T2 the UE shall send the first CSI report for SCell in the first available uplink resource after slot (m+k). UE is allowed to postpone CSI report to next available UL resource if an available uplink resource is subject to interruption. Whether CSI report in a slot was interrupted is checked by monitoring ACK/NACK sent in PSCell in the slot.

During T2 the UE shall start sending CSI reports for SCell1 and SCell2 with non-zero CQI index in the configured slots for CSI reporting no later than slot m + $\frac{T_{HARQ}+T_{activtion_time}+T_{CSI_Reporting}}{NR\ slot\ length}$, where

- T_{HARQ} is defined in Table A.5.5.3.Y.1-2

- $T_{activation_time}$ = 5ms + $T_{FineTiming}$ = 25ms,

- $T_{CSI_Reporting}$ = 10ms

- NR slot length is 0.125ms.

During T3 the UE shall stop sending CSI reports for both SCells no later than slot n + $\frac{T_{HARQ}+3ms}{NR\ slot\ length}$, as defined in clause 8.3.

All of the above test requirements shall be fulfilled in order for the observed SCell activation delay to be counted as correct. The rate of correct observed SCell activation delay and SCell deactivation delay during repeated tests shall be at least 90%.

NOTE: During T2 if there are no uplink resources for reporting the valid CSI in a slot m + $\frac{T_{HARQ}+T_{activtion_time}+T_{CSI_Reporting}}{NR\ slot\ length}$ as defined in clause 8.3 then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

A.5.5.3.7 Direct SCell activation at SCell addition of known SCell in FR2

A.5.5.3.7.1 Test Purpose and Environment

The purpose of this test case is the same as for the test defined in clause A.4.5.3.5 except the SCell is in FR2 intra-band.

The supported test configurations are shown in table A.5.5.3.7.1-1 below. The general and cell specific test parameters are the same except those described in the following clause. The listed parameter values in Tables A.5.5.3.7.1-2 and A.5.5.3.7.1-3 will replace the values of corresponding parameters in Tables A.4.5.3.5.1-2 and A.4.5.3.5.1-3. In this case, OTA related test parameters are shown in table A.5.5.3.7.1-4 below.

The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are three carriers, each with one cell. Cell 1 operates in either FDD or TDD duplex mode according to test configuration. Cell 2 and Cell 3 operate in TDD duplex mode. All cells have constant signal levels throughout the test. Before the test starts the UE is connected to Cell 1 (PCell) on radio channel 1 (PCC) and Cell 2 (PSCell) on radio channel 2 (PSCC), but is not aware of Cell 3 (SCell1) on radio channel 3 (SCC). The UE is only monitoring the PCC/PSCC. The UE shall be continuously scheduled in the PCell/PSCell throughout the whole test.

At the beginning of T1, the UE is configured to measure radio channel 3 and starts detecting the Cell 3 (SCell) on radio channel 3 (SCC). During T1 Cell 3 is detected and measured and measurement report is sent by the UE to the test equipment.

Time period T2 starts when test equipment sends the RRCConnectionReconfiguration message for the activation of the SCell within time period specified in clause 8.3.2 for known cell definition to ensure the configured SCell is known.The NR shall be use an *RRCConnectionReconfigurationComplete* message with parameter *sCellState* set to *activated*for the SCell (Cell 3), which causes the SCell to become configured and activated on radio channel 3 (SCC). The message is sent from the test equipment to the UE and is received in a subframe # denoted m at the UE antenna connector. The UE shall accomplish the activation of the SCell no later than subframe (m+ N_{direct}).

Time period T3 starts at (m+ N_{direct}), at which point UE shall be reporting a valid CQI for PCell/PSCell and SCell.

During T3, the UE shall be continuously scheduled in the SCell.

The test equipment verifies the activation time by counting the subframes from the time when the direct SCell activation is sent and until a CSI report with other than CQI index 0 is received.

The test equipment verifies the CSI report from the direct activated SCell after the activation procedure is completed contains CQI index other than 0.

Table A.5.5.3.7.1-1: Supported test configurations for FR2 SCell activation case with FR2 PSCell

Configuration	Description
1	FDD LTE PCell, Cell 2&3 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	TDD LTE PCell, Cell 2&3 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations	

Table A.5.5.3.7.1-2: General test parameters for FR2 SCell activation case with FR2 PSCell

Parameter	Unit	Value	Comment
RF Channel Number		1, 2, 3	Two radio channels are used for this test. One for E-UTRA cell and two for NR Cell
Active PCell		Cell1	PCell on RF channel number 1. As specified in clause A.3.7.2.2
Active PSCell		Cell2	PSCell on RF channel number 2.
Deconfigured deactivated SCell		Cell3	Deconfigured deactivated secondary cell on RF channel number 3
DRX		OFF	Continuous monitoring of PCell/PSCell
PRACH configuration on cell2		FR2 configuration 2	Captured in A.3.8.3.2
PSCell CQI/PMI periodicity and offset configuration index		slot5	CQI reporting for PSCell every uplink slot
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on carrier frequency of cell1.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on carrier frequency of cell2.
Cell-individual offset for cells on RF channel number 3	dB	0	Individual offset for cells on carrier frequency of cell3.

T1	s	7	During this time the PCell/PSCell shall be known and cell3 is detected, and UE shall report a valid CQI for PCell/PSCell.
T2	s	N_{direct}	During this time the UE shall be configured with directly activated SCell1.
T3	s	1	During this time the UE shall report a valid CQI for PCell/PSCell and SCell.

Table A.5.5.3.7.1-3: Cell specific test parameters for FR2 SCell activation case with FR2 PSCell

Parameter[Note 5]	Unit	Cell 2			Cell 3		
		T1	T2	T3	T1	T2	T3
SSB ARFCN		freq1			freq2		
Duplex mode		TDD			TDD		
TDD configuration		TDDConf.3.1			TDDConf.3.1		
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66			100: $N_{RB,c}$ = 66		
PDSCH Reference measurement channel		SR.3.1 TDD			SR.3.1 TDD		
RMSI CORESET Reference Channel		CR.3.1 TDD			CR.3.1 TDD		
RMC CORESET Reference Channel		CCR.3.1 TDD			CCR.3.1 TDD		
DL initial BWP configuration		DLBWP.0.1					
DL dedicated BWP configuration		DLBWP.1.1					
UL initial BWP configuration		ULBWP.0.1					
UL dedicated BWP configuration		ULBWP.1.1					
OCNG Patterns		OP.1					
SMTC configuration		SMTC.1					
SSB configuration		SSB.1 FR2					
TCI state		TCI.State.0					
TRS configuration		TRS.2.1 TDD					
CSI-RS configuration for CSI reporting		CSI-RS.3.1 TDD					
reportConfigType		periodic			N/A		
reportQuantity		cri-RI-PMI-CQI			N/A		
CSI reporting periodicity	slot	40			N/A		
CSI reporting offset	slot	4			N/A		
PDSCH/PDCCH subcarrier spacing	kHz	120					
EPRE ratio of PSS to SSS	dB	0					
EPRE ratio of PBCH_DMRS to SSS							
EPRE ratio of PBCH to PBCH_DMRS							
EPRE ratio of PDCCH_DMRS to SSS							
EPRE ratio of PDCCH to PDCCH_DMRS							
EPRE ratio of PDSCH_DMRS to SSS							
EPRE ratio of PDSCH to PDSCH_DMRS							
EPRE ratio of OCNG DMRS to SSS[Note 1]							
EPRE ratio of OCNG to OCNG DMRS [Note 1]							
Propagation conditions		AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: All parameters apply for configuration 1 and 2.

Table A.5.5.3.7.1-4: OTA related test parameters for FR2 SCell activation case with FR2 PSCell

Parameter[Note 6]	Unit	Cell 2	Cell 3

		T1	T2	T3	T1	T2	T3
Angle of arrival configuration		Setup 1 according to A.3.15.1					
Assumption for UE beams Note 7		Rough			Rough		
N_{oc} Note1	dBm/15kHz Note4	-104.7			-104.7		
N_{oc} Note1	dBm/SCS Note 3	-95.7			-95.7		
$\hat{E}_s / N_{oc}$	dB	7			7		
SS-RSRP Note2	dBm/SCS Note4	-88.7			-88.7		
$\hat{E}_s / I_{ot}$	dB	7			7		
Io Note2	dBm/95.04 MHz Note4	-58.92			-58.92		

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6: All parameters apply for configuration 1 and 2
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.5.5.3.7.2 Test Requirements

The UE shall accomplish the activation of the SCell no later than subframe m+N_{direct} as defined in clause 8.3.4.

Time period T3 starts at (m+ N_{direct}), at which point UE shall be reporting a valid CQI for both PSCell and SCell.

During T3 the UE shall send CSI reports for SCell with non-zero CQI index and continue to send CSI reports for SCell 1 with non-zero CQI index until the end of T3. All of the above test requirements shall be fulfilled in order for the observed SCell1 direct activation delay to be counted as correct. The rate of correct observed SCell1 direct activation delay during repeated tests shall be at least 90%.

A.5.5.3.8 Fast SCell Activation of SCell in FR2 intra-band

A.5.5.3.8.1 Test Purpose and Environment

The purpose of this test is to verify that the fast SCell activation and deactivation times are within the requirements stated in clause 8.3.16, when the SCell in FR2 is known by the UE at the time of activation.

The supported test configurations are shown in table A.5.5.3.8-1 below. The test parameters are given in Tables A.5.5.3.8-2 and cell-specific parameters in A.5.5.3.8-3 below. The test consists of two successive time periods, with duration of T1 and T2, respectively. There are three carriers, E-UTRA has one cell, NR has two cells. All cells have constant signal levels throughout the test. Before the test starts the UE is connected to Cell 1 (PCell) on E-UTRA and Cell 2 (PSCell) on NR, but is not aware of Cell 3 (SCell) on NR. The UE is monitoring the PCell and PSCell. The UE shall be continuously scheduled in the PCell and PSCell throughout the whole test. In this case, OTA related test parameters are shown in table A.5.5.3.8.1-4 below.

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 3) becomes configured on NR. The UE now starts monitoring the SCell. The test equipment sends a MAC message for activation of the SCell and triggering the aperiodic CSI-RS for fast SCell activation.

The point in time at which the MAC message is received at the UE antenna connector, in a slot # denoted m (where m mode 20=1), defines the start of time period T2. The UE shall be able to report valid CSI in PSCell for the activated SCell at latest in slot m + $\frac{T_{\text{HARQ}}+T_{\text{activation_time}}+T_{\text{CSI_Reporting}}}{\text{NR slot length}}$, as defined in clause 8.3.16. The UE shall start reporting CSI in PSCell after at least one CSI-RS transmission occasion for channel measurement and reporting after slot (m+k) and shall report CQI index 0 (out-of-range) until the SCell activation has been completed. Any PSCell interruption due to activation of SCell shall occur in the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to slot $m + 1 + \frac{T_{\text{HARQ}}+3\text{ms}+T_{\text{X}}}{\text{NR slot length}} + N_{\text{interruption}}$, as defined in clause 8.3, where $N_{\text{interruption}}$ is the interruption length given in clause 8.2.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PSCell during activation and deactivation of SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received.

Table A.5.5.3.8.1-1: Supported test configurations for FR2 SCell activation case with FR2 PSCell

Configuration	Description
1	FDD LTE PCell, Cell 2&3 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	TDD LTE PCell, Cell 2&3 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations	

Table A.5.5.3.8.1-2: General test parameters for FR2 SCell activation case with FR2 PSCell

Parameter	Unit	Value	Comment
RF Channel Number		1,2,3	One E-UTRAN radio channel (1) and two NR radio channel (2,3) are used for this test
Active PCell		Cell 1	Primary cell on E-UTRAN RF channel number 1. As specified in clause A.3.7.2.2
Active PSCell		Cell 2	Primary secondary cell on NR RF channel number 2.
Configured deactivated SCell		Cell 3	Configured deactivated secondary cell on NR RF channel number 3
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
Cell-individual offset for cells on E-UTRA RF channel number	dB	0	Individual offset for cells on primary component carrier.
Cell-individual offset for cells on NR channel number	dB	0	Individual offset for cells on secondary component carrier.
Cell3 timing offset to cell2	µs	0	
Time alignment error between cell3 and cell2	µs	≤ Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
T1	s	7	During this time the PSCell shall be known and the SCell configured and detected.
T2	s	1	During this time the UE shall activate the SCell.

T_{HARQ}	ms	k_1NR slot length	k_1 is a number of slots indicated by the PDSCH-to-HARQ_feedback timing indicator field in a corresponding DCI format or provided by *dl-DataToUL-ACK* if the PDSCH-to-HARQ feedback timing field is not present in the DCI format, the value is defined in 38.213 [3]
$T_{CSI_Reporting}$	ms	15	the delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting (clause 5.2.2.5 in TS 38.214) and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2]
k	slot	$k_1 + 3 \cdot N_{\text{slot}}^{\text{subframe},\,\mu} + 1$	As specified in clause 4.3 of TS 38.213 [3]

Table A.5.5.3.8.1-3: Cell specific test parameters for FR2 SCell activation case with FR2 PSCell

Parameter[Note 5]	Unit	Cell 2		Cell 3	
		T1	T2	T1	T2
SSB ARFCN		freq1		freq2	
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		66		66	
PDSCH Reference measurement channel		SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET Reference Channel		CR.3.1 TDD		CR.3.1 TDD	
RMC CORESET Reference Channel		CCR.3.1 TDD		CCR.3.1 TDD	
DL initial BWP configuration		DLBWP.0.1			
DL dedicated BWP configuration		DLBWP.1.1			
UL initial BWP configuration		ULBWP.0.1			
UL dedicated BWP configuration		ULBWP.1.1			
OCNG Patterns		OP.1			
SMTC configuration		SMTC.1			
SSB configuration		SSB.1 FR2			
Aperiodic CSI-RS for Scell activation		-		TRS.2.3	
gapBetweenBursts	slots	N/A			
TCI state		TCI.State.0			
TRS configuration		TRS.2.1 TDD			
CSI-RS configuration for CSI reporting		CSI-RS.3.1 TDD			
reportConfigType		periodic		N/A	
reportQuantity		cri-RI-PMI-CQI		N/A	
CSI reporting periodicity	slot	40		N/A	
CSI reporting offset	slot	4		N/A	
PDSCH/PDCCH subcarrier spacing	kHz	120			
EPRE ratio of PSS to SSS	dB	0			
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					

EPRE ratio of PDSCH to PDSCH_DMRS		
EPRE ratio of OCNG DMRS to SSS Note 1		
EPRE ratio of OCNG to OCNG DMRS Note 1		
Propagation conditions		AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: Void
Note 4: Void
Note 5: All parameters apply for configuration 1 and 2.

Table A.5.5.3.8.1-4: OTA related test parameters for FR2 SCell activation case with FR2 PSCell

Parameter Note 6	Unit	Cell 2		Cell 3	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 1 according to A.3.15.1			
Assumption for UE beams Note 7		Rough		Rough	
N_{oc} Note1	dBm/15kHz Note4	-104.7		-104.7	
N_{oc} Note1	dBm/SCS Note3	-95.7		-95.7	
$\hat{E}_s / N_{oc}$	dB	7		7	
SS_RP Note2	dBm/SCS Note4	-88.7		N/A	
CSI-RS_RP Note2	dBm/SCS Note4	N/A		-88.7	
$\hat{E}_s / I_{ot}$	dB	7		7	
Io Note2	dBm/95.04 MHz Note4	-58.92		-58.92	

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: Es/Iot, SS_RP, CSI_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: Void
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: Void
Note 6: All parameters apply for configuration 1 and 2
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.5.5.3.8.2 Test Requirements

During T2 the UE shall send the first CSI report for SCell in the first available uplink resource after slot (m+k). UE is allowed to postpone CSI report to next available uplink resource if an available uplink resource is subject to interruption. Whether CSI report in slot (m+k) was interrupted is checked by monitoring ACK/NACK sent in PCell in slot (m+k).

During T2 the UE shall start sending CSI reports for SCell with non-zero CQI index at latest in a slot m + $\frac{T_{HARQ}+T_{activtion_time}+T_{CSI_Reporting}}{NR\ slot\ length}$, $T_{activation_time} = T_{FirstATRS} + 5ms$, as defined in clause 8.3.

During T2 interruption of PSCell during SCell activation shall not happen outside the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $m + 1 + \frac{T_{\text{HARQ}} + 3\text{ms} + T_{\text{X}}}{\text{NR slot length}} + N_{\text{interruption}}$.

The interruption of PSCell shall not be more than the values specified for EN-DC in Clause 8.2.1.2.4.

All of the above test requirements shall be fulfilled in order for the observed SCell activation delay and SCell deactivation delay to be counted as correct. The rate of correct observed SCell activation delay during repeated tests shall be at least 90%.

NOTE: During T2 if there are no uplink resources for reporting the valid CSI in a slot m + $\frac{\text{T}_{\text{HARQ}} + T_{\text{activtion_time}} + T_{\text{CSI_Reporting}}}{NR\ slot\ length}$ as defined in clause 8.3 then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

A.5.5.4 Void

A.5.5.5 Beam Failure Detection and Link recovery procedures

A.5.5.5.1 EN-DC Beam Failure Detection and Link Recovery Test for FR2 PSCell configured with SSB-based BFD and LR in non-DRX mode

A.5.5.5.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving PSCell and that the UE performs correct SSB-based link recovery based on beam candicate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the PSCell, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR2 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.5.5.5.1.1-1, A.5.5.5.1.1-2, A.5.5.5.1.1-3 and A.5.5.5.1.1-4 below. There are two cells, cell 1 is the E-UTRAN PCell, and cell 2 is the PSCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.5.5.5.1.1-1 shows the variation of the downlink SNR of the PCell and the SNR of the SSB in set q_0 in the active PSCell to emulate SSB based beam failure. Figure A.5.5.5.1.1-2 shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test 1.

Table A.5.5.5.1.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
1	LTE FDD, TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth
2	LTE TDD, TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth
3	LTE FDD, TDD duplex mode, 240 kHz SSB SCS, 100 MHz bandwidth
4	LTE TDD, TDD duplex mode, 240 kHz SSB SCS, 100 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR2	

Table A.5.5.5.1.1-2: General test parameters for FR2 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter	Test	Unit	Value	Comment

		Config.			
				Test 1	
Active E-UTRA PCell		1-4		Cell 1	
E-UTRA RF Channel Number		1-4		1	
Active PCell		1-4		Cell 2	
RF Channel Number		1-4		2	
Duplex mode		1-4		TDD	
TDD Configuration		1-4		TDDConf.3.1	
$BW_{channel}$		1-4	MHz	100: $N_{RB,c}$ = 66	
Data RBs allocated		1-4		66	
PDSCH/PDCCH subcarrier spacing		1-4	kHz	120	
DL initial BWP configuration		1-4		DLBWP.0.1	
DL dedicated BWP configuration		1-4		DLBWP.1.1	
UL initial BWP configuration		1-4		ULBWP.0.1	
UL dedicated BWP configuration		1-4		ULBWP.1.1	
PDSCH Reference Channel		1-2		SR.3.2 TDD	
		3-4		SR.3.3 TDD	
RMSI CORESET Reference Channel		1-2		CR.3.1 TDD	
		3-4		CR.3.2 TDD	
Dedicated CORESET Reference Channel		1-2		CCR.3.1 TDD	
		3-4		CCR.3.7 TDD	
OCNG parameters		1-4		OP.1	
CP length		1-4		Normal	
PDSCH/PDCCH TCI state		1-4		TCI.State.0	
CSI-RS for tracking		1-4		TRS.2.1 TDD	
SSB Configuration		1-2		SSB.1 FR2	
		3-4		SSB.2 FR2	
SMTC Configuration		1-4		SMTC.3	
PRACH Configuration		1-4		FR2 PRACH configuration 2	A.3.8.3.2
DRX configuration		1-4		OFF	
SSB index assigned as BFD RS (q_0)		1-4		0	
SSB index assigned as CBD RS (q_1)		1-4		1	
SSB index assigned as RLM RS		1-4		0,1	
Beam failure detection transmission parameters	DCI format	1-4		1-0	
	Number of Control OFDM symbols	1-4		2	
	Aggregation level	1-4	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1-4	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1-4	dB	0	
	DMRS precoder granularity	1-4		REG bundle size	
	REG bundle size	1-4		6	
Gap pattern ID		1-4		gp0	
gapOffset		1-4	ms	0	
rlmInSyncOutOfSyncThreshold		1-4		absent	Value 0 is applied. (Table 8.1.1-1).
rsrp-ThresholdSSB		1-2	dBm/SCS	-95	Threshold used for $Q_{in_LR_SSB}$
		3-4		-92	
powerControlOffsetSS		1-4		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount		1-4		n1	see TS 38.321 [7], clause 5.17

beamFailureDetectionTimer	1-4		pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting	1-4		CSI-RS.3.1 TDD	
reportConfigType	1-4		periodic	
reportQuantity	1-4		cri-RI-PMI-CQI	
CSI reporting periodicity	1-4	slot	40	
CSI reporting offset	1-4	slot	4	
T310	1-4	ms	1000	
N310	1-4		2	
T1	1-4	s	1	The UE shall be fully synchronized to cell 1 during T1
T2	1-4	s	2.61	
T3	1-4	s	1.64	
T4	1-4	s	0	
T5	1-4	s	1.01	
D1	1-4	s	0.97	
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.5.5.5.1.1-3: Cell specific test parameters for FR2 PSCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
AoA setup			Setup 1 defined in A.3.15				
Assumption for UE beams[Note 10]			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q_0	Config 1-4	dB	5[Note 11]	-3[Note 11]	-12	-12	-12
SNR_SSB of set q_1	Config 1-4	dB	0.2	0.2	20.2	20.2	20.2
SSB_RP of set q_1	Config 1-2	dBm/SCS	-104.5	-104.5	-84.5	-84.5	-84.5
	Config 3-4		-101.5	-101.5	-81.5	-81.5	-81.5
N_{oc}	Config 1-4	dBm/120 KHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz				

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.5.5.5.1.1-1.
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.
Note 10:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 11:	This value allows up to 1dB degradation from applied SNR to UE baseband

Table A.5.5.5.1.1-4: Void

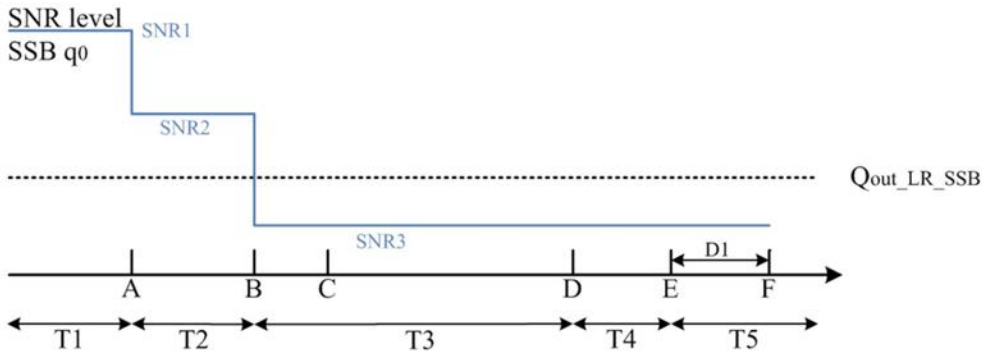

Figure A.5.5.5.1.1-1: SNR variation for SSB-based beam failure detection and link recovery testing in non-DRX mode

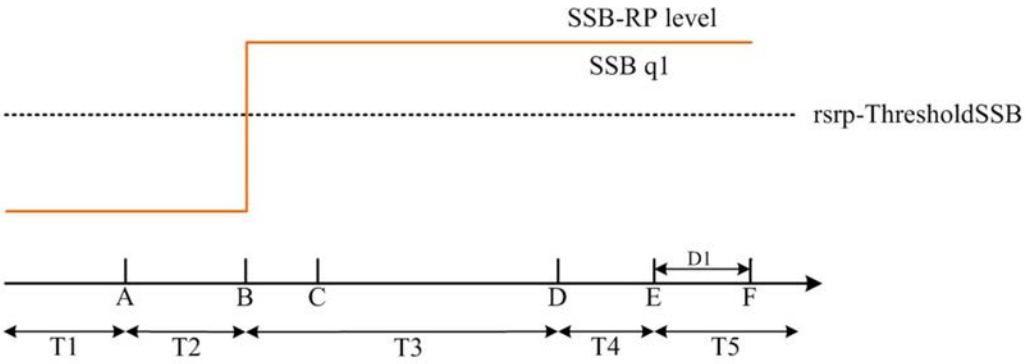

Figure A.5.5.5.1.1-2: SSB_RP level variation for SSB-based beam failure detection and link recovery testing in non-DRX mode

A.5.5.5.1.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 960+10 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.5.2 EN-DC Beam Failure Detection and Link Recovery Test for FR2 PSCell configured with SSB-based BFD and LR in DRX mode

A.5.5.5.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving PSCell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the PSCell, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR2 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.5.5.5.2.1-1, A.5.5.5.2.1-2, A.5.5.5.2.1-3, A.5.5.5.2.1-4 and A.5.5.5.2.1-5 below. There are two cells, cell 1 is the E-UTRAN PCell, and cell 2 is the PSCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.5.5.5.2.1-1 shows the variation of the downlink SNR of the PCell and the SNR of the SSB in set q_0 in the active PSCell to emulate SSB based beam failure. Figure A.5.5.5.2.1-2 shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in PCSell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.5.5.5.2.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
1	LTE FDD, TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth
2	LTE TDD, TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth
3	LTE FDD, TDD duplex mode, 240 kHz SSB SCS, 100 MHz bandwidth
4	LTE TDD, TDD duplex mode, 240 kHz SSB SCS, 100 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR2	

Table A.5.5.5.2.1-2: General test parameters for FR2 PSCell for SSB-based beam failure detection and link recovery testing in DRX mode

Parameter		Test Config.	Unit	Value	Comment
				Test 1	
Active E-UTRA PCell		1-4		Cell 1	
E-UTRA RF Channel Number		1-4		1	
Active PCell		1-4		Cell 2	
RF Channel Number		1-4		2	
Duplex mode		1-4		TDD	
TDD Configuration		1-4		TDDConf.3.1	
$BW_{channel}$		1-4	MHz	100: $N_{RB,c}$ = 66	
Data RBs allocated		1-4		66	
PDSCH/PDCCH subcarrier spacing		1-4	kHz	120	
DL initial BWP configuration		1-4		DLBWP.0.1	
DL dedicated BWP configuration		1-4		DLBWP.1.1	
UL initial BWP configuration		1-4		ULBWP.0.1	
UL dedicated BWP configuration		1-4		ULBWP.1.1	
PDSCH Reference Channel		1-2		SR.3.2 TDD	
		3-4		SR.3.3 TDD	
RMSI CORESET Reference Channel		1-2		CR.3.1 TDD	
		3-4		CR.3.2 TDD	
Dedicated CORESET Reference Channel		1-2		CCR.3.1 TDD	
		3-4		CCR.3.7 TDD	
OCNG parameters		1-4		OP.1	
CP length		1-4		Normal	
PDSCH/PDCCH TCI state		1-4		TCI.State.0	
CSI-RS for tracking		1-4		TRS.2.1 TDD	
SSB Configuration		1-2		SSB.1 FR2	
		3-4		SSB.2 FR2	
SMTC Configuration		1-4		SMTC.3	
PRACH Configuration		1-4		FR2 PRACH configuration 2	A.3.8.3.2
DRX configuration		1-4		DRX.3	A.3.3.3
SSB index assigned as BFD RS (q_0)		1-4		0	
SSB index assigned as CBD RS (q_1)		1-4		1	
SSB index assigned as RLM RS		1-4		0,1	
Beam failure detection transmission parameters	DCI format	1-4		1-0	
	Number of Control OFDM symbols	1-4		2	
	Aggregation level	1-4	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1-4	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1-4	dB	0	
	DMRS precoder granularity	1-4		REG bundle size	
	REG bundle size	1-4		6	
Gap pattern ID		1-4		N/A	
rlmInSyncOutOfSyncThreshold		1-4		absent	Value 0 is applied. (Table 8.1.1-1).
rsrp-ThresholdSSB		1-2	dBm/SCS	-95	Threshold used for $Q_{in_LR_SSB}$
		3-4		-92	

powerControlOffsetSS	1-4		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount	1-4		n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer	1-4		pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting	1-4		CSI-RS.3.1 TDD	
reportConfigType	1-4		periodic	
reportQuantity	1-4		cri-RI-PMI-CQI	
CSI reporting periodicity	1-4	slot	40	
CSI reporting offset	1-4	slot	4	
T310	1-4	ms	1000	
N310	1-4		2	
T1	1-4	s	1	The UE shall be fully synchronized to cell 1 during T1
T2	1-4	s	3.37	
T3	1-4	s	2.8	
T4	1-4	s	0	
T5	1-4	s	0.61	
D1	1-4	s	0.57	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.5.5.5.2.1-3: Cell specific test parameters for FR2 PSCell for SSB-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
AoA setup			Setup 1 defined in A.3.15				
Assumption for UE beams[Note 10]			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q_0	Config 1-4	dB	5[Note 11]	-3[Note 11]	-12	-12	-12
SNR_SSB of set q_1	Config 1-4	dB	0.2	0.2	20.2	20.2	20.2
SSB_RP of set q_1	Config 1-2	dBm/ SCS	-104.5	-104.5	-84.5	-84.5	-84.5
	Config 3-4		-101.5	-101.5	-81.5	-81.5	-81.5
N_{oc}	Config 1-4	dBm/120 KHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz				

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	Void
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.5.5.5.2.1-1.
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.
Note 10:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 11:	This value allows up to 1dB degradation from applied SNR to UE baseband

Table A.5.5.5.2.1-4: Void

Table A.5.5.5.2.1-5: Void

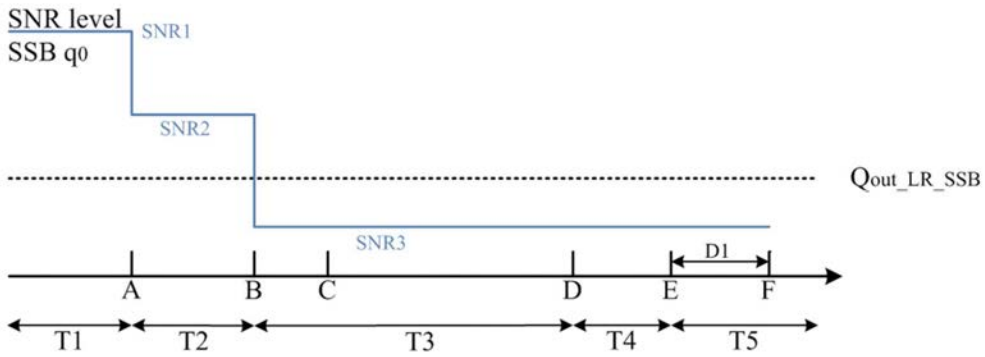

Figure A.5.5.5.2.1-1: SNR variation for SSB-based beam failure detection and link recovery testing in DRX mode

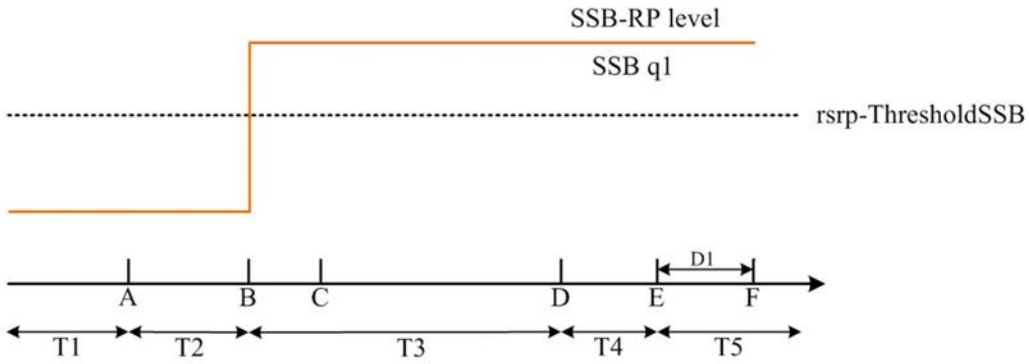

Figure A.5.5.5.2.1-2: SSB_RP level variation for SSB-based beam failure detection and link recovery testing in DRX mode

A.5.5.5.2.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 560+10 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.5.3 EN-DC Beam Failure Detection and Link Recovery Test for FR2 PSCell configured with CSI-RS-based BFD and LR in non-DRX mode

A.5.5.5.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving PSCell and that the UE performs correct CSI-RS-based link recovery based on beam candicate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the PSCell, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR2 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.5.5.5.3.1-1, A.5.5.5.3.1-2, and A.5.5.5.3.1-3 below. There are two cells, cell 1 is the E-UTRAN PCell, and cell 2 is the PSCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.5.5.5.3.1-1 shows the variation of the downlink SNR of the PCell and the SNR of the CSI-RS in set q_0 in the active PSCell to emulate CSI-RS based beam failure. Figure A.5.5.5.3.1-2 shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled.

Table A.5.5.5.3.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
1	LTE FDD, TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth
2	LTE TDD, TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Table A.5.5.5.3.1-2: General test parameters for FR2 PSCell for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Test Config.	Unit	Value	Comment
				Test 1	
Active E-UTRA PCell		1-2		Cell 1	
E-UTRA RF Channel Number		1-2		1	
Active PCell		1-2		Cell 2	
RF Channel Number		1-2		2	
Duplex mode		1-2		TDD	
TDD Configuration		1-2		TDDConf.3.1	
$BW_{channel}$		1-2		100: $N_{RB,c}$ = 66	
Data RBs allocated		1-2		66	
PDSCH/PDCCH subcarrier spacing		1-2	kHz	120	
DL initial BWP configuration		1-2		DLBWP.0.1	
DL dedicated BWP configuration		1-2		DLBWP.1.1	
UL initial BWP configuration		1-2		ULBWP.0.1	
UL dedicated BWP configuration		1-2		ULBWP.1.1	
PDSCH Reference Channel		1-2		SR.3.2 TDD	
RMSI CORESET Reference Channel		1-2		CR.3.1 TDD	
Dedicated CORESET Reference Channel		1-2		CCR.3.1 TDD	
OCNG parameters		1-2		OP.1	
CP length		1-2		Normal	
PDSCH/PDCCH TCI state		1-2		TCI.State.0	
CSI-RS for tracking		1-2		TRS.2.1 TDD	
SSB Configuration		1-2		SSB.1 FR2	
SMTC Configuration		1-2		SMTC.3	
PRACH Configuration		1-2		FR2 PRACH configuration 4	A.3.8.3.4
DRX configuration		1-2		OFF	
CSI-RS configuration for BFD/CBD/RLM		1-2		CSI-RS.3.2 TDD	A.3.14.2
CSI-RS index assigned as BFD RS (q_0)		1-2		0	
CSI-RS index assigned as CBD RS (q_1)		1-2		1	
CSI-RS index assigned as RLM RS		1-2		0,1	
Beam failure detection transmission parameters	DCI format	1-2		1-0	
	Number of Control OFDM symbols	1-2		2	
	Aggregation level	1-2	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1-2	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1-2	dB	0	
	DMRS precoder granularity	1-2		REG bundle size	
	REG bundle size	1-2		6	
Gap pattern ID		1-2		N/A	

rlmInSyncOutOfSyncThreshold	1-2		absent	Value 0 is applied. (Table 8.1.1-1).
rsrp-ThresholdSSB	1-2	dBm/SCS	-95	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS	1-2		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount	1-2		n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer	1-2		pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting	1-2		CSI-RS.3.1 TDD	A.3.14.2
reportConfigType	1-2		periodic	
reportQuantity	1-2		cri-RI-PMI-CQI	
CSI reporting periodicity	1-2	slot	40	
CSI reporting offset	1-2	slot	4	
T310	1-2	ms	1000	
N310	1-2		2	
T1	1-2	s	1	The UE shall be fully synchronized to cell 1 during T1
T2	1-2	s	1.17	
T3	1-2	s	0.9	
T4	1-2	s	0	
T5	1-2	s	0.31	
D1	1-2	s	0.27	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.5.5.5.3.1-3: Cell specific test parameters for FR2 PSCell for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
AoA setup			Setup 1 defined in A.3.15				
Assumption for UE beams[Note 10]			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set q_0	Config 1-2	dB	5 [Note 11]	-3 [Note 11]	-12	-12	-12
SNR_CSI-RS of set q_1	Config 1-2	dB	0.2	0.2	20.2	20.2	20.2
CSI-RS_RP of set q_1	Config 1-2	dBm/SCS	-104.5	-104.5	-84.5	-84.5	-84.5
N_{oc}	Config 1-2	dBm/120 KHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz				

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	Void
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.5.5.5.3.1-1.
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.
Note 10:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 11:	This value allows up to 1dB degradation from applied SNR to UE baseband

Table A.5.5.5.3.1-4: Void

Table A.5.5.5.3.1-5: Void

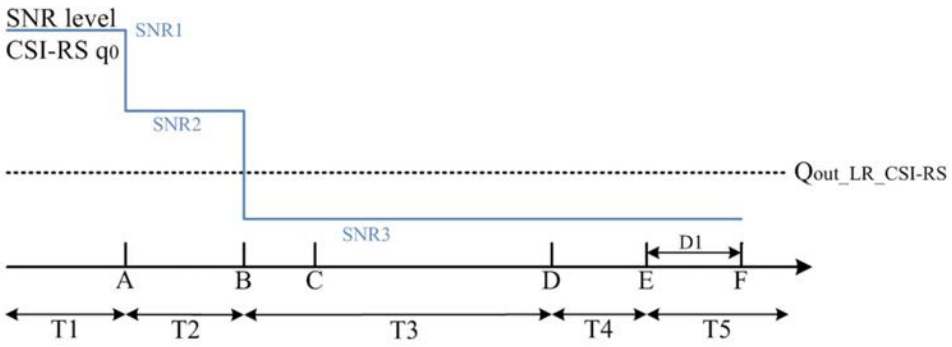

Figure A.5.5.5.3.1-1: SNR variation for CSI-RS based beam failure detection and link recovery testing in non-DRX mode

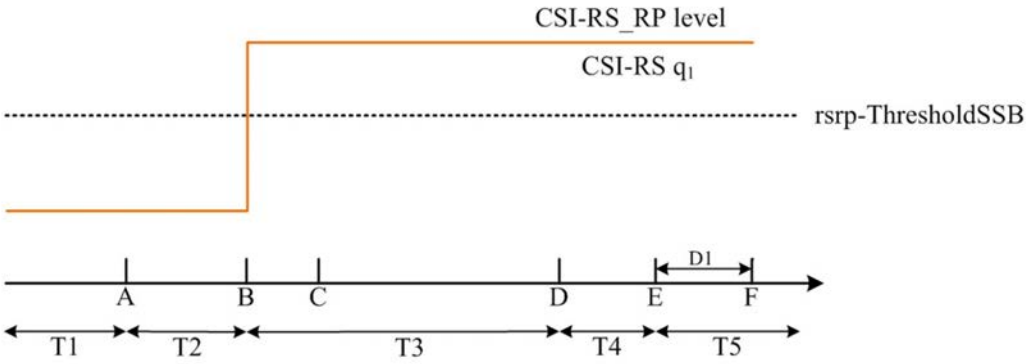

Figure A.5.5.5.3.1-2: CSI-RS_RP level variation for CSI-RS based beam failure detection and link recovery testing in non-DRX mode

A.5.5.5.3.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiat link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 260+10 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.5.4 EN-DC Beam Failure Detection and Link Recovery Test for FR2 PSCell configured with CSI-RS-based BFD and LR in DRX mode

A.5.5.5.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving PSCell and that the UE performs correct CSI-RS-based link recovery based on beam candicate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the PSCell, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR2 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.5.5.5.4.1-1, A.5.5.5.4.1-2, A.5.5.5.4.1-3, and A.5.5.5.4.1-4 below. There are two cells, cell 1 is the E-UTRAN PCell, and cell 2 is the PSCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.5.5.5.4.1-1 shows the variation of the downlink SNR of the PCell and the SNR of the CSI-RS in set q_0 in the active PSCell to emulate CSI-RS based beam failure. Figure A.5.5.5.4.1-2 shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to

decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

Table A.5.5.5.4.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
1	LTE FDD, TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth
2	LTE TDD, FDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Table A.5.5.5.4.1-2: General test parameters for FR2 PSCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

Parameter		Test Config.	Unit	Value	Comment
				Test 1	
Active E-UTRA PCell		1-2		Cell 1	
E-UTRA RF Channel Number		1-2		1	
Active PCell		1-2		Cell 2	
RF Channel Number		1-2		2	
Duplex mode		1-2		TDD	
TDD Configuration		1-2		TDDConf.3.1	
$BW_{channel}$		1-2		100: $N_{RB,c}$ = 66	
Data RBs allocated		1-2		66	
PDSCH/PDCCH subcarrier spacing		1-2	kHz	120	
DL initial BWP configuration		1-2		DLBWP.0.1	
DL dedicated BWP configuration		1-2		DLBWP.1.1	
UL initial BWP configuration		1-2		ULBWP.0.1	
UL dedicated BWP configuration		1-2		ULBWP.1.1	
PDSCH Reference Channel		1-2		SR.3.2 TDD	
RMSI CORESET Reference Channel		1-2		CR.3.1 TDD	
Dedicated CORESET Reference Channel		1-2		CCR.3.1 TDD	
OCNG parameters		1-2		OP.1	
CP length		1-2		Normal	
PDSCH/PDCCH TCI state		1-2		TCI.State.0	
CSI-RS for tracking		1-2		TRS.2.1 TDD	
SSB Configuration		1-2		SSB.1 FR2	
SMTC Configuration		1-2		SMTC.3	
PRACH Configuration		1-2		FR2 PRACH configuration 4	A.3.8.3.4
DRX configuration		1-2		DRX.3	A.3.3.3
CSI-RS configuration for BFD/CBD/RLM		1-2		CSI-RS.3.2 TDD	A.3.14.2
CSI-RS index assigned as BFD RS (q_0)		1-2		0	
CSI-RS index assigned as CBD RS (q_1)		1-2		1	
CSI-RS index assigned as RLM RS		1-2		0,1	
Beam failure detection transmission parameters	DCI format	1-2		1-0	
	Number of Control OFDM symbols	1-2		2	
	Aggregation level	1-2	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1-2	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1-2	dB	0	
	DMRS precoder granularity	1-2		REG bundle size	

REG bundle size	1-2		6	
Gap pattern ID	1-2		N/A	
rlmInSyncOutOfSyncThreshold	1-2		absent	Value 0 is applied. (Table 8.1.1-1).
rsrp-ThresholdSSB	1-2	dBm/SCS	-95	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS	1-2		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount	1-2		n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer	1-2		pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting	1-2		CSI-RS.3.1 TDD	A.3.14.2
reportConfigType	1-2		periodic	
reportQuantity	1-2		cri-RI-PMI-CQI	
CSI reporting periodicity	1-2	slot	40	
CSI reporting offset	1-2	slot	4	
T310	1-2	ms	1000	
N310	1-2		2	
T1	1-2	s	1	The UE shall be fully synchronized to cell 1 during T1
T2	1-2	s	5.43	
T3	1-2	s	5.16	
T4	1-2	s	0	
T5	1-2	s	0.31	
D1	1-2	s	0.27	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.5.5.5.4.1-3: Cell specific test parameters for FR2 PSCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
AoA setup			Setup 1 defined in A.3.155				
Assumption for UE beams[Note 10]			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set q_0	Config 1-2	dB	5 [Note 11]	-3 [Note 11]	-12	-12	-12
SNR_CSI-RS of set q_1	Config 1-2	dB	0.2	0.2	20.2	20.2	20.2
CSI-RS_RP of set q_1	Config 1-2	dBm/SCS	-104.5	-104.5	-84.5	-84.5	-84.5
N_{oc}	Config 1-2	dBm/120 KHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz				

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	Void
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.5.5.5.4.1-1.
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.
Note 10:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 11:	This value allows up to 1dB degradation from applied SNR to UE baseband

Table A.5.5.5.4.1-4: Void

Table A.5.5.5.4.1-5: Void

Table A.5.5.5.4.1-6: Void

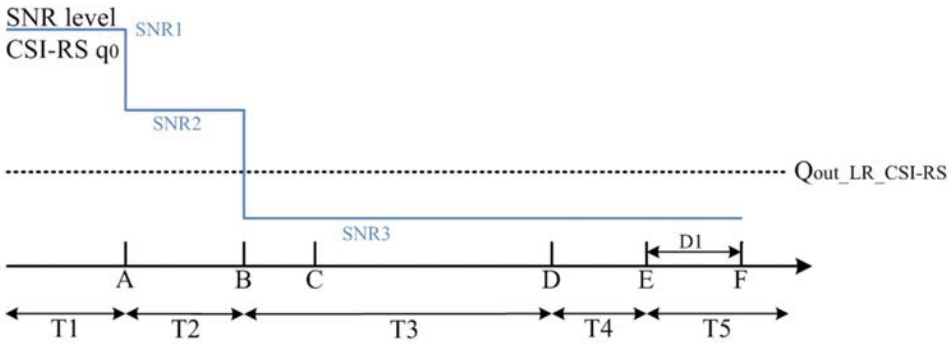

Figure A.5.5.5.4.1-1: SNR variation for CSI-RS-based beam failure detection and link recovery testing in DRX mode

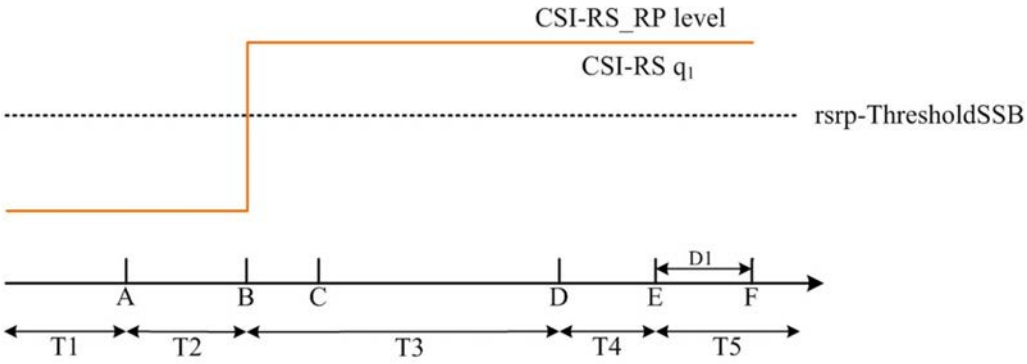

Figure A.5.5.5.4.1-2: CSI-RS_RP level variation for CSI-RS based beam failure detection and link recovery testing in DRX mode

A.5.5.5.4.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiat link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 260+10 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.5.5 EN-DC scheduling availability restriction during Beam Failure Detection and Link Recovery for FR2 PSCell configured with SSB-based BFD and LR in non-DRX mode

A.5.5.5.5.1 Test Purpose and Environment

The purpose is to test scheduling availability restrictions when the UE is performing beam failure detection or when the UE is performing L1-RSRP measurement for candidate beam detection, when no DRX is used. This test will verify the scheduling availability restriction requirements for SSB based beam failure detection and link recovery for an FR2 serving cell in clause 8.5.7 and 8.5.8.

The test parameters are given in Tables A.5.5.5.5.1-1, A.5.5.5.5.1-2 and A.5.5.5.5.1-3 below. There are two cells, cell 1 is the E-UTRAN PCell, and cell 2 is the PSCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.5.5.5.5.1-1 shows the variation of the downlink SNR of the PCell and the SNR of the SSB in set q_0 in the active PSCell to emulate SSB based beam failure. Figure A.5.5.5.5.1-2 shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. This test will focus on the scheduling availability during beam failure detection and candidate beam detection. In the test, DRX configuration

is not enabled. Test is to test the scheduling availability restriction of UE performing beam failure detection and candidate beam detection when SSB RS configured for Beam failure detection and candidate beam detection. During the test the UE is scheduled to transmit continuously in UL.

Table A.5.5.5.5.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 240 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 240 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.5.5.5.5.1-2: General test parameters for FR2 PSCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Test Config.	Unit	Value	Comment
				Test 1	
Active E-UTRA PCell		1-4		Cell 1	
E-UTRA RF Channel Number		1-4		1	
Active PCell		1-4		Cell 2	
RF Channel Number		1-4		2	
Duplex mode		1-4		TDD	
TDD Configuration		1-4		TDDConf.3.1	
$BW_{channel}$		1-4		100: $N_{RB,c}$ = 66	
Data RBs allocated		1-4		66	
PDSCH/PDCCH subcarrier spacing		1-4	kHz	120	
DL initial BWP configuration		1-4		DLBWP.0.1	
DL dedicated BWP configuration		1-4		DLBWP.1.1	
UL initial BWP configuration		1-4		ULBWP.0.1	
UL dedicated BWP configuration		1-4		ULBWP.1.1	
PDSCH Reference Channel		1-2		SR.3.2 TDD	
		3-4		SR.3.3 TDD	
RMSI CORESET Reference Channel		1-2		CR.3.1 TDD	
		3-4		CR.3.2 TDD	
Dedicated CORESET Reference Channel		1-2		CCR.3.1 TDD	
		3-4		CCR.3.7 TDD	
OCNG parameters		1-4		OP.1	
CP length		1-4		Normal	
PDSCH/PDCCH TCI state		1-4		TCI.State.0	
CSI-RS for tracking		1-4		TRS.2.1 TDD	
SSB Configuration		1-2		SSB.1 FR2	
		3-4		SSB.2 FR2	
SMTC Configuration		1-4		SMTC.1	
PRACH Configuration		1-4		FR2 PRACH configuration 2	A.3.8.3.2
DRX configuration		1-4		OFF	
SSB index assigned as BFD RS (q_0)		1-4		0	
SSB index assigned as CBD RS (q_1)		1-4		1	
Beam failure detection transmission parameters	DCI format	1-4		1-0	
	Number of Control OFDM symbols	1-4		2	
	Aggregation level	1-4	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1-4	dB	0	

	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1-4	dB	0	
	DMRS precoder granularity	1-4		REG bundle size	
	REG bundle size	1-4		6	
Gap pattern ID		1-4		N/A	No measurement gap is configured
rlmInSyncOutOfSyncThreshold		1-4		absent	Value 0 is applied. (Table 8.1.1-1).
rsrp-ThresholdSSB		1-2	dBm/SCS	-95	Threshold used for $Q_{in_LR_SSB}$
		3-4		-92	
powerControlOffsetSS		1-4		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount		1-4		n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer		1-4		pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting		1-4		CSI-RS.3.1 TDD	
reportConfigType		1-4		periodic	
reportQuantity		1-4		cri-RI-PMI-CQI	
CSI reporting periodicity		1-4	slot	40	
CSI reporting offset		1-4	slot	4	
T310		1-4	ms	1000	
N310		1-4		2	
T1		1-4	s	1	The UE shall be fully synchronized to cell 1 during T1
T2		1-4	s	2.6	
T3		1-4	s	1.64	
T4		1-4	s	0	
T5		1-4	s	1.01	
D1		1-4	s	0.97	
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.					

Table A.5.5.5.5.1-3: Cell specific test parameters for FR2 PSCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
AoA setup			Setup 1 defined in A.3.15				
Assumption for UE beams[Note 10]			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q_0	Config 1-4	dB	5[Note 11]	-3[Note 11]	-12	-12	-12
SNR_SSB of set q_1	Config 1-4	dB	0.2	0.2	20.2	20.2	20.2

SSB_RP of set q_1	Config 1-2	dBm/ SCS	-104.5	-104.5	-84.5	-84.5	-84.5
	Config 3-4		-101.5	-101.5	-81.5	-81.5	-81.5
N_{oc}	Config 1-4	dBm/120 kHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Void
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.5.5.5.5.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.
Note 10: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband

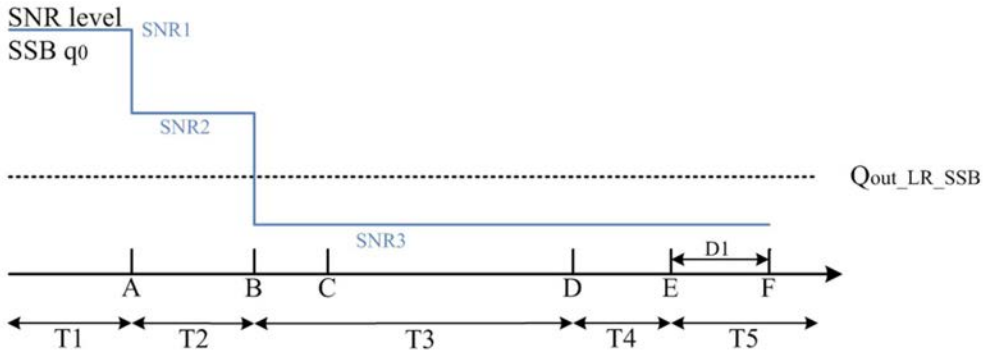

Figure A.5.5.5.5.1-1: SNR variation for SSB-based beam failure detection and link recovery testing in non-DRX mode

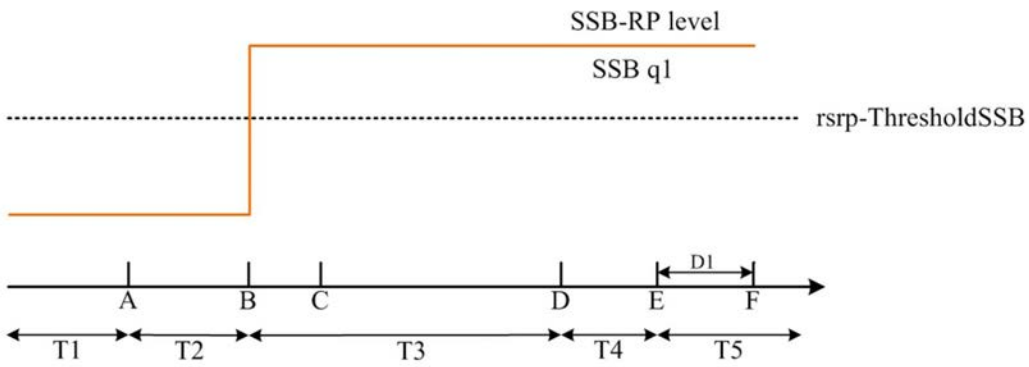

Figure A.5.5.5.5.1-2: SSB_RP level variation for SSB-based beam failure detection and link recovery testing in non-DRX mode

A.5.5.5.5.2 Test Requirements

The UE behaviour during time duration T3 follows the requirements defined in clause 8.5.7.3:

- The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on BFD-RS symbols to be measured for beam failure detection.

The UE behaviour during time durations T4 and T5 follows the requirements defined in clause 8.5.8.3:

- The UE is not expected to transmit PUCCH/PUSCH or receive PDCCH/PDSCH on reference symbols to be measured for candidate beam detection.

A.5.5.5.6 EN-DC Beam Failure Detection and Link Recovery Test for FR2 SCell configured with CSI-RS-based BFD and LR in non-DRX mode

A.5.5.5.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for an active SCell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the SCell with *schedulingRequestID-BFR-SCell-r16* configuration, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR2 SCell requirements in clause 8.5.

The test parameters are given in Tables A.5.5.5.6.1-1, A.5.5.5.6.1-2 and A.5.5.5.6.1-3. There are three cells, cell 1 is the E-UTRAN PCell, cell 2 is the PSCell, and cell 3 is the SCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.5.5.5.6.1-1 shows the variation of the downlink SNR of the active SCell and the SNR of the CSI-RS in set q_0 in the active SCell to emulate CSI-RS based beam failure. Figure A.5.5.5.6.1-2 shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1, cell 2, and cell 3. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled.

Table A.5.5.5.6.1-1: Supported test configurations for FR2 PSCell and SCell

Configuration	Description
1	LTE FDD, TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth
2	LTE TDD, TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Table A.5.5.5.6.1-2: General test parameters for FR2 SCell for beam failure detection and link recovery testing in non-DRX mode

Parameter		Test Config.	Unit	Value	Comment
				Test 1	
Active E-UTRA PCell		1-2		Cell 1	
E-UTRA RF Channel Number		1-2		1	
Active PCell		1-2		Cell 2	
RF Channel Number for PSCell		1-2		2	
Active SCell		1-2		Cell 3	
RF Channel Number for SCell		1-2		3	
Duplex mode		1-2		TDD	
TDD Configuration		1-2		TDDConf.3.1	
$BW_{channel}$		1-2	MHz	100: $N_{RB,c}$ = 66	
Data RBs allocated		1-2		66	
PDSCH/PDCCH subcarrier spacing		1-2	kHz	120	
DL initial BWP configuration		1-2		DLBWP.0.1	
DL dedicated BWP configuration		1-2		DLBWP.1.1	
UL initial BWP configuration		1-2		ULBWP.0.1	
UL dedicated BWP configuration		1-2		ULBWP.1.1	
PDSCH Reference Channel		1-2		SR.3.2 TDD	
RMSI CORESET Reference Channel		1-2		CR.3.1 TDD	A.3.1.2
Dedicated CORESET Reference Channel		1-2		CCR.3.1 TDD	
OCNG parameters		1-2		OP.1	A.3.2.1
CP length		1-2		Normal	
PDSCH/PDCCH TCI state		1-2		TCI.State.0	
CSI-RS for tracking		1-2		TRS.2.1 TDD	
SSB Configuration		1-2		SSB.3 FR2	A.3.10
SMTC Configuration		1-2		SMTC.3	A.3.11
PRACH Configuration		1-2		FR2 PRACH configuration 4	Table A.3.8.3.4-1
DRX configuration		1-2		OFF	
CSI-RS configuration for BFD/CBD in activated SCell		1-2		CSI-RS.3.2 TDD	A.3.14.2
CSI-RS index assigned as BFD RS (q_0) in activated SCell		1-2		0	
CSI-RS index assigned as CBD RS (q_1) in activated SCell		1-2		1	
CSI-RS configuration for RLM in PSCell		1-2		CSI-RS.3.2 TDD	A.3.14.2
Beam failure detection transmission parameters	DCI format	1-2		1-0	
	Number of Control OFDM symbols	1-2		2	
	Aggregation level	1-2	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1-2	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1-2	dB	0	
	DMRS precoder granularity	1-2		REG bundle size	
	REG bundle size	1-2		6	
Gap pattern ID		1-2		N/A	
schedulingRequestID-BFR-SCell-r16		1-2		Configured	

Periodicity of PUCCH for SR configuration for BFR on SCell	1-2	slot	40	5ms
Offset of PUCCH for SR configuration for BFR on SCell	1-2	slot	4	
PUCCH parameters for SR configuration for BFR on SCell	1-2		Table 8.3.3.1.2-1 in [13]	
rlmInSyncOutOfSyncThreshold	1-2		absent	Value 0 is applied. (Table 8.1.1-1).
rsrp-ThresholdSSB	1-2	dBm/SCS	-95	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS	1-2		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount	1-2		n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer	1-2		pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting	1-2		CSI-RS.3.1 TDD	A.3.14.2
reportConfigType	1-2		periodic	
reportQuantity	1-2		cri-RI-PMI-CQI	
CSI reporting periodicity	1-2	slot	40	
CSI reporting offset	1-2	slot	4	
T310	1-2	ms	1000	
N310	1-2		2	
T1	1-2	s	1	The UE shall be fully synchronized to cell 1 during T1
T2	1-2	s	1.17	
T3	1-2	s	0.9	
T4	1-2	s	0	
T5	1-2	s	0.31	
D1	1-2	s	0.27	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.5.5.5.6.1-3: Cell specific test parameters for FR2 SCell for beam failure detection and link recovery testing in non-DRX mode

Parameter	Unit	Cell2	Cell3 Test 1				
		T1 to T5	T1	T2	T3	T4	T5
AoA setup		Setup 1 defined in A.3.15	Setup 1 defined in A.3.15				
Assumption for UE beams[Note 10]		Rough	Rough				
EPRE ratio of PDCCH DMRS to SSS	dB	0	0				
EPRE ratio of PDCCH to PDCCH DMRS	dB						
EPRE ratio of PBCH DMRS to SSS	dB						
EPRE ratio of PBCH to PBCH DMRS	dB						
EPRE ratio of PSS to SSS	dB						
EPRE ratio of PDSCH DMRS to SSS	dB						

EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
SNR_CSI-RS of set q_0	Config 1,2	dB	5	5	-3	-12	-12	-12
SNR_CSI-RS of set q_1	Config 1,2	dB	0.2	0.2	0.2	20.2	20.2	20.2
CSI-RS_RP of set q_1	Config 1,2	dBm/SCS kHz	-104.5	-104.5	-104.5	-84.5	-84.5	-84.5
N_{oc}	Config 1,2	Config 1	dBm/120 kHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz	TDL-A 30ns 75Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Void
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.5.5.5.6.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.
Note 10: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

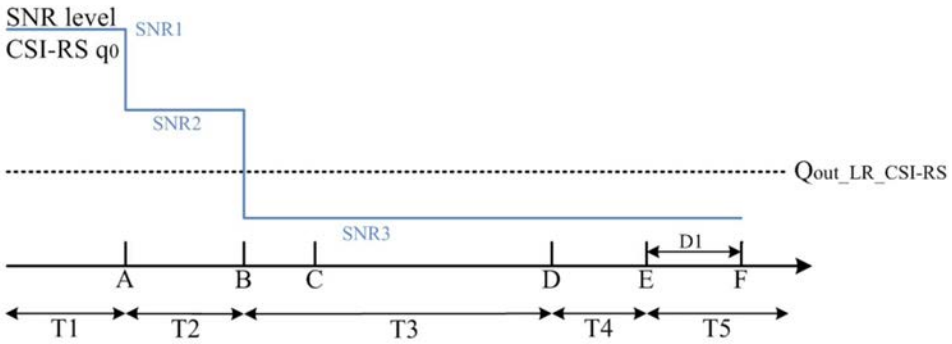

Figure A.5.5.5.6.1-1: SNR variation for CSI-RS based beam failure detection and link recovery testing for SCell in non-DRX mode

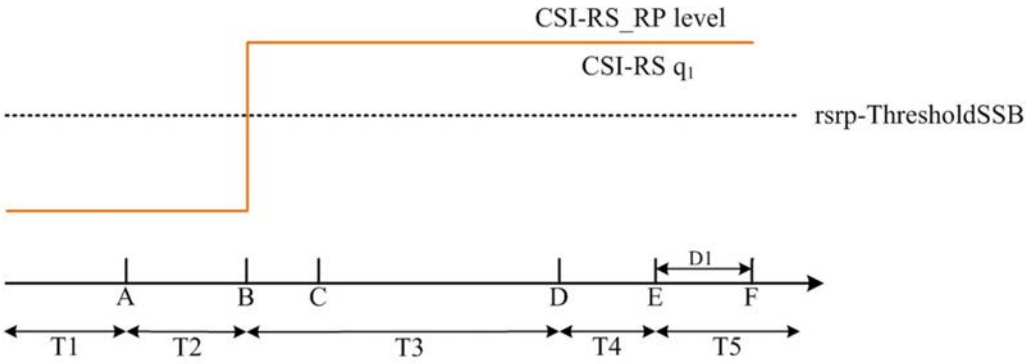

Figure A.5.5.5.6.1-2: CSI-RS_RP level variation for CSI-RS based beam failure detection and link recovery testing for SCell in non-DRX mode

A.5.5.5.6.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 in A.5.5.5.6.1 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 2.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 2 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 2.

During T3 the UE shall detect beam failure and initial link recovery. During T4 and T5 the UE measures and evaluates beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 260+10 ms after the start of T5, the UE shall transmit PUCCH with LRR, followed by BFR MAC CE containing a beam associated with the candidate beam set q_1. The UE shall not transmit PUCCH with an LRR with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.5.7 EN-DC Beam Failure Detection and Link Recovery Test for FR2 SCell configured with CSI-RS-based BFD and LR in DRX mode

A.5.5.5.7.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for an active SCell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the SCell with *schedulingRequestID-BFR-SCell-r16* configuration, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR2 SCell requirements in clause 8.5.

The test parameters are given in Tables A.5.5.5.7.1-1, A.5.5.5.7.1-2 and A.5.5.5.7.1-3. There are three cells, cell 1 is the E-UTRAN PCell, cell 2 is the PSCell, and cell 3 is the SCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.5.5.5.7.1-1 shows the variation of the downlink SNR of the active SCell and the SNR of the CSI-RS in set q_0 in the active SCell to emulate CSI-RS based beam failure. Figure A.5.5.5.7.1-2 shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1, cell 2, and cell 3. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5

ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

Table A.5.5.5.7.1-1: Supported test configurations for FR2 PSCell and SCell

Configuration	Description
1	LTE FDD, TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth
2	LTE TDD, TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Table A.5.5.5.7.1-2: General test parameters for FR2 SCell for beam failure detection and link recovery testing in DRX mode

Parameter		Test Config.	Unit	Value	Comment
				Test 1	
Active E-UTRA PCell		1-2		Cell 1	
E-UTRA RF Channel Number		1-2		1	
Active PCell		1-2		Cell 2	
RF Channel Number for PSCell		1-2		2	
Active SCell		1-2		Cell 3	
RF Channel Number for SCell		1-2		3	
Duplex mode		1-2		TDD	
TDD Configuration		1-2		TDDConf.3.1	
$BW_{channel}$		1-2	MHz	100: $N_{RB,c}$ = 66	
Data RBs allocated		1-2		66	
PDSCH/PDCCH subcarrier spacing		1-2	kHz	120	
DL initial BWP configuration		1-2		DLBWP.0.1	
DL dedicated BWP configuration		1-2		DLBWP.1.1	
UL initial BWP configuration		1-2		ULBWP.0.1	
UL dedicated BWP configuration		1-2		ULBWP.1.1	
PDSCH Reference Channel		1-2		SR.3.2 TDD	
RMSI CORESET Reference Channel		1-2		CR.3.1 TDD	A.3.1.2
Dedicated CORESET Reference Channel		1-2		CCR.3.1 TDD	
OCNG parameters		1-2		OP.1	A.3.2.1
CP length		1-2		Normal	
PDSCH/PDCCH TCI state		1-2		TCI.State.0	
CSI-RS for tracking		1-2		TRS.2.1 TDD	
SSB Configuration		1-2		SSB.3 FR2	A.3.10
SMTC Configuration		1-2		SMTC.3	A.3.11
PRACH Configuration		1-2		FR2 PRACH configuration 4	Table A.3.8.3.4-1
DRX configuration		1-2		DRX.3	A.3.3.3
CSI-RS configuration for BFD/CBD in activated SCell		1-2		CSI-RS.3.2 TDD	A.3.14.2
CSI-RS index assigned as BFD RS (q_0) in activated SCell		1-2		0	
CSI-RS index assigned as CBD RS (q_1) in activated SCell		1-2		1	
CSI-RS configuration for RLM in PSCell		1-2		CSI-RS.3.2 TDD	A.3.14.2
Beam failure detection transmission parameters	DCI format	1-2		1-0	
	Number of Control OFDM symbols	1-2		2	
	Aggregation level	1-2	CCE	8	

	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1-2	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1-2	dB	0	
	DMRS precoder granularity	1-2		REG bundle size	
	REG bundle size	1-2		6	
Gap pattern ID		1-2		N/A	
schedulingRequestID-BFR-SCell-r16		1-2		Configured	
Periodicity of PUCCH for SR configuration for BFR on SCell		1-2	slot	40	5ms
Offset of PUCCH for SR configuration for BFR on SCell		1-2	slot	4	
PUCCH parameters for SR configuration for BFR on SCell		1-2		Table 8.3.3.1.2-1 in [13]	
rlmInSyncOutOfSyncThreshold		1-2		absent	Value 0 is applied. (Table 8.1.1-1).
rsrp-ThresholdSSB		1-2	dBm/SCS	-95	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS		1-2		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount		1-2		n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer		1-2		pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting		1-2		CSI-RS.3.1 TDD	A.3.14.2
reportConfigType		1-2		periodic	
reportQuantity		1-2		cri-RI-PMI-CQI	
CSI reporting periodicity		1-2	slot	40	
CSI reporting offset		1-2	slot	4	
T310		1-2	ms	1000	
N310		1-2		2	
T1		1-2	s	1	The UE shall be fully synchronized to cell 1 during T1
T2		1-2	s	5.43	
T3		1-2	s	5.16	
T4		1-2	s	0	
T5		1-2	s	0.31	
D1		1-2	s	0.27	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.					

Table A.5.5.5.7.1-3: Cell specific test parameters for FR2 SCell for beam failure detection and link recovery testing in DRX mode

Parameter	Unit	Cell2	Cell3 Test 1				
			T1	T2	T3	T4	T5
AoA setup		Setup 1 defined in A.3.155	Setup 1 defined in A.3.155				
Assumption for UE beams[Note 10]		Rough	Rough				

EPRE ratio of PDCCH DMRS to SSS		dB	0	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB						
EPRE ratio of PBCH DMRS to SSS		dB						
EPRE ratio of PBCH to PBCH DMRS		dB						
EPRE ratio of PSS to SSS		dB						
EPRE ratio of PDSCH DMRS to SSS		dB						
EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
SNR_CSI-RS of set q_0	Config 1,2	dB	5	5	-3	-12	-12	-12
SNR_CSI-RS of set q_1	Config 1,2	dB	0.2	0.2	0.2	20.2	20.2	20.2
CSI-RS_RP of set q_1	Config 1,2	dBm/ SCS kHz	-104.5	-104.5	-104.5	-84.5	-84.5	-84.5
N_{oc}	Config 1,2	dBm/120 kHz	-104.7	-104.7				
Propagation condition			TDL-A 30ns 75Hz	TDL-A 30ns 75Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Void
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.5.5.5.7.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.
Note 10: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

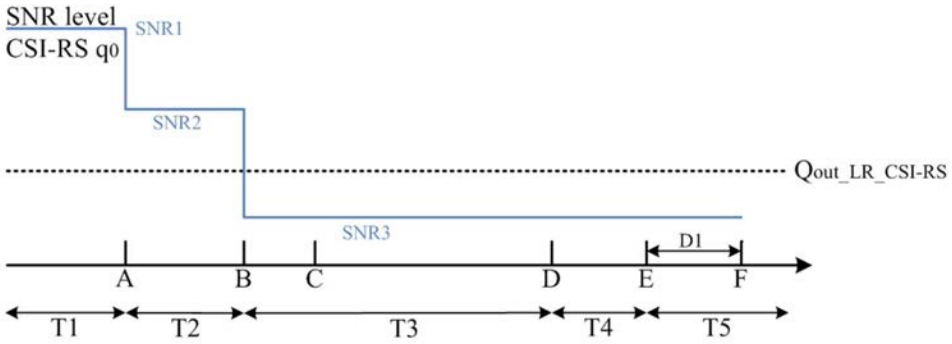

Figure A.5.5.5.7.1-1: SNR variation for CSI-RS-based beam failure detection and link recovery testing for SCell in DRX mode

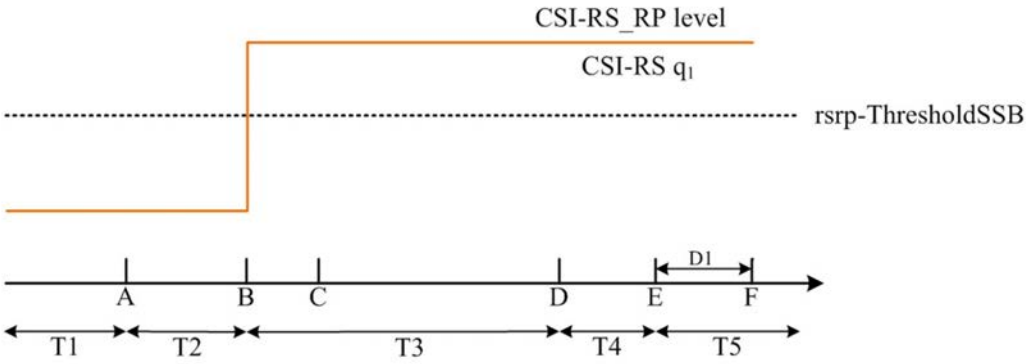

Figure A.5.5.5.7.1-2: CSI-RS_RP level variation for CSI-RS based beam failure detection and link recovery testing for SCell in DRX mode

A.5.5.5.7.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 in A.5.5.5.7.1 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 2.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 2.

During T3 the UE shall detect beam failure and initial link recovery. During T4 and T5 the UE measures and evaluates beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 260+10 ms after the start of T5, the UE shall transmit PUCCH with LRR, followed by BFR MAC CE containing a beam associated with the candidate beam set q_1. The UE shall not transmit PUCCH with an LRR with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.5.8 EN-DC TRP specific Beam Failure Detection and Link Recovery Test for FR2 PSCell configured with CSI-RS-based BFD and LR in DRX mode

A.5.5.5.8.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the TRP specific CSI-RS-based beam failure in the set (q0,0), (q0,1) configured for a serving PSCell and a cell with PCID different from the serving cell, and that the UE performs correct CSI-RS-based link recovery based on beam candidate set (q1,0) and (q1,1). The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the PSCell with *schedulingRequestID-BFR-r17* configured, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR2 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.5.5.5.8.1-1, A.5.5.5.8.1-2, A.5.5.5.8.1-3, and A.5.5.5.8.1-4 below. There are three cells, cell 1 is the E-UTRAN PCell, cell 2 is the PSCell and cell 3 is the cell with different PCID in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.5.5.5.8.1-1 shows the variation of the downlink SNR of the PSCell and the SNR of the CSI-RS in set q_0 in the

active PSCell to emulate CSI-RS based beam failure. Figure A.5.5.5.8.1-1 additionally shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

Table A.5.5.5.8.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
1	LTE FDD, NR 120 kHz SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SCS, 100 MHz bandwidth, TDD duplex mode

Table A.5.5.5.8.1-2: General test parameters for FR2 PSCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

Parameter	Test Config.	Unit	Value	Comment
			Test 1	
Active E-UTRA PCell	1-2		Cell 1	
E-UTRA RF Channel Number	1-2		1	
Active PSCell	1-2		Cell 2	
RF Channel Number	1-2		2	
Duplex mode	1-2		TDD	
TDD Configuration	1-2		TDDConf.3.1	
$BW_{channel}$	1-2		100: $N_{RB,c}$ = 66	
Data RBs allocated	1-2		66	
PDSCH/PDCCH subcarrier spacing	1-2	kHz	120	
DL initial BWP configuration	1-2		DLBWP.0.1	
DL dedicated BWP configuration	1-2		DLBWP.1.1	
UL initial BWP configuration	1-2		ULBWP.0.1	
UL dedicated BWP configuration	1-2		ULBWP.1.1	
PDSCH Reference Channel	1-2		SR.3.2 TDD	
RMSI CORESET Reference Channel	1-2		CR.3.1 TDD	
Dedicated CORESET Reference Channel	1-2		CCR.3.1 TDD	
OCNG parameters	1-2		OP.1	
CP length	1-2		Normal	
PDSCH/PDCCH TCI state	1-2		TCI.State.0	
CSI-RS for tracking	1-2		TRS.2.1 TDD	
SSB Configuration	1-2		SSB.1 FR2	
SMTC Configuration	1-2		SMTC.3	
PRACH Configuration	1-2		FR2 PRACH configuration 4	A.3.8.3.4
DRX configuration	1-2		DRX.3	A.3.3.3
CSI-RS configuration for TRP0	1-2		CSI-RS.3.2 TDD	A.3.14.2
CSI-RS configuration for TRP1			CSI-RS.3.6 TDD	A.3.14.2
CSI-RS index assigned as BFD RS ($q_{0,0}$)	1-2		CSI-RS#0	
CSI-RS index assigned as CBD RS ($q_{1,0}$)	1-2		CSI-RS#1	

CSI-RS index assigned as BFD RS ($q_{0,1}$)		1-2		CSI-RS#2	
CSI-RS index assigned as CBD RS ($q_{1,1}$)		1-2		CSI-RS#3	
CSI-RS index assigned as RLM RS		1-2		0,1,2,3	
Beam failure detection transmission parameters	DCI format	1-2		1-0	
	Number of Control OFDM symbols	1-2		2	
	Aggregation level	1-2	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1-2	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1-2	dB	0	
	DMRS precoder granularity	1-2		REG bundle size	
	REG bundle size	1-2		6	
Gap pattern ID		1-2		N/A	
schedulingRequestID-BFR- r17		1-2		Configured	
Periodicity of PUCCH for SR configuration for BFR on PSCell		1-2	slot	40	5ms
rlmInSyncOutOfSyncThreshold		1-2		absent	Value 0 is applied. (Table 8.1.1-1).
rsrp-ThresholdSSB		1-2	dBm/SCS	-95	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS		1-2		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount		1-2		n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer		1-2		pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting		1-2		CSI-RS.3.1 TDD	A.3.14.2
reportConfigType		1-2		periodic	
reportQuantity		1-2		cri-RI-PMI-CQI	
CSI reporting periodicity		1-2	slot	40	
CSI reporting offset		1-2	slot	4	
T310		1-2	ms	1000	
N310		1-2		2	
T1		1-2	s	1	The UE shall be fully synchronized to cell 1 during T1
T2		1-2	s	10.81	
T3		1-2	s	10.28	
T4		1-2	s	0	

T5	1-2	s	0.57	
D1	1-2	s	0.53	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.5.5.5.8.1-3: Cell specific test parameters for FR2 PSCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
AoA setup			Setup 3 defined in A.3.15				
Assumption for UE beams[Note 10]			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set $q_{0,0}$	Config 1-2	dB	5	-3	-12	-12	-12
SNR_CSI-RS of set $q_{1,0}$	Config 1-2	dB	5	5	5	5	5
SNR_CSI-RS of set $q_{0,1}$	Config 1-2	dB	0.2	0.2	20.2	20.2	20.2
SNR_CSI-RS of set $q_{1,1}$	Config 1-2	dB	0.2	0.2	20.2	20.2	20.2
CSI-RS_RP of set $q_{1,0}$	Config 1-2	dBm/SCS	-104.5	-104.5	-84.5	-84.5	-84.5
CSI-RS_RP of set $q_{1,1}$	Config 1-2	dBm/SCS	-104.5	-104.5	-84.5	-84.5	-84.5
N_{oc}	Config 1-2	dBm/120 KHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Void
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.5.5.5.4.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.
Note 10: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband

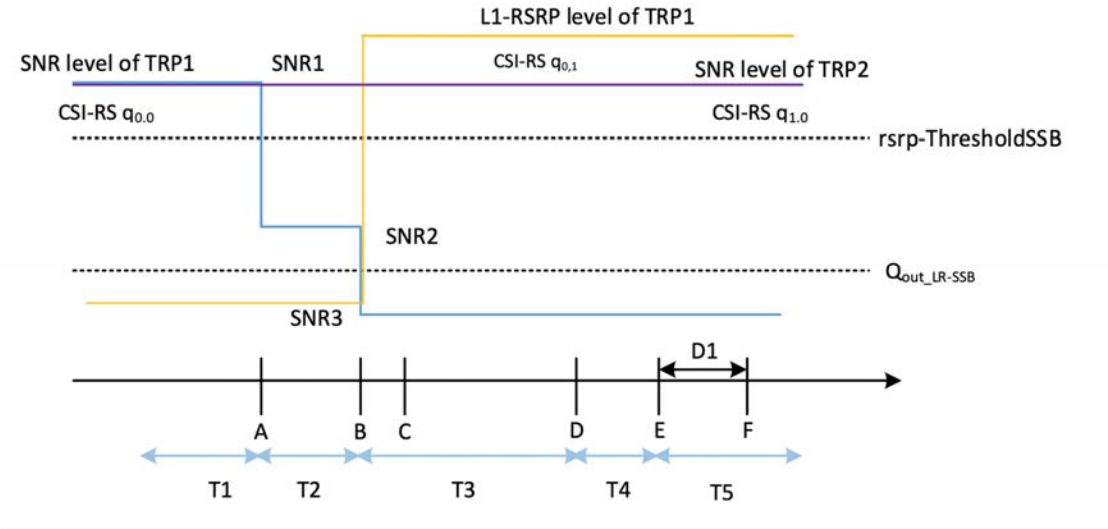

Figure A.5.5.5.8.1-1: SNR and L1-RSRP variation for CSI-RS-based beam failure detection and link recovery testing in DRX mode

A.5.5.5.8.2 Test Requirements

Test requirements are applied to TRP specific report respectively on (q0,0), (q0,1) for cell-2 and (q1,0), (q1,1) for cell-3 repectively as Figure A.5.5.5.8.1-1.

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiat link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 260+10 ms after the start of T5, the UE shall transmit PUCCH with LRR, followed by BFR MAC CE containing a beam associated with the candidate beam set $q_{1,0}$. The UE shall not transmit PUCCH with an LRR with the candidate beam set $q_{1,0}$ earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.5.9 Beam Failure Detection and Link Recovery Test for FR2 PSCell configured with SSB-based BFD and LR in DRX mode for UE fulfilling relaxed measurement criterion

A.5.5.5.9.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving PSCell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the PSCell, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR2 serving cell requirements in clause 8.5.2.4 for UE fulfilling good

serving cell quality criterion, if configured. *goodServingCellEvaluationBFD* [2] criterion is configured according to the parameters listed in Table A.5.5.5.9.1-2.

The test parameters are given in Tables A.5.5.5.9.1-1, A.5.5.5.9.1-2 and A.5.5.5.9.1-3 below. There are two cells, cell 1 is the E-UTRAN PCell, and cell 2 is the PSCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.5.5.5.9.1-1 shows the variation of the downlink SNR of the PCell and the SNR of the SSBs in set q_0 in the active PSCell to emulate SSB based beam failure. Figure A.5.5.5.9.1-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in PSCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

Table A.5.5.5.9.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
1	LTE FDD, TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth
2	LTE TDD, TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth
3	LTE FDD, TDD duplex mode, 240 kHz SSB SCS, 100 MHz bandwidth
4	LTE TDD, TDD duplex mode, 240 kHz SSB SCS, 100 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR2	

Table A.5.5.5.9.1-2: General test parameters for FR2 PSCell for SSB-based beam failure detection and link recovery testing in DRX mode

Parameter	Test Config.	Unit	Value	Comment
			Test 1	
Active E-UTRA PCell	1-4		Cell 1	
E-UTRA RF Channel Number	1-4		1	
Active PCell	1-4		Cell 2	
RF Channel Number	1-4		2	
Duplex mode	1-4		TDD	
TDD Configuration	1-4		TDDConf.3.1	
$BW_{channel}$	1-4	MHz	100: $N_{RB,c}$ = 66	
Data RBs allocated	1-4		66	
PDSCH/PDCCH subcarrier spacing	1-4	kHz	120	
DL initial BWP configuration	1-4		DLBWP.0.1	
DL dedicated BWP configuration	1-4		DLBWP.1.1	
UL initial BWP configuration	1-4		ULBWP.0.1	
UL dedicated BWP configuration	1-4		ULBWP.1.1	
PDSCH Reference Channel	1-2		SR.3.2 TDD	
	3-4		SR.3.3 TDD	
RMSI CORESET Reference Channel	1-2		CR.3.1 TDD	
	3-4		CR.3.2 TDD	
Dedicated CORESET Reference Channel	1-2		CCR.3.1 TDD	
	3-4		CCR.3.7 TDD	
OCNG parameters	1-4		OP.1	
CP length	1-4		Normal	
PDSCH/PDCCH TCI state	1-4		TCI.State.0	
CSI-RS for tracking	1-4		TRS.2.1 TDD	
SSB Configuration	1-2		SSB.1 FR2	
	3-4		SSB.2 FR2	
SMTC Configuration	1-4		SMTC.3	

PRACH Configuration		1-4		FR2 PRACH configuration 2	A.3.8.3.2
DRX configuration		1-4		DRX.3	A.3.3.3
SSB index assigned as BFD RS (q_0)		1-4		0,1	
SSB index assigned as CBD RS (q_1)		1-4		2	
SSB index assigned as RLM RS		1-4		0,2	
Beam failure detection transmission parameters	DCI format	1-4	1-0	1-0	
	Number of Control OFDM symbols	1-4		2	
	Aggregation level	1-4	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1-4	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1-4	dB	0	
	DMRS precoder granularity	1-4		REG bundle size	
	REG bundle size	1-4		6	
Gap pattern ID		1-4		N/A	
rlmInSyncOutOfSyncThreshold		1-4		absent	Value 0 is applied. (Table 8.1.1-1).
rsrp-ThresholdSSB		1-2	dBm/SCS	-95	Threshold used for $Q_{in_LR_SSB}$
		3-4		-92	
powerControlOffsetSS		1-4		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount		1-4		n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer		1-4		pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting		1-4		CSI-RS.3.1 TDD	
reportConfigType		1-4		periodic	
reportQuantity		1-4		cri-RI-PMI-CQI	
CSI reporting periodicity		1-4	slot	40	
CSI reporting offset		1-4	slot	4	
T310		1-4	ms	1000	
N310		1-4		1	
T1		1-4	s	1	The UE shall be fully synchronized to cell 1 during T1
T2		1-4	s	[3.37]	
T3		1-4	s	[5.56]	
T4		1-4	s	0	
T5		1-4	s	0.61	
D1		1-4	s	0.57	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.					

Table A.5.5.5.9.1-3: Cell specific test parameters for FR2 PSCell for SSB-based beam failure detection and link recovery testing in DRX mode

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
AoA setup		Setup 1 defined in A.3.15				
Assumption for UE beams[Note 10]		Rough				

EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB0 of set q_0	Config 1-4	dB	6 Note 11	6 Note 11	-12	-12	-12
SNR_SSB1 of set q_0	Config 1-4	dB	-12	-12	-12	-12	-12
SNR_SSB of set q_1	Config 1-4	dB	0.2	0.2	20.2	20.2	20.2
SSB_RP of set q_1	Config 1-2	dBm/	-104.5	-104.5	-84.5	-84.5	-84.5
	Config 3-4	SCS	-101.5	-101.5	-81.5	-81.5	-81.5
N_{oc}	Config 1-4	dBm/120 KHz	-104.7				
goodServingCellEvaluation		dB	4				
Propagation condition			TDL-A 30ns 75Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Void
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR for SSB0 in time periods T1, T2, T3, T4 and T5 is denoted as SNR0_1, SNR0_2 and SNR0_3 respectively in figure A.5.5.5.9.1-1. The SNR for SSB1 in time periods T1, T2, T3, T4 and T5 is denoted as SNR1_1, SNR1_2 and SNR1_3 respectively in figure A.5.5.5.9.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.
Note 10: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband

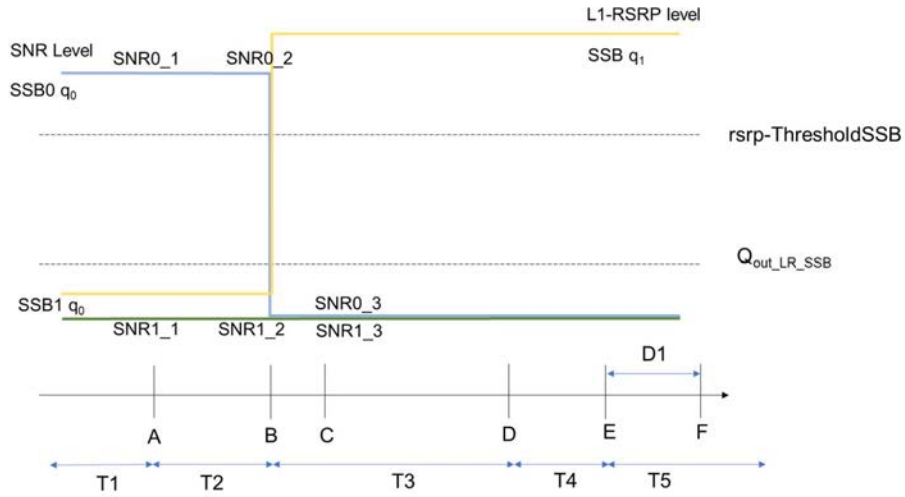

Figure A.5.5.5.9.1-1: SNR and L1-RSRP variation for SSB-based beam failure detection and link recovery testing in DRX mode for UE fulfilling relaxed measurement criterion

A.5.5.5.9.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 560+10 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.6 Active BWP switch

A.5.5.6.1 DCI-based and Timer-based Active BWP Switch

A.5.5.6.1.1 E-UTRAN – NR PSCell FR2 DL active BWP switch with non-DRX in synchronous EN-DC

A.5.5.6.1.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement defined in clause 8.6. Supported test configurations are shown in Table A.5.5.6.1.1.1-1.

The test scenario comprises of one E-UTRA PCell (Cell 1), and one NR PSCell (Cell 2) as given in Table A.5.5.6.1.1.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell is specified in Table A.5.5.6.1.1.1-3 below. The OTA related test parameters for FR2 is shown in Table A.5.5.6.1.1.1-4.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

PDCCHs indicating new transmissions shall be sent continuously on PSCell (Cell 2) to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on Cell 2 and the time duration of T2.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), and Cell 2 (PSCell) on radio channel 2 (PSCC).
- UE is configured with 2 different UE-specific downlink bandwidth parts for PSCell, BWP-1 and BWP-2, in Cell 2 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in PSCell.
- UE is configured with a *bwp-InactivityTimer* timer value for PSCell.

All cells have constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

> Time period T1 starts when a DCI format 1_1 command for PSCell DL BWP switch, sent from the test equipment to the UE, is received at the UE side in PSCell's slot # denoted *i*. The UE should switch its bandwidth part from BWP-1 to BWP-2.
>
> The UE shall be able to receive PDSCH at the beginning of the DL slot right after PSCell's DL slot ($i+T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the PSCell no later than at the beginning of the DL slot right after slot ($i+T_{BWPswitchDelay}+k1$). The UE shall be continuously scheduled on PSCell's BWP-2 starting from the beginning of the DL slot right after slot ($i+T_{BWPswitchDelay}$).

During T2, the test equipment won't transmit DCI format for PDSCH reception on PSCell(Cell 2).

During T3,

> The time period T3 starts from the slot #*j*, where j is the beginning slot of the DL subframe immediately after the slot wherein *bwp-InactivityTimer* timer expires. The UE should switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1.
>
> The UE shall be able to receive PDSCH at the beginning of the DL slot right after PSCell's DL slot ($j+T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the PSCell at latest at the beginning of the DL slot right after slot ($j+T_{BWPswitchDelay}+k1$). The UE shall be continuously scheduled on PSCell's BWP-1 starting from the beginning of the DL slot right after slot ($j+T_{BWPswitchDelay}$).

The test equipment verifies the DL BWP switch time in PSCell by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK is received.

Table A.5.5.6.1.1.1-1: DL BWP switch supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: A UE which fulfils the requirements in test case A.5.5.2.2 can skip the test cases in A.5.5.2.1.	

Table A.5.5.6.1.1.1-2: General test parameters for DL BWP switch in synchronous EN-DC

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
CP length		Normal	
DRX		OFF	For both PCell and PSCell
bwp-InactivityTimer	ms	[200]	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell2 timing offset to cell1	µs	3	Synchronous EN-DC
T1	s	[0.2]	
T2	s	[0.2]	
T3	s	[0.2]	

Table A.5.5.6.1.1.1-3: NR Cell specific test parameters for DL BWP switch in synchronous EN-DC

Parameter	Unit	Cell 2
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
$BW_{channel}$		100 MHz: $N_{RB,c}$ = 66
Active BWP ID		1, 2
Initial DL BWP Configuration		DLBWP.0.2 Note 2
Active DL BWP-1 Configuration		DLBWP.1.1 Note 2
Active DL BWP-2 Configuration		DLBWP.1.3 Note 2
Initial UL BWP Configuration		ULBWP.0.2 Note 2
Active UL BWP-1 Configuration		ULBWP.1.1 Note 2
Active UL BWP-2 Configuration		ULBWP.1.3 Note 2
PDSCH Reference measurement channel		SR.3.1 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP.1
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
TCI State		TCI.State.0
TRS Configuration		TRS.2.1 TDD
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		

EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].		

Table A.5.5.6.1.1.1-4: OTA related test parameters for DL BWP switch in synchronous EN-DC

Parameter	Unit	Cell 2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1
Assumption for UE beams Note 6		Fine
N_{oc} Note 1	dBm/15 kHz	-112
N_{oc} Note 1	dBm/SCS	-103
SS-RSRP Note 2	dBm/120 kHz Note3	-85
$\hat{E}_s/I_{ot}$	dB	18
Io Note2	dBm/95.04 MHz Note4	-56
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone. Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation		

A.5.5.6.1.1.2 Test Requirements

During T1, the UE shall start to send the ACK for PSCell from the first UL slot that occurs after the beginning of DL slot ($i+T_{BWPswitchDelay}+k1$).

During T3, the UE shall start to send the ACK for PSCell from the first UL slot that occurs after the beginning of DL slot ($j+T_{BWPswitchDelay}+k1$).

Where, *k1* is the timing between DL data receiving and acknowledgement as specified in [7].

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 8.6.2-1.

All of the above test requirements shall be fulfilled in order for the observed PSCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK in the DL slot right after DL slot ($i+Y1$), ($j+Y2$), then the UE shall use the next available uplink resource for reporting the corresponding ACK.

A.5.5.6.1.2 E-UTRAN – NR PSCell FR2 with FR2 SCell DL active BWP switch in non-DRX in synchronous EN-DC

A.5.5.6.1.2.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement defined in clause 8.6.2, and interruption requirements for NR victim cell defined in clause 8.2.1.2.7. Supported test configurations are shown in Table A.5.5.6.1.2.1-1.

The test scenario comprises of one E-UTRA PCell (Cell 1), one NR PSCell (Cell 2) and one NR SCell (Cell 3) as given in Table A.5.5.6.1.2.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell and SCell are specified in Table A.5.5.6.1.2.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

PDCCHs indicating new transmissions shall be sent continuously on PSCell (Cell 2) and SCell (Cell 3) to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on Cell 3 and the time duration of T2.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), Cell 2 (PSCell) on radio channel 2 (PSCC) and Cell 3 (SCell) on radio channel 3 (SCC).
- UE is configured with 2 different UE-specific downlink bandwidth parts for SCell, BWP-1 and BWP-2, in Cell 3 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.
- UE is configured with 1 UE-specific downlink bandwidth parts the same as initial BWP for PSCell, BWP-0 in Cell 2 before starting the test.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in SCell.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-0 in PSCell.
- UE is configured with a *bwp-InactivityTimer* timer value for SCell.

All cells have constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

> Time period T1 starts when a DCI format 1_1 command for SCell DL BWP switch, sent from the test equipment to the UE, is received at the UE side in SCell's slot # denoted *i*. The UE shall switch its bandwidth part from BWP-1 to BWP-2.
>
> The UE shall be able to receive PDSCH at the beginning of the DL slot right after PSCell's DL slot ($i+T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the PSCell no later than at the beginning of the DL slot right after slot ($i+T_{BWPswitchDelay}+k1$). The UE shall be continuously scheduled on PSCell's BWP-2 starting from the beginning of the DL slot right after slot ($i+T_{BWPswitchDelay}$).
>
> PCell(Cell 1) interruption due to BWP switch on PSCell shall occur within the BWP switch delay.
>
> PSCell(Cell 2) interruption due to BWP switch on SCell shall occur within the BWP switch delay.

During T2, the test equipment won't transmit DCI format for PDSCH reception on PSCell(Cell 2).

During T3,

The time period T3 starts from the slot #*j*, where j is the first slot of the subframe immediately after the slot wherein *bwp-InactivityTimer* timer expires. The UE shall switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1.

The UE shall be able to receive PDSCH at the beginning of the DL slot right after SCell's DL slot ($j+T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the SCell on PSCell at latest at the beginning of the DL slot right after slot ($j+T_{BWPswitchDelay}+k1$). The UE shall be continuously scheduled on SCell's BWP-1 starting from the beginning of the DL slot right after slot ($j+T_{BWPswitchDelay}$).

PCell(Cell 1) interruption due to BWP switch of PSCell shall occur within the BWP switch delay.

PSCell(Cell 2) interruption due to BWP switch of SCell shall occur within the BWP switch delay.

The test equipment verifies the DL BWP switch time in SCell by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK is received.

The test equipment verifies that potential interruption to NR PSCell is carried out in the correct time span by monitoring ACK/NACK sent in PSCell during BWP switch of SCell.

Table A.5.5.6.1.2.1-1: DL BWP switch supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: A UE which fulfils the requirements in test case A.5.5.6.1.2 can skip the test cases in A.5.5.6.1.1. Note 3: NR configuration is the same for PSCell and SCells.	

Table A.5.5.6.1.2.1-2: General test parameters for DL BWP switch in synchronous EN-DC

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2, 3	Two NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
Active SCell		Cell 3	SCell on RF channel number 3.
CP length		Normal	
DRX		OFF	
bwp-InactivityTimer	ms	[200]	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell-individual offset for cells on RF channel number 3	dB	0	Individual offset for cells on SCC.
Cell2 timing offset to cell1	μs	3	Synchronous EN-DC
Cell3 timing offset to cell2	μs	3	Synchronous cells
T1	s	0.2	
T2	s	0.2	
T3	s	0.2	

Table A.5.5.6.1.2.1-3: NR Cell specific test parameters for DL BWP switch in synchronous EN-DC

Parameter	Unit	Cell 2	Cell 3
Frequency Range		FR2	
Duplex mode		TDD	

TDD configuration		TDDConf.3.1	
$BW_{channel}$		100 MHz: $N_{RB,c}$ = 66	
Active BWP ID		0	1,2
Initial DL BWP Configuration		DLBWP.0.2	DLBWP.0.2
Active DL BWP-0 Configuration		DLBWP.0.2	N.A.
Active DL BWP-1 Configuration		N.A.	DLBWP.1.3
Active DL BWP-2 Configuration		N.A.	DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2	N.A.
Active UL BWP-0 Configuration		ULBWP.0.2	N.A.
Active UL BWP-1 Configuration		N.A.	N.A.
Active UL BWP-2 Configuration		N.A.	N.A.
PDSCH Reference measurement channel		SR.3.1 TDD	
RMSI CORESET parameters		CR.3.1 TDD	
Dedicated CORESET parameters		CCR.3.1 TDD	
OCNG Patterns		OP.1	
SSB Configuration		SSB.1 FR2	
SMTC Configuration		SMTC.1	
TCI State		TRS.2.1 TDD	
TRS Configuration		TCI.State.0	
Antenna Configuration		1x2	
Propagation Condition		AWGN	
EPRE ratio of PSS to SSS	dB	0	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3.

Table A.5.5.6.1.2.1-4: OTA related test parameters for DL BWP switch in synchronous EN-DC

Parameter	Unit	Cell 2	Cell 3
Angle of arrival configuration		Setup 1 according to clause A.3.15	
Assumption for UE beams Note 6		Fine	Fine
N_{oc} Note 1	dBm/15 kHz	-112	-112
SS-RSRP Note 2	dBm/120 kHz Note3	-85	-85
$\hat{E}_s/I_{ot}$	dB	18	18
Io Note2	dBm/95.04 MHz Note4	-56	-56

Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5:	As observed with 0dBi gain antenna at the centre of the quiet zone.
Note 6:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.5.5.6.1.2.2 Test Requirements

During T1, the UE shall start to send the ACK for SCell from the first UL slot that occurs after the beginning of DL slot ($i+T_{BWPswitchDelay}+k1$).

During T3, the UE shall start to send the ACK for SCell from the first UL slot that occurs after the beginning of DL slot ($j+T_{BWPswitchDelay}+k1$).

All of the above test requirements shall be fulfilled in order for the observed SCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

During T1, the start of the interruption of PCell during PSCell active BWP switch shall not happen outside the BWP switch delay.

During T3, the start of the interruption of PCell during PSCell active BWP switch shall not happen outside the BWP switch delay.

The interruption of PCell shall not be longer than the interruption duration specified for active BWP switch in TS36.133 Clause 7.32.2.7.

During T1, the start of the interruption of PSCell during SCell active BWP switch shall not happen outside the BWP switch delay.

During T3, the start of the interruption of PSCell during SCell active BWP switch shall not happen outside the BWP switch delay.

The interruption of PSCell shall not be longer than the interruption duration specified for active BWP switch in Clause 8.6.2.

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch interruption to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK in the DL slot right after slot ($i+T_{BWPswitchDelay}+k1$), ($j+T_{BWPswitchDelay}+k1$), then the UE shall use the next available uplink resource for reporting the corresponding ACK.

Editor's note: FFS value of k1 for type 1 and type 2 UE.

A.5.5.6.2 RRC-based Active BWP Switch

A.5.5.6.2.1 E-UTRAN – NR PSCell FR2 DL active BWP switch with non-DRX in synchronous EN-DC

A.5.5.6.2.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement for RRC-based BWP switch defined in clause 8.6.3. Supported test configurations are shown in Table A.5.5.6.2.1.1-1.

The test scenario comprises of one E-UTRA PCell (Cell 1) and one PSCell (Cell 2) as given in Table A.5.5.6.2.1.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of PSCell are specified in Table A.5.5.6.2.1.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on E-UTRA PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 (E-UTRA PCell) on radio channel 1 (PCC) and to Cell 2 (PSCell) on radio channel 2 (PSCC).
- UE has bandwidth part BWP-1 in its RRC-configuration for Cell 2 (PSCell).
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 of initial condition in PSCell.

All cells have constant signal levels throughout the test.

The test consists of 1 time period, with duration of T1.

During T1,

> If the *RRCReconfiguration* is embedded in E-UTRA RRC message, time period T1 starts when a E-UTRA RRC message *RRCConnectionReconfiguration* with updated bandwidth part configuration, sent from the test equipment to the UE, is completely received at the UE side from PCell in PSCell's slot # denoted *i*. Otherwise, i.e., if the *RRCReconfiguration* is not embedded in E-UTRA RRC message, time period T1 starts when a *RRCReconfiguration* with updated bandwidth part configuration, sent from the test equipment to the UE, is completely received at the UE side in from PSCell in PSCell's slot # denoted *i*. The UE shall reconfigure its bandwidth part with the updated bandwidth part BWP-1 of final condition.
>
> The UE shall be able to completely receive PDSCH on PSCell from the first DL slot occurs right after the beginningof PSCell's DL slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$ as defined in clause 8.6.3 and starts to report valid ACK/NACK for the PSCell from the first UL slot that occurs after the beginning of DL slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$ + k1. The UE shall be continuously scheduled on PSCell's BWP-1 starting the first DL slot that occurs right after the beginning of DL slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$.
>
> $T_{RRCprocessingDelay}$ and $T_{BWPswitchDelayRRC}$ are defined in clause 8.6.3.

The test equipment verifies the DL BWP switch time in PSCell by counting the time from the time when the RRC Reconfiguration message including updated BWP configurationis sent till the time when a vaild ACK/NACK is received.

Table A.5.5.6.2.1.1-1: DL BWP switch supported test configurations

Config	Description

1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.5.5.6.2.1.1-2: General test parameters for DL BWP switch in synchronous EN-DC

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
CP length		Normal	
DRX		OFF	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell2 timing offset to cell1	μs	3	Synchronous EN-DC
T1	s	0.2	

Table A.5.5.6.2.1.1-3: NR Cell specific test parameters for DL BWP switch in synchronous EN-DC

Parameter		Unit	Cell 2
Frequency Range			FR2
Duplex mode			TDD
TDD configuration			TDDConf.3.1
$BW_{channel}$			100 MHz: $N_{RB,c}$ = 66
Active BWP ID			1
Initial DL BWP Configuration			DLBWP.0.2
Initial UL BWP Configuration			ULBWP.0.2
Initial Condition	Active DL BWP-1 Configuration		DLBWP.1.3
	Active UL BWP-1 Configuration		ULBWP.1.3
Final Condition	Active DL BWP-1 Configuration		DLBWP.1.1
	Active UL BWP-1 Configuration		ULBWP.1.1
PDSCH Reference measurement channel			SR.3.1 TDD
RMSI CORESET parameters			CR.3.1 TDD
Dedicated CORESET parameters			CCR.3.1 TDD
OCNG Patterns			OP.1
SSB Configuration			SSB.1 FR2
SMTC Configuration			SMTC.1
TCI State			TCI.State.0
TRS Configuration			TRS.2.1 TDD
Antenna Configuration			1x2
Propagation Condition			AWGN
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			

EPRE ratio of OCNG to OCNG DMRS (Note 1)		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].

Table A.5.5.6.2.1.1-4: OTA related test parameters for BWP switching test case

Parameter		Unit	Cell 2
Angle of arrival configuration			Setup 1 according to table A.3.15
Assumption for UE beams Note 5			Fine
N_{oc} Note1	NR_TDD_FR2_A	dBm/15kHz	-112
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
N_{oc} Note1	NR_TDD_FR2_A	dBm/SCS	-103
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
SS-RSRP Note2	NR_TDD_FR2_A	dBm/SCS Note3	-85
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
$\hat{E}_s / I_{ot}$		dB	18
Io Note2	NR_TDD_FR2_A	dBm/95.04 MHz Note4	-56
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.5.5.6.2.1.2 Test Requirements

During T1, the UE shall be ready for the reception of uplink grant for PSCell from the first DL slot that occurs right after the beginning of DL slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$ and starts to report valid ACK/NACK for the PSCell from the first UL slot that occurs after the beginning of DL slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$ + k1.

Where, *k1* is the timing between DL data receiving and acknowledgement as specified in [7].

All of the above test requirements shall be fulfilled in order for the observed PSCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.6.3 Simultaneous DCI-based and Timer-based Active BWP Switch on multiple CCs

A.5.5.6.3.1 E-UTRAN – NR PSCell FR2 and NR SCell FR2 DL active BWP switch on multiple CCs in synchronous EN-DC

A.5.5.6.3.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch on multiple CCs delay requirement defined in clause 8.6. Supported test configurations are shown in Table A.5.5.6.3.1.1-1.

The test scenario comprises of one E-UTRA PCell (Cell 1), and one NR PSCell (Cell 2) and one NR SCell (Cell 3) as given in Table A.5.5.6.3.1.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell and NR SCell is specified in Table A.5.5.6.3.1.1-3 below. The OTA related test parameters for FR2 is shown in Table A.5.5.6.3.1.1-4.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

PDCCHs indicating new transmissions shall be sent continuously on PSCell (Cell 2) and SCell (Cell 3) to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on Cell 2 and Cell 3 and the time duration of T2.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), Cell 2 (PSCell) on radio channel 2 (PSCC) and Cell 3 (SCell) on radio channel 3 (SCC).
- UE is configured with 2 different UE-specific downlink bandwidth parts for PSCell and SCell, BWP-1 and BWP-2, in Cell 2 and Cell 3 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in PSCell and SCell.
- UE is configured with a *bwp-InactivityTimer* timer value for PSCell and SCell.

All cells have constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

Time period T1 starts when a DCI format 1_1 command for PSCell DL BWP switch and a DCI format 1_1 command for SCell DL BWP switch, sent from the test equipment to the UE simultaneously, are received at

the UE side in PSCell and SCell slot # denoted *i*. The UE should switch its bandwidth part from BWP-1 to BWP-2 in PSCell and SCell.

The UE shall be able to receive PDSCH at the beginning of the DL slot right after PSCell's DL slot ($i+T_{MultipleBWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the PSCell no later than at the beginning of the DL slot right after slot ($i+T_{MultipleBWPswitchDelay}+k1$). The UE shall be continuously scheduled on PSCell's BWP-2 starting from the beginning of the DL slot right after slot ($i+T_{MultipleBWPswitchDelay}$).

The UE shall be able to receive PDSCH at the beginning of the DL slot right after SCell's DL slot ($i+T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the PSCell no later than at the beginning of the DL slot right after slot ($i+T_{MultipleBWPswitchDelay}+k1$). The UE shall be continuously scheduled on PSCell's BWP-2 starting from the beginning of the DL slot right after slot ($i+T_{MultipleBWPswitchDelay}$).

During T2, the test equipment won't transmit DCI format for PDSCH reception on PSCell (Cell 2) and SCell (Cell 3).

During T3,

The time period T3 starts from the slot #*j*, where j is the beginning slot of the DL subframe immediately after the slot wherein *bwp-InactivityTimer* timer expires in PSCell and SCell. The UE should switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1 in both PSCell and SCell.

The UE shall be able to receive PDSCH on PSCell at the beginning of the DL slot right after PSCell's DL slot ($j+ T_{MultipleBWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the PSCell at latest at the beginning of the DL slot right after slot ($j+ T_{MultipleBWPswitchDelay} +k1$). The UE shall be continuously scheduled on PSCell's BWP-1 starting from the beginning of the DL slot right after slot ($j+ T_{MultipleBWPswitchDelay}$).

The UE shall be able to receive PDSCH on SCell at the beginning of the DL slot right after SCell's DL slot ($j+ T_{MultipleBWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the SCell at latest at the beginning of the DL slot right after slot ($j+ T_{MultipleBWPswitchDelay} +k1$). The UE shall be continuously scheduled on SCell's BWP-1 starting from the beginning of the DL slot right after slot ($j+ T_{MultipleBWPswitchDelay}$).

The test equipment verifies the DL BWP switch time in PSCell and SCell by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK is received.

Table A.5.5.6.3.1.1-1: DL BWP switch supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.5.5.6.3.1.1-2: General test parameters for DL BWP switch in synchronous EN-DC

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2, 3	Two NR radio channel is used for this test for PSCell and SCell
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.

Active SCell		Cell 3	SCell on RF channel number 3.
CP length		Normal	
DRX		OFF	For both PCell, PSCell and SCell
bwp-InactivityTimer	ms	200	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell-individual offset for cells on RF channel number 3	dB	0	Individual offset for cells on SCC.
Cell2 timing offset to cell1	µs	3	Synchronous EN-DC
Cell3 timing offset to cell2	µs	3	Synchronous Cells
T1	s	0.2	
T2	s	0.2	
T3	s	0.2	

Table A.5.5.6.3.1.1-3: NR Cell specific test parameters for DL BWP switch in synchronous EN-DC

Parameter	Unit	Cell 2	Cell 3
Frequency Range		FR2	FR2
Duplex mode		TDD	TDD
TDD configuration		TDDConf.3.1	TDDConf.3.1
$BW_{channel}$		100 MHz: $N_{RB,c}$ = 66	100 MHz: $N_{RB,c}$ = 66
Active BWP ID		1, 2	1, 2
Initial DL BWP Configuration		DLBWP.0.2 Note 2	DLBWP.0.2 Note 2
Active DL BWP-1 Configuration		DLBWP.1.1 Note 2	DLBWP.1.1 Note 2
Active DL BWP-2 Configuration		DLBWP.1.3 Note 2	DLBWP.1.3 Note 2
Initial UL BWP Configuration		ULBWP.0.2 Note 2	ULBWP.0.2 Note 2
Active UL BWP-1 Configuration		ULBWP.1.1 Note 2	ULBWP.1.1 Note 2
Active UL BWP-2 Configuration		ULBWP.1.3 Note 2	ULBWP.1.3 Note 2
PDSCH Reference measurement channel		SR.3.1 TDD	SR.3.1 TDD
RMSI CORESET parameters		CR.3.1 TDD	CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD	CCR.3.1 TDD
OCNG Patterns		OP.1	OP.1
SSB Configuration		SSB.1 FR2	SSB.1 FR2
SMTC Configuration		SMTC.1	SMTC.1
TCI State		TCI.State.0	TCI.State.0
TRS Configuration		TRS.2.1 TDD	TRS.2.1 TDD
Correlation Matrix and Antenna Configuration		1x2 Low	1x2 Low
EPRE ratio of PSS to SSS	dB	0	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			

EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
Propagation Condition		AWGN	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].

Table A.5.5.6.3.1.1-4: OTA related test parameters for DL BWP switch in synchronous EN-DC

Parameter	Unit	Cell 2	Cell 3
Angle of arrival configuration		Setup 1 according to clause A.3.15.1	Setup 1 according to clause A.3.15.1
Assumption for UE beams Note 6		Fine	Fine
N_{oc} Note 1	dBm/15 kHz	-112	-112
N_{oc} Note 1	dBm/SCS	-103	-103
SS-RSRP Note 2	dBm/120 kHz Note3	-85	-85
$\hat{E}_s/I_{ot}$	dB	18	18
Io Note2	dBm/95.04 MHz Note4	-56	-56

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone

Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone.

Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.5.5.6.3.1.2 Test Requirements

During T1, the UE shall start to send the ACK for PSCell and SCell from the first UL slot that occurs after the beginning of DL slot ($i+T_{MultipleBWPswitchDelay}+k1$).

During T3, the UE shall start to send the ACK for PSCell and SCell from the first UL slot that occurs after the beginning of DL slot ($j+T_{MultipleBWPswitchDelay}+k1$).

Where, *k1* is the timing between DL data receiving and acknowledgement as specified in [7].

Depending on UE capability *bwp-SwitchingDelay* and *bwp-SwitchingMultiCCs-r16* [2], UE shall finish BWP switch within the time duration $T_{MultipleBWPswitchDelay}$ defined in TS 38.133 caluse 8.6.2A and 8.6.2B

All of the above test requirements shall be fulfilled in order for the observed PSCell and SCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK in the DL slot right after DL slot ($i+Y1$), ($j+Y2$), then the UE shall use the next available uplink resource for reporting the corresponding ACK.

A.5.5.6.4 SCell dormancy switch

A.5.5.6.4.1 E-UTRAN – NR FR2 PSCell SCell dormancy switch of single FR2 SCell inside active time

A.5.5.6.4.1.1 Test Purpose and Environment

The purpose of this test is to verify

1) the interruption due to RRM and CSI measurement during SCell dormancy on spCell is within the limits 1) the interruption due to RRM and CSI measurement during SCell dormancy on spCell is within the limits specified in clause 8.2.1.2.15.2 and 8.2.1.2.15.3 for NR victim cell, and

2) the SCell dormancy switch delay is within the requirement defined in clause 8.6.2, and the SCell dormancy switch interruption is within the limits defined in clause 8.2.1.2.15.1 for NR victim cell.

Supported test configurations are shown in Table A.5.5.6.4.1.1-1.

The test scenario comprises of one E-UTRA PCell (Cell 1), one NR PSCell (Cell 2) and one NR SCell (Cell 3) as given in Table A.5.5.6.4.1.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell and SCell are specified in Table A.5.5.6.4.1.1-3 below.

The tests consist of three consecutive time periods T1, T2, and T3, respectively. All cells have constant signal levels throughout the test. The UE is continuously scheduled in PCell and PSCell throughout the test

Before the test starts,

- UE is connected to Cell 1 (PCell), Cell 2 (PSCell) and Cell 3 (SCell).
- UE is configured with a single UE-specific downlink bandwidth part, BWP-0, for Cell 2. BWP-0 includes the bandwidth of the initial DL BWP and SSB.
- UE is configured with one non-dormant and one dormant UE-specific downlink bandwidth part, BWP-0 and BWP-1, respectively, for Cell 3. BWP-0 includes the bandwidth of the initial DL BWP and SSB.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP in Cell 3 is BWP-0.
- UE is indicated that firstOutsideActiveTimeBWP-Id that the active DL BWP after when switching from dormant BWP in Cell 3 is BWP-0

T1 starts at the point in time at which the UE receives a DCI with dormancy indication on PDCCH in PSCell at the antenna connector, in a slot # denoted *m*, pertaining to dormancy indication for switching SCell from non-dormancy to dormancy. The UE shall complete switching of the SCells to dormancy by the end of slot *m* + ceil($T_{BWPswitchDelay}$/NR slot length) + 1 in Test1, and slot *m* + ceil($T_{BWPswitchDelay}$/NR slot length) + 2 in Test2, as specified in clause 8.6.2. Any PSCell interruptions due to the switching between non-dormant and dormant BWPs shall fulfill requirements in clause 8.2.1.2.15.1 for NR victim cell. The test equipment verifies that interruptions due to switching from non-dormancy to dormancy are within the requirements by analysing HARQ feedback transmitted in PSCell for PSCell.

During T2, the UE is carrying out CSI and RRM measurements on dormant SCell. Any interruptions due to CSI and RRM measurements shall fulfill requirements in clause 8.2.1.2.15.2 and 8.2.1.2.15.3 for NR victim cell. The test equipment verifies that the interruptions are within the allowed percentages by counting ACK/NACKs in PSCell. At the end of T2, the test equipment transmits a DCI with dormancy indication on PDCCH in PSCell carrying a dormany indication for switching SCell from dormancy to non-dormancy.

T3 starts at the point in time at which the UE receives a DCI with dormancy indication on PDCCH in PSCell at the antenna connector, in a slot # denoted *n*, pertaining to dormancy indication for switching SCell from dormancy to non-dormancy. The UE shall complete switching of the SCell to non-dormancy by the end of slot *n* + ceil($T_{BWPswitchDelay}$/NR slot length) + 1 in Test1, and slot *n* + ceil($T_{BWPswitchDelay}$/NR slot length) + 2 in Test2, as

specified in clause 8.6.2. Any PSCell interruptions due to the switching between non-dormant and dormant BWPs shall fulfill requirements in clause 8.2.1.2.15.1 for NR victim cell. The test equipment verifies that interruptions due to switching from dormancy to non-dormancy are within the requirements by analysing HARQ feedback transmitted in PSCell for PSCell. PDCCHs indicating new transmissions shall be sent continuously on SCell from the slot right after n + ceil($T_{BWPswitchDelay}$/NR slot length) + 1 in Test1, and slot n + ceil($T_{BWPswitchDelay}$/NR slot length) + 2 in Test2. The test equipment verifies the SCell dormancy switch delay by counting the slots from slot n till an ACK/NACK for SCell is received.

There are two subtests in this test. In Subtest 1 the DCI format 1_1 command for SCell dormancy switch is transmitted within the first 3 OFDM symbols in a slot, and in Subtest 2 the DCI format 1_1 command for SCell dormancy switch is transmitted after the first 3 OFDM symbols in a slot. A UE that only supports triggering during within the first three OFDM symbols of a slot shall only undergo Test1, whereas a UE that supports triggering also in remaining OFDM symbols of a slot shall undergo Test1 and Test2.

Table A.5.5.6.4.1.1-1: Dormancy switch supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: A UE which fulfils the requirements in test case in clause A.5.5.6.4.2 can skip the test cases in current clause A.5.5.6.4.1. Note 3: NR configuration is the same for PSCell and SCells.	

Table A.5.5.6.4.1.1-2: General test parameters for Dormancy switch in synchronous EN-DC

Parameter	Unit	Value		Comment
		Subtest 1	Subtest 2	
E-UTRA RF Channel Number		1		One E-UTRA radio channel is used for this test
NR RF Channel Number		2, 3		Two NR radio channel is used for this test
Active PCell		Cell 1		PCell on RF channel number 1.
Active PSCell		Cell 2		PSCell on RF channel number 2.
Active SCell		Cell 3		SCell on RF channel number 3.
CP length		Normal		
DRX		OFF		
Measurement gap pattern Id		OFF		
bwp-InactivityTimer	ms	500		
Cell-individual offset for cells on RF channel number 1	dB	0		Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0		Individual offset for cells on PSCC.
Cell-individual offset for cells on RF channel number 3	dB	0		Individual offset for cells on SCC.
Cell2 timing offset to cell1	µs	3		Synchronous EN-DC
Cell3 timing offset to cell2	µs	0		Synchronous cells
Triggering DCI format		DCI 1_1		Triggering DCI format for triggering during active time
OFDM symbol range in slot for transmission of DCI with dormancy indication		0 – 2	3 – 11	Test1 is based on that triggering DCI is received within the first three OFDM symbols of a slot. Test2 is based on that the triggering DCI is received later than within the first three OFDM symbols of a slot.
T1	s	0.2		
T2	s	5		
T3	s	0.2		

Table A.5.5.6.4.1.1-3: NR Cell specific test parameters for Dormancy switch in synchronous EN-DC

Parameter	Unit	Subtest 1		Subtest 2	
		Cell 2	Cell 3	Cell 2	Cell 3
Frequency Range		FR2		FR2	
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$		100 MHz: $N_{RB,c}$ = 66		100 MHz: $N_{RB,c}$ = 66	
Active BWP ID		0	0	0	0
Initial DL BWP Configuration		DLBWP.0.2	DLBWP.0.2	DLBWP.0.2	DLBWP.0.2
Active DL BWP-0 Configuration		DLBWP.1.1	DLBWP.1.1	DLBWP.1.1	DLBWP.1.1
Active DL BWP-1 Configuration		NA	DLBWP.1.2	NA	DLBWP.1.2
Initial UL BWP Configuration		ULBWP.0.2	ULBWP.0.2	ULBWP.0.2	ULBWP.0.2
Active UL BWP-0 Configuration		ULBWP.1.1	ULBWP.1.1	ULBWP.1.1	ULBWP.1.1
Active UL BWP-1 Configuration		NA	ULBWP.1.2	NA	ULBWP.1.2
PDSCH Reference measurement channel		SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET parameters		CR.3.1 TDD		CR.3.1 TDD	
Dedicated CORESET parameters		CCR.3.1 TDD		CCR.3.2 TDD	CCR.3.1 TDD
OCNG Patterns		OP.1		OP.1	
SSB Configuration		SSB.1 FR2		SSB.1 FR2	
SMTC Configuration		SMTC.1		SMTC.1	
TCI State		TCI.State.0		TCI.State.0	
TRS Configuration		TRS.2.1 TDD		TRS.2.1 TDD	
CSI-RS for CSI reporting		CSI-RS.3.1 TDD		CSI-RS.3.1 TDD	
CSI reporting periodicity	slots	640		640	
SCell measurement cycle (measCycleSCell)	ms	640		640	
Antenna Configuration		1x2		1x2	
Propagation Condition		AWGN		AWGN	
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3.

Table A.5.5.6.4.1.1-4: OTA related test parameters for Dormancy switch in synchronous EN-DC

Parameter	Unit	Cell 2	Cell 3
Angle of arrival configuration		Setup 1 according to clause A.3.15	

N_{oc} Note 1	dBm/15 kHz	-112	-112
SS-RSRP Note 2	dBm/120 kHz Note3	-85	-85
$\hat{E}_s/I_{ot}$	dB	18	18
Io Note2	dBm/95.04 MHz Note4	-56	-56

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone.

A.5.5.6.4.1.2 Test Requirements

During T1, any interruption on PSCell due to dormancy switching of SCell shall be within the requirement specified in in clause 8.2.1.2.15.1 for NR victim cell.

During T2, interruptions on PSCell due to CSI and RRM measurements on dormant SCell shall be within the interruption rate requirements specified in 8.2.1.2.15.1 for NR victim cell.

During T3, any interruption on PSCell due to dormancy switching of SCell shall be within the requirement specified in in clause 8.2.1.2.15.1 for NR victim cell. Monitoring of PDCCH for SCell in PSCell shall be resumed within the dormancy switching time specified in clause 8.6.2A.

For an event to be considered to be correct, all requirements above have to be fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.6.4.2 E-UTRAN – NR FR1 PSCell SCell dormancy switch of two FR2 SCells outside active time

A.5.5.6.4.2.1 Test Purpose and Environment

The purpose of this test is to verify the NR SCell dormant BWP switch delay requirement defined in clause 8.6.2A.1, interruption requirements due to the NR SCell dormant BWP switch defined in clause 8.2.1.2.15.1 for NR victim cells and in clause 7.32.2.14.1 of TS36.133 for E-UTRA victim cell, respectively, and interruption requirements due to CSI and RRM measurements on the NR dormant SCells defined in clauses 8.2.1.2.15.2 and 8.2.1.2.15.3 for NR victim cells and in clause 7.32.2.14.2 of TS36.133 for E-UTRA victim cell, respectively. Supported test configurations are shown in Table Table A.5.5.6.4.2.1-1.

The general test parameters are given in Table A.5.5.6.4.2.1-2, and NR cell specific test parameters are given in Table A.5.5.6.4.2.1-3 and Table A.5.5.6.4.2.1-4 below. And the E-UTRAN cell specific test parameters can refer to Table A.3.7.2.1-1.

The test scenario comprises of one E-UTRA PCell (Cell 1), one NR FR1 PSCell (Cell 2), and three NR FR2 SCells (Cell 3-5) as given in Table A.5.5.6.4.2.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell and SCell are specified in Table A.5.5.6.4.2.1-3 and Table A.5.5.6.4.2.1-4 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1), PSCell (Cell 2), and SCell (Cell 5) to ensure that the UE will have ACK/NACK sending except the time before T1 and during T3. PDCCHs indicating new transmissions shall be sent continuously on SCells (Cell 3,4) to ensure that the UE would have ACK/NACK

sending except for the time duration when BWP is switching on the cells and the time duration of when active BWP of the cell is dormant.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), Cell 2 (PSCell) on radio channel 2 (PSCC), and Cell 3-5 (SCells) on radio channels 3-5 (SCCs), respectively.
- UE is configured with 2 different UE-specific downlink BWPs for Cell 3 and Cell 4, BWP-1 and BWP-2. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB. Here, BWP-2 on Cell 3 and Cell 4 is configured as dormant BWP.
- UE is configured with 1 UE-specific downlink BWP the same as initial BWP for Cell 3 and Cell 4.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in Cell 3 and Cell 4.
- UE is configured with DRX.
- UE is configured to monitor PDCCH for DCI format 2_6 from Cell 2 at *ps-Offset* before the start of *onDuration*. *ps-Offset* is selected to correspond to the dormancy switching time specified in clause 8.6.2A.

All cells have constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, T3, and T4, respectively.

During T1,

Time period T1 starts when a DCI format 2_6 command for Cell 3 and Cell 4 DL BWP switch to BWP-2, sent from the test equipment to the UE, is received at the UE side in PSCell's slot # denoted *i*. The UE shall switch its bandwidth part from BWP-1 to BWP-2.

The UE shall be able to receive PDSCH at the beginning of the DL slot right after PSCell's DL slot (i+ $T_{MultipleBWPswitchDelay}$+X) as defined in clause 8.6.2A.2. The UE shall be continuously scheduled on the cell starting from the beginning of the DL slot right after slot (i+ $T_{MultipleBWPswitchDelay}$+X).

The UE shall be able to receive PDSCH at the beginning of the DL slot right after SCell(Cell 5)'s DL slot (i+ $T_{MultipleBWPswitchDelay}$+X) as defined in clause 8.6.2A.2. The UE shall be continuously scheduled on the cell starting from the beginning of the DL slot right after slot (i+ $T_{MultipleBWPswitchDelay}$+X).

PCell(Cell 1) interruption due to dormant BWP switch on PSCell shall occur within the dormant BWP switch delay.

SCell(Cell 5) interruption due to dormant BWP switch on SCell(Cell 5) shall occur within the dormant BWP switch delay.

During T2,

Time period T2 starts when dormant BWP switch latency requirement test is completed. The test equipement shall schedule PDSCH every slot.

The UE shall be able to report ACK/NACK corresponding to the scheduled PDSCH to PSCell except for the allowed times as defined in clauses 8.2.1.2.15.2 and 8.2.1.2.15.3.

The UE shall be able to report ACK/NACK corresponding to the scheduled PDSCH to PCell except for the allowed times as defined in clause 7.32.2.14.2 of TS36.133.

During T3,

Time period T3 starts when interruption due to SSB based RRM measurement and CSI measurement requirements test is completed. Test equipment shall not transmit PDCCH, hence, the UE doesn't monitor PDCCH except DCI format 2_6 based PDCCH.

During T4,

Time period T4 starts when a DCI format 2_6 command for Cell 3 and Cell 4 DL BWP switch to BWP-1, sent from the test equipment to the UE, is received at the UE side in PSCell's slot # denoted *j*. The UE shall switch its bandwidth part from BWP-2 to BWP-1.

The UE shall be able to receive PDSCH at the beginning of the DL slot right after PSCell's DL slot ($j+ T_{MultipleBWPswitchDelay}+X$) as defined in clause 8.6.2A.2. The UE shall be continuously scheduled on the cell starting from the beginning of the DL slot right after slot ($j+ T_{MultipleBWPswitchDelay}+X$).

The UE shall be able to receive PDSCH at the beginning of the DL slot right after all SCell's (Cell 3,4,5) DL slot ($j+ T_{MultipleBWPswitchDelay}+X$) as defined in clause 8.6.2A.2. The UE shall be continuously scheduled on the cells starting from the beginning of the DL slot right after slot ($j+ T_{MultipleBWPswitchDelay}+X$).

PCell(Cell 1) interruption due to dormant BWP switch on PSCell shall occur within the dormant BWP switch delay.

SCell(Cell 5) interruption due to dormant BWP switch on SCell(Cell 5) shall occur within the dormant BWP switch delay.

Table A.5.5.6.4.2.1-1: Supported test configurations for EN-DC DCI 2_6 based Domant BWP Switch on Multiple NR FR2 SCells

Config	Cell 1	Cell 2	Cell 3, Cell 4, Cell 5	DCI 2_6 of Cell 2
1	LTE FDD	15kHz SSB SCS, FDD	120kHz SSB SCS, TDD	within 3 OFDM symbols
2	LTE FDD	15kHz SSB SCS, TDD	120kHz SSB SCS, TDD	within 3 OFDM symbols
3	LTE FDD	30kHz SSB SCS, TDD	120kHz SSB SCS, TDD	within 3 OFDM symbols
4	LTE TDD	15kHz SSB SCS, FDD	120kHz SSB SCS, TDD	within 3 OFDM symbols
5	LTE TDD	15kHz SSB SCS, TDD	120kHz SSB SCS, TDD	within 3 OFDM symbols
6	LTE TDD	30kHz SSB SCS, TDD	120kHz SSB SCS, TDD	within 3 OFDM symbols
7	LTE FDD	15kHz SSB SCS, FDD	120kHz SSB SCS, TDD	after 3 OFDM symbols
8	LTE FDD	15kHz SSB SCS, TDD	120kHz SSB SCS, TDD	after 3 OFDM symbols
9	LTE FDD	30kHz SSB SCS, TDD	120kHz SSB SCS, TDD	after 3 OFDM symbols
10	LTE TDD	15kHz SSB SCS, FDD	120kHz SSB SCS, TDD	after 3 OFDM symbols
11	LTE TDD	15kHz SSB SCS, TDD	120kHz SSB SCS, TDD	after 3 OFDM symbols
12	LTE TDD	30kHz SSB SCS, TDD	120kHz SSB SCS, TDD	after 3 OFDM symbols
Note 1: 10 MHz bandwidth for Cell 2 with 15kHz SSB SCS. Note 2: 40 MHz bandwidth for Cell 2 with 30kHz SSB SCS. Note 3: 100 MHz bandwidth for Cell 3,4,5. Note 4: The UE is only required to be tested in one of the supported test configurations.				

Table A.5.5.6.4.2.1-2: General test parameters for EN-DC DCI 2_6 based Domant BWP Switch on Multiple NR FR2 SCells

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRAN carrier frequenciy is used.
NR RF Channel Number		2,3,4,5	Four NR radio channels are used for this test. RF channel number 2 is in FR 1 and RF channel numbers 3,4,5 are in a band where intra-band FR2 CA is allowed.
Active PCell		Cell 1	Primary cell on NR RF channel number 1.

Active PSCell		Cell 2	Primary SCG cell on NR RF channel number 2.
Configured activated SCell		Cell 3,4,5	Configured activated secondary cell on NR RF channel numbers 3,4,5.
CP length		Normal	
DRX		DRX.3	As specified in clause A.3.3
ps-Offset		Depending on UE capability	Monitoring of DCI 2_6 ahead of start of drx-onDurationTimer. Value of ps-Offset shall correspond to SCell dormancy switching time for switching of two SCells, as specified in clause 8.6.2A. Actual value depends on reported UE capabilities.
ps-WakeUp		true	Wake up for onDuration in case DCI format 2_6 is not detected.
SCell measurement cycle (measCycleSCell)	ms	160	
Cell2 timing offset to cell1	µs	3	
Cell3,4,5 timing offset to cell1	µs	3	
Timing offset among cell3,4,5	µs	0	
T1	s	0.2	During this time cell 3,4 switch to dormancy from non-dormancy.
T2	s	10	During this time cell 3,4 are dormant.
T3	S	0.1	During this time PDCCH is not transmitted from all cells.
T4	s	0.2	During this time cell 3,4 switch to non-dormancy from dormancy.

Table A.5.5.6.4.2.1-3: Cell specific test parameters for EN-DC DCI 2_6 based Domant BWP Switch on Multiple NR FR2 SCells

Parameter		Unit	Cell 2	Cell 3,4	Cell 5
Frequency range			FR1	FR2	FR2
Duplex mode			FDD	TDD	TDD
TDD configuration	Config 1,4,7,10		NA	TDDConf.3.1	TDDConf.3.1
	Config 2,5, 8,11		TDDConf.1.1	TDDConf.3.1	TDDConf.3.1
	Config 3,6,9,12		TDDConf.2.1	TDDConf.3.1	TDDConf.3.1
$BW_{channel}$	Config 1,2,4,5,7,8,10,11	MHz	10: $N_{RB,c}$ = 52	100: $N_{RB,c}$ = 66	100: $N_{RB,c}$ = 66
	Config 3,6,9,12	MHz	40: $N_{RB,c}$ = 106	100: $N_{RB,c}$ = 66	100: $N_{RB,c}$ = 66
SSB Configuration	Config 1,2,4,5,7,8,10,11		SSB.1 FR1	SSB.1 FR2	SSB.1 FR2
	Config 3,6,9,12		SSB.2 FR1	SSB.1 FR2	SSB.1 FR2
Downlink initial BWP Configuration			DLBWP.0.2	DLBWP.0.2	DLBWP.0.2
Active (non-dormant) DL BWP-1 Configuration			NA	DLBWP.1.1	NA
Active (dormant) DL BWP-2 Configuration			NA	DLBWP.1.1	NS
Uplink initial BWP Configuration			ULBWP.0.2	ULBWP.0.2	ULBWP.0.2

Active Uplink BWP-1 Configuration			NA	ULBWP.1.1	NA
Active Uplink BWP-2 Configuration			NA	ULBWP.1.1	NA
SMTC Configuration			SMTC.1	SMTC.1	SMTC.1
TRS configuration	Config 1,4,7,10		TRS.1.1 FDD	TRS.2.1 TDD	TRS.2.1 TDD
	Config 2,5, 8,11		TRS.1.1 TDD	TRS.2.1 TDD	TRS.2.1 TDD
	Config 3,6,9,12		TRS.1.2 TDD	TRS.2.1 TDD	TRS.2.1 TDD
TCI state			TCI.State.0	TCI.State.0	TCI.State.0
PDSCH Reference measurement channel	Config 1,4,7,10		SR.1.1 FDD	SR.3.1 TDD	SR.3.1 TDD
	Config 2,5, 8,11		SR.1.1 TDD	SR.3.1 TDD	SR.3.1 TDD
	Config 3,6,9,12		SR.2.1 TDD	SR.3.1 TDD	SR.3.1 TDD
RMSI CORESET Parameters	Config 1,4,7,10		CR.1.1 FDD	CR.3.1 TDD	CR.3.1 TDD
	Config 2,5, 8,11		CR.1.1 TDD	CR.3.1 TDD	CR.3.1 TDD
	Config 3,6,9,12		CR.2.1 TDD	CR.3.1 TDD	CR.3.1 TDD
Dedicated CORESET Parameters for scheduling PDCCH	Config 1,4		CCR.1.1 FDD	CCR.3.1 TDD	CCR.3.1 TDD
	Config 7,10		CCR.1.5 FDD	CCR.3.1 TDD	CCR.3.1 TDD CCR.3.1 TDD
	Config 2,5		CCR.1.1 TDD	CCR.3.1 TDD	CCR.3.1 TDD
	Config 8,11		CCR.1.5 TDD	CCR.3.1 TDD	CCR.3.1 TDD
	Config 3,6		CCR.2.1 TDD	CCR.3.1 TDD	CCR.3.1 TDD
	Config 9,12		CCR.2.3 TDD	CCR.3.1 TDD	CCR.3.1 TDD
Dedicated CORESET Parameters for DCI 2_6	Config 1,4		CCR.1.1 FDD	NA	NA
	Config 7,10		CCR.1.5 FDD	NA	NA
	Config 2,5		CCR.1.1 TDD	NA	NA
	Config 8,11		CCR.1.5 TDD	NA	NA
	Config 3,6		CCR.2.1 TDD	NA	NA
	Config 9,12		CCR.2.3 TDD	NA	NA
CSI-RS configuration			NA	CSI-RS.3.1 TDD	NA
OCNG Patterns			OP.1		
EPRE ratio of PSS to SSS		dB	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
Propagation conditions			N/A Link only, see clause A.3.7A	AWGN	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Table A.5.5.6.4.2.1-4: OTA related test parameters for EN-DC DCI 2_6 based Domant BWP Switch on Multiple NR FR2 SCells

Parameter[Note 6]	Unit	Cell 2	Cell 3,4	Cell 5
Angle of arrival configuration		N/A Link only, see clause A.3.7A	Setup 1 defined in clause A.3.15.1	
Assumption for UE beams [Note 7]			Fine	Fine
N_{oc} [Note1]	dBm/15kHz[Note4]		-111.7	-111.7
N_{oc} [Note1]	dBm/SCS[Note3]		-102.7	-102.7
$\hat{E}_s / N_{oc}$	dB		7	7
SS-RSRP[Note2]	dBm/SCS [Note4]		-95.7	-95.7
$\hat{E}_s / I_{ot}$	dB		7	7
Io[Note2]	dBm/95.04 MHz [Note4]		-65.9	-65.9

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6: All parameters apply for configuration 1 and 2
Note 7: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.

A.5.5.6.4.2.2 Test Requirements

During T1, the UE shall start to send the ACK for PSCell from the first UL slot that occurs after the beginning of PSCell's DL slot (i+ $T_{MultipleBWPswitchDelay}$+X) as defined in clause 8.6.2A.2.

During T2, the UE shall transmit at least 98.5% of ACK/NACK on NR PCell.

During T4, the UE shall start to send the ACK for PSCell from the first UL slot that occurs after the beginning of PSCell's DL slot (j+ $T_{MultipleBWPswitchDelay}$+X) as defined in clause 8.6.2A.2.

The rate of correct events observed during repeated tests shall be at least 90%.

During T1, the start of the interruption of PCell and SCell (Cell 5) during dormant BWP switch on SCells (Cell 3,4) shall not happen outside the dormant BWP switch delay.

During T1, the start of the interruption of PCell and SCells (Cell 3,4,5) during dormant BWP switch on SCells (Cell 3,4) shall not happen outside the dormant BWP switch delay.

A.5.5.6.5 Simultaneous RRC-based Active BWP Switch on multiple CCs

A.5.5.6.5.1 E-UTRAN – NR PSCell FR2 and NR SCell FR2 DL active BWP switch on multiple CCs with non-DRX in synchronous EN-DC

A.5.5.6.5.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement for simultaneous RRC-based BWP switch on multiple CCs defined in clause 8.6.3A. Supported test configurations are shown in Table A.5.5.6.5.1.1-1.

The test scenario comprises of one E-UTRA PCell (Cell 1) and one NR PSCell (Cell 2) and one NR SCell (Cell 3) as given in Table A.5.5.6.5.1.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell and NR SCell are specified in Table A.5.5.6.5.1.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), to Cell 2 (PSCell) on radio channel 2 (PSCC) and to Cell 3 (SCell) on radio channel 3.
- UE has bandwidth part BWP-1 in its RRC-configuration for Cell 2 (PSCell) and Cell 3 (SCell).
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 of initial condition in Cell 2 (PSCell) and Cell 3 (SCell).

All cells have constant signal levels throughout the test.

The test consists of 1 time period, with duration of T1.

During T1,

Time period T1 starts when a *RRCReconfiguration* with updated bandwidth part configuration in Cell 2 and Cell3, sent from the test equipment to the UE, is received at the UE side in PSCell's slot # denoted *i*. The UE shall reconfigure its bandwidth part with the updated bandwidth part BWP-1 of final condition in Cell 2 and Cell 3.

The UE shall be able to completely receive PDSCH on Cell 2 and Cell 3 at the beginning of the DL slot right after PSCell's DL slot ($i+\frac{T_{RRCprocessingDelay}+T_{BWPswitchDelayRRC}+D_{RRC}}{NR\ slot\ length}$) as defined in clause 8.6.3A and be ready for the reception of uplink grant for the PSCell no later than at the beginning of the DL slot right after slot ($i+\frac{T_{RRCprocessingDelay}+T_{BWPswitchDelayRRC}+D_{RRC}}{NR\ slot\ length}$). The UE shall be continuously scheduled on Cell 2's BWP-1and Cell 3's BWP-1 starting from the beginning of the DL slot right after slot ($i+\frac{T_{RRCprocessingDelay}+T_{BWPswitchDelayRRC}+D_{RRC}}{NR\ slot\ length}$).

$T_{RRCprocessingDelay}$, $T_{BWPswitchDelayRRC}$ and D_{RRC} are defined in clause 8.6.3A.

The test equipment verifies the DL BWP switch time in Cell 2 and Cell 3 by counting the time from the time when the RRC Reconfiguration message including updated BWP configuration is sent till the time when RRC Reconfiguration Complete message is received.

Table A.5.5.6.5.1.1-1: DL BWP switch supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.5.5.6.5.1.1-2: General test parameters for DL BWP switch in synchronous EN-DC

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2, 3	Two NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1
Active PSCell		Cell 2	PSCell on RF channel number 2

Active SCell		Cell 3	SCell on RF channel number 3
CP length		Normal	
DRX		OFF	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell-individual offset for cells on RF channel number 3	dB	0	Individual offset for cells on SCC.
Cell2 timing offset to cell1	µs	3	Synchronous EN-DC
Cell3 timing offset to cell2	µs	3	Synchronous Cells
T1	s	[0.2]	

Table A.5.5.6.5.1.1-3: NR Cell specific test parameters for DL BWP switch in synchronous EN-DC

Parameter		Unit	Cell 2	Cell 3
Frequency Range			FR2	FR2
Duplex mode			TDD	TDD
TDD configuration			TDDConf.3.1	TDDConf.3.1
$BW_{channel}$			100 MHz: $N_{RB,c}$ = 66	100 MHz: $N_{RB,c}$ = 66
Active BWP ID			1	1
Initial DL BWP Configuration			DLBWP.0.2	DLBWP.0.2
Initial UL BWP Configuration			ULBWP.0.2	ULBWP.0.2
Initial Condition	Active DL BWP-1 Configuration		DLBWP.1.3	DLBWP.1.3
	Active UL BWP-1 Configuration		ULBWP.1.3	ULBWP.1.3
Final Condition	Active DL BWP-1 Configuration		DLBWP.1.1	DLBWP.1.1
	Active UL BWP-1 Configuration		ULBWP.1.1	ULBWP.1.1
PDSCH Reference measurement channel			SR.3.1 TDD	SR.3.1 TDD
RMSI CORESET parameters			CR.3.1 TDD	CR.3.1 TDD
Dedicated CORESET parameters			CCR.3.1 TDD	CCR.3.1 TDD
OCNG Patterns			OP.1	OP.1
SSB Configuration			SSB.1 FR2	SSB.1 FR2
SMTC Configuration			SMTC.1	SMTC.1
TCI State			TCI.State.0	TCI.State.0
TRS Configuration			TRS.2.1 TDD	TRS.2.1 TDD
Antenna Configuration			1x2	1x2
Propagation Condition			AWGN	AWGN
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].

Table A.5.5.6.5.1.1-4: OTA related test parameters for BWP switching test case

Parameter	Unit	Cell 2	Cell 3
Angle of arrival configuration		Setup 1 according to table A.3.15	Setup 1 according to table A.3.15
Assumption for UE beams Note 5		Fine	Fine
N_{oc} Note1	dBm/15kHz	-112	-112
N_{oc} Note1	dBm/SCS	-103	-103
SS-RSRP Note2	dBm/SCS Note3	-85	-85
$\hat{E}_s/I_{ot}$	dB	18	18
Io Note2	dBm/95.04 MHz Note4	-56	-56

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone

Note 5: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.5.5.6.5.1.2 Test Requirements

During T1, the UE shall be ready for the reception of uplink grant for PSCell and SCell in the beginning of the DL slot right after slot $(i+\frac{T_{RRC processing Delay}+T_{BWP switch Delay RRC}+D_{RRC}}{NR\ slot\ length})$.

All of the above test requirements shall be fulfilled in order for the observed PSCell and SCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.7 PSCell addition and release delay

A.5.5.7.1 Addition and Release Delay of NR PSCell

A.5.5.7.1.1 Test purpose and environment

The purpose of this test is to verify that the NR PSCell addition and release delays under EN-DC are within the requirements stated in clause 7.31.2 of TS 36.133 [15] for the case when the PSCell is unknown by the UE at the time of addition.

Supported test configurations are shown in A.5.5.7.1.1-1. The test parameters for the E-UTRA cell are given in Table A.3.7.2.2-1. The E-UTRA cell once set up is not changed across time.

The test parameters for NR cell are given in Tables A.5.5.7.1.1-2, cell-specific parameters in A.5.5.7.1.1-3 and OTA parameters in A.5.5.7.1.1-4 below. The test consists of four successive time periods with duration of T1, T2, T3 and T4. There are two carriers each with one cell. Before the test starts the UE is connected to Cell 1 (E-UTRA PCell) on radio channel 1 (PCC) but is not aware of Cell 2 (NR PSCell) on radio channel 2. The UE is only monitoring the PCC. During T1 only Cell1 is known to the UE.

The test system shall send a RRC message to the UE to add PSCell (Cell 2) on radio channel 2. The RRC message (to add PSCell) also includes a request for the UE to start periodic CSI reporting for the PSCell after the PSCell has been successfully added. The RRC message to add PSCell shall be sent to the UE during period T1. The point in time at which the RRC message to add PSCell (Cell2) is received at the UE antenna connector defines the start of period T2.

The test system shall observe the periodic reporting of CSI for PSCell during T3. The point in time at which the UE has sent PRACH to the PSCell (Cell 2) defines the start of period T3.

The test system shall send a RRC message to the UE to release PSCell (Cell 2) on radio channel 2. The RRC message to release PSCell (Cell2) shall be sent to the UE during period T3, after the UE has sent at least one CQI report with non-zero CQI index for PSCell (Cell 2). The point in time at which the RRC message to release PSCell (Cell2) is received at the UE antenna connector defines the start of period T4.

Table A.5.5.7.1.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
1	LTE FDD, NR TDD, SSB SCS 240 kHz, data SCS 120 kHz, BW 100 MHz
2	LTE TDD, NR TDD, SSB SCS 240 kHz, data SCS 120 kHz, BW 100 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.5.5.7.1.1-2: General Test Parameters for PSCell Addition and Release

Parameter		Unit	Value	Comment
RF Channel Number			1, 2	Two radio channels are used for this test. One for E-UTRA cell and second for NR Cell
Initial Condition	Active PCell		Cell1	PCell on RF channel number 1.
	Neighbour cell		Cell2	Neighbour cell on RF channel number 2.
Final Condition	Active PCell		Cell1	PCell on RF channel number 1.
	Neighbour Cell		Cell2	PSCell released on RF channel number 2.
B1	Hysteresis	dB	0	Hysteresis for evaluation of event B1.
	Threshold RSRP	dBm	-118	Actual RSRP threshold for event B1. Needs to take absolute accuracy tolerance in clause 9.1.11.1 into account plus margin.
	Time to Trigger	s	0	
DRX			OFF	Continuous monitoring of primary cell
PRACH configuration on cell2			FR2 configuration 2	Captured in A.3.8.3.2

Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on primary component carrier.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on carrier frequency of cell2.
T1	s	1	During this time the PCell shall be known and cell2 shall be unknown.
T2	s	1	During this time the UE adds the PSCell.
T3	s	1	During this time the UE sends CSI reports for PSCell.
T4	s	1	During this time the UE releases the PSCell.

Table A.5.5.7.1.1-3: Cell Specific Parameters for PSCell Addition and Release

Parameter	Unit	Config	Test			
			T1	T2	T3	T4
E-UTRA Channel Number		1,2	1			
NR Channel Number		1,2	2			
Duplex Mode		1,2	TDD			
TDD configuration		1,2	TDDConf.3.1			
$BW_{channel}$	MHz	1,2	100: NRB,c = 66			
Data RBs allocated		1,2	48			
Initial BWP Configuration		1,2	DLBWP.0.1 ULBWP.0.1			
Dedicated BWP Configuration		1,2	DLBWP.1.1 ULBWP.1.1			
TRS Configuration		1	TRS.2.1 TDD			
PDSCH/PDCCH TCI state		1	TCI.State.2			
PDSCH Reference measurement channel		1,2	SR.3.3 TDD			
RMSI CORESET Reference Channel		1,2	CR.3.2 TDD			
Dedicated CORESET Reference Channel		1,2	CCR.3.7 TDD			
OCNG Patterns		1,2	OP.3			
SSB configuration		1,2	SSB.2 FR2			
SMTC configuration		1,2	SMTC.2			
PDSCH/PDCCH subcarrier spacing	kHz	1,2	120			
TRS Configuration		1,2	TRS.2.1 TDD			
CSI-RS configuration for CSI reporting		1,2	CSI-RS.3.1 TDD			
reportConfigType		1,2	periodic			
reportQuantity		1,2	cri-RI-PMI-CQI			
CSI reporting periodicity	slot	1,2	40			
CSI reporting offset	slot	1,2	4			
EPRE ratio of PSS to SSS	dB	1,2	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
Propagation condition		1,2	AWGN			

Table A.5.5.7.1.1-4: OTA related test parameters

Parameter	Unit	Cell 2

		T1	T2	T3	T4
Angle of arrival configuration		Setup 2a according to clause A.3.15.2.1			
Assumption for UE beams Note 6		Rough			
$\hat{E}_s/N_{oc}$ Ês Note2	dBm/SCS	-∞	-81		
SSB_RP Note2, Note 4	dBm/SCS	-∞	-81		
$\hat{E}_s/I_{ot}$ BB Note 2, Note 7	dB	-∞	4.88		
Io Note 2, Note 4	dBm/95.04 MHz	N/A	-56.41		

Note 1: Void
Note 2: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: Void
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: Void
Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 7: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.

A.5.5.7.1.2 Test Requirements

The UE shall transmit the PRACH to PSCell at latest 582 ms Note1 into T2.

The UE shall send at least one CSI report for PSCell with non-zero CQI index during T3.

The UE shall periodically send CSI reports for PSCell after the UE has sent first CQI report with non-zero CQI index during T3

The UE shall stop sending CSI reports for PSCell in at latest 20 ms into T4.

All the above test requirements shall be fulfilled for the observed PSCell addition delay and PSCell release delay to be counted as correct. The rate of correct observed PSCell addition delay and PSCell release delay during repeated tests shall be at least 90%.

Note1: The PSCell addition delay can be expressed as follows as specified in clause 7.31.2 of TS 36.133 [15]:

$$T_{config_PSCell} = T_{RRC_delay} + T_{processing} + T_{search} + T_{\Delta} + T_{PSCell_DU} + 2ms$$

Where:

T_{RRC_delay} = 20ms

$T_{processing}$ = 40ms

T_{search} = 8*3*20 = 480 ms

T_{Δ} = 20ms

T_{PSCell_DU} = 1*10+10 = 20 ms

A.5.5.8 Active TCI state switch delay

A.5.5.8.1 MAC-CE based active TCI state switch

A.5.5.8.1.1 E-UTRAN – NR PSCell FR2 active TCI state switch for a known TCI state

A.5.5.8.1.1.1 Test Purpose and Environment

The purpose of this test is to verify the active TCI state switch delay requirement defined in clause 8.10.3Supported test configurations are shown in Table A.5.5.8.1.1.1-1.

The test scenario comprises of one E-UTRA PCell (Cell 1), and one NR PSCell (Cell 2) as given in Table A.5.5.8.1.1.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell is specified in Table A.5.5.8.1.1.1-3 below. The OTA related test parameters for FR2 is shown in Table A.5.5.8.1.1.1-4.

PDCCHs indicating new transmissions shall be sent continuously on PSCell (Cell 2) to ensure that the UE would have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), and Cell 2 (PSCell) on radio channel 2 (PSCC).
- UE is configured with 2 different TCI states for PSCell, PDCCH TCI state 0 (QCL'd to SSB0) and TCIstate 1 (QCL'd to SSB1), in Cell 2 before starting the test.
- UE is indicated in TCI state 0 as the active PDCCH TCI state

The test consists of two time periods, T1 and T2. Figure A.5.5.8.1.1.1-1 and Figure A.5.5.8.1.1.1-2 show the Time multiplexed (allocation in Frequency is symbolic) downlink transmissions from each Angle of Arrival. During T1 only SSB to which PDCCH-TCI-state0 is QCL'd is transmitted. At the beginning of T2, the SSB corresponding to TCI state 1 starts transmitting. The UE is configured to provide periodic L1-RSRP reports. In slot n which is within 1280ms of UE providing L1-RSRP report with results for both SSB0 and SSB1, UE receives a MAC-CE command indicating a switch to TCI state 1. *tci-PresentInDCI* is not configured in the PDSCH configuration, i.e. TCI state for the PDSCH is identical to the PDCCH TCI state.

The test equipment verifies that UE can be scheduled on PSCell on TCI state 0 till n+ T_{HARQ} +3 ms.The test equipment also verifies the TCI state switch time in PSCell by scheduling the UE on TCI state 1 after n+ T_{HARQ} +3 ms + ($T_{first\text{-}SSB}$ + $T_{SSB\text{-}proc}$) .

Table A.5.5.8.1.1.1-1: Supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.5.5.8.1.1.1-2: General test parameters for TCI state switch

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
CP length		Normal	
DRX		OFF	For both PCell and PSCell

Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell2 timing offset to cell1	µs	3	Synchronous EN-DC
T1	s	0.2	
T2	s	0.2	

Table A.5.5.8.1.1.1-3: NR Cell specific test parameters for TCI state switch

Parameter	Unit	Cell 2
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
$BW_{channel}$		100 MHz: $N_{RB,c}$ = 66
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3. 2 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP. 5
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
TCI State 0		TCI.State.2
TCI State 1		TCI.State.3
TRS Configuration		TRS.2.1 TDD TRS.2.2 TDD
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		AWGN
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.		

Table A.5.5.8.1.1.1-4: OTA related test parameters for TCI state switch

Parameter	Unit	Cell 2			
		SSB0		SSB1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.3.15.3			
		AoA1		AoA2	
$\hat{E}_s$	dBm/SCS	-80.6	-80.6	-Infinity	-80.6
SS B_RP Note 2	dBm/ SCS	-80.6	-80.6	- Infinity	-80.6
$\hat{E}_s / I_{ot}$ BB Note 7	dB	8.3	8.3	-Infinity	8.3
Io Note2	dBm/95.04 MHz Note4	-56.0	-56.0	- Infinity	-50.0

Note 1:	Void
Note 2:	SS B_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	Void
Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5:	As observed with 0dBi gain antenna at the center of the quiet zone.
Note 6:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 7:	Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

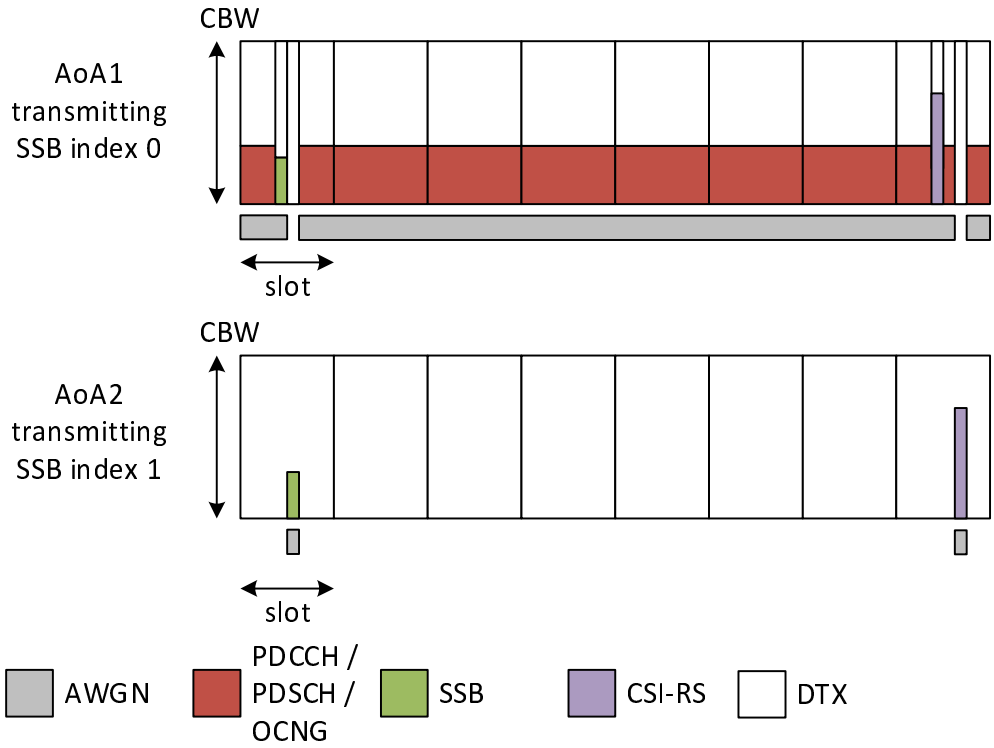

Figure A.5.5.8.1.1.1-1: Time multiplexed downlink transmissions during T1

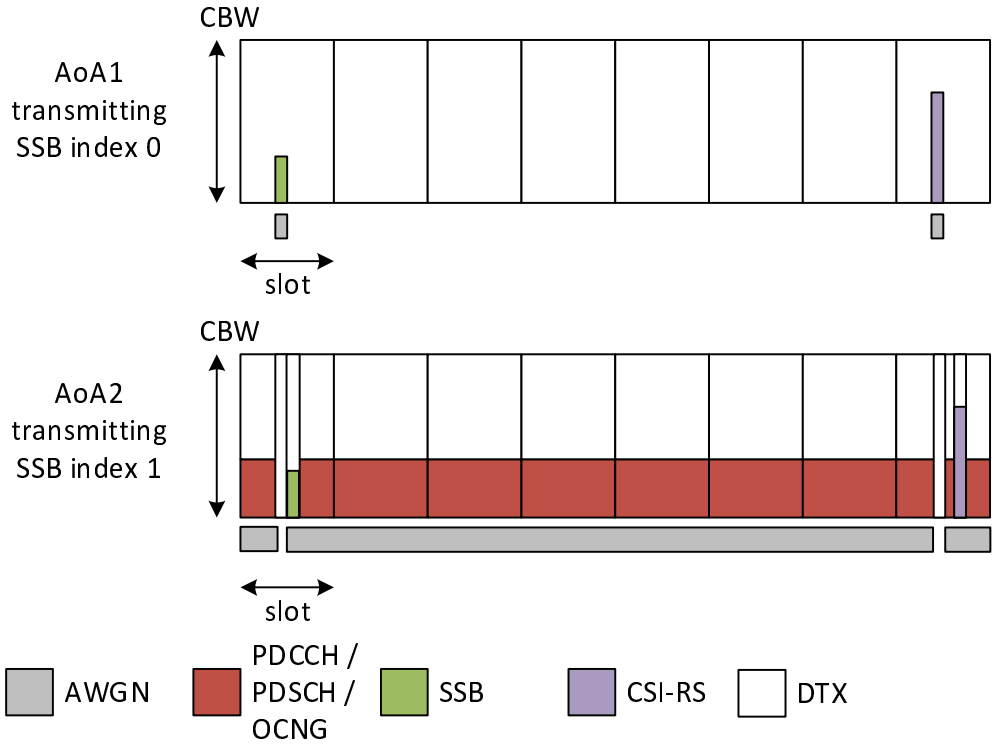

Figure A.5.5.8.1.1.1-2: Time multiplexed downlink transmissions during T2

A.5.5.8.1.1.2 Test Requirements

During T2, UE shall send L1-RSRP report with results for both SSB0 and SSB1.

After receiving MAC-CE command in slot n, UE shall:

- be able to continue to receive on TCI state 0 till n+ T_{HARQ} +3 ms
- be able to start receiving on TCI state 1 after n+ T_{HARQ} +5 ms + $T_{first-SSB}$

A.5.5.8.2 RRC based active TCI state switch

A.5.5.8.2.1 E-UTRAN – NR PSCell FR2 active TCI state switch for a known TCI state

A.5.5.8.2.1.1 Test Purpose and Environment

The purpose of this test is to verify the active TCI state switch delay requirement defined in clause 8.10.3Supported test configurations are shown in Table A.5.5.8.2.1.1-1.

The test scenario comprises of one E-UTRA PCell (Cell 1), and one NR PSCell (Cell 2) as given in Table A.5.5.8.2.1.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell is specified in Table A.5.5.8.2.1.1-3 below. The OTA related test parameters for FR2 is shown in Table A.5.5.8.2.1.1-4.

PDCCHs indicating new transmissions shall be sent continuously on PSCell (Cell 2) to ensure that the UE would have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), and Cell 2 (PSCell) on radio channel 2 (PSCC).
- UE is configured with 1 TCI state for PSCell, PDCCH-TCI-state0 (QCL'd to SSB0)
- UE is indicated in TCI state0 as the active TCI state

The test consists of two time periods, T1 and T2. Figure A.5.5.8.2.1.1-1 and Figure A.5.5.8.2.1.1-2 show the Time multiplexed (allocation in Frequency is symbolic) downlink transmissions from each Angle of Arrival. During T1 only SSB to which TCI-state0 is QCL'd is transmitted. At the beginning of T2, the SSB corresponding to TCI-state1 starts transmitting. The UE is configured to provide periodic L1-RSRP reports. In slot n which is within 1280 ms of UE providing L1-RSRP report with results for both SSB0 and SSB1, UE receives a RRC command indicating a switch to TCI-state1.

The test equipment verifies the TCI state switch time in PSCell by scheduling the UE on TCI state 1 after n+ $T_{RRC_processing}$ + $T_{first\text{-}SSB}$ + 2ms.

Table A.5.5.8.2.1.1-1: Supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.5.5.8.2.1.1-2: General test parameters for TCI state switch

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
CP length		Normal	
DRX		OFF	For both PCell and PSCell
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell2 timing offset to cell1	μs	3	Synchronous EN-DC
T1	s	0.2	
T2	s	0.2	

Table A.5.5.8.2.1.1-3: NR Cell specific test parameters for TCI state switch

Parameter	Unit	Cell 2
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
$BW_{channel}$		100 MHz: $N_{RB,c}$ = 66
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3.2 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD

OCNG Patterns		OP.5
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
TCI State 0		TC. State.2
TCI State 1		TCI.State.3
TRS Configuration		TRS.2.1 TDD TRS.2.2 TDD
reportConfigType		ssb-Index-RSRP
reportConfigType		periodic
Number of reported RS		2
L1-RSRP reporting period	slot	640
timeRestrictionForChannelMeasurements		configured
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		AWGN
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.		

Table A.5.5.8.2.1.1-4: OTA related test parameters for TCI state switch

Parameter	Unit	Cell 2			
		SSB0		SSB1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.3.15.3			
		AoA1		AoA2	
Assumption for UE beams[Note 6]		Rough		Rough	
$\hat{E}_s$	dBm/SCS	-80.6	-80.6	-Infinity	-80.6
SSB_RP [Note 2]	dBm/ SCS	-80.6	-80.6	- Infinity	-80.6
Io[Note2]	dBm/95.04 MHz [Note4]	-56.0	-56.0	- Infinity	-56.0

Note 1: Void
Note 2: SS B_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: Void
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the center of the quiet zone.
Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 7: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

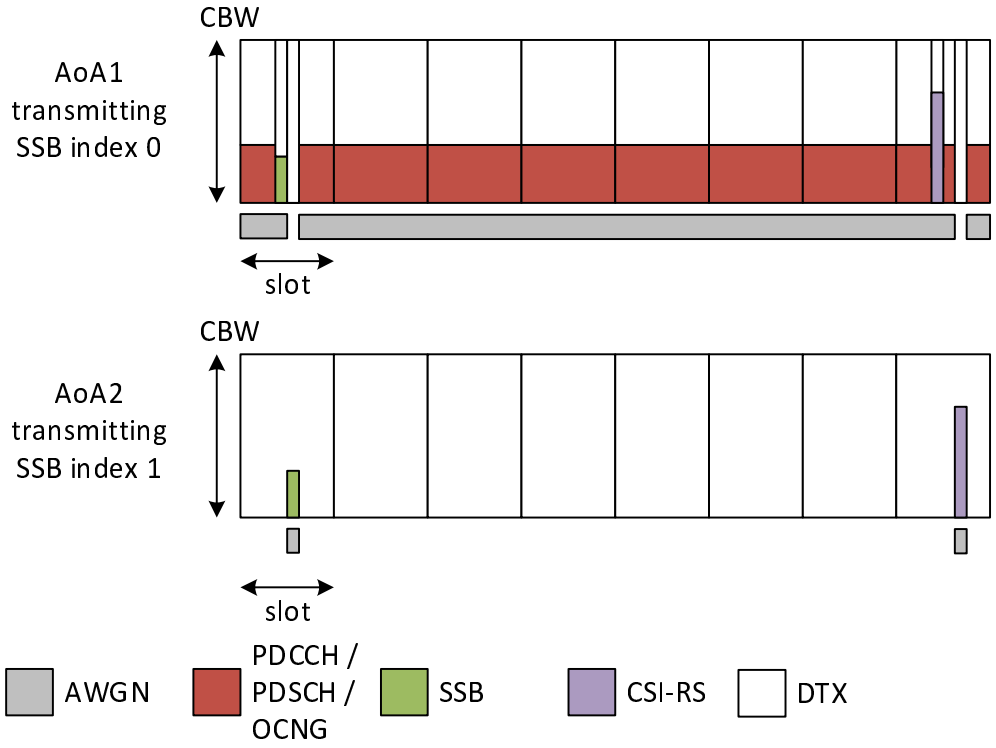

Figure A.5.5.8.2.1.1-1: Time multiplexed downlink transmissions during T1

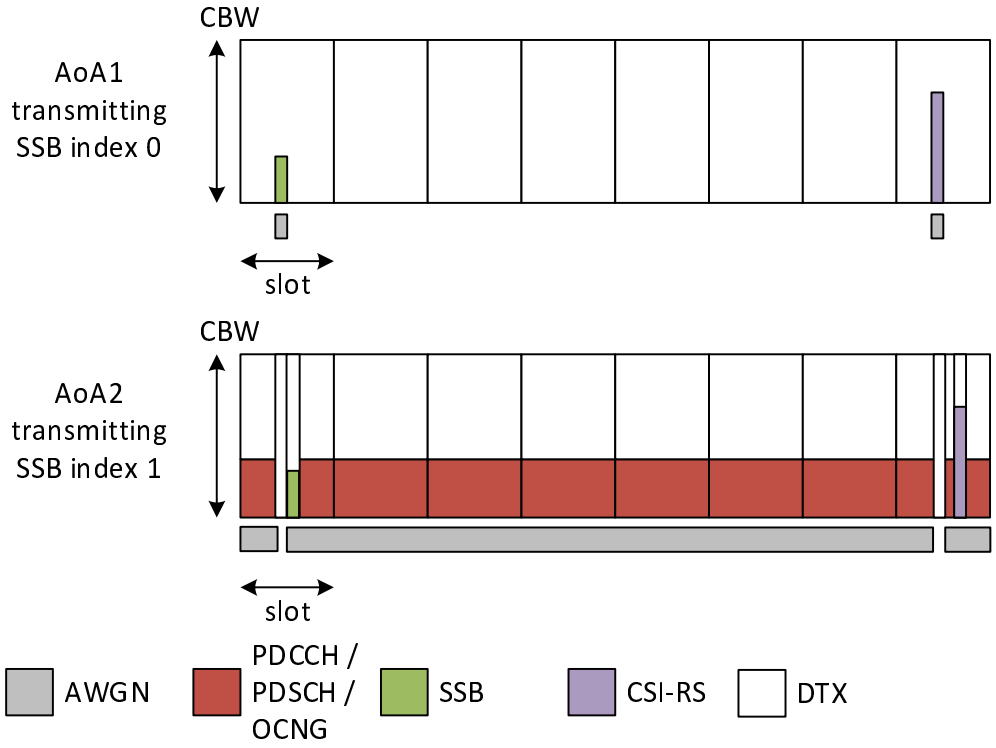

Figure A.5.5.8.2.1.1-2: Time multiplexed downlink transmissions during T2

A.5.5.8.2.1.2 Test Requirements

During T2, UE shall send L1-RSRP report with both SSB0 and SSB1.

After receiving RRC command in slot n, UE shall be able to start receiving on TCI state 1 after n+ $T_{RRC_processing}$ + $T_{first\text{-}SSB}$ + 2ms.

A.5.5.9 Uplink spatial relation switch delay

A.5.5.9.1 MAC-CE based uplink spatial relation switch

A.5.5.9.1.1 E-UTRAN – NR PSCell FR2 uplink spatial relation switch for a known spatial relation

A.5.5.9.1.1.1 Test Purpose and Environment

The purpose of this test is to verify the uplink spatial relation switch delay requirement defined in clause 8.12.3 by a UE capable of beam correspondence without the need for UL beam sweeping. Supported test configurations are shown in Table A.5.5.9.1.1.1-1.

The test scenario comprises of one E-UTRA PCell (Cell 1), and one NR PSCell (Cell 2) as given in Table A.5.5.9.1.1.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell is specified in Table A.5.5.9.1.1.1-3 below. The OTA related test parameters for FR2 is shown in Table A.5.5.9.1.1.1-4.

PDCCHs indicating new transmissions shall be sent continuously on PSCell (Cell 2) to ensure that the UE would have continuous ACK/NACK sending by PUCCH.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), and Cell 2 (PSCell) on radio channel 2 (PSCC).
- UE is configured with 2 different spatial relations for PSCell, PUCCH spatial relation 0 (QCL'd to SSB0) and spatial relation 1 (QCL'd to SSB1), in Cell 2 before starting the test.
- UE is indicated in spatial relation 0 as the active PUCCH spatial relation

The test consists of two time periods, T1 and T2. During T1 only SSB to which PUCCH spatial relation 0 QCLed is transmitted. At the beginning of T2, the SSB corresponding to spatial relation 1 starts transmitting. The UE is configured to provide periodic L1-RSRP reports. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured. In slot n which is within 1280ms of UE providing L1-RSRP report with results for both SSB0 and SSB1, UE receives a MAC-CE command indicating a switch to transmit PUCCH with spatial relation 1.

The test equipment verifies that UE can be scheduled on PSCell on spatial relation 0 till n + T_{HARQ}/NR slot length + $3N_{slot}^{subframe,\mu}$. The test equipment also verifies the spatial relation switch time in PSCell by scheduling the UE on spatial relation 1 from slot n + T_{HARQ}/NR slot length + $3N_{slot}^{subframe,\mu}$ + 1 and onwards.

Table A.5.5.9.1.1.1-1: Supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.5.5.9.1.1.1-2: General test parameters for spatial relation switch

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
CP length		Normal	
DRX		OFF	For both PCell and PSCell
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell2 timing offset to cell1	µs	3	Synchronous EN-DC
L1-RSRP reporting period	slot	160	Periodic L1-RSRP reporting configured
L1-RSRP measured RS		SSB0, SSB1	L1-RSRP measurements of SSB0 and SSB1.
Number of reported RS		2	L1-RSRP reporting of measurements on SSB0 and SSB1.
T1	s	0.2	
T2	s	2	

Table A.5.5.9.1.1.1-3: NR Cell specific test parameters for spatial relation switch

Parameter	Unit	Cell 2
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
$BW_{channel}$		100 MHz: $N_{RB,c}$ = 66

Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3.1 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP.1
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
Spatial Relation 0		PUCCH. SRI.0
Spatial Relation 1		PUCCH. SRI.1
TRS Configuration		TRS.2.1 TDD
reportConfigType		ssb-Index-RSRP
reportConfigType		periodic
timeRestrictionForChannelMeasurements		configured
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS (Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		

Table A.5.5.9.1.1.1-4: OTA related test parameters for uplink spatial relation switch

Parameter	Unit	Cell 2			
		SSB0		SSB1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.3.15.3			
		AoA1		AoA2	
Assumption for UE beams Note 6		Rough			
Noc Note 1	dBm/15 kHz	-92.1			
Noc Note 1	dBm/SCS	-83.1			
Ês/Noc	dB	1	1	-Infinity	1
SS-RSRP Note 2	dBm/120 kHz Note3	-82.1	-82.1	-Infinity	-82.1
Io Note2,Note6	dBm/95.04 MHz Note4	-50.6	-50.6	-54.1	-50.6

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the center of the quiet zone.
Note 6: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.

A.5.5.9.1.1.2 Test Requirements

During T2, UE shall send L1-RSRP report with results for SSB1.

After receiving MAC-CE command in slot n, UE shall:

- be able to continue to transmit PUCCH on spatial relation 0 till $n + T_{HARQ}$/NR slot length + $3N_{slot}^{subframe,\mu}$;
- be able to start transmitting PUCCH on spatial relation 1 from slot $n + T_{HARQ}$/NR slot length + $3N_{slot}^{subframe,\mu} + 1$.

A.5.5.9.2 RRC based spatial relation switch

A.5.5.9.2.1 E-UTRAN – NR PSCell FR2 spatial relation switch associated with a known DL-RS

A.5.5.9.2.1.1 Test Purpose and Environment

The purpose of this test is to verify the RRC based spatial relation switch delay requirement defined in clause 8.12.5 by a UE capable of beam correspondence without the need for UL beam sweeping. Supported test configurations are shown in Table A.5.5.9.2.1.1-1.

The test scenario comprises of one E-UTRA PCell (Cell 1), and one NR PSCell (Cell 2) as given in Table A.5.5.9.2.1.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell is specified in Table A.5.5.9.2.1.1-3 below. The OTA related test parameters for FR2 is shown in Table A.5.5.9.2.1.1-4.

Periodic SRS is transmitted on NR PSCell (Cell2), and the SRS configuration is SRSConf.1 given in Table A.5.4.1.1.1-3.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), and Cell 2 (PSCell) on radio channel 2 (PSCC).
- UE is configured with 1 SRS-SpatialRelation0 associated with SSB0.
- UE is indicated SRS-SpatialRelation0 as the active SRS spatial relation.

The test consists of two time periods, T1 and T2. During T1 only SSB0 to which SRS-SpatialRelation0 associated is transmitted. UE shall transmit periodic SRS with SRS-SpatialRelation0 of PSCell. At the beginning of T2, the SSB1 corresponding to SRS-SpatialRelation1 starts transmitting. The UE is configured to provide periodic L1-RSRP reports. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured. In slot n which is within 1280 ms of UE providing L1-RSRP report with results for both SSB0 and SSB1, UE receives a RRC command indicating a switch to transmit periodic SRS with target SRS-SpatialRelation1. The test equipment verifies that UE

shall be able to transmit periodic SRS with target spatial relation (SRS-SpatialRelation1) on PSCell in the slot n + $T_{RRC_processing}$/NR slot length + 1.

Table A.5.5.9.2.1.1-1: Supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.	

Table A.5.5.9.2.1.1-2: General test parameters for spatial relation switch associated with a known DL-RS

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
CP length		Normal	
DRX		OFF	For both PCell and PSCell
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
T1	s	0.2	
T2	s	2	

Table A.5.5.9.2.1.1-3: NR Cell specific test parameters for spatial relation switch associated with a known DL-RS

Parameter	Unit	Cell 2
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
$BW_{channel}$		100 MHz: $N_{RB,c}$ = 66
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3.1 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP.1
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
SRS-SpatialRelation0		SRS.SRI0
SRS-SpatialRelation1		SRS.SRI1
TRS Configuration		TRS.2.1 TDD
reportConfigType		ssb-Index-RSRP
reportConfigType		periodic
Number of reported RS		2
L1-RSRP reporting period	slot	160
timeRestrictionForChannelMeasurements		configured

Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS (Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		

Table A.5.5.9.2.1.1-4: OTA related test parameters for spatial relation switch associated with a known DL-RS

Parameter	Unit	Cell 2			
		SSB0		SSB1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.3.15.3			
		AoA1		AoA2	
Assumption for UE beams Note 6		Rough		Rough	
N_{oc} Note 1	dBm/15 kHz	-92.1			
N_{oc} Note 1	dBm/SCS	-83.1			
$\hat{E}_s/N_{oc}$	dB	1	1	-Infinity	1
SS-RSRP Note 2	dBm/120 kHz Note3	-82.1	-82.1	-Infinity	-82.1
Io Note2,Note6	dBm/95.04 MHz Note4	-50.6	-50.6	-54.1	-50.6
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone					
Note 5: As observed with 0dBi gain antenna at the center of the quiet zone.					
Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation					

A.5.5.9.2.1.2 Test Requirements

During T2, UE shall send L1-RSRP report with SSB1 to which SRS-SpatialRelation1 is associated.

After receiving RRC command in slot n, UE shall be able to transmit target periodic SRS with SRS-SpatialRelation1 on PSCell in the slot $n + T_{RRC_processing}/NR\ slot\ length + 1$.

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.10 UE specific CBW change

A.5.5.10.1 UE specific CBW change on FR2 NR PSCell

A.5.5.10.1.1 Test Purpose and Environment

The purpose of this test is to verify the UE specific CBW change delay requirement defined in clause 8.13. Supported test configurations are shown in Table A.5.5.10.1.1-1.

The test scenario comprises of one E-UTRA PCell (Cell 1) and one NR PSCell (Cell 2) as given in Table A.5.5.10.1.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell are specified in Table A.5.5.10.1.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC) and to Cell 2 (PSCell) on radio channel 2 (PSCC).
- UE has bandwidth part BWP-1 in its RRC-configuration for Cell 2 (PSCell).
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 of initial condition in PSCell.
- UE is indicated in *SCS-SpecificCarrier* that the active CBW is CBW-1 of initial condition in PSCell.

All cells have constant signal levels throughout the test.

The test consists of 1 time period, with duration of T1.

During T1,

Time period T1 starts when a *RRCReconfiguration* which reconfigure the UE specific CBW parameter, sent from the test equipment to the UE, is received at the UE side in PSCell's slot # denoted *i*. The UE shall reconfigure its UE specific CBW with the updated UE specific CBW of final condition.

The UE shall be able to completely receive PDSCH at the beginning of the DL slot right after PSCell's DL slot ($i+\frac{T_{RRCprocessingDelay}+T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$) as defined in clause 8.13 and be ready for the reception of uplink grant for the PSCell no later than at the beginning of the DL slot right after slot ($i+\frac{T_{RRCprocessingDelay}+T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$). The UE shall be continuously scheduled on PSCell's BWP-1 starting from the beginning of the DL slot right after slot ($i+\frac{T_{RRCprocessingDelay}+T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$).

$T_{RRCprocessingDelay}$ and $T_{CBWchangeDelayRRC}$ are defined in clause 8.13.

The test equipment verifies the UE specific CBW change switch time in PSCell by counting the time from the time when the RRC Reconfiguration message including updated UE specific CBW configuration is sent till the time when RRC Reconfiguration Complete message is received.

Table A.5.5.10.1.1-1: UE specific CBW change supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.5.5.10.1.1-2: General test parameters for UE specific CBW change in synchronous EN-DC

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
CP length		Normal	
DRX		OFF	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell2 timing offset to cell1	µs	3	Synchronous EN-DC
T1	s	[0.2]	

Table A.5.5.10.1.1-3: NR Cell specific test parameters for UE specific CBW change in synchronous EN-DC

Parameter		Unit	Cell 2
Frequency Range			FR2
Duplex mode			TDD
TDD configuration			TDDConf.3.1
$BW_{channel}$			100 MHz: $N_{RB,c}$ = 66
Active BWP ID			1
Initial DL BWP Configuration			DLBWP.0.2
Initial UL BWP Configuration			ULBWP.0.2
Active DL BWP Configuration			DLBWP.1.3
Active UL BWP Configuration			DLBWP.1.3
Initial Condition	Active DL CBW-1 Configuration		DLCBW.1.1
	Active UL CBW-1 Configuration		ULCBW.1.1
Final Condition	Active DL CBW-1 Configuration		DLCBW.1.2
	Active UL CBW-1 Configuration		ULCBW.1.2
PDSCH Reference measurement channel			SR.3.1 TDD
RMSI CORESET parameters			CR.3.1 TDD
Dedicated CORESET parameters			CCR.3.1 TDD
OCNG Patterns			OP.1
SSB Configuration			SSB.1 FR2
SMTC Configuration			SMTC.1
TCI State			TCI.State.0
TRS Configuration			TRS.2.1 TDD
Antenna Configuration			1x2
Propagation Condition			AWGN
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			

EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].

Table A.5.5.10.1.1-4: OTA related test parameters for UE specific CBW change test case

Parameter		Unit	Cell 2
Angle of arrival configuration			Setup 1 according to table A.3.15
Assumption for UE beams Note 5			Fine
N_{oc} Note1	NR_TDD_FR2_A	dBm/15kHz	-112
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
N_{oc} Note1	NR_TDD_FR2_A	dBm/SCS	-103
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
SS-RSRP Note2	NR_TDD_FR2_A	dBm/SCS Note3	-85
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
$\hat{E}_s / I_{ot}$		dB	18
Io Note2	NR_TDD_FR2_A	dBm/95.04 MHz Note4	-56
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.5.5.10.1.2 Test Requirements

During T1, the UE shall be ready for the reception of uplink grant for PSCell in the beginning of the DL slot right after slot ($i+\frac{T_{RRC processing Delay}+T_{CBW change Delay RRC}}{NR\ Slot\ length}$).

All of the above test requirements shall be fulfilled in order for the observed PSCell UE specific CBW change switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

[The rate of correct events observed during repeated tests shall be at least 90%].

A.5.5.11 Unified TCI state switch delay

A.5.5.11.1 MAC-CE based active joint TCI state switch

A.5.5.11.1.1 E-UTRAN – NR PSCell FR2 active joint TCI state switch for a known TCI state

A.5.5.11.1.1.1 Test Purpose and Environment

The purpose of this test is to verify the MAC-CE based joint TCI state switch delay requirement defined in clause 8.15.3 and 8.16.3 by a UE capable of beam correspondence without the need for UL beam sweeping. Supported test configuration is shown in Table A.5.5.11.1.1.1-1.

The test scenario comprises of one E-UTRA PCell (Cell 1), and one NR PSCell (Cell 2) as given in Table A.5.5.11.1.1.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.2-1 and cell-specific parameters of NR PSCell is specified in Table A.5.5.11.1.1.2-1 below. The OTA related test parameters for FR2 are shown in Table A.5.5.11.1.1.2-2.

PDCCHs indicating new transmissions shall be sent continuously on PCell to ensure that the UE would have ACK/NACK sending.

Table A.5.5.11.1.1.1-1: Supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.5.5.11.1.1.1-2: General test parameters for TCI state switch

Parameter	Unit	Value	Comment
E-UTRA RF Channel No.		Channel 1	One E-UTRA radio channel is used for this test
NR RF Channel No.		Channel 2	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
CP length		Normal	
DRX		OFF	For both PCell and PSCell
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell2 timing offset to cell1	μs	3	Synchronous EN-DC

L1-RSRP reporting period		160	Periodic L1-RSRP reporting configured
L1-RSRP measured RS		SSB0, SSB1	L1-RSRP measurements of SSB0 and SSB1.
Number of RS for L1-RSRP reporting		2	L1-RSRP reporting of measurements on SSB0 and SSB1.
T1	s	0.2	
T2	s	2	

A.5.5.11.1.1.2 Test parameters

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), and Cell 2 (PSCell) on radio channel 2 (PSCC).
- UE is provided with *dl-OrJoint-TCIStateList-r17* and UE's higher layer signalling *unifiedTCI-StateType-r17* in IE *MIMOParam-r17* is set to *joint.*
- UE is configured with 2 different DLorJoint States for PSCell, Joint TCI state 0 (QCL'd to SSB0) and Joint TCI state 1 (QCL'd to SSB1) before starting the test,
- UE is indicated in Joint TCI state 0 as the active joint TCI state.

The test consists of two time periods, T1 and T2. Figure A.7.5.x.y.1.1-1 and Figure A.7.5.x.y.1.1-2 show the Time multiplexed (allocation in Frequency is symbolic) downlink transmissions from each Angle of Arrival. During T1 only SSB0 to which Joint TCI state 0 is QCL'd is transmitted. At the beginning of T2, the SSB1 corresponding to Joint TCI state 1 starts transmitting. The UE is configured to provide periodic L1-RSRP reports. In slot n which is within 1280ms of UE providing L1-RSRP report with results for both SSB0 and SSB1, UE receives a MAC-CE command indicating a switch to Joint TCI state 1.The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

The test equipment verifies that UE shall be able to receive and transmit with Joint TCI state 0 until slot n+ T_{HARQ} +3$N_{slot}^{subframe,\mu}$, and shall be able to receive and transmit with Joint TCI state 1 from slot n+ T_{HARQ} +3$N_{slot}^{subframe,\mu}$ + ($T_{first_target\text{-}PL\text{-}RS}$ + 4*$T_{target_PL\text{-}RS}$ + 2ms) / *NR slot length*.

Table A.5.5.11.1.1.2-1: NR Cell specific test parameters for TCI state switch

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
$BW_{channel}$		100 MHz: $N_{RB,c}$ = 66
Data RBs allocated		66
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3. 2 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP. 5
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
Joint TCI State 0		DLorJoint TCI.State.2
Joint TCI State 1		DLorJoint TCI.State.3

TRS Configuration		TRS.2.1 TDD for DLorJoint TCI.State.2 TRS 2.2 TDD for DLorJoint TCI.State.3
Pathloss RS Configuration		Resource #4 in TRS.2.1 TDD for DLorJoint TCI.State.2 and for DLorJoint TCI.State.3
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		AWGN
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.		

Table A.5.5.11.1.1.2-2: OTA related test parameters for TCI state switch

Parameter	Unit	Cell 2			
		SSB#0		SSB#1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.3.15.3			
		AoA1		AoA2	
Assumption for UE beams Note 6		Rough for SSB reception			
Noc Note 1	dBm/15 kHz	-92.1			
Noc Note 1	dBm/SCS	-83.1			
Ês/Noc	dB	1	1	-Infinity	1
SS-RSRP Note 2	dBm/120 kHz Note3	-82.1	-82.1	-Infinity	-82.1
Io Note2,Note6	dBm/95.04 MHz Note4	-50.6	-50.6	-54.1	-50.6
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone Note 5: As observed with 0dBi gain antenna at the center of the quiet zone. Note 6: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.					

A.5.5.11.1.1.3 Test Requirements

The test verifies that UE can be scheduled by PSCell on Joint TCI state 0 and Joint TCI state 1.

During T2, UE shall send L1-RSRP report with results for both SSB0 and SSB1.

After receiving MAC-CE command in slot n, UE shall:

- be able to receive and transmit with Joint TCI state 0 until slot n+ T_{HARQ} + $3N_{slot}^{subframe,\mu}$
- be able to start receiving and transmitting with Joint TCI state 1 after slot n+ T_{HARQ} +$3N_{slot}^{subframe,\mu}$ + ($T_{first_target\text{-}PL\text{-}RS}$ + 4*$T_{target_PL\text{-}RS}$ + 2ms) / *NR slot length*

The rate of correct events observed during repeated tests shall be at least 90%

A.5.5.11.2 MAC-CE based active uplink TCI state switch

A.5.5.11.2.1 E-UTRAN – NR PSCell FR2 active uplink TCI state switch for a known TCI state

A.5.5.11.2.1.1 Test Purpose and Environment

The purpose of this test is to verify the MAC-CE based uplink TCI state switch delay requirement defined in clause 8.16.3 by a UE capable of beam correspondence without the need for UL beam sweeping. Supported test configurations are shown in Table A.5.5.11.2.1.1-1.

The test scenario comprises of one E-UTRA PCell (Cell 1), and one NR PSCell (Cell 2) as given in Table A.5.5.11.2.1.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.2-1 and cell-specific parameters of NR PSCell is specified in Table A.5.5.11.2.1.2-1 below. The OTA related test parameters for FR2 is shown in Table A.5.5.11.2.1.2-2.

Table A.5.5.11.2.1.1-1: Supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.5.5.11.2.1.1-2: General test parameters for spatial relation switch

Parameter	Unit	Value	Comment
E-UTRA RF Channel No.		Channel 1	One E-UTRA radio channel is used for this test
NR RF Channel No.		Channel 2	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
CP length		Normal	
DRX		OFF	For both PCell and PSCell
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell2 timing offset to cell1	µs	3	Synchronous EN-DC
L1-RSRP reporting period	slot	160	Periodic L1-RSRP reporting configured
L1-RSRP measured RS		SSB0, SSB1	L1-RSRP measurements of SSB0 and SSB1.
Number of reported RS		2	L1-RSRP reporting of measurements on SSB0 and SSB1.
T1	s	0.2	
T2	s	2	

A.5.5.11.2.1.2 Test parameters

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), and Cell 2 (PSCell) on radio channel 2 (PSCC);

- PDCCHs indicating new transmissions shall be sent continuously on PSCell (Cell 2) to ensure that the UE would have continuous ACK/NACK sending by PUCCH;

- UE is provided with *TCI-UL-State-r17* and UE's higher layer signalling *unifiedTCI-StateType-r17* in IE *MIMOParam-r17* is set to *separate*;

- UE is configured with 2 different uplink TCI states for PSCell, PUCCH uplink TCI state 0 (associated with SSB0) and uplink TCI state 1 (associated with SSB1), by using RRC signalling *ul-TCI-StateList-r17* in IE *BWP-UplinkDedicated*, in Cell 2 before starting the test;

- UE is indicated uplink TCI state 0 as the active PUCCH uplink TCI state.

The test consists of two time periods, T1 and T2. During T1 only SSB#0 with which PUCCH uplink TCI state 0 is associated is transmitted. At the beginning of T2, the SSB#1 corresponding to uplink TCI state 1 starts transmitting. After the beginning of T2, in slot *n* which is within 1280ms of UE providing L1-RSRP report with results for both SSB#0 and SSB#1, UE receives a MAC-CE command indicating a switch to transmit PUCCH with uplink TCI state 1. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

Index of CSI-RS#1 is configured for UE as *PUSCH-PathlossReferenceRS-Id-r17* which is indicated in *TCI-UL-State-r17* of uplink TCI state 1. CSI-RS#1 is QCLed typeD with SSB#1. UE does not maintain CSI-RS#1 as pathloss RS before the uplink TCI state switching.

Table A.5.5.11.2.1.2-1: NR Cell specific test parameters for uplink TCI state switch

Parameter	Unit	Cell 2
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
$BW_{channel}$		100 MHz: $N_{RB,c}$ = 66
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3.1 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP.1
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
DL TCI State		DLorJoint TCI.State.0
PL-RS Configuration (CSI-RS#1)		Resource #4 in TRS.2.1 TDD for UL TCI.State.2 Resource #4 in TRS.2.2 TDD for UL TCI.State.3
Uplink TCI State 0		UL TCI.State.2
Uplink TCI State 1		UL TCI.State.3
TRS Configuration		TRS.2.1 TDD
reportQuantity for SSB		ssb-Index-RSRP-Index-r17
reportConfigType for SSB		periodic
reportQuantity for CSI-RS		cri-RSRP-Index-r17
reportConfigType for CSI-RS		periodic
timeRestrictionForChannelMeasurements		configured
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		

EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS (Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		

Table A.5.5.11.2.1.2-2: OTA related test parameters for uplink spatial relation switch

Parameter	Unit	Cell 2			
		SSB#0		SSB#1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.3.15.3			
		AoA1		AoA2	
Assumption for UE beams Note 6		Rough for SSB reception			
Noc Note 1	dBm/15 kHz	-92.1			
Noc Note 1	dBm/SCS	-83.1			
Ês/Noc	dB	1	1	-Infinity	1
SS-RSRP Note 2	dBm/120 kHz Note3	-82.1	-82.1	-Infinity	-82.1
Io Note2,Note6	dBm/95.04 MHz Note4	-50.6	-50.6	-54.1	-50.6
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone Note 5: As observed with 0dBi gain antenna at the center of the quiet zone. Note 6: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.					

A.5.5.11.2.1.3 Test Requirements

The test verifies that UE can be scheduled by PSCell on uplink TCI state 0 and uplink TCI state 1. The test also verifies the active uplink TCI state switch time in PSCell meeting the requirement defined in 8.16.3. Specifically,

During T2, UE shall send L1-RSRP report with results for SSB#1 before sending MAC-CE command.

After receiving MAC-CE command in slot *n* in T2, UE shall:

- be able to continue to transmit PUCCH on uplink TCI state 0 till slot $n + T_{HARQ} + 3N_{slot}^{subframe,\mu}$;
- be able to start transmitting PUCCH on uplink TCI state 1 from slot $n + T_{HARQ} + 3N_{slot}^{subframe,\mu} + (T_{first_target\text{-}PL\text{-}RS} + 4*T_{target_PL\text{-}RS} + 2ms)$ / *NR slot length* and onwards.

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.11.3 MAC-CE based active downlink TCI state switch

A.5.5.11.3.1 E-UTRAN – NR PSCell FR2 downlink TCI state switch to cell with additional PCI for a known TCI state

A.5.5.11.3.1.1 Test Purpose and Environment

The purpose of this test is to verify the active DL TCI state switch delay requirement for unified TCI defined in clause 8.15.3. Supported test configurations are shown in Table A.5.5.X.3.1.1-1.

Table A.5.5.11.3.1.1-1: Supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

A.5.5.11.3.1.2 Test Parameters

The test scenario comprises of one E-UTRA PCell (Cell 1), one NR PSCell (Cell 2), and one NR cell with additional PCI different from from serving cell (Cell 3) configured for intercell L1-RSRP measurement and report as given in Table A.5.5.11.3.1.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell and cell with additional PCI are specified in Table A.5.5.11.3.1.1-3 below. The OTA related test parameters for FR2 is shown in Table A.5.5.11.3.1.1-4.

PDCCHs indicating new transmissions shall be sent continuously on PSCell (Cell 2) and cell with additional PCI (Cell 3) to ensure that the UE would have ACK/NACK transmission.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), and Cell 2 (PSCell) on radio channel 2 (PSCC), Cell 3 (Cell with additional PCI) in radio channel 3.
- UE is provided with *dl-OrJoint-TCIStateList-r17* and UE's higher layer signalling *unifiedTCI-StateType-r17* in IE *MIMOParam-r17* is set to *seperate*;
- UE is configured with L1-RSRP measurements on cell with additional PCI (Cell 3)
- UE is configured with 2 different TCI states for PSCell, PDCCH TCI state 0 (QCL'd to TRS resource set 1, TCI state of which is QCLed to SSB0 of Cell2) and TCI state 1 (QCL'd to TRS resource set 3, TCI state of which is QCLed to SSB1 of Cell3), in Cell 2 before starting the test.
- UE is indicated in TCI state 0 as the active PDCCH TCI state

The test consists of two time periods, T1 and T2. Figure A.5.5.11.3.1.1-1 and Figure A.5.5.11.3.1.1-2 show the Time multiplexed (allocation in Frequency is symbolic) downlink transmissions from each Angle of Arrival. During T1 only SSB to which PDCCH-TCI-state0 is QCL'd is transmitted. At the beginning of T2, the SSB corresponding to TCI state 1 starts transmitting. The UE is configured to provide periodic L1-RSRP reports. In slot n which is within 1280ms of UE providing L1-RSRP report with results for both SSB0 of cell 2 and SSB1 of cell 1, UE receives a MAC-CE command indicating a switch to TCI state 1. *tci-PresentInDCI* is not configured in the PDSCH configuration, i.e. TCI state for the PDSCH is identical to the PDCCH TCI state.

The test equipment verifies that UE can be scheduled on PSCell on TCI state 0 till n+ T_{HARQ} +3 ms. The test equipment also verifies the TCI state switch time in to cell with additional PCI by scheduling the UE on TCI state 1 after n+ T_{HARQ} +3 ms + ($T_{first\text{-}SSB}$ + $T_{SSB\text{-}proc}$) .

Table A.5.5.11.3.1.1-2: General test parameters for TCI state switch

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
Cell with addiitonal PCI		Cell 3	Cell on RF channel number 3.
CP length		Normal	
DRX		OFF	For both PCell and PSCell
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell2 timing offset to cell1	μs	3	Synchronous EN-DC
T1	s	0.2	
T2	s	2	

Table A.5.5.11.3.1.1-3: NR Cell specific test parameters for TCI state switch

Parameter	Unit	Cell 2
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
$BW_{channel}$		100 MHz: $N_{RB,c}$ = 66
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3. 2 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP. 5
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
DL TCI State 0		DLorJoint TCI.State.0
DL TCI State 1		DLorJoint TCI.State.1
UL TCI State 0		UL TCI.State.0
UL TCI State 1		UL TCI.State.1
Pathloss RS Configuration		Resource #4 in TRS.2.1 TDD
TRS Configuration		TRS.2.1 TDD for DLorJoint TCI.State.0 TRS.2.2 TDD for DLorJoint TCI.State.1
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		AWGN

Note 1:	OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.

Table A.5.5.11.3.1.1-4: OTA related test parameters for TCI state switch

Parameter	Unit	Cell 2		Cell 3	
		SSB0		SSB1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.3.15.3			
		AoA1		AoA2	
$\hat{E}_s$	dBm/SCS	-80.6	-80.6	-Infinity	-80.6
SS B_RP Note 2	dBm/ SCS	-80.6	-80.6	- Infinity	-80.6
$\hat{E}_s / I_{oc}$ BB Note 7	dB	8.3	8.3	-Infinity	8.3
Io Note2	dBm/95.04 MHz Note4	-56.0	-56.0	- Infinity	-50.0

Note 1: Void
Note 2: SS B_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: Void
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the center of the quiet zone.
Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 7: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

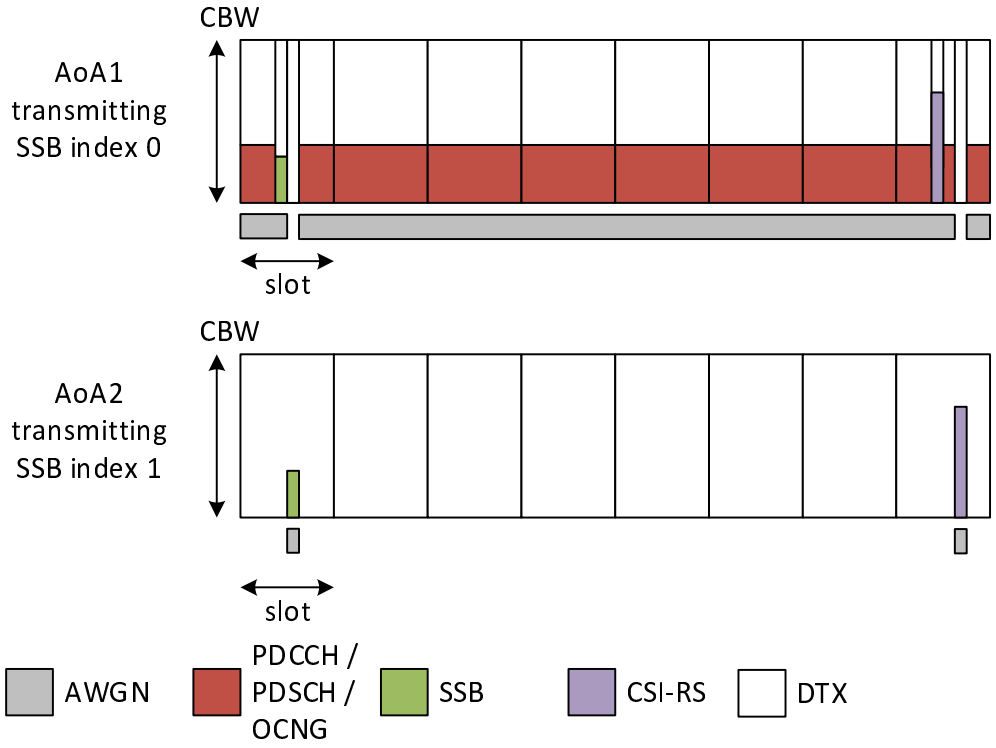

Figure A.5.5.11.3.1.1-1: Time multiplexed downlink transmissions during T1

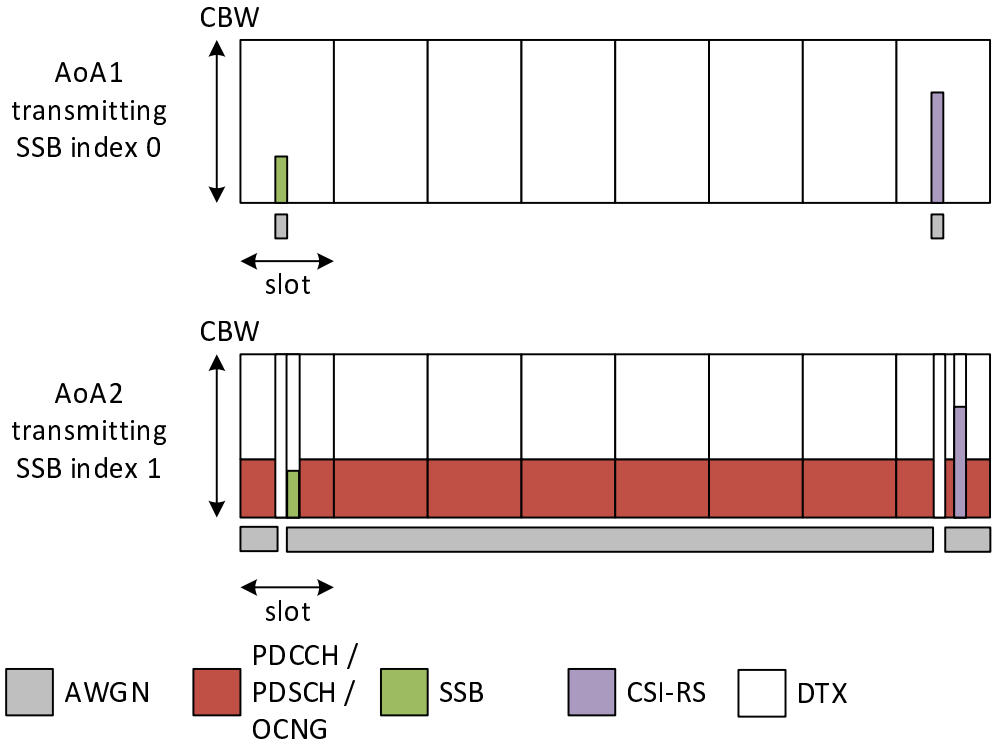

Figure A.5.5.11.3.1.1-2: Time multiplexed downlink transmissions during T2

A.5.5.11.3.1.3 Test Requirements

During T2, UE shall send L1-RSRP report with results for both SSB0 and SSB1.

After receiving MAC-CE command in slot n, UE shall:

- be able to continue to receive on DL TCI state 0 till n+ T_{HARQ} +3$N_{slot}^{subframe,\mu}$
- be able to start receiving on DL TCI state 1 after n+ T_{HARQ} +(5 ms + $T_{first\text{-}SSB}$) / *NR slot length*

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.12 PSCell activation and deactivation delay

A.5.5.12.1 PSCell activation and deactivation delay

A.5.5.12.1.1 Test purpose and environment

The purpose of this test is to verify that the NR PSCell activation and deactivation delay under EN-DC are within the requirements stated in clause 7.38 in TS 36.133 [15] for the case when UE configured with one deactivated SCG and when PScell in one SCG is being activated where the PSCell is known by the UE at the time of activation.

Supported test configurations are shown in A.5.5.12.1.1-1. The test parameters for the E-UTRA cell are given in Table A.3.7.2.2-1. The E-UTRA cell once set up is not changed across time.

The test parameters for NR cell are given in Tables A.5.5.12.1.1-2, cell-specific parameters in A.5.5.12.1.1-3 and OTA parameters in A.5.5.12.1.1-4 below. The test consists of four successive time periods with duration of T1, T2, T3 and T4. There are two carriers each with one cell. The UE is connected to Cell 1 (E-UTRA PCell) on radio channel 1 (PCC) and PSCell (Cell2) is in deactivated state. During T1, both Cell1 and Cell2 are known to UE and UE performs measurement on deactivated PCell. Before the test starts the UE is configured RLM and BFD on deactivated PSCell. During T1, UE performs RLM and BFD on the deactivated PSCell and TCI state is known.

The test system shall send a RRC message to the UE to activate PSCell (Cell 2) on radio channel 2, where no any PSCell parameter is modified in the RRC message. The RRC message (to activate PSCell) also includes a request for the UE to transmit scheduling request on PUCCH for the PSCell after the PSCell has been successfully activated. The RRC message to activate PSCell shall be sent to the UE during period T1. The point in time at which the RRC message to activate PSCell (Cell2) is received at the UE antenna connector defines the start of period T2.

The test system shall observe the periodic reporting of CSI for PSCell during T3. The point in time at which the UE has sent scheduling request on PUCCH for PSCell (Cell 2) defines the start of period T3.

The test system shall send a RRC message to the UE to deactivate PSCell (Cell 2) on radio channel 2. The RRC message to deactivate PSCell (Cell2) shall be sent to the UE during period T3, after the UE has sent at least one CQI report with non-zero CQI index for PSCell (Cell 2). The point in time at which the RRC message to deativate PSCell (Cell2) is received at the UE antenna connector defines the start of period T4.

Table A.5.5.12.1.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
1	LTE FDD, NR TDD, SSB SCS 240 kHz, data SCS 120 kHz, BW 100 MHz
2	LTE TDD, NR TDD, SSB SCS 240 kHz, data SCS 120 kHz, BW 100 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.5.5.12.1.1-2: General Test Parameters for PSCell activation and deactivation

Parameter		Unit	Value	Comment
RF Channel Number			1, 2	Two radio channels are used for this test. One for E-UTRA cell and second for NR Cell
Initial Condition	Active PCell		Cell1	PCell on RF channel number 1.
	Deactivated cell		Cell2	SCell on RF channel number 2.
Final Condition	Active PCell		Cell1	PCell on RF channel number 1.
	Deactivated cell		Cell2	PSCell deactivated on RF channel number 2.
DRX			OFF	Continuous monitoring of primary cell
Scheduling request resource priodicity			20ms	At the starting of period T3, UE sends a SR on PUCCH for PSCell
T1		s	1	During this time the PCell shall be known and cell2 shall be unknown.
T2		s	1	During this time the UE adds the PSCell.
T3		s	1	During this time the UE sends CSI reports for PSCell.
T4		s	1	During this time the UE releases the PSCell.

Table A.5.5.12.1.1-3: Cell Specific Parameters for PSCell activation and deactivation

Parameter	Unit	Config	Test			
			T1	T2	T3	T4
E-UTRA Channel Number		1,2	1			
NR Channel Number		1,2	2			
Duplex Mode		1,2	TDD			
TDD configuration		1,2	TDDConf.3.1			
$BW_{channel}$	MHz	1,2	100: NRB,c = 66			
Data RBs allocated		1,2	48			

Initial BWP Configuration		1,2	DLBWP.0.1 ULBWP.0.1
Dedicated BWP Configuration		1,2	DLBWP.1.1 ULBWP.1.1
TRS Configuration		1	TRS.2.1 TDD
PDSCH/PDCCH TCI state		1	TCI.State.2
PDSCH Reference measurement channel		1,2	SR.3.3 TDD
RMSI CORESET Reference Channel		1,2	CR.3.2 TDD
Dedicated CORESET Reference Channel		1,2	CCR.3.7 TDD
OCNG Patterns		1,2	OP.3
SSB configuration		1,2	SSB.2 FR2
SMTC configuration		1,2	SMTC.2
PDSCH/PDCCH subcarrier spacing	kHz	1,2	120
TRS Configuration		1,2	TRS.2.1 TDD
CSI-RS configuration for CSI reporting		1,2	CSI-RS.3.1 TDD
reportConfigType		1,2	periodic
reportQuantity		1,2	cri-RI-PMI-CQI
CSI reporting periodicity	slot	1,2	40
CSI reporting offset	slot	1,2	4
EPRE ratio of PSS to SSS	dB	1,2	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
Propagation condition		1,2	AWGN

Table A.5.5.12.1.1-4: OTA related test parameters

Parameter	Unit	Cell 2			
		T1	T2	T3	T4
Angle of arrival configuration		Setup 2a according to clause A.3.15.2.1			
Assumption for UE beams[Note 6]		Rough			
$\hat{E}_s / N_{oc}$ ÊS [Note2]	dBm/SCS	-81			
SSB_RP[Note2, Note 4]	dBm/SCS	-81			
$\hat{E}_s / I_{ot}$ BB [Note 2, Note 7]	dB	4.88			
Io[Note 2, Note 4]	dBm/95.04 MHz	-56.41			

Note 1:	Void
Note 2:	Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	Void
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5:	Void
Note 6:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 7:	Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.

A.5.5.12.1.2 Test Requirements

The UE performs RACH-less based PSCell activation. UE shall transmit the SR on PUCCH for PSCell at latest 65 ms[Note1] into T2.

The UE shall send at least one PUSCH on PSCell during T3.

The UE shall stop transmit PUSCH for PSCell in at latest 20 ms into T4.

All the above test requirements shall be fulfilled for the observed PSCell activation delay and PSCell deactivation delay to be counted as correct. The rate of correct observed PSCell addition delay and PSCell release delay during repeated tests shall be at least 90%.

Note1: The PSCell addition delay can be expressed as follows as specified in clause 7.38 in TS 36.133 [15]:

$T_{activation_time} = T_{RRC_delay} + T_{processing} + T_{search} + T_{\Delta} + T_{IU} + 2$ ms

Where:

$T_{RRC_delay} = 20$ms

$T_{processing} = 5$ms

$T_{search} = 0$ ms

$T_{\Delta} = 20$ms

$T_{IU} =$ max 20 ms

A.5.5.13 Conditional PSCell addition and release delay

A.5.5.13.1 Addition and Release Delay of NR PSCell

A.5.5.13.1.1 Test purpose and environment

The purpose of this test is to verify that the conditional NR PSCell addition and release delays under EN-DC are within the requirements stated in clause 8.9A.2.

Supported test configurations are shown in A.5.5.13.1.1-1. The test parameters for the E-UTRA cell are given in Table A.3.7.2.2-1. The E-UTRA cell once set up is not changed across time.

The test parameters for NR cell are given in Tables A.5.5.13.1.1-2, cell-specific parameters in A.5.5.13.1.1-3 and OTA parameters in A.5.5.13.1.1-4 below. The test consists of four successive time periods with duration of T1, T2, T3 and T4. There are two carriers each with one cell. Before the test starts the UE is connected to Cell 1 (E-UTRA

PCell) on radio channel 1 (PCC) but is not aware of Cell 2 (NR PSCell) on radio channel 2. The UE is only monitoring the PCC.

During T1 only Cell 1 is known to the UE. NR shall configure a condition implying PSCell addition (Cell 2) during T1, at a time earlier than T_{RRC_delay} before the beginning of T2.

Starting T2, Cell 2 becomes detectable. The point in time at which the UE has sent PRACH to the PSCell (Cell 2) defines the start of period T3. The test system shall observe the periodic reporting of CSI for PSCell during T3.

The test system shall send a RRC message to the UE to release PSCell (Cell 2) on radio channel 2. The RRC message to release PSCell (Cell2) shall be sent to the UE during period T3, after the UE has sent at least one CQI report with non-zero CQI index for PSCell (Cell 2). The point in time at which the RRC message to release PSCell (Cell2) is received at the UE antenna connector defines the start of period T4.

Table A.5.5.13.1.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
1	LTE FDD, NR TDD, SSB SCS 240 kHz, data SCS 120 kHz, BW 100 MHz
2	LTE TDD, NR TDD, SSB SCS 240 kHz, data SCS 120 kHz, BW 100 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.5.5.13.1.1-2: General Test Parameters for Conditional PSCell Addition and Release

Parameter		Unit	Value	Comment
RF Channel Number			1, 2	Two radio channels are used for this test. One for E-UTRA cell and second for NR Cell
Initial Condition	Active PCell		Cell1	PCell on RF channel number 1.
	Neighbour cell		Cell2	Neighbour cell on RF channel number 2.
Final Condition	Active PCell		Cell1	PCell on RF channel number 1.
	Neighbour Cell		Cell2	PSCell released on RF channel number 2.
B1	Hysteresis	dB	0	Hysteresis for evaluation of event B1.
	Threshold RSRP	dBm	-118	Actual RSRP threshold for event B1. Needs to take absolute accuracy tolerance in clause 9.1.11.1 into account plus margin.
	Time to Trigger	s	0	
DRX			OFF	Continuous monitoring of primary cell
Gap pattern ID			gp0	
PRACH configuration on cell2			FR2 configuration 2	Captured in A.3.8.3.2
Cell-individual offset for cells on RF channel number 1		dB	0	Individual offset for cells on primary component carrier.
Cell-individual offset for cells on RF channel number 2		dB	0	Individual offset for cells on carrier frequency of cell2.
T1		s	1	During this time the PCell shall be known and cell2 shall be unknown.
T2		s	<7	During this time the UE adds the PSCell.
T3		s	1	During this time the UE sends CSI reports for PSCell.
T4		s	1	During this time the UE releases the PSCell.

Table A.5.5.13.1.1-3: Cell Specific Parameters for Conditional PSCell Addition and Release

Parameter	Unit	Config	Test			
			T1	T2	T3	T4
E-UTRA Channel Number		1,2	1			
NR Channel Number		1,2	2			
Duplex Mode		1,2	TDD			

TDD configuration		1,2	TDDConf.3.1
$BW_{channel}$	MHz	1,2	100: $N_{RB,c}$ = 66
Data RBs allocated		1,2	48
Initial BWP Configuration		1,2	DLBWP.0.1 ULBWP.0.1
Dedicated BWP Configuration		1,2	DLBWP.1.1 ULBWP.1.1
TRS Configuration		1	TRS.2.1 TDD
PDSCH/PDCCH TCI state		1	TCI.State.2
PDSCH Reference measurement channel		1,2	SR.3.3 TDD
RMSI CORESET Reference Channel		1,2	CR.3.2 TDD
Dedicated CORESET Reference Channel		1,2	CCR.3.7 TDD
OCNG Patterns		1,2	OP.3
SSB configuration		1,2	SSB.2 FR2
SMTC configuration		1,2	SMTC.2
PDSCH/PDCCH subcarrier spacing	kHz	1,2	120
TRS Configuration		1,2	TRS.2.1 TDD
CSI-RS configuration for CSI reporting		1,2	CSI-RS.3.1 TDD
reportConfigType		1,2	periodic
reportQuantity		1,2	cri-RI-PMI-CQI
CSI reporting periodicity	slot	1,2	40
CSI reporting offset	slot	1,2	4
EPRE ratio of PSS to SSS	dB	1,2	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
Propagation condition		1,2	AWGN

Table A.5.5.13.1.1-4: OTA related test parameters

Parameter	Unit	Cell 2			
		T1	T2	T3	T4
Angle of arrival configuration		Setup 2a according to clause A.3.15.2.1			
Assumption for UE beams[Note 6]		Rough			
$\hat{E}s$ [Note2]	dBm/SCS	-∞	-81		
SSB_RP[Note2, Note 4]	dBm/SCS	-∞	-81		
$\hat{E}_s / I_{ot}$ BB [Note 2, Note 7]	dB	-∞	4.88		
Io[Note 2, Note 4]	dBm/95.04 MHz	N/A	-56.41		

Note 1:	Void
Note 2:	Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	Void
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5:	Void
Note 6:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 7:	Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.

A.5.5.13.1.2 Test Requirements

$T_{RRC_delay} + T_{Event_DU}$ occurs during T1 as the PSCell addition condition becomes satisfied at the start of T2. The test shall verify that there are no interruptions during T1.

The UE shall transmit the PRACH to PSCell (Cell 2) less than $T_{config_PSCell_Addition_Conditional}$ Note1 into T2.

The UE shall send at least one CSI report for PSCell with non-zero CQI index during T3.

The UE shall periodically send CSI reports for PSCell after the UE has sent first CQI report with non-zero CQI index during T3

The UE shall stop sending CSI reports for PSCell in at latest 20 ms into T4.

All the above test requirements shall be fulfilled for the observed PSCell addition delay and PSCell release delay to be counted as correct. The rate of correct observed PSCell addition delay and PSCell release delay during repeated tests shall be at least 90%.

Note1: The PSCell addition delay during T2 can be expressed as follows:

$$T_{config_PSCell_Addition_Conditional} = T_{measure} + T_{UE_preparation} + T_{processing} + T_{\Delta} + T_{PSCell_DU} + 2\ ms$$

Where:

$T_{measure}$ = 6720ms for power class 1 or 4160 for power class 2/3/4

$T_{UE_preparation}$ = 10ms

$T_{processing}$ = 40ms

T_{Δ} = 20ms

T_{PSCell_DU} = 1*10+10 = 20 ms

A.5.6 Measurement procedure

A.5.6.1 Intra-frequency Measurements

A.5.6.1.1 EN-DC event triggered reporting test without gap under non-DRX

A.5.6.1.1.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2. Supported test configurations are shown in table A.5.6.1.1.1-1.

Table A.5.6.1.1.1-1: supported test configurations

Configuration	Description
1	LTE FDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
3	LTE FDD, 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
4	LTE TDD, 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are three cells in the test, E-UTRAN PCell (Cell 1), FR2 PSCell (Cell 2) and a FR2 neighbour cell (Cell 3) on the same frequency as the PSCell. The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 and Cell 3 are given in Table A.5.6.1.1.1-2, A.5.6.1.1.1-3 and A.5.6.1.1.1-4 below.

In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 3.

Table A.5.6.1.1.1-2: General test parameters for intra-frequency event triggered reporting for EN-DC with TDD PSCell in FR2 without gap without DRX

Parameter	Unit	Config	Value	Comment
Active cell		1~4	E-UTRAN PCell (Cell 1) PSCell (Cell 2)	
Neighbour cell		1~4	Cell 3	Cell to be identified.
RF Channel Number		1~4	1: Cell 1 2: Cell 2 and Cell 3	One TDD carrier frequency is used for the NR cells and one TDD or FDD carrier frequency is used for E-UTRAN cell.
SMTC configuration		1~4	SMTC.1	
A3-Offset	dB	1~4	-11	
CP length		1~4	Normal	
Hysteresis	dB	1~4	0	
Time To Trigger	s	1~4	0	
Filter coefficient		1~4	0	L3 filtering is not used
DRX		1~4	OFF	
Time offset between Cell 1 and Cell 2		1~4	3 μs	Synchronous EN-DC
Time offset between Cell 2 and Cell 3		1~4	3 μs	Synchronous cells
T1	s	1~4	5	
T2	s	1~4	5	

Table A.5.6.1.1.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for EN-DC with TDD PSCell in FR2 without gap without DRX

Parameter	Unit	Config	Cell 2		Cell 3	
			T1	T2	T1	T2
TDD configuration		1~4	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	1~4	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		1,2	24		24	
		3,4	48		48	
Intial BWP configuration		1~4	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1~4	DLBWP.1.1		DLBWP.1.1	

Active UL BWP configuration		1~4	ULBWP.1.1	ULBWP.1.1
RLM-RS		1~4	SSB	SSB
PDSCH RMC configuration		1,2	SR.3.2 TDD	N/A
		3,4	SR.3.3 TDD	
RMSI CORESET RMC configuration		1,2	CR.3.1 TDD	N/A
		3,4	CR.3.2 TDD	N/A
Dedicated CORESET RMC configuration		1,2	CCR.3.1 TDD	N/A
		3,4	CCR.3.7 TDD	N/A
PDSCH/PDCCH subcarrier spacing	kHz	1~4	120	120
OCNG Patterns		1~4	OP.5	N/A
TRS configuration		1~4	TRS.2.1 TDD	N/A
PDSCH/PDCCH TCI state		1~4	TCI.State.2	N/A
cellIndividualOffset	dB	1~4	N/A	16
SSB configuration		1, 2	SSB.3 FR2	SSB.7 FR2
		3, 4	SSB.4 FR2	SSB.8 FR2
Propagation Condition		1~4	AWGN	AWGN

Table A.5.6.1.1.1-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for EN-DC with TDD PSCell in FR2 without gap without DRX

Parameter	Unit	Config	Cell 2		Cell 3	
			T1	T2	T1	T2
AoA setup		1~4	Setup 3 defined in A.3.15.3			
			AoA1		AoA2	
Assumption for UE beams[Note 4]		1~4	Rough		Rough	
	dBm/SCS	1, 2	-89	-89	-Infinity	-89
		3, 4	-86	-86	-Infinity	-86
$\hat{E}_s/I_{ot}$ BB [Note 5]	dB	1~4	-0.12	-0.12	-Infinity	-0.12
SSB_RP	dBm/SCS	1, 2	-89	-89	-Infinity	-89
		3, 4	-86	-86	-Infinity	-86
Io	dBm/95.04MHz	1,2	-64.41	-64.41	-Infinity	-64.41
		3,4	-61.41	-61.41	-Infinity	-61.41
Time multiplexing of the downlink transmissions from each AoA		1~4	Defined in Figure A.5.6.1.1.1-1			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Void
Note 3: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.
Note 5: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

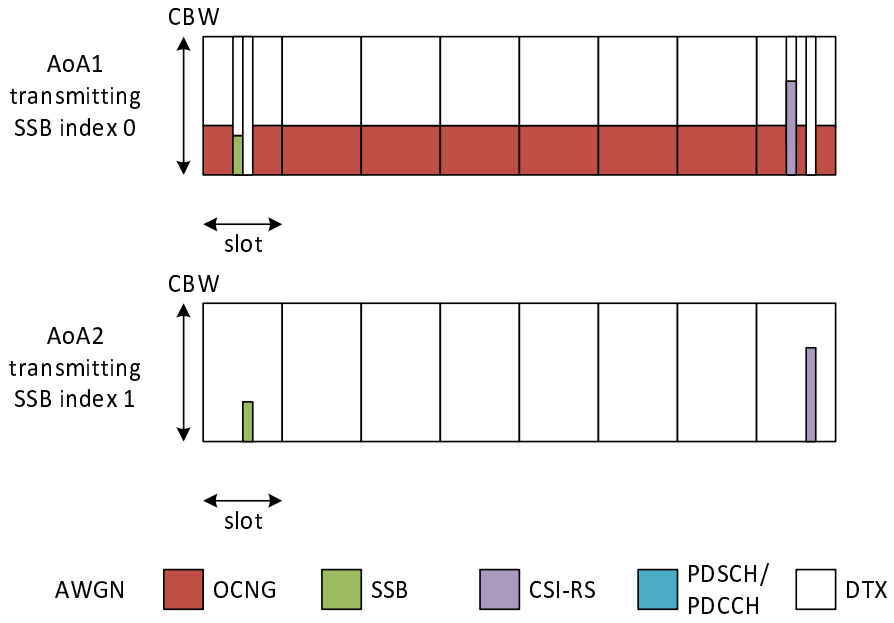

Figure A.5.6.1.1.1-1: Time multiplexed downlink transmissions (Config 1,2 example)

A.5.6.1.1.2 Test Requirements

In the test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 2.4s for a UE supporting power class 1,
- 1.44s for a UE supporting power class 2, 3 and 4

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to 2xTTIDCCH higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.5.6.1.2 EN-DC event triggered reporting test without gap under DRX

A.5.6.1.2.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2. Supported test configurations are shown in table A.5.6.1.2.1-1.

Table A.5.6.1.2.1-1: supported test configurations

Configuration	Description
1	LTE FDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
3	LTE FDD, 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

4	LTE TDD, 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are three cells in the test, E-UTRAN PCell (Cell 1), FR2 PSCell (Cell 2) and a FR2 neighbour cell (Cell 3) on the same frequency as the PSCell. The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 and Cell 3 are given in Table A.5.6.1.2.1-2 ~ Table A.5.6.1.2.1-6 below.

In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 3.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furhtermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.5.6.1.2.1-2: General test parameters for intra-frequency event triggered reporting for EN-DC with TDD PSCell in FR2 without gap with DRX

Parameter	Unit	Config	Value		Comment
			Test 1	Test 2	
Active cell		1~4	E-UTRAN PCell (Cell 1) PSCell (Cell 2)		
Neighbour cell		1~4	Cell 3		Cell to be identified.
RF Channel Number		1~4	1: Cell 1 2: Cell 2 and Cell 3		One TDD carrier frequency is used for the NR cells and one TDD or FDD carrier frequency is used for E-UTRAN cell.
SMTC configuration		1~4	SMTC.1		
A3-Offset	dB	1~4	-6		
CP length		1~4	Normal		
Hysteresis	dB	1~4	0		
Time To Trigger	s	1~4	0		
Filter coefficient		1~4	0		L3 filtering is not used
DRX		1~4	DRX.1	DRX.7	DRX related parameters are defined in Table A.5.6.1.2.1-4
Time offset between Cell 1 and Cell 2		1~4	3 μs		Synchronous EN-DC
Time offset between Cell 2 and Cell 3		1~4	3 μs		Synchronous cells
T1	s	1~4	5		
T2	s	1~4	10	52	

Table A.5.6.1.2.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for EN-DC with TDD PSCell in FR2 without gap with DRX

Parameter	Unit	Config	Cell 2		Cell 3	
			T1	T2	T1	T2
TDD configuration		1~4	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	1~4	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		1~4	66		66	
Intial BWP configuration		1~4	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1~4	DLBWP.1.1		DLBWP.1.1	

Active UL BWP configuration		1~4	ULBWP.1.1	ULBWP.1.1
RLM-RS		1~4	SSB	SSB
PDSCH RMC configuration		1,2	SR.3. 2 TDD	N/A
		3,4	SR.3.3 TDD	
RMSI CORESET RMC configuration		1,2	CR.3.1 TDD	N/A
		3,4	CR.3.2 TDD	N/A
Dedicated CORESET RMC configuration		1,2	CCR.3.1 TDD	N/A
		3,4	CCR.3.7 TDD	N/A
PDSCH/PDCCH subcarrier spacing	kHz	1~4	120	120
OCNG Patterns		1~4	OP.1	OP.1
PDSCH/PDCCH TCI state		1~4	TCI.State.2	N/A
CSI-RS for tracking			TRS.2.1 TDD	N/A
			TRS.2.1 TDD	N/A
SSB configuration		1, 2	SSB.3 FR2	SSB.3 FR2
		3, 4	SSB.4 FR2	SSB.4 FR2
Propagation Condition		1~4	AWGN	AWGN

Table A.5.6.1.2.1-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for EN-DC with TDD PSCell in FR2 without gap with DRX

Parameter	Unit	Config	Cell 2		Cell 3	
			T1	T2	T1	T2
AoA setup		1~4	Setup 1 defined in A.3.15.1			
Assumption for UE beams Note 4		1~4	Rough		Rough	
$\hat{E}_s/I_{ot}$ BB Note 5	dB	1~4	3.77	-1.52	-Infinity	-1.52
N_{oc} Note 2	dBm/15 KHz	1~4	-98			
N_{oc} Note 2	dBm/SCS	1, 2	-89			
		3, 4	-86			
SSB_RP	dBm/SCS	1, 2	-85	-85	-Infinity	-85
		3, 4	-82	-82	-Infinity	-82
$\hat{E}_s/N_{oc}$	dB	1~4	4	4	-Infinity	4
Io	dBm/95.04MHz	1~4	-54.53	-52.18	See Cell 2 columns	

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.

Note 5: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

A.5.6.1.2.2 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 7.2s for a UE supporting power class 1,
- 4.32s for a UE supporting power class 2, 3 and 4

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 51.2s for a UE supporting power class 1,
- 30.72s for a UE supporting power class 2, 3 and 4

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.5.6.1.3 EN-DC event triggered reporting test with per-UE gaps under non-DRX

A.5.6.1.3.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2. Supported test configurations are shown in table A.5.6.1.3.1-1.

Table A.5.6.1.3.1-1: supported test configurations

Configuration	Description
1	LTE FDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
3	LTE FDD, 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
4	LTE TDD, 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are three cells in the test, E-UTRAN PCell (Cell 1), FR2 PSCell (Cell 2) and a FR2 neighbour cell (Cell 3) on the same frequency as the PSCell. The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 and Cell 3 are given in Table A.5.6.1.3.1-2 ~ 4 below.

There are two BWPs configured in Cell 2, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 2. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 3.

Table A.5.6.1.3.1-2: General test parameters for intra-frequency event triggered reporting for EN-DC with TDD PSCell in FR2 with per-UE gaps without DRX

Parameter	Unit	Config	Value	Comment

Active cell		1~4	E-UTRAN PCell (Cell 1) PSCell (Cell 2)	
Neighbour cell		1~4	Cell 3	Cell to be identified.
RF Channel Number		1~4	1: Cell 1 2: Cell 2 and Cell 3	One TDD carrier frequency is used for the NR cells and one TDD or FDD carrier frequency is used for E-UTRAN cell.
Gap type		1~4	Per-UE gaps	
Measurement gap repitition periodicity	ms	1~4	40	
Measurement gap length	ms	1~4	6	
Measurement gap offset	ms	1~4	39	
SMTC configuration		1~4	SMTC.1	
CSI-RS parameters		1~4	CSI-RS.3.2 TDD resource #0	Resource #1 is not used
A3-Offset	dB	1~4	-11	
CP length		1~4	Normal	
Hysteresis	dB	1~4	0	
Time To Trigger	s	1~4	0	
Filter coefficient		1~4	0	L3 filtering is not used
DRX		1~4	OFF	
Time offset between Cell 1 and Cell 2		1~4	3 μs	Synchronous EN-DC
Time offset between Cell 2 and Cell 3		1~4	3 μs	Synchronous cells
T1	s	1~4	5	
T2	s	1~4	5	

Table A.5.6.1.3.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for EN-DC with TDD PSCell in FR2 with per-UE gaps without DRX

Parameter	Unit	Config	Cell 2		Cell 3	
			T1	T2	T1	T2
TDD configuration		1~4	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	1~4	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		1,2	24		24	
		3,4	48		48	
Intial BWP configuration		1~4	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1~4	DLBWP.1.2		DLBWP.1.1	
Active UL BWP configuration		1~4	ULBWP.1.2		ULBWP.1.1	
RLM-RS		1~4	CSI-RS		SSB	
PDSCH RMC configuration		1,2	SR.3.2 TDD		N/A	
		3,4	SR.3.3 TDD			
RMSI CORESET RMC configuration		1,2	CR.3.1 TDD		N/A	
		3,4	CR.3.2 TDD		N/A	
Dedicated CORESET RMC configuration		1,2	CCR.3.1 TDD		N/A	
		3,4	CCR.3.7 TDD		N/A	
TRS configuration		1~4	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI state		1~4	TCI.State.2		N/A	
PDSCH/PDCCH subcarrier spacing	kHz	1~4	120		120	

OCNG Patterns		1~4	OP.5	N/A
cellIndividualOffset	dB	1~4	N/A	16
SSB		1, 2	SSB.3 FR2	SSB.7 FR2
		3, 4	SSB.4 FR2	SSB.8 FR2
Propagation Condition		1~4	AWGN	AWGN

Table A.5.6.1.3.1-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for EN-DC with TDD PSCell in FR2 with per-UE gaps without DRX

Parameter	Unit	Config	Cell 2		Cell 3	
			T1	T2	T1	T2
AoA setup		1~4	Setup 3 defined in A.3.15.3			
			AoA1		AoA2	
Assumption for UE beams Note 4		1~4	Rough		Rough	
E_s	dBm/SCS	1, 2	-89	-89	-Infinity	-89
		3, 4	-86	-86	-Infinity	-86
$\hat{E}_s / I_{ot}$ BB Note 5	dB	1~4	-0.12	-0.12	-Infinity	-0.12
SSB_RP	dBm/SCS	1, 2	-89	-89	-Infinity	-89
		3, 4	-86	-86	-Infinity	-86
Io	dBm/95.04MHz	1,2	-64.41	-64.41	-Infinity	-64.41
		3,4	-61.41	-61.41	-Infinity	-61.41
Time multiplexing of the downlink transmissions from each AoA		1~4	Defined in Figure A.5.6.1.3.1-1			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Void
Note 3: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.
Note 5: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

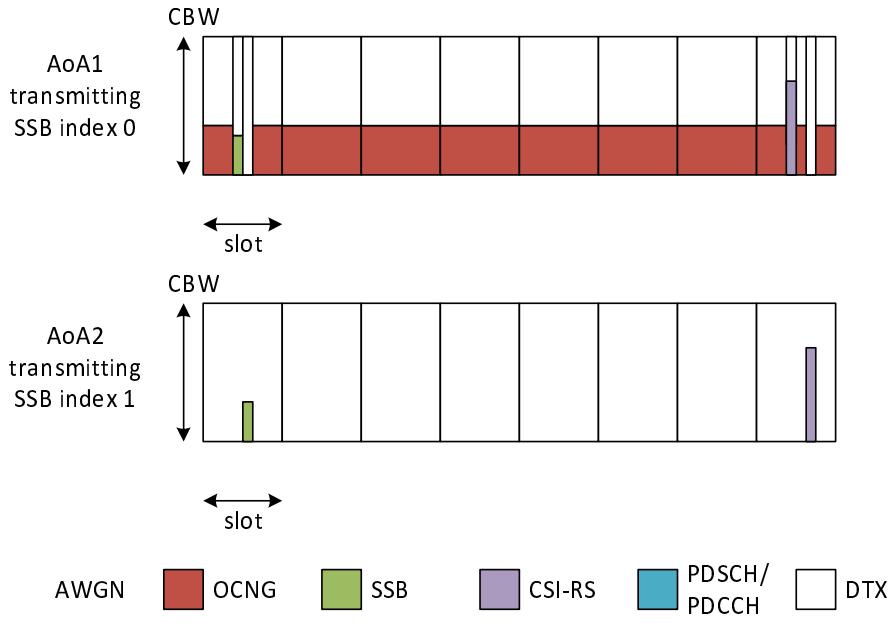

Figure A.5.6.1.3.1-1: Time multiplexed downlink transmissions (Config 1,2 example)

A.5.6.1.3.2 Test Requirements

In the test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 3.2s for a UE supporting power class 1,
- 1.92s for a UE supporting power class 2, 3 and 4

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.5.6.1.4 EN-DC event triggered reporting test with per-UE gaps under DRX

A.5.6.1.4.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2. Supported test configurations are shown in table A.5.6.1.4.1-1.

Table A.5.6.1.4.1-1: supported test configurations

Configuration	Description
1	LTE FDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
3	LTE FDD, 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

4	LTE TDD, 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are three cells in the test, E-UTRAN PCell (Cell 1), FR2 PSCell (Cell 2) and a FR2 neighbour cell (Cell 3) on the same frequency as the PSCell. The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 and Cell 3 are given in Table A.5.6.1.4.1-2 ~ 6.

During the test, Cell 2 and Cell 3 are transmitted from the direction determined according to A3.8.

There are two BWPs configured in Cell 2, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 2. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 3.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furhtermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.5.6.1.4.1-2: General test parameters for intra-frequency event triggered reporting for EN-DC with TDD PSCell in FR2 with per-UE gaps with DRX

Parameter	Unit	Config	Value		Comment
			Test 1	Test 2	
Active cell		1~4	E-UTRAN PCell (Cell 1) PSCell (Cell 2)		
Neighbour cell		1~4	Cell 3		Cell to be identified.
RF Channel Number		1~4	1: Cell 1 2: Cell 2 and Cell 3		One TDD carrier frequency is used for the NR cells and one TDD or FDD carrier frequency is used for E-UTRAN cell.
Gap type		1~4	Per-UE gaps		
Measurement gap repitition periodicity	ms	1~4	40		
Measurement gap length	ms	1~4	6		
Measurement gap offset	ms	1~4	39		
SMTC configuration		1~4	SMTC.1		
CSI-RS parameters		1~4	CSI-RS.3.2 TDD resource #0		Resource #1 is not used
A3-Offset	dB	1~4	-6		
CP length		1~4	Normal		
Hysteresis	dB	1~4	0		
Time To Trigger	s	1~4	0		
Filter coefficient		1~4	0		L3 filtering is not used
DRX		1~4	DRX.1	DRX.7	DRX related parameters are defined in Table A.5.6.1.4.1-5
Time offset between Cell 1 and Cell 2		1~4	3 μs		Synchronous EN-DC
Time offset between Cell 2 and Cell 3		1~4	3 μs		Synchronous cells
T1	s	1~4	5		
T2	s	1~4	10	52	

Table A.5.6.1.4.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for EN-DC with TDD PSCell in FR2 with per-UE gaps with DRX

Parameter	Unit	Config	Cell 2		Cell 3	
			T1	T2	T1	T2
TDD configuration		1~4	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	1~4	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		1~4	66		66	
Intial BWP configuration		1~4	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1~4	DLBWP.1.2		DLBWP.1.1	
Active UL BWP configuration		1~4	ULBWP.1.2		ULBWP.1.1	
RLM-RS		1~4	CSI-RS		SSB	
PDSCH RMC configuration		1,2	SR.3.2 TDD		N/A	
		3,4	SR.3.3 TDD			
RMSI CORESET RMC configuration		1,2	CR.3.1 TDD		N/A	
		3,4	CR.3.2 TDD		N/A	
Dedicated CORESET RMC configuration		1,2	CCR.3.1 TDD		N/A	
		3,4	CCR.3.7 TDD		N/A	
TRS configuration		1~4	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI state		1~4	TCI.State.2		N/A	
PDSCH/PDCCH subcarrier spacing	kHz	1~4	120		120	
OCNG Patterns		1~4	OP.1		OP.1	
SSB		1, 2	SSB.3 FR2		SSB.3 FR2	
		3, 4	SSB.4 FR2		SSB.4 FR2	
Propagation Condition		1~4	AWGN		AWGN	

Table A.5.6.1.4.1-4: NR Cell specific test parameters for intra-frequency event triggered reporting for EN-DC with TDD PSCell in FR2 with per-UE gaps with DRX

Parameter	Unit	Config	Cell 2		Cell 3	
			T1	T2	T1	T2
AoA setup		1~4	Setup 1 defined in A.3.15.1			
Assumption for UE beams[Note 4]		1~4	Rough		Rough	
$\hat{E}_s / I_{ot}$ [BB Note 5]	dB	1~4	3.77	-1.52	-Infinity	-1.52
N_{oc} [Note 2]	dBm/15 KHz	1~4	-98			
N_{oc} [Note 2]	dBm/SCS	1, 2	-89			
		3, 4	-86			
SSB_RP	dBm/SCS	1, 2	-85	-85	-Infinity	-85
		3, 4	-82	-82	-Infinity	-82
$\hat{E}_s / N_{oc}$	dB	1~4	4	4	-Infinity	4
Io	dBm/95.04MHz	1~4	-54.53	-52.18	See Cell 2 columns	

Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.
Note 5:	Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

Table A.5.6.1.4.1-5: Void

Table A.5.6.1.4.1-6: Void

A.5.6.1.4.2 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 7.2s for a UE supporting power class 1,
- 4.32s for a UE supporting power class 2, 3 and 4

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 51.20s for a UE supporting power class 1,
- 30.72s for a UE supporting power class 2, 3 and 4

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.5.6.2 Inter-frequency Measurements

A.5.6.2.1 EN-DC event triggered reporting tests for FR2 cell without SSB time index detection when DRX is not used

A.5.6.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR2 on NR RF channel 1 and NR cell 3 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.5.6.2.1.1-1, A.5.6.2.1.1-2, and A.5.6.2.1.1-3.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.5.6.2.1.1-2 is provided for UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #13 as defined in Table A.5.6.2.1.1-2 is provided for UE that supports per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 2. Otherwise it is only required to pass test 1.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.2-1. Supported test configurations are shown in table A.5.6.2.1.1-1.

Table A.5.6.2.1.1-1 EN-DC event triggered reporting tests without SSB index reading for FR2-FR2

Config	Description
1	LTE FDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.5.6.2.1.1-2: General test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		Config 1,2	1		One E-UTRAN TDD carrier frequency is used.
NR RF Channel Number		Config 1,2	1, 2		Two FR2 NR carrier frequencies are used.
Active cell		Config 1,2	LTE Cell 1 (PCell) and NR cell 2 (PScell)		LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.
Neighbour cell		Config 1,2	NR cell 3		NR cell 3 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2	0	13	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2	39	39	
SMTC-SSB parameters		Config 1,2	SSB.3 FR2		As specified in clause A.3.10.2
offsetMO	dB	Config 1,2	16		Applied to NR Cell 3 measurement object
A3-Offset	dB	Config 1,2	-11		
Hysteresis	dB	Config 1,2	0		
CP length		Config 1,2	Normal		
TimeToTrigger	s	Config 1,2	0		
Filter coefficient		Config 1,2	0		L3 filtering is not used
DRX		Config 1,2	OFF		DRX is not used
Time offset between PCell and PSCell		Config 1,2	3 μs		Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,2	3μs		Synchronous cells.
T1	s	Config 1,2	5		

T2	s	Config 1,2	5.2 for PC1; 3.5 for other PC	5.2 for PC1; 3.5 for other PC	

Table A.5.6.2.1.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
AoA setup		Config 1,2	Setup 3 as specified in clause A.3.15			
			AoA1		AoA2	
Assumption for UE beams[Note 7]		Config 1,2	Rough		Rough	
NR RF Channel Number		Config 1,2	1		2	
Duplex mode		Config 1,2	TDD		TDD	
$BW_{channel}$	MHz	Config 1,2	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		Config 1,2	66		66	
BWP BW	MHz	Config 1,2	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
TDD configuration		Config 1,2	TDDConf.3.1		TDDConf.3.1	
Initial DL BWP		Config 1,2	DLBWP.0.1		NA	
Initial UL BWP		Config 1,2	ULBWP.0.1		NA	
Dedicated DL BWP		Config 1,2	DLBWP.1.1		NA	
Dedicated UL BWP		Config 1,2	ULBWP.1.1		NA	
OCNG Patterns defined in A.3.2.1.1		Config 1,2	OP.1		OP.1	
TRS configuration		Config 1,2	TRS.2.1 TDD		NA	
PDSCH/PDCCH TCI state		Config 1,2	TCI.State.2		NA	
PDSCH Reference measurement channel		Config 1,2	SR.3.1 TDD		-	
RMSI CORESET Reference Channel		Config 1,2	CR.3.1 TDD		-	
Dedicated CORESET Reference Channel		Config 1,2	CCR.3.1 TDD		-	
SMTC configuration defined in A.3.11		Config 1,2	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2	120		120	
EPRE ratio of PSS to SSS		Config 1,2	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						

EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
$\hat{E}_s$	dBm/SCS	Config 1,2	-87	-87	-Infinity	-87
SSBRP Note 3	dBm/SCS Note5	Config 1,2	-87	-87	-Infinity	-87
$\hat{E}_s / I_{ot}$ BB Note 8	dB	Config 1,2	1.89	1.89	-Infinity	1.89
Io Note3	dBm/95.04 MHz Note5	Config 1,2	-58.01	-58.01	-Infinity	-58.01
Propagation Condition		Config 1,2	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: VoidNote 3: SSBRP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: VoidNote 5: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 6: As observed with 0dBi gain antenna at the centre of the quiet zone.
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.
Note 8: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.

A.5.6.2.1.2 Test Requirements

In test 1 with per-UE gap and in test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

5120 for UE supporting power class 1, or

3200 for UE supporting other power class.

In test 1 and 2 UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.5.6.2.2 EN-DC event triggered reporting tests for FR2 cell without SSB time index detection when DRX is used

A.5.6.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR2 on NR RF channel 1 and NR cell 3 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.5.6.2.2.1-1, A.5.6.2.2.1-2, and A.5.6.2.2.1-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table A.5.6.2.2.1-2 is provided for UE that does not support per-FR gap and in test 3&4 measurement gap pattern configuration #13 as defined in Table A.5.6.2.2.1-2 is provided for UE that supports per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 3&4. Otherwise it is only required to pass test 1&2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.2-1. Supported test configurations are shown in table A.5.6.2.2.1-1.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furhtermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.5.6.2.2.1-1 EN-DC event triggered reporting tests without SSB index reading for FR2-FR2

Config	Description
1	LTE FDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.5.6.2.2.1-2: General test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

Parameter	Unit	Test configuration	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
E-UTRA RF Channel Number		Config 1,2	1				One E-UTRAN TDD carrier frequenciy is used.
NR RF Channel Number		Config 1,2	1, 2				Two FR2 NR carrier frequencies are used.
Active cell		Config 1,2	LTE Cell 1 (PCell) and NR cell 2 (PScell)				LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.
Neighbour cell		Config 1,2	NR cell 3				NR cell 3 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2	0		13		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2	39		39		
SMTC-SSB parameters		Config 1,2	SSB.3 FR2				As specified in clause A.3.10.2
A3-Offset	dB	Config 1,2	-6				
Hysteresis	dB	Config 1,2	0				
CP length		Config 1,2	Normal				
TimeToTrigger	s	Config 1,2	0				
Filter coefficient		Config 1,2	0				L3 filtering is not used
DRX		Config 1,2	DRX .1	DRX .7	DRX .1	DRX .7	As specified in clause A.3.3
Time offset between PCell and PSCell		Config 1,2	3 μs				Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,2	3μs				Synchronous cells.

T1	s	Config 1,2	5				
T2	s	Config 1,2	8 for PC1; 5 for other PC	82 for PC1; 52 for other PC	8 for PC1; 5 for other PC	82 for PC1; 52 for other PC	

Table A.5.6.2.2.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
AoA setup		Config 1,2	Setup 1 as specified in clause A.3.15			
Assumption for UE beams[Note 7]		Config 1,2	Rough		Rough	
NR RF Channel Number		Config 1,2	1		2	
Duplex mode		Config 1,2	TDD		TDD	
$BW_{channel}$	MHz	Config 1,2	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		Config 1,2	66		66	
BWP BW	MHz	Config 1,2	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
TDD configuration		Config 1,2	TDDConf.3.1		TDDConf.3.1	
Initial DL BWP		Config 1,2	DLBWP.0.1		NA	
Initial UL BWP		Config 1,2	ULBWP.0.1			
Dedicated DL BWP		Config 1,2	DLBWP.1.1		NA	
Dedicated UL BWP		Config 1,2	ULBWP.1.1		NA	
OCNG Patterns defined in A.3.2.1.1		Config 1,2	OP.1		OP.1	
TRS configuration		Config 1,2	TRS.2.1 TDD		NA	
PDSCH/PDCCH TCI state		Config 1,2	TCI.State.2		NA	
PDSCH Reference measurement channel		Config 1,2	SR.3.1 TDD		-	
RMSI CORESET Reference Channel		Config 1,2	CR.3.1 TDD		-	
Dedicated CORESET Reference Channel		Config 1,2	CCR.3.1 TDD		-	
SMTC configuration defined in A.3.11		Config 1,2	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2	120		120	
EPRE ratio of PSS to SSS		Config 1,2	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						

EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15kHz Note5		-104.7		-104.7	
N_{oc} Note2	dBm/SCS Note4	Config 1,2	-95.7		-95.7	
SS-RSRP Note 3	dBm/SCS Note5	Config 1,2	-89.7	-89.7	-Infinity	-86.7
$\hat{E}_s / I_{ot}$	dB	Config 1,2	6	6	-Infinity	9
$\hat{E}_s / N_{oc}$	dB	Config 1,2	6	6	-Infinity	9
Io Note3	dBm/95.04 MHz Note5	Config 1,2	-59.7	-59.7	-66.7	-57.2
Propagation Condition		Config 1,2	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Void
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.5.6.2.2.2 Test Requirements

In test 1 with per-UE gap and in test 3 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X1 ms from the beginning of time period T2, where X1 is

7680 for UE supporting power class 1, or

4800 for UE supporting other power class.

In test 2 with per-UE gap and in test 4 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X2 ms from the beginning of time period T2, where X2 is

81920 for UE supporting power class 1, or

51200 for UE supporting other power class.

In test 1, 2, 3 and 4 UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.5.6.2.3 EN-DC event triggered reporting tests for FR2 cell with SSB time index detection when DRX is not used

A.5.6.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR2 on NR RF channel 1 and NR cell 3 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.5.6.2.3.1-1, A.5.6.2.3.1-2, and A.5.6.2.3.1-3.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.5.6.2.3.1-1 is provided for UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #13 as defined in Table A.5.6.2.3.1-1 is provided for UE that supports per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 2. Otherwise it is only required to pass test 1.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.2-1. Supported test configurations are shown in table A.5.6.2.3.1-1.

Table A.5.6.2.3.1-1 EN-DC event triggered reporting tests with SSB index reading for FR2-FR2

Config	Description
1	LTE FDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.5.6.2.3.1-2: General test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		Config 1,2	1		One E-UTRAN TDD carrier frequency is used.
NR RF Channel Number		Config 1,2	1, 2		Two FR2 NR carrier frequencies are used.
Active cell		Config 1,2	LTE Cell 1 (PCell) and NR cell 2 (PScell)		LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.
Neighbour cell		Config 1,2	NR cell 3		NR cell 3 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2	0	13	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2	39	39	
SMTC-SSB parameters		Config 1,2	SSB.3 FR2		As specified in clause A.3.10.2
offsetMO	dB	Config 1,2	16		Applied to NR Cell 3 measurement object
A3-Offset	dB	Config 1,2	-11		
Hysteresis	dB	Config 1,2	0		

CP length		Config 1,2	Normal		
TimeToTrigger	s	Config 1,2	0		
Filter coefficient		Config 1,2	0		L3 filtering is not used
DRX		Config 1,2	OFF		DRX is not used
Time offset between PCell and PSCell		Config 1,2	3 μs		Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,2	3μs		Synchronous cells.
T1	s	Config 1,2	5		
T2	s	Config 1,2	7 for PC1; 4.5 for other PC	7 for PC1; 4.5 for other PC	

Table A.5.6.2.3.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
AoA setup		Config 1,2	Setup 3 as specified in clause A.3.15			
			AoA1		AoA2	
Assumption for UE beams[Note 7]		Config 1,2	Rough		Rough	
NR RF Channel Number		Config 1,2	1		2	
Duplex mode		Config 1,2	TDD		TDD	
$BW_{channel}$	MHz	Config 1,2	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		Config 1,2	66		66	
BWP BW	MHz	Config 1,2	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
TDD configuration		Config 1,2	TDDConf.3.1		TDDConf.3.1	
Initial DL BWP		Config 1,2	DLBWP.0.1		NA	
Initial UL BWP		Config 1,2	DLBWP.0.1		N/A	
Dedicated DL BWP		Config 1,2	DLBWP.1.1		NA	
Dedicated UL BWP		Config 1,2	ULBWP.1.1		NA	
OCNG Patterns defined in A.3.2.1.1		Config 1,2	OP.1		OP.1	
PDSCH Reference measurement channel		Config 1,2	SR.3.1 TDD		-	
RMSI CORESET Reference Channel		Config 1,2	CR.3.1 TDD		-	
Dedicated CORESET Reference Channel		Config 1,2	CCR.3.1 TDD		-	
TRS configuration		Config 1,2	TRS.2.1 TDD		NA	
PDSCH/PDCCH TCI state		Config 1,2	TCI.State.2		NA	
SMTC configuration defined in A.3.11		Config 1,2	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2	120		120	

EPRE ratio of PSS to SSS		Config 1,2	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
$\hat{E}_s$	dBm/SCS	Config 1	-87	-87	-Infinity	-87
SSBRP Note 3	dBm/SCS Note5	Config 1,2	-87	-87	-Infinity	-87
$\hat{E}_s / I_{ot}$ BB Note 8	dB	Config 1,2	1.89	1.89	-Infinity	1.89
Io Note3	dBm/95.04 MHz Note5	Config 1,2	-58.01	-58.01	-Infinity	-58.01
Propagation Condition		Config 1,2	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: SSBRP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: VoidNote 5: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 6: As observed with 0dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 8: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.

A.5.6.2.3.2 Test Requirements

In test 1 with per-UE gap and in test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

6720 for UE supporting power class 1, or

4160 for UE supporting other power class.

In test 1 and 2 UE is required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.5.6.2.4 EN-DC event triggered reporting tests for FR2 cell with SSB time index detection when DRX is used

A.5.6.2.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR2 on NR RF channel 1 and NR cell 3 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.5.6.2.4.1-1, A.5.6.2.4.1-2, and A.5.6.2.4.1-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table A.5.6.2.4.1-2 is provided for UE that does not support per-FR gap and in test 3&4 measurement gap pattern configuration #13 as defined in Table A.5.6.2.4.1-2 is provided for UE that supports per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 3&4. Otherwise it is only required to pass test 1&2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.2-1. Supported test configurations are shown in table A.5.6.2.4.1-1.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furhtermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.5.6.2.4.1-1: EN-DC event triggered reporting tests with SSB index reading for FR2-FR2

Config	Description
1	LTE FDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.5.6.2.4.1-2: General test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

Parameter	Unit	Test configuration	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
E-UTRA RF Channel Number		Config 1,2	1				One E-UTRAN TDD carrier frequency is used.
NR RF Channel Number		Config 1,2	1, 2				Two FR2 NR carrier frequencies are used.
Active cell		Config 1,2	LTE Cell 1 (PCell) and NR cell 2 (PScell)				LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.
Neighbour cell		Config 1,2	NR cell 3				NR cell 3 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2	0		13		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2	39		39		
SMTC-SSB parameters		Config 1,2	SSB.3 FR2				As specified in clause A.3.10.2
A3-Offset	dB	Config 1,2	-6				
Hysteresis	dB	Config 1,2	0				

CP length		Config 1,2	Normal				
TimeToTrigger	s	Config 1,2	0				
Filter coefficient		Config 1,2	0				L3 filtering is not used
DRX		Config 1,2	DRX .1	DRX .7	DRX .1	DRX .7	As specified in clause A.3.3
Time offset between PCell and PSCell		Config 1,2	3 μs				Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,2	3μs				Synchronous cells.
T1	s	Config 1,2	5				
T2	s	Config 1,2	11 for PC1; 6.5 for other PC	108 for PC1; 67 for other PC	11 for PC1; 6.5 for other PC	108 for PC1; 67 for other PC	

Table A.5.6.2.4.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
AoA setup		Config 1,2	Setup 1 as specified in clause A.3.15			
Assumption for UE beams[Note 7]		Config 1,2	Rough		Rough	
NR RF Channel Number		Config 1,2	1		2	
Duplex mode		Config 1,2	TDD		TDD	
$BW_{channel}$	MHz	Config 1,2	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		Config 1,2	66		66	
BWP BW	MHz	Config 1,2	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
TDD configuration		Config 1,2	TDDConf.3.1		TDDConf.3.1	
Initial DL BWP		Config 1,2	DLBWP.0.1		NA	
Initial UL BWP		Config 1,2	ULBWP.0.1			
Dedicated DL BWP		Config 1,2	DLBWP.1.1		NA	
Dedicated UL BWP		Config 1,2	ULBWP.1.1		NA	
OCNG Patterns defined in A.3.2.1.1		Config 1,2	OP.1		OP.1	
PDSCH Reference measurement channel		Config 1,2	SR.3.1 TDD		-	
RMSI CORESET Reference Channel		Config 1,2	CR.3.1 TDD		-	
Dedicated CORESET Reference Channel		Config 1,2	CCR.3.1 TDD		-	
TRS configuration		Config 1,2	TRS.2.1 TDD		NA	
PDSCH/PDCCH TCI state		Config 1,2	TCI.State.2		NA	
SMTC configuration defined in A.3.11		Config 1,2	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2	120		120	
EPRE ratio of PSS to SSS		Config 1,2	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						

EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15 kHz Note5		-104.7		-104.7	
N_{oc} Note2	dBm/SCS Note4	Config 1,2	-95.7		-95.7	
SSB_RP Note 3	dBm/SCS Note5	Config 1,2	-89.7	-89.7	-Infinity	-86.7
$\hat{E}_s / I_{ot}$	dB	Config 1,2	6	6	-Infinity	9
$\hat{E}_s / N_{oc}$	dB	Config 1,2	6	6	-Infinity	9
Io Note3	dBm/95.04 MHz Note5	Config 1,2	-59.7	-59.7	-66.7	-57.2
Propagation Condition		Config 1,2	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Void
Note 5: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 6: As observed with 0dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.5.6.2.4.2 Test Requirements

In test 1 with per-UE gap and in test 3 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X1 ms from the beginning of time period T2, where X1 is

10080 for UE supporting power class 1, or

6240 for UE supporting other power class.

In test 2 with per-UE gap and in test 4 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X2 ms from the beginning of time period T2, where X2 is

107520 for UE supporting power class 1, or

66560 for UE supporting other power class.

In test 1, 2, 3 and 4 UE is required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.5.6.2.5 EN-DC event triggered reporting tests for FR2 cell without SSB time index detection when DRX is not used

A.5.6.2.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 on NR RF channel 1 and NR cell 3 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.5.6.2.5.1-1, A.5.6.2.5.1-2, and A.5.6.2.5.1-3.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.5.6.2.5.1-2 is provided for a UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #13 as defined in Table A.5.6.2.5.1-2 is provided for UE that support per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 2. Otherwise it is only required to pass test 1.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A4 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.1-1. Supported test configurations are shown in table A.5.6.2.5.1-1.

Table A.5.6.2.5.1-1: EN-DC event triggered reporting tests without SSB index reading for FR1-FR2

Config	Description of serving cell	Description of target cell
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	
Note: The UE is only required to be tested in one of the supported test configurations		

Table A.5.6.2.5.1-2: General test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1		One E-UTRAN TDD carrier frequency is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1, 2		One FR1 and one FR2 NR carrier frequency is used.

Active cell		Config 1,2,3,4,5,6	LTE Cell 1 (PCell) and NR cell 2 (PScell)		LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4,5,6	NR cell 3		NR cell 3 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4,5,6	0	13	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4,5,6	39	39	
SMTC-SSB parameters on NR RF Channel 1		Config 1,4	SSB.1 FR1		As specified in clause A.3.10.1
		Config 2,5	SSB.1 FR1		As specified in clause A.3.10.1
		Config 3,6	SSB.2 FR1		As specified in clause A.3.10.1
SMTC-SSB parameters on NR RF Channel 2		Config 1,2,3,4,5,6	SSB.3 FR2		As specified in clause A.3.10.2
CSI-RS for tracking		Config 1,4	TRS.1.1 FDD		
		Config 2,5	TRS.1.1 TDD		
		Config 3,6	TRS.1.2 TDD		
offsetMO	dB	Config 1,2,3,4,5,6	6		
Hysteresis	dB	Config 1,2,3,4,5,6	0		
a4-Threshold	dBm	Config 1,2,3,4,5,6	-105		
CP length		Config 1,2,3,4,5,6	Normal		
TimeToTrigger	s	Config 1,2,3,4,5,6	0		
Filter coefficient		Config 1,2,3,4,5,6	0		L3 filtering is not used
DRX		Config 1,2,3,4,5,6	OFF		DRX is not used
Time offset between PCell and PSCell		Config 1,2,3,4,5,6	3 μs		Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,4	3ms		Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		Config 2,3,5,6	3μs		Synchronous cells.
T1	s	Config 1,2,3,4,5,6	5		
T2	s	Config 1,2,3,4,5,6	5.2 for PC1; 3.5 for other PC	5.2 for PC1; 3.5 for other PC	

Table A.5.6.2.5.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
AoA setup		Config 1,2,3,4,5,6	NA		Setup 1 as specified in clause A.3.15	
Assumption for UE beams[Note 7]		Config 1,2,3,4,5,6	N/A		Rough	
NR RF Channel Number		Config 1,2,3,4,5,6	1		2	

Duplex mode		Config 1,4	FDD	TDD	
		Config 2,3,5,6	TDD	TDD	
$BW_{channel}$	MHz	Config 1,4	10: $N_{RB,c}$ = 52	100: $N_{RB,c}$ = 66	
		Config 2,5	10: $N_{RB,c}$ = 52	100: $N_{RB,c}$ = 66	
		Config 3,6	40: $N_{RB,c}$ = 106	100: $N_{RB,c}$ = 66	
BWP BW	MHz	Config 1,4	10: $N_{RB,c}$ = 52	100: $N_{RB,c}$ = 66	
		Config 2,5	10: $N_{RB,c}$ = 52	100: $N_{RB,c}$ = 66	
		Config 3,6	40: $N_{RB,c}$ = 106	100: $N_{RB,c}$ = 66	
Data RBs allocated		Config 1,4	52	66	
		Config 2,5	52	66	
		Config 3,6	106	66	
TDD configuration		Config 2,5	TDDConf.1.1	TDDConf.3.1	
		Config 3,6	TDDConf.2.1	TDDConf.3.1	
Initial DL BWP		Config 1,2,3,4,5,6	DLBWP.0.1	NA	
Initial UL BWP		Config 1,2,3,4,5,6	ULBWP.0.1	NA	
Dedicated DL BWP		Config 1,2,3,4,5,6	DLBWP.1.1	NA	
Dedicated UL BWP		Config 1,2,3,4,5,6	ULBWP.1.1	NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		Config 1,2,3,4,5,6	OP.1	OP.1	
PDSCH Reference measurement channel		Config 1,4	SR.1.1 FDD	-	
		Config 2,5	SR.1.1 TDD		
		Config 3,6	SR.2.1 TDD		
RMSI CORESET Reference Channel		Config 1,4	CR.1.1 FDD	-	
		Config 2,5	CR.1.1 TDD		
		Config 3,6	CR.2.1 TDD		
Dedicated CORESET Reference Channel		Config 1,4	CCR.1.1 FDD	-	
		Config 2,5	CCR.1.1 TDD		
		Config 3,6	CCR.2.1 TDD		
SMTC configuration defined in A.3.11		Config 1,4	SMTC.2	SMTC.2	
		Config 2,3,5,6	SMTC.1	SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2,4,5	15	120	
		Config 3,6	30	120	
EPRE ratio of PSS to SSS		Config 1,2,3,4,5,6	0	0	
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
$\hat{E}_s$	dBm/SCS	Config 1,2,3,4,5,6		-Infinity	-87

SSB_RP Note 3	dBm/SCS Note5	Config 1,2,3,4,5,6	Link only, see clause A.3.7A	-Infinity	-87
$\hat{E}_s/I_{ot}$ BB Note 8	dB	Config 1,2,3,4,5,6		-Infinity	14.69
Io Note3	dBm/95.04 MHz Note5	Config 1,2,3,4,5,6		-Infinity	-58.01
Propagation Condition		Config 1,2,3,4,5,6		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: SSB_RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Void
Note 5: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 6: As observed with 0dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 8: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.

A.5.6.2.5.2 Test Requirements

In test 1 with per-UE gap and in test 2 with per-FR gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

5120 for UE supporting power class 1, or

3200 for UE supporting other power class.

In test 1 and 2 UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.5.6.2.6 EN-DC event triggered reporting tests for FR2 cell without SSB time index detection when DRX is used

A.5.6.2.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 on NR RF channel 1 and NR cell 3 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.5.6.2.6.1-1, A.5.6.2.6.1-2, and A.5.6.2.6.1-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table A.5.6.2.6.1-2 is provided for a UE that does not support per-FR gap and in test 3&4 measurement gap pattern configuration #13 as defined in Table A.5.6.2.6.1-2 is provided for UE that support per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 3&4. Otherwise it is only required to pass test 1&2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A4 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.1-1. Supported test configurations are shown in table A.5.6.2.6.1-1.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furhtermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.5.6.2.6.1-1: EN-DC event triggered reporting tests without SSB index reading for FR1-FR2

Config	Description of serving cell	Description of target cell
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	
Note: The UE is only required to be tested in one of the supported test configurations		

Table A.5.6.2.6.1-2: General test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

Parameter	Unit	Test configuration	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1				One E-UTRAN TDD carrier frequency is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1, 2				One FR1 and one Fr2 NR carrier frequency is used.
Active cell		Config 1,2,3,4,5,6	LTE Cell 1 (PCell) and NR cell 2 (PScell)				LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4,5,6	NR cell 3				NR cell 3 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4,5,6	0		13		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4,5,6	39		39		
SMTC-SSB parameters on NR RF Channel 1		Config 1,4	SSB.1 FR1				As specified in clause A.3.10.1
		Config 2,5	SSB.1 FR1				As specified in clause A.3.10.1
		Config 3,6	SSB.2 FR1				As specified in clause A.3.10.1
SMTC-SSB parameters on NR RF Channel 2		Config 1,2,3,4,5,6	SSB.3 FR2				As specified in clause A.3.10.2
CSI-RS for tracking		Config 1,4	TRS.1.1 FDD				
		Config 2,5	TRS.1.1 TDD				
		Config 3,6	TRS.1.2 TDD				

offsetMO	dB	Config 1,2,3,4,5,6	6				
Hysteresis	dB	Config 1,2,3,4,5,6	0				
a4-Threshold	dBm	Config 1,2,3,4,5,6	-105				
CP length		Config 1,2,3,4,5,6	Normal				
TimeToTrigger	s	Config 1,2,3,4,5,6	0				
Filter coefficient		Config 1,2,3,4,5,6	0				L3 filtering is not used
DRX		Config 1,2,3,4,5,6	DRX .1	DRX .7	DRX .1	DRX .7	As specified in clause A.3.3
Time offset between PCell and PSCell		Config 1,2,3,4,5,6	3 µs				Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,4	3ms				Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		Config 2,3,5,6	3µs				Synchronous cells.
T1	s	Config 1,2,3,4,5,6	5				
T2	s	Config 1,2,3,4,5,6	8 for PC1; 5 for other PC	82 for PC1; 52 for other PC	8 for PC1; 5 for other PC	82 for PC1; 52 for other PC	

Table A.5.6.2.6.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
AoA setup		Config 1,2,3,4,5,6	NA		Setup 1 as specified in clause A.3.15	
Assumption for UE beams[Note 7]		Config 1,2,3,4,5,6	N/A		Rough	
NR RF Channel Number		Config 1,2,3,4,5,6	1		2	
Duplex mode		Config 1,4	FDD		TDD	
		Config 2,3,5,6	TDD		TDD	
$BW_{channel}$	MHz	Config 1,4	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
		Config 2,5	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
		Config 3,6	40: $N_{RB,c}$ = 106		100: $N_{RB,c}$ = 66	
BWP BW	MHz	Config 1,4	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
		Config 2,5	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
		Config 3,6	40: $N_{RB,c}$ = 106		100: $N_{RB,c}$ = 66	
Data RBs allocated		Config 1,4	52		66	
		Config 2,5	52		66	
		Config 3,6	106		66	
TDD configuration		Config 2,5	TDDConf.1.1		TDDConf.3.1	
		Config 3,6	TDDConf.2.1		TDDConf.3.1	
Initial DL BWP		Config 1,2,3,4,5,6	DLBWP.0.1		NA	

Initial UL BWP		Config 1,2,3,4,5,6	ULBWP.0.1	NA	
Dedicated DL BWP		Config 1,2,3,4,5,6	DLBWP.1.1	NA	
Dedicated UL BWP		Config 1,2,3,4,5,6	ULBWP.1.1	NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		Config 1,2,3,4,5,6	OP.1	OP.1	
PDSCH Reference measurement channel		Config 1,4	SR.1.1 FDD	-	
		Config 2,5	SR.1.1 TDD		
		Config 3,6	SR2.1 TDD		
RMSI CORESET Reference Channel		Config 1,4	CR.1.1 FDD	-	
		Config 2,5	CR.1.1 TDD		
		Config 3,6	CR.2.1 TDD		
Dedicated CORESET Reference Channel		Config 1,4	CCR.1.1 FDD	-	
		Config 2,5	CCR.1.1 TDD		
		Config 3,6	CCR.2.1 TDD		
SMTC configuration defined in A.3.11		Config 1,4	SMTC.2	SMTC.2	
		Config 2,3,5,6	SMTC.1	SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2,4,5	15	120	
		Config 3,6	30	120	
EPRE ratio of PSS to SSS		Config 1,2,3,4,5,6	0	0	
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} Note2	dBm/15 kHz Note5		NA Link only, see clause A.3.7A	-104.7	
N_{oc} Note2	dBm/SCS Note4	Config 1,2,4,5		-95.7	
		Config 3,6		-95.7	
SSB_RP Note 3	dBm/SCS Note5	Config 1,2,4,5		-Infinity	-86.7
		Config 3,6		-Infinity	-86.7
$\hat{E}_s / I_{ot}$	dB	Config 1,2,3,4,5,6		-Infinity	9
$\hat{E}_s / N_{oc}$	dB	Config 1,2,3,4,5,6		-Infinity	9
Io Note3	dBm/9.36MHz	Config 1,2,4,5		-	-
	dBm/38.16MHz	Config 3,6		-	-

	dBm/95.04 MHz Note5	Config 1,2,3,4,5,6		-66.7	-57.2
Propagation Condition		Config 1,2,3,4,5,6		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SSB_RP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.5.6.2.6.2 Test Requirements

In test 1 with per-UE gap and in test 3 with per-FR gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X1 ms from the beginning of time period T2, where X1 is

7680 for UE supporting power class 1, or

4800 for UE supporting other power class.

In test 2 with per-UE gap and in test 4 with per-FR gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X2 ms from the beginning of time period T2, where X2 is

81920 for UE supporting power class 1, or

51200 for UE supporting other power class.

In test 1, 2, 3 and 4 UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.5.6.2.7 EN-DC event triggered reporting tests for FR2 cell with SSB time index detection when DRX is not used

A.5.6.2.7.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 on NR RF channel 1 and NR cell 3 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.5.6.2.7.1-1, A.5.6.2.7.1-2, and A.5.6.2.7.1-3.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.5.6.2.7.1-2 is provided for a UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #13 as defined in Table A.5.6.2.7.1-2 is

provided for UE that support per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 2. Otherwise it is only required to pass test 1.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A4 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.1-1. Supported test configurations are shown in table A.5.6.2.7.1-1.

Table A.5.6.2.7.1-1: EN-DC event triggered reporting tests with SSB index reading for FR1-FR2

Config	Description of serving cell	Description of target cell
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	
Note: The UE is only required to be tested in one of the supported test configurations		

Table A.5.6.2.7.1-2: General test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1		One E-UTRAN TDD carrier frequency is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1, 2		One FR1 and one FR2 NR carrier frequency is used.
Active cell		Config 1,2,3,4,5,6	LTE Cell 1 (PCell) and NR cell 2 (PScell)		LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4,5,6	NR cell 3		NR cell 3 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4,5,6	0	13	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4,5,6	39	39	
SMTC-SSB parameters on NR RF Channel 1		Config 1,4	SSB.1 FR1		As specified in clause A.3.10.1
		Config 2,5	SSB.1 FR1		As specified in clause A.3.10.1
		Config 3,6	SSB.2 FR1		As specified in clause A.3.10.1
SMTC-SSB parameters on NR RF Channel 2		Config 1,2,3,4,5,6	SSB.3 FR2		As specified in clause A.3.10.2
CSI-RS for tracking		Config 1,4	TRS.1.1 FDD		
		Config 2,5	TRS.1.1 TDD		
		Config 3,6	TRS.1.2 TDD		

offsetMO	dB	Config 1,2,3,4,5,6	6		
Hysteresis	dB	Config 1,2,3,4,5,6	0		
a4-Threshold	dBm	Config 1,2,3,4,5,6	-105		
CP length		Config 1,2,3,4,5,6	Normal		
TimeToTrigger	s	Config 1,2,3,4,5,6	0		
Filter coefficient		Config 1,2,3,4,5,6	0		L3 filtering is not used
DRX		Config 1,2,3,4,5,6	OFF		DRX is not used
Time offset between PCell and PSCell		Config 1,2,3,4,5,6	3 μs		Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,4	3ms		Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		Config 2,3,5,6	3μs		Synchronous cells.
T1	s	Config 1,2,3,4,5,6	5		
T2	s	Config 1,2,3,4,5,6	7 for PC1; 4.5 for other PC	7 for PC1; 4.5 for other PC	

Table A.5.6.2.7.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
AoA setup		Config 1,2,3,4,5,6	NA		Setup 1 as specified in clause A.3.15	
Assumption for UE beams[Note 7]		Config 1,2,3,4,5,6	N/A		Rough	
NR RF Channel Number		Config 1,2,3,4,5,6	1		2	
Duplex mode		Config 1,4	FDD		TDD	
		Config 2,3,5,6	TDD		TDD	
$BW_{channel}$	MHz	Config 1,4	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
		Config 2,5	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
		Config 3,6	40: $N_{RB,c}$ = 106		100: $N_{RB,c}$ = 66	
BWP BW	MHz	Config 1,4	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
		Config 2,5	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
		Config 3,6	40: $N_{RB,c}$ = 106		100: $N_{RB,c}$ = 66	
Data RBs allocated		Config 1,4	52		66	
		Config 2,5	52		66	
		Config 3,6	106		66	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		Config 1,2,3,4,5,6	OP.1		OP.1	
PDSCH Reference measurement channel		Config 1,4	SR.1.1 FDD		-	
		Config 2,5	SR.1.1 TDD			
		Config 3,6	SR.2.1 TDD			
RMSI CORESET Reference Channel		Config 1,4	CR.1.1 FDD		-	
		Config 2,5	CR.1.1 TDD			
		Config 3,6	CR.2.1 TDD			

Dedicated CORESET Reference Channel		Config 1,4	CCR.1.1 FDD	-	
		Config 2,5	CCR.1.1 TDD		
		Config 3,6	CCR.2.1 TDD		
TDD configuration		Config 2,5	TDDConf.1.1	TDDConf.3.1	
		Config 3,6	TDDConf.2.1	TDDConf.3.1	
Initial DL BWP		Config 1,2,3,4,5,6	DLBWP.0.1	NA	
Initial UL BWP		Config 1,2,3,4,5,6	ULBWP.0.1	NA	
Dedicated DL BWP		Config 1,2,3,4,5,6	DLBWP.1.1	NA	
Dedicated UL BWP		Config 1,2,3,4,5,6	ULBWP.1.1	NA	
SMTC configuration defined in A.3.11		Config 1,4	SMTC.2	SMTC.2	
		Config 2,3,5,6	SMTC.1	SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2,4,5	15	120	
		Config 3,6	30	120	
EPRE ratio of PSS to SSS		Config 1,2,3,4,5,6	0	0	
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
$\hat{E}_s$	dBm/SCS	Config 1,2,3,4,5,6	Link only, see clause A.3.7A	-Infinity	-87
SSB_RP Note 3	dBm/SCS Note5	Config 1,2,3,4,5,6		-Infinity	-87
$\hat{E}_s / I_{ot\ BB}$ Note 8	dB	Config 1,2,3,4,5,6		-Infinity	14.69
Io Note3	dBm/95.04 MHz Note5	Config 1,2,3,4,5,6		-Infinity	-58.01
Propagation Condition		Config 1,2,3,4,5,6		AWGN	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Void
Note 3:	SS-B_RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Void
Note 5:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 6:	As observed with 0dBi gain antenna at the centre of the quiet zone
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 8:	Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.

A.5.6.2.7.2 Test Requirements

In test 1 with per-UE gap and in test 2 with per-FR gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

6720 for UE supporting power class 1, or

4160 for UE supporting other power class.

In test 1 and 2 UE is required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.5.6.2.8 EN-DC event triggered reporting tests for FR2 cell with SSB time index detection when DRX is used

A.5.6.2.8.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 on NR RF channel 1 and NR cell 3 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.5.6.2.8.1-1, A.5.6.2.8.1-2, and A.5.6.2.8.1-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table A.5.6.2.8.1-2 is provided for a UE that does not support per-FR gap and in test 3&4 measurement gap pattern configuration #13 as defined in Table A.5.6.2.8.1-2 is provided for UE that support per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 3&4. Otherwise it is only required to pass test 1&2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A4 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.1-1. Supported test configurations are shown in table A.5.6.2.8.1-1.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furhtermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.5.6.2.8.1-1: EN-DC event triggered reporting tests without SSB index reading for FR1-FR2

Config	Description of serving cell	Description of target cell
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	
Note: The UE is only required to be tested in one of the supported test configurations		

Table A.5.6.2.8.1-2: General test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

Parameter	Unit	Test configuration	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1				One E-UTRAN TDD carrier frequenciy is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1, 2				One FR1 and one FR2 NR carrier frequency is used.
Active cell		Config 1,2,3,4,5,6	LTE Cell 1 (PCell) and NR cell 2 (PScell)				LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4,5,6	NR cell 3				NR cell 3 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4,5,6	0		13		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4,5,6	39		39		
SMTC-SSB parameters on NR RF Channel 1		Config 1,4	SSB.1 FR1				As specified in clause A.3.10.1
		Config 2,5	SSB.1 FR1				As specified in clause A.3.10.1
		Config 3,6	SSB.2 FR1				As specified in clause A.3.10.1
SMTC-SSB parameters on NR RF Channel 2		Config 1,2,3,4,5,6	SSB.3 FR2				As specified in clause A.3.10.2
CSI-RS for tracking		Config 1,4	TRS.1.1 FDD				
		Config 2,5	TRS.1.1 TDD				
		Config 3,6	TRS.1.2 TDD				
offsetMO	dB	Config 1,2,3,4,5,6	6				
Hysteresis	dB	Config 1,2,3,4,5,6	0				
a4-Threshold	dBm	Config 1,2,3,4,5,6	-105				
CP length		Config 1,2,3,4,5,6	Normal				
TimeToTrigger	s	Config 1,2,3,4,5,6	0				

Filter coefficient		Config 1,2,3,4,5,6	0				L3 filtering is not used
DRX		Config 1,2,3,4,5,6	DRX .1	DRX .7	DRX .1	DRX .7	As specified in clause A.3.3
Time offset between PCell and PSCell		Config 1,2,3,4,5,6	3 µs				Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,4	3ms				Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		Config 2,3,5,6	3µs				Synchronous cells.
T1	s	Config 1,2,3,4,5,6	5				
T2	s	Config 1,2,3,4,5,6	11 for PC1; 6.5 for other PC	108 for PC1; 67 for other PC	11 for PC1; 6.5 for other PC	108 for PC1; 67 for other PC	

Table A.5.6.2.8.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
AoA setup		Config 1,2,3,4,5,6	NA		Setup 1 as specified in clause A.3.15	
Assumption for UE beams[Note 7]		Config 1,2,3,4,5,6	N/A		Rough	
NR RF Channel Number		Config 1,2,3,4,5,6	1		2	
Duplex mode		Config 1,4	FDD		TDD	
		Config 2,3,5,6	TDD		TDD	
$BW_{channel}$	MHz	Config 1,4	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
		Config 2,5	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
		Config 3,6	40: $N_{RB,c}$ = 106		100: $N_{RB,c}$ = 66	
BWP BW	MHz	Config 1,4	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
		Config 2,5	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
		Config 3,6	40: $N_{RB,c}$ = 106		100: $N_{RB,c}$ = 66	
Data RBs allocated		Config 1,4	52		66	
		Config 2,5	52		66	
		Config 3,6	106		66	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		Config 1,2,3,4,5,6	OP.1		OP.1	
PDSCH Reference measurement channel		Config 1,4	SR.1.1 FDD		-	
		Config 2,5	SR.1.1 TDD			
		Config 3,6	SR.2.1 TDD			
RMSI CORESET Reference Channel		Config 1,4	CR.1.1 FDD		-	
		Config 2,5	CR.1.1 TDD			
		Config 3,6	CR.2.1 TDD			
Dedicated CORESET Reference Channel		Config 1,4	CCR.1.1 FDD		-	
		Config 2,5	CCR.1.1 TDD			
		Config 3,6	CCR.2.1 TDD			

TDD configuration		Config 2,5	TDDConf.1.1	TDDConf.3.1	
		Config 3,6	TDDConf.2.1	TDDConf.3.1	
Initial DL BWP		Config 1,2,3,4,5,6	DLBWP.0.1	NA	
Initial UL BWP		Config 1,2,3,4,5,6	ULBWP.0.1	NA	
Dedicated DL BWP		Config 1,2,3,4,5,6	DLBWP.1.1	NA	
Dedicated UL BWP		Config 1,2,3,4,5,6	ULBWP.1.1	NA	
SMTC configuration defined in A.3.11		Config 1,4	SMTC.2	SMTC.2	
		Config 2,3,5,6	SMTC.1	SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2,4,5	15	120	
		Config 3,6	30	120	
EPRE ratio of PSS to SSS		Config 1,2,3,4,5,6	0	0	
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} Note2	dBm/15 kHz Note5		NA Link only, see clause A.3.7A	-104.7	
N_{oc} Note2	dBm/SCS Note4	Config 1,2,4,5		-95.7	
		Config 3,6		-95.7	
SSB_RP Note 3	dBm/SCS Note5	Config 1,2,4,5		-Infinity	-86.7
		Config 3,6		-Infinity	-86.7
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4,5,6		-Infinity	9
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3,4,5,6		-Infinity	9
Io Note3	dBm/9.36MHz	Config 1,2,4,5		-	-
	dBm/38.16MHz	Config 3,6		-	-

	dBm/95.04 MHz Note5	Config 1,2,3,4,5,6		-66.7	-57.2
Propagation Condition		Config 1,2,3,4,5,6		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SSB_RP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 6: As observed with 0dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.5.6.2.8.2 Test Requirements

In test 1 with per-UE gap and in test 3 with per-FR gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X1 ms from the beginning of time period T2, where X1 is

10080 for UE supporting power class 1, or

6240 for UE supporting other power class.

In test 2 with per-UE gap and in test 4 with per-FR gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X2 ms from the beginning of time period T2, where X2 is

107520 for UE supporting power class 1, or

66560 for UE supporting other power class.

In test 1, 2, 3 and 4 UE is required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.5.6.3 L1-RSRP measurement for beam reporting

A.5.6.3.1 SSB based L1-RSRP measurement when DRX is not used

A.5.6.3.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.1, with the testing configurations for NR cells in Table A.5.6.3.1.1-1.

The AoA setup for this test is Setup 1 as defined in clause A.3.15

Table A.5.6.3.1.1-1: Applicable NR configurations for FR2 SSB based L1-RSRP test

Config	Description

1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.5.6.3.1.2 Test parameters

There are two cells in the test, E-UTRAN PCell (Cell 1) and FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.5.6.3.1.2-1 and Table A.5.6.3.1.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.5.6.3.1.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~4		freq1
Duplex mode	1~4		TDD
TDD Configuration	1~4		TDDConf.3.1
$BW_{channel}$	1~4	MHz	100: $N_{RB,c}$ = 66
Data RBs allocated	1~4		66
PDSCH Reference measurement channel	1,2		SR.3.2 TDD
	3,4		SR.3.3 TDD
RMSI CORESET Reference Channel	1,2		CR.3.1 TDD
	3,4		CR.3.2 TDD
Dedicated CORESET Reference Channel	1,2		CCR.3.1 TDD
	3,4		CCR.3.7 TDD
SSB configuration	1,2		SSB.1 FR2
	3,4		SSB.2 FR2
OCNG Patterns	1~4		OP.1
Initial BWP Configuration	1~4		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~4		DLBWP.1.3 ULBWP.1.3
SMTC configuration	1~4		SMTC.1
TRS Configuration	1~4		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~4		TCI.State.2
DRX configuration	1~4		Off
reportConfigType	1~4		periodic
reportQuantity	1~4		ssb-Index-RSRP
Number of reported RS	1~4		2
L1-RSRP reporting period	1~4	slot	320
T1	1~4	s	5
T2	1~4	s	2
EPRE ratio of PSS to SSS	1~4	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			

EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~4		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.5.6.3.1.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
Angle of arrival configuration			Setup 1 according to A.3.15.1			
Assumption for UE beams Note 4	1~4		Rough			
N_{oc} Note2	1~4	dBm/15kHz	-105			
N_{oc} Note2	1,2	dBm/SSB SCS	-96			
	3,4		-93			
$\hat{E}_s / I_{ot}$	1~4	dB	0	0	-Infinity	9
SSB_RP Note3	1,2	dBm/SSB SCS	-96	-96	-Infinity	-87
	3,4		-93	-93	-Infinity	-84
Io Note3	1,2	dBm/95.04MHz	-63.97	-63.97	-66.98	-57.47
	3,4		-63.97	-63.97	-66.98	-57.47
$\hat{E}_s / N_{oc}$	1~4	dB	0	0	-Infinity	9
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						

A.5.6.3.1.3 Test Requirements

The UE shall send L1-RSRP report every 320 slots. No later than X ms plus 320 slots from the beginning of time period T2, UE shall send L1-RSRP report including the results for both SSB#0 and SSB#1 while meeting the accuracy requirements defined in clause 10.1.20.1, where X is

- 1680 for UE supporting power class 1

- 1200 for UE supporting power class 2,3 or 4.

The reported L1-RSRP value shall include the Rx antenna gain in the range of -10 to +20 dB.

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.6.3.2 SSB based L1-RSRP measurement when DRX is used

A.5.6.3.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.1, with the testing configurations for NR cells in Table A.5.6.3.2.1-1.

The AoA setup for this test is Setup 1 as defined in clause A.3.15

Table A.5.6.3.2.1-1: Applicable NR configurations for FR2 SSB based L1-RSRP test

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.5.6.3.2.2 Test parameters

There are two cells in the test, E-UTRAN PCell (Cell 1) and FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.5.6.3.2.2-1 and Table A.5.6.3.2.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.5.6.3.2.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~4		freq1
Duplex mode	1~4		TDD
TDD Configuration	1~4		TDDConf.3.1
$BW_{channel}$	1~4	MHz	100: $N_{RB,c}$ = 66
Data RBs allocated	1~4		66
PDSCH Reference measurement channel	1,2		SR.3.2 TDD
	3,4		SR.3.3 TDD
RMSI CORESET Reference Channel	1,2		CR.3.1 TDD
	3,4		CR.3.2 TDD
Dedicated CORESET Reference Channel	1,2		CCR.3.1 TDD
	3,4		CCR.3.7 TDD
SSB configuration	1,2		SSB.1 FR2
	3,4		SSB.2 FR2
OCNG Patterns	1~4		OP.1
Initial BWP Configuration	1~4		DLBWP.0.1 ULBWP.0.1

Dedicated BWP configuration	1~4		DLBWP.1.3 ULBWP.1.3
SMTC configuration	1~4		SMTC.1
TRS Configuration	1~4		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~4		TCI.State.2
DRX configuration	1~4		DRX.3
reportConfigType	1~4		periodic
reportQuantity	1~4		ssb-Index-RSRP
Number of reported RS	1~4		2
L1-RSRP reporting period	1~4	slot	320
T1	1~4	s	5
T2	1~4	s	3
EPRE ratio of PSS to SSS	1~4	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~4		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.5.6.3.2.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
Angle of arrival configuration			Setup 1 according to A.3.15.1			
Assumption for UE beams Note 4	1~4		Rough			
N_{oc} Note2	1~4	dBm/15kHz	-105			
N_{oc} Note2	1,2	dBm/SSB SCS	-96			
	3,4		-93			
$\hat{E}_s / I_{ot}$	1~4	dB	0	0	-Infinity	9
SSB_RP Note3	1,2	dBm/SSB SCS	-96	-96	-Infinity	-87
	3,4		-93	-93	-Infinity	-84
Io Note3	1,2	dBm/95.04MHz	-63.97	-63.97	-66.98	-57.47
	3,4		-63.97	-63.97	-66.98	-57.47
$\hat{E}_s / N_{oc}$	1~4	dB	0	0	-Infinity	9
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						

Note 3:	SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.

A.5.6.3.2.3 Test Requirements

The UE shall send L1-RSRP report every 320 slots. No later than X ms plus 320 slots from the beginning of time period T2, UE shall send L1-RSRP report including the results for both SSB#0 and SSB#1 while meeting the accuracy requirements defined in clause 10.1.20.1, where X is

- 2880 for UE supporting power class 1
- 1920 for UE supporting power class 2,3 or 4.

The reported L1-RSRP value shall include the Rx antenna gain in the range of -10 to +20 dB.

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.6.3.3 CSI-RS based L1-RSRP measurement when DRX is not used

A.5.6.3.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.2, with the testing configurations for NR cells in Table A.5.6.3.3.1-1.

Table A.5.6.3.3.1-1: Applicable NR configurations for FR2 CSI-RS based L1-RSRP test

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.5.6.3.3.2 Test parameters

There are two cells in the test, E-UTRAN PCell (Cell 1) and FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.5.6.3.3.2-1 and Table A.5.6.3.3.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the CSI-RS and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-RSRP on aperiodic CSI-RS resources. UE is also configured to measure L1-RSRP based on SSB. After 480ms from the beginning of the test, the DCI trigger comes in slot 1 of a frame and UE provides the report back based on the reporting configuration as defined in Table A.5.6.3.3.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs.

Table A.5.6.3.3.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~2		freq1
Duplex mode	1~2		TDD
TDD Configuration	1~2		TDDConf.3.1
$BW_{channel}$	1~2	MHz	100: $N_{RB,c}$ = 66
Data RBs allocated	1~2		66

PDSCH Reference measurement channel	1~2		SR.3.3 TDD
RMSI CORESET Reference Channel	1~2		CR.3.2 TDD
Dedicated CORESET Reference Channel	1~2		CCR.3.7 TDD
SSB configuration	1~2		SSB.1 FR2
CSI-RS configuration	1~2		CSI-RS.3.3 TDD
OCNG Patterns	1~2		OP.1
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~2		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~2		SMTC.1
TRS Configuration	1~2		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~2		TCI.State.2
DRX configuration	1~2		Off
reportConfigType	1~2		aperiodic
reportQuantity	1~2		cri-RSRP
Number of reported RS	1~2		2
qcl-Info	1~2		SSB#0 for resource#0 SSB#1 for resource#1
reportSlotOffsetList	1~2		8
Propagation condition	1~2		AWGN
T1	1~2	s	5
EPRE ratio of PSS to SSS	1~2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.5.6.3.3.2-1: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
Angle of arrival configuration	1~2		Setup 1 according to A.3.15.1	
Assumption for UE beams Note 4	1~2		Rough	
N_{oc} Note1	1~2	dBm/15kHz	-105	
N_{oc} Note1	1~2	dBm/SSB SCS	-95.97	
$\hat{E}_s / I_{ot}$	1~2	dB	0	9

CSI-RS RSRP Note2	1~2	dBm/SSB SCS	-95.97	-86.97
Io Note2	1~2	dBm/95.04MHz	-63.97	-57.47
$\hat{E}_s / N_{oc}$	1~2	dB	0	9
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.5.6.3.3.3 Test Requirements

After 480ms from the beginning of the test, the UE shall send L1-RSRP report at slot 8 from the reception of DCI triggering the L1-RSRP measurement. The L1-RSRP report shall include the results for both CSI-RS#0 and CSI-RS#1 while meeting the accuracy requirements defined in clause 10.1.20.1. The reported L1-RSRP value shall include the Rx antenna gain in the range of -10 to +20 dB.

For absolute accuracy of CSI-RS0 and absolute accuracy of CSI-RS1, the UE is deemed to meet the requirement if the reported L1-RSRP is in the range shown in Table A.5.6.3.3.3-1.

For relative accuracy of CSI-RS0 compared with CSI-RS1, the UE is deemed to meet the requirement if the difference in reported L1-RSRP meets the requirements in Table 10.1.20.2.2-1.

Table A.5.6.3.3.3-1: L1-RSRP absolute accuracy test requirement

	Test requirement Notes1,2,3
CSI-RS0	CSI-RS _RP0 -δ + G_{min} ≤ Reported RSRP(dBm) ≤CSI-RS _RP0 +δ + G_{max}
CSI-RS1	CSI-RS _RP1 -δ + G_{min} ≤ Reported RSRP(dBm) ≤CSI-RS _RP1 +δ + G_{max}
Note 1: CSI-RS_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the CSI-RS n under consideration	
Note 2: δ is the RSRP absolute accuracy requirement from Table 10.1.20.2.1-1, selected according to the Io used in the test	
Note 3: G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class	

A.5.6.3.4 CSI-RS based L1-RSRP measurement when DRX is used

A.5.6.3.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.2, with the testing configurations for NR cells in Table A.5.6.3.4.1-1.

Table A.5.6.3.4.1-1: Applicable NR configurations for FR2 CSI-RS based L1-RSRP test

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.5.6.3.4.2 Test parameters

There are two cells in the test, E-UTRAN PCell (Cell 1) and FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.5.6.3.4.2-1 and Table A.5.6.3.4.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the CSI-RS and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-RSRP on aperiodic CSI-RS resources. UE is also configured to measure L1-RSRP based on SSB. After 1440ms from the beginning of the test, the DCI trigger comes in slot 1 of a frame and UE provides the report back based on the reporting configuration as defined in Table A.5.6.3.4.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs.

Table A.5.6.3.4.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~2		freq1
Duplex mode	1~2		TDD
TDD Configuration	1~2		TDDConf.3.1
$BW_{channel}$	1~2	MHz	100: $N_{RB,c}$ = 66
Data RBs allocated	1~2		66
PDSCH Reference measurement channel	1~2		SR.3.3 TDD
RMSI CORESET Reference Channel	1~2		CR.3.2 TDD
Dedicated CORESET Reference Channel	1~2		CCR.3.7 TDD
SSB configuration	1~2		SSB.1 FR2
CSI-RS configuration	1~2		CSI-RS.3.3 TDD
OCNG Patterns	1~2		OP.1
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~2		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~2		SMTC.1
TRS Configuration	1~2		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~2		TCI.State.2
DRX configuration	1~2		DRX.3
reportConfigType	1~2		aperiodic
reportQuantity	1~2		cri-RSRP
Number of reported RS	1~2		2
qcl-Info	1~2		SSB#0 for resource#0 SSB#1 for resource#1
reportSlotOffsetList	1~2		8
Propagation condition	1~2		AWGN
T1	1~2	s	5
EPRE ratio of PSS to SSS	1~2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			

EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.5.6.3.4.2-1: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
Angle of arrival configuration	1~2		Setup 1 according to A.3.15.1	
Assumption for UE beams Note 4	1~2		Rough	
N_{oc} Note1	1~2	dBm/15kHz	-105	
N_{oc} Note1	1~2	dBm/SSB SCS	-95.97	
$\hat{E}_s / I_{ot}$	1~2	dB	0	9
CSI-RS RSRP Note2	1~2	dBm/SSB SCS	-95.97	-86.97
Io Note2	1~2	dBm/95.04MHz	-63.97	-57.47
$\hat{E}_s / N_{oc}$	1~2	dB	0	9
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.5.6.3.4.3 Test Requirements

After 1440ms from the beginning of the test, the UE shall send L1-RSRP report at slot 8 from the reception of DCI triggering the L1-RSRP measurement. The L1-RSRP report shall include the results for both CSI-RS#0 and CSI-RS#1 while meeting the accuracy requirements defined in clause 10.1.20.1. The reported L1-RSRP value shall include the Rx antenna gain in the range of [-10 ~ +20] dB.

For absolute accuracy of CSI-RS0 and absolute accuracy of CSI-RS1, the UE is deemed to meet the requirement if the reported L1-RSRP is in the range shown in Table A.5.6.3.4.3-1.

For relative accuracy of CSI-RS0 compared with CSI-RS1, the UE is deemed to meet the requirement if the difference in reported L1-RSRP meets the requirements in Table 10.1.20.2.2-1.

Table A.5.6.3.4.3-1: L1-RSRP absolute accuracy test requirement

	Test requirement Notes1,2,3
CSI-RS0	CSI-RS _RP0 -δ + G_{min} ≤ Reported RSRP(dBm) ≤CSI-RS _RP0 +δ + G_{max}
CSI-RS1	CSI-RS _RP1 -δ + G_{min} ≤ Reported RSRP(dBm) ≤CSI-RS _RP1 +δ + G_{max}
Note 1: CSI-RS_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the CSI-RS n under consideration	
Note 2: δ is the RSRP absolute accuracy requirement from Table 10.1.20.2.1-1, selected according to the Io used in the test	

Note 3:	G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class

A.5.6.4 CLI measurements

A.5.6.4.1 SRS-RSRP measurement with DRX

A.5.6.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of SRS-RSRP measurement. This test will verify the SRS-RSRP measurement requirements in clause 9.7.2.5 with the testing configurations for NR cells in Table A.5.6.4.1.1-1.

Table A.5.6.4.1.1-1: Applicable NR configurations for FR2 SRS-RSRP test

Configuration	Description
1	NR 120 kHz SRS SCS, 100 MHz bandwidth, TDD duplex mode

A.5.6.4.1.2 Test Parameters

Two cells are deployed in the test, which are E-UTRAN PCell (Cell 1) and FR2 PSCell (Cell 2). The test parameters for PSCell is given in Table A.5.6.4.1.2-1 ~ A.5.6.4.1.2-3 below and applicability for the E-UTRAN cell are defined in A.3.7.2. In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event I1 is used. The test consists of two successive time periods, with time duration of T1 and T2, respectively.

During the test, the test system transmits SRS resource for measurement in the DL slot according to the SRS configuration in Table A.5.6.4.1.2-4 and the test parameters for the (virtual) neighbour cell UE in Table A.5.6.4.1.2-3. During the test, the test system does not transmit PDCCH/PDSCH/OCNG on SRS symbol to be transmitted and on 2 data symbols before SRS to be transmitted.

Table A.5.6.4.1.2-1: General test parameters for SRS-RSRP event triggered reporting for PSCell in FR2

Parameter	Unit	Test configuration	Value	Comment
Active cell		1	E-UTRAN Cell 1 and NR Cell 2	
RF Channel Number		1	1: Cell 1 2: Cell 2	
SSB configuration		1	SSB.1 FR2	
SMTC configuration		1	SMTC.1	
SRS configuration		1	SRSConf.1	Table A.5.6.4.1.2-4
CP length		1	Normal	
i1-Threshold	dBm	1	-103	
Hysteresis	dB	1	0	
Time To Trigger	s	1	0	
Filter coefficient		1	0	L3 filtering is not used
DRX	ms	1	DRX.11	
Time offset between DL from serving cell and SRS from test system	µs	1,2	10.67	
T1	s	1	5	
T2	s	1	1	

Table A.5.6.4.1.2-2: NR Cell specific test parameters for SRS-RSRP event triggered reporting for PSCell in FR2

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
TDD configuration		1	TDDConf.3.1	
PDSCH RMC configuration		1	SR.3.1 TDD	
RMSI CORESET RMC configuration		1	CR.3.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD	
OCNG Patterns		1	OP.1	
TRS configuration			TRS.2.1. TDD	
PDSCH/PDCCH TCI state		1	TCI.State.2	
Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1	DLBWP.1.1	
Active UL BWP configuration		1	ULBWP.1.1	
Propagation Condition		1	AWGN	

Table A.5.6.4.1.2-3: NR OTA Cell specific test parameters for SRS-RSRP event triggered reporting for PSCell and Neighbour cell UE in FR2

Parameter	Unit	Test configuration	Cell 2		Neighbour cell UE	
			T1	T2	T1	T2
AoA setup		1	Setup 1 defined A.3.15.1			
Beam assumption Note 4		1	Fine			
N_{oc} Note 2	dBm/15 kHz	1	-98		-98	
N_{oc} Note 2	dBm/SCS	1	-89		-89	
$\hat{E}_s/I_{ot}$	dB	1	-	-	-infinity	4
$\hat{E}_s/N_{oc}$	dB	1	4	4	-infinity	4
SRS-RSRP Note 3	dBm/SCS kHz	1	-	-	-infinity	-94
Io	dBm/95.04 MHz	1	-61.36	-55.91	-70.01	-68.82

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SRS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Note 5 : Cell 2 doesn't transmit during the SRS and the 2 previous symbols. Es/NoC is not applied to those symbols.

Table A.5.6.4.1.2-4: SRS configuration for measurement reporting

	Field	SRSConf.1	Comments
SRS-ResourceSet	srs-ResourceSetId	0	
	srs-ResourceIdList	0	
	resourceType	Periodic	
	Usage	Codebook	
SRS-Resource	SRS-ResourceId	0	
	nrofSRS-Ports	Port1	
	transmissionComb	n2	
	combOffset-n2	0	
	cyclicShift-n2	0	
	resourceMapping startPosition	0	
	resourceMapping nrofSymbols	n1	
	resourceMapping repetitionFactor	n1	
	freqDomainPosition	0	
	freqDomainShift	0	
	freqHopping c-SRS	12	
	freqHopping b-SRS	0	
	freqHopping b-hop	0	
	groupOrSequenceHopping	Neither	
	resourceType	Periodic	
	periodicityAndOffset	sl160, 25	
	sequenceId	0	Any 10 bit number

A.5.6.4.1.3 Test Requirements

The UE shall send one Event I1 triggered measurement report, with a measurement reporting delay less than 60 ms from the beginning of time period T2.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.5.6.4.2 CLI-RSSI measurement with DRX

A.5.6.4.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of CLI-RSSI measurement. This test will verify the CLI-RSSI measurement requirements in clause 9.7.3.5 with the testing configurations for NR cells in Table A.5.6.4.2.1-1.

Table A.5.6.4.2.1-1: Applicable NR configurations for FR2 CLI-RSSI test

Configuration	Description
1	NR 120 kHz SCS, 100 MHz bandwidth, TDD duplex mode

A.5.6.4.2.2 Test Parameters

Two cells are deployed in the test, which are E-UTRAN PCell (Cell 1) and FR2 PSCell (Cell 2). The test parameters for PSCell is given in Table A.5.6.4.2.2-1 ~ A.5.6.4.2.2-3 below and applicability for the E-UTRAN cell are defined in A.3.7.2. In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event I1 is used. The test consists of two successive time periods, with time duration of T1 and T2, respectively.

During the test, the test system does not transmit PDCCH/PDSCH/OCNG on symbols for CLI-RSSI measurement resource and on 2 data symbols before. The CLI-RSSI measurement resource configuration is in Table A.5.6.4.2.2-4.

Table A.5.6.4.2.2-1: General test parameters for CLI-RSSI event triggered reporting for PSCell in FR2

Parameter	Unit	Test configuration	Value	Comment
Active cell		1	E-UTRAN Cell 1 and NR Cell 2	
RF Channel Number		1	1: Cell 1 2: Cell 2	
SSB configuration		1	SSB.1 FR2	
SMTC configuration		1	SMTC.1	
CLI-RSSI configuration		1	CLI-RSSIConf.1	Table A.5.6.4.2.2-4
CP length		1	Normal	
i1-Threshold	dBm	1	-94.5	
Hysteresis	dB	1	0	
Time To Trigger	s	1	0	
Filter coefficient		1	0	L3 filtering is not used
DRX		1	DRX.11	
Time offset between DL from serving cell and OCNG from test system	µs	1	10.67	
T1	s	1	5	
T2	s	1	1	

Table A.5.6.4.2.2-2: NR Cell specific test parameters for CLI-RSSI event triggered reporting for PSCell in FR2

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
TDD configuration		1	TDDConf.3.1	
PDSCH RMC configuration		1	SR.3.1 TDD	
PUSCH parameters		1	N/A	
RMSI CORESET RMC configuration		1	CR.3.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD	
OCNG Patterns Note 1		1	OP.1	
TRS configuration			TRS.2.1. TDD	
PDSCH/PDCCH TCI state		1	TCI.State.2	
Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1	DLBWP.1.1	
Active UL BWP configuration		1	ULBWP.1.1	
Propagation Condition		1	AWGN	
Note 1: OCNG is not transmitted in the CLI-RSSI measurement resources.				

Table A.5.6.4.2.2-3: NR OTA Cell specific test parameters for CLI-RSSI event triggered reporting for PSCell in FR2

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
AoA setup		1	Setup 1 defined in A.3.15.1	
Beam assumption Note 3		1	Fine	
N_{oc} on CLI-RSSI measurement resource Note 2	dBm/15 kHz	1	-119	-108
N_{oc} on CLI-RSSI measurement resource Note 2	dBm/SCS	1	-110	-99
Io on CLI-RSSI measurement resource	dBm/95.04 MHz	1	-81.01	-70.01
Io on CLI-RSSI measurement resource	dBm/1.08 MHz	1	-100.46	-89.46

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.

Table A.5.6.4.2.2-4: CLI-RSSI measurement resource configuration for measurement reporting

	Field	CLI-RSSIConf.1
RSSI-Resource	rssi-ResourceId	0
	rssi-SCS	120
	startPRB	0
	nrofPRBs	66
	startPosition	3
	nrofSymbols	11
	rssi-PeriodicityAndOffset	sl160, 25

A.5.6.4.2.3 Test Requirements

The UE shall send one Event I1 triggered measurement report, with a measurement reporting delay less than 20 ms from the beginning of time period T2. The nominal RSSI used to evaluate the requirement shall be based on Io.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.5.6.5 Measurements with autonomous gaps

A.5.6.5.1 EN-DC inter-frequency CGI identification of NR neighbor cell in FR2

A.5.6.5.1.1 Test Purpose and Environment

This test is to verify the requirement for identification of a new CGI of NR cell with autonomous gaps in clause 9.11.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR2 on NR RF channel 1 and NR cell 3 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.5.6.5.1.1-1, A.5.6.5.1.1-2, and A.5.6.5.1.1-3.

The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE does not have any timing information of cell 3 Starting T2, cell 3 becomes detectable and the UE is expected to detect and send a measurement report with SSB index. In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. Gap pattern configuration with id #0 is configured before T2 begins to enable inter-frequency monitoring.

A RRC message implying SI reading with autonomous gap shall be sent to the UE during period T2, within 3s after the UE has reported Event A3. The RRC message shall create a measurement report configuration with *reportCGI* and *useAutonomousGaps-r16* setup. The start of T3 is the instant when the last TTI containing the RRC message implying SI reading is sent to the UE. Measurement gaps shall be deconfigured before the start of T3.

PDCCHs indicating new transmissions shall be sent continuously to ensure that the UE would have ACK/NACK sending during identifying a new CGI of NR cell.

The configuration of LTE cell 1 is defined in table A.3.7.2.2-1. Supported test configurations are shown in table A.5.6.5.1.1-1.

Table A.5.6.5.1.1-1 Supported test configurations for EN-DC inter-frequency CGI identification of NR neighbor cell in FR2

Config	Description
1	LTE FDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.5.6.5.1.1-2: General test parameters for EN-DC inter-frequency CGI identification of NR neighbor cell in FR2

Parameter	Unit	Test configuration	Value	Comment
E-UTRA RF Channel Number		Config 1,2	1	One E-UTRAN TDD carrier frequencies is used.
NR RF Channel Number		Config 1,2	1, 2	Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2	LTE Cell 1 (PCell) and NR cell 2 (PScell)	LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.
Neighbour cell		Config 1,2	NR cell 3	NR cell 3 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2	0	As specified in clause 9.1.2-1.

Measurement gap offset		Config 1,2	39	
SMTC-SSB parameters		Config 1,2	SSB.3 FR2	As specified in clause A.3.10.2
A3-Offset	dB	Config 1,2	[-30]	
Hysteresis	dB	Config 1,2	0	
CP length		Config 1,2	Normal	
TimeToTrigger	s	Config 1,2	0	
Filter coefficient		Config 1,2	0	L3 filtering is not used
DRX		Config 1,2	OFF	DRX is not used
Time offset between PCell and PSCell		Config 1,2	3 μs	Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,2	3μs	Synchronous cells.
T1	s	Config 1,2	5	
T2	s	Config 1,2	7 for PC1; 4.5 for other PC	
T3	s	Config 1,2	5	

Table A.5.6.5.1.1-3: Cell specific test parameters for EN-DC inter-frequency CGI identification of NR neighbor cell in FR2

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2, T3	T1	T2, T3
NR RF Channel Number		Config 1,2	1		2	
Duplex mode		Config 1,2	TDD		TDD	
$BW_{channel}$	MHz	Config 1,2	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP BW	MHz	Config 1,2	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
TDD configuration		Config 1,2	TDDConf.3.1		TDDConf.3.1	
Initial DL BWP		Config 1,2	DLBWP.0.1		NA	
Initial UL BWP		Config 1,2	DLBWP.0.1			
Dedicated DL BWP		Config 1,2	DLBWP.1.1		NA	
Dedicated UL BWP		Config 1,2	ULBWP.1.1		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		Config 1,2	OP.1		OP.1	
PDSCH Reference measurement channel		Config 1,2	SR.3.1 TDD		-	
CORESET Reference Channel		Config 1,2	CR.3.1 TDD		-	
RMSI scheduling periodicity	ms	Config 1,2	NA		40	
TRS configuration		Config 1,2	TRS.2.1 TDD		NA	
TCI configuration		Config 1,2	CSI-RS.Config.0		NA	
SMTC configuration defined in A.3.11		Config 1,2	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2	120		120	

EPRE ratio of PSS to SSS		Config 1,2	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
Propagation Condition		Config 1,2	AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				

Table A.5.6.5.1.1-4: OTA cell specific test parameters for EN-DC inter-frequency CGI identification of NR neighbor cell in FR2

Parameter	Unit	Config	Cell 2		Cell 3	
			T1	T2, T3	T1	T2, T3
AoA setup		Config 1,2	Setup 1 defined in A.3.15.1			
Assumption for UE beams[Note 4]		Config 1,2	Rough		Rough	
$\hat{E}_s/I_{ot}$	dB	Config 1,2	4	4	-Infinity	-3
N_{oc} [Note 2]	dBm/15 KHz	Config 1,2	-102			
N_{oc} [Note 2]	dBm/SCS	1, 2	-93			
SS-RSRP	dBm/SCS	1, 2	-89	-89	-Infinity	-96
$\hat{E}_s/N_{oc}$	dB	1~4	4	4	-Infinity	-3
Io	dBm/95.04MHz	1~4	-58.56		-62.25	
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.						
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone						

A.5.6.5.1.2 Test Requirements

The UE shall transmit a measurement report containing the cell global identifier of cell 3 within 775 milliseconds from the start of T3.

Test requirement = RRC Procedure delay + $T_{identify_CGI}$ + processing time for FR2 + reporting delay

= 10 + (25*20 + 6*40) + 20 + 2ms from the start of T3

= 772 ms, allow 775 ms.

The UE shall be scheduled continuously throughout the test, and from the start of T3 until 775 ms the number of interrupted slots shall not exceed the allowed number as defined in clause 8.2.1.2.16.

The maximum number of interrupted slots allowed is 6*48 + 12*49 = 876.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.5.6.6 L1-SINR measurement for beam reporting

A.5.6.6.1 L1-SINR measurement with CSI-RS based CMR and no dedicated IMR configured when DRX is used

A.5.6.6.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-SINR measurement. This test will partly verify the L1-SINR measurement requirements in clause 9.8.4.1, with the testing configurations for NR cells in Table A.5.6.6.1.1-1.

Table A.5.6.6.1.1-1: Applicable NR configurations for FR2 CSI-RS based L1-SINR test

Config	Description
1	LTE FDD, NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.5.6.6.1.2 Test parameters

There are two cells in the test, E-UTRAN PCell (Cell 1) and FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.5.6.6.1.2-1 and Table A.5.6.6.1.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-SINR measurement on the CSI-RS and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-SINR on aperiodic CSI-RS resources. After 480ms from the beginning of the test, the DCI trigger comes in slot 8 of a frame and UE provides the report back based on the reporting configuration as defined in Table A.5.6.6.1.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs.

Table A.5.6.6.1.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~2		freq1
Duplex mode	1~2		TDD
TDD Configuration	1~2		TDDConf.3.1
$BW_{channel}$	1~2	MHz	100: $N_{RB,c}$ = 66
PDSCH Reference measurement channel	1~2		SR.3.1 TDD

RMSI CORESET Reference Channel	1~2		CR.3.1 TDD
Dedicated CORESET Reference Channel	1~2		CCR.3.1 TDD
SSB configuration	1~2		SSB.1 FR2
CSI-RS configuration	1~2		CSI-RS.3.3 TDD
OCNG Patterns	1~2		OP.1
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~2		DLBWP.1.3 ULBWP.1.3
SMTC configuration	1~2		SMTC.1
TRS Configuration	1~2		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~2		TCI.State.2
DRX configuration	1~2		DRX.3
reportConfigType	1~2		aperiodic
reportQuantity-r16	1~2		cri-SINR-r16
Number of reported RS	1~2		2
qcl-Info	1~2		SSB#0 for resource#0 SSB#1 for resource#1
reportSlotOffsetList	1~2		26
Propagation condition	1~2		AWGN
T1	1~2	s	5
EPRE ratio of PSS to SSS	1~2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.5.6.6.1.2-1: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
Angle of arrival configuration	1~2		Setup 1 according to A.3.15.1	
Beam assumption Note 3	1~2		Rough	
N_{oc} Note1	1~2	dBm/15kHz	-105	
N_{oc} Note1	1~2	dBm/SSB SCS	-95.97	
$\hat{E}_s / I_{ot}$	1~2	dB	0	9
CSI-RS RSRP Note2	1~2	dBm/SSB SCS	-95.97	-86.97
Io Note2	1~2	dBm/95.04MHz	-63.97	-57.47
$\hat{E}_s / N_{oc}$	1~2	dB		

			0	9
Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 2:	CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 3:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation			

A.5.6.6.1.3 Test Requirements

After 480ms from the beginning of the test, the UE shall send L1-SINR report at slot 26 from the reception of DCI triggering the L1-SINR measurement. The L1-SINR report shall include the results for both CSI-RS#0 and CSI-RS#1 while meeting the accuracy requirements defined in clause 10.1.28.1.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.5.6.6.2 L1-SINR measurement with SSB based CMR and dedicated IMR when DRX is not used

A.5.6.6.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-SINR measurement. This test will partly verify the L1-SINR measurement requirements in clause 9.8.4.2, with the testing configurations for NR cells in Table A.5.6.6.2.1-1.

The AoA setup for this test is Setup 1 as defined in clause A.3.15

Table A.5.6.6.2.1-1: Applicable NR configurations for FR2 L1-SINR measurement test with SSB based CMR and CSI-RS based IMR

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.5.6.6.2.2 Test parameters

There are two cells in the test, E-UTRAN PCell (Cell 1) and FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.5.6.6.2.2-1 and Table A.5.6.6.2.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-SINR measurement on the SSBs and the associated CSI-RS resources, and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD measurements based on the SSBs, and UE is configured to perform L1-SINR measurement based on the SSBs as CMR and the CSI-RS resources as IMR.

Table A.5.6.6.2.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~4		freq1
Duplex mode	1~4		TDD
TDD Configuration	1~4		TDDConf.3.1
$BW_{channel}$	1~4	MHz	100: $N_{RB,c}$ = 66
PDSCH Reference measurement channel	1~4		SR.3.1 TDD
RMSI CORESET Reference Channel	1~4		CR.3.1 TDD
Dedicated CORESET Reference Channel	1~4		CCR.3.1 TDD
SSB configuration	1,2		SSB.1 FR2
	3,4		SSB.2 FR2
CSI-RS configuration	1~4		CSI-RS.3.1A TDD
OCNG Patterns	1~4		OP.1
Initial BWP Configuration	1~4		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~4		DLBWP.1.3 ULBWP.1.3
SMTC configuration	1~4		SMTC.1
TRS Configuration	1~4		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~4		TCI.State.2
DRX configuration	1~4		off
reportConfigType	1~4		periodic
reportQuantity-r16	1~4		ssb-Index-SINR-r16
Number of reported RS	1~4		2
L1-SINR reporting period	1~4	slot	640
T1	1~4	s	5
T2	1~4	s	3
EPRE ratio of PSS to SSS	1~4	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~4		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.5.6.6.2.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0	SSB#1

			T1	T2	T1	T2
Angle of arrival configuration			Setup 1 according to A.3.15.1			
Beam assumption Note 4			Rough			
N_{oc} Note2	1~4	dBm/15kHz	-105			
N_{oc} Note2	1,2	dBm/SSB SCS	-96			
	3,4		-93			
$\hat{E}_s / I_{ot}$	1~4	dB	0	0	-Infinity	9
SSB RSRP Note3	1,2	dBm/SSB SCS	-96	-96	-Infinity	-87
	3,4		-93	-93	-Infinity	-84
Io Note3	1,2	dBm/95.04MHz	-63.97	-63.97	-67	-57.5
	3,4		-63.97	-63.97	-67	-57.5
$\hat{E}_s / N_{oc}$	1~4	dB	0	0	-Infinity	9

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SSB RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Table A.5.6.6.2.2-3: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0		CSI-RS#1	
			T1	T2	T1	T2
Angle of arrival configuration			Setup 1 according to A.3.15.1			
Beam assumption Note 4			Rough			
N_{oc} Note2	1~4	dBm/15kHz	-105			
N_{oc} Note2	1~4	dBm/CSI-RS SCS	-96			
$\hat{E}_s / I_{ot}$	1~4	dB	0	0	-Infinity	9
$\hat{E}_s / N_{oc}$	1~4	dB	0	0	-Infinity	9
CSI-RS RSRP Note3	1~4	dBm/ CSI-RS SCS	-96	-96	-Infinity	-87
Io Note3	1~4	dBm/95.04MHz	-63.97	-63.97	-67	-57.5

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.5.6.6.2.3 Test Requirements

The UE shall send L1-SINR report every 640 slots. No later than X ms plus 640 slots from the beginning of time period T2, UE shall send L1-SINR report including the results for both SSB#0+CSI-RS#0 and SSB#1+CSI-RS#1 while meeting the accuracy requirements defined in clause 10.1.28.2, where X is

- 2880 for UE supporting power class 1
- 1920 for UE supporting power class 2, 3 or 4.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.5.6.6.3 L1-SINR measurement with CSI-RS based CMR and dedicated IMR configured when DRX is not used

A.5.6.6.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-SINR measurement. This test will partly verify the L1-SINR measurement requirements with CSI-RS based CMR and dedicated IMR cofigured in clause 9.8.4.3, with the testing configurations for NR cells in Table A.5.6.6.3.1-1.

Table A.5.6.6.3.1-1: Applicable NR configurations for FR2 L1-SINR test with CMR and dedicated IMR

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.5.6.6.3.2 Test parameters

There are two cells in the test, E-UTRAN PCell (Cell 1) and FR2 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.5.6.6.3.2-1 and Table A.5.6.6.3.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-SINR measurement on the configured CSI-RS as CMR and an associated CSI-IM as IMR, and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-SINR on aperiodic CSI-RS resources and the associated IMR. UE is also configured to measure L1-SINR based on SSB. After 480ms from the beginning of the test, the DCI trigger comes in slot 8 of a frame and UE provides the report back based on the reporting configuration as defined in Table A.5.6.6.3.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs, and UE is configured to perform L1-SINR measurement based on the CSI-RS as CMR and the CSI-IM as IMR.

Table A.5.6.6.3.2-1: General test parameters

Parameter	Config	Unit	Value

SSB GSCN	1~2		freq1
Duplex mode	1~2		TDD
TDD Configuration	1~2		TDDConf.3.1
$BW_{channel}$	1~2	MHz	100: $N_{RB,c}$ = 66
PDSCH Reference measurement channel	1~2		SR.3.1 TDD
RMSI CORESET Reference Channel	1~2		CR.3.1 TDD
Dedicated CORESET Reference Channel	1~2		CCR.3.1 TDD
SSB configuration	1~2		SSB.1 FR2
CSI-RS configuration	1~2		CSI-RS.3.3 TDD
CSI-IM configuration	1~2		CSI-IM.3.2 TDD
OCNG Patterns	1~2		OP.1
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~2		DLBWP.1.3 ULBWP.1.3
SMTC configuration	1~2		SMTC.1
TRS Configuration	1~2		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~2		TCI.State.2
DRX configuration	1~2		Off
reportConfigType	1~2		aperiodic
reportQuantity-r16	1~2		cri-SINR-r16
Number of reported RS	1~2		2
qcl-Info	1~2		SSB#0 for resource#0 SSB#1 for resource#1
reportSlotOffsetList	1~2		26
T1	1~2	s	5
EPRE ratio of PSS to SSS	1~2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~2		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.5.6.6.3.2-2: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
Angle of arrival configuration	1~2		Setup 1 according to A.3.15.1	
Assumption for UE beams Note 3	1~2		Rough	
N_{oc} Note1	1~2	dBm/15kHz	-105	

N_{oc} Note1	1~2	dBm/SSB SCS	-95.97	
$\hat{E}_s / I_{ot}$	1~2	dB	0	9
CSI-RS RSRP Note2	1~2	dBm/SSB SCS	-95.97	-86.97
Io Note2	1~2	dBm/95.04MHz	-63.97	-57.47
$\hat{E}_s / N_{oc}$	1~2	dB	0	9
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 2: CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 3: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.5.6.6.3.3 Test Requirements

After 480ms from the beginning of the test, the UE shall send L1-SINR report at slot 26 from the reception of DCI triggering the L1-SINR measurement. The L1-SINR report shall include the results for both CSI-RS#0 as CMR + CSI-IM#0 as IMR and CSI-RS#1 as CMR + CSI-IM#1 as IMR while meeting the accuracy requirements defined in clause 10.1.28.3. The reported L1-SINR value shall consider the Rx antenna gain in the range of [-10 ~ +20] dB when calculated.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.5.6.7 CSI-RS based Intra-frequency Measurements

A.5.6.7.1 EN-DC event triggered reporting test without gap under non-DRX

A.5.6.7.1.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell identification requirements in clause e. Supported test configurations are shown in table A.5.6.7.1.1-1.

Table A.5.6.7.1.1-1: supported test configurations

Configuration	Description
1	LTE FDD, 120 kHz SSB SCS, 120Khz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, 120 kHz SSB SCS, 120Khz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are three cells in the test, E-UTRAN PCell (Cell 1), FR2 PSCell (Cell 2) and a FR2 neighbour cell (Cell 3) on the same frequency as the PSCell. The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 and Cell 3 are given in Table A.5.6.7.1.1-2, A.5.6.7.1.1-3 and A.5.6.7.1.1-4 below.

In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 3.

Table A.5.6.7.1.1-2: General test parameters for intra-frequency event triggered reporting for EN-DC with PSCell in FR2 without gap without DRX

Parameter	Unit	Config	Value	Comment
Active cell		1,2	E-UTRAN PCell (Cell 1) PSCell (Cell 2)	
Neighbour cell		1,2	Cell 3	Cell to be identified.
RF Channel Number		1,2	1: Cell 1 2: Cell 2 and Cell 3	One TDD carrier frequency is used for the NR cells and one TDD or FDD carrier frequency is used for E-UTRAN cell.
SMTC configuration		1,2	SMTC.1	
A3-Offset	dB	1,2	-6	
CP length		1,2	Normal	
Hysteresis	dB	1,2	0	
Time To Trigger	s	1,2	0	
Filter coefficient		1,2	0	L3 filtering is not used
DRX		1,2	OFF	
Time offset between Cell 1 and Cell 2	µs	1,2	3	Synchronous EN-DC
Time offset between Cell 2 and Cell 3	µs	1,2	0.58	Synchronous cells
T1	s	1,2	5	
T2	s	1,2	5	

Table A.5.6.7.1.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for EN-DC with PSCell in FR2 without gap without DRX

Parameter	Unit	Config	Cell 2		Cell 3	
			T1	T2	T1	T2
TDD configuration		1,2	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	1,2	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Intial BWP configuration		1,2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1,2	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1,2	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1,2	SSB		SSB	
PDSCH RMC configuration		1,2	SR.3.1 TDD		N/A	
RMSI CORESET RMC configuration		1,2	CR.3.1 TDD		CR.3.1 TDD	
Dedicated CORESET RMC configuration		1,2	CCR.3.1 TDD		CCR.3.1 TDD	
OCNG Patterns		1,2	OP.1		OP.1	
TRS configuration		1,2	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI state		1,2	TCI.State.2		N/A	
SMTC configuration		1, 2	SMTC.1		SMTC.1	
SSB configuration		1,2	SSB.3 FR2		SSB.3 FR2	
CSI-RS RRM configuration		1,2	CSI-RS.RRM.FR2.1 TDD		CSI-RS.RRM.FR2.1 TDD	
Propagation Condition		1,2	AWGN			

Table A.5.6.7.1.1-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for EN-DC with PSCell in FR2 without gap without DRX

Parameter	Unit	Config	Cell 2		Cell 3	
			T1	T2	T1	T2
AoA setup		1,2	Setup 3 defined in A.3.15.3			
			AoA1		AoA2	
Assumption for UE beams[Note 4]		1,2	Rough		Rough	
$\hat{E}_s/I_{ot}$	dB	1,2	4	4	-Infinity	8
N_{oc} [Note 2]	dBm/15 KHz	1,2	-102			
N_{oc} [Note 2]	dBm/SCS	1,2	-93			
SS-RSRP	dBm/SCS	1,2	-89	-89	-Infinity	-85
CSI-RSRP	dBm/SCS	1,2	-89	-89	-Infinity	-85
$\hat{E}_s/N_{oc}$	dB	1,2	4	4	-Infinity	8
Io	dBm/95.04MHz	1,2	-58.56		-55.38	

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.

A.5.6.7.1.2 Test Requirements

In the test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 3.2s for a UE supporting power class 1,
- 2.16s for a UE supporting power class 2, 3 and 4

The UE is not required to read the neighbour cell SSB index in this test in order to detect associated SSB for the CSI-RS resource of Cell 3.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to 2xTTIDCCH higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.5.6.8 CSI-RS based Inter-frequency Measurements

A.5.6.8.1 EN-DC event triggered reporting tests for NR FR2 cell when DRX is used

A.5.6.8.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.10.3.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR2 on NR RF channel 1 and NR cell 3 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.5.6.8.1.1-1, A.5.6.8.1.1-2, and A.5.6.8.1.1-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table A.5.6.8.1.1-2 is provided for UE that does not support per-FR gap and in test 3&4 measurement gap pattern configuration #13 as defined in Table A. 5.6.7.1.1-2 is provided for UE that supports per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 3&4. Otherwise it is only required to pass test 1&2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A4 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.2-1. Supported test configurations are shown in table A.5.6.8.1.1-1.

Table A.5.6.8.1.1-1 EN-DC event triggered reporting tests for FR2-FR2

Config	Description
1	LTE FDD, 120 kHz SSB SCS, 120 kHz CSI-RS SCS,100 MHz bandwidth, TDD duplex mode
2	LTE TDD, 120 kHz SSB SCS, 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furhtermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.5.6.8.1.1-2: General test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection with DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 3	
E-UTRA RF Channel Number		Config 1,2	1		One E-UTRAN TDD carrier frequencies is used.
NR RF Channel Number		Config 1,2	1, 2		Two FR2 NR carrier frequencies is used.
Active cell		Config 1,2	LTE Cell 1 (PCell) and NR cell 2 (PScell)		LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.
Neighbour cell		Config 1,2	NR cell 3		NR cell 3 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2	0	13	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2	39	39	
SMTC-SSB parameters		Config 1,2	SSB.3 FR2		As specified in clause A.3.10.2
A3-Offset	dB	Config 1,2	-6		
Hysteresis	dB	Config 1,2	0		
CP length		Config 1,2	Normal		
TimeToTrigger	s	Config 1,2	0		
Filter coefficient		Config 1,2	0		L3 filtering is not used
DRX		Config 1,2	DRX.1		As specified in clause A.3.3.3
Time offset between PCell and PSCell	μs	Config 1,2	3		Synchronous EN-DC

Time offset between serving and neighbour cells	µs	Config 1,2	0.58		Synchronous cells
T1	s	Config 1,2	5		
T2	s	Config 1,2	11 for PC1; 6.5 for other PC	11 for PC1; 6.5 for other PC	

Table A.5.6.8.1.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
AoA setup		Config 1,2	Setup 1 as specified in clause A.3.15			
Assumption for UE beams Note 7		Config 1,2	Rough		Rough	
NR RF Channel Number		Config 1,2	1		2	
Duplex mode		Config 1,2	TDD		TDD	
$BW_{channel}$	MHz	Config 1,2	10: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP BW	MHz	Config 1,2	10: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
TDD configuration		Config 1,2	TDDConf.3.1		TDDConf.3.1	
Initial DL BWP		Config 1,2	DLBWP.0.1		NA	
Initial UL BWP		Config 1,2	ULBWP.0.1			
Dedicated DL BWP		Config 1,2	DLBWP.1.1		NA	
Dedicated UL BWP		Config 1,2	ULBWP.1.1		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		Config 1,2	OP.1		OP.1	
PDSCH Reference measurement channel		Config 1,2	SR.3.1 TDD		-	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2	120		120	
CORESET Reference Channel		Config 1,2	CR.3.1 TDD		-	
TRS configuration		Config 1,2	TRS.2.1 TDD		NA	
TCI configuration		Config 1,2	CSI-RS.Config.0		NA	
SMTC configuration defined in A.3.11		Config 1,2	SMTC.1		SMTC.1	
CSI-RS RRM configuration		Config 1,2	CSI-RS.RRM.FR2.1 TDD		CSI-RS.RRM.FR2.1 TDD	
firstOFDMSymbolInTimeDomain		Config 1,2	7		12	
N_{oc} Note2	dBm/15kHz Note5		-104.7		-104.7	
N_{oc} Note2	dBm/SCS Note4	Config 1,2	-95.7		-95.7	
CSI-RSRP Note 3	dBm/SCS Note5	Config 1,2	-89.7	-89.7	-Infinity	-86.7
SS-RSRP Note 3	dBm/SCS Note5	Config 1,2	-89.7	-89.7	-Infinity	-86.7
$\hat{E}_s / I_{ot}$	dB	Config 1,2	6	6	-Infinity	9
$\hat{E}_s / N_{oc}$	dB	Config 1,2	6	6	-Infinity	9

Io[Note3]	dBm/95.04 MHz Note5	Config 1,2	-59.7	-59.7	-66.7	-57.2
Propagation Condition		Config 1,2,3,4,5,6	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP, CSI-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRP and CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 6: As observed with 0dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.5.6.8.1.2 Test Requirements

In test 1 with per-UE gap and in test 3 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X1 ms from the beginning of time period T2, where X1 is

10080 ms for UE supporting power class 1, or

6240 ms for UE supporting other power class.

In test 1, and 2 UE is required to report SSB time index. The UE is required to read the neighbour cell SSB index in this test in order to detect associated SSB for the CSI-RS resource of Cell 3.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.5.7 Measurement Performance requirements

Unless explicitly stated otherwise:

- Reported measurements shall be within defined range of accuracy limits defined in Clause 10 for at least 90 % of the reported cases. If multiple measurement performance requirements are verified in the same test, the reported measurements for each requirement shall be within defined range of accuracy limits of the corresponding requirement defined in Clause 10 for at least 90% of the reported cases.

- Measurements are performed in RRC_CONNECTED state.

- The reference channels assume transmission of PDSCH with a maximum number of 5 HARQ transmissions unless otherwise specified.

A.5.7.1 SS-RSRP

A.5.7.1.1 EN-DC intra-frequency case measurement accuracy with FR2 serving cell and FR2 target cell

A.5.7.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 10.1.3.1.1 and 10.1.3.1.2 for intra-frequency measurements.

A.5.7.1.1.2 Test parameters

In this set of test cases, all NR cells are on the same carrier frequency. Supported test configurations are shown in Table A.5.7.1.1.2-1. Both absolute and relative accuracy of SS-RSRP intra-frequency measurements are tested by using the parameters in Table A.5.7.1.1.2-2 and A.5.7.1.1.2-3. The E-UTRA PCell is configured as specified in clause A.3.7.2.2. In all test cases, Cell 1 is the PCell, cell 2 is the PSCell and Cell 3 is the target cell. The test consists of two time phases T1 and T2.

Table A.5.7.1.1.2-1: SS-RSRP Intra frequency SS-RSRP supported test configurations

Configuration	Description
1	FDD LTE PCell, Cell 2&3 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	TDD LTE PCell, Cell 2&3 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations	

Table A.5.7.1.1.2-2: SS-RSRP Intra frequency general test parameters

Parameter[Note 5]		Unit	T1		T2	
			Cell 2	Cell 3	Cell 2	Cell 3
Physical cell ID			489	0	489	0
SSB ARFCN			freq1		freq1	
Duplex mode			TDD		TDD	
TDD configuration			TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$		MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated			24		24	
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
TRS configuration			TRS.2.1 TDD	-	TRS.2.1 TDD	-
TCI state			TCI.State.0	-	TCI.State.0	-
PDSCH Reference measurement channel			SR.3. 2 TDD	-	SR.3. 2 TDD	-
RMSI CORESET Reference Channel			CR.3.1 TDD	-	CR.3.1 TDD	-
Dedicated CORESET Reference Channel			CCR.3.1 TDD	-	CCR.3.1 TDD	-
OCNG Patterns			OP.3	OP.3	OP.3	OP.3
SSB configuration			SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
SMTC configuration			SMTC.1	SMTC.1	SMTC.1	SMTC.1

Time offset with Cell 2	µs	-	3	-	3
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
Propagation conditions		AWGN		AWGN	
Antenna configuration		1x2	1x2	1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: Void
Note 4: Void
Note 5: All parameters apply for configuration 1 and 2
Note 6: Void

Table A.5.7.1.1.2-3: SS-RSRP Intra frequency OTA related test parameters

Parameter	Unit	T1		T2	
		Cell 2	Cell 3	Cell 2	Cell 3
Angle of arrival configuration		Setup 1 according to clause A.3.15.1			
Assumption for UE beams Note 8		Rough			
N_{oc} Note1	dBm/15kHz Note4	-91.6		N/A	
N_{oc} Note1	dBm/SCS Note4	-82.6		N/A	
$\hat{E}_s / N_{oc}$	dB	6.0	1.0	N/A	N/A
E_s	dBm/SCS Note4			(Table B.2.2-2 Rx Beam Peak +2.1dB)	(Table B.2.2-2 Rx Beam Peak +2.1dB)
SSB_RP Note2	dBm/SCS	-76.6	-81.6	(Table B.2.2-2 Rx Beam Peak +2.1dB)	(Table B.2.2-2 Rx Beam Peak +2.1dB)
$\hat{E}_s / I_{ot}$ BB Note6	dB	2.44	-5.98	-5.98	-5.98
Io Note2	dBm/95.04 MHz Note4	-50.05		(Table B.2.2-2 Rx Beam Peak +29.70dB)	

Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SSB_RP, Es/Iot, Es in test 1 and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: Void

Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5:	Void
Note 6:	Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.
Note 7:	All parameters apply for configurations 1 and 2
Note 8:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.5.7.1.1.3 Test Requirements

The SS-RSRP measurement accuracy shall fulfil the absolute accuracy requirements in clauses 10.1.3.1.1 and relative accuracy requirements in clause 10.1.3.1.2. The following requirements are to be verified:

During T1:

Absolute accuracy of Cell 2 and absolute accuracy of Cell 3. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in table A.5.7.1.1.3-1.

Relative accuracy of Cell 3 compared with Cell 2. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in Table 10.1.3.1.2-1.

During T2:

Absolute accuracy of Cell 2 and absolute accuracy of Cell 3. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in table A.5.7.1.1.3-1.

Relative accuracy of Cell 3 compared with Cell 2. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in Table 10.1.3.1.2-1.

During T1 and T2:

Relative accuracy of Cell 2 during T2 compared with Cell 2 during T1. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in Table 10.1.3.1.2-1

Relative accuracy of Cell 3 during T2 compared with Cell 3 during T1. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in Table 10.1.3.1.2-1.

Table A.5.7.1.1.3-1: SS-RSRP absolute accuracy test requirement

	Test requirement Notes1,2,3
Cell 2	$SSB_RP2 - \delta + G_{min} \le$ Reported RSRP(dBm) $\le SSB_RP2 + \delta + G_{max}$
Cell 3	$SSB_RP3 - \delta + G_{min} \le$ Reported RSRP(dBm) $\le SSB_RP3 + \delta + G_{max}$
Note 1:	SSB_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration
Note 2:	δ is the RSRP absolute accuracy requirement from Table 10.1.3.1.1-1, selected according to the Io used in the test
Note 3:	G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class

A.5.7.1.2 EN-DC inter-frequency case measurement accuracy with FR2 serving cell and FR2 target cell

A.5.7.1.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 10.1.5.1.1 and 10.1.5.1.2 for inter-frequency measurements with the testing configurations for NR cells in Table A.5.7.1.2.1-1.

Table A.5.7.1.2.1-1: Applicable NR configurations for FR2 inter-frequency SS-RSRP accuracy test

Configuration	Description
1	FDD LTE PCell, cells 2&3 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	TDD LTE PCell, cells 2&3 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
3	FDD LTE PCell, cells 2&3 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
4	TDD LTE PCell, cells 2&3 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

A.5.7.1.2.2 Test parameters

In this set of test cases, there are three cells in the test, E-UTRAN PCell (Cell 1), FR2 PSCell (Cell 2) and a FR2 neighbour cell (Cell 3) on a different frequency than the PSCell. The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 and Cell 3 are given in Table A.5.7.1.2.2-1 and Table A.5.7.1.2.2-2 below. Both absolute and relative accuracy of RSRP intrer-frequency measurements are tested by using the parameters in Table A.5.7.1.2.2-1 and Table A.5.7.1.2.2-2. The inter-frequency measurements are supported by a measurement gap.

Table A.5.7.1.2.2-1: SS-RSRP inter-frequency test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN	1~4		freq1	freq2	freq1	freq2
$BW_{channel}$	1~4		100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated	1,2		24		24	
	3,4		48		48	
Duplex mode	1~4		TDD		TDD	
TDD configuration	1~4		TDDConf.3.1		TDDConf.3.1	
PDSCH Reference measurement channel	1,2		SR.3. 2 TDD	-	SR.3. 2 TDD	-
	3,4		SR.3.3 TDD		SR.3.3 TDD	
RMSI CORESET Reference Channel	1,2		CR.3.1 TDD	-	CR.3.1 TDD	-
	3,4		CR.3.2 TDD		CR.3.2 TDD	
Dedicated CORESET Reference Channel	1,2		CCR.3.1 TDD	-	CCR.3.1 TDD	-
	3,4		CCR.3.7 TDD		CCR.3.7 TDD	
SSB configuration	1,2		SSB.3 FR2		SSB.3 FR2	
	3,4		SSB.4 FR2		SSB.4 FR2	
PDSCH/PDCCH subcarrier spacing	1~4	kHz	120		120	
OCNG Patterns	1~4		OP.3		OP.3	

Initial BWP Configuration	1~4		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration	1~4		DLBWP.1.3 ULBWP.1.3		DLBWP.1.3 ULBWP.1.3	
TRS Configuration	1~4		TRS.2.1 TDD		TRS.2.1 TDD	
PDCCH/PDSCH TCI Configuration	1~4		TCI.State.2		TCI.State.2	
SMTC configuration	1~4		SMTC.1		SMTC.1	
Time offset between Cell 2 and Cell 3	1~4	µs	3		3	
EPRE ratio of PSS to SSS	1~4	dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS Note 1						
EPRE ratio of OCNG to OCNG DMRS Note 1						
Propagation condition	1~4	-	AWGN	AWGN	AWGN	AWGN
Antenna configuration	1~4	-	1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Void						

Table A.5.7.1.2.2-2: SS-RSRP inter frequency OTA related test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 2	Cell 3	Cell 2	Cell 3
Angle of arrival configuration	1~4		Setup 4b according to clause A.3.15.4.2		Setup 4b according to clause A.3.15.4.2	
			AoA1 Spherical coverage	AoA2 Rx Beam Peak	AoA1 Spherical coverage	AoA2 Rx Beam Peak
Assumption for UE beams Note 7	1~4		Rough		Rough	
N_{oc} Note1	1, 2	dBm/15kHz Note4	-90.6	-90.6	(Table B.2.3-2 Rx Beam Peak Note 8 +1.97dB)	(Table B.2.3-2 Rx Beam Peak Note 8 -3.03dB)
	3, 4		-93.7	-93.7		
N_{oc} Note1	1, 2	dBm/SCS Note4	-81.6	-81.6	(Table B.2.3-2 Rx Beam Peak Note 8 +11.0dB)	(Table B.2.3-2 Rx Beam Peak Note 8 +6.0dB)
	3, 4		-81.7	-81.7	(Table B.2.3-2 Rx Beam	(Table B.2.3-2 Rx Beam

					Peak[Note 8] +14.0dB)	Peak[Note 8] +9.0dB)
$\hat{E}_s / N_{oc}$	1~4	dB	6.0	6.0	17.0	-1.0
SSB_RP[Note2]	1, 2	dBm/SCS	-75.6	-75.6	(Table B.2.3-2 Rx Beam Peak[Note 8] +28.0dB)	(Table B.2. 3-2 Rx Beam Peak[Note 8] +5.0dB)
	3, 4		-75.7	-75.7	(Table B.2.3-2 Rx Beam Peak[Note 8] +31.0dB)	(Table B.2. 3-2 Rx Beam Peak[Note 8] +8.0dB)
($SSB_RP_{Cell\ 2}$ – $SSB_RP_{Cell\ 3}$)	1~4	dB	0		23.00	
$\hat{E}_s / I_{ot\ BB}$[Note6]	1, 2	dB	5.26	5.96	9.53	-3.46
	3, 4		4. 61	5.91		
Io[Note2]	1, 2	dBm/95.04 MHz [Note4]	-50.00	-50.00	(Table B.2.3-2 Rx Beam Peak[Note 8] +52.68dB)	(Table B.2.3-2 Rx Beam Peak[Note 8] +33.13dB)
	3, 4		-50.09	-50.09	(Table B.2.3-2 Rx Beam Peak[Note 8] +55.69dB)	(Table B.2.3-2 Rx Beam Peak[Note 8] +36.14dB)
($Io_{freq\ 1}$ – $Io_{freq\ 2}$)	1~4	dB	0		19.55	

Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 2: SSB_RP, Es/Iot, Io, ($SSB_RP_{Cell\ 3}$ – $SSB_RP_{Cell\ 2}$) and ($Io_{freq\ 2}$ – $Io_{freq\ 1}$) levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 3: Void

Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone

Note 5: Void

Note 6: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P or ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.

Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Note 8: The value in Table B.2.3-2 is the Minimum SSB_RP for SCS_{SSB} = 120 kHz, selected according to the operating band of Cell 3 and UE power class, without $\Delta MB_{P,n}$ adjustment.

A.5.7.1.2.3 Test Requirements

The SS-RSRP measurement accuracy for Cell 2 and Cell 3 shall fulfil the absolute requirements in clause 10.1.5.1.1 and the relative requirements in clause 10.1.5.1.2.

Test 1:

Absolute accuracy of Cell 2 and absolute accuracy of Cell 3. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in Table A.5.7.1.2.3-1.

Relative accuracy of Cell 3 compared with Cell 2. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in A.5.7.1.2.3-2.

Test 2:

Absolute accuracy of Cell 2 and absolute accuracy of Cell 3. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in Table A.5.7.1.2.3-1.

Relative accuracy of Cell 3 compared with Cell 2. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in A.5.7.1.2.3-2.

Table A.5.7.1.2.3-1: SS-RSRP absolute accuracy test requirement

	Test requirement Notes1,2,3,4
Cell 2	SSB_RP2 -δ +G_{min} +X ≤ Reported RSRP(dBm) ≤ SSB_RP2 +δ +G_{max}
Cell 3	SSB_RP3 -δ +G_{min} ≤ Reported RSRP(dBm) ≤ SSB_RP3 +δ +G_{max}
Note 1:	SSB_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration
Note 2:	δ is the RSRP absolute accuracy requirement from Table 10.1.5.1.1-1, selected according to the Io used in the test
Note 3:	G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class
Note 4:	X is the Spherical coverage gain difference in dB, derived as (UE Refsens - UE Spherical coverage) from TS 38.101-2 [19] clauses 7.3.2 and 7.3.4, selected according to the UE power class and operating band. X is always a negative value.

Table A.5.7.1.2.3-2: SS-RSRP relative accuracy test requirement

	Test requirement Notes1,2,3,4, 5, 6, 7
Cell 3 – Cell 2	SSB_RP3 - SSB_RP2 -δ - D - G_{inter} ≤ Reported RSRP(dB) ≤ SSB_RP3 - SSB_RP2 +δ + G_{inter} –(X) + E
Note 1:	SSB_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration
Note 2:	δ is the RSRP relative accuracy requirement from Table 10.1.5.1.2-1
Note 3:	Void
Note 4:	X is the Spherical coverage gain difference in dB, derived as (UE Refsens - UE Spherical coverage) from TS 38.101-2 [19] clauses 7.3.2 and 7.3.4, selected according to the UE power class and operating band. X is always a negative value.
Note 5:	D is the margin due to mis-alignment between fine beam and rough beam. D is the Rough Beam gain reduction in Rx beam peak direction from Table B.2.1.5.3-1, selected according to the UE power class. D is always a positive value.
Note 6:	G_{inter} is the margin due to different antenna gain caused by frequency separation. G_{inter} is from Table B.2.1.5.2-1, selected according to the UE power class, and is always a positive value.
Note 7:	E = 3 (dB) is an additional margin to account for the actual gain difference between peak direction and spherical coverage using rough beams.

A.5.7.1.3 EN-DC inter-frequency measurement accuracy with FR1 serving cell and FR2 target cell

A.5.7.1.3.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 10.1.5.1.1 for inter-frequency measurements with the testing configurations in Table A.5.7.1.3.1-1.

Table A.5.7.1.3.1-1: Applicable NR configurations for FR2 inter-frequency SS-RSRP accuracy test

Config	Description of serving cell	Description of target cell

1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	
Note: The UE is only required to be tested in one of the supported test configurations		

A.5.7.1.3.2 Test parameters

In this set of test cases there are three cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and a FR2 neighbour cell (Cell 3) on a different frequency than the PSCell. The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 and Cell 3 are given in Table A.5.7.1.3.2-1 and Table A.5.7.1.3.2-2 below. Absolute accuracy of RSRP inter-frequency measurements are tested by using the parameters in Table A.5.7.1.3.2-1 and Table A.5.7.1.3.2-2. The inter-frequency measurements are supported by a measurement gap.

Table A.5.7.1.3.2-1: SS-RSRP inter-frequency test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN	1~6		freq1	freq2	freq1	freq2
$BW_{channel}$	1,4	MHz	10: $N_{RB,c}$ = 52	100: $N_{RB,c}$ = 66	10: $N_{RB,c}$ = 52	100: $N_{RB,c}$ = 66
	2,5		10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
	3,6		40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
Data RBs allocated	1,2,4,5		52	24	52	66
	3,6		106		106	
Gap pattern ID			0		0	
Duplex mode	1,4		FDD	TDD	FDD	TDD
	2,5		TDD		TDD	
	3,6		TDD		TDD	
TDD configuration	1,4		N/A	TDDConf. 3.1	N/A	TDDConf. 3.1
	2,5		TDDConf. 1.1		TDDConf. 1.1	
	3,6		TDDConf. 2.1		TDDConf. 2.1	
PDSCH Reference measurement channel	1,4		SR.1.1 FDD	-	SR.1.1 FDD	-
	2,5		SR.1.1 TDD		SR.1.1 TDD	
	3,6		SR.2.1 FDD		SR.2.1 FDD	
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD	-	CR.1.1 FDD	-
	2,5		CR.1.1 TDD	-	CR.1.1 TDD	-
	3,6		CR.2.1 FDD	-	CR.2.1 FDD	-
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	2,5		CCR.1.1 TDD	-	CCR.1.1 TDD	-
	3,6		CCR.2.1 TDD	-	CCR.2.1 TDD	-
SSB configuration	1,4		SSB.1 FR1	SSB.3 FR2	SSB.1 FR1	SSB.3 FR2
	2,5		SSB.1 FR1		SSB.1 FR1	

	3,6		SSB.2 FR1		SSB.2 FR1	
OCNG Patterns	1~6		OP.1	OP.3	OP.1	OP.1
Initial BWP Configuration	1~6		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration	1~6		DLBWP.1.3 ULBWP.1.3		DLBWP.1.3 ULBWP.1.3	
TRS Configuration	1~6		TRS.2.1 TDD		TRS.2.1 TDD	
PDCCH/PDSCH TCI Configuration	1~6		TCI.State.2		TCI.State.2	
SMTC configuration	1~6		SMTC.1		SMTC.1	
Time offset between Cell 2 and Cell 3	1~6	µs	3		3	
EPRE ratio of PSS to SSS	1~6	dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS Note 1						
EPRE ratio of OCNG to OCNG DMRS Note 1						
Propagation condition	1~6	-	NA	AWGN	NA	AWGN
Antenna configuration	1~6	-	Link only, see clause A.3.7A	1x2	Link only, see clause A.3.7A	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Void						

Table A.5.7.1.3.2-2: SS-RSRP inter-frequency OTA related test parameters

Parameter	Config	Unit	Test 1		Test 2 NOTE 3	
			Cell 2	Cell 3	Cell 2	Cell 3
Angle of arrival configuration according to clause A.3.15			NA	Setup 2b	NA	Setup 2b
Assumption for UE beams Note 4			N/A	Rough	N/A	Rough
N_{oc}	1~6	dBm/15 kHz	Link only, see clause A.3.7A	-90	Link only, see clause A.3.7A	NA
N_{oc}	1~6	dBm/SSB SCS		-80.97		NA
$\hat{E}_s / N_{oc}$	1~6	dB		5		NA
E_s	1~6	dBm/SCS				(Table B.2.3-2 Spherical coverage +1dB)
SSB_RP Note1	1~6	dBm/SCS		-76.0		(Table B.2.3-2 Spherical

						coverage +1dB)
$\hat{E}_s/I_{ot\ BB}$ Note6	1~6	dB		4.35		-3.81
Io Note1	1~6	dBm/ 95.04MHz		-50.18		SSB_RP+28.98

Note 1: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 2: Void
Note 3: No additional noise is added by the test system in Test 2.
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 5: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 6: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.

A.5.7.1.3.3 Test Requirements

The SS-RSRP measurement accuracy for Cell 3 shall fulfil the Absolute requirement in clause 10.1.5.1.1.

Test 1:

Absolute accuracy of Cell 3. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in Table A.5.7.1.3.3.

Test 2:

Absolute accuracy of Cell 3. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in Table A.5.7.1.3.3.

Table A.5.7.1.3.3: SS-RSRP absolute accuracy test requirement

	Test requirement Notes1,2,3,4
Cell 3	SSB_RP2 -δ +Gmin +X ≤ Reported RSRP(dBm) ≤ SSB_RP2 +δ +Gmax

Note 1: SSB_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration
Note 2: δ is the RSRP absolute accuracy requirement from Table 10.1.5.1.1-1, selected according to the Io used in the test
Note 3: Gmin and Gmax are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class
Note 4: X is the Spherical coverage gain difference in dB, derived as (UE Refsens - UE Spherical coverage) from TS 38.101-2 [19] clauses 7.3.2 and 7.3.4, selected according to the UE power class and operating band. X is always a negative value.

A.5.7.2 SS-RSRQ

A.5.7.2.1 EN-DC Intra-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell

A.5.7.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.8.1.1.

A.5.7.2.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configurations are shown in Table A.5.7.2.1.2-1. The absolute accuracy of SS-RSRQ intra-frequency measurement is test by using the parameters in Table A.5.7.2.1.2-2 and Table A.5.7.2.1.2-3. The configuration of cell 1 (E-UTRA PCell) is specified in clause A.3.7.2.1. In all test cases, Cell 2 is the PSCell and Cell 3 is the target cell.

Table A.5.7.2.1.2-1: SS-RSRQ Intra frequency SS-RSRQ supported test configurations

Configuration	Description
1	FDD LTE PCell, Cell 2&3 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	TDD LTE PCell, Cell 2&3 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations	

Table A.5.7.2.1.2-2: SS-RSRQ Intra frequency test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN			Freq1		Freq1	
Duplex mode			TDD		TDD	
TDD configuration			TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$		MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated			66		66	
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
TRS configuration			TRS.2.1 TDD		TRS.2.1 TDD	
TCI state			TCI.State .0		TCI.State .0	
PDSCH Reference measurement channel			SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET Reference Channel			CR.3.1 TDD	-	CR.3.1 TDD	-
Control channel RMC			CCR.3.1 TDD	-	CCR.3.1 TDD	-
OCNG Patterns			OP.1	OP.1	OP.1	OP.1
SMTC configuration			SMTC.1			
SSB configuration			SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
PDSCH/PDCCH subcarrier spacing		kHz	120	120	120	120
SS-RSSI-Measurement			Not Applicable			
EPRE ratio of PSS to SSS		dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						
EPRE ratio of PDCCH to PDCCH_DMRS						

EPRE ratio of PDSCH_DMRS to SSS EPRE ratio of PDSCH to PDSCH_DMRS EPRE ratio of OCNG DMRS to SSS Note 1 EPRE ratio of OCNG to OCNG DMRS Note 1					
Propagation condition		AWGN		AWGN	
Antenna Configuration		1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Void Note 3: Void Note 4: Void Note 5: Void					

Table A.5.7.2.1.2-3: SS-RSRQ Intra frequency OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 2	Cell 3	Cell 2	Cell 3
Angle of arrival configuration		Setup 1 according to clause A.3.15.1		Setup 1 according to clause A.3.15.1	
Assumption for UE beams Note 9		Rough			
N_{oc} Note1	dBm/15kHz Note4	-95		-95	
N_{oc} Note1	dBm/SCS Note3	-86		-86	
$\hat{E}_s / N_{oc}$	dB	3		3	
SSB_RP Note2	dBm/SCS Note4	-83	-83	-89	-89
SS-RSRQ Note2	dB	-14.77	-14.77	-16.81	-16.81
$\hat{E}_s / I_{ot}$	dB	-1.76	-1.76	-4.76	-4.76
Io Note2	dBm/95.04 MHz Note4	-50		-54	Io Note2

Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2:	SS-RSRQ, SSB_RP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	SS-RSRQ and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5:	As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6:	Void
Note 7:	Void
Note 8:	Void
Note 9:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.5.7.2.1.3 Test Requirements

The SS-RSRQ absolute measurement accuracy in test 1 shall be within the range Nominal SS-RSRQ+2.5dB to Nominal SS-RSRQ -2.5dB and the SS-RSRQ measurement accuracy in test 2 shall be within the range Nominal SS-RSRQ +3.5dB to Nominal SS-RSRQ -3.5dB according to the requirements in clause 10.1.8.1.1. Nominal SS-RSRQ is the value shown in table A.5.7.2.1.2-3.

A.5.7.2.2 EN-DC Inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell

A.5.7.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.9.1.1 and 10.1.9.1.2 for inter-frequency measurement.

A.5.7.2.2.2 Test Parameters

In this test case the two NR cells (i.e., Cell 2 and Cell 3) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.5.7.2.2.2-1. Both absolute accuracy and relative accuracy requirements of SS-RSRQ inter-frequency measurement are tested by using test setup in Table A.5.7.2.2.2-2 and Table A.5.7.2.2.2-3. In all test cases, Cell 2 is the PSCell and Cell 3 is target cell. Cell 1 is the E-UTRA cell which specific test parameters for this test case are specified in Table A.3.7.2.1-1.

Table A.5.7.2.2.2-1: SS-RSRQ Inter frequency SS-RSRQ supported test configurations

Configuration	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.5.7.2.2.2-2: SS-RSRQ Inter frequency general test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN			Freq1	freq2	freq1	Freq2
Duplex mode			TDD		TDD	
TDD configuration			TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$		MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			

TRS configuration		TRS.2.1 TDD	-	TRS.2.1 TDD	-
TCI state		TCI.State.0	-	TCI.State.0	-
Data RBs allocated		66		66	
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-
OCNG Patterns		OP.1	OP.1	OP.1	OP.1
SSB configuration		SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
SMTC configuration		SMTC.1 FR2	SMTC.1 FR2	SMTC.1 FR2	SMTC.1 FR2
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
Propagation conditions		AWGN	AWGN	AWGN	AWGN
Antenna configuration		1x2	1x2	1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: Void
Note 4: Void

Table A.5.7.2.2.2-3: SS-RSRQ Inter frequency OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 2	Cell 3	Cell 2	Cell 3
AoA setup		Setup 1 in clause A.3.15		Setup 1 in clause A.3.15	
Assumption for UE beams Note 8		Rough		Rough	
N_{oc} Note1	dBm/15kHz Note4	-94.03		-94.03	
N_{oc} Note1	dBm/SCS Note3	-85.0		-85.0	
$\hat{E}_s / N_{oc}$	dB	-1.75		-1.75	

SSB_RP[Note2]	dBm/SCS Note4	-86.75	-86.75	-88	-88
SS-RSRQ[Note2]	dB	-14.75	-14.75	-15.56	-15.56
$\hat{E}_s / I_{ot}$	dB	-1.75	-1.75	-3	-3
Io[Note2]	dBm/95.04 MHz Note4	-53.8	-53.8	-54.25	-54.25

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SS-RSRQ, SSB_RP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: SS-RSRQ and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6: Void
Note 7: Void
Note 8: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.5.7.2.2.3 Test Requirements

The SS-RSRQ absolute measurement accuracy in test 1 shall be within the range Nominal SS-RSRQ+2.5dB to Nominal SSRQ-2.5dB and the SS-RSRQ measurement accuracy in test 2 shall be within the range Nominal SS-RSRQ+3.5dB to Nominal SS-RSRQ-3.5dB according to the requirements in clause 10.1.10.1.1.

The SS-RSRQ relative measurement accuracy shall fulfil the requirements in clause 10.1.10.1.2.

A.5.7.3 SS-SINR

A.5.7.3.1 EN-DC Intra-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell

A.5.7.3.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.13.1.1.

A.5.7.3.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configurations are shown in Table A.5.7.3.1.2-1. The absolute accuracy of SS-SINR intra-frequency measurement is test by using the parameters in Table A.5.7.3.1.2-2 and Table A.5.7.3.1.2-3. The configuration of cell 1 (E-UTRA PCell) is specified in clause A.3.7.2.1. In all test cases, Cell 2 is the PSCell and Cell 3 is the target cell.

Table A.5.7.3.1.2-1: SS-SINR Intra frequency SS-SINR supported test configurations

Configuration	Description
1	FDD LTE PCell, Cell 2&3 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	TDD LTE PCell, Cell 2&3 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations	

Table A.5.7.3.1.2-2: SS-SINR Intra frequency test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN		Freq2		Freq2	
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		66		66	
Downlink initial BWP configuration		DLBWP.0.1			
Downlink dedicated BWP configuration		DLBWP.1.1			
Uplink initial BWP configuration		ULBWP.0.1			
Uplink dedicated BWP configuration		ULBWP.1.1			
DRX cycle configuration	ms	Not applicable			
TRS configuration		TRS.2.1 TDD			
TCI state		TCI.State.0			
PDSCH Reference measurement channel		SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-
Dedicated RMSI CORESET Reference Channel		CCR.3 .1 TDD	-	CCR.3. 1 TDD	-
OCNG Patterns		OP.1	OP.1	OP.1	OP.1
SMTC configuration		SMTC.1			
SSB configuration		SSB.1 FR2	SSB.1 FR2	SSB.1 FR2	SSB.1 FR2
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
SS-RSSI-Measurement		Not Applicable			
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					

EPRE ratio of PDSCH_DMRS to SSS EPRE ratio of PDSCH to PDSCH_DMRS EPRE ratio of OCNG DMRS to SSS Note 1 EPRE ratio of OCNG to OCNG DMRS Note 1					
Propagation conditions		AWGN		AWGN	
Antenna configuration		1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Void Note 3: Void Note 4: Void					

Table A.5.7.3.1.2-3: SS-SINR Intra frequency OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 2	Cell 3	Cell 2	Cell 3
Angle of arrival configuration		Setup 1 according to clause A.3.15.1		Setup 1 according to clause A.3.15.1	
Assumption for UE beams Note 9		Rough		Rough	
N_{oc} Note1	dBm/15kHz Note4	-105		-105	
N_{oc} Note1	dBm/SCS Note3	-96		-96	
$\hat{E}_s / N_{oc}$	dB	4.54		2.66	
SS-RSRP Note2	dBm/SCS Note4	-91.46	-93.34	-99	-99
SS-SINR Note2	dB	0	-3.2	-4.76	-4.76
$\hat{E}_s / I_{ot}$	dB	0	-3.2	-4.76	-4.76
Io Note2	dBm/95.04 MHz Note4	-59.43		-64	
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					

Note 2:	SS-SINR, SSB_RP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	SS-SINR and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5:	As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6:	Void
Note 7:	Void
Note 8:	Void
Note 9:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.5.7.3.1.3 Test Requirements

clauseThe SS-SINR absolute measurement accuracy in test 1 shall be within the range Nominal SS-SINR+3B to Nominal SS-SINR -3dB and the SS-SINR measurement accuracy in test 2 shall be within the range Nominal SS-SINR +3.5dB to Nominal SS-SINR -3.5dB according to the requirements in clause 10.1.10.13.1. Nominal SS-SINR is the value shown in table A.5.7.3.1.2-3.

A.5.7.3.2 EN-DC Inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell

A.5.7.3.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.15.1.1 and 10.1.15.1.2 for inter-frequency measurement.

A.5.7.3.2.2 Test Parameters

In this test case the two NR cells (i.e., Cell 2 and Cell 3) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.5.7.3.2.2-1. Both absolute accuracy and relative accuracy requirements of SS-SINR inter-frequency measurement are tested by using test setup in Table A.5.7.3.2.2-2 and Table A.5.7.3.2.2-3. In all test cases, Cell 2 is the PSCell and Cell 3 is target cell. Cell 1 is the E-UTRA cell which specific test parameters for this test case are specified in Table A.3.7.2.1-1. The TCI status for Cell 1 is defined in Table A.3.16.2-1 and TRS configuration for Cell 1 is defined in Table A.3.17.2.1-1.

Table A.5.7.3.2.2-1: SS-SINR Inter frequency SS-SINR supported test configurations

Configuration	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.5.7.3.2.2-2: SS-SINR Inter frequency general test parameters

Parameter	Unit	Test 1		Test 2		Test 3	
		Cell 2	Cell 3	Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN		Freq1	freq2	freq1	Freq2	freq1	Freq2
Duplex mode		TDD		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		66		66		66	
Downlink initial BWP configuration		DLBWP.0.1					
Downlink dedicated BWP configuration		DLBWP.1.1					
Uplink initial BWP configuration		ULBWP.0.1					
Uplink dedicated BWP configuration		ULBWP.1.1					
DRX cycle configuration	ms	Not applicable					

TRS configuration		TRS.2.1 TDD					
TCI state		TCI.State.0					
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-	CR.3.1 TDD	-
OCNG Patterns		OP.1	OP.1	OP.1	OP.1	OP.1	OP.1
SMTC configuration		SMTC. 1 FR2	SMTC. 1 FR2	SMTC. 1 FR2	SMTC. 1 FR2	SMTC. 1 FR2	SMTC. 1 FR2
SSB configuration		SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120	120	120
EPRE ratio of PSS to SSS EPRE ratio of PBCH_DMRS to SSS EPRE ratio of PBCH to PBCH_DMRS EPRE ratio of PDCCH_DMRS to SSS EPRE ratio of PDCCH to PDCCH_DMRS EPRE ratio of PDSCH_DMRS to SSS EPRE ratio of PDSCH to PDSCH_DMRS EPRE ratio of OCNG DMRS to SSS Note 1 EPRE ratio of OCNG to OCNG DMRS Note 1	dB	0	0	0	0	0	0
Propagation conditions		AWGN	AWGN	AWGN	AWGN	AWGN	AWGN
Antenna configuration		1x2	1x2	1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Void Note 3: Void Note 4: Void							

Table A.5.7.3.2.2-3: SS-SINR Inter frequency OTA related test parameters

Parameter	Unit	Test 1		Test 2		Test 3	
		Cell 2	Cell 3	Cell 2	Cell 3	Cell 2	Cell 3
Angle of arrival configuration	degrees	Setup 1 according to A.3.15.1		Setup 1 according to A.3.15.1		Setup 1 according to A.3.15.1	
Assumption for UE beams Note 10		Rough		Rough		Rough	
N_{oc} Note1	dBm/15kHz Note4	-105	-105	-105	-105	-105	-105
N_{oc} Note1	dBm/SCS Note3	-96	-96	-96	-96	-96	-96
$\hat{E}_s / N_{oc}$	dB	-0.5		-0.5		11	
SS-RSRP Note2	dBm/SCS Note4	-96.5	-96.5	-85	-85	-99	-99
SS-SINR Note2	dB	-0.5	-0.5	11	11	-3.0	-3.0
$\hat{E}_s / I_{ot}$	dB	-0.5	-0.5	11	11	-3.0	-3.0
Io Note2	dBm/95.04 MHz Note4	-69.3		-55.4		-65.24	

Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2:	SS-SINR, SSB_RP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	SS-SINR and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5:	As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6:	Void
Note 7:	Void
Note 8:	Void
Note 9:	Void
Note 10:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.5.7.3.2.3 Test Requirements

The SS-SINR absolute measurement accuracy in test 1 shall be within the range Nominal SS-SINR+3dB to Nominal SS-SINR -3dB and the SS-SINR measurement accuracy in test 2 shall be within the range Nominal SS-SINR+3.5dB to Nominal SS-SINR -3.5dB according to the requirements in clause 10.1.15.1.1. Nominal SS-SINR is the value shown in table A.5.7.2.2.2-3

The SS-SINR relative measurement accuracy shall fulfil the requirements in clause 10.1.15.1.2.

A.5.7.4 L1-RSRP measurement for beam reporting

A.5.7.4.1 SSB based L1-RSRP measurement

A.5.7.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 9.5.2 and clause 10.1.20.1 for L1-RSRP measurements based on SSB with the testing configurations for NR cells in Table A.5.7.4.1.1-1.

The AoA setup for this test is Setup 1 as defined in clause A.3.15.

Table A.5.7.4.1.1-1: Applicable NR configurations for FR2 SSB based L1-RSRP test

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.5.7.4.1.2 Test parameters

In this set of test cases there are two cells in the test, E-UTRAN PCell (Cell 1), FR2 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.5.7.4.1.2-1 and Table A.5.7.4.1.2-2 below. The absolute and relative accuracy of L1-RSRP measurements are tested by using the parameters in Table A.5.7.4.1.2-1 and Table A.5.7.4.1.2-2.

There is no measurement gap configured in the test. Before the test, UE is configured one SSB resource set with two SSB resources. UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSB resources 0 and 1.

Table A.5.7.4.1.2-1: FR2 SSB based L1-RSRP general test parameters

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1~4		freq1	freq1
Duplex mode	1~4		TDD	TDD
TDD Configuration	1~4		TDDConf.3.1	TDDConf.3.1
$BW_{channel}$	1~4	MHz	100: $N_{RB,c}$ = 66	100: $N_{RB,c}$ = 66
Data RBs allocated	1~4		66	66
PDSCH Reference measurement channel	1.2		SR.3.2 TDD	SR.3.2 TDD
	3,4		SR.3.3 TDD	SR.3.3 TDD
RMSI CORESET Reference Channel	1,2		CR.3.1 TDD	CR.3.1 TDD
	3,4		CR.3.2 TDD	CR.3.2 TDD
Dedicated CORESET Reference Channel	1,2		CCR.3.1 TDD	CCR.3.1 TDD
	3,4		CCR.3.7 TDD	CCR.3.7 TDD
SSB configuration	1,2		SSB.1 FR2	SSB.1 FR2
	3,4		SSB.2 FR2	SSB.2 FR2
OCNG Patterns	1~4		OP.1	OP.1
Initial BWP Configuration	1~4		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~4		DLBWP.1.3 ULBWP.1.3	DLBWP.1.3 ULBWP.1.3
TRS Configuration	1~4		TRS.2.1 TDD	TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~4		TCI.State.2	TCI.State.2
SMTC configuration	1~4		SMTC.1	SMTC.1
reportConfigType	1~4		periodic	periodic
reportQuantity	1~4		ssb-Index-RSRP	ssb-Index-RSRP
Number of reported RS	1~4		2	2
L1-RSRP reporting period	1~4		slot320	slot320
Propagation condition	1~4		AWGN	AWGN
Antenna configuration			1x2	1x2
EPRE ratio of PSS to SSS	1~4	dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Table A.5.7.4.1.2-2: FR2 SSB based L1-RSRP OTA related test parameters

Parameter	Config	Unit	Test 1	Test 2 NOTE 3

			SSB0	SSB1	SSB0	SSB1
Angle of arrival configuration			Setup 1 according to A.3.15.1		Setup 1 according to A.3.15.1	
Assumption for UE beams[Note 4]			Rough		Rough	
N_{oc}	1~4	dBm/15 kHz	-100		n.a.	
N_{oc}	1,2	dBm/SSB SCS	-91		n.a.	
	3,4		-88		n.a.	
$\hat{E}_s / I_{ot}$	1~4	dB	10	-2	n.a.	
SSB_RP[Note1]	1,2	dBm/SCS	-81	-93	As in Table B.2.4-2	
	3,4		-78	-90	As in Table B.2.4-2	
Io[Note1]	1~4	dBm/ 95.04MHz	-51.57		SSB_RP+28.98	
$\hat{E}_s / N_{oc}$	1~4	dB	10	-2	n.a.	

Note 1: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 2: Void
Note 3: No additional noise is added by the test system in Test 2.
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.5.7.4.1.3 Test Requirements

After 320ms from the beginning of the test, the L1-RSRP measurement accuracy for SSB#0 and SSB#1 of Cell 2 shall fulfil the requirements in clauses 10.1.20.1. The following requirements are to be verified:

For Test 1:

Absolute accuracy of SSB0. The UE is deemed to meet the requirement if the reported L1-RSRP is in the range shown in Table A.5.7.4.1.3-1.

Relative accuracy of SSB0 compared with SSB1. The UE is deemed to meet the requirement if the difference in reported L1-RSRP meets the requirements in Table 10.1.20.1.2-1.

For Test 2:

Absolute accuracy of SSB resource reported by UE in L1-RSRP report (SSB0 or SSB1). The UE is deemed to meet the requirement if the reported L1-RSRP is in the range shown in Table A.5.7.4.1.3-1.

Relative accuracy of SSB0 compared with SSB1. The UE is deemed to meet the requirement if the difference in reported L1-RSRP meets the requirements in Table 10.1.20.1.2-1.

Table A.5.7.4.1.3-1: L1-RSRP absolute accuracy test requirement

	Test requirement [Notes1,2,3]
SSB0	$SSB_RP0 - \delta + G_{min} \le$ Reported RSRP(dBm) $\le SSB_RP0 + \delta + G_{max}$
SSB1	$SSB_RP1 - \delta + G_{min} \le$ Reported RSRP(dBm) $\le SSB_RP1 + \delta + G_{max}$

Note 1: SSB_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the SSB n under consideration
Note 2: δ is the RSRP absolute accuracy requirement from Table 10.1.20.1.1-1, selected according to the Io used in the test
Note 3: G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class

A.5.7.4.2 CSI-RS based L1-RSRP measurement on resource set with repetition off

A.5.7.4.2.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 9.5.3 and clause 10.1.20.2 for L1-RSRP measurements based on CSI-RS with the testing configurations for NR cells in Table A.5.7.4.2.1-1.

The AoA setup for this test is Setup 1 as defined in clause A.3.15.

Table A.5.7.4.2.1-1: Applicable NR configurations for FR2 CSI-RS based L1-RSRP test

Config	Description
1	LTE FDD, NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.5.7.4.2.2 Test parameters

In this set of test cases there are two cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.5.7.4.2.2-1 and Table A.5.7.4.2.2-2 below. The absolute and relative accuracy of L1-RSRP measurements are tested by using the parameters in Table A.5.7.4.2.2-1 and Table A.5.7.4.2.2-2.

There is no measurement gap configured in the test. Before the test, UE is configured one CSI-RS resource set with two CSI-RS resources. UE is configured to perform RLM and BFD based on SSB 0 and 1. CSI-RS is not transmitted in the same OFDM symbols as SSB.

Table A.5.7.4.2.2-1: FR2 CSI-RS based L1-RSRP general test parameters

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1~2		freq1	freq1
Duplex mode	1~2		TDD	TDD
TDD Configuration	1~2		TDDConf.3.1	TDDConf.3.1
$BW_{channel}$	1~2	MHz	100: $N_{RB,c}$ = 66	100: $N_{RB,c}$ = 66
PDSCH Reference measurement channel	1~2		SR.3.1 TDD	SR.3.1 TDD
RMSI CORESET Reference Channel	1~2		CR.3.1 TDD	CR.3.1 TDD
Dedicated CORESET Reference Channel	1~2		CCR.3.1 TDD	CCR.3.1 TDD
SSB configuration	1~2		SSB.1 FR2	SSB.1 FR2
OCNG Patterns	1~2		OP.1	OP.1
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~2		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
TRS Configuration	1~2		TRS.2.1 TDD	TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~2		TCI.State.2	TCI.State.2
SMTC configuration	1~2		SMTC.1	SMTC.1
CSI-RS	1~2		CSI-RS.3.2 TDD	CSI-RS.3.2 TDD
reportConfigType	1~2		periodic	periodic
reportQuantity	1~2		cri-RSRP	cri-RSRP
Number of reported RS	1~2		2	2
L1-RSRP reporting period	1~2		slot320	slot320
Propagation condition	1~2		AWGN	AWGN

Antenna configutaion	1~2		1x2	1x2
EPRE ratio of PSS to SSS	1~2	dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				

Table A.5.7.4.2.2-2: FR2 CSI-RS based L1-RSRP OTA related test parameters

Parameter	Config	Unit	Test 1		Test 2 NOTE 3	
			CSI-RS0	CSI-RS1	CSI-RS0	CSI-RS1
Angle of arrival configuration			Setup 1 according to A.3.15.1		Setup 1 according to A.3.15.1	
Assumption for UE beams Note 4			Rough		Rough	
N_{oc}	1~2	dBm/15 kHz	-100		n.a.	
N_{oc}	1~2	dBm/SSB SCS	-91		n.a. n.a.	
$\hat{E}_s / I_{ot}$	1~2	dB	10	-2	n.a.	
CSI-RS-RSRP Note1	1~2	dBm/SCS	-81	-93	As in Table B.2.4-2	
Io Note1	1~2	dBm/95.04MHz	-59.86		SS-RSRP+28.98	
$\hat{E}_s / N_{oc}$	1~2	dB	-51.57	-2	n.a.	
Note 1: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 2: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 3: No additional noise is added by the test system in Test 2. Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						

A.5.7.4.2.3 Test Requirements

After 320ms from the beginning of the test, the L1-RSRP measurement accuracy for CSI-RS#0 and CSI-RS#1 of Cell 2 shall fulfil the requirements in clauses 10.1.20.2. The following requirements are to be verified:

For Test 1:

Absolute accuracy of CSI-RS0. The UE is deemed to meet the requirement if the reported L1-RSRP is in the range shown in Table A.5.7.4.2.3-1.

Relative accuracy of CSI-RS0 compared with CSI-RS1. The UE is deemed to meet the requirement if the difference in reported L1-RSRP meets the requirements in Table 10.1.20.2.2-1.

For Test 2:

Absolute accuracy of CSI-RS resource reported by UE in L1-RSRP report (CSI-RS0 or CSI-RS1). The UE is deemed to meet the requirement if the reported L1-RSRP is in the range shown in Table A.5.7.4.2.3-1.

Relative accuracy of CSI-RS0 compared with CSI-RS1. The UE is deemed to meet the requirement if the difference in reported L1-RSRP meets the requirements in Table 10.1.20.2.2-1.

Table A.5.7.4.2.3-1: L1-RSRP absolute accuracy test requirement

	Test requirement Notes1,2,3
CSI-RS0	CSI-RS _RP0 -δ + G_{min} ≤ Reported RSRP(dBm) ≤CSI-RS _RP0 +δ + G_{max}
CSI-RS1	CSI-RS _RP1 -δ + G_{min} ≤ Reported RSRP(dBm) ≤CSI-RS _RP1 +δ + G_{max}
Note 1: CSI-RS_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the CSI-RS n under consideration	
Note 2: δ is the RSRP absolute accuracy requirement from Table 10.1.20.2.1-1, selected according to the Io used in the test	
Note 3: G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class	

A.5.7.5 CLI measurements

A.5.7.5.1 EN-DC SRS-RSRP measurement accuracy with FR2 serving cell

A.5.7.5.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SRS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 10.1.22.1.1 with the testing configurations for NR cells in Table A.5.7.5.1.1-1.

Table A.5.7.5.1.1-1: Applicable NR configurations for FR2 SRS-RSRP accuracy test

Config	Description
1	LTE FDD, NR 120 kHz SRS SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SRS SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.5.7.5.1.2 Test parameters

In this set of test cases there are two cells in the test, E-UTRAN PCell (Cell 1), FR2 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.5.7.5.1.2-1 and A.5.7.5.1.2-2 below. The test parameter for the (virtual) neighbor cell UE transmitting SRS are given in Table A.5.7.5.1.2-2.

Before the test UE is configured to perform SRS-RSRP measurement. During the test, the test system transmits SRS resources for measurement in the DL slots according to the SRS configuration in Table A.5.7.5.1.2-3. There is no measurement gap configured in the test. During the test, the test system does not transmit PDCCH/PDSCH/OCNG on SRS symbol to be transmitted and on 2 data symbols before SRS to be transmitted.

Table A.5.7.5.1.2-1: FR2 test parameters for SRS-RSRP accuracy

Parameter	Config	Unit	Test 1	Test 2

SSB GSCN	1~2		freq1	freq1
Duplex mode	1~2		TDD	TDD
TDD configuration	1~2		TDDConf.3.1	TDDConf.3.1
$BW_{channel}$	1~2	MHz	100: $N_{RB,c}$ = 66	100: $N_{RB,c}$ = 66
PDSCH Reference measurement channel	1~2		SR.3.1 TDD	SR.3.1 TDD
RMSI CORESET Reference Channel	1~2		CR.3.1 TDD	CR.3.1 TDD
Dedicated CORESET Reference Channel	1~2		CCR.3.1 TDD	CCR.3.1 TDD
SSB configuration	1~2		SSB.3 FR2	SSB.3 FR2
OCNG Patterns	1~2		OP.1	OP.1
TRS configuration	1~2		TRS.2.1 TDD	TRS.2.1 TDD
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~2		DLBWP.1.3 ULBWP.1.3	DLBWP.1.3 ULBWP.1.3
SMTC configuration	1~2		SMTC.1	SMTC.1
Time offset between DL from serving cell and SRS from test system	1~2	μs	10.76	10.67
EPRE ratio of PSS to SSS	1~2	dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
Propagation condition	1~2		AWGN	AWGN
Antenna configuration	1~2		1x2	1x2
SRS configuration	1~2		SRSConf.1	SRSConf.1
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.				

Table A.5.7.5.1.2-2: SRS-RSRP accuracy OTA related test parameters for PSCell and Neighbour cell UE in FR2

Parameter	Unit	T1	T2
Angle of arrival configuration		Setup 1 defined A.3.15.1	Setup 1 defined A.3.15.1
Beam assumption Note 5		Fine	Fine
N_{oc} Note1	dBm/15kHz Note3	-100	N/A
N_{oc} Note1	dBm/SCS Note3	-91	N/A
$\hat{E}_s / N_{oc}$	dB	2	N/A
E_s	dBm/SCS Note3		(Table B.2.7-2 Rx Beam Peak)
SRS_RP Note2	dBm/SCS	-89	(Table B.2.7-2 Rx Beam Peak)
$\hat{E}_s / I_{ot\ BB}$ Note4	dB	>1	1

Io[Note2]	dBm/95.04 MHz [Note3]	-57.89	(Table B.2.7-2 Rx Beam Peak +50.79dB)

Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 2: SRS_RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 3: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone

Note 4: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 2dB for UE multi-band relaxation factor $\sum MB_P$ from TS 38.101-2 [19] Table 6.2.1.3-4.

Note 5: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.

Table A.5.7.5.1.2-3: SRS configuration parameters for FR2 SRS-RSRP accuracy

	Field	SRSConf.1
SRS-ResourceSet	srs-ResourceSetId	0
	srs-ResourceIdList	0
	resourceType	Periodic
	Usage	Codebook
SRS-Resource	SRS-ResourceId	0
	nrofSRS-Ports	Port1
	transmissionComb	n2
	combOffset-n2	0
	cyclicShift-n2	0
	resourceMapping startPosition	0
	resourceMapping nrofSymbols	n1
	resourceMapping repetitionFactor	n1
	freqDomainPosition	0
	freqDomainShift	0
	freqHopping c-SRS	12
	freqHopping b-SRS	0
	freqHopping b-hop	0
	groupOrSequenceHopping	Neither
	resourceType	Periodic
	periodicityAndOffset-p	sl160,25
	sequenceId	0

A.5.7.5.1.3 Test Requirements

The SRS-RSRP measurement accuracy shall fulfil the absolute accuracy requirements in clauses 10.1.22.1.1. The following requirements are to be verified:

During T1:

The UE is deemed to meet the requirement if the reported SRS-RSRP is in the range shown in table A.5.7.5.1.3-1.

During T2:

The UE is deemed to meet the requirement if the reported SRS-RSRP is in the range shown in table A.5.7.5.1.3-1.

Table A.5.7.5.1.3-1: SRS-RSRP absolute accuracy test requirement

	Test requirement Notes1,2,3
SRS	SRS_RP -δ +G_{min} ≤ Reported SRS-RSRP(dBm) ≤SRS_RP +δ +G_{max}
Note 1:	SRS_RP is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test
Note 2:	δ is the RSRP absolute accuracy requirement from Table 10.1.22.1.1-2, selected according to the Io used in the test
Note 3:	G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class

A.5.7.5.2 EN-DC CLI-RSSI measurement accuracy with FR2 serving cell

A.5.7.5.2.1 Test Purpose and Environment

The purpose of this test is to verify that the CLI-RSSI measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 10.1.22.2.1 with the testing configurations for NR cells in Table A.5.7.5.2.1-1.

Table A.5.7.5.2.1-1: Applicable NR configurations for FR2 CLI-RSSI accuracy test

Config	Description
1	LTE FDD, NR 120 kHz SRS SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SRS SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.5.7.5.2.2 Test parameters

In this set of test cases there are two cells in the test, E-UTRAN PCell (Cell 1), FR2 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.5.7.5.2.2-1 and A.5.7.5.2.2-2 below.

Before the test UE is configured to perform CLI-RSSI measurement. There is no measurement gap configured in the test. During the test, the test system does not transmit PDCCH/PDSCH/OCNG on symbols for CLI-RSSI resource and on 2 data symbol before. The CLI-RSSI measurement resource configuration is in Table A.5.7.5.2.2-3.

Table A.5.7.5.2.2-1: FR2 test parameters for CLI-RSSI accuracy

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1~2		freq1	freq1
Duplex mode	1~2		TDD	TDD
TDD configuration	1~2		TDDConf.3.1	TDDConf.3.1
$BW_{channel}$	1~2	MHz	100: $N_{RB,c}$ = 66	100: $N_{RB,c}$ = 66
PDSCH Reference measurement channel	1~2		SR.3.1 TDD	SR.3.1 TDD
RMSI CORESET Reference Channel	1~2		CR.3.1 TDD	CR.3.1 TDD
Dedicated CORESET Reference Channel	1~2		CCR.3.1 TDD	CCR.3.1 TDD
SSB configuration	1~2		SSB.3 FR2	SSB.3 FR2
OCNG Patterns Note2	1~2		OP.1	OP.1
TRS configuration	1~2		TRS.2.1 TDD	TRS.2.1 TDD
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1

Dedicated BWP configuration	1~2		DLBWP.1.3 ULBWP.1.3	DLBWP.1.3 ULBWP.1.3
SMTC configuration	1~2		SMTC.1	SMTC.1
Time offset between DL from serving cell and OCNG from test system	1~2	μs	10.67	10.67
EPRE ratio of PSS to SSS	1~2	dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
Propagation condition	1~2		AWGN	AWGN
Antenna configuration	1~2		1x2	1x2
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: OCNG is not transmitted in the CLI-RSSI measurement resources.				

Table A.5.7.5.2.2-2: CLI-RSSI accuracy OTA related test parameters

Parameter	Unit	T1	T2
Angle of arrival configuration		Setup 1 defined A.3.15.1	
Beam assumption Note 5		Fine	
N_{oc} on CLI-RSSI measurement resource Note1	dBm/15kHz Note3	-100	
N_{oc} on CLI-RSSI measurement resource Note1	dBm/SCS Note3	-91	
$\hat{E}_s / N_{oc}$ on CLI-RSSI measurement resource	dB	-Infinity	
RSRP on CLI-RSSI measurement resource Note2	dBm/SCS	-Infinity	
$\hat{E}_s / I_{ot}$ BB on CLI-RSSI measurement resource Note4	dB	-Infinity	
Io on CLI-RSSI measurement resource Note2	dBm/95.04 MHz Note3	-62.01	
Io on CLI-RSSI measurement resource Note2	dBm/1.08 MHz	-81.46	
Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: SRS_RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone			

Note 4:	Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 2dB for UE multi-band relaxation factor $\sum MB_P$ from TS 38.101-2 [19] Table 6.2.1.3-4.
Note 5:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.

Table A.5.7.5.2.2-3: CLI-RSSI measurement resource configuration for FR2 CLI-RSSI accuracy

	Field	SRSConf.1
CLI-RSSI measurement resource	rssi-ResourceId	0
	rssi-SCS	120kHz
	startPRB	0
	nrofPRBs	66
	startPosition	3
	nrofSymbols	11
	rssi-PeriodicityAndOffset	sl160, 25

A.5.7.5.2.3 Test Requirements

The CLI-RSSI measurement accuracy shall fulfil the absolute accuracy requirements in clauses 10.1.22.2.1. The following requirements are to be verified:

During T1:

The UE is deemed to meet the requirement if the reported CLI-RSSI is in the range shown in table A.5.7.5.2.3-1.

During T2:

The UE is deemed to meet the requirement if the reported CLI-RSSI is in the range shown in table A.5.7.5.2.3-1..

Table A.5.7.5.2.3-1: CLI-RSSI absolute accuracy test requirement

	Test requirement Notes1,2,3
	Io -δ +G_{min} ≤ Reported CLI-RSSI(dBm) ≤Io +δ +G_{max}
Note 1:	Io is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for 1.08MHz
Note 2:	δ is the RSRP absolute accuracy requirement from Table 10.1.22.1.1-2, selected according to the Io used in the test
Note 3:	G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class

A.5.7.6 L1-SINR measurement for beam reporting

A.5.7.6.1 L1-SINR measurement with CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off

A.5.7.6.1.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-SINR measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 9.8.4.1 and clause 10.1.28.1 for FR2 L1-SINR measurements based on CSI-RS with the testing configurations for NR cells in Table A.5.7.6.1.1-1, which configures the measurement resources for the CSI-RS based CMR and no dedicated IMR.

The AoA setup for this test is Setup 1 as defined in clause A.3.15.

Table A.5.7.6.1.1-1: Applicable NR configurations for FR2 L1-SINR test with CSI-RS based CMR and no dedicated IMR configured

Config	Description
1	LTE FDD, NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.5.7.6.1.2 Test parameters

In this set of test cases there are two cells in the test, E-UTRAN PCell (Cell 1), FR2 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.5.7.6.1.2-1 and Table A.5.7.6.1.2-2 below. The absolute and relative accuracy of L1-SINR measurements are tested by using the parameters in Table A.5.7.6.1.2-1 and Table A.5.7.6.1.2-2.

There is no measurement gap configured in the test. Before the test, UE is configured one CSI-RS resource set with two CSI-RS resources. UE is configured to perform RLM and BFD based on SSB 0 and 1. CSI-RS is not transmitted in the same OFDM symbols as SSB.

Table A.5.7.6.1.2-1: FR2 CSI-RS based L1-SINR general test parameters

Parameter	Config	Unit	Test 1
SSB GSCN	1~2		freq1
Duplex mode	1~2		TDD
TDD Configuration	1~2		TDDConf.3.1
$BW_{channel}$	1~2	MHz	100: $N_{RB,c}$ = 66
PDSCH Reference measurement channel	1~2		SR.3.1 TDD
RMSI CORESET Reference Channel	1~2		CR.3.1 TDD
Dedicated CORESET Reference Channel	1~2		CCR.3.1 TDD
SSB configuration	1~2		SSB.1 FR2
OCNG Patterns	1~2		OP.1
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~2		DLBWP.1.1 ULBWP.1.1
TRS Configuration	1~2		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~2		TCI.State.2
SMTC configuration	1~2		SMTC.1
CSI-RS	1~2		CSI-RS.3.2 TDD
reportConfigType	1~2		periodic
reportQuantity-r16	1~2		cri-SINR-r16
nrofReportedRS	1~2		2
L1-SINR reporting period	1~2		slot640
Propagation condition	1~2		AWGN
Antenna configuration	1~2		1x2
EPRE ratio of PSS to SSS	1~2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			

EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			

Table A.5.7.6.1.2-2: FR2 CSI-RS based L1-SINR OTA related test parameters

Parameter	Config	Unit	Test 1	
			CSI-RS0	CSI-RS1
Angle of arrival configuration			Setup 1 according to A.3.15.1	
Assumption for UE beams Note 4			Rough	
N_{oc}	1~2	dBm/15 kHz	-100	
N_{oc}	1~2	dBm/SSB SCS	-91	
$\hat{E}_s / I_{ot}$	1~2	dB	10	-2
CSI-RS-RSRP Note1	1~2	dBm/SCS	-81	-93
Io Note1	1~2	dBm/95.04MHz	-51.57	-59.86
$\hat{E}_s / N_{oc}$	1~2	dB	10	-2
Note 1: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 2: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 3: Void. Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.5.7.6.1.3 Test Requirements

After 640ms from the beginning of the test, the L1-SINR measurement accuracy for CSI-RS#0 and CSI-RS#1 of Cell 2 shall fulfil the requirements in clauses 10.1.28.1. The following requirements are to be verified:

For Test 1:

Absolute accuracy of CSI-RS0. The UE is deemed to meet the requirement if the reported L1-SINR is in the range shown in Table A.5.7.6.1.3-1.

Relative accuracy of CSI-RS0 compared with CSI-RS1. The UE is deemed to meet the requirement if the reported differential L1-SINR meets is in the range shown in Table A.5.7.6.1.3-2.

Table A.5.7.6.1.3-1: L1-SINR absolute accuracy test requirement

	Test requirement Notes1,2
CSI-RS0	L1-SINR0-δ≤ Reported SINR(dB) ≤L1-SINR0+δ
Note 1: L1-SINR0 is the equivalent SINR received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the CSI-RS 0 under consideration	
Note 2: δ is the SINR absolute accuracy requirement from Table 10.1.28.1.1-1, selected according to the Io used in the test	

Table A.5.7.6.1.3-2: L1-SINR relative accuracy test requirement

	Test requirement Notes1,2
CSI-RS0 - CSI-RS1	L1-SINR0 - L1-SINR1 - σ ≤ Reported DIFFSINR (dB) ≤ L1-SINR0 - L1-SINR1 + σ
Note 1: L1-SINRn is the equivalent SINR received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the CSI-RS n under consideration	
Note 2: σ is the SINR relative requirement from Table 10.1.28.1.2-1, selected according to the Io used in the test	

A.5.7.6.2 L1-SINR measurement with SSB based CMR and dedicated IMR

A.5.7.6.2.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-SINR measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 9.8.4.2 and clause 10.1.28.2 for L1-SINR measurements with SSB based CMR and dedicated CSI-RS based IMR, with the testing configurations for NR cells in Table A.5.7.6.2.1-1.

The AoA setup for this test is Setup 1 as defined in clause A.3.15.

Table A.5.7.6.2.1-1: Applicable NR configurations for FR2 L1-SINR measurement test with SSB based CMR and CSI-RS based IMR

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.5.7.6.2.2 Test parameters

In this set of test cases there are two cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.5.7.6.2.2-1 and Table A.5.7.6.2.2-2 below. The absolute accuracy of L1-SINR measurements are tested by using the parameters in Table A.5.7.6.2.2-1 and Table A.5.7.6.2.2-2.

There is no measurement gap configured in the test. Before the test, UE is configured one SSB resource set with two SSB resources and one CSI-RS resource set with two CSI-RS resource. UE is configured to perform RLM and BFD measurement based on the SSB resources 0 and 1. UE is configured to perform L1-SINR measurement based on the SSBs as CMR and the CSI-RS resources as IMR.

Table A.5.7.6.2.2-1: FR2 L1-SINR measurement test parameters with SSB based CMR and CSI-RS based IMR

Parameter	Config	Unit	Test 1
SSB GSCN	1~4		freq1
Duplex mode	1~4		TDD

TDD Configuration	1~4		TDDConf.3.1
$BW_{channel}$	1~4	MHz	100: $N_{RB,c}$ = 66
PDSCH Reference measurement channel	1~4		SR.3.1 TDD
RMSI CORESET Reference Channel	1~4		CR.3.1 TDD
Dedicated CORESET Reference Channel	1~4		CCR.3.1 TDD
SSB configuration	1,2		SSB.1 FR2
	3,4		SSB.2 FR2
CSI-RS configuration	1~4		CSI-RS 3.1A TDD
OCNG Patterns	1~4		OP.1
Initial BWP Configuration	1~4		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~4		DLBWP.1.3 ULBWP.1.3
TRS Configuration	1~4		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~4		TCI.State.2
SMTC configuration	1~4		SMTC.1
reportConfigType	1~4		periodic
reportQuantity-r16	1~4		ssb-Index-SINR-r16
Number of reported RS	1~4		2
L1-SINR reporting period	1~4		slot640
Propagation condition	1~4		AWGN
Antenna configuration	1~4		1x2
EPRE ratio of PSS to SSS	1~4	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			

Table A.5.7.6.2.2-2: FR2 SSB specific test parameters

Parameter	Config	Unit	Test 1	
			SSB#0	SSB#1
Angle of arrival configuration			Setup 1 according to A.3.15.1	
Assumption for UE beams Note 4			Rough	
N_{oc}	1~4	dBm/15 kHz	-100	
	1,2		-91	

N_{oc}	3,4	dBm/SSB SCS	-88	
$\hat{E}_s / I_{ot}$	1~4	dB	10	0
SSB RSRP[Note1]	1,2	dBm/SCS	-81	-91
	3,4		-78	-88
Io[Note1]	1~4	dBm/ 95.04MHz	-51.57	-58.97
$\hat{E}_s / N_{oc}$	1~4	dB	10	0
Note 1: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 2: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 3: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

Table A.5.7.6.2.2-3: FR2 CSI-RS specific test parameters

Parameter	Config	Unit	Test 1	
			CSI-RS#0	CSI-RS#1
Angle of arrival configuration			Setup 1 according to A.3.15.1	
Assumption for UE beams[Note 4]			Rough	
N_{oc}	1~4	dBm/15kHz	-100	
N_{oc}	1~4	dBm/CSI-RS SCS	-91	
$\hat{E}_s / I_{ot}$	1~4	dB	10	0
CSI-RS RSRP[Note1]	1~4	dBm/SCS	-81	-91
Io[Note1]	1~4	dBm/ 95.04MHz	-51.57	-58.97
$\hat{E}_s / N_{oc}$	1~4	dB	10	0
Note 1: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 2: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 3: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.5.7.6.2.3 Test Requirements

After 640ms from the beginning of the test, the L1-SINR measurement accuracy for SSB#0+CSI-RS#0 and SSB#1+CSI-RS#1 of Cell 2 shall fulfil the requirements in clauses 10.1.28.2. The following requirements are to be verified:

For Test 1:

Absolute accuracy of SSB#0+CSI-RS#0. The UE is deemed to meet the requirement if the reported L1-SINR is in the range shown in Table A.5.7.6.2.3-1.

Relative accuracy of SSB#0+CSI-RS#0 compared with SSB#1+CSI-RS#1. The UE is deemed to meet the requirement if the reported differential L1-SINR is in the range shown in Table A.5.7.6.2.3-2.

Table A.5.7.6.2.3-1: L1-SINR absolute accuracy test requirement

	Test requirement [Notes1,2]
SSB#0+CSI-RS#0	L1_SINR0 -δ + ≤ Reported SINR (dB) ≤ L1_SINR 0 +δ

Note 1:	L1_SINR0 is the equivalent SINR received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the SSB#0+CSI-RS#0 under consideration
Note 2:	δ is the SINR absolute accuracy requirement from Table 10.1.28.2.1-1, selected according to the Io used in the test

Table A.5.7.6.2.3-2: L1-SINR relative accuracy test requirement

	Test requirement Notes1,2
SSB#0+CSI-RS#0 - SSB#1+CSI-RS#1	L1-SINR0 - L1-SINR1 - σ ≤ Reported DIFFSINR (dB) ≤ L1-SINR0 - L1-SINR1 + σ
Note 1:	L1-SINRn is the equivalent SINR received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the SSB#n+CSI-RS#n under consideration
Note 2:	σ is the SINR relative requirement from Table 10.1.28.2.2-1, selected according to the Io used in the test

A.5.7.6.3 L1-SINR measurement with CSI-RS based CMR and dedicated IMR

A.5.7.6.3.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-SINR measurement accuracy is within the specified limits. This test will partly verify the requirements in Clauses 9.8.4.3 and clause 10.1.28.3 for L1-SINR measurements based on CSI-RS as CMR and CSI-IM as IMR with the testing configurations for NR cells in Table A.5.7.6.3.1-1.

The AoA setup for this test is Setup 1 as defined in clause A.3.15.

Table A.5.7.6.3.1-1: Applicable NR configurations for FR2 L1-SINR measurement test with CSI-RS based CMR and CSI-IM based IMR

Config	Description
1	LTE FDD, NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.5.7.6.3.2 Test parameters

In this set of test cases there are two cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.5.7.6.3.2-1 and A.5.7.6.3.2-2 below. The absolute and relative accuracy of L1-SINR measurements are tested by using the parameters in Table A.5.7.6.3.2-1 and A.5.7.6.3.2-2.

There is no measurement gap configured in the test. Before the test, UE is configured one CSI-RS resource set with two CSI-RS resources and one CSI-IM resource set with two CSI-IM resources. UE is configured to perform RLM and BFD based on SSB 0 and 1. CSI-RS is not transmitted in the same OFDM symbols as SSB. UE is configured to perform L1-SINR measurement based on the configured CSI-RS as CMR and CSI-IM as IMR.

Table A.5.7.6.3.2-1: FR2 L1-SINR measurement test with CSI-RS based CMR and CSI-IM based IMR

Parameter	Config	Unit	Test 1
SSB GSCN	1~2		freq1
Duplex mode	1~2		TDD
TDD Configuration	1~2		TDDConf.3.1
$BW_{channel}$	1~2	MHz	100: $N_{RB,c}$ = 66
PDSCH Reference measurement channel	1~2		SR.3.1 TDD
RMSI CORESET Reference Channel	1~2		CR.3.1 TDD

Dedicated CORESET Reference Channel	1~2		CCR.3.1 TDD
SSB configuration	1~2		SSB.1 FR2
OCNG Patterns	1~2		OP.1
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~2		DLBWP.1.1 ULBWP.1.1
TRS Configuration	1~2		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~2		TCI.State.2
SMTC configuration	1~2		SMTC.1
CSI-RS configuration as CMR	1~2		CSI-RS.3.2 TDD
CSI-IM configuration as IMR	1~2		CSI-IM.3.3 TDD
reportConfigType	1~2		periodic
reportQuantity-r16	1~2		cri-SINR-r16
nrofReportedRS	1~2		2
L1-SINR reporting period	1~2		slot640
Propagation condition	1~2		AWGN
Antenna configutaion	1~2		1x2
EPRE ratio of PSS to SSS	1~2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			

Table A.5.7.6.3.2-2: FR2 CSI-RS based L1-SINR measurement OTA related test parameters

Parameter	Config	Unit	Test 1	
			CSI-RS0	CSI-RS1
Angle of arrival configuration			Setup 1 according to A.3.15.1	
Assumption for UE beams Note 4			Rough	
N_{oc}	1~2	dBm/15 kHz	-100	
N_{oc}	1~2	dBm/SSB SCS	-91	
$\hat{E}_s/I_{ot}$	1~2	dB	10	-2
CSI-RS-RSRP Note1	1~2	dBm/SCS	-81	-93

Io[Note1]	1~2	dBm/ 95.04MHz	-51.57	-59.86
$\hat{E}_s / N_{oc}$	1~2	dB	10	-2
Note 1: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 2: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 3: No additional noise is added by the test system in Test 2. Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.5.7.6.3.3 Test Requirements

After 640ms from the beginning of the test, the L1-SINR measurement accuracy for CSI-RS#0+CSI-IM#0 and CSI-RS#1+CSI-IM#1 of Cell 2 shall fulfil the requirements in clauses 10.1.28.3. The following requirements are to be verified:

Absolute accuracy of CSI-RS#0+CSI-IM#0. The UE is deemed to meet the requirement if the reported L1-SINR is in the range shown in Table A.5.7.6.3.3-1.

Relative accuracy of CSI-RS#0+CSI-IM#0 compared with CSI-RS#1+CSI-IM#1. The UE is deemed to meet the requirement if the reported differential L1-SINR is in the range shown in Table A.5.7.6.3.3-2.

Table A.5.7.6.3.3-1: L1-SINR absolute accuracy test requirement

	Test requirement [Notes1,2]
CSI-RS#0+CSI-IM#0	L1-SINR0 -δ≤ Reported SINR(dBm) ≤L1-SINR 0 +δ
Note 1: L1-SINR0 is the equivalent SINR received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the CSI-RS#0 under consideration Note 2: δ is the SINR absolute accuracy requirement from Table 10.1.28.3.1-2.	

Table A.5.7.6.3.3-2: L1-SINR relative accuracy test requirement

	Test requirement [Notes1,2]
CSI-RS#0+CSI-IM#0 - CSI-RS#1+CSI-IM#1	L1-SINR0 - L1-SINR1 - σ≤ Reported DIFFSINR (dB) ≤ L1-SINR0 - L1-SINR1 + σ
Note 1: L1-SINRn is the equivalent SINR received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the CSI-RS#n+CSI-IM#n under consideration Note 2: σ is the SINR relative requirement from Table 10.1.28.3.2-2, selected according to the Io used in the test	

A.5.7.7 CSI-RSRP

A.5.7.7.1 EN-DC intra-frequency case measurement accuracy with FR2 serving cell and FR2 target cell

A.5.7.7.1.1 Test Purpose and Environment

The purpose of this test is to verify that the CSI-RS based RSRP measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 10.1.3.1.1 and 10.1.3.1.2 for intra-frequency measurements.

A.5.7.7.1.2 Test parameters

In this set of test cases, all NR cells are on the same carrier frequency. Supported test configurations are shown in Table A.5.7.7.1.2-1. Both absolute and relative accuracy of SS-RSRP intra-frequency measurements are tested by

using the parameters in Table A.5.7.7.1.2-2 and A.5.7.7.1.2-3. The E-UTRA PCell is configured as specified in clause A.3.7.2.2. In all test cases, cell 1 is the PCell, cell 2 is the PSCell and cell 3 is the target cell. The test consists of two time phases T1 and T2.

Table A.5.7.7.1.2-1: SS-RSRP Intra frequency SS-RSRP supported test configurations

Configuration	Description
1	FDD LTE PCell, Cell 2&3 120 kHz SSB SCS, 120KHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
2	TDD LTE PCell, Cell 2&3 120 kHz SSB SCS, 120KHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations	

Table A.5.7.7.1.2-2: CSI-RSRP Intra frequency general test parameters

Parameter[Note 5]	Unit	T1		T2	
		Cell 2	Cell 3	Cell 2	Cell 3
Physical cell ID		489	0	489	0
SSB ARFCN		freq1		freq1	
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-
Dedicated CORESET Reference Channel		CCR.3.1 TDD	-	CCR.3.1 TDD	-
OCNG Patterns		OP.3	OP.3	OP.3	OP.3
SSB configuration		SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
SMTC configuration		SMTC.1	SMTC.1	SMTC.1	SMTC.1
CSI-RS configuration for RRM		CSI-RS.RRM.FR2.1 TDD	CSI-RS.RRM.FR2.1 TDD	CSI-RS.RRM.FR2.1 TDD	CSI-RS.RRM.FR2.1 TDD
Time offset with Cell 2	µs	-	0.58	-	0.58
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS[Note 1]					
EPRE ratio of OCNG to OCNG DMRS[Note 1]					
Propagation conditions		AWGN	AWGN	AWGN	AWGN
Antenna configuration		1x2	1x2	1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: Void
Note 4: Void
Note 5: All parameters apply for configuration 1 and 2

Note 6: Void

Table A.5.7.7.1.2-3: CSI-RSRP Intra frequency OTA related test parameters

Parameter	Unit	T1		T2	
		Cell 2	Cell 3	Cell 2	Cell 3
Angle of arrival configuration		Setup 1 according to clause A.3.15.1			
Assumption for UE beams Note 8		Rough			
N_{oc} Note1	dBm/15kHz Note4	-91.6		N/A	
N_{oc} Note1	dBm/SCS Note4	-82.6		N/A	
$\hat{E}_s / N_{oc}$	dB	6.0	1.0	N/A	N/A
E_s	dBm/SCS Note4			(Table B.2.2-2 Rx Beam Peak +2.1dB)	(Table B.2.2-2 Rx Beam Peak +2.1dB)
SSB_RP Note2	dBm/SCS	-76.6	-81.6	(Table B.2.2-2 Rx Beam Peak +2.1dB)	(Table B.2.2-2 Rx Beam Peak +2.1dB)
$\hat{E}_s / I_{ot\ BB}$ Note6	dB	2.44	-5.98	-5.98	-5.98
CSI_RP	dBm/SCS	-76.6	-81.6	(Table B.2.2-2 Rx Beam Peak +2.1dB)	(Table B.2.2-2 Rx Beam Peak +2.1dB)
Io Note2	dBm/95.04 MHz Note4	-50.05		(Table B.2.2-2 Rx Beam Peak +29.70dB)	

Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SSB_RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: Void
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5: Void
Note 6: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.
Note 7: All parameters apply for configurations 1 and 2
Note 8: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.5.7.7.1.3 Test Requirements

The CSI-RSRP measurement accuracy shall fulfil the absolute accuracy requirements in clauses 10.1.3.1.1 and relative accuracy requirements in clause 10.1.3.1.2. The following requirements are to be verified:

During T1:

- Absolute accuracy of Cell 2 and absolute accuracy of Cell 3. The UE is deemed to meet the requirement if the reported CSI-RSRP is in the range shown in table A.5.7.6.1.3-1.

- Relative accuracy of Cell 3 compared with Cell 2. The UE is deemed to meet the requirement if the difference in reported CSI-RSRP meets the requirements in Table 10.1.3.1.2-1.

During T2:

- Absolute accuracy of Cell 2 and absolute accuracy of Cell 3. The UE is deemed to meet the requirement if the reported CSI-RSRP is in the range shown in table A.5.7.6.1.3-1.

- Relative accuracy of Cell 3 compared with Cell 2. The UE is deemed to meet the requirement if the difference in reported CSI-RSRP meets the requirements in Table 10.1.3.1.2-1.

During T1 and T2:

- Relative accuracy of Cell 2 during T2 compared with Cell 2 during T1. The UE is deemed to meet the requirement if the difference in reported CSI-RSRP meets the requirements in Table 10.1.3.1.2-1

- Relative accuracy of Cell 3 during T2 compared with Cell 3 during T1. The UE is deemed to meet the requirement if the difference in reported CSI -RSRP meets the requirements in Table 10.1.3.1.2-1.

Table A.5.7.7.1.3-1: CSI-RSRP absolute accuracy test requirement

	Test requirement Notes1,2,3
Cell 2	CSI_RP2 -δ +G_{min} ≤ Reported RSRP(dBm) ≤ CSI_RP2 +δ +G_{max}
Cell 3	CSI_RP3 -δ +G_{min} ≤ Reported RSRP(dBm) ≤ CSI_RP3 +δ +G_{max}
Note 1:	CSI_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration
Note 2:	δ is the RSRP absolute accuracy requirement from Table 10.1.3.1.1-1, selected according to the Io used in the test
Note 3:	G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class

A.5.7.7.2 EN-DC inter-frequency case measurement accuracy with FR2 serving cell and FR2 target cell

A.5.7.7.2.1 Test Purpose and Environment

The purpose of this test is to verify that the CSI-RS based RSRP measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 10.1.5.3.1 and 10.1.5.3.2 for inter-frequency measurements with the testing configurations for NR cells in Table A.5.7.7.2.1-1.

Table A.5.7.7.2.1-1: Applicable NR configurations for FR2 inter-frequency CSI-RSRP accuracy test

Configuration	Description
1	FDD LTE PCell, cells 2&3 120 kHz SSB SCS, 120KHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
2	TDD LTE PCell, cells 2&3 120 kHz SSB SCS, 120KHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode

A.5.7.7.2.2 Test parameters

In this set of test cases, there are three cells in the test, E-UTRAN PCell (Cell 1), FR2 PSCell (Cell 2) and a FR2 neighbour cell (Cell 3) on a different frequency than the PSCell. The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 and Cell 3 are given in Table A.5.7.7.2.2-1 and Table

A.5.7.7.2.2-2 below. Both absolute and relative accuracy of RSRP intrer-frequency measurements are tested by using the parameters in Table A.5.7.7.2.2-1 and Table A.5.7.7.2.2-2. The inter-frequency measurements are supported by a measurement gap.

Table A.5.7.7.2.2-1: CSI-RSRP inter-frequency general test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 2	Cell 3	Cell 2	Cell 3
Physical cell ID			489	0	489	0
SSB ARFCN	1,2		freq1	freq2	freq1	freq2
$BW_{channel}$	1,2		100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Gap pattern ID			0		0	
Duplex mode	1,2		TDD	TDD	TDD	TDD
TDD configuration	1,2		TDDConf.3.1		TDDConf.3.1	
PDSCH Reference measurement channel	1,2		SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel	1,2		CR.3.1 TDD	-	CR.3.1 TDD	-
Dedicated CORESET Reference Channel	1,2		CCR.3.1 TDD	-	CCR.3.1 TDD	-
SSB configuration	1,2		SSB.3 FR2		SSB.3 FR2	
OCNG Patterns	1,2		OP.3		OP.3	
Initial BWP Configuration	1,2		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration	1,2		DLBWP.1.3 ULBWP.1.3		DLBWP.1.3 ULBWP.1.3	
TRS Configuration	1,2		TRS.2.1 TDD		TRS.2.1 TDD	
PDCCH/PDSCH TCI Configuration	1,2		TCI.State.2		TCI.State.2	
SMTC configuration	1,2		SMTC.1		SMTC.1	
CSI-RS configuration for RRM	1,2		CSI-RS.RRM.3.1 TDD	CSI-RS.RRM.3.2 TDD	CSI-RS.RRM.3.1 TDD	CSI-RS.RRM.3.2 TDD
Time offset between Cell 2 and Cell 3	1,2	µs	0.58		0.58	
EPRE ratio of PSS to SSS	1,2	dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS Note 1						
EPRE ratio of OCNG to OCNG DMRS Note 1						
Propagation condition	1,2	-	AWGN	AWGN	AWGN	AWGN
Antenna configuration	1,2	-	1x2	1x2	1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void

Table A.5.7.7.2.2-2: CSI-RSRP inter-frequency OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 2	Cell 3	Cell 2	Cell 3
Angle of arrival configuration		Setup 4b according to clause A.3.15.4.2		Setup 4b according to clause A.3.15.4.2	
		AoA1 Spherical coverage	AoA2 Rx Beam Peak	AoA1 Spherical coverage	AoA2 Rx Beam Peak
Assumption for UE beams Note 7		Rough	Rough	Assumption for UE beams Note 7	
N_{oc} Note1	dBm/15kHz Note4	-90.6	-90.6	(Table B.2.3-2 Rx Beam Peak +1.97dB)	(Table B.2.3-2 Rx Beam Peak -3.03dB)
N_{oc} Note1	dBm/SCS Note4	-81.6	-81.6	(Table B.2.3-2 Rx Beam Peak +11.0dB)	(Table B.2.3-2 Rx Beam Peak +6.0dB)
$\hat{E}_s / N_{oc}$	dB	6.0	6.0	17.0	-1.0
SSB_RP Note2	dBm/SCS	-75.60	-75.60	(Table B.2.3-2 Rx Beam Peak +28.0dB)	(Table B.2. 3-2 Rx Beam Peak +5.0dB)
($SSB_RP_{Cell\ 1}$ – $SSB_RP_{Cell\ 2}$)	dB	0		23.00	
$\hat{E}_s / I_{ot\ BB}$ Note6	dB	5.29	5.96	8.86	-3.92
CSI_RP	dBm/SCS	-75.60	-75.60	(Table B.2.2-2 Rx Beam Peak +2.1dB)	(Table B.2.2-2 Rx Beam Peak +2.1dB)
Io Note2	dBm/95.04 MHz Note4	-50.03	-50.03	(Table B.2.3-2 Rx Beam Peak +52.68dB)	(Table B.2.3-2 Rx Beam Peak +33.13dB)
($Io_{freq\ 1}$ – $Io_{freq\ 2}$)	dB	0		19.55	

Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 2: SSB_RP, Es/Iot, Io, ($SSB_RP_{Cell\ 2}$ – $SSB_RP_{Cell\ 1}$) and ($Io_{freq\ 2}$ – $Io_{freq\ 1}$) levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 3: Void

Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone

Note 5: Void

Note 6: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P or ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.

Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.5.7.7.2.3 Test Requirements

The CSI-RSRP measurement accuracy for Cell 2 and Cell 3 shall fulfil the absolute requirements in clause 10.1.5.3.1 and the relative requirements in clause 10.1.5.3.2.

Test 1:

- Absolute accuracy of Cell 2 and absolute accuracy of Cell 3. The UE is deemed to meet the requirement if the reported CSI-RSRP is in the range shown in Table A.5.7.7.2.3-1.
- Relative accuracy of Cell 3 compared with Cell 2. The UE is deemed to meet the requirement if the difference in reported CSI -RSRP meets the requirements in Table A.5.7.7.2.3-2.

Test 2:

- Absolute accuracy of Cell 2 and absolute accuracy of Cell 3. The UE is deemed to meet the requirement if the reported CSI -RSRP is in the range shown in Table A.5.7.7.2.3-1.
- Relative accuracy of Cell 3 compared with Cell 2. The UE is deemed to meet the requirement if the difference in reported CSI -RSRP meets the requirements in Table A.5.7.7.2.3-2.

Table A.5.7.7.2.3-1: CSI-RSRP absolute accuracy test requirement

	Test requirement Notes1,2,3,4
Cell 2	CSI _RP2 -δ +G_{min} +X ≤ Reported RSRP(dBm) ≤ CSI _RP2 +δ +G_{max}
Cell 3	CSI _RP3 -δ +G_{min} ≤ Reported RSRP(dBm) ≤ CSI _RP3 +δ +G_{max}
Note 1:	CSI_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration
Note 2:	δ is the RSRP absolute accuracy requirement from Table 10.1.5.1.1-1, selected according to the Io used in the test
Note 3:	G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class
Note 4:	X is the Spherical coverage gain difference in dB, derived as (UE Refsens - UE Spherical coverage) from TS 38.101-2 [19] clauses 7.3.2 and 7.3.4, selected according to the UE power class and operating band. X is always a negative value.

Table A.5.7.7.2.3-2: CSI-RSRP relative accuracy test requirement

	Test requirement Notes1,2,3,4
Cell 3 – Cell 2	CSI _RP3 - CSI _RP2 -δ ≤ Reported RSRP(dB) ≤ CSI_RP3 - CSI_RP2 +δ –(X)
Note 1:	CSI_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration
Note 2:	δ is the RSRP relative accuracy requirement from Table 10.1.5.1.2-1
Note 3:	Void
Note 4:	X is the Spherical coverage gain difference in dB, derived as (UE Refsens - UE Spherical coverage) from TS 38.101-2 [19] clauses 7.3.2 and 7.3.4, selected according to the UE power class and operating band. X is always a negative value.

A.5.7.8 CSI-RSRQ

A.5.7.8.1 EN-DC Intra-frequency measurement accuracy with FR2 serving cell and FR2 target cell

A.5.7.8.1.1 Test Purpose and Environment

The purpose of this test is to verify that the CSI-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.8 for inter-frequency measurement.

A.5.7.8.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table A.5.7.8.1.2-1. The absolute accuracy of CSI-RSRQ intra-frequency measurement is test by using the parameters in Table A.5.7.8.1.2-2. In all test cases, Cell 2 is the PSCell and Cell 3 is the target cell. The configuration of cell 1 (E-UTRA PCell) is specified in clause A.3.7.2.1.

Table A.5.7.8.1.2-1: CSI-RSRQ Intra frequency CSI-RSRQ supported test configurations

Config	Description
1	FDD LTE PCell, Cell 2&3 120 kHz SSB&CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
2	TDD LTE PCell, Cell 2&3 120 kHz SSB&CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table A.5.7.8.1.2-2: CSI-RSRQ Intra frequency test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN			Freq1		Freq1	
Duplex mode			TDD		TDD	
TDD configuration			TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$		MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
TRS configuration			TRS.2.1 TDD		TRS.2.1 TDD	
CSI-RS configuration for RRM			CSI-RS.RRM.FR2.1 TDD			
TCI state			TCI.State .0		TCI.State .0	
PDSCH Reference measurement channel			SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET Reference Channel			CR.3.1 TDD	-	CR.3.1 TDD	-
Control channel RMC			CCR.3.1 TDD	-	CCR.3.1 TDD	-
OCNG Patterns			OP.1	OP.1	OP.1	OP.1
SMTC configuration			SMTC.1			
SSB configuration			SSB.1 FR2	SSB.1 FR2	SSB.1 FR2	SSB.1 FR2
Time offset with Cell 2		µs	-	0.58	-	0.58
PDSCH/PDCCH subcarrier spacing		kHz	120	120	120	120
SS-RSSI-Measurement			Not Applicable			
EPRE ratio of PSS to SSS		dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						

EPRE ratio of PDCCH_DMRS to SSS EPRE ratio of PDCCH to PDCCH_DMRS EPRE ratio of PDSCH_DMRS to SSS EPRE ratio of PDSCH to PDSCH_DMRS EPRE ratio of OCNG DMRS to SSS Note 1 EPRE ratio of OCNG to OCNG DMRS Note 1					
$\hat{E}_s / N_{oc}$	dB	3	3	-3	-3

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: CSI-RSRQ, CSI-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: CSI-RSRQ and CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: Void

Table A.5.7.8.1.2-3: CSI-RSRQ Intra frequency OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 2	Cell 3	Cell 2	Cell 3
Angle of arrival configuration		Setup 1 according to clause A.3.15.1			
Assumption for UE beams Note 9		Rough			
N_{oc} Note1	dBm/15kHz Note4	-95		-95	
N_{oc} Note1	dBm/SCS Note3	-86		-86	
CSI-RSRP Note2	dBm/SCS Note4	-83	-83	-89	-89
CSI-RSRQ Note2	dB	-14.77	-14.77	-16.81	-16.81
$\hat{E}_s / I_{ot}$	dB	-1.76	-1.76	-4.76	-4.76
Io Note2	dBm/95.04 MHz Note4	-50		-54	-54

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: CSI-RSRQ, CSI-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: CSI-RSRQ and CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6: NR operating band groups are as defined in Clause 3.5.2.
Note 7: Void
Note 8: Void
Note 9: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.5.7.8.1.3 Test Requirements

The CSI-RSRQ absolute measurement accuracy in test 1 shall be within the range Nominal CSI-RSRQ +2.5dB to Nominal CSI-RSRQ –3.5dB and the CSI-RSRQ measurement accuracy in test 2 shall be within the range Nominal CSI-RSRQ +3.5dB to Nominal CSI-RSRQ –4.5dB according to the requirements in clause 10.1.8 with an additional -1dB margin reflecting the possible impact of UE self-noise in the test. Nominal CSI-RSRQ is the value shown in table A.5.7.8.1.2-3.

A.5.7.8.2 EN-DC Inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell

A.5.7.8.2.1 Test Purpose and Environment

The purpose of this test is to verify that the CSI-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.10 for inter-frequency measurement.

A.5.7.8.2.2 Test Parameters

In this test case the two NR cells (i.e., Cell 2 and Cell 3) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.5.7.8.2.2-1. Both absolute accuracy and relative accuracy requirements of CSI-RSRQ inter-frequency measurement are tested by using test setup in Table A.5.7.8.2.2-2 and Table A.5.7.8.2.2-3. In all test cases, Cell 2 is the PSCell and Cell 3 is target cell. Cell 1 is the E-UTRA cell which specific test parameters for this test case are specified in Table A.3.7.2.1-1.

Table A.5.7.8.2.2-1: CSI-RSRQ Inter frequency CSI-RSRQ supported test configurations

Configuration	Description
1	LTE FDD, NR 120 kHz SSB&CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB&CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode

Table A.5.7.8.2.2-2: CSI-RSRQ Inter frequency general test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN		Freq1	freq2	freq1	Freq2
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-
OCNG Patterns		OP.1	OP.1	OP.1	OP.1
SMTC configuration		SMTC. 1 FR2	SMTC. 1 FR2	SMTC. 1 FR2	SMTC. 1 FR2
CSI-RS configuration for RRM		CSI-RS.RRM.FR2.1 TDD			
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
Time offset with Cell 2	µs	-	0.58	-	0.58
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS[Note 1]					
$\hat{E}_s / N_{oc}$	dB	-1.75	-1.75	-3	-3
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: CSI-RSRQ, CSI-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: CSI-RSRQ and CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Table A.5.7.8.2.2-3: CSI-RSRQ Inter frequency OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 2	Cell 3	Cell 2	Cell 3
AoA setup		Setup 1 in clause A.3.15		Setup 1 in clause A.3.15	
Assumption for UE beams Note 8		Rough		Rough	
N_{oc} Note1	dBm/15kHz Note4	-94.03		-94.03	
N_{oc} Note1	dBm/SCS Note3	-85.0		-85.0	
CSI-RP Note2	dBm/SCS Note4	-86.75	-86.75	-88	-88
CSI-RSRQ Note2	dB	-14.75	-14.75	-15.56	-15.56
$\hat{E}_s / I_{ot}$	dB	-1.75	-1.75	-3	-3
Io Note2	dBm/95.04 MHz Note4	-53.8	-53.8	-54.25	-54.25

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: CSI-RSRQ, CSI-RP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: CSI-RSRQ and CSI-RP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6: Void
Note 7: Void
Note 8: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.5.7.8.2.3 Test Requirements

The CSI-RSRQ absolute measurement accuracy in test 1 shall be within the range Nominal CSI-RSRQ +2.5dB to Nominal CSI-RSRQ -3.5dB and the CSI-RSRQ measurement accuracy in test 2 shall be within the range Nominal CSI-RSRQ +3.5dB to Nominal CSI-RSRQ -4.5dB according to the requirements in clause 10.1.10 with an additional -1dB margin reflecting the possible impact of UE self-noise in the test.

The CSI-RSRQ relative measurement accuracy shall fulfil the requirements in clause 10.1.10.

A.5.7.9 CSI-SINR

A.5.7.9.1 EN-DC Intra-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell

A.5.7.9.1.1 Test Purpose and Environment

The purpose of this test is to verify that the CSI-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.13.2.1.

A.5.7.9.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configurations are shown in Table A.5.7.9.1.2-1. The absolute accuracy of CSI-SINR intra-frequency measurement is test by using the parameters in Table A.5.7.9.1.2-2 and Table A.5.7.9.1.2-3. The configuration of cell 1 (E-UTRA PCell) is specified in clause A.3.7.2.1. In all test cases, Cell 2 is the PSCell and Cell 3 is the target cell.

Table A.5.7.9.1.2-1: CSI-SINR Intra frequency CSI-SINR supported test configurations

Configuration	Description
1	FDD LTE PCell, Cell 2&3 120 kHz SSB and CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
2	TDD LTE PCell, Cell 2&3 120 kHz SSB and CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations	

Table A.5.7.9.1.2-2: CSI-SINR Intra frequency test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN		Freq2		Freq2	
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Downlink initial BWP configuration		DLBWP.0.1			
Downlink dedicated BWP configuration		DLBWP.1.1			
Uplink initial BWP configuration		ULBWP.0.1			
Uplink dedicated BWP configuration		ULBWP.1.1			
DRX cycle configuration	ms	Not applicable			
TRS configuration		TRS.2.1 TDD			
TCI state		TCI.State.0			
PDSCH Reference measurement channel		SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-
Dedicated RMSI CORESET Reference Channel		CCR.3.1 TDD	-	CCR.3.1 TDD	-
OCNG Patterns		OP.1	OP.1	OP.1	OP.1
SMTC configuration		SMTC.1			
SSB configuration		SSB.1 FR2	SSB.1 FR2	SSB.1 FR2	SSB.1 FR2
CSI-RS for mobility		-	CSI-RS.RRM.FR2.1 TDD	-	CSI-RS.RRM.FR2.1 TDD
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
Time offset with Cell 2	μs	-	0.29	-	0.29

CSI-RSSI-Measurement		Not Applicable			
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
$\hat{E}_s / N_{oc}$	dB	4.54	2.66	-3	-3

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: CSI-SINR, CSI-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: CSI-SINR and CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Table A.5.7.9.1.2-3: CSI-SINR Intra frequency OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 2	Cell 3	Cell 2	Cell 3
Angle of arrival configuration		Setup 1 according to clause A.3.15.1		Setup 1 according to clause A.3.15.1	
Assumption for UE beams Note 7		Rough		Rough	
N_{oc} Note1	dBm/15kHz Note4	-105		N/A	
N_{oc} Note1	dBm/SCS Note3	-96		N/A	
$\hat{E}_s / N_{oc}$	dB	4.54	2.66	-3	-3
CSI-RSRP Note2	dBm/SCS Note4	-91.46	-93.34	-99	-99
CSI-SINR Note2	dB	0	-3.2	-4.76	-4.76
$\hat{E}_s / I_{ot}$	dB	0	-3.2	-4.76	-4.76
Io Note2	dBm/95.04 MHz Note4	-59.2		-64	

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: CSI-SINR, CSI-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: CSI-SINR and CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6: NR operating band groups are as defined in Clause 3.5.2.
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.5.7.9.1.3 Test Requirements

The CSI-SINR absolute measurement accuracy in test 1 shall be within the range Nominal CSI-SINR+3dB to Nominal CSI-SINR -4dB and the CSI-SINR measurement accuracy in test 2 shall be within the range Nominal CSI-SINR +3.5dB to Nominal CSI-SINR -4.5dB according to the requirements in clause 10.13.2 with an additional -1dB margin reflecting the possible impact of UE self noise in the test. Nominal CSI-SINR is the value shown in table A.5.7.9.1.2-3.

A.5.7.9.2 EN-DC Inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell

A.5.7.9.2.1 Test Purpose and Environment

The purpose of this test is to verify that the CSI-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.15.2.1 and 10.1.15.2.2 for inter-frequency measurement.

A.5.7.9.2.2 Test Parameters

In this test case the two NR cells (i.e., Cell 2 and Cell 3) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.5.7.9.2.2-1. Both absolute accuracy and relative accuracy requirements of CSI-SINR inter-frequency measurement are tested by using test setup in Table A.5.7.9.2.2-2 and Table A.5.7.9.2.2-3. In all test cases, Cell 2 is the PSCell and Cell 3 is target cell. Cell 1 is the E-UTRA cell which specific test parameters for this test case are specified in Table A.3.7.2.1-1. The TCI status for Cell 1 is defined in Table A.3.16.2-1 and TRS configuration for Cell 1 is defined in Table A.3.17.2.1-1.

Table A.5.7.9.2.2-1: CSI-SINR Inter frequency CSI-SINR supported test configurations

Configuration	Description
1	LTE FDD, NR 120 kHz SSB and CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB and CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode

Table A.5.7.9.2.2-2: CSI-SINR Inter frequency general test parameters

Parameter	Unit	Test 1		Test 2		Test 3	
		Cell 2	Cell 3	Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN		Freq1	freq2	freq1	Freq2	freq1	Freq2
Duplex mode		TDD		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Downlink initial BWP configuration		DLBWP.0.1					
Downlink dedicated BWP configuration		DLBWP.1.1					
Uplink initial BWP configuration		ULBWP.0.1					
Uplink dedicated BWP configuration		ULBWP.1.1					
DRX cycle configuration	ms	Not applicable					
TRS configuration		TRS.2.1 TDD					
TCI state		TCI.State.0					
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-	CR.3.1 TDD	-
OCNG Patterns		OP.1	OP.1	OP.1	OP.1	OP.1	OP.1
Time offset with cell 2	µs	-	0.29	-	0.29	-	0.29

SMTC configuration		SMTC.1 FR2	SMTC.1 FR2	SMTC.1 FR2	SMTC.1 FR2	SMTC.1 FR2	SMTC.1 FR2
CSI-RS for mobility		-	CSI-RS.RRM.FR2.1 TDD	-	CSI-RS.RRM.FR2.1 TDD	-	CSI-RS.RRM.FR2.1 TDD
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120	120	120
EPRE ratio of PSS to SSS EPRE ratio of PBCH_DMRS to SSS EPRE ratio of PBCH to PBCH_DMRS EPRE ratio of PDCCH_DMRS to SSS EPRE ratio of PDCCH to PDCCH_DMRS EPRE ratio of PDSCH_DMRS to SSS EPRE ratio of PDSCH to PDSCH_DMRS EPRE ratio of OCNG DMRS to SSS Note 1	dB	0	0	0	0	0	0
$\hat{E}_s / N_{oc}$	dB	-0.5	-0.5	11.0	11.0	-3.0	-3.0

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: CSI-SINR, CSI-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: CSI-SINR and CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Table A.5.7.9.2.2-3: CSI-SINR Inter frequency OTA related test parameters

Parameter	Unit	Test 1		Test 2		Test 3	
		Cell 2	Cell 3	Cell 2	Cell 3	Cell 2	Cell 3
Angle of arrival configuration	degrees	Setup 1 according to A.3.15.1		Setup 1 according to A.3.15.1		Setup 1 according to A.3.15.1	
Assumption for UE beams Note 7		Rough		Rough		Rough	
N_{oc} Note1	dBm/15kHz Note4	-105		-105		-105	
N_{oc} Note1	dBm/SCS Note3	-96		-96		-96	
$\hat{E}_s / N_{oc}$	dB	-0.5	-0.5	11.0	11.0	-3.0	-3.0
CSI-RSRP Note2	dBm/SCS Note4	-96.5	-96.5	-85	-85	-99	-99
CSI-SINR Note2	dB	-0.5	-0.5	11	11	-3.0	-3.0
$\hat{E}_s / I_{ot}$	dB	-0.5	-0.5	11	11	-3.0	-3.0
Io Note2	dBm/95.04 MHz Note4	-69.3		-55.4		-65.24	

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: CSI-SINR, CSI-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: CSI-SINR and CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6: NR operating band groups are as defined in Clause 3.5.2.
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.5.7.9.2.3 Test Requirements

The CSI-SINR absolute measurement accuracy in test 1 shall be within the range Nominal CSI-SINR+3dB to Nominal CSI-SINR -4dB and the CSI-SINR measurement accuracy in test 2 shall be within the range Nominal CSI-SINR+3.5dB to Nominal CSI-SINR -4.5dB according to the requirements in clause 10.1.15.2.1 with an additional -1dB margin reflecting the possible impact of UE self noise in the test. Nominal CSI-SINR is the value shown in table A.5.7.2.2.2-3

The CSI-SINR relative measurement accuracy shall fulfil the requirements in clause 10.1.15.2.2.

A.5.8 Void

A.6 NR standalone tests with all NR cells in FR1

A.6.1 SA: RRC_IDLE state mobility

A.6.1.1 Cell re-selection to NR

A.6.1.1.1 Cell reselection to FR1 intra-frequency NR case

A.6.1.1.1.1 Test Purpose and Environment

This test is to verify the requirement for the intra frequency NR cell reselection requirements specified in clause 4.2.2.3.

A.6.1.1.1.2 Test Parameters

The test scenario comprises of 1 NR carrier and 2 cells as given in tables A.6.1.1.1.2-1, A.6.1.1.1.2-2 and A.6.1.1.1.2-3. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Only cell 1 is already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2.

Table A.6.1.1.1.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.6.1.1.1.2-2: General test parameters for intra frequency NR cell re-selection test case

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3	Cell1	
T2 end condition	Active cell		1, 2, 3	Cell2	
	Neighbour cells		1, 2, 3	Cell1	
Final condition	Active cell		1, 2, 3	Cell1	
	Neighbour cells		1, 2, 3	Cell2	
RF Channel Number			1, 2, 3	1	
Time offset between cells			1	3 ms	Asynchronous cells
			2	3 µs	Synchronous cells
			3	3 µs	Synchronous cells
Access Barring Information		-	1, 2, 3	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.2 FR1	
SMTC configuration			1	SMTC.2	Configured in SIB2 of Cell 1
				SMTC.6	Configured in SIB2 of Cell 2
			2	SMTC.1	
			3	SMTC.1	
DRX cycle length		s	1, 2, 3	1.28	The value shall be used for all cells in the test.

PRACH configuration index		1, 2, 3	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell		1, 2, 3	Not configured	
T1	s	1, 2, 3	>7	During T1, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed, The intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T2
T2	s	1, 2, 3	40	T2 needs to be defined so that cell re-selection reaction time is taken into account.
T3	s	1, 2, 3	15	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.6.1.1.1.2-3: Cell specific test parameters for intra frequency NR cell re-selection test case in AWGN

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
PDSCH RMC configuration		1	SR.1.1 FDD			SR.1.1 FDD		
		2	SR.1.1 TDD			SR.1.1 TDD		
		3	SR.2.1 TDD			SR.2.1 TDD		
RMSI CORESET RMC configuration		1	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD			CCR.1.1 FDD		
		2	CCR.1.1 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
OCNG Pattern		1, 2, 3	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2, 3	SSB			SSB		
Qrxlevmin	dBm/SCS	1, 2	-130			-130		
		3	-127			-127		
Pcompensation	dB	1, 2, 3	0			0		
$Qhyst_s$	dB	1, 2, 3	0			0		
$Qoffset_{s,n}$	dB	1, 2, 3	0			0		
Cell_selection_and_reselection_quality_measurement		1, 2, 3	SS-RSRP			SS-RSRP		
$\hat{E}_s/I_{ot}$	dB	1	16	-3.11	2.79	-infinity	2.79	-3.11
		2						
		3						
N_{oc} Note2	dBm/SCS	1	-98					
		2	-98					
		3	-95					
N_{oc} Note2	dBm/15 kHz	1	-98					
		2						

		3						
$\hat{E}_s / N_{oc}$	dB	1	16	13	16	-infinity	16	13
		2						
		3						
SS-RSRP Note3	dBm/SCS	1	-82	-85	-82	-infinity	-82	-85
		2	-82	-85	-82	-infinity	-82	-85
		3	-79	-82	-79	-infinity	-79	-82
Io	dBm/9.36 MHz	1	-53.94	-52.21	-52.21	Same as parameters specified in Cell 1 columns-		
	dBm/9.36 MHz	2	-53.94	-52.21	-52.21			
	dBm/38.16 MHz	3	-47.85	-46.12	-46.12			
Treselection	s	1, 2, 3	0	0	0	0	0	0
SintrasearchP	dB	1, 2, 3	60			60		
Propagation Condition		1, 2, 3	AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.1.1.1.3 Test Requirements

The cell reselection delay to a newly detectable cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on Cell 2.

The cell re-selection delay to a newly detectable cell shall be less than 34 s.

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on cell 1.

The cell re-selection delay to an already detected cell shall be less than 8 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a newly detectable cell can be expressed as: $T_{detect, NR_Intra} + T_{SI-NR}$, and to an already detected cell can be expressed as: $T_{evaluate, NR_intra} + T_{SI-NR}$,

Where:

T_{detect, NR_Intra} See Table 4.2.2.3-1 in clause 4.2.2.3

$T_{evaluate, NR_intra}$ See Table 4.2.2.3-1 in clause 4.2.2.3

T_{SI-NR} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280ms is assumed in this test case.

This gives a total of 33.28 s, allow 34 s for the cell re-selection delay to a newly detectable cell and 7.68 s for the cell re-selection delay to an already detected cell in the test case, which we allow 8 s.

A.6.1.1.2 Cell reselection to FR1 inter-frequency NR case

A.6.1.1.2.1 Test Purpose and Environment

This test is to verify the requirement for the inter frequency NR cell reselection requirements specified in clause 4.2.2.4.

A.6.1.1.2.2 Test Parameters

The test scenario comprises of 2 cells on 2 different NR carriers respectively as given in tables A.6.1.1.2.2-1, A.6.1.1.2.2-2 and A.6.1.1.2.2-3. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas and cell 2 is of higher priority than cell 1.

Table A.6.1.1.2.2-1: Supported test configurations

Configuration	Description of serving cell	Description of target cell
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.6.1.1.2.2-2: General test parameters for FR1 inter frequency NR cell re-selection test case

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3	Cell2	The UE camps on cell 2 in the initial phase and during T1 period the UE reselects to cell 1
	Neighbour cell		1, 2, 3	Cell 1	
T1 end condition	Active cell		1, 2, 3	Cell1	The UE shall perform reselection to cell 1 during T1
	Neighbour cells		1, 2, 3	Cell2	
T3 end condition	Active cell		1, 2, 3	Cell2	The UE shall perform reselection to cell 2 with higher priority during T3
	Neighbour cell		1, 2, 3	Cell 1	
RF Channel Number			1, 2, 3	1, 2	
Time offset between cells			1	3 ms	Asynchronous cells
			2	3 µs	Synchronous cells
			3	3 µs	Synchronous cells
Access Barring Information		-	1, 2, 3	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.2 FR1	
SMTC configuration			1	SMTC.2	Configured in SIB4 of Cell 1
				SMTC.6	Configured in SIB4 of Cell 2
			2	SMTC.1	
			3	SMTC.1	
DRX cycle length		s	1, 2, 3	1.28	The value shall be used for all cells in the test.
PRACH configuration index			1, 2, 3	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2, 3	Not configured	

T1	s	1, 2, 3	15	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2	s	1, 2, 3	>7	During T2, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T3.
T3	s	1, 2, 3	75	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.6.1.1.2.2-3: Cell specific test parameters for FR1 inter frequency NR cell re-selection test case in AWGN

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
PDSCH RMC configuration		1	SR.1.1 FDD			SR.1.1 FDD		
		2	SR.1.1 TDD			SR.1.1 TDD		
		3	SR.2.1 TDD			SR.2.1 TDD		
RMSI CORESET RMC configuration		1	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD			CCR.1.1 FDD		
		2	CCR.1.1 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
OCNG Pattern		1, 2, 3	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2, 3	SSB			SSB		
Qrxlevmin	dBm/SCS	1, 2	-140			-140		
		3	-137			-137		
Pcompensation	dB	1, 2, 3	0			0		
Cell_selection_and_reselection_quality_measurement		1, 2, 3	SS-RSRP			SS-RSRP		
$\hat{E}_s / I_{ot}$	dB	1	14	14	14	-4	-infinity	12
		2						
		3						
N_{oc} Note2	dBm/SCS	1	-98					
		2	-98					
		3	-95					
N_{oc} Note2	dBm/15 kHz	1	-98					
		2						
		3						
$\hat{E}_s / N_{oc}$	dB	1	14	14	14	-4	-infinity	12
		2						
		3						
SS-RSRP Note3	dBm/SCS	1	-84	-84	-84	-102	-infinity	-86
		2	-84	-84	-84	-102	-infinity	-86

		3	-81	-81	-81	-99	-infinity	-83
Io	dBm/9.36 MHz	1	-55.88	-55.88	-55.88	-68.60	-70.05	-57.78
	dBm/9.36 MHz	2	-55.88	-55.88	-55.88	-68.60	-70.05	-57.78
	dBm/38.16 MHz	3	-49.79	-49.79	-49.79	-62.50	-63.96	-51.69
Treselection	s	1, 2, 3	0	0	0	0	0	0
SnonintrasearchP	dB	1, 2, 3	50			50		
$Thresh_{x, highP}$	dB	1, 2, 3	48			48		
$Thresh_{serving, lowP}$	dB	1, 2, 3	44			44		
$Thresh_{x, lowP}$	dB	1, 2, 3	50			50		
Propagation Condition		1, 2, 3	AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.1.1.2.3 Test Requirements

The cell reselection delay to a higher priority cell is defined as the time from the beginning of time period T3, to the moment when the UE camps again on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on cell 2.

The cell re-selection delay to a higher priority cell shall be less than 68 s.

The cell reselection delay to a lower priority cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on cell 1.

The cell re-selection delay to a lower priority cell shall be less than 8 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a higher priority cell can be expressed as: $T_{higher_priority_search} + T_{evaluate, NR_inter} + T_{SI-NR}$, and to a lower priority cell can be expressed as: $T_{evaluate, NR_inter} + T_{SI-NR}$,

Where:

$T_{higher_priority_search}$ See clause 4.2.2.7

$T_{evaluate, NR_inter}$ See Table 4.2.2.4-1 in clause 4.2.2.4

T_{SI-NR} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 67.68 s, allow 68 s for the cell re-selection delay to a higher priority cell and 7.68 s for the cell re-selection delay to a lower priority cell in the test case, which we allow 8 s.

A.6.1.1.3 Cell reselection to FR1 intra-frequency NR case for UE fulfilling low mobility relaxed measurement criterion

A.6.1.1.3.1 Test Purpose and Environment

This test is to verify the requirement for the intra frequency NR cell reselection requirements for UE fulfilling low mobility criterion specified in clause 4.2.2.9.2

A.6.1.1.3.2 Test Parameters

The test scenario comprises of 1 NR carrier and 2 cells as given in tables A.6.1.1.3.2-1, A.6.1.1.3.2-2 and A.6.1.1.3.2-3. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2.

Table A.6.1.1.3.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.6.1.1.3.2-2: General test parameters for FR1 intra frequency NR cell re-selection test case for UE fulfilling low mobility criterion

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3	Cell1	The UE camps on cell 1 in the initial phase
	Neighbour cells		1, 2, 3	Cell2	
T1 end condition	Active cell		1, 2, 3	Cell2	The UE reselects to cell 2 during T1 period
	Neighbour cells		1, 2, 3	Cell1	
Final condition	Active cell		1, 2, 3	Cell1	The UE reselects to cell 1 during T2 period
	Neighbour cells		1, 2, 3	Cell2	
RF Channel Number			1, 2, 3	1	
Time offset between cells			1	3 ms	Asynchronous cells
			2	3 μs	Synchronous cells
			3	3 μs	Synchronous cells
Access Barring Information		-	1, 2, 3	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.2 FR1	
SMTC configuration			1	SMTC pattern 2	Configured in SIB2 of Cell 1
				SMTC pattern 6	Configured in SIB2 of Cell 2
			2	SMTC pattern 1	
			3	SMTC pattern 1	
DRX cycle length		s	1, 2, 3	0.64	The value shall be used for all cells in the test.

PRACH configuration index		1, 2, 3	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell		1, 2, 3	Not configured	
T1	s	1, 2, 3	25	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2	s	1, 2, 3	25	T2 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.6.1.1.3.2-3: Cell specific test parameters for FR1 intra frequency NR cell re-selection test case in AWGN for UE fulfilling low mobility criterion

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		CR.1.1 FDD	
		2	CR.1.1 TDD		CR.1.1 TDD	
		3	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		CCR.1.1 FDD	
		2	CCR.1.1 TDD		CCR.1.1 TDD	
		3	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Pattern		1, 2, 3	OP.1 defined in A.3.2.1		OP.1 defined in A.3.2.1	
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1, 2, 3	SSB		SSB	
Qrxlevmin	dBm/SCS	1, 2	-140		-140	
		3	-137		-137	
Pcompensation	dB	1, 2, 3	0		0	
$Qhyst_s$	dB	1, 2, 3	0		0	
$Qoffset_{s,n}$	dB	1, 2, 3	0		0	
$S_{SearchDeltaP}$	dB	1, 2, 3	3		3	
$T_{SearchDeltaP}$	s	1, 2, 3	5		5	
Cell_selection_and_reselection_quality_measurement		1, 2, 3	SS-RSRP		SS-RSRP	
$\hat{E}_s / I_{ot}$	dB	1, 2, 3	-3.11	2.79	2.79	-3.11

N_{oc} Note2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note2	dBm/15 kHz	1, 2, 3	-98			
$\hat{E}_s / N_{oc}$	dB	1, 2, 3	13	16	16	13
SS-RSRP Note3	dBm/SCS	1	-85	-82	-82	-85
		2	-85	-82	-82	-85
		3	-82	-79	-79	-82
Io	dBm/9.36 MHz	1	-52.21	-52.21	specified in Cell 1 columns-	
	dBm/9.36 MHz	2	-52.21	-52.21		
	dBm/38.16 MHz	3	-46.12	-46.12		
Treselection	s	1, 2, 3	0	0	0	0
SintrasearchP	dB	1, 2, 3	60		60	
Propagation Condition		1, 2, 3	AWGN			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.6.1.1.3.3 Test Requirements

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 2.

The cell re-selection delay to an already detected cell shall be less than 17 s.

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 1.

The cell re-selection delay to an already detected cell shall be less than 17 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to an already detected cell can be expressed as: $T_{evaluate,NR_Intra} + T_{SI\text{-}NR}$,

Where:

$T_{evaluate,NR_Intra}$ See Table 4.2.2.9.2-1 in clause 4.2.2.9.2 for reselection to Cell 2 during T1 with UE fulfilling low mobility criterion. 15.36s.

$T_{SI\text{-}NR}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 16.64 s, allow 17 s for the cell re-selection delay to an already detected cell for UE fulfilling low mobility criterion in the test case.

A.6.1.1.4 Cell reselection to FR1 intra-frequency NR case for UE fulfilling not-at-cell edge relaxed measurement criterion

A.6.1.1.4.1 Test Purpose and Environment

This test is to verify the relaxed cell re-selection requirement for UEs configured with not-at-cell edge criterion specified in clause 4.2.2.9.3.

A.6.1.1.4.2 Test Parameters

The test scenario comprises of 1 NR carrier and 2 cells as given in tables A.6.1.1.4.2-1, A.6.1.1.4.2-2 and A.6.1.1.4.2-3. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both Cell 1 and Cell 2 are already identified by the UE prior to the start of the test. Cell 1 and Cell 2 belong to different tracking areas.

Table A.6.1.1.4.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.6.1.1.4.2-2: General test parameters for FR1 intra frequency NR cell re-selection test case for UE fulfilling not-at-cell edge criterion

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active Cell		1, 2, 3	Cell1	The UE camps on Cell 1 in the initial phase
	Neighbour Cells		1, 2, 3	Cell2	
T1 end condition	Active Cell		1, 2, 3	Cell2	The UE shall fulfil the not-at-cell edge criterion and reselect to cell 2 during T1 period during T1.
	Neighbour Cells		1, 2, 3	Cell1	
T2 end condition	Active Cell		1, 2, 3	Cell1	The UE shall perform reselection to Cell 1 during T2
	Neighbour Cells		1, 2, 3	Cell2	
RF Channel Number			1, 2, 3	1	
Time offset between Cells			1	3 ms	Asynchronous Cells
			2	3 μs	Synchronous Cells
			3	3 μs	Synchronous Cells
Access Barring Information		-	1, 2, 3	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.2 FR1	
SMTC configuration			1	SMTC pattern 2	Configured in SIB2 of Cell 1
				SMTC pattern 6	Configured in SIB2 of Cell 2
			2	SMTC pattern 1	
			3	SMTC pattern 1	
DRX cycle length		s	1, 2, 3	0.64	The value shall be used for all Cells in the test.
PRACH configuration index			1, 2, 3	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2

rangeToBestCell		1, 2, 3	Not configured	
T1	s	1, 2, 3	20	T1 needs to be defined so that Cell re-selection reaction time is taken into account.
T2	s	1, 2, 3	20	T2 needs to be defined so that Cell re-selection reaction time is taken into account.

Table A.6.1.1.4.2-3: Cell specific test parameters for FR1 intra frequency NR cell re-selection test case in AWGN for UE fulfilling not-at-cell edge criterion

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		CR.1.1 FDD	
		2	CR.1.1 TDD		CR.1.1 TDD	
		3	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		CCR.1.1 FDD	
		2	CCR.1.1 TDD		CCR.1.1 TDD	
		3	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Pattern		1, 2, 3	OP.1 defined in A.3.2.1		OP.1 defined in A.3.2.1	
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1, 2, 3	SSB		SSB	
Qrxlevmin	dBm/SCS	1, 2	-140		-140	
		3	-137		-137	
Pcompensation	dB	1, 2, 3	0		0	
$Qhyst_s$	dB	1, 2, 3	0		0	
$Qoffset_{s,n}$	dB	1, 2, 3	0		0	
Cell_selection_and_reselection_quality_measurement		1, 2, 3	SS-RSRP		SS-RSRP	
$\hat{E}_s / I_{ot}$	dB	1	-3.11	2.79	2.79	-3.11
		2				
		3				
N_{oc} Note2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note2	dBm/15 kHz	1	-98			
		2				
		3				
$\hat{E}_s / N_{oc}$	dB	1	13	16	16	13
		2				
		3				

SS-RSRP Note3	dBm/SCS	1	-85	-82	-82	-85
		2	-85	-82	-82	-85
		3	-82	-79	-79	-82
Io	dBm/9.36 MHz	1	-52.21	-52.21	-52.21	-52.21
	dBm/9.36 MHz	2	-52.21	-52.21	-52.21	-52.21
	dBm/38.16 MHz	3	-46.12	-46.12	-46.12	-46.12
Treselection	s	1, 2, 3	0	0	0	0
SintrasearchP	dB	1, 2, 3	60		60	
$S_{SearchThresholdP}$	dB	1, 2, 3	50	Not sent	Not sent	50
Propagation Condition		1, 2, 3	AWGN			

Note 1: OCNG shall be used such that both Cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other Cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.1.1.4.3 Test Requirements

The cell re-selection delay to an already detected cell for UE configured with *cellEdgeEvaluation* criterion is defined as the time from the beginning of time period T1, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 2.

The cell re-selection delay to an already detected cell for UE configured with *cellEdgeEvaluation* criterion shall be less than 17s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to an already detected cell for UE configured with relaxed measurement criterion can be expressed as: $T_{evaluate,NR_Intra} + T_{SI-NR}$,

Where:

$T_{evaluate,NR_Intra}$ See Table 4.2.2.9.3-1 for UE fulfilling not-at-cell edge criterion in clause 4.2.2.9.3.

T_{SI-NR} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a Cell; 1280ms is assumed in this test case.

This gives a total of 16.64s, allow 17s for the cell re-selection delay to an already detected cell for UE fulfilling not-at-cell edge criterion in the test case.

A.6.1.1.5 Cell reselection to FR1 inter-frequency NR case for UE fulfilling low mobility relaxed measurement criterion

A.6.1.1.5.1 Test Purpose and Environment

This test is to verify the requirement for the inter frequency NR cell reselection requirements specified in clause 4.2.2.10.2, for UE fulfilling low mobility relaxed measurement criterion.

A.6.1.1.5.2 Test Parameters

The test scenario comprises of 2 cells on 2 different NR carriers respectively as given in tables A.6.1.1.5.2-1, A.6.1.1.5.2-2 and A.6.1.1.5.2-3. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas and cell 2 is of higher priority than cell 1.

As specified in the Test Purpose, the UE is configured with the relaxed measurement criterion for UE with low mobility defined in clause 5.2.4.9.1 in [1]. So, Cell 2 and Cell 1 configure the UE as follows:

lowMobilityEvalutation [2] criterion is configured according to the parameters listed in Table A.6.1.1.5.2-3;

cellEdgeEvaluation [2] criterion is not configured;

combineRelaxedMeasCondition [2] is not configured;

Table A.6.1.1.5.2-1: Supported test configurations

Configuration	Description of serving cell	Description of target cell
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.6.1.1.5.2-2: General test parameters for FR1 inter frequency NR cell re-selection test case for UE fulfilling low mobility criterion

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3	Cell2	The UE camps on cell 2 in the initial phase, it fulfills Low Mobility relaxation measurements criterion, and during T1 period the UE reselects to cell 1
	Neighbour cells		1, 2, 3	Cell1	
T1 end condition	Active cell		1, 2, 3	Cell1	The UE shall perform reselection to cell 1 during T1
	Neighbour cells		1, 2, 3	Cell2	
T2 end condition	Active cell		1, 2, 3	Cell2	The UE shall perform reselection to cell 2 with higher priority during T2
	Neighbour cells		1, 2, 3	Cell1	
RF Channel Number			1, 2, 3	1, 2	
Time offset between cells			1	3 ms	Asynchronous cells
			2	3 µs	Synchronous cells
			3	3 µs	Synchronous cells
Access Barring Information		-	1, 2, 3	Not Sent	No additional delays in random access procedure.
SSB Configuration			1	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.2 FR1	
SMTC configuration			1	SMTC pattern 2	Configured in SIB4 of Cell 1
				SMTC pattern 6	Configured in SIB4 of Cell 2
			2	SMTC pattern 1	
			3	SMTC pattern 1	
DRX cycle length		s	1, 2, 3	0.64	The value shall be used for all cells in the test.
PRACH configuration index			1, 2, 3	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2, 3	Not configured	
T1		s	1, 2, 3	25 s	T1 is defined so that cell re-selection reaction time is taken into account.

T2	s	1, 2, 3	25 s	T2 is defined so that cell re-selection reaction time is taken into account.

Table A.6.1.1.5.2-3: Cell specific test parameters for FR1 inter frequency NR cell re-selection test case in AWGN for UE fulfilling low mobility criterion

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		SR.1.1 FDD	
		2	SR.1.1 TDD		SR.1.1 TDD	
		3	SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET RMC configuration		1	CR.1.1 FDD		CR.1.1 FDD	
		2	CR.1.1 TDD		CR.1.1 TDD	
		3	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		CCR.1.1 FDD	
		2	CCR.1.1 TDD		CCR.1.1 TDD	
		3	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Pattern		1, 2, 3	OP.1 defined in A.3.2.1		OP.1 defined in A.3.2.1	
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1, 2, 3	SSB		SSB	
Qrxlevmin	dBm/SCS	1, 2	-140		-140	
		3	-137		-137	
Pcompensation	dB	1, 2, 3	0		0	
$Qhyst_s$	dB	1, 2, 3	0		0	
$Qoffset_{s,n}$	dB	1, 2, 3	0		0	
Cell_selection_and_reselection_quality_measurement		1, 2, 3	SS-RSRP		SS-RSRP	
$\hat{E}_s / I_{ot}$	dB	1	14	14	-4	12
		2				
		3				
N_{oc} Note2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note2	dBm/15 kHz	1	-98			
		2				
		3				
$\hat{E}_s / N_{oc}$	dB	1	14	14	-4	12
		2				
		3				
SS-RSRP Note3	dBm/SCS	1	-84	-84	-102	-86
		2	-84	-84	-102	-86
		3	-81	-81	-99	-83
Io	dBm/9.36 MHz	1	-55.88	-55.88	-68.60	-57.78
	dBm/9.36 MHz	2	-55.88	-55.88	-68.60	-57.78
	dBm/38.16 MHz	3	-49.79	-49.79	-62.50	-51.69

Treselection	s	1, 2, 3	0	0	0	0
SnonintrasearchP	dB	1, 2, 3	Not sent		Not sent	
$Thresh_{x, highP}$	dB	1, 2, 3	48		48	
$Thresh_{serving, lowP}$	dB	1, 2, 3	44		44	
$Thresh_{x, lowP}$	dB	1, 2, 3	50		50	
$S_{SearchDeltaP}$	dB	1, 2, 3	3		3	
$T_{SearchDeltaP}$	s	1, 2, 3	5		5	
Propagation Condition		1, 2, 3	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.1.1.5.3 Test Requirements

The cell reselection delay to an already detected lower priority cell for UE fulfilling low mobility relaxed measurements is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 1.

The cell re-selection delay to a lower priority cell for UE fulfilling low mobility relaxed measurements shall be less than 17 s.

The cell reselection delay to an already detected higher priority cell for UE fulfilling low mobility relaxed measurements is defined as the time from the beginning of time period T2, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the RRCSetupRequest message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to an already detected higher priority cell for UE fulfilling low mobility relaxed measurements shall be less than 17 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a known lower priority cell can be expressed as: $T_{evaluate, NR_ inter} + T_{SI-NR}$,

Where:

$T_{evaluate, NR_ inter}$ See Table 4.2.2.10.2-1 in clause 4.2.2.10.2

T_{SI-NR} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 16.64 s, allow 17s for the cell re-selection delay to an already detected lower priority cell and 16.64s for the cell re-selection delay to an already detected higher priority cell, which we allow 17s for UE fulfilling low mobility relaxed measurements in the test case.

A.6.1.1.6 Cell reselection to FR1 inter-frequency NR case for UE fulfilling not-at-cell edge relaxed measurement criterion

A.6.1.1.6.1 Test Purpose and Environment

This test is to verify the requirement for the inter frequency NR cell reselection requirements specified in clause 4.2.2.10.3, for UE fulfilling not-at-cell edge relaxed measurement criterion.

A.6.1.1.6.2 Test Parameters

The test scenario comprises of 2 cells on 2 different NR carriers respectively as given in tables A.6.1.1.6.2-1, A.6.1.1.6.2-2 and A.6.1.1.6.2-3. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas and cell 2 is of higher priority than cell 1.

As specified in the Test Purpose, the UE is configured with the relaxed measurement criterion for UE not-at-cell edge as defined in clause 5.2.4.9.2 in [1]. So, Cell 2 and Cell 1configures the UE as follows:

cellEdgeEvaluation [2] criterion is configured according to the parameters listed in Table A.6.1.1.5.2-3;

lowMobilityEvalutation [2] criterion is not configured;

combineRelaxedMeasCondition [2] is not configured;

Table A.6.1.1.6.2-1: Supported test configurations

Configuration	Description of serving cell	Description of target cell
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.6.1.1.6.2-2: General test parameters for FR1 inter frequency NR cell re-selection test case for UE fulfilling not-at-cell edge criterion

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3	Cell2	The UE camps on cell 2 in the initial phase, it fulfills Not-at-cell edge relaxation measurements criterion, and during T1 period the UE reselects to cell 1
	Neighbour cells		1, 2, 3	Cell1	
T1 end condition	Active cell		1, 2, 3	Cell1	The UE shall perform reselection to cell 1 during T1
	Neighbour cells		1, 2, 3	Cell2	
T2 end condition	Active cell		1, 2, 3	Cell2	The UE shall perform reselection to cell 2 with higher priority during T2
	Neighbour cells		1, 2, 3	Cell1	
RF Channel Number			1, 2, 3	1, 2	
Time offset between cells			1	3 ms	Asynchronous cells
			2	3 µs	Synchronous cells
			3	3 µs	Synchronous cells
Access Barring Information		-	1, 2, 3	Not Sent	No additional delays in random access procedure.
SSB Configuration			1	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.2 FR1	

SMTC configuration		1	SMTC pattern 2	Configured in SIB4 of Cell 1
			SMTC pattern 6	Configured in SIB4 of Cell 2
		2	SMTC pattern 1	
		3	SMTC pattern 1	
DRX cycle length	s	1, 2, 3	0.64	The value shall be used for all cells in the test.
PRACH configuration index		1, 2, 3	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell		1, 2, 3	Not configured	
T1	s	1, 2, 3	20 s	T1 is defined so that cell re-selection reaction time is taken into account.
T2	s	1, 2, 3	20 s	T2 is defined so that cell re-selection reaction time is taken into account.

Table A.6.1.1.6.2-3: Cell specific test parameters for FR1 inter frequency NR cell re-selection test case in AWGN for UE fulfilling not-at-cell edge criterion

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		SR.1.1 FDD	
		2	SR.1.1 TDD		SR.1.1 TDD	
		3	SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET RMC configuration		1	CR.1.1 FDD		CR.1.1 FDD	
		2	CR.1.1 TDD		CR.1.1 TDD	
		3	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		CCR.1.1 FDD	
		2	CCR.1.1 TDD		CCR.1.1 TDD	
		3	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Pattern		1, 2, 3	OP.1 defined in A.3.2.1		OP.1 defined in A.3.2.1	
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1, 2, 3	SSB		SSB	
Qrxlevmin	dBm/SCS	1, 2	-140		-140	
		3	-137		-137	
Pcompensation	dB	1, 2, 3	0		0	
$Qhyst_s$	dB	1, 2, 3	0		0	
$Qoffset_{s,n}$	dB	1, 2, 3	0		0	
Cell_selection_and_reselection_quality_measurement		1, 2, 3	SS-RSRP		SS-RSRP	
$\hat{E}_s / I_{ot}$	dB	1	14	14	-4	12
		2				
		3				
N_{oc} Note2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note2	dBm/15 kHz	1	-98			
		2				
		3				
$\hat{E}_s / N_{oc}$	dB	1	14	14	-4	12
		2				
		3				
SS-RSRP Note3	dBm/SCS	1	-84	-84	-102	-86
		2	-84	-84	-102	-86
		3	-81	-81	-99	-83
Io	dBm/9.36 MHz	1	-55.88	-55.88	-68.60	-57.78
	dBm/9.36 MHz	2	-55.88	-55.88	-68.60	-57.78
	dBm/38.16 MHz	3	-49.79	-49.79	-62.50	-51.69
Treselection	s	1, 2, 3	0	0	0	0

SnonintrasearchP	dB	1, 2, 3	Not sent	Not sent
$Thresh_{x, highP}$	dB	1, 2, 3	48	48
$Thresh_{serving, lowP}$	dB	1, 2, 3	44	44
$Thresh_{x, lowP}$	dB	1, 2, 3	50	50
$S_{SearchThresholdP}$	dB	1, 2, 3	50	50
$S_{SearchThresholdQ}$	s	1, 2, 3	Not Configured	
Propagation Condition		1, 2, 3	AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

A.6.1.1.6.3 Test Requirements

The cell reselection delay to an already detected lower priority cell for UE fulfilling not-at-cell edge relaxed measurements is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 1.

The cell re-selection delay to an already detected lower priority cell for UE fulfilling not-at-cell edge relaxed measurements shall be less than 17 s.

The cell reselection delay to an already detected higher priority cell for UE fulfilling not-at-cell-edge relaxed measurements is defined as the time from the beginning of time period T2, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the RRCSetupRequest message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to an already detected higher priority cell for UE fulfilling not-at-cell-edge relaxed measurements shall be less than 17 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a lower priority cell can be expressed as: $T_{evaluate, NR_ inter} + T_{SI-NR}$,

Where:

$T_{evaluate, NR_ inter}$ See Table 4.2.2.10.3-1 in clause 4.2.2.10

T_{SI-NR} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 16.64 s , allow 17s for the cell re-selection delay to an already detected lower priority cell and 16.64s for the cell re-selection delay to an already higher priority cell, which we allow 17s for UE fulfilling not-at-cell edge relaxed measurements in the test case.

A.6.1.1.7 Cell reselection to FR1 intra-frequency NR case for UE configured with *highSpeedMeasFlag-r16*

A.6.1.1.7.1 Test Purpose and Environment

This test is to verify the requirement for the intra frequency NR cell reselection requirements for UE configured with *highSpeedMeasFlag-r16* specified in clause 4.2.2.3.

A.6.1.1.7.2 Test Parameters

The test scenario comprises of 1 NR carrier and 2 cells as given in tables A.6.1.1.1.x-1, A.6.1.1.1.x-2 and A.6.1.1.1.x-3. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Only cell 1 is already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2. *highSpeedMeasFlag-r16* is broadcasted to UE.

Table A.6.1.1.7.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.6.1.1.7.2-2: General test parameters for intra frequency NR cell re-selection test case for UE *configured with highSpeedMeasFlag-r16*

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3	Cell1	
	Neighbour cells		1, 2, 3	Cell2	
T2 end condition	Active cell		1, 2, 3	Cell2	
	Neighbour cells		1, 2, 3	Cell1	
Final condition	Active cell		1, 2, 3	Cell1	
	Neighbour cells		1, 2, 3	Cell2	
RF Channel Number			1, 2, 3	1	
Time offset between cells			1	3 ms	Asynchronous cells
			2	3 µs	Synchronous cells
			3	3 µs	Synchronous cells
Access Barring Information		-	1, 2, 3	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.2 FR1	
SMTC configuration			1	SMTC pattern 2	Configured in SIB2 of Cell 1
				SMTC pattern 6	Configured in SIB2 of Cell 2
			2	SMTC pattern 1	
			3	SMTC pattern 1	
DRX cycle length		s	1, 2, 3	0.32	The value shall be used for all cells in the test.

PRACH configuration index		1, 2, 3	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell		1, 2, 3	Not configured	
T1	s	1, 2, 3	>7	During T1, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed, The intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T2
T2	s	1, 2, 3	4	T2 needs to be defined so that cell re-selection reaction time is taken into account.
T3	s	1, 2, 3	3	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.6.1.1.7.2-3: Cell specific test parameters for intra frequency NR cell re-selection test case for UE c*onfigured with highSpeedMeasFlag-r16*

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
PDSCH RMC configuration		1	SR.1.1 FDD			SR.1.1 FDD		
		2	SR.1.1 TDD			SR.1.1 TDD		
		3	SR.2.1 TDD			SR.2.1 TDD		
RMSI CORESET RMC configuration		1	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD			CCR.1.1 FDD		
		2	CCR.1.1 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
OCNG Pattern		1, 2, 3	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2, 3	SSB			SSB		
Qrxlevmin	dBm/SCS	1, 2	-140			-140		
		3	-137			-137		
Pcompensation	dB	1, 2, 3	0			0		
$Qhyst_s$	dB	1, 2, 3	0			0		
$Qoffset_{s,n}$	dB	1, 2, 3	0			0		
Cell_selection_and_reselection_quality_measurement		1, 2, 3	SS-RSRP			SS-RSRP		
$\hat{E}_s / I_{ot}$	dB	1	16	-3.11	2.79	-infinity	2.79	-3.11
		2						
		3						
N_{oc} Note2	dBm/SCS	1	-98					
		2	-98					

		3	-95					
N_{oc} Note2	dBm/15 kHz	1	-98					
		2						
		3						
$\hat{E}_s / N_{oc}$	dB	1	16	13	16	-infinity	16	13
		2						
		3						
SS-RSRP Note3	dBm/SCS	1	-82	-85	-82	-infinity	-82	-85
		2	-82	-85	-82	-infinity	-82	-85
		3	-79	-82	-79	-infinity	-79	-82
Io	dBm/9.36 MHz	1	-53.94	-52.21	-52.21	Same as parameters specified in Cell 1 columns-		
	dBm/9.36 MHz	2	-53.94	-52.21	-52.21			
	dBm/38.16 MHz	3	-47.85	-46.12	-46.12			
Treselection	s	1, 2, 3	0	0	0	0	0	0
SintrasearchP	dB	1, 2, 3	60			60		
Propagation Condition		1, 2	AWGN			AWGN 1944Hz Note4		
Propagation Condition		3	AWGN			AWGN 3334Hz Note5		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: The AWGN 1944 Hz condition is a non fading propagation channel with one tap. Doppler shift is a constant 1944 Hz.

Note 5: The AWGN 3334 Hz condition is a non fading propagation channel with one tap. Doppler shift is a constant 3334 Hz.

A.6.1.1.7.3 Test Requirements

The cell reselection delay to a newly detectable cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 2.

The cell re-selection delay to a newly detectable cell shall be less than 4 s.

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 1.

The cell re-selection delay to an already detected cell shall be less than 3 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a newly detectable cell can be expressed as: $T_{detect, NR_Intra} + T_{SI-NR}$, and to an already detected cell can be expressed as: $T_{evaluate, NR_intra} + T_{SI-NR}$,

Where:

T_{detect, NR_Intra} See Table 4.2.2.3-2 in clause 4.2.2.3

$T_{evaluate, NR_intra}$ See Table 4.2.2.3-2 in clause 4.2.2.3

T_{SI-NR} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280ms is assumed in this test case.

This gives a total of 3.84s, allow 4s for the cell re-selection delay to a newly detectable cell and 2.24 s for the cell re-selection delay to an already detected cell in the test case, which we allow 3 s.

A.6.1.1.8 Cell reselection to FR1 inter-frequency NR case for UE configured with *highSpeedMeasInterFreq-r17*

A.6.1.1.8.1 Test Purpose and Environment

This test is to verify the requirement for the inter frequency NR cell reselection requirements for UE configured with *highSpeedMeasInterFreq-r17* specified in clause 4.2.2.4.

A.6.1.1.8.2 Test Parameters

The test scenario comprises of 2 cells on 2 different NR carriers respectively as given in tables A.6.1.1.8.2-1, A.6.1.1.8.2-2 and A.6.1.1.8.2-3. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas and cell 2 is of higher priority than cell 1.

Table A.6.1.1.8.2-1: Supported test configurations

Configuration	Description of serving cell	Description of target cell
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.6.1.1.8.2-2: General test parameters for FR1 inter frequency NR cell re-selection test case

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3	Cell2	The UE camps on cell 2 in the initial phase and during T1 period the UE reselects to cell 1
	Neighbour cell		1, 2, 3	Cell 1	
T1 end condition	Active cell		1, 2, 3	Cell1	The UE shall perform reselection to cell 1 during T1
	Neighbour cells		1, 2, 3	Cell2	
T3 end condition	Active cell		1, 2, 3	Cell2	The UE shall perform reselection to cell 2 during T3
	Neighbour cell		1, 2, 3	Cell 1	
RF Channel Number			1, 2, 3	1, 2	
Time offset between cells			1	3 ms	Asynchronous cells
			2	3 µs	Synchronous cells
			3	3 µs	Synchronous cells
Access Barring Information		-	1, 2, 3	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.2 FR1	
SMTC configuration			1	SMTC.2	
			2	SMTC.1	

		3	SMTC.1	
DRX cycle length	s	1, 2, 3	0.32	The value shall be used for all cells in the test.
PRACH configuration index		1, 2, 3	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell		1, 2, 3	Not configured	
T1	s	1, 2, 3	10	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2	s	1, 2, 3	>7	During T2, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T3.
T3	s	1, 2, 3	12	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.6.1.1.8.2-3: Cell specific test parameters for FR1 inter frequency NR cell re-selection test case in AWGN

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
PDSCH RMC configuration		1	SR.1.1 FDD			SR.1.1 FDD		
		2	SR.1.1 TDD			SR.1.1 TDD		
		3	SR.2.1 TDD			SR.2.1 TDD		
RMSI CORESET RMC configuration		1	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD			CCR.1.1 FDD		
		2	CCR.1.1 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
OCNG Pattern		1, 2, 3	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2, 3	SSB			SSB		
Qrxlevmin	dBm/SCS	1, 2	-140			-140		
		3	-137			-137		
Pcompensation	dB	1, 2, 3	0			0		
Cell_selection_and_reselection_quality_measurement		1, 2, 3	SS-RSRP			SS-RSRP		
$\hat{E}_s/I_{ot}$	dB	1	14	14	14	-4	-infinity	12
		2						
		3						
N_{oc} Note2	dBm/SCS	1	-98					
		2	-98					
		3	-95					
N_{oc} Note2	dBm/15 kHz	1	-98					
		2						

		3						
$\hat{E}_s / N_{oc}$	dB	1	14	14	14	-4	-infinity	12
		2						
		3						
SSB_RP Note3	dBm/SCS	1	-84	-84	-84	-102	-infinity	-86
		2	-84	-84	-84	-102	-infinity	-86
		3	-81	-81	-81	-99	-infinity	-83
Io	dBm/9.36 MHz	1	-55.88	-55.88	-55.88	-68.60	-70.05	-57.78
	dBm/9.36 MHz	2	-55.88	-55.88	-55.88	-68.60	-70.05	-57.78
	dBm/38.16 MHz	3	-49.79	-49.79	-49.79	-62.50	-63.96	-51.69
Treselection	s	1, 2, 3	0	0	0	0	0	0
SnonintrasearchP	dB	1, 2, 3	50			50		
$Thresh_{x, highP}$	dB	1, 2, 3	48			48		
$Thresh_{serving, lowP}$	dB	1, 2, 3	44			44		
$Thresh_{x, lowP}$	dB	1, 2, 3	50			50		
Propagation Condition		1, 2	AWGN for active cell, AWGN 1944Hz Note 4 for neighbour cell					
Propagation Condition		3	AWGN for active cell, AWGN 3334Hz Note 5 for neighbour cell					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: The AWGN 1944 Hz condition is a non fading propagation channel with one tap. Doppler shift is a constant 1944 Hz.

Note 5: The AWGN 3334 Hz condition is a non fading propagation channel with one tap. Doppler shift is a constant 3334 Hz.

A.6.1.1.8.3 Test Requirements

The cell reselection delay to a newly detectable cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 2.

The cell re-selection delay to a newly detectable cell shall be less than 5 s.

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 1.

The cell re-selection delay to an already detected cell shall be less than 3 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a newly detectable cell can be expressed as: $T_{detect,NR_Inter_HST} + T_{SI\text{-}NR}$, and to an already detected cell can be expressed as: $T_{evaluate,NR_Inter_HST} + T_{SI\text{-}NR}$,

Where:

T_{detect,NR_Inter_HST} See Table 4.2.2.4-2 in clause 4.2.2.4

$T_{evaluate,NR_Inter_HST}$ See Table 4.2.2.4-2 in clause 4.2.2.4

$T_{SI\text{-}NR}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280ms is assumed in this test case.

This gives a total of 4.48s, allow 5s for the cell re-selection delay to a newly detectable cell and 2.24 s for the cell re-selection delay to an already detected cell in the test case, which we allow 3 s.

A.6.1.2 Inter-RAT E-UTRAN cell re-selection

A.6.1.2.1 Cell reselection to higher priority E-UTRAN

A.6.1.2.1.1 Test Purpose and Environment

This test is to verify the requirement for the NR to E-UTRAN inter-RAT cell reselection requirements specified in clause 4.2.2.5 when the E-UTRAN cell is of higher priority.

A.6.1.2.1.2 Test Parameters

The test scenario comprises of one NR cell and one E-UTRAN cell as given in tables A.6.1.2.1.2-1, A.6.1.2.1.2-2, A.6.1.2.1.2-3 and A.6.1.2.1.2-4. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. NR cell 1 is already identified by the UE prior to the start of the test. E-UTRAN cell 2 is of higher priority than cell 1.

Table A.6.1.2.1.2-1: Supported test configurations

Configuration	Description of serving cell	Description of target cell
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
6	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.6.1.2.1.2-2: General test parameters for NR to E-UTRAN cell re-selection test case

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4, 5, 6	Cell1	The UE camps on cell 1 in the initial phase and during T2 period the UE reselects to cell 2.
T2 end condition	Active cell		1, 2, 3, 4, 5, 6	Cell2	The UE shall perform reselection to cell 2 during T2.
	Neighbour cell		1, 2, 3, 4, 5, 6	Cell1	
T3 end condition	Active cell		1, 2, 3, 4, 5, 6	Cell1	The UE shall perform reselection to cell 1 during T3 for iteration of the tests.
	Neighbour cell		1, 2, 3, 4, 5, 6	Cell2	
Access Barring Information		-	1, 2, 3, 4, 5, 6	Not Sent	No additional delays in random access procedure.
DRX cycle length		s	1, 2, 3, 4, 5, 6	1.28	The value shall be used for all cells in the test.
NR PRACH configuration index			1, 2, 3, 4, 5, 6	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
E-UTRAN PRACH configuration index			1, 2, 3	53	As specified in table 5.7.1-2 in TS 36.211 [23]
			4, 5, 6	4	

E-UTRAN PRACH		1, 2, 3	53	As specified in table 5.7.1-2 in TS 36.211 [23]
configuration index		4, 5, 6	4	
T1	s	1, 2, 3, 4, 5, 6	>7	During T1, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T2.
T2	s	1, 2, 3, 4, 5, 6	75	T2 needs to be defined so that cell re-selection reaction time is taken into account.
T3	s	1, 2, 3, 4, 5, 6	15	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.6.1.2.1.2-3: Cell specific test parameters for NR cell 1

Parameter	Unit	Test configuration	Cell 1		
			T1	T2	T3
TDD configuration		1, 4	N/A		
		2, 5	TDDConf.1.1		
		3, 6	TDDConf.2.1		
PDSCH parameters		1, 4	SR.1.1 FDD		
		2, 5	SR.1.1 TDD		
		3, 6	SR.2.1 TDD		
RMSI CORESET parameters		1, 4	CR.1.1 FDD		
		2, 5	CR.1.1 TDD		
		3, 6	CR.2.1 TDD		
Dedicated CORESET parameters		1, 4	CCR.1.1 FDD		
		2, 5	CCR.1.1 TDD		
		3, 6	CCR.2.1 TDD		
SSB parameters		1, 4	SSB.1 FR1		
		2, 5	SSB.1 FR1		
		3, 6	SSB.2 FR1		
NR SMTC parameters		1, 4	SMTC.2		
		2, 5	SMTC.1		
		3, 6	SMTC.1		
OCNG Pattern		1, 2, 3, 4, 5, 6	OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1, 2, 3, 4, 5, 6	DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3, 4, 5, 6	ULBWP.0.1		
RLM-RS		1, 2, 3, 4, 5, 6	SSB		
Qrxlevmin	dBm/SCS	1, 2, 4, 5	-140		
		3, 6	-137		
N_{oc}	dBm/SCS	1, 4	-98		
		2, 5	-98		
		3, 6	-95		
N_{oc}	dBm/15 kHz	1, 2, 3, 4, 5, 6	-98		
SS-RSRP	dBm/SCS	1, 4	-84	-84	-84
		2, 5	-84	-84	-84
		3, 6	-81	-81	-81
$\hat{E}_s / I_{ot}$	dB	1, 4	14	14	14
		2, 5			
		3, 6			
$\hat{E}_s / N_{oc}$	dB	1, 4	14	14	14
		2, 5			

		3, 6			
Io	dBm/9.36 MHz	1, 4	-55.88	-55.88	-55.88
	dBm/9.36 MHz	2, 5	-55.88	-55.88	-55.88
	dBm/38.16 MHz	3, 6	-49.79	-49.79	-49.79
Treselection	S	1, 2, 3, 4, 5, 6	0		
SnonintrasearchP	dB	1, 2, 3, 4, 5, 6	50		
$Thresh_{x, highP}$ (Note 2)	dB	1, 2, 3, 4, 5, 6	48		
$Thresh_{serving, lowP}$	dB	1, 2, 3, 4, 5, 6	44		
$Thresh_{x, lowP}$	dB	1, 2, 3, 4, 5, 6	50		
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: This refers to the value of $Thresh_{x, high}$ which is included in NR system information, and is a threshold for the E-UTRA target cell					

Table A.6.1.2.1.2-4: Cell specific test parameters for E-UTRA cell 2

Parameter	Unit	Cell 2		
		T1	T2	T3
E-UTRA RF Channel number		1		
$BW_{channel}$	MHz	10		
OCNG Patterns defined in TS 36.133 [15] clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6		
PBCH_RA	dB	0		
PBCH_RB	dB			
PSS_RA	dB			
SSS_RA	dB			
PCFICH_RB	dB			
PHICH_RA	dB			
PHICH_RB	dB			
PDCCH_RA	dB			
PDCCH_RB	dB			
PDSCH_RA	dB			
PDSCH_RB	dB			
OCNG_RA Note 1	dB			
OCNG_RB Note 1	dB			
Qrxlevmin	dBm	-140		
N_{oc}	dBm/15 kHz	-98		
RSRP	dBm/15 KHz	-infinity	-86	-102
$\hat{E}_s / I_{ot}$	dB	-infinity	12	-4
$\hat{E}_s / N_{oc}$	dB	-infinity	12	-4
$Treselection_{EUTRAN}$	S	0		
SnonintrasearchP	dB	Not sent		
$Thresh_{x, highP}$	dB	48		
$Thresh_{serving, lowP}$	dB	44		
$Thresh_{x, lowP}$ (Note 2)	dB	50		
Propagation Condition		AWGN		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: This refers to the value of $Thresh_{x, Low}$ which is included in E-UTRA system information, and is a threshold for the NR target cell				

A.6.1.2.1.3 Test Requirements

The cell reselection delay to a higher priority E-UTRAN cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a higher priority cell shall be less than 68 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a higher priority cell can be expressed as: $T_{higher_priority_search} + T_{evaluate,\ E\text{-}UTRAN} + T_{SI\text{-}E\text{-}UTRA}$,

Where:

$T_{higher_priority_search}$ See clause 4.2.2.7

$T_{evaluate,\ E\text{-}UTRAN}$ See Table 4.2.2.5-1 in clause 4.2.2.5

$T_{SI\text{-}E\text{-}UTRA}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 67.68 s, allow 68 s for the cell re-selection delay to a higher priority E-UTRAN cell.

A.6.1.2.2 Cell reselection to lower priority E-UTRAN

A.6.1.2.2.1 Test Purpose and Environment

This test is to verify the requirement for the NR to E-UTRAN inter-RAT cell reselection requirements specified in clause 4.2.2.5 when the E-UTRAN cell is of lower priority.

A.6.1.2.2.2 Test Parameters

The test scenario comprises of one NR cell and one E-UTRAN cell as given in tables A.6.1.2.2.2-1, A.6.1.2.2.2-2, A.6.1.2.2.2-3 and A.6.1.2.2.2-4. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both NR cell 1 and E-UTRAN cell 2 are already identified by the UE prior to the start of the test. E-UTRAN cell 2 is of lower priority than cell 1.

Table A.6.1.2.2.2-1: Supported test configurations

Configuration	Description of serving cell	Description of target cell
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
6	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.6.1.2.2.2-2: General test parameters for NR to E-UTRAN cell re-selection test case

Parameter	Unit	Test configuration	Value	Comment

Initial condition	Active cell		1, 2, 3, 4, 5, 6	Cell1	The UE camps on cell 1 in the initial phase.
	Neighbour cell		1, 2, 3, 4, 5, 6	Cell2	
T1 end condition	Active cell		1, 2, 3, 4, 5, 6	Cell2	The UE shall perform reselection to cell 2 during T1.
	Neighbour cell		1, 2, 3, 4, 5, 6	Cell1	
T2 end condition	Active cell		1, 2, 3, 4, 5, 6	Cell1	The UE shall perform reselection to cell 1 during T2 for iteration of the tests.
	Neighbour cell		1, 2, 3, 4, 5, 6	Cell2	
Access Barring Information		-	1, 2, 3, 4, 5, 6	Not Sent	No additional delays in random access procedure.
DRX cycle length		s	1, 2, 3, 4, 5, 6	1.28	The value shall be used for all cells in the test.
NR PRACH configuration index			1, 2, 3, 4, 5, 6	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
E-UTRAN PRACH configuration index			1, 2, 3	534	As specified in table 5.7.1-2 in TS 36.211 [23]
			4, 5, 6		
T1		s	1, 2, 3, 4, 5, 6	15	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2		s	1, 2, 3, 4, 5, 6	75	T2 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.6.1.2.2.2-3: Cell specific test parameters for NR cell 1

Parameter	Unit	Test configuration	Cell 1	
			T1	T2
TDD configuration		1, 4	N/A	
		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD	
		2, 5	SR.1.1 TDD	
		3, 6	SR.2.1 TDD	
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD	
		2, 5	CR.1.1 TDD	
		3, 6	CR.2.1 TDD	
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD	
		2, 5	CCR.1.1 TDD	
		3, 6	CCR.2.1 TDD	
SSB configuration		1, 4	SSB.1 FR1	
		2, 5	SSB.1 FR1	
		3, 6	SSB.2 FR1	
SMTC configuration		1, 4	SMTC.2	
		2, 5	SMTC.1	
		3, 6	SMTC.1	
OCNG Pattern		1, 2, 3, 4, 5, 6	OP.1 defined in A.3.2.1	
Initial DL BWP configuration		1, 2, 3, 4, 5, 6	DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3, 4, 5, 6	ULBWP.0.1	
RLM-RS		1, 2, 3, 4, 5, 6	SSB	
Qrxlevmin	dBm/SCS	1, 2, 4, 5	-140	
		3, 6	-137	
N_{oc}	dBm/SCS	1, 4	-98	
		2, 5	-98	
		3, 6	-95	

N_{oc}	dBm/15 kHz	1, 2, 3, 4, 5, 6	-98	
SS-RSRP	dBm/SCS	1, 4	-102	-86
		2, 5	-102	-86
		3, 6	-99	-83
$\hat{E}_s/I_{ot}$	dB	1, 4	-4	12
		2, 5		
		3, 6		
$\hat{E}_s/N_{oc}$	dB	1, 4	-4	12
		2, 5		
		3, 6		
Io	dBm/9.36 MHz	1, 4	-68.60	-57.78
	dBm/9.36 MHz	2, 5	-68.60	-57.78
	dBm/38.16 MHz	3, 6	-62.50	-51.69
Treselection	S	1, 2, 3, 4, 5, 6	0	
SnonintrasearchP	dB	1, 2, 3, 4, 5, 6	Not sent	
$Thresh_{x, highP}$	dB	1, 2, 3, 4, 5, 6	48	
$Thresh_{serving, lowP}$	dB	1, 2, 3, 4, 5, 6	44	
$Thresh_{x, lowP (Note 2)}$	dB	1, 2, 3, 4, 5, 6	50	
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: This refers to the value of $Thresh_{x, high}$ which is included in NR system information, and is a threshold for the E-UTRA target cell				

Table A.6.1.2.2.2-4: Cell specific test parameters for E-UTRA cell 2

Parameter	Unit	Cell 2	
		T1	T2
E-UTRA RF Channel number		1	
$BW_{channel}$	MHz	10	
OCNG Patterns defined in TS 36.133 [15] clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6	
PBCH_RA	dB	0	
PBCH_RB	dB		
PSS_RA	dB		
SSS_RA	dB		
PCFICH_RB	dB		
PHICH_RA	dB		
PHICH_RB	dB		
PDCCH_RA	dB		
PDCCH_RB	dB		
PDSCH_RA	dB		
PDSCH_RB	dB		
OCNG_RA Note 1	dB		
OCNG_RB Note 1	dB		
Qrxlevmin	dBm	-140	
N_{oc}	dBm/15 kHz	-98	
RSRP	dBm/15 KHz	-84	-84
$\hat{E}_s/I_{ot}$	dB	14	14
$\hat{E}_s/N_{oc}$	dB	14	14
$Treselection_{EUTRAN}$	S	0	

SnonintrasearchP	dB	Not sent
$Thresh_{x, highP}$ (Note 2)	dB	48
$Thresh_{serving, lowP}$	dB	44
$Thresh_{x, lowP}$	dB	50
Propagation Condition		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: This refers to the value of $Thresh_{x, high}$ which is included in E-UTRA system information, and is a threshold for the NR target cell		

A.6.1.2.2.3 Test Requirements

The cell reselection delay to a lower priority E-UTRAN cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a lower priority cell shall be less than 8 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a lower priority cell can be expressed as: $T_{evaluate, E-UTRAN} + T_{SI-E-UTRA}$,

Where:

$T_{evaluate, E-UTRAN}$ See Table 4.2.2.5-1 in clause 4.2.2.5

$T_{SI-E-UTRA}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 7.68 s, allow 8 s for the cell re-selection delay to a lower priority E-UTRAN cell.

A.6.1.2.3 Cell reselection to lower priority E-UTRAN for UE fulfilling low mobility relaxed measurement criterion

A.6.1.2.3.1 Test Purpose and Environment

This test is to verify the requirement for the NR to E-UTRAN inter-RAT cell reselection when UE fulfills the low mobility criterion specified in clause 4.2.2.11.2 and the E-UTRAN cell is of lower priority.

A.6.1.2.3.2 Test Parameters

The test scenario comprises of one NR cell and one E-UTRAN cell as given in tables A.6.1.2.3.2-1, A.6.1.2.3.2-2, A.6.1.2.3.2-3 and A.6.1.2.3.2-4. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both NR cell 1 and E-UTRAN cell 2 are already identified by the UE prior to the start of the test. E-UTRAN cell 2 is of lower priority than cell 1.

As specified in the Test Purpose, the UE is configured with the relaxed measurement criterion for UE with low mobility defined in clause 5.2.4.9.1 in [1]. So, Cell 1 configures the UE as follows:

- *lowMobilityEvalutation* [2] criterion is configured according to the parameters listed in Table A.6.1.2.3.2-3;
- *cellEdgeEvaluation* [2] criterion is not configured;
- *combineRelaxedMeasCondition* [2] is not configured

Table A.6.1.2.3.2-1: Supported test configurations

Configuration	Description of serving cell	Description of target cell
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
6	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.6.1.2.3.2-2: General test parameters for NR to E-UTRAN cell re-selection test case for UE fulfilling low mobility criterion

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4, 5, 6	Cell1	The UE camps on cell 1 in the initial phase, it fulfills Low Mobility relaxation measurements criterion, and during T1 period the UE reselects to cell 2
	Neighbour cells		1, 2, 3, 4, 5, 6	Cell2	
T1 end condition	Active cell		1, 2, 3, 4, 5, 6	Cell2	The UE shall perform reselection to cell 2 during T1
	Neighbour cells		1, 2, 3, 4, 5, 6	Cell1	
T2 end condition	Active cell		1, 2, 3, 4, 5, 6	Cell1	The UE shall perform reselection to cell 1 with higher priority during T2 for iteration of the tests.
	Neighbour cells		1, 2, 3, 4, 5, 6	Cell2	
Access Barring Information		-	1, 2, 3, 4, 5, 6	Not Sent	No additional delays in random access procedure.
DRX cycle length		s	1, 2, 3, 4, 5, 6	0.64	The value shall be used for all cells in the test.
NR PRACH configuration index			1, 2, 3, 4, 5, 6	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
E-UTRAN PRACH configuration index			1, 2, 3	53	As specified in table 5.7.1-2 in TS 36.211 [23]
			4, 5, 6	4	
T1		s	1, 2, 3, 4, 5, 6	24	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2		s	1, 2, 3, 4, 5, 6	24	T2 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.6.1.2.3.2-3: Cell specific test parameters for NR cell 1

Parameter	Unit	Test configuration	Cell 1	
			T1	T2
TDD configuration		1, 4	N/A	
		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD	
		2, 5	SR.1.1 TDD	
		3, 6	SR.2.1 TDD	
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD	
		2, 5	CR.1.1 TDD	

		3, 6	CR.2.1 TDD	
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD	
		2, 5	CCR.1.1 TDD	
		3, 6	CCR.2.1 TDD	
SSB configuration		1, 4	SSB.1 FR1	
		2, 5	SSB.1 FR1	
		3, 6	SSB.2 FR1	
SMTC configuration		1, 4	SMTC pattern 2	
		2, 5	SMTC pattern 1	
		3, 6	SMTC pattern 1	
OCNG Pattern		1, 2, 3, 4, 5, 6	OP.1 defined in A.3.2.1	
Initial DL BWP configuration		1, 2, 3, 4, 5, 6	DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3, 4, 5, 6	ULBWP.0.1	
RLM-RS		1, 2, 3, 4, 5, 6	SSB	
Qrxlevmin	dBm/SCS	1, 2, 4, 5	-140	
		3, 6	-137	
N_{oc}	dBm/SCS	1, 4	-98	
		2, 5	-98	
		3, 6	-95	
N_{oc}	dBm/15 kHz	1, 2, 3, 4, 5, 6	-98	
SS-RSRP	dBm/SCS	1, 4	-102	-86
		2, 5	-102	-86
		3, 6	-99	-83
$\hat{E}_s / I_{ot}$	dB	1, 4	-4	12
		2, 5		
		3, 6		
$\hat{E}_s / N_{oc}$	dB	1, 4	-4	12
		2, 5		
		3, 6		
Io	dBm/9.36 MHz	1, 4	-68.60	-57.78
	dBm/9.36 MHz	2, 5	-68.60	-57.78
	dBm/38.16 MHz	3, 6	-62.50	-51.69
TreselectionP	S	1, 2, 3, 4, 5, 6	0	
Snonintrasearch	dB	1, 2, 3, 4, 5, 6	50	
$Thresh_{x, highP}$	dB	1, 2, 3, 4, 5, 6	48	
$Thresh_{serving, lowP}$	dB	1, 2, 3, 4, 5, 6	44	
$Thresh_{x, lowP (Note 2)}$	dB	1, 2, 3, 4, 5, 6	50	
$S_{SearchDeltaP}$	dB	1, 2, 3, 4, 5, 6	3	
$T_{SearchDeltaP}$	s	1, 2, 3, 4, 5, 6	5	
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: This refers to the value of $Thresh_{x, low}$ which is included in NR system information, and is a threshold for the E-UTRA target cell

Table A.6.1.2.3.2-4: Cell specific test parameters for E-UTRA cell 2

Parameter	Unit	Cell 2	
		T1	T2
E-UTRA RF Channel number		1	
$BW_{channel}$	MHz	10	
OCNG Patterns defined in TS 36.133 [15] clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6	

PBCH_RA	dB	0	
PBCH_RB	dB		
PSS_RA	dB		
SSS_RA	dB		
PCFICH_RB	dB		
PHICH_RA	dB		
PHICH_RB	dB		
PDCCH_RA	dB		
PDCCH_RB	dB		
PDSCH_RA	dB		
PDSCH_RB	dB		
OCNG_RA Note 1	dB		
OCNG_RB Note 1	dB		
Qrxlevmin	dBm	-140	
N_{oc}	dBm/15 kHz	-98	
RSRP	dBm/15 KHz	-84	-84
$\hat{E}_s / I_{ot}$	dB	14	14
$\hat{E}_s / N_{oc}$	dB	14	14
$Treselection_{EUTRAN}$	S	0	
Snonintrasearch	dB	Not sent	
$Thresh_{x, high (Note 2)}$	dB	48	
$Thresh_{serving, low}$	dB	44	
$Thresh_{x, low}$	dB	50	
Propagation Condition		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: This refers to the value of $Thresh_{x, high}$ which is included in E-UTRA system information, and is a threshold for the NR target cell			

A.6.1.2.3.3 Test Requirements

The cell reselection delay to a lower priority E-UTRAN cell with UE fulfilling low mobility criterion is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the *RRCConnectionRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a lower priority cell shall be less than 17 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a lower priority cell can be expressed as: $T_{evaluate, E-UTRAN} + T_{SI-E-UTRA}$,

Where:

$T_{evaluate, E-UTRAN}$ See Table 4.2.2.11.2-1 in clause 4.2.2.11.2

$T_{SI-E-UTRA}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 15.36 ($T_{evaluate, E-UTRAN}$) + 1.28 ($T_{SI-E-UTRA}$) = 16.64 s, allow 17 s for the cell re-selection delay to a lower priority E-UTRAN cell for UE fulfilling low mobility criterion.

A.6.1.2.4 Cell reselection to lower priority E-UTRAN for UE fulfilling not-at-cell edge relaxed measurement criterion

A.6.1.2.4.1 Test Purpose and Environment

This test is to verify the requirement for the NR to E-UTRAN inter-RAT cell reselection requirements when UE fulfills not-at-cell edge criterion specified in clause 4.2.2.11.3 when the E-UTRAN cell is of lower priority.

A.6.1.2.4.2 Test Parameters

The test scenario comprises of one NR cell and one E-UTRAN cell as given in tables A.6.1.2.4.2-1, A.6.1.2.4.2-2, A.6.1.2.4.2-3 and A.6.1.2.4.2-4. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both NR cell 1 and E-UTRAN cell 2 are already identified by the UE prior to the start of the test. E-UTRAN cell 2 is of lower priority than cell 1.

As specified in the Test Purpose, the UE is configured with the relaxed measurement criterion for UE with not-at-cell edge defined in clause 5.2.4.9.2 in [1]. So, Cell 1 configures the UE as follows:

- *lowMobilityEvalutation* [2] criterion is not configured;
- *cellEdgeEvaluation* [2] criterion is configured according to the parameters listed in Table A.6.1.2.4.2-3;
- *combineRelaxedMeasCondition* [2] is not configured

Table A.6.1.2.4.2-1: Supported test configurations

Configuration	Description of serving cell	Description of target cell
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
6	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.6.1.2.4.2-2: General test parameters for NR to E-UTRAN cell re-selection test case for UE fulfilling not-at-cell edge criterion

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4, 5, 6	Cell1	The UE camps on cell 1 in the initial phase and fulfill the not at the cell edge criteria.
	Neighbour cells		1, 2, 3, 4, 5, 6	Cell2	
T1 end condition	Active cell		1, 2, 3, 4, 5, 6	Cell2	The UE shall perform reselection to cell 2 during T1.
	Neighbour cells		1, 2, 3, 4, 5, 6	Cell1	
T2 end condition	Active cell		1, 2, 3, 4, 5, 6	Cell1	The UE shall perform reselection to cell 1 during T2 for iteration of the tests.
	Neighbour cells		1, 2, 3, 4, 5, 6	Cell2	
Access Barring Information		-	1, 2, 3, 4, 5, 6	Not Sent	No additional delays in random access procedure.
DRX cycle length		s	1, 2, 3, 4, 5, 6	0.64	The value shall be used for all cells in the test.

NR PRACH configuration index		1, 2, 3, 4, 5, 6	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
E-UTRAN PRACH configuration index		1, 2, 3	53	As specified in table 5.7.1-2 in TS 36.211 [23]
		4, 5, 6	4	
T1	s	1, 2, 3, 4, 5, 6	24	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2	s	1, 2, 3, 4, 5, 6	24	T2 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.6.1.2.4.2-3: Cell specific test parameters for NR cell 1

Parameter	Unit	Test configuration	Cell 1	
			T1	T2
TDD configuration		1, 4	N/A	
		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD	
		2, 5	SR.1.1 TDD	
		3, 6	SR.2.1 TDD	
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD	
		2, 5	CR.1.1 TDD	
		3, 6	CR.2.1 TDD	
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD	
		2, 5	CCR.1.1 TDD	
		3, 6	CCR.2.1 TDD	
SSB configuration		1, 4	SSB.1 FR1	
		2, 5	SSB.1 FR1	
		3, 6	SSB.2 FR1	
SMTC configuration		1, 4	SMTC pattern 2	
		2, 5	SMTC pattern 1	
		3, 6	SMTC pattern 1	
OCNG Pattern		1, 2, 3, 4, 5, 6	OP.1 defined in A.3.2.1	
Initial DL BWP configuration		1, 2, 3, 4, 5, 6	DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3, 4, 5, 6	ULBWP.0.1	
RLM-RS		1, 2, 3, 4, 5, 6	SSB	
Qrxlevmin	dBm/SCS	1, 2, 4, 5	-140	
		3, 6	-137	
N_{oc}	dBm/SCS	1, 4	-98	
		2, 5	-98	
		3, 6	-95	
N_{oc}	dBm/15 kHz	1, 2, 3, 4, 5, 6	-98	
SS-RSRP	dBm/SCS	1, 4	-102	-86
		2, 5	-102	-86
		3, 6	-99	-83
$\hat{E}_s / I_{ot}$	dB	1, 4	-4	12
		2, 5		
		3, 6		
$\hat{E}_s / N_{oc}$	dB	1, 4	-4	12
		2, 5		
		3, 6		
$S_{SearchThresholdP}$	dB	1, 2, 3, 4, 5, 6	32	32
Io	dBm/9.36 MHz	1, 4	-68.60	-57.78
	dBm/9.36 MHz	2, 5	-68.60	-57.78
	dBm/38.16 MHz	3, 6	-62.50	-51.69

Treselection	S	1, 2, 3, 4, 5, 6	0
SnonintrasearchP	dB	1, 2, 3, 4, 5, 6	60
$Thresh_{x, highP}$	dB	1, 2, 3, 4, 5, 6	48
$Thresh_{serving, lowP}$	dB	1, 2, 3, 4, 5, 6	44
$Thresh_{x, lowP (Note 2)}$	dB	1, 2, 3, 4, 5, 6	50
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: This refers to the value of $Thresh_{x, low}$ which is included in NR system information, and is a threshold for the E-UTRA target cell			

Table A.6.1.2.4.2-4: Cell specific test parameters for E-UTRA cell 2

Parameter	Unit	Cell 2	
		T1	T2
E-UTRA RF Channel number		1	
$BW_{channel}$	MHz	10	
OCNG Patterns defined in TS 36.133 [15] clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6	
PBCH_RA	dB	0	
PBCH_RB	dB		
PSS_RA	dB		
SSS_RA	dB		
PCFICH_RB	dB		
PHICH_RA	dB		
PHICH_RB	dB		
PDCCH_RA	dB		
PDCCH_RB	dB		
PDSCH_RA	dB		
PDSCH_RB	dB		
OCNG_RA Note 1	dB		
OCNG_RB Note 1	dB		
Qrxlevmin	dBm	-140	
N_{oc}	dBm/15 kHz	-98	
RSRP	dBm/15 KHz	-84	-84
$\hat{E}_s / I_{ot}$	dB	14	14
$\hat{E}_s / N_{oc}$	dB	14	14
$Treselection_{EUTRAN}$	S	0	
Snonintrasearch	dB	Not sent	
$Thresh_{x, high (Note 2)}$	dB	48	
$Thresh_{serving, low}$	dB	44	
$Thresh_{x, low}$	dB	50	
Propagation Condition		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: This refers to the value of $Thresh_{x, high}$ which is included in E-UTRA system information, and is a threshold for the NR target cell			

A.6.1.2.4.3 Test Requirements

The cell reselection delay to a lower priority E-UTRAN cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the *RRCConnectionRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a lower priority cell shall be less than 17s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a lower priority cell can be expressed as: $T_{evaluate,\ E\text{-}UTRAN} + T_{SI\text{-}E\text{-}UTRA}$,

Where:

$T_{evaluate,\ E\text{-}UTRAN}$ See Table 4.2.2.11.3-1 in clause 4.2.2.11.3

$T_{SI\text{-}E\text{-}UTRA}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 16.64 s, allow 17 s for the cell re-selection delay to a lower priority E-UTRAN cell for UE fulfilling not-at-cell edge criterion.

A.6.1.2.5 Cell reselection to lower priority E-UTRAN cell for UE configured with highSpeedMeasFlag-r16

A.6.1.2.5.1 Test Purpose and Environment

This test is to verify the requirement for the NR to E-UTRAN inter-RAT cell reselection requirements for UE configured with *highSpeedMeasFlag-r16* specified in clause 4.2.2.5 when the E-UTRAN cell is of lower priority.

A.6.1.2.5.2 Test Parameters

The test scenario comprises of one NR cell and one E-UTRAN cell as given in tables A.6.1.2.5.2-1, A.6.1.2.5.2-2, A.6.1.2.5.2-3 and A.6.1.2.5.2-4. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both NR cell 1 and E-UTRAN cell 2 are already identified by the UE prior to the start of the test. E-UTRAN cell 2 is of lower priority than cell 1. The E-UTRAN cell 2 is indicated by NR cell 1 as an HST cell.

Table A.6.1.2.5.2-1: Supported test configurations

Configuration	Description of serving cell	Description of target cell
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
6	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.6.1.2.5.2-2: General test parameters for NR to E-UTRAN cell re-selection test case

Parameter	Unit	Test configuration	Value	Comment

Initial condition	Active cell		1, 2, 3, 4, 5, 6	Cell1	The UE camps on cell 1 in the initial phase.
T1 end condition	Active cell		1, 2, 3, 4, 5, 6	Cell2	The UE shall perform reselection to cell 2 during T1.
	Neighbour cells		1, 2, 3, 4, 5, 6	Cell1	
T2 end condition	Active cell		1, 2, 3, 4, 5, 6	Cell1	The UE shall perform reselection to cell 1 during T2 for iteration of the tests.
	Neighbour cells		1, 2, 3, 4, 5, 6	Cell2	
Access Barring Information		-	1, 2, 3, 4, 5, 6	Not Sent	No additional delays in random access procedure.
DRX cycle length		s	1, 2, 3, 4, 5, 6	0.32	The value shall be used for all cells in the test.
NR PRACH configuration index			1, 2, 3, 4, 5, 6	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
E-UTRAN PRACH configuration index			1, 2, 3	53	As specified in table 5.7.1-2 in TS 36.211 [23]
			4, 5, 6	4	
T1		s	1, 2, 3, 4, 5, 6	15	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2		s	1, 2, 3, 4, 5, 6	75	T2 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.6.1.2.5.2-3: Cell specific test parameters for NR cell 1

Parameter	Unit	Test configuration	Cell 1	
			T1	T2
TDD configuration		1, 4	N/A	
		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD	
		2, 5	SR.1.1 TDD	
		3, 6	SR.2.1 TDD	
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD	
		2, 5	CR.1.1 TDD	
		3, 6	CR.2.1 TDD	
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD	
		2, 5	CCR.1.1 TDD	
		3, 6	CCR.2.1 TDD	
SSB configuration		1, 4	SSB.1 FR1	
		2, 5	SSB.1 FR1	
		3, 6	SSB.2 FR1	
SMTC configuration		1, 4	SMTC pattern 2	
		2, 5	SMTC pattern 1	
		3, 6	SMTC pattern 1	
OCNG Pattern		1, 2, 3, 4, 5, 6	OP.1 defined in A.3.2.1	
Initial DL BWP configuration		1, 2, 3, 4, 5, 6	DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3, 4, 5, 6	ULBWP.0.1	
RLM-RS		1, 2, 3, 4, 5, 6	SSB	
Qrxlevmin	dBm/SCS	1, 2, 4, 5	-140	
		3, 6	-137	
N_{oc}	dBm/SCS	1, 4	-98	
		2, 5	-98	
		3, 6	-95	
N_{oc}	dBm/15 kHz	1, 2, 3, 4, 5, 6	-98	

SS-RSRP	dBm/SCS	1, 4	-102	-86
		2, 5	-102	-86
		3, 6	-99	-83
$\hat{E}_s/I_{ot}$	dB	1, 4	-4	12
		2, 5		
		3, 6		
$\hat{E}_s/N_{oc}$	dB	1, 4	-4	12
		2, 5		
		3, 6		
Io	dBm/9.36 MHz	1, 4	-68.60	-57.78
	dBm/9.36 MHz	2, 5	-68.60	-57.78
	dBm/38.16 MHz	3, 6	-62.50	-51.69
Treselection	S	1, 2, 3, 4, 5, 6	0	
$S_{nonintrasearchP}$	dB	1, 2, 3, 4, 5, 6	50	
$Thresh_{x, highP}$ (Note 2)	dB	1, 2, 3, 4, 5, 6	48	
$Thresh_{serving, lowP}$	dB	1, 2, 3, 4, 5, 6	44	
$Thresh_{x, lowP}$	dB	1, 2, 3, 4, 5, 6	50	
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN 1944Hz Note3	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: This refers to the value of $Thresh_{x, highP}$ which is included in NR system information, and is a threshold for the E-UTRA target cell.
Note 3: The AWGN 1944 Hz condition is a non fading propagation channel with one tap. Doppler shift is a constant 1944 Hz.

Table A.6.1.2.5.2-4: Cell specific test parameters for E-UTRA cell 2

Parameter	Unit	Cell 2	
		T1	T2
E-UTRA RF Channel number		1	
$BW_{channel}$	MHz	10	
OCNG Patterns defined in TS 36.133 [15] clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6	
PBCH_RA	dB	0	
PBCH_RB	dB		
PSS_RA	dB		
SSS_RA	dB		
PCFICH_RB	dB		
PHICH_RA	dB		
PHICH_RB	dB		
PDCCH_RA	dB		
PDCCH_RB	dB		
PDSCH_RA	dB		
PDSCH_RB	dB		
OCNG_RA Note 1	dB		
OCNG_RB Note 1	dB		
Qrxlevmin	dBm	-140	
N_{oc}	dBm/15 kHz	-98	
RSRP	dBm/15 KHz	-84	-84
$\hat{E}_s/I_{ot}$	dB	14	14
$\hat{E}_s/N_{oc}$	dB	14	14

$Treselection_{EUTRAN}$	S	0
$S_{nonintrasearchP}$	dB	Not sent
$Thresh_{x, highP}$ (Note 2)	dB	48
$Thresh_{serving, lowP}$	dB	44
$Thresh_{x, lowP}$	dB	50
Propagation Condition		AWGN 1944Hz
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: This refers to the value of $Thresh_{x, highP}$ which is included in E-UTRA system information, and is a threshold for the NR target cell		

A.6.1.2.5.3 Test Requirements

The cell reselection delay to a lower priority E-UTRAN cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a lower priority cell shall be less than 3 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a lower priority cell can be expressed as: $T_{evaluate, E-UTRAN_HST} + T_{SI-E-UTRA}$,

Where:

$T_{evaluate, E-UTRAN_HST}$ See Table 4.2.2.5-2 in clause 4.2.2.5

$T_{SI-E-UTRA}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 2.24 s, allow 3 s for the cell re-selection delay to a lower priority E-UTRAN cell.

A.6.1.1.7 Void

A.6.2 SA: RRC_INACTIVE state mobility

A.6.2.1 Configured Grant based Small Data Transmissions (CG-SDT)

A.6.2.1.1 Test purpose and Environment

The purpose of this test is to partly verify that the UE properly perform TA validation for CG-SDT transmission in clause 5.5.3. In the test, UE is configured two CG-SDT configurations when entering/during RRC Inactive state. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 repectively. There is one cell, which is the active NR cell in FR1. Figure A.6.2.1.1-1 shows the variation of the RSRP over the duration of the entire test, both sub-tests included.

Prior to the time point TA, the UE shall be fully synchronized to PCell (Cell 1), be registered to the cell and have entered RRC connected mode.

Before starting the test at time point TA, test equipment configures RSRP to P0.

At time point TB, RSRP is changed from P0 to P1.

At time point TC, which is W1 after time point TB, UE expect to receive RRC release with CG SDT configuration and RRC status is changed to INACTIVE status.

At time point TD, RSRP is changed from P1 to P0.

At time point TE, RSRP is changed from P0 to P2. TE must be W2 before TF.

Test equipment triggers UL data arrival at UE lower layer at time point TF. After time point TF, test equipment observes whether UE transmits with CG-SDT within 640ms + Z after TF.

At time point TH, UE expect to receive a RRC release with CG-SDT configurations.

At time point TI, RSRP is changed from P2 to P3, where TI is TH+W1.

Test equipment triggers UL data arrival at UE lower layer at time point TJ.

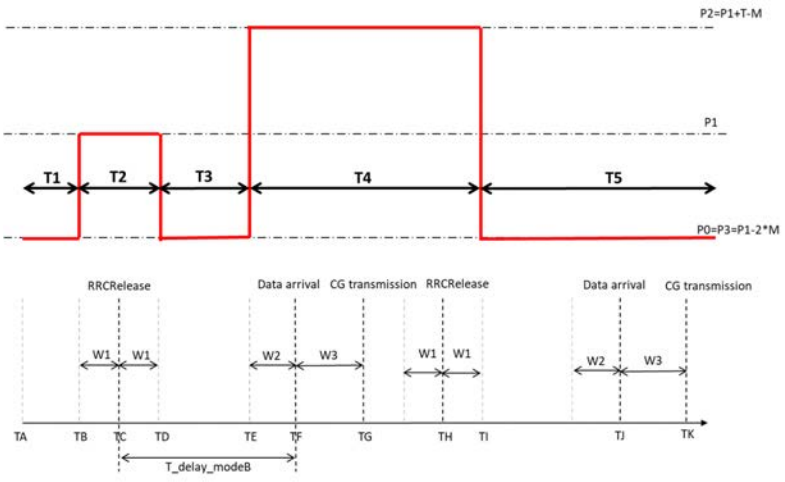

Figure A.6.2.1.1-1: RSRP variation model for CG-SDT testing

A.6.2.1.2 Test Parameters

There is one cells in the test, the FR1 PCell. The test parameters for the PCell are given in Table A.6.2.1.2-1, Table A.6.2.1.2-2, and Table A.6.2.1.2-3.

Table A.6.2.1.2-1: NR configuration for FR1 SSB

Config	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.2.1.2-2 : General test parameters

Parameter	Unit	Test configuration	Value	Comment
TDD Configuration		1	N/A	
		2	TDDConf.1.1	
		3	TDDConf.2.1	

$BW_{channel}$	MHz		10: $N_{RB,c}$ = 52	
PDSCH Reference measurement channel		1	SR.1.1 FDD	
		2	SR.1.1 TDD	
		3	SR.2.1 TDD	
RMSI CORESET Reference Channel		1	CR.1.1 FDD	
		2	CR.1.1 TDD	
		3	CR.2.1 TDD	
Dedicated CORESET Reference Channel		1	CCR.1.1 FDD	
		2	CCR.1.1 TDD	
		3	CCR.2.1 TDD	
SSB configuration		1,2,3	SSB.1 FR1	
OCNG Patterns		1,2,3	OP.1	
Initial BWP Configuration		1,2,3	DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration		1,2,3	DLBWP.1.1 ULBWP.1.1	
SMTC configuration		1,2,3	SMTC.1	
DRX configuration		1,2,3	DRX.7	
T1	s	1,2,3	[TBD]	
T2	s	1,2,3	[TBD]	
T3	s	1,2,3	[TBD]	
T4	s	1,2,3	[TBD]	
T5	s	1,2,3	[2.36]	
cg-SDT-RSRP-ChangeThreshold	dB	1,2,3	[14]	
cg-SDT-RSRP-ThresholdSSB	dBm	1,2,3	– 110dB	
cg-SDT-TimeAlignmentTime		1,2,3	infinity	
CG-SDT resource period	ms		640	configuredGrantConfig Peridocity at 38.331 Config 1,2 : sym640x14, config 3 : sym1024x14
Propagation condition		1,2,3	AWGN	

Table A.6.2.1.2-3: SSB specific test parameters

Parameter	Config	Unit	SSB#0				
			T1	T2	T3	T4	T5
N_{oc}	1,2,3	dBm/15kHz	-100				
N_{oc}	1,2	dBm/SSB SCS	-100				
	3	dBm/SSB SCS	-97				
$\hat{E}_s/I_{ot}$	1,2,3	dB	[0]	[8]	[0]	[18]	[0]
SS RSRP	1,2,3	dBm/SSB SCS	[-100]	[-92]	[-100]	[-82]	[-100]
Io	1,2	dBm/9.36MHz	[-69.04]	[-61.04]	[-69.04]	[-51.04]	[-69.04]
	3	dBm/38.16MHz	[-62.94]	[-54.94]	[-62.94]	[-44.94]	[-62.94]
$\hat{E}_s/N_{oc}$	1,2,3	dB	[0]	[8]	[0]	[12]	[6]

A.6.2.1.3 Test requirements

The UE behaviour in each test during time durations shall be as follows:

During T4, UE shall transmit PUSCH at CG-SDT resource within 640ms + Z after time point TF.

During T5, UE shall not transmit PUSCH at CG-SDT resources after TJ until the end of the test at time point TK.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.3 RRC_CONNECTED state mobility

A.6.3.1 Handover

A.6.3.1.1 Intra-frequency handover from FR1 to FR1; known target cell

A.6.3.1.1.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR1-NR FR1 intra frequency handover requirements specified in clause 6.1.1.2.

A.6.3.1.1.2 Test Parameters

Supported test configurations are shown in table A.6.3.1.1.2-1. Both handover delay and interruption length are tested by using the parameters in table A.6.3.1.1.2-2, and A.6.3.1.1.2-3.

The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE may not have any timing information of cell 2.

NR shall send a RRC message implying handover to cell 2. The RRC message implying handover shall be sent to the UE during period T2, after the UE has reported Event A3. T3 is defined as the end of the last TTI containing the RRC message implying handover.

Table A.6.3.1.1.2-1: Intra-frequency handover from FR1 to FR1 test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.3.1.1.2-2: General test parameters Intra-frequency handover from FR1 to FR1

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
A3-Offset		dB	0	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	≤5	
T3		s	1	

Table A.6.3.1.1.2-3: Cell specific test parameters for NR FR1-FR1 Intra frequency handover test case

Parameter		Unit	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
NR RF Channel Number			1			1		
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
TDD configuration	Config 1		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52					
	Config 2		10: $N_{RB,c}$ = 52					
	Config 3		40: $N_{RB,c}$ = 106					
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52					
	Config 2		10: $N_{RB,c}$ = 52					
	Config 3		40: $N_{RB,c}$ = 106					
DRx Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD					
	Config 2		SR.1.1 TDD					
	Config 3		SR2.1 TDD					
CORESET Reference Channel	Config 1		CR.1.1 FDD					
	Config 2		CR.1.1 TDD					
	Config 3		CR2.1 TDD					
TRS configuration	Config 1		TRS.1.1 FDD					
	Config 2		TRS.1.1 TDD					
	Config 3		TRS.1.2 TDD					
OCNG Patterns			OP.1					
SMTC Configuration			SMTC.1					
SSB Configuration	Config 1,2		SSB.1 FR1					
	Config 3		SSB.2 FR1					
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz					
	Config 3		30 kHz					
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15 kHz					
	Config 3		30 kHz					
PRACH configuration			FR1 PRACH configuration 1					
BWP configuration	Initial DL BWP		DLBWP.0.1					
	Dedicated DL BWP		DLBWP.1.1					
	Initial UL BWP		ULBWP.0.1					
	Dedicated UL BWP		ULBWP.1.1					
EPRE ratio of PSS to SSS		dB	0					
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} Note2		dBm/15kHz	-98					

N_{oc} Note2	Config 1,2	dBm/SCS	-98					
	Config 3		-95					
$\hat{E}_s/I_{ot}$		dB	8	-3.3	-3.3	-Infinity	2.36	2.36
$\hat{E}_s/N_{oc}$		dB	8	8	8	-Infinity	11	11
SSB_RP	Config 1,2	dBm/SCS	-90	-90	-90	-Infinity	-87	-87
	Config 3	dBm/SCS	-87	-87	-87	-Infinity	-84	-84
Io Note3	Config 1,2	dBm/ 9.36MHz	-61.41	-57.06	-57.06	-61.41	-57.06	-57.06
	Config 3	dBm/ 38.16MHz	-55.31	-50.96	-50.96	-55.31	-50.96	-50.96
Propagation condition		-	AWGN			AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.3.1.1.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 72 ms from the beginning of time period T3.
The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2].

$T_{interrupt}$ = 62 ms in the test. $T_{interrupt}$ is defined in clause 6.1.1.2.2.

This gives a total of 72 ms.

A.6.3.1.2 Intra-frequency handover from FR1 to FR1; unknown target cell

A.6.3.1.2.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR1-NR FR1 intra frequency handover requirements specified in clause 6.1.1.2.

A.6.3.1.2.2 Test Parameters

Supported test configurations are shown in table A.6.3.1.2.2-1. Both handover delay and interruption length are tested by using the parameters in table A.6.3.1.2.2-2, and A.6.3.1.2.2-3.

The test scenario comprises of two carriers and one cell on each carrier. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE receives a RRC handover command from the network. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

Table A.6.3.1.2.2-1: Intra-frequency handover from FR1 to FR1 test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode

2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.3.1.2.2-2: General test parameters Intra-frequency handover from FR1 to FR1

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	≤5	

Table A.6.3.1.2.2-3: Cell specific test parameters for NR FR1-FR1 Intra frequency handover test case

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number			1		1	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf. 2.1			
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
DRx Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD			
	Config 2		SR.1.1 TDD			
	Config 3		SR2.1 TDD			
CORESET Reference Channel	Config 1		CR.1.1 FDD			
	Config 2		CR.1.1 TDD			
	Config 3		CR2.1 TDD			
TRS configuration	Config 1		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
OCNG Patterns			OP.1			
SMTC Configuration			SMTC.1			
SSB Configuration	Config 1,2		SSB.1 FR1			
	Config 3		SSB.2 FR1			
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
PRACH configuration			FR1 PRACH configuration 1			

BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-98			
N_{oc} Note2	Config 1,2	dBm/SCS	-98			
	Config 3		-95			
$\hat{E}_s / I_{ot}$		dB	8	-0.64	-Infinity	-0.64
$\hat{E}_s / N_{oc}$		dB	8	8	-Infinity	8
SSB_RP	Config 1,2	dBm/SCS	-90	-90	-Infinity	-90
	Config 3	dBm/SCS	-87	-87	-Infinity	-87
Io Note3	Config 1,2	dBm/ 9.36MHz	-61.41	-58.71	-61.41	-58.71
	Config 3	dBm/ 38.16MHz	-55.31	-52.60	-55.31	-52.60
Propagation condition		-	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.3.1.2.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 92 ms from the beginning of time period T2.
The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2].

$T_{interrupt}$ = 82 ms in the test. $T_{interrupt}$ is defined in clause 6.1.1.2.2.

This gives a total of 92 ms.

A.6.3.1.3 Inter-frequency handover from FR1 to FR1; unknown target cell

A.6.3.1.3.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR1-NR FR1 inter frequency handover requirements specified in clause 6.1.1.2.

A.6.3.1.3.2 Test Parameters

Supported test configurations are shown in table A.6.3.1.3.2-1. Both handover delay and interruption length are tested by using the parameters in table A.6.3.1.3.2-2, and A.6.3.1.3.2-3.

The test scenario comprises of two carriers and one cell on each carrier. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE receives a RRC handover command from the network. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

Table A.6.3.1.3.2-1: Inter-frequency handover from FR1 to FR1 test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.3.1.3.2-2: General test parameters Inter-frequency handover from FR1 to FR1

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
T1		s	5	
T2		s	≤5	

Table A.6.3.1.3.2-3: Cell specific test parameters for NR FR1-FR1 Inter frequency handover test case

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number			1		2	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
TRS configuration	Config 1		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
DRx Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD			
	Config 2		SR.1.1 TDD			
	Config 3		SR2.1 TDD			

CORESET Reference Channel	Config 1		CR.1.1 FDD			
	Config 2		CR.1.1 TDD			
	Config 3		CR2.1 TDD			
OCNG Patterns			OP.1			
SMTC Configuration			SMTC.1			
SSB Configuration	Config 1,2		SSB.1 FR1			
	Config 3		SSB.2 FR1			
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
PRACH configuration			FR1 PRACH configuration 1			
BWP	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-98		-98	
N_{oc} Note2	Config 1,2	dBm/SCS	-98		-98	
	Config 3		-95		-95	
$\hat{E}_s / I_{ot}$		dB	4	4	-Infinity	5
$\hat{E}_s / N_{oc}$		dB	4	4	-Infinity	5
SSB_RP	Config 1,2	dBm/SCS	-94	-94	-Infinity	-93
	Config 3	dBm/SCS	-91	-91	-Infinity	-90
Io Note3	Config 1,2	dBm/9.36MHz	-64.59	-64.59	-70.05	-63.85
	Config 3	dBm/38.16MHz	-58.49	-58.49	-63.94	-57.75
Propagation condition		-	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.3.1.3.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 132 ms from the beginning of time period T2.
The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2].

$T_{interrupt}$ = 122 ms in the test. $T_{interrupt}$ is defined in clause 6.1.1.2.2.

This gives a total of 132 ms.

A.6.3.1.4 SA NR - E-UTRAN handover

A.6.3.1.4.1 Test Purpose and Environment

The purpose of this set of tests is to verify that the UE can make correct inter-RAT E-UTRAN handover when operating in standalone (SA) operation with PCell in FR1. This test shall verify the NR to E-UTRAN handover requirements as specified in clause 6.1.2.1.

The test comprises of one NR carrier and one E-UTRA carrier. There are two cells and one cell on each carrier. Cell 1 is the NR PCell and Cell 2 is an inter-RAT E-UTRAN neighbour cell. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE does not have any timing information of Cell 2. Starting T2, Cell 2 becomes detectable and the UE is expected to detect and send a measurement report. Gap pattern configuration with id #0 as specified in Table 9.1.2-1 is configured before T2 begins to enable inter-RAT frequency monitoring.

A RRC message implying handover shall be sent to the UE during period T2 after the UE has reported Event B2. The start of T3 is the next instant after the last TTI containing the RRC message implying handover is sent to the UE. The handover message shall contain Cell 2 as the target cell.

Supported test configurations are shown in table A.6.3.1.4-1. General test parameters are provided in Table A.6.3.1.4-2. Cell specific test parameters for Cell 1 and Cell 2 are provided in Tables A.6.3.1.4-3 and A.6.3.1.4-4 respectively.

Table A.6.3.1.4-1: Supported test configurations for SA inter-RAT E-UTRAN handover tests

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.3.1.4-2: General test parameters for SA inter-RAT E-UTRAN handover

Parameter		Unit	Value	Comment
NR RF Channel Number			1	1 NR carrier frequency is used in the test
LTE RF Channel Number			2	1 E-UTRAN carrier frequency is used in the test
Initial conditions	Active cell		Cell 1	NR cell
	Neighbouring cell		Cell 2	E-UTRAN cell
Final condition	Active cell		Cell 2	
NR measurement quantity			SS-RSRP	
E-UTRAN measurement quantity			RSRP	
b2-Threshold1		dBm	As specified in Table A.6.3.1.4-3	Absolute NR SS-RSRP threshold for event B2
b2-Threshold2EUTRAN		dBm	-98	Absolute E-UTRAN RSRP threshold for event B2
Hysteresis		dB	0	
TimeToTrigger		s	0	
Filter coefficient			0	L3 filtering is not used

DRX		OFF	Non-DRX test
Access Barring Information	-	Not sent	No additional delays in random access procedure
Time offset between cells		3 ms	Asynchronous cells
Gap pattern configuration Id		0	As specified in Table 9.1.2-1 started before T2 starts
T1	s	5	
T2	s	≤5	
T3	s	1	

Table A.6.3.1.4-3: Cell specific test parameters for SA inter-RAT E-UTRA handover (Cell 1)

Parameter		Unit	Configuration	Cell 1		
				T1	T2	T3
RF channel number			1, 2, 3, 4, 5, 6	1		
Duplex mode			1, 4	FDD		
			2, 3, 5, 6	TDD		
TDD Configuration			2, 5	TDDConf.1.1		
			3, 6	TDDConf.2.1		
$BW_{channel}$		MHz	1, 4	10: $N_{RB,c}$ = 52 (FDD)		
			2, 5	10: $N_{RB,c}$ = 52 (TDD)		
			3, 6	40: $N_{RB,c}$ = 106 (TDD)		
PDSCH reference measurement channel			1, 4	SR.1.1 FDD		
			2, 5	SR.1.1 TDD		
			3, 6	SR.2.1 TDD		
CORSET reference channel			1, 4	CR.1.1 FDD		
			2, 5	CR.1.1 TDD		
			3, 6	CR.2.1 TDD		
TRS configuration			1, 4	TRS.1.1 FDD		
			2, 5	TRS.1.1 TDD		
			3, 6	TRS.1.2 TDD		
OCNG pattern[Note1]			1, 2, 3, 4, 5, 6	OP.1		
BWP	Initial DL BWP		1, 2, 3, 4, 5, 6	DLBWP.0.1		
	Dedicated DL BWP			DLBWP.1.1		
	Initial UL BWP			ULBWP.0.1		
	Dedicated UL BWP			ULBWP.1.1		
SMTC configuration			1, 2, 3, 4, 5, 6	SMTC.1		
SSB configuration			1, 2, 4, 5	SSB.1 FR1		
			3, 6	SSB.2 FR1		
b2-Threshold1		dBm	1, 2, 4, 5	-96		
			3, 6	-93		
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4, 5, 6	0		
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						
EPRE ratio of PDCCH to PDCCH_DMRS						
EPRE ratio of PDSCH_DMRS to SSS						
EPRE ratio of PDSCH to PDSCH_DMRS						
EPRE ratio of OCNG DMRS to SSS						
EPRE ratio of OCNG to OCNG DMRS						

N_{oc}[Note2]	dBm/15 KHz	1, 2, 3, 4, 5, 6	-100	-104	-100
N_{oc}[Note2]	dBm/SCS	1, 2, 4, 5	-100	-104	-100
		3, 6	-97	-101	-97
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	12	0	0
$\hat{E}_s/I_{ot}$[Note3]	dB	1, 2, 3, 4, 5, 6	12	0	0
SS-RSRP[Note3]	dBm/SCS	1, 2, 4, 5	-88	-104	-104
		3, 6	-85	-101	-101
Io[Note3]	dBm/9.36 MHz	1, 2, 4, 5	-59.78	-73.04	-69.04
	dBm/38.16 MHz	3, 6	-53.68	-66.9448	-64.19
Propagation condition		1, 2, 3, 4, 5, 6	AWGN		
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x2 Low		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.6.3.1.4-4: Cell specific test parameters for SA inter-RAT E-UTRA handover (Cell 2)

Parameter	Unit	Configuration	Cell 2		
			T1	T2	T3
RF channel number		1, 2, 3, 4, 5, 6	2		
Duplex mode		1, 2, 3	FDD		
		4, 5, 6	TDD		
TDD special subframe configuration[Note1]		4, 5, 6	6		
TDD uplink-downlink configuration[Note1]		4, 5, 6	1		
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100		
PRACH Configuration[Note2]		1, 2, 3	4		
		4, 5, 6	53		
PDSCH parameters: DL Reference Measurement Channel[Note3]		1, 2, 3	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD		
		4, 5, 6	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD		
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note3]		1, 2, 3	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD		
		4, 5, 6	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD		
OCNG Patterns[Note3]		1, 2, 3	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD		
		4, 5, 6	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD		

PBCH_RA	dB	1, 2, 3, 4, 5, 6	0		
PBCH_RB					
PSS_RA					
SSS_RA					
PCFICH_RB					
PHICH_RA					
PHICH_RB					
PDCCH_RA					
PDCCH_RB					
PDSCH_RA					
PDSCH_RB					
OCNG_RA Note4					
OCNG_RB Note4					
N_{oc} Note5	dBm/15kHz	1, 2, 3, 4, 5, 6	-98		
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	-Infinity	8	78
$\hat{E}_s/I_{ot}$ Note6	dB	1, 2, 3, 4, 5, 6	-Infinity	78	78
RSRP Note6	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-90	-90
SCH_RP Note6	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-90	-90
Io Note6	dBm/9MHz	1, 2, 3, 4, 5, 6	-67.21 +10log($N_{RB,c}$/100)	-58.57 +10log($N_{RB,c}$/100)	-58.57 +10log($N_{RB,c}$/100)
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN		
Antenna Configuration and Correlation Matrix Note7		1, 2, 3, 4, 5, 6	1x2 Low		

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [23].
Note 3: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 4: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 6: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 7: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].

A.6.3.1.4.2 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 85 ms from the beginning of time period T3.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 50 ms and is specified in clause 6.1.2.1.

$T_{interrupt}$ = 35 ms in the test; $T_{interrupt}$ is defined in clause 6.1.2.1.

This gives a total of 85 ms.

A.6.3.1.5 SA NR - E-UTRAN handover with unknown target cell

A.6.3.1.5.1 Test Purpose and Environment

The purpose of this set of tests is to verify that the UE can make correct inter-RAT E-UTRAN handover when operating in standalone (SA) operation with PCell in FR1. This test shall verify the NR to E-UTRAN handover requirements for the case when the target E-UTRAN cell is unknown as specified in clause 6.1.2.1.

The test comprises of one NR carrier and one E-UTRA carrier. There are two cells and one cell on each carrier. Cell 1 is the NR PCell and Cell 2 is an inter-RAT E-UTRAN neighbour cell. The test consists of two successive time

periods, with time durations of T1 and T2 respectively. At the start of time duration T1, the UE does not have any timing information of Cell 2. Starting T2, Cell 2 becomes detectable. No Gap pattern shall be configured.

A RRC message implying handover shall be sent to the UE during period T1. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE. The handover message shall contain Cell 2 as the target cell.

Supported test configurations are shown in table A.6.3.1.5-1. General test parameters are provided in Table A.6.3.1.5-2. Cell specific test parameters for Cell 1 and Cell 2 are provided in Tables A.6.3.1.5-3 and A.6.3.1.5-4 respectively.

Table A.6.3.1.5-1: Supported test configurations for SA inter-RAT E-UTRAN handover tests

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.3.1.5-2: General test parameters for SA inter-RAT E-UTRAN handover

Parameter		Unit	Value	Comment
NR RF Channel Number			1	1 NR carrier frequency is used in the test
LTE RF Channel Number			2	1 E-UTRAN carrier frequency is used in the test
Initial conditions	Active cell		Cell 1	NR cell
	Neighbouring cell		Cell 2	E-UTRAN cell
Final condition	Active cell		Cell 2	
NR measurement quantity			SS-RSRP	
DRX			OFF	Non-DRX test
Access Barring Information		-	Not sent	No additional delays in random access procedure
Time offset between cells			3 ms	Asynchronous cells
T1		s	≤5	
T2		s	1	

Table A.6.3.1.5-3: Cell specific test parameters for SA inter-RAT E-UTRA handover (Cell 1)

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6	1	
Duplex mode		1, 4	FDD	
		2, 3, 5, 6	TDD	
TDD Configuration		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	
$BW_{channel}$	MHz	1, 4	10: $N_{RB,c}$ = 52 (FDD)	
		2, 5	10: $N_{RB,c}$ = 52 (TDD)	
		3, 6	40: $N_{RB,c}$ = 106 (TDD)	
PDSCH reference measurement channel		1, 4	SR.1.1 FDD	
		2, 5	SR.1.1 TDD	
		3, 6	SR.2.1 TDD	
CORSET reference channel		1, 4	CR.1.1 FDD	
		2, 5	CR.1.1 TDD	

			3, 6	CR.2.1 TDD	
TRS configuration			1, 4	TRS.1.1 FDD	
			2, 5	TRS.1.1 TDD	
			3, 6	TRS.1.2 TDD	
OCNG pattern[Note1]			1, 2, 3, 4, 5, 6	OP.1	
BWP	Initial DL BWP		1, 2, 3, 4, 5, 6	DLBWP.0.1	
	Dedicated DL BWP			DLBWP.1.1	
	Initial UL BWP			ULBWP.0.1	
	Dedicated UL BWP			ULBWP.1.1	
SMTC configuration			1, 2, 3, 4, 5, 6	SMTC.1	
SSB configuration			1, 2, 4, 5	SSB.1 FR1	
			3, 6	SSB.2 FR1	
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4, 5, 6	0	
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS					
EPRE ratio of OCNG to OCNG DMRS					
N_{oc}[Note2]		dBm/15 KHz	1, 2, 3, 4, 5, 6	-98	
N_{oc}[Note2]		dBm/SCS	1, 2, 4, 5	-98	
			3, 6	-95	
$\hat{E}_s/N_{oc}$		dB	1, 2, 3, 4, 5, 6	0	0
$\hat{E}_s/I_{ot}$[Note3]		dB	1, 2, 3, 4, 5, 6	0	0
SS-RSRP[Note3]		dBm/SCS	1, 2, 4, 5	-98	-98
			3, 6	-95	-95
Io[Note3]		dBm/9.36 MHz	1, 2, 4, 5	-67.04	-67.04
		dBm/38.16 MHz	3, 6	-60.94	-60.94
Propagation condition			1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix			1, 2, 3, 4, 5, 6	1x2 Low	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.6.3.1.5-4: Cell specific test parameters for SA inter-RAT E-UTRA handover (Cell 2)

Parameter	Unit	Configuration	Cell 2	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6	2	
Duplex mode		1, 2, 3	FDD	

		4, 5, 6	TDD	
TDD special subframe configuration[Note1]		4, 5, 6	6	
TDD uplink-downlink configuration[Note1]		4, 5, 6	1	
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PRACH Configuration[Note2]		1, 2, 3	4	
		4, 5, 6	53	
PDSCH parameters: DL Reference Measurement Channel[Note3]		1, 2, 3	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note3]		1, 2, 3	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note3]		1, 2, 3	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note4]				
OCNG_RB[Note4]				
N_{oc}[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6	-98	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	-Infinity	7
$\hat{E}_s/I_{ot}$[Note6]	dB	1, 2, 3, 4, 5, 6	-Infinity	7
RSRP[Note6]	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-91
SCH_RP[Note6]	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-91
Io[Note6]	dBm/9MHz	1, 2, 3, 4, 5, 6	-70.22	-62.43
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix [Note7]		1, 2, 3, 4, 5, 6	1x2 Low	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [23].
Note 3: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 4: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 6: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 7: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].

A.6.3.1.5.2 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 165 ms from the beginning of time period T2.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 50 ms and is specified in clause 6.1.2.1.

$T_{interrupt}$ = 115 ms in the test; $T_{interrupt}$ is defined in clause 6.1.2.1.

This gives a total of 165 ms.

A.6.3.1.6 SA NR - UTRAN FDD handover

A.6.3.1.6.1 Test Purpose and Environment

The purpose of this set of tests is to verify that the UE can make correct inter-RAT UTRAN FDD handover when operating in standalone (SA) operation with PCell in FR1. This test shall verify the NR to UTRAN FDD handover requirements as specified in clause 6.1.2.2.1.

The test comprises of one NR carrier and one UTRA FDD carrier. There are two cells and one cell on each carrier. Cell 1 is the NR PCell and Cell 2 is an inter-RAT UTRAN FDD neighbour cell. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE does not have any timing information of Cell 2. Starting T2, Cell 2 becomes detectable and the UE is expected to detect and send a measurement report. Gap pattern configuration with id #0 as specified in Table 9.1.2-1 is configured before T2 begins to enable inter-RAT frequency monitoring.

A RRC message implying handover shall be sent to the UE during period T2 after the UE has reported Event B2. The start of T3 is the instant when the last TTI containing the RRC message implying handover is sent to the UE. The handover message shall contain Cell 2 as the target cell.

Supported test configurations are shown in table A.6.3.1.6-1. General test parameters are provided in Table A.6.3.1.6-2. Cell specific test parameters for Cell 1 and Cell 2 are provided in Tables A.6.3.1.6-3 and A.6.3.1.6-4 respectively.

Table A.6.3.1.6-1: Supported test configurations for SA inter-RAT UTRAN FDD handover tests

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, UTRAN FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, UTRAN FDD
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, UTRAN FDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.3.1.6-2: General test parameters for SA inter-RAT UTRAN FDD handover

Parameter		Unit	Value	Comment
NR RF Channel Number			1	1 NR carrier frequency is used in the test
UTRA RF Channel Number			2	1 UTRAN carrier frequency is used in the test
Initial conditions	Active cell		Cell 1	NR cell
	Neighbouring cell		Cell 2	UTRAN cell
Final condition	Active cell		Cell 2	
NR measurement quantity			SS-RSRP	

Inter-RAT (UTRAN FDD) measurement quantity		CPICH Ec/N0	
b2-Threshold1	dBm	As specified in Table A.6.3.1.6-3	Absolute NR SS-RSRP threshold for event B2
b2-Threshold2UTRA-FDD	dB	-18	Absolute UTRAN CPICH Ec/Io threshold for event B2
Hysteresis	dB	0	
TimeToTrigger	s	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	Non-DRX test
Access Barring Information	-	Not sent	No additional delays in random access procedure
Time offset between cells		3 ms	Asynchronous cells
Gap pattern configuration Id		0	As specified in Table 9.1.2-1 started before T2 starts
T1	s	5	
T2	s	≤5	
T3	s	1	

Table A.6.3.1.6-3: Cell specific test parameters for SA inter-RAT UTRAN FDD handover (Cell 1)

Parameter		Unit	Configuration	Cell 1		
				T1	T2	T3
RF channel number			1, 2, 3	1		
Duplex mode			1	FDD		
			2, 3	TDD		
TDD Configuration			2	TDDConf.1.1		
			3	TDDConf.2.1		
$BW_{channel}$		MHz	1	10: $N_{RB,c}$ = 52 (FDD)		
			2	10: $N_{RB,c}$ = 52 (TDD)		
			3	40: $N_{RB,c}$ = 106 (TDD)		
PDSCH reference measurement channel			1	SR.1.1 FDD		
			2	SR.1.1 TDD		
			3	SR.2.1 TDD		
CORSET reference channel			1	CR.1.1 FDD		
			2	CR.1.1 TDD		
			3	CR.2.1 TDD		
TRS configuration			1	TRS.1.1 FDD		
			2	TRS.1.1 TDD		
			3	TRS.1.2 TDD		
OCNG pattern[Note1]			1, 2, 3	OP.1		
BWP	Initial DL BWP		1, 2, 3	DLBWP.0.1		
	Dedicated DL BWP			DLBWP.1.1		
	Initial UL BWP			ULBWP.0.1		
	Dedicated UL BWP			ULBWP.1.1		
SMTC configuration			1, 2, 3	SMTC.1		
SSB configuration			1, 2	SSB.1 FR1		
			3	SSB.2 FR1		
b2-Threshold1		dBm	1, 2	-96		
			3	-93		
EPRE ratio of PSS to SSS		dB	1, 2, 3	0		
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						

EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS					
EPRE ratio of OCNG to OCNG DMRS					
N_{oc} Note2	dBm/15 KHz	1, 2, 3	-100		
N_{oc} Note2	dBm/SCS	1, 2,	-100		
		3	-97		
$\hat{E}_s/N_{oc}$	dB	1, 2, 3	12	-4	-4
$\hat{E}_s/I_{ot}$ Note3	dB	1, 2, 3	12	-4	-4
SS-RSRP Note3	dBm/SCS	1, 2	-88	-104	-104
		3	-85	-101	-101
Io Note3	dBm/9.36 MHz	1, 2	-59.78	-70.59	-70.59
	dBm/38.16 MHz	3	-53.68	-64.49	-64.49
Propagation condition		1, 2, 3	AWGN		
Antenna Configuration and Correlation Matrix		1, 2, 3	1x2 Low		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					

Table A.6.3.1.6-4: Cell specific test parameters for SA inter-RAT UTRAN FDD handover (Cell 2)

Parameter	Unit	Cell 2 (UTRA)		
		T1	T2	T3
UTRA RF Channel Number		2		
CPICH_Ec/Ior	dB	-10		
PCCPCH_Ec/Ior	dB	-12		
SCH_Ec/Ior	dB	-12		
PICH_Ec/Ior	dB	-15		
DCH_Ec/Ior	dB	N/A	N/A	Note 1
OCNS_Ec/Ior	dB	-0.941	0.941	Note 2
$\hat{I}_{or}/I_{oc}$	dB	-infinity	-1.8	-1.8
I_{oc}	dBm/3,84 MHz	-70	-70	-70
CPICH_Ec/Io	dB	-infinity	-14	-14
Propagation Condition		AWGN		
Note 1: The DPCH level is controlled by the power control loop Note 2: The power of the OCNS channel that is added shall make the total power from the cell to be equal to I_{or}.				

A.6.3.1.6.2 Test Requirements

The UE shall start to transmit the UL DPCCH to Cell 2 less than 190 ms from the beginning of time period T3.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 50 ms, which is specified in clause 5.3.1.1.1.

$T_{interrupt}$ = 140 ms in the test; $T_{interrupt}$ is defined in clause 5.3.1.1.2. This gives a total of 190 ms.

A.6.3.1.7 Intra-frequency synchronous DAPS handover in FR1

A.6.3.1.7.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR1-NR FR1 intra frequency DAPS handover requirements in synchronous scenario specified in clause 6.1.3.2.

A.6.3.1.7.2 Test Parameters

Supported test configurations are shown in Table A.6.3.1.7.2-1. Both handover delay and interruption length are tested by using the parameters in Table A.6.3.1.7.2-2, and A.6.3.1.7.2-3.The test consists of five successive time periods, with time durations of T1, T2, T3, T4, and T5 respectively.

Before the start of T1, the UE is connected to the cell1 and not aware of the cell2. The UE shall be configured with periodic CSI reporting for cell1. During T1, the UE does not have any timing information of the cell2.

Starting T2, the cell2 becomes detectable. During T2, the UE performs cell detection and measurements on the cell2 and shall send event report to the network. After receiving the event report A3, the network sends a RRC message implying DAPS handover to the UE.

The start of T3 is the instant when the last TTI containing DAPS handover command is sent to the UE. During T3, UE shall be able to perform random access, DL reception or UL transmission in the cell2 while the DL scheduling and UL feedback in the cell1 shall be avoided. After successful RACH procedure of the cell2, UE is scheduled with PDSCH from cell1 and cell2 in alternative TTIs where both cell1 and cell2 belong to the same TAG. In the end the network sends a RRC message implying cell1 release to the UE. During T3, the handover delay $D_{handover1}$ for target cell addition need to be verified.

The start of T4 is the instant when the last TTI containing cell1 release command is sent to the UE. During T4, the UE shall accomplish the release actions within $D_{handover2}$.

Starting T5, the UE stops sending the periodical CSI report to the cell1.

Table A.6.3.1.7.2-1: Intra-frequency DAPS handover in FR1 test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.3.1.7.2-2: General test parameters synchronous Intra-frequency DAPS handover in FR1

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
A3-Offset		dB	0	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.

Time offset between cells		3 μs	Synchronous cells
T1	s	5	
T2	s	≤5	
T3	s	1	
T4	ms	$D_{handover2}$	$D_{Handover2}$ is defined in clause 6.1.3.2.1
T5	ms	100	

Table A.6.3.1.7.2-3: Cell specific test parameters for NR FR1-FR1 Intra frequency DAPS handover test case

Parameter		Unit	Cell 1		Cell 2	
			T1	T2 - T5	T1	T2 - T5
NR RF Channel Number			1		1	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
DRX Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD			
	Config 2		SR.1.1 TDD			
	Config 3		SR.2.1 TDD			
CORESET Reference Channel	Config 1		CR.1.1 FDD			
	Config 2		CR.1.1 TDD			
	Config 3		CR.2.1 TDD			
TRS configuration	Config 1		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
OCNG Patterns			OP.1			
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD			
	Config 2		CSI-RS.1.1 TDD			
	Config 3		CSI-RS.2.1 TDD			
reportConfigType			periodic		N/A	
reportQuantity			cri-RI-PMI-CQI		N/A	
CSI reporting periodicity	Config 1,2	slot	5		N/A	
	Config 3		10		N/A	
CSI reporting offset	Config 1,2	slot	3		N/A	
	Config 3		5		N/A	
SMTC Configuration			SMTC.1			
SSB Configuration	Config 1,2		SSB.1 FR1			
	Config 3		SSB.2 FR1			
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
PRACH configuration			FR1 PRACH configuration 1			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0			

EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-98			
N_{oc} Note2	Config 1,2	dBm/SCS	-98			
	Config 3		-95			
$\hat{E}_s / I_{ot}$		dB	8	-1.5	-Infinity	0.36
$\hat{E}_s / N_{oc}$		dB	8	8	-Infinity	9
SSB_RP	Config 1,2	dBm/SCS	-90	-90	-Infinity	-89
	Config 3	dBm/SCS	-87	-87	-Infinity	-86
Io Note3	Config 1,2	dBm/ 9.36MHz	-61.41	-58.21	-61.41	-58.21
	Config 3	dBm/ 38.16MHz	-55.31	-52.11	-55.31	-52.11
Propagation condition			AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.3.1.7.3 Test Requirements

The UE shall start to transmit the PRACH to cell 2 less than 72 ms from the beginning of time period T3.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The target cell add delay $D_{handover1}$ can be expressed as: $T_{RRC_procedure} + T_{search} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin}$, where:

$T_{RRC_procedure}$ = 10 ms and is specified in clause 12 in TS 38.331 [2].

T_{search}, T_{IU}, $T_{processing}$, T_{Δ} and T_{margin} are defined in clause 6.1.1.2.2.

If the target cell is known, then T_{search} = 0 ms

T_{IU} = 20 ms in the test. T_{IU} is defined in clause 6.1.1.2.2.

T_{Δ} = 20 ms in the test. T_{Δ} is defined in clause 6.1.1.2.2.

$T_{processing}$ = 20 ms in the test. $T_{processing}$ is defined in clause 6.1.1.2.2.

T_{margin} = 2 ms in the test. T_{margin} is defined in clause 6.1.1.2.2.

This gives a total of 72 ms.

After successful RACH to cell 2 and until the start of time period T4, UE shall be able to receive PDSCH alternatively from cell 1 and cell 2. UE is not expected to transmit UL to both cell 1 and cell 2 in the same TTI.

The UE shall release cell 1 less than $D_{handover2} = (T_{RRC_procedure} + T_{interrupt2})$ from the beginning of time period T4.

NOTE: $D_{handover2}$ is defined in clause 6.1.3.2.1.

$T_{RRC_procedure}$ = 10 ms and is specified in clause 12 in TS 38.331 [2].

$T_{interrupt2}$ is defined in clause 6.1.3.2.2.

UE shall not report CSI to cell 1 during T5.

A.6.3.1.8 Intra-frequency asynchronous DAPS handover in FR1

A.6.3.1.8.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR1-NR FR1 intra frequency DAPS handover requirements in asynchronous scenario specified in clause 6.1.3.2.

A.6.3.1.8.2 Test Parameters

Supported test configurations are shown in Table A.6.3.1.8.2-1. Both handover delay and interruption length are tested by using the parameters in Table A.6.3.1.8.2-2, and A.6.3.1.8.2-3.

The test consists of five successive time periods, with time durations of T1, T2, T3, T4, and T5 respectively.

Before the start of T1, the UE is connected to the cell1 and not aware of the cell2. The UE shall be configured with periodic CSI reporting for cell1. During T1, the UE does not have any timing information of the cell2.

Starting T2, the cell2 becomes detectable. During T2, the UE performs cell detection and measurements on the cell2 and shall send event report to the network. After receiving the event report A3, the network sends a RRC message implying DAPS handover to the UE.

The start of T3 is the instant when the last TTI containing DAPS handover command is sent to the UE. During T3, UE shall be able to perform random access, DL reception or UL transmission in the cell2 while the DL scheduling and UL feedback in the cell1 shall be avoided. After successful RACH procedure of the cell2, UE is scheduled with PDSCH from cell1 and cell2 in alternative TTIs where both cell1 and cell2 belong to the same TAG. In the end the network sends a RRC message implying cell1 release to the UE. During T3, the handover delay $D_{handover1}$ for target cell addition needs to be verified.

The start of T4 is the instant when the last TTI containing cell1 release command is sent to the UE by cell2. During T4, the UE shall accomplish the release actions within $D_{handover2}$.

Starting T5, the UE stops sending the periodical CSI report to the cell1.

Table A.6.3.1.8.2-1: Intra-frequency DAPS handover in FR1 test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.3.1.8.2-2: General test parameters Intra-frequency asynchronous DAPS handover in FR1

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
A3-Offset		dB	0	
Hysteresis		dB	0	
Time To Trigger		s	0	

Filter coefficient		0	L3 filtering is not used
Access Barring Information	-	Not Sent	No additional delays in random access procedure.
Time offset between cells		7 µs	Asynchronous cells
T1	s	5	
T2	s	≤5	
T3	s	1	
T4	ms	$D_{handover2}$	$D_{Handover2}$ is defined in clause 6.1.3.2.1
T5	ms	100	

Table A.6.3.1.8.2-3: Cell specific test parameters for NR FR1-FR1 Intra frequency DAPS handover test case

Parameter		Unit	Cell 1		Cell 2	
			T1	T2 - T5	T1	T2 - T5
NR RF Channel Number			1		1	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
$BW_{channel}$	Config 1,2	MHz	10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
BWP BW	Config 1,2	MHz	10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
DRX Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD			
	Config 2		SR.1.1 TDD			
	Config 3		SR.2.1 TDD			
CORESET Reference Channel	Config 1		CR.1.1 FDD			
	Config 2		CR.1.1 TDD			
	Config 3		CR.2.1 FDD			
TRS configuration	Config 1		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
OCNG Patterns			OP.1			
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD			
	Config 2		CSI-RS.1.1 TDD			
	Config 3		CSI-RS.2.1 TDD			
reportConfigType			periodic		N/A	
reportQuantity			cri-RI-PMI-CQI		N/A	
CSI reporting periodicity	Config 1,2	slot	5		N/A	
	Config 3		10		N/A	
CSI reporting offset	Config 1,2	slot	3		N/A	
	Config 3		5		N/A	
SMTC Configuration			SMTC.1			
SSB Configuration	Config 1,2		SSB.1 FR1			
	Config 3		SSB.2 FR1			
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15			
	Config 3		30			
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15			
	Config 3		30			
PRACH configuration			FR1 PRACH configuration 1			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			

	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-98			
N_{oc} Note2	Config 1,2	dBm/SCS	-98			
	Config 3		-95			
$\hat{E}_s / I_{ot}$		dB	8	-1.5	-Infinity	0.36
$\hat{E}_s / N_{oc}$		dB	8	8	-Infinity	9
SSB_RP	Config 1,2	dBm/SCS	-90	-90	-Infinity	-89
	Config 3		-87	-87	-Infinity	-86
Io Note3	Config 1,2	dBm/ 9.36MHz	-61.41	-58.21	-61.41	-58.21
	Config 3	dBm/ 38.16MHz	-55.31	-52.11	-55.31	-52.11
Propagation condition			AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.3.1.8.3 Test Requirements

The UE shall start to transmit the PRACH to cell 2 less than 72 ms from the beginning of time period T3.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The target cell add delay $D_{handover1}$ can be expressed as: $T_{RRC_procedure} + T_{search} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin}$, where:

$T_{RRC_procedure}$ = 10 ms and is specified in clause 12 in TS 38.331 [2].

T_{search}, T_{IU}, $T_{processing}$, T_{Δ} and T_{margin} are defined in clause 6.1.1.2.2.

If the target cell is known, then T_{search} = 0 ms

T_{IU} = 20 ms in the test. T_{IU} is defined in clause 6.1.1.2.2.

T_{Δ} = 20 ms in the test. T_{Δ} is defined in clause 6.1.1.2.2.

$T_{processing}$ = 20 ms in the test. $T_{processing}$ is defined in clause 6.1.1.2.2.

T_{margin} = 2 ms in the test. T_{margin} is defined in clause 6.1.1.2.2.

This gives a total of 72 ms.

After successful RACH to cell 2 and until the start of time period T4, UE shall be able to receive PDSCH alternatively from cell 1 and cell 2. UE is not expected to transmit UL to both cell 1 and cell 2 in the same TTI.

The UE shall release cell 1 less than $D_{handover2}$ = ($T_{RRC_procedure}$ + $T_{interrupt2}$) from the beginning of time period T4.

NOTE: $D_{handover2}$ is defined in clause 6.1.3.2.1.

$T_{RRC_procedure}$ = 10 ms and is specified in clause 12 in TS 38.331 [2].

$T_{interrupt2}$ is defined in clause 6.1.3.2.2.

UE shall not report CSI to cell 1 during T5.

A.6.3.1.9 Intra-band inter-frequency synchronous DAPS handover test in SA for FR1

A.6.3.1.9.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR1-NR FR1 intra-band inter-frequency synchronous DAPS handover requirements specified in clause 6.1.3.2.

A.6.3.1.9.2 Test Parameters

Supported test configurations are shown in table A.6.3.1.9.2-1. Both handover delay and interruption length are tested by using the parameters in table A.6.3.1.9.2-2, and A.6.3.1.9.2-3.

The test consists of five successive time periods, with time durations of T1, T2, T3, T4 and T5 respectively. At the start of time duration T1, the UE may not have any timing information of cell 2. The UE shall be configured with periodic CSI reporting for cell1. The test scenario comprises of two carriers and one cell on each carrier. Gap pattern ID gp0 as specified in Table 9.1.2-1 is configured before T2 in the test case.

Starting T2, Cell 2 becomes known to the UE. During T2, the UE shall report Event A3. After receiving the Event A3, the test system shall send a RRC message implying DAPS handover to the UE.

T3 is defined as the end of the last TTI containing the RRC message implying DAPS handover. During T3 UE shall be able to perform random access to cell 2. Cell 1 is continuously scheduled in DL during T3. DL schedule and UL feedback to cell 1 shall be avoided when UE is required to perfrom DL reception or UL transmission in PRACH procedure in cell 2, except preamble transmission. At the end of T3 cell 2 shall send an RRC message implying cell 1 release command.

T4 is defined as the end of the last TTI containing the RRC message implying DAPS handover. Cell 2 is continuously scheduled in DL during T4. During T4, the UE shall perform source cell release.

Starting T5, the UE shall stop sending CSI report to the source cell. And the test system shall observe the periodic reporting of CSI for cell 1 during T5.

Table A.6.3.1.9.2-1: Intra-band inter-frequency synchronous DAPS handover in SA for FR1 test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.3.1.9.2-2: General test parameters for intra-band inter-frequency synchronous DAPS handover test in SA for FR1

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	

	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
A3-Offset		dB	0	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			0 μs	Synchronous cells
T1		s	5	
T2		s	≤5	
T3		s	1	
T4		ms	10 + $T_{interrupt2}$	$T_{interrupt2}$ is defined in clause 6.1.3.2.2 Table 6.1.3.2.2-5
T5		ms	100	

Table A.6.3.1.9.2-3: Cell specific test parameters for intra-band inter-frequency synchronous DAPS handover test in SA for FR1

Parameter		Unit	Cell 1		Cell 2	
			T1	T2 - T5	T1	T2 - T5
NR RF Channel Number			1		2	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
DRX Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD			
	Config 2		SR.1.1 TDD			
	Config 3		SR.2.1 TDD			
CORESET Reference Channel	Config 1		CR.1.1 FDD			
	Config 2		CR.1.1 TDD			
	Config 3		CR.2.1 TDD			
TRS configuration	Config 1		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
OCNG Patterns			OP.1			
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD			
	Config 2		CSI-RS.1.1 TDD			
	Config 3		CSI-RS.2.1 TDD			
reportConfigType			periodic		N/A	
reportQuantity			cri-RI-PMI-CQI		N/A	
CSI reporting periodicity	Config 1,2	slot	5		N/A	
	Config 3		10		N/A	
CSI reporting offset	Config 1,2	slot	3		N/A	
	Config 3		5		N/A	
SMTC Configuration			SMTC.1			
SSB Configuration	Config 1,2		SSB.1 FR1			
	Config 3		SSB.2 FR1			
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			

PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
PRACH configuration			FR1 PRACH configuration 1			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-98			
N_{oc} Note2	Config 1,2	dBm/SCS	-98			
	Config 3		-95			
$\hat{E}_s / I_{ot}$		dB	8	8	-Infinity	8
$\hat{E}_s / N_{oc}$		dB	8	8	-Infinity	8
SSB_RP	Config 1,2	dBm/SCS	-90	-90	-Infinity	-90
	Config 3	dBm/SCS	-87	-87	-Infinity	-87
Io Note3	Config 1,2	dBm/ 9.36MHz	-61.41	-61.41	-70.05	-61.41
	Config 3	dBm/ 38.16MHz	-55.31	-55.31	-63.94	-55.31
Propagation condition			AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.3.1.9.3 Test Requirements

The UE shall start to transmit the PRACH to cell 2 less than 72 ms from the beginning of time period T3.

During T3 UE is allowed to cause $T_{interrupt1}$ interruption to cell 1. $T_{interrupt1}$ is defined in clause 6.1.3.2.2 Table 6.1.3.2.2-2. When UE is transmitting PRACH preamble to cell 2, interruption to cell 1 is allowed.

During T4 UE is allowed to cause $T_{interrupt2}$ interruption to cell 1. $T_{interrupt2}$ is defined in clause 6.1.3.2.2 Table 6.1.3.2.2-5.

UE shall finish cell 1 release in T4 and shall not send any CSI reports to cell 1 during T5.

The rate of correct handovers observed during repeated tests shall be at least 90%.

A.6.3.1.10 Intra-band inter-frequency asynchronous DAPS handover test in SA for FR1

A.6.3.1.10.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR1-NR FR1 intra-band inter-frequency asynchronous DAPS handover requirements specified in clause 6.1.3.2.

A.6.3.1.10.2 Test Parameters

Supported test configurations are shown in table A.6.3.1.10.2-1. Both handover delay and interruption length are tested by using the parameters in table A.6.3.1.10.2-2, and A.6.3.1.10.2-3.

The test consists of five successive time periods, with time durations of T1, T2, T3, T4 and T5 respectively. At the start of time duration T1, the UE may not have any timing information of cell 2. The UE shall be configured with periodic CSI reporting for cell1. The test scenario comprises of two carriers and one cell on each carrier. Gap pattern ID gp0 as specified in Table 9.1.2-1 is configured before T2 in the test case.

Starting T2, Cell 2 becomes known to the UE. During T2, the UE shall report Event A3. After receiving the Event A3, the test system shall send a RRC message implying DAPS handover to the UE.

T3 is defined as the end of the last TTI containing the RRC message implying DAPS handover.During T3 UE shall be able to perform random access to cell 2. Cell 1 is continuously scheduled in DL during T3. DL schedule and UL feedback to cell 1 shall be avoided when UE is required to perfrom DL reception or UL transmission in PRACH procedure in cell 2, except preamble transmission. At the end of T3 cell 2 shall send an RRC message implying cell 1 release command.

T4 is defined as the end of the last TTI containing the RRC message implying DAPS handover. Cell 2 is continuously scheduled in DL during T4. During T4, the UE shall perform source cell release.

Starting T5, the UE shall stop sending CSI report to the source cell. And the test system shall observe the periodic reporting of CSI for cell 1 during T5.

Table A.6.3.1.10.2-1: Intra-band inter-frequency asynchronous DAPS handover in SA for FR1 test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.3.1.10.2-2: General test parameters for intra-band inter-frequency asynchronous DAPS handover test in SA for FR1

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
A3-Offset		dB	0	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			10 μs	Asynchronous cells
T1		s	5	
T2		s	≤5	

T3	s	1	
T4	ms	10 + $T_{interrupt2}$	$T_{interrupt2}$ is defined in clause 6.1.3.2.2 Table 6.1.3.2.2-5
T5	ms	100	

Table A.6.3.1.10.2-3: Cell specific test parameters for intra-band inter-frequency asynchronous DAPS handover test in SA for FR1

Parameter		Unit	Cell 1		Cell 2	
			T1	T2 - T5	T1	T2 - T5
NR RF Channel Number			1		2	
Duplex mode	Config 1		FDD			
TDD configuration	Config 1		Not Applicable			
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52			
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52			
DRX Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD			
CORESET Reference Channel	Config 1		CR.1.1 FDD			
TRS configuration	Config 1		TRS.1.1 FDD			
OCNG Patterns			OP.1			
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD			
reportConfigType			periodic		N/A	
reportQuantity			cri-RI-PMI-CQI		N/A	
CSI reporting periodicity	Config 1	slot	5		N/A	
CSI reporting offset	Config 1	slot	3		N/A	
SMTC Configuration			SMTC.1			
SSB Configuration	Config 1		SSB.1 FR1			
PDSCH/PDCCH subcarrier spacing	Config 1	kHz	15 kHz			
PUCCH/PUSCH subcarrier spacing	Config 1	kHz	15 kHz			
PRACH configuration			FR1 PRACH configuration 1			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-98			
N_{oc} Note2	Config 1	dBm/SCS	-98			
$\hat{E}_s / I_{ot}$		dB	8	8	-Infinity	8
$\hat{E}_s / N_{oc}$		dB	8	8	-Infinity	8
SSB_RP	Config 1	dBm/SCS	-90	-90	-Infinity	-90
Io Note3	Config 1	dBm/ 9.36MHz	-61.41	-61.41	-70.05	-61.41
Propagation condition			AWGN			

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.3.1.10.3 Test Requirements

The UE shall start to transmit the PRACH to cell 2 less than 72 ms from the beginning of time period T3.

During T3 UE is allowed to cause $T_{interrupt1}$ interruption to cell 1. $T_{interrupt1}$ is defined in clause 6.1.3.2.2 Table 6.1.3.2.2-2. When UE is transmitting PRACH preamble to cell 2, interruption to cell 1 is allowed.

During T4 UE is allowed to cause $T_{interrupt2}$ interruption to cell 1. $T_{interrupt2}$ is defined in clause 6.1.3.2.2 Table 6.1.3.2.2-5.

UE shall finish cell 1 release in T4 and shall not send any CSI reports to cell 1 during T5.

The rate of correct handovers observed during repeated tests shall be at least 90%.

A.6.3.1.11 Inter-band inter-frequency synchronous DAPS handover from FR1 to FR1

A.6.3.1.11.1 Test Purpose and Environment

This test is to verify the requirement for the FR1-to-FR1 inter-band inter-frequency synchronous DAPS handover requirements specified in clause 6.1.3.2.

A.6.3.1.11.2 Test Parameters

Supported test configurations are shown in table A.6.3.1.11.2-1. Both handover delay and interruption length are tested by using the parameters in table A.6.3.1.11.2-2, A.6.3.1.11.2-3 and A.6.3.1.11.2-4.

The test scenario comprises of two bands each with one cell. The test consists of five successive time periods, with time durations of T1, T2, T3, T4 and T5 respectively.

Before the start of T1, the UE is connected to Cell 1 (source PCell) on radio channel 1 but is not aware of Cell 2 (neighbour cell) on radio channel 2. The UE shall be configured with periodic CSI reporting for cell1. During T1, the UE shall not have any timing information of Cell 2.

Before the start of T2, the UE in the measurement control information that event-triggered reporting with Event A3 is configured for neighbour cell (Cell 2), and the UE is configured with the measurement gaps (gap pattern ID # 0). Starting T2, Cell 2 becomes known to the UE. During T2, the UE shall report Event A3. After receiving the Event A3, the test system shall send a RRC m`essage implying DAPS handover to the UE.

The start of T3 is the instant when the last TTI containing the RRC message implying DAPS handover to Cell 2 (target PCell) is sent to the UE. During T3, the UE shall be able to perform random access to Cell 2. DL schedule and UL feedback to cell 1 shall be avoided when UE is required to perform DL reception or UL transmission in PRACH procedure in cell 2, except preamble transmission. After the RACH procedure is completed, the test system shall send a RRC message to the UE to release Cell 1 (source cell) on radio channel 1.

The start of T4 is the instant when the last TTI containing the RRC message implying source cell release is sent to the UE. During T4, the UE shall perform source cell release.

Starting T5, the UE shall stop sending CSI report to the source cell.

Table A.6.3.1.11.2-1: Inter-band inter-frequency synchronous DAPS handover from FR1 to FR1 test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
4	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
5	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
7	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
8	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
9	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.3.1.11.2-2: General test parameters for inter-band inter-frequency synchronous DAPS handover from FR1 to FR1

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	PCell on RF channel number 1
	Neighbouring cell		Cell 2	Neighbour cell on RF channel number 2
Final condition	Active cell		Cell 2	PCell on RF channel number 2
	Neighbouring cell		Cell 1	Neighbour cell on RF channel number 1
A3-Offset		dB	-6	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells		µs	33	Synchronous cells
DRX			OFF	
Measurement gap pattern Id			#0	Gaps are configured before T2.
T1		s	5	
T2		s	<5	
T3		s	<0.5	
T4		ms	$10+T_{interrupt2}$	$T_{interrupt2}$ as defined in Table 6.1.3.2.2-6 for synchronous DAPS HO
T5		ms	100	

Table A.6.3.1.11.2-3: Cell specific test parameters for inter-band inter-frequency synchronous DAPS handover from FR1 to FR1 (Cell 1)

Parameter		Unit	Cell 1	
			T1	T2 – T5
NR RF Channel Number			1	
Duplex mode	Config 1,4,7		FDD	

	Config 2,3,5,6,8,9		TDD	
TDD configuration	Config 1,4,7		Not Applicable	
	Config 2,5,8		TDDConf.1.1	
	Config 3,6,9		TDDConf.2.1	
$BW_{channel}$	Config 1,4,7	MHz	10: $N_{RB,c}$ = 52	
	Config 2,5,8		10: $N_{RB,c}$ = 52	
	Config 3,6,9		40: $N_{RB,c}$ = 106	
BWP BW	Config 1,4,7	MHz	10: $N_{RB,c}$ = 52	
	Config 2,5,8		10: $N_{RB,c}$ = 52	
	Config 3,6,9		40: $N_{RB,c}$ = 106	
TRS configuration	Config 1,4,7		TRS.1.1 FDD	
	Config 2,5,8		TRS.1.1 TDD	
	Config 3,6,9		TRS.1.2 TDD	
DRX Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1,4,7		SR.1.1 FDD	
	Config 2,5,8		SR.1.1 TDD	
	Config 3,6,9		SR.2.1 TDD	
CORESET Reference Channel	Config 1,4,7		CR.1.1 FDD	
	Config 2,5,8		CR.1.1 TDD	
	Config 3,6,9		CR.2.1 TDD	
OCNG Patterns			OP.1	
CSI-RS configuration for CSI reporting	Config 1,4,7		CSI-RS.1.1 FDD	
	Config 2,5,8		CSI-RS.1.1 TDD	
	Config 3,6,9		CSI-RS.2.1 TDD	
reportConfigType			periodic	
reportQuantity			cri-RI-PMI-CQI	
CSI reporting periodicity	Config 1,2,4,5,7,8	slot	5	
	Config 3,6,9		10	
CSI reporting offset	Config 1,2,4,5,7,8	slot	3	
	Config 3,6,9		5	
SMTC Configuration			SMTC.1	
SSB Configuration	Config 1,2,4,5,7,8		SSB.1 FR1	
	Config 3,6,9		SSB.2 FR1	
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5,7,8	kHz	15 kHz	
	Config 3,6,9		30 kHz	
PUCCH/PUSCH subcarrier spacing	Config 1,2,4,5,7,8	kHz	15 kHz	
	Config 3,6,9		30 kHz	
PRACH configuration			FR1 PRACH configuration 2	
BWP	Initial DL BWP		DLBWP.0.1	
	Dedicated DL BWP		DLBWP.1.3	
	Initial UL BWP		ULBWP.0.1	
	Dedicated UL BWP		ULBWP.1.3	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2		dBm/15kHz	-98	-98
N_{oc} Note2	Config 1,2,4,5,7,8	dBm/SCS	-98	-98
	Config 3,6,9		-95	-95
$\hat{E}_s / I_{ot}$		dB	4	4
$\hat{E}_s / N_{oc}$		dB	4	4

SSB_RP	Config 1,2,4,5,7,8	dBm/SCS	-94	-94
	Config 3,6,9	dBm/SCS	-91	-91
Io[Note3]	Config 1,2,4,5,7,8	dBm/ 9.36MHz	-64.59	-64.59
	Config 3,6,9	dBm/ 38.16MHz	-58.49	-58.49
Propagation condition		-	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.6.3.1.11.2-4: Cell specific test parameters for inter-band inter-frequency synchronous DAPS handover from FR1 to FR1 (Cell 2)

Parameter		Unit	Cell 2	
			T1	T2-T5
NR RF Channel Number			2	
Duplex mode	Config 1,2,3		FDD	
	Config 4,5,6,7,8,9		TDD	
TDD configuration	Config 1,2,3		Not Applicable	
	Config 4,5,6		TDDConf.1.1	
	Config 7,8,9		TDDConf.2.1	
$BW_{channel}$	Config 1,2,3	MHz	10: $N_{RB,c}$ = 52	
	Config 4,5,6		10: $N_{RB,c}$ = 52	
	Config 7,8,9		40: $N_{RB,c}$ = 106	
BWP BW	Config 1,2,3	MHz	10: $N_{RB,c}$ = 52	
	Config 4,5,6		10: $N_{RB,c}$ = 52	
	Config 7,8,9		40: $N_{RB,c}$ = 106	
TRS configuration	Config 1,2,3		TRS.1.1 FDD	
	Config 4,5,6		TRS.1.1 TDD	
	Config 7,8,9		TRS.1.2 TDD	
DRx Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1,2,3		SR.1.1 FDD	
	Config 4,5,6		SR.1.1 TDD	
	Config 7,8,9		SR2.1 TDD	
CORESET Reference Channel	Config 1,2,3		CR.1.1 FDD	
	Config 4,5,6		CR.1.1 TDD	
	Config 7,8,9		CR2.1 TDD	
OCNG Patterns			OCNG pattern 1	
CSI-RS configuration for CSI reporting	Config 1,2,3		CSI-RS.1.1 FDD	
	Config 4,5,6		CSI-RS.1.1 TDD	
	Config 7,8,9		CSI-RS.2.1 TDD	
SMTC Configuration			SMTC pattern 1	
SSB Configuration	Config 1,2,3,4,5,6		SSB.1 FR1	
	Config 7,8,9		SSB.2 FR1	
PDSCH/PDCCH subcarrier spacing	Config 1,2,3,4,5,6	kHz	15 kHz	
	Config 7,8,9		30 kHz	
PUCCH/PUSCH subcarrier spacing	Config 1,2,3,4,5,6	kHz	15 kHz	
	Config 7,8,9		30 kHz	
PRACH configuration			FR1 PRACH configuration 2	
BWP	Initial DL BWP		DLBWP.0.1	
	Dedicated DL BWP		DLBWP.1.3	

	Initial UL BWP		ULBWP.0.1	
	Dedicated UL BWP		ULBWP.1.3	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2		dBm/15kHz	-98	-98
N_{oc} Note2	Config 1,2,3,4,5,6	dBm/SCS	-98	-98
	Config 7,8,9		-95	-95
$\hat{E}_s / I_{ot}$		dB	-Infinity	4
$\hat{E}_s / N_{oc}$		dB	-Infinity	4
SSB_RP	Config 1,2,3,4,5,6	dBm/SCS	-Infinity	-94
	Config 7,8,9	dBm/SCS	-Infinity	-91
Io Note3	Config 1,2,3,4,5,6	dBm/ 9.36MHz	-70.05	-64.59
	Config 7,8,9	dBm/ 38.16MHz	-63.94	-58.49
Propagation condition		-	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.3.1.11.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 72 ms from the beginning of time period T3. During $D_{handover1}$, the interruption on Cell 1 shall not exceed $T_{interrupt1}$ as defined in Table 6.1.3.2.2-3 for synchronous DAPS HO.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay $D_{handover1}$ can be expressed as: $T_{RRC_procedure} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin}$, where:

$T_{RRC_procedure}$ = 10 ms and is specified in clause 12 in TS 38.331 [2].

T_{IU} = 20 ms in the test. T_{IU} is defined in clause 6.1.1.2.2.

T_{Δ} = 20 ms in the test. T_{Δ} is defined in clause 6.1.1.2.2.

$T_{processing}$ = 20 ms in the test. $T_{processing}$ is defined in clause 6.1.1.2.2.

T_{margin} = 2 ms in the test. T_{margin} is defined in clause 6.1.1.2.2.

This gives a total of 72 ms.

The UE shall complete to release Cell 1 less than (10 ms + $T_{interrupt2}$) from the beginning of time period T4. During $D_{handover2}$, the interruption on Cell 2 shall not exceed $T_{interrupt2}$ as defined in Table 6.1.3.2.2-6 for synchronous DAPS HO.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay $D_{handover2}$ can be expressed as: $T_{RRC_procedure} + T_{interrupt2}$, where:

$T_{RRC_procedure}$ = 10 ms and is specified in clause 12 in TS 38.331 [2].

A.6.3.1.12 Inter-band inter-frequency asynchronous DAPS handover from FR1 to FR1

A.6.3.1.12.1 Test Purpose and Environment

This test is to verify the requirement for the FR1-to-FR1 inter-band inter-frequency asynchronous DAPS handover requirements specified in clause 6.1.3.2.

A.6.3.1.12.2 Test Parameters

Supported test configurations are shown in table A.6.3.1.12.2-1. Both handover delay and interruption length are tested by using the parameters in table A.6.3.1.12.2-2, A.6.3.1.12.2-3 and A.6.3.1.12.2-4.

The test scenario comprises of two bands each with one cell. The test consists of five successive time periods, with time durations of T1, T2, T3, T4 and T5 respectively.

Before the start of T1, the UE is connected to Cell 1 (source PCell) on radio channel 1 but is not aware of Cell 2 (neighbour cell) on radio channel 2. The UE shall be configured with periodic CSI reporting for cell1. During T1, the UE shall not have any timing information of Cell 2.

Before the start of T2, the UE in the measurement control information that event-triggered reporting with Event A3 is configured for neighbour cell (Cell 2), and the UE is configured with the measurement gaps (gap pattern ID # 0). Starting T2, Cell 2 becomes known to the UE. During T2, the UE shall report Event A3. After receiving the Event A3, the test system shall send a RRC message implying DAPS handover to the UE.

The start of T3 is the instant when the last TTI containing the RRC message implying DAPS handover to Cell 2 (target PCell) is sent to the UE. During T3, the UE shall be able to perform random access to Cell 2. DL schedule and UL feedback to cell 1 shall be avoided when UE is required to perform DL reception or UL transmission in PRACH procedure in cell 2, except preamble transmission. After the RACH procedure is completed, the test system shall send a RRC message to the UE to release Cell 1 (source cell) on radio channel 1.

The start of T4 is the instant when the last TTI containing the RRC message implying source cell release is sent to the UE. During T4, the UE shall perform source cell release.

Starting T5, the UE shall stop sending CSI report to the source cell.

Table A.6.3.1.12.2-1: Inter-band inter-frequency asynchronous DAPS handover from FR1 to FR1 test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
4	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
5	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode

7	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
8	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
9	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.3.1.12.2-2: General test parameters for inter-band inter-frequency asynchronous DAPS handover from FR1 to FR1

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
A3-Offset		dB	-4	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells	Config 1,2,4,5	ms	0.5	Asynchronous cells
	Config3,6,7,8,9	ms	0.25	
DRX			OFF	
Measurement gap pattern Id			#0	Gaps are configured before T2.
T1		s	5	
T2		s	<5	
T3		s	<0.5	
T4		ms	$10+T_{interrupt2}$	$T_{interrupt2}$ as defined in Table 6.1.3.2.2-6 for asynchronous DAPS HO.
T5		ms	100	

Table A.6.3.1.12.2-3: Cell specific test parameters for inter-band inter-frequency asynchronous DAPS handover from FR1 to FR1 (Cell 1)

Parameter		Unit	Cell 1	
			T1	T2 – T5
NR RF Channel Number			1	
Duplex mode	Config 1,4,7		FDD	
	Config 2,3,5,6,8,9		TDD	
TDD configuration	Config 1,4,7		Not Applicable	
	Config 2,5,8		TDDConf.1.1	
	Config 3,6,9		TDDConf.2.1	
$BW_{channel}$	Config 1,4,7	MHz	10: $N_{RB,c}$ = 52	
	Config 2,5,8		10: $N_{RB,c}$ = 52	
	Config 3,6,9		40: $N_{RB,c}$ = 106	
BWP BW	Config 1,4,7	MHz	10: $N_{RB,c}$ = 52	
	Config 2,5,8		10: $N_{RB,c}$ = 52	
	Config 3,6,9		40: $N_{RB,c}$ = 106	
TRS configuration	Config 1,4,7		TRS.1.1 FDD	
	Config 2,5,8		TRS.1.1 TDD	
	Config 3,6,9		TRS.1.2 TDD	
DRX Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1,4,7		SR.1.1 FDD	
	Config 2,5,8		SR.1.1 TDD	
	Config 3,6,9		SR.2.1 TDD	

CORESET Reference Channel	Config 1,4,7		CR.1.1 FDD	
	Config 2,5,8		CR.1.1 TDD	
	Config 3,6,9		CR.2.1 TDD	
OCNG Patterns			OP.1	
CSI-RS configuration for CSI reporting	Config 1,4,7		CSI-RS.1.1 FDD	
	Config 2,5,8		CSI-RS.1.1 TDD	
	Config 3,6,9		CSI-RS.2.1 TDD	
reportConfigType			periodic	
reportQuantity			cri-RI-PMI-CQI	
CSI reporting periodicity	Config 1,2,4,5,7,8	slot	5	
	Config 3,6,9		10	
CSI reporting offset	Config 1,2,4,5,7,8	slot	3	
	Config 3,6,9		5	
SMTC Configuration			SMTC.1	
SSB Configuration	Config 1,2,4,5,7,8		SSB.1 FR1	
	Config 3,6,9		SSB.2 FR1	
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5,7,8	kHz	15 kHz	
	Config 3,6,9		30 kHz	
PUCCH/PUSCH subcarrier spacing	Config 1,2,4,5,7,8	kHz	15 kHz	
	Config 3,6,9		30 kHz	
PRACH configuration			FR1 PRACH configuration 2	
BWP	Initial DL BWP		DLBWP.0.1	
	Dedicated DL BWP		DLBWP.1.3	
	Initial UL BWP		ULBWP.0.1	
	Dedicated UL BWP		ULBWP.1.3	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2		dBm/15kHz	-98	-98
N_{oc} Note2	Config 1,2,4,5,7,8	dBm/SCS	-98	-98
	Config 3,6,9		-95	-95
$\hat{E}_s / I_{ot}$		dB	4	4
$\hat{E}_s / N_{oc}$		dB	4	4
SSB_RP	Config 1,2,4,5,7,8	dBm/SCS	-94	-94
	Config 3,6,9	dBm/SCS	-91	-91
Io Note3	Config 1,2,4,5,7,8	dBm/ 9.36MHz	-64.59	-64.59
	Config 3,6,9	dBm/ 38.16MHz	-58.49	-58.49
Propagation condition		-	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.6.3.1.12.2-4: Cell specific test parameters for inter-band inter-frequency asynchronous DAPS handover from FR1 to FR1 (Cell 2)

Parameter		Unit	Cell 2	
			T1	T2-T5
NR RF Channel Number			2	
Duplex mode	Config 1,2,3		FDD	
	Config 4,5,6,7,8,9		TDD	
TDD configuration	Config 1,2,3		Not Applicable	
	Config 4,5,6		TDDConf.1.1	
	Config 7,8,9		TDDConf.2.1	
$BW_{channel}$	Config 1,2,3	MHz	10: $N_{RB,c}$ = 52	
	Config 4,5,6		10: $N_{RB,c}$ = 52	
	Config 7,8,9		40: $N_{RB,c}$ = 106	
BWP BW	Config 1,2,3	MHz	10: $N_{RB,c}$ = 52	
	Config 4,5,6		10: $N_{RB,c}$ = 52	
	Config 7,8,9		40: $N_{RB,c}$ = 106	
TRS configuration	Config 1,2,3		TRS.1.1 FDD	
	Config 4,5,6		TRS.1.1 TDD	
	Config 7,8,9		TRS.1.2 TDD	
DRx Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1,2,3		SR.1.1 FDD	
	Config 4,5,6		SR.1.1 TDD	
	Config 7,8,9		SR2.1 TDD	
CORESET Reference Channel	Config 1,2,3		CR.1.1 FDD	
	Config 4,5,6		CR.1.1 TDD	
	Config 7,8,9		CR2.1 TDD	
OCNG Patterns			OCNG pattern 1	
CSI-RS configuration for CSI reporting	Config 1,2,3		CSI-RS.1.1 FDD	
	Config 4,5,6		CSI-RS.1.1 TDD	
	Config 7,8,9		CSI-RS.2.1 TDD	
SMTC Configuration			SMTC pattern 1	
SSB Configuration	Config 1,2,3,4,5,6		SSB.1 FR1	
	Config 7,8,9		SSB.2 FR1	
PDSCH/PDCCH subcarrier spacing	Config 1,2,3,4,5,6	kHz	15 kHz	
	Config 7,8,9		30 kHz	
PUCCH/PUSCH subcarrier spacing	Config 1,2,3,4,5,6	kHz	15 kHz	
	Config 7,8,9		30 kHz	
PRACH configuration			FR1 PRACH configuration 2	
BWP	Initial DL BWP		DLBWP.0.1	
	Dedicated DL BWP		DLBWP.1.3	
	Initial UL BWP		ULBWP.0.1	
	Dedicated UL BWP		ULBWP.1.3	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2		dBm/15kHz	-98	-98
N_{oc} Note2	Config 1,2,3,4,5,6	dBm/SCS	-98	-98
	Config 7,8,9		-95	-95

$\hat{E}_s/I_{ot}$		dB	-Infinity	4
$\hat{E}_s/N_{oc}$		dB	-Infinity	4
SSB_RP	Config 1,2,3,4,5,6	dBm/SCS	-Infinity	-94
	Config 7,8,9	dBm/SCS	-Infinity	-91
Io[Note3]	Config 1,2,3,4,5,6	dBm/ 9.36MHz	-70.05	-64.59
	Config 7,8,9	dBm/ 38.16MHz	-63.94	-58.49
Propagation condition		-	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.3.1.12.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 72 ms from the beginning of time period T3. During $D_{handover1}$, the interruption on Cell 1 shall not exceed $T_{interrupt1}$ as defined in Table 6.1.3.2.2-3 for asynchronous DAPS HO.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay $D_{handover1}$ can be expressed as: $T_{RRC_procedure} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin}$, where:

$T_{RRC_procedure}$ = 10 ms and is specified in clause 12 in TS 38.331 [2].

T_{IU} = 20 ms in the test. T_{IU} is defined in clause 6.1.1.2.2.

T_{Δ} = 20 ms in the test. T_{Δ} is defined in clause 6.1.1.2.2.

$T_{processing}$ = 20 ms in the test. $T_{processing}$ is defined in clause 6.1.1.2.2.

T_{margin} = 2 ms in the test. T_{margin} is defined in clause 6.1.1.2.2.

This gives a total of 72 ms.

The UE shall complete to release Cell 1 less than (10 ms + $T_{interrupt2}$) from the beginning of time period T4. During $D_{handover2}$, the interruption on Cell 2 shall not exceed $T_{interrupt2}$ as defined in Table 6.1.3.2.2-6 for asynchronous DAPS HO.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay $D_{handover2}$ can be expressed as: $T_{RRC_procedure} + T_{interrupt2}$, where:

$T_{RRC_procedure}$ = 10 ms and is specified in clause 12 in TS 38.331 [2].

A.6.3.1.13 SA NR - E-UTRAN with NR PSCell addition in FR1

A.6.3.1.13.1 Test Purpose and Environment

The purpose of this set of tests is to verify that the UE can make correct inter-RAT E-UTRAN handover with PSCell addition when operating in standalone (SA) operation with PCell in FR1 where target PCell and target PSCell are unknown. This test shall verify the Handover with PSCell from NR SA to EN-DC requirements as specified in clause 6.1.5.1.

The test comprises of two NR carrier and one E-UTRA carrier. There are three cells and one cell on each carrier. Cell 1 is the NR PCell, Cell 2 is an inter-RAT E-UTRAN neighbour cell and Cell 3 is an NR neighbour cell. The test consists of two successive time periods, with time durations of T1 and T2 respectively. At the start of time duration T1, the UE does not have any timing information of Cell 2 and Cell 3. Starting T2, Cell 2 and Cell 3 becomes detectable

A RRC message implying handover with PSCell shall be sent to the UE during period T1. The start of T2 is the instant when the last TTI containing the RRC message implying handover with PSCell is sent to the UE.Before T2, the UE does not have any information of Cell 3. The handover with PSCell message shall contain Cell 2 and Cell 3 as the target cells and the SMTC for Cell 3 is configured in *RRCConnectionReconfiguration.*

Supported test configurations are shown in table A.6.3.1.13.1-1. General test parameters are provided in Table A.6.3.1.13.1-2. Cell specific test parameters for Cell 1, Cell 2 and Cell 3 are provided in Tables A.6.3.1.13.1-3, A.6.3.1.13.1-4 and A.6.3.1.13.1-5 respectively.

Table A.6.3.1.13.1-1: Supported test configurations for SA inter-RAT E-UTRAN handover tests

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.3.1.13.1-2: General test parameters for Handover with PSCell from NR SA to EN-DC

Parameter		Unit	Value	Comment
NR RF Channel Number			1, 2	2 NR carrier frequency is used in the test
LTE RF Channel Number			3	1 E-UTRAN carrier frequency is used in the test
Initial conditions	Active cell		Cell 1	NR cell
	Neighbouring cell		Cell 2, Cell3	E-UTRAN cell and NR Cell
Final condition	Active cell		Cell 2 and Cell 3	
DRX			OFF	Non-DRX test
Access Barring Information		-	Not sent	No additional delays in random access procedure
Time offset between Cell 1 and Cell 2			3 ms	Asynchronous cells
T1		s	5	
T2		s	≤5	

Table A.6.3.1.13.1-3: Cell specific test parameters for Handover with PSCell from NR SA to EN-DC (Cell1)

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6	1	
Duplex mode		1, 4	FDD	
		2, 3, 5, 6	TDD	
TDD Configuration		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	
$BW_{channel}$	MHz	1, 4	10: $N_{RB,c}$ = 52 (FDD)	
		2, 5	10: $N_{RB,c}$ = 52 (TDD)	
		3, 6	40: $N_{RB,c}$ = 106 (TDD)	

PDSCH reference measurement channel			1, 4	SR.1.1 FDD	
			2, 5	SR.1.1 TDD	
			3, 6	SR.2.1 TDD	
CORSET reference channel			1, 4	CR.1.1 FDD	
			2, 5	CR.1.1 TDD	
			3, 6	CR.2.1 TDD	
TRS configuration			1, 4	TRS.1.1 FDD	
			2, 5	TRS.1.1 TDD	
			3, 6	TRS.1.2 TDD	
OCNG pattern[Note1]			1, 2, 3, 4, 5, 6	OP.1	
BWP	Initial DL BWP		1, 2, 3, 4, 5, 6	DLBWP.0.1	
	Dedicated DL BWP			DLBWP.1.1	
	Initial UL BWP			ULBWP.0.1	
	Dedicated UL BWP			ULBWP.1.1	
SMTC configuration			1, 2, 3, 4, 5, 6	SMTC.1	
SSB configuration			1, 2, 4, 5	SSB.1 FR1	
			3, 6	SSB.2 FR1	
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4, 5, 6	0	
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS					
EPRE ratio of OCNG to OCNG DMRS					
N_{oc}[Note2]		dBm/15 KHz	1, 2, 3, 4, 5, 6	-100	-100
N_{oc}[Note2]		dBm/SCS	1, 2, 4, 5	-100	-100
			3, 6	-97	-97
$\hat{E}_s/N_{oc}$		dB	1, 2, 3, 4, 5, 6	12	-4
$\hat{E}_s/I_{ot}$[Note3]		dB	1, 2, 3, 4, 5, 6	12	-4
SS-RSRP[Note3]		dBm/SCS	1, 2, 4, 5	-88	-104
			3, 6	-85	-101
Io[Note3]		dBm/9.36 MHz	1, 2, 4, 5	-59.78	-70.59
		dBm/38.16 MHz	3, 6	-53.68	-64.49
Propagation condition			1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix			1, 2, 3, 4, 5, 6	1x2 Low	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.6.3.1.13.1-4: Cell specific test parameters for Handover with PSCell from NR SA to EN-DC (Cell 2)

Parameter	Unit	Configuration	Cell 2	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6	3	
Duplex mode		1, 2, 3	FDD	
		4, 5, 6	TDD	
TDD special subframe configuration[Note1]		4, 5, 6	6	
TDD uplink-downlink configuration[Note1]		4, 5, 6	1	
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PRACH Configuration[Note2]		1, 2, 3	4	
		4, 5, 6	53	
PDSCH parameters: DL Reference Measurement Channel[Note3]		1, 2, 3	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note3]		1, 2, 3	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note3]		1, 2, 3	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note4]				
OCNG_RB[Note4]				
N_{oc}[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6	-98	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	-Infinity	78
$\hat{E}_s/I_{ot}$[Note6]	dB	1, 2, 3, 4, 5, 6	-Infinity	78
RSRP[Note6]	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-90

SCH_RP Note6	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-90
Io Note6	dBm/9MHz	1, 2, 3, 4, 5, 6	-67.21 +10log($N_{RB,c}$/100)	-58.57 +10log($N_{RB,c}$/100)
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix Note7		1, 2, 3, 4, 5, 6	1x2 Low	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [23].
Note 3: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 4: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 6: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 7: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].

Table A.6.3.1.13.1-5: Cell specific test parameters for Handover with PSCell from NR SA to EN-DC (Cell 3)

Parameter		Unit	Configuration	Cell 3	
				T1	T2
RF channel number			1, 2, 3, 4, 5, 6	2	
Duplex mode			1, 4	FDD	
			2, 3, 5, 6	TDD	
TDD Configuration			2, 5	TDDConf.1.1	
			3, 6	TDDConf.2.1	
$BW_{channel}$		MHz	1, 4	10: $N_{RB,c}$ = 52 (FDD)	
			2, 5	10: $N_{RB,c}$ = 52 (TDD)	
			3, 6	40: $N_{RB,c}$ = 106 (TDD)	
PDSCH reference measurement channel			1, 4	SR.1.1 FDD	
			2, 5	SR.1.1 TDD	
			3, 6	SR.2.1 TDD	
CORSET reference channel			1, 4	CR.1.1 FDD	
			2, 5	CR.1.1 TDD	
			3, 6	CR.2.1 TDD	
TRS configuration			1, 4	TRS.1.1 FDD	
			2, 5	TRS.1.1 TDD	
			3, 6	TRS.1.2 TDD	
PRACH configuration			1, 2, 3, 4, 5, 6	FR1 PRACH configuration 1	
OCNG pattern Note1			1, 2, 3, 4, 5, 6	OP.1	
BWP	Initial DL BWP		1, 2, 3, 4, 5, 6	DLBWP.0.1	
	Dedicated DL BWP			DLBWP.1.1	
	Initial UL BWP			ULBWP.0.1	
	Dedicated UL BWP			ULBWP.1.1	
SMTC configuration			1, 2, 3, 4, 5, 6	SMTC.1	
SSB configuration			1, 2, 4, 5	SSB.1 FR1	
			3, 6	SSB.2 FR1	
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4, 5, 6	0	
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					

EPRE ratio of PDCCH_DMRS to SSS				
EPRE ratio of PDCCH to PDCCH_DMRS				
EPRE ratio of PDSCH_DMRS to SSS				
EPRE ratio of PDSCH to PDSCH_DMRS				
EPRE ratio of OCNG DMRS to SSS				
EPRE ratio of OCNG to OCNG DMRS				
N_{oc}[Note2]	dBm/15 KHz	1, 2, 3, 4, 5, 6	-100	-85
N_{oc}[Note2]	dBm/SCS	1, 2, 4, 5	-100	-85
		3, 6	-100	-82
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	-Infinity	0
$\hat{E}_s/I_{ot}$[Note3]	dB	1, 2, 3, 4, 5, 6	-Infinity	0
SS-RSRP[Note3]	dBm/SCS	1, 2, 4, 5	-Infinity	-85
		3, 6	-Infinity	-82
Io[Note3]	dBm/9.36 MHz	1, 2, 4, 5	-72.05	-57
	dBm/38.16 MHz	3, 6	-68.96	-51
Propagation condition		1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x2 Low	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

A.6.3.1.13.2 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 175 ms from the beginning of time period T2.

The UE shall start to transmit the PRACH to Cell 3 less than 270 ms from the beginning of time period T2.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 50 ms and is specified in clause 6.1.5.1.

$T_{interrupt}$ = 125 ms in the test; $T_{interrupt}$ is defined in clause 6.1.5.1.

The PSCell addition time can be expressed as: $T_{RRC_delay} + T_{processing} + T_{search_HO} + T_{search_PSCell} + T_{\Delta} + T_{PSCell_DU}$ + 2 ms which is defined in clause 6.1.5.1

The rate of correct handovers observed during repeated tests shall be at least 90%.

A.6.3.1.14 SA NR - E-UTRAN handover with NR FR1 PScell addition

A.6.3.1.14.1 Test Purpose and Environment

The purpose of this set of tests is to verify that the UE can make correct SA inter-RAT handover from NR to E-UTRAN with FR1 PSCell addition when operating in standalone (SA) operation with PCell in FR1, for the case where the PSCell is known to the UE at the time of addition and SMTC of target known PSCell is not present in *RRCConnectionReconfiguration*. This test shall verify delay requirements of inter-RAT handover from NR to E-UTRAN and FR1 PSCell addition as specified in clause 6.1.5.

The test comprises of two NR cells and one E-UTRA cell. Cell 1 is the NR PCell, Cell 2 is an inter-RAT E-UTRAN neighbour cell and Cell 3 is the target NR PSCell, on radio channel 1 in FR1, radio channel 2 in E-UTRAN and radio channel 3 in FR1, respectively.

In this test, inter-RAT handover from NR to E-UTRAN and FR1 PSCell addition are performed in parallel processing. The test consists of successive time periods for inter-RAT handover and FR1 PSCell addition with time durations of T1, T2 and T3 respectively.

At the start of time duration T1, the UE does not have any timing information of Cell 2 and Cell 3, and the UE is only monitoring Cell 1. During T1, only Cell1 is known to the UE.

Before the start of T2, the test system shall send measurement control information including measurement gap configuration and event-triggered reporting configuration with event B2 for neighbour Cell 2 and event B1 for Cell 3. Gap pattern configuration with id #0 as specified in Table 9.1.2-1 is configured before T2 begins.

Starting T2, Cell 2 becomes detectable and the UE is expected to detect and send a measurement report, and the Cell 3 (PSCell-to-be) on radio channel 3 becomes known to the UE at the time of addition. The RRC message implying handover with PSCell shall be sent to the UE during period T2 after the UE has reported Event B2 and Event B1. After receiving both Event B2 and Event B1the test system shall send a RRC message to the UE to release the measurement gaps.

The point in time at which the RRC message implying handover with PSCell is received at the UE antenna connector defines the start of period T3 and T3'. The handover with PSCell message shall contain Cell 2 as the target cell and Cell 3 as PSCell-to-be added. The RRC message (to add PSCell) also includes a request for the UE to start periodic CSI reporting for the PSCell after the PSCell has been successfully added.

During T3, the UE shall carry out random access (i.e., transmit the PRACH) towards the Cell 2. Reception by the test system of the PRACH preamble defines the end of T3.

During T3', the UE shall carry out random access (i.e., transmit the PRACH) towards the Cell 3. Reception by the test system of the PRACH preamble defines the start of period T4'.

During T4', the UE shall send periodic CSI reports in PSCell and the test system shall observe the periodic reporting of CSI for PSCell.

Supported test configurations are shown in table A.6.3.1.14.1-1. General test parameters are provided in Table A.6.3.1.14.1-2. Cell specific test parameters for NR Cell 1, E-UTRAN PCell Cell 2 and NR PScell Cell 3 are provided in Tables A.6.3.1.14.1-3, A.6.3.1.14.1-4 and A.6.3.1.14.1-5 respectively.

Table A.6.3.1.14.1-1: Supported test configurations for SA inter-RAT E-UTRAN handover with FR1 PSCell addition tests

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD, LTE FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD, LTE FDD
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD, LTE TDD
6	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD, LTE TDD

Note: The UE is only required to be tested in one of the supported test configurations

Table A.6.3.1.14.1-2: General test parameters for SA inter-RAT E-UTRAN handover with FR1 PSCell addition

Parameter		Unit	Value	Comment
NR RF Channel Number			1, 3	2 NR carrier frequency is used in the test
LTE RF Channel Number			2	1 E-UTRAN carrier frequency is used in the test
Initial conditions	Active cell		Cell 1	NR cell
	Neighbouring cell		Cell 2, 3	E-UTRAN cell and NR cell in FR1
Final condition	Active Pcell		Cell 2	E-UTRAN cell
	Active PSCell		Cell 3	NR cell in FR1
NR measurement quantity			SS-RSRP	
E-UTRAN measurement quantity			RSRP	
Event B1	Hysteresis	dB	0	Hysteresis for evaluation of event B1.
	Threshold RSRP	dBm	-93	Actual RSRP threshold for event B1. Needs to take absolute accuracy tolerance in clause 9.1.11.1 into account plus margin.
	Time to Trigger	S	0	
Event B2	Threshold1	dBm	As specified in Table A.6.3.1.4-3	Absolute NR SS-RSRP threshold for event B2
	Threshold2EUTRAN	dBm	-98	Absolute E-UTRAN RSRP threshold for event B2
	Hysteresis	dB	0	
	TimeToTrigger	s	0	
Filter coefficient			0	L3 filtering is not used
DRX			OFF	Non-DRX test
Access Barring Information		-	Not sent	No additional delays in random access procedure
Time offset between cell 1 and cell 2			3 ms	Asynchronous cells
Measurement Gap pattern ID			0	As specified in Table 9.1.2-1
T1		s	1	During this time only Cell 1 is known to UE.
T2		s	≤5	During this time the UE shall identify Cell 2 and report event B2, and identify Cell 3 and report event B1.
T3		s	1	During this time the UE handovers to Cell 2.
T3'		s	0.5	During this time the UE adds the PSCell (Cell 3).
T4'		s	0.5	During this time the UE sends CSI reports for PSCell (Cell 3).

Table A.6.3.1.14.1-3: Cell specific test parameters for SA inter-RAT E-UTRA handover with FR1 PSCell addition (NR Cell 1)

Parameter	Unit	Configuration	Cell 1		
			T1	T2	T3
RF channel number		1, 2, 3, 4, 5, 6	1		
Duplex mode		1, 4	FDD		
		2, 3, 5, 6	TDD		
TDD Configuration		2, 5	TDDConf.1.1		
		3, 6	TDDConf.2.1		
$BW_{channel}$	MHz	1, 4	10: $N_{RB,c}$ = 52 (FDD)		

			2, 5	10: $N_{RB,c}$ = 52 (TDD)		
			3, 6	40: $N_{RB,c}$ = 106 (TDD)		
PDSCH reference measurement channel			1, 4	SR.1.1 FDD		
			2, 5	SR.1.1 TDD		
			3, 6	SR.2.1 TDD		
CORSET reference channel			1, 4	CR.1.1 FDD		
			2, 5	CR.1.1 TDD		
			3, 6	CR.2.1 TDD		
TRS configuration			1, 4	TRS.1.1 FDD		
			2, 5	TRS.1.1 TDD		
			3, 6	TRS.1.2 TDD		
OCNG pattern[Note1]			1, 2, 3, 4, 5, 6	OP.1		
BWP	Initial DL BWP		1, 2, 3, 4, 5, 6	DLBWP.0.1		
	Dedicated DL BWP			DLBWP.1.1		
	Initial UL BWP			ULBWP.0.1		
	Dedicated UL BWP			ULBWP.1.1		
SMTC configuration			1, 2, 3, 4, 5, 6	SMTC.1		
SSB configuration			1, 2, 4, 5	SSB.1 FR1		
			3, 6	SSB.2 FR1		
b2-Threshold1		dBm	1, 2, 4, 5	-96		
			3, 6	-93		
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4, 5, 6	0		
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						
EPRE ratio of PDCCH to PDCCH_DMRS						
EPRE ratio of PDSCH_DMRS to SSS						
EPRE ratio of PDSCH to PDSCH_DMRS						
EPRE ratio of OCNG DMRS to SSS						
EPRE ratio of OCNG to OCNG DMRS						
N_{oc}[Note2]		dBm/15 KHz	1, 2, 3, 4, 5, 6	-100	-104	-100
N_{oc}[Note2]		dBm/SCS	1, 2, 4, 5	-100	-104	-100
			3, 6	-97	-101	-97
$\hat{E}_s/N_{oc}$		dB	1, 2, 3, 4, 5, 6	12	0	-4
$\hat{E}_s/I_{ot}$[Note3]		dB	1, 2, 3, 4, 5, 6	12	0	-4
SS-RSRP[Note3]		dBm/SCS	1, 2, 4, 5	-88	-104	-104
			3, 6	-85	-101	-101
Io[Note3]		dBm/9.36 MHz	1, 2, 4, 5	-59.78	-73.04	-70.59
		dBm/38.16 MHz	3, 6	-53.68	-66.9448	-64.49
Propagation condition			1, 2, 3, 4, 5, 6	AWGN		
Antenna Configuration and Correlation Matrix			1, 2, 3, 4, 5, 6	1x2 Low		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.6.3.1.14.1-4: Cell specific test parameters for SA inter-RAT E-UTRA handover with FR1 PSCell addition (E-UTRA Cell 2)

Parameter	Unit	Configuration	Cell 2		
			T1	T2	T3
RF channel number		1, 2, 3, 4, 5, 6	2		
Duplex mode		1, 2, 3	FDD		
		4, 5, 6	TDD		
TDD special subframe configuration[Note1]		4, 5, 6	6		
TDD uplink-downlink configuration[Note1]		4, 5, 6	1		
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100		
PRACH Configuration[Note2]		1, 2, 3	4		
		4, 5, 6	53		
PDSCH parameters: DL Reference Measurement Channel[Note3]		1, 2, 3	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD		
		4, 5, 6	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD		
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note3]		1, 2, 3	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD		
		4, 5, 6	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD		
OCNG Patterns[Note3]		1, 2, 3	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD		
		4, 5, 6	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD		
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0		
PBCH_RB					
PSS_RA					
SSS_RA					
PCFICH_RB					
PHICH_RA					
PHICH_RB					
PDCCH_RA					
PDCCH_RB					
PDSCH_RA					
PDSCH_RB					
OCNG_RA[Note4]					
OCNG_RB[Note4]					
N_{oc}[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6	-98		
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	-Infinity	8	78
$\hat{E}_s/I_{ot}$[Note6]	dB	1, 2, 3, 4, 5, 6	-Infinity	78	78
RSRP[Note6]	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-90	-90
SCH_RP[Note6]	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-90	-90
Io[Note6]	dBm/9MHz	1, 2, 3, 4, 5, 6	-67.21 +10log($N_{RB,c}$/100)	-58.57 +10log($N_{RB,c}$/100)	-58.57 +10log($N_{RB,c}$/100)

Propagation Condition		1, 2, 3, 4, 5, 6	AWGN
Antenna Configuration and Correlation Matrix Note7		1, 2, 3, 4, 5, 6	1x2 Low

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [23].
Note 3: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 4: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 6: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 7: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].

Table A.6.3.1.14.1-5: Cell specific test parameters for SA inter-RAT E-UTRA handover with FR1 PSCell addition (NR Cell 3)

Parameter	Unit	Config	Test			
			T1	T2	T3'	T4'
E-UTRA RF Channel Number		1,2,3,4,5,6	1			
NR RF Channel Number		1,2,3,4,5,6	2			
TDD configuration		1,4	Not Applicable			
		2,5	TDDConf.1.1			
		3,6	TDDConf.2.1			
$BW_{channel}$	MHz	1,4	10: $N_{RB,c}$ = 52			
		2,5	10: $N_{RB,c}$ = 52			
		3,6	40: $N_{RB,c}$ = 106			
Initial BWP Configuration		1,2,3	DLBWP.0.1 ULBWP.0.1			
Dedicated BWP Configuration		1,2,3	DLBWP.1.1 ULBWP.1.1			
PDSCH Reference measurement channel		1,4	SR.1.1 FDD			
		2,5	SR.1.1 TDD			
		3,6	SR.2.1 TDD			
RMSI CORESET Reference Channel		1,4	CR.1.1 FDD			
		2,5	CR.1.1 TDD			
		3,6	CR.2.1 TDD			
Dedicated CORESET Reference Channel		1,4	CCR.1.1 FDD			
		2,5	CCR.1.1 TDD			
		3,6	CCR.2.1 TDD			
OCNG Patterns		1,2,3,4,5,6	OP.1			
SSB configuration		1,2,4,5	SSB.1 FR1			
		3,6	SSB.2 FR1			
SMTC configuration		1,2,4,5	SMTC.1			
		3,6	SMTC.1			
TRS Configuration		1,4	TRS.1.1 FDD			
		2,5	TRS.1.1 TDD			
		3,6	TRS.1.2 TDD			
PRACH configuration on cell2		FR1 PRACH configuration 1	Captured in A.3.8.2.1			
CSI-RS configuration for CSI reporting		1,4	CSI-RS.1.1 FDD			
		2,5	CSI-RS.1.1 TDD			
		3,6	CSI-RS.2.1 TDD			
reportConfigType		1,2,3,4,5,6	periodic			
reportQuantity		1,2,3,4,5,6	cri-RI-PMI-CQI			

CSI reporting periodicity	slot	1,2,4,5	5	
		3,6	10	
CSI reporting offset	slot	1,2,4,5	2	
		3,6	4	
EPRE ratio of PSS to SSS	dB	1,2,3,4,5,6	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	dBm/15 kHz	1,2,3,4,5,6	N/A	-85
N_{oc} Note2	dBm/SCS	1,2,4,5	N/A	-85
		3,6	N/A	-82
$\hat{E}_s / I_{ot}$		1,2,3,4,5,6	-infinity	0
$\hat{E}_s / N_{oc}$		1,2,3,4,5,6	-infinity	0
SS-RSRP Note3	dBm/SCS	1,2,4,5	-infinity	-85
		3,6	-infinity	-82
Io Note3	dBm/9.36MHz	1,2,4,5	N/A	-57
	dBm/38.1MHz	3,6	N/A	-51
Propagation condition		1,2,3,4,5,6	AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.6.3.1.14.2 Test Requirements

In this test, the UE shall start to transmit the PRACH to E-UTRA Cell 2 less than 85 ms Note1 from the beginning of time period T3.

The UE shall transmit the PRACH to PSCell no later than 117 ms Note2 from the start of T3'. The UE shall send at least one CSI report for PSCell with non-zero CQI index during T4'. The UE shall periodically send CSI reports for PSCell after the UE has sent first CQI report with non-zero CQI index during T4'.

The above test requirements shall be fulfilled in order of T1, T2, T3 for the observed inter-RAT handover delay from NR to E-UTRAN to be counted as correct, and in order of T1, T2, T3', T4' for the observed PSCell addition delay to be counted as correct.

The rate of correct handovers and correct PSCell addition delay during repeated tests shall be at least 90%.

NOTE1: The handover delay can be expressed as specified in clause 6.1.5.2:

$D_{HOwithPSCell_PCell}$ = RRC procedure delay + $T_{interrupt}$,

Where RRC procedure delay = 50 ms, $T_{interrupt} = T_{search_HO} + T_{IU} + T_{processing}$ is defined in clause 6.1.5.2.1, where

T_{search} = 0 ms

T_{IU} = 10 ms,

$T_{processing}$ = 25ms

Note2: The PSCell addition delay can be expressed as follows as specified in clause 6.1.5.2.2:

$D_{HOwithPSCell_PSCell} = T_{RRC_delay} + T_{processing} + T_{search_HO} + T_{search_PSCell} + T_{\Delta} + T_{PSCell_DU}$ + 2 ms

Where:

T_{RRC_delay} = 50 ms

$T_{processing}$ = 25ms

T_{search_HO} = 0

T_{search_PSCell} = 0

T_{Δ} = 20ms

T_{PSCell_DU} = 1*10+10 = 20ms

A.6.3.2 RRC Connection Mobility Control

A.6.3.2.1 SA: RRC Re-establishment

A.6.3.2.1.1 Intra-frequency RRC Re-establishment in FR1

A.6.3.2.1.1.1 Test Purpose and Environment

The purpose is to verify that the NR intra-frequency RRC re-establishment delay in FR1 with known target cell is within the specified limits. These tests will verify the requirements in clause 6.2.1.

The test parameters are given in table A.6.3.2.1.1.1-1, table A.6.3.2.1.1.1-2 and table A.6.3.2.1.1.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, is deactivated. The time period T3 starts after the occurrence of the radio link failure.

Table A.6.3.2.1.1.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.6.3.2.1.1.1-2: General test parameters for NR intra-frequency RRC Re-establishment test case in FR1

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3	Cell1	
	Neighbour cells		1, 2, 3	Cell2	
Final condition	Active cell		1, 2, 3	Cell2	
RF Channel Number			1, 2, 3	1	
Time offset between cells			1	3 ms	Asynchronous cells
			2	3 μs	Synchronous cells
			3	3 μs	Synchronous cells
N310		-	1, 2, 3	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1, 2, 3	1	Minimum consecutive in-sync indications from lower layers
T310		ms	1, 2, 3	0	Radio link failure timer;
T311		ms	1, 2, 3	3000	RRC re-establishment timer
Access Barring Information		-	1, 2, 3	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.2 FR1	
SMTC configuration			1	SMTC.2	
			2	SMTC.1	
			3	SMTC.1	
DRX cycle length		s	1, 2, 3	OFF	
PRACH configuration			1, 2, 3	FR1 PRACH configuration 1	Table A.3.8.2.1-1
T1		s	1, 2, 3	5	
T2		ms	1, 2, 3	240	Time for the UE to detect RLF (Summation of $T_{Evaluate_out_SSB}$ defined in clause 8.1 in TS 38.133, T310 and the period for UE turns off transmitter defined in clause 8.1.5 in TS 38.133)
T3		s	1, 2, 3	2	

Table A.6.3.2.1.1.1-3: Cell specific test parameters for NR intra-frequency RRC Re-establishment test case in FR1

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
PDSCH RMC configuration		1	SR.1.1 FDD			SR.1.1 FDD		
		2	SR.1.1 TDD			SR.1.1 TDD		
		3	SR.2.1 TDD			SR.2.1 TDD		
RMSI CORESET RMC configuration		1	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		

Dedicated CORESET RMC configuration		1	CCR.1.1 FDD			CCR.1.1 FDD		
		2	CCR.1.1 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
OCNG Pattern		1, 2, 3	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
TRS configuration		1	TRS.1.1 FDD			TRS.1.1 FDD		
		2	TRS.1.1 TDD			TRS.1.1 TDD		
		3	TRS.1.2 TDD			TRS.1.2 TDD		
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1			ULBWP.0.1		
Active DL BWP confgiuration		1, 2, 3	DLBWP.1.1	N/A	N/A	N/A	N/A	DLBWP.1.1
Active UL BWP configuration		1, 2, 3	ULBWP.1.1	N/A	N/A	N/A	N/A	ULBWP.1.1
RLM-RS		1, 2, 3	SSB			SSB		
$\hat{E}_s/I_{ot}$	dB	1	1.54	-infinity	-infinity	-3.79	4	4
		2						
		3						
N_{oc} Note2	dBm/SCS	1	-98					
		2	-98					
		3	-95					
N_{oc} Note2	dBm/15 kHz	1	-98					
		2						
		3						
$\hat{E}_s/N_{oc}$	dB	1	7	-infinity	-infinity	4	4	4
		2						
		3						
SS-RSRP Note3	dBm/SCS	1	-91	-infinity	-infinity	-94	-94	-94
		2	-91	-infinity	-infinity	-94	-94	-94
		3	-88	-infinity	-infinity	-91	-91	-91
Io	dBm/9.36 MHz	1	-60.74	-64.59	-64.59	-60.74	-64.59	-64.59
	dBm/9.36 MHz	2	-60.74	-64.59	-64.59	-60.74	-64.59	-64.59
	dBm/38.16 MHz	3	-54.65	-58.50	-58.50	-54.65	-58.50	-58.50
Propagation Condition		1, 2, 3	AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.3.2.1.1.2 Test Requirements

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to a known NR intra frequency cell shall be less than 1.6 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$T_{re\text{-}establish_delay} = T_{UL_grant} + T_{UE_re\text{-}establish_delay}$.

Where:

T_{UL_grant} = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence T_{UL_grant} is not used.

$T_{UE_re-establish_delay} = 50 \text{ ms} + T_{identify_intra_NR} + \sum_{i=1}^{Nfreq-1} T_{identify_inter_NR,i} + T_{SI-NR} + T_{PRACH}$

$N_{freq} = 1$

$T_{identify_intra_NR} = 200$ ms

$T_{SI} = 1280$ ms; it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target intra-frequency NR cell.

$T_{PRACH} = 15$ ms; it is the additional delay caused by the random access procedure.

This gives a total of 1545 ms, allow 1.6 s in the test case.

A.6.3.2.1.2 Inter-frequency RRC Re-establishment in FR1

A.6.3.2.1.2.1 Test Purpose and Environment

The purpose is to verify that the NR inter-frequency RRC re-establishment delay in FR1 without known target cell is within the specified limits. These tests will verify the requirements in clause 6.2.1.

The test parameters are given in table A.6.3.2.1.2.1-1, table A.6.3.2.1.2.1-2 and table A.6.3.2.1.2.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, becomes inactive. The time period T3 starts after the occurrence of the radio link failure. During T1, the UE shall be configured with the carrier frequency of cell 2 (with RF Channel Number #2) to ensure that the UE has the context of the carrier frequency of cell 2 by the end of T1.

Table A.6.3.2.1.2.1-1: Supported test configurations

Configuration	Description of serving cell	Description of target cell
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.6.3.2.1.2.1-2: General test parameters for NR inter-frequency RRC Re-establishment test case in FR1

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3	Cell1	
	Neighbour cells		1, 2, 3	Cell2	
Final condition	Active cell		1, 2, 3	Cell2	
RF Channel Number			1, 2, 3	1, 2	
Time offset between cells			1	3 ms	Asynchronous cells
			2	3 μs	Synchronous cells

		3	3 μs	Synchronous cells
N310	-	1, 2, 3	1	Maximum consecutive out-of-sync indications from lower layers
N311	-	1, 2, 3	1	Minimum consecutive in-sync indications from lower layers
T310	ms	1, 2, 3	0	Radio link failure timer;
T311	ms	1, 2, 3	5000	RRC re-establishment timer
Access Barring Information	-	1, 2, 3	Not Sent	No additional delays in random access procedure.
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
DRX cycle length	s	1, 2, 3	OFF	
PRACH configuration		1, 2, 3	FR1 PRACH configuration 1	Table A.3.8.2.1-1
T1	s	1, 2, 3	5	
T2	ms	1, 2, 3	240	Time for the UE to detect RLF (Summation of $T_{Evaluate_out_SSB}$ defined in clause 8.1 in TS 38.133, T310 and the period for UE turns off transmitter defined in clause 8.1.5 in TS 38.133)
T3	s	1, 2, 3	5	

Table A.6.3.2.1.2.1-3: Cell specific test parameters for NR inter-frequency RRC Re-establishment test case in FR1

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
RF Channel Number		1, 2, 3	1			2		
TDD configuration		1	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
PDSCH RMC configuration		1	SR.1.1 FDD			SR.1.1 FDD		
		2	SR.1.1 TDD			SR.1.1 TDD		
		3	SR.2.1 TDD			SR.2.1 TDD		
RMSI CORESET RMC configuration		1	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD			CCR.1.1 FDD		
		2	CCR.1.1 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
OCNG Pattern		1, 2, 3	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
TRS configuration		1	TRS.1.1 FDD			TRS.1.1 FDD		
		2	TRS.1.1 TDD			TRS.1.1 TDD		
		3	TRS.1.2 TDD			TRS.1.2 TDD		
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1			ULBWP.0.1		
Active DL BWP confgiuration		1, 2, 3	DLBWP.1.1	N/A	N/A	N/A	N/A	DLBWP.1.1

Active UL BWP configuration		1, 2, 3	ULBWP.1.1	N/A	N/A	N/A	N/A	ULBWP.1.1
RLM-RS		1, 2, 3	SSB			SSB		
$\hat{E}_s/I_{ot}$	dB	1	4	-infinity	-infinity	-infinity	-infinity	7
		2						
		3						
N_{oc} Note2	dBm/SCS	1	-98					
		2	-98					
		3	-95					
N_{oc} Note2	dBm/15 kHz	1	-98					
		2						
		3						
$\hat{E}_s/N_{oc}$	dB	1	4	-infinity	-infinity	-infinity	-infinity	7
		2						
		3						
SS-RSRP Note3	dBm/SCS	1	-94	-infinity	-infinity	-infinity	-infinity	-91
		2	-94	-infinity	-infinity	-infinity	-infinity	-91
		3	-91	-infinity	-infinity	-infinity	-infinity	-88
Io	dBm/9.36 MHz	1	-64.59	-70. 05	-70. 05	-70. 05	-70. 05	-62.26
	dBm/9.36 MHz	2	-64.59	-70. 05	-70. 05	-70. 05	-70.05	-62.26
	dBm/38.16 MHz	3	-58.50	-63.94	-63.94	-63.94	-63.94	-56.15
Propagation Condition		1, 2, 3	AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.3.2.1.2.2 Test Requirements

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to an unknown NR inter frequency cell shall be less than 3 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{re\text{-}establish_delay} = T_{UL_grant} + T_{UE_re\text{-}establish_delay}.$$

Where:

T_{UL_grant} = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence T_{UL_grant} is not used.

$$T_{UE_re-establish_delay} = 50\,ms + T_{identify_intra_NR} + \sum_{i=1}^{Nfreq-1} T_{identify_inter_NR,i} + T_{SI-NR} + T_{PRACH}$$

$N_{freq} = 2$

$T_{identify_intra_NR}$ = 800 ms

$T_{identify_inter_NR}$ = 800 ms

T_{SI} = 1280 ms; it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target inter-frequency NR cell.

T_{PRACH} = 15 ms; it is the additional delay caused by the random access procedure.

This gives a total of 2945 ms, allow 3 s in the test case.

A.6.3.2.1.3 Intra-frequency RRC Re-establishment in FR1 without serving cell timing

A.6.3.2.1.3.1 Test Purpose and Environment

The purpose is to verify that the NR intra-frequency RRC re-establishment delay in FR1 without serving cell timing is within the specified limits. These tests will verify the requirements in clause 6.2.1.

The test parameters are given in table A.6.3.2.1.3.1-1, table A.6.3.2.1.3.1-2 and table A.6.3.2.1.3.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, is deactivated. The time period T3 starts after the occurrence of the radio link failure.

Table A.6.3.2.1.3.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.6.3.2.1.3.1-2: General test parameters for NR intra-frequency RRC Re-establishment test case in FR1

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3	Cell1	
	Neighbour cells		1, 2, 3	Cell2	
Final condition	Active cell		1, 2, 3	Cell2	
RF Channel Number			1, 2, 3	1	
Time offset between cells			1	3 ms	Asynchronous cells
			2	3 µs	Synchronous cells
			3	3 µs	Synchronous cells
N310		-	1, 2, 3	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1, 2, 3	1	Minimum consecutive in-sync indications from lower layers
T310		ms	1, 2, 3	6000	Radio link failure timer configured by *RLF-TimersAndConstants*
T311		ms	1, 2, 3	3000	RRC re-establishment timer
Access Barring Information		-	1, 2, 3	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.2 FR1	
SMTC configuration			1	SMTC.2	
			2	SMTC.1	
			3	SMTC.1	
DRX cycle length		s	1, 2, 3	OFF	

PRACH configuration		1, 2, 3	FR1 PRACH configuration 1	Table A.3.8.2.1-1
T1	s	1, 2, 3	5	
T2	s	1, 2, 3	6.24	Time for the UE to detect RLF (Summation of $T_{Evaluate_out_SSB}$ defined in clause 8.1 in TS 38.133, T310 and the period for UE turns off transmitter defined in clause 8.1.5 in TS 38.133)
T3	s	1, 2, 3	3	

Table A.6.3.2.1.3.1-3: Cell specific test parameters for NR intra-frequency RRC Re-establishment test case in FR1

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
PDSCH RMC configuration		1	SR.1.1 FDD			SR.1.1 FDD		
		2	SR.1.1 TDD			SR.1.1 TDD		
		3	SR.2.1 TDD			SR.2.1 TDD		
RMSI CORESET RMC configuration		1	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD			CCR.1.1 FDD		
		2	CCR.1.1 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
OCNG Pattern		1, 2, 3	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1			DLBWP.0.1		
TRS Configuration		1	TRS.1.1.FDD			TRS.1.1.FDD		
		2	TRS.1.1.TDD			TRS.1.1.TDD		
		3	TRS.1.2.TDD			TRS.1.2.TDD		
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2, 3	SSB			SSB		
$\hat{E}_s/I_{ot}$	dB	1	4	-infinity	-infinity	-infinity	-infinity	4
		2						
		3						
N_{oc} Note2	dBm/SCS	1	-98					
		2	-98					
		3	-95					
N_{oc} Note2	dBm/15 kHz	1	-98					
		2						
		3						
$\hat{E}_s/N_{oc}$	dB	1	4	-infinity	-infinity	-infinity	-infinity	4
		2						
		3						
SS-RSRP Note3	dBm/SCS	1	-94	-infinity	-infinity	-infinity	-infinity	-94
		2	-94	-infinity	-infinity	-infinity	-infinity	-94
		3	-91	-infinity	-infinity	-infinity	-infinity	-91

Io	dBm/9.36 MHz	1	-64.59	-infinity	-infinity	-infinity	-infinity	-64.59
	dBm/9.36 MHz	2	-64.59	-infinity	-infinity	-infinity	-infinity	-64.59
	dBm/38.16 MHz	3	-58.50	-infinity	-infinity	-infinity	-infinity	-58.50
Propagation Condition		1, 2, 3	AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.3.2.1.3.2 Test Requirements

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to an unknown NR intra frequency cell without serving cell timing shall be less than 2.2 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{re\text{-}establish_delay} = T_{UL_grant} + T_{UE_re\text{-}establish_delay}.$$

Where:

T_{UL_grant} = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence T_{UL_grant} is not used.

$$T_{UE_re-establish_delay} = 50 \text{ ms} + T_{identify_intra_NR} + \sum_{i=1}^{Nfreq-1} T_{identify_inter_NR,i} + T_{SI-NR} + T_{PRACH}$$

$N_{freq} = 1$

$T_{identify_intra_NR} = 800$ ms

$T_{SI} = 1280$ ms; it is the time required for receiving all the relevant system information as defined in TS 38.331 [2] for the target intra-frequency NR cell.

$T_{PRACH} = 15$ ms; it is the additional delay caused by the random access procedure.

This gives a total of 2145 ms, allow 2.2 s in the test case.

A.6.3.2.2 Random Access

A.6.3.2.2.1 4-step RA type contention based random access test in FR1 for NR standalone

A.6.3.2.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in Clause 6.2.2.2 and Clause 7.1.2 in an AWGN model.

For this test one cell is used and configured as PCell in FR1. Supported test parameters are shown in Table A.6.3.2.2.1.1-1. UE capable of SA with PCell in FR1 needs to be tested by using the parameters in Table A.6.3.2.2.1.1-2.

Table A.6.3.2.2.1.1-1: Supported test configurations for contention based random access test in FR1 for NR standalone

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations depending on UE capability	

Table A.6.3.2.2.1.1-2: General test parameters for contention based random access test in FR1 for NR Standalone

Parameter		Unit	Test-1	Comments
SSB Configuration	Config 1		SSB pattern 1 in FR1	As defined in A.3.10, except for number of SSBs per SS-burst and SS/PBCH block index as below
	Config 2		SSB pattern 2 in FR1	
Number of SSBs per SS-burst			2	Different from the definition in A.3.10
SS/PBCH block index			0,1	Different from the definition in A.3.10
Duplex Mode for Cell 1	Config 1		FDD	
	Config 2		TDD	
TDD Configuration	Config 2		TDDConf.2.1	
CSI-RS for tracking	Config 1		TRS.1.1 FDD	
	Config 2		TRS.1.2 TDD	
OCNG Pattern Note 1			OP.1	As defined in A.3.2.1.
PDSCH parameters Note 4	Config 1		SR.1.1 FDD	As defined in A.3.1.1.
	Config 2		SR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	
	Config 2		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD	
	Config 2		CCR.2.1 TDD	
NR RF Channel Number			1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH_DMRS to SSS		dB		
EPRE ratio of PBCH to PBCH_DMRS		dB		
EPRE ratio of PDCCH_DMRS to SSS		dB		
EPRE ratio of PDCCH to PDCCH_DMRS		dB		
EPRE ratio of PDSCH_DMRS to SSS		dB		
EPRE ratio of PDSCH to PDSCH_DMRS		dB		
SSB with index 0	$\hat{E}_s / I_{ot}$	dB	3	Power of SSB with index 0 is set to be above configured *rsrp-ThresholdSSB*
	N_{oc} Config 1	dBm/15kHz	-98	
	N_{oc} Config 2		-101	
	$\hat{E}_s / N_{oc}$	dB	3	
	SS-RSRP Note 3	dBm/ SCS	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$	dB	-17	Power of SSB with index 1 is set to be below

					configured *rsrp-ThresholdSSB*
	N_{oc}	Config 1	dBm/15kHz	-98	
		Config 2		-101	
	$\hat{E}_s / N_{oc}$		dB	-17	
	SS-RSRP Note 3		dBm/ SCS	-115	
Io Note 2		Config 1	dBm	-65.3/9.36MHz	For symbols without SSB index 1
		Config 2		-62.2/38.16MHz	
ss-PBCH-BlockPower			dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [2].
Configured UE transmitted power ($P_{CMAX,\ f,c}$)			dBm	23	As defined in clause 6.2.4 in TS 38.101-1.
PRACH Configuration				FR1 PRACH configuration 1	As defined in A.3.8.
Propagation Condition			-	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.
Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.
Note 3: Void
Note 4: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.

A.6.3.2.2.1.2 Test Requirements

Contention based random access is triggered by *not* explicitly assigning a random access preamble via dedicated signalling in the downlink.

A.6.3.2.2.1.2.1 Random Access Preamble Transmission

To test the UE behavior specified in Clause 6.2.2.2.1.1 the System Simulator shall receive the Random Access Preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SS-RSRP above the configured *rsrp-ThresholdSSB*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.6.3.2.2.1.2.2 Random Access Response Reception

To test the UE behavior specified in Clause 6.2.2.2.1.2 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a Random Access Response *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for Random Access Response(s) and shall transmit the msg3 if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if all

received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.6.3.2.2.1.2.3 No Random Access Response Reception

To test the UE behavior specified in clause 6.2.2.2.1.3 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.6.3.2.2.1.2.4 Receiving an UL grant for msg3 retransmission

To test the UE behavior specified in clause 6.2.2.2.1.4 the System Simulator shall provide an UL grant for msg3 retransmission following a successful Random Access Response.

The UE shall re-transmit the msg3 upon the reception of an UL grant for msg3 retransmission.

A.6.3.2.2.1.2.5 Reception of an Incorrect Message over Temporary C-RNTI

To test the UE behavior specified in Clause 6.2.2.2.1.5 the System Simulator shall send a message addressed to the temporary C-RNTI with a UE Contention Resolution Identity included in the MAC control element *not* matching the CCCH SDU transmitted in msg3 uplink message.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires unless the received message includes a UE Contention Resolution Identity MAC control element and the UE Contention Resolution Identity included in the MAC control element matches the CCCH SDU transmitted in the uplink message.

A. 6.3.2.2.1.2.6 Reception of a Correct Message over Temporary C-RNTI

To test the UE behavior specified in Clause 6.2.2.2.1.5 the System Simulator shall send a message addressed to the temporary C-RNTI with a UE Contention Resolution Identity included in the MAC control element matching the CCCH SDU transmitted in the msg3 uplink message.

The UE shall send ACK if the Contention Resolution is successful.

A.6.3.2.2.1.2.7 Contention Resolution Timer expiry

To test the UE behavior specified in Clause 6.2.2.2.1.6 the System Simulator shall *not* send a response to a msg3.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if the Contention Resolution Timer expires.

A.6.3.2.2.2 4-step RA type non-contention based random access test in FR1 for NR standalone

A.6.3.2.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in Clause 6.2.2.2 and Clause 7.1.2 in an AWGN model.

For this test one cell is used and configured as PCell in FR1. Supported test parameters are shown in Table A.6.3.2.2.2.1-1. UE capable of SA with PCell in FR1 needs to be tested by using the parameters in Table A.6.3.2.2.2.1-2 for SSB-based non-contention based random access test (Test 1) and CSI-RS-based non-contention based random access test (Test 2). Test 2 is only applicable to UE which supports csi-RSRP-AndRSRQ-MeasWithSSB or csi-RSRP-AndRSRQ-MeasWithoutSSB.

Table A.6.3.2.2.2.1-1: Supported test configurations for non-contention based random access test in FR1 for NR standalone

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations depending on UE capability	

Table A.6.3.2.2.2.1-2: General test parameters for non-contention based random access test in FR1 for NR Standalone

Parameter		Unit	Test-1	Test-2	Comments
SSB Configuration	Config 1		SSB pattern 1 in FR1	SSB pattern 1 in FR1	As defined in A.3.10, except for number of SSBs per SS-burst and SS/PBCH block index as below
	Config 2		SSB pattern 2 in FR1	SSB pattern 2 in FR1	
Number of SSBs per SS-burst			2	2	Different from the definition in A.3.10
SS/PBCH block index			0,1	0,1	Different from the definition in A.3.10
CSI-RS Configuration	Config 1		N/A	CSI-RS.1.1 FDD	As defined in A.3.1.4
	Config 2			CSI-RS.2.1 TDD	
Duplex Mode for Cell 1	Config 1		FDD	FDD	
	Config 2		TDD	TDD	
TDD Configuration	Config 2		TDDConf.2.1	TDDConf.2.1	
CSI-RS for tracking	Config 1		TRS.1.1 FDD	TRS.1.1 FDD	
	Config 2		TRS.1.2 TDD	TRS.1.2 TDD	
OCNG Pattern Note 1			OP.1	OP.1	As defined in A.3.2.1.
PDSCH parameters Note 4	Config 1		SR.1.1 FDD	SR.1.1 FDD	As defined in A.3.1.1.
	Config 2		SR.2.1 TDD	SR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1		CR.1.1 TDD	CR.1.1 TDD	
	Config 2		CR.2.1 TDD	CR.2.1 TDD	

Dedicated CORESET Reference Channel		Config 1		CCR.1.1 TDD	CCR.1.1 TDD	
		Config 2		CCR.2.1 TDD	CCR.2.1 TDD	
NR RF Channel Number				1	1	
EPRE ratio of PSS to SSS			dB	0	0	
EPRE ratio of PBCH_DMRS to SSS			dB			
EPRE ratio of PBCH to PBCH_DMRS			dB			
EPRE ratio of PDCCH_DMRS to SSS			dB			
EPRE ratio of PDCCH to PDCCH_DMRS			dB			
EPRE ratio of PDSCH_DMRS to SSS			dB			
EPRE ratio of PDSCH to PDSCH_DMRS			dB			
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	3	Power of SSB with index 0 is set to be above configured *rsrp-ThresholdSSB*
	N_{oc}	Config 1	dBm/15kHz	-98	-98	
		Config 2		-101	-101	
	$\hat{E}_s / N_{oc}$		dB	3	3	
	SS-RSRP Note 3		dBm/ SCS	-95	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	-17	Power of SSB with index 1 is set to be below configured *rsrp-ThresholdSSB*
	N_{oc}	Config 1	dBm/15kHz	-98	-98	
		Config 2		-101	-101	
	$\hat{E}_s / N_{oc}$		dB	-17	-17	
	SS-RSRP Note 3		dBm/ SCS	-115	-115	
Io Note 2		Config 1	dBm	-65.3/9.36MHz	-65.3/9.36MHz	For symbols without SSB index 1
		Config 2		-62.2/38.16MHz	-62.2/38.16MHz	
ss-PBCH-BlockPower			dBm/ SCS	-5	-5	As defined in clause 6.3.2 in TS 38.331 [2].
Configured UE transmitted power ($P_{\mathrm{CMAX},\ f,c}$)			dBm	23	23	As defined in clause 6.2.4 in TS 38.101-1.
PRACH Configuration				FR1 PRACH configuration 2	FR1 PRACH configuration 3	As defined in A.3.8.2.
Propagation Condition			-	AWGN	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.
Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.
Note 3: Void
Note 4: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.

A.6.3.2.2.2.2 Test Requirements

Non-Contention based random access is triggered by explicitly assigning a random access preamble via dedicated signalling in the downlink. In the test, the non-contention based random access procedure is not initialized for Other SI requested from UE or beam failure recovery.

A.6.3.2.2.2.2.1 SSB-based Random Access Preamble Transmission

In Test-1, to test the UE behavior specified in Clause 6.2.2.2.2.1 for SSB-based Random Access Preamble tranmsision, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs configured, the System Simulator shall receive the Random Access Preamble which has the Preamble Index associated with the SSB with index 0.

In addition, the System Simulator shall receive the Random Access Preamble on the PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0, and the selected PRACH occasion shall belongs to the PRACH occassions permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.6.3.2.2.2.2.2 CSI-RS-based Random Access Preamble Transmission

In Test-2, to test the UE behavior specified in Clause 6.2.2.2.2.1 for CSI-RS-based Random Access Preamble tranmsision, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with CSI-RSs configured, the System Simulator shall receive the Random Access Preamble which has the Preamble Index associated with the CSI-RS configured.

In addition, the System Simulator shall receive the Random Access Preamble on the PRACH occasion which belongs to the PRACH occasions corresponding to the CSI-RS configured, and the selected PRACH occasion shall belongs to the PRACH occassions permitted by the restrictions given by the *ra-OccasionList*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.6.3.2.2.2.2.3 Random Access Response Reception

To test the UE behavior specified in Clause 6.2.2.2.2.2 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a Random Access Response *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for Random Access Response(s) if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.6.3.2.2.2.4 No Random Access Response Reception

To test the UE behavior specified in clause 6.2.2.2.3 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window configured in *RACH-ConfigCommon*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.6.3.2.2.3 2-step RA type contention based random access test in FR1 for NR standalone

A.6.3.2.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the 2-step RA type random access procedure is according to the requirements and that the MsgA PRACH, MsgA PUSCH power settings and timing are within specified limits. This test will verify the requirements in Clause 6.2.2.3 and Clause 7.1.2 in an AWGN model.

For this test one cell is used and configured as PCell in FR1. Supported test parameters are shown in Table A.6.3.2.2.3.1-1. UE capable of SA with PCell in FR1 needs to be tested by using the parameters in Table A.6.3.2.2.3.1-2.

Table A.6.3.2.2.3.1-1: Supported test configurations for 2-step RA type contention based random access with successRAR test in FR1 for NR standalone

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations depending on UE capability	

Table A.6.3.2.2.3.1-2: General test parameters for 2-step RA type contention based random access with successRAR test in FR1 for NR standalone

Parameter		Unit	Test-1	Comments
SSB Configuration	Config 1		SSB pattern 1 in FR1	As defined in A.3.10, except for number of SSBs per SS-burst and SS/PBCH block index as below
	Config 2		SSB pattern 2 in FR1	
Number of SSBs per SS-burst			2	Different from the definition in A.3.10
SS/PBCH block index			0,1	Different from the definition in A.3.10
Duplex Mode for Cell 2	Config 1		FDD	
	Config 2		TDD	
TDD Configuration	Config 2		TDDConf.2.1	
OCNG Pattern Note 1			OP.1	As defined in A.3.2.1.

PDSCH parameters Note 3		Config 1		SR.1.1 FDD	As defined in A.3.1.1.
		Config 2		SR.2.1 TDD	
NR RF Channel Number				1	
EPRE ratio of PSS to SSS			dB	0	
EPRE ratio of PBCH_DMRS to SSS			dB		
EPRE ratio of PBCH to PBCH_DMRS			dB		
EPRE ratio of PDCCH_DMRS to SSS			dB		
EPRE ratio of PDCCH to PDCCH_DMRS			dB		
EPRE ratio of PDSCH_DMRS to SSS			dB		
EPRE ratio of PDSCH to PDSCH_DMRS			dB		
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	Power of SSB with index 0 is set to be above configured *msgA-RSRP-ThresholdSSB*
	N_{oc}	Config 1	dBm/15kHz	-98	
		Config 2		-101	
	$\hat{E}_s / N_{oc}$		dB	3	
	SS-RSRP		dBm/ SCS	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured *msgA-RSRP-ThresholdSSB*
	N_{oc}	Config 1	dBm/15kHz	-98	
		Config 2		-101	
	$\hat{E}_s / N_{oc}$		dB	-17	
	SS-RSRP		dBm/ SCS	-115	
Io Note 2		Config 1	dBm	-65.3/9.36MHz	For symbols without SSB index 1
		Config 2		-62.2/38.16MHz	
ss-PBCH-BlockPower			dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [2].
Configured UE transmitted power ($P_{CMAX,\ f,c}$)			dBm	23	As defined in clause 6.2.4 in TS 38.101-1.
MsgA Configuration				FR1 MsgA configuration 1	As defined in A.3.20.2.1.
msgA-RSRP-ThresholdSSB			dBm	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [2].
Propagation Condition			-	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.
Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.
Note 3: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.

A.6.3.2.2.3.2 Test Requirements

Contention based random access is triggered by *not* explicitly assigning a random access preamble via dedicated signalling in the downlink.

A.6.3.2.2.3.2.1 MsgA Transmission

To test the UE behavior specified in Clause 6.2.2.3.1.1 the System Simulator shall receive the MsgA with a preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SS-RSRP above the configured *msgA-RSRP-ThresholdSSB.*

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first MsgA preamble transmission shall be -22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.6.3.2.2.3.2.2 MsgB Reception

To test the UE behavior specified in Clause 6.2.2.3.1.2 the System Simulator shall transmit a MsgB containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a MsgB *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for MsgB(s) and shall transmit an ACK if the MsgB with a successRAR contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble and if the Contention Resolution is successful.

The UE may stop monitoring for MsgB(s) and shall transmit the msg3 if the MsgB with a fallbackRAR contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires if all received MsgB(s) contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first preamble shall be -22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.6.3.2.2.3.2.3 No MsgB Reception

To test the UE behavior specified in clause 6.2.2.3.1.3 the System Simulator shall transmit a MsgB containing a successRAR message and a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires if no MsgB is received within the MsgB Response window.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first preamble shall be -22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.6.3.2.2.4 2-step RA type non-contention based test in FR1 for NR standalone

A.6.3.2.2.4.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the MsgA PRACH, MsgA PUSCH power settings and timing are within specified limits. This test will verify the requirements in Clause 6.2.2.3 and Clause 7.1.2 in an AWGN model.

For this test one cell is used and configured as PCell in FR1. Supported test parameters are shown in Table A.6.3.2.2.4.1-1. UE capable of SA with PCell in FR1 needs to be tested by using the parameters in Table A.6.3.2.2.4.1-2.

Table A.6.3.2.2.4.1-1: Supported test configurations for non-contention based random access test in FR1 for NR standalone

Config	Description
1	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations depending on UE capability	

Table A.6.3.2.2.4.1-2: General test parameters for non-contention based random access test in FR1 for NR Standalone

Parameter			Unit	Test-1	Comments
SSB Configuration		Config 1		SSB pattern 2 in FR1	As defined in A.3.10, except for number of SSBs per SS-burst and SS/PBCH block index as below
Number of SSBs per SS-burst				2	Different from the definition in A.3.10
SS/PBCH block index				0,1	Different from the definition in A.3.10
Duplex Mode for Cell 1		Config 1		TDD	
TDD Configuration		Config 1		TDDConf.2.1	
OCNG Pattern Note 1				OP.1	As defined in A.3.2.1.
PDSCH parameters Note 4		Config 1		SR.2.1 TDD	As defined in A.3.1.1.
NR RF Channel Number				1	
EPRE ratio of PSS to SSS			dB	0	
EPRE ratio of PBCH_DMRS to SSS			dB		
EPRE ratio of PBCH to PBCH_DMRS			dB		
EPRE ratio of PDCCH_DMRS to SSS			dB		
EPRE ratio of PDCCH to PDCCH_DMRS			dB		
EPRE ratio of PDSCH_DMRS to SSS			dB		
EPRE ratio of PDSCH to PDSCH_DMRS			dB		
msgA-*RSRP-ThresholdSSB*			dBm	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [2].
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	Power of SSB with index 0 is set to be above configured
	N_{oc}	Config 1	dBm/15kHz	-101	

	$\hat{E}_s/N_{oc}$		dB	3	msgA-*RSRP-ThresholdSSB*
	SS-RSRP Note 3		dBm/ SCS	-95	
SSB with index 1	$\hat{E}_s/I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured msgA-*RSRP-ThresholdSSB*
	N_{oc}	Config 1	dBm/15kHz	-101	
	$\hat{E}_s/N_{oc}$		dB	-17	
	SS-RSRP Note 3		dBm/ SCS	-115	
Io Note 2		Config 1	dBm	-62.2/38.16MHz	For symbols without SSB index 1
ss-PBCH-BlockPower			dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [2].
Configured UE transmitted power ($P_{CMAX,\ f,\ c}$)			dBm	23	As defined in clause 6.2.4 in TS 38.101-1.
MsgA Configuration				FR1 MsgA configuration 2	As defined in A.3.20.2.2.
Propagation Condition			-	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.
Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.
Note 3: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.

A.6.3.2.2.4.2 Test Requirements

Non-Contention based random access is triggered by explicitly assigning a random access preamble via dedicated signalling in the downlink. In the test, the non-contention based random access procedure is not initialized for Other SI requested from UE or beam failure recovery.

A.6.3.2.2.4.2.1 MsgA Transmission

To test the UE behavior specified in Clause 6.2.2.3.2.1, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs configured, the System Simulator shall receive the MsgA with a preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0.

In addition, the System Simulator shall receive the MsgA PRACH on the PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0, and the selected PRACH occasion shall belongs to the PRACH occasions permitted by the restrictions given first by the *msgA-SSB-SharedRO-MaskIndex* if configured, or next by the *ra-ssb-OccasionMaskIndex* if configured.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first preamble shall be -22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.6.3.2.2.4.2.2 MsgB Reception

To test the UE behavior specified in Clause 6.2.2.3.2.2 the System Simulator shall transmit a MsgB containing a fallbackRAR containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a MsgB *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for MsgB(s) and shall transmit the msg3 containing the payload of MsgA PUSCH if the MsgB with a fallbackRAR contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble. The UE shall monitor contention resolution as described in clause 8.2A in TS 38.213 [3].

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires if all received MsgB's contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first preamble shall be -22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA and msg3 transmissions shall be within the accuracy specified in Clause 7.1.2.

A.6.3.2.2.4.2.3 No MsgB Reception

To test the UE behavior specified in clause 6.2.2.3.2.3 the System Simulator shall transmit a MsgB containing a successRAR message and a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA transmission power when the backoff time expires if no MsgB is received within the MsgB Response window.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first preamble shall be -22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.6.3.2.3 SA: RRC Connection Release with Redirection

A.6.3.2.3.1 Redirection from NR in FR1 to NR in FR1

A.6.3.2.3.1.1 Test Purpose and Environment

This test is to verify RRC connection release with redirection from NR to NR requirements specified in clause 6.2.3.2.1.

A.6.3.2.3.1.2 Test Parameters

Supported test configurations are shown in table A.6.3.2.3.1.2-1. The time delay is tested by using the parameters in table A.6.3.2.3.1.2-2, and A.6.3.2.3.1.2-3.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. The *RRCRelease* message shall be sent to the UE during period T1 and the start of T2 is the instant when the last TTI containing the RRC message is sent to the UE. Prior to time duration T2, the UE shall not have any timing information of Cell 2. Cell 2 is powered up at the beginning of the T2. Cell 1 and Cell 2 belong to different tracking areas.

Table A.6.3.2.3.1.2-1: Redirection from NR to NR test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode

	Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.3.2.3.1.2-2: General test parameters for Redirection from NR to NR test case

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	2.3	

Table A.6.3.2.3.1.2-3: Cell specific test parameters for Redirection from NR to NR test case

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number			1		2	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
SSB Configuration	Config 1		SSB.1 FR1			
	Config 2		SSB.1 FR1			
	Config 3		SSB.2 FR1			
CSI-RS for tracking	Config 1		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
DRx Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD			
	Config 2		SR.1.1 TDD			
	Config 3		SR2.1 TDD			
CORESET Reference Channel	Config 1		CR.1.1 FDD			
	Config 2		CR.1.1 TDD			
	Config 3		CR2.1 TDD			
OCNG Patterns			OCNG pattern 1			
SMTC configuration	Config 1,2		SMTC.1 FR1			
	Config 3		SMTC.2 FR1			
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			

PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
PRACH configuration			FR1 PRACH configuration 1			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-98			
N_{oc} Note2	Config 1,2	dBm/SCS	-98			
	Config 3		-95			
$\hat{E}_s/I_{ot}$		dB	4	4	-infinity	4
$\hat{E}_s/N_{oc}$		dB	4	4	-infinity	4
Io Note3	Config 1,2	dBm/ 9.36MHz	-64.59	-64.59	-70.05	-64.59
	Config 3	dBm/ 38.16MHz	-58.49	-58.49	-63.94	-58.49
Propagation condition		-	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.3.2.3.1.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 2240 ms from the beginning of time period T2.
The rate of correct RRC connection release redirection to NR observed during repeated tests shall be at least 90%.

NOTE: The redirection delay can be expressed as:

$$T_{connection_release_redirect_NR} = T_{RRC_procedure_delay} + T_{identify\text{-}NR} + T_{SI\text{-}NR} + T_{RACH},$$

where:

$T_{RRC_procedure_delay}$ = 110 msin the test.

$T_{identify\text{-}NR}$ = 680 ms in the test.

$T_{SI\text{-}NR}$ = 1280 ms, it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target NR cell.

T_{RACH} = 170 ms in the test.

This gives a total of 2240 ms.

A.6.3.2.3.2 Redirection from NR in FR1 to E-UTRAN

A.6.3.2.3.2.1 Test Purpose and Environment

This test is to verify RRC connection release with redirection from NR to E-UTRAN requirements specified in clause 6.2.3.2.2.

A.6.3.2.3.2.2 Test Parameters

Supported test configurations are shown in table A.6.3.2.3.2.2-1. The time delay is tested by using the parameters in table A.6.3.2.3.2.2-2, A.6.3.2.3.2.2-3 and A.6.3.2.3.2.2-4.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. The *RRCRelease* message shall be sent to the UE during period T1 and the start of T2 is the instant when the last TTI containing the RRC message is sent to the UE. Prior to time duration T2, the UE shall not have any timing information of Cell 2. Cell 2 is powered up at the beginning of the T2.

Table A.6.3.2.3.2.2-1: Redirection from NR to E-UTRAN test configurations

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.3.2.3.2.2-2: General test parameters for Redirection from NR to E-UTRAN test case

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 µs	Synchronous cells
T1		s	5	
T2		s	2.3	

Table A.6.3.2.3.2.2-3: Cell specific test parameters for Redirection from NR to E-UTRAN (cell 1)

Parameter		Unit	Cell 1	
			T1	T2
RF Channel Number			1	
Duplex mode	Config 1,4		FDD	
	Config 2,3,5,6		TDD	
SSB Configuration	Config 1,4		SSB.1 FR1	
	Config 2,5		SSB.1 FR1	
	Config 3,6		SSB.2 FR1	
CSI-RS for tracking	Config 1,4		TRS.1.1 FDD	
	Config 2,5		TRS.1.1 TDD	
	Config 3,6		TRS.1.2 TDD	
TDD configuration	Config 1,4		Not Applicable	
	Config 2,5		TDDConf.1.1	

	Config 3,6		TDDConf.2.1	
$BW_{channel}$	Config 1,4	MHz	10: $N_{RB,c}$ = 52	
	Config 2,5		10: $N_{RB,c}$ = 52	
	Config 3,6		40: $N_{RB,c}$ = 106	
BWP BW	Config 1,4	MHz	10: $N_{RB,c}$ = 52	
	Config 2,5		10: $N_{RB,c}$ = 52	
	Config 3,6		40: $N_{RB,c}$ = 106	
DRx Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	
	Config 2,5		SR.1.1 TDD	
	Config 3,6		SR2.1 TDD	
CORESET Reference Channel	Config 1,4		CR.1.1 FDD	
	Config 2,5		CR.1.1 TDD	
	Config 3,6		CR2.1 TDD	
OCNG Patterns			OCNG pattern 1	
SMTC configuration	Config 1,2,4,5		SMTC.1 FR1	
	Config 3,6		SMTC.2 FR1	
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15 kHz	
	Config 3,6		30 kHz	
PUCCH/PUSCH subcarrier spacing	Config 1,2,4,5	kHz	15 kHz	
	Config 3,6		30 kHz	
PRACH configuration			FR1 PRACH configuration 1	
BWP configuration	Initial DL BWP		DLBWP.0.1	
	Dedicated DL BWP		DLBWP.1.1	
	Initial UL BWP		ULBWP.0.1	
	Dedicated UL BWP		ULBWP.1.1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2		dBm/15kHz	-98	
N_{oc} Note2	Config 1,2,4,5	dBm/SCS	-98	
	Config 3,6		-95	
$\hat{E}_s / I_{ot}$		dB	4	4
$\hat{E}_s / N_{oc}$		dB	4	4
Io Note3	Config 1,2,4,5	dBm/ 9.36MHz	-64.59	-64.59
	Config 3,6	dBm/ 38.16MHz	-58.49	-58.49
Propagation condition		-	AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.6.3.2.3.2.2-4: Cell specific test parameters for Redirection from NR to E-UTRAN (cell 2)

Parameter	Unit	Configuration	Cell 2	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6	2	
Duplex mode		1, 2, 3	FDD	
		4, 5, 6	TDD	
TDD special subframe configuration[Note1]		4, 5, 6	6	
TDD uplink-downlink configuration[Note1]		4, 5, 6	1	
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PRACH Configuration[Note2]		1, 2, 3	4	
		4, 5, 6	53	
PDSCH parameters: DL Reference Measurement Channel[Note3]		1, 2, 3	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note3]		1, 2, 3	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note3]		1, 2, 3	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note4]				
OCNG_RB[Note4]				
N_{oc}[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6	-98	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	-Infinity	4
$\hat{E}_s/I_{ot}$[Note6]	dB	1, 2, 3, 4, 5, 6	-Infinity	4
RSRP[Note6]	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-94
SCH_RP[Note6]	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-94
Io[Note6]	dBm/9MHz	1, 2, 3, 4, 5, 6	-70.22	-64.76
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN	
Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].				

Note 2:	PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [23].
Note 3:	DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 4:	OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 5:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 6:	$\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 7:	Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].

A.6.3.2.3.2.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 2205 ms from the beginning of time period T2.
The rate of correct RRC connection release redirection to E-UTRAN observed during repeated tests shall be at least 90%.

NOTE: The redirection delay can be expressed as:

$$T_{connection_release_redirect_E\text{-}UTRA} = T_{RRC_procedure_delay} + T_{identify\text{-}E\text{-}UTRA} + T_{SI\text{-}E\text{-}UTRA} + T_{RACH},$$

where:

$T_{RRC_procedure_delay}$ = 110 ms in the test.

$T_{identify\text{-}E\text{-}UTRA}$ = 800 ms in the test.

$T_{SI\text{-}E\text{-}UTRA}$ = 1280 ms, it is the time required for receiving all the relevant system information as defined in TS 36.331 for the target E-UTRA cell.

T_{RACH} = 15 ms in the test.

This gives a total of 2205 ms.

A.6.3.3 Conditional handover

A.6.3.3.1 Intra-frequency conditional handover from FR1 to FR1

A.6.3.3.1.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR1-NR FR1 intra frequency conditional handover requirements specified in clause 6.1.4.2.

A.6.3.3.1.2 Test Parameters

Supported test configurations are shown in table A.6.3.3.1.2-1. Both conditional handover delay and interruption length are tested by using the parameters in table A.6.3.3.1.2-2, and A.6.3.3.1.2-3.

The test consists of two successive time periods, with time durations of T1 and T2 respectively. At the start of time duration T1, the UE may not have any timing information of cell 2.

NR shall configure a condition implying handover to cell 2 during T1, at a time earlier than T_{RRC} before the beginning of T2.

Table A.6.3.3.1.2-1: Intra-frequency conditional handover from FR1 to FR1 test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode

	Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.3.3.1.2-2: General test parameters Intra-frequency conditional handover from FR1 to FR1

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
A3-Offset in condition		dB	0	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
PRACH configuration index			FR1 PRACH configuration 1	As specified in table Table 6.3.3.2-3 in TS 38.211 [6]
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	≤2	

Table A.6.3.3.1.2-3: Cell specific test parameters for NR FR1-FR1 Intra frequency conditional handover test case

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number			1		1	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
DRx Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD			
	Config 2		SR.1.1 TDD			
	Config 3		SR2.1 TDD			
CORESET Reference Channel	Config 1		CR.1.1 FDD			
	Config 2		CR.1.1 TDD			
	Config 3		CR2.1 TDD			
TRS configuration	Config 1		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
OCNG Patterns			OCNG pattern 1			
SMTC Configuration			SMTC pattern 1			
SSB Configuration	Config 1,2		SSB.1 FR1			
	Config 3		SSB.2 FR1			
	Config 1,2	kHz	15 kHz			

PDSCH/PDCCH subcarrier spacing	Config 3		30 kHz			
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
PRACH configuration			FR1 PRACH configuration 1			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-98			
N_{oc} Note2	Config 1,2	dBm/SCS	-98			
	Config 3		-95			
$\hat{E}_s/I_{ot}$		dB	8	-3.3	-Infinity	2.36
$\hat{E}_s/N_{oc}$		dB	8	8	-Infinity	11
SSB_RP	Config 1,2	dBm/SCS	-90	-90	-Infinity	-87
	Config 3	dBm/SCS	-87	-87	-Infinity	-84
Io Note3	Config 1,2	dBm/ 9.36MHz	-61.41	-57.06	-61.41	-57.06
	Config 3	dBm/ 38.16MHz	-55.31	-50.96	-55.31	-50.96
Propagation condition		-	AWGN			AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.3.3.1.3 Test Requirements

$T_{RRC} + T_{Event_DU}$ occurs during T1 as the handover condition becomes satisfied at the start of T2. The test shall verify that there are no interruptions during T1.

The UE shall start to transmit the PRACH to Cell 2 less than $T_{measure} + T_{interrupt} + T_{CHO_execution}$ = 800 +62 +10=872ms from the start of T2 and the interruption during T2 shall not exceeed $T_{interrupt}=T_{processing} + T_{IU} + T_{\Delta} + T_{margin}$ =40+20+2 = 62ms

A.6.3.3.2 Inter-frequency conditional handover from FR1 to FR1

A.6.3.3.2.1 Test Purpose and Environment

This test is to verify the requirement for the NR conditional FR1-NR FR1 inter frequency conditional handover requirements specified in clause 6.1.4.2.

A.6.3.3.2.2 Test Parameters

Supported test configurations are shown in table A.6.3.3.2.2-1. Both conditional handover delay and interruption length are tested by using the parameters in table A.6.3.3.2.2-2, and A.6.3.3.2.2-3.

The test scenario comprises of two carriers and one cell on each carrier Gap pattern ID gp0 is configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. NR shall configure a condition implying handover to cell 2 during T1, at a time earlier than T_{RRC} before the beginning of T2. At the start of T2, cell 2 becomes detectable and meets the handover condition.

Table A.6.3.3.2.2-1: Inter-frequency handover from FR1 to FR1 test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.3.3.2.2-2: General test parameters Inter-frequency handover from FR1 to FR1

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
A3-Offset in handover condition		dB	-4	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
T1		s	5	
T2		s	≤2	

Table A.6.3.3.2.2-3: Cell specific test parameters for NR FR1-FR1 Inter frequency handover test case

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number			1		2	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52			

	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
TRS configuration	Config 1		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
DRx Cycle		ms	Not Applicable			
Gap pattern ID			gp0			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD			
	Config 2		SR.1.1 TDD			
	Config 3		SR2.1 TDD			
CORESET Reference Channel	Config 1		CR.1.1 FDD			
	Config 2		CR.1.1 TDD			
	Config 3		CR2.1 TDD			
OCNG Patterns			OCNG pattern 1			
SMTC Configuration			SMTC pattern 1			
SSB Configuration	Config 1,2		SSB.1 FR1			
	Config 3		SSB.2 FR1			
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
PRACH configuration			FR1 PRACH configuration 1			
BWP	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-98		-98	
N_{oc} Note2	Config 1,2	dBm/SCS	-98		-98	
	Config 3		-95		-95	
$\hat{E}_s / I_{ot}$		dB	4	4	-Infinity	5
$\hat{E}_s / N_{oc}$		dB	4	4	-Infinity	5
SSB_RP	Config 1,2	dBm/SCS	-94	-94	-Infinity	-93
	Config 3	dBm/SCS	-91	-91	-Infinity	-90
Io Note3	Config 1,2	dBm/ 9.36MHz	-64.59	-64.59	-70.05	-63.85
	Config 3	dBm/ 38.16MHz	-58.49	-58.49	-63.94	-57.75
Propagation condition		-	AWGN		AWGN	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.3.3.2.3 Test Requirements

T_{RRC} + T_{Event_DU} occurs during T1 as the handover condition becomes satisfied at the start of T2. The test shall verify that there are no interruptions during T1.

The UE shall start to transmit the PRACH to Cell 2 less than $T_{measure}$ + $T_{interrupt}$ + $T_{CHO_execution}$ =920 +62 +10=992 ms from the start of T2 and the interruption during T2 shall not exceeed $T_{interrupt}$=$T_{processing}$ + T_{IU} + T_{Δ} + T_{margin} =40+20+2 = 62ms excluding any transmissions which do not occur due to measurement gaps.

Inter-frequency CHO FR1-FR1 920 (Tmeasure)+62 (Tinterrupt)+10 (TCHO_execution) = 992 62 m

A.6.4 Timing

A.6.4.1 UE transmit timing

A.6.4.1.1 NR UE Transmit Timing Test for FR1

A.6.4.1.1.1 Test Purpose and environment

The purpose of this test is to verify that the UE can follow frame timing change of the connected gNodeb and that the UE initial transmit timing accuracy, maximum amount of timing change in one adjustment, minimum and maximum adjustment rate are within the specified limits. This test will verify the requirements in clause 7.1.2.

Supported test configurations are shown in Table A.6.4.1.1.1-1.

Table A.6.4.1.1.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NR TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
3	NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

For this test a single NR cell is used. Table A.6.4.1.1.1-2 defines the parameters to be configured and strength of the transmitted signals. The transmit timing is verified by the UE transmitting SRS using the configuration defined in Table A.6.4.1.1.1-3.

Table A.6.4.1.1.1-2: Cell Specific Test Parameters for UL Transmit Timing test

Parameter	Unit	Config	Test1	Test2
SSB ARFCN		1,2,3	1	1
TDD configuration		1	Not Applicable	
		2	TDDConf.1.1	
		3	TDDConf.2.1	
$BW_{channel}$	MHz	1	10: $N_{RB,c}$ = 52	
		2	10: $N_{RB,c}$ = 52	
		3	40: $N_{RB,c}$ = 106	
Initial BWP Configuration		1,2,3	DLBWP.0.1 ULBWP.0.1	

Dedicated BWP Configuration		1,2,3	DLBWP.1.1 ULBWP.1.1	
DRx Cycle	ms	1,2,3	N/A	DRX.8[Note5]
PDSCH Reference measurement channel		1	SR.1.1 FDD	
		2	SR.1.1 TDD	
		3	SR.2.1 TDD	
RMSI CORESET Reference Channel		1	CR.1.1 FDD	
		2	CR.1.1 TDD	
		3	CR.2.1 TDD	
Dedicated CORESET Reference Channel		1	CCR.1.1 FDD	
		2	CCR.1.1 TDD	
		3	CCR.2.1 TDD	
OCNG Patterns		1,2,3	OP.1	
SSB configuration		1,2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC Configuration		1,2	SMTC.1	
		3	SMTC.2	
TRS configuration		1	TRS.1.1 FDD	
		2	TRS.1.1 TDD	
		3	TRS.1.2 TDD	
EPRE ratio of PSS to SSS	dB	1,2,3	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} [Note2]	dBm/15 kHz	1,2,3	-98	-98
N_{oc} [Note2]	dBm/SCS	1,2	-98	-98
		3	-95	-95
$\hat{E}_s / I_{ot}$		1,2,3	3	3
$\hat{E}_s / N_{oc}$		1,2,3	3	3
SS-RSRP[Note3]	dBm/SCS	1,2	-95	-95
		3	-92	-92
Io[Note3]	dBm/9.36MHz	1,2	-65.2	-65.2
	dBm/38.1MHz	3	-59.2	-59.2
Propagation condition		1,2,3	AWGN	
SRS Config		1,2	SRSConf.1[Note6]	SRSConf.3[Note6]
		3	SRSConf.1[Note6]	SRSConf.2[Note6]
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				

Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	DRx related parameters are given in Table A.3.3.8-1
Note 6:	SRS configs are given in Table A.6.4.1.1.1-3

Table A.6.4.1.1.1-3: SRS Configuration for Timing Accuracy Test

	Field	SRSConf.1	SRSConf.2	SRSConf.3	Comments
SRS-ResourceSet	srs-ResourceSetId	0	0	0	
	srs-ResourceIdList	0	0	0	
	resourceType	Periodic	Periodic	Periodic	
	Usage	Codebook	Codebook	Codebook	
SRS-Resource	SRS-ResourceId	0	0	0	
	nrofSRS-Ports	Port1	Port1	Port1	
	transmissionComb	n2	n2	n2	
	combOffset-n2	0	0	0	
	cyclicShift-n2	0	0	0	
	resourceMapping startPosition	0	0	0	
	resourceMapping nrofSymbols	n1	n1	n1	
	resourceMapping repetitionFactor	n1	n1	n1	
	freqDomainPosition	0	0	0	
	freqDomainShift	0	0	0	
	freqHopping c-SRS	14 for test configuration 1,2 25 for test configuration 3	25	14	Matches $N_{RB,c}$
	freqHopping b-SRS	0	0	0	
	freqHopping b-hop	0	0	0	
	groupOrSequenceHopping	Neither	Neither	Neither	
	resourceType	Periodic	Periodic	Periodic	
	periodicityAndOffset-p	sl1, 0	sl640, 0	sl320, 0	Offset to align with DRx periodicity
	sequenceId	0	0	0	Any 10 bit number

Table A.6.4.1.1.1-4: Void

A.6.4.1.1.2 Test requirements

The test sequence shall be carried out in RRC_CONNECTED for every test case.

Following will be the test sequence for this test

1) Setup NR PCell according to parameters given in Table A.6.4.1.1.1-1.

2) After connection set up with the cell, the test equipment will verify that the timing of the NR cell is within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first detected path of DL SSB.

   a. The N_{TA} offset value (in T_c units) is 25600

   b. The T_e values depend on the DL and UL SCS for which the test is being run and are given in Table 7.1.2-1

3) The test system shall adjust the timing of the DL path by values given in Table A.6.4.1.1.2-1

Table A.6.4.1.1.2-1: Adjustment Value for DL Timing

SCS of SSB signals (KHz)	Adjustment Value	
	Test1	Test2
15	$+64*64T_c$	$+32*64T_c$
30	$+32*64T_c$	$+16*64T_c$

4) The test system shall verify that the adjustment step size and the adjustment rate shall be according to requirements specified in clause 7.1.2 Table 7.1.2.1-1 until the UE transmit timing offset is within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ respective to the first path (in time) of DL SSB used by the UE to determine downlink timing is received from the reference cell at the UE antenna. Skip this step for test 2 with DRX configured.

5) The test system shall verify that the UE transmit timing offset stays within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first path (in time) of DL SSB used by the UE to determine downlink timing is received from the reference cell at the UE antenna. For Test 2 the UE transmit timing offset shall be verified for the first transmission in the DRX cycle immediately after DL timing adjustment

A.6.4.2 UE timer accuracy

A.6.4.3 Timing advance

A.6.4.3.1 SA FR1 timing advance adjustment accuracy

A.6.4.3.1.1 Test Purpose and Environment

The purpose of the test is to verify UE Timing Advance adjustment delay and accuracy requirement defined in clause 7.3.

A.6.4.3.1.2 Test Parameters

Supported test configurations are shown in table A.6.4.3.1.2-1. Both timing advance adjustment delay and accuracy are tested by using the parameters in table A.6.4.3.1.2-2, A.6.4.3.1.2-3 and A.6.4.3.1.2-4.

In all test cases, single cell is used. Each test consists of two successive time periods, with time duration of T1 and T2 respectively. In each time period, timing advance commands are sent to the UE and Sounding Reference Signals (SRS), as specified in table A.6.4.3.1.2-3, are sent from the UE and received by the test equipment. By measuring the reception of the SRS, the transmit timing, and hence the timing advance adjustment accuracy, can be measured.

During time period T1, the test equipment shall send one message with a Timing Advance Command MAC Control Element, as specified in Clause 6.1.3.4 in TS 38.321 [7]. The Timing Advance Command value shall be set to 31, which according to Clause 4.2 in TS 38.213 [3] results in zero adjustment of the Timing Advance. In this way, a reference value for the timing advance used by the UE is established.

During time period T2, the test equipment shall send a sequence of messages with Timing Advance Command MAC Control Elements, with Timing Advance Command value specified in table A.6.4.3.1.2-2. This value shall result in

changes of the timing advance used by the UE, and the accuracy of the change shall then be measured, using the SRS sent from the UE.

As specified in Clause 7.3.2.1, the UE adjusts its uplink timing at slot n+k+1 for a timing advance command received in slot n. This delay must be taken into account when measuring the timing advance adjustment accuracy, via the SRS sent from the UE.

The UE Time Alignment Timer, described in Clause 5.2 in TS 38.321 [7], shall be configured so that it does not expire in the duration of the test.

Table A.6.4.3.1.2-1: Timing advance supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.4.3.1.2-2: General test parameters for timing advance

Parameter	Unit	Value	Comment
RF channel number		1	
Initial DL BWP		DLBWP.0.1	As specified in Table A.3.9.2.1-1
Dedicated DL BWP		DLBWP.1.1	As specified in Table A.3.9.2.2-1
Initial UL BWP		ULBWP.0.1	As specified in Table A.3.9.3.1-1
Dedicated UL BWP		ULBWP.1.1	As specified in Table A.3.9.3.2-1
Timing Advance Command (T_A) value during T1		31	$N_{TA_new} = N_{TA_old}$ for the purpose of establishing a reference value from which the timing advance adjustment accuracy can be measured during T2
Timing Advance Command (T_A) value during T2		39	For 15 kHz SCS $N_{TA_new} = N_{TA_old} + 8192*T_c$ For 30 kHz SCS $N_{TA_new} = N_{TA_old} + 4096*T_c$ (based on equation in clause 4.2 of TS 38.213 [3])
T1	s	5	
T2	s	5	

Table A.6.4.3.1.2-3: Cell specific test parameters for timing advance

Parameter		Unit	Test1	
			T1	T2
Duplex mode	Config 1		FDD	
	Config 2,3		TDD	
TDD configuration	Config 1		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52	
	Config 2		10: $N_{RB,c}$ = 52	
	Config 3		40: $N_{RB,c}$ = 106	
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52	
	Config 2		10: $N_{RB,c}$ = 52	
	Config 3		40: $N_{RB,c}$ = 106	
DRx Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	

	Config 2		SR.1.1 TDD
	Config 3		SR.2.1 TDD
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
TRS configuration	Config 1		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
OCNG Patterns			OCNG pattern 1
SMTC configuration	Config 1,2		SMTC.1 FR1
	Config 3		SMTC.2 FR1
SSB configuration	Config 1,2		SSB.1 FR1
	Config 3		SSB.2 FR1
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz
	Config 3		30 kHz
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15 kHz
	Config 3		30 kHz
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note2		dBm/15kHz	-98
N_{oc} Note2	Config 1,2	dBm/SCS	-98
	Config 3		-95
$\hat{E}_s / I_{ot}$		dB	3
$\hat{E}_s / N_{oc}$		dB	3
Io Note3	Config 1,2	dBm/ 9.36MHz	-67.57
	Config 3	dBm/ 38.16MHz	-62.58
Propagation condition		-	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.6.4.3.1.2-4: Sounding Reference Symbol Configuration for timing advance

Field		Value	Comment
c-SRS	Config 1,2	12	Frequency hopping is disabled
	Config 3	24	

b-SRS	0	
b-hop	0	
freqDomainPosition	0	Frequency domain position of SRS
freqDomainShift	0	
groupOrSequenceHopping	neither	No group or sequence hopping
SRS-PeriodicityAndOffset	sl5=2 for SCS 15kHz sl5=4 for SCS 30kHz	Once every 5 slots
pathlossReferenceRS	ssb-Index=0	SSB #0 is used for SRS path loss estimation
usage	Codebook	Codebook based UL transmission
startPosition	0	resourceMapping setting. SRS on last symbol of slot, and 1symbols for SRS without repetition.
nrofSymbols	n1	
repetitionFactor	n1	
combOffset-n2	0	transmissionComb setting
cyclicShift-n2	0	
nrofSRS-Ports	port1	Number of antenna ports used for SRS transmission
Note: For further information see clause 6.3.2 in TS 38.331 [2].		

A.6.4.3.1.3 Test Requirements

The UE shall apply the signalled Timing Advance value to the transmission timing at the designated activation time i.e. *k+1* slots after the reception of the timing advance command, where k=5.

The Timing Advance adjustment accuracy shall be within the limits specified in clause 7.3.2.2.

The rate of correct Timing Advance adjustments observed during repeated tests shall be at least 90%.

A.6.5 Signalling characteristics

A.6.5.1 Radio link Monitoring

In the following clause, any uplink signal transmitted by the UE is used for detecting the In-/Out-of-Sync state of the UE. In terms of measurement, the uplink signal is verified on the basis of the UE output power:

For intra-band contiguous carrier aggregation, transmit OFF power is measured as the mean power per component carrier.

For UE with multiple transmit antennas, transmit OFF power is measured as the mean power at each transmit connector.

- UE output power higher than Transmit OFF power -50 dBm (as defined in TS 38.101-1 [18]) means uplink signal
- UE output power equal to or less than Transmit OFF power -50 dBm (as defined in TS 38.101-1 [18]) means no uplink signal.

A.6.5.1.1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode

A.6.5.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell. This test will partly verify the FR1 radio link monitoring requirements in clause 8.1.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0, and *purpose* set to '*rlf*'. Supported test configurations are shown in table A.6.5.1.1.1-1. The test parameters are given in Tables A.6.5.1.1.1-2, A.6.5.1.1.1-3, and A.6.5.1.1.1-4 below. There is one cell (Cell 1), which is the active NR cell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.6.5.1.1.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. The UE is configured to perform inter-frequency measurements using Gap Pattern ID #0 (40ms) in test 1.

Table A.6.5.1.1.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
3	TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.6.5.1.1.1-2: General test parameters for FR1 out-of-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52
	Config 2		10: $N_{RB,c}$ = 52
	Config 3		40: $N_{RB,c}$ = 106
DL initial BWP configuration	Config 1, 2, 3		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3		ULBWP.1.1
TDD Configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.1.3 FDD
	Config 2		CCR.1.3 TDD
	Config 3		CCR.2.2 TDD

SSB Configuration	Config 1		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTC Configuration	Config 1, 2		SMTC.1
	Config 3		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 kHz
	Config 3		30 kHz
PRACH Configuration	Config 1, 2		Table A.3.8.2.1-1
	Config 3		Table A.3.8.2.1-1
SSB index assigned as RLM RS			0
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			*OFF*
Gap pattern ID			*gp0*
Layer 3 filtering			*Enabled*
T310 timer		ms	*0*
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
T1		s	0.2
T2		s	0.48
T3		s	0.48
D1		s	0.44
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.6.5.1.1.1-3: Cell specific test parameters for FR1 (Cell 1) for out-of-sync radio link monitoring tests in non-DRX mode

Parameter		Unit	Test 1		
			T1	T2	T3
EPRE ratio of PDCCH DMRS to SSS		dB	4		
EPRE ratio of PDCCH to PDCCH DMRS		dB	0		
EPRE ratio of PBCH DMRS to SSS		dB	0		
EPRE ratio of PBCH to PBCH DMRS		dB			
EPRE ratio of PSS to SSS		dB			
EPRE ratio of PDSCH DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1	dB	1	-7	-15
	Config 2		1	-7	-15
	Config 3		1	-7	-15
N_{oc}	Config 1	dBm/ 15kHz	-98		
	Config 2		-98		
	Config 3		-98		
N_{oc}	Config 1	dBm/ SCS	-98		
	Config 2		-98		
	Config 3		-95		
Propagation condition			TDL-C 300ns 100Hz		

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 4: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in Figure A.6.5.1.1.1-1.
Note 5: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6.

Table A.6.5.1.1.1-4: Measurement gap configuration for out-of-sync tests in non-DRX mode

Field	Test 1
	Value
gapOffset	0

Note: Ensure that RLM RS is partially overlapped with measurement gap

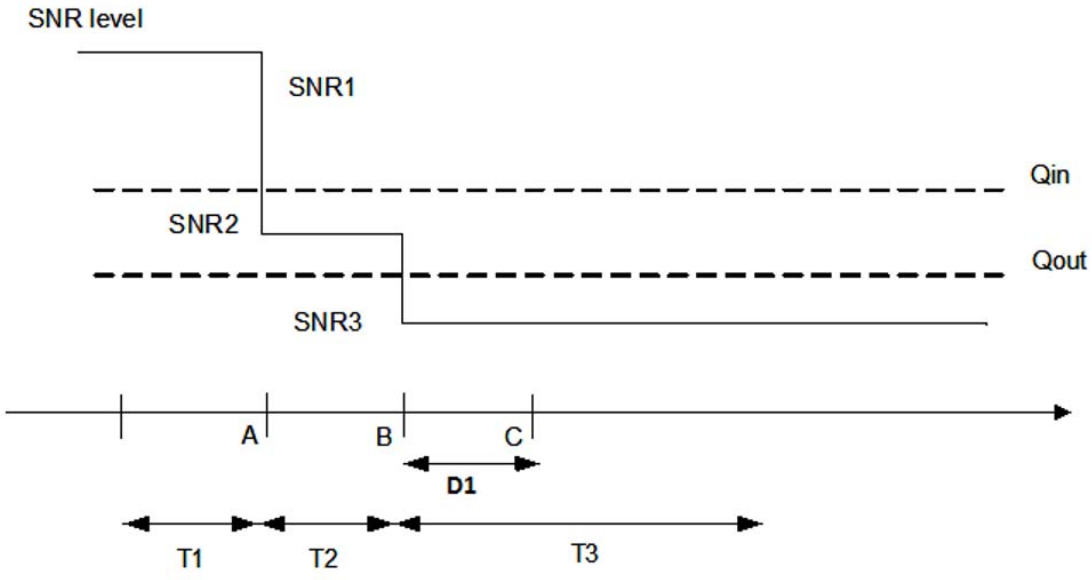

Figure A.6.5.1.1.1-1: SNR variation for out-of-sync testing

A.6.5.1.1.2 Test Requirements

The UE behaviour in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.1.2 Radio Link Monitoring In-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode

A.6.5.1.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell. This test will partly verify the FR1 radio link monitoring requirements in clause 8.1.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0, and *purpose* set to '*rlf*'. Supported test configurations are shown in table A.6.5.1.2.1-1. The test parameters are given in Tables A.6.5.1.2.1-2, and A.6.5.1.2.1-3 below. There is one cell (Cell 1), which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.6.5.1.2.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms.

Table A.6.5.1.2.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
3	TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.6.5.1.2.1-2: General test parameters for FR1 in-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52
	Config 2		10: $N_{RB,c}$ = 52
	Config 3		40: $N_{RB,c}$ = 106
DL initial BWP configuration	Config 1, 2, 3		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3		ULBWP.1.1
TDD Configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
SSB Configuration	Config 1		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTC Configuration	Config 1, 2		SMTC.1
	Config 3		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 kHz
	Config 3		30 kHz
PRACH Configuration	Config 1, 2		Table A.3.8.2.1-1
	Config 3		Table A.3.8.2.1-1
SSB index assigned as RLM RS			0
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low

In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			*OFF*
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*
T310 timer		ms	1000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1, 4		TRS.1.1 FDD
	Config 2, 5		TRS.1.1 TDD
	Config 3, 6		TRS.1.2 TDD
T1		s	0.2
T2		s	0.2
T3		s	0.24
T4		s	0.2
T5		s	0.88
D1		s	0.84
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.6.5.1.2.1-3: Cell specific test parameters for FR1 (Cell 1) for in-sync radio link monitoring tests in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0				
EPRE ratio of PBCH DMRS to SSS		dB	0				
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1	dB	1	-7	-15	-4.5	1
	Config 2		1	-7	-15	-4.5	1
	Config 3		1	-7	-15	-4.5	1
N_{oc}	Config 1	dBm/ 15 kHz	-98				
	Config 2		-98				
	Config 3		-98				
N_{oc}	Config 1	dBm/ SCS	-98				
	Config 2		-98				
	Config 3		-95				
Propagation condition			TDL-C 300ns 100Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 4: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in Figure A.6.5.1.2.1-1.
Note 5: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 and T4 is modified as specified in clause A.3.6.

Table A.6.5.1.2.1-4: Void

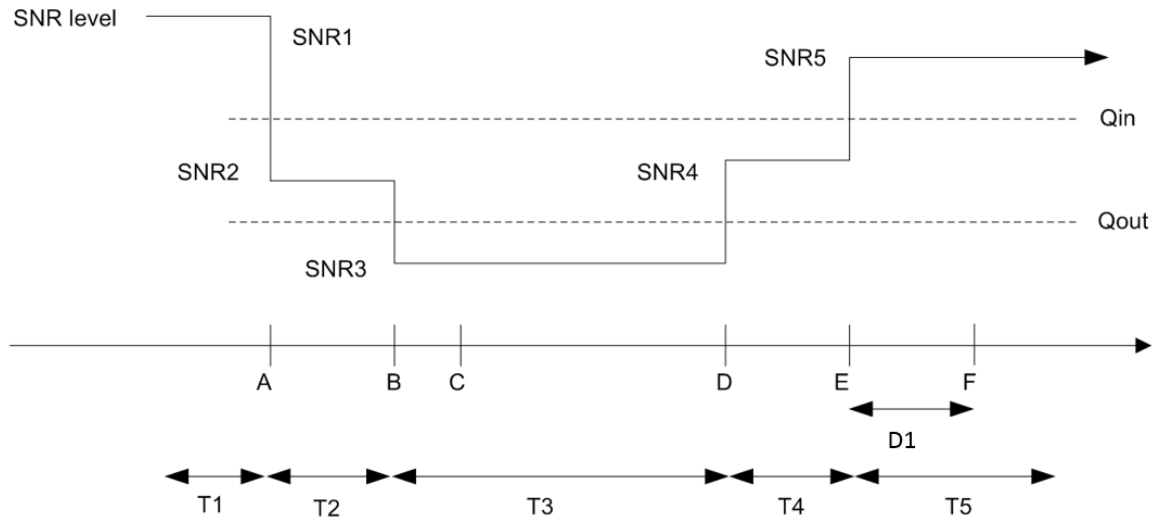

Figure A.6.5.1.2.1-1: SNR variation for in-sync testing

A.6.5.1.2.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.1.3 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode

A.6.5.1.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell when DRX is used. This test will partly verify the FR1 radio link monitoring requirements in clause 8.1.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0, and *purpose* set to '*rlf*'. Supported test configurations are shown in table A.6.5.1.3.1-1. The test parameters are given in Tables A.6.5.1.3.1-2, and A.6.5.1.3.1-3. There is one cell (Cell 1), which is the active NR cell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.6.5.1.3.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

Table A.6.5.1.3.1-1: Supported test configurations for FR1 PCell

Configuration	Description

1	FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
3	TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.6.5.1.3.1-2: General test parameters for FR1 out-of-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52
	Config 2		10: $N_{RB,c}$ = 52
	Config 3		40: $N_{RB,c}$ = 106
DL initial BWP configuration	Config 1, 2, 3		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3		ULBWP.1.1
TDD Configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.1.3 FDD
	Config 2		CCR.1.3 TDD
	Config 3		CCR.2.2 TDD
SSB Configuration	Config 1		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTC Configuration	Config 1, 2		SMTC.1
	Config 3		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 kHz
	Config 3		30 kHz
PRACH Configuration	Config 1, 2		Table A.3.8.2.1-1
	Config 3		Table A.3.8.2.1-1
SSB index assigned as RLM RS			0
OCNG parameters			OP.1

CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX Configuration			DRX.3
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*
T310 timer		ms	*0*
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
T1		s	0.2
T2		s	0.68
T3		s	0.68
D1		s	0.64
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.6.5.1.3.1-3: Cell specific test parameters for FR1 (Cell 1) for out-of-sync radio link monitoring tests in DRX mode

Parameter	Unit	Test 1		
		T1	T2	T3
EPRE ratio of PDCCH DMRS to SSS	dB	4		
EPRE ratio of PDCCH to PDCCH DMRS	dB	0		
EPRE ratio of PBCH DMRS to SSS	dB	0		
EPRE ratio of PBCH to PBCH DMRS	dB			
EPRE ratio of PSS to SSS	dB			
EPRE ratio of PDSCH DMRS to SSS	dB			
EPRE ratio of PDSCH to PDSCH DMRS	dB			

EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1	dB	1	-7	-15
	Config 2		1	-7	-15
	Config 3		1	-7	-15
N_{oc}	Config 1	dBm/15 kHz	-98		
	Config 2		-98		
	Config 3		-98		
N_{oc}	Config 1	dBm/SCS	-98		
	Config 2		-98		
	Config 3		-95		
Propagation condition			TDL-C 300ns 100Hz		

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 4: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in Figure A.6.5.1.3.1-1.
Note 5: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6.

Table A.6.5.1.3.1-4: Void

Table A.6.5.1.3.1-5: Void

Table A.6.5.1.3.1-6: Void

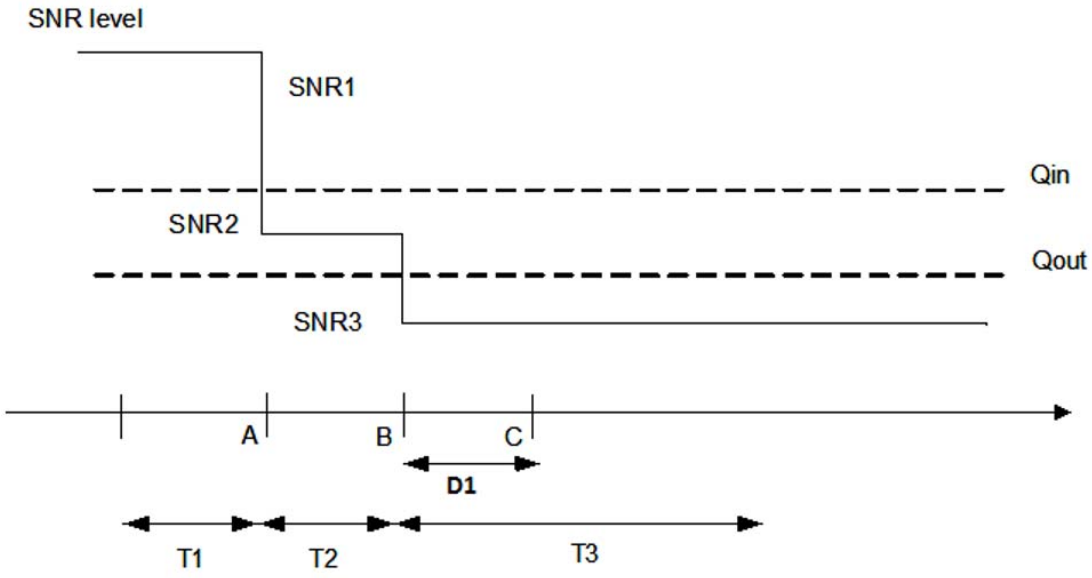

Figure A.6.5.1.3.1-1: SNR variation for out-of-sync testing

A.6.5.1.3.2 Test Requirements

The UE behaviour in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.1.4 Radio Link Monitoring In-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode

A.6.5.1.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell when DRX is used. This test will partly verify the FR1 radio link monitoring requirements in clause 8.1.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0, and *purpose* set to '*rlf*'. Supported test configurations are shown in table A.6.5.1.4.1-1. The test parameters are given in Tables A.6.5.1.4.1-2, and A.6.5.1.4.1-3. There is one cell (Cell 1), which is the active NR cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.6.5.1.4.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

Table A.6.5.1.4.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
3	TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.6.5.1.4.1-2: General test parameters for FR1 in-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52
	Config 2		10: $N_{RB,c}$ = 52
	Config 3		40: $N_{RB,c}$ = 106
DL initial BWP configuration	Config 1, 2, 3		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3		ULBWP.1.1

TDD Configuration		Config 1		Not Applicable
		Config 2		TDDConf.1.1
		Config 3		TDDConf.2.1
RMSI CORESET Reference Channel		Config 1		CR.1.1 FDD
		Config 2		CR.1.1 TDD
		Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel		Config 1		CCR.1.1 FDD
		Config 2		CCR.1.1 TDD
		Config 3		CCR.2.1 TDD
SSB Configuration		Config 1		SSB.1 FR1
		Config 2		SSB.1 FR1
		Config 3		SSB.2 FR1
SMTC Configuration		Config 1, 2		SMTC.1
		Config 3		SMTC.1
PDSCH/PDCCH subcarrier spacing		Config 1, 2		15 kHz
		Config 3		30 kHz
PRACH Configuration		Config 1, 2		Table A.3.8.2.1-1
		Config 3		Table A.3.8.2.1-1
SSB index assigned as RLM RS				0
OCNG parameters				OP.1
CP length				Normal
Correlation Matrix and Antenna Configuration				2x2 Low
In sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	4
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	0
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
Out of sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	4
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
DRX Configuration				DRX.3
Gap pattern ID				N.A.
Layer 3 filtering				*Enabled*
T310 timer			ms	2000
T311 timer			ms	1000
N310				1
N311				1

CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
T1		s	0.2
T2		s	0.2
T3		s	0.64
T4		s	0.2
T5		s	0.88
D1		s	0.84
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.6.5.1.4.1-3: Cell specific test parameters for FR1 (Cell 1) for in-sync radio link monitoring tests in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0				
EPRE ratio of PBCH DMRS to SSS		dB	0				
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1	dB	1	-7	-15	-4.5	1
	Config 2		1	-7	-15	-4.5	1
	Config 3		1	-7	-15	-4.5	1
N_{oc}	Config 1	dBm/15 kHz	-98				
	Config 2		-98				
	Config 3		-98				
N_{oc}	Config 1	dBm/SCS	-98				
	Config 2		-98				
	Config 3		-95				
Propagation condition			TDL-C 300ns 100Hz				
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG. Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs. Note 4: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in Figure A.6.5.1.4.1-1. Note 5: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 and T4 is modified as specified in clause A.3.6.								

Table A.6.5.1.4.1-4: Void

Table A.6.5.1.4.1-5: Void

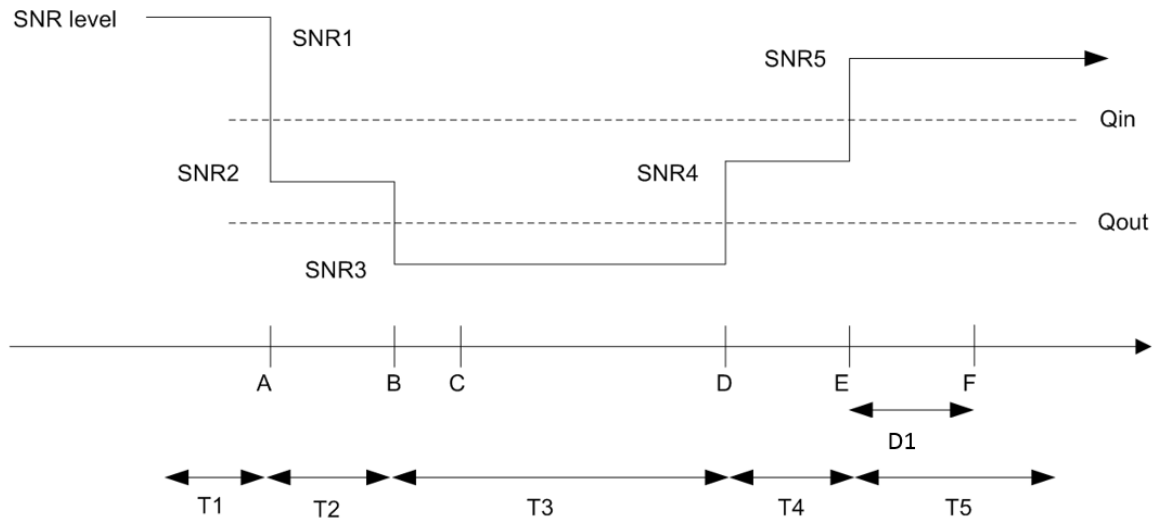

Figure A.6.5.1.4.1-1: SNR variation for in-sync testing.

A.6.5.1.4.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.1.5 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode

A.6.5.1.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when no DRX is used. This test will partly verify the FR1 PCell CSI-RS Out-of-sync radio link monitoring requirements in clause 8.1.

The test parameters are given in Tables A.6.5.1.5.1-1, A.6.5.1.5.1-2, A.6.5.1.5.1-3, and A.6.5.1.5.1-3A below. There is one cell, cell 1 which is the PCell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.6.5.1.5.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting of 5ms. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test. In the test, SSB0 is configured as the BFD-RS.

Table A.6.5.1.5.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30 kHz SSB SCS, 40 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.6.5.1.5.1-2: General test parameters for FR1 PCell for CSI-RS out-of-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
TDD Configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
DL initial BWP configuration	Config 1, 2, 3		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.1.3 FDD
	Config 2		CCR.1.3 TDD
	Config 3		CCR.2.2 TDD
SSB Configuration	Config 1		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTC Configuration	Config 1, 2		SMTC.1
	Config 3		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 kHz
	Config 3		30 kHz
TRS configuration	Config 1		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
CSI-RS for RLM	Config 1		Resource #4 in TRS.1.1 FDD
	Config 2		Resource #4 in TRS.1.1 TDD
	Config 3		Resource #4 in TRS.1.2 TDD
TCI configuration for PDCCH/PDSCH			TCI.State. 2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low

Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			*OFF*
Gap pattern ID			*gp0*
Layer 3 filtering			*Enabled*
T310 timer		ms	*0*
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
T1		s	0.2
T2		s	0.48
T3		s	0.48
D1		s	0.44
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.6.5.1.5.1-3: Cell specific test parameters for FR1 for CSI-RS out-of-sync radio link monitoring in non-DRX mode

Parameter		Unit	Test 1		
			T1	T2	T3
EPRE ratio of PDCCH DMRS to SSSPDCCH_beta		dB	4		
EPRE ratio of PDCCH to PDCCH DMRSPDCCH_DMRS_beta		dB			
EPRE ratio of PBCH DMRS to SSSPBCH_beta		dB	0		
EPRE ratio of PBCH to PBCH DMRSPSS_beta		dB			
EPRE ratio of PSS to SSSSSS_beta		dB			
EPRE ratio of PDSCH DMRS to SSS PDSCH_beta		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1	dB	1	-7	-15
	Config 2		1	-7	-15
	Config 3		1	-7	-15

N_{oc}	Config 1	dBm/15kHz	-98
	Config 2		-98
	Config 3		-98
Propagation condition			TDL-C 300ns 100Hz

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.6.5.1.5.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is [A.3.6].

Table A.6.5.1.5.1-3A: Measurement gap configuration for FR1 CSI-RS out-of-sync radio link monitoring in non-DRX mode

Field	Test 1 Value
gapOffset	0
Note 1: Void	

Table A.6.5.1.5.1-4: Void

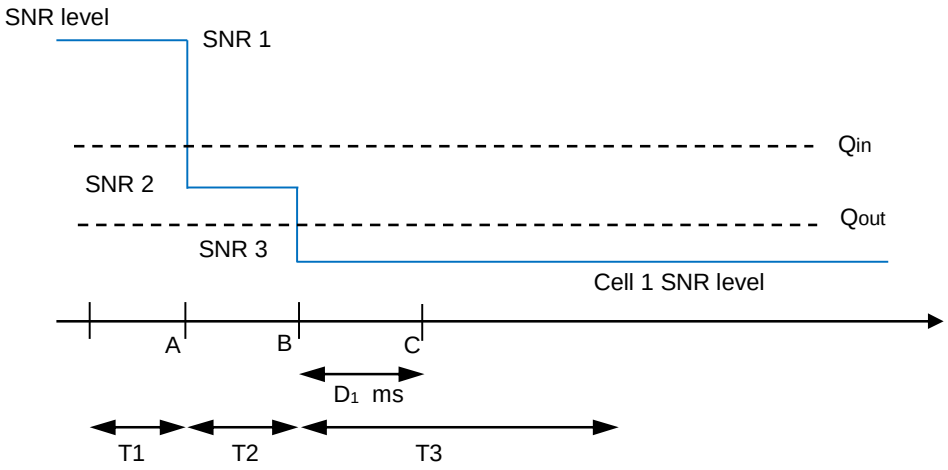

Figure A.6.5.1.5.1-1: SNR variation for CSI-RS out-of-sync testing

A.6.5.1.5.2 Test Requirements

The UE behaviour during time durations T1, T2, and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

The UE shall stop transmitting uplink signal in Cell 1 no later than time point C (D_1 ms after the start of the time duration T3) on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.1.6 Radio Link Monitoring In-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode

A.6.5.1.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when no DRX is used. This test will partly verify the FR1 PCell CSI-RS In-sync radio link monitoring requirements in clause 8.1.

The test parameters are given in Tables A.6.5.1.6.1-1, A.6.5.1.6.1-2, and A.6.5.1.6.1-3 below. There is one cells, cell 1which is the PCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.6.5.1.6.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. In the test, DRX configuration is not enabled. In the test, SSB0 is configured as the BFD-RS.

Table A.6.5.1.6.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30kHz SSB SCS, 40 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.6.5.1.6.1-2: General test parameters for FR1 PCell for CSI-RS in-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
TDD Configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
DL initial BWP configuration	Config 1, 2, 3		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD

SSB Configuration	Config 1		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTC Configuration	Config 1, 2		SMTC.1
	Config 3		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 kHz
	Config 3		30 kHz
TRS configuration	Config 1		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
CSI-RS for RLM	Config 1		Resource #4 in TRS.1.1 FDD
	Config 2		Resource #4 in TRS.1.1 TDD
	Config 3		Resource #4 in TRS.1.2 TDD
TCI configuration for PDCCH/PDSCH			TCI.State. 2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			*OFF*
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*
T310 timer		ms	1000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
T1		s	0.2

T2	s	0.2
T3	s	0.44
T4	s	0.2
T5	s	0.88
T6	S	0.84
Note 1: UE-specific PDCCH is not transmitted after T1 starts.		

Table A.6.5.1.6.1-3: Cell specific test parameters for FR1 for CSI-RS in-sync radio link monitoring in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSSPDCCH_beta		dB	4				
EPRE ratio of PDCCH to PDCCH DMRSPDCCH_DMRS_beta		dB					
EPRE ratio of PBCH DMRS to SSSPBCH_beta		dB	0				
EPRE ratio of PBCH to PBCH DMRSPSS_beta		dB					
EPRE ratio of PSS to SSSSSS_beta		dB					
EPRE ratio of PDSCH DMRS to SSS PDSCH_beta		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1	dB	1	-7	-15	-4.5	1
	Config 2		1	-7	-15	-4.5	1
	Config 3		1	-7	-15	-4.5	1
N_{oc}	Config 1	dBm/15kHz	-98				
	Config 2		-98				
	Config 3		-98				
Propagation condition			TDL-C 300ns 100Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure A.6.5.1.6.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is specified in clause A.3.6.1.1.

Table A.6.5.1.6.1-4: Void

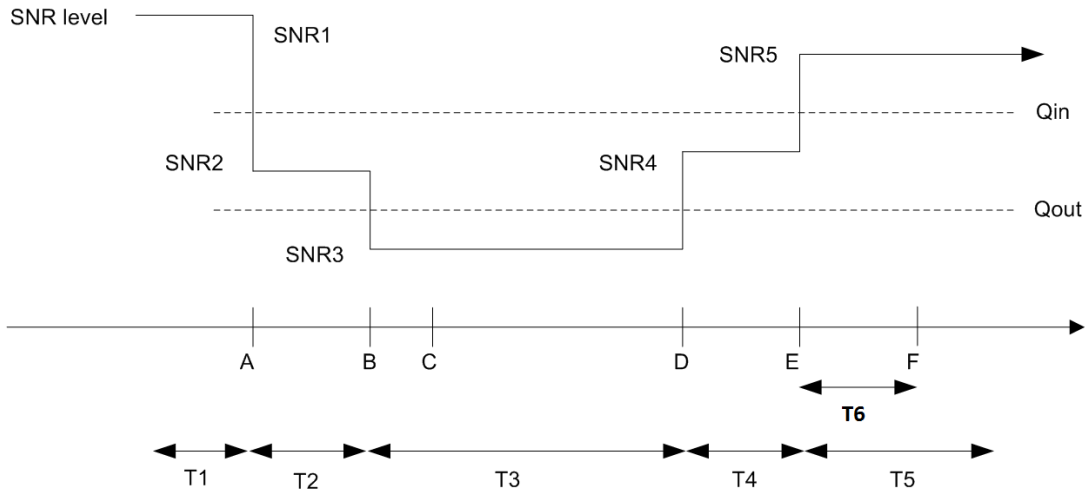

Figure A.6.5.1.6.1-1: SNR variation for CSI-RS in-sync testing

A.6.5.1.6.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (T6 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.1.7 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in DRX mode

A.6.5.1.7.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when DRX is used. This test will partly verify the FR1 PCell CSI-RS Out-of-sync radio link monitoring requirements in clause 8.1.

The test parameters are given in Tables A.6.5.1.7.1-1, A.6.5.1.7.1-2, and A.6.5.1.7.1-3 below. There is one cell, cell 1 is the PCell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.6.5.1.7.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test. In the test, SSB0 is configured as the BFD-RS.

Table A.6.5.1.7.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30 kHz SSB SCS, 40 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.6.5.1.7.1-2: General test parameters for FR1 PCell for CSI-RS out-of-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
TDD Configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
DL initial BWP configuration	Config 1, 2, 3		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.1.3 FDD
	Config 2		CCR.1.3 TDD
	Config 3		CCR.2.2 TDD
SSB Configuration	Config 1		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTC Configuration	Config 1, 2		SMTC.1
	Config 3		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 kHz
	Config 3		30 kHz
TRS configuration	Config 1		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
CSI-RS for RLM	Config 1		Resource #4 in TRS.1.1 FDD
	Config 2		Resource #4 in TRS.1.1 TDD
	Config 3		Resource #4 in TRS.1.2 TDD
TCI configuration for PDCCH/PDSCH			TCI.State. 2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size

	REG bundle size		6
DRX			DRX.3
Gap pattern ID			N.A.
Layer 3 filtering			Enabled
T310 timer		ms	0
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
T1		s	0.2
T2		s	1.28
T3		s	1.28
D1		s	1.24
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.6.5.1.7.1-3: Cell specific test parameters for FR1 for CSI-RS out-of-sync radio link monitoring in DRX mode

Parameter		Unit	Test 1		
			T1	T2	T3
EPRE ratio of PDCCH DMRS to SSSPDCCH_beta		dB	4		
EPRE ratio of PDCCH to PDCCH DMRSPDCCH_DMRS_beta		dB	4		
EPRE ratio of PBCH DMRS to SSSPBCH_beta		dB	0		
EPRE ratio of PBCH to PBCH DMRSPSS_beta		dB			
EPRE ratio of PSS to SSSSSS_beta		dB			
EPRE ratio of PDSCH DMRS to SSS PDSCH_beta		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1	dB	1	-7	-15
	Config 2		1	-7	-15
	Config 3		1	-7	-15
N_{oc}	Config 1	dBm/15kHz	-98		
	Config 2		-98		
	Config 3		-98		
Propagation condition			TDL-C 300ns 100Hz		

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8:	The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.6.5.1.7.1-1.
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is specified in clause A.3.6.1.1.

Table A.6.5.1.7.1-4: Void

Table A.6.5.1.7.1-5: Void

Table A.6.5.1.7.1-6: Void

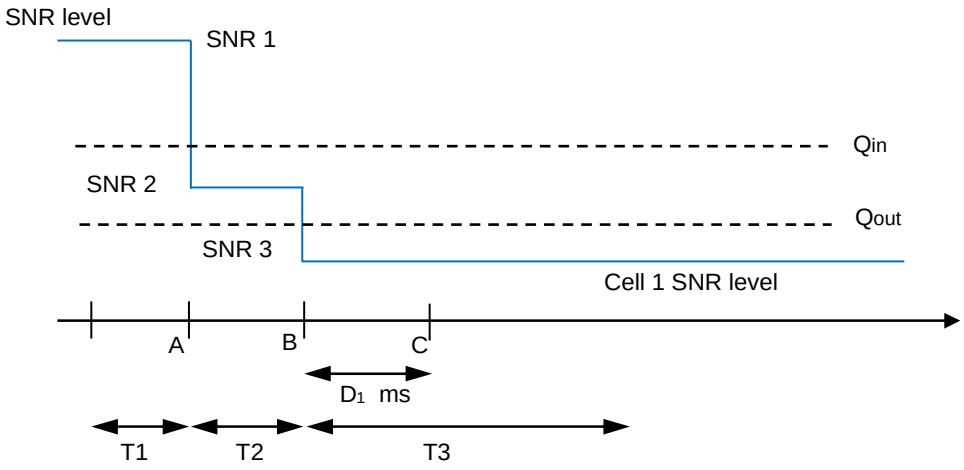

Figure A.6.5.1.7.1-1: SNR variation for CSI-RS out-of-sync testing

A.6.5.1.7.2 Test Requirements

The UE behaviour during time durations T1, T2, and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 (PCell) at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

The UE shall stop transmitting uplink signal in Cell 1 (PCell) no later than time point C (D_1 ms after the start of the time duration T3) on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.1.8 Radio Link Monitoring In-sync Test for FR1 PCell configured with CSI-RS-based RLM in DRX mode

A.6.5.1.8.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when DRX is used. This test will partly verify the FR1 PCell CSI-RS In-sync radio link monitoring requirements in clause 8.1.

The test parameters are given in Tables A.6.5.1.8.1-1, A.6.5.1.81-2, A.6.5.1.8.1-3 and A.6.5.1.8.1-3A below. There is one cells, cell 1which is the PCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.6.5.1.8.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test. In the test, SSB0 is configured as the BFD-RS.

Table A.6.5.1.8.1-1: Supported test configurations for FR1 PSCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30kHz SSB SCS, 40 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.6.5.1.8.1-2: General test parameters for FR1 PCell for CSI-RS in-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
TDD Configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
DL initial BWP configuration	Config 1, 2, 3		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
SSB Configuration	Config 1		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTC Configuration	Config 1, 2		SMTC.1

	Config 3		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 kHz
	Config 3		30 kHz
TRS configuration	Config 1		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
CSI-RS for RLM	Config 1		Resource #4 in TRS.1.1 FDD
	Config 2		Resource #4 in TRS.1.1 TDD
	Config 3		Resource #4 in TRS.1.2 TDD
TCI configuration for PDCCH/PDSCH			TCI.State. 2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			DRX.3
Gap pattern ID			gp0
Layer 3 filtering			Enabled
T310 timer		ms	4000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
T1		s	0.2
T2		s	0.2
T3		s	1.24
T4		s	0.2
T5		s	4

T6	s	3.88
Note 1: UE-specific PDCCH is not transmitted after T1 starts.		

Table A.6.5.1.8.1-3: Cell specific test parameters for FR1 for CSI-RS in-sync radio link monitoring in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSSPDCCH_beta		dB	4				
EPRE ratio of PDCCH to PDCCH DMRSPDCCH_DMRS_beta		dB					
EPRE ratio of PBCH DMRS to SSSPBCH_beta		dB	0				
EPRE ratio of PBCH to PBCH DMRSPSS_beta		dB					
EPRE ratio of PSS to SSSSSS_beta		dB					
EPRE ratio of PDSCH DMRS to SSS PDSCH_beta		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1	dB	1	-7	-15	-4.5	1
	Config 2		1	-7	-15	-4.5	1
	Config 3		1	-7	-15	-4.5	1
N_{oc}	Config 1	dBm/15kHz	-98				
	Config 2		-98				
	Config 3		-98				
Propagation condition			TDL-C 300ns 100Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure A.6.5.1.8.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is specified in clause A.3.6.1.1.

Table A.6.5.1.8.1-3A: Measurement gap configuration for FR1 CSI-RS in-sync radio link monitoring in non-DRX mode

Field	Test 1
	Value
gapOffset	0
Note 1: Void	

Table A.6.5.1.8.1-4: Void

Table A.6.5.1.8.1-5: Void

Table A.6.5.1.8.1-6: Void

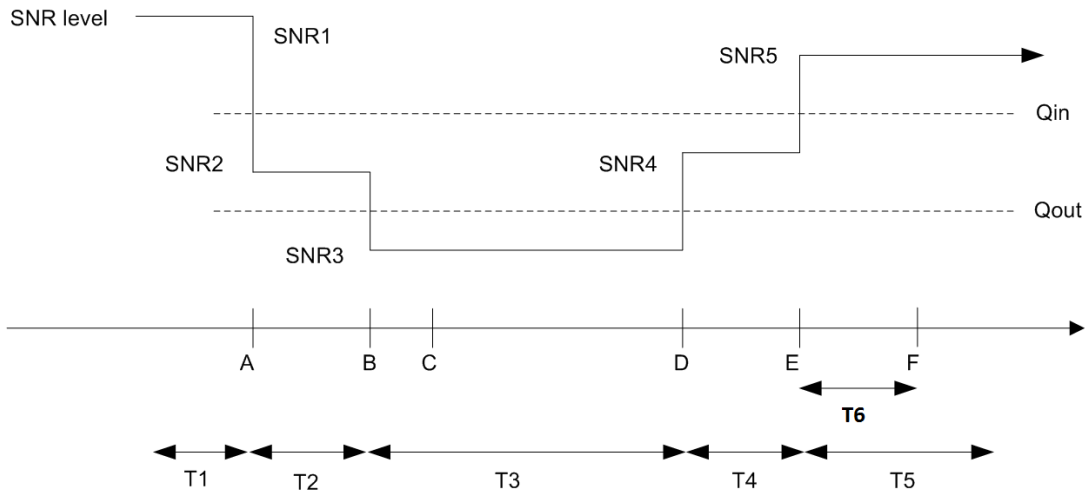

Figure A.6.5.1.8.1-1: SNR variation for CSI-RS in-sync testing

A.6.5.1.8.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (T6 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.1.9 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM for UE fulfilling relaxed measurement criterion

A.6.5.1.9.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when DRX is used. This test will partly verify the FR1 PCell CSI-RS Out-of-sync radio link monitoring requirements in clause 8.1.3.4 for UE fulfilling good serving cell quality criterion.

The test parameters are given in Tables A.6.5.1.9.1-1, A.6.5.1.9.1-2, and A.6.5.1.9.1-3 below. There is one cell, cell 1 is the PCell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.6.5.1.9.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic

CQI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test. In the test, SSB0 is configured as the BFD-RS.

Table A.6.5.1.9.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30 kHz SSB SCS, 40 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.6.5.1.9.1-2: General test parameters for FR1 PCell for CSI-RS out-of-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
TDD Configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
DL initial BWP configuration	Config 1, 2, 3		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.1.3 FDD
	Config 2		CCR.1.3 TDD
	Config 3		CCR.2.2 TDD
SSB Configuration	Config 1		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTC Configuration	Config 1, 2		SMTC.1
	Config 3		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 kHz
	Config 3		30 kHz
TRS configuration	Config 1		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
CSI-RS for RLM	Config 1		Resource #4 in TRS.1.1 FDD
	Config 2		Resource #4 in TRS.1.1 TDD
	Config 3		Resource #4 in TRS.1.2 TDD
TCI configuration for PDCCH/PDSCH			TCI.State. 2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low

Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			[DRX.X1]
Gap pattern ID			N.A.
Layer 3 filtering			Enabled
T310 timer		ms	0
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
T1		s	0.2
T2		s	2.48
T3		s	4.88
D1		s	4.84
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.6.5.1.9.1-3: Cell specific test parameters for FR1 for CSI-RS out-of-sync radio link monitoring in DRX mode

Parameter		Unit	Test 1		
			T1	T2	T3
EPRE ratio of PDCCH DMRS to SSSPDCCH_beta		dB	4		
EPRE ratio of PDCCH to PDCCH DMRSPDCCH_DMRS_beta		dB	4		
EPRE ratio of PBCH DMRS to SSSPBCH_beta		dB	0		
EPRE ratio of PBCH to PBCH DMRSPSS_beta		dB			
EPRE ratio of PSS to SSSSSS_beta		dB			
EPRE ratio of PDSCH DMRS to SSS PDSCH_beta		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1	dB	1	1	-15
	Config 2		1	1	-15
	Config 3		1	1	-15

N_{oc}	Config 1	dBm/15kHz	-98
	Config 2		-98
	Config 3		-98
goodServingCellEvaluationRLM			configured
offset in goodServingCellEvaluationRLM		dB	Not configured
Propagation condition			TDL-C 300ns 100Hz
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.			
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.			
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.			
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.			
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.			
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.			
Note 8: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.6.5.1.7.1-1.			
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is specified in clause A.3.6.1.1.			

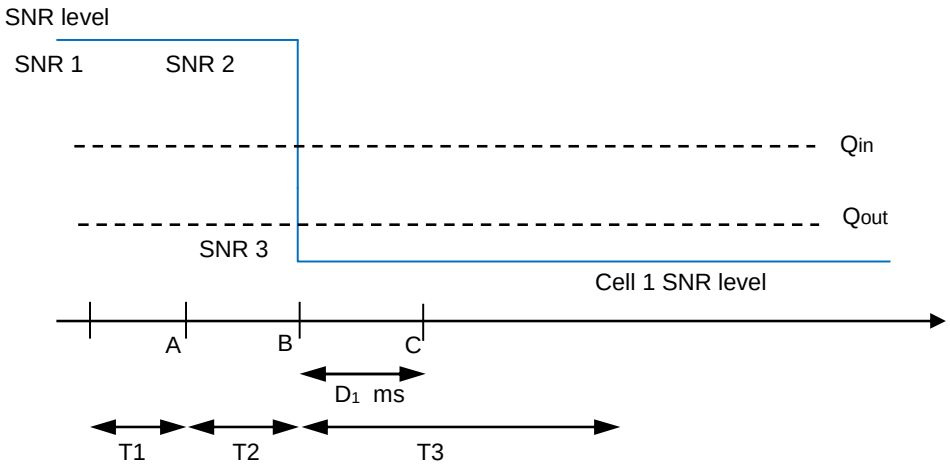

Figure A.6.5.1.9.1-1: SNR variation for CSI-RS out-of-sync testing

A.6.5.1.9.2 Test Requirements

The UE behaviour during time durations T1, T2, and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 (PCell) at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

The UE shall stop transmitting uplink signal in Cell 1 (PCell) no later than time point C (D_1 ms after the start of the time duration T3) on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.2 Interruption

A.6.5.2.1 Interruptions during measurements on deactivated NR SCC in FR1

A.6.5.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE missed ACK/NACK rate does not exceed the limits at NR PSCell interruptions during the measurement on the deactivated NR SCC. This test will verify the missed ACK/NACK rate for PCell in standalone NR specified in clause 8.2.2.2. Supported test configurations for NR PCell are shown in table A.6.5.2.1.1-1. Supported test configurations for NR SCell are shown in table A.6.5.2.1.1-1A. Test configuration for NR PCell and test configuration for NR SCell are chosen independently.

The general test parameters and NR cell specific test parameters are given in Table A.6.5.2.1.1-2, A.6.5.2.1.1-3 and A.6.5.2.1.1-4 below. In the test there are two cells: Cell1 and Cell2. Cell1 is PCell, Cell2 is an NR deactivated SCell. Cell1 shall be configured as PCell and Cell2 shall be configured as SCell.

The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, the UE is connected to Cell1 and Cell2 and the RRC message including *measCycleSCell* or *allowInterruptions* for the deactivated NR SCells is received at the UE antenna connector. During T1, PCell is continuously scheduled in DL.

Table A.6.5.2.1.1-1: Interruptions during measurements on deactivated NR SCC supported test configurations for NR PCell

Config	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration,	

Table A.6.5.2.1.1-1A: Interruptions during measurements on deactivated NR SCC supported test configurations for NR SCell

$Config_{SCell}$	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration,	

Table A.6.5.2.1.1-2: General test parameters for interruptions during measurements on deactivated NR SCC in standalone NR

Parameter	Unit	Value	Comment
RF Channel Number		1, 2	Two NR RF channels
Active PCell		Cell1	PCell on NR RF channel number 1.
Configured deactivated SCell		Cell2	Deactivated SCell on NR RF channel number 2.
CP length		Normal	Applicable to Cell1 and Cell2
DRX		OFF	
Measurement gap pattern Id		OFF	

SCell measurement cycle (measCycleSCell)	ms	640	
T1	s	10	

Table A.6.5.2.1.1-3: NR cell specific test parameters for NR PCell for interruptions during measurements on deactivated NR SCC in standalone NR

Parameter		Unit	Cell1
Frequency Range			FR1
Duplex mode	Config 1		FDD
	Config 2,3		TDD
TDD configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
$BW_{channel}$	Config 1,2		Note 9
	Config 3		Note 9
$BW_{occupied}$	Config 1,2	RB	52 Note 7
	Config 3		106 Note 8
Initial DL BWP Configuration	Config 1,2,3		DLBWP.0.1
Dedicated DL BWP Configuration	Config 1,2,3		DLBWP.1.1
Initial UL BWP Configuration	Config 1,2,3		ULBWP.0.1
Dedicated UL BWP Configuration	Config 1,2,3		ULBWP.1.1
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD
	Config 2		SR.1.2 TDD
	Config 3		SR.2.1 TDD
CSI-RS for tracking	Config 1		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
RMSI CORESET parameters	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET parameters	Config 1		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
OCNG Patterns	Config 1,2		OP.1 Note 7
	Config 3		OP.1 Note 8
SMTC Configuration			SMTC.1
SSB Configuration	Config 1,2		SSB.1 FR1
	Config 3		SSB.2 FR1
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} Note 2		dBm/15 kHz	-104
SS-RSRP Note 3		dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17

N_{oc} Note 2	Config 1,2	dBm/SCS	-104
	Config 3		-101
Io Note3	Config 1,2	dBm/9.36MHz	-58.96
	Config 3	dBm/38.16MHz	-52.86
Time offset to Cell1 Note 5		µs	-
Propagation Condition			AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modeled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselvess.
Note 4: Void
Note 5: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.
Note 6: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2 defined in clause 12 of TS 38.213 [3].
Note 7: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 8: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 9: $N_{RB,c}$. is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.

Table A.6.5.2.1.1-4: NR cell specific test parameters for NR SCell for interruptions during measurements on deactivated NR SCC in standalone NR

Parameter		Unit	Cell2
Frequency Range			FR1
Duplex mode	$Config_{SCell}$ 1		FDD
	$Config_{SCell}$ 2,3		TDD
TDD configuration	$Config_{SCell}$ 1		Not Applicable
	$Config_{SCell}$ 2		TDDConf.1.1
	$Config_{SCell}$ 3		TDDConf.2.1
$BW_{channel}$	$Config_{SCell}$ 1,2		Note 9
	$Config_{SCell}$ 3		Note 9
$BW_{occupied}$	$Config_{SCell}$ 1,2	RB	52 Note 7
	$Config_{SCell}$ 3		106 Note 8
Initial DL BWP Configuration	$Config_{SCell}$ 1,2,3		DLBWP.0.1
Dedicated DL BWP Configuration	$Config_{SCell}$ 1,2,3		DLBWP.1.1
Initial UL BWP Configuration	$Config_{SCell}$ 1,2,3		N/A
Dedicated UL BWP Configuration	Config 1,2,3		N/A
PDSCH Reference measurement channel	$Config_{SCell}$ 1		SR.1.1 FDD
	$Config_{SCell}$ 2		SR.1.2 TDD
	$Config_{SCell}$ 3		SR.2.1 TDD
CSI-RS for tracking	$Config_{SCell}$ 1		TRS.1.1 FDD
	$Config_{SCell}$ 2		TRS.1.1 TDD
	$Config_{SCell}$ 3		TRS.1.2 TDD
RMSI CORESET parameters	$Config_{SCell}$ 1		CR.1.1 FDD
	$Config_{SCell}$ 2		CR.1.1 TDD
	$Config_{SCell}$ 3		CR.2.1 TDD
Dedicated CORESET parameters	$Config_{SCell}$ 1		CCR.1.1 FDD
	$Config_{SCell}$ 2		CCR.1.1 TDD
	$Config_{SCell}$ 3		CCR.2.1 TDD

OCNG Patterns	$Config_{SCell}$ 1,2		OP.1 Note 7
	$Config_{SCell}$ 3		OP.1 Note 8
SMTC Configuration			SMTC.4
SSB Configuration	$Config_{SCell}$ 1,2		SSB.5 FR1
	$Config_{SCell}$ 3		SSB.6 FR1
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} Note 2		dBm/15 kHz	-104
SS-RSRP Note 3		dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
N_{oc} Note 2	$Config_{SCell}$ 1,2	dBm/SCS	-104
	$Config_{SCell}$ 3		-101
Io Note3	$Config_{SCell}$ 1,2	dBm/9.36MHz	-58.96
	$Config_{SCell}$ 3	dBm/38.16MHz	-52.86
Time offset to Cell1 Note 5		µs	3
Propagation Condition			AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modeled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselvess.

Note 4: Void

Note 5: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.

Note 6: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2 defined in clause 12 of TS 38.213 [3].

Note 7: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.

Note 8: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.

Note 9: $N_{RB,c}$. is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.

A.6.5.2.1.2 Test Requirements

The UE shall be continuously scheduled on PCell during the entire length of T1. During the time duration T1 the UE shall transmit at least 99.5% of ACK/NACK on PCell.

If the NR PCell is not in the same band as the deactivated SCell, the UE is only allowed to cause interruptions on NR PCell immediately before and immediately after an SMTC. Each interruption on NR PCell shall not exceed the value defined in Table A.6.5.2.1.2-1.

If the NR PCell is in the same band as the deactivated SCell, the UE is only allowed to cause an interruption on PCell no earlier than 1 slot before an SMTC and no later than 1 slot after the SMTC. the interruption on NR PCell shall not exceed the value defined in Table A.6.5.2.1.2-2.

Table A.6.5.2.1.2-1: Interruption duration if the PCell is not in the same band as the deactivated SCell

μ	NR Slot length (ms)	Interruption length
0	1	1
1	0.5	1

Table A.6.5.2.1.2-2: Interruption duration if the PCell is in the same band as the deactivated SCell

μ	NR Slot length (ms)	Interruption length
0	1	2 + SMTC duration
1	0.5	2 + SMTC duration

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.2.2 SA interruptions at NR SRS carrier based switching

A.6.5.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that when a UE needs to transmit aperiodic SRS, the UE can perform carrier based switching to one carrier not configured for PUCCH/PUSCH transmission from a carrier with PUCCH/PUSCH transmission. The test will partly verify the interruption requirements on PCell in clause 8.2.2.2.9.

A.6.5.2.2.2 Test Parameters

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the FR1 PCell and Cell 2 is activated SCell on the TDD SCC which operats in downlink without PUCCH/PUSCH. The UE is configured with the SRS switching between PCell and SCell.The test parameters for PCell and SCell are given in Table A.6.5.2.2.2-2 and A.6.5.2.2.2-3 below. The test consists of two successive time periods, with duration of T1 and T2, respectively. Immediately at the beginning of T2, the UE is triggered for SRS switching.

The test equipment verifies that potential interruption is carried out correctly by monitoring ACK/NACK sent in PCell.

Table A.6.5.2.2.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD – TDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD – TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD – TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.6.5.2.2.2-2: General test parameters for SA interruptions at NR SRS carrier based switching

Parameter	Unit	Value	Comment
RF Channel Number		1,2	Two NR radio channel (1, 2) are used for this test
Active PCell		Cell 1	Primary cell on NR RF channel number 1
Configured SCell		Cell 2	Activated secondary cell on NR RF channel number 2
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell

Cell2 timing offset to cell1	µs	0	
Time alignment error between cell2 and cell1	µs	≤ Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
T1	s	5	
T2	ms	40	UE shall perform SRS switching during T2

Table A.6.5.2.2.2-3: Cell specific test parameters for SA interruptions at NR SRS carrier based switching

Parameter		Unit	T1		T2	
			Cell 1	Cell 2	Cell 1	Cell 2
Duplex mode	Config 1		FDD	TDD	FDD	TDD
	Config 2,3		TDD			
TDD configuration	Config 1		N/A	TDDConf.1.1	N/A	TDDConf.1.1
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
$BW_{channel}$	Config 1,2	MHz	10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
Downlink initial BWP Configuration			DLBWP.0.1			
Downlink dedicated BWP Configuration			DLBWP.1.1			
Uplink initial BWP configuration			ULBWP.0.1			
Uplink dedicated BWP configuration			ULBWP.1.1			
TCI state			TCI.State.0			
TRS Configuration			TRS.1.1 TDD			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	SR.1.1 TDD	SR.1.1 FDD	SR.1.1 TDD
	Config 2		SR.1.1 TDD	SR.1.1 TDD	SR.1.1 TDD	SR.1.1 TDD
	Config 3		SR2.1 TDD	SR2.1 TDD	SR2.1 TDD	SR2.1 TDD
Dedicated CORESET parameters	Config 1		CCR.1.1 FDD	CCR.1.1 TDD	CCR.1.1 FDD	CCR.1.1 TDD
	Config 2		CCR.1.1 TDD	CCR.1.1 TDD	CCR.1.1 TDD	CCR.1.1 TDD
	Config 3		CCR.2.1 TDD	CCR.2.1 TDD	CCR.2.1 TDD	CCR.2.1 TDD
RMSI CORESET parameters	Config 1		CR.1.1 FDD	CR.1.1 TDD	CR.1.1 FDD	CR.1.1 TDD
	Config 2		CR.1.1 TDD	CR.1.1 TDD	CR.1.1 TDD	CR.1.1 TDD
	Config 3		CR2.1 TDD	CR2.1 TDD	CR2.1 TDD	CR2.1 TDD
OCNG Patterns			OP.1			
SRS Configuration	Config 1,2		SRS.1 TDD			
	Config 3		SRS.2 TDD			

SSB Configuration	Config 1,2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTC configuration			SMTC.1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note2	Config 1,2,4,5	dBm/15kHz	-104
	Config 3,6		-101
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
SS-RSRP Note3	Config 1,2,4,5	dBm/SCS	-87
	Config 3,6		-84
SCH_RP Note 3		dBm/15 kHz	-87
Propagation condition		-	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.

Table A.6.5.2.2.2-4: Void

A.6.5.2.2.3 Test Requirements

The UE shall be scheduled on PCell continuously throughout the test. During the time duration T2, the interruption on PCell shall not be more than the values specified for SA in clause 8.2.2.2.9.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.2.3 SA interruptions at NR SRS antenna port switching with 1 SRS symbol in a slot in NR-CA

A.6.5.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that when a UE performs SRS antenna port switching, i.e. transmits SRS on the antenna port(s) not used for PUCCH/PUSCH transmission and on the antenna port(s) used for PUCCH/PUSCH transmission at different SRS transmission occasions. The test will partly verify the interruption requirements on PCell and SCell in clause 8.2.2.2.16. The interruption requirement is defined based on the band combination capability

reported by UE, i.e., based on *txSwitchImpactToRx* or *txSwitchWithAnotherBand* as specified in requirement applicability in clause 8.2.2.2.16.

A.6.5.2.3.2 Test Parameters

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the FR1 PCell and Cell 2 is activated SCell on the TDD PCC. Only PCC may be configured with more than 1 SRS resources in each SRS resource set with usage set to 'antennaSwitching'. The test parameters for PCell and SCell are given in Table A.6.5.2.3.2-2 and A.6.5.2.3.2-3 below. The test consists of two successive time periods, with duration of T1 and T2, respectively. Immediately at the beginning of T2, the UE is configured with periodic SRS for antenna port switching via RRC reconfiguration. Note that the RRC reconfiguration message should be sent to UE at the time 50ms before the beginning of T2.

The test equipment verifies that potential interruption is carried out correctly by monitoring ACK/NACK sent in SCell.

Table A.6.5.2.3.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode for NR PCell and FDD duplex mode for NR SCell
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode for NR PCell and TDD duplex mode for NR SCell
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode for NR PCell and TDD duplex mode for NR SCell
Note1: The UE is only required to be tested in one of the supported test configurations. Note2: Test configuration for NR PCell and NR SCell are chosen independently.	

Table A.6.5.2.3.2-2: General test parameters for SA interruptions at NR SRS antenna switching

Parameter	Unit	Value	Comment
RF Channel Number		1,2	Two NR radio channel (1, 2) are used for this test
Active PCell		Cell 1	Primary cell on NR RF channel number 1
Configured SCell		Cell 2	Activated secondary cell on NR RF channel number 2
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
Cell2 timing offset to cell1	μs	0	
Time alignment error between cell2 and cell1	μs	≤ Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
T1	s	5	
T2	ms	40	UE shall perform SRS antenna switching during T2

Table A.6.5.2.3.2-3: Cell specific test parameters for SA interruptions at NR SRS antenna switching

Parameter		Unit	T1		T2	
			Cell 1	Cell 2	Cell 1	Cell 2
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		N/A			
	Config 2		TDDConf.1.2			
	Config 3		TDDConf.2.3			
$BW_{channel}$	Config 1,2	MHz	10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			

Downlink initial BWP Configuration			DLBWP.0.1			
Downlink dedicated BWP Configuration			DLBWP.1.1			
Uplink initial BWP configuration			ULBWP.0.1			
Uplink dedicated BWP configuration			ULBWP.1.1			
TCI state			TCI.State.0			
TRS Configuration			TRS.1.1 TDD			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	SR.1.1 FDD	SR.1.1 FDD	SR.1.1 FDD
	Config 2		SR.1.1 TDD	SR.1.1 TDD	SR.1.1 TDD	SR.1.1 TDD
	Config 3		SR2.1 TDD	SR2.1 TDD	SR2.1 TDD	SR2.1 TDD
Dedicated CORESET parameters	Config 1		CCR.1.1 FDD	CCR.1.1 FDD	CCR.1.1 FDD	CCR.1.1 FDD
	Config 2		CCR.1.1 TDD	CCR.1.1 TDD	CCR.1.1 TDD	CCR.1.1 TDD
	Config 3		CCR.2.1 TDD	CCR.2.1 TDD	CCR.2.1 TDD	CCR.2.1 TDD
RMSI CORESET parameters	Config 1		CR.1.1 FDD	CR.1.1 FDD	CR.1.1 FDD	CR.1.1 FDD
	Config 2		CR.1.1 TDD	CR.1.1 TDD	CR.1.1 TDD	CR.1.1 TDD
	Config 3		CR2.1 TDD	CR2.1 TDD	CR2.1 TDD	CR2.1 TDD
OCNG Patterns			OP.1			
SRS Configuration	Config 1,2		SRS.1, with dedicated SRS configuation in Table A.6.5.2.3.2-4			
	Config 3		SRS.2, with dedicated SRS configuation in Table A.6.5.2.3.2-4			
SSB Configuration	Config 1,2		SSB.1 FR1			
	Config 3		SSB.2 FR1			
SMTC configuration			SMTC.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 2)						
N_{oc} Note3	Config 1,2,4,5	dBm/15kHz	-104			
	Config 3,6		-101			

$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
SS-RSRP Note4	Config 1,2,4,5	dBm/SCS	-87
	Config 3,6		-84
SCH_RP Note 4		dBm/15 kHz	-87
Propagation condition		-	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.
Note 5: Test configuration for NR PCell and NR SCell are chosen independently.

Table A.6.5.2.3.2-4: Specific Sounding Reference Symbol Configuration for xTyR configuration

Parameter		xTyR configuration							
		1T2R		2T4R		1T4R			
srs-ResourceId		0	1	0	1	0	1	2	3
startPosition		3	3	3	3	3	3	3	3
nrofSRS-Ports		port1	port1	port2	port2	port1	port1	port1	port1
nrofSymbols		1	1	1	1	1	1	1	1
periodicityAndOffset-p	Config 1,2	sl40, 1	sl40, 6	sl40, 1	sl40, 6	sl40, 1	sl40, 6	sl40, 11	sl40, 16
	Config 3	sl80, 3	sl80, 13	sl80, 3	sl80, 13	sl80, 3	sl80, 13	sl80, 23	sl80, 33

A.6.5.2.3.3 Test Requirements

The UE shall be scheduled on SCell continuously throughout the test.

During the time duration T2, the DL interruption on NR SCell during the SRS antenna switching in each SRS transmission slot on NR PCell shall not exceed 1 slot if SCell is indicated in *txSwitchImpactToRx*.

During the time duration T2, the UL interruption on NR SCell during the SRS antenna switching in each SRS transmission slot on NR PCell shall not exceed 1 slot if SCell is indicated in *txSwitchWithAnotherBand.*

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.2.4 SA interruptions at NR SRS antenna port switching

A.6.5.2.4.1 Test Purpose and Environment

The purpose of this test is to verify the interruption requirement on victim CC during SRS antenna port switching with more than 1 SRS symbols on aggressor CC defined in clause 8.2.2.2.16. The interruption requirement is defined based on the band combination capability reported by UE, i.e., based on *txSwitchImpactToRx* or *txSwitchWithAnotherBand* as specified in requirement applicability in clause 8.2.2.2.16.

A.6.5.2.4.2 Test Parameters

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the FR1 PCell and Cell 2 is FR1 SCell. The UE is configured with the SRS antenna port in FR1 PCell. The test parameters for PCell and SCell are given in Table A.6.5.2.4.2-2 and A.6.5.2.4.2-3 below. Common SRS configuration is given in A.3.24. Dedicated SRS configuration which is dependent on reported SRS capability *supportedSRS-TxPortSwitch*, is given in Table A.6.5.2.4.2-4. The test consists of two successive time periods, with duration of T1 and T2, respectively. Immediately at the beginning of T2, the UE is triggered for SRS antenna port switching.

The test equipment verifies that potential interruption is carried out correctly by monitoring ACK/NACK sent in PCell.

Table A.6.5.2.4.2-1: Supported test configurations

Configuration	Description	
	NR PCell Note 2	**NR SCell** Note 2
1	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations. Note 2: Test configuration for NR PCell and NR SCell are chosen independently.		

Table A.6.5.2.4.2-2: General test parameters for SA interruptions at NR SRS antenna port switching

Parameter	Unit	Value	Comment
RF Channel Number		1,2	Two NR radio channel (1, 2) are used for this test
Active PCell		Cell 1	Primary cell on NR RF channel number 1
Configured SCell		Cell 2	Activated secondary cell on NR RF channel number 2
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
Cell2 timing offset to cell1	μs	0	
Time alignment error between cell2 and cell1	μs	≤ Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
T1	s	5	
T2	ms	40	UE shall perform SRS antenna port switching during T2

Table A.6.5.2.4.2-3: Cell specific test parameters for SA interruptions at NR SRS antenna port switching

Parameter		Unit	T1		T2	
			Cell 1	**Cell 2**	**Cell 1**	**Cell 2**
Duplex mode	Config 1		FDD	TDD	FDD	TDD
	Config 2,3		TDD			
TDD configuration	Config 1		N/A	TDDConf.1.2	N/A	TDDConf.1.2
	Config 2		TDDConf.1.2			
	Config 3		TDDConf.2.3			
$BW_{channel}$	Config 1,2	MHz	10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			

Downlink initial BWP Configuration			DLBWP.0.1			
Downlink dedicated BWP Configuration			DLBWP.1.1			
Uplink initial BWP configuration			ULBWP.0.1			
Uplink dedicated BWP configuration			ULBWP.1.1			
TCI state			TCI.State.0			
TRS Configuration			TRS.1.1 TDD			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	SR.1.1 TDD	SR.1.1 FDD	SR.1.1 TDD
	Config 2		SR.1.1 TDD	SR.1.1 TDD	SR.1.1 TDD	SR.1.1 TDD
	Config 3		SR2.1 TDD	SR2.1 TDD	SR2.1 TDD	SR2.1 TDD
Dedicated CORESET parameters	Config 1		CCR.1.1 FDD	CCR.1.1 TDD	CCR.1.1 FDD	CCR.1.1 TDD
	Config 2		CCR.1.1 TDD	CCR.1.1 TDD	CCR.1.1 TDD	CCR.1.1 TDD
	Config 3		CCR.2.1 TDD	CCR.2.1 TDD	CCR.2.1 TDD	CCR.2.1 TDD
RMSI CORESET parameters	Config 1		CR.1.1 FDD	CR.1.1 TDD	CR.1.1 FDD	CR.1.1 TDD
	Config 2		CR.1.1 TDD	CR.1.1 TDD	CR.1.1 TDD	CR.1.1 TDD
	Config 3		CR2.1 TDD	CR2.1 TDD	CR2.1 TDD	CR2.1 TDD
ptrs-portindex			NA.	n0	NA.	n1
OCNG Patterns			OP.1			
SSB Configuration	Config 1,2		SSB.1 FR1			
	Config 3		SSB.2 FR1			
SRS configuration	Config 1,2		SRS.x1 Note 4	-	SRS.1 Note 4	-
	Config 3		SRS.x2 Note 4	-	SRS.2 Note 4	-
SMTC configuration			SMTC.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	Config 1,2		-104			

	Config 3	dBm/15 kHz	-101
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
SS-RSRP Note3	Config 1,2	dBm/SCS	-87
	Config 3		-84
SCH_RP Note 3		dBm/15 kHz	-87
Propagation condition		-	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Dedicated SRS configuration in Table A.6.5.2.4.2-4

Table A.6.5.2.4.2-4: Dedicated Sounding Reference Symbol Configuration for xTyR configuration

Parameter		xTyR configuration							
		1T2R		2T4R		1T4R			
srs-ResourceId		0	1	0	1	0	1	2	3
nrofSymbols		1	1	1	1	1	1	1	1
startPosition		5	3	5	3	5	3	5	3
nrofSRS-Ports		port1	port1	port2	port2	port1	port1	port1	port1
periodicityAndOffset-p	Config 1,2	sl40, 1	sl40, 1	sl40, 1	sl40, 1	sl40, 1	sl40, 1	sl40, 6	sl40, 6
	Config 3	sl80, 3	sl80, 3	sl80, 3	sl80, 3	sl80, 3	sl80, 3	sl80, 13	sl80, 13

A.6.5.2.4.3 Test Requirements

The UE shall be scheduled on PCell continuously throughout the test. During the time duration T2, the interruption on SCell shall not be more than the values specified in Table 8.2.1.2.18-3 in clause 8.2.1.2.18 for each SRS transmission slot.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.3 SCell Activation and Deactivation Delay

A.6.5.3.1 SCell Activation and deactivation of known SCell in FR1 in non-DRX for 160ms SCell measurement cycle

A.6.5.3.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SCell activation and deactivation times are within the requirements stated in clause 8.3, when the SCell in FR1 is known by the UE at the time of activation.

The supported test configurations for NR PCell are shown in table A.6.5.3.1.1-1 below. Supported test configurations for NR SCell are shown in table A.6.5.3.1.1-1A. Test configuration for NR PCell and test configuration for NR SCell are chosen independently. The test parameters are given in Tables A.6.5.3.1.1-2 and

cell-specific parameters in A.6.5.3.1.1-3 and A.6.5.3.1.1-4 below. The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are two NR carriers, each with one cell. Both cells have constant signal levels throughout the test. Before the test starts the UE is connected to Cell 1, but is not aware of Cell2. The UE is only monitoring the PCC. The UE shall be continuously scheduled in the PCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 2) becomes configured on radio channel 2. The UE now starts monitoring the SCC. The test equipment sends a MAC message for activation of the SCell.

The point in time at which the MAC message is received at the UE antenna connector, in slot # denoted n, defines the start of time period T2. The UE shall be able to report valid CSI in PCell for the activated SCell at latest in slot $n + \frac{T_{\text{HARQ}} + T_{\text{activation_time}} + T_{\text{CSI_Reporting}}}{\text{NR slot length}}$, as defined in clause 8.3. The UE shall start reporting CSI in PCell after at least one CSI-RS transmission occasion for channel measurement and reporting after slot $n + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$ and shall report CQI index 0 (out-of-range) until the SCell activation has been completed. Any PCell interruption due to activation of SCell shall occur in the slot $n + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $n + 1 + \frac{T_{\text{HARQ}} + 3\text{ms} + T_{\text{X}}}{\text{NR slot length}} + N_{\text{interruption}}$, as defined in clause 8.3, where $N_{\text{interruption}}$ is the interruption length given in clause 8.2.

Time period T3 starts when a MAC message for deactivation of SCell, sent from the test equipment to the UE in a slot # denoted m, is received at the UE antenna connector. The UE shall carry out deactivation of the SCell in a slot $m + \frac{T_{\text{HARQ}} + 3ms}{NR\ slot\ length}$, as defined in clause 8.3, and The starting point of any PCell interruption due to the deactivation shall occur in the slot $m + 1 + \frac{T_{\text{HARQ}}}{NR\ slot\ length}$ to $m + 1 + \frac{T_{\text{HARQ}} + 3\text{ms}}{NR\ slot\ length}$, as defined in clause 8.3.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell during activation and deactivation of SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The test equipment verifies the deactivation time by counting the slots from the time when the SCell deactivation command is sent until CQI reporting for SCell is discontinued.

Table A.6.5.3.1.1-1: known FR1 SCell activation in non-DRX for 160ms SCell measurement cycle supported test configurations for NR PCell

Config	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration,	

Table A.6.5.3.1.1-1A: known FR1 SCell activation in non-DRX for 160ms SCell measurement cycle supported test configurations for NR SCell

$Config_{SCell}$	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration,	

Table A.6.5.3.1.1-2: General test parameters for known FR1 SCell activation case, 160ms SCell measurement cycle

Parameter	Unit	Value	Comment
RF Channel Number		1,2	Two NR radio channel (1, 2) are used for this test
Active PCell		Cell 1	Primary cell on NR RF channel number 1.
Configured deactivated SCell		Cell 2	Configured deactivated secondary cell on NR RF channel number 2
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
Cell-individual offset for cells on NR channel number	dB	0	Individual offset for cells on primary component carrier.
SCell measurement cycle (measCycleSCell)	ms	160	
Cell2 timing offset to cell1	µs	0	
Time alignment error between cell2 and cell1	µs	≤ Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
T1	s	7	During this time the PSCell shall be known and the SCell configured and detected.
T2	s	1	During this time the UE shall activate the SCell.
T3	s	1	During this time the UE shall deactivate the SCell.
T_{HARQ}	ms	Config 1: 2 Config 2: 3 Config 3: 2.5	k_1×NR slot length k_1 is a number of slots and is indicated by the PDSCH-to-HARQ-timing-indicator field in the DCI format, if present, or provided by *dl-DataToUL-ACK*, the value of k should be the minimum value defined in TS 38.213 [3] that will meet the timing constraints of this test case.
$T_{CSI_Reporting}$	ms	15	the delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting (clause 5.2.2.5 in TS 38.214) and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2]

Table A.6.5.3.1.1-3: Cell specific test parameters for NR PCell for known FR1 SCell activation case, 160ms SCell measurement cycle

Parameter		Unit	Cell 1		
			T1	T2	T3
Duplex mode	Config 1		FDD		
	Config 2,3		TDD		
TDD configuration	Config 1		Not applicable		
	Config 2		TDDConf.1.1		
	Config 3		TDDConf.2.1		
$BW_{channel}$	Config 1,2	MHz	Note 7		
	Config 3		Note 7		
$BW_{occupied}$	Config 1,2	RB	52 Note 5		
	Config 3		106 Note 6		
Initial BWP configuration			DLBWP.0.1		
TCI state			TCI.State.0		
TRS Configuration	Config 1		TRS.1.1 FDD		

	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD
	Config 2		SR.1.1 TDD
	Config 3		SR.2.1 TDD
Dedicated CORESET parameters	Config 1		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
RMSI CORESET parameters	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
OCNG Patterns	Config 1,2		OP.1 Note 5
	Config 3,		OP.1 Note 6
SSB Configuration	Config 1,2		SSB.1 FR1
	Config 3		SSB.2 FR1
CSI-RS configuration for CSI reporting (Note 8)	Config 1		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
SMTC configuration			SMTC.1
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity	Config 1,2	slot	5
	Config 3		10
CSI reporting offset	Config 1,2	slot	3
	Config 3		5
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} Note2	Config 1,2	dBm/SCS	-104
	Config 3		-101
$\hat{E}_s / I_{ot}$		dB	17
$\hat{E}_s / N_{oc}$		dB	17
SS-RSRP Note3	Config 1,2	dBm/SCS	-87
	Config 3		-84
SCH_RP Note 3		dBm/15 kHz	-87
Io Note3	Config 1,2	dBm/ 9.36MHz	-58.96
	Config 3	dBm/ 38.16MHz	-52.87
Propagation condition		-	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.

Note 3: SS-RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.

Note 5: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 6: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 7: $N_{RB,c}$. is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.
Note 8: On top of the reference configurations, CSI-RS offset should be set to meet the CSI reference resource timing definition in TS 38.214 cl. 5.2.2.5.

Table A.6.5.3.1.1-4: Cell specific test parameters for NR SCell for known FR1 SCell activation case, 160ms SCell measurement cycle

Parameter		Unit	Cell 2		
			T1	T2	T3
Duplex mode	$Config_{SCell}$ 1		FDD		
	$Config_{SCell}$ 2,3		TDD		
TDD configuration	$Config_{SCell}$ 1		Not applicable		
	$Config_{SCell}$ 2		TDDConf.1.1		
	$Config_{SCell}$ 3		TDDConf.2.1		
$BW_{channel}$	$Config_{SCell}$ 1,2	MHz	Note 7		
	$Config_{SCell}$ 3		Note 7		
$BW_{occupied}$	$Config_{SCell}$ 1,2	RB	52 Note 5		
	$Config_{SCell}$ 3		106 Note 6		
Initial BWP configuration			DLBWP.0.1		
TCI state			TCI.State.0		
TRS Configuration	$Config_{SCell}$ 1		TRS.1.1 FDD		
	$Config_{SCell}$ 2		TRS.1.1 TDD		
	$Config_{SCell}$ 3		TRS.1.2 TDD		
PDSCH Reference measurement channel	$Config_{SCell}$ 1		N/A		
	$Config_{SCell}$ 2		N/A		
	$Config_{SCell}$ 3		N/A		
Dedicated CORESET parameters	$Config_{SCell}$ 1		N/A		
	$Config_{SCell}$ 2		N/A		
	$Config_{SCell}$ 3		N/A		
RMSI CORESET parameters	$Config_{SCell}$ 1		N/A		
	$Config_{SCell}$ 2		N/A		
	$Config_{SCell}$ 3		N/A		
OCNG Patterns	$Config_{SCell}$ 1,2		OP.1 Note 5		
	$Config_{SCell}$ 3,		OP.1 Note 6		
SSB Configuration	$Config_{SCell}$ 1,2		SSB.1 FR1		
	$Config_{SCell}$ 3		SSB.2 FR1		
CSI-RS configuration for CSI reporting Note 8	$Config_{SCell}$ 1		CSI-RS.1.1 FDD		
	$Config_{SCell}$ 2		CSI-RS.1.1 TDD		
	$Config_{SCell}$ 3		CSI-RS.2.1 TDD		
SMTC configuration			SMTC.1		
reportConfigType			N/A		
reportQuantity			N/A		
CSI reporting periodicity	$Config_{SCell}$ 1,2	slot	N/A		
	$Config_{SCell}$ 3		N/A		
CSI reporting offset	$Config_{SCell}$ 1,2	slot	N/A		
	$Config_{SCell}$ 3		N/A		
EPRE ratio of PSS to SSS		dB	0		
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					

EPRE ratio of OCNG DMRS to SSS Note 1 EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} Note2	$Config_{SCell}$ 1,2	dBm/SCS	-104
	$Config_{SCell}$ 3		-101
$\hat{E}_s / I_{ot}$		dB	17
$\hat{E}_s / N_{oc}$		dB	17
SS-RSRP Note3	$Config_{SCell}$ 1,2	dBm/SCS	-87
	$Config_{SCell}$ 3		-84
SCH_RP Note 3		dBm/15 kHz	-87
Io Note3	$Config_{SCell}$ 1,2	dBm/ 9.36MHz	-58.96
	$Config_{SCell}$ 3	dBm/ 38.16MHz	-52.87
Propagation condition		-	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.
Note 3: SS-RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.
Note 5: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 6: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 7: $N_{RB,c}$. is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.
Note 8: On top of the reference configurations, CSI-RS offset should be set to meet the CSI reference resource timing definition in TS 38.214 cl. 5.2.2.5.

A.6.5.3.1.2 Test Requirements

During T2 the UE shall send the first CSI report for SCell in the first available uplink resource after at least one CSI-RS transmission occasion for channel measurement and reporting after slot (n + 1 + $\frac{T_{HARQ}+3ms}{NR\ slot\ length}$). UE is allowed to postpone CSI report to next available UL resource if an available uplink resource is subject to interruption.

During T3 the UE shall stop sending CSI reports for SCell at latest in a slot m + $\frac{T_{HARQ}+3ms}{NR\ slot\ length}$, as defined in clause 8.3.

During T2 interruption of PCell / PSCell during SCell activation shall not happen outside the slot $n + 1 + \frac{T_{HARQ}}{\text{NR slot length}}$ to $n + 1 + \frac{T_{HARQ}+3ms+T_X}{\text{NR slot length}} + N_{interruption}$, as defined in clause 8.3.

During T3 the starting point of interruption of PCell during SCell deactivation shall not happen outside the slot m + 1 + $\frac{T_{HARQ}}{NR\ slot\ length}$ to m + 1 + $\frac{T_{HARQ}+3ms}{NR\ slot\ length}$, as defined in clause 8.3.

The interruption on any activated serving cell shall not be more than the values specified for SA in clause 8.2.2.2.2.

All of the above test requirements shall be fulfilled in order for the observed SCell activation delay and SCell deactivation delay to be counted as correct. The rate of correct observed SCell activation delay and SCell deactivation delay during repeated tests shall be at least 90%.

NOTE: During T2 if there are no uplink resources for reporting the valid CSI in a slot $\frac{T_{HARQ}+T_{activtion_time}+T_{CSI_Reporting}}{NR\ slot\ length}$ as defined in clause 8.3 then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

A.6.5.3.2 SCell Activation and deactivation of known SCell in FR1 in non-DRX for 640 ms SCell measurement cycle

A.6.5.3.2.1 Test Purpose and Environment

The purpose of this test case is the same as for the test defined in clause A.6.5.3.1.1. The supported test configurations are the same as defined in clause A.6.5.3.1.1. The test parameters are the same except those described in the following clause. The listed parameter values in Tables A.6.5.3.2.1-1 will replace the values of corresponding parameters in Tables A.4.5.3.1.1-1.

Table A.6.5.3.2.1-1: General test parameters for known FR1 SCell activation case, 640 ms SCell measurement cycle

Parameter	Unit	Value	Comment
SCell measurement cycle (measCycleSCell)	ms	640	

A.6.5.3.2.2 Test Requirements

The test requirements defined in clause A.6.5.3.1.2 shall apply to this test case, except $T_{activation_time}$ will be replaced with the value $T_{FirstSSB_MAX} + T_{rs} + 5ms$.

A.6.5.3.3 SCell Activation and deactivation of unknown SCell in FR1 in non-DRX

A.6.5.3.3.1 Test Purpose and Environment

The purpose of this test is to verify that the SCell activation and deactivation times are within the requirements stated in clause 8.3, when the SCell in FR1 is known by the UE at the time of activation.

The supported test configurations are shown in table A.6.5.3.1.1-1 below. The test parameters are given in Tables A.6.5.3.1.1-2 and cell-specific parameters in A.6.5.3.1.1-3 below. The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are two NR carriers, each with one cell. Both cells have constant signal levels throughout the test. Before the test starts the UE is connected to Cell 1, but is not aware of Cell2. The UE is only monitoring the PCC. The UE shall be continuously scheduled in the PCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 2) becomes configured on radio channel 2. The UE now starts monitoring the SCC. The test equipment sends a MAC message for activation of the SCell.

The point in time at which the MAC message is received at the UE antenna connector, in slot # denoted n, defines the start of time period T2. The UE shall be able to report valid CSI in PCell for the activated SCell at latest in slot $n + \frac{T_{HARQ}+T_{activation_time}+T_{CSI_Reporting}}{\text{NR slot length}}$, as defined in clause 8.3. The UE shall start reporting CSI in PCell after at least one CSI-RS transmission occasion for channel measurement and reporting after slot $n + \frac{T_{HARQ}+3ms}{\text{NR slot length}}$ and shall report CQI index 0 (out-of-range) until the SCell activation has been completed. Any PCell interruption due to activation of SCell shall occur in the slot $n + 1 + \frac{T_{HARQ}}{\text{NR slot length}}$ to $n + 1 + \frac{T_{HARQ}+3ms+T_X}{\text{NR slot length}} + N_{\text{interruption}}$, as defined in clause 8.3, where $N_{\text{interruption}}$ is the interruption length given in clause 8.2.

Time period T3 starts when a MAC message for deactivation of SCell, sent from the test equipment to the UE in a slot # denoted m, is received at the UE antenna connector. The UE shall carry out deactivation of the SCell in a slot

$m + \frac{T_{HARQ}+3ms}{NR\ slot\ length}$, as defined in clause 8.3, and The starting point of any PCell interruption due to the deactivation shall occur in the slot $m + 1 + \frac{T_{HARQ}}{NR\ slot\ length}$ to $m + 1 + \frac{T_{HARQ}+3ms}{NR\ slot\ length}$, as defined in clause 8.3.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell during activation and deactivation of SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The test equipment verifies the deactivation time by counting the slots from the time when the SCell deactivation command is sent until CQI reporting for SCell is discontinued.

Table A.6.5.3.3.1-1: General test parameters for unknown FR1 SCell activation case, 160ms SCell measurement cycle

Parameter	Unit	Value	Comment
T1	ms	100	During this time the PSCell shall be known and the SCell configured, but not detected.

A.6.5.3.3.2 Test Requirements

The test requirements defined in clause A.6.5.3.1.2 shall apply to this test case, except $T_{activation_time}$ will be replaced with the value $T_{FirstSSB_MAX} + T_{SMTC_MAX} + 2*T_{rs} + 5ms$ as defined in clause 8.3.

A.6.5.3.4 Direct SCell activation at SCell addition of known SCell in FR1

A.6.5.3.4.1 Test Purpose and Environment

The purpose of this test is to verify fulfillment of direct SCell activation delay and interruption requirements at SCell addition as defined in clause 8.3.4 and 8.2.2, respectively. The supported test configurations are shown in Table A.6.5.3.4.1-1.

The test scenario comprises one PCell (Cell 1) and one SCell (Cell 2) as outlined in Table A.6.5.3.4.1-2. Cell-specific parameters are provided in Table A.6.5.3.4.1-3.

The test consists of two successive time periods with duration T1 and T2, respectively. There are two carriers, each with one cell. Cell 1 (PCell) is on RF channel 1 (PCC), and Cell 2 (SCell) is on RF channel 2 (SCC). Cell 1 and Cell 2 both operate according to one of the configurations in Table A.6.5.3.4.1-1.

Before the test starts the UE is connected to Cell 1 on RF channel 1. The UE is only monitoring RF channel 1 and is not aware of Cell 2 on RF channel 2.

The UE is continuously scheduled in PCell throughout the test.

At the beginning of T1 the UE is configured to measure RF channel 2 in measurement gaps. During T1, the UE detects and measures Cell 2 on RF channel 2, and sends a measurement report containing Cell 2 to the test equipment. After having received a measurement report containing Cell 2, the test equipment deconfigures the measurement gaps and thereafter sends a RRC connection reconfiguration message to the UE by which it configures the SCell (Cell 2) in activated state (*sCellState* is set to *activated*). The time between reception of the last measurement report carrying SCell and transmission of the RRC connection reconfiguration message directly activating SCell is kept short enough to allow the SCell to remain known to the UE.

Time period T2 starts when the UE receives the RRC connection reconfiguration message at the UE antenna connector. The corresponding slot at which the message is received at the UE antenna connector is denoted *n*. The UE shall complete activation of the SCell no later than in slot $n + \frac{N_{direct}}{NR\ slot\ length}$, as specified in clause 8.3.4. From slot $n + \frac{N_{direct}}{NR\ slot\ length}$ and onwards the UE shall report valid CSI both for PCell and SCell.

The test equipment verifies the activation time by counting the slots between the RRC connection reconfiguration message is sent and until CSI report with non-zero CQI for both PCell and SCell is received.

The test equipment verifies that interruptions on other serving cells are within the requirements by counting ACK/NACKs transmitted in PCell.

Table A.6.5.3.4.1-1: Supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.5.3.4.1-2: General test parameters

Parameter	Unit	Value	Comment
NR RF Channel Number		1, 2	Two NR radio channels are used for this test
Active PCell		Cell 1	Primary cell on NR RF channel number 1.
Inter-frequency neighbor cell (SCell to-be)		Cell 2	Inter-frequency neighbor cell on NR RF channel number 2
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
Measurement gap pattern		gp0	Measurement gap is used during parts of time period T1 for detection of Cell 2.
CSI reporting periodicity	ms	2	CSI reporting periodicity for periodic reporting of CQI for PCell and, when added, SCell.
SCell measurement cycle (measCycleSCell)	ms	160	Measurement cycle for SCell does not come into effect in direct activation at SCell addition.
Timing offset between Cell 1 and Cell 2	µs	≤ MRTD	The value of maximum timing offset depends upon the carrier aggregation scenario.
T1	s	7	During this time period the PCell shall be known and Cell 2 shall be detected as an inter-frequency neighbor cell.
T2	s	1	During this time period Cell 2 shall be configured and directly activated as SCell.
THARQ	ms	k1×NR slot length	k1 is a number of slots indicated by the PDSCH-to-HARQ_feedback timing indicator field in a corresponding DCI format or provided by dl-DataToUL-ACK if the PDSCH-to-HARQ feedback timing field is not present in the DCI format, the value is defined in 38.213 [3]
TCSI_Reporting	ms	2	the delay uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2]
k	ms	$k_1 + 3 \cdot N_{\text{slot}}^{\text{subframe},\ \mu} + 1$	As specified in clause 4.3 of TS 38.213 [3]

Table A.6.5.3.4.1-3: NR Cell specific test parameters

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
$BW_{channel}$	Config 1,2	MHz	10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
BWP configuration	Initial DL		DLBWP.0.1		---	DLBWP.0.1

	Initial UL		ULBWP.0.1		---
	Dedicated DL		DLBWP.1.1		DLBWP.1.1
	Dedicated UL		ULBWP.1.1		---
TCI state			TCI.State.0	---	TCI.State.0
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD	---	CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD		CSI-RS.2.1 TDD
TRS Configuration	Config 1		TRS.1.1 FDD	---	TRS.1.1 FDD
	Config 2		TRS.1.1 TDD		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD		TRS.1.2 TDD
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	---	SR.1.1 FDD
	Config 2		SR.1.1 TDD		SR.1.1 TDD
	Config 3		SR.2.1 TDD		SR.2.1 TDD
Dedicated CORESET parameters	Config 1		CCR.1.1 FDD	---	CCR.1.1 FDD
	Config 2		CCR.1.1 TDD		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD		CCR.2.1 TDD
RMSI CORESET parameters	Config 1		CR.1.1 FDD	---	
	Config 2		CR.1.1 TDD		
	Config 3		CR.2.1 TDD		
OCNG Pattern			OP.1	OP.1	
SSB Configuration	Config 1,2		SSB.1 FR1	SSB.1 FR1	
	Config 3		SSB.2 FR1	SSB.2 FR1	
SMTC configuration			SMTC.1	SMTC.1	
reportConfigType			periodic	N/A	
reportQuantity			cri-RI-PMI-CQI	N/A	
CSI reporting periodicity	Config 1,2	slot	5	N/A	
	Config 3		10	N/A	
CSI reporting offset	Config 1,2	slot	3	N/A	
	Config 3		5	N/A	
EPRE ratio of PSS to SSS		dB	0		
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS Note1					
EPRE ratio of OCNG to OCNG DMRS Note1					
N_{oc} Note2	Config 1,2	dBm/15kHz	-104	-104	
	Config 3		-101	-101	
$\hat{E}_s/I_{ot}$		dB	17	17	
$\hat{E}_s/N_{oc}$		dB	17	17	
SS-RSRP Note3	Config 1,2	dBm/SCS	-87	-87	
	Config 3		-84	-84	
Io Note3	Config 1,2	dBm/9.36 MHz	-59.0	-59.0	
	Config 3	dBm/38.16 MHz	-52.9	-52.9	
Propagation condition			AWGN	AWGN	
Correlation Matrix and Antenna Configuration			1x2 Low	1x2 Low	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP, SCH_RP, and Io levels have been derived from other parameters for information purpose. They are not settable parameters themselves.

A.6.5.3.4.2 Test Requirements

The UE shall complete the direct activation of the SCell no later than at slot $n + \frac{N_{direct}}{\text{NR slot length}}$.

The UE shall report non-zero CQI for SCell from slot $n + \frac{N_{direct}}{\text{NR slot length}}$ and onwards throughout time period T2.

The interruption on PCell during direct activation of the SCell shall occur within the interruption window specified in clause 8.3.4 and shall not exceed the length specified in clause 8.2.2.2.11.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.3.5 Direct SCell activation at handover with known SCell in FR1

A.6.5.3.5.1 Test Purpose and Environment

This test is to verify the requirement for the FDD-FDD and TDD-TDD intra frequency handover with direct SCell activation requirements specified in subclause 8.3.5.

Supported test configurations for NR PCell are shown in table A.6.5.3.5.1-1. Supported test configurations for NR SCell are shown in table A.6.5.3.5.1-1A. Test configuration for NR PCell and test configuration for NR SCell are chosen independently. Both handover with direct SCell activation requirements are tested by using the parameters in table A.6.5.3.5.1-2, A.6.5.3.5.1-3 and A.6.5.3.5.1-4.

The test scenario comprises of three NR FDD or NR TDD FR1 carriers and the 3 cells as given in tables A.6.5.3.5.1-1 and A.6.5.3.5.1-2. The test consists of three successive time periods, with time durations of T1, T2, and T3 respectively.

At the start of time duration T1, the UE is in connected mode with PCell and SCell1 (cell 2) is in activated state and UE is reporting CQI for both PCell and SCell1.

Time period T2 starts when UE receives a handover command to Cell 3 that also activates SCell1 (Cell2). This is done using an *RRCReconfiguration* message with parameter *sCellState* set to *activated* for the SCell1 (Cell 2). The message is sent from the test equipment to the UE and is received in a subframe # denoted n at the UE antenna connector. The UE shall accomplish the activation of the SCell no later than subframe ($n + N_{direct}$).

Time period T3 starts at ($n + N_{direct}$), at which point UE shall be reporting a valid CQI for both PCell and SCell1.

Table A.6.5.3.5.1-1: Intra-frequency handover with direct SCell activation from FR1 to FR1 test configurations for NR PCell

Config	Description
1	Source PCell: NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode Target PCell: NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	Source PCell: NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode Target PCell: NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	Source PCell: NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode Target PCell: NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration,	

Table A.6.5.3.5.1-1A: Intra-frequency handover with direct SCell activation from FR1 to FR1 test configurations for NR SCell

$Config_{SCell}$	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration.	

Table A.6.5.3.5.1-2: General test parameters Intra-frequency handover with direct SCell activation from FR1 to FR1

Parameter		Unit	Value	Comment
Initial conditions	PCell		Cell 1	
	SCell		Cell 2	
	Target cell		Cell 3	
Final condition	PCell		Cell 3	
	SCell		Cell 2	
	neighbour cell		Cell 1	
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
PRACH configuration index			FR1 PRACH configuration 1	As specified in table Table 6.3.3.2-3 in TS 38.211 [6]
Time offset between cells			3 μs	Synchronous cells
T1		s	5	UE is in connected mode with PCell and SCell1 (cell 2) is in activated state. UE receives a handover command
T2		s	N_{direct}	UE shall accomplish the activation of the SCell
T3		s	1	
T_{HARQ}		slot	k	k is a number of slots indicated by the PDSCH-to-HARQ_feedback timing indicator field in a corresponding DCI format or provided by *dl-DataToUL-ACK* if the PDSCH-to-HARQ feedback timing field is not present in the DCI format, the value is defined in 38.213 [3]
$T_{CSI_Reporting}$		ms	2	the delay uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2]
k		ms	$k_1 + 3 \cdot N_{slot}^{subframe,\ \mu} + 1$	As specified in clause 4.3 of TS 38.213 [3]

Table A.6.5.3.5.1-3: Cell specific test parameters for NR PCell for NR FR1-FR1 Intra frequency handover with direct SCell activation test case

Parameter		Unit	Cell 1			Cell 3		
			T1	T2	T3	T1	T2	T3
NR RF Channel Number			1			1		
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
	Config 1		Not Applicable					

TDD configuration	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52
	Config 2		10: $N_{RB,c}$ = 52
	Config 3		40: $N_{RB,c}$ = 106
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52
	Config 2		10: $N_{RB,c}$ = 52
	Config 3		40: $N_{RB,c}$ = 106
DRx Cycle		ms	Not Applicable
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD
	Config 2		SR.1.1 TDD
	Config 3		SR.2.1 TDD
CORESET Reference Channel	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
TRS configuration	Config 1		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
OCNG Patterns			OCNG pattern 1
SMTC Configuration			SMTC pattern 1
SSB Configuration	Config 1,2		SSB.1 FR1
	Config 3		SSB.2 FR1
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz
	Config 3		30 kHz
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15 kHz
	Config 3		30 kHz
PRACH configuration			FR1 PRACH configuration 1
BWP configuraiton	Initial DL BWP		DLBWP.0.1
	Dedicated DL BWP		DLBWP.1.1
	Initial UL BWP		ULBWP.0.1
	Dedicated UL BWP		ULBWP.1.1
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity	Config 1,2	slot	5
	Config 3		10
CSI reporting offset	Config 1,2	slot	3
	Config 3		5
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			

EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} Note2		dBm/15kHz	-98					
N_{oc} Note2	Config 1,2	dBm/SCS	-98					
	Config 3		-95					
$\hat{E}_s/I_{ot}$		dB	8	8	8	8	8	8
$\hat{E}_s/N_{oc}$		dB	8	8	8	8	8	8
SSB_RP	Config 1,2	dBm/SCS	-90	-90	-90	-90	-90	-90
	Config 3	dBm/SCS	-87	-87	-87	-87	-87	-87
Io Note3	Config 1,2	dBm/ 9.36MHz	-61.41	-57.06	-57.06	-57.06	-57.06	-61.41
	Config 3	dBm/ 38.16MHz	-55.31	-50.96	-50.96	-50.96	-50.96	-55.31
Propagation condition		-	AWGN			AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.6.5.3.5.1-4: Cell specific test parameters for NR SCell for NR FR1-FR1 Intra frequency handover with direct SCell activation test case

Parameter		Unit	Cell 2		
			T1	T2	T3
NR RF Channel Number			2		
Duplex mode	$Config_{SCell}$ 1		FDD		
	$Config_{SCell}$ 2,3		TDD		
TDD configuration	$Config_{SCell}$ 1		Not Applicable		
	$Config_{SCell}$ 2		TDDConf.1.1		
	$Config_{SCell}$ 3		TDDConf.2.1		
$BW_{channel}$	$Config_{SCell}$ 1	MHz	10: $N_{RB,c}$ = 52		
	$Config_{SCell}$ 2		10: $N_{RB,c}$ = 52		
	$Config_{SCell}$ 3		40: $N_{RB,c}$ = 106		
BWP BW	$Config_{SCell}$ 1	MHz	10: $N_{RB,c}$ = 52		
	$Config_{SCell}$ 2		10: $N_{RB,c}$ = 52		
	$Config_{SCell}$ 3		40: $N_{RB,c}$ = 106		
DRx Cycle		ms	Not Applicable		
PDSCH Reference measurement channel	$Config_{SCell}$ 1		SR.1.1 FDD		
	$Config_{SCell}$ 2		SR.1.1 TDD		
	$Config_{SCell}$ 3		SR.2.1 TDD		
CORESET Reference Channel	$Config_{SCell}$ 1		CR.1.1 FDD		
	$Config_{SCell}$ 2		CR.1.1 TDD		
	$Config_{SCell}$ 3		CR.2.1 TDD		
TRS configuration	$Config_{SCell}$ 1		TRS.1.1 FDD		
	$Config_{SCell}$ 2		TRS.1.1 TDD		
	$Config_{SCell}$ 3		TRS.1.2 TDD		

OCNG Patterns			OCNG pattern 1		
SMTC Configuration			SMTC pattern 1		
SSB Configuration	$Config_{SCell}$ 1,2		SSB.1 FR1		
	$Config_{SCell}$ 3		SSB.2 FR1		
PDSCH/PDCCH subcarrier spacing	$Config_{SCell}$ 1,2	kHz	15 kHz		
	$Config_{SCell}$ 3		30 kHz		
PUCCH/PUSCH subcarrier spacing	$Config_{SCell}$ 1,2	kHz	15 kHz		
	$Config_{SCell}$ 3		30 kHz		
PRACH configuration			FR1 PRACH configuration 1		
BWP configuraiton	Initial DL BWP		DLBWP.0.1		
	Dedicated DL BWP		DLBWP.1.1		
	Initial UL BWP		ULBWP.0.1		
	Dedicated UL BWP		ULBWP.1.1		
EPRE ratio of PSS to SSS		dB	0		
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} Note2		dBm/15kHz	-98		
N_{oc} Note2	$Config_{SCell}$ 1,2	dBm/SCS	-98		
	$Config_{SCell}$ 3		-95		
$\hat{E}_s / I_{ot}$		dB	8	8	8
$\hat{E}_s / N_{oc}$		dB	8	8	8
SSB_RP	$Config_{SCell}$ 1,2	dBm/SCS	-90	-90	-90
	$Config_{SCell}$ 3	dBm/SCS	-87	-87	-87
Io Note3	$Config_{SCell}$ 1,2	dBm/ 9.36MHz	-61.41	-57.06	-61.41
	$Config_{SCell}$ 3	dBm/ 38.16MHz	-55.31	-50.96	-55.31
Propagation condition		-	AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.5.3.5.2 Test Requirements

The UE shall be capable to transmit valid CSI report for the directly activated SCell1 no later than in subframe $n+N_{direct}$.

The rate of correct observed SCell1 direct activation delay during repeated tests shall be at least 90%.

NOTE: The SCell activation delay, N_{direct}, can be expressed as: $N_{direct} = T_{RRC_process} + T_{interrupt} + T_2 + T_3 + T_{activation_time} + T_{CSI_Reporting} - 3ms$, where:

$T_{RRC_Process}$: RRC procedure delay defined in clause 12 of TS 38.331 [2],

$T_{interrupt}$: Interruption time during handover as specified in clause 6.1.1,

T_2: Delay from slot $n + \frac{T_{RRC_Process} + T_{interrupt}}{\text{NR slot length}}$ until UE has obtained a valid TA command for the target PCell,

T_3: Delay for applying the received TA for uplink transmission in the target PCell, and greater than or equal to k+1 slot, where k is defined in clause 4.2 in TS 38.213,

$T_{activation_time}$ and $T_{CSI_Reporting}$ are specified in clause 8.3.2, where the following definitions of $T_{FirstSSB}$ and $T_{FirstSSB_MAX}$ as defined in section 8.3.5 shall apply:

- $T_{FirstSSB}$: the time to the end of the first complete SSB burst indicated by the SMTC after slot n + $(TRRC_Process + Tinterrupt + T2 + T3)/(NR\ slot\ length)$
- $T_{FirstSSB_MAX}$: the time to the end of the first complete SSB burst indicated by the SMTC after slot n + $(TRRCProcess + Tinterrupt + T2 + T3)/(NR\ slot\ length)$

This gives a total of N_{direct} = 10 + 52 + T_{IU} + T_2 + T_3 + $T_{activation_time}$ + $T_{CSI_Reporting}$ - 3 ms = 62 + 10 + 13 + 6 + 20 + 2 - 3 = 94 ms for test configurations 1 and 2.

This gives a total of N_{direct} = 10 + 52 + T_{IU} + T_2 + T_3 + $T_{activation_time}$ + $T_{CSI_Reporting}$ - 3 ms = 62 + 10 + 13 + 6 + 20 + 2 - 3 = 94 ms for test configuration 3.

During T3 the UE shall send valid CSI reports for PCell and SCell1 with non-zero CQI index and continue to send CSI reports for PCell and SCell1 (Cell 2) with non-zero CQI index until the end of T3.

All of the above test requirements shall be fulfilled in order for the observed SCell1 direct activation delay to be counted as correct.

A.6.5.3.4 Fast SCell Activation of known SCell in FR1 in non-DRX for 160ms SCell measurement cycle

A.6.5.3.4.1 Test Purpose and Environment

The purpose of this test is to verify that the fast SCell activation and deactivation times are within the requirements stated in clause 8.3.16, when the SCell in FR1 is known by the UE at the time of activation.

The supported test configurations are shown in table A.6.5.3.4.1-1 below. The test parameters are given in Tables A.6.5.3.4.1-2 and cell-specific parameters in A.6.5.3.4.1-3 below. The test consists of two successive time periods, with duration of T1and T2, respectively. There are two NR carriers, each with one cell. Both cells have constant signal levels throughout the test. Before the test starts the UE is connected to Cell 1, but is not aware of Cell2. The UE is only monitoring the PCC. The UE shall be continuously scheduled in the PCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 2) becomes configured on radio channel 2. The UE now starts monitoring the SCC. The test equipment sends a MAC message for activation of the SCell and triggering the aperiodic CSI-RS for fast SCell activation.

The point in time at which the MAC message is received at the UE antenna connector, in slot # denoted n (where n mode 20=1), defines the start of time period T2. The UE shall be able to report valid CSI in PCell for the activated SCell at latest in slot n + $\frac{T_{HARQ} + T_{activation_time} + T_{CSI_Reporting}}{\text{NR slot length}}$, as defined in clause 8.3. The UE shall start reporting CSI in PCell after at least one CSI-RS transmission occasion for channel measurement and reporting after slot $n + \frac{T_{HARQ} + 3\text{ms}}{\text{NR slot length}}$ and shall report CQI index 0 (out-of-range) until the SCell activation has been completed. Any PCell interruption due to activation of SCell shall occur in the slot $n + 1 + \frac{T_{HARQ}}{\text{NR slot length}}$ to $n + 1 + \frac{T_{HARQ} + 3\text{ms} + T_X}{\text{NR slot length}} + N_{\text{interruption}}$, as defined in clause 8.3, where $N_{\text{interruption}}$ is the interruption length given in clause 8.2.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell during activation and deactivation of SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received.

Table A.6.5.3.4.1-1: known FR1 SCell activation in non-DRX for 160ms SCell measurement cycle supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration,	

Table A.6.5.3.4.1-2: General test parameters for known FR1 SCell activation case, 160ms SCell measurement cycle

Parameter	Unit	Value	Comment
RF Channel Number		1,2	Two NR radio channel (1, 2) are used for this test
Active PCell		Cell 1	Primary cell on NR RF channel number 1.
Configured deactivated SCell		Cell 2	Configured deactivated secondary cell on NR RF channel number 2
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
Cell-individual offset for cells on NR channel number	dB	0	Individual offset for cells on primary component carrier.
SCell measurement cycle (measCycleSCell)	ms	160	
Cell2 timing offset to cell1	µs	0	
Time alignment error between cell2 and cell1	µs	≤ Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
T1	s	7	During this time the PSCell shall be known and the SCell configured and detected.
T2	s	1	During this time the UE shall activate the SCell.
T_{HARQ}	ms	Config 1: 2 Config 2: 3 Config 3: 2.5	k_1×NR slot length k_1 is a number of slots and is indicated by the PDSCH-to-HARQ-timing-indicator field in the DCI format, if present, or provided by *dl-DataToUL-ACK*, the value of k should be the minimum value defined in TS 38.213 [3] that will meet the timing constraints of this test case.
$T_{CSI_Reporting}$	ms	15	the delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting (clause 5.2.2.5 in TS 38.214) and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2]

Table A.6.5.3.4.1-3: Cell specific test parameters for known FR1 SCell activation case, 160ms SCell measurement cycle

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		Not applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
$BW_{channel}$	Config 1,2	MHz	Note 7			
	Config 3		Note 7			
$BW_{occupied}$	Config 1,2	RB	52 Note 5			
	Config 3		106 Note 6			
Initial BWP configuration			DLBWP.0.2			
TCI state			TCI.State.0			
TRS Configuration	Config 1		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD		-	
	Config 2		SR.1.1 TDD		-	
	Config 3		SR.2.1 TDD		-	
Dedicated CORESET parameters	Config 1		CCR.1.1 FDD		-	
	Config 2		CCR.1.1 TDD		-	
	Config 3		CCR.2.1 TDD		-	
RMSI CORESET parameters	Config 1		CR.1.1 FDD		-	
	Config 2		CR.1.1 TDD		-	
	Config 3		CR.2.1 TDD		-	
OCNG Patterns	Config 1,2		OP.1 Note 5			
	Config 3,		OP.1 Note 6			
SSB Configuration	Config 1,2		SSB.1 FR1			
	Config 3		SSB.2 FR1			
Aperiodic CSI-RS for Scell activation	Config 1		N/A		TRS.1.3 FDD	
	Config 2		N/A		TRS.1.3 TDD	
	Config 3		N/A		TRS.1.4 TDD	
gapBetweenBursts		slots	N/A			
CSI-RS configuration for CSI reporting (Note 8)	Config 1		CSI-RS.1.1 FDD			
	Config 2		CSI-RS.1.1 TDD			
	Config 3		CSI-RS.2.1 TDD			
SMTC configuration			SMTC.1			
reportConfigType			periodic			
reportQuantity			cri-RI-PMI-CQI			
CSI reporting periodicity for PCell	Config 1,2	slot	5		-	
	Config 3		10		-	
CSI reporting offset for PCell	Config 1,2	slot	3		-	
	Config 3		5		-	
CSI reporting periodicity for SCell	Config 1,2	slot	5		N/A	
	Config 3		10		N/A	
CSI reporting offset for SCell	Config 1,2	slot	2		N/A	
	Config 3		4		N/A	
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						

EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	Config 1,2	dBm/SCS	-104	
	Config 3		-101	
$\hat{E}_s/I_{ot}$		dB	17	
$\hat{E}_s/N_{oc}$		dB	17	
SS-RSRP Note3	Config 1,2	dBm/SCS	-87	
	Config 3		-84	
CSI-RSRP Note3	Config 1,2	dBm/SCS		-87
	Config 3			-84
SCH_RP Note 3		dBm/15 kHz	-87	
Io Note3	Config 1,2	dBm/ 9.36MHz	-58.96	
	Config 3	dBm/ 38.16MHz	-52.87	
Propagation condition		-	AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.
Note 3: SS-RSRP, CSI-RSRP, Io and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.
Note 5: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 6: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 7: $N_{RB,c}$. is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.
Note 8: On top of the reference configurations, CSI-RS offset should be set to meet the CSI reference resource timing definition in TS 38.214 cl. 5.2.2.5.

A.6.5.3.4.2 Test Requirements

During T2 the UE shall send the first CSI report for SCell in the first available uplink resource after at least one CSI-RS transmission occasion for channel measurement and reporting after slot $(n + 1 + \frac{T_{HARQ}+3ms}{NR\ slot\ length})$. UE is allowed to postpone CSI report to next available UL resource if an available uplink resource is subject to interruption.During T2 the UE shall start sending CSI reports for SCell with non-zero CQI index at latest in a slot $n + \frac{T_{HARQ}+T_{activtion_time}+T_{CSI_Reporting}}{NR\ slot\ length}$, $T_{activation_time} = T_{FirstATRS} + 5ms$, as defined in clause 8.3.16.

During T2 the UE shall start sending CSI reports for SCell with non-zero CQI index at latest in a slot $n + \frac{T_{HARQ}+T_{activtion_time}+T_{CSI_Reporting}}{NR\ slot\ length}$, $T_{activation_time} = T_{FirstATRS} + 5ms$, as defined in clause 8.3.16.

During T2 interruption of PCell / PSCell during SCell activation shall not happen outside the slot $n + 1 + \frac{T_{HARQ}}{\text{NR slot length}}$ to $n + 1 + \frac{T_{HARQ}+3ms+T_X}{\text{NR slot length}} + N_{interruption}$, as defined in clause 8.3.16.

The interruption on any activated serving cell shall not be more than the values specified for SA in clause 8.2.2.2.2.

All of the above test requirements shall be fulfilled in order for the observed SCell activation delay and SCell deactivation delay to be counted as correct. The rate of correct observed SCell activation delay during repeated tests shall be at least 90%.

NOTE: During T2 if there are no uplink resources for reporting the valid CSI in a slot $\frac{T_{HARQ}+T_{activtion_time}+T_{CSI_Reporting}}{NR\ slot\ length}$ as defined in clause 8.3 then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

A.6.5.3.5 SCell Activation of known SCell in FR1 in non-DRX for 640 ms SCell measurement cycle

A.6.5.3.5.1 Test Purpose and Environment

The purpose of this test case is the same as for the test defined in clause A.6.5.3.5.1. The supported test configurations are the same as defined in clause A.6.5.3.5.1. The test parameters are the same except those described in the following clause. The listed parameter values in Tables A.6.5.3.5.1-1 will replace the values of corresponding parameters in Tables A.6.5.3.5.1-2 and the listed parameter values in Tables Table A.6.5.3.5.1-2 will replace the values of corresponding parameters in Tables A.6.5.3.5.1-3.

Table A.6.5.3.5.1-1: General test parameters for known FR1 SCell activation case, 640 ms SCell measurement cycle

Parameter	Unit	Value	Comment
SCell measurement cycle (measCycleSCell)	ms	640	

Table A.6.5.3.5.1-2: Cell specific test parameters for known FR1 SCell activation case, 640ms SCell measurement cycle

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
gapBetweenBursts		slots	2			

A.6.5.3.5.2 Test Requirements

The test requirements defined in clause A.6.5.3.5.2 shall apply to this test case, except $T_{activation_time}$ will be replaced with the value $T_{FirstATRS} + T_{gap} + T_{ATRS} + 5ms$.

A.6.5.3.6 PUCCH SCell Activation and deactivation of known SCell in FR1

A.6.5.3.6.1 Test Purpose and Environment

The purpose of this test is to verify that the PUCCH SCell activation and deactivation times are within the requirements stated in clause 8.3, when the PUCCH SCell in FR1 is known by the UE at the time of activation.

The supported test configurations are shown in table A.6.5.3.6.1-1 below. The test parameters are given in Tables A.6.5.3.6.1-2 and cell-specific parameters in A.6.5.3.6.1-3 below. The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are two NR carriers, each with one cell. Both cells have constant signal levels throughout the test. Cell 1 is the PCell in primary Timing Advance Group (pTAG) and cell 2 is the PUCCH SCell in the secondary Timing Advance Group (sTAG). Before the test starts the UE is connected to Cell 1, but is not aware of Cell2. The UE is only monitoring the PCC. The UE shall be continuously scheduled in the PCell throughout the whole test.

The test consists of two sub tests. In Test 1, UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment for sTAG. In Test 2, the TimeAlignmentTimer of sTAG expires before receiving the activation command.

At the beginning of T1 the UE receives an RRC message by which the PUCCH SCell (Cell 2) becomes configured on radio channel 2. The UE now starts monitoring the SCC. The test equipment sends a MAC message for activation of the PUCCH SCell.

The point in time at which the MAC message is received at the UE antenna connector, in slot # denoted n, defines the start of time period T2. In Test 1, the UE shall be able to report valid CSI on for the activated PUCCH SCell on PUCCH SCell at latest in slot n + $\frac{T_{\text{HARQ}}+T_{\text{activation_time}}+[X]+T_{\text{CSI_Reporting}}}{\text{NR slot length}}$, as defined in clause 8.3. In Test 2, the UE shall be able to report valid CSI on for the activated PUCCH SCell on PUCCH SCell at latest in slot n + $\frac{T_{HARQ}+T_{delay_PUCCH_SCell}}{NR\ slot\ length}$, as defined in clause 8.3.

Any PCell interruption due to activation of PUCCH SCell shall occur in the slot $n + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $n + 1 + \frac{T_{\text{HARQ}}+3\text{ms}+T_{\text{X}}}{\text{NR slot length}} + N_{\text{interruption}}$, as defined in clause 8.3, where $N_{\text{interruption}}$ is the interruption length given in clause 8.2.

Time period T3 starts when a MAC message for deactivation of PUCCH SCell, sent from the test equipment to the UE in a slot # denoted m, is received at the UE antenna connector. The UE shall carry out deactivation of the PUCCH SCell in a slot m + $\frac{\text{T}_{\text{HARQ}}+3ms}{NR\ slot\ length}$, as defined in clause 8.3, and The starting point of any PCell interruption due to the deactivation shall occur in the slot m + 1 + $\frac{\text{T}_{\text{HARQ}}}{NR\ slot\ length}$ to m + 1 + $\frac{\text{T}_{\text{HARQ}}+3\text{ms}}{NR\ slot\ length}$, as defined in clause 8.3.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell during activation and deactivation of PUCCH SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the PUCCH SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The test equipment verifies the deactivation time by counting the slots from the time when the PUCCH SCell deactivation command is sent until CQI reporting for PUCCH SCell is discontinued.

Table A.6.5.3.6.1-1: known FR1 SCell activation test configurations

Config	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration,	

Table A.6.5.3.6.1-2: General test parameters for known FR1 SCell activation case

Parameter	Unit	Value	Comment
RF Channel Number		1,2	Two NR radio channel (1, 2) are used for this test
Active PCell		Cell 1	Primary cell on NR RF channel number 1.
Configured deactivated SCell		Cell 2	Configured deactivated secondary cell on NR RF channel number 2

CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
Cell-individual offset for cells on NR channel number	dB	0	Individual offset for cells on primary component carrier.
SCell measurement cycle (measCycleSCell)	ms	160	
Cell2 timing offset to cell1	µs	0	
Time alignment error between cell2 and cell1	µs	≤ Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
TimeAlignmentTimer	ms	500	Test 1 and Test 2
T1	s	7	During this time the PCell shall be known and the SCell configured and detected.
T2	s	1	During this time the UE shall activate the SCell.
T3	s	1	During this time the UE shall deactivate the SCell.
T_{HARQ}	ms	Config 1: 2 Config 2: 3 Config 3: 2.5	k_1×NR slot length k_1 is a number of slots and is indicated by the PDSCH-to-HARQ-timing-indicator field in the DCI format, if present, or provided by *dl-DataToUL-ACK*, the value of k should be the minimum value defined in TS 38.213 [3] that will meet the timing constraints of this test case.
$T_{CSI_Reporting}$	ms	15	the delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting (clause 5.2.2.5 in TS 38.214) and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2]

Table A.6.5.3.6.1-3: Cell specific test parameters for known FR1 SCell activation case

Parameter		Unit	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
TDD configuration	Config 1		Not applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
$BW_{channel}$	Config 1,2	MHz	Note 7					
	Config 3		Note 7					
$BW_{occupied}$	Config 1,2	RB	52 Note 5					
	Config 3		106 Note 6					
Initial BWP configuration			DLBWP.0.2					
TCI state			TCI.State.0					
TRS Configuration	Config 1		TRS.1.1 FDD					
	Config 2		TRS.1.1 TDD					
	Config 3		TRS.1.2 TDD					
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD			-		
	Config 2		SR.1.1 TDD			-		
	Config 3		SR.2.1 TDD			-		
Dedicated CORESET parameters	Config 1		CCR.1.1 FDD			-		
	Config 2		CCR.1.1 TDD			-		
	Config 3		CCR.2.1 TDD			-		
	Config 1		CR.1.1 FDD			-		

RMSI CORESET parameters	Config 2		CR.1.1 TDD	-
	Config 3		CR.2.1 TDD	-
OCNG Patterns	Config 1,2		OP.1 Note 5	
	Config 3,		OP.1 Note 6	
SSB Configuration	Config 1,2		SSB.1 FR1	
	Config 3		SSB.2 FR1	
CSI-RS configuration for CSI reporting (Note 8)	Config 1		CSI-RS.1.1 FDD	
	Config 2		CSI-RS.1.1 TDD	
	Config 3		CSI-RS.2.1 TDD	
SMTC configuration			SMTC.1	
reportConfigType			periodic	
reportQuantity			cri-RI-PMI-CQI	
CSI reporting periodicity for PCell	Config 1,2	slot	5	-
	Config 3		10	-
CSI reporting offset for PCell	Config 1,2	slot	3	-
	Config 3		5	-
CSI reporting periodicity for SCell	Config 1,2	slot	-	5
	Config 3		-	10
CSI reporting offset for SCell	Config 1,2	slot	-	2
	Config 3		-	4
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	Config 1,2	dBm/SCS	-104	
	Config 3		-101	
$\hat{E}_s/I_{ot}$		dB	17	
$\hat{E}_s/N_{oc}$		dB	17	
SS-RSRP Note3	Config 1,2	dBm/SCS	-87	
	Config 3		-84	
SCH_RP Note 3		dBm/15 kHz	-87	
Io Note3	Config 1,2	dBm/ 9.36MHz	-58.96	
	Config 3	dBm/ 38.16MHz	-52.87	
Propagation condition		-	AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.

Note 3: SS-RSRP, Io and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.

Note 5: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.

Note 6: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.

Note 7:	$N_{RB,c}$. is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.
Note 8:	On top of the reference configurations, CSI-RS offset should be set to meet the CSI reference resource timing definition in TS 38.214 cl. 5.2.2.5.

A.6.5.3.6.2 Test Requirements

In Test1，during T2 the UE shall start sending CSI reports for PUCCH SCell with non-zero CQI index at latest in a slot n + $\frac{T_{\text{HARQ}}+T_{\text{activation_time}}+[X]+T_{\text{CSI_Reporting}}}{\text{NR slot length}}$, $T_{activation_time}$ = $T_{FirstSSB}$+ 5ms, as defined in clause 8.3. In Test2，during T2 the UE shall start sending CSI reports for PUCCH SCell with non-zero CQI index at latest in a slot n + $\frac{T_{HARQ}+T_{delay_PUCCH_SCell}}{NR\ slot\ length}$, $T_{activation_time}$ = $T_{FirstSSB}$+ 5ms, as defined in clause 8.3.

During T3 the UE shall stop sending CSI reports for PUCCH SCell at latest in a slot m + $\frac{\text{T}_{\text{HARQ}}+3\text{ms}}{NR\ slot\ length}$, as defined in clause 8.3.

During T2 interruption of PCell / PSCell during PUCCH SCell activation shall not happen outside the slot $n + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $n + 1 + \frac{T_{\text{HARQ}}+3\text{ms}+T_{\text{X}}}{\text{NR slot length}} + N_{\text{interruption}}$, as defined in clause 8.3.

During T3 the starting point of interruption of PCell during PUCCH SCell deactivation shall not happen outside the slot m + 1 + $\frac{\text{T}_{\text{HARQ}}}{NR\ slot\ length}$ to m + 1 + $\frac{\text{T}_{\text{HARQ}}+3\text{ms}}{NR\ slot\ length}$, as defined in clause 8.3.

The interruption on any activated serving cell shall not be more than the values specified for SA in clause 8.2.2.2.18.

All of the above test requirements shall be fulfilled in order for the observed PUCCH SCell activation delay and PUCCH SCell deactivation delay to be counted as correct. The rate of correct observed PUCCH SCell activation delay and PUCCH SCell deactivation delay during repeated tests shall be at least 90%.

NOTE: During T2 if there are no uplink resources for reporting the valid CSI in slot n + $\frac{T_{\text{HARQ}}+T_{\text{activation_time}}+[X]+T_{\text{CSI_Reporting}}}{\text{NR slot length}}$ in Test 1 or in slot n + $\frac{T_{HARQ}+T_{delay_PUCCH_SCell}}{NR\ slot\ length}$ in Test 2 as defined in clause 8.3 then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

A.6.5.3.7 SCell Activation and deactivation of unknown SCell in FR1 in non-DRX

A.6.5.3.7.1 Test Purpose and Environment

The purpose of this test is to verify that the PUCCH SCell activation and deactivation times are within the requirements stated in clause 8.3, when the PUCCH SCell in FR1 is unknown by the UE at the time of activation. In this test, UE shall support cross PUCCH group CSI reporting capability [TBD].

The supported test configurations are shown in Table A.6.5.3.7.1-1 below. The test parameters are given in Table A.6.5.3.7.1-2 and cell-specific parameters in Table A.6.5.3.7.1-3 below. The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are two NR carriers, each with one cell. Cell 1 is the PCell in primary Timing Advance Group (pTAG) and Cell 2 is the PUCCH SCell in the secondary Timing Advance Group (sTAG). Both cells have constant signal levels throughout the test.

There are two sub tests in this section.

For Test 1 (valid TA case), UE is provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment for sTAG.

For Test 2 (invalid TA case), TimeAlignmentTimer of sTAG expires before UE receives the activation command

Before the test starts the UE is connected to PCell, but is not aware of PUCCH SCell. The UE is only monitoring the PCC. The UE shall be continuously scheduled in the PCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the PUCCH SCell becomes configured on NR. During T1 the PUCCH SCell is powered off and UE is not aware of PUCCH SCell.

The point in time at which the MAC message is received at the UE antenna connector, in slot # denoted n, defines the start of time period T2. The UE shall be able to report valid CSI on PUCCH SCell for the activated PUCCH SCell at latest in

slot n + $\frac{T_{\text{HARQ}}+T_{\text{activation_time}}+[X]+T_{\text{CSI_Reporting}}}{\text{NR slot length}}$ for Test 1, or

slot n + $\frac{T_{HARQ}+T_{delay_PUCCH_SCell}}{NR\ slot\ length}$ for Test 2

Note: $T_{\text{delay_PUCCH_SCell}} = T_{\text{activation_time}} + [X] + \max((T_{\text{First_available_CSI}} + T_{\text{CSI_processing}}), (T1+T2+T3)) + T_{\text{CSI_reporting_after}}$, as defined in clause 8.3,

Any PCell interruption due to activation of PUCCH SCell shall occur in the slot $n + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $n + 1 + \frac{T_{\text{HARQ}}+T_{\text{X}}}{\text{NR slot length}} + N_{\text{interruption}}$, as defined in clause 8.3, where $N_{\text{interruption}}$ is the interruption length given in clause 8.2, and T_{X} is $T_{\text{activation_time}} + [X] + T_{\text{CSI_Reporting}}$ and $T_{\text{delay_PUCCH_SCell}}$ for Test 1 and Test 2, respectively.

Time period T3 starts when a MAC message for deactivation of PUCCH SCell, sent from the test equipment to the UE in a slot # denoted m, is received at the UE antenna connector. The UE shall carry out deactivation of the PUCCH SCell in a slot m + $\frac{T_{\text{HARQ}}+3ms}{NR\ slot\ length}$, as defined in clause 8.3, and the starting point of any PCell interruption due to the deactivation shall occur in the slot m + 1 + $\frac{T_{\text{HARQ}}}{NR\ slot\ length}$ to m + 1 + $\frac{T_{\text{HARQ}}+3\text{ms}}{NR\ slot\ length}$, as defined in clause 8.3.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell during activation and deactivation of PUCCH SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the PUCCH SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The test equipment verifies the deactivation time by counting the slots from the time when the PUCCH SCell deactivation command is sent until CQI reporting for PUCCH SCell is discontinued.

Table A.6.5.3.7.1-1: unknown FR1 PUCCH SCell activation in non-DRX for 160ms SCell measurement cycle supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration,	

Table A.6.5.3.7.1-2: General test parameters for unknown FR1 PUCCH SCell activation case, 160ms SCell measurement cycle

Parameter	Unit	Value	Comment
RF Channel Number		1,2	Two NR radio channel (1, 2) are used for this test
Active PCell		Cell 1	Primary cell on NR RF channel number 1.

Configured deactivated SCell		Cell 2	Configured deactivated PUCCH secondary cell on NR RF channel number 2
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
Cell-individual offset for cells on NR channel number	dB	0	Individual offset for cells on primary component carrier.
SCell measurement cycle (measCycleSCell)	ms	160	
Cell2 timing offset to cell1	µs	0	
Time alignment error between cell2 and cell1	µs	≤ Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
TimeAlighmentTimer	ms	500	Identify the whether TA information is valie or not
T1	s	[7]	During this time the PCell shall be known and the PUCCH SCell configured and detected.
T2	s	[1]	During this time the UE shall activate the PUCCH SCell.
T3	s	[1]	During this time the UE shall deactivate the PUCCH SCell.
T_{HARQ}	ms	Config 1: 2 Config 2: 3 Config 3: 2.5	k_1×NR slot length k_1 is a number of slots and is indicated by the PDSCH-to-HARQ-timing-indicator field in the DCI format, if present, or provided by *dl-DataToUL-ACK*, the value of k should be the minimum value defined in TS 38.213 [3] that will meet the timing constraints of this test case.
$T_{CSI_Reporting}$	ms	15	the delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting (clause 5.2.2.5 in TS 38.214) and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2]

Table A.6.5.3.7.1-3: Cell specific test parameters for unknown FR1 PUCCH SCell activation case, 160ms SCell measurement cycle

Parameter		Unit	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
TDD configuration	Config 1		Not applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
$BW_{channel}$	Config 1,2	MHz	Note 7					
	Config 3		Note 7					
$BW_{occupied}$	Config 1,2	RB	52 Note 5					
	Config 3		106 Note 6					
Initial BWP configuration			DLBWP.0.2					
TCI state			TCI.State.0					
TRS Configuration	Config 1		TRS.1.1 FDD					
	Config 2		TRS.1.1 TDD					
	Config 3		TRS.1.2 TDD					
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD			SR.1.1 FDD		
	Config 2		SR.1.1 TDD			SR.1.1 TDD		

	Config 3		SR.2.1 TDD	SR.2.1 TDD		
Dedicated CORESET parameters	Config 1		CCR.1.1 FDD	CCR.1.1 FDD		
	Config 2		CCR.1.1 TDD	CCR.1.1 TDD		
	Config 3		CCR.2.1 TDD	CCR.2.1 TDD		
RMSI CORESET parameters	Config 1		CR.1.1 FDD	N/A		
	Config 2		CR.1.1 TDD	N/A		
	Config 3		CR.2.1 TDD	N/A		
OCNG Patterns	Config 1,2		OP.1 Note 5			
	Config 3,		OP.1 Note 6			
SSB Configuration	Config 1,2		SSB.1 FR1			
	Config 3		SSB.2 FR1			
CSI-RS configuration for CSI reporting (Note 8)	Config 1		CSI-RS.1.1 FDD			
	Config 2		CSI-RS.1.1 TDD			
	Config 3		CSI-RS.2.1 TDD			
SMTC configuration			SMTC.1			
reportConfigType			periodic			
reportQuantity			cri-RI-PMI-CQI			
CSI reporting (CQI index non 0) periodicity for PUCCH SCell	Config 1,2	slot	N/A	5		
	Config 3		N/A	10		
CSI reporting (CQI index non 0) offset for PUCCH SCell	Config 1,2	slot	N/A	4		
	Config 3		N/A	6		
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	Config 1,2	dBm/SCS	-104	N/A	-104	-104
	Config 3		-101	N/A	-101	-101
$\hat{E}_s/I_{ot}$		dB	17	-infinity	17	17
$\hat{E}_s/N_{oc}$		dB	17	-infinity	17	17
SS-RSRP Note3	Config 1,2	dBm/SCS	-87	-infinity	-87	-87
	Config 3		-84	-infinity	-84	-84
SCH_RP Note 3		dBm/15 kHz	-87	N/A	-87	-87
Io Note3	Config 1,2	dBm/ 9.36MHz	-58.96	N/A	-58.96	-58.96
	Config 3	dBm/ 38.16MHz	-52.87	N/A	-52.87	-52.87
Propagation condition		-	AWGN	N/A	AWGN	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.

Note 3: SS-RSRP, Io and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.

Note 5:	All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 6:	All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 7:	$N_{RB,c}$. is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.
Note 8:	On top of the reference configurations, CSI-RS offset should be set to meet the CSI reference resource timing definition in TS 38.214 cl. 5.2.2.5.

A.6.5.3.7.2 Test Requirements

During T2, as defined in clause 8.3, the UE shall start sending CSI reports for PUCCH SCell on PUCCH SCell with non-zero CQI index at latest in

a slot n + $\frac{\mathrm{T_{HARQ}} + T_{\mathrm{activtion_time}} + T_{\mathrm{CSI_Reporting}}}{NR\ slot\ length}$ for Test 1.

a slot n + $\frac{T_{HARQ} + T_{delay_PUCCH_SCell}}{NR\ slot\ length}$ for Test 2.

During T3 the UE shall stop sending CSI reports for PUCCH SCell at latest in a slot m + $\frac{\mathrm{T_{HARQ}} + 3\mathrm{ms}}{NR\ slot\ length}$, as defined in clause 8.3.

During T2 interruption of PCell during PUCCH SCell activation shall not happen outside the slot $n + 1 + \frac{T_{\mathrm{HARQ}}}{\mathrm{NR\ slot\ length}}$ to $n + 1 + \frac{T_{\mathrm{HARQ}} + 3\mathrm{ms} + T_{\mathrm{X}}}{\mathrm{NR\ slot\ length}} + N_{\mathrm{interruption}}$, as defined in clause 8.3.

During T3 the starting point of interruption of PCell during PUCCH SCell deactivation shall not happen outside the slot m + 1 + $\frac{\mathrm{T_{HARQ}}}{NR\ slot\ length}$ to m + 1 + $\frac{\mathrm{T_{HARQ}} + 3\mathrm{ms}}{NR\ slot\ length}$, as defined in clause 8.3.

The interruption on any activated serving cell shall not be more than the values specified for SA in clause 8.2.2.2.18.

All of the above test requirements shall be fulfilled in order for the observed PUCCH SCell activation delay and PUCCH SCell deactivation delay to be counted as correct. The rate of correct observed PUCCH SCell activation delay and PUCCH SCell deactivation delay during repeated tests shall be at least 90%.

NOTE: During T2 if there are no uplink resources for reporting the valid CSI in a slot n + $\frac{\mathrm{T_{HARQ}} + T_{\mathrm{activtion_time}} + T_{\mathrm{CSI_Reporting}}}{NR\ slot\ length}$ and in a slot n + $\frac{T_{HARQ} + T_{delay_PUCCH_SCell}}{NR\ slot\ length}$ for Test 1 and Test 2, respectively, as defined in clause 8.3 then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

A.6.5.3.8 SCell Activation and Deactivation of one FR1 known PUCCH SCell and one FR1 unknown SCell with single activation/deactivation command

A.6.5.3.8.1 Test Purpose and Environment

The purpose of this test is to verify the SCell activation and deactivation delay requirements for PUCCH SCell with multiple SCells specified in clause 8.3.13 and 8.3.15, when one configured deactivated known PUCCH SCells in FR1 and one configured unknown SCell in FR1 by the UE at the time of activation.

The supported test configurations are defined in table A.6.5.3.8.1-1 below. The test parameters are given in table A.6.5.3.8.1-2 and cell-specific parameters in A.6.5.3.8.1-3 below.

The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are three NR carriers. All Cells has constant signal levels throughout the test. Before the test starts the UE is connected to Cell 1 (PCC), but is not aware of Cell 2 (PUCCH SCell) and Cell 3(SCell). The UE is monitoring the Cell 1 (PCC). The

UE shall be continuously scheduled in the Cell 1 throughout the whole test. PCC, SCC of Cell 2 and SCC of Cell3 are on different FR1 bands.

At the beginning of T1 the UE receives an RRC message by which the PUCCH SCell (Cell 2) and SCell (Cell 3) become configured on radio channel 2 and 3 respectively.

A MAC message for activation of UCCH SCell (Cell 2) and SCell (Cell 3) is sent by the test equipment 100ms after the RRC message, in a slot # denoted m. The point in time at which the MAC message for activation of UCCH SCell (Cell 2) and SCell (Cell 3) is received at the UE antenna connector defines the start of time period T2. Immediately at beginning of T2 the transmission power of cell 2 and cell 3 are increased to same level as for cell 1. The UE shall be able to report valid CSI on PCell for the activated PUCCH SCell (Cell2) at latest in slot m + $\frac{T_{HARQ}+T_{delay_\mathrm{multiple_SCells_other_SCell}}}{NR\ slot\ length}$ as defined in clause 8.3.13 provided the PUCCH SCell can be successfully detected on the first attempt.

For Cell2 activtion, the UE shall start reporting CSI in PCell in slot $n + \frac{T_{\mathrm{HARQ}}+3\mathrm{ms}}{\mathrm{NR\ slot\ length}}$ and shall report CQI index 0 (out-of-range) until the PUCCH SCell activation has been completed. For Cell3 activtion, the UE shall start reporting CSI in PCell in slot $n + \frac{T_{\mathrm{HARQ}}+3\mathrm{ms}}{\mathrm{NR\ slot\ length}}$ and shall report CQI index 0 (out-of-range) until the DL SCell activation has been completed.

Any PCell interruption due to activation of PUCCH SCell shall occur in the slot $m + 1 + \frac{T_{\mathrm{HARQ}}}{\mathrm{NR\ slot\ length}}$ to slot $m + 1 + \frac{T_{\mathrm{HARQ}}+3\mathrm{ms}+T_{\mathrm{X}}}{\mathrm{NR\ slot\ length}} + N_{\mathrm{interruption}}$, as defined in clause 8.3, where $N_{\mathrm{interruption}}$ is the interruption length given in section 8.2.

Time period T3 starts when a MAC message for deactivation of the SCells (Cell 2 and Cell 3), sent from the test equipment to the UE in a slot # denoted n, is received at the UE antenna connector. The UE shall carry out deactivation of the PUCCH SCell at latest in slot n + $\frac{\mathrm{T_{HARQ}}+3ms}{NR\ slot\ length}$ as defined in clause 8.3. The starting point of PCell interruption due to the deactivation shall occur in the slot n + 1 + $\frac{\mathrm{T_{HARQ}}}{NR\ slot\ length}$ to n + 1 + $\frac{\mathrm{T_{HARQ}}+3\mathrm{ms}}{NR\ slot\ length}$, as defined in clause 8.3.

The test equipment verifies the PUCCH SCell activation time by counting the slots from the time when the PUCCH SCell activation command is sent until a CSI report with other than CQI index 0 is received. The test equipment verifies the DL SCell activation time by counting the slots from the time when the DL SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The test equipment verifies the PUCCH SCell deactivation time by counting the slots from the time when the SCell deactivation command is sent until CQI reporting for PUCCH SCell is discontinued. The test equipment verifies the DL SCell deactivation time by counting the slots from the time when the SCell deactivation command is sent until CQI reporting for DL SCell is discontinued.

Table A.6.5.3.8.1-1: Supported test configurations

Configuration	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration,	

Table A.6.5.3.8.1-2: General test parameters for unknown FR1 SCell activation case with 2 deactivated SCells, 160ms SCell measurement cycle

Parameter	Unit	Value	Comment
RF Channel Number		**1,2,3**	**Three NR radio channel (1, 2, 3) are used for this test**
Active Cell		Cell 1	Primary cell on NR RF channel number 1.
Configured deactivated PUCCH SCell		Cell 2	Configured deactivated PUCCH SCell on NR RF channel number 2 which is an inter-band CC to PCC of Cell 1;
Configured deactivated SCell		Cell 3	Configured deactivated SCell on NR RF channel number 3 which is an inter-band CC to PCC of Cell 1 and SCC of Cell2
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
Cell2 timing offset to cell1	µs	0	
Cell3 timing offset to cell1	µs	0	
Time alignment error between cell2 and cell1	µs	≤ Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
Time alignment error between cell3 and cell1	µs	≤ Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
SCell measurement cycle (measCycleSCell)	ms	160	
T1	ms	100	During this time the PSCell shall be known and the SCell configured, but not detected.
T2	s	1	During this time the UE shall activate the SCell.
T3	s	1	During this time the UE shall deactivate the SCell.
T_{HARQ}	ms	k_1NR slot length	k_1 is a number of slots indicated by the PDSCH-to-HARQ_feedback timing indicator field in a corresponding DCI format or provided by *dl-DataToUL-ACK* if the PDSCH-to-HARQ feedback timing field is not present in the DCI format, the value is defined in 38.213 [3]
$T_{CSI_Reporting}$	ms	15	the delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting (clause 5.2.2.5 in TS 38.214) and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2]
k	slot	$k_1 + 3 \cdot N_{\text{slot}}^{\text{subframe},\ \mu} + 1$	As specified in clause 4.3 of TS 38.213 [3]

Table A.6.5.3.8.1-3: Cell specific test parameters for known FR1 SCell activation case, 160ms SCell measurement cycle

Parameter		Unit	Cell 3		Cell 4	
			T2	T3	T2	T3
SSB ARFCN			Freq2		Freq3	
Duplex mode	Config 1,4		FDD			
	Config 2,3,5,6		TDD			

TDD configuration	Config 1,4		Not Applicable	
	Config 2,5		TDDConf.1.1	
	Config 3,6		TDDConf.2.1	
$BW_{channel}$	Config 1,4	MHz	10: $N_{RB,c}$ = 52	
	Config 2,5		10: $N_{RB,c}$ = 52	
	Config 3,6		40: $N_{RB,c}$ = 106	
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1	
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1	
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1	
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1	
DRX Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	SR.1.1 FDD
	Config 2,5		SR.1.1 TDD	SR.1.1 TDD
	Config 3,6		SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	CR.1.1 FDD
	Config 2,5		CR.1.1 TDD	CR.1.1 TDD
	Config 3,6		CR.2.1 TDD	CR.2.1 TDD
RMC CORESET Reference Channel	Config 1,4		CCR.1.1 FDD	CCR.1.1 FDD
	Config 2,5		CCR.1.1 TDD	CCR.1.1 TDD
	Config 3,6		CCR.2.1 TDD	CCR.2.1 TDD
TRS configuration	Config 1,4		TRS.1.1 FDD	TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD	TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD	TRS.1.2 TDD
OCNG Patterns			OP.1	
SMTC configuration			SMTC.1	
SSB configuration	Config 1,2,4,5		SSB.1 FR1	
	Config 3,6		SSB.2 FR1	
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15 kHz	
	Config 3,6		30kHz	
CSI-RS configuration for CSI reporting	Config 1,4		CSI-RS.1.1 FDD	
	Config 2,5		CSI-RS.1.1 TDD	
	Config 3,6		CSI-RS.2.1 TDD	
reportConfigType	Config 1-6		periodic	
reportQuantity	Config 1-6		cri-RI-PMI-CQI	
CSI reporting periodicity	Config 1,2,4,5	slot	5	N/A
CSI reporting offset	Config 3,6	slot	10	N/A
	Config 1,2,4,5		2	N/A
	Config 3,6		4	N/A
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2		dBm/15kHz	-104	
	Config 1,2,4,5		-104	

N_{oc} Note2	Config 3,6	dBm/SCS	-101
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
SS-RSRP Note3	Config 1,2,4,5	dBm/SCS	-87
	Config 3,6		-84
SCH_RP Note 3		dBm/15 kHz	-87
Propagation condition		-	AWGN
Io Note3	Config 1,2,4,5	dBm/ 9.36MHz	-58.96
	Config 3,6	dBm/ 38.16MHz	-52.87

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.
Note 3: SS-RSRP, Io and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.]
Note 5: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 6: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 7: $N_{RB,c}$. is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.

A.6.5.3.8.2 Test Requirements

During T2, the UE shall send the first CSI report for SCell in the first available uplink resource after slot (m+k). UE is allowed to postpone CSI report to next available uplink resource if an available uplink resource is subject to interruption. Whether CSI report in slot (m+k) was interrupted is checked by monitoring ACK/NACK sent in PCell in slot (m+k). And the UE shall be able to report valid CSI for the activated PUCCH SCell (Cell2) at latest in slot $m + \frac{T_{HARQ}+T_{delay_multiple_SCells_other_SCell}}{NR\ slot\ length}$ as defined in clause 8.3.13. And the PCell interruption due to activation of PUCCH SCell shall occur in the slot $m + 1 + \frac{T_{\mathrm{HARQ}}}{\mathrm{NR\ slot\ length}}$ to slot $m + 1 + \frac{T_{\mathrm{HARQ}}+3\mathrm{ms}+T_{\mathrm{X}}}{\mathrm{NR\ slot\ length}} + N_{\mathrm{interruption}}$, as defined in clause 8.3, where $N_{\mathrm{interruption}}$ is the interruption length given in section 8.2.

During T3, the UE shall carry out deactivation of the PUCCH SCell at latest in slot $n + \frac{T_{\mathrm{HARQ}}+3ms}{NR\ slot\ length}$ as defined in clause 8.3. And the starting point of PCell interruption due to the deactivation shall occur in the slot $n + 1 + \frac{T_{\mathrm{HARQ}}}{NR\ slot\ length}$ to $n + 1 + \frac{T_{\mathrm{HARQ}}+3\mathrm{ms}}{NR\ slot\ length}$, as defined in clause 8.3.

All of the above test requirements shall be fulfilled in order for the observed SCell activation delay and SCell deactivation delay to be counted as correct. The rate of correct observed SCell activation delay and SCell deactivation delay during repeated tests shall be at least 90%.

A.6.5.3.9 SCell Activation and deactivation of unknown PUCCH SCell and unknown DL SCell in FR1 in non-DRX

A.6.5.3.9.1 Test Purpose and Environment

The purpose of this test is to verify that the PUCCH SCell and DL SCell activation and deactivation times are within the requirements stated in clause 8.3.13, when the PUCCH SCell in FR1 and DL SCell in FR1 is unknown to the UE at the time of activation.

The supported test configurations are shown in table A.6.5.3.9.1-1 below. The test parameters are given in Tables A.6.5.3.9.1-2 and cell-specific parameters in A.6.5.3.9.1-3 below. The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are three NR carriers, each with one cell. All cells have constant signal levels throughout the test. Before the test starts the UE is connected to Cell 1, but is not aware of Cell2 (PUCCH SCell) and Cell3(DL SCell). The UE is only monitoring the PCC. The UE shall be continuously scheduled in the PCell throughout the whole test. PCC, SCC of Cell 2 and SCC of Cell 3 are on different bands. The primary PUCCH group contain Cell1 and the secondary PUCCH group contains Cell2 and Cell3.

At the beginning of T1 the UE receives an RRC message by which the PUCCH SCell (Cell 2) and DL SCell (Cell 3) becomes configured on radio channel 2 and 3 respectively. The UE starts monitoring the SCC1(Cell 2 CC) and SCC2(Cell 3 CC). The test equipment sends a MAC message for activation of the PUCCH SCell and DL SCell simultaneously.

The point in time at which the MAC message is received at the UE antenna connector, in slot # denoted n, defines the start of time period T2. The UE shall be able to report valid CSI in PCell for the activated PUCCH SCell at latest in slot $n+\frac{T_{HARQ}+T_{delay_multiple_SCells_PUCCH_SCell}}{NR\ slot\ length}$, and report valid CSI in PCell for the activated DL SCell at latest in slot $n+\frac{T_{HARQ}+T_{delay_multiple_SCells_other_SCell}}{NR\ slot\ length}$, as defined in clause 8.3.13. In this test case, both valid TA and invalid TA cases shall be tested.

Test for case when UE has valid TA: the *TimeAlignmentTimer* [2] associated with the TAG containing the PUCCH SCell is running, and $T_{delay_multiple_SCells_PUCCH_SCell} = T_{activation_time_multiple_scells} + [X]*T_{target_PL_RS} + T_{CSI_Reporting}$.

Test for case when UE do not have valid TA: $T_{delay_multiple_SCells_PUCCH_SCell} = T_{activation_time_multiple_scells} + \max((T_{First_available_CSI} + T_{CSI_processing}), [X]*T_{target_PL_RS}, (T1+T2+T3)) + T_{CSI_reporting_after}$

$T_{activation_time_multiple_scells}$ is the target SCell activation delay in millisecond in multiple SCell activation scenario as specified in section 8.3.7

For Cell2 activtion, the UE shall start reporting CSI in PCell in slot $n + \frac{T_{\mathrm{HARQ}}+3\mathrm{ms}}{\mathrm{NR\ slot\ length}}$ and shall report CQI index 0 (out-of-range) until the PUCCH SCell activation has been completed. For Cell3 activtion, the UE shall start reporting CSI in PCell in slot $n + \frac{T_{\mathrm{HARQ}}+3\mathrm{ms}}{\mathrm{NR\ slot\ length}}$ and shall report CQI index 0 (out-of-range) until the DL SCell activation has been completed.

Any PCell interruption due to activation of PUCCH SCell or DL SCell shall occur in the slot $n + 1 + \frac{T_{\mathrm{HARQ}}}{\mathrm{NR\ slot\ length}}$ to $n + 1 + \frac{T_{\mathrm{HARQ}}+3\mathrm{ms}+T_{\mathrm{X}}}{\mathrm{NR\ slot\ length}} + N_{\mathrm{interruption}}$, as defined in clause 8.3.13, where $N_{\mathrm{interruption}}$ is the interruption length given in clause 8.2.2.2.7.

Time period T3 starts when a MAC message for deactivation of PUCCH SCell abd DL SCell, sent from the test equipment to the UE in a slot # denoted m, is received at the UE antenna connector. The UE shall carry out deactivation of the SCell in a slot $\mathrm{m} + \frac{\mathrm{T_{HARQ}}+3ms}{NR\ slot\ length}$, as defined in clause 8.3.15, and the starting point of any PCell interruption due to the deactivation shall occur in the slot $\mathrm{m} + 1 + \frac{\mathrm{T_{HARQ}}}{NR\ slot\ length}$ to $\mathrm{m} + 1 + \frac{\mathrm{T_{HARQ}}+3\mathrm{ms}}{NR\ slot\ length}$, as defined in clause 8.3.15.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell during activation and deactivation of PUCCH SCell and DL SCell, respectively.

The test equipment verifies the PUCCH SCell activation time by counting the slots from the time when the PUCCH SCell activation command is sent until a CSI report with other than CQI index 0 is received. The test equipment verifies the DL SCell activation time by counting the slots from the time when the DL SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The test equipment verifies the PUCCH SCell deactivation time by counting the slots from the time when the SCell deactivation command is sent until CQI reporting for PUCCH SCell is discontinued. The test equipment verifies the DL SCell deactivation time by counting the slots from the time when the SCell deactivation command is sent until CQI reporting for DL SCell is discontinued.

Table A.6.5.3.9.1-1: unknown FR1 PUCCH SCell and DL SCell activation test configurations

Config	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode, for both PUCCH SCell and DL SCell
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode, for both PUCCH SCell and DL
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode, for both PUCCH SCell and DL
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration	

Table A.6.5.3.9.1-2: General test parameters for unknown FR1 PUCCH SCell and DL SCell activation case

Parameter	Unit	Value	Comment
RF Channel Number		1,2,3	Three NR radio channel (1, 2, 3) are used for this test
Active PCell		Cell 1	Primary cell on NR RF channel number 1.
Configured deactivated PUCCH SCell		Cell 2	Configured deactivated PUCCH secondary cell on NR RF channel number 2
Configured deactivated DL SCell		Cell 3	Configured deactivated DL secondary cell on NR RF channel number 3
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
Cell-individual offset for cells on NR channel number	dB	0	Individual offset for cells on primary component carrier.
SCell measurement cycle (measCycleSCell)	ms	160	For both cell 2 and cell 3
Cell2/Cell 3 timing offset to cell1	μs	0	
Time alignment error between cell2 and cell1; cell3 and cell1; cell3 and cell2	μs	≤ Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
T1	s	0.1	During this time the PCell shall be known and the SCell configured and detected.
T2	s	1	During this time the UE shall activate the SCell.
T3	s	1	During this time the UE shall deactivate the SCell.

T_{HARQ}	ms	Config 1: 2 Config 2: 3 Config 3: 2.5	k_1×NR slot length k_1 is a number of slots and is indicated by the PDSCH-to-HARQ-timing-indicator field in the DCI format, if present, or provided by *dl-DataToUL-ACK*, the value of k should be the minimum value defined in TS 38.213 [3] that will meet the timing constraints of this test case.
$T_{CSI_Reporting}$	ms	15	the delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting (clause 5.2.2.5 in TS 38.214) and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2]

Table A.6.5.3.9.1-3: Cell specific test parameters for unknown FR1 PUCCH SCell and DL SCell activation case

Parameter		Unit	Cell 1			Cell 2 and Cell 3		
			T1	T2	T3	T1	T2	T3
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
TDD configuration	Config 1		Not applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
$BW_{channel}$	Config 1,2	MHz	Note 7					
	Config 3		Note 7					
$BW_{occupied}$	Config 1,2	RB	52 Note 5					
	Config 3		106 Note 6					
Initial BWP configuration			DLBWP.0.2					
TCI state			TCI.State.0					
TRS Configuration	Config 1		TRS.1.1 FDD					
	Config 2		TRS.1.1 TDD					
	Config 3		TRS.1.2 TDD					
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD			-		
	Config 2		SR.1.1 TDD			-		
	Config 3		SR.2.1 TDD			-		
Dedicated CORESET parameters	Config 1		CCR.1.1 FDD			-		
	Config 2		CCR.1.1 TDD			-		
	Config 3		CCR.2.1 TDD			-		
RMSI CORESET parameters	Config 1		CR.1.1 FDD			-		
	Config 2		CR.1.1 TDD			-		
	Config 3		CR.2.1 TDD			-		
OCNG Patterns	Config 1,2		OP.1 Note 5					
	Config 3,		OP.1 Note 6					
SSB Configuration	Config 1,2		SSB.1 FR1					
	Config 3		SSB.2 FR1					
CSI-RS configuration for CSI reporting (Note 8)	Config 1		CSI-RS.1.1 FDD					
	Config 2		CSI-RS.1.1 TDD					
	Config 3		CSI-RS.2.1 TDD					
SMTC configuration			SMTC.1					
reportConfigType			periodic					
reportQuantity			cri-RI-PMI-CQI					
CSI reporting periodicity for PCell	Config 1,2	slot	5			-		
	Config 3		10			-		

CSI reporting offset for PCell	Config 1,2	slot	3	-
	Config 3		5	-
CSI reporting periodicity for SCell	Config 1,2	slot	5	5 (on cell 2)
	Config 3		10	10 (on cell 2)
CSI reporting offset for SCell	Config 1,2	slot	2	2 (on cell 2)
	Config 3		4	4 (on cell 2)
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	Config 1,2	dBm/SCS	-104	
	Config 3		-101	
$\hat{E}_s/I_{ot}$		dB	17	
$\hat{E}_s/N_{oc}$		dB	17	
SS-RSRP Note3	Config 1,2	dBm/SCS	-87	
	Config 3		-84	
SCH_RP Note 3		dBm/15 kHz	-87	
Io Note3	Config 1,2	dBm/ 9.36MHz	-58.96	
	Config 3	dBm/ 38.16MHz	-52.87	
Propagation condition		-	AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.

Note 3: SS-RSRP, Io and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.

Note 5: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.

Note 6: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.

Note 7: $N_{RB,c}$. is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.

Note 8: On top of the reference configurations, CSI-RS offset should be set to meet the CSI reference resource timing definition in TS 38.214 cl. 5.2.2.5.

A.6.5.3.9.2 Test Requirements

The test requirements defined in clause A.6.5.3.9.2 shall apply to this test case for PUCCH SCell, except $T_{activation_time}$ will be replaced with the value [TBD] as defined in clause 8.3.13.

The test requirements defined in clause A.6.5.3.3.2 shall apply to this test case for DL SCell, except $T_{activation_time}$ will be replaced with the value [TBD] as defined in clause 8.3.13.

A.6.5.4 UE UL carrier RRC reconfiguration Delay

A.6.5.4.1 UE UL carrier RRC reconfiguration Delay

Table A.6.5.4.1-1 - Table A.6.5.4.1-4 : Void

A.6.5.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that when the UE receives a RRC message implying NR UL or Supplementary UL carrier configuration, the UE shall be ready to start transmission on the newly configured carrier within the time limits specified in clause 8.4.2 and 8.4.3 for configuring and deconfiguring, respectively.

There are two cells: FR1 PCell (cell 1) and FR1 SCell (cell 2). Both NR uplink and supplementary uplink are broadcast by *ServingCellConfigCommonSIB.* The test parameters for PCell and SCell are given in Table A. 6.5.4.1.1-1, Table A.6.5.4.1.1-2, Table A.6.5.4.1.1-3 and Table A.6.5.4.1.1-4 below. In test 1, the test consists of three time periods, with duration of T1, T2 and T3 respectively. During time duration T1, NR uplink of cell 2 is configured to UE. At the start of T2, a supplementary uplink of cell 2 is configured to UE through *RRCReconfiguration*, then UE shall start transmission both on the NR uplink and supplementary uplink. At the start of T3, the supplementary uplink is released through *RRCReconfiguration*.

In test 2, the test consists of three time periods, with duration of T1, T2 and T3 respectively. During time duration T1, supplementray uplink on cell 2 is configured to UE. At the start of T2, a NR uplink is configured to UE through *RRCReconfiguration*, then UE shall start transmission both on the NR uplink and supplementary uplink. At the start of T3, the NR uplink is released through *RRCReconfiguration*.

Table A.6.5.4.1.1-1: Supported test configurations

Configuration	PCell (Cell 1)	SCell (Cell 2)
1	15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode	DL and UL: 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode; SUL: 15 kHz SCS, ≥10 MHz bandwidth, SUL duplex mode
2	15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode	DL and UL: 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode; SUL: 15 kHz SCS, ≥10 MHz bandwidth, SUL duplex mode
3	15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode	DL and UL: 30kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode; SUL: 30kHz SCS, ≥40 MHz bandwidth, SUL duplex mode
4	15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode	DL and UL: 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode; SUL: 15 kHz SCS, ≥10 MHz bandwidth, SUL duplex mode
5	15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode	DL and UL: 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode; SUL: 15 kHz SCS, ≥10 MHz bandwidth, SUL duplex mode
6	15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode	DL and UL: 30kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode; SUL: 30kHz SCS, ≥40 MHz bandwidth, SUL duplex mode
7	30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode	DL and UL: 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode; SUL: 15 kHz SCS, ≥10 MHz bandwidth, SUL duplex mode
8	30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode	DL and UL: 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode; SUL: 15 kHz SCS, ≥10 MHz bandwidth, SUL duplex mode

9	30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode	DL and UL: 30kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode; SUL: 30kHz SCS, ≥40 MHz bandwidth, SUL duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration,		

Table A.6.5.4.1.1-2: General test parameters for NR standalone UE UL carrier RRC reconfiguration Delay on Pcell

Parameter	Unit	Test configuration	Value	Comment
RF Channel Number		Config 1,2,3, 4, 5, 6, 7, 8, 9	1, 2	Two radio channels are used for these two tests.
Active cell		Config 1,2,3, 4, 5, 6, 7, 8, 9	Cell 1: FR1 PCell Cell 2: FR1 SCell	PCell on RF channel number 1 FR1 SCell on RF channel number 2
CP length		Config 1,2,3, 4, 5, 6, 7, 8, 9	Normal	
DRX		Config 1,2,3, 4, 5, 6, 7, 8, 9	OFF	
Measurement gap pattern Id		Config 1,2,3, 4, 5, 6, 7, 8, 9	OFF	
Filter coefficient		Config 1,2,3, 4, 5, 6, 7, 8, 9	0	L3 filtering is not used
T1	s	Config 1,2,3, 4, 5, 6, 7, 8, 9	5	
T2	s	Config 1,2,3, 4, 5, 6, 7, 8, 9	5	
T3	s	Config 1,2,3, 4, 5, 6, 7, 8, 9	5	

Table A.6.5.4.1.1-3: NR Cell specific test parameters for NR standalone UE UL carrier RRC reconfiguration Delay on PCell (Cell 1)

Parameter	Unit	Test Configuration	Test 1			Test 2		
			T1	T2	T3	T1	T2	T3
Channel number		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	1			1		
TDD configuration		Conf 1, 2, 3	N/A			N/A		
		Conf 4, 5, 6	TDD Conf.1.1			TDD Conf.1.1		
		Conf 7, 8, 9	TDD Conf.2.1			TDD Conf.2.1		
$BW_{channel}$	MHz	Conf 1, 2, 3	Note 6			Note 6		
		Conf 4, 5, 6	Note 6			Note 6		
		Conf 7, 8, 9	Note 6			Note 6		
$BW_{occupied}$	RB	Conf 1, 2, 3	52 Note 4			52 Note 4		
		Conf 4, 5, 6	52 Note 4			52 Note 4		
		Conf 7, 8, 9	106 Note 5			106 Note 5		
PDSCH reference measurement channel as defined in A.3.1.1		Conf 1, 2, 3	SR.1.1 FDD			SR.1.1 FDD		
		Conf 4, 5, 6	SR.1.1 TDD			SR.1.1 TDD		
		Conf 7, 8, 9	SR 2.1 TDD			SR 2.1 TDD		
RMSI CORESET reference measurement channel as defined in A.3.1.2		Conf 1, 2, 3	CR.1.1 FDD			CR.1.1 FDD		
		Conf 4, 5, 6	CR.1.1 TDD			CR.1.1 TDD		
		Conf 7, 8, 9	CR.2.1 TDD			CR.2.1 TDD		
RMC CORESET reference measurement channel as defined in A.3.1.3		Conf 1, 2, 3	CCR.1.1 FDD			CCR.1.1 FDD		
		Conf 4, 5, 6	CCR.1.1 TDD			CCR.1.1 TDD		
		Conf 7, 8, 9	CCR.2.1 TDD			CCR.2.1 TDD		
OCNG Pattern Note 1		Conf 1, 2, 3, 4, 5, 6	OP.1 Note 4			OP.1 Note 4		
		Config 7, 8, 9	OP.1 Note 5			OP.1 Note 5		
SSB configuration		Conf 1, 2, 3, 4, 5, 6	SSB.1 FR1			SSB.1 FR1		
		Conf 7, 8, 9	SSB.2 FR1			SSB.2 FR1		
SMTC configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	SMTC.1			SMTC.1		
CSI-RS for tracking		Conf 1	TRS.1.1 FDD			TRS.1.1 FDD		
		Conf 2	TRS.1.1 FDD			TRS.1.1 FDD		
		Conf 3	TRS.1.1 FDD			TRS.1.1 FDD		
		Conf 4	TRS.1.1 TDD			TRS.1.1 TDD		
		Conf 5	TRS.1.1 TDD			TRS.1.1 TDD		
		Conf 6	TRS.1.1 TDD			TRS.1.1 TDD		
		Conf 7	TRS.1.2 TDD			TRS.1.2 TDD		
		Conf 8	TRS.1.2 TDD			TRS.1.2 TDD		
		Conf 9	TRS.1.2 TDD			TRS.1.2 TDD		
DL initial BWP configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	DLBWP.0.1			DLBWP.0.1		
DL dedicated BWP configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	DLBWP.1.1			DLBWP.1.1		

UL dedicated BWP configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	ULBWP.1.1			ULBWP.1.1			
EPRE ratio of PSS to SSS	dB	Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	0			0			
EPRE ratio of PBCH_DMRS to SSS									
EPRE ratio of PBCH to PBCH_DMRS									
EPRE ratio of PDCCH_DMRS to SSS									
EPRE ratio of PDCCH to PDCCH_DMRS									
EPRE ratio of PDSCH_DMRS to SSS									
EPRE ratio of PDSCH to PDSCH_DMRS									
EPRE ratio of OCNG DMRS to SSS									
EPRE ratio of OCNG to OCNG DMRS									
N_{oc} Note 2	dBm / 15kHz	Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	-102			-102			
	dBm/ SCS	Conf 1,2,3,4,5,6	-102			-102			
		Conf 7,8,9	-99			-99			
$\hat{E}_s / N_{oc}$	dB	Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	16	16	16	16	16	16	
$\hat{E}_s / I_{ot}$ Note 3	dB	Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	16	16	16	16	16	16	
SS-RSRP Note 3	dBm/ SCS	Conf 1,2,3,4,5,6	-86	-86	-86	-86	-86	-86	
		Conf 7,8,9	-83	-83	-83	-83	-83	-83	
Io Note 3	dBm/ 9.36 MHz	Conf 1,2,3,4,5,6	-57.9	-57.9	-57.9	-57.9	-57.9	-57.9	
	dBm/ 38.16 MHz	Conf 7,8,9	-51.8	-51.8	-51.8	-51.8	-51.8	-51.8	
Propagation Condition		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	AWGN			AWGN			
Antenna configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	1 x 2			1 x 2			

NOTE 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.
NOTE 3: $\hat{E}_s/I_{ot}$, Io, and SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
NOTE 5: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
NOTE 6: $N_{RB,c}$. is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.

Table A.6.5.4.1.1-4: NR Cell specific test parameters for NR standalone UE UL carrier RRC reconfiguration Delay on SCell (Cell 2)

Parameter	Unit	Test Configuration	Test 1			Test 2		
			T1	T2	T3	T1	T2	T3
Channel number		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	2			2		
TDD configuration		Conf 1, 4, 7	N/A			N/A		
		Conf 2, 5, 8	TDDConf.1.1			TDDConf.1.1		
		Conf 3, 6, 9	TDDConf.2.1			TDDConf.2.1		
$BW_{channel}$	MHz	Conf 1, 4, 7	Note 6			Note 6		
		Conf 2, 5, 8	Note 6			Note 6		
		Conf 3, 6, 9	Note 6			Note 6		
$BW_{occupied}$	RB	Conf 1, 4, 7	52 Note 4			52 Note 4		
		Conf 2, 5, 8	52 Note 4			52 Note 4		
		Conf 3, 6, 9	106 Note 5			106 Note 5		
PUSCH parameters for NR UL carrier		Conf 1, 4, 7	G-FR1-A3-10 in [13]	G-FR1-A3-10 in [13]	G-FR1-A3-10 in [13]	N/A	G-FR1-A3-10 in [13]	N/A
		Conf 2, 5, 8	G-FR1-A3-10 in [13]	G-FR1-A3-10 in [13]	G-FR1-A3-10 in [13]	N/A	G-FR1-A3-10 in [13]	N/A
		Conf 3, 6, 9	G-FR1-A3-14 in [13]	G-FR1-A3-14 in [13]	G-FR1-A3-14 in [13]	N/A	G-FR1-A3-14 in [13]	N/A
PUCCH parameters For NR UL carrier		Conf 1, 4, 7	Table 8.3.3.1.2-1 in [13]	Table 8.3.3.1.2-1 in [13]	Table 8.3.3.1.2-1 in [13]	N/A	N/A	N/A
		Conf 2, 5, 8	Table 8.3.3.1.2-1 in [13]	Table 8.3.3.1.2-1 in [13]	Table 8.3.3.1.2-1 in [13]	N/A	N/A	N/A
		Conf 3, 6, 9	Table 8.3.3.1.2-2 in [13]	Table 8.3.3.1.2-2 in [13]	Table 8.3.3.1.2-2 in [13]	N/A	N/A	N/A
PUSCH parameters for supplementary UL		Conf 1, 4, 7	N/A	G-FR1-A3-10 in [13]	N/A	G-FR1-A3-10 in [13]	G-FR1-A3-10 in [13]	G-FR1-A3-10 in [13]
		Conf 2, 5, 8	N/A	G-FR1-A3-10 in [13]	N/A	G-FR1-A3-10 in [13]	G-FR1-A3-10 in [13]	G-FR1-A3-10 in [13]
		Conf 3, 6, 9	N/A	G-FR1-A3-14 in [13]	N/A	G-FR1-A3-14 in [13]	G-FR1-A3-14 in [13]	G-FR1-A3-14 in [13]
PUCCH parameters for supplementary UL		Conf 1, 4, 7	N/A	N/A	N/A	Table 8.3.3.1.2-1 in [13]	Table 8.3.3.1.2-1 in [13]	Table 8.3.3.1.2-1 in [13]
		Conf 2, 5, 8	N/A	N/A	N/A	Table 8.3.3.1.2-1 in [13]	Table 8.3.3.1.2-1 in [13]	Table 8.3.3.1.2-1 in [13]

		Conf 3, 6, 9	N/A	N/A	N/A	Table 8.3.3.1.2 -2 in [13]	Table 8.3.3.1.2 -2 in [13]	Table 8.3.3.1.2 -2 in [13]
PDSCH reference measurement channel as defined in A.3.1.1		Conf 1, 4, 7	SR.1.1 FDD			SR.1.1 FDD		
		Conf 2, 5, 8	SR.1.1 TDD			SR.1.1 TDD		
		Conf 3, 6, 9	SR 2.1 TDD			SR 2.1 TDD		
RMSI CORESET reference measurement channel as defined in A.3.1.2		Conf 1, 4, 7	CR.1.1 FDD			CR.1.1 FDD		
		Conf 2, 5, 8	CR.1.1 TDD			CR.1.1 TDD		
		Conf 3, 6, 9	CR.2.1 TDD			CR.2.1 TDD		
RMC CORESET reference measurement channel as defined in A.3.1.3		Conf 1, 4, 7	CCR.1.1 FDD			CCR.1.1 FDD		
		Conf 2, 5, 8	CCR.1.1 TDD			CCR.1.1 TDD		
		Conf 3, 6, 9	CCR.2.1 TDD			CCR.2.1 TDD		
OCNG Pattern Note 1		Conf 1, 2, 4, 5, 7, 8	OP.1 Note 4			OP.1 Note 4		
		Conf 3, 6, 9	OP.1 Note 5			OP.1 Note 5		
SSB configuration		Conf 1, 2, 4, 5, 7,8	SSB.1 FR1			SSB.1 FR1		
		Conf 3, 6, 9	SSB.2 FR1			SSB.2 FR1		
SMTC configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	SMTC.1			SMTC.1		
CSI-RS for tracking		Conf 1	TRS.1.1 FDD			TRS.1.1 FDD		
		Conf 2	TRS.1.1 TDD			TRS.1.1 TDD		
		Conf 3	TRS.1.2 TDD			TRS.1.2 TDD		
		Conf 4	TRS.1.1 FDD			TRS.1.1 FDD		
		Conf 5	TRS.1.1 TDD			TRS.1.1 TDD		
		Conf 6	TRS.1.2 TDD			TRS.1.2 TDD		
		Conf 7	TRS.1.1 FDD			TRS.1.1 FDD		
		Conf 8	TRS.1.1 TDD			TRS.1.1 TDD		
		Conf 9	TRS.1.2 TDD			TRS.1.2 TDD		
DL initial BWP configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	DLBWP.0.1			DLBWP.0.1		
DL dedicated BWP configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	DLBWP.1.1			DLBWP.1.1		
UL dedicated BWP configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	ULBWP.1.1			ULBWP.1.1		
EPRE ratio of PSS to SSS	dB	Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	0			0		
EPRE ratio of PBCH_DMRS to SSS								
EPRE ratio of PBCH to PBCH_DMRS								
EPRE ratio of PDCCH_DMRS to SSS								
EPRE ratio of PDCCH to PDCCH_DMRS								

EPRE ratio of PDSCH_DMRS to SSS								
EPRE ratio of PDSCH to PDSCH_DMRS								
EPRE ratio of OCNG DMRS to SSS								
EPRE ratio of OCNG to OCNG DMRS								
N_{oc} Note 2	dBm / 15kHz	Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	-102			-102		
	dBm/ SCS	Conf 1, 2, 4, 5, 7,8	-102			-102		
		Conf 3, 6, 9	-99			-99		
$\hat{E}_s / N_{oc}$	dB	Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	16	16	16	16	16	16
$\hat{E}_s / I_{ot}$ Note 3	dB	Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	16	16	16	16	16	16
SS-RSRP Note 3	dBm/ SCS	Conf 1, 2, 4, 5, 7,8	-86	-86	-86	-86	-86	-86
		Conf 3, 6, 9	-83	-83	-83	-83	-83	-83
Io Note 3	dBm/ 9.36 MHz	Conf 1, 2, 4, 5, 7,8	-57.9	-57.9	-57.9	-57.9	-57.9	-57.9
	dBm/ 38.16 MHz	Conf 3, 6, 9	-51.8	-51.8	-51.8	-51.8	-51.8	-51.8
Propagation Condition		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	AWGN			AWGN		
Antenna configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	1 x 2			1 x 2		

NOTE 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.

NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.

NOTE 3: $\hat{E}_s / I_{ot}$, Io, and SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

NOTE 4: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.

NOTE 5: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.

NOTE 6: $N_{RB,c}$. is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.

A.6.5.4.1.2 Test Requirements

In test 1 the UE shall be ready to start transmission on the supplementary uplink carrier on SCell within 20ms from the start of T2.

In test 1 the UE shall stop the transmission on the supplementary uplink carrier on SCell within 20ms from the start of T3.

In test 2 the UE shall be ready to start transmission on the NR uplink carrier on SCell within 20ms from the start of T2.

In test 2 the UE shall stop the transmission on the NR uplink carrier on SCell within 20ms from the start of T3.

All of the above test requirements shall be fulfilled in order for the observed UE UL carrier configuration delay and UE UL carrier release delay to be counted as correct. The rate of correct observed UE UL carrier configuration delay and UE UL carrier release delay during repeated tests shall be at least 90%.

A.6.5.4.2 Void

A.6.5.5 Beam Failure Detection and Link recovery procedures

A.6.5.5.1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in non-DRX mode

A.6.5.5.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.6.5.5.1.1-1, A.6.5.5.1.1-2, A.6.5.5.1.1-3 and A.6.5.5.1.1-4 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.6.5.5.1.1-1 shows the variation of the downlink SNR of the SSB in set q_0 in the active cell to emulate SSB based beam failure. Figure A.6.5.5.1.1-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test 1.

Table A.6.5.5.1.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30 kHz SSB SCS, 40 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.6.5.5.1.1-2: General test parameters for FR1 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Value	Comment
			Test 1	
Active PSCell			Cell 1	
RF Channel Number			1	
Duplex mode	Config 1		FDD	
	Config 2, 3		TDD	
BWchannel	Config 1	MHz	10: NRB,c = 52	
	Config 2		10: NRB,c = 52	
	Config 3		40: NRB,c = 106	
DL initial BWP configuration	Config 1, 2, 3		DLBWP.0.1	
DL dedicated BWP configuration	Config 1, 2, 3		DLBWP.1.1	
UL initial BWP configuration	Config 1, 2, 3		ULBWP.0.1	

UL dedicated BWP configuration		Config 1, 2, 3		ULBWP.1.1	
TDD Configuration		Config 1		Not Applicable	
		Config 2		TDDConf.1.1	
		Config 3		TDDConf.2.1	
RMSI CORESET Reference Channel		Config 1		CR.1.1 FDD	
		Config 2		CR.1.1 TDD	
		Config 3		CR.2.1 TDD	
Dedicated CORESET Reference Channel		Config 1		CCR.1.1 FDD	
		Config 2		CCR.1.1 TDD	
		Config 3		CCR.2.1 TDD	
SSB Configuration		Config 1		SSB.3 FR1	
		Config 2		SSB.3 FR1	
		Config 3		SSB.4 FR1	
SMTC Configuration		Config 1, 2		SMTC.1	
		Config 3		SMTC.1	
PDSCH/PDCCH subcarrier spacing		Config 1, 2		15 KHz	
		Config 3		30 KHz	
PRACH Configuration		Config 1, 2		Table A.3.8.2.2-1	
		Config 3		Table A.3.8.2.2-1	
SSB Index assigned as BFD RS (q_0)				0	
SSB Index assigned as CBD RS (q_1)				1	
OCNG parameters				OP.1	
CP length				Normal	
Correlation Matrix and Antenna Configuration				2x2 Low	
Beam failure detection transmission parameters	DCI format			1-0	
	Number of Control OFDM symbols			2	
	Aggregation level		CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	0	
	DMRS precoder granularity			REG bundle size	
	REG bundle size			6	
DRX				OFF	
Gap pattern ID				gp0	
gapOffset				0	

rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1, 2	dBm/ SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3		-95	
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see clause 5.17 of TS 38.321 [7]
beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [7]
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD	
	Config 2		CSI-RS.1.1 TDD	
	Config 3		CSI-RS.2.1 TDD	
CSI-RS for tracking	Config 1		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
SSB Index assigned as RLM RS			0, 1	
T310 Timer		ms	1000	
N310			2	
T1		s	0.2	During this time the the UE shall be fully synchronized to cell 1
T2		s	0.37	
T3		s	0.24	
T4		s	0	
T5		s	0.17	
D1		s	0.13	
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.6.5.5.1.1-3: Cell specific test parameters for FR1 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS	dB	0				
EPRE ratio of PDCCH to PDCCH DMRS	dB					
EPRE ratio of PBCH DMRS to SSS	dB					
EPRE ratio of PBCH to PBCH DMRS	dB					
EPRE ratio of PSS to SSS	dB					

EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q_0	Config 1	dB	5	-3	-12	-12	-12
	Config 2		5	-3	-12	-12	-12
	Config 3		5	-3	-12	-12	-12
SNR_SSB of set q_1	Config 1	dB	-10	-10	10	10	10
	Config 2		-10	-10	10	10	10
	Config 3		-10	-10	10	10	10
SSB_RP of set q_1	Config 1	dBm/SCS kHz	-108	-108	-88	-88	-88
	Config 2		-108	-108	-88	-88	-88
	Config 3		-105	-105	-85	-85	-85
N_{oc}	Config 1	dBm/15 KHz	-98				
	Config 2		-98				
	Config 3		-98				
Propagation condition			TDL-C 300ns 100Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.

Table A.6.5.5.1.1-4: Void

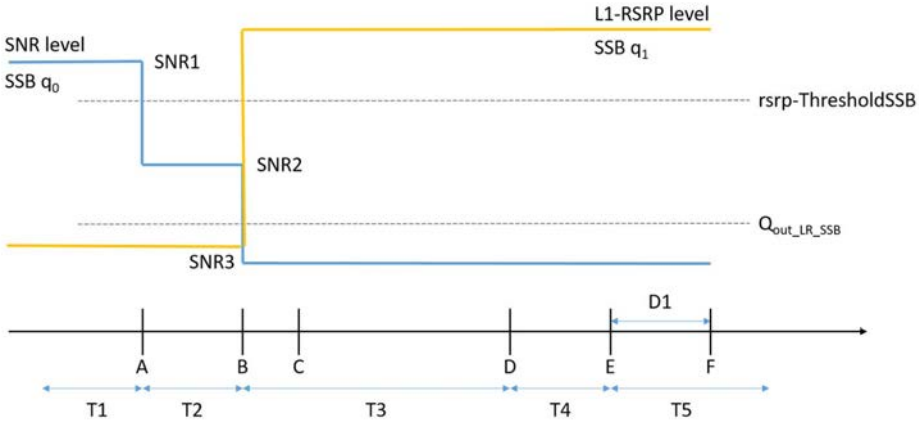

Figure A.6.5.5.1.1-1: SNR and L1-RSRP variation SSB for SSB-based beam failure detection and link recovery testing in non-DRX mode

A.6.5.5.1.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 120+10 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.5.2 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in DRX mode

A.6.5.5.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.6.5.5.2.1-1, A.6.5.5.2.1-2, A.6.5.5.2.1-3, A.6.5.5.2.1-4 and A.6.5.5.2.1-5 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.6.5.5.2.1-1 shows the variation of the downlink SNR of the SSB in set q_0 in the active cell to emulate SSB based beam failure. Figure A.6.5.5.2.1-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.6.5.5.2.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30 kHz SSB SCS, 40 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.6.5.5.2.1-2: General test parameters for FR1 PCell for SSB-based beam failure detection and link recovery testing in DRX mode

Parameter	Unit	Value	Comment
		Test 1	
Active PSCell		Cell 1	
RF Channel Number		1	

Duplex mode		Config 1		FDD	
		Config 2, 3		TDD	
BWchannel		Config 1	MHz	10: NRB,c = 52	
		Config 2		10: NRB,c = 52	
		Config 3		40: NRB,c = 106	
DL initial BWP configuration		Config 1, 2, 3		DLBWP.0.1	
DL dedicated BWP configuration		Config 1, 2, 3		DLBWP.1.1	
UL initial BWP configuration		Config 1, 2, 3		ULBWP.0.1	
UL dedicated BWP configuration		Config 1, 2, 3		ULBWP.1.1	
TDD Configuration		Config 1		Not Applicable	
		Config 2		TDDConf.1.1	
		Config 3		TDDConf.2.1	
RMSI CORESET Reference Channel		Config 1		CR.1.1 FDD	
		Config 2		CR.1.1 TDD	
		Config 3		CR.2.1 TDD	
Dedicated CORESET Reference Channel		Config 1		CCR.1.1 FDD	
		Config 2		CCR.1.1 TDD	
		Config 3		CCR.2.1 TDD	
SSB Configuration		Config 1		SSB.3 FR1	
		Config 2		SSB.3 FR1	
		Config 3		SSB.4 FR1	
SMTC Configuration		Config 1, 2		SMTC.1	
		Config 3		SMTC.1	
PDSCH/PDCCH subcarrier spacing		Config 1, 2		15 KHz	
		Config 3		30 KHz	
PRACH Configuration		Config 1, 2		Table A.3.8.2.2-1	
		Config 3		Table A.3.8.2.2-1	
SSB Index assigned as BFD RS (q_0)				0	
SSB Index assigned as CBD RS (q_1)				1	
OCNG parameters				OP.1	
CP length				Normal	
Correlation Matrix and Antenna Configuration				2x2 Low	
Beam failure detection transmission parameters	DCI format			1-0	
	Number of Control OFDM symbols			2	
	Aggregation level		CCE	8	

	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			DRX.7	A.3.3.7
Gap pattern ID			N.A.	
rlmInSyncOutOfSyncThreshold			Absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1, 2	dBm/ SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3		-95	
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see clause 5.17 of TS 38.321 [7]
beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [7]
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD	
	Config 2		CSI-RS.1.1 TDD	
	Config 3		CSI-RS.2.1 TDD	
CSI-RS for tracking	Config 1		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
SSB Index assigned as RLM RS			0, 1	
T310 Timer		ms	1000	

N310			2	
T1		s	1	During this time the the UE shall be fully synchronized to cell 1
T2		s	5.17	
T3		s	3.24	
T4		s	0	
T5		s	1.97	
D1		s	1.93	
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.6.5.5.2.1-3: Cell specific test parameters for FR1 PCell for SSB-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q_0	Config 1	dB	5	-3	-12	-12	-12
	Config 2		5	-3	-12	-12	-12
	Config 3		5	-3	-12	-12	-12
SNR_SSB of set q_1	Config 1	dB	-10	-10	10	10	10
	Config 2		-10	-10	10	10	10
	Config 3		-10	-10	10	10	10
SSB_RP of set q_1	Config 1	dBm/SCS kHz	-108	-108	-88	-88	-88
	Config 2		-108	-108	-88	-88	-88
	Config 3		-105	-105	-85	-85	-85
N_{oc}	Config 1	dBm/15 KHz	-98				
	Config 2		-98				
	Config 3		-98				
Propagation condition			TDL-C 300ns 100Hz				

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	Void
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.

Table A.6.5.5.2.1-4: Void

Table A.6.5.5.2.1-5: Void

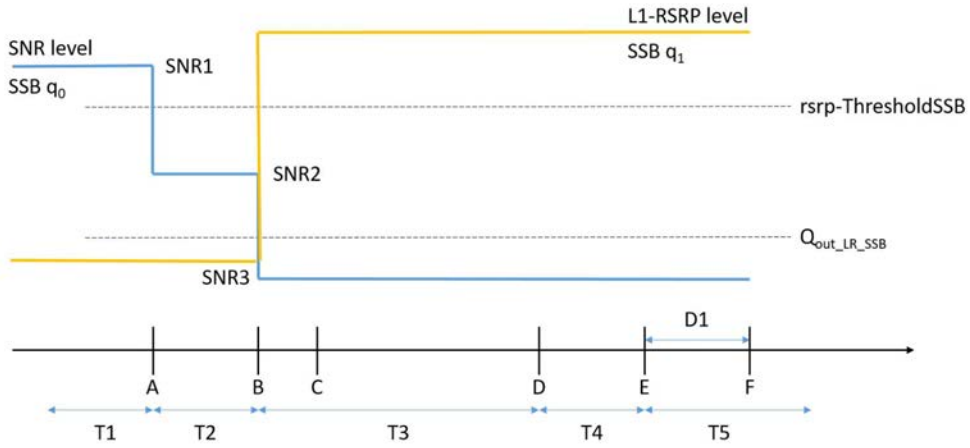

Figure A.6.5.5.2.1-1: SNR and L1-RSRP variation for SSB-based beam failure detection and link recovery testing in non-DRX mode

A.6.5.5.2.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 1920+10 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.5.3 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with CSI-RS-based BFD and LR in non-DRX mode

A.6.5.5.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct CSI-RS-based link recovery based on beam candicate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.6.5.5.3.1-1, A.6.5.5.3.1-2, and below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.6.5.5.3.1-1 shows the variation of the downlink SNR of the CSI-RS in set q_0 in the active cell to emulate CSI-RS based beam failure. Figure A.6.5.5.3.1-1 additionally shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled.

Table A.6.5.5.3.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30 kHz SSB SCS, 40 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.6.5.5.3.1-2: General test parameters for FR1 PCell for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Value	Comment
			Test 1	
Active PCell			Cell 1	
RF Channel Number			1	
Duplex mode	Config 1		FDD	
	Config 2, 3		TDD	
TDD Configuration	Config 1		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	A.3.1.2
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD	A.3.1.3
	Config 2		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD	
SSB Configuration	Config 1		SSB.3 FR1	A.3.10
	Config 2		SSB.3 FR1	

	Config 3		SSB.4 FR1	
SSB Configuration	Config 1		SSB. 3 FR1	A.3.10
	Config 2		SSB. 3 FR1	
	Config 3		SSB. 4 FR1	
SMTC Configuration	Config 1, 2		SMTC.1	A.3.11
	Config 3		SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 KHz	
	Config 3		30 KHz	
PRACH Configuration	Config 1, 2		FR1 PRACH configuration 4	A.3.8.2
	Config 3		FR1 PRACH configuration 4	A.3.8.2
csi-RS-Index assigned as beam failure detection RS in set q_0			0	
OCNG parameters			OP.1	A.3.2.1
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			OFF	
Gap pattern ID			N.A.	
csi-RS-Index assigned as candidate beam detection RS in set q_1			1	N
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1, 2	dBm/SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3		-95	
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see clause 5.17 of TS 38.321 [7]
beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [7]
CSI-RS configuration for q_0 and q_1	Config 1		CSI-RS.1.2 FDD	A.3.14
	Config 2		CSI-RS.1.2 TDD	

	Config 3		CSI-RS.2.2 TDD	
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD	A.3.14
	Config 2		CSI-RS.1.1 TDD	
	Config 3		CSI-RS.2.1 TDD	
TRS configuration	Config 1		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
CSI-RS-Index assigned as RLM RS	Config 1		CSI-RS.1.2 FDD	A.3.14
	Config 2		CSI-RS.1.2 TDD	
	Config 3		CSI-RS.2.2 TDD	
T310 Timer		ms	1000	
N310			2	
T1		s	0.2	During this time the the UE shall be fully synchronized to cell 1
T2		s	0.18	
T3		s	0.14	
T4		s	0	
T5		s	0.08	
D1		s	0.04	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.6.5.5.3.1-3: Cell specific test parameters for FR1 PCell for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set q_0	Config 1	dB	5	-3	-12	-12	-12
	Config 2		5	-3	-12	-12	-12
	Config 3		5	-3	-12	-12	-12
SNR_CSI-RS of set q_1	Config 1	dB	-10	-10	10	10	10
	Config 2		-10	-10	10	10	10
	Config 3		-10	-10	10	10	10
CSI-RS_RP of set q_1	Config 1	dBm/SCS kHz	-108	-108	-88	-88	-88
	Config 2		-108	-108	-88	-88	-88
	Config 3		-105	-105	-85	-85	-85
N_{oc}	Config 1	dBm/15 KHz	-98				
	Config 2		-98				
	Config 3		-98				
Propagation condition			TDL-C 300ns 100Hz				

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	Void
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.

Table A.6.5.5.3.1-4: Void

Table A.6.5.5.3.1-5: Void

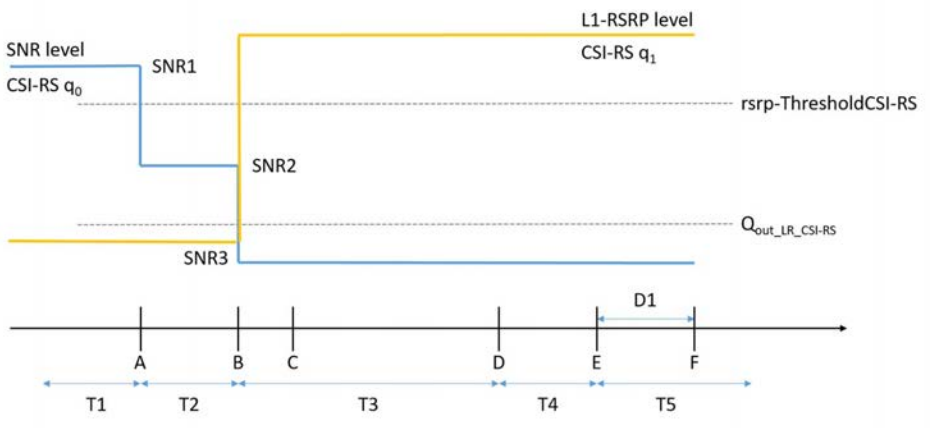

Figure A.6.5.5.3.1-1: SNR and L1-RSRP variation for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

A.6.5.5.3.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the shall detect beam failure and initiat link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 30+10 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.5.4 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with CSI-RS-based BFD and LR in DRX mode

A.6.5.5.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct CSI-RS-based link recovery based on beam candicate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.6.5.5.4.1-1, A.6.5.5.4.1-2, A.6.5.5.4.1-3, and A.6.5.5.4.1-4 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.6.5.5.4.1-1 shows the variation of the downlink SNR of the CSI-RS in set q_0 in the active cell to emulate CSI-RS based beam failure. Figure A.6.5.5.4.1-1 additionally shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.6.5.5.4.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30 kHz SSB SCS, 40 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.6.5.5.4.1-2: General test parameters for FR1 PCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Value	Comment
			Test 1	
Active PCell			Cell 1	
RF Channel Number			1	
Duplex mode	Config 1		FDD	
	Config 2, 3		TDD	
TDD Configuration	Config 1		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf..21	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	A.3.1.2
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD	A.3.1.3
	Config 2		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD	
SSB Configuration	Config 1		SSB. 3 FR1	A.3.10

	Config 2		SSB. 3 FR1	
	Config 3		SSB. 4 FR1	
SMTC Configuration	Config 1, 2		SMTC.1	A.3.11
	Config 3		SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 KHz	
	Config 3		30 KHz	
PRACH Configuration	Config 1, 2		FR1 PRACH configuration 4	A.3.8.2
	Config 3		FR1 PRACH configuration 4	A.3.8.2
csi-RS-Index assigned as beam failure detection RS in set q_0			0	
OCNG parameters			OP.1	A.3.2.1
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			DRX.7	A.3.3.7
Gap pattern ID			N.A.	
csi-RS-Index assigned as candidate beam detection RS in set q_1			1	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1, 2	dBm/SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3		-95	
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see clause 5.17 of TS 38.321 [7]
beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [7]
CSI-RS configuration for q_0 and q_1	Config 1		CSI-RS.1.2 FDD	A.3.14.1
	Config 2		CSI-RS.1.2 TDD	
	Config 3		CSI-RS.2.2 TDD	

CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD	A.3.14.1
	Config 2		CSI-RS.1.1 TDD	
	Config 3		CSI-RS.2.1 TDD	
TRS configuration	Config 1		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
CSI-RS-Index assigned as RLM RS	Config 1		CSI-RS.1.2 FDD	
	Config 2		CSI-RS.1.2 TDD	
	Config 3		CSI-RS.2.2 TDD	
T310 Timer		ms	1000	
N310			2	
T1		s	1	During this time the the UE shall be fully synchronized to cell 1
T2		s	8.37	
T3		s	6.44	
T4		s	0	
T5		s	1.97	
D1		s	1.93	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.6.5.5.4.1-3: Cell specific test parameters for FR1 PCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set q_0	Config 1	dB	5	-3	-12	-12	-12
	Config 2		5	-3	-12	-12	-12
	Config 3		5	-3	-12	-12	-12
SNR_CSI-RS of set q_1	Config 1	dB	-10	-10	10	10	10
	Config 2		-10	-10	10	10	10
	Config 3		-10	-10	10	10	10
CSI-RS_RP of set q_1	Config 1	dB/SCS kHz	-110	-110	-88	-88	-88
	Config 2		-110	-110	-88	-88	-88
	Config 3		-107	-107	-85	-85	-85
N_{oc}	Config 1	dBm/15 KHz	-98				
	Config 2		-98				
	Config 3		-98				
Propagation condition			TDL-C 300ns 100Hz				

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	Void
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.

Table A.6.5.5.4.1-4: Void

Table A.6.5.5.4.1-5: Void

Table A.6.5.5.4.1-6: Void

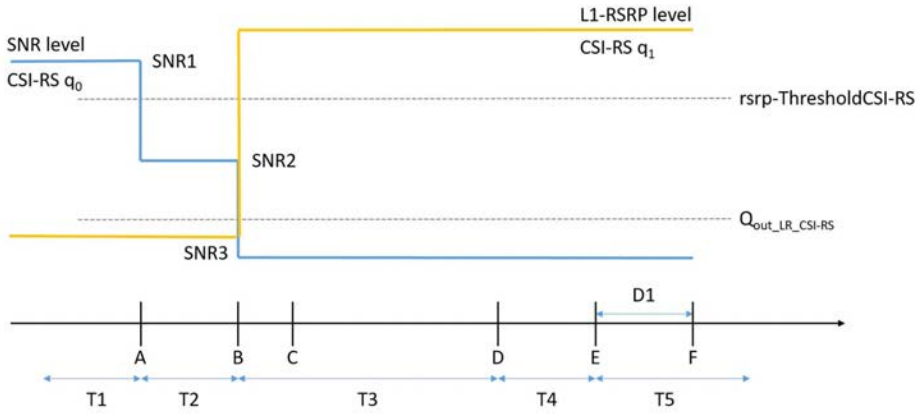

Figure A.6.5.5.4.1-1: SNR and L1-RSRP variation for CSI-RS-based beam failure detection and link recovery testing in DRX mode

A.6.5.5.4.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the shall detect beam failure and initiat link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 1920+10 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.5.5 Beam Failure Detection and Link Recovery Test for FR1 SCell configured with CSI-RS-based BFD and SSB-based LR in non-DRX mode

A.6.5.5.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct SSB-based link recovery based on beam candicate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP without *schedulingRequestID-BFR-SCell-r16* configuration, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.6.5.5.5.1-1, A.6.5.5.5.1-2, and below. There are two cells, cell 1 is the PCell and cell 2 is the SCell, in the test. UE is not provided by *schedulingRequestID-BFR-SCell-r16*, i.e., no configuration for PUCCH transmission resources, and UE shall perform the random access procedure to recover the beam failure. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.6.5.5.5.1-1 shows the SNR of the CSI-RS in set q_0 in the active SCell to emulate beam failure. Figure A.6.5.5.5.1-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled.

Table A.6.5.5.5.1-1: Supported test configurations for FR1 PCell and SCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30 kHz SSB SCS, 40 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.6.5.5.5.1-2: General test parameters for FR1 SCell for beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Value	Comment
			Test 1	
Active PCell			Cell 1	
RF Channel Number for PCell			1	
Active SCell			Cell 2	
RF Channel Number for SCell			2	
Duplex mode	Config 1		FDD	
	Config 2, 3		TDD	
BW channel	Config 1	MHz	10: NRB,c = 52	
	Config 2		10: NRB,c = 52	
	Config 3		40: NRB,c = 106	
TDD Configuration	Config 1		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
CORESET Reference Channel	Config 1		CR.1.1 FDD	A.3.1.2
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
	Config 1		SSB.1 FR1	A.3.10

SSB Configuration	Config 2		SSB.1 FR1	
	Config 3		SSB.2 FR1	
SMTC Configuration	Config 1, 2		SMTC.1	A.3.11
	Config 3		SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1, 2	kHz	15	
	Config 3		30	
PRACH Configuration	Config 1, 2, 4, 5		Table A.3.8.2.2-1	
	Config 3, 6		Table A.3.8.2.2-1	
csi-RS-Index assigned as beam failure detection RS in set q_0 in activated SCell			0	
OCNG parameters			OP.1	A.3.2.1
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			OFF	
Gap pattern ID			N.A.	
schedulingRequestID-BFR-SCell-r16			absent	When the field is absent, the random access procedure will be triggered for SCell BFR
SSB Index assigned as CBD RS (q1) in activated SCell			0	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdBFR	Config 1, 2	dBm/SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3		-95	
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see clause 5.17 of TS 38.321 [7]
beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [7]

CSI-RS configuration for q_0 in activated SCell	Config 1		CSI-RS.1.2 FDD	A.3.14
	Config 2		CSI-RS.1.2 TDD	
	Config 3		CSI-RS.2.2 TDD	
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD	A.3.14
	Config 2		CSI-RS.1.1 TDD	
	Config 3		CSI-RS.2.1 TDD	
TRS configuration	Config 1		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
CSI-RS-Index assigned as RLM RS in PCell	Config 1		CSI-RS.1.2 FDD	A.3.14
	Config 2		CSI-RS.1.2 TDD	
	Config 3		CSI-RS.2.2 TDD	
T310 Timer		ms	1000	
N310			2	
T1		s	0.2	During this time the the UE shall be fully synchronized to cell 1
T2		s	0.18	
T3		s	0.14	
T4		s	0	
T5		s	0.17	
D1		s	0.13	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.6.5.5.5.1-3: Cell specific test parameters for FR1 SCell for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Cell1	Test 1 Cell2				
			T1 to T5	T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB						
EPRE ratio of PBCH DMRS to SSS		dB						
EPRE ratio of PBCH to PBCH DMRS		dB						
EPRE ratio of PSS to SSS		dB						
EPRE ratio of PDSCH DMRS to SSS		dB						
EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
SNR_CSI-RS of set q_0	Config 1	dB	5	5	-3	-12	-12	-12
	Config 2		5	5	-3	-12	-12	-12
	Config 3		5	5	-3	-12	-12	-12
SNR_SSB of set q_1	Config 1	dB	-10	-10	-10	10	10	10
	Config 2		-10	-10	-10	10	10	10
	Config 3		-10	-10	-10	10	10	10

SSB_RP of set q_1	Config 1	dBm/ SCS kHz	-108	-108	-108	-88	-88	-88
	Config 2		-108	-108	-108	-88	-88	-88
	Config 3		-105	-105	-105	-85	-85	-85
N_{oc}	Config 1	dBm/ 15kHz	-98	-98				
	Config 2		-98	-98				
	Config 3		-98	-98				
Propagation condition			TDL-C 300ns 100Hz	TDL-C 300ns 100Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Void
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.

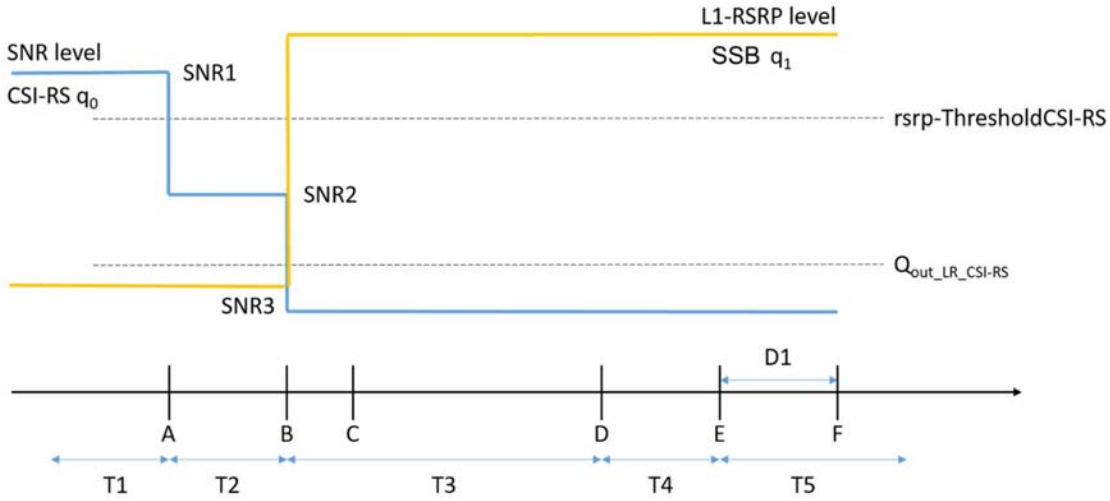

Figure A.6.5.5.5.1-1: SNR and L1-RSRP variation for beam failure detection and link recovery testing in for SCell non-DRX mode

A.6.5.5.5.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the shall detect beam failure and initiat link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 120+10 ms after the start of T5, the UE shall transmit preamble for UL-SCH resource application, followed by MAC-CE on the assigned uplink resources containing a beam associated with the candidate beam set q_1. The UE shall not transmit preamble earlier than time point B.

During T5, the System Simulator shall transmit a Random Access Response to UE after the System Simulator receives the preamble from UE. The UE shall transmit the msg.3 containing candidate beam set q1 for SCell BFR if UE receives the Random Access Response.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.5.6 Beam Failure Detection and Link Recovery Test for FR1 SCell configured with CSI-RS-based BFD and SSB-based LR in DRX mode

A.6.5.5.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct SSB-based link recovery based on beam candicate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP without *schedulingRequestID-BFR-SCell-r16* configuration, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.6.5.5.6.1-1, A.6.5.5.6.1-2, A.6.5.5.6.1-3, and A.6.5.5.6.1-4 below. There are two cells, cell 1 is the PCell and cell 2 is the SCell, in the test. UE is not provided by *schedulingRequestID-BFR-SCell-r16*, i.e., no configuration for PUCCH transmission resources, and UE shall perform the random access procedure to recover the beam failure. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.6.5.5.6.1-1 shows the SNR of the CSI-RS in set q_0 in the active SCell to emulate beam failure. Figure A.6.5.5.6.1-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in SCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.6.5.5.6.1-1: Supported test configurations for FR1 PCell and SCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30 kHz SSB SCS, 40 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.6.5.5.6.1-2: General test parameters for FR1 SCell for beam failure detection and link recovery testing in DRX mode

Parameter	Unit	Value	Comment
		Test 1	
Active PCell		Cell 1	
RF Channel Number for PCell		1	
Active SCell		Cell 2	

RF Channel Number for SCell			2	
Duplex mode	Config 1		FDD	
	Config 2, 3		TDD	
BW channel	Config 1	MHz	10: NRB,c = 52	
	Config 2		10: NRB,c = 52	
	Config 3		40: NRB,c = 106	
TDD Configuration	Config 1		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf..21	
CORESET Reference Channel	Config 1		CR.1.1 FDD	A.3.1.2
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
SSB Configuration	Config 1		SSB.1 FR1	A.3.10
	Config 2		SSB.1 FR1	
	Config 3		SSB.2 FR1	
SMTC Configuration	Config 1, 2		SMTC.1	A.3.11
	Config 3		SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 KHz	
	Config 3		30 KHz	
PRACH Configuration	Config 1, 2, 4, 5		Table A.3.8.2.1-1	
	Config 3, 6		Table A.3.8.2.1-1	
csi-RS-Index assigned as beam failure detection RS in set q_0 in activated SCell			0	
OCNG parameters			OP.1	A.3.2.1
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			DRX.7	A.3.3.7
Gap pattern ID			N.A.	
schedulingRequestID-BFR-SCell-r16			absent	When the field is absent, the random access procedure will be triggered for SCell BFR
SSB Index assigned as CBD RS (q1) in activated SCell			0	

rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdBFR	Config 1, 2	dBm/SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3		-95	
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see clause 5.17 of TS 38.321 [7]
beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [7]
CSI-RS configuration for q_0 in activated SCell	Config 1		CSI-RS.1.2 FDD	A.3.14.1
	Config 2		CSI-RS.1.2 TDD	
	Config 3		CSI-RS.2.2 TDD	
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD	A.3.14.1
	Config 2		CSI-RS.1.1 TDD	
	Config 3		CSI-RS.2.1 TDD	
TRS configuration	Config 1		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
CSI-RS-Index assigned as RLM RS in PCell	Config 1		CSI-RS.1.2 FDD	
	Config 2		CSI-RS.1.2 TDD	
	Config 3		CSI-RS.2.2 TDD	
T310 Timer		ms	1000	
N310			2	
T1		s	1	During this time the the UE shall be fully synchronized to cell 1
T2		s	8.37	
T3		s	6.44	
T4		s	0	
T5		s	1.97	
D1		s	1.93	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.6.5.5.6.1-3: Cell specific test parameters for FR1 SCell for beam failure detection and link recovery testing in DRX mode

Parameter	Unit	Cell 1	Test 1 Cell2				
		T1 to T5	T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS	dB						
EPRE ratio of PDCCH to PDCCH DMRS	dB						
EPRE ratio of PBCH DMRS to SSS	dB				0		
EPRE ratio of PBCH to PBCH DMRS	dB						
EPRE ratio of PSS to SSS	dB	0					

EPRE ratio of PDSCH DMRS to SSS		dB						
EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
SNR_CSI-RS of set q_0	Config 1	dB	5	5	-3	-12	-12	-12
	Config 2	dB	5	5	-3	-12	-12	-12
	Config 3	dB	5	5	-3	-12	-12	-12
SNR_SSB of set q_1	Config 1	dB	-10	-10	-10	10	10	10
	Config 2	dB	-10	-10	-10	10	10	10
	Config 3	dB	-10	-10	-10	10	10	10
SSB_RP of set q_1	Config 1	dBm/ SCS kHz	-108	-108	-108	-88	-88	-88
	Config 2		-108	-108	-108	-88	-88	-88
	Config 3		-105	-105	-105	-85	-85	-85
N_{oc}	Config 1	dBm/15 kHz	-98	-98				
	Config 2		-98	-98				
	Config 3		-98	-98				
Propagation condition			TDL-C 300ns 100Hz	TDL-C 300ns 100Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Void
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.

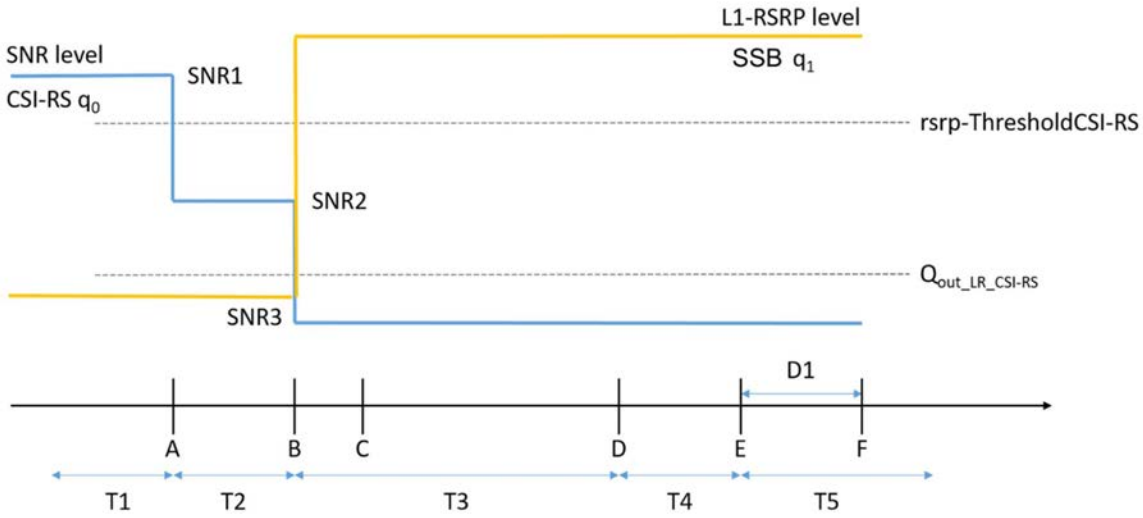

Figure A.6.5.5.6.1-1: SNR and L1-RSRP variation for beam failure detection and link recovery testing for SCell in DRX mode

A.6.5.5.6.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the shall detect beam failure and initiat link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 120+10 ms after the start of T5, the UE shall transmit preamble for UL-SCH resource application, followed by MAC-CE on the assigned uplink resources containing a beam associated with the candidate beam set q_1. The UE shall not transmit preamble earlier than time point B.

During T5, the System Simulator shall transmit a Random Access Response to UE after the System Simulator receives the preamble from UE. The UE shall transmit the msg.3 containing candidate beam set q1 for SCell BFR if UE receives the Random Access Response.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.5.7 TRP Specific Beam Failure Detection and Link Recovery Test for FR1 PCell configured with CSI-RS-based BFD and LR in DRX mode

A.6.5.5.7.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects TRP specific CSI-RS-based beam failure in the sets $q_{0,0}$ and $q_{0,1}$ configured for a serving cell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set $q_{1,0}$ and $q_{1,1}$. The purpose is to test the downlink monitoring for beam failure detection on TRP1 within the UEs active DL BWP, during the evaluation period, and link recovery, when DRX is used. This test will

partly verify the CSI-RS based TRP specific beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.18 with *schedulingRequestID-BFR-r17* configured.

The test parameters are given in Tables A.6.5.5.7.1-1, A.6.5.5.7.1-2, A.6.5.5.7.1-3, and A.6.5.5.7.1-4 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.6.5.5.7.1-1 shows the variation of the downlink SNR of the CSI-RS in set $q_{0,0}$ and $q_{0,1}$ for TRP1 and TRP2 respectively to emulate CSI-RS based beam failure on TRP1. Figure A.6.5.5.7.1-1 additionally shows the variation of the downlink L1-RSRP of the CSI-RS in set $q_{1,0}$ and $q_{1,1}$ of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

Table A.6.5.5.7.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30 kHz SSB SCS, 40 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.6.5.5.7.1-2: General test parameters for FR1 PCell for CSI-RS-based TRP specific beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Value	Comment
			Test1	
Active PCell			Cell 1	
RF Channel Number			1	
Duplex mode	Config 1		FDD	
	Config 2, 3		TDD	
TDD Configuration	Config 1		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	A.3.1.2
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD	A.3.1.3
	Config 2		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD	
SSB Configuration	Config 1		SSB.3 FR1	A.3.10
	Config 2		SSB.3 FR1	
	Config 3		SSB.4 FR1	
SMTC Configuration	Config 1, 2		SMTC.1	A.3.11
	Config 3		SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 KHz	
	Config 3		30 KHz	
PRACH Configuration	Config 1, 2,3		FR1 PRACH configuration 4	A.3.8.2
OCNG parameters			OP.1	A.3.2.1
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
	DCI format		1-0	

Beam failure detection transmission parameters	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			DRX.7	A.3.3.7
Gap pattern ID			N.A.	
schedulingRequestID-BFR- r17			Configured	
Periodicity of PUCCH for SR configuration for BFR on PCell	Config 1	slot	5	5ms
	Config 2, 3		10	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1, 2	dBm/SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3		-95	
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see clause 5.17 of TS 38.321 [7]
beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [7]
CSI-RS configuration for TRP0	Config 1		CSI-RS.1.2 FDD	A.3.14.1
	Config 2		CSI-RS.1.2 TDD	
	Config 3		CSI-RS.2.2 TDD	
CSI-RS configuration for TRP1	Config 1		CSI-RS.1.7 FDD	
	Config 2		CSI-RS.1.6 TDD	
	Config 3		CSI-RS.2.7 TDD	
CSI-RS Index assigned as BFD RS (q0,0)			0	
CSI-RS Index assigned as CBD RS (q1,0)			1	
CSI-RS Index assigned as BFD RS (q0,1)			2	
CSI-RS Index assigned as CBD RS (q1,1)			3	
CSI-RS index assigned as RLM RS			0,1,2,3	
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD	A.3.14.1
	Config 2		CSI-RS.1.1 TDD	
	Config 3		CSI-RS.2.1 TDD	
TRS configuration	Config 1		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
T310 Timer		ms	1000	
N310			2	
T1		s	1	During this time the the UE shall be fully synchronized to cell 1
T2		s	8.37	
T3		s	6.44	

T4	s	0	
T5	s	1.97	
D1	s	1.93	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.6.5.5.7.1-3: Cell specific test parameters for FR1 PCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set $q_{0,0}$	Config 1	dB	5	-3	-12	-12	-12
	Config 2		5	-3	-12	-12	-12
	Config 3		5	-3	-12	-12	-12
SNR_CSI-RS of set $q_{0,1}$	Config 1	dB	5	5	5	5	5
	Config 2		5	5	5	5	5
	Config 3		5	5	5	5	5
SNR_CSI-RS of set $q_{1,0}$	Config 1	dB	0.2	0.2	20.2	20.2	20.2
	Config 2		0.2	0.2	20.2	20.2	20.2
	Config 3		0.2	0.2	20.2	20.2	20.2
CSI-RS_RP of set $q_{1,0}$	Config 1	dB/SCS kHz	-110	-110	-88	-88	-88
	Config 2		-110	-110	-88	-88	-88
	Config 3		-107	-107	-85	-85	-85
N_{oc}	Config 1	dBm/15 KHz	-98				
	Config 2		-98				
	Config 3		-98				
Propagation condition			TDL-C 300ns 100Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Void
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.

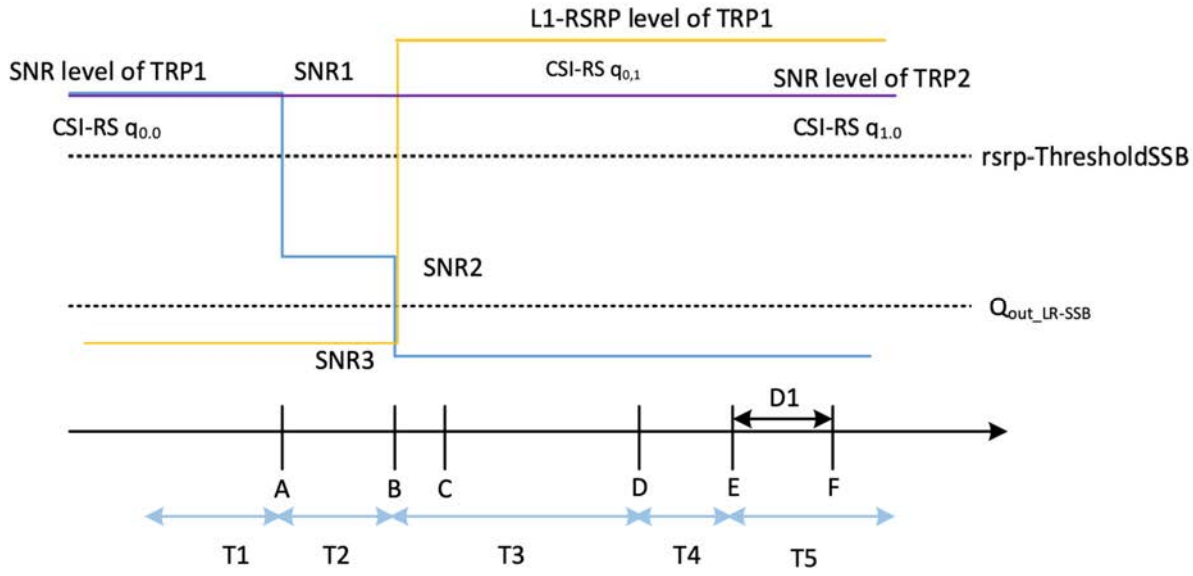

Figure A.6.5.5.7.1-1: SNR and L1-RSRP variation for CSI-RS-based beam failure detection and link recovery testing in DRX mode

A.6.5.5.7.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set $q_{1,0}$.

No later than time point F occurring no later than D1 = 1920+10 ms after the start of T5, the UE shall transmit PUCCH with LRR, followed by BFR MAC CE containing a beam associated with the candidate beam set $q_{1,0}$. The UE shall not transmit PUCCH with an LRR with the candidate beam set $q_{1,0}$ earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.6 Active BWP switch

A.6.5.6.1 DCI-based and Timer-based Active BWP Switch

A.6.5.6.1.1 NR FR1- NR FR1 DL active BWP switch of SCell with non-DRX in SA

A.6.5.6.1.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement defined in clause 8.6, and interruption requirement on other active serving cell defined in clause 8.2.2.2.5.

The supported test configurations for PCell are shown in Table A.6.5.6.1.1.1-1 below. Supported test configurations for NR SCell are shown in table A.6.5.6.1.1.1-1A below. Test configuration for NR PCell and test configuration for NR SCell are chosen independently. The test scenario comprises of one NR PCell (Cell 1) and one SCell (Cell 2) as given in Table A.6.5.6.1.1.1-2. NR Cell-specific parameters are specified in Table A.6.5.6.1.1.1-3 and Table A.6.5.6.1.1.1-4 below.

PDCCHs indicating new transmissions shall be sent continuously on SCell (Cell 2) to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on Cell 2 and the time duration of T2.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), and Cell 2 (SCell) on radio channel 2 (SCC).
- UE is configured with 2 different UE-specific downlink bandwidth parts for SCell, BWP-1 and BWP-2, in Cell 2 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.
- UE is configured with 1 UE-specific downlink bandwidth parts the same as initial BWP for PCell, BWP-0 in Cell 1 before starting the test.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in SCell.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-0 in PCell.
- UE is configured with a *bwp-InactivityTimer* timer value for SCell.

All cells have constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

> Time period T1 starts when a DCI format 1_1 command for SCell DL BWP switch, sent from the test equipment to the UE, is received at the UE side in SCell's slot # denoted *i*. The UE shall switch its bandwidth part from BWP-1 to BWP-2.
>
> The UE shall be able to receive PDSCH no later than the first DL slot that occurs after the beginning of SCell's DL slot ($i+T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the SCell on PCell no later than the first UL slot that occurs after the beginning of slot ($i+T_{BWPswitchDelay}+k1$). The UE shall be continuously scheduled on SCell's BWP-2 no later than the first DL slot that occurs after the beginning of slot ($i+T_{BWPswitchDelay}$).
>
> The starting time of PCell (Cell 1) interruption due to BWP switch on SCell shall occur within the BWP switch delay.

During T2, the test equipment won't transmit DCI format for PDSCH reception on SCell (Cell 2).

During T3,

> The time period T3 starts from the slot #*j*, where j is the first slot of the subframe immediately after *bwp-InactivityTimer* timer expires. The UE should switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1.
>
> The UE shall be able to receive PDSCH no later than the first DL slot that occurs after the beginning of SCell's slot ($j+T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the SCell on PCell at latest on the first UL slot that occurs after the beginning of slot ($j+T_{BWPswitchDelay}+k1$). The UE shall be continuously scheduled on SCell's BWP-1 no later than the first DL slot that occurs after the beginning of slot ($j+T_{BWPswitchDelay}$).

The starting time of PCell (Cell 1) interruption due to BWP switch of SCell shall occur within the BWP switch delay.

The test equipment verifies the DL BWP switch time in SCell by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK/NACK is received.

The test equipment verifies that potential interruption to PCell is carried out in the correct time span by monitoring ACK/NACK sent in PCell during BWP switch of SCell, respectively.

Table A.6.5.6.1.1.1-1: DL BWP switch supported test configurations for NR PCell

Config	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration,	

Table A.6.5.6.1.1.1-1A: DL BWP switch supported test configurations for NR SCell

$Config_{SCell}$	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration,	

Table A.6.5.6.1.1.1-2: General test parameters for DL BWP switch in SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1, 2	Two NR radio channels are used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active SCell		Cell 2	SCell on RF channel number 2.
CP length		Normal	
DRX		OFF	For both PCell and SCell
bwp-InactivityTimer	ms	200	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on SCC.
Cell2 timing offset to cell1	µs	3	Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.
T1	s	0.2	
T2	s	0.2	
T3	s	0.2	

Table A.6.5.6.1.1.1-3: NR Cell specific test parameters for NR PCell for DL BWP switch in SA

Parameter		Unit	Cell 1
Frequency Range			FR1
Duplex mode	Config 1		FDD
	Config 2,3		TDD

TDD configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.1.2
$BW_{channel}$	Config 1,2		Note 7
	Config 3		Note 7
$BW_{occupied}$	Config 1,2	RB	52 Note 5
	Config 3		106 Note 6
Active BWP ID			0
Initial DL BWP Configuration			DLBWP.0.2Note4
Initial UL BWP Configuration			ULBWP.0.2Note4
Active DL BWP-0 Configuration			DLBWP.0.2Note4
Active DL BWP-1 Configuration			N.A.
Active DL BWP-2 Configuration			N.A.
Active UL BWP-0 Configuration			ULBWP.0.2Note4
Active UL BWP-1 Configuration			N.A.
Active UL BWP-2 Configuration			N.A.
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD
	Config 2		SR.1.1 TDD
	Config 3		SR.2.1 TDD
RMSI CORESET parameters	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET parameters	Config 1		CCR.1.2 FDD
	Config 2		CCR.1.2 TDD
	Config 3		CCR.2.4 TDD
TRS Configuration	Config 1		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
OCNG Patterns	Config 1,2		OP.1 Note 5
	Config 3		OP.1 Note 6
SSB Configuration	Config 1,2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTC Configuration			SMTC.1
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note 2	Config 1,2	dBm/SCS	-104
	Config 3		-101
N_{oc} Note 2		dBm/15KHz	-104
SS-RSRP Note 3	Config 1,2	dBm/SCS	-87
	Config 3		-84
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io^{Note3}	Config 1,2	dBm/ 9.36MHz	-58.96

	Config 3	dBm/ 38.16MHz	-52.86
Propagation Condition			AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.
Note 3 SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].
Note 5: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 6: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 7: $N_{RB,c}$. is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.

Table A.6.5.6.1.1.1-4: NR Cell specific test parameters for NR SCell for DL BWP switch in SA

Parameter		Unit	Cell2
Frequency Range			FR1
Duplex mode	$Config_{SCell}$ 1		FDD
	$Config_{SCell}$ 2,3		TDD
TDD configuration	$Config_{SCell}$ 1		Not Applicable
	$Config_{SCell}$ 2		TDDConf.1.1
	$Config_{SCell}$ 3		TDDConf.1.2
$BW_{channel}$	$Config_{SCell}$ 1,2		Note 7
	$Config_{SCell}$ 3		Note 7
$BW_{occupied}$	$Config_{SCell}$ 1,2	RB	52 Note 5
	$Config_{SCell}$ 3		106 Note 6
Active BWP ID			1, 2
Initial DL BWP Configuration			DLBWP.0.2Note4
Initial UL BWP Configuration			N.A.
Active DL BWP-0 Configuration			N.A.
Active DL BWP-1 Configuration			DLBWP.1.1Note4
Active DL BWP-2 Configuration			DLBWP.1.3Note4
Active UL BWP-0 Configuration			N.A.
Active UL BWP-1 Configuration			N.A.
Active UL BWP-2 Configuration			N.A.
PDSCH Reference measurement channel	$Config_{SCell}$ 1		SR.1.1 FDD
	$Config_{SCell}$ 2		SR.1.1 TDD
	$Config_{SCell}$ 3		SR.2.1 TDD
RMSI CORESET parameters	$Config_{SCell}$ 1		CR.1.1 FDD
	$Config_{SCell}$ 2		CR.1.1 TDD
	$Config_{SCell}$ 3		CR.2.1 TDD
Dedicated CORESET parameters	$Config_{SCell}$ 1		CCR.1.2 FDD
	$Config_{SCell}$ 2		CCR.1.2 TDD
	$Config_{SCell}$ 3		CCR.2.4 TDD
TRS Configuration	$Config_{SCell}$ 1		TRS.1.1 FDD
	$Config_{SCell}$ 2		TRS.1.1 TDD
	$Config_{SCell}$ 3		TRS.1.2 TDD
OCNG Patterns	$Config_{SCell}$ 1,2		OP.1 Note 5
	$Config_{SCell}$ 3		OP.1 Note 6
SSB Configuration	$Config_{SCell}$ 1,2		SSB.1 FR1

	$Config_{SCell}$ 3		SSB.2 FR1
SMTC Configuration			SMTC.1
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} Note 2	$Config_{SCell}$ 1,2	dBm/SCS	-104
	$Config_{SCell}$ 3		-101
N_{oc} Note 2		dBm/15KHz	-104
SS-RSRP Note 3	$Config_{SCell}$ 1,2	dBm/SCS	-87
	$Config_{SCell}$ 3		-84
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	$Config_{SCell}$ 1,2	dBm/ 9.36MHz	-58.96
	$Config_{SCell}$ 3	dBm/ 38.16MHz	-52.86
Propagation Condition			AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.
Note 3 SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].
Note 5: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 6: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 7: $N_{RB,c}$. is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.

A.6.5.6.1.1.2 Test Requirements

During T1, the UE shall start to send the ACK/NACK for SCell on PCell from the first UL slot that occurs after the beginning of DL slot ($i+T_{BWPswitchDelay}+k1$).

During T3, the UE shall start to send the ACK/NACK for SCell on PCell from the first UL slot that occurs after the beginning of DL slot ($j+T_{BWPswitchDelay}+k1$).

Where, *k1* is the timing between DL data receiving and acknowledgement as specified in [7].

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 8.6.2-1.

All of the above test requirements shall be fulfilled in order for the observed SCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

During T1 and T3, the start time of PCell interruption during SCell active BWP switch shall not happen outside the BWP switch delay.

The interruption of PCell shall not be longer than the interruption duration specified for active BWP switch in clause 8.2.2.2.5.

All of the above test requirements shall be fulfilled in order for the observed SCell active BWP switch interruption to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK/NACK in the first DL slot that occurs after the beginning of DL slot ($i+ T_{BWPswitchDelay}+k1$), ($j+ T_{BWPswitchDelay}+k1$), then the UE shall use the next available uplink resource for reporting the corresponding ACK/NACK.

A.6.5.6.1.2 NR FR1 DL active BWP switch with non-DRX in SA

A.6.5.6.1.2.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement defined in clause 8.6.

The supported test configurations are shown in Table A.6.5.6.1.2.1-1. The test scenario comprises of one cell (Cell 1) as given in Table A.6.5.6.1.2.1-2. Cell-specific parameters of the cell are specified in Table A.6.5.6.1.2.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on Cell 1 to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 on radio channel 1.
- UE is configured with 2 different UE-specific downlink bandwidth parts, BWP-1 and BWP-2 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1.
- UE is configured with a *bwp-InactivityTimer* timer value for Cell1.

The cell has constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

> Time period T1 starts when a DCI format 1_1 command for DL BWP switch, sent from the test equipment to the UE, is received at the UE side in Cell1's slot # denoted *i*. The UE shall switch its bandwidth part from BWP-1 to BWP-2.
>
> The UE shall be able to receive PDSCH on the first DL slot that occurs after the beginning of Cell1's DL slot ($i+T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the Cell1 no later than the first UL slot that occurs after the beginning of slot ($i+T_{BWPswitchDelay}+k1$). The UE shall be continuously scheduled on Cell1's BWP-2 starting from the first DL slot that occurs after the beginning of slot ($i+T_{BWPswitchDelay}$).

During T2, the test equipment won't transmit DCI format for PDSCH reception on Cell1.

During T3,

> The time period T3 starts from the slot #*j*, where j is the first slot of the subframe immediately after *bwp-InactivityTimer* timer expires. The UE shall switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1.

The UE shall be able to receive PDSCH on the first DL slot that occurs after the beginning of Cell1's slot ($j+T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the Cell1 at latest on the first UL slot that occurs after the beginning of slot ($j+T_{BWPswitchDelay}+k1$). The UE shall be continuously scheduled on Cell1's BWP-1 starting from the first DL slot that occurs after the beginning of slot ($j+T_{BWPswitchDelay}$).

The test equipment verifies the DL BWP switch time by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK/NACK is received.

Table A.6.5.6.1.2.1-1: DL BWP switch supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations. Note 2: A UE which fulfils the requirements in test case A.6.5.6.1.1 can skip the test cases in A.6.5.6.1.2.	

Table A.6.5.6.1.2.1-2: General test parameters for DL BWP switch in SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active Cell		Cell 1	Cell1 on RF channel number 1.
CP length		Normal	
DRX		OFF	
bwp-InactivityTimer	ms	200	
T1	s	0.2	
T2	s	0.2	
T3	s	0.2	

Table A.6.5.6.1.2.1-3: NR Cell specific test parameters for DL BWP switch in SA

Parameter		Unit	Cell 1
Frequency Range			FR1
Duplex mode	Config 1		FDD
	Config 2,3		TDD
TDD configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
$BW_{channel}$	Config 1		10 MHz: $N_{RB,c}$ = 52
	Config 2		10 MHz: $N_{RB,c}$ = 52
	Config 3		40 MHz: $N_{RB,c}$ = 106
Active BWP ID			1, 2
Initial DL BWP Configuration	Config 1,2,3		DLBWP.0.2 Note 4
Active DL BWP-1 Configuration	Config 1,2,3		DLBWP.1.1 Note 4
Active DL BWP-2 Configuration	Config 1,2,3		DLBWP.1.3 Note 4
Initial UL BWP Configuration	Config 1,2,3		ULBWP.0.2 Note 4
Active UL BWP-1 Configuration	Config 1,2,3		ULBWP.1.1 Note 4
Active UL BWP-2 Configuration	Config 1		N/A
	Config 2,3		ULBWP.1.3 Note 4
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD

	Config 2		SR.1.1 TDD
	Config 3		SR.2.1 TDD
RMSI CORESET parameters	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET parameters	Config 1		CCR.1.2 FDD
	Config 2		CCR.1.2 TDD
	Config 3		CCR.2.4 TDD
OCNG Patterns			OP.1
SSB Configuration	Config 1,2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTC Configuration			SMTC.1
Correlation Matrix and Antenna Configuration			1x2 Low
TRS Configuration	Config 1,4		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note 2	Config 1,2	dBm/SCS	-104
	Config 3		-101
N_{oc} Note 2		dBm/15kHz	-104
SS-RSRP Note 3	Config 1,2	dBm/SCS	-87
	Config 3		-84
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	Config 1,2	dBm/ 9.36MHz	-58.96
	Config 3	dBm/ 38.16MHz	-52.86
Propagation Condition			AWGN

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].

A.6.5.6.1.2.2 Test Requirements

During T1, the UE shall start to send the ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot ($i+T_{BWPswitchDelay}+k1$).

During T3, the UE shall start to send the ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot ($j+T_{BWPswitchDelay}+k1$).

Where, *k1* is the timing between DL data receiving and acknowledgement as specified in [7].

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 8.6.2-1.

All of the above test requirements shall be fulfilled in order for the observed Cell1 active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK/NACK in the first UL slot that occurs after beginning of DL slot ($i+T_{BWPswitchDelay}+k1$), ($j+T_{BWPswitchDelay}+k1$), then the UE shall use the next available uplink resource for reporting the corresponding ACK/NACK.

A.6.5.6.2 RRC-based Active BWP Switch

A.6.5.6.2.1 NR FR1 DL active BWP switch of Cell with non-DRX in SA

A.6.5.6.2.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement for RRC-based BWP switch defined in clause 8.6.

The supported test configurations are shown in Table A.6.5.6.2.1.1-1. The test scenario comprises of one Cell (Cell 1) as given in Table A.6.5.6.2.1.1-2. Cell-specific parameters of Cell are specified in Table A.6.5.6.2.1.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on Cell 1 to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 on radio channel 1.
- UE has bandwidth part BWP-1 in its RRC-configuration for Cell 1.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 of initial condition in Cell 1.

All cells have constant signal levels throughout the test.

The test consists of 1 time period, with duration of T1.

During T1,

Time period T1 starts when a *RRCReconfiguration* with updated bandwidth part configuration, sent from the test equipment to the UE, is completely received at the UE side in PCell's slot # denoted *i*. The UE shall reconfigure its bandwidth part with the updated bandwidth part BWP-1 of final condition.

The UE shall be able to receive PDSCH on PCell from the first DL slot that occurs after the beginning of DL slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$ as defined in clause 8.6.3 and starts to report valid ACK/NACK for the PCell from the first UL slot that occurs after the beginning of DL slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$ + k1 on BWP-1 of final condition. The UE shall be continuously scheduled on PCell's BWP-1 of final condition starting from the first DL slot right after slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$.

$T_{RRCprocessingDelay}$ and $T_{BWPswitchDelayRRC}$ are defined in clause 8.6.3.

The test equipment verifies the DL BWP switch time in Cell by counting the time from the time when the RRC Reconfiguration message including updated BWP configuration is sent till the time when a vaild ACK/NACK is received is received.

Table A.6.5.6.2.1.1-1: DL BWP switch supported test configurations in SA scenario

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.6.5.6.2.1.1-2: General test parameters for DL BWP switch in SA scenario

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active Cell		Cell 1	Cell on RF channel number 1.
CP length		Normal	
DRX		OFF	
T1	s	0.2	

Table A.6.5.6.2.1.1-3: NR Cell specific test parameters for DL BWP switch in SA scenario

Parameter			Unit	Cell 1
Frequency Range				FR1
Duplex mode		Config 1		FDD
		Config 2,3		TDD
TDD configuration		Config 1		Not Applicable
		Config 2		TDDConf.1.1
		Config 3		TDDConf.2.1
$BW_{channel}$		Config 1		10 MHz: $N_{RB,c}$ = 52
		Config 2		10 MHz: $N_{RB,c}$ = 52
		Config 3		40 MHz: $N_{RB,c}$ = 106
Active BWP ID				1
Initial DL BWP Configuration		Config 1,2, 3		DLBWP.0.2
Initial UL BWP Configuration		Config 1,2, 3		ULBWP.0.2
Initial Condition	Active DL BWP-1 Configuration	Config 1, 2, 3		DLBWP.1.3
	Active UL BWP-1 Configuration	Config 1, 2, 3		ULBWP.1.3
Final Condition	Active DL BWP-1 Configuration	Config 1, 2, 3		DLBWP.1.1
	Active UL BWP-1 Configuration	Config 1, 2, 3		ULBWP.1.1
PDSCH Reference measurement channel		Config 1		SR.1.1 FDD

	Config 2		SR.1.1 TDD
	Config 3		SR2.1 TDD
RMSI CORESET parameters	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR2.1 TDD
Dedicated CORESET parameters	Config 1		CCR.1.2 FDD
	Config 2		CCR.1.2 TDD
	Config 3		CCR.2.4 TDD
OCNG Patterns			OP.1
SSB Configuration	Config 1,2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTC Configuration			SMTC.1
TRS Configuration	Config 1		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
Antenna Configuration			1x2 Low
Propagation Condition			AWGN
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS(Note 1)			
N_{oc} Note 2	Config 1,2	dBm/SCS	-104
	Config 3		-101
SS-RSRP Note 3	Config 1,2	dBm/SCS	-87
	Config 3		-84
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	Config 1,2	dBm/ 9.36MHz	-58.96
	Config 3	dBm/ 38.16MHz	-52.86

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].

A.6.5.6.2.1.2 Test Requirements

During T1, the UE shall be ready for the reception of uplink grant for the Cell from the first DL slot that occurs right after the begining of slot $i + \frac{T_{\text{RRCprocessingDelay}} + T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$ and starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot $i + \frac{T_{\text{RRCprocessingDelay}} + T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}} + k1$.

Where, *k1* is the timing between DL data receiving and acknowledgement as specified in [7].

All of the above test requirements shall be fulfilled in order for the observed Cell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.6.3 Simultaneous DCI-based and Timer-based Active BWP Switch on multiple CCs

A.6.5.6.3.1 NR FR1- NR FR1 DL active BWP switch on multiple CCs with non-DRX in SA

A.6.5.6.3.1.1 Test Purpose and Environment

The purpose of this test is to verify requirements on the DL BWP switch delay on multiple CCs and interruption requirement for NR victim cell, both defined in clause 8.6.

The supported test configurations for NR PCell are shown in Table A.6.5.6.3.1.1-1 below. The supported test configurations for NR SCells are shown in Table A.6.5.6.3.1.1-1A below. Test configuration for NR PCell and test configuration for NR SCells are chosen independently. Test configuration for two NR SCells are chosen independently. The test scenario comprises of one NR PCell (Cell 1) and two NR SCells (Cell 2 and Cell 3) as given in Table A.6.5.6.3.1.1-2. NR Cell-specific parameters are specified in Table A.6.5.6.3.1.1-3, Table A.6.5.6.3.1.1-4 and Table A.6.5.6.3.1.1-5 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) and SCell (Cell 2) to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on Cell 1 and the time duration of T2.

PDCCHs indicating new transmissions shall be sent continuously on SCell (Cell 3) to ensure that the UE will have ACK/NACK sending.Before the test starts,

- UE is connected to PCell (Cell 1) on radio channel 1 (PCC), and SCell (Cell 2) on radio channel 2 (SCC) and SCell (Cell 3) on radio channel 3(SCC).
- UE is configured with 2 different UE-specific downlink bandwidth parts for PCell and SCell (Cell 2), BWP-1 and BWP-2, in Cell 1 and Cell 2 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.
- UE is configured with a single UE-specific downlink bandwidth part, BWP-0, for SCell (Cell 3). BWP-0 includes the bandwidth of the initial DL BWP and SSB.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in PCell and SCell (Cell 2).
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-0 in SCell (Cell 3).
- UE is configured with a *bwp-InactivityTimer* timer value for PCell and SCell (Cell 2).

All cells have constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

> Time period T1 starts when a DCI format 1_1 command for both PCell and SCell (Cell 2) DL BWP switch, sent from the test equipment to the UE, is received at the UE side in both PCell's and SCell's slot # denoted *i*. The UE shall switch its bandwidth part from BWP-1 to BWP-2 at both PCell and SCell (Cell 2).
>
> The UE shall be able to receive PDSCH no later than the first DL slot that occurs after the beginning of PCell's and SCell (Cell 2)'s DL slot ($i+ T_{MultipleBWPswitchDelay}$) as defined in clause 8.6.2A.1 and starts to report valid ACK/NACK for the both PCell and SCell (Cell 2) no later than the first UL slot that occurs after the beginning of slot ($i+ T_{MultipleBWPswitchDelay} +k1$). The UE shall be continuously scheduled on both PCell's and

SCell (Cell 2)'s BWP-2 no later than the first DL slot that occurs after the beginning of slot ($i+ T_{MultipleBWPswitchDelay}$).

The starting time of SCell (Cell 3) interruption due to BWP switch on PCell and SCell (Cell 2) shall occur within the BWP switch delay.

During T2, the test equipment won't transmit DCI format for PDSCH reception on PCell (Cell 1) and SCell (Cell 2).

During T3,

The time period T3 starts from the slot #*j*, where j is the first slot of the subframe immediately after *bwp-InactivityTimer* timer expires. The UE should switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1 on both PCell and SCell (Cell 2).

The UE shall be able to receive PDSCH no later than the first DL slot that occurs after the beginning of PCell's an SCell (Cell 2)'s slot ($j+ T_{MultipleBWPswitchDelay}$) as defined in clause 8.6.2A.1 and starts to report valid ACK/NACK for the PCell and SCell (Cell 2) no later than the first UL slot that occurs after the beginning of slot ($j+ T_{MultipleBWPswitchDelay} +k1$). The UE shall be continuously scheduled on PCell's and SCell (Cell 2)'s BWP-1 no later than the first DL slot that occurs after the beginning of slot ($j+ T_{MultipleBWPswitchDelay}$).

The starting time of SCell (Cell 3) interruption due to BWP switch of PCell shall occur within the BWP switch delay.

The test equipment verifies the DL BWP switch time in PCell and SCells by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK/NACK is received.

The test equipment verifies that potential interruption to SCell (Cell 3) is carried out in the correct time span by monitoring ACK/NACK sent in SCell (Cell 3) during BWP switch of PCell, respectively.

Table A.6.5.6.3.1.1-1: DL BWP switch supported test configurations for NR PCell

Config	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration	

Table A.6.5.6.3.1.1-1A: DL BWP switch supported test configurations for NR SCells

$Config_{SCell}$	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration Note 3: Test configurations of two NR SCells are selected independently.	

Table A.6.5.6.3.1.1-2: General test parameters for DL BWP switch in SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1, 2	Two NR radio channels are used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active SCell		Cell 2; Cell 3	SCell on RF channel number 2 and number 3.

CP length		Normal	
DRX		OFF	For both PCell and SCells (Cell 2 and Cell 3)
bwp-InactivityTimer	ms	200	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for Cell 1 on SCC.
Cell-individual offset for cells on RF channel number 3	dB	0	Individual offset for Cell 2 on SCC.
Cell2 and Cell 3 timing offset to cell1	µs	3	Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.
T1	s	[0.2]	
T2	s	[0.2]	
T3	s	[0.2]	

Table A.6.5.6.3.1.1-3: NR Cell specific test parameters for NR PCell for DL BWP switch in SA

Parameter		Unit	Cell 1
Frequency Range			FR1
Duplex mode	Config 1		FDD
	Config 2,3		TDD
TDD configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
$BW_{channel}$	Config 1,2		10 MHz: $N_{RB,c}$ = 52
	Config 3		40 MHz: $N_{RB,c}$ = 106
Active BWP ID			1, 2
Initial DL BWP Configuration			DLBWP.0.2[Note4]
Initial UL BWP Configuration			ULBWP.0.2[Note4]
Active DL BWP-0 Configuration			N.A.
Active DL BWP-1 Configuration			DLBWP.1.1[Note4]
Active DL BWP-2 Configuration			DLBWP.1.3[Note4]
Active UL BWP-0 Configuration			N.A.
Active UL BWP-1 Configuration			ULBWP.1.1[Note4]
Active UL BWP-2 Configuration			ULBWP.1.3[Note4]
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD
	Config 2		SR.1.1 TDD
	Config 3		SR.2.1 TDD
RMSI CORESET parameters	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET parameters	Config 1		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
OCNG Patterns			OP.1
SSB Configuration	Config 1,2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTC Configuration			SMTC.1
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			

EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note 2	Config 1,2	dBm/SCS	-104
	Config 3		-101
N_{oc} Note 2		dBm/15KHz	-104
SS-RSRP Note 3	Config 1,2	dBm/SCS	-87
	Config 3		-84
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	Config 1,2	dBm/ 9.36MHz	-58.96
	Config 3	dBm/ 38.16MHz	-52.86
Propagation Condition			AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3 SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].

Table A.6.5.6.3.1.1-4: NR Cell specific test parameters for SCell (NR Cell 2) for DL BWP switch in SA

Parameter		Unit	Cell 2
Frequency Range			FR1
Duplex mode	$Config_{SCell1}$ 1		FDD
	$Config_{SCell1}$ 2,3		TDD
TDD configuration	$Config_{SCell1}$ 1		Not Applicable
	$Config_{SCell1}$ 2		TDDConf.1.1
	$Config_{SCell1}$ 3		TDDConf.2.1
$BW_{channel}$	$Config_{SCell1}$ 1,2		10 MHz: $N_{RB,c}$ = 52
	$Config_{SCell1}$ 3		40 MHz: $N_{RB,c}$ = 106
Active BWP ID			1, 2
Initial DL BWP Configuration			DLBWP.0.2 Note4
Initial UL BWP Configuration			ULBWP.0.2 Note4
Active DL BWP-0 Configuration			N.A.
Active DL BWP-1 Configuration			DLBWP.1.1 Note4
Active DL BWP-2 Configuration			DLBWP.1.3 Note4
Active UL BWP-0 Configuration			N.A.
Active UL BWP-1 Configuration			ULBWP.1.1 Note4
Active UL BWP-2 Configuration			ULBWP.1.3 Note4
PDSCH Reference measurement channel	$Config_{SCell1}$ 1		SR.1.1 FDD
	$Config_{SCell1}$ 2		SR.1.1 TDD
	$Config_{SCell1}$ 3		SR.2.1 TDD
RMSI CORESET parameters	$Config_{SCell1}$ 1		CR.1.1 FDD
	$Config_{SCell1}$ 2		CR.1.1 TDD
	$Config_{SCell1}$ 3		CR.2.1 TDD
Dedicated CORESET parameters	$Config_{SCell1}$ 1		CCR.1.1 FDD
	$Config_{SCell1}$ 2		CCR.1.1 TDD
	$Config_{SCell1}$ 3		CCR.2.1 TDD
OCNG Patterns			OP.1
SSB Configuration	$Config_{SCell1}$ 1,2		SSB.1 FR1

	$Config_{SCell1}$ 3		SSB.2 FR1
SMTC Configuration			SMTC.1
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note 2	$Config_{SCell1}$ 1,2	dBm/SCS	-104
	$Config_{SCell1}$ 3		-101
N_{oc} Note 2		dBm/15KHz	-104
SS-RSRP Note 3	$Config_{SCell1}$ 1,2	dBm/SCS	-87
	$Config_{SCell1}$ 3		-84
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	$Config_{SCell1}$ 1,2	dBm/ 9.36MHz	-58.96
	$Config_{SCell1}$ 3	dBm/ 38.16MHz	-52.86
Propagation Condition			AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3 SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].

Table A.6.5.6.3.1.1-5: NR Cell specific test parameters for SCell (NR Cell 3) for DL BWP switch in SA

Parameter		Unit	Cell 3
Frequency Range			FR1
Duplex mode	$Config_{SCell2}$ 1		FDD
	$Config_{SCell2}$ 2,3		TDD
TDD configuration	$Config_{SCell2}$ 1		Not Applicable
	$Config_{SCell2}$ 2		TDDConf.1.1
	$Config_{SCell2}$ 3		TDDConf.2.1
$BW_{channel}$	$Config_{SCell2}$ 1,2		10 MHz: $N_{RB,c}$ = 52
	$Config_{SCell2}$ 3		40 MHz: $N_{RB,c}$ = 106
Active BWP ID			0
Initial DL BWP Configuration			DLBWP.0.2 Note4
Initial UL BWP Configuration			ULBWP.0.2 Note4
Active DL BWP-0 Configuration			DLBWP.0.2 Note4
Active DL BWP-1 Configuration			N.A.
Active DL BWP-2 Configuration			N.A.
Active UL BWP-0 Configuration			ULBWP.0.2 Note4

Active UL BWP-1 Configuration			N.A.
Active UL BWP-2 Configuration			N.A.
PDSCH Reference measurement channel	$Config_{SCell2}$ 1		SR.1.1 FDD
	$Config_{SCell2}$ 2		SR.1.1 TDD
	$Config_{SCell2}$ 3		SR.2.1 TDD
RMSI CORESET parameters	$Config_{SCell2}$ 1		CR.1.1 FDD
	$Config_{SCell2}$ 2		CR.1.1 TDD
	$Config_{SCell2}$ 3		CR.2.1 TDD
Dedicated CORESET parameters	$Config_{SCell2}$ 1		CCR.1.1 FDD
	$Config_{SCell2}$ 2		CCR.1.1 TDD
	$Config_{SCell2}$ 3		CCR.2.1 TDD
OCNG Patterns			OP.1
SSB Configuration	$Config_{SCell2}$ 1,2		SSB.1 FR1
	$Config_{SCell2}$ 3		SSB.2 FR1
SMTC Configuration			SMTC.1
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note 2	$Config_{SCell2}$ 1,2	dBm/SCS	-104
	$Config_{SCell2}$ 3		-101
N_{oc} Note 2		dBm/15KHz	-104
SS-RSRP Note 3	$Config_{SCell2}$ 1,2	dBm/SCS	-87
	$Config_{SCell2}$ 3		-84
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	$Config_{SCell2}$ 1,2	dBm/ 9.36MHz	-58.96
	$Config_{SCell2}$ 3	dBm/ 38.16MHz	-52.86
Propagation Condition			AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3 SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].

A.6.5.6.3.1.2 Test Requirements

During T1, the UE shall start to send the ACK/NACK for both PCell and SCell (Cell 2) from the first UL slot that occurs after the beginning of DL slot ($i+ T_{MultipleBWPswitchDelay} +k1$).

During T3, the UE shall start to send the ACK/NACK for both PCell and SCell (Cell 2) from the first UL slot that occurs after the beginning of DL slot ($j+ T_{MultipleBWPswitchDelay} +k1$).

Where, *k1* is the timing between DL data receiving and acknowledgement as specified in [7].

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch within the time duration $T_{MultipleBWPswitchDelay}$ defined in 8.6.2A.1.

All of the above test requirements shall be fulfilled in order for the observed Cell1 and Cell2 active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

During T1 and T3, the start time of SCell (Cell 3) interruption during PCell and SCell (Cell 2) active BWP switch shall not happen outside the BWP switch delay.

The interruption of SCell (Cell 3) shall not be longer than the interruption duration specified for active BWP switch in clause 8.2.2.2.5.

All of the above test requirements shall be fulfilled in order for the observed PCell and SCell (Cell 2) active BWP switch interruption to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK/NACK in the first UL slot that occurs after beginning of DL slot ($i+ T_{MultipleBWPswitchDelay} +k1$), ($j+ T_{MultipleBWPswitchDelay} +k1$), then the UE shall use the next available uplink resource for reporting the corresponding ACK/NACK.

A.6.5.6.4 SCell dormancy switch

A.6.5.6.4.1 NR FR1 PCell SCell dormancy switch of single FR1 SCell outside active time

A.6.5.6.4.1.1 Test Purpose and Environment

The purpose of this test is to verify the SCell dormancy switch delay requirements defined in clause 8.6 when the UE is triggered to switch between dormancy to non-dormancy and non-dormancy to dormancy outside the DRX active time. Further the test purpose is to verify the interruption rate on other serving cells when the UE performing CSI and RRM measurements on dormant SCell(s) as defined in clause 8.2.2.2.12 and also to verify the interruption requirement on other active serving cell defined in clause 8.2.2.2.5.

In the test scenario UE is connected to one PCell (Cell 1) in FR1 and one SCell in FR1. In the test the SCell is switched from non-dormancy to dormancy, and vice versa, at a point in time before start of *onDuration.* The UE is configured to monitor PDCCH for DCI format 2_6 at *ps-Offset* before the start of *onDuration.* Two tests are specified, where a UE that only supports triggering within the first three OFDM symbols of a slot shall undergo Test1 only, and a UE that supports triggering also in remaining OFDM symbols of a slot shall undergo both Test1 and Test2. In the tested scenario, *ps-Offset* is selected to correspond to the dormancy switching time specified in clause 8.6.

The supported test configurations for NR PCell are shown in Table A.6.5.6.4.1.1-1, The supported test configurations for NR SCell are shown in Table A.6.5.6.4.1.1-1A. Test configuration for NR PCell and test configuration for NR SCell are chosen independently. The general test parameters are given in Table A.6.5.6.4.1.1-2. NR Cell-specific parameters are specified in Table A.6.5.6.4.1.1-3 and Table A.6.5.6.4.1.1-4.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), and Cell 2 (SCell) on radio channel 2 (SCC).
- UE is configured with 1 UE-specific downlink bandwidth parts the same as initial BWP for PCell, BWP-0 in Cell 1 before starting the test.

- UE is configured with 2 different UE-specific downlink bandwidth parts for SCell, BWP-1 and BWP-2, in Cell 2 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-0 in PCell.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in SCell.
- UE is indicated in *dormantBWP -Id* that the active DL BWP is BWP-2 in the SCell.
- UE is configured with DRX.
- UE is configured to monitor DCI format 2_6, and to be active during *onDuration* even when no DCI format 2_6 is detected (*ps-WakeUp*).

All cells have constant signal levels throughout the test.

The test consists of 4 successive time periods, with durations of T1, T2, T3 and T4, respectively.

During T1,

> Time period T1 starts when a DCI format 2_6 command intended for dormant BWP switch in a SCell from non-dormancy to dormancy, sent from the test equipment to the UE, is received at the UE side in PCell's slot # denoted *i* (at *ps-Offset* before *onDuration*). Upon reception of the PDCCH indicating entering dormant BWP in PCell (i.e. through cross-carrier scheduling), UE shall switch the DL BWP-1 to DL BWP-2 in SCell, i.e., switching from non-dormant BWP to dormant BWP and the UE shall complete the switching before the start of *onDuration*.
>
> The UE shall be able to receive PDCCH on PCell no later than the first DL slot that occurs after the beginning of PCell's DL slot ($i+ T_{dormantBWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK on the PCell no later than the first UL slot that occurs after the beginning of slot ($i+N$) as defined in clause 10.3 in TS38.213. The UE shall be continuously scheduled on PCell's BWP-0 no later than the first DL slot that occurs after the beginning of slot ($i+ T_{dormantBWPswitchDelay}$).
>
> The starting time of PCell (Cell 1) interruption due to dormancy switching on SCell shall occur within the dormant BWP switch delay, i.e. before start of *onDuration*.
>
> The UE shall not transmit signals on SCell after the beginning of PCell's DL slot (i+ TdormantBWPswitchDelay) as defined in clause 8.6. The UE shall not be scheduled on SCells BWP-1 no later than the first DL slot that occurs after the beginning of slot (i+ TdormantBWPswitchDelay).

Time period T2 starts when T1 is completed. During T2, the test equipment continues to schedule the UE continuously in PCell. The UE shall carry out CSI and RRM measurements on the dormant SCells. The UE shall report ACK/NACK in PCell in response to scheduled PDSCH, with the maximum loss of transmitted ACK/NACKs fulfilling the requirement in clause 8.2.2.2.12. The test equipment verifies that the loss of ACK/NACKs is no larger than 1.5%.

Time period T3 starts when T2 is completed. During T3, the test equipment does not schedule the UE, by which the inactivity timer expires and the UE stops monitoring PDCCH except for signalling using DCI format 2_6 at wake-up signalling occasions.

During T4,

> Time period T4 starts when a DCI format 2_6 command for leaving dormant BWP in SCell, sent from the test equipment to the UE, is received at the UE side in PCell's slot # denoted j (at ps-Offset before onDuration). Upon reception of the PDCCH indicating leaving dormant BWP in PCell (i.e. through cross-carrier scheduling), UE shall switch the DL BWP-2 to DL BWP-1 in SCell, i.e., switching from dormant BWP to non-dormant BWP.
>
> The UE shall be able to receive PDSCH on PCell and SCell no later than the first DL slot that occurs after the beginning of PCell's DL slot ($j+ T_{dormantBWPswitchDelay}$) as defined in clause 8.6 and starts to report valid

ACK/NACK on the PCell (for both PCell and SCell) no later than the first UL slot that occurs after the beginning of slot ($j+N$) as defined in clause 10.3 in TS 38.213. The UE shall be continuously scheduled on PCell's BWP-0 no later than the first DL slot that occurs after the beginning of slot ($j+ T_{dormantBWPswitchDelay}$).

The starting time of PCell (Cell 1) interruption due to dormancy switching on SCell shall occur within the dormant BWP switch delay.

The UE shall be ready to transmit signals on SCell no later than the first DL slot that occurs after the beginning of PCell's DL slot (j+ TdormantBWPswitchDelay) as defined in clause 8.6. The UE shall be ready to continuously scheduled on SCell's BWP-1 no later than the first DL slot that occurs after the beginning of slot (j+ TdormantBWPswitchDelay).

The test equipment verifies the DL dormant BWP switch time in SCell by counting the slots from the time when the dormant BWP switch command is received till an ACK/NACK on PCell is received.

The test equipment verifies that potential interruption to PCell is carried out in the correct time span by monitoring ACK/NACK sent in PCell during dormant BWP switch of SCell (i.e. before start of *onDuration*), respectively.

Config	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration	

Table A.6.5.6.4.1.1-1A: SCell dormancy switch supported test configurations for NR SCell

$Config_{SCell}$	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration	

Table A.6.5.6.4.1.1-2: General test parameters for SCell dormancy switch in SA

Parameter	Unit	Value		Comment
		Test 1	Test 2	
NR RF Channel Number		1, 2		Two NR radio channels are used for this test
Active PCell		Cell 1		PCell on RF channel number 1.
Active SCell		Cell 2		SCell on RF channel number 2.
CP length		Normal		
DRX		ON		For both PCell and SCell
Cell-individual offset for cells on RF channel number 1	dB	0		Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0		Individual offset for cells on SCC.
Cell2 timing offset to cell1	µs	3		Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.
OFDM symbol range in slot for transmission of DCI with dormancy indication		0 – 2	3 – 11	
T1	s	0.2		

T2	s	0.2	

Table A.6.5.6.4.1.1-3: NR Cell specific test parameters for NR PCell for SCell dormancy switch in SA

Parameter		Unit	Cell 1
Frequency Range			FR1
Duplex mode	Config 1		FDD
	Config 2,3		TDD
TDD configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
$BW_{channel}$	Config 1,2		10 MHz: $N_{RB,c}$ = 52
	Config 3		40 MHz: $N_{RB,c}$ = 106
Active BWP ID			0
Initial DL BWP Configuration			DLBWP.0.2 Note4
Initial UL BWP Configuration			ULBWP.0.2 Note4
Active DL BWP-0 Configuration			DLBWP.0.2 Note4
Active DL BWP-1 Configuration			N.A.
Active DL BWP-2 Configuration			N.A.
Active UL BWP-0 Configuration			ULBWP.0.2 Note4
Active UL BWP-1 Configuration			N.A.
Active UL BWP-2 Configuration			N.A.
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD
	Config 2		SR.1.1 TDD
	Config 3		SR.2.1 TDD
RMSI CORESET parameters	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET parameters, Test 1	Config 1		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
Dedicated CORESET parameters, Test 2	Config 1		CCR.1.5 FDD
	Config 2		CCR.1.5 TDD
	Config 3		CCR.2.3 TDD
OCNG Patterns			OP.1
SSB Configuration	Config 1,2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTC Configuration			SMTC.1
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note 2	Config 1,2	dBm/SCS	-104
	Config 3		-101
N_{oc} Note 2		dBm/15KHz	-104
SS-RSRP Note 3	Config 1,2	dBm/SCS	-87
	Config 3		-84

$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io[Note3]	Config 1,2	dBm/ 9.36MHz	-58.96
	Config 3	dBm/ 38.16MHz	-52.86
Propagation Condition			AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3 SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].			

Table A.6.5.6.4.1.1-4: NR Cell specific test parameters for NR SCell for SCell dormancy switch in SA

Parameter		Unit	Cell2
Frequency Range			FR1
Duplex mode	$Config_{SCell}$ 1		FDD
	$Config_{SCell}$ 2,3		TDD
TDD configuration	$Config_{SCell}$ 1		Not Applicable
	$Config_{SCell}$ 2		TDDConf.1.1
	$Config_{SCell}$ 3		TDDConf.2.1
$BW_{channel}$	$Config_{SCell}$ 1,2		10 MHz: $N_{RB,c}$ = 52
	$Config_{SCell}$ 3		40 MHz: $N_{RB,c}$ = 106
Active BWP ID			1
Initial DL BWP Configuration			DLBWP.0.2[Note4]
Initial UL BWP Configuration			ULBWP.0.2[Note4]
Active DL BWP-0 Configuration			N.A.
Active DL BWP-1 Configuration			DLBWP.1.1[Note4]
Active DL BWP-2 Configuration			DLBWP.1.3[Note4]
Active UL BWP-0 Configuration			N.A.
Active UL BWP-1 Configuration			ULBWP.1.1[Note4]
Active UL BWP-2 Configuration			ULBWP.1.3[Note4]
PDSCH Reference measurement channel	$Config_{SCell}$ 1		SR.1.1 FDD
	$Config_{SCell}$ 2		SR.1.1 TDD
	$Config_{SCell}$ 3		SR.2.1 TDD
RMSI CORESET parameters	$Config_{SCell}$ 1		CR.1.1 FDD
	$Config_{SCell}$ 2		CR.1.1 TDD
	$Config_{SCell}$ 3		CR.2.1 TDD
Dedicated CORESET parameters, Test 1	$Config_{SCell}$ 1		CCR.1.1 FDD
	$Config_{SCell}$ 2		CCR.1.1 TDD
	$Config_{SCell}$ 3		CCR.2.1 TDD
Dedicated CORESET parameters, Test 2	$Config_{SCell}$ 1		CCR.1.1 FDD
	$Config_{SCell}$ 2		CCR.1.1 TDD
	$Config_{SCell}$ 3		CCR.2.3 TDD
OCNG Patterns			OP.1
SSB Configuration	$Config_{SCell}$ 1,2		SSB.1 FR1
	$Config_{SCell}$ 3		SSB.2 FR1
SMTC Configuration			SMTC.1
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0

EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note 2	$Config_{SCell}$ 1,2	dBm/SCS	-104
	$Config_{SCell}$ 3		-101
N_{oc} Note 2		dBm/15KHz	-104
SS-RSRP Note 3	$Config_{SCell}$ 1,2	dBm/SCS	-87
	$Config_{SCell}$ 3		-84
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	$Config_{SCell}$ 1,2	dBm/ 9.36MHz	-58.96
	$Config_{SCell}$ 3	dBm/ 38.16MHz	-52.86
Propagation Condition			AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3 SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].

A.6.5.6.4.1.2 Test Requirements

During T1, the UE shall start to send the ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot ($i+N$) (i.e. from the start of *onDuration*).

During time period T2, the UE shall transmit ACK/NACKs in response to scheduling in PCell and the rate of missed ACK/NACKs shall be no more than 1.5%.

During T4, the UE shall start to send the ACK/NACK for PCell and SCell from the first UL slot that occurs after the beginning of DL slot ($j+N$) (i.e. from the start of *onDuration*).

Where, N is the timing that UE provide HARQ-ACK information in response to a detection of a DCI format 2_6 indicating SCell dormancy as specified in [3].

All of the above test requirements shall be fulfilled in order for the observed SCell dormant BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

During T1 and T4, the start time of PCell interruption during SCell dormant BWP switch shall not happen outside the dormant BWP switch delay.

The interruption of PCell shall not be longer than the interruption duration specified for dormant BWP switch in clause 8.6.

NOTE: During T1, T4 if there are no uplink resources for reporting the ACK/NACK in the first DL slot that occurs after the beginning of DL slot (*i*+ *N*), (*j*+ *N*), then the UE shall use the next available uplink resource for reporting the corresponding ACK/NACK.

A.6.5.6.4.2 NR FR1 PCell SCell dormancy switch of two FR1 SCells inside active time

A.6.5.6.4.2.1 Test Purpose and Environment

The purpose of this test is to verify fulfillment of SCell dormancy switching delay requirements in clause 8.6.2A, requirements on interruptions due to SCell dormancy switching in clause 8.2.2.2.12.1, and requirements on interruptions due to CSI and RRM measurements on dormant SCells in clauses 8.2.2.2.12.2 and 8.2.2.2.12.3, respectively. In the tested scenario, the UE is connected to PCell and two SCells in FR1, and the SCells are switched from non-dormancy to dormancy, and back, during active time. Depending on UE capability on whether DCI for dormancy switching can be received also later than within the initial three OFDM symbols of a slot, the UE may have to undergo one or two sets of tests. A UE that only supports triggering during within the first three OFDM symbols of a slot shall only undergo Test1 and Test2, whereas a UE that supports triggering also in remaining OFDM symbols of a slot shall undergo Test1 through Test4.

The supported test configurations for NR PCell are provided in Table A.6.5.6.4.2.1-1 below. The supported test configurations for NR SCells are provided in Table A.6.5.6.4.2.1-1A below. Test configuration for NR PCell and test configuration for NR SCells are chosen independently. Test configurations for two NR SCells are chosen independently. General test parameters are provided in Table A.6.5.6.4.2.1-2, and cell-specific parameters are provided in Table A.6.5.6.4.2.1-3, Table A.6.5.6.4.2.1-4 and Table A.6.5.6.4.2.1-5 below.

The tests consist of three consecutive time periods T1, T2, and T3, respectively.

Three carriers are used in the test, each within FR1 and each with one cell. Cell 1 (PCell) is on RF channel 1 (PCC), Cell 2 (SCell1) is on RF channel 2 (SCC1), and Cell 3 (SCell2) is on RF channel 3 (SCC2). All three cells have constant signal levels throughout the test. The UE is continuously scheduled in PCell throughout the test.

Before the test starts,

- UE is connected to Cell 1 (PCell), Cell 2 (SCell1) and Cell 3 (SCell2).
- UE is configured with a single UE-specific downlink bandwidth part, BWP-0, for Cell 1. BWP-0 includes the bandwidth of the initial DL BWP and SSB.
- UE is configured with one non-dormant and one dormant UE-specific downlink bandwidth part, BWP-0 and BWP-1, respectively, for Cell 2 and Cell 3. BWP-0 includes the bandwidth of the initial DL BWP and SSB.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP in Cell 1 is BWP-0.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP in Cell 2 is BWP-0.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP in Cell 3 is BWP-0.
- UE is continuously scheduled in PCell, SCell1 and SCell2.

T1 starts at the point in time at which the UE receives a DCI with dormancy indication on PDCCH in PCell at the antenna connector, in a slot # denoted *m*, pertaining to dormancy indication for switching SCell1 and SCell2 from non-dormancy to dormancy. The UE shall complete switching of the SCells to dormancy by the end of slot *m* + ceil($T_{MultipleBWPswitchDelay}$/NR slot length) + 1 in Test1 and Test2, and slot *m* + ceil($T_{MultipleBWPswitchDelay}$/NR slot length) + 2 in Test3 and Test4, as specified in clause 8.6.2A. Any PCell interruptions due to the switching between non-dormant and dormant BWPs shall fulfill requirements in clause 8.2.2.2.12.1. The test equipment verifies that interruptions due to switching from non-dormancy to dormancy are within the requirements by analysing HARQ feedback transmitted in PCell for PCell.

During T2, the UE is carrying out CSI and RRM measurements on dormant SCell1 and SCell2. Any PCell interruptions due to CSI and RRM measurements shall fulfill requirements in clauses 8.2.2.2.12.2 and 8.2.2.2.12.3, respectively. The test equipment verifies that the interruptions are within the allowed percentages by counting ACK/NACKs in PCell. At the end of T2, the test equipment transmits a DCI with dormancy indication on PDCCH in PCell carrying a dormany indication for switching SCell1 and SCell2 from dormancy to non-dormancy.

T3 starts at the point in time at which the UE receives a DCI with dormancy indication on PDCCH in PCell at the antenna connector, in a slot # denoted *n*, pertaining to dormancy indication for switching SCell1 and SCell2 from dormancy to non-dormancy. The UE shall complete switching of the SCells to non-dormancy by the end of slot n + ceil($T_{MultipleBWPswitchDelay}$/NR slot length) + 1 in Test1 and Test2, and slot n + ceil($T_{MultipleBWPswitchDelay}$/NR slot length) + 2 in Test3 and test4, as specified in clause 8.6.2A. Any PCell interruptions due to the switching between dormant and non-dormant BWPs shall fulfill requirements in clause 8.2.2.2.12.1. The test equipment verifies that interruptions due to switching from dormancy to non-dormancy are within the requirements by analysing HARQ feedback transmitted in PCell for PCell. The test equipment verifies the switching delay by analysing HARQ feedback transmitted in PCell for SCells.

Table A.6.5.6.4.2.1-1: Supported test configurations for NR PCell

Config	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration.	

Table A.6.5.6.4.2.1-1A: Supported test configurations for NR SCells

$Config_{SCell}$	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration. Note 3: Test configurations for two NR SCells are selected independently.	

Table A.6.5.6.4.2.1-2: General test parameters

Parameter	Unit	Value				Comment
		Test1	Test2	Test3	Test4	
NR RF Channel Number		1, 2, 3				Three NR radio channels are used for this test
Active PCell		Cell 1				Primary cell on NR RF channel number 1 in FR1
SCell1		Cell 2				SCell1 on NR RF channel number 2 in FR1
SCell2		Cell 3				SCell2 on NR RF channel number 3 in FR1
CP length		Normal				
DRX		OFF				Continuous monitoring of primary cell
CSI reporting periodicity, Non-dormant BWP	ms	2				CSI reporting periodicity for periodic reporting of CQI for PCell and non-dormant SCells
CSI reporting periodicity, Dormant BWP	ms	40				CSI reporting periodicity for periodic reporting of CQI for dormant SCells
Timing offset between Cell 1 and Cell 2	ns	0				

Timing offset between Cell 1 and Cell 3	ns	0				
Triggering DCI format		1_1	0_1	1_1	0_1	Triggering DCI format for triggering during active time
OFDM symbol range in slot for transmission of DCI with dormancy indication		0 – 2		3 – 11		Test1 and Test3 are based on that triggering DCI is received within the first three OFDM symbols of a slot.Test2 and Test4 are based on that the triggering DCI is received later than within the first three OFDM symbols of a slot.
T1	s	0.2				
T2	s	5				
T3	s	0.2				

Table A.6.5.6.4.2.1-3: NR Cell specific test parameters for NR Pcell

Parameter		Unit	Cell 1
Frequency range			FR1
NR RF channel			1
Duplex mode	Config 1		FDD
	Config 2,3		TDD
TDD configuration	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
$BW_{channel}$	Config 1,2	MHz	10: $N_{RB,c}$ = 52
	Config 3		40: $N_{RB,c}$ = 106
Downlink initial BWP configuration			DLBWP.0.1
Uplink initial BWP configuration			ULBWP.0.1
Downlink active non-dormant BWP-0 configuration			DLBWP.1.1
Downlink active dormant BWP-1 configuration			---
Uplink active BWP-0 configuration			ULBWP.1.1
TCI state			TCI.State.0
CSI-RS configuration for CSI reporting, Non-dormant BWP	Config 1		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
CSI-RS configuration for CSI reporting, Dormant BWP	Config 1		---
	Config 2		
	Config 3		
TRS Configuration	Config 1		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD
	Config 2		SR.1.1 TDD
	Config 3		SR.2.1 TDD
Dedicated CORESET parameters, Test 1,2	Config 1		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
Dedicated CORESET parameters, Test 3,4	Config 1		CCR.1.5 FDD
	Config 2		CCR.1.5 TDD
	Config 3		CCR.2.3 TDD
RMSI CORESET parameters	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
OCNG Pattern			OP.1
SSB Configuration	Config 1,2		SSB.1 FR1
	Config 3		SSB.2 FR1

SMTC configuration			SMTC.1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS Note1			
EPRE ratio of OCNG to OCNG DMRS Note1			
N_{oc} Note2	Config 1,2	dBm/15kHz	-104
	Config 3		-101
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
SS-RSRP Note3	Config 1,2	dBm/SCS	-87
	Config 3		-84
Io Note3	Config 1,2	dBm/9.36 MHz	-59.0
	Config 3	dBm/38.16 MHz	-52.9
Propagation condition			AWGN
Correlation Matrix and Antenna Configuration			1x2 Low

Note 1: OCNG shall be used such that the cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP, SCH_RP, and Io levels have been derived from other parameters for information purpose. They are not settable parameters themselves.

Table A.6.5.6.4.2.1-4: NR Cell specific test parameters for NR SCell (Cell 2)

Parameter		Unit	Cell 2
Frequency range			FR1
NR RF channel			2
Duplex mode	$Config_{SCell1}$ 1		FDD
	$Config_{SCell1}$ 2,3		TDD
TDD configuration	$Config_{SCell1}$ 2		TDDConf.1.1
	$Config_{SCell1}$ 3		TDDConf.2.1
$BW_{channel}$	$Config_{SCell1}$ 1,2	MHz	10: $N_{RB,c}$ = 52
	$Config_{SCell1}$ 3		40: $N_{RB,c}$ = 106
Downlink initial BWP configuration			DLBWP.0.1
Uplink initial BWP configuration			N/A
Downlink active non-dormant BWP-0 configuration			DLBWP.1.1
Downlink active dormant BWP-1 configuration			DLBWP.1.1
Uplink active BWP-0 configuration			N/A
TCI state			TCI.State.0
CSI-RS configuration for CSI reporting, Non-dormant BWP	$Config_{SCell1}$ 1		CSI-RS.1.1 FDD
	$Config_{SCell1}$ 2		CSI-RS.1.1 TDD
	$Config_{SCell1}$ 3		CSI-RS.2.1 TDD
CSI-RS configuration for CSI reporting, Dormant BWP	$Config_{SCell1}$ 1		CSI-RS.1.6 FDD
	$Config_{SCell1}$ 2		CSI-RS.1.5 TDD
	$Config_{SCell1}$ 3		CSI-RS.2.6 TDD

TRS Configuration	$Config_{SCell1}$ 1		TRS.1.1 FDD
	$Config_{SCell1}$ 2		TRS.1.1 TDD
	$Config_{SCell1}$ 3		TRS.1.2 TDD
PDSCH Reference measurement channel	$Config_{SCell1}$ 1		SR.1.1 FDD
	$Config_{SCell1}$ 2		SR.1.1 TDD
	$Config_{SCell1}$ 3		SR.2.1 TDD
Dedicated CORESET parameters, Test 1,2	$Config_{SCell1}$ 1		CCR.1.1 FDD
	$Config_{SCell1}$ 2		CCR.1.1 TDD
	$Config_{SCell1}$ 3		CCR.2.1 TDD
Dedicated CORESET parameters, Test 3,4	$Config_{SCell1}$ 1		CCR.1.1 FDD
	$Config_{SCell1}$ 2		CCR.1.1 TDD
	$Config_{SCell1}$ 3		CCR.2.1 TDD
RMSI CORESET parameters	$Config_{SCell1}$ 1		N/A
	$Config_{SCell1}$ 2		
	$Config_{SCell1}$ 3		
OCNG Pattern			OP.1
SSB Configuration	$Config_{SCell1}$ 1,2		SSB.1 FR1
	$Config_{SCell1}$ 3		SSB.2 FR1
SMTC configuration			SMTC.1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS Note1			
EPRE ratio of OCNG to OCNG DMRS Note1			
N_{oc} Note2	$Config_{SCell1}$ 1,2	dBm/15kHz	-104
	$Config_{SCell1}$ 3		-101
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
SS-RSRP Note3	$Config_{SCell1}$ 1,2	dBm/SCS	-87
	$Config_{SCell1}$ 3		-84
Io Note3	$Config_{SCell1}$ 1,2	dBm/9.36 MHz	-59.0
	$Config_{SCell1}$ 3	dBm/38.16 MHz	-52.9
Propagation condition			AWGN
Correlation Matrix and Antenna Configuration			1x2 Low

Note 1: OCNG shall be used such that the cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP, SCH_RP, and Io levels have been derived from other parameters for information purpose. They are not settable parameters themselves.

Table A.6.5.6.4.2.1-5: NR Cell specific test parameters for NR SCell (Cell 3)

Parameter		Unit	Cell 3
Frequency range			FR1
NR RF channel			3
Duplex mode	$Config_{SCell2}$ 1		FDD
	$Config_{SCell2}$ 2,3		TDD

TDD configuration	$Config_{SCell2}$ 2		TDDConf.1.1
	$Config_{SCell2}$ 3		TDDConf.2.1
$BW_{channel}$	$Config_{SCell2}$ 1,2	MHz	10: $N_{RB,c}$ = 52
	$Config_{SCell2}$ 3		40: $N_{RB,c}$ = 106
Downlink initial BWP configuration			DLBWP.0.1
Uplink initial BWP configuration			N/A
Downlink active non-dormant BWP-0 configuration			DLBWP.1.1
Downlink active dormant BWP-1 configuration			DLBWP.1.1
Uplink active BWP-0 configuration			N/A
TCI state			TCI.State.0
CSI-RS configuration for CSI reporting, Non-dormant BWP	$Config_{SCell2}$ 1		CSI-RS.1.1 FDD
	$Config_{SCell2}$ 2		CSI-RS.1.1 TDD
	$Config_{SCell2}$ 3		CSI-RS.2.1 TDD
CSI-RS configuration for CSI reporting, Dormant BWP	$Config_{SCell2}$ 1		CSI-RS.1.6 FDD
	$Config_{SCell2}$ 2		CSI-RS.1.5 TDD
	$Config_{SCell2}$ 3		CSI-RS.2.6 TDD
TRS Configuration	$Config_{SCell2}$ 1		TRS.1.1 FDD
	$Config_{SCell2}$ 2		TRS.1.1 TDD
	$Config_{SCell2}$ 3		TRS.1.2 TDD
PDSCH Reference measurement channel	$Config_{SCell2}$ 1		SR.1.1 FDD
	$Config_{SCell2}$ 2		SR.1.1 TDD
	$Config_{SCell2}$ 3		SR.2.1 TDD
Dedicated CORESET parameters, Test 1,2	$Config_{SCell2}$ 1		CCR.1.1 FDD
	$Config_{SCell2}$ 2		CCR.1.1 TDD
	$Config_{SCell2}$ 3		CCR.2.1 TDD
Dedicated CORESET parameters, Test 3,4	$Config_{SCell2}$ 1		CCR.1.1 FDD
	$Config_{SCell2}$ 2		CCR.1.1 TDD
	$Config_{SCell2}$ 3		CCR.2.1 TDD
RMSI CORESET parameters	$Config_{SCell2}$ 1		N/A
	$Config_{SCell2}$ 2		
	$Config_{SCell2}$ 3		
OCNG Pattern			OP.1
SSB Configuration	$Config_{SCell2}$ 1,2		SSB.1 FR1
	$Config_{SCell2}$ 3		SSB.2 FR1
SMTC configuration			SMTC.1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS Note1			
EPRE ratio of OCNG to OCNG DMRS Note1			
N_{oc} Note2	$Config_{SCell2}$ 1,2	dBm/15kHz	-104
	$Config_{SCell2}$ 3		-101
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
SS-RSRP Note3	$Config_{SCell2}$ 1,2	dBm/SCS	-87
	$Config_{SCell2}$ 3		-84
Io Note3	$Config_{SCell2}$ 1,2	dBm/9.36 MHz	-59.0
	$Config_{SCell2}$ 3	dBm/38.16 MHz	-52.9
Propagation condition			AWGN

Correlation Matrix and Antenna Configuration		1x2 Low
Note 1: OCNG shall be used such that the cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP, SCH_RP, and Io levels have been derived from other parameters for information purpose. They are not settable parameters themselves.		

A.6.5.6.4.2.2 Test Requirements

During T1, any interruption on PCell due to dormancy switching of SCells shall be within the requirement specified in clause 8.2.2.2.12.1.

During T2, interruptions on PCell due to CSI and RRM measurements on dormant SCells shall be within the interruption rate requirements specified in clauses 8.2.2.2.12.2 and 8.2.2.2.12.3, respectively.

During T3, any interruption on PCell due to dormancy switching of SCells shall be within the requirement specified in clause 8.2.2.2.12.1. Monitoring of PDCCH for SCell in SCell shall be resumed within the dormancy switching time specified in clause 8.6.2A.

For an event to be considered to be correct, all requirements above have to be fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.6.5 Simultaneous RRC-based Active BWP Switch on multiple CCs

A.6.5.6.5.1 NR FR1- NR FR1 DL active BWP switch on multiple CCs with non-DRX in SA

A.6.5.6.5.1.1 Test Purpose and Environment

The purpose of this test is to verify requirements on the RRC-based DL BWP switch delay on multiple CCs defined in clause 8.6.

The supported test configurations for NR PCell are shown in Table A.6.5.6.5.1.1-1 below. The supported test configurations for NR SCell are shown in Table A.6.5.6.5.1.1-1A below. Test configuration for NR PCell and test configuration for NR SCell are chosen independently. The test scenario comprises of one NR PCell (Cell 1) and one NR SCell (Cell 2) as given in Table A.6.5.6.5.1.1-2. NR Cell-specific parameters are specified in Table A.6.5.6.5.1.1-3 and A.6.5.6.5.1.1-4 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) and SCell (Cell 2) to ensure that the UE would have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), Cell 2 (SCell) on radio channel 2 (SCC).
- UE has bandwidth part BWP-1 in its RRC-configuration for PCell and SCell (Cell 2).
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 of initial condition in PCell and SCell (Cell 2).

All cells have constant signal levels throughout the test.

The test consists of 1 time period, with duration of T1.

During T1,

Time period T1 starts when a *RRCReconfiguration* with updated bandwidth part configuration for both PCell and SCell (Cell 2), sent from the test equipment to the UE, is completely received at the UE side in PCell's and SCell's slot # denoted *i*. The UE shall reconfigure its bandwidth part with the updated bandwidth part BWP-1 of final condition for both PCell and SCell (Cell 2).

The UE shall be able to receive PDSCH on PCell and SCell (Cell 2) from the first DL slot that occurs after the beginning of DL slot i + $\frac{T_{RRCprocessingDelay}+T_{BWPswitchDelayRRC}+D_{RRC}}{NR\ slot\ length}$ as defined in clause 8.6.3A.1 and starts to report valid ACK/NACK for the PCell and SCell (Cell 2) from the first UL slot that occurs after the beginning of DL slot i + $\frac{T_{RRCprocessingDelay}+T_{BWPswitchDelayRRC}+D_{RRC}}{NR\ slot\ length}$ + k1 on BWP-1 of final condition. The UE shall be continuously scheduled on PCell's and SCell (Cell 2)'s BWP-1 of final condition starting from the first DL slot right after slot i + $\frac{T_{RRCprocessingDelay}+T_{BWPswitchDelayRRC}+D_{RRC}}{NR\ slot\ length}$.

$T_{RRCprocessingDelay}$, $T_{BWPswitchDelayRRC}$ and D_{RRC} are defined in clause 8.6.3A.1, N=2 in this test case.

The test equipment verifies the DL BWP switch time in PCell and SCell by counting the slots from the time when the RRC Reconfiguration message including updated BWP configuration is sent till the time when a vaild ACK/NACK is received.

Table A.6.5.6.5.1.1-1: DL BWP switch supported test configurations for NR PCell

Config	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration	

Table A.6.5.6.5.1.1-1A: DL BWP switch supported test configurations for NR SCell

$Config_{SCell}$	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration	

Table A.6.5.6.5.1.1-2: General test parameters for DL BWP switch in SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1, 2	Two NR radio channels are used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active SCell		Cell 2	SCell on RF channel number 2.
CP length		Normal	
DRX		OFF	For both PCell and SCell (Cell 2)
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cell on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cell on SCC.
Cell 2 timing offset to Cell 1	µs	3	Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.
T1	s	[0.2]	

Table A.6.5.6.5.1.1-3: NR Cell specific test parameters for NR PCell for DL BWP switch in SA

Parameter			Unit	Cell 1
Frequency Range				FR1
Duplex mode		Config 1		FDD
		Config 2,3		TDD
TDD configuration		Config 1		Not Applicable
		Config 2		TDDConf.1.1
		Config 3		TDDConf.2.1
$BW_{channel}$		Config 1,2		10 MHz: $N_{RB,c}$ = 52
		Config 3		40 MHz: $N_{RB,c}$ = 106
Active BWP ID				1
Initial DL BWP Configuration				DLBWP.0.2 Note4
Initial UL BWP Configuration				ULBWP.0.2 Note4
Initial Condition	Active DL BWP-1 Configuration			DLBWP.1.3 Note4
	Active UL BWP-1 Configuration			ULBWP.1.3 Note4
Final Condition	Active DL BWP-1 Configuration			DLBWP.1.1 Note4
	Active UL BWP-1 Configuration			ULBWP.1.1 Note4
PDSCH Reference measurement channel		Config 1		SR.1.1 FDD
		Config 2		SR.1.1 TDD
		Config 3		SR.2.1 TDD
RMSI CORESET parameters		Config 1		CR.1.1 FDD
		Config 2		CR.1.1 TDD
		Config 3		CR.2.1 TDD
Dedicated CORESET parameters		Config 1		CCR.1.1 FDD
		Config 2		CCR.1.1 TDD
		Config 3		CCR.2.1 TDD
OCNG Patterns				OP.1
SSB Configuration		Config 1,2		SSB.1 FR1
		Config 3		SSB.2 FR1
SMTC Configuration				SMTC.1
TRS Configuration		Config 1		TRS.1.1 FDD
		Config 2		TRS.1.1 TDD
		Config 3		TRS.1.2 TDD
Correlation Matrix and Antenna Configuration				1x2 Low
Propagation Condition				AWGN
EPRE ratio of PSS to SSS			dB	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note 2		Config 1,2	dBm/SCS	-104
		Config 3		-101
SS-RSRP Note 3		Config 1,2	dBm/SCS	-87
		Config 3		-84
$\hat{E}_s/I_{ot}$			dB	17
$\hat{E}_s/N_{oc}$			dB	17
Io Note3		Config 1,2	dBm/ 9.36MHz	-58.96
		Config 3	dBm/ 38.16MHz	-52.86

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].

Table A.6.5.6.5.1.1-4: NR Cell specific test parameters for NR SCell for DL BWP switch in SA

Parameter			Unit	Cell 2
Frequency Range				FR1
Duplex mode		$Config_{SCell}$ 1		FDD
		$Config_{SCell}$ 2,3		TDD
TDD configuration		$Config_{SCell}$ 1		Not Applicable
		$Config_{SCell}$ 2		TDDConf.1.1
		$Config_{SCell}$ 3		TDDConf.2.1
$BW_{channel}$		$Config_{SCell}$ 1,2		10 MHz: $N_{RB,c}$ = 52
		$Config_{SCell}$ 3		40 MHz: $N_{RB,c}$ = 106
Active BWP ID				1
Initial DL BWP Configuration				DLBWP.0.2 Note4
Initial UL BWP Configuration				ULBWP.0.2 Note4
Initial Condition	Active DL BWP-1 Configuration			DLBWP.1.3 Note4
	Active UL BWP-1 Configuration			ULBWP.1.3 Note4
Final Condition	Active DL BWP-1 Configuration			DLBWP.1.1 Note4
	Active UL BWP-1 Configuration			ULBWP.1.1 Note4
PDSCH Reference measurement channel		$Config_{SCell}$ 1		SR.1.1 FDD
		$Config_{SCell}$ 2		SR.1.1 TDD
		$Config_{SCell}$ 3		SR.2.1 TDD
RMSI CORESET parameters		$Config_{SCell}$ 1		CR.1.1 FDD
		$Config_{SCell}$ 2		CR.1.1 TDD
		$Config_{SCell}$ 3		CR.2.1 TDD
Dedicated CORESET parameters		$Config_{SCell}$ 1		CCR.1.1 FDD
		$Config_{SCell}$ 2		CCR.1.1 TDD
		$Config_{SCell}$ 3		CCR.2.1 TDD
OCNG Patterns				OP.1
SSB Configuration		$Config_{SCell}$ 1,2		SSB.1 FR1
		$Config_{SCell}$ 3		SSB.2 FR1
SMTC Configuration				SMTC.1
TRS Configuration		$Config_{SCell}$ 1		TRS.1.1 FDD
		$Config_{SCell}$ 2		TRS.1.1 TDD
		$Config_{SCell}$ 3		TRS.1.2 TDD
Correlation Matrix and Antenna Configuration				1x2 Low
Propagation Condition				AWGN
EPRE ratio of PSS to SSS			dB	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				

EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note 2	$Config_{SCell}$ 1,2	dBm/SCS	-104
	$Config_{SCell}$ 3		-101
SS-RSRP Note 3	$Config_{SCell}$ 1,2	dBm/SCS	-87
	$Config_{SCell}$ 3		-84
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	$Config_{SCell}$ 1,2	dBm/ 9.36MHz	-58.96
	$Config_{SCell}$ 3	dBm/ 38.16MHz	-52.86

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3 SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].

A.6.5.6.5.1.2 Test Requirements

During T1, the UE shall be ready for the reception of uplink grant for both PCell and SCell (Cell 2) from the first DL slot that occurs right after the begining of slot ($i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC} + D_{RRC}}{NR\ slot\ length}$) and starts to report valid ACK/NACK for both PCell and SCell (Cell 2) from the first UL slot that occurs after the beginning of DL slot ($i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC} + D_{RRC}}{NR\ slot\ length} + k1$).

Where, *k1* is the timing between DL data receiving and acknowledgement as specified in [7].

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch on PCell and SCell (Cell 2) within the time duration $T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC} + D_{RRC}$ defined in 8.6.3A.1.

All of the above test requirements shall be fulfilled in order for the observed PCell and SCell (Cell 2) active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1 if there are no uplink resources for reporting the ACK/NACK in the first UL slot that occurs after beginning of DL slot ($i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC} + D_{RRC}}{NR\ slot\ length} + k1$), then the UE shall use the next available uplink resource for reporting the corresponding ACK/NACK.

A.6.5.7 DL interruptions at switching between two uplink carriers

A.6.5.7.1 DL interruptions at switching between two uplink carriers in FDD-TDD CA

A.6.5.7.1.1 Test Purpose and Environment

The purpose of this test is to verify DL interruption requirements during UE dynamic switching between two uplink carriers defined in clause 8.2.2.2.10. The test case is applicable for an uplink band pair of an inter-band FDD-TDD CA configuration when the capability *uplinkTxSwitchingPeriod* is present.

There are two cells: FR1 FDD PCell (Cell 1), FR1 TDD SCell (Cell 2). The test parameters for the two cells are given in Table A.6.5.7.1.1-1, Table A.6.5.7.1.1-2 and Table A.6.5.7.1.1-3 below.

For NR FDD carrier (Cell 1), aperiodic CSI-RS for L1-RSRP reporting is triggered with power boosting 6dB on the following symbol in the slot overlapping with the special slot of the NR TDD carrier (Cell 2):

symbol#12 if UE does not report uplinkTxSwitching-DL-Interruption-r16;

otherwise,

symbol #8 if UE capability *uplinkTxSwitchingPeriod* is 210us or

symbol #9 if UE capability *uplinkTxSwitchingPeriod* is 140us or

symbol #10 if UE capability *uplinkTxSwitchingPeriod* is 35us.

For NR TDD carrier (Cell 2), aperiodic CSI-RS for L1-RSRP reporting is configured with power boosting 6dB on the following symbol in the special slot:

symbol#10 if UE does not report uplinkTxSwitching-DL-Interruption-r16;

otherwise,

symbol #4 if UE capability *uplinkTxSwitchingPeriod* is 210us or

symbol #5 if UE capability *uplinkTxSwitchingPeriod* is 140us or

symbol #8 if UE capability *uplinkTxSwitchingPeriod* is 35us.

This test verifies that the UE correctly report the L1-RSRP reporting. The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, *uplinkTxSwitching* is indicated to UE.

Table A.6.5.7.1.1-1: Supported test configurations

Configuration	Description
1	NR Cell 1: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode NR Cell 2: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Table A.6.5.7.1.1-2: General test parameters for DL interruptions at switching between two uplink carriers in FDD-TDD CA

Parameter	Unit	Test configuration	Value	Comment
RF Channel Number		Config 1	1, 2	Two radio channels are used for this test.
Active cell		Config 1	Cell 1: FR1 PCell Cell 2: FR1 SCell	FR1 PCell on RF channel number 1 FR1 SCell on RF channel number 2
CP length		Config 1	Normal	
DRX		Config 1	OFF	
Measurement gap pattern Id		Config 1	OFF	
Filter coefficient		Config 1	0	L3 filtering is not used
CSI-RS configuration for L1-RSRP reporting		Config 1	Cell 1: CSI-RS.1.5 FDD Cell 2: CSI-RS.2.5 TDD	
T1	s	Config 1	5	

Table A.6.5.7.1.1-3: Cell specific test parameters for DL interruptions at switching between two uplink carriers in FDD-TDD CA

Parameter	Unit	Cell1	Cell2

Frequency Range			FR1	FR1
Duplex mode	Config 1		FDD	TDD
TDD configuration	Config 1		N/A	TDDConf.2.1 except that: S='11DL: 1GP:2UL'; *nrofDownlinkSymbols: 11 nrofUplinkSymbols: 2*
$BW_{channel}$	Config 1		10 MHz: $N_{RB,c}$ = 52	40 MHz: $N_{RB,c}$ = 106
Initial BWP Configuration	Config 1		DLBWP.0.1	DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.1	DLBWP.1.1
UL dedicated BWP configuration	Config 1		ULBWP.1.1	ULBWP.1.1
SRS configuration	Config 1		SRS configuration in Table A.4.4.1.1.1-3 is applied except that: resourceMappingstartPosition: 0resourceMappingnrofSymbols: n2	SRS configuration in Table A.4.4.1.1.1-3 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrofSymbols: n2
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	SR.2.1 TDD
RMSI CORESET parameters	Config 1		CR.1.1 FDD	CR.2.1 TDD
Dedicated CORESET parameters	Config 1		CCR.1.1 FDD	CCR.2.1 TDD
OCNG Patterns			OP.1	OP.1
SMTC Configuration			SMTC.1	SMTC.1
SSB Configuration	Config 1		SSB.1 FR1	SSB.2 FR1
Correlation Matrix and Antenna Configuration			1x2 Low	2x2 Low
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note 2		dBm/15 kHz	-104	-104
SS-RSRP Note 3		dBm/SSB SCS	-87	-84
CSI-RS RSRP Note6		dBm/SCS	-81	-78
$\hat{E}_s/I_{ot}$		dB	17	17
$\hat{E}_s/N_{oc}$		dB	17	17
N_{oc} Note 2	Config 1	dBm/SCS	-104	-101
Io Note3 on symbols without CSI-RS	Config 1	dBm/9.36 MHz	-58.96	-
		dBm/ 38.16MHz	-	-52.86
Io Note6 on symbols with CSI-RS	Config 1	dBm/9.36 MHz	-56.58	-
		dBm/ 38.16MHz	-	-50.5
Time offset to Cell1 Note 5		µs	-	0

Propagation Condition		AWGN	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Void
Note 5: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.
Note 6: CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.5.7.1.2 Test Requirements

The UE behaviour follows the requirements defined in clause 8.2.2.2.10.

UE shall send L1-RSRP report while meeting the accuracy requirements defined in clause 10.1.19.2.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.7.2 DL interruptions at switching between two uplink carriers in TDD-TDD CA

A.6.5.7.2.1 Test Purpose and Environment

The purpose of this test is to verify DL interruption requirements during UE dynamic switching between two uplink carriers defined in clause 8.2.2.2.10. The test case is applicable for an uplink band pair of an inter-band TDD-TDD CA configuration when the capability *uplinkTxSwitchingPeriod* is present.

There are two cells: FR1 TDD PCell (Cell 1), FR1 TDD SCell (Cell 2). The test parameters for the two cells are given in Table A.6.5.7.2.1-1, Table A.6.5.7.2.1-2 and Table A.6.5.7.2.1-3 below.

For NR TDD PCell (Cell 1), aperiodic CSI-RS for L1-RSRP reporting is triggered with power boosting [6dB] on the following symbol in the special

slot:symbol#10 if UE does not report uplinkTxSwitching-DL-Interruption-r16;

otherwise,

symbol #4 if UE capability *uplinkTxSwitchingPeriod* is 210us or

symbol #5 if UE capability *uplinkTxSwitchingPeriod* is 140us or

symbol #8 if UE capability *uplinkTxSwitchingPeriod* is 35us.

For NR TDD SCell (Cell 2), aperiodic CSI-RS for L1-RSRP reporting is configured with power boosting [6dB] on the following symbol on the 2nd special slot of every 8 slots:

symbol#10 if UE does not report uplinkTxSwitching-DL-Interruption-r16;

otherwise,

symbol #4 if UE capability *uplinkTxSwitchingPeriod* is 210us or

symbol #5 if UE capability *uplinkTxSwitchingPeriod* is 140us or

symbol #8 if UE capability *uplinkTxSwitchingPeriod* is 35us.

This test verifies that the UE correctly report the L1-RSRP reporting. The test case is only applicable to UE which supports *simultaneousRxTxInterBandCA.*

The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, *uplinkTxSwitching* is indicated to UE.

Table A.6.5.7.2.1-1: Supported test configurations

Configuration	Description
1	NR Cell 1: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR Cell 2: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Table A.6.5.7.2.1-2: General test parameters for DL interruptions at switching between two uplink carriers in TDD-TDD CA

Parameter	Unit	Test configuration	Value	Comment
RF Channel Number		Config 1	1, 2	Two radio channels are used for this test.
Active cell		Config 1	Cell 1: FR1 PCell Cell 2: FR1 SCell	FR1 PCell on RF channel number 1 FR1 SCell on RF channel number 2
CP length		Config 1	Normal	
DRX		Config 1	OFF	
Measurement gap pattern Id		Config 1	OFF	
Filter coefficient		Config 1	0	L3 filtering is not used
CSI-RS configuration for L1-RSRP reporting		Config 1	Cell 1: CSI-RS.2.5 TDD Cell 2: CSI-RS.2.5 TDD	
T1	s	Config 1	5	

Table A.6.5.7.2.1-3: Cell specific test parameters for DL interruptions at switching between two uplink carriers in TDD-TDD CA

Parameter		Unit	Cell1	Cell2
Frequency Range			FR1	FR1
Duplex mode	Config 1		TDD	TDD
TDD configuration	Config 1		TDDConf.2.1 except that S='1 1DL: :2UL'; *nrofDownlinkSymbols: 11* *nrofUplinkSymbols: 2*	TDDConf.2.2
$BW_{channel}$	Config 1		40 MHz: $N_{RB,c}$ = 106	40 MHz: $N_{RB,c}$ = 106
Initial BWP Configuration	Config 1		DLBWP.0.1	DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.1	DLBWP.1.1
UL dedicated BWP configuration	Config 1		ULBWP.1.1	ULBWP.1.1
SRS configuration	Config 1		SRS configuration in Table A.4.4.1.1.1-3 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrofSymbols: n2	SRS configuration in Table A.4.4.1.1.1-3 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrofSymbols: n2
PDSCH Reference measurement channel	Config 1		SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET parameters	Config 1		CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET parameters	Config 1		CCR.2.1 TDD	CCR.2.1 TDD
OCNG Patterns			OP.1	OP.1

SMTC Configuration			SMTC.1	SMTC.1
SSB Configuration	Config 1		SSB.2 FR1	SSB.2 FR1
Correlation Matrix and Antenna Configuration			1x2 Low	2x2 Low
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note 2		dBm/15 kHz	-104	-104
SS-RSRP Note 3		dBm/SSB SCS	84	-84
CSI-RS RSRP Note6		dBm/SCS	-78	-78
$\hat{E}_s/I_{ot}$		dB	17	17
$\hat{E}_s/N_{oc}$		dB	17	17
N_{oc} Note 2	Config 1	dBm/SCS	-104	-101
Io Note3 on symbols without CSI-RS	Config 1	dBm/ 38.16MHz	-52.86	-52.86
Io Note6 on symbols with CSI-RS	Config 1	dBm/ 38.16MHz	-50.5	-50.5
Time offset to Cell1 Note 5		µs	-	0
Propagation Condition			AWGN	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Void
Note 5: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.
Note 6: CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.5.7.2.2 Test Requirements

The UE behaviour follows the requirements defined in clause 8.2.2.2.10.

UE shall send L1-RSRP report while meeting the accuracy requirements defined in clause 10.1.19.2.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.7A DL interruptions at switching between two uplink carriers with two transmit antenna connectors

A.6.5.7A.1 DL interruptions at switching between two uplink carriers in FDD-TDD CA

A.6.5.7A.1.1 Test Purpose and Environment

The purpose of this test is to verify DL interruption requirements during UE dynamic switching between two uplink carriers defined in clause 8.2.2.2.10A. The test case is applicable for an uplink band pair of an inter-band FDD-TDD CA configuration when the capability *uplinkTxSwitchingPeriod2T2T* is present, where NR UL carrier 1 is capable of two transmit antenna connectors and NR UL carrier 2 is capable of two transmit antenna connectors, and the two uplink carriers are in different bands with different carrier frequencies.

There are two cells: FR1 FDD PCell (Cell 1), FR1 TDD SCell (Cell 2). The test parameters for the two cells are given in Table A.6.5.7A.1.1-1, Table A.6.5.7A.1.1-2 and Table A.6.5.7A.1.1-3 below.

For NR FDD carrier (Cell 1), aperiodic CSI-RS for L1-RSRP reporting is triggered with power boosting [6dB] on the following symbol in the slot overlapping with the special slot of the NR TDD carrier (Cell 2):

- symbol#12 if UE does not report uplinkTxSwitching-DL-Interruption-r16;
- otherwise,
  - symbol #8 if UE capability *uplinkTxSwitchingPeriod2T2T* is 210us or
  - symbol #9 if UE capability *uplinkTxSwitchingPeriod2T2T* is 140us or
  - symbol #10 if UE capability *uplinkTxSwitchingPeriod2T2T* is 35us.

For NR TDD carrier (Cell 2), aperiodic CSI-RS for L1-RSRP reporting is configured with power boosting [6dB] on the following symbol in the special slot:

- symbol#10 if UE does not report uplinkTxSwitching-DL-Interruption-r16;
- otherwise,
  - symbol #4 if UE capability *uplinkTxSwitchingPeriod2T2T* is 210us or
  - symbol #5 if UE capability *uplinkTxSwitchingPeriod2T2T* is 140us or
  - symbol #8 if UE capability *uplinkTxSwitchingPeriod2T2T* is 35us.

This test verifies that the UE correctly report the L1-RSRP reporting. The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, *uplinkTxSwitching* is indicated to UE.

Table A.6.5.7A.1.1-1: Supported test configurations

Configuration	Description
1	NR Cell 1: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode NR Cell 2: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Table A.6.5.7A.1.1-2: General test parameters for DL interruptions at switching between two uplink carriers in FDD-TDD CA

Parameter	Unit	Test configuration	Value	Comment
RF Channel Number		Config 1	1, 2	Two radio channels are used for this test.

Active cell		Config 1	Cell 1: FR1 PCell Cell 2: FR1 SCell	FR1 PCell on RF channel number 1 FR1 SCell on RF channel number 2
CP length		Config 1	Normal	
DRX		Config 1	OFF	
Measurement gap pattern Id		Config 1	OFF	
Filter coefficient		Config 1	0	L3 filtering is not used
CSI-RS configuration for L1-RSRP reporting		Config 1	Cell 1: CSI-RS.1.5 FDD Cell 2: CSI-RS.2.5 TDD	
T1	s	Config 1	5	

Table A.6.5.7A.1.1-3: Cell specific test parameters for DL interruptions at switching between two uplink carriers in FDD-TDD CA

Parameter		Unit	Cell1	Cell2
Frequency Range			FR1	FR1
Duplex mode	Config 1		FDD	TDD
TDD configuration	Config 1		N/A	TDDConf.2.1 except that: S='11DL: 1GP:2UL'; *nrofDownlinkSymbols: 11* *nrofUplinkSymbols: 2*
$BW_{channel}$	Config 1		10 MHz: $N_{RB,c}$ = 52	40 MHz: $N_{RB,c}$ = 106
Initial BWP Configuration	Config 1		DLBWP.0.1	DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.1	DLBWP.1.1
UL dedicated BWP configuration	Config 1		ULBWP.1.1	ULBWP.1.1
SRS configuration	Config 1		SRSConf.1 in Table A.4.4.1.1.1-3 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrofSymbols: n2	SRSConf.1 in Table A.4.4.1.1.1-3 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrofSymbols: n2
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	SR.2.1 TDD
RMSI CORESET parameters	Config 1		CR.1.1 FDD	CR.2.1 TDD
Dedicated CORESET parameters	Config 1		CCR.1.1 FDD	CCR.2.1 TDD
OCNG Patterns			OP.1	OP.1
SMTC Configuration			SMTC.1	SMTC.1
SSB Configuration	Config 1		SSB.1 FR1	SSB.2 FR1
Correlation Matrix and Antenna Configuration			2x2 Low	2x2 Low
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note 2		dBm/15 kHz	-104	-104

SS-RSRP Note 3		dBm/SCS	-87	-84
$\hat{E}_s/I_{ot}$		dB	17	17
$\hat{E}_s/N_{oc}$		dB	17	17
N_{oc} Note 2	Config 1	dBm/SCS	-104	-101
Io Note3	Config 1	dBm/9.36 MHz	-58.96	-
		dBm/ 38.16MHz	-	-52.86
Time offset to Cell1 Note 5		µs	-	0
Propagation Condition			AWGN	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Void
Note 5: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.

A.6.5.7A.1.2 Test Requirements

The UE behaviour follows the requirements defined in clause 8.2.2.2.10A.

UE shall send L1-RSRP report while meeting the accuracy requirements defined in clause 10.1.19.2.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.7A.2 DL interruptions at switching between two uplink carriers in TDD-TDD CA

A.6.5.7A.2.1 Test Purpose and Environment

The purpose of this test is to verify DL interruption requirements during UE dynamic switching between two uplink carriers defined in clause 8.2.2.2.10A. The test case is applicable for an uplink band pair of an inter-band TDD-TDD CA configuration when the capability *uplinkTxSwitchingPeriod2T2T* is present, where NR UL carrier 1 is capable of two transmit antenna connectors and NR UL carrier 2 is capable of two transmit antenna connectors, and the two uplink carriers are in different bands with different carrier frequencies.

There are two cells: FR1 TDD PCell (Cell 1), FR1 TDD SCell (Cell 2). The test parameters for the two cells are given in Table A.6.5.7A.2.1-1, Table A.6.5.7A.2.1-2 and Table A.6.5.7A.2.1-3 below.

For NR TDD PCell (Cell 1), aperiodic CSI-RS for L1-RSRP reporting is triggered with power boosting [6dB] on the following symbol in the special slot:

- symbol#10 if UE does not report uplinkTxSwitching-DL-Interruption-r16;
- otherwise,
  - symbol #4 if UE capability *uplinkTxSwitchingPeriod2T2T* is 210us or
  - -s ymbol #5 if UE capability *uplinkTxSwitchingPeriod2T2T* is 140us or
  - symbol #8 if UE capability *uplinkTxSwitchingPeriod2T2T* is 35us.

For NR TDD SCell (Cell 2), aperiodic CSI-RS for L1-RSRP reporting is configured with power boosting [6dB] on the following symbol on the 2nd special slot of every 8 slots:

- symbol#10 if UE does not report uplinkTxSwitching-DL-Interruption-r16;

- otherwise,
  - symbol #4 if UE capability *uplinkTxSwitchingPeriod2T2T* is 210us or
  - symbol #5 if UE capability *uplinkTxSwitchingPeriod2T2T* is 140us or
  - symbol #8 if UE capability *uplinkTxSwitchingPeriod2T2T* is 35us.

This test verifies that the UE correctly report the L1-RSRP reporting. The test case is only applicable to UE which supports *simultaneousRxTxInterBandCA.*

The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, *uplinkTxSwitching* is indicated to UE.

Table A.6.5.7A.2.1-1: Supported test configurations

Configuration	Description
1	NR Cell 1: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR Cell 2: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Table A.6.5.7A.2.1-2: General test parameters for DL interruptions at switching between two uplink carriers in TDD-TDD CA

Parameter	Unit	Test configuration	Value	Comment
RF Channel Number		Config 1	1, 2	Two radio channels are used for this test.
Active cell		Config 1	Cell 1: FR1 PCell Cell 2: FR1 SCell	FR1 PCell on RF channel number 1 FR1 SCell on RF channel number 2
CP length		Config 1	Normal	
DRX		Config 1	OFF	
Measurement gap pattern Id		Config 1	OFF	
Filter coefficient		Config 1	0	L3 filtering is not used
CSI-RS configuration for L1-RSRP reporting		Config 1	Cell 1: CSI-RS.2.5 TDD Cell 2: CSI-RS.2.5 TDD	
T1	s	Config 1	5	

Table A.6.5.7A.2.1-3: Cell specific test parameters for DL interruptions at switching between two uplink carriers in TDD-TDD CA

Parameter		Unit	Cell1	Cell2
Frequency Range			FR1	FR1
Duplex mode	Config 1		TDD	TDD
TDD configuration	Config 1		TDDConf.2.1 except that S='1 1DL: :2UL'; *nrofDownlinkSymbols: 11* *nrofUplinkSymbols: 2*	TDDConf.2.2
$BW_{channel}$	Config 1		40 MHz: $N_{RB,c}$ = 106	40 MHz: $N_{RB,c}$ = 106
Initial BWP Configuration	Config 1		DLBWP.0.1	DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.1	DLBWP.1.1
UL dedicated BWP configuration	Config 1		ULBWP.1.1	ULBWP.1.1

SRS configuration	Config 1		SRSConf.1 in Table A.4.4.1.1.1-3 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrofSymbols: n2	SRSConf.1 in Table A.4.4.1.1.1-3 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrofSymbols: n2
PDSCH Reference measurement channel	Config 1		SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET parameters	Config 1		CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET parameters	Config 1		CCR.2.1 TDD	CCR.2.1 TDD
OCNG Patterns			OP.1	OP.1
SMTC Configuration			SMTC.1	SMTC.1
SSB Configuration	Config 1		SSB.2 FR1	SSB.2 FR1
Correlation Matrix and Antenna Configuration			2x2 Low	2x2 Low
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note 2		dBm/15 kHz	-104	-104
SS-RSRP Note 3		dBm/SCS	-84	-84
$\hat{E}_s/I_{ot}$		dB	17	17
$\hat{E}_s/N_{oc}$		dB	17	17
N_{oc} Note 2	Config 1	dBm/SCS	-104	-101
Io Note3	Config 1	dBm/9.36 MHz	-58.96	-
		dBm/ 38.16MHz	-	-52.86
Time offset to Cell1 Note 5		µs	-	0
Propagation Condition			AWGN	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Void
Note 5: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.

A.6.5.7A.2.2 Test Requirements

The UE behaviour follows the requirements defined in clause 8.2.2.2.10A.

UE shall send L1-RSRP report while meeting the accuracy requirements defined in clause 10.1.19.2.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.7B DL interruptions at switching between one uplink band with one transmit antenna connector and one uplink band with two transmit antenna connectors

A.6.5.7B.1 DL interruptions at switching between two uplink bands in FDD-TDD CA

A.6.5.7B.1.1 Test Purpose and Environment

The purpose of this test is to verify DL interruption requirements during UE dynamic switching between two uplink bands defined in clause 8.2.2.2.10B. The test case is applicable for an uplink band pair of an inter-band UL CA configuration when the capability *uplinkTxSwitchingPeriod* is present, where NR UL carrier 1 in band A is capable of one transmit antenna connector, NR UL carrier 2 and carrier 3 in band B are capable of two transmit antenna connectors. NR UL carrier 2 and carrier 3 are two contiguous aggregated carriers, and band A and band B are different bands with different carrier frequencies.

There are three cells: FR1 FDD PCell (Cell 1), FR1 TDD SCell (Cell 2) and FR1 TDD SCell (Cell 3) where cell 1 in band A is with 1TX, cell2 and cell 3 in band B with 2Tx, cell2 and cell3 are two contiguous aggregated carriers. The test parameters for the three cells are given in Table A.6.5.7B.1.1-1, Table A.6.5.7B.1.1-2 and Table A.6.5.7B.1.1-3 below.

For NR FDD carrier (Cell 1), aperiodic CSI-RS for L1-RSRP reporting is triggered with power boosting [6dB] on the following symbol in the slot overlapping with the special slot of the NR TDD carrier (Cell 2):

- symbol#12 if UE does not report uplinkTxSwitching-DL-Interruption-r16;
- otherwise,
  - symbol #8 if UE capability *uplinkTxSwitchingPeriod* is 210us or
  - symbol #9 if UE capability *uplinkTxSwitchingPeriod* is 140us or
  - symbol #10 if UE capability *uplinkTxSwitchingPeriod* is 35us.

For NR TDD Cell 2 and NR TDD Cell 3, aperiodic CSI-RS for L1-RSRP reporting is configured with power boosting [6dB] on the following symbol in the special slot:

- symbol#10 if UE does not report uplinkTxSwitching-DL-Interruption-r16;
- otherwise,
  - symbol #4 if UE capability *uplinkTxSwitchingPeriod* is 210us or
  - symbol #5 if UE capability *uplinkTxSwitchingPeriod* is 140us or
  - symbol #8 if UE capability *uplinkTxSwitchingPeriod* is 35us.

This test verifies that the UE correctly report the L1-RSRP reporting. The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, *uplinkTxSwitching* is indicated to UE.

Table A.6.5.7B.1.1-1: Supported test configurations

Configuration	Description
1	NR Cell 1: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode NR Cell 2: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR Cell 3: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Table A.6.5.7B.1.1-2: General test parameters for DL interruptions at switching between two uplink bands in FDD-TDD CA

Parameter	Unit	Test configuration	Value	Comment
RF Channel Number		Config 1	1, 2, 3	Three radio channels are used for this test.
Active cell		Config 1	Cell 1: FR1 PCell Cell 2: FR1 SCell Cell 3: FR1 SCell	Cell1: FR1 PCell on RF channel number 1 in band A Cell 2: FR1 SCell on RF channel number 2 in band B Cell 3: FR1 SCell on RF channel number 3 in band B Note: Cell 2 and Cell 3 are two contiguous aggregated carriers
CP length		Config 1	Normal	
DRX		Config 1	OFF	
Measurement gap pattern Id		Config 1	OFF	
Filter coefficient		Config 1	0	L3 filtering is not used
CSI-RS configuration for L1-RSRP reporting		Config 1	Cell 1: CSI-RS.1.5 FDD Cell 2: CSI-RS.2.5 TDD Cell 3: CSI-RS.2.5 TDD	
T1	s	Config 1	5	

Table A.6.5.7B.1.1-3: Cell specific test parameters for DL interruptions at switching between two uplink bands in FDD-TDD CA

Parameter		Unit	Cell1	Cell2	Cell3
Frequency Range			FR1	FR1	FR1
Duplex mode	Config 1		FDD	TDD	TDD
TDD configuration	Config 1		N/A	TDDConf.2.1 except that: S='11DL: 1GP:2UL'; *nrofDownlinkSymbols: 11 nrofUplinkSymbols: 2*	TDDConf.2.1 except that: S='11DL: 1GP:2UL'; *nrofDownlinkSymbols: 11 nrofUplinkSymbols: 2*
$BW_{channel}$	Config 1		10 MHz: $N_{RB,c}$ = 52	40 MHz: $N_{RB,c}$ = 106	40 MHz: $N_{RB,c}$ = 106
Initial BWP Configuration	Config 1		DLBWP.0.1	DLBWP.0.1	DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.1	DLBWP.1.1	DLBWP.1.1
UL dedicated BWP configuration	Config 1		ULBWP.1.1	ULBWP.1.1	ULBWP.1.1
SRS configuration	Config 1		SRSConf.1 in Table A.4.4.1.1.1-3 is applied except that: resourceMappingstartPosition: 0resourceMappingnrofSymbols: n2	SRSConf.1 in Table A.4.4.1.1.1-3 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrofSymbols: n2	SRSConf.1 in Table A.4.4.1.1.1-3 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrofSymbols: n2
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET parameters	Config 1		CR.1.1 FDD	CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET parameters	Config 1		CCR.1.1 FDD	CCR.2.1 TDD	CCR.2.1 TDD
OCNG Patterns			OP.1	OP.1	OP.1

SMTC Configuration			SMTC.1	SMTC.1	SMTC.1
SSB Configuration	Config 1		SSB.1 FR1	SSB.2 FR1	SSB.2 FR1
Correlation Matrix and Antenna Configuration			1x2 Low	2x2 Low	2x2 Low
EPRE ratio of PSS to SSS		dB	0	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} Note 2		dBm/15 kHz	-104	-104	-104
SS-RSRP Note 3		dBm/SCS	-87	-87	-87
$\hat{E}_s/I_{ot}$		dB	17	14	14
$\hat{E}_s/N_{oc}$		dB	17	14	14
N_{oc} Note 2	Config 1	dBm/SCS	-104	-101	-101
Io Note3	Config 1	dBm/9.36 MHz	-58.96	-	-
		dBm/38.16MHz	-	-55.79	-55.79
Time offset to Cell1 Note 5		µs	-	0	0
Propagation Condition			AWGN	AWGN	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Void
Note 5: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.

A.6.5.7B.1.2 Test Requirements

The UE behaviour follows the requirements defined in clause 8.2.2.2.10B.

UE shall send L1-RSRP report while meeting the accuracy requirements defined in clause 10.1.19.2.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.7B.2 DL interruptions at switching between two uplink bands in TDD-TDD CA

A.6.5.7B.2.1 Test Purpose and Environment

The purpose of this test is to verify DL interruption requirements during UE dynamic switching between two uplink bands defined in clause 8.2.2.2.10B. The test case is applicable for an uplink band pair of an inter-band UL CA configuration when the capability *uplinkTxSwitchingPeriod* is present, where NR UL carrier 1 in band A is capable of one transmit antenna connector, NR UL carrier 2 and carrier 3 in band B are capable of two transmit antenna connectors. NR UL carrier 2 and carrier 3 are two contiguous aggregated carriers, and band A and band B are different bands with different carrier frequencies.

There are three cells: FR1 TDD PCell (Cell 1), FR1 TDD SCell (Cell 2) and FR1 TDD SCell (Cell 3) where cell 1 in band A is with 1TX, cell2 and cell 3 in band B with 2Tx, cell2 and cell3 are two contiguous aggregated carriers.The test parameters for the three cells are given in Table A.6.5.7B.2.1-1, Table A.6.5.7B.2.1-2 and Table A.6.5.7B.2.1-3 below.

For NR TDD PCell (Cell 1), aperiodic CSI-RS for L1-RSRP reporting is triggered with power boosting [6dB] on the following symbol in the special slot:

- symbol#10 if UE does not report uplinkTxSwitching-DL-Interruption-r16;
- otherwise,
  - symbol #4 if UE capability *uplinkTxSwitchingPeriod* is 210us or
  - symbol #5 if UE capability *uplinkTxSwitchingPeriod* is 140us or
  - symbol #8 if UE capability *uplinkTxSwitchingPeriod* is 35us.

For NR TDD Cell 2 and NR TDD Cell 3, aperiodic CSI-RS for L1-RSRP reporting is configured with power boosting [6dB] on the following symbol on the 2nd special slot of every 8 slots:

- symbol#10 if UE does not report uplinkTxSwitching-DL-Interruption-r16;
- otherwise,
  - symbol #4 if UE capability *uplinkTxSwitchingPeriod* is 210us or
  - symbol #5 if UE capability *uplinkTxSwitchingPeriod* is 140us or
  - symbol #8 if UE capability *uplinkTxSwitchingPeriod* is 35us.

This test verifies that the UE correctly report the L1-RSRP reporting. The test case is only applicable to UE which supports *simultaneousRxTxInterBandCA.*

The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, *uplinkTxSwitching* is indicated to UE.

Table A.6.5.7B.2.1-1: Supported test configurations

Configuration	Description
1	NR Cell 1: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR Cell 2: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR Cell 3: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Table A.6.5.7B.2.1-2: General test parameters for DL interruptions at switching between two uplink bands in TDD-TDD CA

Parameter	Unit	Test configuration	Value	Comment
RF Channel Number		Config 1	1, 2, 3	Two radio channels are used for this test.
Active cell		Config 1	Cell 1: FR1 PCell Cell 2: FR1 SCell Cell 3: FR1 SCell	Cell1: FR1 PCell on RF channel number 1 in band A Cell 2: FR1 SCell on RF channel number 2 in band B Cell 3: FR1 SCell on RF channel number 3 in band B Note: Cell 2 and Cell 3 are two contiguous aggregated carriers
CP length		Config 1	Normal	

DRX		Config 1	OFF	
Measurement gap pattern Id		Config 1	OFF	
Filter coefficient		Config 1	0	L3 filtering is not used
CSI-RS configuration for L1-RSRP reporting		Config 1	Cell 1: CSI-RS.2.5 TDD Cell 2: CSI-RS.2.5 TDD Cell 3: CSI-RS.2.5 TDD	
T1	s	Config 1	5	

Table A.6.5.7B.2.1-3: Cell specific test parameters for DL interruptions at switching between two uplink bands in TDD-TDD CA

Parameter		Unit	Cell1	Cell2	Cell3
Frequency Range			FR1	FR1	FR1
Duplex mode	Config 1		TDD	TDD	TDD
TDD configuration	Config 1		TDDConf.2.1 except that S='1 1DL: :2UL'; *nrofDownlinkSymbols: 11 nrofUplinkSymbols: 2*	TDDConf.2.2	TDDConf.2.2
$BW_{channel}$	Config 1		40 MHz: $N_{RB,c}$ = 106	40 MHz: $N_{RB,c}$ = 106	40 MHz: $N_{RB,c}$ = 106
Initial BWP Configuration	Config 1		DLBWP.0.1	DLBWP.0.1	DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.1	DLBWP.1.1	DLBWP.1.1
UL dedicated BWP configuration	Config 1		ULBWP.1.1	ULBWP.1.1	ULBWP.1.1
SRS configuration	Config 1		SRSConf.1 in Table A.4.4.1.1.1-3 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrofSymbols: n2	SRSConf.1 in Table A.4.4.1.1.1-3 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrofSymbols: n2	SRSConf.1 in Table A.4.4.1.1.1-3 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrofSymbols: n2
PDSCH Reference measurement channel	Config 1		SR.2.1 TDD	SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET parameters	Config 1		CR.2.1 TDD	CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET parameters	Config 1		CCR.2.1 TDD	CCR.2.1 TDD	CCR.2.1 TDD
OCNG Patterns			OP.1	OP.1	OP.1
SMTC Configuration			SMTC.1	SMTC.1	SMTC.1
SSB Configuration	Config 1		SSB.2 FR1	SSB.2 FR1	SSB.2 FR1
Correlation Matrix and Antenna Configuration			1x2 Low	2x2 Low	2x2 Low
EPRE ratio of PSS to SSS		dB	0	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					

N_{oc} Note 2		dBm/15 kHz	-104	-104	-104
SS-RSRP Note 3		dBm/SCS	-84	-87	-87
$\hat{E}_s/I_{ot}$		dB	17	14	14
$\hat{E}_s/N_{oc}$		dB	17	14	14
N_{oc} Note 2	Config 1	dBm/SCS	-104	-101	-101
Io Note3	Config 1	dBm/9.36 MHz	-58.96	-	-
		dBm/ 38.16MHz	-	-55.79	-55.79
Time offset to Cell1 Note 5		µs	-	0	0
Propagation Condition			AWGN	AWGN	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Void
Note 5: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.

A.6.5.7B.2.2 Test Requirements

The UE behaviour follows the requirements defined in clause 8.2.2.2.10B.

UE shall send L1-RSRP report while meeting the accuracy requirements defined in clause 10.1.19.2.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.7C DL interruptions at switching between two uplink bands with two transmit antenna connectors

A.6.5.7C.1 DL interruptions at switching between two uplink bands with two transmit antenna connectors in FDD-TDD CA

A.6.5.7C.1.1 Test Purpose and Environment

The purpose of this test is to verify DL interruption requirements during UE dynamic switching between two uplink bands with two transmit antenna connectors defined in clause 8.2.2.2.10C. The test case is applicable for an uplink band pair of an inter-band FDD-TDD CA configuration when the capability *[uplinkTxSwitchingPeriod2T2T]* is present, where NR UL carrier 1 in band A is capable of two transmit antenna connector, NR UL carrier 2 and carrier 3 in band B are capable of two transmit antenna connectors. NR UL carrier 2 and carrier 3 are two contiguous aggregated carriers, and band A and band B are different bands with different carrier frequencies.

There are three cells: FR1 FDD PCell (Cell 1), FR1 TDD SCell (Cell 2) and FR1 TDD SCell (Cell 3) where cell 1 in band A is with 2Tx, cell2 and cell 3 in band B with 2Tx, cell2 and cell3 are two contiguous aggregated carriers. The test parameters for the three cells are given in Table A.6.5.7C.1.1-1, Table A.6.5.7C.1.1-2 and Table A.6.5.7C.1.1-3 below.

For NR FDD carrier (Cell 1), aperiodic CSI-RS for L1-RSRP reporting is triggered with power boosting [6dB] on the following symbol in the slot overlapping with the special slot of the NR TDD carrier (Cell 2) and NR TDD carrier (Cell 3):

- symbol#12 if UE does not report uplinkTxSwitching-DL-Interruption;

- otherwise,
  - symbol #8 if UE capability *[uplinkTxSwitchingPeriod2T2T]* is 210us or
  - symbol #9 if UE capability *[uplinkTxSwitchingPeriod2T2T]* is 140us or
  - symbol #10 if UE capability *[uplinkTxSwitchingPeriod2T2T]* is 35us.

For NR TDD carrier (Cell 2) and NR TDD carrier (Cell 3), aperiodic CSI-RS for L1-RSRP reporting is configured with power boosting [6dB] on the following symbol in the special slot:

- symbol#10 if UE does not report [uplinkTxSwitching-DL-Interruption];
- otherwise,
  - symbol #4 if UE capability *[uplinkTxSwitchingPeriod2T2T]* is 210us or
  - symbol #5 if UE capability *[uplinkTxSwitchingPeriod2T2T]* is 140us or
  - symbol #8 if UE capability *[uplinkTxSwitchingPeriod2T2T]* is 35us.

This test verifies that the UE correctly report the L1-RSRP reporting. The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, *[uplinkTxSwitchingPeriod2T2T]* is indicated to UE.

Table A.6.5.7C.1.1-1: Supported test configurations

Configuration	Description
1	NR Cell 1: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode NR Cell 2: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR Cell 3: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Table A.6.5.7C.1.1-2: General test parameters for DL interruptions at switching between two uplink bands with two transmit antenna connectors in FDD-TDD CA

Parameter	Unit	Test configuration	Value	Comment
RF Channel Number		Config 1	1, 2, 3	Three radio channels are used for this test.
Active cell		Config 1	Cell 1: FR1 PCell Cell 2: FR1 SCell Cell 3: FR1 SCell	FR1 PCell on RF channel number 1 FR1 SCell on RF channel number 2 FR1 SCell on RF channel number 3
CP length		Config 1	Normal	
DRX		Config 1	OFF	
Measurement gap pattern Id		Config 1	OFF	
Filter coefficient		Config 1	0	L3 filtering is not used
CSI-RS configuration for L1-RSRP reporting		Config 1	Cell 1: CSI-RS.1.5 FDD Cell 2: CSI-RS.2.5 TDD Cell 3: CSI-RS.2.5 TDD	
T1	s	Config 1	5	

Table A.6.5.7C.1.1-3: Cell specific test parameters for DL interruptions at switching between two uplink bands with two transmit antenna connectors in FDD-TDD CA

Parameter	Unit	Cell1	Cell2	Cell3

Frequency Range			FR1	FR1	FR1
Duplex mode	Config 1		FDD	TDD	TDD
TDD configuration	Config 1		N/A	TDDConf.2.1 except that: S='11DL: 1GP:2UL'; *nrofDownlinkSymbols: 11 nrofUplinkSymbols: 2*	TDDConf.2.1 except that: S='11DL: 1GP:2UL'; *nrofDownlinkSymbols: 11 nrofUplinkSymbols: 2*
$BW_{channel}$	Config 1		10 MHz: $N_{RB,c}$ = 52	40 MHz: $N_{RB,c}$ = 106	40 MHz: $N_{RB,c}$ = 106
Initial BWP Configuration	Config 1		DLBWP.0.1	DLBWP.0.1	DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.1	DLBWP.1.1	DLBWP.1.1
UL dedicated BWP configuration	Config 1		ULBWP.1.1	ULBWP.1.1	ULBWP.1.1
SRS configuration	Config 1		SRSConf.1 in Table A.4.4.1.1.1-3 is applied except that: resourceMappingstartPosition: 0resourceMappingnrofSymbols: n2	SRSConf.1 in Table A.4.4.1.1.1-3 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrofSymbols: n2	SRSConf.1 in Table A.4.4.1.1.1-3 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrofSymbols: n2
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET parameters	Config 1		CR.1.1 FDD	CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET parameters	Config 1		CCR.1.1 FDD	CCR.2.1 TDD	CCR.2.1 TDD
OCNG Patterns			OP.1	OP.1	OP.1
SMTC Configuration			SMTC.1	SMTC.1	SMTC.1
SSB Configuration	Config 1		SSB.1 FR1	SSB.2 FR1	SSB.2 FR1
Correlation Matrix and Antenna Configuration			2x2 Low	2x2 Low	2x2 Low
EPRE ratio of PSS to SSS		dB	0	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					

EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} Note 2		dBm/15 kHz	-104	-104	-104
SS-RSRP Note 3		dBm/SCS	-87	-87	-87
$\hat{E}_s/I_{ot}$		dB	17	14	14
$\hat{E}_s/N_{oc}$		dB	17	14	14
N_{oc} Note 2	Config 1	dBm/SCS	-104	-101	-101
Io Note3	Config 1	dBm/9.36 MHz	-58.96	-	-
		dBm/38.16MHz	-	-55.79	-55.79
Time offset to Cell1 Note 5		µs	-	0	0
Propagation Condition			AWGN	AWGN	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Void
Note 5: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.

A.6.5.7C.1.2 Test Requirements

The UE behaviour follows the requirements defined in clause 8.2.2.2.10C.

UE shall send L1-RSRP report while meeting the accuracy requirements defined in clause 10.1.19.2.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.7C.2 DL interruptions at switching between two uplink bands with two transmit antenna connectors in TDD-TDD CA

A.6.5.7C.2.1 Test Purpose and Environment

The purpose of this test is to verify DL interruption requirements during UE dynamic switching between two uplink carriers defined in clause 8.2.2.2.10C. The test case is applicable for an uplink band pair of an inter-band TDD-TDD CA configuration when the capability *[uplinkTxSwitchingPeriod2T2T]* is present, , where NR UL carrier 1 in band A is capable of two transmit antenna connector, NR UL carrier 2 and carrier 3 in band B are capable of two transmit antenna connectors. NR UL carrier 2 and carrier 3 are two contiguous aggregated carriers, and band A and band B are different bands with different carrier frequencies.

There are three cells: FR1 TDD PCell (Cell 1), FR1 TDD SCell (Cell 2) and FR1 TDD SCell (Cell 3) where cell 1 in band A is with 2Tx, cell2 and cell 3 in band B with 2Tx, cell2 and cell3 are two contiguous aggregated carriers. The test parameters for the three cells are given in Table A.6.5.7C.2.1-1, Table A.6.5.7C.2.1-2 and Table A.6.5.7C.2.1-3 below.

For NR TDD PCell (Cell 1), aperiodic CSI-RS for L1-RSRP reporting is triggered with power boosting [6dB] on the following symbol in the special slot:

- symbol#10 if UE does not report uplinkTxSwitching-DL-Interruption;
- otherwise,
  - symbol #4 if UE capability *[uplinkTxSwitchingPeriod2T2T]* is 210us or
  - symbol #5 if UE capability *[uplinkTxSwitchingPeriod2T2T]* is 140us or
  - symbol #8 if UE capability *[uplinkTxSwitchingPeriod2T2T]* is 35us.

For NR TDD SCell (Cell 2) and NR TDD SCell (Cell 3), aperiodic CSI-RS for L1-RSRP reporting is configured with power boosting [6dB] on the following symbol on the 2nd special slot of every 8 slots:

- symbol#10 if UE does not report [uplinkTxSwitching-DL-Interruption];
- otherwise,
  - symbol #4 if UE capability *[uplinkTxSwitchingPeriod2T2T]* is 210us or
  - symbol #5 if UE capability *[uplinkTxSwitchingPeriod2T2T]* is 140us or
  - symbol #8 if UE capability *[uplinkTxSwitchingPeriod2T2T]* is 35us.

This test verifies that the UE correctly report the L1-RSRP reporting. The test case is only applicable to UE which supports *simultaneousRxTxInterBandCA.*

The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, *[uplinkTxSwitchingPeriod2T2T]* is indicated to UE.

Table A.6.5.7C.2.1-1: Supported test configurations

Configuration	Description
1	NR Cell 1: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR Cell 2: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR Cell 3: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Table A.6.5.7C.2.1-2: General test parameters for DL interruptions at switching between two uplink bands with two transmit antenna connectors in TDD-TDD CA

Parameter	Unit	Test configuration	Value	Comment
RF Channel Number		Config 1	1, 2, 3	Three radio channels are used for this test.
Active cell		Config 1	Cell 1: FR1 PCell Cell 2: FR1 SCell Cell 3: FR1 SCell	FR1 PCell on RF channel number 1 FR1 SCell on RF channel number 2 FR1 SCell on RF channel number 3
CP length		Config 1	Normal	
DRX		Config 1	OFF	
Measurement gap pattern Id		Config 1	OFF	
Filter coefficient		Config 1	0	L3 filtering is not used
CSI-RS configuration for L1-RSRP reporting		Config 1	Cell 1: CSI-RS.2.5 TDD Cell 2: CSI-RS.2.5 TDD Cell 3: CSI-RS.2.5 TDD	
T1	s	Config 1	5	

Table A.6.5.7C.2.1-3: Cell specific test parameters for DL interruptions at switching between two uplink bands with two transmit antenna connectors in TDD-TDD CA

Parameter		Unit	Cell1	Cell2	Cell3
Frequency Range			FR1	FR1	FR1
Duplex mode	Config 1		TDD	TDD	TDD
TDD configuration	Config 1		TDDConf.2.1 except that S='1 1DL: :2UL'; *nrofDownlinkSymbols: 11* *nrofUplinkSymbols: 2*	TDDConf.2.2	TDDConf.2.2
$BW_{channel}$	Config 1		40 MHz: $N_{RB,c}$ = 106	40 MHz: $N_{RB,c}$ = 106	40 MHz: $N_{RB,c}$ = 106
Initial BWP Configuration	Config 1		DLBWP.0.1	DLBWP.0.1	DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.1	DLBWP.1.1	DLBWP.1.1
UL dedicated BWP configuration	Config 1		ULBWP.1.1	ULBWP.1.1	ULBWP.1.1
SRS configuration	Config 1		SRSConf.1 in Table A.4.4.1.1.1-3 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrofSymbols: n2	SRSConf.1 in Table A.4.4.1.1.1-3 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrofSymbols: n2	SRSConf.1 in Table A.4.4.1.1.1-3 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrofSymbols: n2

PDSCH Reference measurement channel	Config 1		SR.2.1 TDD	SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET parameters	Config 1		CR.2.1 TDD	CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET parameters	Config 1		CCR.2.1 TDD	CCR.2.1 TDD	CCR.2.1 TDD
OCNG Patterns			OP.1	OP.1	OP.1
SMTC Configuration			SMTC.1	SMTC.1	SMTC.1
SSB Configuration	Config 1		SSB.2 FR1	SSB.2 FR1	SSB.2 FR1
Correlation Matrix and Antenna Configuration			2x2 Low	2x2 Low	2x2 Low
EPRE ratio of PSS to SSS		dB	0	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} Note 2		dBm/15 kHz	-104	-104	-104
SS-RSRP Note 3		dBm/SCS	-84	-87	-87
$\hat{E}_s/I_{ot}$		dB	17	14	14
$\hat{E}_s/N_{oc}$		dB	17	14	14
N_{oc} Note 2	Config 1	dBm/SCS	-104	-101	-101
Io Note3	Config 1	dBm/9.36 MHz	-58.96	-	-
		dBm/38.16MHz	-	-55.79	-55.79

Time offset to Cell1 Note 5	μs	-	0	0
Propagation Condition		AWGN	AWGN	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Void
Note 5: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.

A.6.5.7C.2.2 Test Requirements

The UE behaviour follows the requirements defined in clause 8.2.2.2.10C.

UE shall send L1-RSRP report while meeting the accuracy requirements defined in clause 10.1.19.2.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.8 UE specific CBW change

A.6.5.8.1 UE specific CBW change on PCell in FR1 in non-DRX

A.6.5.8.1.1 Test Purpose and Environment

The purpose of this test is to verify the UE specific CBW change delay requirement defined in clause 8.13.

The supported test configurations are shown in Table A.6.5.8.1.1-1. The test scenario comprises of one Cell (Cell 1), which is PCell as given in Table A.6.5.8.1.1-2. Cell-specific parameters are specified in Table A.6.5.8.1.1-3.

PDCCHs indicating new transmissions shall be sent continuously on Cell 1 to ensure that the UE sends ACK/NACK during the test.

Before the test starts:

- UE is connected to Cell 1 (PCell) on radio channel 1.
- UE has bandwidth part BWP-1 in its RRC-configuration for Cell 1 (PCell).
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 of initial condition in PCell.
- UE has been configured with UE specific CBW (CBW-1).
- UE is indicated in *SCS-SpecificCarrier* [2] that the UE specific CBW is CBW-1 as the initial condition in Cell 1 (PCell).

Cell1 (PCell) has constant signal levels throughout the test.

The test consists of 1 time period, with duration of T1.

During T1,

Time period T1 starts when a *RRCReconfiguration* containing *SCS-SpecificCarrier* with updated UE specific CBW, sent from the test equipment to the UE, is completely received at the UE side in PCell's slot # denoted *i*. The UE shall reconfigure its UE specific CBW with the updated CBW-2 for the final condition.

The UE shall be able to receive PDSCH on PCell from the first DL slot that occurs after the beginning of DL slot $i + \frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$ as defined in clause 8.13 and starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot $i + \frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length} + k1$ on the PCell's BWP-1 on CBW-2 for the final condition. The UE shall be continuously scheduled on the PCell's BWP-1 on CBW-2 for the final condition starting from the first DL slot right after slot $i + \frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$.

$T_{RRCprocessingDelay}$ and $T_{CBWchangeDelayRRC}$ are defined in clause 8.13.

The test equipment verifies the UE specific CBW switching delay in PCell by estimating the time from the moment the RRC Reconfiguration message including updated UE specific CBW configuration is sent until the moment a vaild ACK/NACK is received.

Table A.6.5.8.1.1-1: Supported test configurations for UE specific CBW change in SA scenario

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.6.5.8.1.1-2: General test parameters for UE specific CBW change in SA scenario

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active Cell		Cell 1	Cell on RF channel number 1.
CP length		Normal	
DRX		OFF	
T1	s	0.2	

Table A.6.5.8.1.1-3: NR Cell specific test parameters for UE specific CBW change in SA scenario

Parameter			Unit	Cell 1
Frequency Range				FR1
Duplex mode		Config 1		FDD
		Config 2,3		TDD
TDD configuration		Config 1		Not Applicable
		Config 2		TDDConf.1.1
		Config 3		TDDConf.2.1
$BW_{channel}$		Config 1		10 MHz: $N_{RB,c}$ = 52
		Config 2		10 MHz: $N_{RB,c}$ = 52
		Config 3		40 MHz: $N_{RB,c}$ = 106
Active DL BWP ID		Config 1,2, 3		1
Initial DL BWP Configuration (BWP-1)		Config 1,2, 3		DLBWP.0.2
Initial UL BWP Configuration		Config 1,2, 3		ULBWP.0.2
Initial Condition	Active DLCBW-1 Configuration	Config 1, 2, 3		DLCBW.1.1
	Active UL CBW-1 Configuration	Config 1, 2, 3		ULCBW.1.1
Final Condition	Active DLCBW-1 Configuration	Config 1, 2, 3		DLCBW.1.2
	Active UL CBW-1 Configuration	Config 1, 2, 3		ULCBW.1.2
PDSCH Reference measurement channel		Config 1		SR.1.1 FDD
		Config 2		SR.1.1 TDD
		Config 3		SR2.1 TDD
RMSI CORESET parameters		Config 1		CR.1.1 FDD
		Config 2		CR.1.1 TDD
		Config 3		CR2.1 TDD
Dedicated CORESET parameters		Config 1		CCR.1.1 FDD
		Config 2		CCR.1.1 TDD
		Config 3		CCR.2.1 TDD
OCNG Patterns				OP.1
SSB Configuration		Config 1,2		SSB.1 FR1
		Config 3		SSB.2 FR1
SMTC Configuration				SMTC.1
TRS Configuration		Config 1		TRS.1.1 FDD
		Config 2		TRS.1.1 TDD
		Config 3		TRS.1.2 TDD
Antenna Configuration				1x2 Low
Propagation Condition				AWGN
EPRE ratio of PSS to SSS			dB	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note 2		Config 1,2	dBm/SCS	-104
		Config 3		-101
SS-RSRP Note 3		Config 1,2	dBm/SCS	-87
		Config 3		-84
$\hat{E}_s/I_{ot}$			dB	17

$\hat{E}_s/N_{oc}$		dB	17
Io^{Note3}	Config 1,2	dBm/ 9.36MHz	-58.96
	Config 3	dBm/ 38.16MHz	-52.86
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.1 is linked with ULBWP.0.1; DLBWP.1.1 is linked with ULBWP.1.1; as defined in clause 12 of TS 38.213 [3].			

A.6.5.8.1.2 Test Requirements

During T1, the UE shall be ready for the reception of uplink grant for the PCell from the first DL slot that occurs right after the begining of slot $i + \frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$ and starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot $i + \frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length} + k1$.

Where, *k1* is the timing between DL data receiving and acknowledgement as specified in [7].

All of the above test requirements shall be fulfilled in order for the observed UE specific CBW change delay on the PCell to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.9 Pathloss reference signal switching delay

A.6.5.9.1 MAC-CE based pathloss reference signal switch delay

A.6.5.9.1.1 Test Purpose and Environment

The purpose of this test is to verify the MAC-CE based pathloss reference signal switch delay requirement defined in clause 8.14.

The supported test configurations are shown in Table A.6.5.9.1.1-1. The test scenario comprises of one cell (Cell 1) as given in Table A.6.5.9.1.1-2. Cell-specific parameters of the cell are specified in Table A.6.5.9.1.1-3 below.

The test consists of 3 successive time periods, with duration of T1, T2 and T3, respectively.

Prior to the start of the time duration T1,

- UE is connected to Cell 1 on radio channel 1.
- UE shall be fully synchronized to SSB #0.

During T1,

- The UE shall track SSB #1 so that SSB #1 as a pathloss reference signal is known to the UE.

Time period T2 starts when the UE is configured of the power headroom reporting functionality by upper layers by the test equipment and the UE shall transmit a PHR during T2.

During T2,

- UE is configured with a *phr-ProhibitTimer* timer value for Cell 1.
- UE is configured with a *phr-Tx-PowerFactorChange* value for Cell 1.

During T3,

> Time period T3 starts when a PDSCH carrying MAC-CE activation for pathloss reference signal switch, sent from the test equipment to the UE to swicth the pathloss reference signal from SSB 0 to SSB 1, is received at the UE side in Cell1's slot # denoted *i*. The UE shall switch its pathloss reference signal to the target one and send PHR.
>
> The UE shall be able to apply the target pathloss reference signal of the serving cell on which pathloss reference signal switch occurs no later than the slot $i + T_{HARQ} + \left\lceil \frac{3\text{ms} + 5 * T_{target_PL-RS} + 2\text{ms}}{NR\ slot\ length} \right\rceil$ as defined in clause 8.14. The UE shall be able to apply old pathloss reference signals until the slot $i + T_{HARQ} + 3\text{N}_{\text{slot}}^{\text{subframe},\mu}$ as defined in clause 8.14.

The test equipment verifies the pathloss RS switch time by counting the slots from the time when the pathloss RS switch command is transmitted till a PHR is received during T3.

Table A.6.5.9.1.1-1: MAC-CE based pathloss reference signal switch supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.	

Table A.6.5.9.1.1-2: General test parameters for MAC-CE based pathloss reference signal switch in SA

Parameter		Unit	Value	Comment
Active PCell			Cell 1	
RF Channel Number			1	
Duplex mode	Config 1		FDD	
	Config 2, 3		TDD	
DL initial BWP configuration	Config 1, 2, 3		DLBWP.0.1	
DL dedicated BWP configuration	Config 1, 2, 3		DLBWP.1.1	
UL initial BWP configuration	Config 1, 2, 3		ULBWP.0.1	
UL dedicated BWP configuration	Config 1, 2, 3		ULBWP.1.1	
TDD Configuration	Config 1		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
CORESET Reference Channel	Config 1		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
SSB Configuration	Config 1		SSB.1 FR1	
	Config 2		SSB.1 FR1	
	Config 3		SSB.2 FR1	
SMTC Configuration	Config 1, 2		SMTC.1	
	Config 3		SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 kHz	
	Config 3		30 kHz	
SSB index assigned as pathloss RS			0 in T1, 0 in T2, 1 in T3	

OCNG parameters		OP.1	
CP length		Normal	
Correlation Matrix and Antenna Configuration		1x2 Low	
DRX		OFF	
Gap pattern ID		gp0	
phr-ProhibitTimer	sub frame	0	
phr-Tx-PowerFactorChange	dB	5	
phr-PeriodicTimer	sub frame	infinity	
Filter coefficient		0	L3 filtering is not used
T1	s	[2]	
T2	s	[2]	
T3	s	0.2	

Table A.6.5.9.1.1-3: NR Cell specific test parameters for MAC-CE based pathloss reference signal switch in SA

Parameter			Unit	Test 1		
				T1	T2	T3
EPRE ratio of PDCCH DMRS to SSS			dB	4		
EPRE ratio of PDCCH to PDCCH DMRS			dB	0		
EPRE ratio of PBCH DMRS to SSS			dB	0		
EPRE ratio of PBCH to PBCH DMRS			dB			
EPRE ratio of PSS to SSS			dB			
EPRE ratio of PDSCH DMRS to SSS			dB			
EPRE ratio of PDSCH to PDSCH DMRS			dB			
EPRE ratio of OCNG DMRS to SSS			dB			
EPRE ratio of OCNG to OCNG DMRS			dB			
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	[7]		
	N_{oc}	Config 1, 2, 3	dBm/ 15kHz	[-101]		
	$\hat{E}_s / N_{oc}$		dB	[7]		
	SS-RSRP Note 4	Config 1, 2	dBm/ SCS	[-94]		
		Config 3		[-91]		
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	[-3]		
	N_{oc}	Config 1, 2, 3	dBm/ 15kHz	[-101]		
	$\hat{E}_s / N_{oc}$		dB	[-3]		
	SS-RSRP Note 4	Config 1, 2	dBm/ SCS	[-104]		
		Config 3		[-101]		
Io Note 5	Config 1, 2		dBm	-65.3/9.36MHz		
	Config 3			-59.2/38.16MHz		
Propagation condition				AWGN		

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 3:	SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 4:	The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.
Note 5:	SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.

A.6.5.9.1.2 Test Requirements

During T3, the UE shall start to send the PHR for PCell no later than the slot $i + T_{HARQ} + \left\lceil \frac{3\text{ms} + 5 * T_{target_PL-RS} + 2\text{ms}}{NR\ slot\ length} \right\rceil$.

During T3, the UE shall start to send the PHR for PCell no earlier than the slot $i + T_{HARQ} + 3\text{N}_{\text{slot}}^{\text{subframe},\mu}$.

Where, T_{HARQ} is the timing between pathloss reference MAC-CE activation command and acknowledgement as specified in [7], T_{target_PL-RS} is the periodicity of the target pathloss reference signal which is SSB in this test.

During T3, UE shall send L1-RSRP report with measurement results for both SSB0 and SSB1.

All of the above test requirements shall be fulfilled in order for the observed pathloss RS switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

Note: The UE shall be given proper uplink transmission grant during T2 and T3.

A.6.6 Measurement procedure

A.6.6.1 Intra-frequency Measurements

A.6.6.1.1 SA event triggered reporting tests without gap under non-DRX

A.6.6.1.1.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clauses 9.2.5.1 and 9.2.5.2.

A.6.6.1.1.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for PCell and neighbour cell are given in Table A.6.6.1.1.1-1 and A.6.6.1.1.1-2 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

Table A.6.6.1.1.1.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Note: The UE is only required to be tested in one of the supported test configurations.

Table A.6.6.1.1.2-2: General test parameters for SA intra-frequency event triggered reporting without gap for FR1

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3	Cell 1	
Neighbour cell		1, 2, 3	Cell 2	Cell to be identified.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
A3-Offset	dB	1, 2, 3	-4.5	
CP length		1, 2, 3	Normal	
Hysteresis	dB	1, 2, 3	0	
Time To Trigger	s	1, 2, 3	0	
Filter coefficient		1, 2, 3	0	L3 filtering is not used
DRX		1, 2, 3		OFF
Time offset between serving and neighbour cells		1	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 μs	Synchronous cells
		3	3 μs	Synchronous cells
T1	s	1, 2, 3	5	
T2	s	1, 2, 3	5	

Table A.6.6.1.1.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting without gap for FR1

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	TN/A		TN/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD		N/A	
		3	CR.2.1 TDD		N/A	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD		N/A	
		3	CCR.2.1 TDD		N/A	
OCNG Patterns		1, 2, 3	OP.1		OP.1	
TRS Configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD		N/A	

		3	TRS.1.2 TDD		N/A	
IInitial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2, 3	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1	-98			
		2				
		3				
$\hat{E}_s / I_{ot}$	dB	1	4	-1.46	-Infinity	-1.46
		2				
		3				
$\hat{E}_s / N_{oc}$	dB	1	4	4	-Infinity	4
		2				
		3				
SS-RSRP Note 3	dBm/SCS kHz	1	-94	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1	-64.60	-62.25	--64.60	-62.25
	dBm/9.36 MHz	2	-64.60	-62.25	--64.60	-62.25
	dBm/38.16 MHz	3	-58.50	-56.16	--58.50	-56.16
Propagation Condition		1, 2, 3	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.6.1.1.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 800 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.1.2 SA event triggered reporting tests without gap under DRX

A.6.6.1.2.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clauses 9.2.5.1 and 9.2.5.2.

A.6.6.1.2.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for PCell are given in Table A.6.6.1.2.2-1, A.6.6.1.2.2-2 and A.6.6.1.2.2-3 below. In the measurement controlinformation, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furhtermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.6.6.1.2.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.6.6.1.2.2-2: General test parameters for SA intra-frequency event triggered reporting without gap for PCell in FR1 with DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
Active cell		1, 2, 3	Cell 1		
Neighbour cell		1, 2, 3	Cell 2		Cell to be identified.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2		
SSB configuration		1	SSB.1 FR1		
		2	SSB.1 FR1		
		3	SSB.2 FR1		
SMTC configuration		1	SMTC.2		
		2	SMTC.1		
		3	SMTC.1		
A3-Offset	dB	1, 2, 3	-4.5		
CP length		1, 2, 3	Normal		
Hysteresis	dB	1, 2, 3	0		
Time To Trigger	s	1, 2, 3	0		
Filter coefficient		1, 2, 3	0		L3 filtering is not used
DRX		1, 2, 3	DRX.1	DRX. 7	
Time offset between serving and neighbour cells		1	3 ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 μs		Synchronous cells
		3	3 μs		Synchronous cells
T1	s	1, 2, 3	5		
T2	s	1, 2, 3	5	10	

Table A.6.6.1.2.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting without gap for PCell in FR1 with DRX

Parameter	Unit	Test configuration	Cell 1	Cell 2

			T1	T2	T1	T2
TDD configuration		1	TN/A		TN/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD		N/A	
		3	CR.2.1 TDD		N/A	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD		N/A	
		3	CCR.2.1 TDD		N/A	
OCNG Patterns		1, 2, 3	OP.1		OP.1	
TRS configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD		N/A	
		3	TRS.1.2 TDD		N/A	
IInitial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2, 3	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1	-98			
		2				
		3				
$\hat{E}_s/I_{ot}$	dB	1	4	-1.46	-Infinity	-1.46
		2				
		3				
$\hat{E}_s/N_{oc}$	dB	1	4	4	-Infinity	4
		2				
		3				
SS-RSRP Note 3	dBm/SCS kHz	1	-94	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1	-64.60	-62.25	--64.60	-62.25
	dBm/9.36 MHz	2	-64.60	-62.25	--64.60	-62.25
	dBm/38.16 MHz	3	-58.50	-56.16	--58.50	-56.16
Propagation Condition		1, 2, 3	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.6.1.2.3 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 6400 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.1.3 SA event triggered reporting tests with per-UE gaps under non-DRX

A.6.6.1.3.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clause 9.2.6.2 and 9.2.6.3.

A.6.6.1.3.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for PCell are given in Table A.6.6.1.3.1-1 and A.6.6.1.3.1-2 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

Table A.6.6.1.3.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.6.6.1.3.2-2: General test parameters for SA intra-frequency event triggered reporting with per-UE gaps for PCell in FR1

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3	Cell 1	
Neighbour cell		1, 2, 3	Cell 2	Cell to be identified.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2	
Measurement gap type		1, 2, 3	Per-UE gaps	
Measurement gap repitition periodicity	ms	1, 2, 3	40	
Measurement gap length	ms	1, 2, 3	6	

Measurement gap offset	ms	1, 2, 3	39	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
CSI-RS parameters		1	CSI-RS.1.2 FDD resource #0	
		2	CSI-RS.1.2 TDD resource #0	
		3	CSI-RS.2.2 TDD resource #0	
A3-Offset	dB	1, 2, 3	-4.5	
CP length		1, 2, 3	Normal	
Hysteresis	dB	1, 2, 3	0	
Time To Trigger	s	1, 2, 3	0	
Filter coefficient		1, 2, 3	0	L3 filtering is not used
DRX	ms	1, 2, 3		OFF
Time offset between serving and neighbour cells		1	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 μs	Synchronous cells
		3	3 μs	Synchronous cells
T1	s	1, 2, 3	5	
T2	s	1, 2, 3	5	

Table A.6.6.1.3.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting with per-UE gaps for PCell in FR1

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	TN/A		TN/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD		N/A	
		3	CR.2.1 TDD		N/A	
Dedicated CORESET RMC configuration		1	CCR.1.2 FDD		N/A	
		2	CCR.1.2 TDD		N/A	
		3	CCR.2.1 TDD		N/A	
OCNG Patterns		1, 2, 3	OP.1		OP.1	
TRS configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD		N/A	
		3	TRS.1.2 TDD		N/A	
IInitial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3	DLBWP.1.2		DLBWP.1.1	

Active UL BWP configuration		1, 2, 3	ULBWP.1.2		ULBWP.1.1	
RLM-RS		1, 2, 3	CSI-RS		SSB	
N_{oc} Note 2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1	-98			
		2				
		3				
$\hat{E}_s/I_{ot}$	dB	1	4	-1.46	-Infinity	-1.46
		2				
		3				
$\hat{E}_s/N_{oc}$	dB	1	4	4	-Infinity	4
		2				
		3				
SS-RSRP Note 3	dBm/SCS kHz	1	-94	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1	-64.60	-62.25	--64.60	-62.25
	dBm/9.36 MHz	2	-64.60	-62.25	--64.60	-62.25
	dBm/38.16 MHz	3	-58.50	-56.16	--58.50	-56.16
Propagation Condition		1, 2, 3	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.6.1.3.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 800 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.1.4 SA event triggered reporting tests with per-UE gaps under DRX

A.6.6.1.4.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clause 9.2.6.2 and 9.2.6.3.

A.6.6.1.4.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for PCell are given in Table A.6.6.1.4.2-1, A.6.6.1.4.2-2 and A.6.6.1.4.2-3 below. In the measurement control information, a measurement object is configured for the frequency

of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furhtermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.6.6.1.4.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.6.6.1.4.2-2: General test parameters for SA intra-frequency event triggered reporting with per-UE gaps for PCell in FR1 with DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
Active cell		1, 2, 3	Cell 1		
Neighbour cell		1, 2, 3	Cell 2		Cell to be identified.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2		
Measurement gap type		1, 2, 3	Per-UE gaps		
Measurement gap repitition periodicity	ms	1, 2, 3	40		
Measurement gap length	ms	1, 2, 3	6		
Measurement gap offset	ms	1, 2, 3	39		
SSB configuration		1	SSB.1 FR1		
		2	SSB.1 FR1		
		3	SSB.2 FR1		
SMTC configuration		1	SMTC.2		
		2	SMTC.1		
		3	SMTC.1		
CSI-RS parameters		1	CSI-RS.1.2 FDD resource #0		
		2	CSI-RS.1.2 TDD resource #0		
		3	CSI-RS.2.2 TDD resource #0		
A3-Offset	dB	1, 2, 3	-4.5		
CP length		1, 2, 3	Normal		
Hysteresis	dB	1, 2, 3	0		
Time To Trigger	s	1, 2, 3	0		
Filter coefficient		1, 2, 3	0		L3 filtering is not used
DRX		1, 2, 3	DRX.1	DRX. 7	
Time offset between serving and neighbour cells		1	3 ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 μs		Synchronous cells
		3	3 μs		Synchronous cells

T1	s	1, 2, 3	5		
T2	s	1, 2, 3	5	10	

Table A.6.6.1.4.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting with per-UE gaps for PCell in FR1 with DRX

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	TN/A		TN/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD		N/A	
		3	CR.2.1 TDD		N/A	
Dedicated CORESET RMC configuration		1	CCR.1.2 FDD		N/A	
		2	CCR.1.2 TDD		N/A	
		3	CCR.2.1 TDD		N/A	
OCNG Patterns		1, 2, 3	OP.1		OP.1	
TRS configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD		N/A	
		3	TRS.1.2 TDD		N/A	
IInitial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3	DLBWP.1.2		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3	ULBWP.1.2		ULBWP.1.1	
RLM-RS		1, 2, 3	CSI-RS		SSB	
N_{oc} Note 2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1	-98			
		2				
		3				
$\hat{E}_s/I_{ot}$	dB	1	4	-1.46	-Infinity	-1.46
		2				
		3				
$\hat{E}_s/N_{oc}$	dB	1	4	4	-Infinity	4
		2				
		3				
SS-RSRP Note 3	dBm/SCS kHz	1	-94	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1	-64.60	-62.25	--64.60	-62.25
	dBm/9.36 MHz	2	-64.60	-62.25	-64.60	-62.25
	dBm/38.16 MHz	3	-58.50	-56.16	--58.50	-56.16

Propagation Condition		1, 2, 3	AWGN

Note 1: Table A.6.6.1.4.2-1The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Table A.6.6.1.4.2-1Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Table A.6.6.1.4.2-1SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.6.6.1.4.2-4: Void

Table A.6.6.1.4.2-5: Void

A.6.6.1.4.3 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 6400 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.1.5 SA event triggered reporting tests without gap under non-DRX with SSB index reading

A.6.6.1.5.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the FDD intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2.

A.6.6.1.5.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for FDD PCell and neighbour cell are given in Table A.6.6.1.5.2-1 and A.6.6.1.5.2-2 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

Table A.6.6.1.5.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode

Table A.6.6.1.5.2-2: General test parameters for SA intra-frequency event triggered reporting without gap for FDD PCell in FR1 with SSB index reading

Parameter	Unit	Test configuration	Value	Comment
Active cell		1	Cell 1	
Neighbour cell		1	Cell 2	Cell to be identified.
RF Channel Number		1	1: Cell 1 and Cell 2	
SSB configuration		1	SSB.1 FR1	
SMTC configuration		1	SMTC.2	
A3-Offset	dB	1	-4.5	
CP length		1	Normal	
Hysteresis	dB	1	0	
Time To Trigger	s	1	0	
Filter coefficient		1	0	L3 filtering is not used
DRX	ms	1		OFF
Time offset between serving and neighbour cells		1	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
T1	s	1	5	
T2	s	1	5	

Table A.6.6.1.5.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting without gap for FDD PCell in FR1 with SSB index reading

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		N/A	
OCNG Patterns		1	OP.1		OP.1	
TRS configuration		1	TRS.1.1 FDD		N/A	
IInitial BWP configuration		1	DLBWP.0,1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1	-98			
N_{oc} Note 2	dBm/15 kHz	1	-98			
$\hat{E}_s / I_{ot}$	dB	1	4	-1.46	-Infinity	-1.46
$\hat{E}_s / N_{oc}$	dB	1	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS kHz	1	-94	-94	-Infinity	-94
Io	dBm/9.36 MHz	1	-64.60	-62.25	--64.60	-62.25
Propagation Condition		1	AWGN			

Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.6.1.5.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE is required to read the neighbour cell SSB index and report the acquired SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.1.6 SA event triggered reporting tests with per-UE gaps under non-DRX with SSB index reading

A.6.6.1.6.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the FDD intra-frequency cell search requirements in clause 9.2.6.2 and 9.2.6.3.

A.6.6.1.6.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for FDD PCell and neighbour cell are given in Table A.6.6.1.6.2-1 and A.6.6.1.6.2-2 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

Table A.6.6.1.6.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode

Table A.6.6.1.6.2-2: General test parameters for SA intra-frequency event triggered reporting with gap for FDD PCell in FR1 with SSB index reading

Parameter	Unit	Test configuration	Value	Comment
Active cell		1	Cell 1	
Neighbour cell		1	Cell 2	Cell to be identified.
RF Channel Number		1	1: Cell 1 and Cell 2	
Measurement gap type		1	Per-UE gaps	

Measurement gap repitition periodicity	ms	1	40	
Measurement gap length	ms	1	6	
Measurement gap offset	ms	1	39	
SSB configuration		1	SSB.1 FR1	
SMTC configuration		1	SMTC.2	
CSI-RS parameters		1	CSI-RS.1.2 FDD resource #0	
A3-Offset	dB	1	-4.5	
CP length		1	Normal	
Hysteresis	dB	1	0	
Time To Trigger	s	1	0	
Filter coefficient		1	0	L3 filtering is not used
DRX	ms	1		OFF
Time offset between serving and neighbour cells		1	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
T1	s	1	5	
T2	s	1	5	

Table A.6.6.1.6.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting with gap for FDD PCell in FR1 with SSB index reading

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
Dedicated CORESET RMC configuration		1	CCR.1.2 FDD		N/A	
OCNG Patterns		1	OP.1		OP.1	
TRS configuration		1	TRS.1.1 FDD		N/A	
IInitial BWP configuration		1	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1	DLBWP.1.2		DLBWP.1.1	
Active UL BWP configuration		1	ULBWP.1.2		ULBWP.1.1	
RLM-RS		1	CSI-RS		SSB	
N_{oc} Note 2	dBm/SCS	1	-98			
N_{oc} Note 2	dBm/15 kHz	1	-98			
$\hat{E}_s/I_{ot}$	dB	1	4	-1.46	-Infinity	-1.46
$\hat{E}_s/N_{oc}$	dB	1	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS kHz	1	-94	-94	-Infinity	-94
Io	dBm/9.36 MHz	1	-64.60	-62.25	--64.60	-62.25
Propagation Condition		1	AWGN			

Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.6.1.6.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE is required to read the neighbour cell SSB index and report the acquired SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.1.7 SA event triggered reporting tests under DRX for UE configured with highSpeedMeasFlag-r16

A.6.6.1.7.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event for UE configured with highSpeedMeasFlag-r16. This test will partly verify the intra-frequency cell search requirements in clauses 9.2.5.1 and 9.2.5.2.

A.6.6.1.7.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for PCell are given in Table A.6.6.1.7.2-1, A.6.6.1.7.2-2 and A.6.6.1.7.2-3 below. In the measurement controlinformation, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furhtermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.6.6.1.7.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.6.6.1.7.2-2: General test parameters for SA intra-frequency event triggered reporting without gap for PCell in FR1 with DRX for UE configured with highSpeedMeasFlag-r16

Parameter	Unit	Test configuration	Value	Comment
highSpeedMeasFlag-r16		1,2,3	Present	To enable high speed measurement enhancements
Active cell		1, 2, 3	Cell 1	
Neighbour cell		1, 2, 3	Cell 2	Cell to be identified.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
A3-Offset	dB	1, 2, 3	-4.5	
CP length		1, 2, 3	Normal	
Hysteresis	dB	1, 2, 3	0	
Time To Trigger	s	1, 2, 3	0	
Filter coefficient		1, 2, 3	0	L3 filtering is not used
DRX		1, 2, 3	DRX.7	640ms DRX cycle
Time offset between serving and neighbour cells		1	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 µs	Synchronous cells
		3	3 µs	Synchronous cells
T1	s	1, 2, 3	5	
T2	s	1, 2, 3	6	

Table A.6.6.1.7.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting without gap for PCell in FR1 with DRX for UE configured with highSpeedMeasFlag-r16

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	TN/A		TN/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		CR.1.1 FDD	
		2	CR.1.1 TDD		CR.1.1 TDD	
		3	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		CCR.1.1 FDD	
		2	CCR.1.1 TDD		CCR.1.1 TDD	
		3	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns		1, 2, 3	OP.1		OP.1	
TRS configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD		N/A	
		3	TRS.1.2 TDD		N/A	

IInitial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2, 3	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1	-98			
		2				
		3				
$\hat{E}_s/I_{ot}$	dB	1	4	-1.46	-Infinity	-1.46
		2				
		3				
$\hat{E}_s/N_{oc}$	dB	1	4	4	-Infinity	4
		2				
		3				
SS-RSRP Note 3	dBm/SCS kHz	1	-94	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1	-64.60	-62.25	-64.60	-62.25
	dBm/9.36 MHz	2	-64.60	-62.25	-64.60	-62.25
	dBm/38.16 MHz	3	-58.50	-56.16	-58.50	-56.16
Propagation Condition		1, 2	AWGN		AWGN 1944Hz Note 4	
		3	AWGN		AWGN 3334Hz Note 5	

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: The AWGN 1944 Hz condition is a non fading propagation channel with one tap. Doppler shift is a constant 1944Hz.

Note 5: The AWGN 3334 Hz condition is a non fading propagation channel with one tap. Doppler shift is a constant 3334Hz.

A.6.6.1.7.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 5120 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.1.8 SA event triggered reporting tests without gap under DRX for UE configured with highSpeedMeasCA-Scell-r17

A.6.6.1.8.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event for UE configured with highSpeedMeasCA-Scell-r17. This test will partly verify the intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2.

A.6.6.1.8.2 Test parameters

Three cells are deployed in the test, which are FR1 PCell (Cell 1), a FR1 deactivated SCell (Cell 2) and a FR1 neighbour cell (Cell 3) on the same frequency as the SCell (Cell 2). The test parameters for PCell are given in Table A.6.6.1.8.21, A.6.6.1.8.2-2 and A.6.6.1.8.2-3 below. In the measurement control information, a measurement object is configured for the frequency of the SCell, and it is indicated to the UE that event-triggered reporting with Event A6 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 3.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furhtermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.6.6.1.8.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.6.6.1.8.2-2: General test parameters for SA intra-frequency event triggered reporting without gap for deactivated SCell in FR1 with DRX highSpeedMeasCA-Scell-r17

Parameter	Unit	Test configuration	Value	Comment
highSpeedMeasCA-Scell-r17		1,2,3	Present	To enable high speed measurement enhancements
Active cell		1, 2, 3	Cell 1	
Deactivated SCell		1, 2, 3	Cell 2	
Neighbour cell		1, 2, 3	Cell 3	Cell to be identified.
RF Channel Number		1, 2, 3	1: Cell 1 2: Cell 2 and 3	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
A6-Offset	dB	1, 2, 3	-4.5	
CP length		1, 2, 3	Normal	
Hysteresis	dB	1, 2, 3	0	
Time To Trigger	s	1, 2, 3	0	
Filter coefficient		1, 2, 3	0	L3 filtering is not used
DRX		1, 2, 3	DRX.6	

measCycleSCell		1, 2, 3	640ms	
Time offset between serving and neighbour cells		1	3 ms	Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		2	3 μs	Synchronous cells
		3	3 μs	Synchronous cells
T1	s	1, 2, 3	5	
T2	s	1, 2, 3	10	

Table A.6.6.1.8.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting without gap for deactivated SCell in FR1 with DRX highSpeedMeasCA-Scell-r17

Parameter	Unit	Test configuration	Cell 1		Cell 2		Cell 3	
TDD configuration		1	N/A		N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A		N/A	
		2	SR.1.1 TDD					
		3	SR.2.1 TDD					
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A		N/A	
		2	CR.1.1 TDD		N/A		N/A	
		3	CR.2.1 TDD		N/A		N/A	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		N/A		N/A	
		2	CCR.1.1 TDD		N/A		N/A	
		3	CCR.2.1 TDD		N/A		N/A	
OCNG Patterns		1, 2, 3	OP.1		OP.1		OP.1	
TRS configuration		1	TRS.1.1 FDD		N/A		N/A	
		2	TRS.1.1 TDD		N/A		N/A	
		3	TRS.1.2 TDD		N/A		N/A	
IInitial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1		DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1		ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2, 3	SSB		SSB		SSB	
N_{oc} Note 2	dBm/SCS	1	-98					
		2	-98					
		3	-95					
N_{oc} Note 2	dBm/15 kHz	1	-98					
		2						
		3						
$\hat{E}_s/I_{ot}$	dB	1	4	-1.46	4	-1.46	-Infinity	-1.46
		2						
		3						
$\hat{E}_s/N_{oc}$	dB	1	4	4	4	4	-Infinity	4
		2						
		3						

SSB_RP Note 3	dBm/SCS kHz	1	-94	-94	-94	-94	-Infinity	-94
		2	-94	-94	-94	-94	-Infinity	-94
		3	-91	-91	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1	-64.60	-62.25	-64.60	-62.25	-64.60	-62.25
	dBm/9.36 MHz	2	-64.60	-62.25	-64.60	-62.25	-64.60	-62.25
	dBm/38.16 MHz	3	-58.50	-56.16	-58.50	-56.16	-58.50	-56.16
Propagation Condition		1,2	AWGN				AWGN 1944Hz Note 4	
		3	AWGN				AWGN 3334Hz Note 5	

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: The AWGN 1944 Hz condition is a non fading propagation channel with one tap. Doppler shift is a constant 1944Hz.
Note 5: The AWGN 3334 Hz condition is a non fading propagation channel with one tap. Doppler shift is a constant 3334Hz.

A.6.6.1.8.3 Test Requirements

The UE shall send one Event A6 triggered measurement report, with a measurement reporting delay less than 5760 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.2 Inter-frequency Measurements

A.6.6.2.1 SA event triggered reporting tests for FR1 without SSB time index detection when DRX is not used

A.6.6.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.6.6.2.1.1-1, A.6.6.2.1.1-2 and A.6.6.2.1.1-3.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.6.6.2.1.1-2 is provided for UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #4 as defined in Table A.6.6.2.1.1-2 is provided for UE that supports per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 2. Otherwise it is only required to pass test 1.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.6.6.2.1.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode

2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.6.6.2.1.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1,2,3	1, 2		Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cell2		NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3	0	4	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	9	9	
SMTC-SSB parameters		Config 1	SSB.1 FR1		As specified in clause A.3.10.1
		Config 2	SSB.1 FR1		As specified in clause A.3.10.1
		Config 3	SSB.2 FR1		As specified in clause A.3.10.1
A3-Offset	dB	Config 1,2,3	-6		
Hysteresis	dB	Config 1,2,3	0		
CP length		Config 1,2,3	Normal		
TimeToTrigger	s	Config 1,2,3	0		
Filter coefficient		Config 1,2,3	0		L3 filtering is not used
DRX		Config 1,2,3	OFF		DRX is not used
Time offset between serving and neighbour cells		Config 1	3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs		Synchronous cells.
T1	s	Config 1,2,3	5		
T2	s	Config 1,2,3	1	1	

Table A.6.6.2.1.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number		Config 1,2,3	1		2	
Duplex mode		Config 1	FDD			
		Config 2,3	TDD			
TDD configuration		Config 1	Not Applicable			
		Config 2	TDDConf.1.1			
		Config 3	TDDConf.2.1			

$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c}$ = 52	
			Config 3	40: $N_{RB,c}$ = 106	
BWP BW		MHz	Config 1,2	10: $N_{RB,c}$ = 52	
			Config 3	40: $N_{RB,c}$ = 106	
BWP configuration	Initial DL BWP		Config 1, 2, 3	DLBWP.0.1	NA
	Initial UL BWP			ULBWP.0.1	NA
	Dedicated DL BWP			DLBWP.1.1	NA
	Dedicated UL BWP			ULBWP.1.1	NA
TRS configuration			Config 1	TRS.1.1 FDD	NA
			Config 2	TRS.1.1 TDD	NA
			Config 3	TRS.1.2 TDD	NA
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1	OP.1
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD	
			Config 2	SR.1.1 TDD	
			Config 3	SR2.1 TDD	
RMSI CORESET Reference Channel			Config 1	CR.1.1 FDD	
			Config 2	CR.1.1 TDD	
			Config 3	CR2.1 TDD	
Dedicated CORESET Reference Channel			Config 1	CCR.1.1 FDD	
			Config 2	CCR.1.1 TDD	
			Config 3	CCR.2.1 TDD	
SSB parameters			Config 1	SSB.1 FR1	SSB.5 FR1
			Config 2	SSB.1 FR1	SSB.5 FR1
			Config 3	SSB.2 FR1	SSB.6 FR1
SMTC configuration defined in A.3.11			Config 1	SMTC.2	SMTC.5
			Config 2, 3	SMTC.1	SMTC.4
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	15	
			Config 3	30	
EPRE ratio of PSS to SSS			Config 1,2,3	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} Note2		dBm/15 kHz		-98	-98
N_{oc} Note2		dBm/SCS	Config 1,2	-98	-98
			Config 3	-95	-95

SS-RSRP Note 3	dBm/SCS	Config 1,2	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3	4	4	-Infinity	7
Io Note3	dBm/9.36MHz	Config 1,2	-64.59	-64.59	-70.05	-62.26
	dBm/38.16MHz	Config 3	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.6.6.2.1.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 760 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2 UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.2.2 SA event triggered reporting tests for FR1 without SSB time index detection when DRX is used

A.6.6.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.6.6.2.2.1-1, A.6.6.2.2.1-2 and A.6.6.2.2.1-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table A.6.6.2.2.1-2 is provided for UE that does not support per-FR gap and in test 3&4 measurement gap pattern configuration #4 as defined in Table A.6.6.2.2.1-2 is provided for UE that supports per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 3&4. Otherwise it is only required to pass test 1&2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.6.6.2.2.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.6.6.2.2.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
NR RF Channel Number		Config 1,2,3	1, 2				Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)				NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cell2				NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3	0		4		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	9		9		
A3-Offset	dB	Config 1,2,3	-6				
Hysteresis	dB	Config 1,2,3	0				
CP length		Config 1,2,3	Normal				
TimeToTrigger	s	Config 1,2,3	0				
Filter coefficient		Config 1,2,3	0				L3 filtering is not used
DRX		Config 1,2,3	DRX .1	DRX . 7	DRX .1	DRX . 7	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1	3ms				Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs				Synchronous cells.
T1	s	Config 1,2,3	5				
T2	s	Config 1,2,3	1.1	11	1.1	11	

Table A.6.6.2.2.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number		Config 1,2,3	1		2	

Duplex mode			Config 1	FDD	
			Config 2,3	TDD	
TDD configuration			Config 1	Not Applicable	
			Config 2	TDDConf.1.1	
			Config 3	TDDConf.2.1	
$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c}$ = 52	
			Config 3	40: $N_{RB,c}$ = 106	
BWP BW		MHz	Config 1,2	10: $N_{RB,c}$ = 52	
			Config 3	40: $N_{RB,c}$ = 106	
BWP configuration	Initial DL BWP		Config 1, 2, 3	DLBWP.0.1	NA
	Initial UL BWP		Config 1, 2, 3	ULBWP.0.1	NA
	Dedicated DL BWP			DLBWP.1.1	NA
	Dedicated UL BWP			ULBWP.1.1	NA
TRS configuration			Config 1	TRS.1.1 FDD	NA
			Config 2	TRS.1.1 TDD	NA
			Config 3	TRS.1.2 TDD	NA
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1	OP.1
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD	NA
			Config 2	SR.1.1 TDD	NA
			Config 3	SR2.1 TDD	NA
RMSI CORESET Reference Channel			Config 1	CR.1.1 FDD	NA
			Config 2	CR.1.1 TDD	NA
			Config 3	CR.2.1 TDD	NA
Dedicated CORESET Reference Channel			Config 1	CCR.1.1 FDD	NA
			Config 2	CCR.1.1 TDD	NA
			Config 3	CCR.2.1 TDD	NA
SSB parameters			Config 1	SSB.1 FR1	SSB.5 FR1
			Config 2	SSB.1 FR1	SSB.5 FR1
			Config 3	SSB.2 FR1	SSB.6 FR1
SMTC configuration defined in A.3.11			Config 1	SMTC.2	SMTC.5
			Config 2, 3	SMTC.1	SMTC.4
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	15	
			Config 3	30	
EPRE ratio of PSS to SSS			Config 1,2,3	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					

N_{oc} Note2	dBm/15 kHz	Config 1,2,3	-98		-98	
N_{oc} Note2	dBm/SCS	Config 1,2	-98		-98	
		Config 3	-95		-95	
SS-RSRP Note 3	dBm/SCS	Config 1,2	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3	4	4	-Infinity	7
Io Note3	dBm/9.36MHz	Config 1,2	-64.59	-64.59	-70.05	-62.2
	dBm/38.16MHz	Config 3	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Table A.6.6.2.2.1-4: DRX-Configuration for SA inter-frequency event triggered reporting without SSB time index detection

Field	Test1&3	Test2&4	Comment
	Value	Value	
drx-onDurationTimer	ms1	ms1	As specified in clause 6.3.2 in TS 38.331 [2]
drx-InactivityTimer	ms1	ms1	
drx-RetransmissionTimerDL	sl1	sl1	
drx-RetransmissionTimerUL	sl1	sl1	
drx-LongCycleStartOffset	ms40	Ms640	
shortDRX	disable	disable	

Table A.6.6.2.2.1-5: *TimeAlignmentTimer* -Configuration SA inter-frequency event triggered reporting without SSB time index detection

Field	Value	Comment
TimeAlignmentTimer	ms500	As specified in clause 6.3.2 in TS 38.331 [2]

A.6.6.2.2.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1080 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 10240 ms from the beginning of time period T2. The UE shall not send event triggered

measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 3 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1080 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 4 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 10240 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1, 2, 3 and 4 UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.2.3 Void

A.6.6.2.4 Void

A.6.6.2.5 SA event triggered reporting tests for FR1 with SSB time index detection when DRX is not used

A.6.6.2.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.6.6.2.5.1-1, A.6.6.2.5.1-2 and A.6.6.2.5.1-3.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.6.6.2.5.1-2 is provided for UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #4 as defined in Table A.6.6.2.5.1-2 is provided for UE that supports per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 2. Otherwise it is only required to pass test 1.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.6.6.2.5.1-1: SA event triggered reporting tests with SSB index reading for FR1-FR1

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.6.6.2.5.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 with SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	

NR RF Channel Number		Config 1,2,3	1, 2		Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cell2		NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3	0	4	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	9	9	
A3-Offset	dB	Config 1,2,3	-6		
Hysteresis	dB	Config 1,2,3	0		
CP length		Config 1,2,3	Normal		
TimeToTrigger	s	Config 1,2,3	0		
Filter coefficient		Config 1,2,3	0		L3 filtering is not used
DRX		Config 1,2,3	OFF		DRX is not used
Time offset between serving and neighbour cells		Config 1	3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs		Synchronous cells.
T1	s	Config 1,2,3	5		
T2	s	Config 1,2,3	1.1	1	

Table A.6.6.2.5.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 with SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2	
Duplex mode			Config 1	FDD			
			Config 2,3	TDD			
TDD configuration			Config 1	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c}$ = 52			
			Config 3	40: $N_{RB,c}$ = 106			
BWP BW		MHz	Config 1,2	10: $N_{RB,c}$ = 52			
			Config 3	40: $N_{RB,c}$ = 106			
BWP configuration	Initial DL BWP		Config 1, 2, 3	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	
			Config 3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD			
			Config 2	SR.1.1 TDD			
			Config 3	SR2.1 TDD			

RMSI CORESET Reference Channel		Config 1	CR.1.1 FDD		-	
		Config 2	CR.1.1 TDD			
		Config 3	CR2.1 TDD			
Dedicated CORESET Reference Channel		Config 1	CCR.1.1 FDD		-	
		Config 2	CCR.1.1 TDD			
		Config 3	CCR.2.1 TDD			
SSB parameters		Config 1	SSB.1 FR1		SSB.5 FR1	
		Config 2	SSB.1 FR1		SSB.5 FR1	
		Config 3	SSB.2 FR1		SSB.6 FR1	
SMTC configuration defined in A.3.11		Config 1	SMTC.2		SMTC.5	
		Config 2, 3	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2	15			
		Config 3	30			
EPRE ratio of PSS to SSS		Config 1,2,3	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15 kHz		-98		-98	
N_{oc} Note2	dBm/SCS	Config 1,2	-98		-98	
		Config 3	-95		-95	
SS-RSRP Note 3	dBm/SCS	Config 1,2	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3	4	4	-Infinity	7
Io Note3	dBm/9.36MHz	Config 1,2	-64.59	-64.59	-70.05	-62.2
	dBm/38.16MHz	Config 3	-58.4	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.6.6.2.5.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1040 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 880 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2 UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.2.6 SA event triggered reporting tests for FR1 with SSB time index detection when DRX is used

A.6.6.2.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.6.6.2.6.1-1, A.6.6.2.6.1-2 and A.6.6.2.6.1-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table A.6.6.2.6.1-2 is provided for UE that does not support per-FR gap and in test 3&4 measurement gap pattern configuration #4 as defined in Table A.6.6.2.6.1-2 is provided for UE that supports per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 3&4. Otherwise it is only required to pass test 1&2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.6.6.2.6.1-1: SA event triggered reporting tests with SSB index reading for FR1-FR1

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.6.6.2.6.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 with SSB time index detection

Parameter	Unit	Test configuration	Value				Comment
			Test 1	Test 2	Test 3	Test 4	

NR RF Channel Number		Config 1,2,3	1, 2				Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)				NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cell2				NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3	0		4		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	9		9		
A3-Offset	dB	Config 1,2,3	-6				
Hysteresis	dB	Config 1,2,3	0				
CP length		Config 1,2,3	Normal				
TimeToTrigger	s	Config 1,2,3	0				
Filter coefficient		Config 1,2,3	0				L3 filtering is not used
DRX		Config 1,2,3	DRX .1	DRX . 7	DRX .1	DRX . 7	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1	3 ms				Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3 μs				Synchronous cells.
T1	s	Config 1,2,3	5				
T2	s	Config 1,2,3	1.3	13.5	1.3	13.5	

Table A.6.6.2.6.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 with SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2	
Duplex mode			Config 1	FDD			
			Config 2,3	TDD			
TDD configuration			Config 1	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c}$ = 52			
			Config 3	40: $N_{RB,c}$ = 106			
BWP BW		MHz	Config 1,2	10: $N_{RB,c}$ = 52			
			Config 3	40: $N_{RB,c}$ = 106			
BWP configuration	Initial DL BWP		Config 1, 2, 3	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	
			Config 3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD		NA	
			Config 2	SR.1.1 TDD			
			Config 3	SR2.1 TDD			

RMSI CORESET Reference Channel		Config 1	CR.1.1 FDD		-	
		Config 2	CR.1.1 TDD			
		Config 3	CR2.1 TDD			
Dedicated CORESET Reference Channel		Config 1	CCR.1.1 FDD		-	
		Config 2	CCR.1.1 TDD			
		Config 3	CCR.2.1 TDD			
SSB parameters		Config 1	SSB.1 FR1		SSB.5 FR1	
		Config 2	SSB.1 FR1		SSB.5 FR1	
		Config 3	SSB.2 FR1		SSB.6 FR1	
SMTC configuration defined in A.3.11		Config 1	SMTC.2		SMTC.5	
		Config 2, 3	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2	15			
		Config 3	30			
EPRE ratio of PSS to SSS		Config 1,2,3	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15 kHz		-98		-98	
N_{oc} Note2	dBm/SCS	Config 1,2	-98		-98	
		Config 3	-95		-95	
SS-RSRP Note 3	dBm/SCS	Config 1,2	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s / I_{\alpha}$	dB	Config 1,2,3	4	4	-Infinity	7
$\hat{E}_s / N_{oc}$	dB	Config 1,2,3	4	4	-Infinity	7
Io Note3	dBm/9.36MHz	Config 1,2	-64.59	-64.59	-70.05	-62.26
	dBm/38.16MHz	Config 3	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.6.6.2.6.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1280 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 12160 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 3 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1280 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 4 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 12160 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1, 2, 3 and 4 UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.2.7 Void

A.6.6.2.8 Void

A.6.6.2.9 SA event triggered reporting tests with additional mandatory gap pattern

A.6.6.2.9.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event when mandatory gap pattern with 3ms MGL is configured.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.6.6.2.9.1-1, A.6.6.2.9.1-2 and A.6.6.2.9.1-3.

In test 1 measurement gap pattern configuration # 3 as defined in Table A.6.6.2.9.1-2 is provided for UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #2 as defined in Table A.6.6.2.9.1-2 is provided for UE that supports per-FR gap. If a UE supports per-FR gap and gap pattern configuration #2, it is only required to pass test 2. Otherwise it is only required to pass test 1.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.6.6.2.9.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.6.6.2.9.1-2: General test parameters for SA inter-frequency event triggered reporting with additional mandatory gap pattern

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1,2,3	1, 2		Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cell2		NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3	3	2	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	9	9	
SMTC-SSB parameters		Config 1	SSB.1 FR1		As specified in clause A.3.10.1
		Config 2	SSB.1 FR1		As specified in clause A.3.10.1
		Config 3	SSB.2 FR1		As specified in clause A.3.10.1
A3-Offset	dB	Config 1,2,3	-6		
Hysteresis	dB	Config 1,2,3	0		
CP length		Config 1,2,3	Normal		
TimeToTrigger	s	Config 1,2,3	0		
Filter coefficient		Config 1,2,3	0		L3 filtering is not used
DRX		Config 1,2,3	OFF		DRX is not used
Time offset between serving and neighbour cells		Config 1	3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs		Synchronous cells.
T1	s	Config 1,2,3	5		
T2	s	Config 1,2,3	1	1	

Table A.6.6.2.9.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting with additional mandatory gap pattern

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2	
Duplex mode			Config 1	FDD			
			Config 2,3	TDD			
TDD configuration			Config 1	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c}$ = 52			
			Config 3	40: $N_{RB,c}$ = 106			
BWP BW		MHz	Config 1,2	10: $N_{RB,c}$ = 52			
			Config 3	40: $N_{RB,c}$ = 106			
	Initial DL BWP		Config 1, 2, 3	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	

BWP configuration	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	
			Config 3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD			
			Config 2	SR.1.1 TDD			
			Config 3	SR2.1 TDD			
CORESET Reference Channel			Config 1	CR.1.1 FDD			
			Config 2	CR.1.1 TDD			
			Config 3	CR2.1 TDD			
SSB parameters			Config 1	SSB.1 FR1		SSB.5 FR1	
			Config 2	SSB.1 FR1		SSB.5 FR1	
			Config 3	SSB.2 FR1		SSB.6 FR1	
SMTC configuration defined in A.3.11			Config 1	SMTC.1		SMTC.4	
			Config 2, 3	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	15			
			Config 3	30			
EPRE ratio of PSS to SSS			Config 1,2,3	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS (Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		dBm/15 kHz		-98		-98	
N_{oc} Note2		dBm/SCS	Config 1,2	-98		-98	
			Config 3	-95		-95	
SS-RSRP Note 3		dBm/SCS	Config 1,2	-94	-94	-Infinity	-91
			Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$		dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$		dB	Config 1,2,3	4	4	-Infinity	7
Io Note3		dBm/9.36MHz	Config 1,2	-64.59	-64.59	-70.05	-62.26
		dBm/38.16MHz	Config 3	-58.49	-58.49	-63.94	-56.15
Propagation Condition			Config 1,2,3	AWGN		AWGN	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.6.6.2.9.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1280 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2 UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.2.10 SA event triggered reporting tests for FR1 when DRX is used

A.6.6.2.10.1 Test Purpose and Environment

The purpose of this test is to verify that the UE which supports interFrequencyMeas-Nogap-r16 makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search without measurement gap requirements in clause 9.3.9.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on RF channel 2. The SSB of cell 2 is completely within UE's active BWP BW. The RBs containing SSB from cell 1 and cell 2 should be different in frequency location within the cell bandwidth. The test parameters are given in Tables A.6.6.2.10.1-1, A.6.6.2.10.1-2 and A.6.6.2.10.1-3.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.6.6.2.10.1-1: SA event triggered reporting tests when DRX is used for FR1-FR1

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.6.6.2.10.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 when DRX is used

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2,3	1, 2	Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cell2	NR cell 2 is on NR RF channel number 2.
A3-Offset	dB	Config 1,2,3	-6	
Hysteresis	dB	Config 1,2,3	0	
CP length		Config 1,2,3	Normal	
TimeToTrigger	s	Config 1,2,3	0	
Filter coefficient		Config 1,2,3	0	L3 filtering is not used
DRX		Config 1,2,3	DRX.1	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs	Synchronous cells.
T1	s	Config 1,2,3	5	
T2	s	Config 1,2,3	1	

Table A.6.6.2.10.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 when DRX is used

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2	
Duplex mode			Config 1	FDD			
			Config 2,3	TDD			
TDD configuration			Config 1	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c}$ = 52			
			Config 3	40: $N_{RB,c}$ = 106			
BWP BW		MHz	Config 1,2	10: $N_{RB,c}$ = 52			
			Config 3	40: $N_{RB,c}$ = 106			
BWP configuration	Initial DL BWP		Config 1, 2, 3	DLBWP.0.1		NA	
	Initial UL BWP		Config 1, 2, 3	ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1	TRS.1.1 FDD		NA	

		Config 2	TRS.1.1 TDD		NA	
		Config 3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		Config 1,2,3	OP.1		OP.1	
PDSCH Reference measurement channel		Config 1	SR.1.1 FDD		NA	
		Config 2	SR.1.1 TDD		NA	
		Config 3	SR2.1 TDD		NA	
CORESET Reference Channel		Config 1	CR.1.1 FDD		NA	
		Config 2	CR.1.1 TDD		NA	
		Config 3	CR2.1 TDD		NA	
SSB parameters		Config 1	SSB.1 FR1		SSB.5 FR1	
		Config 2	SSB.1 FR1		SSB.5 FR1	
		Config 3	SSB.2 FR1		SSB.6 FR1	
SMTC configuration defined in A.3.11		Config 1	SMTC.2		SMTC.5	
		Config 2, 3	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2	15			
		Config 3	30			
EPRE ratio of PSS to SSS		Config 1,2,3	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS (Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15 kHz	Config 1,2,3	-98		-98	
N_{oc} Note2	dBm/SCS	Config 1,2	-98		-98	
		Config 3	-95		-95	
SS-RSRP Note 3	dBm/SCS	Config 1,2	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3	4	4	-Infinity	7
Io Note3	dBm/9.36MHz	Config 1,2	-64.59	-64.59	-70.05	-62.2
	dBm/38.16MHz	Config 3	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3	AWGN		AWGN	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Table A.6.6.2.10.1-4: *TimeAlignmentTimer* -Configuration SA inter-frequency event triggered reporting when DRX is used

Field	Value	Comment
TimeAlignmentTimer	ms500	As specified in clause 6.3.2 in TS 38.331 [2]

A.6.6.2.10.2 Test Requirements

In test config 1, UE is required to report SSB time index. UE is not required to report SSB time index. The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1080 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test config 2 and 3, UE is not required to report SSB time index. The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 900 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.2.11 SA event triggered reporting tests for FR1 without gap when DRX is not used

A.6.6.2.11.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.9.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The SSB of Cell 2 is completely within UE's active BWP BW. The RBs containing SSB from cell 1 and cell 2 should be different in frequency location within the cell bandwidth. The test parameters are given in Tables A.6.6.2.11.1-1, A.6.6.2.11.1-2 and A.6.6.2.11.1-3.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.6.6.2.11.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode

3	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.6.6.2.11.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 without gap

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2,3	1, 2	Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cell2	NR cell 2 is on NR RF channel number 2.
A3-Offset	dB	Config 1,2,3	-6	
Hysteresis	dB	Config 1,2,3	0	
CP length		Config 1,2,3	Normal	
TimeToTrigger	s	Config 1,2,3	0	
Filter coefficient		Config 1,2,3	0	L3 filtering is not used
DRX		Config 1,2,3	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs	Synchronous cells.
T1	s	Config 1,2,3	5	
T2	s	Config 1,2,3	1	

Table A.6.6.2.11.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 without gap

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2	
Duplex mode			Config 1	FDD			
			Config 2,3	TDD			
TDD configuration			Config 1	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c}$ = 52			
			Config 3	40: $N_{RB,c}$ = 106			
BWP BW		MHz	Config 1,2	10: $N_{RB,c}$ = 52			
			Config 3	40: $N_{RB,c}$ = 106			
BWP configuration	Initial DL BWP		Config 1, 2, 3	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1	TRS.1.1 FDD		NA	

		Config 2	TRS.1.1 TDD		NA	
		Config 3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		Config 1,2,3	OP.1		OP.1	
PDSCH Reference measurement channel		Config 1	SR.1.1 FDD			
		Config 2	SR.1.1 TDD			
		Config 3	SR2.1 TDD			
CORESET Reference Channel		Config 1	CR.1.1 FDD			
		Config 2	CR.1.1 TDD			
		Config 3	CR2.1 TDD			
SSB parameters		Config 1	SSB.1 FR1		SSB.5 FR1	
		Config 2	SSB.1 FR1		SSB.5 FR1	
		Config 3	SSB.2 FR1		SSB.6 FR1	
SMTC configuration defined in A.3.11		Config 1	SMTC.2		SMTC.5	
		Config 2, 3	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2	15			
		Config 3	30			
EPRE ratio of PSS to SSS		Config 1,2,3	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15 kHz		-98		-98	
N_{oc} Note2	dBm/SCS	Config 1,2	-98		-98	
		Config 3	-95		-95	
SS-RSRP Note 3	dBm/SCS	Config 1,2	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3	4	4	-Infinity	7
Io Note3	dBm/9.36MHz	Config 1,2	-64.59	-64.59	-70.05	-62.26
	dBm/38.16MHz	Config 3	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3	AWGN		AWGN	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.6.6.2.11.2 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 800 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

The UE is not required to read the neighbour cell SSB index in this test.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.2.12 SA event triggered reporting tests for FR1 without SSB time index detection when DRX is used for UE configured with highSpeedMeasInterFreq-r17

A.6.6.2.12.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event when UE is configured with *highSpeedMeasInterFreq-r17*. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.6.6.2.12.1-1, A.6.6.2.12.1-2 and A.6.6.2.12.1-3.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.6.6.2.12.1-2 is provided for UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #4 as defined in Table A.6.6.2.12.1-2 is provided for UE that supports per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 1. Otherwise it is only required to pass test 1.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.6.6.2.12.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell

Table A.6.6.2.12.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection for UE configured with *highSpeedMeasInterFreq-r17*

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1,2,3	1, 2		Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cell2		NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3	0	4	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	9	9	
A3-Offset	dB	Config 1,2,3	-6		
Hysteresis	dB	Config 1,2,3	0		
CP length		Config 1,2,3	Normal		
TimeToTrigger	s	Config 1,2,3	0		
Filter coefficient		Config 1,2,3	0		L3 filtering is not used
DRX		Config 1,2,3	DRX.4		As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1	3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs		Synchronous cells.
T1	s	Config 1,2,3	5		
T2	s	Config 1,2,3	2.3	2.3	

Table A.6.6.2.12.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection for UE configured with *highSpeedMeasInterFreq-r17*

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number		Config 1,2,3	1		2	
Duplex mode		Config 1	FDD			
		Config 2,3	TDD			
TDD configuration		Config 1	Not Applicable			
		Config 2	TDDConf.1.1			
		Config 3	TDDConf.2.1			
$BW_{channel}$	MHz	Config 1,2	10: $N_{RB,c}$ = 52			
		Config 3	40: $N_{RB,c}$ = 106			
BWP BW	MHz	Config 1,2	10: $N_{RB,c}$ = 52			
		Config 3	40: $N_{RB,c}$ = 106			

BWP configuration	Initial DL BWP		Config 1, 2, 3	DLBWP.0.1	NA
	Initial UL BWP		Config 1, 2, 3	ULBWP.0.1	NA
	Dedicated DL BWP			DLBWP.1.1	NA
	Dedicated UL BWP			ULBWP.1.1	NA
TRS configuration			Config 1	TRS.1.1 FDD	NA
			Config 2	TRS.1.1 TDD	NA
			Config 3	TRS.1.2 TDD	NA
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1	OP.1
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD	NA
			Config 2	SR.1.1 TDD	NA
			Config 3	SR2.1 TDD	NA
RMSI CORESET Reference Channel			Config 1	CR.1.1 FDD	NA
			Config 2	CR.1.1 TDD	NA
			Config 3	CR.2.1 TDD	NA
Dedicated CORESET Reference Channel			Config 1	CCR.1.1 FDD	NA
			Config 2	CCR.1.1 TDD	NA
			Config 3	CCR.2.1 TDD	NA
SSB parameters			Config 1	SSB.1 FR1	SSB.5 FR1
			Config 2	SSB.1 FR1	SSB.5 FR1
			Config 3	SSB.2 FR1	SSB.6 FR1
SMTC configuration defined in A.3.11			Config 1	SMTC.2	SMTC.5
			Config 2, 3	SMTC.1	SMTC.4
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	15	
			Config 3	30	
EPRE ratio of PSS to SSS			Config 1,2,3	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} Note2		dBm/15 kHz	Config 1,2,3	-98	-98
N_{oc} Note2		dBm/SCS	Config 1,2	-98	-98
			Config 3	-95	-95

SS-RSRP Note 3	dBm/SCS	Config 1,2	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3	4	4	-Infinity	7
Io Note3	dBm/9.36MHz	Config 1,2	-64.59	-64.59	-70.05	-62.2
	dBm/38.16MHz	Config 3	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2	AWGN		AWGN 1944Hz Note 5	
		Config 3	AWGN		AWGN 3334Hz Note 6	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: The AWGN 1944 Hz condition is a non fading propagation channel with one tap. Doppler shift is a constant 1944Hz.

Note 6: The AWGN 3334 Hz condition is a non fading propagation channel with one tap. Doppler shift is a constant 3334Hz.

A.6.6.2.12.2 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 2240 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 2240 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1&2, UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.3 Inter-RAT Measurements

A.6.6.3.1 SA NR - E-UTRAN event-triggered reporting in non-DRX in FR1

A.6.6.3.1.1 Test Purpose and Environment

The purpose of this set of tests is to verify that the UE makes correct event-triggered reporting of inter-RAT E-UTRAN measurements when operating in standalone (SA) operation with PCell in FR1. This test shall partly verify the cell search and measurement requirements in Clauses 9.4.2 and 9.4.3.

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the NR PCell and Cell 2 is an inter-RAT E-UTRAN inter-RAT neighbour cell. In the measurement control information from the PCell it is indictated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) is to be used. Each test consists of two consecutive time periods, with durations T1 and T2, respectively. Prior to the start of time duration T1, the UE shall be fully synchronized to Cell 1. During T1, the UE shall not have any information on Cell 2.

Supported test configurations are shown in table A.6.6.3.1.1-1. General test parameters are provided in Table A.6.6.3.1.1-2 below. Test parameters for Cell 1 and Cell 2, valid for both time duration T1 and T2, are provided in Tables A.6.6.3.1.1-3 and A.6.6.3.1.1-4, respectively.

Table A.6.6.3.1.1-1: Supported test configurations in SA inter-RAT E-UTRAN event triggered reporting in non-DRX with PCell in FR1

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.6.3.1.1-2: General test parameters for SA inter-RAT E-UTRAN event triggered reporting in non-DRX with PCell in FR1

Parameter	Unit	Value	Comment
NR RF Channel Number		1	1 NR carrier frequency is used in the test
LTE RF Channel Number		1	1 LTE carrier frequency is used in the test
Channel Bandwidth	MHz	As specified in Tables A.6.6.3.1.1-2 and A.6.6.3.1.1-3.	
Active cell		Cell 1	Cell 1 is on RF channel number 1
Neighbour cell		Cell 2	Cell 2 is on RF channel number 2
Gap Pattern Id		0	As specified in Clause Table 9.1.2-1. Per-UE gap pattern.
NR measurement quantity		SS-RSRP	Measurement quantity for Cell 1
Inter-RAT E-UTRAN measurement quantity		RSRP	Measurement quantity for Cell 2
b2-Threshold1	dBm	Note 1	SS-RSRP threshold for SS-RSRP measurement on cell1 for event B2
b2-Threshold2EUTRA	dBm	-95	E-UTRAN RSRP threshold for SS-RSRP measurement on cell1 for event B2
Hysteresis	dB	0	
TimeToTrigger	s	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	OFF
T1	s	5	
T2	s	5	
Note 1: Values are defined in Table A.6.6.3.1.1-3			

Table A.6.6.3.1.1-3: PCell specific test parameters for SA inter-RAT E-UTRA event triggered reporting in non-DRX with PCell in FR1

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6	1	

Duplex mode			1, 2, 3	FDD	
			4, 5, 6	TDD	
TDD Configuration	SCS=15 KHz		2, 5	TDDConf.1.1	
	SCS=30 KHz		3, 6	TDDConf.2.1	
$BW_{channel}$		MHz	1, 4	10: $N_{RB,c}$ = 52 (FDD)	
			2, 5	10: $N_{RB,c}$ = 52 (TDD)	
			3, 6	40: $N_{RB,c}$ = 106 (TDD)	
PDSCH reference measurement channel			1, 4	SR.1.1 FDD	
			2, 5	SR.1.1 TDD	
			3, 6	SR.2.1 TDD	
RMSI CORSET reference channel			1, 4	CR.1.1 FDD	
			2, 5	CR.1.1 TDD	
			3, 6	CR.2.1 TDD	
Dedicated CORSET reference channel			1, 4	CCR.1.1 FDD	
			2, 5	CCR.1.1 TDD	
			3, 6	CCR.2.1 TDD	
BWP configurations	Initial DL BWP		1, 2, 3, 4, 5, 6	DLBWP.0.1	
	Dedicated DL BWP		1, 2, 3, 4, 5, 6	DLBWP.1.1	
	Initial UL BWP		1, 2, 3, 4, 5, 6	ULBWP.0.1	
	Dedicated UL BWP		1, 2, 3, 4, 5, 6	ULBWP.1.1	
OCNG pattern[Note1]			1, 2, 3, 4, 5, 6	OP.1	
SMTC configuration			1, 2, 3, 4, 5, 6	SMTC.1	
SSB configuration			1, 2, 4, 5	SSB.1 FR1	
			3, 6	SSB.2 FR1	
CSI-RS for tracking			1, 4	TRS.1.1 FDD	
			2, 5	TRS.1.1 TDD	
			3, 6	TRS.1.2 TDD	
b2-Threshold1		dBm	1, 2, 4, 5	--96	
			3, 6	--93	
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4, 5, 6	0	
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS					
EPRE ratio of OCNG to OCNG DMRS					
N_{oc}[Note2]		dBm/15 KHz	1, 2, 3, 4, 5, 6	-104	
N_{oc}[Note2]		dBm/SCS	1, 2, 4, 5	-104	
			3, 6	-101	
$\hat{E}_s/N_{oc}$		dB	1, 2, 3, 4, 5, 6	16	0
$\hat{E}_s/I_{ot}$[Note3]		dB	1, 2, 3, 4, 5, 6	16	0
SS-RSRP[Note3]		dBm/SCS	1, 2, 4, 5	-88	-104
			3, 6	-85	-101
SSB_RP[Note3]		dBm/SCS	1, 2, 4, 5	-88	-104
			3, 6	-85	-101
Io[Note3]		dBm/9.36 MHz	1, 2, 4, 5	-59.94	-73.04
		dBm/38.16 MHz	3, 6	-53.84	-66.93
Propagation condition			1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix			1, 2, 3, 4, 5, 6	1x2	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.6.6.3.1.1-4: E-UTRAN neighbour cell specific test parameters for SA inter-RAT E-UTRAN event triggered reporting in non-DRX with PCell in FR1

Parameter	Unit	Configuration	Cell 2	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6	1	
Duplex mode		1, 2, 3	FDD	
		4, 5, 6	TDD	
TDD special subframe configuration[Note1]		4, 5, 6	6	
TDD uplink-downlink configuration[Note1]		4, 5, 6	1	
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]		1, 2, 3	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note3]				
OCNG_RB[Note3]				
N_{oc}[Note4]	dBm/15kHz	1, 2, 3, 4, 5, 6	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	-Infinity	17
$\hat{E}_s/I_{ot}$[Note5]	dB	1, 2, 3, 4, 5, 6	-Infinity	17

RSRP[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-87
SCH_RP[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-87
Io[Note5]	dBm/9MHz	1, 2, 3, 4, 5, 6	-73.21+10log ($N_{RB,c}$ /50)	-56.12+10log ($N_{RB,c}$ /50)
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x2	
Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23]. Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively. Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

A.6.6.3.1.2 Test Requirements

The UE shall send one Event B2 triggered measurement report for Cell 2 to the PCell, with a measurement reporting delay less than 3.84s from the start of period T2. The measurement reporting delay is defined as the time from the beginning of time period T2 to the moment when the UE sends the measurement report on PUSCH.

The UE shall not send event-triggered measurement reports as long as the reporting criteria is not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.6.3.2 SA NR - E-UTRAN event-triggered reporting in DRX in FR1

A.6.6.3.2.1 Test Purpose and Environment

The purpose of this set of tests is to verify that the UE makes correct event-triggered reporting of inter-RAT E-UTRAN measurements when operating in standalone (SA) operation with PCell in FR1 when DRX is used. This test shall partly verify the cell search and measurement requirements in Clauses 9.4.2 and 9.4.3. There are two test cases. In test 1 the UE shall be configured with DRX cycle of 40 ms. In test 2 the UE shall be configured with DRX cycle of 640 ms.

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the NR PCell and Cell 2 is an inter-RAT E-UTRAN inter-RAT neighbour cell. In the measurement control information from the PCell it is indctated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) is to be used. Each test consists of two consecutive time periods, with durations T1 and T2, respectively. Prior to the start of time duration T1, the UE shall be fully synchronized to Cell 1. During T1, the UE shall not have any information on Cell 2.

In each test the UE shall be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore the UE shall be allocated with PUSCH resource at every DRX cycle.

Supported test configurations are shown in table A.6.6.3.2.1-1. General test parameters are provided in Table A.6.6.3.2.1-2 below. Test parameters for Cell 1 and Cell 2, valid for both time duration T1 and T2, are provided in Tables A.6.6.3.2.1-3 and A.6.6.3.2.1-4, respectively.

Table A.6.6.3.2.1-1: Supported test configurations in SA inter-RAT E-UTRAN event triggered reporting in DRX with PCell in FR1

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE FDD

4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.6.3.2.1-2: General test parameters for SA inter-RAT E-UTRAN event triggered reporting in DRX with PCell in FR1

Parameter	Unit	Test 1	Test 2	Comment
		Value		
NR RF Channel Number		1		1 NR carrier frequency is used in the test
LTE RF Channel Number		2		1 LTE carrier frequency is used in the test
Channel Bandwidth	MHz	As specified in Tables A.6.6.3.2.1-2 and A.6.6.3.2.1-3.		
Active cell		Cell 1		Cell 1 is on RF channel number 1
Neighbour cell		Cell 2		Cell 2 is on RF channel number 2
Gap Pattern Id		0		As specified in Clause Table 9.1.2-1. Per-UE gap pattern.
NR measurement quantity		SS-RSRP		Measurement quantity for Cell 1
Inter-RAT E-UTRAN measurement quantity		RSRP		Measurement quantity for Cell 2
b2-Threshold1	dBm	Note 1		SS-RSRP threshold for SS-RSRP measurement on cell1 for event B2
b2-Threshold2EUTRA	dBm	-95		E-UTRAN RSRP threshold for SS-RSRP measurement on cell1 for event B2
Hysteresis	dB	0		
TimeToTrigger	s	0		
Filter coefficient		0		L3 filtering is not used
DRX		DRX.1	DRX. 7	DRX cycle configurations DRX.1 and DRX. 7 are defined in Table A.3.3.1-1 and Table A.3.3. 7-1 respectively.
T1	s	5		
T2	s	5	15	
Note 1: Values are defined in Table A.6.6.3.2.1-3				

Table A.6.6.3.2.1-3: PCell specific test parameters for SA inter-RAT E-UTRA event triggered reporting in DRX with PCell in FR1

Parameter		Unit	Configuration	Cell 1	
				T1	T2
RF channel number			1, 2, 3, 4, 5, 6	1	
Duplex mode			1, 2, 3	FDD	
			4, 5, 6	TDD	
TDD Configuration	SCS=15 KHz		2, 5	TDDConf.1.1	
	SCS=30 KHz		3, 6	TDDConf.2.1	
$BW_{channel}$		MHz	1, 4	10: $N_{RB,c}$ = 52 (FDD)	
			2, 5	10: $N_{RB,c}$ = 52 (TDD)	
			3, 6	40: $N_{RB,c}$ = 106 (TDD)	
PDSCH reference measurement channel			1, 4	SR.1.1 FDD	
			2, 5	SR.1.1 TDD	
			3, 6	SR.2.1 TDD	
RMSI CORSET reference channel			1, 4	CR.1.1 FDD	
			2, 5	CR.1.1 TDD	
			3, 6	CR.2.1 TDD	
Dedicated CORSET reference channel			1, 4	CCR.1.1 FDD	
			2, 5	CCR.1.1 TDD	

			3, 6	CCR.2.1 TDD	
BWP configurations	Initial DL BWP		1, 2, 3, 4, 5, 6	DLBWP.0.1	
	Dedicated DL BWP		1, 2, 3, 4, 5, 6	DLBWP.1.1	
	Initial UL BWP		1, 2, 3, 4, 5, 6	ULBWP.0.1	
	Dedicated UL BWP		1, 2, 3, 4, 5, 6	ULBWP.1.1	
OCNG pattern[Note1]			1, 2, 3, 4, 5, 6	OP.1	
SMTC configuration			1, 2, 3, 4, 5, 6	SMTC.1	
SSB configuration			1, 2, 4, 5	SSB.1 FR1	
			3, 6	SSB.2 FR1	
CSI-RS for tracking			1, 4	TRS.1.1 FDD	
			2, 5	TRS.1.1 TDD	
			3, 6	TRS.1.2 TDD	
b2-Threshold1		dBm	1, 2, 4, 5	-96	
			3, 6	-93	
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4, 5, 6	0	
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS					
EPRE ratio of OCNG to OCNG DMRS					
N_{oc}[Note2]		dBm/15 KHz	1, 2, 3, 4, 5, 6	-104	
N_{oc}[Note2]		dBm/SCS	1, 2, 4, 5	-104	
			3, 6	-101	
$\hat{E}_s/N_{oc}$		dB	1, 2, 3, 4, 5, 6	16	0
$\hat{E}_s/I_{ot}$[Note3]		dB	1, 2, 3, 4, 5, 6	16	0
SS-RSRP[Note3]		dBm/SCS	1, 2, 4, 5	-88	-104
			3, 6	-85	-101
SSB_RP[Note3]		dBm/SCS	1, 2, 4, 5	-88	-104
			3, 6	-85	-101
Io[Note3]		dBm/9.36 MHz	1, 2, 4, 5	-59.94	-73.04
		dBm/38.16 MHz	3, 6	-53.84	-66.93
Propagation condition			1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix			1, 2, 3, 4, 5, 6	1x2	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.6.6.3.2.1-4: E-UTRAN neighbour cell specific test parameters for SA inter-RAT E-UTRAN event triggered reporting in DRX with PCell in FR1

Parameter	Unit	Configuration	Cell 2	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6	2	

Duplex mode		1, 2, 3	FDD	
		4, 5, 6	TDD	
TDD special subframe configuration[Note1]		4, 5, 6	6	
TDD uplink-downlink configuration[Note1]		4, 5, 6	1	
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]		1, 2, 3	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note3]				
OCNG_RB[Note3]				
N_{oc}[Note4]	dBm/15kHz	1, 2, 3, 4, 5, 6	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	-Infinity	17
$\hat{E}_s/I_{ot}$[Note5]	dB	1, 2, 3, 4, 5, 6	-Infinity	17
RSRP[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-87
SCH_RP[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-87
Io[Note5]	dBm/9MHz	1, 2, 3, 4, 5, 6	-73.21+10log ($N_{RB,c}$ /50)	-56.12+10log ($N_{RB,c}$ /50)
Propagation Condition [Note6]		1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix [Note6]		1, 2, 3, 4, 5, 6	1x2	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].

A.6.6.3.2.2 Test Requirements

In test 1, the UE shall send one Event B2 triggered measurement report for Cell 2 to the PCell, with a measurement reporting delay less than 3.84s from the start of period T2. The measurement reporting delay is defined as the time from the beginning of time period T2 to the moment when the UE sends the measurement report on PUSCH.

In test 2, the UE shall send one Event B2 triggered measurement report for Cell 2 to the PCell, with a measurement reporting delay less than 12.8s from the start of period T2. The measurement reporting delay is defined as the time from the beginning of time period T2 to the moment when the UE sends the measurement report on PUSCH.

The UE shall not send event-triggered measurement reports as long as the reporting criteria is not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.6.3.3 SA NR - E-UTRAN event-triggered reporting in DRX in FR1 for UE configured with highSpeedMeasFlag-r16

A.6.6.3.3.1 Test Purpose and Environment

The purpose of this set of tests is to verify that the UE makes correct event-triggered reporting of inter-RAT E-UTRAN measurements for UE configured with highSpeedMeasFlag-r16 in standalone (SA) operation with PCell in FR1 when DRX is used. This test shall partly verify the cell search and measurement requirements in Clauses 9.4.2 and 9.4.3.

In the test there are two cells: Cell 1 and Cell 2. Cell 1 is the NR PCell and Cell 2 is an inter-RAT E-UTRAN inter-RAT neighbour cell. In the measurement control information from the PCell it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) is to be used. Each test consists of two consecutive time periods, with durations T1 and T2, respectively. Prior to the start of time duration T1, the UE shall be fully synchronized to Cell 1. During T1, the UE shall not have any information on Cell 2.

The UE shall be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore the UE shall be allocated with PUSCH resource at every DRX cycle.

Supported test configurations are shown in table A.6.6.3.3.1-1. General test parameters are provided in Table A.6.6.3.3.1-2 below. Test parameters for Cell 1 and Cell 2, valid for both time duration T1 and T2, are provided in Tables A.6.6.3.3.1-3 and A.6.6.3.3.1-4, respectively.

Table A.6.6.3.3.1-1: Supported test configurations in SA inter-RAT E-UTRAN event triggered reporting in DRX with PCell in FR1 for UE configured with highSpeedMeasFlag-r16

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.6.3.3.1-2: General test parameters for SA inter-RAT E-UTRAN event triggered reporting in DRX with PCell in FR1 for UE configured with highSpeedMeasFlag-r16

Parameter	Unit	Value	Comment

NR RF Channel Number		1	1 NR carrier frequency is used in the test
LTE RF Channel Number		2	1 LTE carrier frequency is used in the test
Channel Bandwidth	MHz	As specified in Tables A.6.6.3.3.1-2 and A.6.6.3.3.1-3.	
Active cell		Cell 1	Cell 1 is on RF channel number 1
Neighbour cell		Cell 2	Cell 2 is on RF channel number 2
Gap Pattern Id		0	As specified in Clause Table 9.1.2-1. Per-UE gap pattern.
NR measurement quantity		SS-RSRP	Measurement quantity for Cell 1
Inter-RAT E-UTRAN measurement quantity		RSRP	Measurement quantity for Cell 2
b2-Threshold1	dBm	Note 1	SS-RSRP threshold for SS-RSRP measurement on cell1 for event B2
b2-Threshold2EUTRA	dBm	-97	E-UTRAN RSRP threshold for SS-RSRP measurement on cell1 for event B2
Hysteresis	dB	0	
TimeToTrigger	s	0	
Filter coefficient		0	L3 filtering is not used
DRX		DRX.6	DRX cycle configurations DRX.6 is defined in Table A.3.3.1-6.
T1	s	5	
T2	s	5	
Note 1: Values are defined in Table A.6.6.3.3.1-3			

Table A.6.6.3.3.1-3: PCell specific test parameters for SA inter-RAT E-UTRA event triggered reporting in DRX with PCell in FR1 for UE configured with highSpeedMeasFlag-r16

Parameter		Unit	Configuration	Cell 1	
				T1	T2
RF channel number			1, 2, 3, 4, 5, 6	1	
Duplex mode			1, 2, 3	FDD	
			4, 5, 6	TDD	
TDD Configuration	SCS=15 KHz		2, 5	TDDConf.1.1	
	SCS=30 KHz		3, 6	TDDConf.2.1	
$BW_{channel}$		MHz	1, 4	10: $N_{RB,c}$ = 52 (FDD)	
			2, 5	10: $N_{RB,c}$ = 52 (TDD)	
			3, 6	40: $N_{RB,c}$ = 106 (TDD)	
PDSCH reference measurement channel			1, 4	SR.1.1 FDD	
			2, 5	SR.1.1 TDD	
			3, 6	SR.2.1 TDD	
RMSI CORESET reference channel			1, 4	CR.1.1 FDD	
			2, 5	CR.1.1 TDD	
			3, 6	CR.2.1 TDD	
Dedicated CORESET reference channel			1, 4	CCR.1.1 FDD	
			2, 5	CCR.1.1 TDD	
			3, 6	CCR.2.1 TDD	
BWP configurations	Initial DL BWP		1, 2, 3, 4, 5, 6	DLBWP.0.1	
	Dedicated DL BWP		1, 2, 3, 4, 5, 6	DLBWP.1.1	
	Initial UL BWP		1, 2, 3, 4, 5, 6	ULBWP.0.1	
	Dedicated UL BWP		1, 2, 3, 4, 5, 6	ULBWP.1.1	
OCNG pattern[Note1]			1, 2, 3, 4, 5, 6	OP.1	
SMTC configuration			1, 2, 3, 4, 5, 6	SMTC.1	
SSB configuration			1, 2, 4, 5	SSB.1 FR1	

		3, 6	SSB.2 FR1	
CSI-RS for tracking		1, 4	TRS.1.1 FDD	
		2, 5	TRS.1.1 TDD	
		3, 6	TRS.1.2 TDD	
b2-Threshold1	dBm	1, 2, 4, 5	-98	
		3, 6	-95	
EPRE ratio of PSS to SSS	dB	1, 2, 3, 4, 5, 6	0	
EPRE ratio of PBCH_DMRS to SSS				
EPRE ratio of PBCH to PBCH_DMRS				
EPRE ratio of PDCCH_DMRS to SSS				
EPRE ratio of PDCCH to PDCCH_DMRS				
EPRE ratio of PDSCH_DMRS to SSS				
EPRE ratio of PDSCH to PDSCH_DMRS				
EPRE ratio of OCNG DMRS to SSS				
EPRE ratio of OCNG to OCNG DMRS				
N_{oc}[Note2]	dBm/15 KHz	1, 2, 3, 4, 5, 6	-106	
N_{oc}[Note2]	dBm/SCS	1, 2, 4, 5	-106	
		3, 6	-103	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	18	-2
$\hat{E}_s/I_{ot}$[Note3]	dB	1, 2, 3, 4, 5, 6	18	-2
SS-RSRP[Note3]	dBm/SCS	1, 2, 4, 5	-88	-108
		3, 6	-85	-105
SSB_RP[Note3]	dBm/SCS	1, 2, 4, 5	-88	-108
		3, 6	-85	-105
Io[Note3]	dBm/9.36 MHz	1, 2, 4, 5	-59.98	-75.92
	dBm/38.16 MHz	3, 6	-53.88	-69.82
Propagation condition		1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x2 Low	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.6.6.3.3.1-4: E-UTRAN neighbour cell specific test parameters for SA inter-RAT E-UTRAN event triggered reporting in DRX with PCell in FR1 for UE configured with highSpeedMeasFlag-r16

Parameter	Unit	Configuration	Cell 2	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6	2	
Duplex mode		1, 2, 3	FDD	

		4, 5, 6	TDD	
TDD special subframe configuration[Note1]		4, 5, 6	6	
TDD uplink-downlink configuration[Note1]		4, 5, 6	1	
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]		1, 2, 3	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note3]				
OCNG_RB[Note3]				
N_{oc}[Note4]	dBm/15kHz	1, 2, 3, 4, 5, 6	-106	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	-Infinity	19
$\hat{E}_s/I_{ot}$[Note5]	dB	1, 2, 3, 4, 5, 6	-Infinity	19
RSRP[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-87
SCH_RP[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-87

Io[Note5]	dBm/9MHz	1, 2, 3, 4, 5, 6	-78.22+10log ($N_{RB,c}$ /50)	-59.16+10log ($N_{RB,c}$ /50)
Propagation Condition [Note6]		1, 2, 3, 4, 5, 6	AWGN1944	
Antenna Configuration and Correlation Matrix [Note6]		1, 2, 3, 4, 5, 6	1x2 Low	
Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].				
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.				
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].				

A.6.6.3.3.2 Test Requirements

In the test, the UE shall send one Event B2 triggered measurement report for Cell 2 to the PCell, with a measurement reporting delay less than 4.8s from the start of period T2. The measurement reporting delay is defined as the time from the beginning of time period T2 to the moment when the UE sends the measurement report on PUSCH.

The UE shall not send event-triggered measurement reports as long as the reporting criteria is not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.6.4 L1-RSRP measurement for beam reporting

A.6.6.4.1 SSB based L1-RSRP measurement when DRX is not used

A.6.6.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.1, with the testing configurations for NR cells in Table A.6.6.4.1.1-1.

Table A.6.6.4.1.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.6.6.4.1.2 Test parameters

There is one cells in the test, the FR1 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.6.6.4.1.2-1 and Table A.6.6.4.1.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.6.6.4.1.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~3		freq1
Duplex mode	1		FDD
	2		TDD
	3		TDD
TDD Configuration	1		N/A
	2		TDDConf.1.1
	3		TDDConf.2.1
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52
	2		10: $N_{RB,c}$ = 52
	3		40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1		SR.1.1 FDD
	2		SR.1.1 TDD
	3		SR.2.1 TDD
RMSI CORESET Reference Channel	1		CR.1.1 FDD
	2		CR.1.1 TDD
	3		CR.2.1 TDD
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD
	2		CCR.1.1 TDD
	3		CCR.2.1 TDD
SSB configuration	1		SSB.3 FR1
	2		SSB.3 FR1
	3		SSB.4 FR1
OCNG Patterns	1~3		OP.1
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~3		SMTC.1
TRS Configuration	1		TRS.1.1 FDD
	2		TRS.1.1 TDD
	3		TRS.1.2 TDD
DRX configuration	1~3		Off
reportConfigType	1~3		periodic
reportQuantity	1~3		ssb-Index-RSRP
Number of reported RS	1~3		2
L1-RSRP reporting period	1~3	slot	80
T1	1~3	s	5
T2	1~3	s	1
EPRE ratio of PSS to SSS	1~3	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			

Propagation condition	1~3		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.6.6.4.1.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
N_{oc} Note2	1~3	dBm/15kHz	-94.65			
N_{oc} Note2	1,2	dBm/SSB SCS	-94.65			
	3		-91.65			
$\hat{E}_s / I_{ot}$	1~3	dB	0	0	-Infinity	3
SSB RSRP Note3	1,2	dBm/SSB SCS	-94.65	-94.65	-Infinity	-91.65
	3		-91.65	-91.65	-Infinity	-88.65
Io Note3	1,2	dBm/9.36 MHz	-63.69	-63.69	-66.70	-61.93
	3	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.84
$\hat{E}_s / N_{oc}$	1~3	dB	0	0	-Infinity	3
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.6.6.4.1.3 Test Requirements

The UE shall send L1-RSRP report every 80 slots. No later than 640ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute accuracy requirement in clause 10.1.19.1.1 and relative accuracy requirement in clause 10.1.19.1.2. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.4.2 SSB based L1-RSRP measurement when DRX is used

A.6.6.4.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.1, with the testing configurations for NR cells in Table A.6.6.4.2.1-1.

Table A.6.6.4.2.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.6.6.4.2.2 Test parameters

There is one cells in the test, the FR1 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.6.6.4.2.2-1 and Table A.6.6.4.2.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.6.6.4.2.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~3		freq1
Duplex mode	1		FDD
	2		TDD
	3		TDD
TDD Configuration	1		N/A
	2		TDDConf.1.1
	3		TDDConf.2.1
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52
	2		10: $N_{RB,c}$ = 52
	3		40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1		SR.1.1 FDD
	2		SR.1.1 TDD
	3		SR.2.1 TDD
RMSI CORESET Reference Channel	1		CR.1.1 FDD
	2		CR.1.1 TDD
	3		CR.2.1 TDD
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD
	2		CCR.1.1 TDD
	3		CCR.2.1 TDD
SSB configuration	1		SSB.3 FR1
	2		SSB.3 FR1
	3		SSB.4 FR1
OCNG Patterns	1~3		OP.1
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~3		SMTC.1
TRS Configuration	1		TRS.1.1 FDD
	2		TRS.1.1 TDD
	3		TRS.1.2 TDD
DRX configuration	1~3		DRX.3
reportConfigType	1~3		periodic
reportQuantity	1~3		ssb-Index-RSRP
Number of reported RS	1~3		2
L1-RSRP reporting period	1~3	slot	80
T1	1~3	s	5
T2	1~3	s	1
EPRE ratio of PSS to SSS	1~3	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			

EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~3		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.6.6.4.2.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
N_{oc} Note2	1~3	dBm/15kHz	-94.65			
N_{oc} Note2	1,2	dBm/SSB SCS	-94.65			
	3		-91.65			
$\hat{E}_s / I_{ot}$	1~3	dB	0	0	-Infinity	3
SSB RSRP Note3	1,2	dBm/SSB SCS	-94.65	-94.65	-Infinity	-91.65
	3		-91.65	-91.65	-Infinity	-88.65
Io Note3	1,2	dBm/9.36 MHz	-63.69	-63.69	-66.70	-61.93
	3	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.84
$\hat{E}_s / N_{oc}$	1~3	dB	0	0	-Infinity	3

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.6.4.2.3 Test Requirements

The UE shall send L1-RSRP report every 80 slots. No later than 640ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute accuracy requirement in clause 10.1.19.1.1 and relative accuracy requirement in clause 10.1.19.1.2. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.4.3 CSI-RS based L1-RSRP measurement when DRX is not used

A.6.6.4.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.2, with the testing configurations for NR cells in Table A.6.6.4.3.1-1.

Table A.6.6.4.3.1-1: Applicable NR configurations for FR1 CSI-RS based L1-RSRP test

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.6.6.4.3.2 Test parameters

There is one cells in the test, the FR1 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.6.6.4.3.2-1 and Table A.6.6.4.3.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the CSI-RS and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-RSRP on aperiodic CSI-RS resources. UE is also configured to measure L1-RSRP based on SSB. After 80ms from the beginning of the test, the DCI trigger comes in slot n (0 for Config 1,2 and 8 for Config 3) of a frame and UE provides the report back based on the reporting configuration as defined in Table A.6.6.4.3.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs.

Table A.6.6.4.3.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~3		freq1
Duplex mode	1		FDD
	2		TDD
	3		TDD
TDD Configuration	1		N/A
	2		TDDConf.1.1
	3		TDDConf.2.1
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52
	2		10: $N_{RB,c}$ = 52
	3		40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1		SR.1.1 FDD
	2		SR.1.1 TDD
	3		SR.2.1 TDD
RMSI CORESET Reference Channel	1		CR.1.1 FDD
	2		CR.1.1 TDD
	3		CR.2.1 TDD
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD
	2		CCR.1.1 TDD
	3		CCR.2.1 TDD
SSB configuration	1		SSB.3 FR1
	2		SSB.3 FR1
	3		SSB.4 FR1
CSI-RS configuration	1		CSI-RS 1.3 FDD
	2		CSI-RS 1.3 TDD
	3		CSI-RS 2.3 TDD
OCNG Patterns	1~3		OP.1
TRS Configuration	1		TRS.1.1 FDD
	2		TRS.1.1 TDD
	3		TRS.1.2 TDD

Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~3		SMTC.1
DRX configuration	1~3		Off
reportConfigType	1~3		aperiodic
reportQuantity	1~3		cri-RSRP
Number of reported RS	1~3		2
qcl-Info	1~3		SSB#0 for resource#0
			SSB#1 for resource#1
reportSlotOffsetList	1~3	slots	8
T1	1~3	s	5
EPRE ratio of PSS to SSS	1~3	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~3		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.6.6.4.3.2-2: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
N_{oc} Note1	1~3	dBm/15kHz	-94.65	
N_{oc} Note1	1,2	dBm/SSB SCS	-94.65	
	3		-91.65	
$\hat{E}_s / I_{ot}$	1~3	dB	0	3
CSI-RS RSRP Note2	1,2	dBm/SSB SCS	-94.65	-91.65
	3		-91.65	-88.65
Io Note2	1,2	dBm/9.36 MHz	-63.69	-61.93
	3	dBm/38.16 MHz	-57.59	-55.84
$\hat{E}_s / N_{oc}$	1~3	dB	0	3
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

A.6.6.4.3.3 Test Requirements

After 80ms from the beginning of the test, the UE shall send L1-RSRP report at slot 8 from the reception of DCI triggering the L1-RSRP measurement. The L1-RSRP report shall include the results for both CSI-RS#0 and CSI-

RS#1 while meeting the absolute accuracy requirement in clause 10.1.20.1.1 and relative accuracy requirement in clause 10.1.20.1.2.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.4.4 CSI-RS based L1-RSRP measurement when DRX is used

A.6.6.4.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.2, with the testing configurations for NR cells in Table A.6.6.4.4.1-1.

Table A.6.6.4.4.1-1: Applicable NR configurations for FR1 CSI-RS based L1-RSRP test

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.6.6.4.4.2 Test parameters

There is one cells in the test, the FR1 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.6.6.4.4.2-1 and Table A.6.6.4.4.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the CSI-RS and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-RSRP on aperiodic CSI-RS resources. UE is also configured to measure L1-RSRP based on SSB. After 80ms from the beginning of the test, the DCI trigger comes in slot n (0 for Config 1,2 and 8 for Config 3) of a frame and UE provides the report back based on the reporting configuration as defined in Table A.6.6.4.4.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs.

Table A.6.6.4.4.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~3		freq1
Duplex mode	1		FDD
	2		TDD
	3		TDD
TDD Configuration	1		N/A
	2		TDDConf.1.1
	3		TDDConf.2.1
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52
	2		10: $N_{RB,c}$ = 52
	3		40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1		SR.1.1 FDD
	2		SR.1.1 TDD
	3		SR.2.1 TDD
RMSI CORESET Reference Channel	1		CR.1.1 FDD
	2		CR.1.1 TDD
	3		CR.2.1 TDD

Dedicated CORESET Reference Channel	1		CCR.1.1 FDD
	2		CCR.1.1 TDD
	3		CCR.2.1 TDD
SSB configuration	1		SSB.3 FR1
	2		SSB.3 FR1
	3		SSB.4 FR1
CSI-RS configuration	1		CSI-RS 1.3 FDD
	2		CSI-RS 1.3 TDD
	3		CSI-RS 2.3 TDD
OCNG Patterns	1~3		OP.1
TRS Configuration	1		TRS.1.1 FDD
	2		TRS.1.1 TDD
	3		TRS.1.2 TDD
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~3		SMTC.1
DRX configuration	1~3		DRX.3
reportConfigType	1~3		aperiodic
reportQuantity	1~3		cri-RSRP
Number of reported RS	1~3		2
qcl-Info	1~3		SSB#0 for resource#0
			SSB#1 for resource#1
reportSlotOffsetList	1~3	slots	8
T1	1~3	s	5
EPRE ratio of PSS to SSS	1~3	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~3		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.6.6.4.4.2-2: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
N_{oc} Note1	1~3	dBm/15kHz	-94.65	
N_{oc} Note1	1,2	dBm/SSB SCS	-94.65	
	3		-91.65	
$\hat{E}_s / I_{ot}$	1~3	dB	0	3
CSI-RS RSRP Note2	1,2	dBm/SSB SCS	-94.65	-91.65
	3		-91.65	-88.65
Io Note2	1,2	dBm/9.36 MHz	-63.69	-61.93
	3	dBm/38.16 MHz	-57.59	-55.84

$\hat{E}_s / N_{oc}$	1~3	dB	0	3
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

A.6.6.4.4.3 Test Requirements

After 80ms from the beginning of the test, the UE shall send L1-RSRP report at slot 8 from the reception of DCI triggering the L1-RSRP measurement. The L1-RSRP report shall include the results for both CSI-RS#0 and CSI-RS#1 while meeting the absolute accuracy requirement in clause 10.1.20.1.1 and relative accuracy requirement in clause 10.1.20.1.2.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.4.5 SSB based L1-RSRP measurement when DRX is used for UE configured with *highSpeedMeasFlag-r16*

A.6.6.4.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement when UE is configured with *highSpeedMeasFlag-r16*. This test will partly verify the L1-RSRP measurement requirements for UE configured with *highSpeedMeasFlag-r16* in clause 9.5.4.1, with the testing configurations for NR cells in Table A.6.6.4.5.1-1.

Table A.6.6.4.5.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.6.6.4.5.2 Test parameters

There is one cells in the test, the FR1 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.6.6.4.5.2-1 and Table A.6.6.4.5.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.6.6.4.5.2-1: General test parameters for UE configured with *highSpeedMeasFlag-r16*

Parameter	Config	Unit	Value
SSB GSCN	1~3		freq1
Duplex mode	1		FDD
	2		TDD

	3		TDD
TDD Configuration	1		N/A
	2		TDDConf.1.1
	3		TDDConf.2.1
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52
	2		10: $N_{RB,c}$ = 52
	3		40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1		SR.1.1 FDD
	2		SR.1.1 TDD
	3		SR.2.1 TDD
RMSI CORESET Reference Channel	1		CR.1.1 FDD
	2		CR.1.1 TDD
	3		CR.2.1 TDD
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD
	2		CCR.1.1 TDD
	3		CCR.2.1 TDD
SSB configuration	1		SSB.3 FR1
	2		SSB.3 FR1
	3		SSB.4 FR1
OCNG Patterns	1~3		OP.1
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~3		SMTC.1
TRS Configuration	1		TRS.1.1 FDD
	2		TRS.1.1 TDD
	3		TRS.1.2 TDD
DRX configuration	1~3		DRX.3
reportConfigType	1~3		periodic
reportQuantity	1~3		ssb-Index-RSRP
Number of reported RS	1~3		2
L1-RSRP reporting period	1~3	slot	80
T1	1~3	s	5
T2	1~3	s	2
EPRE ratio of PSS to SSS	1~3	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.6.6.4.5.2-2: SSB specific test parameters for UE configured with *highSpeedMeasFlag-r16*

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
N_{oc} Note2	1~3	dBm/15kHz	-94.65			
N_{oc} Note2	1,2	dBm/SSB SCS	-94.65			
	3		-91.65			
$\hat{E}_s/I_{ot}$	1~3	dB	0	0	-Infinity	3
SSB RSRP Note3	1,2	dBm/SSB SCS	-94.65	-94.65	-Infinity	-91.65
	3		-91.65	-91.65	-Infinity	-88.65
Io Note3	1,2	dBm/9.36 MHz	-63.69	-63.69	-66.70	-61.93
	3	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.84
$\hat{E}_s/N_{oc}$	1~3	dB	0	0	-Infinity	3
Propagation conditions	1,2		AWGN		AWGN 1944 Hz	
	3		AWGN		AWGN 3334 Hz	

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.6.4.5.3 Test Requirements

The UE shall send L1-RSRP report every 80 slots. No later than 640ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute accuracy requirement in clause 10.1.19.1.1 and relative accuracy requirement in clause 10.1.19.1.2. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.4.6 Inter-cell SSB based L1-RSRP measurements on FR1 PCell when DRX is used

A.6.6.4.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement for SSB of a cell with additional PCI. This test will partly verify the L1-RSRP measurement requirements in clause 9.13.4.1, with the testing configurations for NR serving cells in Table A.6.6.4.6.1-1.

Table A.6.6.4.6.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode

2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.6.6.4.6.2 Test parameters

There are two cells in the test, the FR1 PCell (Cell 1) and a cell with additional PCI (Cell 2). The test parameters for the Cell 1 are given in Table A.6.6.4.6.2-1. The test parameters for Cell 2 are given in Table A.6.6.4.6.2-2 below.

SSB#0 and SSB#1 are transmitted on Cell 1 and Cell 2. In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSB#0 and report measurement results periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. At the beginning of T2, SSB#1 starts transmission and the UE is configured for L1-RSRP measurement on SSB#1. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured in CSI-ReportConfig and *additionalPCIList* configured in *CSI-SSB-ResourceSet.*

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the the SSB#0 for Cell 1.

Table A.6.6.4.6.2-1: General test parameters

Parameter	Config	Unit	Value
Active cell	1~3		Cell 1
A cell with additional PCI	1~3		Cell 2
RF Channel Number	1~3		1: Cell 1 and Cell 2
SSB GSCN	1~3		freq1
Duplex mode	1		FDD
	2		TDD
	3		TDD
TDD Configuration	1		N/A
	2		TDDConf.1.1
	3		TDDConf.2.1
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52
	2		10: $N_{RB,c}$ = 52
	3		40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1		SR.1.1 FDD
	2		SR.1.1 TDD
	3		SR.2.1 TDD
RMSI CORESET Reference Channel	1		CR.1.1 FDD
	2		CR.1.1 TDD
	3		CR.2.1 TDD
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD
	2		CCR.1.1 TDD
	3		CCR.2.1 TDD
SSB configuration	1		SSB.3 FR1 for Cell1 and Cell2
	2		SSB.3 FR1 for Cell1 and Cell2
	3		SSB.4 FR1 for Cell1 and Cell2
OCNG Patterns	1~3		OP.1
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1

SMTC configuration	1~3		SMTC.1
TRS Configuration	1		TRS.1.1 FDD
	2		TRS.1.1 TDD
	3		TRS.1.2 TDD
DRX configuration	1~3		DRX.3
reportConfigType	1~3		periodic
reportQuantity	1~3		ssb-Index-RSRP
Number of reported RS	1~3		2
L1-RSRP reporting period	1~3	slot	80
T1	1~3	s	5
T2	1~3	s	1
CP length	1~3		Normal
EPRE ratio of PSS to SSS	1~3	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~3		AWGN
Time offset between serving and a cell with additional PCI	1		< CP
	2		< CP
	3		< CP
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.6.6.4.6.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0 of Cell 1		SSB#1 of Cell 2	
			T1	T2	T1	T2
N_{oc} Note2	1~3	dBm/15kHz	-94.65			
N_{oc} Note2	1,2	dBm/SSB SCS	-94.65			
	3		-91.65			
$\hat{E}_s / I_{ot}$	1~3	dB	0	0	-Infinity	3
SSB RSRP Note3	1,2	dBm/SSB SCS	-94.65	-94.65	-Infinity	-91.65
	3		-91.65	-91.65	-Infinity	-88.65
Io Note3	1,2	dBm/9.36 MHz	-63.69	-63.69	-66.70	-61.93
	3	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.84
$\hat{E}_s / N_{oc}$	1~3	dB	0	0	-Infinity	3

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.6.4.6.3 Test Requirements

The UE shall send L1-RSRP report every 80 slots. No later than X ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of SSB#1 while meeting the absolute accuracy requirement in clause 10.1.19.1.1 and relative accuracy requirement in clause 10.1.19.1.2, where X is

- 680 for Config 1&2
- 660 for Config 3

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.5 Inter-RAT UTRAN FDD measurements

A.6.6.5.1 SA NR - UTRAN FDD event-triggered reporting in non-DRX in FR1

A.6.6.5.1.1 Test Purpose and Environment

The purpose of this set of tests is to verify that the UE makes correct event-triggered reporting of inter-RAT UTRAN FDD measurements when operating in standalone (SA) operation with PCell in FR1. This test shall partly verify the cell search and measurement requirements in Clause 9.4.6.

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the NR PCell and Cell 2 is an inter-RAT UTRAN FDD neighbour cell. In the measurement control information from the PCell it is indictated to the UE that event-triggered reporting with Event B1 (Inter RAT neighbour becomes better than threshold) is to be used. Each test consists of two consecutive time periods, with durations T1 and T2, respectively. Prior to the start of time duration T1, the UE shall be fully synchronized to Cell 1. During T1, the UE shall not have any information on Cell 2.

Supported test configurations are shown in table A.6.6.5.1.1-1. General test parameters are provided in Table A.6.6.5.1.1-2 below. Test parameters for Cell 1 and Cell 2, valid for both time duration T1 and T2, are provided in Tables A.6.6.5.1.1-3 and A.6.6.5.1.1-4, respectively.

Table A.6.6.5.1.1-1: Supported test configurations in SA inter-RAT UTRAN FDD event triggered reporting in non-DRX with PCell in FR1

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, UTRA FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, UTRA FDD
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, UTRA FDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.6.5.1.1-2: General test parameters for SA inter-RAT UTRAN FDD event triggered reporting in non-DRX with PCell in FR1

Parameter	Unit	Value	Comment
NR RF Channel Number		1	1 NR carrier frequency is used in the test
UTRA RF Channel Number		2	1 UTRA carrier frequency is used in the test
Channel Bandwidth	MHz	As specified in Tables A.6.6.5.1.1-3 and A.6.6.5.1.1-4.	
Active cell		Cell 1	Cell 1 is on RF channel number 1

Neighbour cell		Cell 2	Cell 2 is on RF channel number 2
Gap Pattern Id		0	As specified in Clause Table 9.1.2-1. Per-UE gap pattern.
Inter-RAT UTRA measurement quantity		CPICH Ec/Io	Measurement quantity for Cell 2
b1-ThresholdUTRA-FDD	dB	-16.5	CPICH Ec/Io threshold for SS-RSRP measurement on cell1 for event B1
Hysteresis	dB	0	
TimeToTrigger	s	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	OFF
T1	s	5	
T2	s	5	
Note 1: Values are defined in Table A.6.6.5.1.1-3			

Table A.6.6.5.1.1-3: PCell specific test parameters for SA inter-RAT UTRAN FDD event triggered reporting in non-DRX with PCell in FR1

Parameter		Unit	Configuration	Cell 1	
				T1	T2
RF channel number			1, 2, 3	1	
Duplex mode			1, 2, 3	FDD	
TDD Configuration	SCS=15 KHz		2	TDDConf.1.1	
	SCS=30 KHz		3	TDDConf.2.1	
$BW_{channel}$		MHz	1	10: $N_{RB,c}$ = 52 (FDD)	
			2	10: $N_{RB,c}$ = 52 (TDD)	
			3	40: $N_{RB,c}$ = 106 (TDD)	
PDSCH reference measurement channel			1	SR.1.1 FDD	
			2	SR.1.1 TDD	
			3	SR.2.1 TDD	
CORESET reference channel			1	CR.1.1 FDD	
			2	CR.1.1 TDD	
			3	CR.2.1 TDD	
BWP configurations	Initial DL BWP		1, 2, 3	DLBWP.0.1	
	Dedicated DL BWP		1, 2, 3	DLBWP.1.1	
	Initial UL BWP		1, 2, 3	ULBWP.0.1	
	Dedicated UL BWP		1, 2, 3	ULBWP.1.1	
OCNG pattern[Note1]			1, 2, 3	OP.1	
SMTC configuration			1, 2, 3	SMTC.1	
SSB configuration			1, 2	SSB.1 FR1	
			3	SSB.2 FR1	
CSI-RS for tracking			1	TRS.1.1 FDD	
			2	TRS.1.1 TDD	
			3	TRS.1.2 TDD	
EPRE ratio of PSS to SSS		dB	1, 2, 3	0	
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS					

EPRE ratio of OCNG to OCNG DMRS				
N_{oc}[Note2]	dBm/15 KHz	1, 2, 3	-106	
N_{oc}[Note2]	dBm/SCS	1, 2	-106	
		3	-103	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3	18	-2
$\hat{E}_s/I_{ot}$[Note3]	dB	1, 2, 3	18	-2
SS-RSRP[Note3]	dBm/SCS	1, 2	-88	-108
		3	-85	-105
SSB_RP[Note3]	dBm/SCS	1, 2	-88	-108
		3	-85	-105
Io[Note3]	dBm/9.36 MHz	1, 2	-59.98	-75.92
	dBm/38.16 MHz	3	-53.88	-69.82
Propagation condition		1, 2, 3	ETDLA30	
Antenna Configuration and Correlation Matrix		1, 2, 3	1x2 Low	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.6.6.5.1.1-4: UTRAN neighbour cell specific test parameters for SA inter-RAT UTRAN FDD event triggered reporting in non-DRX with PCell in FR1

Parameter	Unit	Cell 2	
		T1	T2
UTRA RF Channel Number		2	
CPICH_Ec/Ior	dB	-10	
PCCPCH_Ec/Ior	dB	-12	
SCH_Ec/Ior	dB	-12	
PICH_Ec/Ior	dB	-15	
DPCH_Ec/Ior	dB	N/A	
OCNS		-0.941	
$\hat{I}_{or}/I_{oc}$	dB	-Infinity	-1.8
I_{oc}	dBm/3.84 MHz	-70	
CPICH_Ec/Io	dB	-Infinity	-14
Propagation Condition		AWGN	

Note 1: The DPCH level is controlled by the power control loop.
Note 2: The power of the OCNS channel that is added shall make the total power from the cell to be equal to I_{or}.

A.6.6.5.1.2 Test Requirements

The UE shall send one Event B1 triggered measurement report for Cell 2 to the PCell, with a measurement reporting delay less than 2.4s from the start of period T2, i.e. when Cell 2 becomes detectable. The measurement reporting delay is defined as the time from the beginning of time period T2 to the moment when the UE sends the measurement report on PUSCH.

The UE shall not send event-triggered measurement reports as long as the reporting criteria is not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.6.6 CLI measurements

A.6.6.6.1 SRS-RSRP measurement with DRX

A.6.6.6.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of SRS-RSRP measurement. This test will verify the SRS-RSRP measurement requirements in clause 9.7.2.5 with the testing configurations for NR cells in Table A.6.6.6.1.1-1.

Table A.6.6.6.1.1-1: Applicable NR configurations for FR1 SRS-RSRP test

Configuration	Description
1	NR 15 kHz SRS SCS, 10 MHz bandwidth, TDD duplex mode
2	NR 30 kHz SRS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.6.6.6.1.2 Test Parameters

One cell is deployed in the test, which is FR1 PCell (Cell 1). The test parameters for PCell is given in Table A.6.6.6.1.2-1 and A.6.6.6.1.2-2 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event I1 is used. The test consists of two successive time periods, with time duration of T1 and T2, respectively.

During the test, the test system transmits SRS resource for measurement in the DL slot according to the SRS configuration in Table A.6.6.6.1.2-4 and the test parameters for the (virtual) neighbour cell UE in Table A. 6.6.6.1.2-3. During the test, the test system does not transmit PDCCH/PDSCH/OCNG on SRS symbol to be transmitted and on 1 data symbol before SRS to be transmitted.

Table A.6.6.6.1.2-1: General test parameters for SRS-RSRP event triggered reporting for PCell in FR1

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2	Cell 1	
RF Channel Number		1, 2	1: Cell 1	
SSB configuration		1	SSB.1 FR1	
		2	SSB.2 FR1	
SMTC configuration		1	SMTC.1	
		2	SMTC.1	
SRS configuration		1	SRSConf.1	Table A.6.6.6.1.2-3
		2	SRSConf.2	
CP length		1, 2	Normal	
i1-Threshold	dBm	1	-97	
		2	-95	
Hysteresis	dB	1, 2	0	
Time To Trigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX		1, 2	DRX.7	
Time offset between DL from serving cell and SRS from test system	μs	1,2	17.67	
T1	s	1, 2	5	
T2	s	1, 2	5	

Table A.6.6.6.1.2-2: NR Cell specific test parameters for SRS-RSRP event triggered reporting for PCell in FR1

Parameter	Unit	Test configuration	Cell 1	
			T1	T2
TDD configuration		1	TDDConf.1.1	
		2	TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 TDD	
		2	SR.2.1 TDD	
RMSI CORESET RMC configuration		1	CR.1.1 TDD	
		2	CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 TDD	
		2	CCR.2.1 TDD	
OCNG Patterns		1, 2	OP.1	
TRS Configuration		1	TRS.1.1 TDD	
		2	TRS.1.2 TDD	
Initial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2	DLBWP.1.1	
Active UL BWP configuration		1, 2	ULBWP.1.1	
N_{oc} Note 2	dBm/15 kHz	1	-98	
		2		
N_{oc} Note 2	dBm/SCS	1	-98	
		2	-95	
Propagation Condition		1, 2	AWGN	

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Table A.6.6.6.1.2-3: NR Cell specific test parameters for SRS-RSRP event triggered reporting for neighbour cell UE

Parameter	Unit	Test configuration	Neighbour cell UE	
			T1	T2
N_{oc} Note 2	dBm/15 kHz	1	-98	
		2		
N_{oc} Note 2	dBm/SCS	1	-98	
		2	-95	
$\hat{E}_s / I_{ot}$	dB	1	-infinity	4
		2		
$\hat{E}_s / N_{oc}$	dB	1	-infinity	4
		2		
SRS-RSRP Note 3	dBm/SCS kHz	1	-infinity	-94
		2	-infinity	-91
Io	dBm/9.36 MHz	1	-70.05	-64.59

	dBm/38.16 MHz	2	-63.96	-58.50
Propagation Condition		1, 2	AWGN	

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SRS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.6.6.6.1.2-4: SRS configuration for measurement reporting

	Field	SRSConf.1	SRSConf.2	Comments
SRS-ResourceSet	srs-ResourceSetId	0	0	
	srs-ResourceIdList	0	0	
	resourceType	Periodic	Periodic	
	Usage	Codebook	Codebook	
SRS-Resource	SRS-ResourceId	0	0	
	nrofSRS-Ports	Port1	Port1	
	transmissionComb	n2	n2	
	combOffset-n2	0	0	
	cyclicShift-n2	0	0	
	resourceMapping startPosition	0	0	
	resourceMapping nrofSymbols	n1	n1	
	resourceMapping repetitionFactor	n1	n1	
	freqDomainPosition	0	0	
	freqDomainShift	0	0	
	freqHopping c-SRS	12	12	
	freqHopping b-SRS	0	0	
	freqHopping b-hop	0	0	
	groupOrSequenceHopping	Neither	Neither	
	resourceType	Periodic	Periodic	
	periodicityAndOffset	sl640, 4	sl640, 9	
	sequenceId	0	0	Any 10 bit number

A.6.6.6.1.3 Test Requirements

The UE shall send one Event I1 triggered measurement report, with a measurement reporting delay less than 1920 ms from the beginning of time period T2.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.6.2 CLI-RSSI measurement with DRX

A.6.6.6.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of CLI-RSSI measurement. This test will verify the CLI-RSSI measurement requirements in clause 9.7.3.5 with the testing configurations for NR cells in Table A.6.6.6.2.1-1.

Table A.6.6.6.2.1-1: Applicable NR configurations for FR1 CLI-RSSI test

Configuration	Description
1	NR 15 kHz SCS, 10 MHz bandwidth, TDD duplex mode
2	NR 30 kHz SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.6.6.6.2.2 Test Parameters

One cell is deployed in the test, which are FR1 PCell (Cell 1). The test parameters for PCell is given in Table A.6.6.6.2.2-1 and A.6.6.6.2.2-2 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event I1 is used. The test consists of two successive time periods, with time duration of T1 and T2, respectively.

During the test, the test system does not transmit PDCCH/PDSCH/OCNG on symbols for CLI-RSSI measurement resource and on 1 data symbol before. The CLI-RSSI measurement resource configuration is in Table A.6.6.6.2.2-3.

Table A.6.6.6.2.2-1: General test parameters for CLI-RSSI event triggered reporting for PCell in FR1

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2	NR Cell 1	
RF Channel Number		1, 2	1: Cell 1	
SSB configuration		1	SSB.1 FR1	
		2	SSB.2 FR1	
SMTC configuration		1	SMTC.1	
		2	SMTC.1	
CLI-RSSI configuration		1	CLI-RSSIConf.1	Table A.6.6.6.2.2-3
		2	CLI-RSSIConf.2	
CP length		1, 2	Normal	
i1-Threshold	dBm	1	-93	
		2	-93	
Hysteresis	dB	1, 2	0	
Time To Trigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX		1, 2	DRX.7	
Time offset between DL from serving cell and OCNG from test system	µs	1,2	17.67	
T1	s	1, 2	5	
T2	s	1, 2	2	

Table A.6.6.6.2.2-2: NR Cell specific test parameters for CLI-RSSI event triggered reporting for PCell in FR1

Parameter	Unit	Test configuration	Cell 1	
			T1	T2
TDD configuration		1	TDDConf.1.1	
		2	TDDConf.2.1	

PDSCH RMC configuration		1	SR.1.1 TDD	
		2	SR.2.1 TDD	
PUSCH parameters		1	N/A	
		2		
RMSI CORESET RMC configuration		1	CR.1.1 TDD	
		2	CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 TDD	
		2	CCR.2.1 TDD	
OCNG Patterns Note 3		1, 2	OP.1	
TRS Configuration		1	TRS.1.1 TDD	
		2	TRS.1.2 TDD	
Initial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2	DLBWP.1.1	
Active UL BWP configuration		1, 2	ULBWP.1.1	
N_{oc} on CLI-RSSI measurement resource Note 2	dBm/15 kHz	1	-116	-108
		2		
N_{oc} on CLI-RSSI measurement resource Note 2	dBm/SCS	1	-116	-108
		2	-113	-105
Io on CLI-RSSI measurement resource	dBm/9.36 MHz	1	-88.05	-80.05
	dBm/38.16 MHz	2	-81.96	-74.00
Io on CLI-RSSI measurement resource	dBm/1.08 MHz	1	-97.43	-89.43
	dBm/1.08 MHz	2	-97.44	-89.44
Propagation Condition		1, 2	AWGN	

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: OCNG is not transmitted in the CLI-RSSI measurement resources.

Table A.6.6.6.2.2-3: CLI-RSSI measurement resource configuration for measurement reporting

	Field	CLI-RSSIConf.1	CLI-RSSIConf.2
RSSI-Resource	rssi-ResourceId	0	0
	rssi-SCS	15	30
	startPRB	0	0
	nrofPRBs	52	106
	startPosition	3	3
	nrofSymbols	11	11
	rssi-PeriodicityAndOffset	sl640, 4	sl640, 9

A.6.6.6.2.3 Test Requirements

The UE shall send one Event I1 triggered measurement report, with a measurement reporting delay less than 640 ms from the beginning of time period T2. The nominal RSSI used to evaluate the requirement shall be based on Io.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.7 NR measurements with autonomous gaps

A.6.6.7.1 SA intra-frequency CGI identification of NR neighbor cell in FR1

A.6.6.7.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of intra-frequency CGI identification of an NR neighbour cell in FR1 with autonomous gaps. This test shall partly verify the measurement requirements in Clause 9.11.

A.6.6.7.1.2 Test Parameters

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the FR1 PCell and Cell 2 is an FR1 neighbour cell on the same frequency as the PCell. The test parameters for PCell and neighbour cell are given in Table A.6.6.7.1.1-2 and A.6.6.7.1.3-2 below. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable. A measurement object is configured for the frequency of the PCell and it is indicated to the UE that event-triggered reporting with Event A3 is used. The UE is expected to detect and send a measurement report with Event A3.

A new RRC message triggering CGI identification shall be sent to the UE during period T2, after the UE has reported Event A3. The RRC message shall create a measurement report configuration with purpose *reportCGI* and *useAutonomousGaps* set to TRUE. The start of T3 is the instant when the last TTI containing the RRC message implying CGI identification is sent to the UE.

The test equipment verifies that potential interruption is carried out correctly by monitoring ACK/NACK sent in PCell during T3 untill a measurement report with CGI is sent.

Table A.6.6.71.1.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.6.6.7.1.2-2: General test parameters for SA intra-frequency CGI identification of NR neighbor cell in FR1

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3	Cell 1	
Neighbour cell		1, 2, 3	Cell 2	Cell to be identified.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	

A3-Offset	dB	1, 2, 3	-4.5	
CP length		1, 2, 3	Normal	
Hysteresis	dB	1, 2, 3	0	
Time To Trigger	s	1, 2, 3	0	
Filter coefficient		1, 2, 3	0	L3 filtering is not used
DRX		1, 2, 3		OFF
Time offset between serving and neighbour cells		1	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 µs	Synchronous cells
		3	3 µs	Synchronous cells
T1	s	1, 2, 3	5	
T2	s	1, 2, 3	5	
T2	s	1, 2, 3	5	

Table A.6.6.7.1.2-3: NR Cell specific test parameters for SA intra-frequency CGI identification of NR neighbor cell in FR1

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	TN/A		TN/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		CR.1.1 FDD	
		2	CR.1.1 TDD		CR.1.1 TDD	
		3	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		CCR.1.1 FDD	
		2	CCR.1.1 TDD		CCR.1.1 TDD	
		3	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns		1, 2, 3	OP.1		OP.1	
TRS Configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD		N/A	
		3	TRS.1.2 TDD		N/A	
IInitial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2, 3	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1	-98			
		2				
		3				
$\hat{E}_s/I_{ot}$	dB	1	4	-1.46	-Infinity	-1.46
		2				
		3				
$\hat{E}_s/N_{oc}$	dB	1	4	4	-Infinity	4
		2				
		3				
SS-RSRP Note 3	dBm/SCS kHz	1	-94	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94

		3	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1	-64.60	-62.25	--64.60	-62.25
	dBm/9.36 MHz	2	-64.60	-62.25	--64.60	-62.25
	dBm/38.16 MHz	3	-58.50	-56.16	--58.50	-56.16
Propagation Condition		1, 2, 3	AWGN			
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.6.6.7.1.3 Test Requirements

The UE shall send a measurement report containing the CGI of cell 2 within 252 ms from the start of time period T3.

Test requirement = RRC Procedure delay + $T_{identify_CGI}$ + reporting delay

= 10 + 240 + 2ms from the start of T3

= 252 ms

The UE shall be scheduled continuously throughout the test. From the start of T3 until 252 ms, the interruption on PCell shall not be more than the values specified for SA in clause 8.2.2.2.14.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.6.7.2 Identification of a new CGI of inter-RAT E-UTRA cell using autonomous gaps in NR SA

A.6.6.7.2.1 Test Purpose and Environment

This test is to verify the requirement for identification of a new CGI of E-UTRA cell with autonomous gaps in NR SA in clause 9.4.7.

The test scenario comprises of one NR carrier and an E-UTRA carrier and two cells as given in tables A.6.6.7.2.1-1, A.6.6.7.2.1-2, A.6.6.7.2.1-3 and A.6.6.7.2.1-4. PDCCHs indicating new transmissions shall be sent continuously to ensure that the UE would have ACK/NACK sending during identifying a new CGI of E-UTRAN cell. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE is expected to detect and send a measurement report.

A RRC message implying SI reading shall be sent to the UE during period T2, after the UE has reported Event B2. The RRC message shall create a measurement report configuration with purpose *reportCGI* and *useAutonomousGaps* set to TRUE. The start of T3 is the instant when the last TTI containing the RRC message implying SI reading is sent to the UE.

Table A.6.6.7.2.1-1: Supported test configurations of inter-RAT E-UTRAN cell using autonomous gap in SA

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD

5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.6.7.2.1-2: General test parameters for identification of a new CGI of inter-RAT E-UTRA cell using autonomous gaps in NR SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1	1 NR carrier frequency is used in the test
LTE RF Channel Number		2	1 LTE carrier frequency is used in the test
Active cell		Cell 1	
Neighbour cell		Cell 2	Cell to be identified.
LTE Channel Bandwidth	MHz	10	
LTE PDSCH/PCFICH/PDCCH/PHICH parameters			As specified in clause A.3.7.2.1
CP length		Normal	
Hysteresis	dB	0	
Time To Trigger	s	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	
useAutonomousGaps		TRUE	As specified in clause 5.5.3.1 in TS 38.331.
Time offset between cells	ms	3	Asynchronous cells
T1	s	5	
T2	s	≤10	
T3	s	5	

Table A.6.6.7.2.1-3: PCell specific test parameters for identification of a new CGI of inter-RAT E-UTRA cell using autonomous gaps in NR

Parameter		Unit	Configuration	Cell 1		
				T1	T2	T3
RF channel number			1, 2, 3, 4, 5, 6	1		
Duplex mode			1, 2, 3	FDD		
			4, 5, 6	TDD		
TDD Configuration	SCS=15 KHz		2, 5	TDDConf.1.1		
	SCS=30 KHz		3, 6	TDDConf.2.1		
$BW_{channel}$		MHz	1, 4	10: $N_{RB,c}$ = 52 (FDD)		
			2, 5	10: $N_{RB,c}$ = 52 (TDD)		
			3, 6	40: $N_{RB,c}$ = 106 (TDD)		
PDSCH reference measurement channel			1, 4	SR.1.1 FDD		
			2, 5	SR.1.1 TDD		
			3, 6	SR.2.1 TDD		
CORSET reference channel			1, 4	CR.1.1 FDD		
			2, 5	CR.1.1 TDD		
			3, 6	CR.2.1 TDD		
BWP configurations	Initial DL BWP		1, 2, 3, 4, 5, 6	DLBWP.0.1		
	Dedicated DL BWP		1, 2, 3, 4, 5, 6	DLBWP.1.1		
	Initial UL BWP		1, 2, 3, 4, 5, 6	ULBWP.0.1		
	Dedicated UL BWP		1, 2, 3, 4, 5, 6	ULBWP.1.1		
OCNG pattern[Note1]			1, 2, 3, 4, 5, 6	OP.1		
SMTC configuration			1, 2, 3, 4, 5, 6	SMTC.1		
SSB configuration			1, 2, 4, 5	SSB.1 FR1		
			3, 6	SSB.2 FR1		

b2-Threshold1	dBm	1, 2, 4, 5	-98	
		3, 6	-95	
b2-Threshold2EUTRA	dBm/15kHz	1, 2, 3, 4, 5, 6	-109	
EPRE ratio of PSS to SSS	dB	1, 2, 3, 4, 5, 6	0	
EPRE ratio of PBCH_DMRS to SSS				
EPRE ratio of PBCH to PBCH_DMRS				
EPRE ratio of PDCCH_DMRS to SSS				
EPRE ratio of PDCCH to PDCCH_DMRS				
EPRE ratio of PDSCH_DMRS to SSS				
EPRE ratio of PDSCH to PDSCH_DMRS				
EPRE ratio of OCNG DMRS to SSS				
EPRE ratio of OCNG to OCNG DMRS				
N_{oc}[Note2]	dBm/15 KHz	1, 2, 3, 4, 5, 6	-106	
N_{oc}[Note2]	dBm/SCS	1, 2, 4, 5	-106	
		3, 6	-103	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	18	-2
$\hat{E}_s/I_{ot}$[Note3]	dB	1, 2, 3, 4, 5, 6	18	-2
SS-RSRP[Note3]	dBm/SCS	1, 2, 4, 5	-88	-108
		3, 6	-85	-105
SSB_RP[Note3]	dBm/SCS	1, 2, 4, 5	-88	-108
		3, 6	-85	-105
Io[Note3]	dBm/9.36 MHz	1, 2, 4, 5	-59.98	-75.92
	dBm/38.16 MHz	3, 6	-53.88	-69.82
Propagation condition		1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x2 Low	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.6.6.7.2.1-4: Cell specific test parameters for inter-RAT E-UTRAN cell for identification of a new CGI of E-UTRA cell using autonomous gaps

Parameter	Unit	Configuration	Cell 2		
			T1	T2	T3
RF channel number		1, 2, 3, 4, 5, 6	2		
Duplex mode		1, 2, 3	FDD		
		4, 5, 6	TDD		
TDD special subframe configuration[Note1]		4, 5, 6	6		
TDD uplink-downlink configuration[Note1]		4, 5, 6	1		
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6	10 MHz: $N_{RB,c}$ = 50		
PDSCH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3	10 MHz: R.3 FDD		
		4, 5, 6	10 MHz: R.0 TDD		
PCFICH/PDCCH/PHICH parameters:		1, 2, 3	10 MHz: R.6 FDD		
		4, 5, 6	10 MHz: R.6 TDD		

DL Reference Measurement Channel[Note2]					
OCNG Patterns[Note2]		1, 2, 3	10 MHz: OP.10 FDD		
		4, 5, 6	10 MHz: OP.1 TDD		
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0		
PBCH_RB					
PSS_RA					
SSS_RA					
PCFICH_RB					
PHICH_RA					
PHICH_RB					
PDCCH_RA					
PDCCH_RB					
PDSCH_RA					
PDSCH_RB					
OCNG_RA[Note3]					
OCNG_RB[Note3]					
N_{oc}[Note4]	dBm/15kHz	1, 2, 3, 4, 5, 6	-106		
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	-Infinity	7	7
$\hat{E}_s/I_{ot}$[Note5]	dB	1, 2, 3, 4, 5, 6	-Infinity	7	7
RSRP[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-99	-99
SCH_RP[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-99	-99
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN		
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x2 Low		

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.6.7.2.2 Test Requirements

The UE shall transmit a measurement report containing the cell global identifier of cell 2 within 200 milliseconds from the start of T3.

Test requirement = RRC Procedure delay with additional margin + $T_{identify_CGI,E\text{-}UTRAN}$ + reporting delay

= 15 + 30 + 150 + 2ms from the start of T3

= 197 ms, allow 200 ms.

- The UE shall be scheduled continuously throughout the test, and from the start of T3 until 200 ms at least the number of ACK/NACK specified in NOTE 2 shall be detected as being transmitted by the UE.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE 1: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

NOTE 2: The overall ACK/NACK number is caused by two parts. Firstly, at least X ACK/NACK shall be sent during identifying the cell global identifier of cell 2, where X is defined in Table 8.2.2.2.15-1. Secondly, given that continuous DL data allocation, additional 43, 14 and 34 ACK/NACK shall be sent for FDD 15 kHz, TDD 15 kHz and TDD 30 kHz, respectively, from the start of T3 until 200 ms excludes 150 ms for identifying the cell global identifier of cell 2.

A.6.6.8 L1-SINR measurement for beam reporting

A.6.6.8.1 L1-SINR measurement with CSI-RS based CMR and no dedicated IMR configured when DRX is used

A.6.6.8.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-SINR measurement. This test will partly verify the L1-SINR measurement requirements in clause 9.8.4.1, with the testing configurations for NR cells in Table A.6.6.8.1.1-1.

Table A.6.6.8.1.1-1: Applicable NR configurations for FR1 CSI-RS based L1-SINR test

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.6.6.8.2 Test parameters

There is one cells in the test, the FR1 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.6.6.8.2-1 and Table A.6.6.8.2-2 below.

In the CSI-RS measurement configuration, UE is indicated to perform L1-SINR measurement on the CSI-RS and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-SINR on aperiodic CSI-RS resources. After 80ms from the beginning of the test, the DCI trigger comes in slot n (1 Config 1,2 and 8 for Config 3) of a frame and UE provides the report back based on the reporting configuration as defined in Table A.6.6.8.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs.

Table A.6.6.8.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~3		freq1
Duplex mode	1		FDD
	2		TDD
	3		TDD
TDD Configuration	1		N/A
	2		TDDConf.1.1
	3		TDDConf.2.1
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52
	2		10: $N_{RB,c}$ = 52
	3		40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1		SR.1.1 FDD
	2		SR.1.1 TDD
	3		SR.2.1 TDD
RMSI CORESET Reference Channel	1		CR.1.1 FDD
	2		CR.1.1 TDD
	3		CR.2.1 TDD
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD
	2		CCR.1.1 TDD
	3		CCR.2.1 TDD

SSB configuration	1		SSB.3 FR1
	2		SSB.3 FR1
	3		SSB.4 FR1
CSI-RS configuration	1		CSI-RS.1.3 FDD
	2		CSI-RS.1.3TDD
	3		CSI-RS.2.3TDD
OCNG Patterns	1~3		OP.1
TRS Configuration	1		TRS.1.1 FDD
	2		TRS.1.1 TDD
	3		TRS.1.2 TDD
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~3		SMTC.1
DRX configuration	1~3		DRX.3
reportConfigType	1~3		aperiodic
reportQuantity-r16	1~3		cri-SINR-r16
Number of reported RS	1~3		2
qcl-Info	1~3		SSB#0 for resource#0
			SSB#1 for resource#1
reportSlotOffsetList	1~3	slots	26
T1	1~3	s	5
EPRE ratio of PSS to SSS	1~3	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~3		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.6.6.8.2-2: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
N_{oc} Note1	1~3	dBm/15kHz	-94.65	
N_{oc} Note1	1,2	dBm/SSB SCS	-94.65	
	3		-91.65	
$\hat{E}_s / I_{ot}$	1~3	dB	0	3
CSI-RS RSRP Note3	1,2	dBm/SSB SCS	-94.65	-91.65
	3			

			-91.65	-88.65
Io Note2	1,2	dBm/9.36 MHz	-63.69	-61.93
	3	dBm/38.16 MHz	-57.59	-55.84
$\hat{E}_s / N_{oc}$	1~3	dB	0	3
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

A.6.6.8.3 Test Requirements

After 80ms from the beginning of the test, the UE shall send L1-SINR report at slot 26 from the reception of DCI triggering the L1-SINR measurement. The L1-SINR report shall include the results for both CSI-RS#0 and CSI-RS#1 while meeting the absolute accuracy requirement in clause 10.1.27.1.1 and relative accuracy requirement in clause 10.1.27.1.2.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.8.2 L1-SINR measurement with SSB based CMR and dedicated IMR when DRX is not used

A.6.6.8.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-SINR measurement. This test will partly verify the L1-SINR measurement requirements in clause 9.8.4.2, with the testing configurations for NR cells in Table A.6.6.8.2.1-1.

Table A.6.6.8.2.1-1: Applicable NR configurations for FR1 L1-SINR measurement test with SSB based CMR and CSI-RS based IMR

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.6.6.8.2.2 Test parameters

There is one cells in the test, the FR1 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.6.6.8.2.2-1 and Table A.6.6.8.2.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-SINR measurement on the SSBs and the associated CSI-RS resources, and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD measurements based on the SSBs, and UE is configured to perform L1-SINR measurement based on the SSBs as CMR and the CSI-RS resources as IMR.

Table A.6.6.8.2.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~3		freq1
Duplex mode	1		FDD
	2		TDD
	3		TDD
TDD Configuration	1		N/A
	2		TDDConf.1.1
	3		TDDConf.2.1
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52
	2		10: $N_{RB,c}$ = 52
	3		40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1		SR.1.1 FDD
	2		SR.1.1 TDD
	3		SR.2.1 TDD
RMSI CORESET Reference Channel	1		CR.1.1 FDD
	2		CR.1.1 TDD
	3		CR.2.1 TDD
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD
	2		CCR.1.1 TDD
	3		CCR.2.1 TDD
SSB configuration	c		SSB.3 FR1
	2		SSB.3 FR1
	3		SSB.4 FR1
CSI-RS configuration	1		CSI-RS 1.1A FDD
	2		CSI-RS 1.1A TDD
	3		CSI-RS 2.1A TDD
OCNG Patterns	1~3		OP.1
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~3		SMTC.1
TRS Configuration	1		TRS.1.1 FDD
	2		TRS.1.1 TDD
	3		TRS.1.2 TDD
DRX configuration	1~3		off
reportConfigType	1~3		periodic
reportQuantity-r16	1~3		ssb-Index-SINR-r16
Number of reported RS	1~3		2
L1-SINR reporting period	1~3	slot	80
T1	1~3	s	5
T2	1~3	s	1
EPRE ratio of PSS to SSS	1~3	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			

EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~3		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.6.6.8.2.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
N_{oc} Note2	1~3	dBm/15kHz	-94.65			
N_{oc} Note2	1,2	dBm/SSB SCS	-94.65			
	3		-91.65			
$\hat{E}_s / I_{ot}$	1~3	dB	0	0	-Infinity	3
SSB RSRP Note3	1,2	dBm/SSB SCS	-94.65	-94.65	-Infinity	-91.65
	3		-91.65	-91.65	-Infinity	-88.65
Io Note3	1,2	dBm/9.36 MHz	-63.69	-63.69	-66.70	-61.93
	3	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.84
$\hat{E}_s / N_{oc}$	1~3	dB	0	0	-Infinity	3

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.6.6.8.2.2-3: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0		CSI-RS#1	
			T1	T2	T1	T2
N_{oc} Note2	1~3	dBm/15kHz	-94.65			
N_{oc} Note2	1,2	dBm/CSI-RS SCS	-94.65			
	3		-91.65			
$\hat{E}_s / I_{ot}$	1~3	dB	0	0	-Infinity	3
CSI-RS RSRP Note3	1,2	dBm/CSI-RS SCS	-94.65	-94.65	-Infinity	-91.65
	3		-91.65	-91.65	-Infinity	-88.65
Io Note3	1,2	dBm/9.36 MHz	-63.69	-63.69	-66.70	-61.93
	3	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.84

$\hat{E}_s / N_{oc}$	1~3	dB	0	0	-Infinity	3

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.6.8.2.3 Test Requirements

The UE shall send L1-SINR report every 80 slots. No later than 640ms plus 80 slots from the beginning of time period T2, UE shall send L1-SINR report including results of both SSB#0+CSI-RS#0 and SSB#1+CSI-RS#1 while meeting the accuracy requirement in clause 10.1.27.2. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.8.3 L1-SINR measurement with CSI-RS based CMR and dedicated IMR configured when DRX is not used

A.6.6.8.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-SINR measurement. This test will partly verify the L1-SINR measurement requirements with CSI-RS based CMR and dedicated IMR cofigured in clause 9.8.4.3, with the testing configurations for NR cells in Table A.6.6.8.3.1-1.

Table A.6.6.8.3.1-1: Applicable NR configurations for FR1 L1-SINR test with CMR and dedicated IMR

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.6.6.8.3.2 Test parameters

There is one cells in the test, the FR1 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.6.6.8.3.2-1 and Table A.6.6.8.3.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-SINR measurement on the configured CSI-RS as CMR and an associated CSI-IM as IMR, and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-SINR on aperiodic CSI-RS resources. UE is also configured to measure L1-SINR based on SSB. After 80ms from the beginning of the test, the DCI trigger comes in slot n (1 Config 1,2 and 8 for Config 3) of a frame and UE provides the report back based on the reporting configuration as defined in Table A.6.6.8.3.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs, and UE is configured to perform L1-SINR measurement based on the CSI-RS as CMR and the CSI-IM as IMR.

Table A.6.6.8.3.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~3		freq1
Duplex mode	1		FDD
	2		TDD
	3		TDD
TDD Configuration	1		N/A
	2		TDDConf.1.1
	3		TDDConf.2.1
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52
	2		10: $N_{RB,c}$ = 52
	3		40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1		SR.1.1 FDD
	2		SR.1.1 TDD
	3		SR.2.1 TDD
RMSI CORESET Reference Channel	1		CR.1.1 FDD
	2		CR.1.1 TDD
	3		CR.2.1 TDD
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD
	2		CCR.1.1 TDD
	3		CCR.2.1 TDD
SSB configuration	1		SSB.3 FR1
	2		SSB.3 FR1
	3		SSB.4 FR1
CSI-RS configuration	1		CSI-RS 1.3 FDD
	2		CSI-RS 1.3 TDD
	3		CSI-RS 2.3 TDD
CSI-IM configuration	1		CSI-IM.1.2 FDD
	2		CSI-IM.1.2 TDD
	3		CSI-IM.2.2 TDD
OCNG Patterns	1~3		OP.1
TRS Configuration	1		TRS.1.1 FDD
	2		TRS.1.1 TDD
	3		TRS.1.2 TDD
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~3		SMTC.1
DRX configuration	1~3		Off
reportConfigType	1~3		aperiodic
reportQuantity-r16	1~3		cri-SINR-r16
Number of reported RS	1~3		2
qcl-Info	1~3		SSB#0 for resource#0
			SSB#1 for resource#1
reportSlotOffsetList	1~3	slots	26
T1	1~3	s	5
EPRE ratio of PSS to SSS	1~3	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			

EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~3		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

A.6.6.8.3.2-2: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
N_{oc} Note1	1~3	dBm/15kHz	-94.65	
N_{oc} Note1	1,2	dBm/SSB SCS	-94.65	
	3		-91.65	
$\hat{E}_s / I_{ot}$	1~3	dB	0	3
CSI-RS RSRP Note2	1,2	dBm/SSB SCS	-94.65	-91.65
	3		-91.65	-88.65
Io Note2	1,2	dBm/9.36 MHz	-63.69	-61.93
	3	dBm/38.16 MHz	-57.59	-55.84
$\hat{E}_s / N_{oc}$	1~3	dB	0	3
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 2: CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

A.6.6.8.3.3 Test Requirements

After 80ms from the beginning of the test, the UE shall send L1-SINR report at slot 26 from the reception of DCI triggering the L1-SINR measurement. The L1-SINR report shall include the results for both CSI-RS#0 as CMR + CSI-IM#0 as IMR and CSI-RS#1 as CMR + CSI-IM#1 as IMR while meeting the accuracy requirement in clause 10.1.27.3.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.9 Idle Mode CA/DC Measurements

A.6.6.9.1 SA Idle mode CA/DC measurement for FR1

A.6.6.9.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE performs the required measurements on the serving cell and the configured inter-frequency carrier for idle mode measurement reporting after the UE has entered Idle mode. This test will partly verify the Idle mode CA/DC measurements requirements in clause 4.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.6.6.9.1.1-1, A.6.6.9.1.1-2, A.6.6.9.1.1-3 and A.6.6.9.1.1-4.

The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. During T1, the UE is connected to cell 1 only and shall not have any timing information of cell 2. UE is configured with early measurement reporting with channel 2. Beam level reporting for early measurements is not configured. The connection is released at the end of T1. T2 starts when the connection is released. During the time periods T2 UE is in Idle mode. At T3 the UE is paged for connection setup and requested by the network to send idle mode measurements.

Table A.6.6.9.1.1-1: supported test configuration

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.6.6.9.1.1-2: General test parameters for SA Idle mode CA/DC measurement for FR1

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2,3	1, 2	Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cell2	NR cell 2 is on NR RF channel number 2.
SMTC-SSB parameters		Config 1	SSB.1 FR1	As specified in clause A.3.10.1
		Config 2	SSB.1 FR1	As specified in clause A.3.10.1
		Config 3	SSB.2 FR1	As specified in clause A.3.10.1
Hysteresis	dB	Config 1,2,3	0	
PRACH configuration index		Config 1,2,3	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
CP length		Config 1,2,3	Normal	
TimeToTrigger	s	Config 1,2,3	0	
Filter coefficient		Config 1,2,3	0	L3 filtering is not used

DRX in connected mode		Config 1,2,3	OFF	DRX is not used
DRX in idle mode	s	Config 1,2,3	0.32	The value shall be used for all cells in the test.
T331	s		300	
Time offset between serving and neighbour cells		Config 1	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs	Synchronous cells.
T1	s	Config 1,2,3	10	
T2	s	Config 1,2,3	11.52	
T3	s	Config 1,2,3	10	

Table A.6.6.9.1.1-3: Cell specific test parameters for connected mode for SA Idle mode CA/DC measurement for FR1

Parameter		Unit	Test configuration	Cell 1			Cell 2		
				T1	T2	T3	T1	T2	T3
NR RF Channel Number			Config 1,2,3	1			2		
Duplex mode			Config 1	FDD					
			Config 2,3	TDD					
TDD configuration			Config 1	Not Applicable					
			Config 2	TDDConf.1.1					
			Config 3	TDDConf.2.1					
$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c}$ = 52					
			Config 3	40: $N_{RB,c}$ = 106					
BWP BW		MHz	Config 1,2	10: $N_{RB,c}$ = 52					
			Config 3	40: $N_{RB,c}$ = 106					
BWP configuration	Initial DL BWP		Config 1, 2, 3	DLBWP.0.1			NA		
	Initial UL BWP			ULBWP.0.1			NA		
	Dedicated DL BWP			DLBWP.1.1			NA		
	Dedicated UL BWP			ULBWP.1.1			NA		
TRS configuration			Config 1	TRS.1.1 FDD			NA		
			Config 2	TRS.1.1 TDD			NA		
			Config 3	TRS.1.2 TDD			NA		
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1			OP.1		
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD			SR.1.1 FDD		
			Config 2	SR.1.1 TDD			SR.1.1 TDD		
			Config 3	SR2.1 TDD			SR2.1 TDD		
CORESET Reference Channel			Config 1	CR.1.1 FDD			CR.1.1 FDD		
			Config 2	CR.1.1 TDD			CR.1.1 TDD		
			Config 3	CR2.1 TDD			CR2.1 TDD		
SSB parameters			Config 1	SSB.1 FR1			SSB.5 FR1		
			Config 2	SSB.1 FR1			SSB.5 FR1		
			Config 3	SSB.2 FR1			SSB.6 FR1		
SMTC configuration defined in A.3.11			Config 1	SMTC.2			SMTC.5		
			Config 2, 3	SMTC.1			SMTC.4		

PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2	15					
		Config 3	30					
EPRE ratio of PSS to SSS		Config 1,2,3	0			0		
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} Note2	dBm/15 kHz		-98			-98		
N_{oc} Note2	dBm/SCS	Config 1,2	-98			-98		
		Config 3	-95			-95		
SS-RSRP Note 3	dBm/SCS	Config 1,2	-91	-91	-91	-infinity	-98	-98
		Config 3	-88	-88	-88	-infinity	-95	-95
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4,5,6	7	7	7	-infinity	0	0
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3	7	7	7	infinity	0	0
Io Note3	dBm/9.36MHz	Config 1,2	-62.26	-62.26	-62.26	-70.5	-67.04	-67.04
	dBm/38.16MHz	Config 3	-56.15	-56.15	-56.15	-63.94	-60.93	-60.93
Propagation Condition		Config 1,2,3	AWGN			AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Table A.6.6.9.1.1-4: Cell specific test parameters for idle mode for SA Idle mode CA/DC measurement for FR1

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3

NR RF Channel Number		1,2,3	1			2		
TDD configuration		1	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
PDSCH RMC configuration		1	SR.1.1 FDD			SR.1.1 FDD		
		2	SR.1.1 TDD			SR.1.1 TDD		
		3	SR.2.1 TDD			SR.2.1 TDD		
RMSI CORESET RMC configuration		1	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD			CCR.1.1 FDD		
		2	CCR.1.1 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
OCNG Pattern		1, 2, 3	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2, 3	SSB			SSB		
Qrxlevmin	dBm/SCS	1, 2	-140			-140		
		3	-137			-137		
Pcompensation	dB	1, 2, 3	0			0		
Cell_selection_and_reselection_quality_measurement		1, 2, 3	SS-RSRP			SS-RSRP		
$\hat{E}_s / I_{ot}$	dB	1	14	14	14	-infinity	12	12
		2						
		3						
N_{oc} Note2	dBm/SCS	1	-98					
		2	-98					
		3	-95					
N_{oc} Note2	dBm/15 kHz	1	-98					
		2						
		3						
$\hat{E}_s / N_{oc}$	dB	1	7	7	7	-infinity	0	0
		2						
		3						
$\hat{E}_s / I_{ot}$	dB	1, 2, 3	7	7	7	-infinity	0	0
SS-RSRP Note3	dBm/SCS	1	-91	-91	-91	-infinity	-98	-98
		2	-91	-91	-91	-infinity	-98	-98
		3	-88	-88	-88	-infinity	-95	-95
Io	dBm/9.36 MHz	1	-62.26	-62.26	-62.26	-70.5	-67.04	-67.04
	dBm/9.36 MHz	2	-62.26	-62.26	-62.26	-70.5	-67.04	-67.04
	dBm/38.16 MHz	3	-56.15	-56.15	-56.15	-63.94	-60.93	-60.93
Treselection	s	1, 2, 3	0	0	0	0	0	0
SnonintrasearchP	dB	1, 2, 3	Not sent			Not sent		
Propagation Condition		1, 2, 3	AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.6.9.1.2 Test Requirements

The UE behaviour during time durations T2 and T3 shall be as follows:

During the time period T2 the UE is in Idle mode and the signal level of cell 2 is changed. The UE shall not perform reselection. The UE shall perform Idle Mode CA measurement according to Section 4.4.

At the start of T3 the UE is paged for connection setup. During the connection setup the UE is requested to transmit early measurement report for cell 2. The UE shall send early measurement report to the PCell.

After receiving the requested early measurement report, the test equipment verifies the accuracy of measurement reported for Cell 2 meets the requirements in Section 10.1.4B for SS-RSRP and in Section 10.1.8B for SS-RSRQ and test ends.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.6.10 CSI-RS based intra-frequency Measurements

A.6.6.10.1 SA event triggered reporting tests without gap under non-DRX

A.6.6.10.1.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA CSI-RS based L3 intra-frequency requirements in clauses 9.10.2.

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for PCell and neighbour cell are given in Table A.6.6.10.1.1-1 and A.6.6.10.1.1-2 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

Table A.6.6.10.1.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.6.6.10.1.1-2: General test parameters for SA intra-frequency event triggered reporting without gap for FR1

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3	Cell 1	
Neighbour cell		1, 2, 3	Cell 2	Cell to be identified and measured.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
CSI-RS configuration for RRM		1	CSI-RS.RRM.FR1.1 FDD	
		2	CSI-RS.RRM.FR1.1 TDD	

		3	CSI-RS.RRM.FR1.2 TDD	
A3-Offset	dB	1, 2, 3	-4.5	
CP length		1, 2, 3	Normal	
Hysteresis	dB	1, 2, 3	0	
Time To Trigger	s	1, 2, 3	0	
Filter coefficient		1, 2, 3	0	L3 filtering is not used
DRX		1, 2, 3		OFF
Time offset between serving and neighbour cells	µs	1	4.7	Asynchronous cells. The timing of Cell 2 is CP later than the timing of Cell 1.
		2	4.7	Synchronous cells
		3	2.35	Synchronous cells
T1	s	1, 2, 3	5	
T2	s	1, 2, 3	1	

Table A.6.6.10.1.1-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting without gap for FR1

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	TN/A		TN/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		CR.1.1 FDD	
		2	CR.1.1 TDD		CR.1.1 TDD	
		3	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		CCR.1.1 FDD	
		2	CCR.1.1 TDD		CCR.1.1 TDD	
		3	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns		1, 2, 3	OP.1		OP.1	
TRS Configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD		N/A	
		3	TRS.1.2 TDD		N/A	
IInitial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2, 3	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1	-98			
		2				
		3				
$\hat{E}_s / I_{ot}$	dB	1	4	-1.46	-Infinity	-1.46
		2				
		3				
$\hat{E}_s / N_{oc}$	dB	1	4	4	-Infinity	4
		2				
		3				
SS-RSRP Note 3	dBm/SCS kHz	1	-94	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94

		3	-91	-91	-Infinity	-91
CSI-RSRP Note 3	dBm/SCS kHz	1	-94	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1	-64.60	-62.25	--64.60	-62.25
	dBm/9.36 MHz	2	-64.60	-62.25	--64.60	-62.25
	dBm/38.16 MHz	3	-58.50	-56.16	--58.50	-56.16
Propagation Condition		1, 2, 3	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: CSI-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.6.10.1.2 Test Requirements

In this test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE is required to read the neighbour cell SSB index and report the acquired SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.11 CSI-RS based inter-frequency Measurements

A.6.6.11.1 SA event triggered reporting tests with gap under DRX

A.6.6.11.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA CSI-RS based L3 inter-frequency measurement requirements in clause 9.10.3.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.6.6.11.1.1-1, A.6.6.11.1.1-2 and A.6.6.11.1.1-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table A.6.6.11.1.1-2 is provided for UE that does not support per-FR gap and in test 3&4 measurement gap pattern configuration #4 as defined in Table A.6.6.11.1.1-2 is provided for UE that supports per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 3&4. Otherwise it is only required to pass test 1&2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

UE needs to be provided at least once every 500 ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.6.6.11.1.1-1: SA event triggered reporting tests for FR1-FR1

Config	Description

1	NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.6.6.11.1.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1,2,3	1, 2		Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cell2		NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3	0	4	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	39	19	
A3-Offset	dB	Config 1,2,3	-6		
Hysteresis	dB	Config 1,2,3	0		
CP length		Config 1,2,3	Normal		
TimeToTrigger	s	Config 1,2,3	0		
Filter coefficient		Config 1,2,3	0		L3 filtering is not used
DRX		Config 1,2,3	DRX.5	DRX.5	As specified in clause A.3.3
Time offset between serving and neighbour cells	µs	Config 1	4.7		Asynchronous cells. The timing of Cell 2 is CP later than the timing of Cell 1.
		Config 2	4.7		Synchronous cells.
		Config 3	2.35		Synchronous cells.
T1	s	Config 1,2,3	5		
T2	s	Config 1,2,3	10	10	

Table A.6.6.11.1.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 with SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2	
Duplex mode			Config 1	FDD			
			Config 2,3	TDD			
TDD configuration			Config 1	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c}$ = 52			
			Config 3	40: $N_{RB,c}$ = 106			
BWP BW		MHz	Config 1,2	10: $N_{RB,c}$ = 52			
			Config 3	40: $N_{RB,c}$ = 106			
	Initial DL BWP		Config 1, 2, 3	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	

BWP configuration	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	
			Config 3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD			
			Config 2	SR.1.1 TDD			
			Config 3	SR2.1 TDD			
CORESET Reference Channel			Config 1	CR.1.1 FDD		-	
			Config 2	CR.1.1 TDD			
			Config 3	CR2.1 TDD			
SSB parameters			Config 1	SSB.1 FR1		SSB.5 FR1	
			Config 2	SSB.1 FR1		SSB.5 FR1	
			Config 3	SSB.2 FR1		SSB.6 FR1	
SMTC configuration defined in A.3.11			Config 1	SMTC.2		SMTC.5	
			Config 2, 3	SMTC.1		SMTC.4	
CSI-RS configuration for RRM			Config 1	CSI-RS.RRM.FR1.1 FDD		CSI-RS.RRM.FR1.1 FDD	
			Config 2	CSI-RS.RRM.FR1.1 TDD		CSI-RS.RRM.FR1.1 TDD	
			Config 3	CSI-RS.RRM.FR1.2 TDD		CSI-RS.RRM.FR1.2 TDD	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	15			
			Config 3	30			
EPRE ratio of PSS to SSS			Config 1,2,3	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		dBm/15 kHz		-98		-98	
N_{oc} Note2		dBm/SCS	Config 1,2	-98		-98	
			Config 3	-95		-95	
CSI-RSRP Note 3		dBm/SCS	Config 1,2	-94	-94	-Infinity	-91
			Config 3	-91	-91	-Infinity	-88
SS-RSRP Note 3		dBm/SCS	Config 1,2	-94	-94	-Infinity	-91
			Config 3	-91	-91	-Infinity	-88
$\hat{E}_s / I_{ot}$		dB	Config 1,2,3	4	4	-Infinity	7
$\hat{E}_s / N_{oc}$		dB	Config 1,2,3	4	4	-Infinity	7
Io Note3		dBm/9.36MHz	Config 1,2	-64.59	-64.59	-70.05	-62.26

	dBm/38.16MHz	Config 3	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3	AWGN		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: CSI-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						

A.6.6.11.1.2 Test Requirements

In test 1 with per-UE gap and test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 9280 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2 UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to 2xTTIDCCH higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.12 RSTD measurements

A.6.6.12.1 NR RSTD measurement reporting delay test case for single positioning frequency layer in FR1 SA

A.6.6.12.1.1 Test Purpose and Environment

The purpose of the test is to verify that the RSTD measurement meets the requirements specified in Clause 9.9.2 in an environment with AWGN propagation conditions in FR1 in standalone scenario when single positioning frequency layer is configured.

The supported test configurations are specified in Table A.6.6.12.1.1-1.

Table A.6.6.12.1.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

In the test there are three synchronous cells: Cell 1, Cell 2 and Cell 3. Cell 1 is the reference as well as the PCell. Cell 2 and Cell 3 are the neighbour cells. All 3 cells are on the same RF channel in FR1.

The test consists of two consecutive time intervals, with duration of T1 and T2. During time duration T1, the UE shall not have any timing information of Cell 2 and Cell 3. All three cells transmit PRS during T2.

Note: The information on when PRS is muted is conveyed to the UE using PRS muting information.

The *NR-DL-TDOA-ProvideAssistanceData* and *nr-DL-TDOA-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last TTI containing the two messages shall be

provided to the UE ΔT ms before the start of T2, where ΔT = 50 ms is the maximum processing time of the *DL-TDOA assistance* data and location information request.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance containing the PRS resources.

The UE is configured with measurement gap pattern ID # 24 or #0 before T2.

The general test parameters are listed in Table A.6.6.12.1.1-2, and cell specific test parameters are listed in Table A.6.6.12.1.1-3.

Table A.6.6.12.1.1-2: General test parameters for RSTD measurement reporting delay

Parameter		Unit	Value	Comment
Reference cell			Cell 1	Reference cell is the cell in the DL-TDOA assistance data with respect to which the RSTD measurement is defined, as specified in TS 38.215 [4] and TS 37.355 [34]. The reference cell is the PCell in this test case.
Neighbor cells			Cell 2 and Cell 3	Cell 2 and Cell 3 appear at the first and second places in the neighbour cell list in the DL-TDOA assistance data.
SSB configuration	Config 1		SSB.1 FR1	
	Config 2		SSB.1 FR1	
	Config 3		SSB.2 FR1	
SMTC configuration	Config 1		SMTC.2	
	Config 2		SMTC.1	
	Config 3		SMTC.1	
PDSCH RMC configuration	Config 1		SR.1.1 FDD	
	Config 2		SR.1.1 TDD	
	Config 3		SR.2.1 TDD	
RMSI CORESET RMC configuration	Config 1		CR.1.1 FDD	As specified in clause A.3.1.2.1
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
Dedicated CORESET RMC configuration	Config 1		CCR.1.1 FDD	
	Config 2		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD	
Initial BWP configuration	Config 1,2,3		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration	Config 1,2,3		DLBWP.1.1	
Active UL BWP configuration	Config 1,2,3		ULBWP.1.1	
PRS Configuration	Config 1		PRS.1.1 FR1	As specified in clause A.3.31
	Config 2		PRS.1.1 FR1	
	Config 3		PRS.2.1 FR1	

Physical cell ID PCI		(PCI of Cell 1 – PCI of Cell 2)mod6=0 and (PCI of Cell 1 – PCI of Cell 3)mod6=0	The cell PCIs are selected such that the relative shifts of PRS patterns among cells are as given by the test parameters
CP length		Normal	
DRX		OFF	
Measurement gap		GP#24 or GP#0	GP#24 is configured if UE supports MG#24, otherwise GP#0 is configured
Radio frame receive time offset between the cells at the UE antenna connector	µs	Cell 2 to Cell 1: 0 Cell 3 to Cell 1: 3	PRS are transmitted from synchronous cells
Expected RSTD	µs	Cell 2: 3 Cell 3: 3 Other neighbour cells: randomly between -3 and 3	The expected RSTD is what is expected at the receiver. The corresponding parameter in the DL-TDOA assistance data specified in TS 37.355 [34] is the expectedRSTD indicator
Expected RSTD uncertainty for all neighbour cells	µs	5	The corresponding parameter in the DL-TDOA assistance ta specified in TS 37.355 [34] is the expectedRSTD-Uncertainty index
Number of cells provided in DL-TDOA assistance data		16	Including the reference cell
PRS muting info		Cell 1: ‘10’ Cell 2: ‘01’ Cell 3: ‘10’	Correponds to prs-MutingInfo defined in TS 37.355 [34]
PRS resource RE offset		Cell 1: 0 Cell 2: 0 Cell 3: 1	Cell 1 and Cell 3 are configured with different resource offsets
T1	s	3	The length of the time interval from the beginning of each test
T2	s	1.28	The length of the time interval that follows immediately after time interval T1

Table A.6.6.12.1.1-3: Cell-specific test parameters for RSTD measurement reporting delay during T1

Parameter	Unit	Cell 1	Cell 2	Cell 3
NR RF Channel Number		1	1	1
Positiong frequency layer		1	1	1
Correlation Matrix and Antenna Configuration		1x2 Low	1x2 Low	1x2 Low
OCNG patterns defined in A.3.2.1		OP.1	N/A	N/A
EPRE ratio of PSS to SSS	dB	0	N/A	N/A
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				

EPRE ratio of PDSCH to PDSCH DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
N_{oc} Note 3	Config 1	dBm/SCS	-98		
	Config 2	dBm/SCS	-98		
	Config 3	dBm/SCS	-95		
PRS $\hat{E}_s/N_{oc}$		dB	-Infinity	-Infinity	-Infinity
SSB $\hat{E}_s/N_{oc}$		dB	10	-Infinity	-Infinity
Io Note 4	Config 1	dBm/ 9.36MHz	-59.63	-59.63	-59.63
	Config 2	dBm/ 9.36MHz	-59.63	-59.63	-59.63
	Config 3	dBm/ 38.16MHz	-53.54	-53.54	-53.54
SSB RP Note4	Config 1	dBm/SCS	-88	-Infinity	-Infinity
	Config 2	dBm/SCS	-88	-Infinity	-Infinity
	Config 3	dBm/SCS	-85	-Infinity	-Infinity
Propagation Condition			AWGN		

Note 1: OCNG shall be used such that active cell (Cell 1) is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols other than those in the slots with transmitted PRS.
Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 3: Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 4: SSB RP and Io levels have been derived from other parameters and are given for information purpose. These are not settable test parameters.

Table A.6.6.12.1.1-4: Cell-specific test parameters for RSTD measurement reporting delay during T2

Parameter	Unit	Cell 1	Cell 2	Cell 3
		T2	T2	T2
NR RF Channel Number		1	1	1
Correlation Matrix and Antenna Configuration		1x2 Low	1x2 Low	1x2 Low
OCNG patterns defined in A.3.2.1		OP.1	OP.1	OP.1
PRACH configuration		FR1 PRACH configuration 1	FR1 PRACH configuration 1	FR1 PRACH configuration 1

EPRE ratio of PSS to SSS		dB	0	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
N_{oc} Note 3	Config 1	dBm/SCS	-98	-98	-98
	Config 2	dBm/SCS	-98	-98	-98
	Config 3	dBm/SCS	-95	-95	-95
PRS $\hat{E}_s/N_{oc}$	Config 1	dB	-5.45	-11.67	-11.67
	Config 2	dB	-5.45	-11.67	-11.67
	Config 3	dB	-5.45	-11.67	-11.67
SSB $\hat{E}_s/N_{oc}$	Config 1~3	dB	10	3	3
Io Note 4	Config 1	dBm/ 9.36MHz	-68.52	-68.52	-68.52
	Config 2	dBm/ 9.36MHz	-68.52	-68.52	-68.52
	Config 3	dBm/ 38.16MHz	-62.43	-62.43	-62.43
SSB RP Note4	Config 1	dBm/SCS	-88	-95	-95
	Config 2	dBm/SCS	-88	-95	-95
	Config 3	dBm/SCS	-85	-92	-92

PRS $\hat{E}_s/I_{ot}$	dB	-6.00	-12.98	-12.98
Propagation Condition		AWGN		

Note 1: OCNG shall be used such that active cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols other than those in the slots with transmitted PRS.
Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 3: Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 4: SSB RP and Io levels have been derived from other parameters and are given for information purpose. These are not settable test parameters. The Io is calculated based only on the symbols in which PRS is transmitted.

A.6.6.12.1.2 Test Requirements

The RSTD measurement time fulfils the requirements specified in Clause 9.9.2.5.

The UE shall perform and report the RSTD measurements for Cell 2 and Cell 3 with respect to the reference cell in the DL-TDOA assistance data, Cell 1, within the time duration specified in section 9.9.2.5 starting from the beginning of time interval T2.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported RSTD measurement for each correct event shall be within the RSTD reporting range specified in Clause 10.1.23.3, i.e., between RSTD_0000000 and RSTD1970049

A.6.6.12.2 NR RSTD measurement reporting delay test case for dual positioning frequency layers in FR1 SA

A.6.6.12.2.1 Test Purpose and Environment

The purpose of the test is to verify that the RSTD measurement meets the requirements specified in Clause 9.9.2 in an environment with AWGN propagation conditions in FR1 in standalone scenario when dual positioning frequency layers are configured.

The supported test configurations are specified in Table A.6.6.12.2.1-1.

Table A.6.6.12.2.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

In the test there are three synchronous cells: Cell 1, Cell 2 and Cell 3. Cell 1 is the reference as well as the PCell. Cell 2 and Cell 3 are the neighbour cells. Cell 3 is on a different RF channel with Cell 1 and Cell 2.

The test consists of two consecutive time intervals, with duration of T1 and T2. During time duration T1, the UE shall not have any timing information of Cell 2 and Cell 3. All three cells transmit PRS during T2.

Note: The information on when PRS is muted is conveyed to the UE using PRS muting information.

The *NR-DL-TDOA-ProvideAssistanceData* and *nr-DL-TDOA-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where ΔT = 50 ms is the maximum processing time of the *DL-TDOA assistance* data and location information request.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance containing the PRS resources.

The UE is configured with measurement gap pattern ID # 24 or #0 before T2.

The general test parameters are listed in Table A.6.6.12.2.1-2, and cell specific test parameters are listed in Table A.6.6.12.2.1-3.

Table A.6.6.12.2.1-2: General test parameters for RSTD measurement reporting delay

Parameter		Unit	Value	Comment
Reference cell			Cell 1	Reference cell is the cell in the DL-TDOA assistance data with respect to which the RSTD measurement is defined, as specified in TS 38.215 [4] and TS 37.355 [34]. The reference cell is the PCell in this test case.
Neighbor cells			Cell 2 and Cell 3	Cell 2 and Cell 3 appear at the first place in the respective neighbour cell list in the DL-TDOA assistance data for two positioning frequency layers.
SSB configuration	Config 1		SSB.1 FR1	
	Config 2		SSB.1 FR1	
	Config 3		SSB.2 FR1	
SMTC configuration	Config 1		SMTC.2	
	Config 2		SMTC.1	
	Config 3		SMTC.1	
PDSCH RMC configuration	Config 1		SR.1.1 FDD	
	Config 2		SR.1.1 TDD	
	Config 3		SR.2.1 TDD	
RMSI CORESET RMC configuration	Config 1		CR.1.1 FDD	As specified in clause A.3.1.2.1
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
Dedicated CORESET RMC configuration	Config 1		CCR.1.1 FDD	
	Config 2		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD	
Initial BWP configuration	Config 1,2,3		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration	Config 1,2,3		DLBWP.1.1	
Active UL BWP configuration	Config 1,2,3		ULBWP.1.1	
PRS Configuration	Config 1		PRS.1.1 FR1	As specified in clause A.3.31
	Config 2		PRS.1.1 FR1	
	Config 3		PRS.2.1 FR1	

Physical cell ID PCI		(PCI of Cell 1 – PCI of Cell 2)mod6=0 and (PCI of Cell 1 – PCI of Cell 3)mod6=0	The cell PCIs are selected such that the relative shifts of PRS patterns among cells are as given by the test parameters
CP length		Normal	
DRX		OFF	
Measurement gap		GP#24 or GP#0	GP#24 is configured if UE supports MG#24, otherwise GP#0 is configured
Radio frame receive time offset between the cells at the UE antenna connector	µs	Cell 2 to Cell 1: 0 Cell 3 to Cell 1: 3	PRS are transmitted from synchronous cells
Expected RSTD	µs	Cell 2: 3 Cell 3: 3 Other neighbour cells: randomly between -3 and 3	The expected RSTD is what is expected at the receiver. The corresponding parameter in the DL-TDOA assistance data specified in TS 37.355 [34] is the expectedRSTD indicator
Expected RSTD uncertainty for all neighbour cells	µs	5	The corresponding parameter in the DL-TDOA assistance data specified in TS 37.355[34] is the expectedRSTD-Uncertainty index
Number of cells provided in DL-TDOA assistance data		4	Including the reference cell
PRS muting info		Cell 1: ‘10’ Cell 2: ‘01’ Cell 3: ‘10’	Correponds to prs-MutingInfo defined in TS 37.355 [34]
PRS resource RE offset		Cell 1: 0 Cell 2: 0 Cell 3: 1	Cell 1 and Cell 3 are configured with different resource offsets
T1	s	3	The length of the time interval from the beginning of each test
T2	s	1.28	The length of the time interval that follows immediately after time interval T1

Table A.6.6.12.2.1-3: Cell-specific test parameters for RSTD measurement reporting delay during T1

Parameter	Unit	Cell 1	Cell 2	Cell 3
NR RF Channel Number		1	1	2
Positiong frequency layer		1	1	2
Correlation Matrix and Antenna Configuration		1x2 Low	1x2 Low	1x2 Low
OCNG patterns defined in A.3.2.1		OP.1	N/A	N/A
EPRE ratio of PSS to SSS	dB	0	N/A	N/A
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				

EPRE ratio of PDSCH to PDSCH DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
N_{oc} Note 3	Config 1	dBm/SCS	-98		
	Config 2	dBm/SCS	-98		
	Config 3	dBm/SCS	-95		
PRS $\hat{E}_s/N_{oc}$		dB	-Infinity	-Infinity	-Infinity
SSB $\hat{E}_s/N_{oc}$		dB	10	-Infinity	-Infinity
Io Note 4	Config 1	dBm/ 9.36MHz	-59.63	-59.63	-70.05
	Config 2	dBm/ 9.36MHz	-59.63	-59.63	-70.05
	Config 3	dBm/ 38.16MHz	-53.54	-53.54	-63.96
SSB RP Note4	Config 1	dBm/SCS	-88	-Infinity	-Infinity
	Config 2	dBm/SCS	-88	-Infinity	-Infinity
	Config 3	dBm/SCS	-85	-Infinity	-Infinity
Propagation Condition			AWGN		

Note 1: OCNG shall be used such that active cell (Cell 1) is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols other than those in the slots with transmitted PRS.

Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 3: Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 4: SSB RP and Io levels have been derived from other parameters and are given for information purpose. These are not settable test parameters.

Table A.6.6.12.2.1-4: Cell-specific test parameters for RSTD measurement reporting delay during T2

Parameter	Unit	Cell 1	Cell 2	Cell 3
		T2	T2	T2
NR RF Channel Number		1	1	2
Positiong frequency layer		1	1	2
Correlation Matrix and Antenna Configuration		1x2 Low	1x2 Low	1x2 Low
OCNG patterns defined in A.3.2.1		OP.1	OP.1	OP.1
EPRE ratio of PSS to SSS	dB	0	0	0
EPRE ratio of PBCH DMRS to SSS				

EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
EPRE ratio of PRS to SSS					
PRACH configuration			FR1 PRACH configuration 1	FR1 PRACH configuration 1	FR1 PRACH configuration 1
N_{oc} Note 3	Config 1	dBm/SCS	-98	-98	-98
	Config 2	dBm/SCS	-98	-98	-98
	Config 3	dBm/SCS	-95	-95	-95
PRS $\hat{E}_s/N_{oc}$	Config 1	dB	-5.45	-11.67	-11.67
	Config 2	dB	-5.45	-11.67	-11.67
	Config 3	dB	-5.45	-11.67	-11.67
Io Note 4	Config 1	dBm/ 9.36MHz	-68.73	-68.73	-69.76
	Config 2	dBm/ 96.48MHz	-68.73	-68.73	-69.76
	Config 3	dBm/ 38.16MHz	-62.64	-62.64	-63.67
PRS $\hat{E}_s/I_{ot}$		dB	-6	-13	-13
Propagation Condition			AWGN		

Note 1: OCNG shall be used such that active cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols other than those in the slots with transmitted PRS.
Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 3: Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 4: SSB RP and Io levels have been derived from other parameters and are given for information purpose. These are not settable test parameters. The Io is calculated based only on the symbols in which PRS is transmitted.

A.6.6.12.2.2 Test Requirements

The RSTD measurement time fulfils the requirements specified in Clause 9.9.2.5.

The UE shall perform and report the RSTD measurements for Cell 2 and Cell 3 with respect to the reference cell in the DL-TDOA assistance data, Cell 1, within the time duration specified in section 9.9.1.5 starting from the beginning of time interval T2.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported RSTD measurement for each correct event shall be within the RSTD reporting range specified in Clause 10.1.23.3, i.e., between RSTD_0000000 and RSTD_1970049.

A.6.6.12.3 NR RSTD measurement reporting delay test case for single positioning frequency layer with reduced number of samples in FR1 SA

A.6.6.12.3.1 Test Purpose and Environment

The purpose of the test is to verify that the RSTD measurement with the reduced samples meets the requirements specified in Clause 9.9.2 in an environment with AWGN propagation conditions in FR1 in standalone scenario when single positioning frequency layer is configured.

The supported test configurations are specified in Table A.6.6.12.3.1-1.

Table A.6.6.12.3.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

In the test there are three synchronous cells: Cell 1, Cell 2 and Cell 3. Cell 1 is the reference as well as the PCell. Cell 2 and Cell 3 are the neighbour cells. All 3 cells are on the same RF channel in FR1.

The test consists of two consecutive time intervals, with duration of T1 and T2. During time duration T1, the UE shall not have any timing information of Cell 2 and Cell 3. All three cells transmit PRS during T2.

Note: The information on when PRS is muted is conveyed to the UE using PRS muting information.

The *NR-DL-TDOA-ProvideAssistanceData* and *nr-DL-TDOA-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where $\Delta T = 50$ ms is the maximum processing time of the *DL-TDOA assistance* data and location information request. UE can support [M-sample measurements], and the LMF indicates the UE to perform positioning measurements with reduced number of samples

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance containing the PRS resources.

The UE is configured with measurement gap pattern ID # 24 or #0 before T2.

The general test parameters are listed in Table A.6.6.12.3.1-2, and cell specific test parameters are listed in Table A.6.6.12.3.1-3.

Table A.6.6.12.3.1-2: General test parameters for RSTD measurement reporting delay

Parameter	Unit	Value	Comment

Reference cell			Cell 1	Reference cell is the cell in the DL-TDOA assistance data with respect to which the RSTD measurement is defined, as specified in TS 38.215 [4] and TS 37.355 [34]. The reference cell is the PCell in this test case.
Neighbor cells			Cell 2 and Cell 3	Cell 2 and Cell 3 appear at the first and second places in the neighbour cell list in the DL-TDOA assistance data.
SSB configuration	Config 1		SSB.1 FR1	
	Config 2		SSB.1 FR1	
	Config 3		SSB.2 FR1	
SMTC configuration	Config 1		SMTC.2	
	Config 2		SMTC.1	
	Config 3		SMTC.1	
PDSCH RMC configuration	Config 1		SR.1.1 FDD	
	Config 2		SR.1.1 TDD	
	Config 3		SR.2.1 TDD	
RMSI CORESET RMC configuration	Config 1		CR.1.1 FDD	As specified in clause A.3.1.2.1
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
Dedicated CORESET RMC configuration	Config 1		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
Initial BWP configuration	Config 1,2,3		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration	Config 1,2,3		DLBWP.1.1	
Active UL BWP configuration	Config 1,2,3		ULBWP.1.1	
PRS Configuration	Config 1		PRS.1.2 FR1	As specified in clause A.3.31
	Config 2		PRS.1.2 FR1	
	Config 3		PRS.2.1 FR1	
Physical cell ID PCI			(PCI of Cell 1 – PCI of Cell 2)mod6=0 and (PCI of Cell 1 – PCI of Cell 3)mod6=0	The cell PCIs are selected such that the relative shifts of PRS patterns among cells are as given by the test parameters
CP length			Normal	
DRX			OFF	
Measurement gap			GP#24 or GP#0	GP#24 is configured if UE supports MG#24, otherwise GP#0 is configured
Radio frame receive time offset between the cells at the UE antenna connector		μs	Cell 2 to Cell 1: 0 Cell 3 to Cell 1: 3	PRS are transmitted from synchronous cells

Expected RSTD	µs	Cell 2: 3 Cell 3: 3 Other neighbour cells: randomly between -3 and 3	The expected RSTD is what is expected at the receiver. The corresponding parameter in the DL-TDOA assistance data specified in TS 37.355 [34] is the expectedRSTD indicator
Expected RSTD uncertainty for all neighbour cells	µs	5	The corresponding parameter in the DL-TDOA assistance ta specified in TS 37.355 [34] is the expectedRSTD-Uncertainty index
Number of cells provided in DL-TDOA assistance data		16	Including the reference cell
PRS muting info		Cell 1: '10' Cell 2: '01' Cell 3: '10'	Correponds to prs-MutingInfo defined in TS 37.355 [34]
PRS resource RE offset		Cell 1: 0 Cell 2: 0 Cell 3: 1	Cell 1 and Cell 3 are configured with different resource offsets
T1	s	3	The length of the time interval from the beginning of each test
T2	s	[1.28]	The length of the time interval that follows immediately after time interval T1

Table A.6.6.12.3.1-3: Cell-specific test parameters for RSTD measurement reporting delay during T1

Parameter		Unit	Cell 1	Cell 2	Cell 3
NR RF Channel Number			1	1	1
Positiong frequency layer			1	1	1
Correlation Matrix and Antenna Configuration			1x2 Low	1x2 Low	1x2 Low
OCNG patterns defined in A.3.2.1			OP.1	N/A	N/A
N_{oc} Note 3	Config 1	dBm/SCS	-98		
	Config 2	dBm/SCS	-98		
	Config 3	dBm/SCS	-95		
PRS $\hat{E}_s/N_{oc}$		dB	-Infinity	-Infinity	-Infinity
SSB $\hat{E}_s/N_{oc}$		dB	10	-Infinity	-Infinity
Io Note 4	Config 1	dBm/ 9.36MHz	-68.63	-70.05	-70.05
	Config 2	dBm/ 9.36MHz	-68.63	-70.05	-70.05
	Config 3	dBm/ 38.16MHz	-63.20	-63.96	-63.96
SSB RP Note4	Config 1	dBm/SCS	-88	-Infinity	-Infinity
	Config 2	dBm/SCS	-88	-Infinity	-Infinity
	Config 3	dBm/SCS	-88	-Infinity	-Infinity
Propagation Condition			AWGN		

Note 1: OCNG shall be used such that active cell (Cell 1) is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 3: Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 4: SSB RP and Io levels have been derived from other parameters and are given for information purpose. These are not settable test parameters.

Table A.6.6.12.3.1-4: Cell-specific test parameters for RSTD measurement reporting delay during T2

Parameter		Unit	Cell 1	Cell 2	Cell 3
			T2	T2	T2
NR RF Channel Number			1	1	1
Correlation Matrix and Antenna Configuration			1x2 Low	1x2 Low	1x2 Low
OCNG patterns defined in A.3.2.1			OP.1	OP.1	OP.1
PRACH configuration			FR1 PRACH configuration 1	FR1 PRACH configuration 1	FR1 PRACH configuration 1
N_{oc} Note 3	Config 1	dBm/SCS	-98	-98	-98
	Config 2	dBm/SCS	-98	-98	-98
	Config 3	dBm/SCS	-95	-95	-95
PRS $\hat{E}_s/N_{oc}$	Config 1	dB	-2	-5.45	-5.45
	Config 2	dB	-2	-5.45	-5.45
	Config 3	dB	-2	-5.45	-5.45
Io Note 4	Config 1	dBm/ 9.36MHz	-67.67	-69.59	-69.59
	Config 2	dBm/ 96.48MHz	-67.67	-69.59	-69.59
	Config 3	dBm/ 38.16MHz	-61.57	-63.72	-63.72
PRS $\hat{E}_s/I_{ot}$		dB	-3	-6	-6
Propagation Condition			AWGN		

Note 1: OCNG shall be used such that active cells (all, except Cell 3 in T3) are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols other than those in the subframes with transmitted PRS.
Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 3: Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

A.6.6.12.3.2 Test Requirements

The RSTD measurement time fulfils the requirements specified in Clause 9.9.2.5

The UE shall perform and report the RSTD measurements for Cell 2 and Cell 3 with respect to the reference cell in the DL-TDOA assistance data, Cell 1, within the time duration X1 specified in section 9.9.1.5 starting from the beginning of time interval T2, where X1 is 320ms.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported RSTD measurement for each correct event shall be within the RSTD reporting range specified in Clause 10.1.23.3, i.e., between RSTD_0000000 and RSTD1970049.

A.6.6.12.4 NR RSTD measurement reporting delay test case for single positioning frequency layer in FR1 SA without measurement gap

A.6.6.12.4.1 Test Purpose and Environment

The purpose of the test is to verify that the RSTD measurement meets the gapless RSTD measurement period requirement specified in Clause 9.9.2.7 in an environment with AWGN propagation conditions in FR1 in standalone scenario when single positioning frequency layer is configured. Reporting delay test for gapless PRS measurement is conducted assuming that the PRS has higher priority, i.e., state 1, than all other DL signals/channels and is transmitted within active DL BWP of UE. Two sub-tests are defined, sub-test 1 is for N_{sample} = 4 and sub-test 2 is for N_{sample} = 1. For sub-test 2 LMF indicates UE to perform PRS measurement with N_{sample} = 1. The cell specific parameters for sub-test 1 and sub-test 2 are defined in Table A.6.6.12.4.1-4.

The supported test configurations are specified in Table A.6.6.12.4.1-1.

Table A.6.6.12.4.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

In the test there are three synchronous cells: Cell 1, Cell 2 and Cell 3. Cell 1 is the reference as well as the PCell. Cell 2 and Cell 3 are the neighbour cells. All 3 cells are on the same RF channel in FR1.

The test consists of two consecutive time intervals, with duration of T1 and T2. During time duration T1, the UE shall not have any timing information of Cell 2 and Cell 3. All three cells transmit PRS during T2.

Note: The information on when PRS is muted is conveyed to the UE using PRS muting information.

The *NR-DL-TDOA-ProvideAssistanceData* and *nr-DL-TDOA-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where ΔT = 50 ms is the maximum processing time of the *DL-TDOA assistance* data and location information request.

The beginning of the time interval T2 shall be aligned with the beginning of the first PPW instance containing the PRS resources.

The UE is configured with PPW before start of T2.

The general test parameters are listed in Table A.6.6.12.4.1-2, and cell specific test parameters are listed in Table A.6.6.12.4.1-3.

Table A.6.6.12.4.1-2: General test parameters for RSTD measurement reporting delay

Parameter	Unit	Value	Comment

Reference cell			Cell 1	Reference cell is the cell in the DL-TDOA assistance data with respect to which the RSTD measurement is defined, as specified in TS 38.215 [4] and TS 37.355 [34]. The reference cell is the PCell in this test case.
Neighbor cells			Cell 2 and Cell 3	Cell 2 and Cell 3 appear at the first and second places in the neighbour cell list in the DL-TDOA assistance data.
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52	
	Config 2		10: $N_{RB,c}$ = 52	
	Config 3		40: $N_{RB,c}$ = 106	
SSB configuration	Config 1		SSB.1 FR1	
	Config 2		SSB.1 FR1	
	Config 3		SSB.2 FR1	
SMTC configuration	Config 1		SMTC.2	
	Config 2		SMTC.1	
	Config 3		SMTC.1	
PDSCH RMC configuration	Config 1		SR.1.1 FDD	
	Config 2		SR.1.1 TDD	
	Config 3		SR.2.1 TDD	
RMSI CORESET RMC configuration	Config 1		CR.1.1 FDD	As specified in clause A.3.1.2.1
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
Dedicated CORESET RMC configuration	Config 1		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
Initial BWP configuration	Config 1,2,3		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration	Config 1,2,3		DLBWP.1.1	Cell 2 and cell 3 also transmit PRS on active DL BWP configured to the UE
Active UL BWP configuration	Config 1,2,3		ULBWP.1.1	
PRS Configuration	Config 1		PRS.1.4 FR1	As specified in clause A.3.31
	Config 2		PRS.1.4 FR1	
	Config 3		PRS.2.4 FR1	
PRS BW	Config 1,2,3		48 PRBs	Applicable to sub-test 2.
Physical cell ID PCI			(PCI of Cell 1 – PCI of Cell 2)mod6=0 and (PCI of Cell 1 – PCI of Cell 3)mod6=0	The cell PCIs are selected such that the relative shifts of PRS patterns among cells are as given by the test parameters
CP length			Normal	
DRX			OFF	
PPW configuration			Table A.3.X-1: Reference PPW configuration	As defined in A.3.X

Time offset between serving and neighbour cells	µs	– set to the UE reported capability for receive time difference threshold if the UE reported value is < 3µs – 3µs otherwise	PRS are transmitted from synchronous cells
Expected RSTD	µs	0	The expected RSTD is what is expected at the receiver. The corresponding parameter in the DL-TDOA assistance data specified in TS 37.355 [34] is the expectedRSTD indicator
Expected RSTD uncertainty for all neighbour cells	µs	Same as time offset	The corresponding parameter in the DL-TDOA assistance ta specified in TS 37.355 [34] is the expectedRSTD-Uncertainty index
Number of cells provided in DL-TDOA assistance data		16	Including the reference cell
PRS muting info		Cell 1: '10' Cell 2: '01' Cell 3: '10'	Correponds to prs-MutingInfo defined in TS 37.355 [34]
PRS resource RE offset		Cell 1: 0 Cell 2: 0 Cell 3: 1	Cell 1 and Cell 3 are configured with different resource offsets
T1	s	3	The length of the time interval from the beginning of each test
T2	ms	10	The length of the time interval that follows after time interval T1 and processing time of assistance data. In this test UE is configured to measure single PFL within the configured PPW.

Table A.6.6.12.4.1-3: Cell-specific test parameters for RSTD measurement reporting delay during T1

Parameter		Unit	Cell 1	Cell 2	Cell 3
NR RF Channel Number			1	1	1
Positiong frequency layer			1	1	1
Correlation Matrix and Antenna Configuration			1x2 Low	1x2 Low	1x2 Low
OCNG patterns defined in A.3.2.1			OP.1	N/A	N/A
N_{oc} Note 3	Config 1	dBm/SCS	-98		
	Config 2	dBm/SCS	-98		
	Config 3	dBm/SCS	-95		
PRS $\hat{E}_s/N_{oc}$		dB	-Infinity	-Infinity	-Infinity
SSB $\hat{E}_s/N_{oc}$		dB	10	-Infinity	-Infinity
Io Note 4	Config 1	dBm/ 9.36MHz	-68.63	-70.05	-70.05
	Config 2	dBm/ 9.36MHz	-68.63	-70.05	-70.05

	Config 3	dBm/ 38.16MHz	-63.20	-63.96	-63.96
SSB RP Note4	Config 1	dBm/SCS	-88	-Infinity	-Infinity
	Config 2	dBm/SCS	-88	-Infinity	-Infinity
	Config 3	dBm/SCS	-88	-Infinity	-Infinity
Propagation Condition			AWGN		

Note 1: OCNG shall be used such that active cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 3: Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 4: SSB RP and Io levels have been derived from other parameters and are given for information purpose. These are not settable test parameters.

Table A.6.6.12.4.1-4: Cell-specific test parameters for RSTD measurement reporting delay during T2

Parameter		Unit	Cell 1		Cell 2		Cell 3	
			Sub-test 1	Sub-test 2	Sub-test 1	Sub-test 2	Sub-test 1	Sub-test 2
NR RF Channel Number			1		1		1	
Correlation Matrix and Antenna Configuration			1x2 Low		1x2 Low		1x2 Low	
OCNG patterns defined in A.3.2.1			OP.1		OP.1		OP.1	
PRACH configuration			FR1 PRACH configuration 1		FR1 PRACH configuration 1		FR1 PRACH configuration 1	
N_{oc} Note 3	Config 1,2	dBm/SCS	-98		-98		-98	
	Config 3	dBm/SCS	-95		-95		-95	
PRS $\hat{E}_s/N_{oc}$	Config 1,2,3	dB	-6	-3	-13	5	-13	5
Io Note 4	Config 1,2	dBm/ 9.36MHz	-69.59	-69.59	-69.93	-67.9	-69.93	-67.9
	Config 3	dBm/ 38.16MHz	-63.72		-63.89		-63.89	
PRS $\hat{E}_s/I_{ot}$	Config 1,2,3	dB	-6	-3	-13	5	-13	5
PRS-RSRP Note 4	Config 1,2	dBm/SCS	-104	-101	-111	-93	-111	-93
	Config 3		-101	-91	-108	-90	-108	-90
SS-RSRP Note 4	Config 1,2	dBm/SCS	-88		-88		-88	
	Config 3		-85		-85		-85	
Propagation Condition			AWGN					

Note 1: OCNG shall be used such that active cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols other than those in the subframes with transmitted PRS.
Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 3: Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 4: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.6.12.4.2 Test Requirements

The RSTD measurement time fulfils the gapless RSTD measurement period requirements specified in Clause 9.9.2.7.

The UE shall perform and report the RSTD measurements for Cell 2 and Cell 3 with respect to the reference cell in the DL-TDOA assistance data, Cell 1, within the time duration specified in section 9.9.2.7 starting from the beginning of time interval T2.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported RSTD measurement for each correct event shall be within the RSTD reporting range specified in Clause 10.1.23.3, i.e., between RSTD_0000000 and RSTD1970049.

A.6.6.12.5 NR RSTD measurement reporting delay test case for single positioning frequency layer in FR1 SA in RRC_CONNECTED state with Rx TEG

A.6.6.12.5.1 Test Purpose and Environment

The purpose of the test is to verify that the RSTD measurement meets the Rx TEG based measurement period requirements specified in Clause 9.9.2.5 in an environment with AWGN propagation conditions in FR1 in standalone scenario when single positioning frequency layer is configured.

The supported test configurations are specified in Table A.6.6.12.5.1-1.

Table A.6.6.12.5.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

In the test there are three synchronous cells: Cell 1, Cell 2 and Cell 3. Cell 1 is the reference as well as the PCell. Cell 2 and Cell 3 are the neighbour cells. All 3 cells are on the same RF channel in FR1.

The test consists of two consecutive time intervals, with duration of T1 and T2. During time duration T1, the UE shall not have any timing information of Cell 2 and Cell 3. All three cells transmit PRS during T2.

Note: The information on when PRS is muted is conveyed to the UE using PRS muting information.

The *NR-DL-TDOA-ProvideAssistanceData* and *nr-DL-TDOA-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where ΔT = 50 ms is the maximum processing time of the *DL-TDOA assistance* data and location information request.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance containing the PRS resources.

The UE is configured with measurement gap pattern ID # 24 or #0 before T2.

The test applies to the UE supporting Rx TEG indicated via *NR-UE-TEG-Capability* and is requested to provide the Rx TEG in the test via *nr-UE-RxTEG-Request-r17* in *NR-TDOA-RequestLocationInformation*. In the location request *measureSameDL-PRS-ResourceWithDifferentRxTEGs-r17* is set to n0. The UE shall perform and optionally report the Rx TEG based RSTD measurements.

The general test parameters are listed in Table A.6.6.12.5.1-2, and cell specific test parameters are listed in Table A.6.6.12.5.1-3.

Table A.6.6.12.5.1-2: General test parameters for RSTD measurement reporting delay

Parameter		Unit	Value	Comment
Reference cell			Cell 1	Reference cell is the cell in the DL-TDOA assistance data with respect to which the RSTD measurement is defined, as specified in TS 38.215 [4] and TS 37.355 [34]. The reference cell is the PCell in this test case.
Neighbor cells			Cell 2 and Cell 3	Cell 2 and Cell 3 appear at the first and second places in the neighbour cell list in the DL-TDOA assistance data.
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52	
	Config 2		10: $N_{RB,c}$ = 52	
	Config 3		40: $N_{RB,c}$ = 106	
SSB configuration	Config 1		SSB.1 FR1	
	Config 2		SSB.1 FR1	
	Config 3		SSB.2 FR1	
SMTC configuration	Config 1		SMTC.2	
	Config 2		SMTC.1	
	Config 3		SMTC.1	
PDSCH RMC configuration	Config 1		SR.1.1 FDD	
	Config 2		SR.1.1 TDD	
	Config 3		SR.2.1 TDD	
RMSI CORESET RMC configuration	Config 1		CR.1.1 FDD	As specified in clause A.3.1.2.1
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
Dedicated CORESET RMC configuration	Config 1		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
Initial BWP configuration	Config 1,2,3		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration	Config 1,2,3		DLBWP.1.1	
Active UL BWP configuration	Config 1,2,3		ULBWP.1.1	
PRS Configuration	Config 1		PRS.1.4 FR1	As specified in clause A.3.31
	Config 2		PRS.1.4 FR1	
	Config 3		PRS.2.4 FR1	

Physical cell ID PCI		(PCI of Cell 1 – PCI of Cell 2)mod6=0 and (PCI of Cell 1 – PCI of Cell 3)mod6=0	The cell PCIs are selected such that the relative shifts of PRS patterns among cells are as given by the test parameters
CP length		Normal	
DRX		OFF	
Measurement gap		GP#24 or GP#0	GP#24 is configured if UE supports MG#24, otherwise GP#0 is configured
Radio frame receive time offset between the cells at the UE antenna connector	µs	Cell 2 to Cell 1: 0 Cell 3 to Cell 1: 3	PRS are transmitted from synchronous cells
Expected RSTD	µs	Cell 2: 3 Cell 3: 3 Other neighbour cells: randomly between -3 and 3	The expected RSTD is what is expected at the receiver. The corresponding parameter in the DL-TDOA assistance data specified in TS 37.355 [34] is the expectedRSTD indicator
Expected RSTD uncertainty for all neighbour cells	µs	5	The corresponding parameter in the DL-TDOA assistance ta specified in TS 37.355 [34] is the expectedRSTD-Uncertainty index
Number of cells provided in DL-TDOA assistance data		16	Including the reference cell
PRS muting info		Cell 1: '10' Cell 2: '01' Cell 3: '10'	Correponds to prs-MutingInfo defined in TS 37.355 [34]
PRS resource RE offset		Cell 1: 0 Cell 2: 0 Cell 3: 1	Cell 1 and Cell 3 are configured with different resource offsets
T1	s	3	The length of the time interval from the beginning of each test
T2	s	[1.28*$k_{multiTEG}$]Note 1	The length of the time interval that follows immediately after time interval T1

Note 1:

- $k_{multiTEG}=\left\lceil \frac{N_{TEG}}{k_{TEG,simul}} \right\rceil$ if UE is capable of receiving the same DL PRS resource from the same TRP simultaneously from multiple Rx TEGs, where N_{TEG} is the maximum number of Rx TEGs with which UE can support to measure the same PRS resource, and $k_{TEG,simul}$ is the number of Rx TEGs UE can measure simultaneously which is reported via *measureSameDL-PRS-ResourceWithDifferentRxTEGsSimul*.

Table A.6.6.12.5.1-3: Cell-specific test parameters for RSTD measurement reporting delay during T1

Parameter		Unit	Cell 1	Cell 2	Cell 3
NR RF Channel Number			1	1	1
Positiong frequency layer			1	1	1
Correlation Matrix and Antenna Configuration			1x2 Low	1x2 Low	1x2 Low
OCNG patterns defined in A.3.2.1			OP.1	N/A	N/A
N_{oc} Note 3	Config 1	dBm/SCS	-98		
	Config 2	dBm/SCS	-98		

	Config 3	dBm/SCS	-95		
PRS $\hat{E}_s/N_{oc}$		dB	-Infinity	-Infinity	-Infinity
SSB $\hat{E}_s/N_{oc}$		dB	10	-Infinity	-Infinity
Io Note 4	Config 1	dBm/ 9.36MHz	-68.63	-70.05	-70.05
	Config 2	dBm/ 9.36MHz	-68.63	-70.05	-70.05
	Config 3	dBm/ 38.16MHz	-63.20	-63.96	-63.96
SSB RP Note4	Config 1	dBm/SCS	-88	-Infinity	-Infinity
	Config 2	dBm/SCS	-88	-Infinity	-Infinity
	Config 3	dBm/SCS	-88	-Infinity	-Infinity
Propagation Condition			AWGN		

Note 1: OCNG shall be used such that active cell (Cell 1) is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 3: Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 4: SSB RP and Io levels have been derived from other parameters and are given for information purpose. These are not settable test parameters.

Table A.6.6.12.5.1-4: Cell-specific test parameters for RSTD measurement reporting delay during T2

Parameter		Unit	Cell 1	Cell 2	Cell 3
			T2	T2	T2
NR RF Channel Number			1	1	1
Correlation Matrix and Antenna Configuration			1x2 Low	1x2 Low	1x2 Low
OCNG patterns defined in A.3.2.1			OP.1	OP.1	OP.1
PRACH configuration			FR1 PRACH configuration 1	FR1 PRACH configuration 1	FR1 PRACH configuration 1
N_{oc} Note 3	Config 1	dBm/SCS	-98	-98	-98
	Config 2	dBm/SCS	-98	-98	-98
	Config 3	dBm/SCS	-95	-95	-95
PRS $\hat{E}_s/N_{oc}$	Config 1	dB	-5.45	-11.67	-11.67
	Config 2	dB	-5.45	-11.67	-11.67
	Config 3	dB	-5.45	-11.67	-11.67
Io Note 4	Config 1	dBm/ 9.36MHz	-69.59	-69.93	-69.93
	Config 2	dBm/ 96.48MHz	-69.59	-69.93	-69.93
	Config 3	dBm/ 38.16MHz	-63.72	-63.89	-63.89

PRS $\hat{E}_s/I_{ot}$	dB	-6	-13	-13
Propagation Condition		AWGN		
Note 1: OCNG shall be used such that active cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols other than those in the subframes with transmitted PRS. Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 3: Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				

A.6.6.12.5.2 Test Requirements

The RSTD measurement time fulfils the Rx TEG based RSTD measurement period requirements specified in Clause 9.9.2.5. The UE shall perform and report the Rx TEG based RSTD measurements for Cell 2 and Cell 3 with respect to the reference cell in the DL-TDOA assistance data, Cell 1, within the time duration specified in section 9.9.2.5 starting from the beginning of time interval T2.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported RSTD measurement for each correct event shall be within the RSTD reporting range specified in Clause 10.1.23.3, i.e., between RSTD_0000000 and RSTD1970049.

A.6.6.13 PRS-RSRP measurements

A.6.6.13.1 PRS-RSRP reporting delay test case for single positioning frequency layer

A.6.6.13.1.1 Test purpose and Environment

The purpose of the test is to verify that the PRS-RSRP measurement meets the delay requirements specified in clause 9.9.3.5 in an environment with AWGN propagation conditions.

The supported test configurations are specified in Table A.6.6.13.1.1-1.

Table A.6.6.13.1.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

In the test there are two synchronous cells: Cell 1 and Cell 2. Cell 1 is the reference as well as the PCell. Cell 2 is a neighbour cell. Both cells are on the same NR RF channel in FR1. The test consists of two consecutive time intervals, with duration of T1 and T2. Both cells transmit PRS during T2.

The *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message as defined in TS 37.355 shall be provided to the UE during T1. The last slot containing the two messages for the assistance data and location information request is denoted as #n.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance containing the PRS resources that is ΔT after slot #n, where ΔT = 50 ms is the maximum processing time of the assistance data and location information request.

The general test parameters are listed in Table A.6.6.13.1.1-2, and cell specific test parameters are listed in Table A.6.6.13.1.1-3.

Table A.6.6.13.1.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Reference cell		1, 2, 3	Cell 1	Cell 1 is the PCell and the DL-AoD reference cell in the positioning assistance data.
Neighbour cell		1, 2, 3	Cell 2	Cell 2 is a neighbour cell in the positioning assistance data.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2	
$BW_{channel}$	MHz	1	10: $N_{RB,c}$ = 52	
		2	10: $N_{RB,c}$ = 52	
		3	40: $N_{RB,c}$ = 106	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
Measurement gap		1, 2, 3	GP#24 or GP#0 Note 1	
CP length		1, 2, 3	Normal	
DRX		1, 2, 3	NA	OFF
Time offset between serving and neighbour cells	µs	1, 2, 3	3	Synchronous cells
Expected RSTD	µs	1, 2, 3	3	
Expected RSTD uncertainty	µs	1, 2, 3	5	
T1	s	1, 2, 3	2	
T2	s	1, 2, 3	5	
NOTE 1: GP#24 is configured if UE supports MG#24, otherwise GP#0 is configured.				

Table A.6.6.13.1.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD			
		3	CR.2.1 TDD			
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD			
		3	CCR.2.1 TDD			
OCNG Patterns		1, 2, 3	OP.1		OP.1	
EPRE ratio of PSS to SSS	dB	1, 2, 3	0		0	
EPRE ratio of PBCH DMRS to SSS						

EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS Note 1						
EPRE ratio of OCNG to OCNG DMRS Note 1						
EPRE ratio of PRS to SSS						
TRS Configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD			
		3	TRS.1.2 TDD			
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		N/A	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1		N/A	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1		N/A	
PRS configuration		1	PRS.1.4 FR1		PRS.1.4 FR1	
		2	PRS.1.4 FR1		PRS.1.4 FR1	
		3	PRS.2.4 FR1		PRS.2.4 FR1	
PRS muting info		1, 2, 3	‘10’		‘01’	
N_{oc} Note 2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1	-98			
		2				
		3				
PRS $\hat{E}_s / I_{ot}$	dB	1	-Infinity	-3.41	-Infinity	-11.76
		2				
		3				
PRS $\hat{E}_s / N_{oc}$	dB	1	-Infinity	-3	-Infinity	-10
		2				
		3				
PRP Note 3	dBm/SCS kHz	1	-Infinity	-101	-Infinity	-108
		2	-Infinity	-101	-Infinity	-108
		3	-Infinity	-98	-Infinity	-105
Io	dBm/9.36 MHz	1	N/A	-68	N/A	-68
	dBm/9.36 MHz	2		-68		-68
	dBm/38.16 MHz	3		-61.91		-61.91
Propagation Condition		1, 2, 3	AWGN			

Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	PRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.6.13.1.2 Test Requirements

The UE shall perform and report the PRS-RSRP measurements for Cell 1 and Cell 2, within the time limit specified in clause 9.9.3.5, starting from the beginning of time interval T2.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.6.13.2 PRS-RSRP reporting delay test case for dual positioning frequency layer

A.6.6.13.2.1 Test purpose and Environment

The purpose of the test is to verify that the PRS-RSRP measurement meets the delay requirements specified in clause 9.9.3.5 in an environment with AWGN propagation conditions.

The supported test configurations are specified in Table A.6.6.13.2.1-1.

Table A.6.6.13.2.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

In the test there are two synchronous cells: Cell 1 and Cell 2. Cell 1 is the reference as well as the PCell on NR RF channel #1 in FR1. Cell 2 is a neighbour cell on a different NR RF channel #2 in FR1. The test consists of two consecutive time intervals, with duration of T1 and T2. Both cells transmit PRS during T2.

The *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message as defined in TS 37.355 shall be provided to the UE during T1. The last slot containing the two messages for the assistance data and location information request is denoted as #n.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance containing the PRS resources that is ΔT after slot #n, where ΔT = 50 ms is the maximum processing time of the assistance data and location information request.

The general test parameters are listed in Table A.6.6.13.2.1-2, and cell specific test parameters are listed in Table A.6.6.13.2.1-3.

Table A.6.6.13.2.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Reference cell		1, 2, 3	Cell 1	Cell 1 is the PCell and the DL-AoD reference cell in the positioning assistance data.

Neighbour cell		1, 2, 3	Cell 2	Cell 2 is a neighbour cell in the positioning assistance data.
RF Channel Number		1, 2, 3	1: Cell 1 2: Cell 2	Cell 1 and Cell 2 are on differnet positioning frequency layers
$BW_{channel}$	MHz	1	10: $N_{RB,c}$ = 52	
		2	10: $N_{RB,c}$ = 52	
		3	40: $N_{RB,c}$ = 106	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
Measurement gap		1, 2, 3	GP#24 or GP#0 Note 1	
CP length		1, 2, 3	Normal	
DRX		1, 2, 3	NA	OFF
Time offset between serving and neighbour cells	µs	1, 2, 3	3	Synchronous cells
Expected RSTD	µs	1, 2, 3	3	
Expected RSTD uncertainty	µs	1, 2, 3	5	
T1	s	1, 2, 3	2	
T2	s	1, 2, 3	10	
NOTE 1: GP#24 is configured if UE supports MG#24, otherwise GP#0 is configured.				

Table A.6.6.13.2.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD			
		3	CR.2.1 TDD			
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD			
		3	CCR.2.1 TDD			
OCNG Patterns		1, 2, 3	OP.1		OP.1	
EPRE ratio of PSS to SSS	dB	1, 2, 3	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						

EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS Note 1						
EPRE ratio of OCNG to OCNG DMRS Note 1						
EPRE ratio of PRS to SSS						
TRS Configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD			
		3	TRS.1.2 TDD			
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		N/A	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1		N/A	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1		N/A	
PRS configuration		1	PRS.1.4 FR1		PRS.1.4 FR1	
		2	PRS.1.4 FR1		PRS.1.4 FR1	
		3	PRS.2.4 FR1		PRS.2.4 FR1	
PRS muting info		1, 2, 3	'10'		'01'	
N_{oc} Note 2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1	-98			
		2				
		3				
PRS $\hat{E}_s/I_{ot}$	dB	1	-Infinity	-3	-Infinity	-10
		2				
		3				
PRS $\hat{E}_s/N_{oc}$	dB	1	-Infinity	-3	-Infinity	-10
		2				
		3				
PRP Note 3	dBm/SCS kHz	1	-Infinity	-101	-Infinity	-108
		2	-Infinity	-101	-Infinity	-108
		3	-Infinity	-98	-Infinity	-105
Io	dBm/9.36 MHz	1	N/A	-68.28	N/A	-69.63
	dBm/9.36 MHz	2		-68.28		-69.63
	dBm/38.16 MHz	3		-62.19		-62.19
Propagation Condition		1, 2, 3	AWGN			

Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	PRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.6.13.2.2 Test Requirements

The UE shall perform and report the PRS-RSRP measurements for Cell 1 and Cell 2, within the time limit specified in clause 9.9.3.5, starting from the beginning of time interval T2.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.6.13.3 PRS-RSRP reporting delay test case for reduced number of samples

A.6.6.13.3.1 Test purpose and Environment

The purpose of the test is to verify that the PRS-RSRP measurement meets the delay requirements for reduced number of samples specified in clause 9.9.3.5 in an environment with AWGN propagation conditions.

The supported test configurations are specified in Table A.6.6.13.3.1-1.

Table A.6.6.13.3.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

In the test there are two synchronous cells: Cell 1 and Cell 2. Cell 1 is the reference as well as the PCell. Cell 2 is a neighbour cell. Both cells are on the same NR RF channel in FR1. The test consists of two consecutive time intervals, with duration of T1 and T2. Both cells transmit PRS during T2.

The *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message as defined in TS 37.355 shall be provided to the UE during T1. The last slot containing the two messages for the assistance data and location information request is denoted as #n.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance containing the PRS resources that is ΔT after slot #n, where ΔT = 50 ms is the maximum processing time of the assistance data and location information request.

The general test parameters are listed in Table A.6.6.13.3.1-2, and cell specific test parameters are listed in Table A.6.6.13.3.1-3.

Table A.6.6.13.3.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Reference cell		1, 2, 3	Cell 1	Cell 1 is the PCell and the DL-AoD reference cell in the positioning assistance data.

Neighbour cell		1, 2, 3	Cell 2	Cell 2 is a neighbour cell in the positioning assistance data.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2	
$BW_{channel}$	MHz	1	10: $N_{RB,c}$ = 52	
		2	10: $N_{RB,c}$ = 52	
		3	40: $N_{RB,c}$ = 106	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
Measurement gap		1, 2, 3	GP#24 or GP#0 Note 1	
CP length		1, 2, 3	Normal	
DRX		1, 2, 3	NA	OFF
Time offset between serving and neighbour cells	µs	1, 2, 3	3	Synchronous cells
Expected RSTD	µs	1, 2, 3	3	
Expected RSTD uncertainty	µs	1, 2, 3	5	
T1	s	1, 2, 3	2	
T2	s	1, 2, 3	5	
NOTE 1: GP#24 is configured if UE supports MG#24, otherwise GP#0 is configured.				

Table A.6.6.13.3.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD			
		3	CR.2.1 TDD			
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD			
		3	CCR.2.1 TDD			
OCNG Patterns		1, 2, 3	OP.1		OP.1	
EPRE ratio of PSS to SSS	dB	1, 2, 3	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS Note 1						
EPRE ratio of OCNG to OCNG DMRS Note 1						

EPRE ratio of PRS to SSS						
TRS Configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD			
		3	TRS.1.2 TDD			
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		N/A	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1		N/A	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1		N/A	
PRS configuration		1	PRS.1.1 FR1		PRS.1.1 FR1	
		2	PRS.1.1 FR1		PRS.1.1 FR1	
		3	PRS.2.1 FR1		PRS.2.1 FR1	
PRS BW		1	48 PRBs		48 PRBs	
		2	48 PRBs		48 PRBs	
		3	48 PRBs		48 PRBs	
PRS muting info		1, 2, 3	'10'		'01'	
N_{oc} Note 2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1	-98			
		2				
		3				
PRS $\hat{E}_s / I_{ot}$	dB	1	-Infinity	-1.76	-Infinity	-6.01
		2				
		3				
PRS $\hat{E}_s / N_{oc}$	dB	1	-Infinity	0	-Infinity	-3
		2				
		3				
PRP Note 3	dBm/SCS kHz	1	-Infinity	-98	-Infinity	-101
		2	-Infinity	-98	-Infinity	-101
		3	-Infinity	-95	-Infinity	-98
Io	dBm/9.36 MHz	1	N/A	-66.07	N/A	-66.07
	dBm/9.36 MHz	2		-66.07		-66.07
	dBm/38.16 MHz	3		-59.97		-59.97
Propagation Condition		1, 2, 3	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: PRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

A.6.6.13.3.2 Test Requirements

The UE shall perform and report the PRS-RSRP measurements for Cell 1 and Cell 2, within the time limit for reduced number of samples specified in clause 9.9.3.5, starting from the beginning of time interval T2.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.6.13.4 PRS-RSRP reporting delay test case for single positioning frequency layer outside MG

A.6.6.13.4.1 Test purpose and Environment

The purpose of the test is to verify that the PRS-RSRP measurement outside MG meets the delay requirements specified in clause 9.9.3.6 in an environment with AWGN propagation conditions. There are two sub-tests in the test, sub-test 1 is to verify the delay requirements with Nsample=1, and sub-test 2 is to verify the delay requirements with Nsample=4.

The supported test configurations are specified in Table A.6.6.13.4.1-1.

Table A.6.6.13.4.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

In the test there are two synchronous cells: Cell 1 and Cell 2. Cell 1 is the reference as well as the PCell. Cell 2 is a neighbour cell. Both cells are on the same NR RF channel in FR1. The test consists of two consecutive time intervals, with duration of T1 and T2. Both cells transmit PRS during T2.The *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message as defined in TS 37.355 shall be provided to the UE during T1. The last slot containing the two messages for the assistance data and location information request is denoted as #n. In sub-test 1, *requestedDL-PRS-ProcessingSamples* shall be included in the location information request and set to ‘m1’.

During T1, a PPW shall be configured for the PCell and be activated via DL MAC CE. The last PDSCH containing the MAC CE shall be transmitted before slot #n.

The beginning of the time interval T2 shall be aligned with the beginning of the first PPW instance containing the PRS resources that is ΔT after slot #n, where ΔT = 50 ms is the maximum processing time of the assistance data and location information request.

The general test parameters are listed in Table A.6.6.13.4.1-2, and cell specific test parameters during T2 are listed in Table A.6.6.13.4.1-3.

Table A.6.6.13.4.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Reference cell		1, 2, 3	Cell 1	Cell 1 is the PCell and the DL-AoD reference cell in the positioning assistance data.
Neighbour cell		1, 2, 3	Cell 2	Cell 2 is a neighbour cell in the positioning assistance data.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2	
$BW_{channel}$	MHz	1	10: $N_{RB,c}$ = 52	
		2	10: $N_{RB,c}$ = 52	
		3	40: $N_{RB,c}$ = 106	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	

PPW configuration		1	TBD	
		2	TBD	
		3	TBD	
CP length		1, 2, 3	Normal	
DRX		1, 2, 3	NA	OFF
Time offset between serving and neighbour cells	µs	1	3	
		2	3	
		3	3 or 2.34 Note 1	
Expected RSTD	µs	1, 2, 3	0	
Expected RSTD uncertainty	µs	1, 2, 3	Same as time offset between serving and neighbour cells	
T1	s	1, 2, 3	2	
T2	s	1, 2, 3	[5]	
NOTE 1: If UE indicates support of CP length for the receive time difference threshold, the time offset is set to 2.34us, otherwise 3us.				

Table A.6.6.13.4.1-3: Cell specific test parameters during T2

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			Sub-test 1	Sub-test 2	Sub-test 1	Sub-test 2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD			
		3	CR.2.1 TDD			
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD			
		3	CCR.2.1 TDD			
OCNG Patterns		1, 2, 3	OP.1		OP.1	
TRS Configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD			
		3	TRS.1.2 TDD			
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		N/A	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1		N/A	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1		N/A	
PRS configuration		1	PRS.1.3 FR1		PRS.1.3 FR1	
		2	PRS.1.3 FR1		PRS.1.3 FR1	
		3	PRS.2.3 FR1		PRS.2.3 FR1	
PRS muting info		1, 2, 3	'10'		'01'	
N_{oc} Note 2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1	-98			
		2				
		3				
PRS $\hat{E}_s/I_{ot}$	dB	1	-3	-3	-6	-10
		2				
		3				
PRS $\hat{E}_s/N_{oc}$	dB	1	-3	-3	-6	-10
		2				

		3				
PRS-RSRP Note 3	dBm/SCS kHz	1	-101	-101	-104	-108
		2	-101	-101	-104	-108
		3	-98	-98	-101	-105
SS-RSRP Note 3	dBm/SCS kHz	1	-101	-101	-104	-108
		2	-101	-101	-104	-108
		3	-98	-98	-101	-105
Io	dBm/9.36 MHz	1	-68.28	-68.28	-69.07	-69.63
	dBm/9.36 MHz	2	-68.28	-68.28	-69.07	-69.63
	dBm/38.16 MHz	3	-62.19	-62.19	-62.98	-63.54
Propagation Condition		1, 2, 3	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP/PRS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.6.13.4.2 Test Requirements

The UE shall perform and report the PRS-RSRP measurements for Cell 1 and Cell 2, within the time limit specified in clause 9.9.3.6, starting from the beginning of time interval T2, with Nsample=1 for sub-test 1 and Nsample=4 for sub-test 2.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.6.14 UE Rx-Tx time difference measurements

A.6.6.14.1 UE Rx-Tx time difference measurement for single positioning frequency layer in FR1 SA

A.6.6.14.1.1 Test purpose and environment

The purpose of the test is to verify that the UE Rx-Tx measurement meets the requirements specified in clause 9.9.4.5 in AWGN propagation condition in FR1 in standalone scenario when single positioning frequency layer is configured.

The supported test configurations in listed in Table A.6.6.14.1.1-1.

Table A.6.6.14.1.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are two cells in the test: PCell (Cell 1) and a neighbour cell (Cell 2). Both cells are on the same RF channel in FR1.

The test consists of two consecutive time intervals, with duration of T1 and T2. Cell 1 and Cell 2 mute PRS transmission during T1 and transmit PRS during T2.

The *NR-Multi-RTT-ProvideAssistanceData* and *nr-Multi-RTT-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where ΔT = 50 ms is the maximum processing time of the multi-RTT assistance data and location information request.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance containing the PRS resources.

The UE is configured with measurement gap pattern ID #0 or ID #24 before T2.

The UE is configured to transmit positioning SRS during T2.

The general test parameters and cell specific test parameters are as given in Table A.6.6.14.1.1-2 and Table A.6.6.14.1.1-3 respectively.

Table A.6.6.14.1.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3	Cell 1	Cell 1 is the PCell in *NR-Multi-RTT-ProvideAssistanceData* [34].
Neighbour cell		1, 2, 3	Cell 2	Cell 2 is a neighbour cell in *NR-Multi-RTT-ProvideAssistanceData* [34].
RF Channel Number		1, 2, 3	1	For both Cell 1 and Cell 2
$BW_{channel}$	MHz	1	10: $N_{RB,c}$ = 52	
		2	10: $N_{RB,c}$ = 52	
		3	40: $N_{RB,c}$ = 106	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
Measurement gap		1, 2, 3	GP#24 or GP#0 Note 1	
CP length		1, 2, 3	Normal	
DRX		1, 2, 3	OFF	
Time offset between serving and neighbour cells	μs	1, 2, 3	3	Synchronous cells
T1	s	1, 2, 3	5	
T2	s	1, 2, 3	10	
Note 1: GP#24 is configured if UE supports MG#24, otherwise GP#0 is configured.				

Table A.6.6.14.1.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD			
		3	CR.2.1 TDD			
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD			
		3	CCR.2.1 TDD			

OCNG Patterns		1, 2, 3	OP.1		OP.1	
EPRE ratio of PSS to SSS	dB	1, 2, 3	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS Note 1						
EPRE ratio of OCNG to OCNG DMRS Note 1						
EPRE ratio of PRS to SSS						
TRS Configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD			
		3	TRS.1.2 TDD			
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		N/A	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1		N/A	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1		N/A	
PRS configuration		1	PRS.1.2 FR1		PRS.1.2 FR1	
		2	PRS.1.2 FR1		PRS.1.2 FR1	
		3	PRS.2.2 FR1		PRS.2.2 FR1	
PRS muting info		1, 2, 3	‘10’		‘01’	
SRS configuration		1	POS-SRS.1		N/A	
		2	POS-SRS.1		N/A	
		3	POS-SRS.2		N/A	
N_{oc} Note 2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1	-98			
		2				
		3				
PRS $\hat{E}_s / I_{ot}$	dB	1	-Infinity	-2.41	-Infinity	-12.12
		2				
		3				
PRS $\hat{E}_s / N_{oc}$	dB	1	-Infinity	-2	-Infinity	-10
		2				
		3				
PRP Note 3	dBm/SCS kHz	1	-Infinity	-100	-Infinity	-108
		2	-Infinity	-100	-Infinity	-108
		3	-Infinity	-97	-Infinity	-105
Io	dBm/9.36 MHz	1	N/A	-67.67	N/A	-67.67
	dBm/9.36 MHz	2		-67.67		-67.67
	dBm/38.16 MHz	3		-61.57		-61.57
Propagation Condition		1, 2, 3	AWGN			

Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	PRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.6.6.14.1.1-4: Void

A.6.6.14.1.2 Test requirements

The UE Rx-Tx time difference measurement time fulfils the requirements specified in clause 9.9.4.5.

The UE shall perform and report the UE Rx-Tx time difference measurements for Cell 1 and Cell 2 within the specified UE Rx-Tx time difference measurement time starting from the beginning of time interval T2.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported UE Rx-Tx measurement for each correct event shall be within the UE Rx-Tx reporting range specified in clause 10.1.25.3.1.

A.6.6.14.2 UE Rx-Tx time difference measurement for dual positioning frequency layers in FR1 SA

A.6.6.14.2.1 Test purpose and environment

The purpose of the test is to verify that the UE Rx-Tx measurement meets the requirements specified in clause 9.9.4.5 in AWGN propagation condition in FR1 in standalone scenario when dual positioning frequency layers are configured.

The supported test configurations in listed in Table A.6.6.9.2.1-1.

Table A.6.6.14.2.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are two cells in the test: PCell (Cell 1) and a neighbour cell (Cell 2). Cell 1 and Cell2 are on different RF channels in FR1.

The test consists of two consecutive time intervals, with duration of T1 and T2. Cell 1 and Cell 2 mute PRS transmission during T1 and transmit PRS during T2.

The *NR-Multi-RTT-ProvideAssistanceData* and *nr-Multi-RTT-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where ΔT = 50 ms is the maximum processing time of the multi-RTT assistance data and location information request.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance containing the PRS resources.

The UE is configured with measurement gap pattern ID #0 or ID #24 before T2.

The UE is configured to transmit positioning SRS during T2.

The general test parameters and cell specific test parameters are as given in Table A.6.6.14.2.1-2 and Table A.6.6.14.2.1-3 respectively.

Table A.6.6.14.2.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3	Cell 1	Cell 1 is the PCell in *NR-Multi-RTT-ProvideAssistanceData* [34].
Neighbour cell		1, 2, 3	Cell 2	Cell 2 is a neighbour cell in *NR-Multi-RTT-ProvideAssistanceData* [34].
RF Channel Number		1, 2, 3	1	For Cell 1
RF Channel Number		1, 2, 3	2	For Cell 2
$BW_{channel}$	MHz	1	10: $N_{RB,c}$ = 52	
		2	10: $N_{RB,c}$ = 52	
		3	40: $N_{RB,c}$ = 106	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
Measurement gap		1, 2, 3	GP#24 or GP#0 Note 1	
CP length		1, 2, 3	Normal	
DRX		1, 2, 3	OFF	
Time offset between serving and neighbour cells	µs	1, 2, 3	3	Synchronous cells
T1	s	1, 2, 3	5	
T2	s	1, 2, 3	10	
Note 1: GP#24 is configured if UE supports MG#24, otherwise GP#0 is configured.				

Table A.6.6.14.2.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD			
		3	CR.2.1 TDD			
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD			
		3	CCR.2.1 TDD			
OCNG Patterns		1, 2, 3	OP.1		OP.1	
EPRE ratio of PSS to SSS	dB	1, 2, 3	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						

EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS Note 1						
EPRE ratio of OCNG to OCNG DMRS Note 1						
EPRE ratio of PRS to SSS						
TRS Configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD			
		3	TRS.1.2 TDD			
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		N/A	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1		N/A	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1		N/A	
PRS configuration		1	PRS.1.2 FR1		PRS.1.2 FR1	
		2	PRS.1.2 FR1		PRS.1.2 FR1	
		3	PRS.2.2 FR1		PRS.2.2 FR1	
PRS muting info		1, 2, 3	'10'		'01'	
SRS configuration		1	POS-SRS.1		N/A	
		2	POS-SRS.1		N/A	
		3	POS-SRS.2		N/A	
N_{oc} Note 2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1	-98			
		2				
		3				
PRS $\hat{E}_s / I_{ot}$	dB	1	-Infinity	-3	-Infinity	-13
		2				
		3				
PRS $\hat{E}_s / N_{oc}$	dB	1	-Infinity	-3	-Infinity	-13
		2				
		3				
PRP Note 3	dBm/SCS kHz	1	-Infinity	-101	-Infinity	-111
		2	-Infinity	-101	-Infinity	-111
		3	-Infinity	-98	-Infinity	-108
Io	dBm/9.36 MHz	1	N/A	-68.28	N/A	-69.84
	dBm/9.36 MHz	2		-68.28		-69.84
	dBm/38.16 MHz	3		-62.19		-63.74
Propagation Condition		1, 2, 3	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: PRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.6.6.14.2.1-4: Void

A.6.6.14.2.2 Test requirements

The UE Rx-Tx time difference measurement time fulfils the requirements specified in clause 9.9.4.5.

The UE shall perform and report the UE Rx-Tx time difference measurements for Cell 1 and Cell 2 within the specified UE Rx-Tx time difference measurement time starting from the beginning of time interval T2.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported UE Rx-Tx measurement for each correct event shall be within the UE Rx-Tx reporting range specified in clause 10.1.25.3.1.

A.6.6.14.3 UE Rx-Tx time difference measurement for single positioning frequency layer in FR1 SA with reduced sample number

A.6.6.14.3.1 Test purpose and environment

The purpose of the test is to verify that the UE Rx-Tx measurement meets the requirements specified in clause 9.9.4.5 with Nsample = 1 in AWGN propagation condition in FR1 in standalone scenario when single positioning frequency layer is configured.

The supported test configurations in listed in Table A.6.6.14.3.1-1.

Table A.6.6.14.3.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are two cells in the test: PCell (Cell 1) and a neighbour cell (Cell 2). All cells are on the same RF channel in FR1.

The test consists of two consecutive time intervals, with duration of T1 and T2. Cell 1 and Cell 2 mute PRS transmission during T1 and transmit PRS during T2.

The *NR-Multi-RTT-ProvideAssistanceData* and *nr-Multi-RTT-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. *requestedDL-PRS-ProcessingSamples* shall be included in the location information request and set to ‘m1’. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where ΔT = 50 ms is the maximum processing time of the multi-RTT assistance data and location information request.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance containing the PRS resources.

The UE is configured with measurement gap pattern ID #0 or ID #24 before T2.

The UE is configured to transmit SRS during T2.

The general test parameters and cell specific test parameters are as given in Table A.6.6.14.3.1-2 and Table A.6.6.14.3.1-3 respectively.

Table A.6.6.14.3.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3	Cell 1	Cell 1 is the PCell in *NR-Multi-RTT-ProvideAssistanceData* [34].
Neighbour cell		1, 2, 3	Cell 2	Cell 2 is a neighbour cell in *NR-Multi-RTT-ProvideAssistanceData* [34].
RF Channel Number		1, 2, 3	1	For both Cell 1 and Cell 2
$BW_{channel}$	MHz	1	10: $N_{RB,c}$ = 52	
		2	10: $N_{RB,c}$ = 52	
		3	40: $N_{RB,c}$ = 106	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
Measurement gap		1, 2, 3	GP#24 or GP#0 Note 1	
CP length		1, 2, 3	Normal	
DRX		1, 2, 3	OFF	
Time offset between serving and neighbour cells	µs	1, 2, 3	3	Synchronous cells
T1	s	1, 2, 3	5	
T2	s	1, 2, 3	10	
Note 1: GP#24 is configured if UE supports MG#24, otherwise GP#0 is configured.				

Table A.6.6.14.3.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD			
		3	CR.2.1 TDD			
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD			
		3	CCR.2.1 TDD			
OCNG Patterns		1, 2, 3	OP.1		OP.1	
TRS Configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD			
		3	TRS.1.2 TDD			
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		N/A	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1		N/A	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1		N/A	
PRS configuration		1	PRS.1.1 FR1		PRS.1.1 FR1	
		2	PRS.1.1 FR1		PRS.1.1 FR1	
		3	PRS.2.1 FR1		PRS.2.1 FR1	
PRS muting info		1, 2, 3	‘10’		‘01’	
SRS configuration		1	POS-SRS.1		N/A	

		2	POS-SRS.1		N/A	
		3	POS-SRS.2		N/A	
N_{oc} Note 2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1	-98			
		2				
		3				
PRS $\hat{E}_s/I_{ot}$	dB	1	-Infinity	-2	-Infinity	-6
		2				
		3				
PRS $\hat{E}_s/N_{oc}$	dB	1	-Infinity	-2	-Infinity	-6
		2				
		3				
PRS-RSRP Note 3	dBm/SCS kHz	1	-Infinity	-100	-Infinity	-104
		2	-Infinity	-100	-Infinity	-104
		3	-Infinity	-97	-Infinity	-101
SS-RSRP Note 3	dBm/SCS kHz	1	-100	-100	-104	-104
		2	-100	-100	-104	-104
		3	-97	-97	-101	-101
Io	dBm/9.36 MHz	1	N/A	-67.92	N/A	-69.63
	dBm/9.36 MHz	2		-67.92		-69.63
	dBm/38.16 MHz	3		-61.83		-63.54
Propagation Condition		1, 2, 3	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and PRS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.6.14.3.2 Test requirements

The UE Rx-Tx time difference measurement time fulfils the requirements specified in clause 9.9.4.5 with Nsample=1.

The UE shall perform and report the UE Rx-Tx time difference measurements for Cell 1 and Cell 2 within the specified UE Rx-Tx time difference measurement time starting from the beginning of time interval T2.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported UE Rx-Tx measurement for each correct event shall be within the UE Rx-Tx reporting range specified in clause 10.1.25.3.1.

A.6.6.14.4 UE Rx-Tx time difference measurement without gaps in FR1 SA

A.6.6.14.4.1 Test purpose and environment

The purpose of the test is to verify that the UE Rx-Tx measurement meets the requirements specified in clause 9.9.4.6 in AWGN propagation condition in FR1 in standalone scenario. There are two sub-tests in the test, sub-test 1 is to verify the delay requirements with Nsample=1, and sub-test 2 is to verify the delay requirements with Nsample=4.

The supported test configurations in listed in Table A.6.6.14.4.1-1.

Table A.6.6.14.4.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are two cells in the test: PCell (Cell 1) and a neighbour cell (Cell 2). All cells are on the same RF channel in FR1.

The test consists of two consecutive time intervals, with duration of T1 and T2. Cell 1 and Cell 2 mute PRS transmission during T1 and transmit PRS during T2.

The *NR-Multi-RTT-ProvideAssistanceData* and *nr-Multi-RTT-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where $\Delta T = 50$ ms is the maximum processing time of the multi-RTT assistance data and location information request.

The beginning of the time interval T2 shall be aligned with the beginning of PRS processing window containing the PRS resources.

The UE is configured with PRS processing window before T2.

The UE is configured to transmit SRS during T2.

The general test parameters and cell specific test parameters are as given in Table A.6.6.14.4.1-2 and Table A.6.6.14.4.1-3 respectively.

Table A.6.6.14.4.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3	Cell 1	Cell 1 is the PCell in *NR-Multi-RTT-ProvideAssistanceData* [34].
Neighbour cell		1, 2, 3	Cell 2	Cell 2 is a neighbour cell in *NR-Multi-RTT-ProvideAssistanceData* [34].
RF Channel Number		1, 2, 3	1	For both Cell 1 and Cell 2
$BW_{channel}$	MHz	1	10: $N_{RB,c} = 52$	
		2	10: $N_{RB,c} = 52$	
		3	40: $N_{RB,c} = 106$	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
PRS processing window		TBD	TBD	
CP length		1, 2, 3	Normal	
DRX		1, 2, 3	OFF	
Time offset between serving and neighbour cells	µs	1	3 Note1	
		2	3 Note1	
		3	3 or 2.34 Note1	
Expected RSTD	µs	1,2,3	0	

Expected RSTD uncertainty	µs	1,2,3	Same as time offset between serving and neighbour cells	
T1	s	1, 2, 3	5	
T2	s	1, 2, 3	10	
NOTE 1: The value is up to the UE capability. The possible UE capability value: (1/4 symbol, 1/2 symbol, CP length, half of slot). When the UE reported value is > 3us, the time offset between serving and neighbour cells is set to 3us; when the UE reported value is < 3us, the time offset between serving and neighbour cells is set to the UE reported value.				

Table A.6.6.14.4.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			Sub-test 1	Sub-test 2	Sub-tets 1	Sub-test 2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD			
		3	CR.2.1 TDD			
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD			
		3	CCR.2.1 TDD			
OCNG Patterns		1, 2, 3	OP.1		OP.1	
TRS Configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD			
		3	TRS.1.2 TDD			
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		N/A	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1		N/A	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1		N/A	
PRS configuration		1	PRS.1.1 FR1		PRS.1.1 FR1	
		2	PRS.1.1 FR1		PRS.1.1 FR1	
		3	PRS.2.1 FR1		PRS.2.1 FR1	
PRS BW			48 PRBs	24 PRBs	48 PRBs	24 PRBs
PRS muting info		1, 2, 3	‘10’		‘01’	
SRS configuration		1	POS-SRS.1		N/A	
		2	POS-SRS.1		N/A	
		3	POS-SRS.2		N/A	
N_{oc} Note 2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1	-98			
		2				
		3				
PRS $\hat{E}_s / I_{ot}$	dB	1	-3	-2.41	-6	-12.12
		2				
		3				
PRS $\hat{E}_s / N_{oc}$	dB	1	-1.44	-2	-3.65	-10
		2				
		3				
	dBm/SCS kHz	1	-99.44	-100	-101.65	-108

PRS-RSRP Note 3		2	-99.44	-100	-101.65	-108
		3	-96.44	-97	-98.65	-105
Io	dBm/9.36 MHz	1	-66.73	-67.67	-66.73	-67.67
	dBm/9.36 MHz	2	-66.73	-67.67	-66.73	-67.67
	dBm/38.16 MHz	3	-60.62	-61.57	-60.62	-61.57
Propagation Condition		1, 2, 3	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: PRS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.6.14.4.2 Test requirements

The UE Rx-Tx time difference measurement time fulfils the requirements specified in clause 9.9.4.6.

The UE shall perform and report the UE Rx-Tx time difference measurements for Cell 1 and Cell 2 within the specified UE Rx-Tx time difference measurement time starting from the beginning of time interval T2.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported UE Rx-Tx measurement for each correct event shall be within the UE Rx-Tx reporting range specified in clause 10.1.25.3.1.

A.6.6.14.5 UE Rx-Tx time difference measurement for single positioning frequency layer in FR1 SA with multiple RxTx TEGs

A.6.6.14.4.1 Test purpose and environment

The purpose of the test is to verify that the UE Rx-Tx measurement meets the requirements specified in clause 9.9.4.5 in AWGN propagation condition in FR1 in standalone scenario when single positioning frequency layer is configured, and when UE is requested to measure a PRS resource with multiple RxTx TEGs.

The supported test configurations in listed in Table A.6.6.14.4.1-1.

Table A.6.6.14.4.11: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are two cells in the test: PCell (Cell 1) and a neighbour cell (Cell 2). All cells are on the same RF channel in FR1.

The test consists of two consecutive time intervals, with duration of T1 and T2. Cell 1 and Cell 2 mute PRS transmission during T1 and transmit PRS during T2.

The *NR-Multi-RTT-ProvideAssistanceData* and *nr-Multi-RTT-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where ΔT = 50 ms is the maximum processing time of the multi-RTT assistance data and location information request. In *nr-Multi-RTT-RequestLocationInformation*, *measureSameDL-PRS-ResourceWithDifferentRxTEGs-r17* shall be set to 'n2'.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance containing the PRS resources.

The UE is configured with measurement gap pattern ID #0 or ID #24 before T2.

The UE is configured to transmit SRS during T2.

The general test parameters and cell specific test parameters are as given in Table A.6.6.14.4.1-2 and Table A.6.6.14.4.1-3 respectively.

Table A.6.6.14.4.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3	Cell 1	Cell 1 is the PCell in *NR-Multi-RTT-ProvideAssistanceData* [34].
Neighbour cell		1, 2, 3	Cell 2	Cell 2 is a neighbour cell in *NR-Multi-RTT-ProvideAssistanceData* [34].
RF Channel Number		1, 2, 3	1	For both Cell 1 and Cell 2
$BW_{channel}$	MHz	1	10: $N_{RB,c}$ = 52	
		2	10: $N_{RB,c}$ = 52	
		3	40: $N_{RB,c}$ = 106	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
Measurement gap		1, 2, 3	GP#24 or GP#0 Note 1	
CP length		1, 2, 3	Normal	
DRX		1, 2, 3	OFF	
Time offset between serving and neighbour cells	µs	1, 2, 3	3	Synchronous cells
T1	s	1, 2, 3	5	
T2	s	1, 2, 3	10	
Note 1: GP#24 is configured if UE supports MG#24, otherwise GP#0 is configured.				

Table A.6.6.14.4.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD			
		3	CR.2.1 TDD			
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD			
		3	CCR.2.1 TDD			
OCNG Patterns		1, 2, 3	OP.1		OP.1	
TRS Configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD			
		3	TRS.1.2 TDD			

Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		N/A	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1		N/A	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1		N/A	
PRS configuration		1	PRS.1.2 FR1		PRS.1.2 FR1	
		2	PRS.1.2 FR1		PRS.1.2 FR1	
		3	PRS.2.2 FR1		PRS.2.2 FR1	
PRS muting info		1, 2, 3	'10'		'01'	
SRS configuration		1	POS-SRS.1		N/A	
		2	POS-SRS.1		N/A	
		3	POS-SRS.2		N/A	
N_{oc} Note 2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1	-98			
		2				
		3				
PRS $\hat{E}_s / I_{ot}$	dB	1	-Infinity	-2.41	-Infinity	-12.12
		2				
		3				
PRS $\hat{E}_s / N_{oc}$	dB	1	-Infinity	-2	-Infinity	-10
		2				
		3				
PRS-RSRP Note 3	dBm/SCS kHz	1	-Infinity	-100	-Infinity	-108
		2	-Infinity	-100	-Infinity	-108
		3	-Infinity	-97	-Infinity	-105
Io	dBm/9.36 MHz	1	N/A	-67.67	N/A	-67.67
	dBm/9.36 MHz	2		-67.67		-67.67
	dBm/38.16 MHz	3		-61.57		-61.57
Propagation Condition		1, 2, 3	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: PRS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.6.14.4.2 Test requirements

The UE Rx-Tx time difference measurement time fulfils the requirements specified in clause 9.9.4.5, with $k_{multiTEG}$=2 if UE does not support or indicate value 'n1' for *measureSameDL-PRS-ResourceWithDifferentRxTEGsSimul*, and $k_{multiTEG}$=1 otherwise.

The UE shall perform and report the UE Rx-Tx time difference measurements for Cell 1 and Cell 2 within the specified UE Rx-Tx time difference measurement time starting from the beginning of time interval T2.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported UE Rx-Tx measurement for each correct event shall be within the UE Rx-Tx reporting range specified in clause 10.1.25.3.1.

A.6.6.15 Idle Mode measurements of inter-RAT DC candidate cells for early reporting

A.6.6.15.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly retains the detected cell status for the idle mode CA/DC measurement when UE transitions from RRC Connected mode to Idle mode, when the UE has entered Idle mode. Additionally, test that the UE performs the required measurements on the serving cell and the configured inter-RAT carrier for idle mode measurement reporting. This test will partly verify the Idle mode CA measurements in clause 4.4. In the test, connected mode DRX configuration is not configured in either PCell or PSCell.

Additionally, the purpose of this test is to verify that the SS-RSRP, SS-RSRQ, RSRP and RSRQ measurement accuracy is within the specified limits. This test will verify the accuracy requirements in Sections 10.1.2B and 10.1.7B for intra-frequency measurements and section 10.2.2 and 10.2.3 for the inter-RAT measurements for the supported test configurations in tables A.6.6.15.1-4 and A.6.6.15.1-5.

The supported test configurations are given in Table A.6.6.15.1-1. The test parameters are given in Tables A.6.6.15.1-2, A.6.6.15.1-3, A.6.6.15.1-4 and A.6.6.15.1-5 below. In the test there are two cells, cell 1, which is the PCell in connected, and serving cell in idle mode, on radio channel 1 in FR1, and cell 2, which is the PSCell in connected, and measured LTE inter-RAT cell in idle mode, on radio channel 2 in LTE.

For the purpose of testing absolute accuracy in idle mode in this set of test cases the cells in idle mode are on different carrier frequencies (NR FR1 and LTE). The absolute accuracy of RSRP and RSRQ inter-RAT measurements are tested by using the parameters in Table A.6.6.15.1-4 and Table A.6.6.15.1-5. In all test cases, Cell 1 is the serving and Cell 2 the target cell.

The test consists of 5 successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. During T1 cell 2, the PSCell, shall be configured.

Time duration T2 starts when UE has transmitted random access preamble on the PSCell. During T2, the UE is configured with idle mode CA measurements with the PSCell carrier as the target carrier. The connection is released 500 ms after T2 when the UE has sent random access preamble on the PSCell.

T3 starts when the connection is released. During the time periods T3 and T4 the UE is in Idle mode with the serving cell on the FR1 carrier. The UE is configured to perform inter-RAT idle mode CA/DC measurements on Cell 2 carrier. After the connection release and during T3, 1000 ms after T3 is started, the signal level of the inter-RAT carrier configured for idle mode CA/DC measurements is changed at which time T4 starts. T5 starts 65s after T4, when the UE is paged for connection setup and UE is requested by the network to report idle mode CA/DC measurements.

Table A.6.6.15.1-1: Supported test configurations for Idle Mode measurements of inter-RAT DC candidate cells for early reporting

Config	Description
1	FR1 FDD SSB SCS 15kHz BW 10MHz – LTE FDD 10MHz
2	FR1 FDD SSB SCS 15kHz BW 10MHz – LTE TDD 10MHz
3	FR1 TDD SSB SCS 30kHz BW 40MHz – LTE FDD 10MHz
4	FR1 TDD SSB SCS 30kHz BW 40MHz – LTE TDD 10MHz
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.6.6.15.1-2: General test parameters for Idle Mode measurements of inter-RAT DC candidate cells for early reporting

Parameter	Unit	Value	Comment

RF Channel Number		1, 2	Two radio channels are used for this test
Active PCell		Cell 1	PCell on RF channel number 1 in FR1
PSCell		Cell 2	PSCell on RF channel number 2 in LTE. Cell 2 is of higher priority.
DRX		OFF	For both PCell and PSCell once configured
PRACH configuration in Cell 2		PRACH_2CE	PRACH configuration as specified in Clause A.3.16 in TS 36.133
T331	s	300	
CSI reporting periodicity and offset configuration for Cell 2	ms	2	
T1	s	0.5	During this time the PCell is known and PSCell is configured.
T2	s	0.5	PSCell access.
T3 + T4	s	66	During this time the UE is configured to perform inter-RAT measurements in idle mode on the PSCell carrier.
T5	s	0.5	UE is paged and connection is setup. Network requests measurement report from the UE.

Table A.6.6.15.1-3: Cell specific test parameters for NR cell for Idle Mode measurements of inter-RAT DC candidate cells for early reporting

Parameter	Unit	Config	Test 1				
			Cell 1				
			T1	T2	T3	T4	T5
AoA setup		1,2,3,4	N/A				
Assumption for UE beams Note 5 R: Rough		1,2,3,4	N/A	N/A	R	R	N/A
Frequency Range		1,2,3,4	FR1				
Duplex mode		1, 2	FDD				
		3, 4	TDD				
TDD Confguration 1: TDDConf.1.1 2: TDDConf.2.1		1,2	-				
		3,4	1	1	2	2	1
$BW_{channel}$ 1: 10: $N_{RB,c}$ = 52 2: 40: $N_{RB,c}$ = 106	MHz	1, 2	1	1	-	-	1
		3, 4	2	2	-	-	2
Initial Downlink BWP configuration		1,2,3,4	DLBWP.0.1				
Initial Uplink BWP configuration		1,2,3,4	ULBWP.0.1				
Dedicated Downlink BWP configuration 1: DLBWP.1.1		1,2,3,4	1	1	-	-	1
Dedicated Uplink BWP configuration 1: ULBWP.1.1		1,2,3,4	1	1	-	-	1
PDSCH Reference Measurement Channel 1: SR.1.1 FDD 2: SR.2.1 TDD	FDD	1,2	1	1	1	1	1
	TDD	3,4	2	2	2	2	2
TRS configuration		1,2,3,4	-				
TCI state		1,2,3,4	-				
RMSI CORESET parameters	FDD	1,2	CR.1.1 FDD				
	TDD	3,4	CR.2.1 TDD				
Dedicated CORESET parameters	FDD	1,2	CCR.1.1 FDD				
	TDD	3,4	CCR.2.1 TDD				
OCNG Patterns Note1		1,2,3,4	OP.1 defined in A.3.2.1				
SSB configuration		1,2	1				

1: SSB.1 FR1 2: SSB.2 FR1		3,4	2				
SMTC configuration		1,2,3,4	SMTC.2				
Correlation Matrix and Antenna config		1,2,3,4	1x2 Low				
EPRE ratio of PSS to SSS	dB	1,2,3,4	0	0	-	-	0
EPRE ratio of PBCH DMRS to SSS			0	0	-	-	0
EPRE ratio of PBCH to PBCH DMRS			0	0	-	-	0
EPRE ratio of PDCCH DMRS to SSS			0	0	-	-	0
EPRE ratio of PDCCH to PDCCH DMRS			0	0	-	-	0
EPRE ratio of PDSCH DMRS to SSS			0	0	-	-	0
EPRE ratio of PDSCH to PDSCH			0	0	-	-	0
EPRE ratio of OCNG DMRS to SSS			0	0	-	-	0
N_{oc} Note2	dBm/ 15kHz	1,2	-98	-98	-98	-98	-98
		3,4					
N_{oc} Note2	dBm/SCS	1,2	-98	-98	-98	-98	-98
		3,4	-95	-95	-95	-95	-95
$\hat{E}_s/I_{ot}$	dB	1,2,3,4	5	5	5	5	5
$\hat{E}_s/N_{oc}$	dB	1,2,3,4	5	5	5	5	5
SS-RSRP Note3,4	dBm/SCS	1,2	-93	-93	-93	-93	-93
		3,4	-90	-90	-90	-90	-90
Io Note3,4	dBm/ 9.36 MHz	1,2	-63.85	-63.85	-63.85	-63.85	-63.85
	dBm/ 38.16 MHz	3,4	-57.76	-57.76	-57.76	-57.76	-57.76
Qrxlevmin	dBm/SCS	1, 2	-	-	-140		-
		3, 4	-	-	-137		-
Pcompensation	dB	1,2,3,4	-	-	0	0	-
$Qhyst_s$	dB	1,2,3,4	-	-	0	0	-
$Qoffset_{s,n}$	dB	1,2,3,4	-	-	0	0	-
Cell_selection_and_ reselection_quality_measurement		1,2,3,4	SS-RSRP				
Treselection	s	1,2,3,4	-		0		-
SnonintrasearchP	dB	1,2,3,4	-		Not Sent		-
SnonintrasearchQ	dB	1,2,3,4	-		Not Sent		-
$Thresh_{x,high}$	dB	1,2,3,4	-		48		-
$Thresh_{serving,low}$	dB	1,2,3,4	-		44		-
$Thresh_{x,low}$	dB	1,2,3,4	-		50		-
Propagation Condition	dB	1,2,3,4	-		AWGN		-

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SSB_RP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Table A.6.6.15.1-4: Cell specific test parameters for LTE cell for Idle Mode measurements of inter-RAT DC candidate cells for early reporting

Parameter	Unit	Config	Test 1				
			Cell 2				
			T1	T2	T3	T4	T5
Frequency Range		1,2,3,4	LTE				
Duplex mode		1, 3	FDD				
		2, 4	TDD				
$BW_{channel}$	MHz	1,2,3,4	10	10	-	-	10
Measurement bandwidth	n_{PRB}	1,2,3,4	-	-	22-27	22-27	-
PDSCH Reference Measurement Channel 1: R.1 FDD 2: R.1 TDD	FDD	1,3	1	1	-	-	1
	TDD	2,4	2	2	-	-	2
PDCCH/PCFICH/PHICH Reference measurement channel defined in A.3.1.2.1 and A.3.1.2.2 in 36.133 1: R.6 FDD 2: R.6 TDD		1,3	1	1	-	-	1
		2,4	2	2	-	-	2
OCNG Patterns defined in A.3.2.1.1 (OP.2 FDD) and A.3.2.1.2 (OP.2 TDD) in 36.133 1: OP.2 FDD 2: OP.2 TDD		1,3	1				
		2,4	2				
Correlation Matrix and Antenna config		1,2,3,4	1x2 Low				
PBCH_RA	dB	1,2,3,4	N/A	N/A	0	0	N/A
PBCH_RB			N/A	N/A	0	0	N/A
PSS_RA			N/A	N/A	0	0	N/A
SSS_RA			N/A	N/A	0	0	N/A
PCFICH_RB			N/A	N/A	0	0	N/A
PHICH_RA			N/A	N/A	0	0	N/A
PHICH_RB			N/A	N/A	0	0	N/A
PDCCH_RA			N/A	N/A	0	0	N/A
PDCCH_RB			N/A	N/A	0	0	N/A
PDSCH_RA			N/A	N/A	0	0	N/A
PDSCH_RB			N/A	N/A	0	0	N/A
OCNG_RA Note 1			N/A	N/A	0	0	N/A
OCNG_RB Note 1			N/A	N/A	0	0	N/A
N_{oc} Note2	dBm/ 15kHz	1,2	-98	-98	-98	-98	-98
		3,4					
$\hat{E}_s/I_{ot}$	dB	1,2,3,4	5	5	-3	8	5
$\hat{E}_s/N_{oc}$	dB	1,2,3,4	5	5	-3	8	5
SS-RSRP Note3,4	dBm/SCS	1,2,3,4	-93	-93	-101	-90	-93
Io Note3,4	dBm/ 9.36 MHz	1,2, 3, 4	-61.01	-61.01	-65.44	-58.57	-61.01
Qrxlevmin	dBm/SCS	1,2, 3, 4	-	-	-140		-
Pcompensation	dB	1,2,3,4	-	-	0	0	-
$Qhyst_s$	dB	1,2,3,4	-	-	0	0	-
$Qoffset_{s,n}$	dB	1,2,3,4	-	-	0	0	-
Cell_selection_and_ reselection_quality_measurement		1,2,3,4	RSRP and RSRQ				
Treselection	s	1,2,3,4	-		0		-
SnonintrasearchP	dB	1,2,3,4	-		Not Sent		-
SnonintrasearchQ	dB	1,2,3,4	-		Not Sent		-

$Thresh_{x, high}$	dB	1,2,3,4	-	48	-
$Thresh_{serving, low}$	dB	1,2,3,4	-	44	-
$Thresh_{x, low}$	dB	1,2,3,4	-	50	-
Propagation Condition	dB	1,2,3,4	-	AWGN	-

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SSB_RP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Table A.6.6.15.1-5: General idle mode test parameters for Idle Mode measurements of inter-RAT DC candidate cells for early reporting

Parameter	Unit	Test configuration	Value	Comment
Serving cell		1, 2, 3, 4	Cell1	The UE camps on cell 1 which is the former PCell.
Neighbour cell		1, 2, 3, 4	Cell2	The UE shall perform inter-RAT measurements on cell 2 which is the former PSCell.
RF Channel Number		1, 2, 3, 4	1, 2	
Time offset between cells		1, 2, 3, 4	3 µs	Synchronous cells
Access Barring Information	-	1, 2, 3,4	Not Sent	No additional delays in random access procedure.
SSB configuration		1, 2	SSB.1 FR1	Serving cell
		3, 4	SSB.2 FR1	Serving cell
SMTC configuration Serving cell		1, 2, 3, 4	SMTC.2	
DRX cycle length	s	1, 2, 3, 4	1.28	The value shall be used for all cells in the test.
PRACH configuration index		1, 2, 3, 4	190	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell		1, 2, 3, 4	Not configured	
T3	s	1, 2, 3, 4	0.5	T3 needs to be defined so that cell measurement time is taken into account.
T4	s	1, 2, 3, 4	65	T4 needs to be defined so that cell measurement time is taken into account.

A.6.6.15.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During time durations T1 the UE shall start transmitting preamble on PSCell. During T2 the UE perform intra-frequency measurements on the PCell and the PSCell.

During the time-period T3 the connection is released, and UE enters idle mode. During the time period T3 and T4 the UE is camped in Idle mode and at T4 the signal level of cell 2 is changed. The UE shall not perform reselection. The UE shall perform Idle Mode CA measurement according to Section 4.4.

At the start of T5 the UE is paged for connection setup. During the connection setup the UE is requested to transmit early measurement report. The UE shall send early measurement report to the PCell including idle mode CA/DC measurement from cell 2.

After receiving the requested early measurement report, the test equipment verifies that the accuracy of measurement reported for serving Cell 1 and Cell 2 meets the requirements in Sections 10.1.2B and 10.1.7B and Sections 10.2.4 and 10.2.5, respectively and test ends.

A.6.6.16 PRS-RSRPP measurements

A.6.6.16.1 PRS-RSRPP reporting delay test case for single positioning frequency layer in FR1 in RRC_CONNECTED state

A.6.6.16.1.1 Test purpose and Environment

The purpose of the test is to verify that the PRS-RSRPP measurement meets the delay requirements specified in clause 9.9.6.5 in an environment with AWGN propagation conditions.

The supported test configurations are specified in Table A.6.6.16.1.1-1.

Table A.6.6.16.1.11: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

In the test there are two synchronous cells: Cell 1 and Cell 2. Cell 1 is the reference as well as the PCell. Cell 2 is a neighbour cell. Both cells are on the same NR RF channel in FR1. The test consists of two consecutive time intervals, with duration of T1 and T2. Both cells transmit PRS during T2.

The *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message as defined in TS 37.355 shall be provided to the UE during T1. The last slot containing the two messages for the assistance data and location information request is denoted as #n.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance containing the PRS resources that is ΔT after slot #n, where ΔT = 50 ms is the maximum processing time of the assistance data and location information request.

The general test parameters are listed in Table A.6.6.16.1.1-2, and cell specific test parameters are listed in Table A.6.6.16.1.1-3.

Table A.6.6.16.1.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Reference cell		1, 2, 3	Cell 1	Cell 1 is the PCell and the DL-AoD reference cell in the positioning assistance data.
Neighbour cell		1, 2, 3	Cell 2	Cell 2 is a neighbour cell in the positioning assistance data.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2	
$BW_{channel}$	MHz	1	10: $N_{RB,c}$ = 52	
		2	10: $N_{RB,c}$ = 52	
		3	40: $N_{RB,c}$ = 106	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	

		3	SMTC.1	
Measurement gap		1, 2, 3	GP#24 or GP#0 Note 1	
CP length		1, 2, 3	Normal	
DRX		1, 2, 3	NA	OFF
Time offset between serving and neighbour cells	µs	1, 2, 3	3	Synchronous cells
Expected RSTD	µs	1, 2, 3	3	
Expected RSTD uncertainty	µs	1, 2, 3	5	
T1	s	1, 2, 3	2	
T2	s	1, 2, 3	[5]	
NOTE 1: GP#24 is configured if UE supports MG#24, otherwise GP#0 is configured.				

Table A.6.6.16.1.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD			
		3	CR.2.1 TDD			
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD			
		3	CCR.2.1 TDD			
OCNG Patterns		1, 2, 3	OP.1		OP.1	
TRS Configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD			
		3	TRS.1.2 TDD			
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		N/A	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1		N/A	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1		N/A	
PRS configuration		1	PRS.1.4 FR1		PRS.1.4 FR1	
		2	PRS.1.4 FR1		PRS.1.4 FR1	
		3	PRS.2.4 FR1		PRS.2.4 FR1	
PRS muting info		1, 2, 3	'10'		'01'	
N_{oc} Note 2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1	-98			
		2				
		3				
PRS $\hat{E}_s/I_{ot}$	dB	1	-Infinity	-3	-Infinity	-10
		2				
		3				
PRS $\hat{E}_s/N_{oc}$	dB	1	-Infinity	-3	-Infinity	-10
		2				
		3				
PRS-RSRP Note 3	dBm/SCS kHz	1	-Infinity	-101	-Infinity	-108
		2	-Infinity	-101	-Infinity	-108
		3	-Infinity	-98	-Infinity	-105
SS-RSRP Note 3	dBm/SCS kHz	1	-88	-88	-88	-88

		2	-88	-88	-88	-88
		3	-85	-85	-85	-85
Io	dBm/9.36 MHz	1	N/A	-62.25	N/A	-62.25
	dBm/9.36 MHz	2		-62.25		-62.25
	dBm/38.16 MHz	3		-56.16		-56.16
Propagation Condition		1, 2, 3	AWGN			
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP/PRS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.6.6.16.1.2 Test Requirements

The UE shall perform and report the PRS-RSRPP measurements for Cell 1 and Cell 2, within the time limit specified in clause 9.9.6.5, starting from the beginning of time interval T2.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.6.16.2 PRS-RSRPP reporting delay test case with reduced number of samples for single positioning frequency layer in FR1 in RRC_CONNECTED state

A.6.6.16.2.1 Test purpose and Environment

The purpose of the test is to verify that the PRS-RSRPP measurement meets the reduced sample measurement delay requirements specified in clause 9.9.6.5 in an environment with AWGN propagation conditions for reduced number of samples. In this test UE that supports *supportedDL-PRS-ProcessingSamples* is configured by LMF to perform PRS measurement with reduced number of samples.

The supported test configurations are specified in Table A.6.6.16.2.1-1.

Table A.6.6.16.2.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

In the test there are two synchronous cells: Cell 1 and Cell 2. Cell 1 is the reference as well as the PCell. Cell 2 is a neighbour cell. Both cells are on the same NR RF channel in FR1. The test consists of two consecutive time intervals, with duration of T1 and T2. Both cells transmit PRS during T2.

The *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message as defined in TS 37.355 shall be provided to the UE during T1. The last slot containing the two messages for the assistance data and location information request is denoted as #n.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance containing the PRS resources that is ΔT after slot #n, where ΔT = 50 ms is the maximum processing time of the assistance data and location information request.

The general test parameters are listed in Table A.6.6.16.2.1-2, and cell specific test parameters are listed in Table A.6.6.16.2.1-3.

Table A.6.6.16.2.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Reference cell		1, 2, 3	Cell 1	Cell 1 is the PCell and the DL-AoD reference cell in the positioning assistance data.
Neighbour cell		1, 2, 3	Cell 2	Cell 2 is a neighbour cell in the positioning assistance data.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2	
$BW_{channel}$	MHz	1	10: $N_{RB,c}$ = 52	
		2	10: $N_{RB,c}$ = 52	
		3	40: $N_{RB,c}$ = 106	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
Measurement gap		1, 2, 3	GP#24 or GP#0 Note 1	
CP length		1, 2, 3	Normal	
DRX		1, 2, 3	NA	OFF
Time offset between serving and neighbour cells	µs	1, 2, 3	3	Synchronous cells
Expected RSTD	µs	1, 2, 3	3	
Expected RSTD uncertainty	µs	1, 2, 3	5	
T1	s	1, 2, 3	2	
T2	s	1, 2, 3	[5]	
NOTE 1: GP#24 is configured if UE supports MG#24, otherwise GP#0 is configured.				

Table A.6.6.16.2.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD			
		3	CR.2.1 TDD			
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD			
		3	CCR.2.1 TDD			
OCNG Patterns		1, 2, 3	OP.1		OP.1	
TRS Configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD			
		3	TRS.1.2 TDD			
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		N/A	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1		N/A	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1		N/A	
PRS configuration		1	PRS.1.4 FR1		PRS.1.4 FR1	
		2	PRS.1.4 FR1		PRS.1.4 FR1	

		3	PRS.2.4 FR1		PRS.2.4 FR1	
PRS BW		1,2,3	48 PRBs		48 PRBs	
PRS muting info		1, 2, 3	'10'		'01'	
N_{oc} Note 2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
PRS $\hat{E}_s/I_{ot}$	dB	1	-Infinity	-3	-Infinity	5
		2				
		3				
PRS $\hat{E}_s/N_{oc}$	dB	1	-Infinity	-3	-Infinity	5
		2				
		3				
PRS-RSRP Note 3	dBm/SCS kHz	1	-Infinity	-101	-Infinity	-93
		2	-Infinity	-101	-Infinity	-93
		3	-Infinity	-98	-Infinity	-90
SS-RSRP Note 3	dBm/SCS kHz	1	-88	-88	-88	-88
		2	-88	-88	-88	-88
		3	-85	-85	-85	-85
Io	dBm/9.36 MHz	1	N/A	-69.5	N/A	-67.9
	dBm/9.36 MHz	2		-69.5		-67.9
	dBm/38.16 MHz	3		-66.4		-64.8
Propagation Condition		1, 2, 3	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP/PRS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.6.16.2.2 Test Requirements

The UE shall perform and report the PRS-RSRPP measurements for Cell 1 and Cell 2, within the time limit specified in clause 9.9.6.5, starting from the beginning of time interval T2.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.6.16.3 PRS-RSRPP reporting delay test case for single positioning frequency layer in FR1 in RRC_CONNECTED state without measurement gap

A.6.6.16.3.1 Test purpose and Environment

The purpose of the test is to verify that the PRS-RSRPP measurement meets the delay requirements specified in clause 9.9.6.6 in an environment with AWGN propagation conditions. Reporting delay test for gapless PRS measurement is conducted assuming that the PRS has higher priority, i.e., state 1, than all other DL signals/channels and is transmitted within active DL BWP of UE. Two sub-tests are defined, sub-test 1 is for N_{sample} = 4 and sub-test 2 is for N_{sample} = 1. For sub-test 2 LMF indicates UE to perform PRS measurement with N_{sample} = 1. The cell specific parameters for sub-test 1 and sub-test 2 are defined in Table A.6.6.16.3.1-3.

The supported test configurations are specified in Table A.6.6.16.3.1-1.

Table A.6.6.16.3.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Note: The UE is only required to be tested in one of the supported test configurations.

In the test there are two synchronous cells: Cell 1 and Cell 2. Cell 1 is the reference as well as the PCell. Cell 2 is a neighbour cell. Both cells are on the same NR RF channel in FR1. The test consists of two consecutive time intervals, with duration of T1 and T2. Both cells transmit PRS during T2.

The *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message as defined in TS 37.355 shall be provided to the UE during T1. The last slot containing the two messages for the assistance data and location information request is denoted as #n.

The beginning of the time interval T2 shall be aligned with the beginning of the first PRS processing window instance containing the PRS resources that is ΔT after slot #n, where ΔT = 50 ms is the maximum processing time of the assistance data and location information request.

The UE is configured with PPW before start of T2.

The general test parameters are listed in Table A.6.6.16.3.1-2, and cell specific test parameters are listed in Table A.6.6.16.3.1-3.

Table A.6.6.16.3.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Reference cell		1, 2, 3	Cell 1	Cell 1 is the PCell and the DL-AoD reference cell in the positioning assistance data.
Neighbour cell		1, 2, 3	Cell 2	Cell 2 is a neighbour cell in the positioning assistance data.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2	
$BW_{channel}$	MHz	1	10: $N_{RB,c}$ = 52	
		2	10: $N_{RB,c}$ = 52	
		3	40: $N_{RB,c}$ = 106	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
PPW configuration		1,2,3	Table A.3.X-1: Reference PPW configuration	As defined in A.3.X
CP length		1, 2, 3	Normal	
DRX		1, 2, 3	NA	OFF
Time offset between serving and neighbour cells	µs	1, 2, 3	- set to the UE reported capability for receive time difference threshold if the UE reported value is < 3µs - 3µs otherwise	Synchronous cells
Expected RSTD	µs	1, 2, 3	0	
Expected RSTD uncertainty	µs	1, 2, 3	Same as time offset	
T1	s	1, 2, 3	2	
T2	ms	1, 2, 3	10	In this test UE is configured to measure single PFL within the configured PPW.

Table A.6.6.16.3.1-3: Cell specific test parameters T2

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			Sub-test 1	Sub-test 2	Sub-test 1	Sub-test 2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD			
		3	CR.2.1 TDD			
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD			
		3	CCR.2.1 TDD			
OCNG Patterns		1, 2, 3	OP.1		OP.1	
TRS Configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD			
		3	TRS.1.2 TDD			
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		N/A	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1		N/A	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1		N/A	
PRS configuration		1	PRS.1.4 FR1		PRS.1.4 FR1	
		2	PRS.1.4 FR1		PRS.1.4 FR1	
		3	PRS.2.4 FR1		PRS.2.4 FR1	
PRS configuration			48 PRBs for sub-test 2		48 PRBs for sub-test 2	
PRS muting info		1, 2, 3	'10'		'01'	
N_{oc} Note 2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1	-98			
		2				
		3				
PRS $\hat{E}_s/I_{ot}$	dB	1	-3	-3	-10	5
		2				
		3				
PRS $\hat{E}_s/N_{oc}$	dB	1	-3	-3	-10	5
		2				
		3				
PRS-RSRP Note 3	dBm/SCS kHz	1	-101	-101	-108	-93
		2	-101	-101	-108	-93
		3	-98	-98	-105	-90
SS-RSRP Note 3	dBm/SCS kHz	1	-88	-88	-88	-88
		2	-88	-88	-88	-88
		3	-85	-85	-85	-85
Io	dBm/9.36 MHz	1	-62.25	-62.25	-62.25	-67.9
	dBm/9.36 MHz	2	-62.25	-62.25	-62.25	-67.9
	dBm/38.16 MHz	3	-56.16	-56.16	-56.16	-61.8
Propagation Condition		1, 2, 3	AWGN			

Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP/PRS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.6.16.3.2 Test Requirements

The UE shall perform and report the PRS-RSRPP measurements for Cell 1 and Cell 2, within the time limit specified in clause 9.9.6.6, starting from the beginning of time interval T2.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.6.17 SA event triggered reporting tests with Pre-MG

A.6.6.17.1 SA event triggered reporting tests with autonomous activation/deactivation Pre-MG

A.6.6.17.1.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clause 9.2.6.2 and 9.2.6.3. And this test will also jointly verify Pre-configured measurement gap activation/deactivation delay in clause 8.19.2.

A.6.6.17.1.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for PCell are given in Table A.6.6.17.1.2-1 and A.6.6.17.1.2-2 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively.

During the duration of T1,

- UE is configured with 2 different UE-specific bandwidth parts for Cell 1 (PCell), BWP-1 and BWP-2, before starting the test.
- BWP-1 includes bandwidth of the initial DL BWP and SSB with the Pre-MG status set to ‘deactivated’.
- BWP-2 does not include bandwidth of the initial DL BWP and SSB with the Pre-MG status set to ‘activated’.

UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in PCell.

- At the start of time duration T2, the serving gNB can trigger Pre-MG activation starts when a DCI format 1_1 command for PCell DL BWP switch, sent from the test equipment to the UE, is received at the UE side in PCell’s slot # denoted i. The UE shall switch its bandwidth part from BWP-1 to BWP-2. And UE is expected to complete the Pre-MG activation within T2.

- At the start of time duration T3, the UE may not have any timing information of neighbor cell to be measured (e.g. cell 2). And UE was expected to complete the measurements of SSBs with the activated Pre-MG within T3.

There are two BWPs configured in Cell 1, BWP-1 which contains the cell defining SSB, and BWP-2 which does not contain any SSB of Cell 1.

Table A.6.6.17.1.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.6.6.17.1.2-2: General test parameters for SA intra-frequency event triggered reporting with per-UE gaps for PCell in FR1

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3	Cell 1	
Neighbour cell		1, 2, 3	Cell 2	Cell to be identified.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2	
Measurement gap type		1, 2, 3	Per-UE gaps	
Measurement gap 2300epetition periodicity	ms	1, 2, 3	40	
Measurement gap length	ms	1, 2, 3	6	
Measurement gap offset	ms	1, 2, 3	39	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
CSI-RS parameters		1	CSI-RS.1.2 FDD resource #0	
		2	CSI-RS.1.2 TDD resource #0	
		3	CSI-RS.2.2 TDD resource #0	
A3-Offset	dB	1, 2, 3	-4.5	
CP length		1, 2, 3	Normal	
Hysteresis	dB	1, 2, 3	0	
Time To Trigger	s	1, 2, 3	0	
Filter coefficient		1, 2, 3	0	L3 filtering is not used
DRX	ms	1, 2, 3		OFF
Time offset between serving and neighbour cells		1	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 μs	Synchronous cells
		3	3 μs	Synchronous cells
T1	s	1, 2, 3	0.1	

T2	s	1, 2, 3	0.2	
T3	s	1,2, 3	5	
bwp-InactivityTimer	ms		500	

Table A.6.6.17.1.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting with per-UE gaps for PCell in FR1

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
Intial BWP configuration		1,2,3	DLBWP.0.1 ULBWP.0.1			DLBWP.0.1 ULBWP.0.1		
BWP-1 Configuration		1,2,3	DLBWP.1.6 ULBWP.1.6			N/A		
BWP-2 Configuration		1,2,3	DLBWP.1.5 ULBWP.1.5			N/A		
PDSCH RMC configuration		1	SR.1.1 FDD			N/A		
		2	SR.1.1 TDD					
		3	SR.2.1 TDD					
RMSI CORESET RMC configuration		1	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		
Dedicated CORESET RMC configuration		1	CCR.1.2 FDD			CCR.1.1 FDD		
		2	CCR.1.2 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
OCNG Patterns		1, 2, 3	OP.1			OP.1		
TRS configuration		1	TRS.1.1 FDD			N/A		
		2	TRS.1.1 TDD			N/A		
		3	TRS.1.2 TDD			N/A		
IInitial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1			DLBWP.0.1 ULBWP.0.1		
Active DL BWP configuration		1, 2, 3	DLBWP.1.2			DLBWP.1.1		
Active UL BWP configuration		1, 2, 3	ULBWP.1.2			ULBWP.1.1		
RLM-RS		1, 2, 3	CSI-RS			SSB		
N_{oc} Note 2	dBm/SCS	1	-98					
		2	-98					
		3	-95					
N_{oc} Note 2	dBm/15 kHz	1	-98					
		2						
		3						
$\hat{E}_s/I_{ot}$	dB	1	4	-1.46		-Infinity	-1.46	
		2						
		3						
$\hat{E}_s/N_{oc}$	dB	1	4	4		-Infinity	4	
		2						

		3				
SS-RSRP Note 3	dBm/SCS kHz	1	-94	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1	-64.60	-62.25	-64.60	-62.25
	dBm/9.36 MHz	2	-64.60	-62.25	-64.60	-62.25
	dBm/38.16 MHz	3	-58.50	-56.16	-58.50	-56.16
Propagation Condition		1, 2, 3	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.6.17.1.3 Test Requirements

During T1 and T2 the UE shall report corresponding valid ACK/NACK for those PDSCHs scheduled in the slots overlapped with the Pre-MG occasions, starting from the 1st complete Pre-MG occasion after the beginning of PCell's DL slot ($i+T_{BWPswitchDelay}$) + 5ms as defined in clause 8.19.2.

During T3, the UE shall NOT be able to receive PDSCH and report corresponding valid ACK/NACK for those PDSCHs scheduled in the slots overlapped with the Pre-MG occasions.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 800ms from the beginning of time period T3.

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.17.2 SA event triggered reporting tests with pre-configured measurement gaps and network-controlled activation/deactivation

A.6.6.17.2.1 Test purpose and Environment

The purpose of this test is to verify that the UE correctly activates and deactivates the pre-MG and makes correct measurement and reporting of an event with activated and deactivated pre-MG. This test will partly verify the pre-MG activation and deactivation delay requirements in clause 8.19.2 and the intra-frequency cell search requirements in clause 9.2.6.2 and 9.3.4.

A.6.6.17.2.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The supported test configurations are listed in Table A.6.6.17.2.2-1, general test parameters are listed in Table A.6.6.17.2.2-2, and cell specific test parameters are listed in Table A.6.6.17.2.2-3.

In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. A pre-MG is configured before the test.

The UE is configured with 2 dedicated BWPs, BWP-1 and BWP-2. BWP-1 includes bandwidth of the SSB, and *preConfGapStatus* for BWP-1 is set to '0'; BWP-2 does not include bandwidth of the SSB, and *preConfGapStatus* for BWP-2 is set to '1'.

The test consists of 3 successive time periods, with time duration of T1, T2, and T3 respectively. Before the test starts, UE is switched to BWP-1.

The time period T2 starts when a DCI format 1_1 command for PCell DL BWP switch, sent from the test equipment to the UE, is received at the UE side in PCell's slot # denoted *i*. The UE shall switch its bandwidth part from BWP-1 to BWP-2 and complete pre-MG activation during T2.

Time period T3 starts at the beginning of the first complete MG occasion after slot # *i+k*, where *k* is number of slots corresponding to the length of DCI based BWP switch delay plus 5ms. During T3, UE shall perform intra-frequency measurement with pre-MG activated.

During time duration T1 and T2, the UE shall not have any timing information of Cell 2.

Table A.6.6.17.2.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.6.6.17.2.2-2: General test parameters for SA intra-frequency event triggered reporting with with pre-configured measurement gaps and network-controlled activation/deactivation

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3	Cell 1	
Neighbour cell		1, 2, 3	Cell 2	Cell to be identified.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2	
Measurement gap type		1, 2, 3	Per-UE gaps	
Measurement gap repitition periodicity	ms	1, 2, 3	40	
Measurement gap length	ms	1, 2, 3	6	
Measurement gap offset	ms	1, 2, 3	39	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
CSI-RS parameters		1	CSI-RS.1.2 FDD resource #0	
		2	CSI-RS.1.2 TDD resource #0	
		3	CSI-RS.2.2 TDD resource #0	
A3-Offset	dB	1, 2, 3	-4.5	
CP length		1, 2, 3	Normal	
Hysteresis	dB	1, 2, 3	0	
Time To Trigger	s	1, 2, 3	0	
Filter coefficient		1, 2, 3	0	L3 filtering is not used

DRX	ms	1, 2, 3		OFF
Time offset between serving and neighbour cells		1	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 μs	Synchronous cells
		3	3 μs	Synchronous cells
T1	s	1, 2, 3	0.1	
T2	s	1, 2, 3	0.1	
T3	s	1, 2, 3	5	

Table A.6.6.17.2.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting with with pre-configured measurement gaps and network-controlled activation/deactivation

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
PDSCH RMC configuration		1	SR.1.1 FDD			N/A		
		2	SR.1.1 TDD					
		3	SR.2.1 TDD					
RMSI CORESET RMC configuration		1	CR.1.1 FDD			N/A		
		2	CR.1.1 TDD			N/A		
		3	CR.2.1 TDD			N/A		
Dedicated CORESET RMC configuration		1	CCR.1.2 FDD			N/A		
		2	CCR.1.2 TDD			N/A		
		3	CCR.2.1 TDD			N/A		
OCNG Patterns		1, 2, 3	OP.1			OP.1		
TRS configuration		1	TRS.1.1 FDD			N/A		
		2	TRS.1.1 TDD			N/A		
		3	TRS.1.2 TDD			N/A		
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1			N/A		
Active DL BWP configuration for BWP-1		1, 2, 3	DLBWP.1.3			N/A		
Active UL BWP configuration for BWP-1		1, 2, 3	ULBWP.1.3			N/A		
Active DL BWP configuration for BWP-2		1, 2, 3	DLBWP.1.2			N/A		
Active UL BWP configuration for BWP-2		1, 2, 3	ULBWP.1.2			N/A		
RLM-RS		1, 2, 3	CSI-RS			N/A		
N_{oc} Note 2	dBm/SCS	1	-98					

		2	-98					
		3	-95					
N_{oc} Note 2	dBm/15 kHz	1	-98					
		2						
		3						
$\hat{E}_s/I_{ot}$	dB	1,2,3	-1.46	4	-1.46	-1.46	-Infinity	-1.46
$\hat{E}_s/N_{oc}$	dB	1,2,3	4	4	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS kHz	1,2	-94	-94	-94	-94	-Infinity	-94
		3	-91	-91	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1,2	-64.60	-64.60	-62.25	-62.25	-64.60	-62.25
	dBm/38.16 MHz	3	-58.50	-58.50	-56.16	-56.16	-58.50	-56.16
Propagation Condition		1, 2, 3	AWGN					

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2 and T4.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.6.17.2.3 Test Requirements

During T1, UE shall report corresponding HARQ-ACK for those PDSCHs scheduled in the slots overlapped with the pre-MG occasions.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 800 ms from the beginning of time period T3. During T3, UE is not required to report corresponding HARQ-ACK for those PDSCHs scheduled in the slots overlapped with the pre-MG occasions.

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.17.3 Void

A.6.6.17.3.1 Void

A.6.6.17.3.2 Void

A.6.6.17.3.3 Void

A.6.6.18 SA event triggered reporting tests with concurrent gaps

A.6.6.18.1 SA event triggered reporting tests for FR1 concurrent gaps with non-overalpping scenario for SSB-based measurements in both inter-frequency layers

A.6.6.18.1.1 Test Purpose and Environment

The purpose of this test is to verify that the concurrent gaps capable UE makes correct reporting of events. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are three cells: NR cell 1 as PCell in FR1 on NR RF channel 1, NR cell 2 as neighbour cell in FR1 on NR RF channel 2, and NR cell 3 as neighbour cell in FR1 on NR RF channel 3. The test parameters are given in Tables A.6.6.18.1.1-1, A.6.6.18.1.1-2 and A.6.6.18.1.1-3.

Two measurement gap patterns (MeasGapId #1 and MeasGapId #2) are configured with the gap pattern ID #0 and #1 as defined in Table A.6.6.18.1.1-2. MeasGapId #2 is configured with a higher priority than MeasGapId #1. MeasGapId #1 and MeasGapId #2 are associated with the MOs for RF channel numbers #2 and #3, respectively.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used for both frequency layers. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2 and NR cell 3.

Table A.6.6.18.1.1-1: SA event triggered reporting tests for FR1-FR1

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: Target NR cells have the same SCS, BW and duplex mode as NR serving cells	

Table A.6.6.18.1.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 concurrent gaps with fully non-overalpping scenario for SSB-based measurements in both inter-frequency layers

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2,3	1, 2, 3	Three FR1 NR carrier frequencies are used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cells 2 and 3	NR cell 2 is on NR RF channel number 2. NR cell 3 is on NR RF channel number 3.
Gap Pattern Id		Config 1,2,3	0 for MeasGapId #1 1 for MeasGapId #2	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	39 for MeasGapId #1 19 for MeasGapId #2	
A3-Offset	dB	Config 1,2,3	-6	
Hysteresis	dB	Config 1,2,3	0	
CP length		Config 1,2,3	Normal	
TimeToTrigger	s	Config 1,2,3	0	
Filter coefficient		Config 1,2,3	0	L3 filtering is not used
DRX		Config 1,2,3	OFF	DRX is not used

Time offset between serving and neighbour cell 1		Config 1, 2, 3	3μs		Synchronous.
Time offset between serving and neighbour cell 2		Config 1, 2, 3	5ms		Asynchronous. The timing of Cell 3 is 5ms later than the timing of Cell 1.
T1	s	Config 1,2,3	5		
T2	s	Config 1,2,3	1.5	1.5	

Table A.6.6.18.1.13: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 concurrent gaps with fully non-overalpping scenario for SSB-based measurements in both inter-frequency layers

Parameter		Unit	Test configuration	Cell 1		Cell 2		Cell 3	
				T1	T2	T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2		3	
Duplex mode			Config 1	FDD					
			Config 2,3	TDD					
TDD configuration			Config 1	Not Applicable					
			Config 2	TDDConf.1.1					
			Config 3	TDDConf.2.1					
$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c}$ = 52					
			Config 3	40: $N_{RB,c}$ = 106					
BWP BW		MHz	Config 1,2	10: $N_{RB,c}$ = 52					
			Config 3	40: $N_{RB,c}$ = 106					
BWP configuration	Initial DL BWP		Config 1, 2, 3	DLBWP.0.1		NA		NA	
	Initial UL BWP			ULBWP.0.1		NA		NA	
	Dedicated DL BWP			DLBWP.1.1		NA		NA	
	Dedicated UL BWP			ULBWP.1.1		NA		NA	
TRS configuration			Config 1	TRS.1.1 FDD		NA		NA	
			Config 2	TRS.1.1 TDD		NA		NA	
			Config 3	TRS.1.2 TDD		NA		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1		OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD					
			Config 2	SR.1.1 TDD					
			Config 3	SR.2.1 TDD					
RMSI CORESET Reference Channel			Config 1	CR.1.1 FDD					
			Config 2	CR.1.1 TDD					
			Config 3	CR.2.1 TDD					
Dedicated CORESET Reference Channel			Config 1	CCR.1.1 FDD					
			Config 2	CCR.1.1 TDD					
			Config 3	CCR.2.1 TDD					
SSB parameters			Config 1,2,3	SSB.1 FR1		SSB.1 FR1		SSB.1 FR1	
SMTC configuration defined in A.3.11			Config 1,2,3	SMTC.2		SMTC.2		SMTC.2	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	15					
			Config 3	30					
EPRE ratio of PSS to SSS			Config 1,2,3	0		0		0	

EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} Note2	dBm/15kHz		-98		-98		-98	
N_{oc} Note2	dBm/SCS	Config 1,2	-98		-98		-98	
		Config 3	-95		-95		-95	
SS-RSRP Note 3	dBm/SCS	Config 1,2	-94	-94	-Infinity	-91	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3	4	4	-Infinity	7	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3	4	4	-Infinity	7	-Infinity	7
Io Note3	dBm/9.36 MHz	Config 1,2	-64.59	-64.59	-70.05	-62.26	-70.05	-62.26
	dBm/38.16MHz	Config 3	-58.49	-58.49	-63.94	-56.15	-63.94	-56.15
Propagation Condition		Config 1,2,3	AWGN		AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.6.6.18.1.2 Test Requirements

The UE shall send one Event A3 triggered measurement report for each neighboring cell, with a measurement reporting delay less than 920 ms for cell 2 and 1280ms for cell 3 from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.18.2 SA event triggered reporting tests for FR1 concurrent gap with partially partial overalpping scenario for SSB-based measurements in both inter-frequency layers

A.6.6.18.2.1 Test Purpose and Environment

The purpose of this test is to verify that the concurrent gap capable UE makes correct reporting of events. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are three cells: NR cell 1 as PCell in FR1 on NR RF channel 1, NR cell 2 as neighbour cell in FR1 on NR RF channel 2, and NR cell 3 as neighbour cell in FR1 on NR RF channel 3. The test parameters are given in Tables A.6.6.18.2.1-1, A.6.6.18.2.1-2 and A.6.6.18.2.1-3. The TE schedules continuous DL data on PCell throughout the test.

Two measurement gap patterns (MeasGapId #1 and MeasGapId #2) are configured with the gap pattern ID #0 and #1 as defined in Table A.6.6.18.2.1-2. MeasGapId #2 is configured with a higher priority than MeasGapId #1. MeasGapId #1 and MeasGapId #2 are associated with the MOs for RF channel numbers #2 and #3, respectively.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used for both frequency layers. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2 and NR cell 3.

Table A.6.6.18.2.1-1: SA event triggered reporting tests for FR1-FR1

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: Target NR cells have the same SCS, BW and duplex mode as NR serving cells	

Table A.6.6.18.2.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 concurrent gap with partially partial overalpping scenario for SSB-based measurements in both inter-frequency layers

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2,3	1, 2, 3	Three FR1 NR carrier frequencies are used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cells 2 and 3	NR cell 2 is on NR RF channel number 2. NR cell 3 is on NR RF channel number 3.
Gap Pattern Id		Config 1,2,3	0 for MeasGapId #1 1 for MeasGapId #2	As specified in clause 9.1.2-1.
Measurement gap offset	ms	Config 1,2,3	39 for MeasGapId #1 4 for MeasGapId #2	
A3-Offset	dB	Config 1,2,3	-6	
Hysteresis	dB	Config 1,2,3	0	
CP length		Config 1,2,3	Normal	
TimeToTrigger	s	Config 1,2,3	0	
Filter coefficient		Config 1,2,3	0	L3 filtering is not used
DRX		Config 1,2,3	OFF	DRX is not used

Time offset between serving and neighbour cell 1		Config 1, 2, 3	3μs		Synchronous.
Time offset between serving and neighbour cell 2		Config 1, 2, 3	5ms		Asynchronous. The timing of Cell 3 is 5ms later than the timing of Cell 1.
T1	s	Config 1,2,3	5		
T2	s	Config 1,2,3	1.5	1.5	

Table A.6.6.18.2.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 concurrent gap with partially-partial overalpping scenario for SSB-based measurements in both inter-frequency layers

Parameter		Unit	Test configuration	Cell 1		Cell 2		Cell 3	
				T1	T2	T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2		3	
Duplex mode			Config 1	FDD					
			Config 2,3	TDD					
TDD configuration			Config 1	Not Applicable					
			Config 2	TDDConf.1.1					
			Config 3	TDDConf.2.1					
$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c}$ = 52					
			Config 3	40: $N_{RB,c}$ = 106					
BWP BW		MHz	Config 1,2	10: $N_{RB,c}$ = 52					
			Config 3	40: $N_{RB,c}$ = 106					
BWP configuration	Initial DL BWP		Config 1, 2, 3	DLBWP.0.1		NA		NA	
	Initial UL BWP			ULBWP.0.1		NA		NA	
	Dedicated DL BWP			DLBWP.1.1		NA		NA	
	Dedicated UL BWP			ULBWP.1.1		NA		NA	
TRS configuration			Config 1	TRS.1.1 FDD		NA		NA	
			Config 2	TRS.1.1 TDD		NA		NA	
			Config 3	TRS.1.2 TDD		NA		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1		OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD					
			Config 2	SR.1.1 TDD					
			Config 3	SR.2.1 TDD					
RMSI CORESET Reference Channel			Config 1	CR.1.1 FDD					
			Config 2	CR.1.1 TDD					
			Config 3	CR.2.1 TDD					
Dedicated CORESET Reference Channel			Config 1	CCR.1.1 FDD					
			Config 2	CCR.1.1 TDD					
			Config 3	CCR.2.1 TDD					
SSB parameters			Config 1,2,3	SSB.1 FR1		SSB.1 FR1		SSB.1 FR1	
SMTC configuration defined in A.3.11			Config 1,2,3	SMTC.2		SMTC.2		SMTC.7	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	15					
			Config 3	30					
EPRE ratio of PSS to SSS			Config 1,2,3	0		0		0	

EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} Note2	dBm/15kHz		-98		-98		-98	
N_{oc} Note2	dBm/SCS	Config 1,2	-98		-98		-98	
		Config 3	-95		-95		-95	
SS-RSRP Note 3	dBm/SCS	Config 1,2	-94	-94	-Infinity	-91	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3	4	4	-Infinity	7	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3	4	4	-Infinity	7	-Infinity	7
Io Note3	dBm/9.36 MHz	Config 1,2	-64.59	-64.59	-70.05	-62.26	-70.05	-62.26
	dBm/38.16MHz	Config 3	-58.49	-58.49	-63.94	-56.15	-63.94	-56.15
Propagation Condition		Config 1,2,3	AWGN		AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.6.6.18.2.2 Test Requirements

The UE shall send one Event A3 triggered measurement report for each neighboring cell, with a measurement reporting delay less than 1280 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.18.3 SA NR - E-UTRAN and NR FR1 concurrent event-triggered reporting in non-DRX in FR1

A.6.6.18.3.1 Test Purpose and Environment

The purpose of this set of tests is to verify that the UE makes correct event-triggered reporting of concurrent inter-RAT E-UTRAN and NR FR1 measurements when operating in standalone (SA) operation with PCell in FR1. This test shall partly verify the cell search and measurement requirements in Clauses 9.4.2, 9.4.3, 9.3.4 and 9.3.5.

In each test there are three cells: Cell 1, Cell 2 and Cell 3. Cell 1 is the NR PCell, Cell 2 is an Inter-frequency NR FR1 neighbour cell on NR RF channel 2 and Cell 3 is an inter-RAT E-UTRAN neighbour cell on LTE RF channel 3.

In the measurement control information from the PCell it is indictated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) is to be used for the E-UTRAN cell (cell 3). In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A4 is used for the NR FR1 cell (cell 2).

Each test consists of two consecutive time periods, with durations T1 and T2, respectively. Prior to the start of time duration T1, the UE shall be fully synchronized to Cell 1. During T1, the UE shall not have any information on Cell 2 and Cell 3.

In the test two concurrent per-UE measurement gap pattern configurations # 0 as defined in Table A.6.6.18.3.1-2 are provided for a UE. Two measurement gap patterns (MeasGapId #1 and MeasGapId #2) are configured with the gap pattern ID #1 as defined in Table A.6.6.18.3.1-2. MeasGapId #2 is configured with a higher priority than MeasGapId #1. MeasGapId #1 and MeasGapId #2 are associated with the MOs for NR RF channel numbers #2 and LTE RF channel #3, respectively.

Supported test configurations are shown in table A.6.6.18.3.1-1. General test parameters are provided in Table A.6.6.18.3.1-2 below. Test parameters for Cell 1, Cell 2 and Cell 3, valid for both time duration T1 and T2, are provided in Tables A.6.6.18.3.1-3 and A.6.6.18.3.1-4, respectively.

The test parameters and configurations are given in Tables A.6.6.18.3.1-1, A.6.6.18.3.1-2, and A.6.6.18.3.1-3.

Table A.6.6.18.3.1-1: Supported test configurations in SA concurrent inter-RAT E-UTRAN and NR FR2 inter-frequency event triggered reporting in non-DRX with PCell in FR1

Configuration	Description	Description of target cell
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE: FDD. NR: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE: FDD. NR: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	LTE: FDD. NR: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE: TDD. NR: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE: TDD. NR: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode

6	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	LTE: TDD. NR: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations		

Table A.6.6.18.3.1-2: General test parameters for SA concurrent inter-RAT E-UTRAN and NR FR2 inter-frequency event triggered reporting in non-DRX with PCell in FR1

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		1 - 6	1, 2	2 NR carrier frequency is used in the test. 1 FR1 and FR2 carrier frequency.
LTE RF Channel Number			3	1 LTE carrier frequency is used in the test
Channel Bandwidth	MHz	1 - 6	As specified in Tables A.6.6.3.1.1-2 and A.6.6.3.1.1-3.	
Active cell		1 - 6	NR Cell 1 (PCell in FR1)	Cell 1 is on NR RF channel number 1
Neighbour cell 1		1 - 6	Cell 2 (NR FR2)	Cell 2 is on NR RF channel number 2
Neighbour cell 2		1 - 6	Cell 3 (LTE)	Cell 3 is on LTE RF channel number 3
Gap Pattern Id		1 - 6	0 for MeasGapId #1 0 for MeasGapId #2	As specified in Clause Table 9.1.2-1. Per-UE gap pattern.
Measurement gap offset		1 – 6	19 for MeasGapId #1 39 for MeasGapId #2	
NR measurement quantity			SS-RSRP	Measurement quantity for Cell 1
NR measurement quantity			SS-RSRP	Measurement quantity for Cell 2
Inter-RAT E-UTRAN measurement quantity			RSRP	Measurement quantity for Cell 3
CSI-RS for tracking parameters on NR RF Channel 1		1, 4	TRS.1.1 FDD	
		2, 5	TRS.1.1 TDD	
		3, 6	TRS.1.2 TDD	
SMTC-SSB parameters on NR RF Channel 1		1, 4	SSB.1 FR1	As specified in clause A.3.10.1
		2, 5	SSB.1 FR1	As specified in clause A.3.10.1
		3, 6	SSB.2 FR1	As specified in clause A.3.10.1
SMTC-SSB parameters on NR RF Channel 2		1 - 6	SSB.3 FR2	As specified in clause A.3.10.2
b2-Threshold1	dBm		As specified in Table A.6.3.1.4-3	SS-RSRP threshold for SS-RSRP measurement on Cell 3 for event B2
b2-Threshold2EUTRA	dBm		-95	E-UTRAN RSRP threshold for SS-RSRP measurement on Cell 3 for event B2
Hysteresis	dB	1 – 6	0	
TimeToTrigger	s	1 – 6	0	
Filter coefficient		1 – 6	0	L3 filtering is not used
offsetMO	dB	1 - 6	6	NR Cell 2
a4-Threshold	dBm	1 – 6	-105	NR Cell 2
DRX			OFF	OFF
Time offset between serving and neighbour cells		1, 4	3ms	Asynchronous cells NR cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2, 3, 5, 6	3μs	Synchronous NR cells.
T1	s	1 – 6	5	for LTE Cell 3 and NR FR2 Cell 2

T2	s	1 - 6	5	for LTE Cell 3
			5.2 for PC1; 3.5 for other PC	for NR FR2 Cell 2

Table A.6.6.18.3.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2 without SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1,2,3	N/A		Setup 1 as specified in clause A.3.15	
Beam Assumption[Note 7]			Config 1,2,3	N/A		Rough	
NR RF Channel Number			Config 1,2,3	1		2	
Duplex mode			Config 1	FDD		TDD	
			Config 2,3	TDD		TDD	
TDD configuration			Config 1	Not Applicable		TDDConf.3.1	
			Config 2	TDDConf.1.1		TDDConf.3.1	
			Config 3	TDDConf.2.1		TDDConf.3.1	
$BW_{channel}$		MHz	Config 1	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
			Config 2	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
			Config 3	40: $N_{RB,c}$ = 106		100: $N_{RB,c}$ = 66	
Data RBs allocated			Config 1	52		66	
			Config 2	52		66	
			Config 3	106		66	
BWP BW		MHz	Config 1	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
			Config 2	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
			Config 3	40: $N_{RB,c}$ = 106		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD		-	
			Config 2	SR.1.1 TDD			
			Config 3	SR.2.1 TDD			
RMSI CORESET Reference Channel			Config 1	CR.1.1 FDD		-	
			Config 2	CR.1.1 TDD			
			Config 3	CR.2.1 TDD			
Dedicated CORESET RMC configuration			Config 1	CCR.1.1 FDD		-	
			Config 2	CCR.1.1 TDD			
			Config 3	CCR.2.1 TDD			
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1	SMTC.2		SMTC.2	
			Config 2,3	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	15		120	
			Config 3	30		120	
EPRE ratio of PSS to SSS							
EPRE ratio of PBCH DMRS to SSS							

EPRE ratio of PBCH to PBCH DMRS		Config 1,2,3	0	0	
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
$\hat{E}_s$	dBm/SCS	Config 1,2,3	NA Link only, see clause A.3.7A	-Infinity	-87
SSB_RP Note 3	dBm/SCS	Config 1,2		-Infinity	-87
	Note5	Config 3		-Infinity	-87
$\hat{E}_s / I_{ot}$ BB Note 8	dB	Config 1,2,3		-Infinity	14.69
	dBm/95.04 MHz Note5	Config 1,2,3		-Infinity	-58.01
Propagation Condition		Config 1,2,3		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: SS B_RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Void
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 8: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.

Table A.6.6.18.3.1-4: E-UTRAN neighbour cell specific test parameters for SA inter-RAT E-UTRAN event triggered reporting in non-DRX with PCell in FR1

Parameter	Unit	Configuration	Cell 3	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6	1	
Duplex mode		1, 2, 3	FDD	
		4, 5, 6	TDD	
TDD special subframe configuration Note1		4, 5, 6	6	
TDD uplink-downlink configuration Note1		4, 5, 6	1	
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel Note2		1, 2, 3	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	

		4, 5, 6	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]		1, 2, 3	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
PBCH_RA PBCH_RB PSS_RA SSS_RA PCFICH_RB PHICH_RA PHICH_RB PDCCH_RA PDCCH_RB PDSCH_RA PDSCH_RB OCNG_RA[Note3] OCNG_RB[Note3]	dB	1, 2, 3, 4, 5, 6	0	
N_{oc}[Note4]	dBm/15kHz	1, 2, 3, 4, 5, 6	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	-Infinity	17
$\hat{E}_s/I_{ot}$[Note5]	dB	1, 2, 3, 4, 5, 6	-Infinity	17
RSRP[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-87
SCH_RP[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-87
Io[Note5]	dBm/9MHz	1, 2, 3, 4, 5, 6	-76.22+10log ($N_{RB,c}$ /50)	-59.13+10log ($N_{RB,c}$ /50)
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x2 Low	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.6.18.3.2 Test Requirements

In this test with per-UE gap, the UE shall send one Event A4 triggered measurement report for Cell 2, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

5120 for UE supporting power class 1, or

3200 for UE supporting other power class.

The UE shall send one Event B2 triggered measurement report for Cell 3 to the PCell, with a measurement reporting delay less than 3.84s from the start of period T2.

The measurement reporting delay is defined as the time from the beginning of time period T2 to the moment when the UE sends the measurement report on PUSCH.

The UE shall not send event-triggered measurement reports as long as the reporting criteria is not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.18.4 SA event triggered reporting tests for PRS and SSB measurement in FR1 without SSB time index detection when DRX is not used

A.6.6.18.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA NR measurements with concurrent gaps requirements in clause 9.2.6(when one of concurrent gaps in same frequency layer of serving cells), 9.3.6(when one of concurrent gaps in the different frequency layer of serving cells) and 9.9.2(when one of concurrent gaps used for PRS measurement).

In this test, there are three cells: NR cell 1 as PCell in FR1 on NR RF channel 1, NR cell 2 as neighbour cell in FR1 on NR RF channel 2 and NR cell 3 as neighbor cell in FR1 on NR RF channel 1. The test parameters are given in Tables A.6.6.18.4.1-1, A.6.6.18.4.1-2 and A.6.6.18.4.1-3.

Two measurement gap patterns (MeasGapId #1 and MeasGapId #2) are configured with the gap pattern ID #0 and #1 as defined in Table A.6.6.18.4.1-2. MeasGapId #2 is configured with a higher priority than MeasGapId #1. MeasGapId #1 and MeasGapId #2 are associated with the MOs for RF channel numbers #1 and #2, respectively.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2 and NR cell 3. Cell 1 and cell 3 transmit PRS during T2.

The *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message as defined in TS 37.355 shall be provided to the UE during T1. The last slot containing the two messages for the assistance data and location information request is denoted as #n.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance of MeasGapId #2 containing the PRS resources that is ΔT after slot #n, where ΔT = 50 ms is the maximum processing time of the assistance data and location information request.

Table A.6.6.18.4.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.6.6.18.4.1-2: General test parameters for SA inter-frequency event triggered reporting for concurrent gaps with partially partial overalpping scenario for SSB-based measurements and PRS measurement

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		1,2,3	1: Cell 1 and Cell 3 2: Cell 2	Two TDD carrier frequencies are used for the NR cells.
Active cell		1,2,3	NR cell 1 (Pcell)	Cell 1 is the PCell and the DL-AoD reference cell in the positioning assistance data.
Neighbour cell		1,2,3	NR cell 2, NR cell 3	Cell 2 is an inter-frequency cell neighbor cell Cell 3 is a neighbour cell in the positioning assistance data.
$BW_{channel}$	MHz	1	10: $N_{RB,c}$ = 52	
		2	10: $N_{RB,c}$ = 52	
		3	40: $N_{RB,c}$ = 106	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
Gap Pattern Id		Config 1,2,3	0 for MeasGapId #1 24 for MeasGapId #2	
Measurement gap offset	ms	Config 1,2,3	7 for MeasGapId #1 11 for MeasGapId #2	
DRX		1, 2, 3	NA	OFF
Time offset between serving and neighbour cells	µs	1, 2, 3	3	Synchronous cells
Expected RSTD	µs	1, 2, 3	3	
Expected RSTD uncertainty	µs	1, 2, 3	5	
T1	s	1, 2, 3	2	
T2	s	1, 2, 3	5	
NOTE 1: GP#24 is configured if UE supports MG#24, otherwise GP#0 is configured.				

Table A.6.6.18.4.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 concurrent gap with partially-partial overalpping scenario for SSB-based measurements and PRS measurement

Parameter		Unit	Test configuration	Cell 1		Cell 2		Cell 3	
				T1	T2	T1	T2	T1	T2
TDD configuration			1	N/A		N/A		N/A	
			2	TDDConf.1.1		TDDConf.1.1		TDDConf.1.1	
			3	TDDConf.2.1		TDDConf.2.1		TDDConf.2.1	
$BW_{channel}$		MHz	Config 1,2,3	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP BW		MHz	Config 1,2,3	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1		N/A		N/A	
	Initial UL BWP			ULBWP.0.1		N/A		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A		N/A	

OCNG Patterns defined in A.3.2.1.1 (OP.1)		Config 1,2,3	OP.1		OP.1		OP.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A		N/A	
		2	SR.1.1 TDD					
		3	SR.2.1 TDD					
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A		N/A	
		2	CR.1.1 TDD		N/A		N/A	
		3	CR.2.1 TDD		N/A		N/A	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		N/A		N/A	
		2	CCR.1.1 TDD		N/A		N/A	
		3	CCR.2.1 TDD		N/A		N/A	
SSB parameters		Config 1	SSB.1 FR2		SSB.1 FR2		SSB.1 FR2	
SMTC configuration defined in A.3.11		Config 1	SMTC.4		SMTC.4		SMTC.4	
TRS Configuration		1	TRS.1.1 FDD		N/A		N/A	
		2	TRS.1.1 TDD		N/A		N/A	
		3	TRS.1.2 TDD		N/A		N/A	
PRS configuration		1	PRS.1.4 FR1		N/A		PRS.1.4 FR1	
		2	PRS.1.4 FR1		N/A		PRS.1.4 FR1	
		3	PRS.2.4 FR1		N/A		PRS.2.4 FR1	
PRS muting configuation		1, 2, 3	‘10’		‘01’		‘01’	
N_{oc} Note2	dBm/15 kHz Note5	1	-98		-98		-98	
		2	-98		-98		-98	
		3	-98		-98		-98	
N_{oc} Note2	dBm/SCS Note4	1	-98		-98		-98	
		2	-98		-98		-98	
		3	-95		-95		-95	
SS-RSRP Note 3	dBm/SCS Note5	1	-94	-94	-Infinity	-94	N/A	N/A
		2	-94	-94	-Infinity	--94	N/A	N/A
		3	-91					
PRS-RSRP Note 3	dBm/SCS Note5	1	-Infinity	--101	N/A	N/A	-Infinity	-108
		2	-Infinity	--101	N/A	N/A	-Infinity	-108
		3	-Infinity	--98	N/A	N/A	-Infinity	-105
PRS $\hat{E}_s / I_{ot}$	dB	1,2,3	-Infinity	-3	N/A	N/A	-Infinity	-10
PRS $\hat{E}_s / N_{oc}$	dB	1,2,3	-Infinity	-3	N/A	N/A	-Infinity	-10
Io Note3	dBm/95.04 MHz Note5	1	-62.25		--64.60	-62.25	-62.25	
		2	-62.25		--64.60	-62.25	-62.25	
		3	-56.16		--58.50	-56.16	-56.16	
Propagation Condition		1,2,3	AWGN					

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP/PRS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6:	As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.6.6.18.4.2 Test Requirements

The UE shall send one Event A3 triggered measurement report for cell 2, with a measurement reporting delay less than 1840ms from the beginning of time period T2.

The PRS RSRP measurement time fulfils the requirements specified in Clause 9.9.3.5. The UE shall perform and report the PRS RSRP measurements for Cell 3 with respect to the reference cell in the DL-AoD assistance data, Cell 1, within the time duration specified in section 9.9.3.5 starting from the beginning of time interval T2.

The rate of the correct events for the neighbour cell observed during repeated tests shall be at least 90%, where the reported PRS RSRP measurement for each correct event shall be within the PRS RSRP reporting range specified in Clause 10.1.24.3, i.e., between PRS RSRP_0 and PRS RSRP_126.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

IUE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.19 SA event triggered reporting tests with NCSG

A.6.6.19.1 SA event triggered reporting tests with NCSG under non-DRX in FR1

A.6.6.19.1.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clause 9.2.7.1 and 9.2.7.2, and also verify the scheduling availability during intra-frequency measurement with NCSG in clause 9.2.7.3.

The serving frequency should be selected for which UE reports ‘ncsg’.

A.6.6.19.1.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for PCell are given in Table A.6.6.19.1.2-1, A.6.6.19.1.2-2 and A.6.6.19.1.2-3 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

During T2, the UE is continuously scheduled with data on the PCell.

The UE is capable of NCSG and report '*ncsg*' through *NeedForGapNCSG-InfoNR* for PCell.

In test 1 NCSG pattern configuration # 0 as defined in Table A.6.6.19.1.2-2 is provided for UE that does not support per-FR gap and in test 2 NCSG pattern configuration #2 as defined in Table A.6.6.19.1.2-2 is provided for UE that supports per-FR gap. If a UE supports per-FR gap, it is only required to pass test 2. Otherwise it is only required to pass test 1.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

Table A.6.6.19.1.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.6.6.19.1.2-2: General test parameters for SA intra-frequency event triggered reporting with per-UE gaps for PCell in FR1

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
Active cell		1, 2, 3	Cell 1		
Neighbour cell		1, 2, 3	Cell 2		Cell to be identified.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2		
NCSG type		1, 2, 3	Per-UE	Per-FR	Per-FR NCSG pattern is configured if UE support per-FR NCSG; otherwise, per-UE NCSG patter is configured.
NCSG pattern		1, 2, 3	0	2	
Visible interruption repetition periodicity	ms	1, 2, 3	40	40	
Measurement length	ms	1, 2, 3	5	2	
NCSG offset	ms	1, 2, 3	39	39	
SSB configuration		1	SSB.1 FR1		
		2	SSB.1 FR1		
		3	SSB.2 FR1		
SMTC configuration		1	SMTC.2		
		2	SMTC.1		
		3	SMTC.1		
CSI-RS parameters		1	CSI-RS.1.2 FDD resource #0		
		2	CSI-RS.1.2 TDD resource #0		
		3	CSI-RS.2.2 TDD resource #0		
A3-Offset	dB	1, 2, 3	-4.5		
CP length		1, 2, 3	Normal		
Hysteresis	dB	1, 2, 3	0		
Time To Trigger	s	1, 2, 3	0		
Filter coefficient		1, 2, 3	0		L3 filtering is not used
DRX	ms	1, 2, 3			OFF
Time offset between serving and neighbour cells		1	3 ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 μs		Synchronous cells

		3	3 μs	Synchronous cells
T1	s	1, 2, 3	5	
T2	s	1, 2, 3	1	

Table A.6.6.19.1.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting with NCSG for PCell in FR1

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD		N/A	
		3	CR.2.1 TDD		N/A	
Dedicated CORESET RMC configuration		1	CCR.1.2 FDD		N/A	
		2	CCR.1.2 TDD		N/A	
		3	CCR.2.1 TDD		N/A	
OCNG Patterns		1, 2, 3	OP.1		OP.1	
TRS configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD		N/A	
		3	TRS.1.2 TDD		N/A	
IInitial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3	DLBWP.1.2		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3	ULBWP.1.2		ULBWP.1.1	
RLM-RS		1, 2, 3	CSI-RS		SSB	
N_{oc} Note 2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1	-98			
		2				
		3				
$\hat{E}_s/I_{ot}$	dB	1	4	-1.46	-Infinity	-1.46
		2				
		3				
$\hat{E}_s/N_{oc}$	dB	1	4	4	-Infinity	4
		2				
		3				
SS-RSRP Note 3	dBm/SCS kHz	1	-94	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1	-64.60	-62.25	--64.60	-62.25
	dBm/9.36 MHz	2	-64.60	-62.25	--64.60	-62.25

	dBm/38.16 MHz	3	-58.50	-56.16	--58.50	-56.16
Propagation Condition		1, 2, 3	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.6.19.1.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 800 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

During T2, UE shall send HARQ ACK/NACK for the corresponding PDSCH scheduled in PCell in all the slots except for the case where PDSCH or PUCCH is overlapped with the VIL of NCSG pattern.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.19.2 SA event triggered reporting tests for FR1 with NCSG for inter-frequency measurement

A.6.6.19.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.10.

The serving frequency and the target frequency should be selected such that UE reports ‘ncsg’ for the target frequency given the serving frequency.

A.6.6.19.2.2 Test parameters

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. NR RF channel 1 and NR RF channel 2 should be selected such that UE reports ‘ncsg’ for the target frequency on NR RF channel 2.

The test parameters are given in Tables A.6.6.19.2.2-1, A.6.6.19.2.2-2 and A.6.6.19.2.2-3.

In test 1 measurement NCSG pattern configuration # 0 as defined in Table A.6.6.19.2.2-2 is provided for UE that does not support per-FR NCSG, and in test 2 NCSG pattern configuration #2 as defined in Table A.6.6.19.2.2-2 is provided for UE that supports per-FR NCSG. If a UE supports per-FR NCSG, it is only required to pass test 2, otherwise it is only required to pass test 1.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

During T2, the UE is continuously scheduled with data on the PCell.

Table A.6.6.19.2.2-1: SA event triggered reporting tests for FR1 with NCSG for inter-frequency measurement

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.6.6.19.2.2-2: General test parameters for event triggered reporting for FR1 with NCSG for inter-frequency measurement

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1,2,3	1, 2		Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cell2		NR cell 2 is on NR RF channel number 2.
NCSG Pattern Id		Config 1,2,3	0	2	As specified in Table 9.1.9.3-1.
NCSG offset		Config 1,2,3	9		
SMTC-SSB parameters		Config 1	SSB.1 FR1		As specified in clause A.3.10.1
		Config 2	SSB.1 FR1		As specified in clause A.3.10.1
		Config 3	SSB.2 FR1		As specified in clause A.3.10.1
A3-Offset	dB	Config 1,2,3	-6		
Hysteresis	dB	Config 1,2,3	0		
CP length		Config 1,2,3	Normal		
TimeToTrigger	s	Config 1,2,3	0		
Filter coefficient		Config 1,2,3	0		L3 filtering is not used
DRX		Config 1,2,3	OFF		DRX is not used
Time offset between serving and neighbour cells		Config 1	3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs		Synchronous cells.
T1	s	Config 1,2,3	5		
T2	s	Config 1,2,3	1		

Table A.6.6.19.2.2-3: Cell specific test parameters for SA event triggered reporting for FR1 with NCSG for inter-frequency measurement

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number		Config 1,2,3	1		2	

Duplex mode			Config 1	FDD	
			Config 2,3	TDD	
TDD configuration			Config 1	Not Applicable	
			Config 2	TDDConf.1.1	
			Config 3	TDDConf.2.1	
$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c}$ = 52	
			Config 3	40: $N_{RB,c}$ = 106	
BWP BW		MHz	Config 1,2	10: $N_{RB,c}$ = 52	
			Config 3	40: $N_{RB,c}$ = 106	
BWP configuration	Initial DL BWP		Config 1, 2, 3	DLBWP.0.1	NA
	Initial UL BWP			ULBWP.0.1	NA
	Dedicated DL BWP			DLBWP.1.1	NA
	Dedicated UL BWP			ULBWP.1.1	NA
TRS configuration			Config 1	TRS.1.1 FDD	NA
			Config 2	TRS.1.1 TDD	NA
			Config 3	TRS.1.2 TDD	NA
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1	OP.1
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD	
			Config 2	SR.1.1 TDD	
			Config 3	SR2.1 TDD	
RMSI CORESET Reference Channel			Config 1	CR.1.1 FDD	
			Config 2	CR.1.1 TDD	
			Config 3	CR2.1 TDD	
Dedicated CORESET Reference Channel			Config 1	CCR.1.1 FDD	
			Config 2	CCR.1.1 TDD	
			Config 3	CCR.2.1 TDD	
SSB parameters			Config 1	SSB.1 FR1	SSB.5 FR1
			Config 2	SSB.1 FR1	SSB.5 FR1
			Config 3	SSB.2 FR1	SSB.6 FR1
SMTC configuration defined in A.3.11			Config 1	SMTC.2	SMTC.5
			Config 2, 3	SMTC.1	SMTC.4
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	15	
			Config 3	30	
EPRE ratio of PSS to SSS			Config 1,2,3	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					

N_{oc} Note2	dBm/15 kHz		-98		-98	
N_{oc} Note2	dBm/SCS	Config 1,2	-98		-98	
		Config 3	-95		-95	
SS-RSRP Note 3	dBm/SCS	Config 1,2	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3	4	4	-Infinity	7
Io Note3	dBm/9.36MHz	Config 1,2	-64.59	-64.59	-70.05	-62.26
	dBm/38.16MHz	Config 3	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.6.6.19.2.3 Test Requirements

In test 1 and 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

During T2, UE shall send HARQ-ACK for the corresponding PDSCH scheduled in PCell in all the slots except for the case where PDSCH or PUCCH is overlapped with the VIL of NCSG pattern.

The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2, the UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.19.3 SA NR - E-UTRAN event-triggered reporting in non-DRX in FR1 with NCSG

A.6.6.19.3.1 Test Purpose and Environment

The purpose of this set of tests is to verify that the UE makes correct event-triggered reporting of inter-RAT E-UTRAN measurements based on NCSG when operating in standalone (SA) operation with PCell in FR1. This test shall partly verify the cell search and measurement requirements in Clauses 9.4.2 and 9.4.3.

The serving frequency and the target frequency should be selected such that UE reports ‘ncsg’ for the target frequency given the serving frequency.

A.6.6.19.3.2 Test parameters

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the NR PCell and Cell 2 is an inter-RAT E-UTRAN inter-RAT neighbour cell. In the measurement control information from the PCell it is indictated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) is to be used. Each test consists of two consecutive time periods, with durations T1 and T2, respectively. Prior to the start of time duration T1, the UE shall be fully synchronized to Cell 1. During T1, the UE shall not have any information on Cell 2.

Supported test configurations are shown in table A.6.6.19.3.2-1. General test parameters are provided in Table A.6.6.19.3.2-2 below. Test parameters for Cell 1 and Cell 2, valid for both time duration T1 and T2, are provided in Tables A.6.6.19.3.2-3 and A.6.6.19.3.2-4, respectively.

Table A.6.6.19.3.2-1: Supported test configurations in SA inter-RAT E-UTRAN event triggered reporting in non-DRX with PCell in FR1

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.6.19.3.2-2: General test parameters for SA inter-RAT E-UTRAN event triggered reporting in non-DRX with PCell in FR1

Parameter	Unit	Value	Comment
NR RF Channel Number		1	1 NR carrier frequency is used in the test
LTE RF Channel Number		1	1 LTE carrier frequency is used in the test
Channel Bandwidth	MHz	As specified in Tables A.6.6.3.1.1-2 and A.6.6.3.1.1-3.	
Active cell		Cell 1	Cell 1 is on NR RF channel number 1
Neighbour cell		Cell 2	Cell 2 is on LTE RF channel number 2
NCSG Pattern Id		0	As specified in clause Table 9.1.9.3-1.
NCSG offset	ms	39	
NCSG mgta	ms	0	
NR measurement quantity		SS-RSRP	Measurement quantity for Cell 1
Inter-RAT E-UTRAN measurement quantity		RSRP	Measurement quantity for Cell 2
b2-Threshold1	dBm	As specified in Table A.6.3.1.4-3	SS-RSRP threshold for SS-RSRP measurement on cell1 for event B2
b2-Threshold2EUTRA	dBm	-95	E-UTRAN RSRP threshold for SS-RSRP measurement on cell1 for event B2
Hysteresis	dB	0	
TimeToTrigger	s	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	OFF
T1	s	5	
T2	s	5	
Note 1: Values are defined in Table A.6.6.3.1.1-3			

Table A.6.6.19.3.2-3: PCell specific test parameters for SA inter-RAT E-UTRA event triggered reporting in non-DRX with PCell in FR1

Parameter	Unit	Configuration	Cell 1

				T1	T2
RF channel number			1, 2, 3, 4, 5, 6	1	
Duplex mode			1, 2, 3	FDD	
			4, 5, 6	TDD	
TDD Configuration	SCS=15 KHz		2, 5	TDDConf.1.1	
	SCS=30 KHz		3, 6	TDDConf.2.1	
$BW_{channel}$		MHz	1, 4	10: $N_{RB,c}$ = 52 (FDD)	
			2, 5	10: $N_{RB,c}$ = 52 (TDD)	
			3, 6	40: $N_{RB,c}$ = 106 (TDD)	
PDSCH reference measurement channel			1, 4	SR.1.1 FDD	
			2, 5	SR.1.1 TDD	
			3, 6	SR.2.1 TDD	
RMSI CORSET reference channel			1, 4	CR.1.1 FDD	
			2, 5	CR.1.1 TDD	
			3, 6	CR.2.1 TDD	
Dedicated CORSET reference channel			1, 4	CCR.1.1 FDD	
			2, 5	CCR.1.1 TDD	
			3, 6	CCR.2.1 TDD	
BWP configurations	Initial DL BWP		1, 2, 3, 4, 5, 6	DLBWP.0.1	
	Dedicated DL BWP		1, 2, 3, 4, 5, 6	DLBWP.1.1	
	Initial UL BWP		1, 2, 3, 4, 5, 6	ULBWP.0.1	
	Dedicated UL BWP		1, 2, 3, 4, 5, 6	ULBWP.1.1	
OCNG pattern[Note1]			1, 2, 3, 4, 5, 6	OP.1	
SMTC configuration			1, 2, 3, 4, 5, 6	SMTC.1	
SSB configuration			1, 2, 4, 5	SSB.1 FR1	
			3, 6	SSB.2 FR1	
CSI-RS for tracking			1, 4	TRS.1.1 FDD	
			2, 5	TRS.1.1 TDD	
			3, 6	TRS.1.2 TDD	
b2-Threshold1		dBm	1, 2, 4, 5	--96	
			3, 6	--93	
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4, 5, 6	0	
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS					
EPRE ratio of OCNG to OCNG DMRS					
N_{oc}[Note2]		dBm/15 KHz	1, 2, 3, 4, 5, 6	-104	
N_{oc}[Note2]		dBm/SCS	1, 2, 4, 5	-104	
			3, 6	-101	
$\hat{E}_s/N_{oc}$		dB	1, 2, 3, 4, 5, 6	116	70
$\hat{E}_s/I_{ot}$[Note3]		dB	1, 2, 3, 4, 5, 6	116	70
SS-RSRP[Note3]		dBm/SCS	1, 2, 4, 5	--88	--104
			3, 6	--85	--101
SSB_RP[Note3]		dBm/SCS	1, 2, 4, 5	--88	--104
			3, 6	--85	--101
Io[Note3]		dBm/9.36 MHz	1, 2, 4, 5	--59.94	--73.04
		dBm/38.16 MHz	3, 6	--53.84	--66.93

Propagation condition		1, 2, 3, 4, 5, 6	TDL-C 300ns 100Hz
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x2 Low
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			

Table A.6.6.19.3.2-4: E-UTRAN neighbour cell specific test parameters for SA inter-RAT E-UTRAN event triggered reporting in non-DRX with PCell in FR1

Parameter	Unit	Configuration	Cell 2	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6	1	
Duplex mode		1, 2, 3	FDD	
		4, 5, 6	TDD	
TDD special subframe configuration[Note1]		4, 5, 6	6	
TDD uplink-downlink configuration[Note1]		4, 5, 6	1	
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]		1, 2, 3	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note3]				
OCNG_RB[Note3]				

N_{oc} Note4	dBm/15kHz	1, 2, 3, 4, 5, 6	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	-Infinity	17
$\hat{E}_s/I_{ot}$ Note5	dB	1, 2, 3, 4, 5, 6	-Infinity	17
RSRP Note5	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-87
SCH_RP Note5	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-87
Io Note5	dBm/9MHz	1, 2, 3, 4, 5, 6	-76.22+10log ($N_{RB,c}$ /50)	-59.13+10log ($N_{RB,c}$ /50)
Propagation Condition		1, 2, 3, 4, 5, 6	ETU70	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x2 Low	
Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].				
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.				
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

A.6.6.19.3.3 Test Requirements

The UE shall send one Event B2 triggered measurement report for Cell 2 to the PCell, with a measurement reporting delay less than 3.84s from the start of period T2. The measurement reporting delay is defined as the time from the beginning of time period T2 to the moment when the UE sends the measurement report on PUSCH.

The UE shall not send event-triggered measurement reports as long as the reporting criteria is not fulfilled.

During T2, UE shall send HARQ-ACK for the corresponding PDSCH scheduled in PCell in all the slots except for the case where PDSCH or PUCCH is overlapped with the VIL of NCSG pattern.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.19.4 Event triggered reporting on SCC with deactivated SCell test with per-UE NCSG under non-DRX

A.6.6.19.4.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the cell search requirements on SCC with deactivated SCell in clauses 9.2.7.1 and 9.2.7.2.

A.6.6.19.4.2 Test parameters

Three cells are deployed in the test, which are FR1 PCell (Cell 1), FR1 SCell (Cell 2) and FR1 neighbour cell (Cell 3) on the same frequency as the SCell. The SCell is deactivated during the test. The test parameters for PCell, the SCell and the neighbour cell are given in Table A.6.6.19.4.2-1 and A.6.6.19.4.2-2 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A6 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 3. The PCell shall continuously scheduled with data in the DL starting from T1 until the UE has sent the measurement report during T2.

Table A.6.6.19.4.2-1: Supported test configurations

Configuration	Description

1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.6.6.19.4.2-2: General test parameters for event triggered reporting on SCC with deactivated SCell with per-UE NCSG for FR1

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3	Cell 1	
Configured deactivated SCell		1, 2, 3	Cell 2	
Neighbour cell		1, 2, 3	Cell 3	Cell to be identified.
RF Channel Number		1, 2, 3	1: Cell 1	
RF Channel Number		1, 2, 3	2: Cell 2 and Cell 3	
Measurement gap type		1, 2, 3	Per-UE NCSG	
NCSG pattern		1, 2, 3	ID # 0	Defined in Table 9.1.9.3-1
MGTA	ms	1, 2, 5	0	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
A6-Offset	dB	1, 2, 3	-4.5	
CP length		1, 2, 3	Normal	
Hysteresis	dB	1, 2, 3	0	
Time To Trigger	s	1, 2, 3	0	
Filter coefficient		1, 2, 3	0	L3 filtering is not used
DRX		1, 2, 3		OFF
SCell measurement cycle (measCycleSCell)	ms	1, 2, 3	160	
Cell 2 timing offset to Cell 1	µs	1, 2, 3	0	
Time alignment error between Cell 2 and Cell 1	µs	1, 2, 3	≤ Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
Cell 3 timing offset to Cell 1	µs	1, 2, 3	3	Synchronous cells
T1	s	1, 2, 3	5	
T2	s	1, 2, 3	5	

Table A.6.6.19.4.2-3: NR Cell specific test parameters for event triggered reporting on SCC with deactivated SCell with per-UE NCSG for FR1

Parameter	Unit	Test configuration	Cell 1		Cell 2		Cell 3	
			T1	T2	T1	T2	T1	T2
TDD configuration		1	N/A		N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A		N/A	
		2	SR.1.1 TDD					
		3	SR.2.1 TDD					
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A		N/A	
		2	CR.1.1 TDD		N/A		N/A	

		3	CR.2.1 TDD		N/A		N/A	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		N/A		N/A	
		2	CCR.1.1 TDD		N/A		N/A	
		3	CCR.2.1 TDD		N/A		N/A	
OCNG Patterns		1, 2, 3	OP.1		OP.1		OP.1	
TRS Configuration		1	TRS.1.1 FDD		TRS.1.1 FDD			
		2	TRS.1.1 TDD		TRS.1.1 TDD		N/A	
		3	TRS.1.2 TDD		TRS.1.2 TDD		N/A	
IInitial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1		N/A	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1		DLBWP.1.1		N/A	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1		ULBWP.1.1		N/A	
N_{oc} Note 2	dBm/SCS	1	-98					
		2	-98					
		3	-95					
N_{oc} Note 2	dBm/15 kHz	1, 2, 3	-98					
$\hat{E}_s/I_{ot}$	dB	1, 2, 3	4	4	4	-1.46	-Infinity	-1.46
$\hat{E}_s/N_{oc}$	dB	1, 2, 3	4	4	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS kHz	1	-94	-94	-94	-94	-Infinity	-94
		2	-94	-94	-94	-94	-Infinity	-94
		3	-91	-91	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1	-64.60	-64.60	-64.60	-62.25	-64.60	-62.25
	dBm/9.36 MHz	2	-64.60	-64.60	-64.60	-62.25	-64.60	-62.25
	dBm/38.16 MHz	3	-58.50	-58.50	-58.50	-56.16	-58.50	-56.16
Propagation Condition		1, 2, 3	AWGN					

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.6.19.4.3 Test Requirements

The UE shall send one Event A6 triggered measurement report, with a measurement reporting delay less than 1600 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall be scheduled on PCell continuously throughout the test. From the start of T1 until the measurement report is received during T2, at least 100% of all expected ACK/NACKs shall be transmitted by the UE.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

For a test to be considered successful requirements on both Event A6 detection and percentage of transmitted ACK/NACKs have to be fulfilled simultaneously.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.20 UE Rx-Tx time difference measurement for propagation delay compensation

A.6.6.20.1 Test purpose and environment

The purpose of the test is to verify that the UE Rx-Tx measurement for RTT-based PDC meets the requirements specified in clause 9.12.4.1 for measurement delay and clause 10.1.X for measurement accuracy in AWGN propagation condition in FR1 in standalone scenario.

The supported test configurations in listed in Table A.6.6.20.1-1.

Table A.6.6.20.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

The test is considered with one cell (Cell 1) in FR1.

The test consists of two consecutive time intervals, with duration of T1 and T2. If the test is based on PRS, the Cell 1 mutes PRS transmission during T1 and transmits PRS during T2.

If the test is based on PRS, the *MeasObjectRxTxDiff-r17* with *prs-Ref-r17* , *measObject* with *measObjectRxTxDiff-17,* and *NR-DL-PRS-PDC-Info as defined in TS 38.331* shall be provided to the UE during T1.

The last TTI containing the RRC configuration shall be provided to the UE ΔT ms before the start of T2, where ΔT = [TBD] ms.

The beginning of the time interval T2 shall be aligned with the beginning of the first PRS resources.

The UE is configured to transmit SRS during T2.

The general test parameters and cell specific test parameters are as given in Table A.6.6.20.1-2. The test parameters for PRS are given Table A.6.6.20.1-3.

Table A.6.6.20.1-2: General test parameters

Parameter	Unit	Test configuration	Value
Active cell		1, 2, 3	Cell 1
RF Channel Number		1, 2, 3	1
$BW_{channel}$	MHz	1	10: $N_{RB,c}$ = 52
		2	10: $N_{RB,c}$ = 52
		3	40: $N_{RB,c}$ = 106
SSB configuration		1	SSB.1 FR1
		2	SSB.1 FR1
		3	SSB.2 FR1
SMTC configuration		1	SMTC.2
		2	SMTC.1
		3	SMTC.1
CP length		1, 2, 3	Normal
DRX		1, 2, 3	OFF
T1	s	1, 2, 3	5

T2	s	1, 2, 3	10

Table A.6.6.20.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1	
			T1	T2
TDD configuration		1	N/A	
		2	TDDConf.1.1	
		3	TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD	
		2	SR.1.1 TDD	
		3	SR.2.1 TDD	
RMSI CORESET RMC configuration		1	CR.1.1 FDD	
		2	CR.1.1 TDD	
		3	CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD	
		2	CCR.1.1 TDD	
		3	CCR.2.1 TDD	
OCNG Patterns		1, 2, 3	OP.1	
TRS Configuration		1	TRS.1.1 FDD	
		2	TRS.1.1 TDD	
		3	TRS.1.2 TDD	
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1	
PRS configuration		1	PRS.1.2 FR1	
		2	PRS.1.2 FR1	
		3	PRS.2.2 FR1	
PRS muting info		1, 2, 3	'10'	
SRS configuration		1	[PDC-SRS.1]	
		2	[PDC-SRS.1]	
		3	[PDC-SRS.2]	
N_{oc} Note 2	dBm/SCS	1	-98	
		2	-98	
		3	-95	
N_{oc} Note 2	dBm/15 kHz	1	-98	
		2	-98	
		3	-98	
PRS $\hat{E}_s / I_{ot}$	dB	1	-Infinity	-2.41
		2		
		3		
PRS $\hat{E}_s / N_{oc}$	dB	1	-Infinity	-2
		2		
		3		
PRS-RSRP Note 3	dBm/SCS kHz	1	-Infinity	-100
		2	-Infinity	-100
		3	-Infinity	-97
Io	dBm/9.36 MHz	1	N/A	-67.67
	dBm/9.36 MHz	2		-67.67
	dBm/38.16 MHz	3		-61.57
Propagation Condition		1, 2, 3	AWGN	

Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2:	The noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	PRS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.6.20.2 Test requirements

If the test is based on PRS, the UE Rx-Tx time difference measurement time fulfils the requirements specified in 9.12.4.1.

The UE shall perform and report the UE Rx-Tx time difference measurements for Cell 1 within the specified UE Rx-Tx time difference measurement time starting from the beginning of time interval T2.

The reported UE Rx-Tx measurement for each correct event shall be within the UE Rx-Tx reporting range specified in clause [10.1.25.3.1].

The UE Rx-Tx time difference measurement time fulfils the UE Rx-Tx measurement accuracy requirements specified in clause [TBD] for Cell 1.

A.6.6.21 UE Rx-Tx time difference measurement with TRS for RTT-based PDC in FR1 SA

A.6.6.21.1 Test purpose and environment

The purpose of the test is to verify that the UE Rx-Tx measurement with TRS for RTT-based PDC meets the requirements specified in clause 9.12.4.2 for measurement delay and clause 10.1.X.2 for measurement accuracy in AWGN propagation condition in FR1 in standalone scenario.

The supported test configurations in listed in Table A.6.6.21.1-1.

Table A.6.6.21.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There is a single cell in the test: PCell (Cell 1) on RF channel 1 in FR1.

The test consists of two consecutive time intervals, with duration of T1 and T2. Cell 1 does not have TRS transmission during T1 and transmits TRS during T2.

The measurement control information with *MeasObjectRxTxDiff* set to ‘csi-RS-Ref’ as defined in TS 38.331 [2], shall be provided to the UE during T1. The last TTI containing the RRC message shall be provided to the UE ΔT ms before the start of T2, where ΔT = 10 ms is the maximum processing time of the measurement request.

The UE is configured to transmit SRS during T2.

The general test parameters and cell specific test parameters are as given in Table A.6.6.21.1-2 and Table A.6.6.21.1-3 respectively. The test consists two sub-tests with different TRS BW.

Table A.6.6.21.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3	Cell 1	Cell 1 is the PCell
RF Channel Number		1, 2, 3	1	
$BW_{channel}$	MHz	1	10: $N_{RB,c}$ = 52	
		2	10: $N_{RB,c}$ = 52	
		3	40: $N_{RB,c}$ = 106	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
CP length		1, 2, 3	Normal	
DRX		1, 2, 3	OFF	
T1	s	1, 2, 3	1	
T2	s	1, 2, 3	1	

Table A.6.6.21.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Values	
			T1	T2
TDD configuration		1	N/A	
		2	TDDConf.1.1	
		3	TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD	
		2	SR.1.1 TDD	
		3	SR.2.1 TDD	
RMSI CORESET RMC configuration		1	CR.1.1 FDD	
		2	CR.1.1 TDD	
		3	CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD	
		2	CCR.1.1 TDD	
		3	CCR.2.1 TDD	
OCNG Patterns		1, 2, 3	OP.1	
TRS Configuration		1	TRS.1.1 FDD	
		2	TRS.1.1 TDD	
		3	TRS.1.2 TDD	
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1	
SRS configuration		1	[PDC-SRS.1]	
		2	[PDC-SRS.1]	
		3	[PDC-SRS.2]	
N_{oc} Note 2	dBm/SCS	1	-98	
		2	-98	
		3	-95	
N_{oc} Note 2	dBm/15 kHz	1	-98	
		2		
		3		
TRS $\hat{E}_s / I_{ot}$	dB	1	-Infinity	-3
		2		
		3		
	dB	1	-Infinity	-3

TRS $\hat{E}_s/N_{oc}$		2		
		3		
TRS-RSRP Note 3	dBm/SCS kHz	1	-Infinity	-101
		2	-Infinity	-101
		3	-Infinity	-98
Io	dBm/9.36 MHz	1	N/A	-68.28
	dBm/9.36 MHz	2		-68.28
	dBm/38.16 MHz	3		-62.19
Propagation Condition		1, 2, 3	AWGN	

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: TRS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.6.21.2 Test requirements

The UE Rx-Tx time difference measurement time fulfils the requirements specified in clause 9.12.4.2. The UE shall be able to report the first Rx-Tx time difference measurement results no later than TBD ms from the beginning of T2.

The UE Rx-Tx time difference measurement time fulfils the UE Rx-Tx measurement accuracy requirements specified in clause 10.1.X.2.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%.

A.6.7 Measurement Performance requirements

Unless explicitly stated otherwise:

- Reported measurements shall be within defined range of accuracy limits defined in Clause 10 for at least 90 % of the reported cases. If multiple measurement performance requirements are verified in the same test, the reported measurements for each requirement shall be within defined range of accuracy limits of the corresponding requirement defined in Clause 10 for at least 90% of the reported cases.
- Measurements are performed in RRC_CONNECTED state.
- The reference channels assume transmission of PDSCH with a maximum number of 5 HARQ transmissions unless otherwise specified.

A.6.7.1 SS-RSRP

A.6.7.1.1 SA: intra-frequency case measurement accuracy with FR1 serving cell and FR1 target cell

A.6.7.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1.2.1.1 and 10.1.2.1.2 for intra-frequency measurements.

A.6.7.1.1.2 Test parameters

In this set of test cases all cells are on the same carrier frequency. Supported test configurations are shown in table A.6.7.1.1.2-1. Both absolute and relative accuracy of SS-RSRP intra-frequency measurements are tested by using the parameters in A.6.7.1.1.2-2. In all test cases, Cell 1 is the PCell, and Cell 2 is the target cell.

Table A.6.7.1.1.2-1: SS-RSRP Intra frequency SS-RSRP supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table A.6.7.1.1.2-2: SS-RSRP Intra frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
Cell ID			489	0	489	0	489	0
SSB ARFCN			freq1		freq1		freq1	
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
TDD configuration	Config 1		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52					
	Config 2		10: $N_{RB,c}$ = 52					
	Config 3		40: $N_{RB,c}$ = 106					
BWP BW	Config 1		10: $N_{RB,c}$ = 52					
	Config 2		10: $N_{RB,c}$ = 52					
	Config 3		40: $N_{RB,c}$ = 106					
Downlink initial BWP configuration			DLBWP.0.1					
Downlink dedicated BWP configuration			DLBWP.1.1					
Uplink initial BWP configuration			ULBWP.0.1					
Uplink dedicated BWP configuration			ULBWP.1.1					
TRS configuration	Config 1		TRS.1.1 FDD	NA	TRS.1.1 FDD	NA	TRS.1.1 FDD	NA
	Config 2		TRS.1.1 TDD	NA	TRS.1.1 TDD	NA	TRS.1.1 TDD	NA
	Config 3		TRS.1.2 TDD	NA	TRS.1.2 TDD	NA	TRS.1.2 TDD	NA
DRX Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3		SR2.1 TDD		SR2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	-
	Config 2		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
	Config 3		CR2.1 TDD		CR2.1 TDD		CR2.1 TDD	
Control channel RMC	Config 1		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-

	Config 2		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3		CCR2.1 TDD		CCR2.1 TDD		CCR2.1 TDD	
SSB configuration	Config 1		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
	Config 2		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
	Config 3		SSB.2 FR1	SSB.2 FR1	SSB.2 FR1	SSB.2 FR1	SSB.2 FR1	SSB.2 FR1
Time offset with Cell 1	Config 1	ms	-	3	-	3	-	3
	Config 2,3	μs	-	3	-	3	-	3
SMTC configuration	Config 1		SMTC.2					
	Config 2,3		SMTC.1					
OCNG Patterns			OCNG pattern 1					
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz					
	Config 3		30kHz					
EPRE ratio of PSS to SSS		dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} Note2	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/15KhZ	-106		-88		-114
		NR_FDD_FR1_B						-113.5
		NR_TDD_FR1_C						-113
		NR_FDD_FR1_D, NR_TDD_FR1_D						-112.5
		NR_FDD_FR1_E, NR_TDD_FR1_E						-112
		NR_FDD_FR1_F						-111.5
		NR_FDD_FR1_G						-111
		NR_FDD_FR1_H						-110.5
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		Not applicable Note 5		-94		-114
		NR_FDD_FR1_B						-113.5
		NR_TDD_FR1_C						-113
		NR_FDD_FR1_D, NR_TDD_FR1_D						-112.5
		NR_FDD_FR1_E, NR_TDD_FR1_E						-112
		NR_FDD_FR1_F						-111.5
		NR_FDD_FR1_G						-111
		NR_FDD_FR1_H						-110.5
N_{oc} Note2	Config 1,2		dBm/SCS	-106		-88		Same as Noc/15kHz
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		Not applicable Note 5		-91		-111
		NR_FDD_FR1_B						-110.5

		NR_TDD_FR1_C						-110	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-109.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-109	
		NR_FDD_FR1_F						-108.5	
		NR_FDD_FR1_G						-108	
		NR_FDD_FR1_H						-107.5	
$\hat{E}_s/I_{ot}$			dB	2.46	-5.97	2.46	-5.97	-0.01	-4.76
$\hat{E}_s/N_{oc}$			dB	6	1	6	1	3	0
SS-RSRP[Note3]	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/SCS	-100	-105	-82	-87	-111.00	-114.00
		NR_FDD_FR1_B						-110.50	-113.50
		NR_TDD_FR1_C						-110.00	-113.00
		NR_FDD_FR1_D, NR_TDD_FR1_D						-109.50	-112.50
		NR_FDD_FR1_E, NR_TDD_FR1_E						-109.00	-112.00
		NR_FDD_FR1_F						-108.50	-111.50
		NR_FDD_FR1_G						-108.00	-111.00
		NR_FDD_FR1_H						-107.50	-110.50
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		Not applicable[Note 5]	Not applicable[Note 5]	-85	-90	-108.00	-111.00
		NR_FDD_FR1_B						-107.50	-110.50
		NR_TDD_FR1_C						-107.00	-110.00
		NR_FDD_FR1_D, NR_TDD_FR1_D						-106.50	-109.50
		NR_FDD_FR1_E, NR_TDD_FR1_E						-106.00	-109.00
		NR_FDD_FR1_F						-105.50	-108.50
		NR_FDD_FR1_G						-105.00	-108.00
		NR_FDD_FR1_H						-104.50	-107.50
Io[Note3]	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 9.36MHz	-70.09		-52.09		-80.03	
		NR_FDD_FR1_B						-79.53	
		NR_TDD_FR1_C						-79.03	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-78.53	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-78.03	
		NR_FDD_FR1_F						-77.53	
		NR_FDD_FR1_G						-77.03	
		NR_FDD_FR1_H						-76.53	

	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 38.16MHz	Not applicable Note 5 -	-51.99	-73.94
		NR_FDD_FR1_B				-73.44
		NR_TDD_FR1_C				-72.94
		NR_FDD_FR1_D, NR_TDD_FR1_D				-72.44
		NR_FDD_FR1_E, NR_TDD_FR1_E				-71.94
		NR_FDD_FR1_F				-71.44
		NR_FDD_FR1_G				-70.94
		NR_FDD_FR1_H				-70.44
Propagation condition			-	AWGN		
Antenna configuration				1x2		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: Subtest 1 is not used when testing with 30kHz SSB SCS.
Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification

A.6.7.1.1.3 Test Requirements

The SS-RSRP measurement accuracy for cell 1 and cell 2 shall fulfil absolute requirement in clause 10.1.2.1.1 and relative requirement in clause 10.1.2.1.2.

A.6.7.1.2 SA inter-frequency case measurement accuracy with FR1 serving cell and FR1 target cell

A.6.7.1.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1.4.1.1 and 10.1.4.1.2 for inter-frequency measurements with the testing configurations for NR cells in Table A.6.7.1.2.1-1.

Table A.6.7.1.2.1-1: Applicable NR configurations for FR1 inter-frequency SS-RSRP accuracy test

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.6.7.1.2.2 Test parameters

In this set of test cases there are two cells in the test, PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on a different frequency than the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.6.7.1.2.2-1 below. Both absolute and relative accuracy of RSRP inter-frequency measurements are tested by using the parameters in Table A.6.7.1.2.2-1. The inter-frequency measurements are supported by a measurement gap.

Table A.6.7.1.2.2-1: SS-RSRP inter-frequency test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN	1~3		freq1	freq2	freq1	freq2
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
	2		10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
	3		40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
Duplex mode	1		FDD		FDD	
	2		TDD		TDD	
	3		TDD		TDD	
TDD configuration	1		N/A		N/A	
	2		TDDConf.1.1		TDDConf.1.1	
	3		TDDConf.2.1		TDDConf.2.1	
PDSCH Reference measurement channel	1		SR.1.1 FDD	-	SR.1.1 FDD	-
	2		SR.1.1 TDD		SR.1.1 TDD	
	3		SR.2.1 FDD		SR.2.1 FDD	
RMSI CORESET Reference Channel	1		CR.1.1 FDD	-	CR.1.1 FDD	-
	2		CR.1.1 TDD	-	CR.1.1 TDD	-
	3		CR.2.1 FDD	-	CR.2.1 FDD	-
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	2		CCR.1.1 TDD	-	CCR.1.1 TDD	-
	3		CCR.2.1 TDD	-	CCR.2.1 TDD	-
SSB configuration	1		SSB.1 FR1		SSB.1 FR1	
	2		SSB.1 FR1		SSB.1 FR1	
	3		SSB.2 FR1		SSB.2 FR1	
OCNG Patterns	1~3		OP.1		OP.1	
TRS configuration	1		TRS.1.1 FDD	-	TRS.1.1 FDD	
	2		TRS.1.1 TDD		TRS.1.1 TDD	
	3		TRS.1.2 TDD		TRS.1.2 TDD	
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1		DLBWP.1.1 ULBWP.1.1	
Time offset with Cell 1	1	ms	-	3	-	3
	2,3	µs	-	3	-	3
SMTC configuration	1		SMTC.2		SMTC.2	
	2,3		SMTC.1		SMTC.1	
EPRE ratio of PSS to SSS	1~3	dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS Note 1						
EPRE ratio of OCNG to OCNG DMRS Note 1						

N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1~3	dBm/15 kHz	-94.65	(N_{oc} for Channel 2 +8dB)	-115
	NR_FDD_FR1_B					-114.5
	NR_TDD_FR1_C					-114
	NR_FDD_FR1_D, NR_TDD_FR1_D					-113.5
	NR_FDD_FR1_E, NR_TDD_FR1_E					-113
	NR_FDD_FR1_F					-112.5
	NR_FDD_FR1_G					-112
	NR_FDD_FR1_H					-111.5
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5,	1,2	dBm/SSB SCS	-94.65	(N_{oc} for Channel 2 +8dB)	-115
	NR_FDD_FR1_B					-114.5
	NR_TDD_FR1_C					-114
	NR_FDD_FR1_D, NR_TDD_FR1_D					-113.5
	NR_FDD_FR1_E, NR_TDD_FR1_E					-113
	NR_FDD_FR1_F					-112.5
	NR_FDD_FR1_G					-112
	NR_FDD_FR1_H					-111.5
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5,	3		-91.65	(N_{oc} for Channel 2 +8dB)	-112.00
	NR_FDD_FR1_B					-111.50
	NR_TDD_FR1_C					-111.00
	NR_FDD_FR1_D, NR_TDD_FR1_D					-110.50
	NR_FDD_FR1_E, NR_TDD_FR1_E					-110.00
	NR_FDD_FR1_F					-109.50
	NR_FDD_FR1_G					-109.00
	NR_FDD_FR1_H					-108.50
$\hat{E}_s/I_{ot}$		1~3	dB	10 10	13	-3
SS-RSRP Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5,	1,2	dBm/SCS	-84.65	(RSRP for Cell 2 +25dB)	-118.00
	NR_FDD_FR1_B					-117.50
	NR_TDD_FR1_C					-117.00
	NR_FDD_FR1_D, NR_TDD_FR1_D					-116.50
	NR_FDD_FR1_E, NR_TDD_FR1_E					-116.00
	NR_FDD_FR1_F					-115.50
	NR_FDD_FR1_G					-115.00
	NR_FDD_FR1_H					-114.50
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5,	3		-81.65	(RSRP for Cell 2 +25dB)	-115.00
	NR_FDD_FR1_B					-114.50
	NR_TDD_FR1_C					-114.00
	NR_FDD_FR1_D, NR_TDD_FR1_D					-113.50
	NR_FDD_FR1_E, NR_TDD_FR1_E					-113.00
	NR_FDD_FR1_F					-112.50
	NR_FDD_FR1_G					-112.00
	NR_FDD_FR1_H					-111.50

Io[Note3]	NR_FDD_FR1_A, NR_TDD_FR1_A [NOTE 5],	1,2	dBm/ 9.36MHz	-56.28		(Io for Channel 2 +19.75dB)	-85.28
	NR_FDD_FR1_B						-84.78
	NR_TDD_FR1_C						-84.28
	NR_FDD_FR1_D, NR_TDD_FR1_D						-83.78
	NR_FDD_FR1_E, NR_TDD_FR1_E						-83.28
	NR_FDD_FR1_F						-82.78
	NR_FDD_FR1_G						-82.28
	NR_FDD_FR1_H						-81.78
	NR_FDD_FR1_A, NR_TDD_FR1_A [NOTE 5],	3	dBm/ 38.16MHz	-50.19		(Io for Channel 2 +19.75dB)	-79.19
	NR_FDD_FR1_B						-78.69
	NR_TDD_FR1_C						-78.19
	NR_FDD_FR1_D, NR_TDD_FR1_D						-77.69
	NR_FDD_FR1_E, NR_TDD_FR1_E						-77.19
	NR_FDD_FR1_F						-76.69
	NR_FDD_FR1_G						-76.19
	NR_FDD_FR1_H						-75.69
$\hat{E}_s / N_{oc}$		1~3	dB	10	10	13	-3
Propagation condition		1~3	-	AWGN		AWGN	
Antenna configuration		1~3		1x2		1x2	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

A.6.7.1.2.3 Test Requirements

The SS-RSRP measurement accuracy for Cell 1 and Cell 2 shall fulfil the absolute requirement in clause 10.1.4.1.1 and relative requirement in clause 10.1.4.1.2.

A.6.7.1.3 Void

A.6.7.2 SS-RSRQ

A.6.7.2.1 SA: Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.6.7.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.7.1.1.

A.6.7.2.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table A.6.7.2.1.2-1. The absolute accuracy of SS-RSRQ intra-frequency measurement is tested by using the parameters in Table A.6.7.2.1.2-2. In all test cases, Cell 1 is the PCell and Cell 2 is the target cell.

Table A.6.7.2.1.2-1: SS-RSRQ Intra frequency SS-RSRQ supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.7.2.1.2-2: SS-RSRQ Intra frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1		freq1		freq1	
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
TDD configuration	Config 1		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52					
	Config 2		10: $N_{RB,c}$ = 52					
	Config 3		40: $N_{RB,c}$ = 106					
Gap Pattern ID			0					
BWP configuration	Initial DL BWP		DLBWP.0.1					
	Dedicated DL BWP		DLBWP.1.1					
	Initial UL BWP		ULBWP.0.1					
	Dedicated UL BWP		ULBWP.1.1					
DRX Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3		SR2.1 TDD		SR2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	
	Config 2		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
	Config 3		CR.2.1 TDD		CR.2.1 TDD		CR.2.1 TDD	
Control Channel RMC	Config 1		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD		CCR.2.1 TDD		CCR.2.1 TDD	
TRS Configuration	Config 1		TRS.1.1 FDD	-	TRS.1.1 FDD	-	TRS.1.1 FDD	-
	Config 2		TRS.1.1 TDD		TRS.1.1 TDD		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD	
OCNG Patterns			OP. 1					
SS-RSSI-Measurement			Not Applicable					

Time offset with Cell 1	Config 1		ms	-	3	-	3	-	3
	Config 2,3		µs	-	3	-	3	-	3
SMTC configuration	Config 1			SMTC.2					
	Config 2,3			SMTC.1					
SSB configuration	Config 1,2			SSB.1 FR1					
	Config 3			SSB.2 FR1					
CSI-RS for tracking	Config 1			TRS.1.1 FDD					
	Config 2			TRS.1.1 TDD					
	Config 3			TRS.1.2 TDD					
PDSCH/PDCCH subcarrier spacing	Config 1,2		kHz	15 kHz					
	Config 3			30kHz					
EPRE ratio of PSS to SSS			dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/15kHz	-85		-101		-114	
		NR_FDD_FR1_B						-113.5	
		NR_TDD_FR1_C						-113	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-112.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-112	
		NR_FDD_FR1_F						-111.5	
		NR_FDD_FR1_G						-111	
		NR_FDD_FR1_H						-110.5	
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-91		-		-114	
		NR_FDD_FR1_B						-113.5	
		NR_TDD_FR1_C						-113	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-112.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-112	
		NR_FDD_FR1_F						-111.5	
		NR_FDD_FR1_G						-111	
		NR_FDD_FR1_H						-110.5	
N_{oc} Note2	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/SCS	-85		-101		-114 -113.5 -113	
		NR_FDD_FR1_B						-112.5	
		NR_TDD_FR1_C						-112	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-111.5 -111	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-110.5	
		NR_FDD_FR1_F							
		NR_FDD_FR1_G							
		NR_FDD_FR1_H							

	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-88		-		-111	
		NR_FDD_FR1_B						-110.5	
		NR_TDD_FR1_C						-110	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-109.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-109	
		NR_FDD_FR1_F						-108.5	
		NR_FDD_FR1_G						-108	
		NR_FDD_FR1_H						-107.5	
$\hat{E}_s/I_{ot}$			dB	-1.76		-4.7		-5..46	-5.46
$\hat{E}_s/N_{oc}$			dB	3	3	-2.9	-2.9	-4	-4
SS-RSRP Note 3	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/SCS	-82	-82	-103.9	-103.9	-118	-118
		NR_FDD_FR1_B						-117.5	-117.5
		NR_TDD_FR1_C						-117	-117
		NR_FDD_FR1_D, NR_TDD_FR1_D						-116.5	-116.5
		NR_FDD_FR1_E, NR_TDD_FR1_E						-116	-116
		NR_FDD_FR1_F						-115.5	-115.5
		NR_FDD_FR1_G						-115	-115
		NR_FDD_FR1_H						-114.5	-114.5
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-85	-85	-	-	-115	-115
		NR_FDD_FR1_B						-114.5	-114.5
		NR_TDD_FR1_C						-114	-114
		NR_FDD_FR1_D, NR_TDD_FR1_D						-113.5	-113.5
		NR_FDD_FR1_E, NR_TDD_FR1_E						-113	-113
		NR_FDD_FR1_F						-112.5	-112.5
		NR_FDD_FR1_G						-112	-112
		NR_FDD_FR1_H						-111.5	-111.5
SS-RSRQ Note3		NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dB	-14.77	-14.77	-16.76	-16.76	-17.34	-17.34
		NR_FDD_FR1_B							
		NR_TDD_FR1_C							
		NR_FDD_FR1_D, NR_TDD_FR1_D							
		NR_FDD_FR1_E, NR_TDD_FR1_E							
		NR_FDD_FR1_F							
		NR_FDD_FR1_G							
		NR_FDD_FR1_H							
Io Note3	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 9.36MHz	-50		-70		-83.5	
		NR_FDD_FR1_B						-83	
		NR_TDD_FR1_C						-82.5	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-82	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-81.5	

		NR_FDD_FR1_F						-81	
		NR_FDD_FR1_G						-80.5	
		NR_FDD_FR1_H						-80	
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 38.16MHz	-50		-		-77.4	
		NR_FDD_FR1_B						-76.9	
		NR_TDD_FR1_C						-76.4	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-75.9	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-75.4	
		NR_FDD_FR1_F						-74.9	
		NR_FDD_FR1_G						-74.4	
		NR_FDD_FR1_H						-73.9	
Propagation condition			-	AWGN	AWGN	AWGN	AWGN	AWGN	AWGN
Antenna configuration				1x2	1x2	1x2	1x2	1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRQ, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: NR operating band groups are as defined in clause 3.5.2.
Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

A.6.7.2.1.3 Test Requirements

The SS-RSRQ measurement accuracy shall fulfil the requirements in clause 10.1.7.1.1.

A.6.7.2.2 SA Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.6.7.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.9.1.1 and 10.1.9.1.2.

A.6.7.2.2.2 Test Parameters

In this test case the two cells (i.e., Cell 1 and Cell 2) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.6.7.2.2.2-1. Both absolute accuracy and relative accuracy requirements of SS-RSRQ inter-frequency measurement are tested by using test parameters in Table A.6.7.2.2.2-2. In all test cases, Cell 1 is the PCell and Cell 2 is target cell.

Table A.6.7.2.2.2-1: SS-RSRQ Inter frequency SS-RSRQ supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.7.2.2.2-2: SS-RSRQ Inter frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1	freq2	freq1	freq2	freq1	freq2
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
TDD configuration	Config 1		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52					
	Config 2		10: $N_{RB,c}$ = 52					
	Config 3		40: $N_{RB,c}$ = 106					
Gap pattern ID	Config 1,2,3		0					
BWP BW	Config 1		10: $N_{RB,c}$ = 52					
	Config 2		10: $N_{RB,c}$ = 52					
	Config 3		40: NRB,c = 106					
DRX Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2,5		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3,6		SR2.1 TDD		SR2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	-	R.1.1 FDD	-	CR.1.1 FDD	
	Config 2		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
	Config 3		CR2.1 TDD		CR2.1 TDD		CR2.1 TDD	
Dedicated CORESET Reference Channel	Config 1		CCR.1 .1 FDD	-	CCR.1. 1 FDD	-	CCR.1. 1 FDD	-
	Config 2		CCR.1 .1 TDD		CCR.1. 1 TDD		CCR.1. 1 TDD	
	Config 3		CCR2. 1 TDD		CCR2.1 TDD		CCR2. 1 TDD	
TRS Configuration	Config 1		TRS.1. 1 FDD	-	TRS.1.1 FDD	-	TRS.1. 1 FDD	-
	Config 2		TRS.1. 1 TDD		TRS.1.1 TDD		TRS.1. 1 TDD	
	Config 3		TRS.1. 2 TDD		TRS.1.2 TDD		TRS.1. 2 TDD	
OCNG Patterns			OCNG pattern 1					
Time offset with Cell 1	Config 1	ms	-	3	-	3	-	3
	Config 2,3	µs	-	3	-	3	-	3
SMTC configuration	Config 1		SMTC pattern 2					
	Config 2,3		SMTC pattern 1					
SSB configuration	Config 1,2		SSB pattern 1 in FR1					
	Config 3		SSB pattern 2 in FR1					
CSI-RS for tracking	Config 1		TRS.1.1 FDD					
	Config 2		TRS.1.1 TDD					
	Config 3		TRS.1.2 TDD					
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz					
	Config 3		30 kHz					
EPRE ratio of PSS to SSS		dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								

EPRE ratio of OCNG DMRS to SSS(Note 1) EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2	Config 1,2	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/15kHz	-80.18		-106		-116	
		NR_FDD_FR1_B						-115.5	
		NR_TDD_FR1_C						-115	
		NR_FDD_FR1_D NR_TDD_FR1_D						-114.5	
		NR_FDD_FR1_E NR_TDD_FR1_E						-114	
		NR_FDD_FR1_F						-113.5	
		NR_FDD_FR1_G						-113	
		NR_FDD_FR1_H						-112.5	
N_{oc} Note2	Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/15kHz	-86.27		-113		-116	
		NR_FDD_FR1_B						-115.5	
		NR_TDD_FR1_C						-115	
		NR_FDD_FR1_D NR_TDD_FR1_D						-114.5	
		NR_FDD_FR1_E NR_TDD_FR1_E						-114	
		NR_FDD_FR1_F						-113.5	
		NR_FDD_FR1_G						-113	
		NR_FDD_FR1_H						-112.5	
N_{oc} Note2	Config 1,2	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/15kHz	-80.18		-106		-116	
		NR_FDD_FR1_B						-115.5	
		NR_TDD_FR1_C						-115	
		NR_FDD_FR1_D NR_TDD_FR1_D						-114.5	
		NR_FDD_FR1_E NR_TDD_FR1_E						-114	
		NR_FDD_FR1_F						-113.5	
		NR_FDD_FR1_G						-113	
		NR_FDD_FR1_H						-112.5	
	Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6		-83.27		-110		-113	
		NR_FDD_FR1_B						-112.5	
		NR_TDD_FR1_C						-112	
		NR_FDD_FR1_D NR_TDD_FR1_D						-111.5	
		NR_FDD_FR1_E NR_TDD_FR1_E						-111	
		NR_FDD_FR1_F						-110.5	
		NR_FDD_FR1_G						-110	
		NR_FDD_FR1_H						-109.5	
$\hat{E}_s / I_{ot}$			dB	-1.75		-1.75		3	-1.75
$\hat{E}_s / N_{oc}$			dB	-1.75		-1.75		3	-1.75
SS-RSRP Note3	Config 1,2	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/SCS	-81.93	-81.93	-107.75	-107.75	-113	-117.75
		NR_FDD_FR1_B						-112.5	-117.25

		NR_TDD_FR1_C						-112	-116.75
		NR_FDD_FR1_D NR_TDD_FR1_D						-111.5	-116.25
		NR_FDD_FR1_E NR_TDD_FR1_E						-111	-115.75
		NR_FDD_FR1_F						-110.5	-115.2
		NR_FDD_FR1_G						-110	-114.75
		NR_FDD_FR1_H						-109.5	-114.25
	Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6		-85.02	-85.02	-111.75	-111.75	-110	-114.75
		NR_FDD_FR1_B						-109.5	-114.25
		NR_TDD_FR1_C						-109	-113.75
		NR_FDD_FR1_D NR_TDD_FR1_D						-108.5	-113.25
		NR_FDD_FR1_E NR_TDD_FR1_E						-108	-112.75
		NR_FDD_FR1_F						-107.5	-112.2
		NR_FDD_FR1_G						-107	-111.75
		NR_FDD_FR1_H						-106.5	-111.25
SS-RSRQ[Note3]		NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dB	-14.77	-14.77	-40.59	-40.59	12.56T	14.76T
		NR_FDD_FR1_B							
		NR_TDD_FR1_C							
		NR_FDD_FR1_D NR_TDD_FR1_D							
		NR_FDD_FR1_E NR_TDD_FR1_E							
		NR_FDD_FR1_F							
		NR_FDD_FR1_G							
		NR_FDD_FR1_H							
Io[Note3]	Config 1,2	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/SCS	-50		-75.83		-83.28	-85.83
		NR_FDD_FR1_B						-82.78	-85.33
		NR_TDD_FR1_C						-82.28	-84.83
		NR_FDD_FR1_D NR_TDD_FR1_D						-81.78	-84.33

		NR_FDD_FR1_E NR_TDD_FR1_E						-81.28	-83.83
		NR_FDD_FR1_F						-80.78	-83.33
		NR_FDD_FR1_G						-80.28	-82.83
		NR_FDD_FR1_H						-79.78	-82.33
	Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6		-50		-76.73		-77.19	-79.73
		NR_FDD_FR1_B						-76.69	-79.23
		NR_TDD_FR1_C						-76.19	-78.73
		NR_FDD_FR1_D NR_TDD_FR1_D						-75.69	-78.23
		NR_FDD_FR1_E NR_TDD_FR1_E						-75.19	-77.73
		NR_FDD_FR1_F						-74.69	-77.23
		NR_FDD_FR1_G						-74.19	-76.73
		NR_FDD_FR1_H						-73.69	-76.53
Propagation condition			-	AWGN	AWGN	AWGN	AWGN	AWGN	AWGN
Antenna configuration				1x2	1x2	1x2	1x2	1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRQ, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: NR operating band groups are as defined in clause 3.5.2.

Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

A.6.7.2.2.3 Test Requirements

The SS-RSRQ measurement accuracy shall fulfil the requirements in clause 10.1.9.1.1 and 10.1.9.1.2.

A.6.7.3 SS-SINR

A.6.7.3.1 SA intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.6.7.3.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.12.1.1.

A.6.7.3.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table A.6.7.3.1.2-1. The absolute accuracy of SS-SINR intra-frequency measurement is tested by using the parameters in Table A.6.7.3.1.2-2. In all test cases, Cell 1 is the PCell and Cell 2 is the target cell.

Table A.6.7.3.1.2-1: SS-SINR Intra frequency SS-SINR supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.7.3.1.2-2: SS-SINR Intra frequency test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1		freq1	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
Downlink initial BWP configuration			DLBWP.0.1			
Downlink dedicated BWP configuration			DLBWP.1.1			
Uplink initial BWP configuration			ULBWP.0.1			
Uplink dedicated BWP configuration			ULBWP.1.1			
DRX Cycle configuration		ms	Not Applicable			
TRS configuration	Config 1		TRS.1.1 FDD		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD		TRS.1.2 TDD	
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2		SR.1.1 TDD		SR.1.1 TDD	
	Config 3		SR.2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	-	CR.1.1 FDD	
	Config 2		CR.1.1 TDD		CR.1.1 TDD	
	Config 3		CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns			OP.1			
SS-RSSI-Measurement			Not Applicable			
SMTC configuration	Config 1		SMTC.2			

		Config 2,3		SMTC.1			
Time offset with Cell 1		Config 1	ms	-	3	-	3
		Config 2,3	µs	-	3	-	3
SSB configuration		Config 1,2		SSB.1 FR1			
		Config 3		SSB.2 FR1			
PDSCH/PDCCH subcarrier spacing		Config 1,2	kHz	15			
		Config 3		30			
EPRE ratio of PSS to SSS			dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/15kHz	-93		-116	
		NR_FDD_FR1_B				-115.5	
		NR_TDD_FR1_C				-115	
		NR_FDD_FR1_D, NR_TDD_FR1_D				-114.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E				-114	
		NR_FDD_FR1_F				-113.5	
		NR_FDD_FR1_G				-113	
		NR_FDD_FR1_H				-112.5	
N_{oc} Note2	Config 1,2		dBm/SCS	-93		Same as Noc for 15 kHz	
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-90		-113	
		NR_FDD_FR1_B				-112.5	
		NR_TDD_FR1_C				-112	
		NR_FDD_FR1_D, NR_TDD_FR1_D				-111.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E				-111	
		NR_FDD_FR1_F				-110.5	
		NR_FDD_FR1_G				-110	
		NR_FDD_FR1_H				-109.5	
$\hat{E}_s / I_{ot}$			dB	0	-3.19	-5.46	-5.46
$\hat{E}_s / N_{oc}$			dB	4.54	2.66	-4	-4
SS-RSRP Note3	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/SCS	-88.46	-90.34	-120	-120
		NR_FDD_FR1_B				-119.5	-119.5
		NR_TDD_FR1_C				-119	-119
		NR_FDD_FR1_D, NR_TDD_FR1_D				-118.5	-118.5
		NR_FDD_FR1_E, NR_TDD_FR1_E				-118	-118
		NR_FDD_FR1_F				-117.5	-117.5
		NR_FDD_FR1_G				-117	-117

		NR_FDD_FR1_H				-116.5	-116.5
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-85.46	-87.34	-117	-117
		NR_FDD_FR1_B				-116.5	-116.5
		NR_TDD_FR1_C				-116	-116
		NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5	-115.5
		NR_FDD_FR1_E, NR_TDD_FR1_E				-115	-115
		NR_FDD_FR1_F				-114.5	-114.5
		NR_FDD_FR1_G				-114	-114
		NR_FDD_FR1_H				-113.5	-113.5
SS-SINR Note3		NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dB	0	-3.19	-5.46	-5.46
		NR_FDD_FR1_B					
		NR_TDD_FR1_C					
		NR_FDD_FR1_D, NR_TDD_FR1_D					
		NR_FDD_FR1_E, NR_TDD_FR1_E					
		NR_FDD_FR1_F					
		NR_FDD_FR1_G					
		NR_FDD_FR1_H					
Io Note3	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 9.36MHz	-57.5		-85.51	
		NR_FDD_FR1_B				-85.01	
		NR_TDD_FR1_C				-84.51	
		NR_FDD_FR1_D, NR_TDD_FR1_D				-84.01	
		NR_FDD_FR1_E, NR_TDD_FR1_E				-83.51	
		NR_FDD_FR1_F				-83.01	
		NR_FDD_FR1_G				-82.51	
		NR_FDD_FR1_H				-82.01	
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 38.16MHz	-51.41		-79.41	
		NR_FDD_FR1_B				-78.91	
		NR_TDD_FR1_C				-78.41	
		NR_FDD_FR1_D, NR_TDD_FR1_D				-77.91	
		NR_FDD_FR1_E, NR_TDD_FR1_E				-77.41	
		NR_FDD_FR1_F				-76.91	
		NR_FDD_FR1_G				-76.41	
		NR_FDD_FR1_H				-75.91	
Propagation condition			-	AWGN			
Antenna configuration			-	1x2			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5:	NR operating band groups are as defined in clause 3.5.2.
Note 6:	The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

A.6.7.3.1.3 Test Requirements

The SS-SINR measurement accuracy shall fulfil the requirements in clause 10.1.12.1.1.

A.6.7.3.2 SA Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.6.7.3.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1.14.1.1 and 10.1.14.1.2.

A.6.7.3.2.2 Test Parameters

In this test case the two cells (i.e., Cell 1 and Cell 2) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.6.7.3.2.2-1. Both absolute accuracy and relative accuracy requirements of SS-SINR inter-frequency measurement are tested by using test parameters in Table A.6.7.3.2.2-2. In all test cases, Cell 1 is the PCell and Cell 2 is target cell.

Table A.6.7.3.2.2-1: SS-SINR Inter frequency SS-SINR supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.7.3.2.2-2: SS-SINR Inter frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1	freq2	freq1	freq2	freq1	freq2
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
TDD configuration	Config 1		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
Downlink initial BWP configuration			DLBWP.0.1					
Downlink dedicated BWP configuration			DLBWP.1.1					
Uplink initial BWP configuration			ULBWP.0.1					
Uplink dedicated BWP configuration			ULBWP.1.1					
DRX Cycle configuration		ms	Not Applicable					
Gap pattern ID			0	-	0	-	0	-
TRS configuration	Config 1		TRS.1.1 FDD		TRS.1.1 FDD		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD		TRS.1.1 TDD		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD	

PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3		SR2.1 TDD		SR2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	
	Config 2		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
	Config 3		CR2.1 TDD		CR2.1 TDD		CR2.1 TDD	
Dedicated CORESET Reference Channel	Config 1		CCR.1 .1 FDD	-	CCR.1. 1 FDD	-	CCR.1. 1 FDD	-
	Config 2		CCR.1 .1 TDD		CCR.1. 1 TDD		CCR.1. 1 TDD	
	Config 3		CCR2. 1 TDD		CCR2.1 TDD		CCR2. 1 TDD	
OCNG Patterns			OP.1					
SS-RSSI-Measurement			Not Applicable					
Time offset with Cell 1	Config 1	ms	-	3	-	3	-	3
	Config 2,3	µs	-	3	-	3	-	3
SMTC configuration	Config 1		SMTC pattern 2					
	Config 2,3		SMTC pattern 1					
SSB configuration	Config 1,2		SSB.1 FR1					
	Config 3		SSB.2 FR1					
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15					
	Config 3		30					
EPRE ratio of PSS to SSS		dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} Note2	Config 1,2	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/15kHz	-88		-108.5		-119.5	
		NR_FDD_FR1_B						-119	
		NR_TDD_FR1_C						-118.5	
		NR_FDD_FR1_D NR_TDD_FR1_D						-118	
		NR_FDD_FR1_E NR_TDD_FR1_E						-117.5	
		NR_FDD_FR1_F						-117	
		NR_FDD_FR1_G						-116.5	
		NR_FDD_FR1_H						-116	
N_{oc} Note2	Config 1,2		dBm/SCS	-88		-108.5		Same as Noc for 15kHz	
	Config 3	NR_FDD_FR1_A		-85		-105.5		-116.5	

		NR_TDD_FR1_A NOTE 6							
		NR_FDD_FR1_B						-116	
		NR_TDD_FR1_C						-115.5	
		NR_FDD_FR1_D NR_TDD_FR1_D						-115	
		NR_FDD_FR1_E NR_TDD_FR1_E						-114.5	
		NR_FDD_FR1_F						-114	
		NR_FDD_FR1_G						-114.5	
		NR_FDD_FR1_H						-113	
$\hat{E}_s/I_{ot}$			dB	-1.75	-1.75	20	20	-4.0	-4.0
$\hat{E}_s/N_{oc}$			dB	-1.75		20		-4.0	
SS-RSRP Note3	Config 1,2	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/SCS	-89.75		-88.5		-123.5	
		NR_FDD_FR1_B						-123	
		NR_TDD_FR1_C						-122.5	
		NR_FDD_FR1_D NR_TDD_FR1_D						-122	
		NR_FDD_FR1_E NR_TDD_FR1_E						-121.5	
		NR_FDD_FR1_F						-121	
		NR_FDD_FR1_G						-120.5	
		NR_FDD_FR1_H						-120	
	Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6		-86.75		-85.5		-120.5	
		NR_FDD_FR1_B						-120	
		NR_TDD_FR1_C						-119.5	
		NR_FDD_FR1_D NR_TDD_FR1_D						-119	
		NR_FDD_FR1_E NR_TDD_FR1_E						-118.5	
		NR_FDD_FR1_F						-118	
		NR_FDD_FR1_G						-117.5	
		NR_FDD_FR1_H						-117	
SS-SINR Note3		NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dB	-1.75		20		-4.0	
		NR_FDD_FR1_B							
		NR_TDD_FR1_C							
		NR_FDD_FR1_D NR_TDD_FR1_D							
		NR_FDD_FR1_E NR_TDD_FR1_E							
		NR_FDD_FR1_F							
		NR_FDD_FR1_G							
		NR_FDD_FR1_H							
Io Note3	Config 1,2	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/ 9.36MHz	-57.83		-60.5		-90.09	
		NR_FDD_FR1_B						-89.59	
		NR_TDD_FR1_C						-89.09	
		NR_FDD_FR1_D NR_TDD_FR1_D						-88.59	
		NR_FDD_FR1_E NR_TDD_FR1_E						-88.09	

		NR_FDD_FR1_F				-87.59
		NR_FDD_FR1_G				-87.09
		NR_FDD_FR1_H				-86.59
	Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/ 38.16MHz	-51.73	-54.41	-84
		NR_FDD_FR1_B				-83.5
		NR_TDD_FR1_C				-83
		NR_FDD_FR1_D NR_TDD_FR1_D				-82.5
		NR_FDD_FR1_E NR_TDD_FR1_E				-82
		NR_FDD_FR1_F				-81.5
		NR_FDD_FR1_G				-81
		NR_FDD_FR1_H				-80.5
Propagation condition			-	AWGN		
Antenna configuration			-	1x2		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: NR operating band groups are as defined in clause 3.5.2.

Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

A.6.7.3.2.3 Test Requirements

The SS-SINR measurement accuracy shall fulfil the requirements in clause 10.1.14.1.1 and 10.1.14.1.2.

A.6.7.4 L1-RSRP measurement for beam reporting

A.6.7.4.1 SSB based L1-RSRP measurement

A.6.7.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clause 9.5.2 and clause 10.1.19.1 for L1-RSRP measurements based on SSB with the testing configurations for NR cells in Table A.6.7.4.1.1-1.

Table A.6.7.4.1.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.6.7.4.1.2 Test parameters

In this set of test cases there one cell in the test, PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.6.7.4.1.2-1 below. The absolute and relative accuracy of L1-RSRP measurements are tested by using the parameters in Table A.6.7.4.1.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured one SSB resource set with two SSB resources. UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSB resources 0 and 1.

Table A.6.7.4.1.2-1: FR1 SSB based L1-RSRP test parameters

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1~3		freq1	freq1
Duplex mode	1		FDD	FDD
	2		TDD	TDD
	3		TDD	TDD
TDD Configuration	1		N/A	N/A
	2		TDDConf.1.1	TDDConf.1.1
	3		TDDConf.2.1	TDDConf.2.1
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
	2		10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
	3		40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1		SR.1.1 FDD	SR.1.1 FDD
	2		SR.1.1 TDD	SR.1.1 TDD
	3		SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel	1		CR.1.1 FDD	CR.1.1 FDD
	2		CR.1.1 TDD	CR.1.1 TDD
	3		CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD	CCR.1.1 FDD
	2		CCR.1.1 TDD	CCR.1.1 TDD
	3		CCR.2.1 TDD	CCR.2.1 TDD
SSB configuration	1		SSB.3 FR1	SSB.3 FR1
	2		SSB.3 FR1	SSB.3 FR1
	3		SSB.4 FR1	SSB.4 FR1
OCNG Patterns	1~3		OP.1	OP.1
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
TRS configuration	1		TRS.1.1 FDD	TRS.1.1 FDD
	2		TRS.1.1 TDD	TRS.1.1 TDD
	3		TRS.1.2 TDD	TRS.1.2 TDD
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~3		SMTC.1	SMTC.1
reportConfigType	1~3		periodic	periodic
reportQuantity	1~3		ssb-Index-RSRP	ssb-Index-RSRP
Number of reported RS	1~3		2	2
L1-RSRP reporting period	1~3		slot80	slot80
EPRE ratio of PSS to SSS	1~3	dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS[Note 1]				

EPRE ratio of OCNG to OCNG DMRS Note 1					
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1~3	dBm/15kHz	-94.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2	dBm/SSB SCS	-94.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3		-91.65	-114
	NR_FDD_FR1_B				-113.5
	NR_TDD_FR1_C				-114
	NR_FDD_FR1_D, NR_TDD_FR1_D				-112.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-112
	NR_FDD_FR1_F				-111.5
	NR_FDD_FR1_G				-111
	NR_FDD_FR1_H				-110.5
$\hat{E}_s/I_{ot}$		1~3	dB	10	-3
SSB RSRP Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2	dBm/SSB SCS	-84.65	-120
	NR_FDD_FR1_B				-119.5
	NR_TDD_FR1_C				-119
	NR_FDD_FR1_D, NR_TDD_FR1_D				-118.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-118
	NR_FDD_FR1_F				-117.5
	NR_FDD_FR1_G				-117
	NR_FDD_FR1_H				-116.5
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3		-81.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5

	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
Io Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2	dBm/9.36 MHz	-56.28	-87.28
	NR_FDD_FR1_B				-86.78
	NR_TDD_FR1_C				-86.28
	NR_FDD_FR1_D, NR_TDD_FR1_D				-85.78
	NR_FDD_FR1_E, NR_TDD_FR1_E				-85.28
	NR_FDD_FR1_F				-84.78
	NR_FDD_FR1_G				-84.28
	NR_FDD_FR1_H				-83.78
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3	dBm/38.16 MHz	-50.19	-81.19
	NR_FDD_FR1_B				-80.69
	NR_TDD_FR1_C				-80.19
	NR_FDD_FR1_D, NR_TDD_FR1_D				-79.69
	NR_FDD_FR1_E, NR_TDD_FR1_E				-79.19
	NR_FDD_FR1_F				-78.69
	NR_FDD_FR1_G				-78.19
	NR_FDD_FR1_H				-77.69
$\hat{E}_s / N_{oc}$		1~3	dB	10	-3
Propagation condition		1~3		AWGN	AWGN
Antenna configuration		1~3		1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

A.6.7.4.1.3 Test Requirements

The L1-RSRP measurement accuracy for SSB resource reported by UE in L1-RSRP report (SSB#0 or SSB#1) of Cell 2 shall fulfil the requirements in clauses 10.1.19.1.

A.6.7.4.2 CSI-RS based L1-RSRP measurement on resource set with repetition off

A.6.7.4.2.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clause 9.5.3 and clause 10.1.19.2 for L1-RSRP measurements based on CSI-RS with the testing configurations for NR cells in Table A.6.7.4.2.1-1.

Table A.6.7.4.2.1-1: Applicable NR configurations for FR1 CSI-RS based L1-RSRP test

Config	Description
1	NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.6.7.4.2.2 Test parameters

In this set of test cases there are one cell in the test, PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.6.7.4.2.2-1 below. The absolute and relative accuracy of L1-RSRP measurements are tested by using the parameters in Table A.6.7.4.2.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured one CSI-RS resource set with two CSI-RS resources. UE is configured to perform RLM and BFD based on SSB 0 and 1. CSI-RS is not transmitted in the same OFDM symbols as SSB.

Table A.6.7.4.2.2-1: FR1 CSI-RS based L1-RSRP test parameters

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1~3		freq1	freq1
Duplex mode	1		FDD	FDD
	2		TDD	TDD
	3		TDD	TDD
TDD Configuration	1		N/A	N/A
	2		TDDConf.1.1	TDDConf.1.1
	3		TDDConf.2.1	TDDConf.2.1
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
	2		10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
	3		40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1		SR.1.1 FDD	SR.1.1 FDD
	2		SR.1.1 TDD	SR.1.1 TDD
	3		SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel	1		CR.1.1 FDD	CR.1.1 FDD
	2		CR.1.1 TDD	CR.1.1 TDD
	3		CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD	CCR.1.1 FDD
	2		CCR.1.1 TDD	CCR.1.1 TDD
	3		CCR.2.1 TDD	CCR.2.1 TDD
SSB configuration	1		SSB.3 FR1	SSB.3 FR1
	2		SSB.3 FR1	SSB.3 FR1
	3		SSB.4 FR1	SSB.4 FR1
OCNG Patterns	1~3		OP.1	OP.1
TRS configuration	1		TRS.1.1 FDD	TRS.1.1 FDD
	2		TRS.1.1 TDD	TRS.1.1 TDD
	3		TRS.1.2 TDD	TRS.1.2 TDD
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~3		SMTC.1	SMTC.1
CSI-RS	1		CSI-RS 1.2 FDD	CSI-RS 1.2 FDD
	2		CSI-RS 1.2 TDD	CSI-RS 1.2 TDD
	3		CSI-RS 2.2 TDD	CSI-RS 2.2 FDD
reportConfigType	1~3		periodic	periodic

reportQuantity		1~3		cri-RSRP	cri-RSRP
Number of reported RS		1~3		2	2
L1-RSRP reporting period		1~3		slot80	slot80
EPRE ratio of PSS to SSS		1~3	dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1~3	dBm/15kHz	-94.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2	dBm/CSI-RS SCS	-94.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3		-91.65	-114
	NR_FDD_FR1_B				-113.5
	NR_TDD_FR1_C				-114
	NR_FDD_FR1_D, NR_TDD_FR1_D				-112.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-112
	NR_FDD_FR1_F				-111.5
	NR_FDD_FR1_G				-111
	NR_FDD_FR1_H				-110.5
$\hat{E}_s/I_{ot}$		1~3	dB	10	-3
CSI-RS RSRP Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2	dBm/CSI-RS SCS	-84.65	-120

	NR_FDD_FR1_B				-119.5
	NR_TDD_FR1_C				-119
	NR_FDD_FR1_D, NR_TDD_FR1_D				-118.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-118
	NR_FDD_FR1_F				-117.5
	NR_FDD_FR1_G				-117
	NR_FDD_FR1_H				-116.5
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3		-81.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
Io Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2	dBm/9.36 MHz	-56.28	-87.28
	NR_FDD_FR1_B				-86.78
	NR_TDD_FR1_C				-86.28
	NR_FDD_FR1_D, NR_TDD_FR1_D				-85.78
	NR_FDD_FR1_E, NR_TDD_FR1_E				-85.28
	NR_FDD_FR1_F				-84.78
	NR_FDD_FR1_G				-84.28
	NR_FDD_FR1_H				-83.78
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3	dBm/38.16 MHz	-50.19	-81.19
	NR_FDD_FR1_B				-80.69
	NR_TDD_FR1_C				-80.19
	NR_FDD_FR1_D, NR_TDD_FR1_D				-79.69
	NR_FDD_FR1_E, NR_TDD_FR1_E				-79.19
	NR_FDD_FR1_F				-78.69
	NR_FDD_FR1_G				-78.19
	NR_FDD_FR1_H				-77.69
$\hat{E}_s/N_{oc}$		1~3	dB	10	-3
Propagation condition		1~3		AWGN	AWGN
Antenna configuration		1~3		1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

A.6.7.4.2.3 Test Requirements

The L1-RSRP measurement accuracy for CSI-RS resource reported by UE in L1-RSRP report (CSI-RS#0 or CSI-RS#1) of Cell 1 shall fulfil the requirements in clause 10.1.19.2.

A.6.7.5 E-UTRAN RSRP

A.6.7.5.1 SA: inter-RAT measurement accuracy with FR1 serving cell

A.6.7.5.1.1 Test Purpose and Environment

The purpose of this test is to verify that the E-UTRAN RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.2.2 for SA inter-RAT E-UTRAN RSRP measurements.

A.6.7.5.1.2 Test parameters

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the NR PCell and Cell 2 is an E-UTRAN inter-RAT neighbour cell. Supported test configurations are shown in table A.6.7.5.1.2-1. The measurement accuracy of SA inter-RAT E-UTRAN RSRP are tested by using the parameters in A.6.7.5.1.2-2 and A.6.7.5.1.2-3.

Table A.6.7.5.1.2-1: Inter-RAT E-UTRAN RSRP supported test configurations with FR1 serving cell

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, E-UTRAN FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, E-UTRAN FDD
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, E-UTRAN FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, E-UTRAN TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, E-UTRAN TDD
6	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, E-UTRAN TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.7.5.1.2-2: NR Cell specific test parameters for SA Inter-RAT E-UTRAN RSRP test parameters

Parameter		Unit	Cell 1
NR RF channel number			1
Duplex mode	Config 1, 4		FDD
	Config 2, 3, 5, 6		TDD
TDD Configuration	Config 1, 4		N/A
	Config 2, 5		TDDConf.1.1
	Config 3, 6		TDDConf.2.1
$BW_{channel}$	Config 1, 4	MHz	10: $N_{RB,c}$ = 52 (FDD)
	Config 2, 5		10: $N_{RB,c}$ = 52 (TDD)
	Config 3, 6		40: $N_{RB,c}$ = 106 (TDD)
Gap pattern Id			0
PDSCH reference measurement channel	Config 1, 4		SR.1.1 FDD
	Config 2, 5		SR.1.1 TDD
	Config 3, 6		SR.2.1 TDD
RMSI CORSET reference channel	Config 1, 4		CR.1.1 FDD
	Config 2, 5		CR.1.1 TDD
	Config 3, 6		CR.2.1 TDD
Dedicated CORSET reference channel	Config 1, 4		CCR.1.1 FDD
	Config 2, 5		CCR.1.1 TDD
	Config 3, 6		CCR.2.1 TDD

CSI-RS for tracking	Config 1, 4		TRS.1.1 FDD
	Config 2, 5		TRS.1.1 TDD
	Config 3, 6		TRS.1.2 TDD
BWP configurations	Initial DL BWP		DLBWP.0.1
	Dedicated DL BWP		DLBWP.1.1
	Initial UL BWP		ULBWP.0.1
	Dedicated UL BWP		ULBWP.1.1
OCNG pattern[Note1]			OP.1
SMTC configuration			SMTC.1
SSB configuration	Config 1, 2, 4, 5		SSB.1 FR1
	Config 3, 6		SSB.2 FR1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH_DMRS to SSS			
EPRE ratio of PBCH to PBCH_DMRS			
EPRE ratio of PDCCH_DMRS to SSS			
EPRE ratio of PDCCH to PDCCH_DMRS			
EPRE ratio of PDSCH_DMRS to SSS			
EPRE ratio of PDSCH to PDSCH_DMRS			
EPRE ratio of OCNG DMRS to SSS			
EPRE ratio of OCNG to OCNG DMRS			
N_{oc}[Note2]		dBm/15 kHz	-104
N_{oc}[Note2]	Config 1, 2, 4, 5	dBm/SCS	-104
	Config 3, 6		-101
$\hat{E}_s/N_{oc}$		dB	17
$\hat{E}_s/I_{ot}$[Note3]		dB	17
SS-RSRP[Note3]	Config 1, 2, 4, 5	dBm/SCS	-87
	Config 3, 6		-84
SSB_RP[Note3]	Config 1, 2, 4, 5	dBm/SCS	-87
	Config 3, 6		-84
Io[Note3]	Config 1, 2, 4, 5	dBm/9.36 MHz	-58.96
	Config 3, 6	dBm/38.16 MHz	-52.87
Propagation condition			AWGN
Antenna Configuration and Correlation Matrix			1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.6.7.5.1.2-3: E-UTRAN Cell specific test parameters for SA Inter-RAT E-UTRAN RSRP test parameters

Parameter		Unit	Cell 2	
			Test 1	Test 2
E-UTRA RF channel number			1	
Duplex mode	Config 1, 2, 3		FDD	
	Config 4, 5, 6		TDD	
TDD special subframe configuration[Note1]	Config 1, 2, 3		N/A	
	Config 4, 5, 6		6	
TDD uplink-downlink configuration[Note1]	Config 1, 2, 3		N/A	
	Config 4, 5, 6		1	
$BW_{channel}$		MHz	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	

PDSCH parameters: DL Reference Measurement Channel[Note2]			-	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]	Config 1, 2, 3		5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
	Config 4, 5, 6		5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]	Config 1, 2, 3		5 MHz: OP.19 FDD 10 MHz: OP.6 FDD 20 MHz: OP.14 FDD	
	Config 4, 5, 6		5 MHz: OP.10 TDD 10 MHz: OP.2 TDD 20 MHz: OP.8 TDD	
PBCH_RA		dB	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note3]				
OCNG_RB[Note3]				
N_{oc}[Note4]	Bands FDD_A [Note 9], TDD_A	dBm/15kHz	-91.65	-117
	Bands FDD_B1, FDD_B2 [Note 10]			-116.5
	Bands FDD_C, TDD_C			-116
	Bands FDD_D			-115.5
	Bands FDD_E, FDD_F [Note 7], TDD_E			-115
	Bands FDD_G [Note 8]			-114
	Bands FDD_H			-113.5
$\hat{E}_s/N_{oc}$		dB	10	-4
$\hat{E}_s/I_{ot}$[Note5]		dB	10	-4
RSRP[Note5]	Bands FDD_A [Note 9], TDD_A	dBm/15kHz	-81.65	-121
	Bands FDD_B1, FDD_B2 [Note 10]			-120.5
	Bands FDD_C, TDD_C			-120
	Bands FDD_D			-119.5
	Bands FDD_E, FDD_F [Note 7], TDD_E			-119
	Bands FDD_G [Note 8]			-118
	Bands FDD_H			-117.5
SCH_RP[Note5]	Bands FDD_A [Note 9], TDD_A	dBm/15kHz	-81.65	-121
	Bands FDD_B1, FDD_B2 [Note 10]			-120.5
	Bands FDD_C, TDD_C			-120
	Bands FDD_D			-119.5
	Bands FDD_E, FDD_F [Note 7], TDD_E			-119
	Bands FDD_G [Note 8]			-118

	Bands FDD_H			-117.5
Io^{Note5}	Bands FDD_A Note 9, TDD_A	dBm/Ch BW	-53.45 + 10log($N_{RB,c}$/50)	-87.76 + 10log($N_{RB,c}$/50)
	Bands FDD_B1, FDD_B2 Note 10			-87.26 + 10log($N_{RB,c}$/50)
	Bands FDD_C, TDD_C			-86.76 + 10log($N_{RB,c}$/50)
	Bands FDD_D			-86.26 + 10log($N_{RB,c}$/50)
	Bands FDD_E, FDD_F Note 7, TDD_E			-85.76 + 10log($N_{RB,c}$/50)
	Bands FDD_G Note 8			-84.76 + 10log($N_{RB,c}$/50)
	Bands FDD_H			-84.26 + 10log($N_{RB,c}$/50)
Propagation Condition			AWGN	
Antenna Configuration and Correlation Matrix			1x2	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 6: E-UTRA operating band groups are as defined in clause 3.5 of TS 36.133 [15].
Note 7: For Band 26, the tests shall be performed with the carrier frequency of assigned E-UTRA channel bandwidth within 865-894 MHz.
Note 8: Except Band 29.
Note 9: Except Band 32, Band 75 and Band 76.
Note 10: For Band 74, the tests shall be performed with the carrier frequency of the assigned E-UTRA channel bandwidth within 1475.9-1510.9 MHz.

A.6.7.5.1.3 Test Requirements

The SA inter-RAT E-UTRAN RSRP measurement accuracy for cell 2 shall fulfil absolute requirement in clause 10.2.2.

A.6.7.6 E-UTRAN RSRQ

A.6.7.6.1 SA: inter-RAT measurement accuracy with FR1 serving cell

A.6.7.6.1.1 Test Purpose and Environment

The purpose of this test is to verify that the E-UTRAN RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.2.3 for SA inter-RAT E-UTRAN RSRQ measurements.

A.6.7.6.1.2 Test parameters

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the NR PCell and Cell 2 is an E-UTRAN inter-RAT neighbour cell. Supported test configurations are shown in table A.6.7.6.1.2-1. The measurement accuracy of SA inter-RAT E-UTRAN RSRQ are tested by using the parameters in A.6.7.6.1.2-2 and A.6.7.6.1.2-3.

Table A.6.7.6.1.2-1: Inter-RAT E-UTRAN RSRQ supported test configurations with FR1 serving cell

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, E-UTRAN FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, E-UTRAN FDD
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, E-UTRAN FDD

4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, E-UTRAN TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, E-UTRAN TDD
6	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, E-UTRAN TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.7.6.1.2-2: NR Cell specific test parameters for SA Inter-RAT E-UTRAN RSRQ test parameters

Parameter		Unit	Cell 1
NR RF channel number			1
Duplex mode	Config 1, 4		FDD
	Config 2, 3, 5, 6		TDD
TDD Configuration	Config 1, 4		N/A
	Config 2, 5		TDDConf.1.1
	Config 3, 6		TDDConf.2.1
$BW_{channel}$	Config 1, 4	MHz	10: $N_{RB,c}$ = 52 (FDD)
	Config 2, 5		10: $N_{RB,c}$ = 52 (TDD)
	Config 3, 6		40: $N_{RB,c}$ = 106 (TDD)
Gap pattern Id			0
PDSCH reference measurement channel	Config 1, 4		SR.1.1 FDD
	Config 2, 5		SR.1.1 TDD
	Config 3, 6		SR.2.1 TDD
RMSI CORSET reference channel	Config 1, 4		CR.1.1 FDD
	Config 2, 5		CR.1.1 TDD
	Config 3, 6		CR.2.1 TDD
Dedicated CORSET reference channel	Config 1, 4		CCR.1.1 FDD
	Config 2, 5		CCR.1.1 TDD
	Config 3, 6		CCR.2.1 TDD
CSI-RS for tracking	Config 1, 4		TRS.1.1 FDD
	Config 2, 5		TRS.1.1 TDD
	Config 3, 6		TRS.1.2 TDD
BWP configurations	Initial DL BWP		DLBWP.0.1
	Dedicated DL BWP		DLBWP.1.1
	Initial UL BWP		ULBWP.0.1
	Dedicated UL BWP		ULBWP.1.1
OCNG pattern[Note1]			OP.1
SMTC configuration			SMTC.1
SSB configuration	Config 1, 2, 4, 5		SSB.1 FR1
	Config 3, 6		SSB.2 FR1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH_DMRS to SSS			
EPRE ratio of PBCH to PBCH_DMRS			
EPRE ratio of PDCCH_DMRS to SSS			
EPRE ratio of PDCCH to PDCCH_DMRS			
EPRE ratio of PDSCH_DMRS to SSS			
EPRE ratio of PDSCH to PDSCH_DMRS			
EPRE ratio of OCNG DMRS to SSS			
EPRE ratio of OCNG to OCNG DMRS			
N_{oc}[Note2]		dBm/15 kHz	-104
N_{oc}[Note2]	Config 1, 2, 4, 5	dBm/SCS	-104
	Config 3, 6		-101
$\hat{E}_s/N_{oc}$		dB	dB
$\hat{E}_s/I_{ot}$[Note3]		dB	dB
SS-RSRQ[Note3]	Config 1, 2, 4, 5	dBm/SCS	-87
	Config 3, 6		-84

SSB_RP[Note3]	Config 1, 2, 4, 5	dBm/SCS	-87
	Config 3, 6		-84
Io[Note3]	Config 1, 2, 4, 5	dBm/9.36 MHz	-58.96
	Config 3, 6	dBm/38.16 MHz	-52.87
Propagation condition			AWGN
Antenna Configuration and Correlation Matrix			1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: $\hat{E}_s/I_{ot}$, SS-RSRQ, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			

Table A.6.7.6.1.2-3: E-UTRAN Cell specific test parameters for SA Inter-RAT E-UTRAN RSRQ test parameters

Parameter		Unit	Cell 2		
			Test 1	Test 2	Test 3
E-UTRA RF channel number			1		
Duplex mode	Config 1, 2, 3		FDD		
	Config 4, 5, 6		TDD		
TDD special subframe configuration[Note1]	Config 1, 2, 3		N/A		
	Config 4, 5, 6		6		
TDD uplink-downlink configuration[Note1]	Config 1, 2, 3		N/A		
	Config 4, 5, 6		1		
$BW_{channel}$		MHz	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100		
PDSCH parameters: DL Reference Measurement Channel[Note2]			-		
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]	Config 1, 2, 3		5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD		
	Config 4, 5, 6		5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD		
OCNG Patterns[Note2]	Config 1, 2, 3		5 MHz: OP.19 FDD 10 MHz: OP.6 FDD 20 MHz: OP.14 FDD		
	Config 4, 5, 6		5 MHz: OP.10 TDD 10 MHz: OP.2 TDD 20 MHz: OP.8 TDD		
PBCH_RA		dB	0		
PBCH_RB					
PSS_RA					
SSS_RA					
PCFICH_RB					
PHICH_RA					
PHICH_RB					
PDCCH_RA					
PDCCH_RB					
PDSCH_RA					
PDSCH_RB					
OCNG_RA[Note3]					

OCNG_RB Note3					
N_{oc} Note4	Bands FDD_A Note 9, TDD_A	dBm/15kHz	-83	-104.70	-119.5
	Bands FDD_B1, FDD_B2 Note 10				-119
	Bands FDD_C, TDD_C				-118.5
	Bands FDD_D				-118
	Bands FDD_E, FDD_F Note 7, TDD_E				-117.5
	Bands FDD_G Note 8				-116.5
	Bands FDD_H				-116
$\hat{E}_s/N_{oc}$		dB	-1.75	-4.0	-4.0
$\hat{E}_s/I_{ot}$ Note5		dB	-1.75	-4.0	-4.0
RSRP Note5	Bands FDD_A Note 9, TDD_A	dBm/15kHz	-84.75	-108.70	-123.5
	Bands FDD_B1, FDD_B2 Note 10				-123
	Bands FDD_C, TDD_C				-122.5
	Bands FDD_D				-122
	Bands FDD_E, FDD_F Note 7, TDD_E				-121.5
	Bands FDD_G Note 8				-120.5
	Bands FDD_H				-120
RSRQ Note5	Bands FDD_A Note 9, TDD_A	dB	-14.76	-16.25	-16.25
	Bands FDD_B1, FDD_B2 Note 10				
	Bands FDD_C, TDD_C				
	Bands FDD_D				
	Bands FDD_E, FDD_F Note 7, TDD_E				
	Bands FDD_G Note 8				
	Bands FDD_H				
Io Note5	Bands FDD_A Note 9, TDD_A	dBm/Ch BW	-53 + 10log($N_{RB,c}$/50)	-75.46 + 10log($N_{RB,c}$/50)	-90.26 + 10log($N_{RB,c}$/50)
	Bands FDD_B1, FDD_B2 Note 10				-89.76 + 10log($N_{RB,c}$/50)
	Bands FDD_C, TDD_C				-89.26 + 10log($N_{RB,c}$/50)
	Bands FDD_D				-88.76 + 10log($N_{RB,c}$/50)
	Bands FDD_E, FDD_F Note 7, TDD_E				-88.26 + 10log($N_{RB,c}$/50)
	Bands FDD_G Note 8				-87.26 + 10log($N_{RB,c}$/50)
	Bands FDD_H				-86.76 + 10log($N_{RB,c}$/50)
Propagation Condition			AWGN		
Antenna Configuration and Correlation Matrix			1x2		

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 4:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5:	$\hat{E}_s/I_{ot}$, RSRP, RSRQ and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 6:	E-UTRA operating band groups are as defined in clause 3.5 of TS 36.133 [15].
Note 7:	For Band 26, the tests shall be performed with the carrier frequency of assigned E-UTRA channel bandwidth within 865-894 MHz.
Note 8:	Except Band 29.
Note 9:	Except Band 32, Band 75 and Band 76.
Note 10:	For Band 74, the tests shall be performed with the carrier frequency of the assigned E-UTRA channel bandwidth within 1475.9-1510.9 MHz.

A.6.7.6.1.3 Test Requirements

The SA inter-RAT E-UTRAN RSRQ measurement accuracy for cell 2 shall fulfil absolute requirement in clause 10.2.3.

A.6.7.7 E-UTRAN RS-SINR

A.6.7.7.1 SA: inter-RAT measurement accuracy with FR1 serving cell

A.6.7.7.1.1 Test Purpose and Environment

The purpose of this test is to verify that the E-UTRAN RS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.2.4 for SA inter-RAT E-UTRAN RS-SINR measurements.

A.6.7.7.1.2 Test parameters

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the NR PCell and Cell 2 is an E-UTRAN inter-RAT neighbour cell. Supported test configurations are shown in table A.6.7.7.1.2-1. The measurement accuracy of SA inter-RAT E-UTRAN RS-SINR are tested by using the parameters in A.6.7.7.1.2-2 and A.6.7.7.1.2-3.

Table A.6.7.7.1.2-1: Inter-RAT E-UTRAN RS-SINR supported test configurations with FR1 serving cell

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, E-UTRAN FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, E-UTRAN FDD
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, E-UTRAN FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, E-UTRAN TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, E-UTRAN TDD
6	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, E-UTRAN TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.7.7.1.2-2: NR Cell specific test parameters for SA Inter-RAT E-UTRAN RS-SINR test parameters

Parameter		Unit	Cell 1
NR RF channel number			1
Duplex mode	Config 1, 4		FDD
	Config 2, 3, 5, 6		TDD
TDD Configuration	Config 1, 4		N/A
	Config 2, 5		TDDConf.1.1
	Config 3, 6		TDDConf.2.1
$BW_{channel}$	Config 1, 4	MHz	10: $N_{RB,c}$ = 52 (FDD)
	Config 2, 5		10: $N_{RB,c}$ = 52 (TDD)
	Config 3, 6		40: $N_{RB,c}$ = 106 (TDD)
Gap pattern Id			0

PDSCH reference measurement channel	Config 1, 4		SR.1.1 FDD
	Config 2, 5		SR.1.1 TDD
	Config 3, 6		SR.2.1 TDD
RMSI CORSET reference channel	Config 1, 4		CR.1.1 FDD
	Config 2, 5		CR.1.1 TDD
	Config 3, 6		CR.2.1 TDD
Dedicated CORSET reference channel	Config 1, 4		CCR.1.1 FDD
	Config 2, 5		CCR.1.1 TDD
	Config 3, 6		CCR.2.1 TDD
CSI-RS for tracking	Config 1, 4		TRS.1.1 FDD
	Config 2, 5		TRS.1.1 TDD
	Config 3, 6		TRS.1.2 TDD
BWP configurations	Initial DL BWP		DLBWP.0.1
	Dedicated DL BWP		DLBWP.1.1
	Initial UL BWP		ULBWP.0.1
	Dedicated UL BWP		ULBWP.1.1
OCNG pattern[Note1]			OP.1
SMTC configuration			SMTC.1
SSB configuration	Config 1, 2, 4, 5		SSB.1 FR1
	Config 3, 6		SSB.2 FR1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH_DMRS to SSS			
EPRE ratio of PBCH to PBCH_DMRS			
EPRE ratio of PDCCH_DMRS to SSS			
EPRE ratio of PDCCH to PDCCH_DMRS			
EPRE ratio of PDSCH_DMRS to SSS			
EPRE ratio of PDSCH to PDSCH_DMRS			
EPRE ratio of OCNG DMRS to SSS			
EPRE ratio of OCNG to OCNG DMRS			
N_{oc}[Note2]		dBm/15 kHz	-104
N_{oc}[Note2]	Config 1, 2, 4, 5	dBm/SCS	-104
	Config 3, 6		-101
$\hat{E}_s/N_{oc}$		dB	17
$\hat{E}_s/I_{ot}$[Note3]		dB	17
SS-RS-SINR[Note3]	Config 1, 2, 4, 5	dBm/SCS	-87
	Config 3, 6		-84
SSB_RP[Note3]	Config 1, 2, 4, 5	dBm/SCS	-87
	Config 3, 6		-84
Io[Note3]	Config 1, 2, 4, 5	dBm/9.36 MHz	-58.96
	Config 3, 6	dBm/38.16 MHz	-52.87
Propagation condition			AWGN
Antenna Configuration and Correlation Matrix			1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: $\hat{E}_s/I_{ot}$, SS-RS-SINR, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.6.7.7.1.2-3: E-UTRAN Cell specific test parameters for SA Inter-RAT E-UTRAN RS-SINR test parameters

Parameter	Unit	Cell 2		
		Test 1	Test 2	Test 3
E-UTRA RF channel number		1		

Duplex mode	Config 1, 2, 3		FDD		
	Config 4, 5, 6		TDD		
TDD special subframe configuration[Note1]	Config 1, 2, 3		N/A		
	Config 4, 5, 6		6		
TDD uplink-downlink configuration[Note1]	Config 1, 2, 3		N/A		
	Config 4, 5, 6		1		
$BW_{channel}$		MHz	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100		
PDSCH parameters: DL Reference Measurement Channel[Note2]			-		
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]	Config 1, 2, 3		5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD		
	Config 4, 5, 6		5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD		
OCNG Patterns[Note2]	Config 1, 2, 3		5 MHz: OP.19 FDD 10 MHz: OP.6 FDD 20 MHz: OP.14 FDD		
	Config 4, 5, 6		5 MHz: OP.10 TDD 10 MHz: OP.2 TDD 20 MHz: OP.8 TDD		
PBCH_RA		dB	0		
PBCH_RB					
PSS_RA					
SSS_RA					
PCFICH_RB					
PHICH_RA					
PHICH_RB					
PDCCH_RA					
PDCCH_RB					
PDSCH_RA					
PDSCH_RB					
OCNG_RA[Note3]					
OCNG_RB[Note3]					
N_{oc}[Note4]	Bands FDD_A [Note 9], TDD_A	dBm/15kHz	-88	-108.50	-119.5
	Bands FDD_B1, FDD_B2 [Note 10]				-119
	Bands FDD_C, TDD_C				-118.5
	Bands FDD_D				-118
	Bands FDD_E, FDD_F [Note 7], TDD_E				-117.5
	Bands FDD_G [Note 8]				-116.5
	Bands FDD_H				-116
CRS $\hat{E}_s/N_{oc1}$		dB	-1.75	20.0	-4.0
CRS $\hat{E}_s/I_{ot}$[Note5]		dB	-1.75	20.0	-4.0
RSRP[Note5]	Bands FDD_A [Note 9], TDD_A	dBm/15kHz	-89.75	-88.50	-123.5
	Bands FDD_B1, FDD_B2 [Note 10]				-123
	Bands FDD_C, TDD_C				-122.5
	Bands FDD_D				-122
	Bands FDD_E, FDD_F [Note 7], TDD_E				-121.5

	Bands FDD_G Note 8				-120.5
	Bands FDD_H				-120
RS-SINR Note5	Bands FDD_A Note 9, TDD_A	dB	-1.75	20	-4.0
	Bands FDD_B1, FDD_B2 Note 10				
	Bands FDD_C, TDD_C				
	Bands FDD_D				
	Bands FDD_E, FDD_F Note 7, TDD_E				
	Bands FDD_G Note 8				
	Bands FDD_H				
Io Note5	Bands FDD_A Note 9, TDD_A	dBm/Ch BW	-53.79 + 10log($N_{RB,c}$ /50)	-60.56 + 10log($N_{RB,c}$ /50)	-93.48 + 10log($N_{RB,c}$ /50)
	Bands FDD_B1, FDD_B2 Note 10				-92.98 + 10log($N_{RB,c}$ /50)
	Bands FDD_C, TDD_C				-92.48 + 10log($N_{RB,c}$ /50)
	Bands FDD_D				-91.98 + 10log($N_{RB,c}$ /50)
	Bands FDD_E, FDD_F Note 7, TDD_E				-91.48 + 10log($N_{RB,c}$ /50)
	Bands FDD_G Note 8				-90.48 + 10log($N_{RB,c}$ /50)
	Bands FDD_H				-89.98 + 10log($N_{RB,c}$ /50)
Propagation Condition			AWGN		
Antenna Configuration and Correlation Matrix			1x2		

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 4a: Void.
Note 5: CRS $\hat{E}_s/I_{ot}$, RSRP, RS-SINR and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 6: E-UTRA operating band groups are as defined in clause 3.5 of TS 36.133 [15].
Note 7: For Band 26, the tests shall be performed with the carrier frequency of assigned E-UTRA channel bandwidth within 865-894 MHz.
Note 8: Except Band 29.
Note 9: Except Band 32, Band 75 and Band 76.
Note 10: For Band 74, the tests shall be performed with the carrier frequency of the assigned E-UTRA channel bandwidth within 1475.9-1510.9 MHz.

A.6.7.7.1.3 Test Requirements

The SA inter-RAT E-UTRAN RS-SINR measurement accuracy for cell 2 shall fulfil absolute requirement in clause 10.2.4.

A.6.7.8 CLI measurements

A.6.7.8.1 SA SRS-RSRP measurement accuracy with FR1 serving cell

A.6.7.8.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SRS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 10.1.22.1.1 with the testing configurations for NR cells in Table A.6.7.8.1.1-1.

Table A.6.7.8.1.1-1: Applicable NR configurations for FR1 SRS-RSRP accuracy test

Config	Description
1	15kHz SRS SCS, 10 MHz bandwidth, TDD duplex mode
2	30kHz SRS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.6.7.8.1.2 Test parameters

In this set of test cases there is one cell in the test, FR1 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.6.7.8.1.2-1 below. The test parameter for the (virtual) neighbor cell UE transmitting SRS are given in Table A.6.7.8.1.2-2.

Before the test UE is configured to perform SRS-RSRP measurement. During the test, the test system transmits SRS resources for measurement in the DL slots according to the SRS configuration in Table A.6.7.8.1.2-3. There is no measurement gap configured in the test. During the test, the test system does not transmit PDCCH/PDSCH/OCNG on SRS symbol to be transmitted and on 1 data symbol before SRS to be transmitted.

Table A.6.7.8.1.2-1: FR1 test parameters for SRS-RSRP accuracy for PCell

Parameter	Config	Unit	Test 1	Test 2	Test 3
SSB GSCN	1~2		freq1	freq1	freq1
Duplex mode	1~2		TDD	TDD	TDD
TDD configuration	1		TDDConf.1.1	TDDConf.1.1	TDDConf.1.1
	2		TDDConf.2.1	TDDConf.2.1	TDDConf.2.1
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
	2		40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1		SR.1.1 TDD	SR.1.1 TDD	SR.1.1 TDD
	2		SR.2.1 TDD	SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel	1		CR.1.1 TDD	CR.1.1 TDD	CR.1.1 TDD
	2		CR.2.1 TDD	CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET Reference Channel	1		CCR.1.1 TDD	CCR.1.1 TDD	CCR.1.1 TDD
	2		CCR.2.1 TDD	CCR.2.1 TDD	CCR.2.1 TDD
SSB configuration	1		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
	2		SSB.2 FR1	SSB.2 FR1	SSB.2 FR1
OCNG Patterns	1~2		OP.1	OP.1	OP.1
TRS configuration	1		TRS.1.1 TDD	TRS.1.1 TDD	TRS.1.1 TDD
	2		TRS.1.2 TDD	TRS.1.2 TDD	TRS.1.2 TDD
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~2		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~2		SMTC.1	SMTC.1	SMTC.1

Time offset between DL from serving cell and SRS from test system		1~2	μs	17.67	17.67	17.67
EPRE ratio of PSS to SSS		1~2	dB	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS Note 1						
EPRE ratio of OCNG to OCNG DMRS Note 1						
N_{oc} Note2	NR_TDD_FR1_A NOTE 3	1	dBm/15kHz	-106	-88	-114
	NR_TDD_FR1_C					-113
	NR_TDD_FR1_D					-112.5
	NR_TDD_FR1_E					-112
	NR_TDD_FR1_A NOTE 5	2		Not applicable Note 4	-91	-114
	NR_TDD_FR1_C					-113
	NR_TDD_FR1_D					-112.5
	NR_TDD_FR1_E					-112
N_{oc} Note2	NR_TDD_FR1_A NOTE 3	1	dBm/SRS SCS	-106	-88	-114
	NR_TDD_FR1_C					-113
	NR_TDD_FR1_D					-112.5
	NR_TDD_FR1_E					-112
	NR_TDD_FR1_A NOTE 3	2		Not applicable Note 4	-88	-111
	NR_TDD_FR1_C					-110
	NR_TDD_FR1_D					-109.5
	NR_TDD_FR1_E					-109

Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification
Note 4: Test 1 is not used when testing with 30kHz SSB SCS

Table A.6.7.8.1.2-2: FR1 test parameters for SRS-RSRP accuracy for neighbour cell UE

Parameter		Config	Unit	Test 1	Test 2	Test 3
N_{oc} Note2	NR_TDD_FR1_A NOTE 5	1	dBm/15kHz	-106	-88	-114
	NR_TDD_FR1_C					-113
	NR_TDD_FR1_D					-112.5

	NR_TDD_FR1_E					-112
	NR_TDD_FR1_A NOTE 5	2		Not applicable Note 6	-91	-114
	NR_TDD_FR1_C					-113
	NR_TDD_FR1_D					-112.5
	NR_TDD_FR1_E					-112
N_{oc} Note2	NR_TDD_FR1_A NOTE 5	1	dBm/SRS SCS	-106	-88	-114
	NR_TDD_FR1_C					-113
	NR_TDD_FR1_D					-112.5
	NR_TDD_FR1_E					-112
	NR_TDD_FR1_A NOTE 5	2		Not applicable Note 6	-88	-111
	NR_TDD_FR1_C					-110
	NR_TDD_FR1_D					-109.5
	NR_TDD_FR1_E					-109
$\hat{E}_s/I_{ot}$ on SRS		1~2	dB	1	1	1
SRS RSRP Note3	NR_TDD_FR1_A NOTE 5	1	dBm/SRS SCS	-105	-87	-113
	NR_TDD_FR1_C					-112
	NR_TDD_FR1_D					-111.5
	NR_TDD_FR1_E					-111
	NR_TDD_FR1_A NOTE 5	2		Not applicable Note 6	-87	-110
	NR_TDD_FR1_C					-109
	NR_TDD_FR1_D					-108.5
	NR_TDD_FR1_E					-108
Io Note3	NR_TDD_FR1_A NOTE 5	1	dBm/9.36 MHz	-74.51	-56.51	-82.51
	NR_TDD_FR1_C					-81.51
	NR_TDD_FR1_D					-81.01
	NR_TDD_FR1_E					-79.51
	NR_TDD_FR1_A NOTE 5	2	dBm/38.16 MHz	Not applicable Note 6	-53.42	-76.42
	NR_TDD_FR1_C					-75.42
	NR_TDD_FR1_D					-74.92
	NR_TDD_FR1_E					-74.42
$\hat{E}_s/N_{oc}$ on SRS		1~2	dB	1	1	1
Propagation condition		1~2		AWGN	AWGN	AWGN
Antenna configuration		1~2		1x2	1x2	1x2
SRS configuration		1		SRSConf.1	SRSConf.1	SRSConf.1
		2		SRSConf.2	SRSConf.2	SRSConf.2

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of the test.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification
Note 6: Test 1 is not used when testing with 30kHz SSB SCS

Table A.6.7.8.1.2-3: SRS configuration parameters for FR1 SRS-RSRP accuracy

	Field	SRSConf.1	SRSConf.2
SRS-ResourceSet	srs-ResourceSetId	0	0
	srs-ResourceIdList	0	0
	resourceType	Periodic	Periodic
	Usage	Codebook	Codebook
SRS-Resource	SRS-ResourceId	0	0
	nrofSRS-Ports	Port1	Port1
	transmissionComb	n2	n2
	combOffset-n2	0	0
	cyclicShift-n2	0	0
	resourceMapping startPosition	0	0
	resourceMapping nrofSymbols	n1	n1
	resourceMapping repetitionFactor	n1	n1
	freqDomainPosition	0	0
	freqDomainShift	0	0
	freqHopping c-SRS	12	12
	freqHopping b-SRS	0	0
	freqHopping b-hop	0	0
	groupOrSequenceHopping	Neither	Neither
	resourceType	Periodic	Periodic
	periodicityAndOffset-p	sl20, 9	sl40, 19
	sequenceId	0	0

A.6.7.8.1.3 Test Requirements

The SRS-RSRP measurement accuracy shall fulfil the requirements in clauses 10.1.22.1.1.

A.6.7.8.2 SA CLI-RSSI measurement accuracy with FR1 serving cell

A.6.7.8.2.1 Test Purpose and Environment

The purpose of this test is to verify that the CLI-RSSI measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 10.1.22.2.1 with the testing configurations for NR cells in Table A.6.7.8.2.1-1.

Table A.6.7.8.2.1-1: Applicable NR configurations for FR1 CLI-RSSI accuracy test

Config	Description
1	NR 15 kHz SRS SCS, 10 MHz bandwidth, TDD duplex mode
2	NR 30kHz SRS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.6.7.8.2.2 Test parameters

In this set of test cases there is one cell in the test, the FR1 PSCell (Cell 1). The test parameters for the Cell 1 are given in Table A.6.7.8.2.2-1 below.

Before the test UE is configured to perform CLI-RSSI measurement. There is no measurement gap configured in the test. During the test, the test system does not transmit PDCCH/PDSCH/OCNG on symbols for CLI-RSSI resource and on 1 data symbol before. The CLI-RSSI measurement resource configuration is in Table A.6.7.8.2.2-2.

Table A.6.7.8.2.2-1: FR1 test parameters for CLI-RSSI accuracy

Parameter	Config	Unit	Value
SSB GSCN	1~2		freq1
Duplex mode	1~2		TDD
TDD configuration	1		TDDConf.1.1
	2		TDDConf.2.1
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52
	2		40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1		SR.1.1 TDD
	2		SR.2.1 TDD
RMSI CORESET Reference Channel	1		CR.1.1 TDD
	2		CR.2.1 TDD
Dedicated CORESET Reference Channel	1		CCR.1.1 TDD
	2		CCR.2.1 TDD
SSB configuration	1		SSB.1 FR1
	2		SSB.2 FR1
OCNG Patterns Note6	1~2		OP.1
TRS configuration	1		TRS.1.1 TDD
	2		TRS.1.2 TDD
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~2		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~2		SMTC.1
Time offset between DL from serving cell and OCNG from test system	1~2	μs	17.67
EPRE ratio of PSS to SSS	1~2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} on CLI-RSSI measurement resource Note2	1	dBm/15kHz	-106
	2		-106

N_{oc} on CLI-RSSI measurement resource Note2	1	dBm/ BWP SCS	-106
	2		-103
$\hat{E}_s/I_{ot}$ on CLI-RSSI measurement resource	1~2	dB	-Infinity
RSRP on CLI-RSSI measurement resource Note3	1~2	dBm/ BWP SCS	-Infinity
Io on CLI-RSSI measurement resource Note3	1	dBm/9.36 MHz	-78.05
	2	dBm/38.16 MHz	-71.96
Io on CLI-RSSI measurement resource Note3	1	dBm/1.08 MHz	-87.43
	2		-87.44
$\hat{E}_s/N_{oc}$ on CLI-RSSI measurement resource	1~2	dB	-Infinity
Propagation condition	1~2		AWGN
Antenna configuration	1~2		1x2

Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification
Note 6: OCNG is not transmitted in the CLI-RSSI measurement resources.

Table A.6.7.8.2.2-2: CLI-RSSI measurement resource configuration for FR1 CLI-RSSI accuracy

	Field	Config	SRSConf.1
CLI-RSSI measurement resource	rssi-ResourceId	1~2	0
	rssi-SCS	1	15kHz
		2	30kHz
	startPRB	1~2	0
	nrofPRBs	1	52
		2	106
	startPosition	1~2	3
	nrofSymbols	1~2	11
	rssi-PeriodicityAndOffset	1	sl20, 9
		2	sl40, 19

A.6.7.8.2.3 Test Requirements

The CLI-RSSI measurement accuracy shall fulfil the requirements in clauses 10.1.22.2.1.

A.6.7.9 L1-SINR measurement for beam reporting

A.6.7.9.1 L1-SINR measurement with CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off

A.6.7.9.1.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 9.8.4.1 and clause 10.1.27.1 for L1-SINR measurements based on CSI-RS with the testing configurations for NR cells in Table A.6.7.9.1.1-1.

Table A.6.7.9.1.1-1: Applicable NR configurations for FR1 L1-SINR test with CSI-RS based CMR and no dedicated IMR configured

Config	Description
1	NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.6.7.9.1.2 Test parameters

In this set of test cases there are one cell in the test, PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.6.7.9.1.2-1 below. The absolute and relative accuracy of L1-SINR measurements are tested by using the parameters in Table A.6.7.9.1.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured one CSI-RS resource set with two CSI-RS resources. UE is configured to perform RLM and BFD based on SSB 0 and 1. CSI-RS is not transmitted in the same OFDM symbols as SSB.

Table A.6.7.9.1.2-1: FR1 CSI-RS based L1-SINR test parameters

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1~3		freq1	freq1
Duplex mode	1		FDD	FDD
	2		TDD	TDD
	3		TDD	TDD
TDD Configuration	1		N/A	N/A
	2		TDDConf.1.1	TDDConf.1.1
	3		TDDConf.2.1	TDDConf.2.1
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
	2		10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
	3		40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1		SR.1.1 FDD	SR.1.1 FDD
	2		SR.1.1 TDD	SR.1.1 TDD
	3		SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel	1		CR.1.1 FDD	CR.1.1 FDD
	2		CR.1.1 TDD	CR.1.1 TDD
	3		CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD	CCR.1.1 FDD
	2		CCR.1.1 TDD	CCR.1.1 TDD
	3		CCR.2.1 TDD	CCR.2.1 TDD
SSB configuration	1		SSB.1 FR1	SSB.1 FR1
	2		SSB.1 FR1	SSB.1 FR1
	3		SSB.2 FR1	SSB.2 FR1
OCNG Patterns	1~3		OP.1	OP.1

TRS configuration		1		TRS.1.1 FDD	TRS.1.1 FDD
		2		TRS.1.1 TDD	TRS.1.1 TDD
		3		TRS.1.2 TDD	TRS.1.2 TDD
Initial BWP Configuration		1~3		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration		1~3		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
SMTC configuration		1~3		SMTC.1	SMTC.1
CSI-RS		1		CSI-RS 1.2 FDD	CSI-RS 1.2 FDD
		2		CSI-RS 1.2 TDD	CSI-RS 1.2 TDD
		3		CSI-RS 2.2 TDD	CSI-RS 2.2 FDD
reportConfigType		1~3		periodic	periodic
reportQuantity-r16		1~3		cri-SINR-r16	cri-SINR-r16
nrofReportedRS		1~3		2	2
L1-SINR reporting period		1~3		slot80	slot80
EPRE ratio of PSS to SSS		1~3	dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1~3	dBm/15kHz	-94.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2	dBm/CSI-RS SCS	-94.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3		-91.65	-114
	NR_FDD_FR1_B				-113.5

	NR_TDD_FR1_C				-114
	NR_FDD_FR1_D, NR_TDD_FR1_D				-112.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-112
	NR_FDD_FR1_F				-111.5
	NR_FDD_FR1_G				-111
	NR_FDD_FR1_H				-110.5
$\hat{E}_s/I_{ot}$		1~3	dB	10	-3
CSI-RS RSRP Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2	dBm/CSI-RS SCS	-84.65	-120
	NR_FDD_FR1_B				-119.5
	NR_TDD_FR1_C				-119
	NR_FDD_FR1_D, NR_TDD_FR1_D				-118.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-118
	NR_FDD_FR1_F				-117.5
	NR_FDD_FR1_G				-117
	NR_FDD_FR1_H				-116.5
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3		-81.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
Io Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2	dBm/9.36 MHz	-56.28	-87.28
	NR_FDD_FR1_B				-86.78
	NR_TDD_FR1_C				-86.28
	NR_FDD_FR1_D, NR_TDD_FR1_D				-85.78
	NR_FDD_FR1_E, NR_TDD_FR1_E				-85.28
	NR_FDD_FR1_F				-84.78
	NR_FDD_FR1_G				-84.28
	NR_FDD_FR1_H				-83.78
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3	dBm/38.16 MHz	-50.19	-81.19
	NR_FDD_FR1_B				-80.69
	NR_TDD_FR1_C				-80.19
	NR_FDD_FR1_D, NR_TDD_FR1_D				-79.69
	NR_FDD_FR1_E, NR_TDD_FR1_E				-79.19
	NR_FDD_FR1_F				-78.69
	NR_FDD_FR1_G				-78.19
	NR_FDD_FR1_H				-77.69
$\hat{E}_s/N_{oc}$		1~3	dB	10	-3
Propagation condition		1~3		AWGN	AWGN

Antenna configuration	1~3		1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				
Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.				

A.6.7.9.1.3 Test Requirements

The L1-SINR measurement accuracy for CSI-RS#0 and CSI-RS#1 of Cell 1 shall fulfil the requirements in clause 10.1.27.1.

A.6.7.9.2 L1-SINR measurement with SSB based CMR and dedicated IMR

A.6.7.9.2.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 9.8.4.2 and clause 10.1.27.2 for L1-SINR measurements with SSB based CMR and dedicated CSI-RS based IMR, with the testing configurations for NR cells in Table A.6.7.9.2.1-1.

Table A.6.7.9.2.1-1: Applicable NR configurations for FR1 L1-SINR measurement test with SSB based CMR and CSI-RS based IMR

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.6.7.9.2.2 Test parameters

In this set of test cases there one cell in the test, PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.6.7.9.2.2-1 below. The absolute accuracy of L1-SINR measurements are tested by using the parameters in Table A.6.7.9.2.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured one SSB resource set with two SSB resources and one CSI-RS resource set with two CSI-RS resource. UE is configured to perform RLM and BFD measurement based on the SSB resources 0 and 1. UE is configured to perform L1-SINR measurement based on the SSBs as CMR and the CSI-RS resources as IMR.

Table A.6.7.9.2.2-1: FR1 SSB based L1-SINR test parameters

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1~3		freq1	freq1
Duplex mode	1		FDD	FDD
	2		TDD	TDD
	3		TDD	TDD
TDD Configuration	1		N/A	N/A
	2		TDDConf.1.1	TDDConf.1.1
	3		TDDConf.2.1	TDDConf.2.1

$BW_{channel}$		1	MHz	10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
		2		10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
		3		40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel		1		SR.1.1 FDD	SR.1.1 FDD
		2		SR.1.1 TDD	SR.1.1 TDD
		3		SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel		1		CR.1.1 FDD	CR.1.1 FDD
		2		CR.1.1 TDD	CR.1.1 TDD
		3		CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET Reference Channel		1		CCR.1.1 FDD	CCR.1.1 FDD
		2		CCR.1.1 TDD	CCR.1.1 TDD
		3		CCR.2.1 TDD	CCR.2.1 TDD
SSB configuration		1		SSB.3 FR1	SSB.3 FR1
		2		SSB.3 FR1	SSB.3 FR1
		3		SSB.4 FR1	SSB.4 FR1
CSI-RS configuration		1		CSI-RS 1.1A FDD	CSI-RS 1.1A FDD
		2		CSI-RS 1.1A TDD	CSI-RS 1.1A TDD
		3		CSI-RS 2.1A TDD	CSI-RS 2.1A TDD
OCNG Patterns		1~3		OP.1	OP.1
Initial BWP Configuration		1~3		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
TRS configuration		1		TRS.1.1 FDD	TRS.1.1 FDD
		2		TRS.1.1 TDD	TRS.1.1 TDD
		3		TRS.1.2 TDD	TRS.1.2 TDD
Dedicated BWP configuration		1~3		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
SMTC configuration		1~3		SMTC.1	SMTC.1
reportConfigType		1~3		periodic	periodic
reportQuantity-r16		1~3		ssb-Index-SINR-r16	ssb-Index-SINR-r16
Number of reported RS		1~3		2	2
L1-SINR reporting period		1~3		slot80	slot80
EPRE ratio of PSS to SSS		1~3	dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1~3	dBm/15kHz	-94.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116

	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2	dBm/SSB SCS	-94.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3		-91.65	-114
	NR_FDD_FR1_B				-113.5
	NR_TDD_FR1_C				-114
	NR_FDD_FR1_D, NR_TDD_FR1_D				-112.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-112
	NR_FDD_FR1_F				-111.5
	NR_FDD_FR1_G				-111
	NR_FDD_FR1_H				-110.5
$\hat{E}_s/I_{ot}$		1~3	dB	10	0
$\hat{E}_s/N_{oc}$		1~6	dB	10	0
SSB RSRP Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2	dBm/SSB SCS	-84.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3		-81.65	-114
	NR_FDD_FR1_B				-113.5
	NR_TDD_FR1_C				-114
	NR_FDD_FR1_D, NR_TDD_FR1_D				-112.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-112
	NR_FDD_FR1_F				-111.5
	NR_FDD_FR1_G				-111
	NR_FDD_FR1_H				-110.5

CSI-RS RSRP Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2	dBm/CSI-RS SCS	-84.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3		-81.65	-114
	NR_FDD_FR1_B				-113.5
	NR_TDD_FR1_C				-113
	NR_FDD_FR1_D, NR_TDD_FR1_D				-112.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-112
	NR_FDD_FR1_F				-111.5
	NR_FDD_FR1_G				-111
	NR_FDD_FR1_H				-110.5
Io Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2	dBm/9.36 MHz	-56.28	-86.04
	NR_FDD_FR1_B				-85.54
	NR_TDD_FR1_C				-85.04
	NR_FDD_FR1_D, NR_TDD_FR1_D				-84.54
	NR_FDD_FR1_E, NR_TDD_FR1_E				-84.04
	NR_FDD_FR1_F				-83.54
	NR_FDD_FR1_G				-83.04
	NR_FDD_FR1_H				-82.54
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3	dBm/38.16 MHz	-50.19	-79.94
	NR_FDD_FR1_B				-79.44
	NR_TDD_FR1_C				-78.94
	NR_FDD_FR1_D, NR_TDD_FR1_D				-78.44
	NR_FDD_FR1_E, NR_TDD_FR1_E				-77.94
	NR_FDD_FR1_F				-77.44
	NR_FDD_FR1_G				-76.94
	NR_FDD_FR1_H				-76.44
Propagation condition		1~3		AWGN	AWGN
Antenna configuration		1~3		1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4:	RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

A.6.7.9.2.3 Test Requirements

The L1-SINR measurement accuracy for SSB#0+CSI-RS#0 and SSB#1+CSI-RS#1 of Cell 1 shall fulfil the requirements in clauses 10.1.27.2.

A.6.7.9.3 L1-SINR measurement with CSI-RS based CMR and dedicated IMR

A.6.7.9.3.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-SINR measurement accuracy is within the specified limits. This test will partly verify the requirements in Clauses 9.8.4.3 and clause 10.1.27.3 for L1-SINR measurements based on CSI-RS as CMR and CSI-IM as IMR with the testing configurations for NR cells in Table A.6.7.9.3.1-1.

Table A.6.7.9.3.1-1: Applicable NR configurations for FR1 L1-SINR measurement test with CSI-RS based CMR and CSI-IM based IMR

Config	Description
1	NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.6.7.9.3.2 Test parameters

In this set of test cases there are one cell in the test, PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.6.7.9.3.2-1 below. The absolute and relative accuracy of L1-SINR measurements are tested by using the parameters in Table A.6.7.9.3.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured one CSI-RS resource set with two CSI-RS resources and one CSI-IM resource set with two CSI-IM resources. UE is configured to perform RLM and BFD based on SSB 0 and 1. CSI-RS is not transmitted in the same OFDM symbols as SSB. UE is configured to perform L1-SINR measurement based on the configured CSI-RS as CMR and CSI-IM as IMR.

Table A.6.7.9.3.2-1: FR2 L1-SINR measurement test with CSI-RS based CMR and CSI-IM based IMR

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1~3		freq1	freq1
Duplex mode	1		FDD	FDD
	2		TDD	TDD
	3		TDD	TDD
TDD Configuration	1		N/A	N/A
	2		TDDConf.1.1	TDDConf.1.1
	3		TDDConf.2.1	TDDConf.2.1
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
	2		10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
	3		40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1		SR.1.1 FDD	SR.1.1 FDD

		2		SR.1.1 TDD	SR.1.1 TDD
		3		SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel		1		CR.1.1 FDD	CR.1.1 FDD
		2		CR.1.1 TDD	CR.1.1 TDD
		3		CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET Reference Channel		1		CCR.1.1 FDD	CCR.1.1 FDD
		2		CCR.1.1 TDD	CCR.1.1 TDD
		3		CCR.2.1 TDD	CCR.2.1 TDD
SSB configuration		1		SSB.1 FR1	SSB.1 FR1
		2		SSB.1 FR1	SSB.1 FR1
		3		SSB.2 FR1	SSB.2 FR1
OCNG Patterns		1~3		OP.1	OP.1
TRS configuration		1		TRS.1.1 FDD	TRS.1.1 FDD
		2		TRS.1.1 TDD	TRS.1.1 TDD
		3		TRS.1.2 TDD	TRS.1.2 TDD
Initial BWP Configuration		1~3		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration		1~3		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
SMTC configuration		1~3		SMTC.1	SMTC.1
CSI-RS configuration as CMR		1		CSI-RS 1.2 FDD	CSI-RS 1.2 FDD
		2		CSI-RS 1.2 TDD	CSI-RS 1.2 TDD
		3		CSI-RS 2.2 TDD	CSI-RS 2.2 FDD
CSI-IM configuration as IMR		1		CSI-IM 1.3 FDD	CSI-IM 1.3 FDD
		2		CSI-IM 1.3 TDD	CSI-IM 1.3 TDD
		3		CSI-IM 2.3 TDD	CSI-IM 2.3 TDD
reportConfigType		1~3		periodic	periodic
reportQuantity-r16		1~3		cri-SINR-r16	cri-SINR-r16
nrofReportedRS		1~3		2	2
L1-RSRP reporting period		1~3		slot80	slot80
EPRE ratio of PSS to SSS		1~3	dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1~3	dBm/15kHz	-94.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114

	NR_FDD_FR1_H				-113.5
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2	dBm/CSI-RS SCS	-94.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3		-91.65	-114
	NR_FDD_FR1_B				-113.5
	NR_TDD_FR1_C				-114
	NR_FDD_FR1_D, NR_TDD_FR1_D				-112.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-112
	NR_FDD_FR1_F				-111.5
	NR_FDD_FR1_G				-111
	NR_FDD_FR1_H				-110.5
$\hat{E}_s/I_{ot}$		1~3	dB	10	-3
CSI-RS RSRP Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2	dBm/CSI-RS SCS	-84.65	-120
	NR_FDD_FR1_B				-119.5
	NR_TDD_FR1_C				-119
	NR_FDD_FR1_D, NR_TDD_FR1_D				-118.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-118
	NR_FDD_FR1_F				-117.5
	NR_FDD_FR1_G				-117
	NR_FDD_FR1_H				-116.5
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3		-81.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
Io Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2	dBm/9.36 MHz	-56.28	-87.28
	NR_FDD_FR1_B				-86.78
	NR_TDD_FR1_C				-86.28
	NR_FDD_FR1_D, NR_TDD_FR1_D				-85.78
	NR_FDD_FR1_E, NR_TDD_FR1_E				-85.28
	NR_FDD_FR1_F				-84.78

	NR_FDD_FR1_G				-84.28
	NR_FDD_FR1_H				-83.78
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3	dBm/38.16 MHz	-50.19	-81.19
	NR_FDD_FR1_B				-80.69
	NR_TDD_FR1_C				-80.19
	NR_FDD_FR1_D, NR_TDD_FR1_D				-79.69
	NR_FDD_FR1_E, NR_TDD_FR1_E				-79.19
	NR_FDD_FR1_F				-78.69
	NR_FDD_FR1_G				-78.19
	NR_FDD_FR1_H				-77.69
$\hat{E}_s/N_{oc}$		1~3	dB	10	-3
Propagation condition		1~3		AWGN	AWGN
Antenna configuration		1~3		1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

A.6.7.9.3.3 Test Requirements

The L1-SINR measurement accuracy for CSI-RS#0+CSI-IM#0 and CSI-RS#1+CSI-IM# of Cell 1 shall fulfil the requirements in clause 10.1.27.3.

A.6.7.10 CSI-RSRP

A.6.7.10.1 SA: intra-frequency case measurement accuracy with FR1 serving cell and FR1 target cell

A.6.7.9.10.1 Test Purpose and Environment

The purpose of this test is to verify that the CSI-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1.2.3.1 and 10.1.2.3.2 for CSI-RS intra-frequency measurements.

A.6.7.9.10.2 Test parameters

In this set of test cases all cells are on the same carrier frequency. Supported test configurations are shown in table A.6.7.10.1.2-1. Both absolute and relative accuracy of CSI-RSRP intra-frequency measurements are tested by using the parameters in A.6.7.10.1.2-2. In all test cases, Cell 1 is the PCell, and Cell 2 is the target cell.

Table A.6.7.10.1.2-1: CSI-RSRP intra frequency supported test configurations

Config	Description
1	NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table A.6.7.10.1.2-2: CSI-RSRP intra frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
Cell ID			489	0	489	0	489	0
SSB ARFCN			freq1		freq1		freq1	
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
TDD configuration	Config 1		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52					
	Config 2		10: $N_{RB,c}$ = 52					
	Config 3		40: $N_{RB,c}$ = 106					
BWP BW	Config 1		10: $N_{RB,c}$ = 52					
	Config 2		10: $N_{RB,c}$ = 52					
	Config 3		40: $N_{RB,c}$ = 106					
Downlink initial BWP configuration			DLBWP.0.1					
Downlink dedicated BWP configuration			DLBWP.1.1					
Uplink initial BWP configuration			ULBWP.0.1					
Uplink dedicated BWP configuration			ULBWP.1.1					
TRS configuration	Config 1		TRS.1.1 FDD	NA	TRS.1.1 FDD	NA	TRS.1.1 FDD	NA
	Config 2		TRS.1.1 TDD	NA	TRS.1.1 TDD	NA	TRS.1.1 TDD	NA
	Config 3		TRS.1.2 TDD	NA	TRS.1.2 TDD	NA	TRS.1.2 TDD	NA
DRX Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3		SR.2.1 TDD		SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	-
	Config 2		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
	Config 3		CR.2.1 TDD		CR.2.1 TDD		CR.2.1 TDD	
Control channel RMC	Config 1		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD	

		Config 3		CCR2.1 TDD		CCR2.1 TDD		CCR2.1 TDD	
SSB configuration		Config 1		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
		Config 2		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
		Config 3		SSB.2 FR1	SSB.2 FR1	SSB.2 FR1	SSB.2 FR1	SSB.2 FR1	SSB.2 FR1
Time offset with Cell 1		Config 1,2	µs	-	4.7	-	4.7	-	4.7
		Config 3	µs	-	2.35	-	2.35	-	2.35
SMTC configuration		Config 1		SMTC.2					
		Config 2,3		SMTC.1					
CSI-RS configuration for RRM		Config 1		CSI-RS.RRM.FR1.1 FDD					
		Config 2		CSI-RS.RRM.FR1.1 TDD					
		Config 3		CSI-RS.RRM.FR1.2 TDD					
OCNG Patterns				OCNG pattern 1					
PDSCH/PDCCH subcarrier spacing		Config 1,2	kHz	15 kHz					
		Config 3		30kHz					
EPRE ratio of PSS to SSS EPRE ratio of PBCH DMRS to SSS EPRE ratio of PBCH to PBCH DMRS EPRE ratio of PDCCH DMRS to SSS EPRE ratio of PDCCH to PDCCH DMRS EPRE ratio of PDSCH DMRS to SSS EPRE ratio of PDSCH to PDSCH EPRE ratio of OCNG DMRS to SSS(Note 1) EPRE ratio of OCNG to OCNG DMRS (Note 1)			dB	0	0	0	0	0	0
N_{oc} Note2	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/15KhZ	-106		-88		-114	
		NR_FDD_FR1_B						-113.5	
		NR_TDD_FR1_C						-113	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-112.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-112	
		NR_FDD_FR1_F						-111.5	
		NR_FDD_FR1_G						-111	
		NR_FDD_FR1_H						-110.5	
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		Not applicable Note 5		-94		-114	
		NR_FDD_FR1_B						-113.5	
		NR_TDD_FR1_C						-113	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-112.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-112	
		NR_FDD_FR1_F						-111.5	
		NR_FDD_FR1_G						-111	
		NR_FDD_FR1_H						-110.5	
N_{oc} Note2	Config 1,2		dBm/SCS	-106		-88		Same as Noc/15kHz	
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		Not applicable Note 5		-91		-111	

		NR_FDD_FR1_B						-110.5	
		NR_TDD_FR1_C						-110	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-109.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-109	
		NR_FDD_FR1_F						-108.5	
		NR_FDD_FR1_G						-108	
		NR_FDD_FR1_H						-107.5	
$\hat{E}_s/I_{ot}$			dB	2.46	-5.97	2.46	-5.97	-0.01	-4.76
$\hat{E}_s/N_{oc}$			dB	6	1	6	1	3	0
CSI-RSRP[Note3]	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/SCS	-100	-105	-82	-87	-111.00	-114.00
		NR_FDD_FR1_B						-110.50	-113.50
		NR_TDD_FR1_C						-110.00	-113.00
		NR_FDD_FR1_D, NR_TDD_FR1_D						-109.50	-112.50
		NR_FDD_FR1_E, NR_TDD_FR1_E						-109.00	-112.00
		NR_FDD_FR1_F						-108.50	-111.50
		NR_FDD_FR1_G						-108.00	-111.00
		NR_FDD_FR1_H						-107.50	-110.50
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		Not applicable[Note 5]	Not applicable[Note 5]	-85	-90	-108.00	-111.00
		NR_FDD_FR1_B						-107.50	-110.50
		NR_TDD_FR1_C						-107.00	-110.00
		NR_FDD_FR1_D, NR_TDD_FR1_D						-106.50	-109.50
		NR_FDD_FR1_E, NR_TDD_FR1_E						-106.00	-109.00
		NR_FDD_FR1_F						-105.50	-108.50
		NR_FDD_FR1_G						-105.00	-108.00
		NR_FDD_FR1_H						-104.50	-107.50
Io[Note3]	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 9.36MHz	-70.09		-52.09		-80.03	
		NR_FDD_FR1_B						-79.53	
		NR_TDD_FR1_C						-79.03	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-78.53	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-78.03	
		NR_FDD_FR1_F						-77.53	
		NR_FDD_FR1_G						-77.03	

		NR_FDD_FR1_H				-76.53
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 38.16MHz	Not applicable Note 5	-51.99	-73.94
		NR_FDD_FR1_B				-73.44
		NR_TDD_FR1_C				-72.94
		NR_FDD_FR1_D, NR_TDD_FR1_D				-72.44
		NR_FDD_FR1_E, NR_TDD_FR1_E				-71.94
		NR_FDD_FR1_F				-71.44
		NR_FDD_FR1_G				-70.94
		NR_FDD_FR1_H				-70.44
Propagation condition			-	AWGN		
Antenna configuration				1x2		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: CSI-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: Subtest 1 is not used when testing with 30kHz SSB and CSI-RS SCS.
Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification

A.6.7.10.1.3 Test Requirements

The CSI-RSRP measurement accuracy for cell 1 and cell 2 shall fulfil absolute requirement in clause 10.1.2.3.1 and relative requirement in clause 10.1.2.3.2.

A.6.7.10.2 SA inter-frequency case measurement accuracy with FR1 serving cell and FR1 target cell

A.6.7.9.10.1 Test Purpose and Environment

The purpose of this test is to verify that the CSI-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1.4.3.1 and 10.1.4.3.2 for CSI-RS inter-frequency measurements with the testing configurations for NR cells in Table A.6.7.9.2.1-1.

Table A.6.7.10.2.1-1: Applicable NR configurations for FR1 inter-frequency CSI-RSRP accuracy test

Config	Description
1	NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.6.7.10.2.2 Test parameters

In this set of test cases there are two cells in the test, PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on a different frequency than the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.6.7.10.2.2-1 below.

Both absolute and relative accuracy of CSI-RSRP inter-frequency measurements are tested by using the parameters in Table A.6.7.10.2.2-1. The inter-frequency measurements are supported by a measurement gap.

Table A.6.7.10.2.2-1: CSI-RSRP inter-frequency test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN	1~3		freq1	freq2	freq1	freq2
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
	2		10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
	3		40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
Duplex mode	1		FDD		FDD	
	2		TDD		TDD	
	3		TDD		TDD	
TDD configuration	1		N/A		N/A	
	2		TDDConf.1.1		TDDConf.1.1	
	3		TDDConf.2.1		TDDConf.2.1	
PDSCH Reference measurement channel	1		SR.1.1 FDD	-	SR.1.1 FDD	-
	2		SR.1.1 TDD		SR.1.1 TDD	
	3		SR.2.1 FDD		SR.2.1 FDD	
RMSI CORESET Reference Channel	1		CR.1.1 FDD	-	CR.1.1 FDD	-
	2		CR.1.1 TDD	-	CR.1.1 TDD	-
	3		CR.2.1 FDD	-	CR.2.1 FDD	-
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	2		CCR.1.1 TDD	-	CCR.1.1 TDD	-
	3		CCR.2.1 TDD	-	CCR.2.1 TDD	-
SSB configuration	1		SSB.1 FR1		SSB.1 FR1	
	2		SSB.1 FR1		SSB.1 FR1	
	3		SSB.2 FR1		SSB.2 FR1	
OCNG Patterns	1~3		OP.1		OP.1	
TRS configuration	1		TRS.1.1 FDD	-	TRS.1.1 FDD	
	2		TRS.1.1 TDD		TRS.1.1 TDD	
	3		TRS.1.2 TDD		TRS.1.2 TDD	
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1		DLBWP.1.1 ULBWP.1.1	
Time offset with Cell 1	1,2	µs	-	4.7	-	4.7
	3	µs	-	2.35	-	2.35
SMTC configuration	1		SMTC.2		SMTC.2	
	2,3		SMTC.1		SMTC.1	
CSI-RS configuration for RRM	1		CSI-RS.RRM.FR1.1 FDD		CSI-RS.RRM.FR1.1 FDD	
	2		CSI-RS.RRM.FR1.1 TDD		CSI-RS.RRM.FR1.1 TDD	
	3		CSI-RS.RRM.FR1.2 TDD		CSI-RS.RRM.FR1.2 TDD	
EPRE ratio of PSS to SSS	1~3	dB	0	0	0	0

EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH DMRS							
EPRE ratio of OCNG DMRS to SSSNote 1							
EPRE ratio of OCNG to OCNG DMRS Note 1							
N_{oc} Note2	NR_FDD_FR1_A , NR_TDD_FR1_A NOTE 5	1~3	dBm/15 kHz	-94.65		(N_{oc} for Channel 2 +8dB)	-115
	NR_FDD_FR1_B						-114.5
	NR_TDD_FR1_C						-114
	NR_FDD_FR1_D , NR_TDD_FR1_D						-113.5
	NR_FDD_FR1_E , NR_TDD_FR1_E						-113
	NR_FDD_FR1_F						-112.5
	NR_FDD_FR1_G						-112
	NR_FDD_FR1_H						-111.5
N_{oc} Note2	NR_FDD_FR1_A , NR_TDD_FR1_A NOTE 5,	1,2	dBm/SS B SCS	-94.65		(N_{oc} for Channel 2 +8dB)	-115
	NR_FDD_FR1_B						-114.5
	NR_TDD_FR1_C						-114
	NR_FDD_FR1_D , NR_TDD_FR1_D						-113.5
	NR_FDD_FR1_E , NR_TDD_FR1_E						-113
	NR_FDD_FR1_F						-112.5
	NR_FDD_FR1_G						-112
	NR_FDD_FR1_H						-111.5
	NR_FDD_FR1_A , NR_TDD_FR1_A NOTE 5,	3		-91.65		(N_{oc} for Channel 2 +8dB)	-112.00
	NR_FDD_FR1_B						-112.50
	NR_TDD_FR1_C						-112.00
	NR_FDD_FR1_D , NR_TDD_FR1_D						-111.50
	NR_FDD_FR1_E , NR_TDD_FR1_E						-111.00
	NR_FDD_FR1_F						-110.50
	NR_FDD_FR1_G						-110.00
	NR_FDD_FR1_H						-110.50

$\hat{E}_s/I_{ot}$		1~3	dB	10	10	13	-3
CSI-RSRP[Note3]	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5,	1,2	dBm/SCS	-84.65		(RSRP for Cell 2 +25dB)	-118.00
	NR_FDD_FR1_B						-117.50
	NR_TDD_FR1_C						-117.00
	NR_FDD_FR1_D, NR_TDD_FR1_D						-116.50
	NR_FDD_FR1_E, NR_TDD_FR1_E						-116.00
	NR_FDD_FR1_F						-115.50
	NR_FDD_FR1_G						-115.00
	NR_FDD_FR1_H						-114.50
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5,	3		-81.65		(RSRP for Cell 2 +25dB)	-115.00
	NR_FDD_FR1_B						-114.50
	NR_TDD_FR1_C						-114.00
	NR_FDD_FR1_D, NR_TDD_FR1_D						-113.50
	NR_FDD_FR1_E, NR_TDD_FR1_E						-113.00
	NR_FDD_FR1_F						-112.50
	NR_FDD_FR1_G						-112.00
	NR_FDD_FR1_H						-111.50
Io[Note3]	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5,	1,2	dBm/ 9.36MHz	-56.28		Io for Channel 2 +19.75dB	-85.28
	NR_FDD_FR1_B						-84.78
	NR_TDD_FR1_C						-84.28
	NR_FDD_FR1_D, NR_TDD_FR1_D						-83.78
	NR_FDD_FR1_E, NR_TDD_FR1_E						-83.28
	NR_FDD_FR1_F						-82.78
	NR_FDD_FR1_G						-82.28
	NR_FDD_FR1_H						-81.78
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5,	3	dBm/ 38.16MHz	-50.19		Io for Channel 2 +19.75dB	-79.19
	NR_FDD_FR1_B						-78.69
	NR_TDD_FR1_C						-78.19
	NR_FDD_FR1_D, NR_TDD_FR1_D						-77.69
	NR_FDD_FR1_E, NR_TDD_FR1_E						-77.19
	NR_FDD_FR1_F						-76.69
	NR_FDD_FR1_G						-76.19

	NR_FDD_FR1_H						-75.69
$\hat{E}_s / N_{oc}$		1~3	dB	10	10	13	-3
Propagation condition		1~3	-	AWGN		AWGN	
Antenna configuration		1~3		1x2		1x2	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: CSI-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

A.6.7.10.2.3 Test Requirements

The CSI-RSRP measurement accuracy for Cell 1 and Cell 2 shall fulfil the absolute requirement in clause 10.1.4.3.1 and relative requirement in clause 10.1.4.3.2.

A.6.7.11 CSI-RSRQ

A.6.7.11.1 SA: Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.6.7.11.1.1 Test Purpose and Environment

The purpose of this test is to verify that the CSI-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.7.2.

A.6.7.11.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table A.6.7.11.1.2-1. The absolute accuracy of CSI-RSRQ intra-frequency measurement is tested by using the parameters in Table A.6.7.11.1.2-2. In all test cases, Cell 1 is the PCell and Cell 2 is the target cell.

Table A.6.7.11.1.2-1: Intra frequency CSI-RSRQ supported test configurations

Config	Description
1	NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.7.11.1.2-2: CSI-RSRQ Intra frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
TDD configuration	Config 1		Not Applicable					
	Config 2		TDDConf.1.1					

	Config 3		TDDConf.2.1						
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52						
	Config 2		10: $N_{RB,c}$ = 52						
	Config 3		40: $N_{RB,c}$ = 106						
Gap Pattern ID			0						
BWP configuration	Initial DL BWP		DLBWP.0.1						
	Dedicated DL BWP		DLBWP.1.1						
	Initial UL BWP		ULBWP.0.1						
	Dedicated UL BWP		ULBWP.1.1						
DRX Cycle		ms	Not Applicable						
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-	
	Config 2		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD		
	Config 3		SR.2.1 TDD		SR.2.1 TDD		SR.2.1 TDD		
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD		
	Config 2		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD		
	Config 3		CR.2.1 TDD		CR.2.1 TDD		CR.2.1 TDD		
Control Channel RMC	Config 1		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-	
	Config 2		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD		
	Config 3		CCR.2.1 TDD		CCR.2.1 TDD		CCR.2.1 TDD		
TRS Configuration	Config 1		TRS.1.1 FDD	-	TRS.1.1 FDD	-	TRS.1.1 FDD	-	
	Config 2		TRS.1.1 TDD		TRS.1.1 TDD		TRS.1.1 TDD		
	Config 3		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD		
OCNG Patterns			OP. 1						
Time offset with Cell 1	Config 1	µs	-	4.7	-	4.7	-	4.7	
	Config 2,3	µs	-	2.35	-	2.35	-	2.35	
CSI-RS configuration for RRM	Config 1		CSI-RS.RRM.FR1.1 FDD						
	Config 2		CSI-RS.RRM.FR1.1 TDD						
	Config 3		CSI-RS.RRM.FR1.2 TDD						
SMTC configuration	Config 1		SMTC.2						
	Config 2,3		SMTC.1						
SSB configuration	Config 1,2		SSB.1 FR1						
	Config 3		SSB.2 FR1						

PDSCH/PDCCH subcarrier spacing		Config 1,2	kHz	15 kHz					
		Config 3		30kHz					
EPRE ratio of PSS to SSS			dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 15kHz	-85		-101		-114	
		NR_FDD_FR1_B						-113.5	
		NR_TDD_FR1_C						-113	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-112.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-112	
		NR_FDD_FR1_F						-111.5	
		NR_FDD_FR1_G						-111	
		NR_FDD_FR1_H						-110.5	
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-91		-		-114	
		NR_FDD_FR1_B						-113.5	
		NR_TDD_FR1_C						-113	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-112.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-112	
		NR_FDD_FR1_F						-111.5	
		NR_FDD_FR1_G						-111	
		NR_FDD_FR1_H						-110.5	
N_{oc} Note2	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ SCS	-85		-101		-114	
		NR_FDD_FR1_B						-113.5	
		NR_TDD_FR1_C						-113	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-112.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-112	
		NR_FDD_FR1_F						-111.5	
		NR_FDD_FR1_G						-111	
		NR_FDD_FR1_H						-110.5	
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-88		-		-111	
		NR_FDD_FR1_B						-110.5	
		NR_TDD_FR1_C						-110	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-109.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-109	

		NR_FDD_FR1_F						-108.5	
		NR_FDD_FR1_G						-108	
		NR_FDD_FR1_H						-107.5	
$\hat{E}_s/I_{ot}$			dB	-1.76		-4.7		-5..46	-5.46
$\hat{E}_s/N_{oc}$			dB	3	3	-2.9	-2.9	-4	-4
SS-RSRP/ CSI-RSRP Note3	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ SCS	-82	-82	-103.9	-103.9	-118	-118
		NR_FDD_FR1_B						-117.5	-117.5
		NR_TDD_FR1_C						-117	-117
		NR_FDD_FR1_D, NR_TDD_FR1_D						-116.5	-116.5
		NR_FDD_FR1_E, NR_TDD_FR1_E						-116	-116
		NR_FDD_FR1_F						-115.5	-115.5
		NR_FDD_FR1_G						-115	-115
		NR_FDD_FR1_H						-114.5	-114.5
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-85	-85	-	-	-115	-115
		NR_FDD_FR1_B						-114.5	-114.5
		NR_TDD_FR1_C						-114	-114
		NR_FDD_FR1_D, NR_TDD_FR1_D						-113.5	-113.5
		NR_FDD_FR1_E, NR_TDD_FR1_E						-113	-113
		NR_FDD_FR1_F						-112.5	-112.5
		NR_FDD_FR1_G						-112	-112
		NR_FDD_FR1_H						-111.5	-111.5
SS-RSRQ/CSI-RSRQ Note3		NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dB	-14.77	-14.77	-16.76	-16.76	-17.34	-17.34
		NR_FDD_FR1_B							
		NR_TDD_FR1_C							
		NR_FDD_FR1_D, NR_TDD_FR1_D							
		NR_FDD_FR1_E, NR_TDD_FR1_E							
		NR_FDD_FR1_F							
		NR_FDD_FR1_G							
		NR_FDD_FR1_H							
Io Note3	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 9.36MHz	-50		-70		-83.5	
		NR_FDD_FR1_B						-83	
		NR_TDD_FR1_C						-82.5	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-82	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-81.5	
		NR_FDD_FR1_F						-81	
		NR_FDD_FR1_G						-80.5	
		NR_FDD_FR1_H						-80	
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 38.16MHz	-50		-		-77.4	
		NR_FDD_FR1_B						-76.9	
		NR_TDD_FR1_C						-76.4	

		NR_FDD_FR1_D, NR_TDD_FR1_D						-75.9	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-75.4	
		NR_FDD_FR1_F						-74.9	
		NR_FDD_FR1_G						-74.4	
		NR_FDD_FR1_H						-73.9	
Propagation condition			-	AWGN	AWGN	AWGN	AWGN	AWGN	AWGN
Antenna configuration				1x2	1x2	1x2	1x2	1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRQ/CSI-RSRQ, SS-RSRP/CSI-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRQ/CSI-RSRQ, SS-RSRP/CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: NR operating band groups are as defined in clause 3.5.2.
Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

A.6.7.11.1.3 Test Requirements

The CSI-RSRQ measurement accuracy shall fulfil the requirements in clause 10.1.7.2.

A.6.7.11.2 SA Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.6.7.11.2.1 Test Purpose and Environment

The purpose of this test is to verify that the CSI-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.9.2.1 and 10.1.9.2.2.

A.6.7.11.2.2 Test Parameters

In this test case the two cells (i.e., Cell 1 and Cell 2) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.6.7.11.2.2-1. Both absolute accuracy and relative accuracy requirements of CSI-RSRQ inter-frequency measurement are tested by using test parameters in Table A.6.7.11.2.2-2. In all test cases, Cell 1 is the PCell and Cell 2 is target cell.

Table A.6.7.11.2.2-1: CSI-RSRQ Inter frequency CSI-RSRQ supported test configurations

Config	Description
1	NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.7.11.2.2-2: CSI-RSRQ Inter frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					

TDD configuration	Config 1		Not Applicable						
	Config 2		TDDConf.1.1						
	Config 3		TDDConf.2.1						
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52						
	Config 2		10: $N_{RB,c}$ = 52						
	Config 3		40: $N_{RB,c}$ = 106						
Gap pattern ID	Config 1,2,3		0						
BWP BW	Config 1		10: $N_{RB,c}$ = 52						
	Config 2		10: $N_{RB,c}$ = 52						
	Config 3		40: NRB,c = 106						
DRX Cycle		ms	Not Applicable						
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-	
	Config 2,5		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD		
	Config 3,6		SR.2.1 TDD		SR.2.1 TDD		SR.2.1 TDD		
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	-	R.1.1 FDD	-	CR.1.1 FDD		
	Config 2		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD		
	Config 3		CR2.1 TDD		CR2.1 TDD		CR2.1 TDD		
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-	
	Config 2		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD		
	Config 3		CCR2.1 TDD		CCR2.1 TDD		CCR2.1 TDD		
TRS Configuration	Config 1		TRS.1.1 FDD	-	TRS.1.1 FDD	-	TRS.1.1 FDD	-	
	Config 2		TRS.1.1 TDD		TRS.1.1 TDD		TRS.1.1 TDD		
	Config 3		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD		
OCNG Patterns			OCNG pattern 1						
Time offset with Cell 1	Config 1,2	µs	-	4.7	-	4.7	-	4.7	
	Config 3	µs	-	2.35	-	2.35	-	2.35	
CSI-RS configuration for RRM	Config 1		CSI-RS.RRM.FR1.1 FDD						
	Config 2		CSI-RS.RRM.FR1.1 TDD						
	Config 3		CSI-RS.RRM.FR1.2 TDD						
SSB configuration	Config 1,2		SSB.1 FR1						
	Config 3		SSB.2 FR1						
SMTC configuration	Config 1,2		SMTC.2						
	Config 3		SMTC.1						
	Config 1,2	kHz	15 kHz						

PDSCH/PDCCH subcarrier spacing		Config 3		30 kHz							
EPRE ratio of PSS to SSS EPRE ratio of PBCH DMRS to SSS EPRE ratio of PBCH to PBCH DMRS EPRE ratio of PDCCH DMRS to SSS EPRE ratio of PDCCH to PDCCH DMRS EPRE ratio of PDSCH DMRS to SSS EPRE ratio of PDSCH to PDSCH EPRE ratio of OCNG DMRS to SSS(Note 1) EPRE ratio of OCNG to OCNG DMRS (Note 1)			dB	0	0	0	0	0	0		
N_{oc} Note2	Config 1,2	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/15kHz	-80.18		-106		-116			
		NR_FDD_FR1_B						-115.5			
		NR_TDD_FR1_C						-115			
		NR_FDD_FR1_D NR_TDD_FR1_D						-114.5			
		NR_FDD_FR1_E NR_TDD_FR1_E						-114			
		NR_FDD_FR1_F						-113.5			
		NR_FDD_FR1_G						-113			
		NR_FDD_FR1_H						-112.5			
N_{oc} Note2	Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/15kHz	-86.27		-113		-116			
		NR_FDD_FR1_B						-115.5			
		NR_TDD_FR1_C						-115			
		NR_FDD_FR1_D NR_TDD_FR1_D						-114.5			
		NR_FDD_FR1_E NR_TDD_FR1_E						-114			
		NR_FDD_FR1_F						-113.5			
		NR_FDD_FR1_G						-113			
		NR_FDD_FR1_H						-112.5			
N_{oc} Note2	Config 1,2	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/15kHz	-80.18		-106		-116			
		NR_FDD_FR1_B						-115.5			
		NR_TDD_FR1_C						-115			
		NR_FDD_FR1_D NR_TDD_FR1_D						-114.5			
		NR_FDD_FR1_E NR_TDD_FR1_E						-114			
		NR_FDD_FR1_F						-113.5			
		NR_FDD_FR1_G						-113			
		NR_FDD_FR1_H						-112.5			
	Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6		-83.27		-110		-113			
		NR_FDD_FR1_B						-112.5			
		NR_TDD_FR1_C						-112			
		NR_FDD_FR1_D NR_TDD_FR1_D						-111.5			
		NR_FDD_FR1_E NR_TDD_FR1_E						-111			
		NR_FDD_FR1_F						-110.5			
		NR_FDD_FR1_G						-110			
		NR_FDD_FR1_H						-109.5			

$\hat{E}_s/I_{ot}$			dB	-1.75		-1.75		3	-1.75
$\hat{E}_s/N_{oc}$			dB	-1.75		-1.75		3	-1.75
SS-RSRP/CSI-RSRP[Note3]	Config 1,2	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/SCS	-81.93	-81.93	-107.75	-107.75	-113	-117.75
		NR_FDD_FR1_B						-112.5	-117.25
		NR_TDD_FR1_C						-112	-116.75
		NR_FDD_FR1_D NR_TDD_FR1_D						-111.5	-116.25
		NR_FDD_FR1_E NR_TDD_FR1_E						-111	-115.75
		NR_FDD_FR1_F						-110.5	-115.2
		NR_FDD_FR1_G						-110	-114.75
		NR_FDD_FR1_H						-109.5	-114.25
	Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6		-85.02	-85.02	-111.75	-111.75	-110	-114.75
		NR_FDD_FR1_B						-109.5	-114.25
		NR_TDD_FR1_C						-109	-113.75
		NR_FDD_FR1_D NR_TDD_FR1_D						-108.5	-113.25
		NR_FDD_FR1_E NR_TDD_FR1_E						-108	-112.75
		NR_FDD_FR1_F						-107.5	-112.2
		NR_FDD_FR1_G						-107	-111.75
		NR_FDD_FR1_H						-106.5	-111.25
SS-RSRQ/CSI-RSRQ[Note3]		NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dB	-14.77	-14.77	-40.59	-40.59	12.56T	14.76T
		NR_FDD_FR1_B							
		NR_TDD_FR1_C							
		NR_FDD_FR1_D NR_TDD_FR1_D							
		NR_FDD_FR1_E NR_TDD_FR1_E							
		NR_FDD_FR1_F							
		NR_FDD_FR1_G							
		NR_FDD_FR1_H							

Io[Note3]	Config 1,2	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/SCS	-50		-75.83		-83.28	-85.83
		NR_FDD_FR1_B						-82.78	-85.33
		NR_TDD_FR1_C						-82.28	-84.83
		NR_FDD_FR1_D NR_TDD_FR1_D						-81.78	-84.33
		NR_FDD_FR1_E NR_TDD_FR1_E						-81.28	-83.83
		NR_FDD_FR1_F						-80.78	-83.33
		NR_FDD_FR1_G						-80.28	-82.83
		NR_FDD_FR1_H						-79.78	-82.33
	Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6		-50		-76.73		-77.19	-79.73
		NR_FDD_FR1_B						-76.69	-79.23
		NR_TDD_FR1_C						-76.19	-78.73
		NR_FDD_FR1_D NR_TDD_FR1_D						-75.69	-78.23
		NR_FDD_FR1_E NR_TDD_FR1_E						-75.19	-77.73
		NR_FDD_FR1_F						-74.69	-77.23
		NR_FDD_FR1_G						-74.19	-76.73
		NR_FDD_FR1_H						-73.69	-76.53
Propagation condition			-	AWGN	AWGN	AWGN	AWGN	AWGN	AWGN
Antenna configuration				1x2	1x2	1x2	1x2	1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRQ/CSI-RSRQ, SS-RSRP/CSI-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRQ/CSI-RSRQ, SS-RSRP/CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: NR operating band groups are as defined in clause 3.5.2.

Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

A.6.7.11.2.3 Test Requirements

The CSI-RSRQ measurement accuracy shall fulfil the requirements in clause 10.1.9.2.1 and 10.1.9.2.2.

A.6.7.12 CSI-SINR

A.6.7.12.1 SA intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.6.7.12.1.1 Test Purpose and Environment

The purpose of this test is to verify that the CSI-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.12.2.1.

A.6.7.12.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table A.6.7.11.1.2-1. The absolute accuracy of CSI-SINR intra-frequency measurement is tested by using the parameters in Table A.6.7.11.1.2-2. In all test cases, Cell 1 is the PCell and Cell 2 is the target cell.

Table A.6.7.12.1.2-1: CSI-SINR Intra frequency CSI-SINR supported test configurations

Config	Description
1	NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.7.12.1.2-2: CSI-SINR Intra frequency test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1		freq1	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
Downlink initial BWP configuration			DLBWP.0.1			
Downlink dedicated BWP configuration			DLBWP.1.1			
Uplink initial BWP configuration			ULBWP.0.1			
Uplink dedicated BWP configuration			ULBWP.1.1			
DRX Cycle configuration		ms	Not Applicable			
TRS configuration	Config 1		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2		SR.1.1 TDD		SR.1.1 TDD	
	Config 3		SR.2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	-	CR.1.1 FDD	
	Config 2		CR.1.1 TDD		CR.1.1 TDD	

	Config 3		CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns			OP.1			
CSI-RSSI-Measurement			Not Applicable			
Time offset with Cell 1	Config 1,2	µs	-	2.35	-	2.35
	Config 3	µs	-	1.17	-	1.17
SSB configuration	Config 1,2		SSB.1 FR1			
	Config 3		SSB.2 FR1			
SMTC configuration	Config 1		SMTC.2			
	Config 2,3		SMTC.1			
CSI-RS for mobility	Config 1		CSI-RS.RRM.FR1.1 FDD			
	Config 2		CSI-RS.RRM.FR1.1 TDD			
	Config 3		CSI-RS.RRM.FR1.2 TDD			
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15			
	Config 3		30			
EPRE ratio of PSS to SSS EPRE ratio of PBCH DMRS to SSS EPRE ratio of PBCH to PBCH DMRS EPRE ratio of PDCCH DMRS to SSS EPRE ratio of PDCCH to PDCCH DMRS EPRE ratio of PDSCH DMRS to SSS EPRE ratio of PDSCH to PDSCH EPRE ratio of OCNG DMRS to SSS(Note 1) EPRE ratio of OCNG to OCNG DMRS (Note 1)		dB	0	0	0	0
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/15kHz	-93		-116	
	NR_FDD_FR1_B				-115.5	
	NR_TDD_FR1_C				-115	
	NR_FDD_FR1_D, NR_TDD_FR1_D				-114.5	
	NR_FDD_FR1_E, NR_TDD_FR1_E				-114	
	NR_FDD_FR1_F				-113.5	
	NR_FDD_FR1_G				-113	
	NR_FDD_FR1_H				-112.5	
N_{oc} Note2	Config 1,2	dBm/SCS	-93		Same as Noc for 15 kHz	
	Config 3 NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-90		-113	
	Config 3 NR_FDD_FR1_B				-112.5	
	Config 3 NR_TDD_FR1_C				-112	
	Config 3 NR_FDD_FR1_D, NR_TDD_FR1_D				-111.5	
	Config 3 NR_FDD_FR1_E, NR_TDD_FR1_E				-111	
	Config 3 NR_FDD_FR1_F				-110.5	

		NR_FDD_FR1_G				-110	
		NR_FDD_FR1_H				-109.5	
$\hat{E}_s / I_{ot}$			dB	0	-3.19	-5.46	-5.46
$\hat{E}_s / N_{oc}$			dB	4.54	2.66	-4	-4
CSI-RSRP Note3	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/SCS	-88.46	-90.34	-120	-120
		NR_FDD_FR1_B				-119.5	-119.5
		NR_TDD_FR1_C				-119	-119
		NR_FDD_FR1_D, NR_TDD_FR1_D				-118.5	-118.5
		NR_FDD_FR1_E, NR_TDD_FR1_E				-118	-118
		NR_FDD_FR1_F				-117.5	-117.5
		NR_FDD_FR1_G				-117	-117
		NR_FDD_FR1_H				-116.5	-116.5
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-85.46	-87.34	-117	-117
		NR_FDD_FR1_B				-116.5	-116.5
		NR_TDD_FR1_C				-116	-116
		NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5	-115.5
		NR_FDD_FR1_E, NR_TDD_FR1_E				-115	-115
		NR_FDD_FR1_F				-114.5	-114.5
		NR_FDD_FR1_G				-114	-114
		NR_FDD_FR1_H				-113.5	-113.5
CSI-SINR Note3		NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dB	0	-3.19	-5.46	-5.46
		NR_FDD_FR1_B					
		NR_TDD_FR1_C					
		NR_FDD_FR1_D, NR_TDD_FR1_D					
		NR_FDD_FR1_E, NR_TDD_FR1_E					
		NR_FDD_FR1_F					
		NR_FDD_FR1_G					
		NR_FDD_FR1_H					
Io Note3	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 9.36MHz	-57.5		-85.51	
		NR_FDD_FR1_B				-85.01	
		NR_TDD_FR1_C				-84.51	
		NR_FDD_FR1_D, NR_TDD_FR1_D				-84.01	
		NR_FDD_FR1_E, NR_TDD_FR1_E				-83.51	
		NR_FDD_FR1_F				-83.01	
		NR_FDD_FR1_G				-82.51	
		NR_FDD_FR1_H				-82.01	
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 38.16MHz	-51.41		-79.41	
		NR_FDD_FR1_B				-78.91	
		NR_TDD_FR1_C				-78.41	

		NR_FDD_FR1_D, NR_TDD_FR1_D			-77.91
		NR_FDD_FR1_E, NR_TDD_FR1_E			-77.41
		NR_FDD_FR1_F			-76.91
		NR_FDD_FR1_G			-76.41
		NR_FDD_FR1_H			-75.91
Propagation condition			-	AWGN	
Antenna configuration			-	1x2	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: CSI-SINR, CSI-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: CSI-SINR, CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 5: NR operating band groups are as defined in clause 3.5.2. Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.					

A.6.7.12.1.3 Test Requirements

The CSI-SINR measurement accuracy shall fulfil the requirements in clause 10.1.12.2.1.

A.6.7.12.2 SA Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.6.7.12.2.1 Test Purpose and Environment

The purpose of this test is to verify that the CSI-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1.14.2.1 and 10.1.14.2.2.

A.6.7.12.2.2 Test Parameters

In this test case the two cells (i.e., Cell 1 and Cell 2) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.6.7.12.2.2-1. Both absolute accuracy and relative accuracy requirements of CSI-SINR inter-frequency measurement are tested by using test parameters in Table A.6.7.12.2.2-2. In all test cases, Cell 1 is the PCell and Cell 2 is target cell.

Table A.6.7.12.2.2-1: CSI-SINR Inter frequency CSI-SINR supported test configurations

Config	Description
1	NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.7.12.2.2-2: CSI-SINR Inter frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1	freq2	freq1	freq2	freq1	freq2
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					

TDD configuration	Config 1		Not Applicable						
	Config 2		TDDConf.1.1						
	Config 3		TDDConf.2.1						
Downlink initial BWP configuration			DLBWP.0.1						
Downlink dedicated BWP configuration			DLBWP.1.1						
Uplink initial BWP configuration			ULBWP.0.1						
Uplink dedicated BWP configuration			ULBWP.1.1						
DRX Cycle configuration		ms	Not Applicable						
TRS configuration	Config 1		TRS.1.1 FDD						
	Config 2		TRS.1.1 TDD						
	Config 3		TRS.1.2 TDD						
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-	
	Config 2		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD		
	Config 3		SR.2.1 TDD		SR.2.1 TDD		SR.2.1 TDD		
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	-	R.1.1 FDD	-	CR.1.1 FDD		
	Config 2		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD		
	Config 3		CR.2.1 TDD		CR.2.1 TDD		CR.2.1 TDD		
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-	
	Config 2		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD		
	Config 3		CCR.2.1 TDD		CCR.2.1 TDD		CCR.2.1 TDD		
OCNG Patterns			OP.1						
CSI-RSSI-Measurement			Not Applicable						
Time offset with Cell 1	Config 1,2	µs	-	2.35	-	2.35	-	2.35	
	Config 3	µs	-	1.17	-	1.17	-	1.17	
SMTC configuration	Config 1		SMTC.2						
	Config 2,3		SMTC.1						
SSB configuration	Config 1,2		SSB.1 FR1						
	Config 3		SSB.2 FR1						
CSI-RS for mobility	Config 1		CSI-RS.RRM.FR1.1 FDD						
	Config 2		CSI-RS.RRM.FR1.1 TDD						
	Config 3		CSI-RS.RRM.FR1.2 TDD						
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15						
	Config 3		30						
EPRE ratio of PSS to SSS		dB	0	0	0	0	0	0	
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									

EPRE ratio of PDCCH to PDCCH DMRS EPRE ratio of PDSCH DMRS to SSS EPRE ratio of PDSCH to PDSCH EPRE ratio of OCNG DMRS to SSS(Note 1) EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} Note2	Config 1,2	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/15kHz	-88		-108.5		-119.5
		NR_FDD_FR1_B						-119
		NR_TDD_FR1_C						-118.5
		NR_FDD_FR1_D NR_TDD_FR1_D						-118
		NR_FDD_FR1_E NR_TDD_FR1_E						-117.5
		NR_FDD_FR1_F						-117
		NR_FDD_FR1_G						-116.5
		NR_FDD_FR1_H						-116
N_{oc} Note2	Config 1,2 N		dBm/15kHz	-88		-108.5		Same as Noc for 15kHz T
	Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6		-85		-105.5		-116.5
		NR_FDD_FR1_B						-116
		NR_TDD_FR1_C						-115.5
		NR_FDD_FR1_D NR_TDD_FR1_D						-115
		NR_FDD_FR1_E NR_TDD_FR1_E						-114.5
		NR_FDD_FR1_F						-114
		NR_FDD_FR1_G						-114.5
		NR_FDD_FR1_H						-113

$\hat{E}_s/I_{ot}$			dB	-1.75	-1.75	15	15	-4.0	-4.0
$\hat{E}_s/N_{oc}$			dB	-1.75		15		-4.0	
CSI-RSRP[Note3]	Config 1,2	NR_FDD_FR1_A NR_TDD_FR1_A [NOTE 6]	dBm/SCS	-89.75		-93.5		-123.5	
		NR_FDD_FR1_B						-123	
		NR_TDD_FR1_C						-122.5	
		NR_FDD_FR1_D NR_TDD_FR1_D						-122	
		NR_FDD_FR1_E NR_TDD_FR1_E						-121.5	
		NR_FDD_FR1_F						-121	
		NR_FDD_FR1_G						-120.5	
		NR_FDD_FR1_H						-120	
	Config 3	NR_FDD_FR1_A NR_TDD_FR1_A [NOTE 6]		-86.75		-90.5		-120.5	
		NR_FDD_FR1_B						-120	
		NR_TDD_FR1_C						-119.5	
		NR_FDD_FR1_D NR_TDD_FR1_D						-119	
		NR_FDD_FR1_E NR_TDD_FR1_E						-118.5	
		NR_FDD_FR1_F						-118	
		NR_FDD_FR1_G						-117.5	
		NR_FDD_FR1_H						-117	
CSI-SINR[Note3]		NR_FDD_FR1_A NR_TDD_FR1_A [NOTE 6]	dB	-1.75		15		-4.0	
		NR_FDD_FR1_B							
		NR_TDD_FR1_C							
		NR_FDD_FR1_D NR_TDD_FR1_D							

		NR_FDD_FR1_E NR_TDD_FR1_E				
		NR_FDD_FR1_F				
		NR_FDD_FR1_G				
		NR_FDD_FR1_H				
Io[Note3]	Config 1,2	NR_FDD_FR1_A NR_TDD_FR1_A [NOTE 6]	dBm/ 9.36MHz	-57.83	-65.4	-90.09
		NR_FDD_FR1_B				-89.59
		NR_TDD_FR1_C				-89.09
		NR_FDD_FR1_D NR_TDD_FR1_D				-88.59
		NR_FDD_FR1_E NR_TDD_FR1_E				-88.09
		NR_FDD_FR1_F				-87.59
		NR_FDD_FR1_G				-87.09
		NR_FDD_FR1_H				-86.59
	Config 3	NR_FDD_FR1_A NR_TDD_FR1_A [NOTE 6]	dBm/ 38.16 MHz	-51.73	-59.3	-84
		NR_FDD_FR1_B				-83.5
		NR_TDD_FR1_C				-83
		NR_FDD_FR1_D NR_TDD_FR1_D				-82.5
		NR_FDD_FR1_E NR_TDD_FR1_E				-82
		NR_FDD_FR1_F				-81.5
		NR_FDD_FR1_G				-81
		NR_FDD_FR1_H				-80.5
Propagation condition			-	AWGN		
Antenna configuration			-	1x2		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: CSI-SINR, CSI-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: CSI-SINR, CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: NR operating band groups are as defined in clause 3.5.2.
Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

A.6.7.12.2.3 Test Requirements

The CSI-SINR measurement accuracy shall fulfil the requirements in clause 10.1.14.2.1 and 10.1.14.2.2.

A.6.7.13 RSTD measurements

A.6.7.13.1 RSTD measurement accuracy test case for single positioning frequency layer

A.6.7.13.1.1 Test purpose and Environment

The purpose of the test is to verify that the RSTD measurement meets the accuracy requirements specified in clause 10.1.23.2 in an environment with AWGN propagation conditions.

The supported test configurations are specified in Table A.6.7.13.1.1-1.

Table A.6.7.13.1.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

In the test there are two synchronous cells: Cell 1 and Cell 2. Cell 1 is the reference as well as the PCell. Cell 2 is a neighbour cells. Both cells are on the same NR RF channel in FR1. GP#24 is configured if UE supports MG#24, otherwise GP#0 is configured. The *NR-TDOA-ProvideAssistanceData* and *NR-TDOA-RequestLocationInformation* message as defined in TS 37.355 shall be provided to the UE before the start of the test. The test duration should be larger than the UE measurement period as defined in clause 9.9.2.

Table A.6.7.13.1.1-2: RSTD accuracy test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
PRS ARFCN	1~3		freq1	Freq1	freq1	Freq1
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
	2		10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
	3		40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
Duplex mode	1		FDD		FDD	
	2		TDD		TDD	
	3		TDD		TDD	
TDD configuration	1		N/A		N/A	
	2		TDDConf.1.1		TDDConf.1.1	
	3		TDDConf.2.1		TDDConf.2.1	
Measurement gap	1, 2, 3		GP#24 or GP#0		GP#24 or GP#0	
PDSCH Reference measurement channel	1		SR.1.1 FDD	-	SR.1.1 FDD	-
	2		SR.1.1 TDD		SR.1.1 TDD	

	3		SR.2.1 FDD		SR.2.1 FDD	
RMSI CORESET Reference Channel	1		CR.1.1 FDD	-	CR.1.1 FDD	-
	2		CR.1.1 TDD	-	CR.1.1 TDD	-
	3		CR.2.1 FDD	-	CR.2.1 FDD	-
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	2		CCR.1.1 TDD	-	CCR.1.1 TDD	-
	3		CCR.2.1 TDD	-	CCR.2.1 TDD	-
SSB configuration	1		SSB.1 FR1		SSB.1 FR1	
	2		SSB.1 FR1		SSB.1 FR1	
	3		SSB.2 FR1		SSB.2 FR1	
OCNG Patterns	1~3		OP.1		OP.1	
TRS configuration	1		TRS.1.1 FDD	-	TRS.1.1 FDD	
	2		TRS.1.1 TDD		TRS.1.1 TDD	
	3		TRS.1.2 TDD		TRS.1.2 TDD	
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1		DLBWP.1.1 ULBWP.1.1	
Time offset with Cell 1	1	µs	-	3	-	3
	2,3		-	3	-	3
SMTC configuration	1		SMTC.2		SMTC.2	
	2,3		SMTC.1		SMTC.1	
PRS configuration	1		PRS.1.1 FR1		PRS.1.2 FR1	
	2		PRS.1.1 FR1		PRS.1.2 FR1	
	3		PRS.2.1 FR1		PRS.2.2 FR1	
PRS Resource slot offset	1, 2, 3	slot	0	4	0	4
Expected RSTD	1, 2, 3	µs	N/A	3	N/A	3
Expected RSTD uncertainty	1, 2, 3	µs	N/A	5	N/A	5
EPRE ratio of PSS to SSS	1~3	dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS[Note 1]						
EPRE ratio of OCNG to OCNG DMRS [Note 1]						
EPRE ratio of PRS to SSS	1~3	dB	0	0	0	0
N_{oc} [Note2]	1,2	dBm/ SCS	-98		-98	
	3		-95		-95	
PRS $\hat{E}_s/I_{ot}$	1~3	dB	-6	-13	-6	-13
PRP[Note3]	1,2	dBm/SCS	-103.7	-109.9	-103.7	-109.9
	3		-100.7	-106.9	-100.7	-106.9
Io[Note3]	1,2	dBm/ 9.36MHz	-68.80	-68.80	-68.80	-68.80

	3	dBm/ 38.16MHz	-62.70	-62.70	-62.70	-62.70
PRS $\hat{E}_s / N_{oc}$	1~3	dB	-5.7	-11.9	-5.7	-11.9
SSB $\hat{E}_s / N_{oc}$	1~3	dB	-5.7		-11.9	
Propagation condition	1~3	-	AWGN		AWGN	
Antenna configuration	1~3		1x2		1x2	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols other than those in the slots with transmitted PRS.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: PRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. The Io is calculated based only on the symbols in which PRS is transmitted.

Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

A.6.7.13.1.2 Test Requirements

The RSTD measurement accuracy for Cell 2 shall fulfil the absolute requirement in clause 10.1.23.2.

A.6.7.13.2 RSTD measurement accuracy test case for dual positioning frequency layer

A.6.7.13.2.1 Test purpose and Environment

The purpose of the test is to verify that the RSTD measurement meets the accuracy requirements specified in clause 10.1.23.2 in an environment with AWGN propagation conditions.

The supported test configurations are specified in Table A.6.7.13.2.1-1.

Table A.6.7.13.2.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

In the test there are two synchronous cells: Cell 1 and Cell 2. Cell 1 is the reference as well as the PCell on NR RF channel #1 in FR1. Cell 2 is a neighbour cell on a different NR RF channel #2 in FR1. GP#24 is configured if UE supports MG#24, otherwise GP#0 is configured. The *NR-TDOA-ProvideAssistanceData* and *NR-TDOA-RequestLocationInformation* message as defined in TS 37.355 shall be provided to the UE before the start of the test. The test duration should be larger than the UE measurement period as defined in clause 9.9.2.

Table A.6.7.13.2.1-2: RSTD accuracy test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2

PRS ARFCN	1~3		freq1	freq2	freq1	freq2
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
	2		10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
	3		40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
Duplex mode	1		FDD		FDD	
	2		TDD		TDD	
	3		TDD		TDD	
TDD configuration	1		N/A		N/A	
	2		TDDConf.1.1		TDDConf.1.1	
	3		TDDConf.2.1		TDDConf.2.1	
Measurement gap	1, 2, 3		GP#24 or GP#0		GP#24 or GP#0	
PDSCH Reference measurement channel	1		SR.1.1 FDD	-	SR.1.1 FDD	-
	2		SR.1.1 TDD		SR.1.1 TDD	
	3		SR.2.1 FDD		SR.2.1 FDD	
RMSI CORESET Reference Channel	1		CR.1.1 FDD	-	CR.1.1 FDD	-
	2		CR.1.1 TDD	-	CR.1.1 TDD	-
	3		CR.2.1 FDD	-	CR.2.1 FDD	-
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	2		CCR.1.1 TDD	-	CCR.1.1 TDD	-
	3		CCR.2.1 TDD	-	CCR.2.1 TDD	-
SSB configuration	1		SSB.1 FR1		SSB.1 FR1	
	2		SSB.1 FR1		SSB.1 FR1	
	3		SSB.2 FR1		SSB.2 FR1	
OCNG Patterns	1~3		OP.1		OP.1	
TRS configuration	1		TRS.1.1 FDD	-	TRS.1.1 FDD	
	2		TRS.1.1 TDD		TRS.1.1 TDD	
	3		TRS.1.2 TDD		TRS.1.2 TDD	
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1		DLBWP.1.1 ULBWP.1.1	
Time offset with Cell 1	1	µs	-	3	-	3
	2,3		-	3	-	3
SMTC configuration	1		SMTC.2		SMTC.2	
	2,3		SMTC.1		SMTC.1	
PRS configuration	1		PRS.1.1 FR1		PRS.1.2 FR1	
	2		PRS.1.1 FR1		PRS.1.2 FR1	
	3		PRS.2.1 FR1		PRS.2.2 FR1	
PRS Resource slot offset	1, 2, 3	slot	0	4	0	4
Expected RSTD	1, 2, 3	µs	N/A	3	N/A	3
Expected RSTD uncertainty	1, 2, 3	µs	N/A	5	N/A	5
EPRE ratio of PSS to SSS	1~3	dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS Note 1						
EPRE ratio of OCNG to OCNG DMRS Note 1						
EPRE ratio of PRS to SSS	1~3	dB	0	0	0	0
N_{oc} Note2	1,2	dBm/ SCS	-98		-98	
	3		-95		-95	

PRS $\hat{E}_s/I_{ot}$	1~3	dB	-6	-13	-6	-13
PRP[Note3]	1,2	dBm/SCS	-104	-111	-104	-111
	3		-101	-108	-101	-108
Io[Note3]	1,2	dBm/9.36MHz	-69.07	-69.83	-69.07	-69.83
	3	dBm/38.16MHz	-62.98	-63.74	-62.98	-63.74
PRS $\hat{E}_s/N_{oc}$	1~3	dB	-6	-13	-6	-13
Propagation condition	1~3	-	AWGN		AWGN	
Antenna configuration	1~3		1x2		1x2	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols other than those in the slots with transmitted PRS.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: PRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. The Io is calculated based only on the symbols in which PRS is transmitted.

Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

A.6.7.13.2.2 Test Requirements

The RSTD measurement accuracy for Cell 2 shall fulfil the absolute requirement in clause 10.1.23.2.

A.6.7.13.3 RSTD measurement accuracy test case with reduced number of samples for single positioning frequency layer in FR1 in RRC_CONNECTED state

A.6.7.13.3.1 Test purpose and Environment

The purpose of the test is to verify that the RSTD measurement meets the accuracy requirements for reduced number of samples specified in clause 10.1.23.2 in an environment with AWGN propagation conditions. In this test UE that supports *supportedDL-PRS-ProcessingSamples* is configured by LMF to perform PRS measurement with reduced number of samples.

The supported test configurations are specified in Table A.6.7.13.3.1-1.

Table A.6.7.13.3.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

In the test there are two synchronous cells: Cell 1 and Cell 2. Cell 1 is the reference as well as the PCell. Cell 2 is a neighbour cells. Both cells are on the same NR RF channel in FR1. GP#24 is configured if UE supports MG#24, otherwise GP#0 is configured. The *NR-TDOA-ProvideAssistanceData* and *NR-TDOA-RequestLocationInformation*

message as defined in TS 37.355 shall be provided to the UE before the start of the test. The test duration should be longer than the UE measurement period as defined in clause 9.9.2.7.

Table A.6.7.13.3.1-2: RSTD accuracy test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
PRS ARFCN	1~3		freq1	Freq1	freq1	Freq1
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
	2		10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
	3		40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
Duplex mode	1		FDD		FDD	
	2		TDD		TDD	
	3		TDD		TDD	
TDD configuration	1		N/A		N/A	
	2		TDDConf.1.1		TDDConf.1.1	
	3		TDDConf.2.1		TDDConf.2.1	
PDSCH Reference measurement channel	1		SR.1.1 FDD	-	SR.1.1 FDD	-
	2		SR.1.1 TDD		SR.1.1 TDD	
	3		SR.2.1 FDD		SR.2.1 FDD	
RMSI CORESET Reference Channel	1		CR.1.1 FDD	-	CR.1.1 FDD	-
	2		CR.1.1 TDD	-	CR.1.1 TDD	-
	3		CR.2.1 FDD	-	CR.2.1 FDD	-
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	2		CCR.1.1 TDD	-	CCR.1.1 TDD	-
	3		CCR.2.1 TDD	-	CCR.2.1 TDD	-
SSB configuration	1		SSB.1 FR1		SSB.1 FR1	
	2		SSB.1 FR1		SSB.1 FR1	
	3		SSB.2 FR1		SSB.2 FR1	
OCNG Patterns	1~3		OP.1		OP.1	
TRS configuration	1		TRS.1.1 FDD	-	TRS.1.1 FDD	
	2		TRS.1.1 TDD		TRS.1.1 TDD	
	3		TRS.1.2 TDD		TRS.1.2 TDD	
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1		DLBWP.1.1 ULBWP.1.1	
Time offset with Cell 1	1	µs	-	3	-	3
	2,3		-	3	-	3
SMTC configuration	1		SMTC.2		SMTC.2	
	2,3		SMTC.1		SMTC.1	
PRS configuration	1		PRS.1.4 FR1		PRS.1.4 FR1	
	2		PRS.1.4 FR1		PRS.1.4 FR1	
	3		PRS.2.4 FR1		PRS.2.4 FR1	
PRS BW	1,2,3		48 PRBs			
PRS muting info	1~3		‘10’	‘01’	‘10’	‘01’
Expected RSTD	1, 2, 3	µs	N/A	3	N/A	3
Expected RSTD uncertainty	1, 2, 3	µs	N/A	5	N/A	5
EPRE ratio of PSS to SSS	1~3	dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						

EPRE ratio of PDCCH to PDCCH DMRS EPRE ratio of PDSCH DMRS to SSS EPRE ratio of PDSCH to PDSCH DMRS EPRE ratio of OCNG DMRS to SSS Note 1 EPRE ratio of OCNG to OCNG DMRS Note 1						
N_{oc} Note2	1,2	dBm/ SCS	-98		-98	
	3		-95		-95	
$\hat{E}_s / I_{ot}$	1~3	dB	-3	5	-3	5
PRS-RSRP Note3	1,2	dBm/SCS	-101	-93	-101	-93
	3		-98	-90	-98	-90
SS-RSRP Note3	1,2	dBm/SCS	-88	-88	-88	-88
	3		-85	-85	-85	-85
Io Note3	1,2	dBm/ 9.36MHz	-69.5	-67.9	-69.5	-67.9
	3	dBm/ 38.16MHz	-63.4	-61.8	-63.4	-61.8
$\hat{E}_s / N_{oc}$	1~3	dB	-3	5	-3	5
Propagation condition	1~3	-	AWGN		AWGN	
Antenna configuration	1~3		1x2		1x2	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

A.6.7.13.3.2 Test Requirements

The RSTD measurement accuracy for Cell 2 shall fulfil the absolute requirement in clause 10.1.23.2.

A.6.7.13.4 RSTD measurement accuracy test case with Rx TEG

A.6.7.13.4.1 Test purpose and Environment

The purpose of the test is to verify that the RSTD measurement when the measurements of reference cell and neighbor cell are within the same Rx TEG meets the accuracy requirements specified in clause 10.1.23.2 in an environment with AWGN propagation conditions.

The supported test configurations are specified in Table A.6.7.13.4.1-1.

Table A.6.7.13.4.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode

3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

In the test there are two synchronous cells: Cell 1 and Cell 2. Cell 1 is the reference as well as the PCell. Cell 2 is a neighbour cell. Both cells are on the same NR RF channel in FR1. GP#24 is configured if UE supports GP#24, otherwise GP#0 is configured. The *NR-TDOA-ProvideAssistanceData* and *NR-TDOA-RequestLocationInformation* message as defined in TS 37.355 shall be provided to the UE before the start of the test. The test duration should be larger than the UE measurement period as defined in clause 9.9.2.

The UE is requested to provide the Rx TEG in the test via *nr-UE-RxTEG-Request-r17* in *NR-TDOA-RequestLocationInformation*.

The test applies to the UE supporting *Rx TEG* defiend in *NR-UE-TEG-Capability* and reporting the same Rx TEG for the measurements of reference cell and neighbour cell.

Table A.6.7.13.4.1-2: RSTD accuracy test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
PRS ARFCN	1~3		freq1	Freq1	freq1	Freq1
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
	2		10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
	3		40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
Duplex mode	1		FDD		FDD	
	2		TDD		TDD	
	3		TDD		TDD	
TDD configuration	1		N/A		N/A	
	2		TDDConf.1.1		TDDConf.1.1	
	3		TDDConf.2.1		TDDConf.2.1	
PDSCH Reference measurement channel	1		SR.1.1 FDD	-	SR.1.1 FDD	-
	2		SR.1.1 TDD		SR.1.1 TDD	
	3		SR.2.1 FDD		SR.2.1 FDD	
RMSI CORESET Reference Channel	1		CR.1.1 FDD	-	CR.1.1 FDD	-
	2		CR.1.1 TDD	-	CR.1.1 TDD	-
	3		CR.2.1 FDD	-	CR.2.1 FDD	-
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	2		CCR.1.1 TDD	-	CCR.1.1 TDD	-
	3		CCR.2.1 TDD	-	CCR.2.1 TDD	-
SSB configuration	1		SSB.1 FR1		SSB.1 FR1	
	2		SSB.1 FR1		SSB.1 FR1	
	3		SSB.2 FR1		SSB.2 FR1	
OCNG Patterns	1~3		OP.1		OP.1	
EPRE ratio of PSS to SSS	1~3	dB	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						

EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS Note 1						
EPRE ratio of OCNG to OCNG DMRS Note 1						
EPRE ratio of PRS to SSS						
TRS configuration	1		TRS.1.1 FDD	-	TRS.1.1 FDD	
	2		TRS.1.1 TDD		TRS.1.1 TDD	
	3		TRS.1.2 TDD		TRS.1.2 TDD	
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1		DLBWP.1.1 ULBWP.1.1	
Time offset with Cell 1	1	µs	-	3	-	3
	2,3		-	3	-	3
SMTC configuration	1		SMTC.2		SMTC.2	
	2,3		SMTC.1		SMTC.1	
PRS configuration	1		PRS.1.1 FR1		PRS.1.2 FR1	
	2		PRS.1.1 FR1		PRS.1.2 FR1	
	3		PRS.2.1 FR1		PRS.2.2 FR1	
PRS Resource slot offset	1~3	slot	0	4	0	4
Expected RSTD	1, 2, 3	µs	N/A	3	N/A	3
Expected RSTD uncertainty	1, 2, 3	µs	N/A	5	N/A	5
N_{oc} Note2	1,2	dBm/ SCS	-98		-98	
	3		-95		-95	
PRS $\hat{E}_s / I_{ot}$	1~3	dB	-5.33	-12.19	-5.33	-12.19
PRP Note3	1,2	dBm/SCS	-103	-109	-103	-109
	3		-100	-106	-100	-106
Io Note3	1,2	dBm/ 9.36MHz	-68.60	-68.60	-68.60	-68.60
	3	dBm/ 38.16MHz	-62.51	-62.51	-62.51	-62.51
PRS $\hat{E}_s / N_{oc}$	1~3	dB	-5	-11	-5	-11
Propagation condition	1~3	-	AWGN		AWGN	
Antenna configuration	1~3		1x2		1x2	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: RRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

A.6.7.13.4.2 Test Requirements

The RSTD measurement for Cell 1 and Cell 2 should fulfil the absolute accuracy requirements with same Rx TEG in clause 10.1.23.2.

A.6.7.14 PRS-RSRP measurements

A.6.7.14.1 SA: measurement accuracy with PRS in FR1

A.6.7.14.1.1 Test Purpose and Environment

The purpose of this test is to verify that the PRS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1.24.2.1 and 10.1.24.2.2.

A.6.7.14.1.2 Test parameters

In this set of test cases all cells are on the same carrier frequency. Supported test configurations are shown in table A.6.7.14.1.2-1. Both absolute and relative accuracy of PRS-RSRP measurements are tested by using the parameters in A.6.7.14.1.2-2. In all test cases, Cell 1 is the PCell.

Table A.6.7.14.1.2-1: PRS-RSRP supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table A.6.7.14.1.2-2: PRS-RSRP test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
Cell ID			489	0	489	0
SSB ARFCN			freq1		freq1	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
BWP BW	Config 1		10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
Downlink initial BWP configuration			DLBWP.0.1			
Downlink dedicated BWP configuration			DLBWP.1.1			
Uplink initial BWP configuration			ULBWP.0.1			
Uplink dedicated BWP configuration			ULBWP.1.1			
TRS configuration	Config 1		TRS.1.1 FDD	NA	TRS.1.1 FDD	NA
	Config 2		TRS.1.1 TDD	NA	TRS.1.1 TDD	NA

	Config 3		TRS.1.2 TDD	NA	TRS.1.2 TDD	NA
DRX Cycle		ms	Not Applicable			
Measurement gap			GP#24 or GP#0 Note 7			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2		SR.1.1 TDD		SR.1.1 TDD	
	Config 3		SR2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	-	CR.1.1 FDD	-
	Config 2		CR.1.1 TDD		CR.1.1 TDD	
	Config 3		CR2.1 TDD		CR2.1 TDD	
Control channel RMC	Config 1		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3		CCR2.1 TDD		CCR2.1 TDD	
PRS configuration	Config 1		PRS.1.3 FR1	PRS.1.3 FR1	PRS.1.4 FR1	PRS.1.4 FR1
	Config 2		PRS.1.3 FR1	PRS.1.3 FR1	PRS.1.4 FR1	PRS.1.4 FR1
	Config 3		PRS.2.3 FR1	PRS.2.3 FR1	PRS.2.4 FR1	PRS.2.4 FR1
PRS Resource slot offset (slot)	Config 1,2,3	slot	0	4	0	4
SSB configuration	Config 1		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
	Config 2		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
	Config 3		SSB.2 FR1	SSB.2 FR1	SSB.2 FR1	SSB.2 FR1
Time offset with Cell 1	Config 1	µs	-	3	-	3
	Config 2,3		-	3	-	3
Expected RSTD	Config 1,2,3	µs	3			
Expected RSTD uncertainty	Config 1,2,3	µs	5			
SMTC configuration	Config 1		SMTC.2			
	Config 2,3		SMTC.1			
OCNG Patterns			OCNG pattern 1			
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
EPRE ratio of PSS to SSS		dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						

EPRE ratio of PRS to SSS			dB	0	0	0	0	
N_{oc} Note2	Config 1,2		dBm/15KhZ	-98		-98		
	Config 3			-98		-98		
N_{oc} Note2	Config 1,2		dBm/SCS	-98		-98		
	Config 3			-95		-95		
PRS $\hat{E}_s/I_{ot}$			dB	-2.41	-12.12	-2.41	-12.12	
PRS $\hat{E}_s/N_{oc}$			dB	-2	-10	-2	-10	
PRP Note3	Config 1, 2		dBm/SCS	-100	-108	-100	-108	
	Config 3			-97	-105	-97	-105	
Io Note3	Config 1,2		dBm/9.36MHz	-67.67		-67.67		
	Config 3		dBm/38.16MHz	-61.57		-61.57		
Propagation condition				AWGN				
Antenna configuration				1x2				

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: PRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: PRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: Void.
Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification
Note 7: GP#24 is configured if UE supports MG#24, otherwise GP#0 is configured.

A.6.7.14.1.3 Test Requirements

In each test, the absolute PRS-RSRP measurement for each cell shall fulfil the absolute accuracy requirement in clause 10.1.24.2.1. The relative PRS-RSRP measurement between the two PRS resources within the same cell shall fulfil the relative accuracy requirement in clause 10.1.24.2.2.

A.6.7.14.2 SA: measurement accuracy with PRS in FR1 with reduced sample number

A.6.7.14.2.1 Test Purpose and Environment

The purpose of this test is to verify that the accuracy of PRS-RSRP measurement with reduced sample number is within the specified limits provided that PRS is transmitted within the active BWP of the UE. UE can support *supportedDL-PRS-ProcessingSamples-RRC-CONNECTED*, and the LMF indicates the UE to perform positioning

measurements with reduced number of samples N_{sample} via *reducedDL-PRS-ProcessingSamples*. This test will verify the requirements in clauses 10.1.24.2.1 and 10.1.24.2.2.

A.6.7.14.2.2 Test parameters

In this set of test cases all cells are on the same carrier frequency. Supported test configurations are shown in table A.6.7.14.2.2-1. Both absolute and relative accuracy of PRS-RSRP measurements are tested by using the parameters in A.6.7.14.2.2-2. In all test cases, Cell 1 is the PCell.

Table A.6.7.14.2.2-1: PRS-RSRP supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table A.6.7.14.2.2-2: PRS-RSRP test parameters

Parameter		Unit	Test 1	
			Cell 1	Cell 2
Cell ID			489	0
SSB ARFCN			freq1	
Duplex mode	Config 1		FDD	
	Config 2,3		TDD	
TDD configuration	Config 1		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52	
	Config 2		10: $N_{RB,c}$ = 52	
	Config 3		40: $N_{RB,c}$ = 106	
BWP BW	Config 1		10: $N_{RB,c}$ = 52	
	Config 2		10: $N_{RB,c}$ = 52	
	Config 3		40: $N_{RB,c}$ = 106	
Downlink initial BWP configuration			DLBWP.0.1	
Downlink dedicated BWP configuration			DLBWP.1.1	
Uplink initial BWP configuration			ULBWP.0.1	
Uplink dedicated BWP configuration			ULBWP.1.1	
TRS configuration	Config 1		TRS.1.1 FDD	NA
	Config 2		TRS.1.1 TDD	NA
	Config 3		TRS.1.2 TDD	NA
DRX Cycle		ms	Not Applicable	
Measurement gap			GP#24 or GP#0 Note 7	
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	-
	Config 2		SR.1.1 TDD	
	Config 3		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	-
	Config 2		CR.1.1 TDD	
	Config 3		CR2.1 TDD	
Control channel RMC	Config 1		CCR.1.1 FDD	-
	Config 2		CCR.1.1 TDD	
	Config 3		CCR2.1 TDD	
PRS configuration	Config 1		PRS.1.4 FR1	PRS.1.4 FR1
	Config 2		PRS.1.4 FR1	PRS.1.4 FR1
	Config 3		PRS.2.4 FR1	PRS.2.4 FR1

PRS BW		Config 1	RB	52	52
		Config 2		52	52
		Config 3		106	106
PRS Resource slot offset (slot)		Config 1,2,3	slot	0	4
SSB configuration		Config 1		SSB.1 FR1	SSB.1 FR1
		Config 2		SSB.1 FR1	SSB.1 FR1
		Config 3		SSB.2 FR1	SSB.2 FR1
Time offset with Cell 1		Config 1	ms	-	3
		Config 2,3	µs	-	3
SMTC configuration		Config 1		SMTC.2	
		Config 2,3		SMTC.1	
OCNG Patterns				OCNG pattern 1	
PDSCH/PDCCH subcarrier spacing		Config 1,2	kHz	15 kHz	
		Config 3			
EPRE ratio of PSS to SSS			dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} Note2	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H	dBm/15KhZ	-106	
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H		Not applicable Note 5	
N_{oc} Note2	Config 1,2		dBm/SCS	-106	

	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H		Not applicable Note 5	
$\hat{E}_s/I_{ot}$			dB	-6	-6
$\hat{E}_s/N_{oc}$			dB	-6	-6
SS-RSRP			dB	Same as PRS-RSRP	
PRS-RSRP Note3	Config 1, 2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H	dBm/SCS	-112	-112
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H		Not applicable Note 5	Not applicable Note 5
Io Note3	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H	dBm/9.36MHz	-77.07	
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D,	dBm/38.16MHz	Not applicable Note 5	

		NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H		
Propagation condition				AWGN
Antenna configuration				1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and PRS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: Subtest 1 is not used when testing with 30kHz SSB SCS.
Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification
Note 7: GP#24 is configured if UE supports MG#24, otherwise GP#0 is configured.

A.6.7.14.2.3 Test Requirements

In the test, the absolute PRS-RSRP measurement for each cell shall fulfil the absolute accuracy requirement in clause 10.1.24.2.1. The relative PRS-RSRP measurement between the two PRS resources within the same cell shall fulfil the relative accuracy requirement in clause 10.1.24.2.2.

A.6.7.14.3 Void

A.6.7.14.3.1 Void

A.6.7.14.3.2 Void

A.6.7.14.3.3 Void

A.6.7.15 UE Rx-Tx time difference measurements

A.6.7.15.1 UE Rx-Tx time difference measurement accuracy for single positioning frequency layer in FR1 SA

A.6.7.15.1.1 Test purpose and environment

The purpose of the test is to verify that the UE Rx-Tx time difference measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.25.2. The test is conducted in AWGN propagation condition in FR1 in standalone scenario when single positioning frequency layer is configured.

The supported test configurations in listed in Table A.6.7.15.1.1-1.

Table A.6.7.15.1.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are two cells in the test: PCell (Cell 1) and a neighbour cell (Cell 2). Both cells are on the same RF channel in FR1.

The *NR-Multi-RTT-ProvideAssistanceData* and *nr-Multi-RTT-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE before the start of the test.

The UE is configured with measurement gap pattern ID #0 or ID #24 before the test.

The UE is configured to transmit positioning SRS on Cell 1 during the test.

The test equipment measures the transmit timing of the UE using the transmitted SRS and measures the receive timing using the PRS. The test equipment then compares the difference of these two timings to the UE Rx-Tx measurement reported by the UE for each cell.

A.6.7.15.1.2 Test parameters

The UE Rx-Tx time difference accuracy test parameters are given in Table A.6.7.15.1.2-1.

Table A.6.7.15.1.2-1: UE Rx-Tx time difference measurement accuracy test parameters

Parameter	Unit	Test configuration	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
RF Channel Number		1,2,3	1	1	1	1
Measurement gap		1,2,3	GP#24 or GP#0 Note 4		GP#24 or GP#0 Note 4	
DRX		1,2,3	OFF		OFF	
Time offset with Cell 1	µs	1, 2, 3	N/A	3	N/A	3
TDD configuration		1	N/A	N/A	N/A	N/A
		2	TDDConf.1.1	TDDConf.1.1	TDDConf.1.1	TDDConf.1.1
		3	TDDConf.2.1	TDDConf.2.1	TDDConf.2.1	TDDConf.2.1
PDSCH RMC configuration		1	SR.1.1 FDD	N/A	SR.1.1 FDD	N/A
		2	SR.1.1 TDD		SR.1.1 TDD	
		3	SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET RMC configuration		1	CR.1.1 FDD	N/A	CR.1.1 FDD	N/A
		2	CR.1.1 TDD		CR.1.1 TDD	
		3	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD	N/A	CCR.1.1 FDD	N/A
		2	CCR.1.1 TDD		CCR.1.1 TDD	
		3	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns		1, 2, 3	OP.1	OP.1	OP.1	OP.1
EPRE ratio of PSS to SSS	dB	1, 2, 3	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						

EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS Note 1						
EPRE ratio of OCNG to OCNG DMRS Note 1						
EPRE ratio of PRS to SSS						
TRS Configuration		1	TRS.1.1 FDD	N/A	TRS.1.1 FDD	N/A
		2	TRS.1.1 TDD		TRS.1.1 TDD	
		3	TRS.1.2 TDD		TRS.1.2 TDD	
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1	N/A	DLBWP.0.1 ULBWP.0.1	N/A
Active DL BWP configuration		1, 2, 3	DLBWP.1.1	N/A	DLBWP.1.1	N/A
Active UL BWP configuration		1, 2, 3	ULBWP.1.1	N/A	ULBWP.1.1	N/A
PRS configuration		1	PRS.1.1 FR1	PRS.1.1 FR1	PRS.1.2 FR1	PRS.1.2 FR1
		2	PRS.1.1 FR1	PRS.1.1 FR1	PRS.1.2 FR1	PRS.1.2 FR1
		3	PRS.2.1 FR1	PRS.2.1 FR1	PRS.2.2 FR1	PRS.2.2 FR1
PRS Resource slot offset	slot	1, 2, 3	0	4	0	4
SRS configuration		1	POS-SRS.1	N/A	POS-SRS.1	N/A
		2	POS-SRS.1	N/A	POS-SRS.1	N/A
		3	POS-SRS.2	N/A	POS-SRS.2	N/A
N_{oc} Note 2	dBm/SCS	1	-98		-98	
		2	-98		-98	
		3	-95		-95	
N_{oc} Note 2	dBm/15 kHz	1	-98		-98	
		2				
		3				
PRS $\hat{E}_s/I_{ot}$	dB	1	-2.41	-12.12	-2.41	-12.12
		2				
		3				
PRS $\hat{E}_s/N_{oc}$	dB	1	-2	-10	-2	-10
		2				
		3				
PRP Note 3	dBm/SCS kHz	1	-100	-108	-100	-108
		2	-100	-108	-100	-108
		3	-97	-105	-97	-105
Io	dBm/9.36 MHz	1	-67.67	-67.67	-67.67	-67.67
	dBm/9.36 MHz	2	-67.67	-67.67	-67.67	-67.67
	dBm/38.16 MHz	3	-61.57	-61.57	-61.57	-61.57
Propagation Condition		1, 2, 3	AWGN		AWGN	

Note 1:	Void.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	PRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	GP#24 is configured if UE supports MG#24, otherwise GP#0 is configured.

Table A.6.7.15.1.2-2: Void

A.6.7.15.1.3 Test requirements

The UE Rx-Tx time difference measurement fulfils the UE Rx-Tx measurement accuracy requirements specified in clause 10.1.25.2 for both Cell 1 and Cell 2.

A.6.7.15.2 UE Rx-Tx time difference measurement accuracy with reduced number of samples in FR1 SA

A.6.7.15.2.1 Test purpose and environment

The purpose of the test is to verify that the UE Rx-Tx time difference measurement accuracy with reduced number of samples is within the specified limits. This test will verify the requirements in clause 10.1.25.2. The test is conducted in AWGN propagation condition in FR1 in standalone scenario when single positioning frequency layer is configured.

The supported test configurations in listed in Table A.6.7.15.2.1-1.

Table A.6.7.15.2.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are two cells in the test: PCell (Cell 1) and a neighbour cell (Cell 2). All cells are on the same RF channel in FR1.

The *NR-Multi-RTT-ProvideAssistanceData* and *NR-Multi-RTT-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE before the start of the test.

The UE is configured to measure UE Rx-Tx time difference using reduced number of samples via *requestedDL-PRS-ProcessingSamples* in *NR-Multi-RTT-RequestLocationInformation* during the test.

The UE is configured with measurement gap pattern ID #0 or ID #24 before the test.

The UE is configured to transmit positioning SRS on Cell 1 during the test.

The test equipment measures the transmit timing of the UE using the transmitted SRS and measures the receive timing using the PRS. The test equipment then compares the difference of these two timings to the UE Rx-Tx measurement reported by the UE for each cell.

A.6.7.15.2.2 Test parameters

The UE Rx-Tx time difference accuracy test parameters are given in Table A.6.7.15.2.2-1.

Table A.6.7.15.2.2-1: UE Rx-Tx time difference measurement accuracy test parameters

Parameter	Unit	Test configuration	Test 1	
			Cell 1	Cell 2
RF Channel Number		1,2,3	1	1
Measurement gap		1,2,3	GP#24 or GP#0 Note 4	
DRX		1,2,3	OFF	
Time offset with Cell 1	µs	1, 2, 3	N/A	3
TDD configuration		1	N/A	N/A
		2	TDDConf.1.1	TDDConf.1.1
		3	TDDConf.2.1	TDDConf.2.1
PDSCH RMC configuration		1	SR.1.1 FDD	N/A
		2	SR.1.1 TDD	
		3	SR.2.1 TDD	
RMSI CORESET RMC configuration		1	CR.1.1 FDD	N/A
		2	CR.1.1 TDD	
		3	CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD	N/A
		2	CCR.1.1 TDD	
		3	CCR.2.1 TDD	
OCNG Patterns		1, 2, 3	OP.1	OP.1
EPRE ratio of PSS to SSS	dB	1, 2, 3	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
EPRE ratio of PRS to SSS				
TRS Configuration		1	TRS.1.1 FDD	N/A
		2	TRS.1.1 TDD	
		3	TRS.1.2 TDD	
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1	N/A
Active DL BWP configuration		1, 2, 3	DLBWP.1.1	N/A
Active UL BWP configuration		1, 2, 3	ULBWP.1.1	N/A
PRS configuration		1	PRS.1.1 FR1	PRS.1.1 FR1
		2	PRS.1.1 FR1	PRS.1.1 FR1
		3	PRS.2.1 FR1	PRS.2.1 FR1
PRS BW		1	48 PRBs	48 PRBs
		2	48 PRBs	48 PRBs
		3	48 PRBs	48 PRBs
PRS Resource slot offset	slot	1, 2, 3	0	4
SRS configuration		1	POS-SRS.1	N/A
		2	POS-SRS.1	N/A

		3	POS-SRS.2	N/A
N_{oc} Note 2	dBm/SCS	1	-98	
		2	-98	
		3	-95	
N_{oc} Note 2	dBm/15 kHz	1	-98	
		2		
		3		
PRS $\hat{E}_s/I_{ot}$	dB	1	-1.76	-6.01
		2		
		3		
PRS $\hat{E}_s/N_{oc}$	dB	1	0	-3
		2		
		3		
PRP Note 3	dBm/SCS kHz	1	-98	-101
		2	-98	-101
		3	-95	-98
Io	dBm/9.36 MHz	1	-66.07	-66.07
	dBm/9.36 MHz	2	-66.07	-66.07
	dBm/38.16 MHz	3	-59.97	-59.97
Propagation Condition		1, 2, 3	AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: PRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: GP#24 is configured if UE supports MG#24, otherwise GP#0 is configured.

A.6.7.15.2.3 Test requirements

The UE Rx-Tx time difference measurement with reduced number of samples fulfils the UE Rx-Tx measurement accuracy.

A.6.7.15.3 UE Rx-Tx time difference measurement accuracy with RxTx TEG

A.6.7.15.3.1 Test purpose and environment

The purpose of the test is to verify that the relative UE Rx-Tx time difference measurement accuracy when the two measurements are within the same RxTx TEG is within the specified limits. This test will verify the requirements in clause 10.1.25.x. The test is conducted in AWGN propagation condition in FR1 in standalone scenario when single positioning frequency layer is configured.

The supported test configurations is listed in Table A.6.7.15.3.1-1.

Table A.6.7.15.3.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are two cells in the test: PCell (Cell 1) and a neighbour cell (Cell 2). Both cells are on the same RF channel in FR1.

The *NR-Multi-RTT-ProvideAssistanceData* and *nr-Multi-RTT-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE before the start of the test.

The UE is requested to provide the RxTx TEG in the test via *nr-UE-RxTxTEG-Request-r17* in *NR-Multi-RTT-RequestLocationInformation*.

The test applies to the UE supporting *RxTx TEG* defiend in *NR-UE-TEG-Capability* and reporting the same RxTx TEG for the two UE Rx-Tx measurements.

The UE is configured with measurement gap pattern ID #0 or ID #24 before the test.

The UE is configured to transmit positioning SRS on Cell 1 during the test.

The test equipment measures the transmit timing of the UE using the transmitted SRS and measures the receive timing using the PRS. The UE Rx-Tx time difference is derived by the difference of the receiving timing and the transmit timing for each cell.

A.6.7.15.3.2 Test parameters

The UE Rx-Tx time difference accuracy test parameters are given in Table A.6.7.15.3.2-1. y requirements specified in clause 10.1.25.2 for both Cell 1 and Cell 2.

Table A.6.7.15.3.2-2: UE Rx-Tx time difference measurement accuracy test parameters

Parameter	Unit	Test configuration	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
RF Channel Number		1,2,3	1	1	1	1
Measurement gap		1,2,3	GP#24 or GP#0 Note 4		GP#24 or GP#0 Note 4	
DRX		1,2,3	OFF		OFF	
Time offset with Cell 1	μs	1, 2, 3	N/A	3	N/A	3
TDD configuration		1	N/A	N/A	N/A	N/A
		2	TDDConf.1.1	TDDConf.1.1	TDDConf.1.1	TDDConf.1.1
		3	TDDConf.2.1	TDDConf.2.1	TDDConf.2.1	TDDConf.2.1
PDSCH RMC configuration		1	SR.1.1 FDD	N/A	SR.1.1 FDD	N/A
		2	SR.1.1 TDD		SR.1.1 TDD	
		3	SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET RMC configuration		1	CR.1.1 FDD	N/A	CR.1.1 FDD	N/A
		2	CR.1.1 TDD		CR.1.1 TDD	
		3	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD	N/A	CCR.1.1 FDD	N/A
		2	CCR.1.1 TDD		CCR.1.1 TDD	
		3	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns		1, 2, 3	OP.1	OP.1	OP.1	OP.1
EPRE ratio of PSS to SSS	dB	1, 2, 3	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						

EPRE ratio of PDCCH to PDCCH_DMRS						
EPRE ratio of PDSCH_DMRS to SSS						
EPRE ratio of PDSCH to PDSCH_DMRS						
EPRE ratio of OCNG DMRS to SSS Note 1						
EPRE ratio of OCNG to OCNG DMRS Note 1						
EPRE ratio of PRS to SSS						
TRS Configuration		1	TRS.1.1 FDD	N/A	TRS.1.1 FDD	N/A
		2	TRS.1.1 TDD		TRS.1.1 TDD	
		3	TRS.1.2 TDD		TRS.1.2 TDD	
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1	N/A	DLBWP.0.1 ULBWP.0.1	N/A
Active DL BWP configuration		1, 2, 3	DLBWP.1.1	N/A	DLBWP.1.1	N/A
Active UL BWP configuration		1, 2, 3	ULBWP.1.1	N/A	ULBWP.1.1	N/A
PRS configuration		1	PRS.1.1 FR1	PRS.1.1 FR1	PRS.1.2 FR1	PRS.1.2 FR1
		2	PRS.1.1 FR1	PRS.1.1 FR1	PRS.1.2 FR1	PRS.1.2 FR1
		3	PRS.2.1 FR1	PRS.2.1 FR1	PRS.2.2 FR1	PRS.2.2 FR1
PRS Resource slot offset	slot	1, 2, 3	0	4	0	4
SRS configuration		1	POS-SRS.1	N/A	POS-SRS.1	N/A
		2	POS-SRS.1	N/A	POS-SRS.1	N/A
		3	POS-SRS.2	N/A	POS-SRS.2	N/A
N_{oc} Note 2	dBm/SCS	1	-98		-98	
		2	-98		-98	
		3	-95		-95	
N_{oc} Note 2	dBm/15 kHz	1	-98		-98	
		2				
		3				
PRS $\hat{E}_s/I_{ot}$	dB	1	-5.33	-12.19	-5.33	-12.19
		2				
		3				
PRS $\hat{E}_s/N_{oc}$	dB	1	-5	-11	-5	-11
		2				
		3				
PRP Note 3	dBm/SCS kHz	1	-103	-109	-103	-109
		2	-103	-109	-103	-109
		3	-100	-106	-100	-106
Io	dBm/9.36 MHz	1	-68.60	-68.60	-68.60	-68.60
	dBm/9.36 MHz	2	-68.60	-68.60	-68.60	-68.60
	dBm/38.16 MHz	3	-62.51	-62.51	-62.51	-62.51
Propagation Condition		1, 2, 3	AWGN		AWGN	

Note 1: Void.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: PRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: GP#24 is configured if UE supports MG#24, otherwise GP#0 is configured.

A.6.7.15.3.3 Test requirements

The relative accuracy is derived by the difference of the UE Rx-Tx measurements on the two cells.

The UE Rx-Tx time difference measurements for Cell 1 and Cell 2 fulfil the relative UE Rx-Tx measurement accuracy requirements specified in clause 10.1.25.x.

A.6.7.16 PRS-RSRPP measurements

A.6.7.16.1 SA: measurement accuracy with PRS in FR1

A.6.7.16.1.1 Test Purpose and Environment

The purpose of this test is to verify that the accuracy of PRS-RSRPP measurement in RRC_CONNECTED is within the specified limits. This test will verify the requirements in clauses 10.1.X.y and 10.1. X.z.

A.6.7.16.1.2 Test parameters

In this set of test cases all cells are on the same carrier frequency. Supported test configurations are shown in table A.6.7.16.1.2-1. Both absolute and relative accuracy of PRS-RSRPP measurements are tested by using the parameters in A.6.7.16.1.2-2. In all test cases, Cell 1 is the PCell.

Table A.6.7.16.1.2-1: PRS-RSRPP supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table A.6.7.16.1.2-2: PRS-RSRPP test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
Cell ID			489	0	489	0
SSB ARFCN			freq1		freq1	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
BWP BW	Config 1		10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
Downlink initial BWP configuration			DLBWP.0.1			

Downlink dedicated BWP configuration			DLBWP.1.1			
Uplink initial BWP configuration			ULBWP.0.1			
Uplink dedicated BWP configuration			ULBWP.1.1			
TRS configuration	Config 1		TRS.1.1 FDD	NA	TRS.1.1 FDD	NA
	Config 2		TRS.1.1 TDD	NA	TRS.1.1 TDD	NA
	Config 3		TRS.1.2 TDD	NA	TRS.1.2 TDD	NA
DRX Cycle		ms	Not Applicable			
Measurement gap			GP#24 or GP#0 Note 7			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2		SR.1.1 TDD		SR.1.1 TDD	
	Config 3		SR2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	-	CR.1.1 FDD	-
	Config 2		CR.1.1 TDD		CR.1.1 TDD	
	Config 3		CR2.1 TDD		CR2.1 TDD	
Control channel RMC	Config 1		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3		CCR2.1 TDD		CCR2.1 TDD	
PRS configuration	Config 1		PRS.1.3 FR1	PRS.1.3 FR1	PRS.1.4 FR1	PRS.1.4 FR1
	Config 2		PRS.1.3 FR1	PRS.1.3 FR1	PRS.1.4 FR1	PRS.1.4 FR1
	Config 3		PRS.2.3 FR1	PRS.2.3 FR1	PRS.2.4 FR1	PRS.2.4 FR1
PRS Resource slot offset (slot)	Config 1,2,3	slot	0	4	0	4
SSB configuration	Config 1		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
	Config 2		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
	Config 3		SSB.2 FR1	SSB.2 FR1	SSB.2 FR1	SSB.2 FR1
Time offset with Cell 1	Config 1	ms	-	3	-	3
	Config 2,3	µs	-	3	-	3
SMTC configuration	Config 1		SMTC.2			
	Config 2,3		SMTC.1			
OCNG Patterns			OCNG pattern 1			
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
EPRE ratio of PSS to SSS		dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						

N_{oc} Note2	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H	dBm/15KhZ	-106		-88	
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H		Not applicable Note 5		-94	
N_{oc} Note2	Config 1,2		dBm/SCS	-106		-88	
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H		Not applicable Note 5		-91	
$\hat{E}_s/I_{ot}$			dB	2.46	-5.97	2.46	-5.97
$\hat{E}_s/N_{oc}$			dB	6	1	6	1
PRS-RSRP Note3	Config 1, 2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H	dBm/SCS	-100	-105	-82	-87
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C,		Not applicable Note 5	Not applicable Note 5	-85	-90

		NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H			
Io[Note3]	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A [NOTE 6], NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H	dBm/9.36 MHz	-70.09	-52.09
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A [NOTE 6], NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H	dBm/38.16 MHz	Not applicable [Note 5]	-51.99
Propagation condition				Two-tap channel defined in 38.101-4 Annex B.2.4, a = 1, $\tau_d = 0.45$ µs and $f_D = 5$ Hz	
Antenna configuration				1x2	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: PRS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: PRS-RSRPP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: Subtest 1 is not used when testing with 30kHz SSB SCS.
Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification
Note 7: GP#24 is configured if UE supports MG#24, otherwise GP#0 is configured.

A.6.7.16.1.3 Test Requirements

In each test, the absolute PRS-RSRPP measurement for each cell shall fulfil the absolute accuracy requirement in clause 10.1.X.y. The relative PRS-RSRPP measurement between the two PRS resources within the same cell shall fulfil the relative accuracy requirement in clause 10.1.X.z.

A.6.7.16.2 SA: measurement accuracy with reduced PRS samples in FR1

A.6.7.16.2.1 Test Purpose and Environment

The purpose of this test is to verify that the PRS-RSRPP measurement accuracy with N_{sample} = 1 in FR1 is within the specified limits. This test will verify the requirements in clauses [10.1.24.Z.1] and [10.1.24.Z.2].

The UE under test should support [*supportedDL-PRS-ProcessingSamples*], and the TE indicates the UE to perform positioning measurements with reduced number of samples. The PRS bandwidth is contained within the active BWP and the power difference between the serving cell SS-RSRP and neighbour cell PRS-RSRP is within 6dB, so that N_{sample}= 1 is assumed.

A.6.7.16.2.2 Test parameters

In this set of test cases all cells are on the same carrier frequency. Supported test configurations are shown in table A.6.7.16.2.2-1. Both absolute and relative accuracy of PRS-RSRPP measurements are tested by using the parameters in A.6.7.16.2.2-2. In all test cases, Cell 1 is the PCell.

Table A.6.7.16.2.2-1: PRS-RSRPP supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table A.6.7.16.2.2-2: PRS-RSRPP test parameters

Parameter		Unit	Test 1	
			Cell 1	Cell 2
Cell ID			489	0
SSB ARFCN			freq1	
Duplex mode	Config 1		FDD	
	Config 2,3		TDD	
TDD configuration	Config 1		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52	
	Config 2		10: $N_{RB,c}$ = 52	
	Config 3		40: $N_{RB,c}$ = 106	
BWP BW	Config 1		10: $N_{RB,c}$ = 52	
	Config 2		10: $N_{RB,c}$ = 52	
	Config 3		40: $N_{RB,c}$ = 106	
Downlink initial BWP configuration			DLBWP.0.1	
Downlink dedicated BWP configuration			DLBWP.1.1	
Uplink initial BWP configuration			ULBWP.0.1	
Uplink dedicated BWP configuration			ULBWP.1.1	
TRS configuration	Config 1		TRS.1.1 FDD	NA
	Config 2		TRS.1.1 TDD	NA
	Config 3		TRS.1.2 TDD	NA
DRX Cycle		ms	Not Applicable	
Measurement gap			GP#24 or GP#0 Note 5	
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	-
	Config 2		SR.1.1 TDD	
	Config 3		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	-

	Config 2		CR.1.1 TDD	
	Config 3		CR2.1 TDD	
Control channel RMC	Config 1		CCR.1.1 FDD	-
	Config 2		CCR.1.1 TDD	
	Config 3		CCR2.1 TDD	
PRS configuration	Config 1		PRS.1.4 FR1	PRS.1.4 FR1
	Config 2		PRS.1.4 FR1	PRS.1.4 FR1
	Config 3		PRS.2.4 FR1	PRS.2.4 FR1
PRS bandwidth	Config 1,2,3		48 PRBs	48 PRBs
PRS Resource slot offset (slot)	Config 1,2,3	slot	0	4
SSB configuration	Config 1		SSB.1 FR1	SSB.1 FR1
	Config 2		SSB.1 FR1	SSB.1 FR1
	Config 3		SSB.2 FR1	SSB.2 FR1
Time offset with Cell 1	Config 1	ms	-	3
	Config 2,3	µs	-	3
SMTC configuration	Config 1		SMTC.2	
	Config 2,3		SMTC.1	
OCNG Patterns			OCNG pattern 1	
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz	
	Config 3		30 kHz	
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	Config 1,2	dBm/15KhZ	-98	
	Config 3			
N_{oc} Note2	Config 1,2	dBm/SCS	-98	
	Config 3		-95	
$\hat{E}_s/I_{ot}$		dB	2.46	-5.97
$\hat{E}_s/N_{oc}$		dB	6	1
PRS-RSRP Note3	Config 1, 2	dBm/SCS	-92	-97
	Config 3		-89	-94
SS-RSRP Note3	Config 1, 2	dBm/SCS	-92	-97
	Config 3		-89	-94
Io Note3	Config 1,2	dBm/9.36MHz	-70.09	
	Config 3	dBm/38.16MHz	-63.99	
Propagation condition			[Two-tap channel] Note6	
Antenna configuration			1x2	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	PRS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	GP#24 is configured if UE supports MG#24, otherwise GP#0 is configured.
Note 6:	The two-tap channel model is defined in 38.101-4 Annex B.2.4 (a = 1, τ_d=0.45 μs and f_D=5 Hz).

A.6.7.16.2.3 Test Requirements

In each test, the absolute PRS-RSRPP measurement for each cell shall fulfil the absolute accuracy requirement in clause [10.1.24.Z.1]. The relative PRS-RSRPP measurement between the two PRS resources within the same cell shall fulfil the relative accuracy requirement in clause [10.1.24.Z.2].

A.6.8 Measurement procedure in RRC_INACTIVE

A.6.8.1 RSTD measurements

A.6.8.1.1 NR RSTD measurement reporting delay test case for single positioning frequency layer in FR1 SA in RRC_INACTIVE state

A.6.8.1.1.1 Test Purpose and Environment

The purpose of the test is to verify that the RSTD measurement meets the requirements specified in Clause 5.6.2.5 in an environment with AWGN propagation conditions in FR1 in standalone scenario when single positioning frequency layer is configured.

The supported test configurations are specified in Table A.6.8.1.1.1-1.

Table A.6.8.1.1.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

In the test there are three synchronous cells: Cell 1, Cell 2 and Cell 3. Cell 1 is the reference as well as the PCell. Cell 2 and Cell 3 are the neighbour cells. All 3 cells are on the same RF channel in FR1.

The test consists of two consecutive time intervals, with duration of T1 and T2. During time duration T1, the UE shall be in RRC_CONNECTED state and shall not have any timing information of Cell 2 and Cell 3. During T2 UE shall be in RRC_INACTIVE state and all three cells transmit PRS resources within initial DL BWP of the UE and with the same numerology as the initial DL BWP.

Note: The information on when PRS is muted is conveyed to the UE using PRS muting information.

The *NR-DL-TDOA-ProvideAssistanceData* and *nr-DL-TDOA-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where ΔT = 50 ms is the maximum processing time of the *DL-TDOA assistance* data and location information request.

The beginning of the time interval T2 shall be aligned with the first DRX cycle containing a DL PRS resource(s).

The UE is configured with DRX cycle of 1.28s.

The general test parameters are listed in Table A.6.8.1.1.1-2, and cell specific test parameters are listed in Table A.6.8.1.1.1-3 and Table A.6.8.1.1.1-4.

Table A.6.8.1.1.1-2: General test parameters for RSTD measurement reporting delay

Parameter		Unit	Value	Comment
Reference cell			Cell 1	Reference cell is the cell in the DL-TDOA assistance data with respect to which the RSTD measurement is defined, as specified in TS 38.215 [4] and TS 37.355 [34]. The reference cell is the PCell in this test case.
Neighbor cells			Cell 2 and Cell 3	Cell 2 and Cell 3 appear at the first and second places in the neighbour cell list in the DL-TDOA assistance data.
SSB configuration	Config 1		SSB.1 FR1	
	Config 2		SSB.1 FR1	
	Config 3		SSB.2 FR1	
SMTC configuration	Config 1		SMTC.2	
	Config 2		SMTC.1	
	Config 3		SMTC.1	
PDSCH RMC configuration	Config 1		SR.1.1 FDD	
	Config 2		SR.1.1 TDD	
	Config 3		SR.2.1 TDD	
RMSI CORESET RMC configuration	Config 1		CR.1.1 FDD	As specified in clause A.3.1.2.1
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
Dedicated CORESET RMC configuration	Config 1		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
Initial BWP configuration	Config 1,2,3		DLBWP.0.1 ULBWP.0.1	
Active UL BWP configuration	Config 1,2,3		ULBWP.1.1	
PRS Configuration	Config 1		PRS.1.1 FR1	As specified in clause A.3.31
	Config 2		PRS.1.2 FR1	
	Config 3		PRS.2.1 FR1	
Physical cell ID PCI			(PCI of Cell 1 – PCI of Cell 2)mod6=0 and (PCI of Cell 1 – PCI of Cell 3)mod6=0	The cell PCIs are selected such that the relative shifts of PRS patterns among cells are as given by the test parameters
CP length			Normal	
DRX		s	1.28	
Radio frame receive time offset between the cells at the UE antenna connector		μs	Cell 2 to Cell 1: 0 Cell 3 to Cell 1: 3	PRS are transmitted from synchronous cells

Expected RSTD	µs	Cell 2: 3 Cell 3: 3 Other neighbour cells: randomly between -3 and 3	The expected RSTD is what is expected at the receiver. The corresponding parameter in the DL-TDOA assistance data specified in TS 37.355 [34] is the expectedRSTD indicator
Expected RSTD uncertainty for all neighbour cells	µs	5	The corresponding parameter in the DL-TDOA assistance ta specified in TS 37.355 [34] is the expectedRSTD-Uncertainty index
Number of cells provided in DL-TDOA assistance data		16	Including the reference cell
PRS muting info		Cell 1: '10' Cell 2: '01' Cell 3: '10'	Correponds to prs-MutingInfo defined in TS 37.355 [34]
PRS resource RE offset		Cell 1: 0 Cell 2: 0 Cell 3: 1	Cell 1 and Cell 3 are configured with different resource offsets
T1	s	3	The length of the time interval from the beginning of each test
T2	s	5	The length of the time interval that follows immediately after time interval T1.

Table A.6.8.1.1.1-3: Cell-specific test parameters for RSTD measurement reporting delay during T1

Parameter		Unit	Cell 1	Cell 2	Cell 3
NR RF Channel Number			1	1	1
Positiong frequency layer			1	1	1
Correlation Matrix and Antenna Configuration			1x2 Low	1x2 Low	1x2 Low
OCNG patterns defined in A.3.2.1			OP.1	N/A	N/A
N_{oc} Note 3	Config 1	dBm/SCS	-98		
	Config 2	dBm/SCS	-98		
	Config 3	dBm/SCS	-95		
PRS $\hat{E}_s/N_{oc}$		dB	-Infinity	-Infinity	-Infinity
SSB $\hat{E}_s/N_{oc}$		dB	10	-Infinity	-Infinity
Io Note 4	Config 1	dBm/ 9.36MHz	-68.63	-70.05	-70.05
	Config 2	dBm/ 9.36MHz	-68.63	-70.05	-70.05
	Config 3	dBm/ 38.16MHz	-63.20	-63.96	-63.96
SSB RP Note4	Config 1	dBm/SCS	-88	-Infinity	-Infinity
	Config 2	dBm/SCS	-88	-Infinity	-Infinity
	Config 3	dBm/SCS	-88	-Infinity	-Infinity
Propagation Condition			AWGN		

Note 1:	OCNG shall be used such that active cell (Cell 1) is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The resources for uplink transmission are assigned after the end of time period T2 to UEs that do not support SDT for measurement reporting.
Note 3:	Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 4:	SSB RP and Io levels have been derived from other parameters and are given for information purpose. These are not settable test parameters.

Table A.6.8.1.1.1-4: Cell-specific test parameters for RSTD measurement reporting delay during T2

Parameter		Unit	Cell 1	Cell 2	Cell 3
			T2	T2	T2
NR RF Channel Number			1	1	1
Correlation Matrix and Antenna Configuration			1x2 Low	1x2 Low	1x2 Low
OCNG patterns defined in A.3.2.1			OP.1	OP.1	OP.1
PRACH configuration			FR1 PRACH configuration 1	FR1 PRACH configuration 1	FR1 PRACH configuration 1
N_{oc} Note 3	Config 1	dBm/SCS	-98	-98	-98
	Config 2	dBm/SCS	-98	-98	-98
	Config 3	dBm/SCS	-95	-95	-95
PRS $\hat{E}_s/N_{oc}$	Config 1	dB	-5.45	-11.67	-11.67
	Config 2	dB	-5.45	-11.67	-11.67
	Config 3	dB	-5.45	-11.67	-11.67
Io Note 4	Config 1	dBm/ 9.36MHz	-69.59	-69.93	-69.93
	Config 2	dBm/ 96.48MHz	-69.59	-69.93	-69.93
	Config 3	dBm/ 38.16MHz	-63.72	-63.89	-63.89
PRS $\hat{E}_s/I_{ot}$		dB	-6	-13	-13
Propagation Condition			AWGN		

Note 1:	OCNG shall be used such that active cells (all, except Cell 3 in T2) are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols other than those in the subframes with transmitted PRS.
Note 2:	The resources for uplink transmission are assigned after the end of time period T2 to UEs that do not support SDT for measurement reporting.
Note 3:	Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

A.6.8.1.1.2 Test Requirements

The RSTD measurement time fulfils the requirements specified in Clause 5.6.2.5.

The UE shall perform and report the RSTD measurements for Cell 2 and Cell 3 with respect to the reference cell in the DL-TDOA assistance data, Cell 1, within the time duration specified in section 5.6.2.5 starting from the beginning of time interval T2.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported RSTD measurement for each correct event shall be within the RSTD reporting range specified in Clause 10.1.23.3, i.e., between RSTD_0000000 and RSTD1970049.

A.6.8.1.2 NR RSTD measurement reporting delay test case with reduced number of samples in RRC_INACTIVE, FR1 SA

A.6.8.1.2.1 Test Purpose and Environment

The purpose of the test is to verify that the RSTD measurement meets the requirements specified in Clause 5.6.2 in an environment with AWGN propagation conditions in FR1 in standalone scenario when single-sample measurements are requested by the LMF. This test is applicable to UEs that support [FG 14-2 PRS measurement for reduced sample in RRC_inactive state].

The supported test configurations are specified in Table A.6.8.1.2.1-1.

Table A.6.8.1.2.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

In the test there are three synchronous cells: Cell 1, Cell 2 and Cell 3. Cell 1 is the reference as well as the PCell. Cell 2 and Cell 3 are the neighbour cells. All 3 cells are on the same RF channel in FR1.

The test consists of two consecutive time intervals, with duration of T1 and T2. The UE shall be in RRC_CONNECTED state during T1 and in RRC_INACTIVE state during T2. During time duration T1, the UE shall not have any timing information of Cell 2 and Cell 3. All three cells transmit PRS during T2. PRS resources from all three cells are transmitted within the initial DL BWP of the UE and with the same numerology as the initial DL BWP.

Note: The information on when PRS is muted is conveyed to the UE using PRS muting information.

The beginning of the time interval T2 shall be aligned with the beginning of the first DRX cycle in RRC_INACTIVE.

The *NR-DL-TDOA-ProvideAssistanceData* and *nr-DL-TDOA-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where ΔT = 50 ms is the maximum processing time of the *DL-TDOA assistance* data and location information request.

The *nr-DL-TDOA-RequestLocationInformation* IE should indicate to the UE that single-sample measurements are requested, i.e. requestedDL-PRS-ProcessingSamples-r17 is set to m1.

The general test parameters are listed in Table A.6.8.1.2.1-2, and cell specific test parameters are listed in Table A.6.8.1.2.1-3 and Table A.6.8.1.2.1-4.

Table A.6.8.1.2.1-2: General test parameters for RSTD measurement reporting delay

Parameter		Unit	Value	Comment
Reference cell			Cell 1	Reference cell is the cell in the DL-TDOA assistance data with respect to which the RSTD measurement is defined, as specified in TS 38.215 [4] and TS 37.355 [34]. The reference cell is the PCell in this test case.
Neighbor cells			Cell 2 and Cell 3	Cell 2 and Cell 3 appear at the first and second places in the neighbour cell list in the DL-TDOA assistance data.
SSB configuration	Config 1		SSB.1 FR1	
	Config 2		SSB.1 FR1	
	Config 3		SSB.2 FR1	
SMTC configuration	Config 1		SMTC.2	
	Config 2		SMTC.1	
	Config 3		SMTC.1	
PDSCH RMC configuration	Config 1		SR.1.1 FDD	
	Config 2		SR.1.1 TDD	
	Config 3		SR.2.1 TDD	
RMSI CORESET RMC configuration	Config 1		CR.1.1 FDD	As specified in clause A.3.1.2.1
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
Dedicated CORESET RMC configuration	Config 1		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
Initial BWP configuration	Config 1,2,3		DLBWP.0.1 ULBWP.0.1	
PRS Configuration	Config 1		PRS.1.2 FR1	As specified in clause A.3.31. The number of PRS RBs is the same as for the channel BW.
	Config 2		PRS.1.2 FR1	
	Config 3		PRS.2.2 FR1	
PRS Resource slot offset	Config 1, 2, 3	slots	Cell 1, 2, 3: 0	
Physical cell ID PCI			(PCI of Cell 1 – PCI of Cell 2)mod6=0 and (PCI of Cell 1 – PCI of Cell 3)mod6=0	The cell PCIs are selected such that the relative shifts of PRS patterns among cells are as given by the test parameters
CP length			Normal	
DRX cycle length		s	1.28	
Radio frame receive time offset between the cells at the UE antenna connector		μs	Cell 2 to Cell 1: 0 Cell 3 to Cell 1: 3	PRS are transmitted from synchronous cells

Expected RSTD	µs	Cell 2: 3 Cell 3: 3 Other neighbour cells: randomly between -3 and 3	The expected RSTD is what is expected at the receiver. The corresponding parameter in the DL-TDOA assistance data specified in TS 37.355 [34] is the expectedRSTD indicator
Expected RSTD uncertainty for all neighbour cells	µs	5	The corresponding parameter in the DL-TDOA assistance ta specified in TS 37.355 [34] is the expectedRSTD-Uncertainty index
Number of cells provided in DL-TDOA assistance data		16	Including the reference cell
PRS muting info		Cell 1: '10' Cell 2: '01' Cell 3: '10'	Correponds to prs-MutingInfo defined in TS 37.355 [34]
PRS resource RE offset		Cell 1: 0 Cell 2: 0 Cell 3: 1	Cell 1 and Cell 3 are configured with different resource offsets
T1	s	3	The length of the time interval from the beginning of each test
T2	s	[5]	The length of the time interval that follows immediately after time interval T1

Table A.6.8.1.2.1-3: Cell-specific test parameters for RSTD measurement reporting delay during T1

Parameter		Unit	Cell 1	Cell 2	Cell 3
NR RF Channel Number			1	1	1
Positiong frequency layer			1	1	1
Correlation Matrix and Antenna Configuration			1x2 Low	1x2 Low	1x2 Low
OCNG patterns defined in A.3.2.1			OP.1	N/A	N/A
N_{oc} Note 3	Config 1	dBm/SCS	-98		
	Config 2	dBm/SCS	-98		
	Config 3	dBm/SCS	-95		
PRS $\hat{E}_s/N_{oc}$		dB	-Infinity	-Infinity	-Infinity
SSB $\hat{E}_s/N_{oc}$		dB	0	-Infinity	-Infinity
Io Note 4	Config 1	dBm/ 9.36MHz	-67.05	-67.05	-67.05
	Config 2	dBm/ 9.36MHz	-67.05	-67.05	-67.05
	Config 3	dBm/ 38.16MHz	-60.94	-60.94	-60.94
SSB RP Note4	Config 1	dBm/SCS	-98	-Infinity	-Infinity
	Config 2	dBm/SCS	-98	-Infinity	-Infinity
	Config 3	dBm/SCS	-95	-Infinity	-Infinity
Propagation Condition			AWGN		

Note 1:	OCNG shall be used such that active cell (Cell 1) is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 3:	Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 4:	SSB RP and Io levels have been derived from other parameters and are given for information purpose. These are not settable test parameters.

Table A.6.8.1.2.1-4: Cell-specific test parameters for RSTD measurement reporting delay during T2

Parameter		Unit	Cell 1	Cell 2	Cell 3
			T2	T2	T2
NR RF Channel Number			1	1	1
Correlation Matrix and Antenna Configuration			1x2 Low	1x2 Low	1x2 Low
OCNG patterns defined in A.3.2.1			OP.1	OP.1	OP.1
PRACH configuration			FR1 PRACH configuration 1	FR1 PRACH configuration 1	FR1 PRACH configuration 1
N_{oc} Note 3	Config 1	dBm/SCS	-98	-98	-98
	Config 2	dBm/SCS	-98	-98	-98
	Config 3	dBm/SCS	-95	-95	-95
PRS $\hat{E}_s/N_{oc}$	Config 1	dB	0	-3	-3
	Config 2	dB	0	-3	-3
	Config 3	dB	0	-3	-3
Io Note 4	Config 1	dBm/ 9.36MHz	-66.07	-68.29	-66.07
	Config 2	dBm/ 9.36MHz	-66.07	-68.29	-66.07
	Config 3	dBm/ 38.16MHz	-61.52	-62.99	-61.52
PRS $\hat{E}_s/I_{ot}$		dB	0	-3	-3
Propagation Condition			AWGN		

Note 1:	OCNG shall be used such that all active cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols, except for slots where PRS is transmitted by any of the cells.
Note 2:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 3:	Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 4:	Io levels apply only for symbols where PRS is transmitted.

A.6.8.1.2.2 Test Requirements

The RSTD measurement time fulfils the requirements specified in Clause 5.6.2.5.

The UE shall perform and report the RSTD measurements for Cell 2 and Cell 3 with respect to the reference cell in the DL-TDOA assistance data, Cell 1, within the time duration specified in section 5.6.2.5 starting from the beginning of time interval T2.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported RSTD measurement for each correct event shall be within the RSTD reporting range specified in Clause 10.1.23.3, i.e., between RSTD_0000000 and RSTD_1970049.

A.6.8.2 PRS-RSRP measurements

A.6.8.2.1 PRS-RSRP reporting delay test case for single positioning frequency layer in RRC_INACTIVE

A.6.8.2.1.1 Test purpose and Environment

The purpose of the test is to verify that the PRS-RSRP measurement in RRC_INACTIVE meets the delay requirements specified in clause 5.6.3.5 in an environment with AWGN propagation conditions.

The supported test configurations are specified in Table A.6.8.2.1.1-1.

Table A.6.8.2.1.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

In the test there are two synchronous cells: Cell 1 and Cell 2. Cell 1 is the reference as well as the PCell. Cell 2 is a neighbour cell. Both cells are on the same NR RF channel in FR1. The test consists of two consecutive time intervals, with duration of T1 and T2. Both cells transmit PRS during T2.

During T1 UE is in RRC_CONNECTED, the *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message as defined in TS 37.355 shall be provided to the UE during T1. The last slot containing the two messages for the assistance data and location information request is denoted as #n. In the next DL slot after slot #n, UE is released into RRC_INACTIVE.

The beginning of the time interval T2 is the first PRS resource occasion occurring ΔT after the slot #n, where ΔT = 50 ms is the maximum processing time of the assistance data and location information request.

The general test parameters are listed in Table A.6.8.2.1.1-2, and cell specific test parameters are listed in Table A.6.8.2.1.1-3.

Table A.6.8.2.1.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Reference cell		1, 2, 3	Cell 1	Cell 1 is the PCell and the DL-AoD reference cell in the positioning assistance data.

Neighbour cell		1, 2, 3	Cell 2	Cell 2 is a neighbour cell in the positioning assistance data.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2	
$BW_{channel}$	MHz	1	10: $N_{RB,c}$ = 52	
		2	10: $N_{RB,c}$ = 52	
		3	40: $N_{RB,c}$ = 106	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
CP length		1, 2, 3	Normal	
DRX		1, 2, 3	1.28s	
Time offset between serving and neighbour cells	µs	1, 2, 3	3	Synchronous cells
Expected RSTD	µs	1, 2, 3	3	
Expected RSTD uncertainty	µs	1, 2, 3	5	
T1	s	1, 2, 3	2	
T2	s	1, 2, 3	[6]	

Table A.6.8.2.1.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD			
		3	CR.2.1 TDD			
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD			
		3	CCR.2.1 TDD			
OCNG Patterns		1, 2, 3	OP.1		OP.1	
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		N/A	
PRS configuration		1	PRS.1.4 FR1		PRS.1.4 FR1	
		2	PRS.1.4 FR1		PRS.1.4 FR1	
		3	PRS.2.4 FR1		PRS.2.4 FR1	
PRS muting info		1, 2, 3	'10'		'01'	
N_{oc} Note 2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1	-98			
		2				
		3				
PRS $\hat{E}_s/I_{ot}$	dB	1	-Infinity	-3	-Infinity	-10
		2				
		3				
PRS $\hat{E}_s/N_{oc}$	dB	1	-Infinity	-3	-Infinity	-10
		2				
		3				
PRS-RSRP Note 3	dBm/SCS kHz	1	-Infinity	-101	-Infinity	-108
		2	-Infinity	-101	-Infinity	-108

		3	-Infinity	-98	-Infinity	-105
SS-RSRP Note 3	dBm/SCS kHz	1	-88	-88	-88	-88
		2	-88	-88	-88	-88
		3	-85	-85	-85	-85
Io	dBm/9.36 MHz	1	N/A	-62.25	N/A	-62.25
	dBm/9.36 MHz	2		-62.25		-62.25
	dBm/38.16 MHz	3		-56.16		-56.16
Propagation Condition		1, 2, 3	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP/PRS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.8.2.1.2 Test Requirements

The UE shall perform and report the PRS-RSRP measurements for Cell 1 and Cell 2, within the time limit specified in clause 5.6.3.5, starting from the beginning of time interval T2.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.8.2.2 PRS-RSRP reporting delay test case with reduced number of samples in RRC_INACTIVE

A.6.8.2.2.1 Test purpose and Environment

The purpose of the test is to verify that the PRS-RSRP measurement meets the delay requirements specified in clause 5.6.3.5 in an environment with AWGN propagation conditions when single-sample measurements are requested by the LMF. This test is applicable to UEs that support [FG 14-2 PRS measurement for reduced sample in RRC_inactive state].

The supported test configurations are specified in Table A.6. 8.2.2.1-1.

Table A.6. 8.2.2.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

In the test there are two synchronous cells: Cell 1 and Cell 2. Cell 1 is the reference as well as the PCell. Cell 2 is a neighbour cell. Both cells are on the same NR RF channel in FR1.

The test consists of two consecutive time intervals, with duration of T1 and T2. The UE shall be in RRC_CONNECTED state during T1 and in RRC_INACTIVE state during T2. During time duration T1, the UE shall not have any timing information of Cell 2. Both cells transmit PRS during T2. PRS resources from both cells are transmitted within the initial DL BWP of the UE and with the same numerology as the initial DL BWP.

The beginning of the time interval T2 shall be aligned with the beginning of the first DRX cycle in RRC_INACTIVE.

The *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message as defined in TS 37.355 shall be provided to the UE during T1. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where ΔT = 50 ms is the maximum processing time of the *DL-AoD assistance* data and location information request.

The *nr-DL-AoD-RequestLocationInformation* IE should indicate to the UE that single-sample measurements are requested, i.e. requestedDL-PRS-ProcessingSamples-r17 is set to m1.

The general test parameters are listed in Table A.6.8.2.2.1-2, and cell specific test parameters are listed in Table A.6.8.2.2.1-3.

Table A.6.8.2.2.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Reference cell		1, 2, 3	Cell 1	Cell 1 is the PCell and the DL-AoD reference cell in the positioning assistance data.
Neighbour cell		1, 2, 3	Cell 2	Cell 2 is a neighbour cell in the positioning assistance data.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2	
$BW_{channel}$	MHz	1	10: $N_{RB,c}$ = 52	
		2	10: $N_{RB,c}$ = 52	
		3	40: $N_{RB,c}$ = 106	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
CP length		1, 2, 3	Normal	
DRX cycle length	s	1, 2, 3	1.28	
Time offset between serving and neighbour cells	μs	1, 2, 3	3	Synchronous cells
Expected RSTD	μs	1, 2, 3	3	
Expected RSTD uncertainty	μs	1, 2, 3	5	
T1	s	1, 2, 3	3	
T2	s	1, 2, 3	[5]	

Table A.6.8.2.2.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
		1	CR.1.1 FDD		N/A	

RMSI CORESET RMC configuration		2	CR.1.1 TDD			
		3	CR.2.1 TDD			
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD			
		3	CCR.2.1 TDD			
OCNG Patterns		1, 2, 3	OP.1		OP.1	
TRS Configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD			
		3	TRS.1.2 TDD			
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		N/A	
PRS configuration Note 5		1	PRS.1.2 FR1		PRS.1.2 FR1	
		2	PRS.1.2 FR1		PRS.1.2 FR1	
		3	PRS.2.2 FR1		PRS.2.2 FR1	
PRS Resource slot offset	slots	1, 2, 3	0		0	
PRS muting info		1, 2, 3	'10'		'01'	
N_{oc} Note 2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1	-98			
		2				
		3				
PRS $\hat{E}_s/I_{ot}$	dB	1	-Infinity	0	-Infinity	-3
		2				
		3				
PRS $\hat{E}_s/N_{oc}$	dB	1	-Infinity	0	-Infinity	-3
		2				
		3				
PRS-RSRP Note 3	dBm/SCS kHz	1	-Infinity	-98	-Infinity	-101
		2	-Infinity	-98	-Infinity	-101
		3	-Infinity	-95	-Infinity	-98
SS-RSRP Note 3	dBm/SCS kHz	1	-98	-98	-98	-98
		2	-98	-98	-98	-98
		3	-95	-95	-95	-95
Io Note 3	dBm/9.36 MHz	1	N/A	-67.04	N/A	-68.29
	dBm/9.36 MHz	2		-67.04		-68.29
	dBm/38.16 MHz	3		-62.19		-62.99
Propagation Condition		1, 2, 3	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP/PRS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Io levels apply only for symbols where PRS is transmitted.

Note 4: OCNG shall be used such that all active cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols, except for slots where PRS is transmitted by any of the cells.

Note 5: The number of PRS RBs is the same as for the channel BW.

A.6.8.2.2.2 Test Requirements

The UE shall perform and report the PRS-RSRP measurements for Cell 1 and Cell 2, within the time limit specified in clause 5.6.3.5, starting from the beginning of time interval T2.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.8.3 UE Rx-Tx time difference measurements

A.6.8.3.1 UE Rx-Tx time difference measurement for single positioning frequency layer in FR1 SA

A.6.8.3.1.1 Test purpose and environment

The purpose of the test is to verify that the UE Rx-Tx measurement in RRC_INACTIVE state meets the requirements specified in clause 5.6.4 in AWGN propagation condition in FR1 in standalone scenario when single positioning frequency layer is configured.

The supported test configurations in listed in Table A.6.8.3.1.1-1.

Table A.6.8.3.1.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are two cells in the test: PCell (Cell 1) and a neighbour cell (Cell 2). Both cells are on the same RF channel in FR1.

The test consists of two consecutive time intervals, with duration of T1 and T2. Cell 1 and Cell 2 mute PRS transmission during T1 and transmit PRS during T2.

The *NR-Multi-RTT-ProvideAssistanceData* and *nr-Multi-RTT-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last slot containing the two messages for the assistance data and location information request is denoted as #n. In the next DL slot after slot #n, UE is released into RRC_INACTIVE.

The beginning of the time interval T2 is the first PRS resource occasion occurring ΔT after the slot #n, where ΔT = 50 ms is the maximum processing time of the assistance data and location information request.

The UE is configured to transmit positioning SRS during T2.

The general test parameters and cell specific test parameters are as given in Table A.6.8.3.1.1-2 and Table A.6.8.3.1.1-3 respectively.

Table A.6.8.3.1.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3	Cell 1	Cell 1 is the PCell in *NR-Multi-RTT-ProvideAssistanceData* [34].
Neighbour cell		1, 2, 3	Cell 2	Cell 2 is a neighbour cell in *NR-Multi-RTT-ProvideAssistanceData* [34].

RF Channel Number		1, 2, 3	1	For both Cell 1 and Cell 2
$BW_{channel}$	MHz	1	10: $N_{RB,c}$ = 52	
		2	10: $N_{RB,c}$ = 52	
		3	40: $N_{RB,c}$ = 106	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
CP length		1, 2, 3	Normal	
DRX cycle		1, 2, 3	1.28s	
Time offset between serving and neighbour cells	µs	1, 2, 3	3	Synchronous cells
T1	s	1, 2, 3	5	
T2	s	1, 2, 3	[10]	

Table A.6.8.3.1.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD			
		3	CR.2.1 TDD			
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD			
		3	CCR.2.1 TDD			
OCNG Patterns		1, 2, 3	OP.1		OP.1	
EPRE ratio of PSS to SSS	dB	1, 2, 3	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS Note 1						
EPRE ratio of OCNG to OCNG DMRS Note 1						
EPRE ratio of PRS to SSS						
TRS Configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD			
		3	TRS.1.2 TDD			
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		N/A	

PRS configuration		1	PRS.1.2 FR1		PRS.1.2 FR1	
		2	PRS.1.2 FR1		PRS.1.2 FR1	
		3	PRS.2.2 FR1		PRS.2.2 FR1	
PRS muting info		1, 2, 3	'10'		'01'	
SRS configuration		1	POS-SRS.1		N/A	
		2	POS-SRS.1		N/A	
		3	POS-SRS.2		N/A	
N_{oc} Note 2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1	-98			
		2				
		3				
PRS $\hat{E}_s/I_{ot}$	dB	1	-Infinity	-2.41	-Infinity	-12.12
		2				
		3				
PRS $\hat{E}_s/N_{oc}$	dB	1	-Infinity	-2	-Infinity	-10
		2				
		3				
PRP Note 3	dBm/SCS kHz	1	-Infinity	-100	-Infinity	-108
		2	-Infinity	-100	-Infinity	-108
		3	-Infinity	-97	-Infinity	-105
Io	dBm/9.36 MHz	1	N/A	-67.67	N/A	-67.67
	dBm/9.36 MHz	2		-67.67		-67.67
	dBm/38.16 MHz	3		-61.57		-61.57
Propagation Condition		1, 2, 3	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: PRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

A.6.8.3.1.2 Test requirements

The UE Rx-Tx time difference measurement time in RRC_INACTIVE state fulfils the requirements specified in clause 5.6.4.

The UE shall perform and report the UE Rx-Tx time difference measurements for Cell 1 and Cell 2 within the specified UE Rx-Tx time difference measurement time starting from the beginning of time interval T2.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported UE Rx-Tx measurement for each correct event shall be within the UE Rx-Tx reporting range specified in clause 10.1.25.3.1.

A.6.8.3.2 UE Rx-Tx time difference measurement with reduced number of samples in RRC_INACTIVE, FR1 SA

A.6.8.3.2.1 Test purpose and environment

The purpose of the test is to verify that the UE Rx-Tx measurement meets the requirements specified in clause 5.6.4.5 in AWGN propagation condition in FR1 in standalone scenario when single-sample measurements are

requested by the LMF. This test is applicable to UEs that support [FG 14-2 PRS measurement for reduced sample in RRC_inactive state].

The supported test configurations in listed in Table A.6.8.3.2.1-1.

Table A.6.8.3.2.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are two cells in the test: PCell (Cell 1) and a neighbour cell (Cell 2). All cells are on the same RF channel in FR1.

The test consists of two consecutive time intervals, with duration of T1 and T2. The UE shall be in RRC_CONNECTED state during T1 and in RRC_INACTIVE state during T2. During time duration T1, the UE shall not have any timing information of Cell 2. Both cells transmit PRS during T2. PRS resources from both cells are transmitted within the initial DL BWP of the UE and with the same numerology as the initial DL BWP.

The beginning of the time interval T2 shall be aligned with the beginning of the first DRX cycle in RRC_INACTIVE.

The *NR-Multi-RTT-ProvideAssistanceData* and *nr-Multi-RTT-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where $\Delta T = 50$ ms is the maximum processing time of the multi-RTT assistance data and location information request.

The *nr-Multi-RTT-RequestLocationInformation* IE should indicate to the UE that single-sample measurements are requested, i.e. requestedDL-PRS-ProcessingSamples-r17 is set to m1.

The UE is configured to transmit SRS during T2.

The general test parameters and cell specific test parameters are as given in Table A.6.8.3.2.1-2 and Table A.6.8.3.2.1-3 respectively.

Table A.6.8.3.2.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3	Cell 1	Cell 1 is the PCell in *NR-Multi-RTT-ProvideAssistanceData* [34].
Neighbour cell		1, 2, 3	Cell 2	Cell 2 is a neighbour cell in *NR-Multi-RTT-ProvideAssistanceData* [34].
RF Channel Number		1, 2, 3	1	For both Cell 1 and Cell 2
$BW_{channel}$	MHz	1	10: $N_{RB,c} = 52$	
		2	10: $N_{RB,c} = 52$	
		3	40: $N_{RB,c} = 106$	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	

CP length		1, 2, 3	Normal	
DRX cycle length	s	1, 2, 3	1.28	
Time offset between serving and neighbour cells	µs	1, 2, 3	3	Synchronous cells
T1	s	1, 2, 3	3	
T2	s	1, 2, 3	5	

Table A.6.8.3.2.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD			
		3	CR.2.1 TDD			
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD			
		3	CCR.2.1 TDD			
OCNG Patterns		1, 2, 3	OP.1		OP.1	
TRS Configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD			
		3	TRS.1.2 TDD			
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		N/A	
PRS configuration Note 5		1	PRS.1.2 FR1		PRS.1.2 FR1	
		2	PRS.1.2 FR1		PRS.1.2 FR1	
		3	PRS.2.2 FR1		PRS.2.2 FR1	
PRS Resource slot offset	slots	1, 2, 3	0		0	
PRS muting info		1, 2, 3	'10'		'01'	
N_{oc} Note 2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1	-98			
		2				
		3				
PRS $\hat{E}_s/I_{ot}$	dB	1	-Infinity	0	-Infinity	-3
		2				
		3				
PRS $\hat{E}_s/N_{oc}$	dB	1	-Infinity	0	-Infinity	-3
		2				
		3				
PRS-RSRP Note 3	dBm/SCS kHz	1	-Infinity	-98	-Infinity	-101
		2	-Infinity	-98	-Infinity	-101
		3	-Infinity	-95	-Infinity	-98

SS-RSRP Note 3	dBm/SCS kHz	1	-98	-98	-98	-98
		2	-98	-98	-98	-98
		3	-95	-95	-95	-95
Io Note 3	dBm/9.36 MHz	1	N/A	-67.04	N/A	-68.29
	dBm/9.36 MHz	2		-67.04		-68.29
	dBm/38.16 MHz	3		-62.19		-62.99
Propagation Condition		1, 2, 3	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP/PRS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Io levels apply only for symbols where PRS is transmitted.

Note 4: OCNG shall be used such that all active cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols, except for slots where PRS is transmitted by any of the cells.

Note 5: The number of PRS RBs is the same as for the channel BW.

A.6.8.3.2.2 Test requirements

The UE Rx-Tx time difference measurement time fulfils the requirements specified in clause 5.6.4.5.

The UE shall perform and report the UE Rx-Tx time difference measurements for Cell 1 and Cell 2 within the specified UE Rx-Tx time difference measurement time starting from the beginning of time interval T2.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported UE Rx-Tx measurement for each correct event shall be within the UE Rx-Tx reporting range specified in clause 10.1.25.3.1.

A.6.8.4 PRS-RSRPP measurements

A.6.8.4.1 PRS-RSRPP reporting delay test case for single positioning frequency layer in FR1 in RRC_INACTIVE state

A.6.8.4.1.1 Test purpose and Environment

The purpose of the test is to verify that the PRS-RSRPP measurement meets the delay requirements specified in clause 5.6.5.5 in an environment with AWGN propagation conditions.

The supported test configurations are specified in Table A.6.8.4.1.1-1.

Table A.6.8.4.1.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

The test consists of two consecutive time intervals, with duration of T1 and T2. During time duration T1, the UE shall be in RRC_CONNECTED state and shall not have any timing information of Cell 2. During T2 UE shall be in RRC_INACTIVE state and all both cells transmit PRS resources within initial DL BWP of the UE and with the same numerology as the initial DL BWP.

The *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message as defined in TS 37.355 shall be provided to the UE during T1. The last slot containing the two messages for the assistance data and location information request is denoted as #n.

The beginning of the time interval T2 shall be aligned with the beginning of the first DRX cycle containing the PRS resources that is ΔT after slot #n, where ΔT = 50 ms is the maximum processing time of the assistance data and location information request.

The general test parameters are listed in Table A.6.8.4.1.1-2, and cell specific test parameters are listed in Table A.6.8.4.1.1-3.

Table A.6.8.4.1.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Reference cell		1, 2, 3	Cell 1	Cell 1 is the PCell and the DL-AoD reference cell in the positioning assistance data.
Neighbour cell		1, 2, 3	Cell 2	Cell 2 is a neighbour cell in the positioning assistance data.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2	
$BW_{channel}$	MHz	1	10: $N_{RB,c}$ = 52	
		2	10: $N_{RB,c}$ = 52	
		3	40: $N_{RB,c}$ = 106	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
CP length		1, 2, 3	Normal	
DRX	s	1, 2, 3	1.28	ON
Time offset between serving and neighbour cells	µs	1, 2, 3	3	Synchronous cells
Expected RSTD	µs	1, 2, 3	3	
Expected RSTD uncertainty	µs	1, 2, 3	5	
T1	s	1, 2, 3	2	
T2	s	1, 2, 3	[5]	

Table A.6.8.4.1.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD			
		3	CR.2.1 TDD			
		1	CCR.1.1 FDD		N/A	

Dedicated CORESET RMC configuration		2	CCR.1.1 TDD			
		3	CCR.2.1 TDD			
OCNG Patterns		1, 2, 3	OP.1		OP.1	
TRS Configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD			
		3	TRS.1.2 TDD			
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		N/A	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1		N/A	
PRS configuration		1	PRS.1.4 FR1		PRS.1.4 FR1	
		2	PRS.1.4 FR1		PRS.1.4 FR1	
		3	PRS.2.4 FR1		PRS.2.4 FR1	
PRS muting info		1, 2, 3	'10'		'01'	
N_{oc} Note 2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1	-98			
		2				
		3				
PRS $\hat{E}_s/I_{ot}$	dB	1	-Infinity	-3	-Infinity	-10
		2				
		3				
PRS $\hat{E}_s/N_{oc}$	dB	1	-Infinity	-3	-Infinity	-10
		2				
		3				
PRS-RSRP Note 3	dBm/SCS kHz	1	-Infinity	-101	-Infinity	-108
		2	-Infinity	-101	-Infinity	-108
		3	-Infinity	-98	-Infinity	-105
SS-RSRP Note 3	dBm/SCS kHz	1	-88	-88	-88	-88
		2	-88	-88	-88	-88
		3	-85	-85	-85	-85
Io	dBm/9.36 MHz	1	N/A	-62.25	N/A	-62.25
	dBm/9.36 MHz	2		-62.25		-62.25
	dBm/38.16 MHz	3		-56.16		-56.16
Propagation Condition		1, 2, 3	AWGN			

Note 1: The resources for uplink transmission are assigned after the end of time period T2 to UEs that do not support SDT for measurement reporting.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP/PRS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.8.4.1.2 Test Requirements

The UE shall perform and report the PRS-RSRPP measurements for Cell 1 and Cell 2, within the time limit specified in clause 5.6.5.5, starting from the beginning of time interval T2.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.8.4.2 PRS-RSRPP reporting delay test case for single positioning frequency layer in FR1 in RRC_INACTIVE state for reduced number of samples

A.6.8.4.2.1 Test purpose and Environment

The purpose of the test is to verify that the PRS-RSRPP measurement meets the delay requirements specified in clause 5.6.5.5 in an environment with AWGN propagation conditions for reduced number of samples. In this test UE that supports *supportedDL-PRS-ProcessingSamples* is configured by LMF to perform PRS measurement with reduced number of samples.

The supported test configurations are specified in Table A.6.8.4.2.1-1.

Table A.6.8.4.2.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

The test consists of two consecutive time intervals, with duration of T1 and T2. During time duration T1, the UE shall be in RRC_CONNECTED state and shall not have any timing information of Cell 2. During T2 UE shall be in RRC_INACTIVE state and both cells transmit PRS resources within initial DL BWP of the UE and with the same numerology as the initial DL BWP.

The *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message as defined in TS 37.355 shall be provided to the UE during T1. The last slot containing the two messages for the assistance data and location information request is denoted as #n.

The beginning of the time interval T2 shall be aligned with the beginning of the first DRX cycle containing the PRS resources that is ΔT after slot #n, where ΔT = 50 ms is the maximum processing time of the assistance data and location information request.

The general test parameters are listed in Table A.6.8.4.2.1-2, and cell specific test parameters are listed in Table A.6.8.4.2.1-3.

Table A.6.8.4.2.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Reference cell		1, 2, 3	Cell 1	Cell 1 is the PCell and the DL-AoD reference cell in the positioning assistance data.
Neighbour cell		1, 2, 3	Cell 2	Cell 2 is a neighbour cell in the positioning assistance data.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2	
$BW_{channel}$	MHz	1	10: $N_{RB,c}$ = 52	
		2	10: $N_{RB,c}$ = 52	
		3	40: $N_{RB,c}$ = 106	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
CP length		1, 2, 3	Normal	
DRX	s	1, 2, 3	1.28	ON

Time offset between serving and neighbour cells	µs	1, 2, 3	3	Synchronous cells
Expected RSTD	µs	1, 2, 3	3	
Expected RSTD uncertainty	µs	1, 2, 3	5	
T1	s	1, 2, 3	2	
T2	s	1, 2, 3	[5]	

Table A.6.8.4.2.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD			
		3	CR.2.1 TDD			
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD			
		3	CCR.2.1 TDD			
OCNG Patterns		1, 2, 3	OP.1		OP.1	
TRS Configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD			
		3	TRS.1.2 TDD			
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		N/A	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1		N/A	
PRS configuration		1	PRS.1.4 FR1		PRS.1.4 FR1	
		2	PRS.1.4 FR1		PRS.1.4 FR1	
		3	PRS.2.4 FR1		PRS.2.4 FR1	
PRS BW		1,2,3	48 PRBs		48PRBs	
PRS muting info		1, 2, 3	‘10’		‘01’	
N_{oc} Note 2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1	-98			
		2				
		3				
PRS $\hat{E}_s / I_{ot}$	dB	1	-Infinity	-3	-Infinity	5
		2				
		3				
PRS $\hat{E}_s / N_{oc}$	dB	1	-Infinity	-3	-Infinity	5
		2				
		3				
PRS-RSRP Note 3	dBm/SCS kHz	1	-Infinity	-101	-Infinity	-93
		2	-Infinity	-101	-Infinity	-93
		3	-Infinity	-98	-Infinity	-90
SS-RSRP Note 3	dBm/SCS kHz	1	-88	-88	-88	-88
		2	-88	-88	-88	-88
		3	-85	-85	-85	-85
Io	dBm/9.36 MHz	1	N/A	-69.5	N/A	-67.9
	dBm/9.36 MHz	2		-69.5		-67.9
	dBm/38.16 MHz	3		-63.4		-61.8

Propagation Condition		1, 2, 3	AWGN

Note 1: The resources for uplink transmission are assigned after the end of time period T2 to UEs that do not support SDT for measurement reporting.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP/PRS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.8.4.2.2 Test Requirements

The UE shall perform and report the PRS-RSRPP measurements for Cell 1 and Cell 2, within the time limit specified in clause 5.6.5.5, starting from the beginning of time interval T2.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.9 Measurement performance requirements in RRC_INACTIVE

A.6.9.1 RSTD measurements

A.6.9.1.1 RSTD measurement accuracy test case for single positioning frequency layer in FR1 in RRC_INACTIVE state

A.6.9.1.1.1 Test purpose and Environment

The purpose of the test is to verify that the RSTD measurement in RRC_INACTIVE state meets the accuracy requirements specified in clause 10.1.23.2 in an environment with AWGN propagation conditions.

The supported test configurations are specified in Table A.6.9.1.1.1-1.

Table A.6.9.1.1.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

In the test there are two synchronous cells: Cell 1 and Cell 2. Cell 1 is the reference as well as the PCell. Cell 2 is a neighbour cell. Both cells are on the same NR RF channel in FR1. The UE is configured with DRX cycle of 1.28s. The *NR-TDOA-ProvideAssistanceData* and *NR-TDOA-RequestLocationInformation* message as defined in TS 37.355 shall be provided to the UE before the start of the test. The test duration should be larger than the UE measurement period as defined in clause 5.6.2.5.

Table A.6.9.1.1.1-2: RSTD accuracy test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
PRS ARFCN	1~3		freq1	Freq1	freq1	Freq1
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
	2		10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	

	3		40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
Duplex mode	1		FDD		FDD	
	2		TDD		TDD	
	3		TDD		TDD	
TDD configuration	1		N/A		N/A	
	2		TDDConf.1.1		TDDConf.1.1	
	3		TDDConf.2.1		TDDConf.2.1	
PDSCH Reference measurement channel	1		SR.1.1 FDD	-	SR.1.1 FDD	-
	2		SR.1.1 TDD		SR.1.1 TDD	
	3		SR.2.1 FDD		SR.2.1 FDD	
RMSI CORESET Reference Channel	1		CR.1.1 FDD	-	CR.1.1 FDD	-
	2		CR.1.1 TDD	-	CR.1.1 TDD	-
	3		CR.2.1 FDD	-	CR.2.1 FDD	-
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	2		CCR.1.1 TDD	-	CCR.1.1 TDD	-
	3		CCR.2.1 TDD	-	CCR.2.1 TDD	-
SSB configuration	1		SSB.1 FR1		SSB.1 FR1	
	2		SSB.1 FR1		SSB.1 FR1	
	3		SSB.2 FR1		SSB.2 FR1	
OCNG Patterns	1~3		OP.1		OP.1	
TRS configuration	1		TRS.1.1 FDD	-	TRS.1.1 FDD	
	2		TRS.1.1 TDD		TRS.1.1 TDD	
	3		TRS.1.2 TDD		TRS.1.2 TDD	
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Time offset with Cell 1	1	µs	-	3	-	3
	2,3		-	3	-	3
SMTC configuration	1		SMTC.2		SMTC.2	
	2,3		SMTC.1		SMTC.1	
PRS configuration	1		PRS.1.4 FR1		PRS.1.4 FR1	
	2		PRS.1.4 FR1		PRS.1.4 FR1	
	3		PRS.2.4 FR1		PRS.2.4 FR1	
PRS muting info	1~3		'10'	'01'	'10'	'01'
Expected RSTD	1, 2, 3	µs	N/A	3	N/A	3
Expected RSTD uncertainty	1, 2, 3	µs	N/A	5	N/A	5
EPRE ratio of PSS to SSS	1~3	dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS Note 1						
EPRE ratio of OCNG to OCNG DMRS Note 1						
N_{oc} Note2	1,2	dBm/ SCS	-98		-98	
	3		-95		-95	

$\hat{E}_s/I_{ot}$	1~3	dB	-6	-13	-6	-13
PRS-RSRP[Note3]	1,2	dBm/SCS	-104	-111	-104	-111
	3		-101	-108	-101	-108
Io[Note3]	1,2	dBm/9.36MHz	-69.07	-69.83	-69.07	-69.83
	3	dBm/38.16MHz	-62.98	-63.74	-62.98	-63.74
$\hat{E}_s/N_{oc}$	1~3	dB	-6	-13	-6	-13
Propagation condition	1~3	-	AWGN		AWGN	
Antenna configuration	1~3		1x2		1x2	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

A.6.9.1.1.2 Test Requirements

The RSTD measurement accuracy for Cell 2 shall fulfil the absolute requirement in clause 10.1.23.2.

A.6.9.1.2 RSTD measurement accuracy test case with reduced number of samples for single positioning frequency layer in FR1 in RRC_INACTIVE state

A.6.9.1.2.1 Test purpose and Environment

The purpose of the test is to verify that the RSTD measurement in RRC_INACTIVE state meets the accuracy requirements specified in clause 10.1.23.2 in an environment with AWGN propagation conditions. In this test UE that supports *supportedDL-PRS-ProcessingSamples* is configured by LMF to perform PRS measurement with reduced number of samples.

The supported test configurations are specified in Table A.6.9.1.2.1-1.

Table A.6.9.1.2.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

In the test there are two synchronous cells: Cell 1 and Cell 2. Cell 1 is the reference as well as the PCell. Cell 2 is a neighbour cell. Both cells are on the same NR RF channel in FR1. The UE is configured with DRX cycle of 1.28s. The *NR-TDOA-ProvideAssistanceData* and *NR-TDOA-RequestLocationInformation* message as defined in TS 37.355 shall be provided to the UE before the start of the test. The test duration should be larger than the UE measurement period as defined in clause 5.6.2.5.

Table A.6.9.1.2.1-2: RSTD accuracy test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
PRS ARFCN	1~3		freq1	Freq1	freq1	Freq1
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
	2		10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
	3		40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
Duplex mode	1		FDD		FDD	
	2		TDD		TDD	
	3		TDD		TDD	
TDD configuration	1		N/A		N/A	
	2		TDDConf.1.1		TDDConf.1.1	
	3		TDDConf.2.1		TDDConf.2.1	
PDSCH Reference measurement channel	1		SR.1.1 FDD	-	SR.1.1 FDD	-
	2		SR.1.1 TDD		SR.1.1 TDD	
	3		SR.2.1 FDD		SR.2.1 FDD	
RMSI CORESET Reference Channel	1		CR.1.1 FDD	-	CR.1.1 FDD	-
	2		CR.1.1 TDD	-	CR.1.1 TDD	-
	3		CR.2.1 FDD	-	CR.2.1 FDD	-
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	2		CCR.1.1 TDD	-	CCR.1.1 TDD	-
	3		CCR.2.1 TDD	-	CCR.2.1 TDD	-
SSB configuration	1		SSB.1 FR1		SSB.1 FR1	
	2		SSB.1 FR1		SSB.1 FR1	
	3		SSB.2 FR1		SSB.2 FR1	
OCNG Patterns	1~3		OP.1		OP.1	
TRS configuration	1		TRS.1.1 FDD	-	TRS.1.1 FDD	
	2		TRS.1.1 TDD		TRS.1.1 TDD	
	3		TRS.1.2 TDD		TRS.1.2 TDD	
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1		-	
Time offset with Cell 1	1	µs	-	3	-	3
	2,3		-	3	-	3
SMTC configuration	1		SMTC.2		SMTC.2	
	2,3		SMTC.1		SMTC.1	
PRS configuration	1		PRS.1.4 FR1		PRS.1.4 FR1	
	2		PRS.1.4 FR1		PRS.1.4 FR1	
	3		PRS.2.4 FR1		PRS.2.4 FR1	
PRS BW	1,2,3		48 PRBs			
PRS muting info	1~3		‘10’	‘01’	‘10’	‘01’
Expected RSTD	1, 2, 3	µs	N/A	3	N/A	3
Expected RSTD uncertainty	1, 2, 3	µs	N/A	5	N/A	5
EPRE ratio of PSS to SSS	1~3	dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						

EPRE ratio of PDSCH to PDSCH DMRS EPRE ratio of OCNG DMRS to SSS Note 1 EPRE ratio of OCNG to OCNG DMRS Note 1						
N_{oc} Note2	1,2	dBm/ SCS	-98		-98	
	3		-95		-95	
$\hat{E}_s / I_{ot}$	1~3	dB	-3	5	-3	5
PRS-RSRP Note3	1,2	dBm/SCS	-101	-93	-101	-93
	3		-98	-90	-98	-90
SS-RSRP Note3	1,2	dBm/SCS	-88	-88	-88	-88
	3		-85	-85	-85	-85
Io Note3	1,2	dBm/ 9.36MHz	-69.5	-67.9	-69.5	-67.9
	3	dBm/ 38.16MHz	-63.4	-61.8	-63.4	-61.8
$\hat{E}_s / N_{oc}$	1~3	dB	-3	5	-3	5
Propagation condition	1~3	-	AWGN		AWGN	
Antenna configuration	1~3		1x2		1x2	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

A.6.9.1.2.2 Test Requirements

The RSTD measurement accuracy for Cell 2 shall fulfil the absolute requirement in clause 10.1.23.2.

A.6.9.2 PRS-RSRP measurements

A.6.9.2.1 SA: measurement accuracy with PRS in FR1 in RRC_INACTIVE

A.6.9.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the PRS-RSRP measurement accuracy in RRC_INACTIVE is within the specified limits. This test will verify the requirements in clauses 10.1.24.2.1 and 10.1.24.2.2.

A.6.9.2.1.2 Test parameters

In this set of test cases all cells are on the same carrier frequency. Supported test configurations are shown in table A.6.9.2.1.2-1. Both absolute and relative accuracy of PRS-RSRP measurements are tested by using the parameters in A.6.9.2.1.2-2. In all test cases, Cell 1 is the PCell.

Table A.6.9.2.1.2-1: PRS-RSRP supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table A.6.9.2.1.2-2: PRS-RSRP test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
Cell ID			489	0	489	0
SSB ARFCN			freq1		freq1	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
BWP BW	Config 1		10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
Downlink initial BWP configuration			DLBWP.0.1			
Uplink initial BWP configuration			ULBWP.0.1			
DRX Cycle		ms	1280			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2		SR.1.1 TDD		SR.1.1 TDD	
	Config 3		SR2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	-	CR.1.1 FDD	-
	Config 2		CR.1.1 TDD		CR.1.1 TDD	
	Config 3		CR2.1 TDD		CR2.1 TDD	
Control channel RMC	Config 1		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3		CCR2.1 TDD		CCR2.1 TDD	
PRS configuration	Config 1		PRS.1.3 FR1	PRS.1.3 FR1	PRS.1.4 FR1	PRS.1.4 FR1
	Config 2		PRS.1.3 FR1	PRS.1.3 FR1	PRS.1.4 FR1	PRS.1.4 FR1
	Config 3		PRS.2.3 FR1	PRS.2.3 FR1	PRS.2.4 FR1	PRS.2.4 FR1
PRS Resource slot offset (slot)	Config 1,2,3	slot	0	4	0	4
SSB configuration	Config 1		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
	Config 2		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
	Config 3		SSB.2 FR1	SSB.2 FR1	SSB.2 FR1	SSB.2 FR1
Time offset with Cell 1	Config 1	ms	-	3	-	3

	Config 2,3		µs	-	3	-	3
SMTC configuration	Config 1			SMTC.2			
	Config 2,3			SMTC.1			
OCNG Patterns				OCNG pattern 1			
PDSCH/PDCCH subcarrier spacing	Config 1,2		kHz	15 kHz			
	Config 3			30 kHz			
EPRE ratio of PSS to SSS			dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H	dBm/15KhZ	-106		-88	
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H		Not applicable Note 5		-94	
N_{oc} Note2	Config 1,2		dBm/SCS	-106		-88	
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H		Not applicable Note 5		-91	
$\hat{E}_s/I_{ot}$			dB	2.46	-5.97	2.46	-5.97
$\hat{E}_s/N_{oc}$			dB	6	1	6	1

PRS-RSRP Note3	Config 1, 2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H	dBm/SCS	-100	-105	-82	-87
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H		Not applicable Note 5	Not applicable Note 5	-85	-90
Io Note3	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H	dBm/9.36MHz	-70.09		-52.09	
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H	dBm/38.16MHz	Not applicable Note 5		-51.99	
Propagation condition				AWGN			
Antenna configuration				1x2			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: PRS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: Subtest 1 is not used when testing with 30kHz SSB SCS.
Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification

A.6.9.2.1.3 Test Requirements

In each test, the absolute PRS-RSRP measurement for each cell shall fulfil the absolute accuracy requirement in clause 10.1.24.2.1. The relative PRS-RSRP measurement between the two PRS resources within the same cell shall fulfil the relative accuracy requirement in clause 10.1.24.2.2.

A.6.9.2.2 SA: measurement accuracy with PRS in FR1 with reduced number of samples in RRC_INACTIVE state

A.6.9.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the PRS-RSRP measurement accuracy is within the specified limits provided that PRS is transmitted within the initial BWP of the UE. UE can support *supportedDL-PRS-ProcessingSamples-INACTIVE*, and the LMF indicates the UE to perform positioning measurements with reduced number of samples N_{sample} via *reducedDL-PRS-ProcessingSamples*. This test will verify the requirements in clauses 10.1.24.2.1 and 10.1.24.2.2.

A.6.9.2.2.2 Test parameters

In this set of test cases all cells are on the same carrier frequency. Supported test configurations are shown in table A.6.9.2.2.2-1. Both absolute and relative accuracy of PRS-RSRP measurements are tested by using the parameters in A.6.9.2.2.2-2. In all test cases, Cell 1 is the PCell.

Table A.6.9.2.2.2-1: PRS-RSRP supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table A.6.9.2.2.2-2: PRS-RSRP test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
Cell ID			489	0	489	0
SSB ARFCN			freq1		freq1	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
BWP BW	Config 1		10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			

	Config 3		40: $N_{RB,c}$ = 106			
Downlink initial BWP configuration			DLBWP.0.1			
Uplink initial BWP configuration			ULBWP.0.1			
DRX Cycle		s	1.28			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2		SR.1.1 TDD		SR.1.1 TDD	
	Config 3		SR2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	-	CR.1.1 FDD	-
	Config 2		CR.1.1 TDD		CR.1.1 TDD	
	Config 3		CR2.1 TDD		CR2.1 TDD	
Control channel RMC	Config 1		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3		CCR2.1 TDD		CCR2.1 TDD	
PRS configuration	Config 1		PRS.1.1 FR1	PRS.1.1 FR1	PRS.1.1 FR1	PRS.1.1 FR1
	Config 2		PRS.1.1 FR1	PRS.1.1 FR1	PRS.1.1 FR1	PRS.1.1 FR1
	Config 3		PRS.2.1 FR1	PRS.2.1 FR1	PRS.2.1 FR1	PRS.2.1 FR1
PRS BW	Config 1		48 PRBs	48 PRBs	48 PRBs	48 PRBs
	Config 2		48 PRBs	48 PRBs	48 PRBs	48 PRBs
	Config 3		48 PRBs	48 PRBs	48 PRBs	48 PRBs
PRS Resource slot offset (slot)	Config 1,2,3	slot	0	4	0	4
SSB configuration	Config 1		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
	Config 2		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
	Config 3		SSB.2 FR1	SSB.2 FR1	SSB.2 FR1	SSB.2 FR1
Time offset with Cell 1	Config 1	ms	-	3	-	3
	Config 2,3	µs	-	3	-	3
SMTC configuration	Config 1		SMTC.2			
	Config 2,3		SMTC.1			
OCNG Patterns			OCNG pattern 1			
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
EPRE ratio of PSS to SSS		dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
EPRE ratio of PRS to SSS						
N_{oc} Note2	Config 1,2	dBm/15Khz	-98		-98	

	Config 3					
N_{oc} Note2	Config 1,2	dBm/SCS	-98		-98	
	Config 3		-95		-95	
$\hat{E}_s/I_{ot}$		dB	-3	-6	-3	-6
$\hat{E}_s/N_{oc}$		dB	-1.44	-3.65	-1.44	-3.65
PRS-RSRP Note3	Config 1, 2	dBm/SCS	-99.44	-101.65	-99.44	-101.65
	Config 3		-96.44	-98.65	-96.44	-98.65
Io Note3	Config 1,2	dBm/9.36MHz	-66.73		-66.73	
	Config 3	dBm/38.16MHz	-60.62		-60.62	
Propagation condition			AWGN			
Antenna configuration			1x2			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: PRS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.6.9.2.2.3 Test Requirements

In each test, the absolute PRS-RSRP measurement for each cell shall fulfil the absolute accuracy requirement in clause 10.1.24.2.1. The relative PRS-RSRP measurement between the two PRS resources within the same cell shall fulfil the relative accuracy requirement in clause 10.1.24.2.2.

A.6.9.3 UE Rx-Tx time difference measurements

A.6.9.3.1.1 UE Rx-Tx time difference measurement accuracy in FR1 SA

A.6.9.3.1.1.1 Test purpose and environment

The purpose of the test is to verify that the UE Rx-Tx time difference measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.25.2. The test is conducted in AWGN propagation condition in FR1 in standalone scenario.

The supported test configurations in listed in Table A.6.9.3.1.1.1-1.

Table A.6.9.3.1.1.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Note: The UE is only required to be tested in one of the supported test configurations.

There are two cells in the test: PCell (Cell 1) and a neighbour cell (Cell 2). All cells are on the same RF channel in FR1.

The *NR-Multi-RTT-ProvideAssistanceData* and *nr-Multi-RTT-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE before the start of the test.

The UE is configured to transmit SRS on Cell 1 during the test.

The test equipment measures the transmit timing of the UE using the transmitted SRS and measures the receive timing using the PRS. The test equipment then compares the difference of these two timings to the UE Rx-Tx measurement reported by the UE for each cell.

A.6.9.3.1.1.2 Test parameters

The UE Rx-Tx time difference accuracy test parameters are given in Table A.6.9.3.1.1.1-1.

Table A.6.9.3.1.1.1-1: UE Rx-Tx time difference measurement accuracy test parameters

Parameter	Unit	Test configuration	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
RF Channel Number		1,2,3	1	1	1	1
DRX	s	1,2,3	1.28		1.28	
Time offset with Cell 1	μs	1, 2, 3	N/A	3	N/A	3
TDD configuration		1	N/A	N/A	N/A	N/A
		2	TDDConf.1.1	TDDConf.1.1	TDDConf.1.1	TDDConf.1.1
		3	TDDConf.2.1	TDDConf.2.1	TDDConf.2.1	TDDConf.2.1
PDSCH RMC configuration		1	SR.1.1 FDD	N/A	SR.1.1 FDD	N/A
		2	SR.1.1 TDD		SR.1.1 TDD	
		3	SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET RMC configuration		1	CR.1.1 FDD	N/A	CR.1.1 FDD	N/A
		2	CR.1.1 TDD		CR.1.1 TDD	
		3	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD	N/A	CCR.1.1 FDD	N/A
		2	CCR.1.1 TDD		CCR.1.1 TDD	
		3	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns		1, 2, 3	OP.1	OP.1	OP.1	OP.1
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1	N/A	DLBWP.0.1 ULBWP.0.1	N/A
PRS configuration		1	PRS.1.1 FR1	PRS.1.1 FR1	PRS.1.1 FR1	PRS.1.1 FR1
		2	PRS.1.1 FR1	PRS.1.1 FR1	PRS.1.1 FR1	PRS.1.1 FR1
		3	PRS.2.1 FR1	PRS.2.1 FR1	PRS.2.1 FR1	PRS.2.1 FR1
PRS Resource slot offset	slot	1, 2, 3	0	4	0	4
SRS configuration		1	POS-SRS.1	N/A	POS-SRS.1	N/A
		2	POS-SRS.1	N/A	POS-SRS.1	N/A
		3	POS-SRS.2	N/A	POS-SRS.2	N/A
N_{oc} Note 2	dBm/SCS	1	-98		-98	
		2	-98		-98	

		3	-95		-95	
N_{oc} Note 2	dBm/15 kHz	1	-98		-98	
		2				
		3				
PRS $\hat{E}_s/I_{ot}$	dB	1	-2.41	-12.12	-2.41	-12.12
		2				
		3				
PRS $\hat{E}_s/N_{oc}$	dB	1	-2	-10	-2	-10
		2				
		3				
PRS-RSRP Note 3	dBm/SCS kHz	1	-100	-108	-100	-108
		2	-100	-108	-100	-108
		3	-97	-105	-97	-105
Io	dBm/9.36 MHz	1	-67.67	-67.67	-67.67	-67.67
	dBm/9.36 MHz	2	-67.67	-67.67	-67.67	-67.67
	dBm/38.16 MHz	3	-61.57	-61.57	-61.57	-61.57
Propagation Condition		1, 2, 3	AWGN		AWGN	

Note 1: Void.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: PRS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.9.3.1.1.3 Test requirements

The UE Rx-Tx time difference measurement time fulfils the UE Rx-Tx measurement accuracy requirements specified in clause 10.1.25.2 for both Cell 1 and Cell 2.

A.6.9.3.2 UE Rx-Tx time difference measurement accuracy with reduced number of samples

A.6.9.3.2.1 Test purpose and environment

The purpose of the test is to verify that the UE Rx-Tx time difference measurement accuracy with reduced number of samples in RRC_INACTIVE state is within the specified limits. This test will verify the requirements in clause 10.1.25.2. The test is conducted in AWGN propagation condition in FR1 in standalone scenario when single positioning frequency layer is configured.

The supported test configurations in listed in Table A.6.9.3.2.1-1.

Table A.6.9.3.2.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are two cells in the test: PCell (Cell 1) and a neighbour cell (Cell 2). Both cells are on the same RF channel in FR1.

The *NR-Multi-RTT-ProvideAssistanceData* and *nr-Multi-RTT-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE before the start of the test. The UE is configured to measure UE Rx-Tx time difference using reduced number of samples via *requestedDL-PRS-ProcessingSamples* in *NR-Multi-RTT-RequestLocationInformation*.

UE shall be configured to enter into RRC_INACTIVE state before the start of the test.

The UE is configured to transmit positioning SRS on Cell 1 during the test.

The test equipment measures the transmit timing of the UE using the transmitted SRS and measures the receive timing using the PRS. The test equipment then compares the difference of these two timings to the UE Rx-Tx measurement reported by the UE for each cell.

A.6.9.3.2.2 Test parameters

The UE Rx-Tx time difference accuracy test parameters are given in Table A.6.9.3.2.2-1.

Table A.6.9.3.2.2-1: UE Rx-Tx time difference measurement accuracy test parameters

Parameter	Unit	Test configuration	Test 1	
			Cell 1	Cell 2
RF Channel Number		1,2,3	1	1
DRX cycle		1,2,3	1.28s	
Time offset with Cell 1	μs	1, 2, 3	N/A	3
TDD configuration		1	N/A	N/A
		2	TDDConf.1.1	TDDConf.1.1
		3	TDDConf.2.1	TDDConf.2.1
PDSCH RMC configuration		1	SR.1.1 FDD	N/A
		2	SR.1.1 TDD	
		3	SR.2.1 TDD	
RMSI CORESET RMC configuration		1	CR.1.1 FDD	N/A
		2	CR.1.1 TDD	
		3	CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD	N/A
		2	CCR.1.1 TDD	
		3	CCR.2.1 TDD	
OCNG Patterns		1, 2, 3	OP.1	OP.1
EPRE ratio of PSS to SSS	dB	1, 2, 3	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				

EPRE ratio of PRS to SSS				
TRS Configuration		1	TRS.1.1 FDD	N/A
		2	TRS.1.1 TDD	
		3	TRS.1.2 TDD	
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1	N/A
PRS configuration		1	PRS.1.1 FR1	PRS.1.1 FR1
		2	PRS.1.1 FR1	PRS.1.1 FR1
		3	PRS.2.1 FR1	PRS.2.1 FR1
PRS BW		1	48 PRBs	48 PRBs
		2	48 PRBs	48 PRBs
		3	48 PRBs	48 PRBs
PRS Resource slot offset	slot	1, 2, 3	0	4
SRS configuration		1	POS-SRS.1	N/A
		2	POS-SRS.1	N/A
		3	POS-SRS.2	N/A
N_{oc} Note 2	dBm/SCS	1	-98	
		2	-98	
		3	-95	
N_{oc} Note 2	dBm/15 kHz	1	-98	
		2		
		3		
PRS $\hat{E}_s/I_{ot}$	dB	1	-1.76	-6.01
		2		
		3		
PRS $\hat{E}_s/N_{oc}$	dB	1	0	-3
		2		
		3		
PRP Note 3	dBm/SCS kHz	1	-98	-101
		2	-98	-101
		3	-95	-98
Io	dBm/9.36 MHz	1	-66.07	-66.07
	dBm/9.36 MHz	2	-66.07	-66.07
	dBm/38.16 MHz	3	-59.97	-59.97
Propagation Condition		1, 2, 3	AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: PRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.9.3.2.3 Test requirements

The UE Rx-Tx time difference measurement with reduced number of samples in RRC_INACTIVE state fulfils the UE Rx-Tx measurement accuracy requirements specified in clause 10.1.25.2 for both Cell 1 and Cell 2.

A.6.9.4 PRS-RSRPP measurements

A.6.9.4.1 SA: PRS-RSRPP measurement accuracy in FR1 in RRC INACTIVE

A.6.9.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that the PRS-RSRPP measurement accuracy in FR1 in RRC_INACTIVE state is within the specified limits. This test will verify the requirements in clauses [10.1.24.Z.1] and [10.1.24.Z.2].

A.6.9.4.1.2 Test parameters

In this set of test cases all cells are on the same carrier frequency. Supported test configurations are shown in table A.6.9.4.1.2-1. Both absolute and relative accuracy of PRS-RSRPP measurements are tested by using the parameters in A.6.9.4.1.2-2. In all test cases, Cell 1 is the PCell.

Table A.6.9.4.1.2-1: PRS-RSRPP supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table A.6.9.4.1.2-2: PRS-RSRPP test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
Cell ID			489	0	489	0
SSB ARFCN			freq1		freq1	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
BWP BW	Config 1		10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
Downlink initial BWP configuration			DLBWP.0.1			
Uplink initial BWP configuration			ULBWP.0.1			
TRS configuration	Config 1		TRS.1.1 FDD	NA	TRS.1.1 FDD	NA
	Config 2		TRS.1.1 TDD	NA	TRS.1.1 TDD	NA
	Config 3		TRS.1.2 TDD	NA	TRS.1.2 TDD	NA
DRX cycle length	Config 1,2,3	ms	1280			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2		SR.1.1 TDD		SR.1.1 TDD	
	Config 3		SR2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	-	CR.1.1 FDD	-
	Config 2		CR.1.1 TDD		CR.1.1 TDD	

		Config 3		CR2.1 TDD		CR2.1 TDD	
Control channel RMC		Config 1		CCR.1.1 FDD	-	CCR.1.1 FDD	-
		Config 2		CCR.1.1 TDD		CCR.1.1 TDD	
		Config 3		CCR2.1 TDD		CCR2.1 TDD	
PRS configuration		Config 1		PRS.1.3 FR1	PRS.1.3 FR1	PRS.1.4 FR1	PRS.1.4 FR1
		Config 2		PRS.1.3 FR1	PRS.1.3 FR1	PRS.1.4 FR1	PRS.1.4 FR1
		Config 3		PRS.2.3 FR1	PRS.2.3 FR1	PRS.2.4 FR1	PRS.2.4 FR1
PRS Resource slot offset (slot)		Config 1,2,3	slot	0	4	0	4
SSB configuration		Config 1		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
		Config 2		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
		Config 3		SSB.2 FR1	SSB.2 FR1	SSB.2 FR1	SSB.2 FR1
Time offset with Cell 1		Config 1	ms	-	3	-	3
		Config 2,3	µs	-	3	-	3
SMTC configuration		Config 1		SMTC.2			
		Config 2,3		SMTC.1			
OCNG Patterns				OCNG pattern 1			
PDSCH/PDCCH subcarrier spacing		Config 1,2	kHz	15 kHz			
		Config 3		30 kHz			
EPRE ratio of PSS to SSS			dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H	dBm/15KhZ	-106		-88	

	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H		Not applicable Note 5		-94	
N_{oc} Note2	Config 1,2		dBm/SCS	-106		-88	
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H		Not applicable Note 5		-91	
$\hat{E}_s/I_{ot}$			dB	2.46	-5.97	2.46	-5.97
$\hat{E}_s/N_{oc}$			dB	6	1	6	1
PRS-RSRP Note3	Config 1, 2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H	dBm/SCS	-100	-105	-82	-87
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H		Not applicable Note 5	Not applicable Note 5	-85	-90
Io Note3	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6, NR_SDL_FR1_A,	dBm/9.36MHz	-70.09		-52.09	

		NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H			
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H	dBm/38.16MHz	Not applicable Note 5	-51.99
Propagation condition				[Two-tap channel] Note 7	
Antenna configuration				1x2	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: PRS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: Subtest 1 is not used when testing with 30kHz SSB SCS.
Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification
Note 7: The two-tap channel model is defined in 38.101-4 Annex B.2.4 (a = 1, τ_d=0.45 μs and f_D=5 Hz).

A.6.9.4.1.3 Test Requirements

In each test, the absolute PRS-RSRPP measurement for each cell shall fulfil the absolute accuracy requirement in clause [10.1.24.Z.1]. The relative PRS-RSRPP measurement between the two PRS resources within the same cell shall fulfil the relative accuracy requirement in clause [10.1.24.Z.2].

A.6.9.4.2 SA: measurement accuracy with reduced PRS samples in FR1 in RRC INACTIVE

A.6.9.4.2.1 Test Purpose and Environment

The purpose of this test is to verify that the PRS-RSRPP measurement accuracy with N_{sample} = 1 in FR1 in RRC_INACTIVE state is within the specified limits. This test will verify the requirements in clauses [10.1.24.Z.1] and [10.1.24.Z.2].The UE under test should support [*supportedDL-PRS-ProcessingSamples-RRC-Inactive*], and the TE indicates the UE to perform positioning measurements with reduced number of samples. The PRS bandwidth is contained within the initial DL BWP and the power difference between the serving cell SS-RSRP and neighbour cell PRS-RSRP is within [6]dB, so that N_{sample}= 1 is assumed.

A.6.9.4.2.2 Test parameters

In this set of test cases all cells are on the same carrier frequency. Supported test configurations are shown in table A.6.9.4.2.2-1. Both absolute and relative accuracy of PRS-RSRPP measurements are tested by using the parameters in A.6.9.4.2.2-2. In all test cases, Cell 1 is the PCell.

Table A.6.9.4.2.2-1: PRS-RSRPP supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table A.6.9.4.2.2-2: PRS-RSRPP test parameters

Parameter		Unit	Test 1	
			Cell 1	Cell 2
Cell ID			489	0
SSB ARFCN			freq1	
Duplex mode	Config 1		FDD	
	Config 2,3		TDD	
TDD configuration	Config 1		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52	
	Config 2		10: $N_{RB,c}$ = 52	
	Config 3		40: $N_{RB,c}$ = 106	
BWP BW	Config 1		10: $N_{RB,c}$ = 52	
	Config 2		10: $N_{RB,c}$ = 52	
	Config 3		40: $N_{RB,c}$ = 106	
Downlink initial BWP configuration			DLBWP.0.1	
Uplink initial BWP configuration			ULBWP.0.1	
TRS configuration	Config 1		TRS.1.1 FDD	NA
	Config 2		TRS.1.1 TDD	NA
	Config 3		TRS.1.2 TDD	NA
DRX Cycle length	Config 1,2,3	ms	1280	
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	-
	Config 2		SR.1.1 TDD	
	Config 3		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	-
	Config 2		CR.1.1 TDD	
	Config 3		CR2.1 TDD	
Control channel RMC	Config 1		CCR.1.1 FDD	-
	Config 2		CCR.1.1 TDD	
	Config 3		CCR2.1 TDD	
PRS configuration	Config 1		PRS.1.4 FR1	PRS.1.4 FR1
	Config 2		PRS.1.4 FR1	PRS.1.4 FR1
	Config 3		PRS.2.4 FR1	PRS.2.4 FR1
PRS bandwidth	Config 1,2,3		48 PRBs	48 PRBs
PRS Resource slot offset (slot)	Config 1,2,3	slot	0	4
SSB configuration	Config 1		SSB.1 FR1	SSB.1 FR1
	Config 2		SSB.1 FR1	SSB.1 FR1
	Config 3		SSB.2 FR1	SSB.2 FR1
Time offset with Cell 1	Config 1	ms	-	3

	Config 2,3	μs	-	3
SMTC configuration	Config 1		SMTC.2	
	Config 2,3		SMTC.1	
OCNG Patterns			OCNG pattern 1	
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz	
	Config 3		30 kHz	
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	Config 1,2	dBm/15KhZ	-98	
	Config 3			
N_{oc} Note2	Config 1,2	dBm/SCS	-98	
	Config 3		-95	
$\hat{E}_s/I_{ot}$		dB	2.46	-5.97
$\hat{E}_s/N_{oc}$		dB	6	1
PRS-RSRP Note3	Config 1, 2	dBm/SCS	-92	-97
	Config 3		-89	-94
SS-RSRP Note3	Config 1, 2	dBm/SCS	-92	-97
	Config 3		-89	-94
Io Note3	Config 1,2	dBm/9.36MHz	-70.09	
	Config 3	dBm/38.16MHz	-63.99	
Propagation condition			[Two-tap channel] Note5	
Antenna configuration			1x2	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: PRS-RSRP, SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: The two-tap channel model is defined in 38.101-4 Annex B.2.4 (a = 1, τ_d=0.45 μs and f_D=5 Hz).

A.6.9.4.2.3 Test Requirements

In each test, the absolute PRS-RSRPP measurement for each cell shall fulfil the absolute accuracy requirement in clause [10.1.24.Z.1]. The relative PRS-RSRPP measurement between the two PRS resources within the same cell shall fulfil the relative accuracy requirement in clause [10.1.24.Z.2].

A.7 NR standalone tests with one or more NR cells in FR2

A.7.1 SA: RRC_IDLE state mobility

A.7.1.1 Cell re-selection to NR

A.7.1.1.1 Cell reselection to FR2 intra-frequency NR case

A.7.1.1.1.1 Test Purpose and Environment

This test is to verify the requirement for the intra frequency NR cell reselection requirements specified in clause 4.2.2.3.

A.7.1.1.1.2 Test Parameters

The test scenario comprises of 1 NR carrier and 2 cells as given in tables A.7.1.1.1.2-1, A.7.1.1.1.2-2 and A.7.1.1.1.2-3. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Only cell 1 is already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2.

Table A.7.1.1.1.2-1: Supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.7.1.1.1.2-2: General test parameters for intra frequency NR cell re-selection test case

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell1	
T2 end condition	Active cell		1, 2	Cell2	
	Neighbour cell		1, 2	Cell1	
Final condition	Active cell		1, 2	Cell1	
	Neighbour cell		1, 2	Cell2	
RF Channel Number			1, 2	1	
Time offset between cells			1, 2	3 µs	Synchronous cells
Access Barring Information		-	1, 2	Not Sent	No additional delays in random access procedure.
SMTC configuration			1, 2	SMTC.1	
DRX cycle length		s	1, 2	1.28	The value shall be used for all cells in the test.
PRACH configuration index			1, 2	190	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2	Not configured	

T1	s	1, 2	>7	During T1, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed, The intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T2
T2	s	1, 2	135	T2 needs to be defined so that cell re-selection reaction time is taken into account.
T3	s	1, 2	35	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.7.1.1.1.2-3: Cell specific test parameters for intra frequency NR cell re-selection test case in AWGN

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1, 2	TDDConf.3.1			TDDConf.3.1		
PDSCH RMC configuration		1	SR.3.1 TDD			SR.3.1 TDD		
		2	SR.3.1 TDD			SR.3.1 TDD		
RMSI CORESET RMC configuration		1	CR.3.1 TDD			CR.3.1 TDD		
		2	CR.3.1 TDD			CR.3.1 TDD		
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD			CCR.3.1 TDD		
		2	CCR.3.1 TDD			CCR.3.1 TDD		
SSB configuration		1	SSB.3 FR2			SSB.7 FR2		
		2	SSB.4 FR2			SSB.8 FR2		
OCNG Pattern		1, 2	OP.4			OP.4		
$BW_{channel}$	MHz	1, 2	100: $N_{RB,c}$ = 66			100: $N_{RB,c}$ = 66		
Data RBs allocated		1, 2	66			66		
Initial DL BWP configuration		1, 2	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2	SSB			SSB		
Qrxlevmin	dBm/SCS	1	-138			-138		
		2	-135			-135		
Pcompensation	dB	1, 2	0			0		
$Qhyst_s$	dB	1, 2	0			0		
$Qoffset_{s,n}$	dB	1, 2	0			0		
Cell_selection_and_reselection_quality_measurement		1, 2	SS-RSRP			SS-RSRP		
AoA setup		1, 2	Setup 1 defined in A.3.15.1			Setup 1 defined in A.3.15.1		
Beam assumption[Note 4]		1,2	Rough			Rough		
$\hat{E}_s/I_{ot}$ BB [Note 5]	dB	1	7.45	-3.55	0.95	-infinity	0.95	-3.55
		2						
N_{oc} [Note2]	dBm/SCS	1	-93					
		2	-90					
N_{oc} [Note2]	dBm/15 kHz	1	-102					
		2						
$\hat{E}_s/N_{oc}$	dB	1	8	-3	1.5	-infinity	1.5	-3
		2						
SS-RSRP [Note3]	dBm/SCS	1	-85	-96	-91.5	-infinity	-91.5	-96
		2	-82	-93	-88.5	-infinity	-88.5	-93

Io on SSB symbols of each cell	dBm/95.04 MHz	1	-60.53	-67.40	-65.34	-69.17	-65.34	-67.40
		2	-57.52	-64.39	-62.33	-66.16	-62.33	-64.39
Treselection	s	1, 2	0	0	0	0	0	0
SintrasearchP	dB	1, 2	50			50		
Propagation Condition		1, 2	AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Note 5: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

A.7.1.1.1.3 Test Requirements

The cell reselection delay to a newly detectable cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration updateon Cell 2.

The cell re-selection delay to a newly detectable cell shall be less than 130 s.

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration updateon cell 1.

The cell re-selection delay to an already detected cell shall be less than 27 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a newly detectable cell can be expressed as: $T_{detect, NR_Intra} + T_{SI\text{-}NR}$, and to an already detected cell can be expressed as: $T_{evaluate, NR_ intra} + T_{SI\text{-}NR}$,

Where:

T_{detect, NR_Intra} See Table 4.2.2.3-1 in clause 4.2.2.3

$T_{evaluate, NR_ intra}$ See Table 4.2.2.3-1 in clause 4.2.2.3

$T_{SI\text{-}NR}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 129.28 s, allow 130 s for the cell re-selection delay to a newly detectable cell and 26.88 s for the cell re-selection delay to an already detected cell in the test case, which we allow 27 s.

A.7.1.1.2 Cell reselection to FR2 inter-frequency NR case

A.7.1.1.2.1 Test Purpose and Environment

This test is to verify the requirement for the inter frequency NR cell reselection requirements specified in clause 4.2.2.4.

A.7.1.1.2.2 Test Parameters

The test scenario comprises of 2 cells on 2 different NR carriers respectively as given in tables A.7.1.1.2.2-1, A.7.1.1.2.2-2 and A.7.1.1.2.2-3. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas and cell 2 is of higher priority than cell 1. Furthermore, UE has not registered with network for the tracking area containing cell 2.

Table A.7.1.1.2.2-1: Supported test configurations

Configuration	Description for serving cell	Description for target cell
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.7.1.1.2.2-2: General test parameters for FR2 inter frequency NR cell re-selection test case

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell2	The UE camps on cell 2 in the initial phase and during T1 period the UE reselects to cell 1
	Neighbour cell		1, 2	Cell1	
T1 end condition	Active cell		1, 2	Cell1	The UE shall perform reselection to cell 1 during T1
	Neighbour cells		1, 2	Cell2	
T3 end condition	Active cell		1, 2	Cell2	The UE shall perform reselection to cell 2 with higher priority during T3
	Neighbour cell		1, 2	Cell1	
RF Channel Number			1, 2	1, 2	
Time offset between cells			1, 2	3 μs	Synchronous cells
Access Barring Information		-	1, 2	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR2	
			2	SSB.2 FR2	
SMTC configuration			1, 2	SMTC.1	
DRX cycle length		s	1, 2	1.28	The value shall be used for all cells in the test.
PRACH configuration index			1, 2	190	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2	Not configured	
T1		s	1, 2	35	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2		s	1, 2	>7	During T2, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T3.
T3		s	1, 2	95	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.7.1.1.2.2-3: Cell specific test parameters for FR2 inter frequency NR cell re-selection test case in AWGN

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1, 2	TDDConf.3.1			TDDConf.3.1		
PDSCH RMC configuration		1, 2	SR.3.1 TDD			SR.3.1 TDD		
RMSI CORESET parameters		1, 2	CR.3.1 TDD			CR.3.1 TDD		
RMSI CORESET RMC configuration		1, 2	CCR.3.1 TDD			CCR.3.1 TDD		
OCNG Pattern		1, 2	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1, 2	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2	SSB			SSB		
Qrxlevmin	dBm/SCS	1	-140			-140		
		2	-137			-137		
Pcompensation	dB	1, 2	0			0		
$Qhyst_s$	dB	1, 2	0			0		
$Qoffset_{s,n}$	dB	1, 2	0			0		
Cell_selection_and_reselection_quality_measurement		1, 2	SS-RSRP			SS-RSRP		
AoA setup		1, 2	Setup 1 defined in A.3.15.1			Setup 1 defined in A.3.15.1		
Beam assumption Note 4		1,2	Rough			Rough		
$\hat{E}_s/I_{ot\ BB}$ Note 5	dB	1	9.95	9.95	7.45	-11.05	-infinity	7.95
		2						
N_{oc} Note2	dBm/SCS	1	-93			-93		
		2	-90			-90		
N_{oc} Note2	dBm/15 kHz	1	-102			-102		
		2						
$\hat{E}_s/N_{oc}$	dB	1	10.5	10.5	8	-10.5	-infinity	8.5
		2						
SS-RSRP Note3	dBm/SCS	1	—82.5	-82.5	-85	-103.5	-infinity	-84.5
		2	-79.5	-79.5	-82	-100.5	-infinity	-81.5
Io	dBm/95.04 MHz	1, 2	-53.11	-53.11	-55.34	-63.61	-63.98	-54.91
Treselection	s	1, 2	0	0	0	0	0	0
SnonintrasearchP	dB	1, 2	50			50		
$Thresh_{x,highP}$	dB	1, 2	48			48		
$Thresh_{serving,lowP}$	dB	1, 2	44			44		
$Thresh_{x,lowP}$	dB	1, 2	50			50		
Propagation Condition		1, 2	AWGN			AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Note 5: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

A.7.1.1.2.3 Test Requirements

The cell reselection delay to a higher priority cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration updateon cell 2.

The cell re-selection delay to a higher priority cell shall be less than 87 s.

The cell reselection delay to a lower priority cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration updateon cell 1.

The cell re-selection delay to a lower priority cell shall be less than 27 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a higher priority cell can be expressed as: $T_{higher_priority_search} + T_{evaluate,\ NR_inter} + T_{SI\text{-}NR}$, and to a lower priority cell can be expressed as: $T_{evaluate,\ NR_inter} + T_{SI\text{-}NR}$,

Where:

$T_{higher_priority_search}$ See clause 4.2.2.7

$T_{evaluate,\ NR_inter}$ See Table 4.2.2.4-1 in clause 4.2.2.4

$T_{SI\text{-}NR}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 86.88 s, allow 87 s for the cell re-selection delay to a higher priority cell and 26.88 s for the cell re-selection delay to a lower priority cell in the test case, which we allow 27 s.

A.7.1.1.3 Cell reselection to FR2 intra-frequency NR case for UE fulfilling low mobility relaxed measurement criterion

A.7.1.1.3.1 Test Purpose and Environment

This test is to verify the requirement for the intra frequency NR cell reselection requirements for UE configured with relaxed measurement criterion specified in clause 4.2.2.9.2.

A.7.1.1.3.2 Test Parameters

The test scenario comprises of 1 NR carrier and 2 cells as given in tables A.7.1.1.3.2-1, A.7.1.1.3.2-2 and A.7.1.1.3.2-3. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. During T1 and T2, only criteria *lowMobilityEvalutation* is configured and fulfilled, where ($Srxlev_{Ref}$ – Srxlev) < $S_{SearchDeltaP}$. UE has not registered with network for the tracking area containing cell2.

Table A.7.1.1.3.2-1: Supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.7.1.1.3.2-2: General test parameters for FR2 intra-frequency NR cell re-selection test case for UE fulfilling low mobility criterion

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell1	The UE camps on cell 1 in the initial phase
	Neighbour cells		1, 2	Cell2	
T1 end condition	Active cell		1, 2	Cell2	The UE reselects to cell 2 during T1 period
	Neighbour cells		1, 2	Cell1	
Final condition	Active cell		1, 2	Cell1	The UE reselects to cell 1 during T2 period
	Neighbour cells		1,2	Cell2	
RF Channel Number			1, 2	1	
Time offset between cells			1, 2	3 μs	Synchronous cells
Access Barring Information		-	1, 2	Not Sent	No additional delays in random access procedure.
SMTC configuration			1, 2	SMTC pattern 1	
DRX cycle length		s	1, 2	0.64	The value shall be used for all cells in the test.
PRACH configuration index			1, 2	190	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2	Not configured	
T1		s	1, 2	100	
T2		s	1, 2	100	

Table A.7.1.1.3.2-3: Cell specific test parameters for FR2 intra-frequency NR cell re-selection test case in AWGN for UE fulfilling low mobility criterion

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2	TDDConf.3.1		TDDConf.3.1	
PDSCH RMC configuration		1	SR.3.1 TDD		SR.3.1 TDD	
		2	SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET RMC configuration		1	CR.3.1 TDD		CR.3.1 TDD	
		2	CR.3.1 TDD		CR.3.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD		CCR.3.1 TDD	
		2	CCR.3.1 TDD		CCR.3.1 TDD	
SSB configuration		1	SSB.3 FR2		SSB.7 FR2	
		2	SSB.4 FR2		SSB.8 FR2	
OCNG Pattern		1, 2	OP.4		OP.4	
$BW_{channel}$	MHz	1, 2	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		1, 2	66		66	
Initial DL BWP configuration		1, 2	DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		1, 2	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1, 2	SSB		SSB	
Qrxlevmin	dBm/SCS	1	-140		-140	
		2	-137		-137	
$S_{SearchDeltaP}$	dB	1, 2	6		6	
$T_{SearchDeltaP}$	s	1,2	5		5	
Pcompensation	dB	1, 2	0		0	
$Qhyst_s$	dB	1, 2	0		0	

$Qoffset_{s,n}$	dB	1, 2	0		0	
Cell_selection_and_reselection_quality_measurement		1, 2	SS-RSRP		SS-RSRP	
AoA setup		1, 2	Setup 1 defined in A.3.15.1		Setup 1 defined in A.3.15.1	
Beam assumption Note 4		1,2	Rough		Rough	
$\hat{E}_s / I_{ot}$ BB Note 5	dB	1	-3.55	0.95	0.95	-3.55
		2				
N_{oc} Note2	dBm/SCS	1	-93			
		2	-90			
N_{oc} Note2	dBm/15 kHz	1	-102			
		2				
$\hat{E}_s / N_{oc}$	dB	1	-3	1.5	1.5	-3
		2				
SS-RSRP Note3	dBm/SCS	1	-96	-91.5	-91.5	-96
		2	-93	-88.5	-88.5	-93
Io on SSB symbols of each cell	dBm/95.04 MHz	1	-67.40	-65.34	-65.34	-67.40
		2	-64.40	-62.34	-62.34	-64.40
Treselection	s	1, 2	0	0	0	0
SintrasearchP	dB	1, 2	50		50	
Propagation Condition		1, 2	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Note 5: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

A.7.1.1.3.3 Test Requirements

The cell reselection delay to an already detected cell for UE fulfilling low mobility relaxed criterion is defined as the time from the beginning of time period T1, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 2.

The cell re-selection delay to an already detected cell shall be less than 79 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to an already detectable cell can be expressed as: $T_{evaluate,\ NR_Intra} + T_{SI\text{-}NR}$,

Where:

$T_{evaluate,\ NR_Intra}$ See Table 4.2.2.9.2-1 in clause 4.2.2.9,

$T_{SI\text{-}NR}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 78.08 s, allow 79s for the cell re-selection delay to an already detected cell for UE fulfilling low mobility criterion in the test case.

A.7.1.1.4 Cell reselection to FR2 intra-frequency NR case for UE fulfilling not-at-cell edge relaxed measurement criterion

A.7.1.1.4.1 Test Purpose and Environment

This test is to verify the requirement for the intra frequency NR cell reselection requirements for UE configured with relaxed measurement criterion specified in clause 4.2.2.9.3.

A.7.1.1.4.2 Test Parameters

The test scenario comprises of 1 NR carrier and 2 cells as given in tables A.7.1.1.4.2-1, A.7.1.1.4.2-2 and A.7.1.1.4.2-3. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. During T1 and T2, only criteria *cellEdgeEvaluation* is configured and fulfilled, where Srxlev> $S_{SearchThresholdP}$. UE has not registered with network for the tracking area containing cell2.

Table A.7.1.1.4.2-1: Supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.7.1.1.4.2-2: General test parameters for FR2 intra-frequency NR cell re-selection test case for UE fulfilling not-at-cell edge criterion

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell1	The UE camps on cell 1 in the initial phase
	Neighbour cells		1, 2	Cell2	
T1 end condition	Active cell		1, 2	Cell2	The UE reselects to cell 2 during T1 period
	Neighbour cells		1, 2	Cell1	
Final condition	Active cell		1, 2	Cell1	
	Neighbour cells		1,2	Cell2	
RF Channel Number			1, 2	1	
Time offset between cells			1, 2	3 µs	Synchronous cells
Access Barring Information		-	1, 2	Not Sent	No additional delays in random access procedure.
SMTC configuration			1, 2	SMTC pattern 1	
DRX cycle length		s	1, 2	0.64	The value shall be used for all cells in the test.
PRACH configuration index			1, 2	190	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2	Not configured	
T1		s	1, 2	100	
T2		s	1, 2	100	

Table A.7.1.1.4.2-3: Cell specific test parameters for FR2 intra-frequency NR cell re-selection test case in AWGN for UE fulfilling not-at-cell edge criterion

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2	TDDConf.3.1		TDDConf.3.1	
PDSCH RMC configuration		1	SR.3.1 TDD		SR.3.1 TDD	
		2	SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET RMC configuration		1	CR.3.1 TDD		CR.3.1 TDD	
		2	CR.3.1 TDD		CR.3.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD		CCR.3.1 TDD	
		2	CCR.3.1 TDD		CCR.3.1 TDD	
SSB configuration		1	SSB.3 FR2		SSB.7 FR2	
		2	SSB.4 FR2		SSB.8 FR2	
OCNG Pattern		1, 2	OP.4		OP.4	
$BW_{channel}$	MHz	1, 2	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		1, 2	66		66	
Initial DL BWP configuration		1, 2	DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		1, 2	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1, 2	SSB		SSB	
Qrxlevmin	dBm/SCS	1	-140		-140	
		2	-137		-137	
Pcompensation	dB	1, 2	0		0	
$Qhyst_s$	dB	1, 2	0		0	
$Qoffset_{s,n}$	dB	1, 2	0		0	
Cell_selection_and_reselection_quality_measurement		1, 2	SS-RSRP		SS-RSRP	
AoA setup		1, 2	Setup 1 defined in A.3.15.1		Setup 1 defined in A.3.15.1	
Beam assumption[Note 4]		1,2	Rough		Rough	
$\hat{E}_s/I_{ot\ \mathrm{BB}}$ [Note 5]	dB	1	-3.55	0.95	0.95	-3.55
		2				
N_{oc} [Note2]	dBm/SCS	1	-93			
		2	-90			
N_{oc} [Note2]	dBm/15 kHz	1	-102			
		2				
$\hat{E}_s / N_{oc}$	dB	1	-3	1.5	1.5	-3
		2				
SS-RSRP [Note3]	dBm/SCS	1	-96	-91.5	-91.5	-96
		2	-93	-88.5	-88.5	-93
Io on SSB symbols of each cell	dBm/95.04 MHz	1	-67.40	-65.34	-65.34	-67.40
		2	-64.40	-62.34	-62.34	-64.40
Treselection	s	1, 2	0	0	0	0
$S_{SearchThresholdP}$		1, 2	35	35	35	35
SintrasearchP	dB	1, 2	50		50	
Propagation Condition		1, 2	AWGN			

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 5:	Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

A.7.1.1.4.3 Test Requirements

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on Cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 1.

The cell re-selection delay to an already detected cell shall be less than 79 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to an already detected cell can be expressed as: $T_{evaluate, NR_Intra} + T_{SI-NR}$,

Where:

$T_{evaluate, NR_Intra}$ See Table 4.2.2.9.3-1 in clause 4.2.2.9,

T_{SI-NR} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 78.08 s, allow 79s for the cell re-selection delay to an already detected cell for UE fulfilling not-at-cell edge criterion in the test case.

A.7.1.1.5 Cell reselection to FR2 inter-frequency NR case for UE fulfilling low mobility relaxed measurement criterion

A.7.1.1.5.1 Test Purpose and Environment

This test is to verify the requirement for the inter frequency NR cell reselection requirements for UE fulfilling low mobility criterion specified in clause 4.2.2.10.2.

A.7.1.1.5.2 Test Parameters

The test scenario comprises of 2 cells (Cell 1 and Cell 2) on 2 different NR carriers respectively as given in tables A.7.1.1.5.2-1, A.7.1.1.5.2-2 and A.7.1.1.5.2-3. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and Cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing Cell 2. Cell 2 is of higher priority than Cell 1. The UE is configured with l*owMobilityEvalutation* criterion [2].

Table A.7.1.1.5.2-1: Supported test configurations

Configuration	Description for serving cell	Description for target cell
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Note: The UE is only required to be tested in one of the supported test configurations.

Table A.7.1.1.5.2-2: General test parameters for FR2 inter frequency NR cell re-selection test case for UE fulfilling low mobility criterion

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell2	The UE camps on cell2 and fulfils low mobility (*lowMobilityEvalutation* [2]) criterion.
	Neighbour cell		1, 2	Cell1	
T1 final condition	Active cell		1, 2	Cell1	The UE reselects to low priority cell1 during T1
	Neighbour cell		1, 2	Cell2	
T2 final condition	Active cell		1, 2	Cell2	The UE reselects to high priority cell2 during T2
	Neighbour cell			Cell1	
RF Channel Number			1, 2	1, 2	
Time offset between cells			1, 2	3 µs	Synchronous cells
Access Barring Information		-	1, 2	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR2	
			2	SSB.2 FR2	
SMTC configuration			1, 2	SMTC pattern 1	
DRX cycle length		s	1, 2	0.64	The value shall be used for all cells in the test.
PRACH configuration index			1, 2	190	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2	Not configured	
T1		s	1, 2	85	T1 needs to be long enough to allow cell re-selection to already known cell1
T2		s	1, 2	85	T2 needs to be long enough to allow cell re-selection to already known cell2

Table A.7.1.1.5.2-3: Cell specific test parameters for FR2 inter frequency NR cell re-selection test case in AWGN for UE fulfilling low mobility criterion

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2	TDDConf.3.1		TDDConf.3.1	
PDSCH RMC configuration		1, 2	SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET parameters		1, 2	CR.3.1 TDD		CR.3.1 TDD	
RMSI CORESET RMC configuration		1, 2	CCR.3.1 TDD		CCR.3.1 TDD	
OCNG Pattern		1, 2	OP.1 defined in A.3.2.1		OP.1 defined in A.3.2.1	
$BW_{channel}$	MHz	1, 2	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		1, 2	66		66	
Initial DL BWP configuration		1, 2	DLBWP.0.1		DLBWP.0.1	

Initial UL BWP configuration		1, 2	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1, 2	SSB		SSB	
Qrxlevmin	dBm/SCS	1	-140		-140	
		2	-137		-137	
Pcompensation	dB	1, 2	0		0	
$Qhyst_s$	dB	1, 2	0		0	
$Qoffset_{s,n}$	dB	1, 2	0		0	
Cell_selection_and_reselection_quality_measurement		1, 2	SS-RSRP		SS-RSRP	
AoA setup		1, 2	Setup 1 defined in A.3.15.1		Setup 1 defined in A.3.15.1	
Beam assumption[Note 4]		1, 2	Rough		Rough	
$\hat{E}_s/I_{ot}$ BB [Note 5]	dB	1, 2	9.95	7.45	-11.05	7.95
N_{oc} [Note2]	dBm/SCS	1	-93		-93	
		2	-90		-90	
N_{oc} [Note2]	dBm/15 kHz	1, 2	-102		-102	
$\hat{E}_s/N_{oc}$	dB	1, 2	10.5	8	-10.5	8.5
SS-RSRP [Note3]	dBm/SCS	1	-82.5	-85	-103.5	-84.5
		2	-79.5	-82	-100.5	-81.5
Io	dBm/95.04 MHz	1,2	-53.14	-55.37	-63.64	-54.94
TreselectionNR	s	1, 2	0		0	
SnonintrasearchP	dB	1, 2	50		Not sent	
$S_{SearchDeltaP}$	dB	1, 2	6		6	
$T_{SearchDeltaP}$	s	1, 2	5		5	
$Thresh_{x, highP}$	dB	1, 2	48		48	
$Thresh_{serving, lowP}$	dB	1, 2	44		44	
$Thresh_{x, lowP}$	dB	1, 2	50		50	
Propagation Condition		1, 2	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Note 5: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

A.7.1.1.5.3 Test Requirements

The cell reselection delay to an already detected low priority cell (Cell 1) for UE fulfilling low mobility criterion is defined as the time from the beginning of time period T1, to the moment when the UE camps on Cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 1.

The cell re-selection delay to an already detected low priority cell, Cell 1, shall be less than 79 s.

The cell reselection delay to an already detected high priority cell (Cell 2) for UE fulfilling low mobility criterion is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to

send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 2.

The cell re-selection delay to an already detected high priority cell, Cell 2, shall be less than 79 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE 1: The cell re-selection delay to an already detected low priority cell can be expressed as: $T_{evaluate, NR_ inter} + T_{SI-NR}$

NOTE 2: The cell re-selection delay to an already detected higher priority cell can be expressed as: $T_{evaluate, NR_ inter} + T_{SI-NR}$

Where:

$T_{evaluate, NR_ inter}$ See Table 4.2.2.10.2-1 in clause 4.2.2.10.2

T_{SI-NR} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 78.08 s, allow 79 s for the cell re-selection delay to an already detected low priority cell for UE fulfilling low mobility criterion in the test case.

This gives a total of 78.08 s, allow 79 s for the cell re-selection delay to an already detected high priority cell for UE fulfilling low mobility criterion in the test case.

A.7.1.1.6 Cell reselection to FR2 inter-frequency NR case for UE fulfilling not-at-cell edge relaxed measurement criterion

A.7.1.1.6.1 Test Purpose and Environment

This test is to verify the requirement for the inter frequency NR cell reselection requirements for UE fulfilling not-at-cell edge criterion specified in clause 4.2.2.10.3.

A.7.1.1.6.2 Test Parameters

The test scenario comprises of 2 cells (Cell 1 and Cell 2) on 2 different NR carriers respectively as given in tables A.7.1.1.6.2-1, A.7.1.1.6.2-2 and A.7.1.1.6.2-3. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and Cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing Cell 2. Cell 2 is of higher priority than Cell 1. The UE is configured with *cellEdgeEvaluation* criterion [2].

Table A.7.1.1.6.2-1: Supported test configurations

Configuration	Description for serving cell	Description for target cell
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.7.1.1.6.2-2: General test parameters for FR2 inter frequency NR cell re-selection test case for UE fulfilling not-at-cell edge criterion

Parameter	Unit	Test configuration	Value	Comment

Initial condition	Active cell		1, 2	Cell2	The UE camps on cell2 and fulfils not-at-cell edge (*cellEdgeEvaluation* [2]) criterion.
	Neighbour cell		1, 2	Cell1	
T1 final condition	Active cell		1, 2	Cell1	The UE reselects to low priority cell1 during T1
	Neighbour cell		1, 2	Cell2	
T2 final condition	Active cell		1, 2	Cell2	The UE reselects to high priority cell2 during T2
	Neighbour cell		1, 2	Cell1	
RF Channel Number			1, 2	1, 2	
Time offset between cells			1, 2	3 μs	Synchronous cells
Access Barring Information		-	1, 2	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR2	
			2	SSB.2 FR2	
SMTC configuration			1, 2	SMTC pattern 1	
DRX cycle length		s	1, 2	0.64	The value shall be used for all cells in the test.
PRACH configuration index			1, 2	190	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2	Not configured	
T1		s	1, 2	85	T1 needs to be long enough to allow cell re-selection to already known cell.
T2		s	1, 2	85	T2 needs to be long enough to allow cell re-selection to already known cell.

Table A.7.1.1.6.2-3: Cell specific test parameters for FR2 inter frequency NR cell re-selection test case in AWGN for UE fulfilling not-at-cell edge criterion

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2	TDDConf.3.1		TDDConf.3.1	
PDSCH RMC configuration		1, 2	SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET parameters		1, 2	CR.3.1 TDD		CR.3.1 TDD	
RMSI CORESET RMC configuration		1, 2	CCR.3.1 TDD		CCR.3.1 TDD	
OCNG Pattern		1, 2	OP.1 defined in A.3.2.1		OP.1 defined in A.3.2.1	
$BW_{channel}$	MHz	1, 2	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		1, 2	66		66	
Initial DL BWP configuration		1, 2	DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		1, 2	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1, 2	SSB		SSB	
Qrxlevmin	dBm/SCS	1	-140		-140	
		2	-137		-137	
Pcompensation	dB	1, 2	0		0	
$Qhyst_s$	dB	1, 2	0		0	
$Qoffset_{s,n}$	dB	1, 2	0		0	
Cell_selection_and_reselection_quality_measurement		1, 2	SS-RSRP		SS-RSRP	

AoA setup		1, 2	Setup 1 defined in A.3.15.1		Setup 1 defined in A.3.15.1	
Beam assumption[Note 4]		1, 2	Rough		Rough	
$\hat{E}_s/I_{ot}$ BB [Note 5]	dB	1, 2	9.95	7.45	-11.05	7.95
N_{oc} [Note2]	dBm/SCS	1	-93		-93	
		2	-90		-90	
N_{oc} [Note2]	dBm/15 kHz	1, 2	-102		-102	
$\hat{E}_s/N_{oc}$	dB	1, 2	10.5	8	-10.5	8.5
SS-RSRP [Note3]	dBm/SCS	1	-82.5	-85	-103.5	-84.5
		2	-79.5	-82	-100.5	-81.5
Io	dBm/95.04 MHz	1,2	-53.14	-55.37	-63.64	-54.94
$S_{SearchThresholdP}$		1, 2	35	35	29	29
TreselectionNR	s	1, 2	0		0	
SnonintrasearchP	dB	1, 2	50		Not sent	
$Thresh_{X, highP}$	dB	1, 2	48		48	
$Thresh_{serving, lowP}$	dB	1, 2	44		44	
$Thresh_{X, lowP}$	dB	1, 2	50		50	
Propagation Condition		1, 2	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Note 5: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

A.7.1.1.6.3 Test Requirements

The cell reselection delay to an already detected low priority cell (Cell 1) for UE fulfilling not-at-cell edge criterion is defined as the time from the beginning of time period T1, to the moment when the UE camps on Cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 1.

The cell re-selection delay to an already detected low priority cell, Cell 1, shall be less than 79 s.

The cell reselection delay to an already detected high priority cell (Cell 2) for UE fulfilling not-at-cell edge criterion is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 2.

The cell re-selection delay to an already detected high priority cell, Cell 2, shall be less than 79 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE 1: The cell re-selection delay to an already detected low priority cell can be expressed as: $T_{evaluate, NR_ inter} + T_{SI-NR}$

NOTE 2: The cell re-selection delay to an already detected higher priority cell can be expressed as: $T_{evaluate, NR_ inter} + T_{SI-NR}$

Where:

$T_{evaluate, NR_ inter}$ See Table 4.2.2.10.3-1 in clause 4.2.2.10.3

T_{SI-NR} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280ms is assumed in this test case.

This gives a total of 78.8 s, allow 79 s for the cell re-selection delay to an already detected low priority cell for UE fulfilling not-at-cell edge criterion in the test case.

This gives a total of 78.08 s, allow 79 s for the cell re-selection delay to an already detected high priority cell for UE fulfilling not-at-cell edge criterion in the test case.

A.7.1.1.7 Cell reselection to FR2 intra-frequency NR case for FR2 power class 6 UE configured with *highSpeedMeasFlagFR2-r17*

A.7.1.1.7.1 Test Purpose and Environment

This test is to verify the requirement for the intra frequency NR cell reselection requirements specified in clause 4.2.2.3 for FR2 power class 6 UE configured with *highSpeedMeasFlagFR2-r17*.

A.7.1.1.7.2 Test Parameters

The test scenario comprises of 1 NR carrier and 2 cells as given in tables A.7.1.1.7.2-1, A.7.1.1.7.2-2 and A.7.1.1.7.2-3. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Only cell 1 is already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2.

Table A.7.1.1.7.2-1: Supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.7.1.1.7.2-2: General test parameters for intra frequency NR cell re-selection test case

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell1	
T2 end condition	Active cell		1, 2	Cell2	
	Neighbour cell		1, 2	Cell1	
Final condition	Active cell		1, 2	Cell1	
	Neighbour cell		1, 2	Cell2	
RF Channel Number			1, 2	1	
Time offset between cells			1, 2	3 μs	Synchronous cells
Access Barring Information		-	1, 2	Not Sent	No additional delays in random access procedure.
SMTC configuration			1, 2	SMTC.1	
DRX cycle length		s	1, 2	0.32	The value shall be used for all cells in the test.
PRACH configuration index			1, 2	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2

rangeToBestCell		1, 2	Not configured	
highSpeedMeasFlagFR2-r17			Set 1	
T1	s	1, 2	>7	During T1, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed, The intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T2
T2	s	1, 2	10	T2 needs to be defined so that cell re-selection reaction time is taken into account.
T3	s	1, 2	5	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.7.1.1.7.2-3: Cell specific test parameters for intra frequency NR cell re-selection test case in AWGN

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1, 2	TDDConf.3.1			TDDConf.3.1		
PDSCH RMC configuration		1	SR.3.1 TDD			SR.3.1 TDD		
		2	SR.3.1 TDD			SR.3.1 TDD		
RMSI CORESET RMC configuration		1	CR.3.1 TDD			CR.3.1 TDD		
		2	CR.3.1 TDD			CR.3.1 TDD		
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD			CCR.3.1 TDD		
		2	CCR.3.1 TDD			CCR.3.1 TDD		
SSB configuration		1	SSB.3 FR2			SSB.7 FR2		
		2	SSB.4 FR2			SSB.8 FR2		
OCNG Pattern		1, 2	OP.4			OP.4		
$BW_{channel}$	MHz	1, 2	100: $N_{RB,c}$ = 66			100: $N_{RB,c}$ = 66		
Data RBs allocated		1, 2	66			66		
Initial DL BWP configuration		1, 2	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2	SSB			SSB		
Qrxlevmin	dBm/SCS	1	-138			-138		
		2	-135			-135		
Pcompensation	dB	1, 2	0			0		
$Qhyst_s$	dB	1, 2	0			0		
$Qoffset_{s,n}$	dB	1, 2	0			0		
Cell_selection_and_reselection_quality_measurement		1, 2	SS-RSRP			SS-RSRP		
AoA setup		1, 2	Setup 1 defined in A.3.15.1			Setup 1 defined in A.3.15.1		
$\hat{E}_s/I_{ot}$	dB	1	8	-3	1.5	-infinity	1.5	-3
		2						
Beam assumption[Note 4]		1,2	Rough					
N_{oc} [Note2]	dBm/SCS	1	-93					

		2	-90					
N_{oc} Note2	dBm/15 kHz	1	-102					
		2						
$\hat{E}_s / N_{oc}$	dB	1	8	-3	1.5	-infinity	1.5	-3
		2						
SS-RSRP Note3	dBm/SCS	1	-85	-96	-91.5	-infinity	-91.5	-96
		2	-82	-93	-88.5	-infinity	-88.5	-93
Io on SSB symbols of each cell	dBm/95.04 MHz	1	-59.37	-63.40	-62.47	-64.01	-62.47	-63.40
		2	-57.18	-62.86	-61.67	-64.01	-61.67	-62.86
Treselection	s	1, 2	0	0	0	0	0	0
SintrasearchP	dB	1, 2	50			50		
Propagation Condition		1,2	AWGN			AWGN 19444Hz;		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.1.1.7.3 Test Requirements

The cell reselection delay to a newly detectable cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration updateon Cell 2.

The cell re-selection delay to a newly detectable cell shall be less than 7 s.

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration updateon cell 1.

The cell re-selection delay to an already detected cell shall be less than 4 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a newly detectable cell can be expressed as: $T_{detect, NR_Intra} + T_{SI-NR}$, and to an already detected cell can be expressed as: $T_{evaluate, NR_intra} + T_{SI-NR}$,

Where:

T_{detect, NR_Intra} See Table 4.2.2.3-3 in clause 4.2.2.3

$T_{evaluate, NR_intra}$ See Table 4.2.2.3-3 in clause 4.2.2.3

T_{SI-NR} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 6.4 s, allow 7 s for the cell re-selection delay to a newly detectable cell and 3.2 s for the cell re-selection delay to an already detected cell in the test case, which we allow 4 s.

A.7.2 SA: RRC_INACTIVE state mobility

A.7.2.1 Small Data Transmission

A.7.2.1.1 TA validation for CG-SDT in FR2

A.7.2.1.1.1 Test Purpose and Environment

The purpose of this test is to partly verify that the UE properly perform TA validation for CG-SDT transmission in clause 5.5.3. In the test, UE is configured two CG-SDT configurations when entering/during RRC Inactive state. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 repectively. There is one cell, which is the active NR cell in FR1. Figure A.7.2.1.1.1-1 shows the variation of the RSRP over the duration of the entire test, both sub-tests included.

Prior to the time point TA, the UE shall be fully synchronized to PCell (Cell 1), be registered to the cell and have entered RRC connected mode.

Before starting the test at time point TA, test equipment configures RSRP to P0. At time point TB, RSRP is changed from P0 to P1.

At time point TC which is W1[+Y] after time point TB, UE expect to receive RRC release with CG SDT configuration and RRC status is changed to INACTIVE status.

At time point TD, RSRP is changed from P1 to P0.

At time point TE, RSRP is changed from P0 to P2. TE must be W2 before TF.

Test equipment triggers UL data arrival at UE lower layer at time point TF. After time point TF, test equipment observes whether UE transmits with CG-SDT within 640ms + Z after TF.

At time point TH, UE expect to receive a RRC release with CG-SDT configurations.

At time point TI, RSRP is changed from P2 to P3. TI is TH+W1, and delay between TG and TH is FFS.

Test equipment triggers the UL data arrival at UE lower layer at time point TJ.

Supported test configurations are shown in table A.7.2.1.1.1-1. The test parameters are given in Tables A.7.2.1.1.1-2 and A.7.2.1.1.1-3.

Table A.7.2.1.1.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	TDD, SSB SCS 120 KHz, data SCS 120KHz, BW 100 MHz

Table A.7.2.1.1.1-2: General test parameters for TA validation for CG-SDT in FR2

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		TDD
$BW_{channel}$	Config 1	MHz	100: $N_{RB,c}$ = 66

DL initial BWP configuration	Config 1		DLBWP.0.1
UL initial BWP configuration	Config 1		ULBWP.0.1
TDD Configuration	Config 1		TDDConf.3.1
RMSI CORESET Reference Channel	Config 1		CR.3.1 DD
SSB Configuration	Config 1		SSB.1 FR2
SMTC Configuration	Config 1		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1		120 kHz
PRACH Configuration	Config 1		Table A.3.8.3.4
OCNG parameters			OP.5
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
DRX		s	1.28
cg-SDT-RSRP-ThresholdSSB		dBm	-110
cg-SDT-RSRP-ChangeThreshold		dB	[8]
cg-SDT-TimeAlignmentTime			infinity
CG-SDT resource period		ms	40
T1		s	[TBD]
T2		s	[TBD]
T3		s	[TBD]
T4		s	[TBD]
T5		s	[TBD]

Table A.7.2.1.1.1-3: Cell specific test parameters TA validation for CG-SDT in FR2

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
AoA setup			Setup 1 defined in A.3.15				
Assumption for UE beams Note 4			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	4				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0				
EPRE ratio of PBCH DMRS to SSS		dB	0				
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
N_{oc}	Config 1	dBm/15kHz	-100				
N_{oc}	Config 1	dBm/SCS	-100				
$\hat{E}_s / I_{ot}$	Config 1	dB	[0]	[13]	[0]	[24.5]	[0]
$\hat{E}_s / N_{oc}$	Config 1	dB	[0]	[13]	[0]	[24.5]	[0]
SS-RSRP	Config 1	dBm/SCS	[-100]	[-87]	[-100]	[-75.5]	[-100]
Io	Config 1	dBm/95.04 MHz	[-68]	[-57.8]	[-68]	[-46.50]	[-68]
Propagation condition			AWGN				

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.

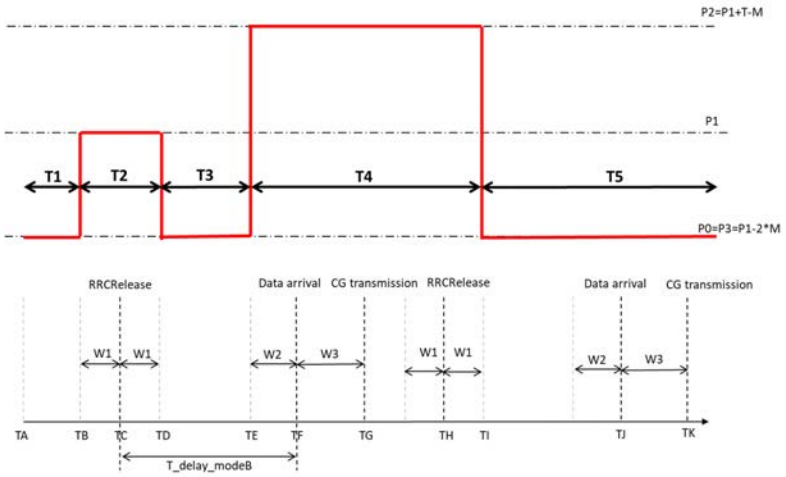

Figure A.7.2.1.1.1-1: RSRP variation for TA validation for CG-SDT

A.7.2.1.1.2 Test Requirements

The UE behaviour in each test during time durations shall be as follows:

During T4, UE shall transmit UL data with CG-SDT within 640ms + Z after time point TF.

During T5, UE shall not transmit UL data with CG-SDT.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.3 RRC_CONNECTED state mobility

A.7.3.1 Handover

A.7.3.1.1 Inter-frequency handover from FR1 to FR2; unknown target cell

A.7.3.1.1.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR1-NR FR2 inter frequency handover requirements specified in clause 6.1.1.5.

A.7.3.1.1.2 Test Parameters

Supported test configurations are shown in table A.7.3.1.2.2-1. Both handover delay and interruption length are tested by using the parameters in table A.7.3.1.1.2-2, and A.7.3.1.1.2-3.

The test scenario comprises of two carriers and one cell on each carrier. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE receives a RRC handover command from the network. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

Table A.7.3.1.1.2-1: Inter-frequency handover from FR1 to FR2 test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.7.3.1.1.2-2: General test parameters Inter-frequency handover from FR1 to FR2

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	≤10	

Table A.7.3.1.1.2-3: Cell specific test parameters for NR FR1-FR2 Inter frequency handover test case

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
Assumption for UE beams[Note 6]			N/A		Rough	
AoA setup			NA		Setup 1 as defined in A.3.15	
NR RF Channel Number			1		2	
Duplex mode	Config 1		FDD		TDD	
	Config 2,3		TDD		TDD	
TDD configuration	Config 1		Not Applicable		TDDConf.3.1	
	Config 2		TDDConf.1.1		TDDConf.3.1	
	Config 3		TDDConf.2.1		TDDConf.3.1	
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
	Config 2		10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
	Config 3		40: $N_{RB,c}$ = 106		100: $N_{RB,c}$ = 66	
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
	Config 2		10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
	Config 3		40: $N_{RB,c}$ = 106		100: $N_{RB,c}$ = 66	
Data RBs allocated	Config 1		52		66	
	Config 2		52		66	
	Config 3		106		66	
DRx Cycle		ms	Not Applicable			

PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	SR3.1 TDD	
	Config 2		SR.1.1 TDD	SR3.1 TDD	
	Config 3		SR2.1 TDD	SR3.1 TDD	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	CR3.1 TDD	
	Config 2		CR.1.1 TDD	CR3.1 TDD	
	Config 3		CR2.1 TDD	CR3.1 TDD	
Control Channel RMC	Config 1		CCR.1.1 FDD	CCR.3.1 TDD	
	Config 2		CCR.1.1 TDD	CCR.3.1 TDD	
	Config 3		CCR.2.1 TDD	CCR.3.1 TDD	
OCNG Patterns			OP 1		
SSB configuration	Config 1,2		SSB.1 FR1	SSB. 3 FR2	
	Config 3		SSB.2 FR1	SSB. 3 FR2	
SMTC configuration	Config 1,2		SMTC.1	SMTC.1	
	Config 3		SMTC.2	SMTC.1	
SMTC configuration	Config 1,2		SMTC.1	SMTC.1	
	Config 3		SMTC.2	SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz	120 kHz	
	Config 3		30 kHz	120 kHz	
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15 kHz	120 kHz	
	Config 3		30 kHz	120 kHz	
PRACH configuration			FR1 PRACH configuration 1	FR2 PRACH configuration 1	
TRS configuration	Config 1		TRS.1.1 FDD	TRS.2.1 TDD	
	Config 2		TRS.1.1 TDD	TRS.2.1 TDD	
	Config 3		TRS.1.2 TDD	TRS.2.1 TDD	
PDSCH/PDCCH TCI state			N/A	TCI.State.2	
BWP configuraiton	Initial DL BWP		DLBWP.0.1	DLBWP.0.1	
	Dedicated DL BWP		DLBWP.1.1	DLBWP.1.1	
	Initial UL BWP		ULBWP.0.1	ULBWP.0.1	
	Dedicated UL BWP		ULBWP.1.1	ULBWP.1.1	
EPRE ratio of PSS to SSS		dB	0	0	
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} Note2		dBm/15kHz	Link only, see clause A.3.7A	-104.7	
N_{oc} Note2	Config 1,2	dBm/SCS		-95.7	
	Config 3			-95.7	
$\hat{E}_s / I_{ot}$		dB		-Infinity	10
$\hat{E}_s / N_{oc}$		dB		-Infinity	10
Io Note3	Config 1,2	dBm/BW		-66.7	-56.3
	Config 3	dBm/BW		-66.7	-56.3
Propagation condition		-		AWGN	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5:	As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 6:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.3.1.1.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 572 ms from the beginning of time period T2.
The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = [10] ms and is specified in clause 12 in TS 38.331 [2].

$T_{interrupt}$ = 562 ms in the test. $T_{interrupt}$ is defined in clause 6.1.1.5.2.

This gives a total of 572 ms.

A.7.3.1.2 Intra-frequency handover from FR2 to FR2; unknown target cell

A.7.3.1.2.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR2-NR FR2 intra frequency handover requirements specified in clause 6.1.1.4.

A.7.3.1.2.2 Test Parameters

Supported test configurations are shown in table A.7.3.1.2.2-1. Both handover delay and interruption length are tested by using the parameters in table A.7.3.1.2.2-2, and A.7.3.1.2.2-3.

The test scenario comprises of carriers and one cell on each carrier. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE receives a RRC handover command from the network. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

Table A.7.3.1.2.2-1: Intra-frequency handover from FR2 to FR2 test configurations

Config	Description
1	Source cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.3.1.2.2-2: General test parameters Intra-frequency handover from FR2 to FR2

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 µs	Synchronous cells
T1		s	5	

T2	s	≤10	

Table A.7.3.1.2.2-3: Cell specific test parameters for NR FR2-FR2 Intra frequency handover test case

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
Assumption for UE beams[Note 6]			Rough		Rough	
AoA setup			Setup 1 as defined in A.3.15			
NR RF Channel Number			1		1	
Duplex mode			TDD			
TDD configuration			TDDConf.3.1			
$BW_{channel}$		MHz	100: $N_{RB,c}$ = 66			
BWP BW		MHz	100: $N_{RB,c}$ = 66			
Data RBs allocated			66			
DRx Cycle		ms	Not Applicable			
PDSCH Reference measurement channel			SR3.1 TDD			
RMSI CORESET Reference Channel			CR3.1 TDD			
Control Channel RMC			CCR.3.1 TDD			
OCNG Patterns			O P. 1			
SMTC Configuration			SMTC pattern 1			
SSB Configuration			SSB. 3 FR2			
PDSCH/PDCCH subcarrier spacing		kHz	120 kHz			
PUCCH/PUSCH subcarrier spacing		kHz	120 kHz			
PRACH configuration			FR2 PRACH configuration 1			
TRS configuration			TRS.2.1 TDD			
PDSCH/PDCCH TCI state			TCI.State.2			
BWP configuraiton	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} [Note2]		dBm/15kHz	-104.7			
N_{oc} [Note2]		dBm/SCS	-95.7			
$\hat{E}_s / I_{ot}$		dB	6	-1.8	-Infinity	0
$\hat{E}_s / N_{oc}$		dB	6	6	-Infinity	7
Io[Note3]		dBm/BW	-59.7	-56.7	-59.7	-56.7
Propagation condition		-	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone

Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.3.1.2.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 232 ms from the beginning of time period T2.
The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2].

$T_{interrupt}$ = 222 ms in the test. $T_{interrupt}$ is defined in clause 6.1.1.4.2.

This gives a total of 232 ms.

A.7.3.1.3 Inter-frequency handover from FR2 to FR2; unknown target cell

A.7.3.1.3.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR2-NR FR2 inter frequency handover requirements specified in clause 6.1.1.4.

A.7.3.1.3.2 Test Parameters

Supported test configurations are shown in table A.7.3.1.3.2-1. Both handover delay and interruption length are tested by using the parameters in table A.7.3.1.3.2-2, and A.7.3.1.3.2-3.

The test scenario comprises of carriers and one cell on each carrier. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE receives a RRC handover command from the network. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

Table A.7.3.1.3.2-1: Inter-frequency handover from FR2 to FR2 test configurations

Config	Description
1	Source cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.3.1.3.2-2: General test parameters Inter-frequency handover from FR2 to FR2

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	≤10	

Table A.7.3.1.3.2-3: Cell specific test parameters for NR FR2-FR2 Inter frequency handover test case

Parameter	Unit	Cell 1	Cell 2

			T1	T2	T1	T2
Assumption for UE beams[Note 6]			Rough		Rough	
AoA setup			Setup 1as defined in A.3.15			
NR RF Channel Number			1		2	
Duplex mode			TDD			
TDD configuration			TDDConf.3.1			
$BW_{channel}$		MHz	100: $N_{RB,c}$ = 66			
BWP BW		MHz	100: $N_{RB,c}$ = 66			
Data RBs allocated			66			
DRx Cycle		ms	Not Applicable			
PDSCH Reference measurement channel			SR3.1 TDD			
RMSI CORESET Reference Channel			CR3.1 TDD			
Control Channel RMC			CCR.3.1 TDD			
OCNG Patterns			O P. 1			
SMTC Configuration			SMTC pattern 1			
SSB Configuration			SSB. 3 FR2			
PDSCH/PDCCH subcarrier spacing		kHz	120 kHz			
PUCCH/PUSCH subcarrier spacing		kHz	120 kHz			
PRACH configuration			FR2 PRACH configuration 1			
TRS configuration			TRS.2.1 TDD			
PDSCH/PDCCH TCI state			TCI.State.2			
BWP configuraiton	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-104.7		-104.7	
N_{oc} Note2		dBm/SCS	-95.7		-95.7	
$\hat{E}_s / I_{ot}$		dB	5	5	-Infinity	5
$\hat{E}_s / N_{oc}$		dB	5	5	-Infinity	5
Io[Note3]	Config 1,2	dBm/BW	-60.5	-60.5	-66.7	-60.5
Propagation condition		-	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone

Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone

Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.3.1.3.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 552 ms from the beginning of time period T2.
The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2].

$T_{interrupt}$ = 542 ms in the test. $T_{interrupt}$ is defined in clause 6.1.1.4.2.

This gives a total of 552 ms.

A.7.3.1.4 Inter-band inter-frequency synchronous DAPS handover from FR1 to FR2

A.7.3.1.4.1 Test Purpose and Environment

This test is to verify the requirement for the FR1-to-FR2 Inter-band inter-frequency synchronous DAPS handover requirements specified in clause 6.1.3.4.

A.7.3.1.4.2 Test Parameters

Supported test configurations are shown in table A.7.3.1.4.2-1. Both handover delay and interruption length are tested by using the parameters in table A.7.3.1.4.2-2, A.7.3.1.4.2-3 and A.7.3.1.4.2-4.

The test scenario comprises of two bands each with one cell. The test consists of five successive time periods, with time durations of T1, T2, T3, T4 and T5 respectively.

Before the start of T1, the UE is connected to Cell 1 (source PCell) on radio channel 1 but is not aware of Cell 2 (neighbour cell) on radio channel 2. The UE shall be configured with periodic CSI reporting for cell1. During T1, the UE shall not have any timing information of Cell 2.

Before the start of T2, the UE in the measurement control information that event-triggered reporting with Event A4 is configured for neighbour cell (Cell 2), and the UE is configured with the measurement gaps (gap pattern ID # 0). Starting T2, Cell 2 becomes known to the UE. During T2, the UE shall report Event A4. After receiving the Event A4, the test system shall send a RRC message implying DAPS handover to the UE.

The start of T3 is the instant when the test system receives the ACK of the PDSCH corresponding to the last TTI containing the RRC message implying DAPS handover to Cell 2 (target PCell) sent to the UE. During T3, the UE shall be able to perform random access to Cell 2. DL schedule and UL feedback to cell 1 shall be avoided when UE is required to perform DL reception or UL transmission in PRACH procedure in cell 2, except preamble transmission. After the RACH procedure is completed, the test system shall send a RRC message to the UE to release Cell 1 (source cell) on radio channel 1.

The start of T4 is the instant when the test system receives the ACK of the PDSCH corresponding to the last TTI containing the RRC message implying source cell release sent to the UE. During T4, the UE shall perform source cell release.

Starting T5, the UE shall stop sending CSI report to the source cell.

Table A.7.3.1.4.2-1: Inter-band inter-frequency synchronous DAPS handover from FR1 to FR2 test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

	Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.7.3.1.4.2-2: General test parameters for Inter-band inter-frequency synchronous DAPS handover from FR1 to FR2

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
A4-Threshold		dBm	-120	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells		µs	33	Synchronous cells
T1		s	5	
T2		s	<5	
T3		s	<0.5	
T4		ms	$10+T_{interrupt2}$	$T_{interrupt2}$ as defined in Table 6.1.3.4.2-2 for synchronous DAPS HO
T5		ms	100	

Table A.7.3.1.4.2-3: Cell specific test parameters for Inter-band inter-frequency synchronous DAPS handover from FR1 to FR2 (Cell 1 in FR1)

Parameter		Unit	Cell 1	
			T1	T2 - T5
NR RF Channel Number			1	
Duplex mode	Config 1		FDD	
	Config 2,3		TDD	
TDD configuration	Config 1		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52	
	Config 2		10: $N_{RB,c}$ = 52	
	Config 3		40: $N_{RB,c}$ = 106	
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52	
	Config 2		10: $N_{RB,c}$ = 52	
	Config 3		40: $N_{RB,c}$ = 106	
TRS configuration	Config 1		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
DRx Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	
	Config 2		SR.1.1 TDD	
	Config 3		SR.2.1 TDD	
CORESET Reference Channel	Config 1		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
OCNG Patterns			OP.1	
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD	
	Config 2		CSI-RS.1.1 TDD	
	Config 3		CSI-RS.2.1 TDD	
reportConfigType			periodic	
reportQuantity			cri-RI-PMI-CQI	

CSI reporting periodicity	Config 1,2	slot	5
	Config 3		10
CSI reporting offset	Config 1,2	slot	3
	Config 3		5
SSB Configuration	Config 1,2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTC Configuration	Config 1,2		SMTC.1
	Config 3		SMTC.2
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz
	Config 3		30 kHz
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15 kHz
	Config 3		30 kHz
PRACH configuration			FR1 PRACH configuration 2
BWP	Initial DL BWP		DLBWP.0.1
	Dedicated DL BWP		DLBWP.1.3
	Initial UL BWP		ULBWP.0.1
	Dedicated UL BWP		ULBWP.1.3
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note2		dBm/15kHz	NA Link only, see clause A.3.7A
N_{oc} Note2	Config 1,2	dBm/SCS	
	Config 3		
$\hat{E}_s / I_{ot}$		dB	
$\hat{E}_s / N_{oc}$		dB	
Io Note3	Config 1,2	dBm/ 9.36MHz	
	Config 3	dBm/ 38.16MHz	
Propagation condition		-	AWGN

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.7.3.1.4.2-4: Cell specific test parameters for Inter-band inter-frequency synchronous DAPS handover from FR1 to FR2 (Cell 2 in FR2)

Parameter		Unit	Cell 2	
			T1	T2 - T5
Assumption for UE beams Note 6			Rough	
AoA setup			Setup 1 as defined in A.3.15	
NR RF Channel Number			2	
Duplex mode	Config 1,2,3		TDD	
TDD configuration	Config 1,2,3		TDDConf.3.1	
$BW_{channel}$	Config 1,2,3	MHz	100: $N_{RB,c}$ = 66	
BWP BW	Config 1,2,3	MHz	100: $N_{RB,c}$ = 66	
TRS configuration	Config 1,2,3		TRS.2.1 TDD	

DRX Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1,2,3		SR3.1 TDD	
CORESET Reference Channel	Config 1,2,3		CR3.1 TDD	
OCNG Patterns			OCNG pattern 1	
CSI-RS configuration for CSI reporting	Config 1,2,3		CSI-RS.3.1 TDD	
SSB Configuration	Config 1,2,3		SSB.1 FR2	
SMTC Configuration			SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1,2,3	kHz	120 kHz	
PUCCH/PUSCH subcarrier spacing	Config 1,2,3	kHz	120 kHz	
PRACH configuration			FR2 PRACH configuration 2	
TCI configuration			CSI-RS.Config.0	
BWP	Initial DL BWP		DLBWP.0.1	
	Dedicated DL BWP		DLBWP.1.3	
	Initial UL BWP		ULBWP.0.1	
	Dedicated UL BWP		ULBWP.1.3	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2		dBm/15kHz	-104.7	-104.7
N_{oc} Note2		dBm/SCS	-95.7	-95.7
$\hat{E}_s / I_{ot}$		dB	-Infinity	10
$\hat{E}_s / N_{oc}$		dB	-Infinity	10
Io Note3		dBm/ 95.04MHz	-66.7	-55.4
Propagation condition		-	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone.
Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.

A.7.3.1.4.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 92 ms from the beginning of time period T3. During $D_{handover1}$, the interruption on Cell 1 shall not exceed $T_{interrupt1}$ as defined in Table 6.1.3.4.2-1 for synchronous DAPS HO.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay $D_{handover1}$ can be expressed as: $T_{RRC_procedure} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin}$, where:

$T_{RRC_procedure}$ = 10 ms and is specified in clause 12 in TS 38.331 [2].

T_{IU} = 20 ms in the test. T_{IU} is defined in clause 6.1.1.2.2.

T_{Δ} = 20 ms in the test. T_{Δ} is defined in clause 6.1.1.2.2.

$T_{processing}$ = 40 ms in the test. $T_{processing}$ is defined in clause 6.1.1.2.2.

T_{margin} = 2 ms in the test. T_{margin} is defined in clause 6.1.1.2.2.

This gives a total of 92 ms.

The UE shall complete to release Cell 1 less than (10 ms + $T_{interrupt2}$) from the beginning of time period T4. During $D_{handover2}$, the interruption on Cell 2 shall not exceed $T_{interrupt2}$ as defined in Table 6.1.3.4.2-2 for synchronous DAPS HO.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay $D_{handover2}$ can be expressed as: $T_{RRC_procedure} + T_{interrupt2}$, where:

$T_{RRC_procedure}$ = 10 ms and is specified in clause 12 in TS 38.331 [2].

A.7.3.1.5 Inter-band inter-frequency asynchronous DAPS handover from FR1 to FR2

A.7.3.1.5.1 Test Purpose and Environment

This test is to verify the requirement for the FR1-to-FR2 Inter-band inter-frequency asynchronous DAPS handover requirements specified in clause 6.1.3.4.

A.7.3.1.5.2 Test Parameters

Supported test configurations are shown in table A.7.3.1.5.2-1. Both handover delay and interruption length are tested by using the parameters in table A.7.3.1.5.2-2, A.7.3.1.5.2-3 and A.7.3.1.5.2-4.

The test scenario comprises of two bands each with one cell. The test consists of five successive time periods, with time durations of T1, T2, T3, T4 and T5 respectively.

Before the start of T1, the UE is connected to Cell 1 (source PCell) on radio channel 1 but is not aware of Cell 2 (neighbour cell) on radio channel 2. The UE shall be configured with periodic CSI reporting for cell1. During T1, the UE shall not have any timing information of Cell 2.

Before the start of T2, the UE in the measurement control information that event-triggered reporting with Event A4 is configured for neighbour cell (Cell 2), and the UE is configured with the measurement gaps (gap pattern ID # 0). Starting T2, Cell 2 becomes known to the UE. During T2, the UE shall report Event A4. After receiving the Event A4, the test system shall send a RRC message implying DAPS handover to the UE.

The start of T3 is the instant when the test system receives the ACK of the PDSCH corresponding to the last TTI containing the RRC message implying DAPS handover to Cell 2 (target PCell) sent to the UE. During T3, the UE shall be able to perform random access to Cell 2. DL schedule and UL feedback to cell 1 shall be avoided when UE is required to perform DL reception or UL transmission in PRACH procedure in cell 2, except preamble transmission. After the RACH procedure is completed, the test system shall send a RRC message to the UE to release Cell 1 (source cell) on radio channel 1.

The start of T4 is the instant when the the test system receives the ACK of the PDSCH corresponding to last TTI containing the RRC message implying source cell release sent to the UE. During T4, the UE shall perform source cell release.

Starting T5, the UE shall stop sending CSI report to the source cell.

Table A.7.3.1.5.2-1: Inter-band inter-frequency asynchronous DAPS handover from FR1 to FR2 test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.7.3.1.5.2-2: General test parameters for Inter-band inter-frequency asynchronous DAPS handover from FR1 to FR2

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
A4-Threshold		dBm	-120	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells		µs	62.5	Asynchronous cells
T1		s	5	
T2		s	<5	
T3		s	<0.5	
T4		ms	$10+T_{interrupt2}$	$T_{interrupt2}$ as defined in Table 6.1.3.4.2-2 for asynchronous DAPS HO.
T5		ms	100	

Table A.7.3.1.5.2-3: Cell specific test parameters for Inter-band inter-frequency asynchronous DAPS handover from FR1 to FR2 (Cell 1 in FR1)

Parameter		Unit	Cell 1	
			T1	T2 - T5
NR RF Channel Number			1	
Duplex mode	Config 1		FDD	
	Config 2,3		TDD	
TDD configuration	Config 1		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52	
	Config 2		10: $N_{RB,c}$ = 52	
	Config 3		40: $N_{RB,c}$ = 106	
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52	
	Config 2		10: $N_{RB,c}$ = 52	
	Config 3		40: $N_{RB,c}$ = 106	
TRS configuration	Config 1		TRS.1.1 FDD	

	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
DRx Cycle		ms	Not Applicable
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD
	Config 2		SR.1.1 TDD
	Config 3		SR.2.1 TDD
CORESET Reference Channel	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
OCNG Patterns			OP.1
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity	Config 1,2	slot	5
	Config 3		10
CSI reporting offset	Config 1,2	slot	3
	Config 3		5
SSB Configuration	Config 1,2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTC Configuration	Config 1,2		SMTC.1
	Config 3		SMTC.2
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz
	Config 3		30 kHz
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15 kHz
	Config 3		30 kHz
PRACH configuration			FR1 PRACH configuration 2
BWP	Initial DL BWP		DLBWP.0.1
	Dedicated DL BWP		DLBWP.1.3
	Initial UL BWP		ULBWP.0.1
	Dedicated UL BWP		ULBWP.1.3
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note2		dBm/15kHz	NA Link only, see clause A.3.7A
N_{oc} Note2	Config 1,2	dBm/SCS	
	Config 3		
$\hat{E}_s / I_{ot}$		dB	
$\hat{E}_s / N_{oc}$		dB	
Io Note3	Config 1,2	dBm/ 9.36MHz	
	Config 3	dBm/	

		38.16MHz	
Propagation condition		-	AWGN

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.7.3.1.5.2-4: Cell specific test parameters for Inter-band inter-frequency asynchronous DAPS handover from FR1 to FR2 (Cell 2 in FR2)

Parameter		Unit	Cell 2	
			T1	T2 - T5
Assumption for UE beams[Note 6]			Rough	
AoA setup			Setup 1 as defined in A.3.15	
NR RF Channel Number			2	
Duplex mode	Config 1,2,3		TDD	
TDD configuration	Config 1,2,3		TDDConf.3.1	
$BW_{channel}$	Config 1,2,3	MHz	100: $N_{RB,c}$ = 66	
BWP BW	Config 1,2,3	MHz	100: $N_{RB,c}$ = 66	
TRS configuration	Config 1,2,3		TRS.2.1 TDD	
DRX Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1,2,3		SR.3.1 TDD	
CORESET Reference Channel	Config 1,2,3		CR.3.1 TDD	
OCNG Patterns			OP.1	
CSI-RS configuration for CSI reporting	Config 1,2,3		CSI-RS.3.1 TDD	
SSB Configuration	Config 1,2,3		SSB.1 FR2	
SMTC Configuration			SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1,2,3	kHz	120 kHz	
PUCCH/PUSCH subcarrier spacing	Config 1,2,3	kHz	120 kHz	
PRACH configuration			FR2 PRACH configuration 2	
TCI configuration			CSI-RS.Config.0	
BWP	Initial DL BWP		DLBWP.0.1	
	Dedicated DL BWP		DLBWP.1.3	
	Initial UL BWP		ULBWP.0.1	
	Dedicated UL BWP		ULBWP.1.3	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2		dBm/15kHz	-104.7	-104.7
N_{oc} Note2		dBm/SCS	-95.7	-95.7
$\hat{E}_s / I_{ot}$		dB	-Infinity	10
$\hat{E}_s / N_{oc}$		dB	-Infinity	10

Io[Note3]	dBm/ 95.04MHz	-66.7	-55.4
Propagation condition	-	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone.
Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.

A.7.3.1.5.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 92 ms from the beginning of time period T3. During $D_{handover1}$, the interruption on Cell 1 shall not exceed $T_{interrupt1}$ as defined in Table 6.1.3.4.2-1 for asynchronous DAPS HO.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay $D_{handover1}$ can be expressed as: $T_{RRC_procedure} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin}$, where:

$T_{RRC_procedure}$ = 10 ms and is specified in clause 12 in TS 38.331 [2].

T_{IU} = 20 ms in the test. T_{IU} is defined in clause 6.1.1.2.2.

T_{Δ} = 20 ms in the test. T_{Δ} is defined in clause 6.1.1.2.2.

$T_{processing}$ = 40 ms in the test. $T_{processing}$ is defined in clause 6.1.1.2.2.

T_{margin} = 2 ms in the test. T_{margin} is defined in clause 6.1.1.2.2.

This gives a total of 792 ms.

The UE shall complete to release Cell 1 less than (10 ms + $T_{interrupt2}$) from the beginning of time period T4. During $D_{handover2}$, the interruption on Cell 2 shall not exceed $T_{interrupt2}$ as defined in Table 6.1.3.4.2-2 for asynchronous DAPS HO.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay $D_{handover2}$ can be expressed as: $T_{RRC_procedure} + T_{interrupt2}$, where:

$T_{RRC_procedure}$ = 10 ms and is specified in clause 12 in TS 38.331 [2].

A.7.3.1.6 Handover with PSCell from SA to EN-DC; unknown FR2 target cell

A.7.3.1.6.1 Test Purpose and Environment

This test is to verify the PSCell addition delay requirements specified in clause 6.1.5.2 for handover with PSCell from NR SA to EN-DC with sequential processing when the SMTC of target unknown PSCell is present in RRCConnectionReconfiguration and the target PSCell is in FR2.

A.7.3.1.6.2 Test Parameters

Supported test configurations are shown in table A.7.3.1.6.21. The PSCell addition delay are tested by using the parameters in table A.7.3.1.6.2-2-6.

The test scenario comprises of three carriers and one cell on each carrier. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2 and cell 3. Starting T2, cell 2 and cell 3 become detectable and the UE receives a RRC signalling including handover with PSCell command from the network. The start of T2 is the instant when the last TTI containing the RRC message implying handover with PSCell is sent to the UE.

The test system shall send a RRC message to the UE to trigger HO (Cell 2) with PSCell (Cell 3) during period T2, after UE has reported Event B2. The point in time at which the RRC message implying HO (Cell 2) with PSCell (Cell 3) is received at the UE antenna connector defines the start of period T3. The test system shall observe the UE sends PRACH to the PSCell (Cell 3) during period T3.

Table A.7.3.1.6.2-1: Handover with PSCell from NR SA to EN-DC test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target PCell: LTE FDD Target PSCell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target PCell: LTE TDD Target PSCell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
3	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target PCell: LTE FDD Target PSCell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
4	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target PCell: LTE TDD Target PSCell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.7.3.1.6.2-2: General test parameters for handover with PSCell from NR SA to EN-DC

Parameter		Unit	Value	Comment
RF Channel Number			1, 2, 3	Three radio channels are used for this test. One for FR1 source PCell, second for E-UTRA target PCell and third for target NR PSCell
Initial Condition	Active PCell		Cell1	PCell on RF channel number 1.
	Neighbour cell		Cell2, Cell3	Neighbour cell on RF channel number 2 and 3.
Final Condition	Active PCell		Cell2	E-UTRA PCell on RF channel number 2.
	Active PSCell		Cell3	PSCell on RF channel number 3.
	Neighbour Cell		Cell1	RF channel number 1
NR measurement quantity			SS-RSRP	
E-UTRAN measurement quantity			RSRP	
b2-Threshold1		dBm	As specified in Table A.6.3.1.4-3	Absolute NR SS-RSRP threshold for event B2
b2-Threshold2EUTRAN		dBm	-98	Absolute E-UTRAN RSRP threshold for event B2
Hysteresis		dB	0	
TimeToTrigger		s	0	
Filter coefficient			0	L3 filtering is not used
DRX			OFF	Non-DRX test
Access Barring Information		-	Not sent	No additional delays in random access procedure

PRACH configuration on cell3		FR2 configuration 2	Captured in A.3.8.3.2
Time offset between cell 1 and 2		3 ms	Asynchronous cells
Gap pattern configuration Id		0	As specified in Table 9.1.2-1 started before T2 starts
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on primary component carrier.
Cell-individual offset for cells on RF channel number 3	dB	0	Individual offset for cells on carrier frequency of cell3.
T1	s	5	
T2	s	≤5	During this time the cell 2 and cell 3 shall be known.
T3	s	1	During this time the UE perform HO with PSCell addition.

Table A.7.3.1.6.2-3: Cell specific test parameters for Cell 1

Parameter		Unit	Configuration	Cell 1		
				T1	T2	T3
RF channel number			1, 2	1		
Duplex mode			1, 2	FDD		
$BW_{channel}$		MHz	1, 2	10: $N_{RB,c}$ = 52 (FDD)		
PDSCH reference measurement channel			1, 2	SR.1.1 FDD		
CORSET reference channel			1, 2	CR.1.1 FDD		
TRS configuration			1, 2	TRS.1.1 FDD		
OCNG pattern[Note1]			1, 2	OP.1		
BWP	Initial DL BWP		1, 2	DLBWP.0.1		
	Dedicated DL BWP			DLBWP.1.1		
	Initial UL BWP			ULBWP.0.1		
	Dedicated UL BWP			ULBWP.1.1		
SMTC configuration			1, 2	SMTC.1		
SSB configuration			1, 2	SSB.1 FR1		
b2-Threshold1		dBm	1, 2	-96		
EPRE ratio of PSS to SSS		dB	1, 2	0		
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						
EPRE ratio of PDCCH to PDCCH_DMRS						
EPRE ratio of PDSCH_DMRS to SSS						
EPRE ratio of PDSCH to PDSCH_DMRS						
EPRE ratio of OCNG DMRS to SSS						
EPRE ratio of OCNG to OCNG DMRS						
N_{oc}[Note2]		dBm/15 KHz	1, 2	-100	-104	-100
N_{oc}[Note2]		dBm/SCS	1, 2	-100	-104	-100
$\hat{E}_s/N_{oc}$		dB	1, 2	12	0	-4
$\hat{E}_s/I_{ot}$[Note3]		dB	1, 2	12	0	-4
SS-RSRP[Note3]		dBm/SCS	1, 2	-88	-104	-104
Io[Note3]		dBm/9.36 MHz	1, 2	-59.78	-73.04	-70.59

Propagation condition		1, 2	AWGN
Antenna Configuration and Correlation Matrix		1, 2	1x2 Low

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.7.3.1.6.2-4: Cell specific test parameters for Cell 2

Parameter	Unit	Configuration	Cell 2		
			T1	T2	T3
RF channel number		1, 2	2		
Duplex mode		1, 2	FDD		
TDD special subframe configuration[Note1]		4, 5, 6	6		
TDD uplink-downlink configuration[Note1]		4, 5, 6	1		
$BW_{channel}$	MHz	1, 2	10 MHz: $N_{RB,c}$ = 50		
PRACH Configuration[Note2]		1, 2	4		
PDSCH parameters: DL Reference Measurement Channel[Note3]		1, 2	10 MHz: R.3 FDD		
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note3]		1, 2	10 MHz: R.6 FDD		
OCNG Patterns[Note3]		1, 2	10 MHz: OP.10 FDD		
PBCH_RA	dB	1, 2	0		
PBCH_RB					
PSS_RA					
SSS_RA					
PCFICH_RB					
PHICH_RA					
PHICH_RB					
PDCCH_RA					
PDCCH_RB					
PDSCH_RA					
PDSCH_RB					
OCNG_RA[Note4]					
OCNG_RB[Note4]					
N_{oc}[Note5]	dBm/15kHz	1, 2	-98		
$\hat{E}_s/N_{oc}$	dB	1, 2	-Infinity	8	78
$\hat{E}_s/I_{ot}$[Note6]	dB	1, 2	-Infinity	78	78
RSRP[Note6]	dBm/15kHz	1, 2	-Infinity	-90	-90
SCH_RP[Note6]	dBm/15kHz	1, 2	-Infinity	-90	-90
Io[Note6]	dBm/9MHz	1, 2	-67.21 +10log($N_{RB,c}$/100)	-58.57 +10log($N_{RB,c}$/100)	-58.57 +10log($N_{RB,c}$/100)
Propagation Condition		1, 2	AWGN		
Antenna Configuration and Correlation Matrix Note7		1, 2	1x2 Low		

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [23].
Note 3: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 4: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 6: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 7: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].

Table A.7.3.1.6.2-5: Cell specific test parameters for Cell 3

Parameter	Unit	Config	Test		
			T1	T2	T3
E-UTRA Channel Number		1,2	1		
NR Channel Number		1,2	2		
Duplex Mode		1,2	TDD		
TDD configuration		1,2	TDDConf.3.1		
$BW_{channel}$	MHz	1,2	100: NRB,c = 66		
Data RBs allocated		1,2	48		
Initial BWP Configuration		1,2	DLBWP.0.1 ULBWP.0.1		
Dedicated BWP Configuration		1,2	DLBWP.1.1 ULBWP.1.1		
TRS Configuration		1,2	TRS.2.1 TDD		
PDSCH/PDCCH TCI state		1,2	TCI.State.2		
PDSCH Reference measurement channel		1,2	SR.3.3 TDD		
RMSI CORESET Reference Channel		1,2	CR.3.2 TDD		
Dedicated CORESET Reference Channel		1,2	CCR.3.7 TDD		
OCNG Patterns		1,2	OP.3		
SSB configuration		1,2	SSB.2 FR2		
SMTC configuration		1,2	SMTC.2		
PDSCH/PDCCH subcarrier spacing	kHz	1,2	120		
TRS Configuration		1,2	TRS.2.1 TDD		
CSI-RS configuration for CSI reporting		1,2	CSI-RS.3.1 TDD		
reportConfigType		1,2	periodic		
reportQuantity		1,2	cri-RI-PMI-CQI		
CSI reporting periodicity	slot	1,2	40		
CSI reporting offset	slot	1,2	4		
EPRE ratio of PSS to SSS	dB	1,2	0		
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
Propagation condition		1,2	AWGN		

Table A.7.3.1.6.2-6: OTA related test parameters

Parameter	Unit	Cell 3

		T1	T2	T3
Angle of arrival configuration		Setup 2a according to clause A.3.15.2.1		
Assumption for UE beams Note 6		Rough		
$\hat{E}_s/N_{oc}$ Ês Note2	dBm/SCS	-Infinity	-81	
SSB_RP Note2, Note 4	dBm/SCS	-Infinity	-81	
$\hat{E}_s/I_{ot}$ BB Note 2, Note 7	dB	-Infinity	4.88	
Io Note 2, Note 4	dBm/95.04 MHz	N/A	-56.41	

Note 1: Void
Note 2: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: Void
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: Void
Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 7: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.

A.7.3.1.6.3 Test Requirements

The UE shall start to transmit the PRACH to PSCell less than 692 ms into T3.

The rate of correct PSCell addition observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: $D_{HOwithPSCell_PSCell} = T_{RRC_delay} + T_{processing} + T_{search_HO} + T_{search_PSCell} + T_{\Delta} + T_{PSCell_DU} + 2$ ms, where:

RRC procedure delay = 50 ms and is specified in clause 12 in TS 38.331 [2].

$T_{processing}$ is as defined as 50ms in the test.

T_{search_HO} is as defined as 80ms in the test.

T_{search_PSCell} is as defined as 480ms in the test.

T_{Δ} is defined as 20ms in the test.

T_{PSCell_DU} is defined as 10ms in the test.

This gives a total of 692 ms.

A.7.3.1.7 HO with PSCell from FR1 NR-SA to EN-DC with known E-UTRA PCell and known FR2 PSCell

A.7.3.1.7.1 Test purpose and environment

The purpose of this test is to verify that the delay of HO with PSCell from FR1 NR-SA to EN-DC with known E-UTRA PCell and known FR2 PSCell are within the requirements stated in clause 6.1.5.2.2 of TS 36.133 [15] for the case when the E-UTRA PCell and FR2 PSCell are known by the UE at the time of handover with PSCell.

Supported test configurations are shown in A.7.3.1.7.11. The test parameters for the E-UTRA cell are given in Table A.3.7.2.2-1. The E-UTRA cell once set up is not changed across time.

The test parameters for NR cell are given in Tables A.7.3.1.7.1-2, cell-specific parameters in A.7.3.1.7.1-3, A.7.3.1.7.1-4, A.7.3.1.7.1-5 and OTA parameters in A.7.3.1.7.1-6 below. The test consists of three successive time periods with duration of T1, T2, and T3. There are three carriers each with one cell. Before the test starts the UE is connected to Cell 1 (source FR1 PCell) on radio channel 1 (FR1 PCC) and is aware of Cell 2 (target E-UTRA PCell) on radio channel 2 and Cell 3 (FR2 target PSCell) on radio channel 3. The UE is monitoring both cell 2 and cell 3 before receives a RRC message implying handover with PSCell. At the start of time duration T1, the UE does not have any timing information of Cell 2 and Cell 3. Starting T2, Cell 2 and Cell 3 becomes detectable and the UE is expected to detect and send a measurement report. Gap pattern configuration with id #0 as specified in Table 9.1.2-1 is configured before T2 begins to enable inter-RAT frequency monitoring.

The test system shall send a RRC message to the UE to trigger HO (Cell 2) with PSCell (Cell 3) during period T2, after UE has reported Event B2. The point in time at which the RRC message implying HO (Cell 2) with PSCell (Cell 3) is received at the UE antenna connector defines the start of period T3. The test system shall observe the UE sends PRACH to the PSCell (Cell 3) during period T3.

Table A.7.3.1.7.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
1	Source FR1 PCell: NR FDD, SSB SCS 15kHz, data SCS 15 kHz, 10 MHz bandwidth Target PCell: LTE FDD, Target PSCell: NR TDD, SSB SCS 120 kHz, data SCS 120 kHz, BW 100 MHz
2	Source FR1 PCell: NR FDD, SSB SCS 15kHz, data SCS 15 kHz, 10 MHz bandwidth Target PCell: LTE TDD, Target PSCell: NR TDD, SSB SCS 240 kHz, data SCS 120 kHz, BW 100 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.7.3.1.7.1-2: General Test Parameters for HO with PSCell

Parameter		Unit	Value	Comment
RF Channel Number			1, 2, 3	Three radio channels are used for this test. One for FR1 source PCell, second for E-UTRA target PCell and third for target NR PSCell
Initial Condition	Active PCell		Cell1	PCell on RF channel number 1.
	Neighbour cell		Cell2, Cell3	Neighbour cell on RF channel number 2 and 3.
Final Condition	Active PCell		Cell2	E-UTRA PCell on RF channel number 2.
	Active PSCell		Cell3	PSCell on RF channel number 3.
	Neighbour Cell		Cell1	RF channel number 1
NR measurement quantity			SS-RSRP	
E-UTRAN measurement quantity			RSRP	
b2-Threshold1		dBm	As specified in Table A.6.3.1.4-3	Absolute NR SS-RSRP threshold for event B2
b2-Threshold2EUTRAN		dBm	-98	Absolute E-UTRAN RSRP threshold for event B2
Hysteresis		dB	0	
TimeToTrigger		s	0	
Filter coefficient			0	L3 filtering is not used
DRX			OFF	Non-DRX test
Access Barring Information		-	Not sent	No additional delays in random access procedure
PRACH configuration on cell3			FR2 configuration 2	Captured in A.3.8.3.2
Time offset between cell 1 and 2			3 ms	Asynchronous cells
Gap pattern configuration Id			0	As specified in Table 9.1.2-1 started before T2 starts

Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on primary component carrier.
Cell-individual offset for cells on RF channel number 3	dB	0	Individual offset for cells on carrier frequency of cell3.
T1	s	5	
T2	s	≤5	During this time the cell 2 and cell 3 shall be known.
T3	s	1	During this time the UE perform HO with PSCell addition.

Table A.7.3.1.7.1-3: Cell specific test parameters for Cell 1

Parameter		Unit	Configuration	Cell 1		
				T1	T2	T3
RF channel number			1, 2	1		
Duplex mode			1, 2	FDD		
$BW_{channel}$		MHz	1, 2	10: $N_{RB,c}$ = 52 (FDD)		
PDSCH reference measurement channel			1, 2	SR.1.1 FDD		
CORSET reference channel			1, 2	CR.1.1 FDD		
TRS configuration			1, 2	TRS.1.1 FDD		
OCNG pattern[Note1]			1, 2	OP.1		
BWP	Initial DL BWP		1, 2	DLBWP.0.1		
	Dedicated DL BWP			DLBWP.1.1		
	Initial UL BWP			ULBWP.0.1		
	Dedicated UL BWP			ULBWP.1.1		
SMTC configuration			1, 2	SMTC.1		
SSB configuration			1, 2	SSB.1 FR1		
b2-Threshold1		dBm	1, 2	-96		
EPRE ratio of PSS to SSS		dB	1, 2	0		
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						
EPRE ratio of PDCCH to PDCCH_DMRS						
EPRE ratio of PDSCH_DMRS to SSS						
EPRE ratio of PDSCH to PDSCH_DMRS						
EPRE ratio of OCNG DMRS to SSS						
EPRE ratio of OCNG to OCNG DMRS						
N_{oc}[Note2]		dBm/15 KHz	1, 2	-100	-104	-100
N_{oc}[Note2]		dBm/SCS	1, 2	-100	-104	-100
$\hat{E}_s/N_{oc}$		dB	1, 2	12	0	-4
$\hat{E}_s/I_{ot}$[Note3]		dB	1, 2	12	0	-4
SS-RSRP[Note3]		dBm/SCS	1, 2	-88	-104	-104
Io[Note3]		dBm/9.36 MHz	1, 2	-59.78	-73.04	-70.59
Propagation condition			1, 2	AWGN		
Antenna Configuration and Correlation Matrix			1, 2	1x2 Low		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.7.3.1.7.1-4: Cell specific test parameters for Cell 2

Parameter	Unit	Configuration	Cell 2		
			T1	T2	T3
RF channel number		1, 2	2		
Duplex mode		1, 2	FDD		
TDD special subframe configuration[Note1]		4, 5, 6	6		
TDD uplink-downlink configuration[Note1]		4, 5, 6	1		
$BW_{channel}$	MHz	1, 2	10 MHz: $N_{RB,c}$ = 50		
PRACH Configuration[Note2]		1, 2	4		
PDSCH parameters: DL Reference Measurement Channel[Note3]		1, 2	10 MHz: R.3 FDD		
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note3]		1, 2	10 MHz: R.6 FDD		
OCNG Patterns[Note3]		1, 2	10 MHz: OP.10 FDD		
PBCH_RA	dB	1, 2	0		
PBCH_RB					
PSS_RA					
SSS_RA					
PCFICH_RB					
PHICH_RA					
PHICH_RB					
PDCCH_RA					
PDCCH_RB					
PDSCH_RA					
PDSCH_RB					
OCNG_RA[Note4]					
OCNG_RB[Note4]					
N_{oc}[Note5]	dBm/15kHz	1, 2	-98		
$\hat{E}_s/N_{oc}$	dB	1, 2	-Infinity	8	78
$\hat{E}_s/I_{ot}$[Note6]	dB	1, 2	-Infinity	78	78
RSRP[Note6]	dBm/15kHz	1, 2	-Infinity	-90	-90
SCH_RP[Note6]	dBm/15kHz	1, 2	-Infinity	-90	-90
Io[Note6]	dBm/9MHz	1, 2	-67.21 +10log($N_{RB,c}$/100)	-58.57 +10log($N_{RB,c}$/100)	-58.57 +10log($N_{RB,c}$/100)
Propagation Condition		1, 2	AWGN		
Antenna Configuration and Correlation Matrix Note7		1, 2	1x2 Low		

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [23].
Note 3: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 4: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 6: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 7: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].

Table A.7.3.1.7.1-5: Cell specific test parameters for Cell 3

Parameter	Unit	Config	Test		
			T1	T2	T3
E-UTRA Channel Number		1,2	1		
NR Channel Number		1,2	2		
Duplex Mode		1,2	TDD		
TDD configuration		1,2	TDDConf.3.1		
$BW_{channel}$	MHz	1,2	100: NRB,c = 66		
Data RBs allocated		1,2	48		
Initial BWP Configuration		1,2	DLBWP.0.1 ULBWP.0.1		
Dedicated BWP Configuration		1,2	DLBWP.1.1 ULBWP.1.1		
TRS Configuration		1,2	TRS.2.1 TDD		
PDSCH/PDCCH TCI state		1,2	TCI.State.2		
PDSCH Reference measurement channel		1,2	SR.3.3 TDD		
RMSI CORESET Reference Channel		1,2	CR.3.2 TDD		
Dedicated CORESET Reference Channel		1,2	CCR.3.7 TDD		
OCNG Patterns		1,2	OP.3		
SSB configuration		1,2	SSB.2 FR2		
SMTC configuration		1,2	SMTC.2		
PDSCH/PDCCH subcarrier spacing	kHz	1,2	120		
TRS Configuration		1,2	TRS.2.1 TDD		
CSI-RS configuration for CSI reporting		1,2	CSI-RS.3.1 TDD		
reportConfigType		1,2	periodic		
reportQuantity		1,2	cri-RI-PMI-CQI		
CSI reporting periodicity	slot	1,2	40		
CSI reporting offset	slot	1,2	4		
EPRE ratio of PSS to SSS	dB	1,2	0		
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
Propagation condition		1,2	AWGN		

Table A.7.3.1.7.1-6: OTA related test parameters

Parameter	Unit	Cell 3		
		T1	T2	T3
Angle of arrival configuration		Setup 2a according to clause A.3.15.2.1		
Assumption for UE beams[Note 6]		Rough		

$\hat{E}_s/N_{oc}$ Ês Note2	dBm/SCS	-Infinity	-81
SSB_RP Note2, Note 4	dBm/SCS	-Infinity	-81
$\hat{E}_s/I_{ot}$ BB Note 2, Note 7	dB	-Infinity	4.88
Io Note 2, Note 4	dBm/95.04 MHz	N/A	-56.41
Note 1: Void Note 2: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: Void Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone Note 5: Void Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation Note 7: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.			

A.7.3.1.7.2 Test Requirements

The UE shall transmit the PRACH to PSCell at latest 137 ms Note1 into T3.

The rate of correct observed PSCell addition delay in HO with PSCell during repeated tests shall be at least 90%.

Note1: The PSCell addition delay can be expressed as follows as specified in clause 6.1.5.2:

$$D_{HOwithPSCell_PSCell} = T_{RRC_delay} + T_{processing} + T_{search_HO} + T_{search_PSCell} + T_{\Delta} + T_{PSCell_DU} + 2 \text{ ms}$$

Where:

T_{RRC_delay} = 50ms

$T_{processing}$ = 45ms

T_{search_HO} = 0 ms

T_{search_PSCell} = 0 ms

T_{Δ} = 20ms

T_{PSCell_DU} = 1*10+10 = 20 ms

A.7.3.1.8 NR PSCell change delay in HO with PSCell from NR-DC to NR-DC

A.7.3.1.8.1 Test Purpose and Environment

The purpose of this test is to verify the PSCell change delay requirements in HO with PSCell from NR-DC to NR-DC defined in clauses 6.1.5.4.2. The requirements are applicable to NR FR1-FR1 inter-frequency PCell handover and NR FR2-FR2 intra-frequency PSCell change.

The supported test configurations are given in Table A.7.3.1.8.1-1. The test scenario comprises four NR cells, source PCell(Cell 1) and source PSCell(Cell 2), target PCell(Cell 3), target PSCell(Cell 4).

Cell 1 and Cell 3 are on radio channel 1 in FR1.Cell 2 and Cell 4 are on radio channel 2 in FR2. Test parameters are given in Tables A.7.3.1.8.1-2, A.7.3.1.8.1-3, A.7.3.1.8.1-4 and A.7.3.1.8.1-5 below. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of T1, the UE shall be connected to Cell 1 on radio channel 1 and Cell 2 on radio channel 2. UE is not aware of Cell 3 and Cell 4. Starting T2, cell 3 and

Cell 4 becomes detectable and the UE receives a RRC handover command from the network. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

Table A.7.3.1.8.1-1: Supported test configurations for HO with PSCell from NR-DC to NR-DC

Config	Description
1	Source PCell: FR1 NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target PCell: FR1 NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Source PSCell: FR2 NR 120kHz SSB SCS, 100MHz bandwidth, TDD duplex mode Target PSCell: FR2 NR 120kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
2	Source PCell: FR1 NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target PCell: FR1 NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Source PSCell: FR2 NR 120kHz SSB SCS, 100MHz bandwidth, TDD duplex mode Target PSCell: FR2 NR 120kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
3	Source PCell: FR1 NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target PCell: FR1 NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Source PSCell: FR2 NR 120kHz SSB SCS, 100MHz bandwidth, TDD duplex mode Target PSCell: FR2 NR 120kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.7.3.1.8.1-2: General test parameters for PCell FR1-FR1 Inter frequency handover

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 3	
Final condition	Active cell		Cell 3	
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
T1		s	5	
T2		s	≤5	

Table A.7.3.1.8.1-3: Cell specific test parameters for PCell FR1-FR1 Inter frequency handover

Parameter		Unit	Cell 1		Cell 3	
			T1	T2	T1	T2
NR RF Channel Number			1		2	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
TRS configuration	Config 1		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
DRx Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD			
	Config 2		SR.1.1 TDD			
	Config 3		SR2.1 TDD			
CORESET Reference Channel	Config 1		CR.1.1 FDD			
	Config 2		CR.1.1 TDD			

	Config 3		CR2.1 TDD			
OCNG Patterns			OP.1			
SMTC Configuration			SMTC.1			
SSB Configuration	Config 1,2		SSB.1 FR1			
	Config 3		SSB.2 FR1			
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
PRACH configuration			FR1 PRACH configuration 1			
BWP	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-98		-98	
N_{oc} Note2	Config 1,2	dBm/SCS	-98		-98	
	Config 3		-95		-95	
$\hat{E}_s / I_{ot}$		dB	4	4	-Infinity	5
$\hat{E}_s / N_{oc}$		dB	4	4	-Infinity	5
SSB_RP	Config 1,2	dBm/SCS	-94	-94	-Infinity	-93
	Config 3	dBm/SCS	-91	-91	-Infinity	-90
Io Note3	Config 1,2	dBm/ 9.36MHz	-64.59	-64.59	-70.05	-63.85
	Config 3	dBm/ 38.16MHz	-58.49	-58.49	-63.94	-57.75
Propagation condition		-	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.7.3.1.8.1-4: General test parameters Intra-frequency FR2-FR2 PSCell change

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 2	
	Neighbouring cell		Cell 4	
Final condition	Active cell		Cell 4	
A4-Offset		dBm	-120	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used

Access Barring Information	-	Not Sent	No additional delays in random access procedure.
Time offset between cells		3 μs	Synchronous cells
T1	s	5	
T2	s	≤10	

Table A.7.3.1.8.1-5: Cell specific test parameters for Intra-frequency FR2-FR2 PSCell change

Parameter		Unit	Cell 2		Cell 4	
			T1	T2	T1	T2
Assumption for UE beams[Note 6]			Rough		Rough	
AoA setup			Setup 1 as defined in A.3.15			
NR RF Channel Number			**1**		**1**	
Duplex mode			TDD			
TDD configuration			TDDConf.3.1			
$BW_{channel}$		MHz	100: $N_{RB,c}$ = 66			
BWP BW		MHz	100: $N_{RB,c}$ = 66			
Data RBs allocated			66			
DRx Cycle		ms	Not Applicable			
PDSCH Reference measurement channel			SR3.1 TDD			
RMSI CORESET Reference Channel			CR3.1 TDD			
Control Channel RMC			CCR.3.1 TDD			
OCNG Patterns			O P. 1			
SMTC Configuration			SMTC pattern 1			
SSB Configuration			SSB. 3 FR2			
PDSCH/PDCCH subcarrier spacing		kHz	120 kHz			
PUCCH/PUSCH subcarrier spacing		kHz	120 kHz			
PRACH configuration			FR2 PRACH configuration 1			
TRS configuration			TRS.2.1 TDD			
PDSCH/PDCCH TCI state			TCI.State.2			
BWP configuraiton	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} [Note2]		dBm/15kHz	-104.7			
N_{oc} [Note2]		dBm/SCS	-95.7			
$\hat{E}_s / I_{ot}$		dB	6	-1.8	-Infinity	0
$\hat{E}_s / N_{oc}$		dB	6	6	-Infinity	7
Io[Note3]		dBm/BW	-59.7	-56.7	-59.7	-56.7
Propagation condition		-	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3:	Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5:	As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 6:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.3.1.8.2 Test Requirements

The UE shall start to transmit the PRACH to target PSCell (Cell 4) less than 83 ms from the beginning of time period T2.

The rate of correct handovers observed during repeated tests shall be at least 90%.

A.7.3.1.9 Intra-frequency handover from FR2-2 to FR2-2; unknown target cell

A.7.3.1.9.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR2-2-NR FR2-2 intra frequency handover requirements specified in clause 6.1.1.4.

A.7.3.1.9.2 Test Parameters

Supported test configurations are shown in table A.7.3.1.9.2-1. Both handover delay and interruption length are tested by using the parameters in table A.7.3.1.9.2-2, and A.7.3.1.9.2-3.

The test scenario comprises of carriers and one cell on each carrier. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE receives a RRC handover command from the network. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

Table A.7.3.1.9.2-1: Intra-frequency handover from FR2-2 to FR2-2 test configurations

Configuration	Description
1	NR TDD, SSB SCS 120 kHz, data SCS 120 kHz, BW 100 MHz
2	NR TDD, SSB SCS 480 kHz, data SCS 480 kHz, BW 400 MHz
3	NR TDD, SSB SCS 960 kHz, data SCS 960 kHz, BW 400 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.7.3.1.9.2-2: General test parameters Intra-frequency handover from FR2-2 to FR2-2

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
A4-Offset		dBm	-120	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	≤10	

Table A.7.3.1.9.2-3: Cell specific test parameters for NR FR2-2-FR2-2 Intra frequency handover test case

Parameter		Unit	Config	Cell 1		Cell 2	
				T1	T2	T1	T2
Assumption for UE beams[Note 6]			1,2,3	Rough		Rough	
AoA setup			1,2,3	Setup 1 as defined in A.3.15			
NR RF Channel Number			1,2,3	**1**		**1**	
Duplex mode			1,2,3	TDD			
TDD configuration			1	TBD			
			2	TBD			
			3	TBD			
$BW_{channel}$		MHz	1	100: $N_{RB,c}$ = 66			
			2	400: $N_{RB,c}$ = 66			
			3	400: $N_{RB,c}$ = 33			
Data RBs allocated			1	66			
			2	66			
			3	33			
DRx Cycle		ms	1,2,3	Not Applicable			
PDSCH Reference measurement channel			1	SR3.1 TDD			
			2	TBD			
			3	TBD			
RMSI CORESET Reference Channel			1	CR3.1 TDD			
			2	TBD			
			3	TBD			
Control Channel RMC			1	CCR.3.1 TDD			
			2	TBD			
			3	TBD			
OCNG Patterns			1,2,3	O P. 1			
SMTC Configuration			1,2,3	SMTC pattern 1			
SSB Configuration			1	SSB. 3 FR2			
			2	TBD			
			3	TBD			
PDSCH/PDCCH subcarrier spacing		kHz	1	120			
			2	480			
			3	960			
PUCCH/PUSCH subcarrier spacing		kHz	1	120			
			2	480			
			3	960			
PRACH configuration			1,2,3	FR2 PRACH configuration 1			
TRS configuration			1	TRS.2.1 TDD			
			2	TBD			
			3	TBD			
PDSCH/PDCCH TCI state			1,2,3	TCI.State.2			
BWP configuraiton	Initial DL BWP		1,2,3	DLBWP.0.1			
	Dedicated DL BWP		1,2,3	DLBWP.1.1			
	Initial UL BWP		1,2,3	ULBWP.0.1			
	Dedicated UL BWP		1,2,3	ULBWP.1.1			
EPRE ratio of PSS to SSS		dB		0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							

EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15kHz		-104.7			
N_{oc} Note2	dBm/SCS	1	-95.7			
		2	-89.7			
		3	-86.7			
$\hat{E}_s / I_{ot}$	dB		6	-1.8	-Infinity	0
$\hat{E}_s / N_{oc}$	dB		6	6	-Infinity	7
Io Note3	dBm/95.04 MHz Note4		-59.7	-56.7	-59.7	-56.7
	dBm/380.16 MHz Note4		-53.7	-50.7	-53.7	-50.7
Propagation condition	-		AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.3.1.9.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 772 ms from the beginning of time period T2.
The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2].

$T_{interrupt}$ = 762 ms in the test. $T_{interrupt}$ is defined in clause 6.1.1.4.2.

This gives a total of 772 ms.

A.7.3.1.10 Inter-frequency handover from FR2-2 to FR2-2; unknown target cell

A.7.3.1.10.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR2-2-NR FR2-2 Inter frequency handover requirements specified in clause 6.1.1.4.

A.7.3.1.10.2 Test Parameters

Supported test configurations are shown in table A.7.3.1.10.2-1. Both handover delay and interruption length are tested by using the parameters in table A.7.3.1.10.2-2, and A.7.3.1.10.2-3.

The test scenario comprises of carriers and one cell on each carrier. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE receives a RRC handover command from the network. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

Table A.7.3.1.10.2-1: Inter-frequency handover from FR2-2 to FR2-2 test configurations

Configuration	Description
1	NR TDD, SSB SCS 120 kHz, data SCS 120 kHz, BW 100 MHz
2	NR TDD, SSB SCS 480 kHz, data SCS 480 kHz, BW 400 MHz
3	NR TDD, SSB SCS 960 kHz, data SCS 960 kHz, BW 400 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.7.3.1.10.2-2: General test parameters Inter-frequency handover from FR2-2 to FR2-2

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
A4-Offset		dBm	-120	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	≤10	

Table A.7.3.1.10.2-3: Cell specific test parameters for NR FR2-2-FR2-2 Inter frequency handover test case

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
Assumption for UE beams[Note 6]		1,2,3	Rough		Rough	
AoA setup		1,2,3	Setup 1 as defined in A.3.15			
NR RF Channel Number		1,2,3	**1**		**2**	
Duplex mode		1,2,3	TDD			
TDD configuration		1	TBD			
		2	TBD			
		3	TBD			
$BW_{channel}$	MHz	1	100: $N_{RB,c}$ = 66			
		2	400: $N_{RB,c}$ = 66			
		3	400: $N_{RB,c}$ = 33			
Data RBs allocated		1	66			
		2	66			
		3	33			
DRx Cycle	ms	1,2,3	Not Applicable			
PDSCH Reference measurement channel		1	SR3.1 TDD			
		2	TBD			
		3	TBD			
RMSI CORESET Reference Channel		1	CR3.1 TDD			
		2	TBD			
		3	TBD			
Control Channel RMC		1	CCR.3.1 TDD			
		2	TBD			

		3	TBD			
OCNG Patterns		1,2,3	O P. 1			
SMTC Configuration		1,2,3	SMTC pattern 1			
SSB Configuration		1	SSB. 3 FR2			
		2	TBD			
		3	TBD			
PDSCH/PDCCH subcarrier spacing	kHz	1	120			
		2	480			
		3	960			
PUCCH/PUSCH subcarrier spacing	kHz	1	120			
		2	480			
		3	960			
PRACH configuration		1,2,3	FR2 PRACH configuration 1			
TRS configuration		1	TRS.2.1 TDD			
		2	TBD			
		3	TBD			
PDSCH/PDCCH TCI state		1,2,3	TCI.State.2			
BWP configuraiton	Initial DL BWP	1,2,3	DLBWP.0.1			
	Dedicated DL BWP	1,2,3	DLBWP.1.1			
	Initial UL BWP	1,2,3	ULBWP.0.1			
	Dedicated UL BWP	1,2,3	ULBWP.1.1			
EPRE ratio of PSS to SSS	dB		0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15kHz		-104.7			
N_{oc} Note2	dBm/SCS	1	-95.7			
		2	-89.7			
		3	-86.7			
$\hat{E}_s / I_{ot}$	dB		6	6	-Infinity	7
$\hat{E}_s / N_{oc}$	dB		6	6	-Infinity	7
Io Note3	dBm/95.04 MHz Note4		-59.7	-59.7	-58.9	-58.9
	dBm/380.16 MHz Note4		-53.7	-53.7	-52.9	-52.9
Propagation condition	-		AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone

Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone

Note 6:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.3.1.10.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 772 ms from the beginning of time period T2.
The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2].

$T_{interrupt}$ = 762 ms in the test. $T_{interrupt}$ is defined in clause 6.1.1.4.2.

This gives a total of 772 ms.

A.7.3.1.11 Inter-frequency handover from FR1 to FR2-2; unknown target cell

A.7.3.1.11.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR1-NR FR2-2 Inter frequency handover requirements specified in clause 6.1.1.4.

A.7.3.1.11.2 Test Parameters

Supported test configurations are shown in table A.7.3.1.11.2-1 and A.7.3.1.11.2-1A, and the configuration for NR Cell1 and NR Cell2 are chosen independently. Both handover delay and interruption length are tested by using the parameters in table A.7.3.1.11.2-2, and A.7.3.1.11.2-3.

The test scenario comprises of carriers and one cell on each carrier. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE receives a RRC handover command from the network. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

Table A.7.3.1.11.2-1: Inter-frequency handover from FR1 to FR2-2 test configurations for Cell1

Configuration	Description
1	NR TDD, SSB SCS 120 kHz, data SCS 120 kHz, BW 100 MHz
2	NR TDD, SSB SCS 480 kHz, data SCS 480 kHz, BW 400 MHz
3	NR TDD, SSB SCS 960 kHz, data SCS 960 kHz, BW 400 MHz
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.7.3.1.11.2-1A: Inter-frequency handover from FR1 to FR2-2 test configurations for Cell2

Configuration	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration	

Table A.7.3.1.11.2-2: General test parameters Inter-frequency handover from FR1 to FR2-2

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
A4-Offset		dBm	-120	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	≤10	

Table A.7.3.1.11.2-3: Cell specific test parameters for NR FR1-FR2-2 Inter frequency handover test case

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
Assumption for UE beams[Note 6]		1,2,3	-		Rough	
AoA setup		1,2,3	-		Setup 1 as defined in A.3.15	
NR RF Channel Number		1,2,3	**1**		**2**	
Duplex mode		1	FDD		TDD	
		2,3	TDD		TDD	
TDD configuration		1	-		TBD	
		2	TDDConf.1.1		TBD	
		3	TDDConf.2.1		TBD	
$BW_{channel}$	MHz	1	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
		2	10: $N_{RB,c}$ = 52		400: $N_{RB,c}$ = 66	
		3	40: $N_{RB,c}$ = 106		400: $N_{RB,c}$ = 33	
Data RBs allocated		1	52		66	
		2	52		66	
		3	106		33	
DRx Cycle	ms	1,2,3	Not Applicable		Not Applicable	
PDSCH Reference measurement channel		1	SR.1.1 FDD		SR3.1 TDD	
		2	SR.1.1 TDD		TBD	
		3	SR2.1 TDD		TBD	
RMSI CORESET Reference Channel		1	CR.1.1 FDD		CR3.1 TDD	
		2	CR.1.1 TDD		TBD	
		3	CR2.1 TDD		TBD	
Control Channel RMC		1	CCR.1.1 FDD		CCR.3.1 TDD	
		2	CCR.1.1 TDD		TBD	
		3	CCR.2.1 TDD		TBD	
OCNG Patterns		1,2,3	O P. 1		O P. 1	
SMTC Configuration		1	SMTC.1		SMTC pattern 1	
		2,3	SMTC.2		SMTC pattern 1	
SSB Configuration		1	SSB.1 FR1		SSB. 3 FR2	
		2	SSB.2 FR1		TBD	
		3	SSB.2 FR1		TBD	
PDSCH/PDCCH subcarrier spacing	kHz	1	15		120	
		2	30		480	
		3	30		960	
PUCCH/PUSCH subcarrier spacing	kHz	1	15		120	
		2	30		480	
		3	30		960	

PRACH configuration			1,2,3	FR1 PRACH configuration 1	FR2 PRACH configuration 1	
TRS configuration			1	TRS.1.1 FDD	TRS.2.1 TDD	
			2	TRS.1.1 TDD	TBD	
			3	TRS.1.2 TDD	TBD	
PDSCH/PDCCH TCI state			1,2,3	-	TCI.State.2	
BWP configuraiton	Initial DL BWP		1,2,3	DLBWP.0.1	DLBWP.0.1	
	Dedicated DL BWP		1,2,3	LBWP.1.1	DLBWP.1.1	
	Initial UL BWP		1,2,3	ULBWP.0.1	ULBWP.0.1	
	Dedicated UL BWP		1,2,3	ULBWP.1.1	ULBWP.1.1	
EPRE ratio of PSS to SSS		dB		0	0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz		Link only, see clause A.3.7A	-104.7	
N_{oc} Note2		dBm/SCS	1		-95.7	
			2		-89.7	
			3		-86.7	
$\hat{E}_s / I_{ot}$		dB			-Infinity	7
$\hat{E}_s / N_{oc}$		dB			-Infinity	7
Io Note3		dBm/95.04 MHz Note4			-58.9	-58.9
		dBm/380.16 MHz Note4			-52.9	-52.9
Propagation condition		-			AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.3.1.11.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 772 ms from the beginning of time period T2.
The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2].

$T_{interrupt}$ = 762 ms in the test. $T_{interrupt}$ is defined in clause 6.1.1.4.2.

This gives a total of 772 ms.

A.7.3.2 RRC Connection Mobility Control

A.7.3.2.1 SA: RRC Re-establishment

A.7.3.2.1.1 Intra-frequency RRC Re-establishment in FR2

A.7.3.2.1.1.1 Test Purpose and Environment

The purpose is to verify that the NR intra-frequency RRC re-establishment delay in FR2 without known target cell is within the specified limits. These tests will verify the requirements in clause 6.2.1.

The test parameters are given in table A.7.3.2.1.1.1-1, table A.7.3.2.1.1.1-2 and table A.7.3.2.1.1.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, becomes inactive. The time period T3 starts after the occurrence of the radio link failure.

Table A.7.3.2.1.1.1-1: Supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.3.2.1.1.1-2: General test parameters for NR intra-frequency RRC Re-establishment test case in FR2

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1	Cell1	
	Neighbour cells		1	Cell2	
Final condition	Active cell		1	Cell2	
RF Channel Number			1	1	
Time offset between cells			1	3 µs	Synchronous cells
N310		-	1	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1	1	Minimum consecutive in-sync indications from lower layers
T310		ms	1	0	Radio link failure timer; T310 is disabled
T311		ms	1	5000	RRC re-establishment timer
Access Barring Information		-	1	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR2	
SMTC configuration			1	SMTC pattern 1	
DRX cycle length		s	1	OFF	
PRACH configuration			1	FR2 PRACH configuration 1	Table A.3.8.3.1-1
T1		s	1	5	

T2	s	1	4.84	Time for the UE to detect RLF (Summation of $T_{Evaluate_out_SSB}$ defined in clause 8.1 in TS 38.133, T310 and the period for UE turns off transmitter defined in clause 8.1.5 in TS 38.133)
T3	s	1	5	

Table A.7.3.2.1.1.1-3: Cell specific test parameters for NR intra-frequency RRC Re-establishment test case in FR2

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Assumption for UE beams Note 4			Rough			Rough		
TDD configuration		1	TDDConf.3.1			TDDConf.3.1		
$BW_{channel}$	MHz	1	100: $N_{RB,c}$ = 66			100: $N_{RB,c}$ = 66		
Data RBs allocated		1	24			24		
PDSCH RMC configuration		1	SR.3.1 TDD			N/A		
RMSI CORESET RMC configuration		1	CR.3.1 TDD			CR.3.1 TDD		
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD			CCR.3.1 TDD		
TRS configuration		1	TRS.2.1 TDD			N/A		
PDSCH/PDCCH TCI state		1	TCI.State.2			N/A		
OCNG Pattern		1	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1	SSB			SSB		
AoA setup		1	Setup 1 defined in A.3.15.1			Setup 1 defined in A.3.15.1		
$\hat{E}_s / I_{ot}$	dB	1	-0.12	-infinity	-infinity	-3.46	2	2
N_{oc} Note2	dBm/15 kHz	1	-104.7					
N_{oc} Note2	dBm/SCS	1	-95.7					
$\hat{E}_s / N_{oc}$	dB	1	4	-infinity	-infinity	2	2	2
SS-RSRP Note3	dBm/SCS	1	-91.7	-infinity	-infinity	-93.7	-93.7	-93.7
Io	dBm/95.04 MHz	1	-59.64	-62.59	-62.59	-59.94	-62.59	-62.59
Propagation Condition		1	AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.3.2.1.1.2 Test Requirements

he RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to an unknown NR intra frequency cell shall be less than 5 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{re\text{-}establish_delay} = T_{UL_grant} + T_{UE_re\text{-}establish_delay}.$$

Where:

T_{UL_grant} = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence T_{UL_grant} is not used.

$$T_{UE_re-establish_delay} = 50 \text{ ms} + T_{identify_intra_NR} + \sum_{i=1}^{Nfreq-1} T_{identify_inter_NR,i} + T_{SI-NR} + T_{PRACH}$$

$N_{freq} = 1$

$T_{identify_intra_NR} = 3520$ ms

$T_{SI} = 1280$ ms; it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target intra-frequency NR cell.

$T_{PRACH} = 15$ ms; it is the additional delay caused by the random access procedure.

This gives a total of 4865 ms, allow 5 s in the test case.

A.7.3.2.1.2 Inter-frequency RRC Re-establishment in FR2

A.7.3.2.1.2.1 Test Purpose and Environment

The purpose is to verify that the NR inter-frequency RRC re-establishment delay in FR2 without known target cell is within the specified limits. These tests will verify the requirements in clause 6.2.1.

The test parameters are given in table A.7.3.2.1.2.1-1, table A.7.3.2.1.2.1-2 and table A.7.3.2.1.2.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, becomes inactive. The time period T3 starts after the occurrence of the radio link failure. During T1, the UE shall be configured with the carrier frequency of cell 2 (with RF Channel Number #2) to ensure that the UE has the context of the carrier frequency of cell 2 by the end of T1.

Table A.7.3.2.1.2.1-1: Supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.3.2.1.2.1-2: General test parameters for NR inter-frequency RRC Re-establishment test case in FR2

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1	Cell1	
	Neighbour cells		1	Cell2	

Final condition	Active cell		1	Cell2	
RF Channel Number			1	1, 2	
Time offset between cells			1	3 μs	Synchronous cells
N310		-	1	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1	1	Minimum consecutive in-sync indications from lower layers
T310		ms	1	0	Radio link failure timer; T310 is disabled
T311		ms	1	5000	RRC re-establishment timer
Access Barring Information		-	1	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR2	
SMTC configuration			1	SMTC pattern 1	
DRX cycle length		s	1	OFF	
PRACH configuration			1	FR2 PRACH configuration 1	Table A.3.8.3.1-1
T1		s	1	5	
T2		s	1	4.84	Time for the UE to detect RLF (Summation of $T_{Evaluate_out_SSB}$ defined in clause 8.1 in TS 38.133, T310 and the period for UE turns off transmitter defined in clause 8.1.5 in TS 38.133)
T3		s	1	6	

Table A.7.3.2.1.2.1-3: Cell specific test parameters for NR inter-frequency RRC Re-establishment test case in FR2

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Assumption for UE beams Note 4			Rough			Rough		
AoA setup		1	Setup 3 as specified in clause A.3.15					
			AoA1			AoA2		
TDD configuration		1	TDDConf.3.1			TDDConf.3.1		
$BW_{channel}$	MHz	1	100: $N_{RB,c}$ = 66			100: $N_{RB,c}$ = 66		
Data RBs allocated		1	24			24		
PDSCH RMC configuration		1	SR.3.1 TDD			N/A		
RMSI CORESET RMC configuration		1	CR.3.1 TDD			CR.3.1 TDD		
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD			CCR.3.1 TDD		
TRS configuration		1	TRS.2.1 TDD			N/A		
PDSCH/PDCCH TCI state		1	TCI.State.2			N/A		
OCNG Pattern		1	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1	SSB			SSB		
N_{oc} Note2	dBm/15 kHz	1	-92.1			-92.1		

N_{oc} Note2	dBm/SCS	1	-83.1			-83.1		
$\hat{E}_s / N_{oc}$	dB	1	0	-infinity	-infinity	-infinity	-infinity	0
$\hat{E}_s / I_{ot}$ BB Note 5	dB	1	-1.01	-infinity	-infinity	-infinity	-infinity	-1.01
SSB_RP Note3	dBm/SCS	1	-83.1	-infinity	-infinity	-infinity	-infinity	-83.1
Io	dBm/95.04 MHz	1	-55.46	-58.51	-58.51	-58.51	-58.51	-55.46
Propagation Condition		1	AWGN			AWGN		

Note 1: OCNG shall be used such that a constant total transmitted power is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 5: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.

A.7.3.2.1.2.2 Test Requirements

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to an unknown NR inter frequency cell shall be less than 6 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{re\text{-}establish_delay} = T_{UL_grant} + T_{UE_re\text{-}establish_delay}.$$

Where:

T_{UL_grant} = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence T_{UL_grant} is not used.

$$T_{UE_re-establish_delay} = 50 \text{ ms} + T_{identify_intra_NR} + \sum_{i=1}^{Nfreq-1} T_{identify_inter_NR,i} + T_{SI-NR} + T_{PRACH}$$

$N_{freq} = 2$

$T_{identify_intra_NR}$ = 1600 ms

$T_{identify_inter_NR}$ = 2080 ms

T_{SI} = 1280 ms; it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target inter-frequency NR cell.

T_{PRACH} = 15 ms; it is the additional delay caused by the random access procedure.

This gives a total of 5025 ms, allow 6 s in the test case.

A.7.3.2.1.3 Intra-frequency RRC Re-establishment in FR2 without serving cell timing

A.7.3.2.1.3.1 Test Purpose and Environment

The purpose is to verify that the NR intra-frequency RRC re-establishment delay in FR2 without serving cell timing is within the specified limits. These tests will verify the requirements in clause 6.2.1.

The test parameters are given in table A.7.3.2.1.3.1-1, table A.7.3.2.1.3.1-2 and table A.7.3.2.1.3.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, is deactivated. The time period T3 starts after the occurrence of the radio link failure.

Table A.7.3.2.1.3.1-1: Supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.3.2.1.3.1-2: General test parameters for NR intra-frequency RRC Re-establishment test case in FR2

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1	Cell1	
	Neighbour cells		1	Cell2	
Final condition	Active cell		1	Cell2	
RF Channel Number			1	1	
Time offset between cells			1	3 μs	Synchronous cells
N310		-	1	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1	1	Minimum consecutive in-sync indications from lower layers
T310		ms	1	6000	Radio link failure timer configured by *RLF-TimersAndConstants*
T311		ms	1	5000	RRC re-establishment timer
Access Barring Information		-	1	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR2	
SMTC configuration			1	SMTC pattern 1	
DRX cycle length		s	1	OFF	
PRACH configuration			1	FR2 PRACH configuration 1	Table A.3.8.3.1-1
T1		s	1	5	
T2		s	1	10.84	Time for the UE to detect RLF (Summation of $T_{Evaluate_out_SSB}$ defined in clause 8.1 in TS 38.133, T310 and the period for UE turns off transmitter defined in clause 8.1.5 in TS 38.133)
T3		s	1	5	

Table A.7.3.2.1.3.1-3: Cell specific test parameters for NR intra-frequency RRC Re-establishment test case in FR2

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Assumption for UE beams Note 4			Rough			Rough		
TDD configuration		1	TDDConf.3.1			TDDConf.3.1		
PDSCH RMC configuration		1	SR.3.1 TDD			N/A		
RMSI CORESET RMC configuration		1	CR.3.1 FDD			CR.3.1 FDD		
Dedicated CORESET RMC configuration		1	CCR.3.1 FDD			CCR.3.1 FDD		
TRS configuration		1	TRS.2.1 TDD			N/A		
PDSCH/PDCCH TCI state		1	TCI.State.2			N/A		
OCNG Pattern		1	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1	SSB			SSB		
AoA setup		1	Setup 1 defined in A.3.15.1			Setup 1 defined in A.3.15.1		
$\hat{E}_s/I_{ot}$	dB	1	5	-infinity	-infinity	-infinity	-infinity	5
N_{oc} Note2	dBm/15 kHz	1	-104.7					
N_{oc} Note2	dBm/SCS	1	-95.7					
$\hat{E}_s/N_{oc}$	dB	1	5	-infinity	-infinity	-infinity	-infinity	5
SS-RSRP Note3	dBm/SCS	1	-90.7	-infinity	-infinity	-infinity	-infinity	-90.7
Io	dBm/95.04 MHz	1	-60.52	-66.71	-60.52	-60.52	-66.71	-60.52
Propagation Condition		1	AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.3.2.1.3.2 Test Requirements

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to an unknown NR intra frequency cell without serving cell timing shall be less than 5 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{re\text{-}establish_delay} = T_{UL_grant} + T_{UE_re\text{-}establish_delay}.$$

Where:

T_{UL_grant} = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence T_{UL_grant} is not used.

$T_{UE_re-establish_delay} = 50 \text{ ms} + T_{identify_intra_NR} + \sum_{i=1}^{Nfreq-1} T_{identify_inter_NR,i} + T_{SI-NR} + T_{PRACH}$

$N_{freq} = 1$

$T_{identify_intra_NR} = 3520$ ms

$T_{SI} = 1280$ ms; it is the time required for receiving all the relevant system information as defined in TS 38.331 [2] for the target intra-frequency NR cell.

$T_{PRACH} = 15$ ms; it is the additional delay caused by the random access procedure.

This gives a total of 4865 ms, allow 5 s in the test case.

A.7.3.2.1.4 Intra-frequency RRC Re-establishment in FR2-2

A.7.3.2.1.4.1 Test Purpose and Environment

The purpose is to verify that the NR intra-frequency RRC re-establishment delay in FR2-2 without known target cell is within the specified limits. These tests will verify the requirements in clause 6.2.1.

The test parameters are given in table A.7.3.2.1.4.1-1, table A.7.3.2.1.4.1-2 and table A.7.3.2.1.4.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, becomes inactive. The time period T3 starts after the occurrence of the radio link failure.

Table A.7.3.2.1.4.1-1: Supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	NR 480 kHz SSB SCS, 400MHz bandwidth, TDD duplex mode
3	NR 960 kHz SSB SCS, 400MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.7.3.2.1.4.1-2: General test parameters for NR intra-frequency RRC Re-establishment test case in FR2-2

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1,2,3	Cell1	
	Neighbour cells		1,2,3	Cell2	
Final condition	Active cell		1,2,3	Cell2	
RF Channel Number			1,2,3	1	
Time offset between cells			1,2,3	3 μs	Synchronous cells
N310		-	1,2,3	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1,2,3	1	Minimum consecutive in-sync indications from lower layers
T310		ms	1,2,3	0	Radio link failure timer; T310 is disabled

T311	ms	1,2,3	5000	RRC re-establishment timer
Access Barring Information	-	1,2,3	Not Sent	No additional delays in random access procedure.
SSB configuration		1,2,3	SSB.1 FR2	
SMTC configuration		1,2,3	SMTC pattern 1	
DRX cycle length	s	1,2,3	OFF	
PRACH configuration		1,2,3	FR2 PRACH configuration 1	Table A.3.8.3.1-1
T1	s	1,2,3	5	
T2	s	1,2,3	4.84	Time for the UE to detect RLF (Summation of $T_{Evaluate_out_SSB}$ defined in clause 8.1 in TS 38.133, T310 and the period for UE turns off transmitter defined in clause 8.1.5 in TS 38.133)
T3	s	1,2,3	5	

Table A.7.3.2.1.4.1-3: Cell specific test parameters for NR intra-frequency RRC Re-establishment test case in FR2-2

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Assumption for UE beams Note 4		1,2,3	Rough			Rough		
TDD configuration		1,2,3	TDDConf.3.1			TDDConf.3.1		
$BW_{channel}$	MHz	1	100: $N_{RB,c}$ = 66			100: $N_{RB,c}$ = 66		
Data RBs allocated		1	24			24		
PDSCH RMC configuration		1,2,3	SR.3.1 TDD			N/A		
RMSI CORESET RMC configuration		1,2,3	CR.3.1 TDD			CR.3.1 TDD		
Dedicated CORESET RMC configuration		1,2,3	CCR.3.1 TDD			CCR.3.1 TDD		
TRS configuration		1,2,3	TRS.2.1 TDD			N/A		
PDSCH/PDCCH TCI state		1,2,3	TCI.State.2			N/A		
OCNG Pattern		1,2,3	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1,2,3	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1,2,3	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1,2,3	SSB			SSB		
AoA setup		1,2,3	Setup 1 defined in A.3.15.1			Setup 1 defined in A.3.15.1		
$\hat{E}_s / I_{ot}$	dB	1,2,3	-0.12	-infinity	-infinity	-3.46	2	2
N_{oc} Note2	dBm/15 kHz	1,2,3	-104.7					
N_{oc} Note2	dBm/SCS	1	-95.7					
		2	-95.7					
		3	-92.7					
$\hat{E}_s / N_{oc}$	dB	1,2,3	4	-infinity	-infinity	2	2	2
SS-RSRP Note3	dBm/SCS	1	-91.7	-infinity	-infinity	-93.7	-93.7	-93.7
		2	TBD	TBD	TBD	TBD	TBD	TBD
		3	TBD	TBD	TBD	TBD	TBD	TBD
Io	dBm/95.04 MHz	1	-59.64	-62.59	-62.59	-59.94	-62.59	-62.59
	dBm/380.16 MHz	2	TBD	TBD	TBD	TBD	TBD	TBD

	dBm/380.16 MHz	3	TBD	TBD	TBD	TBD	TBD	TBD
Propagation Condition		1,2,3	AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.3.2.1.4.2 Test Requirements

he RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to an unknown NR intra frequency cell shall be less than 5 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{re\text{-}establish_delay} = T_{UL_grant} + T_{UE_re\text{-}establish_delay}.$$

Where:

T_{UL_grant} = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence T_{UL_grant} is not used.

$$T_{UE_re-establish_delay} = 50 \text{ ms} + T_{identify_intra_NR} + \sum_{i=1}^{Nfreq-1} T_{identify_inter_NR,i} + T_{SI-NR} + T_{PRACH}$$

N_{freq} = 1

$T_{identify_intra_NR}$ = 3520 ms

T_{SI} = 1280 ms; it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target intra-frequency NR cell.

T_{PRACH} = 15 ms; it is the additional delay caused by the random access procedure.

This gives a total of 4865 ms, allow 5 s in the test case.

A.7.3.2.1.5 Inter-frequency RRC Re-establishment in FR2-2

A.7.3.2.1.5.1 Test Purpose and Environment

The purpose is to verify that the NR inter-frequency RRC re-establishment delay in FR2-2 without known target cell is within the specified limits. These tests will verify the requirements in clause 6.2.1.

The test parameters are given in table A.7.3.2.1.5.1-1, table A.7.3.2.1.5.1-2 and table A.7.3.2.1.5.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, becomes inactive. The time period T3 starts after the occurrence of the radio link failure. During T1, the UE shall be configured with the carrier frequency of cell 2 (with RF Channel Number #2) to ensure that the UE has the context of the carrier frequency of cell 2 by the end of T1.

Table A.7.3.2.1.5.1-1: Supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	NR 480 kHz SSB SCS, 400MHz bandwidth, TDD duplex mode
3	NR 960 kHz SSB SCS, 400MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.7.3.2.1.5.1-2: General test parameters for NR inter-frequency RRC Re-establishment test case in FR2-2

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1,2,3	Cell1	
	Neighbour cells		1,2,3	Cell2	
Final condition	Active cell		1,2,3	Cell2	
RF Channel Number			1,2,3	1, 2	
Time offset between cells			1,2,3	3 µs	Synchronous cells
N310		-	1,2,3	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1,2,3	1	Minimum consecutive in-sync indications from lower layers
T310		ms	1,2,3	0	Radio link failure timer; T310 is disabled
T311		ms	1,2,3	5000	RRC re-establishment timer
Access Barring Information		-	1,2,3	Not Sent	No additional delays in random access procedure.
SSB configuration			1,2,3	SSB.1 FR2	
SMTC configuration			1,2,3	SMTC pattern 1	
DRX cycle length		s	1,2,3	OFF	
PRACH configuration			1,2,3	FR2 PRACH configuration 1	Table A.3.8.3.1-1
T1		s	1,2,3	5	
T2		s	1,2,3	4.84	Time for the UE to detect RLF (Summation of $T_{Evaluate_out_SSB}$ defined in clause 8.1 in TS 38.133, T310 and the period for UE turns off transmitter defined in clause 8.1.5 in TS 38.133)
T3		s	1,2,3	6	

Table A.7.3.2.1.5.1-3: Cell specific test parameters for NR inter-frequency RRC Re-establishment test case in FR2-2

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Assumption for UE beams[Note 4]			Rough			Rough		
AoA setup		1,2,3	Setup 3 as specified in clause A.3.15					
			AoA1			AoA2		
TDD configuration		1,2,3	TDDConf.3.1			TDDConf.3.1		
$BW_{channel}$	MHz	1	100: $N_{RB,c}$ = 66			100: $N_{RB,c}$ = 66		
Data RBs allocated		1	24			24		

PDSCH RMC configuration		1,2,3	SR.3.1 TDD			N/A		
RMSI CORESET RMC configuration		1,2,3	CR.3.1 TDD			CR.3.1 TDD		
Dedicated CORESET RMC configuration		1,2,3	CCR.3.1 TDD			CCR.3.1 TDD		
TRS configuration		1,2,3	TRS.2.1 TDD			N/A		
PDSCH/PDCCH TCI state		1,2,3	TCI.State.2			N/A		
OCNG Pattern		1,2,3	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1,2,3	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1,2,3	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1,2,3	SSB			SSB		
N_{oc} Note2	dBm/15 kHz	1,2,3	-92.1			-92.1		
N_{oc} Note2	dBm/SCS	1	-83.1			-83.1		
		2	TBD			TBD		
		3	TBD			TBD		
$\hat{E}_s / N_{oc}$	dB	1,2,3	0	-infinity	-infinity	-infinity	-infinity	0
$\hat{E}_s / I_{ot}$ BB Note 5	dB	1,2,3	-1.01	-infinity	-infinity	-infinity	-infinity	-1.01
SSB_RP Note3	dBm/SCS	1	-83.1	-infinity	-infinity	-infinity	-infinity	-83.1
		2	TBD	TBD	TBD	TBD	TBD	TBD
		3	TBD	TBD	TBD	TBD	TBD	TBD
Io	dBm/95.04 MHz	1	-55.46	-58.51	-58.51	-58.51	-58.51	-55.46
	dBm/380.16 MHz	2	TBD	TBD	TBD	TBD	TBD	TBD
	dBm/380.16 MHz	3	TBD	TBD	TBD	TBD	TBD	TBD
Propagation Condition		1,2,3	AWGN			AWGN		

Note 1: OCNG shall be used such that a constant total transmitted power is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 5: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.

A.7.3.2.1.5.2 Test Requirements

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to an unknown NR inter frequency cell shall be less than 6 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{re\text{-}establish_delay} = T_{UL_grant} + T_{UE_re\text{-}establish_delay}.$$

Where:

T_{UL_grant} = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence T_{UL_grant} is not used.

$T_{UE_re-establish_delay} = 50\text{ ms} + T_{identify_intra_NR} + \sum_{i=1}^{Nfreq-1} T_{identify_inter_NR,i} + T_{SI-NR} + T_{PRACH}$

N_{freq} = 2

$T_{identify_intra_NR}$ = 1600 ms

$T_{identify_inter_NR}$ = 2080 ms

T_{SI} = 1280 ms; it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target inter-frequency NR cell.

T_{PRACH} = 15 ms; it is the additional delay caused by the random access procedure.

This gives a total of 5025 ms, allow 6 s in the test case.

A.7.3.2.1.6 Intra-frequency RRC Re-establishment in FR2-2 without serving cell timing

A.7.3.2.1.6.1 Test Purpose and Environment

The purpose is to verify that the NR intra-frequency RRC re-establishment delay in FR2-2 without serving cell timing is within the specified limits. These tests will verify the requirements in clause 6.2.1.

The test parameters are given in table A.7.3.2.1.6.1-1, table A.7.3.2.1.6.1-2 and table A.7.3.2.1.6.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, is deactivated. The time period T3 starts after the occurrence of the radio link failure.

Table A.7.3.2.1.6.1-1: Supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	NR 480 kHz SSB SCS, 400MHz bandwidth, TDD duplex mode
3	NR 960 kHz SSB SCS, 400MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.7.3.2.1.6.1-2: General test parameters for NR intra-frequency RRC Re-establishment test case in FR2-2

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1,2,3	Cell1	
	Neighbour cells		1,2,3	Cell2	
Final condition	Active cell		1,2,3	Cell2	
RF Channel Number			1,2,3	1	
Time offset between cells			1,2,3	3 μs	Synchronous cells
N310		-	1,2,3	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1,2,3	1	Minimum consecutive in-sync indications from lower layers
T310		ms	1,2,3	6000	Radio link failure timer configured by *RLF-TimersAndConstants*
T311		ms	1,2,3	5000	RRC re-establishment timer

Access Barring Information	-	1,2,3	Not Sent	No additional delays in random access procedure.
SSB configuration		1,2,3	SSB.1 FR2	
SMTC configuration		1,2,3	SMTC pattern 1	
DRX cycle length	s	1,2,3	OFF	
PRACH configuration		1,2,3	FR2 PRACH configuration 1	Table A.3.8.3.1-1
T1	s	1,2,3	5	
T2	s	1,2,3	10.84	Time for the UE to detect RLF (Summation of $T_{Evaluate_out_SSB}$ defined in clause 8.1 in TS 38.133, T310 and the period for UE turns off transmitter defined in clause 8.1.5 in TS 38.133)
T3	s	1,2,3	5	

Table A.7.3.2.1.6.1-3: Cell specific test parameters for NR intra-frequency RRC Re-establishment test case in FR2-2

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Assumption for UE beams Note 4			Rough			Rough		
TDD configuration		1,2,3	TDDConf.3.1			TDDConf.3.1		
PDSCH RMC configuration		1,2,3	SR.3.1 TDD			N/A		
RMSI CORESET RMC configuration		1,2,3	CR.3.1 FDD			CR.3.1 FDD		
Dedicated CORESET RMC configuration		1,2,3	CCR.3.1 FDD			CCR.3.1 FDD		
TRS configuration		1,2,3	TRS.2.1 TDD			N/A		
PDSCH/PDCCH TCI state		1,2,3	TCI.State.2			N/A		
OCNG Pattern		1,2,3	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1,2,3	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1,2,3	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1,2,3	SSB			SSB		
AoA setup		1,2,3	Setup 1 defined in A.3.15.1			Setup 1 defined in A.3.15.1		
$\hat{E}_s/I_{ot}$	dB	1,2,3	5	-infinity	-infinity	-infinity	-infinity	5
N_{oc} Note2	dBm/15 kHz	1,2,3	-104.7					
N_{oc} Note2	dBm/SCS	1	-95.7					
		2	-95.7					
		3	-92.7					
$\hat{E}_s/N_{oc}$	dB	1,2,3	5	-infinity	-infinity	-infinity	-infinity	5
SS-RSRP Note3	dBm/SCS	1	-90.7	-infinity	-infinity	-infinity	-infinity	-90.7
		2	TBD	TBD	TBD	TBD	TBD	TBD
		3	TBD	TBD	TBD	TBD	TBD	TBD
Io	dBm/95.04 MHz	1	-60.52	-66.71	-60.52	-60.52	-66.71	-60.52
	dBm/380.16 MHz	2	TBD	TBD	TBD	TBD	TBD	TBD
	dBm/380.16 MHz	3	TBD	TBD	TBD	TBD	TBD	TBD
Propagation Condition		1,2,3	AWGN					

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.3.2.1.6.2 Test Requirements

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to an unknown NR intra frequency cell without serving cell timing shall be less than 5 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{re\text{-}establish_delay} = T_{UL_grant} + T_{UE_re\text{-}establish_delay}.$$

Where:

T_{UL_grant} = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence T_{UL_grant} is not used.

$$T_{UE_re-establish_delay} = 50 \text{ ms} + T_{identify_intra_NR} + \sum_{i=1}^{Nfreq-1} T_{identify_inter_NR,i} + T_{SI-NR} + T_{PRACH}$$

N_{freq} = 1

$T_{identify_intra_NR}$ = 3520 ms

T_{SI} = 1280 ms; it is the time required for receiving all the relevant system information as defined in TS 38.331 [2] for the target intra-frequency NR cell.

T_{PRACH} = 15 ms; it is the additional delay caused by the random access procedure.

This gives a total of 4865 ms, allow 5 s in the test case.

A.7.3.2.2 Random Access

A.7.3.2.2.1 4-step RA type c ontention based random access test in FR2 for NR Standalone

A.7.3.2.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in Clause 6.2.2.2 and Clause 7.1.2 in an AWGN model.

For this test one cell is used, with the configuration of Cell 1 configured as PCell or SCell in FR2. Supported test parameters are shown in Table A.7.3.2.2.1.1-1. UE capable of SA with PCell or SCell in FR2 needs to be tested by using the parameters in Table A.7.3.2.2.1.1-2 and Table A.7.3.2.2.1.1-3.

Table A.7.3.2.2.1.1-1: Supported test configurations for contention based random access test in FR2 for NR Standalone

Config	Description
1	NR PSCell/SCell 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.3.2.2.1.1-2: General test parameters for contention based random access test in FR2 for NR Standalone

Parameter		Unit	Test-1	Comments
SSB Configuration	Config 1		SSB.1 FR2	As defined in A.3.10
CSI-RS for tracking	Config 1		TRS.2.1 TDD	
Duplex Mode for Cell 1	Config 1		TDD	
TDD Configuration	Config 1		TDDConf.3.1	As defined in A.3.1.4
$BW_{channel}$	Config 1	MHz	100: $N_{RB,c}$ = 66	
Data RBs allocated	Config 1		24	
OCNG Pattern Note 1			OCNG pattern 1	As defined in A.3.2.1.
PDSCH Reference Channel Note 2	Config 1		SR.3.1 TDD	As defined in A.3.1.1.
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD	As defined in A.3.1.2
NR RF Channel Number			1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH_DMRS to SSS		dB		
EPRE ratio of PBCH to PBCH_DMRS		dB		
EPRE ratio of PDCCH_DMRS to SSS		dB		
EPRE ratio of PDCCH to PDCCH_DMRS		dB		
EPRE ratio of PDSCH_DMRS to SSS		dB		
EPRE ratio of PDSCH to PDSCH_DMRS		dB		
ss-PBCH-BlockPower		dBm/ SCS	+20 +Δ_{UL}	As defined in TS 38.331 [2]. Δ_{UL} is derived from the uplink calibration process Note 3
Configured UE transmitted power ($P_{CMAX,\ f,c}$)		dBm	maximum value configurable for certain power class	As defined in clause 6.2.4 in TS 38.101-2 [19]
PRACH Configuration			FR2 PRACH configuration 1	As defined in A.3.8.3, with exceptions as defined below
rsrp-ThresholdSSB		dBm	RSRP_69 +Δ_{DL}	RSRP_69 corresponds to -88dBm. Δ_{DL} is derived from the downlink calibration process Note 4
preambleReceivedTargetPower		dBm	-100	As defined in TS 38.331 [2]

Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.

Note 2: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.

Note 3: The Δ_{UL} value is calculated as -ROUND(P_{PRACH0} -1), where P_{PRACH0} is the measured first PRACH power with -80.6dBm/SCS applied, *preambleReceivedTargetPower* = -100dBm and *ss-PBCH-BlockPower* = 20dBm. These values are used during the uplink calibration process carried out before the test case is run, with the UE configured to send PRACH.

Note 4: The Δ_{DL} value is calculated as ($RSRP_{REP}$ – RSRP_76), where $RSRP_{REP}$ is the SS-RSRP Reported value in Table 10.1.6.1-1 with -80.6dBm/SCS applied. These values are used during the downlink calibration process carried out before the test case is run, with the UE configured to report SS-RSRP. For a Reported value RSRP_x, x is treated as a positive integer value.

Table A.7.3.2.2.1.1-3: OTA-related test parameters for contention based random access test in FR2 for NR Standalone

Parameter		Unit	Test-1	Comments
AoA setup			Setup 1	As defined in A.3.15.1
Assumption for UE beams[Note 3]			Rough	
SSB with index 0	Es [Note1]	dBm/SCS	-80.6	Power of SSB with index 0 is set to be above configured *rsrp-ThresholdSSB*
	SSB_RP	dBm/SCS	-80.6	
	Es/Iot_{BB}	dB	21.09	
	Io	dBm/95.04 MHz	-56.01	Io in symbols containing SSB index 0
SSB with index 1	Es [Note1]	dBm/SCS	-95.0	Power of SSB with index 1 is set to be below configured *rsrp-ThresholdSSB*
	SSB_RP	dBm/SCS	-95.0	
	Es/Iot_{BB}	dB	6.69	
	Io	dBm/95.04 MHz	-70.41	Io in symbols containing SSB index 1
Propagation Condition		-	AWGN	

Note 1: No articial noise is applied in this test.
Note 2: Void.
Note 3: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.3.2.2.1.2 Test Requirements

Contention based random access is triggered by *not* explicitly assigning a random access preamble via dedicated signalling in the downlink.

A.7.3.2.2.1.2.1 Random Access Preamble Transmission

To test the UE behavior specified in Clause 6.2.2.2.1.1 the System Simulator shall receive the Random Access Preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SS-RSRP above the configured *rsrp-ThresholdSSB*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.7.3.2.2.1.2.2 Random Access Response Reception

To test the UE behavior specified in Clause 6.2.2.2.1.2 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 3 preambles have been received by the System Simulator. In response to the first 2 preambles, the System Simulator shall transmit a Random Access Response *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for Random Access Response(s) and shall transmit the msg3 if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if all

received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.7.3.2.2.1.2.3 No Random Access Response Reception

To test the UE behavior specified in clause 6.2.2.2.1.3 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 3 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 2 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.7.3.2.2.1.2.4 Receiving an UL grant for msg3 retransmission

To test the UE behavior specified in clause 6.2.2.2.1.4 the System Simulator shall provide an UL grant for msg3 retransmission following a successful Random Access Response.

The UE shall re-transmit the msg3 upon the reception of an UL grant for msg3 retransmission.

A.7.3.2.2.1.2.5 Reception of an Incorrect Message over Temporary C-RNTI

To test the UE behavior specified in Clause 6.2.2.2.1.5 the System Simulator shall send a message addressed to the temporary C-RNTI with a UE Contention Resolution Identity included in the MAC control element *not* matching the CCCH SDU transmitted in msg3 uplink message.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires unless the received message includes a UE Contention Resolution Identity MAC control element and the UE Contention Resolution Identity included in the MAC control element matches the CCCH SDU transmitted in the uplink message.

A.7.3.2.2.1.2.6 Reception of a Correct Message over Temporary C-RNTI

To test the UE behavior specified in Clause 6.2.2.2.1.5 the System Simulator shall send a message addressed to the temporary C-RNTI with a UE Contention Resolution Identity included in the MAC control element matching the CCCH SDU transmitted in the msg3 uplink message.

The UE shall send ACK if the Contention Resolution is successful.

A.7.3.2.2.1.2.7 Contention Resolution Timer expiry

To test the UE behavior specified in Clause 6.2.2.2.1.6 the System Simulator shall *not* send a response to a msg3.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if the Contention Resolution Timer expires.

A.7.3.2.2.2 4-step RA type n on-contention based random access test in FR2 for NR Standalone

A.7.3.2.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in Clause 6.2.2.2 and Clause 7.1.2 in an AWGN model.

For this test one cell is used, with the configuration of Cell 1 configured as PCell or SCell in FR2. Supported test parameters are shown in Table A.7.3.2.2.2.1-1. UE capable of SA with PCell or SCell in FR2 needs to be tested by using the parameters in Table A.7.3.2.2.2.1-2 and Table A.7.3.2.2.2.1-3 for SSB-based non-contention based random access test (Test 1) and CSI-RS-based non-contention based random access test (Test 2). Test 2 is only applicable to UE which supports csi-RSRP-AndRSRQ-MeasWithSSB or csi-RSRP-AndRSRQ-MeasWithoutSSB.

Table A.7.3.2.2.2.1-1: Supported test configurations for non-contention based random access test in FR2 for NR Standalone

Config	Description
1	NR PSCell/SCell 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.3.2.2.2.1-2: General test parameters for non-contention based random access test in FR2 for NR Standalone

Parameter		Unit	Test-1	Test-2	Comments
SSB Configuration	Config 1		SSB.1 FR2	SSB.1 FR2	As defined in A.3.10
CSI-RS for tracking	Config 1		TRS.2.1 TDD	TRS.2.1 TDD	
CSI-RS Configuration	Config 1		N/A	CSI-RS.3.1 TDD	As defined in A.3.1.4
Duplex Mode for Cell 2	Config 1		TDD	TDD	
TDD Configuration	Config 1		TDDConf.3.1	TDDConf.3.1	
$BW_{channel}$	Config 1	MHz	100: $N_{RB,c}$ = 66	100: $N_{RB,c}$ = 66	
Data RBs allocated	Config 1		24	24	
OCNG Pattern Note 1			OP.3	OP.3	As defined in A.3.2.1.
PDSCH Reference Channel Note 2	Config 1		SR3.1 TDD	SR3.1 TDD	As defined in A.3.1.1.
NR RF Channel Number			1	1	
EPRE ratio of PSS to SSS		dB	0	0	
EPRE ratio of PBCH_DMRS to SSS		dB			
EPRE ratio of PBCH to PBCH_DMRS		dB			
EPRE ratio of PDCCH_DMRS to SSS		dB			
EPRE ratio of PDCCH to PDCCH_DMRS		dB			
EPRE ratio of PDSCH_DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH_DMRS		dB			
ss-PBCH-BlockPower		dBm/ SCS	+20 +Δ_{UL}	+20 +Δ_{UL}	As defined in TS 38.331 [2].

				Δ_{UL} is derived from the uplink calibration process Note 3
Configured UE transmitted power ($P_{CMAX,\ f,\ c}$)	dBm	maximum value configurable for certain power class	maximum value configurable for certain power class	As defined in clause 6.2.4 in TS 38.101-2 [19]
PRACH Configuration		FR2 PRACH configuration 2	FR2 PRACH configuration 3	As defined in A.3.8.3, with exceptions as defined below.
rsrp-ThresholdSSB	dBm	RSRP_69 +Δ_{DL}	RSRP_69 +Δ_{DL}	RSRP_69 corresponds to -88dBm. Δ_{DL} is derived from the downlink calibration process Note 4
preambleReceivedTargetPower	dBm	-100	-100	As defined in TS 38.331 [2]

Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.
Note 2: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.
Note 3: The Δ_{UL} value is calculated as -ROUND(P_{PRACH0} -1), where P_{PRACH0} is the measured first PRACH power with -80.6dBm/SCS applied, *preambleReceivedTargetPower* = -100dBm and *ss-PBCH-BlockPower* = 20dBm. These values are used during the uplink calibration process carried out before the test case is run, with the UE configured to send PRACH.
Note 4: The Δ_{DL} value is calculated as ($RSRP_{_REP}$ – RSRP_76), where $RSRP_{_REP}$ is the SS-RSRP Reported value in Table 10.1.6.1-1 with -80.6dBm/SCS applied. These values are used during the downlink calibration process carried out before the test case is run, with the UE configured to report SS-RSRP. For a Reported value RSRP_x, x is treated as a positive integer value.

Table A.7.3.2.2.2.1-3: OTA-related test parameters for non-contention based random access test in FR2 for NR Standalone

Parameter		Unit	Test-1	Test-2	Comments
AoA setup			Setup 1	Setup 1	As defined in A.3.15.1
Assumption for UE beams Note 3			Rough	Rough	
SSB with index 0	Es Note1	dBm/SCS	-80.6	-80.6	Power of SSB with index 0 is set to be above configured *rsrp-ThresholdSSB*
	SSB_RP	dBm/SCS	-80.6	-80.6	
	Es/Iot_{BB}	dB	21.09	21.09	
	Io	dBm/95.04 MHz	-56.01	-56.01	Io in symbols containing SSB index 0
SSB with index 1	Es Note1	dBm/SCS	-95.0	-95.0	Power of SSB with index 1 is set to be below configured *rsrp-ThresholdSSB*
	SSB_RP	dBm/SCS	-95.0	-95.0	
	Es/Iot_{BB}	dB	6.69	6.69	
	Io	dBm/95.04 MHz	-70.41	-70.41	Io in symbols containing SSB index 1
Propagation Condition		-	AWGN	AWGN	

Note 1: No articial noise is applied in this test.
Note 2: void.

Note 3:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.3.2.2.2.2 Test Requirements

Non-Contention based random access is triggered by explicitly assigning a random access preamble via dedicated signalling in the downlink. In the test, the non-contention based random access procedure is not initialized for Other SI requested from UE or beam failure recovery.

A.7.3.2.2.2.2.1 SSB-based Random Access Preamble Transmission

In Test-1, to test the UE behavior specified in Clause 6.2.2.2.2.1 for SSB-based Random Access Preamble tranmsision, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs configured, the System Simulator shall receive the Random Access Preamble which has the Preamble Index associated with the SSB with index 0.

In addition, the System Simulator shall receive the Random Access Preamble on the PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0, and the selected PRACH occasion shall belongs to the PRACH occassions permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.7.3.2.2.2.2.2 CSI-RS-based Random Access Preamble Transmission

In Test-1, to test the UE behavior specified in Clause 6.2.2.2.2.1 for CSI-RS-based Random Access Preamble tranmsision, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with CSI-RSs configured, the System Simulator shall receive the Random Access Preamble which has the Preamble Index associated with the CSI-RS configured.

In addition, the System Simulator shall receive the Random Access Preamble on the PRACH occasion which belongs to the PRACH occasions corresponding to the CSI-RS configured, and the selected PRACH occasion shall belongs to the PRACH occassions permitted by the restrictions given by the *ra-OccasionList*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.7.3.2.2.2.2.3 Random Access Response Reception

To test the UE behavior specified in Clause 6.2.2.2.2.2 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 3 preambles have been received by the System Simulator. In response to the first 2 preambles, the System Simulator shall transmit a Random Access Response *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for Random Access Response(s) if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power if all received Random Access

Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.7.3.2.2.2.2.4 No Random Access Response Reception

To test the UE behavior specified in clause 6.2.2.2.2.3 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 3 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 2 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window configured in *RACH-ConfigCommon*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.7.3.2.2.3 2-step RA type contention based random access test in FR2 for NR Standalone

A.7.3.2.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the 2-step RA type random access procedure is according to the requirements and that the MsgA PRACH, MsgA PUSCH power settings and timing are within specified limits. This test will verify the requirements in Clause 6.2.2.3 and Clause 7.1.2 in an AWGN model.

For this test one cell is used, with the configuration of Cell 1 configured as PCell or SCell in FR2. Supported test parameters are shown in Table A.7.3.2.2.3.1-1. UE capable of SA with PCell or SCell in FR2 needs to be tested by using the parameters in Table A.7.3.2.2.3.1-2 and Table A.7.3.2.2.3.1-3.

Table A.7.3.2.2.3.1-1: Supported test configurations for 2-step RA type contention based random access test in FR2 for NR Standalone

Config	Description
1	NR PSCell/SCell 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.3.2.2.3.1-2: General test parameters for 2-step RA type contention based random access test in FR2 for NR Standalone

Parameter		Unit	Test-1	Comments
SSB Configuration	Config 1		SSB.1 FR2	As defined in A.3.10
Duplex Mode for Cell 1	Config 1		TDD	
TDD Configuration	Config 1		TDDConf.3.1	As defined in A.3.1.4
$BW_{channel}$	Config 1	MHz	100: $N_{RB,c}$ = 24	
OCNG Pattern Note 1			OCNG pattern 1	As defined in A.3.2.1.
PDSCH Reference Channel Note 2	Config 1		SR.3.1 TDD	As defined in A.3.1.1.

RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD	As defined in A.3.1.2
NR RF Channel Number			1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH_DMRS to SSS		dB		
EPRE ratio of PBCH to PBCH_DMRS		dB		
EPRE ratio of PDCCH_DMRS to SSS		dB		
EPRE ratio of PDCCH to PDCCH_DMRS		dB		
EPRE ratio of PDSCH_DMRS to SSS		dB		
EPRE ratio of PDSCH to PDSCH_DMRS		dB		
ss-PBCH-BlockPower		dBm/ SCS	+20 +Δ_{UL}	As defined in TS 38.331 [2]. Δ_{UL} is derived from the uplink calibration process Note 3
Configured UE transmitted power ($P_{CMAX,\ f,\ c}$)		dBm	maximum value configurable for certain power class	As defined in clause 6.2.4 in TS 38.101-2 [19]
MsgA Configuration			FR2 MsgA configuration 1	As defined in A.3.20.3, with exceptions as defined below
msgA-RSRP-ThresholdSSB		dBm	RSRP_69 +Δ_{DL}	RSRP_69 corresponds to -88dBm. Δ_{DL} is derived from the downlink calibration process Note 4
preambleReceivedTargetPower		dBm	-100	As defined in TS 38.331 [2]

Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.

Note 2: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.

Note 3: The Δ_{UL} value is calculated as -ROUND(PMsgA0 -1), where PMsgA0 is the measured first MsgA PRACH power with -80.6dBm/SCS applied, *msgA-PreambleReceivedTargetPower* = -100dBm and *ss-PBCH-BlockPower* = 20dBm. These values are used during the uplink calibration process carried out before the test case is run, with the UE configured to send MsgA.

Note 4: The Δ_{DL} value is calculated as (RSRP_$_{REP}$ – RSRP_76), where RSRP_$_{REP}$ is the SS-RSRP Reported value in Table 10.1.6.1-1 with -80.6dBm/SCS applied. These values are used during the downlink calibration process carried out before the test case is run, with the UE configured to report SS-RSRP. For a Reported value RSRP_x, x is treated as a positive integer value.

Table A.7.3.2.2.3.1-3: OTA-related test parameters for 2-step RA type contention based random access test in FR2 for NR Standalone

Parameter		Unit	Test-1	Comments
AoA setup			Setup 2b	As defined in A.3.15.1
Assumption for UE beams Note 2			Rough	
SSB with index 0	Es Note1	dBm/SCS	-80.6	Power of SSB with index 0 is set to be above configured *msgA-RSRP-ThresholdSSB*
	SSB_RP	dBm/SCS	-80.6	
	Es/Iot_{BB}	dB	21.09	
	Io	dBm/95.04 MHz	-56.01	Io in symbols containing SSB index 0
SSB with index 1	Es Note1	dBm/SCS	-95.0	Power of SSB with index 1 is set to be below configured *msgA-RSRP-ThresholdSSB*
	SSB_RP	dBm/SCS	-95.0	
	Es/Iot_{BB}	dB	6.69	

	Io	dBm/95.04 MHz	-70.41	Io in symbols containing SSB index 1
Propagation Condition		-	AWGN	
Note 1: No articial noise is applied in this test. Note 2: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.7.3.2.2.3.2 Test Requirements

Contention based random access is triggered by *not* explicitly assigning a random access preamble via dedicated signalling in the downlink.

A.7.3.2.2.3.2.1 MsgA Transmission

To test the UE behavior specified in Clause 6.2.2.3.1.1 the System Simulator shall receive the MsgA with a preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SS-RSRP above the configured *msgA-RSRP-ThresholdSSB.*

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first MsgA preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.7.3.2.2.3.2.2 MsgB Reception

To test the UE behavior specified in Clause 6.2.2.3.1.2 the System Simulator shall transmit a MsgB containing a fallbackRAR message and a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 3 preambles have been received by the System Simulator. In response to the first 2 preambles, the System Simulator shall transmit a MsgB *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for MsgB(s) and shall transmit the msg3 if the MsgB with a fallbackRAR contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit MsgA with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires if all received MsgB's contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first MsgA PRACH shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.7.3.2.2.3.2.3 No MsgB Reception

To test the UE behavior specified in clause 6.2.2.3.1.3 the System Simulator shall transmit a MsgB containing a fallbackRAR message and Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 3 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 2 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires if no MsgB is received within the MsgB Response window.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first MsgA PRACH shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.7.3.2.2.4 2-step RA type n on-contention based random access test in FR2 for NR Standalone

A.7.3.2.2.4.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the MsgA PRACH, MsgA PUSCH power settings and timing are within specified limits. This test will verify the requirements in Clause 6.2.2.3 and Clause 7.1.2 in an AWGN model.

For this test one cell is used, with the configuration of Cell 1 configured as PCell or SCell in FR2. Supported test parameters are shown in Table A.7.3.2.2.4.1-1. UE capable of SA with PCell or SCell in FR2 needs to be tested by using the parameters in Table A.7.3.2.2.4.1-2 and Table A.7.3.2.2.4.1-3.

Table A.7.3.2.2.4.1-1: Supported test configurations for non-contention based random access test for 2-step RA type in FR2 for NR Standalone

Config	Description
1	NR PSCell/SCell 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.3.2.2.4.1-2: General test parameters for non-contention based random access test for 2-step RA type in FR2 for NR Standalone

Parameter		Unit	Test-1	Comments
SSB Configuration	Config 1		SSB.1 FR2	As defined in A.3.10
Duplex Mode for Cell 2	Config 1		TDD	
TDD Configuration	Config 1		TDDConf.3.1	
$BW_{channel}$	Config 1	MHz	100: $N_{RB,c}$ = 24	
OCNG Pattern Note 1			OP.3	As defined in A.3.2.1.
PDSCH Reference Channel Note 2	Config 1		SR3.1 TDD	As defined in A.3.1.1.
NR RF Channel Number			1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH_DMRS to SSS		dB		
EPRE ratio of PBCH to PBCH_DMRS		dB		
EPRE ratio of PDCCH_DMRS to SSS		dB		
EPRE ratio of PDCCH to PDCCH_DMRS		dB		
EPRE ratio of PDSCH_DMRS to SSS		dB		
EPRE ratio of PDSCH to PDSCH_DMRS		dB		
ss-PBCH-BlockPower		dBm/ SCS	+20 +Δ_{UL}	As defined in TS 38.331 [2]. Δ_{UL} is derived from the uplink

			calibration process Note 3
Configured UE transmitted power ($P_{CMAX,f,c}$)	dBm	maximum value configurable for certain power class	As defined in clause 6.2.4 in TS 38.101-2 [19]
MsgA Configuration		FR2 MsgA configuration 2	As defined in A.3.20.3, with exceptions as defined below.
msgA-RSRP-ThresholdSSB	dBm	RSRP_69 +Δ_{DL}	RSRP_69 corresponds to -88dBm. Δ_{DL} is derived from the downlink calibration process Note 4
msgA-PreambleReceivedTargetPower	dBm	-100	As defined in TS 38.331 [2]

Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.
Note 2: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.
Note 3: The Δ_{UL} value is calculated as -ROUND(P_{MsgA0} -1), where P_{MsgA0} is the measured first MsgA PRACH power with -80.6dBm/SCS applied, *msgA-PreambleReceivedTargetPower* = -100dBm and *ss-PBCH-BlockPower* = 20dBm. These values are used during the uplink calibration process carried out before the test case is run, with the UE configured to send MsgA.
Note 4: The Δ_{DL} value is calculated as (RSRP_$_{REP}$ – RSRP_76), where RSRP_$_{REP}$ is the SS-RSRP Reported value in Table 10.1.6.1-1 with -80.6dBm/SCS applied. These values are used during the downlink calibration process carried out before the test case is run, with the UE configured to report SS-RSRP. For a Reported value RSRP_x, x is treated as a positive integer value.

Table A.7.3.2.2.4.1-3: OTA-related test parameters for non-contention based random access test for 2-step RA type in FR2 for NR Standalone

Parameter		Unit	Test-1	Comments
AoA setup			Setup 1	As defined in A.3.15.1
Assumption for UE beams Note 2			Rough	
SSB with index 0	Es Note1	dBm/SCS	-80.6	Power of SSB with index 0 is set to be above configured *msgA-RSRP-ThresholdSSB*
	SSB_RP	dBm/SCS	-80.6	
	Es/Iot_{BB}	dB	21.09	
	Io	dBm/95.04 MHz	-56.01	Io in symbols containing SSB index 0
SSB with index 1	Es Note1	dBm/SCS	-95.0	Power of SSB with index 1 is set to be below configured *msgA-RSRP-ThresholdSSB*
	SSB_RP	dBm/SCS	-95.0	
	Es/Iot_{BB}	dB	6.69	
	Io	dBm/95.04 MHz	-70.41	Io in symbols containing SSB index 1
Propagation Condition		-	AWGN	

Note 1: No artificial noise is applied in this test.
Note 2: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.3.2.2.4.2 Test Requirements

Non-Contention based random access is triggered by explicitly assigning a random access preamble via dedicated signalling in the downlink. In the test, the non-contention based random access procedure is not initialized for Other SI requested from UE or beam failure recovery.

A.7.3.2.2.4.2.1 MsgA Transmission

In Test-1, to test the UE behavior specified in Clause 6.2.2.3.2.1 for MsgA transmission, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs configured, the System Simulator shall receive the MsgA which has the Preamble Index associated with the SSB with index 0.

In addition, the System Simulator shall receive the MsgA on the PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0, and the selected PRACH occasion shall belongs to the PRACH occasions permitted by the restrictions given first by the *msgA-SSB-SharedRO-MaskIndex* if configured, or next by the *ra-ssb-OccasionMaskIndex* if configured.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.7.3.2.2.4.2.2 MsgB Reception

To test the UE behavior specified in Clause 6.2.2.3.2.2 the System Simulator shall transmit a MsgB containing a successRAR MAC subPDU corresponding to the transmitted Random Access Preamble after 3 MsgA transmissions have been received by the System Simulator. In response to the first 2 preambles, the System Simulator shall transmit a MsgB *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for MsgB if the MsgB contains a successRAR MAC subPDU corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA transmission power if all received Random Access Response Reception has not been considered as successful.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.7.3.2.2.4.2.3 No MsgB Reception

To test the UE behavior specified in clause 6.2.2.3.2.3 the System Simulator shall transmit a MsgB corresponding to the transmitted Random Access Preamble after 3 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 2 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA transmission power when the backoff time expires if no MsgB is received within the MsgB Response window configured in *RACH-ConfigGenericTwoStepRA.*

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.7.3.2.3 SA: RRC Connection Release with Redirection

A.7.3.2.3.1 Redirection from NR in FR2 to NR in FR2

A.7.3.2.3.1.1 Test Purpose and Environment

This test is to verify RRC connection release with redirection from NR to NR requirements specified in clause 6.2.3.2.1.

A.7.3.2.3.1.2 Test Parameters

Supported test configurations are shown in table A.7.3.2.3.1.2-1. The time delay is tested by using the parameters in table A.7.3.2.3.1.2-2, and A.7.3.2.3.1.2-3.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. The *RRCRelease* message shall be sent to the UE during period T1 and the start of T2 is the instant when the last TTI containing the RRC message is sent to the UE. Prior to time duration T2, the UE shall not have any timing information of Cell 2. Cell 2 is powered up at the beginning of the T2.

Table A.7.3.2.3.1.2-1: Redirection from NR to NR test configurations

Config	Description
1	Source cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.3.2.3.1.2-2: General test parameters for Redirection from NR to NR test case

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	3.2	

Table A.7.3.2.3.1.2-3: Cell specific test parameters for Redirection from NR to NR test case

Parameter	Unit	Cell 1		Cell 2	
		T1	T2	T1	T2
Assumption for UE beams[Note 6]		Rough		Rough	
AoA setup		Setup 1as defined in A.3.15			
NR RF Channel Number		1		2	
Duplex mode		TDD			
TDD configuration		TDDConf.3.1			
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66			
BWP BW	MHz	100: $N_{RB,c}$ = 66			
Data RBs allocated		66			
DRx Cycle	ms	Not Applicable			
PDSCH Reference measurement channel		SR3.1 TDD			
RMSI CORESET Reference Channel		CR3.1 TDD			
Control Channel RMC		CCR.3.1 TDD			
OCNG Patterns		O P. 1			

SMTC configuration			SMTC.1 FR2			
SSB Configuration			SSB.3 FR2			
PDSCH/PDCCH subcarrier spacing		kHz	120 kHz			
PUCCH/PUSCH subcarrier spacing		kHz	120 kHz			
PRACH configuration			FR2 PRACH configuration 1			
TRS configuration			TRS.2.1 TDD			
PDSCH/PDCCH TCI state			TCI.State.2			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-104.7		-104.7	
N_{oc} Note2		dBm/SCS	-95.7		-95.7	
$\hat{E}_s/I_{ot}$		dB	5	5	-Infinity	5
$\hat{E}_s/N_{oc}$		dB	5	5	-Infinity	5
Io Note3		dBm/BW	-60.5	-60.5	-66.7	-60.5
Propagation condition		-	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.3.2.3.1.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 3160 ms from the beginning of time period T2.

The rate of correct RRC connection release redirection to NR observed during repeated tests shall be at least 90%.

NOTE: The redirection delay can be expressed as:

$$T_{connection_release_redirect_NR} = T_{RRC_procedure_delay} + T_{identify\text{-}NR} + T_{SI\text{-}NR} + T_{RACH},$$

where:

$T_{RRC_procedure_delay}$ = 110 ms in the test.

$T_{identify\text{-}NR}$ = 1760 ms in the test.

T_{SI-NR} = 1280 ms, it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target NR cell.

T_{RACH} = 10 ms in the test.

This gives a total of 3160 ms.

A.7.3.3 Conditional Handover

A.7.3.3.1 Intra-frequency conditional handover from FR2 to FR2

A.7.3.3.1.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR2-NR FR2 intra frequency conditional handover requirements specified in clause 6.1.4.4.

A.7.3.3.1.2 Test Parameters

Supported test configurations are shown in table A.7.3.3.2.2-1. Both handover delay and interruption length are tested by using the parameters in table A.7.3.3.2.2-2, and A.7.3.3.2.2-3.

The test scenario comprises of two cells. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. NR shall configure a condition implying handover to cell 2 during T1, at a time earlier than T_{RRC} before the beginning of T2. Starting T2, cell 2 becomes detectable.

Table A.7.3.3.1.2-1: Intra-frequency conditional handover from FR2 to FR2 test configurations

Config	Description
1	Source cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.3.3.1.2-2: General test parameters for conditional Intra-frequency handover from FR2 to FR2

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
A3-Offset for condition		dBm	-1	Trigger HO to cell which may be measured as -1dB relative to cell 1. Actual SS-RSRP is 5dB stronger.
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	≤2	

Table A.7.3.3.1.2-3: Cell specific test parameters for NR FR2-FR2 conditional Intra frequency handover test case

Parameter	Unit	Cell 1		Cell 2	
		T1	T2	T1	T2
NR RF Channel Number		1		1	

AoA setup			Setup 1 as defined in A.3.15			
Assumption for UE beams[Note 6]			Rough			
Duplex mode			TDD			
TDD configuration			TDDConf.3.1			
$BW_{channel}$		MHz	100: $N_{RB,c}$ = 66			
BWP BW		MHz	100: $N_{RB,c}$ = 66			
DRx Cycle		ms	Not Applicable			
PDSCH Reference measurement channel			SR3.1 TDD			
CORESET Reference Channel			CR3.1 TDD			
OCNG Patterns			OCNG pattern 1			
SMTC Configuration			SMTC pattern 1			
SSB Configuration			SSB.1 FR2			
PDSCH/PDCCH subcarrier spacing		kHz	120 kHz			
PUCCH/PUSCH subcarrier spacing		kHz	120 kHz			
PRACH configuration			FR2 PRACH configuration 1			
TRS configuration			TRS.2.1 TDD			
TCI configuration			CSI-RS.Config.0			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} [Note2]		dBm/15kHz	-104.7		-104.7	
N_{oc} [Note2]	Config 1	dBm/SCS	-95.7		-95.7	
$\hat{E}_s/I_{otBB}$ [Note 8]		dB	5.03	-5.41	-Infinity	3.81
$\hat{E}_s/N_{oc}$		dB	6	6	-Infinity	11
Io[Note3]	Config 1	dBm/BW	-59.7	-54.2	-59.7	-54.2
Propagation condition		-	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone

Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone

Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Note 7: Es/Iot, SSB_RP and Io levels have been derived from other parameters for infomation purposes. They are not settable parameters themseleves.

Note 8: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated REFSENS requirement in TS 38.101-2 [19] clause 7.3.2, and an allowance of 1dB for UE multi-band relaxation factor Δ_{MBS} specified in TS 38.101-2 [19] Table 6.2.1.3-4.

A.7.3.3.1.2.3 Test Requirements

T_{RRC} + T_{Event_DU} occurs during T1 as the handover condition becomes satisfied at the start of T2. The test shall verify that there are no interruptions during T1.

The UE shall start to transmit the PRACH to Cell 2 less than $T_{measure}$ + $T_{interrupt}$ + $T_{CHO_execution}$ =1600+62+10=1672 ms (power class 1) or 1080+62+10 =1152 (PC2/3/4) 62 ms=1152 ms (power classes 2,3 and 4) from the start of T2 and the interruption during T2 shall not exceeed $T_{interrupt}$=$T_{processing}$ + T_{IU} + T_{Δ} + T_{margin} =40+20+2 = 62ms excluding any transmissions which do not occur due to scheduling restrictions.

A.7.3.3.2 Inter-frequency conditional handover from FR2 to FR2; unknown target cell

A.7.3.3.2.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR2-NR FR2 inter frequency conditional handover requirements specified in clause 6.1.4.4.

A.7.3.3.2.2 Test Parameters

Supported test configurations are shown in table A.7.3.3.3.2-1. Both conditional handover delay and interruption length are tested by using the parameters in table A.7.3.3.3.2-2, and A.7.3.3.3.2-3.

The test scenario comprises of two carriers and one cell on each carrier. Gap pattern ID gp0 is configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. NR shall configure a condition implying handover to cell 2 during T1, at a time earlier than T_{RRC} before the beginning of T2. At the start of T2, cell 2 becomes detectable and meets the handover condition.

Table A.7.3.3.2.2-1: Inter-frequency conditional handover from FR2 to FR2 test configurations

Config	Description
1	Source cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.3.3.2.2-2: General test parameters Inter-frequency conditional handover from FR2 to FR2

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
A3-Offset for handovercondition		dB	FFS	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	≤7	

Table A.7.3.3.2.2-3: Cell specific test parameters for NR FR2-FR2 Inter frequency conditional handover test case

Parameter	Unit	Cell 1		Cell 2	
		T1	T2	T1	T2
NR RF Channel Number		1		2	

AoA setup			Setup 1 as defined in A.3.15			
Assumption for UE beams[Note 6]			Rough			
Duplex mode			TDD			
TDD configuration			TDDConf.3.1			
$BW_{channel}$		MHz	100: $N_{RB,c}$ = 66			
BWP BW		MHz	100: $N_{RB,c}$ = 66			
DRx Cycle		ms	Not Applicable			
Gap pattern ID			gp0			
PDSCH Reference measurement channel			SR3.1 TDD			
CORESET Reference Channel			CR3.1 TDD			
OCNG Patterns			OCNG pattern 1			
SMTC Configuration			SMTC pattern 1			
SSB Configuration			SSB.1 FR2			
PDSCH/PDCCH subcarrier spacing		kHz	120 kHz			
PUCCH/PUSCH subcarrier spacing		kHz	120 kHz			
PRACH configuration			FR2 PRACH configuration 1			
TRS configuration			TRS.2.1 TDD			
TCI configuration			CSI-RS.Config.0			
BWP configuraiton	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-104.7		-104.7	
N_{oc} Note2	Config 1,2	dBm/SCS	-95.7		-95.7	
	Config 3		-95.7		-95.7	
$\hat{E}_s / I_{ot}$		dB	5	5	-Infinity	5
$\hat{E}_s / N_{oc}$		dB	5	5	-Infinity	5
Io[Note3]	Config 1,2	dBm/BW	-60.5	-60.5	-66.7	-60.5
	Config 3	dBm/BW	-60.5	-60.5	-66.7	-60.5
Propagation condition		-	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone

Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone

Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.3.3.2.3 Test Requirements

T_{RRC} + T_{Event_DU} occurs during T1 as the handover condition becomes satisfied at the start of T2. The test shall verify that there are no interruptions during T1.

The UE shall start to transmit the PRACH to Cell 2 less than $T_{measure}$ + $T_{interrupt}$ + $T_{CHO_execution}$ = 6720+62+10ms=6792 ms (power class 1) or 4160+62+10ms =4232ms (power classes 2,3 and 4) from the start of T2 and the interruption during T2 shall not exceeed $T_{interrupt}$=$T_{processing}$ + T_{IU} + T_{Δ} + T_{margin} =40+20+2 = 62ms excluding any transmissions which do not occur due to scheduling restrictions. excluding any transmissions which do not occur due to scheduling restrictions.

A.7.4 Timing

A.7.4.1 UE transmit timing

A.7.4.1.1 NR UE Transmit Timing Test for FR2

A.7.4.1.1.1 Test Purpose and environment

The purpose of this test is to verify that the UE can follow frame timing change of the connected gNodeb and that the UE initial transmit timing accuracy, maximum amount of timing change in one adjustment, minimum and maximum adjustment rate are within the specified limits. *highSpeedMeasFlagFR2-r17* is broadcast to UE supporting power class 6. This test will verify the requirements in clause 7.1.2.

Supported test configurations are shown in Table 7.4.1.1.1-1.

Table A.7.4.1.1.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	NR TDD, SSB SCS 240 kHz, data SCS 120 kHz, BW 100 MHz

For this test a single NR cell is used. Tables A.7.4.1.1.1-2 and A.7.4.1.1.1-2A define the parameters to be configured and strength of the transmitted signals. The transmit timing is verified by the UE transmitting SRS using the configuration defined in Table A.7.4.1.1.1-3.

Table A.7.4.1.1.1-2: Cell Specific Test Parameters for UL Transmit Timing test

Parameter	Unit	Config	Test1	Test2
SSB ARFCN		1	Freq1	Freq1
TDD configuration		1	TDDConf.3.1	
$BW_{channel}$	MHz	1	100: $N_{RB,c}$ = 66	
Data RBs allocated		1	66	
Initial BWP Configuration		1	DLBWP.0.1 ULBWP.0.1	
Dedicated BWP Configuration		1	DLBWP.1.1 ULBWP.1.1	
TRS Configuration		1	TRS.2.1 TDD	
PDSCH/PDCCH TCI state		1	TCI.State.2	
DRx Cycle	ms	1	N/A	DRX.8[Note5]
PDSCH Reference measurement channel		1	SR.3. 3 TDD	
RMSI CORESET Reference Channel		1	CR.3. 2 TDD	

Dedicated CORESET Reference Channel		1	CCR.3. 7 TDD	
OCNG Patterns		1	OP.1	
SSB Configuration		1	SSB.4 FR2	
SMTC Configuration		1	SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	1	120	
EPRE ratio of PSS to SSS	dB	1	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
Propagation condition		1	AWGN	
SRS Config		1	SRSConf.1Note6	SRSConf.2Note6

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: Void
Note 4: Void
Note 5: DRx related parameters are given in Table A.3.3.8-1
Note 6: SRS configs are given in Table A.7.4.1.1.1-3

Table A.7.4.1.1.1-2A: OTA related test parameters

Parameter	Unit	Test 1	Test 2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1	
Assumption for UE beamsNote 6		Fine	
N_{oc} Note1	dBm/15kHzNote4	-112	
N_{oc} Note1	dBm/SCSNote3	-100	
$\hat{E}_s / N_{oc}$	dB	4	
SS-RSRPNote2	dBm/SCS Note4	-96	
$\hat{E}_s / I_{ot}$	dB	4	
IoNote2	dBm/95.04 MHz Note4	-68.5	

Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2:	SS B_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	Void
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5:	As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Table A.7.4.1.1.1-3: SRS Configuration for Timing Accuracy Test

	Field	SRSConf.1	SRSConf.2	Comments
SRS-ResourceSet	srs-ResourceSetId	0	0	
	srs-ResourceIdList	0	0	
	resourceType	Periodic	Periodic	
	Usage	Codebook	Codebook	
SRS-Resource	SRS-ResourceId	0	0	
	nrofSRS-Ports	Port1	Port1	
	transmissionComb	n2	n2	
	combOffset-n2	0	0	
	cyclicShift-n2	0	0	
	resourceMapping startPosition	0	0	
	resourceMapping nrofSymbols	n1	n1	
	resourceMapping repetitionFactor	n1	n1	
	freqDomainPosition	0	0	
	freqDomainShift	0	0	
	freqHopping c-SRS	17	17	Matches $N_{RB,c}$
	freqHopping b-SRS	0	0	
	freqHopping b-hop	0	0	
	groupOrSequenceHopping	Neither	Neither	
	resourceType	Periodic	Periodic	
	periodicityAndOffset-p	sl1, 0	sl2560, 4	Offset to align with DRx periodicity
	sequenceId	0	0	Any 10 bit number

Table A.7.4.1.1.1-4: Void

A.7.4.1.1.2 Test requirements

The test sequence shall be carried out in RRC_CONNECTED for every test case.

Following will be the test sequence for this test:

1) Setup NR PCell according to parameters given in Table A.7.4.1.1.1-1.

2) After connection set up with the cell, the test equipment will verify that the timing of the NR cell is within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first detected path of DL SSB.

a. The N_{TA} offset value (in T_c units) is 13792

b. The T_e values depend on the DL and UL SCS for which the test is being run and are given in Table 7.1.2-1

3) The test system shall adjust the timing of the DL path by values given in Table A.7.4.1.1.2-1

Table A.7.4.1.1.2-1 Adjustment Value for DL Timing

SCS of SSB signals (kHz)	Adjustment Value	
	Test1	Test2
240	$+8*64T_c$	$+4*64T_c$

4) The test system shall verify that the adjustment step size and the adjustment rate shall be according to requirements specified in clause 7.1.2 Table 7.1.2.1-1 until the UE transmit timing offset is within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ respective to the first path (in time) of DL SSB used by the UE to determine downlink timing is received from the reference cell at the UE antenna. Skip this step for test 2 with DRX confiured.

5) The test system shall verify that the UE transmit timing offset stays within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first path (in time) of DL SSB used by the UE to determine downlink timing is received from the reference cell at the UE antenna. For Test 2 the UE transmit timing offset shall be verified for the first transmission in the DRX cycle immediately after DL timing adjustment.

A.7.4.1.2 NR UE Transmit Timing Test for FR2-2

A.7.4.1.2.1 Test Purpose and environment

The purpose of this test is to verify that the UE can follow frame timing change of the connected gNodeb and that the UE initial transmit timing accuracy, maximum amount of timing change in one adjustment, minimum and maximum adjustment rate are within the specified limits. This test will verify the requirements in clause 7.1.2.

Supported test configurations are shown in Table A.7.4.1.2.1-1.

Table A.7.4.1.2.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	NR TDD, SSB SCS 120 kHz, data SCS 120 kHz, BW 100 MHz
2	NR TDD, SSB SCS 480 kHz, data SCS 480 kHz, BW 400 MHz
3	NR TDD, SSB SCS 960 kHz, data SCS 960 kHz, BW 400 MHz
Note: The UE is required to be tested in the configuration with the largest supported SCS	

For this test a single NR cell is used. Tables A.7.4.1.2.1-2 and A.7.4.1.2.1-2A define the parameters to be configured and strength of the transmitted signals. The transmit timing is verified by the UE transmitting SRS using the configuration defined in Table A.7.4.1.2.1-3.

Table A.7.4.1.2.1-2: Cell Specific Test Parameters for UL Transmit Timing test

Parameter	Unit	Config	Test1	Test2
SSB ARFCN		1	Freq1	Freq1
TDD configuration		1	TBD	
		2	TBD	
		3	TBD	
$BW_{channel}$	MHz	1	100: $N_{RB,c}$ = 66	
		2	400: $N_{RB,c}$ = 66	

		3	400: $N_{RB,c}$ = 33	
Data RBs allocated		1	66	
		2	66	
		3	33	
Initial BWP Configuration		1,2,3	DLBWP.0.1 ULBWP.0.1	
Dedicated BWP Configuration		1,2,3	DLBWP.1.1 ULBWP.1.1	
TRS Configuration		1	TRS.2.1 TDD	
		2	TBD	
		3	TBD	
PDSCH/PDCCH TCI state		1,2,3	TCI.State.2	
DRx Cycle	ms	1,2,3	N/A	DRX.8[Note5]
PDSCH Reference measurement channel		1	SR.3. 3 TDD	
		2	TBD	
		3	TBD	
RMSI CORESET Reference Channel		1	CR.3. 2 TDD	
		2	TBD	
		3	TBD	
Dedicated CORESET Reference Channel		1	CCR.3. 7 TDD	
		2	TBD	
		3	TBD	
OCNG Patterns		1,2,3	OP.1	
SSB Configuration		1	SSB.4 FR2	
		2	TBD	
		3	TBD	
SMTC Configuration		1,2,3	SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	1	120	
		2	480	
		3	960	
EPRE ratio of PSS to SSS	dB	1	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
Propagation condition		1	AWGN	
SRS Config		1	SRSConf.1[Note6]	SRSConf.2[Note6]

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: Void
Note 4: Void
Note 5: DRx related parameters are given in Table A.3.3.8-1
Note 6: SRS configs are given in Table A.7.4.1.2.1-3

Table A.7.4.1.2.1-2A: OTA related test parameters

Parameter	Unit	Config	Test 1	Test 2
Angle of arrival configuration		1,2,3	Setup 1 according to clause A.3.15.1	
Assumption for UE beams[Note 6]		1,2,3	Fine	
N_{oc} [Note1]	dBm/15kHz[Note4]		-112	
N_{oc} [Note1]	dBm/SCS[Note3]	1	-100	
		2	-94	
		3	-91	
$\hat{E}_s / N_{oc}$	dB	1,2,3	4	
SS-RSRP[Note2]	dBm/SCS [Note4]	1	-96	
		2	-90	
		3	-87	
$\hat{E}_s / I_{ot}$	dB	1,2,3	4	
Io[Note2]	dBm/95.04 MHz [Note4]	1	-68.5	
	dBm/380.16 MHz [Note4]	2,3	-62.5	

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 2: SS B_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 3: Void

Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone

Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone

Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Table A.7.4.1.2.1-3: SRS Configuration for Timing Accuracy Test

	Field	SRSConf.1	SRSConf.2	Comments
SRS-ResourceSet	srs-ResourceSetId	0	0	
	srs-ResourceIdList	0	0	
	resourceType	Periodic	Periodic	
	Usage	Codebook	Codebook	
SRS-Resource	SRS-ResourceId	0	0	
	nrofSRS-Ports	Port1	Port1	
	transmissionComb	n2	n2	
	combOffset-n2	0	0	
	cyclicShift-n2	0	0	
	resourceMapping startPosition	0	0	
	resourceMapping nrofSymbols	n1	n1	
	resourceMapping repetitionFactor	n1	n1	
	freqDomainPosition	0	0	
	freqDomainShift	0	0	
	freqHopping c-SRS	17	17	Matches $N_{RB,c}$
	freqHopping b-SRS	0	0	
	freqHopping b-hop	0	0	
	groupOrSequenceHopping	Neither	Neither	

	resourceType	Periodic	Periodic	
	periodicityAndOffset-p	sl1, 0	sl2560, 4	Offset to align with DRx periodicity
	sequenceId	0	0	Any 10 bit number

A.7.4.1.2.2 Test requirements

The test sequence shall be carried out in RRC_CONNECTED for every test case.

Following will be the test sequence for this test:

1) Setup NR PCell according to parameters given in Table A.7.4.1.2.2-1.
2) After connection set up with the cell, the test equipment will verify that the timing of the NR cell is within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first detected path of DL SSB.
   a. The N_{TA} offset value (in T_c units) is 13792
   b. The T_e values depend on the DL and UL SCS for which the test is being run and are given in Table 7.1.2-1
3) The test system shall adjust the timing of the DL path by values given in Table A.7.4.1.2.2-1

Table A.7.4.1.2.2-1 Adjustment Value for DL Timing

SCS of SSB signals (kHz)	Adjustment Value	
	Test1	Test2
120	$+8*64T_c$	$+4*64T_c$
480	$+4*64T_c$	$+2*64T_c$
960	$+4*64T_c$	$+2*64T_c$

4) The test system shall verify that the adjustment step size and the adjustment rate shall be according to requirements specified in clause 7.1.2 Table 7.1.2.1-1 until the UE transmit timing offset is within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ respective to the first detected path (in time) of DL SSB. Skip this step for test 2 with DRX configured.
5) The test system shall verify that the UE transmit timing offset stays within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first detected path of DL SSB. For Test 2 the UE transmit timing offset shall be verified for the first transmission in the DRX cycle immediately after DL timing adjustment.

The rate of correct transmit timing observed during repeated tests shall be at least 90%.

A.7.4.2 UE timer accuracy

A.7.4.3 Timing advance

A.7.4.3.1 SA FR2 timing advance adjustment accuracy

A.7.4.3.1.1 Test Purpose and Environment

The purpose of the test is to verify UE Timing Advance adjustment delay and accuracy requirement defined in clause 7.3.

A.7.4.3.1.2 Test Parameters

Supported test configurations are shown in table A.7.4.3.1.2-1. Both timing advance adjustment delay and accuracy are tested by using the parameters in table A.7.4.3.1.2-2, A.7.4.3.1.2-3 and A.7.4.3.1.2-4.

In all test cases, single cell is used. Each test consists of two successive time periods, with time duration of T1 and T2 respectively. In each time period, timing advance commands are sent to the UE and Sounding Reference Signals (SRS), as specified in table A.7.4.3.1.2-3, are sent from the UE and received by the test equipment. By measuring the reception of the SRS, the transmit timing, and hence the timing advance adjustment accuracy, can be measured.

During time period T1, the test equipment shall send one message with a Timing Advance Command MAC Control Element, as specified in clause 6.1.3.4 in TS 38.321 [7]. The Timing Advance Command value shall be set to 31, which according to clause 4.2 in TS 38.213 [3] results in zero adjustment of the Timing Advance. In this way, a reference value for the timing advance used by the UE is established.

During time period T2, the test equipment shall send a sequence of messages with Timing Advance Command MAC Control Elements, with Timing Advance Command value specified in table A.7.4.3.1.2-2. This value shall result in changes of the timing advance used by the UE, and the accuracy of the change shall then be measured, using the SRS sent from the UE.

As specified in Clause 7.3.2.1, the UE adjusts its uplink timing at slot n+k+1 for a timing advance command received in slot n. This delay must be taken into account when measuring the timing advance adjustment accuracy, via the SRS sent from the UE.

The UE Time Alignment Timer, described in Clause 5.2 in TS 38.321 [7], shall be configured so that it does not expire in the duration of the test.

Table A.7.4.3.1.2-1: Timing advance supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.4.3.1.2-2: General test parameters for timing advance

Parameter	Unit	Value	Comment
RF channel number		1	
Initial DL BWP		DLBWP.0.1	As specified in Table A.3.9.2.1-1
Dedicated DL BWP		DLBWP.1.1	As specified in Table A.3.9.2.2-1
Initial UL BWP		ULBWP.0.1	As specified in Table A.3.9.3.1-1
Dedicated UL BWP		ULBWP.1.1	As specified in Table A.3.9.3.2-1
Timing Advance Command (T_A) value during T1		31	$N_{TA_new} = N_{TA_old}$ for the purpose of establishing a reference value from which the timing advance adjustment accuracy can be measured during T2
Timing Advance Command (T_A) value during T2		39	*For 120 kHz SCS* $N_{TA_new} = N_{TA_old} + 1024*T_c$ (based on equation in clause 4.2 of TS 38.213 [3])
T1	s	5	
T2	s	5	

Table A.7.4.3.1.2-3: Cell specific test parameters for timing advance

Parameter	Unit	Test1	
		T1	T2
Duplex mode		TDD	
TDD configuration		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66	
BWP BW	MHz	100: $N_{RB,c}$ = 66	

DRx Cycle	ms	Not Applicable
PDSCH Reference measurement channel		SR.3.1 TDD
CORESET Reference Channel		CR.3.1 TDD
OCNG Patterns		OCNG pattern 1
TRS configuration		TRS.2.1 TDD
PDSCH/PDCCH TCI state		TCI.State.2
SMTC configuration		SMTC.1 FR2
SSB Configuration		SSB.3 FR2
PDSCH/PDCCH subcarrier spacing	kHz	120 kHz
PUCCH/PUSCH subcarrier spacing	kHz	120 kHz
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation condition	-	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone

Table A.7.4.3.1.2-3A: OTA related test parameters

Parameter	Unit	Test 1	
		T1	T2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1	
Assumption for UE beams[Note 6]		Fine	
N_{oc} [Note1]	dBm/15kHz[Note4]	-112	
N_{oc} [Note1]	dBm/SCS[Note3]	-103	
$\hat{E}_s / N_{oc}$	dB	4	
SS-RSRP[Note2]	dBm/SCS [Note4]	-99	
$\hat{E}_s / I_{ot}$	dB	4	
Io[Note2]	dBm/95.04 MHz [Note4]	-68.5	

Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5:	As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Table A.7.4.3.1.2-4: Sounding Reference Symbol Configuration for timing advance

Field	Value	Comment
c-SRS	16	Frequency hopping is disabled
b-SRS	0	
b-hop	0	
freqDomainPosition	0	Frequency domain position of SRS
freqDomainShift	0	
groupOrSequenceHopping	neither	No group or sequence hopping
SRS-PeriodicityAndOffset	sl5=4	Once every 5 slots
pathlossReferenceRS	ssb-Index=0	SSB #0 is used for SRS path loss estimation
usage	Codebook	Codebook based UL transmission
startPosition	0	resourceMapping setting. SRS on last symbol of slot, and 1symbols for SRS without repetition.
nrofSymbols	n1	
repetitionFactor	n1	
combOffset-n2	0	transmissionComb setting
cyclicShift-n2	0	
nrofSRS-Ports	port1	Number of antenna ports used for SRS transmission
Note: For further information see clause 6.3.2 in TS 38.331 [2].		

A.7.4.3.1.3 Test Requirements

The UE shall apply the signalled Timing Advance value to the transmission timing at the designated activation time i.e. *k+1* slots after the reception of the timing advance command, where *k* = 11.

The Timing Advance adjustment accuracy shall be within the limits specified in clause 7.3.2.2.

The rate of correct Timing Advance adjustments observed during repeated tests shall be at least 90%.

A.7.4.3.2 SA FR2-2 timing advance adjustment accuracy

A.7.4.3.2.1 Test Purpose and Environment

The purpose of the test is to verify UE Timing Advance adjustment delay and accuracy requirement defined in clause 7.3.

A.7.4.3.2.2 Test Parameters

Supported test configurations are shown in table A.7.4.3.2.2-1. Both timing advance adjustment delay and accuracy are tested by using the parameters in table A.7.4.3.2.2-2, A.7.4.3.2.2-3 and A.7.4.3.2.2-4.

In all test cases, single cell is used. Each test consists of two successive time periods, with time duration of T1 and T2 respectively. In each time period, timing advance commands are sent to the UE and Sounding Reference Signals (SRS), as specified in table A.7.4.3.2.2-3, are sent from the UE and received by the test equipment. By measuring the reception of the SRS, the transmit timing, and hence the timing advance adjustment accuracy, can be measured.

During time period T1, the test equipment shall send one message with a Timing Advance Command MAC Control Element, as specified in clause 6.1.3.4 in TS 38.321 [7]. The Timing Advance Command value shall be set to 31, which according to clause 4.2 in TS 38.213 [3] results in zero adjustment of the Timing Advance. In this way, a reference value for the timing advance used by the UE is established.

During time period T2, the test equipment shall send a sequence of messages with Timing Advance Command MAC Control Elements, with Timing Advance Command value specified in table A.7.4.3.2.2-2. This value shall result in changes of the timing advance used by the UE, and the accuracy of the change shall then be measured, using the SRS sent from the UE.

As specified in Clause 7.3.2.1, the UE adjusts its uplink timing at slot n+k for a timing advance command received in slot n. This delay must be taken into account when measuring the timing advance adjustment accuracy, via the SRS sent from the UE.

The UE Time Alignment Timer, described in Clause 5.2 in TS 38.321 [7], shall be configured so that it does not expire in the duration of the test.

Table A.7.4.3.2.2-1: Timing advance supported test configurations

Configuration	Description
1	NR TDD, SSB SCS 120 kHz, data SCS 120 kHz, BW 100 MHz
2	NR TDD, SSB SCS 480 kHz, data SCS 480 kHz, BW 400 MHz
3	NR TDD, SSB SCS 960 kHz, data SCS 960 kHz, BW 400 MHz
Note: The UE is required to be tested in the configuration with the largest supported SCS	

Table A.7.4.3.2.2-2: General test parameters for timing advance

Parameter	Unit	Value	Comment
RF channel number		1	
Initial DL BWP		DLBWP.0.1	As specified in Table A.3.9.2.1-1
Dedicated DL BWP		DLBWP.1.1	As specified in Table A.3.9.2.2-1
Initial UL BWP		ULBWP.0.1	As specified in Table A.3.9.3.1-1
Dedicated UL BWP		ULBWP.1.1	As specified in Table A.3.9.3.2-1
Timing Advance Command (T_A) value during T1		31	$N_{TA_new} = N_{TA_old}$ for the purpose of establishing a reference value from which the timing advance adjustment accuracy can be measured during T2
Timing Advance Command (T_A) value during T2		39	*For 120 kHz SCS* $N_{TA_new} = N_{TA_old} + 1024*T_c$ *For 480 kHz SCS* $N_{TA_new} = N_{TA_old} + 256*T_c$ *For 960 kHz SCS* $N_{TA_new} = N_{TA_old} + 128*T_c$ (based on equation in clause 4.2 of TS 38.213 [3])
T1	s	5	
T2	s	5	

Table A.7.4.3.2.2-3: Cell specific test parameters for timing advance

Parameter	Unit	Config	T1	T2
TDD configuration		1	TBD	
		2	TBD	
		3	TBD	
$BW_{channel}$	MHz	1	100: $N_{RB,c}$ = 66	
		2	400: $N_{RB,c}$ = 66	
		3	400: $N_{RB,c}$ = 33	
Data RBs allocated		1	66	
		2	66	
		3	33	
Initial BWP Configuration		1,2,3	DLBWP.0.1 ULBWP.0.1	
Dedicated BWP Configuration		1,2,3	DLBWP.1.1 ULBWP.1.1	
TRS Configuration		1	TRS.2.1 TDD	
		2	TBD	
		3	TBD	
PDSCH/PDCCH TCI state		1,2,3	TCI.State.2	
DRx Cycle	ms	1,2,3	N/A	DRX.8[Note5]
PDSCH Reference measurement channel		1	SR.3. 3 TDD	
		2	TBD	
		3	TBD	
RMSI CORESET Reference Channel		1	CR.3. 2 TDD	
		2	TBD	
		3	TBD	
Dedicated CORESET Reference Channel		1	CCR.3. 7 TDD	
		2	TBD	
		3	TBD	
OCNG Patterns		1,2,3	OP.1	
SSB Configuration		1	SSB.4 FR2	
		2	TBD	
		3	TBD	
SMTC Configuration		1,2,3	SMTC.1	

Table A.7.4.3.2.2-3A: OTA related test parameters

Parameter	Unit	Config	T1	T2
Angle of arrival configuration		1,2,3	Setup 1 according to clause A.3.15.1	
Assumption for UE beams[Note 6]		1,2,3	Fine	
N_{oc} [Note1]	dBm/15kHz[Note4]		-112	
N_{oc} [Note1]	dBm/SCS[Note3]	1	-100	
		2	-94	
		3	-91	
$\hat{E}_s / N_{oc}$	dB	1,2,3	4	
SS-RSRP[Note2]	dBm/SCS [Note4]	1	-96	
		2	-90	
		3	-87	
$\hat{E}_s / I_{ot}$	dB	1,2,3	4	
Io[Note2]	dBm/95.04 MHz [Note4]	1	-68.5	
	dBm/380.16 MHz [Note4]	2,3	-62.5	

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SS B_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: Void
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Table A.7.4.3.2.2-4: Sounding Reference Symbol Configuration for timing advance

Field	Value	Comment
c-SRS	16	Frequency hopping is disabled
b-SRS	0	
b-hop	0	
freqDomainPosition	0	Frequency domain position of SRS
freqDomainShift	0	
groupOrSequenceHopping	neither	No group or sequence hopping
SRS-PeriodicityAndOffset	sl5=0	Once every 5 slots
pathlossReferenceRS	ssb-Index=0	SSB #0 is used for SRS path loss estimation
usage	Codebook	Codebook based UL transmission
startPosition	0	resourceMapping setting. SRS on last symbol of slot, and 1symbols for SRS without repetition.
nrofSymbols	n1	
repetitionFactor	n1	
combOffset-n2	0	transmissionComb setting
cyclicShift-n2	0	
nrofSRS-Ports	port1	Number of antenna ports used for SRS transmission
Note: For further information see clause 6.3.2 in TS 38.331 [2].		

A.7.4.3.2.3 Test Requirements

The UE shall apply the signalled Timing Advance value to the transmission timing at the designated activation time i.e. *k+1* slots after the reception of the timing advance command.

The Timing Advance adjustment accuracy shall be within the limits specified in clause 7.3.2.2.

The rate of correct Timing Advance adjustments observed during repeated tests shall be at least 90%.

A.7.5 Signaling characteristics

A.7.5.1 Radio link Monitoring

In the following clause, any uplink signal transmitted by the UE is used for detecting the In-/Out-of-Sync state of the UE. In terms of measurement, the uplink signal is verified on the basis of the UE output power:

Editor note: The metric for the detection of the UE UL transmitted signal by the TE is FFS.

A.7.5.1.1 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with SSB-based RLM RS in non-DRX mode

A.7.5.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell. This test will partly verify the FR2 radio link monitoring requirements in clause 8.1.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to '*rlf*'. Supported test configurations are shown in table A.7.5.1.1.1-1. The test parameters are given in Tables A.7.5.1.1.1-2, A.7.5.1.1.1-3, and A.7.5.1.1.1-4 below. There is one cell (Cell 1), which is the active NR cell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.7.5.1.1.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states, and Figure A.7.5.1.1.1-2 shows the Time multiplexed downlink transmissions from each Angle of Arrival. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In addition to RLM-RS radio link monitoring using SSB index 0 and SSB index 1, the UE is configured to perform inter-frequency measurements using Gap Pattern ID #0 (40ms) in test 1.

Table A.7.5.1.1.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	TDD, SSB SCS 120 KHz, data SCS 120KHz, BW 100 MHz

Table A.7.5.1.1.1-2: General test parameters for FR2 out-of-sync testing in non-DRX mode

Parameter			Unit	Value
				Test 1
Active PCell				Cell 1
RF Channel Number				1
Duplex mode		Config 1		TDD
$BW_{channel}$		Config 1		100: $N_{RB,c}$ = 66
Data RBs allocated		Config 1		24
DL initial BWP configuration		Config 1		DLBWP.0.1
DL dedicated BWP configuration		Config 1		DLBWP.1.1
UL initial BWP configuration		Config 1		ULBWP.0.1
UL dedicated BWP configuration		Config 1		ULBWP.1.1
TDD Configuration		Config 1		TDDConf.3.1
RMSI CORESET Reference Channel		Config 1		CR.3.1 TDD
Dedicated CORESET Reference Channel		Config 1		CCR.3.4 TDD
SSB Configuration		Config 1		SSB.1 FR2
SMTC Configuration		Config 1		SMTC.1
PDSCH/PDCCH subcarrier spacing		Config 1		120 KHz
PRACH Configuration		Config 1		Table A.3.8.3.1
SSB index assigned as RLM RS		Config 1		0,1
OCNG parameters				OP.5
CP length				Normal
Out of sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	4

	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	4
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
DRX				*OFF*
Gap pattern ID				*gp0*
Layer 3 filtering				*Enabled*
T310 timer			ms	*0*
T311 timer			ms	1000
N310				1
N311				1
CSI-RS for CSI reporting		Config 1		CSI-RS.3.1 TDD
reportConfigType				periodic
reportQuantity				cri-RI-PMI-CQI
CSI reporting periodicity			slot	40
CSI reporting offset			slot	4
TCI states for PDCCH/PDSCH				TCI.State.2
CSI-RS for tracking		Config 1		TRS.2.1 TDD
T1			s	0.2
T2			s	9.68
T3			s	9.68
D1			s	9.64
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.7.5.1.1.1-3: OTA related cell specific test parameters for FR2 (Cell 1) for out-of-sync radio link monitoring tests in non-DRX mode

Parameter		Unit	Test 1					
			T1	T2	T3	T1	T2	T3
AoA setup			Setup 3 defined in A.3.15					
			AoA1			AoA2		
Assumption for UE beams Note 5			Rough			Rough		
EPRE ratio of PDCCH DMRS to SSS		dB	4			Not sent		
EPRE ratio of PDCCH to PDCCH DMRS		dB	0					
EPRE ratio of PBCH DMRS to SSS		dB						
EPRE ratio of PBCH to PBCH DMRS		dB						
EPRE ratio of PSS to SSS		dB						
EPRE ratio of PDSCH DMRS to SSS		dB						
EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
ssb-Index 0 SNR	Config 1	dB	$2^{Note 6}$	$-6^{Note 6}$	-15			
ssb-Index 1 SNR	Config 1		Not sent			$2^{Note 6}$	-15	-15
N_{oc}	Config 1	dBm/ 15kHz	-92.1			-92.1		
Time multiplexing of the downlink transmissions from each AoA			Defined in Figure A.7.5.1.1.1-2					
Propagation condition			TDL-A 30ns 75Hz			TDL-A 30ns 75Hz		

Note 1:	OCNG shall be used such a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 3:	SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 4:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6.
Note 5:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 6:	This value allows up to 1dB degradation from applied SNR to UE baseband

Table A.7.5.1.1.1-4: Measurement gap configuration for out-of-sync tests in non-DRX mode

Field	Test 1
	Value
gapOffset	0

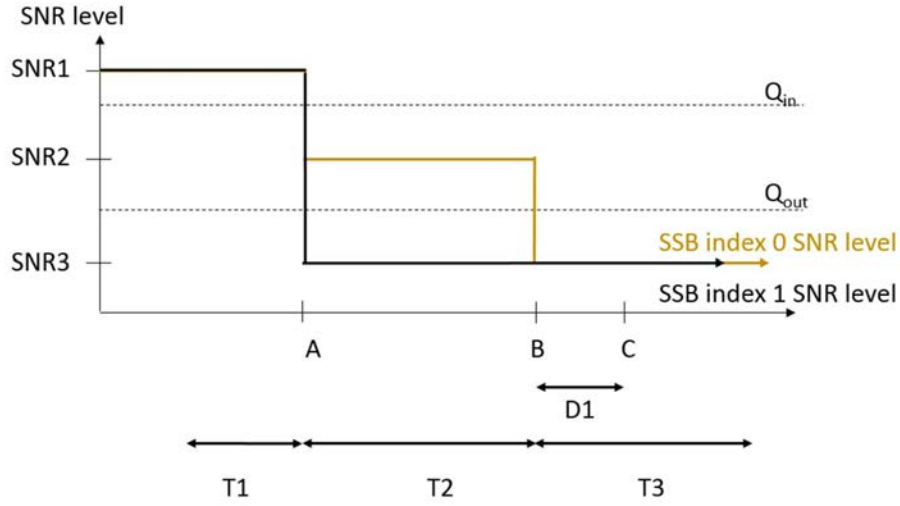

Figure A.7.5.1.1.1-1: SNR variation for out-of-sync testing

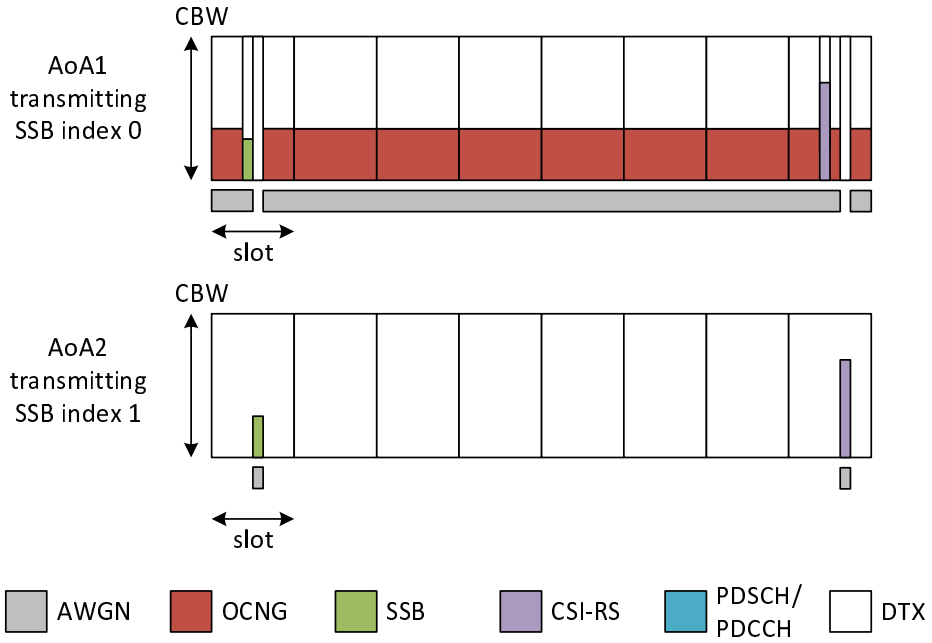

Figure A.7.5.1.1.1-2: Time multiplexed downlink transmissions

A.7.5.1.1.2 Test Requirements

The UE behavior in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.1.2 Radio Link Monitoring In-sync Test for FR2 PCell configured with SSB-based RLM RS in non-DRX mode

A.7.5.1.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell. This test will partly verify the FR2 radio link monitoring requirements in clause 8.1.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to '*rlf*'. Supported test configurations are shown in table A.7.5.1.2.1-1.The test parameters are given in Tables A.7.5.1.2.1-2, and A.7.5.1.2.1-3 below. There is one cell (Cell 1), which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.7.5.1.2.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states, and Figure A.7.5.1.2.1-2 shows the Time multiplexed downlink transmissions from each Angle of Arrival. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms.

Table A.7.5.1.2.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	TDD, SSB SCS 120 KHz, data SCS 120KHz, BW 100 MHz

Table A.7.5.1.2.1-2: General test parameters for FR2 in-sync testing in non-DRX mode

Parameter			Unit	Value
				Test 1
Active PCell				Cell 1
RF Channel Number				1
Duplex mode		Config 1		TDD
$BW_{channel}$		Config 1		100: $N_{RB,c}$ = 66
Data RBs allocated		Config 1		24
DL initial BWP configuration		Config 1		DLBWP.0.1
DL dedicated BWP configuration		Config 1		DLBWP.1.1
UL initial BWP configuration		Config 1		ULBWP.0.1
UL dedicated BWP configuration		Config 1		ULBWP.1.1
TDD Configuration		Config 1		TDDConf.3.1
RMSI CORESET Reference Channel		Config 1		CR.3.1 TDD
Dedicated CORESET Reference Channel		Config 1		CCR.3.1 TDD
SSB Configuration		Config 1		SSB.1 FR2
SMTC Configuration		Config 1		SMTC.3
PDSCH/PDCCH subcarrier spacing		Config 1		120 KHz
PRACH Configuration		Config 1		Table A.3.8.3.1
SSB index assigned as RLM RS		Config 1		0,1
OCNG parameters				OP.5
CP length				Normal
In sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	4
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	0
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
Out of sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	4
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
DRX				*OFF*
Gap pattern ID				N.A.

Layer 3 filtering			*Enabled*
T310 timer		ms	4000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1		CSI-RS.3.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
TCI states for PDCCH/PDSCH			TCI.State.2
CSI-RS for tracking	Config 1		TRS.2.1 TDD
T1		s	0.2
T2		s	0.2
T3		s	1.88
T4		s	0.2
T5		s	3.84
D1		s	3.8
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.7.5.1.2.1-3: OTA related cell specific test parameters for FR2 (Cell 1) for in-sync radio link monitoring tests in non-DRX mode

Parameter		Unit	Test 1									
			T1	T2	T3	T4	T5	T1	T2	T3	T4	T5
AoA setup			Setup 3 defined in A.3.15									
			AoA1					AoA2				
Assumption for UE beams Note 5			Rough					Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0					Not sent				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0									
EPRE ratio of PBCH DMRS to SSS		dB										
EPRE ratio of PBCH to PBCH DMRS		dB										
EPRE ratio of PSS to SSS		dB										
EPRE ratio of PDSCH DMRS to SSS		dB										
EPRE ratio of PDSCH to PDSCH DMRS		dB										
EPRE ratio of OCNG DMRS to SSS		dB										
EPRE ratio of OCNG to OCNG DMRS		dB										
ssb-Index 0 SNR	Config 1	dB	2 Note 6	-6 Note 6	-15	-4.5	2 Note 6					
ssb-Index 1 SNR	Config 1		Not sent					2 Note 6	-15	-15	-15	-15
N_{oc}	Config 1	dBm/ 15kHz	-92.1					-92.1				
Time multiplexing of the downlink transmissions from each AoA			Defined in Figure A.7.5.1.2.1-2									
Propagation condition			TDL-A 30ns 75Hz					TDL-A 30ns 75Hz				

Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 4: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6.
Note 5: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 6: This value allows up to 1dB degradation from applied SNR to UE baseband

Table A.7.5.1.2.1-4: Void

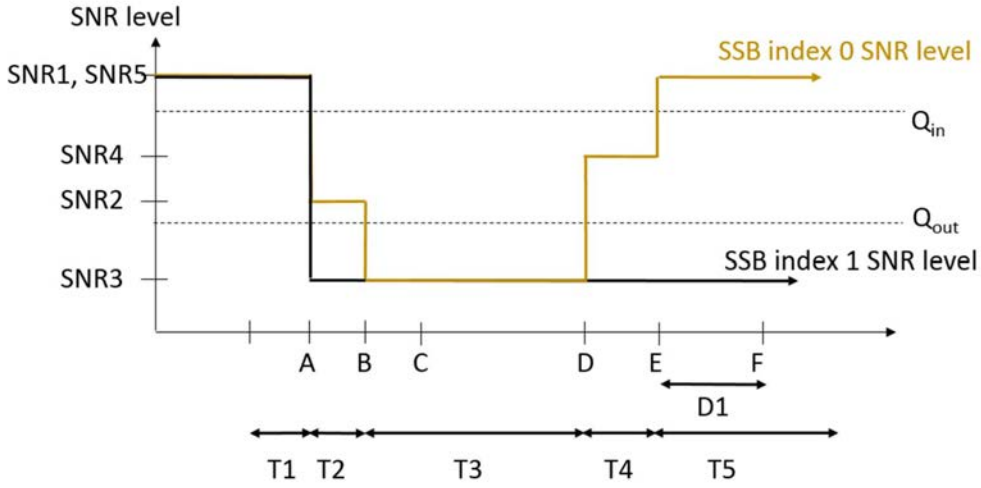

Figure A.7.5.1.2.1-1: SNR variation for in-sync testing

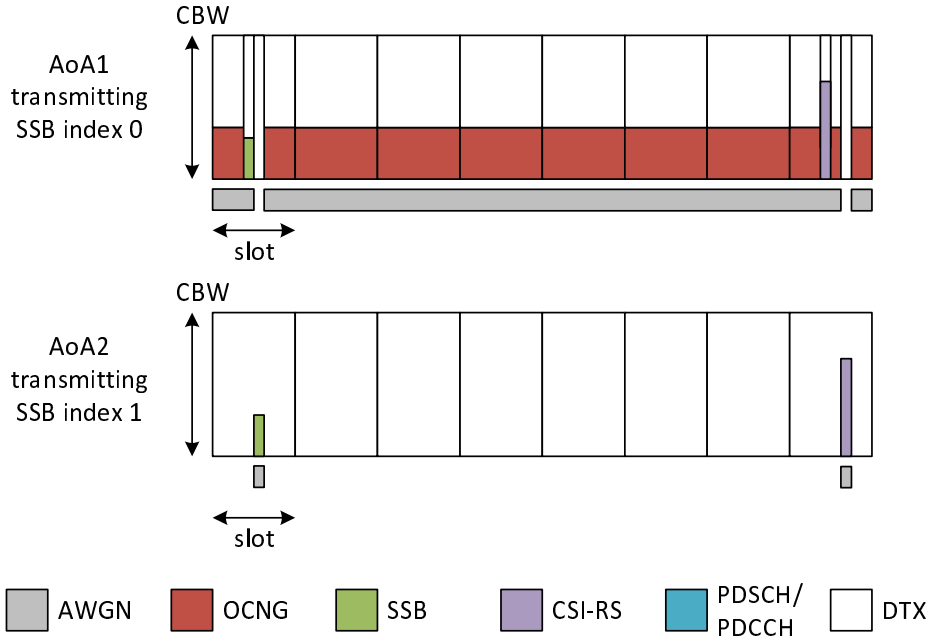

Figure A.7.5.1.2.1-2: Time multiplexed downlink transmissions

A.7.5.1.2.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.1.3 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with SSB-based RLM RS in DRX mode

A.7.5.1.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell when DRX is used. This test will partly verify the FR2 radio link monitoring requirements in clause 8.1.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to '*rlf*'. Supported test configurations are shown in table A.7.5.1.3.1-1. The test parameters are given in Tables A.7.5.1.3.1-2, and A.7.5.1.3.1-3. There is one cell (Cell 1), which is the active NR cell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.7.5.1.3.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

Table A.7.5.1.3.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	TDD, SSB SCS 120 KHz, data SCS 120KHz, BW 100 MHz

Table A.7.5.1.3.1-2: General test parameters for FR2 out-of-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		TDD
$BW_{channel}$	Config 1		100: $N_{RB,c}$ = 66
Data RBs allocated	Config 1		66
DL initial BWP configuration	Config 1		DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.1
UL initial BWP configuration	Config 1		ULBWP.0.1
UL dedicated BWP configuration	Config 1		ULBWP.1.1
TDD Configuration	Config 1		TDDConf.3.1
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.3.4 TDD
SSB Configuration	Config 1		SSB.1 FR2
SMTC Configuration	Config 1		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1		120 KHz
PRACH Configuration	Config 1		Table A.3.8.3.1
SSB index assigned as RLM RS	Config 1		0,1
OCNG parameters			OP.1
CP length			Normal
	DCI format		1-0
	Number of Control OFDM symbols		2

Out of sync transmission parameters	Aggregation level		CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	4
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
DRX Configuration				DRX.3
Gap pattern ID				N.A.
Layer 3 filtering				*Enabled*
T310 timer			ms	*0*
T311 timer			ms	1000
N310				1
N311				1
CSI-RS for CSI reporting		Config 1		CSI-RS.3.1 TDD
reportConfigType				periodic
reportQuantity				cri-RI-PMI-CQI
CSI reporting periodicity			slot	40
CSI reporting offset			slot	4
TCI states for PDCCH/PDSCH				TCI.State.2
CSI-RS for tracking		Config 1		TRS.2.1 TDD
T1			s	0.2
T2			s	14.48
T3			s	14.48
D1			s	14.44
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.7.5.1.3.1-3: OTA related cell specific test parameters for FR2 (Cell 1) for out-of-sync radio link monitoring tests in DRX mode

Parameter		Unit	Test 1		
			T1	T2	T3
AoA setup			Setup 1 defined in A.3.15		
Assumption for UE beams Note 5			Rough		
EPRE ratio of PDCCH DMRS to SSS		dB	4		
EPRE ratio of PDCCH to PDCCH DMRS		dB	0		
EPRE ratio of PBCH DMRS to SSS		dB	0		
EPRE ratio of PBCH to PBCH DMRS		dB			
EPRE ratio of PSS to SSS		dB			
EPRE ratio of PDSCH DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
ssb-Index 0 SNR	Config 1	dB	$2^{Note 6}$	$-6^{Note 6}$	-15
ssb-Index 1 SNR	Config 1		$2^{Note 6}$	-15	-15
N_{oc}	Config 1	dBm/15K Hz	-104.7dBm		
Propagation condition			TDL-A 30ns 75Hz		

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 3:	SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 4:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6.
Note 5:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 6:	This value allows up to 1dB degradation from applied SNR to UE baseband.

Table A.7.5.1.3.1-4: Void

Table A.7.5.1.3.1-5: Void

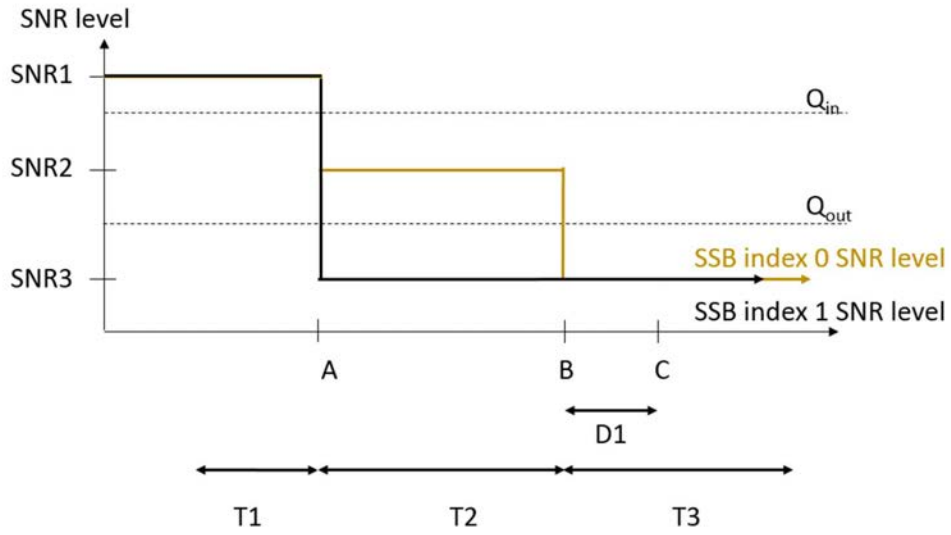

Figure A.7.5.1.3.1-1: SNR variation for out-of-sync testing

A.7.5.1.3.2 Test Requirements

The UE behavior in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.1.4 Radio Link Monitoring In-sync Test for FR2 PCell configured with SSB-based RLM RS in DRX mode

A.7.5.1.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell when DRX is used. This test will partly verify the FR2 radio link monitoring requirements in clause 8.1.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to '*rlf*'. Supported test configurations are shown in table A.7.5.1.4.1-1. The test parameters are given in Tables A.7.5.1.4.1-2, and A.7.5.1.4.1-3. There is one cell (Cell 1), which is the active NR cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.7.5.1.4.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

Table A.7.5.1.4.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	TDD, SSB SCS 120 KHz, data SCS 120KHz, BW 100 MHz

Table A.7.5.1.4.1-2: General test parameters for FR2 in-sync testing in DRX mode

Parameter			Unit	Value
				Test 1
Active PCell				Cell 1
RF Channel Number				1
Duplex mode		Config 1		TDD
$BW_{channel}$		Config 1		100: $N_{RB,c}$ = 66
Data RBs allocated		Config 1		66
DL initial BWP configuration		Config 1		DLBWP.0.1
DL dedicated BWP configuration		Config 1		DLBWP.1.1
UL initial BWP configuration		Config 1		ULBWP.0.1
UL dedicated BWP configuration		Config 1		ULBWP.1.1
TDD Configuration		Config 1		TDDConf.3.1
RMSI CORESET Reference Channel		Config 1		CR.3.1 TDD
Dedicated CORESET Reference Channel		Config 1		CCR.3.1 TDD
SSB Configuration		Config 1		SSB.1 FR2
SMTC Configuration		Config 1		SMTC.3
PDSCH/PDCCH subcarrier spacing		Config 1		120 KHz
PRACH Configuration		Config 1		Table A.3.8.3.1
SSB index assigned as RLM RS		Config 1		0,1
OCNG parameters				OP.1
CP length				Normal
In sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	4
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	0
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
	DCI format			1-0
	Number of Control OFDM symbols			2

Out of sync transmission parameters	Aggregation level		CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	4
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
DRX Configuration				DRX.11
Gap pattern ID				N.A.
Layer 3 filtering				*Enabled*
T310 timer			ms	4000
T311 timer			ms	1000
N310				1
N311				1
CSI-RS for CSI reporting		Config 1		CSI-RS.3.1 TDD
reportConfigType				periodic
reportQuantity				cri-RI-PMI-CQI
CSI reporting periodicity			slot	40
CSI reporting offset			slot	4
TCI states for PDCCH/PDSCH				TCI.State.2
CSI-RS for tracking		Config 1		TRS.2.1 TDD
T1			s	0.2
T2			s	0.2
T3			s	2.8
T4			s	0.2
T5			s	3.88
D1			s	3.84
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.7.5.1.4.1-3: OTA related cell specific test parameters for FR2 (Cell 1) for in-sync radio link monitoring test in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
AoA setup			Setup 1 defined in A.3.15				
Assumption for UE beams Note 5			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0				
EPRE ratio of PBCH DMRS to SSS		dB	0				
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
ssb-Index 0 SNR	Config 1	dB	$2^{Note 6}$	$-6^{Note 6}$	-15	-4.5	$2^{Note 6}$
ssb-Index 1 SNR	Config 1		$2^{Note 6}$	-15	-15	-15	-15
N_{oc}	Config 1	dBm/15KHz	-104.7dBm				
Propagation condition			TDL-A 30ns 75Hz				

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.3
Note 3:	SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 4:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6.
Note 5:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 6:	This value allows up to 1dB degradation from applied SNR to UE baseband.

Table A.7.5.1.4.1-4: Void

Table A.7.5.1.4.1-5: Void

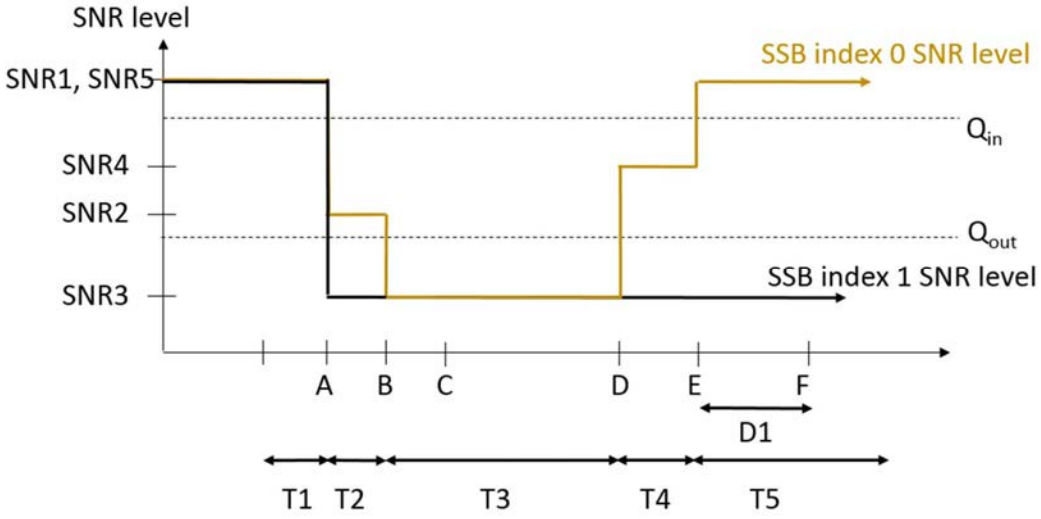

Figure A.7.5.1.4.1-1: SNR variation for in-sync testing

A.7.5.1.4.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.1.5 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with CSI-RS-based RLM in non-DRX mode

A.7.5.1.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when no DRX is used. This test will partly verify the FR2 PCell CSI-RS Out-of-sync radio link monitoring requirements in clause 8.1.

The test parameters are given in Tables A.7.5.1.5.1-1, A.7.5.1.5.1-2, A.7.5.1.5.1-3 and A.7.5.1.5.1-4 below. There is one cell, cell 1 which is the PCell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.7.5.1.5.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 10 ms. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test. In the test, SSB0 and SSB1 are configured as BFD-RS.

Table A.7.5.1.5.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Table A.7.5.1.5.1-2: General test parameters for FR2 PCell for CSI-RS out-of-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		TDD
$BW_{channel}$	Config 1		100: $N_{RB,c}$ = 66
Data RBs allocated	Config 1		24
$BW_{occupied}$	Config 1		24
TDD Configuration	Config 1		TDDConf.3.1
DL initial BWP configuration	Config 1		DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.4
UL initial BWP configuration	Config 1		ULBWP.0.1
UL dedicated BWP configuration	Config 1		ULBWP.1.4
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.3.4 TDD CCR.3.6 TDD
SSB Configuration	Config 1		SSB.1 FR2
SMTC Configuration	Config 1		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1		120 KHz
CSI-RS for RLM	Config 1		Resource #4 in TRS.2.1 TDD Resource #4 in TRS.2.2 TDD
TRS configuration			TRS.2.1 TDD TRS.2.2 TDD
TCI configuration for PDCCH#1/PDSCH			TCI.State.2
TCI configuration for PDCCH#2			TCI.State.3
OCNG parameters			OP.5
CP length			Normal
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4

	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			OFF
Gap pattern ID			*gp0
Layer 3 filtering			*Enabled*
T310 timer		ms	*0*
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1		CSI-RS.3.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
T1		s	0.2
T2		s	0.35
T3		s	0.35
D1		s	0.31
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.7.5.1.5.1-3: Cell specific test parameters for FR2 for CSI-RS out-of-sync radio link monitoring in non-DRX mode

Parameter		Unit	Test 1					
			T1	T2	T3	T1	T2	T3
AoA setup			Setup 3 defined in A.3.15					
			AoA1			AoA2		
Assumption for UE beams Note 10			Rough			Rough		
EPRE ratio of PDCCH DMRS to SSS		dB	4			Not sent		
EPRE ratio of PDCCH to PDCCH DMRS		dB						
EPRE ratio of PBCH DMRS to SSS		dB	0					
EPRE ratio of PBCH to PBCH DMRS		dB						
EPRE ratio of PSS to SSS		dB						
EPRE ratio of PDSCH DMRS to SSS		dB						
EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
SNR on RLM-RS1	Config 1	dB	2 Note 11	-6 Note 11	-15			
SNR on RLM-RS2	Config 1	dB	Not sent			2 Note 11	-15	-15
N_{oc}	Config 1	dBm/ 15kHz	-92.1			-92.1		
Propagation condition			TDL-C 300ns 100Hz			TDL-C 300ns 100Hz		

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8:	The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.7.5.1.5.1-1.
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6.
Note 10:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 11:	This value allows up to 1dB degradation from applied SNR to UE baseband

Table A.7.5.1.5.1-4: Measurement gap configuration for FR2 CSI-RS out-of-sync radio link monitoring in non-DRX mode

Field	Test 1
	Value
gapOffset	0
Note 1: RLM RS is partially overlapped with measurement gap	

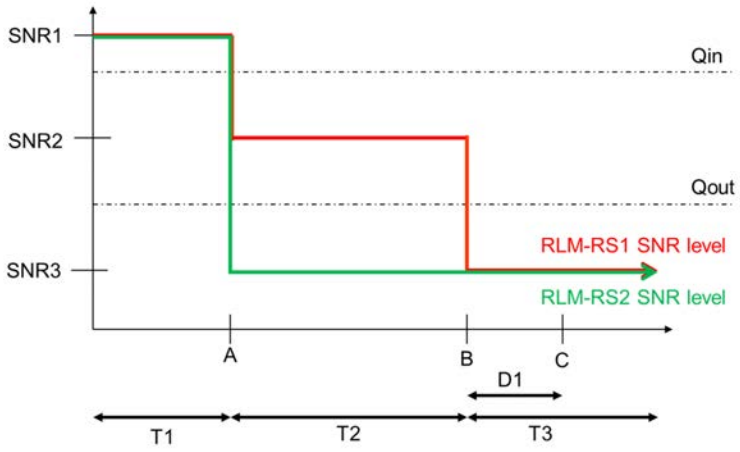

Figure A.7.5.1.5.1-1: SNR variation for CSI-RS out-of-sync testing

A.7.5.1.5.2 Test Requirements

The UE behaviour during time durations T1, T2, and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

The UE shall stop transmitting uplink signal in Cell 1 no later than time point C (D_1 second after the start of the time duration T3) on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.1.6 Radio Link Monitoring In-sync Test for FR2 PCell configured with CSI-RS-based RLM in non-DRX mode

A.7.5.1.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when no DRX is used. This test will partly verify the FR2 PCell CSI-RS In-sync radio link monitoring requirements in clause 8.1.

The test parameters are given in Tables A.7.5.1.6.1-1, A.7.5.1.6.1-2 and A.7.5.1.6.1-3 below. There is one cells, cell 1which is the PCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.7.5.1.6.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 10 ms. In the test, DRX configuration is not enabled. In the test, SSB0 and SSB1 are configured as BFD-RS.

Table A.7.5.1.6.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Table A.7.5.1.6.1-2: General test parameters for FR2 PCell for CSI-RS in-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		TDD
$BW_{channel}$	Config 1		100: $N_{RB,c}$ = 66
Data RBs allocated	Config 1		24
$BW_{occupied}$	Config 1		24
TDD Configuration	Config 1		TDDConf.3.1
DL initial BWP configuration	Config 1		DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.4
UL initial BWP configuration	Config 1		ULBWP.0.1
UL dedicated BWP configuration	Config 1		ULBWP.1.4
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.3.1 TDD CCR.3.3 TDD
SSB Configuration	Config 1		SSB.1 FR2
SMTC Configuration	Config 1		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1		120 KHz
CSI-RS for RLM	Config 1		Resource #4 in TRS.2.1 TDD Resource #4 in TRS.2.2 TDD
TRS configuration			TRS.2.1 TDD TRS.2.2 TDD
TCI configuration for PDCCH#1/PDSCH			TCI.State.2
TCI configuration for PDCCH#2			TCI.State.3

OCNG parameters			OP.5
CP length			Normal
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			OFF
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*
T310 timer		ms	1000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1		CSI-RS.3.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
T1		s	0.2
T2		s	0.2
T3		s	0.24
T4		s	0.2
T5		s	0.88
D1		s	0.84
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.7.5.1.6.1-3: Cell specific test parameters for FR2 for CSI-RS in-sync radio link monitoring in non-DRX mode

Parameter	Unit	Test 1									
		T1	T2	T3	T4	T5	T1	T2	T3	T4	T5
AoA setup		Setup 3 defined in A.3.15									
		AoA1					AoA2				
Assumption for UE beams Note 10		Rough					Rough				
EPRE ratio of PDCCH DMRS to SSS	dB	4					Not sent				
EPRE ratio of PDCCH to PDCCH DMRS	dB										
EPRE ratio of PBCH DMRS to SSS	dB	0									
EPRE ratio of PBCH to PBCH DMRS	dB										

EPRE ratio of PSS to SSS		dB											
EPRE ratio of PDSCH DMRS to SSS		dB											
EPRE ratio of PDSCH to PDSCH DMRS		dB											
EPRE ratio of OCNG DMRS to SSS		dB											
EPRE ratio of OCNG to OCNG DMRS		dB											
SNR on RLM-RS1	Config 1	dB	2 Note 11	-6 Note 11	-15	-4.5	2 Note 11						
SNR on RLM-RS2	Config 1	dB	Not sent					2 Note 11	-15	-15	-15	-15	
N_{oc}	Config 1	dBm/ 15KHz	-92.1					-92.1					
Propagation condition			TDL-C 300ns 100Hz					TDL-C 300ns 100Hz					

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure A.7.5.1.6.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6.
Note 10: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband.

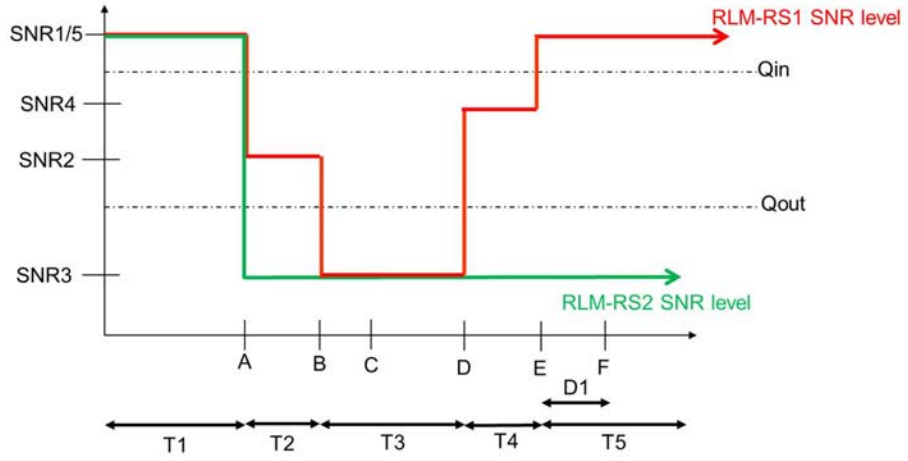

Figure A.7.5.1.6.1-1: SNR variation for CSI-RS in-sync testing

A.7.5.1.6.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.1.7 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with CSI-RS-based RLM in DRX mode

A.7.5.1.7.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when DRX is used. This test will partly verify the FR2 PCell CSI-RS Out-of-sync radio link monitoring requirements in clause 8.1.

The test parameters are given in Tables A.7.5.1.7.1-1, A.7.5.1.7.1-2, and A.7.5.1.7.1-3 below. There is one cell, cell 1 is the PCell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.7.5.1.7.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 10 ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test. In the test, SSB0 and SSB1 are configured as BFD-RS.

Table A.7.5.1.7.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Table A.7.5.1.7.1-2: General test parameters for FR2 PCell for CSI-RS out-of-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		TDD
TDD Configuration	Config 1		TDDConf.3.1
DL initial BWP configuration	Config 1		DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.1
UL initial BWP configuration	Config 1		ULBWP.0.1
UL dedicated BWP configuration	Config 1		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.3.4 TDD CCR.3.6 TDD
SSB Configuration	Config 1		SSB.1 FR2
SMTC Configuration	Config 1		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1		120 KHz
CSI-RS for RLM	Config 1		Resource #4 in TRS.2.1 TDD Resource #4 in TRS.2.2 TDD
TRS configuration			TRS.2.1 TDD TRS.2.2 TDD
TCI configuration for PDCCH#1/PDSCH			TCI.State.2
TCI configuration for PDCCH#2			TCI.State.3
OCNG parameters			OP.1
CP length			Normal
	DCI format		1-0

Out of sync transmission parameters	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			DRX.3
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*
T310 timer		ms	*0*
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1		CSI-RS.3.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
T1		s	0.2
T2		s	1.28
T3		s	1.28
D1		s	1.24
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.7.5.1.7.1-3: Cell specific test parameters for FR2 for CSI-RS out-of-sync radio link monitoring in DRX mode

Parameter		Unit	Test 1		
			T1	T2	T3
AoA setup		dB	Setup 1 defined in A.3.15		
Assumption for UE beams Note 10			Rough		
EPRE ratio of PDCCH DMRS to SSS		dB	4		
EPRE ratio of PDCCH to PDCCH DMRS		dB			
EPRE ratio of PBCH DMRS to SSS		dB	0		
EPRE ratio of PBCH to PBCH DMRS		dB			
EPRE ratio of PSS to SSS		dB			
EPRE ratio of PDSCH DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS1	Config 1	dB	2 Note 11	-6 Note 11	-15
SNR on RLM-RS2	Config 1	dB	2 Note 11	-15	-15

N_{oc}	Config 1	dBm/15KHz	-104.7
Propagation condition			TDL-C 300ns 100Hz

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.7.5.1.7.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is specified in clause A.3.6.
Note 10: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband.

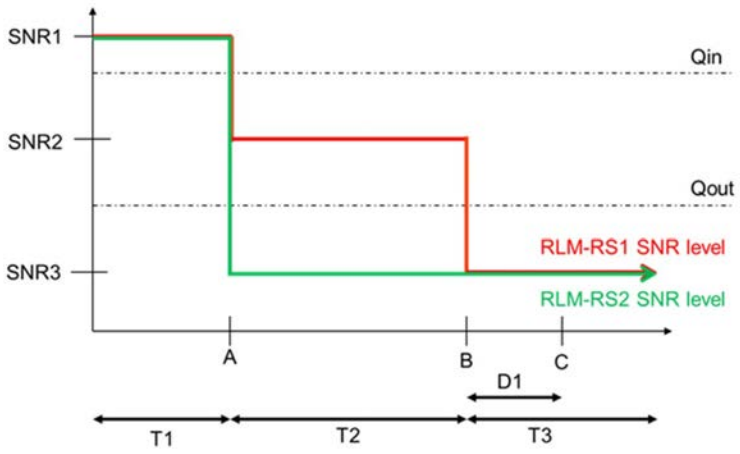

Figure A.7.5.1.7.1-1: SNR variation for CSI-RS out-of-sync testing

A.7.5.1.7.2 Test Requirements

The UE behaviour during time durations T1, T2, and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 (PCell) at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

The UE shall stop transmitting uplink signal in Cell 1 (PCell) no later than time point C (D_1 secondafter the start of the time duration T3) on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.1.8 Radio Link Monitoring In-sync Test for FR2 PCell configured with CSI-RS-based RLM in DRX mode

A.7.5.1.8.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when DRX is used. This test will partly verify the FR2 PCell CSI-RS In-sync radio link monitoring requirements in clause 8.1.

The test parameters are given in Tables A.7.5.1.8.1-1, A.7.5.1.8.1-2, A.7.5.1.8.1-3 and A.7.5.1.8.1-4 below. There is one cells, cell 1which is the PCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.7.5.1.8.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 10 ms. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test. In the test, SSB0 and SSB1 are configured as BFD-RS.

Table A.7.5.1.8.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Table A.7.5.1.8.1-2: General test parameters for FR2 PCell for CSI-RS in-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		TDD
TDD Configuration	Config 1		TDDConf.3.1
DL initial BWP configuration	Config 1		DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.1
UL initial BWP configuration	Config 1		ULBWP.0.1
UL dedicated BWP configuration	Config 1		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.3.1 TDD CCR.3.3 TDD
SSB Configuration	Config 1		SSB.1 FR2
SMTC Configuration	Config 1		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1		120 KHz
CSI-RS for RLM	Config 1		Resource #4 in TRS.2.1 TDD Resource #4 in TRS.2.2 TDD
TRS configuration			TRS.2.1 TDD TRS.2.2 TDD
TCI configuration for PDCCH#1/PDSCH			TCI.State.2
TCI configuration for PDCCH#2			TCI.State.3
OCNG parameters			OP.1
CP length			Normal
	DCI format		1-0

Out of sync transmission parameters	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			DRX.3
Gap pattern ID			*gp0
Layer 3 filtering			*Enabled*
T310 timer		ms	*2000*
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1		CSI-RS.3.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
T1		s	0.2
T2		s	0.2
T3		s	1.64
T4		s	0.2
T5		s	1.88
D1		s	1.84
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.7.5.1.8.1-3: Cell specific test parameters for FR2 for CSI-RS in-sync radio link monitoring in non-DRX mode

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
AoA setup	dB	Setup 1 defined in A.3.15				
Assumption for UE beams Note 10		Rough				
EPRE ratio of PDCCH DMRS to SSS	dB	4				
EPRE ratio of PDCCH to PDCCH DMRS	dB					
EPRE ratio of PBCH DMRS to SSS	dB	0				
EPRE ratio of PBCH to PBCH DMRS	dB					

EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS							
EPRE ratio of OCNG DMRS to SSS							
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS1	Config 1	dB	2 Note 11	-6 Note 11	-15	-4.5	2 Note 11
SNR on RLM-RS2	Config 1	dB	2 Note 11	-15	-15	-15	-15
N_{oc}	Config 1	dBm/15KHz	-104.7				
Propagation condition			TDL-C 300ns 100Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure A.7.5.1.8.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6.
Note 10: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband.

Table A.7.5.1.8.1-4: Measurement gap configuration for FR2 CSI-RS in-sync radio link monitoring in non-DRX mode

Field	Test 1
	Value
gapOffset	0
Note 1: RLM RS is partially overlapped with measurement gap	

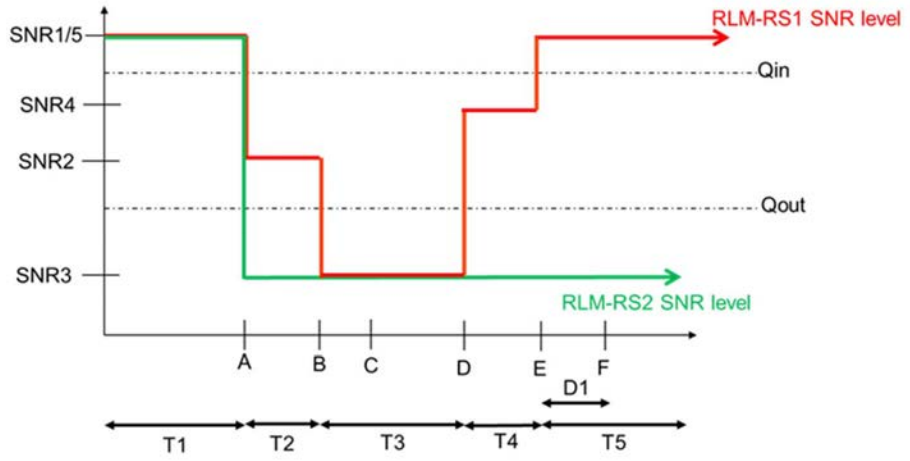

Figure A.7.5.1.8.1-1: SNR variation for CSI-RS in-sync testing

A.7.5.1.8.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.1.9 UE Radio Link Monitoring Scheduling Restrictions on FR2

A.7.5.1.9.1 Test Purpose and Environment

The purpose is to verify that the NR UE correctly follows the RLM scheduling restrictions requirements defined in clause 8.1.7. This test verifies that the UE correctly receive the PDCCH scheduled on the symbols right before the RLM SSB symbols without overlap so that it sends ACK/NACK correctly. The test case is only applicable to UE which supports pdcch-MonitoringAnyOccasions or pdcch-MonitoringAnyOccasionsWithSpanGap.

The test parameters are given in table A.7.5.1.9.1-1, table A.7.5.1.9.1-2 and table A.7.5.1.9.1-3 below. The UE is required during time period T1 to transmit ACK/NACK correctly upon scheduling of PDSCH.

Table A.7.5.1.9.1-1: Supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 120 kHz RMC SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.5.1.9.1-2: General test parameters for NR RLM scheduling restriction test case in FR2

Parameter	Unit	Test configuration	Value	Comment
RF Channel Number		1	1	
SSB configuration		1	SSB.1 FR2	
SMTC configuration		1	SMTC pattern 1	
DRX cycle length	s	1	OFF	

T1	s	1	5	During T1 the UE is required to correctly transmit ACK/NACK

Table A.7.5.1.9.1-3: Cell specific test parameters for NR RLM scheduling restriction test case in FR2

Parameter	Unit	Test configuration	Cell 1	
AoA setup		1	Setup 3 defined in A.3.15.3	
			AoA1	AoA2
Assumption for UE beams Note 1			Rough	Rough
TDD configuration		1	TDDConf.3.1	
$BW_{channel}$	MHz	1	100: $N_{RB,c}$ = 66	
Data RBs allocated		1	24	
PDSCH Reference measurement channel		1	SR.3.2 TDD	Not sent
RMSI CORESET RMC configuration		1	CR.3.1 TDD	Not sent
Dedicated CORESET RMC configuration		1	CCR.3.2 TDD	Not sent
TRS configuration		1	TRS.2.1 TDD	TRS.2.2 TDD
PDCCH/PDSCH TCI state		1	TCI.State.2	N/A
OCNG Pattern		1	OP.5 defined in A.3.2.1	Not sent
Initial DL BWP configuration		1	DLBWP.0.1	
Initial UL BWP configuration		1	ULBWP.0.1	
RLM-RS		1	SSB with index 0	SSB with index 1
N_{oc}	dBm/15kHz	1	-92.1	-92.1
N_{oc} Note2	dBm/SCS	1	-83.1	-83.1
$\hat{E}_s / N_{oc}$	dB	1	2	2
$\hat{E}_s / I_{ot}$ BB Note 4	dB	1	1	1
SSB_RP Note3	dBm/SCS	1	-81.1	-81.1
Io	dBm/95.04 MHz	1	-54.35	-54.35
Time multiplexing of the downlink transmissions from each AoA		1	Defined in Figure A.7.5.1.9.1-1	
Propagation Condition		1	AWGN	AWGN

Note 1: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.

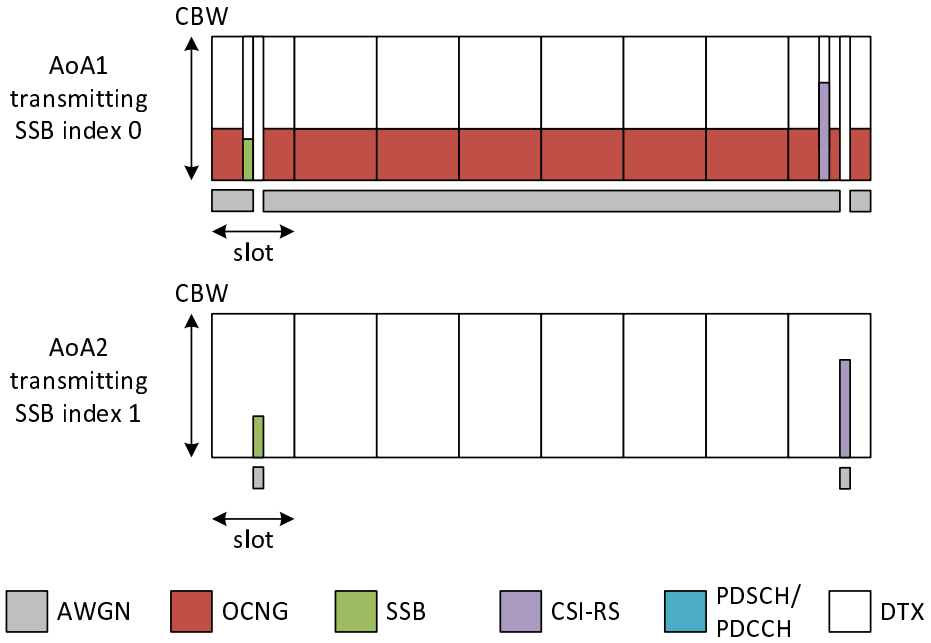

Figure A.7.5.1.9.1-1: Time multiplexed downlink transmissions

A.7.5.1.9.2 Test Requirements

The UE behaviour follows the requirements defined in clause 8.1.7.3.

A.7.5.2 Interruption

A.7.5.2.1 Interruptions during measurements on deactivated NR SCC in FR2

A.7.5.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE missed ACK/NACK rate does not exceed the limits at NR PSCell interruptions during the measurement on the deactivated NR SCC. This test will verify the missed ACK/NACK rate for PCell in standalone NR specified in clause 8.2.2.2. Supported test configurations are shown in table A.7.5.2.1.1-1.

The general test parameters and NR cell specific test parameters are given in Table A.7.5.2.1.1-2 and A.7.5.2.1.1-3 below. In the test there are two cells: Cell1 and Cell2. Cell1 is PCell, Cell2 is an NR deactivated SCell. Cell1 shall be configured as PCell and Cell2 shall be configured as SCell.

The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, the UE is connected to Cell1 and Cell2. The point in time at which the RRC message including *measCycleSCell* or *allowInterruptions* for the deactivated NR SCells is received at the UE antenna connector, defines the start of time period T1. During T1, PCell is continuously scheduled in DL.

Table A.7.5.2.1.1-1: Interruptions during measurements on deactivated NR SCC supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD – TDD duplex mode

Table A.7.5.2.1.1-2: General test parameters for interruptions during measurements on deactivated NR SCC in standalone NR

Parameter	Unit	Value	Comment
RF Channel Number		1, 2	Two NR RF channels
Active PCell		Cell1	PCell on NR RF channel number 1.
Configured deactivated SCell		Cell2	Deactivated SCell on NR RF channel number 2.
CP length		Normal	Applicable to Cell1 and Cell2
DRX		OFF	
Measurement gap pattern Id		OFF	
SCell measurement cycle (measCycleSCell)	ms	640	
T1	s	10	

Table A.7.5.2.1.1-3: NR cell specific test parameters for interruptions during measurements on deactivated NR SCC in standalone NR

Parameter		Unit	Cell1	Cell2
Frequency Range			FR2	
Duplex mode			TDD	
TDD configuration			TDDConf.3.1	
$BW_{channel}$			100 MHz: $N_{RB,c}$ = 66	
Data RBs allocated			66	
Initial DL BWP Configuration			DLBWP.0.2 Note4	
Initial UL BWP Configuration			ULBWP.0.2 Note6	
Downlink dedicated BWP Configuration			DLBWP.1.1	
Uplink dedicated BWP configuration			ULBWP.1.1	
PDSCH Reference measurement channel			SR.3.1 TDD	
RMSI CORESET parameters			CR.3.1 TDD	
Dedicated CORESET parameters			CCR.3.1 TDD	
OCNG Patterns			OP.1	
SMTC Configuration			SMTC.1	
SSB Configuration			SSB.1 FR2	
TCI State			TCI.State.0	
TRS Configuration			TRS.2.1 TDD	
Correlation Matrix and Antenna Configuration			1x2 Low	
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				

EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
Time offset to Cell1 Note 3	µs	-	3
Propagation Condition		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2 defined in clause 12 of of TS 38.213 [3].

Table A.7.5.2.1.1-4: OTA related test parameters for interruptions during measurements on deactivated NR SCC in standalone NR

Parameter		Unit	Cell 1	Cell 2
Angle of arrival configuration			Setup1 according to table A.3.15.1	Setup 1according to table A.3.15.1
Assumption for UE beams Note 6			Rough	Rough
N_{oc} Note1	NR_TDD_FR2_A	dBm/15kHz	-104.7	-104.7
	NR_TDD_FR2_B			
	NR_TDD_FR2_F			
	NR_TDD_FR2_G			
	NR_TDD_FR2_T			
	NR_TDD_FR2_Y			
N_{oc} Note1	NR_TDD_FR2_A	dBm/SCS	-95.7	-95.7
	NR_TDD_FR2_B			
	NR_TDD_FR2_F			
	NR_TDD_FR2_G			
	NR_TDD_FR2_T			
	NR_TDD_FR2_Y			
SSB_RPNote2	NR_TDD_FR2_A	dBm/120KHz Note3	-88.7	-88.7
	NR_TDD_FR2_B			
	NR_TDD_FR2_F			
	NR_TDD_FR2_G			
	NR_TDD_FR2_T			
	NR_TDD_FR2_Y			
$\hat{E}_s/N_{oc}$		dB	7	7
$\hat{E}_s/I_{\alpha}$		dB	7	7
IoNote2	NR_TDD_FR2_A	dBm/95.04 MHz Note4	-58.92	-58.92
	NR_TDD_FR2_B			
	NR_TDD_FR2_F			
	NR_TDD_FR2_G			
	NR_TDD_FR2_T			
	NR_TDD_FR2_Y			

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 3:	SSB_RP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5:	As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 6:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.

A.7.5.2.1.2 Test Requirements

The UE shall be continuously scheduled on PCell during the entire length of T1. During the time duration T1 the UE shall transmit at least 99.5% of ACK/NACK on PCell.

If the NR PCell is not in the same band as the deactivated SCell, the UE is only allowed to cause interruptions on NR PCell immediately before and immediately after an SMTC. Each interruption on NR PCell shall not exceed the value defined in Table A.7.5.2.1.2-1.

If the NR PCell is in the same band as the deactivated SCell, the UE is only allowed to cause an interruption on PCell no earlier than 4 slots before an SMTC and no later than 4 slots after the SMTC. the interruption on NR PCell shall not exceed the value defined in Table A.7.5.2.1.2-2.

Table A.7.5.2.1.2-1: Interruption duration if the PCell is not in the same band as the deactivated SCell

μ	NR Slot length (ms)	Interruption length (slot)
3	0.125	4

Table A.7.5.2.1.2-2: Interruption duration if the PCell is in the same band as the deactivated SCell

μ	NR Slot length (ms)	Interruption length (slot)
3	0.125	8 + SMTC duration

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.2.2 SA interruptions at NR SRS carrier-based switching

A.7.5.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that when a UE needs to transmit aperiodic SRS, the UE can perform SRS carrier-based switching to a carrier not configured for PUCCH/PUSCH transmission from a carrier with PUCCH/PUSCH transmission. The test will partly verify the interruption requirements on PCell in clause 8.2.2.2.9.

A.7.5.2.2.2 Test Parameters

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the FR2 PCell. Cell 2 is an activated FR2 SCell on the TDD SCC which operats in downlink without PUCCH/PUSCH. The UE is configured with the SRS switching between PCell and SCell.The test parameters for PCell and SCell are given in Tables A.7.5.2.2.2-2, A.7.5.2.2.2-3, and A.7.5.2.2.2-4 below. The test consists of two successive time periods, with duration of T1 and T2, respectively. Immediately at the beginning of T2, the UE is triggered for SRS switching. The UE shall be scheduled on PCell continuously throughout the test.

The test equipment verifies that potential interruption is carried out correctly by monitoring ACK/NACK sent in PCell.

Table A.7.5.2.2.2-1: Supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Table A.7.5.2.2.2-2: General test parameters for SA interruptions at NR SRS carrier-based switching

Parameter	Unit	Value	Comment
RF Channel Number		1, 2	Two NR radio channel (1, 2) are used for this test
Active PCell		Cell 1	Primary cell on NR RF channel number 1
Configured SCell		Cell 2	Activated secondary cell on NR RF channel number 2
CP length		Normal	
DRX		OFF	Continuous monitoring of PCell
T1	s	5	
T2	ms	100	UE shall perform SRS switching during T2

Table A.7.5.2.2.2-3: Cell-specific test parameters for SA interruptions at NR SRS carrier-based switching

Parameter		Unit	Cell 1	Cell 2
Frequency Range			FR2	
Duplex mode	Config 1		TDD	
TDD configuration	Config 1		TDDConf.3.1	
$BW_{channel}$	Config 1	MHz	100: $N_{RB,c}$ = 66	
Downlink initial BWP Configuration	Config 1		DLBWP.0.1	
Downlink dedicated BWP Configuration	Config 1		DLBWP.1.1	
Uplink initial BWP configuration	Config 1		ULBWP.0.1	
Uplink dedicated BWP configuration	Config 1		ULBWP.1.1	
SRS configuration	Config 1		SRS.3 TDD	
TRS configuration	Config 1		TRS.2.1 TDD	
TCI state	Config 1		TCI.State.0	
PDSCH Reference measurement channel	Config 1		SR.3.1 TDD	
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD	
RMC CORESET Reference Channel	Config 1		CCR.3.1 TDD	
OCNG Patterns			OP.1	
SSB Configuration			SSB.1 FR2	
SMTC Configuration	Config 1		SMTC.1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
$\hat{E}_s/N_{oc}$		dB	17	

Propagation Condition		AWGN
NOTE 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.		

Table A.7.5.2.2.2-4: OTA related test parameters

Parameter	Unit	Test 1	
		T1	T2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1	
Assumption for UE beams Note 6		Fine	
N_{oc} Note 1	dBm/15kHz Note 4	-112	
N_{oc} Note 1	dBm/SCS Note 3	-103	
$\hat{E}_s / N_{oc}$	dB	4	
SS-RSRP Note 2	dBm/SCS Note 4	-99	
$\hat{E}_s / I_{ot}$	dB	4	
Io Note2	dBm/95.04 MHz Note 4	-68.5	

NOTE 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
NOTE 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone.
NOTE 5: As observed with 0 dBi gain antenna at the centre of the quiet zone.
NOTE 6: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.

A.7.5.2.2.3 Test Requirements

During T2, interruption on PCell due to SRS carrier-based switching between Cell 1 and Cell 2 shall not exceed the required values specified in clause 8.2.2.2.9.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.3 SCell Activation and Deactivation Delay

A.7.5.3.1 SCell Activation and deactivation for SCell in FR2 intra-band in non-DRX

A.7.5.3.1.1 Test Purpose and Environment

The purpose of this test case is the same as for the test defined in clause A.6.5.3.1.1 except the PCell and SCell are in FR2 intra-band.

The supported test configurations are shown in table A.7.5.3.1.1-1 below. The general test parameters are the same as defined in Table A.6.5.3.1.1-2 except those described in Tables A.7.5.3.1.1-2, and cell specific test parameters are described in Tables A.7.5.3.1.1-3. OTA related test parameters are shown in table A.7.5.3.1.1-4 below.

Table A.7.5.3.1.1-1: Supported test configurations for FR2 SCell activation case

Configuration	Description
1	NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode

Table A.7.5.3.1.1-2: General test parameters for FR2 SCell activation case

Parameter	Unit	Value	Comment
RF Channel Number		1,2	Two NR radio channels are used for this test, cell 1 and cell2 use RF channel 1 and 2, respectively.

Table A.7.5.3.1.1-3: Cell specific test parameters for FR2 SCell activation case

Parameter[Note 5]	Unit	Cell 1			Cell 2		
		T1	T2	T3	T1	T2	T3
SSB ARFCN		freq1			freq2		
Duplex mode		TDD					
TDD configuration		TDDConf.3.1					
Downlink initial BWP Configuration		DLBWP.0.1					
Downlink dedicated BWP Configuration		DLBWP.1.1					
Uplink initial BWP configuration		ULBWP.0.1					
Uplink dedicated BWP configuration		ULBWP.1.1					
TRS configuration		TRS.2.1 TDD					
TCI state		TCI.State.0					
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66					
Data RBs allocated		66	66		66		
PDSCH Reference measurement channel		SR.3.1 TDD			-		
RMSI CORESET Parameters		CR.3.1 TDD			-		
Dedicated CORESET Parameters		CCR.3.1 TDD			-		
OCNG Patterns		OP.1					
SSB Configuration		SSB.1 FR2					
SMTC Configuration		SMTC.1					
CSI-RS configuration for CSI reporting		CSI-RS.3.1 TDD					
reportConfigType		periodic			N/A		
reportQuantity		cri-RI-PMI-CQI			N/A		
CSI reporting periodicity	slot	40			N/A		
CSI reporting offset	slot	4			N/A		
EPRE ratio of PSS to SSS	dB	0					
EPRE ratio of PBCH_DMRS to SSS							
EPRE ratio of PBCH to PBCH_DMRS							
EPRE ratio of PDCCH_DMRS to SSS							
EPRE ratio of PDCCH to PDCCH_DMRS							
EPRE ratio of PDSCH_DMRS to SSS							
EPRE ratio of PDSCH to PDSCH_DMRS							
EPRE ratio of OCNG DMRS to SSS[Note 1]							
EPRE ratio of OCNG to OCNG DMRS[Note 1]							
Propagation conditions		AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: Void
Note 4: Void
Note 5: Void

Table A.7.5.3.1.1-4: OTA related test parameters for FR2 SCell activation case

Parameter	Unit	Cell 1			Cell 2		
		T1	T2	T3	T1	T2	T3
Angle of arrival configuration		Setup 1 according to table A.3.15.1			Setup 1 according to table A.3.15.1		
Assumption for UE beams Note 7		Rough			Rough		
N_{oc} Note1	dBm/15kHz Note4	-104.7			-104.7		
N_{oc} Note1	dBm/SCS Note 3	-95.7			-95.7		
$\hat{E}_s / N_{oc}$	dB	7			7		
SSB_RP Note2	dBm/SCS Note4	-88.7			-88.7		
$\hat{E}_s / I_{ot}$	dB	7			7		
Io Note2	dBm/95.04 MHz Note4	-58.92			-58.92		

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 2: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 3: Void

Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone

Note 5: Void

Note 6: Void

Note 7: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.

A.7.5.3.1.2 Test Requirements

The test requirements defined in clause A.6.5.3.1.2 shall apply to this test case, except $T_{activation_time}$ will be replaced with the value $T_{FirstSSB}$ + 5ms as defined in clause 8.3.

A.7.5.3.2 SCell Activation and deactivation for FR1+FR2 inter-band with target SCell in FR2

A.7.5.3.2.1 Test Purpose and Environment

The purpose of this test case is the same as for the test defined in clause A.7.5.3.1.1 except the PCell is in FR1 and SCell is in FR2.

The supported test configurations are defined in Table A.7.5.3.2.1-1. The general test parameters are the same as defined in Table A.6.5.3.1.1-2 except that the length of T2 is 2s. And cell specific test parameters are described in Tables A.7.5.3.2.1-2. OTA related test parameters are defined in Table A.7.5.3.2.1-3.

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 2) becomes configured on NR. During T1 the SCell is powered off and UE is not aware of SCell.

A MAC message for activation of SCell is sent by the test equipment 100ms after the RRC message, in a slot # denoted m. The point in time at which the MAC message for activation of SCell is received at the UE antenna connector defines the start of time period T2.

During T2, the test equipment monitors the L1-RSRP measurement reporting for the SCell. The time when test equipment receives a valid L1-RSRP report is denoted as slot $m+T_{L1\text{-}RSRP}$. In the next DL slot after slot $m+T_{L1\text{-}RSRP}$, the test equipment sends a MAC message for the activation of the TCI state of the RMC CORESET of the SCell. In the same slot, the test equipment also sends an RRC message to configure the CSI-RS resources for SCell.

Time period T3 starts when a MAC message for deactivation of the SCell, sent from the test equipment to the UE in a slot # denoted n, is received at the UE antenna connector.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell and PCell during activation of SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The test equipment verifies the deactivation time by counting the slots from the time when the SCell1 deactivation command is sent until CSI reporting for SCell1 is discontinued.

Table A.7.5.3.2.1-1: Supported test configurations for FR2 SCell activation case

Configuration	Description
1	PCell: 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode Target SCell: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
2	PCell: 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode Target SCell: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
3	PCell: 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode Target SCell: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations	

Table A.7.5.3.2.1-2: Cell specific test parameters for FR2 SCell activation case

Parameter[Note 5]		Unit	Cell 1			Cell 2		
			T1	T2			T1	T2
SSB ARFCN			Freq1			Freq2		
Duplex mode	Config 1		FDD			TDD		
	Config 2,3		TDD					
TDD configuration	Config 1		Not Applicable			TDDConf.3.1		
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
Downlink initial BWP Configuration	Config 1,2,3		DLBWP.0.1					
Downlink dedicated BWP Configuration	Config 1,2,3		DLBWP.1.1					
Uplink initial BWP configuration	Config 1,2,3		ULBWP.0.1					
Uplink dedicated BWP configuration	Config 1,2,3		ULBWP.1.1					
TRS configuration	Config 1,2,3		N/A			TRS.2.1 TDD		
TCI state	Config 1,2,3		TCI.State.0					
$BW_{channel}$	Config 1,2	MHz	10: $N_{RB,c}$ = 52			100: $N_{RB,c}$ = 66		
	Config 3		40: $N_{RB,c}$ = 106					
Data RBs allocated	Config 1,2		52	66	52	66	52	66
	Config 3		106		106		106	
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD			-		
	Config 2		SR.1.1 TDD					
	Config 3		SR.2.1 TDD					
RMSI CORESET Parameters	Config 1		CR.1.1 FDD			-		
	Config 2		CR.1.1 TDD					
	Config 3		CR.2.1 TDD					
Dedicated CORESET Parameters	Config 1		CCR.1.1 FDD			-		
	Config 2		CCR.1.1 TDD					
	Config 3		CCR.2.1 TDD					
OCNG Patterns			OP.1					
SSB configuration	Config 1,2		SSB.1 FR1			SSB.3 FR2		
	Config 3		SSB.2 FR1					

CSI-RS configuration for CSI reporting	Config 1~3		N/A	N/A	CSI-RS.3.1 TDD Note 6	CSI-RS.3.1 TDD
reportConfigType for CSI reporting			periodic	N/A		
reportConfigType for L1-RSRP			periodic	N/A		
reportQuantity for CSI reporting			cri-RI-PMI-CQI	N/A		
reportQuantity for L1-RSRP			ssb-Index-RSRP	N/A		
CSI reporting periodicity	Config 1,2	slot	5	N/A		
	Config 3		10			
L1-RSRP reporting periodicity Note 7	Config 1,2	slot	5	N/A		
	Config 3		10			
CSI reporting offset	Config 1,2	slot	2	N/A		
	Config 3		4			
L1-RSRP reporting offset	Config 1,2	slot	2	N/A		
	Config 3		4			
SMTC configuration			SMTC.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						
EPRE ratio of PDCCH to PDCCH_DMRS						
EPRE ratio of PDSCH_DMRS to SSS						
EPRE ratio of PDSCH to PDSCH_DMRS						
EPRE ratio of OCNG DMRS to SSS Note 1						
EPRE ratio of OCNG to OCNG DMRS Note 1						
Propagation conditions			N/A Link only, see clause A.3.7A	AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: Void
Note 4: Void
Note 5: All parameters apply for configuration 1, 2 and 3
Note 6: CSI-RS for CSI measurement is (re)configured in the next DL slot after slot m+$T_{L1\text{-}RSRP}$ during T2.
Note 7: L1-RSRP measurement and reporting are configured to the the UE prior to the start of time period T1.

Table A.7.5.3.2.1-3: OTA related test parameters for FR1 PCell activation case with FR2 SCell

Parameter		Unit	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Angle of arrival configuration			N/A			According to clause A.3.15.1		
Assumption for UE beams Note 7			N/A			Rough		
N_{oc} Note 1	Config 1,2,3	dBm/15kHz	Link only, see clause A.3.7A			-104.7		
N_{oc} Note 1	Config 1,2,3	dBm/SCS				-95.7		
$\hat{E}_s / N_{oc}$	Config 1,2,3	dB				-∞	7	7
	Config 1,2,3	dB				-∞	7	7
SSB_RP Note 2, Note 4	Config 1,2,3	dBm/SCS				-∞	-88.7	-88.7

Io Note 2, Note 4	Config 1,2,3	dBm/95.04 MHz		-66.68	-58.92	-58.92

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: Void
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: Void
Note 6: Void
Note 7: Information about types of UE beam is given in B.2.1.3 and does not imit UE implementation or test system implementation.

A.7.5.3.2.2 Test Requirements

During T2 the UE shall send the first CSI report for SCell in the first available uplink resource after at least one CSI-RS transmission occasion for channel measurement and reporting after slot (m+k). UE is allowed to postpone CSI report to next available UL resource if an available uplink resource is subject to interruption. Whether CSI report in a slot was interrupted is checked by monitoring ACK/NACK sent in PCell in the slot.

During T2 the UE shall start sending valid L1-RSRP report for the SCell in the configured slots for CSI reporting after slot (m+$T_{L1\text{-}RSRP}$), where $T_{L1\text{-}RSRP}$ is no larger than

3ms + $T_{FirstSSB_MAX}$ + 15*T_{SMTC_MAX} + 8*T_{rs} + $T_{L1\text{-}RSRP,\ measure}$ + $T_{L1\text{-}RSRP,\ report}$

as defined in clause 8.3.2. For this test case, $T_{FirstSSB_MAX}$=T_{SMTC_MAX}=T_{rs}=20ms; $T_{L1\text{-}RSRP,\ measure}$=160ms and $T_{L1\text{-}RSRP,\ report}$=5ms, which allows $T_{L1\text{-}RSRP}$ 680 ms.

During T2 the UE shall start sending CSI reports for the SCell with non-zero CQI index in the configured slots for CSI reporting no later than slot m + $\frac{T_{HARQ}+T_{activtion_time}+T_{CSI_Reporting}}{NR\ slot\ length}$, where

- T_{HARQ} is defined in Table A.5.5.3.1.1-2

- $T_{activation_time}$ = 3ms + $T_{FirstSSB_MAX}$ + 15*T_{SMTC_MAX} + 8*T_{rs} + $T_{L1\text{-}RSRP,\ measure}$ + $T_{L1\text{-}RSRP,\ report}$ + max {(T_{HARQ} + $T_{uncertainty_MAC}$ + 5ms + $T_{FineTiming}$), ($T_{uncertainty_RRC}$ + T_{RRC_delay})}, which allows 710 ms

- $T_{CSI_Reporting}$ = 10ms

- NR slot length is 0.125ms for this test case.

During T3 the UE shall stop sending CSI reports for both SCells no later than slot n + $\frac{T_{HARQ}+3ms}{NR\ slot\ length}$, as defined in clause 8.3.

During T2 interruption of PCell during SCell activation shall not happen outside the slot $m + 1 + \frac{T_{HARQ}}{\text{NR slot length}}$ to $m + 1 + \frac{T_{HARQ}+3ms+T_X}{\text{NR slot length}}$, as defined in clause 8.3, where T_X =20ms.

During T3 the starting point of interruption of PCell during SCell deactivation shall not happen outside the slot n + $1 + \frac{T_{HARQ}}{NR\ slot\ length}$ to n + $1 + \frac{T_{HARQ}+3ms}{NR\ slot\ length}$, as defined in clause 8.3.

The interruption of PCell due to activation of SCell shall not be more than the values specified for SA in Clause 8.2.2.2.7.

A.7.5.3.3 SCell Activation and deactivation for SCell in FR2 inter-band in non-DRX

A.7.5.3.3.1 Test Purpose and Environment

The purpose of this test case is the same as for the test defined in clause A.7.5.3.1.1 except the PCell and SCell are in FR2 inter-band.

The supported test configurations are shown in table A.7.5.3.3.1-1 below. The general test parameters are described in Tables A.7.5.3.3.1-2, and cell specific test parameters are described in Tables A.7.5.3.3.1-3. OTA related test parameters are shown in table A.7.5.3.3.1-4 below.

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 2) becomes configured on NR. During T1 the SCell is powered off and UE is not aware of SCell. A MAC message for activation of SCell is sent by the test equipment 100ms after the RRC message, in a slot # denoted m.

The point in time at which the MAC message for activation of SCell is received at the UE antenna connector defines the start of time period T2. Immediately at beginning of T2 the transmission power of Cell 2 is increased to same level as for cell 2. During T2, the test equipment monitors the L1-RSRP measurement reporting for the SCell. The time when test equipment receives a valid L1-RSRP report is denoted as slot $m+T_{L1\text{-}RSRP}$. In the next DL slot after slot $m+T_{L1\text{-}RSRP}$, the test equipment sends a MAC message for the activation of the TCI state of the RMC CORESET of the SCell. In the same slot, the test equipment also sends an RRC message to configure the CSI-RS resources for SCell.

Time period T3 starts when a MAC message for deactivation of the SCell, sent from the test equipment to the UE in a slot # denoted n, is received at the UE antenna connector.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell and PSCell during activation of SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The test equipment verifies the deactivation time by counting the slots from the time when the SCell1 deactivation command is sent until CSI reporting for SCell1 is discontinued.

Table A.7.5.3.3.1-1: Supported test configurations for FR2 SCell activation in FR2 inter-band

Configuration	Description
1	NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode

Table A.7.5.3.3.1-2: General test parameters for FR2 SCell activation in FR2 inter-band

Parameter	Unit	Value	Comment
RF Channel Number		1,2	Two NR radio channels are used for this test. RF channel number 1 is in band 1 and RF channel number 2 is in band 2, where bands 1 and 2 are inter-band CA operating bands in FR2 as specified in Table 5.2A.2-1 in TS38.101-2.
Active PCell		Cell 1	Primary cell on NR RF channel number 1.
Configured deactivated SCell		Cell 2	Configured deactivated secondary cell on NR RF channel number 2.
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
CQI/PMI periodicity and offset configuration index		0	CQI reporting for SCell every second subframe
Cell-individual offset for cells on NR channel number	dB	0	Individual offset for cells on primary component carrier.

SCell measurement cycle (measCycleSCell)	ms	160	
Cell2 timing offset to cell1	µs	≤8	A random value from 0µs to 8µs
T1	s	7	During this time the PCell shall be known and the SCell configured and detected.
T2	s	2	During this time the UE shall activate the SCell.
T3	s	1	During this time the UE shall deactivate the SCell.
T_{HARQ}	ms	k_1×NR slot length	k_1 is a number of slots and is indicated by the PDSCH-to-HARQ-timing-indicator field in the DCI format, if present, or provided by *dl-DataToUL-ACK*, the value of k should be the minimum value defined in TS 38.213 [3] depends on UE's capability
$T_{CSI_Reporting}$	ms	2	the delay uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2]

Table A.7.5.3.3.1-3: Cell specific test parameters for FR2 SCell activation in FR2 inter-band

Parameter[Note 5]	Unit	T1		T2		T3	
		Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN		freq1	freq2	freq1	freq2	freq1	freq2
Duplex mode		TDD		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1		TDDConf.3.1	
Downlink initial BWP Configuration		DLBWP.0.1		DLBWP.0.1		DLBWP.0.1	
Downlink dedicated BWP Configuration		DLBWP.1.1		DLBWP.1.1		DLBWP.1.1	
Uplink initial BWP configuration		ULBWP.0.1		ULBWP.0.1		ULBWP.0.1	
Uplink dedicated BWP configuration		ULBWP.1.1		ULBWP.1.1		ULBWP.1.1	
TRS configuration		TRS.2.1 TDD		TRS.2.1 TDD		TRS.2.1 TDD	
TCI state		TCI.State.0		TCI.State.0		TCI.State.0	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Parameters		CR.3.1 TDD	-	CR.3.1 TDD	-	CR.3.1 TDD	-
Dedicated CORESET Parameters		CCR.3.1 TDD	-	CCR.3.1 TDD	-	CCR.3.1 TDD	-
CSI-RS configuration		NA	NA	NA	CSI-RS.3.1 TDD Note 2	NA	CSI-RS.3.1 TDD
CSI reporting periodicity [Note 3]		NA	5	NA	5	NA	5
OCNG Patterns		OP.1					
SSB Configuration		SSB.1 FR2					
SMTC Configuration		SMTC.1					
EPRE ratio of PSS to SSS	dB	0					
EPRE ratio of PBCH_DMRS to SSS							
EPRE ratio of PBCH to PBCH_DMRS							
EPRE ratio of PDCCH_DMRS to SSS							
EPRE ratio of PDCCH to PDCCH_DMRS							
EPRE ratio of PDSCH_DMRS to SSS							
EPRE ratio of PDSCH to PDSCH_DMRS							
EPRE ratio of OCNG DMRS to SSS[Note 1]							
EPRE ratio of OCNG to OCNG DMRS [Note 1]							
Propagation conditions		AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: CSI-RS for CSI measurement is (re)configured in the next DL slot after slot m+$T_{L1\text{-}RSRP}$ during T2.
Note 3: L1-RSRP measurement and reporting are configured to the the UE prior to the start of time period T1.

Table A.7.5.3.3.1-4: OTA related test parameters for FR2 SCell activation in FR2 inter-band

Parameter[Note 6]	Unit	Cell 1			Cell 2		
		T1	T2	T3	T1	T2	T3
AoA setup		Setup 3 as specified in clause A.3.15					
		AoA1			AoA2		
Assumption for UE beams [Note 7]		Rough			Rough		
N_{oc} [Note1]	dBm/15kHz[Note4]	-92.1			-92.1		
N_{oc} [Note1]	dBm/SCS[Note3]	-83.1			-83.1		
$\hat{E}_s / N_{oc}$	dB	0			0		
SS-RSRP[Note2]	dBm/SCS [Note4]	-83.1			-83.1		
$\hat{E}_s / I_{ot}$	dB	0			0		
Io[Note2]	dBm/95.04 MHz [Note4]	-51.1			-51.1		

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6: All parameters apply for configuration 1
Note 7: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.

A.7.5.3.3.2 Test Requirements

During T2 the UE shall start sending CSI report for the SCell in the configured slots for CSI reporting after at least one CSI-RS transmission occasion for channel measurement and reporting after slot (m+k). UE shall send the first CSI report for SCell after receiving at least one CSI-RS transmission occasion for channel measurement and reporting after slot (m+k), or in the next available uplink resource for CSI reporting if the slot was subject to interruption. Whether CSI report in a slot was interrupted is checked by monitoring ACK/NACK sent in PCell in the slot.

During T2, the UE shall start sending valid L1-RSRP report for the SCell in the configured slots for CSI reporting after slot (m+$T_{L1\text{-}RSRP}$), where $T_{L1\text{-}RSRP}$ is no larger than 3ms + $T_{FirstSSB_MAX}$ + 15*T_{SMTC_MAX} + 8*T_{rs} + $T_{L1\text{-}RSRP,\ measure}$ + $T_{L1\text{-}RSRP,\ report}$ as defined in clause 8.3.2. For this test case, $T_{FirstSSB_MAX}$=T_{SMTC_MAX}=T_{rs}=20ms; $T_{L1\text{-}RSRP,\ measure}$=480ms and $T_{L1\text{-}RSRP,\ report}$=5ms, which allows $T_{L1\text{-}RSRP}$ =1000ms.

During T2, the UE shall start sending CSI reports for the SCell with non-zero CQI index in the configured slots for CSI reporting no later than slot m + $\frac{T_{HARQ} + T_{activtion_time} + T_{CSI_Reporting}}{NR\ slot\ length}$, where

- T_{HARQ} is defined in Table A.7.5.3.3.1-2

- $T_{activation_time}$ = 3ms + $T_{FirstSSB_MAX}$ + 15*T_{SMTC_MAX} + 8*T_{rs} + $T_{L1\text{-}RSRP,\ measure}$ + $T_{L1\text{-}RSRP,\ report}$ + max {(T_{HARQ} + $T_{uncertainty_MAC}$ + 5ms + $T_{FineTiming}$), ($T_{uncertainty_RRC}$ + T_{RRC_delay})}, which allows 1030ms

- $T_{CSI_Reporting}$ = 10ms

- NR slot length is 0.125ms for this test case.

During T2, the interruption of PCell during SCell activation shall not happen outside the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $m + 1 + \frac{T_{\text{HARQ}}+3\text{ms}+T_X}{\text{NR slot length}}$, where T_X =20ms.

During T3, the UE shall stop sending CSI reports for SCell no later than slot $n + \frac{T_{\text{HARQ}}+3\text{ms}}{NR\ slot\ length}$, as defined in clause 8.3.

During T3, the starting point of interruption of PCell during SCell deactivation shall not happen outside the slot $n + 1 + \frac{T_{\text{HARQ}}}{NR\ slot\ length}$ to $n + 1 + \frac{T_{\text{HARQ}}+3\text{ms}}{NR\ slot\ length}$ as defined in clause 8.3.

A.7.5.3.4 Direct SCell activation at SCell addition of known SCell in FR2

A.7.5.3.4.1 Test Purpose and Environment

The purpose of this test is to verify that the delay and interruption for direct SCell activation delay at SCell addition are within the requirements stated in clause 8.3.4.

The supported test configurations are shown in Table A.7.5.3.4.1-1 below. The general test parameters are given in Table A.7.5.3.4.1-2 and cell-specific test parameters in Table A.7.5.3.4.1-3. OTA related test parameters are shown in Table A.7.5.3.4.1-4.

The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are two FR2 carriers and two NR cells. Before the test starts the UE is connected to Cell 1 (PCell) on carrier #1, but is not aware of Cell 2 on NR carrier #2. Cell 1 and Cell 2 have constant signal levels throughout the test. The UE is monitoring the PCell. The UE shall be continuously scheduled in the PCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the Cell 2 is monitored by the UE. During T1, Cell 2 should be detected and measured by the UE such that it meets the condition for known cell defined in clause 8.3.4 for direct SCell activation.

Time period T2 starts when the *RRCReconfiguration* message for the configuration and activation of Cell 2 (the SCell), which is sent from the test equipment, is received at the UE antenna connector in a slot # denoted m. The test equipment shall set the parameter *sCellState* to *activated* for the SCell, which causes Cell 2 to become configured and activated.

Time period T3 starts at ($m + N_{direct}$), at which point UE shall be reporting a valid CQI for both PCell and SCell.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell during the activation of SCell. The test equipment verifies the activation time by counting the slots from the time when the SCell activation message is sent until a CQI report with other than CQI index 0 is received.

Table A.7.5.3.4.1-1: Supported test configurations

Configuration	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.7.5.3.4.1-2: General test parameters

Parameter	Unit	Value	Comment
RF Channel Number		1,2	Two NR radio channels (1,2) in FR2 are used for this test

Active PCell		Cell 1	Primary cell on NR RF channel number 1.
Configured and activated SCell		Cell 2	Configured and activated SCell on NR RF channel number 2.
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
SCell measurement cycle (measCycleSCell)	ms	160	
T1	s	7	During this time the measurement for Cell 2 is configured, and Cell 2 is detected.
T2	s	N_{direct}	During this time the UE shall configure and activate Cell 2 as SCell.
T3	ms	100	During this time the UE shall report valid CQI for both PCell and SCell.
T_{HARQ}	ms	k_1×NR slot length	k_1 is a number of slots indicated by the PDSCH-to-HARQ_feedback timing indicator field in a corresponding DCI format or provided by *dl-DataToUL-ACK* if the PDSCH-to-HARQ feedback timing field is not present in the DCI format, the value is defined in 38.213 [3]
k	slot	$k_1 + 3 \cdot N_{\text{slot}}^{\text{subframe},\ \mu} + 1$	As specified in clause 4.3 of TS 38.213 [3]

Table A.7.5.3.4.1-3: Cell specific test parameters

Parameter		Unit	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
SSB ARFCN			freq1			freq2		
Duplex mode	Config 1		TDD					
TDD configuration	Config 1		TDDConf.3.1					
$BW_{channel}$	Config 1	MHz	100: $N_{RB,c}$ = 66					
DL initial BWP configuration	Config 1		DLBWP.0.1					
DL dedicated BWP configuration	Config 1		DLBWP.1.1					
UL initial BWP configuration	Config 1		ULBWP.0.1					
UL dedicated BWP configuration	Config 1		ULBWP.1.1					
Timing offset to Cell 1		ms	Not Applicable			0		
PDSCH Reference measurement channel	Config 1		SR.3.1 TDD			SR.3.1 TDD		
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD			CR.3.1 TDD		
RMC CORESET Reference Channel	Config 1		CCR.3.1 TDD			CCR.3.1 TDD		
TRS configuration	Config 1		TRS.2.1 TDD			TRS.2.1 TDD		
CSI-RS configuration	Config 1		CSI-RS.3.1 TDD			CSI-RS.3.1 TDD		
CSI reporting periodicity	Config 1	ms	5			5		
OCNG Patterns			OP.1					
SMTC configuration			SMTC.1					

SSB configuration	Config 1		SSB.1 FR2	SSB.1 FR2
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
Propagation condition		-	AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				

Table A.7.5.3.4.1-4: OTA related test parameters

Parameter[Note 6]	Unit	Cell 1			Cell 2		
		T1	T2	T3	T1	T2	T3
Angle of arrival configuration		Setup 1 according to A.3.15.1					
Assumption for UE beams[Note 7]		Rough			Rough		
N_{oc} [Note1]	dBm/15kHz[Note4]	-112			-112		
N_{oc} [Note1]	dBm/SCS[Note3]	-102.97			-102.97		
$\hat{E}_s / N_{oc}$	dB	14			14		
SS-RSRP[Note2]	dBm/SCS [Note4]	-88.97			-88.97		
$\hat{E}_s / I_{ot}$	dB	14			14		
Io[Note2]	dBm/95.04 MHz [Note4]	-59.81			-59.81		

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone

Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone

Note 6: All parameters apply for configuration 1

Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.5.3.4.2 Test Requirements

During T2 the UE shall send the first CSI report for SCell in the first available uplink resource after slot (m+k). UE is allowed to postpone CSI report to next available UL resource if an available uplink resource is subject to interruption. Whether CSI report in a slot was interrupted is checked by monitoring ACK/NACK sent in PCell in the slot.

During T2 the UE shall start sending CSI reports for SCell with non-zero CQI index in the configured slots for CSI reporting no later than slot $m + \frac{N_{direct}}{NR\ slot\ length}$, where

$$N_{direct} = T_{RRC_Process} + T_1 + T_{activation_time} + T_{CSI_Reporting} - 3ms,$$

- $T_{RRC_Process}$ = 16ms, which is the RRC procedure delay defined for SCell addition in clause 12 of TS 38.331 [2],

- T_1 is the delay from slot m + $T_{RRC_Process}$ until the transmission of *RRCReconfigurationComplete* message,

- $T_{activation_time} = T_{FirstSSB}$+ 5ms = 25ms,

- $T_{CSI_Reporting}$ = 10ms

This gives a total of N_{direct} = 16 + T_1 + 25 + 10 - 3 = (48 + T_1) ms, and NR slot length is 0.125ms.

During T3 the UE shall send CSI reports for SCell with non-zero CQI index and continue to send CSI reports for SCell with non-zero CQI index until the end of T3.

During T2 interruption of PSCell during SCell activation shall not happen outside the window from slot *m*+1 to slot $m+1+\frac{T_{RRC_Process}+T_1+T_X}{NR\ slot\ length}$ as defined in clause 8.3.4, where T_X =20ms.

The interruption of PCell due to activation of SCell shall not be more than the values specified for NR SA in clause 8.2.2.2.11.

All of the above test requirements shall be fulfilled in order for the observed SCell activation delay to be counted as correct. The rate of correct observed SCell activation delay and SCell deactivation delay during repeated tests shall be at least 90%.

NOTE: During T2 if there are no uplink resources for reporting the valid CSI in a slot m + $\frac{N_{direct}}{NR\ slot\ length}$ as defined in clause 8.3.4 then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

A.7.5.3.5 Direct SCell activation at handover with known SCell in FR2

A.7.5.3.5.1 Test Purpose and Environment

This test is to verify the requirements specified in sub clause 8.3.5 for the FR2 handover with direct SCell activation.

The test scenario comprises of three FR2 cells, one source PCell (Cell 1), one target PCell (Cell 2) and one SCell (Cell 3). The test consists of three successive time periods, with time durations of T1, T2, and T3 respectively.

At the start of time duration T1, the UE is in connected mode with PCell (Cell 1). Both Cell 2 and Cell 3 are known to UE and UE is reporting CQI for all Cell 1.

Time period T2 starts when UE receives a handover command that initiate handover of UE to Cell2 and also activates Cell 3. This is done using an *RRCConnectionReconfiguration* message with parameter *sCellState* set to *activated* for the Cell 3. The message is sent from the test equipment to the UE and is received in a slot number n at the UE antenna connector. The UE shall accomplish the handover, addition and activation of the SCell no later than slot (n +$\frac{N_{direct}}{NR\ slot\ length}$).

Time period T3 starts at (n +$\frac{N_{direct}}{NR\ slot\ length}$), at which point UE shall be reporting a valid CSI for both Cell 2 and Cell 3 as given in tables A.7.5.3.5.1-1 and A.7.5.3.5.1-2.

Table A.7.5.3.5.1-1: Supported test configurations for FR2 handover with direct SCell activation case

Configuration	Description
1	SCell: NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode Source cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.5.3.5.1-2: General test parameters for FR2 handover with direct SCell activation case

Parameter		Unit	Value	Comment
RF Channel Number			1, 2, 3	Three NR radio channels are used for this test, Cell 1, Cell2 and Cell 3 use RF channel 1, 2 and 3 respectively.
A4-Offset		dBm	-120	
Time offset between cells			3 µs	Synchronous cells
Initial conditions	Source cell		Cell 1	Source Cell
	Target cell		Cell 2	Neighbour cell
	SCell		Cell 3	SCell is not added and activated
Final condition	Source cell		Cell 2	Cell 2 is Source cell after handover
	Neighbour cell		Cell 1	Neighbour cell
	SCell		Cell 3	SCell is added and activated

Table A.7.5.3.5.1-3: Cell specific test parameters for FR2 SCell activation case

Parameter[Note 5]	Unit	T1			T2			T3		
		Cell 1	Cell 2	Cell 3	Cell 1	Cell 2	Cell 3	Cell 1	Cell 2	Cell 3
SSB ARFCN		freq1	freq2	freq 3	freq1	freq2	freq 3	freq1	freq2	freq3
Duplex mode		TDD			TDD			TDD		
TDD configuration		TDDConf.3.1			TDDConf.3.1			TDDConf.3.1		
Downlink initial BWP Configuration		DLBWP.0.1			DLBWP.0.1			DLBWP.0.1		
Downlink dedicated BWP Configuration		DLBWP.1.1			DLBWP.1.1			DLBWP.1.1		
Uplink initial BWP configuration		ULBWP.0.1			ULBWP.0.1			ULBWP.0.1		
Uplink dedicated BWP configuration		ULBWP.1.1			ULBWP.1.1			ULBWP.1.1		
TRS configuration		TRS.2.1 TDD			TRS.2.1 TDD			TRS.2.1 TDD		
TCI state		TCI.State.0			TCI.State.0			TCI.State.0		
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66			100: $N_{RB,c}$ = 66			100: $N_{RB,c}$ = 66		
PDSCH Reference measurement channel		SR.3.1 TDD		-	SR.3.1 TDD		-	SR.3.1 TDD		
RMSI CORESET Parameters		CR.3.1 TDD		-	CR.3.1 TDD		-	CR.3.1 TDD		
Dedicated CORESET Parameters		CCR.3.1 TDD		-	CCR.3.1 TDD		-	CCR.3.1 TDD		
OCNG Patterns		OP.1								
SSB Configuration		SSB.1 FR2								
SMTC Configuration		SMTC.1								
PRACH configuration		FR2 PRACH configuration 1								
CSI-RS configuration for CSI reporting		CSI-RS.3.1 TDD								
reportConfigType		periodic		-	periodic		-	periodic		-
reportQuantity		cri-RI-PMI-CQI		-	cri-RI-PMI-CQI		-	cri-RI-PMI-CQI		-
CSI reporting periodicity	slot	40		-	40		-	40		-
CSI reporting offset	slot	4		-	4		-	4		-
EPRE ratio of PSS to SSS	dB	0								
EPRE ratio of PBCH_DMRS to SSS										
EPRE ratio of PBCH to PBCH_DMRS										
EPRE ratio of PDCCH_DMRS to SSS										

EPRE ratio of PDCCH to PDCCH_DMRS		
EPRE ratio of PDSCH_DMRS to SSS		
EPRE ratio of PDSCH to PDSCH_DMRS		
EPRE ratio of OCNG DMRS to SSS Note 1		
EPRE ratio of OCNG to OCNG DMRS Note 1		
Propagation conditions		AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: Void

Table A.7.5.3.5.1-4: OTA related test parameters for FR2 SCell activation case

Parameter Note 6	Unit	Cell 1			Cell 2			Cell 3		
		T1	T2	T3	T1	T2	T3	T1	T2	T3
Angle of arrival configuration		Setup 1 according to table A.3.15.1			Setup 1 according to table A.3.15.1			Setup 1 according to table A.3.15.1		
Assumption for UE beams Note 7		Rough			Rough			Rough		
N_{oc} Note1	dBm/15kHz Note4	-112			-112			-112		
N_{oc} Note1	dBm/SCS Note3	-102.97			-102.97			-102.97		
$\hat{E}_s / N_{oc}$	dB	14			14			14		
SS-RSRP Note2	dBm/SCS Note4	-88.97			-88.97			-88.97		
$\hat{E}_s / I_{ot}$	dB	14			14			14		
Io Note2	dBm/95.04 MHz Note4	-88.80			-88.80			-88.80		

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6: Void
Note 7: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.

A.7.5.3.5.2 Test Requirements

The UE shall be capable to transmit valid CSI report for PCell (Cell 2) and to the directly activated SCell1 no later than in slot n+ N_{direct}.

The SCell activation delay, N_{direct}, can be expressed as: $N_{direct} = T_{RRC_process} + T_{interrupt} + T_2 + T_3 + T_{activation_time} + T_{CSI_Reporting}$ - 3ms; Where:

- $T_{RRC_Process}$: RRC procedure delay defined in clause 12 of TS 38.331 and it is equal to 16ms,
- $T_{interrupt}$: Interruption time during handover as specified in clause 6.1.1. The value to be verified in the test is 52 ms ($T_{interrupt}$ = 0 ms for T_{search} + 10ms for T_{IU} + 20 ms for $T_{processing}$ + 20ms for T_{Δ} + 2 ms for T_{margin} ms) by assuming known SCell and SMTC.1 configuration.
- T_2: Delay from slot $n + \frac{T_{RRC_Process} + T_{interrupt}}{\text{NR slot length}}$ until UE has obtained a valid TA command for the target PCell,
- T_3: Delay for applying the received TA for uplink transmission in the target PCell, and greater than or equal to k+1 slot, where k is defined in clause 4.2 in TS 38.213,
- $T_{activation_time}$ and $T_{CSI_Reporting}$ are specified in clause 8.3.2, where the following definitions of $T_{FirstSSB}$ and $T_{FirstSSB_MAX}$ as defined in section 8.3.5 shall apply:

During time period T2 of the test, the UE shall start sending CSI reports for SCell with non-zero CQI index at latest in a slot $n + \frac{T_{HARQ} + T_{activtion_time} + T_{CSI_Reporting}}{NR\ slot\ length}$, $T_{activation_time} = T_{SMTC_SCell}$ + 5ms, as defined in clause 8.3.

During time period T3 of the test, the UE shall stop sending CSI reports for SCell at latest in a slot $m + \frac{T_{HARQ} + 3ms}{NR\ slot\ length}$, as defined in clause 8.3.

During time period T2 of the test, interruption of PCell / PSCell during SCell activation shall not happen outside the slot $n + 1 + \frac{T_{HARQ}}{\text{NR slot length}}$ to $n + 1 + \frac{T_{HARQ} + 3ms + T_X}{\text{NR slot length}} + N_{interruption}$, as defined in clause 8.3.

During time period T3 of the test, the starting point of interruption of PCell during SCell deactivation shall not happen outside the slot $m + 1 + \frac{T_{HARQ}}{NR\ slot\ length}$ to $m + 1 + \frac{T_{HARQ} + 3ms}{NR\ slot\ length}$, as defined in clause 8.3.

The interruption on any activated serving cell shall not be more than the values specified for SA in clause 8.2.2.2.2.

All of the above test requirements shall be fulfilled in order for the observed SCell activation delay and SCell deactivation delay to be counted as correct. The rate of correct observed SCell activation delay and SCell deactivation delay during repeated tests shall be at least 90%.

NOTE: During time period T2 of the test, if there are no uplink resources for reporting the valid CSI in a slot $\frac{T_{HARQ} + T_{activtion_time} + T_{CSI_Reporting}}{NR\ slot\ length}$ as defined in clause 8.3 then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

A.7.5.3.6 PUCCH SCell activation and deactivation for FR1+FR2 inter-band with target SCell in FR2 and known

A.7.5.3.6.1 Test Purpose and Environment

The purpose of this test is to verify that the PUCCH SCell activation and deactivation times are within the requirements stated in clause 8.3.12 and 8.3.14, when the PUCCH SCell in FR2 is known by the UE at the time of activation.

The supported test configurations are shown in table A.7.5.3.6.1-1 below. The test parameters are given in Tables A.7.5.3.6.1-2 and cell-specific parameters in A.7.5.3.6.1-3 below. The test consists of four successive time periods, with duration of T1, T2 T3, and T4 respectively. There are two NR carriers, each with one cell. Both cells have constant signal levels throughout the test. Before the test starts the UE is connected to Cell 1 but is not aware of Cell2. The UE is only monitoring the PCC. The UE shall be continuously scheduled in the PCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the PUCCH SCell (Cell 2) becomes configured on radio channel 2. The UE now starts monitoring the SCC. The test equipment sends a MAC message for activation of the PUCCH SCell.

The point in time at which the MAC message is received at the UE antenna connector, in slot # denoted n, defines the start of time period T2. The UE shall be able to report valid CSI for the activated PUCCH SCell at latest in slot $n+\frac{T_{HARQ}+T_{delay_multiple_SCells_PUCCH_SCell}}{NR\ slot\ length}$, and report valid CSI for the activated DL SCell at latest in slot $n+\frac{T_{HARQ}+T_{delay_multiple_SCells_other_SCell}}{NR\ slot\ length}$, as defined in clause 8.3.13. In this test case, both valid TA and invalid TA cases shall be tested.

Test for case when UE has valid TA: the *TimeAlignmentTimer* [2] associated with the TAG containing the PUCCH SCell is running, and $T_{delay_multiple_SCells_PUCCH_SCell} = T_{activation_time_multiple_scells} + [X]*T_{target_PL_RS} + T_{CSI_Reporting}$.

Test for case when UE do not have valid TA: $T_{delay_multiple_SCells_PUCCH_SCell} = T_{activation_time_multiple_scells} + \max((T_{First_available_CSI} + T_{CSI_processing}), [X]*T_{target_PL_RS}, (T1+T2+T3)) + T_{CSI_reporting_after}$

$T_{activation_time_multiple_scells}$ is the target SCell activation delay in millisecond in multiple SCell activation scenario as specified in section 8.3.7

Any PCell interruption due to activation of PUCCH SCell shall occur in the slot $n + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $n + 1 + \frac{T_{\text{HARQ}}+3\text{ms}+T_{\text{X}}}{\text{NR slot length}} + N_{\text{interruption}}$, as defined in clause 8.3, where $N_{\text{interruption}}$ is the interruption length given in clause 8.2

Time period T3 starts when a MAC message for deactivation of PUCCH SCell abd DL SCell, sent from the test equipment to the UE in a slot # denoted m, is received at the UE antenna connector. The UE shall carry out deactivation of the SCell in a slot $\text{m} + \frac{\text{T}_{\text{HARQ}}+3ms}{NR\ slot\ length}$, as defined in clause 8.3.14and the starting point of any PCell interruption due to the deactivation shall occur in the slot $\text{m} + 1 + \frac{\text{T}_{\text{HARQ}}}{NR\ slot\ length}$ to $\text{m} + 1 + \frac{\text{T}_{\text{HARQ}}+3\text{ms}}{NR\ slot\ length}$, as defined in clause 8.3.14.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell during activation and deactivation of PUCCH SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report is received.

The test equipment verifies the deactivation time by counting the slots from the time when the SCell deactivation command is sent until CQI reporting for SCell is discontinued.

Table A.7.5.3.6.1-1: Supported test configurations for FR2 SCell activation case

Configuration	Description
1	PCell: 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode Target SCell: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
2	PCell: 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode Target SCell: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
3	PCell: 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode Target SCell: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations	

Table A.7.5.3.6.1-2: Cell specific test parameters for FR2 SCell activation case

Parameter Note 5	Unit	Cell 1				Cell 2			
		T1	T2	T3	T4	T1	T2	T3	T4
SSB ARFCN		Freq1				Freq2			

Duplex mode	Config 1		FDD			TDD			
	Config 2,3		TDD						
TDD configuration	Config 1		Not Applicable			TDDConf.3.1			
	Config 2		TDDConf.1.1						
	Config 3		TDDConf.2.1						
Downlink initial BWP Configuration	Config 1,2,3		DLBWP.0.1						
Downlink dedicated BWP Configuration	Config 1,2,3		DLBWP.1.1						
Uplink initial BWP configuration	Config 1,2,3		ULBWP.0.1						
Uplink dedicated BWP configuration	Config 1,2,3		ULBWP.1.1						
TRS configuration	Config 1,2,3		N/A			TRS.2.1 TDD			
TCI state	Config 1,2,3		TCI.State.0						
$BW_{channel}$	Config 1,2	MHz	10: $N_{RB,c}$ = 52			100: $N_{RB,c}$ = 66			
	Config 3		40: $N_{RB,c}$ = 106						
Data RBs allocated	Config 1,2		52	66	52	66	52	66	
	Config 3		106		106		106		
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD			-			
	Config 2		SR.1.1 TDD						
	Config 3		SR.2.1 TDD						
RMSI CORESET Parameters	Config 1		CR.1.1 FDD			-			
	Config 2		CR.1.1 TDD						
	Config 3		CR.2.1 TDD						
Dedicated CORESET Parameters	Config 1		CCR.1.1 FDD			-			
	Config 2		CCR.1.1 TDD						
	Config 3		CCR.2.1 TDD						
OCNG Patterns			OP.1						
SSB configuration	Config 1,2		SSB.1 FR1			SSB.3 FR2			
	Config 3		SSB.2 FR1						
CSI-RS configuration for CSI reporting	Config 3		N/A			CSI-RS.3.1 TDD			
reportConfigType for CSI reporting						periodic			
reportQuantity for CSI reporting						cri-RI-PMI-CQI			
CSI reporting periodicity	Config 3	slot				40			
CSI reporting offset	Config 3	slot				8			
SMTC configuration			SMTC.1						
EPRE ratio of PSS to SSS		dB	0						
EPRE ratio of PBCH_DMRS to SSS									
EPRE ratio of PBCH to PBCH_DMRS									
EPRE ratio of PDCCH_DMRS to SSS									
EPRE ratio of PDCCH to PDCCH_DMRS									
EPRE ratio of PDSCH_DMRS to SSS									
EPRE ratio of PDSCH to PDSCH_DMRS									
EPRE ratio of OCNG DMRS to SSS Note 1									
EPRE ratio of OCNG to OCNG DMRS Note 1									
Propagation conditions			N/A Link only, see clause A.3.7A			AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: Void
Note 4: Void
Note 5: All parameters apply for configuration 1, 2 and 3

Table A.7.5.3.6.1-3: OTA related test parameters for FR2 SCell with FR1 PCell

Parameter		Unit	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Angle of arrival configuration			N/A			According to clause A.3.15.1		
Assumption for UE beams Note 7			N/A			Rough		
N_{oc} Note 1	Config 1,2,3	dBm/15kHz	Link only, see clause A.3.7A			-104.7		
N_{oc} Note 1	Config 1,2,3	dBm/SCS				-95.7		
$\hat{E}_s / N_{oc}$	Config 1,2,3	dB				-∞	7	7
	Config 1,2,3	dB				-∞	7	7
SSB_RP Note 2, Note 4	Config 1,2,3	dBm/SCS				-∞	-88.7	-88.7
Io Note 2, Note 4	Config 1,2,3	dBm/95.04 MHz				-66.68	-58.92	-58.92

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: Void
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: Void
Note 6: Void
Note 7: Information about types of UE beam is given in B.2.1.3 and does not imit UE implementation or test system implementation.

A.7.5.3.6.2 Test Requirements

By end of T2 the UE shall finish the DL activation for the PUCCH SCell. Assuming the periodic CSI reporting is used and assuming periodic CSI activation and TCI state is sent along with SCell activation MAC CE, UE shall finish the DL activation by slot n+ 10ms + T_{HARQ} + $T_{FineTiming}$

With SSB periodicity of 20ms, UE shall complete DL activation of PUCCH SCell with in 30ms after transmitting HARQ message for SCell activation command.

During T2 the UE shall start sending PRACH preamble to TE and shall obtain the TA command from TA and shall be ready to send valid CSI report to the TE. CSI report shall be transmitted within 30ms + [X=0] + max (($T_{First_available_CSI}$ + $T_{CSI_processing}$), (T1+T2+T3)) + $T_{CSI_reporting_after}$ from the transmission of HARQ feedback of SCell activation command as specified in the 8.3.12.

During T3 the UE shall stop sending CSI reports for both SCells no later than slot n + $\frac{T_{HARQ}+3ms}{NR\ slot\ length}$, as defined in clause 8.3.

During T2 interruption of PCell during SCell activation shall not happen outside the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $m + 1 + \frac{T_{\text{HARQ}} + 3\text{ms} + T_X}{\text{NR slot length}}$, as defined in clause 8.3, where T_X =20ms.

During T3 the starting point of interruption of PCell during SCell deactivation shall not happen outside the slot n + $1 + \frac{T_{\text{HARQ}}}{NR\ slot\ length}$ to n + 1 + $\frac{T_{\text{HARQ}} + 3\text{ms}}{NR\ slot\ length}$, as defined in clause 8.3.

The interruption of PCell due to activation of SCell shall not be more than the values specified for SA in Clause 8.2.2.2.7.

A.7.5.3.7 PUCCH SCell activation and deactivation delay requirements of FR2 unknown cell with FR1 PCell

A.7.5.3.7.1 Test Purpose and Environment

The purpose of this test case is the same as for the test defined in clause A.7.5.3.7.1 except the PUCCH SCell in FR2 is unknown.

The supported test configurations and the general test parameters are defined in Table A.7.5.3.7.1-1 and Table A.7.5.3.7.1-2, respectively. And cell specific test parameters are described in Tables A.7.5.3.7.1-3. OTA related test parameters are defined in Table A.7.5.3.7.1-4. In all test cases, two cells are used. Cell 1 is the FR1 PCell in the primary Timing Advance Group (pTAG) and cell 2 is the FR2 PUCCH SCell in the secondary Timing Advance Group (sTAG).

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 2) becomes configured on NR. During T1 the SCell is powered off and UE is not aware of SCell.

A MAC message for activation of SCell is sent by the test equipment T1 after the RRC message, in a slot # denoted m. The point in time at which the MAC message for activation of SCell is received at the UE antenna connector defines the start of time period T2. At the time of T2, the UE does not have a valid TA for the SCell in sTAG. Immediately at the beginning of T2 the transmission power of Cell 2 is increased to same level as for cell 2

During T2, the test equipment monitors the L1-RSRP measurement result for the SCell reported on the PCell. The time when test equipment receives a valid L1-RSRP report is denoted as slot $m+T_{L1\text{-}RSRP}$. In the next DL slot after slot $m+T_{L1\text{-}RSRP}$, the test equipment sends a MAC message for the activation of the TCI state of the RMC CORESET of the SCell and PUCCH-SpatialRelation of the SCell. In the same slot, the test equipment also sends an RRC message to configure the CSI-RS resources for SCell. $T_{HARQ} + T_{activation_time}$ after slot m, the UE shall be able to monitor PDCCH on the SCell that triggers PDCCH order-based contention-free PRACH. The test equipment receives the PRACH and sends random access response with Timing Advance Command MAC Control Elements for sTAG, with Timing Advance Command value estimated from the PRACH. The UE shall start reporting CSI of the SCell with non-zero CQI index via PUCCH on the SCell no later than slot m + $(T_{HARQ} + T_{delay_PUCCH_SCell})$/NR slot length. Here, $T_{activation_time}$ is the SCell activation delay defined in 8.3.2 for FR2 unknown SCell with periodic CSI-RS used for CSI reporting, and $T_{delay_PUCCH_SCell}$ is the PUCCH SCell activation delay defined in 8.3.12 for an invalid TA scenario.

Time period T3 starts when a MAC message for deactivation of the SCell, sent from the test equipment to the UE in a slot # denoted n, is received at the UE antenna connector.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell during the activation of the SCell.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The test equipment verifies the deactivation time by counting the slots from the time when the SCell deactivation command is sent until CSI reporting on the SCell is discontinued.

Table A.7.5.3.7.11: Supported test configurations for FR2 SCell activation case

Configuration	Description
1	PCell: 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode Target SCell: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
2	PCell: 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode Target SCell: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
3	PCell: 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode Target SCell: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations	

Table A.7.5.3.7.1-2: General test parameters for unknown FR2 PUCCH SCell activation case

Parameter	Unit	Value	Comment
RF Channel Number		1,2	Two NR radio channel (1, 2) are used for this test
Active PCell		Cell 1	Primary cell on NR RF channel number 1.
Configured deactivated PUCCH SCell		Cell 2	Configured deactivated secondary cell on NR RF channel number 2
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
Cell-individual offset for cells on NR channel number	dB	0	Individual offset for cells on primary component carrier.
SCell measurement cycle (measCycleSCell)	ms	160	
Cell2 timing offset to cell1	µs	≤25	A random value from 0µs to 25µs
T1	s	7	During this time the PCell shall be known and the SCell configured and detected.
T2	s	2	During this time the UE shall activate the SCell.
T3	s	1	During this time the UE shall deactivate the SCell.
T_{HARQ}	ms	Config 1: 2 Config 2: 3 Config 3: 2.5	k_1×NR slot length k_1 is a number of slots and is indicated by the PDSCH-to-HARQ-timing-indicator field in the DCI format, if present, or provided by *dl-DataToUL-ACK*, the value of k should be the minimum value defined in TS 38.213 [3] that will meet the timing constraints of this test case.
$T_{CSI_Reporting}$	ms	15	the delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting (clause 5.2.2.5 in TS 38.214) and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2] and TS 38.213 [3].

Table A.7.5.3.7.1-3: Cell specific test parameters for FR2 PUCCH SCell activation case

Parameter[Note 5]		Unit	Cell 1			Cell 2		
			T1	T2			T1	T2
SSB ARFCN			Freq1			Freq2		
Duplex mode	Config 1		FDD			TDD		

	Config 2,3		TDD		
TDD configuration	Config 1		Not Applicable	TDDConf.3.1	
	Config 2		TDDConf.1.1		
	Config 3		TDDConf.2.1		
Downlink initial BWP Configuration	Config 1,2,3		DLBWP.0.1		
Downlink dedicated BWP Configuration	Config 1,2,3		DLBWP.1.1		
Uplink initial BWP configuration	Config 1,2,3		ULBWP.0.1		
Uplink dedicated BWP configuration	Config 1,2,3		ULBWP.1.1		
TRS configuration	Config 1,2,3		N/A	TRS.2.1 TDD	
TCI state	Config 1,2,3		TCI.State.0		
PUCCH Spatial Relation	Config 1,2,3		N/A	PUCCH.SRI.0	
$BW_{channel}$	Config 1,2	MHz	10: $N_{RB,c}$ = 52	100: $N_{RB,c}$ = 66	
	Config 3		40: $N_{RB,c}$ = 106		
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	SR.3.1 TDD	
	Config 2		SR.1.1 TDD		
	Config 3		SR.2.1 TDD		
RMSI CORESET Parameters	Config 1		CR.1.1 FDD	-	
	Config 2		CR.1.1 TDD		
	Config 3		CR.2.1 TDD		
Dedicated CORESET Parameters	Config 1		CCR.1.1 FDD	CCR.3.1 TDD	
	Config 2		CCR.1.1 TDD		
	Config 3		CCR.2.1 TDD		
OCNG Patterns			OP.1		
SSB configuration	Config 1,2		SSB.1 FR1	SSB.3 FR2	
	Config 3		SSB.2 FR1		
CSI-RS configuration for CSI reporting	Config 1,2,3		N/A	N/A	CSI-RS.3.1 TDD Note 6 / CSI-RS.3.1 TDD
TimeAlignmentTimer for pTAG	Config 1,2,3		ms500	N/A	
TimeAlignmentTimer for sTAG	Config 1,2,3		N/A	ms500	
reportConfigType for CSI reporting			-	Periodic	
reportConfigType for L1-RSRP			periodic	-	
reportQuantity for CSI reporting			-	cri-RI-PMI-CQI	
reportQuantity for L1-RSRP			ssb-Index-RSRP	-	
CSI reporting periodicity	Config 1,2	slot	-	40	
	Config 3		-		
L1-RSRP reporting periodicity Note 7	Config 1,2	slot	5	-	
	Config 3		10		
CSI reporting offset	Config 1,2	slot	-	4	
	Config 3		-		
L1-RSRP reporting offset	Config 1,2	slot	2	-	
	Config 3		4		
SMTC configuration			SMTC.1		
EPRE ratio of PSS to SSS		dB	0		
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					

EPRE ratio of PDSCH_DMRS to SSS EPRE ratio of PDSCH to PDSCH_DMRS EPRE ratio of OCNG DMRS to SSS Note 1 EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation conditions		N/A Link only, see clause A.3.7A	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: Void
Note 4: Void
Note 5: Void
Note 6: CSI-RS for CSI measurement is (re)configured in the next DL slot after slot m+$T_{L1\text{-}RSRP}$ during T2.
Note 7: L1-RSRP measurement and reporting are configured to the the UE prior to the start of time period T1.

Table A.7.5.3.7.1-4: OTA related test parameters for FR2 PUCCH SCell activation

Parameter		Unit	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Angle of arrival configuration			N/A			According to clause A.3.15.1		
Assumption for UE beams Note 7			N/A			Rough		
N_{oc} Note 1	Config 1,2,3	dBm/15kHz	Link only, see clause A.3.7A			-104.7		
N_{oc} Note 1	Config 1,2,3	dBm/SCS				-95.7		
$\hat{E}_s / N_{oc}$	Config 1,2,3	dB				-∞	7	7
$\hat{E}_s / I_{ot}$	Config 1,2,3	dB				-∞	7	7
SSB_RP Note 2, Note 4	Config 1,2,3	dBm/SCS				-∞	-88.7	-88.7
Io Note 2, Note 4	Config 1,2,3	dBm/95.04 MHz				-66.68	-58.92	-58.92

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: Void
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: Void
Note 6: Void
Note 7: Information about types of UE beam is given in B.2.1.3 and does not imit UE implementation or test system implementation.

A.7.5.3.7.2 Test Requirements

During T2 the UE shall start sending a valid L1-RSRP report of the SCell to the PCell in the configured slots for CSI reporting after slot (m+$T_{L1\text{-}RSRP}$), where $T_{L1\text{-}RSRP}$ is no larger than 3ms + $T_{FirstSSB_MAX}$ + 15*T_{SMTC_MAX} + 8*T_{rs} + $T_{L1\text{-}RSRP,\ measure}$ + $T_{L1\text{-}RSRP,\ report}$ as defined in clause 8.3.2.

During T2 the UE shall start sending CSI reports of the SCell with non-zero CQI index via PUCCH on the SCell in the configured slots for CSI reporting no later than slot m + $\frac{T_{HARQ} + T_{delay_PUCCH_SCell}}{NR\ slot\ length}$ as defined in clause 8.3.12.

During T3 the UE shall stop sending CSI reports on the SCell no later than slot n + $\frac{\mathrm{T_{HARQ}+3ms}}{NR\ slot\ length}$, as defined in clause 8.3.14.

During T2 interruption of PCell during the SCell activation shall not happen outside the slot $m + 1 + \frac{T_{\mathrm{HARQ}}}{\mathrm{NR\ slot\ length}}$ to $m + 1 + \frac{T_{\mathrm{HARQ}}+3\mathrm{ms}+T_{\mathrm{X}}}{\mathrm{NR\ slot\ length}}$, as defined in clause 8.3, where T_X =20ms. If the UE is not capable of parallelTxPRACH-SRS-PUCCH-PUSCH additional interruption can be allowed as defined in Clause 8.2.2.2.18.

During T3 the starting point of interruption of PCell during SCell deactivation shall not happen outside the slot n + $1 + \frac{\mathrm{T_{HARQ}}}{NR\ slot\ length}$ to n + $1 + \frac{\mathrm{T_{HARQ}+3ms}}{NR\ slot\ length}$, as defined in clause 8.3.14.

The interruption of PCell due to activation of SCell shall not be more than the values specified for SA in Clause 8.2.2.2.18.

A.7.5.3.8 SCell Activation and deactivation for known PUCCH SCell in FR2 inter-band in non-DRX

A.7.5.3.8.1 Test Purpose and Environment

The purpose of this test is to verify that the SCell activation and deactivation times are within the requirements specified in clause 8.3, when PUCCH for a being activated SCell is configured on the SCell. The PCell and SCell are inter-band in FR2 and the SCell is known by a UE. The test shall be performed for the cases respectively where UE has valid TA and where UE does not have valid TA for an sTAG which the SCell belongs to at the time of activation.

The supported test configurations are shown in table A.7.5.3.8.11-1 below. The general test parameters are described in Tables A.7.5.3.8.1-2, and cell specific test parameters are described in Tables A.7.5.3.8.1-3. OTA related test parameters are shown in table A.7.5.3.8.1-4 below.

The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are two NR carriers, each with one cell. Both cells have constant signal levels throughout the test. The UE shall be continuously scheduled in the PCell (Cell 1) throughout the whole test.

Before the test starts, the UE is connected to the Cell 1 (PCell) on radio channel 1 but is not aware of Cell 2 (SCell) on radio channel 2. The PCell is in the pTAG and the SCell is in an sTAG. The UE is only monitoring the PCell.

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 2) becomes configured with PUCCH on radio channel 2. The UE now starts monitoring the Cell 2. During T1, Cell 2 should be detected and measured by the UE such that it meets the condition for known cell defined in clause 8.3.2 for SCell activation.

A MAC message for activation of SCell is sent by the test equipment in a slot # denoted m. The point in time at which the MAC message for activation of SCell is received at the UE antenna connector defines the start of time period T2.

During T2,

- When the UE has a valid TA, the UE shall be able to report valid CSI for the activated SCell no later than in slot n+$\frac{T_{HARQ}+T_{activation_time}+[X]*T_{target_PL-RS}+T_{CSI_Reporting}}{NR\ slot\ length}$, as defined in clause 8.3.12.
- When the UE does not have a valid TA, the test equipment should send a PDCCH order to the UE to initiate RA procedure on the PUCCH SCell no later than in slot n+$\frac{T_{HARQ}+T_{activation_time}}{NR\ slot\ length}$, and the UE shall be able to

report valid CSI for the activated SCell no later than in slot n + $\frac{T_{HARQ}+T_{delay_PUCCH_SCell}}{NR\ slot\ length}$, as defined in clause 8.3.12.

Time period T3 starts when a MAC message for deactivation of SCell, sent from the test equipment to the UE in a slot # denoted n, is received at the UE antenna connector. The UE shall carry out deactivation of the SCell in a slot n + $\frac{T_{HARQ}+3ms}{NR\ slot\ length}$, as defined in clause 8.3, and the starting point of any PCell interruption due to the deactivation shall occur in the slot m + 1 + $\frac{T_{HARQ}}{NR\ slot\ length}$ to m + 1 + $\frac{T_{HARQ}+3ms}{NR\ slot\ length}$, as defined in clause 8.3.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell during activation and the deactivation of SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received from the PUCCH SCell.

The test equipment verifies the deactivation time by counting the slots from the time when the SCell deactivation command is sent until CQI reporting from the PUCCH SCell is discontinued.

Table A.7.5.3.8.1-1: Supported test configurations for FR2 PUCCH SCell activation in FR2 inter-band

Configuration	Description
1	NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode

Table A.7.5.3.8.1-2: General test parameters for known PUCCH SCell activation in FR2 inter-band

Parameter	Unit	Value	Comment
RF Channel Number		1, 2	Two NR radio channels are used for this test. RF channel number 1 is in band 1 and RF channel number 2 is in band 2, where bands 1 and 2 are inter-band CA operating bands in FR2 as specified in Table 5.2A.2-1 in TS38.101-2.
Active PCell		Cell1	PCell on NR RF channel number 1.
Configured PUCCH SCell		Cell2	Configured PUCCH SCell on NR RF channel number 2.
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
CQI/PMI periodicity and offset configuration index		0	CQI reporting for SCell every second subframe
Cell-individual offset for cells on NR channel number	dB	0	Individual offset for cells on primary component carrier.
SCell measurement cycle (measCycleSCell)	ms	160	
Cell2 timing offset to cell1	µs	≤8	A random value from 0µs to 8µs
Filter coefficient		0	L3 filtering is not used
T_{HARQ}	ms	k_1×NR slot length	k_1 is a number of slots and is indicated by the PDSCH-to-HARQ-timing-indicator field in the DCI format, if present, or provided by *dl-DataToUL-ACK*, the value of k should be the minimum value defined in TS 38.213 [3] depends on UE's capability
$T_{CSI_Reporting}$	ms	2	the delay uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2]
T1	s	7	During this time the PUCCH SCell shall be configured and detected.
T2	s	2	During this time the UE shall activate the PUCCH SCell.

T3	s	1	During this time the UE shall deactivate the PUCCH SCell.
TimeAlignmentTimer	ms	1280	Cell 1 in pTAG.
TimeAlignmentTimerSTAG	ms	[1280]	Cell 2 in sTAG.

Table A.7.5.3.8.1-3: Cell specific test parameters for FR2 PUCCH SCell activation in FR2 inter-band

Parameter[Note 5]	Unit	T1		T2		T3	
		Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN		freq1	freq2	freq1	freq2	freq1	freq2
Duplex mode		TDD		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1		TDDConf.3.1	
Downlink initial BWP Configuration		DLBWP.0.1		DLBWP.0.1		DLBWP.0.1	
Downlink dedicated BWP Configuration		DLBWP.1.1		DLBWP.1.1		DLBWP.1.1	
Uplink initial BWP configuration		ULBWP.0.1		ULBWP.0.1		ULBWP.0.1	
Uplink dedicated BWP configuration		ULBWP.1.1		ULBWP.1.1		ULBWP.1.1	
TRS configuration		TRS.2.1 TDD		TRS.2.1 TDD		TRS.2.1 TDD	
TCI state		TCI.State.0		TCI.State.0		TCI.State.0	
Spatial Relation Configuration		PUCCH.SRI.0		PUCCH.SRI.0		PUCCH.SRI.0	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Parameters		CR.3.1 TDD	-	CR.3.1 TDD	-	CR.3.1 TDD	-
Dedicated CORESET Parameters		CCR.3.1 TDD	-	CCR.3.1 TDD	-	CCR.3.1 TDD	-
CSI-RS configuration		NA	NA	NA	CSI-RS.3.1 TDD Note 2	NA	CSI-RS.3.1 TDD
CSI reporting periodicity [Note 3]		NA	5	NA	5	NA	5
PRACH configuration		-	-	-	FR2 PRACH configuration 2	-	FR2 PRACH configuration 2
OCNG Patterns		OP.1					
SSB Configuration		SSB.1 FR2					
SMTC Configuration		SMTC.1					
EPRE ratio of PSS to SSS	dB	0					
EPRE ratio of PBCH_DMRS to SSS							
EPRE ratio of PBCH to PBCH_DMRS							
EPRE ratio of PDCCH_DMRS to SSS							
EPRE ratio of PDCCH to PDCCH_DMRS							
EPRE ratio of PDSCH_DMRS to SSS							
EPRE ratio of PDSCH to PDSCH_DMRS							
EPRE ratio of OCNG DMRS to SSS[Note 1]							
EPRE ratio of OCNG to OCNG DMRS [Note 1]							
Propagation conditions		AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: CSI-RS for CSI measurement is (re)configured in the next DL slot after slot $m+T_{L1\text{-}RSRP}$ during T2.
Note 3: L1-RSRP measurement and reporting are configured to the the UE prior to the start of time period T1.

Table A.7.5.3.8.1-4: OTA related test parameters for FR2 SCell activation in FR2 inter-band

Parameter[Note 6]	Unit	Cell 1			Cell 2		
		T1	T2	T3	T1	T2	T3
AoA setup		Setup 3 as specified in clause A.3.15					
		AoA1			AoA2		
Assumption for UE beams [Note 7]		Rough			Rough		
N_{oc} [Note1]	dBm/15kHz[Note4]	-92.1			-92.1		
N_{oc} [Note1]	dBm/SCS[Note3]	-83.1			-83.1		
$\hat{E}_s / N_{oc}$	dB	0			0		
SS-RSRP[Note2]	dBm/SCS [Note4]	-83.1			-83.1		
$\hat{E}_s / I_{ot}$	dB	0			0		
Io[Note2]	dBm/95.04 MHz [Note4]	-51.1			-51.1		

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6: All parameters apply for configuration 1
Note 7: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.

A.7.5.3.8.2 Test Requirements

During T2, when the UE has valid TA, the UE shall start sending CSI report for the SCell with non-zero CQI index on the PUCCH SCell no later than in slot $n+\frac{T_{HARQ}+T_{activation_time}+[X]*T_{target_PL-RS}+T_{CSI_Reporting}}{NR\ slot\ length}$, where $T_{activation_time}$ is $\max(T_{uncertainty_MAC} + 5ms + T_{FineTiming}, T_{uncertainty_RRC} + T_{RRC_delay}-T_{HARQ})$ as defined in clause 8.3.2, which allows 5ms.

If the UE has a valid TA for transmitting on the SCell, during T2, the UE shall start sending CSI reports for the SCell with non-zero CQI index in the configured slots for CSI reporting on PUCCH SCell no later than slot $m + \frac{T_{HARQ}+T_{activtion_time}+[X]*T_{target_PL-RS}+T_{CSI_Reporting}}{NR\ slot\ length}$, where

- T_{HARQ} is defined in Table A.4.5.3.1.1-2
- $T_{activation_time} = \max(T_{uncertainty_MAC} + 5ms + T_{FineTiming}, T_{uncertainty_RRC} + T_{RRC_delay}-T_{HARQ})$, which allows 5ms
- $T_{CSI_Reporting} = 10ms$
- NR slot length is 0.125ms for this test case.

If the UE does not have a valid TA for transmitting on the SCell, during T2, the UE shall start sending CSI reports for the SCell with non-zero CQI index in the configured slots for CSI reporting no later than slot m + $\frac{T_{HARQ}+T_{delay_PUCCH_SCell}}{NR\ slot\ length}$, where

- T_{HARQ} is defined in Table A.4.5.3.1.1-2
- $T_{delay_PUCCH_SCell} = T_{activation_time} + \max((T_{First_available_CSI} + T_{CSI_processing}), (T1+T2+T3), [X]*T_{target_PL\text{-}RS}) + T_{CSI_reporting_after}$
- FFS the value of T1+T2+T3 and $T_{CSI_reporting_after}$
- NR slot length is 0.125ms for this test case.

During T2 interruption of PCell / PSCell during SCell activation shall not happen outside the slot $m + 1 + \frac{T_{HARQ}}{\text{NR slot length}}$ to $m + 1 + \frac{T_{HARQ}+3ms+T_X}{\text{NR slot length}} + N_{interruption}$, as defined in clause 8.3.

During T3 the UE shall stop sending CSI reports for SCell at latest in a slot n+ $\frac{T_{HARQ}+3ms}{NR\ slot\ length}$, as defined in clause 8.3.

During T3 the starting point of interruption of PCell during SCell deactivation shall not happen outside the slot n + $1 + \frac{T_{HARQ}}{NR\ slot\ length}$ to n + $1 + \frac{T_{HARQ}+3ms}{NR\ slot\ length}$, as defined in clause 8.3.

A.7.5.3.9 PUCCH SCell Activation and deactivation of unknown SCell in FR2

A.7.5.3.9.1 Test Purpose and Environment

The purpose of this test is to verify that SCell activation and deactivation are done within the required time period defined in clause 8.3.12, when PUCCH for a being activated SCell is configured on the NR FR2 SCell. The PCell and SCell are in different FR2 band. The SCell is unknown by the UE and the UE does not have valid TA for a sTAG which the SCell belongs to at the time of activation. Supported test configurations are shown in table A.7.5.3.9.1-1.

The general test parameters and NR cell specific test parameters are given in Table A.7.5.3.9.1-2 and A.7.5.3.9.1-3 below. OTA related test parameters are shown in table A.7.5.3.9.1-4 below.

In the test there are two cells: Cell1 and Cell2. Cell1 is PCell, Cell2 is the PUCCH SCell being activated and deactivated. The test consists of three successive time periods with duration of T1, T2 and T3, respectively. The UE shall be continuously scheduled in Cell1 (PCell) throughout the test.

Before the test starts, the UE is connected to the PCell (Cell 1) on NR radio channel 1 (PCC), but is not aware of SCell (Cell2) on NR radio channel 2 (SCC). The PCell is in the pTAGs and the SCell is in a sTAG. The UE is only monitoring the PCC.

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 2) gets configured with PUCCH on NR radio channel 2 (SCC). The UE now starts monitoring the SCC2 also. Test equipment sends a MAC message for activation of the SCell. The MAC message for the activation is received at the UE antenna connector at slot # denoted m, which is defined as the start of time period T2.

Immediately at beginning of T2 the transmission power of Cell 2 is increased to same level as for Cell 1. During T2, the test equipment monitors the L1-RSRP measurement reporting for the SCell. The time when test equipment receives a valid L1-RSRP report is denoted as slot $m+T_{L1\text{-}RSRP}$. In the next DL slot after slot $m+T_{L1\text{-}RSRP}$, the test equipment sends a MAC message for the activation of the TCI state of the RMC CORESET of the SCell. In the same slot, the test equipment also sends an RRC message to configure the CSI-RS resources for SCell. During T2,

the test equipment should send a PDCCH order to the UE to initiate RA procedure on the PUCCH SCell at slot ($m+\frac{T_{HARQ}+T_{activation_time}}{NR\ slot\ length}$) after UE report on PCell.

Time period T3 starts when a MAC message for deactivation of the PUCCH SCell, sent from the test equipment to the UE in a slot # denoted n, is received at the UE antenna connector.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell during activation and deactivation of SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The test equipment verifies the deactivation time by counting the slots from the time when the SCell deactivation command is sent until CSI reporting for SCell is discontinued.

Table A.7.5.3.9.1-1: PUCCH SCell Activation and deactivation test configurations in FR2 inter-band

Config	Description
1	NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode

Table A.7.5.3.9.1-2: General test parameters for PUCCH SCell activation and deactivation in FR2 inter-band

Parameter	Unit	Value	Comment
RF Channel Number		1, 2	Two NR radio channels are used for this test. RF channel number 1 is in band 1 and RF channel number 2 is in band 2, where bands 1 and 2 are inter-band CA operating bands in FR2 as specified in Table 5.2A.2-1 in TS38.101-2.
Active PCell		Cell1	PCell on NR RF channel number 1.
Configured PUCCH SCell		Cell2	Configured PUCCH SCell on NR RF channel number 2.
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
CQI/PMI periodicity and offset configuration index		0	CQI reporting for SCell every second subframe
Cell-individual offset for cells on NR channel number	dB	0	Individual offset for cells on primary component carrier.
TimeAlignmentTimer for sTAG	ms	5120	Set for UE has not valid TA at start of T2 based on T1 = 7s.
SCell measurement cycle (measCycleSCell)	ms	160	
Cell2 timing offset to Cell1	µs	≤ 8	A random value from 0µs to 8µs
Filter coefficient		0	L3 filtering is not used
T_{HARQ}	ms	k_1×NR slot length	k_1 is a number of slots and is indicated by the PDSCH-to-HARQ-timing-indicator field in the DCI format, if present, or provided by *dl-DataToUL-ACK*, the value of k_1 should be the minimum value defined in TS 38.213 [3] depends on UE's capability
$T_{CSI_Reporting}$	ms	2	the delay uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2]
T1	s	7	During this time the PUCCH SCell shall be configured and detected.
T2	s	2	During this time the UE shall activate the PUCCH SCell.
T3	s	1	During this time the UE shall deactivate the PUCCH SCell.

Table A.7.5.3.9.1-3: NR Cell specific test parameters for PUCCH SCell activation and deactivation in FR2 inter-band

Parameter[Note 5]	Unit	Cell 1			Cell 2		
		T1	T2	T3	T1	T2	T3
SSB ARFCN		freq1			freq2		
Duplex mode		TDD					
TDD configuration		TDDConf.3.1					
Downlink initial BWP Configuration		DLBWP.0.1					
Downlink dedicated BWP Configuration		DLBWP.1.1					
Uplink initial BWP configuration		ULBWP.0.1					
Uplink dedicated BWP configuration		ULBWP.1.1					
TRS configuration		TRS.2.1 TDD					
TCI state		TCI.State.0					
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66			100: $N_{RB,c}$ = 66		
PDSCH Reference measurement channel		SR.3.1 TDD			-		
RMSI CORESET Parameters		CR.3.1 TDD			-		
Dedicated CORESET Parameters		CCR.3.1 TDD			-		
CSI-RS configuration		NA			NA	CSI-RS.3.1 TDD Note 2	
CSI reporting periodicity Note 3		NA			NA	5	
OCNG Patterns		OP.1					
SSB Configuration		SSB.1 FR2					
SMTC Configuration		SMTC.1					
EPRE ratio of PSS to SSS	dB	0					
EPRE ratio of PBCH_DMRS to SSS							
EPRE ratio of PBCH to PBCH_DMRS							
EPRE ratio of PDCCH_DMRS to SSS							
EPRE ratio of PDCCH to PDCCH_DMRS							
EPRE ratio of PDSCH_DMRS to SSS							
EPRE ratio of PDSCH to PDSCH_DMRS							
EPRE ratio of OCNG DMRS to SSS[Note 1]							
EPRE ratio of OCNG to OCNG DMRS [Note 1]							
Propagation conditions		AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: CSI-RS for CSI measurement is (re)configured in the next DL slot after slot m+$T_{L1\text{-}RSRP}$ during T2.
Note 3: L1-RSRP measurement and reporting are configured to the the UE prior to the start of time period T1.

Table A.7.5.3.9.1-4: OTA related test parameters for PUCCH SCell activation and deactivation in FR2 inter-band

Parameter[Note 6]	Unit	Cell 1			Cell 2		
		T1	T2	T3	T1	T2	T3
AoA setup		Setup 3 as specified in clause A.3.15					
		AoA1			AoA2		
Assumption for UE beams [Note 7]		Rough			Rough		
N_{oc} [Note1]	dBm/15kHz[Note4]	-92.1			-92.1		
N_{oc} [Note1]	dBm/SCS[Note3]	-83.1			-83.1		
$\hat{E}_s / N_{oc}$	dB	0			-infinite	0	
SS-RSRP[Note2]	dBm/SCS [Note4]	-83.1			-infinite	-83.1	
$\hat{E}_s / I_{ot}$	dB	0			-infinite	0	
Io[Note2]	dBm/ 95.04 MHz [Note4]	-51.1			-54.1	-51.1	

Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5:	As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6:	All parameters apply for configuration 1
Note 7:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.

A.7.5.3.9.2 Test Requirements

During T2, the UE shall start sending valid L1-RSRP report for the SCell in the configured slots for CSI reporting after slot (m+$T_{L1\text{-}RSRP}$), where $T_{L1\text{-}RSRP}$ is no larger than 3ms + $T_{FirstSSB_MAX}$ + 15*T_{SMTC_MAX} + 8*T_{rs} + $T_{L1\text{-}RSRP,\ measure}$ + $T_{L1\text{-}RSRP,\ report}$ as defined in clause 8.3.12. For this test case, $T_{FirstSSB_MAX}$=T_{SMTC_MAX}=T_{rs}=20ms; $T_{L1\text{-}RSRP,\ measure}$=480ms and $T_{L1\text{-}RSRP,\ report}$=5ms, which allows $T_{L1\text{-}RSRP}$ =1000ms.

During T2, the UE shall start sending CSI reports for the SCell with non-zero CQI index in the configured slots for CSI reporting no later than slot m + $\frac{T_{HARQ}+T_{delay_PUCCH_SCell}}{NR\ slot\ length}$, where

- T_{HARQ} is defined in Table A.7.5.3.3.1-2
- $T_{delay_PUCCH_SCell}$ = $T_{activation_time}$ + max (($T_{First_available_CSI}$ + $T_{CSI_processing}$), (T1+T2+T3), T_{meas}) + $T_{CSI_reporting_after}$
- $T_{activation_time}$ = 3ms + $T_{FirstSSB_MAX}$ + 15*T_{SMTC_MAX} + 8*T_{rs} + $T_{L1\text{-}RSRP,\ measure}$ + $T_{L1\text{-}RSRP,\ report}$ + max {(T_{HARQ} + $T_{uncertainty_MAC}$ + 5ms + $T_{FineTiming}$), ($T_{uncertainty_RRC}$ + T_{RRC_delay})}, which allows 1030ms
- T_{meas} = 5* T_{rs} = 100ms
- NR slot length is 0.125ms for this test case.

During T2, the interruption of PCell during SCell activation shall not happen outside the slot $m + 1 + \frac{T_{HARQ}}{\text{NR slot length}}$ to $m + 1 + \frac{T_{HARQ}+3ms+T_X}{\text{NR slot length}}$, where T_X =20ms.

During T3, the UE shall stop sending CSI reports for SCell no later than slot n + $\frac{T_{HARQ}+3ms}{NR\ slot\ length}$, as defined in clause 8.3.14.

During T3, the starting point of interruption of PCell during SCell deactivation shall not happen outside the slot n + 1 + $\frac{T_{HARQ}}{NR\ slot\ length}$ to n + 1 + $\frac{T_{HARQ}+3ms}{NR\ slot\ length}$ as defined in clause 8.3.14.

A.7.5.3.10 SCell Activation and deactivation of FR2 known PUCCH SCell and one FR2 unknown SCell with FR2 PCell

A.7.5.3.10.1 Test Purpose and Environment

The purpose of this test is to verify that when a PUCCH SCell and DL SCell are activated using the same MAC CE command, the PUCCH SCell, and DL SCell activation and deactivation delays are within the requirements stated in clause 8.3.13 and 8.3.15. When UE receive the MAC CE activation command, PUCCH SCell in FR2 is known to UE and DL SCell in FR2 is unknown to the UE.

The supported test configurations are provided in table A.7.5.3.10.1-1 below. The general test parameters are given in Tables A.7.5.3.10.1-2 and cell-specific test parameters are given in A.7.5.3.10.1-3. OTA related test parameters are given in A.7.5.3.10.1-4.

The test consists of two sub tests, one with valid timing advance (TA), and other with invalid TA. The test consists of six successive time periods, with duration of T1, T2, and T3 respectively. There are two NR carriers, and PCC has two cell and SCC has one cells. All cells have constant signal levels throughout the test. Before the test starts the UE is connected to Cell 1 but is not aware of Cell 2 (PUCCH SCell) and Cell 3 (DL SCell). Cell1 and Cell 3 are configured on primary timing advance group (pTAG). Cell2 is on different band than Cell1 and Cell3. For valid TA case, Cell1, Cell2 and Cell 3 are on same TAG. For invalid TA case Cell 2 is on different TAG than Cell1 and Cell3. At the start of the test, the UE is monitoring PCC and not SCC.

At the beginning of T1, the UE receives an RRC message by which the PUCCH SCell (Cell 2) and DL SCell (Cell 3) becomes configured on radio channel 2 and 1 respectively. In T1, the UE starts measuring PUCCH SCell 1 and DL SCell is not detectable. During the duration of T1, the time alignment timer is running on and pTAG, and the TA is maintained on PCell. At the end of T1, the test equipment sends a MAC CE message for activation of the PUCCH SCell and DL SCell simultaneously.

The point in time at which the MAC message is received at the UE antenna connector, in slot # denoted n, defines the start of time period T2. The UE shall be able to report valid CSI for the activated PUCCH SCell at latest in slot $n1+\frac{T_{HARQ}+T_{delay_multiple_SCells_PUCCH_SCell}}{NR\ slot\ length}$, and report valid CSI for the activated DL SCell at latest in slot $n1+\frac{T_{HARQ}+T_{delay_multiple_SCells_other_SCell}}{NR\ slot\ length}$, as defined in clause 8.3.13. In this test case, both valid TA and invalid TA cases shall be tested.

Test for case when UE has valid TA (i.e., the *TimeAlignmentTimer* [2] associated with the TAG containing the PUCCH SCell is running), $T_{delay_multiple_SCells_PUCCH_SCell} = T_{activation_time_multiple_scells} + [X]*T_{target_PL_RS} + T_{CSI_Reporting}$.

Test for case when UE do not have valid TA: $T_{delay_multiple_SCells_PUCCH_SCell} = T_{activation_time_multiple_scells} + \max((T_{First_available_CSI} + T_{CSI_processing}), [X]*T_{target_PL_RS}, (T1+T2+T3)) + T_{CSI_reporting_after}$

$T_{activation_time_multiple_scells}$ is the target SCell activation delay in millisecond in multiple SCell activation scenario as specified in section 8.3.7

In case of valid TA, for Cell2 activation, the UE shall start reporting CSI in PUCCH SCell in slot $n1 + \frac{T_{\mathrm{HARQ}}+3\mathrm{ms}}{\mathrm{NR\ slot\ length}}$ and shall report CQI index 0 (out-of-range) until the PUCCH SCell activation has been completed.

For Cell3 activation, the UE shall start reporting CSI in PCell in slot $n1 + \frac{T_{\mathrm{HARQ}}+3\mathrm{ms}}{\mathrm{NR\ slot\ length}}$ and shall report CQI index 0 (out-of-range) until the DL SCell activation has been completed.

Any PCell interruption due to activation of PUCCH SCell or DL SCell shall occur in the slot $n1 + 1 + \frac{T_{\mathrm{HARQ}}}{\mathrm{NR\ slot\ length}}$ to $n1 + 1 + \frac{T_{\mathrm{HARQ}}+3\mathrm{ms}+T_{\mathrm{X}}}{\mathrm{NR\ slot\ length}} + N_{\mathrm{interruption}}$, as defined in clause 8.3.13, where $N_{\mathrm{interruption}}$ is the interruption length given in clause 8.2.2.2.7.

Time period T3 starts when a MAC message for deactivation of PUCCH SCell and DL SCell, sent from the test equipment to the UE in a slot # denoted n2, is received at the UE antenna connector. The UE shall carry out deactivation of the SCell in a slot $\mathrm{n2} + \frac{\mathrm{T_{HARQ}}+3ms}{NR\ slot\ length}$, as defined in clause 8.3.15, and the starting point of any PCell interruption due to the deactivation shall occur in the slot $\mathrm{n2} + 1 + \frac{\mathrm{T_{HARQ}}}{NR\ slot\ length}$ to $\mathrm{n2} + 1 + \frac{\mathrm{T_{HARQ}}+3\mathrm{ms}}{NR\ slot\ length}$, as defined in clause 8.3.15.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell during activation and deactivation of PUCCH SCell and DL SCell, respectively.

The test equipment verifies the PUCCH SCell activation time by counting the slots from the time when the PUCCH SCell activation command is sent until a CSI report with other than CQI index 0 is received. The test equipment verifies the DL SCell activation time by counting the slots from the time when the DL SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The test equipment verifies the PUCCH SCell deactivation time by counting the slots from the time when the SCell deactivation command is sent until CQI reporting for PUCCH SCell is discontinued. The test equipment verifies the DL SCell deactivation time by counting the slots from the time when the SCell deactivation command is sent until CQI reporting for DL SCell is discontinued.

Table A.7.5.3.10.1-1: Supported test configurations for FR2 SCell activation in FR2 inter-band

Configuration	Description
1	NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode for PCell NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode for PUCCH SCell and DL SCell

Table A.7.5.3.10.1-2: General test parameters for FR2 SCell activation in FR2 inter-band

Parameter	Unit	Value	Comment
RF Channel Number		1,2	Two NR radio channels are used for this test. RF channel number 1 is in band 1 and RF channel number 2 is in band 2, where bands 1 and 2 are inter-band CA operating bands in FR2 as specified in Table 5.2A.2-1 in TS38.101-2.
Active PCell		Cell 1	Primary cell on NR RF channel number 1.
Configured deactivated PUCCH SCell		Cell 2	Configured deactivated secondary cell on NR RF channel number 2.
Configured deactivated SCell		Cell 3	Configured deactivated secondary cell on NR RF channel number 2.
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
CQI/PMI periodicity and offset configuration index		0	CQI reporting for SCell every second subframe
Cell-individual offset for cells on NR channel number	dB	0	Individual offset for cells on primary component carrier.
SCell measurement cycle (measCycleSCell)	ms	160	
Cell2 and Cell3 timing offset to cell1	µs	≤8	A random value from 0µs to 8µs
T1	s	6	During this time the PUCCH SCell shall be known and the DL SCell configured and detected.
T2	s	2	During this time the UE shall activate the SCell.
T3	s	1	During this time the UE shall deactivate the SCell.
T4	s	6	During this time the PUCCH SCell shall be known and the DL SCell configured and detected.
T5	s	2	During this time the UE shall activate the PUCCH SCell and DL SCell.
T6	s	1	During this time the UE shall deactivate the PUCCH SCell and DL SCell.

T_{HARQ}	ms	k_1×NR slot length	k_1 is a number of slots and is indicated by the PDSCH-to-HARQ-timing-indicator field in the DCI format, if present, or provided by *dl-DataToUL-ACK*, the value of k should be the minimum value defined in TS 38.213 [3] depends on UE's capability
$T_{CSI_Reporting}$	ms	2	the delay uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2]

Table A.7.5.3.10.1-3: Cell specific test parameters for FR2 SCell activation in FR2 inter-band

Parameter Note 5	Unit	T1			T2			T3		
		Cell 1	Cell 2	Cell3	Cell 1	Cell 2	Cell3	Cell 1	Cell 2	Cell3
SSB ARFCN		freq1	freq2		freq1	freq2		freq1	freq2	
Duplex mode		TDD			TDD			TDD		
TDD configuration		TDDConf.3.1			TDDConf.3.1			TDDConf.3.1		
Downlink initial BWP Configuration		DLBWP.0.1			DLBWP.0.1			DLBWP.0.1		
Downlink dedicated BWP Configuration		DLBWP.1.1			DLBWP.1.1			DLBWP.1.1		
Uplink initial BWP configuration		ULBWP.0.1			ULBWP.0.1			ULBWP.0.1		
Uplink dedicated BWP configuration		ULBWP.1.1			ULBWP.1.1			ULBWP.1.1		
TRS configuration		TRS.2.1 TDD			TRS.2.1 TDD			TRS.2.1 TDD		
TCI state		TCI.State.0			TCI.State.0			TCI.State.0		
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66			100: $N_{RB,c}$ = 66			100: $N_{RB,c}$ = 66		
PDSCH Reference measurement channel		SR.3.1 TDD	-		SR.3.1 TDD	-		SR.3.1 TDD	-	
RMSI CORESET Parameters		CR.3.1 TDD	-		CR.3.1 TDD	-		CR.3.1 TDD	-	
Dedicated CORESET Parameters		CCR.3.1 TDD	-		CCR.3.1 TDD	-		CCR.3.1 TDD	-	
CSI-RS configuration		CSI-RS.3.1 TDD	NA		CSI-RS.3.1 TDD	CSI-RS.3.1 TDD Note 2		CSI-RS.3.1 TDD	CSI-RS.3.1 TDD	
CSI reporting periodicity Note 3		NA	5		NA	5		NA	5	
OCNG Patterns		OP.1								
SSB Configuration		SSB.1 FR2								
SMTC Configuration		SMTC.1								
EPRE ratio of PSS to SSS	dB	0								
EPRE ratio of PBCH_DMRS to SSS										
EPRE ratio of PBCH to PBCH_DMRS										
EPRE ratio of PDCCH_DMRS to SSS										
EPRE ratio of PDCCH to PDCCH_DMRS										
EPRE ratio of PDSCH_DMRS to SSS										
EPRE ratio of PDSCH to PDSCH_DMRS										
EPRE ratio of OCNG DMRS to SSS Note 1										
EPRE ratio of OCNG to OCNG DMRS Note 1										
Propagation conditions		AWGN								

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: CSI-RS for CSI measurement is (re)configured in the next DL slot after slot m+$T_{L1\text{-}RSRP}$ during T2.
Note 3: L1-RSRP measurement and reporting are configured to the the UE prior to the start of time period T1.

Table A.7.5.3.10.1-4: OTA related test parameters for FR2 SCell activation in FR2 inter-band

Parameter Note 6	Unit	Cell 1	Cell3		Cell 2		
		T1	T2	T3	T1	T2	T3
AoA setup		Setup 3 as specified in clause A.3.15					
		AoA1			AoA2		
Assumption for UE beams Note 7		Rough			Rough		
N_{oc} Note1	dBm/15kHz Note4	-92.1			-92.1		
N_{oc} Note1	dBm/SCS Note3	-83.1			-83.1		
$\hat{E}_s / N_{oc}$	dB	0			-∞		
SS-RSRP Note2	dBm/SCS Note4	-83.1			-83.1		
$\hat{E}_s / I_{ot}$	dB	0			0		
Io Note2	dBm/95.04 MHz Note4	-51.1			-51.1		

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6: All parameters apply for configuration 1
Note 7: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.

A.7.5.3.10.2 Test Requirements

When UE receive SCell activation command at slot n1, during T2 the UE shall start sending CSI reports for SCell2 with non-zero CQI index in the configured slots for CSI reporting no later than slot n1 + $\frac{T_{HARQ}+T_{delay_multiple_SCells_PUCCH_SCell}}{NR\ slot\ length}$, where

- T_{HARQ} is defined in Table A.5.5.3.x6.1-2

- $T_{delay_multiple_SCells_PUCCH_SCell}$ is defined in section 8.13.13.1. In this test case, both valid TA and invalid TA cases shall be tested.

  - Test for case when UE has valid TA: the *TimeAlignmentTimer* [2] associated with the TAG containing the PUCCH SCell is running, and $T_{delay_multiple_SCells_PUCCH_SCell} = T_{activation_time_multiple_scells} + [X]*T_{target_PL_RS} + T_{CSI_Reporting}$.

  - Test for case when UE do not have valid TA: $T_{delay_multiple_SCells_PUCCH_SCell} = T_{activation_time_multiple_scells} + \max((T_{First_available_CSI} + T_{CSI_processing}), [X]*T_{target_PL_RS}, (T1+T2+T3)) + T_{CSI_reporting_after}$.

  - $T_{activation_time_multiple_scells}$ is the target SCell activation delay in millisecond in multiple SCell activation scenario as specified in section 8.3.7.

- $T_{CSI_Reporting}$ = 10ms

- NR slot length is 0.125ms.

During T2 the UE shall start sending CSI reports for SCell3 with non-zero CQI index in the configured slots for CSI reporting no later than slot n1 + $\frac{T_{HARQ}+T_{delay_multiple_SCells_other_SCell}}{NR\ slot\ length}$where

- T_{HARQ} is defined in Table A.5.5.3.x6.1-2

- $T_{delay_multiple_SCells_other_SCell}$ = $T_{activation_time_multiple_scells}$ +$T_{CSI_Reporting}$.

  - $T_{activation_time_multiple_scells}$ is the target SCell activation delay in millisecond in multiple SCell activation scenario as specified in section 8.3.7

- $T_{CSI_Reporting}$ = 10ms

- NR slot length is 0.125ms.

Any PCell interruption due to activation of PUCCH SCell or DL SCell shall occur in the slot $n1 + 1 + \frac{T_{\mathrm{HARQ}}}{\mathrm{NR\ slot\ length}}$ to $n1 + 1 + \frac{T_{\mathrm{HARQ}}+3\mathrm{ms}+T_{\mathrm{X}}}{\mathrm{NR\ slot\ length}} + N_{\mathrm{interruption}}$, as defined in clause 8.3.13, where $N_{\mathrm{interruption}}$ is the interruption length given in clause 8.2.2.2.7.

During T3, when UE receives deactivation MAC CE at n2 slot, the UE shall stop sending CSI reports for both PUCCH SCell and DL SCell no later than slot $n2 + \frac{\mathrm{T_{HARQ}+3ms}}{NR\ slot\ length}$, as defined in clause 8.3. The starting point of any PCell interruption due to the deactivation shall occur in the slot $n2 + 1 + \frac{\mathrm{T_{HARQ}}}{NR\ slot\ length}$ to $n2 + 1 + \frac{\mathrm{T_{HARQ}+3ms}}{NR\ slot\ length}$, as defined in clause 8.3.15.

All of the above test requirements shall be fulfilled in order for the observed SCell activation delay to be counted as correct. The rate of correct observed SCell activation delay and SCell deactivation delay during repeated tests shall be at least 90%.

NOTE: During T2 if there are no uplink resources for reporting the valid CSI in a slot $n1 + \frac{T_{HARQ}+T_{delay_multiple_SCells_PUCCH_SCell}}{NR\ slot\ length}$, as defined in clause 8.3.13 then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

A.7.5.3.11 PUCCH SCell activation and deactivation delay requirements of FR2 unknown cell with FR2 PCell

A.7.5.3.11.1 PUCCH SCell activation with non-PUCCH SCell in a secondary PUCCH Group

A.7.5.3.11.1.1 Test Purpose and Environment

The purpose of this test case is the same as for the test defined in clause A.7.5.3.11 except the PUCCH SCell in FR2 is unknown and another to-be-activated FR2 non-PUCCH SCell in parallel with the PUCCH SCell belongs to the secondary PUCCH group.

The supported test configurations and the general test parameters are defined in Table A.7.5.3.11.1.1-1 and Table A.7.5.3.11.1.1-2, respectively. And cell specific test parameters are described in Tables A.7.5.3.11.1.1-3. OTA related test parameters are defined in Table A.7.5.3.11.1.1-4. In all test cases, three cells are used. Cell 1 is the FR2 PCell, and Cell 2 and Cell 3 are SCells in a different band from Cell 1. Cell 2 is PUCCH SCell and Cell 3 is non-PUCCH SCell belonging to the secondary PUCCH group.

In the test configuration 1, the UE is configured with a single Timingi Advance Group (TAG) for all cells, whereas UE is configured with a primary TAG (pTAG) for Cell 1 and a secondary TAG (sTAG) for Cell 2 and Cell 3 in the test configuration 2. The test configuration 1 and 2 are to verify the UE performance for the case where the UE has a

valid TA for the PUCCH SCell and the case where the UE does not have a valid TA for the PUCCH SCell, respectively.

At the beginning of T1 the UE receives an RRC message by which the PUCCH SCell (Cell) and the non-PUCCH SCell (Cell 3) become configured on NR. During T1 the SCells are powered off and UE is not aware of the SCells.

A MAC message for activation of SCells is sent by the test equipment T1 after the RRC message, in a slot # denoted m. The point in time at which the MAC message for activation of SCells is received at the UE antenna connector defines the start of time period T2. Immediately at the beginning of T2 the transmission power of Cell 2 is increased to same level as for cell 2 At the time of T2, the UE has a valid TA in the test configuration 1 while the UE does not have a valid TA for the SCell in sTAG in the test configuration 2. During the test for the test configuration 1, the UE needs to be provided with a new Timing Advance Command MAC control element at least once during each time alignment timer period.

During T2, the test equipment monitors the L1-RSRP measurement result for the PUCCH SCell reported on the PCell. The time when test equipment receives a valid L1-RSRP report is denoted as slot $m+T_{L1\text{-}RSRP}$. In the next DL slot after slot $m+T_{L1\text{-}RSRP}$, the test equipment sends a MAC message for the activation of the TCI state of the RMC CORESET of the SCells and PUCCH-SpatialRelation of the PUCCH SCell. In the same slot, the test equipment also sends an RRC message to configure the CSI-RS resources for the SCells.

During the test for the test configuration 1, the UE shall start reporting CSI of the PUCCH SCell (Cell 2) and the non-PUCCH SCell (Cell 3) with non-zero CQI index via PUCCH on the SCell no later than slot m + (T_{HARQ} + $T_{delay_multiple_SCells_PUCCH_SCell}$)/NR slot length and slot m + (T_{HARQ} + $T_{delay_multiple_SCells_other_SCell}$)/NR slot length, respectively. Here, $T_{delay_multiple_SCells_PUCCH_SCell}$ and $T_{delay_multiple_SCells_other_SCell}$ are the PUCCH SCell activation delay and other SCell activation delay defined in 8.3.13 for a valid TA scenario.

During the test for the test configuration 2, T_{HARQ} + $T_{activation_time}$ after slot m, the UE shall be able to monitor PDCCH on the PUCCH SCell that triggers PDCCH order-based contention-free PRACH. The test equipment receives the PRACH and sends random access response with Timing Advance Command MAC Control Elements for sTAG, with Timing Advance Command value estimated from the PRACH. The UE shall start reporting CSI of the PUCCH SCell (Cell 2) and the non-PUCCH SCell (Cell 3) with non-zero CQI index via PUCCH on the SCell no later than slot m + (T_{HARQ} + $T_{delay_multiple_SCells_PUCCH_SCell}$)/NR slot length and slot m + (T_{HARQ} + $T_{delay_multiple_SCells_other_SCell}$)/NR slot length, respectively. Here, $T_{activation_time}$ is the SCell activation delay defined in 8.3.2 for FR2 unknown SCell with periodic CSI-RS used for CSI reporting, and $T_{delay_multiple_SCells_PUCCH_SCell}$ and $T_{delay_multiple_SCells_other_SCell}$ are the PUCCH SCell activation delay and other SCell activation delay defined in 8.3.13 for an invalid TA scenario.

Time period T3 starts when a MAC message for deactivation of the SCells, sent from the test equipment to the UE in a slot # denoted n, is received at the UE antenna connector.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell during the activation of the SCells.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The test equipment verifies the deactivation time by counting the slots from the time when the SCell deactivation command is sent until CSI reporting on the PUCCH SCell is discontinued.

Table A.7.5.3.11.1.1-1: Supported test configurations for FR2 SCell activation case

Configuration	Description
1	PCell: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode Target SCells: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
2	PCell: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode Target SCells: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode

Note:	The UE is required to pass both of the supported test configurations. The UE will be configured with a single Timing Advance Group (TAG) in the test configuration 1 whearas two TAGs are used in the test configuration 2.

Table A.7.5.3.11.1.1-2: General test parameters for unknown FR2 PUCCH SCell activation case

Parameter	Unit	Value	Comment
RF Channel Number		1,2,3	Three NR radio channel (1, 2, 3) are used for this test
Active PCell		Cell 1	Primary cell on NR RF channel number 1.
Configured deactivated PUCCH SCell		Cell 2	Configured deactivated secondary cell on NR RF channel number 2. The cell is in a different FR2 band from Cell 1.
Configured deactivated non-PUCCH SCell		Cell 3	Configured deactivated secondary cell on NR RF channel number 3. The cell is intra-band contiguous to Cell 2.
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
Cell-individual offset for cells on NR channel number	dB	0	Individual offset for cells on primary component carrier.
SCell measurement cycle (measCycleSCell)	ms	160	
Cell2 timing offset to cell1	μs	≤25	A random value from 0μs to 25μs
Cell3 timing offset to cell1	μs	≤25	A random value from 0μs to 25μs
Cell3 timing offset to cell2	μs	0	
T1	s	7	During this time the PCell (Cell 1) shall be known and the SCells (Cell 2 and Cell 3) configured and detected.
T2	s	2	During this time the UE shall activate the SCells.
T3	s	1	During this time the UE shall deactivate the SCells.
T_{HARQ}	ms	Config 1: 2 Config 2: 3 Config 3: 2.5	k_1×NR slot length k_1 is a number of slots and is indicated by the PDSCH-to-HARQ-timing-indicator field in the DCI format, if present, or provided by *dl-DataToUL-ACK*, the value of k should be the minimum value defined in TS 38.213 [3] that will meet the timing constraints of this test case.
$T_{CSI_Reporting}$	ms	15	the delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting (clause 5.2.2.5 in TS 38.214) and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2] and TS 38.213 [3].

Table A.7.5.3.11.1.1-3: Cell specific test parameters for FR2 PUCCH SCell activation case

Parameter		Unit	Cell 1			Cell 2			Cell 3		
			T1	T2	T3	T1	T2	T3	T1	T2	T3
SSB ARFCN			freq1			freq2			freq3		
Duplex mode	Config 1,2		TDD								

TDD configuration	Config 1,2		TDDConf.3.1				
Downlink initial BWP Configuration	Config 1,2		DLBWP.0.1				
Downlink dedicated BWP Configuration	Config 1,2		DLBWP.1.1				
Uplink initial BWP configuration	Config 1,2		ULBWP.0.1				
Uplink dedicated BWP configuration	Config 1,2		ULBWP.1.1				
TRS configuration	Config 1,2		TRS.2.1 TDD				
TCI state	Config 1,2		TCI.State.0				
PUCCH Spatial Relation	Config 1,2		PUCCH.SRI.0	PUCCH.SRI.0		N/A	
$BW_{channel}$	Config 1,2	MHz	100: $N_{RB,c}$ = 66				
PDSCH Reference measurement channel	Config 1,2		SR.3.1 TDD	SR.3.1 TDD		-	
RMSI CORESET Reference Channel	Config 1,2		CR.3.1 TDD	-		-	
Dedicated CORESET Parameters	Config 1,2		CCR.3.1 TDD	CCR.3.1 TDD		-	
TimeAlignmentTimer for pTAG	Config 1,2		ms500	N/A		N/A	
TimeAlignmentTimer for sTAG	Config 1		N/A	N/A		N/A	
	Config 2		N/A	ms500		N/A	
CSI-RS configuration for CSI reporting	Config 1,2		-	N/A	CSI-RS.3.1 TDD Note 6	N/A	CSI-RS.3.1 TDD Note 6
SSB configuration	Config 1,2		SSB.3 FR2	N/A	SSB.3 FR2	N/A	SSB.3 FR2
CSI reporting periodicity	Config 1,2	ms	5	5		N/A	
reportConfigType for CSI reporting	Config 1,2		-	Periodic		N/A	
reportConfigType for L1-RSRP	Config 1,2		periodic	-		N/A	
reportQuantity for CSI reporting	Config 1,2		-	cri-RI-PMI-CQI		-	
reportQuantity for L1-RSRP	Config 1,2		ssb-Index-RSRP	-		N/A	
CSI reporting periodicity	Config 1,2		-	40		40	
L1-RSRP reporting periodicity Note 7	Config 1,2		40	-		N/A	
CSI reporting offset	Config 1,2		-	4		4	
L1-RSRP reporting offset	Config 1,2		4	-		N/A	
OCNG Patterns			OP.1				
SMTC configuration			SMTC.1				
EPRE ratio of PSS to SSS		dB	0				
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
Propagation condition		-	AWGN				

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: Void
Note 4: Void
Note 5: Void

Note 6: CSI-RS for CSI measurement is (re)configured in the next DL slot after slot m+$T_{L1\text{-}RSRP}$ during T2.
Note 7: L1-RSRP measurement and reporting are configured to the the UE prior to the start of time period T1.

Table A.7.5.3.11.1.1-4: OTA related test parameters for FR2 PUCCH SCell activation

Parameter Note 6	Unit	Cell 2			Cell 3		
		T1	T2	T3	T1	T2	T3
Angle of arrival configuration		Setup 1 according to A.3.15.1					
Assumption for UE beams Note 7		Rough			Rough		
N_{oc} Note1	dBm/15kHz Note4	-112			-112		
N_{oc} Note1	dBm/SCS Note3	-102.97			-102.97		
$\hat{E}_s / N_{oc}$	dB	-∞	14	14	-∞	14	14
SS-RSRP Note2	dBm/SCS Note4	-∞	-88.97	-88.97	-∞	-88.97	-88.97
$\hat{E}_s / I_{ot}$	dB	-∞	14	14	-∞	14	14
Io Note2	dBm/95.04 MHz Note4	-73.98	-59.81	-59.81	-73.98	-59.81	-59.81

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6: All parameters apply for configuration 1 and 2
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.5.3.11.1.2 Test Requirements

During T2 the UE shall start sending a valid L1-RSRP report of the SCell to the PCell in the configured slots for CSI reporting after slot (m+$T_{L1\text{-}RSRP}$), where $T_{L1\text{-}RSRP}$ is no larger than 3ms + $T_{FirstSSB_MAX}$ + 15*T_{SMTC_MAX} + 8*T_{rs} + $T_{L1\text{-}RSRP,\ measure}$ + $T_{L1\text{-}RSRP,\ report}$ as defined in clause 8.3.2.

During T2, if the test is based on the test configuration 1, the UE shall start sending CSI reports of the PUCCH SCell (Cell 2) and the non-PUCCH SCell (Cell 3) with non-zero CQI index via PUCCH on the SCell no later than slot m + (T_{HARQ} + $T_{delay_multiple_SCells_PUCCH_SCell}$)/NR slot length and slot m + (T_{HARQ} + $T_{delay_multiple_SCells_other_SCell}$)/NR slot length, respectively. Here, $T_{delay_multiple_SCells_PUCCH_SCell}$ and $T_{delay_multiple_SCells_other_SCell}$ are the PUCCH SCell activation delay and other SCell activation delay defined in 8.3.13 for a valid TA scenario.

During T2, if the test is based on the test configuration 2, the UE shall start sending CSI reports of the PUCCH SCell (Cell 2) and the non-PUCCH SCell (Cell 3) with non-zero CQI index via PUCCH on the SCell (Cell 2) no later than slot m + (T_{HARQ} + $T_{delay_multiple_SCells_PUCCH_SCell}$)/NR slot length and slot m + (T_{HARQ} + $T_{delay_multiple_SCells_other_SCell}$)/NR slot length, respectively. Here, $T_{delay_multiple_SCells_PUCCH_SCell}$ and $T_{delay_multiple_SCells_other_SCell}$ are the PUCCH SCell activation delay and other SCell activation delay defined in 8.3.13 for an invalid TA scenario.

During T3 the UE shall stop sending CSI reports on the PUCCH SCell no later than slot n + $\frac{T_{HARQ}+3ms}{NR\ slot\ length}$, as defined in clause 8.3.15.

During T2 interruption of PCell during the SCell activation shall not happen outside the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $m + 1 + \frac{T_{\text{HARQ}} + 3\text{ms} + T_X}{\text{NR slot length}}$, as defined in clause 8.3, where T_X =20ms. If the UE is not capable of parallelTxPRACH-SRS-PUCCH-PUSCH additional interruption can be allowed as defined in Clause 8.2.2.2.18.

During T3 the starting point of interruption of PCell during SCell deactivation shall not happen outside the slot $n + 1 + \frac{T_{\text{HARQ}}}{NR\ slot\ length}$ to $n + 1 + \frac{T_{\text{HARQ}} + 3\text{ms}}{NR\ slot\ length}$, as defined in clause 8.3.15.

The interruption of PCell due to activation of SCells shall not be more than the values specified for SA in Clause 8.2.2.2.18.

A.7.5.3.11.2 PUCCH SCell activation with non-PUCCH SCell in a primary PUCCH Group

A.7.5.3.11.2.1 Test Purpose and Environment

The purpose of this test case is the same as for the test defined in clause A.7.5.3.11 except the PUCCH SCell in FR2 is unknown and another to-be-activated FR2 non-PUCCH SCell in parallel with the PUCCH SCell belongs to the primary PUCCH group.

The supported test configurations and the general test parameters are defined in Table A.7.5.3.11.2.1-1 and Table A.7.5.3.11.2.1-2, respectively. And cell specific test parameters are described in Tables A.7.5.3.11.2.1-3. OTA related test parameters are defined in Table A.7.5.3.11.2.1-4. In all test cases, three cells are used. Cell 1 and Cell 3 are FR2 PCell and FR2 non-PUCCH SCell in the same band, respectively, and Cell 2 is PUCCH SCells in a different band from Cell 1 and Cell 3. Cell 3 belongs to the primary PUCCH group.

In the test configuration 1, the UE is configured with a single Timingi Advance Group (TAG) for all cells, whereas UE is configured with a primary TAG (pTAG) for Cell 1 and a secondary TAG (sTAG) for Cell 2 and Cell 3 in the test configuration 2. The test configuration 1 and 2 are to verify the UE performance for the case where the UE has a valid TA for the PUCCH SCell and the case where the UE does not have a valid TA for the PUCCH SCell, respectively.

At the beginning of T1 the UE receives an RRC message by which the PUCCH SCell (Cell) and the non-PUCCH SCell (Cell 3) become configured on NR. During T1 the SCells are powered off and UE is not aware of the SCells.

A MAC message for activation of SCells is sent by the test equipment T1 after the RRC message, in a slot # denoted m. The point in time at which the MAC message for activation of SCells is received at the UE antenna connector defines the start of time period T2. Immediately at the beginning of T2 the transmission power of Cell 2 is increased to same level as for cell 2 At the time of T2, the UE has a valid TA in the test configuration 1 while the UE does not have a valid TA for the SCell in sTAG in the test configuration 2. During the test for the test configuration 1, the UE needs to be provided with a new Timing Advance Command MAC control element at least once during each time alignment timer period.

During T2, the test equipment monitors the L1-RSRP measurement result for the PUCCH SCell reported on the PCell. The time when test equipment receives a valid L1-RSRP report is denoted as slot $m+T_{\text{L1-RSRP}}$. In the next DL slot after slot $m+T_{\text{L1-RSRP}}$, the test equipment sends a MAC message for the activation of the TCI state of the RMC CORESET of the SCells and PUCCH-SpatialRelation of the PUCCH SCell. In the same slot, the test equipment also sends an RRC message to configure the CSI-RS resources for the SCells.

During the test for the test configuration 1, the UE shall start reporting CSI of the PUCCH SCell (Cell 2) and the non-PUCCH SCell (Cell 3) with non-zero CQI index via PUCCH on the PUCCH SCell (Cell 2) and PCell (Cell 1), respectively, no later than slot m + (T_{HARQ} + $T_{\text{delay_multiple_SCells_PUCCH_SCell}}$)/NR slot length and slot m + (T_{HARQ} + $T_{\text{delay_multiple_SCells_other_SCell}}$)/NR slot length, respectively. Here, $T_{\text{delay_multiple_SCells_PUCCH_SCell}}$ and $T_{\text{delay_multiple_SCells_other_SCell}}$ are the PUCCH SCell activation delay and other SCell activation delay defined in 8.3.13 for a valid TA scenario.

During the test for the test configuration 2, $T_{HARQ} + T_{activation_time}$ after slot m, the UE shall be able to monitor PDCCH on the PUCCH SCell that triggers PDCCH order-based contention-free PRACH. The test equipment receives the PRACH and sends random access response with Timing Advance Command MAC Control Elements for sTAG, with Timing Advance Command value estimated from the PRACH. The UE shall start reporting CSI of the PUCCH SCell (Cell 2) and the non-PUCCH SCell (Cell 3) with non-zero CQI index via PUCCH on the PUCCH SCell (Cell 2) and PCell (Cell 1), respectively, no later than slot m + ($T_{HARQ} + T_{delay_multiple_SCells_PUCCH_SCell}$)/NR slot length and slot m + ($T_{HARQ} + T_{delay_multiple_SCells_other_SCell}$)/NR slot length, respectively. Here, $T_{activation_time}$ is the SCell activation delay defined in 8.3.2 for FR2 unknown SCell with periodic CSI-RS used for CSI reporting, and $T_{delay_multiple_SCells_PUCCH_SCell}$ and $T_{delay_multiple_SCells_other_SCell}$ are the PUCCH SCell activation delay and other SCell activation delay defined in 8.3.13 for an invalid TA scenario.

Time period T3 starts when a MAC message for deactivation of the SCells, sent from the test equipment to the UE in a slot # denoted n, is received at the UE antenna connector.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell during the activation of the SCells.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The test equipment verifies the deactivation time by counting the slots from the time when the SCell deactivation command is sent until CSI reporting on the PUCCH SCell is discontinued.

Table A.7.5.3.11.2.1-1: Supported test configurations for FR2 SCell activation case

Configuration	Description
1	PCell: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode Target SCells: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
2	PCell: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode Target SCells: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
Note: The UE is required to pass both of the supported test configurations. The UE will be configured with a single Timing Advance Group (TAG) in the test configuration 1 whearas two TAGs are used in the test configuration 2.	

Table A.7.5.3.11.2.1-2: General test parameters for unknown FR2 PUCCH SCell activation case

Parameter	Unit	Value	Comment
RF Channel Number		1,2,3	Three NR radio channel (1, 2, 3) are used for this test
Active PCell		Cell 1	Primary cell on NR RF channel number 1.
Configured deactivated PUCCH SCell		Cell 2	Configured deactivated secondary cell on NR RF channel number 2. The cell is in a different FR2 band from Cell 1.
Configured deactivated non-PUCCH SCell		Cell 3	Configured deactivated secondary cell on NR RF channel number 3. The cell is intra-band contiguous to Cell 1.
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
Cell-individual offset for cells on NR channel number	dB	0	Individual offset for cells on primary component carrier.
SCell measurement cycle (measCycleSCell)	ms	160	
Cell2 timing offset to cell1	μs	≤25	A random value from 0μs to 25μs
Cell3 timing offset to cell1	μs	≤25	A random value from 0μs to 25μs
Cell3 timing offset to cell2	μs	0	

T1	s	7	During this time the PCell (Cell 1) shall be known and the SCells (Cell 2 and Cell 3) configured and detected.
T2	s	2	During this time the UE shall activate the SCells.
T3	s	1	During this time the UE shall deactivate the SCells.
T_{HARQ}	ms	Config 1: 2 Config 2: 3 Config 3: 2.5	k_1×NR slot length k_1 is a number of slots and is indicated by the PDSCH-to-HARQ-timing-indicator field in the DCI format, if present, or provided by *dl-DataToUL-ACK*, the value of k should be the minimum value defined in TS 38.213 [3] that will meet the timing constraints of this test case.
$T_{CSI_Reporting}$	ms	15	the delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting (clause 5.2.2.5 in TS 38.214) and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2] and TS 38.213 [3].

Table A.7.5.3.11.2.1-3: Cell specific test parameters for FR2 PUCCH SCell activation case

Parameter		Unit	Cell 1			Cell 2			Cell 3		
			T1	T2	T3	T1	T2	T3	T1	T2	T3
SSB ARFCN			freq1			freq2			freq3		
Duplex mode	Config 1,2		TDD								
TDD configuration	Config 1,2		TDDConf.3.1								
Downlink initial BWP Configuration	Config 1,2		DLBWP.0.1								
Downlink dedicated BWP Configuration	Config 1,2		DLBWP.1.1								
Uplink initial BWP configuration	Config 1,2		ULBWP.0.1								
Uplink dedicated BWP configuration	Config 1,2		ULBWP.1.1								
TRS configuration	Config 1,2		TRS.2.1 TDD								
TCI state	Config 1,2		TCI.State.0								
PUCCH Spatial Relation	Config 1,2		PUCCH.SRI.0			PUCCH.SRI.0			N/A		
$BW_{channel}$	Config 1,2	MHz	100: $N_{RB,c}$ = 66								
PDSCH Reference measurement channel	Config 1,2		SR.3.1 TDD			SR.3.1 TDD			-		
RMSI CORESET Reference Channel	Config 1,2		CR.3.1 TDD			-			-		
Dedicated CORESET Parameters	Config 1,2		CCR.3.1 TDD			CCR.3.1 TDD			-		
TimeAlignmentTimer for pTAG	Config 1,2		ms500			N/A			N/A		
TimeAlignmentTimer for sTAG	Config 1		N/A			N/A			N/A		
	Config 2		N/A			ms500			N/A		
CSI-RS configuration for CSI reporting	Config 1,2		-			N/A	CSI-RS.3.1 TDD Note 6		N/A	CSI-RS.3.1 TDD Note 6	

SSB configuration	Config 1,2		SSB.3 FR2	N/A	SSB.3 FR2	N/A	SSB.3 FR2
CSI reporting periodicity	Config 1,2	ms	5	5		N/A	
reportConfigType for CSI reporting	Config 1,2		-	Periodic		N/A	
reportConfigType for L1-RSRP	Config 1,2		periodic	-		N/A	
reportQuantity for CSI reporting	Config 1,2		-	cri-RI-PMI-CQI		-	
reportQuantity for L1-RSRP	Config 1,2		ssb-Index-RSRP	-		N/A	
CSI reporting periodicity	Config 1,2		-	40		40	
L1-RSRP reporting periodicity Note 7	Config 1,2		40	-		N/A	
CSI reporting offset	Config 1,2		-	4		4	
L1-RSRP reporting offset	Config 1,2		4	-		N/A	
OCNG Patterns			OP.1				
SMTC configuration			SMTC.1				
EPRE ratio of PSS to SSS		dB	0				
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
Propagation condition		-	AWGN				

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: Void
Note 4: Void
Note 5: Void
Note 6: CSI-RS for CSI measurement is (re)configured in the next DL slot after slot m+$T_{L1\text{-}RSRP}$ during T2.
Note 7: L1-RSRP measurement and reporting are configured to the the UE prior to the start of time period T1.

Table A.7.5.3.11.2.1-4: OTA related test parameters for FR2 PUCCH SCell activation

Parameter Note 6	Unit	Cell 2			Cell 3		
		T1	T2	T3	T1	T2	T3
Angle of arrival configuration		Setup 1 according to A.3.15.1					
Assumption for UE beams Note 7		Rough			Rough		
N_{oc} Note1	dBm/15kHz Note4	-112			-112		
N_{oc} Note1	dBm/SCS Note 3	-102.97			-102.97		
$\hat{E}_s / N_{oc}$	dB	-∞	14	14	-∞	14	14
SS-RSRP Note2	dBm/SCS Note4	-∞	-88.97	-88.97	-∞	-88.97	-88.97
$\hat{E}_s / I_{ot}$	dB	-∞	14	14	-∞	14	14
Io Note2	dBm/95.04 MHz Note4	-73.98	-59.81	-59.81	-73.98	-59.81	-59.81

Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5:	As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6:	All parameters apply for configuration 1 and 2
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.5.3.11.2.2 Test Requirements

During T2 the UE shall start sending a valid L1-RSRP report of the SCell to the PCell in the configured slots for CSI reporting after slot (m+$T_{L1\text{-}RSRP}$), where $T_{L1\text{-}RSRP}$ is no larger than 3ms + $T_{FirstSSB_MAX}$ + 15*T_{SMTC_MAX} + 8*T_{rs} + $T_{L1\text{-}RSRP,\ measure}$ + $T_{L1\text{-}RSRP,\ report}$ as defined in clause 8.3.2.

During T2, if the test is based on the test configuration 1, the UE shall start sending CSI reports of the PUCCH SCell (Cell 2) and the non-PUCCH SCell (Cell 3) with non-zero CQI index via PUCCH on the PUCCH SCell (Cell 2) and PCell (Cell 1), respectively, no later than slot m + (T_{HARQ} + $T_{delay_multiple_SCells_PUCCH_SCell}$)/NR slot length and slot m + (T_{HARQ} + $T_{delay_multiple_SCells_other_SCell}$)/NR slot length, respectively. Here, $T_{delay_multiple_SCells_PUCCH_SCell}$ and $T_{delay_multiple_SCells_other_SCell}$ are the PUCCH SCell activation delay and other SCell activation delay defined in 8.3.13 for a valid TA scenario.

During T2, if the test is based on the test configuration 2, the UE shall start sending CSI reports of the PUCCH SCell (Cell 2) and the non-PUCCH SCell (Cell 3) with non-zero CQI index via PUCCH on the PUCCH SCell (Cell 2) and PCell (Cell 1), respectively, no later than slot m + (T_{HARQ} + $T_{delay_multiple_SCells_PUCCH_SCell}$)/NR slot length and slot m + (T_{HARQ} + $T_{delay_multiple_SCells_other_SCell}$)/NR slot length, respectively. Here, $T_{delay_multiple_SCells_PUCCH_SCell}$ and $T_{delay_multiple_SCells_other_SCell}$ are the PUCCH SCell activation delay and other SCell activation delay defined in 8.3.13 for an invalid TA scenario.

During T3 the UE shall stop sending CSI reports on the PUCCH SCell no later than slot n + $\frac{T_{HARQ}+3ms}{NR\ slot\ length}$, as defined in clause 8.3.15.

During T2 interruption of PCell during the SCell activation shall not happen outside the slot $m + 1 + \frac{T_{HARQ}}{\text{NR slot length}}$ to $m + 1 + \frac{T_{HARQ}+3ms+T_X}{\text{NR slot length}}$, as defined in clause 8.3, where T_X =20ms. If the UE is not capable of parallelTxPRACH-SRS-PUCCH-PUSCH additional interruption can be allowed as defined in Clause 8.2.2.2.18.

During T3 the starting point of interruption of PCell during SCell deactivation shall not happen outside the slot n + $1 + \frac{T_{HARQ}}{NR\ slot\ length}$ to n + $1 + \frac{T_{HARQ}+3ms}{NR\ slot\ length}$, as defined in clause 8.3.15.

The interruption of PCell due to activation of SCells shall not be more than the values specified for SA in Clause 8.2.2.2.18.

A.7.5.3.12 PSCell RACH-less based Activation and deactivation for FR1+FR2 inter-band with target PSCell in FR2

A.7.5.3.12.1 Test Purpose and Environment

The purpose of this test case is to test the activation PSCell delay for a UE configured with one deactivated SCG in NR-DC and when PScell in one SCG is being activated. The test also tests the deactivation delay. The test case tests

the requirements within which the UE shall be able to activate the deactivated SCG in section 8.17.2 for RACH-less based conditions when PSCell and TCI state are known. The PCell is in NR FR1 and the PSCell is in NR FR2.

The supported test configurations are defined in Table A.7.5.3.12.1-1. And cell specific test parameters are described in Tables A.7.5.3.12.1-2. OTA related test parameters are defined in Table A.7.5.3.12.1-3.

At the beginning of T1 the UE is configured with a PSCell which is activated. At T1 the PSCell is deactivated. PSCell is configured with *bfd-and-RLM* with value *true*.

An RRC message for activation of PSCell is sent by the test equipment 1s after the RRC message deactivating the PSCell, in a slot # denoted m. The point in time at which the RRC message for activation of PSCell is received at the UE defines the start of time period T2.

During T2, the test equipment monitors for SR from the UE on the PSCell. The time when test equipment receives a scheduling request from the UE is denoted as slot T3.

Time period T4 starts when a RRC message for deactivation of the PSCell, sent from the test equipment to the UE in a slot # denoted n, is received at the UE.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell during activation and deactivation of the PSCell, respectively.

The test equipment verifies the activation time by when the SR from the UE is received in the activated PSCell.

The test equipment verifies the deactivation time by counting the slots from the time when the PSCell deactivation command is sent until UL transmission from the PSCell is discontinued.

Table A.7.5.3.12.1-1: Supported test configurations for FR2 PSCell activation case

Configuration	Description
1	PCell: 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode Target PSCell: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
2	PCell: 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode Target PSCell: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
3	PCell: 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode Target PSCell: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations	

Table A.7.5.3.12.1-2: Cell specific test parameters for FR2 PSCell activation case

Parameter[Note 5]		Unit	Cell 1				Cell 2			
			T1	T2	T3	T4	T1	T2	T3	T4
SSB ARFCN			Freq1				Freq2			
Duplex mode	Config 1		FDD				TDD			
	Config 2,3		TDD							
TDD configuration	Config 1		Not Applicable				TDDConf.3.1			
	Config 2		TDDConf.1.1							
	Config 3		TDDConf.2.1							
Downlink initial BWP Configuration	Config 1,2,3		DLBWP.0.1							
Downlink dedicated BWP Configuration	Config 1,2,3		DLBWP.1.1							
Uplink initial BWP configuration	Config 1,2,3		ULBWP.0.1							
Uplink dedicated BWP configuration	Config 1,2,3		ULBWP.1.1							
TRS configuration	Config 1,2,3		N/A				TRS.2.1 TDD			
TCI state	Config 1,2,3		TCI.State.0							
$BW_{channel}$	Config 1,2	MHz	10: $N_{RB,c}$ = 52				100: $N_{RB,c}$ = 66			

	Config 3		40: $N_{RB,c}$ = 106							
Data RBs allocated	Config 1,2		52	66	66	52	66	52	52	66
	Config 3		106			106		106	106	
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD				-			
	Config 2		SR.1.1 TDD							
	Config 3		SR.2.1 TDD							
RMSI CORESET Parameters	Config 1		CR.1.1 FDD				-			
	Config 2		CR.1.1 TDD							
	Config 3		CR.2.1 TDD							
Dedicated CORESET Parameters	Config 1		CCR.1.1 FDD				-			
	Config 2		CCR.1.1 TDD							
	Config 3		CCR.2.1 TDD							
OCNG Patterns			OP.1							
SSB configuration	Config 1,2		SSB.1 FR1				SSB.3 FR2			
	Config 3		SSB.2 FR1							
CSI-RS configuration for CSI reporting	Config 1~3		N/A				CSI-RS.3.1 TDD			
reportConfigType for CSI reporting			periodic				N/A			
reportConfigType for L1-RSRP			periodic				N/A			
reportQuantity for CSI reporting			cri-RI-PMI-CQI				N/A			
reportQuantity for L1-RSRP			ssb-Index-RSRP				N/A			
CSI reporting periodicity	Config 1,2	slot	5				N/A			
	Config 3		10							
L1-RSRP reporting periodicity Note 7	Config 1,2	slot	5				N/A			
	Config 3		10							
CSI reporting offset	Config 1,2	slot	2				N/A			
	Config 3		4							
L1-RSRP reporting offset	Config 1,2	slot	2				N/A			
	Config 3		4							
SMTC configuration			SMTC.1							
EPRE ratio of PSS to SSS		dB	0							
EPRE ratio of PBCH_DMRS to SSS										
EPRE ratio of PBCH to PBCH_DMRS										
EPRE ratio of PDCCH_DMRS to SSS										
EPRE ratio of PDCCH to PDCCH_DMRS										
EPRE ratio of PDSCH_DMRS to SSS										
EPRE ratio of PDSCH to PDSCH_DMRS										
EPRE ratio of OCNG DMRS to SSS Note 1										
EPRE ratio of OCNG to OCNG DMRS Note 1										
Propagation conditions			N/A Link only, see clause A.3.7A				AWGN			
Scheduling request resource priodicity		ms	N/A				20			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: Void
Note 4: Void
Note 5: All parameters apply for configuration 1, 2 and 3
Note 6: Void.
Note 7: L1-RSRP measurement and reporting are configured to the the UE prior to the start of time period T1.

Table A.7.5.3.12.1-3: OTA related test parameters for FR1 PCell with FR2 PSCell activation case

Parameter		Unit	Cell 1				Cell 2			
			T1	T2	T3	T4	T1	T2	T3	T4
Angle of arrival configuration			N/A				According to clause A.3.15.1			
Assumption for UE beams Note 7			N/A				Rough			
N_{oc} Note 1	Config 1,2,3	dBm/15kHz	Link only, see clause A.3.7A				-104.7			
N_{oc} Note 1	Config 1,2,3	dBm/SCS					-95.7			
$\hat{E}_s / N_{oc}$	Config 1,2,3	dB					7			
[illegible]	Config 1,2,3	dB					7			
SSB_RP Note 2, Note 4	Config 1,2,3	dBm/SCS					-88.7			
Io Note 2, Note 4	Config 1,2,3	dBm/95.04 MHz					-58.92			

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: Void
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: Void
Note 6: Void
Note 7: Information about types of UE beam is given in B.2.1.3 and does not imit UE implementation or test system implementation.

A.7.5.3.12.2 Test Requirements

During T2 the UE shall send the first SR on PSCell in the first available uplink SR resource no later than T3 which is:

$T_{RRC_delay} + T_{processing} + T_{search} + T_{\Delta} + T_{IU} + 2$ ms

as defined on section 8.17.2. In this test case:

- $T_{processing}$ = 5ms (no RRC parameter has been modified),
- T_{search} = 0ms (RACH-less based PSCell activation, with RLM and BFD are configured, PSCell and TCI state are known), and
- T_{Δ} = 20ms.

This allows T3 of $[T_{RRC_delay} + T_{IU} + 27]$ms

During T4 the UE shall stop all transmissions on the PSCell no later than in slot n + $\frac{T_{RRC_delay}}{NR\ slot\ length}$ as defined in 8.17.3.

During T2 the interruption of PCell during PSCell activation shall not happen outside the slot $m + T_{RRC_delay}$.

During T4 the interruption of PCell during PSCell deactivation shall not happen outside the slot $n + T_{RRC_delay}$.

The interruption duration on PCell due to activation and deactivation of PSCell shall not be more than the values specified for in Clause 8.17.2 and 8.17.3.

A.7.5.3.13 SCell Activation for SCell in FR2 intra-band in non-DRX

A.7.5.3.13.1 Test Purpose and Environment

The purpose of this test case is the same as for the test defined in clause A.7.5.3.13.1 except the PCell and SCell are in FR2 intra-band.

The supported test configurations are shown in table A.7.5.3.13.1-1 below. The general test parameters are the same as defined in Table A.7.5.3.13.1-2 except those described in Tables A.7.5.3.13.1-2, and cell specific test parameters are described in Tables A.7.5.3.13.1-3. OTA related test parameters are shown in table A.7.5.3.13.1-4 below.

Table A.7.5.3.13.1-1: Supported test configurations for FR2 SCell activation case

Configuration	Description
1	NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode

Table A.7.5.3.13.1-2: General test parameters for FR2 SCell activation case

Parameter	Unit	Value	Comment
RF Channel Number		1,2	Two NR radio channels are used for this test, cell 1 and cell2 use RF channel 1 and 2, respectively.

Table A.7.5.3.13.1-3: Cell specific test parameters for FR2 SCell activation case

Parameter[Note 5]	Unit	Cell 1		Cell 2	
		T1	T2	T1	T2
SSB ARFCN		freq1		freq2	
Duplex mode		TDD			
TDD configuration		TDDConf.3.1			
Downlink initial BWP Configuration		DLBWP.0.1			
Downlink dedicated BWP Configuration		DLBWP.1.1			
Uplink initial BWP configuration		ULBWP.0.1			
Uplink dedicated BWP configuration		ULBWP.1.1			
TRS configuration		TRS.2.1 TDD			
TCI state		TCI.State.0			
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66			
Data RBs allocated		66	66		66
PDSCH Reference measurement channel		SR.3.1 TDD		-	
RMSI CORESET Parameters		CR.3.1 TDD		-	
Dedicated CORESET Parameters		CCR.3.1 TDD		-	
OCNG Patterns		OP.1			
SSB Configuration		SSB.1 FR2			
Aperiodic CSI-RS for Scell activation		TRS.2.3 TDD			
gapBetweenBursts	Slot	N/A			
SMTC Configuration		SMTC.1			
CSI-RS configuration for CSI reporting		CSI-RS.3.1 TDD			
reportConfigType		periodic		N/A	
reportQuantity		cri-RI-PMI-CQI		N/A	
CSI reporting periodicity	slot	40		N/A	
CSI reporting offset	slot	4		N/A	
EPRE ratio of PSS to SSS	dB	0			
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					

EPRE ratio of PDCCH_DMRS to SSS		
EPRE ratio of PDCCH to PDCCH_DMRS		
EPRE ratio of PDSCH_DMRS to SSS		
EPRE ratio of PDSCH to PDSCH_DMRS		
EPRE ratio of OCNG DMRS to SSS Note 1		
EPRE ratio of OCNG to OCNG DMRS Note 1		
Propagation conditions		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Void Note 3: Void Note 4: Void Note 5: Void		

Table A.7.5.3.13.1-4: OTA related test parameters for FR2 SCell activation case

Parameter	Unit	Cell 1		Cell 2	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 1 according to table A.3.15.1		Setup 1 according to table A.3.15.1	
Assumption for UE beams Note 7		Rough		Rough	
N_{oc} Note1	dBm/15kHz Note4	-104.7		-104.7	
N_{oc} Note1	dBm/SCS Note 3	-95.7		-95.7	
$\hat{E}_s / N_{oc}$	dB	7		7	
SSB_RP Note2	dBm/SCS Note4	-88.7		N/A	
CSI_RP Note2	dBm/SCS Note4	N/A		-88.7	
$\hat{E}_s / I_{ot}$	dB	7		7	
Io Note2	dBm/95.04 MHz Note4	-58.92		-58.92	
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: Es/Iot, SSB_RP, CSI_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: Void Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone Note 5: Void Note 6: Void Note 7: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.					

A.7.5.3.13.2 Test Requirements

The test requirements defined in clause A.7.5.3.13.1 shall apply to this test case, except $T_{activation_time}$ will be replaced with the value $T_{FirstATRS}$ + 5ms as defined in clause 8.3.16.

A.7.5.3.14 SCell Activation for known SCell in FR2 inter-band

A.7.5.3.14.1 Test Purpose and Environment

The purpose of this test case is the same as for the test defined in clause A.7.5.3.14.1 except the PCell and SCell are in FR2 inter-band, when the SCell in FR2 is known by the UE at the time of activation.

The supported test configurations are shown in table A.7.5.3.14.1-1 below. The general test parameters are described in Tables A.7.5.3.14.1-2, and cell specific test parameters are described in Tables A.7.5.3.14.1-3. OTA related test parameters a A.7.5.3.14.1re shown in table A.7.5.3.14.1-4 below.

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 2) becomes configured on NR. The UE now starts monitoring the SCell. The test equipment sends a MAC message for activation of the SCell triggering the aperiodic CSI-RS for fast SCell activation.

The point in time at which the MAC message is received at the UE antenna connector, in a slot # denoted m (where m mode 20=1), defines the start of time period T2. The UE shall be able to report valid CSI in PSCell for the activated SCell at latest in slot $m + \frac{T_{\text{HARQ}} + T_{\text{activation_time}} + T_{\text{CSI_Reporting}}}{\text{NR slot length}}$, as defined in clause 8.3.6. The UE shall start reporting CSI in PSCell after at least one CSI-RS transmission occasion for channel measurement and reporting after slot (m+k) and shall report CQI index 0 (out-of-range) until the SCell activation has been completed. Any PSCell interruption due to activation of SCell shall occur in the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to slot $m + 1 + \frac{T_{\text{HARQ}} + 3\text{ms} + T_{\text{X}}}{\text{NR slot length}} + N_{\text{interruption}}$, as defined in clause 8.3, where $N_{\text{interruption}}$ is the interruption length given in clause 8.2

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell and PSCell during activation of SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received.

Table A.7.5.3.14.1-1: Supported test configurations for FR2 SCell activation in FR2 inter-band

Configuration	Description
1	NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode

Table A.7.5.3.14.1-2: General test parameters for FR2 SCell activation in FR2 inter-band

Parameter	Unit	Value	Comment
RF Channel Number		1,2	Two NR radio channels are used for this test. RF channel number 1 is in band 1 and RF channel number 2 is in band 2, where bands 1 and 2 are inter-band CA operating bands in FR2 as specified in Table 5.2A.2-1 in TS38.101-2.
Active PCell		Cell 1	Primary cell on NR RF channel number 1.
Configured deactivated SCell		Cell 2	Configured deactivated secondary cell on NR RF channel number 2.
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
CQI/PMI periodicity and offset configuration index		0	CQI reporting for SCell every second subframe
Cell-individual offset for cells on NR channel number	dB	0	Individual offset for cells on primary component carrier.
SCell measurement cycle (measCycleSCell)	ms	160	

Cell2 timing offset to cell1	µs	≤8	A random value from 0µs to 8µs
T1	s	7	During this time the PCell shall be known and the SCell configured and detected.
T2	s	2	During this time the UE shall activate the SCell.
T_{HARQ}	ms	k_1×NR slot length	k_1 is a number of slots and is indicated by the PDSCH-to-HARQ-timing-indicator field in the DCI format, if present, or provided by *dl-DataToUL-ACK*, the value of k should be the minimum value defined in TS 38.213 [3] depends on UE's capability
$T_{CSI_Reporting}$	ms	2	the delay uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2]

Table A.7.5.3.14.1-3: Cell specific test parameters for FR2 SCell activation in FR2 inter-band

Parameter[Note 5]	Unit	T1		T2	
		Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN		freq1	freq2	freq1	freq2
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
Downlink initial BWP Configuration		DLBWP.0.1		DLBWP.0.1	
Downlink dedicated BWP Configuration		DLBWP.1.1		DLBWP.1.1	
Uplink initial BWP configuration		ULBWP.0.1		ULBWP.0.1	
Uplink dedicated BWP configuration		ULBWP.1.1		ULBWP.1.1	
TRS configuration		TRS.2.1 TDD		TRS.2.1 TDD	
TCI state		TCI.State.0		TCI.State.0	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Parameters		CR.3.1 TDD	-	CR.3.1 TDD	-
Dedicated CORESET Parameters		CCR.3.1 TDD	-	CCR.3.1 TDD	-
CSI-RS configuration		NA	NA	NA	CSI-RS.3.1 TDD [Note 2]
CSI reporting periodicity [Note 3]		NA	5	NA	5
OCNG Patterns		OP.1			
SSB Configuration		SSB.1 FR2			
SMTC Configuration		SMTC.1			
Aperiodic CSI-RS for Scell activation		-	-	-	TRS.2.3 TDD
gapBetweenBursts	Slot	N/A		0	
EPRE ratio of PSS to SSS	dB	0			
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS[Note 1]					
EPRE ratio of OCNG to OCNG DMRS [Note 1]					
Propagation conditions		AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: CSI-RS for CSI measurement is (re)configured in the next DL slot after slot m+$T_{L1\text{-}RSRP}$ during T2.
Note 3: L1-RSRP measurement and reporting are configured to the the UE prior to the start of time period T1.

Table A.7.5.3.14.1-4: OTA related test parameters for FR2 SCell activation in FR2 inter-band

Parameter[Note 6]	Unit	Cell 1		Cell 2	
		T1	T2	T1	T2
AoA setup		Setup 3 as specified in clause A.3.15			
		AoA1		AoA2	
Assumption for UE beams [Note 7]		Rough		Rough	
N_{oc} [Note1]	dBm/15kHz[Note4]	-92.1		-92.1	
N_{oc} [Note1]	dBm/SCS[Note3]	-83.1		-83.1	
$\hat{E}_s / N_{oc}$	dB	0		0	
SS-RSRP[Note2]	dBm/SCS [Note4]	-83.1		N/A	
CSI-RSRP[Note2]	dBm/SCS [Note4]	N/A		-83.1	
$\hat{E}_s / I_{ot}$	dB	0		0	
Io[Note2]	dBm/95.04 MHz [Note4]	-51.1		-51.1	

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6: All parameters apply for configuration 1
Note 7: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.

A.7.5.3.14.2 Test Requirements

During T2 the UE shall start sending CSI report for the SCell in the configured slots for CSI reporting after at least one CSI-RS transmission occasion for channel measurement and reporting after slot (m+k). UE shall send the first CSI report for SCell after receiving at least one CSI-RS transmission occasion for channel measurement and reporting after slot (m+k), or in the next available uplink resource for CSI reporting if the slot was subject to interruption. Whether CSI report in a slot was interrupted is checked by monitoring ACK/NACK sent in PCell in the slot.

During T2, the UE shall start sending CSI reports for the SCell with non-zero CQI index in the configured slots for CSI reporting no later than slot $m + \frac{T_{HARQ} + T_{activtion_time} + T_{CSI_Reporting}}{NR\ slot\ length}$, where

- T_{HARQ} is defined in Table A.7.5.3.14.1-2
- $T_{activation_time} = \max(T_{FirstATRS} + 5ms, T_{uncertainty_RRC} + T_{RRC_delay} - T_{HARQ})$
- $T_{CSI_Reporting} = 10ms$
- NR slot length is 0.125ms for this test case.

During T2, the interruption of PCell during SCell activation shall not happen outside the slot $m + 1 + \frac{T_{HARQ}}{\text{NR slot length}}$ to $m + 1 + \frac{T_{HARQ} + 3ms + T_X}{\text{NR slot length}}$, where T_X =4ms.

A.7.5.15 PSCell RACH-less based Activation and deactivation for FR1+FR2 inter-band with target PSCell in FR2

A.7.5.15.3.1 Test Purpose and Environment

The purpose of this test case is to test the activation PSCell delay for a UE configured with one deactivated SCG in NR-DC and when PScell in one SCG is being activated. The test also tests the deactivation delay. The test case tests the requirements within which the UE shall be able to activate the deactivated SCG in section 8.17.2 for RACH-less based conditions when PSCell and TCI state are known. The PCell is in NR FR1 and the PSCell is in NR FR2.

The supported test configurations are defined in Table A.7.5.15.3.1-1. And cell specific test parameters are described in Tables A.7.5.15.3.1-2. OTA related test parameters are defined in Table A.7.5.15.3.1-3.

At the beginning of T1 the UE is configured with a PSCell which is activated. At T1 the PSCell is deactivated. PSCell is configured with *bfd-and-RLM* with value *true*.

An RRC message for activation of PSCell is sent by the test equipment 1s after the RRC message deactivating the PSCell, in a slot # denoted m. The point in time at which the RRC message for activation of PSCell is received at the UE defines the start of time period T2.

During T2, the test equipment monitors for SR from the UE on the PSCell. The time when test equipment receives a scheduling request from the UE is denoted as slot T3.

Time period T4 starts when a RRC message for deactivation of the PSCell, sent from the test equipment to the UE in a slot # denoted n, is received at the UE.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell during activation and deactivation of the PSCell, respectively.

The test equipment verifies the activation time by when the SR from the UE is received in the activated PSCell.

The test equipment verifies the deactivation time by counting the slots from the time when the PSCell deactivation command is sent until UL transmission from the PSCell is discontinued.

Table A.7.5.15.3.1-1: Supported test configurations for FR2 PSCell activation case

Configuration	Description
1	PCell: 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode Target PSCell: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
2	PCell: 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode Target PSCell: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
3	PCell: 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode Target PSCell: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations	

Table A.7.5.15.3.1-2: Cell specific test parameters for FR2 PSCell activation case

Parameter[Note 5]		Unit	Cell 1				Cell 2			
			T1	T2	T3	T4	T1	T2	T3	T4
SSB ARFCN			Freq1				Freq2			
Duplex mode	Config 1		FDD				TDD			
	Config 2,3		TDD							
TDD configuration	Config 1		Not Applicable			TDDConf.3.1				
	Config 2		TDDConf.1.1							
	Config 3		TDDConf.2.1							
Downlink initial BWP Configuration	Config 1,2,3		DLBWP.0.1							
Downlink dedicated BWP Configuration	Config 1,2,3		DLBWP.1.1							

Uplink initial BWP configuration	Config 1,2,3		ULBWP.0.1								
Uplink dedicated BWP configuration	Config 1,2,3		ULBWP.1.1								
TRS configuration	Config 1,2,3		N/A				TRS.2.1 TDD				
TCI state	Config 1,2,3		TCI.State.0								
$BW_{channel}$	Config 1,2	MHz	10: $N_{RB,c}$ = 52				100: $N_{RB,c}$ = 66				
	Config 3		40: $N_{RB,c}$ = 106								
Data RBs allocated	Config 1,2		52	66	66	52	66	52	52	66	
	Config 3		106			106		106	106		
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD				-				
	Config 2		SR.1.1 TDD								
	Config 3		SR.2.1 TDD								
RMSI CORESET Parameters	Config 1		CR.1.1 FDD				-				
	Config 2		CR.1.1 TDD								
	Config 3		CR.2.1 TDD								
Dedicated CORESET Parameters	Config 1		CCR.1.1 FDD				-				
	Config 2		CCR.1.1 TDD								
	Config 3		CCR.2.1 TDD								
OCNG Patterns			OP.1								
SSB configuration	Config 1,2		SSB.1 FR1				SSB.3 FR2				
	Config 3		SSB.2 FR1								
CSI-RS configuration for CSI reporting	Config 1~3		N/A				CSI-RS.3.1 TDD				
reportConfigType for CSI reporting			periodic				N/A				
reportConfigType for L1-RSRP			periodic				N/A				
reportQuantity for CSI reporting			cri-RI-PMI-CQI				N/A				
reportQuantity for L1-RSRP			ssb-Index-RSRP				N/A				
CSI reporting periodicity	Config 1,2	slot	5				N/A				
	Config 3		10								
L1-RSRP reporting periodicity Note 7	Config 1,2	slot	5				N/A				
	Config 3		10								
CSI reporting offset	Config 1,2	slot	2				N/A				
	Config 3		4								
L1-RSRP reporting offset	Config 1,2	slot	2				N/A				
	Config 3		4								
SMTC configuration			SMTC.1								
EPRE ratio of PSS to SSS		dB	0								
EPRE ratio of PBCH_DMRS to SSS											
EPRE ratio of PBCH to PBCH_DMRS											
EPRE ratio of PDCCH_DMRS to SSS											
EPRE ratio of PDCCH to PDCCH_DMRS											
EPRE ratio of PDSCH_DMRS to SSS											
EPRE ratio of PDSCH to PDSCH_DMRS											
EPRE ratio of OCNG DMRS to SSS Note 1											
EPRE ratio of OCNG to OCNG DMRS Note 1											
Propagation conditions			N/A Link only, see clause A.3.7A				AWGN				
Scheduling request resource priodicity		ms	N/A				20				

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: Void
Note 4: Void
Note 5: All parameters apply for configuration 1, 2 and 3
Note 6: Void.
Note 7: L1-RSRP measurement and reporting are configured to the the UE prior to the start of time period T1.

Table A.7.5.15.3.1-3: OTA related test parameters for FR1 PCell with FR2 PSCell activation case

Parameter		Unit	Cell 1				Cell 2			
			T1	T2	T3	T4	T1	T2	T3	T4
Angle of arrival configuration			N/A				According to clause A.3.15.1			
Assumption for UE beams Note 7			N/A				Rough			
N_{oc} Note 1	Config 1,2,3	dBm/15kHz	Link only, see clause A.3.7A				-104.7			
N_{oc} Note 1	Config 1,2,3	dBm/SCS					-95.7			
$\hat{E}_s / N_{oc}$	Config 1,2,3	dB					7			
[illegible]	Config 1,2,3	dB					7			
SSB_RP Note 2, Note 4	Config 1,2,3	dBm/SCS					-88.7			
Io Note 2, Note 4	Config 1,2,3	dBm/95.04 MHz					-58.92			

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: Void
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: Void
Note 6: Void
Note 7: Information about types of UE beam is given in B.2.1.3 and does not imit UE implementation or test system implementation.

A.7.5.3.2.2 Test Requirements

During T2 the UE shall send the first SR on PSCell in the first available uplink SR resource no later than T3 which is:

$T_{RRC_delay} + T_{processing} + T_{search} + T_{\Delta} + T_{IU} + 2$ ms

as defined on section 8.17.2. In this test case:

$T_{processing}$ = 5ms (no RRC parameter has been modified),

T_{search} = 0ms (RACH-less based PSCell activation, with RLM and BFD are configured, PSCell and TCI state are known), and

T_{Δ} = 20ms.

This allows T3 of $[T_{RRC_delay} + T_{IU} + 27]$ms

During T4 the UE shall stop all transmissions on the PSCell no later than in slot n + $\frac{T_{RRC_delay}}{NR\ slot\ length}$ as defined in 8.17.3.

During T2 the interruption of PCell during PSCell activation shall not happen outside the slot $m + T_{RRC_delay}$.

During T4 the interruption of PCell during PSCell deactivation shall not happen outside the slot $n + T_{RRC_delay}$.

The interruption duration on PCell due to activation and deactivation of PSCell shall not be more than the values specified for in Clause 8.17.2 and 8.17.3.

A.7.5.4 Void

A.7.5.5 Beam Failure Detection and Link recovery procedures

A.7.5.5.1 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with SSB-based BFD and LR in non-DRX mode

A.7.5.5.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR2 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.7.5.5.1.1-1, A.7.5.5.1.1-2, A.7.5.5.1.1-3 and A.7.5.5.1.1-4 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.7.5.5.1.1-1 shows the variation of the downlink SNR of the SSB in set q_0 in the active cell to emulate SSB based beam failure. Figure A.7.5.5.1.1-2 shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test 1.

Table A.7.5.5.1.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth
2	TDD duplex mode, 240 kHz SSB SCS, 100 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR2	

Table A.7.5.5.1.1-2: General test parameters for FR2 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter	Test Config.	Unit	Value	Comment
			Test 1	
Active PCell	1-2		Cell 1	
RF Channel Number	1-2		1	
Duplex mode	1-2		TDD	
TDD Configuration	1-2		TDDConf.3.1	
$BW_{channel}$	1-2		100: $N_{RB,c}$ = 66	
Data RBs allocated	1-2		66	

PDSCH/PDCCH subcarrier spacing		1-2	kHz	120	
DL initial BWP configuration		1-2		DLBWP.0.1	
DL dedicated BWP configuration		1-2		DLBWP.1.1	
UL initial BWP configuration		1-2		ULBWP.0.1	
UL dedicated BWP configuration		1-2		ULBWP.1.1	
PDSCH Reference Channel		1		SR.3.2 TDD	
		2		SR.3.3 TDD	
RMSI CORESET Reference Channel		1		CR.3.1 TDD	
		2		CR.3.2 TDD	
Dedicated CORESET Reference Channel		1		CCR.3.1 TDD	
		2		CCR.3.7 TDD	
OCNG parameters		1-2		OP.1	
CP length		1-2		Normal	
PDSCH/PDCCH TCI state		1-2		TCI.State.0	
CSI-RS for tracking		1-2		TRS.2.1 TDD	
SSB Configuration		1		SSB.1 FR2	
		2		SSB.2 FR2	
SMTC Configuration		1-2		SMTC.3	
PRACH Configuration		1-2		FR2 PRACH configuration 2	A.3.8.3.2
DRX configuration		1-2		OFF	
SSB index assigned as BFD RS (q_0)		1-2		0	
SSB index assigned as CBD RS (q_1)		1-2		1	
SSB index assigned as RLM RS		1-2		0,1	
Beam failure detection transmission parameters	DCI format	1-2		1-0	
	Number of Control OFDM symbols	1-2		2	
	Aggregation level	1-2	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1-2	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1-2	dB	0	
	DMRS precoder granularity	1-2		REG bundle size	
	REG bundle size	1-2		6	
Gap pattern ID		1-2		gp0	
gapOffset		1-2	ms	0	
rlmInSyncOutOfSyncThreshold		1-2		absent	Value 0 is applied. (Table 8.1.1-1).
rsrp-ThresholdSSB		1	dBm/SCS	-95	Threshold used for $Q_{in_LR_SSB}$
		2		-92	
powerControlOffsetSS		1-2		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount		1-2		n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer		1-2		pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting		1-2		CSI-RS.3.1 TDD	
reportConfigType		1-2		periodic	
reportQuantity		1-2		cri-RI-PMI-CQI	
CSI reporting periodicity		1-2	slot	40	
CSI reporting offset		1-2	slot	4	
T310		1-2	ms	1000	
N310		1-2		2	

T1	1-2	s	1	The UE shall be fully synchronized to cell 1 during T1
T2	1-2	s	2.61	
T3	1-2	s	1.64	
T4	1-2	s	0	
T5	1-2	s	1.01	
D1	1-2	s	0.97	
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.7.5.5.1.1-3: Cell specific test parameters for FR2 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
AoA setup			Setup 1 defined in A.3.15				
Assumption for UE beams Note 10			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q_0	Config 1-2	dB	5 Note 11	-3 Note 11	-12	-12	-12
SNR_SSB of set q_1	Config 1-2	dB	0.2	0.2	20.2	20.2	20.2
SSB_RP of set q_1	Config 1	dBm/ SCS	-104.5	-104.5	-84.5	-84.5	-84.5
	Config 2		-101.5	-101.5	-81.5	-81.5	-81.5
N_{oc}	Config 1,2	dBm/120 KHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz				
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1. Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1. Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1. Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1. Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG. Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs. Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.7.5.5.1.1-1. Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6. Note 10: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation. Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband								

Table A.7.5.5.1.1-4: Void

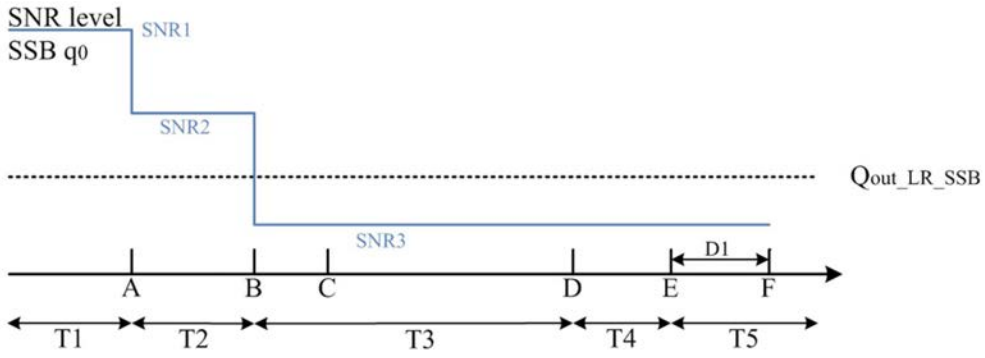

Figure A.7.5.5.1.1-1: SNR variation for SSB-based beam failure detection and link recovery testing in non-DRX mode

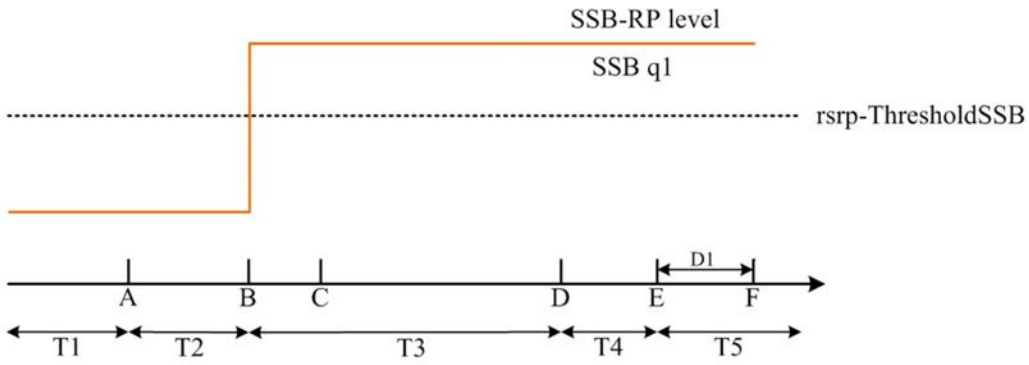

Figure A.7.5.5.1.1-2: SSB_RP level variation for SSB-based beam failure detection and link recovery testing in non-DRX mode

A.7.5.5.1.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 960+10 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.5.2 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with SSB-based BFD and LR in DRX mode

A.7.5.5.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR2 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.7.5.5.2.1-1, A.7.5.5.2.1-2, A.7.5.5.2.1-3, A.7.5.5.2.1-4 and A.7.5.5.2.1-5 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.7.5.5.2.1-1 shows the variation of the downlink SNR of the SSB in set q_0 in the active cell to emulate SSB based beam failure. Figure A.7.5.5.2.1-2 shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.7.5.5.2.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth
2	TDD duplex mode, 240 kHz SSB SCS, 100 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR2	

Table A.7.5.5.2.1-2: General test parameters for FR2 PCell for SSB-based beam failure detection and link recovery testing in DRX mode

Parameter	Test Config.	Unit	Value	Comment
			Test 1	
Active PCell	1-2		Cell 1	
RF Channel Number	1-2		1	
Duplex mode	1-2		TDD	
TDD Configuration	1-2		TDDConf.3.1	
$BW_{channel}$	1-2		100: $N_{RB,c}$ = 66	
Data RBs allocated	1-2		66	
PDSCH/PDCCH subcarrier spacing	1-2	kHz	120	
DL initial BWP configuration	1-2		DLBWP.0.1	
DL dedicated BWP configuration	1-2		DLBWP.1.1	
UL initial BWP configuration	1-2		ULBWP.0.1	
UL dedicated BWP configuration	1-2		ULBWP.1.1	
PDSCH Reference Channel	1		SR.3.2 TDD	
	2		SR.3.3 TDD	
RMSI CORESET Reference Channel	1		CR.3.1 TDD	

		2		CR.3.2 TDD	
Dedicated CORESET Reference Channel		1		CCR.3.1 TDD	
		2		CCR.3.7 TDD	
OCNG parameters		1-2		OP.1	
CP length		1-2		Normal	
PDSCH/PDCCH TCI state		1-2		TCI.State.0	
CSI-RS for tracking		1-2		TRS.2.1 TDD	
SSB Configuration		1		SSB.1 FR2	
		2		SSB.2 FR2	
SMTC Configuration		1-2		SMTC.3	
PRACH Configuration		1-2		FR2 PRACH configuration 2	A.3.8.3.2
DRX configuration		1-2		DRX.3	A.3.3.3
SSB index assigned as BFD RS (q_0)		1-2		0	
SSB index assigned as CBD RS (q_1)		1-2		1	
SSB index assigned as RLM RS		1-2		0,1	
Beam failure detection transmission parameters	DCI format	1-2		1-0	
	Number of Control OFDM symbols	1-2		2	
	Aggregation level	1-2	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1-2	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1-2	dB	0	
	DMRS precoder granularity	1-2		REG bundle size	
	REG bundle size	1-2		6	
Gap pattern ID		1-2		N/A	
rlmInSyncOutOfSyncThreshold		1-2		absent	Value 0 is applied. (Table 8.1.1-1).
rsrp-ThresholdSSB		1	dBm/SCS	-95	Threshold used for $Q_{in_LR_SSB}$
		2		-92	
powerControlOffsetSS		1-2		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount		1-2		n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer		1-2		pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting		1-2		CSI-RS.3.1 TDD	
reportConfigType		1-2		periodic	
reportQuantity		1-2		cri-RI-PMI-CQI	
CSI reporting periodicity		1-2	slot	40	
CSI reporting offset		1-2	slot	4	
T310		1-2	ms	1000	
N310		1-2		2	
T1		1-2	s	1	The UE shall be fully synchronized to cell 1 during T1
T2		1-2	s	3.37	
T3		1-2	s	2.8	
T4		1-2	s	0	
T5		1-2	s	0.61	
D1		1-2	s	0.57	
Note 1: All configurations are assigned to the UE prior to the start of time period T1.					

Note 2: UE-specific PDCCH is not transmitted after T1 starts.

Table A.7.5.5.2.1-3: Cell specific test parameters for FR2 PCell for SSB-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
AoA setup			Setup 1 defined in A.3.15				
Assumption for UE beams Note 10			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q_0	Config 1,2	dB	5 Note 11	-3 Note 11	-12	-12	-12
SNR_SSB of set q_1	Config 1-2	dB	0.2	0.2	20.2	20.2	20.2
SSB_RP of set q_1	Config 1	dBm/SCS	-104.5	-104.5	-84.5	-84.5	-84.5
	Config 2		-101.5	-101.5	-81.5	-81.5	-81.5
N_{oc}	Config 1-2	dBm/120 KHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Void
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.7.5.5.1.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.
Note 10: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband.

Table A.7.5.5.2.1-4: Void

Table A.7.5.5.2.1-5: Void

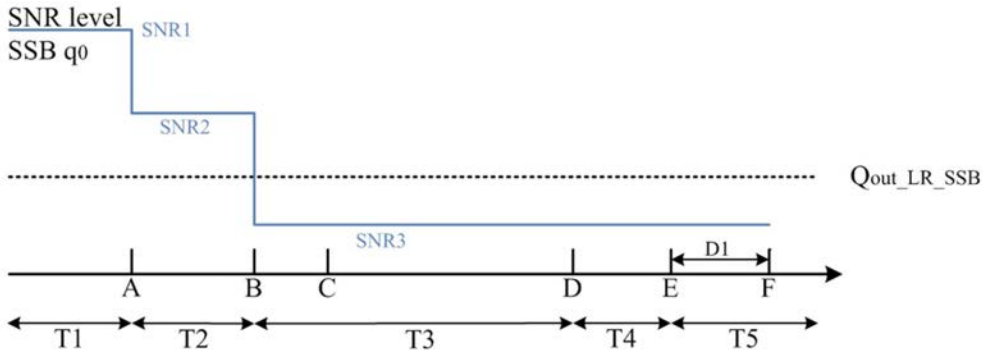

Figure A.7.5.5.2.1-1: SNR variation for SSB-based beam failure detection and link recovery testing in DRX mode

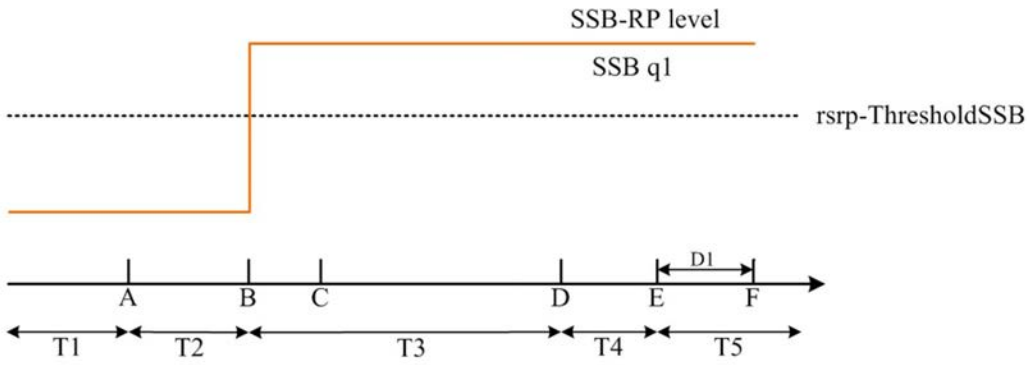

Figure A.7.5.5.2.1-2: SSB_RP level variation for SSB-based beam failure detection and link recovery testing in DRX mode

A.7.5.5.2.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 560+10 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.5.3 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with CSI-RS-based BFD and LR in non-DRX mode

A.7.5.5.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct CSI-RS-based link recovery based on beam candicate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR2 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.7.5.5.3.1-1, A.7.5.5.3.1-2, and A.7.5.5.3.1-3 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.7.5.5.3.1-1 shows the variation of the downlink SNR of the CSI-RS in set q_0 in the active cell to emulate CSI-RS based beam failure. Figure A.7.5.5.3.1-2 shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled.

Table A.7.5.5.3.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Table A.7.5.5.3.1-2: General test parameters for FR2 PCell for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

Parameter	Test Config.	Unit	Value	Comment
			Test 1	
Active PCell	1		Cell 1	
RF Channel Number	1		1	
Duplex mode	1		TDD	
TDD Configuration	1		TDDConf.3.1	
$BW_{channel}$	1		100: $N_{RB,c}$ = 66	
Data RBs allocated	1		66	
PDSCH/PDCCH subcarrier spacing	1	kHz	120	
DL initial BWP configuration	1		DLBWP.0.1	
DL dedicated BWP configuration	1		DLBWP.1.1	
UL initial BWP configuration	1		ULBWP.0.1	
UL dedicated BWP configuration	1		ULBWP.1.1	
PDSCH Reference Channel	1		SR.3.2 TDD	
RMSI CORESET Reference Channel	1		CR.3.1 TDD	
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD	
OCNG parameters	1		OP.1	
CP length	1		Normal	
PDSCH/PDCCH TCI state	1		TCI.State.0	
CSI-RS for tracking	1		TRS.2.1 TDD	
SSB Configuration	1		SSB.1 FR2	
SMTC Configuration	1		SMTC.3	

PRACH Configuration		1		FR2 PRACH configuration 4	A.3.8.3.4
DRX configuration		1		OFF	
CSI-RS configuration for BFD/CBD/RLM		1		CSI-RS.3.2 TDD	A.3.14.2
CSI-RS index assigned as BFD RS (q_0)		1		0	
CSI-RS index assigned as CBD RS (q_1)		1		1	
CSI-RS index assigned as RLM RS		1		0,1	
Beam failure detection transmission parameters	DCI format	1		1-0	
	Number of Control OFDM symbols	1		2	
	Aggregation level	1	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1	dB	0	
	DMRS precoder granularity	1		REG bundle size	
	REG bundle size	1		6	
Gap pattern ID		1		N/A	
rlmInSyncOutOfSyncThreshold		1		absent	Value 0 is applied. (Table 8.1.1-1).
rsrp-ThresholdSSB		1	dBm/SCS	-95	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS		1		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount		1		n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer		1		pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting		1		CSI-RS.3.1 TDD	A.3.14.2
reportConfigType		1		periodic	
reportQuantity		1		cri-RI-PMI-CQI	
CSI reporting periodicity		1	slot	40	
CSI reporting offset		1	slot	4	
T310		1	ms	1000	
N310		1		2	
T1		1	s	1	The UE shall be fully synchronized to cell 1 during T1
T2		1	s	1.17	
T3		1	s	0.9	
T4		1	s	0	
T5		1	s	0.31	
D1		1	s	0.27	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.					

Table A.7.5.5.3.1-3: Cell specific test parameters for FR2 PCell for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5

AoA setup			Setup 1 defined in A.3.15				
Assumptpion for UE beams Note 10			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set q_0	Config 1	dB	5 Note 11	-3 Note 11	-12	-12	-12
SNR_CSI-RS of set q_1	Config 1	dB	0.2	0.2	20.2	20.2	20.2
CSI-RS_RP of set q_1	Config 1	dBm/SCS	-104.5	-104.5	-84.5	-84.5	-84.5
N_{oc}	Config 1	dBm/120 KHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Void
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.7.5.5.3.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.
Note 10: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband

Table A.7.5.5.3.1-4: Void

Table A.7.5.5.3.1-5: Void

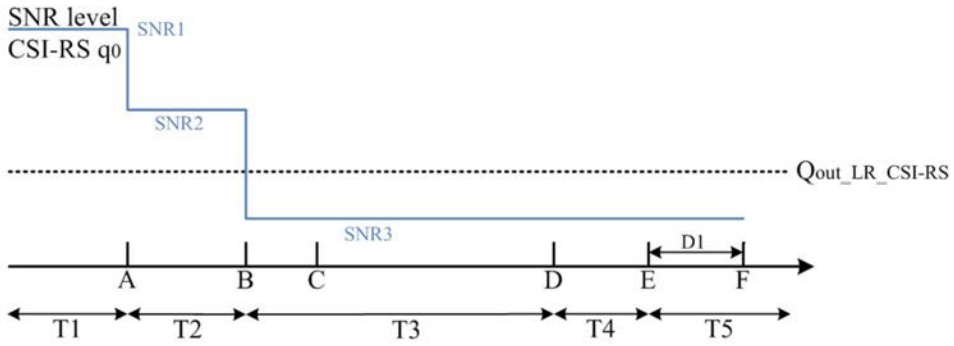

Figure A.7.5.5.3.1-1: SNR variation for CSI-RS based beam failure detection and link recovery testing in non-DRX mode

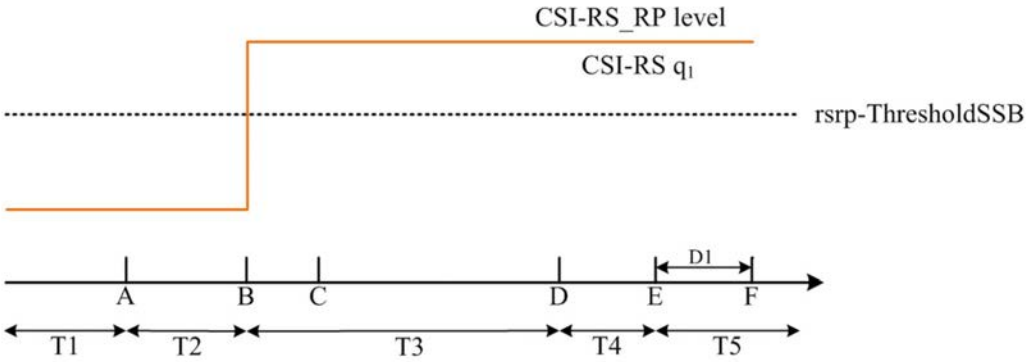

Figure A.7.5.5.3.1-2: CSI-RS_RP level variation for CSI-RS based beam failure detection and link recovery testing in non-DRX mode

A.7.5.5.3.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the shall detect beam failure and initiat link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 260+10 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.5.4 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with CSI-RS-based BFD and LR in DRX mode

A.7.5.5.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct CSI-RS-based link recovery based on beam candicate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR2 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.7.5.5.4.1-1, A.7.5.5.4.1-2, A.7.5.5.4.1-3, and A.7.5.5.4.1-4 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.7.5.5.4.1-1 shows the variation of the downlink SNR of the CSI-RS in set q_0 in the active cell to emulate CSI-RS based beam failure. Figure A.7.5.5.4.1-2 shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting

with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

Table A.7.5.5.4.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Table A.7.5.5.4.1-2: General test parameters for FR2 PCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

Parameter		Test Config.	Unit	Value	Comment
				Test 1	
Active PCell		1		Cell 1	
RF Channel Number		1		1	
Duplex mode		1		TDD	
TDD Configuration		1		TDDConf.3.1	
$BW_{channel}$		1		100: $N_{RB,c}$ = 66	
Data RBs allocated		1		66	
PDSCH/PDCCH subcarrier spacing		1	kHz	120	
DL initial BWP configuration		1		DLBWP.0.1	
DL dedicated BWP configuration		1		DLBWP.1.1	
UL initial BWP configuration		1		ULBWP.0.1	
UL dedicated BWP configuration		1		ULBWP.1.1	
PDSCH Reference Channel		1		SR.3.2 TDD	
RMSI CORESET Reference Channel		1		CR.3.1 TDD	
Dedicated CORESET Reference Channel		1		CCR.3.1 TDD	
OCNG parameters		1		OP.1	
CP length		1		Normal	
PDSCH/PDCCH TCI state		1		TCI.State.0	
CSI-RS for tracking		1		TRS.2.1 TDD	
SSB Configuration		1		SSB.1 FR2	
SMTC Configuration		1		SMTC.3	
PRACH Configuration		1		FR2 PRACH configuration 4	A.3.8.3.4
DRX configuration		1		DRX.3	A.3.3.3
CSI-RS configuration for BFD/CBD/RLM		1		CSI-RS.3.2 TDD	A.3.14.2
CSI-RS index assigned as BFD RS (q_0)		1		0	
CSI-RS index assigned as CBD RS (q_1)		1		1	
CSI-RS index assigned as RLM RS		1		0,1	
Beam failure detection transmission parameters	DCI format	1		1-0	
	Number of Control OFDM symbols	1		2	
	Aggregation level	1	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1	dB	0	
	DMRS precoder granularity	1		REG bundle size	
	REG bundle size	1		6	

Gap pattern ID	1		N/A	
rlmInSyncOutOfSyncThreshold	1		absent	Value 0 is applied. (Table 8.1.1-1).
rsrp-ThresholdSSB	1	dBm/SCS	-95	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS	1		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount	1		n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer	1		pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting	1		CSI-RS.3.1 TDD	A.3.14.2
reportConfigType	1		periodic	
reportQuantity	1		cri-RI-PMI-CQI	
CSI reporting periodicity	1	slot	40	
CSI reporting offset	1	slot	4	
T310	1	ms	1000	
N310	1		2	
T1	1	s	1	The UE shall be fully synchronized to cell 1 during T1
T2	1	s	5.43	
T3	1	s	5.16	
T4	1	s	0	
T5	1	s	0.31	
D1	1	s	0.27	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.7.5.5.4.1-3: Cell specific test parameters for FR2 PCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
AoA setup			Setup 1 defined in A.3.15				
Assumption for UE beams Note 10			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set q_0	Config 1	dB	5 Note 11	-3 Note 11	-12	-12	-12
SNR_CSI-RS of set q_1	Config 1	dB	0.2	0.2	20.2	20.2	20.2
CSI-RS_RP of set q_1	Config 1	dBm/SCS	-104.5	-104.5	-84.5	-84.5	-84.5
N_{oc}	Config 1	dBm/120 KHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz				

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	Void
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.7.5.5.4.1-1.
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.
Note 10:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 11:	This value allows up to 1dB degradation from applied SNR to UE baseband

Table A.7.5.5.4.1-4: Void

Table A.7.5.5.4.1-5: Void

Table A.7.5.5.4.1-6: Void

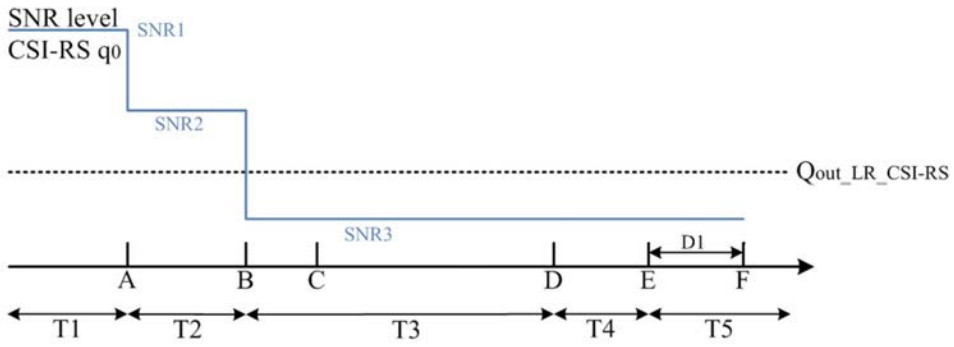

Figure A.7.5.5.4.1-1: SNR variation for CSI-RS-based beam failure detection and link recovery testing in DRX mode

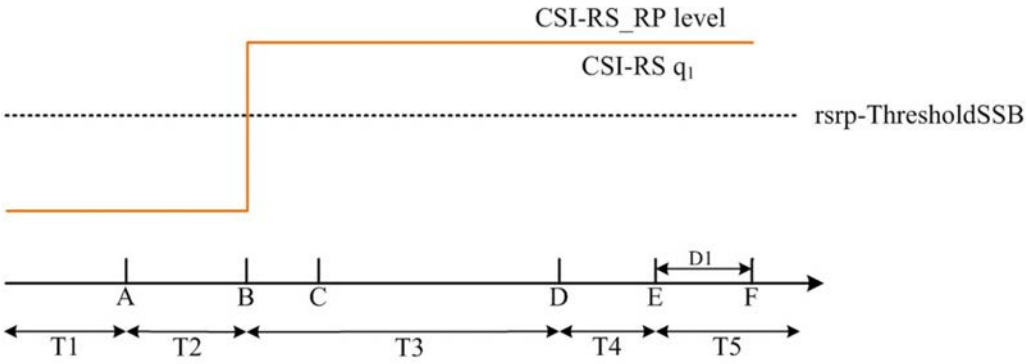

Figure A.7.5.5.4.1-2: CSI-RS_RP level variation for CSI-RS based beam failure detection and link recovery testing in DRX mode

A.7.5.5.4.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiat link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 260+10 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.5.5 Scheduling availability restriction during Beam Failure Detection and Link Recovery for FR2 PCell configured with SSB-based BFD and LR in non-DRX mode

A.7.5.5.5.1 Test Purpose and Environment

The purpose is to test scheduling availability restrictions when the UE is performing beam failure detection or when the UE is performing L1-RSRP measurement for candidate beam detection, when no DRX is used. This test will verify the scheduling availability restriction requirements in clause 8.5.7 and 8.5.8.

The test parameters are given in Tables A.7.5.5.5.1-1, A.7.5.5.5.1-2 and A.7.5.5.5.1-3 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.7.5.5.5.1-1 shows the variation of the downlink SNR of the SSB in set q_0 in the active cell to emulate SSB based beam failure. Figure A.7.5.5.5.1-2 shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. This test will focus on the scheduling availability during beam failure detection) and candidate beam detection. In the test, DRX configuration is not enabled. Test is to test the scheduling availability restriction of

UE performing beam failure detection and candidate beam detection when SSB RS configured for Beam failure detection and candidate beam detection. During the test the UE is scheduled to transmit continuously in UL.

Table A.7.5.5.5.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
2	NR 240 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.7.5.5.5.1-2: General test parameters for FR2 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Test Config.	Unit	Value	Comment
				Test 1	
Active PCell		1-2		Cell 1	
RF Channel Number		1-2		1	
Duplex mode		1-2		TDD	
TDD Configuration		1-2		TDDConf.3.1	
$BW_{channel}$		1-2		100: $N_{RB,c}$ = 66	
Data RBs allocated		1-2		66	
PDSCH/PDCCH subcarrier spacing		1-2	kHz	120	
DL initial BWP configuration		1-2		DLBWP.0.1	
DL dedicated BWP configuration		1-2		DLBWP.1.1	
UL initial BWP configuration		1-2		ULBWP.0.1	
UL dedicated BWP configuration		1-2		ULBWP.1.1	
PDSCH Reference Channel		1		SR.3.2 TDD	
		2		SR.3.3 TDD	
RMSI CORESET Reference Channel		1		CR.3.1 TDD	
		2		CR.3.2 TDD	
Dedicated CORESET Reference Channel		1		CCR.3.1 TDD	
		2		CCR.3.7 TDD	
OCNG parameters		1-2		OP.1	
CP length		1-2		Normal	
PDSCH/PDCCH TCI state		1-2		TCI.State.0	
CSI-RS for tracking		1-2		TRS.2.1 TDD	
SSB Configuration		1		SSB.1 FR2	
		2		SSB.2 FR2	
SMTC Configuration		1-2		SMTC.1	
PRACH Configuration		1-2		FR2 PRACH configuration 2	A.3.8.3.2
DRX configuration		1-2		OFF	
SSB index assigned as BFD RS (q_0)		1-2		0	
SSB index assigned as CBD RS (q_1)		1-2		1	
Beam failure detection transmission parameters	DCI format	1-2		1-0	
	Number of Control OFDM symbols	1-2		2	
	Aggregation level	1-2	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1-2	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1-2	dB	0	
	DMRS precoder granularity	1-2		REG bundle size	
	REG bundle size	1-2		6	

Gap pattern ID	1-2		N/A	
rlmInSyncOutOfSyncThreshold	1-2		absent	Value 0 is applied. (Table 8.1.1-1).
rsrp-ThresholdSSB	1	dBm/SCS	-95	Threshold used for $Q_{in_LR_SSB}$
	2		-92	
powerControlOffsetSS	1-2		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount	1-2		n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer	1-2		pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting	1-2		CSI-RS.3.1 TDD	
reportConfigType	1-2		periodic	
reportQuantity	1-2		cri-RI-PMI-CQI	
CSI reporting periodicity	1-2	slot	40	
CSI reporting offset	1-2	slot	4	
T310	1-2	ms	1000	
N310	1-2		2	
T1	1-2	s	1	The UE shall be fully synchronized to cell 1 during T1
T2	1-2	s	2.6	
T3	1-2	s	1.64	
T4	1-2	s	0	
T5	1-2	s	1.01	
D1	1-2	s	0.97	
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.7.5.5.5.1-3: Cell specific test parameters for FR2 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
AoA Setup			Setup1 defined in A.3.15.1				
Assumption for UE beams Note 10			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q_0	Config 1-2	dB	5 Note 11	-3 Note 11	-12	-12	-12
SNR_SSB of set q_1	Config 1-2	dB	0.2	0.2	20.2	20.2	20.2
SSB_RP of set q_1	Config 1	dBm/SCS	-104.5	-104.5	-84.5	-84.5	-84.5
	Config 2		-101.5	-101.5	-81.5	-81.5	-81.5
N_{oc}	Config 1-2	dBm/120 kHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz				

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	Void
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.7.5.5.5.1-1.
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.
Note 10:	Information about types of UE beam given in B.2.1.3 and does not limit UE implementation or test system implementation
Note 11:	This value allows up to 1dB degradation from applied SNR to UE baseband.

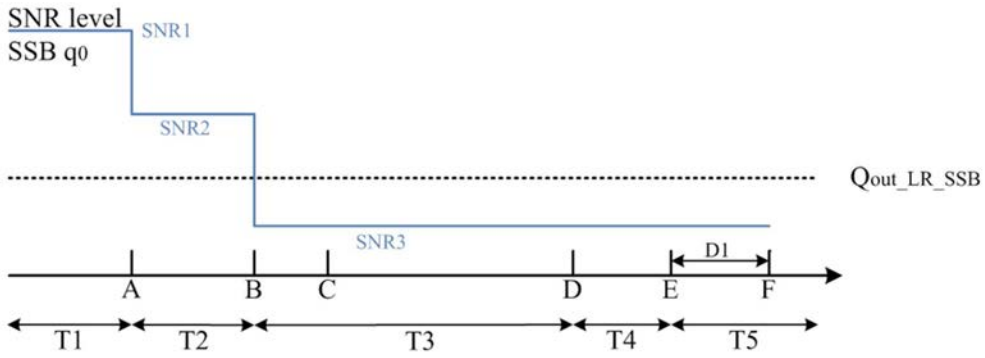

Figure A.7.5.5.5.1-1: SNR variation for SSB-based beam failure detection and link recovery testing in non-DRX mode

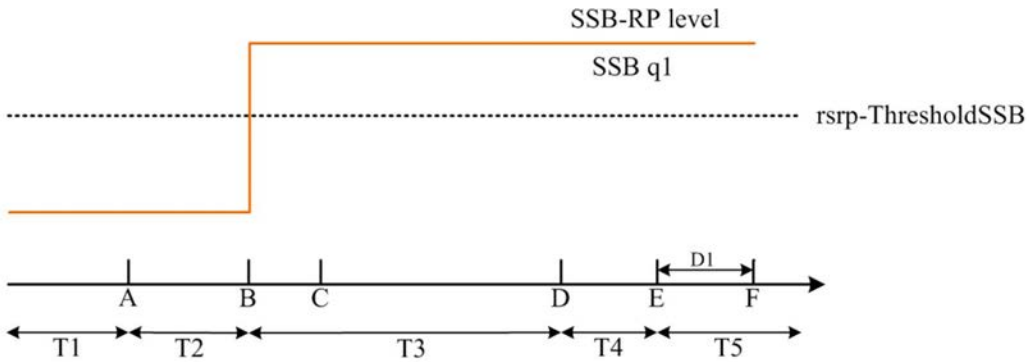

Figure A.7.5.5.5.1-2: SSB_RP level variation for SSB-based beam failure detection and link recovery testing in non-DRX mode

A.7.5.5.5.2 Test Requirements

The UE behaviour during time duration T3 follows the requirements defined in clause 8.5.7.3:

- The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on BFD-RS symbols to be measured for beam failure detection.

The UE behaviour during time durations T4 and T5 follows the requirements defined in clause 8.5.8.3:

- The UE is not expected to transmit PUCCH/PUSCH or receive PDCCH/PDSCH on reference symbols to be measured for candidate beam detection.

A.7.5.5.6 Beam Failure Detection and Link Recovery Test for FR2 SCell configured with CSI-RS-based BFD and LR in non-DRX mode

A.7.5.5.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for an active SCell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the SCell with *schedulingRequestID-BFR-SCell-r16* configuration, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR2 SCell requirements in clause 8.5.

The test parameters are given in Tables A.7.5.5.6.1-1, A.7.5.5.6.1-2 and A.7.5.5.6.1-3. There are two cells, cell 1 is the active PCell and cell 2 is the active SCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.7.5.5.6.1-1 shows the variation of the downlink SNR of the CSI-RS in set q_0 in the active SCell to emulate CSI-RS based beam failure. Figure A.7.5.5.6.1-2 shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled.

Table A.7.5.5.6.1-1: Supported test configurations for FR2 PCell and SCell

Configuration	Description
1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Table A.7.5.5.6.1-2: General test parameters for FR2 SCell for beam failure detection and link recovery testing in non-DRX mode

Parameter	Test Config.	Unit	Value	Comment
			Test 1	
Active PCell	1		Cell 1	
RF Channel Number for PCell	1		1	
Active SCell	1		Cell 2	
RF Channel Number for SCell	1		2	
Duplex mode	1		TDD	
TDD Configuration	1		TDDConf.3.1	
$BW_{channel}$	1	MHz	100: $N_{RB,c}$ = 66	
Data RBs allocated	1		66	
PDSCH/PDCCH subcarrier spacing	1	kHz	120	
DL initial BWP configuration	1		DLBWP.0.1	
DL dedicated BWP configuration	1		DLBWP.1.1	
UL initial BWP configuration	1		ULBWP.0.1	
UL dedicated BWP configuration	1		ULBWP.1.1	

PDSCH Reference Channel		1		SR.3.2 TDD	
RMSI CORESET Reference Channel		1		CR.3.1 TDD	A.3.1.2
Dedicated CORESET Reference Channel		1		CCR.3.1 TDD	
OCNG parameters		1		OP.1	A.3.2.1
CP length		1		Normal	
PDSCH/PDCCH TCI state		1		TCI.State.0	
CSI-RS for tracking		1		TRS.2.1 TDD	
SSB Configuration		1		SSB.3 FR2	A.3.10
SMTC Configuration		1		SMTC.3	A.3.11
PRACH Configuration		1		FR2 PRACH configuration 4	Table A.3.8.3.4-1
DRX configuration		1		OFF	
CSI-RS configuration for BFD/CBD on SCell		1		CSI-RS.3.2 TDD	A.3.14.2
CSI-RS index assigned as BFD RS (q_0)		1		0	
CSI-RS index assigned as CBD RS (q_1)		1		1	
CSI-RS configuration for RLM on PCell		1		CSI-RS.3.2 TDD	A.3.14.2
Beam failure detection transmission parameters	DCI format	1		1-0	
	Number of Control OFDM symbols	1		2	
	Aggregation level	1	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1	dB	0	
	DMRS precoder granularity	1		REG bundle size	
	REG bundle size	1		6	
Gap pattern ID		1		N/A	
schedulingRequestID-BFR-SCell-r16		1		Configured	
Periodicity of PUCCH for SR configuration for BFR on SCell		1	slot	40	5ms
Offset of PUCCH for SR configuration for BFR on SCell		1	slot	4	
PUCCH parameters for SR configuration for BFR on SCell		1		Table 8.3.3.1.2-1 in [13]	
rlmInSyncOutOfSyncThreshold		1		absent	Value 0 is applied. (Table 8.1.1-1).
rsrp-ThresholdSSB		1	dBm/SCS	-95	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS		1		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount		1		n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer		1		pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting		1		CSI-RS.3.1 TDD	A.3.14.2
reportConfigType		1		periodic	
reportQuantity		1		cri-RI-PMI-CQI	
CSI reporting periodicity		1	slot	40	
CSI reporting offset		1	slot	4	
T310		1	ms	1000	
N310		1		2	

T1	1	s	1	The UE shall be fully synchronized to cell 1 during T1
T2	1	s	1.17	
T3	1	s	0.9	
T4	1	s	0	
T5	1	s	0.31	
D1	1	s	0.27	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.7.5.5.6.1-3: Cell specific test parameters for FR2 SCell for beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Cell 1	Cell2 Test 1				
			T1 to T5	T1	T2	T3	T4	T5
AoA setup			Setup 1 defined in A.3.15	Setup 1 defined in A.3.15				
Assumptpion for UE beams Note 10			Rough	Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB						
EPRE ratio of PBCH DMRS to SSS		dB						
EPRE ratio of PBCH to PBCH DMRS		dB						
EPRE ratio of PSS to SSS		dB						
EPRE ratio of PDSCH DMRS to SSS		dB						
EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
SNR_CSI-RS of set q_0	Config 1	dB	5	5	-3	-12	-12	-12
SNR_CSI-RS of set q_1	Config 1	dB	0.2	0.2	0.2	20.2	20.2	20.2
CSI-RS_RP of set q_1	Config 1	dBm/SCS kHz	-104.5	-104.5	-104.5	-84.5	-84.5	-84.5
N_{oc}	Config 1	dBm/ 120kHz	-104.7	-104.7				
Propagation condition			TDL-A 30ns 75Hz	TDL-A 30ns 75Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Void
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.7.5.5.6.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.
Note 10: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.

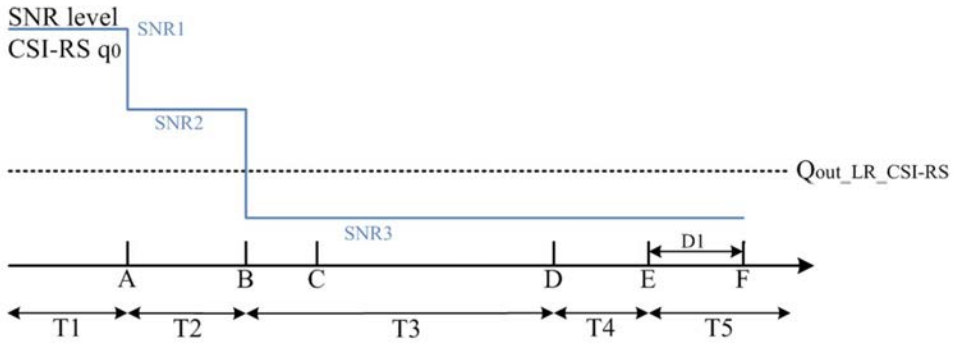

Figure A.7.5.5.6.1-1: SNR and L1-RSRP variation for beam failure detection and link recovery testing for SCell in non-DRX mode

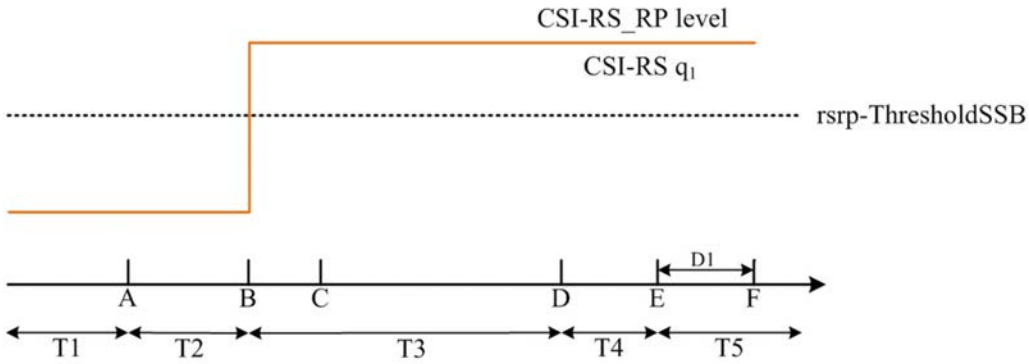

Figure A.7.5.5.6.1-2: CSI-RS_RP level variation for CSI-RS based beam failure detection and link recovery testing for SCell in non-DRX mode

A.7.5.5.6.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 in A.7.5.5.6.1 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initial link recovery. During T4 and T5 the UE measures and evaluates beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 260+10 ms after the start of T5, the UE shall transmit PUCCH with LRR, followed by BFR MAC CE containing a beam associated with the candidate beam set q_1. The UE shall not transmit PUCCH with an LRR with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.5.7 Beam Failure Detection and Link Recovery Test for FR2 SCell configured with CSI-RS-based BFD and LR in DRX mode

A.7.5.5.7.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for an active SCell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the SCell with *schedulingRequestID-BFR-SCell-r16* configuration, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR2 SCell requirements in clause 8.5.

The test parameters are given in Tables A.7.5.5.7.1-1, A.7.5.5.7.1-2 and A.7.5.5.7.1-3. There are two cell, cell 1 is the active PCell and cell 2 is the active SCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.7.5.5.7.1-1 shows the variation of the downlink SNR of the CSI-RS in set q_0 in the active SCell to emulate CSI-RS based beam failure. Figure A.7.5.5.7.1-2 shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.7.5.5.7.1-1: Supported test configurations for FR2 PCell and SCell

Configuration	Description
1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Table A.7.5.5.7.1-2: General test parameters for FR2 SCell for beam failure detection and link recovery testing in DRX mode

Parameter	Test Config.	Unit	Value	Comment
			Test 1	
Active PCell	1		Cell 1	
RF Channel Number for PCell	1		1	
Active SCell	1		Cell 2	
RF Channel Number for SCell	1		2	
Duplex mode	1		TDD	
TDD Configuration	1		TDDConf.3.1	
$BW_{channel}$	1	MHz	100: $N_{RB,c}$ = 66	
Data RBs allocated	1		66	
PDSCH/PDCCH subcarrier spacing	1	kHz	120	
DL initial BWP configuration	1		DLBWP.0.1	
DL dedicated BWP configuration	1		DLBWP.1.1	
UL initial BWP configuration	1		ULBWP.0.1	
UL dedicated BWP configuration	1		ULBWP.1.1	
PDSCH Reference Channel	1		SR.3.2 TDD	
RMSI CORESET Reference Channel	1		CR.3.1 TDD	A.3.1.2
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD	
OCNG parameters	1		OP.1	A.3.2.1
CP length	1		Normal	
PDSCH/PDCCH TCI state	1		TCI.State.0	
CSI-RS for tracking	1		TRS.2.1 TDD	
SSB Configuration	1		SSB.3 FR2	A.3.10
SMTC Configuration	1		SMTC.3	A.3.11

PRACH Configuration		1		FR2 PRACH configuration 4	Table A.3.8.3.4-1
DRX configuration		1		DRX.3	A.3.3.3
CSI-RS configuration for BFD/CBD on SCell		1		CSI-RS.3.2 TDD	A.3.14.2
CSI-RS index assigned as BFD RS (q_0)		1		0	
CSI-RS index assigned as CBD RS (q_1)		1		1	
CSI-RS configuration for RLM on PCell		1		CSI-RS.3.2 TDD	A.3.14.2
Beam failure detection transmission parameters	DCI format	1		1-0	
	Number of Control OFDM symbols	1		2	
	Aggregation level	1	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1	dB	0	
	DMRS precoder granularity	1		REG bundle size	
	REG bundle size	1		6	
Gap pattern ID		1		N/A	
schedulingRequestID-BFR-SCell-r16		1		Configured	
Periodicity of PUCCH for SR configuration for BFR on SCell		1	slot	40	5ms
Offset of PUCCH for SR configuration for BFR on SCell		1	slot	4	
PUCCH parameters for SR configuration for BFR on SCell		1		Table 8.3.3.1.2-1 in [13]	
rlmInSyncOutOfSyncThreshold		1		absent	Value 0 is applied. (Table 8.1.1-1).
rsrp-ThresholdSSB		1	dBm/SCS	-95	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS		1		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount		1		n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer		1		pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting		1		CSI-RS.3.1 TDD	A.3.14.2
reportConfigType		1		periodic	
reportQuantity		1		cri-RI-PMI-CQI	
CSI reporting periodicity		1	slot	40	
CSI reporting offset		1	slot	4	
T310		1	ms	1000	
N310		1		2	
T1		1	s	1	The UE shall be fully synchronized to cell 1 during T1
T2		1	s	5.43	
T3		1	s	5.16	
T4		1	s	0	
T5		1	s	0.31	
D1		1	s	0.27	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.					

Table A.7.5.5.7.1-3: Cell specific test parameters for FR2 SCell for beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Cell1	Test 1 Cell2				
			T1 to T5	T1	T2	T3	T4	T5
AoA setup			Setup 1 defined in A.3.15	Setup 1 defined in A.3.15				
Assumption for UE beams Note 10			Rough	Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB						
EPRE ratio of PBCH DMRS to SSS		dB						
EPRE ratio of PBCH to PBCH DMRS		dB						
EPRE ratio of PSS to SSS		dB						
EPRE ratio of PDSCH DMRS to SSS		dB						
EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
SNR_CSI-RS of set q_0	Config 1	dB	5	5	-3	-12	-12	-12
SNR_CSI-RS of set q_1	Config 1	dB	0.2	0.2	0.2	20.2	20.2	20.2
CSI-RS_RP of set q_1	Config 1	dBm/ SCS kHz	-104.5	-104.5	-104.5	-84.5	-84.5	-84.5
N_{oc}	Config 1	dBm/120 kHz	-104.7	-104.7				
Propagation condition			TDL-A 30ns 75Hz	TDL-A 30ns 75Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Void
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.7.5.5.7.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.
Note 10: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.

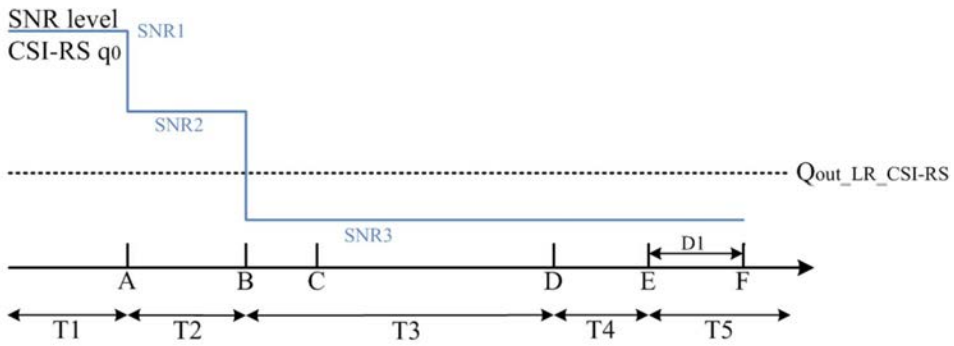

Figure A.7.5.5.7.1-1: SNR variation for beam failure detection and link recovery testing for SCell in DRX mode

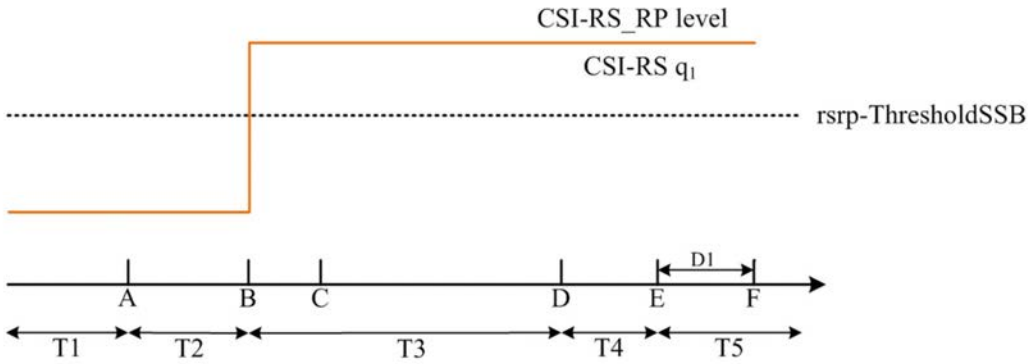

Figure A.7.5.5.7.1-2: CSI-RS_RP level variation for CSI-RS based beam failure detection and link recovery testing for SCell in DRX mode

A.7.5.5.7.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 in A.7.5.5.7.1 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initial link recovery. During T4 and T5 the UE measures and evaluates beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 260+10 ms after the start of T5, the UE shall transmit PUCCH with LRR, followed by BFR MAC CE containing a beam associated with the candidate beam set q_1. The UE shall not transmit PUCCH with an LRR with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.5.8 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with CSI-RS-based BFD and LR in DRX mode for UE fulfilling relaxed measurement criterion

A.7.5.5.8.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct CSI-RS-based link recovery based on beam candicate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR2 serving cell requirements in clause 8.5.3.4 for UE fulfilling good serving cell quality relaxed measurement criteria. The test parameters are given in Tables A.7.5.5.8.1-1, A.7.5.5.8.1-2, A.7.5.5.8.1-3, and A.7.5.5.8.1-4 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.7.5.5.8.1-1 shows the variation of the downlink SNR of the CSI-RS in set q_0 in the active cell to emulate CSI-RS based beam failure. Figure A.7.5.5.8.1-1 additionally shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

As specified in the Test Purpose, the UE is configured with the relaxed measurement criterion for both low mobility and good serving cell quality defined in clause 5.7.13.2 in TS 38.331 [2]. At the beginning of T1, the UE has fulfilled the good serving cell quality relaxation measurements criterion and is performing relaxed measurements for beam failure detection.

- *goodServingCellEvaluationBFD* [2] criterion is configured according to the parameters listed in Table A.7.5.5.8.1-2;
- *lowMobilityEvalutationcConnected* [2] criterion is configured according to the parameters listed in Table A.7.5.5.8.1-2.

Table A.7.5.5.8.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Table A.7.5.5.8.1-2: General test parameters for FR2 PCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

Parameter	Test Config.	Unit	Value	Comment
			Test 1	
Active PCell	1		Cell 1	
RF Channel Number	1		1	
Duplex mode	1		TDD	
TDD Configuration	1		TDDConf.3.1	
$BW_{channel}$	1		100: $N_{RB,c}$ = 66	
Data RBs allocated	1		66	
PDSCH/PDCCH subcarrier spacing	1	kHz	120	
DL initial BWP configuration	1		DLBWP.0.1	
DL dedicated BWP configuration	1		DLBWP.1.1	
UL initial BWP configuration	1		ULBWP.0.1	
UL dedicated BWP configuration	1		ULBWP.1.1	
PDSCH Reference Channel	1		SR.3.2 TDD	

RMSI CORESET Reference Channel		1		CR.3.1 TDD	
Dedicated CORESET Reference Channel		1		CCR.3.1 TDD	
OCNG parameters		1		OP.1	
CP length		1		Normal	
PDSCH/PDCCH TCI state		1		TCI.State.0	
CSI-RS for tracking		1		TRS.2.1 TDD	
SSB Configuration		1		SSB.1 FR2	
SMTC Configuration		1		SMTC.3	
PRACH Configuration		1		FR2 PRACH configuration 4	A.3.8.3.4
DRX configuration		1		DRX.3	A.3.3.3
CSI-RS configuration for BFD/CBD/RLM		1		CSI-RS.3.2 TDD	A.3.14.2
CSI-RS index assigned as BFD RS (q_0)		1		0	
CSI-RS index assigned as CBD RS (q_1)		1		1	
CSI-RS index assigned as RLM RS		1		0,1	
Beam failure detection transmission parameters	DCI format	1		1-0	
	Number of Control OFDM symbols	1		2	
	Aggregation level	1	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1	dB	0	
	DMRS precoder granularity	1		REG bundle size	
	REG bundle size	1		6	
Gap pattern ID		1		N/A	
rlmInSyncOutOfSyncThreshold		1		absent	Value 0 is applied. (Table 8.1.1-1).
rsrp-ThresholdSSB		1	dBm/SCS	-95	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS		1		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount		1		n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer		1		pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting		1		CSI-RS.3.1 TDD	A.3.14.2
reportConfigType		1		periodic	
reportQuantity		1		cri-RI-PMI-CQI	
CSI reporting periodicity		1	slot	40	
CSI reporting offset		1	slot	4	
T310		1	ms	1000	
N310		1		1	
offset		4	dB	N/A	*offset* in goodServingCellEvaluationBFD

s-SearchDeltaP-Connected	1	dB	6	Used to determine if low mobility relaxed criterion is fulfilled
t-SearchDeltaP-Connected	1	s	5	Used to determine if low mobility relaxed criterion is fulfilled
T1	1	s	[6]	The UE shall be fully synchronized to cell 1 during T1. UE is performing relaxed measurements for BFD.
T2	1	s	[3.6]	
T3	1	s	[9.64]	
T4	1	s	0	
T5	1	s	0.31	
D1	1	s	0.27	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.7.5.5.8.1-3: Cell specific test parameters for FR2 PCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
AoA setup			Setup 1 defined in A.3.15				
Assumption for UE beams Note 10			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set q_0	Config 1	dB	5 Note 11	5 Note 11	-12	-12	-12
SNR_CSI-RS of set q_1	Config 1	dB	0.2	0.2	20.2	20.2	20.2
CSI-RS_RP of set q_1	Config 1	dBm/SCS	-104.5	-104.5	-84.5	-84.5	-84.5
N_{oc}	Config 1	dBm/120 KHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz				

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	Void
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.7.5.5.4.1-1.
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.
Note 10:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 11:	This value allows up to 1dB degradation from applied SNR to UE baseband

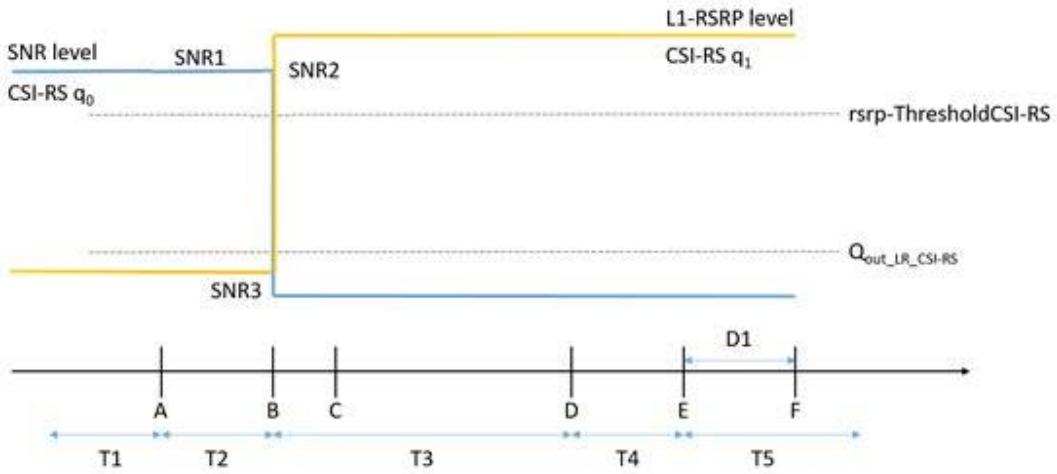

Figure A.7.5.5.8.1-1: SNR and L1-RSRP variation for CSI-RS-based beam failure detection and link recovery testing in DRX mode

A.7.5.5.8.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiat link recovery, and exit from relaxed measurements. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 260+10 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.5.9 TRP specific Beam Failure Detection and Link Recovery Test for FR2 SCell configured with CSI-RS-based BFD and LR in DRX mode

A.7.5.5.9.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects TRP specific CSI-RS-based beam failure and link recovery in the sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$ for TRP1 when DRX is used for an FR2 active Scell requirements in clause 8.18.

The test parameters are given in Tables A.7.5.5.9.1-1, A.7.5.5.9.1-2 and A.7.5.5.9.1-3. There are two cell, cell 1 is the active PCell and cell 2 is the active SCell, in the test. SCell is configured with two TRPs. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.7.5.5.9.1-1shows the variation of the downlink SNR of the CSI-RS in set $\bar{q}_{0,0}$ and $\bar{q}_{1,0}$ in the active SCell for TRP1 and TRP2 respectively. Figure A.7.5.5.9.11-1additionally shows the variation of the downlink L1-RSRP of the CSI-RS in $\bar{q}_{0,1}$ for TPR1. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 2 ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.7.5.5.9.1-1: Supported test configurations for FR2 PCell and SCell

Configuration	Description
1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Table A.7.5.5.9.1-2: General test parameters for FR2 SCell for beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Value	Comment
			Test 1	
Active PCell			Cell 1	
RF Channel Number for PCell			1	
Active SCell			Cell 2	
RF Channel Number for SCell			2	
Duplex mode	Config 1		TDD	
BW channel	Config 1		100: $N_{RB,c}$ = 66	
DL initial BWP configuration	Config 1		DLBWP.0.1	
DL dedicated BWP configuration	Config 1		DLBWP.1.1	
UL initial BWP configuration	Config 1		ULBWP.0.1	
UL dedicated BWP configuration	Config 1		ULBWP.1.1	
TDD Configuration	Config 1		TDDConf.3.1	
CORESET Reference Channel	Config 1		CR.3.1 TDD	A.3.1.2
SSB Configuration	Config 1		SSB.3 FR2	A.3.11
SMTC Configuration	Config 1		SMTC.3	A.3.10
PDSCH/PDCCH subcarrier spacing	Config 1		120 KHz	
PRACH Configuration	Config 1		Table A.3.8.3.1-1	

CSI-RS configuration for TRP0	Config 1		CSI-RS.3.2 TDD	A.3.14.2
CSI-RS configuration for TRP1	Config 1		CSI-RS.3.6 TDD	A.3.14.2
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.3.1 TDD	A.3.14.2
TRS configuration	Config 1		TRS.2.1 TDD	
TCI configuration	Config 1		CSI-RS.Config.0	
OCNG parameters			OP.1	
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
OCNG parameters			OP.1	A.3.2.1
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			DRX.3	
Gap pattern ID			N.A.	
schedulingRequestID-BFR-SCell-r16			Configured	
Periodicity of PUCCH for SR configuration for BFR on SCell		Slot	40	5ms
Offset of PUCCH for SR configuration for BFR on SCell		Slot	5	
PUCCH parameters for SR configuration for BFR on SCell			Table 8.3.3.1.2-1 in [13]	
csi-RS-Index assigned as BFD RS in set (q00)			0	
csi-RS-Index assigned as BFD RS in set (q01)			2	
CSI-RS index assigned as RLM RS			0, 1	
CSI-RS Index assigned as CBD RS in set (q10)			1	
CSI-RS Index assigned as CBD RS in set (q11)			3	
SSB index assigned as RLM RS			0, 1	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdBFR	Config 1	dBm/SCS	-95	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS

beamFailureInstanceMaxCount		n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer		pbfd4	see TS 38.321 [7], clause 5.17
T310 Timer	ms	1000	
N310		2	
T1	s	1	During this time the the UE shall be fully synchronized to cell 1
T2	s	10.81	
T3	s	10.28	
T4	s	0	
T5	s	0.57	
D1	s	0.53	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.7.5.5.9.1-3: Cell specific test parameters for FR2 SCell for beam failure detection and link recovery testing in DRX mode

Parameter	Unit	Cell1	Cell2				
		T1 to T5	T1	T2	T3	T4	T5
AoA setup		Setup 3 as specified in clause A.3.15 Note 11					
Assumption for UE beams Note 10		Rough	Rough				
EPRE ratio of PDCCH DMRS to SSS	dB	0	0				
EPRE ratio of PDCCH to PDCCH DMRS	dB						
EPRE ratio of PBCH DMRS to SSS	dB						
EPRE ratio of PBCH to PBCH DMRS	dB						
EPRE ratio of PSS to SSS	dB						
EPRE ratio of PDSCH DMRS to SSS	dB						
EPRE ratio of PDSCH to PDSCH DMRS	dB						
EPRE ratio of OCNG DMRS to SSS	dB						
EPRE ratio of OCNG to OCNG DMRS	dB						
SNR_CSI-RS of set $q_{0,0}$	dB	5	5	-3	-12	-12	-12
SNR_CSI-RS of set $q_{1,0}$	dB	5	5	5	5	5	5
SNR_CSI-RS of set $q_{0,1}$	dB	0.2	0.2	0.2	20.2	20.2	20.2
CSI-RS_RP of set $q_{0,1}$	dBm/ SCS kHz	-104.5	-104.5	-104.5	-84.5	-84.5	-84.5
N_{oc}	dBm/120 kHz	-104.7	-104.7				
Propagation condition		TDL-A 30ns 75Hz	TDL-A 30ns 75Hz				

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	Void
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.7.5.5.7.1-1.
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.
Note 10:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 11:	AoA1 for PCell and TRP1 of SCell , AoA2 for TRP2 of SCell

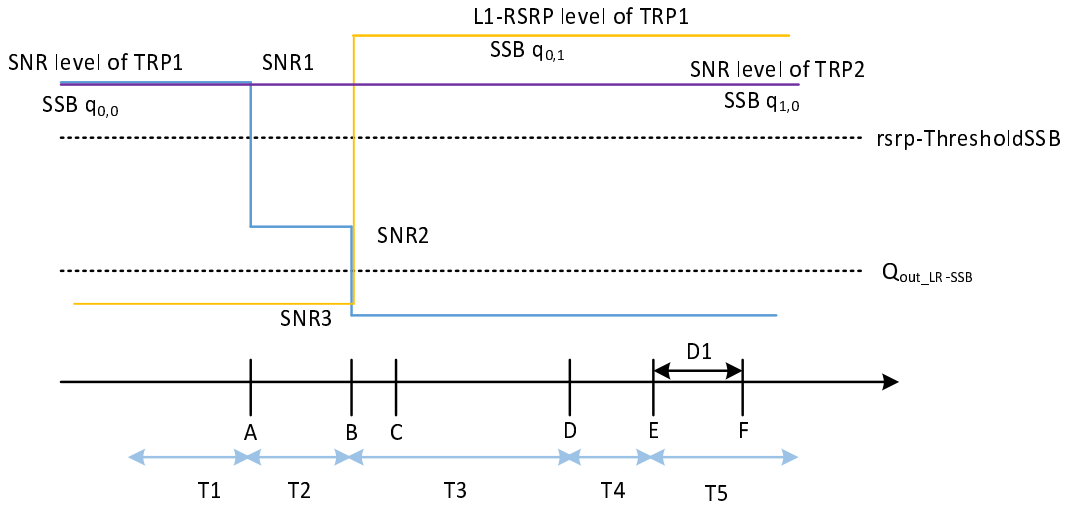

Figure A.7.5.5.9.1-1: SNR and L1-RSRP variation for beam failure detection and link recovery testing for SCell in DRX mode

A.7.5.5.9.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 in A.7.5.5.9.1 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1 for TRP1 and TRP2.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 2 TRP1 and TRP2 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3, T4, T5, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1 for TRP2.

During T3 the UE shall detect beam failure and initiate link recovery for TRP1. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set $q_{0,1}$.

No later than time point F occurring no later than D1 = [520]+10 ms after the start of T5, the UE shall transmit PUCCH with LRR, followed by BFR MAC CE containing a beam associated with the candidate beam set $q_{0,1}$. The UE shall not transmit PUCCH with an LRR with the candidate beam set $q_{0,1}$ earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.5.10 TRP specific Beam Failure Detection and Link Recovery Test for FR2 PCell configured with SSB-based BFD and LR in non-DRX mode

A.7.5.5.10.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects TRP specific SSB-based beam failure and link recovery in the sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$ for TRP1 with *schedulingRequestID-BFR-r17* configured, when no DRX is used for an FR2 serving cell requirements in clause 8.18.

The test parameters are given in Tables A.7.5.5.10.1-1, A.7.5.5.10.1-2, A.7.5.5.10.1-3 and A.7.5.5.10.1-4 below. There is one active serving cell configured with two TRPs in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.7.5.5.10.1-1 shows the variation of the downlink SNR of the SSB in set $\bar{q}_{0,0}$ and $\bar{q}_{1,0}$ for TRP1 and TRP2 respectively. Figure A.7.5.5.10.1-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set $\bar{q}_{0,1}$ for TPR1.

Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test 1.

Table A.7.5.5.10.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth
2	TDD duplex mode, 240 kHz SSB SCS, 100 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR2	

Table A.7.5.5.10.1-2: General test parameters for FR2 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Value	Comment
			Test 1	Same configuration for both TRP whereever applicbale
Active PCell			Cell 1	
RF Channel Number for PCell			1	
Duplex mode	Config 1,2		TDD	
TDD Configuration	Config 1,2		TDDConf.3.1	
BW channel	Config 1,2		100: $N_{RB,c}$ = 66	
Data RBs allocated	Config 1,2		66	
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	120	
DL initial BWP configuration	Config 1,2		DLBWP.0.1	
DL dedicated BWP configuration	Config 1,2		DLBWP.1.1	
UL initial BWP configuration	Config 1,2		ULBWP.0.1	

UL dedicated BWP configuration	Config 1,2		ULBWP.1.1	
PDSCH Reference Channel	Config 1		SR.3.2 TDD	
	Config 2		SR.3.3 TDD	
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD	
	Config 2		CR.3.2 TDD	
Dedicated CORESET Reference Channel	Config 1		CCR.3.1 TDD	A.3.1.2
	Config 2		CCR.3.7 TDD	
OCNG parameters	Config 1,2		OP.1	
CP length	Config 1,2		Normal	
PDSCH/PDCCH TCI state	Config 1,2		TCI.State.0	
CSI-RS for tracking	Config 1,2		TRS.2.1 TDD	
CSI-RS configuration for CSI reporting	Config 1,2		CSI-RS.3.1 TDD	
reportConfigType	Config 1,2		periodic	
reportQuantity	Config 1,2		cri-RI-PMI-CQI	
CSI reporting periodicity	Config 1,2	slot	40	
CSI reporting offset	Config 1,2	slot	4	
SSB Configuration for TRP0	Config 1		SSB.1 FR2	
	Config 2		SSB.2 FR2	
SSB Configuration for TRP1	Config 1		SSB.9 FR2	
	Config 2		SSB.10 FR2	
SMTC Configuration	Config 1,2		SMTC.3	A.3.10
PRACH Configuration	Config 1,2		FR2 PRACH configuration 2	A.3.8.3.2
DRX configuration	Config 1,2		OFF	
SSB Index assigned as BFD RS (q0,0)	Config 1,2		0	
SSB Index assigned as CBD RS (q1,0)	Config 1,2		1	
SSB Index assigned as BFD RS (q0,1)	Config 1,2		2	
SSB Index assigned as CBD RS (q1,1)	Config 1,2		3	
SSB Index assigned as RLM RS	Config 1,2		0,1,2,3	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
Gap pattern ID			gp0	
gapOffset			0	
schedulingRequestID-BFR- r17			Configured	
Periodicity of PUCCH for SR configuration for BFR on PCell		slot	40	5ms

rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdBFR	Config 1	dBm/SCS	-95	Threshold used for $Q_{in_LR_SSB}$
	Config 2		-92	
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer			pbfd4	see TS 38.321 [7], clause 5.17
T310 Timer		ms	1000	
N310			2	
T1		s	1	During this time the the UE shall be fully synchronized to cell 1
T2		s	2.61	
T3		s	1.64	
T4		s	0	
T5		s	1.01	
D1		s	0.97	
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.7.5.5.10.13: Cell specific test parameters for FR2 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
AoA setup			Setup 3 as specified in clause A.3.15 Note 12				
Assumption for UE beams Note 10			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set $q_{0,0}$	Config 1-2	dB	5 Note 11	-3 Note 11	-12	-12	-12
SNR_SSB of set $q_{1,0}$	Config 1-2	dB	5 Note 11	5 Note 11	5 Note 11	5 Note 11	5 Note 11
SNR_SSB of set $q_{0,1}$	Config 1-2	dB	0.2	0.2	20.2	20.2	20.2
SSB_RP of set $q_{0,1}$	Config 1	dBm/ SCS	-104.5	-104.5	-84.5	-84.5	-84.5
	Config 2		-101.5	-101.5	-81.5	-81.5	-81.5
N_{oc}	Config 1,2	dBm/120 KHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz				

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.7.5.5.1.1-1.
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.
Note 10:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 11:	This value allows up to 1dB degradation from applied SNR to UE baseband
Note 12:	AoA1 for TRP1 and AoA2 for TRP2

Table A.7.5.5.10.1-4: Void

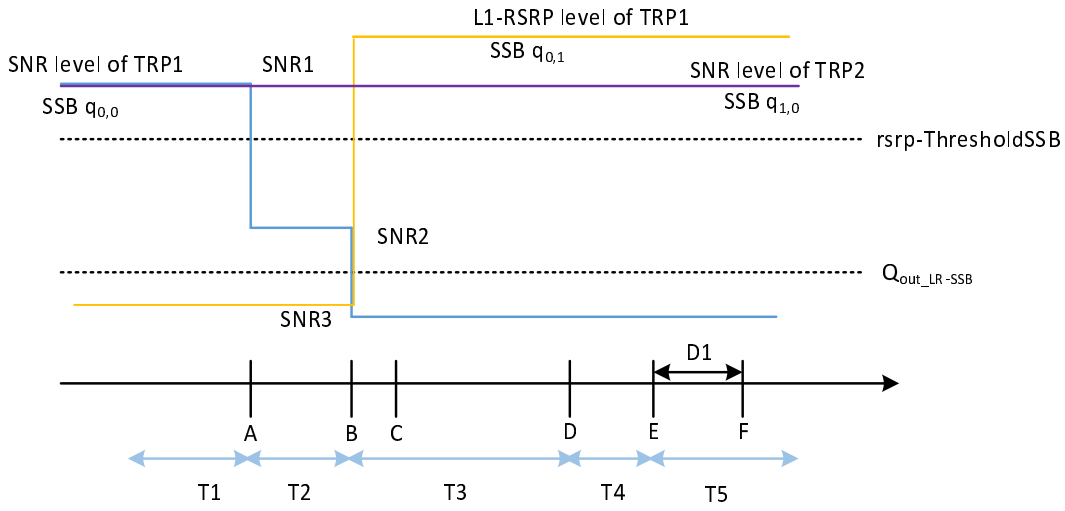

Figure A.7.5.5.10.1-1: SNR and L1-RSRP variation SSB for SSB-based beam failure detection and link recovery testing in non-DRX mode

A.7.5.5.10.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1 for TRP 1 and TRP2.

During the period from time point A to time point B the UE shall transmit uplink signal for TRP 1 and TRP2 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3, T4, T5, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission for TRP 2.

During T3 the UE shall detect beam failure and initiate link recovery for TRP 1. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set $q_{0,1}$.

No later than time point F occurring no later than D1 = 960+10 ms after the start of T5, the UE shall transmit PUCCH with LRR, followed by BFR MAC CE containing a beam associated with the candidate beam set $q_{1,0}$. The UE shall not transmit PUCCH with an LRR with the candidate beam set $q_{1,0}$ earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.5.11 Beam Failure Detection and Link Recovery Test for FR2-2 PCell configured with CSI-RS-based BFD and LR in non-DRX mode

A.7.5.5.11.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct CSI-RS-based link recovery based on beam candicate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR2-2 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.7.5.5.11.1-1, A.7.5.5.11.1-2, and A.7.5.5.11.1-3 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.7.5.5.11.1-1 shows the variation of the downlink SNR of the CSI-RS in set q_0 in the active cell to emulate CSI-RS based beam failure. Figure A.7.5.5.11.1-1 additionally shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled.

Table A.7.5.5.11.1-1: Supported test configurations for FR2-2 PCell

Configuration	Description
1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth
2	TDD duplex mode, 480 kHz SSB SCS, 400 MHz bandwidth
3	TDD duplex mode, 960 kHz SSB SCS, 400 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR2-2	

Table A.7.5.5.11.1-2: General test parameters for FR2-2 PCell for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

Parameter	Test Config.	Unit	Value	Comment
			Test 1	
Active PCell	1,2,3		Cell 1	
RF Channel Number	1,2,3		1	
Duplex mode	1,2,3		TDD	
TDD Configuration	1,2,3		TDDConf.3.1	
$BW_{channel}$	1		100: $N_{RB,c}$ = 66	
	2		400: $N_{RB,c}$ = 66	
	3		400: $N_{RB,c}$ = 33	
Data RBs allocated	1		66	
	2		66	
	3		33	
PDSCH/PDCCH subcarrier spacing	1	kHz	120	

		2	kHz	480	
		3	kHz	960	
DL initial BWP configuration		1,2,3		DLBWP.0.1	
DL dedicated BWP configuration		1,2,3		DLBWP.1.1	
UL initial BWP configuration		1,2,3		ULBWP.0.1	
UL dedicated BWP configuration		1,2,3		ULBWP.1.1	
PDSCH Reference Channel		1,2,3		SR.3.2 TDD	
RMSI CORESET Reference Channel		1,2,3		CR.3.1 TDD	
Dedicated CORESET Reference Channel		1,2,3		CCR.3.1 TDD	
OCNG parameters		1,2,3		OP.1	
CP length		1,2,3		Normal	
PDSCH/PDCCH TCI state		1,2,3		TCI.State.0	
CSI-RS for tracking		1,2,3		TRS.2.1 TDD	
SSB Configuration		1,2,3		SSB.1 FR2	
SMTC Configuration		1,2,3		SMTC.3	
PRACH Configuration		1,2,3		FR2 PRACH configuration 4	A.3.8.3.4
DRX configuration		1,2,3		OFF	
CSI-RS configuration for BFD/CBD/RLM		1,2,3		CSI-RS.3.2 TDD	A.3.14.2
CSI-RS index assigned as BFD RS (q_0)		1,2,3		0	
CSI-RS index assigned as CBD RS (q_1)		1,2,3		1	
CSI-RS index assigned as RLM RS		1,2,3		0,1	
Beam failure detection transmission parameters	DCI format	1,2,3		1-0	
	Number of Control OFDM symbols	1,2,3		2	
	Aggregation level	1,2,3	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1,2,3	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1,2,3	dB	0	
	DMRS precoder granularity	1,2,3		REG bundle size	
	REG bundle size	1,2,3		6	
Gap pattern ID		1,2,3		N/A	
rlmInSyncOutOfSyncThreshold		1,2,3		absent	Value 0 is applied. (Table 8.1.1-1).
rsrp-ThresholdSSB		1,2,3	dBm/SCS	-95	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS		1,2,3		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount		1,2,3		n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer		1,2,3		pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting		1,2,3		CSI-RS.3.1 TDD	A.3.14.2
reportConfigType		1,2,3		periodic	
reportQuantity		1,2,3		cri-RI-PMI-CQI	
CSI reporting periodicity		1,2,3	slot	40	
CSI reporting offset		1,2,3	slot	4	
T310		1,2,3	ms	1000	
N310		1,2,3		2	
T1		1,2,3	s	1	The UE shall be fully synchronized to cell 1 during T1

T2	1,2,3	s	1.17	
T3	1,2,3	s	0.9	
T4	1,2,3	s	0	
T5	1,2,3	s	0.31	
D1	1,2,3	s	0.27	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.7.5.5.11.1-3: Cell specific test parameters for FR2-2 PCell for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
AoA setup			Setup 1 defined in A.3.15				
Assumptpion for UE beams Note 10			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set q_0	Config 1,2,3	dB	5 Note 11	-3 Note 11	-12	-12	-12
SNR_CSI-RS of set q_1	Config 1,2,3	dB	0.2	0.2	20.2	20.2	20.2
CSI-RS_RP of set q_1	Config 1,2,3	dBm/SCS	-104.5	-104.5	-84.5	-84.5	-84.5
N_{oc}	Config 1,2,3	dBm/120 KHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Void
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.7.5.5.11.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.
Note 10: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband

Table A.7.5.5.11.1-4: Void

Table A.7.5.5.11.1-5: Void

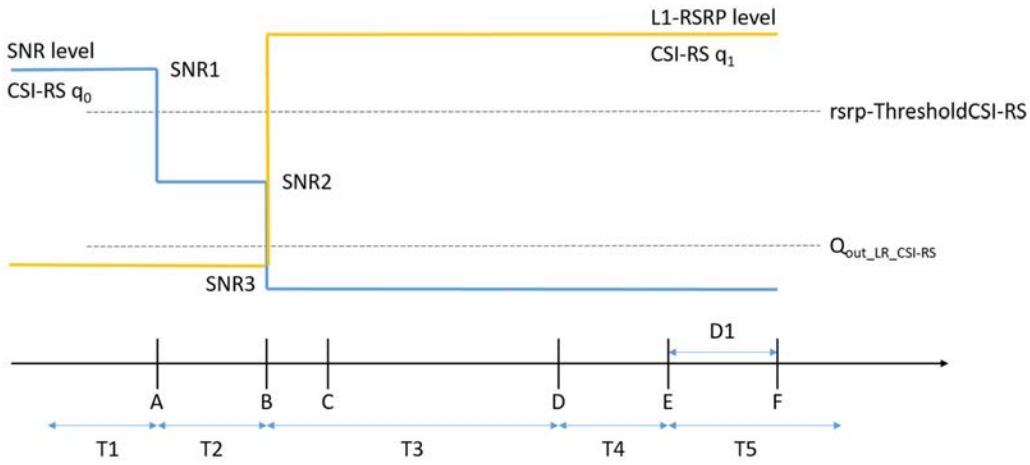

Figure A.7.5.5.11.1-1: SNR and L1-RSRP variation for CSI-RS based beam failure detection and link recovery testing in non-DRX mode

A.7.5.5.11.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the shall detect beam failure and initiat link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 260+10 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.5.12 Beam Failure Detection and Link Recovery Test for FR2-2 PCell configured with CSI-RS-based BFD and LR in DRX mode

A.7.5.5.12.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct CSI-RS-based link recovery based on beam candicate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR2-2 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.7.5.5.12.1-1, A.7.5.5.12.1-2, A.7.5.5.12.1-3, and A.7.5.5.12.1-4 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.7.5.5.12.1-1 shows the variation of the downlink SNR

of the CSI-RS in set q_0 in the active cell to emulate CSI-RS based beam failure. Figure A.7.5.5.12.1-1 additionally shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

Table A.7.5.5.12.1-1: Supported test configurations for FR2-2 PCell

Configuration	Description
1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth
2	TDD duplex mode, 480 kHz SSB SCS, 400 MHz bandwidth
3	TDD duplex mode, 960 kHz SSB SCS, 400 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR2-2	

Table A.7.5.5.12.1-2: General test parameters for FR2-2 PCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

Parameter	Test Config.	Unit	Value	Comment
			Test 1	
Active PCell	1,2,3		Cell 1	
RF Channel Number	1,2,3		1	
Duplex mode	1,2,3		TDD	
TDD Configuration	1,2,3		TDDConf.3.1	
$BW_{channel}$	1		100: $N_{RB,c}$ = 66	
	2		400: $N_{RB,c}$ = 66	
	3		400: $N_{RB,c}$ = 33	
Data RBs allocated	1		66	
	2		66	
	3		33	
PDSCH/PDCCH subcarrier spacing	1	kHz	120	
	2	kHz	480	
	3	kHz	960	
DL initial BWP configuration	1,2,3		DLBWP.0.1	
DL dedicated BWP configuration	1,2,3		DLBWP.1.1	
UL initial BWP configuration	1,2,3		ULBWP.0.1	
UL dedicated BWP configuration	1,2,3		ULBWP.1.1	
PDSCH Reference Channel	1,2,3		SR.3.2 TDD	
RMSI CORESET Reference Channel	1,2,3		CR.3.1 TDD	
Dedicated CORESET Reference Channel	1,2,3		CCR.3.1 TDD	
OCNG parameters	1,2,3		OP.1	
CP length	1,2,3		Normal	
PDSCH/PDCCH TCI state	1,2,3		TCI.State.0	
CSI-RS for tracking	1,2,3		TRS.2.1 TDD	
SSB Configuration	1,2,3		SSB.1 FR2	
SMTC Configuration	1,2,3		SMTC.3	
PRACH Configuration	1,2,3		FR2 PRACH configuration 4	A.3.8.3.4
DRX configuration	1,2,3		DRX.3	A.3.3.3
CSI-RS configuration for BFD/CBD/RLM	1,2,3		CSI-RS.3.2 TDD	A.3.14.2
CSI-RS index assigned as BFD RS (q_0)	1,2,3		0	
CSI-RS index assigned as CBD RS (q_1)	1,2,3		1	
CSI-RS index assigned as RLM RS	1,2,3		0,1	

Beam failure detection transmission parameters	DCI format	1,2,3		1-0	
	Number of Control OFDM symbols	1,2,3		2	
	Aggregation level	1,2,3	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1,2,3	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1,2,3	dB	0	
	DMRS precoder granularity	1,2,3		REG bundle size	
	REG bundle size	1,2,3		6	
Gap pattern ID		1,2,3		N/A	
rlmInSyncOutOfSyncThreshold		1,2,3		absent	Value 0 is applied. (Table 8.1.1-1).
rsrp-ThresholdSSB		1,2,3	dBm/SCS	-95	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS		1,2,3		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount		1,2,3		n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer		1,2,3		pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting		1,2,3		CSI-RS.3.1 TDD	A.3.14.2
reportConfigType		1,2,3		periodic	
reportQuantity		1,2,3		cri-RI-PMI-CQI	
CSI reporting periodicity		1,2,3	slot	40	
CSI reporting offset		1,2,3	slot	4	
T310		1,2,3	ms	1000	
N310		1,2,3		2	
T1		1,2,3	s	1	The UE shall be fully synchronized to cell 1 during T1
T2		1,2,3	s	5.43	
T3		1,2,3	s	5.16	
T4		1,2,3	s	0	
T5		1,2,3	s	0.31	
D1		1,2,3	s	0.27	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.					

Table A.7.5.5.12.1-3: Cell specific test parameters for FR2-2 PCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
AoA setup		Setup 1 defined in A.3.15				
Assumption for UE beams Note 10		Rough				
EPRE ratio of PDCCH DMRS to SSS	dB	0				
EPRE ratio of PDCCH to PDCCH DMRS	dB					
EPRE ratio of PBCH DMRS to SSS	dB					
EPRE ratio of PBCH to PBCH DMRS	dB					
EPRE ratio of PSS to SSS	dB					
EPRE ratio of PDSCH DMRS to SSS	dB					
EPRE ratio of PDSCH to PDSCH DMRS	dB					

EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set q_0	Config 1,2,3	dB	5 Note 11	-3 Note 11	-12	-12	-12
SNR_CSI-RS of set q_1	Config 1,2,3	dB	0.2	0.2	20.2	20.2	20.2
CSI-RS_RP of set q_1	Config 1,2,3	dBm/SCS	-104.5	-104.5	-84.5	-84.5	-84.5
N_{oc}	Config 1,2,3	dBm/120 KHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Void
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.7.5.5.12.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.
Note 10: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband

Table A.7.5.5.12.1-4: Void

Table A.7.5.5.12.1-5: Void

Table A.7.5.5.12.1-6: Void

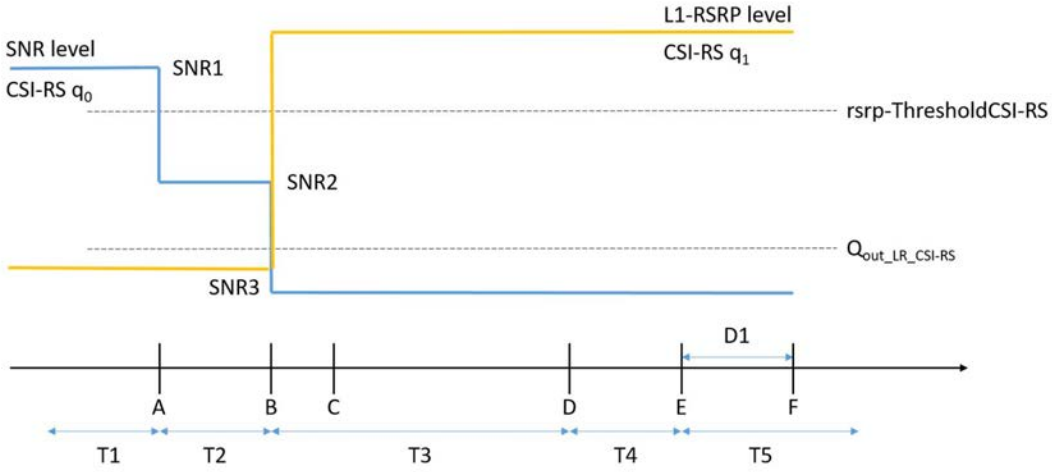

Figure A.7.5.5.12.1-1: SNR and L1-RSRP variation for CSI-RS-based beam failure detection and link recovery testing in DRX mode

A.7.5.5.12.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiat link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 260+10 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.5.13 Scheduling availability restriction during Beam Failure Detection and Link Recovery for FR2-2 PCell configured with SSB-based BFD and LR in non-DRX mode

A.7.5.5.13.1 Test Purpose and Environment

The purpose is to test scheduling availability restrictions when the UE is performing beam failure detection or when the UE is performing L1-RSRP measurement for candidate beam detection, when no DRX is used. This test will verify the scheduling availability restriction requirements in clause 8.5.7 and 8.5.8.

The test parameters are given in Tables A.7.5.5.13.1-1, A.7.5.5.13.1-2 and A.7.5.5.13.1-3 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.7.5.5.13.1-1 shows the variation of the downlink SNR of the SSB in set q_0 in the active cell to emulate SSB based beam failure. Figure A.7.5.5.13.1-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. This test will focus on the scheduling availability during beam failure detection) and candidate beam detection. In the test, DRX configuration is not enabled. Test is to test the scheduling availability restriction of UE performing beam failure detection and candidate beam detection when SSB RS configured for Beam failure detection and candidate beam detection. During the test the UE is scheduled to transmit continuously in UL.

Table A.7.5.513.1-1: Supported test configurations for FR2-2 PCell

Configuration	Description
1	NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
2	NR 240 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.7.5.5.13.1-2: General test parameters for FR2-2 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter	Test Config.	Unit	Value	Comment
			Test 1	
Active PCell	1-2		Cell 1	
RF Channel Number	1-2		1	
Duplex mode	1-2		TDD	
TDD Configuration	1-2		TDDConf.3.1	
$BW_{channel}$	1-2		100: $N_{RB,c}$ = 66	
Data RBs allocated	1-2		66	
PDSCH/PDCCH subcarrier spacing	1-2	kHz	120	

DL initial BWP configuration		1-2		DLBWP.0.1	
DL dedicated BWP configuration		1-2		DLBWP.1.1	
UL initial BWP configuration		1-2		ULBWP.0.1	
UL dedicated BWP configuration		1-2		ULBWP.1.1	
PDSCH Reference Channel		1		SR.3.2 TDD	
		2		SR.3.3 TDD	
RMSI CORESET Reference Channel		1		CR.3.1 TDD	
		2		CR.3.2 TDD	
Dedicated CORESET Reference Channel		1		CCR.3.1 TDD	
		2		CCR.3.7 TDD	
OCNG parameters		1-2		OP.1	
CP length		1-2		Normal	
PDSCH/PDCCH TCI state		1-2		TCI.State.0	
CSI-RS for tracking		1-2		TRS.2.1 TDD	
SSB Configuration		1		SSB.1 FR2	
		2		SSB.2 FR2	
SMTC Configuration		1-2		SMTC.1	
PRACH Configuration		1-2		FR2 PRACH configuration 2	A.3.8.3.2
DRX configuration		1-2		OFF	
SSB index assigned as BFD RS (q_0)		1-2		0	
SSB index assigned as CBD RS (q_1)		1-2		1	
Beam failure detection transmission parameters	DCI format	1-2		1-0	
	Number of Control OFDM symbols	1-2		2	
	Aggregation level	1-2	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1-2	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1-2	dB	0	
	DMRS precoder granularity	1-2		REG bundle size	
	REG bundle size	1-2		6	
Gap pattern ID		1-2		N/A	
rlmInSyncOutOfSyncThreshold		1-2		absent	Value 0 is applied. (Table 8.1.1-1).
rsrp-ThresholdSSB		1	dBm/SCS	-95	Threshold used for $Q_{in_LR_SSB}$
		2		-92	
powerControlOffsetSS		1-2		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount		1-2		n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer		1-2		pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting		1-2		CSI-RS.3.1 TDD	
reportConfigType		1-2		periodic	
reportQuantity		1-2		cri-RI-PMI-CQI	
CSI reporting periodicity		1-2	slot	40	
CSI reporting offset		1-2	slot	4	
T310		1-2	ms	1000	
N310		1-2		2	
T1		1-2	s	1	The UE shall be fully synchronized to cell 1 during T1

T2	1-2	s	2.6	
T3	1-2	s	1.64	
T4	1-2	s	0	
T5	1-2	s	1.01	
D1	1-2	s	0.97	
Note 1: All configurations are assigned to the UE prior to the start of time period T1.				
Note 2: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.7.5.5.13.1-3: Cell specific test parameters for FR2-2 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
AoA Setup			Setup1 defined in A.3.15.1				
Assumption for UE beams Note 10			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q_0	Config 1-2	dB	5 Note 11	-3 Note 11	-12	-12	-12
SNR_SSB of set q_1	Config 1-2	dB	0.2	0.2	20.2	20.2	20.2
SSB_RP of set q_1	Config 1	dBm/SCS	-104.5	-104.5	-84.5	-84.5	-84.5
	Config 2		-101.5	-101.5	-81.5	-81.5	-81.5
N_{oc}	Config 1-2	dBm/120 kHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Void
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.7.5.5.13.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.
Note 10: Information about types of UE beam given in B.2.1.3 and does not limit UE implementation or test system implementation
Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband.

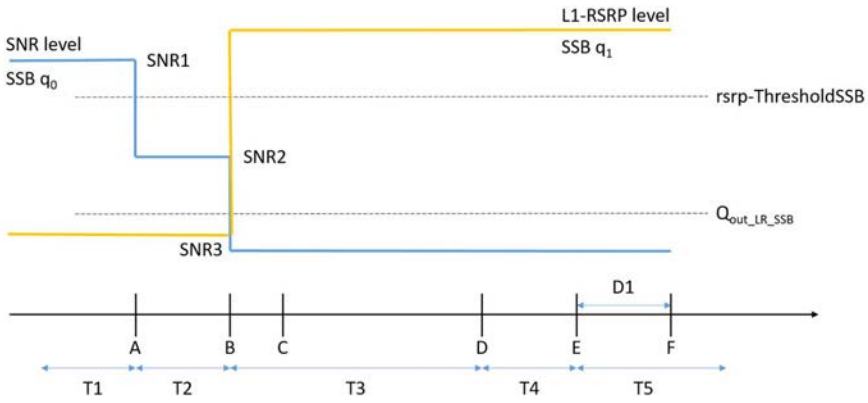

Figure A.7.5.5.13.1-1: SNR and L1-RSRP variation SSB for SSB-based beam failure detection and link recovery testing in non-DRX mode

A.7.5.5.13.2 Test Requirements

The UE behaviour during time duration T3 follows the requirements defined in clause 8.5.7.3:

- The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on BFD-RS symbols to be measured for beam failure detection.

The UE behaviour during time durations T4 and T5 follows the requirements defined in clause 8.5.8.3:

- The UE is not expected to transmit PUCCH/PUSCH or receive PDCCH/PDSCH on reference symbols to be measured for candidate beam detection.

A.7.5.6 Active BWP switch

A.7.5.6.1 DCI-based and Timer-based Active BWP Switch

A.7.5.6.1.1 NR FR2- NR FR2 DL active BWP switch of SCell with non-DRX in SA

A.7.5.6.1.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement defined in clause 8.6, and interruption requirement on other active serving cell defined in clause 8.2.2.2.5.

The supported test configurations are shown in Table A.7.5.6.1.1.1-1 below. The test scenario comprises of one PCell (Cell 1) and one SCell (Cell 2) as given in Table A.7.5.6.1.1.1-2. NR Cell-specific parameters are specified in Table A.7.5.6.1.1.1-3 below. OTA related test parameters are shown in table A.7.5.6.1.1.1-4 below.

PDCCHs indicating new transmissions shall be sent continuously on SCell (Cell 2) to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on Cell 2 and the time duration of T2.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

Before the test starts,

UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), and Cell 2 (SCell) on radio channel 2 (SCC).

UE is configured with 2 different UE-specific downlink bandwidth parts for SCell, BWP-1 and BWP-2, in Cell 2 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.

UE is configured with 1 UE-specific downlink bandwidth parts the same as initial BWP for PSCell, BWP-0 in Cell 1 before starting the test.

UE is indicated in firstActiveDownlinkBWP-Id that the active DL BWP is BWP-1 in SCell.

UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-0 in PCell.

UE is configured with a bwp-InactivityTimer timer value for SCell.

All cells have constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

Time period T1 starts when a DCI format 1_1 command for SCell DL BWP switch, sent from the test equipment to the UE, is received at the UE side in SCell's slot # denoted *i*. The UE shall switch its bandwidth part from BWP-1 to BWP-2.

The UE shall be able to receive PDSCH no later than the first DL slot that occurs after the beginning of SCell's DL slot ($i+T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the SCell on PCell no later than the first UL slot that occurs after the beginning of slot ($i+T_{BWPswitchDelay}+k1$). The UE shall be continuously scheduled on SCell's BWP-2 no later than the first DL slot that occurs after the beginning of slot ($i+T_{BWPswitchDelay}$).

The starting time of PCell (Cell 1) interruption due to BWP switch on SCell shall occur within the BWP switch delay.

During T2, the test equipment won't transmit DCI format for PDSCH reception on SCell(Cell 2).

During T3,

The time period T3 starts from the slot #*j*, where j is the first slot of the half subframe immediately after *bwp-InactivityTimer* timer expires. The UE should switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1.

The UE shall be able to receive PDSCH no later than the first DL slot that occurs after the beginning of SCell's DL slot ($j+T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the SCell on PCell at latest on the first UL slot that occurs after the beginning of slot ($j+T_{BWPswitchDelay}+k1$). The UE shall be continuously scheduled on SCell's BWP-1 no later than the first DL slot that occurs after the beginning of slot ($j+T_{BWPswitchDelay}$).

The starting time of PCell (Cell 1) interruption due to BWP switch of SCell shall occur within the BWP switch delay.

The test equipment verifies the DL BWP switch time in SCell by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK/NACK is received.

The test equipment verifies that potential interruption to PCell is carried out in the correct time span by monitoring ACK/NACK sent in PCell during BWP switch of SCell, respectively.

Table A.7.5.6.1.1.1-1: DL BWP switch supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD -TDD duplex mode
Note 1: Void	

Table A.7.5.6.1.1.1-2: General test parameters for DL BWP switch in SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1, 2	Two NR radio channels are used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active SCell		Cell 2	SCell on RF channel number 2.
CP length		Normal	
DRX		OFF	For both PCell and SCell
bwp-InactivityTimer	ms	200	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell2 timing offset to cell1	μs	3	Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.
T1	s	0.2	
T2	s	0.2	
T3	s	0.2	

Table A.7.5.6.1.1.1-3: NR Cell specific test parameters for DL BWP switch in SA

Parameter	Unit	Cell 1	Cell2
Frequency Range		FR2	FR2
Duplex mode		TDD	
TDD configuration		TDDConf.3.1	
$BW_{channel}$		100 MHz: $N_{RB,c}$ = 66	
Active BWP ID		0	0
Downlink initial BWP Configuration		DLBWP.0.2	
Uplink initial BWP Configuration		ULBWP.0.2	N.A.
Downlink active BWP-0 Configuration		DLBWP.0.2	N.A.
Downlink active BWP-1 Configuration		N.A.	DLBWP.1.1
Downlink active BWP-2 Configuration		N.A.	DLBWP.1.3
Uplink active BWP-0 Configuration		ULBWP.0.2	N.A.
Uplink active BWP-1 Configuration		N.A.	N.A.
Uplink active BWP-2 Configuration		N.A.	N.A.
PDSCH Reference measurement channel		SR.3.1 TDD	
TRS configuration		TRS.2.1 TDD	
TCI state		TCI.State.0	
RMSI CORESET parameters		CR.3.1 TDD	
Dedicated CORESET parameters		CCR.3.1 TDD	
OCNG Patterns		OP.1	
SSB Configuration		SSB.1 FR2	
SMTC Configuration		SMTC.1	
Correlation Matrix and Antenna Configuration		1x2 Low	
EPRE ratio of PSS to SSS	dB	0	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			

EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
Propagation Condition		AWGN	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.7.5.6.1.1.1-4: OTA related test parameters for BWP switching test case

Parameter	Unit	Cell 1	Cell 2
Angle of arrival configuration		Setup 1 defined in clause A.3.15.1	Setup 1 defined in clause A.3.15.1
Assumtion for UE beams Note 6		Fine	Fine
N_{oc} Note1	dBm/15kHz	-112	-112
N_{oc} Note1	dBm/SCS	-103	-103
SS-RSRP Note2	dBm/SCS Note3	-85	-85
$\hat{E}_s/I_{ot}$	dB	18	18
Io Note4	dBm/95.04 MHz Note4	-56	-56
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone. Note 6: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.			

A.7.5.6.1.1.2 Test Requirements

During T1, the UE shall start to send the ACK/NACK for SCell on PCell from the first UL slot that occurs after the beginning of DL slot ($i+T_{BWPswitchDelay}+k1$).

During T3, the UE shall start to send the ACK/NACK for SCell on PCell from the first UL slot that occurs after the beginning of DL slot ($j+T_{BWPswitchDelay}+k1$).

Where, *k1* is the timing between DL data receiving and acknowledgement as specified in [7].

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 8.6.2-1.

All of the above test requirements shall be fulfilled in order for the observed SCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

During T1 and T3, the start time of PCell interruption during SCell active BWP switch shall not happen outside the BWP switch delay.

The interruption of PCell shall not be longer than the interruption duration specified for active BWP switch in clause 8.2.2.2.5.

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch interruption to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK in the first UL slot that occurs after the beginning of DL slot ($i+ T_{BWPswitchDelay}+k1$), ($j+ T_{BWPswitchDelay}+k1$), then the UE shall use the next available uplink resource for reporting the corresponding ACK.

A.7.5.6.1.2 NR FR1- NR FR2 DL active BWP switch of SCell with non-DRX in SA

A.7.5.6.1.2.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement defined in clause 8.6, and interruption requirement on other active serving cell defined in clause 8.2.2.2.5.

The supported test configurations are shown in Table A.7.5.6.1.2.1-1 below. The test scenario comprises of one NR PCell (Cell 1) and one NR SCell (Cell 2). The general parameters are given in Table A.7.5.6.1.2.1-2. NR Cell-specific parameters are specified in Table A.7.5.6.1.2.1-3 below. OTA related test parameters are shown in table A.7.5.6.1.2.1-4 below.

PDCCHs indicating new transmissions shall be sent continuously on SCell (Cell 2) to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on Cell 2 and the time duration of T2.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

Before the test starts,

UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), and Cell 2 (SCell) on radio channel 2 (SCC).

UE is configured with 2 different UE-specific downlink bandwidth parts for SCell, BWP-1 and BWP-2, in Cell 2 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.

UE is configured with 1 UE-specific downlink bandwidth parts the same as initial BWP for PCell, BWP-0 in Cell 1 before starting the test.

UE is indicated in firstActiveDownlinkBWP-Id that the active DL BWP is BWP-1 in SCell.

UE is indicated in firstActiveDownlinkBWP-Id that the active DL BWP is BWP-0 in PCell.

UE is configured with a bwp-InactivityTimer timer value for SCell.

All cells have constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

Time period T1 starts when a DCI format 1_1 command for SCell DL BWP switch, sent from the test equipment to the UE, is received at the UE side in SCell's slot # denoted *i*. The UE shall switch its bandwidth part from BWP-1 to BWP-2.

The UE shall be able to receive PDSCH no later than the first DL slot that occurs after the beginning of SCell's DL slot ($i+T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the SCell

on PCell no later than the first UL slot that occurs after the begining of slot ($i+T_{BWPswitchDelay}+k1$). The UE shall be continuously scheduled on SCell's BWP-2 no later than the first DL slot that occurs after the beginning of slot ($i+T_{BWPswitchDelay}$).

The starting time of PCell (Cell 1) interruption due to BWP switch on SCell shall occur within the BWP switch delay if the UE doesn't support per-FR gap, otherwise no interruption due to BWP switch on PCell is allowed.

During T2, the test equipment won't transmit DCI format for PDSCH reception on SCell (Cell 2).

During T3,

The time period T3 starts from the slot #*j*, where j is the first slot of the half subframe immediately after *bwp-InactivityTimer* timer expires. The UE should switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1.

The UE shall be able to receive PDSCH no later than the first DL slot that occurs after the beginning of SCell's DL slot ($j+T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the SCell on PCell at latest on the first UL slot that occurs after the beginning of slot ($j+T_{BWPswitchDelay}+k1$). The UE shall be continuously scheduled on SCell's BWP-1 no later than the first DL slot that occurs after the beginning of slot ($j+T_{BWPswitchDelay}$).

The starting time of PCell (Cell 1) interruption due to BWP switch of SCell shall occur within the BWP switch delay if the UE doesn't support per-FR gap, otherwise no interruption due to BWP switch on PCell is allowed.

The test equipment verifies the DL BWP switch time in SCell by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK/NACK is received.

The test equipment verifies that potential interruption to PCell is carried out in the correct time span by monitoring ACK/NACK sent in PCell during BWP switch of SCell, respectively.

Table A.7.5.6.1.2.1-1: DL BWP switch supported test configurations

Config	Description
1	PCell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode SCell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	PCell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode SCell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
3	PCell: NR 30 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode SCell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.7.5.6.1.2.1-2: General test parameters for DL BWP switch in SA

Parameter	Unit	Value	Comment
NR RF Channel Number		2	Two NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active SCell		Cell 2	SCell on RF channel number 2.
CP length		Normal	
DRX		OFF	For both PCell and SCell
bwp-InactivityTimer	ms	200	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on SCC.
Cell2 timing offset to cell1	µs	3	Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.
T1	s	0.2	

T2	s	0.2	
T3	s	0.2	

Table A.7.5.6.1.2.1-3: NR Cell specific test parameters for DL BWP switch in SA

Parameter		Unit	Cell 1	Cell2
Frequency Range			FR1	FR2
Duplex mode	Config 1		FDD	TDD
	Config 2,3		TDD	
TDD configuration	Config 1		Not Applicable	TDDConf.3.1
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
$BW_{channel}$	Config 1,2	MHz	10 MHz: $N_{RB,c}$ = 52	100 MHz: $N_{RB,c}$ = 66
	Config 3		40 MHz: $N_{RB,c}$ = 106	
Active BWP ID			0	1, 2
Downlink initial BWP Configuration			DLBWP.0.2	
Uplink initial BWP Configuration			ULBWP.0.2	N.A.
Downlink active BWP-0 Configuration			DLBWP.0.2	N.A.
Downlink active BWP-1 Configuration			N.A.	DLBWP.1.1
Downlink active BWP-2 Configuration			N.A.	DLBWP.1.3
Uplink active BWP-0 Configuration			ULBWP.0.2	N.A.
Uplink active BWP-1 Configuration			N.A.	N.A.
Uplink active BWP-2 Configuration			N.A.	N.A.
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	SR.3.1 TDD
	Config 2		SR.1.1 TDD	
	Config 3		SR.2.1 TDD	
RMSI CORESET parameters	Config 1		CR.1.1 FDD	CR.3.1 TDD
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
Dedicated CORESET parameters	Config 1		CCR.1.1 FDD	CCR.3.1 TDD
	Config 2		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD	
OCNG Patterns			OP.1	
SSB Configuration	Config 1,2		SSB.1 FR1	SSB.1 FR2
	Config 3		SSB.2 FR1	
TRS configuration	Config 1,2,3		-	TRS.2.1 TDD
TCI state	Config 1,2,3		TCI.State.0	TCI.State.0
SMTC Configuration			SMTC.1	
Correlation Matrix and Antenna Configuration			NA Link only, see clause A.3.7A	1x2 Low
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				

Propagation Condition		NA Link only, see clause A.3.7A	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.7.5.6.1.2.1-4: OTA related test parameters for BWP switching test case

Parameter	Unit	Cell 1	Cell 2
Angle of arrival configuration		-NA Link only, see clause A.3.7A	Setup 1 defined in clause A.3.15.1
Assumption for UE beams Note 6			Fine
N_{oc} Note1	dBm/15kHz		-112
N_{oc} Note1	dBm/SCS		-103
SS-RSRP Note2	dBm/SCS Note3		-85
$\hat{E}_s/I_{ot}$	dB		18
Io Note4	dBm/95.04 MHz Note4		-56

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone

Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone.

Note 6: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.

A.7.5.6.1.2.2 Test Requirements

During T1, the UE shall start to send the ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot ($i+T_{BWPswitchDelay}+k1$).

During T3, the UE shall start to send the ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot ($j+T_{BWPswitchDelay}+k1$).

Where, *k1* is the timing between DL data receiving and acknowledgement as specified in [7].

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 8.6.2-1.

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

If the UE doesn't support per-FR gap,

- During T1 and T3, the start time of SCell interruption during PCell active BWP switch shall not happen outside the BWP switch delay.

- The interruption of SCell shall not be longer than the interruption duration specified for active BWP switch in clause 8.2.2.2.5.

Otherwise no interruption due to BWP switch on SCell is allowed.

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch interruption to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK/NACK in the first UL slot that occurs after the beginning of DL slot ($i+ T_{BWPswitchDelay}+k1$), ($j+ T_{BWPswitchDelay}+k1$), then the UE shall use the next available uplink resource for reporting the corresponding ACK/NACK.

A.7.5.6.1.3 NR FR2 DL active BWP switch with non-DRX in SA

A.7.5.6.1.3.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement defined in clause 8.6. Supported test configurations are shown in Table A.7.5.6.1.3.1-1.

The test scenario comprises of one cell (Cell 1) as given in Table A.7.5.6.1.3.1-2. Cell-specific parameters of NR PCell is specified in Table A.7.5.6.1.3.1-3 below. The OTA related test parameters for FR2 is shown in Table A.7.5.6.1.3.1-4.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 on radio channel 1.
- UE is configured with 2 different UE-specific downlink bandwidth parts, BWP-1 and BWP-2 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1.
- UE is configured with a *bwp-InactivityTimer* timer value for Cell1.

All cells have constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

Time period T1 starts when a DCI format 1_1 command for DL BWP switch, sent from the test equipment to the UE, is received at the UE side in Cell 1's slot # denoted *i*. The UE should switch its bandwidth part from BWP-1 to BWP-2.

The UE shall be able to receive PDSCH on the first DL slot that occurs after the beginning of Cell 1's DL slot ($i+T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the Cell 1 no later than the first UL slot that occurs after the beginning of slot ($i+T_{BWPswitchDelay}+k1$). The UE shall be continuously scheduled on Cell 1's BWP-2 starting from the first DL slot that occurs after the beginning of slot ($i+T_{BWPswitchDelay}$).

During T2, the test equipment won't transmit DCI format for PDSCH reception on Cell 1.

During T3,

The time period T3 starts from the slot #*j*, where j is the first slot of the half subframe immediately after *bwp-InactivityTimer* timer expires. The UE should switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1.

The UE shall be able to receive PDSCH on the first DL slot that occurs after the beginning of Cell 1's DL slot ($j+T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the Cell 1 at latest on the first UL slot that occurs after the beginning of slot ($j+T_{BWPswitchDelay}+k1$). The UE shall be continuously scheduled on Cell 1's BWP-1 starting from the first DL slot that occurs after the beginning of slot ($j+T_{BWPswitchDelay}$).

The test equipment verifies the DL BWP switch time by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK is received.

Table A.7.5.6.1.3.1-1: DL BWP switch supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: Void. Note 2: A UE which fulfils the requirements in test case A.7.5.6.1.1 or A.7.5.6.1.2 can skip the test cases in A.7.5.6.1.3.	

Table A.7.5.6.1.3.1-2: General test parameters for DL BWP switch in SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active Cell		Cell 1	Cell on RF channel number 1.
CP length		Normal	
DRX		OFF	For both PCell and PSCell
bwp-InactivityTimer	ms	[200]	
T1	s	[0.2]	
T2	s	[0.2]	
T3	s	[0.2]	

Table A.7.5.6.1.3.1-3: NR Cell specific test parameters for DL BWP switch in SA

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
$BW_{channel}$		100 MHz: $N_{RB,c}$ = 66
Active BWP ID		1, 2
Initial DL BWP Configuration		DLBWP.0.2 Note 2
Active DL BWP-1 Configuration		DLBWP.1.1 Note 2
Active DL BWP-2 Configuration		DLBWP.1.3 Note 2
Initial UL BWP Configuration		ULBWP.0.2 Note 2
Active UL BWP-1 Configuration		ULBWP.1.1 Note 2
Active UL BWP-2 Configuration		ULBWP.1.3 Note 2
PDSCH Reference measurement channel		SR.3.1 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP.1
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
TCI State		TCI.State.0
TRS Configuration		TRS.2.1 TDD
Correlation Matrix and Antenna Configuration		1x2 Low

EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		AWGN
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 2: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].		

Table A.7.5.6.1.3.1-4: OTA related test parameters for DL BWP switch in SA

Parameter	Unit	Cell 2
Angle of arrival configuration		Setup 1 defined in clause A.3.15.1
Assumption for UE beams Note 6		Fine
N_{oc} Note 1	dBm/15 kHz	-112
N_{oc} Note 1	dBm/SCS	-103
SS-RSRP Note 2	dBm/120 kHz Note3	-85
$\hat{E}_s/I_{ot}$	dB	18
$\hat{E}_s/N_{oc}$ Note 5	dB	18
Io Note2	dBm/95.04 MHz Note4	-56
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.		
Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.		
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.		
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone		
Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone.		
Note 6: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.		

A.7.5.6.1.3.2 Test Requirements

During T1, the UE shall start to send the ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot ($i+T_{BWPswitchDelay}+k1$).

During T3, the UE shall start to send the ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot ($j+T_{BWPswitchDelay}+k1$).

Where, *k1* is the timing between DL data receiving and acknowledgement as specified in [7].

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 8.6.2-1.

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK/NACK in the first UL slot that occurs after the beginning of DL slot ($i+ T_{BWPswitchDelay}+k1$), ($j+ T_{BWPswitchDelay}+k1$), then the UE shall use the next available uplink resource for reporting the corresponding ACK/NACK.

A.7.5.6.1.4 NR FR2-2- NR FR2-2 DL active BWP switch of SCell with non-DRX in SA

A.7.5.6.1.4.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement defined in clause 8.6, and interruption requirement on other active serving cell defined in clause 8.2.2.2.5.

The supported test configurations are shown in Table A.7.5.6.1.4.1-1 below. The test scenario comprises of one PCell (Cell 1) and one SCell (Cell 2) as given in Table A.7.5.6.1.4.1-2. NR Cell-specific parameters are specified in Table A.7.5.6.1.4.1-3 below. OTA related test parameters are shown in table A.7.5.6.1.4.1-4 below.

PDCCHs indicating new transmissions shall be sent continuously on SCell (Cell 2) to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on Cell 2 and the time duration of T2.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

Before the test starts,

UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), and Cell 2 (SCell) on radio channel 2 (SCC).

UE is configured with 2 different UE-specific downlink bandwidth parts for SCell, BWP-1 and BWP-2, in Cell 2 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.

UE is configured with 1 UE-specific downlink bandwidth parts the same as initial BWP for PSCell, BWP-0 in Cell 1 before starting the test.

UE is indicated in firstActiveDownlinkBWP-Id that the active DL BWP is BWP-1 in SCell.

UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-0 in PCell.

UE is configured with a bwp-InactivityTimer timer value for SCell.

All cells have constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

Time period T1 starts when a DCI format 1_1 command for SCell DL BWP switch, sent from the test equipment to the UE, is received at the UE side in SCell's slot # denoted *i*. The UE shall switch its bandwidth part from BWP-1 to BWP-2.

The UE shall be able to receive PDSCH no later than the first DL slot that occurs after the beginning of SCell's DL slot ($i+T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the SCell on PCell no later than the first UL slot that occurs after the beginning of slot ($i+T_{BWPswitchDelay}+k1$). The UE shall be continuously scheduled on SCell's BWP-2 no later than the first DL slot that occurs after the beginning of slot ($i+T_{BWPswitchDelay}$).

The starting time of PCell (Cell 1) interruption due to BWP switch on SCell shall occur within the BWP switch delay.

During T2, the test equipment won't transmit DCI format for PDSCH reception on SCell(Cell 2).

During T3,

The time period T3 starts from the slot #*j*, where j is the first slot of the half subframe immediately after *bwp-InactivityTimer* timer expires. The UE should switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1.

The UE shall be able to receive PDSCH no later than the first DL slot that occurs after the beginning of SCell's DL slot ($j+T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the SCell on PCell at latest on the first UL slot that occurs after the beginning of slot ($j+T_{BWPswitchDelay}+k1$). The UE shall be continuously scheduled on SCell's BWP-1 no later than the first DL slot that occurs after the beginning of slot ($j+T_{BWPswitchDelay}$).

The starting time of PCell (Cell 1) interruption due to BWP switch of SCell shall occur within the BWP switch delay.

The test equipment verifies the DL BWP switch time in SCell by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK/NACK is received.

The test equipment verifies that potential interruption to PCell is carried out in the correct time span by monitoring ACK/NACK sent in PCell during BWP switch of SCell, respectively.

Table A.7.5.6.1.4.1-1: DL BWP switch supported test configurations

Configuration	Description
1	NR TDD, SSB SCS 120 kHz, data SCS 120 kHz, BW 100 MHz
2	NR TDD, SSB SCS 480 kHz, data SCS 480 kHz, BW 400 MHz
3	NR TDD, SSB SCS 960 kHz, data SCS 960 kHz, BW 400 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.7.5.6.1.4.1-2: General test parameters for DL BWP switch in SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1, 2	Two NR radio channels are used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active SCell		Cell 2	SCell on RF channel number 2.
CP length		Normal	
DRX		OFF	For both PCell and SCell
bwp-InactivityTimer	ms	200	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell2 timing offset to cell1	µs	3	Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.
T1	s	0.2	
T2	s	0.2	
T3	s	0.2	

Table A.7.5.6.1.4.1-3: NR Cell specific test parameters for DL BWP switch in SA

Parameter	Unit	Config	Cell 1	Cell2
Frequency Range		1,2,3	FR2-2	FR2-2

Duplex mode		1,2,3	TDD	
TDD configuration		1	TDDConf.3.1	
		2	TBD	
		3	TBD	
$BW_{channel}$		1	100 MHz: $N_{RB,c}$ = 66	
		2	400 MHz: $N_{RB,c}$ = 66	
		3	400 MHz: $N_{RB,c}$ = 33	
Active BWP ID		1,2,3	0	0
Downlink initial BWP Configuration		1,2,3	DLBWP.0.2	
Uplink initial BWP Configuration		1,2,3	ULBWP.0.2	N.A.
Downlink active BWP-0 Configuration		1,2,3	DLBWP.0.2	N.A.
Downlink active BWP-1 Configuration		1,2,3	N.A.	DLBWP.1.1
Downlink active BWP-2 Configuration		1,2,3	N.A.	DLBWP.1.3
Uplink active BWP-0 Configuration		1,2,3	ULBWP.0.2	N.A.
Uplink active BWP-1 Configuration		1,2,3	N.A.	N.A.
Uplink active BWP-2 Configuration		1,2,3	N.A.	N.A.
PDSCH Reference measurement channel		1	SR.3.1 TDD	
		2	TBD	
		3	TBD	
TRS configuration		1	TRS.2.1 TDD	
		2	TBD	
		3	TBD	
TCI state		1,2,3	TCI.State.0	
RMSI CORESET parameters		1	CR.3.1 TDD	
		2	TBD	
		3	TBD	
Dedicated CORESET parameters		1	CCR.3.1 TDD	
		2	TBD	
		3	TBD	
OCNG Patterns		1,2,3	OP.1	
SSB Configuration		1	SSB.1 FR2	
		2	TBD	
		3	TBD	
SMTC Configuration		1,2,3	SMTC.1	
Correlation Matrix and Antenna Configuration			1x2 Low	
EPRE ratio of PSS to SSS	dB		0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				

EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
Propagation Condition			AWGN	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				

Table A.7.5.6.1.4.1-4: OTA related test parameters for BWP switching test case

Parameter	Unit	Config	Cell 1	Cell 2
Angle of arrival configuration		1,2,3	Setup 1 defined in clause A.3.15.1	Setup 1 defined in clause A.3.15.1
Assumtion for UE beams Note 6		1,2,3	Fine	Fine
N_{oc} Note1	dBm/15kHz		-112	-112
N_{oc} Note1	dBm/SCS	1	-103	-103
		2	-97	-97
		3	-94	-94
SS-RSRP Note2	dBm/SCS Note3	1	-85	-85
		2	-79	-79
		3	-76	-76
$\hat{E}_s/I_{ot}$	dB		18	18
Io Note4	dBm/95.04 MHz Note4	1	-56	-56
	dBm/380.16 MHz Note4	2,3	-50.0	-50.0
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone				
Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone.				
Note 6: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.				

A.7.5.6.1.4.2 Test Requirements

During T1, the UE shall start to send the ACK/NACK for SCell on PCell from the first UL slot that occurs after the beginning of DL slot ($i+T_{BWPswitchDelay}+k1$).

During T3, the UE shall start to send the ACK/NACK for SCell on PCell from the first UL slot that occurs after the beginning of DL slot ($j+T_{BWPswitchDelay}+k1$).

Where, $k1$ is the timing between DL data receiving and acknowledgement as specified in [7].

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 8.6.2-1.

All of the above test requirements shall be fulfilled in order for the observed SCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

During T1 and T3, the start time of PCell interruption during SCell active BWP switch shall not happen outside the BWP switch delay.

The interruption of PCell shall not be longer than the interruption duration specified for active BWP switch in clause 8.2.2.2.5.

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch interruption to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK in the first UL slot that occurs after the beginning of DL slot ($i+ T_{BWPswitchDelay}+k1$), ($j+ T_{BWPswitchDelay}+k1$), then the UE shall use the next available uplink resource for reporting the corresponding ACK.

A.7.5.6.2 RRC-based Active BWP Switch

A.7.5.6.2.1 NR FR2 DL active BWP switch of PCell with non-DRX in SA

A.7.5.6.2.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement for RRC-based BWP switch defined in clause 8.6.3. Supported test configurations are shown in Table A.7.5.6.2.1.1-1.

The test scenario comprises of one PCell (Cell 1) as given in Table A.7.5.6.2.1.1-2. Cell-specific parameters of PCell are specified in Table A.7.5.6.2.1.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC).
- UE has bandwidth part BWP-1 in its RRC-configuration for Cell 1 (PCell).
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 of initial condition in PCell.

All cells have constant signal levels throughout the test.

The test consists of 1 time period, with duration of T1.

During T1,

Time period T1 starts when a *RRCReconfiguration* with updated bandwidth part configuration, sent from the test equipment to the UE, is received at the UE side in PCell's slot # denoted *i*. The UE shall reconfigure its bandwidth part with the updated bandwidth part BWP-1 of final condition.

The UE shall be able to completely receive PDSCH on PCell from the first DL slot that occurs after the beginning of DL slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$ as defined in clause 8.6.3 and starts to report valid ACK/NACK for the PCell from the first UL slot that occurs after the beginning of DL slot i +

$\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$ + k1. The UE shall be continuously scheduled on PCell's BWP-1 starting from the first DL slot that occurs after the beginning of DL slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$.

$T_{RRCprocessingDelay}$ and $T_{BWPswitchDelayRRC}$ are defined in clause 8.6.3.

The test equipment verifies the DL BWP switch time in PCell by counting the time from the time when the RRC Reconfiguration message including updated BWP configurationis sent till the time when RRC Reconfiguration Complete message is received.

Table A.7.5.6.2.1.1-1: DL BWP switch supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.5.6.2.1.1-2: General test parameters for DL BWP switch in SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
CP length		Normal	
DRX		OFF	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
T1	s	0.2	

Table A.7.5.6.2.1.1-3: NR Cell specific test parameters for DL BWP switch in SA

Parameter		Unit	Cell 1
Frequency Range			FR2
Duplex mode			TDD
TDD configuration			TDDConf.3.1
$BW_{channel}$			100 MHz: $N_{RB,c}$ = 66
Active BWP ID			1
Initial DL BWP Configuration			DLBWP.0.2
Initial UL BWP Configuration			ULBWP.0.2
Initial Condition	Active DL BWP-1 Configuration		DLBWP.1.3
	Active UL BWP-1 Configuration		ULBWP.1.3
Final Condition	Active DL BWP-1 Configuration		DLBWP.1.1
	Active UL BWP-1 Configuration		ULBWP.1.1
'PDSCH Reference measurement channel			SR.3.1 TDD
RMSI CORESET parameters			CR.3.1 TDD
Dedicated CORESET parameters			CCR.3.1 TDD
OCNG Patterns			OP.1
SSB Configuration			SSB.1 FR2
SMTC Configuration			SMTC.1
TCI State			TCI.State.0
TRS Configuration			TRS.2.1 TDD
Antenna Configuration			1x2
Propagation Condition			AWGN
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			

EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].

Table A.7.5.6.2.1.1-4: OTA related test parameters for BWP switching test case

Parameter		Unit	Cell 1
Angle of arrival configuration			Setup 1 according to table A.3.15
Assumption for UE beams Note 5			Fine
N_{oc} Note1	NR_TDD_FR2_A	dBm/15kHz	-112
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
N_{oc} Note1	NR_TDD_FR2_A	dBm/SCS	-103
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
SS-RSRP Note2	NR_TDD_FR2_A	dBm/SCS Note3	-85
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
$\hat{E}_s/I_{ot}$		dB	18
Io Note2	NR_TDD_FR2_A	dBm/95.04 MHz Note4	-56
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		

Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.

A.7.5.6.2.1.2 Test Requirements

During T1, the UE shall be ready for the reception of uplink grant for PCell from the first DL slot that occurs after the beginning of slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$ and starts to report valid ACK/NACK for the PCell from the first UL slot that occurs after the beginning of DL slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$ + k1.

Where, *k1* is the timing between DL data receiving and acknowledgement as specified in [7].

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.6.2.2 NR FR2-2 DL active BWP switch of PCell with non-DRX in SA

A.7.5.6.2.2.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement for RRC-based BWP switch defined in clause 8.6.3. Supported test configurations are shown in Table A.7.5.6.2.2.1-1.

The test scenario comprises of one PCell (Cell 1) as given in Table A.7.5.6.2.2.1-2. Cell-specific parameters of PCell are specified in Table A.7.5.6.2.2.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC).
- UE has bandwidth part BWP-1 in its RRC-configuration for Cell 1 (PCell).
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 of initial condition in PCell.

All cells have constant signal levels throughout the test.

The test consists of 1 time period, with duration of T1.

During T1,

> Time period T1 starts when a *RRCReconfiguration* with updated bandwidth part configuration, sent from the test equipment to the UE, is received at the UE side in PSCell's slot # denoted *i*. The UE shall reconfigure its bandwidth part with the updated bandwidth part BWP-1 of final condition.

The UE shall be able to completely receive PDSCH on PCell from the first DL slot that occurs after the beginning of DL slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$ as defined in clause 8.6.3 and starts to report valid ACK/NACK for the PCell from the first UL slot that occurs after the beginning of DL slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$ + k1. The UE shall be continuously scheduled on PSCell's BWP-1 starting from the first DL slot that occurs after the beginning of DL slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$.

$T_{RRCprocessingDelay}$ and $T_{BWPswitchDelayRRC}$ are defined in clause 8.6.3.

The test equipment verifies the DL BWP switch time in PSCell by counting the time from the time when the RRC Reconfiguration message including updated BWP configurationis sent till the time when RRC Reconfiguration Complete message is received.

Table A.7.5.6.2.2.1-1: DL BWP switch supported test configurations

Configuration	Description
1	NR TDD, SSB SCS 120 kHz, data SCS 120 kHz, BW 100 MHz
2	NR TDD, SSB SCS 480 kHz, data SCS 480 kHz, BW 400 MHz
3	NR TDD, SSB SCS 960 kHz, data SCS 960 kHz, BW 400 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.7.5.6.2.2.1-2: General test parameters for DL BWP switch in SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
CP length		Normal	
DRX		OFF	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
T1	s	[0.2]	

Table A.7.5.6.2.2.1-3: NR Cell specific test parameters for DL BWP switch in SA

Parameter	Unit	Config	Cell 1	Cell2
Frequency Range		1,2,3	FR2-2	FR2-2
Duplex mode		1,2,3	TDD	
TDD configuration		1	TDDConf.3.1	
		2	TBD	
		3	TBD	
$BW_{channel}$		1	100 MHz: $N_{RB,c}$ = 66	
		2	400 MHz: $N_{RB,c}$ = 66	
		3	400 MHz: $N_{RB,c}$ = 33	
Active BWP ID		1,2,3	0	0
Downlink initial BWP Configuration		1,2,3	DLBWP.0.2	
Uplink initial BWP Configuration		1,2,3	ULBWP.0.2	N.A.
Downlink active BWP-0 Configuration		1,2,3	DLBWP.0.2	N.A.
Downlink active BWP-1 Configuration		1,2,3	N.A.	DLBWP.1.1

Downlink active BWP-2 Configuration		1,2,3	N.A.	DLBWP.1.3
Uplink active BWP-0 Configuration		1,2,3	ULBWP.0.2	N.A.
Uplink active BWP-1 Configuration		1,2,3	N.A.	N.A.
Uplink active BWP-2 Configuration		1,2,3	N.A.	N.A.
PDSCH Reference measurement channel		1	SR.3.1 TDD	
		2	TBD	
		3	TBD	
TRS configuration		1	TRS.2.1 TDD	
		2	TBD	
		3	TBD	
TCI state		1,2,3	TCI.State.0	
RMSI CORESET parameters		1	CR.3.1 TDD	
		2	TBD	
		3	TBD	
Dedicated CORESET parameters		1	CCR.3.1 TDD	
		2	TBD	
		3	TBD	
OCNG Patterns		1,2,3	OP.1	
SSB Configuration		1	SSB.1 FR2	
		2	TBD	
		3	TBD	
SMTC Configuration		1,2,3	SMTC.1	
Correlation Matrix and Antenna Configuration			1x2 Low	
EPRE ratio of PSS to SSS	dB		0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
Propagation Condition			AWGN	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				

Table A.7.5.6.2.2.1-4: OTA related test parameters for BWP switching test case

Parameter	Unit	Config	Cell 1	Cell 2
Angle of arrival configuration		1,2,3	Setup 1 defined in clause A.3.15.1	Setup 1 defined in clause A.3.15.1

Assumtion for UE beams Note 6		1,2,3	Fine	Fine
N_{oc} Note1	dBm/15kHz		-112	-112
N_{oc} Note1	dBm/SCS	1	-103	-103
		2	-97	-97
		3	-94	-94
SS-RSRP Note2	dBm/SCS Note3	1	-85	-85
		2	-79	-79
		3	-76	-76
$\hat{E}_s/I_{ot}$	dB		18	18
Io Note4	dBm/95.04 MHz Note4	1	-56	-56
	dBm/380.16 MHz Note4	2,3	-50.0	-50.0

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone.
Note 6: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.

A.7.5.6.2.2.2 Test Requirements

During T1, the UE shall be ready for the reception of uplink grant for PCell from the first DL slot that occurs after the beginning of slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$ and starts to report valid ACK/NACK for the PCell from the first UL slot that occurs after the beginning of DL slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$ + k1.

Where, *k1* is the timing between DL data receiving and acknowledgement as specified in [7].

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.6.3 Simultaneous DCI-based and Timer-based Active BWP Switch on multiple CCs

A.7.5.6.3.1 Active BWP switch on multiple SCells with non-DRX in SA

A.7.5.6.3.1.1 Test Purpose and Environment

The purpose of this test is to verify fulfillment of DL BWP switch delay requirement defined in clauses 8.6.2A.1 and 8.6.2B.1, and interruption requirement on other active serving cell defined in clause 8.2.2.2.5.

The supported test configurations are shown in Table A.7.5.6.3.1.1-1 below. The test scenario comprises one PCell (Cell 1) and two SCells (Cell 2 and Cell 3) as given in Table A.7.5.6.3.1.1-2. NR cell-specific parameters are provided in Table A.7.5.6.3.1.1-3, and OTA related test parameters in Table A.7.5.6.3.1.1-4 below.

The test consists of three consecutive time periods with durations T1, T2 and T3, respectively.

PDCCHs indicating new transmissions shall be transmitted in PCell, SCell1 and SCell2 throughout time periods T1 and T3 to ensure that UE sends ACK/NACKs for PDSCH reception in PCell, SCell1 and SCell2. During T2, there shall be scheduling on PDSCH in PCell only.

Before the test starts,

UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), Cell 2 (SCell1) on radio channel 2 (SCC1), and Cell 3 (SCell2) on radio channel 3 (SCC2).

UE is configured with a single UE-specific downlink bandwidth part, BWP-0, for Cell 1 (PCell). BWP-0 includes the bandwidth of the initial DL BWP and SSB.

UE is configured with two different UE-specific downlink bandwidth parts, BWP-1 and BWP-2, for Cell 2 (SCell1). BWP-1 and BWP-2 include the bandwidth of the initial DL BWP and SSB.

UE is configured with two different UE-specific downlink bandwidth parts, BWP-3 and BWP-4, for Cell 3 (SCell2). BWP-3 and BWP-4 include the bandwidth of the initial DL BWP and SSB.

UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-0 in PCell.

UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in SCell1.

UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-3 in SCell2.

UE is configured with a *bwp-InactivityTimer* timer value for SCell1 and SCell2, respectively.

All cells have constant signal levels throughout the test.

Time period T1 starts when the UE simultaneously receives DCI format 1_1 commands for DL BWP switch in SCell1 and SCell2, respectively, in a slot # denoted *m*. The UE shall switch its SCell1 bandwidth part from BWP-1 to BWP-2, and its SCell2 bandwidth part from BWP-3 to BWP-4. The UE shall be able to receive PDSCH in SCell1 and SCell2 starting from the first DL slot that occurs after slot ($m+T_{MultipleBWPswitchDelay}$) as defined in clause 8.6.2A.1, and to transmit ACK/NACKs in SCell1 and SCell2 from the first UL slot that occurs after ($m+T_{BWPswitchDelay}+k1$) where *k1* is specified in [7]. The UE shall be continuously scheduled in SCell1 BWP-2 and SCell2 BWP-4 no later than in the first DL slot that occurs after slot ($m+T_{MultipleBWPswitchDelay}$). The starting time of any interruption on PCell due to DL BWP switching of SCell1 and SCell2 shall occur within the BWP switching delay. The length of any interruption on PCell due to DL BWP switching of SCell1 and SCell2 shall fulfill requirements in clause 8.2.2.2.5.

Time period T2 starts when the test equipment ceases to schedule the UE on PDSCH in SCell1 and SCell2, thereby causing the *bwp-InactivityTimer* timers for SCell1 and SCell2 to be running until expiry.

Time period T3 starts at the beginning of the first DL half-subframe immediately after the earliest of the *bwp-InactivityTimer* timers expires, in a slot # denoted *n.* The UE shall switch its SCell1 bandwidth part from BWP-2 to BWP-1, and its SCell2 bandwidth part from BWP-4 to BWP-3. The UE shall be able to receive PDSCH in SCell1 and SCell2 starting from the first DL slot that occurs after slot ($n+T_{MultipleBWPswitchDelay}$) as defined in clause 8.6.2B.1, and to transmit ACK/NACKs in SCell1 and SCell2 from the first UL slot that occurs after slot ($n+T_{MultipleBWPswitchDelay}+k1$). The UE shall be continuously scheduled in SCell1 BWP-1 and SCell2 BWP-3 no later than in the first DL slot that occurs after slot ($n+T_{MultipleBWPswitchDelay}$). The starting time of any interruption on PCell due to DL BWP switching of SCell1 and SCell2 shall occur within the BWP switching delay. The length of any interruption on PCell due to DL BWP switching of SCell1 and SCell2 shall fulfill requirements in clause 8.2.2.2.5.

The test equipment verifies the DL BWP switch time by counting the slots from the time when the BWP switch commands are received or *bwp-InactivityTimer* timers expire until ACK/NACKs are sent in SCell1 and SCell2, respectively.

The test equipment verifies that potential interruptions of PCell due to DL BWP switching on SCell1 and SCell2 are carried out within the correct time span, and are within the correct length, by monitoring ACK/NACKs sent in PCell for PCell.

Table A.7.5.6.3.1.1-1: DL BWP switch supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD -TDD duplex mode

Table A.7.5.6.3.1.1-2: General test parameters for DL BWP switch in SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1, 2, 3	Three NR radio channels are used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active SCell1		Cell 2	SCell1 on RF channel number 2.
Active SCell2		Cell 3	SCell2 on RF channel number 3.
CP length		Normal	
DRX		OFF	
sCellDeactivationTimer	ms	---	Same value applies for SCell1 and SCell2. The value infinity is applied.
bwp-InactivityTimer	ms	200	Same value applies for SCell1 and SCell2.
Cell2 timing offset to Cell1	µs	0	Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.
Cell3 timing offset to Cell1	µs	0	
T1	s	0.2	During T1, DCI-based simultaneous BWP switching of SCell1 and SCell2 is carried out.
T2	s	0.2	During T2 bwp-InactivityTimer timers shall run to expiry.
T3	s	0.2	During T3, timer-based simultaneous BWP switching of SCell1 and SCell2 is carried out.

Table A.7.5.6.3.1.1-3: NR Cell specific test parameters for DL BWP switch in SA

Parameter	Unit	Cell 1	Cell 2	Cell 3
Frequency Range		FR2		
NR RF channel		1	2	3
Duplex mode		TDD		
TDD configuration		TDDConf.3.1		
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66		
Active Downlink BWP ID		0	1, 2	3, 4
Downlink initial BWP Configuration		DLBWP.0.2	DLBWP.0.2	DLBWP.0.2
Uplink initial BWP Configuration		ULBWP.0.2	ULBWP.0.2	ULBWP.0.2
Downlink active BWP-0 Configuration		DLBWP.1.1	---	---
Downlink active BWP-1 Configuration		---	DLBWP.1.1	---
Downlink active BWP-2 Configuration		---	DLBWP.1.3	---
Downlink active BWP-3 Configuration		---	---	DLBWP.1.1
Downlink active BWP-4 Configuration		---	---	DLBWP.1.3
Uplink active BWP-0 Configuration		ULBWP.1.1	ULBWP.1.1	ULBWP.1.1
PDSCH Reference measurement channel		SR.3.1 TDD		
TRS configuration		TRS.2.1 TDD		
TCI state		TCI.State.0		

RMSI CORESET parameters		CR.3.1 TDD		
Dedicated CORESET parameters		CCR.3.1 TDD		
OCNG Patterns		OP.1		
SSB Configuration		SSB.3 FR2		
SMTC Configuration		SMTC.1		
EPRE ratio of PSS to SSS	dB	0	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS Note1				
EPRE ratio of OCNG to OCNG DMRS Note1				
Propagation Condition		AWGN	AWGN	AWGN
Correlation Matrix and Antenna Configuration		1x2 Low	1x2 Low	1x2 Low
Note 1: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				

Table A.7.5.6.3.1.1-4: OTA related test parameters for BWP switching test case

Parameter	Unit	Cell 1	Cell 2	Cell 3
Angle of arrival configuration		Setup 1 defined in clause A.3.15.1		
Assumtion for UE beams Note4		Fine	Fine	Fine
Noc Note1	dBm/15kHz	[-111.7]	[-111.7]	[-111.7]
Noc Note1	dBm/SCS	[-102.7]	[-102.7]	[-102.7]
Ês/Noc	dB	[7]	[7]	[7]
SSB-RPNote2	dBm/SCS	[-95.7]	[-95.7]	[-95.7]
Ês/Iot	dB	[7]	[7]	[7]
IoNote3	dBm/95.04 MHz	[-65.9]	[-65.9]	[-65.9]
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 2: SSB-RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 3: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone				
Note 4: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.				

A.7.5.6.3.1.2 Test Requirements

During T1, the UE shall start to send ACK/NACKs in SCell1 and SCell2 from the first UL slot that occurs after the beginning of DL slot ($m+T_{MultipleBWPswitchDelay}+k1$).

During T3, the UE shall start to send ACK/NACKs in SCell1 and SCell2 from the first UL slot that occurs after the beginning of DL slot ($n+T_{MultipleBWPswitchDelay}+k1$).

During T1 and T3, the start of any interruption on PCell due to active BWP switching on SCell1 and SCell2 shall not happen outside the BWP switching delay $T_{MultipleBWPswitchDelay}$, and the length of any interruption shall not exceed the length specified in clause 8.2.2.2.5.

All of the above test requirements shall be fulfilled in order for the observed active BWP switch delays in SCell1 and SCell2 to be considered correct.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.6.4 SCell dormancy switch

A.7.5.6.4.1 NR FR2 PCell SCell dormancy switch of single FR2 SCell inside active time

A.7.5.6.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that the Dormant SCell BWP switch delay requirements are within the requirements stated in section 8.6 for UE configured with a single downlink SCell, when the dormancy indication is received in any of the first 3 OFDM symbols or is received after the first 3 OFDM symbols.

The Supported test configurations are given in Table A.7.5.6.4.1.1-1. The test parameters are given in Tables A.7.5.6.4.1.1-2 and cell-specific parameters in A.7.5.6.4.1.1-3 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A6 is used The test consists of four successive time periods, with duration of T1, T2, T3 and T4, respectively. There are two carriers both in FR2, with one cell on the PCC and 2 cells on SCC. Cell 1, Cell 2 and Cell 3 operate in either FDD or TDD duplex mode according to test configuration. All cells have constant signal levels throughout the test. Before the test starts the UE is connected to Cell 1 (PCell) on radio channel 1 (PCC) with configured and activated SCell (SCell1) on radio channel 2 (SCC1). The UE is not aware of Cell 3 on radio channel 2 (SCC1). The UE is reporting CSI and shall not report CQI index 0 (out-of-range) in the available uplink resources to report CQI for the SCell. The UE shall be continuously scheduled in the PCell throughout the whole test.

The UE receives a DCI-based BWP switch command by which the SCell1 (Cell 2) is requested to switch the active BWP to the dormant BWP.

The point in time at which the DCI message is received at the UE antenna connector, in a subframe # denoted n, defines the start of time period T1. The UE shall accomplish the BWP switch to the dormant BWP latest in subframe ($n + T_{BWPswitchDelay} + X$). The UE shall continue to shall report valid CQI if the UE has available uplink resources to report CQI for the dormant SCell. The UE shall continue to shall report L1-RSRP if the UE has available uplink resources to report L1-RSRP for the Dormant SCell. Any PCell interruption due to BWP switch on the SCell shall occur in the subframes n to ($n+ T_{BWPswitchDelay} + X$).

Time T2 start at T1 + ($T_{BWPswitchDelay} + X$). During T2 the UE shall continue to measure and report CQI and L1-RSRP in the available uplink resources to report CQI and L1-RSRP for the SCell.

Time T3 starts at T2 + 500ms. During T3 the UE shall continue to measure and report CQI and L1-RSRP in the available uplink resources to report CQI and L1-RSRP for the SCell.

Starting at T4 = T3 + 500ms, Cell 3 becomes detectable. During T3 the UE shall continue to measure and report CQI and L1-RSRP in the available uplink resources to report CQI and L1-RSRP for the SCell. The UE shall send one Event A6 triggered measurement report, with a measurement reporting delay less than 1000 ms from the beginning of time period T4. The UE is not required to read the neighbour cell SSB index in this test.

At time T5 starting at T4 + 1500ms a a DCI-based BWP switch command by which the SCell1 (Cell 2) is requested to switch the active BWP to the non-dormant BWP.

The point in time at which the DCI message is received at the UE antenna connector, in a subframe # denoted n, defines the start of time period T6. The UE shall accomplish the BWP switch to the non-dormant BWP latest in subframe (n + $T_{BWPswitchDelay}$ + X). The UE shall continue to shall report valid CQI if the UE has available uplink resources to report CQI for the non-dormant SCell. The UE shall continue to shall report L1-RSRP if the UE has available uplink resources to report L1-RSRP for the non-dormant SCell. Any PCell interruption due to BWP switch on the SCell shall occur in the subframes n to (n+ $T_{BWPswitchDelay}$ + X).

During T2, T3 and T4 the total rate of ACK/NACK feedback loss on any non-dormant serving cell resulting from CQI measurements and RRM measurements, clause 8.2.2.2.12.3, on dormant SCells, shall not exceed [0.5]%.

During T2, T3 and T4 the total rate of ACK/NACK feedback loss on any non-dormant serving cell resulting from L1-RSRP measurements and RRM measurements, clause 8.2.2.2.12.x, on dormant SCells, shall not exceed [0.5]%.

During T2, T3 and T4 the total rate of ACK/NACK feedback loss on any non-dormant serving cell resulting from RRM measurements and RRM measurements, clause 8.2.2.2.12.3, on dormant SCells, shall not exceed [0.5]%

During T1, T2, T3, T4, T5 and T6, the UE shall be continuously scheduled in the SCell1.

Table A.7.5.6.4.1.1-1: Supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.5.6.4.1.1-2: General test parameters for dormancy SCell in NR SA with PCell and SCell in FR2

Parameter	Unit	Test configuration	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
PCell		1	Cell 1				
SCell		1	Cell 2				
Neighbour cell		1	Cell 3				Cell to be identified.
RF Channel Number		1	1				cell 1
RF Channel Number		1	2				Cell 2 and Cell 3
Measurement gap type		1					No measurement gaps configured
SSB configuration		1	SSB.1 FR2				for all cells
SMTC configuration		1	SMTC.1				all cells
CSI-RS parameters		1	CSI-RS.3.2 FDD				
CSI reporting periodicity, Non-dormant BWP	ms		2				
CSI reporting periodicity, Dormant BWP	ms		40				
Timing offset between the cells	ms		0				
Triggering DCI format			1_1	0_1	1_1	0_1	Triggering DCI format
OFDM symbol range in slot for transmission of DCI with dormancy indication			0 – 2		3 – 11		Test1 and Test3 are based on that triggering DCI is received within the first three OFDM symbols of a slot. Test2 and Test4 are based on that the triggering DCI is received after the first three OFDM symbols of a slot
A3-Offset	dB	1	-4.5				
CP length		1	Normal				
Hysteresis	dB	1	0				
Time To Trigger	s	1	0				

Filter coefficient		1	0	L3 filtering is not used
DRX		1	OFF	
T1	s	1	5	
T2	s	1	5	

Table A.7.5.6.4.1.1-3: NR Cell specific test parameters for dormancy SCell in NR SA with PCell and SCell in FR2

Parameter	Unit	Test configuration	Cell 1, Cell 2		Cell 3	
			T1	T2	T1	T2
TDD configuration		1	TDDConf.3.1		TDDConf.3.1	
PDSCH RMC configuration		1	SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET RMC configuration		1	CR.3.1 TDD		CR.3.1 TDD	
Dedicated CORESET RMC configuration, Test 1,2		1	CCR.3.1 TDD		CCR.3.1 TDD	
Dedicated CORESET RMC configuration, Test 3,4			CCR.3.2 TDD		CCR.3.1 TDD	
OCNG Patterns		1	OP.1		OP.1	
TRS configuration		1	TRS.2.1 TDD		N/A	
Downlink initial BWP configuration		1	DLBWP.0.1		N/A	
Uplink initial BWP configuration		1	ULBWP.0.1	N/A	N/A	
Downlink active non-dormant BWP configuration		1	N/A	DLBWP.1.2	N/A	
Downlink active dormant BWP configuration		1	DLBWP.1.2		N/A	
Active UL BWP configuration		1	ULBWP.1.1	N/A	N/A	
RLM-RS		1	CSI-RS		N/A	
EPRE ratio of PSS to SSS	dB		0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						

EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS Note 4						
EPRE ratio of OCNG to OCNG DMRS Note 4						
N_{oc} Note 2	dBm/SCS	1	-98			
N_{oc} Note 2	dBm/15 kHz	1	-98			
$\hat{E}_s / I_{ot}$	dB	1	4	-1.46	-Infinity	-1.46
$\hat{E}_s / N_{oc}$	dB	1	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS kHz	1	-94	-94	-Infinity	-94
Io	dBm/9.36 MHz	1	-64.60	-62.25	--64.60	-62.25
Propagation Condition		1	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: OCNG shall be used such that the cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols

A.7.5.6.4.1.2 Test Requirements

During T1 the UE shall switch to the dormant BWP.

During T2, T3, T4 and T5 the UE shall not send ACK/NACK for the PDSCH data scheduled on the SCell.

During T2, T3, T4 and T5 the UE shall continue to send CSI reports for SCell1 with non-zero CQI index.

During T2, T3, T4 and T5 the UE shall continue to send L1-RSRP reports for SCell.

During T4 the UE shall send one Event A6 triggered measurement report, with a measurement reporting delay less than 1000 ms from the beginning of time period T4.

During T2, T3, T4 and T5, the missing ACK/NACK sent in PCell shall be less than 1.5% of the total number of the expected ACK/NACK.

During T6, the UE shall send ACK/NACK for the PDSCH data scheduled after subframe (n+ $T_{BWPswitchDelay}$ + X) for the SCell1.

All of the above test requirements shall be fulfilled in order for the observed SCell1 BWP switch delays, Pcell interruption rate, correct CSI and L1-RSRP reporting and event triggeres reporting. The rate of correct observed SCell1 hibernation delay, activation delay and SCell1 deactivation delay during repeated tests shall be at least 90%.

A.7.5.6.4.2 NR FR1 PCell SCell dormancy switch of two FR2 SCells outside active time

A.7.5.6.4.2.1 Test Purpose and Environment

The purpose of this test is to verify fulfillment of SCell dormancy switching delay requirements in clause 8.6.2A when the UE is triggered to switch between non-dormancy and dormancy outside DRX active time. In the tested scenario, the UE is connected to PCell in FR1and two SCells in FR2, and the SCells are switched from non-dormancy to dormancy, and vice versa, at a point in time before start of *onDuration*. The UE is configured to monitor PDCCH for DCI format 2_6 at *ps-Offset* before the start of *onDuration*. Two tests are specified, where a UE that only supports triggering within the first three OFDM symbols of a slot shall undergo Test1 only, and a UE that supports triggering also in remaining OFDM symbols of a slot shall undergo both Test1 and Test2. In the tested scenario, *ps-Offset* is selected to correspond to the dormancy switching time specified in clause 8.6.2A.

The supported test configurations are provided in Table A.7.5.6.4.2.1-1 below. General test parameters are provided in Table A.7.5.6.4.2.1-2, and cell-specific parameters are provided in Table A.7.5.6.4.2.1-3 below. OTA-related test parameters are provided in Table A.7.5.6.4.2.1-4.

The tests consist of four consecutive time periods, T1, T2, T3 and T4, respectively.

Three carriers are used in the test. Cell 1 (PCell) is on RF channel 1 (PCC) in FR1, and Cell 2 (SCell1) and Cell 3 (SCell2) are on RF channels 2 (SCC1) and 3 (SCC2) in FR2, respectively. All three cells have constant signal levels throughout the test.

Before the test starts,

- UE is connected to Cell 1 (PCell), Cell 2 (SCell1) and Cell 3 (SCell2).
- UE is configured with a single UE-specific downlink bandwidth part, BWP-0, for Cell 1. BWP-0 includes the bandwidth of the initial DL BWP and SSB.
- UE is configured with one non-dormant and one dormant UE-specific downlink bandwidth part, BWP-0 and BWP-1, respectively, for Cell 2 and Cell 3. BWP-0 includes the bandwidth of the initial DL BWP and SSB.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP in Cell 1 is BWP-0.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP in Cell 2 is BWP-0.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP in Cell 3 is BWP-0.
- UE is configured with DRX.
- UE is configured to monitor DCI format 2_6, and to be active during *onDuration* even when no DCI format 2_6 is detected (*ps-WakeUp*).

Time period T1 starts when the UE at *ps-Offset* before *onDuration* detects a DCI format 2_6 carrying dormancy indication that indicates that SCell1 and SCell2 are to be switched from non-dormancy to dormancy. The UE shall switch active bandwidth parts for SCell1 and SCell2, respectively, from non-dormant BWP-0 to dormant BWP-1. The UE shall complete the switching before the start of *onDuration*. The test equipment schedules the UE continuously with new data indications in PCell starting from beginning of *onDuration*. The test equipment verifies that the UE is transmitting HARQ feedback for PCell from the beginning of *onDuration* and thus verifies that the UE has completed interruptions due to dormancy switching before the start of *onDuration.*

Time period T2 starts when T1 is completed. The test equipment continues to schedule the UE continuously in PCell. The UE shall carry out CSI and RRM measurements on the dormant SCells. The UE shall report ACK/NACK in PCell in response to scheduled PDSCH, with the maximum loss of transmitted ACK/NACKs fulfilling the requirement in clause 8.2.2.2.12. The test equipment verifies that the loss of ACK/NACKs is no larger than 1.5%.

Time period T3 starts when T2 is completed. During T3, the test equipment does not schedule the UE, by which the inactivity timer expires and the UE stops monitoring PDCCH except for signalling using DCI format 2_6 at wake-up signalling occasions.

Time period T4 starts when the UE at *ps-Offset* before *onDuration* detects a DCI format 2_6 carrying dormancy indication that indicates that SCell1 and SCell2 are to be switched from dormancy to non-dormancy. The UE shall switch active bandwidth parts for SCell1 and SCell2, respectively, from dormant BWP-1 to non-dormant BWP-0. The UE shall complete the switching before the start of *onDuration*. The test equipment schedules the UE with new data indication in PCell, SCell1 and SCell2 during *onDuration*. The UE shall receive in PCell, SCell1 and SCell2 and send HARQ feedback for PCell, SCell1 and SCell2 via PCell. The test equipment verifies that the UE is transmitting HARQ feedback for PCell, SCell1 and SCell2 from the beginning of *onDuration*, and thus verifies that the UE has completed interruptions due to dormancy switching before the start of *onDuration*.

Table A.7.5.6.4.2.1-1: Supported test configurations

Config	Description
1	PCell: 15kHz SSB SCS, 10MHz bandwidth, FDD duplex mode SCells: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	PCell: 15kHz SSB SCS, 10MHz bandwidth, TDD duplex mode SCells: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
3	PCell: 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode SCells: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to undergo test for one of the supported test configurations.	

Table A.7.5.6.4.2.1-2: General test parameters

Parameter	Unit	Value		Comment
		Test1	Test2	
NR RF Channel Number		1, 2, 3		Three NR radio channels are used for this test
Active PCell		Cell 1		PCell on RF channel number 1 in FR1
Active SCell1		Cell 2		SCell1 on RF channel number 2 in FR2
Active SCell2		Cell 3		SCell2 on RF channel number 3 in FR2
CSI reporting periodicity, Non-dormant BWP	ms	2		CSI reporting periodicity for periodic reporting of CQI for PCell and non-dormant SCells
CSI reporting periodicity, Dormant BWP	ms	40		CSI reporting periodicity for periodic reporting of CQI for dormant SCells
CP length		Normal		
DRX		DRX.8		For both PCell and SCells. See clause A.3.3.8.
ps-Offset		Depending on UE capability		Monitoring of DCI 2_6 ahead of start of drx-onDurationTimer. Value of ps-Offset shall correspond to SCell dormancy switching time for switching of two SCells, as specified in clause 8.6.2A. Actual value depends on reported UE capabilities.
ps-WakeUp		true		Wake up for onDuration in case DCI format 2_6 is not detected.
Cell 2 timing offset to Cell 1	µs	<24		Timing offset shall be less than MRTD for FR1-FR2 CA, and leave margin for timing difference between Cell2 and Cell3.
Cell 3 timing offset to Cell 2	ns	<260		Timing offset shall be less than MRTD for FR2 intra-band non-contiguous CA.

OFDM symbol range in slot for transmission of DCI with dormancy indication		0 – 2	3 – 11	Test1 is based on that triggering DCI is received within the first three OFDM symbols of a slot.Test2 is based on that the triggering DCI is received later than within the first three OFDM symbols of a slot.
T1	s	0.2		During this time the SCells are switched from non-dormancy to dormancy.
T2	s	10		During this time the SCells are dormant.
T3	s	0.2		During this time the UE is not scheduled in PCell.
T4	s	0.2		During this time the SCells are switched from dormancy to non-dormancy.

Table A.7.5.6.4.2.1-3: Cell specific test parameters

Parameter		Unit	Cell 1	Cell2	Cell 3
Frequency Range			FR1	FR2	FR2
NR RF channel			1	2	3
Duplex mode	Config 1		FDD	TDD	TDD
	Config 2,3		TDD		
TDD configuration	Config 1		---	TDDConf.3.1	TDDConf.3.1
	Config 2		TDDConf.1.1		
	Config 3		TDDConf.2.1		
$BW_{channel}$	Config 1,2	MHz	10: $N_{RB,c}$ = 52	100: $N_{RB,c}$ = 66	100: $N_{RB,c}$ = 66
	Config 3		40: $N_{RB,c}$ = 106		
Downlink initial BWP Configuration			DLBWP.0.2	DLBWP.0.2	DLBWP.0.2
Uplink initial BWP Configuration			ULBWP.0.2	---	---
Downlink active non-dormant BWP-0 Configuration			DLBWP.1.1	DLBWP.1.1	DLBWP.1.1
Downlink active dormant BWP-1 Configuration			---	DLBWP.1.1	DLBWP.1.1
Uplink active BWP-0 Configuration			ULBWP.0.2	---	---
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	SR.3.1 TDD	SR.3.1 TDD
	Config 2		SR.1.1 TDD		
	Config 3		SR.2.1 TDD		
CSI-RS configuration for CSI reporting, Non-dormant BWP	Config 1		CSI-RS.1.1 FDD	CSI-RS.3.1 TDD	CSI-RS.3.1 TDD
	Config 2		CSI-RS.1.1 TDD		
	Config 3		CSI-RS.2.1 TDD		
CSI-RS configuration for CSI reporting, Dormant BWP			---	CSI-RS.3.5 TDD	CSI-RS.3.5 TDD
TRS configuration	Config 1		TRS.1.1 FDD	TRS.2.1 TDD	TRS.2.1 TDD
	Config 2		TRS.1.1 TDD		
	Config 3		TRS.1.2 TDD		
TCI state			TCI.State.0	TCI.State.0	TCI.State.0
RMSI CORESET parameters	Config 1		CR.1.1 FDD	---	---
	Config 2		CR.1.1 TDD		
	Config 3		CR.2.1 TDD		
Dedicated CORESET parameters, Test 1,2	Config 1		CCR.1.1 FDD	CCR.3.1 TDD	CCR.3.1 TDD
	Config 2		CCR.1.1 TDD		
	Config 3		CCR.2.1 TDD		
Dedicated CORESET parameters, Test 3,4	Config 1		CCR.1.5 FDD	CCR.3.1 TDD	CCR.3.1 TDD
	Config 2		CCR.1.5 TDD		
	Config 3		CCR.2.3 TDD		
OCNG Patterns			OP.1	OP.1	OP.1
SSB Configuration	Config 1,2		SSB.1 FR1	SSB.1 FR2	SSB.1 FR2
	Config 3		SSB.2 FR1		

SMTC Configuration		SMTC.1	SMTC.1	SMTC.1
Correlation Matrix and Antenna Configuration		1x2 Low		
EPRE ratio of PSS to SSS	dB	0	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS[Note1]				
EPRE ratio of OCNG to OCNG DMRS[Note1]				
Propagation Condition		N/A Link only, see clause A.3.7A	AWGN	AWGN
Note 1: OCNG shall be used such that the cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				

Table A.7.5.6.4.2.1: OTA related test parameters

Parameter	Unit	Cell 1	Cell 2	Cell 3
Angle of arrival configuration		N/A Link only, see clause A.3.7A	Setup 1 defined in clause A.3.15.1	
Assumtion for UE beams Note6			Fine	Fine
N_{oc} Note1	dBm/15kHz		-112	-112
N_{oc} Note1	dBm/SCS		-103	-103
SS-RSRP[Note2]	dBm/SCS Note3		-85	-85
Ês/Iot	dB		18	18
Io[Note4]	dBm/95.04 MHz Note4		-56	-56
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone				
Note 6: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.				

A.7.5.6.4.2.2 Test Requirements

Starting from *onDuration* in time period T1, the UE shall transmit ACK/NACK in response to scheduling in PCell. There shall be no loss of ACK/NACK.

During time period T2, the UE shall transmit ACK/NACKs in response to scheduling in PCell and the rate of missed ACK/NACKs shall be no more than 1.5%.

Starting from *onDuration* in time period T4, the UE shall transmit ACK/NACK in response to scheduling in PCell, SCell1 and SCell2. There shall be no loss of ACK/NACK.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.6.5 Simultaneous RRC-based Active BWP Switch on multiple CCs

A.7.5.6.5.1 Active BWP switch on multiple SCells with non-DRX in SA

A.7.5.6.5.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement for simultaneous RRC-based BWP switch on multiple CCs defined in clause 8.6.3A.

The supported test configurations are shown in Table A.7.5.6.5.1.1-1. The test scenario comprises one PCell (Cell 1) and one SCell (Cell 2) as given in Table A.7.5.6.5.1.1-2. NR cell-specific parameters are provided in Table A.7.5.6.5.1.1-3, and OTA related test parameters in Table A.7.5.6.5.1.1-4.

PDCCHs indicating new transmissions shall be transmitted in PCell and SCell throughout to ensure that UE sends ACK/NACKs for PDSCH reception in PCell, SCell.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), to Cell 2 (SCell) on radio channel 2 (SCC).
- UE has bandwidth part BWP-1 in its RRC-configuration for Cell1 (PCell), Cell 2 (SCell).
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 of initial condition on Cell1 (PCell), Cell 2 (SCell).

All cells have constant signal levels throughout the test.

The test consists of 1 time period, with duration of T1.

During T1,

Time period T1 starts when a *RRCReconfiguration* with updated bandwidth part configuration in Cell1 and Cell2, sent from the test equipment to the UE, is received at the UE side in PCell's slot # denoted *i*. The UE shall reconfigure its bandwidth part with the updated bandwidth part BWP-1 of final condition in Cell1 and Cell2.

The UE shall be able to receive PDSCH on Cell 1 and Cell 2 at the beginning of the DL slot right after PCell's DL slot ($i+\frac{T_{RRCprocessingDelay}+T_{BWPswitchDelayRRC}+D_{RRC}}{NR\ slot\ length}$) as defined in clause 8.6.3A and be ready for the reception of uplink grant for the PCell no later than at the beginning of the DL slot right after slot ($i+\frac{T_{RRCprocessingDelay}+T_{BWPswitchDelayRRC}+D_{RRC}}{NR\ slot\ length}$). The UE shall be continuously scheduled on Cell 1's BWP-1and Cell 2's BWP-1 starting from the beginning of the DL slot right after slot ($i+\frac{T_{RRCprocessingDelay}+T_{BWPswitchDelayRRC}+D_{RRC}}{NR\ slot\ length}$).

$T_{RRCprocessingDelay}$, $T_{BWPswitchDelayRRC}$ and D_{RRC} are defined in clause 8.6.3A.

The test equipment verifies the DL BWP switch time in Cell 1 and Cell 2 by counting the time from the time when the RRC Reconfiguration message including updated BWP configuration is sent till the time when RRC Reconfiguration Complete message is received.

Table A.7.5.6.5.1.1-1: DL BWP switch supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD -TDD duplex mode

Table A.7.5.6.5.1.1-2: General test parameters for DL BWP switch in SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1, 2, 3	Three NR radio channels are used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active SCell		Cell 2	SCell on RF channel number 2.
CP length		Normal	
DRX		OFF	
Cell2 timing offset to Cell1	µs	0	Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.
T1	s	[0.2]	During T1, RRC-based simultaneous BWP switching of PCell and SCell is carried out.

Table A.7.5.6.5.1.1-3: NR Cell specific test parameters for DL BWP switch in SA

Parameter		Unit	Cell 1	Cell 2
Frequency Range			FR2	
NR RF channel			1	2
Duplex mode			TDD	
TDD configuration			TDDConf.3.1	
$BW_{channel}$		MHz	100: $N_{RB,c}$ = 66	
Active Downlink BWP ID			0	1
Downlink initial BWP Configuration			DLBWP.0.2	DLBWP.0.2
Uplink initial BWP Configuration			ULBWP.0.2	ULBWP.0.2
Initial Condition	Active DL BWP-1 Configuration		DLBWP.1.3	DLBWP.1.3
	Active UL BWP-1 Configuration		ULBWP.1.3	ULBWP.1.3
Final Condition	Active DL BWP-1 Configuration		DLBWP.1.1	DLBWP.1.1
	Active UL BWP-1 Configuration		ULBWP.1.1	ULBWP.1.1
PDSCH Reference measurement channel			SR.3.1 TDD	
TRS configuration			TRS.2.1 TDD	
TCI state			TCI.State.0	
RMSI CORESET parameters			CR.3.1 TDD	
Dedicated CORESET parameters			CCR.3.1 TDD	
OCNG Patterns			OP.1	
SSB Configuration			SSB.3 FR2	
SMTC Configuration			SMTC.1	
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS Note1				

EPRE ratio of OCNG to OCNG DMRS Note1			
Propagation Condition		AWGN	AWGN
Correlation Matrix and Antenna Configuration		1x2 Low	1x2 Low

Note 1: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].

Table A.7.5.6.3.1.1-4: OTA related test parameters for BWP switching test case

Parameter	Unit	Cell 1	Cell 2
Angle of arrival configuration		Setup 1 defined in clause A.3.15.1	
Assumtion for UE beams Note4		Fine	Fine
Noc Note1	dBm/15kHz	[-111.7]	[-111.7]
Noc Note1	dBm/SCS	[-102.7]	[-102.7]
Ês/Noc	dB	[7]	[7]
SSB-RP Note2	dBm/SCS	[-85]	[-85]
Ês/Iot	dB	[18]	[18]
Io Note3	dBm/95.04 MHz	[-56]	[-56]

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SSB-RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: Equivalent power received by an antenna with 0 dBi gain at the center of the quiet zone
Note 4: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.

A.7.5.6.5.1.2 Test Requirements

During T1, the UE shall be ready for the reception of uplink grant for PCell and SCell in the beginning of the DL slot right after slot $(i+\frac{T_{RRC processing Delay}+T_{BWP switch Delay RRC}+D_{RRC}}{NR\ slot\ length})$.

All of the above test requirements shall be fulfilled in order for the observed PCell and SCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.6.5.2 NR FR2-2 Active BWP switch on multiple SCells with non-DRX in SA

A.7.5.6.5.2.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement for simultaneous RRC-based BWP switch on multiple CCs defined in clause 8.6.3A.

The supported test configurations are shown in Table A.7.5.6.5.2.1-1. The test scenario comprises one PCell (Cell 1) and one SCell (Cell 2) as given in Table A.7.5.6.5.2.1-2. NR cell-specific parameters are provided in Table A.7.5.6.5.2.1-3, and OTA related test parameters in Table A.7.5.6.5.2.1-4.

PDCCHs indicating new transmissions shall be transmitted in PCell and SCell throughout to ensure that UE sends ACK/NACKs for PDSCH reception in PCell, SCell.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), to Cell 2 (SCell) on radio channel 2 (SCC).
- UE has bandwidth part BWP-1 in its RRC-configuration for Cell1 (PCell), Cell 2 (SCell).
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 of initial condition on Cell1 (PCell), Cell 2 (SCell).

All cells have constant signal levels throughout the test.

The test consists of 1 time period, with duration of T1.

During T1,

Time period T1 starts when a *RRCReconfiguration* with updated bandwidth part configuration in Cell1 and Cell2, sent from the test equipment to the UE, is received at the UE side in PCell's slot # denoted *i*. The UE shall reconfigure its bandwidth part with the updated bandwidth part BWP-1 of final condition in Cell1 and Cell2.

The UE shall be able to receive PDSCH on Cell 1 and Cell 2 at the beginning of the DL slot right after PCell's DL slot ($i+\frac{T_{RRCprocessingDelay}+T_{BWPswitchDelayRRC}+D_{RRC}}{NR\ slot\ length}$) as defined in clause 8.6.3A and be ready for the reception of uplink grant for the PCell no later than at the beginning of the DL slot right after slot ($i+\frac{T_{RRCprocessingDelay}+T_{BWPswitchDelayRRC}+D_{RRC}}{NR\ slot\ length}$). The UE shall be continuously scheduled on Cell 1's BWP-1and Cell 2's BWP-1 starting from the beginning of the DL slot right after slot ($i+\frac{T_{RRCprocessingDelay}+T_{BWPswitchDelayRRC}+D_{RRC}}{NR\ slot\ length}$).

$T_{RRCprocessingDelay}$, $T_{BWPswitchDelayRRC}$ and D_{RRC} are defined in clause 8.6.3A.

The test equipment verifies the DL BWP switch time in Cell 1 and Cell 2 by counting the time from the time when the RRC Reconfiguration message including updated BWP configuration is sent till the time when RRC Reconfiguration Complete message is received.

Table A.7.5.6.5.2.1-1: DL BWP switch supported test configurations

Configuration	Description
1	NR TDD, SSB SCS 120 kHz, data SCS 120 kHz, BW 100 MHz
2	NR TDD, SSB SCS 480 kHz, data SCS 480 kHz, BW 400 MHz
3	NR TDD, SSB SCS 960 kHz, data SCS 960 kHz, BW 400 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.7.5.6.5.2.1-2: General test parameters for DL BWP switch in SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1, 2	Two NR radio channels are used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active SCell		Cell 2	SCell on RF channel number 2.
CP length		Normal	
DRX		OFF	
Cell2 timing offset to Cell1	µs	0	Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.
T1	s	[0.2]	During T1, RRC-based simultaneous BWP switching of PCell and SCell is carried out.

Table A.7.5.6.5.2.1-3: NR Cell specific test parameters for DL BWP switch in SA

Parameter	Unit	Config	Cell 1	Cell2
Frequency Range		1,2,3	FR2-2	FR2-2
Duplex mode		1,2,3	TDD	
TDD configuration		1	TDDConf.3.1	
		2	TBD	
		3	TBD	
$BW_{channel}$		1	100 MHz: $N_{RB,c}$ = 66	
		2	400 MHz: $N_{RB,c}$ = 66	
		3	400 MHz: $N_{RB,c}$ = 33	
Active BWP ID		1,2,3	0	0
Downlink initial BWP Configuration		1,2,3	DLBWP.0.2	
Uplink initial BWP Configuration		1,2,3	ULBWP.0.2	N.A.
Downlink active BWP-0 Configuration		1,2,3	DLBWP.0.2	N.A.
Downlink active BWP-1 Configuration		1,2,3	N.A.	DLBWP.1.1
Downlink active BWP-2 Configuration		1,2,3	N.A.	DLBWP.1.3
Uplink active BWP-0 Configuration		1,2,3	ULBWP.0.2	N.A.
Uplink active BWP-1 Configuration		1,2,3	N.A.	N.A.
Uplink active BWP-2 Configuration		1,2,3	N.A.	N.A.
PDSCH Reference measurement channel		1	SR.3.1 TDD	
		2	TBD	
		3	TBD	
TRS configuration		1	TRS.2.1 TDD	
		2	TBD	
		3	TBD	
TCI state		1,2,3	TCI.State.0	
RMSI CORESET parameters		1	CR.3.1 TDD	
		2	TBD	
		3	TBD	
		1	CCR.3.1 TDD	

Dedicated CORESET parameters		2	TBD	
		3	TBD	
OCNG Patterns		1,2,3	OP.1	
SSB Configuration		1	SSB.1 FR2	
		2	TBD	
		3	TBD	
SMTC Configuration		1,2,3	SMTC.1	
Correlation Matrix and Antenna Configuration			1x2 Low	
EPRE ratio of PSS to SSS	dB		0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
Propagation Condition			AWGN	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				

Table A.7.5.6.5.2.1-4: OTA related test parameters for BWP switching test case

Parameter	Unit	Config	Cell 1	Cell 2
Angle of arrival configuration		1,2,3	Setup 1 defined in clause A.3.15.1	Setup 1 defined in clause A.3.15.1
Assumtion for UE beams Note 6		1,2,3	Fine	Fine
N_{oc} Note1	dBm/15kHz		-112	-112
N_{oc} Note1	dBm/SCS	1	-103	-103
		2	-97	-97
		3	-94	-94
SS-RSRP Note2	dBm/SCS Note3	1	-85	-85
		2	-79	-79
		3	-76	-76
$\hat{E}_s / I_{ot}$	dB		18	18
Io Note4	dBm/95.04 MHz Note4	1	-56	-56
	dBm/380.16 MHz Note4	2,3	-50.0	-50.0
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				

Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5:	As observed with 0 dBi gain antenna at the centre of the quiet zone.
Note 6:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.

A.7.5.6.5.2.2 Test Requirements

During T1, the UE shall be ready for the reception of uplink grant for PCell and SCell in the beginning of the DL slot right after slot ($i+\frac{T_{RRC processing Delay}+T_{BWP switch Delay RRC}+D_{RRC}}{NR\ slot\ length}$).

All of the above test requirements shall be fulfilled in order for the observed PCell and SCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.7 PSCell addition and release delay

A.7.5.7.1 Addition and Release Delay of known NR PSCell in FR2-2

A.7.5.7.1.1 Test Purpose and Environment

The purpose of this test is to verify the PSCell addition and release delay requirements defined in clauses 8.9.2 and 8.9.3, respectively, for the case where the PSCell is known to the UE at the time of addition.

The supported test configurations are given in Table A.7.5.7.1.1-1. The test scenario comprises two NR cells, Cell 1 and Cell 2, on radio channel 1 in FR1 and radio channel 2 in FR2, respectively. Test parameters are given in Tables A.7.5.7.1.1-2, A.7.5.7.1.1-3 and A.7.5.7.1.1-4 below. The test consists of six time periods with durations T1, T2, T3, T4, T5 and T6, respectively.

At the start of T1, the UE shall be connected to Cell 1 (PCell) on radio channel 1 (PCC) and shall only monitor PCC and hence be unaware of Cell 2 (PSCell-to-be) on radio channel 2. Before the start of T2, the test system shall send measurement control information including measurement gap configuration and event-triggered reporting configuration for measurements on radio channel 2.

During T2, the Cell2 becomes known to the UE. Therefore, during T2 the UE shall report Event triggered report.

The point in time at which the RRC message to release measurement gap is transmitted from the test system defines the start of period T3. During T3, after measurement gap is released, the test system transmits the RRC message to the UE to add PSCell on radio channel 2. The RRC message (to add PSCell) also includes a request for the UE to start periodic CSI reporting for the PSCell after the PSCell has been successfully added.

The point in time at which the RRC message to add PSCell (Cell2) is received at the UE antenna connector defines the start of period T4.

During T4, the UE shall carry out random access towards the PSCell. Reception by the test system of the PRACH preamble defines the start of T5.

During T5, the UE shall send periodic CSI reports in PSCell. After having received at least one such report, the test system shall send a RRC message instructing the UE to release the PSCell. Reception by the UE of the RRC message defines the start of T6.

During T6, the UE shall release the PSCell.

Table A.7.5.7.1.1-1: Supported test configurations for FR2 PSCell

Config	Description

1	FR1 FDD SSB SCS 15kHz BW 10MHz – FR2 TDD SSB SCS 240kHz BW 100MHz
2	FR1 TDD SSB SCS 15kHz BW 10MHz – FR2 TDD SSB SCS 240kHz BW 100MHz
3	FR1 TDD SSB SCS 30kHz BW 40MHz – FR2 TDD SSB SCS 240kHz BW 100MHz
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.7.5.7.1.1-2: General test parameters for PSCell addition and release delay

Parameter		Unit	Value	Comment
RF Channel Number			1, 2	Two radio channels are used for this test
Active PCell			Cell 1	PCell on RF channel number 1 in FR1
Neighbour cell			Cell 2	Neighbour cell (PSCell-to-be) on RF channel number 2 in FR2
A4	Hysteresis	dB	0	Hysteresis for event A4
	Threshold RSRP	dBm	-118	Threshold for event A4
	Time to Trigger	S	0	Time to trigger for event A4
DRX			OFF	For both PCell and PSCell once activated
Measurement gap pattern ID			0	Gaps are configured before T2 and released before T3.
PRACH configuration in Cell 2			FR2 PRACH configuration 2	PRACH configuration as specified in Clause A.3.8.3.2.
CSI reporting periodicity and offset configuration for Cell 2		ms	2	
T1		s	5	During this time the PCell is known and Cell 2 is unknown.
T2		s	1	During this time the UE shall identify neighbour cell 2 and report event B1.
T3		s	3.5	During this time the test system transmits the RRC messages to release measurement gap and add PSCell.
T4		s	1	During this time the UE adds the PSCell.
T5		s	1	During this time the UE sends CSI reports for PSCell.
T6		s	1	During this time the UE releases the PSCell.

Table A.7.5.7.1.1-3: NR Cell specific test parameters for PSCell addition and release delay

Parameter	Unit	Config	Cell 1	Cell2					
				T1	T2	T3	T4	T5	T6
Frequency Range		1,2,3	FR1	FR2					
Duplex mode		1	FDD	TDD					
		2,3	TDD						
TDD configuration		1	–	TDDConf.3.1					
		2	TDDConf.1.1						
		3	TDDConf.2.1						
$BW_{channel}$	MHz	1,2	10: $N_{RB,c}$ = 52	100: $N_{RB,c}$ = 66					
		3	40: $N_{RB,c}$ = 106						
Data RBs allocated		1,2	52	48					
		3	106						
Initial Downlink BWP configuration		1,2,3	DLBWP.0.1	DLBWP.0.1					
Initial Uplink BWP configuration		1,2,3	ULBWP.0.1	ULBWP.0.1					
Dedicated Downlink BWP configuration		1,2,3	DLBWP.1.1	DLBWP.1.1					
Dedicated Uplink BWP configuration		1,2,3	ULBWP.1.1	ULBWP.1.1					
PDSCH Reference Measurement Channel		1	SR.1.1 FDD	SR.3.3 TDD					
		2	SR.1.1 TDD						
		3	SR.2.1 TDD						

TRS configuration		1,2,3	–	TRS.2.1 TDD
TCI state		1,2,3	–	TCI.State.0
RMSI CORESET parameters		1	CR.1.1 FDD	CR.3.2 TDD
		2	CR.1.1 TDD	
		3	CR.2.1 TDD	
Dedicated CORESET parameters		1	CCR.1.1 FDD	CCR.3.7 TDD
		2	CCR.1.1 TDD	
		3	CCR.2.1 TDD	
OCNG Patterns[Note1]		1,2,3	OP.1	OP.3
SSB configuration		1,2	SSB.1 FR1	SSB.2 FR2
		3	SSB.2 FR1	
SMTC configuration		1,2,3	SMTC.2	SMTC.1
PDSCH/PDCCH subcarrier spacing	kHz	1,2	15	120
		3	30	
EPRE ratio of PSS to SSS	dB	1,2,3	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS				
EPRE ratio of OCNG to OCNG DMRS				
Propagation Condition		1,2,3	N/A	AWGN
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Void Note 3: Void Note 4: Void Note 5: Void				

Table A.7.5.7.1.1-4: OTA related test parameters for PSCell addition and release delay

Parameter	Unit	Config	Cell 1	Cell 2					
				T1	T2	T3	T4	T5	T6
Angle of arrival configuration		1,2,3	Link only, see clause A.3.7A	Setup 2a according to clause A.3.15.2.1					
Assumption for UE beams [Note 3]				Rough					
$\hat{E}_s$	dBm/SCS	1,2,3		-∞	-81				
SSB_RP [Note1, Note2]	dBm/SCS	1,2,3		-∞	-81				
$\hat{E}_s / I_{ot}$ BB [Note1, Note 4]	dB	1,2,3		-∞	4.88				
Io [Note 1, Note2]	dBm/95.04 MHz	1,2,3		N/A	-56.41				
Note 1: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 2: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone. Note 3: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation. Note 4: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.									

A.7.5.7.1.2 Test Requirements

The UE shall transmit the PRACH preamble to PSCell at latest 112 ms into T4.

The UE shall transmit at least one periodic CSI report for PSCell during T5.

The UE shall stop transmitting CSI reports for PSCell at latest 20 ms into T6.

All of the above test requirements shall be fulfilled in order for the observed PSCell addition and release delay to be counted as correct. The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.7.2 Addition and Release Delay of unknown NR PSCell in FR2-2

A.7.5.7.2.1 Test Purpose and Environment

The purpose of this test is to verify the PSCell addition and release delay requirements defined in clauses 8.9.2 and 8.9.3, respectively, for the case where the PSCell is unknown to the UE at the time of addition.

The supported test configurations are given in Table A.7.5.7.2.1-1. The test scenario comprises two NR cells, Cell 1 and Cell 2, on radio channel 1 in FR1 and radio channel 2 in FR2, respectively. Test parameters are given in Tables A.7.5.7.2.1-2, A.7.5.7.2.1-3 and A.7.5.7.2.1-4 below. The test consists of four time periods with durations T1, T2, T3 and T4, respectively.

At the start of T1, the UE shall be connected to Cell 1 (PCell) on radio channel 1 (PCC) and shall only monitor PCC and hence be unaware of Cell 2 (PSCell-to-be) on radio channel 2. At the end of T1, the test system shall send a RRC message instructing the UE to add PSCell (Cell 2), and further instructing the UE to report CSI periodically in the PSCell once it has been added. Reception by the UE of this RRC message defines the start of T2.

During T2, the UE shall identify PSCell and carry out random access towards the PSCell. Reception by the test system of the PRACH preamble defines the start of T3.

During T3, the UE shall send periodic CSI reports in PSCell. After having received at least one such report, the test system shall send a RRC message instructing the UE to release the PSCell. Reception by the UE of the RRC message defines the start of T4.

During T4, the UE shall release the PSCell.

Table A.7.5.7.2.1-1: Supported test configurations for FR2 PSCell

Config	Description
1	FR1 FDD SSB SCS 15kHz BW 10MHz – FR2 TDD SSB SCS 240kHz BW 100MHz
2	FR1 TDD SSB SCS 15kHz BW 10MHz – FR2 TDD SSB SCS 240kHz BW 100MHz
3	FR1 TDD SSB SCS 30kHz BW 40MHz – FR2 TDD SSB SCS 240kHz BW 100MHz
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.7.5.7.2.1-2: General test parameters for PSCell addition and release delay

Parameter	Unit	Value	Comment
RF Channel Number		1, 2	Two radio channels are used for this test
Active PCell		Cell 1	PCell on RF channel number 1 in FR1
Neighbour cell		Cell 2	Neighbour cell (PSCell-to-be) on RF channel number 2 in FR2
DRX		OFF	For both PCell and PSCell once activated
PRACH configuration in Cell 2		FR2 PRACH configuration 2	PRACH configuration as specified in Clause A.3.8.3.2.
CSI reporting periodicity and offset configuration for Cell 2	ms	[2]	
T1	s	5	During this time the PCell is known and Cell 2 is unknown.
T2	s	1	During this time the UE adds the PSCell.
T3	s	1	During this time the UE sends CSI reports for PSCell.

T4	s	1	During this time the UE releases the PSCell.

Table A.7.5.7.2.1-3: NR Cell specific test parameters for PSCell addition and release delay

Parameter	Unit	Config	Cell 1	Cell2			
				T1	T2	T3	T4
Frequency Range		1,2,3	FR1	FR2			
Duplex mode		1	FDD	TDD			
		2,3	TDD				
TDD configuration		1	–	TDDConf.3.1			
		2	TDDConf.1.1				
		3	TDDConf.2.1				
$BW_{channel}$	MHz	1,2	10: $N_{RB,c}$ = 52	100: $N_{RB,c}$ = 66			
		3	40: $N_{RB,c}$ = 106				
Data RBs allocated		1,2	52	48			
		3	106				
Initial Downlink BWP configuration		1,2,3	DLBWP.0.1	DLBWP.0.1			
Initial Uplink BWP configuration		1,2,3	ULBWP.0.1	ULBWP.0.1			
Dedicated Downlink BWP configuration		1,2,3	DLBWP.1.1	DLBWP.1.1			
Dedicated Uplink BWP configuration		1,2,3	ULBWP.1.1	ULBWP.1.1			
PDSCH Reference Measurement Channel		1	SR.1.1 FDD	SR.3.3 TDD			
		2	SR.1.1 TDD				
		3	SR.2.1 TDD				
TRS configuration		1,2,3	–	TRS.2.1 TDD			
TCI state		1,2,3	–	TCI.State.0			
RMSI CORESET parameters		1	CR.1.1 FDD	CR.3.2 TDD			
		2	CR.1.1 TDD				
		3	CR.2.1 TDD				
Dedicated CORESET parameters		1	CCR.1.1 FDD	CCR.3.7 TDD			
		2	CCR.1.1 TDD				
		3	CCR.2.1 TDD				
OCNG Patterns[Note1]		1,2,3	OP.1	OP.3			
SSB configuration		1,2	SSB.1 FR1	SSB.2 FR2			
		3	SSB.2 FR1				
SMTC configuration		1,2,3	SMTC.2	SMTC.1			
PDSCH/PDCCH subcarrier spacing	kHz	1,2	15	120			
		3	30				
EPRE ratio of PSS to SSS	dB	1,2,3	0	0			
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS							
EPRE ratio of OCNG to OCNG DMRS							
Propagation Condition		1,2,3	AWGN	AWGN			

Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: Void
Note 4: Void
Note 5: Void

Table A.7.5.7.2.1-4: OTA related test parameters for PSCell addition and release delay

Parameter	Unit	Config	Cell 1	Cell 2			
				T1	T2	T3	T4
Angle of arrival configuration		1,2,3	Link only, see clause A.3.7A	Setup 2a according to clause A.3.15.2.1			
Assumption for UE beams Note 3				Rough			
$\hat{E}s$	dBm/SCS	1,2,3		-∞	-81		
SSB_RP Note1, Note 2	dBm/SCS	1,2,3		-∞	-81		
$\hat{E}_s / I_{ot}$ BB Note1, Note 4	dB	1,2,3		-∞	4.88		
Io Note 1, Note 2	dBm/95.04 MHz	1,2,3		N/A	-56.41		

Note 1: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 2: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone.
Note 3: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 4: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.

A.7.5.7.2.2 Test Requirements

The UE shall transmit the PRACH preamble to PSCell at latest 572 ms into T2.

The UE shall transmit at least one periodic CSI report for PSCell during T3.

The UE shall stop transmitting CSI reports for PSCell at latest 20 ms into T4.

All of the above test requirements shall be fulfilled in order for the observed PSCell addition and release delay to be counted as correct. The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.8 Active TCI state switch delay

A.7.5.8.1 MAC-CE based active TCI state switch

A.7.5.8.1.1 NR PCell FR2 active TCI state switch for a known TCI state

A.7.5.8.1.1.1 Test Purpose and Environment

The purpose of this test is to verify the active TCI state switch delay requirement defined in clause 8.10.3. Supported test configuration is shown in Table A.7.5.8.1.1.1-1.

The test scenario comprises of one NR PCell (Cell 1) as given in Table A.7.5.8.1.1.1-2. Cell-specific parameters of NR PCell are specified in Table A.7.5.8.1.1.1-3 below. The OTA related test parameters for FR2 are shown in Table A.7.5.8.1.1.1-4.

PDCCHs indicating new transmissions shall be sent continuously on PCell to ensure that the UE would have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC).
- UE is configured with 2 different TCI states for PCell, PDCCH TCI state 0 (QCL'd to SSB0) and TCIstate 1 (QCL'd to SSB1), in Cell 1 before starting the test.

- UE is indicated in TCI state 0 as the active PDCCH TCI state

The test consists of two time periods, T1 and T2. Figure A.7.5.8.1.1.1-1 and Figure A.7.5.8.1.1.1-2 show the Time multiplexed (allocation in Frequency is symbolic) downlink transmissions from each Angle of Arrival. During T1 only SSB to which PDCCH-TCI-state0 is QCL'd is transmitted. At the beginning of T2, the SSB corresponding to TCI state 1 starts transmitting. The UE is configured to provide periodic L1-RSRP reports. In slot n which is within 1280ms of UE providing L1-RSRP report with results for both SSB0 and SSB1, UE receives a MAC-CE command indicating a switch to TCI state 1. *tci-PresentInDCI* is not configured in the PDSCH configuration, i.e. TCI state for the PDSCH is identical to the PDCCH TCI state.

The test equipment verifies that UE can be scheduled on PCell on TCI state 0 till n+ T_{HARQ} +3 ms. The test equipment also verifies the TCI state switch time in PCell by scheduling the UE on TCI state 1 after n+ T_{HARQ} +3 ms + ($T_{first\text{-}SSB}$ + $T_{SSB\text{-}proc}$).

Table A.7.5.8.1.1.1-1: Supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.5.8.1.1.1-2: General test parameters for TCI state switch

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
CP length		Normal	
DRX		OFF	
T1	s	0.2	
T2	s	0.2	

Table A.7.5.8.1.1.1-3: NR Cell specific test parameters for TCI state switch

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
$BW_{channel}$		100 MHz: $N_{RB,c}$ = 66
Data RBs allocated		66
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3. 2 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP. 5
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
TCI State 0		TC. State.2
TCI State 1		TCI.State.3
TRS Configuration		TRS.2.1 TDD TRS.2.2 TDD
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		

EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		AWGN
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.		

Table A.7.5.8.1.1.1-4: OTA related test parameters for TCI state switch

Parameter	Unit	Cell 1			
		SSB0		SSB1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.3.15.3			
		AoA1		AoA2	
Assumption for UE beams Note 6		Rough			
$\hat{E}_s$	dBm/SCS	-80.6	-80.6	-Infinity	-80.6
SS B_RP Note 2	dBm/ SCS	-80.6	-80.6	-Infinity	-80.6
$\hat{E}_s / I_{ot}$ BB Note 7	dB	8.3	8.3	-Infinity	8.3
Io Note2	dBm/95.04 MHz Note4	-56.0	-56.0	- Infinity	-56.0

Note 1: Void
Note 2: SS B_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: Void
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the center of the quiet zone.
Note 6: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 7: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

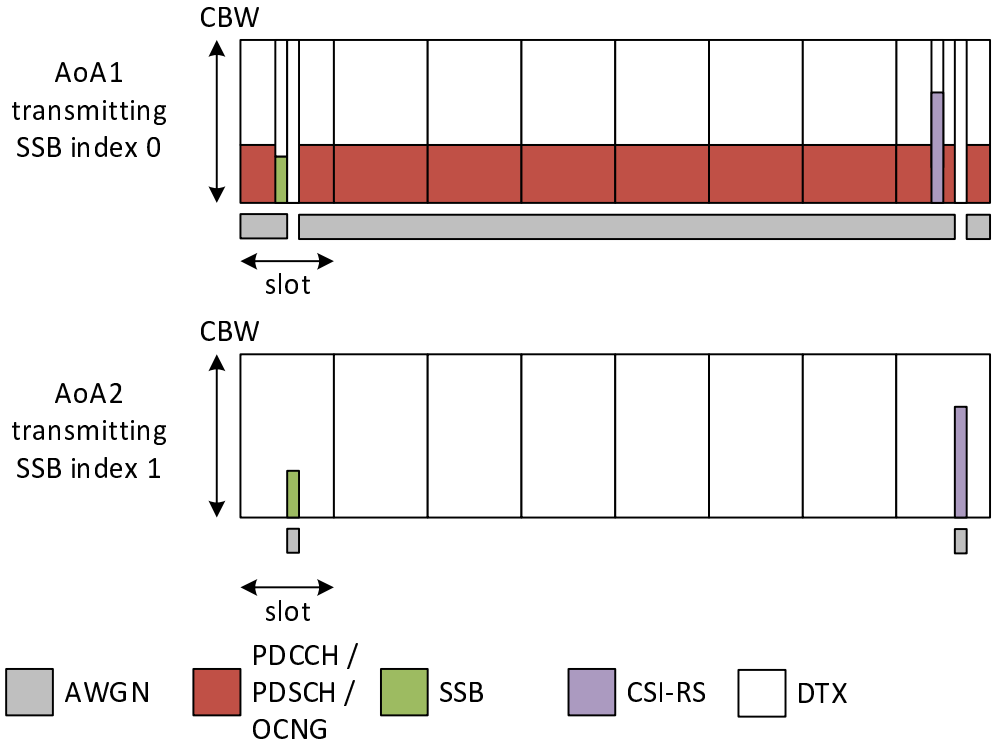

Figure A.7.5.8.1.1.1-1: Time multiplexed downlink transmissions during T1

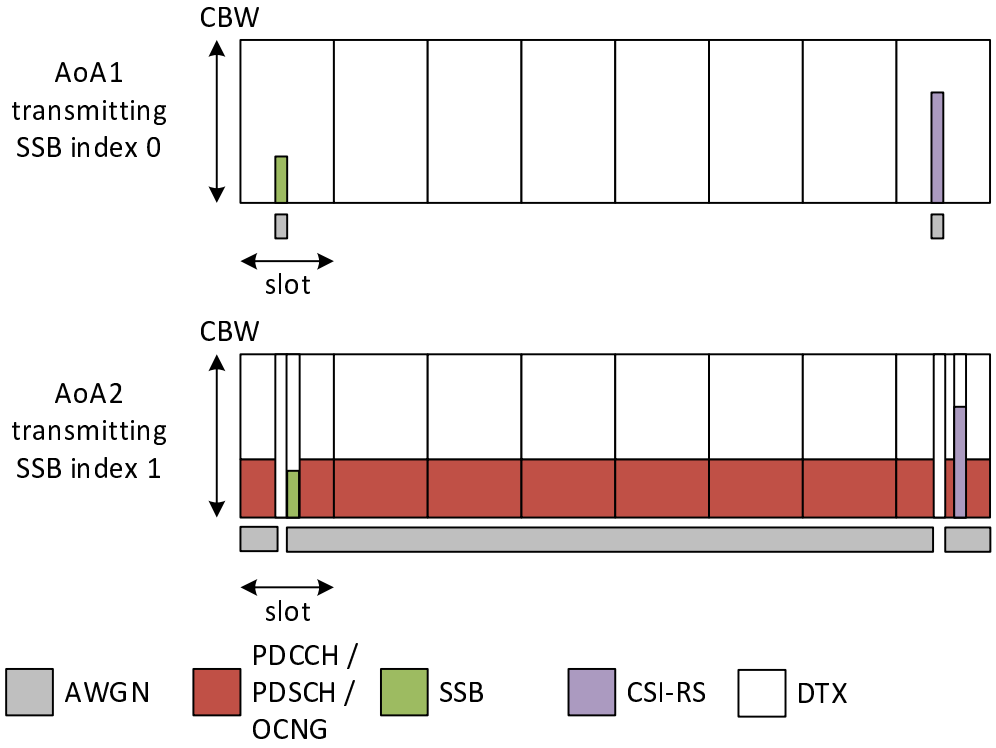

Figure A.7.5.8.1.1.1-2: Time multiplexed downlink transmissions during T2

A.7.5.8.1.1.2 Test Requirements

During T2, UE shall send L1-RSRP report with results for both SSB0 and SSB1.

After receiving MAC-CE command in slot n, UE shall:

- be able to continue to receive on TCI state 0 till n+ T_{HARQ} +3 ms
- be able to start receiving on TCI state 1 after n+ T_{HARQ} +5 ms + $T_{first-SSB}$

A.7.5.8.2 RRC based active TCI state switch

A.7.5.8.2.1 NR PCell FR2 active TCI state switch for a known TCI state

A.7.5.8.2.1.1 Test Purpose and Environment

The purpose of this test is to verify the active TCI state switch delay requirement defined in clause 8.10.3. Supported test configuration is shown in Table A.7.5.8.2.1.1-1.

The test scenario comprises of one NR PCell as given in Table A.7.5.8.2.1.1-2. Cell-specific parameters of NR PCell is specified in Table A.7.5.8.2.1.1-3 below. The OTA related test parameters for FR2 is shown in Table A.7.5.8.2.1.1-4.

PDCCHs indicating new transmissions shall be sent continuously on PCell to ensure that the UE would have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC).
- UE is configured with 1 TCI state for PCell, PDCCH-TCI-state0 (QCL'd to SSB0)
- UE is indicated in TCI state0 as the active TCI state

The test consists of two time periods, T1 and T2. Figure A.7.5.8.2.1.1-1 and Figure A.7.5.8.2.1.1-2 show the Time multiplexed (allocation in Frequency is symbolic) downlink transmissions from each Angle of Arrival. During T1 only SSB to which TCI-state0 is QCL'd is transmitted. At the beginning of T2, the SSB corresponding to TCI-state1 starts transmitting. The UE is configured to provide periodic L1-RSRP reports. In slot n which is within 1280 ms of UE providing L1-RSRP report with results for both SSB0 and SSB1, UE receives a RRC command indicating a switch to TCI-state1.

The test equipment verifies the TCI state switch time in PCell by scheduling the UE on TCI state 1 after n+ $T_{RRC_processing}$ + $T_{first\text{-}SSB}$ + 2ms.

Table A.7.5.8.2.1.1-1: Supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.5.8.2.1.1-2: General test parameters for TCI state switch

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
CP length		Normal	
DRX		OFF	
T1	s	0.2	
T2	s	2	

Table A.7.5.8.2.1.1-3: NR Cell specific test parameters for TCI state switch

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
$BW_{channel}$		100 MHz: $N_{RB,c}$ = 66
Data RBs allocated		66
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3. 2 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP. 5
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
TCI State 0		TC. State.2
TCI State 1		TCI.State.3
reportConfigType		ssb-Index-RSRP
reportConfigType		periodic
Number of reported RS		2
L1-RSRP reporting period	slot	640

timeRestrictionForChannelMeasurements		configured
TRS Configuration		TRS.2.1 TDD TRS.2.2 TDD
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		AWGN
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.		

Table A.7.5.8.2.1.1-4: OTA related test parameters for TCI state switch

Parameter	Unit	Cell 1			
		SSB0		SSB1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.3.15.3			
		AoA1		AoA2	
Assumption for UE beams Note 6		Rough			
$\hat{E}_s$	dBm/SCS	-80.6	-80.6	-Infinity	-80.6
SS B_RP Note 2	dBm/ SCS	-80.6	-80.6	-Infinity	-80.6
$\hat{E}_s/I_{ot}$ BB Note 7	dB	8.3	8.3	-Infinity	8.3
Io Note2	dBm/95.04 MHz Note4	-6.0	-56.0	- Infinity	-56.0

Note 1: Void
Note 2: SS B_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: Void
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the center of the quiet zone.
Note 6: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 7: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

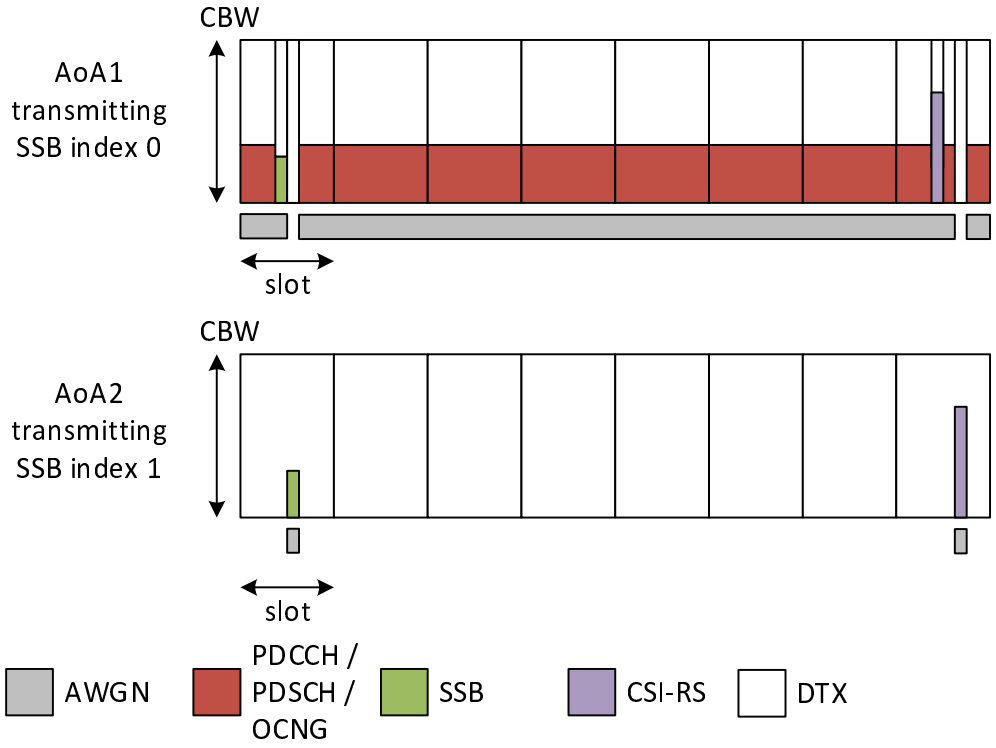

Figure A.7.5.8.2.1.1-1: Time multiplexed downlink transmissions during T1

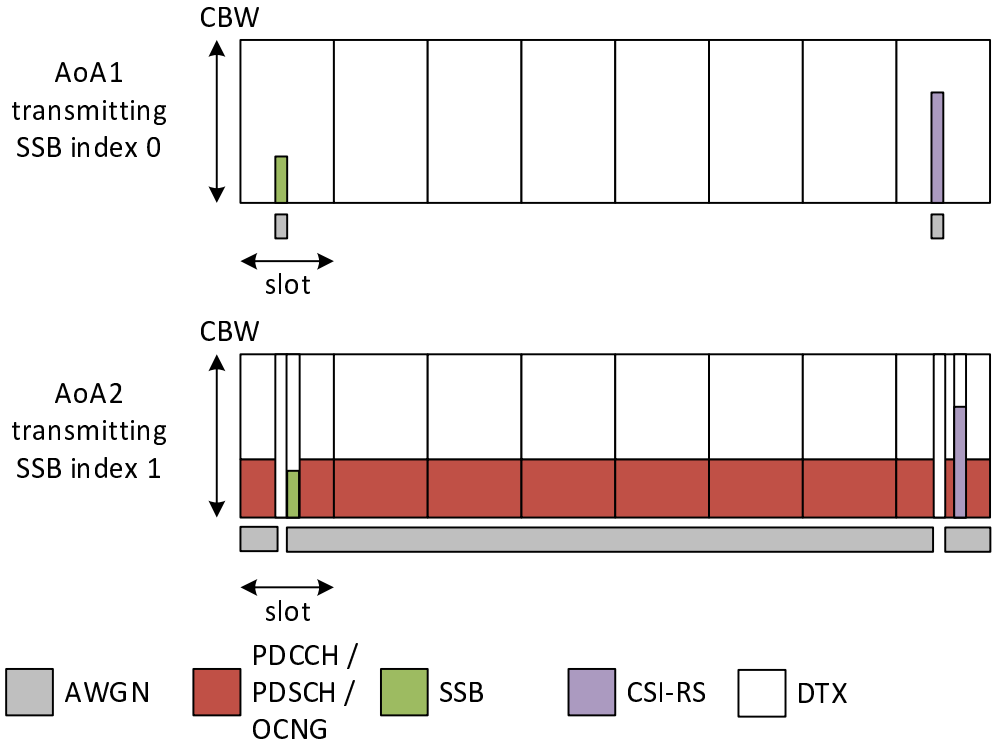

Figure A.7.5.8.2.1.1-2: Time multiplexed downlink transmissions during T2

A.7.5.8.2.1.2 Test Requirements

During T2, UE shall send L1-RSRP report with both SSB0 and SSB1.

After receiving RRC command in slot n, UE shall be able to start receiving on TCI state 1 after n+ $T_{RRC_processing}$ + $T_{first\text{-}SSB}$ + 2ms.

A.7.5.8.3 MAC-CE based active TCI state switch for HST FR2 scenario

A.7.5.8.3.1 NR PCell FR2 HST active TCI state switch for a known TCI state

A.7.5.8.3.1.1 Test Purpose and Environment

The purpose of this test is to verify the active TCI state switch delay requirement defined in clause 8.10.3A for FR2 power class 6 UE. Supported test configuration is shown in Table A.7.5.8.3.1.1-1.Furthermore, the purpose of this test is also to verify the one shot large timing adjustment requirement specified in clause 7.1.2.3 provided *highSpeedMeasFlagFR2-r17* is configured and *highSpeedLargeOneStepUL-TimingFR2-r17* is enabled for UE supporting FR2 power class 6 and *largeOneStepUL-timingFR2-r17* capability.

The test scenario comprises of one NR PCell (Cell 1) as given in Table A.7.5.8.3.1.1-2. Cell-specific parameters of NR PCell are specified in Table A.7.5.8.3.1.1-3 below. The OTA related test parameters for FR2 are shown in Table A.7.5.8.3.1.1-4. During the test, *highSpeedMeasFlagFR2-r17* is configured to be *set2* and broadcast to UE.

PDCCHs indicating new transmissions shall be sent continuously on PCell to ensure that the UE would have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC).
- UE is configured with 2 different TCI states for PCell, PDCCH TCI state 0 (QCL'd to SSB0) and TCI state 1 (QCL'd to SSB1), in Cell 1 before starting the test.
- UE is indicated in TCI state 0 as the active PDCCH TCI state

The test consists of two time periods, T1 and T2. Figure A.7.5.8.3.1.1-1 and Figure A.7.5.8.3.1.1-2 show the Time multiplexed (allocation in Frequency is symbolic) downlink transmissions from each Angle of Arrival. During T1 only SSB to which PDCCH-TCI-state0 is QCL'd is transmitted. At the beginning of T2, the SSB corresponding to TCI state 1 starts transmitting, which has the relative timing delay compared to TCI state 0 by the absolute value of the one-way differential propagation time [$|T_{old} - T_{new}| = 2.33\ \mu s$]. The UE is configured to provide periodic L1-RSRP reports. In slot n which is within 1280ms of UE providing L1-RSRP report with results for both SSB0 and SSB1, UE receives a MAC-CE command indicating a switch to TCI state 1. *tci-PresentInDCI* is not configured in the PDSCH configuration, i.e. TCI state for the PDSCH is identical to the PDCCH TCI state. After the TCI state switch, the UE transmit timing accuracy shall be measured by the test equipment by using the SRS defined in Table A.7.5.8.3.1-5.

The test equipment verifies that

- UE can be scheduled on PCell on TCI state 0 till n+ T_{HARQ} +3 ms.
- the TCI state switch time in PCell by scheduling the UE on TCI state 1 after slot n + T_{HARQ} + 3 ms + $T_{first\text{-}SSB}$ + $T_{SSB\text{-}proc}$ + T_{rs} + $T_{rs\text{-}proc}$.
- the UE transmission timing immediately after TCI state switch shall follow the requirements as specified in clause 7.1.2.3.

Table A.7.5.8.3.1.1-1: Supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.5.8.3.1.1-2: General test parameters for TCI state switch

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
CP length		Normal	
DRX		OFF	
T1	s	0.2	
T2	s	0.2	

Table A.7.5.8.3.1.1-3: NR Cell specific test parameters for TCI state switch

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
$BW_{channel}$		100 MHz: $N_{RB,c}$ = 66
Data RBs allocated		66
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1

Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3. 2 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP. 5
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
TCI State 0		TCI.State.0
TCI State 1		TCI.State.1
TRS Configuration		TRS.2.1 TDD
Correlation Matrix and Antenna Configuration		1x2
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		AOA1: AWGN AOA2: AWGN with 9722 Hz frequency offset
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.		

Table A.7.5.8.3.1.1-4: OTA related test parameters for TCI state switch

Parameter	Unit	Cell 1			
		SSB0		SSB1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.3.15.3			
		AoA1		AoA2	
Assumption for UE beams Note 6		Rough			
$\hat{E}_s$	dBm/SCS	-80.6	-80.6	-Infinity	-80.6
SS B_RP Note 2	dBm/ SCS	-80.6	-80.6	-Infinity	-80.6
$\hat{E}_s / I_{ot}$ BB Note 7	dB	8.3	8.3	-Infinity	8.3
Io Note2	dBm/95.04 MHz Note4	-56.0	-56.0	- Infinity	-56.0

Note 1:	Void
Note 2:	SS B_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	Void
Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5:	As observed with 0dBi gain antenna at the center of the quiet zone.
Note 6:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 7:	Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.6-4.

Table A.7.5.8.3.1.1-5: Sounding Reference Symbol Configuration

Field	Value	Comment
c-SRS	16	Frequency hopping is disabled
b-SRS	0	
b-hop	0	
freqDomainPosition	0	Frequency domain position of SRS
freqDomainShift	0	
groupOrSequenceHopping	neither	No group or sequence hopping
SRS-PeriodicityAndOffset	sl5=0	Once every 5 slots
pathlossReferenceRS	ssb-Index=0	SSB #0 is used for SRS path loss estimation
usage	Codebook	Codebook based UL transmission
startPosition	0	resourceMapping setting. SRS on last symbol of slot, and 1symbols for SRS without repetition.
nrofSymbols	n1	
repetitionFactor	n1	
combOffset-n2	0	transmissionComb setting
cyclicShift-n2	0	
nrofSRS-Ports	port1	Number of antenna ports used for SRS transmission
Note: For further information see clause 6.3.2 in TS 38.331 [2].		

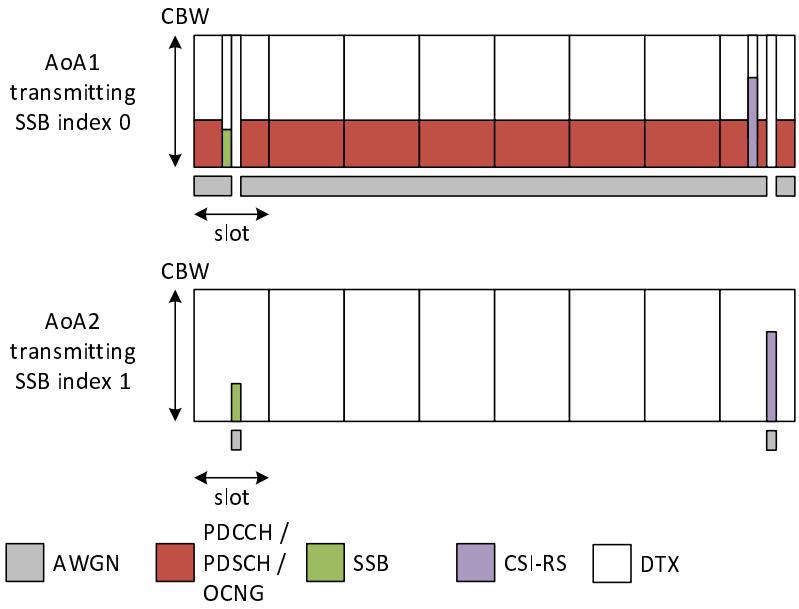

Figure A.7.5.8.3.1.1-1: Time multiplexed downlink transmissions during T1

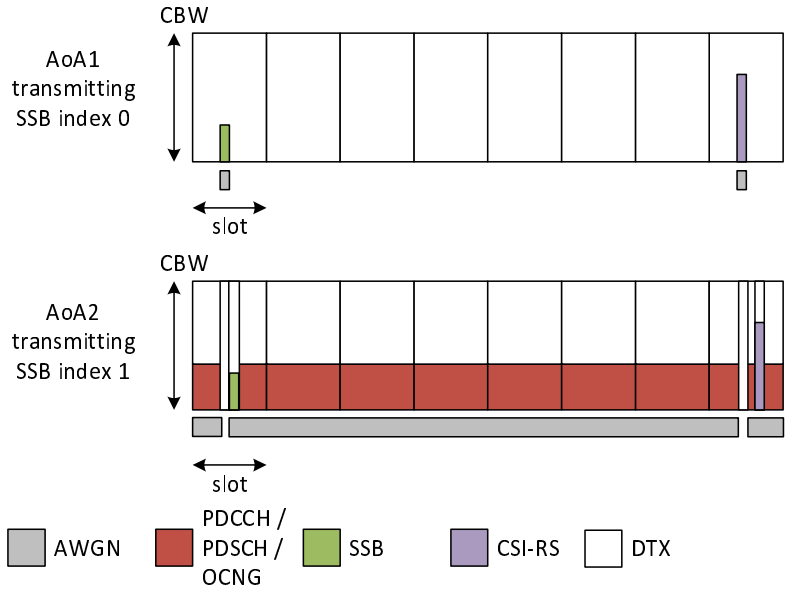

Figure A.7.5.8.3.1.1-2: Time multiplexed downlink transmissions during T2

A.7.5.8.3.1.2 Test Requirements

During T2, UE shall send L1-RSRP report with results for both SSB0 and SSB1.

After the TCI state switch, the UE transmission timing immediately after TCI state switch shall follow the requirements as specified in clause 7.1.2.3.

After receiving MAC-CE command in slot n, UE shall:

- be able to continue to receive on TCI state 0 till n+ T_{HARQ} +3 ms
- be able to start receiving on TCI state 1 after n+ T_{HARQ} +7 ms + $T_{first\text{-}SSB+}$ T_{rs}

A.7.5.9 Uplink spatial relation switch delay

A.7.5.9.1 MAC-CE based Spatial Relation switch

A.7.5.9.1.1 NR PCell FR2 spatial relation associated with known DL-RS

A.7.5.9.1.1.1 Test Purpose and Environment

The purpose of this test is to verify fulfillment of the uplink spatial relation switch delay requirement defined in clause 8.12.3 by a UE capable of beam correspondence without the need for UL beam sweeping. The supported test configurations are shown in Table A.7.5.9.1.1.1-1.

The test scenario comprises one PCell (Cell 1) as outlined in Table A.7.5.9.1.1.1-2. Cell-specific parameters are provided in Table A.7.5.9.1.1.1-3. OTA-related test parameters are provided in Table A.7.5.9.1.1.1-4.

Throughout the test, PDCCH indicating new transmissions shall ge sent continuously on PCell to ensure that the UE will send ACK/NACKs on PUCCH.

Before the test starts,

- UE is connected to Cell 1 on radio channel 1.
- UE is configured with a single TCI state, TCI State-0, which is QCLed with SSB0.
- UE is configured with two spatial relation information configurations Spatial Relation Info-0 and Spatial Relation Info-1 for PUCCH, each associated with SSB0 and SSB1, respectively.
- UE is indicated via MAC-CE activation of *PUCCH-SpatialRelationInfoId* corresponding to Spatial Relation Info-0
- UE is configured with a CSI measurement configuration indicating L1-RSRP measurements on SSB0 and SSB1 with periodic reporting. The L1-RSRP measurement period is influenced by the following: the higher layer parameter *timeRestrictionForChannelMeasurement* is configured, measured SSBs are fully overlapping with SMTC window, and there are no conflicts with measurement gaps.

The test consists of two time periods, T1 and T2. During T1 only the SSB associated with PDCCH TCI state-0 and PUCCH Spatial Relation Info-0 is transmitted. At the beginning of T2, transmission of the SSB associated with PUCCH Spatial Relation Info-1 starts. The UE conducts periodic L1-RSRP measurements and *SSB-Index-RSRP* reporting for SSB0 and SSB1. In slot *n*, which is within 1280ms after UE receiving both SSB0 and SSB1, and after reporting valid results for both the SSB0 and the SSB1, the UE receives a MAC-CE indicating a switch of spatial relation to PUCCH Spatial Relation Info 1.

The test equipment verifies that the UE transmits according to PUCCH Spatial Relation Info 0 up until slot *n* + T_{HARQ}/NR slot length + $3N_{slot}^{subframe,\mu}$, and according to PUCCH Spatial Relation Info 1 from slot *n* + T_{HARQ}/NR slot length + $3N_{slot}^{subframe,\mu}$ + 1 and onwards.

Table A.7.5.9.1.1.1-1: Supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.5.9.1.1.1-2: General test parameters

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
CP length		Normal	
DRX		OFF	
L1-RSRP reporting period	slot	160	Periodic L1-RSRP reporting configured
L1-RSRP measured RS		SSB0, SSB1	L1-RSRP measurements of SSB0 and SSB1.
Number of reported RS		2	L1-RSRP reporting of measurements on SSB0 and SSB1.
T1	s	[0.2]	
T2	s	[2]	

Table A.7.5.9.1.1.1-3: NR Cell specific test parameters

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
$BW_{channel}$		100 MHz: $N_{RB,c}$ = 66
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3.1 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP.1
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
TCI State-0 Configuration		TCI.State.0
reportConfigType		ssb-Index-RSRP
reportConfigType		periodic
timeRestrictionForChannelMeasurements		configured
TRS Configuration		TRS.2.1 TDD
Spatial Relation Info-0 Configuration		PUCCH.SRI.0
Spatial Relation Info-1 Configuration		PUCCH.SRI.1
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS Note 1		
EPRE ratio of OCNG to OCNG DMRS Note 1		
Propagation Condition		AWGN
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		

Table A.7.5.9.1.1.1-4: OTA related test parameters

Parameter	Unit	Cell 1			
		SSB0		SSB1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.3.15.3			
		AoA1		AoA2	
Assumption for UE beams Note 6		Rough			
N_{oc} Note 1	dBm/15 kHz	-92.1			
N_{oc} Note 1	dBm/SCS	-83.1			
$\hat{E}_s/N_{oc}$	dB	1		-infinity	1
SS-RSRP Note 2	dBm/120 kHz Note3	-82.1		-infinity	-82.1
Io Note2	dBm/95.04 MHz Note4	-50.6		-54.1	-50.6

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the center of the quiet zone.
Note 6: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.

A.7.5.9.1.1.2 Test Requirements

During T2, the UE shall send L1-RSRP report with results for SSB0 and SSB1.

After receiving MAC-CE command in slot *n*, the UE shall:

- Continue transmitting using PUCCH spatial relation associated with SSB0 up to and including slot $n + T_{HARQ}$/NR slot length + $3N_{slot}^{subframe,\mu}$
- Start transmitting using PUCCH spatial relation associated with SSB1 from slot $n + T_{HARQ}$/NR slot length + $3N_{slot}^{subframe,\mu} + 1$ and onwards.

The rate of correct events observed during repeated tests shall be at least [90]%.

A.7.5.9.2 RRC based spatial relation switch

A.7.5.9.2.1 NR PCell FR2 spatial relation switch associated with a known DL-RS

A.7.5.9.2.1.1 Test Purpose and Environment

The purpose of this test is to verify the RRC based spatial relation switch delay requirement defined in clause 8.12.5 by a UE capable of beam correspondence without the need for UL beam sweeping. In the test the higher layer parameter *timeRestrictionForChannelMeasurements* is configured. Supported test configuration is shown in Table A.7.5.9.2.1.1-1.

The test scenario comprises of one PCell (Cell 1) as given in Table A.7.5.9.2.1.1-2. Cell-specific parameters of PCell is specified in Table A.7.5.9.2.1.1-3 below. The OTA related test parameters for FR2 is shown in Table A.7.5.9.2.1.1-4.

Periodic SRS is transmitted on PCell (Cell 1), and the SRS configuration is SRSConf.1 given in Table A.5.4.1.1.1-3.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC).
- UE is configured with 1 SRS-SpatialRelation0 associated with SSB0.
- UE is indicated SRS-SpatialRelation0 as the active SRS spatial relation.

The test consists of two time periods, T1 and T2. During T1 only SSB0 to which SRS-SpatialRelation0 associated is transmitted. UE shall transmit periodic SRS with SRS-SpatialRelation0 on the UL of the PCell.

T2 start when the tester initiates transmission of SSB1 corresponding to SRS-SpatialRelation1. The UE is configured to transmit periodic L1-RSRP reports.

In slot n, which is within [1280]ms of UE providing the L1-RSRP report with results for both SSB0 and SSB1, the UE receives an RRC command indicating a switch to transmit periodic SRS with target SRS-SpatialRelation1. The UE shall be able to transmit periodic SRS with target spatial relation (SRS-SpatialRelation1) on PCell in slot n + $T_{RRC_processing}$/NR slot length +1.

Table A.7.5.9.2.1.1-1: Supported test configurations

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.5.9.2.1.1-2: General test parameters for spatial relation switch associated with a known DL-RS

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
CP length		Normal	
DRX		OFF	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
timeRestrictionForChannelMeasurements		configured	Time domain measurement restriction for the channel (signal) measurements (see TS 38.214 [19], clause 5.2.1.1)
T1	s	0.5	
T2	s	1.5	

Table A.7.5.9.2.1.1-3: NR Cell specific test parameters for spatial relation switch associated with a known DL-RS

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
$BW_{channel}$		100 MHz: $N_{RB,c}$ = 66
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1

PDSCH Reference measurement channel		SR.3.1 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP.1
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
SRS-SpatialRelation0		SRS.SRI0
SRS-SpatialRelation1		SRS.SRI1
reportConfigType		ssb-Index-RSRP
reportConfigType		periodic
Number of reported RS		2
L1-RSRP reporting period	slot	160
TRS Configuration		TRS.2.1 TDD
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS (Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		

Table A.7.5.9.2.1.1-4: OTA related test parameters for spatial relation switch associated with a known DL-RS

Parameter	Unit	Cell 1			
		SSB0		SSB1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.3.15.3			
		AoA1		AoA2	
Assumption for UE beams Note 6		Rough		Rough	
N_{oc} Note 1	dBm/15 kHz	-92.1			
N_{oc} Note 1	dBm/SCS	-83.1			
$\hat{E}_s/N_{oc}$	dB	1	1	-Infinity	1
SS-RSRP Note 2	dBm/120 kHz Note3	-82.1	-82.1	-Infinity	-82.1
Io Note2,Note6	dBm/95.04 MHz Note4	-50.6	-50.6	-54.1	-50.6
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone					
Note 5: As observed with 0dBi gain antenna at the center of the quiet zone.					
Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation					

A.7.5.9.2.1.2 Test Requirements

During T1 UE shall send L1-RSRP report with SSB0 to which SRS-SpatialRelation0 is associated. During T2, UE shall send L1-RSRP report with SSB1 to which SRS-SpatialRelation1 is associated.

After receiving RRC command in slot n, UE shall be able to transmit target periodic SRS with SRS-SpatialRelation1 on the PCell in the slot n + $T_{RRC_processing}$/*NR slot length* + 1.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.10 UE specific CBW change

A.7.5.10.1 NR FR2 UE specific CBW change of PCell with non-DRX in SA

A.7.5.10.1.1 Test Purpose and Environment

The purpose of this test is to verify the UE specific CBW change delay requirement defined in clause 8.13. Supported test configurations are shown in Table A.7.5.10.1.1-1.

The test scenario comprises of one PCell (Cell 1) as given in Table A.7.5.10.1.1-2. Cell-specific parameters of PCell are specified in Table A.7.5.10.1.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK transmission.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC).
- UE has bandwidth part BWP-1 in its RRC-configuration for Cell 1 (PCell).
- UE is indicated in firstActiveDownlinkBWP-Id that the active DL BWP is BWP-1 of initial condition in PCell.
- UE has been configured with UE-specific CBW (CBW-1)
- UE is indicated in SCS-SpecificCarrier [2] that the UE-specific CBW is CBW-1 as the initial condition in Cell 1 (PCell).

All cells have constant signal levels throughout the test.

The test consists of 1 time period, with duration of T1.

During T1,

Time period T1 starts when a *RRCReconfiguration* with updated CBW configuration, sent from the test equipment to the UE, is received at the UE side in PCell's slot # denoted *i*. The UE shall reconfigure its CBW with the updated CBW of final condition (CBW-2).

The UE shall be able to completely receive PDSCH on PCell from the first DL slot that occurs after the beginning of DL slot i + $\frac{T_{\text{RRC processing Delay}} + T_{\text{CBW change Delay RRC}}}{\text{NR Slot length}}$ as defined in clause 8.13.2 and starts to report valid ACK/NACK for the PCell from the first UL slot that occurs after the beginning of DL slot i + $\frac{T_{\text{RRC processing Delay}} + T_{\text{CBW change Delay RRC}}}{\text{NR Slot length}}$ + k1. The UE shall be continuously scheduled on PCell's new CBW starting from the first DL slot that occurs after the beginning of DL slot i + $\frac{T_{\text{RRC processing Delay}} + T_{\text{CBW change Delay RRC}}}{\text{NR Slot length}}$.

$T_{RRCprocessingDelay}$ and $T_{CBWchangeDelayRRC}$ are defined in clause 8.13.

The test equipment verifies the UE specific CBW switch time in PCell by counting the time from the time when the RRC Reconfiguration message including updated CBW configurations sent till the time when RRC Reconfiguration Complete message is received.

Table A.7.5.10.1.1-1: UE specific CBW change supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.7.5.10.1.1-2: General test parameters for UE specific CBW change in NR SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
CP length		Normal	
DRX		OFF	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
T1	s	0.2	

Table A.7.5.10.1.1-3: NR Cell specific test parameters for UE specific CBW change in NR SA

Parameter		Unit	Cell 1
Frequency Range			FR2
Duplex mode			TDD
TDD configuration			TDDConf.3.1
$BW_{channel}$			100 MHz: $N_{RB,c}$ = 66
Active DL BWP ID			0
Initial DL BWP Configuration (BWP-1)			DLBWP.0.2
Initial UL BWP Configuration (BWP-1)			ULBWP.0.2
Initial Condition	Active DL CBW Configuration (CBW-1)		DLCBW.1.1
	Active UL CBW Configuration (CBW-1)		ULCBW.1.1
Final Condition	Active DL CBW Configuration (CBW-2)		DLCBW.1.2
	Active UL CBW Configuration (CBW-2)		ULCBW.1.2
'PDSCH Reference measurement channel			SR.3.1 TDD
RMSI CORESET parameters			CR.3.1 TDD
Dedicated CORESET parameters			CCR.3.1 TDD
OCNG Patterns			OP.1
SSB Configuration			SSB.1 FR2
SMTC Configuration			SMTC.1
TCI State			TCI.State.0
TRS Configuration			TRS.2.1 TDD
Antenna Configuration			1x2
Propagation Condition			AWGN
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			

EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.7.5.10.1.1-4: OTA related test parameters for UE specific CBW change test case

Parameter		Unit	Cell 2
Angle of arrival configuration			Setup 1 according to table A.3.15
Assumption for UE beams Note 5			Fine
N_{oc} Note1	NR_TDD_FR2_A	dBm/15kHz	-112
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
N_{oc} Note1	NR_TDD_FR2_A	dBm/SCS	-103
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
SS-RSRP Note2	NR_TDD_FR2_A	dBm/SCS Note3	-85
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
$\hat{E}_s/I_{ot}$		dB	18
Io Note2	NR_TDD_FR2_A	dBm/95.04 MHz Note4	-56
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone

Note 5: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.

A.7.5.10.1.2 Test Requirements

During T1, the UE shall be ready for the reception of uplink grant for PCell from the first DL slot that occurs after the beginning of slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{CBWchangeDelayRRC}}}{\text{NR Slot length}}$ and starts to report valid ACK/NACK for the PCell from the first UL slot that occurs after the beginning of DL slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{CBWchangeDelayRRC}}}{\text{NR Slot length}}$ + k1.

Where, *k1* is the timing between DL data receiving and acknowledgement as specified in [7].

All of the above test requirements shall be fulfilled in order for the observed PCell UE specific CBW change delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.11 UE UL carrier RRC reconfiguration Delay

A.7.5.11.1 UE UL carrier RRC reconfiguration Delay

A.7.5.11.1.1 Test Purpose and Environment

The purpose of this test is to verify that when the UE receives a RRC message implying NR UL carrier configuration, the UE shall be ready to start transmission on the newly configured carrier within the time limits specified in clause 8.4.2 and 8.4.3 for configuring and deconfiguring, respectively. The test will also verify the interruption at UL carrier configuration requirements on PCell in clause 8.2.2.2.4.

There are two cells: FR2 PCell (Cell 1) on NR RF channel 1 and FR2 SCell (Cell 2) on NR RF channel 2. NR uplink is broadcast by *ServingCellConfigCommonSIB*. The test parameters for PCell and SCell are given in Table A.7.5.11.1.1-1, Table A.7.5.11.1.1-2 and Table A.7.5.11.1.1-3 below. The test consists of three time periods, with duration of T1, T2 and T3 respectively. During time duration T1, NR uplink of Cell 2 is not configured to UE. At the start of T2, a NR uplink of Cell 2 is configured to UE through *RRCReconfiguration*, then UE shall start transmission on the NR uplink of Cell 2. At the start of T3, the NR uplink is released through *RRCReconfiguration*.

The test equipment also verifies that potential interruption of PCell due to UL carrier configuration on SCell is carried out within the correct time span and within the correct length by monitoring ACK/NACK sent in PCell.

Table A.7.5.11.1.1-1: Supported test configurations

Configuration	PCell (Cell 1)	SCell (Cell 2)
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode	DL and UL: 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.5.11.1.1-2: General test parameters for SA UE UL carrier RRC reconfiguration Delay for FR2

Parameter	Unit	Test configuration	Value	Comment
RF Channel Number		Config 1	1, 2	Two NR RF channels
Active cell		Config 1	Cell 1: FR2 PCell Cell 2: FR2 SCell	PCell on RF channel number 1 FR2 SCell on RF channel number 2
CP length		Config 1	Normal	
DRX		Config 1	OFF	
Measurement gap pattern Id		Config 1	OFF	

Filter coefficient		Config 1	0	L3 filtering is not used
Cell 2 timing offset to Cell 1	µs	Config 1	3	Synchronous cells.
T1	s	Config 1	5	
T2	s	Config 1	5	
T3	s	Config 1	5	

Table A.7.5.11.1.1-3: NR Cell specific test parameters for SA UE UL carrier RRC reconfiguration Delay for FR2

Parameter		Unit	Test configuration	Cell 1			Cell 2		
				T1	T2	T3	T1	T2	T3
AoA setup			Config 1	Setup 1 as specified in clause A.3.15					
Beam Assumption[Note 7]			Config 1	Rough			Rough		
Frequency Range			Config 1	FR2			FR2		
NR RF Channel Number			Config 1	1			2		
Duplex mode			Config 1	TDD			TDD		
TDD configuration			Config 1	TDDConf.3.1			TDDConf.3.1		
$BW_{channel}$		MHz	Config 1	100: $N_{RB,c}$ = 66			100: $N_{RB,c}$ = 66		
Data RBs allocated			Config 1	66			66		
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1			DLBWP.0.1		
	Initial UL BWP			ULBWP.0.1			ULBWP.0.1		
	Dedicated DL BWP			DLBWP.1.1			DLBWP.1.1		
	Dedicated UL BWP			ULBWP.1.1			ULBWP.1.1		
OCNG Patterns			Config 1	OP.1			OP.1		
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD			SR.3.1 TDD		
CORESET Reference Channel			Config 1	CR.3.1 TDD			CR.3.1 TDD		
SSB configuration			Config 1	SSB.1 FR2			SSB.1 FR2		
SMTC configuration			Config 1	SMTC.1			SMTC.1		
TRS configuration			Config 1	TRS.2.1 TDD			TRS.2.1 TDD		
TCI state			Config 1	TCI.State.0			TCI.State.0		
PUSCH parameters for NR UL carrier			Config 1	N/A			N/A	G-FR2-A3-4 in [13]	N/A
PUCCH parameters for NR UL carriers			Config 1	N/A			N/A	Table 11.3.2.3.1.2-2 in [13]	N/A
EPRE ratio of PSS to SSS			Config 1	0			0		
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									

EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	dBm/15kHz Note5	Config 1	-104.7	-104.7
N_{oc} Note2	dBm/SCS Note4	Config 1	-95.7	-95.7
SS-RSRP Note 3	dBm/SCS Note5	Config 1	-88.7	-88.7
$\hat{E}_s/I_{ot}$	dB	Config 1	7	7
$\hat{E}_s/N_{oc}$	dB	Config 1	7	7
Io Note3	dBm/95.04 MHz Note5	Config 1	-58.92	-58.92
Propagation Condition		Config 1	AWGN	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Void
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.5.11.1.2 Test Requirements

The UE shall be ready to start transmission on the NR uplink carrier on SCell within 20ms from the start of T2.

The UE shall stop the transmission on the NR uplink carrier on SCell within 20ms from the start of T3.

During T2 and T3, the start of interruption of PCell due to UL carrier configuration or de-configuration on SCell shall not happen outside the UL carrier configuration delay which is 20ms in this test, and the length of interruption shall not exceed the length specified in clause 8.2.2.2.4.

All of the above test requirements shall be fulfilled in order for the observed UE UL carrier configuration delay and UE UL carrier release delay to be counted as correct. The rate of correct observed UE UL carrier configuration delay and UE UL carrier release delay during repeated tests shall be at least 90%.

A.7.5.12 Conditional PSCell addition and release delay (FR2 SA)

A.7.5.12.1 Addition and Release Delay of PSCell

A.7.5.12.1.1 Test purpose and environment

The purpose of this test is to verify that the conditional PSCell addition and release delays under SA are within the requirements stated in clause 8.9A.2.

A.7.5.12.1.2 Test Parameters

The supported test configurations are given in Table A.7.5.15.1.2-1. The test scenario comprises two NR cells, Cell 1 and Cell 2, on radio channel 1 in FR1 and radio channel 2 in FR2, respectively. Test parameters are given in Tables A.7.5.15.1.2-2 and A.7.5.15.1.2-3 below. The test consists of four successive time periods, with time durations of T1, T2, T3, T4, respectively.

At the start of time duration T1, the UE does not have any timing information of cell 2. NR shall configure a condition implying addition to cell 2 during T1, at a time earlier than T_{RRC} before the beginning of T2.

At the start of T2, cell 2 becomes detectable and meets the addition condition. Reception by the test system of the PRACH preamble defines the start of T3.

During T3, the UE shall send periodic CSI reports in PSCell. After having received at least one such report, the test system shall send an RRC message instructing the UE to release the PSCell. Reception by the UE of the RRC message defines the start of T4.

During T4, the UE shall release the PSCell.

Table A.7.5.15.1.2-1: Supported test configurations for FR2 PSCell

Config	Description
1	FR1 FDD SSB SCS 15kHz BW 10MHz – FR2 TDD SSB SCS 240kHz BW 100MHz
2	FR1 TDD SSB SCS 15kHz BW 10MHz – FR2 TDD SSB SCS 240kHz BW 100MHz
3	FR1 TDD SSB SCS 30kHz BW 40MHz – FR2 TDD SSB SCS 240kHz BW 100MHz
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.7.5.15.1.2-2: General test parameters for conditional PSCell addition and release delay

Parameter		Unit	Value	Comment
RF Channel Number			1, 2	Two radio channels are used for this test
Active PCell			Cell 1	PCell on RF channel number 1 in FR1
Neighbour cell			Cell 2	Neighbour cell (PSCell-to-be) on RF channel number 2 in FR2
A4	Hysteresis	dB	0	Hysteresis for event A4
	Threshold RSRP	dBm	-118	Threshold for event A4
	Time to Trigger	S	0	Time to trigger for event A4
DRX			OFF	For both PCell and PSCell once activated
Measurement gap pattern ID			0	Gaps are configured before T2 and released before T3.
PRACH configuration in Cell 2			FR2 PRACH configuration 2	PRACH configuration as specified in Clause A.3.8.3.2.
CSI reporting periodicity and offset configuration for Cell 2		ms	2	
T1		s	5	During this time the PCell is known and Cell 2 is unknown.
T2		s	≤7	During this time Cell 2 meets the addition condition and UE adds this PSCell.
T3		s	1	During this time the UE sends CSI reports for Cell 2.
T4		s	1	During this time the UE releases the Cell 2.

Table A.7.5.15.1.2-3: NR Cell specific test parameters for conditional PSCell addition and release delay

Parameter	Unit	Config	Cell 1	Cell2			
				T1	T2	T3	T4
Frequency Range		1,2,3	FR1	FR2			
Duplex mode		1	FDD	TDD			
		2,3	TDD				
TDD configuration		1	–	TDDConf.3.1			
		2	TDDConf.1.1				
		3	TDDConf.2.1				
$BW_{channel}$	MHz	1,2	10: $N_{RB,c}$ = 52	100: $N_{RB,c}$ = 66			
		3	40: $N_{RB,c}$ = 106				
Data RBs allocated		1,2	52	48			
		3	106				
Initial Downlink BWP configuration		1,2,3	DLBWP.0.1	DLBWP.0.1			
Initial Uplink BWP configuration		1,2,3	ULBWP.0.1	ULBWP.0.1			
Dedicated Downlink BWP configuration		1,2,3	DLBWP.1.1	DLBWP.1.1			
Dedicated Uplink BWP configuration		1,2,3	ULBWP.1.1	ULBWP.1.1			
PDSCH Reference Measurement Channel		1	SR.1.1 FDD	SR.3.3 TDD			
		2	SR.1.1 TDD				
		3	SR.2.1 TDD				
TRS configuration		1,2,3	–	TRS.2.1 TDD			
TCI state		1,2,3	–	TCI.State.0			
RMSI CORESET parameters		1	CR.1.1 FDD	CR.3.2 TDD			
		2	CR.1.1 TDD				
		3	CR.2.1 TDD				
Dedicated CORESET parameters		1	CCR.1.1 FDD	CCR.3.7 TDD			
		2	CCR.1.1 TDD				
		3	CCR.2.1 TDD				
OCNG Patterns[Note1]		1,2,3	OP.1	OP.3			
SSB configuration		1,2	SSB.1 FR1	SSB.2 FR2			
		3	SSB.2 FR1				
SMTC configuration		1,2,3	SMTC.2	SMTC.1			
PDSCH/PDCCH subcarrier spacing	kHz	1,2	15	120			
		3	30				
EPRE ratio of PSS to SSS	dB	1,2,3	0	0			
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS							
EPRE ratio of OCNG to OCNG DMRS							
Propagation Condition		1,2,3	N/A	AWGN			
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.							

Table A.7.5.15.1.2-4: OTA related test parameters for conditional PSCell addition and release delay

Parameter	Unit	Config	Cell 1	Cell 2			
				T1	T2	T3	T4
Angle of arrival configuration		1,2,3	Link only, see clause A.3.7A	Setup 2a according to clause A.3.15.2.1			
Assumption for UE beams [Note 3]				Rough			

$\hat{E}s$	dBm/SCS	1,2,3		-∞	-81
SSB_RP Note1, Note2	dBm/SCS	1,2,3		-∞	-81
$\hat{E}_s/I_{ot}$ BB Note1, Note 4	dB	1,2,3		-∞	4.88
Io Note 1, Note2	dBm/95.04 MHz	1,2,3		N/A	-56.41

Note 1: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 2: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone.
Note 3: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 4: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.

A.7.5.12.1.3 Test Requirements

$T_{RRC_delay} + T_{Event_DU}$ occurs during T1 as the addition condition becomes satisfied at the start of T2. The test shall verify that there are no interruptions during T1.

The UE shall start to transmit the PRACH to Cell 2 less than $T_{measure} + T_{UE_preparation} + T_{processing} + T_{\Delta} + T_{PSCell_DU} + 2$ ms = 6720+10+62ms=6792 ms (power class 1) or 4160+10+62ms =4232ms (power classes 2,3 and 4) from the start of T2.

The UE shall transmit at least one periodic CSI report for PSCell during T3.

The UE shall stop transmitting CSI reports for PSCell at latest 20 ms into T4.

All of the above test requirements shall be fulfilled in order for the observed conditional PSCell addition and release delay to be counted as correct. The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.13 Unified TCI state switching delay

A.7.5.13.1 MAC-CE based active joint TCI state switching

A.7.5.13.1.1 NR PCell FR2 active joint TCI state switch for a known TCI state

A.7.5.13.1.1.1 Test Purpose and Environment

The purpose of this test is to verify both active downlink and uplinke TCI state switch delay requirement defined in clause 8.15 and 8.16, respectively, by using joint TCI state of unified TCI state switch framework. In this test, the target TCI state is not in the active TCI state list for PDSCH/PDCCH, and UE is capable of beam correspondence without the need for UL beam sweeping, i.e. *beamCorrespondenceWithoutUL-BeamSweeping* is set to 1. Supported test configuration is shown in Table A.7.5.13.1.1.1-1.

The test scenario comprises of one NR PCell (Cell 1) as given in Table A.7.5.13.1.1.1-2. Cell-specific parameters of NR PCell are specified in Table A.7.5.13.1.1.1-1 below. The OTA related test parameters for FR2 are shown in Table A.7.5.13.1.1.1-2.

Table A.7.5.13.1.1.1-1: Supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.5.13.1.1.1-2: General test parameters for TCI state switch

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
CP length		Normal	
DRX		OFF	
L1-RSRP reporting period	slot	160	Periodic L1-RSRP reporting configured
Number of RS for L1-RSRP reporting		2	Two source RSs in TCI state 0 and 1.
T1	s	0.2	
T2	s	2	

A.7.5.13.1.1.2 Test parameters

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC).
- PDCCHs indicating new transmissions shall be sent continuously on PCell to ensure that the UE would have ACK/NACK sending.
- UE is provided with *dl-OrJoint-TCIStateList-r17* and UE's higher layer signalling *unifiedTCI-StateType-r17* in IE *MIMOParam-r17* is set to *joint*;
- UE is configured with 2 different joint TCI states for PCell, TCI state 0 (QCL'd to SSB0) and TCI state 1 (QCL'd to SSB1), and the TCI state 1 is not in the active TCI state list for PDSCH/PDCCH.
- UE is indicated TCI state 0 as the active PDCCH TCI state

The test consists of two time periods, T1 and T2. During T1 only source RS in TCI state 0 is transmitted. At the beginning of T2, source RS in TCI state 1 start transmitting. The UE is configured to provide periodic L1-RSRP reports. In slot n which is within 1280ms after the slot in which UE provides L1-RSRP report with results for both source RSs in TCI state 0 and 1, UE receives a MAC-CE command indicating a switch to TCI state 1. *tci-PresentInDCI* is not configured in the PDSCH configuration, i.e. TCI state for the PDSCH is identical to the PDCCH TCI state.

The test equipment verifies the following UE behavior for joint TCI state switch:

- UE shall be able to receive and transmit with TCI state 0 until slot slot $n + T_{HARQ} + 3N_{slot}^{subframe,\mu}$, and
- receive and transmit with TCI state 1 from slot $n+T_{HARQ} + 3N_{slot}^{subframe,\mu} + (T_{first_target\text{-}PL\text{-}RS} + 4*T_{target_PL\text{-}RS} +$ 2ms) / *NR slot length*

Table A.7.5.13.1.1.2-1: NR Cell specific test parameters for TCI state switch

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
$BW_{channel}$		100 MHz: $N_{RB,c}$ = 66
Data RBs allocated		66
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2

Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3. 2 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP. 5
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
PL-RS Configuration (CSI-RS#1)		Resource #4 in TRS.2.1 TDD for DLorJoint TCI.State.2 and DLorJoint TCI.State.3
TCI State 0		DLorJoint TCI.State.2
TCI State 1		DLorJoint TCI.State.3
TRS Configuration		TRS.2.1 TDD for DLorJoint TCI.State.2 TRS 2.2 TDD for DLorJoint TCI.State.3
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		AWGN
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.		

Table A.7.5.13.1.1.2-2: OTA related test parameters for TCI state switch

Parameter	Unit	Cell 1			
		Source RS in TCI state 0		Source RS in TCI state 1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.3.15.3			
		AoA1		AoA2	
Assumption for UE beams Note 6		Rough			
$\hat{E}_s$	dBm/SCS	-80.6	-80.6	-Infinity	-80.6
SS B_RP Note 2	dBm/ SCS	-80.6	-80.6	-Infinity	-80.6
$\hat{E}_s / I_{ot\ BB}$ Note 7	dB	8.3	8.3	-Infinity	8.3
Io Note2	dBm/95.04 MHz Note4	-56.0	-56.0	- Infinity	-56.0

Note 1:	Void
Note 2:	SS B_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	Void
Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5:	As observed with 0dBi gain antenna at the center of the quiet zone.
Note 6:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 7:	Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

A.7.5.13.1.1.3 Test Requirements

The test verifies that UE can be scheduled by PCell on TCI state 0 and TCI state 1.

During T2, UE shall send L1-RSRP report with results for source RSs in both TCI state 0 and 1.

After receiving MAC-CE command in slot n, UE shall:

- be able to receive and transmit with TCI state 0 until slot $n + T_{HARQ} + 3N_{slot}^{subframe,\mu}$
- be able to start receiving and transmitting with TCI state 1 after slot $n + T_{HARQ} + 3N_{slot}^{subframe,\mu} + (T_{first_target\text{-}PL\text{-}RS} + 4*T_{target_PL\text{-}RS} + 2ms)$ / *NR slot length*

The rate of correct events observed during repeated tests shall be at least [90]%.

A.7.5.13.2 MAC-CE based active uplink TCI state switch

A.7.5.13.2.1 NR FR2 PCell uplink TCI state switch for a known TCI state

A.7.5.13.2.1.1 Test Purpose and Environment

The purpose of this test is to verify fulfillment of the uplink TCI switch delay requirement defined in clause 8.16.3 by a UE capable of beam correspondence without the need for UL beam sweeping. The test scenario comprises one PCell (Cell 1).

Throughout the test, PDCCH indicating new transmissions shall be sent continuously on PCell to ensure that the UE will send ACK/NACKs on PUCCH.

Before the test starts,

UE is connected to Cell 1 on radio channel 1.

UE is configured with a unified DL TCI state, TCI State-0, and SSB0 is configured as QCL source for the TCI state. At the start of test UE is connected to DL TCI state 0.

UE is configured with 2 UL TCI states, UL TCI state 0 and UL TCI state 1. QCL info to UL TCI state 0 and 1 is provided by SSB0 and SSB1, respectively. Initially only UL TCI 0 is in the active TCI states.

PL-RS is configured for each of the UL TCI states. CSI-RS 0 and CSI-RS 1 are associated with UL TCI state 0 and 1 respectively as PL-RS.

AT the start of the test UE connected to DL TCI state 0 and UL TCI state 0.

Index of CSI-RS#1 is configured for UE as PUSCH-PathlossReferenceRS-Id-r17 which is indicated in TCI-UL-State-r17 of uplink TCI state 1. CSI-RS#1 is QCLed typeD with SSB#1. UE does not maintain CSI-RS#1 as pathloss RS before the uplink TCI state switching.

The test consists of two time periods, T1 and T2. During T1, only the SSB associated with DL TCI state-0 and UL TCI state 0 is transmitted. At the beginning of T2, transmission of the SSB 1 associated with UL TCI state 1 starts. The UE conducts periodic L1-RSRP (i.e., *SSB-Index-RSRP)* reporting for SSB0 and SSB1. In slot *n*, which is within 1280ms after UE receiving both SSB0 and SSB1, and after reporting valid results for both the SSB0 and the SSB1, the UE receives a MAC-CE indicating a TCI state switch to UL TCI state 1.

The test equipment verifies that the UE transmits according to UL TCI state 0 up until slot n + T_{HARQ}/NR slot length + $3N_{slot}^{subframe,\mu}$, and according to UL TCI state 1 from slot n + T_{HARQ}/NR slot length + $3N_{slot}^{subframe,\mu}$ + NM* ($T_{first_target\text{-}PL\text{-}RS}$ + 4*$T_{target_PL\text{-}RS}$ + 2ms and onwards. NM is equal to 1. Where, T_{HARQ} (in ms) is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [3].

A.7.5.13.2.1.2 Test parameters

The supported test configurations are provided in Table A.7.5.13.2.1.2-1.

General test parameters are provided in Table A.7.5.13.2.1.2-2.

Cell-specific parameters are provided in Table A.7.5.13.2.1.2-3.

OTA-related test parameters are provided in Table A.7.5.13.2.1.2-4.

Table A.7.5.13.2.1.2-1: Supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.5.13.2.1.2-2: General test parameters

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
CP length		Normal	
DRX		OFF	
L1-RSRP reporting period	slot	160	Periodic L1-RSRP reporting configured
L1-RSRP measured RS		SSB0, SSB1	L1-RSRP measurements of SSB0 and SSB1.
Number of reported RS		2	L1-RSRP reporting of measurements on SSB0 and SSB1.
T1	s	0.2	
T2	s	2	

Table A.7.5.13.2.1.2-3: NR Cell specific test parameters

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
$BW_{channel}$		100 MHz: $N_{RB,c}$ = 66
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3.1 TDD
RMSI CORESET parameters		CR.3.1 TDD

Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP.1
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
DL TCI State		DLorJoint TCI.State.0
PL-RS Configuration for CSI-RS#0		Resource #4 in TRS.2.1 TDD for UL TCI.State.2
PL-RS Configuration for CSI-RS#1		Resource #4 in TRS.2.2 TDD for UL TCI.State.3
UL TCI State-0 Configuration		UL TCI.State.2
UL TCI State-1 Configuration		UL TCI.State.3
reportConfigType		ssb-Index-RSRP
reportConfigType		periodic
timeRestrictionForChannelMeasurements		configured
TRS Configuration		TRS.2.1 TDD
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS Note 1		
EPRE ratio of OCNG to OCNG DMRS Note 1		
Propagation Condition		AWGN
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		

Table A.7.5.13.2.1.2-4: OTA related test parameters

Parameter	Unit	Cell 1			
		SSB0		SSB1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.3.15.3			
		AoA1		AoA2	
Assumption for UE beams Note 6		Rough			
N_{oc} Note 1	dBm/15 kHz	-92.1			
N_{oc} Note 1	dBm/SCS	-83.1			
$\hat{E}_s/N_{oc}$	dB	1		-infinity	1
SS-RSRP Note 2	dBm/120 kHz Note3	-82.1		-infinity	-82.1
Io Note2	dBm/95.04 MHz Note4	-50.6		-54.1	-50.6
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone					
Note 5: As observed with 0dBi gain antenna at the center of the quiet zone.					
Note 6: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.					

A.7.5.13.2.1.3 Test Requirements

During T2, the UE shall send L1-RSRP report with results for SSB0 and SSB1.

After receiving MAC-CE command in slot *n*, the UE shall:

- Continue transmitting using UL TCI state 0 up to and including slot $n + T_{HARQ}$/NR slot length + $3N_{slot}^{subframe,\mu}$
- Start transmitting using UL TCI state 1, from slot $n + T_{HARQ} + 3N_{slot}^{subframe,\mu} + (T_{first_target\text{-}PL\text{-}RS} + 4*T_{target_PL\text{-}RS} +$ 2ms) / *NR slot length* and onwards.

The rate of correct events observed during repeated tests shall be at least [90]%

A.7.5.13.3 MAC-CE based active downlink TCI state switch

A.7.5.13.3.1 NR PCell FR2 active downlink TCI state switch to cell with additional PCI for a known TCI state

A.7.5.13.3.1.1 Test Purpose and Environment

The purpose of this test is to verify the MAC-CE based active downlink TCI state switch delay requirement defined in clause 8.15.3. Supported test configuration is shown in Table A.7.5.13.3.1.1-1.

Table A.7.5.13.3.1.1-1: Supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

A.7.5.13.3.1.2 Test Parameters

The test scenario comprises of one NR PCell (Cell 1) and one NR cell as the cell with additional PCI (Cell 2), as given in Table A.7.5.13.3.1.2-1. Cell-specific parameters of NR PCell and the cell with additional PCI are specified in Table A.7.5.13.3.1.2-2 below. The OTA related test parameters for FR2 are shown in Table A.7.5.13.3.1.2-3.

PDCCHs indicating new transmissions shall be sent continuously on PCell to ensure that the UE would have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC).
- UE is provided with *dl-OrJoint-TCIStateList-r17* and UE's higher layer signalling *unifiedTCI-StateType-r17* in IE *MIMOParam-r17* is set to *separate.*
- UE is configured with SSB-based L1-RSRP measurements on cell with additional PCI (Cell 2)
- UE is configured with 2 different TCI states for PCell, PDCCH TCI state 0 (QCL'd to TRS resource set 1, TCI state of which is QCLed to SSB0 of Cell1) and TCI state 1 (QCL'd to TRS resource set 2, TCI state of which is QCLed to SSB1 of Cell2), in Cell 1 before starting the test.
- UE is indicated in TCI state 0 as the active PDCCH TCI state

The test consists of two time periods, T1 and T2. Figure A.7.5.13.3.1.2-1 and Figure A.7.5.13.3.1.2-2 show the Time multiplexed (allocation in Frequency is symbolic) downlink transmissions from each Angle of Arrival. During T1 only SSB to which PDCCH-TCI-state0 is QCL'd is transmitted. At the beginning of T2, the SSB corresponding to TCI state 1 starts transmitting. The UE is configured to provide periodic L1-RSRP reports. In slot n which is within 1280ms of UE providing L1-RSRP report with results for both SSB0 of Cell 1 and SSB1 of Cell 2, UE receives a

MAC-CE command indicating a switch to TCI state 1. *tci-PresentInDCI* is not configured in the PDSCH configuration, i.e. TCI state for the PDSCH is identical to the PDCCH TCI state.

The test equipment verifies that UE can be scheduled on PCell on TCI state 0 till n+ T_{HARQ} +3 ms. The test equipment also verifies the TCI state switch time in PCell by scheduling the UE on TCI state 1 after n+ T_{HARQ} +3 ms + ($T_{first\text{-}SSB}$ + $T_{SSB\text{-}proc}$).

Table A.7.5.13.3.1.2-1: General test parameters for TCI state switch

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Cell with additional PCI		Cell 2	
CP length		Normal	
DRX		OFF	
L1-RSRP reporting period	slot	160	Periodic L1-RSRP reporting configured
L1-RSRP measured RS		SSB0 of Cell1, SSB1 of Cell2	L1-RSRP measurements of SSB0 and SSB1.
Number of RS for L1-RSRP reporting		2	Two source RSs in TCI state 0 and 1.
Cell2 timing offset to cell1	us	<CP	
T1	s	0.2	
T2	s	2	

Table A.7.5.13.3.1.2-2: NR Cell specific test parameters for TCI state switch to a cell with additional PCI

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
$BW_{channel}$		100 MHz: $N_{RB,c}$ = 66
Data RBs allocated		66
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3. 2 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP. 5
SSB Configuration		SSB.1 FR2 for SSB0 of Cell 1 and SSB1 of Cell 2
SMTC Configuration		SMTC.1
DL TCI State 0		DLorJoint TCI.State.0
DL TCI State 1		DLorJoint TCI.State.1
TRS Configuration		TRS.2.1 TDD for DLorJoint TCI.State.0 TRS.2.2 TDD for DLorJoint TCI.State.1
Pathloss RS Configuration		Resource #4 in TRS.2.1 TDD
reportQuantity for SSB		ssb-Index-RSRP-Index-r17
reportConfigType for SSB		periodic
Correlation Matrix and Antenna Configuration		1x2 Low

EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		AWGN
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.		

Table A.7.5.13.3.1.2-3: OTA related test parameters for TCI state switch to a cell with additional PCI

Parameter	Unit	Cell 1		Cell 2	
		SSB0		SSB1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.3.15.3			
		AoA1		AoA2	
Assumption for UE beams Note 6		Rough			
$\hat{E}_s$	dBm/SCS	-80.6	-80.6	-Infinity	-80.6
SS B_RP Note 2	dBm/ SCS	-80.6	-80.6	-Infinity	-80.6
$\hat{E}_s / I_{ot}$ BB Note 7	dB	8.3	8.3	-Infinity	8.3
Io Note2	dBm/95.04 MHz Note4	-56.0	-56.0	- Infinity	-56.0
Note 1: Void Note 2: SS B_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: Void Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone Note 5: As observed with 0dBi gain antenna at the center of the quiet zone. Note 6: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation. Note 7: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.					

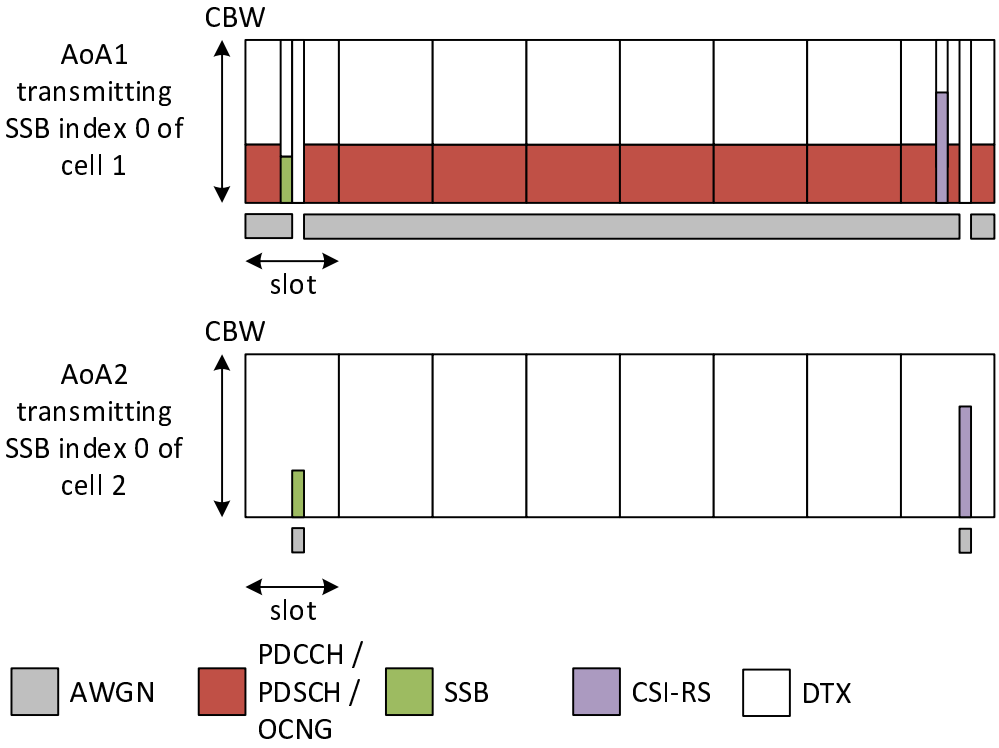

Figure A.7.5.13.3.1.2-1: Time multiplexed downlink transmissions during T1

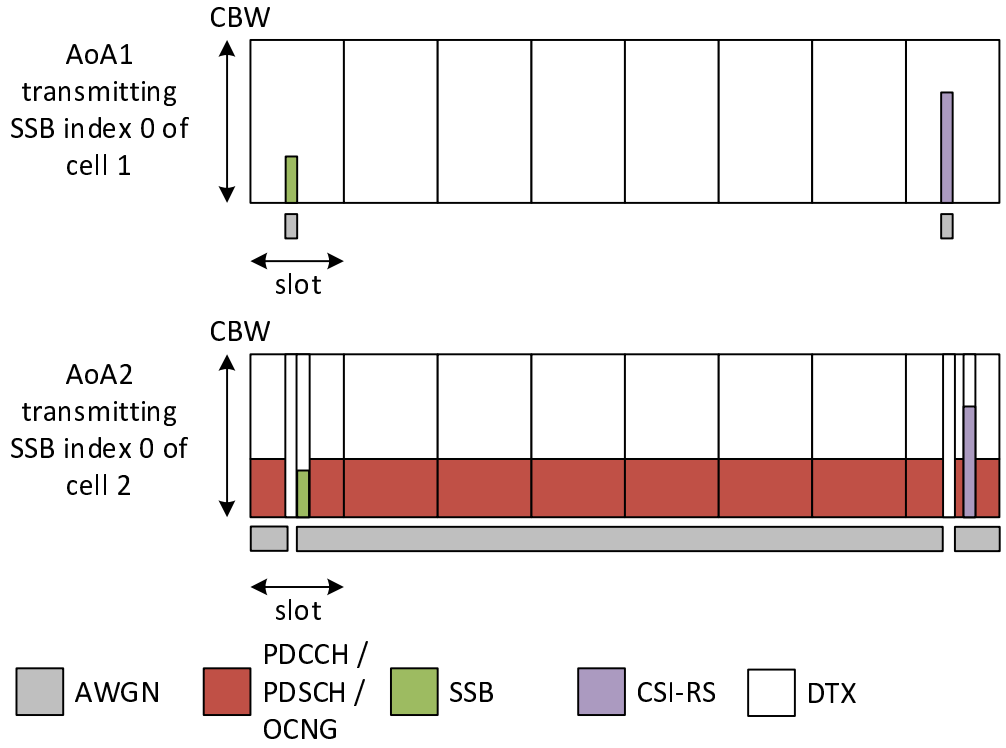

Figure A.7.5.13.3.1.2-2: Time multiplexed downlink transmissions during T2

A.7.5.13.3.1.3 Test Requirements

During T2, UE shall send L1-RSRP report with results for both SSB0 of Cell 1 and SSB1 of Cell 2.

After receiving MAC-CE command in slot n, UE shall:

- be able to continue to receive on DL TCI state 0 till n+ T_{HARQ} +3$N_{slot}^{subframe,\mu}$
- be able to start receiving on DL TCI state 1 after n+ T_{HARQ} + (5 ms + $T_{first\text{-}SSB}$) / *NR slot length*

The rate of correct events observed during repeated tests shall be at least [90]%.

A.7.6 Measurement procedure

A.7.6.1 Intra-frequency Measurements

A.7.6.1.1 SA event triggered reporting test without gap under non-DRX

A.7.6.1.1.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2. Supported test configurations are shown in table A.7.6.1.1.1-1.

Table A.7.6.1.1.1-1: supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.7.6.1.1.1-2, A.7.6.1.1.1-3 and A.7.6.1.1.1-4 below.

In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

Table A.7.6.1.1.1-2: General test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 without gap without DRX

Parameter	Unit	Config	Value	Comment
Active cell		1, 2	PCell (Cell 1)	
Neighbour cell		1, 2	Cell 2	Cell to be identified.
RF Channel Number		1, 2	1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
SMTC configuration		1, 2	SMTC.1	
A3-Offset	dB	1, 2	-11	
CP length		1, 2	Normal	
Hysteresis	dB	1, 2	0	
Time To Trigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX		1, 2	OFF	
Time offset between Cell 1 and Cell 2		1, 2	3 μs	Synchronous cells
T1	s	1, 2	5	
T2	s	1, 2	5	

Table A.7.6.1.1.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 without gap without DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	1, 2	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		1	24		24	
		2	48		48	
Intial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2	SSB		SSB	
PDSCH RMC configuration		1	SR.3.2 TDD		N/A	
		2	SR.3.3 TDD			
RMSI CORESET RMC configuration		1	CR.3.1 TDD		N/A	
		2	CR.3.2 TDD		N/A	
		1	CCR.3.1 TDD		N/A	

Dedicated CORESET RMC configuration		2	CCR.3.7 TDD	N/A
TRS configuration		1, 2	TRS.2.1 TDD	N/A
PDSCH/PDCCH TCI states		1, 2	TCI.State.2	N/A
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	120	120
OCNG Patterns		1, 2	OP.5	N/A
cellIndividualOffset	dB	1~2	N/A	16
SSB		1	SSB.1 FR2	SSB.7 FR2
		2	SSB.2 FR2	SSB.8 FR2
Propagation Condition		1, 2	AWGN	AWGN

Table A.7.6.1.1.1-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 without gap without DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1, 2	Setup 3 defined in A.3.15.3			
			AoA1		AoA2	
Beam assumption[Note 4]		1,2	Rough		Rough	
E_s	dBm/SCS	1	-89	-89	-Infinity	-89
		2	-86	-86	-Infinity	-86
$\hat{E}_s/I_{ot}$ BB Note 5	dB	1, 2	-0.12	-0.12	-Infinity	-0.12
SSB_RP	dBm/SCS	1	-89	-89	-Infinity	-89
		2	-86	-86	-Infinity	-86
Io	dBm/95.04MHz	1	-64.41	-64.41	-Infinity	-64.41
		2	-61.41	-61.41	-Infinity	-61.41
Time multiplexing of the downlink transmissions from each AoA		1, 2	Defined in Figure A.7.6.1.1.1-1			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Void
Note 3: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 5: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

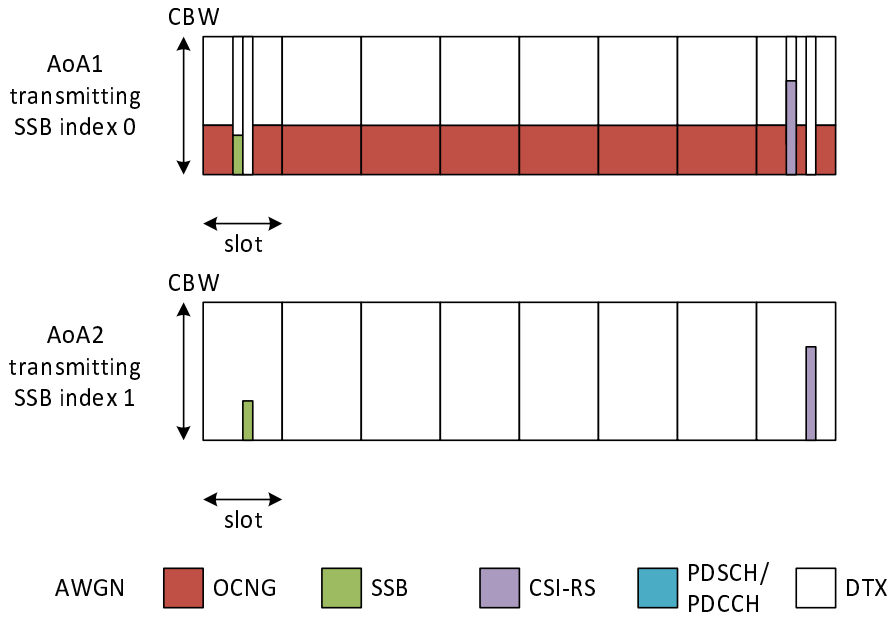

Figure A.7.6.1.1.1-1: Time multiplexed downlink transmissions (Config 1 example)

A.7.6.1.1.2 Test Requirements

In the test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 2.4s for a UE supporting power class 1,
- 1.44s for a UE supporting power class 2, 3 and 4

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.1.2 SA event triggered reporting test without gap under DRX

A.7.6.1.2.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2. Supported test configurations are shown in table A.7.6.1.2.1-1.

Table A.7.6.1.2.1-1: supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.7.6.1.2.1-2 ~ 6.

In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furhtermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.7.6.1.2.1-2: General test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 without gap with DRX

Parameter	Unit	Config	Value		Comment
			Test 1	Test 2	
Active cell		1, 2	PCell (Cell 1)		
Neighbour cell		1, 2	Cell 2		Cell to be identified.
RF Channel Number		1, 2	1: Cell 1 and Cell 2		One TDD carrier frequency is used for the NR cells.
SMTC configuration		1, 2	SMTC.1		
A3-Offset	dB	1, 2	-6		
CP length		1, 2	Normal		
Hysteresis	dB	1, 2	0		
Time To Trigger	s	1, 2	0		
Filter coefficient		1, 2	0		L3 filtering is not used
DRX		1, 2	DRX.1	DRX.7	DRX related parameters are defined in Table A.7.6.1.2.1-5
Time offset between Cell 1 and Cell 2		1, 2	3 μs		Synchronous cells
T1	s	1, 2	5		
T2	s	1, 2	10	52	

Table A.7.6.1.2.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 without gap with DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	1, 2	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		1, 2	66		66	
Intial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2	SSB		SSB	
PDSCH RMC configuration		1	SR.3.2 TDD		N/A	
		2	SR.3.3 TDD			
RMSI CORESET RMC configuration		1	CR.3.1 TDD		N/A	
		2	CR.3.2 TDD		N/A	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD		N/A	
		2	CCR.3.7 TDD		N/A	
TRS configuration		1, 2	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI states		1, 2	TCI.State.2		N/A	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	120		120	
OCNG Patterns		1, 2	OP.1		OP.1	
SSB		1	SSB.3 FR2		SSB.3 FR2	
		2	SSB.4 FR2		SSB.4 FR2	
Propagation Condition		1, 2	AWGN		AWGN	

Table A.7.6.1.2.1-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 without gap with DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1, 2	Setup 1 defined in A.3.15.1			
Beam assumption[Note 4]		1,2	Rough		Rough	
$\hat{E}_s / I_{ot}$ [BB Note 5]	dB	1, 2	3.77	-1.52	-Infinity	-1.52
N_{oc} [Note 2]	dBm/15 KHz	1, 2	-98			
N_{oc} [Note 2]	dBm/SCS	1	-89			
		2	-86			
SSB_RP	dBm/SCS	1	-85	-85	-Infinity	-85
		2	-82	-82	-Infinity	-82
$\hat{E}_s / N_{oc}$	dB	1, 2	4	4	-Infinity	4
Io	dBm/95.04MHz	1, 2	-54.53	-52.18	See Cell 1 columns	

Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.
Note 5:	Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

Table A.7.6.1.2.1-5: Void

Table A.7.6.1.2.1-6: Void

A.7.6.1.2.2 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 7.2s for a UE supporting power class 1,
- 4.32s for a UE supporting power class 2, 3 and 4

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 51.2s for a UE supporting power class 1,
- 30.72s for a UE supporting power class 2, 3 and 4

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.1.3 SA event triggered reporting test with per-UE gaps under non-DRX

A.7.6.1.3.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2. Supported test configurations are shown in table A.7.6.1.3.1-1.

Table A.7.6.1.3.1-1: supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.7.6.1.3.1-2 ~ 4 below.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

Table A.7.6.1.3.1-2: General test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 with per-UE gaps without DRX

Parameter	Unit	Config	Value	Comment
Active cell		1, 2	PCell (Cell 1)	
Neighbour cell		1, 2	Cell 2	Cell to be identified.
RF Channel Number		1, 2	1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
Gap type		1, 2	Per-UE gaps	
Measurement gap repitition periodicity	ms	1, 2	40	
Measurement gap length	ms	1, 2	6	
Measurement gap offset	ms	1, 2	39	
SMTC configuration		1, 2	SMTC.1	
CSI-RS parameters		1, 2	CSI-RS.3.2 TDD resource #0	Resource #1 is not used
A3-Offset	dB	1, 2	-11	
CP length		1, 2	Normal	
Hysteresis	dB	1, 2	0	
Time To Trigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX		1, 2	OFF	
Time offset between Cell 1 and Cell 2		1, 2	3 μs	Synchronous cells
T1	s	1, 2	5	
T2	s	1, 2	5	

Table A.7.6.1.3.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 with per-UE gaps without DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	1, 2	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		1	24		24	
		2	48		48	
Intial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2	DLBWP.1.2		DLBWP.1.1	
Active UL BWP configuration		1, 2	ULBWP.1.2		ULBWP.1.1	
RLM-RS		1, 2	CSI-RS		SSB	
PDSCH RMC configuration		1	SR.3.2 TDD		N/A	
		2	SR.3.3 TDD			
RMSI CORESET RMC configuration		1	CR.3.1 TDD		N/A	
		2	CR.3.2 TDD		N/A	

Dedicated CORESET RMC configuration		1	CCR.3.1 TDD	N/A
		2	CCR.3.7 TDD	N/A
TRS configuration		1, 2	TRS.2.1 TDD	N/A
PDSCH/PDCCH TCI states		1, 2	TCI.State.2	N/A
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	120	120
OCNG Patterns		1, 2	OP.5	N/A
cellIndividualOffset	dB	1~2	N/A	16
SSB		1	SSB.3 FR2	SSB.7 FR2
		2	SSB.4 FR2	SSB.8 FR2
Propagation Condition		1, 2	AWGN	AWGN

Table A.7.6.1.3.1-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 with per-UE gaps without DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1, 2	Setup 3 defined in A.3.15.3			
			AoA1		AoA2	
Beam Assumption[Note 4]		1,2	Rough		Rough	
E_s	dBm/SCS	1	-89	-89	-Infinity	-89
		2	-86	-86	-Infinity	-86
$\hat{E}_s / I_{ot}$ BB Note 5	dB	1, 2	-0.12	-0.12	-Infinity	-0.12
SSB_RP	dBm/SCS	1	-89	-89	-Infinity	-89
		2	-86	-86	-Infinity	-86
Io	dBm/95.04MHz	1	-64.41	-64.41	-Infinity	-64.41
		2	-61.41	-61.41	-Infinity	-61.41
Time multiplexing of the downlink transmissions from each AoA		1	Defined in Figure A.7.6.1.3.1-1			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Void
Note 3: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 5: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

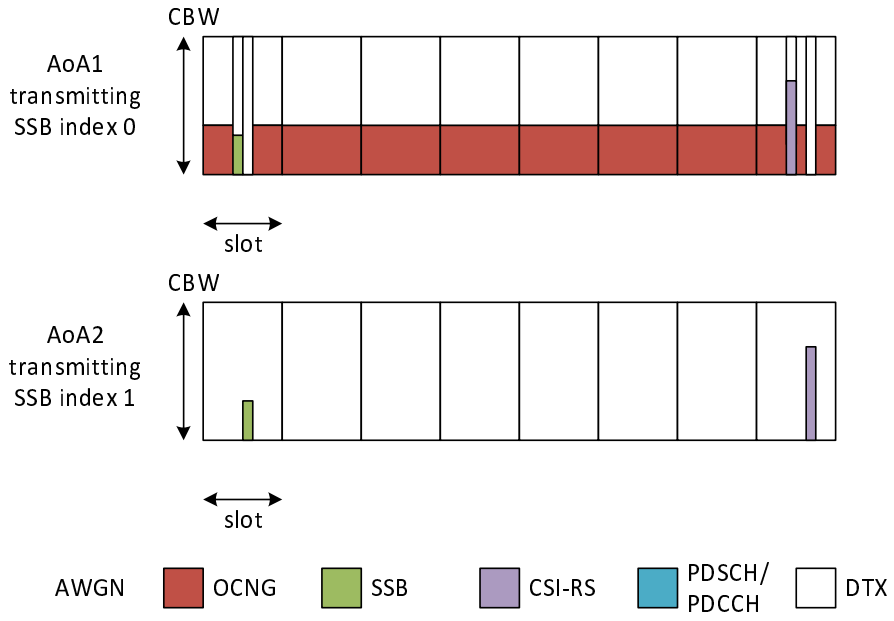

Figure A.7.6.1.3.1-1: Time multiplexed downlink transmissions (Config 1 example)

A.7.6.1.3.2 Test Requirements

In the test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 3.2s for a UE supporting power class 1,
- 1.92s for a UE supporting power class 2, 3 and 4

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.1.4 SA event triggered reporting test with per-UE gaps under DRX

A.7.6.1.4.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2. Supported test configurations are shown in table A.7.6.1.4.1-1.

Table A.7.6.1.4.1-1: supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.7.6.1.4.1-2, A.7.6.1.4.1-3 and A.7.6.1.4.1-4 below.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furhtermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.7.6.1.4.1-2: General test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 with per-UE gaps with DRX

Parameter	Unit	Config	Value		Comment
			Test 1	Test 2	
Active cell		1, 2	PCell (Cell 1)		
Neighbour cell		1, 2	Cell 2		Cell to be identified.
RF Channel Number		1, 2	1: Cell 1 and Cell 2		One TDD carrier frequency is used for the NR cells.
Gap type		1, 2	Per-UE gaps		
Measurement gap repitition periodicity	ms	1, 2	40		
Measurement gap length	ms	1, 2	6		
Measurement gap offset	ms	1, 2	39		
SMTC configuration		1, 2	SMTC.1		
CSI-RS parameters		1, 2	CSI-RS.3.2 TDD resource #0		Resource #1 is not used
A3-Offset	dB	1, 2	-6		
CP length		1, 2	Normal		
Hysteresis	dB	1, 2	0		
Time To Trigger	s	1, 2	0		
Filter coefficient		1, 2	0		L3 filtering is not used
DRX		1, 2	DRX.1	DRX.7	DRX related parameters are defined in Table A.7.6.1.2.1-5
Time offset between Cell 1 and Cell 2		1, 2	3 μs		Synchronous cells
T1	s	1, 2	5		
T2	s	1, 2	10	52	

Table A.7.6.1.4.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 with per-UE gaps with DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	1, 2	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		1, 2	66		66	
Intial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	

Active DL BWP configuration		1, 2	DLBWP.1.2	DLBWP.1.1
Active UL BWP configuration		1, 2	ULBWP.1.2	ULBWP.1.1
RLM-RS		1, 2	SCSI-RS	SSB
PDSCH RMC configuration		1	SR.3.2 TDD	N/A
		2	SR.3.3 TDD	
RMSI CORESET RMC configuration		1	CR.3.1 TDD	N/A
		2	CR.3.2 TDD	N/A
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD	N/A
		2	CCR.3.7 TDD	N/A
TRS configuration		1, 2	TRS.2.1 TDD	N/A
PDSCH/PDCCH TCI state		1, 2	TCI.State.2	N/A
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	120	120
OCNG Patterns		1, 2	OP.1	OP.1
SSB		1	SSB.3 FR2	SSB.3 FR2
		2	SSB.4 FR2	SSB.4 FR2
Propagation Condition		1, 2	AWGN	AWGN

Table A.7.6.1.4.1-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 with per-UE gaps with DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1, 2	Setup 1 defined in A.3.15.1			
Beam Assumption Note 4		1,2	Rough			
$\hat{E}_s/I_{ot}$ BB Note 5	dB	1, 2	3.77	-1.52	-Infinity	-1.52
N_{oc} Note 2	dBm/15 KHz	1, 2	-98			
N_{oc} Note 2	dBm/SCS	1	-89			
		2	-86			
SSB_RP	dBm/SCS	1	-85	-85	-Infinity	-85
		2	-82	-82	-Infinity	-82
$\hat{E}_s/N_{oc}$	dB	1, 2	4	4	-Infinity	4
Io	dBm/95.04MHz	1,2	-54.53	-52.18	See Cell 1 columns	

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Note 5: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

Table A.7.6.1.4.1-5: Void

Table A.7.6.1.4.1-6:Void

A.7.6.1.4.2 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 7.2s for a UE supporting power class 1,
- 4.32s for a UE supporting power class 2, 3 and 4

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 51.2s for a UE supporting power class 1,
- 30.72s for a UE supporting power class 2, 3 and 4

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.1.5 SA event triggered reporting test without gap under non-DRX for UE configured with *highSpeedMeasCA-Scell-r17*

A.7.6.1.5.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements for FR2 power class 6 UE configured with *highSpeedMeasFlagFR2-r17* in clause 9.2.5.1 and 9.2.5.2. Supported test configurations are shown in table A.7.6.1.5.1-1.

Table A.7.6.1.5.1-1: supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.7.6.1.5.1-2, A.7.6.1.5.1-3 and A.7.6.1.5.1-4 below.

In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

Table A.7.6.1.5.1-2: General test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 without gap without DRX

Parameter	Unit	Config	Value	Comment
highSpeedMeasFlagFR2-r17		1,2	Set2	*highSpeedMeasFlagFR2-r17* = set2 is configured
Active cell		1, 2	PCell (Cell 1)	
Neighbour cell		1, 2	Cell 2	Cell to be identified.
RF Channel Number		1, 2	1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
SMTC configuration		1, 2	SMTC.1	
A3-Offset	dB	1, 2	-11	
CP length		1, 2	Normal	
Hysteresis	dB	1, 2	0	
Time To Trigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX		1, 2	OFF	
Time offset between Cell 1 and Cell 2		1, 2	3 μs	Synchronous cells
T1	s	1, 2	[1]	
T2	s	1, 2	[2]	

Table A.7.6.1.5.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 without gap without DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	1, 2	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		1	24		24	
		2	48		48	
Intial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2	SSB		SSB	
PDSCH RMC configuration		1	SR.3.2 TDD		N/A	
		2	SR.3.3 TDD			
RMSI CORESET RMC configuration		1	CR.3.1 TDD		N/A	
		2	CR.3.2 TDD		N/A	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD		N/A	
		2	CCR.3.7 TDD		N/A	
TRS configuration		1, 2	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI states		1, 2	TCI.State.2		N/A	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	120		120	
OCNG Patterns		1, 2	OP.5		N/A	
cellIndividualOffset	dB	1~2	N/A		16	
SSB		1	SSB.1 FR2		SSB.7 FR2	
		2	SSB.2 FR2		SSB.8 FR2	
Propagation Condition		1, 2	AWGN		AWGN 19444Hz Note 1	

Note 1: The AWGN 19444 Hz condition is a non fading propagation channel with one tap. Doppler shift is a constant 19444 Hz.

Table A.7.6.1.5.1-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 without gap without DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1, 2	Setup [x] defined in A.3.15.3			
			AoA1		AoA2	
Beam assumption Note 4		1,2	Rough		Rough	
E_s	dBm/SCS	1	-89	-89	-Infinity	-89
		2	-86	-86	-Infinity	-86
$\hat{E}_s/I_{ot}$ BB Note 5	dB	1, 2	-0.12	-0.12	-Infinity	-0.12
SSB_RP	dBm/SCS	1	-89	-89	-Infinity	-89
		2	-86	-86	-Infinity	-86
Io	dBm/95.04MHz	1	-64.41	-64.41	-Infinity	-64.41
		2	-61.41	-61.41	-Infinity	-61.41
Time multiplexing of the downlink transmissions from each AoA		1, 2	Defined in Figure A.7.6.1.1.1-1			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Void
Note 3: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 5: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

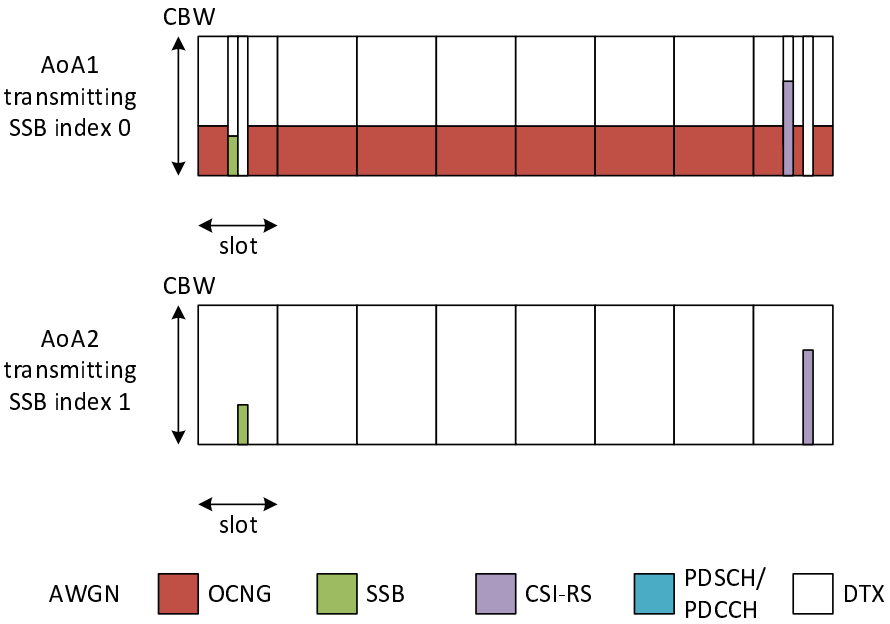

Figure A.7.6.1.5.1-1: Time multiplexed downlink transmissions (Config 1 example)

A.7.6.1.5.2 Test Requirements

In the test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1140ms ms from the beginning of time period T2.

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.1.6 SA event triggered reporting test without gap under non-DRX for FR2-2

A.7.6.1.6.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2. Supported test configurations are shown in table A.7.6.1.6.1-1.

Table A.7.6.1.6.1-1: supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	480 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
3	960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are two cells in the test, PCell (Cell 1) and a FR2-2 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.7.6.1.6.1-2, A.7.6.1.6.1-3 and A.7.6.1.6.1-4 below.

In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

Table A.7.6.1.6.1-2: General test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2-2 without gap without DRX

Parameter	Unit	Config	Value	Comment
Active cell		1,2,3	PCell (Cell 1)	
Neighbour cell		1,2,3	Cell 2	Cell to be identified.
RF Channel Number		1,2,3	1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
SMTC configuration		1,2,3	SMTC.1	
A3-Offset	dB	1,2,3	-11	
CP length		1,2,3	Normal	
Hysteresis	dB	1,2,3	0	
Time To Trigger	s	1,2,3	0	
Filter coefficient		1,2,3	0	L3 filtering is not used
DRX		1,2,3	OFF	

Time offset between Cell 1 and Cell 2		1,2,3	3 μs	Synchronous cells
T1	s	1,2,3	5	
T2	s	1,2,3	5	

Table A.7.6.1.6.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2-2 without gap without DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1,2,3	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
		2	400: $N_{RB,c}$ = 66		400: $N_{RB,c}$ = 66	
		3	400: $N_{RB,c}$ = 33		400: $N_{RB,c}$ = 33	
Data RBs allocated		1	66		66	
		2	66		66	
		3	33		33	
Intial BWP configuration		1,2,3	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1,2,3	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1,2,3	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1,2,3	SSB		SSB	
PDSCH RMC configuration		1	SR.3.2 TDD		N/A	
		2,3	SR.3.3 TDD			
RMSI CORESET RMC configuration		1	CR.3.1 TDD		N/A	
		2,3	CR.3.2 TDD		N/A	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD		N/A	
		2,3	CCR.3.7 TDD		N/A	
TRS configuration		1,2,3	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI states		1,2,3	TCI.State.2		N/A	
PDSCH/PDCCH subcarrier spacing	kHz	1,2,3	120		120	
OCNG Patterns		1,2,3	OP.5		N/A	
cellIndividualOffset	dB	1,2,3	N/A		16	
SSB		1	SSB.1 FR2		SSB.7 FR2	
		2	SSB.9 FR2		SSB.15 FR2	
		3	SSB.10 FR2		SSB.16 FR2	
Propagation Condition		1, 2,3	AWGN		AWGN	

Table A.7.6.1.6.1-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2-2 without gap without DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1,2,3	Setup 3 defined in A.3.15.3			
			AoA1		AoA2	
Beam assumption[Note 4]		1,2,3	Rough		Rough	

E_s	dBm/SCS	1	-89	-89	-Infinity	-89
		2	-83	-83	-Infinity	-83
		3	-80	-80	-Infinity	-80
$\hat{E}_s/I_{ot}$ BB Note 5	dB	1, 2,3	-0.12	-0.12	-Infinity	-0.12
SSB_RP	dBm/SCS	1	-89	-89	-Infinity	-89
		2	-83	-83	-Infinity	-83
		3	-80	-80	-Infinity	-80
Io	dBm/95.04MHz	1,2,3	-61.41	-61.41	-Infinity	-61.41
Time multiplexing of the downlink transmissions from each AoA		1, 2,3	Defined in Figure A.7.6.1.1.1-1			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Void
Note 3: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 5: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

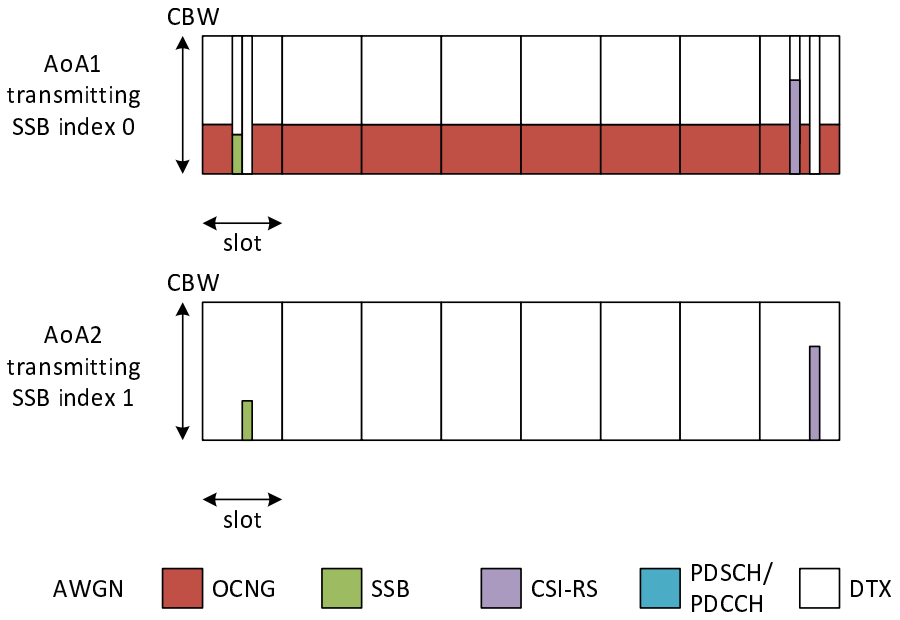

Figure A.7.6.1.6.1-1: Time multiplexed downlink transmissions (Config 1 example)

A.7.6.1.6.2 Test Requirements

In the test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

For Configuration 1,

- 2.4s (60*20ms+60*20ms)for a UE supporting power class 1,
- 1.44s (36*20ms+36*20ms) for a UE supporting power class 2 and 3

For Configuration 2,

- 3.6s (120*20ms+60*20ms) for a UE supporting power class 1,
- 2.16s (72*20ms+36*20ms) for a UE supporting power class 2 and 3

For Configuration 3,

- 4.8s (180*20ms+60*20ms) for a UE supporting power class 1,
- 2.88s (108*20ms+36*20ms) for a UE supporting power class 2 and 3

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.1.7 SA event triggered reporting test without gap under DRX for FR2-2

A.7.6.1.7.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2. Supported test configurations are shown in table A.7.6.1.7.1-1.

Table A.7.6.1.7.1-1: supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	480 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
3	960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are two cells in the test, PCell (Cell 1) and a FR2-2 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.7.6.1.7.1-2 ~ 6.

In the measurement control information, a measurement object is configured for the frequency of the Pcell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furhtermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.7.6.1.7.1-2: General test parameters for intra-frequency event triggered reporting for SA with TDD Pcell in FR2-2 without gap with DRX

Parameter	Unit	Config	Value		Comment
			Test 1	Test 2	
Active cell		1, 2,3	PCell (Cell 1)		
Neighbour cell		1, 2,3	Cell 2		Cell to be identified.
RF Channel Number		1, 2,3	1: Cell 1 and Cell 2		One TDD carrier frequency is used for the NR cells.
SMTC configuration		1, 2,3	SMTC.1		
A3-Offset	dB	1, 2,3	-6		
CP length		1, 2,3	Normal		
Hysteresis	dB	1, 2,3	0		
Time To Trigger	s	1, 2,3	0		
Filter coefficient		1, 2,3	0		L3 filtering is not used
DRX		1, 2,3	DRX.1	DRX.7	DRX related parameters are defined in Table A.7.6.1.2.1-5
Time offset between Cell 1 and Cell 2		1, 2,3	3 μs		Synchronous cells
T1	s	1, 2,3	5		
T2	s	1, 2,3	10	52	

Table A.7.6.1.7.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2-2 without gap with DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2,3	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
		2	400: $N_{RB,c}$ = 66		400: $N_{RB,c}$ = 66	
		3	400: $N_{RB,c}$ = 33		400: $N_{RB,c}$ = 33	
Data RBs allocated		1	66		66	
		2	66		66	
		3	33		33	
Intial BWP configuration		1, 2,3	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2,3	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2,3	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2,3	SSB		SSB	
PDSCH RMC configuration		1	SR.3.2 TDD		N/A	
		2,3	SR.3.3 TDD			
RMSI CORESET RMC configuration		1	CR.3.1 TDD		N/A	
		2,3	CR.3.2 TDD		N/A	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD		N/A	
		2,3	CCR.3.7 TDD		N/A	
TRS configuration		1, 2,3	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI states		1, 2,3	TCI.State.2		N/A	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2,3	120		120	
OCNG Patterns		1, 2,3	OP.1		OP.1	
SSB		1	SSB.1 FR2		SSB.7 FR2	
		2	SSB.9 FR2		SSB.15 FR2	
		3	SSB.10 FR2		SSB.16 FR2	
Propagation Condition		1, 2,3	AWGN		AWGN	

Table A.7.6.1.7.1-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD Pcell in FR2-2 without gap with DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1, 2,3	Setup 1 defined in A.3.15.1			
Beam assumption Note 4		1,2,3	Rough		Rough	
$\hat{E}_s / I_{ot}$ BB Note 5	dB	1, 2,3	3.77	-1.52	-Infinity	-1.52
N_{oc} Note 2	dBm/15 KHz	1, 2,3	-98			
N_{oc} Note 2	dBm/SCS	1	-89			
		2	-83			
		3	-80			
SSB_RP	dBm/SCS	1	-85	-85	-Infinity	-85

		2	-79	-79	-Infinity	-79
		3	-76	-76	-Infinity	-76
$\hat{E}_s / N_{oc}$	dB	1, 2,3	4	4	-Infinity	4
Io	dBm/95.04MHz	1, 2,3	-54.53	-52.18	See Cell 1 columns	

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.

Note 5: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

A.7.6.1.7.2 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

For Configuration 1,

- 7.2s (60*40ms*1.5 +60*40ms*1.5) for a UE supporting power class 1,
- 4.32s (36*40ms*1.5 + 36*40ms*1.5) for a UE supporting power class 2 and 3

For Configuration 2,

- 10.8s (120*40ms*1.5 +60*40ms*1.5) for a UE supporting power class 1,
- 6.48s (72*40ms*1.5 + 36*40ms*1.5) for a UE supporting power class 2 and 3

For Configuration 3,

- 14.4s (180*40ms*1.5 + 60*40ms*1.5) for a UE supporting power class 1,
- 8.64s (108*40ms*1.5 + 36*40ms*1.5) for a UE supporting power class 2 and 3

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

For Configuration 1,

- 76.8s (60*640ms +60*640ms) for a UE supporting power class 1,
- 46.08s (36*640ms + 36*640ms) for a UE supporting power class 2 and 3

For Configuration 2,

- 115.2s (120*640ms +60*640ms) for a UE supporting power class 1,
- 69.12s (72*640ms + 36*640ms) for a UE supporting power class 2 and 3

For Configuration 3,

- 153.6s (180*640ms + 60*640ms) for a UE supporting power class 1,
- 92.16s (108*640ms + 36*640ms) for a UE supporting power class 2 and 3

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.1.8 SA event triggered reporting test with per-UE gaps under non-DRX for FR2-2

A.7.6.1.8.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2. Supported test configurations are shown in table A.7.6.1.8.1-1.

Table A.7.6.1.8.1-1: supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	480 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
3	960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are two cells in the test, PCell (Cell 1) and a FR2-2 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.7.6.1.8.1-2 ~ 4 below.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

Table A.7.6.1.8.1-2: General test parameters for intra-frequency event triggered reporting for SA with TDD Pcell in FR2-2 with per-UE gaps without DRX

Parameter	Unit	Config	Value	Comment
Active cell		1,2,3	PCell (Cell 1)	
Neighbour cell		1,2,3	Cell 2	Cell to be identified.
RF Channel Number		1,2,3	1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
Gap type		1,2,3	Per-UE gaps	
Measurement gap repitition periodicity	ms	1,2,3	40	
Measurement gap length	ms	1,2,3	6	
Measurement gap offset	ms	1,2,3	39	
SMTC configuration		1,2,3	SMTC.1	
CSI-RS parameters		1,2,3	CSI-RS.3.2 TDD	
A3-Offset	dB	1,2,3	-11	

CP length		1,2,3	Normal	
Hysteresis	dB	1,2,3	0	
Time To Trigger	s	1,2,3	0	
Filter coefficient		1,2,3	0	L3 filtering is not used
DRX		1,2,3	OFF	
Time offset between Cell 1 and Cell 2		1,2,3	3 μs	Synchronous cells
T1	s	1, 2,3	5	
T2	s	1, 2,3	5	

Table A.7.6.1.8.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2-2 with per-UE gaps without DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2,3	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
		2	400: $N_{RB,c}$ = 66		400: $N_{RB,c}$ = 66	
		3	400: $N_{RB,c}$ = 33		400: $N_{RB,c}$ = 33	
Data RBs allocated		1	66		66	
		2	66		66	
		3	33		33	
Intial BWP configuration		1,2,3	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1,2,3	DLBWP.1.2		DLBWP.1.1	
Active UL BWP configuration		1,2,3	ULBWP.1.2		ULBWP.1.1	
RLM-RS		1,2,3	CSI-RS		SSB	
PDSCH RMC configuration		1	SR.3.2 TDD		N/A	
		2,3	SR.3.3 TDD			
RMSI CORESET RMC configuration		1	CR.3.1 TDD		N/A	
		2,3	CR.3.2 TDD		N/A	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD		N/A	
		2,3	CCR.3.7 TDD		N/A	
TRS configuration		1,2,3	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI states		1,2,3	TCI.State.2		N/A	
PDSCH/PDCCH subcarrier spacing	kHz	1,2,3	120		120	
OCNG Patterns		1,2,3	OP.5		N/A	
cellIndividualOffset	dB	1,2,3	N/A		16	
SSB		1	SSB.1 FR2		SSB.7 FR2	
		2	SSB.9 FR2		SSB.15 FR2	
		3	SSB.10 FR2		SSB.16 FR2	
Propagation Condition		1, 2,3	AWGN		AWGN	

Table A.7.6.1.8.1-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2-2 with per-UE gaps without DRX

Parameter	Unit	Config	Cell 1	Cell 2

			T1	T2	T1	T2
AoA setup		1, 2,3	Setup 3 defined in A.3.15.3			
			AoA1		AoA2	
Beam Assumption Note 4		1,2,3	Rough		Rough	
E_s	dBm/SCS	1	-89	-89	-Infinity	-89
		2	-83	-83	-Infinity	-83
		3	-80	-80	-Infinity	-80
$\hat{E}_s/I_{ot}$ BB Note 5	dB	1,2,3	-0.12	-0.12	-Infinity	-0.12
SSB_RP	dBm/SCS	1	-89	-89	-Infinity	-89
		2	-83	-83	-Infinity	-83
		3	-80	-80	-Infinity	-80
Io	dBm/95.04MHz	1,2,3	-61.41	-61.41	-Infinity	-61.41
Time multiplexing of the downlink transmissions from each AoA		1,2,3	Defined in Figure A.7.6.1.3.1-1			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Void
Note 3: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 5: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

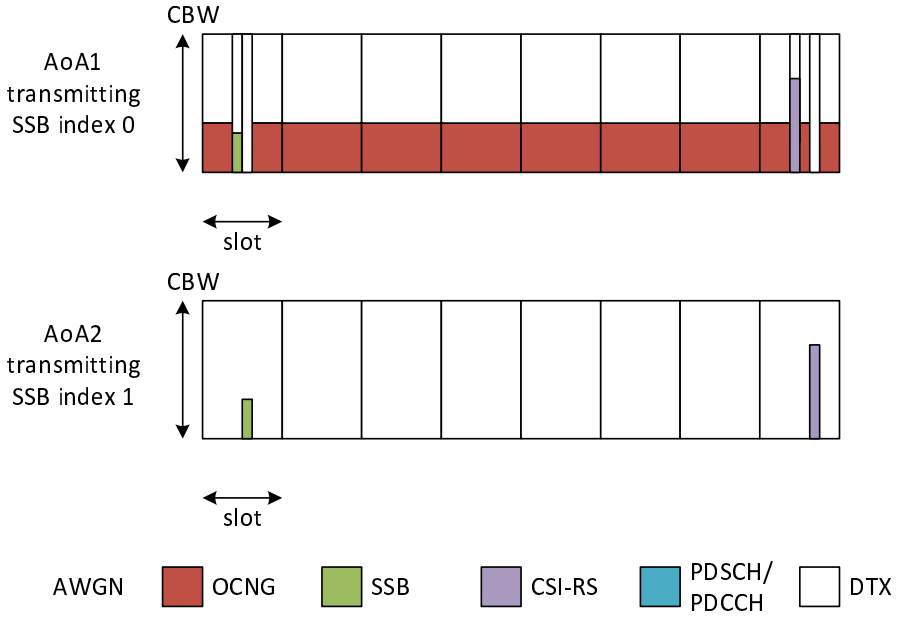

Figure A.7.6.1.8.1-1: Time multiplexed downlink transmissions (Config 1 example)

A.7.6.1.8.2 Test Requirements

In the test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

For Configuration 1,

- 4.8s (60*40ms+60*40ms) for a UE supporting power class 1,
- 2.88s (36*40ms+36*40ms) for a UE supporting power class 2 and 3

For Configuration 2,

- 7.2s (120*40ms+60*40ms) for a UE supporting power class 1,
- 4.32s (72*40ms+36*40ms) for a UE supporting power class 2 and 3

For Configuration 3,

- 9.6s (180*40ms+60*40ms) for a UE supporting power class 1,
- 5.76s (108*40ms+36*40ms) for a UE supporting power class 2 and 3

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.1.9 SA event triggered reporting test with per-UE gaps under DRX for FR2-2

A.7.6.1.9.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2. Supported test configurations are shown in table A.7.6.1.9.1-1.

Table A.7.6.1.9.1-1: supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	480 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
3	960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are two cells in the test, PCell (Cell 1) and a FR2-2 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.7.6.1.9.1-2, A.7.6.1.9.1-3 and A.7.6.1.9.1-4 below.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furhtermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.7.6.1.9.1-2: General test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2-2 with per-UE gaps with DRX

Parameter	Unit	Config	Value		Comment
			Test 1	Test 2	
Active cell		1,2,3	PCell (Cell 1)		
Neighbour cell		1,2,3	Cell 2		Cell to be identified.
RF Channel Number		1,2,3	1: Cell 1 and Cell 2		One TDD carrier frequency is used for the NR cells.
Gap type		1,2,3	Per-UE gaps		
Measurement gap repitition periodicity	ms	1,2,3	40		
Measurement gap length	ms	1,2,3	6		
Measurement gap offset	ms	1,2,3	39		
SMTC configuration		1,2,3	SMTC.1		
CSI-RS parameters		1,2,3	CSI-RS.3.2 TDD		
A3-Offset	dB	1,2,3	-6		
CP length		1,2,3	Normal		
Hysteresis	dB	1,2,3	0		
Time To Trigger	s	1,2,3	0		
Filter coefficient		1,2,3	0		L3 filtering is not used
DRX		1,2,3	DRX.1	DRX.7	DRX related parameters are defined in Table A.7.6X.1.2.17.6.1.7.1-5
Time offset between Cell 1 and Cell 2		1,2,3	3 μs		Synchronous cells
T1	s	1,2,3	5		
T2	s	1,2,3	10	52	

Table A.7.6.1.9.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2-2 with per-UE gaps with DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1,2,3	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
		2	400: $N_{RB,c}$ = 66		400: $N_{RB,c}$ = 66	
		3	400: $N_{RB,c}$ = 33		400: $N_{RB,c}$ = 33	
Data RBs allocated		1	66		66	
		2	66		66	
		3	33		33	
Intial BWP configuration		1,2,3	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1,2,3	DLBWP.1.2		DLBWP.1.1	
Active UL BWP configuration		1,2,3	ULBWP.1.2		ULBWP.1.1	

RLM-RS		1,2,3	CSI-RS	SSB
PDSCH RMC configuration		1	SR.3.2 TDD	N/A
		2,3	SR.3.3 TDD	
RMSI CORESET RMC configuration		1	CR.3.1 TDD	N/A
		2,3	CR.3.2 TDD	N/A
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD	N/A
		2,3	CCR.3.7 TDD	N/A
TRS configuration		1, 2,3	TRS.2.1 TDD	N/A
PDSCH/PDCCH TCI state		1, 2,3	TCI.State.2	N/A
PDSCH/PDCCH subcarrier spacing	kHz	1, 2,3	120	120
OCNG Patterns		1, 2,3	OP.1	OP.1
SSB		1	SSB.11 FR2	SSB.11 FR2
		2,3	SSB.12 FR2	SSB.12 FR2
Propagation Condition		1, 2,3	AWGN	AWGN

Table A.7.6.1.9.1-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2-2 with per-UE gaps with DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1, 2,3	Setup 1 defined in A.3.15.1			
Beam Assumption Note 4		1,2,3	Rough			
$\hat{E}_s/I_{ot}$ BB Note 5	dB	1, 2,3	3.77	-1.52	-Infinity	-1.52
N_{oc} Note 2	dBm/15 KHz	1, 2,3	-98			
N_{oc} Note 2	dBm/SCS	1	-89			
		2	-83			
		3	-80			
SSB_RP	dBm/SCS	1	-85	-85	-Infinity	-85
		2	-79	-79	-Infinity	-79
		3	-76	-76	-Infinity	-76
$\hat{E}_s/N_{oc}$	dB	1, 2,3	4	4	-Infinity	4
Io	dBm/95.04MHz	1,2,3	-54.53	-52.18	See Cell 1 columns	

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Note 5: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

A.7.6.1.9.2 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

For Configuration 1,

- 7.2s (60*40ms*1.5 +60*40ms*1.5) for a UE supporting power class 1,
- 4.32s (36*40ms*1.5 + 36*40ms*1.5) for a UE supporting power class 2 and 3

For Configuration 2,

- 10.8s (120*40ms*1.5 +60*40ms*1.5) for a UE supporting power class 1,
- 6.48s (72*40ms*1.5 + 36*40ms*1.5) for a UE supporting power class 2 and 3

For Configuration 3,

- 14.4s (180*40ms*1.5 + 60*40ms*1.5) for a UE supporting power class 1,
- 8.64s (108*40ms*1.5 + 36*40ms*1.5) for a UE supporting power class 2 and 3

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

For Configuration 1,

- 76.8s (60*640ms +60*640ms) for a UE supporting power class 1,
- 46.08s (36*640ms + 36*640ms) for a UE supporting power class 2 and 3

For Configuration 2,

- 115.2s (120*640ms +60*640ms) for a UE supporting power class 1,
- 69.12s (72*640ms + 36*640ms) for a UE supporting power class 2 and 3

For Configuration 3,

- 153.6s (180*640ms + 60*640ms) for a UE supporting power class 1,
- 92.16s (108*640ms + 36*640ms) for a UE supporting power class 2 and 3

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.1.10 SA event triggered reporting test with SSB time index detection without gap under non-DRX for FR2-2

A.7.6.1.10.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2. Supported test configurations are shown in table A.7.6.1.10.1-1.

Table A.7.6.1.10.1-1: supported test configurations

Configuration	Description
1	960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode

There are two cells in the test, Pcell (Cell 1) and a FR2-2 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.7.6.1.10.1-2, A.7.6.1.10.1-3 and A.7.6.1.10.1-4 below.

In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

Table A.7.6.1.10.1-2: General test parameters for intra-frequency event triggered reporting for SA with TDD Pcell in FR2-2 without gap without DRX

Parameter	Unit	Config	Value	Comment
Active cell		1	PCell (Cell 1)	
Neighbour cell		1	Cell 2	Cell to be identified.
RF Channel Number		1	1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
SMTC configuration		1	SMTC.1	
A3-Offset	dB	1	-11	
CP length		1	Normal	
Hysteresis	dB	1	0	
Time To Trigger	s	1	0	
Filter coefficient		1	0	L3 filtering is not used
DRX		1	OFF	
Time offset between Cell 1 and Cell 2		1	3 μs	Synchronous cells
T1	s	1	5	
T2	s	1	5	

Table A.7.6.1.10.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD Pcell in FR2-2 without gap without DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		1	24		24	
Intial BWP configuration		1	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1	SSB		SSB	
PDSCH RMC configuration		1	SR.3.2 TDD		N/A	

RMSI CORESET RMC configuration		1	CR.3.1 TDD	N/A
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD	N/A
TRS configuration		1	TRS.2.1 TDD	N/A
PDSCH/PDCCH TCI states		1	TCI.State.2	N/A
PDSCH/PDCCH subcarrier spacing	kHz	1	120	120
OCNG Patterns		1	OP.5	N/A
cellIndividualOffset	dB	1	N/A	16
SSB		1	SSB.10 FR2	SSB.16 FR2
Propagation Condition		1	AWGN	AWGN

Table A.7.6.1.10.1-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2-2 without gap without DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1	Setup 3 defined in A.3.15.3			
			AoA1		AoA2	
Beam assumption[Note 4]		1	Rough		Rough	
E_s	dBm/SCS	1	-80	-80	-Infinity	-80
$\hat{E}_s/I_{ot}$ BB Note 5	dB	1	-0.12	-0.12	-Infinity	-0.12
SSB_RP	dBm/SCS	1	-80	-80	-Infinity	-80
Io	dBm/95.04MHz	1	-64.41	-64.41	-Infinity	-64.41
Time multiplexing of the downlink transmissions from each AoA		1	Defined in Figure A.7.6X.1.1.1-1			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Void
Note 3: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 5: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

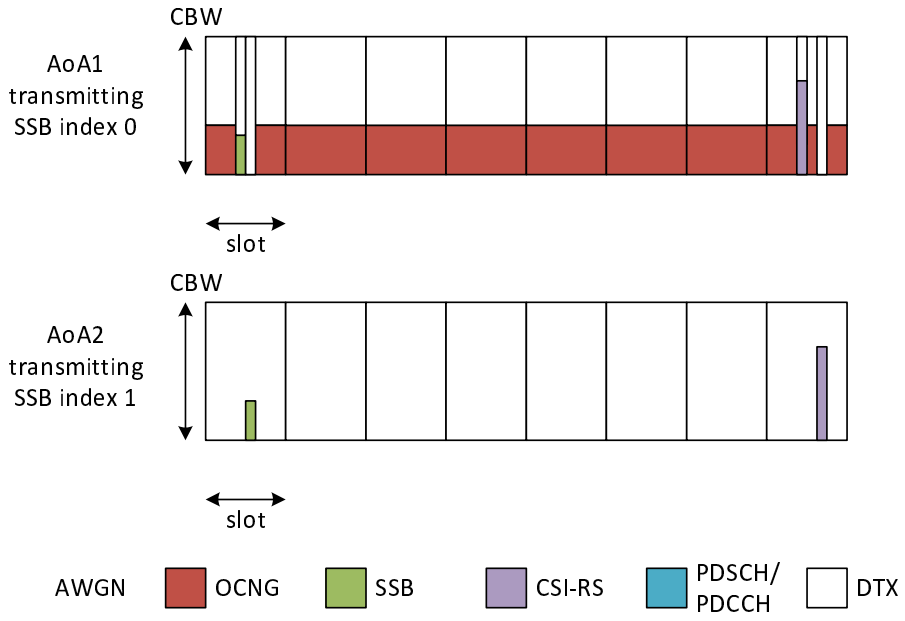

Figure A.7.6.1.10.1-1: Time multiplexed downlink transmissions (Config 1 example)

A.7.6.1.10.2 Test Requirements

In the test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 6.24s (180*20ms + 60*20ms +72*20ms) for a UE supporting power class 1,
- 3.84s (108*20ms + 36*20ms +48*20ms) for a UE supporting power class 2 and 3

The UE is required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.1.11 SA event triggered reporting test with SSB time index detection with per-UE gaps under non-DRX for FR2-2

A.7.6.1.11.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2. Supported test configurations are shown in table A.7.6.1.11.1-1.

Table A.7.6.1.11.1-1: supported test configurations

Configuration	Description
1	960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode

There are two cells in the test, PCell (Cell 1) and a FR2-2 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.7.6.1.11.1-2 ~ 4 below.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

Table A.7.6.1.11.1-2: General test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2-2 with per-UE gaps without DRX

Parameter	Unit	Config	Value	Comment
Active cell		1	PCell (Cell 1)	
Neighbour cell		1	Cell 2	Cell to be identified.
RF Channel Number		1	1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
Gap type		1	Per-UE gaps	
Measurement gap repitition periodicity	ms	1	40	
Measurement gap length	ms	1	6	
Measurement gap offset	ms	1	39	
SMTC configuration		1	SMTC.1	
CSI-RS parameters		1	CSI-RS.3.2 TDD	
A3-Offset	dB	1	-11	
CP length		1	Normal	
Hysteresis	dB	1	0	
Time To Trigger	s	1	0	
Filter coefficient		1	0	L3 filtering is not used
DRX		1	OFF	
Time offset between Cell 1 and Cell 2		1	3 μs	Synchronous cells
T1	s	1	5	
T2	s	1	5	

Table A.7.6.1.11.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2-2 with per-UE gaps without DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		1	24		24	
		2	48		48	
Intial BWP configuration		1	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1	DLBWP.1.2		DLBWP.1.1	
Active UL BWP configuration		1	ULBWP.1.2		ULBWP.1.1	
RLM-RS		1	CSI-RS		SSB	

PDSCH RMC configuration		1	SR.3.2 TDD	N/A
RMSI CORESET RMC configuration		1	CR.3.1 TDD	N/A
				N/A
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD	N/A
TRS configuration		1	TRS.2.1 TDD	N/A
PDSCH/PDCCH TCI states		1	TCI.State.2	N/A
PDSCH/PDCCH subcarrier spacing	kHz	1	120	120
OCNG Patterns		1	OP.5	N/A
cellIndividualOffset	dB	1	N/A	16
SSB		1	SSB.12 FR2	SSB.16 FR2
Propagation Condition		1	AWGN	AWGN

Table A.7.6.1.11.1-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2-2 with per-UE gaps without DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1	Setup 3 defined in A.3.15.3			
			AoA1		AoA2	
Beam Assumption[Note 4]		1	Rough		Rough	
E_S	dBm/SCS	1	-80	-80	-Infinity	-80
$\hat{E}_s/I_{ot}$ BB Note 5	dB	1	-0.12	-0.12	-Infinity	-0.12
SSB_RP	dBm/SCS	1	-80	-80	-Infinity	-80
Io	dBm/95.04MHz	1	-61.41	-61.41	-Infinity	-61.41
Time multiplexing of the downlink transmissions from each AoA		1	Defined in Figure A.7.6X.1.3.1-1			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Void
Note 3: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 5: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

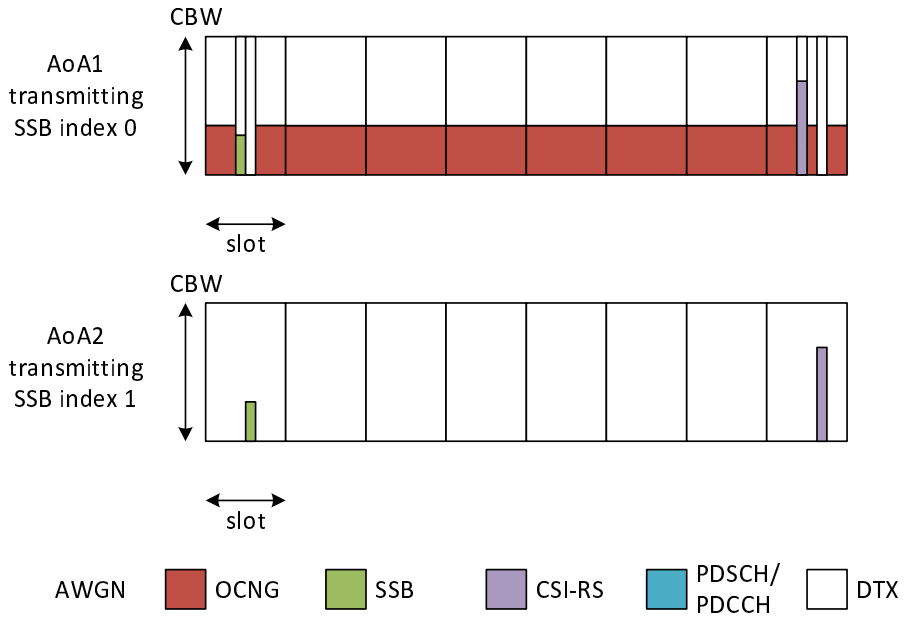

Figure A.7.6.1.11.1-1: Time multiplexed downlink transmissions (Config 1 example)

A.7.6.1.11.2 Test Requirements

In the test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 12.48s (180*40ms +60*40ms) for a UE supporting power class 1,
- 7.68s (108*40ms + 36*40ms) for a UE supporting power class 2 and 3

The UE is required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.2 Inter-frequency Measurements

A.7.6.2.1 SA event triggered reporting tests for FR2 without SSB time index detection when DRX is not used (PCell in FR2)

A.7.6.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as PCell in FR2 on NR RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.7.6.2.1.1-1, A.7.6.2.1.1-2, and A.7.6.2.1.1-3.

Measurement gap pattern configuration # 13 as defined in Table A.7.6.2.1.1-2 is provided for UE that does not support per-FR gap and for UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Supported test configurations are shown in table A.7.6.2.1.1-1.

Table A.7.6.2.1.1-1 SA event triggered reporting tests without SSB index reading for FR2-FR2

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: Void.	

Table A.7.6.2.1.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2 without SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1, 2	Two FR2 NR carrier frequencies is used.
Active cell		Config 1	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1	NR cell 2	NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1	13	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	39	
SMTC-SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
offsetMO	dB	Config 1	16	Applied to NR Cell 2 measurement object
A3-Offset	dB	Config 1	-11	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX		Config 1	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3μs	Synchronous cells.
T1	s	Config 1	5	
T2	s	Config 1	5.2 for PC1; 3.5 for other PC	

Table A.7.6.2.1.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2 without SSB time index detection

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2

AoA setup			Config 1	Setup 3 as specified in clause A.3.15			
				AoA1		AoA2	
Beam Assumption[Note 7]			1,2	Rough		Rough	
NR RF Channel Number			Config 1	1		2	
Duplex mode			Config 1	TDD		TDD	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated			Config 1	66		66	
BWP BW		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120	
TRS configuration			Config 1	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI state			Config 1	TCI.State.2		N/A	
EPRE ratio of PSS to SSS			Config 1	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
$\hat{E}_s$		dBm/SCS	Config 1	-87	-87	-Infinity	-87
SSBRP [Note 3]		dBm/SCS [Note5]	Config 1	-87	-87	-Infinity	-87
$\hat{E}_s / I_{ot}$ BB [Note 8]		dB	Config 1	1.89	1.89	-Infinity	1.89
Io[Note3]		dBm/95.04 MHz Note5	Config 1	-58.01	-58.01	-Infinity	-58.01
Propagation Condition			Config 1	AWGN		AWGN	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	VoidNote 3: SSBRP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Void
Note 5:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6:	As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 8:	Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.

A.7.6.2.1.2 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

5120 for UE supporting power class 1, or

3200 for UE supporting other power class.

The UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.2.2 SA event triggered reporting tests for FR2 without SSB time index detection when DRX is used (Pcell in FR2)

A.7.6.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as Pcell in FR2 on NR RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.7.6.2.2.1-1, A.7.6.2.2.1-2, and A.7.6.2.2.1-3.

In test 1&2 measurement gap pattern configuration # 13 as defined in Table A.7.6.2.2.1-2 is provided for UE that does not support per-FR gap and for UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Supported test configurations are shown in table A.7.6.2.2.1-1.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furhtermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.7.6.2.2.1-1: SA event triggered reporting tests without SSB index reading for FR2-FR2

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: Void.	

Table A.7.6.2.2.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2 without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1	1, 2		Two FR2 NR carrier frequencies is used.
Active cell		Config 1	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1	NR cell 2		NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1	13		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	39		
SMTC-SSB parameters		Config 1	SSB.3 FR2		As specified in clause A.3.10.2
A3-Offset	dB	Config 1	-6		
Hysteresis	dB	Config 1	0		
CP length		Config 1	Normal		
TimeToTrigger	s	Config 1	0		
Filter coefficient		Config 1	0		L3 filtering is not used
DRX		Config 1	DRX.1	DRX.7	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1	3μs		Synchronous cells.
T1	s	Config 1	5		
T2	s	Config 1	8 for PC1; 5 for other PC	82 for PC1; 52 for other PC	

Table A.7.6.2.2.1-3: Cell specific test parameters for CA inter-frequency event triggered reporting without SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1	Setup 1 as specified in clause A.3.15			
Beam Assumption[Note 7]			Config 1	Rough		Rough	
NR RF Channel Number			Config 1	1		2	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
Duplex mode			Config 1	TDD		TDD	
$BW_{channel}$		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated			Config 1	66		66	
BWP BW		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		OP.1	

PDSCH Reference measurement channel		Config 1	SR.3.1 TDD		-	
CORESET Reference Channel		Config 1	CR.3.1 TDD		-	
SMTC configuration defined in A.3.11.1 and A.3.11.2		Config 1	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1	120		120	
TRS configuration		Config 1	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI state		Config 1	TCI.State.2		N/A	
EPRE ratio of PSS to SSS		Config 1	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15 kHz Note5		-104.7		-104.7	
N_{oc} Note2	dBm/SCS Note4	Config 1	-95.7		-95.7	
SS-RSRP Note 3	dBm/SCS Note5	Config 1	-89.7	-89.7	-Infinity	-86.7
$\hat{E}_s / I_{ot}$	dB	Config 1	6	6	-Infinity	9
$\hat{E}_s / N_{oc}$	dB	Config 1	6	6	-Infinity	9
Io Note3	dBm/95.04 MHz Note5	Config 1	-59.7	-59.7	-66.7	-57.2
Propagation Condition		Config 1	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Void

Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone

Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone

Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.6.2.2.2 Test Requirements

In test 1 the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X1 ms from the beginning of time period T2, where X1 is

7680 for UE supporting power class 1, or

4800 for UE supporting other power class.

In test 2 the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X2 ms from the beginning of time period T2, where X2 is

81920 for UE supporting power class 1, or

51200 for UE supporting other power class.

In test 1 and 2 UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.2.3 SA event triggered reporting tests for FR2 with SSB time index detection when DRX is not used (PCell in FR2)

A.7.6.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as PCell in FR2 on NR RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.7.6.2.3.1-1, A.7.6.2.3.1-2, and A.7.6.2.3.1-3.

Measurement gap pattern configuration # 13 as defined in Table A.7.6.2.3.1-2 is provided for UE that does not support per-FR gap and for UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Supported test configurations are shown in table A.7.6.2.3.1-1.

Table A.7.6.2.3.1-1: SA event triggered reporting tests with SSB index reading for FR2-FR2

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: Void.	

Table A.7.6.2.3.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2 with SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1, 2	Two FR2 NR carrier frequencies is used.

Active cell		Config 1	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1	NR cell 2	NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1	13	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	39	
SMTC-SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
offsetMO	dB	Config 1	16	Applied to NR Cell 2 measurement object
A3-Offset	dB	Config 1	-11	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX		Config 1	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3μs	Synchronous cells.
T1	s	Config 1	5	
T2	s	Config 1	7 for PC1; 4.5 for other PC	

Table A.7.6.2.3.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2 with SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1	Setup 3 as specified in clause A.3.15			
				AoA1		AoA2	
Beam Assumption[Note 7]			Config 1	Rough		Rough	
NR RF Channel Number			Config 1	1		2	
Duplex mode			Config 1	TDD		TDD	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated			Config 1	66		66	
BWP BW		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120	
TRS configuration			Config 1	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI state			Config 1	TCI.State.2		N/A	
EPRE ratio of PSS to SSS							

EPRE ratio of PBCH DMRS to SSS		Config 1	0		0	
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
$\hat{E}_s$	dBm/SCS	Config 1	-87	-87	-Infinity	-87
SSBRP Note 3	dBm/SCS Note5	Config 1	-87	-87	-Infinity	-87
$\hat{E}_s / I_{ot}$ BB Note 8	dB	Config 1	1.89	1.89	-Infinity	1.89
Io Note3	dBm/95.04 MHz Note5	Config 1	-58.01	-58.01	-Infinity	-58.01
Propagation Condition		Config 1	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: SBRP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Void
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 8: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.

A.7.6.2.3.2 Test Requirements

In test 1 with per-UE gap and in test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

6720 for UE supporting power class 1, or

4160 for UE supporting other power class.

The UE is required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.2.4 SA event triggered reporting tests for FR2 with SSB time index detection when DRX is used (Pcell in FR2)

A.7.6.2.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as Pcell in FR2 on NR RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.7.6.2.4.1-1, A.7.6.2.4.1-2, and A.7.6.2.4.1-3.

In test 1&2 measurement gap pattern configuration # 13 as defined in Table A.7.6.2.4.1-2 is provided for UE that does not support per-FR gap and for UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Supported test configurations are shown in table A.7.6.2.4.1-1.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furhtermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.7.6.2.4.1-1: SA event triggered reporting tests with SSB index reading for FR2-FR2

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: Void.	

Table A.7.6.2.4.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2 with SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1	1, 2		Two FR2 NR carrier frequencies is used.
Active cell		Config 1	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1	NR cell 2		NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1	13		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	39		
SMTC-SSB parameters		Config 1	SSB.3 FR2		As specified in clause A.3.10.2
A3-Offset	dB	Config 1	-6		
Hysteresis	dB	Config 1	0		
CP length		Config 1	Normal		
TimeToTrigger	s	Config 1	0		
Filter coefficient		Config 1	0		L3 filtering is not used
DRX		Config 1	DRX.1	DRX.7	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1	3μs		Synchronous cells.
T1	s	Config 1	5		

T2	s	Config 1	11 for PC1; 6.5 for other PC	108 for PC1; 67 for other PC	

Table A.7.6.2.4.1-3: Cell specific test parameters for CA inter-frequency event triggered reporting with SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1	Setup 1 as specified in clause A.3.15			
Beam Assumption[Note 7]			Config 1	Rough		Rough	
NR RF Channel Number			Config 1	1		2	
Duplex mode			Config 1	TDD		TDD	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated			Config 1	66		66	
BWP BW		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120	
TRS configuration			Config 1	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI state			Config 1	TCI.State.2		N/A	
EPRE ratio of PSS to SSS			Config 1	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		dBm/15 kHz Note5		-104.7		-104.7	

N_{oc} Note2	dBm/SCS Note4	Config 1	-95.7		-95.7	
SS-RSRP Note 3	dBm/SCS Note5	Config 1	-89.7	-89.7	-Infinity	-86.7
$\hat{E}_s/I_{ot}$	dB	Config 1	6	6	-Infinity	9
$\hat{E}_s/N_{oc}$	dB	Config 1	6	6	-Infinity	9
Io Note3	dBm/95.04 MHz Note5	Config 1	-59.7	-59.7	-66.7	-57.2
Propagation Condition		Config 1	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Void
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.6.2.4.2 Test Requirements

In test 1 the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X1 ms from the beginning of time period T2, where X1 is

10080 for UE supporting power class 1, or

6240 for UE supporting other power class.

In test 2 the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X2 ms from the beginning of time period T2, where X2 is

107520 for UE supporting power class 1, or

66560 for UE supporting other power class.

In test 1 and 2 UE is required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.2.5 SA event triggered reporting tests for FR2 without SSB time index detection when DRX is not used (PCell in FR1)

A.7.6.2.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 2 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.7.6.2.5.1-1, A.7.6.2.5.1-2, and A.7.6.2.5.1-3.

In test 1 per-UE measurement gap pattern configuration # 0 as defined in Table A.7.6.2.5.1-2 is provided for a UE that does not support per-FR gap and in test 2 no gap pattern is configured as defined in Table A.7.6.2.5.1-2. If the UE supports per-FR gap, it is only required to pass test 2. Otherwise it is only required to pass test 1.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A4 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Supported test configurations are shown in table A.7.6.2.5.1-1.

Table A.7.6.2.5.1-1 SA event triggered reporting tests without SSB index reading for FR1-FR2

Config	Description of serving cell	Description of target cell
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
3	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	
Note: The UE is only required to be tested in one of the supported test configurations		

Table A.7.6.2.5.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2 without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1,2,3	1, 2		One NR FR1 and one NR FR2 carrier frequency is used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cell 2		NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3	0	Gap not configured	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	39	N/A	
SMTC-SSB parameters on NR RF Channel 1		Config 1	SSB.1 FR1		As specified in clause A.3.10.1
		Config 2	SSB.1 FR1		As specified in clause A.3.10.1
		Config 3	SSB.2 FR1		As specified in clause A.3.10.1
CSI-RS for tracking parameters on NR RF Channel 1		Config 1	TRS.1.1 FDD		
		Config 2	TRS.1.1 TDD		
		Config 3	TRS.1.2 TDD		
SMTC-SSB parameters on NR RF Channel 2		Config 1,2,3	SSB.3 FR2		As specified in clause A.3.10.2
offsetMO	dB	Config 1,2,3	6		
Hysteresis	dB	Config 1,2,3	0		
a4-Threshold	dBm	Config 1,2,3	-105		
CP length		Config 1,2,3	Normal		
TimeToTrigger	s	Config 1,2,3	0		
Filter coefficient		Config 1,2,3	0		L3 filtering is not used
DRX		Config 1,2,3	OFF		DRX is not used
Time offset between serving and neighbour cells		Config 1	3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.

		Config 2,3	3μs		Synchronous cells.
T1	s	Config 1,2,3	5		
T2	s	Config 1,2,3	5.2 for PC1; 3.5 for other PC	3 for PC1; 2 for other PC	

Table A.7.6.2.5.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2 without SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1,2,3	N/A		Setup 1 as specified in clause A.3.15	
Beam Assumption[Note 7]			Config 1,2,3	N/A		Rough	
NR RF Channel Number			Config 1,2,3	1		2	
Duplex mode			Config 1	FDD		TDD	
			Config 2,3	TDD		TDD	
TDD configuration			Config 1	Not Applicable		TDDConf.3.1	
			Config 2	TDDConf.1.1		TDDConf.3.1	
			Config 3	TDDConf.2.1		TDDConf.3.1	
$BW_{channel}$		MHz	Config 1	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
			Config 2	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
			Config 3	40: $N_{RB,c}$ = 106		100: $N_{RB,c}$ = 66	
Data RBs allocated			Config 1	52		66	
			Config 2	52		66	
			Config 3	106		66	
BWP BW		MHz	Config 1	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
			Config 2	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
			Config 3	40: $N_{RB,c}$ = 106		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD		-	
			Config 2	SR.1.1 TDD			
			Config 3	SR.2.1 TDD			
RMSI CORESET Reference Channel			Config 1	CR.1.1 FDD		-	
			Config 2	CR.1.1 TDD			
			Config 3	CR.2.1 TDD			
Dedicated CORESET RMC configuration			Config 1	CCR.1.1 FDD		-	
			Config 2	CCR.1.1 TDD			
			Config 3	CCR.2.1 TDD			
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1	SMTC.2		SMTC.2	
			Config 2,3	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	15		120	
			Config 3	30		120	
EPRE ratio of PSS to SSS							

EPRE ratio of PBCH DMRS to SSS		Config 1,2,3	0	0	
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
$\hat{E}_s$	dBm/SCS	Config 1,2,3	NA Link only, see clause A.3.7A	-Infinity	-87
SSB_RP Note 3	dBm/SCS	Config 1,2		-Infinity	-87
	Note5	Config 3		-Infinity	-87
$\hat{E}_s / I_{ot}$ BB Note 8	dB	Config 1,2,3		-Infinity	14.69
	dBm/95.04 MHz Note5	Config 1,2,3		-Infinity	-58.01
Propagation Condition		Config 1,2,3		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: SS B_RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Void
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 8: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.

A.7.6.2.5.2 Test Requirements

In test 1 with per-UE gap and in test 2 with per-FR gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

5120 for UE supporting power class 1, or

3200 for UE supporting other power class.

In test 2, without the gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

2560 for UE supporting power class 1, or

1600 for UE supporting other power class.

In test 1 and 2 UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.2.6 SA event triggered reporting tests for FR2 without SSB time index detection when DRX is used (Pcell in FR1)

A.7.6.2.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as Pcell in FR1 on NR RF channel 2 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.7.6.2.6.1-1, A.7.6.2.6.1-2, and A.7.6.2.6.1-3.

In test 1&2 per-UE measurement gap pattern configuration # 0 as defined in Table A.7.6.2.6.1-2 is provided for a UE that does not support per-FR gap and in test 3&4 no gap pattern is configured as defined in Table A.7.6.2.6.1-2. If a UE supports per-FR gap it is only required to pass test 3&4. Otherwise it is only required to pass test 1&2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A4 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Supported test configurations are shown in table A.7.6.2.6.1-1.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furhtermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.7.6.2.6.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR2

Config	Description of serving cell	Description of target cell
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	
Note: The UE is only required to be tested in one of the supported test configurations		

Table A.7.6.2.6.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2 without SSB time index detection

Parameter	Unit	Test configuration	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
NR RF Channel Number		Config 1,2,3	1, 2				One NR FR1 and one NR FR2 carrier frequency is used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)				NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cell 2				NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3	0		Gap not configured		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	39		N/A		

SMTC-SSB parameters on NR RF Channel 1		Config 1	SSB.1 FR1				As specified in clause A.3.10.1
		Config 2	SSB.1 FR1				As specified in clause A.3.10.1
		Config 3	SSB.2 FR1				As specified in clause A.3.10.1
CSI-RS for tracking parameters on NR RF Channel 1		Config 1	TRS.1.1 FDD				
		Config 2	TRS.1.1 TDD				
		Config 3	TRS.1.2 TDD				
SMTC-SSB parameters on NR RF Channel 2		Config 1,2,3	SSB.3 FR2				As specified in clause A.3.10.2
offsetMO	dB	Config 1,2,3	6				
Hysteresis	dB	Config 1,2,3	0				
a4-Threshold	dBm	Config 1,2,3	-105				
CP length		Config 1,2,3	Normal				
TimeToTrigger	s	Config 1,2,3	0				
Filter coefficient		Config 1,2,3	0				L3 filtering is not used
DRX		Config 1,2,3	DRX .1	DRX .7	DRX .1	DRX .7	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1	3ms				Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs				Synchronous cells.
T1	s	Config 1,2,3	5				
T2	s	Config 1,2,3	8 for PC1; 5 for other PC	82 for PC1; 52 for other PC	8 for PC1; 5 for other PC	82 for PC1; 52 for other PC	

Table A.7.6.2.6.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2 without SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1,2,3	NA		Setup 1 as specified in clause A.3.15	
NR RF Channel Number			Config 1,2,3	1		2	
Duplex mode			Config 1	FDD		TDD	
			Config 2,3	TDD		TDD	
TDD configuration			Config 1	Not Applicable		TDDConf.3.1	
			Config 2	TDDConf.1.1		TDDConf.3.1	
			Config 3	TDDConf.2.1		TDDConf.3.1	
$BW_{channel}$		MHz	Config 1	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
			Config 2	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
			Config 3	40: $N_{RB,c}$ = 106		100: $N_{RB,c}$ = 66	
Data RBs allocated			Config 1	52		66	
			Config 2	52		66	
			Config 3	106		66	
BWP BW		MHz	Config 1	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
			Config 2	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
			Config 3	40: $N_{RB,c}$ = 106		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	

	Dedicated DL BWP			DLBWP.1.1	N/A
	Dedicated UL BWP			ULBWP.1.1	N/A
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1	OP.1
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD	-
			Config 2	SR.1.1 TDD	
			Config 3	SR.2.1 TDD	
RMSI CORESET Reference Channel			Config 1	CR.1.1 FDD	-
			Config 2	CR.1.1 TDD	
			Config 3	CR.2.1 TDD	
Dedicated CORESET RMC configuration			Config 1	CCR.1.1 FDD	-
			Config 2	CCR.1.1 TDD	
			Config 3	CCR.2.1 TDD	
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1	SMTC.2	SMTC.2
			Config 2,3	SMTC.1	SMTC.1
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	15	120
			Config 3	30	120
EPRE ratio of PSS to SSS			Config 1,2,3	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} Note2		dBm/15 kHz Note5		NA Link only, see clause A.3.7A	-104.7
N_{oc} Note2		dBm/SCS Note4	Config 1,2		-95.7
			Config 3		-95.7
SSB_RP Note 3		dBm/SCS Note5	Config 1,2		-Infinity -86.7
			Config 3		-Infinity -86.7
$\hat{E}_s / I_{ot}$		dB	Config 1,2,3		-Infinity 9
$\hat{E}_s / N_{oc}$		dB	Config 1,2,3		-Infinity 9
Io Note3		dBm/9.36MHz	Config 1,2		- -

	dBm/38.16MHz	Config 3		-	-
	dBm/95.04 MHz Note5	Config 1,2,3		-66.7	-57.2
Propagation Condition		Config 1,2,3	AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SSB_RP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone

A.7.6.2.6.2 Test Requirements

In test 1 with per-UE gap and in test 3 without the gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X1 ms from the beginning of time period T2, where X1 is

7680 for UE supporting power class 1, or

4800 for UE supporting other power class.

In test 2 with per-UE gap and in test 4 without the gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X2 ms from the beginning of time period T2, where X2 is

81920 for UE supporting power class 1, or

51200 for UE supporting other power class.

In test 1, 2, 3 and 4 UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.2.7 SA event triggered reporting tests for FR2 with SSB time index detection when DRX is not used (PCell in FR1)

A.7.6.2.7.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

n this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 2 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.7.6.2.7.1-1, A.7.6.2.7.1-2, and A.7.6.2.7.1-3.

In test 1 per-UE measurement gap pattern configuration # 0 as defined in Table A.7.6.2.7.1-2 is provided for a UE that does not support per-FR gap and in test 2 measurement no gap pattern is configured as defined in Table A.7.6.2.7.1-2. If the UE supports per-FR gap, it is only required to pass test 2. Otherwise it is only required to pass test 1.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A4 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Supported test configurations are shown in table A.7.6.2.7.1-1.

Table A.7.6.2.7.1-1: SA event triggered reporting tests with SSB index reading for FR1-FR2

Config	Description of serving cell	Description of target cell
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	
Note: The UE is only required to be tested in one of the supported test configurations		

Table A.7.6.2.7.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2 with SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1,2,3	1, 2		One NR FR1 and one NR FR2 carrier frequency is used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cell 2		NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3	0	Gap not configured	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	39	N/A	
SMTC-SSB parameters on NR RF Channel 1		Config 1	SSB.1 FR1		As specified in clause A.3.10.1
		Config 2	SSB.1 FR1		As specified in clause A.3.10.1
		Config 3	SSB.2 FR1		As specified in clause A.3.10.1
CSI-RS for tracking parameters on NR RF Channel 1		Config 1	TRS.1.1 FDD		
		Config 2	TRS.1.1 TDD		
		Config 3	TRS.1.2 TDD		
SMTC-SSB parameters on NR RF Channel 2		Config 1,2,3	SSB.3 FR2		As specified in clause A.3.10.2
offsetMO	dB	Config 1,2,3	6		
Hysteresis	dB	Config 1,2,3	0		
a4-Threshold	dBm	Config 1,2,3,4,5,6	-105		
CP length		Config 1,2,3	Normal		
TimeToTrigger	s	Config 1,2,3	0		
Filter coefficient		Config 1,2,3	0		L3 filtering is not used
DRX		Config 1,2,3	OFF		DRX is not used
Time offset between serving and neighbour cells		Config 1	3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs		Synchronous cells.
T1	s	Config 1,2,3	5		
T2	s	Config 1,2,3	7 for PC1; 4.5 for other PC	3.5 for PC1; 2.5 for other PC	

Table A.7.6.2.7.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2 with SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1,2,3	NA		Setup 1 as specified in clause A.3.15	
Beam Assumption[Note 7]			Config 1,2,3	N/A		Rough	
NR RF Channel Number			Config 1,2,3	1		2	
Duplex mode			Config 1	FDD		TDD	
			Config 2,3	TDD		TDD	
TDD configuration			Config 1	Not Applicable		TDDConf.3.1	
			Config 2	TDDConf.1.1		TDDConf.3.1	
			Config 3	TDDConf.2.1		TDDConf.3.1	
$BW_{channel}$		MHz	Config 1	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
			Config 2	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
			Config 3	40: $N_{RB,c}$ = 106		100: $N_{RB,c}$ = 66	
Data RBs allocated			Config 1	52		66	
			Config 2	52		66	
			Config 3	106		66	
BWP BW		MHz	Config 1	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
			Config 2	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
			Config 3	40: $N_{RB,c}$ = 106		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD		-	
			Config 2	SR.1.1 TDD			
			Config 3	SR.2.1 TDD			
RMSI CORESET Reference Channel			Config 1	CR.1.1 FDD		-	
			Config 2	CR.1.1 TDD			
			Config 3	CR.2.1 TDD			
Dedicated CORESET RMC configuration			Config 1	CCR.1.1 FDD		-	
			Config 2	CCR.1.1 TDD			
			Config 3	CCR.2.1 TDD			
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1	SMTC.2		SMTC.2	
			Config 2,3	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	15		120	
			Config 3	30		120	
EPRE ratio of PSS to SSS			Config 1,2,3	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							

EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
$\hat{E}_s$	dBm/SCS	Config 1,2, 3	NA Link only, see clause A.3.7A	-Infinity	-87
SSB_RP Note 3	dBm/SCS	Config 1,2		-Infinity	-87
	Note5	Config 3		-Infinity	-87
$\hat{E}_s / I_{ot}$ BB Note 8	dB	Config 1,2,3		-Infinity	14.69
	dBm/95.04 MHz Note5	Config 1,2,3		Infinity	-58.01
Propagation Condition		Config 1,2,3		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: SSB_RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Void
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 8: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.

A.7.6.2.7.2 Test Requirements

In test 1 with per-UE gap and in test 2 with per-FR gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

6720 for UE supporting power class 1, or

4160 for UE supporting other power class.

In test 2 without the gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

3360 for UE supporting power class 1, or

2080 for UE supporting other power class.

In test 1 and 2 UE is required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.2.8 SA event triggered reporting tests for FR2 with SSB time index detection when DRX is used (PCell in FR1)

A.7.6.2.8.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 2 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.7.6.2.8.1-1, A.7.6.2.8.1-2, and A.7.6.2.8.1-3.

In test 1&2 per-UE measurement gap pattern configuration # 0 as defined in Table A.7.6.2.8.1-2 is provided for a UE that does not support per-FR gap and in test 3&4 measurement no gap pattern is configured as defined in Table A.7.6.2.8.1-2.If a UE supports per-FR gap , it is only required to pass test 3&4. Otherwise it is only required to pass test 1&2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A4 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Supported test configurations are shown in table A.7.6.2.8.1-1.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furhtermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.7.6.2.8.1-1: SA event triggered reporting tests with SSB index reading for FR1-FR2

Config	Description of serving cell	Description of target cell
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	
Note: The UE is only required to be tested in one of the supported test configurations		

Table A.7.6.2.8.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2 with SSB time index detection

Parameter	Unit	Test configuration	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
NR RF Channel Number		Config 1,2,3	1, 2				One NR FR1 and one NR FR2 carrier frequency is used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)				NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cell 2				NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3	0		Gap not configured		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	39		N/A		
SMTC-SSB parameters on NR RF Channel 1		Config 1	SSB.1 FR1				As specified in clause A.3.10.1
		Config 2	SSB.1 FR1				As specified in clause A.3.10.1
		Config 3	SSB.2 FR1				As specified in clause A.3.10.1
		Config 1	TRS.1.1 FDD				
		Config 2	TRS.1.1 TDD				

CSI-RS for tracking parameters on NR RF Channel 1		Config 3	TRS.1.2 TDD				
SMTC-SSB parameters on NR RF Channel 2		Config 1,2,3	SSB.3 FR2				As specified in clause A.3.10.2
offsetMO	dB	Config 1,2,3	6				
Hysteresis	dB	Config 1,2,3	0				
a4-Threshold	dBm	Config 1,2,3	-105				
CP length		Config 1,2,3	Normal				
TimeToTrigger	s	Config 1,2,3	0				
Filter coefficient		Config 1,2,3	0				L3 filtering is not used
DRX		Config 1,2,3	DRX .1	DRX .7	DRX .1	DRX .7	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1	3ms				Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs				Synchronous cells.
T1	s	Config 1,2,3	5				
T2	s	Config 1,2,3	11 for PC1; 6.5 for other PCT BD	108 for PC1; 67 for other PCT BD	11 for PC1; 6.5 for other PCT BD	108 for PC1; 67 for other PCT BD	

Table A.7.6.2.8.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2 with SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1,2,3	NA		Setup 1 as specified in clause A.3.15	
Beam Assumption[Note 7]			Config 1,2,3	N/A		Rough	
NR RF Channel Number			Config 1,2,3	1		2	
Duplex mode			Config 1	FDD		TDD	
			Config 2,3	TDD		TDD	
TDD configuration			Config 1	Not Applicable		TDDConf.3.1	
			Config 2	TDDConf.1.1		TDDConf.3.1	
			Config 3	TDDConf.2.1		TDDConf.3.1	
$BW_{channel}$		MHz	Config 1	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
			Config 2	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
			Config 3	40: $N_{RB,c}$ = 106		100: $N_{RB,c}$ = 66	
Data RBs allocated			Config 1	52		66	
			Config 2	52		66	
			Config 3	106		66	
BWP BW		MHz	Config 1	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
			Config 2	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
			Config 3	40: $N_{RB,c}$ = 106		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	

	Dedicated DL BWP			DLBWP.1.1	N/A	
	Dedicated UL BWP			ULBWP.1.1	N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1	OP.1	
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD	-	
			Config 2	SR.1.1 TDD		
			Config 3	SR.2.1 TDD		
RMSI CORESET Reference Channel			Config 1	CR.1.1 FDD	-	
			Config 2	CR.1.1 TDD		
			Config 3	CR.2.1 TDD		
Dedicated CORESET RMC configuration			Config 1	CCR.1.1 FDD	-	
			Config 2	CCR.1.1 TDD		
			Config 3	CCR.2.1 TDD		
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1	SMTC.2	SMTC.2	
			Config 2,3	SMTC.1	SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	15	120	
			Config 3	30	120	
EPRE ratio of PSS to SSS			Config 1,2,3	0	0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15 kHz Note5		NA Link only, see clause A.3.7A	-104.7	
N_{oc} Note2		dBm/SCS Note4	Config 1,2		-95.7	
			Config 3		-95.7	
SSB_RP Note 3		dBm/SCS Note5	Config 1,2		-Infinity	-86.7
			Config 3		-Infinity	-86.7
$\hat{E}_s/I_{ot}$		dB	Config 1,2,3		-Infinity	9
$\hat{E}_s/N_{oc}$		dB	Config 1,2,3		-Infinity	9
Io Note3		dBm/9.36MHz	Config 1,2		-	-
		dBm/38.16MHz	Config 3		-	-

	dBm/95.04 MHz Note5	Config 1,2,3		-66.7	-57.2
Propagation Condition		Config 1,2,3		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SSB_RP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.6.2.8.2 Test Requirements

In test 1 with per-UE gap and in test 3 without the gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X1 ms from the beginning of time period T2, where X1 is

10080 for UE supporting power class 1, or

6240 for UE supporting other power class.

In test 2 with per-UE gap and in test 4 without the gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X2 ms from the beginning of time period T2, where X2 is

107520 for UE supporting power class 1, or

66560 for UE supporting other power class.

In test 1, 2, 3 and 4 UE is required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.2.9 SA event triggered reporting tests For FR2 without SSB time index detection when DRX is not used (PCell in FR2) (rel16 additional mandatory gap pattern 17)

A.7.6.2.9.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as PCell in FR2 on NR RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.7.6.2.9.1-1, A.7.6.2.9.1-2, and A.7.6.2.9.1-3.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Supported test configurations are shown in table A.7.6.2.9.1-1.

Table A.7.6.2.9.1-1 SA event triggered reporting tests without SSB index reading for FR2-FR2

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: Void.	

Table A.7.6.2.9.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2 without SSB time index detection (GP17)

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1, 2	Two FR2 NR carrier frequencies is used.
Active cell		Config 1	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1	NR cell 2	NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1	17	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	39	
SMTC-SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
A3-Offset	dB	Config 1	-30	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX		Config 1	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3μs	Synchronous cells.
T1	s	Config 1	5	
T2	s	Config 1	6 (PC1) 4 (other PC)	

Table A.7.6.2.9.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2 without SSB time index detection (GP17)

Parameter	Unit	Test configuration	Cell 1		Cell 1	
			T1	T2	T1	T2
AoA setup		Config 1	Setup 3 as specified in clause A.3.15			
			AoA1		AoA2	
Beam assumption[Note 7]		Config 1	Rough		Rough	
NR RF Channel Number		Config 1	1		2	
Duplex mode		Config 1	TDD		TDD	
TDD configuration		Config 1	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	Config 1	100: $N_{RB,c} = 66$		100: $N_{RB,c} = 66$	

BWP BW		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120	
TRS configuration			Config 1	TRS.2.1 TDD		N/A	
TCI configuration			Config 1	CSI-RS.Config.0		N/A	
EPRE ratio of PSS to SSS			Config 1	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		dBm/15 kHz Note5		N/A		N/A	
N_{oc} Note2		dBm/SCS Note4	Config 1	N/A		N/A	
SS-RSRP Note 3		dBm/SCS Note5	Config 1	-87	-87	-Infinity	-87
$\hat{E}_s/I_{ot}$		dB	Config 1	N/A	N/A	-Infinity	N/A
$\hat{E}_s/N_{oc}$		dB	Config 1	N/A	N/A	-Infinity	N/A
Io Note3		dBm/95.04 MHz Note5	Config 1	-58.01	-58.01	-Infinity	-58.01
Propagation Condition			Config 1	AWGN			

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6:	As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.6.2.9.2 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 5120ms (PC1) or 3200ms (other than PC1) from the beginning of time period T2.

The UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.2.10 SA event triggered reporting test without gap under non-DRX

A.7.6.2.10.1 Test Purpose and Environment

The purpose of this test is to verify that if UE supports *interFrequencyMeas-NoGap-r16* and the flag *interFrequencyConfig-NoGap-r16* is configured by the network, the UE makes correct reporting of an event. This test will partly verify the inter-frequency without gap cell search requirements in clause 9.3.9. Supported test configurations are shown in table A.7.6.2.10.1-1.

Table A.7.6.2.10.1-1: supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

There are two cells in the test, NR cell 1 as PCell in FR2 on NR RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2. The SSB of Cell 2 is completely within UE's active BWP BW. The RBs containing SSB from cell 1 and cell 2 should be different in frequency location within the cell bandwidth. The test parameters for the Cell 1 and Cell 2 are given in Table A.7.6.2.10.1-2, A.7.6.2.10.1-3 and A.7.6.2.10.1-4 below.

In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

Table A.7.6.2.10.1-2: General test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 without gap without DRX

Parameter	Unit	Config	Value	Comment
Active cell		1	PCell (Cell 1)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		1	Cell 2	NR cell 2 is on NR RF channel number 2.
RF Channel Number		1	1, 2	Two FR2 NR carrier frequencies is used.
SMTC configuration		1	SMTC.1	
A3-Offset	dB	1	-6	
CP length		1	Normal	
Hysteresis	dB	1	0	
Time To Trigger	s	1	0	
Filter coefficient		1	0	L3 filtering is not used
DRX		1	OFF	
Time offset between Cell 1 and Cell 2		1	3 μs	Synchronous cells
T1	s	1	5	
T2	s	1	5	

Table A.7.6.2.10.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 without gap without DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Intial BWP configuration		1	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1	SSB		SSB	
PDSCH RMC configuration		1	SR.3.1 TDD		N/A	
RMSI CORESET RMC configuration		1	CR.3.1 TDD		CR.3.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD		CCR.3.1 TDD	
TRS configuration		1	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI states		1	TCI.State.2		N/A	
OCNG Patterns		1	OP.1		OP.1	
SSB		1	SSB.3 FR2		SSB.3 FR2	
Propagation Condition		1	AWGN			

Table A.7.6.2.10.1-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 without gap without DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1	Setup 1 defined in A.3.15.1			

Beam assumption Note 4		1	Rough		Rough	
$\hat{E}_s/I_{ot}$	dB	1	4	4	-Infinity	8
N_{oc} Note 2	dBm/15 KHz	1	-102			
N_{oc} Note 2	dBm/SCS	1	-93			
SS-RSRP	dBm/SCS	1	-89	-89	-Infinity	-85
$\hat{E}_s/N_{oc}$	dB	1	4	4	-Infinity	8
Io	dBm/95.04MHz	1	-58.56		-55.38	

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.6.2.10.2 Test Requirements

In the test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 2.4s for a UE supporting power class 1,
- 1.44s for a UE supporting power class 2, 3 and 4

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.2.11 SA event triggered reporting test without gap under DRX

A.7.6.2.11.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD inter-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2. Supported test configurations are shown in table A.7.6.2.11.1-1.

Table A.7.6.2.11.1-1: supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are two cells in the test: PCell (Cell 1) on NR RF channel 1 and a FR2 neighbour cell (Cell 2) on NR RF channel 2. The SSB of Cell 2 is completely within UE's active BWP BW. The RBs containing SSB from cell 1 and cell 2 should be different in frequency location within the cell bandwidth. The test parameters for the Cell 1 and Cell 2 are given in Table A.7.6.2.11.1-2 ~ 6.

In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furhtermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.7.6.2.11.1-2: General test parameters for inter-frequency event triggered reporting for SA with TDD PCell in FR2 without gap with DRX

Parameter	Unit	Config	Value	Comment
NR RF Channel Number		1, 2	1, 2	2 TDD carrier frequency are used for the NR cells.
Active cell		1, 2	PCell (Cell 1)	Cell 1 is on NR RF channel number 1.
Neighbour cell		1, 2	Cell 2	Cell to be identified. Cell 2 is on NR RF channel number 2.
SMTC configuration		1, 2	SMTC.1	
A3-Offset	dB	1, 2	-6	
CP length		1, 2	Normal	
Hysteresis	dB	1, 2	0	
Time To Trigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX		1, 2	DRX.7	
Time offset between Cell 1 and Cell 2		1, 2	3 μs	Synchronous cells
T1	s	1, 2	5	
T2	s	1, 2	52	

Table A.7.6.2.11.1-3: NR Cell specific test parameters for inter-frequency event triggered reporting for SA with TDD PCell in FR2 without gap with DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number		1, 2	1		2	
TDD configuration		1, 2	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	1, 2	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Intial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1		N/A	
Active DL BWP configuration		1, 2	DLBWP.1.1		N/A	
Active UL BWP configuration		1, 2	ULBWP.1.1		N/A	
RLM-RS		1, 2	SSB		N/A	
PDSCH RMC configuration		1, 2	SR.3.1 TDD		N/A	
RMSI CORESET RMC configuration		1, 2	CR.3.1 TDD		N/A	
Dedicated CORESET RMC configuration		1, 2	CCR.3.1 TDD		N/A	
TRS configuration		1, 2	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI states		1, 2	TCI.State.2		N/A	
OCNG Patterns		1, 2	OP.1		OP.1	
SSB		1	SSB.3 FR2		SSB.3 FR2	
		2	SSB.4 FR2		SSB.4 FR2	
Propagation Condition		1, 2	AWGN			

Table A.7.6.2.11.1-4: NR OTA Cell specific test parameters for inter-frequency event triggered reporting for SA with TDD PCell in FR2 without gap with DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1, 2	Setup 1 defined in A.3.15.1			
Beam assumption[Note 4]		1,2	Rough		Rough	
$\hat{E}_s/I_{ot}$	dB	1, 2	4	-1.46	-Infinity	-1.46
N_{oc} [Note 2]	dBm/15 KHz	1, 2	-98			
N_{oc} [Note 2]	dBm/SCS	1	-89			
		2	-86			
SS-RSRP	dBm/SCS	1	-85	-85	-Infinity	-85
		2	-82	-82	-Infinity	-82
$\hat{E}_s/N_{oc}$	dB	1, 2	4	4	-Infinity	4
Io	dBm/95.04MHz	1	-54.53	-52.18	-54.53	-52.18

Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.

A.7.6.2.11.2 Test Requirements

In test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 51.2s for a UE supporting power class 1,
- 30.72s for a UE supporting power class 2, 3 and 4est

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.2.12 SA event triggered reporting tests for FR2-2 without SSB time index detection when DRX is not used (PCell in FR2-2)

A.7.6.2.12.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as PCell in FR2 on NR RF channel 1 and NR cell 2 as neighbour cell in FR2-2 on NR RF channel 2. The test parameters and configurations are given in Tables A.7.6.2.1.12-1, A.7.6.2.12.1-2, and A.7.6.2.12.1-3.

Measurement gap pattern configuration # 13 as defined in Table A.7.6.2.12.1-2 is provided for UE that does not support per-FR gap and for UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Supported test configurations are shown in table A.7.6.2.12.1-1.

Table A.7.6.2.12.1-1 SA event triggered reporting tests without SSB index reading for FR2-FR2

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	480 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode

3	960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.7.6.2.12.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2-2 without SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2,3	1	Two FR2 NR carrier frequencies is used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cell 2	NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3	13	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	39	
SMTC-SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
		Config 2	SSB.11 FR2	
		Config 3	SSB.12 FR2	
offsetMO	dB	Config 1,2,3	16	Applied to NR Cell 2 measurement object
A3-Offset	dB	Config 1,2,3	-11	
Hysteresis	dB	Config 1,2,3	0	
CP length		Config 1,2,3	Normal	
TimeToTrigger	s	Config 1,2,3	0	
Filter coefficient		Config 1,2,3	0	L3 filtering is not used
DRX		Config 1,2,3	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1,2,3	3μs	Synchronous cells.
T1	s	Config 1,2,3	5	
T2	s	Config 1,2,3	5.2 for PC1; 3.5 for other PC	

Table A.7.6.2.12.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2-2 without SSB time index detection

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		Config 1,2,3	Setup 3 as specified in clause A.3.15			
			AoA1		AoA2	
Beam Assumption[Note 7]		1,2,3	Rough		Rough	
NR RF Channel Number		Config 1,2,3	1		2	
Duplex mode		Config 1,2,3	TDD		TDD	
TDD configuration		Config 1,2,3	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	Config 1	100: $N_{RB,c} = 66$		100: $N_{RB,c} = 66$	
		Config 2	400: $N_{RB,c} = 66$		400: $N_{RB,c} = 66$	
		Config 3	400: $N_{RB,c} = 33$		400: $N_{RB,c} = 33$	
Data RBs allocated		Config 1	66		66	

			Config 2	66		66	
			Config 3	33		33	
BWP BW		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
			Config 2	400: $N_{RB,c}$ = 66		400: $N_{RB,c}$ = 66	
			Config 3	400: $N_{RB,c}$ = 33		400: $N_{RB,c}$ = 33	
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,2,3	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1,2,3	CR.3.1 TDD		-	
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1,2,3	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2,3	120		120	
TRS configuration			Config 1,2,3	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI state			Config 1,2,3	TCI.State.2		N/A	
EPRE ratio of PSS to SSS			Config 1,2,3	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
$\hat{E}_s$		dBm/SCS	Config 1	-87	-87	-Infinity	-87
			Config 2	-81	-81	-Infinity	-81
			Config 3	-78	-78	-Infinity	-78
SSBRP Note 3		dBm/SCS Note5	Config 1	-87	-87	-Infinity	-87
			Config 2	-81	-81	-Infinity	-81
			Config 3	-78	-78	-Infinity	-78
$\hat{E}_s / I_{ot}$ BB Note 8		dB	Config 1,2,3	1.89	1.89	-Infinity	1.89
Io Note3		dBm/95.04 MHz Note5	Config 1,2,3	-58.01	-58.01	-Infinity	-58.01
Propagation Condition			Config 1,2,3	AWGN		AWGN	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	VoidNote 3: SSBRP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Void
Note 5:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6:	As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 8:	Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.

A.7.6.2.12.2 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

For Configuration 1,

7.68s (96*40ms + 96*40ms) for UE supporting power class 1, or

4.8s (60*40ms +60*40ms) for UE supporting other power class.

For Configuration 2,

11.52s (192*40ms + 96*40ms) for UE supporting power class 1, or

7.2s (120*40ms +60*40ms) for UE supporting other power class.

For Configuration 3,

15.36s (288*40ms + 96*40ms) for UE supporting power class 1, or

9.6s (180*40ms +60*40ms) for UE supporting other power class.

The UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.2.13 SA event triggered reporting tests for FR2-2 without SSB time index detection when DRX is used (PCell in FR2-2)

A.7.6.2.13.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as PCell in FR2 on NR RF channel 1 and NR cell 2 as neighbour cell in FR2-2 on NR RF channel 2. The test parameters and configurations are given in Tables A.7.63.2.13.1-1, A.7.6.2.13.1-2, and A.7.6.2.13.1-3.

In test 1&2 measurement gap pattern configuration # 13 as defined in Table A.7.6.2.13.1-2 is provided for UE that does not support per-FR gap and for UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Supported test configurations are shown in table A.7.6.2132.1-1.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furhtermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.7.6.2.13.1-1: SA event triggered reporting tests without SSB index reading for FR2-FR2

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	480 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
3	960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.7.6.2.13.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2-2 without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1,2,3	1, 2		Two FR2 NR carrier frequencies is used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cell 2		NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3	13		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	39		
SMTC-SSB parameters		Config 1	SSB.3 FR2		As specified in clause A.3.10.2
		Config 2	SSB.11 FR2		
		Config 3	SSB.12 FR2		
A3-Offset	dB	Config 1,2,3	-6		
Hysteresis	dB	Config 1,2,3	0		
CP length		Config 1,2,3	Normal		
TimeToTrigger	s	Config 1,2,3	0		
Filter coefficient		Config 1,2,3	0		L3 filtering is not used
DRX		Config 1,2,3	DRX.1	DRX.7	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1,2,3	3μs		Synchronous cells.
T1	s	Config 1,2,3	5		
T2	s	Config 1,2,3	8 for PC1; 5 for other PC	82 for PC1; 52 for other PC	

Table A.7.6.2.13.1-3: Cell specific test parameters for CA inter-frequency event triggered reporting without SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1,2,3	Setup 1 as specified in clause A.3.15			
Beam Assumption[Note 7]			Config 1,2,3	Rough		Rough	
NR RF Channel Number			Config 1,2,3	1		2	
TDD configuration			Config 1,2,3	TDDConf.3.1		TDDConf.3.1	
Duplex mode			Config 1,2,3	TDD		TDD	
$BW_{channel}$		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
			Config 2	400: $N_{RB,c}$ = 66		400: $N_{RB,c}$ = 66	
			Config 3	400: $N_{RB,c}$ = 33		400: $N_{RB,c}$ = 33	
Data RBs allocated			Config 1	66		66	
			Config 2	66		66	
			Config 3	33		33	
BWP BW		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
			Config 2	400: $N_{RB,c}$ = 66		400: $N_{RB,c}$ = 66	
			Config 3	400: $N_{RB,c}$ = 33		400: $N_{RB,c}$ = 33	
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,2,3	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1,2,3	CR.3.1 TDD		-	
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1,2,3	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2,3	120		120	
TRS configuration			Config 1,2,3	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI state			Config 1,2,3	TCI.State.2		N/A	
EPRE ratio of PSS to SSS			Config 1,2,3	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							

EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15 kHz Note5	Config 1,2,3	-104.7		-104.7	
N_{oc} Note2	dBm/SCS Note4	Config 1	-95.7		-95.7	
		Config 2	-89.7		-89.7	
		Config 3	-86.7		-86.7	
SS-RSRP Note 3	dBm/SCS Note5	Config 1	-89.7	-89.7	-Infinity	-86.7
		Config 2	-83.7	-83.7	-Infinity	-80.7
		Config 3	-80.7	-80.7	-Infinity	-77.7
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3	6	6	-Infinity	9
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3	6	6	-Infinity	9
Io Note3	dBm/95.04 MHz Note5	Config 1,2,3	-59.7	-59.7	-66.7	-57.2
Propagation Condition		Config 1,2,3	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Void

Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone

Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone

Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.6.2.13.2 Test Requirements

In test 1 the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X1 ms from the beginning of time period T2, where X1 is

For Configuration 1,

11.52s (96*40ms*1.5 + 96*40ms*1.5) for UE supporting power class 1, or

7.2s (60*40ms*1.5 + 60*40ms*1.5) for UE supporting other power class.

For Configuration 2,

17.28s (192*40ms*1.5 + 96*40ms*1.5) for UE supporting power class 1, or

10.80s (120*40ms*1.5 + 60*40ms*1.5) for UE supporting other power class.

For Configuration 3,

23.04s (288*40ms*1.5 + 96*40ms*1.5) for UE supporting power class 1, or

14.40s (180*40ms*1.5 + 60*40ms*1.5) for UE supporting other power class.

In test 2 the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X2 ms from the beginning of time period T2, where X2 is

For Configuratiojn 1,

122.88s (96*640ms + 96*640ms) for UE supporting power class 1, or

76.80s (60*640ms + 60*640ms) for UE supporting other power class.

For Configuratiojn 2,

184.32s (192*640ms + 96*640ms) for UE supporting power class 1, or

115.20s (120*640ms + 60*640ms) for UE supporting other power class.

For Configuratiojn 3,

245.76s (288*640ms + 96*640ms) for UE supporting power class 1, or

153.60s (180*640ms + 60*640ms) for UE supporting other power class.

In test 1 and 2 UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.2.14 SA event triggered reporting tests for FR2-2 with SSB time index detection when DRX is not used (PCell in FR2-2)

A.7.6.2.14.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as PCell in FR2 on NR RF channel 1 and NR cell 2 as neighbour cell in FR2-2 on NR RF channel 2. The test parameters and configurations are given in Tables A.7.6.2.14.1-1, A.7.6.2.14.1-2, and A.7.6.2.14.1-3.

Measurement gap pattern configuration # 13 as defined in Table A.7.6.2.14.1-2 is provided for UE that does not support per-FR gap and for UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Supported test configurations are shown in table A.7.6.2.14.1-1.

Table A.7.6.2.14.1-1: SA event triggered reporting tests with SSB index reading for FR2-FR2

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	480 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
3	960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.7.6.2.14.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2-2 with SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2,3	1, 2	Two FR2 NR carrier frequencies is used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cell 2	NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3	13	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	39	
SMTC-SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
		Config 2	SSB.11 FR2	
		Config 3	SSB.12 FR2	
offsetMO	dB	Config 1,2,3	16	Applied to NR Cell 2 measurement object
A3-Offset	dB	Config 1,2,3	-11	
Hysteresis	dB	Config 1,2,3	0	
CP length		Config 1,2,3	Normal	
TimeToTrigger	s	Config 1,2,3	0	
Filter coefficient		Config 1,2,3	0	L3 filtering is not used
DRX		Config 1,2,3	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1,2,3	3μs	Synchronous cells.
T1	s	Config 1,2,3	5	
T2	s	Config 1,2,3	7 for PC1; 4.5 for other PC	

Table A.7.6.2.14.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2-2 with SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1,2,3	Setup 3 as specified in clause A.3.15			
				AoA1		AoA2	
Beam Assumption[Note 7]			Config 1,2,3	Rough		Rough	
NR RF Channel Number			Config 1,2,3	1		2	
Duplex mode			Config 1,2,3	TDD		TDD	
TDD configuration			Config 1,2,3	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
			Config 2	400: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
			Config 3	400: $N_{RB,c}$ = 33		100: $N_{RB,c}$ = 33	
			Config 1	66		66	
			Config 2	66		66	
			Config 3	33		33	
BWP BW		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
			Config 2	400: $N_{RB,c}$ = 66		400: $N_{RB,c}$ = 66	
			Config 3	400: $N_{RB,c}$ = 33		400: $N_{RB,c}$ = 33	
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1		N/A	

	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1			Config 1,2,3	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,2,3	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1,2,3	CR.3.1 TDD		-	
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1,2,3	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2,3	120		120	
TRS configuration			Config 1,2,3	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI state			Config 1,2,3	TCI.State.2		N/A	
EPRE ratio of PSS to SSS			Config 1,2,3	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
$\hat{E}_s$		dBm/SCS	Config 1	-87	-87	-Infinity	-87
			Config 2	-81	-81	-Infinity	-81
			Config 3	-78	-78	-Infinity	-78
SSBRP Note 3		dBm/SCS Note5	Config 1	-87	-87	-Infinity	-87
			Config 2	-81	-81	-Infinity	-81
			Config 3	-78	-78	-Infinity	-78
$\hat{E}_s / I_{ot\ BB}$ Note 8		dB	Config 1,2,3	1.89	1.89	-Infinity	1.89
Io Note3		dBm/95.04 MHz Note5	Config 1,2,3	-58.01	-58.01	-Infinity	-58.01
Propagation Condition			Config 1,2,3	AWGN		AWGN	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Void
Note 3:	SBRP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Void
Note 5:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6:	As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 8:	Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.

A.7.6.2.14.2 Test Requirements

In test 1 with per-UE gap and in test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

For Configuration 1,

10.56s (96*40ms + 96*40ms+72*40ms) for UE supporting power class 1, or

6.72s (60*40ms+60*40ms+48*40ms) for UE supporting other power class.

For Configuration 2,

14.4s (192*40ms + 96*40ms+72*40ms) for UE supporting power class 1, or

9.12s (120*40ms+60*40ms+48*40ms) for UE supporting other power class.

For Configuration 3,

18.24s (288*40ms + 96*40ms+72*40ms) for UE supporting power class 1, or

11.52s (180*40ms+60*40ms+48*40ms) for UE supporting other power class.

The UE is required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.2.15 SA event triggered reporting tests for FR2-2 with SSB time index detection when DRX is used (PCell in FR2-2)

A.7.6.2.15.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as PCell in FR2 on NR RF channel 1 and NR cell 2 as neighbour cell in FR2-2 on NR RF channel 2. The test parameters and configurations are given in Tables A.7.6.2.15.1-1, A.7.6.2.15.1-2, and A.7.6.2.15.1-3.

In test 1&2 measurement gap pattern configuration # 13 as defined in Table A.7.6.2.15.1-2 is provided for UE that does not support per-FR gap and for UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Supported test configurations are shown in table A.7.6.2.15.1-1.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furhtermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.7.6.2.15.1-1: SA event triggered reporting tests with SSB index reading for FR2-FR2

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	480 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
3	960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.7.6.2.15.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2-2 with SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1,2,3	1, 2		Two FR2 NR carrier frequencies is used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cell 2		NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3	13		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	39		
SMTC-SSB parameters		Config 1	SSB.3 FR2		As specified in clause A.3.10.2
		Config 2	SSB.11 FR2		
		Config 3	SSB.12 FR2		
A3-Offset	dB	Config 1,2,3	-6		
Hysteresis	dB	Config 1,2,3	0		
CP length		Config 1,2,3	Normal		
TimeToTrigger	s	Config 1,2,3	0		
Filter coefficient		Config 1,2,3	0		L3 filtering is not used
DRX		Config 1,2,3	DRX.1	DRX.7	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1,2,3	3μs		Synchronous cells.
T1	s	Config 1,2,3	5		
T2	s	Config 1,2,3	11 for PC1; 6.5 for other PC	108 for PC1; 67 for other PC	

Table A.7.6.2.15.1-3: Cell specific test parameters for CA inter-frequency event triggered reporting with SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1,2,3	Setup 1 as specified in clause A.3.15			
Beam Assumption[Note 7]			Config 1,2,3	Rough		Rough	
NR RF Channel Number			Config 1,2,3	1		2	
Duplex mode			Config 1,2,3	TDD		TDD	
TDD configuration			Config 1,2,3	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
			Config 2	400: $N_{RB,c}$ = 66		400: $N_{RB,c}$ = 66	
			Config 3	400: $N_{RB,c}$ = 33		400: $N_{RB,c}$ = 33	
			Config 1	66		66	
			Config 2	66		66	
			Config 3	33		33	
BWP BW		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
			Config 2	400: $N_{RB,c}$ = 66		400: $N_{RB,c}$ = 66	
			Config 3	400: $N_{RB,c}$ = 33		400: $N_{RB,c}$ = 33	
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1			Config 1,2,3	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,2,3	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1,2,3	CR.3.1 TDD		-	
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1,2,3	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2,3	120		120	
TRS configuration			Config 1,2,3	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI state			Config 1,2,3	TCI.State.2		N/A	
EPRE ratio of PSS to SSS			Config 1,2,3	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							

EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15 kHz Note5		-104.7		-104.7	
N_{oc} Note2	dBm/SCS Note4	Config 1	-95.7		-95.7	
		Config 2	-89.7		-89.7	
		Config 3	-86.7		-86.7	
SS-RSRP Note 3	dBm/SCS Note5	Config 1	-89.7	-89.7	-Infinity	-86.7
		Config 2	-83.7	-83.7	-Infinity	-80.7
		Config 3	-80.7	-80.7	-Infinity	-77.7
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3	6	6	-Infinity	9
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3	6	6	-Infinity	9
Io Note3	dBm/95.04 MHz Note5	Config 1,2,3	-59.7	-59.7	-66.7	-57.2
Propagation Condition		Config 1,2,3	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Void

Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone

Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone

Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.6.2.15.2 Test Requirements

In test 1 the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X1 ms from the beginning of time period T2, where X1 is

For Configuration 1,

15.84s (96*40ms*1.5+96*40ms*1.5+72*40ms*1.5) for UE supporting power class 1, or

10.08s (60*40ms*1.5+60*40ms*1.5+48*40ms*1.5) for UE supporting other power class.

For Configuration 2,

21.6s (192*40ms*1.5+96*40ms*1.5+72*40ms*1.5) for UE supporting power class 1, or

13.68s (120*40ms*1.5+60*40ms*1.5+48*40ms*1.5) for UE supporting other power class.

For Configuration 3,

27.36s (288*40ms*1.5+96*40ms*1.5+48*40ms*1.5) for UE supporting power class 1, or

17.28s (180*40ms*1.5+60*40ms*1.5+48*40ms*1.5) for UE supporting other power class.

In test 2 the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X2 ms from the beginning of time period T2, where X2 is

For Configuration 1,

168.96s (96*640ms+96*640ms+72*640ms) for UE supporting power class 1, or

107.52s (60*640ms+60*640ms+48*640ms) for UE supporting other power class.

For Configuration 2,

230.4s (192*640ms+96*640ms+72*640ms) for UE supporting power class 1, or

145.92s (120*640ms+60*640ms+48*640ms) for UE supporting other power class.

For Configuration 3,

291.84s (288*640ms+96*640ms+72*640ms) for UE supporting power class 1, or

184.32s (180*640ms+60*640ms+48*640ms) for UE supporting other power class.

In test 1 and 2 UE is required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.2.16 SA event triggered reporting tests for FR2-2 without SSB time index detection when DRX is not used (PCell in FR1)

A.7.6.2.16.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 2 and NR cell 2 as neighbour cell in FR2-2 on NR RF channel 2. The test parameters and configurations are given in Tables A.7.6.2.16.1-1, A.7.6.2.16.1-2, and A.7.6.2.16.1-3.

In test 1 per-UE measurement gap pattern configuration # 0 as defined in Table A.7.6.2.16.1-2 is provided for a UE that does not support per-FR gap and in test 2 no gap pattern is configured as defined in Table A.7.6.2.16.1-2. If the UE supports per-FR gap, it is only required to pass test 2. Otherwise it is only required to pass test 1.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A4 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Supported test configurations are shown in table A.7.6.2.16.1-1.

Table A.7.6.2.16.1-1 SA event triggered reporting tests without SSB index reading for FR1-FR2

Config	Description of serving cell	Description of target cell
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
3	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	480 kHz SSB SCS, 400 MHz bandwidth, TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	

6	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	duplex mode
7	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
8	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
9	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	
Note: The UE is only required to be tested in one of the supported test configurations		

Table A.7.6.2.16.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2-2 without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1,2,3,4,5,6,7,8,9	1, 2		One NR FR1 and one NR FR2 carrier frequency is used.
Active cell		Config 1,2,3,4,5,6,7,8,9	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4,5,6,7,8,9	NR cell 2		NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4,5,6,7,8,9	0	Gap not configured	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4,5,6,7,8,9	39	N/A	
SMTC-SSB parameters on NR RF Channel 1		Config 1,4,7	SSB.1 FR1		As specified in clause A.3.10.1
		Config 2,5,8	SSB.1 FR1		
		Config 3,6,9	SSB.2 FR1		
CSI-RS for tracking parameters on NR RF Channel 1		Config 1,4,7	TRS.1.1 FDD		
		Config 2,5,8	TRS.1.1 TDD		
		Config 3,6,9	TRS.1.2 TDD		
SMTC-SSB parameters on NR RF Channel 2		Config 1,2,3	SSB.3 FR2		As specified in clause A.3.10.2
		Config 4,5,6	SSB.11 FR2		
		Config 7,8,9	SSB.12 FR2		
offsetMO	dB	Config 1,2,3,4,5,6,7,8,9	6		
Hysteresis	dB	Config 1,2,3,4,5,6,7,8,9	0		
a4-Threshold	dBm	Config 1,2,3,4,5,6,7,8,9	-105		
CP length		Config 1,2,3,4,5,6,7,8,9	Normal		
TimeToTrigger	s	Config 1,2,3,4,5,6,7,8,9	0		
Filter coefficient		Config 1,2,3,4,5,6,7,8,9	0		L3 filtering is not used

DRX		Config 1,2,3,4,5,6,7,8,9	OFF		DRX is not used
Time offset between serving and neighbour cells		Config 1,4,7	3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3,5,6,8,9	3μs		Synchronous cells.
T1	s	Config 1,2,3,4,5,6,7,8,9	5		
T2	s	Config 1,2,3,4,5,6,7,8,9	5.2 for PC1; 3.5 for other PC	3 for PC1; 2 for other PC	

Table A.7.6.2.16.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2-2 without SSB time index detection

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		Config 1,2,3,4,5,6,7,8,9	N/A		Setup 1 as specified in clause A.3.15	
Beam Assumption[Note 7]		Config 1,2,3,4,5,6,7,8,9	N/A		Rough	
NR RF Channel Number		Config 1,2,3,4,5,6,7,8,9	1		2	
Duplex mode		Config 1,4,7	FDD		TDD	
		Config 2,3,5,6,8,9	TDD		TDD	
TDD configuration		Config 1,4,7	Not Applicable		TDDConf.3.1	
		Config 2,5,8	TDDConf.1.1		TDDConf.3.1	
		Config 3,6,9	TDDConf.2.1		TDDConf.3.1	
$BW_{channel}$	MHz	Config 1	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
		Config 2	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
		Config 3	40: $N_{RB,c}$ = 106		100: $N_{RB,c}$ = 66	
		Config 4	10: $N_{RB,c}$ = 52		400: $N_{RB,c}$ = 66	
		Config 5	10: $N_{RB,c}$ = 52		400: $N_{RB,c}$ = 66	
		Config 6	40: $N_{RB,c}$ = 106		400: $N_{RB,c}$ = 66	
		Config 7	10: $N_{RB,c}$ = 52		400: $N_{RB,c}$ = 33	
		Config 8	10: $N_{RB,c}$ = 52		400: $N_{RB,c}$ = 33	
		Config 9	40: $N_{RB,c}$ = 106		400: $N_{RB,c}$ = 33	
Data RBs allocated		Config 1	52		66	
		Config 2	52		66	
		Config 3	106		66	
		Config 4	52		66	
		Config 5	52		66	
		Config 6	106		66	
		Config 7	52		33	
		Config 8	52		33	
		Config 9	106		33	
BWP BW	MHz	Config 1	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	

			Config 2	10: $N_{RB,c}$ = 52	100: $N_{RB,c}$ = 66	
			Config 3	40: $N_{RB,c}$ = 106	100: $N_{RB,c}$ = 66	
			Config 4	10: $N_{RB,c}$ = 52	400: $N_{RB,c}$ = 66	
			Config 5	10: $N_{RB,c}$ = 52	400: $N_{RB,c}$ = 66	
			Config 6	40: $N_{RB,c}$ = 106	400: $N_{RB,c}$ = 66	
			Config 7	10: $N_{RB,c}$ = 52	400: $N_{RB,c}$ = 33	
			Config 8	10: $N_{RB,c}$ = 52	400: $N_{RB,c}$ = 33	
			Config 9	40: $N_{RB,c}$ = 106	400: $N_{RB,c}$ = 33	
BWP configuration	Initial DL BWP		Config 1,2,3,4,5,6,7,8,9	DLBWP.0.1	N/A	
	Initial UL BWP			ULBWP.0.1	N/A	
	Dedicated DL BWP			DLBWP.1.1	N/A	
	Dedicated UL BWP			ULBWP.1.1	N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3,4,5,6,7,8,9	OP.1	OP.1	
PDSCH Reference measurement channel			Config 1,4,7	SR.1.1 FDD	-	
			Config 2,5,8	SR.1.1 TDD		
			Config 3,6,9	SR.2.1 TDD		
RMSI CORESET Reference Channel			Config 1,4,7	CR.1.1 FDD	-	
			Config 2,5,8	CR.1.1 TDD		
			Config 3,6,9	CR.2.1 TDD		
Dedicated CORESET RMC configuration			Config 1,4,7	CCR.1.1 FDD	-	
			Config 2,5,8	CCR.1.1 TDD		
			Config 3,6,9	CCR.2.1 TDD		
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1,4,7	SMTC.2	SMTC.2	
			Config 2,3,5,6,8,9	SMTC.1	SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2,4,5,7,8	15	120	
			Config 3,6,9	30	120	
EPRE ratio of PSS to SSS			Config 1,2,3,4,5,6,7,8,9	0	0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
$\hat{E}_s$		dBm/SCS	Config 1,2,3		-Infinity	-87
			Config 4,5,6		-Infinity	-81
			Config 7,8,9		-Infinity	-78

SSB_RP Note 3	dBm/SCS Note5	Config 1,2,3	NA Link only, see clause A.3.7A	-Infinity	-87
		Config 4,5,6		-Infinity	-81
		Config 7,8,9		-Infinity	-78
$\hat{E}_s/I_{ot}$ BB Note 8	dB	Config 1,2,3,4,5,6,7,8,9		-Infinity	14.69
	dBm/95.04 MHz Note5	Config 1,2,3,4,5,6,7,8,9		-Infinity	-58.01
Propagation Condition		Config 1,2,3,4,5,6,7,8,9		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: SS B_RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Void
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 8: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.

A.7.6.2.16.2 Test Requirements

In test 1 with per-UE gap and in test 2 with per-FR gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

For Configuration 1,2,3

7.68s (96*40ms+96*40ms) for UE supporting power class 1, or

4.8s (60*40ms + 60*40ms) for UE supporting other power class.

For Configuration 4,5,6

11.52s (192*40ms+96*40ms) for UE supporting power class 1, or

7.2s (120*40ms + 60*40ms) for UE supporting other power class.

For Configuration 7,8,9

15.36s (288*40ms+96*40ms) for UE supporting power class 1, or

9.6s (180*40ms + 60*40ms) for UE supporting other power class.

In test 2, without the gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

For Configuration 1,2,3

3.84s (96*20ms+96*20ms) for UE supporting power class 1, or

2.4s (60*20ms + 60*20ms) for UE supporting other power class.

For Configuration 4,5,6

5.76s (192*20ms+96*20ms) for UE supporting power class 1, or

3.6s (120*20ms + 60*20ms) for UE supporting other power class.

For Configuration 7,8,9

7.68s (288*20ms+96*20ms) for UE supporting power class 1, or

4.8s (180*20ms + 60*20ms) for UE supporting other power class.

In test 1 and 2 UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.2.17 SA event triggered reporting tests for FR2-2 without SSB time index detection when DRX is used (PCell in FR1)

A.7.6.2.17.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 2 and NR cell 2 as neighbour cell in FR2-2 on NR RF channel 2. The test parameters and configurations are given in Tables A.7.6.2.17.1-1, A.7.6.2.17.1-2, and A.7.6.2.17.1-3.

In test 1&2 per-UE measurement gap pattern configuration # 0 as defined in Table A.7.6.2.17.1-2 is provided for a UE that does not support per-FR gap and in test 3&4 no gap pattern is configured as defined in Table A.7.6.2.17.1-2. If a UE supports per-FR gap it is only required to pass test 3&4. Otherwise it is only required to pass test 1&2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A4 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Supported test configurations are shown in table A.7.6.2.17.1-1.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furhtermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.7.6.2.17.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR2

Config	Description of serving cell	Description of target cell
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
3	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	480 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
6	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	
7	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
8	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
9	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	

Note: The UE is only required to be tested in one of the supported test configurations

Table A.7.6.2.17.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2-2 without SSB time index detection

Parameter	Unit	Test configuration	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
NR RF Channel Number		Config 1,2,3,4,5,6,7,8,9	1, 2				One NR FR1 and one NR FR2 carrier frequency is used.
Active cell		Config 1,2,3,4,5,6,7,8,9	NR cell 1 (Pcell)				NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4,5,6,7,8,9	NR cell 2				NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4,5,6,7,8,9	0		Gap not configured		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4,5,6,7,8,9	39		N/A		
SMTC-SSB parameters on NR RF Channel 1		Config 1,4,7	SSB.1 FR1				As specified in clause A.3.10.1
		Config 2,5,8	SSB.1 FR1				
		Config 3,6,9	SSB.2 FR1				
CSI-RS for tracking parameters on NR RF Channel 1		Config 1,4,7	TRS.1.1 FDD				
		Config 2,5,8	TRS.1.1 TDD				
		Config 3,6,9	TRS.1.2 TDD				
SMTC-SSB parameters on NR RF Channel 2		Config 1,2,3	SSB.3 FR2				As specified in clause A.3.10.2
		Config 4,5,6	SSB.11 FR2				
		Config 7,8,9	SSB.12 FR2				
offsetMO	dB	Config 1,2,3,4,5,6,7,8,9	6				
Hysteresis	dB	Config 1,2,3,4,5,6,7,8,9	0				
a4-Threshold	dBm	Config 1,2,3,4,5,6,7,8,9	-105				
CP length		Config 1,2,3,4,5,6,7,7,8,9	Normal				
TimeToTrigger	s	Config 1,2,3,4,5,6,7,8,9	0				
Filter coefficient		Config 1,2,3,4,5,6,7,8,9	0				L3 filtering is not used
DRX		Config 1,2,3,4,5,6,7,8,9	DRX.1	DRX.7	DRX.1	DRX.7	As specified in clause A.3.3

Time offset between serving and neighbour cells		Config 1,4,7	3ms				Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3,5,6,8,9	3μs				Synchronous cells.
T1	s	Config 1,2,3,4,5,6,7,8,9	5				
T2	s	Config 1,2,3,4,5,6,7,8,9	8 for PC1; 5 for other PC	82 for PC1; 52 for other PC	8 for PC1; 5 for other PC	82 for PC1; 52 for other PC	

Table A.7.6.2.17.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2-2 without SSB time index detection

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		Config 1,2,3,4,5,6,7,8,9	NA		Setup 1 as specified in clause A.3.15	
NR RF Channel Number		Config 1,2,3,4,5,6,7,8,9	1		2	
Duplex mode		Config 1,4,7	FDD		TDD	
		Config 2,3,5,6,8,9	TDD		TDD	
TDD configuration		Config 1,4,7	Not Applicable		TDDConf.3.1	
		Config 2,5,8	TDDConf.1.1		TDDConf.3.1	
		Config 3,6,9	TDDConf.2.1		TDDConf.3.1	
$BW_{channel}$	MHz	Config 1	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
		Config 2	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
		Config 3	40: $N_{RB,c}$ = 106		100: $N_{RB,c}$ = 66	
		Config 4	10: $N_{RB,c}$ = 52		400: $N_{RB,c}$ = 66	
		Config 5	10: $N_{RB,c}$ = 52		400: $N_{RB,c}$ = 66	
		Config 6	40: $N_{RB,c}$ = 106		400: $N_{RB,c}$ = 66	
		Config 7	10: $N_{RB,c}$ = 52		400: $N_{RB,c}$ = 33	
		Config 8	10: $N_{RB,c}$ = 52		400: $N_{RB,c}$ = 33	
		Config 9	40: $N_{RB,c}$ = 106		400: $N_{RB,c}$ = 33	
Data RBs allocated		Config 1	52		66	
		Config 2	52		66	
		Config 3	106		66	
		Config 4	52		66	
		Config 5	52		66	
		Config 6	106		66	
		Config 7	52		33	
		Config 8	52		33	
		Config 9	106		33	
BWP BW	MHz	Config 1	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
		Config 2	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
		Config 3	40: $N_{RB,c}$ = 106		100: $N_{RB,c}$ = 66	

			Config 4	10: $N_{RB,c}$ = 52	400: $N_{RB,c}$ = 66
			Config 5	10: $N_{RB,c}$ = 52	400: $N_{RB,c}$ = 66
			Config 6	40: $N_{RB,c}$ = 106	400: $N_{RB,c}$ = 66
			Config 7	10: $N_{RB,c}$ = 52	400: $N_{RB,c}$ = 33
			Config 8	10: $N_{RB,c}$ = 52	400: $N_{RB,c}$ = 33
			Config 9	40: $N_{RB,c}$ = 106	400: $N_{RB,c}$ = 33
BWP configuration	Initial DL BWP		Config 1,2,3,4,5,6,7,8,9	DLBWP.0.1	N/A
	Initial UL BWP			ULBWP.0.1	N/A
	Dedicated DL BWP			DLBWP.1.1	N/A
	Dedicated UL BWP			ULBWP.1.1	N/A
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3,4,5,6,7,8,9	OP.1	OP.1
PDSCH Reference measurement channel			Config 1,4,7	SR.1.1 FDD	-
			Config 2,5,8	SR.1.1 TDD	
			Config 3,6,9	SR.2.1 TDD	
RMSI CORESET Reference Channel			Config 1,4,7	CR.1.1 FDD	-
			Config 2,5,8	CR.1.1 TDD	
			Config 3,6,9	CR.2.1 TDD	
Dedicated CORESET RMC configuration			Config 1,4,7	CCR.1.1 FDD	-
			Config 2,5,8	CCR.1.1 TDD	
			Config 3,6,9	CCR.2.1 TDD	
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1,4,7	SMTC.2	SMTC.2
			Config 2,3,5,6,8,9	SMTC.1	SMTC.1
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2,4,5,7,8	15	120
			Config 3,6,9	30	120
EPRE ratio of PSS to SSS			Config 1,2,3,4,5,6,7,8,9	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					

N_{oc} Note2	dBm/15 kHz Note5		NA Link only, see clause A.3.7A	-104.7	
N_{oc} Note2	dBm/SCS Note4	Config 1,2,3		-95.7	
		Config 4,5,6		-89.7	
		Config 7,8,9		-86.7	
SSB_RP Note 3	dBm/SCS Note5	Config 1,2,3		-Infinity	-86.7
		Config 4,5,6		-Infinity	-80.7
		Config 7,8,9		-Infinity	-77.7
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4,5,6,7,8,9		-Infinity	9
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3,4,5,6,7,8,9		-Infinity	9
Io Note3	dBm/95.04 MHz Note5	Config 1,2,3,4,5,6,7,8,9		-66.7	-57.2
Propagation Condition		Config 1,2,3,4,5,6,7,8,9	AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SSB_RP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone

Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone

A.7.6.2.17.2 Test Requirements

In test 1 with per-UE gap and in test 3 without the gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X1 ms from the beginning of time period T2, where X1 is

For Configuration 1,2,3

11.52s (96*40ms*1.5 + 96*40ms*1.5) for UE supporting power class 1, or

7.2s (60*40ms*1.5 + 60*40ms*1.5) for UE supporting other power class.

For Configuration 4,5,6

17.28s (192*40ms*1.5 + 96*40ms*1.5) for UE supporting power class 1, or

10.80s (120*40ms*1.5 + 60*40ms*1.5) for UE supporting other power class.

For Configuration 7,8,9

23.04s (288*40ms*1.5 + 96*40ms*1.5) for UE supporting power class 1, or

14.40s (180*40ms*1.5 + 60*40ms*1.5) for UE supporting other power class.

In test 2 with per-UE gap and in test 4 without the gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X2 ms from the beginning of time period T2, where X2 is

For Configuration 1,2,3

122.80s (96*640ms + 96*640ms) for UE supporting power class 1, or

76.80s (60*640ms + 60*640ms) for UE supporting other power class.

For Configuration 4,5,6

184.32s (192*640ms + 96*640ms) for UE supporting power class 1, or

115.20s (120*640ms + 60*640ms) for UE supporting other power class.

For Configuration 7,8,9

245.76s (288*640ms + 96*640ms) for UE supporting power class 1, or

153.60s (180*640ms + 60*640ms) for UE supporting other power class.

In test 1, 2, 3 and 4 UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.2.18 SA event triggered reporting tests for FR2-2 with SSB time index detection when DRX is not used (PCell in FR1)

A.7.6.2.18.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

n this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 2 and NR cell 2 as neighbour cell in FR2-2 on NR RF channel 2. The test parameters and configurations are given in Tables A.7.6.2.18.1-1, A.7.6.2.18.1-2, and A.7.6.2.18.1-3.

In test 1 per-UE measurement gap pattern configuration # 0 as defined in Table A.7.6.2.18.1-2 is provided for a UE that does not support per-FR gap and in test 2 measurement no gap pattern is configured as defined in Table A.7.6.2.18.1-2. If the UE supports per-FR gap, it is only required to pass test 2. Otherwise it is only required to pass test 1.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A4 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Supported test configurations are shown in table A.7.6.2.18.1-1.

Table A.7.6.2.18.1-1: SA event triggered reporting tests with SSB index reading for FR1-FR2

Config	Description of serving cell	Description of target cell
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
3	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	480 kHz SSB SCS,

5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	400 MHz bandwidth, TDD duplex mode
6	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	
7	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
8	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
9	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	
Note: The UE is only required to be tested in one of the supported test configurations		

Table A.7.6.2.18.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2-2 with SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1,2,3,4,5,6,7,8,9	1, 2		One NR FR1 and one NR FR2 carrier frequency is used.
Active cell		Config 1,2,3,4,5,6,7,8,9	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4,5,6,7,8,9	NR cell 2		NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4,5,6,7,8,9	0	Gap not configured	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4,5,6,7,8,9	39	N/A	
SMTC-SSB parameters on NR RF Channel 1		Config 1,4,7	SSB.1 FR1		As specified in clause A.3.10.1
		Config 2,5,8	SSB.1 FR1		
		Config 3,6,9	SSB.2 FR1		
CSI-RS for tracking parameters on NR RF Channel 1		Config 1,4,7	TRS.1.1 FDD		
		Config 2,5,8	TRS.1.1 TDD		
		Config 3,6,9	TRS.1.2 TDD		
SMTC-SSB parameters on NR RF Channel 2		Config 1,2,3	SSB.3 FR2		As specified in clause A.3.10.2
		Config 4,5,6	SSB.11 FR2		
		Config 7,8,9	SSB.12 FR2		
offsetMO	dB	Config 1,2,3,4,5,6,7,8,9	6		
Hysteresis	dB	Config 1,2,3,4,5,6,7,8,9	0		
a4-Threshold	dBm	Config 1,2,3,4,5,6,7,8,9	-105		
CP length		Config 1,2,3,4,5,6,7,8,9	Normal		
TimeToTrigger	s	Config 1,2,3,4,5,6,7,8,9	0		

Filter coefficient		Config 1,2,3,4,5,6,7,8,9	0		L3 filtering is not used
DRX		Config 1,2,3,4,5,6,7,8,9	OFF		DRX is not used
Time offset between serving and neighbour cells		Config 1,4,7	3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3,5,6,8,9	3μs		Synchronous cells.
T1	s	Config 1,2,3,4,5,6,7,8,9	5		
T2	s	Config 1,2,3,4,5,6,7,8,9	5.2 for PC1; 3.5 for other PC	3 for PC1; 2 for other PC	

Table A.7.6.2.18.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2-2 with SSB time index detection

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		Config 1,2,3,4,5,6,7,8,9	N/A		Setup 1 as specified in clause A.3.15	
Beam Assumption[Note 7]		Config 1,2,3,4,5,6,7,8,9	N/A		Rough	
NR RF Channel Number		Config 1,2,3,4,5,6,7,8,9	1		2	
Duplex mode		Config 1,4,7	FDD		TDD	
		Config 2,3,5,6,8,9	TDD		TDD	
TDD configuration		Config 1,4,7	Not Applicable		TDDConf.3.1	
		Config 2,5,8	TDDConf.1.1		TDDConf.3.1	
		Config 3,6,9	TDDConf.2.1		TDDConf.3.1	
$BW_{channel}$	MHz	Config 1	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
		Config 2	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
		Config 3	40: $N_{RB,c}$ = 106		100: $N_{RB,c}$ = 66	
		Config 4	10: $N_{RB,c}$ = 52		400: $N_{RB,c}$ = 66	
		Config 5	10: $N_{RB,c}$ = 52		400: $N_{RB,c}$ = 66	
		Config 6	40: $N_{RB,c}$ = 106		400: $N_{RB,c}$ = 66	
		Config 7	10: $N_{RB,c}$ = 52		400: $N_{RB,c}$ = 33	
		Config 8	10: $N_{RB,c}$ = 52		400: $N_{RB,c}$ = 33	
		Config 9	40: $N_{RB,c}$ = 106		400: $N_{RB,c}$ = 33	
Data RBs allocated		Config 1	52		66	
		Config 2	52		66	
		Config 3	106		66	
		Config 4	52		66	
		Config 5	52		66	
		Config 6	106		66	
		Config 7	52		33	

			Config 8	52	33
			Config 9	106	33
BWP BW		MHz	Config 1	10: $N_{RB,c}$ = 52	100: $N_{RB,c}$ = 66
			Config 2	10: $N_{RB,c}$ = 52	100: $N_{RB,c}$ = 66
			Config 3	40: $N_{RB,c}$ = 106	100: $N_{RB,c}$ = 66
			Config 4	10: $N_{RB,c}$ = 52	400: $N_{RB,c}$ = 66
			Config 5	10: $N_{RB,c}$ = 52	400: $N_{RB,c}$ = 66
			Config 6	40: $N_{RB,c}$ = 106	400: $N_{RB,c}$ = 66
			Config 7	10: $N_{RB,c}$ = 52	400: $N_{RB,c}$ = 33
			Config 8	10: $N_{RB,c}$ = 52	400: $N_{RB,c}$ = 33
			Config 9	40: $N_{RB,c}$ = 106	400: $N_{RB,c}$ = 33
BWP configuration	Initial DL BWP		Config 1,2,3,4,5,6,7,8,9	DLBWP.0.1	N/A
	Initial UL BWP			ULBWP.0.1	N/A
	Dedicated DL BWP			DLBWP.1.1	N/A
	Dedicated UL BWP			ULBWP.1.1	N/A
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3,4,5,6,7,8,9	OP.1	OP.1
PDSCH Reference measurement channel			Config 1,4,7	SR.1.1 FDD	-
			Config 2,5,8	SR.1.1 TDD	
			Config 3,6,9	SR.2.1 TDD	
RMSI CORESET Reference Channel			Config 1,4,7	CR.1.1 FDD	-
			Config 2,5,8	CR.1.1 TDD	
			Config 3,6,9	CR.2.1 TDD	
Dedicated CORESET RMC configuration			Config 1,4,7	CCR.1.1 FDD	-
			Config 2,5,8	CCR.1.1 TDD	
			Config 3,6,9	CCR.2.1 TDD	
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1,4,7	SMTC.2	SMTC.2
			Config 2,3,5,6,8,9	SMTC.1	SMTC.1
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2,4,5,7,8	15	120
			Config 3,6,9	30	120
EPRE ratio of PSS to SSS			Config 1,2,3,4,5,6,7,8,9	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					

$\hat{E}_s$	dBm/SCS	Config 1,2,3		-Infinity	-87
		Config 4,5,6		-Infinity	-81
		Config 7,8,9		-Infinity	-78
SSB_RP Note 3	dBm/SCS Note5	Config 1,2,3		-Infinity	-87
		Config 4,5,6		-Infinity	-81
		Config 7,8,9		-Infinity	-78
$\hat{E}_s / I_{ot}$ BB Note 8	dB	Config 1,2,3,4,5,6,7,8,9	NA Link only, see clause A.3.7A	-Infinity	14.69
	dBm/95.04 MHz Note5	Config 1,2,3,4,5,6,7,8,9		-Infinity	-58.01
Propagation Condition		Config 1,2,3,4,5,6,7,8,9		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: SS B_RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Void
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 8: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.

A.7.6.2.18.2 Test Requirements

In test 1 with per-UE gap and in test 2 with per-FR gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

For Configuration 1,2,3

10.56s (96*40ms+96*40ms+72*40ms) for UE supporting power class 1, or

6.72s (60*40ms + 60*40ms+48*40ms) for UE supporting other power class.

For Configuration 4,5,6

14.4s (192*40ms+96*40ms+72*40ms) for UE supporting power class 1, or

9.12s (120*40ms + 60*40ms+48*40ms) for UE supporting other power class.

For Configuration 7,8,9

18.24s (288*40ms+96*40ms+72*40ms) for UE supporting power class 1, or

11.52s (180*40ms + 60*40ms+48*40ms) for UE supporting other power class.

In test 2 without the gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

For Configuration 1,2,3

5.28s (96*20ms+96*20ms+72*20ms)for UE supporting power class 1, or

3.36s (60*20ms + 60*20ms+48*20ms) for UE supporting other power class.

For Configuration 4,5,6

7.2s (192*20ms+96*20ms+72*20ms) for UE supporting power class 1, or

4.56s (120*20ms + 60*20ms+48*20ms) for UE supporting other power class.

For Configuration 7,8,9

9.12s (288*20ms+96*20ms+72*20ms) for UE supporting power class 1, or

5.76s (180*20ms + 60*20ms+48*20ms) for UE supporting other power class.

In test 1 and 2 UE is required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.2.19 SA event triggered reporting tests for FR2-2 with SSB time index detection when DRX is used (PCell in FR1)

A.7.6.2.19.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 2 and NR cell 2 as neighbour cell in FR2-2 on NR RF channel 2. The test parameters and configurations are given in Tables A.7.6.2.19.1-1, A.7.6.2.19.1-2, and A.7.6.2.19.1-3.

In test 1&2 per-UE measurement gap pattern configuration # 0 as defined in Table A.7.6.2.19.1-2 is provided for a UE that does not support per-FR gap and in test 3&4 measurement no gap pattern is configured as defined in Table A.7.6.2.19.1-2. If a UE supports per-FR gap , it is only required to pass test 3&4. Otherwise it is only required to pass test 1&2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A4 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Supported test configurations are shown in table A.7.6.2.19.1-1.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furhtermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.7.6.2.19.1-1: SA event triggered reporting tests with SSB index reading for FR1-FR2

Config	Description of serving cell	Description of target cell
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
3	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	480 kHz SSB SCS, 400 MHz bandwidth, TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	

6	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	duplex mode
7	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
8	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
9	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	
Note: The UE is only required to be tested in one of the supported test configurations		

Table A.7.6.2.19.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2-2 with SSB time index detection

Parameter	Unit	Test configuration	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
NR RF Channel Number		Config 1,2,3,4,5,6,7,8,9	1, 2				One NR FR1 and one NR FR2 carrier frequency is used.
Active cell		Config 1,2,3,4,5,6,7,8,9	NR cell 1 (Pcell)				NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4,5,6,7,8,9	NR cell 2				NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4,5,6,7,8,9	0		Gap not configured		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4,5,6,7,8,9	39		N/A		
SMTC-SSB parameters on NR RF Channel 1		Config 1,4,7	SSB.1 FR1				As specified in clause A.3.10.1
		Config 2,5,8	SSB.1 FR1				
		Config 3,6,9	SSB.2 FR1				
CSI-RS for tracking parameters on NR RF Channel 1		Config 1,4,7	TRS.1.1 FDD				
		Config 2,5,8	TRS.1.1 TDD				
		Config 3,6,9	TRS.1.2 TDD				
SMTC-SSB parameters on NR RF Channel 2		Config 1,2,3	SSB.3 FR2				As specified in clause A.3.10.2
		Config 4,5,6	SSB.11 FR2				
		Config 7,8,9	SSB.12 FR2				
offsetMO	dB	Config 1,2,3,4,5,6,7,8,9	6				
Hysteresis	dB	Config 1,2,3,4,5,6,7,8,9	0				
a4-Threshold	dBm	Config 1,2,3,4,5,6,7,8,9	-105				
CP length		Config 1,2,3,4,5,6,7,7,8,9	Normal				
TimeToTrigger	s	Config 1,2,3,4,5,6,7,8,9	0				
Filter coefficient		Config 1,2,3,4,5,6,7,8,9	0				L3 filtering is not used

DRX		Config 1,2,3,4,5,6,7,8,9	DRX .1	DRX .7	DRX .1	DRX .7	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1,4,7	3ms				Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3,5,6,8,9	3μs				Synchronous cells.
T1	s	Config 1,2,3,4,5,6,7,8,9	5				
T2	s	Config 1,2,3,4,5,6,7,8,9	8 for PC1; 5 for other PC	82 for PC1; 52 for other PC	8 for PC1; 5 for other PC	82 for PC1; 52 for other PC	

Table A.7.6.2.19.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2-2 with SSB time index detection

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		Config 1,2,3,4,5,6,7,8,9	NA		Setup 1 as specified in clause A.3.15	
NR RF Channel Number		Config 1,2,3,4,5,6,7,8,9	1		2	
Duplex mode		Config 1,4,7	FDD		TDD	
		Config 2,3,5,6,8,9	TDD		TDD	
TDD configuration		Config 1,4,7	Not Applicable		TDDConf.3.1	
		Config 2,5,8	TDDConf.1.1		TDDConf.3.1	
		Config 3,6,9	TDDConf.2.1		TDDConf.3.1	
$BW_{channel}$	MHz	Config 1	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
		Config 2	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
		Config 3	40: $N_{RB,c}$ = 106		100: $N_{RB,c}$ = 66	
		Config 4	10: $N_{RB,c}$ = 52		400: $N_{RB,c}$ = 66	
		Config 5	10: $N_{RB,c}$ = 52		400: $N_{RB,c}$ = 66	
		Config 6	40: $N_{RB,c}$ = 106		400: $N_{RB,c}$ = 66	
		Config 7	10: $N_{RB,c}$ = 52		400: $N_{RB,c}$ = 33	
		Config 8	10: $N_{RB,c}$ = 52		400: $N_{RB,c}$ = 33	
		Config 9	40: $N_{RB,c}$ = 106		400: $N_{RB,c}$ = 33	
Data RBs allocated		Config 1	52		66	
		Config 2	52		66	
		Config 3	106		66	
		Config 4	52		66	
		Config 5	52		66	
		Config 6	106		66	
		Config 7	52		33	
		Config 8	52		33	
		Config 9	106		33	

BWP BW		MHz	Config 1	10: $N_{RB,c}$ = 52	100: $N_{RB,c}$ = 66
			Config 2	10: $N_{RB,c}$ = 52	100: $N_{RB,c}$ = 66
			Config 3	40: $N_{RB,c}$ = 106	100: $N_{RB,c}$ = 66
			Config 4	10: $N_{RB,c}$ = 52	400: $N_{RB,c}$ = 66
			Config 5	10: $N_{RB,c}$ = 52	400: $N_{RB,c}$ = 66
			Config 6	40: $N_{RB,c}$ = 106	400: $N_{RB,c}$ = 66
			Config 7	10: $N_{RB,c}$ = 52	400: $N_{RB,c}$ = 33
			Config 8	10: $N_{RB,c}$ = 52	400: $N_{RB,c}$ = 33
			Config 9	40: $N_{RB,c}$ = 106	400: $N_{RB,c}$ = 33
BWP configuration	Initial DL BWP		Config 1,2,3,4,5,6,7,8,9	DLBWP.0.1	N/A
	Initial UL BWP			ULBWP.0.1	N/A
	Dedicated DL BWP			DLBWP.1.1	N/A
	Dedicated UL BWP			ULBWP.1.1	N/A
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3,4,5,6,7,8,9	OP.1	OP.1
PDSCH Reference measurement channel			Config 1,4,7	SR.1.1 FDD	-
			Config 2,5,8	SR.1.1 TDD	
			Config 3,6,9	SR.2.1 TDD	
RMSI CORESET Reference Channel			Config 1,4,7	CR.1.1 FDD	-
			Config 2,5,8	CR.1.1 TDD	
			Config 3,6,9	CR.2.1 TDD	
Dedicated CORESET RMC configuration			Config 1,4,7	CCR.1.1 FDD	-
			Config 2,5,8	CCR.1.1 TDD	
			Config 3,6,9	CCR.2.1 TDD	
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1,4,7	SMTC.2	SMTC.2
			Config 2,3,5,6,8,9	SMTC.1	SMTC.1
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2,4,5,7,8	15	120
			Config 3,6,9	30	120
EPRE ratio of PSS to SSS			Config 1,2,3,4,5,6,7,8,9	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					

EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} Note2	dBm/15 kHz Note5		NA Link only, see clause A.3.7A	-104.7	
N_{oc} Note2	dBm/SCS Note4	Config 1,2,3		-95.7	
		Config 4,5,6		-89.7	
		Config 7,8,9		-86.7	
SSB_RP Note 3	dBm/SCS Note5	Config 1,2,3		-Infinity	-86.7
		Config 4,5,6		-Infinity	-80.7
		Config 7,8,9		-Infinity	-77.7
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4,5,6,7,8,9		-Infinity	9
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3,4,5,6,7,8,9		-Infinity	9
Io Note3	dBm/95.04 MHz Note5	Config 1,2,3,4,5,6,7,8,9		-66.7	-57.2
Propagation Condition		Config 1,2,3,4,5,6,7,8,9	AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SSB_RP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone

Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone

A.7.6.2.19.2 Test Requirements

In test 1 with per-UE gap and in test 3 without the gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X1 ms from the beginning of time period T2, where X1 is

For Configuration 1,2,3

15.84s (96*40ms*1.5+96*40ms*1.5+72*40ms*1.5) for UE supporting power class 1, or

10.08s (60*40ms*1.5+60*40ms*1.5+48*40ms*1.5) for UE supporting other power class.

For Configuration 4,5,6

21.6s (192*40ms*1.5+96*40ms*1.5+72*40ms*1.5) for UE supporting power class 1, or

13.68s (120*40ms*1.5+60*40ms*1.5+48*40ms*1.5) for UE supporting other power class.

For Configuration 7,8,9

27.36s (288*40ms*1.5+96*40ms*1.5+72*40ms*1.5) for UE supporting power class 1, or

17.28s (180*40ms*1.5+60*40ms*1.5+48*40ms*1.5) for UE supporting other power class.

In test 2 with per-UE gap and in test 4 without the gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X2 ms from the beginning of time period T2, where X2 is

For Configuration 1,2,3

168.69s (96*640ms+96*640ms+72*640ms) for UE supporting power class 1, or

107.52s (60*640ms+60*640ms+48*640ms) for UE supporting other power class.

For Configuration 4,5,6

230.4s (192*640ms+96*640ms+72*640ms) for UE supporting power class 1, or

145.92s (120*640ms+60*640ms+48*640ms) for UE supporting other power class.

For Configuration 7,8,9

291.84s (288*640ms+96*640ms+72*640ms) for UE supporting power class 1, or

184.32s (180*640ms+60*640ms+48*640ms) for UE supporting other power class.

In test 1, 2, 3 and 4 UE is required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.3 L1-RSRP measurement for beam reporting

A.7.6.3.1 SSB based L1-RSRP measurement when DRX is not used

A.7.6.3.1 SSB based L1-RSRP measurement when DRX is not used

A.7.6.3.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.1, with the testing configurations for NR cells in Table A.7.6.3.1.1-1.

The AoA setup for this test is Setup 1 as defined in clause A.3.15

Table A.7.6.3.1.1-1: Applicable NR configurations for FR2 SSB based L1-RSRP test

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.7.6.3.1.2 Test parameters

There is one cells in the test, the FR2 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.7.6.3.1.2-1 and Table A.7.6.3.1.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.7.6.3.1.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~2		freq1
Duplex mode	1~2		TDD
TDD Configuration	1~2		TDDConf.3.1
$BW_{channel}$	1~2	MHz	100: $N_{RB,c}$ = 66
Data RBs allocated	1~4		66
PDSCH Reference measurement channel	1		SR.3.2 TDD
	2		SR.3.3 TDD
RMSI CORESET Reference Channel	1		CR.3.1 TDD
	2		CR.3.2 TDD
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD
	2		CCR.3.7 TDD
SSB configuration	1		SSB.1 FR2
	2		SSB.2 FR2
OCNG Patterns	1~2		OP.1
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~2		DLBWP.1.3 ULBWP.1.3
SMTC configuration	1~2		SMTC.1
TRS Configuration	1~2		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~2		TCI.State.2
DRX configuration	1~2		Off
reportConfigType	1~2		periodic
reportQuantity	1~2		ssb-Index-RSRP
Number of reported RS	1~2		2
L1-RSRP reporting period	1~2	slot	320
T1	1~2	s	5
T2	1~2	s	2
EPRE ratio of PSS to SSS	1~2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~2		AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Table A.7.6.3.1.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
Angle of arrival configuration			Setup 1 according to A.3.15.1			
Beam Assumption Note 4	1-2		Rough			
N_{oc} Note2	1~2	dBm/15kHz	-105			
N_{oc} Note2	1	dBm/SSB SCS	-96			
	2		-93			
$\hat{E}_s / I_{ot}$	1~2	dB	0	0	-Infinity	9
SSB_RP Note3	1	dBm/SSB SCS	-96	-96	-Infinity	-87
	2		-93	-93	-Infinity	-84
Io Note3	1	dBm/95.04MHz	-63.97	-63.97	-66.98	-57.47
	2		-63.97	-63.97	-66.98	-57.47
$\hat{E}_s / N_{oc}$	1~2	dB	0	0	-Infinity	9

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.6.3.1.3 Test Requirements

The UE shall send L1-RSRP report every 320 slots. No later than X ms plus 320 slots from the beginning of time period T2, UE shall send L1-RSRP report including the results for both SSB#0 and SSB#1 while meeting the accuracy requirements defined in clause 10.1.20.1, where X is

- 1680 for UE supporting power class 1
- 1200 for UE supporting power class 2,3 or 4.

The reported L1-RSRP value shall include the Rx antenna gain in the range of -10 to +20 dB.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.6.3.2 SSB based L1-RSRP measurement when DRX is used

A.7.6.3.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.1, with the testing configurations for NR cells in Table A.7.6.3.2.1-1.

The AoA setup for this test is Setup 1 as defined in clause A.3.15

Table A.7.6.3.2.1-1: Applicable NR configurations for FR2 SSB based L1-RSRP test

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.7.6.3.2.2 Test parameters

There is one cells in the test, the FR2 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.7.6.3.2.2-1 and Table A.7.6.3.2.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.7.6.3.2.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~2		freq1
Duplex mode	1~2		TDD
TDD Configuration	1~2		TDDConf.3.1
$BW_{channel}$	1~2	MHz	100: $N_{RB,c}$ = 66
Data RBs allocated	1~2		66
PDSCH Reference measurement channel	1		SR.3.2 TDD
	2		SR.3.3 TDD
RMSI CORESET Reference Channel	1		CR.3.1 TDD
	2		CR.3.2 TDD
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD
	2		CCR.3.7 TDD
SSB configuration	1		SSB.1 FR2
	2		SSB.2 FR2
OCNG Patterns	1~2		OP.1
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~2		DLBWP.1.3 ULBWP.1.3
SMTC configuration	1~2		SMTC.1
TRS Configuration	1~2		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~2		TCI.State.2
DRX configuration	1~2		DRX.3
reportConfigType	1~2		periodic
reportQuantity	1~2		ssb-Index-RSRP
Number of reported RS	1~2		2
L1-RSRP reporting period	1~2	slot	320
T1	1~2	s	5
T2	1~2	s	3
EPRE ratio of PSS to SSS	1~2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			

EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~2		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.7.6.3.2.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
Angle of arrival configuration			Setup 1 according to A.3.15.1			
Beam Assumption Note 4	1-2		Rough			
N_{oc} Note2	1~2	dBm/15kHz	-105			
N_{oc} Note2	1	dBm/SSB SCS	-96			
	2		-93			
$\hat{E}_s/I_{ot}$	1~2	dB	0	0	-Infinity	9
SSB_RP Note3	1	dBm/SSB SCS	-96	-96	-Infinity	-87
	2		-93	-93	-Infinity	-84
Io Note3	1	dBm/95.04MHz	-63.97	-63.97	-66.98	-57.47
	2		-63.97	-63.97	-66.98	-57.47
$\hat{E}_s/N_{oc}$	1~2	dB	0	0	-Infinity	9
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						

A.7.6.3.2.3 Test Requirements

The UE shall send L1-RSRP report every 320 slots. No later than X ms plus 320 slots from the beginning of time period T2, UE shall send L1-RSRP report including the results for both SSB#0 and SSB#1 while meeting the accuracy requirements defined in clause 10.1.20.1, where X is

- 2880 for UE supporting power class 1
- 1920 for UE supporting power class 2,3 or 4.

The reported L1-RSRP value shall include the Rx antenna gain in the range of -10 to +20 dB.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.6.3.3 CSI-RS based L1-RSRP measurement when DRX is not used

A.7.6.3.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.2, with the testing configurations for NR cells in Table A.7.6.3.3.1-1.

Table A.7.6.3.3.1-1: Applicable NR configurations for FR2 CSI-RS based L1-RSRP test

Config	Description
1	NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.7.6.3.3.2 Test parameters

There is one cells in the test, the FR2 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.7.6.3.3.2-1 and Table A.7.6.3.3.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the CSI-RS and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-RSRP on aperiodic CSI-RS resources. UE is also configured to measure L1-RSRP based on SSB. After 480ms from the beginning of the test, the DCI trigger comes in slot 1 of a frame and UE provides the report back based on the reporting configuration as defined in Table A.7.6.3.3.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs.

Table A.7.6.3.3.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1		freq1
Duplex mode	1		TDD
TDD Configuration	1		TDDConf.3.1
$BW_{channel}$	1	MHz	100: $N_{RB,c}$ = 66
PDSCH Reference measurement channel	1		SR.3.1 TDD
RMSI CORESET Reference Channel	1		CR.3.1 TDD
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD
SSB configuration	1		SSB.1 FR2
CSI-RS configuration	1		CSI-RS.3.3 TDD
OCNG Patterns	1		OP.1
Initial BWP Configuration	1		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1		SMTC.1
TRS Configuration	1		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1		TCI.State.2
DRX configuration	1		Off
reportConfigType	1		aperiodic
reportQuantity	1		cri-RSRP

Number of reported RS	1		2
qcl-Info	1		SSB#0 for resource#0
			SSB#1 for resource#1
reportSlotOffsetList	1		8
Propagation condition	1		AWGN
T1	1	s	5
EPRE ratio of PSS to SSS	1	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.7.6.3.3.2-1: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
Angle of arrival configuration	1		Setup 1 according to A.3.15.1	
Beam Assumption Note 4	1		Rough	Rough
N_{oc} Note1	1	dBm/15kHz	-105	
N_{oc} Note1	1	dBm/SSB SCS	-95.97	
$\hat{E}_s / I_{ot}$	1	dB	0	9
CSI-RS RSRP Note2	1	dBm/SSB SCS	-95.97	-86.97
Io Note2	1	dBm/95.04MHz	-63.97	-57.47
$\hat{E}_s / N_{oc}$	1	dB	0	9
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.7.6.3.3.3 Test Requirements

After 480ms from the beginning of the test, the UE shall send L1-RSRP report at slot 8 from the reception of DCI triggering the L1-RSRP measurement. The L1-RSRP report shall include the results for both CSI-RS#0 and CSI-

RS#1 while meeting the accuracy requirements defined in clause 10.1.20.1. The reported L1-RSRP value shall include the Rx antenna gain in the range of [-10 ~ +20] dB.

For absolute accuracy of CSI-RS0 and absolute accuracy of CSI-RS1, the UE is deemed to meet the requirement if the reported L1-RSRP is in the range shown in Table A.7.6.3.3.3-1.

For relative accuracy of CSI-RS0 compared with CSI-RS1, the UE is deemed to meet the requirement if the difference in reported L1-RSRP meets the requirements in Table 10.1.20.2.2-1.

Table A.7.6.3.3.3-1: L1-RSRP absolute accuracy test requirement

	Test requirement Notes1,2,3
CSI-RS0	CSI-RS _RP0 -δ + G_{min} ≤ Reported RSRP(dBm) ≤CSI-RS _RP0 +δ + G_{max}
CSI-RS1	CSI-RS _RP1 -δ + G_{min} ≤ Reported RSRP(dBm) ≤CSI-RS _RP1 +δ + G_{max}
Note 1: CSI-RS_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the CSI-RS n under consideration	
Note 2: δ is the RSRP absolute accuracy requirement from Table 10.1.20.2.1-1, selected according to the Io used in the test	
Note 3: G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class	

A.7.6.3.4 CSI-RS based L1-RSRP measurement when DRX is used

A.7.6.3.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.2, with the testing configurations for NR cells in Table A.7.6.3.4.1-1.

Table A.7.6.3.4.1-1: Applicable NR configurations for FR2 CSI-RS based L1-RSRP test

Config	Description
1	NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.7.6.3.4.2 Test parameters

There is one cells in the test, the FR2 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.7.6.3.4.2-1 and Table A.7.6.3.4.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the CSI-RS and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-RSRP on aperiodic CSI-RS resources. UE is also configured to measure L1-RSRP based on SSB. After 1440ms from the beginning of the test, the DCI trigger comes in slot 1 of a frame and UE provides the report back based on the reporting configuration as defined in Table A.7.6.3.4.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs.

Table A.7.6.3.4.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1		freq1
Duplex mode	1		TDD
TDD Configuration	1		TDDConf.3.1
$BW_{channel}$	1	MHz	100: $N_{RB,c}$ = 66

PDSCH Reference measurement channel	1		SR.3.1 TDD
RMSI CORESET Reference Channel	1		CR.3.1 TDD
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD
SSB configuration	1		SSB.1 FR2
CSI-RS configuration	1		CSI-RS.3.3 TDD
OCNG Patterns	1		OP.1
Initial BWP Configuration	1		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1		SMTC.1
TRS Configuration	1		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1		TCI.State.2
DRX configuration	1		DRX.3
reportConfigType	1		aperiodic
reportQuantity	1		cri-RSRP
Number of reported RS	1		2
qcl-Info	1		SSB#0 for resource#0 SSB#1 for resource#1
reportSlotOffsetList	1		8
Propagation condition	1		AWGN
T1	1	s	5
EPRE ratio of PSS to SSS	1	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.7.6.3.4.2-1: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
Angle of arrival configuration	1		Setup 1 according to A.3.15.1	
Beam Assumption Note 4	1		Rough	Rough
N_{oc} Note1	1	dBm/15kHz	-105	
N_{oc} Note1	1	dBm/SSB SCS	-95.97	

$\hat{E}_s / I_{ot}$	1	dB	0	9
CSI-RS RSRP Note2	1	dBm/SSB SCS	-95.97	-86.97
Io Note2	1	dBm/95.04MHz	-63.97	-57.47
$\hat{E}_s / N_{oc}$	1	dB	0	9
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.7.6.3.3.3 Test Requirements

After 1440ms from the beginning of the test, the UE shall send L1-RSRP report at slot 8 from the reception of DCI triggering the L1-RSRP measurement. The L1-RSRP report shall include the results for both CSI-RS#0 and CSI-RS#1 while meeting the accuracy requirements defined in clause 10.1.20.1. The reported L1-RSRP value shall include the Rx antenna gain in the range of [-10 ~ +20] dB.

For absolute accuracy of CSI-RS0 and absolute accuracy of CSI-RS1, the UE is deemed to meet the requirement if the reported L1-RSRP is in the range shown in Table A.7.6.3.4.3-1.

For relative accuracy of CSI-RS0 compared with CSI-RS1, the UE is deemed to meet the requirement if the difference in reported L1-RSRP meets the requirements in Table 10.1.20.2.2-1.

Table A.7.6.3.4.3-1: L1-RSRP absolute accuracy test requirement

	Test requirement Notes1,2,3
CSI-RS0	CSI-RS _RP0 -δ + G_{min} ≤ Reported RSRP(dBm) ≤CSI-RS _RP0 +δ + G_{max}
CSI-RS1	CSI-RS _RP1 -δ + G_{min} ≤ Reported RSRP(dBm) ≤CSI-RS _RP1 +δ + G_{max}
Note 1: CSI-RS_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the CSI-RS n under consideration	
Note 2: δ is the RSRP absolute accuracy requirement from Table 10.1.20.2.1-1, selected according to the Io used in the test	
Note 3: G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class	

A.7.6.3.5 SSB based L1-RSRP measurement when DRX is used for power class 6 UE configured with *highSpeedMeasFlagFR2-r17*

A.7.6.3.5.1 Test Purpose and Environment

The purpose of this test is to verify that the power class 6 UE makes correct reporting of L1-RSRP measurement when *highSpeedMeasFlagFR2-r17* is configured. This test will partly verify the L1-RSRP measurement requirements for power class 6 UE configured with *highSpeedMeasFlagFR2-r17* in clause 9.5.4.1, with the testing configurations for NR cells in Table A.7.6.3.5.1-1.

The AoA setup for this test is Setup 1 as defined in clause A.3.15

Table A.7.6.3.5.1-1: Applicable NR configurations for FR2 SSB based L1-RSRP test for power class 6 UE configured with *highSpeedMeasFlag-r17*

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

2	NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.7.6.3.5.2 Test parameters

There is one cells in the test, the FR2 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.7.6.3.5.2-1 and Table A.7.6.3.5.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.7.6.3.5.2-1: General test parameters

Parameter	Config	Unit	Value
highSpeedMeasFlagFR2-r17	1~2		Set 1
SSB GSCN	1~2		freq1
Duplex mode	1~2		TDD
TDD Configuration	1~2		TDDConf.3.1
$BW_{channel}$	1~2	MHz	100: $N_{RB,c}$ = 66
Data RBs allocated	1~2		66
PDSCH Reference measurement channel	1		SR.3.2 TDD
	2		SR.3.3 TDD
RMSI CORESET Reference Channel	1		CR.3.1 TDD
	2		CR.3.2 TDD
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD
	2		CCR.3.7 TDD
SSB configuration	1		SSB.1 FR2
	2		SSB.2 FR2
OCNG Patterns	1~2		OP.1
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~2		DLBWP.1.3 ULBWP.1.3
SMTC configuration	1~2		SMTC.1
TRS Configuration	1~2		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~2		TCI.State.2
DRX configuration	1~2		DRX.3
reportConfigType	1~2		periodic
reportQuantity	1~2		ssb-Index-RSRP
Number of reported RS	1~2		2
L1-RSRP reporting period	1~2	slot	320
T1	1~2	s	5
T2	1~2	s	3
EPRE ratio of PSS to SSS	1~2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			

EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~2		AWGN 19444Hz
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.7.6.3.5.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
Angle of arrival configuration			Setup 1 according to A.3.15.1			
Beam Assumption Note 4	1-2		Rough			
N_{oc} Note2	1~2	dBm/15kHz	-105			
N_{oc} Note2	1	dBm/SSB SCS	-96			
	2		-93			
$\hat{E}_s / I_{ot}$	1~2	dB	0	0	-Infinity	9
SSB_RP Note3	1	dBm/SSB SCS	-96	-96	-Infinity	-87
	2		-93	-93	-Infinity	-84
Io Note3	1	dBm/95.04MHz	-63.97	-63.97	-66.98	-57.47
	2		-63.97	-63.97	-66.98	-57.47
$\hat{E}_s / N_{oc}$	1~2	dB	0	0	-Infinity	9
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						

A.7.6.3.5.3 Test Requirements

The UE shall send L1-RSRP report every 320 slots. No later than 720 ms plus 320 slots from the beginning of time period T2, UE shall send L1-RSRP report including the results for both SSB#0 and SSB#1 while meeting the accuracy requirements defined in clause 10.1.20.1.

The reported L1-RSRP value shall include the Rx antenna gain in the range of -10 to +20 dB.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.6.3.6 Inter-cell SSB based L1-RSRP measurements on FR2 SCell when DRX is not used

A.7.6.3.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.13.4.1, with the testing configurations for NR serving cell in Table A.7.6.3.6.1-1.

The AoA setup of FR2 cell for this test is Setup 3 as defined in clause A.3.15.

Table A.7.6.3.6.1-1: Applicable NR configurations for inter-cell SSB based L1-RSRP test in FR2

Config	Description
1	NR PCell 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode NR SCell 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	NR PCell 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode NR SCell 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
3	NR PCell 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR SCell 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
4	NR PCell 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode NR SCell 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
5	NR PCell 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode NR SCell 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
6	NR PCell 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR SCell 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.7.6.3.6.2 Test parameters

There are two cells in the test, Cell 1 is the serving cell in CA, including a FR1 PCC and FR2 SCC. Cell 2 is a FR2 cell with different PCI from Cell 1. The test parameters for Cell 1 are given in Table A.7.6.3.6.2-1. The test parameters for FR2 Cell (Cell 2) are given in Table A.7.6.3.6.2-2 and Table A.7.6.3.6.2-3.

SSB#0 and SSB#1 is transmitted on Cell 1 FR2 SCC and Cell 2.In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on SSB#0, and report measurement results periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. At the beginning of T2, SSB#1 starts transmission and the UE is configured for L1-RSRP measurement on SSB#1. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured in CSI-ReportConfig and *additionalPCIList* configured in *CSI-SSB-ResourceSet*.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD on Cell 1 in FR1 and perform L1-RSRP measurements on the SSB#0in FR2.

Table A.7.6.3.6.2-1: Cell specific test parameters for FR1 PCell

Parameter	Config	Unit	Value
SSB GSCN	1~6		freq1
Duplex mode	1,4		FDD
	2,5		TDD
	3,6		TDD
TDD Configuration	1,4		N/A
	2,5		TDDConf.1.1
	3,6		TDDConf.2.1
$BW_{channel}$	1,4	MHz	10: $N_{RB,c}$ = 52
	2,5		10: $N_{RB,c}$ = 52
	3,6		40: $N_{RB,c}$ = 106
PDSCH Reference measurement	1,4		SR.1.1 FDD

channel			
	2,5		SR.1.1 TDD
	3,6		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2,5		CR.1.1 TDD
	3,6		CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD
	2,5		CCR.1.1 TDD
	3,6		CCR.2.1 TDD
SSB configuration	1,4		SSB.3 FR1
	2,5		SSB.3 FR1
	3,6		SSB.4 FR1
OCNG Patterns	1~6		OP.1
Initial BWP Configuration	1~6		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~6		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~6		SMTC.1
CSI-RS for tracking	1,4		TRS.1.1 FDD
	2,5		TRS.1.1 TDD
	3,6		TRS.1.2 TDD
DRX configuration	1~6		Off
SSB index assigned as RLM RS	1~6		0,1
SSB Index assigned as BFD RS (q_0)	1~6		0
SSB Index assigned as CBD RS (q_1)	1~6		1
EPRE ratio of PSS to SSS	1~6	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} Note2	1~6	dBm/15 kHz	-104
$\hat{E}_s / I_{ot}$	1~6	dB	17
$\hat{E}_s / N_{oc}$	1~6	dB	17
SS-RSRP Note3	1~6	dBm/15 kHz	-87
Io Note3	1,2,4,5	dBm/ 9.36MHz	-58.96
	3,6	dBm/ 38.16MHz	-52.86
Propagation condition	1~6		AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modeled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselvess.

Table A.7.6.3.6.2-2: Cell specific test parameters for FR2 SCell

Parameter	Config	Unit	Value
SSB GSCN	1~6		Freq2
Duplex mode	1~6		TDD
TDD Configuration	1~2		TDDConf.3.1
$BW_{channel}$	1~6	MHz	100: $N_{RB,c}$ = 66
Data RBs allocated	1~6		66
PDSCH Reference measurement channel	1,2,3		SR.3.2 TDD
	4,5,6		SR.3.3 TDD
RMSI CORESET Reference Channel	1,2,3		CR.3.1 TDD
	4,5,6		CR.3.2 TDD
Dedicated CORESET Reference Channel	1,2,3		CCR.3.1 TDD
	4,5,6		CCR.3.7 TDD
SSB configuration	1,2,3		SSB.1 FR2
	4,5,6		SSB.2 FR2
OCNG Patterns	1~6		OP.1
Initial BWP Configuration	1~6		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~6		DLBWP.1.3 ULBWP.1.3
SMTC configuration	1~6		SMTC.1
TRS Configuration	1~6		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~6		TCI.State.2
DRX configuration	1~6		Off
reportConfigType	1~6		periodic
reportQuantity	1~6		ssb-Index-RSRP
Number of reported RS	1~6		2
SSB index associated to serving PCI	1~6		0
SSB index associated to a PCI different from serving cell	1~6		1
Timing offset between two SSBs associated to different PCI	1~6		<CP
L1-RSRP reporting period	1~6	slot	320
T1	1~6	s	5
T2	1~6	s	2
EPRE ratio of PSS to SSS	1~6	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~6		AWGN

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Table A.7.6.3.6.2-2: SSB specific test parameters for FR2 SCell

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
Angle of arrival configuration	1~6		Setup 3 according to A.3.15.3			
			AoA1		AoA2	
Beam Assumption Note 4	1~6		Rough		Rough	
N_{oc} Note2	1~6	dBm/15kHz	-105		-105	
N_{oc} Note2	1~3	dBm/SSB SCS	-96		-96	
	4~6		-93		-93	
$\hat{E}_s / I_{ot}$	1~2	dB	0	0	-Infinity	9
SSB_RP Note3	1	dBm/SSB SCS	-96	-96	-Infinity	-87
	2		-93	-93	-Infinity	-84
Io Note3	1	dBm/95.04MHz	-63.97	-63.97	-66.98	-57.47
	2		-63.97	-63.97	-66.98	-57.47
$\hat{E}_s / N_{oc}$	1~2	dB	0	0	-Infinity	9

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.6.3.6.3 Test Requirements

The UE shall send L1-RSRP report every 320 slots. No later than X ms plus 320 slots from the beginning of time period T2, UE shall send L1-RSRP report including the results for SSB#1 while meeting the accuracy requirements defined in clause 10.1.20.1, where X is

- 2160 for UE supporting power class 1
- 1680 for UE supporting power class 2, 3 or 4**.**

The reported L1-RSRP value shall include the Rx antenna gain in the range of -10 to +20 dB.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.6.3.7 SSB based L1-RSRP measurement for FR2-2 when DRX is used

A.7.6.3.7.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.1, with the testing configurations for NR cells in Table A.7.6.3.7.1-1.

The AoA setup for this test is Setup 1 as defined in clause A.3.15

Table A.7.6.3.7.1-1: Applicable NR configurations for FR2 SSB based L1-RSRP test

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	NR 480 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
3	NR 960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.7.6.3.7.2 Test parameters

There is one cells in the test, the FR2-2 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.7.6.3.7.2-1 and Table A.7.6.3.7.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.7.6.3.7.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~3		freq1
Duplex mode	1~3		TDD
TDD Configuration	1~3		TDDConf.3.1
$BW_{channel}$	1	MHz	100: $N_{RB,c}$ = 66
	2		400: $N_{RB,c}$ = 66
	3		400: $N_{RB,c}$ = 33
Data RBs allocated	1		66
	2		66
	3		33
PDSCH Reference measurement channel	1		SR.3.2 TDD
	2		TBD
	3		TBD
RMSI CORESET Reference Channel	1		CR.3.1 TDD
	2		TBD
	3		TBD
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD
	2		TBD
	3		TBD
SSB configuration	1		SSB.1 FR2
	2		TBD
	3		TBD
OCNG Patterns	1~3		OP.1
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~3		DLBWP.1.3 ULBWP.1.3
SMTC configuration	1~3		SMTC.1
TRS Configuration	1~3		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~3		TCI.State.2
DRX configuration	1~3		DRX.3
reportConfigType	1~3		periodic
reportQuantity	1~3		ssb-Index-RSRP
Number of reported RS	1~3		2

L1-RSRP reporting period	1	slot	TBD
	2		TBD
	3		TBD
T1	1~3	s	5
T2	1~3	s	3
EPRE ratio of PSS to SSS	1~3	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~3		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.7.6.3.7.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
Angle of arrival configuration			Setup 1 according to A.3.15.1			
Beam Assumption Note 4	1-2		Rough			
N_{oc} Note2	1~2	dBm/15kHz	-105			
N_{oc} Note2	1	dBm/SSB SCS	-96			
	2		-93			
$\hat{E}_s / I_{ot}$	1~2	dB	0	0	-Infinity	9
SSB_RP Note3	1	dBm/SSB SCS	-96	-96	-Infinity	-87
	2		-93	-93	-Infinity	-84
Io Note3	1	dBm/95.04MHz	-63.97	-63.97	-66.98	-57.47
	2		-63.97	-63.97	-66.98	-57.47
$\hat{E}_s / N_{oc}$	1~2	dB	0	0	-Infinity	9

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.6.3.7.3 Test Requirements

The UE shall send L1-RSRP report every TBD slots. No later than X ms plus TBD slots from the beginning of time period T2, UE shall send L1-RSRP report including the results for both SSB#0 and SSB#1 while meeting the accuracy requirements defined in clause 10.1.20.1, where X is

- TBD for UE supporting power class 1
- TBD for UE supporting power class 2,3 or 4.

The reported L1-RSRP value shall include the Rx antenna gain in the range of -10 to +20 dB.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.6.4 CLI measurements

A.7.6.4.1 SRS-RSRP measurement with non-DRX

A.7.6.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of SRS-RSRP measurement. This test will verify the SRS-RSRP measurement requirements in clause 9.7.2.5 with the testing configurations for NR cells in Table A.7.6.4.1.1-1.

Table A.7.6.4.1.1-1: Applicable NR configurations for FR2 SRS-RSRP test

Configuration	Description
1	NR 120 kHz SRS SCS, 100 MHz bandwidth, TDD duplex mode

A.7.6.4.1.2 Test Parameters

One cell is deployed in the test, which is FR2 PCell (Cell 1). The test parameters for PCell is given in Table A.7.6.4.1.2-1 ~ A.7.6.4.1.2-3 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event I1 is used. The test consists of two successive time periods, with time duration of T1 and T2, respectively.

During the test, the test system transmits SRS resource for measurement in the DL slot according to the SRS configuration in Table A.7.6.4.1.2-4 and the test parameters for the (virtual) neighbour cell UE in Table A. 7.6.4.1.2-3. During the test, the test system does not transmit PDCCH/PDSCH/OCNG on SRS symbol to be transmitted and on 2 data symbols before SRS to be transmitted.

Table A.7.6.4.1.2-1: General test parameters for SRS-RSRP event triggered reporting for PCell in FR2

Parameter	Unit	Test configuration	Value	Comment
Active cell		1	Cell 1	
RF Channel Number		1	1: Cell 1	
SSB configuration		1	SSB.1 FR2	
SMTC configuration		1	SMTC.1	
SRS configuration		1	SRSConf.1	Table A.7.6.4.1.2-4
CP length		1	Normal	
i1-Threshold	dBm	1	-103	
Hysteresis	dB	1	0	
Time To Trigger	s	1	0	
Filter coefficient		1	0	L3 filtering is not used
DRX	ms	1	OFF	Non-DRX

Time offset between DL from serving cell and SRS from test system	µs	1	10.67	
T1	s	1	5	
T2	s	1	1	

Table A.7.6.4.1.2-2: NR Cell specific test parameters for SA SRS-RSRP event triggered reporting for PCell in FR2

Parameter	Unit	Test configuration	Cell 1	
			T1	T2
TDD configuration		1	TDDConf.3.1	
PDSCH RMC configuration		1	SR.3.1 TDD	
RMSI CORESET RMC configuration		1	CR.3.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD	
OCNG Patterns		1	OP.1	
TRS configuration			TRS.2.1. TDD	
PDSCH/PDCCH TCI state		1	TCI.State.2	
Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1	DLBWP.1.1	
Active UL BWP configuration		1	ULBWP.1.1	
Propagation Condition		1	AWGN	

Table A.7.6.4.1.2-3: NR OTA Cell specific test parameters for SA SRS-RSRP event triggered reporting for PCell and neighbour cell UE in FR2

Parameter	Unit	Test configuration	Cell 1		Neighbour cell UE	
			T1	T2	T1	T2
AoA setup		1	Setup 1 defined in A.3.15.1			
Beam assumption Note 4		1	Fine			
N_{oc} Note 2	dBm/15 kHz	1	-98		-98	
N_{oc} Note 2	dBm/SCS	1	-89		-89	
$\hat{E}_s/I_{ot}$	dB	1	-	-	-infinity	4
$\hat{E}_s/N_{oc}$	dB	1	4	4	-infinity	4
SRS-RSRP Note 3	dBm/SCS kHz	1	-	-	-infinity	-94
Io	dBm/95.04 MHz	1	-61.36	-55.91	-70.01	-68.82

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SRS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.
Note 5 : Cell 2 doesn't transmit during the SRS and the 2 previous symbols. Es/NoC is not applied to those symbols.

Table A.7.6.4.1.2-4: SRS configuration for measurement reporting

	Field	SRSConf.1	Comments
SRS-ResourceSet	srs-ResourceSetId	0	
	srs-ResourceIdList	0	
	resourceType	Periodic	
	Usage	Codebook	
SRS-Resource	SRS-ResourceId	0	
	nrofSRS-Ports	Port1	
	transmissionComb	n2	
	combOffset-n2	0	
	cyclicShift-n2	0	
	resourceMapping startPosition	0	
	resourceMapping nrofSymbols	n1	
	resourceMapping repetitionFactor	n1	
	freqDomainPosition	0	
	freqDomainShift	0	
	freqHopping c-SRS	12	
	freqHopping b-SRS	0	
	freqHopping b-hop	0	
	groupOrSequenceHopping	Neither	
	resourceType	Periodic	
	periodicityAndOffset	sl40, 25	
	sequenceId	0	Any 10 bit number

A.7.6.4.1.3 Test Requirements

The UE shall send one Event I1 triggered measurement report, with a measurement reporting delay less than 60 ms from the beginning of time period T2.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.4.2 CLI-RSSI measurement with non-DRX

A.7.6.4.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of CLI-RSSI measurement. This test will verify the CLI-RSSI measurement requirements in clause 9.7.3.5 with the testing configurations for NR cells in Table A.7.6.4.2.1-1.

Table A.7.6.4.2.1-1: Applicable NR configurations for FR2 CLI-RSSI test

Configuration	Description
1	NR 120 kHz SCS, 100 MHz bandwidth, TDD duplex mode

A.7.6.4.2.2 Test Parameters

One cell is deployed in the test, which is FR2 PCell (Cell 1). The test parameters for PCell is given in Table A.7.6.4.2.2-1 ~ A.7.6.4.2.2-3 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event I1 is used. The test consists of two successive time periods, with time duration of T1 and T2, respectively.

During the test, the test system does not transmit PDCCH/PDSCH/OCNG on symbols for CLI-RSSI measurement resource and on 2 data symbols before. The CLI-RSSI measurement resource configuration is in Table A.7.6.4.2.2-4.

Table A.7.6.4.2.2-1: General test parameters for CLI-RSSI event triggered reporting for PCell in FR2

Parameter	Unit	Test configuration	Value	Comment
Active cell		1	NR Cell 1	
RF Channel Number		1	1: Cell 1	
SSB configuration		1	SSB.1 FR2	
SMTC configuration		1	SMTC.1	
CLI-RSSI configuration		1	CLI-RSSIConf.1	Table A.7.6.4.2.2-4
CP length		1	Normal	
i1-Threshold	dBm	1	-94.5	
Hysteresis	dB	1	0	
Time To Trigger	s	1	0	
Filter coefficient		1	0	L3 filtering is not used
DRX		1	OFF	Non-DRX
Time offset between DL from serving cell and OCNG from test system	μs	1	10.67	
T1	s	1	5	
T2	s	1	1	

Table A.7.6.4.2.2-2: NR Cell specific test parameters for CLI-RSSI event triggered reporting for PCell in FR2

Parameter	Unit	Test configuration	Cell 1	
			T1	T2
TDD configuration		1	TDDConf.3.1	
PDSCH RMC configuration		1	SR.3.1 TDD	
PUSCH parameters		1	N/A	
RMSI CORESET RMC configuration		1	CR.3.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD	
OCNG Patterns Note 1		1	OP.1	
TRS configuration			TRS.2.1. TDD	
PDSCH/PDCCH TCI state		1	TCI.State.2	
Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1	DLBWP.1.1	
Active UL BWP configuration		1	ULBWP.1.1	
Propagation Condition		1	AWGN	
Note 1: OCNG is not transmitted in the CLI-RSSI measurement resources.				

Table A.7.6.4.2.2-3: NR OTA Cell specific test parameters for CLI-RSSI event triggered reporting for PCell in FR2

Parameter	Unit	Test configuration	Cell 1	
			T1	T2
AoA setup		1	Setup 1 defined in A.3.15.1	
Beam assumption Note 3		1	Fine	Fine
N_{oc} on CLI-RSSI measurement resource Note 2	dBm/15 kHz	1	-119	-108
N_{oc} on CLI-RSSI measurement resource Note 2	dBm/SCS	1	-110	-99
Io on CLI-RSSI measurement resource	dBm/95.04 MHz	1	-81.01	-70.01
Io on CLI-RSSI measurement resource	dBm/1.08 MHz	1	-100.46	-89.46
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.				

Table A.7.6.4.2.2-4: CLI-RSSI measurement resource configuration for measurement reporting

	Field	CLI-RSSIConf.1
RSSI-Resource	rssi-ResourceId	0
	rssi-SCS	120
	startPRB	0
	nrofPRBs	66
	startPosition	3
	nrofSymbols	11
	rssi-PeriodicityAndOffset	sl40, 25

A.7.6.4.2.3 Test Requirements

The UE shall send one Event I1 triggered measurement report, with a measurement reporting delay less than 5ms from the beginning of time period T2. The nominal RSSI used to evaluate the requirement shall be based on Io.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.5 NR Measurements with autonomous gaps

A.7.6.5.1 SA interfrequency CGI reporting in autonomous gaps test (PCell in FR2)

A.7.6.5.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an CGI. This test will partly verify the SA inter-frequency NR cell search requirements in clause 8.2.1.2.16 and 9.11

In this test, there are two cells: NR cell 1 as PCell in FR2 on NR RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.7.6.5.1.1-1, A.7.6.5.1.1-2, and A.7.6.5.1.1-3.

Measurement gap patterns are configured. During T1 the UE shall report event A3 for cell 2. Within 3 seconds of the event report, the test equipment shall add a measurement reporting configuration using *ReportConfigNR* which containsa ReportCGI IE with cellForWhichToReportCGI set to the physical Cell ID of cell 2 and including the optional IE useAutonomousGaps-r16

In the measurement control information, it is indicated to the UE to decode the CGI of the neighbour cell using autonomous gaps. The test consists of two time phases, T1 and T2. Time period T2 begins 10ms after the test equipment has transmitted the RRC reconfiguration message containing the ReportCGI IE.

Supported test configurations are shown in table A.7.6.5.1.1-1.

Table A.7.6.5.1.1-1 SA interfrequency CGI reporting test in autonomous gaps

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.6.5.1.1-2: General test parameters for SA interfrequency CGI reporting in autonomous gaps

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1, 2	Two FR2 NR carrier frequencies is used.
Active cell		Config 1	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1	NR cell 2	NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1	13	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	39	
SMTC-SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
SI-RNTI scheduling rate	ms		40 ms	S-RNTI scheduled on four occasions per 160ms transmission period
A3-Offset	dB	Config 1	-30	

Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX		Config 1	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3μs	Synchronous cells.
T1	s	Config 1	<10	UE expected to report event A3 for cell 2 within 5,2s (PC1)or 3.5s (other PC) of the start of T1. Test equipment shall configure CGI reporting within 3s after receiving the event A3 report. T2 begins 10ms after test equipment has transmitted the RRC reconfiguration to configure CGI reporting.
T2	s	Config 1	1	

Table A.7.6.5.1.1-3: Cell specific test parameters SA interfrequency CGI reporting in autonomous gaps

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1	Setup 3 as specified in clause A.3.15			
				AoA1		AoA2	
Beam Assumption[Note 7]			1,2	Rough			
NR RF Channel Number			Config 1	1		2	
Duplex mode			Config 1	TDD		TDD	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP BW		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		Not sent	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120	

TRS configuration		Config 1	TRS.2.1 TDD	N/A
TCI configuration		Config 1	CSI-RS.Config.0	N/A
EPRE ratio of PSS to SSS		Config 1	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	dBm/15 kHz Note5		-99.03	-99.03
N_{oc} Note2	dBm/SCS Note4	Config 1	-90	-90
SS-RSRP Note 3	dBm/SCS Note5	Config 1	-87	-93
$\hat{E}_s/I_{ot}$	dB	Config 1	3	-3
$\hat{E}_s/N_{oc}$	dB	Config 1	3	-3
Io Note3	dBm/95.04 MHz Note5	Config 1	-56.25	-59.25
Propagation Condition		Config 1	AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone

Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone

Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.6.5.1.2 Test Requirements

The UE shall report the CGI of cell 2 within 25*Tsmtc + 6*Tsi-rnti+20ms +2ms= 762ms from the start of T2, allow 765ms. The rate of correct events observed during repeated tests shall be at least 90%.

The UE shall be scheduled continuously throughout the test, and from the start of T3 until 775 ms the number of interrupted slots shall not exceed the allowed number as defined in clause 8.2.2.2.14.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.6 L1-SINR measurement for beam reporting

A.7.6.6.1 L1-SINR measurement with CSI-RS based CMR and no dedicated IMR configured when DRX is not used

A.7.6.6.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-SINR measurement. This test will partly verify the L1-SINR measurement requirements in clause 9.8.4.1, with the testing configurations for NR cells in Table A.7.6.6.1.1-1.

Table A.7.6.6.1.1-1: Applicable NR configurations for FR2 CSI-RS based L1-SINR test

Config	Description
1	NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.7.6.6.1.2 Test parameters

There is one cells in the test, the FR2 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.7.6.6.1.2-1 and Table A.7.6.6.1.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-SINR measurement on the CSI-RS and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-SINR on aperiodic CSI-RS resources. After 160ms from the beginning of the test, the DCI trigger comes in slot 8 of a frame and UE provides the report back based on the reporting configuration as defined in Table A.7.6.6.1.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs.

Table A.7.6.6.1.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1		freq1
Duplex mode	1		TDD
TDD Configuration	1		TDDConf.3.1
$BW_{channel}$	1	MHz	100: $N_{RB,c}$ = 66
PDSCH Reference measurement channel	1		SR.3.1 TDD
RMSI CORESET Reference Channel	1		CR.3.1 TDD
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD
SSB configuration	1		SSB.1 FR2
CSI-RS configuration	1		CSI-RS.3.3 TDD
OCNG Patterns	1		OP.1
Initial BWP Configuration	1		DLBWP.0.1

			ULBWP.0.1
Dedicated BWP configuration	1		DLBWP.1.3 ULBWP.1.3
SMTC configuration	1		SMTC.1
TRS Configuration	1		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1		TCI.State.2
DRX configuration	1		Off
reportConfigType	1		aperiodic
reportQuantity	1		cri-SINR
reportQuantity-r16	1		cri-SINR-r16
Number of reported RS	1		2
qcl-Info	1		SSB#0 for resource#0 SSB#1 for resource#1
reportSlotOffsetList	1		26
Propagation condition	1		AWGN
T1	1	s	5
EPRE ratio of PSS to SSS	1	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.7.6.6.1.2-2: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
Angle of arrival configuration	1		Setup 1 according to A.3.15.1	
Beam assumption Note 3	1		Rough	
N_{oc} Note1	1	dBm/15kHz	-105	
N_{oc} Note1	1	dBm/SSB SCS	-95.97	
$\hat{E}_s / I_{ot}$	1	dB	0	9
CSI-RS RSRP Note3	1	dBm/SSB SCS	-95.97	-86.97
Io Note2	1	dBm/95.04MHz	-63.97	-57.47
$\hat{E}_s / N_{oc}$	1	dB	0	9
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 2: CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

Note 3:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.6.6.1.3 Test Requirements

After 160ms from the beginning of the test, the UE shall send L1-SINR report at slot 26 from the reception of DCI triggering the L1-SINR measurement. The L1-SINR report shall include the results for both CSI-RS#0 and CSI-RS#1 while meeting the accuracy requirements defined in clause 10.1.28.1.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.6.2 L1-SINR measurement with SSB based CMR and dedicated IMR when DRX is used

A.7.6.6.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-SINR measurement. This test will partly verify the L1-SINR measurement requirements in clause 9.8.4.2, with the testing configurations for NR cells in Table A.7.6.6.2.1-1.

The AoA setup for this test is Setup 1 as defined in clause A.3.15

Table A.7.6.6.2.1-1: Applicable NR configurations for FR2 L1-SINR measurement test with SSB based CMR and CSI-IM based IMR

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.7.6.6.2.2 Test parameters

There is one cells in the test, the FR2 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.7.6.6.2.2-1 and Table A.7.6.6.2.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-SINR measurement on the SSBs and the associated CSI-IM resources, and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD measurements based on the SSBs, and UE is configured to perform L1-SINR measurement based on the SSBs as CMR and the CSI-IM resources as IMR.

Table A.7.6.6.2.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~2		freq1
Duplex mode	1~2		TDD
TDD Configuration	1~2		TDDConf.3.1
$BW_{channel}$	1~2	MHz	100: $N_{RB,c}$ = 66

PDSCH Reference measurement channel	1~2		SR.3.1 TDD
RMSI CORESET Reference Channel	1~2		CR.3.1 TDD
Dedicated CORESET Reference Channel	1~2		CCR.3.1 TDD
SSB configuration	1		SSB.1 FR2
	2		SSB.2 FR2
CSI-IM configuration	1~2		CSI-IM.3.1 TDD
OCNG Patterns	1~2		OP.1
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~2		DLBWP.1.3 ULBWP.1.3
SMTC configuration	1~2		SMTC.1
TRS Configuration	1~2		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~2		TCI.State.2
DRX configuration	1~2		DRX.3
reportConfigType	1~2		periodic
reportQuantity-r16	1~2		ssb-Index-SINR-r16
Number of reported RS	1~2		2
L1-SINR reporting period	1~2	slot	640
T1	1~2	s	5
T2	1~2	s	2
Propagation condition	1~2		AWGN
EPRE ratio of PSS to SSS	1~2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~2		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.7.6.6.2.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
Angle of arrival configuration			Setup 1 according to A.3.15.1			
Beam assumption Note 4	1~2		Rough			
N_{oc} Note2	1~2	dBm/15kHz	-105			
N_{oc} Note2	1	dBm/SSB SCS	-96			
	2		-93			
$\hat{E}_s / I_{ot}$	1~2	dB	0	0	-Infinity	9
SSB RSRP Note3	1	dBm/SSB SCS	-96	-96	-Infinity	-87

	2		-93	-93	-Infinity	-84
Io Note3	1	dBm/95.04MHz	-64	-64	-67	-57.5
	2		-64	-64	-67	-57.5
$\hat{E}_s / N_{oc}$	1~2	dB	0	0	-Infinity	9

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SSB RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.6.6.2.3 Test Requirements

The UE shall send L1-SINR report every 640 slots. No later than X ms plus 640 slots from the beginning of time period T2, UE shall send L1-SINR report including the results for both SSB#0+CSI-IM#0 and SSB#1+CSI-IM#1 while meeting the accuracy requirements defined in clause 10.1.28.2, where X is

- 2880 for UE supporting power class 1
- 1920 for UE supporting power class 2,3 or 4.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.6.3 L1-SINR measurement with CSI-RS based CMR and dedicated IMR configured when DRX is used

A.7.6.6.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-SINR measurement. This test will partly verify the L1-SINR measurement requirements with CSI-RS based CMR and dedicated IMR cofigured in clause 9.8.4.3, with the testing configurations for NR cells in Table A.7.6.6.3.1-1.

Table A.7.6.6.3.1-1: Applicable NR configurations for FR2 L1-SINR test with CMR and dedicated IMR

Config	Description
1	LTE FDD, NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.7.6.6.3.2 Test parameters

There is one cells in the test, the FR2 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.7.6.6.3.2-1 and Table A.7.6.6.3.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-SINR measurement on the configured CSI-RS as CMR and an associated CSI-RS as IMR, and report aperiodically. The test consists of a single time period T1,

during which the UE is triggered via DCI to report L1-SINR on aperiodic CSI-RS resources and the associated IMR. UE is also configured to measure L1-SINR based on SSB. After 1440ms from the beginning of the test, the DCI trigger comes in slot 8 of a frame and UE provides the report back based on the reporting configuration as defined in Table A.7.6.6.3.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs, and UE is configured to perform L1-SINR measurement based on the CSI-RS as CMR and the CSI-RS as IMR.

Table A.7.6.6.3.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1		freq1
Duplex mode	1		TDD
TDD Configuration	1		TDDConf.3.1
$BW_{channel}$	1	MHz	100: $N_{RB,c}$ = 66
PDSCH Reference measurement channel	1		SR.3.1 TDD
RMSI CORESET Reference Channel	1		CR.3.1 TDD
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD
SSB configuration	1		SSB.1 FR2
CSI-RS as CMR configuration	1		CSI-RS.3.3 TDD
CSI-RS as IMR configuration	1		CSI-RS.3.2A TDD
OCNG Patterns	1		OP.1
Initial BWP Configuration	1		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1		DLBWP.1.3 ULBWP.1.3
SMTC configuration	1		SMTC.1
TRS Configuration	1		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1		TCI.State.2
DRX configuration	1		DRX.3
reportConfigType	1		aperiodic
reportQuantity-r16	1		cri-SINR-r16
Number of reported RS	1		2
qcl-Info	1		SSB#0 for resource#0 SSB#1 for resource#1
reportSlotOffsetList	1		26
T1	1	s	5
EPRE ratio of PSS to SSS	1	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1		AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Table A.7.6.6.3.2-2: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
Angle of arrival configuration	1~2		Setup 1 according to A.3.15.1	
Assumption for UE beams Note 3	1~2		Rough	
N_{oc} Note1	1~2	dBm/15kHz	-105	
N_{oc} Note1	1~2	dBm/SSB SCS	-95.97	
$\hat{E}_s / I_{ot}$	1~2	dB	0	9
CSI-RS RSRP Note2	1~2	dBm/SSB SCS	-95.97	-86.97
Io Note2	1~2	dBm/95.04MHz	-63.97	-57.47
$\hat{E}_s / N_{oc}$	1~2	dB	0	9

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 2: CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 3: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.6.6.3.3 Test Requirements

After 1440ms from the beginning of the test, the UE shall send L1-SINR report at slot 26 from the reception of DCI triggering the L1-SINR measurement. The L1-SINR report shall include the results for both CSI-RS#0 as CMR + CSI-RS#0 as IMR and CSI-RS#1 as CMR + CSI-RS#1 as IMR while meeting the accuracy requirement in clause 10.1.28.3. The reported L1-SINR value shall consider the Rx antenna gain in the range of [-10 ~ +20] dB when calculated.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.7 CSI-RS based intra-frequency Measurements

A.7.6.7.1 SA event triggered reporting test without gap under DRX for CSI-RS based intra-frequency measurement

A.7.6.7.1.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency measurement requirements in clause 9.10.2 and 9.10.3. Supported test configurations are shown in table A.7.6.7.1.1-1.

Table A.7.6.7.1.1-1: supported test configurations

Configuration	Description

1	120 kHz SSB and CSI-RS SCS, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.7.6.7.1.1-2 ~ 6.

In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furhtermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.7.6.7.1.1-2: General test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 without gap with DRX

Parameter	Unit	Config	Value	Comment
			Test 1	
Active cell		1	PCell (Cell 1)	
Neighbour cell		1	Cell 2	Cell to be identified.
RF Channel Number		1	1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
CSI-RS resource configuration		1	CSI-RS.RRM.FR2.1 TDD	
A3-Offset	dB	1	-6	
CP length		1	Normal	
Hysteresis	dB	1	0	
Time To Trigger	s	1	0	
Filter coefficient		1	0	L3 filtering is not used
DRX		1	DRX.1	DRX related parameters are defined in Table A.3.3
Time offset between Cell 1 and Cell 2	µs	1	0.58	
T1	s	1	5	
T2	s	1	10	

Table A.7.6.7.1.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 without gap with DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Intial BWP configuration		1	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1	SSB		SSB	
PDSCH RMC configuration		1	SR.3.1 TDD		N/A	

RMSI CORESET RMC configuration		1	CR.3.1 TDD	CR.3.1 TDD
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD	CCR.3.1 TDD
TRS configuration		1	TRS.2.1 TDD	N/A
PDSCH/PDCCH TCI states		1	TCI.State.2	N/A
OCNG Patterns		1	OP.1	OP.1
SMTC		1	SMTC.1	
SSB		1	SSB.3 FR2	SSB.3 FR2
CSI-RS		1	CSI-RS.RRM.FR2.1 TDD	
Propagation Condition		1	AWGN	

Table A.7.6.7.1.1-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 without gap with DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1	Setup 1 defined in A.3.15.1			
Beam assumption Note 4		1	Fine		Fine	
$\hat{E}_s/I_{ot}$	dB	1	4	-1.46	-Infinity	-1.46
N_{oc} Note 2	dBm/15 KHz	1	-98			
N_{oc} Note 2	dBm/SCS	1	-86			
CSI-RSRP	dBm/SCS	1	-82	-82	-Infinity	-82
SS-RSRP	dBm/SCS	1	-82	-82	-Infinity	-82
$\hat{E}_s/N_{oc}$	dB	1	4	4	-Infinity	4
Io	dBm/95.04MHz	1	-54.53	-52.18	-54.53	-52.18

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: CSI-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Information about types of UE beam is given in B.2.1, and does not limit UE implementation or test system implementation.

A.7.6.7.1.2 Test Requirements

In this test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X1 ms from the beginning of time period T2, where X1 is

- 9.6s for a UE supporting power class 1,
- 5.76s for a UE supporting power class 2, 3 and 4

The UE is required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.8 CSI-RS based inter-frequency Measurements

A.7.6.8.1 SA event triggered reporting tests for FR2 CSI-RS based measurement when non-DRX is used (PCell in FR2)

A.7.6.8.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event for CSI-RS based L3 measurement. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.10.3.5.

In this test, there are two cells: NR cell 1 as PCell in FR2 on NR RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.7.6.8.1.1-1, A.7.6.8.1.1-2, and A.7.6.8.1.1-3.

In test 1&2 measurement gap pattern configuration # 13 as defined in Table A.7.6.8.1.1-2 is provided for UE that does not support per-FR gap and for UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Supported test configurations are shown in table A.7.6.8.1.1-1.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furhtermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.7.6.8.1.1-1: SA event triggered reporting tests for CSI-RS based L3 measurement for FR2-FR2

Config	Description
1	120 kHz SSB and CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.6.8.1.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2 CSI-RS based L3 measurement

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1, 2	Two FR2 NR carrier frequencies is used.
Active cell		Config 1	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1	NR cell 2	NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1	13	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	39	

SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
SMTC configuration		Config 1	SMTC.1	As specified in clause A.3.11
A3-Offset	dB	Config 1	-6	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX		Config 1	OFF	DRX is not used
Time offset between serving and neighbour cells	µs	Config 1	0.58	Synchronous cells.
T1	s	Config 1	5	
T2	s	Config 1	7 for PC1; 4.5 for other PC	

Table A.7.6.8.1.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2 CSI-RS based L3 measurement

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1	Setup 1 as specified in clause A.3.15			
Beam Assumption[Note 7]			Config 1	Rough		Rough	
NR RF Channel Number			Config 1	1		2	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
Duplex mode			Config 1	TDD		TDD	
$BW_{channel}$		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP BW		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120	
TRS configuration			Config 1	TRS.2.1 TDD		N/A	
TCI configuration			Config 1	CSI-RS.Config.0		N/A	
CSI-RS configuration for RRM				-		CSI-RS.RRM.FR2.1 TDD	
EPRE ratio of PSS to SSS			Config 1	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							

EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15 kHz Note5		-104.7		-104.7	
N_{oc} Note2	dBm/SCS Note4	Config 1	-95.7		-95.7	
CSI-RSRP Note 3	dBm/SCS Note5	Config 1	-89.7	-89.7	-Infinity	-86.7
SS-RSRP Note 3	dBm/SCS Note5	Config 1	-89.7	-89.7	-Infinity	-86.7
$\hat{E}_s/I_{ot}$	dB	Config 1	6	6	-Infinity	9
$\hat{E}_s/N_{oc}$	dB	Config 1	6	6	-Infinity	9
Io Note3	dBm/95.04 MHz Note5	Config 1	-59.7	-59.7	-66.7	-57.2
Propagation Condition		Config 1	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: CSI-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone

Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone

Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.

A.7.6.8.1.2 Test Requirements

In the test the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X1 ms from the beginning of time period T2, where X1 is

6720 for UE supporting power class 1, or

4160 for UE supporting other power class

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.9 RSTD measurements

A.7.6.9.1 NR RSTD measurement reporting delay test case for single positioning frequency layer in FR2 SA

A.7.6.9.1.1 Test Purpose and Environment

The purpose of the test is to verify that the RSTD measurement meets the requirements specified in Clause 9.9.2 in an environment with AWGN propagation conditions in FR2 in standalone scenario when single positioning frequency layer is configured.

Supported test configurations are shown in table A.7.7.1.1-1. The test parameters are as given in Table 7.6.7.1.1-2, Table A.7.6.9.1.1-3 and , Table A.7.6.9.1.1-4.

Table A.7.6.9.1.1-1: Supported test configurations for NR RSTD

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

In the test there are three synchronous cells: Cell 1, Cell 2 and Cell 3. Cell 1 is the reference as well as the PCell. Cell 2 and Cell 3 are the neighbour cells. All cells are on the same RF channel distributed in single positioning frequency layers.

The test consists of two consecutive time intervals, with duration of T1 and T2. During time duration T1, the UE shall not have any timing information of Cell 2 and Cell 3. All three cells transmit PRS during T2.

Note: The information on when PRS is muted is conveyed to the UE using PRS muting information.

The *NR-DL-TDOA-ProvideAssistanceData* and *nr-DL-TDOA-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where $\Delta T = 50$ ms is the maximum processing time of the *DL-TDOA assistance* data and location information request.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance containing the PRS resources.

The UE is configured with measurement gap pattern ID # 24 or #13 before T2.

Table A.7.6.9.1.1-2: General test parameters for RSTD measurement reporting delay

Parameter	Unit	Value	Comment
Reference cell		Cell 1	Reference cell is the cell in the DL-TDOA assistance data with respect to which the RSTD measurement is defined, as specified in TS 38.215 [4] and TS 37.355 [34]. The reference cell is the PCell in this test case.
Neighbor cells		Cell 2 and Cell 3	Cell 2 and Cell 3 appear at the first and second places in the neighbour cell list in the DL-TDOA assistance data.

SSB configuration	Config 1		SSB.3 FR2	
SMTC configuration	Config 1		SMTC.1	
PDSCH RMC configuration	Config 1		SR.1.1 FDD	
RMSI CORESET RMC configuration	Config 1		CR.3.1 TDD	As specified in clause A.3.1.2.1
Dedicated CORESET RMC configuration	Config 1		CCR.1.1 FDD	
PRS Configuration	Config 1		PRS.1.1. FR2	As specified in clause A.3.31
Physical cell ID PCI			(PCI of Cell 1 – PCI of Cell 2)mod6=0 and (PCI of Cell 1 – PCI of Cell 3)mod6=0	The cell PCIs are selected such that the relative shifts of PRS patterns among cells are as given by the test parameters
CP length			Normal	
DRX			OFF	
Measurement gap			GP#24 or GP#13	GP#24 is configured if UE supports MG#24, otherwise GP#13 is configured
Radio frame receive time offset between the cells at the UE antenna connector		µs	Cell 2 to Cell 1: 0 Cell 3 to Cell 1: 3	PRS are transmitted from synchronous cells
Expected RSTD		µs	Cell 2: 3 Cell 3: 3 Other neighbour cells: randomly between -3 and 3	The expected RSTD is what is expected at the receiver. The corresponding parameter in the DL-TDOA assistance data specified in TS 37.355 [34] is the expectedRSTD indicator
Expected RSTD uncertainty for all neighbour cells		µs	5	The corresponding parameter in the DL-TDOA assistance data specified in TS 37.355 [34] is the expectedRSTD-Uncertainty index
Number of cells provided in DL-TDOA assistance data			16	Including the reference cell
PRS muting info			Cell 1: ‘10’ Cell 2: ‘01’ Cell 3: ‘10’	Correponds to prs-MutingInfo defined in TS 37.355 [24]
PRS resource RE offset			Cell 1: 0 Cell 2: 0 Cell 3: 1	Cell 1 and Cell 3 are configured with different resource offsets
T1		s	3	The length of the time interval from the beginning of each test

T2	s	1.28	The length of the time interval that follows immediately after time interval T1
AoA setup		Setup 1	As defined in A.3.15.1
Beam assumption		Rough	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Table A.7.6.9.1.1-3: Cell-specific test parameters for RSTD measurement reporting delay during T1

Parameter		Unit	Cell 1	Cell 2	Cell 3
NR RF Channel Number			1	1	1
Positiong frequency layer			1	1	1
$BW_{channel}$		MHz	100: $N_{RB,c}$ = 66	100: $N_{RB,c}$ = 66	100: $N_{RB,c}$ = 66
Correlation Matrix and Antenna Configuration			1x2 Low	1x2 Low	1x2 Low
OCNG patterns defined in A.3.2.1			OP.1	N/A	N/A
EPRE ratio of PSS to SSS		dB	0	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} Note 3	Config 1	dBm/SCS	-89		
PRS $\hat{E}_s/N_{oc}$		dB	-Infinity	-Infinity	-Infinity
Io Note 4	Config 1	dBm/ 95.04MHz	-57.00	-57.00	-57.00
SSB_RP Note4	Config 1	dBm/SCS	-89	-Infinity	-Infinity
SSB $\hat{E}_s/N_{oc}$	Config 1	dB	0	-Infinity	-Infinity
Propagation Condition			AWGN		

Note 1:	OCNG shall be used such that active cell (Cell 1) is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols other than those in the slots with transmitted PRS.
Note 2:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 3:	Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 4:	SSB_RP and Io levels have been derived from other parameters and are given for information purpose. These are not settable test parameters.

Table A.7.6.9.1.1-4: Cell-specific test parameters for RSTD measurement reporting delay during T2

Parameter	Unit	Cell 1	Cell 2	Cell 3
		T2	T2	T2
RF Channel Number		1	1	1
Positiong frequency layer		1	1	1
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66	100: $N_{RB,c}$ = 66	100: $N_{RB,c}$ = 66
Correlation Matrix and Antenna Configuration		1x2 Low	1x2 Low	1x2 Low
OCNG patterns defined in A.3.2.1		OP.1	OP.1	OP.1
EPRE ratio of PSS to SSS	dB	0	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
EPRE ratio of PRS to SSS				
PRACH configuration		FR2 PRACH configuration 1	FR2 PRACH configuration 1	FR2 PRACH configuration 1

N_{oc} Note 3	Config 1	dBm/SCS	-89	-89	-89
PRS $\hat{E}_s/N_{oc}$	Config 1	dB	-5.44	-11.67	-11.67
Io Note4	Config 1	dBm/ 95.04MHz	-58.48	-58.48	-58.48
PRS $\hat{E}_s/I_{ot}$		dB	-6	-13	-13
PRP Note 4		dBm/SCS	-94	-101	-101
Propagation Condition			AWGN		

Note 1: OCNG shall be used such that active cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols other than those in the slots with transmitted PRS.

Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 3: Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 4: PRP and Io levels have been derived from other parameters and are given for information purpose. These are not settable test parameters. The Io is calculated based only on the symbols in which PRS is transmitted.

Table A.7.6.9.1.-5: Void

A.7.6.9.1.2 Test Requirements

The RSTD measurement time fulfils the requirements specified in Clause 9.9.2.5.

The UE shall perform and report the RSTD measurements for Cell 2 and Cell 3 with respect to the reference cell in the DL-TDOA assistance data, Cell 1, within the time duration specified in section 9.9.1.5 starting from the beginning of time interval T2.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported RSTD measurement for each correct event shall be within the RSTD reporting range specified in Clause 10.1.23.3, i.e., between RSTD_0000000 and RSTD_1970049.

A.7.6.9.2 NR RSTD measurement reporting delay test case for dual positioning frequency layers in FR2 SA

A.7.6.9.2.1 Test Purpose and Environment

The purpose of the test is to verify that the RSTD measurement meets the requirements specified in Clause 9.9.2 in an environment with AWGN propagation conditions in FR2 in standalone scenario when dual positioning frequency layer is configured.

Supported test configurations are shown in table A.7.6.9.2.1-1. The test parameters are as given in Table 7.6.7.2.1-2, Table A.7.6.9.2.1-3 and , Table A.7.6.9.2.1-4.

Table A.7.6.9.2.1-1: Supported test configurations for NR RSTD

Configuration	Description

1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

In the test there are three synchronous cells: Cell 1, Cell 2 and Cell 3. Cell 1 is the reference as well as the PCell. Cell 2 and Cell 3 are the neighbour cells. All cells are on the 2 RF channels distributed in dual positioning frequency layers.

The test consists of two consecutive time intervals, with duration of T1 and T2. During time duration T1, the UE shall not have any timing information of Cell 2 and Cell 3. All three cells transmit PRS during T2.Note: The information on when PRS is muted is conveyed to the UE using PRS muting information.

The *NR-DL-TDOA-ProvideAssistanceData* and *nr-DL-TDOA-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where ΔT = 50 ms is the maximum processing time of the *DL-TDOA assistance* data and location information request.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance containing the PRS resources.

The UE is configured with measurement gap pattern ID # 24 or #13 before T2.

Table A.7.6.9.2.1-2: General test parameters for RSTD measurement reporting delay

Parameter		Unit	Value	Comment
Reference cell			Cell 1	Reference cell is the cell in the DL-TDOA assistance data with respect to which the RSTD measurement is defined, as specified in TS 38.215 [4] and TS 37.355 [34]. The reference cell is the PCell in this test case.
Neighbor cells			Cell 2 and Cell 3	Cell 2 and Cell 3 appear at the first place in the respective neighbour cell list in the DL-TDOA assistance data for two positioning frequency layers.
SSB configuration	Config 1		SSB.3 FR2	
SMTC configuration	Config 1		SMTC.1	
PDSCH RMC configuration	Config 1		SR.1.1 FDD	
RMSI CORESET RMC configuration	Config 1		CR.3.1 TDD	As specified in clause A.3.1.2.1
Dedicated CORESET RMC configuration	Config 1		CCR.1.1 FDD	
PRS Configuration	Config 1		PRS.1.1. FR2	As specified in clause A.3.31

Physical cell ID PCI		(PCI of Cell 1 – PCI of Cell 2)mod6=0 and (PCI of Cell 1 – PCI of Cell 3)mod6=0	The cell PCIs are selected such that the relative shifts of PRS patterns among cells are as given by the test parameters
CP length		Normal	
DRX		OFF	
Measurement gap		GP#24 or GP#13	GP#24 is configured if UE supports MG#24, otherwise GP#13 is configured
Radio frame receive time offset between the cells at the UE antenna connector	µs	Cell 2 to Cell 1: 0 Cell 3 to Cell 1: 3	PRS are transmitted from synchronous cells
Expected RSTD	µs	Cell 2: 3 Cell 3: 3 Other neighbour cells: randomly between -3 and 3	The expected RSTD is what is expected at the receiver. The corresponding parameter in the DL-TDOA assistance data specified in TS 37.355 [34] is the expectedRSTD indicator
Expected RSTD uncertainty for all neighbour cells	µs	5	The corresponding parameter in the DL-TDOA assistance data specified in TS 37.355 [34] is the expectedRSTD-Uncertainty index
Number of cells provided in DL-TDOA assistance data		4	Including the reference cell
PRS muting info		Cell 1: ‘10’ Cell 2: ‘01’ Cell 3: ‘10’	Correponds to prs-MutingInfo defined in TS 37.355 [24]
PRS resource RE offset		Cell 1: 0 Cell 2: 0 Cell 3: 1	Cell 1 and Cell 3 are configured with different resource offsets
T1	s	3	The length of the time interval from the beginning of each test
T2	s	1.28	The length of the time interval that follows immediately after time interval T1
AoA setup		Setup 1	As defined in A.3.15.1
Beam assumption		Rough	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Table A.7.6.9.2.1-3: Cell-specific test parameters for RSTD measurement reporting delay during T1

Parameter	Unit	Cell 1	Cell 2	Cell 3
NR RF Channel Number		1	1	2
Positiong frequency layer		1	1	2
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66	100: $N_{RB,c}$ = 66	100: $N_{RB,c}$ = 66
Correlation Matrix and Antenna Configuration		1x2 Low	1x2 Low	1x2 Low
OCNG patterns defined in A.3.2.1		OP.1	N/A	N/A
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				

EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} Note 3	Config 1	dBm/SCS	-89		
PRS $\hat{E}_s/N_{oc}$		dB	-Infinity	-Infinity	-Infinity
Io Note 4	Config 1	dBm/95.04MHz	-57.00	-57.00	-60.01
SSB_RP Note4	Config 1	dBm/SCS	-89	-Infinity	-Infinity
SSB $\hat{E}_s/N_{oc}$		dB	0	-Infinity	-Infinity
Propagation Condition			AWGN		

Note 1: OCNG shall be used such that active cell (Cell 1) is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols other than those in the slots with transmitted PRS.

Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 3: Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 4: SSB_RP and Io levels have been derived from other parameters and are given for information purpose. These are not settable test parameters.

Table A.7.6.9.2.1-4: Cell-specific test parameters for RSTD measurement reporting delay during T2

Parameter	Unit	Cell 1	Cell 2	Cell 3
		T2	T2	T2
RF Channel Number		1	1	2
Positiong frequency layer		1	1	2
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66	100: $N_{RB,c}$ = 66	100: $N_{RB,c}$ = 66
Correlation Matrix and Antenna Configuration		1x2 Low	1x2 Low	1x2 Low
OCNG patterns defined in A.3.2.1		OP.1	OP.1	OP.1
EPRE ratio of PBCH DMRS to SSS	dB	0	0	0
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				

EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
EPRE ratio of PRS to SSS					
PRACH configuration			FR2 PRACH configuration 1	FR2 PRACH configuration 1	FR2 PRACH configuration 1
N_{oc} Note 3	Config 1	dBm/SCS	-89	-89	-89
PRS $\hat{E}_s/N_{oc}$	Config 1	dB	-5.7	-11.9	-13
Io Note4	Config 1	dBm/ 95.04MHz	-58.70	-58.70	-59.73
PRS $\hat{E}_s/I_{ot}$		dB	-6	-13	-13
PRP Note 4		dBm/SCS kHz	-94	-101	-102
Propagation Condition			AWGN		

Note 1: OCNG shall be used such that active cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols other than those in the slots with transmitted PRS.

Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 3: Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 4: PRP and Io levels have been derived from other parameters and are given for information purpose. These are not settable test parameters. The Io is calculated based only on the symbols in which PRS is transmitted.

Table A.7.6.9.2.1-5: Void

A.7.6.9.2.2 Test Requirements

The RSTD measurement time fulfils the requirements specified in Clause 9.9.2.5.

The UE shall perform and report the RSTD measurements for Cell 2 and Cell 3 with respect to the reference cell in the DL-TDOA assistance data, Cell 1, within the time duration specified in section 9.9.1.5 starting from the beginning of time interval T2.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported RSTD measurement for each correct event shall be within the RSTD reporting range specified in Clause 10.1.23.3, i.e., between RSTD_0000000 and RSTD_1970049.

A.7.6.9.3 NR RSTD measurement reporting delay test case for single positioning frequency layer with reduced number of samples in FR2 SA

A.7.6.9.3.1 Test Purpose and Environment

The purpose of the test is to verify that the RSTD measurement meets the requirements specified in Clause 9.9.2 in an environment with AWGN propagation conditions in FR2 in standalone scenario when single positioning frequency layer is configured. In this test PRS is transmitted within the active BWP of the UE.

Supported test configurations are shown in table A.7.6.9.3.1-1. The test parameters are as given in Table 7.6.9.3.1-2, Table A.7.6.9.3.1-3 and , Table A.7.6.9.3.1-4.

Table A.7.6.9.3.1-1: Supported test configurations for NR RSTD

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

In the test there are three synchronous cells: Cell 1, Cell 2 and Cell 3. Cell 1 is the reference as well as the PCell. Cell 2 and Cell 3 are the neighbour cells. All cells are on the same RF channel distributed in single positioning frequency layers.

The test consists of two consecutive time intervals, with duration of T1 and T2. During time duration T1, the UE shall not have any timing information of Cell 2 and Cell 3. All three cells transmit PRS during T2.

Note: The information on when PRS is muted is conveyed to the UE using PRS muting information.

The *NR-DL-TDOA-ProvideAssistanceData* and *nr-DL-TDOA-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where ΔT = 50 ms is the maximum processing time of the *DL-TDOA assistance* data and location information request. UE can support *supportedDL-PRS-ProcessingSamples-RRC-CONNECTED*, and the LMF indicates the UE to perform positioning measurements with reduced number of samples N_{sample} via *reducedDL-PRS-ProcessingSamples*.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance containing the PRS resources.

The UE is configured with measurement gap pattern ID # 24 or #13 before T2.

Table A.7.6.9.3.1-2: General test parameters for RSTD measurement reporting delay

Parameter	Unit	Value	Comment
Reference cell		Cell 1	Reference cell is the cell in the DL-TDOA assistance data with respect to which the RSTD measurement is defined, as specified in TS 38.215 [4] and TS 37.355 [34]. The reference cell is the PCell in this test case.

Neighbor cells			Cell 2 and Cell 3	Cell 2 and Cell 3 appear at the first and second places in the neighbour cell list in the DL-TDOA assistance data.
SSB configuration	Config 1		SSB.2 FR2	
SMTC configuration	Config 1		SMTC.1	
PDSCH RMC configuration	Config 1		SR.1.1 FDD	
RMSI CORESET RMC configuration	Config 1		CR.3.1 TDD	As specified in clause A.3.1.2.1
Dedicated CORESET RMC configuration	Config 1		CR.1.1 FDD	
PRS Configuration	Config 1		PRS.1.2. FR2	As specified in clause A.3.31
Physical cell ID PCI			(PCI of Cell 1 – PCI of Cell 2)mod6=0 and (PCI of Cell 1 – PCI of Cell 3)mod6=0	The cell PCIs are selected such that the relative shifts of PRS patterns among cells are as given by the test parameters
CP length			Normal	
DRX			OFF	
Measurement gap			GP#24 or GP#13	GP#24 is configured if UE supports MG#24, otherwise GP#13 is configured
Radio frame receive time offset between the cells at the UE antenna connector		µs	Cell 2 to Cell 1: 0 Cell 3 to Cell 1: 3	PRS are transmitted from synchronous cells
Expected RSTD		µs	Cell 2: 3 Cell 3: 3 Other neighbour cells: randomly between -3 and 3	The expected RSTD is what is expected at the receiver. The corresponding parameter in the DL-TDOA assistance data specified in TS 37.355 [34] is the expectedRSTD indicator
Expected RSTD uncertainty for all neighbour cells		µs	5	The corresponding parameter in the DL-TDOA assistance data specified in TS 37.355 [34] is the expectedRSTD-Uncertainty index
Number of cells provided in DL-TDOA assistance data			16	Including the reference cell
PRS muting info			Cell 1: ‘10’ Cell 2: ‘01’ Cell 3: ‘10’	Correponds to prs-MutingInfo defined in TS 37.355 [24]
PRS resource RE offset			Cell 1: 0 Cell 2: 0 Cell 3: 1	Cell 1 and Cell 3 are configured with different resource offsets

T1	s	3	The length of the time interval from the beginning of each test
T2	s	[1.28]	The length of the time interval that follows immediately after time interval T1
AoA setup		Setup 1	As defined in A.3.15.1
Beam assumption		Rough	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Table A.7.6.9.3.1-3: Cell-specific test parameters for RSTD measurement reporting delay during T1

Parameter		Unit	Cell 1	Cell 2	Cell 3
NR RF Channel Number			1	1	1
Positiong frequency layer			1	1	1
Correlation Matrix and Antenna Configuration			1x2 Low	1x2 Low	1x2 Low
OCNG patterns defined in A.3.2.1			OP.5 FDD	N/A	N/A
N_{oc} Note 3	Config 1	dBm/SCS	-89		
PRS $\hat{E}_s/N_{oc}$		dB	-Infinity	-Infinity	-Infinity
Io Note 4	Config 1	dBm/ 95.04MHz	-58.86	-60.01	-60.01
SSB RP Note4	Config 1	dBm/SCS	-89	-Infinity	-Infinity
$\hat{E}_s/N_{oc}$		dB	0	-Infinity	-Infinity
Propagation Condition			AWGN		

Note 1: OCNG shall be used such that active cell (Cell 1) is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 3: Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 4: SSB RP and Io levels have been derived from other parameters and are given for information purpose. These are not settable test parameters.

Table A.7.6.9.3.1-4: Cell-specific test parameters for RSTD measurement reporting delay during T2

Parameter	Unit	Cell 1	Cell 2	Cell 3
		T2	T2	T2
RF Channel Number		1	1	1
Positiong frequency layer		1	1	1
Correlation Matrix and Antenna Configuration		1x2 Low	1x2 Low	1x2 Low

OCNG patterns defined in A.3.2.1			OP.1	OP.1	OP.1
PRACH configuration			FR2 PRACH configuration 1	FR2 PRACH configuration 1	FR2 PRACH configuration 1
N_{oc} Note 3	Config 1	dBm/SCS	-89	-89	-89
PRS $\hat{E}_s/N_{oc}$	Config 1	dB	-2	-5.44	-5.44
Io	Config 1	dBm/ 9.36MHz	-57.63	-59.65	-59.65
PRS $\hat{E}_s/I_{ot}$		dB	-3	-6	-6
Propagation Condition			AWGN		

Note 1: OCNG shall be used such that active cells (all, except Cell 3 in T3) are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols other than those in the subframes with transmitted PRS.

Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 3: Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

A.7.6.9.3.2 Test Requirements

The RSTD measurement time fulfils the requirements specified in Clause 9.9.2.5.

The UE shall perform and report the RSTD measurements for Cell 2 and Cell 3 with respect to the reference cell in the DL-TDOA assistance data, Cell 1, within the time duration X1 specified in section 9.9.1.5 starting from the beginning of time interval T2, where X1 is 2560ms.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported RSTD measurement for each correct event shall be within the RSTD reporting range specified in Clause 10.1.23.3, i.e., between RSTD_0000000 and RSTD_1970049.

A.7.6.9.4 NR RSTD measurement reporting delay test case for single positioning frequency layer in FR2 SA without measurement gap

A.7.6.9.4.1 Test Purpose and Environment

The purpose of the test is to verify that the RSTD measurement meets the gapless RSTD measurement requirements specified in Clause 9.9.2.7 in an environment with AWGN propagation conditions in FR2 in standalone scenario when single positioning frequency layer is configured. Reporting delay test for gapless PRS measurement is conducted assuming that the PRS has higher priority, i.e., state 1, than all other DL signals/channels and is transmitted within active DL BWP of UE. Two sub-tests are defined, sub-test 1 is for N_{sample} = 4 and sub-test 2 is for N_{sample} = 1. For sub-test 2 LMF indicates UE to perform PRS measurement with N_{sample} = 1.

Supported test configurations are shown in table A.7.6.9.4.1-1. The test parameters are as given in Table A.7.6.9.4.1-2, Table A.7.6.9.4.1-3, and Table A.7.6.9.4.1-4.

Table A.7.6.9.4.1-1: Supported test configurations for NR RSTD

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

In the test there are three synchronous cells: Cell 1, Cell 2 and Cell 3. Cell 1 is the reference as well as the PCell. Cell 2 and Cell 3 are the neighbour cells. All cells are on the same RF channel distributed in single positioning frequency layers.

The test consists of two consecutive time intervals, with duration of T1 and T2. During time duration T1, the UE shall not have any timing information of Cell 2 and Cell 3. All three cells transmit PRS during T2.

Note: The information on when PRS is muted is conveyed to the UE using PRS muting information.

The *NR-DL-TDOA-ProvideAssistanceData* and *nr-DL-TDOA-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where $\Delta T = 50$ ms is the maximum processing time of the *DL-TDOA assistance* data and location information request.

The beginning of the time interval T2 shall be aligned with the beginning of the first PRS processing window instance containing the PRS resources.

The UE is configured with PPW before T2.

Table A.7.6.9.4.1-2: General test parameters for RSTD measurement reporting delay

Parameter		Unit	Value	Comment
Reference cell			Cell 1	Reference cell is the cell in the DL-TDOA assistance data with respect to which the RSTD measurement is defined, as specified in TS 38.215 [4] and TS 37.355 [34]. The reference cell is the PCell in this test case.
Neighbor cells			Cell 2 and Cell 3	Cell 2 and Cell 3 appear at the first and second places in the neighbour cell list in the DL-TDOA assistance data.
$BW_{channel}$	Config 1	MHz	100: $N_{RB,c} = 66$	
SSB configuration	Config 1		SSB.2 FR2	
SMTC configuration	Config 1		SMTC.1	
PDSCH RMC configuration	Config 1		SR.1.1 FDD	
RMSI CORESET RMC configuration	Config 1		CR.3.1 TDD	As specified in clause A.3.1.2.1
Dedicated CORESET RMC configuration	Config 1		CR.1.1 FDD	
PRS Configuration	Config 1		PRS.1.4. FR2	As specified in clause A.3.31

Physical cell ID PCI		(PCI of Cell 1 – PCI of Cell 2)mod6=0 and (PCI of Cell 1 – PCI of Cell 3)mod6=0	The cell PCIs are selected such that the relative shifts of PRS patterns among cells are as given by the test parameters
CP length		Normal	
DRX		OFF	
PPW configuration		Table A.3.X-1: Reference PPW configuration	As defined in A.3.X
Time offset between serving and neighbour cells	µs	set to the UE reported capability for receive time difference threshold if the UE reported value is < 3µs 3µs otherwise	PRS are transmitted from synchronous cells
Expected RSTD	µs	0	The expected RSTD is what is expected at the receiver. The corresponding parameter in the DL-TDOA assistance data specified in TS 37.355 [34] is the expectedRSTD indicator
Expected RSTD uncertainty for all neighbour cells	µs	Same as time offset	The corresponding parameter in the DL-TDOA assistance ta specified in TS 37.355 [34] is the expectedRSTD-Uncertainty index
Number of cells provided in DL-TDOA assistance data		16	Including the reference cell
PRS muting info		Cell 1: '10' Cell 2: '01' Cell 3: '10'	Correponds to prs-MutingInfo defined in TS 37.355 [24]
PRS resource RE offset		Cell 1: 0 Cell 2: 0 Cell 3: 1	Cell 1 and Cell 3 are configured with different resource offsets
T1	s	3	The length of the time interval from the beginning of each test
T2	ms	10	The length of the time interval that follows after time interval T1 and processing time of assistance data. In this test UE is configured to measure single PFL within the configured PPW.
AoA setup		Setup 1	As defined in A.3.15.1
Beam assumption		Rough	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Table A.7.6.9.4.1-3: Cell-specific test parameters for RSTD measurement reporting delay during T1

Parameter	Unit	Cell 1	Cell 2	Cell 3
NR RF Channel Number		1	1	1
Positiong frequency layer		1	1	1
Correlation Matrix and Antenna Configuration		1x2 Low	1x2 Low	1x2 Low

OCNG patterns defined in A.3.2.1			OP.5 FDD	N/A	N/A
N_{oc} Note 3	Config 1	dBm/SCS	-89		
PRS $\hat{E}_s/N_{oc}$		dB	-Infinity	-Infinity	-Infinity
Io Note 4	Config 1	dBm/ 95.04MHz	-58.86	-60.01	-60.01
SSB RP Note4	Config 1	dBm/SCS	-89	-Infinity	-Infinity
$\hat{E}_s/N_{oc}$		dB	0	-Infinity	-Infinity
Propagation Condition			AWGN		

Note 1: OCNG shall be used such that active cell (Cell 1) is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 3: Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 4: SSB RP and Io levels have been derived from other parameters and are given for information purpose. These are not settable test parameters.

Table A.7.6.9.4.1-4: Cell-specific test parameters for RSTD measurement reporting delay during T2

Parameter		Unit	Cell 1		Cell 2		Cell 3	
			Sub-test 1	Sub-test 2	Sub-test 1	Sub-test 2	Sub-test 1	Sub-test 2
RF Channel Number			1		1		1	
Positiong frequency layer			1		1		1	
Correlation Matrix and Antenna Configuration			1x2 Low		1x2 Low		1x2 Low	
OCNG patterns defined in A.3.2.1			OP.1		OP.1		OP.1	
PRACH configuration			FR2 PRACH configuration 1		FR2 PRACH configuration 1		FR2 PRACH configuration 1	
N_{oc} Note 3	Config 1	dBm/SCS	-89		-89		-89	
PRS $\hat{E}_s/N_{oc}$	Config 1	dB	-6	-3	-13	5	-13	5
Io	Config 1	dBm/ 9.36MHz	-59.65		-59.92		-59.92	
PRS $\hat{E}_s/I_{ot}$		dB	-6	-3	-13	5	-13	5
PRS-RSRP Note 4		dBm/SCS	-95	-92	-102	-84	-102	-84
Propagation Condition			AWGN					

Note 1: OCNG shall be used such that active cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols other than those in the slots with transmitted PRS.
Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 3:	Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

A.7.6.9.4.2 Test Requirements

The RSTD measurement time fulfils the gapless RSTD measurement reporting delay requirements specified in Clause 9.9.2.7.

The UE shall perform and report the RSTD measurements for Cell 2 and Cell 3 with respect to the reference cell in the DL-TDOA assistance data, Cell 1, within the time duration specified in section 9.9.2.7 starting from the beginning of time interval T2.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported RSTD measurement for each correct event shall be within the RSTD reporting range specified in Clause 10.1.23.3, i.e., between RSTD_0000000 and RSTD_1970049.

A.7.6.9.5 NR RSTD measurement reporting delay test case for single positioning frequency layer in FR2 SA in RRC_CONNECTED state with Rx TEG

A.7.6.9.5.1 Test Purpose and Environment

The purpose of the test is to verify that the RSTD measurement meets the Rx TEG based measurement period requirements specified in Clause 9.9.2.5 in an environment with AWGN propagation conditions in FR2 in standalone scenario when single positioning frequency layer is configured.

Supported test configurations are shown in table A.7.6.9.5.1-1. The test parameters are as given in Table A7.6.9.5.1-2, Table A.7.6.9.5.1-3 and, Table A.7.6.9.5.1-4.

Table A.7.6.9.5.1-1: Supported test configurations for NR RSTD

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

In the test there are three synchronous cells: Cell 1, Cell 2 and Cell 3. Cell 1 is the reference as well as the PCell. Cell 2 and Cell 3 are the neighbour cells. All cells are on the same RF channel distributed in single positioning frequency layers.

The test consists of two consecutive time intervals, with duration of T1 and T2. During time duration T1, the UE shall not have any timing information of Cell 2 and Cell 3. All three cells transmit PRS during T2.

Note: The information on when PRS is muted is conveyed to the UE using PRS muting information.

The *NR-DL-TDOA-ProvideAssistanceData* and *nr-DL-TDOA-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where ΔT = 50 ms is the maximum processing time of the *DL-TDOA assistance* data and location information request.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance containing the PRS resources.

The UE is configured with measurement gap pattern ID # 24 or #13 before T2.

The test applies to the UE supporting Rx TEG indicated via *NR-UE-TEG-Capability* and is requested to provide the Rx TEG in the test via *nr-UE-RxTEG-Request-r17* in *NR-TDOA-RequestLocationInformation*. In the location request *measureSameDL-PRS-ResourceWithDifferentRxTEGs-r17* is set to n0. The UE shall perform and optionally report the Rx TEG based RSTD measurements.

The UE is capable of performing Rx TEG based RSTD measurements. UE may or may not be able to receive same DL PRS resource from the same TRP simultaneously from multiple Rx TEGs.

Table A.7.6.9.5.1-2: General test parameters for RSTD measurement reporting delay

Parameter		Unit	Value	Comment
Reference cell			Cell 1	Reference cell is the cell in the DL-TDOA assistance data with respect to which the RSTD measurement is defined, as specified in TS 38.215 [4] and TS 37.355 [34]. The reference cell is the PCell in this test case.
Neighbor cells			Cell 2 and Cell 3	Cell 2 and Cell 3 appear at the first and second places in the neighbour cell list in the DL-TDOA assistance data.
$BW_{channel}$	Config 1	MHz	100: $N_{RB,c}$ = 66	
SSB configuration	Config 1		SSB.2 FR2	
SMTC configuration	Config 1		SMTC.1	
PDSCH RMC configuration	Config 1		SR.1.1 FDD	
RMSI CORESET RMC configuration	Config 1		CR.3.1 TDD	As specified in clause A.3.1.2.1
Dedicated CORESET RMC configuration	Config 1		CR.1.1 FDD	
PRS Configuration	Config 1		PRS.1.4. FR2	As specified in clause A.3.31
Physical cell ID PCI			(PCI of Cell 1 – PCI of Cell 2)mod6=0 and (PCI of Cell 1 – PCI of Cell 3)mod6=0	The cell PCIs are selected such that the relative shifts of PRS patterns among cells are as given by the test parameters
CP length			Normal	
DRX			OFF	
Measurement gap			GP#24 or GP#13	GP#24 is configured if UE supports MG#24, otherwise GP#13 is configured
Radio frame receive time offset between the cells at the UE antenna connector		μs	Cell 2 to Cell 1: 0 Cell 3 to Cell 1: 3	PRS are transmitted from synchronous cells

Expected RSTD	µs	Cell 2: 3 Cell 3: 3 Other neighbour cells: randomly between -3 and 3	The expected RSTD is what is expected at the receiver. The corresponding parameter in the DL-TDOA assistance data specified in TS 37.355 [34] is the expectedRSTD indicator
Expected RSTD uncertainty for all neighbour cells	µs	5	The corresponding parameter in the DL-TDOA assistance data specified in TS 37.355 [34] is the expectedRSTD-Uncertainty index
Number of cells provided in DL-TDOA assistance data		16	Including the reference cell
PRS muting info		Cell 1: '10' Cell 2: '01' Cell 3: '10'	Correponds to prs-MutingInfo defined in TS 37.355 [24]
PRS resource RE offset		Cell 1: 0 Cell 2: 0 Cell 3: 1	Cell 1 and Cell 3 are configured with different resource offsets
T1	s	3	The length of the time interval from the beginning of each test
T2	s	[1.28*$k_{multiTEG}$] Note 1	The length of the time interval that follows immediately after time interval T1
AoA setup		Setup 1	As defined in A.3.15.1
Beam assumption		Rough	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 1: $k_{multiTEG}=\left\lceil \frac{N_{TEG}}{k_{TEG,simul}} \right\rceil$ if UE is capable of receiving the same DL PRS resource from the same TRP simultaneously from multiple Rx TEGs, where N_{TEG} is the maximum number of Rx TEGs with which UE can support to measure the same PRS resource, and $k_{TEG,simul}$ is the number of Rx TEGs UE can measure simultaneously which is reported via *measureSameDL-PRS-ResourceWithDifferentRxTEGsSimul*.			

Table A.7.6.9.5.1-3: Cell-specific test parameters for RSTD measurement reporting delay during T1

Parameter		Unit	Cell 1	Cell 2	Cell 3
NR RF Channel Number			1	1	1
Positiong frequency layer			1	1	1
Correlation Matrix and Antenna Configuration			1x2 Low	1x2 Low	1x2 Low
OCNG patterns defined in A.3.2.1			OP.5 FDD	N/A	N/A
N_{oc} Note 3	Config 1	dBm/SCS	-89		
PRS $\hat{E}_s/N_{oc}$		dB	-Infinity	-Infinity	-Infinity
Io Note 4	Config 1	dBm/ 95.04MHz	-58.86	-60.01	-60.01
SSB RP Note4	Config 1	dBm/SCS	-89	-Infinity	-Infinity

$\hat{E}_s/N_{oc}$		dB	0	-Infinity	-Infinity
Propagation Condition			AWGN		

Note 1: OCNG shall be used such that active cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 3: Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 4: SSB RP and Io levels have been derived from other parameters and are given for information purpose. These are not settable test parameters.

Table A.7.6.9.5.1-4: Cell-specific test parameters for RSTD measurement reporting delay during T2

Parameter		Unit	Cell 1	Cell 2	Cell 3
			T2	T2	T2
RF Channel Number			1	1	1
Positiong frequency layer			1	1	1
Correlation Matrix and Antenna Configuration			1x2 Low	1x2 Low	1x2 Low
OCNG patterns defined in A.3.2.1			OP.1	OP.1	OP.1
PRACH configuration			FR2 PRACH configuration 1	FR2 PRACH configuration 1	FR2 PRACH configuration 1
N_{oc} Note 3	Config 1	dBm/SCS	-89	-89	-89
PRS $\hat{E}_s/N_{oc}$	Config 1	dB	-5.44	-11.67	-11.67
Io	Config 1	dBm/ 9.36MHz	-59.65	-59.92	-59.92
PRS $\hat{E}_s/I_{ot}$		dB	-6	-13	-13
Propagation Condition			AWGN		

Note 1: OCNG shall be used such that active cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols other than those in the subframes with transmitted PRS.
Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 3: Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

A.7.6.9.5.2 Test Requirements

The RSTD measurement time fulfils the Rx TEG based RSTD measurement period requirements specified in Clause 9.9.2.5. The UE shall perform and report the Rx TEG based RSTD measurements for Cell 2 and Cell 3 with respect to the reference cell in the DL-TDOA assistance data, Cell 1, within the time duration specified in section 9.9.2.5 starting from the beginning of time interval T2.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported RSTD measurement for each correct event shall be within the RSTD reporting range specified in Clause 10.1.23.3, i.e., between RSTD_0000000 and RSTD1970049.

A.7.6.10 PRS-RSRP measurements

A.7.6.10.1 PRS-RSRP reporting delay test case for single positioning frequency layer

A.7.6.10.1.1 Test Purpose and Environment

The purpose of the test is to verify the PRS RSRP measurement requirements specified in Clause 9.9.3.5 for single positioning frequency layer under AWGN propagation conditions in standalone scenario. Supported test configurations are shown in table A.7.6.10.1.1-1

There are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the PCell.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2. Both cells transmit PRS during T2.

The *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message as defined in TS 37.355 shall be provided to the UE during T1. The last slot containing the two messages for the assistance data and location information request is denoted as #n.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance containing the PRS resources that is ΔT after slot #n, where ΔT = 50 ms is the maximum processing time of the assistance data and location information request.

The test parameters are as given in table A.7.6.10.1.1-2, and table A.7.6.10.1.1-3.

Table A.7.6.10.1.1-1: supported test configurations for PRS RSRP measurement for FR2-FR2

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.6.10.1.1-2: General test parameters for PRS RSRP measurement reporting delay

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
Active cell		Config 1	NR cell 1 (Pcell)	Cell 1 is the PCell and the DL-AoD reference cell in the positioning assistance data.
Neighbour cell		Config 1	NR cell 2	Cell 2 is a neighbour cell in the positioning assistance data.
Gap Pattern Id		Config 1	GP#13 or GP#24[Note1]	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	39	
SMTC parameters		Config 1	SMTC.1	As specified in clause A.3.11
SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
A3-Offset	dB	Config 1	-6	

Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX		Config 1	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3μs	Synchronous cells.
Expected RSTD	μs	Config 1	3	
Expected RSTD uncertainty	μs	Config 1	5	
T1	s	Config 1	5	
T2	s	Config 1	7	
Note 1: GP#24 is configured if UE supports MG#24, otherwise GP#13 is configured.				

Table A.7.6.10.1.1-3: Cell-specific test parameters for PRS RSRP measurement reporting delay

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1	Setup 1 as specified in clause A.3.15			
Beam Assumption[Note 7]			Config 1	Rough		Rough	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
Duplex mode			Config 1	TDD		TDD	
$BW_{channel}$		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP BW		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
Dedicated CORESET RMC configuration			Config 1	CCR.3.1 TDD		-	
TRS configuration			Config 1	TRS.2.1 TDD		-	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120	
PRS configuration			Config 1	PRS.1.1 FR2		PRS.1.1 FR2	
PRS muting configuration			Config 1	‘10’		‘01’	
EPRE ratio of PSS to SSS			Config 1	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							

EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15 kHz Note5		-102		-102	
N_{oc} Note2	dBm/SCS Note4	Config 1	-93		-93	
SSB_RP Note 3	dBm/SCS Note5	Config 1	-96	-96	-Infinity	-103
PRP Note 3	dBm/SCS Note5	Config 1	-Infinity	-96	-Infinity	-103
PRS $\hat{E}_s/I_{ot}$	dB	Config 1	-Infinity	-3.41	-Infinity	-11.76
PRS $\hat{E}_s/N_{oc}$	dB	Config 1	-Infinity	-3	-Infinity	-10
SSB $\hat{E}_s/N_{oc}$	dB	Config 1	-3	-3	-Infinity	-10
Io Note3	dBm/95.04 MHz Note5	Config 1	-62.25	-61.97	-62.25	-61.97
Propagation Condition		Config 1	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SSB_RP/PRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone

Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone

Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.6.10.1.2 Test Requirements

The PRS RSRP measurement time fulfils the requirements specified in Clause 9.9.3.5.The UE shall perform and report the PRS RSRP measurements for Cell 2 with respect to the reference cell in the DL-AoD assistance data, Cell 1, within the time duration specified in section 9.9.3.5 starting from the beginning of time interval T2.

The rate of the correct events for the neighbour cell observed during repeated tests shall be at least 90%, where the reported PRS RSRP measurement for each correct event shall be within the PRS RSRP reporting range specified in Clause 10.1.24.3, i.e., between PRS RSRP_0 and PRS RSRP_126.

A.7.6.10.2 PRS-RSRP reporting delay test case for dual positioning frequency layer

A.7.6.10.2.1 Test Purpose and Environment

The purpose of the test is to verify the PRS RSRP measurement requirements specified in Clause 9.9.3.5 for dual positioning frequency layers under AWGN propagation conditions in standalone scenario. Supported test configurations are shown in table A.7.6.10.2.1-1

There are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the different frequency from the PCell.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2. Both cells transmit PRS during T2.

The *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message as defined in TS 37.355 shall be provided to the UE during T1. The last slot containing the two messages for the assistance data and location information request is denoted as #n.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance containing the PRS resources that is ΔT after slot #n, where ΔT = 50 ms is the maximum processing time of the assistance data and location information request.

The test parameters are as given in table A.7.6.10.2.1-2, and table A.7.6.10.2.1-3.

Table A.7.6.10.2.1-1: supported test configurations for PRS RSRP measurement for FR2-FR2

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.6.10.2.1-2: General test parameters for PRS RSRP measurement reporting delay

Parameter	Unit	Test configuration	Value	Comment
Active cell		Config 1	NR cell 1 (Pcell)	Cell 1 is the PCell and the DL-AoD reference cell in the positioning assistance data.
Neighbour cell		Config 1	NR cell 2	Cell 2 is a neighbour cell in the positioning assistance data.
Gap Pattern Id		Config 1	GP#13 or GP#24[Note1]	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	39	
SMTC parameters		Config 1	SMTC.1	As specified in clause A.3.11
SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
A3-Offset	dB	Config 1	-6	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX		Config 1	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3μs	Synchronous cells.

Expected RSTD	µs	Config 1	3	
Expected RSTD uncertainty	µs	Config 1	5	
T1	s	Config 1	5	
T2	s	Config 1	7	
Note 1: GP#24 is configured if UE supports MG#24, otherwise GP#13 is configured.				

Table A.7.6.10.2.1-3: Cell-specific test parameters for PRS RSRP measurement reporting delay

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1	Setup 1 as specified in clause A.3.15			
Beam Assumption[Note 7]			Config 1	Rough		Rough	
NR RF Channel Number			Config 1	1		2	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
Duplex mode			Config 1	TDD		TDD	
$BW_{channel}$		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP BW		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
Dedicated CORESET RMC configuration			Config 1	CCR.3.1 TDD		-	
TRS configuration			Config 1	TRS.2.1 TDD		-	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120	
PRS configuration			Config 1	PRS.1.1 FR2		PRS.1.2 FR2	
PRS muting configuration			Config 1	‘10’		‘01’	
EPRE ratio of PSS to SSS			Config 1	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		dBm/15 kHz Note5		-104.7		-104.7	

N_{oc} Note2	dBm/SCS Note4	Config 1	-95.7		-95.7	
SSB_RP Note 3	dBm/SCS Note5	Config 1	-98.7	-98.7	-Infinity	-105.7
PRP Note 3	dBm/SCS Note5	Config 1	-Infinity	-98.7	-Infinity	-105.7
PRS $\hat{E}_s/I_{ot}$	dB	Config 1	-Infinity	-3	-Infinity	-10
PRS $\hat{E}_s/N_{oc}$	dB	Config 1	-Infinity	-3	-Infinity	-10
SSB $\hat{E}_s/N_{oc}$	dB	Config 1	-3	-3	-Infinity	-10
Io Note3	dBm/95.04 MHz Note5	Config 1	-64.95	-64.95	-66.71	-66.30
Propagation Condition		Config 1	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SSB_RP/PRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.6.10.2.2 Test Requirements

The PRS RSRP measurement time fulfils the requirements specified in Clause 9.9.3.5.The UE shall perform and report the PRS RSRP measurements for Cell 2 with respect to the reference cell in the DL-AoD assistance data, Cell 1, within the time duration specified in section 9.9.3.5 starting from the beginning of time interval T2.

The rate of the correct events for the neighbour cell observed during repeated tests shall be at least 90%, where the reported PRS RSRP measurement for each correct event shall be within the PRS RSRP reporting range specified in Clause 10.1.24.3, i.e., between PRS RSRP_0 and PRS RSRP_126.

A.7.6.10.3 PRS-RSRP reporting delay test case for reduced number of samples

A.7.6.10.3.1 Test Purpose and Environment

The purpose of the test is to verify the PRS RSRP measurement requirements for reduced number of samples specified in Clause 9.9.3.5 for single positioning frequency layer under AWGN propagation conditions in standalone scenario. Supported test configurations are shown in table A.7.6.10.X1.1-1. In this test PRS is transmitted within the active BWP of the UE.

There are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the PCell.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2. Both cells transmit PRS during T2.

The *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message as defined in TS 37.355 shall be provided to the UE during T1. The last slot containing the two messages for the assistance data and location information request is denoted as #n. UE can support *supportedDL-PRS-ProcessingSamples-RRC-CONNECTED*, and the LMF indicates the UE to perform positioning measurements with reduced number of samples N_{sample} via *reducedDL-PRS-ProcessingSamples*.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance containing the PRS resources that is ΔT after slot #n, where ΔT = 50 ms is the maximum processing time of the assistance data and location information request.

The test parameters are as given in table A.7.6.10.3.1-2, and table A.7.6.10.3.1-3.

Table A.7.6.10.3.1-1: supported test configurations for PRS RSRP measurement for FR2-FR2

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.6.10.3.1-2: General test parameters for PRS RSRP measurement reporting delay

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
Active cell		Config 1	NR cell 1 (Pcell)	Cell 1 is the PCell and the DL-AoD reference cell in the positioning assistance data.
Neighbour cell		Config 1	NR cell 2	Cell 2 is a neighbour cell in the positioning assistance data.
Gap Pattern Id		Config 1	GP#13 or GP#24[Note1]	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	39	
SMTC parameters		Config 1	SMTC.1	As specified in clause A.3.11
SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
A3-Offset	dB	Config 1	-6	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX		Config 1	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3μs	Synchronous cells.
Expected RSTD	μs	Config 1	3	
Expected RSTD uncertainty	μs	Config 1	5	
T1	s	Config 1	5	
T2	s	Config 1	7	

Note 1: GP#24 is configured if UE supports MG#24, otherwise GP#13 is configured.

Table A.7.6.10.3.1-3: Cell-specific test parameters for PRS RSRP measurement reporting delay

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1	Setup 1 as specified in clause A.3.15			
Beam Assumption[Note 7]			Config 1	Rough		Rough	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
Duplex mode			Config 1	TDD		TDD	
$BW_{channel}$		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP BW		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
Dedicated CORESET RMC configuration			Config 1	CCR.3.1 TDD		-	
TRS configuration			Config 1	TRS.2.1 TDD		-	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120	
PRS configuration			Config 1	PRS.1.1 FR2		PRS.1.1 FR2	
PRS BW			Config 1	48 PRBs		48 PRBs	
PRS muting configuration			Config 1	‘10’		‘01’	
EPRE ratio of PSS to SSS		dB	Config 1	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
EPRE ratio of PRS to SSS							
N_{oc} Note2		dBm/15 kHz Note5		-102		-102	
N_{oc} Note2		dBm/SCS Note4	Config 1	-93		-93	

PRS-RSRP Note 3	dBm/SCS Note5	Config 1	-Infinity	-93	-Infinity	-96
PRS $\hat{E}_s/I_{ot}$	dB	Config 1	-Infinity	-1.76	-Infinity	-6.01
PRS $\hat{E}_s/N_{oc}$	dB	Config 1	-Infinity	0	-Infinity	-3
Io Note3	dBm/95.04 MHz Note5	Config 1	-60.03		-60.03	
Propagation Condition		Config 1	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: PRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: PRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.6.10.3.2 Test Requirements

The PRS RSRP measurement time fulfils the requirements specified in Clause 9.9.3.5. The UE shall perform and report the PRS RSRP measurements for Cell 2 with respect to the reference cell in the DL-AoD assistance data, Cell 1, within the time duration specified in section 9.9.3.5 starting from the beginning of time interval T2.

The rate of the correct events for the neighbour cell observed during repeated tests shall be at least 90%, where the reported PRS RSRP measurement for each correct event shall be within the PRS RSRP reporting range specified in Clause 10.1.24.3, i.e., between PRS RSRP_0 and PRS RSRP_126.

A.7.6.10.4 PRS-RSRP reporting delay test case for single positioning frequency layer outside MG

A.7.6.10.4.1 Test Purpose and Environment

The purpose of the test is to verify the PRS RSRP measurement outside MG requirements specified in Clause 9.9.3.6 for single positioning frequency layer under AWGN propagation conditions in standalone scenario. There are two sub-tests in the test, sub-test 1 is to verify the delay requirements with Nsample=1, and sub-test 2 is to verify the delay requirements with Nsample=4.

Supported test configurations are shown in table A.7.6.10.4.1-1

There are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the PCell.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2. Both cells transmit PRS during T2.

The *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message as defined in TS 37.355 shall be provided to the UE during T1. The last slot containing the two messages for the assistance data and location information request is denoted as #n. In sub-test 1, *requestedDL-PRS-ProcessingSamples* shall be included in the location information request and set to ‘m1’, and *lowerRxBeamSweepingThan8-FR2* shall be included.

During T1, a PPW shall be configured for the PCell and be activated via DL MAC CE. The last PDSCH containing the MAC CE shall be transmitted before slot #n.

The beginning of the time interval T2 shall be aligned with the beginning of the first PPW instance containing the PRS resources that is ΔT after slot #n, where ΔT = 50 ms is the maximum processing time of the assistance data and location information request.

The general test parameters are as given in table A.7.6.10.4.1-2, and cell specific test parameters during T2 are listed in table A.7.6.10.4.1-3.

Table A.7.6.10.4.1-1: supported test configurations for PRS RSRP measurement for FR2

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.6.10.4.1-2: General test parameters for PRS RSRP measurement reporting delay

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
Active cell		Config 1	NR cell 1 (Pcell)	Cell 1 is the PCell and the DL-AoD reference cell in the positioning assistance data.
Neighbour cell		Config 1	NR cell 2	Cell 2 is a neighbour cell in the positioning assistance data.
PPW configuration		Config 1	TBD	
SMTC parameters		Config 1	SMTC.1	As specified in clause A.3.11
SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
CP length		Config 1	Normal	
DRX		Config 1	OFF	DRX is not used
Time offset between serving and neighbour cells	µs	Config 1	0.58, 2.0 or 3 Note 1	
Expected RSTD	µs	Config 1	0	
Expected RSTD uncertainty	µs	Config 1	Same as time offset between serving and neighbour cells	
T1	s	Config 1	5	
T2	s	Config 1	7	
NOTE 1: If UE indicates support of CP length for the receive time difference threshold, the time offset is set to 0.58us; If UE indicates support of 1/4 symbol length for the receive time difference threshold, the time offset is set to 2.0us, otherwise 3us.				

Table A.7.6.10.4.1-3: Cell-specific test parameters during T2 for PRS RSRP measurement reporting delay

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			Sub-test 1	Sub-test 2	Sub-test 1	Sub-test 2
AoA setup		Config 1	Setup 1 as specified in clause A.3.15			

Beam Assumption[Note 7]			Config 1	Rough		Rough	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
Duplex mode			Config 1	TDD		TDD	
$BW_{channel}$		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP BW		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
Dedicated CORESET RMC configuration			Config 1	CCR.3.1 TDD		-	
TRS configuration			Config 1	TRS.2.1 TDD		-	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120	
PRS configuration			Config 1	PRS.1.1 FR2		PRS.1.1 FR2	
PRS muting configuration			Config 1	'10'		'01'	
EPRE ratio of PSS to SSS			Config 1	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} [Note2]		dBm/15 kHz Note5		-102		-102	
N_{oc} [Note2]		dBm/SCS Note4	Config 1	-93		-93	
SS-RSRP [Note 3]		dBm/SCS Note5	Config 1	-96	-96	-99	-103
PRS-RSRP [Note 3]		dBm/SCS Note5	Config 1	-96	-96	-99	-103
PRS $\hat{E}_s / I_{ot}$		dB	Config 1	-3	-3	-6	-10
PRS $\hat{E}_s / N_{oc}$		dB	Config 1	-3	-3	-6	-10

Io[Note3]	dBm/95.04 MHz Note5	Config 1	-62.25	-62.25	-63.04	-63.60
Propagation Condition		Config 1	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP/PRS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.6.10.4.2 Test Requirements

The PRS RSRP measurement time fulfils the requirements specified in Clause 9.9.3.6, with Nsample=1 for sub-test 1 and Nsample=4 for sub-test 2. The UE shall perform and report the PRS RSRP measurements for Cell 2 with respect to the reference cell in the DL-AoD assistance data, Cell 1, within the time duration specified in section 9.9.3.6 starting from the beginning of time interval T2.

The rate of the correct events for the neighbour cell observed during repeated tests shall be at least 90%, where the reported PRS RSRP measurement for each correct event shall be within the PRS RSRP reporting range specified in Clause 10.1.24.3, i.e., between PRS RSRP_0 and PRS RSRP_126.

A.7.6.11 UE Rx-Tx time difference measurements

A.7.6.11.1 UE Rx-Tx time difference measurements for single positioning frequency layer in FR2 SA

A.7.6.11.1.1 Test purpose and environment

The purpose of the test is to verify that the UE Rx-Tx measurement meets the requirements specified in clause 9.9.4.5 in AWGN propagation condition in FR2 in standalone scenario when single positioning frequency layer is configured.

The supported test configurations in listed in Table A.7.6.11.1.1-1.

Table A.7.6.11.1.1-1: Supported test configurations

Config	Description
1	120 kHz SSB and PRS SCS, 100 MHz bandwidth, TDD duplex mode

There are two cells in the test: PCell (Cell 1) and a neighbour cell (Cell 2). Both cells are on the same RF channel in FR2.

The test consists of two consecutive time intervals, with duration of T1 and T2. Cell 1 and Cell 2 mute PRS transmission during T1 and transmit PRS during T2.

The *NR-Multi-RTT-ProvideAssistanceData* and *nr-Multi-RTT-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where ΔT = 50 ms is the maximum processing time of the multi-RTT assistance data and location information request.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance containing the PRS resources.

The UE is configured with measurement gap pattern ID #13 or ID #24 before T2.

The UE is configured to transmit positioning SRS during T2.

The general test parameters and cell specific test parameters are as given in Table A.7.6.11.1.1-2 and Table A.7.6.11.1.1-3 respectively.

T Table A.7.6.11.1.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Active cell		1	Cell 1	Cell 1 is the PCell in NR-Multi-RTT-ProvideAssistanceData [34].
Neighbour cell		1	Cell 2	Cell 2 is a neighbour cell in NR-Multi-RTT-ProvideAssistanceData [34].
RF Channel Number		1	1	For both Cell 1 and Cell 2
$BW_{channel}$	MHz	1	100: $N_{RB,c}$ = 66	
SSB configuration		1	SSB.2 FR2	
SMTC configuration		1	SMTC.1	
Measurement gap		1	GP#24 or GP#13 Note 1	
CP length		1	Normal	
DRX		1	OFF	
Time offset between serving and neighbour cells	μs	1	3	Synchronous cells
Expected RSTD	μs	1	3	
Expected RSTD uncertainty	μs	1	5	
T1	s	1	5	
T2	s	1	20	
NOTE 1: GP#24 is configured if UE supports MG#24, otherwise GP#13 is configured.				

T Table A.7.6.11.1.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1	Setup 1 as specified in clause A.3.15			
Beam Assumption Note 7		1	Rough		Rough	
TDD configuration		1	TDDConf.3.1		TDDConf.3.1	
PDSCH RMC configuration		1	SR.3.1 TDD		N/A	
RMSI CORESET RMC configuration		1	CR.3.1 TDD		N/A	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD		N/A	

OCNG Patterns		1	OP.1		OP.1	
EPRE ratio of PSS to SSS	dB	1	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS Note 1						
EPRE ratio of OCNG to OCNG DMRS Note 1						
EPRE ratio of PRS to SSS						
TRS Configuration		1	TRS.2.1 TDD		N/A	
Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1		N/A	
Active DL BWP configuration		1	DLBWP.1.1		N/A	
Active UL BWP configuration		1	ULBWP.1.1		N/A	
PRS configuration		1	PRS.1.1 FR2		PRS.1.1 FR2	
PRS muting info		1	‘10’		‘01’	
SRS configuration		1	POS-SRS.3		N/A	
N_{oc} Note 2	dBm/SCS	1	-89			
N_{oc} Note 2	dBm/15 kHz	1	-98			
PRS $\hat{E}_s / I_{ot}$	dB	1	-Infinity	-2.41	-Infinity	-12.12
PRS $\hat{E}_s / N_{oc}$	dB	1	-Infinity	-2	-Infinity	-10
PRP Note 3	dBm/SCS kHz	1	-Infinity	-91	-Infinity	-99
Io	dBm/95.04 MHz	1	N/A	-57.63	N/A	-57.63
Propagation Condition		1	AWGN			

Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	PRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6:	As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Table Table A.7.6.11.1.1-4: Void

A.7.6.11.1.2 Test requirements

The UE Rx-Tx time difference measurement time fulfils the requirements specified in clause 9.9.4.5.

The UE shall perform and report the UE Rx-Tx time difference measurements for Cell 1 and Cell 2 within the specified UE Rx-Tx time difference measurement time starting from the beginning of time interval T2.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported UE Rx-Tx measurement for each correct event shall be within the UE Rx-Tx reporting range specified in clause 10.1.25.3.1.

A.7.6.11.2 UE Rx-Tx time difference measurement period for dual positioning frequency layers in FR2 SA

A.7.6.11.2.1 Test purpose and environment

The purpose of the test is to verify that the UE Rx-Tx measurement meets the requirements specified in clause 9.9.4.5 in AWGN propagation condition in FR2 in standalone scenario when dual positioning frequency layers are cnfigured.

The supported test configurations in listed in Table A.7.6.11.2.1-1.

Table A.7.6.11.2.1-1: Supported test configurations

Config	Description
1	120 kHz SSB and PRS SCS, 100 MHz bandwidth, TDD duplex mode

There are two cells in the test: PCell (Cell 1) and a neighbour cell (Cell 2). All cells are on different RF channels in FR2.

transmission during T1 and transmit PRS during T2.

The *NR-Multi-RTT-ProvideAssistanceData* and *nr-Multi-RTT-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where ΔT = 50 ms is the maximum processing time of the multi-RTT assistance data and location information request.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance containing the PRS resources.

The UE is configured with measurement gap pattern ID #13 or ID #24 before T2.

The UE is configured to transmit positioning SRS during T2.

The general test parameters and cell specific test parameters are as given in Table A.7.6.11.2.1-2 and Table A.7.6.11.2.1-3 respectively.

Table A.7.6.11.2.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Active cell		1	Cell 1	Cell 1 is the PCell in NR-Multi-RTT-ProvideAssistanceData [34].
Neighbour cell		1	Cell 2	Cell 2 is a neighbour cell in NR-Multi-RTT-ProvideAssistanceData [34].
RF Channel Number		1	1	For Cell 1
RF Channel Number		1	2	For Cell 2
$BW_{channel}$	MHz	1	100: $N_{RB,c}$ = 66	
SSB configuration		1	SSB.2 FR2	
SMTC configuration		1	SMTC.1	
Measurement gap		1	GP#24 or GP#13 Note 1	
CP length		1	Normal	
DRX		1	OFF	
Time offset between serving and neighbour cells	µs	1	3	Synchronous cells
Expected RSTD	µs	1	3	
Expected RSTD uncertainty	µs	1	5	
T1	s	1	5	
T2	s	1	20	
Note 1: GP#24 is configured if UE supports MG#24, otherwise GP#13 is configured.				

Table A.7.6.11.2.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1	Setup 1 as specified in clause A.3.15			
Beam Assumption Note 7		1	Rough		Rough	
TDD configuration		1	TDDConf.3.1		TDDConf.3.1	
PDSCH RMC configuration		1	SR.3.1 TDD		N/A	
RMSI CORESET RMC configuration		1	CR.3.1 TDD		N/A	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD		N/A	
OCNG Patterns		1	OP.1		OP.1	
EPRE ratio of PSS to SSS	dB	1	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						

EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS Note 1						
EPRE ratio of OCNG to OCNG DMRS Note 1						
EPRE ratio of PRS to SSS						
TRS Configuration		1	TRS.2.1 TDD		N/A	
Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1		N/A	
Active DL BWP configuration		1	DLBWP.1.1		N/A	
Active UL BWP configuration		1	ULBWP.1.1		N/A	
PRS configuration		1	PRS.1.1 FR2		PRS.1.1 FR2	
PRS muting info		1	'10'		'01'	
SRS configuration		1	POS-SRS.3		N/A	
N_{oc} Note 2	dBm/SCS	1	-89			
N_{oc} Note 2	dBm/15 kHz	1	-98			
PRS $\hat{E}_s / I_{ot}$	dB	1	-Infinity	-2.41	-Infinity	-12.12
PRS $\hat{E}_s / N_{oc}$	dB	1	-Infinity	-2	-Infinity	-10
PRP Note 3	dBm/SCS kHz	1	-Infinity	-91	-Infinity	-99
Io	dBm/95.04 MHz	1	N/A	-57.89	N/A	-59.60
Propagation Condition		1	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: PRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone

Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone

Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Table Table A.7.6.11.1.1-4: Void

A.7.6.11.2.2 Test requirements

The UE Rx-Tx time difference measurement time fulfils the requirements specified in clause 9.9.4.5.

The UE shall perform and report the UE Rx-Tx time difference measurements for Cell 1 and Cell 2 within the specified UE Rx-Tx time difference measurement time starting from the beginning of time interval T2.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported UE Rx-Tx measurement for each correct event shall be within the UE Rx-Tx reporting range specified in clause 10.1.25.3.1.

A.7.6.11.3 UE Rx-Tx time difference measurements for single positioning frequency layer in FR2 SA with reduced sample number

A.7.6.11.3.1 Test purpose and environment

The purpose of the test is to verify that the UE Rx-Tx measurement meets the requirements specified in clause 9.9.4.5 with Nsample = 1 in AWGN propagation condition in FR2 in standalone scenario when single positioning frequency layer is configured. In this test PRS is transmitted within the active BWP of the UE. UE can support *supportedDL-PRS-ProcessingSamples-RRC-CONNECTED*, and the LMF indicates the UE to perform positioning measurements with reduced number of samples N_{sample} via *reducedDL-PRS-ProcessingSamples*.

The supported test configurations in listed in Table A.7.6.11.3.1-1.

Table A.7.6.11.3.1-1: Supported test configurations

Config	Description
1	120 kHz SSB and PRS SCS, 100 MHz bandwidth, TDD duplex mode

There are two cells in the test: PCell (Cell 1) and a neighbour cell (Cell 2). All cells are on the same RF channel in FR2.

The test consists of two consecutive time intervals, with duration of T1 and T2. Cell 1 and Cell 2 mute PRS transmission during T1 and transmit PRS during T2.

The *NR-Multi-RTT-ProvideAssistanceData* and *nr-Multi-RTT-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. *requestedDL-PRS-ProcessingSamples* and shall be included in the location information request and set to ‘m1’, and *lowerRxBeamSweepingThan8-FR2* shall be included. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where ΔT = 50 ms is the maximum processing time of the multi-RTT assistance data and location information request.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance containing the PRS resources.

The UE is configured with measurement gap pattern ID #13 or ID #24 before T2.

The UE is configured to transmit SRS during T2.

The general test parameters and cell specific test parameters are as given in Table A.7.6.11.3.1-2 and Table A.7.6.11.3.1-3 respectively.

Table A.7.6.11.3.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Active cell		1	Cell 1	Cell 1 is the PCell in NR-Multi-RTT-ProvideAssistanceData [34].
Neighbour cell		1	Cell 2	Cell 2 is a neighbour cell in NR-Multi-RTT-ProvideAssistanceData [34].
RF Channel Number		1	1	For both Cell 1 and Cell 2
$BW_{channel}$	MHz	1	100: $N_{RB,c}$ = 66	
SSB configuration		1	SSB.2 FR2	
SMTC configuration		1	SMTC.1	

Measurement gap		1	GP#24 or GP#13 Note 1	
CP length		1	Normal	
DRX		1	OFF	
Time offset between serving and neighbour cells	μs	1	3	Synchronous cells
T1	s	1	5	
T2	s	1	20	
NOTE 1: GP#24 is configured if UE supports MG#24, otherwise GP#13 is configured.				

Table A.7.6.11.3.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1	Setup 1 as specified in clause A.3.15			
Beam Assumption Note 7		1	Rough		Rough	
TDD configuration		1	TDDConf.3.1		TDDConf.3.1	
PDSCH RMC configuration		1	SR.3.1 TDD		N/A	
RMSI CORESET RMC configuration		1	CR.3.1 TDD		N/A	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD		N/A	
OCNG Patterns		1	OP.1		OP.1	
TRS Configuration		1	TRS.2.1 TDD		N/A	
Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1		N/A	
Active DL BWP configuration		1	DLBWP.1.1		N/A	
Active UL BWP configuration		1	ULBWP.1.1		N/A	
PRS configuration		1	PRS.1.1 FR2		PRS.1.1 FR2	
PRS muting info		1	'10'		'01'	
SRS configuration		1	POS-SRS.3		N/A	
N_{oc} Note 2	dBm/SCS	1	-89			
N_{oc} Note 2	dBm/15 kHz	1	-98			
PRS $\hat{E}_s/I_{ot}$	dB	1	-Infinity	-2	-Infinity	-6
PRS $\hat{E}_s/N_{oc}$	dB	1	-Infinity	-2	-Infinity	-6
PRS-RSRP Note 3	dBm/SCS kHz	1	-Infinity	-91	-Infinity	-95
PRS-RSRP Note 3	dBm/SCS kHz	1	-91	-91	-95	-95
Io	dBm/95.04 MHz	1	N/A	-57.88	N/A	-59.04
Propagation Condition		1	AWGN			

Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP, PRS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6:	As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.6.11.3.2 Test requirements

The UE Rx-Tx time difference measurement time fulfils the requirements specified in clause 9.9.4.5 with Nsample=1.

The UE shall perform and report the UE Rx-Tx time difference measurements for Cell 1 and Cell 2 within the specified UE Rx-Tx time difference measurement time starting from the beginning of time interval T2.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported UE Rx-Tx measurement for each correct event shall be within the UE Rx-Tx reporting range specified in clause 10.1.25.3.1.

A.7.6.11.4 UE Rx-Tx time difference measurements without gaps in FR2 SA

A.7.6.11.4.1 Test purpose and environment

The purpose of the test is to verify that the UE Rx-Tx measurement meets the requirements specified in clause 9.9.4.6 in AWGN propagation condition in FR2 in standalone scenario. There are two sub-tests in the test, sub-test 1 is to verify the delay requirements with Nsample=1, and sub-test 2 is to verify the delay requirements with Nsample=4.

The supported test configurations in listed in Table A.7.6.11.4.1-1.

Table A.7.6.11.4.1-1: Supported test configurations

Config	Description
1	120 kHz SSB and PRS SCS, 100 MHz bandwidth, TDD duplex mode

There are two cells in the test: PCell (Cell 1) and a neighbour cell (Cell 2). All cells are on the same RF channel in FR2.

The test consists of two consecutive time intervals, with duration of T1 and T2. Cell 1 and Cell 2 mute PRS transmission during T1 and transmit PRS during T2.

The *NR-Multi-RTT-ProvideAssistanceData* and *nr-Multi-RTT-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where ΔT = 50 ms is the maximum processing time of the multi-RTT assistance data and location information request.

The beginning of the time interval T2 shall be aligned with the beginning of PRS processing window containing the PRS resources.

The UE is configured with PRS processing window before T2.

The UE is configured to transmit SRS during T2.

The general test parameters and cell specific test parameters are as given in Table A.7.6.11.4.1-2 and Table A.7.6.11.4.1-3 respectively.

Table A.7.6.11.4.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Active cell		1	Cell 1	Cell 1 is the PCell in NR-Multi-RTT-ProvideAssistanceData [34].
Neighbour cell		1	Cell 2	Cell 2 is a neighbour cell in NR-Multi-RTT-ProvideAssistanceData [34].
RF Channel Number		1	1	For both Cell 1 and Cell 2
$BW_{channel}$	MHz	1	100: $N_{RB,c}$ = 66	
SSB configuration		1	SSB.2 FR2	
SMTC configuration		1	SMTC.1	
PRS processing window		TBD	TBD	
CP length		1	Normal	
DRX		1	OFF	
Time offset between serving and neighbour cells	µs	1	0.58, 2.25 or 3 Note 1	
Expected RSTD	µs	1	0	
Expected RSTD uncertainty	µs	1	Same as time offset between serving and neighbour cells	
T1	s	1	5	
T2	s	1	20	
NOTE 1: The value is up to the UE capability. The possible UE capability value: (1/4 symbol, 1/2 symbol, CP length, half of slot). When the UE reported value is > 3us, the time offset between serving and neighbour cells is set to 3us; when the UE reported value is < 3us, the time offset between serving and neighbour cells is set to the UE reported value.				

Table A.7.6.11.4.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			Sub-test 1	Sub-test 2	Sub-tets 1	Sub-test 2
AoA setup		1	Setup 1 as specified in clause A.3.15			
Beam Assumption Note 7		1	Rough		Rough	
TDD configuration		1	TDDConf.3.1		TDDConf.3.1	
PDSCH RMC configuration		1	SR.3.1 TDD		N/A	
RMSI CORESET RMC configuration		1	CR.3.1 TDD		N/A	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD		N/A	
OCNG Patterns		1	OP.1		OP.1	
TRS Configuration		1	TRS.2.1 TDD		N/A	
Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1		N/A	
Active DL BWP configuration		1	DLBWP.1.1		N/A	
Active UL BWP configuration		1	ULBWP.1.1		N/A	
PRS configuration		1	PRS.1.1 FR2		PRS.1.1 FR2	
PRS BW		1	48 PRBs	24 PRBs	48 PRBs	24 PRBs

PRS muting info		1	'10'		'01'	
SRS configuration		1	POS-SRS.3		N/A	
N_{oc} Note 2	dBm/SCS	1	-89			
N_{oc} Note 2	dBm/15 kHz	1	-98			
PRS $\hat{E}_s/I_{ot}$	dB	1	-3	-2.41	-6	-12.12
PRS $\hat{E}_s/N_{oc}$	dB	1	-1.44	-2	-3.65	-10
PRS-RSRP Note 3	dBm/SCS kHz	1	-90.44	-91	-92.65	-99
Io	dBm/95.04 MHz	1	-56.65	-57.63	-56.65	-57.63
Propagation Condition		1	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: PRS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.6.11.4.2 Test requirements

The UE Rx-Tx time difference measurement time fulfils the requirements specified in clause 9.9.4.6.

The UE shall perform and report the UE Rx-Tx time difference measurements for Cell 1 and Cell 2 within the specified UE Rx-Tx time difference measurement time starting from the beginning of time interval T2.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported UE Rx-Tx measurement for each correct event shall be within the UE Rx-Tx reporting range specified in clause 10.1.25.3.1.

A.7.6.11.5 UE Rx-Tx time difference measurements for single positioning frequency layer in FR2 SA with multiple RxTx TEGs

A.7.6.11.5.1 Test purpose and environment

The purpose of the test is to verify that the UE Rx-Tx measurement meets the requirements specified in clause 9.9.4.5 in AWGN propagation condition in FR2 in standalone scenario when single positioning frequency layer is configured, and when UE is requested to measure a PRS resource with multiple RxTx TEGs.

The supported test configurations in listed in Table A.7.6.11.5.1-1.

Table A.7.6.11.5.1-1: Supported test configurations

Config	Description
1	120 kHz SSB and PRS SCS, 100 MHz bandwidth, TDD duplex mode

There are two cells in the test: PCell (Cell 1) and a neighbour cell (Cell 2). All cells are on the same RF channel in FR2.

The test consists of two consecutive time intervals, with duration of T1 and T2. Cell 1 and Cell 2 mute PRS transmission during T1 and transmit PRS during T2.

The test applies to the UE supporting RxTx TEG indicated via *NR-UE-TEG-Capability* and is requested to provide the RxTx TEG in the test via *nr-UE-RxTxTEG-Request-r17* in *nr-Multi-RTT-RequestLocationInformation*. The *NR-Multi-RTT-ProvideAssistanceData* and *nr-Multi-RTT-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where ΔT = 50 ms is the maximum processing time of the multi-RTT assistance data and location information request. In *nr-Multi-RTT-RequestLocationInformation*, *measureSameDL-PRS-ResourceWithDifferentRxTEGs-r17* shall be set to 'n2'.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance containing the PRS resources.

The UE is configured with measurement gap pattern ID #13 or ID #24 before T2.

The UE is configured to transmit SRS during T2.

The general test parameters and cell specific test parameters are as given in Table A.7.6.11.5.1-2 and Table A.7.6.11.5.1-3 respectively.

Table A.7.6.11.5.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Active cell		1	Cell 1	Cell 1 is the PCell in NR-Multi-RTT-ProvideAssistanceData [34].
Neighbour cell		1	Cell 2	Cell 2 is a neighbour cell in NR-Multi-RTT-ProvideAssistanceData [34].
RF Channel Number		1	1	For both Cell 1 and Cell 2
$BW_{channel}$	MHz	1	100: $N_{RB,c}$ = 66	
SSB configuration		1	SSB.2 FR2	
SMTC configuration		1	SMTC.1	
Measurement gap		1	GP#24 or GP#13 Note 1	
CP length		1	Normal	
DRX		1	OFF	
Time offset between serving and neighbour cells	μs	1	3	Synchronous cells
T1	s	1	5	
T2	s	1	20	
NOTE 1: GP#24 is configured if UE supports MG#24, otherwise GP#13 is configured.				

Table A.7.6.11.5.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1	Setup 1 as specified in clause A.3.15			
Beam Assumption Note 7		1	Rough		Rough	
TDD configuration		1	TDDConf.3.1		TDDConf.3.1	
PDSCH RMC configuration		1	SR.3.1 TDD		N/A	
RMSI CORESET RMC configuration		1	CR.3.1 TDD		N/A	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD		N/A	
OCNG Patterns		1	OP.1		OP.1	
TRS Configuration		1	TRS.2.1 TDD		N/A	

Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1		N/A	
Active DL BWP configuration		1	DLBWP.1.1		N/A	
Active UL BWP configuration		1	ULBWP.1.1		N/A	
PRS configuration		1	PRS.1.1 FR2		PRS.1.1 FR2	
PRS muting info		1	'10'		'01'	
SRS configuration		1	POS-SRS.3		N/A	
N_{oc} Note 2	dBm/SCS	1	-89			
N_{oc} Note 2	dBm/15 kHz	1	-98			
PRS $\hat{E}_s/I_{ot}$	dB	1	-Infinity	-2.41	-Infinity	-12.12
PRS $\hat{E}_s/N_{oc}$	dB	1	-Infinity	-2	-Infinity	-10
PRS-RSRP Note 3	dBm/SCS kHz	1	-Infinity	-91	-Infinity	-99
Io	dBm/95.04 MHz	1	N/A	-57.63	N/A	-57.63
Propagation Condition		1	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: PRS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.6.11.5.2 Test requirements

The UE Rx-Tx time difference measurement time fulfils the requirements specified in clause 9.9.4.5, with $k_{multiTEG}$=2 if UE does not support or indicate value 'n1' for *measureSameDL-PRS-ResourceWithDifferentRxTEGsSimul*, and $k_{multiTEG}$=1 otherwise.

The UE shall perform and report the UE Rx-Tx time difference measurements for Cell 1 and Cell 2 within the specified UE Rx-Tx time difference measurement time starting from the beginning of time interval T2.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported UE Rx-Tx measurement for each correct event shall be within the UE Rx-Tx reporting range specified in clause 10.1.25.3.1.

A.7.6.12 PRS-RSRPP measurements

A.7.6.12.1 PRS-RSRPP reporting delay test case for single positioning frequency layer in FR2 in RRC_CONNECTED state

A.7.6.12.1.1 Test Purpose and Environment

The purpose of the test is to verify the PRS RSRPP measurement requirements specified in Clause 9.9.6.5 for single positioning frequency layer under AWGN propagation conditions in standalone scenario. Supported test configurations are shown in table A.7.6.12.1.1-1

There are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the Pcell.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2. Both cells transmit PRS during T2.

The *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message as defined in TS 37.355 shall be provided to the UE during T1. The last slot containing the two messages for the assistance data and location information request is denoted as #n.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance containing the PRS resources that is ΔT after slot #n, where ΔT = 50 ms is the maximum processing time of the assistance data and location information request.

The test parameters are as given in table A.7.6.12.1.1-2, and table A.7.6.12.1.1-3.

Table A.7.6.12.1.1-1: supported test configurations for PRS RSRPP measurement for FR2

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.6.12.1.1-2: General test parameters for PRS RSRPP measurement reporting delay

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
Active cell		Config 1	NR cell 1 (Pcell)	Cell 1 is the PCell and the DL-AoD reference cell in the positioning assistance data.
Neighbour cell		Config 1	NR cell 2	Cell 2 is a neighbour cell in the positioning assistance data.
Gap Pattern Id		Config 1	GP#13 or GP#24[Note1]	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	39	
SMTC parameters		Config 1	SMTC.1	As specified in clause A.3.11
SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
A3-Offset	dB	Config 1	-6	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used

DRX		Config 1	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3μs	Synchronous cells.
Expected RSTD	μs	Config 1	3	
Expected RSTD uncertainty	μs	Config 1	5	
T1	s	Config 1	5	
T2	s	Config 1	7	
Note 1: GP#24 is configured if UE supports MG#24, otherwise GP#13 is configured.				

Table A.7.6.12.1.1-3: Cell-specific test parameters for PRS RSRPP measurement reporting delay

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1	Setup 1 as specified in clause A.3.15			
Beam Assumption[Note 7]			Config 1	Rough		Rough	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
Duplex mode			Config 1	TDD		TDD	
$BW_{channel}$		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP BW		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
Dedicated CORESET RMC configuration			Config 1	CCR.3.1 TDD		-	
TRS configuration			Config 1	TRS.2.1 TDD		-	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120	
PRS configuration			Config 1	PRS.1.4 FR2		PRS.1.4 FR2	
PRS muting configuration			Config 1	‘10’		‘01’	
EPRE ratio of PSS to SSS							
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS			Config 1	0		0	
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							

EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15 kHz Note5		-102		-102	
N_{oc} Note2	dBm/SCS Note4	Config 1	-93		-93	
SS-RSRP Note 3	dBm/SCS Note5	Config 1	-89.7	-89.7	-Infinity	-86.7
PRS-RSRP Note 3	dBm/SCS Note5	Config 1	-Infinity	-96	-Infinity	-103
PRS $\hat{E}_s / I_{ot}$	dB	Config 1	-Infinity	-3	-Infinity	-10
PRS $\hat{E}_s / N_{oc}$	dB	Config 1	-Infinity	-3	-Infinity	-10
Io Note3	dBm/95.04 MHz Note5	Config 1	-58.56		-55.38	
Propagation Condition		Config 1	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP/PRS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.6.12.1.2 Test Requirements

The PRS RSRPP measurement time fulfils the requirements specified in Clause 9.9.6.5.The UE shall perform and report the PRS RSRPP measurements for Cell 2 with respect to the reference cell in the DL-AoD assistance data, Cell 1, within the time duration specified in section 9.9.6.5 starting from the beginning of time interval T2.

The rate of the correct events for the neighbour cell observed during repeated tests shall be at least 90%, where the reported PRS RSRPP measurement for each correct event shall be within the PRS RSRPP reporting range specified in Clause 10.1.X, i.e., between PRS RSRPP_0 and PRS RSRPP_126.

A.7.6.12.2 PRS-RSRPP reporting delay test case for single positioning frequency layer in FR2 in RRC_CONNECTED state

A.7.6.12.2.1 Test Purpose and Environment

The purpose of the test is to verify the PRS RSRPP measurement requirements specified in Clause 9.9.6.5 for single positioning frequency layer under AWGN propagation conditions in standalone scenario. Supported test configurations are shown in table A.7.6.12.2.1-1

There are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the PCell.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2. Both cells transmit PRS during T2.

The *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message as defined in TS 37.355 shall be provided to the UE during T1. The last slot containing the two messages for the assistance data and location information request is denoted as #n.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance containing the PRS resources that is ΔT after slot #n, where ΔT = 50 ms is the maximum processing time of the assistance data and location information request.

The test parameters are as given in table A.7.6.12.2.1-2, and table A.7.6.12.2.1-3.

Table A.7.6.12.2.1-1: supported test configurations for PRS RSRPP measurement for FR2

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.6.12.2.1-2: General test parameters for PRS RSRPP measurement reporting delay

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
Active cell		Config 1	NR cell 1 (Pcell)	Cell 1 is the PCell and the DL-AoD reference cell in the positioning assistance data.
Neighbour cell		Config 1	NR cell 2	Cell 2 is a neighbour cell in the positioning assistance data.
Gap Pattern Id		Config 1	GP#13 or GP#24[Note1]	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	39	
SMTC parameters		Config 1	SMTC.1	As specified in clause A.3.11
SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
A3-Offset	dB	Config 1	-6	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX		Config 1	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3μs	Synchronous cells.
Expected RSTD	μs	Config 1	3	
Expected RSTD uncertainty	μs	Config 1	5	
T1	s	Config 1	5	
T2	s	Config 1	7	

Note 1: GP#24 is configured if UE supports MG#24, otherwise GP#13 is configured.

Table A.7.6.12.2.1-3: Cell-specific test parameters for PRS RSRPP measurement reporting delay

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1	Setup 1 as specified in clause A.3.15			
Beam Assumption Note 7			Config 1	Rough		Rough	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
Duplex mode			Config 1	TDD		TDD	
$BW_{channel}$		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP BW		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
Dedicated CORESET RMC configuration			Config 1	CCR.3.1 TDD		-	
TRS configuration			Config 1	TRS.2.1 TDD		-	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120	
PRS configuration			Config 1	PRS.1.4 FR2		PRS.1.4 FR2	
PRS muting configuration			Config 1	'10'		'01'	
EPRE ratio of PSS to SSS			Config 1	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		dBm/15 kHz Note5		-102		-102	
N_{oc} Note2		dBm/SCS Note4	Config 1	-93		-93	
SS-RSRP Note 3		dBm/SCS Note5	Config 1	-89.7	-89.7	-Infinity	-86.7

PRS-RSRP Note 3	dBm/SCS Note5	Config 1	-Infinity	-96	-Infinity	-89
PRS $\hat{E}_s/I_{ot}$	dB	Config 1	-Infinity	-3	-Infinity	4
PRS $\hat{E}_s/N_{oc}$	dB	Config 1	-Infinity	-3	-Infinity	4
Io Note3	dBm/95.04 MHz Note5	Config 1	-63.5		-61.9	
Propagation Condition		Config 1	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP/PRS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.6.12.2.2 Test Requirements

The PRS RSRPP measurement time fulfils the requirements specified in Clause 9.9.6.5. The UE shall perform and report the PRS RSRPP measurements for Cell 2 with respect to the reference cell in the DL-AoD assistance data, Cell 1, within the time duration specified in section 9.9.6.5 starting from the beginning of time interval T2.

The rate of the correct events for the neighbour cell observed during repeated tests shall be at least 90%, where the reported PRS RSRPP measurement for each correct event shall be within the PRS RSRPP reporting range specified in Clause 10.1.X.Y, i.e., between PRS RSRPP_0 and PRS RSRPP_126.

A.7.6.12.3 PRS-RSRPP reporting delay test case for gapless measurement in FR2

A.7.6.12.3.1 Test Purpose and Environment

The purpose of the test is to verify the PRS RSRPP measurement requirements specified in Clause 9.9.6.6 for single positioning frequency layer under AWGN propagation conditions in standalone scenario. Reporting delay test for gapless PRS measurement is conducted assuming that the PRS has higher priority, i.e., state 1, than all other DL signals/channels and is transmitted within active DL BWP of UE. Two sub-tests are defined, sub-test 1 is for N_{sample} = 4 and sub-test 2 is for N_{sample} = 1. For sub-test 2 LMF indicates UE to perform PRS measurement with N_{sample} = 1.

The supported test configurations are shown in table A.7.6.12.3.1-1.

There are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the Pcell.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2. Both cells transmit PRS during T2.

The *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message as defined in TS 37.355 shall be provided to the UE during T1. The last slot containing the two messages for the assistance data and location information request is denoted as #n.

The beginning of the time interval T2 shall be aligned with the beginning of the first PRS processing window instance containing the PRS resources that is ΔT after slot #n, where ΔT = 50 ms is the maximum processing time of the assistance data and location information request.

The test parameters are as given in table A.7.6.12.3.1-2, and table A.7.6.12.3.1-3.

Table A.7.6.12.3.1-1: supported test configurations for PRS RSRPP measurement for FR2-FR2

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.6.12.3.1-2: General test parameters for PRS RSRPP measurement reporting delay

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
Active cell		Config 1	NR cell 1 (Pcell)	Cell 1 is the PCell and the DL-AoD reference cell in the positioning assistance data.
Neighbour cell		Config 1	NR cell 2	Cell 2 is a neighbour cell in the positioning assistance data.
PPW configuration		Config 1	Table A.3.X-1: Reference PPW configuration	As defined in A.3.X
SMTC parameters		Config 1	SMTC.1	As specified in clause A.3.11
SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
A3-Offset	dB	Config 1	-6	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX		Config 1	OFF	DRX is not used
Time offset between serving and neighbour cells	µs	1, 2, 3	- set to the UE reported capability for receive time difference threshold if the UE reported value is < 3µs - 3µs otherwise	Synchronous cells
Expected RSTD	µs	1, 2, 3	0	
Expected RSTD uncertainty	µs	1, 2, 3	Same as time offset	
T1	s	Config 1	5	
T2	ms	Config 1	10	In this test UE is configured to measure single PFL within the configured PPW.

Table A.7.6.12.3.1-3: Cell-specific test parameters during T2

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				Sub-test 1	Sub-test 2	Sub-test 1	Sub-test 2
AoA setup			Config 1	Setup 1 as specified in clause A.3.15			
Beam Assumption[Note 7]			Config 1	Rough		Rough	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
Duplex mode			Config 1	TDD		TDD	
$BW_{channel}$		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP BW		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
Dedicated CORESET RMC configuration			Config 1	CCR.3.1 TDD		-	
TRS configuration			Config 1	TRS.2.1 TDD		-	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120	
PRS configuration			Config 1	PRS.1.4 FR2		PRS.1.4 FR2	
PRS BW				48 PRBs for sub-test 2		48 PRBs for sub-test 2	
PRS muting configuration			Config 1	'10'		'01'	
EPRE ratio of PSS to SSS			Config 1	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} [Note2]		dBm/15 kHz Note5		-102		-102	
N_{oc} [Note2]		dBm/SCS Note4	Config 1	-93		-93	
SS-RSRP [Note 3]		dBm/SCS Note5	Config 1	-89.7	-89.7	-89.7	-89.7

PRS-RSRP Note 3	dBm/SCS Note5	Config 1	-96	-88	-103	-88
PRS $\hat{E}_s/I_{ot}$	dB	Config 1	-3	5	-10	5
PRS $\hat{E}_s/N_{oc}$	dB	Config 1	-3	5	-10	5
Io Note3	dBm/95.04 MHz Note5	Config 1	-58.56		-55.38	
Propagation Condition		Config 1	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols other than those in the slots with transmitted PRS.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP/PRS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.6.12.3.2 Test Requirements

The UE shall perform and report the PRS-RSRPP measurements for Cell 1 and Cell 2, within the time limit specified in clause 9.9.6.5, starting from the beginning of time interval T2.

The rate of the correct events for the neighbour cell observed during repeated tests shall be at least 90%.

A.7.6.13 UE Rx-Tx time difference measurements for PDC

A.7.6.13.1 UE Rx-Tx time difference measurement for propagation delay compensation using PRS in FR2

A.7.6.13.1.1 Test purpose and environment13

The purpose of the test is to verify that the UE Rx-Tx measurement for RTT-based PDC meets the requirements specified in clause 9.12.4.1 in AWGN propagation condition in FR2 in standalone scenario.

The supported test configurations in listed in Table A.7.6.13.1.1-1.

Table A.7.6.13.1.1-1: Supported test configurations

Config	Description
1	120 kHz SSB and PRS SCS, 100 MHz bandwidth, TDD duplex mode

The test is considered with one cell (Cell 1) in FR2.

The test consists of two consecutive time intervals, with duration of T1 and T2. If the test is based on PRS, the Cell 1 mutes PRS transmission during T1 and transmits PRS during T2.

The *MeasObjectRxTxDiff-r17* with *prs-Ref-r17* , *measObject* with *measObjectRxTxDiff-17,* and *NR-DL-PRS-PDC-Info as defined in TS 38.331* shall be provided to the UE during T1.

The last TTI containing the RRC configuration shall be provided to the UE ΔT ms before the start of T2, where ΔT = [TBD] ms.

The beginning of the time interval T2 shall be aligned with the beginning of the first PRS resources.

The UE is configured to transmit SRS during T2.

The general test parameters and cell specific test parameters are as given in Table A.7.6.13.1.1-2. The test parameters for PRS are given Table A.7.6.13.1.1-3.

Table A.7.6.13.1.1-2: General test parameters

Parameter	Unit	Test configuration	Value
Active cell		1	Cell 1
RF Channel Number		1	1
$BW_{channel}$	MHz	1	100: $N_{RB,c}$ = 66
SSB configuration		1	SSB.2 FR2
SMTC configuration		1	SMTC.1
Measurement gap		1	GP#24 or GP#13 Note 1
CP length		1	Normal
DRX		1	OFF
T1	s	1	5
T2	s	1	20
NOTE 1: GP#24 is configured if UE supports MG#24, otherwise GP#13 is configured.			

Table A.7.6.13.1.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1	
			T1	T2
TDD configuration		1	TDDConf.3.1	
PDSCH RMC configuration		1	SR.3.1 TDD	
RMSI CORESET RMC configuration		1	CR.3.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD	
OCNG Patterns		1	OP.1	
TRS Configuration		1	TRS.2.1 TDD	
Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1	DLBWP.1.1	
Active UL BWP configuration		1	ULBWP.1.1	
PRS configuration		1	PRS.1.1 FR2	
PRS muting info		1	'10'	
SRS configuration		1	[PDC-SRS.3]	
N_{oc} Note 2	dBm/SCS	1	-89	
N_{oc} Note 2	dBm/15 kHz	1	-98	
PRS $\hat{E}_s/I_{ot}$	dB	1	-Infinity	-2.41

PRS $\hat{E}_s / N_{oc}$	dB	1	-Infinity	-2
PRS-RSRP Note 3	dBm/SCS kHz	1	-Infinity	-91
Io	dBm/95.04 MHz	1	N/A	-57.63
Propagation Condition		1	AWGN	
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: PRS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

A.7.6.13.1.2 Test requirements

The UE Rx-Tx time difference measurement time fulfils the requirements specified in 9.12.4.1.

The UE shall perform and report the UE Rx-Tx time difference measurements for Cell 1 within the specified UE Rx-Tx time difference measurement time starting from the beginning of time interval T2.

The reported UE Rx-Tx measurement for each correct event shall be within the UE Rx-Tx reporting range specified in clause 10.1.25.3.1, for k=5.

The UE Rx-Tx time difference measurement time fulfils the UE Rx-Tx measurement accuracy requirements specified in clause [TBD] for Cell 1.

A.7.6.13.2 UE Rx-Tx time difference measurement for propagation delay compensation using TRS in FR2

A.7.6.13.2.1 Test purpose and environment

The purpose of the test is to verify that the UE Rx-Tx measurement with TRS for RTT-based PDC meets the requirements specified in clause 9.12.4.2 for measurement delay and clause 10.1.X.2 for measurement accuracy in AWGN propagation condition in FR2 in standalone scenario.

The supported test configurations in listed in Table A.7.6.13.2.1-1.

Table A.7.6.13.2.1-1: Supported test configurations

Config	Description
1	120 kHz SSB and PRS SCS, 100 MHz bandwidth, TDD duplex mode

The test is considered with one cell (Cell 1) in FR2.

The test consists of two consecutive time intervals, with duration of T1 and T2. Cell 1 does not have TRS transmission during T1 and transmits TRS during T2.

The *MeasObjectRxTxDiff-r17* with *csi-RS-Ref-r17*, and *measObject* with *measObjectRxTxDiff-17 as defined in TS 38.331* shall be provided to the UE during T1.

The last TTI containing the RRC configuration shall be provided to the UE ΔT ms before the start of T2, where ΔT = [10] ms is the maximum processing time of the measurement request.

The beginning of the time interval T2 shall be aligned with the beginning of the first TRS resources.

The UE is configured to transmit SRS during T2.

The general test parameters and cell specific test parameters are as given in Table A.7.6.13.2.1-2. The test parameters for PRS are given Table A.7.6.13.2.1-3.

Table A.7.6.13.2.1-2: General test parameters

Parameter	Unit	Test configuration	Value
Active cell		1	Cell 1
RF Channel Number		1	1
$BW_{channel}$	MHz	1	100: $N_{RB,c}$ = 66
SSB configuration		1	SSB.2 FR2
CP length		1	Normal
DRX		1	OFF
T1	s	1	5
T2	s	1	20

Table A.7.6.13.2.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1	
			T1	T2
AoA setup		1	Setup 1 as specified in clause A.3.15 AoA setup	
Beam Assumption Note 7		1	Rough	
TDD configuration		1	TDDConf.3.1	
PDSCH RMC configuration		1	SR.3.1 TDD	
RMSI CORESET RMC configuration		1	CR.3.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD	
OCNG Patterns		1	OP.1	
TRS Configuration		1	TRS.2.1 TDD	
Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1	DLBWP.1.1	
Active UL BWP configuration		1	ULBWP.1.1	
SRS configuration		1	PDC-SRS.3	
N_{oc} Note 2	dBm/SCS	1	-89	
N_{oc} Note 2	dBm/15 kHz	1	-98	
TRS $\hat{E}_s / I_{ot}$	dB	1	-Infinity	-[2.41]
TRS $\hat{E}_s / N_{oc}$	dB	1	-Infinity	-[2]
TRS-RSRP Note 3	dBm/SCS kHz	1	-Infinity	-[91]
Io	dBm/95.04 MHz	1	N/A	-[57.63]

Propagation Condition		1	AWGN
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.			
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 3: TRS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 4: TRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.			
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone			
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone			
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation			

A.7.6.13.2.2 Test requirements

The UE Rx-Tx time difference measurement time fulfils the requirements specified in 9.12.4.2.

The UE shall perform and report the UE Rx-Tx time difference measurements for Cell 1 within the specified UE Rx-Tx time difference measurement time starting from the beginning of time interval T2.

The UE Rx-Tx time difference measurement time fulfils the UE Rx-Tx measurement accuracy requirements specified in clause 10.1.X.2.

The reported UE Rx-Tx measurement for each correct event shall be within the UE Rx-Tx reporting range specified [in clause 10.1.25.3.1, for k=5].

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%.

A.7.6.14 SA event triggered reporting tests with Pre-MG

A.7.6.14.1 Intra-frequency measurement test with SA event triggered reporting tests: with autonomous activation/deactivation of Pre-MG in FR2

A.7.6.14.1.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event with autonomous activation/deactivation of Pre-MG. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2.

A.7.6.14.1.2 Test parameters

Supported test configurations are shown in Table A.7.6.14.1.2-1. There are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.7.6.14.1.2-2, A.7.6.14.1.2-3 and A.7.6.14.1.2-4 below.

In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A4 is used.

Before the test starts,

UE is connected to Cell 1 (PCell) on radio channel 1 (PCC).

UE is configured with 2 different UE-specific bandwidth parts for Cell 1 (PCell), BWP-1 and BWP-2, before starting the test.

BWP-1 includes bandwidth of the initial DL BWP and SSB.

BWP-2 does not include bandwidth of the initial DL BWP and SSB.

UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in PCell.

The TE schedules ontinuous DL data on PCell throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2 and T3, respectively.

During time period T1, BWP-1 is the active BWP. The Pre-MG is expected to be deactivated. UE shall be able to measure neighbor cell without gap.

The time period T2 starts when a DCI format 1_1 command for PCell DL BWP switch, sent from the test equipment to the UE, is received at the UE side in PCell's slot # denoted *i*. The UE shall switch its bandwidth part from BWP-1 to BWP-2.

During time period T3, BWP-2 is the active BWP. The Pre-MG is expected to be activated. UE shall be able to measure neighbor cell within Pre-MG.

Table A.7.6.14.1.2-1: supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.6.14.1.2-2: General test parameters for intra-frequency event triggered reporting with network-controlled activation/deactivation of Pre-MG

Parameter	Unit	Value	Comment
Active cell		PCell (Cell 1)	
Neighbour cell		Cell 2	Cell to be identified.
RF Channel Number		1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
SMTC configuration		SMTC.1	
A4-Offset	dB	-120	
CP length		Normal	
Hysteresis	dB	0	
Time To Trigger	s	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	
Gap Pattern Id		13	
Measurement gap offset	ms	39	
Time offset between Cell 1 and Cell 2		3 μs	Synchronous cells
T1	s	0.1	
T2	s	0.2	
T3	s	5	

Table A.7.6.14.1.2-3: NR Cell specific test parameters for intra-frequency event triggered reporting with network-controlled activation/deactivation of Pre-MG

Parameter	Unit	Cell 1			Cell 2		
		T1	T2	T3	T1	T2	T3
TDD configuration		TDDConf.3.1			TDDConf.3.1		
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66			100: $N_{RB,c}$ = 66		

Data RBs allocated		24	24
Intial BWP configuration		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
BWP-1 Configuration		DLBWP.1.6 ULBWP.1.6	N/A
BWP-2 Configuration		DLBWP.1.5 ULBWP.1.5	N/A
RLM-RS		CSI-RS	N/A
PDSCH RMC configuration		SR.3.2 TDD	N/A
RMSI CORESET RMC configuration		CR.3.1 TDD	N/A
Dedicated CORESET RMC configuration		CCR.3.1 TDD	N/A
TRS configuration		TRS.2.1 TDD	N/A
PDSCH/PDCCH TCI states		TCI.State.2	N/A
PDSCH/PDCCH subcarrier spacing	kHz	120	120
OCNG Patterns		OP.5	N/A
cellIndividualOffset	dB	N/A	16
SSB		SSB.1 FR2	SSB.7 FR2
Propagation Condition		AWGN	AWGN

Table A.7.6.14.1.2-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting with network-controlled activation/deactivation of Pre-MG

Parameter	Unit	Cell 1			Cell 2		
		T1	T2	T3	T1	T2	T3
AoA setup		Setup 3 defined in A.3.15.3					
		AoA1			AoA2		
Beam assumption Note 3		Rough			Rough		
E_S	dBm/SCS	-89	-89	-89	-infinity	-89	-89
$\hat{E}_s/I_{ot}$ BB Note 4	dB	-0.12	-0.12	-0.12	-Infinity	-0.12	-0.12
SSB_RP	dBm/SCS	-89	-89	-89	-infinity	-89	-89
Io	dBm/95.04MHz	-64.41	-64.41	-64.41	-Infinity	-64.41	-64.41
Time multiplexing of the downlink transmissions from each AoA		Defined in Figure A.7.6.1.1.1-1					

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 4: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

A.7.6.14.1.3 Test Requirements

During T1, the UE shall be able to receive PDSCH and report corresponding valid ACK/NACK for those PDSCHs scheduled in the slots overlapped with the Pre-MG occasions.

During T2 and T3, the UE shall not report corresponding valid ACK/NACK for those PDSCHs scheduled in the slots overlapped with the Pre-MG occasions, starting from the 1st complete Pre-MG occasion after the beginning of PCell's DL slot ($i+T_{BWPswitchDelay}$) + 5ms as defined in clause 8.19.2.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than Y ms from the beginning of time period T3, where Y is

- 3.2s for a UE supporting power class 1 and 5,
- 1.92s for a UE supporting power class 2, 3 and 4

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.14.2 Intra-frequency measurement test with SA event triggered reporting tests: with network-controlled activation/deactivation of Pre-MG in FR2

A.7.6.14.2.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event with network-controlled activation/deactivation of Pre-MG. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2.

A.7.6.14.2.2 Test parameters

Supported test configurations are shown in Table A.7.6.14.2.2-1. There are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.7.6.14.2.2-2, A.7.6.14.2.2-3 and A.7.6.14.2.2-4 below.

In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

Before the test starts,

UE is connected to Cell 1 (PCell) on radio channel 1 (PCC).

UE is configured with 2 different UE-specific bandwidth parts for Cell 1 (PCell), BWP-1 and BWP-2, before starting the test.

BWP-1 includes bandwidth of the initial DL BWP and SSB with the Pre-MG status set to ‘deactivated’.

BWP-2 does not include bandwidth of the initial DL BWP and SSB with the Pre-MG status set to ‘activated’.

UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in PCell.

The TE schedules continuous DL data on PCell throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2 and T3, respectively.

The time period T1 starts when a DCI format 1_1 command for PCell DL BWP switch, sent from the test equipment to the UE, is received at the UE side in PCell’s slot # denoted *i*. The UE shall switch its bandwidth part from BWP-1 to BWP-2.

The time period T3 starts when a DCI format 1_1 command for PCell DL BWP switch, sent from the test equipment to the UE, is received at the UE side in PCell's slot # denoted *j*. The UE shall switch its bandwidth part from BWP-2 to BWP-1.

Table A.7.6.14.2.2-1: supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.6.14.2.2-2: General test parameters for intra-frequency event triggered reporting with network-controlled activation/deactivation of Pre-MG

Parameter	Unit	Value	Comment
Active cell		PCell (Cell 1)	
Neighbour cell		Cell 2	Cell to be identified.
RF Channel Number		1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
SMTC configuration		SMTC.1	
A3-Offset	dB	-11	
CP length		Normal	
Hysteresis	dB	0	
Time To Trigger	s	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	
Gap Pattern Id		13	
Measurement gap offset	ms	39	
Time offset between Cell 1 and Cell 2		3 μs	Synchronous cells
T1	s	0.1	
T2	s	0.2	
T3	s	5	

Table A.7.6.14.2.2-3: NR Cell specific test parameters for intra-frequency event triggered reporting with network-controlled activation/deactivation of Pre-MG

Parameter	Unit	Cell 1			Cell 2		
		T1	T2	T3	T1	T2	T3
TDD configuration		TDDConf.3.1			TDDConf.3.1		
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66			100: $N_{RB,c}$ = 66		
Data RBs allocated		24			24		
Intial BWP configuration		DLBWP.0.1 ULBWP.0.1			DLBWP.0.1 ULBWP.0.1		
BWP-1 Configuration		DLBWP.1.6 ULBWP.1.6			N/A		
BWP-2 Configuration		DLBWP.1.5 ULBWP.1.5			N/A		
RLM-RS		CSI-RS			N/A		
PDSCH RMC configuration		SR.3.2 TDD			N/A		
RMSI CORESET RMC configuration		CR.3.1 TDD			N/A		
Dedicated CORESET RMC configuration		CCR.3.1 TDD			N/A		
TRS configuration		TRS.2.1 TDD			N/A		
PDSCH/PDCCH TCI states		TCI.State.2			N/A		
PDSCH/PDCCH subcarrier spacing	kHz	120			120		
OCNG Patterns		OP.5			N/A		
cellIndividualOffset	dB	N/A			16		

SSB		SSB.1 FR2	SSB.7 FR2
Propagation Condition		AWGN	AWGN

Table A.7.6.14.2.2-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting with network-controlled activation/deactivation of Pre-MG

Parameter	Unit	Cell 1			Cell 2		
		T1	T2	T3	T1	T2	T3
AoA setup		Setup 3 defined in A.3.15.3					
		AoA1			AoA2		
Beam assumption Note 3		Rough			Rough		
E_s	dBm/SCS	-89	-89	-89	-infinity	-89	-89
$\hat{E}_s / I_{ot}$ BB Note 4	dB	-0.12	-0.12	-0.12	-Infinity	-0.12	-0.12
SSB_RP	dBm/SCS	-89	-89	-89	-infinity	-89	-89
Io	dBm/95.04MHz	-64.41	-64.41	-64.41	-Infinity	-64.41	-64.41
Time multiplexing of the downlink transmissions from each AoA		Defined in Figure A.7.6.1.1.1-1					

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 4: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

A.7.6.14.2.3 Test Requirements

During T1 and T2, the UE shall not report corresponding valid ACK/NACK for those PDSCHs scheduled in the slots overlapped with the Pre-MG occasions, starting from the 1st complete Pre-MG occasion after the beginning of PCell's DL slot ($i+T_{BWPswitchDelay}$) + 5ms as defined in clause 8.19.2.

During T3, the UE shall be able to receive PDSCH and report corresponding valid ACK/NACK for those PDSCHs scheduled in the slots overlapped with the Pre-MG occasions, starting from the 1st complete Pre-MG occasion after the beginning of PCell's DL slot ($j+T_{BWPswitchDelay}$) + 5ms as defined in clause 8.19.2.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T3, where X is

- 1.6s for a UE supporting power class 1 and 5,
- 0.96s for a UE supporting power class 2, 3 and 4

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.15 SA event triggered reporting tests with concurrent gaps

A.7.6.15.1 SA event triggered reporting tests For FR2 with fully non-overlapping concurrent MGs for SSB-based inter-frequency measurements

A.7.6.15.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event with fully non-overlapping concurrent MGs for SSB-based inter-frequency measurements. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are three cells: NR cell 1 as PCell in FR2 on NR RF channel 1, NR cell 2 as neighbour cell in FR2 on NR RF channel 2, and NR cell 3 as neighbour cell in FR2 on NR RF channel 3. The test parameters and configurations are given in Tables A.7.6.15.1.1-1, A.7.6.15.1.1-2, and A.7.6.15.1.1-3.

Two measurement gaps with pattern configuration # 14 as defined in Table A.7.6.15.1.1-2 are provided for UE. The measurement object for NR RF channel 2 is associated with MG#1, and measurement object for NR RF channel 3 is associated with MG#2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2 or NR cell 3.

Supported test configurations are shown in table A.7.6.15.1.1-1.

Table A.7.6.15.1.1-1 SA event triggered reporting tests without SSB index reading for FR2 with fully non-overlapping concurrent MGs for SSB-based inter-frequency measurements

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.6.15.1.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2 with fully non-overlapping concurrent MGs for SSB-based inter-frequency measurements

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1, 2, 3	Three FR2 NR carrier frequencies is used.
Active cell		Config 1	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1	NR cell 2 and 3	NR cell 2 is on NR RF channel number 2. NR cell 3 is on NR RF channel number 3.
Gap Pattern Id		Config 1	14 for both gaps	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	79 for MG#1 19 for MG#2	
SMTC-SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
offsetMO	dB	Config 1	16	Applied to NR Cell 2 and 3 measurement object
A3-Offset	dB	Config 1	-11	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX		Config 1	OFF	DRX is not used

Time offset between serving and neighbour cells		Config 1	3μs	Cell 2 and 3 are synchronous cells to cell 1.
T1	s	Config 1	5	
T2	s	Config 1	5.2 for PC1; 3.5 for other PC	

Table A.7.6.15.1.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2 with fully non-overlapping concurrent MGs for SSB-based inter-frequency measurements

Parameter		Unit	Test configuration	Cell 1		Cell 2		Cell 3	
				T1	T2	T1	T2	T1	T2
AoA setup			Config 1	Setup 3 as specified in clause A.3.15					
				AoA1		AoA2		AoA2	
Beam Assumption[Note 4]			1,2	Rough		Rough		Rough	
NR RF Channel Number			Config 1	1		2		3	
Duplex mode			Config 1	TDD		TDD		TDD	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated			Config 1	66		66		66	
BWP BW		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A			
	Initial UL BWP			ULBWP.0.1		N/A			
	Dedicated DL BWP			DLBWP.1.1		N/A			
	Dedicated UL BWP			ULBWP.1.1		N/A			
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-		-	
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1	SMTC.1		SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120		120	
TRS configuration			Config 1	TRS.2.1 TDD		N/A		N/A	
PDSCH/PDCCH TCI state			Config 1	TCI.State.2		N/A		N/A	
EPRE ratio of PSS to SSS			Config 1	0		0		0	
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									

EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
$\hat{E}_s$	dBm/SCS	Config 1	-87	-87	-Infinity	-87	-Infinity	-87
SSBRP Note 2	dBm/SCS Note3	Config 1	-87	-87	-Infinity	-87	-Infinity	-87
$\hat{E}_s / I_{ot}$ BB Note 5	dB	Config 1	1.89	1.89	-Infinity	1.89	-Infinity	1.89
Io Note 2	dBm/95.04 MHz Note3	Config 1	-58.01	-58.01	-Infinity	-58.01	-Infinity	-58.01
Propagation Condition		Config 1	AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.Note 2: SSBRP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 5: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.

A.7.6.15.1.2 Test Requirements

The UE shall send one Event A3 triggered measurement report for each neighboring cell, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

10240 for UE supporting power class 1, or

6400 for UE supporting other power class.

The UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.15.2 SA event triggered reporting tests For FR2 with concurrent measurement gaps without SSB time index detection when DRX is not used (PCell in FR2)

A.7.6.15.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event for each neighbour cell. This test will partly verify the SA inter-frequency NR cell search requirements and collision handling between two partially-partial overlapping gaps in clause 9.1.8.

In this test, there are three cells: NR cell 1 as PCell in FR2 on NR RF channel 1, NR cell 2 as neighbour cell in FR2 on NR RF channel 2 and NR cell 3 as another neighbour cell in FR2 on NR RF channel 3. The test parameters and configurations are given in Tables A.7.6.15.2.1-1, A.7.6.15.2.1-2, and A.7.6.15.2.1-3.

Two measurement gaps are configured to UE with measurement gap pattern configuration #13 and #14 respectively. Measurement gap with pattern #13 is associated with inter-frequency measurement on NR cell 2, and measurement

gap with pattern #14 is associated with inter-frequency measurement on NR cell 3. Measurement gap pattern configuration # 13 and #14 as defined in Table A.7.6.15.2.1-2 are provided to for UE that does not support per-FR gap and for UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2 and NR cell 3.

Supported test configurations are shown in table A.7.6.15.2.1-1.

Table A.7.6.15.2.1-1 SA event triggered reporting tests without SSB index reading for FR2-FR2

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: Void.	

Table A.7.6.15.2.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2 concurrent gap with partially partial overlapping scenario for SSB-based measurements without SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1, 2, 3	Three FR2 NR carrier frequencies is used.
Active cell		Config 1	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
1st Neighbour cell		Config 1	NR cell 2	NR cell 2 is on NR RF channel number 2.
2nd Neighbour cell		Config 1	NR cell 3	NR cell 3 is on NR RF channel number 3.
1st Gap Pattern Id		Config 1	13	As specified in clause 9.1.2-1.
2nd Gap Pattern Id		Config 1	14	As specified in clause 9.1.2-1.
1st gap offset		Config 1	39	
2nd gap offset		Config 1	4	
1st gap priority		Config 1	1	Second level priority
2nd gap priority		Config 1	2	Highest priority
SMTC-SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
offsetMO	dB	Config 1	16	Applied to NR Cell 2 and NR Cell 3 measurement objects
A3-Offset	dB	Config 1	-11	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX		Config 1	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3μs	Synchronous cells.
T1	s	Config 1	5	
T2	s	Config 1	5.2 for PC1; 3.5 for other PC	

Table A.7.6.15.2.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2 without SSB time index detection

Parameter	Unit	Test configuration	Cell 1		Cell 2		Cell 3	
			T1	T2	T1	T2	T1	T2

AoA setup			Config 1	Setup 3 as specified in clause A.3.15					
				AoA1		AoA2		AoA3	
Beam Assumption[Note 7]			1,2	Rough		Rough		Rough	
NR RF Channel Number			Config 1	1		2		3	
Duplex mode			Config 1	TDD		TDD		TDD	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated			Config 1	66		66		66	
BWP BW		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A		N/A	
	Initial UL BWP			ULBWP.0.1		N/A		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-		-	
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1	SMTC.1		SMTC.1		SMTC.7	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120		120	
TRS configuration			Config 1	TRS.2.1 TDD		N/A		N/A	
PDSCH/PDCCH TCI state			Config 1	TCI.State.2		N/A		N/A	
EPRE ratio of PSS to SSS			Config 1	0		0		0	
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
$\hat{E}_s$		dBm/SCS	Config 1	-87	-87	-Infinity	-87	-Infinity	-87
SSBRP [Note 3]		dBm/SCS [Note5]	Config 1	-87	-87	-Infinity	-87	-Infinity	-87
$\hat{E}_s / I_{ot}$ BB [Note 8]		dB	Config 1	1.89	1.89	-Infinity	1.89	-Infinity	1.89
Io[Note3]		dBm/95.04 MHz Note5	Config 1	-58.01	-58.01	-Infinity	-58.01	-Infinity	-58.01
Propagation Condition			Config 1	AWGN				AWGN	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Void
Note 3:	SSBRP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Void
Note 5:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6:	As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 8:	Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.

A.7.6.15.2.2 Test Requirements

For both NR cell 2 and NR cell 3, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

10240 for UE supporting power class 1, or

6400 for UE supporting other power class.

The UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.15.3 SA event triggered reporting tests for FR2 concurrent gap with partially partial overalpping scenario for SSB-based measurements and PRS-based measurement

A.7.6.15.3.1 Test Purpose and Environment

The purpose of this test is to verify that the concurrent gap capable UE makes correct reporting of events. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4 and PRS-RSRP measurement delay requirements specified in clause 9.9.3.5.

In this test, there are three cells: NR cell 1 as PCell in FR2 on NR RF channel 1, NR cell 2 as neighbour cell in FR2 on NR RF channel 2, and NR cell 3 as neighbour cell in FR2 on NR RF channel 1. The test parameters are given in Tables A.7.6.15.3.1-1, A.7.6.15.3.1-2 and A.7.6.15.3.1-3.

Two measurement gap patterns (MeasGapId #0 and MeasGapId #1) are configured with the gap pattern ID #0 and #1 as defined in Table A.7.6.15.3.1-2. MeasGapId #1 is configured with a higher priority than MeasGapId #0. MeasGapId #0 and MeasGapId #1 are associated with the MOs for RF channel numbers #1 and #2, respectively.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used for carrier 2. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2 and NR cell 3. Cell 1 and cell 3 transmit PRS during T2.

The *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message as defined in TS 37.355 shall be provided to the UE during T1. The last slot containing the two messages for the assistance data and location information request is denoted as #n.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance of MeasGapId #1 containing the PRS resources that is ΔT after slot #n, where ΔT = 50 ms is the maximum processing time of the assistance data and location information request.

Table A.7.6.15.3.1-1: SA event triggered reporting tests for FR2

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.6.15.3.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2 concurrent gap with partially partial overalpping scenario for SSB-based measurements and PRS measurement

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1: Cell 1 and Cell 3 2: Cell 2	Two TDD carrier frequencies are used for the NR cells.
Active cell		Config 1	NR cell 1 (Pcell)	Cell 1 is the PCell and the DL-AoD reference cell in the positioning assistance data.
Neighbour cell		Config 1	NR cell 2, NR cell 3	Cell 2 is an inter-frequency cell neighbor cell Cell 3 is a neighbour cell in the positioning assistance data.
Gap Pattern Id		Config 1	0 for MeasGapId #0 1 for MeasGapId #1	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	7 for MeasGapId #0 11 for MeasGapId #1	
A3-Offset	dB	Config 1	-6	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX		Config 1	OFF	DRX is not used
Time offset between cell 1 and neighbour cell 2		Config 1	3μs	Synchronous cells.
Time offset between cell 1 and neighbour cell 3		Config 1	3μs	Synchronous cells.
Expected RSTD between cell 1 and cell 3	μs	Config 1	3	
Expected RSTD uncertainty between cell 1 and cell 3	μs	Config 1	5	
T1	s	Config 1	5	
T2	s	Config 1	11	

Table A.7.6.15.3.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 concurrent gap with partially-partial overalpping scenario for SSB-based measurements and PRS measurement

Parameter	Unit	Test configuration	Cell 1		Cell 2		Cell 3	
			T1	T2	T1	T2	T1	T2

AoA setup			Config 1	Setup 1 as specified in clause A.3.15					
Beam Assumption[Note 7]			Config 1	Rough		Rough		Rough	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1		TDDConf.3.1	
Duplex mode			Config 1	TDD		TDD		TDD	
$BW_{channel}$		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP BW		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A			
	Initial UL BWP			ULBWP.0.1		N/A			
	Dedicated DL BWP			DLBWP.1.1		N/A			
	Dedicated UL BWP			ULBWP.1.1		N/A			
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-		-	
Dedicated CORESET RMC configuration			Config 1	CCR.3.1 TDD		-		-	
TRS configuration			Config 1	TRS.2.1 TDD		-		-	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120		120	
SSB parameters			Config 1	SSB.1 FR2		SSB.1 FR2		SSB.1 FR2	
SMTC configuration defined in A.3.11			Config 1	SMTC.4		SMTC.4		SMTC.4	
PRS configuration			Config 1	PRS.1.1 FR2		N/A		PRS.1.2 FR2	
PRS muting configuration			Config 1	'10'		N/A		'01'	
EPRE ratio of PSS to SSS			Config 1	0		0		0	
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} [Note2]		dBm/15kHz Note5		-102		-104.7		-102	
N_{oc} [Note2]		dBm/SCS Note4	Config 1	-93		-95.7		-93	
SS-RSRP [Note 3]		dBm/SCS Note5	Config 1	-89.7	-89.7	-Infinity	-86.7	-Infinity	-86.7
PRS-RSRP [Note 3]		dBm/SCS Note5	Config 1	-Infinity	-96	N/A	N/A	-Infinity	-103
PRS $\hat{E}_s / I_{ot}$		dB	Config 1	-Infinity	-3	N/A	N/A	-Infinity	-10
PRS $\hat{E}_s / N_{oc}$		dB	Config 1	-Infinity	-3	N/A	N/A	-Infinity	-10

Io[Note3]	dBm/95.04 MHz Note5	Config 1	-58.56	-66.7	-57.2	-57.2
Propagation Condition		Config 1	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP/PRS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.6.15.3.2 Test Requirements

The UE shall send one Event A3 triggered measurement report for cell 2, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

10240 for UE supporting power class 1, or

6400 for UE supporting other power class.

The PRS RSRP measurement time fulfils the requirements specified in Clause 9.9.3.5. The UE shall perform and report the PRS RSRP measurements for Cell 2 with respect to the reference cell in the DL-AoD assistance data, Cell 1, within the time duration specified in section 9.9.3.5 starting from the beginning of time interval T2.

The rate of the correct events for the neighbour cell observed during repeated tests shall be at least 90%, where the reported PRS RSRP measurement for each correct event shall be within the PRS RSRP reporting range specified in Clause 10.1.24.3, i.e., between PRS RSRP_0 and PRS RSRP_126.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

IUE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.16 SA event triggered reporting tests with NCSG

A.7.6.16.1 SA event triggered reporting test with per-UE NCSG under non-DRX

A.7.6.16.1.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2.7.1 and 9.2.7.2, and also verify the scheduling availability during intra-frequency measurement with NCSG in clause 9.2.7.3. Supported test configurations are shown in table A.7.6.16.1.1-1.

The serving frequency should be selected for which UE reports ‘ncsg’.

Table A.7.6.16.1.1-1: supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.7.6.16.1.1-2 ~ 4 below.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

During T2, the UE is continuously scheduled with data on the PCell.

The UE is capable of NCSG and report '*ncsg*' through *NeedForGapNCSG-InfoNR* for PCell.

In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

Table A.7.6.16.1.1-2: General test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 with per-UE NCSG without DRX

Parameter	Unit	Config	Value	Comment
Active cell		1, 2	PCell (Cell 1)	
Neighbour cell		1, 2	Cell 2	Cell to be identified.
RF Channel Number		1, 2	1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
NCSG type		1, 2	Per-FR	
NCSG pattern		1, 2	13	
NCSG repitition periodicity	ms	1, 2	40	
ML	ms	1, 2	5	
NCSG offset	ms	1, 2	39	
SMTC configuration		1, 2	SMTC.1	
CSI-RS parameters		1, 2	CSI-RS.3.2 TDD	
A3-Offset	dB	1, 2	-11	
CP length		1, 2	Normal	
Hysteresis	dB	1, 2	0	
Time To Trigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX		1, 2	OFF	
Time offset between Cell 1 and Cell 2		1, 2	3 μs	Synchronous cells
T1	s	1, 2	5	
T2	s	1, 2	5	

Table A.7.6.16.1.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 with per-UE NCSG without DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	1, 2	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		1	24		24	
		2	48		48	

Intial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Active DL BWP configuration		1, 2	DLBWP.1.2	DLBWP.1.1
Active UL BWP configuration		1, 2	ULBWP.1.2	ULBWP.1.1
RLM-RS		1, 2	CSI-RS	SSB
PDSCH RMC configuration		1	SR.3.2 TDD	N/A
		2	SR.3.3 TDD	
RMSI CORESET RMC configuration		1	CR.3.1 TDD	CR.3.1 TDD
		2	CR.3.2 TDD	CR.3.2 TDD
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD	CCR.3.1 TDD
		2	CCR.3.7 TDD	CCR.3.7 TDD
TRS configuration		1, 2	TRS.2.1 TDD	N/A
PDSCH/PDCCH TCI states		1, 2	TCI.State.2	N/A
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	120	120
OCNG Patterns		1, 2	OP.5	N/A
cellIndividualOffset	dB	1~2	N/A	16
SSB		1	SSB.3 FR2	SSB.7 FR2
		2	SSB.4 FR2	SSB.8 FR2
Propagation Condition		1, 2	AWGN	AWGN

Table A.7.6.16.1.1-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 with per-UE NCSG without DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1, 2	Setup 3 defined in A.3.15.3			
			AoA1		AoA2	
Beam Assumption[Note 4]		1,2	Rough		Rough	
E_s	dBm/SCS	1	-89	-89	-Infinity	-89
		2	-86	-86	-Infinity	-86
$\hat{E}_s/I_{ot}$ BB Note 5	dB	1, 2	-0.12	-0.12	-Infinity	-0.12
SSB_RP	dBm/SCS	1	-89	-89	-Infinity	-89
		2	-86	-86	-Infinity	-86
Io	dBm/95.04MHz	1	-64.41	-64.41	-Infinity	-64.41
		2	-61.41	-61.41	-Infinity	-61.41
Time multiplexing of the downlink transmissions from each AoA		1	Defined in Figure A.7.6.16.1.1-1			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Void
Note 3: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 5: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

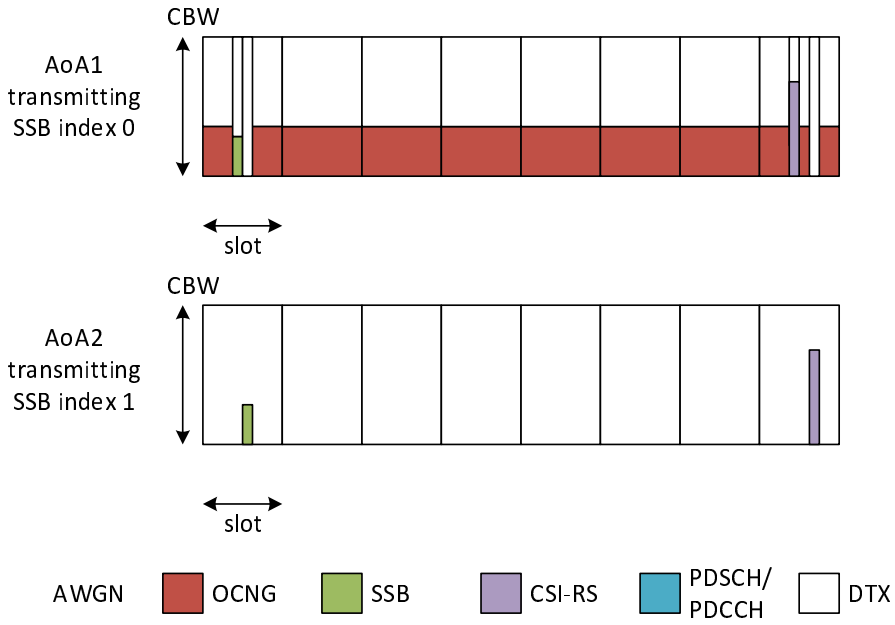

Figure A.7.6.16.1.1-1: Time multiplexed downlink transmissions (Config 1 example)

A.7.6.16.1.2 Test Requirements

In the test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 3.2s for a UE supporting power class 1,
- 1.92s for a UE supporting power class 2, 3 and 4

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

During T2, UE shall send HARQ ACK/NACK for the corresponding PDSCH scheduled in PCell in all the slots except for the case where PDSCH or PUCCH is overlapped with the VIL of NCSG pattern.

NOTE: The actual overall delays measured in the test may be up to 2xTTIDCCH higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.16.2 SA event triggered reporting tests on inter-frequency measurement with NCSG for FR2 when DRX is not used (PCell in FR2)

A.7.6.16.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.10. The test will partly verify the interruption requirements on PCell in clause 9.1.9.1.

The serving frequency and the target frequency should be selected such that UE reports 'ncsg' for the target frequency given the serving frequency.

In this test, there are two cells: NR cell 1 as PCell in FR2 on NR RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.7.6.16.2.1-1, A.7.6.16.2.1-2, and A.7.6.16.2.1-3.

In test 1 measurement gap pattern configuration # 0 as defined in A.7.6.162.1-2 is provided for a UE that does not support *ncsg-MeasGapPerFR-r17*, and in test 2 measurement gap pattern configuration #13 as defined in Table A.7.6.16.2.1-2 is provided for UE that support *ncsg-MeasGapPerFR-r17*. If a UE supports *ncsg-MeasGapPerFR-r17*, it is only required to pass test 2. Otherwise it is only required to pass test 1.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Supported test configurations are shown in table A.7.6.16.2.1-1.

Table A.7.6.16.2.1-1 SA event triggered reporting tests with NCSG without SSB index reading for FR2-FR2

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: Void.	

Table A.7.6.16.2.1-2: General test parameters for SA inter-frequency event triggered reporting with NCSG for FR2 without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1	1, 2		Two FR2 NR carrier frequencies is used.
Active cell		Config 1	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1	NR cell 2		NR cell 2 is on NR RF channel number 2.
NCSG Pattern Id		Config 1	0	13	As specified in clause 9.1.9.3-1.
NCSG offset		Config 1	39		
SMTC-SSB parameters		Config 1	SSB.3 FR2		As specified in clause A.3.10.2
offsetMO	dB	Config 1	16		Applied to NR Cell 2 measurement object
A3-Offset	dB	Config 1	-11		
Hysteresis	dB	Config 1	0		
CP length		Config 1	Normal		
TimeToTrigger	s	Config 1	0		
Filter coefficient		Config 1	0		L3 filtering is not used
DRX		Config 1	OFF		DRX is not used
Time offset between serving and neighbour cells		Config 1	3μs		Synchronous cells.
T1	s	Config 1	5		
T2	s	Config 1	5.2 for PC1; 3.5 for other PC		

Table A.7.6.16.2.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting with NCSG for FR2 without SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1	Setup 3 as specified in clause A.3.15			
				AoA1		AoA2	
Beam Assumption[Note 7]			1,2	Rough		Rough	
NR RF Channel Number			Config 1	1		2	
Duplex mode			Config 1	TDD		TDD	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated			Config 1	66		66	
BWP BW		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1			Config 1	OP.2		OP.2	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120	
TRS configuration			Config 1	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI state			Config 1	TCI.State.2		N/A	
EPRE ratio of PSS to SSS			Config 1	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		dBm/15 kHz Note5		-104.7		-104.7	

N_{oc} Note2	dBm/SCS Note4	Config 1	-95.7		-95.7	
$\hat{E}_s/N_{oc}$	dB	Config 1	6	6	-Infinity	9
SSB_RP Note 3	dBm/SCS Note5	Config 1	-89.7	-89.7	-Infinity	-86.7
$\hat{E}_s/I_{ot}$ BB Note 8	dB	Config 1	6	6	-Infinity	9
Io Note3	dBm/95.04 MHz Note5	Config 1	-59.74	-59.74	-Infinity	-57.2
Propagation Condition		Config 1	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: SSB_RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Void
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 8: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.

A.7.6.16.2.2 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

5120 for UE supporting power class 1, or

3200 for UE supporting other power class.

The UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

The UE shall be scheduled on PCell continuously throughout the test. During the time duration T2, the interruption on PCell shall not be more than the values specified for SA in clause 9.1.9.1.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

NOTE: For a UE that supports per-FR NCSG, it only needs to pass test case with per-FR NCSG, otherwise, it only needs to pass test case with per-UE NCSG.

A.7.6.16.3 Event triggered reporting test on deactivated Scell measurement via NCSG in FR2 in non-DRX

A.7.6.16.3.1 Test Purpose and Environment

The purpose of this test is to verify that the delay and interruption requirements for deactived SCell measurement stated in clause 9.2.7 and 8.2 respectively, when both PCell and SCell are in FR2.

The supported test configurations are shown in Table A.7.6.16.3.1-1 below. The general test parameters are defined in Table A.7.6.16.3.1-2. Three cells are deployed in the test, which are one FR2 PCell (Cell 1) on frequency 1 and one FR2 SCell (Cell 2) on frequency 2 and one neighboring cell (Cell3) on frequency 2. The cell-specific test parameters are given in A.7.6.16.3.1-3 below. OTA related test parameters are shown in table A.7.6.16.3.1-4 below.

In the measurement control information, a measurement object is configured for the frequency of the SCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of 2 successive time periods, with duration of T1 and T2, respectively.

Before the test starts the UE is connected to PCell (Cell 1) but is not aware of SCell (Cell 2) nor the neighboring cell (Cell 3). The UE is only monitoring the PCC. The UE shall be continuously scheduled in the PCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 2) becomes configured on radio channel 2. The UE now starts monitoring the deactivated SCC.

NCSG is configured with the NCSG pattern ID #0 as defined in Table A.7.6.16.3.1-2.

Table A.7.6.16.3.1-1: Supported test configurations for FR2 deactivated Scell measurement via NCSG

Configuration	Description
1	NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
Note 1: Same configuration applies to both PCell and SCell	

Table A.7.6.16.3.1-2: General test parameters for FR2 deactivated Scell measurement via NCSG

Parameter	Unit	Value	Comment
RF Channel Number		1, 2	Two NR radio channels are used for this test. Cell 1 uses RF channel 1. Cell 2 and Cell 3 use RF channel 2.
Hysteresis	dB	0	
A3-Offset	dBm	-11	
TimeToTrigger	s	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	DRX is not used
NCSG Pattern Id		0	As specified in clause Table 9.1.9.3-1.
NCSG offset	ms	39	
NCSG mgta	ms	0	
Time offset between Cell 2 and Cell 3	us	3	Synchronous cells
SCell measurement cycle (measCycleSCell)	ms	160	
T1	s	5	
T2	s	15	

Table A.7.6.16.3.1-3: Cell specific test parameters for FR2 deactivated Scell measurement via NCSG

Parameter[Note 5]	Unit	Cell 1	Cell 2	Cell 3
SSB ARFCN		freq1	freq2	freq2
Duplex mode		TDD		
TDD configuration		TDDConf.3.1		
Downlink initial BWP Configuration		DLBWP.0.1	DLBWP.0.1	DLBWP.0.1
Downlink dedicated BWP Configuration		DLBWP.1.1	DLBWP.1.1	DLBWP.1.1
Uplink initial BWP configuration		ULBWP.0.1	ULBWP.0.1	ULBWP.0.1
Uplink dedicated BWP configuration		ULBWP.1.1	ULBWP.1.1	ULBWP.1.1

TRS configuration		TRS.2.1 TDD	TRS.2.1 TDD	N/A
TCI state		TCI.State.0	TCI.State.0	N/A
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66		
Data RBs allocated		24	24	24
PDSCH Reference measurement channel		SR.3.2 TDD	SR.3.2 TDD	N/A
RMSI CORESET Parameters		CR.3.1 TDD	-	N/A
Dedicated CORESET Parameters		CCR.3.1 TDD	CCR.3.1 TDD	N/A
OCNG Patterns		OP.1	OP.5	N/A
SSB Configuration		SSB.1 FR2	SSB.1 FR2	SSB.7 FR2
SMTC Configuration		SMTC.1	SMTC.1	
cellIndividualOffset		N/A	N/A	16
EPRE ratio of PSS to SSS	dB	0		
EPRE ratio of PBCH_DMRS to SSS				
EPRE ratio of PBCH to PBCH_DMRS				
EPRE ratio of PDCCH_DMRS to SSS				
EPRE ratio of PDCCH to PDCCH_DMRS				
EPRE ratio of PDSCH_DMRS to SSS				
EPRE ratio of PDSCH to PDSCH_DMRS				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
Propagation conditions		AWGN		
Note 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.				

Table A.7.6.16.3.1-4: OTA related test parameters for FR2 deactivated Scell measurement via NCSG

Parameter	Unit	Cell 1		Cell 2		Cell 3	
		T1	T2	T1	T2	T1	T2
Angle of arrival configuration		Setup 3 defined in A.3.15.3					
		AoA1		AoA1		AoA2	
Assumption for UE beams Note 3		Rough		Rough		Rough	
E_s	dB	-89		-89	-89	-infinity	-89
SSB_RP Note2	dBm/SCS Note4	-89		-89	-89	-infinity	-89
$\hat{E}_s/I_{ot}$ BB Note 4	dB	-0.12		-0.12	-0.12	-infinity	-0.12
Io Note2	dBm/95.04 MHz Note4	-64.41		-64.41	-64.41	--infinity	-64.41
Time multiplexing of the downlink transmissions from each AoA		N/A		Defined in Figure A.7.6.1.1.1-1			
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 2: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation. Note 4: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4							

A.7.6.16.3.2 Test Requirements

UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X1 ms from the beginning of time period T2, where X1 is

12.8s for UE supporting power class 1 and 5, or

7.68s for UE supporting other power class.

UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

During the T1 and T2, UE be able to report ACK/NACK for all slots with PDCCH/PDSCH on PCell excluding those slots overlapped with

VIL1, ML and VIL2 of NCSG for intra-band FR2 CA

VIL1 and VIL2 of NCSG for inter-band FR2 CA

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.7 Measurement Performance requirements

Unless explicitly stated otherwise:

- Reported measurements shall be within defined range of accuracy limits defined in Clause 10 for at least 90 % of the reported cases. If multiple measurement performance requirements are verified in the same test, the reported measurements for each requirement shall be within defined range of accuracy limits of the corresponding requirement defined in Clause 10 for at least 90% of the reported cases.
- Measurements are performed in RRC_CONNECTED state.
- The reference channels assume transmission of PDSCH with a maximum number of 5 HARQ transmissions unless otherwise specified.

A.7.7.1 SS-RSRP

A.7.7.1.1 SA intra-frequency case measurement accuracy with FR2 serving cell and FR2 target cell

A.7.7.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1.3.1.1 and 10.1.3.1.2 for intra-frequency measurements.

A.7.7.1.1.2 Test parameters

In this set of test cases all cells are on the same carrier frequency. Supported test configurations are shown in Table A.7.7.1.1.2-1. Both absolute and relative accuracy of SS-RSRP intra-frequency measurements are tested by using the parameters in Table A.7.7.1.1.2-2 and A.7.7.1.1.2-3. In all test cases, Cell 1 is the PCell and Cell 2 the target cell. The TCI status for Cell 1 is defined in Table A.3.16.2-1 and TRS configuration for Cell 1 is defined in Table A.3.17.2.1-1. The test consists of two time phases T1 and T2.

Table A.7.7.1.1.2-1: SS-RSRP Intra frequency SS-RSRP supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.7.1.1.2-2: SS-RSRP Intra frequency general test parameters

Parameter	Unit	T1		T2	
		Cell 1	Cell 2	Cell 1	Cell 2

Cell ID		489	0	489	0
SSB ARFCN		freq1		freq1	
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		24		24	
Downlink initial BWP configuration		DLBWP.0.1	-	DLBWP.0.1	-
Downlink dedicated BWP configuration		DLBWP.1.1	-	DLBWP.1.1	-
Uplink initial BWP configuration		ULBWP.0.1	-	ULBWP.0.1	-
Uplink dedicated BWP configuration		ULBWP.1.1	-	ULBWP.1.1	-
DRX cycle configuration		Not applicable	-	Not applicable	-
TRS configuration		TRS.2.1 TDD	-	TRS.2.1 TDD	-
TCI state		TCI.State.0	-	TCI.State.0	-
PDSCH Reference measurement channel		SR.3.2TDD	-	SR.3.2 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-
Dedicated CORESET Reference channel		CCR.3.1 TDD	-	CCR.3.1 TDD	-
OCNG Patterns		OP.3	OP.3	OP.3	OP.3
SSB configuration		SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
SMTC configuration		SMTC.1	SMTC.1	SMTC.1	SMTC.1
Time offset with Cell 1	μs	-	3	-	3
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS[Note 1]					

EPRE ratio of OCNG to OCNG DMRS Note 1					
Propagation conditions		AWGN	AWGN	AWGN	AWGN
Antenna configuration		1x2	1x2	1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: Void
Note 4: Void
Note 5: Void

Table A.7.7.1.1.2-3: SS-RSRP Intra frequency OTA related test parameters

Parameter	Unit	T1		T2	
		Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1			
Assumption for UE beams Note 7		Rough		Rough	
N_{OC} Note1	dBm/15kHz Note4	-91.6		N/A	
N_{OC} Note1	dBm/SCS Note4	-82.6		N/A	
$\hat{E}_s / N_{oc}$	dB	6.0	1.0	N/A	N/A
E_s	dBm/SCS Note4			(Table B.2.2-2 Rx Beam Peak +2.1dB)	(Table B.2.2-2 Rx Beam Peak +2.1dB)
SSB_RP Note2	dBm/SCS	-76.6	-81.6	(Table B.2.2-2 Rx Beam Peak +2.1dB)	(Table B.2.2-2 Rx Beam Peak +2.1dB)
$\hat{E}_s / I_{ot\ BB}$ Note6	dB	2.44	-5.98	-5.98	-5.98
Io Note2	dBm/95.04 MHz Note4	-50.05		(Table B.2.2-2 Rx Beam Peak +29.70dB)	

Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SSB_RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: Void
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5: Void
Note 6: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.7.1.1.3 Test Requirements

The SS-RSRP measurement accuracy shall fulfil the absolute accuracy requirements in clauses 10.1.3.1.1 and relative accuracy requirements in clause 10.1.3.1.2. The following requirements are to be verified:

During T1:

Absolute accuracy of Cell 1 and absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in table A.7.7.1.1.3-1.

Relative accuracy of Cell 2 compared with Cell 1. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in Table 10.1.3.1.2-1.

During T2:

Absolute accuracy of Cell 1 and absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in table A.7.7.1.1.3-1.

Relative accuracy of Cell 2 compared with Cell 1. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in Table 10.1.3.1.2-1.

During T1 and T2:

Relative accuracy of Cell 1 during T2 compared with Cell 1 during T1. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in Table 10.1.3.1.2-1

Relative accuracy of Cell 2 during T2 compared with Cell 2 during T1. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in Table 10.1.3.1.2-1.

Table A.7.7.1.1.3-1: SS-RSRP absolute accuracy test requirement

	Test requirement Notes1,2,3
Cell 1	SSB_RP1 -δ +G_{min} ≤ Reported RSRP(dBm) ≤ SSB_RP1 +δ +G_{max}
Cell 2	SSB_RP2 -δ +G_{min} ≤ Reported RSRP(dBm) ≤ SSB_RP2 +δ +G_{max}
Note 1:	SSB_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration
Note 2:	δ is the RSRP absolute accuracy requirement from Table 10.1.3.1.1-1, selected according to the Io used in the test
Note 3:	G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class

A.7.7.1.2 SA inter-frequency case measurement accuracy with FR2 serving cell and FR2 target cell

A.7.7.1.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1.5.1.1 and 10.1.5.1.2 for intrer-frequency measurements with the testing configurations for NR cells in Table A.7.7.1.2.1-1.

Table A.7.7.1.2.1-1: Applicable NR configurations for FR2 inter-frequency SS-RSRP accuracy test

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

A.7.7.1.2.2 Test parameters

In this set of test cases there are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on a different frequency than the PCell. The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 1 and Cell 2 are given in Table A.7.7.1.2.2-1 and Table A.7.7.1.2.2-2 below. Both absolute and relative accuracy of RSRP inter-frequency measurements are tested by using the parameters in Table A.7.7.1.2.2-1 and Table A.7.7.1.2.2-1. The inter-frequency measurements are supported by a measurement gap.

Table A.7.7.1.2.2-1: SS-RSRP inter-frequency test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN	1~2		freq1	freq2	freq1	freq2
$BW_{channel}$	1~2		100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated	1		24		24	
	2		48		48	
Gap pattern ID			0		0	
Duplex mode	1~2		TDD		TDD	
TDD configuration	1~2		TDDConf.3.1		TDDConf.3.1	
PDSCH Reference measurement channel	1		SR.3. 2 TDD	-	SR.3. 2 TDD	-
	2		SR.3.3 TDD		SR.3.3 TDD	
RMSI CORESET Reference Channel	1		CR.3.1 TDD	-	CR.3.1 TDD	-
	2		CR.3.2 TDD		CR.3.2 TDD	
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD	-	CCR.3.1 TDD	-
	2		CCR.3.7 TDD		CCR.3.7 TDD	
SSB configuration	1		SSB.3 FR2		SSB.3 FR2	
	2		SSB.4 FR2		SSB.4 FR2	
PDSCH/PDCCH subcarrier spacing	1~2	kHz	120		120	
OCNG Patterns	1~2		OP.3		OP.3	
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration	1~2		DLBWP.1.3 ULBWP.1.3		DLBWP.1.3 ULBWP.1.3	
TRS Configuration	1~2		TRS.2.1 TDD		TRS.2.1 TDD	
PDCCH/PDSCH TCI Configuration	1~2		TCI.State.2		TCI.State.2	
SMTC configuration	1~2		SMTC.1		SMTC.1	
Time offset between Cell 2 and Cell 1	1~2	µs	3		3	
EPRE ratio of PSS to SSS	1~2	dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS Note 1						
EPRE ratio of OCNG to OCNG DMRS Note 1						
Propagation condition	1~2	-	AWGN	AWGN	AWGN	AWGN
Antenna configuration	1~2	-	1x2	1x2	1x2	1x2

Note 1:	OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Void.

Table A.7.7.1.2.2-2: SS-RSRP inter frequency OTA related test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration	1~2		Setup 4b according to clause A.3.15.4.2		Setup 4b according to clause A.3.15.4.2	
			AoA1 Spherical coverage	AoA2 Rx Beam Peak	AoA1 Spherical coverage	AoA2 Rx Beam Peak
Assumption for UE beams Note 7	1~2		Rough		Rough	
N_{oc} Note1	1	dBm/15kHz Note4	-90.6	-90.6	(Table B.2.3-2 Rx Beam Peak Note 8 +1.97dB)	(Table B.2.3-2 Rx Beam Peak Note 8 -3.03dB)
	2		-93.7	-93.7		
N_{oc} Note1	1	dBm/SCS Note4	-81.6	-81.6	(Table B.2.3-2 Rx Beam Peak Note 8 +11.0dB)	(Table B.2.3-2 Rx Beam Peak Note 8 +6.0dB)
	2		-81.7	-81.7	(Table B.2.3-2 Rx Beam Peak Note 8 +14.0dB)	(Table B.2.3-2 Rx Beam Peak Note 8 +9.0dB)
$\hat{E}_s / N_{oc}$	1~2	dB	6.0	6.0	17.0	-1.0
SSB_RP Note2	1	dBm/SCS	-75.6	-75.6	(Table B.2.3-2 Rx Beam Peak Note 8 +28.0dB)	(Table B.2. 3-2 Rx Beam Peak Note 8 +5.0dB)
	2		-75.7	-75.7	(Table B.2.3-2 Rx Beam Peak Note 8 +31.0dB)	(Table B.2. 3-2 Rx Beam Peak Note 8 +8.0dB)
($SSB_RP_{Cell\ 1}$ – $SSB_RP_{Cell\ 2}$)	1~2	dB	0		23.00	
$\hat{E}_s / I_{ot\ BB}$ Note6	1	dB	5.26	5.96	9.53	-3.46
	2		4. 61	5.91		
Io Note2	1	dBm/95.04 MHz Note4	-50.00	-50.00	(Table B.2.3-2 Rx Beam Peak Note 8 +52.68dB)	(Table B.2.3-2 Rx Beam Peak Note 8 +33.13dB)
	2		-50.09	-50.09	(Table B.2.3-2 Rx Beam Peak Note 8 +55.69dB)	(Table B.2.3-2 Rx Beam Peak Note 8 +36.14dB)
($Io_{freq\ 1}$ – $Io_{freq\ 2}$)	1~2	dB	0		19.55	

Note 1:	Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2:	SSB_RP, Es/Iot, Io, ($SSB_RP_{Cell\ 2}$ – $SSB_RP_{Cell\ 1}$) and ($Io_{freq\ 2}$ – $Io_{freq\ 1}$) levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	Void
Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5:	Void
Note 6:	Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P or ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 8:	The value in Table B.2.3-2 is the Minimum SSB_RP for SCS_{SSB} = 120 kHz, selected according to the operating band of Cell 2 and UE power class, without $\Delta MB_{P,n}$ adjustment.

A.7.7.1.2.3 Test Requirements

The SS-RSRP measurement accuracy for Cell 1 and Cell 2 shall fulfil the absolute requirements in clause 10.1.5.1.1 and the relative requirements in clause 10.1.5.1.2.

Test 1:

Absolute accuracy of Cell 1 and absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in Table A.7.7.1.2.3-1.

Relative accuracy of Cell 2 compared with Cell 1. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in A.7.7.1.2.3-2.

Test 2:

Absolute accuracy of Cell 1 and absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in Table A.7.7.1.2.3-1.

Relative accuracy of Cell 2 compared with Cell 1. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in A.7.7.1.2.3-2.

Table A.7.7.1.2.3-1: SS-RSRP absolute accuracy test requirement

	Test requirement Notes1,2,3,4
Cell 1	$SSB_RP1 - \delta + G_{min} + X \le$ Reported RSRP(dBm) $\le SSB_RP1 + \delta + G_{max}$
Cell 2	$SSB_RP2 - \delta + G_{min} \le$ Reported RSRP(dBm) $\le SSB_RP2 + \delta + G_{max}$
Note 1:	SSB_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration
Note 2:	δ is the RSRP absolute accuracy requirement from Table 10.1.5.1.1-1, selected according to the Io used in the test
Note 3:	G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class
Note 4:	X is the Spherical coverage gain difference in dB, derived as (UE Refsens - UE Spherical coverage) from TS 38.101-2 [19] clauses 7.3.2 and 7.3.4, selected according to the UE power class and operating band. X is always a negative value.

Table A.7.7.1.2.3-2: SS-RSRP relative accuracy test requirement

	Test requirement Notes1,2,3,4, 5, 6, 7
Cell 2 – Cell 1	SSB_RP2 - SSB_RP1 -δ - D - G_{inter} ≤ Reported RSRP(dB) ≤ SSB_RP2 - SSB_RP1 +δ + G_{inter} –(X) + E

Note 1: SSB_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration
Note 2: δ is the RSRP relative accuracy requirement from Table 10.1.5.1.2-1
Note 3: Void
Note 4: X is the Spherical coverage gain difference in dB, derived as (UE Refsens - UE Spherical coverage) from TS 38.101-2 [19] clauses 7.3.2 and 7.3.4, selected according to the UE power class and operating band. X is always a negative value.
Note 5: D is the margin due to mis-alignment between fine beam and rough beam. D is the Rough Beam gain reduction in Rx beam peak direction from Table B.2.1.5.3-1, selected according to the UE power class. D is always a positive value.
Note 6: G_{inter} is the margin due to different antenna gain caused by frequency separation. G_{inter} is from Table B.2.1.5.2-1, selected according to the UE power class, and is always a positive value
Note 7: E = 3 (dB) is an additional margin to account for the actual gain difference between peak direction and spherical coverage using rough beams.

A.7.7.1.3 SA inter-frequency measurement accuracy with FR1 serving cell and FR2 target cell

A.7.7.1.3.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1.5.1.1 for inter-frequency measurements with the testing configurations in Table A.7.7.1.3.1-1.

Table A.7.7.1.3.1-1: Applicable NR configurations for FR2 inter-frequency SS-RSRP accuracy test

Config	Description of serving cell	Description of target cell
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	

A.7.7.1.3.2 Test parameters

In this set of test cases there are two cells in the test, PCell (Cell 1) in FR1 and Cell 2 in FR2 . The test parameters for the Cell 1 and Cell 2 are given in Table A.7.7.1.3.2-1 and Table A.7.7.1.3.2-2 below. Absolute accuracy of RSRP inter-frequency measurements are tested by using the parameters in Table A.7.7.1.3.2-1 and Table A.7.7.1.3.2-2. The inter-frequency measurements are supported by a measurement gap.

Table A.7.7.1.3.2-1: SS-RSRP inter-frequency test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN	1~3		freq1	freq2	freq1	freq2
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52	100: $N_{RB,c}$ = 66	10: $N_{RB,c}$ = 52	100: $N_{RB,c}$ = 66
	2		10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
	3		40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
Data RBs allocated	1,2		52	24	52	66
	3		106		106	

Duplex mode	1		FDD	TDD	FDD	TDD
	2		TDD		TDD	
	3		TDD		TDD	
TDD configuration	1		N/A	TDDConf. 3.1	N/A	TDDConf. 3.1
	2		TDDConf. 1.1		TDDConf. 1.1	
	3		TDDConf. 2.1		TDDConf. 2.1	
PDSCH Reference measurement channel	1		SR.1.1 FDD	-	SR.1.1 FDD	-
	2		SR.1.1 TDD		SR.1.1 TDD	
	3		SR.2.1 FDD		SR.2.1 FDD	
RMSI CORESET Reference Channel	1		CR.1.1 FDD	-	CR.1.1 FDD	-
	2		CR.1.1 TDD	-	CR.1.1 TDD	-
	3		CR.2.1 FDD	-	CR.2.1 FDD	-
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	2		CCR.1.1 TDD	-	CCR.1.1 TDD	-
	3		CCR.2.1 TDD	-	CCR.2.1 TDD	-
SSB configuration	1		SSB.1 FR1	SSB.3 FR2	SSB.1 FR1	SSB.3 FR2
	2		SSB.1 FR1		SSB.1 FR1	
	3		SSB.2 FR1		SSB.2 FR1	
OCNG Patterns	1~3		OP.1	OP.3	OP.1	OP.1
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration	1~3		DLBWP.1.3 ULBWP.1.3		DLBWP.1.3 ULBWP.1.3	
TRS Configuration	1~3		TRS.2.1 TDD		TRS.2.1 TDD	
PDCCH/PDSCH TCI Configuration	1~3		TCI.State.2		TCI.State.2	
SMTC configuration	1~3		SMTC.1		SMTC.1	
Time offset between Cell 2 and Cell 1	1~3	µs	3		3	
EPRE ratio of PSS to SSS	1~3	dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS Note 1						
EPRE ratio of OCNG to OCNG DMRS Note 1						
Propagation condition	1~3	-	NA	AWGN	NA	AWGN

			Link only, see clause A.3.7A		Link only, see clause A.3.7A	
Antenna configuration	1~3	-		1x2		1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Void						

Table A.7.7.1.3.2-2: SS-RSRP inter-frequency OTA related test parameters

Parameter	Config	Unit	Test 1		Test 2 NOTE 3	
			Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration according to clause A.3.15			NA	Setup 2b	NA	Setup 2b
Assumption for UE beams Note 4			N/A	Rough	N/A	Rough
N_{oc}	1~3	dBm/15 kHz	Link only, see clause A.3.7A	-90	Link only, see clause A.3.7A	NA
N_{oc}	1~3	dBm/SSB SCS				NA
$\hat{E}_s/N_{oc}$	1~3	dB		5		NA
E_s	1~3	dBm/SCS				(Table B.2.3-2 Spherical coverage +1dB)
SSB_RP Note1	1~3	dBm/SCS		-76.0		(Table B.2.3-2 Spherical coverage +1dB)
$\hat{E}_s/I_{otBB}$ Note6	1~3	dB		4.35		-3.81
Io Note1	1~3	dBm/ 95.04MHz		-50.18		SSB_RP +28.98
Note 1: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 2: Void Note 3: No additional noise is added by the test system in Test 2. Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation Note 5: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 6: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.						

A.7.7.1.3.3 Test Requirements

The SS-RSRP measurement accuracy for Cell 2 shall fulfil the Absolute requirement in clause 10.1.5.1.1.

Test 1:

Absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in Table A.7.7.1.3.3.

Test 2:

Absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in Table A.7.7.1.3.3.

Table A.7.7.1.3.3: SS-RSRP absolute accuracy test requirement

	Test requirement Notes1,2,3,4
Cell 2	SSB_RP1 -δ +G_{min} +X ≤ Reported RSRP(dBm) ≤ SSB_RP1 +δ +G_{max}
Note 1:	SSB_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration
Note 2:	δ is the RSRP absolute accuracy requirement from Table 10.1.5.1.1-1, selected according to the Io used in the test
Note 3:	G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class
Note 4:	X is the Spherical coverage gain difference in dB, derived as (UE Refsens - UE Spherical coverage) from TS 38.101-2 [19] clauses 7.3.2 and 7.3.4, selected according to the UE power class and operating band. X is always a negative value.

A.7.7.2 SS-RSRQ

A.7.7.2.1 SA intra-frequency measurement accuracy with FR2 serving cell and FR2 target cell

A.7.7.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.8.1.1.

A.7.7.2.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configurations are shown in Table A.7.7.2.1.2-1. . The absolute accuracy of SS-RSRQ intra-frequency measurement is test by using the parameters in Table A.7.7.2.1.2-2 and Table A.7.7.2.1.2-3. In all test cases, Cell 1 is the PCell and Cell 2 the target cell.

Table A.7.7.2.1.2-1: SS-RSRQ Intra frequency SS-RSRQ supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.7.2.1.2-2: SS-RSRQ Intra frequency test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			Freq1		Freq1	
Duplex mode			TDD		TDD	
TDD configuration			TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$		MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated			66		66	
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
TRS configuration			TRS.2.1 TDD		TRS.2.1 TDD	
TCI state			TCI.State.0		TCI.State.0	

PDSCH Reference measurement channel		SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	
Control channel RMC		CCR.3.1 TDD	-	CCR.3.1 TDD	-
OCNG Patterns		OP.1	OP.1	OP.1	OP.1
SMTC configuration		SMTC.1			
SSB configuration		SSB.1 FR2	SSB.1 FR2	SSB.1 FR2	SSB.1 FR2
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
SS-RSSI-Measurement		Not Applicable			
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
Propagation condition		AWGN		AWGN	
Antenna configuration		1x2	1x2	1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: Void
Note 4: Void
Note 5: Void.

Table A.7.7.2.1.2-3: SS-RSRQ Intra frequency OTA related test parameters

	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1		Setup 1according to clause A.3.15.1	
Assumption for UE beams Note 9		Rough			
N_{OC} Note1	dBm/15kHz Note 4	-95		-95	
N_{OC} Note1	dBm/SCS Note3	-86		-86	
$\hat{E}_s / N_{oc}$	dB	3		3	
SSB_RP Note2	dBm/SCS Note4	-83	-83	-89	-89
SS-RSRQ Note2	dB	-14.77	-14.77	-16.81	-16.81
$\hat{E}_s / I_{ot}$	dB	-1.76	-1.76	-4.76	-4.76
Io Note2	dBm/95.04 MHz Note4	-50		-54	

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SS-RSRQ, SSB_RP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: SS-RSRQ and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6: Void
Note 7: Void

Note 8: Void
Note 9: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.7.2.1.3 Test Requirements

The SS-RSRQ absolute measurement accuracy in test 1shall be within the range Nominal SS-RSRQ+2.5dB to Nominal SS-RSRQ-2.5dB and the SS-RSRQ measurement accuracy in test 2 shall be within the range Nominal RSRQ+3.5dB to Nominal RSRQ-3.5dB according to the requirements in clause 10.1.8.1.1.Nominal RSRQ is the value shown in table A.7.7.2.1.2-3.

A.7.7.2.2 SA Inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell

A.7.7.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.9.1.1 and 10.1.9.1.2 for inter-frequency measurement.

A.7.7.2.2.2 Test Parameters

In this test case the two cells (i.e., Cell 1 and Cell 2) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.7.7.2.2.2-1. Both absolute accuracy and relative accuracy requirements of SS-RSRQ inter-frequency measurement are tested by using test parameters in Table A.7.7.2.2.2-2 and Table A.7.7.2.2.2-3.. In all test cases, Cell 1 is the PCell and Cell 2 is target cell.

Table A. 7.7.2.2.2-1: SS-RSRQ Inter frequency SS-RSRQ supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.7.2.2.2-2: SS-RSRQ Inter frequency general test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			Freq1	freq2	freq1	Freq2
SSB Configuration			SSB.1 FR2	SSB.1 FR2	SSB.1 FR2	SSB.1 FR2
Duplex mode			TDD		TDD	
TDD configuration			TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$		MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
TRS configuration			TRS.2.1 TDD	-	TRS.2.1 TDD	-
TCI state			TCI.State.0	-	TCI.State.0	-
Data RBs allocated			66		66	
PDSCH Reference measurement channel			SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel			CR.3.1 TDD	-	CR.3.1 TDD	-
OCNG Patterns			OP.1	OP.1	OP.1	OP.1

SMTC configuration		SMTC.1 FR2	SMTC.1 FR2	SMTC.1 FR2	SMTC.1 FR2
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
Propagation conditions		AWGN	AWGN	AWGN	AWGN
Antenna configuration		1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Void Note 3: Void Note 4: Void					

Table A.7.7.2.2.2-3: SS-RSRQ Inter frequency OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
AoA setup		Setup 1 in clause A.3.15.		Setup 1 in clause A.3.15.	
Assumption for UE beams Note 8		Rough		Rough	
N_{oc} Note1	dBm/15kHz Note4	-94.03	-94.03	-94.03	-94.03
N_{oc} Note1	dBm/SCS Note3	-85.0	-85.0	-85.0	-85.0
$\hat{E}_s / N_{oc}$	dB	-1.75		-1.75	
SSB_RP Note2	dBm/SCS Note4	-86.75	-86.75	-88	-88
SS-RSRQ Note2	dB	-14.75	-14.75	-15.56	-15.56
$\hat{E}_s / I_{ot}$	dB	-1.75	-1.75	-3	-3
Io Note2	dBm/95.04 MHz Note4	-53.8	-53.8	-54.25	-54.25
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: SS-RSRQ, SSB_RP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: SS-RSRQ and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone Note 6: Void Note 7: Void Note 8: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation					

A.7.7.2.2.3 Test Requirements

The SS-RSRQ absolute measurement accuracy in test 1 shall be within the range Nominal SS-RSRQ+2.5dB to Nominal SS-RSRQ -2.5dB and the SS-RSRQ measurement accuracy in test 2 shall be within the range Nominal SS-RSRQ +3.5dB to Nominal SS-RSRQ -3.5dB according to the requirements in clause 10.1.10.1.1.

The SS-RSRQ relative measurement accuracy shall fulfil the requirements in clause 10.1.10.1.2.

A.7.7.3 SS-SINR

A.7.7.3.1 SA intra-frequency case measurement accuracy with FR2 serving cell and FR2 target cell

A.7.7.3.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.13.1.1.

A.7.7.3.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configurations are shown in Table A.7.7.3.1.2-1. . The absolute accuracy of SS-SINR intra-frequency measurement is test by using the parameters in Table A.7.7.3.1.2-2 and Table A.7.7.3.1.2-3. In all test cases, Cell 1 is the PCell and Cell 2 the target cell. The TCI status for Cell 1 is defined in Table A.3.16.2-1 and TRS configuration for Cell 1 is defined in Table A.3.17.2.1-1.

Table A.7.7.3.1.2-1: SS-SINR Intra frequency SS-SINR supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.7.3.1.2-2: SS-SINR Intra frequency test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN		Freq2		Freq2	
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		66		66	
Downlink initial BWP configuration		DLBWP.0.1			
Downlink dedicated BWP configuration		DLBWP.1.1			
Uplink initial BWP configuration		ULBWP.0.1			
Uplink dedicated BWP configuration		ULBWP.1.1			
DRX cycle configuration	ms	Not applicable			
TRS configuration		TRS.2.1 TDD			
TCI state		TCI.State.0			
PDSCH Reference measurement channel		SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	
Dedicated RMSI CORESET Reference Channel		CCR.3 .1 TDD	-	CCR.3. 1 TDD	-
OCNG Patterns		OP.1	OP.1	OP.1	OP.1
SMTC configuration		SMTC.1			
SSB configuration		SSB.1 FR2	SSB.1 FR2	SSB.1 FR2	SSB.1 FR2
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
SS-RSSI-Measurement		Not Applicable			
EPRE ratio of PSS to SSS	dB	0	0	0	0

EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
Propagation conditions		AWGN			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: Void					
Note 3: Void					
Note 4: Void					

Table A.7.7.3.1.2-3: SS-SINR Intra frequency OTA related test parameters

Parameter	Unit	Test 1		Test 3	
		Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1		Setup 1 according to clause A.3.15.1	
Assumption for UE beams Note 9		Rough		Rough	
N_{oc} Note1	dBm/15kHz Note4	-105		-105	
N_{oc} Note1	dBm/SCS Note3	-96		-96	
$\hat{E}_s / N_{oc}$	dB	4.54		2.66	
SSB_RP Note2	dBm/SCS Note4	-91.46	-93.34	-99	-99
SS-SINR Note2	dB	0	-3.2	-4.76	-4.76
$\hat{E}_s / I_{ot}$	dB	0	-3.2	-4.76	-4.76
Io Note2	dBm/95.04 MHz Note4	-59.2		-64	
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 2: SS-SINR, SSB_RP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 3: SS-SINR and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone					
Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone					
Note 6: Void					
Note 7: Void					
Note 8: Void					
Note 9: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation					

A.7.7.3.1.3 Test Requirements

The SS-SINR absolute measurement accuracy in test 1 shall be within the range Nominal SS-SINR+3B to Nominal SS-SINR -3dB and the SS-SINR measurement accuracy in test 2 shall be within the range Nominal SS-SINR +3.5dB to Nominal SS-SINR -3.5dB according to the requirements in clause 10.1.10.13.1.

A.7.7.3.2 SA Inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell

A.7.7.3.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.15.1.1 and 10.1.15.1.2 for inter-frequency measurement.

A.7.7.3.2.2 Test Parameters

In this test case the two cells (i.e., Cell 1 and Cell 2) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.7.7.3.2.2-1. Both absolute accuracy and relative accuracy requirements of SS-SINR inter-frequency measurement are tested by using test parameters in Table A.7.7.3.2.2-2 and Table A.7.7.3.2.2-3. In all test cases, Cell 1 is the PCell and Cell 2 is target cell. The TCI status for Cell 1 is defined in Table A.3.16.2-1 and TRS configuration for Cell 1 is defined in Table A.3.17.2.1-1.

Table A.7.7.3.2.2-1: SS-SINR Inter frequency SS-SINR supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.7.3.2.2-2: SS-SINR Inter frequency general test parameters

Parameter	Unit	Test 1		Test 2		Test 3	
		Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN		freq1	freq2	freq1	freq2	freq1	freq2
Duplex mode		TDD		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		66		66		66	
Downlink initial BWP configuration		DLBWP.0.1					
Downlink dedicated BWP configuration		DLBWP.1.1					
Uplink initial BWP configuration		ULBWP.0.1					
Uplink dedicated BWP configuration		ULBWP.1.1					
DRX cycle configuration	ms	Not applicable					
TRS configuration		TRS.2.1 TDD					
TCI state		TCI.State.0					
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-	CR.3.1 TDD	-
OCNG Patterns		OP.1	OP.1	OP.1	OP.1	OP.1	OP.1
SMTC configuration		SMTC. 1 FR2	SMTC. 1 FR2	SMTC. 1 FR2	SMTC. 1 FR2	SMTC. 1 FR2	SMTC. 1 FR2
SSB configuration		SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS							
EPRE ratio of PBCH to PBCH_DMRS							
EPRE ratio of PDCCH_DMRS to SSS							
EPRE ratio of PDCCH to PDCCH_DMRS							
EPRE ratio of PDSCH_DMRS to SSS							
EPRE ratio of PDSCH to PDSCH_DMRS							
EPRE ratio of OCNG DMRS to SSS Note 1							
EPRE ratio of OCNG to OCNG DMRS Note 1							
Propagation conditions		AWGN	AWGN	AWGN	AWGN	AWGN	AWGN
Antenna configuration		1x2	1x2	1x2	1x2	1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: Void
Note 4: Void

Table A.7.7.3.2.2-3: SS-SINR Inter frequency OTA related test parameters

Parameter	Unit	Test 1		Test 2		Test 3	
		Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration	degrees	Setup 1 according to A.3.15.1		Setup 1 according to A.3.15.1		Setup 1 according to A.3.15.1	
Assumption for UE beams Note 10		Rough		Rough		Rough	
N_{oc} Note1	dBm/15kHz Note4	-105	-105	-105	-105	-105	-105
N_{oc} Note1	dBm/SCS Note3	-96	-96	-96	-96	-96	-96
$\hat{E}_s / N_{oc}$	dB	-0.5		-0.5		11.0	
SSB_RP Note2	dBm/SCS Note4	-96.5	-96.5	-85	-85	-99	-99
SS-SINR Note2	dB	-0.5	-0.5	11	11	-3.0	-3.0
$\hat{E}_s / I_{ot}$	dB	-0.5	-0.5	11	11	-3.0	-3.0
Io Note2	dBm/95.04 MHz Note4	-69.3	-69.3	-55.4	-55.4	-65.24	-65.24

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SS-SINR, SSB_RP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: SS-SINR and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 6: Void
Note 7: Void
Note 8: Void
Note 9: Void
Note 10: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.7.3.2.3 Test Requirements

The SS-SINR absolute measurement accuracy in test 1 shall be within the range Nominal SS-SINR +3dB to Nominal SS-SINR -3dB and the SS-SINR measurement accuracy in test 2 shall be within the range Nominal SS-SINR +3.5dB to Nominal SS-SINR -3.5dB according to the requirements in clause 10.1.15.1.1.

The SS-SINR relative measurement accuracy shall fulfil the requirements in clause 10.1.15.1.2.

A.7.7.4 L1-RSRP measurement for beam reporting

A.7.7.4.1 SSB based L1-RSRP measurement

A.7.7.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 9.5.2 and clause 10.1.20.1 for L1-RSRP measurements based on SSB with the testing configurations for NR cells in Table A.7.7.4.1.1-1.

The AoA setup for this test is Setup 1 as defined in clause A.3.15.

Table A.7.7.4.1.1-1: Applicable NR configurations for FR2 SSB based L1-RSRP test

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.7.7.4.1.2 Test parameters

In this set of test cases there are two cells in the test, PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.7.7.4.1.2-1 and Table A.7.7.4.1.2-2 below. The absolute and relative accuracy of L1-RSRP measurements are tested by using the parameters in Table A.7.7.4.1.2-1 and Table A.7.7.4.1.2-2.

Here is no measurement gap configured in the test. Before the test, UE is configured one SSB resource set with two SSB resources. UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSB resources 0 and 1.

Table A.7.7.4.1.2-1: FR2 SSB based L1-RSRP general test parameters

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1~2		freq1	freq1
Duplex mode	1~2		TDD	TDD
TDD Configuration	1~2		TDDConf.3.1	TDDConf.3.1
$BW_{channel}$	1~2	MHz	100: $N_{RB,c}$ = 66	100: $N_{RB,c}$ = 66
Data RBs allocated	1~2		66	66
PDSCH Reference measurement channel	1		SR.3.2 TDD	SR.3.2 TDD
	2		SR.3.3 TDD	SR.3.3 TDD
RMSI CORESET Reference Channel	1		CR.3.1 TDD	CR.3.1 TDD
	2		CR.3.2 TDD	CR.3.2 TDD
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD	CCR.3.1 TDD
	2		CCR.3.7 TDD	CCR.3.7 TDD
SSB configuration	1		SSB.1 FR2	SSB.1 FR2
	2		SSB.2 FR2	SSB.2 FR2
OCNG Patterns	1~2		OP.1	OP.1
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~2		DLBWP.1.3 ULBWP.1.3	DLBWP.1.3 ULBWP.1.3
TRS Configuration	1~2		TRS.2.1 TDD	TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~2		TCI.State.2	TCI.State.2
SMTC configuration	1~2		SMTC.1	SMTC.1
reportConfigType	1~2		periodic	periodic
reportQuantity	1~2		ssb-Index-RSRP	ssb-Index-RSRP
Number of reported RS	1~2		2	2
L1-RSRP reporting period	1~2		slot320	slot320

Propagation condition	1~2		AWGN	AWGN
Antenna configuration	1~2		1x2	1x2
EPRE ratio of PSS to SSS	1~2	dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				

Table A.7.7.4.1.2-2: FR2 SSB based L1-RSRP OTA related test parameters

Parameter	Config	Unit	Test 1		Test 2 NOTE 3	
			SSB0	SSB1	SSB0	SSB1
Angle of arrival configuration			Setup 1 according to A.3.15.1		Setup 1 according to A.3.15.1	
Assumption for UE beams Note 4			Rough		Rough	
N_{oc}	1~2	dBm/15 kHz	-100		n.a.	
N_{oc}	1	dBm/SSB SCS	-91		n.a.	
	2		-88		n.a.	
$\hat{E}_s/I_{ot}$	1~2	dB	10	-2	n.a.	
SSB_RP Note1	1	dBm/SCS	-81	-93	As in Table B.2.4-2	
	2		-78	-90	As in Table B.2.4-2	
Io Note1	1~2	dBm/95.04MHz	-51.57		SSB_RP+28.98	
$\hat{E}_s/N_{oc}$	1~2	dB	10	-2	n.a.	
Note 1: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 2: Void Note 3: No additional noise is added by the test system in Test 2. Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						

A.7.7.4.1.3 Test Requirements

After 320ms from the beginning of the test, , the L1-RSRP measurement accuracy for SSB#0 and SSB#1 of Cell 2 shall fulfil the requirements in clauses 10.1.20.1. The following requirements are to be verified:

For Test 1:

Absolute accuracy of SSB0. The UE is deemed to meet the requirement if the reported L1-RSRP is in the range shown in Table A.7.7.4.1.3-1.

Relative accuracy of SSB0 compared with SSB1. The UE is deemed to meet the requirement if the difference in reported L1-RSRP meets the requirements in Table 10.1.20.1.2-1.

For Test 2:

Absolute accuracy of SSB resource reported by UE in L1-RSRP report (SSB0 or SSB1). The UE is deemed to meet the requirement if the reported L1-RSRP is in the range shown in Table A.7.7.4.1.3-1.

Relative accuracy of SSB0 compared with SSB1. The UE is deemed to meet the requirement if the difference in reported L1-RSRP meets the requirements in Table 10.1.20.1.2-1.

Table A.7.7.4.1.3-1: L1-RSRP absolute accuracy test requirement

	Test requirement Notes1,2,3
SSB0	SSB_RP0 -δ + G_{min} ≤ Reported RSRP(dBm) ≤ SSB_RP0 +δ + G_{max}
SSB1	SSB_RP1 -δ + G_{min} ≤ Reported RSRP(dBm) ≤ SSB_RP1 +δ + G_{max}
Note 1:	SSB_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the SSB n under consideration
Note 2:	δ is the RSRP absolute accuracy requirement from Table 10.1.20.1.1-1, selected according to the Io used in the test
Note 3:	G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class

A.7.7.4.2 CSI-RS based L1-RSRP measurement on resource set with repetition off

A.7.7.4.2.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 9.5.3 and clause 10.1.20.2 for L1-RSRP measurements based on CSI-RS with the testing configurations for NR cells in Table A.7.7.4.2.1-1.

The AoA setup for this test is Setup 1 as defined in clause A.3.15.

Table A.7.7.4.2.1-1: Applicable NR configurations for FR1 CSI-RS based L1-RSRP test

Config	Description
1	NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode

A.7.7.4.2.2 Test parameters

In this set of test cases there are one cell in the test, PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.7.7.4.2.2-1 and Table A.7.7.4.2.2-2 below. The absolute and relative accuracy of L1-RSRP measurements are tested by using the parameters in Table A.7.7.4.2.2-1 and Table A.7.7.4.2.2-2.

There is no measurement gap configured in the test. Before the test, UE is configured one CSI-RS resource set with two CSI-RS resources. UE is configured to perform RLM and BFD based on SSB 0 and 1. CSI-RS is not transmitted in the same OFDM symbols as SSB.

Table A.7.7.4.2.2-1: FR2 CSI-RS based L1-RSRP general test parameters

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1		freq1	freq1
Duplex mode	1		TDD	TDD

TDD Configuration	1		TDDConf.3.1	TDDConf.3.1
$BW_{channel}$	1	MHz	100: $N_{RB,c}$ = 66	100: $N_{RB,c}$ = 66
PDSCH Reference measurement channel	1		SR.3.1 TDD	SR.3.1 TDD
RMSI CORESET Reference Channel	1		CR.3.1 TDD	CR.3.1 TDD
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD	CCR.3.1 TDD
SSB configuration	1		SSB.1 FR2	SSB.1 FR2
OCNG Patterns	1		OP.1	OP.1
Initial BWP Configuration	1		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
TRS Configuration	1		TRS.2.1 TDD	TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1		TCI.State.2	TCI.State.2
SMTC configuration	1		SMTC.1	SMTC.1
CSI-RS	1		CSI-RS.3.2 TDD	CSI-RS.3.2 TDD
reportConfigType	1		periodic	periodic
reportQuantity	1		cri-RSRP	cri-RSRP
Number of reported RS	1		2	2
L1-RSRP reporting period	1		slot80	slot80
Propagation condition	1		AWGN	AWGN
Antenna configuration	1		1x2	1x2
EPRE ratio of PSS to SSS	1	dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Table A.7.7.4.2.2-2: FR2 CSI-RS based L1-RSRP OTA related test parameters

Parameter	Config	Unit	Test 1		Test 2 NOTE 3	
			CSI-RS0	CSI-RS1	CSI-RS0	CSI-RS1
Angle of arrival configuration			Setup 1 according to A.3.15.1		Setup 1 according to A.3.15.1	
Assumption for UE beams Note 4			Rough		Rough	
N_{oc}	1~2	dBm/15 kHz	-100		n.a.	

N_{oc}	1~2	dBm/SSB SCS	-91		n.a. n.a.
$\hat{E}_s / I_{ot}$	1~2	dB	10	-2	n.a.
CSI-RS-RSRP[Note1]	1~2	dBm/SCS	-81	-93	As in Table B.2.4-2
Io[Note1]	1~2	dBm/95.04MHz	-59.86		SS-RSRP+28.98
$\hat{E}_s / N_{oc}$	1~2	dB	-51.57	-2	n.a.
Note 1: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 2: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 3: No additional noise is added by the test system in Test 2. Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation					

A.7.7.4.2.3 Test Requirements

After 640ms from the beginning of the test, the L1-RSRP measurement accuracy for CSI-RS#0 and CSI-RS#1 of Cell 1 shall fulfil the requirements in clause 10.1.20.2. The following requirements are to be verified:

For Test 1:

Absolute accuracy of CSI-RS0. The UE is deemed to meet the requirement if the reported L1-RSRP is in the range shown in Table A.7.7.4.2.3-1.

Relative accuracy of CSI-RS0 compared with CSI-RS1. The UE is deemed to meet the requirement if the difference in reported L1-RSRP meets the requirements in Table 10.1.20.2.2-1.

For Test 2:

Absolute accuracy of CSI-RS resource reported by UE in L1-RSRP report (CSI-RS0 or CSI-RS1). The UE is deemed to meet the requirement if the reported L1-RSRP is in the range shown in Table A.7.7.4.2.3-1.

Relative accuracy of CSI-RS0 compared with CSI-RS1. The UE is deemed to meet the requirement if the difference in reported L1-RSRP meets the requirements in Table 10.1.20.2.2-1.

Table A.7.7.4.2.3-1: L1-RSRP absolute accuracy test requirement

	Test requirement [Notes1,2,3]
CSI-RS0	CSI-RS _RP0 -δ + G_{min} ≤ Reported RSRP(dBm) ≤CSI-RS _RP0 +δ + G_{max}
CSI-RS1	CSI-RS _RP1 -δ + G_{min} ≤ Reported RSRP(dBm) ≤CSI-RS _RP1 +δ + G_{max}
Note 1: CSI-RS_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the CSI-RS n under consideration Note 2: δ is the RSRP absolute accuracy requirement from Table 10.1.20.2.1-1, selected according to the Io used in the test Note 3: G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class	

A.7.7.5 CLI measurements

A.7.7.5.1 SA SRS-RSRP measurement accuracy with FR2 serving cell

A.7.7.5.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SRS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 10.1.22.1.1 with the testing configurations for NR cells in Table A.7.7.5.1.1-1.

Table A.7.7.5.1.1-1: Applicable NR configurations for FR2 SRS-RSRP accuracy test

Config	Description
1	120 kHz SRS SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.7.7.5.1.2 Test parameters

In this set of test cases there is one cell in the test, FR2 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.7.7.5.1.2-1 and A.7.7.5.1.2-2 below. The test parameter for the (virtual) neighbor cell UE transmitting SRS are given in Table A.7.7.5.1.2-2.

Before the test UE is configured to perform SRS-RSRP measurement. During the test, the test system transmits SRS resources for measurement in the DL slots according to the SRS configuration in Table A.7.7.5.1.2-3. There is no measurement gap configured in the test. During the test, the test system does not transmit PDCCH/PDSCH/OCNG on SRS symbol to be transmitted and on 2 data symbols before SRS to be transmitted.

Table A.7.7.5.1.2-1: FR2 test parameters for SRS-RSRP accuracy

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1		freq1	freq1
Duplex mode	1		TDD	TDD
TDD configuration	1		TDDConf.3.1	TDDConf.3.1
$BW_{channel}$	1	MHz	100: $N_{RB,c}$ = 66	100: $N_{RB,c}$ = 66
PDSCH Reference measurement channel	1		SR.3.1 TDD	SR.3.1 TDD
RMSI CORESET Reference Channel	1		CR.3.1 TDD	CR.3.1 TDD
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD	CCR.3.1 TDD
SSB configuration	1		SSB.3 FR2	SSB.3 FR2
OCNG Patterns	1		OP.1	OP.1
TRS configuration	1		TRS.2.1 TDD	TRS.2.1 TDD
Initial BWP Configuration	1		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1		DLBWP.1.3 ULBWP.1.3	DLBWP.1.3 ULBWP.1.3
SMTC configuration	1		SMTC.1	SMTC.1
Time offset between DL from serving cell and SRS from test system	1	µs	10.76	10.67
EPRE ratio of PSS to SSS	1	dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				

EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
Propagation condition	1		AWGN	AWGN
Antenna configuration	1		1x2	1x2
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.				

Table A.7.7.5.1.2-2: SRS-RSRP accuracy OTA related test parameters for PCell and Neighbour cell UE in FR2

Parameter	Unit	T1	T2
Angle of arrival configuration		Setup 1 defined A.3.15.1	Setup 1 defined A.3.15.1
Beam assumption Note 5		Fine	Fine
N_{oc} Note1	dBm/15kHz Note3	-100	N/A
N_{oc} Note1	dBm/SCS Note3	-91	N/A
$\hat{E}_s / N_{oc}$	dB	2	N/A
E_S	dBm/SCS Note3		(Table B.2.7-2 Rx Beam Peak)
SRS_RP Note2	dBm/SCS	-89	(Table B.2.7-2 Rx Beam Peak)
$\hat{E}_s / I_{ot\ BB}$ Note4	dB	>1	1
Io Note2	dBm/95.04 MHz Note3	-57.89	(Table B.2.7-2 Rx Beam Peak +50.79dB)
Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 2: SRS_RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 3: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone			
Note 4: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 2dB for UE multi-band relaxation factor $\sum MB_P$ from TS 38.101-2 [19] Table 6.2.1.3-4.			
Note 5: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.			

Table A.7.7.5.1.2-3: SRS configuration parameters for FR2 SRS-RSRP accuracy

	Field	SRSConf.1
SRS-ResourceSet	srs-ResourceSetId	0
	srs-ResourceIdList	0
	resourceType	Periodic

	Usage	Codebook
SRS-Resource	SRS-ResourceId	0
	nrofSRS-Ports	Port1
	transmissionComb	n2
	combOffset-n2	0
	cyclicShift-n2	0
	resourceMapping startPosition	0
	resourceMapping nrofSymbols	n1
	resourceMapping repetitionFactor	n1
	freqDomainPosition	0
	freqDomainShift	0
	freqHopping c-SRS	12
	freqHopping b-SRS	0
	freqHopping b-hop	0
	groupOrSequenceHopping	Neither
	resourceType	Periodic
	periodicityAndOffset-p	sl160,25
	sequenceId	0

A.7.7.5.1.3 Test Requirements

The SRS-RSRP measurement accuracy shall fulfil the absolute accuracy requirements in clauses 10.1.22.1.1. The following requirements are to be verified:

During T1:

The UE is deemed to meet the requirement if the reported SRS-RSRP is in the range shown in table A.7.7.5.1.3-1.

During T2:

The UE is deemed to meet the requirement if the reported SRS-RSRP is in the range shown in table A.7.7.5.1.3-1.

Table A.7.7.5.1.3-1: SRS-RSRP absolute accuracy test requirement

	Test requirement Notes1,2,3
SRS	SRS_RP -δ +G_{min} ≤ Reported SRS-RSRP(dBm) ≤SRS_RP +δ +G_{max}
Note 1:	SRS_RP is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test
Note 2:	δ is the RSRP absolute accuracy requirement from Table 10.1.22.1.1-2, selected according to the Io used in the test
Note 3:	G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class

A.7.7.5.2 SA CLI-RSSI measurement accuracy with FR2 serving cell

A.7.7.5.2.1 Test Purpose and Environment

The purpose of this test is to verify that the CLI-RSSI measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 10.1.22.2.1 with the testing configurations for NR cells in Table A.7.7.5.2.1-1.

Table A.7.7.5.2.1-1: Applicable NR configurations for FR2 CLI-RSSI accuracy test

Config	Description
1	120 kHz SRS SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.7.7.5.2.2 Test parameters

In this set of test cases there is one cell in the test, FR2 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.7.7.5.2.2-1 and A.7.7.5.2.2-2 below.

Before the test UE is configured to perform CLI-RSSI measurement. There is no measurement gap configured in the test. During the test, the test system does not transmit PDCCH/PDSCH/OCNG on symbols for CLI-RSSI resource and on 2 data symbol before. The CLI-RSSI measurement resource configuration is in Table A.7.7.5.2.2-3.

Table A.7.7.5.2.2-1: FR2 test parameters for CLI-RSSI accuracy

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1		freq1	freq1
Duplex mode	1		TDD	TDD
TDD configuration	1		TDDConf.3.1	TDDConf.3.1
$BW_{channel}$	1	MHz	100: $N_{RB,c}$ = 66	100: $N_{RB,c}$ = 66
PDSCH Reference measurement channel	1		SR.3.1 TDD	SR.3.1 TDD
RMSI CORESET Reference Channel	1		CR.3.1 TDD	CR.3.1 TDD
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD	CCR.3.1 TDD
SSB configuration	1		SSB.3 FR2	SSB.3 FR2
OCNG Patterns Note2	1		OP.1	OP.1
TRS configuration	1		TRS.2.1 TDD	TRS.2.1 TDD
Initial BWP Configuration	1		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1		DLBWP.1.3 ULBWP.1.3	DLBWP.1.3 ULBWP.1.3
SMTC configuration	1		SMTC.1	SMTC.1
Time offset between DL from serving cell and OCNG from test system	1	µs	10.67	10.67
EPRE ratio of PSS to SSS	1	dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
Propagation condition	1		AWGN	AWGN
Antenna configuration	1		1x2	1x2

Note 1:	OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	OCNG is not transmitted in the CLI-RSSI measurement resources.

Table A.7.7.5.2.2-2: CLI-RSSI accuracy OTA related test parameters

Parameter	Unit	T1	T2
Angle of arrival configuration		Setup 1 defined A.3.15.1	
Beam assumption Note 5		Fine	
N_{oc} on CLI-RSSI measurement resource Note1	dBm/15kHz Note3	-100	
N_{oc} on CLI-RSSI measurement resource Note1	dBm/SCS Note3	-91	
$\hat{E}_s / N_{oc}$ on CLI-RSSI measurement resource	dB	-Infinity	
RSRP on CLI-RSSI measurement resource Note2	dBm/SCS	-Infinity	
$\hat{E}_s / I_{ot\ BB}$ on CLI-RSSI measurement resource Note4	dB	-Infinity	
Io on CLI-RSSI measurement resource Note2	dBm/95.04 MHz Note3	-62.01	
Io on CLI-RSSI measurement resource Note2	dBm/1.08 MHz	-81.46	

Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 2: SRS_RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 3: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone

Note 4: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 2dB for UE multi-band relaxation factor $\sum MB_P$ from TS 38.101-2 [19] Table 6.2.1.3-4.

Note 5: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.

Table A.7.7.5.2.2-3: CLI-RSSI measurement resource configuration for FR2 CLI-RSSI accuracy

	Field	SRSConf.1
CLI-RSSI measurement resource	rssi-ResourceId	0
	rssi-SCS	120kHz
	startPRB	0
	nrofPRBs	66
	startPosition	3
	nrofSymbols	11
	rssi-PeriodicityAndOffset	sl160, 25

A.7.7.5.2.3 Test Requirements

The CLI-RSSI measurement accuracy shall fulfil the absolute accuracy requirements in clauses 10.1.22.2.1. The following requirements are to be verified:

During T1:

The UE is deemed to meet the requirement if the reported CLI-RSSI is in the range shown in table A.7.7.5.2.3-1.

During T2:

The UE is deemed to meet the requirement if the reported CLI-RSSI is in the range shown in table A.7.7.5.2.3-1.

Table A.7.7.5.2.3-1: CLI-RSSI absolute accuracy test requirement

	Test requirement Notes1,2,3
	Io -δ +G_{min} ≤ Reported CLI-RSSI(dBm) ≤Io +δ +G_{max}
Note 1:	Io is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for 1.08MHz
Note 2:	δ is the RSRP absolute accuracy requirement from Table 10.1.22.1.1-2, selected according to the Io used in the test
Note 3:	G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class

A.7.7.6 L1-SINR measurement for beam reporting

A.7.7.6.1 L1-SINR measurement with CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off

A.7.7.6.1.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clauses 9.8.4.1 and clause 10.1.28.1 for L1-SINR measurements based on CSI-RS with the testing configurations for NR cells in Table A.7.7.6.1.1-1.

The AoA setup for this test is Setup 1 as defined in clause A.3.15.

Table A.7.7.6.1.1-1: Applicable NR configurations for FR2 L1-SINR test with CSI-RS based CMR and no dedicated IMR configured

Config	Description
1	NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode

A.7.7.6.1.2 Test parameters

In this set of test cases there are one cell in the test, PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.7.7.6.1.2-1 and Table A.7.7.6.1.2-2 below. The absolute and relative accuracy of L1-SINR measurements are tested by using the parameters in Table A.7.7.6.1.2-1 and Table A.7.7.6.1.2-2.

There is no measurement gap configured in the test. Before the test, UE is configured one CSI-RS resource set with two CSI-RS resources. UE is configured to perform RLM and BFD based on SSB 0 and 1. CSI-RS is not transmitted in the same OFDM symbols as SSB.

Table A.7.7.6.1.2-1: FR2 CSI-RS based L1-SINR general test parameters

Parameter	Config	Unit	Test 1
SSB GSCN	1		freq1

Duplex mode	1		TDD
TDD Configuration	1		TDDConf.3.1
$BW_{channel}$	1	MHz	100: $N_{RB,c}$ = 66
PDSCH Reference measurement channel	1		SR.3.1 TDD
RMSI CORESET Reference Channel	1		CR.3.1 TDD
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD
SSB configuration	1		SSB.1 FR2
OCNG Patterns	1		OP.1
Initial BWP Configuration	1		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1		DLBWP.1.3 ULBWP.1.3
TRS Configuration	1		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1		TCI.State.2
SMTC configuration	1		SMTC.1
CSI-RS	1		CSI-RS.3.2 TDD
reportConfigType	1		periodic
reportQuantity	1		cri-SINR-r16
nrofReportedRS	1		2
L1-SINR reporting period	1		slot80
Propagation condition	1		AWGN
Antenna configuration	1		1x2
EPRE ratio of PSS to SSS	1	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Table A.7.7.6.1.2-2: FR2 CSI-RS based L1-SINR OTA related test parameters

Parameter	Config	Unit	Test 1	
			CSI-RS0	CSI-RS1

Angle of arrival configuration			Setup 1 according to A.3.15.1	
Assumption for UE beams[Note 4]			Rough	
N_{oc}	1~2	dBm/15 kHz	-100	
N_{oc}	1~2	dBm/SSB SCS	-91	
$\hat{E}_s / I_{ot}$	1~2	dB	10	-2
CSI-RS-RSRP[Note1]	1~2	dBm/SCS	-81	-93
Io[Note1]	1~2	dBm/ 95.04MHz	-51.57	-59.86
$\hat{E}_s / N_{oc}$	1~2	dB	10	-2

Note 1: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 2: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 3: Void.
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.7.6.1.3 Test Requirements

After 640ms from the beginning of the test, the L1-SINR measurement accuracy for CSI-RS#0 and CSI-RS#1 of Cell 1 shall fulfil the requirements in clauses 10.1.28.1. The following requirements are to be verified:

For Test 1:

Absolute accuracy of CSI-RS0. The UE is deemed to meet the requirement if the reported L1-SINR is in the range shown in Table A.7.7.6.1.3-1.

Relative accuracy of CSI-RS0 compared with CSI-RS1. The UE is deemed to meet the requirement if the reported differential L1-SINR is in the range shown in Table A.7.7.6.1.3-1.

Table A.7.7.6.1.3-1: L1-SINR absolute accuracy test requirement

	Test requirement [Notes1,2]
CSI-RS0	L1-SINR0-δ≤ Reported SINR(dB) ≤L1-SINR0+δ

Note 1: L1-SINR0 is the equivalent SINR received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the CSI-RS 0 under consideration
Note 2: δ is the SINR absolute accuracy requirement from Table 10.1.28.2.1-1, selected according to the Io used in the test

Table A.5.7.6.1.3-2: L1-SINR relative accuracy test requirement

	Test requirement [Notes1,2]
CSI-RS0 - CSI-RS1	L1-SINR0 - L1-SINR1 - σ≤ Reported DIFFSINR (dB) ≤ L1-SINR0 - L1-SINR1 + σ

Note 1: L1-SINRn is the equivalent SINR received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the CSI-RS n under consideration
Note 2: σ is the SINR relative requirement from Table 10.1.28.1.2-1, selected according to the Io used in the test

A.7.7.6.2 L1-SINR measurement with SSB based CMR and dedicated IMR

A.7.7.6.2.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clauses 9.8.4.2 and clause 10.1.28.2 for L1-SINR measurements with SSB based CMR and CSI-IM based IMR, with the testing configurations for NR cells in Table A.7.7.6.2.1-1.

The AoA setup for this test is Setup 1 as defined in clause A.3.15.

Table A.7.7.6.2.1-1: Applicable NR configurations for FR2 L1-SINR measurement test with SSB based CMR and CSI-IM based IMR

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE FDD, NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.7.7.6.2.2 Test parameters

In this set of test cases there are two cells in the test, PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.7.7.6.2.2-1 and Table A.7.7.6.2.2-2 below. The absolute and relative accuracy of L1-SINR measurements are tested by using the parameters in Table A.7.7.6.2.2-1 and Table A.7.7.6.2.2-2.

Here is no measurement gap configured in the test. Before the test, UE is configured one SSB resource set with two SSB resources and one CSI-IM resource set with two CSI-IM resource. UE is configured to perform RLM and BFD measurement based on the SSB resources 0 and 1. UE is configured to perform L1-SINR measurement based on the SSBs as CMR and the CSI-IM resources as IMR.

Table A.7.7.6.2.2-1: FR2 L1-SINR general test parameters with SSB based CMR and CSI-IM based IMR

Parameter	Config	Unit	Test 1
SSB GSCN	1~2		freq1
Duplex mode	1~2		TDD
TDD Configuration	1~2		TDDConf.3.1
$BW_{channel}$	1~2	MHz	100: $N_{RB,c}$ = 66
PDSCH Reference measurement channel	1~2		SR.3.1 TDD
RMSI CORESET Reference Channel	1~2		CR.3.1 TDD
Dedicated CORESET Reference Channel	1~2		CCR.3.1 TDD
SSB configuration	1		SSB.1 FR2
	2		SSB.2 FR2
CSI-IM configuration	1~2		CSI-IM 3.1 TDD
OCNG Patterns	1~2		OP.1
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~2		DLBWP.1.3 ULBWP.1.3
TRS Configuration	1~2		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~2		TCI.State.2
SMTC configuration	1~2		SMTC.1
reportConfigType	1~2		periodic
reportQuantity-r16	1~2		ssb-Index-SINR-r16
Number of reported RS	1~2		2

L1-SINR reporting period	1~2		slot640
Propagation condition	1~2		AWGN
Antenna configuration	1~2		1x2
EPRE ratio of PSS to SSS	1~2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			

Table A.7.7.6.2.2-2: FR2 L1-SINR SSB specific test parameters

Parameter	Config	Unit	Test 1	
			SSB0	SSB1
Angle of arrival configuration			Setup 1 according to A.3.15.1	
Assumption for UE beams Note 4			Rough	
N_{oc}	1~2	dBm/15kHz	-100	
N_{oc}	1	dBm/SSB SCS	-91	
	2		-88	
$\hat{E}_s / I_{ot}$	1~2	dB	10	-2
SS-RSRP Note1	1	dBm/SCS	-81	-93
	2		-78	-90
Io Note1	1~2	dBm/95.04 MHz	-51.57	-59.86
$\hat{E}_s / N_{oc}$	1~2	dB	10	-2
Note 1: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 2: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 3: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.7.7.6.2.3 Test Requirements

After 640ms from the beginning of the test, the L1-SINR measurement accuracy for SSB#0+CSI-IM#0 and SSB#1+CSI-IM#1 of Cell 1 shall fulfil the requirements in clauses 10.1.28.2. The following requirements are to be verified:

For Test 1:

Absolute accuracy of SSB#0+CSI-IM#0. The UE is deemed to meet the requirement if the reported L1-SINR is in the range shown in Table A.7.7.6.2.3-1.

Relative accuracy of SSB#0+CSI-IM#0 compared with SSB#1+CSI-IM#1. The UE is deemed to meet the requirement if the reported differential L1-SINR is in the range shown in Table A.7.7.6.2.3-2.

Table A.7.7.6.2.3-1: L1-SINR absolute accuracy test requirement

	Test requirement Notes1,2
SSB#0+CSI-IM#0	L1_SINR0 -δ ≤ Reported SINR(dB) ≤ L1_SINR0 +δ
Note 1: L1_SINR0 is the equivalent SINR received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the SSB#0+CSI-IM#0 under consideration	
Note 2: δ is the SINR absolute accuracy requirement from Table 10.1.28.2.1-2, selected according to the Io used in the test	

Table A.7.7.6.2.3-2: L1-SINR relative accuracy test requirement

	Test requirement Notes1,2
SSB#0+CSI-IM#0 - SSB#1+CSI-IM#1	L1-SINR0 - L1-SINR1 - σ≤ Reported DIFFSINR (dB) ≤ L1-SINR0 - L1-SINR1 + σ
Note 1: L1-SINRn is the equivalent SINR received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the SSB#n+CSI-IM#n under consideration	
Note 2: σ is the SINR relative requirement from Table 10.1.28.2.2-1, selected according to the Io used in the test	

A.7.7.6.3 L1-SINR measurement with CSI-RS based CMR and dedicated IMR

A.7.7.6.3.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-SINR measurement accuracy is within the specified limits. This test will partly verify the requirements in Clauses 9.8.4.3 and clause 10.1.28.3 for L1-SINR measurements based on CSI-RS as both CMR and IMR with the testing configurations for NR cell in Table A.7.7.6.3.1-1.

The AoA setup for this test is Setup 1 as defined in clause A.3.15.

Table A.7.7.6.3.1-1: Applicable NR configurations for FR2 L1-SINR measurement test with CSI-RS based both CMR based IMR

Config	Description
1	NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode

A.7.7.6.3.2 Test parameters

In this set of test cases there are one cell in the test, PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.7.7.6.3.2-1 and Table A.7.7.6.3.2-2 below. The absolute and relative accuracy of L1-SINR measurements are tested by using the parameters in Table A.7.7.6.3.2-1 and Table A.7.7.6.3.2-2.

There is no measurement gap configured in the test. Before the test, UE is configured two CSI-RS resource sets with two CSI-RS resources for each set. UE is configured to perform RLM and BFD based on SSB 0 and 1. CSI-RS is not transmitted in the same OFDM symbols as SSB. UE is configured to perform L1-SINR measurement based on the configured CSI-RS as both CMR and IMR.

Table A.7.7.6.3.2-1: FR2 L1-SINR measurement test with CSI-RS based both CMR and IMR

Parameter	Config	Unit	Test 1

SSB GSCN	1		freq1
Duplex mode	1		TDD
TDD Configuration	1		TDDConf.3.1
$BW_{channel}$	1	MHz	100: $N_{RB,c}$ = 66
PDSCH Reference measurement channel	1		SR.3.1 TDD
RMSI CORESET Reference Channel	1		CR.3.1 TDD
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD
SSB configuration	1		SSB.1 FR2
OCNG Patterns	1		OP.1
Initial BWP Configuration	1		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1		DLBWP.1.1 ULBWP.1.1
TRS Configuration	1		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1		TCI.State.2
SMTC configuration	1		SMTC.1
CSI-RS configuration as CMR	1		CSI-RS.3.2 TDD
CSI-RS configuration as IMR	1		CSI-RS.3.3A TDD
reportConfigType	1		periodic
reportQuantity-r16	1		cri-SINR-r16
nrofReportedRS	1		2
L1-RSRP reporting period	1		slot80
Propagation condition	1		AWGN
Antenna configuration	1		1x2
EPRE ratio of PSS to SSS	1	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Table A.7.7.6.3.2-2: FR2 CSI-RS based L1-SINR measurement OTA related test parameters

Parameter	Config	Unit	Test 1	
			CSI-RS0	CSI-RS1
Angle of arrival configuration			Setup 1 according to A.3.15.1	
Assumption for UE beams Note 4			Rough	

N_{oc}	1~2	dBm/15 kHz	-100	
N_{oc}	1~2	dBm/SSB SCS	-91	
$\hat{E}_s / I_{ot}$	1~2	dB	10	0
CSI-RS-RSRP[Note1]	1~2	dBm/SCS	-81	-91
Io[Note1]	1~2	dBm/ 95.04MHz	-51.57	-59.86
$\hat{E}_s / N_{oc}$	1~2	dB	10	0
Note 1: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 2: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 3: No additional noise is added by the test system in Test 2. Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.7.7.6.3.3 Test Requirements

After 640ms from the beginning of the test, the L1-SINR measurement accuracy for CSI-RS#0 for CMR +CSI-RS#0 for IMR and CSI-RS#1 for CMR +CSI-RS#0 for IMR of Cell 1 shall fulfil the requirements in clause 10.1.28.3. The following requirements are to be verified:

Absolute accuracy of CSI-RS#0 for CMR + CSI-RS#0 for IMR. The UE is deemed to meet the requirement if the reported L1-SINR is in the range shown in Table A.7.7.6.3.3-1.

Relative accuracy of CSI-RS#0 for CMR + CSI-RS#0 for IMR compared with CSI-RS#1 for CMR + CSI-RS#1 for IMR. The UE is deemed to meet the requirement if the reported differential L1-SINR is in the range shown in Table A.7.7.6.3.3-2.

Table A.7.7.6.3.3-1: L1-SINR absolute accuracy test requirement

	Test requirement [Notes1,2]
CSI-RS#0 for CMR + CSI-RS#0 for IMR	L1-SINR0 -δ≤ Reported SINR(dBm) ≤L1-SINR 0 +δ
Note 1: L1-SINRn is the equivalent SINR received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the CSI-RS#n under consideration Note 2: δ is the SINR absolute accuracy requirement from Table 10.1.28.3.1-1.	

Table A.7.7.6.3.3-2: L1-SINR relative accuracy test requirement

	Test requirement [Notes1,2]
(CSI-RS#0 for CMR + CSI-RS#0 for IMR) – (CSI-RS#1 for CMR + CSI-RS#1 for IMR)	L1-SINR0 - L1-SINR1 - σ≤ Reported DIFFSINR (dB) ≤ L1-SINR0 - L1-SINR1 + σ
Note 1: L1-SINRn is the equivalent SINR received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the (CSI-RS#n for CMR + CSI-RS#n for IMR) under consideration Note 2: σ is the SINR relative requirement from Table 10.1.28.3.2-1, selected according to the Io used in the test	

A.7.7.7 CSI-RSRP

A.7.7.7.1 SA intra-frequency case measurement accuracy with FR2 serving cell and FR2 target cell

A.7.7.7.1.1 Test Purpose and Environment

The purpose of this test is to verify that the CSI-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1.3.2.1 and 10.1.3.2.2 for intra-frequency measurements.

A.7.7.7.1.2 Test parameters

In this set of test cases all cells are on the same carrier frequency. Supported test configurations are shown in Table A.7.7.7.1.2-1. Both absolute and relative accuracy of CSI-RSRP intra-frequency measurements are tested by using the parameters in Table A.7.7.7.1.2-2 and A.7.7.7.1.2-3. In all test cases, Cell 1 is the PCell and Cell 2 the target cell. The TCI status for Cell 1 is defined in Table A.3.16.2-1 and TRS configuration for Cell 1 is defined in Table A.3.17.2.1-1. The test consists of two time phases T1 and T2.

Table A.7.7.7.1.2-1: CSI-RSRP Intra frequency CSI-RSRP supported test configurations

Configuration	Description
1	120 kHz SSB and CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.7.7.1.2-2: CSI-RSRP Intra frequency general test parameters

Parameter	Unit	T1		T2	
		Cell 1	Cell 2	Cell 1	Cell 2
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 24		100: $N_{RB,c}$ = 24	
Downlink initial BWP configuration		DLBWP.0.1	-	DLBWP.0.1	-
Downlink dedicated BWP configuration		DLBWP.1.1	-	DLBWP.1.1	-
Uplink initial BWP configuration		ULBWP.0.1	-	ULBWP.0.1	-
Uplink dedicated BWP configuration		ULBWP.1.1	-	ULBWP.1.1	-
DRX cycle configuration		Not applicable	-	Not applicable	-
TRS configuration		TRS.2.1 TDD	-	TRS.2.1 TDD	-
TCI state		TCI.State.0	-	TCI.State.0	-
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-

Control channel RMC		CCR.3.1 TDD	-	CCR.3.1 TDD	-
OCNG Patterns		OP.3	OP.3	OP.3	OP.3
SMTC configuration		SMTC.1		SMTC.1	
SSB configuration		SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
CSI-RS configuration for RRM		CSI-RS.RRM.FR2.1 TDD			
Time offset with Cell 1	μs	-	0.58	-	0.58
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
Propagation conditions		AWGN	AWGN	AWGN	AWGN
Antenna configuration		1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					

Table A.7.7.7.1.2-3: CSI-RSRP Intra frequency OTA related test parameters

Parameter	Unit	T1		T2	
		Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1			
Assumption for UE beams Note 7		Rough		Assumption for UE beams Note 7	
N_{oc} Note1	dBm/15kHz Note4	-91.6		N/A	
N_{oc} Note1	dBm/SCS Note4	-82.6		N/A	
$\hat{E}_s / N_{oc}$	dB	6.0	1.0	N/A	N/A
E_s	dBm/SCS Note4			(Table B.2.2.2-2 Rx Beam Peak +2.1dB)	(Table B.2.2.2-2 Rx Beam Peak +2.1dB)
CSI-RS_RP Note2	dBm/SCS	-76.6	-81.6	(Table B.2.2.2-2 Rx Beam Peak +2.1dB)	(Table B.2.2.2-2 Rx Beam Peak +2.1dB)

$\hat{E}_s/I_{ot}$ BB Note6	dB	2.44	-5.98	-5.98	-5.98
Io Note2	dBm/95.04 MHz Note4	-50.05		(Table B.2.2.2-2 Rx Beam Peak +29.70dB)	
Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 2: CSI-RS_RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 3: Void					
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone					
Note 5: Void					
Note 6: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.					
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation					

A.7.7.7.1.3 Test Requirements

The CSI-RSRP measurement accuracy shall fulfil the absolute accuracy requirements in clauses 10.1.3.2.1 and relative accuracy requirements in clause 10.1.3.2.2. The following requirements are to be verified:

During T1:

Absolute accuracy of Cell 1 and absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported CSI-RSRP is in the range shown in table A.7.7.7.1.3-1.

Relative accuracy of Cell 2 compared with Cell 1. The UE is deemed to meet the requirement if the difference in reported CSI-RSRP meets the requirements in Table 10.1.3.2.2-1.

During T2:

Absolute accuracy of Cell 1 and absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported CSI-RSRP is in the range shown in table A.7.7.7.1.3-1.

Relative accuracy of Cell 2 compared with Cell 1. The UE is deemed to meet the requirement if the difference in reported CSI-RSRP meets the requirements in Table 10.1.3.2.2-1.

During T1 and T2:

Relative accuracy of Cell 1 during T2 compared with Cell 1 during T1. The UE is deemed to meet the requirement if the difference in reported CSI-RSRP meets the requirements in Table 10.1.3.2.2-1

Relative accuracy of Cell 2 during T2 compared with Cell 2 during T1. The UE is deemed to meet the requirement if the difference in reported CSI-RSRP meets the requirements in Table 10.1.3.2.2-1.

Table A.7.7.7.1.3-1: CSI-RSRP absolute accuracy test requirement

	Test requirement Notes1,2,3
Cell 1	CSI-RS_RP1 -δ +G_{min} ≤ Reported RSRP(dBm) ≤ CSI-RS_RP1 +δ +G_{max}
Cell 2	CSI-RS_RP2 -δ +G_{min} ≤ Reported RSRP(dBm) ≤ CSI-RS_RP2 +δ +G_{max}
Note 1: CSI-RS_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration	

Note 2:	δ is the RSRP absolute accuracy requirement from Table 10.1.3.2.1-1, selected according to the Io used in the test
Note 3:	G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class

A.7.7.7.2 SA inter-frequency case measurement accuracy with FR2 serving cell and FR2 target cell

A.7.7.7.2.1 Test Purpose and Environment

The purpose of this test is to verify that the CSI-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1.5.2.1 and 10.1.5.2.2 for inter-frequency measurements with the testing configurations for NR cells in Table A.7.7.7.2.1-1.

Table A.7.7.7.2.1-1: Applicable NR configurations for FR2 inter-frequency CSI-RSRP accuracy test

Configuration	Description
1	120 kHz SSB and CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode

A.7.7.7.2.2 Test parameters

In this set of test cases there are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on a different frequency than the PCell. The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 1 and Cell 2 are given in Table A.7.7.7.2.2-1 and Table A.7.7.7.2.2-2 below. Both absolute and relative accuracy of RSRP inter-frequency measurements are tested by using the parameters in Table A.7.7.7.2.2-1 and Table A.7.7.7.2.2-2. The inter-frequency measurements are supported by a measurement gap.

Table A.7.7.7.2.2-1: CSI-RSRP inter-frequency test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
$BW_{channel}$			100: $N_{RB,c}$ = 24		100: $N_{RB,c}$ = 24	
Gap pattern ID			0		0	
Duplex mode			TDD	TDD	TDD	TDD
TDD configuration			TDDConf.3.1		TDDConf.3.1	
PDSCH Reference measurement channel			SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel			CR.3.1 TDD	-	CR.3.1 TDD	-
Dedicated CORESET Reference Channel			CCR.3.1 TDD	-	CCR.3.1 TDD	-
SSB configuration			SSB.3 FR2		SSB.3 FR2	
SMTC configuration			SMTC.1		SMTC.1	
OCNG Patterns			OP.3		OP.3	
Initial BWP Configuration			DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration			DLBWP.1.3 ULBWP.1.3		DLBWP.1.3 ULBWP.1.3	
TRS Configuration			TRS.2.1 TDD		TRS.2.1 TDD	
PDCCH/PDSCH TCI Configuration			TCI.State.2		TCI.State.2	
CSI-RS configuration for RRM			CSI-RS.RRM.FR2.1 TDD		CSI-RS.RRM.FR2.1 TDD	
Time offset between Cell 2 and Cell 3		µs	0.58		0.58	

EPRE ratio of PSS to SSS		dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS Note 1						
EPRE ratio of OCNG to OCNG DMRS Note 1						
Propagation condition		-	AWGN	AWGN	AWGN	AWGN
Antenna configuration		-	1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						

Table A.7.7.7.2.2-2: SS-RSRP inter frequency OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration		Setup 4b according to clause A.3.15.4.2		Setup 4b according to clause A.3.15.4.2	
		AoA1 Spherical coverage	AoA2 Rx Beam Peak	AoA1 Spherical coverage	AoA2 Rx Beam Peak
N_{oc} Note1	dBm/15kHz Note4	-90.6	-90.6	(Table B.2.3.2-2 Rx Beam Peak +1.97dB)	(Table B.2.3.2-2 Rx Beam Peak -3.03dB)
Assumption for UE beams Note 7		Rough		Rough	
N_{oc} Note1	dBm/SCS Note4	-81.6	-81.6	(Table B.2.3.2-2 Rx Beam Peak +11.0dB)	(Table B.2.3.2-2 Rx Beam Peak +6.0dB)
$\hat{E}_s / N_{oc}$	dB	6.0	6.0	17.0	-1.0
CSI-RS_RP Note2	dBm/SCS	-75.60	-75.60	(Table B.2.3.2-2 Rx Beam Peak +28.0dB)	(Table B.2.3.2-2 Rx Beam Peak +5.0dB)
(CSI-RS_RP$_{Cell\ 1}$ – CSI-RS_RP$_{Cell\ 2}$)	dB	0		23.00	
$\hat{E}_s / I_{otBB}$ Note6	dB	5.29	5.96	8.86	-3.92
Io Note2	dBm/95.04 MHz Note4	-50.03	-50.03	(Table B.2.3.2-2 Rx Beam	(Table B.2.3.2-2 Rx Beam

				Peak +52.68dB)	Peak +33.13dB)
($Io_{freq\ 1}$ – $Io_{freq\ 2}$)	dB	0		19.55	
Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 2: CSI-RS_RP, Es/Iot, Io, (CSI-RS_$RP_{Cell\ 2}$ – CSI-RS_$RP_{Cell\ 1}$) and ($Io_{freq\ 2}$ – $Io_{freq\ 1}$) levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 3: Void					
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone					
Note 5: Void					
Note 6: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P or ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.					
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation					

A.7.7.7.2.3 Test Requirements

The CSI-RSRP measurement accuracy for Cell 1 and Cell 2 shall fulfil the absolute requirements in clause 10.1.5.2.1 and the relative requirements in clause 10.1.5.2.2.

Test 1:

Absolute accuracy of Cell 1 and absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported CSI-RSRP is in the range shown in Table A.7.7.7.2.3-1.

Relative accuracy of Cell 2 compared with Cell 1. The UE is deemed to meet the requirement if the difference in reported CSI-RSRP meets the requirements in A.7.7.7.2.3-2.

Test 2:

Absolute accuracy of Cell 1 and absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported CSI-RSRP is in the range shown in Table A.7.7.7.2.3-1.

Relative accuracy of Cell 2 compared with Cell 1. The UE is deemed to meet the requirement if the difference in reported CSI-RSRP meets the requirements in A.7.7.7.2.3-2.

Table A.7.7.7.2.3-1: CSI-RSRP absolute accuracy test requirement

	Test requirement Notes1,2,3,4
Cell 1	CSI-RS_RP1 -δ +G_{min} +X ≤ Reported RSRP(dBm) ≤ CSI-RS_RP1 +δ +G_{max}
Cell 2	CSI-RS_RP2 -δ +G_{min} ≤ Reported RSRP(dBm) ≤ CSI-RS_RP2 +δ +G_{max}
Note 1: CSI-RS_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration	
Note 2: δ is the RSRP absolute accuracy requirement from Table 10.1.5.2.1-1, selected according to the Io used in the test	
Note 3: G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class	
Note 4: X is the Spherical coverage gain difference in dB, derived as (UE Refsens - UE Spherical coverage) from TS 38.101-2 [19] clauses 7.3.2 and 7.3.4, selected according to the UE power class and operating band. X is always a negative value.	

Table A.7.7.7.2.3-2: CSI-RSRP relative accuracy test requirement

	Test requirement Notes1,2,3,4
Cell 2 – Cell 1	CSI-RS_RP2 – CSI-RS_RP1 -δ ≤ Reported RSRP(dB) ≤ CSI-RS_RP2 – CSI-RS_RP1 +δ –(X)
Note 1: CSI-RS_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration	
Note 2: δ is the RSRP relative accuracy requirement from Table 10.1.5.2.2-1	
Note 3: Void	
Note 4: X is the Spherical coverage gain difference in dB, derived as (UE Refsens - UE Spherical coverage) from TS 38.101-2 [19] clauses 7.3.2 and 7.3.4, selected according to the UE power class and operating band. X is always a negative value.	

A.7.7.8 CSI-RSRQ

A.7.7.8.1 SA intra-frequency measurement accuracy with FR2 serving cell and FR2 target cell

A.7.7.8.1.1 Test Purpose and Environment

The purpose of this test is to verify that the CSI-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.8.2.1.

A.7.7.8.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configurations are shown in Table A.7.7.8.1.2-1. The absolute accuracy of CSI-RSRQ intra-frequency measurement is tested by using the parameters in Table A.7.7.8.1.2-2 and Table A.7.7.8.1.2-3. In all test cases, Cell 1 is the PCell and Cell 2 the target cell.

Table A.7.7.8.1.2-1: CSI-RSRQ Intra frequency CSI-RSRQ supported test configurations

Configuration	Description
1	120 kHz SSB and CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.7.8.1.2-2: CSI-RSRQ Intra frequency test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			Freq1		Freq1	
Duplex mode			TDD		TDD	
TDD configuration			TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$		MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
TRS configuration			TRS.2.1 TDD		TRS.2.1 TDD	
TCI state			TCI.State.0		TCI.State.0	
PDSCH Reference measurement channel			SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET Reference Channel			CR.3.1 TDD	-	CR.3.1 TDD	
Control channel RMC			CCR.3.1 TDD	-	CCR.3.1 TDD	-
OCNG Patterns			OP.1	OP.1	OP.1	OP.1

Time offset with Cell 1	µs	-	0.58	-	0.58
SMTC configuration		SMTC.1			
SSB configuration		SSB.1 FR2	SSB.1 FR2	SSB.1 FR2	SSB.1 FR2
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
CSI-RS configuration for RRM		CSI-RS.RRM.FR2.1 TDD			
EPRE ratio of CSI-RS to SSS	dB	0	0	0	0
EPRE ratio of PSS to SSS					
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
$\hat{E}_s / N_{oc}$	dB	3	3	-3	-3
Propagation condition		AWGN		AWGN	
Antenna configuration		1x2		1x2	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Table A.7.7.8.1.2-3: CSI-RSRQ Intra frequency OTA related test parameters

	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1		Setup 1according to clause A.3.15.1	
Assumption for UE beams Note 9		Rough			
N_{OC} Note1	dBm/15kHz Note 4	-95		-95	
N_{OC} Note1	dBm/SCS Note3	-86		-86	
CSI-RSRP Note2	dBm/SCS Note4	-83	-83	-89	-89
CSI-RSRQ Note2	dB	-14.77	-14.77	-16.81	-16.81
$\hat{E}_s / I_{ot}$	dB	-1.76	-1.76	-4.76	-4.76
Io Note2	dBm/95.04 MHz Note4	-50		-54	-54

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{OC} to be fulfilled.
Note 2: CSI-RSRQ, CSI-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: CSI-RSRQ and CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6: NR operating band groups are as defined in Clause 3.5.2.
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.7.8.1.3 Test Requirements

The CSI-RSRQ absolute measurement accuracy in test 1 shall be within the range Nominal CSI-RSRQ+2.5 dB to Nominal CSI-RSRQ-3.5 dB and the CSI-RSRQ measurement accuracy in test 2 shall be within the range Nominal CSI-RSRQ+3.5 dB to Nominal CSI-RSRQ-4.5 dB according to the requirements in clause 10.1.8.2.1 with an additional -1dB margin reflecting the possible impact of UE self noise in the test. Nominal RSRQ is the value shown in table A.7.7.8.1.2-3.

A.7.7.8.2 SA Inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell

A.7.7.8.2.1 Test Purpose and Environment

The purpose of this test is to verify that the CSI-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.10.2.1 and 10.1.10.2.2 for inter-frequency measurement.

A.7.7.8.2.2 Test Parameters

In this test case the two cells (i.e., Cell 1 and Cell 2) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.7.7.8.2.2-1. Both absolute accuracy and relative accuracy requirements of CSI-RSRQ inter-frequency measurement are tested by using test parameters in Table A.7.7.8.2.2-2 and Table A.7.7.8.2.2-3. In all test cases, Cell 1 is the PCell and Cell 2 is target cell.

Table A. 7.7.8.2.2-1: CSI-RSRQ Inter frequency supported test configurations

Configuration	Description
1	120 kHz SSB and CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.7.8.2.2-2: CSI-RSRQ Inter frequency general test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN		Freq1	freq2	freq1	Freq2
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-
OCNG Patterns		OP.1	OP.1	OP.1	OP.1
Time offset with Cell 1	µs	-	0.58	-	0.58
SMTC configuration		SMTC. 1 FR2	SMTC. 1 FR2	SMTC. 1 FR2	SMTC. 1 FR2
CSI-RS configuration for RRM		CSI-RS.RRM.FR2.1 TDD			
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS[Note 1]					
EPRE ratio of CSI-RS to SSS					
$\hat{E}_s / N_{oc}$	dB	-1.75	-1.75	-3	-1.75

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Table A.7.7.8.2.2-3: CSI-RSRQ Inter frequency OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
AoA setup		Setup 1 in clause A.3.15.		Setup 1 in clause A.3.15.	
Assumption for UE beams Note 8		Rough		Rough	
N_{oc} Note1	dBm/15kHz Note4	-94.03		-94.03	
N_{oc} Note1	dBm/SCS Note3	-85.0		-85.0	
CSI-RSRP Note2	dBm/SCS Note4	-86.75	-86.75	-88	-88
CSI-RSRQ Note2	dB	-14.75	-14.75	-15.56	-15.56
$\hat{E}_s / I_{ot}$	dB	-1.75	-1.75	-3	-3
Io Note2	dBm/95.04 MHz Note4	-53.8	-53.8	-54.25	-54.25

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: CSI-RSRQ, CSI-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: CSI-RSRQ and CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.7.8.2.3 Test Requirements

The CSI-RSRQ absolute measurement accuracy in test 1 shall be within the range Nominal CSI-RSRQ+2.5dB to Nominal CSI-RSRQ -3.5dB and the CSI-RSRQ measurement accuracy in test 2 shall be within the range Nominal CSI-RSRQ +3.5dB to Nominal CSI-RSRQ -4.5dB according to the requirements in clause 10.1.10.2.1 with an additional -1dB margin reflecting the possible impact of UE self noise in the test.

The CSI-RSRQ relative measurement accuracy shall fulfil the requirements in clause 10.1.10.2.2.

A.7.7.9 CSI-SINR

A.7.7.9.1 SA intra-frequency case measurement accuracy with FR2 serving cell and FR2 target cell

A.7.7.9.1.1 Test Purpose and Environment

The purpose of this test is to verify that the CSI-SINR measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.13.2.1.

A.7.7.9.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configurations are shown in Table A.7.7.9.1.2-1. . The absolute accuracy of CSI-SINR intra-frequency measurement is test by using the parameters in Table A.7.7.9.1.2-2 and Table A.7.7.9.1.2-3. In all test cases, Cell 1 is the PCell and Cell 2 the target cell. The TCI status for Cell 1 is defined in Table A.3.16.2-1 and TRS configuration for Cell 1 is defined in Table A.3.17.2.1-1.

Table A.7.7.9.1.2-1: CSI-SINR Intra frequency CSI-SINR supported test configurations

Configuration	Description
1	120 kHz SSB and CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.7.9.1.2-2: CSI-SINR Intra frequency test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN		Freq2		Freq2	
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Downlink initial BWP configuration		DLBWP.0.1			
Downlink dedicated BWP configuration		DLBWP.1.1			
Uplink initial BWP configuration		ULBWP.0.1			
Uplink dedicated BWP configuration		ULBWP.1.1			
DRX cycle configuration	ms	Not applicable			
TRS configuration		TRS.2.1 TDD			
TCI state		TCI.State.0			
PDSCH Reference measurement channel		SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	
Dedicated RMSI CORESET Reference Channel		CCR.3.1 TDD	-	CCR.3.1 TDD	-
Time offset with Cell 1	µs	-	0.29	-	0.29
OCNG Patterns		OP.1	OP.1	OP.1	OP.1
SMTC configuration		SMTC.1			
SSB configuration		SSB.1 FR2	SSB.1 FR2	SSB.1 FR2	SSB.1 FR2
CSI-RS configuration for RRM		CSI-RS.RRM.FR2.1 TDD			
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
SS-RSSI-Measurement		Not Applicable			
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of CSI-RS to SSS					
EPRE ratio of OCNG to SSS Note 1					
$\hat{E}_s / N_{oc}$	dB	4.54	2.66	-3	-3
Propagation conditions		AWGN			
Antenna configuration		1x2			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: CSI-SINR, CSI-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: CSI-SINR and CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Table A.7.7.9.1.2-3: CSI-SINR Intra frequency OTA related test parameters

Parameter	Unit	Test 1		Test 3	
		Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1		Setup 1 according to clause A.3.15.1	
Assumption for UE beams Note 9		Rough		Rough	
N_{oc} Note1	dBm/15kHz Note4	-105		-105	
N_{oc} Note1	dBm/SCS Note3	-96		-96	
CSI-RSRP Note2	dBm/SCS Note4	-91.46	-93.34	-99	-99
CSI-SINR Note2	dB	0	-3.2	-4.76	-4.76
$\hat{E}_s / I_{ot}$	dB	0	-3.2	-4.76	-4.76
Io Note2	dBm/95.04 MHz Note4	-59.2		-64	

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: CSI-SINR, CSI-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: CSI-SINR and CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 6: NR operating band groups are as defined in clause 3.5.2.
Note 7: Void
Note 8: Void
Note 9: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.7.9.1.3 Test Requirements

The CSI-SINR absolute measurement accuracy in test 1 shall be within the range Nominal CSI-SINR+XdB to Nominal CSI-SINR –X-1dB and the CSI-SINR measurement accuracy in test 2 shall be within the range Nominal CSI-SINR +YdB to Nominal CSI-SINR –Y-1dB according to the requirements in clause 10.1.13.2.1 with an additional -1dB margin reflecting the possible impact of UE self noise in the test. The relative CSI-SINR measurement accuracy shall fulfil the requirements in clause 10.1.13.2.1.

Editor's note: The values of X and Y are pending on the accuracy requirement discussion

A.7.7.9.2 SA Inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell

A.7.7.9.2.1 Test Purpose and Environment

The purpose of this test is to verify that the CSI-SINR measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.15.2.1 and 10.1.15.2.2 for inter-frequency measurement.

A.7.7.9.2.2 Test Parameters

In this test case the two cells (i.e., Cell 1 and Cell 2) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.7.7.9.2.2-1. Both absolute accuracy and relative accuracy requirements of CSI-SINR inter-frequency measurement are tested by using test parameters in Table A.7.7.9.2.2-2 and Table A.7.7.9.2.2-3. In all test cases, Cell 1 is the PCell and Cell 2 is target cell. The TCI status for Cell 1 is defined in Table A.3.16.2-1 and TRS configuration for Cell 1 is defined in Table A.3.17.2.1-1.

Table A.7.7.9.2.2-1: CSI-SINR Inter frequency CSI-SINR supported test configurations

Configuration	Description
1	120 kHz SSB and CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.7.9.2.2-2: CSI-SINR Inter frequency general test parameters

Parameter	Unit	Test 1		Test 2		Test 3	
		Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN		freq1	freq2	freq1	freq2	freq1	freq2
Duplex mode		TDD		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Downlink initial BWP configuration		DLBWP.0.1					
Downlink dedicated BWP configuration		DLBWP.1.1					
Uplink initial BWP configuration		ULBWP.0.1					
Uplink dedicated BWP configuration		ULBWP.1.1					
DRX cycle configuration	ms	Not applicable					
TRS configuration		TRS.2.1 TDD					
TCI state		TCI.State.0					
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-	CR.3.1 TDD	-
Time offset with Cell 1	µs	-	0.29	-	0.29	-	0.29
OCNG Patterns		OP.1	OP.1	OP.1	OP.1	OP.1	OP.1
SMTC configuration		SMTC. 1 FR2	SMTC. 1 FR2	SMTC. 1 FR2	SMTC. 1 FR2	SMTC. 1 FR2	SMTC. 1 FR2
CSI-RS configuration for RRM		CSI-RS.RRM.FR2.1 TDD					
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120	120	120
EPRE ratio of PSS to SSS EPRE ratio of PBCH_DMRS to SSS EPRE ratio of PBCH to PBCH_DMRS EPRE ratio of PDCCH_DMRS to SSS EPRE ratio of PDCCH to PDCCH_DMRS EPRE ratio of PDSCH_DMRS to SSS EPRE ratio of PDSCH to PDSCH_DMRS EPRE ratio of OCNG to SSS[Note 1]	dB	0	0	0	0	0	0
$\hat{E}_s / N_{oc}$	dB	-0.5	-0.5	11.0	11.0	-3.0	-3.0

Propagation conditions		AWGN
Antenna configuration		1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: CSI-SINR, CSI-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: CSI-SINR and CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Table A.7.7.9.2.2-3: CSI-SINR Inter frequency OTA related test parameters

Parameter	Unit	Test 1		Test 2		Test 3	
		Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration	degrees	Setup 1 according to A.3.15.1		Setup 1 according to A.3.15.1		Setup 1 according to A.3.15.1	
Assumption for UE beams[Note 10]		Rough		Rough		Rough	
N_{oc} [Note1]	dBm/15kHz [Note4]	-105		-105		-105	
N_{oc} [Note1]	dBm/SCS [Note3]	-96		-96		-96	
CSI-RSRP[Note2]	dBm/SCS [Note4]	-96.5	-96.5	-85	-85	-99	-99
CSI-SINR[Note2]	dB	-0.5	-0.5	11	11	-3.0	-3.0
$\hat{E}_s / I_{ot}$	dB	-0.5	-0.5	11	11	-3.0	-3.0
Io[Note2]	dBm/95.04 MHz [Note4]	-69.3		-55.4		-65.24	

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: CSI-SINR, CSI-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: CSI-SINR and CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 6: NR operating band groups are as defined in clause 3.5.2.
Note 7: Void
Note 8: Void
Note 9: Void
Note 10: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.7.9.2.3 Test Requirements

The CSI-SINR absolute measurement accuracy in test 1 shall be within the range Nominal CSI-SINR +XdB to Nominal CSI-SINR –X-1dB and the CSI-SINR measurement accuracy in test 2 shall be within the range Nominal CSI-SINR +YdB to Nominal CSI-SINR –Y-1dB according to the requirements in clause 10.1.15.2.1 with an additional -1dB margin reflecting the possible impact of UE self noise in the test.

The CSI-SINR relative measurement accuracy shall fulfil the requirements in clause 10.1.15.2.2.

A.7.7.10 RSTD measurements

A.7.7.10.1 RSTD measurement accuracy test case for single positioning frequency layer

A.7.7.10.1.1 Test purpose and Environment

The purpose of the test is to verify that the RSTD measurement meets the accuracy requirements specified in clause 10.1.23.2 in an environment with AWGN propagation conditions.

The supported test configurations are specified in Table A.7.7.10.1.1-1.

Table A.7.7.10.1.1-1: Supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

In the test there are two synchronous cells: Cell 1 and Cell 2. Cell 1 is the reference as well as the PCell. Cell 2 is a neighbour cells. Both cells are on the same NR RF channel in FR2. GP#24 is configured if UE supports GP#24, otherwise, GP#13 is configured for the test. The *NR-TDOA-ProvideAssistanceData* and *NR-TDOA-RequestLocationInformation* message as defined in TS 37.355 shall be provided to the UE before the start of the test. The test duration should be larger than the UE measurement period as defined in clause 9.9.2.

Table A.7.7.10.1.1-2: RSTD accuracy test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
PRS ARFCN		freq1		freq1	
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Measurement gap		GP#24 or GP#13		GP#24 or GP#13	
Downlink initial BWP configuration		DLBWP.0.1	-	DLBWP.0.1	-
Downlink dedicated BWP configuration		DLBWP.1.1	-	DLBWP.1.1	-
Uplink initial BWP configuration		ULBWP.0.1	-	ULBWP.0.1	-
Uplink dedicated BWP configuration		ULBWP.1.1	-	ULBWP.1.1	-
DRX cycle configuration		Not applicable	-	Not applicable	-
TRS configuration		TRS.2.1 TDD	-	TRS.2.1 TDD	-
TCI state		TCI.State.0	-	TCI.State.0	-
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-
Control channel RMC		CCR.3.1 TDD	-	CCR.3.1 TDD	-
OCNG Patterns		OP.1	OP.1	OP.1	OP.1
SSB configuration		SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
SMTC configuration		SMTC.1	SMTC.1	SMTC.1	SMTC.1
PRS configuration		PRS.1.1 FR2	PRS.1.1 FR2	PRS.1.2 FR2	PRS.1.2 FR2
PRS Resource slot offset	slot	0	4	0	4
Expected RSTD	µs	N/A	3	N/A	3
Expected RSTD uncertainty	µs	N/A	5	N/A	5
Time offset with Cell 1	µs	-	3	-	3

PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
EPRE ratio of PRS to SSS	dB	0	0	0	0
Propagation conditions		AWGN	AWGN	AWGN	AWGN
Antenna configuration		1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols other than those in the slots with transmitted PRS.					

Table A.7.7.10.1.1-3: RSTD accuracy OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1			
Assumption for UE beams Note 5		Rough		Rough	
N_{oc} Note1	dBm/SCS Note3	-98		-98	
PRS $\hat{E}_s / N_{oc}$	dB	-5.7	-11.9	-5.7	-11.9
PRP Note2	dBm/SCS	-103.7	-109.9	-103.7	-109.9
PRS $\hat{E}_s / I_{ot}$	dB	-6	-13	-6	-13
Io Note2	dBm/95.04 MHz Note3	-67.76	-67.76	-67.76	-67.76
Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 2: PRP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. The Io is calculated based only on the symbols in which PRS is transmitted.					
Note 3: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone					
Note 4: Calculation of Es/Iot includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.					

Note 5:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.7.10.1.2 Test Requirements

The RSTD measurement accuracy for Cell 2 shall fulfil the absolute requirement in clause 10.1.23.2.

A.7.7.10.2 RSTD measurement accuracy test case for dual positioning frequency layer

A.7.7.10.2.1 Test purpose and Environment

The purpose of the test is to verify that the RSTD measurement meets the accuracy requirements specified in clause 10.1.23.2 in an environment with AWGN propagation conditions. The *NR-TDOA-ProvideAssistanceData* and *NR-TDOA-RequestLocationInformation* message as defined in TS 37.355 shall be provided to the UE before the start of the test. The test duration should be larger than the UE measurement period as defined in clause 9.9.2.

The supported test configurations are specified in Table A.7.7.10.2.1-1.

Table A.7.7.10.2.1-1: Supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

In the test there are two synchronous cells: Cell 1 and Cell 2. Cell 1 is the reference as well as the PCell on NR RF channel #1 in FR2. Cell 2 is a neighbour cell on a different NR RF channel #2 in FR2. GP#24 is configured if UE supports GP#24, otherwise, GP#13 is configured for the test.

Table A.7.7.10.2.1-2: RSTD accuracy test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
PRS ARFCN		freq1	freq2	freq1	freq2
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Measurement gap		GP#24 or GP#13		GP#24 or GP#13	
Downlink initial BWP configuration		DLBWP.0.1	-	DLBWP.0.1	-
Downlink dedicated BWP configuration		DLBWP.1.1	-	DLBWP.1.1	-
Uplink initial BWP configuration		ULBWP.0.1	-	ULBWP.0.1	-
Uplink dedicated BWP configuration		ULBWP.1.1	-	ULBWP.1.1	-
DRX cycle configuration		Not applicable	-	Not applicable	-
TRS configuration		TRS.2.1 TDD	-	TRS.2.1 TDD	-
TCI state		TCI.State.0	-	TCI.State.0	-

PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-
Control channel RMC		CCR.3.1 TDD	-	CCR.3.1 TDD	-
OCNG Patterns		OP.1	OP.1	OP.1	OP.1
SSB configuration		SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
SMTC configuration		SMTC.1	SMTC.1	SMTC.1	SMTC.1
PRS configuration		PRS.1.1 FR2	PRS.1.1 FR2	PRS.1.2 FR2	PRS.1.2 FR2
PRS Resource slot offset	slot	0	4	0	4
Expected RSTD	µs	N/A	3	N/A	3
Expected RSTD uncertainty	µs	N/A	5	N/A	5
Time offset with Cell 1	µs	-	3	-	3
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
EPRE ratio of PRS to SSS	dB	0	0	0	0
Propagation conditions		AWGN	AWGN	AWGN	AWGN
Antenna configuration		1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols other than those in the slots with transmitted PRS.					

Table A.7.7.10.2.1-3: RSTD accuracy OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1			
Assumption for UE beams Note 5		Rough		Rough	

N_{OC} Note1	dBm/SCS Note3	-98		-98	
PRS $\hat{E}_s / N_{OC}$	dB	-6	-13	-6	-13
PRP Note2	dBm/SCS	-104	-111	-104	-111
PRS $\hat{E}_s / I_{ot}$	dB	-6	-13	-6	-13
Io Note2	dBm/95.04 MHz Note3	-68.04	-68.80	-68.04	-68.80

Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{OC} to be fulfilled.

Note 2: PRP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. The Io is calculated based only on the symbols in which PRS is transmitted.Note 3: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone

Note 4: Calculation of Es/Iot includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

Note 5: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.7.10.2.2 Test Requirements

The RSTD measurement accuracy for Cell 2 shall fulfil the absolute requirement in clause 10.1.23.2.

A.7.7.10.3 RSTD measurement accuracy test case with reduced number of samples for single positioning frequency layer in FR2 in RRC_CONNECTED state

A.7.7.10.3.1 Test purpose and Environment

The purpose of the test is to verify that the RSTD measurement meets the accuracy requirements specified in clause 10.1.23.2 in an environment with AWGN propagation conditions. In this test UE that supports *supportedDL-PRS-ProcessingSamples* is configured by LMF to perform PRS measurement with reduced number of samples.

The supported test configurations are specified in Table A.7.7.10.3.1-1.

Table A.7.7.10.3.1-1: Supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

In the test there are two synchronous cells: Cell 1 and Cell 2. Cell 1 is the reference as well as the PCell. Cell 2 is a neighbour cell. Both cells are on the same NR RF channel in FR2. GP#24 is configured if UE supports GP#24, otherwise, GP#13 is configured for the test. The *NR-TDOA-ProvideAssistanceData* and *NR-TDOA-RequestLocationInformation* message as defined in TS 37.355 shall be provided to the UE before the start of the test. The test duration should be longer than the UE measurement period as defined in clause 9.9.2.7.

Table A.7.7.10.3.1-2: RSTD accuracy test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
PRS ARFCN		freq1		freq1	
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Downlink initial BWP configuration		DLBWP.0.1	-	DLBWP.0.1	-
Downlink dedicated BWP configuration		DLBWP.1.1	-	DLBWP.1.1	-
Uplink initial BWP configuration		ULBWP.0.1	-	ULBWP.0.1	-
Uplink dedicated BWP configuration		ULBWP.1.1	-	ULBWP.1.1	-
DRX cycle configuration		Not applicable	-	Not applicable	-
TRS configuration		TRS.2.1 TDD	-	TRS.2.1 TDD	-
TCI state		TCI.State.0	-	TCI.State.0	-
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-
Control channel RMC		CCR.3.1 TDD	-	CCR.3.1 TDD	-
OCNG Patterns		OP.3	OP.3	OP.3	OP.3
SSB configuration		SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
SMTC configuration		SMTC.1	SMTC.1	SMTC.1	SMTC.1
PRS configuration		PRS.1.4 FR2	PRS.1.4 FR2	PRS.1.4 FR2	PRS.1.4 FR2
PRS BW		48 PRBs			
PRS Resource slot offset	slot	0	4	0	4
Expected RSTD	µs	N/A	3	N/A	3
Expected RSTD uncertainty	µs	N/A	5	N/A	5
Time offset with Cell 1	µs	-	3	-	3
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
Propagation conditions		AWGN	AWGN	AWGN	AWGN
Antenna configuration		1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					

Table A.7.7.10.3.1-3: RSTD accuracy OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1			

Assumption for UE beams Note 5		Rough		Rough	
N_{oc} Note1	dBm/SCS Note3	-98		-98	
$\hat{E}_s / N_{oc}$	dB	-3	5	-3	5
PRS-RSRP Note2	dBm/SCS	-101	-93	-101	-93
SS-RSRP Note2	dBm/SCS	-89.7	N/A	-89.7	N/A
$\hat{E}_s / I_{ot}$ BB Note4	dB	-3	5	-3	5
Io Note2	dBm/95.04 MHz Note3	-68.5	-66.9	-68.5	-66.9

Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 2: SSB_RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 3: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone

Note 4: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

Note 5: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.7.10.3.2 Test Requirements

The RSTD measurement accuracy for Cell 2 shall fulfil the absolute requirement in clause 10.1.23.2.

A.7.7.10.4 RSTD measurement accuracy test case with Rx TEG

A.7.7.10.4.1 Test purpose and Environment

The purpose of the test is to verify that the RSTD measurement when the measurements of reference cell and neighbor cell are within the same Rx TEG meets the accuracy requirements specified in clause 10.1.23.2 in an environment with AWGN propagation conditions.

The supported test configurations are specified in Table A.7.7.10.4.1-1.

Table A.7.7.10.4.1-1: Supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

In the test there are two synchronous cells: Cell 1 and Cell 2. Cell 1 is the reference as well as the PCell. Cell 2 is a neighbour cell. Both cells are on the same NR RF channel in FR2. GP#24 is configured if UE supports GP#24, otherwise, GP#13 is configured for the test. The *NR-TDOA-ProvideAssistanceData* and *NR-TDOA-RequestLocationInformation* message as defined in TS 37.355 shall be provided to the UE before the start of the test.

The UE is requested to provide the Rx TEG in the test via *nr-UE-RxTEG-Request-r17* in *NR-TDOA-RequestLocationInformation*.

The test applies to the UE supporting *Rx TEG* defiend in *NR-UE-TEG-Capability* and reporting the same Rx TEG for the measurements of reference cell and neighbour cell.

Table A.7.7.10.4.1-2: RSTD accuracy test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
PRS ARFCN		freq1		freq1	
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Downlink initial BWP configuration		DLBWP.0.1	-	DLBWP.0.1	-
Downlink dedicated BWP configuration		DLBWP.1.1	-	DLBWP.1.1	-
Uplink initial BWP configuration		ULBWP.0.1	-	ULBWP.0.1	-
Uplink dedicated BWP configuration		ULBWP.1.1	-	ULBWP.1.1	-
DRX cycle configuration		Not applicable	-	Not applicable	-
TRS configuration		TRS.2.1 TDD	-	TRS.2.1 TDD	-
TCI state		TCI.State.0	-	TCI.State.0	-
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-
Control channel RMC		CCR.3.1 TDD	-	CCR.3.1 TDD	-
OCNG Patterns		OP.1	OP.1	OP.1	OP.1
SSB configuration		SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
SMTC configuration		SMTC.1	SMTC.1	SMTC.1	SMTC.1
PRS configuration		PRS.1.1 FR2	PRS.1.1 FR2	PRS.1.2 FR2	PRS.1.2 FR2
PRS Resource slot offset	slot	0	4	0	4
Expected RSTD	µs	N/A	3	N/A	3
Expected RSTD uncertainty	µs	N/A	5	N/A	5
Time offset with Cell 1	µs	-	3	-	3
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
EPRE ratio of PRS to SSS					
Propagation conditions		AWGN	AWGN	AWGN	AWGN
Antenna configuration		1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					

Table A.7.7.10.4.1-3: RSTD accuracy OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1			

Assumption for UE beams Note 5		Rough		Rough	
N_{OC} Note1	dBm/SCS Note3	-98		-98	
PRS $\hat{E}_s / N_{oc}$	dB	-5	-11	-5	-11
PRP Note2	dBm/SCS	-103	-109	-103	-109
PRS $\hat{E}_s / I_{ot}$ Note4	dB	-5.33	-12.19	-5.33	-12.19
Io Note2	dBm/95.04 MHz Note3	-67.57	-67.57	-67.57	-67.57

Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: PRP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 4: Calculation of Es/Iot includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.
Note 5: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.7.10.4.2 Test Requirements

The RSTD measurement for Cell 1 and Cell 2 should both fulfil the absolute accuracy requirements with same Rx TEG for reference cell and neighbour cell defined in clause 10.1.23.2.

A.7.7.11 PRS-RSRP measurements

A.7.7.11.1 SA measurement accuracy with PRS in FR2

A.7.7.11.1.1 Test Purpose and Environment

The purpose of this test is to verify that the PRS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1.24.2.1 and 10.1.24.2.2.

A.7.7.11.1.2 Test parameters

In this set of test cases all cells are on the same carrier frequency. Supported test configurations are shown in Table A.7.7.11.1.2-1. Both absolute and relative accuracy of PRS-RSRP measurements are tested by using the parameters in Table A.7.7.11.1.2-2 and A.7.7.11.1.2-3. In all test cases, Cell 1 is the PCell. The TCI status for Cell 1 is defined in Table A.3.16.2-1 and TRS configuration for Cell 1 is defined in Table A.3.17.2.1-1.

Table A.7.7.11.1.2-1: PRS-RSRP supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.7.11.1.2-2: PRS-RSRP general test parameters

Parameter	Unit	Test 1	Test 2

		Cell 1	Cell 2	Cell 1	Cell 2
Cell ID		489	0	489	0
SSB ARFCN		freq1		freq1	
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Downlink initial BWP configuration		DLBWP.0.1	-	DLBWP.0.1	-
Downlink dedicated BWP configuration		DLBWP.1.1	-	DLBWP.1.1	-
Uplink initial BWP configuration		ULBWP.0.1	-	ULBWP.0.1	-
Uplink dedicated BWP configuration		ULBWP.1.1	-	ULBWP.1.1	-
DRX cycle configuration		Not applicable	-	Not applicable	-
Measurement gap		GP#13 or GP#24 Note2			
TRS configuration		TRS.2.1 TDD	-	TRS.2.1 TDD	-
TCI state		TCI.State.0	-	TCI.State.0	-
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-
Control channel RMC		CCR.3.1 TDD	-	CCR.3.1 TDD	-
OCNG Patterns		OP.1	OP.1	OP.1	OP.1
SSB configuration		SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
SMTC configuration		SMTC.1	SMTC.1	SMTC.1	SMTC.1
Time offset with Cell 1	µs	-	3	-	3
Expected RSTD	µs	3			
Expected RSTD uncertainty	µs	5			
PRS configuration		PRS.1.3 FR2	PRS.1.3 FR2	PRS.1.4 FR2	PRS.1.4 FR2
PRS Resource slot offset	slot	0	4	0	4
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
EPRE ratio of PRS to SSS	dB	0	0	0	0
Propagation conditions		AWGN	AWGN	AWGN	AWGN
Antenna configuration		1x2	1x2	1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: GP#24 is configured if UE supports MG#24, otherwise GP#13 is configured.

Table A.7.7.11.1.2-3: PRS-RSRP OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1			
Assumption for UE beams[Note 7]		Rough		Rough	
N_{OC} [Note1]	dBm/15kHz[Note4]	-91.6		-91.6	
N_{OC} [Note1]	dBm/SCS[Note4]	-82.6		-82.6	
PRS $\hat{E}_s / N_{oc}$	dB	-3	-10	-3	-10
PRP[Note2]	dBm/SCS	-85.6	-92.6	-85.6	-92.6
PRS $\hat{E}_s / I_{ot}$	dB	-3.41	-11.76	-3.41	-11.76
Io[Note2]	dBm/95.04 MHz [Note4]	-51.57		-51.57	

Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{OC} to be fulfilled.
Note 2: PRP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: Void
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5: Void
Note 6: Calculation of Es/Iot includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.7.11.1.3 Test Requirements

In each test, the absolute PRS-RSRP measurement for each cell shall fulfil the absolute accuracy requirement in clause 10.1.24.2.1 if the reported PRS-RSRP is in the range shown in table A.7.7.11.1.3-1. The relative PRS-RSRP measurement between the two PRS resources within the same cell shall fulfil the relative accuracy requirement in clause 10.1.24.2.2.

Table A.7.7.11.1.3-1: PRS-RSRP absolute accuracy test requirement

	Test requirement [Notes1,2,3]
Cell 1	PRS_RP1 -δ +G_{min} ≤ Reported RSRP(dBm) ≤ PRS_RP1 +δ +G_{max}
Cell 2	PRS_RP2 -δ +G_{min} ≤ Reported RSRP(dBm) ≤ PRS_RP2 +δ +G_{max}

Note 1: PRS_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration.
Note 2: δ is the RSRP absolute accuracy requirement from Table 10.1.24.2.1-2, selected according to the Io used in the test.

Note 3:	G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.6.1-1, selected according to the UE power class

A.7.7.11.2 SA measurement accuracy with PRS in FR2 with reduced sample number

A.7.7.11.2.1 Test Purpose and Environment

The purpose of this test is to verify that the accuracy of PRS-RSRP measurement with reduced sample number is within the specified limits. This test will verify the requirements in clauses 10.1.24.2.1 and 10.1.24.2.2.

A.7.7.11.2.2 Test parameters

In this set of test cases all cells are on the same carrier frequency. Supported test configurations are shown in Table A.7.7.11.2.2-1. Both absolute and relative accuracy of PRS-RSRP measurements are tested by using the parameters in Table A.7.7.11.2.2-2 and A.7.7.11.2.2-3. In all test cases, Cell 1 is the PCell. The TCI status for Cell 1 is defined in Table A.3.16.2-1 and TRS configuration for Cell 1 is defined in Table A.3.17.2.1-1.

Table A.7.7.11.2.2-1: PRS-RSRP supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.7.11.2.2-2: PRS-RSRP general test parameters

Parameter	Unit	Test 1	
		Cell 1	Cell 2
Cell ID		489	0
SSB ARFCN		freq1	
Duplex mode		TDD	
TDD configuration		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66	
Downlink initial BWP configuration		DLBWP.0.1	-
Downlink dedicated BWP configuration		DLBWP.1.1	-
Uplink initial BWP configuration		ULBWP.0.1	-
Uplink dedicated BWP configuration		ULBWP.1.1	-
DRX cycle configuration		Not applicable	-
Measurement gap		GP#13 or GP#24 Note2	
TRS configuration		TRS.2.1 TDD	-
TCI state		TCI.State.0	-
PDSCH Reference measurement channel		SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-
Control channel RMC		CCR.3.1 TDD	-
OCNG Patterns		OP.3	OP.3
SSB configuration		SSB.3 FR2	SSB.3 FR2
SMTC configuration		SMTC.1	SMTC.1
Time offset with Cell 1	µs	-	3
PRS configuration		PRS.1.4 FR2	PRS.1.4 FR2
PRS BW	RB	64	64
PRS Resource slot offset	slot	0	4
PDSCH/PDCCH subcarrier spacing	kHz	120	120
EPRE ratio of PSS to SSS	dB	0	0
EPRE ratio of PBCH_DMRS to SSS			
EPRE ratio of PBCH to PBCH_DMRS			
EPRE ratio of PDCCH_DMRS to SSS			
EPRE ratio of PDCCH to PDCCH_DMRS			

EPRE ratio of PDSCH_DMRS to SSS			
EPRE ratio of PDSCH to PDSCH_DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation conditions		AWGN	AWGN
Antenna configuration		1x2	1x2
`Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: GP#24 is configured if UE supports MG#24, otherwise GP#13 is configured.			

Table A.7.7.11.2.2-3: PRS-RSRP OTA related test parameters

Parameter	Unit	Test 1	
		Cell 1	Cell 2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1	
Assumption for UE beams Note 7		Rough	
N_{oc} Note1	dBm/15kHz Note4	-91.6	
N_{oc} Note1	dBm/SCS Note4	-82.6	
$\hat{E}_s / N_{oc}$	dB	-6	-6
E_s	dBm/SCS Note4	-	-
PRS_RP Note2	dBm/SCS	-88.6	-88.6
SSB_RP Note2	dBm/SCS	-88.6	-88.6
$\hat{E}_s / I_{ot}$ BB Note6	dB	-6	-6
Io Note2	dBm/95.04 MHz Note4	-52.64	
Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 2: SSB_RP, PRS_RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 3: Void			
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone			
Note 5: Void			
Note 6: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.			
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation			

A.7.7.11.2.3 Test Requirements

In the test, the absolute PRS-RSRP measurement for each cell shall fulfil the absolute accuracy requirement in clause 10.1.24.2.1 if the reported PRS-RSRP is in the range shown in table A.7.7.11.2.3-1. The relative PRS-RSRP measurement between the two PRS resources within the same cell shall fulfil the relative accuracy requirement in clause 10.1.24.2.2.

Table A.7.7.11.2.3-1: PRS-RSRP absolute accuracy test requirement

	Test requirement Notes1,2,3
Cell 1	PRS_RP1 -δ +G_{min} ≤ Reported RSRP(dBm) ≤ PRS_RP1 +δ +G_{max}
Cell 2	PRS_RP2 -δ +G_{min} ≤ Reported RSRP(dBm) ≤ PRS_RP2 +δ +G_{max}
Note 1: PRS_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration.	

Note 2:	δ is the RSRP absolute accuracy requirement from Table 10.1.24.2.1-2, selected according to the Io used in the test.
Note 3:	G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.6.1-1, selected according to the UE power class

A.7.7.12 UE Rx-Tx time difference measurements

A.7.7.12.1 UE Rx-Tx time difference measurement accuracy for single positioning frequency layer in FR2 SA

A.7.7.12.1.1 Test purpose and environment

The purpose of the test is to verify that the UE Rx-Tx time difference measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.25.2. The test is conducted in AWGN propagation condition in FR2 in standalone scenario when single positioning frequency layer is configured.

The supported test configuration is listed in Table A.7.7.12.1.1-1.

Table A.7.7.12.1.1-1: Supported test configurations

Config	Description
1	120 kHz SSB and PRS SCS, 100 MHz bandwidth, TDD duplex mode

There are two cells in the test: PCell (Cell 1) and a neighbour cell (Cell 2). Both cells are on the same RF channel in FR2.

The *NR-Multi-RTT-ProvideAssistanceData* and *nr-Multi-RTT-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE before the start of the test.

The UE is configured with measurement gap pattern ID #13 or ID #24 before the test.

The UE is configured to transmit positioning SRS on Cell 1 during the test.

The test equipment measures the transmit timing of the UE using the transmitted SRS and measures the receive timing using the PRS. The test equipment then compares the difference of these two timings to the UE Rx-Tx measurement reported by the UE for each cell.

A.7.7.12.1.2 Test parameters

The UE Rx-Tx time difference accuracy test parameters are given in Table A.7.7.12.1.2-1.

Table A.7.7.12.1.2-1: UE Rx-Tx time difference measurement accuracy test parameters

Parameter	Unit	Test configuration	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
AoA setup		1	Setup 1 as specified in clause A.3.15		Setup 1 as specified in clause A.3.15	
Beam Assumption[Note 7]		1	Rough	Rough	Rough	Rough
Measurement gap		1	GP#24 or GP#13 [Note 8]		GP#24 or GP#13 [Note 8]	
DRX		1	OFF		OFF	
Time offset with Cell 1	µs	1	N/A	3	N/A	3
TDD configuration		1	TDDConf.3.1	TDDConf.3.1	TDDConf.3.1	TDDConf.3.1

PDSCH RMC configuration		1	SR.3.1 TDD	N/A	SR.3.1 TDD	N/A
RMSI CORESET RMC configuration		1	CR.3.1 TDD	N/A	CR.3.1 TDD	N/A
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD	N/A	CCR.3.1 TDD	N/A
OCNG Patterns		1	OP.1	OP.1	OP.1	OP.1
EPRE ratio of PSS to SSS	dB	1	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS Note 1						
EPRE ratio of OCNG to OCNG DMRS Note 1						
EPRE ratio of PRS to SSS						
TRS Configuration		1	TRS.2.1 TDD	N/A	TRS.2.1 TDD	N/A
Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1	N/A	DLBWP.0.1 ULBWP.0.1	N/A
Active DL BWP configuration		1	DLBWP.1.1	N/A	DLBWP.1.1	N/A
Active UL BWP configuration		1	ULBWP.1.1	N/A	ULBWP.1.1	N/A
PRS configuration		1	PRS.1.1 FR2	PRS.1.1 FR2	PRS.1.2 FR2	PRS.1.2 FR2
PRS Resource slot offset	slot	1	0	4	0	4
SRS configuration		1	POS-SRS.3	N/A	POS-SRS.3	N/A
N_{oc} Note 2	dBm/SCS	1	-89		-89	

N_{oc} Note 2	dBm/15 kHz	1	-98		-98	
PRS $\hat{E}_s/I_{ot}$	dB	1	-2.41	-12.12	-2.41	-12.12
PRS $\hat{E}_s/N_{oc}$	dB	1	-2	-10	-2	-10
PRP Note 3	dBm/SCS kHz	1	-91	-99	-91	-99
Io	dBm/95.04 MHz	1	-57.63	-57.63	-57.63	-57.63
Propagation Condition		1	AWGN		AWGN	

Note 1: Void.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: PRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 8: GP#24 is configured if UE supports MG#24, otherwise GP#13 is configured.

Table A.7.7.12.1.2-2: Void

A.7.7.12.1.3 Test requirements

The UE Rx-Tx time difference measurement fulfils the UE Rx-Tx measurement accuracy requirements specified in clause 10.1.25.2 for both Cell 1 and Cell 2.

A.7.7.12.2 UE Rx-Tx time difference measurement accuracy with reduced number of samples in FR2 SA

A.7.7.12.2.1 Test purpose and environment

The purpose of the test is to verify that the UE Rx-Tx time difference measurement accuracy with reduced number of samples is within the specified limits. This test will verify the requirements in clause 10.1.25.2. The test is conducted in AWGN propagation condition in FR2 in standalone scenario when single positioning frequency layer is configured.

The supported test configuration is listed in Table A.7.7.12.2.1-1.

Table A.7.7.12.2.1-1: Supported test configurations

Config	Description
1	120 kHz SSB and PRS SCS, 100 MHz bandwidth, TDD duplex mode

There are two cells in the test: PCell (Cell 1) and a neighbour cell (Cell 2). All cells are on the same RF channel in FR2.

The *NR-Multi-RTT-ProvideAssistanceData* and *NR-Multi-RTT-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE before the start of the test.

The UE is configured to measure UE Rx-Tx time difference using reduced number of samples via *requestedDL-PRS-ProcessingSamples* in *NR-Multi-RTT-RequestLocationInformation* during the test.

The UE is configured with measurement gap pattern ID #13 or ID #24 before the test.

The UE is configured to transmit positioning SRS on Cell 1 during the test.

The test equipment measures the transmit timing of the UE using the transmitted SRS and measures the receive timing using the PRS. The test equipment then compares the difference of these two timings to the UE Rx-Tx measurement reported by the UE for each cell.

A.7.7.12.2.2 Test parameters

The UE Rx-Tx time difference accuracy test parameters are given in Table A.7.7.12.2.2-1.

Table A.7.7.12.2.2-1: UE Rx-Tx time difference measurement accuracy test parameters

Parameter	Unit	Test configuration	Test 1	
			Cell 1	Cell 2
AoA setup		1	Setup 1 as specified in clause A.3.15	
Beam Assumption Note 7		1	Rough	Rough
Measurement gap		1	GP#24 or GP#13 Note 8	
DRX		1	OFF	
Time offset with Cell 1	μs	1	N/A	3
TDD configuration		1	TDDConf.3.1	TDDConf.3.1
PDSCH RMC configuration		1	SR.3.1 TDD	N/A
RMSI CORESET RMC configuration		1	CR.3.1 TDD	N/A
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD	N/A
OCNG Patterns		1	OP.1	OP.1
EPRE ratio of PSS to SSS	dB	1	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
EPRE ratio of PRS to SSS				
TRS Configuration		1	TRS.2.1 TDD	N/A
Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1	N/A
Active DL BWP configuration		1	DLBWP.1.1	N/A
Active UL BWP configuration		1	ULBWP.1.1	N/A
PRS configuration		1	PRS.1.1 FR2	PRS.1.1 FR2
PRS BW		1	48 PRBs	48 PRBs

PRS Resource slot offset	slot	1	0	4
SRS configuration		1	POS-SRS.3	N/A
N_{oc} Note 2	dBm/SCS	1	-89	
N_{oc} Note 2	dBm/15 kHz	1	-98	
PRS $\hat{E}_s/I_{ot}$	dB	1	-1.76	-6.01
PRS $\hat{E}_s/N_{oc}$	dB	1	0	-3
PRP Note 3	dBm/SCS kHz	1	-89	-92
Io	dBm/95.04 MHz	1	-56.03	-56.03
Propagation Condition		1	AWGN	

Note 1: Void.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: PRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: PRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 8: GP#24 is configured if UE supports MG#24, otherwise GP#13 is configured.

A.7.7.12.2.3 Test requirements

The UE Rx-Tx time difference measurement with reduced number of samples fulfils the UE Rx-Tx measurement accuracy requirements specified in clause 10.1.25.2 for both Cell 1 and Cell 2.

A.7.7.12.3 UE Rx-Tx time difference measurement accuracy with RxTx TEG

A.7.7.12.3.1 Test purpose and environment

The purpose of the test is to verify that the relative UE Rx-Tx time difference measurement accuracy when the two measurements are within the same RxTx TEG is within the specified limits. This test will verify the requirements in clause 10.1.25.x. The test is conducted in AWGN propagation condition in FR2 in standalone scenario when single positioning frequency layer is configured.

The supported test configuration is listed in Table A.7.7.12.3.1-1.

Table A.7.7.12.3.1-1: Supported test configurations

Config	Description
1	120 kHz SSB and PRS SCS, 100 MHz bandwidth, TDD duplex mode

There are two cells in the test: PCell (Cell 1) and a neighbour cell (Cell 2). Both cells are on the same RF channel in FR2.

The *NR-Multi-RTT-ProvideAssistanceData* and *nr-Multi-RTT-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE before the start of the test.

The UE is requested to provide the RxTx TEG in the test via *nr-UE-RxTxTEG-Request-r17* in *NR-Multi-RTT-RequestLocationInformation*.

The test applies to the UE supporting *RxTx TEG* defiend in *NR-UE-TEG-Capability* and reporting the same RxTx TEG for the two UE Rx-Tx measurements.

The UE is configured with measurement gap pattern ID #13 or ID #24 before the test.

The UE is configured to transmit positioning SRS on Cell 1 during the test.

The test equipment measures the transmit timing of the UE using the transmitted SRS and measures the receive timing using the PRS. The UE Rx-Tx time difference is derived by the difference of the receiving timing and the transmit timing for each cell.

A.7.7.12.3.2 Test parameters

The UE Rx-Tx time difference accuracy test parameters are given in Table A.7.7.12.3.2-1.

Table A.7.7.12.3.2-1: UE Rx-Tx time difference measurement accuracy test parameters

Parameter	Unit	Test configuration	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
AoA setup		1	Setup 1 as specified in clause A.3.15		Setup 1 as specified in clause A.3.15	
Beam Assumption[Note 7]		1	Rough	Rough	Rough	Rough
Measurement gap		1	GP#24 or GP#13 [Note 8]		GP#24 or GP#13 [Note 8]	
DRX		1	OFF		OFF	
Time offset with Cell 1	μs	1	N/A	3	N/A	3
TDD configuration		1	TDDConf.3.1	TDDConf.3.1	TDDConf.3.1	TDDConf.3.1
PDSCH RMC configuration		1	SR.3.1 TDD	N/A	SR.3.1 TDD	N/A
RMSI CORESET RMC configuration		1	CR.3.1 TDD	N/A	CR.3.1 TDD	N/A
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD	N/A	CCR.3.1 TDD	N/A
OCNG Patterns		1	OP.1	OP.1	OP.1	OP.1
EPRE ratio of PSS to SSS	dB	1	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						
EPRE ratio of PDCCH to PDCCH_DMRS						
EPRE ratio of PDSCH_DMRS to SSS						

EPRE ratio of PDSCH to PDSCH_DMRS EPRE ratio of OCNG DMRS to SSS Note 1 EPRE ratio of OCNG to OCNG DMRS Note 1 EPRE ratio of PRS to SSS						
TRS Configuration		1	TRS.2.1 TDD	N/A	TRS.2.1 TDD	N/A
Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1	N/A	DLBWP.0.1 ULBWP.0.1	N/A
Active DL BWP configuration		1	DLBWP.1.1	N/A	DLBWP.1.1	N/A
Active UL BWP configuration		1	ULBWP.1.1	N/A	ULBWP.1.1	N/A
PRS configuration		1	PRS.1.1 FR2	PRS.1.1 FR2	PRS.1.2 FR2	PRS.1.2 FR2
PRS Resource slot offset	slot	1	0	4	0	4
SRS configuration		1	POS-SRS.3	N/A	POS-SRS.3	N/A
N_{oc} Note 2	dBm/SCS	1	-89		-89	
N_{oc} Note 2	dBm/15 kHz	1	-98		-98	
PRS $\hat{E}_s/I_{ot}$	dB	1	-5.33	-12.19	-5.33	-12.19
PRS $\hat{E}_s/N_{oc}$	dB	1	-5	-11	-5	-11
PRP Note 3	dBm/SCS kHz	1	-94	-100	-94	-100
Io	dBm/95.04 MHz	1	-58.57	-58.57	-58.57	-58.57
Propagation Condition		1	AWGN		AWGN	

Note 1: Void.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: PRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: PRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 8: GP#24 is configured if UE supports MG#24, otherwise GP#13 is configured.

A.7.7.12.3.3 Test requirements

The relative accuracy is derived by the difference of the UE Rx-Tx measurements on the two cells.

The UE Rx-Tx time difference measurements for Cell 1 and Cell 2 fulfil the relative UE Rx-Tx measurement accuracy requirements specified in clause 10.1.25.x.

A.7.7.13 PRS-RSRPP measurements

A.7.7.13.1 SA measurement accuracy with PRS in FR2

A.7.7.13.1.1 Test Purpose and Environment

The purpose of this test is to verify that the accuracy of PRS-RSRPP measurement in RRC_CONNECTED is within the specified limits. This test will verify the requirements in clauses 10.1.24.X.y and 10.1.24.X.z.

A.7.7.13.1.2 Test parameters

In this set of test cases all cells are on the same carrier frequency. Supported test configurations are shown in Table A.7.7.13.1.2-1. Both absolute and relative accuracy of PRS-RSRPP measurements are tested by using the parameters in Table A.7.7.131.2-2 and A.7.7.13.1.2-3. In all test cases, Cell 1 is the PCell. The TCI status for Cell 1 is defined in Table A.3.16.2-1 and TRS configuration for Cell 1 is defined in Table A.3.17.2.1-1.

Table A.7.7.13.1.2-1: PRS-RSRPP supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.7.13.1.2-2: PRS-RSRPP general test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
Cell ID		489	0	489	0
SSB ARFCN		freq1		freq1	
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 24		100: $N_{RB,c}$ = 24	
Downlink initial BWP configuration		DLBWP.0.1	-	DLBWP.0.1	-
Downlink dedicated BWP configuration		DLBWP.1.1	-	DLBWP.1.1	-
Uplink initial BWP configuration		ULBWP.0.1	-	ULBWP.0.1	-
Uplink dedicated BWP configuration		ULBWP.1.1	-	ULBWP.1.1	-
DRX cycle configuration		Not applicable	-	Not applicable	-
Measurement gap		GP#13 or GP#24 Note2			
TRS configuration		TRS.2.1 TDD	-	TRS.2.1 TDD	-
TCI state		TCI.State.0	-	TCI.State.0	-
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-
Control channel RMC		CCR.3.1 TDD	-	CCR.3.1 TDD	-
OCNG Patterns		OP.3	OP.3	OP.3	OP.3
SSB configuration		SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
SMTC configuration		SMTC.1	SMTC.1	SMTC.1	SMTC.1
Time offset with Cell 1	µs	-	3	-	3
PRS configuration		PRS.1.3 FR2	PRS.1.3 FR2	PRS.1.4 FR2	PRS.1.4 FR2
PRS Resource slot offset	slot	0	4	0	4
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0	0

EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
Propagation conditions		Two-tap channel defined in 38.101-4 Annex B.2.4, a = 1, $\tau_d = 0.45$ µs and $f_D = 5$ Hz			
Antenna configuration		1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: GP#24 is configured if UE supports MG#24, otherwise GP#13 is configured.					

Table A.7.7.13.1.2-3: PRS-RSRPP OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1			
Assumption for UE beams Note 7		Rough		Rough	
N_{oc} Note1	dBm/15kHz Note4	-91.6		Test 1	
N_{oc} Note1	dBm/SCS Note4	-82.6		Test 1	
$\hat{E}_s / N_{oc}$	dB	6.0	1.0	6.0	1.0
E_S	dBm/SCS Note4	-	-	-	-
PRS_RP Note2	dBm/SCS	-76.6	-81.6	-76.6	-81.6
$\hat{E}_s / I_{ot}$ BB Note6	dB	2.44	-5.98	2.44	-5.98
Io Note2	dBm/95.04 MHz Note4	-50.05		-50.05	
Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: PRS_RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: Void Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone Note 5: Void Note 6: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4. Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation					

A.7.7.13.1.3 Test Requirements

In each test, the absolute PRS-RSRPP measurement for each cell shall fulfil the absolute accuracy requirement in clause 10.1.24.X.y if the reported PRS-RSRPP is in the range shown in table A.7.7.13.1.2-1. The relative PRS-RSRPP measurement between the two PRS resources within the same cell shall fulfil the relative accuracy requirement in clause 10.1.24.X.z.

Table A.7.7.13.1.3-1: PRS-RSRPP absolute accuracy test requirement

	Test requirement Notes1,2,3
Cell 1	PRS_RP1 -δ +G_{min} ≤ Reported RSRP(dBm) ≤ PRS_RP1 +δ +G_{max}
Cell 2	PRS_RP2 -δ +G_{min} ≤ Reported RSRP(dBm) ≤ PRS_RP2 +δ +G_{max}
Note 1:	PRS_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration.
Note 2:	δ is the RSRP absolute accuracy requirement from Table 10.1.24.2.1-2, selected according to the Io used in the test.
Note 3:	G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.6.1-1, selected according to the UE power class

A.7.7.13.2 SA measurement accuracy with reduced PRS samples in FR2

A.7.7.13.2.1 Test Purpose and Environment

The purpose of this test is to verify that the PRS-RSRPP measurement accuracy with N_{sample}= 1 in FR2 is within the specified limits. This test will verify the requirements in clauses [10.1.24.Z.1] and [10.1.24.Z.2].

The UE under test should support [*supportedDL-PRS-ProcessingSamples*], and the TE indicates the UE to perform positioning measurements with reduced number of samples. The PRS bandwidth is contained within the active BWP and the power difference between the serving cell SS-RSRP and neighbour cell PRS-RSRP is within [6] dB, so that N_{sample}= 1 is assumed.

A.7.7.13.2.2 Test parameters

In this set of test cases all cells are on the same carrier frequency. Supported test configurations are shown in Table A.7.7.13.2.2-1. Both absolute and relative accuracy of PRS-RSRPP measurements are tested by using the parameters in Table A.7.7.13.2.2-2 and A.7.7.13.2.2-3. In all test cases, Cell 1 is the PCell. The TCI status for Cell 1 is defined in Table A.3.16.2-1 and TRS configuration for Cell 1 is defined in Table A.3.17.2.1-1.

Table A.7.7.13.2.2-1: PRS-RSRPP supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.7.13.2.2-2: PRS-RSRPP general test parameters

Parameter	Unit	Test 1	
		Cell 1	Cell 2
Cell ID		489	0
SSB ARFCN		freq1	
Duplex mode		TDD	
TDD configuration		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 24	
Downlink initial BWP configuration		DLBWP.0.1	-
Downlink dedicated BWP configuration		DLBWP.1.1	-
Uplink initial BWP configuration		ULBWP.0.1	-
Uplink dedicated BWP configuration		ULBWP.1.1	-
DRX cycle configuration		Not applicable	-

Measurement gap		GP#13 or GP#24 Note2	
TRS configuration		TRS.2.1 TDD	-
TCI state		TCI.State.0	-
PDSCH Reference measurement channel		SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-
Control channel RMC		CCR.3.1 TDD	-
OCNG Patterns		OP.3	OP.3
SSB configuration		SSB.3 FR2	SSB.3 FR2
SMTC configuration		SMTC.1	SMTC.1
Time offset with Cell 1	µs	-	3
PRS configuration		PRS.1.4 FR2	PRS.1.4 FR2
PRS bandwidth		48 PRBs	48 PRBs
PRS Resource slot offset	slot	0	4
PDSCH/PDCCH subcarrier spacing	kHz	120	120
EPRE ratio of PSS to SSS	dB	0	0
EPRE ratio of PBCH_DMRS to SSS			
EPRE ratio of PBCH to PBCH_DMRS			
EPRE ratio of PDCCH_DMRS to SSS			
EPRE ratio of PDCCH to PDCCH_DMRS			
EPRE ratio of PDSCH_DMRS to SSS			
EPRE ratio of PDSCH to PDSCH_DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation conditions		[Two-tap channel] Note3	
Antenna configuration		1x2	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: GP#24 is configured if UE supports MG#24, otherwise GP#13 is configured.
Note 3: The two-tap channel model is defined in 38.101-4 Annex B.2.4 (a = 1, τ_d=0.45 µs and f_D=5 Hz).

Table A.7.7.13.2.2-3: PRS-RSRPP OTA related test parameters

Parameter	Unit	Test 1	
		Cell 1	Cell 2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1	
Assumption for UE beams Note 7		Rough	
N_{oc} Note1	dBm/15kHz Note4	-91.6	
N_{oc} Note1	dBm/SCS Note4	-82.6	
$\hat{E}_s / N_{oc}$	dB	6.0	1.0
E_s	dBm/SCS Note4	-	-
PRS_RP Note2	dBm/SCS	-76.6	-81.6
SS_RP Note2	dBm/SCS	-76.6	-81.6
$\hat{E}_s / I_{ot}$ BB Note6	dB	2.44	-5.98
Io Note2	dBm/95.04 MHz Note4	-50.05	

Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 2:	PRS_RP, SS_RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	Void
Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5:	Void
Note 6:	Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.

A.7.7.13.2.3 Test Requirements

In each test, the absolute PRS-RSRPP measurement for each cell shall fulfil the absolute accuracy requirement in clause [10.1.24.Z.1] if the reported PRS-RSRPP is in the range shown in table A.7.7.13.2.3-1. The relative PRS-RSRPP measurement between the two PRS resources within the same cell shall fulfil the relative accuracy requirement in clause [10.1.24.Z.2].

Table A.7.7.13.2.3-1: PRS-RSRPP absolute accuracy test requirement

	Test requirement Notes1,2,3
Cell 1	PRS_RP1 $-\delta + G_{min} \leq$ Reported RSRPP(dBm) $\leq$ PRS_RP1 $+\delta + G_{max}$
Cell 2	PRS_RP2 $-\delta + G_{min} \leq$ Reported RSRPP(dBm) $\leq$ PRS_RP2 $+\delta + G_{max}$
Note 1:	PRS_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration.
Note 2:	δ is the RSRP absolute accuracy requirement from Table [10.1.24.Z.1-2], selected according to the Io used in the test.
Note 3:	G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.6.1-1, selected according to the UE power class

A.7.8 Measurement procedure in RRC_INACTIVE

A.7.8.1 RSTD measurements

A.7.8.1.1 NR RSTD measurement reporting delay test case for single positioning frequency layer in FR2 SA in RRC_INACTIVE state

A.7.8.1.1.1 Test Purpose and Environment

The purpose of the test is to verify that the RSTD measurement meets the requirements specified in Clause 5.6.2.5 in an environment with AWGN propagation conditions in FR2 in standalone scenario when single positioning frequency layer is configured.

The supported test configurations are specified in Table A.7.8.1.1.1-1.

Table A.7.8.1.1.1-1: Supported test configurations for NR RSTD

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

In the test there are three synchronous cells: Cell 1, Cell 2 and Cell 3. Cell 1 is the reference as well as the PCell. Cell 2 and Cell 3 are the neighbour cells. All cells are on the same RF channel distributed in single positioning frequency layers.

The test consists of two consecutive time intervals, with duration of T1 and T2. During time duration T1, the UE shall be in RRC_CONNECTED state and shall not have any timing information of Cell 2 and Cell3. During T2 UE shall be in RRC_INACTIVE state and all cells transmit PRS resources within initial DL BWP of the UE and with the same numerology as the initial DL BWP.

Note: The information on when PRS is muted is conveyed to the UE using PRS muting information.

The *NR-DL-TDOA-ProvideAssistanceData* and *nr-DL-TDOA-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where ΔT = 50 ms is the maximum processing time of the *DL-TDOA assistance* data and location information request.

The beginning of the time interval T2 shall be aligned with the first DRX cycle containing a DL PRS resource(s).

The UE is configured with DRX cycle of 0.64s.

The general test parameters are listed in Table A.7.8.1.1.1-2, and cell specific test parameters are listed in Table Table A.7.8.1.1.1-3 and Table A.7.8.1.1.1-4.

Table A.7.8.1.1.1-2: General test parameters for RSTD measurement reporting delay

Parameter		Unit	Value	Comment
Reference cell			Cell 1	Reference cell is the cell in the DL-TDOA assistance data with respect to which the RSTD measurement is defined, as specified in TS 38.215 [4] and TS 37.355 [34]. The reference cell is the PCell in this test case.
Neighbor cells			Cell 2 and Cell 3	Cell 2 and Cell 3 appear at the first and second places in the neighbour cell list in the DL-TDOA assistance data.
$BW_{channel}$		MHz	100: $N_{RB,c}$ = 66	
SSB configuration	Config 1		SSB.2 FR2	
SMTC configuration	Config 1		SMTC.1	
PDSCH RMC configuration	Config 1		SR.1.1 FDD	
RMSI CORESET RMC configuration	Config 1		CR.3.1 TDD	As specified in clause A.3.1.2.1
Dedicated CORESET RMC configuration	Config 1		CR.1.1 FDD	
PRS Configuration	Config 1		PRS.1.4. FR2	As specified in clause A.3.31
Physical cell ID PCI			(PCI of Cell 1 – PCI of Cell 2)mod6=0 and (PCI of Cell 1 – PCI of Cell 3)mod6=0	The cell PCIs are selected such that the relative shifts of PRS patterns among cells are as given by the test parameters

CP length		Normal	
DRX	s	0.64	
Radio frame receive time offset between the cells at the UE antenna connector	µs	Cell 2 to Cell 1: 0 Cell 3 to Cell 1: 3	PRS are transmitted from synchronous cells
Expected RSTD	µs	Cell 2: 3 Cell 3: 3 Other neighbour cells: randomly between -3 and 3	The expected RSTD is what is expected at the receiver. The corresponding parameter in the DL-TDOA assistance data specified in TS 37.355 [34] is the expectedRSTD indicator
Expected RSTD uncertainty for all neighbour cells	µs	5	The corresponding parameter in the DL-TDOA assistance data specified in TS 37.355 [34] is the expectedRSTD-Uncertainty index
Number of cells provided in DL-TDOA assistance data		16	Including the reference cell
PRS muting info		Cell 1: '10' Cell 2: '01' Cell 3: '10'	Correponds to prs-MutingInfo defined in TS 37.355 [24]
PRS resource RE offset		Cell 1: 0 Cell 2: 0 Cell 3: 1	Cell 1 and Cell 3 are configured with different resource offsets
T1	s	3	The length of the time interval from the beginning of each test
T2	s	[1.28]	The length of the time interval that follows immediately after time interval T1
AoA setup		Setup 1	As defined in A.3.15.1
Beam assumption		Rough	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Table A.7.8.1.1.1-3: Cell-specific test parameters for RSTD measurement reporting delay during T1

Parameter		Unit	Cell 1	Cell 2	Cell 3
NR RF Channel Number			1	1	1
Positiong frequency layer			1	1	1
Correlation Matrix and Antenna Configuration			1x2 Low	1x2 Low	1x2 Low
OCNG patterns defined in A.3.2.1			OP.5 FDD	N/A	N/A
N_{oc} Note 3	Config 1	dBm/SCS	-89		
PRS $\hat{E}_s/N_{oc}$		dB	-Infinity	-Infinity	-Infinity
Io Note 4	Config 1	dBm/ 95.04MHz	-58.86	-60.01	-60.01
SSB RP Note4	Config 1	dBm/SCS	-89	-Infinity	-Infinity

$\hat{E}_s/N_{oc}$		dB	0	-Infinity	-Infinity
Propagation Condition			AWGN		

Note 1: OCNG shall be used such that active cell (Cell 1) is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The resources for uplink transmission are assigned after the end of time period T2 to UEs that do not support SDT for measurement reporting.
Note 3: Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 4: SSB RP and Io levels have been derived from other parameters and are given for information purpose. These are not settable test parameters.

Table A.7.8.1.1.1-4: Cell-specific test parameters for RSTD measurement reporting delay during T2

Parameter		Unit	Cell 1	Cell 2	Cell 3
			T2	T2	T2
RF Channel Number			1	1	1
Positiong frequency layer			1	1	1
Correlation Matrix and Antenna Configuration			1x2 Low	1x2 Low	1x2 Low
OCNG patterns defined in A.3.2.1			OP.1	OP.1	OP.1
PRACH configuration			FR2 PRACH configuration 1	FR2 PRACH configuration 1	FR2 PRACH configuration 1
N_{oc} Note 3	Config 1	dBm/SCS	-89	-89	-89
PRS $\hat{E}_s/N_{oc}$	Config 1	dB	-5.44	-11.67	-11.67
Io	Config 1	dBm/ 9.36MHz	-59.65	-59.92	-59.92
PRS $\hat{E}_s/I_{ot}$		dB	-6	-13	-13
Propagation Condition			AWGN		

Note 1: OCNG shall be used such that active cells (all, except Cell 3 in T3) are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols other than those in the slots with transmitted PRS.
Note 2: The resources for uplink transmission are assigned after the end of time period T2 to UEs that do not support SDT for measurement reporting.
Note 3: Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

A.7.8.1.1.2 Test Requirements

The RSTD measurement time fulfils the requirements specified in Clause 5.6.2.5.

The UE shall perform and report the RSTD measurements for Cell 2 and Cell 3 with respect to the reference cell in the DL-TDOA assistance data, Cell 1, within the time duration specified in section 5.6.2.5 starting from the beginning of time interval T2.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported RSTD measurement for each correct event shall be within the RSTD reporting range specified in Clause 10.1.23.3, i.e., between RSTD_0000000 and RSTD_1970049.

A.7.8.1.2 NR RSTD measurement reporting delay test case with reduced number of samples in RRC_INACTIVE, FR1 SA

A.7.8.1.2.1 Test Purpose and Environment

The purpose of the test is to verify that the RSTD measurement meets the requirements specified in Clause 5.6.2 in an environment with AWGN propagation conditions in FR2 in standalone scenario when single-sample measurements are requested by the LMF. This test is applicable to UEs that support [FG 14-2 PRS measurement for reduced sample in RRC_inactive state].

The supported test configurations are specified in Table A.7.8.1.2.1-1.

Table A.7.8.1.2.1-1: Supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

In the test there are three synchronous cells: Cell 1, Cell 2 and Cell 3. Cell 1 is the reference as well as the PCell. Cell 2 and Cell 3 are the neighbour cells. All 3 cells are on the same RF channel in FR2.

The test consists of two consecutive time intervals, with duration of T1 and T2. The UE shall be in RRC_CONNECTED state during T1 and in RRC_INACTIVE state during T2. During time duration T1, the UE shall not have any timing information of Cell 2 and Cell 3. All three cells transmit PRS during T2. PRS resources from all three cells are transmitted within the initial DL BWP of the UE and with the same numerology as the initial DL BWP.

Note: The information on when PRS is muted is conveyed to the UE using PRS muting information.

The beginning of the time interval T2 shall be aligned with the beginning of the first DRX cycle in RRC_INACTIVE.

The *NR-DL-TDOA-ProvideAssistanceData* and *nr-DL-TDOA-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where ΔT = 50 ms is the maximum processing time of the *DL-TDOA assistance* data and location information request.

The *nr-DL-TDOA-RequestLocationInformation* IE should indicate to the UE that single-sample measurements are requested, i.e. requestedDL-PRS-ProcessingSamples-r17 is set to m1.

The general test parameters are listed in Table A.7.8.1.2.1-2, and cell specific test parameters are listed in Table A.7.8.1.2.1-3 and A.7.8.1.2.1-4.

Table A.7.8.1.2.1-2: General test parameters for RSTD measurement reporting delay

Parameter	Unit	Value	Comment

Reference cell			Cell 1	Reference cell is the cell in the DL-TDOA assistance data with respect to which the RSTD measurement is defined, as specified in TS 38.215 [4] and TS 37.355 [34]. The reference cell is the PCell in this test case.
Neighbor cells			Cell 2 and Cell 3	Cell 2 and Cell 3 appear at the first and second places in the neighbour cell list in the DL-TDOA assistance data.
SSB configuration	Config 1		SSB.2 FR2	
SMTC configuration	Config 1		SMTC.1	
Initial BWP configuration	Config 1		DLBWP.0.1 ULBWP.0.1	
PDSCH RMC configuration	Config 1		SR.1.1 FDD	
RMSI CORESET RMC configuration	Config 1		CR.3.1 TDD	As specified in clause A.3.1.2.1
Dedicated CORESET RMC configuration	Config 1		CR.1.1 FDD	
PRS Configuration	Config 1		PRS.1.2 FR2	As specified in clause A.3.31. The number of PRS RBs is the same as for the channel BW.
PRS Resource slot offset	Config 1	slots	Cell 1, 2, 3: 0	
Physical cell ID PCI			(PCI of Cell 1 – PCI of Cell 2)mod6=0 and (PCI of Cell 1 – PCI of Cell 3)mod6=0	The cell PCIs are selected such that the relative shifts of PRS patterns among cells are as given by the test parameters
CP length			Normal	
DRX cycle length		s	0.64	
Radio frame receive time offset between the cells at the UE antenna connector		µs	Cell 2 to Cell 1: 0 Cell 3 to Cell 1: 3	PRS are transmitted from synchronous cells
Expected RSTD		µs	Cell 2: 3 Cell 3: 3 Other neighbour cells: randomly between -3 and 3	The expected RSTD is what is expected at the receiver. The corresponding parameter in the DL-TDOA assistance data specified in TS 37.355 [34] is the expectedRSTD indicator

Expected RSTD uncertainty for all neighbour cells	µs	5	The corresponding parameter in the DL-TDOA assistance data specified in TS 37.355 [34] is the expectedRSTD-Uncertainty index
Number of cells provided in DL-TDOA assistance data		16	Including the reference cell
PRS muting info		Cell 1: '10' Cell 2: '01' Cell 3: '10'	Correponds to prs-MutingInfo defined in TS 37.355 [24]
PRS resource RE offset		Cell 1: 0 Cell 2: 0 Cell 3: 1	Cell 1 and Cell 3 are configured with different resource offsets
T1	s	3	The length of the time interval from the beginning of each test
T2	s	[5]	The length of the time interval that follows immediately after time interval T1
AoA setup		Setup 1	As defined in A.3.15.1
Beam assumption		Rough	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Table A.7.8.1.2.1-3: Cell-specific test parameters for RSTD measurement reporting delay during T1

Parameter		Unit	Cell 1	Cell 2	Cell 3
NR RF Channel Number			1	1	1
Positiong frequency layer			1	1	1
Correlation Matrix and Antenna Configuration			1x2 Low	1x2 Low	1x2 Low
OCNG patterns defined in A.3.2.1			OP.1	N/A	N/A
N_{oc} Note 3	Config 1	dBm/SCS	-89		
PRS $\hat{E}_s/N_{oc}$		dB	-Infinity	-Infinity	-Infinity
Io Note 4	Config 1	dBm/ 95.04MHz	-57.01	-57.01	-57.01
SSB RP Note4	Config 1	dBm/SCS	-89	-Infinity	-Infinity
$\hat{E}_s/N_{oc}$		dB	0	-Infinity	-Infinity
Propagation Condition			AWGN		

Note 1: OCNG shall be used such that active cell (Cell 1) is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 3: Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 4: SSB RP and Io levels have been derived from other parameters and are given for information purpose. These are not settable test parameters.

Table A.7.8.1.2.1-4: Cell-specific test parameters for RSTD measurement reporting delay during T2

Parameter		Unit	Cell 1	Cell 2	Cell 3
			T2	T2	T2
RF Channel Number			1	1	1
Positiong frequency layer			1	1	1
Correlation Matrix and Antenna Configuration			1x2 Low	1x2 Low	1x2 Low
OCNG patterns defined in A.3.2.1			OP.1	OP.1	OP.1
PRACH configuration			FR2 PRACH configuration 1	FR2 PRACH configuration 1	FR2 PRACH configuration 1
N_{oc} Note 3	Config 1	dBm/SCS	-89	-89	-89
PRS $\hat{E}_s/N_{oc}$	Config 1	dB	0	-3	-3
Io Note 4	Config 1	dBm/ 95.04MHz	-56.03	-58.25	-56.03
PRS $\hat{E}_s/I_{ot}$		dB	0	-3	-3
Propagation Condition			AWGN		

Note 1: OCNG shall be used such that all active cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols, except for slots where PRS is transmitted by any of the cells.

Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 3: Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 4: Io levels apply only for symbols where PRS is transmitted.

A.7.8.1.2.2 Test Requirements

The RSTD measurement time fulfils the requirements specified in Clause 5.6.2.5.

The UE shall perform and report the RSTD measurements for Cell 2 and Cell 3 with respect to the reference cell in the DL-TDOA assistance data, Cell 1, within the time duration specified in section 5.6.2.5 starting from the beginning of time interval T2.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported RSTD measurement for each correct event shall be within the RSTD reporting range specified in Clause 10.1.23.3, i.e., between RSTD_0000000 and RSTD_1970049.

A.7.8.2 PRS-RSRP measurements

A.7.8.2.1 PRS-RSRP reporting delay test case for single positioning frequency layer in RRC_INACTIVE

A.7.8.2.1.1 Test Purpose and Environment

The purpose of the test is to verify the PRS RSRP measurement requirements specified in Clause 5.6.3.5 for single positioning frequency layer under AWGN propagation conditions in RRC_INACTIVE. Supported test configurations are shown in table A.7.8.2.1.1-1

There are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the PCell.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2. Both cells transmit PRS during T2.

During T1 UE is in RRC_CONNECTED, the *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message as defined in TS 37.355 shall be provided to the UE during T1. The last slot containing the two messages for the assistance data and location information request is denoted as #n. In the next DL slot after slot #n, UE is released into RRC_INACTIVE.

The beginning of the time interval T2 is the first PRS resource occasion occurring ΔT after the slot #n, where ΔT = 50 ms is the maximum processing time of the assistance data and location information request.

The test parameters are as given in table A.7.81. 2.1.1-2, and table A.7.8.2.1.1-3.

Table A.7.8.2.1.1-1: supported test configurations for PRS RSRP measurement for FR2-FR2

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.8.2.1.1-2: General test parameters for PRS RSRP measurement reporting delay

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
Active cell		Config 1	NR cell 1 (Pcell)	Cell 1 is the PCell and the DL-AoD reference cell in the positioning assistance data.
Neighbour cell		Config 1	NR cell 2	Cell 2 is a neighbour cell in the positioning assistance data.
SMTC parameters		Config 1	SMTC.1	As specified in clause A.3.11
SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
CP length		Config 1	Normal	
DRX		Config 1	0.64s	
Time offset between serving and neighbour cells		Config 1	3μs	Synchronous cells.
Expected RSTD	μs	Config 1	3	

Expected RSTD uncertainty	µs	Config 1	5	
T1	s	Config 1	5	
T2	s	Config 1	[41]	

Table A.7.8.2.1.1-3: Cell-specific test parameters for PRS RSRP measurement reporting delay

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1	Setup 1 as specified in clause A.3.15			
Beam Assumption Note 7			Config 1	Rough		Rough	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
Duplex mode			Config 1	TDD		TDD	
$BW_{channel}$		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP BW		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
Dedicated CORESET RMC configuration			Config 1	CCR.3.1 TDD		-	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120	
PRS configuration			Config 1	PRS.1.2 FR2		PRS.1.2 FR2	
PRS muting configuration			Config 1	'10'		'01'	
EPRE ratio of PSS to SSS			Config 1	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		dBm/15 kHz Note5		-102		-102	
N_{oc} Note2		dBm/SCS Note4	Config 1	-93		-93	
SS-RSRP Note 3		dBm/SCS Note5	Config 1	-89.7	-89.7	-Infinity	-86.7

PRS-RSRP Note 3	dBm/SCS Note5	Config 1	-Infinity	-96	-Infinity	-103
PRS $\hat{E}_s/I_{ot}$	dB	Config 1	-Infinity	-3	-Infinity	-10
PRS $\hat{E}_s/N_{oc}$	dB	Config 1	-Infinity	-3	-Infinity	-10
Io Note3	dBm/95.04 MHz Note5	Config 1	-58.56		-55.38	
Propagation Condition		Config 1	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP/PRS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.8.2.1.2 Test Requirements

The PRS RSRP measurement time fulfils the requirements specified in Clause 5.6.3.5.The UE shall perform and report the PRS RSRP measurements for Cell 2 with respect to the reference cell in the DL-AoD assistance data, Cell 1, within the time duration specified in section 5.6.3.5 starting from the beginning of time interval T2.

The rate of the correct events for the neighbour cell observed during repeated tests shall be at least 90%, where the reported PRS RSRP measurement for each correct event shall be within the PRS RSRP reporting range specified in Clause 10.1.24.3, i.e., between PRS RSRP_0 and PRS RSRP_126.

A.7.8.2.2 PRS-RSRP reporting delay test case with reduced number of samples in RRC_INACTIVE

A.7.8.2.2.1 Test purpose and Environment

The purpose of the test is to verify that the PRS-RSRP measurement meets the delay requirements specified in clause 5.6.3.5 in an environment with AWGN propagation conditions when single-sample measurements are requested by the LMF. This test is applicable to UEs that support [FG 14-2 PRS measurement for reduced sample in RRC_inactive state].

The supported test configurations are specified in Table A.7. 8.2.2.1-1.

Table A.7.8.2.2.1-1: Supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

In the test there are two synchronous cells: Cell 1 and Cell 2. Cell 1 is the reference as well as the PCell. Cell 2 is a neighbour cell. Both cells are on the same NR RF channel in FR2.

The test consists of two consecutive time intervals, with duration of T1 and T2. The UE shall be in RRC_CONNECTED state during T1 and in RRC_INACTIVE state during T2. During time duration T1, the UE shall not have any timing information of Cell 2. Both cells transmit PRS during T2. PRS resources from both cells are transmitted within the initial DL BWP of the UE and with the same numerology as the initial DL BWP.

The beginning of the time interval T2 shall be aligned with the beginning of the first DRX cycle in RRC_INACTIVE.

The *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message as defined in TS 37.355 shall be provided to the UE during T1. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where ΔT = 50 ms is the maximum processing time of the *DL-AoD assistance* data and location information request.

The *nr-DL-AoD-RequestLocationInformation* IE should indicate to the UE that single-sample measurements are requested, i.e. requestedDL-PRS-ProcessingSamples-r17 is set to m1.

The general test parameters are listed in Table A.7.8.2.2.1-2, and cell specific test parameters are listed in Table A.7.8.2.2.1-3.

Table A.7.8.2.2.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
Active cell		Config 1	NR cell 1 (Pcell)	Cell 1 is the PCell and the DL-AoD reference cell in the positioning assistance data.
Neighbour cell		Config 1	NR cell 2	Cell 2 is a neighbour cell in the positioning assistance data.
SMTC parameters		Config 1	SMTC.1	As specified in clause A.3.11
SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
A3-Offset	dB	Config 1	-6	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX cycle length	s	Config 1	0.64	
Time offset between serving and neighbour cells		Config 1	3μs	Synchronous cells.
Expected RSTD	μs	Config 1	3	
Expected RSTD uncertainty	μs	Config 1	5	
T1	s	Config 1	3	
T2	s	Config 1	[5]	

Table A.7.8.2.2.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2

AoA setup			Config 1	Setup 1 as specified in clause A.3.15			
Beam Assumption[Note 7]			Config 1	Rough		Rough	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
Duplex mode			Config 1	TDD		TDD	
$BW_{channel}$		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP BW		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
Dedicated CORESET RMC configuration			Config 1	CCR.3.1 TDD		-	
TRS configuration			Config 1	TRS.2.1 TDD		-	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120	
PRS configuration[Note8]			Config 1	PRS.1.2 FR2		PRS.1.2 FR2	
PRS Resource slot offset		slots	Config 1	0		0	
PRS muting configuration			Config 1	'10'		'01'	
EPRE ratio of PSS to SSS			Config 1	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} [Note2]		dBm/15 kHz Note5		-98		-98	
N_{oc} [Note2]		dBm/SCS Note4	Config 1	-89		-89	
SS-RSRP [Note 3]		dBm/SCS Note5	Config 1	-89	-89	-89	-89
PRS-RSRP [Note 3]		dBm/SCS Note5	Config 1	-Infinity	-89	-Infinity	-92
PRS $\hat{E}_s / I_{ot}$		dB	Config 1	-Infinity	0	-Infinity	-3
PRS $\hat{E}_s / N_{oc}$		dB	Config 1	-Infinity	0	-Infinity	-3
Io[Note3]		dBm/95.04 MHz Note5	Config 1	N/A	-57.01	N/A	-58.25

Propagation Condition		Config 1	AWGN
Note 1:	OCNG shall be used such that all active cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols, except for slots where PRS is transmitted by any of the cells.		
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.		
Note 3:	SS-RSRP/PRS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Io levels apply only for symbols where PRS is transmitted.		
Note 4:	PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.		
Note 5:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone		
Note 6:	As observed with 0 dBi gain antenna at the centre of the quiet zone		
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation		
Note 8:	The number of PRS RBs is the same as for the channel BW.		

A.7.8.2.2.2 Test Requirements

The UE shall perform and report the PRS-RSRP measurements for Cell 1 and Cell 2, within the time limit specified in clause 5.6.3.5, starting from the beginning of time interval T2.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.8.3 UE Rx-Tx time difference measurements

A.7.8.3.1 UE Rx-Tx time difference measurements for single positioning frequency layer in FR2 SA

A.7.8.3.1.1 Test purpose and environment

The purpose of the test is to verify that the UE Rx-Tx measurement in RRC_INACTIVE state meets the requirements specified in clause 5.6.4 in AWGN propagation condition in FR2 in standalone scenario when single positioning frequency layer is configured.

The supported test configurations in listed in Table A.7.8.3.1.1-1.

Table A.7.8.3.1.1-1: Supported test configurations

Config	Description
1	120 kHz SSB and PRS SCS, 100 MHz bandwidth, TDD duplex mode

There are two cells in the test: PCell (Cell 1) and a neighbour cell (Cell 2). Both cells are on the same RF channel in FR2.

The test consists of two consecutive time intervals, with duration of T1 and T2. Cell 1 and Cell 2 mute PRS transmission during T1 and transmit PRS during T2.

The *NR-Multi-RTT-ProvideAssistanceData* and *nr-Multi-RTT-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last slot containing the two messages for the assistance data and location information request is denoted as #n. In the next DL slot after slot #n, UE is released into RRC_INACTIVE.

The beginning of the time interval T2 is the first PRS resource occasion occurring ΔT after the slot #n, where ΔT = 50 ms is the maximum processing time of the assistance data and location information request.

The UE is configured to transmit positioning SRS during T2.

The general test parameters and cell specific test parameters are as given in Table A.7.8.3.1.1-2 and Table A.7.8.3.1.1-3 respectively.

Table A.7.8.3.1.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Active cell		1	Cell 1	Cell 1 is the PCell in *NR-Multi-RTT-ProvideAssistanceData* [34].
Neighbour cell		1	Cell 2	Cell 2 is a neighbour cell in *NR-Multi-RTT-ProvideAssistanceData* [34].
RF Channel Number		1	1	For both Cell 1 and Cell 2
$BW_{channel}$	MHz	1	100: $N_{RB,c}$ = 66	
SSB configuration		1	SSB.2 FR2	
SMTC configuration		1	SMTC.1	
CP length		1	Normal	
DRX cycle		1	0.64s	
Time offset between serving and neighbour cells	µs	1	3	Synchronous cells
T1	s	1	5	
T2	s	1	20	

Table A.7.8.3.1.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1	Setup 1 as specified in clause A.3.15			
Beam Assumption[Note 7]		1	Rough		Rough	
TDD configuration		1	TDDConf.3.1		TDDConf.3.1	
PDSCH RMC configuration		1	SR.3.1 TDD		N/A	
RMSI CORESET RMC configuration		1	CR.3.1 TDD		N/A	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD		N/A	
OCNG Patterns		1	OP.1		OP.1	
EPRE ratio of PSS to SSS	dB	1	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS[Note 1]						
EPRE ratio of OCNG to OCNG DMRS[Note 1]						
EPRE ratio of PRS to SSS						

TRS Configuration		1	TRS.2.1 TDD		N/A	
Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1		N/A	
PRS configuration		1	PRS.1.1 FR2		PRS.1.1 FR2	
PRS muting info		1	'10'		'01'	
SRS configuration		1	POS-SRS.3		N/A	
N_{oc} Note 2	dBm/SCS	1	-89			
N_{oc} Note 2	dBm/15 kHz	1	-98			
PRS $\hat{E}_s/I_{ot}$	dB	1	-Infinity	-2.41	-Infinity	-12.12
PRS $\hat{E}_s/N_{oc}$	dB	1	-Infinity	-2	-Infinity	-10
PRP Note 3	dBm/SCS kHz	1	-Infinity	-91	-Infinity	-99
Io	dBm/95.04 MHz	1	N/A	-57.63	N/A	-57.63
Propagation Condition		1	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: PRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: PRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 8: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

A.7.8.3.1.2 Test requirements

The UE Rx-Tx time difference measurement time in RRC_INACTIVE state fulfils the requirements specified in clause 5.6.4.

The UE shall perform and report the UE Rx-Tx time difference measurements for Cell 1 and Cell 2 within the specified UE Rx-Tx time difference measurement time specified in clause 5.6.4 starting from the beginning of time interval T2.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported UE Rx-Tx measurement for each correct event shall be within the UE Rx-Tx reporting range specified in clause 10.1.25.3.1.

A.7.8.3.2 UE Rx-Tx time difference measurement with reduced number of samples in RRC_INACTIVE, FR2 SA

A.7.8.3.2.1 Test purpose and environment

The purpose of the test is to verify that the UE Rx-Tx measurement meets the requirements specified in clause 5.6.4.5 in AWGN propagation condition in FR2 in standalone scenario when single-sample measurements are requested by the LMF. This test is applicable to UEs that support [FG 14-2 PRS measurement for reduced sample in RRC_inactive state].

The supported test configurations in listed in Table A.7.8.3.2.1-1.

Table A.7.8.3.2.1-1: Supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

There are two cells in the test: PCell (Cell 1) and a neighbour cell (Cell 2). All cells are on the same RF channel in FR2.

The test consists of two consecutive time intervals, with duration of T1 and T2. The UE shall be in RRC_CONNECTED state during T1 and in RRC_INACTIVE state during T2. During time duration T1, the UE shall not have any timing information of Cell 2. Both cells transmit PRS during T2. PRS resources from both cells are transmitted within the initial DL BWP of the UE and with the same numerology as the initial DL BWP.

The beginning of the time interval T2 shall be aligned with the beginning of the first DRX cycle in RRC_INACTIVE.

The *NR-Multi-RTT-ProvideAssistanceData* and *nr-Multi-RTT-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where ΔT = 50 ms is the maximum processing time of the multi-RTT assistance data and location information request.

The *nr-Multi-RTT-RequestLocationInformation* IE should indicate to the UE that single-sample measurements are requested, i.e. requestedDL-PRS-ProcessingSamples-r17 is set to m1.

The UE is configured to transmit SRS during T2.

The general test parameters and cell specific test parameters are as given in Table A.7.8.3.2.1-2 and Table A.7.8.3.2.1-3 respectively.

Table A.7.8.3.2.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Active cell		1	Cell 1	Cell 1 is the PCell in NR-Multi-RTT-ProvideAssistanceData [34].
Neighbour cell		1	Cell 2	Cell 2 is a neighbour cell in NR-Multi-RTT-ProvideAssistanceData [34].
RF Channel Number		1	1	For both Cell 1 and Cell 2
$BW_{channel}$	MHz	1	100: $N_{RB,c}$ = 66	
SSB configuration		1	SSB.2 FR2	
SMTC configuration		1	SMTC.1	
CP length		1	Normal	
DRX cycle length	s	1	0.64	
Time offset between serving and neighbour cells	μs	1	3	Synchronous cells
T1	s	1	3	
T2	s	1	[5]	

Table A.7.8.3.2.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1	Setup 1 as specified in clause A.3.15			
Beam Assumption[Note 7]		1	Rough		Rough	

TDD configuration		1	TDDConf.3.1		TDDConf.3.1	
PDSCH RMC configuration		1	SR.3.1 TDD		N/A	
RMSI CORESET RMC configuration		1	CR.3.1 TDD		N/A	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD		N/A	
OCNG Patterns		1	OP.1		OP.1	
TRS Configuration		1	TRS.2.1 TDD		N/A	
Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1		N/A	
PRS configuration Note 9		1	PRS.1.2 FR2		PRS.1.2 FR2	
PRS Resource slot offset	slots	1	0		0	
PRS muting info		1	'10'		'01'	
SRS configuration		1	POS-SRS.3		N/A	
N_{oc} Note 2	dBm/SCS	1	-89			
N_{oc} Note 2	dBm/15 kHz	1	-98			
PRS $\hat{E}_s/I_{ot}$	dB	1	-Infinity	0	-Infinity	-3
PRS $\hat{E}_s/N_{oc}$	dB	1	-Infinity	0	-Infinity	-3
PRS-RSRP Note 3	dBm/SCS kHz	1	-Infinity	-89	-Infinity	-92
SS-RSRP Note 3	dBm/SCS kHz	1	-89	-89	-89	-92
Io	dBm/95.04 MHz	1	N/A	-57.01	N/A	-58.25
Propagation Condition		1	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP/PRS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Io levels apply only for symbols where PRS is transmitted.
Note 4: PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 8: OCNG shall be used such that all active cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols, except for slots where PRS is transmitted by any of the cells.
Note 9: The number of PRS RBs is the same as for the channel BW.

A.7.8.3.2.2 Test requirements

The UE Rx-Tx time difference measurement time fulfils the requirements specified in clause 5.6.4.5.

The UE shall perform and report the UE Rx-Tx time difference measurements for Cell 1 and Cell 2 within the specified UE Rx-Tx time difference measurement time starting from the beginning of time interval T2.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported UE Rx-Tx measurement for each correct event shall be within the UE Rx-Tx reporting range specified in clause 10.1.25.3.1.

A.7.8.4 PRS-RSRPP measurements

A.7.8.4.1 PRS-RSRPP reporting delay test case for single positioning frequency layer in FR2 in RRC_INACTIVE state

A.7.8.4.1.1 Test Purpose and Environment

The purpose of the test is to verify the PRS RSRPP measurement requirements specified in Clause 5.6.5.5 for single positioning frequency layer under AWGN propagation conditions in standalone scenario. Supported test configurations are shown in table A.7.8.4.1.1-1.

There are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the Pcell.

The test consists of two consecutive time intervals, with duration of T1 and T2. During time duration T1, the UE shall be in RRC_CONNECTED state and shall not have any timing information of Cell 2. During T2 UE shall be in RRC_INACTIVE state and both cells transmit PRS resources within initial DL BWP of the UE and with the same numerology as the initial DL BWP.

The *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message as defined in TS 37.355 shall be provided to the UE during T1. The last slot containing the two messages for the assistance data and location information request is denoted as #n.

The beginning of the time interval T2 shall be aligned with the beginning of the first DRX cycle containing the PRS resources that is ΔT after slot #n, where ΔT = 50 ms is the maximum processing time of the assistance data and location information request.

The test parameters are as given in table A.7.8.4.1.1-2, and table A.7.8.4.1.1-3.

Table A.7.8.4.1.1-1: supported test configurations for PRS RSRPP measurement for FR2

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.8.4.1.1-2: General test parameters for PRS RSRPP measurement reporting delay

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
Active cell		Config 1	NR cell 1 (Pcell)	Cell 1 is the PCell and the DL-AoD reference cell in the positioning assistance data.
Neighbour cell		Config 1	NR cell 2	Cell 2 is a neighbour cell in the positioning assistance data.
SMTC parameters		Config 1	SMTC.1	As specified in clause A.3.11
SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
A3-Offset	dB	Config 1	-6	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX	s	Config 1	0.64	ON

Time offset between serving and neighbour cells		Config 1	3μs	Synchronous cells.
Expected RSTD	μs	Config 1	3	
Expected RSTD uncertainty	μs	Config 1	5	
T1	s	Config 1	5	
T2	s	Config 1	7	

Table A.7.8.4.1.1-3: Cell-specific test parameters for PRS RSRPP measurement reporting delay

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1	Setup 1 as specified in clause A.3.15			
Beam Assumption[Note 7]			Config 1	Rough		Rough	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
Duplex mode			Config 1	TDD		TDD	
$BW_{channel}$		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP BW		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
Dedicated CORESET RMC configuration			Config 1	CCR.3.1 TDD		-	
TRS configuration			Config 1	TRS.2.1 TDD		-	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120	
PRS configuration			Config 1	PRS.1.4 FR2		PRS.1.4 FR2	
PRS muting configuration			Config 1	‘10’		‘01’	
EPRE ratio of PSS to SSS			Config 1	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							

N_{oc} Note2	dBm/15 kHz Note5		-102		-102	
N_{oc} Note2	dBm/SCS Note4	Config 1	-93		-93	
SS-RSRP Note 3	dBm/SCS Note5	Config 1	-89.7	-89.7	-Infinity	-86.7
PRS-RSRP Note 3	dBm/SCS Note5	Config 1	-Infinity	-96	-Infinity	-103
PRS $\hat{E}_s / I_{ot}$	dB	Config 1	-Infinity	-3	-Infinity	-10
PRS $\hat{E}_s / N_{oc}$	dB	Config 1	-Infinity	-3	-Infinity	-10
Io Note3	dBm/95.04 MHz Note5	Config 1	-58.56		-55.38	
Propagation Condition		Config 1	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols other than those in the slots with transmitted PRS.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP/PRS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone

Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone

Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.8.4.1.2 Test Requirements

The PRS RSRPP measurement time fulfils the requirements specified in Clause 5.6.5.5.The UE shall perform and report the PRS RSRPP measurements for Cell 2 with respect to the reference cell in the DL-AoD assistance data, Cell 1, within the time duration specified in section 5.6.5.5 starting from the beginning of time interval T2.

The rate of the correct events for the neighbour cell observed during repeated tests shall be at least 90%, where the reported PRS RSRPP measurement for each correct event shall be within the PRS RSRPP reporting range specified in Clause 10.1.X, i.e., between PRS RSRPP_0 and PRS RSRPP_126.

A.7.8.4.2 PRS-RSRPP reporting delay test with reduced number of samples for single positioning frequency layer in FR2 in RRC_INACTIVE state

A.7.8.4.2.1 Test Purpose and Environment

The purpose of the test is to verify the PRS RSRPP measurement requirements specified in Clause 5.6.5.5 for single positioning frequency layer under AWGN propagation conditions in standalone scenario for reduced number of samples. In this test UE that supports *supportedDL-PRS-ProcessingSamples* is configured by LMF to perform PRS measurement with reduced number of samples. Supported test configurations are shown in table A.7.8.4.2.1-1.

There are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the Pcell.

The test consists of two consecutive time intervals, with duration of T1 and T2. During time duration T1, the UE shall be in RRC_CONNECTED state and shall not have any timing information of Cell 2. During T2 UE shall be in RRC_INACTIVE state and both cells transmit PRS resources within initial DL BWP of the UE and with the same numerology as the initial DL BWP.

The *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message as defined in TS 37.355 shall be provided to the UE during T1. The last slot containing the two messages for the assistance data and location information request is denoted as #n.

The beginning of the time interval T2 shall be aligned with the beginning of the first DRX cycle containing the PRS resources that is ΔT after slot #n, where ΔT = 50 ms is the maximum processing time of the assistance data and location information request.

The test parameters are as given in table A.7.8.4.2.1-2, and table A.7.8.4.2.1-3.

Table A.7.8.4.2.1-1: supported test configurations for PRS RSRPP measurement for FR2

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.8.4.2.1-2: General test parameters for PRS RSRPP measurement reporting delay

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
Active cell		Config 1	NR cell 1 (Pcell)	Cell 1 is the PCell and the DL-AoD reference cell in the positioning assistance data.
Neighbour cell		Config 1	NR cell 2	Cell 2 is a neighbour cell in the positioning assistance data.
SMTC parameters		Config 1	SMTC.1	As specified in clause A.3.11
SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
A3-Offset	dB	Config 1	-6	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX	s	Config 1	0.64	ON
Time offset between serving and neighbour cells		Config 1	3μs	Synchronous cells.
Expected RSTD	μs	Config 1	3	
Expected RSTD uncertainty	μs	Config 1	5	
T1	s	Config 1	5	
T2	s	Config 1	7	

Table A.7.8.4.2.1-3: Cell-specific test parameters for PRS RSRPP measurement reporting delay

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1	Setup 1 as specified in clause A.3.15			
Beam Assumption Note 7			Config 1	Rough		Rough	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
Duplex mode			Config 1	TDD		TDD	
$BW_{channel}$		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP BW		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
Dedicated CORESET RMC configuration			Config 1	CCR.3.1 TDD		-	
TRS configuration			Config 1	TRS.2.1 TDD		-	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120	
PRS configuration			Config 1	PRS.1.4 FR2		PRS.1.4 FR2	
PRS BW			Config 1	48 PRBs		48 PRBs	
PRS muting configuration			Config 1	'10'		'01'	
EPRE ratio of PSS to SSS			Config 1	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		dBm/15 kHz Note5		-102		-102	
N_{oc} Note2		dBm/SCS Note4	Config 1	-93		-93	
SS-RSRP Note 3		dBm/SCS Note5	Config 1	-92.7	-92.7	-Infinity	-85.7
PRS-RSRP Note 3		dBm/SCS Note5	Config 1	-Infinity	-96	-Infinity	-89

PRS $\hat{E}_s/I_{ot}$	dB	Config 1	-Infinity	-3	-Infinity	4
PRS $\hat{E}_s/N_{oc}$	dB	Config 1	-Infinity	-3	-Infinity	4
Io[Note3]	dBm/95.04 MHz Note5	Config 1	-63.5		-61.9	
Propagation Condition		Config 1	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP/PRS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.8.4.2.2 Test Requirements

The PRS RSRPP measurement time fulfils the requirements specified in Clause 5.6.5.5. The UE shall perform and report the PRS RSRPP measurements for Cell 2 with respect to the reference cell in the DL-AoD assistance data, Cell 1, within the time duration specified in section 5.6.5.5 starting from the beginning of time interval T2.

The rate of the correct events for the neighbour cell observed during repeated tests shall be at least 90%, where the reported PRS RSRPP measurement for each correct event shall be within the PRS RSRPP reporting range specified in Clause 10.1.X, i.e., between PRS RSRPP_0 and PRS RSRPP_126.

A.7.9 Measurement performance requirements in RRC_INACTIVE

A.7.9.1 RSTD measurements

A.7.9.1.1 RSTD measurement accuracy test case for single positioning frequency layer in FR2 in RRC_INACTIVE state

A.7.9.1.1.1 Test purpose and Environment

The purpose of the test is to verify that the RSTD measurement in RRC_INACTIVE state meets the accuracy requirements specified in clause 10.1.23.2 in an environment with AWGN propagation conditions.

The supported test configurations are specified in Table A.7.9.1.1.1-1.

Table A.7.9.1.1.1-1: Supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

In the test there are two synchronous cells: Cell 1 and Cell 2. Cell 1 is the reference as well as the PCell. Cell 2 is a neighbour cells. Both cells are on the same NR RF channel in FR2. The UE is configured with DRX cycle of 0.64s. The *NR-TDOA-ProvideAssistanceData* and *NR-TDOA-RequestLocationInformation* message as defined in TS 37.355 shall be provided to the UE before the start of the test. The test duration should be larger than the UE measurement period as defined in clause 5.6.2.5.

Table A.7.9.1.1.1-2: RSTD accuracy test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
PRS ARFCN		freq1		freq1	
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Downlink initial BWP configuration		DLBWP.0.1	-	DLBWP.0.1	-
Uplink initial BWP configuration		ULBWP.0.1	-	ULBWP.0.1	-
Uplink dedicated BWP configuration		ULBWP.1.1	-	ULBWP.1.1	-
TRS configuration		TRS.2.1 TDD	-	TRS.2.1 TDD	-
TCI state		TCI.State.0	-	TCI.State.0	-
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-
Control channel RMC		CCR.3.1 TDD	-	CCR.3.1 TDD	-
OCNG Patterns		OP.3	OP.3	OP.3	OP.3
SSB configuration		SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
SMTC configuration		SMTC.1	SMTC.1	SMTC.1	SMTC.1
PRS configuration		PRS.1.1 FR2	PRS.1.1 FR2	PRS.1.2 FR2	PRS.1.2 FR2
PRS Resource slot offset	slot	0	4	0	4
Expected RSTD	µs	N/A	3	N/A	3
Expected RSTD uncertainty	µs	N/A	5	N/A	5
Time offset with Cell 1	µs	-	3	-	3
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
Propagation conditions		AWGN	AWGN	AWGN	AWGN
Antenna configuration		1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					

Table A.7.9.1.1.1-3: RSTD accuracy OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2

Angle of arrival configuration		Setup 1 according to clause A.3.15.1			
Assumption for UE beams[Note 5]		Rough		Rough	
N_{oc} [Note1]	dBm/SCS [Note3]	-98		-98	
$\hat{E}_s / N_{oc}$	dB	-6	-13	-6	-13
PRS-RSRP[Note2]	dBm/SCS	-104	-111	-104	-111
$\hat{E}_s / I_{ot}$ [Note4]	dB	-6	-13	-6	-13
Io[Note2]	dBm/95.04 MHz [Note3]	-68.04	-68.80	-68.04	-68.80

Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SSB_RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 4: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.
Note 5: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.9.1.1.2 Test Requirements

The RSTD measurement accuracy for Cell 2 shall fulfil the absolute requirement in clause 10.1.23.2.

A.7.9.1.2 RSTD measurement accuracy test case with reduced number of samples for single positioning frequency layer in FR2 in RRC_INACTIVE state

A.7.9.1.2.1 Test purpose and Environment

The purpose of the test is to verify that the RSTD measurement in RRC_INACTIVE state meets the accuracy requirements specified in clause 10.1.23.2 in an environment with AWGN propagation conditions. In this test UE that supports *supportedDL-PRS-ProcessingSamples* is configured by LMF to perform PRS measurement with reduced number of samples.

The supported test configurations are specified in Table A.7.9.1.2.1-1.

Table A.7.9.1.2.1-1: Supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

In the test there are two synchronous cells: Cell 1 and Cell 2. Cell 1 is the reference as well as the PCell. Cell 2 is a neighbour cells. Both cells are on the same NR RF channel in FR2. The UE is configured with DRX cycle of 0.64s. The *NR-TDOA-ProvideAssistanceData* and *NR-TDOA-RequestLocationInformation* message as defined in TS 37.355 shall be provided to the UE before the start of the test. The test duration should be larger than the UE measurement period as defined in clause 5.6.2.5.

Table A.7.9.1.2.1-2: RSTD accuracy test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
PRS ARFCN		freq1		freq1	
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Downlink initial BWP configuration		DLBWP.0.1	DLBWP.0.1	DLBWP.0.1	DLBWP.0.1
Uplink initial BWP configuration		ULBWP.0.1	-	ULBWP.0.1	-
Uplink dedicated BWP configuration		ULBWP.1.1	-	ULBWP.1.1	-
TRS configuration		TRS.2.1 TDD	-	TRS.2.1 TDD	-
TCI state		TCI.State.0	-	TCI.State.0	-
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-
Control channel RMC		CCR.3.1 TDD	-	CCR.3.1 TDD	-
OCNG Patterns		OP.3	OP.3	OP.3	OP.3
SSB configuration		SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
SMTC configuration		SMTC.1	SMTC.1	SMTC.1	SMTC.1
PRS configuration		PRS.1.4 FR2	PRS.1.4 FR2	PRS.1.4 FR2	PRS.1.4 FR2
PRS BW		48 PRBs			
PRS Resource slot offset	slot	0	4	0	4
Expected RSTD	µs	N/A	3	N/A	3
Expected RSTD uncertainty	µs	N/A	5	N/A	5
Time offset with Cell 1	µs	-	3	-	3
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
Propagation conditions		AWGN	AWGN	AWGN	AWGN
Antenna configuration		1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					

Table A.7.9.1.2.1-3: RSTD accuracy OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1			

A.7.9.1.2.2 Test Requirements

Assumption for UE beams Note 5		Rough		Rough	
N_{OC} Note1	dBm/SCS Note3	-98		-98	
$\hat{E}_s / N_{oc}$	dB	-3	4	-3	4
PRS-RSRP Note2	dBm/SCS	-101	-94	-101	-94
SS-RSRP Note2	dBm/SCS	-89.7	N/A	-89.7	N/A
$\hat{E}_s / I_{ot}$ BB Note4	dB	-3	4	-3	4
Io Note2	dBm/95.04 MHz Note3	-68.5	-66.9	-68.5	-66.9

Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SSB_RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 4: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.
Note 5: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

The RSTD measurement accuracy for Cell 2 shall fulfil the absolute requirement in clause 10.1.23.2.

A.7.9.2 PRS-RSRP measurements

A.7.9.2.1 SA measurement accuracy with PRS in FR2 in RRC_INACTIVE

A.7.9.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the PRS-RSRP measurement accuracy in RRC_INACTIVE is within the specified limits. This test will verify the requirements in clauses 10.1.24.2.1 and 10.1.24.2.2.

A.7.9.2.1.2 Test parameters

In this set of test cases all cells are on the same carrier frequency. Supported test configurations are shown in Table A.7.9.2.1.2-1. Both absolute and relative accuracy of PRS-RSRP measurements are tested by using the parameters in Table A.7.9.2.1.2-2 and A.7.9.2.1.2-3. In all test cases, Cell 1 is the PCell.

Table A.7.9.2.1.2-1: PRS-RSRP supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.9.2.1.2-2: PRS-RSRP general test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
Cell ID		489	0	489	0
SSB ARFCN		freq1		freq1	
Duplex mode		TDD		TDD	

TDD configuration		TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 24		100: $N_{RB,c}$ = 24	
Downlink initial BWP configuration		DLBWP.0.1	-	DLBWP.0.1	-
Uplink initial BWP configuration		ULBWP.0.1	-	ULBWP.0.1	-
DRX cycle configuration		1.28s	-	1.28s	-
TCI state		TCI.State.0	-	TCI.State.0	-
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-
Control channel RMC		CCR.3.1 TDD	-	CCR.3.1 TDD	-
OCNG Patterns		OP.3	OP.3	OP.3	OP.3
SSB configuration		SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
SMTC configuration		SMTC.1	SMTC.1	SMTC.1	SMTC.1
Time offset with Cell 1	µs	-	3	-	3
PRS configuration		PRS.1.3 FR2	PRS.1.3 FR2	PRS.1.4 FR2	PRS.1.4 FR2
PRS Resource slot offset	slot	0	4	0	4
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
Propagation conditions		AWGN	AWGN	AWGN	AWGN
Antenna configuration		1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					

Table A.7.9.2.1.2-3: PRS-RSRP OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1			
Assumption for UE beams Note 7		Rough		Rough	
N_{oc} Note1	dBm/15kHz Note4	-91.6		Test 1	
N_{oc} Note1	dBm/SCS Note4	-82.6		Test 1	
$\hat{E}_s / N_{oc}$	dB	6.0	1.0	6.0	1.0
E_s	dBm/SCS Note4	-	-	-	-

PRS_RP Note2	dBm/SCS	-76.6	-81.6	-76.6	-81.6
$\hat{E}_s/I_{ot}$ BB Note6	dB	2.44	-5.98	2.44	-5.98
Io Note2	dBm/95.04 MHz Note4	-50.05		-50.05	

Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: PRS_RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: Void
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5: Void
Note 6: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.9.2.1.3 Test Requirements

In each test, the absolute PRS-RSRP measurement for each cell shall fulfil the absolute accuracy requirement in clause 10.1.24.2.1 if the reported PRS-RSRP is in the range shown in table A.7.9.2.1.3-1. The relative PRS-RSRP measurement between the two PRS resources within the same cell shall fulfil the relative accuracy requirement in clause 10.1.24.2.2.

Table A.7.9.2.1.3-1: PRS-RSRP absolute accuracy test requirement

	Test requirement Notes1,2,3
Cell 1	PRS_RP1 -δ +G_{min} ≤ Reported RSRP(dBm) ≤ PRS_RP1 +δ +G_{max}
Cell 2	PRS_RP2 -δ +G_{min} ≤ Reported RSRP(dBm) ≤ PRS_RP2 +δ +G_{max}

Note 1: PRS_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration.
Note 2: δ is the RSRP absolute accuracy requirement from Table 10.1.24.2.1-2, selected according to the Io used in the test.
Note 3: G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.6.1-1, selected according to the UE power class

A.7.9.2.2 PRS-RSRP measurements with reduced number of sample in RRC_INACTIVE

A.7.9.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the PRS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1.24.2.1 and 10.1.24.2.2.

A.7.9.2.2.2 Test parameters

In this set of test cases all cells are on the same carrier frequency. Supported test configurations are shown in Table A.7.9.2.2.2-1. Both absolute and relative accuracy of PRS-RSRP measurements are tested by using the parameters in Table A.7.9.2.2.2-2 and A.7.9.2.2.2-3. In all test cases, Cell 1 is the PCell. The TCI status for Cell 1 is defined in Table A.3.16.2-1 and TRS configuration for Cell 1 is defined in Table A.7.9.2.2.2-1.

Table A.7.9.2.2.2-1: PRS-RSRP supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.9.2.2.2-2: PRS-RSRP general test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
Cell ID		489	0	489	0
SSB ARFCN		freq1		freq1	
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Downlink initial BWP configuration		DLBWP.0.1	-	DLBWP.0.1	-
Uplink initial BWP configuration		ULBWP.0.1	-	ULBWP.0.1	-
DRX cycle configuration	s	0.64			
TRS configuration		TRS.2.1 TDD	-	TRS.2.1 TDD	-
TCI state		TCI.State.0	-	TCI.State.0	-
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-
Control channel RMC		CCR.3.1 TDD	-	CCR.3.1 TDD	-
OCNG Patterns		OP.3	OP.3	OP.3	OP.3
SSB configuration		SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
SMTC configuration		SMTC.1	SMTC.1	SMTC.1	SMTC.1
Time offset with Cell 1	μs	-	3	-	3
PRS configuration		PRS.1.1 FR2	PRS.1.1 FR2	PRS.1.1 FR2	PRS.1.1 FR2
PRS BW		48 PRBs	48 PRBs	48 PRBs	48 PRBs
PRS Resource slot offset	slot	0	4	0	4
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
EPRE ratio of PRS to SSS					
Propagation conditions		AWGN	AWGN	AWGN	AWGN
Antenna configuration		1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					

Table A.7.9.2.2.2-3: PRS-RSRP OTA related test parameters

Parameter	Unit	Test 1	Test 2

		Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1			
Assumption for UE beams Note 7		Rough		Rough	
N_{oc} Note1	dBm/15kHz Note4	-98		Test 1	
N_{oc} Note1	dBm/SCS Note4	-89		Test 1	
$\hat{E}_s / N_{oc}$	dB	-1.44	-3.65	-1.44	-3.65
E_s	dBm/SCS Note4	-	-	-	-
PRS_RP Note2	dBm/SCS	-90.44	-92.65	-90.44	-92.65
$\hat{E}_s / I_{ot\ BB}$ Note6	dB	-3	-6	-3	-6
Io Note2	dBm/95.04 MHz Note4	-56.65		-56.65	

Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: PRS_RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: Void
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5: Void
Note 6: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.9.2.2.3 Test Requirements

In each test, the absolute PRS-RSRP measurement for each cell shall fulfil the absolute accuracy requirement in clause 10.1.24.2.1 if the reported PRS-RSRP is in the range shown in table A.7.9.2.2.3-1. The relative PRS-RSRP measurement between the two PRS resources within the same cell shall fulfil the relative accuracy requirement in clause 10.1.24.2.2.

Table A.7.9.2.2.3-1: PRS-RSRP absolute accuracy test requirement

	Test requirement Notes1,2,3
Cell 1	PRS_RP1 -δ +G_{min} ≤ Reported RSRP(dBm) ≤ PRS_RP1 +δ +G_{max}
Cell 2	PRS_RP2 -δ +G_{min} ≤ Reported RSRP(dBm) ≤ PRS_RP2 +δ +G_{max}

Note 1: PRS_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration.
Note 2: δ is the RSRP absolute accuracy requirement from Table 10.1.24.2.1-2, selected according to the Io used in the test.
Note 3: G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.6.1-1, selected according to the UE power class

A.7.9.3 UE Rx-Tx time difference measurements

A.7.9.3.1 UE Rx-Tx time difference measurements in RRC_INACTIVE

A.7.9.3.1.1 Test purpose and environment

The purpose of the test is to verify that the UE Rx-Tx time difference measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.25.2. The test is conducted in AWGN propagation condition in FR2 in standalone scenario.

The supported test configuration is listed in Table A.7.9.3.1.1-1.

Table A.7.9.3.1.1-1: Supported test configurations

Config	Description
1	120 kHz SSB and PRS SCS, 100 MHz bandwidth, TDD duplex mode

There are two cells in the test: PCell (Cell 1) and a neighbour cell (Cell 2). All cells are on the same RF channel in FR2.

The *NR-Multi-RTT-ProvideAssistanceData* and *nr-Multi-RTT-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE before the start of the test.

The UE is configured to transmit SRS on Cell 1 during the test.

The test equipment measures the transmit timing of the UE using the transmitted SRS and measures the receive timing using the PRS. The test equipment then compares the difference of these two timings to the UE Rx-Tx measurement reported by the UE for each cell.

A.7.9.3.1.2 Test parameters

The UE Rx-Tx time difference accuracy test parameters are given in Table A.7.9.3.1.2-1.

Table A.7.9.3.1.2-1: UE Rx-Tx time difference measurement accuracy test parameters

Parameter	Unit	Test configuration	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
AoA setup		1	Setup 1 as specified in clause A.3.15		Setup 1 as specified in clause A.3.15	
Beam Assumption[Note 7]		1	Rough	Rough	Rough	Rough
DRX	s	1	0.64		0.64	
Time offset with Cell 1	μs	1	N/A	3	N/A	3
TDD configuration		1	TDDConf.3.1	TDDConf.3.1	TDDConf.3.1	TDDConf.3.1
PDSCH RMC configuration		1	SR.3.1 TDD	N/A	SR.3.1 TDD	N/A
RMSI CORESET RMC configuration		1	CR.3.1 TDD	N/A	CR.3.1 TDD	N/A
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD	N/A	CCR.3.1 TDD	N/A
OCNG Patterns		1	OP.1	OP.1	OP.1	OP.1

Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1	N/A	DLBWP.0.1 ULBWP.0.1	N/A
PRS configuration		1	PRS.1.1 FR2	PRS.1.1 FR2	PRS.1.1 FR2	PRS.1.1 FR2
PRS Resource slot offset	slot	1	0	4	0	4
SRS configuration		1	POS-SRS.3	N/A	POS-SRS.3	N/A
N_{oc} Note 2	dBm/SCS	1	-89		-89	
N_{oc} Note 2	dBm/15 kHz	1	-98		-98	
PRS $\hat{E}_s/I_{ot}$	dB	1	-2.41	-12.12	-2.41	-12.12
PRS $\hat{E}_s/N_{oc}$	dB	1	-2	-10	-2	-10
PRS-RSRP Note 3	dBm/SCS kHz	1	-91	-99	-91	-99
Io	dBm/95.04 MHz	1	-57.63	-57.63	-57.63	-57.63
Propagation Condition		1	AWGN		AWGN	

Note 1: Void.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: PRS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.9.3.1.3 Test requirements

The UE Rx-Tx time difference measurement time fulfils the UE Rx-Tx measurement accuracy requirements specified in clause 10.1.25.2 for both Cell 1 and Cell 2.

A.7.9.3.2 UE Rx-Tx time difference measurement accuracy with reduced number of samples in FR2 SA

A.7.9.3.2.1 Test purpose and environment

The purpose of the test is to verify that the UE Rx-Tx time difference measurement accuracy with reduced number of samples in RRC_INACTIVE state is within the specified limits. This test will verify the requirements in clause 10.1.25.2. The test is conducted in AWGN propagation condition in FR2 in standalone scenario when single positioning frequency layer is configured.

The supported test configuration is listed in Table A.7.9.3.2.1-1.

Table A.7.9.3.2.1-1: Supported test configurations

Config	Description
1	120 kHz SSB and PRS SCS, 100 MHz bandwidth, TDD duplex mode

There are two cells in the test: PCell (Cell 1) and a neighbour cell (Cell 2). Both cells are on the same RF channel in FR2.

The *NR-Multi-RTT-ProvideAssistanceData* and *nr-Multi-RTT-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE before the start of the test. The UE is configured to measure UE Rx-Tx time difference using reduced number of samples via *requestedDL-PRS-ProcessingSamples* in *NR-Multi-RTT-RequestLocationInformation*.

UE shall be configured to enter into RRC_INACTIVE state before the start of the test.

The UE is configured to transmit positioning SRS on Cell 1 during the test.

The test equipment measures the transmit timing of the UE using the transmitted SRS and measures the receive timing using the PRS. The test equipment then compares the difference of these two timings to the UE Rx-Tx measurement reported by the UE for each cell.

A.7.9.3.2.2 Test parameters

The UE Rx-Tx time difference accuracy test parameters are given in Table A.7.9.3.2.2-1.

Table A.7.9.3.2.2-1: UE Rx-Tx time difference measurement accuracy test parameters

Parameter	Unit	Test configuration	Test 1	
			Cell 1	Cell 2
AoA setup		1	Setup 1 as specified in clause A.3.15	
Beam Assumption[Note 7]		1	Rough	Rough
DRX cycle		1	0.64s	
Time offset with Cell 1	μs	1	N/A	3
TDD configuration		1	TDDConf.3.1	TDDConf.3.1
PDSCH RMC configuration		1	SR.3.1 TDD	N/A
RMSI CORESET RMC configuration		1	CR.3.1 TDD	N/A
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD	N/A
OCNG Patterns		1	OP.1	OP.1
EPRE ratio of PSS to SSS	dB	1	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS[Note 1]				
EPRE ratio of OCNG to OCNG DMRS [Note 1]				
EPRE ratio of PRS to SSS				

TRS Configuration		1	TRS.2.1 TDD	N/A
Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1	N/A
PRS configuration		1	PRS.1.1 FR2	PRS.1.1 FR2
PRS BW		1	48 PRBs	48 PRBs
PRS Resource slot offset	slot	1	0	4
SRS configuration		1	POS-SRS.3	N/A
N_{oc} Note 2	dBm/SCS	1	-89	
N_{oc} Note 2	dBm/15 kHz	1	-98	
PRS $\hat{E}_s/I_{ot}$	dB	1	-1.76	-6.01
PRS $\hat{E}_s/N_{oc}$	dB	1	0	-3
PRP Note 3	dBm/SCS kHz	1	-89	-92
Io	dBm/95.04 MHz	1	-56.03	-56.03
Propagation Condition		1	AWGN	

Note 1: Void.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: PRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: PRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.9.3.2.3 Test requirements

The UE Rx-Tx time difference measurement with reduced number of samples in RRC_INACTIVE state fulfils the UE Rx-Tx measurement accuracy requirements specified in clause 10.1.25.2 for both Cell 1 and Cell 2.

A.7.9.4 PRS-RSRPP measurements

A.7.9.4.1 SA measurement accuracy in FR2 in RRC INACTIVE

A.7.9.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that the PRS-RSRPP measurement accuracy in RRC_INACTIVE state is within the specified limits. This test will verify the requirements in clauses [10.1.24.Z.1] and [10.1.24.Z.2].

A.7.9.4.1.2 Test parameters

In this set of test cases all cells are on the same carrier frequency. Supported test configurations are shown in Table A.7.9.4.1.2-1. Both absolute and relative accuracy of PRS-RSRPP measurements are tested by using the parameters in Table A.7.9.4.1.2-2 and A.7.9.4.1.2-3. In all test cases, Cell 1 is the PCell. The TCI status for Cell 1 is defined in Table A.3.16.2-1 and TRS configuration for Cell 1 is defined in Table A.7.9.4.1.2-1.

Table A.7.9.4.1.2-1: PRS-RSRPP supported test configurations

Configuration	Description

1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.9.4.1.2-2: PRS-RSRPP general test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
Cell ID		489	0	489	0
SSB ARFCN		freq1		freq1	
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 24		100: $N_{RB,c}$ = 24	
Downlink initial BWP configuration		DLBWP.0.1	-	DLBWP.0.1	-
Uplink initial BWP configuration		ULBWP.0.1	-	ULBWP.0.1	-
DRX cycle configuration	ms	640			
TRS configuration		TRS.2.1 TDD	-	TRS.2.1 TDD	-
TCI state		TCI.State.0	-	TCI.State.0	-
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-
Control channel RMC		CCR.3.1 TDD	-	CCR.3.1 TDD	-
OCNG Patterns		OP.3	OP.3	OP.3	OP.3
SSB configuration		SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
SMTC configuration		SMTC.1	SMTC.1	SMTC.1	SMTC.1
Time offset with Cell 1	µs	-	3	-	3
PRS configuration		PRS.1.3 FR2	PRS.1.3 FR2	PRS.1.4 FR2	PRS.1.4 FR2
PRS Resource slot offset	slot	0	4	0	4
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
Propagation conditions		[Two-tap channel] Note 2			
Antenna configuration		1x2			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The two-tap channel model is defined in 38.101-4 Annex B.2.4 (a = 1, τ_d=0.45 µs and f_D=5 Hz).

Table A.7.9.4.1.2-3: PRS-RSRPP OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2

Angle of arrival configuration		Setup 1 according to clause A.3.15.1			
Assumption for UE beams Note 7		Rough		Rough	
N_{oc} Note1	dBm/15kHz Note4	-91.6		Test 1	
N_{oc} Note1	dBm/SCS Note4	-82.6		Test 1	
$\hat{E}_s / N_{oc}$	dB	6.0	1.0	6.0	1.0
E_S	dBm/SCS Note4	-	-	-	-
PRS_RP Note2	dBm/SCS	-76.6	-81.6	-76.6	-81.6
$\hat{E}_s / I_{ot\ BB}$ Note6	dB	2.44	-5.98	2.44	-5.98
Io Note2	dBm/95.04 MHz Note4	-50.05		-50.05	

Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: PRS_RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: Void
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5: Void
Note 6: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.9.4.1.3 Test Requirements

In each test, the absolute PRS-RSRPP measurement for each cell shall fulfil the absolute accuracy requirement in clause [10.1.24.Z.1]. if the reported PRS-RSRPP is in the range shown in table A.7.9.4.1.3-1. The relative PRS-RSRPP measurement between the two PRS resources within the same cell shall fulfil the relative accuracy requirement in clause [10.1.24.Z.2].

Table A.7.9.4.1.3-1: PRS-RSRPP absolute accuracy test requirement

	Test requirement Notes1,2,3
Cell 1	PRS_RP1 -δ +G_{min} ≤ Reported RSRPP(dBm) ≤ PRS_RP1 +δ +G_{max}
Cell 2	PRS_RP2 -δ +G_{min} ≤ Reported RSRPP(dBm) ≤ PRS_RP2 +δ +G_{max}

Note 1: PRS_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration.
Note 2: δ is the RSRP absolute accuracy requirement from Table [10.1.24.Z.1-2], selected according to the Io used in the test.
Note 3: G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.6.1-1, selected according to the UE power class

A.7.9.4.2 SA measurement accuracy with reduced PRS samples in FR2 in RRC INACTIVE

A.7.9.4.2.1 Test Purpose and Environment

The purpose of this test is to verify that the PRS-RSRPP measurement accuracy with N_{sample}= 1 in FR2in RRC_INACTIVE state is within the specified limits. This test will verify the requirements in clauses [10.1.24.Z.1] and [10.1.24.Z.2].The UE under test should support [*supportedDL-PRS-ProcessingSamples-RRC-Inactive*], and the TE indicates the UE to perform positioning measurements with reduced number of samples. The PRS bandwidth is

contained within the initial DL BWP and the power difference between the serving cell SS-RSRP and neighbour cell PRS-RSRP is within [6]dB, so that N_{sample}= 1 is assumed.

A.7.9.4.2.2 Test parameters

In this set of test cases all cells are on the same carrier frequency. Supported test configurations are shown in Table A.7.9.4.2.2-1. Both absolute and relative accuracy of PRS-RSRPP measurements are tested by using the parameters in Table A.7.9.4.2.2-2 and A.7.9.4.2.2-3. In all test cases, Cell 1 is the PCell. The TCI status for Cell 1 is defined in Table A.3.16.2-1 and TRS configuration for Cell 1 is defined in Table A.3.17.2.1-1.

Table A.7.9.4.2.2-1: PRS-RSRPP supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.9.4.2.2-2: PRS-RSRPP general test parameters

Parameter	Unit	Test 1	
		Cell 1	Cell 2
Cell ID		489	0
SSB ARFCN		freq1	
Duplex mode		TDD	
TDD configuration		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 24	
Downlink initial BWP configuration		DLBWP.0.1	-
Uplink initial BWP configuration		ULBWP.0.1	-
DRX cycle configuration	ms	640	
TRS configuration		TRS.2.1 TDD	-
TCI state		TCI.State.0	-
PDSCH Reference measurement channel		SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-
Control channel RMC		CCR.3.1 TDD	-
OCNG Patterns		OP.3	OP.3
SSB configuration		SSB.3 FR2	SSB.3 FR2
SMTC configuration		SMTC.1	SMTC.1
Time offset with Cell 1	µs	-	3
PRS configuration		PRS.1.4 FR2	PRS.1.4 FR2
PRS bandwidth		48 PRBs	48 PRBs
PRS Resource slot offset	slot	0	4
PDSCH/PDCCH subcarrier spacing	kHz	120	120
EPRE ratio of PSS to SSS	dB	0	0
EPRE ratio of PBCH_DMRS to SSS			
EPRE ratio of PBCH to PBCH_DMRS			
EPRE ratio of PDCCH_DMRS to SSS			
EPRE ratio of PDCCH to PDCCH_DMRS			
EPRE ratio of PDSCH_DMRS to SSS			
EPRE ratio of PDSCH to PDSCH_DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation conditions		[Two-tap channel] Note 2	
Antenna configuration		1x2	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: The two-tap channel model is defined in 38.101-4 Annex B.2.4 (a = 1, τ_d=0.45 µs and f_D=5 Hz).

Table A.7.9.4.2.2-3: PRS-RSRPP OTA related test parameters

Parameter	Unit	Test 1	
		Cell 1	Cell 2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1	
Assumption for UE beams Note 7		Rough	
N_{oc} Note1	dBm/15kHz Note4	-91.6	
N_{oc} Note1	dBm/SCS Note4	-82.6	
$\hat{E}_s / N_{oc}$	dB	6.0	1.0
Es	dBm/SCS Note4	-	-
PRS_RP Note2	dBm/SCS	-76.6	-81.6
SS_RP Note2	dBm/SCS	-76.6	-81.6
$\hat{E}_s / I_{ot\ BB}$ Note6	dB	2.44	-5.98
Io Note2	dBm/95.04 MHz Note4	-50.05	

Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 2: PRS_RP, SS_RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 3: Void

Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone

Note 5: Void

Note 6: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.

A.7.9.4.2.3 Test Requirements

In each test, the absolute PRS-RSRPP measurement for each cell shall fulfil the absolute accuracy requirement in clause [10.1.24.Z.1] if the reported PRS-RSRPP is in the range shown in table A.7.9.4.2.3-1. The relative PRS-RSRPP measurement between the two PRS resources within the same cell shall fulfil the relative accuracy requirement in clause [10.1.24.Z.2].

Table A.7.9.4.2.3-1: PRS-RSRPP absolute accuracy test requirement

	Test requirement Notes1,2,3
Cell 1	PRS_RP1 -δ +G_{min} ≤ Reported RSRPP(dBm) ≤ PRS_RP1 +δ +G_{max}
Cell 2	PRS_RP2 -δ +G_{min} ≤ Reported RSRPP(dBm) ≤ PRS_RP2 +δ +G_{max}

Note 1: PRS_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration.

Note 2: δ is the RSRP absolute accuracy requirement from Table [10.1.24.Z.1-2], selected according to the Io used in the test.

Note 3: G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.6.1-1, selected according to the UE power class

A.8 E-UTRA standalone tests for NR RRM

Editor notes: All NR RRM tests under E-UTRA standalone operations are included in this Annex. All EN-DC related NR RRM tests are in A.4 and A.5.

A.8.1 Void

A.8.2 RRC_IDLE state mobility

A.8.2.1 Inter-RAT NR Cell re-selection

A.8.2.1.1 E-UTRA Cell reselection to higher priority NR target Cell in FR1

A.8.2.1.1.1 Test Purpose and Environment

This test is to verify the requirement for the E-UTRAN to NR inter-RAT cell reselection requirements specified in clause 4.2.2.5.6 in TS 36.133 [15].

The test scenario comprises of 1 E-UTRA cell and 1 NR cell as given in tables A.8.2.1.1.1-1, A.8.2.1.1.1-2, A.8.2.1.1.1-3 and A.8.2.1.1.1-4. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. E-UTRA cell 1 is already identified by the UE prior to the start of the test. Cell 2 is of higher priority than cell 1.

Table A.8.2.1.1.1-1: Supported test configurations

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.8.2.1.1.1-2: General test parameters for E-UTRA cell re-selection FR1 NR cell test case

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4, 5, 6	Cell2	The UE camps on cell 2 in the initial phase
	Neighbour cell		1, 2, 3, 4, 5, 6	Cell1	
T1 end condition	Active cell			Cell1	During T1 period the UE reselects to cell 1
	Neighbour cell			Cell2	
T3 end condition	Active cell		1, 2, 3, 4, 5, 6	Cell2	The UE shall perform reselection to cell 2 during T3
	Neighbour cell		1, 2, 3, 4, 5, 6	Cell1	
RF Channel Number			1, 2, 3, 4, 5, 6	1, 2	E-UTRAN radio channel (1) and NR radio channel (2) are used for this test
Time offset between cells			1, 4	3 ms	Asynchronous cells
			2, 5	3 μs	Synchronous cells
			3, 6	3 μs	Synchronous cells
Access Barring Information		-	1, 2, 3, 4, 5, 6	Not Sent	No additional delays in random access procedure.

DRX cycle length	s	1, 2, 3, 4, 5, 6	1.28	The value shall be used for all cells in the test.
NR PRACH configuration index		1, 2, 3, 4, 5, 6	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
T1	s	1, 2, 3, 4, 5, 6	15	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2	s	1, 2, 3, 4, 5, 6	>7	During T2, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T3.
T3	s	1, 2, 3, 4, 5, 6	75	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.8.2.1.1.1-3: Cell specific test parameters for NR cell 2

Parameter	Unit	Test configuration	Cell 2		
			T1	T2	T3
TDD configuration		1, 4	N/A		
		2, 5	TDDConf.1.1		
		3, 6	TDDConf.2.1		
PDSCH Reference measurement channel		1, 4	SR.1.1 FDD		
		2, 5	SR.1.1 TDD		
		3, 6	SR.2.1 TDD		
RMSI CORESET Reference Channel		1, 4	CR.1.1 FDD		
		2, 5	CR.1.1 TDD		
		3, 6	CR.2.1 TDD		
RMC CORESET Reference Channel		1, 4	CCR.1.1 FDD		
		2, 5	CCR.1.1 TDD		
		3, 6	CCR.2.1 TDD		
OCNG Patterns		1, 2, 3, 4, 5, 6	OP.1		
SMTC configuration		1, 2, 3, 4, 5, 6	SMTC.1		
SSB configuration		1, 4	SSB.1 FR1		
		2, 5	SSB.1 FR1		
		3, 6	SSB.2 FR1		
Initial DL BWP configuration		1, 2, 3, 4, 5, 6	DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3, 4, 5, 6	ULBWP.0.1		
RLM-RS		1, 2, 3, 4, 5, 6	SSB		
Qrxlevmin	dBm/SCS	1, 2, 4, 5	-140		
		3, 6	-137		
Pcompensation	dB	1, 2, 3, 4, 5, 6	0		
$Qhyst_s$	dB	1, 2, 3, 4, 5, 6	0		
$Qoffset_{s,n}$	dB	1, 2, 3, 4, 5, 6	0		
Cell_selection_and_reselection_quality_measurement		1, 2, 3, 4, 5, 6	SS-RSRP		
$\hat{E}_s/I_{ot}$	dB	1, 4	-4	-infinity	12
		2, 5			
		3, 6			

N_{oc} Note2	dBm/SCS	1, 4	-98		
		2, 5	-98		
		3, 6	-95		
N_{oc} Note2	dBm/15 kHz	1, 4	-98		
		2, 5			
		3, 6			
$\hat{E}_s / N_{oc}$	dB	1, 4	-4	-infinity	12
		2, 5			
		3, 6			
SS-RSRP Note3	dBm/SCS	1, 4	-102	-infinity	-86
		2, 5	-102	-infinity	-86
		3, 6	-99	-infinity	-83
Io	dBm/9.36 MHz	1, 4	-68.60	-70.05	-57.78
	dBm/9.36 MHz	2, 5	-68.60	-70.05	-57.78
	dBm/38.16 MHz	3, 6	-62.50	-63.95	-51.69
Treselection	s	1, 2, 3, 4, 5, 6	0	0	0
SnonintrasearchP	dB	1, 2, 3, 4, 5, 6	50		
$Thresh_{x, highP}$	dB	1, 2, 3, 4, 5, 6	48		
$Thresh_{serving, lowP}$	dB	1, 2, 3, 4, 5, 6	44		
$Thresh_{x, lowP}$	dB	1, 2, 3, 4, 5, 6	50		
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.8.2.1.1.1-4: Cell specific test parameters for E-UTRA cell 1

Parameter	Unit	Cell 1		
		T1	T2	T3
E-UTRA RF Channel number		1		
$BW_{channel}$	MHz	10		
OCNG Patterns defined in TS 36.133 [15] clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6		
PBCH_RA	dB	0		
PBCH_RB	dB			
PSS_RA	dB			
SSS_RA	dB			
PCFICH_RB	dB			
PHICH_RA	dB			
PHICH_RB	dB			
PDCCH_RA	dB			
PDCCH_RB	dB			
PDSCH_RA	dB			
PDSCH_RB	dB			
OCNG_RA Note 1	dB			
OCNG_RB Note 1	dB			
Qrxlevmin	dBm	-140		
N_{oc} Note 2	dBm/15 kHz	-98		
RSRP Note 3	dBm/15 KHz	-84	-84	-84
$\hat{E}_s / I_{ot}$	dB	14	14	14
$\hat{E}_s / N_{oc}$	dB	14	14	14
$Treselection_{EUTRAN}$	S	0		
SnonintrasearchP	dB	50		
$Thresh_{x, highP}$	dB	48		
$Thresh_{serving, lowP}$	dB	44		
$Thresh_{x, lowP}$	dB	50		
Propagation Condition		AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.8.2.1.1.2 Test Requirements

The cell reselection delay to a higher priority NR cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration updateon cell 2.

The cell re-selection delay to a higher priority cell shall be less than 68 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a higher priority cell can be expressed as: $T_{higher_priority_search} + T_{evaluate, NR} + T_{SI-NR,}$ and to a lower priority cell can be expressed as: $T_{evaluate, EUTRAN} + T_{SI-EUTRA,}$

Where:

$T_{higher_priority_search}$ See clause 4.2.2 in TS 36.133 [15]

$T_{evaluate, NR}$ See Table 4.2.2.5.6-1 in clause 4.2.2.5.6 in TS 36.133 [15]

T_{SI-NR} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

$T_{evaluate, EUTRAN}$ See Table 4.2.2.5-1 in clause 4.2.2.5

$T_{SI-EUTRA}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 67.68 s, allow 68 s for the cell re-selection delay to a higher priority NR cell and 7.68 s for the cell re-selection delay to a lower priority cell in the test case, which we allow 8 s.

A.8.2.1.2 E-UTRA Cell reselection to lower priority NR target Cell in FR1 for UE configured with highSpeedInterRAT-NR-r16

A.8.2.1.2.1 Test Purpose and Environment

This test is to verify the requirement for the E-UTRAN to NR inter-RAT cell reselection requirements specified in clause 4.2.2.5.6 in 36.133 [15].

The test scenario comprises of 1 E-UTRA cell and 1 NR cell as given in tables A.8.2.1.2.1-1, A.8.2.1.2.1-2, A.8.2.1.2.1-3 and A.8.2.1.2.1-4. In SIB of the E-UTRA cell, highSpeedInterRAT-NR-r16 is configured and the carrier of NR cell is configured with highSpeedCarrierNR-r16. The test consists of two time periods, with time duration of T1 and T2 respectively. Both E-UTRA cell 1 and NR cell 2 are already identified by the UE prior to the start of the test. NR cell 2 is of lower priority than E-UTRA cell 1.

Table A.8.2.1.2.1-1: Supported test configurations for UE configured with highSpeedInterRAT-NR-r16

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.8.2.1.2.1-2: General test parameters in E-UTRA cell re-selection FR1 NR cell test case for UE configured with highSpeedInterRAT-NR-r16

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4, 5, 6	Cell1	The UE camps on cell 1 in the initial phase
T1 end condition	Active cell		1, 2, 3, 4, 5, 6	Cell2	The UE shall perform reselection to cell 2 during T1
	Neighbour cells		1, 2, 3, 4, 5, 6	Cell1	
T2 end condition	Active cell		1, 2, 3, 4, 5, 6	Cell1	The UE shall perform reselection to cell 1 during T2 for iteration of the tests.
	Neighbour cells		1, 2, 3, 4, 5, 6	Cell2	
RF Channel Number			1, 2, 3, 4, 5, 6	1, 2	E-UTRAN radio channel (1) and NR radio channel (2) are used for this test

Time offset between cells		1, 4	3 ms	Asynchronous cells
		2, 5	3 μs	Synchronous cells
		3, 6	3 μs	Synchronous cells
Access Barring Information	-	1, 2, 3, 4, 5, 6	Not Sent	No additional delays in random access procedure.
DRX cycle length	s	1, 2, 3, 4, 5, 6	0.32	The value shall be used for all cells in the test.
NR PRACH configuration index		1, 2, 3, 4, 5, 6	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
T1	s	1, 2, 3, 4, 5, 6	15	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2	s	1, 2, 3, 4, 5, 6	75	T2 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.8.2.1.2.1-3: Cell specific test parameters for NR cell 2 in E-UTRA cell re-selection FR1 NR cell test case for UE configured with highSpeedInterRAT-NR-r16

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
TDD configuration		1, 4	N/A	
		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	
PDSCH Reference measurement channel		1, 4	SR.1.1 FDD	
		2, 5	SR.1.1 TDD	
		3, 6	SR.2.1 TDD	
RMSI CORESET Reference Channel		1, 4	CR.1.1 FDD	
		2, 5	CR.1.1 TDD	
		3, 6	CR.2.1 TDD	
RMC CORESET Reference Channel		1, 4	CCR.1.1 FDD	
		2, 5	CCR.1.1 TDD	
		3, 6	CCR.2.1 TDD	
OCNG Patterns		1, 2, 3, 4, 5, 6	OP.1	
SMTC configuration		1, 2, 3, 4, 5, 6	SMTC.1	
SSB configuration		1, 4	SSB.1 FR1	
		2, 5	SSB.1 FR1	
		3, 6	SSB.2 FR1	
Initial DL BWP configuration		1, 2, 3, 4, 5, 6	DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3, 4, 5, 6	ULBWP.0.1	
RLM-RS		1, 2, 3, 4, 5, 6	SSB	
Qrxlevmin	dBm/SCS	1, 2, 4, 5	-140	
		3, 6	-137	
Pcompensation	dB	1, 2, 3, 4, 5, 6	0	
$Qhyst_s$	dB	1, 2, 3, 4, 5, 6	0	
$Qoffset_{s,n}$	dB	1, 2, 3, 4, 5, 6	0	
Cell_selection_and_reselection_quality_measurement		1, 2, 3, 4, 5, 6	SS-RSRP	

$\hat{E}_s / I_{ot}$	dB	1, 4	14	14
		2, 5		
		3, 6		
N_{oc} Note2	dBm/SCS	1, 4	-98	
		2, 5	-98	
		3, 6	-95	
N_{oc} Note2	dBm/15 kHz	1, 4	-98	
		2, 5		
		3, 6		
$\hat{E}_s / N_{oc}$	dB	1, 4	14	14
		2, 5		
		3, 6		
SS-RSRP Note3	dBm/SCS	1, 4	-84	-84
		2, 5	-84	-84
		3, 6	-81	-81
Io	dBm/9.36 MHz	1, 4	-55.88	-55.88
	dBm/9.36 MHz	2, 5	-55.88	-55.88
	dBm/38.16 MHz	3, 6	-47.79	-47.79
Treselection	s	1, 2, 3, 4, 5, 6	0	
Snonintrasearch	dB	1, 2, 3, 4, 5, 6	Not sent	
$Thresh_{x, high}$	dB	1, 2, 3, 4, 5, 6	48	
$Thresh_{serving, low}$	dB	1, 2, 3, 4, 5, 6	44	
$Thresh_{x, low}$	dB	1, 2, 3, 4, 5, 6	50	
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN 3334 Note 4	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: The AWGN 3334 Hz condition is a non fading propagation channel with one tap. Doppler shift is a constant 3334 Hz.

Table A.8.2.1.2.1-4: Cell specific test parameters for E-UTRA cell 1 in E-UTRA cell re-selection FR1 NR cell test case for UE configured with highSpeedInterRAT-NR-r16

Parameter	Unit	Cell 1	
		T1	T2
E-UTRA RF Channel number		1	
$BW_{channel}$	MHz	10	
OCNG Patterns defined in TS 36.133 clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6	
PBCH_RA	dB	0	
PBCH_RB	dB		
PSS_RA	dB		
SSS_RA	dB		
PCFICH_RB	dB		
PHICH_RA	dB		
PHICH_RB	dB		

PDCCH_RA	dB		
PDCCH_RB	dB		
PDSCH_RA	dB		
PDSCH_RB	dB		
OCNG_RA Note 1	dB		
OCNG_RB Note 1	dB		
Qrxlevmin	dBm	-140	
N_{oc} Note 2	dBm/15 kHz	-98	
RSRP Note 3	dBm/15 KHz	-102	-86
$\hat{E}_s / I_{ot}$	dB	-4	12
$\hat{E}_s / N_{oc}$	dB	-4	12
$Treselection_{EUTRAN}$	S	0	
Snonintrasearch	dB	50	
$Thresh_{x, high}$	dB	48	
$Thresh_{serving, low}$	dB	44	
$Thresh_{x, low}$	dB	50	
Propagation Condition		AWGN 1944 Hz Note4	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: The AWGN 1944 Hz condition is a non fading propagation channel with one tap. Doppler shift is a constant 1944 Hz.

A.8.2.1.2.2 Test Requirements

The cell reselection delay to a lower priority NR cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the RRC CONNECTION REQUEST message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a lower priority cell shall be less than 3 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a lower priority cell can be expressed as: $T_{evaluate, NR_HST} + T_{SI-NR,}$

Where:

$T_{evaluate, NR_HST}$ See Table 4.2.2.5.6-2 in clause 4.2.2.5.6 in [15]

T_{SI-NR} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 2.24 s, allow 3 s for the cell re-selection delay to a lower priority NR cell.

A.8.2.2 E-UTRA – NR Inter-RAT Early Measruement Reporting

A.8.2.2.1 E-UTRA – NR Early Measurement Reporting for NR in FR1

A.8.2.2.1.1 Test Purpose and Environment

This test is to verify the requirement for the E-UTRAN to NR inter-RAT Idle mode DC measurement requirements specified in clause 4.9.2.4 in TS 36.133 [15]. This test is also to verify the accuracy requirement for the E-UTRAN to NR inter-RAT Idle mode DC measurement requirements specified in clause 9.11.1A and 9.11.2A in TS 36.133 [15]. Supported test configurations are shown in Table A.8.2.2.1.1-1.

Table A.8.2.2.1.1-1: Supported test configurations

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

The test scenario comprises of 1 E-UTRA cell (Cell 1) and 1 NR cell (Cell 2). The the test parameters and applicability for the E-UTRAN cell are defined in Table A.8.2.2.1.1-4. The general test parameters and the cell specific test parameters for the NR cell are specified in Table A.8.2.2.1.1-2 and Table A.8.2.2.1.1-3, respectively.

The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Prior to the start of the time duration T1, the UE shall be connected to Cell 1. During T1, Cell 2 shall be powered off. At the end of T1, the RRC connection to Cell 1 is released and UE is configured Idle mode DC measurement on the carrier frequency of Cell 2. Time duration T2 starts when the RRC connection is released, and during the T2 UE is in Idle mode. Cell 2 shall be powered on from the beginning of T2. At beginning of T3 the UE is paged for connection setup and requested by the network to send idle mode measurements.

Table A.8.2.2.1.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3, 4, 5, 6	E-UTRAN Cell 1	
Neighbour cell		1, 2, 3, 4, 5, 6	NR Cell 2	Cell 2 is of higher priority.
RF Channel Number		1, 2, 3, 4, 5, 6	1: Cell 1 2: Cell 2	
DRX cycle length	s	1, 2, 3, 4, 5, 6	1.28	
Time offset between Cell 1 and Cell 2		1, 2, 3, 4, 5, 6	3 μs	
T1	s	1, 2, 3, 4, 5, 6	0.5	
T2	s	1, 2, 3, 4, 5, 6	71	
T3	s	1, 2, 3, 4, 5, 6	2	
T331	s	1, 2, 3, 4, 5, 6	300	

Table A.8.2.2.1.1-3: Cell specific test parameters for NR cell 2

Parameter	Unit	Test configuration	Cell 2		
			T1	T2	T3
TDD configuration		1, 4	N/A		

		2, 5	TDDConf.1.1		
		3, 6	TDDConf.2.1		
PDSCH Reference measurement channel		1, 4	SR.1.1 FDD		
		2, 5	SR.1.1 TDD		
		3, 6	SR.2.1 TDD		
RMSI CORESET Reference Channel		1, 4	CR.1.1 FDD		
		2, 5	CR.1.1 TDD		
		3, 6	CR.2.1 TDD		
RMC CORESET Reference Channel		1, 4	CCR.1.1 FDD		
		2, 5	CCR.1.1 TDD		
		3, 6	CCR.2.1 TDD		
OCNG Patterns		1, 2, 3, 4, 5, 6	OP.1		
SMTC configuration		1, 2, 3, 4, 5, 6	SMTC.1		
SSB configuration		1, 4	SSB.1 FR1		
		2, 5	SSB.1 FR1		
		3, 6	SSB.2 FR1		
Initial DL BWP configuration		1, 2, 3, 4, 5, 6	DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3, 4, 5, 6	ULBWP.0.1		
Qrxlevmin	dBm/SCS	1, 2, 4, 5	-140		
		3, 6	-137		
Pcompensation	dB	1, 2, 3, 4, 5, 6	0		
Qhysts	dB	1, 2, 3, 4, 5, 6	0		
Qoffsets, n	dB	1, 2, 3, 4, 5, 6	0		
Cell_selection_and_reselection_quality_measurement		1, 2, 3, 4, 5, 6	SS-RSRP		
N_{oc} Note2	dBm/SCS	1, 4	-98		
		2, 5	-98		
		3, 6	-95		
N_{oc} Note2	dBm/15 kHz	1, 4	-98		
		2, 5			
		3, 6			
$\hat{E}_s / N_{oc}$	dB	1, 2, 3, 4, 5, 6	-infinity	-4	-4
$\hat{E}_s / I_{ot}$	dB	1, 2, 3, 4, 5, 6	-infinity	-4	-4
SS-RSRP Note3	dBm/SCS	1, 4	-infinity	-102	-102
		2, 5	-infinity	-102	-102
		3, 6	-infinity	-99	-99
SS-RSRQ Note3	dB	1, 4	-infinity	-16.25	-16.25
		2, 5	-infinity	-16.25	-16.25
		3, 6	-infinity	-16.25	-16.25
Io	dBm/9.36 MHz	1, 4	-70.05	-68.60	-68.60
	dBm/9.36 MHz	2, 5	-70.05	-68.60	-68.60
	dBm/38.16 MHz	3, 6	-63.96	-62.50	-62.50
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.8.2.2.1.1-4: Cell specific test parameters for E-UTRA cell 1

Parameter	Unit	Cell 1		
		T1	T2	T3
E-UTRA RF Channel number		1		
$BW_{channel}$	MHz	10		
OCNG Patterns defined in TS 36.133 [15] clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6		
PBCH_RA	dB	0		
PBCH_RB	dB			
PSS_RA	dB			
SSS_RA	dB			
PCFICH_RB	dB			
PHICH_RA	dB			
PHICH_RB	dB			
PDCCH_RA	dB			
PDCCH_RB	dB			
PDSCH_RA	dB			
PDSCH_RB	dB			
OCNG_RA Note 1	dB			
OCNG_RB Note 1	dB			
Qrxlevmin	dBm	-140		
N_{oc} Note 2	dBm/15 kHz	-98		
RSRP Note 3	dBm/15 KHz	-84	-84	-84
RSRQ Note 3	dB	-10.96	-10.96	-10.96
$\hat{E}_s/I_{ot}$	dB	14	14	14
$\hat{E}_s/N_{oc}$	dB	14	14	14
$Treselection_{EUTRAN}$	S	0		
SnonintrasearchP	dB	50		
$Thresh_{x, highP}$	dB	48		
$Thresh_{serving, lowP}$	dB	44		
$Thresh_{x, lowP}$	dB	50		
beamMeasConfigIdle		True		
Propagation Condition		AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.8.2.2.1.2 Test Requirements

At the beginning of the time-period T2 the connection is released, and UE enters idle mode. During the time period T2 the UE is in Idle mode and Cell 2 is active. The UE shall not perform reselection. The UE shall perform Idle Mode DC measurement according to clause 4.9.2.4 in TS 36.133 [15]. UE shall be able to detect, acqure the SSB index and measure the SS-RSRP and SS-RSRQ from Cell 2 for Idle mode DC measurement during T2.

NOTE: The Idle mode DC measurement period for the test setup can be expressed as: $T_{higher_priority_search}$ + $T_{SSB_index,NR}$ + $T_{evaluate,\ NR}$.

Where:

$T_{higher_priority_search}$ See clause 4.2.2 in TS 36.133 [15]

$T_{SSB_index,NR}$ See Table 4.9.2.4-1 in clause 4.9.2.4 in TS 36.133 [15]

$T_{evaluate,\ NR}$ See Table 4.2.2.5.6-1 in clause 4.2.2.5.6 in TS 36.133 [15]

This gives a total of 70.24 s, allow 71 s for the T2.

At the start of T3 the UE is paged for connection setup. During the connection setup the UE is requested to transmit early measurement report. The UE shall send early measurement report to the PCell.

After receiving the requested early measurement report, the test equipment verifies the accuracy of measurement reported for serving Cell 1 and Cell 2 meets the requirements in Section 9.1.2B in TS 36.133 [15] and Section 9.1.3B, respectively and test ends.

The rate of correct events observed during repeated tests shall be at least 90%.

A.8.2.2.2 E-UTRA – NR Early Measurement Reporting for NR in FR2

A.8.2.2.2.1 Test Purpose and Environment

This test is to verify the requirement for the E-UTRAN to NR inter-RAT Idle mode DC measurement requirements specified in clause 4.9.2.4 in TS 36.133 [15]. This test is also to verify the accuracy requirement for the E-UTRAN to NR inter-RAT Idle mode DC measurement requirements specified in clause 9.11.1A and 9.11.2A in TS 36.133 [15]. Supported test configurations are shown in Table A.8.2.2.2.1-1.

Table A.8.2.2.2.1-1: Supported test configurations

Configuration	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

The test scenario comprises of 1 E-UTRA cell (Cell 1) and 1 NR cell (Cell 2). The the test parameters and applicability for the E-UTRAN cell are defined in Table A.8.2.2.2.1-4. The general test parameters and the cell specific test parameters for the NR cell are speficied in Table A.8.2.2.2.1-2 and Table A.8.2.2.2.1-3, respectively.

The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Prior to the start of the time duration T1, the UE shall be connected to Cell 1. During T1, Cell 2 shall be powered off. At the end of T1, the RRC connection to Cell 1 is released and UE is configured Idle mode DC measurement on the carrier frequency of Cell 2. Time duration T2 starts when the RRC connection is released, and during the T2 UE is in Idle mode. Cell 2 shall be powered on from the beginning of T2. At beginning of T3 the UE is paged for connection setup and requested by the network to send idle mode measurements.

Table A.8.2.2.2.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2	E-UTRAN Cell 1	E-UTRA cell 1 is on E-UTRA RF channel number 1 as defined in clause A.3.7.2.2.
Neighbour cell		1, 2	NR Cell 2	Cell 2 is of higher priority.
E-UTRA RF Channel Number		1, 2	1	One E-UTRA carrier frequency is used.
NR RF Channel Number		1, 2	1	One FR2 NR carrier frequency is used.
DRX cycle length	s	1, 2	1.28	
Time offset between Cell 1 and Cell 2		1, 2	3 μs	
T1	s	1, 2	0.5	
T2	s	1, 2	128	
T3	s	1, 2	2	
T331	s	1, 2	300	

Table A.8.2.2.2.1-3: Cell specific test parameters for NR cell 2

Parameter	Unit	Test configuration	Cell 2		
			T1	T2	T3
TDD configuration		1, 2	TDDConf.3.1		
PDSCH Reference measurement channel		1, 2	SR.3.1 TDD		
RMSI CORESET Reference Channel		1, 2	CR.3.1 TDD		
RMC CORESET Reference Channel		1, 2	CCR.3.1 TDD		
OCNG Patterns		1, 2	OP.1		
$BW_{channel}$	MHz	1, 2	100		
Data RBs allocated		1, 2	66		
SMTC configuration		1, 2	SMTC.1		
SSB configuration		1, 2	SSB.1 FR2		
Initial DL BWP configuration		1, 2	DLBWP.0.1		
Initial UL BWP configuration		1, 2	ULBWP.0.1		
RLM-RS			SSB		
Qrxlevmin			-140		
Pcompensation			0		
Qhysts			0		
Qoffsets, n			0		
Cell_selection_and_reselection_quality_measurement			SS-RSRP		
AoA setup			Setup 1 defined in A.3.15.1		
Beam assumption Note 4			Rough		
$\hat{E}_s/I_{ot}$ BB Note 5	dB	1, 2	-infinity	-4.18	-4.18
N_{oc} Note2	dBm/SCS	1, 2	-98		
N_{oc} Note2	dBm/15kHz	1, 2	-107		
$\hat{E}_s/N_{oc}$	dB	1, 2	-infinity	-4	-4
SS-RSRP Note3	dBm/SCS	1, 2	-infinity	-102	-102

SS-RSRQ Note3	dB	1, 2	-infinity	-16.25	-16.25
Io	dBm/95.04MHz	1, 2	-69.01	-67.56	-67.56
Propagation Condition		1, 2	AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Note 5: Calculation of Es/IotBB includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMBP from TS 38.101-2 [19] Table 6.2.1.3-4.

Table A.8.2.2.2.1-4: Cell specific test parameters for E-UTRA cell 1

Parameter	Unit	Cell 1		
		T1	T2	T3
E-UTRA RF Channel number		1		
$BW_{channel}$	MHz	10		
OCNG Patterns defined in TS 36.133 [15] clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6		
PBCH_RA	dB	0		
PBCH_RB	dB			
PSS_RA	dB			
SSS_RA	dB			
PCFICH_RB	dB			
PHICH_RA	dB			
PHICH_RB	dB			
PDCCH_RA	dB			
PDCCH_RB	dB			
PDSCH_RA	dB			
PDSCH_RB	dB			
OCNG_RA Note 1	dB			
OCNG_RB Note 1	dB			
Qrxlevmin	dBm	-140		
N_{oc} Note 2	dBm/15 kHz	-98		
RSRP Note 3	dBm/15 KHz	-84	-84	-84
RSRQ Note 3	dB	-10.96	-10.96	-10.96
$\hat{E}_s/I_{ot}$	dB	14	14	14

$\hat{E}_s/N_{oc}$	dB	14	14	14
$Treselection_{EUTRAN}$	S	0		
SnonintrasearchP	dB	N/A		
$Thresh_{x, highP}$	dB	48		
$Thresh_{serving, lowP}$	dB	44		
$Thresh_{x, lowP}$	dB	50		
beamMeasConfigIdle		False		
Propagation Condition		AWGN		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

A.8.2.2.2.2 Test Requirements

At the beginning of the time-period T2 the connection is released, and UE enters idle mode. During the time period T2 the UE is in Idle mode and Cell 2 is active. The UE shall not perform reselection. The UE shall perform Idle Mode DC measurement according to clause 4.9.2.4 in TS 36.133 [15]. UE shall be able to detect, acqure the SSB index and measure the SS-RSRP and SS-RSRQ from Cell 2 for Idle mode DC measurement during T2.

NOTE: The Idle mode DC measurement period for the test setup can be expressed as: $T_{detect, NR}$.

Where:

$T_{detect, NR}$ See Table 4.2.2.5.6-1 in clause 4.2.2.5.6 in TS 36.133 [15]

This gives a total of 128 s, allow 128 s for the T2.

At the start of T3 the UE is paged for connection setup. During the connection setup the UE is requested to transmit early measurement report. The UE shall send early measurement report to the PCell.

After receiving the requested early measurement report, the test equipment verifies the accuracy of measurement reported for serving Cell 1 and Cell 2 meets the requirements in Section 9.1.2B in TS 36.133 [15] and Section 9.1.3B, respectively and test ends.

The rate of correct events observed during repeated tests shall be at least 90%.

A.8.3 RRC_CONNECTED state mobility

A.8.3.1 Handover

A.8.3.1.1 E-UTRAN - NR handover in FR1

A.8.3.1.1.1 Test Purpose and Environment

This test shall verify the E-UTRAN to NR FR1 handover requirements as specified in clause 6.1.2.1 specified in clause 5.3.4 in TS 36.133 [15].

The test comprises of one E-UTRA carrier and one NR carrier. There are two cells and one cell on each carrier. Cell 1 is the E-UTRAN and Cell 2 is an inter-RAT NR neighbour cell. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE does not have any timing

information of Cell 2. Starting T2, Cell 2 becomes detectable and the UE is expected to detect and send a measurement report. Gap pattern configuration with id #0 as specified in Table 8.1.2.1-1 of TS 36.133 [15] is configured before T2 begins to enable inter-RAT frequency monitoring.

A RRC message implying handover shall be sent to the UE during period T2 after the UE has reported Event B2. The start of T3 is the instant when the last TTI containing the RRC message implying handover is sent to the UE. The handover message shall contain Cell 2 as the target cell.

Supported test configurations are shown in table A.8.3.1.1-1. General test parameters are provided in Table A.8.3.1.1-2. Cell specific test parameters for Cell 1 and Cell 2 are provided in Tables A.8.3.1.1-3 and A.8.3.1.1-4 respectively.

Table A.8.3.1.1-1: Supported test configurations for E-UTRAN inter-RAT NR handover

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.8.3.1.1-2: General test parameters for E-UTRAN inter-RAT NR handover

Parameter		Unit	Value	Comment
NR RF Channel Number			1	1 NR carrier frequency is used in the test
LTE RF Channel Number			2	1 E-UTRAN carrier frequency is used in the test
Initial conditions	Active cell		Cell 1	E-UTRAN cell
	Neighbouring cell		Cell 2	NR cell
Final condition	Active cell		Cell 2	
NR measurement quantity			SS-RSRP	
E-UTRAN measurement quantity			RSRP	
b2-Threshold1		dBm	-83	Absolute E-UTRAN RSRP threshold for event B2
b2-Threshold2NR		dBm	As specified in Table A.8.3.1.1-4	Absolute NR SS-RSRP threshold for event B2
Hysteresis		dB	0	
TimeToTrigger		s	0	
Filter coefficient			0	L3 filtering is not used
DRX			OFF	Non-DRX test
Access Barring Information		-	Not sent	No additional delays in random access procedure
Time offset between cells			3 ms	Asynchronous cells
Gap pattern configuration Id			0	As specified in Table 8.1.2.1-1 started before T2 starts [15]
T1		s	5	
T2		s	≤5	
T3		s	1	

Table A.8.3.1.1-3: Cell specific test parameters for E-UTRAN inter-RAT NR handover (Cell 1)

Parameter	Unit	Configuration	Cell 1		
			T1	T2	T3
RF channel number		1, 2, 3, 4, 5, 6	2		
Duplex mode		1, 2, 3	FDD		

		4, 5, 6	TDD		
TDD special subframe configuration[Note1]		4, 5, 6	6		
TDD uplink-downlink configuration[Note1]		4, 5, 6	1		
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100		
PRACH Configuration[Note2]		1, 2, 3	4		
		4, 5, 6	53		
PDSCH parameters: DL Reference Measurement Channel[Note3]		1, 2, 3	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD		
		4, 5, 6	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD		
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note3]		1, 2, 3	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD		
		4, 5, 6	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD		
OCNG Patterns[Note3]		1, 2, 3	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD		
		4, 5, 6	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD		
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0		
PBCH_RB					
PSS_RA					
SSS_RA					
PCFICH_RB					
PHICH_RA					
PHICH_RB					
PDCCH_RA					
PDCCH_RB					
PDSCH_RA					
PDSCH_RB					
OCNG_RA[Note4]					
OCNG_RB[Note4]					
N_{oc}[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6	-98		
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	7	7	7
$\hat{E}_s/I_{ot}$[Note6]	dB	1, 2, 3, 4, 5, 6	7	7	7
RSRP[Note6]	dBm/15kHz	1, 2, 3, 4, 5, 6	-91	-91	-91
SCH_RP[Note6]	dBm/15kHz	1, 2, 3, 4, 5, 6	-91	-91	-91
Io[Note6]	dBm/9MHz	1, 2, 3, 4, 5, 6	-62.43	-62.43	-62.43
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN		
Antenna Configuration and Correlation Matrix [Note7]		1, 2, 3, 4, 5, 6	1x2 Low		

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [23].
Note 3: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 4: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 6: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 7: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].

Table A.8.3.1.1-4: Cell specific test parameters E-UTRAN inter-RAT NR handover (Cell 2)

Parameter		Unit	Configuration	Cell 2		
				T1	T2	T3
RF channel number			1, 2, 3, 4, 5, 6	1		
Duplex mode			1, 4	FDD		
			2, 3, 5, 6	TDD		
TDD Configuration			2, 5	TDDConf.1.1		
			3, 6	TDDConf.2.1		
$BW_{channel}$		MHz	1, 4	10: $N_{RB,c}$ = 52 (FDD)		
			2, 5	10: $N_{RB,c}$ = 52 (TDD)		
			3, 6	40: $N_{RB,c}$ = 106 (TDD)		
PDSCH reference measurement channel			1, 4	SR.1.1 FDD		
			2, 5	SR.1.1 TDD		
			3, 6	SR.2.1 TDD		
CORSET reference channel			1, 4	CR.1.1 FDD		
			2, 5	CR.1.1 TDD		
			3, 6	CR.2.1 TDD		
PRACH configuration				FR1 PRACH configuration 1		
OCNG pattern[Note1]			1, 2, 3, 4, 5, 6	OP.1		
BWP	Initial DL BWP		1, 2, 3, 4, 5, 6	DLBWP.0.1		
	Dedicated DL BWP			DLBWP.1.1		
	Initial UL BWP			ULBWP.0.1		
	Dedicated UL BWP			ULBWP.1.1		
SMTC configuration			1, 2, 3, 4, 5, 6	SMTC.1		
SSB configuration			1, 2, 4, 5	SSB.1 FR1		
			3, 6	SSB.2 FR1		
b2-Threshold2NR		dBm	1, 2, 4, 5	-106		
			3, 6	-103		
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4, 5, 6	0		
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						
EPRE ratio of PDCCH to PDCCH_DMRS						
EPRE ratio of PDSCH_DMRS to SSS						
EPRE ratio of PDSCH to PDSCH_DMRS						
EPRE ratio of OCNG DMRS to SSS						
EPRE ratio of OCNG to OCNG DMRS						
N_{oc}[Note2]		dBm/15 KHz	1, 2, 3, 4, 5, 6	-98		
N_{oc}[Note2]		dBm/SCS	1, 2, 4, 5	-98		
			3, 6	-95		
$\hat{E}_s/N_{oc}$		dB	1, 2, 3, 4, 5, 6	-inifinity	0	0
$\hat{E}_s/I_{ot}$[Note3]		dB	1, 2, 3, 4, 5, 6	-inifinity	0	0
SS-RSRP[Note3]		dBm/SCS	1, 2, 4, 5	-inifinity	-98	-98
			3, 6	-inifinity	-95	-95
Io[Note3]		dBm/9.36 MHz	1, 2, 4, 5	-70.05	-67.04	-67.04

	dBm/38.16 MHz	3, 6	-63.96	-60.94	-60.94
Propagation condition		1, 2, 3, 4, 5, 6	AWGN		
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x2 Low		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					

A.8.3.1.1.2 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 112 ms from the beginning of time period T3.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 50 ms and is specified in TS36.133.

$T_{interrupt}$ = 62 ms in the test; $T_{interrupt}$ is defined in TS36.133 clause 5.3.4.3.

This gives a total of 112 ms.

A.8.4 Measurement procedure

A.8.4.1 E-UTRA – NR Inter-RAT SFTD Measurement Delay

A.8.4.1.1 E-UTRA – NR Inter-RAT SFTD Measurement Delay in non-DRX

A.8.4.1.1.1 Test Purpose and Environment

The purpose of this test is to partly verify that measurement reporting delay for SFTD between E-UTRA PCell and inter-RAT NR neighbour cell in FR1 is within the requirements stated in clauses 8.1.2.4.25 and 8.1.2.4.26 of TS 36.133 [15] for E-UTRA FDD and TDD, respectively, when no measurement gaps are provided and no DRX is configured.

The tests consist of a single time period of duration T1. Two carriers are used in the tests: one E-UTRA carrier with the PCell (Cell 1), and one NR carrier with the NR neighbour cell (Cell 2).

Prior to the start of time duration T1, the UE is connected to Cell 1 and configured to carry out intra-frequency measurements only. The point in time at which the UE receives, at the UE antenna connector(s), a RRC message containing a measurement configuration for SFTD measurements on RF channel 1 defines the start of time duration T1. Following the start of T1 the UE shall detect Cell 2, determine the SFN and frame time difference of Cell 2 relative to Cell 1, and send a measurement report.

The supported test configurations are listed in Table A.8.4.1.1.1-1 below. Test parameters and cell-specific parameters for the NR cell are provided in Tables A.8.4.1.1.1-2 and A.8.4.1.1.1-3 below, respectively. Cell-specific parameters for the E-UTRA cell are provided in Table A.3.7.2.1-1 in clause A.3.7.2.1.

Table A.8.4.1.1.1-1: Applicable E-UTRA and NR configurations for inter-RAT SFTD measurement delay test

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.8.4.1.1.1-2: Applicable E-UTRA and NR configurations for inter-RAT SFTD measurement delay test

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1		One E-UTRAN carrier frequencies is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1		One NR FR1 carrier frequencies is used.
Active cell		Config 1,2,3,4,5,6	Cell 1		Cell 1 is on E-UTRA RF channel number 1.
Neighbour cell		Config 1,2,3,4,5,6	Cell 2		Cell 2 is on NR RF channel number 1.
SSB configuration		Config 1,4	SSB.1 FR1		As specified in clause A.3.10.1
		Config 2,5	SSB.1 FR1		As specified in clause A.3.10.1
		Config 3,6	SSB.2 FR1		As specified in clause A.3.10.1
CP length		Config 1,2,3,4,5,6	Normal		Applicable to both cells.
DRX		Config 1,2,3,4,5,6	OFF		DRX is not used
Frame time offset between serving and neighbour cells	ms	Config 1,2,4,5	3	7	Asynchronous cells. The timing of Cell 2 relative to the timing of Cell 1.
	µs	Config 3,6	3		Synchronous cells.
SFN offset between serving and neighbour cells		Config 1,2,3,4,5,6	0	1	SFN of Cell 2 relative to SFN of Cell 1.
T1	s	Config 1,2,3,4,5,6	1		

Table A.8.4.1.1.1-3: Cell specific test parameters for Cell 2 in inter-RAT SFTD measurement delay test

Parameter	Unit	Test configuration	Cell 2
NR RF Channel Number		Config 1,2,3,4,5,6	1
Duplex mode		Config 1,4	FDD
		Config 2,3,5,6	TDD
$BW_{channel}$	MHz	Config 1,4	10: $N_{RB,c}$ = 52
		Config 2,5	10: $N_{RB,c}$ = 52
		Config 3,6	40: $N_{RB,c}$ = 106
TDD configuration		Config 2,5	TDDConf.1.1
		Config 3,6	TDDConf.2.1
OCNG Pattern defined in A.3.2.1.1		Config 1,2,3,4,5,6	OP.1
SMTC configuration		Config 1,2,3,4,5,6	SMTC.1

PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2,4,5	15
		Config 3,6	30
EPRE ratio of PSS to SSS	dB	Config 1,2,3,4,5,6	0
EPRE ratio of PBCH DMRS to SSS	dB		
EPRE ratio of PBCH to PBCH DMRS	dB		
EPRE ratio of OCNG DMRS to SSS Note 1	dB		
EPRE ratio of OCNG to OCNG DMRS Note 1	dB		
N_{oc} Note2	dBm/15kHz		-98
N_{oc} Note2	dBm/SCS	Config 1,2,4,5	-98
		Config 3,6	-95
SS-RSRP Note 3, 4	dBm/SCS	Config 1,2,4,5	-94
		Config 3,6	-91
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4,5,6	4
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3,4,5,6	4
Io Note 3	dBm/9.36MHz	Config 1,2,4,5	-64.59
	dBm/38.16MHz	Config 3,6	-58.50
Propagation Condition		Config 1,2,3,4,5,6	AWGN

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.8.4.1.1.2 Test Requirements

Following the start of T1, the UE shall detect Cell 2 and determine the relative time difference between Cell 1 and Cell 2. At latest at $T_{RRC_procedure_delay} + T_{measure_SFTD1}$ after the beginning of time duration T1, the UE shall send a measurement report on SFTD between Cell 1 and Cell 2.

The observed rate of successful SFTD reports in repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2\times TTI_{DCCH}$ longer than the measurement reporting delays above due to TTI insertion uncertainty of the measurement report in DCCH.

A.8.4.1.2 E-UTRA – NR Inter-RAT SFTD Measurement Delay in DRX

A.8.4.1.2.1 Test Purpose and Environment

The purpose of this test is to partly verify that measurement reporting delay for SFTD between E-UTRA PCell and inter-RAT NR neighbour cell in FR1 is within the requirements stated in clauses 8.1.2.4.25 and 8.1.2.4.26 of TS 36.133 [15] for E-UTRA FDD and TDD, respectively, when no measurement gaps are provided and DRX is configured.

The tests consist of a single time period of duration T1. Two carriers are used in the tests: one E-UTRA carrier with the PCell (Cell 1), and one NR carrier with the NR neighbour cell (Cell 2).

Prior to the start of time duration T1, the UE is connected to Cell 1 and configured to carry out intra-frequency measurements only. The point in time at which the UE receives, at the UE antenna connector(s), a RRC message containing a measurement configuration for SFTD measurements on RF channel 1 defines the start of time duration

T1. Following the start of T1 the UE shall detect Cell 2, determine the SFN and frame time difference of Cell 2 relative to Cell 1, and send a measurement report.

The supported test configurations are listed in Table A.8.4.1.2.1-1 below. Test parameters are provided in Tables A.8.4.1.2.1-2 below. Cell-specific parameters for the E-UTRA and NR cells are provided in Table A.3.7.2.1-1 in clause A.3.7.2.1, and Table A.8.4.1.1.1-3 in clause A.8.4.1.1.1, respectively.

Table A.8.4.1.2.1-1: Applicable E-UTRA and NR configurations for inter-RAT SFTD measurement delay test in DRX

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.8.4.1.2.1-2: Applicable E-UTRA and NR configurations for inter-RAT SFTD measurement delay test in DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1		One E-UTRAN carrier frequencies is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1		One NR FR1 carrier frequencies is used.
Active cell		Config 1,2,3,4,5,6	Cell 1		Cell 1 is on E-UTRA RF channel number 1.
Neighbour cell		Config 1,2,3,4,5,6	Cell 2		Cell 2 is on NR RF channel number 1.
SSB configuration		Config 1,4	SSB.1 FR1		As specified in clause A.3.10.1
		Config 2,5	SSB.1 FR1		As specified in clause A.3.10.1
		Config 3,6	SSB.2 FR1		As specified in clause A.3.10.1
CP length		Config 1,2,3,4,5,6	Normal		Applicable to both cells.
DRX		Config 1,2,3,4,5,6	DRX.4		DRX configuration as specified in clause A.3.3.4
Frame time offset between serving and neighbour cells	ms	Config 1,2,4,5	3	7	Asynchronous cells. The timing of Cell 2 relative to the timing of Cell 1.
	µs	Config 3,6	3		Synchronous cells.
SFN offset between serving and neighbour cells		Config 1,2,3,4,5,6	0	1	SFN of Cell 2 relative to SFN of Cell 1.
T1	s	Config 1,2,3,4,5,6	1		

A.8.4.1.2.2 Test Requirements

Following the start of T1, the UE shall detect Cell 2 and determine the relative time difference between Cell 1 and Cell 2. At latest at the earliest DRX activity time following upon $T_{RRC_procedure_delay} + T_{measure_SFTD1}$ from the beginning of time duration T1, the UE shall send a measurement report on SFTD between Cell 1 and Cell 2.

The observed rate of successful SFTD reports in repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2\times TTI_{DCCH}$ longer than the measurement reporting delays above due to TTI insertion uncertainty of the measurement report in DCCH.

A.8.4.2 E-UTRA – NR Inter-RAT Measurements

A.8.4.2.1 NR Inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is not used

A.8.4.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.1.2.4.21 of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.1.2.4.22 of TS 36.133 [15] for E-UTRAN TDD-NR measurements.

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 1. The test parameters are given in Tables A.8.4.2.1.1-1, A.8.4.2.1.1-2, A.8.4.2.1.1-3 and A.8.4.2.1.1-4.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.8.4.2.1.1-2 is provided for UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #4 as defined in Table A.8.4.2.1.1-2 is provided for UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) [16] is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.8.4.2.1.1-1: NR inter-RAT event triggered reporting tests without SSB index reading for FR1

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.	

Table A.8.4.2.1.1-2: General test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		1, 2, 3, 4, 5, 6	1		One E-UTRAcarrier frequency is used.
NR RF Chanel Number		1, 2, 3, 4, 5, 6	1		One FR1 NR carrier frequency is used.
Active cell		1, 2, 3, 4, 5, 6	E-UTRA cell 1 (PCell)		E-UTRA cell 1 is on E-UTRA RF channel number 1.
Neighbour cell		1, 2, 3, 4, 5, 6	NR cell 2		NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2, 3, 4, 5, 6	0	4	As specified in clause Table 8.1.2.1-1 of TS 36.133 [15].
Measurement gap offset		1, 2, 3, 4, 5, 6	39	19	As specified in TS 36.331 [16].

b2-Threshold1	dBm	1, 2, 3, 4, 5, 6	Note 1		E-UTRA RSRP threshold for E-UTRA RSRP measurement on cell 1 for event B2 [16]
b2-Threshold2NR	dBm	1, 2, 3, 4, 5, 6	Note 2		SS-RSRP threshold for SS-RSRP measurement on cell 2 for event B2 [16]
Hysteresis	dB	1, 2, 3, 4, 5, 6	0		
CP length		1, 2, 3, 4, 5, 6	Normal		
TimeToTrigger	s	1, 2, 3, 4, 5, 6	0		
Filter coefficient		1, 2, 3, 4, 5, 6	0		L3 filtering is not used
DRX		1, 2, 3, 4, 5, 6	OFF		DRX is not used
Time offset between serving and neighbour cells		1, 4	3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2, 3, 5, 6	3μs		Synchronous cells.
T1	s	1, 2, 3, 4, 5, 6	5		
T2	s	1, 2, 3, 4, 5, 6	1	1	
Note 1: The value of b2-Threshold1 is defined in Table A.8.4.2.1.1-3 Note 2: The value of b2-Threshold2NR is defined in Table A.8.4.2.1.1-4					

Table A.8.4.2.1.1-3: E-UTRAN PCell specific test parameters for NR inter-RAT event triggered reporting in non-DRX with NR neigbour cell in FR1 without SSB time index detection

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6	1	
Duplex mode		1, 2, 3	FDD	
		4, 5, 6	TDD	
TDD special subframe configuration[Note1]		4, 5, 6	6	
TDD uplink-downlink configuration[Note1]		4, 5, 6	1	
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]		1, 2, 3	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	

b2-Threshold1	dBm	1, 2, 3, 4, 5, 6	-77	
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA Note3				
OCNG_RB Note3				
N_{oc} Note4	dBm/15kHz	1, 2, 3, 4, 5, 6	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	17	17
$\hat{E}_s/I_{ot}$ Note5	dB	1, 2, 3, 4, 5, 6	17	17
RSRP Note5	dBm/15kHz	1, 2, 3, 4, 5, 6	-87	-87
SCH_RP Note5	dBm/15kHz	1, 2, 3, 4, 5, 6	-87	-87
Io Note5	dBm/9MHz	1, 2, 3, 4, 5, 6	-59.13+10log ($N_{RB,c}$ /50)	-59.13+10log ($N_{RB,c}$ /50)
Propagation Condition Note6		1, 2, 3, 4, 5, 6	ETU70	
Antenna Configuration and Correlation Matrix Note6		1, 2, 3, 4, 5, 6	1x2 Low	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].

Table A.8.4.2.1.1-4: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
NR RF Channel Number		1, 2, 3, 4, 5, 6	1	
Duplex mode		1, 4	FDD	
		2, 3, 5, 6	TDD	
TDD configuration		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	
$BW_{channel}$	MHz	1, 2, 4, 5	10: $N_{RB,c}$ = 52	
		3, 6	40: $N_{RB,c}$ = 106	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		1, 2, 3, 4, 5, 6	OP.1	
SMTC configuration defined in A.3.11.1 and A.3.11.2		1, 4	SMTC.2	
		2, 3, 5, 6	SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2, 4, 5	15	
		3, 6	30	
b2-Threshold2NR	dBm/SCS	1, 2, 4, 5	-101	
		3, 6	-98	
EPRE ratio of PSS to SSS		1, 2, 3, 4, 5, 6	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				

EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	dBm/15kHz	1, 2, 3, 4, 5, 6	-98	
N_{oc} Note2	dBm/SCS	1, 2, 4, 5	-98	
		3, 6	-95	
SS-RSRP Note 3	dBm/SCS	1, 2, 4, 5	-Infinity	-91
		3, 6	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	1, 2, 3, 4, 5, 6	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	-Infinity	7
Io Note3	dBm/9.36MHz	1, 2, 4, 5	-70.05	-62.26
	dBm/38.16MHz	3, 6	-63.95	-56.16
Propagation Condition		1, 2, 3, 4, 5, 6	TDL-C 300ns 100Hz	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x2 Low	
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				

A.8.4.2.1.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-FR gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 800 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and test 2, the UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.8.4.2.2 NR Inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is used

A.8.4.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.1.2.4.21 of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.1.2.4.22 of TS 36.133 [15] for E-UTRAN TDD-NR measurements.

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 1. The test parameters are given in Tables A.8.4.2.2.1-1, A.8.4.2.2.1-2, A.8.4.2.2.1-3 and A.8.4.2.2.1-4.

In tests 1 and 2, measurement gap pattern configuration # 0 as defined in Table A.8.4.2.2.1-2 is provided for UE that does not support per-FR gap and in tests 3 and 4, measurement gap pattern configuration #4 as defined in Table A.8.4.2.2.1-2 is provided for UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) [16] is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.8.4.2.2.1-1: NR inter-RAT event triggered reporting tests without SSB index reading for FR1

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.	

Table A.8.4.2.2.1-2: General test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
E-UTRA RF Channel Number		1, 2, 3, 4, 5, 6	1				One E-UTRA carrier frequency is used.
NR RF Channel Number		1, 2, 3, 4, 5, 6	1				One FR1 NR carrier frequency is used.
Active cell		1, 2, 3, 4, 5, 6	E-UTRA cell 1 (PCell)				E-UTRA cell 1 is on E-UTRA RF channel number 1.
Neighbour cell		1, 2, 3, 4, 5, 6	NR cell 2				NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2, 3, 4, 5, 6	0		4		As specified in clause Table 8.1.2.1-1 of TS 36.133 [15].
Measurement gap offset		1, 2, 3, 4, 5, 6	39		19		As specified in TS 36.331 [16].
b2-Threshold1	dBm	1, 2, 3, 4, 5, 6	Note 1				E-UTRA RSRP threshold for E-UTRA RSRP measurement on cell 1 for event B2 [16]
b2-Threshold2NR	dBm	1, 2, 3, 4, 5, 6	Note 2				SS-RSRP threshold for SS-RSRP measurement on cell 2 for event B2 [16]
Hysteresis	dB	1, 2, 3, 4, 5, 6	0				
CP length		1, 2, 3, 4, 5, 6	Normal				
TimeToTrigger	s	1, 2, 3, 4, 5, 6	0				
Filter coefficient		1, 2, 3, 4, 5, 6	0				L3 filtering is not used

DRX		1, 2, 3, 4, 5, 6	DRX.9	DRX.12	DRX.9	DRX.12	As specified in clause A.3.3
Time offset between serving and neighbour cells		1, 4	3ms				Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2, 3, 5, 6	3μs				Synchronous cells.
T1	s	1, 2, 3, 4, 5, 6	5				
T2	s	1, 2, 3, 4, 5, 6	2	11	2	11	
Note 1: The value of b2-Threshold1 is defined in Table A.8.4.2.2.1-3 Note 2: The value of b2-Threshold2NR is defined in Table A.8.4.2.2.1-4							

Table A.8.4.2.2.1-3: E-UTRAN PCell specific test parameters for NR inter-RAT event triggered reporting in non-DRX with NR neigbour cell in FR1 without SSB time index detection

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6	1	
Duplex mode		1, 2, 3	FDD	
		4, 5, 6	TDD	
TDD special subframe configuration[Note1]		4, 5, 6	6	
TDD uplink-downlink configuration[Note1]		4, 5, 6	1	
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]		1, 2, 3	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
b2-Threshold1	dBm	1, 2, 3, 4, 5, 6	-77	
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				

PDSCH_RB OCNG_RA Note3 OCNG_RB Note3				
N_{oc} Note4	dBm/15kHz	1, 2, 3, 4, 5, 6	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	17	17
$\hat{E}_s/I_{ot}$ Note5	dB	1, 2, 3, 4, 5, 6	17	17
RSRP Note5	dBm/15kHz	1, 2, 3, 4, 5, 6	-87	-87
SCH_RP Note5	dBm/15kHz	1, 2, 3, 4, 5, 6	-87	-87
Io Note5	dBm/9MHz	1, 2, 3, 4, 5, 6	-59.13+10log ($N_{RB,c}$ /50)	-59.13+10log ($N_{RB,c}$ /50)
Propagation Condition Note6		1, 2, 3, 4, 5, 6	ETU70	
Antenna Configuration and Correlation Matrix Note6		1, 2, 3, 4, 5, 6	1x2 Low	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].

Table A.8.4.2.2.1-4: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
NR RF Channel Number		1, 2, 3, 4, 5, 6	1	
Duplex mode		1, 4	FDD	
		2, 3, 5, 6	TDD	
TDD configuration		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	
$BW_{channel}$	MHz	1, 2, 4, 5	10: $N_{RB,c}$ = 52	
		3, 6	40: $N_{RB,c}$ = 106	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		1, 2, 3, 4, 5, 6	OP.1	
SMTC configuration defined in A.3.11.1 and A.3.11.2		1, 4	SMTC.2	
		2, 3, 5, 6	SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2, 4, 5	15	
		3, 6	30	
b2-Threshold2NR	dBm/SCS	1, 2, 4, 5	-101	
		3, 6	-98	
EPRE ratio of PSS to SSS		1, 2, 3, 4, 5, 6	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
Note2	dBm/15kHz	1, 2, 3, 4, 5, 6	-98	
Note2	dBm/SCS	1, 2, 4, 5	-98	
		3, 6	-95	

SS-RSRP Note 3	dBm/SCS	1, 2, 4, 5	-Infinity	-91
		3, 6	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	1, 2, 3, 4, 5, 6	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	-Infinity	7
Io Note3	dBm/9.36MHz	1, 2, 4, 5	-70.05	-62.26
	dBm/38.16MHz	3, 6	-63.95	-56.16
Propagation Condition		1, 2, 3, 4, 5, 6	TDL-C 300ns 100Hz	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x2 Low	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for $\hat{E}_s/N_{oc}$ to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.8.4.2.2.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 1080 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 10240 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 3 with per-FR gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 1080 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 4 with per-FR gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 10240 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In tests 1, 2, 3 and 4, the UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.8.4.2.3 NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is not used

A.8.4.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.1.2.4.21of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.1.2.4.22 of TS 36.133 [15] for E-UTRAN TDD-NR measurements.

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 1. The test parameters are given in Tables A.8.4.2.3.1-1, A.8.4.2.3.1-2, A.8.4.2.3.1-3 and A.8.4.2.3.1-4.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.8.4.2.3.1-2 is provided for UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #4 as defined in Table A.8.4.2.3.1-2 is provided for UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) [16] is used. In the measurement configuration the UE shall be indicated to report the SSB index of the identified NR cell. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.8.4.2.3.1-1: NR inter-RAT event triggered reporting tests without SSB index reading for FR1

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.	

Table A.8.4.2.3.1-2: General test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		1, 2, 3, 4, 5, 6	1		One E-UTRA carrier frequency is used.
NR RF Channel Number		1, 2, 3, 4, 5, 6	1		One FR1 NR carrier frequency is used.
Active cell		1, 2, 3, 4, 5, 6	E-UTRA cell 1 (PCell)		E-UTRA cell 1 is on E-UTRA RF channel number 1.
Neighbour cell		1, 2, 3, 4, 5, 6	NR cell 2		NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2, 3, 4, 5, 6	0	4	As specified in clause Table 8.1.2.1-1 of TS 36.133 [15].
Measurement gap offset		1, 2, 3, 4, 5, 6	39	19	As specified in TS 36.331 [16].
b2-Threshold1	dBm	1, 2, 3, 4, 5, 6	Note 1		E-UTRA RSRP threshold for E-UTRA RSRP measurement on cell 1 for event B2 [16]
b2-Threshold2NR	dBm	1, 2, 3, 4, 5, 6	Note 2		SS-RSRP threshold for SS-RSRP measurement on cell 2 for event B2 [16]
Hysteresis	dB	1, 2, 3, 4, 5, 6	0		
CP length		1, 2, 3, 4, 5, 6	Normal		
TimeToTrigger	s	1, 2, 3, 4, 5, 6	0		
Filter coefficient		1, 2, 3, 4, 5, 6	0		L3 filtering is not used

DRX		1, 2, 3, 4, 5, 6	OFF		DRX is not used
Time offset between serving and neighbour cells		1, 4	3ms		Asynchronous cells. The timing of Cell 2 is 3 ms later than the timing of Cell 1.
		2, 3, 5, 6	3μs		Synchronous cells.
T1	s	1, 2, 3, 4, 5, 6	5		
T2	s	1, 2, 3, 4, 5, 6	2	1	
Note 1: The value of b2-Threshold1 is defined in Table A.8.4.2.3.1-3 Note 2: The value of b2-Threshold2NR is defined in Table A.8.4.2.3.1-4					

Table A.8.4.2.3.1-3: E-UTRAN PCell specific test parameters for NR inter-RAT event triggered reporting in non-DRX with NR neigbour cell in FR1 without SSB time index detection

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6	1	
Duplex mode		1, 2, 3	FDD	
		4, 5, 6	TDD	
TDD special subframe configuration[Note1]		4, 5, 6	6	
TDD uplink-downlink configuration[Note1]		4, 5, 6	1	
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]		1, 2, 3	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
b2-Threshold1	dBm	1, 2, 3, 4, 5, 6	-77	
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				

OCNG_RA Note3 OCNG_RB Note3				
N_{oc} Note4	dBm/15kHz	1, 2, 3, 4, 5, 6	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	17	17
$\hat{E}_s/I_{ot}$ Note5	dB	1, 2, 3, 4, 5, 6	17	17
RSRP Note5	dBm/15kHz	1, 2, 3, 4, 5, 6	-87	-87
SCH_RP Note5	dBm/15kHz	1, 2, 3, 4, 5, 6	-87	-87
Io Note5	dBm/9MHz	1, 2, 3, 4, 5, 6	-59.13+10log ($N_{RB,c}$ /50)	-59.13+10log ($N_{RB,c}$ /50)
Propagation Condition Note6		1, 2, 3, 4, 5, 6	ETU70	
Antenna Configuration and Correlation Matrix Note6		1, 2, 3, 4, 5, 6	1x2 Low	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].

Table A.8.4.2.3.1-4: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
NR RF Channel Number		1, 2, 3, 4, 5, 6	1	
Duplex mode		1, 4	FDD	
		2, 3, 5, 6	TDD	
TDD configuration		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	
$BW_{channel}$	MHz	1, 2, 4, 5	10: $N_{RB,c}$ = 52	
		3, 6	40: $N_{RB,c}$ = 106	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		1, 2, 3, 4, 5, 6	OP.1	
SMTC configuration defined in A.3.11.1 and A.3.11.2		1, 4	SMTC.2	
		2, 3, 5, 6	SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2, 4, 5	15	
		3, 6	30	
b2-Threshold2NR	dBm/SCS	1, 2, 4, 5	-101	
		3, 6	-98	
EPRE ratio of PSS to SSS		1, 2, 3, 4, 5, 6	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	dBm/15kHz	1, 2, 3, 4, 5, 6	-98	
N_{oc} Note2	dBm/SCS	1, 2, 4, 5	-98	
		3, 6	-95	
SS-RSRP Note 3	dBm/SCS	1, 2, 4, 5	-Infinity	-91

		3, 6	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	1, 2, 3, 4, 5, 6	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	-Infinity	7
Io[Note3]	dBm/9.36MHz	1, 2, 4, 5	-70.05	-62.26
	dBm/38.16MHz	3, 6	-63.95	-56.16
Propagation Condition		1, 2, 3, 4, 5, 6	TDL-C 300ns 100Hz	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x2 Low	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.8.4.2.3.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 1040 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-FR gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and test 2, the UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.8.4.2.4 NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is used

A.8.4.2.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.1.2.4.21of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.1.2.4.22 of TS 36.133 [15] for E-UTRAN TDD-NR measurements.

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 1. The test parameters are given in Tables A.8.4.2.4.1-1, A.8.4.2.4.1-2, A.8.4.2.4.1-3 and A.8.4.2.4.1-4.

In tests 1 and 2, measurement gap pattern configuration # 0 as defined in Table A.8.4.2.4.1-2 is provided for UE that does not support per-FR gap and in tests 3 and 4, measurement gap pattern configuration #4 as defined in Table A.8.4.2.4.1-2 is provided for UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) [16] is used. In the measurement configuration the UE shall be indicated to report the SSB index of the identified NR cell. The test

consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.8.4.2.4.1-1: NR inter-RAT event triggered reporting tests without SSB index reading for FR1

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.	

Table A.8.4.2.4.1-2: General test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
E-UTRA RF Channel Number		1, 2, 3, 4, 5, 6	1				One E-UTRA carrier frequency is used.
NR RF Channel Number		1, 2, 3, 4, 5, 6	1				One FR1 NR carrier frequency is used.
Active cell		1, 2, 3, 4, 5, 6	E-UTRA cell 1 (PCell)				E-UTRA cell 1 is on E-UTRA RF channel number 1.
Neighbour cell		1, 2, 3, 4, 5, 6	NR cell 2				NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2, 3, 4, 5, 6	0		4		As specified in clause Table 8.1.2.1-1 of TS 36.133 [15].
Measurement gap offset		1, 2, 3, 4, 5, 6	39		19		As specified in TS 36.331 [16].
b2-Threshold1	dBm	1, 2, 3, 4, 5, 6	Note 1				E-UTRA RSRP threshold for E-UTRA RSRP measurement on cell 1 for event B2 [16]
b2-Threshold2NR	dBm	1, 2, 3, 4, 5, 6	Note 2				SS-RSRP threshold for SS-RSRP measurement on cell 2 for event B2 [16]
Hysteresis	dB	1, 2, 3, 4, 5, 6	0				
CP length		1, 2, 3, 4, 5, 6	Normal				
TimeToTrigger	s	1, 2, 3, 4, 5, 6	0				
Filter coefficient		1, 2, 3, 4, 5, 6	0				L3 filtering is not used
DRX		1, 2, 3, 4, 5, 6	DRX.9	DRX.12	DRX.9	DRX.12	As specified in clause A.3.3
Time offset between serving and neighbour cells		1, 4	3ms				Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2, 3, 5, 6	3μs				Synchronous cells.
T1	s	1, 2, 3, 4, 5, 6	5				

T2	s	1, 2, 3, 4, 5, 6	2	13	2	13	
Note 1: The value of b2-Threshold1 is defined in Table A.8.4.2.4.1-3 Note 2: The value of b2-Threshold2NR is defined in Table A.8.4.2.4.1-4							

Table A.8.4.2.4.1-3: E-UTRAN PCell specific test parameters for NR inter-RAT event triggered reporting in non-DRX with NR neigbour cell in FR1 without SSB time index detection

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6	1	
Duplex mode		1, 2, 3	FDD	
		4, 5, 6	TDD	
TDD special subframe configuration[Note1]		4, 5, 6	6	
TDD uplink-downlink configuration[Note1]		4, 5, 6	1	
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]		1, 2, 3	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
b2-Threshold1	dBm	1, 2, 3, 4, 5, 6	-77	
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note3]				
OCNG_RB[Note3]				
N_{oc}[Note4]	dBm/15kHz	1, 2, 3, 4, 5, 6	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	17	17
$\hat{E}_s/I_{ot}$[Note5]	dB	1, 2, 3, 4, 5, 6	17	17
RSRP[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6	-87	-87
SCH_RP[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6	-87	-87

Io[Note5]	dBm/9MHz	1, 2, 3, 4, 5, 6	-59.13+10log ($N_{RB,c}$ /50)	-59.13+10log ($N_{RB,c}$ /50)
Propagation Condition [Note6]		1, 2, 3, 4, 5, 6	ETU70	
Antenna Configuration and Correlation Matrix [Note6]		1, 2, 3, 4, 5, 6	1x2 Low	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].

Table A.8.4.2.4.1-4: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
NR RF Channel Number		1, 2, 3, 4, 5, 6	1	
Duplex mode		1, 4	FDD	
		2, 3, 5, 6	TDD	
TDD configuration		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	
$BW_{channel}$	MHz	1, 2, 4, 5	10: $N_{RB,c}$ = 52	
		3, 6	40: $N_{RB,c}$ = 106	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		1, 2, 3, 4, 5, 6	OP.1	
SMTC configuration defined in A.3.11.1 and A.3.11.2		1, 4	SMTC.2	
		2, 3, 5, 6	SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2, 4, 5	15	
		3, 6	30	
b2-Threshold2NR	dBm/SCS	1, 2, 4, 5	-101	
		3, 6	-98	
EPRE ratio of PSS to SSS		1, 2, 3, 4, 5, 6	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	dBm/15kHz	1, 2, 3, 4, 5, 6	-98	
N_{oc} Note2	dBm/SCS	1, 2, 4, 5	-98	
		3, 6	-95	
SS-RSRP [Note 3]	dBm/SCS	1, 2, 4, 5	-Infinity	-91
		3, 6	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	1, 2, 3, 4, 5, 6	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	-Infinity	7
Io[Note3]	dBm/9.36MHz	1, 2, 4, 5	-70.05	-62.26
	dBm/38.16MHz	3, 6	-63.95	-56.16

Propagation Condition		1, 2, 3, 4, 5, 6	TDL-C 300ns 100H
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x2 Low

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.8.4.2.4.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 1280 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 12160 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 3 with per-FR gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 1280 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 4 with per-FR gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 12160 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In tests 1, 2, 3 and 4, the UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.8.4.2.5 NR Inter-RAT event triggered reporting tests for FR2 without SSB time index detection when DRX is not used

A.8.4.2.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.1.2.4.21of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.1.2.4.22 of TS 36.133 [15] for E-UTRAN TDD-NR measurements.

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 1. The test parameters are given in Tables A.8.4.2.5.1-1, A.8.4.2.5.1-2 and A.8.4.2.5.1-3.

The cell specific test parameters for E-UTRA cell1 as PCell are defined in clause A.3.7.2.2.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.8.4.2.5.1-2 is provided for UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #4 as defined in Table A.8.4.2.5.1-2 is provided for UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B1 (Inter RAT neighbour becomes better than threshold) [16] is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have timing information of NR cell 2.

Table A.8.4.2.5.1-1: NR inter-RAT event triggered reporting tests without SSB index reading for FR2 in non-DRX

Configuration	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.	

Table A.8.4.2.5.1-2: General test parameters for NR inter-RAT event triggered reporting for FR2 without SSB time index detection in non-DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		1, 2	1		One E-UTRAcarrier frequency is used.
NR RF Channel Number		1, 2	1		One FR2 NR carrier frequency is used.
Active cell		1, 2	E-UTRA cell 1 (PCell)		E-UTRA cell 1 is on E-UTRA RF channel number 1 as defined in clause A.3.7.2.2.
Neighbour cell		1, 2	NR cell 2		NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2	0	4	As specified in clause Table 8.1.2.1-1 of TS 36.133 [15].
Measurement gap offset		1, 2	39	19	As specified in TS 36.331 [16].
b1-ThresholdNR	dBm	1, 2	Note 1		SS-RSRP threshold for SS-RSRP measurement on cell 2 for event B1 [16]
Hysteresis	dB	1, 2	0		
CP length		1, 2	Normal		
TimeToTrigger	s	1, 2	0		
Filter coefficient		1, 2	0		L3 filtering is not used
DRX		1, 2	OFF		DRX is not used
Time offset between serving and neighbour cells		1	3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3μs		Synchronous cells.
T1	s	1, 2	10		
T2	s	1, 2	6	3	
Note 1: The value of b1-ThresholdNR is defined in Table A.8.4.2.5.1-3					

Table A.8.4.2.5.1-3: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR2 without SSB time index detection in non-DRX

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
AoA setup defined in A.3.15.2.1		1, 2	Setup 2a	
Assumption for UE beams[Note 5]		1, 2	Rough	
NR RF Channel Number		1, 2	1	
Duplex mode		1, 2	TDD	
TDD configuration		1, 2	TDDConf.3.1	
$BW_{channel}$	MHz	1, 2	100: $N_{RB,c}$ = 24	

OCNG patterns defined in A.3.2.1.1			1, 2	OP. 3	
SMTC configuration defined in A.3.11.1 and A.3.11.2			1	SMTC.2	
			2	SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	1, 2	120	
b1-ThresholdNR	UE power class 3	dBm/SCS	1, 2	-112	
EPRE ratio of PSS to SSS			1, 2	0	
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS (Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
$\hat{E}_s$		dBm/SCS	1, 2	- Infinity	-80.6
SS B_RP Note 3		dBm/SCS	1, 2	-Infinity	-80.6
$\hat{E}_s / I_{ot}$ BB Note 6		dB	1, 2	-Infinity	8.3
Io Note3		dBm/95.04MHz	1, 2	-Infinity	-56.0
Propagation Condition			1, 2	AWGN	

Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: SS B_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Void
Note 5: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 6: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

A.8.4.2.5.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event B1 triggered measurement report, with a measurement reporting delay less than D1 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-FR gap, the UE shall send one Event B1 triggered measurement report, with a measurement reporting delay less than D2 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and test 2, the UE is not required to report SSB time index.

Table A.8.4.2.5.2-1: Test requirements for NR inter-RAT event triggered reporting for FR2 without SSB time index detection in non-DRX

Test case	Measurement reporting delay (ms)	
	Test 1: D1 ms	Test 2: D2 ms
UE power class 3	3200	1600

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.8.4.2.6 NR Inter-RAT event triggered reporting tests for FR2 without SSB time index detection when DRX is used

A.8.4.2.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.1.2.4.21of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.1.2.4.22 of TS 36.133 [15] for E-UTRAN TDD-NR measurements.

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 1. The test parameters are given in Tables A.8.4.2.6.1-1, A.8.4.2.6.1-2 and A.8.4.2.6.1-3.

The cell specific test parameters for E-UTRA cell1 as PCell are defined in clause A.3.7.2.2.

In tests 1 and 2, measurement gap pattern configuration # 0 as defined in Table A.8.4.2.6.1-2 is provided for UE that does not support per-FR gap and in tests 3 and 4, measurement gap pattern configuration #4 as defined in Table A.8.4.2.6.1-2 is provided for UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B1 (Inter RAT neighbour becomes better than threshold) [16] is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have timing information of NR cell 2.

Table A.8.4.2.6.1-1: NR inter-RAT event triggered reporting tests without SSB index reading for FR2 in DRX

Configuration	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.	

Table A.8.4.2.6.1-2: General test parameters for NR inter-RAT event triggered reporting for FR2 without SSB time index detection in DRX

Parameter	Unit	Test configuration	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
E-UTRA RF Channel Number		1, 2	1				One E-UTRA carrier frequency is used.
NR RF Channel Number		1, 2	1				One FR2 NR carrier frequency is used.
Active cell		1, 2, 3, 4, 5, 6	E-UTRA cell 1 (PCell)				E-UTRA cell 1 is on E-UTRA RF channel number 1 as defined in clause A.3.7.2.2.
Neighbour cell		1, 2, 3, 4, 5, 6	NR cell 2				NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2, 3, 4, 5, 6	0		4		As specified in clause Table 8.1.2.1-1 of TS 36.133 [15].
Measurement gap offset		1, 2, 3, 4, 5, 6	39		19		As specified in TS 36.331 [16].
b1-ThresholdNR	dBm	1, 2	Note 1				SS-RSRP threshold for SS-RSRP measurement on cell 2 for event B1 [16]

Hysteresis	dB	1, 2, 3, 4, 5, 6	0				
CP length		1, 2, 3, 4, 5, 6	Normal				
TimeToTrigger	s	1, 2, 3, 4, 5, 6	0				
Filter coefficient		1, 2, 3, 4, 5, 6	0				L3 filtering is not used
DRX		1, 2, 3, 4, 5, 6	DRX.9	DRX.12	DRX.9	DRX.12	As specified in clause A.3.3
Time offset between serving and neighbour cells		1	3ms				Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3μs				Synchronous cells.
T1	s	1, 2, 3, 4, 5, 6	5				
T2	s	1, 2, 3, 4, 5, 6	6	83	6	83	
Note 1: The value of b1-ThresholdNR is defined in Table A.8.4.2. 6.1-3							

Table A.8.4.2.6.1-3: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR2 without SSB time index detection in DRX

Parameter		Unit	Test configuration	Cell 2	
				T1	T2
AoA setup defined in A.3.15.1			1, 2	Setup 1	
Assumption for UE beams Note 5			1, 2	Rough	
NR RF Channel Number			1, 2	1	
Duplex mode			1, 2	TDD	
TDD configuration			1, 2	TDDConf.3.1	
$BW_{channel}$		MHz	1, 2	100: $N_{RB,c}$ = 66	
OCNG patterns defined in A.3.2.1.1 (OP.1)			1, 2	OP.1	
SMTC configuration defined in A.3.11.1 and A.3.11.2			1	SMTC.2	
			2	SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	1, 2	120	
b1-ThresholdNR	UE power class 3	dBm/SCS	1, 2	-106	
EPRE ratio of PSS to SSS			1, 2	0	
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS (Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} Note2		dBm/15kHz	1, 2	-104.7	
N_{oc} Note2		dBm/SCS	1, 2	-95.7	
SS-RSRP Note 3		dBm/SCS	1, 2	-Infinity	-87.7
$\hat{E}_s/I_{ot}$		dB	1, 2	-Infinity	8
$\hat{E}_s/N_{oc}$		dB	1, 2	-Infinity	8

Io[Note3]	dBm/95.04MHz	1, 2	-66.7	-58. 0
Propagation Condition		1, 2	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.8.4.2.6.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event B1 triggered measurement report, with a measurement reporting delay less than D1 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-UE gap, the UE shall send one Event B1 triggered measurement report, with a measurement reporting delay less than D2 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 3 with per-FR gap, the UE shall send one Event B1 triggered measurement report, with a measurement reporting delay less than D3 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 4 with per-FR gap, the UE shall send one Event B1 triggered measurement report, with a measurement reporting delay less than D4 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In tests 1, 2, 3 and 4, the UE is not required to report SSB time index.

Table A.8.4.2.6.2-1: Test requirements for NR inter-RAT event triggered reporting for FR2 without SSB time index detection in DRX

Test case	Measurement reporting delay (ms)			
	Test 1: D1 ms	Test 2: D2 ms	Test 3: D3 ms	Test 4: D4 ms
UE power class 3	4800	51200	4800	51200

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.8.4.2.7 NR Inter-RAT event triggered reporting tests for FR2 with SSB time index detection when DRX is not used

A.8.4.2.7.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.1.2.4.21of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.1.2.4.22 of TS 36.133 [15] for E-UTRAN TDD-NR measurements.

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 1. The test parameters are given in Tables A.8.4.2.7.1-1, A.8.4.2.7.1-2 and A.8.4.2.7.1-3.

The cell specific test parameters for E-UTRA cell1 as PCell are defined in clause A.3.7.2.2.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.8.4.2.7.1-2 is provided for UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #4 as defined in Table A.8.4.2.7.1-2 is provided for UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B1 (Inter RAT neighbour becomes better than threshold) [16] is used. In the measurement configuration the UE shall be indicated to report the SSB index of the identified NR cell. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.8.4.2.7.1-1: NR inter-RAT event triggered reporting tests with SSB index reading for FR2 in non-DRX

Configuration	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.	

Table A.8.4.2.7.1-2: General test parameters for NR inter-RAT event triggered reporting for FR2 with SSB time index detection in non-DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Numbers		1, 2	1		One E-UTRA carrier frequency is used.
NR RF Channel Numbers		1, 2	1		One FR2 NR carrier frequency is used.
Active cell		1, 2	E-UTRA cell 1 (PCell)		E-UTRA cell 1 is on E-UTRA RF channel number 1 as defined in clause A.3.7.2.2.
Neighbour cell		1, 2	NR cell 2		NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2	0	4	As specified in clause Table 8.1.2.1-1 of TS 36.133 [15].
Measurement gap offset		1, 2	39	19	As specified in TS 36.331 [16].
b1-ThresholdNR	dBm	1, 2	Note 1		SS-RSRP threshold for SS-RSRP measurement on cell 2 for event B1 [16]
Hysteresis	dB	1, 2	0		
CP length		1, 2	Normal		
TimeToTrigger	s	1, 2	0		
Filter coefficient		1, 2	0		L3 filtering is not used
DRX		1, 2	OFF		DRX is not used
Time offset between serving and neighbour cells		1	3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3μs		Synchronous cells.
T1	s	1, 2	5		
T2	s	1, 2	5	3	
Note 1: The value of b1-ThresholdNR is defined in Table A.8.4.2. 7.1-3					

Table A.8.4.2.7.1-3: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR2 with SSB time index detection in non-DRX

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
AoA setup defined in A.3.15.1		1, 2	Setup 1	
Assumption for UE beams Note 5		1, 2	Rough	
NR RF Channel Number		1, 2	1	
Duplex mode		1, 2	TDD	
TDD configuration		1, 2	TDDConf.3.1	
$BW_{channel}$	MHz	1, 2	100: $N_{RB,c}$ = 66	
OCNG patterns defined in A.3.2.1.1		1, 2	OP.1	
SMTC configuration defined in A.3.11.1 and A.3.11.2		1	SMTC.2	
		2	SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	120	
b1-ThresholdNR UE power class 3	dBm/SCS	1, 2	-106	
EPRE ratio of PSS to SSS		1, 2	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
$\hat{N}_{oc}$ Note2	dBm/15kHz	1, 2	-104.7	
N_{oc} Note2	dBm/SCS	1, 2	-95.7	
SS-RSRP Note 3	dBm/SCS	1, 2	-Infinity	-87.7
$\hat{E}_s/I_{ot}$	dB	1, 2	-Infinity	8
$\hat{E}_s/N_{oc}$	dB	1, 2	-Infinity	8
Io Note3	dBm/95.04MHz	1, 2	-66.7	-58. 0
Propagation Condition		1, 2	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.8.4.2.7.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than D1 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-FR gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than D2 ms from the beginning of time period T2. The UE shall not send event triggered

measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and test 2, the UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

Table A.8.4.2.7.2-1: Test requirements for NR inter-RAT event triggered reporting for FR2 with SSB time index detection in non-DRX

Test case	Measurement reporting delay (ms)	
	Test 1: D1 ms	Test 2: D2 ms
UE power class 3	4160	2080

A.8.4.2.8 NR Inter-RAT event triggered reporting tests for FR2 with SSB time index detection when DRX is used

A.8.4.2.8.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.1.2.4.21 of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.1.2.4.22 of TS 36.133 [15] for E-UTRAN TDD-NR measurements.

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 1. The test parameters are given in Tables A.8.4.2.8.1-1, A.8.4.2.8.1-2 and A.8.4.2.8.1-3.

The cell specific test parameters for E-UTRA cell1 as PCell are defined in clause A.3.7.2.2.

In tests 1 and 2, measurement gap pattern configuration # 0 as defined in Table A.8.4.2.8.1-2 is provided for UE that does not support per-FR gap and in tests 3 and 4, measurement gap pattern configuration #4 as defined in Table A.8.4.2.8.1-2 is provided for UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B1 (Inter RAT neighbour becomes better than threshold) [16] is used. In the measurement configuration the UE shall be indicated to report the SSB index of the identified NR cell. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.8.4.2.8.1-1: NR inter-RAT event triggered reporting tests with SSB index reading for FR2 in DRX

Configuration	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.	

Table A.8.4.2.8.1-2: General test parameters for NR inter-RAT event triggered reporting for FR2 with SSB time index detection in DRX

Parameter	Unit	Test configuration	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
E-UTRA RF Channel Number		1, 2	1				One E-UTRA carrier frequency is used.

NR RF Channel Number		1, 2	1				One FR2 NR carrier frequency is used.
Active cell		1, 2	E-UTRA cell 1 (PCell)				E-UTRA cell 1 is on E-UTRA RF channel number 1 as defined in clause A.3.7.2.2.
Neighbour cell		1, 2	NR cell 2				NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2	0		4		As specified in clause Table 8.1.2.1-1 of TS 36.133 [15].
Measurement gap offset		1, 2	39		19		As specified in TS 36.331 [16].
b1-ThresholdNR	dBm	1, 2	Note 1				SS-RSRP threshold for SS-RSRP measurement on cell 2 for event B1 [16]
Hysteresis	dB	1, 2	0				
CP length		1, 2	Normal				
TimeToTrigger	s	1, 2	0				
Filter coefficient		1, 2	0				L3 filtering is not used
DRX			DRX.9	DRX.12	DRX.9	DRX.12	As specified in clause A.3.3
Time offset between serving and neighbour cells		1	3ms				Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3µs				Synchronous cells.
T1	s	1, 2	5				
T2	s	1, 2	7	70	7	70	
Note 1: The value of b1-ThresholdNR is defined in Table A.8.4.2. 8.1-3							

Table A.8.4.2.8.1-3: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR2 with SSB time index detection

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
AoA setup defined in A.3.15.1		1, 2	Setup 1	
Assumption for UE beams[Note 5]		1, 2	Rough	
NR RF Channel Number		1, 2	1	
Duplex mode		1, 2	TDD	
TDD configuration		1, 2	TDDConf.3.1	
$BW_{channel}$	MHz	1, 2	100: $N_{RB,c}$ = 66	
OCNG patterns defined in A.3.2.1.1		1, 2	OP.1	
SMTC configuration defined in A.3.11.1 and A.3.11.2		1	SMTC.2	
		2	SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	120	
b1-ThresholdNR UE power class 3	dBm/SCS	1, 2	-206	
EPRE ratio of PSS to SSS		1, 2	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} [Note2]	dBm/15kHz	1, 2	-104.7	
N_{oc} [Note2]	dBm/SCS	1, 2	-95.7	
SS-RSRP [Note 3]	dBm/SCS	1, 2	-Infinity	-87.7
$\hat{E}_s/I_{ot}$	dB	1, 2	-Infinity	8
$\hat{E}_s/N_{oc}$	dB	1, 2	-Infinity	8
Io[Note3]	dBm/95.04MHz	1, 2	-66.7	-58. 0
Propagation Condition		1, 2	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.8.4.2.8.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than D1 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than D2 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 3 with per-FR gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than D3 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 4 with per-FR gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than D4 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In tests 1, 2, 3 and 4, the UE is required to report SSB time index.

Table A.8.4.2.8.2-1: Test requirements for NR inter-RAT event triggered reporting for FR2 with SSB time index detection in DRX

Test case	Measurement reporting delay (ms)			
	Test 1: D1 ms	Test 2: D2 ms	Test 3: D3 ms	Test 4: D4 ms
UE power class 3	6240	66560	6240	66560

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.8.4.2.9 NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection in DRX for UE configured with highSpeedInterRAT-NR-r16

A.8.4.2.9.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.1.2.4.21of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.1.2.4.22 of TS 36.133 [15] for E-UTRAN TDD-NR measurements when UE is configured with *highSpeedInterRAT-NR-r16*.

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 1. The test parameters are given in Tables A.8.4.2.9.1-1, A.8.4.2.9.1-2, A.8.4.2.9.1-3 and A.8.4.2.9.1-4.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) [16] is used. In the measurement configuration the UE shall be indicated to report the SSB index of the identified NR cell. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.8.4.2.9.1-1: NR inter-RAT event triggered reporting tests with SSB index reading for FR1 for UE configured with highSpeedInterRAT-NR-r16

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Note 1: The UE is only required to be tested in one of the supported test configurations.

Table A.8.4.2.9.1-2: General test parameters for NR inter-RAT event triggered reporting for FR1 with SSB time index detection for UE configured with highSpeedInterRAT-NR-r16

Parameter	Unit	Test configuration	Value	Comment
E-UTRA RF Channel Number		1, 2, 3, 4, 5, 6	1	One E-UTRA carrier frequency is used.
NR RF Channel Number		1, 2, 3, 4, 5, 6	1	One FR1 NR carrier frequency is used.
Active cell		1, 2, 3, 4, 5, 6	E-UTRA cell 1 (PCell)	E-UTRA cell 1 is on E-UTRA RF channel number 1.
Neighbour cell		1, 2, 3, 4, 5, 6	NR cell 2	NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2, 3, 4, 5, 6	0	As specified in clause Table 8.1.2.1-1 of TS 36.133 [15].
Measurement gap offset		1, 2, 3, 4, 5, 6	39	As specified in TS 36.331 [16].
b2-Threshold1	dBm	1, 2, 3, 4, 5, 6	Note 1	E-UTRA RSRP threshold for E-UTRA RSRP measurement on cell 1 for event B2 [16]
b2-Threshold2NR	dBm	1, 2, 3, 4, 5, 6	Note 2	SS-RSRP threshold for SS-RSRP measurement on cell 2 for event B2 [16]
Hysteresis	dB	1, 2, 3, 4, 5, 6	0	
CP length		1, 2, 3, 4, 5, 6	Normal	
TimeToTrigger	s	1, 2, 3, 4, 5, 6	0	
Filter coefficient		1, 2, 3, 4, 5, 6	0	L3 filtering is not used
DRX		1, 2, 3, 4, 5, 6	DRX.5	As specified in clause A.3.3
Time offset between serving and neighbour cells		1, 4	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2, 3, 5, 6	3µs	Synchronous cells.
T1	s	1, 2, 3, 4, 5, 6	5	
T2	s	1, 2, 3, 4, 5, 6	5	
Note 1: The value of b2-Threshold1 is defined in Table A.8.4.2.9.1-3 Note 2: The value of b2-Threshold2NR is defined in Table A.8.4.2.9.1-4				

Table A.8.4.2.9.1-3: E-UTRAN PCell specific test parameters for NR inter-RAT event triggered reporting with NR neigbour cell in FR1 with SSB time index detection for UE configured with highSpeedInterRAT-NR-r16

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6	1	

Duplex mode		1, 2, 3	FDD	
		4, 5, 6	TDD	
TDD special subframe configuration[Note1]		4, 5, 6	6	
TDD uplink-downlink configuration[Note1]		4, 5, 6	1	
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]		1, 2, 3	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
b2-Threshold1	dBm	1, 2, 3, 4, 5, 6	-77	
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note3]				
OCNG_RB[Note3]				
N_{oc}[Note4]	dBm/15kHz	1, 2, 3, 4, 5, 6	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	17	17
$\hat{E}_s/I_{ot}$[Note5]	dB	1, 2, 3, 4, 5, 6	17	17
RSRP[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6	-87	-87

SCH_RP Note5	dBm/15kHz	1, 2, 3, 4, 5, 6	-87	-87
Io Note5	dBm/9MHz	1, 2, 3, 4, 5, 6	-59.13+10log ($N_{RB,c}$ /50)	-59.13+10log ($N_{RB,c}$ /50)
Propagation Condition Note6		1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix Note6		1, 2, 3, 4, 5, 6	1x2 Low	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].

Table A.8.4.2.9.1-4: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR1 with SSB time index detection for UE configured with highSpeedInterRAT-NR-r16

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
NR RF Channel Number		1, 2, 3, 4, 5, 6	1	
Duplex mode		1, 4	FDD	
		2, 3, 5, 6	TDD	
TDD configuration		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	
$BW_{channel}$	MHz	1, 2, 4, 5	10: $N_{RB,c}$ = 52	
		3, 6	40: $N_{RB,c}$ = 106	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		1, 2, 3, 4, 5, 6	OP.1	
SMTC configuration defined in A.3.11.1 and A.3.11.2		1, 4	SMTC.2	
		2, 3, 5, 6	SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2, 4, 5	15	
		3, 6	30	
b2-Threshold2NR	dBm/SCS	1, 2, 4, 5	-101	
		3, 6	-98	
EPRE ratio of PSS to SSS		1, 2, 3, 4, 5, 6	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				

EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	dBm/15kHz	1, 2, 3, 4, 5, 6	-98	
N_{oc} Note2	dBm/SCS	1, 2, 4, 5	-98	
		3, 6	-95	
SS-RSRP Note 3	dBm/SCS	1, 2, 4, 5	-Infinity	-91
		3, 6	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	1, 2, 3, 4, 5, 6	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	-Infinity	7
Io Note3	dBm/9.36MHz	1, 2, 4, 5	-70.05	-62.26
	dBm/38.16MHz	3, 6	-63.95	-56.16
Propagation Condition		1, 2, 4, 5	AWGN1944	
		3,6	AWGN3334	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x2 Low	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.8.4.2.9.2 Test Requirements

The UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 4.8s from the beginning of time period T2. The UE is required to read the neighbour cell SSB index and report the acquired SSB index in this test.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.8.5 Measurement performance

A.8.5.1 SFTD accuracy

A.8.5.1.1 SFTD accuracy

A.8.5.1.1.1 Test Purpose

The purpose of this set of tests is to verify that the SFTD measurement accuracy is within the specified limits. This test will verify the requirements as specified in clause 9.1.27 in TS 36.133 [15] for inter-RAT FR1 SFTD measurements.

A.8.5.1.1.2 Test Environment

Supported test configurations are shown in Table A.8.5.1.1.2-1. In this set of test cases there are two cells on different carriers. Cell 1 is E-UTRAN PCell and Cell 2 is inter-RAT NR FR1 target cell. The test parameters of cell 1 are given in clause A.8.5.1.1.2-2. The test parameters of cell 2 are given in Table A.8.5.1.1.2-3. The SFTD between PCell and target cell shall be set by the test equipment to one of the time differences in Table A.8.5.1.1.2-4.

Table A.8.5.1.1.2-1: Supported test configurations for SFTD accuracy

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.8.5.1.1.2-2: Test parameters for SFTD accuracy (Cell 1)

Parameter	Unit	Test 1
E-UTRA RF Channel Number		1
Duplex mode		FDD or TDD
TDD special subframe configuration[Note1]		6
TDD uplink-downlink configuration[Note1]		1
$BW_{channel}$		5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100
PDSCH parameters: DL Reference Measurement Channel[Note2]		5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD 5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD 5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD
OCNG Patterns[Note2]		5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD 5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD
PBCH_RA	dB	0
PBCH_RB	dB	
PSS_RA	dB	
SSS_RA	dB	
PCFICH_RB	dB	
PHICH_RA	dB	
PHICH_RB	dB	
PDCCH_RA	dB	
PDCCH_RB	dB	
PDSCH_RA	dB	
PDSCH_RB	dB	
OCNG_RA[Note3]	dB	
OCNG_RB[Note3]	dB	
N_{oc}[Note4]	dBm/15 kHz	-104
$\hat{E}_s/N_{oc}$	dB	-3
$\hat{E}_s/I_{ot}$	dB	-3
RSRP [Note5]	dBm/15 kHz	-107
SCH_RP [Note5]	dBm/15 kHz	-107

Io Note5	dBm/Ch BW	-74.45 +10log ($N_{RB,c}$ /50)
Propagation Condition		AWGN
Antenna Configuration		1x2

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: Es/Iot, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.8.5.1.1.2-3: Test parameters for SFTD accuracy (Cell 2)

Parameter	Config	Unit	Test 1
SSB GSCN	1~6		freq1
Duplex mode	1,4		FDD
	2,5		TDD
	3,6		TDD
TDD Configuration	1,4		N/A
	2,5		TDDConf.1.1
	3,6		TDDConf.2.1
$BW_{channel}$	1,4	MHz	10: $N_{RB,c}$ = 52
	2,5		10: $N_{RB,c}$ = 52
	3,6		40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2,5		SR.1.1 TDD
	3,6		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2,5		CR.1.1 TDD
	3,6		CR.2.1 TDD
RMC CORESET Reference Channel	1,4		CCR.1.1 FDD
	2,5		CCR.1.1 TDD
	3,6		CCR.2.1 TDD
SSB configuration	1,4		SSB.1 FR1
	2,5		SSB.1 FR1
	3,6		SSB.2 FR1
SMTC configuration	1~6		SMTC.1
DL BWP configuration	1~6		DLBWP.1.1
UL BWP configuration	1~6		ULBWP.1.1
OCNG Patterns	1~6		OP.1
EPRE ratio of PSS to SSS	1~6	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			

N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1~6	dBm/15kHz	-104
	NR_FDD_FR1_B			
	NR_TDD_FR1_C			
	NR_FDD_FR1_D, NR_TDD_FR1_D			
	NR_FDD_FR1_E, NR_TDD_FR1_E			
	NR_FDD_FR1_F			
	NR_FDD_FR1_G			
	NR_FDD_FR1_H			
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2,4,5	dBm/SSB SCS	-104
	NR_FDD_FR1_B			
	NR_TDD_FR1_C			
	NR_FDD_FR1_D, NR_TDD_FR1_D			
	NR_FDD_FR1_E, NR_TDD_FR1_E			
	NR_FDD_FR1_F			
	NR_FDD_FR1_G			
	NR_FDD_FR1_H			
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3,6		-101
	NR_FDD_FR1_B			
	NR_TDD_FR1_C			
	NR_FDD_FR1_D, NR_TDD_FR1_D			
	NR_FDD_FR1_E, NR_TDD_FR1_E			
	NR_FDD_FR1_F			
	NR_FDD_FR1_G			
	NR_FDD_FR1_H			
$\hat{E}_s / I_{ot}$		1~6	dB	-3
$\hat{E}_s / N_{oc}$		1~6	dB	-3
SS-RSRP Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2,4,5	dBm/SCS	-107
	NR_FDD_FR1_B			
	NR_TDD_FR1_C			
	NR_FDD_FR1_D, NR_TDD_FR1_D			
	NR_FDD_FR1_E, NR_TDD_FR1_E			
	NR_FDD_FR1_F			
	NR_FDD_FR1_G			
	NR_FDD_FR1_H			
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3,6		-104
	NR_FDD_FR1_B			
	NR_TDD_FR1_C			
	NR_FDD_FR1_D, NR_TDD_FR1_D			
	NR_FDD_FR1_E, NR_TDD_FR1_E			
	NR_FDD_FR1_F			
	NR_FDD_FR1_G			
	NR_FDD_FR1_H			
Io Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2,4,5	dBm/9.36 MHz	-74.28

	NR_FDD_FR1_B			
	NR_TDD_FR1_C			
	NR_FDD_FR1_D, NR_TDD_FR1_D			
	NR_FDD_FR1_E, NR_TDD_FR1_E			
	NR_FDD_FR1_F			
	NR_FDD_FR1_G			
	NR_FDD_FR1_H			
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3,6	dBm/38.16 MHz	-68.18
	NR_FDD_FR1_B			
	NR_TDD_FR1_C			
	NR_FDD_FR1_D, NR_TDD_FR1_D			
	NR_FDD_FR1_E, NR_TDD_FR1_E			
	NR_FDD_FR1_F			
	NR_FDD_FR1_G			
	NR_FDD_FR1_H			
Propagation condition		1~6		AWGN
Antenna configuration		1~6		1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification

Table A.8.5.1.1.2-4: Timing offsets for SFTD accuracy test

Condition	SFN offset between PCell and PSCell	Frame boundary offset between PCell and PSCell (Ts)
1	100	-122000
2	300	-60540
3	500	1000
4	700	62540
5	900	124000

A.8.5.1.1.3 Test Requirements

The SFTD reported by the UE consists of 2 elements, SFN offset and frame boundary offset between PCell and inter-RAT NR target cell. The reported SFTD accuracy shall fulfil the requirement in clause 9.1.27 in TS 36.133 [15].

A.8.5.2 E-UTRA – NR Inter-RAT Measurement Performance requirements

A.8.5.2.1 SS-RSRP

A.8.5.2.1.1 E-UTRAN – NR inter-RAT measurements with FR1 target cell

A.8.5.2.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clause 9.11.1 in TS 36.133 [15] for inter-RAT FR1 SS-RSRP measurements.

A.8.5.2.1.1.2 Test Parameters

Supported test configurations are shown in Table A.8.5.2.1.1.2-1. In this test case there are two cells on different carriers. Cell 1 is the E-UTRA cell which specific test parameters for this test case are specified in Table A.3.7.2.1-1. Cell 2 is the inter-RAT NR FR1 target cell. The absolute accuracy requirements of SS-RSRP inter-RAT measurement is tested by using test parameters in Table A.8.5.2.1.1.2-2.

Table A.8.5.2.1.1.2-1: SS-RSRP Inter-RAT SS-RSRP supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.8.5.2.1.1.2-2: SS-RSRP inter-RAT test parameters

Parameter			Unit	Test 1		Test 2	
				Cell 2		Cell 2	
SSB ARFCN				freq1		freq1	
Duplex mode		Config 1,4		FDD			
		Config 2,3,5,6		TDD			
TDD configuration		Config 1,4		Not Applicable			
		Config 2,5		TDDConf.1.1			
		Config 3,6		TDDConf.2.1			
Downlink initial BWP configuration				DLBWP.0.1			
Uplink initial BWP configuration				ULBWP.0.1			
DRX Cycle configuration			ms	Not Applicable			
PDSCH Reference measurement channel		Config 1,4		-		-	
		Config 2,5					
		Config 3,6					
RMSI CORESET Reference Channel		Config 1,4		-		-	
		Config 2,5					
		Config 3,6					
Dedicated CORESET Reference Channel		Config 1,4		-		-	
		Config 2,5					
		Config 3,6					
OCNG Patterns				OP.1			
SS-RSSI-Measurement				Not Applicable			
SMTC configruation				SMTC.1			
SSB configuration		Config 1,2,4,5		SSB.1 FR1			
		Config 3,6		SSB.2 FR1			
PDSCH/PDCCH subcarrier spacing		Config 1,2,4,5	kHz	15			
		Config 3,6		30			
EPRE ratio of PSS to SSS			dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2	Config 1,2,3,4,5,6	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/15kHz	-94.65		-117	
		NR_FDD_FR1_B				-116.5	
		NR_TDD_FR1_C				-116	
		NR_FDD_FR1_D NR_TDD_FR1_D				-115.5	
		NR_FDD_FR1_E NR_TDD_FR1_E				-115	
		NR_FDD_FR1_F				-114.5	
		NR_FDD_FR1_G				-114	
		NR_FDD_FR1_H				-113.5	
N_{oc} Note2	Config 1,2,4,5		dBm/SCS	-94.65		Same as Noc for 15kHz	
	Config 3,6	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6		-91.65		-114	
		NR_FDD_FR1_B				-113.5	

		NR_TDD_FR1_C			-113
		NR_FDD_FR1_D NR_TDD_FR1_D			-112.5
		NR_FDD_FR1_E NR_TDD_FR1_E			-112
		NR_FDD_FR1_F			-111.5
		NR_FDD_FR1_G			-111
		NR_FDD_FR1_H			-110.5
$\hat{E}_s / I_{ot}$			dB	10	-4
$\hat{E}_s / N_{oc}$			dB	10	-4
SS-RSRP[Note3]	Config 1,2,4,5	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/SCS	-84.65	-121
		NR_FDD_FR1_B			-120.5
		NR_TDD_FR1_C			-120
		NR_FDD_FR1_D NR_TDD_FR1_D			-119.5
		NR_FDD_FR1_E NR_TDD_FR1_E			-119
		NR_FDD_FR1_F			-118.5
		NR_FDD_FR1_G			-118
		NR_FDD_FR1_H			-117.5
	Config 3,6	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6		-81.65	-118
		NR_FDD_FR1_B			-117.5
		NR_TDD_FR1_C			-117
		NR_FDD_FR1_D NR_TDD_FR1_D			-116.5
		NR_FDD_FR1_E NR_TDD_FR1_E			-116
		NR_FDD_FR1_F			-115.5
		NR_FDD_FR1_G			-115
		NR_FDD_FR1_H			-114.5
Io[Note3]	Config 1,2,4,5	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/ 9.36MHz	-56.28	-87.76
		NR_FDD_FR1_B			-87.26
		NR_TDD_FR1_C			-86.76
		NR_FDD_FR1_D NR_TDD_FR1_D			-86.26
		NR_FDD_FR1_E NR_TDD_FR1_E			-85.76
		NR_FDD_FR1_F			-85.26
		NR_FDD_FR1_G			-84.76
		NR_FDD_FR1_H			-84.26
	Config 3,6	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/ 38.16MHz	-50.19	-84.76
		NR_FDD_FR1_B			-84.26
		NR_TDD_FR1_C			-83.76
		NR_FDD_FR1_D NR_TDD_FR1_D			-83.26
		NR_FDD_FR1_E NR_TDD_FR1_E			-82.76
		NR_FDD_FR1_F			-82.26
		NR_FDD_FR1_G			-81.76
		NR_FDD_FR1_H			-81.26
Propagation condition			-	AWGN	

Antenna configuration	-	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.		
Note 3: SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.		
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.		
Note 5: NR operating band groups are as defined in clause 3.5.2.		
Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.		

A.8.5.2.1.1.3 Test Requirements

The SS-RSRP measurement accuracy for Cell 2 shall fulfil the requirement in clause 9.11.1 in TS 36.133 [15].

A.8.5.2.1.2 E-UTRAN – NR inter-RAT measurements with FR2 target cell

A.8.5.2.1.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clause 9.11.1 in TS 36.133 [15] for inter-RAT FR2 SS-RSRP measurements.

A.8.5.2.1.2.2 Test Parameters

Supported test configurations are shown in Table A.8.5.2.1.2.2-1. In this test case there are two cells on different carriers. Absolute accuracy requirements of SS-RSRP inter-RAT measurement are tested by using test setup in Table A.8.5.2.1.2.2-2 and Table A.8.5.2.1.2.2-3. In all test cases, Cell 2 is target cell. Cell 1 is the E-UTRA cell which specific test parameters for this test case are specified in Table A.3.7.2.1-1.

Table A.8.5.2.1.2.2-1: SS-RSRP Inter-RAT SS-RSRP supported test configurations

Configuration	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.8.5.2.1.2.2-2: SS-RSRP Inter-RAT general test parameters

Parameter	Unit	Test 1	Test 2
		Cell 2	Cell 2
SSB ARFCN		Freq1	freq1
Duplex mode		TDD	TDD
TDD configuration		TDDConf.3.1	TDDConf.3.1
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66	100: $N_{RB,c}$ = 66
Downlink initial BWP configuration		DLBWP.0.1	
Uplink initial BWP configuration		ULBWP.0.1	
DRX cycle configuration	ms	Not applicable	
PDSCH Reference measurement channel		-	-
RMSI CORESET Reference Channel		-	-
OCNG Patterns		OP.1	OP.1
SMTC configuration		SMTC.1	SMTC.1
SSB configuration		SSB.3 FR2	SSB.3 FR2
PDSCH/PDCCH subcarrier spacing	kHz	120	120
EPRE ratio of PSS to SSS	dB	0	0
EPRE ratio of PBCH_DMRS to SSS			
EPRE ratio of PBCH to PBCH_DMRS			

EPRE ratio of PDCCH_DMRS to SSS			
EPRE ratio of PDCCH to PDCCH_DMRS			
EPRE ratio of PDSCH_DMRS to SSS			
EPRE ratio of PDSCH to PDSCH_DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: Void
Note 4: Void

Table A.8.5.2.1.2.2-3: SS-RSRP Inter-RAT OTA related test parameters

Parameter	Unit	Test 1	Test 2
		Cell 2	Cell 2
Angle of arrival configuration		Setup 1 according to A.3.15.1	Setup 1 according to A.3.15.1
Assumption for UE beams Note 10		Rough	Rough
N_{oc} Note1	dBm/15kHz Note4	-105	N/A
N_{oc} Note1	dBm/SCS Note4	-96	N/A
Es	dBm/SCS Note4		(Table B.2.3-2 Rx Beam Peak +1dB) (Note 7)
$\hat{E}_s / N_{oc}$	dB	11	N/A
SSB_RP Note2	dBm/SCS Note4	-85	(Table B.2.3-2 Rx Beam Peak +1dB) (Note 7)
$\hat{E}_s / I_{ot}$ BB Note 2, Note 9	dB	9.97	-3.81
Io Note2	dBm/95.04 MHz Note4	-55.65	(Table B.2.3-2 Rx Beam Peak +30dB) (Note 8)

Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SSB_RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: Void
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone.
Note 5: Void
Note 6: Void
Note 7: SSB_RP is applied at 1dB above the minimum level specified in Table B.2.3-2 for beam peak.
Note 8: Io is applied at $10\log_{10}(792)$dB+1dB above the minimum level specified in Table B.2.3-2 for beam peak.
Note 9: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.
Note 10: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.

A.8.5.2.1.2.3 Test Requirements

The SS-RSRP measurement accuracy for Cell 2 shall fulfil the requirement in clause 9.11.1 in TS 36.133 [15].

A.8.5.2.2 SS-RSRQ

A.8.5.2.2.1 E-UTRAN – NR inter-RAT measurements with FR1 target cell

A.8.5.2.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in clause 9.11.2 in TS 36.133 [15] for inter-RAT FR1 SS-RSRQ measurements.

A.8.5.2.2.1.2 Test Parameters

Supported test configurations are shown in Table A.8.5.2.2.1.2-1. In this test case there are two cells on different carriers. Cell 1 is the E-UTRA cell which specific test parameters for this test case are specified in Table A.3.7.2.1-1. Cell 2 is the inter-RAT NR FR1 target cell. The absolute accuracy requirements of SS-RSRP inter-RAT measurement is tested by using test parameters in Table A.8.5.2.2.1.2-2.

Table A.8.5.2.2.1.2-1: SS-RSRQ Inter-RAT SS-RSRQ supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.8.5.2.2.1.2-2: SS-RSRQ inter-RAT test parameters

Parameter			Unit	Test 1		Test 2		Test 3	
				Cell 2		Cell 2		Cell 2	
SSB ARFCN				freq1		freq1		freq1	
Duplex mode	Config 1,4			FDD					
	Config 2,3,5,6			TDD					
TDD configuration	Config 1,4			Not Applicable					
	Config 2,5			TDDConf.1.1					
	Config 3,6			TDDConf.2.1					
Downlink initial BWP configuration				DLBWP.0.1					
Uplink initial BWP configuration				ULBWP.0.1					
DRX Cycle configuration			ms	Not Applicable					
PDSCH Reference measurement channel	Config 1,4			-		-		-	
	Config 2,5								
	Config 3,6								
RMSI CORESET Reference Channel	Config 1,4			-		-		-	
	Config 2,5								
	Config 3,6								
Dedicated CORESET Reference Channel	Config 1,4			-		-		-	
	Config 2,5								
	Config 3,6								
OCNG Patterns				OP.1					
SS-RSSI-Measurement				Not Applicable					
SMTC configruation				SMTC.1					
SSB configuration	Config 1,2,4,5			SSB.1 FR1					
	Config 3,6			SSB.2 FR1					
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5		kHz	15					
	Config 3,6			30					
EPRE ratio of PSS to SSS			dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2	Config 1,2,4,5	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/15kHz	-80.18		-106		-116	
		NR_FDD_FR1_B						-115.5	
		NR_TDD_FR1_C						-115	
		NR_FDD_FR1_D NR_TDD_FR1_D						-114.5	
		NR_FDD_FR1_E NR_TDD_FR1_E						-114	
		NR_FDD_FR1_F						-113.5	
		NR_FDD_FR1_G						-113	
		NR_FDD_FR1_H						-112.5	
	Config 3,6			-86.27		-113		Same as Noc for Config 1,2,4,5	
N_{oc} Note2	Config 1,2,4,5		dBm/SCS	-80.18		-106		Same as Noc for 15kHz	
	Config 3,6	NR_FDD_FR1_A		-83.27		-110		-113	

		NR_TDD_FR1_A NOTE 6				
		NR_FDD_FR1_B				-112.5
		NR_TDD_FR1_C				-112
		NR_FDD_FR1_D NR_TDD_FR1_D				-111.5
		NR_FDD_FR1_E NR_TDD_FR1_E				-111
		NR_FDD_FR1_F				-110.5
		NR_FDD_FR1_G				-110
		NR_FDD_FR1_H				-109.5
$\hat{E}_s / I_{ot}$			dB	-1.75	-1.75	-1.75
$\hat{E}_s / N_{oc}$			dB	-1.75	-1.75	-1.75
SS-RSRP Note3	Config 1,2,4,5	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/SCS	-81.93	-107.75	-117.75
		NR_FDD_FR1_B				-117.25
		NR_TDD_FR1_C				-116.75
		NR_FDD_FR1_D NR_TDD_FR1_D				-116.25
		NR_FDD_FR1_E NR_TDD_FR1_E				-115.75
		NR_FDD_FR1_F				-115.25
		NR_FDD_FR1_G				-114.75
		NR_FDD_FR1_H				-114.25
	Config 3,6	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6		-85.02	-111.75	-114.75
		NR_FDD_FR1_B				-114.25
		NR_TDD_FR1_C				-113.75
		NR_FDD_FR1_D NR_TDD_FR1_D				-113.25
		NR_FDD_FR1_E NR_TDD_FR1_E				-112.75
		NR_FDD_FR1_F				-112.25
		NR_FDD_FR1_G				-111.75
		NR_FDD_FR1_H				-111.25
SS-RSRQ Note3		NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dB	-14.77	-40.59	-14.76
		NR_FDD_FR1_B				
		NR_TDD_FR1_C				
		NR_FDD_FR1_D NR_TDD_FR1_D				
		NR_FDD_FR1_E NR_TDD_FR1_E				
		NR_FDD_FR1_F				
		NR_FDD_FR1_G				
		NR_FDD_FR1_H				
Io Note3	Config 1,2,4,5	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/ 9.36MHz	-50	-75.83	-85.83
		NR_FDD_FR1_B				-85.33
		NR_TDD_FR1_C				-84.83
		NR_FDD_FR1_D NR_TDD_FR1_D				-84.33
		NR_FDD_FR1_E NR_TDD_FR1_E				-83.83
		NR_FDD_FR1_F				-83.33

		NR_FDD_FR1_G				-82.83
		NR_FDD_FR1_H				-82.33
	Config 3,6	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/ 38.16MHz	-50	-76.73	-79.73
		NR_FDD_FR1_B				-79.23
		NR_TDD_FR1_C				-78.73
		NR_FDD_FR1_D NR_TDD_FR1_D				-78.23
		NR_FDD_FR1_E NR_TDD_FR1_E				-77.73
		NR_FDD_FR1_F				-77.23
		NR_FDD_FR1_G				-76.73
		NR_FDD_FR1_H				-76.53
Propagation condition			-	AWGN		
Antenna configuration			-	1x2		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRQ, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRQ minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: NR operating band groups are as defined in clause 3.5.2.
Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

A.8.5.2.2.1.3 Test Requirements

The SS-RSRQ measurement accuracy for Cell 2 shall fulfil the requirement in clause 9.11.2 in TS 36.133 [15].

A.8.5.2.2.2 E-UTRAN – NR inter-RAT measurements with FR2 target cell

A.8.5.2.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in clause 9.11.2 in TS 36.133 [15] for inter-RAT FR2 SS-RSRQ measurements.

A.8.5.2.2.2.2 Test Parameters

Supported test configurations are shown in Table A.8.5.2.2.2.2-1. In this test case there are two cells on different carriers. Absolute accuracy requirements of SS-RSRQ inter-RAT measurement are tested by using test setup in Table A.8.5.2.2.2.2-2 and Table A.8.5.2.2.2.2-3. In all test cases, Cell 2 is target cell. Cell 1 is the E-UTRA cell which specific test parameters for this test case are specified in Table A.3.7.2.1-1.

Table A.8.5.2.2.2.2-1: SS-RSRQ Inter-RAT SS-RSRQ supported test configurations

Configuration	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.8.5.2.2.2.2-2: SS-RSRQ Inter-RAT general test parameters

Parameter	Unit	Test 1	Test 2
		Cell 2	Cell 2
SSB ARFCN		Freq1	freq1
Duplex mode		TDD	TDD

TDD configuration		TDDConf.3.1	TDDConf.3.1
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66	100: $N_{RB,c}$ = 66
Downlink initial BWP configuration		DLBWP.0.1	
Uplink initial BWP configuration		ULBWP.0.1	
DRX cycle configuration	ms	Not applicable	
PDSCH Reference measurement channel		-	-
RMSI CORESET Reference Channel		-	-
OCNG Patterns		OP.1	OP.1
SMTC configuration		SMTC.1	SMTC.1
SSB configuration		SSB.3 FR2	SSB.3 FR2
PDSCH/PDCCH subcarrier spacing	kHz	120	120
EPRE ratio of PSS to SSS	dB	0	0
EPRE ratio of PBCH_DMRS to SSS			
EPRE ratio of PBCH to PBCH_DMRS			
EPRE ratio of PDCCH_DMRS to SSS			
EPRE ratio of PDCCH to PDCCH_DMRS			
EPRE ratio of PDSCH_DMRS to SSS			
EPRE ratio of PDSCH to PDSCH_DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Void Note 3: Void Note 4: Void			

Table A.8.5.2.2.2.2-3: SS-RSRQ Inter-RAT OTA related test parameters

Parameter	Unit	Test 1	Test 2
		Cell 2	Cell 2
Angle of arrival configuration		Setup 1 according to A.3.15.1	Setup 1 according to A.3.15.1
Assumption for UE beams Note 10		Rough	Rough
N_{oc} Note1	dBm/15kHz Note4	-104.7	(Table B.2.3-2 Rx Beam Peak -5dB) (Note 7)
N_{oc} Note1	dBm/SCS Note4	-95.7	(Table B.2.3-2 Rx Beam Peak +4dB) (Note 7)
$\hat{E}_s / N_{oc}$	dB	-0.5	-1.75
SSB_RP Note2	dBm/SCS Note4	-96.2	(Table B.2.3-2 Rx Beam Peak +2.25dB) (Note 8)
SS-RSRQ Note2	dB	-3.27	-14.82
$\hat{E}_s / I_{ot}$ Note2	dB	-0.5	-1.75
Io Note2	dBm/95.04 MHz Note4	-63.95	(Table B.2.3-2 Rx Beam Peak +35.22dB) (Note 9)
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: SSB_RP, SS-RSRQ, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: Void Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone.			

Note 5:	Void
Note 6:	Void
Note 7:	N_{oc} for SCS 15kHz is applied at -10log$_{10}$(8)+4dB above the minimum level specified in Table B.2.3-2 for beam peak. N_{oc} for SCS 120kHz is applied at 4dB above the minimum level specified in Table B.2.3-2 for beam peak.
Note 8:	SSB_RP is applied at 2.25dB above the minimum level specified in Table B.2.3-2 for beam peak.
Note 9:	Io is applied at 10log$_{10}$(792)+6.22dB above the minimum level specified in Table B.2.3-2 for beam peak.
Note 10:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.

A.8.5.2.2.2.3 Test Requirements

The SS-RSRQ measurement accuracy for Cell 2 shall fulfil the requirement in clause 9.11.2 in TS 36.133 [15].

In this test case there are two cells on different carriers and measurement gaps are provided

A.8.5.2.3 SS-SINR

A.8.5.2.3.1 E-UTRAN – NR inter-RAT measurements with FR1 target cell

A.8.5.2.3.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS- SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 9.11.3 in TS 36.133 [15] for inter-RAT FR1 SS-SINR measurements.

A.8.5.2.3.1.2 Test Parameters

Supported test configurations are shown in Table A.8.5.2.3.1.2-1. In this test case there are two cells on different carriers. Cell 1 is the E-UTRA cell which specific test parameters for this test case are specified in Table A.3.7.2.1-1. Cell 2 is the inter-RAT NR FR1 target cell. The absolute accuracy requirements of SS-RSRP inter-RAT measurement is tested by using test parameters in Table A.8.5.2.3.1.2-2.

Table A.8.5.2.3.1.2-1: SS- SINR Inter-RAT SS- SINR supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.8.5.2.3.1.2-2: SS-SINR inter-RAT test parameters

Parameter		Unit	Test 1	Test 2	Test 3
			Cell 2	Cell 2	Cell 2
SSB ARFCN			freq1	freq1	freq1
Duplex mode	Config 1,4		FDD		
	Config 2,3,5,6		TDD		
TDD configuration	Config 1,4		Not Applicable		
	Config 2,5		TDDConf.1.1		
	Config 3,6		TDDConf.2.1		
Downlink initial BWP configuration			DLBWP.0.1		
Uplink initial BWP configuration			ULBWP.0.1		
DRX Cycle configuration		ms	Not Applicable		

PDSCH Reference measurement channel	Config 1,4			-		-		-	
	Config 2,5								
	Config 3,6								
RMSI CORESET Reference Channel	Config 1,4			-		-		-	
	Config 2,5								
	Config 3,6								
Dedicated CORESET Reference Channel	Config 1,4			-		-		-	
	Config 2,5								
	Config 3,6								
OCNG Patterns				OP.1					
SS-RSSI-Measurement				Not Applicable					
SMTC configuration				SMTC.1					
SSB configuration	Config 1,2,4,5			SSB.1 FR1					
	Config 3,6			SSB.2 FR1					
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5		kHz	15					
	Config 3,6			30					
EPRE ratio of PSS to SSS			dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2	Config 1,2,4,5	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/15kHz	-880		-108.5		-119.5	
		NR_FDD_FR1_B						-119	
		NR_TDD_FR1_C						-118.5	
		NR_FDD_FR1_D NR_TDD_FR1_D						-118	
		NR_FDD_FR1_E NR_TDD_FR1_E						-117.5	
		NR_FDD_FR1_F						-117	
		NR_FDD_FR1_G						-116.5	
		NR_FDD_FR1_H						-116	
N_{oc} Note2	Config 1,2,4,5		dBm/SCS	[-80]		-88		-108.5	
	Config 3,6	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6		-85		-105.5		-116.5	
		NR_FDD_FR1_B						-116	
		NR_TDD_FR1_C						-115.5	
		NR_FDD_FR1_D NR_TDD_FR1_D						-115	
		NR_FDD_FR1_E NR_TDD_FR1_E						-114.5	
		NR_FDD_FR1_F						-114	
		NR_FDD_FR1_G						-114.5	
		NR_FDD_FR1_H						-113]	
$\hat{E}_s / I_{ot}$			dB	-1.75		20		-4.0	
$\hat{E}_s / N_{oc}$			dB	-1.75		20		-4.0	

SS-RSRP Note3	Config 1,2,4,5	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/SCS	-89.75	-88.5	-123.5
		NR_FDD_FR1_B				-123
		NR_TDD_FR1_C				-122.5
		NR_FDD_FR1_D NR_TDD_FR1_D				-122
		NR_FDD_FR1_E NR_TDD_FR1_E				-121.5
		NR_FDD_FR1_F				-121
		NR_FDD_FR1_G				-120.5
		NR_FDD_FR1_H				-120
	Config 3,6	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6		-86.75	-85.5	-120.5
		NR_FDD_FR1_B				-120
		NR_TDD_FR1_C				-119.5
		NR_FDD_FR1_D NR_TDD_FR1_D				-119
		NR_FDD_FR1_E NR_TDD_FR1_E				-118.5
		NR_FDD_FR1_F				-118
		NR_FDD_FR1_G				-117.5
		NR_FDD_FR1_H				-117
SS-SINR Note3		NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dB	-1.75	20	-4.0
		NR_FDD_FR1_B				
		NR_TDD_FR1_C				
		NR_FDD_FR1_D NR_TDD_FR1_D				
		NR_FDD_FR1_E NR_TDD_FR1_E				
		NR_FDD_FR1_F				
		NR_FDD_FR1_G				
		NR_FDD_FR1_H				
Io Note3	Config 1,2,4,5	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/ 9.36MHz	-57.83	-60.5	-90.09
		NR_FDD_FR1_B				-89.59
		NR_TDD_FR1_C				-89.09
		NR_FDD_FR1_D NR_TDD_FR1_D				-88.59
		NR_FDD_FR1_E NR_TDD_FR1_E				-88.09
		NR_FDD_FR1_F				-87.59
		NR_FDD_FR1_G				-87.09
		NR_FDD_FR1_H				-86.59
	Config 3,6	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/ 38.16MHz	-51.73	-54.41	-84
		NR_FDD_FR1_B				-83.5
		NR_TDD_FR1_C				-83
		NR_FDD_FR1_D NR_TDD_FR1_D				-82.5
		NR_FDD_FR1_E NR_TDD_FR1_E				-82
		NR_FDD_FR1_F				-81.5
		NR_FDD_FR1_G				-81
		NR_FDD_FR1_H				-80.5

Propagation condition	-	AWGN
Antenna configuration	-	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: NR operating band groups are as defined in clause 3.5.2.

Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

A.8.5.2.3.1.3 Test Requirements

The SS-SINR measurement accuracy for Cell 2 shall fulfil the requirement in clause 9.11.3 in TS 36.133 [15].

A.8.5.2.3.2 E-UTRAN – NR inter-RAT measurements with FR2 target cell

A.8.5.2.3.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS- SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 9.11.3 in TS 36.133 [15] for inter-RAT FR2 SS-SINR measurements.

A.8.5.2.3.2.2 Test Parameters

Supported test configurations are shown in Table A.8.5.2.3.2.2-1. In this test case there are two cells on different carriers. Absolute accuracy requirements of SS-SINR inter-RAT measurement are tested by using test setup in Table A.8.5.2.3.2.2-2 and A.8.5.2.3.2.2-3. In all test cases, Cell 2 is target cell. Cell 1 is the E-UTRA cell which specific test parameters for this test case are specified in Table A.3.7.2.1-1.

Table A.8.5.2.3.2.2-1: SS-SINR Inter-RAT SS-SINR supported test configurations

Configuration	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.8.5.2.3.2.2-2: SS-SINR Inter-RAT general test parameters

Parameter	Unit	Test 1	Test 2	Test 3
		Cell 2	Cell 2	Cell 2
SSB ARFCN		Freq1	freq1	freq1
Duplex mode		TDD	TDD	TDD
TDD configuration		TDDConf.3.1	TDDConf.3.1	TDDConf.3.1
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66	100: $N_{RB,c}$ = 66	100: $N_{RB,c}$ = 66
Downlink initial BWP configuration		DLBWP.0.1		
Uplink initial BWP configuration		ULBWP.0.1		
DRX cycle configuration	ms	Not applicable		
PDSCH Reference measurement channel		-	-	-
RMSI CORESET Reference Channel		-	-	-
OCNG Patterns		OP.1	OP.1	OP.1
SMTC configuration		SMTC.1	SMTC.1	SMTC.1
SSB configuration		SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0
EPRE ratio of PBCH_DMRS to SSS				
EPRE ratio of PBCH to PBCH_DMRS				

EPRE ratio of PDCCH_DMRS to SSS				
EPRE ratio of PDCCH to PDCCH_DMRS				
EPRE ratio of PDSCH_DMRS to SSS				
EPRE ratio of PDSCH to PDSCH_DMRS				
EPRE ratio of OCNG DMRS to SSS Note 1				

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: Void
Note 4: Void

Table A.8.5.2.3.2.2-3: SS-SINR Inter-RAT OTA related test parameters

Parameter	Unit	Test 1	Test 2	Test 3
		Cell 2	Cell 2	Cell 2
Angle of arrival configuration		Setup 1 according to A.3.15.1	Setup 1 according to A.3.15.1	Setup 1 according to A.3.15.1
Assumption for UE beams Note 10		Rough	Rough	Rough
N_{oc} Note1	dBm/15kHz Note4	-104.7	-104.7	(Table B.2.3-2 Rx Beam Peak -5dB) (Note 7)
N_{oc} Note1	dBm/SCS Note4	-95.7	-95.7	(Table B.2.3-2 Rx Beam Peak +4dB) (Note 7)
$\hat{E}_s / N_{oc}$	dB	-0.5	11	-1.0
SSB_RP Note2	dBm/SCS Note4	-96. 2	-84.7	(Table B.2.3-2 Rx Beam Peak +3dB) (Note 8)
SS-SINR Note2	dB	-0.5	11	-1.0
$\hat{E}_s / I_{ot}$ Note2	dB	-0.5	11	-1.0
Io Note2	dBm/95.04 MHz Note4	-63.95	-55.38	(Table B.2.3-2 Rx Beam Peak +35.54dB) (Note 9)

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SSB_RP, SS-SINR, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: Void
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone.
Note 5: Void
Note 6: Void
Note 7: N_{oc} for SCS 15kHz is applied at $-10\log_{10}(8)+4$dB above the minimum level specified in Table B.2.3-2 for beam peak. N_{oc} for SCS 120kHz is applied at 4dB above the minimum level specified in Table B.2.3-2 for beam peak.
Note 8: SSB_RP is applied at 3dB above the minimum level specified in Table B.2.3-2 for beam peak.
Note 9: Io is applied at level $10\log_{10}(792)+6.54$dB above the minimum level specified in Table B.2.3-2 for beam peak.
Note 10: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.

A.8.5.2.3.2.3 Test Requirements

The SS-SINR measurement accuracy for Cell 2 shall fulfil the requirement in clause 9.11.3 in TS 36.133 [15].

A.9 V2X Tests

A.9.1 V2X Tests in FR1

A.9.1.1 Test for V2X UE Transmit Timing

A.9.1.1.1 Test for GNSS as Synchronization Reference Source

A.9.1.1.1.1 Test Purpose and Environment

The purpose of this test is to verify the UE timing requirements as specified in clause 12.2.2, when the GNSS is used as timing reference. For this test, the UE is triggered by the test loop function to transmit for V2X sidelink communication.

Table A.9.1.1.1.1-1 defines test parameters for UE transmit timing accuracy tests for V2X. There is one GNSS based synchronization source during the test. The test system can emulate and send the GNSS signal to the test UE. The test parameters for GNSS signals are defined in B.4.1.

Table A.9.1.1.1.1-1: V2X Sidelink Test Parameters for UE Transmit Timing Tests for GNSS as Timing Reference

Parameter	Unit	Value	Comment
RF Channel Number		1	HD carrier in Band n47 or n38
Channel Bandwidth ($BW_{channel}$) Note 1	MHz	20 ($N_{RB,c}$ = 50) or 40 ($N_{RB,c}$ = 100)	
SCS	kHz	30	
Active cell		None	
Active SyncRef UE		None	
V2X sidelink communication preconfiguration		As specified in section A.3.21.2	IE values unless specified otherwise in this test.
PSCCH Reference Measurement Channel		CC.1A HD	As specified in Table A.3.21.3-1
PSSCH Reference Measurement Channel		CD.1A HD	As specified in Table A.3.21.3-2
Propagation condition		AWGN	
Note 1: The UE is only required to be tested in one of the supported test configurations.			

A.9.1.1.1.2 Test requirements

For parameters specified in Tables A.9.1.1.1-1, the timing accuracy for V2X sidelink transmission shall be within the limits defined in clause 12.2.2. The timing accuracy is verified by using PSSCH transmissions.

A.9.1.1.2 Test for SyncRef UE as Synchronization Reference Source

A.9.1.1.2.1 Test Purpose and Environment

The purpose of this test is to verify the timing requirements for V2X sidelink transmissions specified in clause 12.2.5, when SyncRef UE is used as timing reference. For this test, the UE is triggered by the test loop function to transmit for V2X sidelink communication.

Table A.9.1.1.2.1-1 defines test parameters for UE transmit timing accuracy tests for V2X sidelink Communication. There is one active SyncRef UE in this test without either serving cell and or GNSS signals. Before the test starts, the UE has been synchronized to the SyncRef UE. The transmit timing accuracy is verified by using the transmission timing of PSSCH transmissions.

Table A.9.1.1.2.1-1: General Test Parameters for V2X UE Transmit Timing Test for SyncRef UE as Timing Reference

Parameter		Unit	Value	Comment
RF Channel Number			1	HD carrier in Band n47 or n38
Channel Bandwidth ($BW_{channel}$) Note 3		MHz	20 ($N_{RB,c}$ = 50) or 40 ($N_{RB,c}$ = 100)	
SCS		kHz	30	
Active cell			None	
Active SyncRef UE			SyncRef UE 1	Transmitting S-SSB on RF channel number 1
V2X sidelink communication preconfiguration			As specified in section A.3.21.2	IE values unless specified otherwise in this test.
PSCCH Reference Measurement Channel			CC.1A HD	As specified in Table A.3.21.3-1
PSSCH Reference Measurement Channel			CD.1A HD	As specified in Table A.3.21.3-2
N_{oc} Note1,2		dBm/30kHz	-95	
SyncRef UE 1	sl-SSB-TimeAllocation		sl-SSB-TimeAllocation1	
	slssid		30	
	inCoverage		TRUE	In MIB-SL
	networkControlledSyncTx		ON	
	V2X sidelink communication configuration		As specified in section A.3.21.2	IE values unless specified otherwise in this test.
	$\hat{E}_s / N_{oc}$		3	
	PSBCH-RSRP Note1, Note 2	dBm/30kHz	-92	
Propagation condition			AWGN	

Note 1: PSBCH-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 2: S-PSS E_s/N_{oc} and S-SSS E_s/N_{oc} are set the same as PSBCH E_s/N_{oc}.
Note 3: The UE is only required to be tested in one of the supported test configurations.

A.9.1.1.2.2 Test requirements

For parameters specified in Tables A.9.1.1.2.1-1, the timing accuracy for V2X sidelink transmission shall be within the limits defined in clause 12.2.5. The timing accuracy is verified by using PSSCH transmissions.

A.9.1.1.3 Test for FR1 NR Cell as Synchronization Reference Source

A.9.1.1.3.1 Test Purpose and Environment

The purpose of this test is to verify the timing requirements for V2X sidelink transmissions specified in clause 12.2.3, when the downlink timing of the serving cell (RRC_IDLE) or PCell (RRC_CONNECTED) on a non-V2X sidelink carrier is used as timing reference. For this test, the UE is triggered by the test loop function or the upper layers to transmit for V2X sidelink communication.

This test is applicable for V2X sidelink communication capable UEs that support NR Uu and sidelink operation.

Table A.9.1.1.3.1-1, A.9.1.1.3.1-2 and A.9.1.1.3.1-3 define test parameters for UE transmit timing accuracy tests for V2X sidelink Communication. There is one active cell (PCell) in this test. The transmit timing accuracy is verified by using the transmission timing of PSSCH transmissions.

Table A.9.1.1.3.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	NR Uu: FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NR Uu: TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
3	NR Uu: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.9.1.1.3.1-2: V2X Sidelink Test Parameters for V2X UE Transmit Timing Accuracy Test for gNB as Timing Reference

Parameter	Unit	Value	Comment
RF Channel Number		1	HD carrier in Band n47 or n38
Channel Bandwidth ($BW_{channel}$) Note 1	MHz	20 ($N_{RB,c}$ = 50) or 40 ($N_{RB,c}$ = 100)	
SCS	kHz	30	
Active cell		Cell 1	
Active SyncRef UE		None	
V2X sidelink communication configuration		As specified in section A.3.21.2	IE values unless specified otherwise in this test.
PSCCH Reference Measurement Channel		CC.1A HD	As specified in Table A.3.21.3-1
PSSCH Reference Measurement Channel		CD.1A HD	As specified in Table A.3.21.3-2
Note 1: The UE is only required to be tested in one of the supported test configurations.			

Table A.9.1.1.3.1-3: Cell Test Parameters for V2X UE Transmit Timing Accuracy Test for gNB as Timing Reference

Parameter		Unit	Cell 1
RF Channel Number			2
Duplex Mode	Config 1		FDD
	Config 2,3		TDD
TDD configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
Channel Bandwidth ($BW_{channel}$)	Config 1,2	MHz	10: $N_{RB,c}$ = 52
	Config 3		40: $N_{RB,c}$ = 106
Initial BWP Configuration			DLBWP.0.1 ULBWP.0.1
Dedicated BWP Configuration			DLBWP.1.1 ULBWP.1.1
DRX Cycle			N/A
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD
	Config 2		SR.1.1 TDD
	Config 3		SR.2.1 TDD
CORESET Reference Channel	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
SSB configuration	Config 1,2		SSB.1 FR1

	Config 3		SSB.2 FR1
SMTC Configuration			SMTC.2
OCNG Patterns			OP.1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note2	Config 1,2,3	dBm/15 kHz	-98
N_{oc} Note2	Config 1,2	dBm/SCS	-98
	Config 3		-95
$\hat{E}_s / N_{oc}$		dB	3
SS-RSRP Note3	Config 1,2	dBm/SCS	-95
	Config 3		-92
Io Note 3	Config 1,2	dBm/9.36 MHz	-65.2
	Config 3	dBm/38.1 MHz	-59.2
Propagation Condition			AWGN

Note 1: OCNG shall be used such that cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.9.1.1.3.2 Test requirements

For parameters specified in Tables A.9.1.1.3.1-1 A.9.1.1.3.1-2 and A.9.1.1.3.1-3, the timing accuracy for V2X sidelink transmission shall be within the limits defined in clause 12.2.3. The timing accuracy is verified by using PSSCH transmissions.

A.9.1.2 Test for Initiation/Cease of S-SSB Transmission with V2X Sidelink Communication

A.9.1.2.1 Test for FR1 NR Cell as synchronization reference source without gap under non-DRX

A.9.1.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the V2X UE meets the requirements related to the maximum evaluation time allowed to initiate and cease S-SSB transmissions defined in clause 12.3.1.1, when the reference timing used for sidelink transmissions is a NR serving cell in FR1 on a non-V2X sidelink carrier.

This test is applicable for V2X sidelink communication capable UEs that support NR Uu and sidelink operation.

Supported test configurations for FR1 NR cell are shown in Table A.9.1.2.1.1-1.

Table A.9.1.2.1.1-1: Supported Test Configurations for FR1 NR cell as synchronization reference source

Configuration	Description

1	NR Uu: FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NR Uu: TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
3	NR Uu: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note 1: The UE is only required to pass in one of the supported test configurations in FR1. Note 2: For NR SL, SL BW is one between 20MHz and 40MHz, and SL SCS is 30kHz.	

The test parameters are given in Table A.9.1.2.1.1-2 and Table A.9.1.2.1.1-3 below. There is one active cell in this test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively.

During T1, the SS-RSRP of the PCell is above *syncTxThreshIC* and the UE is not expected to be transmitting S-SSB.

During T2, the SS-RSRP of the PCell is lowered below *syncTxThreshIC* and the UE is expected to initiate S-SSB transmissions.

During T3, the SS-RSRP of the PCell is increased back to be above *syncTxThreshIC* and the UE is expected to cease S-SSB transmissions.

Table A.9.1.2.1.1-2: Test Parameters for Initiation/Cease of S-SSB Transmission Test for FR1 NR cell as synchronization reference source

Parameter	Unit	Value	Comment
SCS	kHz	30	
Active cell		Cell 1	Serving cell on RF channel number 1
Active SyncRef UE		None	
Active V2X UE		V2X UE	Transmitting S-SSB on RF channel number 2 (HD carrier in Band n47 or n38)
V2X sidelink communication configuration		As specified in Table A.3.21.2-2	IE values unless specified otherwise in this test
networkControlledSyncTx		Not configured	
syncTxThreshIC	dBm/SCS	-110	In SIB12
DRX		OFF	
T1	s	3	
T2	s	5.24	
T3	s	5.24	

Table A.9.1.2.1.1-3: FR1 NR Cell Specific Test Parameters for Initiation/Cease of S-SSB Transmission Test for FR1 NR cell as synchronization reference source

Parameter		Unit	Cell1		
			T1	T2	T3
NR RF Channel Number			1		
Duplex Mode	Config 1		FDD		
	Config 2,3		TDD		
TDD configuration	Config 1		Not applicable		
	Config 2		TDDConf.1.1		
	Config 3		TDDConf.2.1		
Channel Bandwidth ($BW_{channel}$)	Config 1,2	MHz	10:$N_{RB,c}$ = 52		
	Config 3		40:$N_{RB,c}$ = 106		
Initial BWP Configuration			DLBWP.0.1 ULBWP.0.1		
Dedicated BWP Configuration			DLBWP.1.1		

			ULBWP.1.1		
DRx Cycle		ms	N/A		
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD		
	Config 2		SR.1.1 TDD		
	Config 3		SR.2.1 TDD		
CORESET Reference Channel	Config 1		CR.1.1 FDD		
	Config 2		CR.1.1 TDD		
	Config 3		CR.2.1 TDD		
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD		
	Config 2		CCR.1.1 TDD		
	Config 3		CCR.2.1 TDD		
SSB configuration	Config 1,2		SSB.1 FR1		
	Config 3		SSB.2 FR1		
SMTC Configuration	Config 1		SMTC.2		
	Config 2,3		SMTC.1		
TRS configuration	Config 1		TRS.1.1 FDD		
	Config 2		TRS.1.1 TDD		
	Config 3		TRS.1.2 TDD		
OCNG Patterns			OP.1		
EPRE ratio of PSS to SSS		dB	0		
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
N_{oc} Note2	Config 1,2,3	dBm/15 kHz	-110		
	Config 1,2	dBm /SCS	-110		
	Config 3		-107		
$\hat{E}_s / N_{oc}$		dB	4.5	-4.5	4.5
$\hat{E}_s / I_{ot}$		dB	4.5	-4.5	4.5
SS-RSRP Note3	Config 1,2	dBm /SCS	-105.5	-114.5	-105.5
	Config 3		-102.5	-111.5	-102.5
Io Note3	Config 1,2	dBm /9.36MHz	-76.2	-80.7	-76.2
	Config 3	dBm/ 38.16MHz	-70.1	-74.6	-70.1
Propagation condition			AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.9.1.2.1.2 Test Requirements

The S-SSB transmission initiation delay is defined as the time from the beginning of time period T2 up to the moment when the UE initiates the S-SSB transmission.

The S-SSB transmission initiation delay shall be less than 0.56 s.

The S-SSB transmission cease delay is defined as the time from the beginning of time period T3 up to the moment when the UE ceases the S-SSB transmission.

The S-SSB transmission cease delay shall be less than 0.56 s.

The rate of correct initiation/cease delay of S-SSB transmissions observed during repeated tests shall be at least 90%.

NOTE: The initiation/cease delay of S-SSB transmissions can be expressed as: $T_{evaluate,SLSS}$ + S-SSB period,

Where:

$T_{evaluate,SLSS}$ = 0.4 sec (as specified in clause 12.3.1.1);

S-SSB period = 160ms.

A.9.1.2.2 Test for SyncRef UE as synchronization reference source

A.9.1.2.2.1 Test Purpose and Environment

The purpose of this test is to verify the requirements related to the evaluation time allowed to initiate and cease S-SSB transmissions defined in clause 12.3.1.4, when the reference timing used for sidelink transmissions is a SyncRef UE.

The test parameters are given in Table A.9.1.2.2.1-1 and Table A.9.1.2.2.1-2 below. There are neither active cells nor GNSS signals in this test. There is one active SyncRef UE (SyncRef UE 1) in this test. The test system shall emulate SyncRef UE 1 to transmit S-SSB every synchronization period.

Prior to start of test, test system is required to ensure that the V2X UE is synchronized to the SyncRef UE 1 and is transmitting S-SSB as derived from the S-SSB of SyncRef UE 1 as per clause 5.8.5.3 of TS 38.331[2]. For the test configuration, the SLSSID used by the V2X UE shall be 30 with *inCoverage* IE in MIB-SL set as FALSE. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively.

During T1, the PSBCH-RSRP of SyncRef UE 1 is above *syncTxThreshOOC* and the UE is not expected to be transmitting S-SSB.

During T2, the PSBCH-RSRP of SyncRef UE 1 is lowered below *syncTxThreshOOC* and the UE is expected to initiate S-SSB transmissions.

During T3, the PSBCH-RSRP of SyncRef UE 1 is increased back to be above *syncTxThreshOOC* and the UE is expected to cease S-SSB transmissions.

Table A.9.1.2.2.1-1: Test Parameters for Initiation/Cease of S-SSB Transmission Test for SyncRef UE as synchronization reference source

Parameter	Unit	Value	Comment
SCS	kHz	30	
Active cell		None	
Active SyncRef UE		SyncRef UE 1	Transmitting S-SSB on RF channel number 1(HD carrier in Band n47 or n38)
Active V2X UE		V2X UE	Transmitting S-SSB on RF channel number 1(HD carrier in Band n47 or n38)
V2X sidelink communication preconfiguration		As specified in Table A.3.21.2-2	IE values unless specified otherwise in this test
networkControlledSyncTx		Not configured	
syncTxThreshOoC	dBm/30kHz	-100	
T1	s	3	
T2	s	5.24	

T3	s	5.24	

Table A.9.1.2.2.1-2: SyncRef UE Specific Test Parameters for Initiation/Cease of S-SSB Transmission Test for SyncRef UE as synchronization reference source

Parameter	Unit	SyncRef UE 1		
		T1	T2	T3
NR RF Channel Number		1		
V2X SL communication resource pool configuration		As specified in Table A.3.21.2-2		
Channel Bandwidth ($BW_{channel}$) Note3	MHz	20($N_{RB,c}$ = 50) or 40($N_{RB,c}$ = 100)		
SLSSID		30		
inCoverage		TRUE		
networkControlledSyncTx		ON		
N_{oc} Note1	dBm/30 kHz	-98		
$\hat{E}_s / I_{ot}$	dB	5.5	-3.5	5.5
PSBCH $\hat{E}_s / N_{oc}$	dB	5.5	-3.5	5.5
PSBCH-RSRP Note2	dBm/30 kHz	-92.5	-101.5	-92.5
Io Note2	dBm /18MHz	-63.6	-68.6	-63.6
	dBm/36MHz	-60.6	-65.6	-60.6
Propagation condition		AWGN		

Note 1: Interference from other UEs and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: PSBCH-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Io level is based on the allocated RBs for S-PSS/S-SSS/PSBCH symbols.
Note 3: The UE is only required to be tested in one of the supported test configurations.
Note 4: S-PSS Es/Noc and S-SSS Es/Noc are set the same as PSBCH Es/Noc.

A.9.1.2.2.2 Test Requirements

The S-SSB transmission initiation delay is defined as the time from the beginning of time period T2 up to the moment when the UE initiates the S-SSB transmission.

The S-SSB transmission initiation delay shall be less than 0.8 s.

The S-SSB transmission cease delay is defined as the time from the beginning of time period T3 up to the moment when the UE ceases the S-SSB transmission.

The S-SSB transmission cease delay shall be less than 0.8 s.

The rate of correct initiation/cease delay of S-SSB transmissions observed during repeated tests shall be at least 90%.

NOTE: The initiation/cease delay of S-SSB transmissions can be expressed as: $T_{evaluate,SLSS}$ + S-SSB period,

Where:

- $T_{evaluate,SLSS}$ = 0.64 sec (as specified in clause 12.3.1.4);
- S-SSB period = 160ms.

A.9.1.2.3 Test for SyncRef UE as synchronization reference source when SL-DRX is used

A.9.1.2.3.1 Test Purpose and Environment

The purpose of this test is to verify the requirements related to the evaluation time allowed to initiate and cease S-SSB transmissions defined in clause 12.3.1.4, when the reference timing used for sidelink transmissions is a SyncRef UE and SL-DRX is used.

The test parameters are given in Table A.9.1.2.3.1-1 and Table A.9.1.2.3.1-2 below. There are neither active cells nor GNSS signals in this test. There is one active SyncRef UE (SyncRef UE 1) in this test. The test system shall emulate SyncRef UE 1 to transmit S-SSB every synchronization period.

Prior to start of test, test system is required to ensure that the V2X UE is synchronized to the SyncRef UE 1 and is transmitting S-SSB as derived from the S-SSB of SyncRef UE 1 as per clause 5.8.5.3 of TS 38.331[2]. For the test configuration, the SLSSID used by the V2X UE shall be 30 with *inCoverage* IE in MIB-SL set as FALSE. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively.

During T1, the PSBCH-RSRP of SyncRef UE 1 is above *syncTxThreshOOC* and the UE is not expected to be transmitting S-SSB.

During T2, the PSBCH-RSRP of SyncRef UE 1 is lowered below *syncTxThreshOOC* and the UE is expected to initiate S-SSB transmissions.

During T3, the PSBCH-RSRP of SyncRef UE 1 is increased back to be above *syncTxThreshOOC* and the UE is expected to cease S-SSB transmissions.

Table A.9.1.2.3.1-1: Test Parameters for Initiation/Cease of S-SSB Transmission Test for SyncRef UE as synchronization reference source when SL-DRX is used

Parameter	Unit	Value	Comment
SCS	kHz	30	
Active cell		None	
Active SyncRef UE		SyncRef UE 1	Transmitting S-SSB on RF channel number 1(HD carrier in Band n47 or n38)
Active V2X UE		V2X UE	Transmitting S-SSB on RF channel number 1(HD carrier in Band n47 or n38)
V2X sidelink communication preconfiguration		As specified in Table A.3.21.2-2	IE values unless specified otherwise in this test
networkControlledSyncTx		Not configured	
syncTxThreshOoC	dBm/30kHz	-97	
SL-DRX		SL-DRX.2	SL-DRX configuration as specified in clause A.3.21.4
T1	s	3	
T2	s	5.24	
T3	s	5.24	

Table A.9.1.2.3.1-2: SyncRef UE Specific Test Parameters for Initiation/Cease of SLSS Transmission Test for SyncRef UE as synchronization reference source when SL-DRX is used

Parameter	Unit	Cell1		
		T1	T2	T3
NR RF Channel Number		1		

V2X SL communication resource pool configuration		As specified in Table A.3.21.2-2		
Channel Bandwidth ($BW_{channel}$) Note3	MHz	20($N_{RB,c}$ = 50) or 40($N_{RB,c}$ = 100)		
SLSSID		30		
inCoverage		FALSE		
networkControlledSyncTx		ON		
N_{oc} Note1	dBm/30 kHz	-98		
$\hat{E}_s / I_{ot}$	dB	5.5	-3.5	5.5
PSBCH $\hat{E}_s / N_{oc}$	dB	5.5	-3.5	5.5
PSBCH-RSRP Note2	dBm/30 kHz	-92.5	-101.5	-92.5
Io Note2	dBm /3.96MHz	-70.2	-75.2	-70.2
Propagation condition		AWGN		

Note 1: Interference from other UEs and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: PSBCH-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Io level is based on the allocated RBs for PSPSS/PSSSS/PSBCH symbols.
Note 3: The UE is only required to be tested in one of the supported test configurations.
Note 4: PSSSS Es/Noc and PSPSS Es/Noc are set the same as PSBCH Es/Noc.

A.9.1.2.3.2 Test Requirements

The S-SSB transmission initiation delay is defined as the time from the beginning of time period T2 up to the moment when the UE initiates the S-SSB transmission.

The S-SSB transmission initiation delay shall be less than 1.44 s.

The S-SSB transmission cease delay is defined as the time from the beginning of time period T3 up to the moment when the UE ceases the S-SSB transmission.

The S-SSB transmission cease delay shall be less than 1.44 s.

The rate of correct initiation/cease delay of S-SSB transmissions observed during repeated tests shall be at least 90%.

NOTE: The initiation/cease delay of S-SSB transmissions can be expressed as: $T_{evaluate,SLSS}$ + S-SSB period,

Where:

- $T_{evaluate,SLSS}$ = 1.28 sec (as specified in clause 12.3.1.4);
- S-SSB period = 160ms.

A.9.1.3 Test for V2X Synchronization Reference Selection/Reselection

A.9.1.3.1 Test for GNSS configured as the highest priority

A.9.1.3.1.1 Test Purpose and Environment

The purpose of this test is to verify the requirements related to SyncRef UE selection / reselection defined in clause 12.4, when GNSS is configured as the highest priority. For this test, the UE is triggered by the test loop function or the upper layers to transmit for V2X Sidelink Communication.

The test parameters are given in Table A.9.1.3.1.1-1and A.9.1.3.1.1-2 below. There are no GNSS signals in this test. There are three active SyncRef UEs (SyncRef UE 1, SyncRef UE 2 and SyncRef UE 3) in this test. The test system shall emulate SyncRef UE 1, SyncRef UE 2 and SyncRef UE 3 to transmit S-SSB every S-SSB period.

The test system can verify the selection / reselection of SyncRef UE by monitoring the SLSS ID used by the V2X UE for its S-SSB transmissions. When the V2X UE is not synchronized to any SyncRef UE, then the V2X UE shall use the SLSS ID belonging to set id_oon. When the V2X UE is synchronized to a SyncRef UE, the V2X UE shall derive its SLSS ID from the SLSS ID of the SyncRef UE as per clause 5.8.5.3 of TS 38.331[2].

The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. SyncRef UE 1, SyncRef UE 2 and SyncRef UE 3 are all powered off before starting the test. During T1, SyncRef UE 1 is powered ON and the V2X UE will select SyncRef UE 1 as synchronization source. During T2, SyncRef UE 2 is powered ON and the V2X UE will select SyncRef UE 2 as the synchronization source. During T3, SyncRef UE 3 is powered ON and the V2X UE will reselect to SyncRef UE 3 as the synchronization source.

Table A.9.1.3.1.1-1: Test Parameters for V2X Synchronization Reference Selection/Reselection Tests for GNSS configured as the highest priority

Parameter		Unit	Value	Comment
SCS		kHz	30	
Initial condition	Active synchronization source		Sync Ref UE 1	DUT transmits for V2X Sidelink Communication and S-SSB with SLSS ID = 30 and in-coverage set as FALSE in MIB-SL.
T2 end condition	Active synchronization source		Sync Ref UE 2	DUT transmits for V2X Sidelink Communication and S-SSB with SLSS ID = 336 and in-coverage set as FALSE in MIB-SL.
Final condition	Active synchronization source		Sync Ref UE 3	UE transmits for V2X Sidelink Communication and S-SSB with SLSS ID = 0 and in-coverage set as FALSE in MIB-SL.
Active SyncRef UEs			SyncRef UE 1 SyncRef UE 2 SyncRef UE 3	Transmitting S-SSB on RF channel number 1 (HD carrier in Band n47 or n38)
Timing offset among SyncRef UEs		µs	CP/2	Synchronous
Frequency offset of SyncRef UE 1,2,3		ppm	0	
V2X sidelink Communication configuration			As specified in Table A. 3.21.2-2	IE values unless specified otherwise in this test.
sl-SyncPriority			gnss	
syncTxThreshOoC			+infinity	syncTxThreshOoC
T1		s	24	
T2		s	16	
T3		s	3.2	

Table A.9.1.3.1.1-2: SyncRef UE Specific Test Parameters for V2X Synchronization Reference Selection/Reselection Tests for GNSS configured as the highest priority

Parameter	Unit	SyncRef UE 1			SyncRef UE 2			SyncRef UE 3		
		T1	T2	T3	T1	T2	T3	T1	T2	T3
NR RF Channel Number		1(HD carrier in Band n47 or n38)								
Channel Bandwidth ($BW_{channel}$) Note 4	MHz	20 ($N_{RB,c}$ = 50) or 40 ($N_{RB,c}$ = 100)								
V2X Sidelink Communication resource pool configuration		As specified in Table A.3.21.2-2								

networkControlledSyncTx		ON			N/A			ON		
syncTxThreshOoC	dBm/15 kHz	N/A			+infinity			N/A		
SLSSID		30			0			0		
inCoverage (in MIB-SL)		TRUE			FALSE			TRUE		
N_{oc} Note1	dBm/30 kHz	-95								
$\hat{E}_s / N_{oc}$	dB	0	0	0	-infinity	0	0	-infinity	-infinity	3
$\hat{E}_s / I_{ot}$ Note2	dB	0	0	-4.76	-infinity	0	0	-infinity	-infinity	0
PSBCH-RSRP Note2, Note 3	dBm/30 kHz	-95	-95	-95	-infinity	-95	-95	-infinity	-infinity	-92
Io Note2	dBm/18 MHz	-70.78	-70.78	-67.78	-73.79	-70.78	-70.78	-70.78	-70.78	-67.78
	dBm/36 MHz	-70.78	-70.78	-67.78	-73.79	-70.78	-70.78	-70.78	-70.78	-67.78
Propagation Condition		AWGN								

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 2: Es/Iot, Io, PSBCH-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 3: S-PSS Es/Iot and S-SSS Es/Iot are set the same as PSBCH Es/Iot.

Note 4: The UE is only required to be tested in one of the supported test configurations.

A.9.1.3.1.2 Test Requirements

During T1, SyncRef UE selection delay is defined as the time from the beginning of T1 to the time UE is synchronized to SyncRef UE 1, and changes its S-SSB transmissions timing and SLSS ID to follow SyncRef UE 1 as the synchronization source. For the test configuration, the SLSS ID will be changed to 30 (with in-coverage IE in MIB-SL set to FALSE) after SyncRef UE selection delay from start of T1.

The SyncRef UE selection delay shall be less than 8.8sec. The SyncRef UE selection delay can be expressed as:

SyncRef UE selection delay = $T_{detect,SyncRef\ UE} + T_{evaluate,SLSS}$ + S-SSB period

Where

- $T_{detect,SyncRef\ UE}$ = 8sec (as specified in sub-clause 12.4)
- $T_{evaluate,SLSS}$ = 0.64 sec (as specified in sub-clause 12.3)
- S-SSB period = 160ms

This gives a total of 8.8 seconds.

2) During T2, SyncRef UE reselection delay is defined as the time from the beginning of T2 to the time UE changes its synchronization source from SyncRef UE 1 to SyncRef UE 2 and changes its S-SSB transmissions timing and

SLSS ID to follow SyncRef UE 2 as the synchronization source. For the test configuration, the SLSS ID will be changed to 336 (with in-coverage IE in MIB-SL set to FALSE) after SyncRef UE reselection delay from start of T2.

The SyncRef UE reselection delay shall be less than 8.8sec. The SyncRef UE reselection delay can be expressed as:

SyncRef UE reselection delay = $T_{detect,SyncRef\ UE}$ + $T_{evaluate,SLSS}$ + S-SSB period

Where

- $T_{detect,SyncRef\ UE}$ = 8sec (as specified in sub-clause 12.4)
- $T_{evaluate,SLSS}$ = 0.64 (as specified in sub-clause 12.3)
- S-SSB period = 160ms

This gives a total of 8.8 seconds.

3) During T3, SyncRef UE reselection delay is defined as the time from the beginning of T3 to the time UE changes its synchronization source from SyncRef UE 2 to SyncRef UE 3, and changes its S-SSB transmissions timing and SLSS ID to follow SyncRef UE 3 as the synchronization source. For the test configuration, the SLSS ID will still be 0 (with in-coverage IE in MIB-SL set to FALSE) after SyncRef UE reselection delay from start of T3.

The SyncRef UE reselection delay shall be less than 2.4sec. The SyncRef UE reselection delay can be expressed as:

SyncRef UE reselection delay = $T_{detect,SyncRef\ UE}$ + $T_{evaluate,SLSS}$ + S-SSB period

Where

- $T_{detect,SyncRef\ UE}$ = 1.6sec (as specified in sub-clause 12.4)
- $T_{evaluate,SLSS}$ = 0.64 (as specified in sub-clause 12.3)
- S-SSB period = 160 ms

This gives a total of 2.4 seconds.

The test system will verify that the V2X UE does not drop or delay more than 6% of its V2X data and S-SSB transmissions during the duration of T2, and does not drop or delay more than 30% of its S-SSB transmissions during the duration of T3.

The rate of correct SyncRef UE selection / reselection observed during repeated tests shall be at least 90%.

A.9.1.3.2 Test for FR1 NR Cell configured as the highest priority

A.9.1.3.2.1 Test Purpose and Environment

The purpose of this test is to verify the requirements related to SyncRef UE selection / reselection defined in clause 12.4, when gNB is configured as the highest priority. For this test, the UE is triggered by the test loop function or the upper layers to transmit for V2X Sidelink Communication.

This test is applicable for V2X sidelink communication capable UEs that support gNB as synchronization source and sidelink operation.

Table A.9.1.3.2.1-1: Void

The test parameters are given in Table A.9.1.3.2.1-2 and A.9.1.3.2.1-3 below. There are no active cells and GNSS is reliable during the whole test. The test system can emulate and send the GNSS signal to the test UE. The test

parameters for GNSS signals are defined in B.4.1. There are two active SyncRef UEs (SyncRef UE 1 and SyncRef UE 2) in this test. The test system shall emulate SyncRef UE 1 and SyncRef UE 2 to transmit S-SSB every S-SSB period.

The test system can verify the selection / reselection of SyncRef UE by monitoring the SLSS ID used by the V2X UE for its S-SSB transmissions. When the V2X UE is synchronized to a SyncRef UE, the V2X UE shall derive its SLSS ID from the SLSS ID of the SyncRef UE as per clause 5.8.5.3 of TS 38.331[2].

The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. During T1, both SyncRef UE 1 and SyncRef UE 2 are powered off and the V2X UE will select GNSS as synchronization source. During T2, SyncRef UE 1 is powered ON and the V2X UE will select SyncRef UE 1 as the synchronization source. During T3, a higher priority SyncRef UE 2 is additionally powered ON and the V2X UE will reselect to the higher priority SyncRef UE 2 as the synchronization source.

Table A.9.1.3.2.1-2: Test Parameters for V2X Synchronization Reference Selection/Reselection Tests for FR1 NR Cell configured as the highest priority

Parameter		Unit	Value	Comment
SCS		kHz	30	
Initial condition	Active synchronization source		GNSS	DUT transmits for V2X Sidelink Communication and S-SSB with SLSS ID = 0 and in-coverage set as TRUE in MIB-SL.
T2 end condition	Active synchronization source		Sync Ref UE 1	DUT transmits for V2X Sidelink Communication and S-SSB with SLSS ID = 336+59 and in-coverage set as FALSE in MIB-SL.
Final condition	Active synchronization source		Sync Ref UE 2	UE transmits for V2X Sidelink Communication and S-SSB with SLSS ID = 30 and in-coverage set as FALSE in MIB-SL.
Active cell			None	
Active SyncRef UEs			SyncRef UE 1 SyncRef UE 2	Transmitting S-SSB on RF channel number 1
Timing offset between SyncRef UE 1 and SyncRef UE 2		ms	3	Asynchronous
Frequency offset of SyncRef UE 1,2		ppm	0	
V2X sidelink Communication preconfiguration			As specified in Table A.3.21.2-2	IE values unless specified otherwise in this test.
syncPriority			*gnb*	
syncTxThreshOoC			13 (+infinity)	
T1		s	24	
T2		s	16	
T3		s	16	

Table A.9.1.3.2.1-3: SyncRef UE Specific Test Parameters for V2X Synchronization Reference Selection/Reselection Tests for FR1 NR Cell configured as the highest priority

Parameter	Unit	SyncRef UE 1			SyncRef UE 2		
		T1	T2	T3	T1	T2	T3
NR RF Channel Number		1(HD carrier in Band n47 or n38)					
Channel Bandwidth ($BW_{channel}$) Note 4	MHz	20($N_{RB,c}$ = 50) or 40($N_{RB,c}$ = 100)					
V2X Sidelink Communication resource pool configuration		As specified in Table A.3.21.2-2			As specified in Table A.3.21.2-2		
networkControlledSyncTx		N/A			ON		

syncTxThreshOoC	dBm/15 kHz	+infinity			N/A		
SLSSID		59			30		
inCoverage (in MIB-SL)		FALSE			TRUE		
N_{oc} Note1	dBm/30 kHz	-95					
$\hat{E}_s / N_{oc}$	dB	-infinity	0	0	-infinity	-infinity	3
$\hat{E}_s / I_{ot}$ Note2,	dB	-infinity	0	-4.76	-infinity	-infinity	0
Io Note2,	dBm/18MHz	-73.79	-70.78	-70.78	-73.79	-73.79	-70.78
	dBm/36MHz	-73.79	-70.78	-70.78	-73.79	-73.79	-70.78
PSBCH-RSRP Note2, Note 3	dBm/30 kHz	-infinity	-95	-95	-infinity	-infinity	-92
Propagation Condition		AWGN					

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 2: Es/Iot, Io, PSBCH-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 3: S-PSS Es/Iot and S-SSS Es/Iot are set the same as PSBCH Es/Iot.

Note 4: The UE is only required to be tested in one of the supported test configurations.

A.9.1.3.2.2 Test Requirements

1) During T2, SyncRef UE selection delay is defined as the time from the beginning of T2 to the time UE is synchronized to SyncRef UE 1 and changes its S-SSB transmissions timing and SLSS ID to follow SyncRef UE 1 as the synchronization source. For the test configuration, the SLSS ID will be changed to 336+59 (with in-coverage IE in MIB-SL set to FALSE) after SyncRef UE selection delay from start of T2.

The SyncRef UE selection delay shall be less than 8.8sec. The SyncRef UE selection/reselection delay can be expressed as:

SyncRef UE selection/reselection delay = $T_{detect,SyncRef\ UE}$ + $T_{evaluate,SLSS}$ + S-SSB period

Where

- $T_{detect,SyncRef\ UE}$ = 8sec (as specified in sub-clause 12.4)
- $T_{evaluate,SLSS}$ = 0.64sec (as specified in sub-clause 12.3)
- S-SSB period = 160ms

This gives a total of 8.8 seconds.

2) During T3, SyncRef UE reselection delay is defined as the time from the beginning of T3 to the time UE changes its synchronization source from SyncRef UE 1 to SyncRef UE 2, and changes its S-SSB transmissions timing and SLSS ID to follow SyncRef UE 2 as the synchronization source. For the test configuration, the SLSS ID will be changed to 30 (with in-coverage IE in MIB-SL set to FALSE) after SyncRef UE selection delay from start of T3.

The SyncRef UE reselection delay shall be less than 8.8sec. The SyncRef UE selection/reselection delay can be expressed as:

SyncRef UE selection/reselection delay = $T_{detect,SyncRef\ UE}$ + $T_{evaluate,SLSS}$ + S-SSB period

Where

- $T_{detect,SyncRef\ UE}$ = 8sec (as specified in sub-clause 12.4)
- $T_{evaluate,SLSS}$ = 0.64 sec (as specified in sub-clause 12.3)
- S-SSB period = 160ms

This gives a total of 8.8 seconds.

The test system will verify that the V2X UE does not drop or delay more than 6% of its V2X data and S-SSB transmissions during the duration of T2 and T3.

The rate of correct SyncRef UE selection / reselection observed during repeated tests shall be at least 90%.

A.9.1.3.3 Test for GNSS configured as the highest priority under SL-DRX

A.9.1.3.3.1 Test Purpose and Environment

The purpose of this test is to verify the requirements related to SyncRef UE selection / reselection defined in clause 12.4, when GNSS is configured as the highest priority and SL-DRX is configured. For this test, the UE is triggered by the test loop function or the upper layers to transmit for V2X Sidelink Communication.

The test parameters are given in Table A.9.1.3.3.1-1and A.9.1.3.3.1-2 below. There are no GNSS signals in this test. There are three active SyncRef UEs (SyncRef UE 1, SyncRef UE 2 and SyncRef UE 3) in this test. The test system shall emulate SyncRef UE 1, SyncRef UE 2 and SyncRef UE 3 to transmit S-SSB every S-SSB period.

The test system can verify the selection / reselection of SyncRef UE by monitoring the SLSS ID used by the V2X UE for its S-SSB transmissions. When the V2X UE is not synchronized to any SyncRef UE, then the V2X UE shall use the SLSS ID belonging to set id_oon. When the V2X UE is synchronized to a SyncRef UE, the V2X UE shall derive its SLSS ID from the SLSS ID of the SyncRef UE as per clause 5.8.5.3 of TS 38.331[2].

The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. SyncRef UE 1, SyncRef UE 2 and SyncRef UE 3 are all powered off before starting the test. During T1, SyncRef UE 1 is powered ON and the V2X UE will select SyncRef UE 1 as synchronization source. During T2, SyncRef UE 2 is powered ON and the V2X UE will select SyncRef UE 2 as the synchronization source. During T3, SyncRef UE 3 is powered ON and the V2X UE will reselect to SyncRef UE 3 as the synchronization source. SL-DRX is configured during the entire test period.

Table A.9.1.3.3.1-1: Test Parameters for V2X Synchronization Reference Selection/Reselection Tests for GNSS configured as the highest priority

Parameter		Unit	Value	Comment
SCS		kHz	30	
Initial condition	Active synchronization source		Sync Ref UE 1	DUT transmits for V2X Sidelink Communication and S-SSB with SLSS ID = 30 and in-coverage set as FALSE in MIB-SL.
T2 end condition	Active synchronization source		Sync Ref UE 2	DUT transmits for V2X Sidelink Communication and S-SSB with SLSS ID = 336 and in-coverage set as FALSE in MIB-SL.
Final condition	Active synchronization source		Sync Ref UE 3	UE transmits for V2X Sidelink Communication and S-SSB with SLSS ID = 0 and in-coverage set as FALSE in MIB-SL.
Active SyncRef UEs			SyncRef UE 1 SyncRef UE 2 SyncRef UE 3	Transmitting S-SSB on RF channel number 1 (HD carrier in Band n47 or n38)
Timing offset among SyncRef UEs		µs	CP/2	Synchronous
Frequency offset of SyncRef UE 1,2,3		ppm	0	
V2X sidelink Communication configuration			As specified in Table A. 3.21.2-2	IE values unless specified otherwise in this test.
sl-SyncPriority			gnss	
syncTxThreshOoC			+infinity	syncTxThreshOoC
SL-DRX			SL.DRX.2	As specified in clause A.3.21.4
T1		s	24	
T2		s	16	

T3	s	3.2	

Table A.9.1.3.3.1-2: SyncRef UE Specific Test Parameters for V2X Synchronization Reference Selection/Reselection Tests for GNSS configured as the highest priority

Parameter	Unit	SyncRef UE 1			SyncRef UE 2			SyncRef UE 3		
		T1	T2	T3	T1	T2	T3	T1	T2	T3
NR RF Channel Number		1(TDD carrier in Band n47 or n38)								
Channel Bandwidth ($BW_{channel}$) Note 4	MHz	20 ($N_{RB,c}$ = 50) or 40 ($N_{RB,c}$ = 100)								
V2X Sidelink Communication resource pool configuration		As specified in Table A.3.21.2-2								
networkControlledSyncTx		ON			N/A			ON		
syncTxThreshOoC	dBm/15 kHz	N/A			+infinity			N/A		
SLSSID		30			0			0		
inCoverage (in MIB-SL)		TRUE			FALSE			TRUE		
N_{oc} Note1	dBm/30 kHz	-95								
$\hat{E}_s / N_{oc}$	dB	0	0	0	-infinity	0	0	-infinity	-infinity	3
$\hat{E}_s / I_{ot}$	dB	0	0	-4.76	-infinity	0	0	-infinity	-infinity	0
PSBCH-RSRP Note2, Note 3	dBm/30 kHz	-95	-95	-95	-infinity	-95	-95	-infinity	-infinity	-92
Propagation Condition		AWGN								

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: PSBCH-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: S-PSS Es/Iot and S-SSS Es/Iot are set the same as PSBCH Es/Iot.
Note 4: The UE is only required to be tested in one of the supported test configurations.

A.9.1.3.3.2 Test Requirements

During T1, SyncRef UE selection delay is defined as the time from the beginning of T1 to the time UE is synchronized to SyncRef UE 1, and changes its S-SSB transmissions timing and SLSS ID to follow SyncRef UE 1 as the synchronization source. For the test configuration, the SLSS ID will be changed to 30 (with in-coverage IE in MIB-SL set to FALSE) after SyncRef UE selection delay from start of T1.

The SyncRef UE selection delay shall be less than 8.8sec. The SyncRef UE selection delay can be expressed as:

SyncRef UE selection delay = $T_{detect,SyncRef\ UE}$ + $T_{evaluate,SLSS}$ + S-SSB period

Where

- $T_{detect,SyncRef\ UE}$ = 8sec (as specified in sub-clause 12.4)
- $T_{evaluate,SLSS}$ = 0.64 sec (as specified in sub-clause 12.3)
- S-SSB period = 160ms

This gives a total of 8.8 seconds.

2) During T2, SyncRef UE reselection delay is defined as the time from the beginning of T2 to the time UE changes its synchronization source from SyncRef UE 1 to SyncRef UE 2 and changes its S-SSB transmissions timing and SLSS ID to follow SyncRef UE 2 as the synchronization source. For the test configuration, the SLSS ID will be changed to 336 (with in-coverage IE in MIB-SL set to FALSE) after SyncRef UE reselection delay from start of T2.

The SyncRef UE reselection delay shall be less than 8.8sec. The SyncRef UE reselection delay can be expressed as:

SyncRef UE reselection delay = $T_{detect,SyncRef\ UE}$ + $T_{evaluate,SLSS}$ + S-SSB period

Where

- $T_{detect,SyncRef\ UE}$ = 8sec (as specified in sub-clause 12.4)
- $T_{evaluate,SLSS}$ = 0.64 (as specified in sub-clause 12.3)
- S-SSB period = 160ms

This gives a total of 8.8 seconds.

3) During T3, SyncRef UE reselection delay is defined as the time from the beginning of T3 to the time UE changes its synchronization source from SyncRef UE 2 to SyncRef UE 3, and changes its S-SSB transmissions timing and SLSS ID to follow SyncRef UE 3 as the synchronization source. For the test configuration, the SLSS ID will still be 0 (with in-coverage IE in MIB-SL set to FALSE) after SyncRef UE reselection delay from start of T3.

The SyncRef UE reselection delay shall be less than 2.4sec. The SyncRef UE reselection delay can be expressed as:

SyncRef UE reselection delay = $T_{detect,SyncRef\ UE}$ + $T_{evaluate,SLSS}$ + S-SSB period

Where

- $T_{detect,SyncRef\ UE}$ = 1.6sec (as specified in sub-clause 12.4)
- $T_{evaluate,SLSS}$ = 0.64 (as specified in sub-clause 12.3)
- S-SSB period = 160 ms

This gives a total of 2.4 seconds.

The test system will verify that the V2X UE does not drop its V2X data and SLSS transmissions at most in an aggregated window of 480ms during the duration of T2, and does not drop or delay at most an aggregated window of 24ms of its S-SSB transmissions during the duration of T3.

The rate of correct SyncRef UE selection / reselection observed during repeated tests shall be at least 90%.

A.9.1.3.4 Test for FR1 NR Cell configured as the highest priority under SL-DRX

A.9.1.3.4.1 Test Purpose and Environment

The purpose of this test is to verify the requirements related to SyncRef UE selection / reselection defined in clause 12.4, when gNB is configured as the highest priority and SL-DRX is configured. For this test, the UE is triggered by the test loop function or the upper layers to transmit for V2X Sidelink Communication.

This test is applicable for V2X sidelink communication capable UEs that support gNB as synchronization source and sidelink operation.

The test parameters are given in Table A.9.1.3.4.1-1 and A.9.1.3.4.1-2 below. There are no active cells and GNSS is reliable during the whole test. The test system can emulate and send the GNSS signal to the test UE. The test parameters for GNSS signals are defined in B.4.1. There are two active SyncRef UEs (SyncRef UE 1 and SyncRef

UE 2) in this test. The test system shall emulate SyncRef UE 1 and SyncRef UE 2 to transmit S-SSB every S-SSB period.

The test system can verify the selection / reselection of SyncRef UE by monitoring the SLSS ID used by the V2X UE for its S-SSB transmissions. When the V2X UE is synchronized to a SyncRef UE, the V2X UE shall derive its SLSS ID from the SLSS ID of the SyncRef UE as per clause 5.8.5.3 of TS 38.331[2].

The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. During T1, both SyncRef UE 1 and SyncRef UE 2 are powered off and the V2X UE will select GNSS as synchronization source. During T2, SyncRef UE 1 is powered ON and the V2X UE will select SyncRef UE 1 as the synchronization source. During T3, a higher priority SyncRef UE 2 is additionally powered ON and the V2X UE will reselect to the higher priority SyncRef UE 2 as the synchronization source. SL-DRX is configured during the entire test period.

Table A.9.1.3.4.1-1: Test Parameters for V2X Synchronization Reference Selection/Reselection Tests for FR1 NR Cell configured as the highest priority

Parameter		Unit	Value	Comment
SCS		kHz	30	
Initial condition	Active synchronization source		GNSS	DUT transmits for V2X Sidelink Communication and S-SSB with SLSS ID = 0 and in-coverage set as TRUE in MIB-SL.
T2 end condition	Active synchronization source		Sync Ref UE 1	DUT transmits for V2X Sidelink Communication and S-SSB with SLSS ID = 336+59 and in-coverage set as FALSE in MIB-SL.
Final condition	Active synchronization source		Sync Ref UE 2	UE transmits for V2X Sidelink Communication and S-SSB with SLSS ID = 30 and in-coverage set as FALSE in MIB-SL.
Active cell			None	
Active SyncRef UEs			SyncRef UE 1 SyncRef UE 2	Transmitting S-SSB on RF channel number 1
Timing offset between SyncRef UE 1 and SyncRef UE 2		ms	3	Asynchronous
Frequency offset of SyncRef UE 1,2		ppm	0	
V2X sidelink Communication preconfiguration			As specified in Table A.3.21.2-2	IE values unless specified otherwise in this test.
syncPriority			*gnb*	
syncTxThreshOoC			13 (+infinity)	
SL-DRX			SL.DRX.2	As specified in clause A.3.21.4
T1		s	24	
T2		s	16	
T3		s	16	

Table A.9.1.3.4.1-2: SyncRef UE Specific Test Parameters for V2X Synchronization Reference Selection/Reselection Tests for FR1 NR Cell configured as the highest priority

Parameter	Unit	SyncRef UE 1			SyncRef UE 2		
		T1	T2	T3	T1	T2	T3
NR RF Channel Number		1(HD carrier in Band n47 or n38)					
Channel Bandwidth ($BW_{channel}$) Note 4	MHz	20($N_{RB,c}$ = 50) or 40($N_{RB,c}$ = 100)					
V2X Sidelink Communication resource pool configuration		As specified in Table A.3.21.2-2			As specified in Table A.3.21.2-2		
networkControlledSyncTx		N/A			ON		
syncTxThreshOoC	dBm/15 kHz	+infinity			N/A		
SLSSID		59			30		

inCoverage (in MIB-SL)		FALSE			TRUE		
N_{oc} Note1	dBm/30 kHz	-95					
$\hat{E}_s / N_{oc}$	dB	-infinity	0	0	-infinity	-infinity	3
$\hat{E}_s / I_{ot}$	dB	-infinity	0	-4.76	-infinity	-infinity	0
PSBCH-RSRP Note2, Note 3	dBm/30 kHz	-infinity	-95	-95	-infinity	-infinity	-92
Propagation Condition		AWGN					

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 2: PSBCH-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 3: S-PSS Es/Iot and S-SSS Es/Iot are set the same as PSBCH Es/Iot.

Note 4: The UE is only required to be tested in one of the supported test configurations.

A.9.1.3.4.2 Test Requirements

1) During T2, SyncRef UE selection delay is defined as the time from the beginning of T2 to the time UE is synchronized to SyncRef UE 1 and changes its S-SSB transmissions timing and SLSS ID to follow SyncRef UE 1 as the synchronization source. For the test configuration, the SLSS ID will be changed to 336+59 (with in-coverage IE in MIB-SL set to FALSE) after SyncRef UE selection delay from start of T2.

The SyncRef UE selection delay shall be less than 8.8sec. The SyncRef UE selection/reselection delay can be expressed as:

SyncRef UE selection/reselection delay = $T_{detect,SyncRef\ UE}$ + $T_{evaluate,SLSS}$ + S-SSB period

Where

- $T_{detect,SyncRef\ UE}$ = 8sec (as specified in sub-clause 12.4)
- $T_{evaluate,SLSS}$ = 0.64sec (as specified in sub-clause 12.3)
- S-SSB period = 160ms

This gives a total of 8.8 seconds.

2) During T3, SyncRef UE reselection delay is defined as the time from the beginning of T3 to the time UE changes its synchronization source from SyncRef UE 1 to SyncRef UE 2, and changes its S-SSB transmissions timing and SLSS ID to follow SyncRef UE 2 as the synchronization source. For the test configuration, the SLSS ID will be changed to 30 (with in-coverage IE in MIB-SL set to FALSE) after SyncRef UE selection delay from start of T3.

The SyncRef UE reselection delay shall be less than 8.8sec. The SyncRef UE selection/reselection delay can be expressed as:

SyncRef UE selection/reselection delay = $T_{detect,SyncRef\ UE}$ + $T_{evaluate,SLSS}$ + S-SSB period

Where

- $T_{detect,SyncRef\ UE}$ = 8sec (as specified in sub-clause 12.4)
- $T_{evaluate,SLSS}$ = 0.64 sec (as specified in sub-clause 12.3)
- S-SSB period = 160ms

This gives a total of 8.8 seconds.

The test system will verify that the V2X UE does not drop or delay its V2X data and SLSS transmissions at most in an aggregated window of 480ms during the duration of T2 and T3.

The rate of correct SyncRef UE selection / reselection observed during repeated tests shall be at least 90%.

A.9.1.4 Test for L1 SL-RSRP Measurement

A.9.1.4.1 Test for V2X UE Autonomous Resource Selection/Reselection

A.9.1.4.1.1 Test Purpose and Environment

The purpose of this test is to verify the requirements related to autonomous resource selection / reselection for V2X UE in mode 2 defined in clause 12.5. For this test, the UE is triggered by the test loop function or the upper layers to transmit for V2X Sidelink Communication.

The test parameters are given in Table A.9.1.4.1.1-1and A. 9.1.4.1.1-2 below. There are 50 active V2X sidelink UEs (UE0~UE49) in this test. Both the UE under test and active V2X sidelink UEs select GNSS as synchronization reference source. The test system can emulate and send the GNSS signal to the test UE and active V2X sidelink UEs. The test parameters for GNSS signals are defined in B.4.1. The test system shall emulate the active V2X sidelink UEs to transmit PSCCH/PSSCH every 5ms. At the beginning of whole test, the test equipment shall send one AT command to trigger the UE under test continuously transmits PSCCH/PSSCH.

The test consists of two duration T1 and T2. During T1, the signal from Test Equipement are configured such that

- he measured PSSCH-RSRP for 20 active V2X sidelink UEs(UE10~UE29) is above the measurement threshold, and the resource occupied by the 20 active V2X sidelink UEs is expected to be excluded in the resource selection procedure and,
- the measured PSSCH-RSRP for other 30 active V2X sidelink UEs(UE0~UE9, UE30~UE49) is low the measurement threshold, and the resource occupied by the 30 active V2X sidelink UEs is expected to be included in the resource selection procedureDuring T2, the signal from Test Equipement are configured such that
- the measured PSSCH-RSRP or the 20 active V2X sidelink UEs(UE10~UE29) is below the measurement threshold, and the resource occupied by the 20 active V2X sidelink UEs is expected to be included in the resource selection procedure and,
- the measured PSSCH-RSRP for other 30 active V2X sidelink UEs(UE0~UE9, UE30~UE49) is above the measurement threshold, and the resource occupied by the 30 active V2X sidelink UEs is expected to be excluded in the resource selection procedure.

Table A. 9.1.4.1.1-1: Test Parameters for V2X UE Autonomous Resource Selection/Reselection Tests for PSSCH-RSRP measurements

Parameter	Unit	Value	Comment
NR RF Channel Number		1	HD carrier in Band n47 or n38
Channel Bandwidth ($BW_{channel}$) Note 2	MHz	20 ($N_{RB,c}$ = 50) or 40 ($N_{RB,c}$ = 100)	
SCS	kHz	30	
V2X sidelink communication pre-configuration		As specified in Table A.3.21.2-1 and A.3.21.2-3	IE values unless specified otherwise in this test.
sl-TimeResource-r16 included in SL-ResourcePool		1111111111	Indicates the bitmap of the TX and Rx resource pool, which is defined by

				repeating the bitmap within a SFN cycle (see TS 38.213[3])
sl-NumSubchannel-r16 included in SL-ResourcePool			5	Indicates the number of sub-channels for TX resource pool
sl-SubchannelSize-r16 included in SL-ResourcePool			10	Indicates the minimum granularity in frequency domain for the sensing for PSSCH resource selection in the unit of PRB
Number of Active Sidelink UEs			50	Active Sidelink UE i = 0, .., 49
SL-Thres-RSRP			12	Corresponding -106 dBm as defined in Section 6.3.5 in TS38.331[2] Same for all priority level pairs.
Active Sidelink UEs (UE i = 0, .., 49)	V2X sidelink Communication preconfiguration		As specified in Table A.3.21.2-1 And A.3.21.2-3	IE values unless specified otherwise in this test.
	sl-TimeResource-r16 included in SL-ResourcePool		$\{1_i\}$ Note1	Indicates the bitmap of the TX and Rx resource pool, which is defined by repeating the bitmap within a SFN cycle (see TS 38.213[3])
	sl-NumSubchannel-r16 included in SL-ResourcePool		1	Indicates the number of sub-channels for TX resource pool
	sl-StartRB-Subchannel-r16 included in SL-ResourcePool		floor(i/10)x10	Indicates the lowest RB index of the subchannel with the lowest index. UE 0~9 start RB=0; UE 10~19 start RB=10; UE 20~29 start RB=20; UE 30~39 start RB=30; UE 40~49 start RB=40;
	sl-SubchannelSize-r16 included in SL-ResourcePool		10	Indicates the minimum granularity in frequency domain for the sensing for PSSCH resource selection in the unit of PRB
	sl-ResourceReservePeriod2-r16	ms	5	
Timing offset among Active Sidelink UEs		μs	CP/2	Synchronous
Note 1: $\{1_i\}$ is a sequence of nine 0's with one 1 in (mod(i,10)+1'th position. Note 2: The UE is only required to be tested in one of the supported test configurations.				

Table A.9.1.4.1.1-2: Active Sidelink UE Specific Test Parameters for V2X UE Autonomous Resource Selection/Reselection Tests for PSSCH-RSRP measurements

Parameter	Unit	Active Sidelink UE i (i = 0, .., 49)	
		T1	T2
NR RF Channel Number	-	1	

Channel Bandwidth ($BW_{channel}$) Note 5	MHz	20 ($N_{RB,c}$ = 50) or 40 ($N_{RB,c}$ = 100)	
PSCCH RMC (defined in A.3.21.3)	-	CC.1A HD	
PSSCH RMC (defined in A.3.21.3)	-	CD.1A HD	
N_{oc} Note1	dBm/30 kHz	-111	-121
$\hat{E}_s/N_{oc}$ Note3	dB	10	
$\hat{E}_s/I_{ot}$ Note2,3	dB	10	
$\hat{E}_s/N_{oc}$ Note4	dB	0	20
$\hat{E}_s/I_{ot}$ Note2,4	dB	0	20
PSSCH-RSRP1 Note 2,3	dBm/SCS	-101	-111
PSSCH -RSRP2 Note 2,4	dBm/SCS	-111	-101
Io Note 2	dBm/18 MHz	-77.42	-74.03
	dBm/36 MHz	-77.42	-74.03
Antenna Configuration	-	1x2	
Propagation Condition	-	AWGN	

Note 1: Interference from other UEs and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: Es/Iot, PSSCH-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: For UE 20 to 29, occupying subchannel #2
Note 4: For UE 0 to 19 and 30 to 49, occupying subchannel #0/1/3/4
Note 5: The UE is only required to be tested in one of the supported test configurations.

A.9.1.4.1.2 Test Requirements

The test time T1 and T2 should be long enough. The rate of PSSCH transmissions on the resources on subchannel #1 or #2 shall be less than 10% during T1. The rate of PSSCH transmissions on the resources on subchannel #1 or #2 shall be more than 90% during T2.

A.9.1.4.2 Test for V2X UE Resource Pre-emption

A.9.1.4.2.1 Test Purpose and Environment

The purpose of this test is to verify the requirements related to autonomous resource pre-emption for V2X UE in mode 2 defined in clause 12.5. For this test, the UE is triggered by the test loop function or the upper layers to transmit for V2X Sidelink Communication.

The test parameters are given in Table A. 9.1.4.2.1-1and A.12. 9.1.4.1-2 below. There is one active V2X sidelink UE in this test. Both the UE under test and the active V2X sidelink UE select GNSS as synchronization reference source. The test system can emulate and send the GNSS signal to the test UE and active V2X sidelink UEs. The test parameters for GNSS signals are defined in B.4.1. At the beginning of whole test, the test equipment shall send one message with a SL-SCH MAC PDU as specified in Clause 6.1.6 in TS 38.321[7], in order to make sure that the UE under test needs continuously transmit PSCCH/PSSCH.

The test consists of two duration T1 and T2. During T1, the signal from Test Equipement are configured such that the active V2X sidelink UE is not transmitting. The UE under test shall transmit SL data and reserve future resources. The resource reservation is decoded by the active V2X sidelink UE. The point in time at which resource reservation from the UE under test is decoded by the active V2X sidelink UE defines the start of time period T2.

During T2, the active V2X sidelink UE reserves the same resource as the UE under test with high priority data no later than slot n- $T_{pre-empt}$.

Table A.9.1.4.2.1-1: Test Parameters for V2X UE Resource Pre-emption Tests for PSSCH-RSRP measurements

Parameter		Unit	Value	Comment
NR RF Channel Number			1	HD carrier in Band n47 and n38
Channel Bandwidth ($BW_{channel}$) Note 1		MHz	20 ($N_{RB,c}$ = 50) or 40 ($N_{RB,c}$ = 100)	
SCS		kHz	30	
V2X sidelink communication pre-configuration			As specified in Table A.3.21.2-1 and A.3.21.2-3	IE values unless specified otherwise in this test.
sl-TimeResource-r16 included in SL-ResourcePool in SL-ResourcePool in sl-TxPoolSelectedNormal-r16			10000000000000000000	Indicates the time resource of resource pool within *sl-Period*. (see TS 38.213 [3]) Note that this is for Tx pool.
sl-TimeResource-r16 included in SL-ResourcePool in sl-RxPool-r16			11111111111111111111	Indicates the time resource of resource pool within *sl-Period*. (see TS 38.213 [3]) Note that this is for Rx pool.
sl-NumSubchannel-r16 included in SL-ResourcePool			1	Indicates the number of subchannels in the corresponding resource pool, which consists of contiguous PRBs only
sl-SubchannelSize-r16 included in SL-ResourcePool			10	Indicates the minimum granularity in frequency domain for the sensing for PSSCH resource selection in the unit of PRB
sl-StartRB-Subchannel-r16 included in SL-ResourcePool			10	Indicates the lowest RB index of the subchannel with the lowest index.
Number of Active Sidelink UEs			1	
SL-Thres-RSRP			12	Corresponding -106 dBm as defined in Section 6.3.8 in TS38.331[2]
Active Sidelink UEs	V2X sidelink Communication preconfiguration		As specified in Table A.3.21.2-1 and A.3.21.2-3	IE values unless specified otherwise in this test.
	sl-TimeResource-r16 included in SL-ResourcePool		11111111111111111111	Indicates the bitmap of the TX and Rx resource pool, which is defined by repeating the bitmap within a SFN cycle (see TS 38.213[3])
	sl-NumSubchannel-r16 included in SL-ResourcePool		1	Indicates the number of sub-channels for TX resource pool
	sl-StartRB-Subchannel-r16 included in SL-ResourcePool		10	Indicates the lowest RB index of the subchannel with the lowest index.
	Sl-SubchannelSize-r16 included in SL-ResourcePool		10	Indicates the minimum granularity in frequency domain for the sensing for

				PSSCH resource selection in the unit of PRB
Timing offset among Active Sidelink Ues		μs	CP/2	Synchronous
Note 1: The UE is only required to be tested in one of the supported test configurations.				

Table A.9.1.4.2.1-2: Active Sidelink UE Specific Test Parameters for V2X UE Resource Pre-emption Tests for PSSCH-RSRP measurements

Parameter	Unit	Active Sidelink UE	
		T1	T2
NR RF Channel Number	-	1	
Channel Bandwidth ($BW_{channel}$) Note 3	MHz	20 ($N_{RB,c}$ = 50) or 40 ($N_{RB,c}$ = 100)	
PSCCH RMC (defined in A.3.21.3)	-	CC.1A HD	
PSSCH RMC (defined in A.3.21.3)	-	CD.1A HD	
N_{oc} Note1	dBm/30 kHz	N/A	-100
PSCCH $\hat{E}_s/N_{oc}$	dB		5
PSSCH $\hat{E}_s/N_{oc}$	dB		5
PSCCH $\hat{E}_s/I_{ot}$ Note2	dB		5
PSSCH $\hat{E}_s/I_{ot}$ Note2	dB		5
PSSCH-RSRP Note 2	dBm/30kHz		-95
Io Note 2	dBm/18MHz		-73.01
	dBm/36MHz		-73.01
Antenna Configuration	-	1x2	
Propagation Condition	-	AWGN	
Note 1: Interference from other Ues and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 2: Es/Iot, PSSCH-RSRP and Io have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 3: The UE is only required to be tested in one of the supported test configurations.			

A.9.1.4.2.2 Test Requirements

The test time T1 and T2 should be long enough. The UE under test is required to trigger resource reselection and not to transmit on the reserved resource at slot n when the high priority reservation is transmitted by the active V2X sidelink UE before n-$T_{pre\text{-}empt}$, where

$T_{pre\text{-}empt} = T_3 + T_{proc,0}$

T_3 = 5 slots and $T_{proc,0}$= 1 slot for FR1.

The rate of PSSCH transmissions on the resources at slot n shall be less than 10% during repeated tests.

A.9.1.4.3 Test for V2X UE Resource Re-evaluation

A.9.1.4.3.1 Test Purpose and Environment

The purpose of this test is to verify the requirements related to autonomous resource re-evaluation for V2X UE in mode 2 defined in clause 12.5. For this test, the UE is triggered by the test loop function or the upper layers to transmit for V2X Sidelink Communication.

The test parameters are given in Table A.9.1.4.3.1-1, A.9.1.4.3.1-2 and A.9.1.4.3.1-3 below. There are 130 active V2X sidelink UEs in this test. The first 100 active V2X sidelink UEs are scheduled with 50ms periodicity. The last 30 active V2X sidelink Ues are aperiodic service UE with retransmission reservation period equaling 15ms.

Both the UE under test and active V2X sidelink Ues select GNSS as synchronization reference source. The test system can emulate and send the GNSS signal to the test UE and active V2X sidelink Ues. The test parameters for GNSS signals are defined in B.4.1.

The test consists of three duration T0, T1, T2.

During T0, the signal from Test Equipement are configured. The resource occupied by the active V2X sidelink UEs is expected to be excluded in the resource selection procedure such that the measured PSSCH-RSRP is above the measurement threshold. The test equipment shall just configure the resource pool for the test UE without the MAC PDU for transmission channel configuration.

During T1, the signal from Test Equipement are configured. Some of the resource occupied by the active V2X sidelink Ues is expected to be excluded in the resource selection procedure such that the measured PSSCH-RSRP is above the measurement threshold and some of the resource occupied by the active V2X sidelink Ues is expected to be included in the resource selection procedure such that the measured PSSCH-RSRP is below the measurement threshold. The test system shall emulate the active V2X sidelink Ues to transmit PSCCH/PSSCH every 50ms according to the RSRP level specified in the Table A. 9.1.4.3.1-2, but UE #0~29 will be silent during T2.

At the end of T1, where slot index mod 100 = 99, the test equipment shall send one message with a SL-SCH MAC PDU as specified in Clause 6.1.6 in TS 38.321[7], in order to make sure that the UE under test shall be scheduled to periodically transmit PSCCH/PSSCH.

During T2, the additional aperiodic active V2X sidelink UEs from Test Equipement are configured in the beginning 30 slots, and the resource occupied by these active V2X sidelink UEs is expected to be excluded in the resource re-evaluation procedure such that the measured PSSCH-RSRP is above the measurement threshold shown in Table A. 9.1.4.3.1-2. The test system shall emulate the active V2X sidelink UEs to transmit PSCCH/PSSCH with the maximum number of reserved PSCCH/PSSCH resources equalling n2 and time resource assignment interval as 15ms.

During T2, the test UE is expeted to reselect the resources and transmit the PSCCH/PSSCH in the newly re-evaluated resources.

Table A.9.1.4.3.1-1: Test Parameters for V2X UE Resource Selection Tests for Re-evaluation

Parameter	Unit	Value	Comment
NR RF Channel Number		1	HD carrier in Band n47 and n38
Channel Bandwidth ($BW_{channel}$) Note 2	MHz	20 ($N_{RB,c}$ = 50) or 40 ($N_{RB,c}$ = 100)	
SCS	kHz	30	
V2X sidelink communication pre-configuration		As specified in Table A.3.21.2-2	IE values unless specified otherwise in this test.
sl-TimeResource-r16 included in SL-ResourcePool		1111111111111111111 1111111111111111111 1111111111111111111 1111111111111111111 1111111111111111111	Indicates the bitmap of the TX and Rx resource pool, which is defined by repeating the bitmap within a SFN cycle (see TS 38.213[3])
sl-NumSubchannel-r16 included in SL-ResourcePool		1	Indicates the number of sub-channels for TX resource pool
sl-SubchannelSize-r16 included in SL-ResourcePool		10	
sl-StartRB-Subchannel-r16		0	
Number of Active Sidelink UEs		130	Active Sidelink UE i = 0, .., 129

SL-Thres-RSRP-r16			13	Corresponding -104 dBm as defined in Section 6.3.5 in TS38.331[2]
Active Sidelink UEs(UE i=0-99)	V2X sidelink Communication preconfiguration		As specified in Table A.3.21.2-2	IE values unless specified otherwise in this test.
	sl-TimeResource-r16 included in SL-ResourcePool		$\{1_i\}^{Note1}$	Indicates the bitmap of the TX resource pool, which is defined by repeating the bitmap within a SFN cycle (see TS 38.213 [3])
	sl-NumSubchannel-r16 included in SL-ResourcePool		1	Indicates the number of sub-channels for TX resource pool
	sl-SubchannelSize-r16 included in SL-ResourcePool		10	Indicates the size of sub-channels for TX resource pool
	sl-ResourceReservePeriod2-r16	ms	50	
Active Sidelink UEs(UE i= 100-129)	V2X sidelink Communication preconfiguration		As specified in Table A.3.21.2-2	IE values unless specified otherwise in this test.
	sl-TimeResource-r16 included in SL-ResourcePool		$\{1_i\}^{Note1}$	Indicates the bitmap of the TX resource pool, which is defined by repeating the bitmap within a SFN cycle (see TS 38.213 [3])
	sl-NumSubchannel-r16 included in SL-ResourcePool		1	Indicates the number of sub-channels for TX resource pool
	sl-SubchannelSize included in SL-ResourcePool		10	Indicates the size of sub-channels for TX resource pool
	sl-MultiReserveResource-r16		enabled	
	sl-MaxNumPerReserve-r16		n2	
	sl-ResourceReservePeriod2-r16		0	Unit:ms
Timing offset among Active Sidelink UEs		µs	CP/2	Synchronous
T0		s	1	
T1		ms	50	
T2		ms	50	
Note 1: $\{1_i\}$ is a sequence of ninety-nine 0's with one 1 in (mod(i,100)+1)'th position. Note 2: The UE is only required to be tested in one of the supported test configurations.				

Table A.9.1.4.3.1-2: Active Sidelink UE Specific Test Parameters for V2X UE Resource Selection Tests for Re-evaluation (UE #0...99)

Parameter	Unit	Active Sidelink UE i (i = 0, .., 99)	
		T1	T2
NR RF Channel Number	-	1	
Channel Bandwidth ($BW_{channel}$) Note 7	MHz	20 ($N_{RB,c}$ = 50) or 40 ($N_{RB,c}$ = 100)	
PSCCH RMC (defined in A.3.21.3)	-	CC.1A HD	

PSSCH RMC (defined in A.3.21.3)	-	CD.1A HD	
N_{oc} Note1	dBm/SCS	-113	
PSSCH1 $\hat{E}_s/N_{oc}$ Note 3	dB	16	16
PSSCH2 $\hat{E}_s/N_{oc}$ Note 4	dB	2	2
PSSCH3 $\hat{E}_s/N_{oc}$ Note 5	dB	16	-infinity
PSSCH4 $\hat{E}_s/N_{oc}$ Note 6	dB	2	2
PSSCH1 $\hat{E}_s/I_{ot}$ Note2,3	dB	16	[-0.11] Note 10
		16	16 Note 11
PSSCH2 $\hat{E}_s/I_{ot}$ Note2,4	dB	2	[-14.11]
PSSCH3 $\hat{E}_s/I_{ot}$ Note2,5	dB	16	-infinity
PSSCH4 $\hat{E}_s/I_{ot}$ Note2,6	dB	2	2
PSSCH -RSRP1 Note 2, 3	dBm/SCS	-97	-97
PSSCH -RSRP2 Note 2, 4	dBm/SCS	-111	-111
PSSCH -RSRP3 Note 2, 5	dBm/SCS	-97	-infinity
PSSCH -RSRP4 Note 2, 6	dBm/SCS	-111	-111
Io Note 2, 8	dBm/18 MHz	-76.10	-76.10
	dBm/36 MHz	-76.10	-76.10
Io Note 2, 9	dBm/18 MHz	-88.08	[-75.93]
	dBm/36 MHz	-88.08	[-75.93]
Io Note 2, 10	dBm/18 MHz	-76.10	[-73.14]
	dBm/36 MHz	-76.10	[-73.14]
Io Note 2, 11	dBm/18 MHz	-76.10	-76.10
	dBm/36 MHz	-76.10	-76.10
Io Note 2, 12	dBm/18 MHz	-88.08	-88.08
	dBm/36 MHz	-88.08	-88.08
Antenna Configuration	-	1x2	
Propagation Condition	-	AWGN	

Note 1: Interference from other UEs and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 2: $\hat{E}_s/I_{ot}$, PSSCH-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 3: UE #50~64 and UE #85~99 will periodically occupy the subchannels on the slot with "#slot index mod 100" = #50-64 and #85-99.

Note 4: UE #30~49 will periodically occupy the subchannels on the slot with "#slot index mod 100" = #30-49.

Note 5: UE #0~29 will periodically occupy the subchannels on the slot with "#slot index mod 100" = #0-29.

Note 6: UE #65~84 will periodically occupy the subchannels on the slot with "#slot index mod 100" = #65-84.

Note 7: The UE is only required to be tested in one of the supported configurations.

Note 8: Calculated on slot #0~29.

Note 9: Calculated on slot #30~49.

Note 10: Calculated on slot #50~59.

Note 11: Calculated on slot #60~64 and slot #85~99.

Note 12: Calculated on slot #65~84.

Table A.9.1.4.3.1-3: Active Sidelink UE Specific Test Parameters for V2X UE Resource Selection Tests for Re-evaluation (UE #100…129)

Parameter	Unit	Active Sidelink UE i (i = 100, .., 129)	
		T1	T2
NR RF Channel Number	-	1	
Channel Bandwidth ($BW_{channel}$) Note 4	MHz	20 ($N_{RB,c}$ = 50) or 40 ($N_{RB,c}$ = 100)	
PSCCH RMC (defined in A.3.21.3)	-	CC.1A HD	
PSSCH RMC (defined in A.3.21.3)	-	CD.1 A HD	

N_{oc} Note1	dBm/SCS	-103	
PSSCH $\hat{E}_s/N_{oc}$	dB	-infinity	16
PSSCH $\hat{E}_s/I_{ot}$ Note2	dB	-infinity	16 Note 5
		-infinity	[11.88] Note 6
		-infinity	[-0.11] Note 7
PSSCH-RSRP Note 2, Note 3	dBm/SCS	-infinity	-97
Io Note 2, 5	dBm/18 MHz	-76.10	-76.10
	dBm/36 MHz	-76.10	-76.10
Io Note 2, 6	dBm/18 MHz	-88.08	[-75.93]
	dBm/36 MHz	-88.08	[-75.93]
Io Note 2, 7	dBm/18 MHz	-76.10	[-73.14]
	dBm/36 MHz	-76.10	[-73.14]
Antenna Configuration	-	1x2	
Propagation Condition	-	AWGN	

Note 1: Interference from other UEs and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: Es/Iot, PSSCH-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: UE #100~129 will occupy the subchannels on the slots with "#slot index mod 100"= #0-29 during T2.
Note 4: The UE is only required to be tested in one of the supported configurations.
Note 5: Calculated on slot #0~29.
Note 6: Calculated on slot #30~49.
Note 7: Calculated on slot #50~59.

A.9.1.4.3.2 Test Requirements

The rate of PSSCH transmissions on the resources of the subchannels which are occupied by UE #65-84 shall be more than 90% during T2.

A.9.1.4.4 Test for V2X UE Autonomous Resource Selection/Reselection with Periodic Sensing

A.9.1.4.4.1 Test Purpose and Environment

The purpose of this test is to verify the requirements related to autonomous resource selection / reselection for V2X UE in mode 2 with partial sensing support defined in clause 12.5. For this test, the UE is triggered by the test loop function or the upper layers to transmit for V2X Sidelink Communication.

The test parameters are given in Table A.9.1.4.4.1-1and A. 9.1.4.4.1-2 below. There are 100 active V2X sidelink UEs (UE0~UE99) in this test. Both the UE under test and active V2X sidelink UEs select GNSS as synchronization reference source. The test system can emulate and send the GNSS signal to the test UE and active V2X sidelink UEs. The test parameters for GNSS signals are defined in B.4.1. The test system shall emulate the active V2X sidelink UEs to transmit PSCCH/PSSCH every 10ms. At the beginning of whole test, the test equipment shall send one message with a SL-SCH MAC PDU as specified in Clause 6.1.6 in TS 38.321[7] and ensure that the UE under test needs to continuously transmit PSCCH/PSSCH with 10ms period. Upon receiving the MAC PDU, UE starts resource selection to transmit PSCCH/PSSCH based on the available sensing results.

The test consists of two duration T1 and T2. During T1, the signals from Test Equipment are configured such that

- the measured PSSCH-RSRP for 40 active V2X sidelink UEs(UE20~UE59) is above the measurement threshold, and the resource occupied by the 40 active V2X sidelink UEs is expected to be excluded in the resource selection procedure and,

- the measured PSSCH-RSRP for other 60 active V2X sidelink UEs(UE0~UE19, UE60~UE99) is low the measurement threshold, and the resource occupied by the 60 active V2X sidelink UEs is expected to be included in the resource selection procedure.

During T2, the signals from Test Equipment are configured such that

- the measured PSSCH-RSRP for the 40 active V2X sidelink UEs(UE20~UE59) is below the measurement threshold, and the resource occupied by the 40 active V2X sidelink UEs is expected to be included in the resource selection procedure and,

- the measured PSSCH-RSRP for other 60 active V2X sidelink UEs(UE0~UE19, UE60~UE99) is above the measurement threshold, and the resource occupied by the 60 active V2X sidelink UEs is expected to be excluded in the resource selection procedure.

Table A.9.1.4.4.1-1: Test Parameters for V2X UE Autonomous Resource Selection/Reselection Tests with Periodic Sensing

Parameter		Unit	Value	Comment
NR RF Channel Number			1	TDD carrier in Band n47 or n38
Channel Bandwidth ($BW_{channel}$) Note 2		MHz	20 ($N_{RB,c}$ = 50) or 40 ($N_{RB,c}$ = 100)	
SCS		kHz	30	
V2X sidelink communication pre-configuration			As specified in Table A.3.21.2-1 and A.3.21.2-3	IE values unless specified otherwise in this test.
sl-TimeResource-r16 included in SL-ResourcePool			1111111111	Indicates the bitmap of the TX and Rx resource pool, which is defined by repeating the bitmap within a SFN cycle (see TS 38.213[3])
sl-NumSubchannel-r16 included in SL-ResourcePool			5	Indicates the number of sub-channels for TX resource pool
sl-SubchannelSize-r16 included in SL-ResourcePool			10	Indicates the minimum granularity in frequency domain for the sensing for PSSCH resource selection in the unit of PRB
Number of Active Sidelink UEs			100	Active Sidelink UE i = 0, .., 49
SL-ThresPSSCH-RSRP			12	Corresponding -106 dBm as defined in Section 6.3.5 in TS38.331[2]
Active Sidelink UEs (UE i = 0, .., 99)	V2X sidelink Communication preconfiguration		As specified in Table A.3.21.2-1 And A.3.21.2-3	IE values unless specified otherwise in this test.
	sl-TimeResource-r16 included in SL-ResourcePool		{1$_i$} Note1	Indicates the bitmap of the TX and Rx resource pool, which is defined by repeating the bitmap within a SFN cycle (see TS 38.213[3])
	sl-NumSubchannel-r16 included in SL-ResourcePool		1	Indicates the number of sub-channels for TX resource pool

	sl-StartRB-Subchannel-r16 included in SL-ResourcePool		floor(i/20)x10	Indicates the lowest RB index of the subchannel with the lowest index. UE 0~19 start RB=0; UE 20~39 start RB=10; UE 40~59 start RB=20; UE 60~79 start RB=30; UE 80~99 start RB=40;
	sl-SubchannelSize-r16 included in SL-ResourcePool		10	Indicates the minimum granularity in frequency domain for the sensing for PSSCH resource selection in the unit of PRB
	sl-ResourceReservePeriod2-r16	ms	10	
Timing offset among Active Sidelink UEs		μs	CP/2	Synchronous
Note 1: {1i} is a sequence of nine 0's with one 1 in (mod(i,10)+1'th position. Note 2: The UE is only required to be tested in one of the supported test configurations.				

Table A.9.1.4.4.1-2: Active Sidelink UE Specific Test Parameters for V2X UE Autonomous Resource Selection/Reselection Tests with Periodic Sensing

Parameter	Unit	Active Sidelink UE i (i = 0, .., 99)	
		T1	T2
NR RF Channel Number	-	1	
Channel Bandwidth ($BW_{channel}$) Note 5	MHz	20 ($N_{RB,c}$ = 50) or 40 ($N_{RB,c}$ = 100)	
SCS	kHz	30	
PSCCH RMC (defined in A.3.21.3)	-	CC.1A HD	
PSSCH RMC (defined in A.3.21.3)	-	CD.1A HD	
N_{oc} Note1	dBm/30 kHz	-111	-121
$\hat{E}_s/N_{oc}$ Note3	dB	10	
$\hat{E}_s/I_{ot}$ Note2,3	dB	10	
$\hat{E}_s/N_{oc}$ Note4	dB	0	20
$\hat{E}_s/I_{ot}$ Note2,4	dB	0	20
PSSCH-RSRP1 Note 2,3	dBm/30k Hz	-101	-111
PSSCH -RSRP2 Note 2,4	dBm/30k Hz	-111	-101
SL-RSSI1 Note 2,3	dBm/3.6 MHz	-79.79	-89.79
SL-RSSI2 Note 2,4	dBm/3.6 MHz	-87.20	-80.17
Antenna Configuration	-	1x2	
Propagation Condition	-	AWGN	

Note 1:	Interference from other UEs and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2:	Es/Iot, PSSCH-RSRP and SL-RSSI levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	For UE 20 to 59, occupying subchannel #1/2
Note 4:	For UE 0 to 19 and 60 to 99, occupying subchannel #0/3/4
Note 5:	The UE is only required to be tested in one of the supported test configurations.

A.9.1.4.4.2 Test Requirements

The test time T1 and T2 should be long enough. The rate of PSSCH transmissions on the resources on subchannel #1 or #2 shall be less than 10% during T1. The rate of PSSCH transmissions on the resources on subchannel #1 or #2 shall be more than 90% during T2.

A.9.1.4.5 Test for V2X UE Autonomous Resource Selection/Reselection with Contiguous Sensing

A.9.1.4.5.1 Test Purpose and Environment

The purpose of this test is to verify the requirements related to autonomous resource selection / reselection for V2X UE in mode 2 performing contiguous sensing configured with M=31 defined in clause 12.5. For this test, the UE is triggered by the test loop function or the upper layers to transmit for V2X Sidelink Communication.

The test parameters are given in Table A.9.1.4.5.1-1and A. 9.1.4.5.1-2 below. There are 50 active V2X sidelink UEs (UE0~UE49) in this test. Both the UE under test and active V2X sidelink UEs select GNSS as synchronization reference source. The test system can emulate and send the GNSS signal to the test UE and active V2X sidelink UEs. The test parameters for GNSS signals are defined in B.4.1. The test system shall emulate the active V2X sidelink UEs to transmit PSCCH/PSSCH every 5ms. Starting from the beginning of whole test, the test equipment shall send a message with a SL-SCH MAC PDU every 5ms as specified in Clause 6.1.6 in TS 38.321[7] to schedule an aperiodic transmission and ensure that the UE under test needs continuously transmit PSCCH/PSSCH every 5ms.

The test consists of two duration T1 and T2. During T1, the signal from Test Equipment are configured such that

- the measured PSSCH-RSRP for 20 active V2X sidelink UEs (UE10~UE29) is above the measurement threshold, and the resource occupied by the 20 active V2X sidelink UEs is expected to be excluded in the resource selection procedure and,

- the measured PSSCH-RSRP for other 30 active V2X sidelink UEs(UE0~UE9, UE30~UE49) is low the measurement threshold, and the resource occupied by the 30 active V2X sidelink UEs is expected to be included in the resource selection procedure.

During T2, the signal from Test Equipment are configured such that

- the measured PSSCH-RSRP for the 20 active V2X sidelink UEs(UE10~UE29) is below the measurement threshold, and the resource occupied by the 20 active V2X sidelink UEs is expected to be included in the resource selection procedure and,

- the measured PSSCH-RSRP for other 30 active V2X sidelink UEs(UE0~UE9, UE30~UE49) is above the measurement threshold, and the resource occupied by the 30 active V2X sidelink UEs is expected to be excluded in the resource selection procedure.

Table A.9.1.4.5.1-1: Test Parameters for V2X UE Autonomous Resource Selection/Reselection Tests with Contiguous Sensing

Parameter		Unit	Value	Comment
NR RF Channel Number			1	TDD carrier in Band n47 or n38
Channel Bandwidth ($BW_{channel}$) Note 2		MHz	20 ($N_{RB,c}$ = 50) or 40 ($N_{RB,c}$ = 100)	
SCS		kHz	30	
V2X sidelink communication pre-configuration			As specified in Table A.3.21.2-1 and A.3.21.2-3	IE values unless specified otherwise in this test.
sl-TimeResource-r16 included in SL-ResourcePool			1111111111	Indicates the bitmap of the TX and Rx resource pool, which is defined by repeating the bitmap within a SFN cycle (see TS 38.213[3])
sl-NumSubchannel-r16 included in SL-ResourcePool			5	Indicates the number of sub-channels for TX resource pool
sl-SubchannelSize-r16 included in SL-ResourcePool			10	Indicates the minimum granularity in frequency domain for the sensing for PSSCH resource selection in the unit of PRB
Number of Active Sidelink UEs			50	Active Sidelink UE i = 0, .., 49
SL-ThresPSSCH-RSRP			12	Corresponding -106 dBm as defined in Section 6.3.5 in TS38.331[2]
Active Sidelink UEs (UE i = 0, .., 49)	V2X sidelink Communication preconfiguration		As specified in Table A.3.21.2-1 And A.3.21.2-3	IE values unless specified otherwise in this test.
	sl-TimeResource-r16 included in SL-ResourcePool		$\{1_i\}$ Note1	Indicates the bitmap of the TX and Rx resource pool, which is defined by repeating the bitmap within a SFN cycle (see TS 38.213[3])
	sl-NumSubchannel-r16 included in SL-ResourcePool		1	Indicates the number of sub-channels for TX resource pool
	sl-StartRB-Subchannel-r16 included in SL-ResourcePool		floor(i/10)x10	Indicates the lowest RB index of the subchannel with the lowest index. UE 0~9 start RB=0; UE 10~19 start RB=10; UE 20~29 start RB=20; UE 30~39 start RB=30; UE 40~49 start RB=40;
	sl-SubchannelSize-r16 included in SL-ResourcePool		10	Indicates the minimum granularity in frequency domain for the sensing for PSSCH resource selection in the unit of PRB
Timing offset among Active Sidelink UEs		μs	CP/2	Synchronous

Note 1: $\{1_i\}$ is a sequence of nine 0's with one 1 in (mod(i,10)+1'th position.
Note 2: The UE is only required to be tested in one of the supported test configurations.

Table A.9.1.4.5.1-2: Active Sidelink UE Specific Test Parameters for V2X UE Autonomous Resource Selection/Reselection Tests with Contiguous Sensing

Parameter	Unit	Active Sidelink UE i (i = 0, .., 49)	
		T1	T2
NR RF Channel Number	-	1	
Channel Bandwidth ($BW_{channel}$) Note 5	MHz	20 ($N_{RB,c}$ = 50) or 40 ($N_{RB,c}$ = 100)	
SCS	kHz	30	
PSCCH RMC (defined in A.3.21.3)	-	CC.1A HD	
PSSCH RMC (defined in A.3.21.3)	-	CD.1A HD	
N_{oc} Note1	dBm/30 kHz	-111	-121
$\hat{E}_s/N_{oc}$ Note3	dB	10	
$\hat{E}_s/I_{ot}$ Note2,3	dB	10	
$\hat{E}_s/N_{oc}$ Note4	dB	0	20
$\hat{E}_s/I_{ot}$ Note2,4	dB	0	20
PSSCH-RSRP1 Note 2,3	dBm/30k Hz	-101	-111
PSSCH -RSRP2 Note 2,4	dBm/30k Hz	-111	-101
SL-RSSI1 Note 2,3	dBm/3.6 MHz	-79.79	-89.79
SL-RSSI2 Note 2,4	dBm/3.6 MHz	-87.20	-80.17
Antenna Configuration	-	1x2	
Propagation Condition	-	AWGN	

Note 1: Interference from other UEs and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: Es/Iot, PSSCH-RSRP and SL-RSSI levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: For UE 10 to 29, occupying subchannel #1/2
Note 4: For UE 0 to 9 and 30 to 49, occupying subchannel #0/3/4
Note 5: The UE is only required to be tested in one of the supported test configurations.

A.9.1.4.5.2 Test Requirements

The test time T1 and T2 should be long enough. The rate of PSSCH transmissions on the resources on subchannel #1 or #2 shall be less than 10% during T1. The rate of PSSCH transmissions on the resources on subchannel #1 or #2 shall be more than 90% during T2.

A.9.1.4.6 Test for V2X UE Autonomous Resource Selection/Reselection in SL-DRX

A.9.1.4.6.1 Test Purpose and Environment

The purpose of this test is to verify the requirements related to autonomous resource selection / reselection for V2X UE in mode 2 defined in clause 12.5. For this test, the UE is triggered by the test loop function or the upper layers to transmit for V2X Sidelink Communication.

The test parameters are given in Table A.9.1.4.6.1-1and A. 9.1.4.6.1-2 below. There are 50 active V2X sidelink UEs (UE0~UE49) and another V2X sidelink UE as the receiver for the UE under test in this test. The UE under test, the

receiver UE and active V2X sidelink UEs select GNSS as synchronization reference source. The test system can emulate and send the GNSS signal to the test UE, the receiver V2X sidelink UE and active V2X sidelink UEs. The test parameters for GNSS signals are defined in B.4.1. The test system shall emulate the active V2X sidelink UEs to transmit PSCCH/PSSCH every 5ms. At the beginning of whole test, the test equipment shall send one message with a SL-SCH MAC PDU as specified in Clause 6.1.6 in TS 38.321[7] and ensure that the UE under test needs continuously transmit PSCCH/PSSCH to the receiver SL UE.

The receiver UE runs one DRx cycle with 40ms cycle length and 10ms on time, 0ms inactivity timer, and 10ms offset. The UE under test and the 50 active UEs are in non-DRx mode.

The test consists of two duration T1 and T2. During T1, the signals from Test Equipment are configured such that

- the measured PSSCH-RSRP for 20 active V2X sidelink UEs(UE10~UE29) is above the measurement threshold, and the resource occupied by the 20 active V2X sidelink UEs is expected to be excluded in the resource selection procedure and,

- the measured PSSCH-RSRP for other 30 active V2X sidelink UEs(UE0~UE9, UE30~UE49) is low the measurement threshold, and the resource occupied by the 30 active V2X sidelink UEs is expected to be included in the resource selection procedure.

During T2, the signals from Test Equipment are configured such that

- the measured PSSCH-RSRP for the 20 active V2X sidelink UEs(UE20~UE29) is below the measurement threshold, and the resource occupied by the 20 active V2X sidelink UEs is expected to be included in the resource selection procedure and,

- the measured PSSCH-RSRP for other 30 active V2X sidelink UEs(UE0~UE9, UE30~UE49) is above the measurement threshold, and the resource occupied by the 30 active V2X sidelink UEs is expected to be excluded in the resource selection procedure.

Table A.9.1.4.6.1-1: Test Parameters for V2X UE Autonomous Resource Selection/Reselection Tests in SL-DRX

Parameter	Unit	Value	Comment
NR RF Channel Number		1	TDD carrier in Band n47 or n38
Channel Bandwidth ($BW_{channel}$) Note 2	MHz	20 ($N_{RB,c}$ = 50) or 40 ($N_{RB,c}$ = 100)	
SCS	kHz	30	
V2X sidelink communication pre-configuration		As specified in Table A.3.21.2-1 and A.3.21.2-3	IE values unless specified otherwise in this test.
sl-TimeResource-r16 included in SL-ResourcePool		1111111111	Indicates the bitmap of the TX and Rx resource pool, which is defined by repeating the bitmap within a SFN cycle (see TS 38.213[3])
sl-NumSubchannel-r16 included in SL-ResourcePool		5	Indicates the number of sub-channels for TX resource pool
sl-SubchannelSize-r16 included in SL-ResourcePool		10	Indicates the minimum granularity in frequency domain for the sensing for PSSCH resource selection in the unit of PRB
Number of Active Sidelink UEs		50	Active Sidelink UE i = 0, .., 49
SL-ThresPSSCH-RSRP		12	Corresponding -106 dBm as defined in Section 6.3.5 in TS38.331[2]

Active Sidelink UEs (UE i = 0, .., 49)	V2X sidelink Communication preconfiguration		As specified in Table A.3.21.2-1 And A.3.21.2-3	IE values unless specified otherwise in this test.
	sl-TimeResource-r16 included in SL-ResourcePool		$\{1_i\}$ Note1	Indicates the bitmap of the TX and Rx resource pool, which is defined by repeating the bitmap within a SFN cycle (see TS 38.213[3])
	sl-NumSubchannel-r16 included in SL-ResourcePool		1	Indicates the number of sub-channels for TX resource pool
	sl-StartRB-Subchannel-r16 included in SL-ResourcePool		floor(i/10)x10	Indicates the lowest RB index of the subchannel with the lowest index. UE 0~9 start RB=0; UE 10~19 start RB=10; UE 20~29 start RB=20; UE 30~39 start RB=30; UE 40~49 start RB=40;
	sl-SubchannelSize-r16 included in SL-ResourcePool		10	Indicates the minimum granularity in frequency domain for the sensing for PSSCH resource selection in the unit of PRB
	sl-ResourceReservePeriod2-r16	ms	5	
Timing offset among Active Sidelink UEs		µs	CP/2	Synchronous
Note 1: $\{1_i\}$ is a sequence of nine 0's with one 1 in (mod(i,10)+1'th position. Note 2: The UE is only required to be tested in one of the supported test configurations.				

Table A.9.1.4.6.1-2: Active Sidelink UE Specific Test Parameters for V2X UE Autonomous Resource Selection/Reselection Tests in SL-DRX

Parameter	Unit	Active Sidelink UE i (i = 0, .., 49)	
		T1	T2
NR RF Channel Number	-	1	
Channel Bandwidth ($BW_{channel}$) Note 5	MHz	20 ($N_{RB,c}$ = 50) or 40 ($N_{RB,c}$ = 100)	
SCS	kHz	30	
PSCCH RMC (defined in A.3.21.3)	-	CC.1A HD	
PSSCH RMC (defined in A.3.21.3)	-	CD.1A HD	
N_{oc} Note1	dBm/30 kHz	-111	-121
$\hat{E}_s/N_{oc}$ Note3	dB	10	
$\hat{E}_s/I_{ot}$ Note2,3	dB	10	
$\hat{E}_s/N_{oc}$ Note4	dB	0	20
$\hat{E}_s/I_{ot}$ Note2,4	dB	0	20
PSSCH-RSRP1 Note 2,3	dBm/30kHz	-101	-111

PSSCH -RSRP2 Note 2,4	dBm/30kHz	-111	-101
SL-RSSI1 Note 2,3	dBm/3.6 MHz	-79.79	-89.79
SL-RSSI2 Note 2,4	dBm/3.6 MHz	-87.20	-80.17
Antenna Configuration	-	1x2	
Propagation Condition	-	AWGN	

Note 1: Interference from other UEs and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: Es/Iot, PSSCH-RSRP and SL-RSSI levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: For UE 10 to 29, occupying subchannel #1/2
Note 4: For UE 0 to 9 and 30 to 49, occupying subchannel #0/3/4
Note 5: The UE is only required to be tested in one of the supported test configurations.

A.9.1.4.6.2 Test Requirements

The test time T1 and T2 should be long enough. The rate of PSSCH transmissions on the resources on subchannel #1 or #2 shall be less than 10% during T1. The rate of PSSCH transmissions on the resources on subchannel #1 or #2 shall be more than 90% during T2. The PSSCH transmission should happen only in the receiver SL UE SL-DRX active time.

A.9.1.5 Test for Congestion Control Measurement

A.9.1.5.1 Test Purpose and Environment

The purpose of this test is to verify the congestion control measurement requirements in section 12.6. For UE supporting NR Uu and sidelink operation, this test will also verify that V2X UE makes correct reporting of an event.

The test parameters are given in Table A.9.1.5.1-1, Table A.9.1.5.1-2 , A.9.1.5.1-3 and A.9.1.5.1-4 below. There are 4 active V2X sidelink UEs in this test. The test system shall emulate the active sidelink UE to transmit PSCCH/PSSCH every 50ms. Additionally, For UE supporting NR Uu and sidelink operation, there is an active Cell (Cell 1) in this test. For UE only supporting NR sidelink, There are no active cell and GNSS is reliable during the whole test. The test system can emulate and send the GNSS signal to the test UE. The test parameters for GNSS signals are defined in B.4.1.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During T1, all of active V2X sidelink UEs are configured to transmit PSCCH/PSSCH with lower transmission power every 50ms. During T2, all of active V2X sidelink UEs are configured to transmit PSCCH/PSSCH with higher transmission power every 50ms.

For UE supporting NR Uu and sidelink operation, the UE under test and all active sidelink UEs select PCell as synchonization source In the measurement control information it is indicated to the V2X UE that event-triggered reporting with Event C1 is used.

For UE only supporting NR sidelink, the UE under test and all active sidelink UEs select GNSS as synchonization source. The UE is triggered by the test loop function or the upper layers to transmit for V2X Sidelink Communication.

For UE supporting NR Uu and sidelink operation, Supported test configurations for FR1 NR cell are shown in Table A.9.1.5.1.1-1.

Table A.9.1.5.1.1-1: Supported Test Configurations for FR1 NR cell (only for UE supporting both NR Uu and sidelink operation)

Configuration	Description
1	NR Uu: FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NR Uu: TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
3	NR Uu: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.9.1.5.1-2: General test parameters for Congestion Control Measurement Test for V2X UE

Parameter		Unit	Value	Comment
NR RF Channel Number			1	HD carrier in Band n47 or n38
Channel Bandwidth ($BW_{channel}$)[Note 2]		MHz	20 ($N_{RB,c}$ = 50) or 40 ($N_{RB,c}$ = 100)	
SCS		kHz	30	
V2X sidelink communication configuration			As specified in Table A.3.21.2-1 and A.3.21.2-3	IE values unless specified otherwise in this test.
sl-TimeResource-r16 included in SL-ResourcePool			1111111111111111111 1111111111111111111 1111111111111111111 1111111111111111111 1111111111111111111	Indicates the bitmap of the TX and Rx resource pool, which is defined by repeating the bitmap within a SFN cycle (see TS 38.213[3])
sl-NumSubchannel-r16 included in SL-ResourcePool			1	ENUMERATED {n1}
sl-SubchannelSize included in SL-ResourcePool			10	ENUMERATED {n10}
sl-StartRB-Subchannel-r16			0	
threshS-RSSI-CBR			19	Corresponding -74dBm as defined in Section 6.3.8 in TS38.331[2]
Active Cell [Note 3]			Cell 1	
Number of Active Sidelink UEs every 50ms			4	Active Sidelink UE i, where i = 0, 1, 2, 3
Active Sidelink UEs (i = 0,1,2,3)	V2X sidelink Communication configuration		As specified in Table A.3.21.2-1 and A.3.21.2-3	IE values unless specified otherwise in this test.
	sl-TimeResource-r16 included in SL-ResourcePool		{1_i}[Note1]	Indicates the bitmap of the TX and Rx resource pool, which is defined by repeating the bitmap within a SFN cycle (see TS 38.213[3])
	sl-NumSubchannel-r16 included in SL-ResourcePool		1	
	sl-SubchannelSize included in SL-ResourcePool		10	
Timing offset between V2X UE and Active Sidelink UEs		μs	CP/2	Synchronous
c1-Threshold-r16[Note 3]			2	Corresponding 0.02 as defined in Section 6.3.2 in TS38.331[2]
sl-CBR-RangeConfigList-r16 [Note 4]			[2 100]	Two ranges are defined by this list: 0 to 0.02 and 0.02 to 1
sl-CR-Limit-r16 [Note 4]			10000 and 10	Corresponding to the two CBR ranges: if CBR > 0.02, CR ≤ 0.001, otherwise CR > 0.001

sl-Thres-RSRP-r16 Note 4		12	Configure threshold <-98.64dBm/30kHz to ensure not blocking transmission
Hysteresis		0	
Time To Trigger	s	0	
Filter coefficient		0	L3 filtering is not used
T1	s	5	
T2	s	5	

Note 1: {1$_i$} is a sequence of ninety nine 0's with one 1 in i+1'th position.
Note 2: The UE is only required to be tested in one of the channel bandwidths.
Note 3: Only for UE supporting both Uu and sidelink operation.
Note 4: Only for UE supporting sidelink operation but not supporting Uu.

Table A.9.1.5.1-3: Active sidelink UE specific test parameters for Congestion Control Measurement Test for V2X UE

Parameter	Unit	Active Sidelink UE *i* (*i* = 0, 1, 2, 3)	
		T1	T2
NR RF Channel Number		1	
Channel Bandwidth ($BW_{channel}$) Note 7	MHz	20 ($N_{RB,c}$ = 50) or 40 ($N_{RB,c}$ = 100)	
PSCCH RMC (defined in A.3.21.3)		CC.1A HD	
PSSCH RMC (defined in A.3.21.3)		CD.1A HD	
N_{oc} Note1	dBm/30 kHz	-103	
$\hat{E}_s / N_{oc}$	dB	4.35	10.32
SL-RSSI1 Note 2,3	dBm/3.6 MHz	-76.5	-71.5
SL-RSSI2 Note 2,4	dBm/3.6 MHz	-82.21	-82.21
Io1 Note 2,5	dBm/18 MHz	-76.5	-71.5
	dBm/36 MHz	-76.5	-71.5
Io2 Note 2,6	dBm/18 MHz	-82.21	-82.21
	dBm/36 MHz	-82.21	-82.21
Propagation Condition	-	AWGN	

Note 1: Interference from other UEs and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SL-RSSI1, SL-RSSI2, Io1 and Io2 levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: SL-RSSI1 is the SL-RSSI level measured on the slot# 0 - 3 with "SFN mod 5 = 0".
Note 4: SL-RSSI2 is the SL-RSSI level measured on the slot# 4-9 with "SFN mod 5 = 0" and the slot# 0-9 with "SFN mod 5 = 1,…, 4".
Note 5: Io1 is the Io level measured on the slot# 0 - 3 with "SFN mod 5 = 0".
Note 6: Io2 is the Io level measured on the slot# 4-9 with "SFN mod 5 = 0" and the slot# 0-9 with "SFN mod 5 = 1,…, 4".
Note 7: The UE is only required to be tested in one of the supported test configurations.

Table A.9.1.5.1-4: Cell Test Parameters for Congestion Control Measurement Test for V2X UE (only for UE supporting both NR Uu and sidelink operation)

Parameter		Unit	Cell 1
RF Channel Number			2
Duplex Mode	Config 1		FDD
	Config 2,3		TDD
TDD configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1

	Config 3		TDDConf.2.1
Channel Bandwidth ($BW_{channel}$)	Config 1,2	MHz	10: $N_{RB,c}$ = 52
	Config 3		40: $N_{RB,c}$ = 106
Initial BWP Configuration			DLBWP.0.1 ULBWP.0.1
Dedicated BWP Configuration			DLBWP.1.1 ULBWP.1.1
DRX Cycle			N/A
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD
	Config 2		SR.1.1 TDD
	Config 3		SR.2.1 TDD
CORESET Reference Channel	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
SSB configuration	Config 1,2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTC Configuration			SMTC.2
OCNG Patterns			OP.1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note2	Config 1,2,3	dBm/15 kHz	-98
N_{oc} Note2	Config 1,2	dBm/SCS	-98
	Config 3		-95
$\hat{E}_s / N_{oc}$		dB	3
SS-RSRP Note3	Config 1,2	dBm/SCS	-95
	Config 3		-92
Io Note 3	Config 1,2	dBm/9.36 MHz	-65.2
	Config 3	dBm/38.1 MHz	-59.2
Propagation Condition			AWGN

Note 1: OCNG shall be used such that cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.9.1.5.2 Test Requirements

For UEs that support NR Uu and sidelink operation, the UEs shall not send event C1 triggered measurement reports during T1 and shall send event C1 triggered measurement reports during T2.

For UEs that support sidelink operation only, the UE channel occupancy ratio shall be larger than 0.001 during T1, and the UE channel occupancy ratio shall be smaller than 0.001 curing T2.

The rate of correct events observed during repeated tests shall be at least 98%.

A.9.1.6 Test for Interruption

A.9.1.6.1 Test for Interruption to WAN due to V2X Sidelink Communication

A.9.1.6.1.1 Test Purpose and Environment

The purpose of this test is to verify the requirements related to interruptions due to V2X sidelink communication defined in clause 12.7.1 under the following additional conditions:

- The UE is out of coverage on the V2X sidelink carrier and is associated with a serving cell on a non-V2X sidelink carrier

This test is applicable for V2X sidelink communication capable UEs that support inter-band concurrent V2X sidelink operation.

For this test, the UE is triggered by the test loop function or the upper layers to monitor V2X sidelink communication.

The test parameters are given in Table A.9.1.6.1.1-1, Table A.9.1.6.1.1-2, Table A.9.1.6.1.1-3 and Table A.9.1.6.1.1-4. The test consists of one active cell (PCell) on the serving RF channel 1, and there are no active cells on RF channel 2. On RF channel 2, the test consists of 8 active Sidelink UEs in this test transmitting V2X sidelink communication. The UE under test and all active sidelink UEs select the active cell as synchonization source.

The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively.

During T1, the UE is in RRC_IDLE and monitoring the V2X sidelink communication transmission from other active Sidelink UEs on the V2X sidelink communication resources.

During T2, the test system establishes a RRC connection with the UE. No PDSCH traffic is scheduled for UE, and the UE is expected to transmit *SidelinkUEInformationNR* indicating *sl-RxInterestedFreqList*. On reception of *SidelinkUEInformationNR*, the test system shall send RRC reconfiguration message to the UE and wait for the UE to respond with RRC reconfiguration complete message before transitioning to T3. If the UE does not transmit *SidelinkUEInformationNR* for up to 2 second, the test system shall transition to T3.

During T3, the UE is scheduled with PDSCH traffic on PCell downlink. The test system will count the missed ACK/NACKs during T3 to verify the allowed interruptions during V2X sidelink communication.

Table A.9.1.6.1.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	NR Uu: FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NR Uu: TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
3	NR Uu: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.9.1.6.1.1-2: Test Parameters for Interruptions due to V2X Sidelink Communication

Parameter	Unit	Value	Comment
RF Channel Number	-	1, 2	RF channel 1 is non-V2X sidelink carrier RF channel 2 is V2X sidelink carrier
SCS	kHz	30	
Active cell	-	Cell 1	PCell on RF channel number 1
CP length of Cell 1	-	Normal	
T1	s	5.12	

T2	s	Up to receiving RRC reconfiguration setup complete from the UE, or up to 2 second if UE does not transmit *SidelinkUEInformationNR* during this period.	
T3	s	10	

Table A.9.1.6.1.1-3: Sidelink Communication Configuration for Interruptions due to V2X Sidelink Communication

Parameter		Unit	Value	Comment
RF Channel Number		-	2	HD carrier in Band n47 or n38
Channel Bandwidth ($BW_{channel}$) Note 1		MHz	20 ($N_{RB,c}$ = 50) or 40 ($N_{RB,c}$ = 100)	
V2X sidelink Communication configuration		-	As specified in section A.3.21.2	IE values unless specified otherwise in this test.
Number of Active Sidelink UEs		-	8	Active Sidelink UE i = 0, .., 7
Active Sidelink UEs (UE i = 0, .., 7)	V2X sidelink Communication configuration	-	As specified in section A.3.21.2	IE values unless specified otherwise in this test.
	PSCCH Reference Measurement Channel	-	CC.1A HD	As specified in Table A.3.21.3-1
	PSSCH Reference Measurement Channel	-	CD.1A HD	As specified in Table A.3.21.3-2
	sl-NumSubchannel-r16 included in SL-ResourcePool	-	1	Indicates the number of sub-channels for TX resource pool
	sl-StartRB-Subchannel-r16 included in SL-ResourcePool	-	i	Indicates the lowest RB index of the subchannel with the lowest index for active Sidelink UE i = 0, .., 7.
	PSBCH-RSRP	dBm/30kHz	-95	
Note 1: The UE is only required to be tested in one of the supported test configurations.				

Table A.9.1.6.1.1-4: Cell specific test parameters for interruptions due to V2X slidelink communication

Parameter		Unit	Cell 1		
			T1	T2	T3
RF Channel Number			1		
UE RRC state			IDLE	CONNECTED	
Duplex Mode	Config 1		FDD		
	Config 2,3		TDD		
TDD configuration	Config 1		Not Applicable		
	Config 2		TDDConf.1.1		
	Config 3		TDDConf.2.1		
Channel Bandwidth ($BW_{channel}$)	Config 1,2	MHz	10: $N_{RB,c}$ = 52		
	Config 3		40: $N_{RB,c}$ = 106		
Initial BWP Configuration			DLBWP.0.1 ULBWP.0.1		
Dedicated BWP Configuration			DLBWP.1.1 ULBWP.1.1		
DRX Cycle			N/A		
PDSCH Reference measurement channel	Config 1		N/A	None	SR.1.1 FDD
	Config 2		N/A	None	SR.1.1 TDD
	Config 3		N/A	None	SR.2.1 TDD

CORESET Reference Channel	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
SSB configuration	Config 1,2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTC Configuration			SMTC.2
OCNG Patterns			OP.1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note2	Config 1,2,3	dBm/15 kHz	-98
N_{oc} Note2	Config 1,2	dBm/SCS	-98
	Config 3		-95
$\hat{E}_s / N_{oc}$		dB	3
SS-RSRP Note3	Config 1,2	dBm/SCS	-95
	Config 3		-92
Io Note 3	Config 1,2	dBm/9.36 MHz	-65.3
	Config 3	dBm/38.1 MHz	-59.2
Antenna Configuration			1x2
Propagation Condition			AWGN

Note 1: OCNG shall be used such that cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.9.1.6.1.2 Test Requirements

The UE shall be continuously scheduled on PCell on RF channel 1 during T3. During T3, the interruption on PCell shall not be more than the values specified in clause 12.7.1..

A.9.1.6.2 Test for interruption to WAN at transitions between active and non-active during SL-DRX in asynchronous case

A.9.1.6.2.1 Test Purpose and Environment

The purpose of this test is to verify that when V2X sidelink is in SL-DRX and NR PCell is in non-DRX, NR PCell interruptions due to transitions of V2X sidelink UE from active to non-active and from non-active to active do not exceed the limits in terms of missing ACK/NACK. This test will verify the missing ACK/NACK rate on NR PCell in clause 12.7.4 under the following additional conditions:

- The UE is out of coverage on the V2X sidelink carrier and is associated with a serving cell on a non-V2X sidelink carrier.

- The UE is in sidelink resource allocation mode 1.

This test is applicable for V2X sidelink communication capable UEs that support inter-band concurrent V2X sidelink operation.

For this test, the UE is triggered by the test loop function or the upper layers to monitor V2X sidelink communication.

The test parameters are given in Table A.9.1.6.2.1-1, Table A.9.1.6.2.1-2, and Table A.9.1.6.2.1-3. The test consists of one active cell (PCell) on the serving RF channel 1, and there are no active cells on RF channel 2. The UE under test selects GNSS as the synchonization source.

The test consists of one time period, with duration of T1. During T1, NR PCell is continuously scheduled in DL while V2X sidelink is not scheduled and has SL-DRX configured. Prior to start of T1 the SL-DRX inactivity timer for the V2X sidelink has already expired. PDCCH indicating a new transmission on PCell shall be sent continuously during the entire time duration to ensure UE would not enter DRX state on PCell.

Table A.9.1.6.2.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	NR Uu: FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NR Uu: TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
3	NR Uu: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.9.1.6.2.1-2: Test Parameters for Interruptions at transitions between active and non-active during SL-DRX in asynchronous case

Parameter	Unit	Value	Comment
RF Channel Number	-	1, 2	RF channel 1 is non-V2X sidelink carrier RF channel 2 is V2X sidelink carrier
SCS	kHz	30	
Active cell	-	Cell 1	PCell on RF channel number 1
CP length of Cell 1	-	Normal	
SL-DRX		SL-DRX.3	SL-DRX related parameters are defined in Table A.3.21.4.2-1
T1	s	10	

Table A.9.1.6.2.1-3: Cell specific test parameters for interruptions at transitions between active and non-active during SL-DRX in asynchronous case

Parameter		Unit	Cell 1
			T1
RF Channel Number			1
UE RRC state			CONNECTED
Duplex Mode	Config 1		FDD
	Config 2,3		TDD
TDD configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
Channel Bandwidth ($BW_{channel}$)	Config 1,2	MHz	10: $N_{RB,c}$ = 52
	Config 3		40: $N_{RB,c}$ = 106
Initial BWP Configuration			DLBWP.0.1 ULBWP.0.1

Dedicated BWP Configuration			DLBWP.1.1 ULBWP.1.1
DRX Cycle			N/A
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD
	Config 2		SR.1.1 TDD
	Config 3		SR.2.1 TDD
CORESET Reference Channel	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
SSB configuration	Config 1,2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTC Configuration			SMTC.2
OCNG Patterns			OP.1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note2	Config 1,2,3	dBm/15 kHz	-98
N_{oc} Note2	Config 1,2	dBm/SCS	-98
	Config 3		-95
$\hat{E}_s / N_{oc}$		dB	3
SS-RSRP Note3	Config 1,2	dBm/SCS	-95
	Config 3		-92
Io Note 3	Config 1,2	dBm/9.36 MHz	-65.3
	Config 3	dBm/38.1 MHz	-59.2
Antenna Configuration			1x2
Propagation Condition			AWGN

Note 1: OCNG shall be used such that cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.9.1.6.2.2 Test Requirements

The UE shall be continuously scheduled on PCell on RF channel 1 during the entire length of T1. UE shall not be scheduled in V2X sidelink during T1. During the time duration T1 the UE shall transmit at least 99.375% of ACK/NACK on NR PCell.

Interruption on NR PCell shall not exceed X as defined in Table A.9.1.6.2.2-1.

Table A.9.1.6.2.2-1: Interruption length X at transition between active and non-active during SL-DRX

μ	NR Slot length (ms)	Interruption length X
		Async
0	1	2
1	0.5	2
2	0.25	3

The rate of correct events observed during repeated tests shall be at least 90%.

A.9.1.6.3 Test for Interruption at NR Sidelink Diccovery Configuration

A.9.1.6.3.1 Test Purpose and Environment

The purpose of this test is to verify the requirements related to interruptions due to NR sidelink discovery configuration defined in clause 12.7.8 under the following additional conditions:

- The UE is out of coverage on the NR sidelink carrier and is associated with a serving cell on a NR non-sidelink carrier

This test is applicable for NR sidelink discovery capable UEs that support inter-band concurrent sidelink operation.

For this test, the UE is triggered by the test loop function or the upper layers to monitor NR sidelink discovery.

The test parameters are given in Table A.9.1.6.3.1-1, Table A.9.1.6.3.1-2, Table A.9.1.6.3.1-3 and Table A.9.1.6.3.1-4. The test consists of one active cell (PCell) on the serving RF channel 1, and there are no active cells on RF channel 2. On RF channel 2, the test consists of 8 active Sidelink UEs in this test transmitting sidelink discovery. The UE under test and all active sidelink UEs select the active cell as synchonization source.

The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively.

During T1, the UE is in RRC_IDLE and monitoring NR sidelink discovery announcements from other active Sidelink UEs on NR sidelink discovery resources.

During T2, the test system establishes a RRC connection with the UE. No PDSCH traffic is scheduled for UE, and the UE is expected to transmit *SidelinkUEInformationNR* indicating *sl-RxInterestedFreqListDisc*. On reception of *SidelinkUEInformationNR*, the test system shall send RRC reconfiguration message to the UE and wait for the UE to respond with RRC reconfiguration complete message before transitioning to T3. If the UE does not transmit *SidelinkUEInformationNR* for up to 2 second, the test system shall transition to T3.

During T3, the UE is scheduled with PDSCH traffic on PCell downlink. The test system will count the missed ACK/NACKs during T3 to verify the allowed interruptions during NR sidelink discovery.

Table A.9.1.6.3.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	NR Uu: FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NR Uu: TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
3	NR Uu: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.9.1.6.3.1-2: Test Parameters for Interruptions at NR Sidelink Discovery Configuration

Parameter	Unit	Value	Comment

RF Channel Number	-	1, 2	RF channel 1 is NR non-sidelink carrier RF channel 2 is NR sidelink carrier
SCS	kHz	30	
Active cell	-	Cell 1	PCell on RF channel number 1
CP length of Cell 1	-	Normal	
T1	s	5.12	
T2	s	Up to receiving RRC reconfiguration setup complete from the UE, or up to 2 second if UE does not transmit *SidelinkUEInformationNR* during this period.	
T3	s	5	

Table A.9.1.6.3.1-3: Sidelink Discovery Configuration for Interruptions at NR Sidelink Discovery Configuration

Parameter		Unit	Value	Comment
RF Channel Number		-	2	HD carrier in Band n47 or n38
Channel Bandwidth ($BW_{channel}$) Note 1		MHz	20 ($N_{RB,c}$ = 50) or 40 ($N_{RB,c}$ = 100)	
NR sidelink discovery configuration		-	As specified in section A.3.X1.2	IE values unless specified otherwise in this test.
Number of Active Sidelink UEs		-	8	Active Sidelink UE i = 0, .., 7
Active Sidelink UEs (UE i = 0, .., 7)	NR sidelink discovery configuration	-	As specified in section A.3.X1.2	IE values unless specified otherwise in this test.
	PSCCH Reference Measurement Channel	-	CC.1A HD	As specified in Table A.3.21.3-1
	PSSCH Reference Measurement Channel	-	CD.1A HD	As specified in Table A.3.21.3-2
	sl-NumSubchannel-r16 included in SL-ResourcePool	-	1	Indicates the number of sub-channels for TX resource pool
	sl-StartRB-Subchannel-r16 included in SL-ResourcePool	-	i	Indicates the lowest RB index of the subchannel with the lowest index for active Sidelink UE i = 0, .., 7.
	PSBCH-RSRP	dBm/30kHz	-95	
Note 1: The UE is only required to be tested in one of the supported test configurations.				

Table A.9.1.6.3.1-4: Cell specific test parameters for interruptions at NR Sidelink Discovery Configuration

Parameter		Unit	Cell 1		
			T1	T2	T3
RF Channel Number			1		
UE RRC state			IDLE	CONNECTED	
Duplex Mode	Config 1		FDD		
	Config 2,3		TDD		
TDD configuration	Config 1		Not Applicable		
	Config 2		TDDConf.1.1		
	Config 3		TDDConf.2.1		
	Config 1,2	MHz	10: $N_{RB,c}$ = 52		

Channel Bandwidth ($BW_{channel}$)	Config 3		40: $N_{RB,c}$ = 106		
Initial BWP Configuration			DLBWP.0.1 ULBWP.0.1		
Dedicated BWP Configuration			DLBWP.1.1 ULBWP.1.1		
DRX Cycle			N/A		
PDSCH Reference measurement channel	Config 1		N/A	None	SR.1.1 FDD
	Config 2		N/A	None	SR.1.1 TDD
	Config 3		N/A	None	SR.2.1 TDD
CORESET Reference Channel	Config 1		CR.1.1 FDD		
	Config 2		CR.1.1 TDD		
	Config 3		CR.2.1 TDD		
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD		
	Config 2		CCR.1.1 TDD		
	Config 3		CCR.2.1 TDD		
SSB configuration	Config 1,2		SSB.1 FR1		
	Config 3		SSB.2 FR1		
SMTC Configuration			SMTC.2		
OCNG Patterns			OP.1		
EPRE ratio of PSS to SSS		dB	0		
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} Note2	Config 1,2,3	dBm/15 kHz	-98		
N_{oc} Note2	Config 1,2	dBm/SCS	-98		
	Config 3		-95		
$\hat{E}_s / N_{oc}$		dB	3		
SS-RSRP Note3	Config 1,2	dBm/SCS	-95		
	Config 3		-92		
Io Note 3	Config 1,2	dBm/9.36 MHz	-65.3		
	Config 3	dBm/38.1 MHz	-59.2		
Antenna Configuration			1x2		
Propagation Condition			AWGN		

Note 1: OCNG shall be used such that cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.9.1.6.3.2 Test Requirements

The UE shall be continuously scheduled on PCell on RF channel 1 during T3. During T3, the interruption on PCell shall not be more than the values specified in clause 12.7.8.

A.9.1.7 Selection / Reselection of relay UE

A.9.1.7.1 Test Purpose and Environment

The purpose of this test is to verify the requirements related to selection / reselection of relay UE defined in clauses 12.10. In the test the UE under test is configured with PCell and is configured with resource pools for NR sidelink discovery message as required for remote UE operation.

This test is applicable to UEs capable of NR sidelink communication and sidelink discovery, and further support the optional feature of sidelink remote UE operation.

The test parameters are given in Table A.9.1.71.1-1, Table A.9.1.7.1-2, Table A.9.1.7.1-3, Table A.9.1.7.1-4, and Table A.9.1.7.1-5 below. The test consists of one active serving cell (cell 1), one remote UE and two active Sidelink relay UEs (Sidelink Relay UE 1, Sidelink Relay UE 2). The relay UEs are configured in mode 2 to be transmitting relay discovery messages every discovery period, which is determined by resource reservation period indicated by sl-ResourceReservePeriodList.

The test system shall ensure that the remote UE under test has transmitted *SidelinkUEInformationNR* message and has been configured with the sidelink discovery resource pool and sidelink communication resource pool respectively for relay operation prior to the start of the test.

The tests consist of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively.

During T1, RSRP of cell 1 is kept higher than *threshHighRemote* (within *sl-remoteUE-Config*), and the remote UE is not required to perform relay UE selection.

During T2, RSRP of cell 1 is configured to be lower than *threshHighRemote.* The UE is expected to start looking for relay UE. The test system shall ensure that the UE under test has been configured the resource pool prior to end of T2 duration. During T2, the SD-RSRP of Sidelink Relay UE 1 and Sidelink Relay UE 2 is configured to be lower than the detection threshold and no relay UE will be available for the remote UE under test.

During T3, the SD-RSRP of Sidelink Relay UE 1 is raised above the threshold *sl-RSRP-Thresh* and the UE is expected to perform relay selection to Sidelink Relay UE 1. The test system can determine that the remote UE has selected a relay by monitoring the configured sidelink communication resource for the Prose direct link establishment request message to the relay UE.

During T4, the UE is expected to complete the sidelink connection establishment with the relay UE. Note that the RSRP of the serving cell (cell 1) and the SD-RSRP of sidelink relay UEs is kept unchanged during T3 and T4. The period T4 ends when Sidelink Relay UE1 sends the sidelink communication response message back to the remote UE.

During T5, SD-RSRP of Sidelink Relay UEs are modified such that the remote UE is expected to reselect to Sidelink Relay UE2.

Table A.9.1.7.1-1: Test parameters for selection / reselection of relay UE test for NR FR1

Parameter	Unit	Value	Comment
NR RF Channel Number		1	HD carrier in Band n47 or n38
Channel Bandwidth ($BW_{channel}$) Note 1	MHz	20 (NRB,c = 50) or 40 (NRB,c = 100)	
SCS	kHz	30	
Active cell		Cell 1	Serving NR cell will broadcasting SIB12
Active Relay UEs		Relay UE 1, Relay UE 2	Transmitting relay discovery message
CP length of Cell 1		Normal	
T1	ms	100	
T2	s	Up to receiving RRC reconfiguration setup complete from the UE, or up to [1] sec if UE	

		does not transmit *SidelinkUEInformationNR* during this period.	
T3	s	1	
T4	s	2	
T5	s	1	
Note 1: The UE is only required to be tested in one of the supported test configurations.			

Table A.9.1.7.1-2: Sidelink discovery configuration for selection / reselection of relay UE test for NR FR1

Parameter	Unit	Value	Comment
NR RF Channel Number		1	HD carrier in Band n47 or n38
Channel Bandwidth ($BW_{channel}$) Note 1	MHz	20 ($N_{RB,c}$ = 50) or 40 ($N_{RB,c}$ = 100)	
Resource pool configuration for sidelink discovery		As specified in Table A.3.21.2-2 Note 2	IE values unless specified otherwise in this test.
sl-TimeResource included in *sl-DiscTxPoolSelected-r17* and *sl-DiscRxPool-r17*		0000111100	Indicates the bitmap of the TX and Rx resource pool, which is defined by repeating the bitmap within a SFN cycle (see TS 38.213[3])
sl-NumSubchannel included in *sl-DiscTxPoolSelected-r17* and *sl-DiscRxPool-r17*		2	Indicates the number of sub-channels for TX resource pool
sl-SubchannelSize included in *sl-DiscTxPoolSelected-r17* and *sl-DiscRxPool-r17*		10	Indicates the minimum granularity in frequency domain for the sensing for PSSCH resource selection in the unit of PRB
sl-ResourceReservePeriodList	s	0.04	Indicates the resource reservation period for discovery period
threshHighRemote within sl-remoteUE-Config		-91dBm	
sl-RSRP-Thresh within sl-remoteUE-Config		-91dBm	
Note 1: The UE is only required to be tested in one of the supported test configurations. Note 2: This test is according to the principle defined in section A.3.21.			

Table A.9.1.7.1-3: Sidelink Communication configuration for selection / reselection of relay UE test

Parameter	Unit	Value	Comment
RF Channel Number	-	1	HD carrier in Band n47 or n38
Channel Bandwidth ($BW_{channel}$) Note 1	MHz	20 ($N_{RB,c}$ = 50) or 40 ($N_{RB,c}$ = 100)	
Sidelink Communication configuration	-	As specified in section A.3.21.2	IE values unless specified otherwise in this test.
sl-TimeResource	-	0000000011	Indicates the bitmap of the TX and Rx resource pool, which is defined by repeating the bitmap within a SFN cycle (see TS 38.213[3])
Number of Active Sidelink Relay UEs	-	2	Active Sidelink UE i = 0, 1

Active Sidelink Relay UEs (UE i = 0, 1)	PSCCH Reference Measurement Channel	-	CC.1A HD	As specified in Table A.3.21.3-1
	PSSCH Reference Measurement Channel	-	CD.1A HD	As specified in Table A.3.21.3-2
	sl-NumSubchannel-r16 included in SL-ResourcePool	-	1	Indicates the number of sub-channels for TX resource pool
	sl-SubchannelSize-r16 included in SL-ResourcePool		10	Indicates the minimum granularity in frequency domain for the sensing for PSSCH resource selection in the unit of PRB
	sl-StartRB-Subchannel-r16 included in SL-ResourcePool	-	floor(i)x10	Indicates the lowest RB index of the subchannel with the lowest index for Sidelink Relay UE i = 0 starts RB=0; Sidelink Relay UE i = 1 starts RB=10.
	PSBCH-RSRP	dBm/30kHz	-95	
Note 1: The UE is only required to be tested in one of the supported test configurations.				

Table A.9.1.7.1-4: Sidelink Relay UE specific test parameters for selection / reselection of relay UE test for NR FR1

Parameter	Unit	Relay UE 1					Relay UE 2				
		T1	T2	T3	T4	T5	T1	T2	T3	T4	T5
NR RF Channel Number		1 (HD carrier in Band n47 or n38)									
$BW_{channel}$ Note 4	MHz	20 ($N_{RB,c}$ = 50) or 40 ($N_{RB,c}$ = 100)									
SCS	kHz	30									
Sidelink Discovery resource pool configuration		As specified in Table A.9.1.7.1-2									
Transmission frequency		Every discovery period (40ms)									
Resource allocation		Non-overlapping PRBs									
N_{oc} Note1	dBm/30 kHz	-97									
$\hat{E}_s / N_{oc}$	dB	-inf	-inf	10.5	10.5	-1.5	-inf	-inf	-inf	-inf	10.5
SD-RSRP / SL-RSRP Note2, Note 3	dBm/30 kHz	-inf	-inf	-86.5	-86.5	-98.5	-inf	-inf	-inf	-inf	-86.5
Antenna Configuration	-	1x2									
Propagation Condition		AWGN									

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SD-RSRP / SL-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: PSCCH-DMRS Es/Iot is set the same as PSSCH-DMRS Es/Iot.
Note 4: This test is according to the principle defined in section A.3.21.2.

Table A.9.1.7.1-5: Cell specific test parameters for selection / reselection of relay UE test for NR FR1

Parameter	Unit	Cell1				
		T1	T2	T3	T4	T5

NR RF Channel Number			2				
Serving/Non-serving			Serving				
Duplex Mode	Config 1		FDD				
	Config 2,3		TDD				
TDD configuration	Config 1		Not Applicable				
	Config 2		TDDConf.1.1				
	Config 3		TDDConf.2.1				
Channel Bandwidth ($BW_{channel}$)	Config 1,2		10: $N_{RB,c}$ = 52				
	Config 3		40: $N_{RB,c}$ = 106				
Initial BWP Configuration			DLBWP.0.1 ULBWP.0.1				
Dedicated BWP Configuration			DLBWP.1.1 ULBWP.1.1				
DRX Cycle			N/A				
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD				
	Config 2		SR.1.1 TDD				
	Config 3		SR.2.1 TDD				
CORESET Reference Channel	Config 1		CR.1.1 FDD				
	Config 2		CR.1.1 TDD				
	Config 3		CR.2.1 TDD				
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD				
	Config 2		CCR.1.1 TDD				
	Config 3		CCR.2.1 TDD				
SSB configuration	Config 1,2		SSB.1 FR1				
	Config 3		SSB.2 FR1				
SMTC Configuration			SMTC.2				
OCNG Patterns			OP.1				
EPRE ratio of PSS to SSS		dB	0				
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
Correlation Matrix and Antenna Configuration			1x2 Low				
drx-Configuration			N/A				
PDCCH/PCFICH/PHICH Reference measurement channel[Note1]			R.11 FDD				
OCNG Pattern defined in A.3.2.1			OP.16 FDD				
N_{oc} [Note2]	Config 1,2,3	dBm/15 kHz	-97				
N_{oc} [Note2]	Config 1,2,	dBm/SCS	-97				
	Config 3		-94				
$\hat{E}_s / N_{oc}$		dB	10.5	1.5	1.5	1.5	1.5
RSRP [Note3]		dBm/15 kHz	-86.5	-95.5	-95.5	-95.5	-95.5
Propagation condition			AWGN				
Correlation Matrix and Antenna Configuration			1x2 Low				

Note 1: OCNG shall be used such that cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.9.1.7.2 Test Requirements

Sidelink relay UE selection delay is defined as the time from the beginning of time period T3 to the moment when the UE selects the Sidelink Relay UE1 and transmits the PC5-SP direct communication setup message using Sidelink Communications.

The test system shall verify that the sidelink relay UE selection delay is less than 680ms.

NOTE: The sidelink relay UE selection delay can be expressed as ($T_{evaluate, ProSe_Relay_intra}$ + 40ms).

Sidelink relay UE reselection time is defined as the time from the beginning of time period T5 to the moment when the UE reselects to Sidelink relay UE2 and transmits the direct communication setup message using Sidelink Communications.

The test system shall verify that the sidelink relay UE reselection delay is less than 840ms.

NOTE: The sidelink relay UE reselection delay can be expressed as ($T_{measure,ProSe_Relay_Intra}$ + $T_{evaluate, ProSe_Relay_intra}$ + 40ms).

A.10 EN-DC Tests with NR PSCell under CCA and Other NR Cells in FR1

Editor's note: Test cases for EN-DC with NR PSCell under CCA and SCell under CCA are also included here.

A.10.1 RRC_CONNECTED state mobility

A.10.1.1 RRC connection mobility control

A.10.1.1.1 Random Access

A.10.1.1.1.1 4-step RA type contention-based random access for NR PSCell with CCA

A.10.1.1.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits when subject to CCA. This test will verify the requirements in clause 6.2.2A.2 and clause 7.1.2 in an AWGN model.

For this test two cells are used, with the configuration of Cell 1 (E-UTRA PCell) specified in clause A.3.7A.2.1 and Cell 2 configured as PSCell in FR1. Cell 1 is on a licensed band and cell 2 is subjected to CCA. Supported test parameters are shown in Table A.10.1.1.1.1.1-1. UE capable of EN-DC with PSCell in FR1 needs to be tested by using the parameters in Table A.10.1.1.1.1.1-2.

Table A.10.1.1.1.1.1-1: Supported test configurations for contention based random access test in FR1 for PSCell with CCA

Config	Description
1	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations depending on UE capability	

Table A.10.1.1.1.1.1-2: General test parameters for contention based random access test in FR1 for PSCell with CCA

Parameter			Unit	Test-1	Comments
SSB Configuration	Note 4, 6	Config 1,2		SSB.1 CCA	As defined in A.3.10A
	Note 5, 6	Config 1,2		SSB.2 CCA	As defined in A.3.10A
DBT Window Configuration		Config 1,2		DBT.1	As specified in A.3.28.1
DL CCA model		Config 1,2		As specified in A.3.26.2.1	
UL CCA model		Config 1,2		As specified in A.3.26.2.2	
Duplex Mode for Cell 2		Config 1,2		TDD	
TDD Configuration		Config 1,2		TDDConf.1.1 CCA	
OCNG Pattern Note 1				OCNG pattern 1	As defined in A.3.2.1.
PDSCH parameters Note 3		Config 1,2		SR.1.1 CCA	As defined in A.3.1A.1.
NR RF Channel Number				1	
EPRE ratio of PSS to SSS			dB		
EPRE ratio of PBCH_DMRS to SSS			dB		
EPRE ratio of PBCH to PBCH_DMRS			dB		

EPRE ratio of PDCCH_DMRS to SSS			dB	0	
EPRE ratio of PDCCH to PDCCH_DMRS			dB		
EPRE ratio of PDSCH_DMRS to SSS			dB		
EPRE ratio of PDSCH to PDSCH_DMRS			dB		
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	Power of SSB with index 0 is set to be above configured *rsrp-ThresholdSSB*
	N_{oc}	Config 1,2	dBm/15kHz	-101	
	$\hat{E}_s / N_{oc}$		dB	3	
	SS-RSRP		dBm/ SCS	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured *rsrp-ThresholdSSB*
	N_{oc}	Config 1,2	dBm/15kHz	-101	
	$\hat{E}_s / N_{oc}$		dB	-17	
	SS-RSRP		dBm/ SCS	-115	
Io Note 2		Config 1,2	dBm	-62.2/38.16MHz	For symbols without SSB index 1
ss-PBCH-BlockPower			dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [2].
Configured UE transmitted power ($P_{CMAX,\ f,c}$)			dBm	23	As defined in clause 6.2.4 in TS 38.101-1.
PRACH Configuration				FR1 PRACH configuration 1 under CCA	As defined in A.3.8A.2.
DL CCA probability		Note 4, 6		0.9375	
P_{CCA_DL}		Note 5, 6		0.75/0.75	
L_{CCA_DL} Note 7				4	
W_{CCA_DL} Note 8				Inf	
UL CCA probability		Note 4, 6		0.87	
P_{CCA_UL}		Note 5, 6		0.75	
L_{CCA_UL} Note 7				5	
W_{CCA_UL} Note 8				Inf	
Semi-static channel access config period Note 4, 6			ms	2	
Propagation Condition			-	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.
Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.
Note 3: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.
Note 4: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 5: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2}.
Note 6: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic channel occupancy and semi-static channel occupancy configuration.
Note 7: L_{CCA_DL} and L_{CCA_UL} are chosen such that preambleTransMax > 5 + L_{CCA_DL} + L_{CCA_UL}.
Note 8: A window W_{CCA_DL}=W_{CCA_UL}=Inf is used to indicate that L_{CCA_DL} and L_{CCA_UL} are considered during the entire duration of a test run.

A.10.1.1.1.1.2 Test Requirements

Contention based random access is triggered by *not* explicitly assigning a random access preamble via dedicated signalling in the downlink.

A.10.1.1.1.1.2.1 Random Access Preamble Transmission

To test the UE behavior specified in Clause 6.2.2A.2.1.1 the System Simulator shall receive the Random Access Preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SS-RSRP above the configured *rsrp-ThresholdSSB*, if the UL CCA is successful.

The three requirements below are relevant for all cases of PRACH transmissions described within the whole clause A.10.1.1.1.1.2:

- The System Simulator shall implement the UL CCA model of A.3.26.2 for the RACH occasions where PRACH transmissions are expected. The System Simulator shall monitor the RACH occasions to detect if the UE is transmitting PRACH preambles. If a PRACH transmission is detected on a RACH occasion that is expected to have UL CCA failure, the test is considered as failed.

- In case of CCA DL failure, the test equipment should verify that the UE does not transmit PRACH for semi-static channel access mode; for dynamic channel access mode it is assumed that RACH occasions are always scheduled within a UE-initiated COT.

- In case of UL CCA failure, The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS38.321 [7], and transmit with the calculated PRACH transmission power.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2A.2. The power of the first preamble shall be -16 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.10.1.1.1.1.2.2 Random Access Response Reception

To test the UE behavior specified in Clause 6.2.2A.2.1.2 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a Random Access Response *not* corresponding to the transmitted Random Access Preamble. In case of CCA DL failure, the test equipment should delay the transmission of Random Access Response.

The UE may stop monitoring for Random Access Response(s) and shall transmit the msg3 if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble if UL CCA is successful. The System Simulator shall monitor if the UE is transmitting msg3 when CCA UL failure. If a msg3 transmission is detected on a grant expected to have UL CCA failure, the test is considered as failed.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2A.2. The power of the first preamble shall be -16 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.10.1.1.1.1.2.3 No Random Access Response Reception

To test the UE behavior specified in clause 6.2.2A.2.1.3 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles. In case of CCA DL failure, the test equipment should delay the transmission of Random Access Response.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2A.2. The power of the first preamble shall be -16 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.10.1.1.1.1.2.4 Receiving an UL grant for msg3 retransmission

To test the UE behavior specified in clause 6.2.2A.2.1.4, the System Simulator shall provide an UL grant for msg3 retransmission following a successful Random Access Response if UL CCA is successful. The System Simulator shall monitor if the UE is transmitting msg3 when CCA UL failure. If a msg3 is detected on a grant expected to have UL CCA failure, the test is considered as failed.

The UE shall re-transmit the msg3 upon the reception of an UL grant for msg3 retransmission.

A.10.1.1.1.1.2.5 Contention Resolution Timer expiry

To test the UE behavior specified in Clause 6.2.2A.2.1.6 the System Simulator shall *not* send a response to a msg3.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if the Contention Resolution Timer expires.

A.10.1.1.1.2 4-step RA type non-contention based random access for NR PSCell with CCA

A.10.1.1.1.2.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits when subject to CCA. This test will verify the requirements in clause 6.2.2A.2 and clause 7.1.2 in an AWGN model.

For this test two cells are used, with the configuration of Cell 1 (E-UTRA PCell) specified in clause A.3.7A.2.1 and Cell 2 configured as PSCell in FR1. Cell 1 is on a licensed band and cell 2 is subjected to CCA. Supported test parameters are shown in Table A.10.1.1.1.2.1-1. UE capable of EN-DC with PSCell in FR1 needs to be tested by using the parameters in Table A.10.1.1.1.2.1-2.

Table A.10.1.1.1.2.1-1: Supported test configurations for non-contention based random access test in FR1 for PSCell with CCA

Config	Description
1	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations depending on UE capability	

Table A.10.1.1.1.2.1-2: General test parameters for non-contention based random access test in FR1 for PSCell with CCA

Parameter			Unit	Test-1	Comments
SSB Configuration	Note 4, 6	Config 1,2		SSB.1 CCA	As defined in A.3.10A
	Note 5, 6	Config 1,2		SSB.2 CCA	As defined in A.3.10A
DBT Window Configuration		Config 1,2		DBT.1	As specified in A.3.28.1
DL CCA model		Config 1,2		As specified in A.3.26.2.1	
UL CCA model		Config 1,2		As specified in A.3.26.2.2	
Duplex Mode for Cell 2		Config 1,2		TDD	
TDD Configuration		Config 1,2		TDDConf.1.1 CCA	
OCNG Pattern Note 1				OCNG pattern 1	As defined in A.3.2.1.
PDSCH parameters Note 3		Config 1,2		SR.1.1 CCA	As defined in A.3.1A.1.
NR RF Channel Number				1	
EPRE ratio of PSS to SSS			dB	0	
EPRE ratio of PBCH_DMRS to SSS			dB		
EPRE ratio of PBCH to PBCH_DMRS			dB		
EPRE ratio of PDCCH_DMRS to SSS			dB		
EPRE ratio of PDCCH to PDCCH_DMRS			dB		
EPRE ratio of PDSCH_DMRS to SSS			dB		
EPRE ratio of PDSCH to PDSCH_DMRS			dB		
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	Power of SSB with index 0 is set to be above configured *rsrp-ThresholdSSB*
	N_{oc}	Config 1,2	dBm/15kHz	-101	
	$\hat{E}_s / N_{oc}$		dB	3	
	SS-RSRP		dBm/ SCS	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured *rsrp-ThresholdSSB*
	N_{oc}	Config 1,2	dBm/15kHz	-101	
	$\hat{E}_s / N_{oc}$		dB	-17	
	SS-RSRP		dBm/ SCS	-115	
Io Note 2		Config 1,2	dBm	-62.2/38.16MHz	For symbols without SSB index 1
ss-PBCH-BlockPower			dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [2].
Configured UE transmitted power ($P_{\mathrm{CMAX},\ f,c}$)			dBm	23	As defined in clause 6.2.4 in TS 38.101-1.
PRACH Configuration				FR1 PRACH configuration 2 under CCA	As defined in A.3.8A.2.
DL CCA probability P_{CCA_DL}	Note 4, 6			0.9375	
	Note 5, 6			0.75/0.75	

L_{CCA_DL} Note 7			4	
W_{CCA_DL} Note 8			Inf	
UL CCA probability	Note 4, 6		0.87	
P_{CCA_UL}	Note 5, 6		0.75	
L_{CCA_UL} Note 7			5	
W_{CCA_UL} Note 8			Inf	
Semi-static channel access config period Note 4, 6		ms	2	
Propagation Condition		-	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.
Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.
Note 3: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.
Note 4: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 5: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2}.
Note 6: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic channel occupancy and semi-static channel occupancy configuration.
Note 7: L_{CCA_DL} and L_{CCA_UL} are chosen such that preambleTransMax > 5 + L_{CCA_DL} + L_{CCA_UL}.
Note 8: A window W_{CCA_DL}=W_{CCA_UL}=Inf is used to indicate that L_{CCA_DL} and L_{CCA_UL} are considered during the entire duration of a test run.

A.10.1.1.1.2.2 Test Requirements

Non-Contention based random access is triggered by explicitly assigning a random access preamble via dedicated signalling in the downlink. In the test, the non-contention based random access procedure is not initialized for Other SI requested from UE or beam failure recovery.

A.10.1.1.1.2.2.1 SSB-based Random Access Preamble Transmission

In Test-1, to test the UE behavior specified in Clause 6.2.2A.2.2.1 for SSB-based Random Access Preamble transmission, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs configured, the System Simulator shall receive the Random Access Preamble which has the Preamble Index associated with the SSB with index 0.

The three requirements below are relevant for all cases of PRACH transmissions described within the whole clause A.10.1.1.1.2.2:

- The System Simulator shall implement the UL CCA model of A.3.26.2 for the RACH occasions where PRACH transmissions are expected. The System Simulator shall monitor the RACH occasions to detect if the UE is transmitting PRACH preambles. If a PRACH transmission is detected on a RACH occasion that is expected to have UL CCA failure, the test is considered as failed.

- In case of CCA DL failure, the test equipment should verify that the UE does not transmit PRACH for semi-static channel access mode; for dynamic channel access mode it is assumed that RACH occasions are always scheduled within a UE-initiated COT.

- In case of UL CCA failure, The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS38.321 [7], and transmit with the calculated PRACH transmission power.

In addition, the System Simulator shall receive the Random Access Preamble on the PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0, and the selected PRACH occasion shall belong to the PRACH occasions permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2A.2. The power of the first preamble shall be -16 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.10.1.1.1.2.2.2 Random Access Response Reception

To test the UE behavior specified in Clause 6.2.2A.2.2.2 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a Random Access Response *not* corresponding to the transmitted Random Access Preamble. In case of CCA DL failure, the test equipment should delay the transmission of Random Access Response.

The UE may stop monitoring for Random Access Response(s) if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble if UL CCA is successful. The System Simulator shall monitor if the UE is transmitting msg3 when CCA UL failure. If a msg3 is detected on a grant expected to have UL CCA failure, the test is considered as failed.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS38.321 [7], and transmit with the calculated PRACH transmission power if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2A.2. The power of the first preamble shall be -16 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.10.1.1.1.2.2.3 No Random Access Response Reception

To test the UE behavior specified in clause 6.2.2A.2.2.3 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles. In case of CCA DL failure, the test equipment should delay the transmission of Random Access Response.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window configured in *RACH-ConfigCommon*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2A.2. The power of the first preamble shall be -16 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.10.1.1.1.3 2-step RA type contention-based random access for NR PSCell with CCA

A.10.1.1.1.3.1 Test Purpose and Environment

The purpose of this test is to verify that the behaviour of the random access procedure is according to the requirements and that the MsgA PRACH, MsgA PUSCH power settings and timing are within specified limits when subject to CCA. This test will verify the requirements in clause 6.2.2A.3 and clause 7.1.2 in an AWGN model.

For this test two cells are used, with the configuration of Cell 1 (E-UTRA PCell) specified in clause A.3.7A.2.1 and Cell 2 configured as PSCell in FR1. Cell 1 is on a licensed band and cell 2 is subjected to CCA. Supported test parameters are shown in Table A.10.1.1.1.3.1-1. UE capable of EN-DC with PSCell in FR1 needs to be tested by using the parameters in Table A.10.1.1.1.3.1-2.

Table A.10.1.1.1.3.1-1: Supported test configurations for 2-step RA type contention based random access test in FR1 for PSCell with CCA

Config	Description
1	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations depending on UE capability	

Table A.10.1.1.1.3.1-2: General test parameters for 2-step RA type contention based random access test in FR1 for PSCell with CCA

Parameter			Unit	Test-1	Comments
SSB Configuration	Note 4, 6	Config 1,2		SSB.1 CCA	As defined in A.3.10A
	Note 5, 6	Config 1,2		SSB.2 CCA	As defined in A.3.10A
DBT Window Configuration		Config 1,2		DBT.1	As specified in A.3.28.1
DL CCA model		Config 1,2		As specified in A.3.26.2.1	
UL CCA model		Config 1,2		As specified in A.3.26.2.2	
Duplex Mode for Cell 2		Config 1,2		TDD	
TDD Configuration		Config 3,4		TDDConf.1.1 CCA	
OCNG Pattern Note 1				OCNG pattern 1	As defined in A.3.2.1.
PDSCH parameters Note 3		Config 1,2		SR.1.1 CCA	As defined in A.3.1A.1.
NR RF Channel Number				1	
EPRE ratio of PSS to SSS			dB	0	
EPRE ratio of PBCH_DMRS to SSS			dB		
EPRE ratio of PBCH to PBCH_DMRS			dB		
EPRE ratio of PDCCH_DMRS to SSS			dB		
EPRE ratio of PDCCH to PDCCH_DMRS			dB		
EPRE ratio of PDSCH_DMRS to SSS			dB		
EPRE ratio of PDSCH to PDSCH_DMRS			dB		
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	Power of SSB with index 0 is set to be above configured *msgA-RSRP-ThresholdSSB*
	N_{oc}	Config 1,2	dBm/15kHz	-101	
	$\hat{E}_s / N_{oc}$		dB	3	
	SS-RSRP Note 2		dBm/ SCS	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below

				configured *msgA-RSRP-ThresholdSSB*
	N_{oc}	Config 1,2	dBm/15kHz	-101
	$\hat{E}_s / N_{oc}$		dB	-17
	SS-RSRP Note 2		dBm/ SCS	-115
Io		Config 1,2	dBm	-62.2/38.16MHz	For symbols without SSB index 1
ss-PBCH-BlockPower			dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [2].
Configured UE transmitted power ($P_{CMAX,\ f,c}$)			dBm	23	As defined in clause 6.2.4 in TS 38.101-1.
MsgA Configuration				FR1 MsgA configuration 1 under CCA	As defined in A.3.20A.2.
msgA-RSRP-ThresholdSSB			dBm	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [2].
DL CCA probability		Note 4, 6		0.9375	
P_{CCA_DL}		Note 5, 6		0.75/0.75	
L_{CCA_DL} Note 7				4	
W_{CCA_DL} Note 8				Inf	
UL CCA probability		Note 4, 6		0.87	
P_{CCA_UL}		Note 5, 6		0.75	
L_{CCA_UL} Note 7				5	
W_{CCA_UL} Note 8				Inf	
Semi-static channel access config period Note 4, 6			ms	2	
Propagation Condition			-	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.
Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.
Note 3: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.
Note 4: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 5: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2}.
Note 6: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic channel occupancy and semi-static channel occupancy configuration.
Note 7: L_{CCA_DL} and L_{CCA_UL} are chosen such that preambleTransMax > 5 + L_{CCA_DL} + L_{CCA_UL}.
Note 8: A window W_{CCA_DL}=W_{CCA_UL}=Inf is used to indicate that L_{CCA_DL} and L_{CCA_UL} are considered during the entire duration of a test run.

A.10.1.1.1.3.2 Test Requirements

Contention based random access is triggered by *not* explicitly assigning a random access preamble via dedicated signalling in the downlink.

A.10.1.1.1.3.2.1 MsgA Transmission

To test the UE behaviour specified in Clause 6.2.2A.3.1.1 the System Simulator shall receive the MsgA with a preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SS-RSRP above the configured *msgA-RSRP-ThresholdSSB*, if the UL CCA is successful.

below are relevant for all cases of MsgA transmissions described within the clause A.10.1.1.1.3.2:

- The System Simulator shall implement the UL CCA model for the MsgA occasions (i.e. both MsgA PRACH and MsgA PUSCH occasions) where MsgA transmissions are expected. The System Simulator

shall monitor the MsgA occasions to detect if the UE is transmitting MsgA. If a MsgA transmission is detected on MsgA occasions that are expected to have UL CCA failure, the test is considered as failed.

- In case of CCA DL failure, the test equipment should verify that the UE does not transmit MsgA for semi-static channel access mode; for dynamic channel access mode it is assumed that MsgA occasions are always scheduled within a UE-initiated COT.

- The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS38.321 [7], and transmit with the calculated PRACH transmission power in case of UL CCA failure.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS38.321 [7], and transmit with the calculated PRACH transmission power in case of UL CCA failure. In addition, the power applied to all MsgA transmission shall be in accordance with what is specified in Clause 6.2.2A.2. The power of the first MsgA preamble shall be -16 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.10.1.1.1.3.2.2 MsgB Reception

To test the UE behaviour specified in Clause 6.2.2A.3.1.2 the System Simulator shall transmit a MsgB with fallbackRAR containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a MsgB *not* corresponding to the transmitted Random Access Preamble. In case of CCA DL failure, the test equipment should delay the transmission of MsgB.

The UE may stop monitoring for MsgB(s) and shall transmit the msg3 if the MsgB with a fallbackRAR contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble if UL CCA is successful. The System Simulator shall monitor if the UE is transmitting msg3 when CCA UL failure. If a msg3 is detected on a grant expected to have UL CCA failure, the test is considered as failed.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires if all received MsgB's contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble .

In addition, the power applied to all MsgA transmission shall be in accordance with what is specified in Clause 6.2.2A.2. The power of the first MsgA preamble shall be -16 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.10.1.1.1.3.2.3 No MsgB Reception

To test the UE behavior specified in clause 6.2.2A.3.1.3 the System Simulator shall transmit a MsgB with fallbackRAR containing a successRAR message and a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles. In case of CCA DL failure, the test equipment should delay the transmission of MsgB.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires if no MsgB is received within the MsgB Response window.

In addition, the power applied to all MsgA transmission shall be in accordance with what is specified in Clause 6.2.2A.2. The power of the first MsgA preamble shall be -16 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.10.1.1.1.4 2-step RA type non-contention based random access for NR PSCell with CCA

A.10.1.1.1.4.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the MsgA PRACH, MsgA PUSCH power settings and timing are within specified limits when subject to CCA. This test will verify the requirements in clause 6.2.2A.3 and clause 7.1.2 in an AWGN model.

For this test two cells are used, with the configuration of Cell 1 (E-UTRA PCell) specified in clause A.3.7.2.1 and Cell 2 configured as PSCell in FR1. Cell 1 is on a licensed band and cell 2 is subjected to CCA. Supported test parameters are shown in Table A.10.1.1.1.4.1-1. UE capable of EN-DC with PSCell in FR1 needs to be tested by using the parameters in Table A.10.1.1.1.4.1-2.

Table A.10.1.1.1.4.1-1: Supported test configurations for non-contention based random access test for 2-step RA type in FR1 for PSCell with CCA

Config	Description
1	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations depending on UE capability	

Table A.10.1.1.1.4.1-2: General test parameters for non-contention based random access test for 2-step RA type in FR1 for PSCell with CCA

Parameter			Unit	Test-1	Comments
SSB Configuration	Note 4, 6	Config 1,2		SSB.1 CCA	As defined in A.3.10A
	Note 5, 6	Config 1,2		SSB.2 CCA	As defined in A.3.10A
DBT Window Configuration		Config 1,2		DBT.1	As specified in A.3.28.1
DL CCA model		Config 1,2		As specified in A.3.26.2.1	
UL CCA model		Config 1,2		As specified in A.3.26.2.2	
Duplex Mode for Cell 2		Config 1,2		TDD	
TDD Configuration		Config 1,2		TDDConf.1.1 CCA	
OCNG Pattern Note 1				OCNG pattern 1	As defined in A.3.2.1.
PDSCH parameters Note 3		Config 1,2		SR.1.1 CCA	As defined in A.3.1A.1.
NR RF Channel Number				1	
EPRE ratio of PSS to SSS			dB		
EPRE ratio of PBCH_DMRS to SSS			dB		
EPRE ratio of PBCH to PBCH_DMRS			dB		

EPRE ratio of PDCCH_DMRS to SSS			dB	0	
EPRE ratio of PDCCH to PDCCH_DMRS			dB		
EPRE ratio of PDSCH_DMRS to SSS			dB		
EPRE ratio of PDSCH to PDSCH_DMRS			dB		
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	Power of SSB with index 0 is set to be above configured *msgA-RSRP-ThresholdSSB*
	N_{oc}	Config 1,2	dBm/15kHz	-101	
	$\hat{E}_s / N_{oc}$		dB	3	
	SS-RSRP		dBm/ SCS	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured *msgA-RSRP-ThresholdSSB*
	N_{oc}	Config 1,2	dBm/15kHz	-101	
	$\hat{E}_s / N_{oc}$		dB	-17	
	SS-RSRP		dBm/ SCS	-115	
Io Note 2		Config 1,2	dBm	-62.2/38.16MHz	For symbols without SSB index 1
ss-PBCH-BlockPower			dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [2].
Configured UE transmitted power ($P_{CMAX,f,c}$)			dBm	23	As defined in clause 6.2.4 in TS 38.101-1.
MsgA Configuration				FR1 MsgA configuration 2 under CCA	As defined in A.3.20A.2.
msgA-RSRP-ThresholdSSB			dBm	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [2].
DL CCA probability		Note 4, 6		0.9375	
P_{CCA_DL}		Note 5, 6		0.75/0.75	
L_{CCA_DL} Note 7				4	
W_{CCA_DL} Note 8				Inf	
UL CCA probability		Note 4, 6		0.87	
P_{CCA_UL}		Note 5, 6		0.75	
L_{CCA_UL} Note 7				5	
W_{CCA_UL} Note 8				Inf	
Semi-static channel access config period Note 4, 6			ms	2	
Propagation Condition			-	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.
Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.
Note 3: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.
Note 4: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 5: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2}.
Note 6: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic channel occupancy and semi-static channel occupancy configuration.
Note 7: L_{CCA_DL} and L_{CCA_UL} are chosen such that preambleTransMax > 5 + L_{CCA_DL} + L_{CCA_UL}.

Note 8:	A window W_{CCA_DL}=W_{CCA_UL}=Inf is used to indicate that L_{CCA_DL} and L_{CCA_UL} are considered during the entire duration of a test run.

A.10.1.1.1.4.2 Test Requirements

Non-Contention based random access is triggered by explicitly assigning a random access preamble via dedicated signalling in the downlink. In the test, the non-contention based random access procedure is not initialized for Other SI requested from UE or beam failure recovery.

A.10.1.1.1.4.2.1 MsgA Transmission

In Test-1, to test the UE behavior specified in Clause 6.2.2A.3.2.1 for MsgA transmission, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs configured, the System Simulator shall receive the MsgA which has the Preamble Index associated with the SSB with index 0.

In addition, the System Simulator shall receive the MsgA on the PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0, and the selected PRACH occasion shall belong to the PRACH occasions permitted by the restrictions given first by the *msgA-SSB-SharedRO-MaskIndex* if configured, or next by the *ra-ssb-OccasionMaskIndex* if configured.

The three requirements below are relevant for all cases of MsgA transmissions described within the clause A.10.1.1.1.4.2:

- The System Simulator shall implement the UL CCA model for the MsgA occasions (i.e. both MsgA PRACH and MsgA PUSCH occasions) where MsgA transmissions are expected. The System Simulator shall monitor the MsgA occasions to detect if the UE is transmitting MsgA. If a MsgA transmission is detected on MsgA occasions that are expected to have UL CCA failure, the test is considered as failed.

- In case of CCA DL failure, the test equipment should verify that the UE does not transmit MsgA for semi-static channel access mode; for dynamic channel access mode it is assumed that MsgA occasions are always scheduled within a UE-initiated COT.

- The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS38.321 [7], and transmit with the calculated PRACH transmission power in case of UL CCA failure.

In addition, the power applied to all MsgA transmission shall be in accordance with what is specified in Clause 6.2.2A.2. The power of the first MsgA preamble shall be -16 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.10.1.1.1.4.2.2 MsgB Reception

To test the UE behavior specified in Clause 6.2.2A.3.2.2 the System Simulator shall transmit a MsgB containing a successRAR MAC subPDU corresponding to the transmitted Random Access Preamble after 5 MsgA transmissions have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a MsgB *not* corresponding to the transmitted Random Access Preamble. In case of CCA DL failure, the test equipment should delay the transmission of MsgB.

The UE may stop monitoring for MsgB if the MsgB contains a successRAR MAC subPDU corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS38.321 [7], and transmit with the calculated MsgA transmission power if Random Access Responses Reception has not been considered as successful.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2A.3. The power of the first MsgA preamble shall be -16 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.10.1.1.1.4.2.3 No MsgB Reception

To test the UE behavior specified in clause 6.2.2A.3.2.3 the System Simulator shall transmit a MsgB corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles. In case of CCA DL failure, the test equipment should delay the transmission of MsgB.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS38.321 [7], and transmit with the calculated MsgA transmission power when the backoff time expires if no MsgB is received within the MsgB Response window configured in *RACH-ConfigGenericTwoStepRA.*

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2A.3. The power of the first MsgA preamble shall be -16 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.10.1.2 Handover with PSCell from EN-DC to EN-DC with known target PSCell using CCA

A.10.1.2.1 Test Purpose and Environment

This test is to verify the requirement for E-UTRA handover with NR PSCell change, where NR PSCell is on carrier with CCA. The requirements for EN-DC HO with PSCell change on CCA are specified in clause 5.9 in E-UTRA RRM specification [15] for the case when the target PSCell is on carrier with CCA. Supported test configurations are shown in table A.10.1.2.1-1.

Table A.10.1.2.1-1 gives general test configurations for Handover with PSCell from EN-DC to EN-DC, Table A.10.1.2.1-2 provides general test parameters for Handover from E-UTRA to E-UTRA cell in EN-DC to EN-DC, Table A.10.1.2.1-3 provides E-UTRAN cell specific test parameters for Handover with PSCell from EN-DC to EN-DC, Table A.10.1.2.1-4 provides general test parameters for PSCell change from FR1 carrier under CCA to FR1 carrier under CCA, Table A.10.1.2.1-5 provides cell specific test parameters for PSCell change from FR1 carrier under CCA to FR1 carrier under CCA.

In the test there are four cells: Cell1 and Cell2 are PCell and target PCell on E-UTRA carrier, Cell3 and Cell4 are PSCell and target PSCell on NR CCA carrier. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. Before the test starts the UE is connected to Cell1 (E-UTRA PCell) and Cell3 (NR PSCell) with EN-DC mode.

At the start of time duration T1, the UE do not have any information of cell 2 and cell 4. AT the end of T1, UE is configured with neighbour cell measurements on the Cell 3 and Cell 4 for Event A3 conditional measurement report.

During T2, UE acquires the timing information of Cell3 and Cell 4 and performs L3-RSRP measurements on the configured neighbour cells. UE sends measurement report to the Cell1 to indicate the event triggering condition A3 is satisfied for the configured for neighbour cells. By end of T2, E-UTRA PCell (Cell1) shall send a RRC message implying handover with PSCell change.

The start of T3 is defined as the end of the last TTI containing the RRC message implying handover with PSCell. UE shall complete PRACH transmission to PCell and PSCell by end of T3.

Table A.10.1.2.1-1: General test configurations for Handover with PSCell from EN-DC to EN-DC with CCA on NR Cell

Config	Description
1	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations depending on the UE capability	

Table A.10.1.2.1-2: General test parameters for Handover from E-UTRA to E-UTRA cell in EN-DC to EN-DC

Parameter		Unit	Value	Comment
RF Channel Number			1, 2	One is E-UTRA RF channel and one is NR RF channel
Initial conditions	Active PCell		Cell1	On E-UTRA RF channel number 1.
	E-UTRA Neighbouring cell		Cell2	On E-UTRA RF channel number 1.
Final conditions	Active PCell		Cell2	
CP length			Normal	Applicable to Cell1, Cell2, Cell3 and Cell4.
A3-Offset		dB	0	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
DRX			OFF	Continuous monitoring of primary cell
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between same RAT cells		μs	3	Synchronous cells
T1		s	5	
T2		s	≤5	
T3		s	1	Tinterrupt is defined in clause 6.1B.1.2

Table A.10.1.2.1-3: E-UTRAN cell specific test parameters for Handover with PSCell from EN-DC to EN-DC

Parameter	Unit	Cell1			Cell2		
		T1	T2	T3	T1	T2	T3
Duplex mode		FDD or TDD			FDD or TDD		
TDD special subframe configuration[Note1]		6			6		
TDD uplink-downlink configuration[Note1]		1			1		
$BW_{channel}$		5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100			5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100		

PDSCH parameters: DL Reference Measurement Channel[Note2]		5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD 5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD			5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD 5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD		
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD 5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD			5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD 5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD		
OCNG Patterns defined in A.3.2.1 (FDD) and in A.3.2.2(TDD) [Note2]		5 MHz: OP.20 FDD 10MHz: OP.1 FDD 20 MHz: OP.17 FDD 5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	OP.18 FDD OP.2 FDD OP.14 FDD OP.10 TDD OP.2 TDD OP.8 TDD		5MHz: OP.18 FDD 10MHz: OP.2 FDD 20MHz: OP.14 FDD 5MHz: OP.10 TDD 10MHz: OP.2 TDD 20MHz: OP.8 TDD	OP.20 FDD OP.1 FDD OP.17 FDD OP.9 TDD OP.1 TDD OP.7 TDD	
PRACH configuration		-			4, As specified in table 5.7.1-2 in TS 36.211		
PBCH_RA	dB	0			0		
PBCH_RB	dB						
PSS_RA	dB						
SSS_RA	dB						
PCFICH_RB	dB						
PHICH_RA	dB						
PHICH_RB	dB						
PDCCH_RA	dB						
PDCCH_RB	dB						
PDSCH_RA	dB						
PDSCH_RB	dB						
OCNG_RA[Note3]	dB						
OCNG_RB[Note3]	dB						
N_{oc}[Note4]	dBm/15 kHz	-98					
$\hat{E}_s/N_{oc}$	dB	8	8	8	-infinite	11	11
$\hat{E}_s/I_{ot}$	dB	8	-3.3	-3.3	-infinite	2.36	2.36
RSRP [Note5]	dBm/15 kHz	-90	-90	-90	-infinite	-87	-87
SCH_RP [Note5]	dBm/15 kHz	-90	-90	-90	-infinite	-87	-87
Io [Note5]	dBm/Ch BW	-61.58	-57.23+10log($N_{RB,c}$/50)		N/A	-57.23+10log($N_{RB,c}$/50)	
Propagation Condition		AWGN					
Antenna Configuration		1x2					

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211.
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: E_s/I_{ot}, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.10.1.2.1-4: General test parameters for PSCell change from FR1 carrier under CCA to FR1 carrier under CCA

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 3	On the carrier under CCA
	Neighbouring cell		Cell 4	On the carrier under CCA
Final condition	Active cell		Cell 4	On the carrier under CCA
DL CCA model	Dynamic channel access Note 1, 3		As specified in clause A.3.20.2.1	
	Semi-static channel access Note 2, 3			
UL CCA model	Dynamic channel access Note 1, 3		As specified in clause A.3.20.2.2	
	Semi-static channel access Note 2,3			
A3-Offset		dB	0	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T304		ms	500	
L_{CCA_DL}			5	
W_{CCA_DL}		ms	T304	
L_{CCA_UL}			5	
W_{CCA_UL}		ms	T304	
T1		s	5	
T2		s	≤ 5	
T3		s	≥ $T_{interrupt}$	$T_{interrupt}$ is defined in clause 6.1B.1.2

NOTE 1: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy.
NOTE 2: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy.
NOTE 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

Table A.10.1.2.1-5: Cell specific test parameters for PSCell change from FR1 carrier under CCA to FR1 carrier under CCA

Parameter	Unit	Cell 3			Cell 4		
		T1	T2	T3	T1	T2	T3
NR RF Channel Number		1			1		
P_{CCA_DL} for dynamic channel access Note 4,6	-	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75			$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		
P_{CCA_DL} for semi-static channel access Note 5,6	-	P_{CCA_DL}=0.9375			P_{CCA_DL}=0.9375		
P_{CCA_UL} for dynamic channel access Note 4,6	-	0.75			0.75		
P_{CCA_UL} for semi-static channel access Note 5,6	-	0.87			0.87		

TDD configuration	Config 1, 2		TDDConf.1.1 CCA					
$BW_{channel}$	Config 1, 2		40: $N_{RB,c}$ = 106					
BWP BW	Config 1, 2		40: $N_{RB,c}$ = 106					
DRX Cycle		ms	Not Applicable					
PDSCH Reference	Config 1, 2		SR.1.1 CCA					
CORESET Reference Channel	Config 1, 2		CR.1.1 CCA					
Dedicated CORESET RMC configuration	Config 1, 2		CCR.1.1 CCA					
TRS configuration	Config 1, 2		TRS.1.1 TDD					
OCNG Patterns			OP.1					
SMTC Configuration			SMTC.1					
DBT window configuration	Config 1, 2		DBT.1					
SSB configuration for semi-static channel access Note 4, 6	Config 1, 2		SSB.1 CCA					
SSB configuration for dynamic channel access Note 5, 6	Config 1, 2		SSB.2 CCA					
ssb-PositionQCL	Config 1, 2		[1]					
PDSCH/PDCCH subcarrier spacing	Config 1, 2	kHz	30 kHz					
PUCCH/PUSCH subcarrier spacing	Config 1, 2	kHz	30 kHz					
PRACH configuration			FR1 PRACH configuration 1 under CCA					
BWP configuration	Initial DL BWP		DLBWP.0.1					
	Dedicated DL BWP		DLBWP.1.1					
	Initial UL BWP		ULBWP.0.1					
	Dedicated UL BWP		ULBWP.1.1					
EPRE ratio of PSS to SSS		dB	0					
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} Note2		dBm/15kHz	-98					
N_{oc} Note2	Config 1, 2	dBm/SCS	-95					
$\hat{E}_s / I_{ot}$		dB	8	-3.3	-3.3	-Infinity	2.36	2.36
$\hat{E}_s / N_{oc}$		dB	8	8	8	-Infinity	11	11
SSB_RP	Config 1, 2	dBm/SCS	-87	-87	-87	-Infinity	-84	-84
Io Note3	Config 1, 2	dBm/38.16MHz	-55.31	-50.96	-50.96	-55.31	-50.96	-50.96
Propagation condition		-	AWGN			AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3:	Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 5:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 6:	For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

A.10.1.2.2 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 60 ms from the beginning of time period T3.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover requirements for handover with PSCell for EN-DC is defined in clause 5.9 in [15] as:

$D_{HOwithPSCel_PCell} = T_{RRC_delay} + T_{search} + T_{IU} + T_{processing}$

Where:

T_{RRC_delay} = 20 ms for 'RRC connection reconfiguration (NR SCG establishment/ /modification/release)'.

T_{search} = 0 ms for known cell.

T_{IU} = 15 ms in the test configuration.

$T_{processing}$ = 25ms for source Cell and target Cell are in the same FR.

This gives a total of 60ms for handover delay.

The UE shall transmit the PRACH preamble to Cell 4 less than $D_{HOwithPSCell_PSCell}$ from the beginning of time period T3.

NOTE: The PSCell change delay for handover with PSCell for EN-DC is defined in clause 5.8 in [15] as:

$D_{HOwithPSCell_PSCell} = T_{RRC_delay} + T_{processing} + T_{search} + T_{\Delta} + T_{IU_PSCell} + 2$ ms

Where:

T_{RRC_delay} = 20 ms for 'RRC connection reconfiguration (NR SCG establishment/ /modification/release)'.

$T_{processing}$ = 25ms for source Cell and target Cell are in the same FR.

T_{search} = 0 ms for known cell.

$T_{\Delta} = (1+ L_2) *20$ ms.

$T_{IU} = (1+ L_3) *10 + 10$ ms

L_2 is the number of SMTC occasions not available at the UE during the time tracking period where $L_2 \leq L_{CCA_DL}$, and L_3 is the number of consecutive SSB to PRACH occasion association periods during which no PRACH occasion is available for PRACH transmission due to UL CCA failure, where $L_3 \leq L_{CCA_UL}$. $L_3 = 0$ for Type 2C UL channel access procedure as defined in TS 37.213 [33]. The interruption time considering the potential extensions caused by L_1, L_2, L_3 and by the UL CCA failure detection/recovery mechanism is limited by the T304 timer. The UE behaviour at the T304 timer expiry is detailed in TS 38.331 [2]. Test equipment should make sure that L_{CCA_DL} and L_{CCA_UL} are not exceeded during a test by monitoring the number of CCA failures and preventing additional CCA failures from happening after L_{CCA_DL} or L_{CCA_UL} is reached.

The rate of correct PSCell addition observed during repeated tests shall be at least 90%.

A.10.2 Timing

A.10.2.1 UE transmit timing

A.10.2.1.1 UE Transmit Timing Test with PSCell under DL CCA

A.10.2.1.1.1 Test Purpose and environment

The purpose of this test is to verify that the UE can follow frame timing change of the connected gNodeb when PSCell is subject to DL CCA and that the UE initial transmit timing accuracy, maximum amount of timing change in one adjustment, minimum and maximum adjustment rate are within the specified limits. This test will verify the requirements in clause 7.1.2. Supported test configurations are shown in Table 10.2.1.1.1-1.

Table A.10.2.1.1.1-1: Supported test configurations for UE transmit timing test

Config	Description
1	LTE FDD, With CCA: NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
2	LTE TDD, With CCA: NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note 1: The UE is only required to be tested in one of the supported test configurations.	

The test consists of E-UTRA PCell and NR PSCell, which is subject to DL CCA. The configuration for E-UTRA is given in A.3.7.2.1. Table A.10.2.1.1.1-2 defines the parameters to be configured and strength of the transmitted signals. The transmit timing is verified by the UE transmitting SRS using the configuration defined in Table A.10.2.1.1.1-3.

Table A.10.2.1.1.1-2: Cell Specific Test Parameters for UE Transmit Timing test

Parameter		Unit	Config	Test1	Test2
SSB ARFCN			1,2	Freq1	Freq1
TDD configuration			1,2	TDDConf.1.1 CCA	
$BW_{channel}$		MHz	1,2	40: $N_{RB,c}$ = 106	
Initial BWP Configuration			1,2	DLBWP.0.1 ULBWP.0.1	
Dedicated BWP Configuration			1,2	DLBWP.1.1 ULBWP.1.1	
DRX Cycle		ms	1,2	N/A	DRX.8[Note5]
DL CCA model			1,2	As specified in clause A.3.26.2.1	
UL CCA model			1,2	As specified in clause A.3.26.2.2	
PDSCH Reference			1,2	SR.1.1 CCA	
CORESET Reference			1,2	CR.1.1 CCA	
OCNG Patterns			1,2	OCNG pattern 1	
SSB configuration	Semi- static channel acces		1,2	SSB.1 CCA	
	Dymamic channel acces		1,2	SSB.2 CCA	
SMTC configuration			1,2	SMTC.1 FR1	
TRS configuration			1,2	TRS.1.2 TDD	
DL CCA probability for semi-static channel access (P_{CCA_DL})			1,2	0.9375	0.9375
DL CCA model probability for dynamic static channel access ($P_{CCA_DL_1}$)			1,2	0.75	0.75
DL CCA model probability for dynamic static channel access ($P_{CCA_DL_2}$)			1,2	0.75	0.75
UL CCA probability (P_{CCA_UL})			1,2	1	1
EPRE ratio of PSS to SSS					
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					

EPRE ratio of PDCCH DMRS to SSS EPRE ratio of PDCCH to PDCCH DMRS EPRE ratio of PDSCH DMRS to SSS EPRE ratio of PDSCH to PDSCH EPRE ratio of OCNG DMRS to SSS (Note 1) EPRE ratio of OCNG to OCNG DMRS (Note 1)	dB	1,2	0	0
N_{oc} Note2	dBm/30 kHz	1,2	-95	-95
$\hat{E}_s / I_{ot}$		1,2	3	3
$\hat{E}_s / N_{oc}$		1,2	3	3
SS-RSRP Note3	dBm/30 kHz	1,2	-92	-92
Io Note3	dBm/38.1MHz	1,2	-59.2	-59.2
Propagation condition		1,2	AWGN	
SRS Config		1,2	SRSConf.1 Note6	SRSConf.2 Note6

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: DRX related parameters are given in Table A.3.3.8-1
Note 6: SRS configs are given in Table A.10.2.1.1.1-3.
Note 7: Parameters P_{CCA_DL}, $P_{CCA_DL_1}$, $P_{CCA_DL_2}$ and P_{CCA_UL} are defined in clause A.3.26.2.
Note 8: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

Table A.10.2.1.1.1-3: SRS Configuration for UE transmit timing

	Field	SRSConf.1	SRSConf.2	Comments
SRS-ResourceSet	srs-ResourceSetId	0	0	
	srs-ResourceIdList	0	0	
	resourceType	Periodic	Periodic	
	Usage	Codebook	Codebook	
SRS-Resource	SRS-ResourceId	0	0	
	nrofSRS-Ports	Port1	Port1	
	transmissionComb	n2	n2	
	combOffset-n2	0	0	
	cyclicShift-n2	0	0	
	resourceMapping startPosition	0	0	
	resourceMapping nrofSymbols	n1	n1	
	resourceMapping repetitionFactor	n1	n1	
	freqDomainPosition	0	0	
	freqDomainShift	0	0	
	freqHopping c-SRS	14 for test configuration 1,2 25 for test configuration 3	25	Matches $N_{RB,c}$
	freqHopping b-SRS	0	0	
	freqHopping b-hop	0	0	
	groupOrSequenceHopping	Neither	Neither	

	resourceType	Periodic	Periodic	
	periodicityAndOffset-p	sl1, 0	sl640, 0	Offset to align with DRx periodicity
	sequenceId	0	0	Any 10 bit number

A.10.2.1.1.2 Test requirements

The test sequence shall be carried out in RRC_CONNECTED for every test case.

Following will be the test sequence for this test

1) Set up E-UTRA PCell according to parameters given in Table A.3.7.2.1-1 and setup NR PSCell according to parameters given in Table A.10.2.1.1.1-1.

2) After connection set up with the cell, the test equipment will verify that the timing of the NR cell is within $(N_{TA} + N_{TA_offset})\times T_c \pm T_e$ of the first detected path of DL SSB.

   a. The N_{TA} offset value (in T_c units) is 25600

   b. The T_e values depend on the DL and UL SCS for which the test is being run and are given in Table 7.1.2-1

3) The test system shall adjust the timing of the DL path by values given in Table A.10.2.1.1.2-1

Table A.10.2.1.1.2-1: Adjustment Value for DL Timing

SCS of SSB signals (kHz)	Adjustment Value	
	Test1	Test2
30	$+32*64T_c$	$+16*64T_c$

4) The test system shall verify that the adjustment step size and the adjustment rate shall be according to requirements specified in Clause 7.1.2 Table 7.1.2.1-1 until the UE transmit timing offset is within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ respective to the first detected path (in time) of DL SSB. Skip this step for test 2 with DRX configured.

5) The test system shall verify that the UE transmit timing offset stays within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first detected path of DL SSB. For Test 2 the UE transmit timing offset shall be verified for the first transmission in the DRX cycle immediately after DL timing adjustment.

A.10.2.2 UE timing advance

A.10.2.2.1 UE Timing Advance Adjustment Accuracy with PSCell under DL CCA

A.10.2.2.1.1 Test Purpose and Environment

The purpose of the test is to verify UE Timing Advance adjustment delay and accuracy requirement defined in clause 7.3.

A.10.2.2.1.2 Test Parameters

Supported test configurations are shown in table A.10.2.2.1.2-1. Both timing advance adjustment delay and accuracy are tested by using the parameters in table A.10.2.2.1.2-2, A.10.2.2.1.2-3 and A.10.2.2.1.2-4. The configuration of Cell 1 (LTE PCell) is specified in clause A.3.7.2.1.

In all test cases, two cells are used. Cell 1 is the PCell in the primary Timing Advance Group (pTAG) and cell 2 is the PSCell which is subject to DL CCA is in the secondary Timing Advance Group (sTAG). Each test consists of two successive time periods, with time duration of T1 and T2 respectively. In each time period, timing advance

commands for sTAG are sent to the UE and Sounding Reference Signals (SRS), as specified in table A.10.2.2.1.2-3, are sent from the UE and received by the test equipment. By measuring the reception of the SRS, the transmit timing, and hence the timing advance adjustment accuracy, can be measured for PSCell in sTAG.

During time period T1, the test equipment shall send one message with a Timing Advance Command MAC Control Element for sTAG, as specified in clause 6.1.3.4 in TS 38.321 [7]. The Timing Advance Command value shall be set to 31, which according to clause 4.2 in TS 38.213 [3] results in zero adjustment of the Timing Advance. In this way, a reference value for the timing advance for sTAG used by the UE is established.

During time period T2, the test equipment shall send a sequence of messages with Timing Advance Command MAC Control Elements for sTAG, with Timing Advance Command value specified in table A.10.2.2.1.2-2. This value shall result in changes of the timing advance for sTAG used by the UE, and the accuracy of the change shall then be measured, using the SRS sent from the UE.

As specified in clause 7.3.2.1, the UE adjusts its uplink timing at slot n+k for a timing advance command received in slot n. This delay must be taken into account when measuring the timing advance adjustment accuracy, via the SRS sent from the UE.

The UE Time Alignment Timer, described in clause 5.2 in TS 38.321, shall be configured so that it does not expire in the duration of the test.

Table A.10.2.2.1.2-1: Supported test configurations for timing advance test

Config	Description
1	LTE FDD, With CCA: NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
2	LTE TDD, With CCA: NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note 1: The UE is only required to be tested in one of the supported test configurations. Note 2: The UE supporting EN-DC only on NR band(s) with shared spectrum access is required to be tested	

Table A.10.2.2.1.2-2: General test parameters for timing advance test

Parameter	Unit	Value	Comment
RF channel number		Cell 1: 1 Cell 2: 2	1 for E-UTRAN PCell 2 for NR PSCell
Initial DL BWP		DLBWP.0.1	As specified in Table A.3.9.2.1-1
Dedicated DL BWP		DLBWP.1.1	As specified in Table A.3.9.2.2-1
Initial UL BWP		ULBWP.0.1	As specified in Table A.3.9.3.1-1
Dedicated UL BWP		ULBWP.1.1	As specified in Table A.3.9.3.2-1
Timing Advance Command (T_A) value during T1		31	$N_{TA_new} = N_{TA_old}$ for the purpose of establishing a reference value from which the timing advance adjustment accuracy can be measured during T2
Timing Advance Command (T_A) value during T2		39	*For 30 kHz SCS* $N_{TA_new} = N_{TA_old} + 4096*T_c$ (based on equation in clause 4.2 of TS 38.213 [3])
T1	s	5	
T2	s	5	

Table A.10.2.2.1.2-3: Cell specific test parameters for timing advance test

Parameter		Unit	Test1	
			T1	T2
TDD configuration	Config 1,2		TDDConf.1.1 CCA	
$BW_{channel}$	Config 1,2	MHz	40: $N_{RB,c}$ = 106	
BWP BW	Config 1,2	MHz	40: $N_{RB,c}$ = 106	

DRX Cycle		Config 1,2	ms	Not Applicable
DL CCA model		Config 1,2		As specified in clauseA.3.26.2.1
UL CCA model		Config 1,2		As specified in clause A.3.26.2.2
PDSCH Reference		Config 1,2		SR.1.1 CCA
CORESET Reference		Config 1,2		CR.1.1 CCA
TRS configuration		Config 1,2		TRS.1.2 TDD
OCNG Patterns		Config 1,2		OCNG pattern 1
SSB Configuration	Semi-static channel acces	Config 1,2		SSB.1 CCA
	Dymamic channel acces	Config 1,2		SSB.2 CCA
SMTC configuration		Config 1,2		SMTC.1 FR1
DL CCA probability for semi-static channel access (P_{CCA_DL})		Config 1,2		1
DL CCA model probability for dynamic static channel access ($P_{CCA_DL_1}$)		Config 1,2		1
DL CCA model probability for dynamic static channel access ($P_{CCA_DL_2}$)		Config 1,2		1
UL CCA probability P_{CCA}		Config 1,2		1
EPRE ratio of PSS to SSS			dB	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	Config 1,2		dBm/30 kHz	-95
	Config 3,6			-95
$\hat{E}_s / I_{ot}$			dB	3
$\hat{E}_s / N_{oc}$			dB	3
Io Note3	Config 1,2		dBm/38.16MHz	-62.58
Propagation condition			-	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Parameters P_{CCA_DL}, $P_{CCA_DL_1}$, $P_{CCA_DL_2}$ and P_{CCA_UL} are defined in clause A.3.26.2.

Note 5: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

Table A.10.2.2.1.2-4: Sounding Reference Symbol Configuration for timing advance test

Field		Value	Comment
c-SRS	Config 1,2	24	Frequency hopping is disabled
b-SRS		0	
b-hop		0	
freqDomainPosition		0	Frequency domain position of SRS
freqDomainShift		0	
groupOrSequenceHopping		neither	No group or sequence hopping
SRS-PeriodicityAndOffset		sl5=4 for SCS 30kHz	Once every 5 slots
pathlossReferenceRS		ssb-Index=0	SSB #0 is used for SRS path loss estimation
usage		Codebook	Codebook based UL transmission
startPosition		0	resourceMapping setting: SRS on last symbol of slot, and 1symbols for SRS without repetition.
nrofSymbols		n1	
repetitionFactor		n1	
combOffset-n2		0	transmissionComb setting
cyclicShift-n2		0	
nrofSRS-Ports		port1	Number of antenna ports used for SRS transmission
Note: For further information see clause 6.3.2 in TS 38.331 [2].			

A.10.2.2.1.3 Test Requirements

The UE shall apply the signalled Timing Advance value for PSCell in sTAG to the transmission timing at the designated activation time i.e. *k+1* slots after the reception of the timing advance command, where k=5.

The Timing Advance adjustment accuracy for PSCell in sTAG shall be within the limits specified in clause 7.3.2.2.

The rate of correct Timing Advance adjustments observed during repeated tests shall be at least 90%.

A.10.3 Signalling characteristics

A.10.3.1 Radio link monitoring

A.10.3.1.1 Introduction

In the test cases specified in clause A.10.3.1, any uplink signal transmitted by the UE is used for detecting the in-/out-of-sync state of the UE. In terms of measurement, the uplink signal is verified based on the UE output power:

- UE output power higher than Transmit OFF power -50 dBm (as defined in TS 38.101-3 [20]) means uplink signal
- UE output power equal to or less than Transmit OFF power -50 dBm (as defined in TS 38.101-3 [20]) means no uplink signal.

For intra-band contiguous carrier aggregation, transmit OFF power is measured as the mean power per component carrier.

For UE with multiple transmit antennas, transmit OFF power is measured as the mean power at each transmit connector.

A.10.3.1.2 Radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode

A.10.3.1.2.1 Test purpose and environment

The purpose of this test is to verify that the UE properly detects the out-of-sync and in-sync for the purpose of monitoring downlink radio link quality of the PSCell. This test will partly verify the FR1 PSCell radio link monitoring requirements in clause 8.1A.

In the test, UE is configured to perform RLM based on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to '*rlf*'. Supported test configurations are shown in table A.10.3.1.2.1-1. The test parameters are given in Tables A.10.3.1.2.1-2, A.10.3.1.2.1-3, and A.10.3.1.2.1-4 below. There are two cells in the test: Cell 1 is the E-UTRAN PCell, and Cell 2 is the FR1 PSCell which operates on a carrier frequency with CCA and transmits SSBs in DBT windows according to DL CCA model. The E-UTRAN PCell setting refers to Table A.3.7.2.1-1.

The test consists of three successive time periods, with time duration of T1, T2 and T3, respectively. Figure A.10.3.1.2.1-1 shows the variation of the downlink SNR in the active Cell 2 to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and Cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. The UE transmits according to UL CCA model. The UE is configured to perform inter-frequency measurements using Gap Pattern ID #0 (40 ms) in the test.

Table A.10.3.1.2.1-1: Supported test configurations.

Configuration	Description
1	LTE FDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
2	LTE TDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
NOTE: The UE is only required to pass in one of the supported test configurations above.	

Table A.10.3.1.2.1-2: General test parameters for PSCell out-of-sync testing in non-DRX mode.

Parameter		Unit	Value
			Test 1
Active E-UTRA PCell			Cell 1
E-UTRA RF Channel Number			1
Active PSCell			Cell 2
RF Channel Number			2
DL CCA model			As specified in clause A.3.26.2.1
UL CCA model			As specified in clause A.3.26.2.2
Duplex mode	Config 1,2		TDD
$BW_{channel}$	Config 1,2	MHz	40: $N_{RB,c}$ = 106
DL initial BWP configuration	Config 1,2		[DLBWP.0.1]
DL dedicated BWP configuration	Config 1,2		[DLBWP.1.1]
UL initial BWP configuration	Config 1,2		[ULBWP.0.1]
UL dedicated BWP configuration	Config 1,2		[ULBWP.1.1]
TDD configuration	Config 1,2		TDDConf.1.1 CCA
CORESET Reference Channel	Config 1,2		CR.1.1 CCA
SSB configuration for semi-static	Config 1,2		SSB.1 CCA

channel access[Note 4, 6]			
SSB configuration for dynamic channel access[Note 5, 6]	Config 1,2		SSB.2 CCA
DBT window configuration	Config 1,2		DBT.1
PDSCH/PDCCH subcarrier spacing	Config 1,2		30 kHz
PRACH Configuration	Config 1,2		FR1 PRACH configuration 1 under CCA
SSB index assigned as RLM RS			0
OCNG parameters			[OP.1]
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		[1-0]
	Number of Control OFDM symbols		[2]
	Aggregation level	CCE	[8]
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	[4]
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	[4]
	DMRS precoder granularity		REG bundle size
	REG bundle size		[6]
DRX			OFF
Gap pattern ID			gp0
Layer 3 filtering			Enabled
T310 timer		ms	0
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1,2		[CSI-RS.2.1 TDD]
CSI-RS for tracking	Config 1,2		[TRS.1.2 TDD]
T1		s	0.2
T2		s	1.04
T3		s	1.04
D1		s	1

NOTE 1: All configurations are assigned to the UE prior to the start of time period T1.
NOTE 2: UE-specific PDCCH is not transmitted after T1 starts.
NOTE 3: E-UTRAN is in non-DRX mode under test.
Note 4: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 5: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 6: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

Table A.10.3.1.2.1-3: Cell-specific test parameters for PSCell out-of-sync testing in non-DRX mode.

Parameter	Unit	Test 1					
		T1	T2	T3			

DL CCA probability P_{CCA_DL}	Note 6,8		P_{CCA_DL}=0.9375					
	Note 7,8		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75					
UL CCA probability P_{CCA_UL}			1					
EPRE ratio of PDCCH DMRS to SSS		dB	4					
EPRE ratio of PDCCH to PDCCH DMRS		dB	0					
EPRE ratio of PBCH DMRS to SSS		dB	0					
EPRE ratio of PBCH to PBCH DMRS		dB						
EPRE ratio of PSS to SSS		dB						
EPRE ratio of PDSCH DMRS to SSS		dB						
EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
SNR[Note 3,4] on RLM-RS	Config 1,2	dB	1	[-7]	-15			
SNR on other channels and signals	Config 1,2	dB	1					
N_{oc}	Config 1,2	dBm/ SCS	-95					
Propagation condition			TDL-C 300 ns 100 Hz					

NOTE 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in slots with RMC burst transmission and is not transmitted during muted slots or during DBT windows.
NOTE 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
NOTE 3: SNR levels correspond to the signal to noise ratio over the transmitted SSS REs during DBT windows.
NOTE 4: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3, respectively, in Figure A.10.3.1.2.1-1.
NOTE 5: The SNR values are specified for testing a UE which supports 2 RX on at least one band. For testing of a UE which supports 4 RX on all bands, the SNR during T3 is A.3.6.
NOTE 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
NOTE 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
NOTE 8: For UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

Table A.10.3.1.2.1-4: Measurement gap configuration for PSCell out-of-sync testing in non-DRX mode.

Field	**Test 1**	
	Value	
gapOffset	0	

NOTE 1: E-UTRAN PCell and PSCell are SFN-synchronous and frame boundary aligned.
NOTE 2: Ensure that RLM RS is partially overlapped with measurement gap.

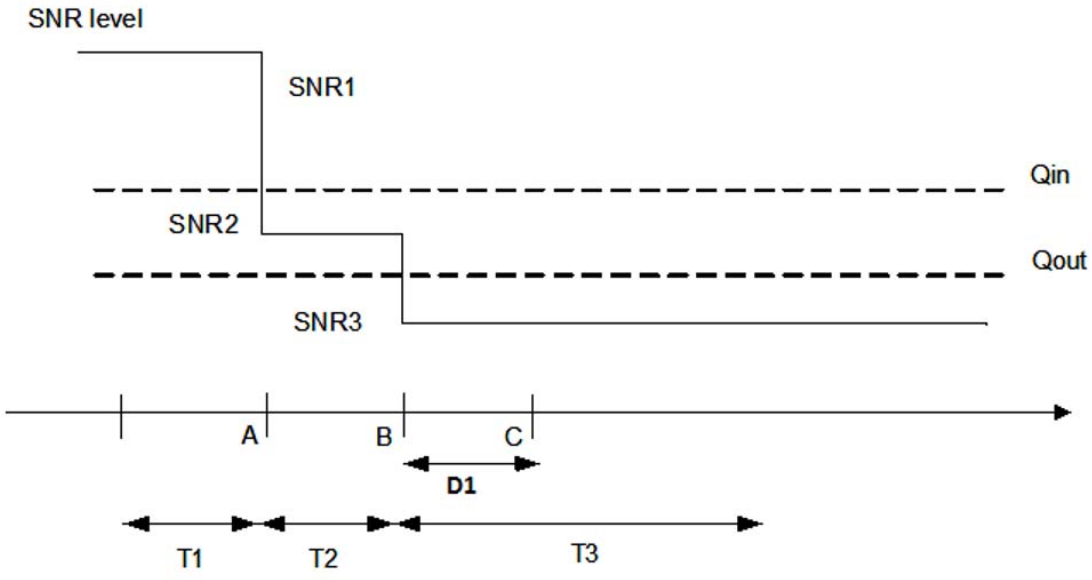

Figure A.10.3.1.2.1-1: SNR variation for out-of-sync testing.

A.10.3.1.2.2 Test requirements

The UE behaviour in each test during time durations T1, T2 and T3 shall be as follows:

- During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.
- The UE shall stop transmitting uplink signal no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

A.10.3.1.3 Radio link monitoring in-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode

A.10.3.1.3.1 Test purpose and environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PSCell. This test will partly verify the FR1 PSCell radio link monitoring requirements in clause 8.1A.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to '*rlf*'. Supported test configurations are shown in table A.10.3.1.3.1-1. The test parameters are given in Tables A.10.3.1.3.1-2, and A.10.3.1.3.1-3 below. There are two cells in the test: Cell 1 is the E-UTRAN PCell, and Cell 2 is the FR1 PSCell which operates on a carrier frequency with CCA and transmits SSBs in DBT windows according to DL CCA model. The E-UTRAN PCell setting refers to Table A.3.7.2.1-1.

The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.10.3.1.3.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. The UE transmits according to UL CCA model.

Table A.10.3.1.3.1-1: Supported test configurations.

Configuration	Description
1	LTE FDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
2	LTE TDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
NOTE: The UE is only required to pass in one of the supported test configurations above.	

Table A.10.3.1.3.1-2: General test parameters for PSCell in-sync testing in non-DRX mode.

Parameter		Unit	Value
			Test 1
Active E-UTRA PCell			Cell 1
E-UTRA RF Channel Number			1
Active PSCell			Cell 2
RF Channel Number			2
DL CCA model			As specified in clause A.3.26.2.1
UL CCA model			As specified in clause A.3.26.2.2
Duplex mode	Config 1,2		TDD
$BW_{channel}$	Config 1,2	MHz	40: $N_{RB,c}$ = 106
DL initial BWP configuration	Config 1,2		[DLBWP.0.1]
DL dedicated BWP configuration	Config 1,2		[DLBWP.1.1]
UL initial BWP configuration	Config 1,2		[ULBWP.0.1]
UL dedicated BWP configuration	Config 1,2		[ULBWP.1.1]
TDD Configuration	Config 1,2		TDDConf.1.1 CCA
CORESET Reference Channel	Config 1,2		CR.1.1 CCA
SSB configuration for semi-static channel access Note 3, 5	Config 1,2		SSB.1 CCA
SSB configuration for dynamic channel access Note 4,5	Config 1,2		SSB.2 CCA
DBT window configuration	Config 1,2		DBT.1
PDSCH/PDCCH subcarrier spacing	Config 1,2		30 kHz
PRACH Configuration	Config 1,2		FR1 PRACH configuration 1 under CCA
SSB index assigned as RLM RS			0
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
	DCI format		1-0

In sync transmission parameters	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			*OFF*
Gap pattern ID			N/A
Layer 3 filtering			*Enabled*
T310 timer		ms	2000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1,2		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1,2		TRS.1.2 TDD
T1		s	0.2
T2		s	0.2
T3		s	0.52
T4		s	0.2
T5		s	2.04
D1		s	2

NOTE 1: All configurations are assigned to the UE prior to the start of time period T1.
NOTE 2: UE-specific PDCCH is not transmitted after T1 starts.
NOTE 3: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
NOTE 4: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
NOTE 5: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

Table A.10.3.1.3.1-3: Cell-specific test parameters for PSCell in-sync testing in non-DRX mode.

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
DL CCA probability P_{CCA_DL}	Note 6,8		P_{CCA_DL}=0.9375				
	Note 7,8		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75				
UL CCA probability P_{CCA_UL}			1				
L_{CCA_DL}			7				
W_{CCA_DL}		ms	$T_{Evaluate_in_SSB,CCA}$ NOTE 9				
EPRE ratio of PDCCH DMRS to SSS		dB	4				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0				
EPRE ratio of PBCH DMRS to SSS		dB	0				
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1,2	dB	1	[-7]	[-15]	[-4.5]	1
SNR on other channels and signals	Config 1,2	dB	1				
N_{oc}	Config 1,2	dBm/SCS	-95				
Propagation condition			TDL-C 300ns 100Hz				

NOTE 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in slots with RMC burst transmission and is not transmitted during muted slots or during DBT windows.
NOTE 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
NOTE 3: SNR levels correspond to the signal to noise ratio over the transmitted SSS REs during DBT windows.
NOTE 4: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in Figure A.10.3.1.2.1-1.
Note 5: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4 RX on all bands, the SNR during T3 and T4 is modified as specified in clause A.3.6.
NOTE 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
NOTE 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
NOTE 8: For UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.
NOTE 9: As defined in Table 8.1A.2.2-1.

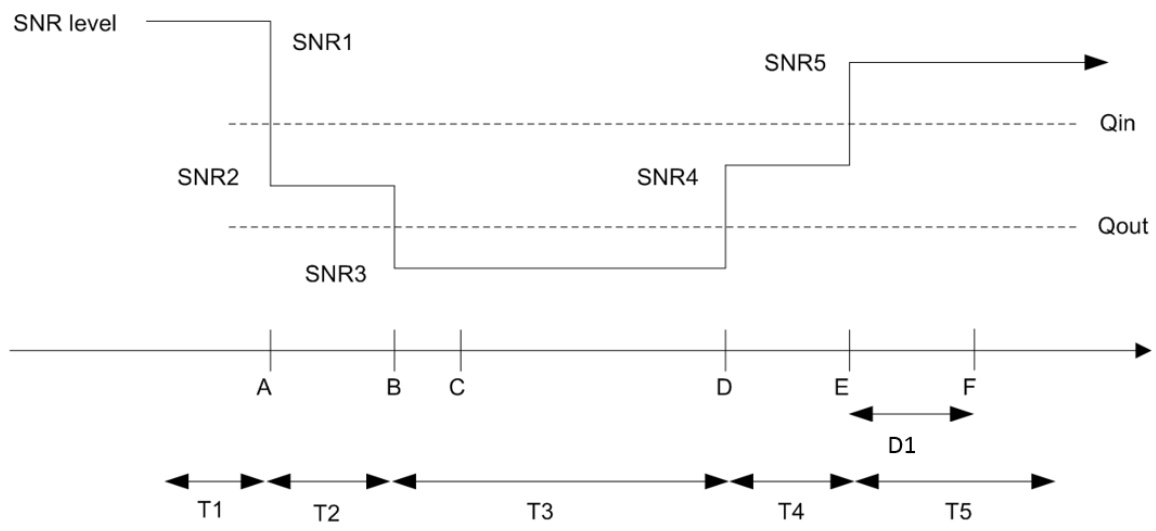

Figure A.10.3.1.2.1-1: SNR variation for in-sync testing.

A.10.3.1.3.2 Test requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90%.

A.10.3.1.4 Radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in DRX mode

A.10.3.1.4.1 Test purpose and environment

A.10.3.1.4.2 Test requirements

A.10.3.1.5 Radio link monitoring in-sync test for PSCell configured with SSB-based RLM RS in DRX mode

A.10.3.1.5.1 Test purpose and environment

A.10.3.1.5.2 Test requirements

A.10.3.2 Interruption

A.10.3.2.1 E-UTRAN – NR interruptions during SCell operations with CCA

A.10.3.2.1.1 Test Purpose and Environment

The purpose of this test is to verify E-UTRAN PCell and NR PSCell interruptions during Scell operations on an NR SCC with CCA, This test will verify the interruption requirements for E-UTRAN PCell and NR PSCell in EN-DC specified in TS 38.133 clause 8.2.1 and 8.3A. Supported test configurations are shown in table A.10.3.2.1.1-1.

The general test parameters and NR cell specific test parameters are given in Table A.10.3.2.1.1-2 and A.10.3.2.1.1-3 below. The E-UTRAN cell specific test parameters are provided in Table A.3.7.2.1-1. In the test there are three cells: Cell1, Cell2 and Cell3. Cell1 is LTE PCell, Cell2 and Cell3 is NR PSCell and NR SCell. Both of cell 2 and cell 3 are subject to CCA. The test consists of five time periods, with duration of T1, T2, T3, T4 and T5. Prior to the start of the time duration T1, the UE is connected to Cell1 and Cell2. Throughout the test, the LTE PCell and NR PSCell are continuously scheduled in DL. The power of signals on cell 1,2 and 3 is not modified during the test.

Prior to T1, a connection is started with cell 2 as the PSCell, and measurements of cell 3 are configured with gap pattern 0, such that cell 3 is reported. This ensures that cell 3 is known at the start of time period T1 and is not itself part of the tested requirement.

The point in time at which the RRC message implying SCell addition is received at the UE antenna connector, defines the start of time period T1. Measurement gap pattern 0 shall be stopped when the SCell is configured.

The point in time at which the RRC message implying SCell addition is received at the UE antenna connector, defines the start of time period T1.

The point in time at which the MAC-CE message implying SCell activation is received at the UE antenna connector, defines the start of time period T2.

The point in time at which the MAC-CE message implying SCell deactivation is received at the UE antenna connector, defines the start of time period T3.

The point in time at which deactivation delay requirement in section 8.3A are satisfied defines the start of time period T4

The point in time at which the RRC message implying SCell release is received at the UE antenna connector, defines the start of time period T5.

Table A.10.3.2.1.1-1: Interruptions during measurements on deactivated NR SCC supported test configurations

Config	Description
1	LTE FDD NR without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	LTE TDD NR without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.10.3.2.1.1-2: General test parameters for Interruptions during measurements on deactivated NR SCC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2, 3	One is E-UTRAN RF channel and the other two are NR RF channels
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Configured PSCell		Cell2	PSCell on NR RF channel number 2.
Configured deactivated SCell		Cell3	Deactivated SCell on NR RF channel number 3.
CP length		Normal	Applicable to Cell1, Cell2 and Cell3
DRX		OFF	
Measurement gap pattern Id		OFF	
SCell measurement cycle (measCycleSCell)	ms	160	
T1	s	<10	
T2	s	<10	

T3	s	<10	
T4	s	<10	
T5	s	<10	

Table A.10.3.2.1.1-3: NR cell specific test parameters for Interruptions during measurements on deactivated NR SCC

Parameter		Unit	Cell2					Cell3				
			T1	T2	T3	T4	T5	T1	T2	T3	T4	T5
TDD configuration	Config 1,2		TDDConf.1.1 CCA					TDDConf.1.1 CCA				
$BW_{channel}$	Config 1,2	MHz	40: $N_{RB,c}$ = 106					40: $N_{RB,c}$ = 106				
DL CCA model	Config 1,2		As specified in clause A.3.20.2.1					As specified in clause A.3.20.2.1				
DL CCA probability for semi-static channel access[Note6,8]	P_{CCA_DL}		0.9375					0.9375				
DL CCA probability for dynamic channel access[Note7,8]	$P_{CCA_DL_1}$		0.75					0.75				
	$P_{CCA_DL_2}$		0.75					0.75				
UL CCA model	Config 1,2		As specified in clause A.3.20.2.2					---				
UL CCA probability for semi-static channel access	P_{CCA_UL}		0.87					---				
UL CCA probability for dynamic channel access	P_{CCA_UL}		0.75					---				
Initial BWP Configuration	Config 1,2		DLBWP.0.1					DLBWP.0.1				
Dedicated DL BWP Configuration	Config 1,2		DLBWP.1.1					DLBWP.1.1				
Initial UL BWP Configuration	Config 1,2		ULBWP.0.1					ULBWP.0.1				
Dedicated UL BWP Configuration	Config 1,2		ULBWP.1.1					ULBWP.1.1				
PDSCH reference meassurement channel	Config 1,2		SR.1.1 CCA					-				
RMSI CORESET Parameters	Config 1,2		CR.1.1 CCA					CR.1.1 CCA				
PDCCH CORESET Parameters	Config 1,2		CCR.1.1 CCA					CCR.1.1 CCA				
TRS configuration	Config 1,2		TRS.1.2 TDD					TRS.1.2 TDD				
OCNG Patterns			OP.1					OP.1				
SSB configuration for semi-static channel access[Note6,8]	Config 1,2		SSB.1 CCA					SSB.1 CCA				
SSB configuration for dynamic channel access[Note7,8]	Config 1,2		SSB.2 CCA					SSB.2 CCA				
SMTC Configuration	Config 1,2		SMTC.1					SMTC.1				
DBT window configuration	Config 1,2		DBT.1					DBT.1				
TCI state			TCI.State.0					TCI.State.0				
Correlation Matrix and Antenna Configuration			1x2 Low					1x2 Low				
EPRE ratio of PSS to SSS		dB	0					0				
EPRE ratio of PBCH DMRS to SSS												
EPRE ratio of PBCH to PBCH DMRS												
EPRE ratio of PDCCH DMRS to SSS												
EPRE ratio of PDCCH to PDCCH DMRS												
EPRE ratio of PDSCH DMRS to SSS												
EPRE ratio of PDSCH to PDSCH												
EPRE ratio of OCNG DMRS to SSS(Note 1)												
EPRE ratio of OCNG to OCNG DMRS (Note 1)												
N_{oc}[Note 2]		dBm/15 kHz	-104					-104				

SS-RSRP Note 3		dBm/15 kHz	-87	-87
$\hat{E}_s/I_{ot}$		dB	17	17
$\hat{E}_s/N_{oc}$		dB	17	17
Io Note3	Config 1,2	dBm/38.16MHz	-52.86	-52.86
Time offset to Cell1 Note 4		ms	3	3
Time offset to Cell2 Note 5		µs	-	3
Propagation Condition			AWGN	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols in slots with downlink transmission bursts. OCNG is not transmitted during muted slots or during DBT windows.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modeled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselvess.
Note 4: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell at the UE antenna connector including time alignment error between the two cells
Note 5: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.
Note 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 8: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

A.10.3.2.1.2 Test Requirements

The UE shall meet the interruption requirements for SCell addition on both the victim PSCC in clause 8.2.1 and the vicitim LTE PCell in clause 7.32 of [15] during time T1

The UE shall meet the interruption requirements for SCell activation on both the victim PSCell in clause 8.2.1 and the vicitim LTE PCell in clause 7.32 of [15] during time T2. There shall be a single interruption with time window as specified in clause 8.3A.2

The UE shall meet the interruption requirements for SCell deactivation on both the victim PSCell in clause 8.2.1 and the vicitim LTE PCell in clause 7.32 of [15] during time T3. There shall be a single interruption with time window as specified in clause 8.3A,3

The UE shall meet the interruption requirements for deactivated SCell measurements on both the victim PSCell in clause 8.2.1 and the vicitim LTE PCell in clause 7.32 of [15] during time T43. The interruptions shall be within the time window as specified in clause 8.3A,3

The UE shall meet the interruption requirements for SCell release on both the victim PSCell in clause 8.2.1 and the vicitim LTE PCell in clause 7.32 of [15] during time T5.

The rate of correct events observed during repeated tests shall be at least 90%.

A.10.3.3 SCell activation and deactivation delay

A.10.3.3.1 SCell Activation and Deactivation of known NR SCell with NR PSCell and NR SCell under CCA, 160 ms SCell measurement cycle

A.10.3.3.1.1 Test Purpose and Environment

The purpose of this test is to verify that SCell activation and deactivation delays for NR SCell, with NR PSCell and NR SCell both under CCA, are within the requirements stated in clause 8.3A, when the SCell is known by the UE at the time of activation and the configured SCell measurement cycle is 160 ms.

The supported test configurations are shown in Table A.10.3.3.1.1-1.

The test parameters are given in Table A.10.3.3.1.1-2 and cell-specific parameters for NR cells are provided in Table A.10.3.3.1.1-3 below. Cell-specific parameters for EUTRA PCell are provided in clause A.3.7.2.1.

The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are three carriers, each with one cell: Cell 1 (PCell) on radio channel 1 (PCC) in E-UTRA, Cell 2 (PSCell) on radio channel 2 (PSCC) in NR, and Cell3 (SCell) on radio channel 3 (SCC) in NR. Before the test starts the UE is connected to Cell 1 and Cell 2, but is not aware of Cell 3, as the UE is only monitoring PCC and PSCC. The UE shall be continuously scheduled in the PCell and PSCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 3) becomes configured on radio channel 2. The UE now starts monitoring the SCC. At the end of T1, the test equipment sends a MAC message for activation of the SCell.

The point in time at which the MAC message is received at the UE antenna connector, in a slot # denoted *m*, defines the start of time period T2. The UE shall be able to report a valid CSI in PSCell for the activated SCell at latest in slot $m + (T_{HARQ} + T_{activation_time_withCCA} + T_{CSI_Reporting_withCCA})$/NR_slot_length, as defined in clause 8.3A.2. The UE shall start reporting CSI in PSCell in first available uplink resource for CSI reporting after at least one CSI-RS transmission occasion for channel measurement and reporting following slot $m + \frac{T_{HARQ}+3ms}{\text{NR slot length}}$ and shall report CQI index 0 (out-of-range) until the SCell activation has been completed. Any PSCell interruption shall fall within the time window specified in clause 8.3A.2.

The point in time at which the MAC message is received by at the UE antenna connector, in a slot # denoted *n*, defines the start of time period T3. The UE shall complete the activation at latest in slot $n + \frac{T_{HARQ}+3ms}{\text{NR slot length}}$. Any PSCell interruption shall fall within the time window specified in clause 8.3A.3.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PSCell during activation and deactivation of SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received, while taking into account CCA failures on SCC.

The test equipment verifies the deactivation time by counting the slots from the time when the SCell deactivation command is sent until CQI reporting for SCell is discontinued.

Table A.10.3.3.1.1-1: Supported test configurations for SCell Activation and Deactivation of known NR SCell with NR PSCell and SCell under CCA, 160 ms SCell measurement cycle

Configuration	Description
1	PCC: LTE FDD duplex mode; With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode; With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	PCC: LTE TDD duplex mode; With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode; With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.10.3.3.1.1-2: General test parameters for known SCell activation case with NR PSCell and SCell under CCA, 160 ms SCell measurement cycle

Parameter	Unit	Value	Comment
RF Channel Number		1,2,3	Three radio channels (1, 2, 3) are used for this test
Active PCell		Cell 1	Primary cell on E-UTRAN RF channel number 1.

Active PSCell		Cell 2	Primary secondary cell on NR RF channel number 2.
Configured deactivated SCell		Cell 3	Configured deactivated secondary cell on NR RF channel number 3
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
CQI/PMI periodicity and offset configuration index		0	CQI reporting for SCell every second subframe
SCell measurement cycle (measCycleSCell)	ms	160	
Cell 3 timing offset to Cell 2	µs	0	
Time alignment error between Cell 3 and Cell 2	µs	≤ TAE as specified in TS 38.104 [13] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
T1	s	7	During this time PCell and PSCell shall be known and the SCell configured and detected.
T2	s	1	During this time the UE shall activate the SCell.
T3	s	1	During this time the UE shall deactivate the SCell.
T_{HARQ}	ms	k_1×NR slot length	k_1 is a number of slots and is indicated by the PDSCH-to-HARQ-timing-indicator field in the DCI format, if present, or provided by *dl-DataToUL-ACK*, the value of k should be the minimum value defined in TS 38.213 [3] depends on UE's capability
$T_{CSI_Reporting}$	ms	$10 + 5 \cdot 2^{\mu_{DL}}$	The delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting (clause 5.2.2.5 in TS 38.214) and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2] μ_{DL} is the subcarrier spacing configuration for DL

Table A.10.3.3.1.1-3: Cell specific test parameters for known SCell activation case with NR PSCell and SCell under CCA, 160 ms SCell measurement cycle

Parameter		Unit	Cell 2			Cell 3		
			T1	T2	T3	T1	T2	T3
Duplex mode	Config 1,2		TDD			TDD		
TDD configuration	Config 1,2		TDDConf.1.1 CCA			TDDConf.1.1 CCA		
$BW_{channel}$	Config 1,2	MHz	40: $N_{RB,c}$ = 106			40: $N_{RB,c}$ = 106		
DL CCA model			As specified in clause A.3.26.2.1			As specified in clause A.3.26.2.1		
UL CCA model			As specified in clause A.3.26.2.2			As specified in clause A.3.26.2.2		
DL CCA probability for semi-static channel access[Note5,7]	P_{CCA_DL}		0.9375			0.9375		
DL CCA probability for dynamic channel access[Note6,7]	$P_{CCA_DL_1}$		0.75			0.75		
	$P_{CCA_DL_2}$		0.75			0.75		
UL CCA probability for semi-static channel access	P_{CCA_UL}		0.87			0.87		
UL CCA probability for dynamic channel access	P_{CCA_UL}		0.75			0.75		
L_{CCA_DL} [Note 8]			2			2		

W_{CCA_DL} Note 8			$T_{activation_time_withCCA}$	$T_{activation_time_withCCA}$
Initial downlink BWP configuration			DLBWP.0.2	DLBWP.0.2
Initial uplink BWP configuration			ULBWP.0.1	ULBWP.0.1
Dedicated downlink BWP configuration			DLBWP.0.2	DLBWP.0.2
Dedicated uplink BWP configuration			ULBWP.0.1	ULBWP.0.1
TCI state			TCI.State.0	TCI.State.0
TRS Configuration	Config 1,2		TRS.1.2 TDD	TRS.1.2 TDD
PDSCH Reference measurement channel	Config 1,2		SR.1.1 CCA	SR.1.1 CCA
Dedicated CORESET parameters	Config 1,2		CCR.1.3 CCA	CCR.1.3 CCA
RMSI CORESET parameters	Config 1,2		CR.1.1 CCA	CR.1.1 CCA
OCNG Patterns Note1			OP.1	OP.1
SSB Configuration for semi-static channel access Note5,7	Config 1,2		SSB.1 CCA	SSB.1 CCA
SSB Configuration for dynamic channel access Note6,7	Config 1,2		SSB.2 CCA	SSB.2 CCA
SMTC configuration			SMTC.1	SMTC.1
DBT window configuration			DBT.1	DBT.1
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS Note1				
EPRE ratio of OCNG to OCNG DMRS Note1				
N_{oc} Note2	Config 1,2	dBm/15kHz	-104	-104
N_{oc} Note2	Config 1,2	dBm/SCS	-101	-101
$\hat{E}_s/I_{ot}$		dB	17	17
$\hat{E}_s/N_{oc}$		dB	17	17
SS-RSRP Note3	Config 1,2	dBm/SCS	-84	-84
Io Note3	Config 1,2	dBm/ 38.16MHz	-52.87	-52.87
Propagation condition		-	AWGN	

Note 1: OCNG shall be used such that resources in the cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols in slots with downlink transmission bursts. OCNG is not transmitted during muted slots or during DBT windows.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.
Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 7: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.
Note 8: As specified in clause 8.3A for $L_{1,max}$, $L_{2,1,max}$, $L_{2,2,max}$, $L_{3,1,max}$, and $L_{3,2,max}$

A.10.3.3.1.2 Test Requirements

During T2, starting after at least one CSI-RS transmission occasion for channel measurement and reporting from the slot specified in clause 4.3 of TS 38.213 [3] and until the UE has completed the SCell activation, the UE shall report out of range if the UE has available uplink resources to report CQI for the SCell.

During T2, the UE shall send the first valid CSI report (non-zero CQI) for the SCell in first available uplink resource for CSI reporting no later than slot m + (T_{HARQ}+ $T_{activation_time_withCCA}$ + $T_{CSI_Reporting_withCCA}$)/NR_slot_length, where $T_{activation_time_withCCA} = T_{FirstSSB} + L_1*T_{rs}$ + 5ms, as specified in clause 8.3A.2.

During T3, the UE shall stop sending CSI reports for SCell at latest in slot $n + \frac{T_{HARQ}+3ms}{NR\ slot\ length}$, as defined in clause 8.3A.3.

During T2, interruption on PSCell shall not occur outside slot m +1+$\frac{T_{HARQ}}{NR\ slot\ length}$ to slot m +1+$\frac{T_{HARQ}+3+T_X}{NR\ slot\ length}$ with $T_X = T_{FirstSSB.}$

During T3, interruption on PSCell shall not occur outside slot n +1+T_{HARQ}/NR_slot_length to slot n+1+(T_{HARQ} +3ms)/NR_slot_length.

The interruption on PSCell shall not be more than specified for EN-DC in clause 8.2.1.2.4.

The rate of correctly observed SCell activation delays and SCell deactivation delays shall for repeated tests be at least 90%.

A.10.3.3.2 SCell Activation and Deactivation of known NR SCell with NR PSCell and NR SCell under CCA, 640 ms SCell measurement cycle

A.10.3.3.2.1 Test Purpose and Environment

The purpose of this test is to verify that SCell activation and deactivation delays for NR SCell, with NR PSCell and NR SCell both under CCA, are within the requirements stated in clause 8.3A, when the SCell is known by the UE at the time of activation and the configured SCell measurement cycle is 640 ms.

The supported test configurations are same as in Table A.10.3.3.1.1-1 above.

The test parameters are same as in Table A.10.3.3.1.1-2 above, except for parameters listed below in Table A.10.3.3.2.1-1. The cell-specific parameters are same as in Table A.10.3.3.1.1-3 above.

The test execution is the same as described in clause A.10.3.3.1 above.

Table A.10.3.3.2.1-1: General test parameters for known NR SCell activation with NR PSCell and SCell under CCA, 640 ms SCell measurement cycle

Parameter	Unit	Value	Comment
SCell measurement cycle (measCycleSCell)	ms	640	

A.10.3.3.2.2 Test Requirements

During T2, starting after at least one CSI-RS transmission occasion for channel measurement and reporting from the slot specified in clause 4.3 of TS 38.213 [3] and until the UE has completed the SCell activation, the UE shall report out of range if the UE has available uplink resources to report CQI for the SCell.

During T2, the UE shall send the first valid CSI report (non-zero CQI) for the SCell in first available uplink resource for CSI reporting no later than slot m + (T_{HARQ}+ $T_{activation_time_withCCA}$ + $T_{CSI_reporting_withCCA}$)/NR_slot_length, where $T_{activation_time_withCCA} = T_{FirstSSB_MAX} + L_{2,1}*T_{SMTC_MAX} + (1 + L_{2,2})*T_{rs}$ + 5ms, as specified in clause 8.3A.2.

During T3, the UE shall stop sending CSI reports for SCell at latest in slot $n + \frac{T_{HARQ}+3ms}{NR\ slot\ length}$, as defined in clause 8.3A.3.

During T2, interruption on PSCell shall not occur outside slot m +1+$\frac{T_{HARQ}}{NR\ slot\ length}$ to slot m +1+$\frac{T_{HARQ}+3+T_X}{NR\ slot\ length}$ with $T_X = T_{FirstSSB_MAX} + L_{2,1}* T_{SMTC_MAX.}$

During T3, interruption on PSCell shall not occur outside slot n +1+T_{HARQ}/NR_slot_length to slot n+1+(T_{HARQ} +3ms)/NR_slot_length.

The interruption on PSCell shall not be more than specified for EN-DC in clause 8.2.1.2.4.

The rate of correctly observed SCell activation delays and SCell deactivation delays shall for repeated tests be at least 90%.

A.10.3.3.3 SCell Activation and Deactivation of unknown NR SCell with NR PSCell and NR SCell under CCA

A.10.3.3.3.1 Test Purpose and Environment

The purpose of this test is to verify that SCell activation and deactivation delays for NR SCell, with NR PSCell and NR SCell both under CCA, are within the requirements stated in clause 8.3A, when the SCell is unknown to the UE at the time of activation.

The supported test configurations are same as in Table A.10.3.3.1.1-1 above.

The test parameters are same as in Table A.10.3.3.1.1-2 above, except for parameters listed below in Table A.10.3.3.3.1-1. The cell-specific parameters are same as in Table A.10.3.3.1.1-3 above.

The test execution is the same as described in clause A.10.3.3.1 above.

Table A.10.3.3.3.1-1: General test parameters for unknown NR SCell activation with NR PSCell and SCell under CCA

Parameter	Unit	Value	Comment
T1	s	0.1	During this time period PCell and PSCell shall be known and the SCell configured, but not detected.

A.10.3.3.3.2 Test Requirements

During T2, starting after at least one CSI-RS transmission occasion for channel measurement and reporting from the slot specified in clause 4.3 of TS 38.213 [3] and until the UE has completed the SCell activation, the UE shall report out of range if the UE has available uplink resources to report CQI for the SCell.

During T2, the UE shall send the first valid CSI report (non-zero CQI) for the SCell in first available uplink resource for CSI reporting no later than slot m + (T_{HARQ}+ $T_{activation_time_withCCA}$ + $T_{CSI_reporting_withCCA}$)/NR_slot_length, where $T_{activation_time_withCCA}$ = $T_{FirstSSB_MAX}$ + (1 + $L_{3,1}$)*T_{SMTC_MAX} + (2 + $L_{3,2}$)*T_{rs} + 5ms, as specified in clause 8.3A.2.

During T3, the UE shall stop sending CSI reports for SCell at latest in slot $n + \frac{T_{HARQ}+3ms}{NR\ slot\ length}$, as defined in clause 8.3A.3.

During T2, interruption on PSCell shall not occur outside slot m +1+$\frac{T_{HARQ}}{NR\ slot\ length}$ to slot m +1+$\frac{T_{HARQ}+3+T_X}{NR\ slot\ length}$ with T_X = $T_{FirstSSB_MAX}$ + $L_{3,1}$* T_{SMTC_MAX}.

During T3, interruption on PSCell shall not occur outside slot n +1+T_{HARQ}/NR_slot_length to slot n+1+(T_{HARQ} +3ms)/NR_slot_length.

The interruption on PSCell shall not be more than specified for EN-DC in clause 8.2.1.2.4.

The rate of correctly observed SCell activation delays and SCell deactivation delays shall for repeated tests be at least 90%.

A.10.3.4 Beam failure detection and link recovery procedures

A.10.3.4.1 EN-DC Beam Failure Detection and Link Recovery Test for FR1 PSCell configured with SSB-based BFD and LR in non-DRX mode

A.10.3.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving PSCell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the PSCell, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5A.

The test parameters are given in Tables A.10.3.4.1.1-1, A.10.3.4.1.1-2, and A.10.3.4.1.1-3 below. There are two cells, cell 1 is the E-UTRAN PCell, and cell 2 is the PSCell which operates on a carrier frequency with CCA and transmits SSBs in DBT windows according to DL CCA model. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.10.3.4.1.1-1 shows the variation of the downlink SNR of the PCell and the SNR of the SSB in set q_0 in the active PSCell to emulate SSB based beam failure. Figure A.10.3.4.1.1-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 2 ms. The UE transmits the reporting according to UL CCA model. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40 ms) in test 1.

Table A.10.3.4.1.1-1: Supported test configurations for FR1 PSCell with CCA

Configuration	Description
1	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.10.3.4.1.1-2: General test parameters for FR1 PSCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Value	Comment
			Test 1	
Active E-UTRA PCell			Cell 1	
E-UTRA RF Channel Number			1	
Active PSCell			Cell 2	
RF Channel Number			2	
DL CCA model			As specified in A.3.26.2.1	
UL CCA model			As specified in A.3.26.2.2	
Duplex mode	Config 1, 2		TDD	
BWchannel	Config 1, 2	MHz	40: NRB,c = 106	
DL initial BWP configuration	Config 1, 2		DLBWP.0.1	
DL dedicated BWP configuration	Config 1, 2		DLBWP.1.1	
UL initial BWP configuration	Config 1, 2		ULBWP.0.1	

UL dedicated BWP configuration	Config 1, 2		ULBWP.1.1	
TDD configuration	Config 1, 2		TDDConf.1.1 CCA	
CORESET Reference Channel	Config 1, 2		CR.1.1 CCA	
SSB Configuration	Config 1, 2		SSB.3 CCA for semi-static channel access SSB.4 CCA for dynamic channel access	
DBT Window Configuration	Config 1, 2		DBT.1	
PDSCH/PDCCH subcarrier spacing	Config 1, 2		30 KHz	
PRACH Configuration	Config 1, 2		Table A.3.8.2.2-1	
SSB Index assigned as BFD RS (q_0)			0	
SSB Index assigned as CBD RS (q_1)			1	
OCNG parameters			OP.1	
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			OFF	
Gap pattern ID			gp0	
gapOffset			0	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies

				the value 0. (Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1, 2	dBm/SCS kHz	-95	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer			pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting	Config 1, 2		CSI-RS.2.1 TDD	
CSI-RS for tracking	Config 1, 2		TRS.1.2 TDD	
SSB Index assigned as RLM RS			0,1	
T310 timer		ms	1000	
N310			2	
T1		s	0.2	During this time the the UE shall be fully synchronized to cell 1
T2		s	0.93	
T3		s	0.52	
T4		s	0	
T5		s	0.45	
D1		s	0.41	
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts. Note 3: E-UTRAN is in non-DRX mode under test.				

Table A.10.3.4.1.1-3: Cell specific test parameters for FR1 PSCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
DL CCA probability $P_{CCA,DL}$	Note 10, 12		1.0	0.9375	0.9375	0.9375	0.9375
	Note 11, 12		1.0/1.0	0.75/0.75	0.75/0.75	0.75/0.75	0.75/0.75
UL CCA probability $P_{CCA,UL}$			1.0	1.0	1.0	1.0	1.0
L_{CCA_DL}			N/A	7			
W_{CCA_DL}		ms	N/A	$T_{Evaluate_CBD_SSB_CCA}$ Note 13			
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q_0	Config 1, 2	dB	5	-3	-12	-12	-12
SNR_SSB of set q_1	Config 1, 2	dB	-10	-10	10	10	10
SSB_RP of set q_1	Config 1, 2	dBm/SCS kHz	-105	-105	-85	-85	-85

N_{oc}	Config 1, 2	dBm/15 KHz	-98
Propagation condition			TDL-C 300ns 100Hz

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the transmitted SSS REs during DBT window.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6A.
Note 10: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 11: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2}.
Note 12: For UE supporting both semi-static and dynamic cannel access, the UE can be tested under dynamic channel occupancy only.
Note 13: As defined in Table 8.5A.5.2-1.

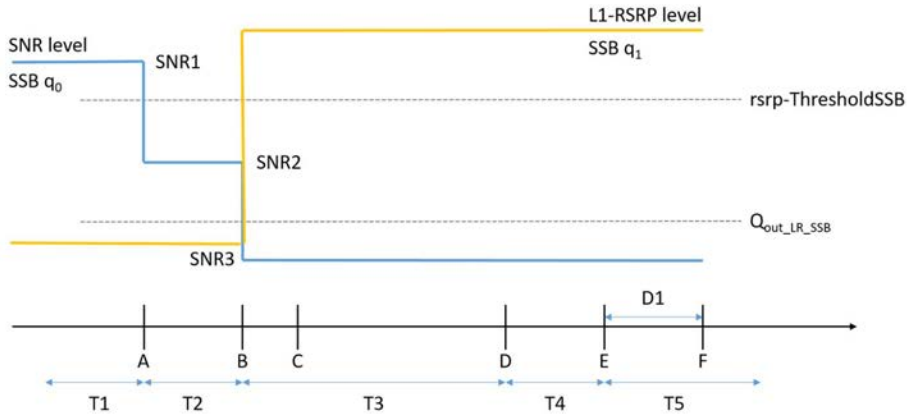

Figure A.10.3.4.1.1-1: SNR and L1-RSRP variation SSB for SSB-based beam failure detection and link recovery testing in non-DRX mode

A.10.3.4.1.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 410 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.10.3.4.2 EN-DC Beam Failure Detection and Link Recovery Test for FR1 PSCell configured with SSB-based BFD and LR in DRX mode

A.10.3.4.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving PSCell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the PSCell, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5A.

The test parameters are given in Tables A.10.3.4.2.1-1, A.10.3.4.2.1-2, and A.4.5.5.2.1-3 below. There are two cells, cell 1 is the E-UTRAN PCell, and cell 2 is the PSCell which operates on a carrier frequency with CCA and transmits SSBs in DBT windows according to DL CCA model, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.10.3.4.2.1-1 shows the variation of the downlink SNR of the PCell and the SNR of the SSB in set q_0 in the active PSCell to emulate SSB based beam failure. Figure A.10.3.4.2.1-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 2 ms. The UE transmits the reporting according to UL CCA model. In the test, DRX configuration is enabled in PSCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.10.3.4.2.1-1: Supported test configurations for FR1 PSCell with CCA

Configuration	Description
1	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.10.3.4.2.1-2: General test parameters for FR1 PSCell for SSB-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Value	Comment
			Test 1	
Active E-UTRA PCell			Cell 1	
E-UTRA RF Channel Number			1	
Active PSCell			Cell 2	
RF Channel Number			2	
DL CCA model			As specified in A.3.26.2.1	
UL CCA model			As specified in A.3.26.2.2	
Duplex mode	Config 1, 2		TDD	
BWchannel	Config 1, 2	MHz	40: NRB,c = 106	

DL initial BWP configuration	Config 1, 2		DLBWP.0.1	
DL dedicated BWP configuration	Config 1, 2		DLBWP.1.1	
UL initial BWP configuration	Config 1, 2		ULBWP.0.1	
UL dedicated BWP configuration	Config 1, 2		ULBWP.1.1	
TDD configuration	Config 1, 2		TDDConf.1.1 CCA	
CORESET Reference Channel	Config 1, 2		CR.1.1 CCA	
SSB Configuration	Config 1, 2		SSB.3 CCA for semi-static channel access SSB.4 CCA for dynamic channel access	
DBT Window Configuration	Config 1, 2		DBT.1	
PDSCH/PDCCH subcarrier spacing	Config 1, 2		30 KHz	
PRACH Configuration	Config 1, 2		Table A.3.8.2.2-1	
SSB Index assigned as BFD RS (q_0)			0	
SSB Index assigned as CBD RS (q_1)			1	
OCNG parameters			OP.1	
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	

DRX			DRX.7	A.3.3.7
Gap pattern ID			N.A.	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1, 2	dBm/SCS kHz	-95	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer			pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting	Config 1, 2		CSI-RS.2.1 TDD	
CSI-RS for tracking	Config 1, 2		TRS.1.2 TDD	
SSB Index assigned as RLM RS			0,1	
T310 timer		ms	1000	
N310			2	
T1		s	1	During this time the the UE shall be fully synchronized to cell 1
T2		s	9.01	
T3		s	5.16	
T4		s	0	
T5		s	3.89	
D1		s	3.85	
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts. Note 3: E-UTRAN is in non-DRX mode under test.				

Table A.10.3.4.2.1-3: Cell specific test parameters for FR1 PSCell for SSB-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
DL CCA probability $P_{CCA,DL}$	Note 10, 12		1.0	0.9375	0.9375	0.9375	0.9375
	Note 11, 12		1.0/1.0	0.75/0.75	0.75/0.75	0.75/0.75	0.75/0.75
UL CCA probability $P_{CCA,UL}$			1.0	1.0	1.0	1.0	1.0
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q_0	Config 1, 2	dB	5	-3	-12	-12	-12
SNR_SSB of set q_1	Config 1, 2	dB	-10	-10	10	10	10

SSB_RP of set q_1	Config 1, 2	dBm/SCS kHz	-105	-105	-85	-85	-85
N_{oc}	Config 1, 2	dBm/15 KHz	-98				
Propagation condition			TDL-C 300ns 100Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the transmitted SSS REs during DBT window.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6A.
Note 10: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 11: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2}.
Note 12: For UE supporting both semi-static and dynamic cannel access, the UE can be tested under dynamic channel occupancy only.

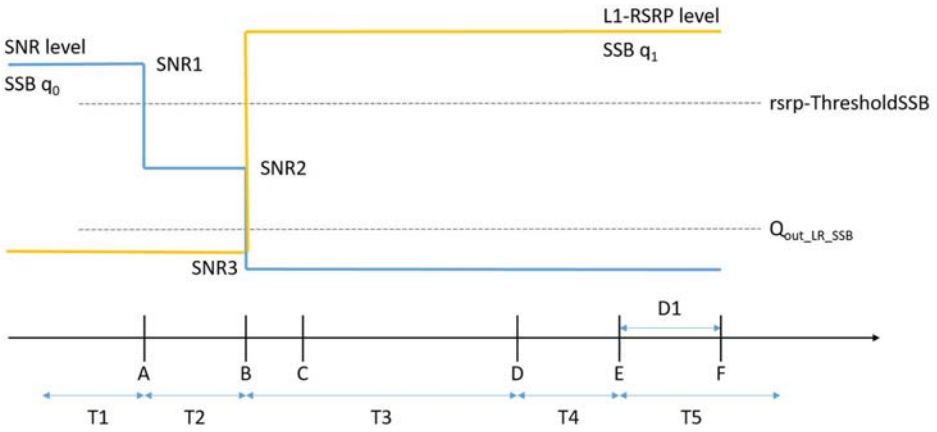

Figure A.10.3.4.2.1-1: SNR and L1-RSRP variation for SSB-based beam failure detection and link recovery testing in DRX mode

A.10.3.4.2.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 3850 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.10.3.5 Active BWP switching

A.10.3.5.1 UL active BWP switch delay with consistent UL LBT failure on PSCell subject to UL CCA in EN-DC

A.10.3.5.1.1 Test Purpose and Environment

The purpose of this test is to verify the UL BWP switch delay requirement defined in clause 8.6.4.

The supported test configurations are shown in Table A.10.3.5.1.1-1.

The test scenario comprises of one E-UTRA PCell (Cell 1), and one NR PSCell (Cell 2) as given in A.10.3.5.1.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell is specified in Table A.10.3.5.1.1-2. SRS configuration used in the test is specified in Table A.10.3.5.1.1-4.

The UE shall be configured with PRACH configuration on UL BWP on which the UE shall switch after the consistent UL LBT failure detection.

Before the test starts,

- UE is connected to Cell 1 on radio channel 1 and Cell 2 on radio channel 2.
- UE is configured with 2 different UE-specific downlink and uplink bandwidth parts on Cell 2: DL BWP-1, DL BWP-2, UL BWP-1 and UL BWP-2 before starting the test. DL BWP-1 and DL BWP-2 always include bandwidth of the initial DL BWP and SSB. UL BWP-1 and UL BWP-2 always include bandwidth of the SRS.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is DL BWP-1.
- UE is indicated in *firstActiveUplinkBWP-Id* that the active UL BWP is UL BWP-1.
- UE is configured with *LBT-FailureRecoveryConfig* parameters for Cell 2.

The cell has constant signal levels throughout the test. The test consists of 2 successive time periods, with durations of T1 and T2, respectively.

During T1,

- Time period T1 starts when the UE has received the SRS configuration for periodic SRS transmission on active UL BWP-1.
- The UE shall perform UL CCA before SRS transmission.
- The parameter UL CCA probability P_{CCA} is set to 0 during T1. This requires the test system to set energy level above the detection level during portion of the UL slot where the UE performs UL CCA. This in turn forces the UE to fail the UL CCA. The UE consistently fails UL CCA during T1 and is therefore unable to transmit SRS.

During T2,

- T2 starts when the UE detects consistent UL LBT failures i.e. when total number of UL LBT failures in Cell 2 on active UL BWP-1 exceeds *lbt-FailureInstanceMaxCount* during *lbt-FailureDetectionTimer*.

- The UE upon detected consistent UL LBT failure starts the LBT recovery mechanism, which requires the UE to switch to active UL BWP-2 in Cell 2 and to send PRACH in the active UL BWP-2.

- Staring from T2, the UE shall be able to send PRACH in the active UL BWP-2 within the delay specified in clause 8.6.4.

Table A.10.3.5.1.1-1: Supported test configurations for UL BWP switch test in EN-DC

Config	Description
1	LTE FDD, With CCA: NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
2	LTE TDD, With CCA: NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note 1: The UE is only required to be tested in one of the supported test configurations.	

Table A.10.3.5.1.1-2: General test parameters for UL BWP switch in EN-DC

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
CP length		Normal	
DRX		OFF	
lbt-FailureDetectionTimer [2]	ms	80	Parameter configured by IE: *LBT-FailureRecoveryConfig* [1]
lbt-FailureInstanceMaxCount [2]		4	Parameter configured by IE: *LBT-FailureRecoveryConfig* [1]
T1	s	0.1	During T1 consistent LBT failure is detected on active UL BWP-1
T2	s	0.1	During T2 UE sends PRACH on active UL BWP-2

Table A.10.3.5.1.1-3: NR Cell specific test parameters for UL BWP switch test in EN-DC

Parameter			Unit	Cell 2	
				T1	T2
TDD configuration		Config 1, 2		TDDConf.1.1 CCA	
$BW_{channel}$		Config 1, 2		40 MHz: $N_{RB,c}$ = 106	
DL CCA model		Config 1, 2		As specified in clause A.3.20.2.1	
UL CCA model		Config 1, 2		As specified in clause A.3.20.2.2	
Active BWP ID		Config 1, 2		1, 2	
Initial DL BWP Configuration		Config 1, 2		DLBWP.0.2 Note 4	
Active DL BWP-1 Configuration		Config 1, 2		DLBWP.1.1 Note 4	
Active DL BWP-2 Configuration		Config 1, 2		DLBWP.1.3 Note 4	
Initial UL BWP Configuration		Config 1, 2		ULBWP.0.2 Note 4	
Active UL BWP-1 Configuration		Config 1, 2		ULBWP.1.1 Note 4	
Active UL BWP-2 Configuration		Config 1, 2		ULBWP.1.3 Note 4	
PDSCH Reference measurement channel		Config 1, 2		SR.1.1 CCA	
RMSI CORESET parameters		Config 1, 2		CR.1.1 CCA	
Dedicated CORESET parameters		Config 1, 2		CCR.1.1 CCA	
OCNG Patterns		Config 1, 2		OP.1	
SSB Configuration	Semi- static channel acces	Config 1, 2		SSB.1 CCA	

	Dymamic channel acces	Config 1, 2		SSB.2 CCA	
SMTC Configuration		Config 1, 2		SMTC.1 FR1	
Correlation Matrix and Antenna Configuration		Config 1, 2		1x2 Low	
TRS Configuration		Config 1, 2		TRS.1.2 TDD	
DL CCA probability for semi-static channel access (P_{CCA_DL})		Config 1, 2		1	1
DL CCA model probability for dynamic static channel access ($P_{CCA_DL_1}$)		Config 1, 2		1	1
DL CCA model probability for dynamic static channel access ($P_{CCA_DL_2}$)		Config 1, 2		1	1
UL CCA probability (P_{CCA_UL})		Config 1, 2		0	1
PRACH configuration		Config 1, 2		N/A	Configuration #1 in Table A.3.8.2.1-1
EPRE ratio of PSS to SSS			dB	0	
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} Note 2		Config 1, 2	dBm/SCS	-101	
SS-RSRP Note 3		Config 1, 2	dBm/SCS	-84	
$\hat{E}_s/I_{ot}$		Config 1, 2	dB	17	
$\hat{E}_s/N_{oc}$		Config 1, 2	dB	17	
Io Note3		Config 1, 2	dBm/ 38.16MHz	-52.86	
Propagation Condition				AWGN	

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].
Note 5: Parameters P_{CCA_DL}, $P_{CCA_DL_1}$, $P_{CCA_DL_2}$ and P_{CCA_UL} are defined in clause A.3.20.2.
Note 6: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

Table A.10.3.5.1.1-4: Sounding Reference Symbol Configuration for UL BWP Switch Test in EN-DC

Field	Value	Comment
c-SRS	24	Frequency hopping is disabled
b-SRS	0	
b-hop	0	
freqDomainPosition	0	Frequency domain position of SRS
freqDomainShift	0	
groupOrSequenceHopping	neither	No group or sequence hopping
SRS-PeriodicityAndOffset	sl5=4 for SCS 30kHz	Once every 5 slots
pathlossReferenceRS	ssb-Index=0	SSB #0 is used for SRS path loss estimation

usage	Codebook	Codebook based UL transmission
startPosition	0	resourceMapping setting: SRS on last symbol of slot, and 1symbols for SRS without repetition.
nrofSymbols	n1	
repetitionFactor	n1	
combOffset-n2	0	transmissionComb setting
cyclicShift-n2	0	
nrofSRS-Ports	port1	Number of antenna ports used for SRS transmission
Note: For further information see clause 6.3.2 in TS 38.331 [2].		

A.10.3.5.1.2 Test Requirements

The UE capable of *bwp-SwitchingDelay type1* [2] shall start to transmit the PRACH on active UL BWP-2 of Cell 2 (PSCell) less than 21.5 ms from the beginning of time period T1.

The UE capable of *bwp-SwitchingDelay type2* [2] shall start to transmit the PRACH on active UL BWP-2 of Cell 2 (PSCell) less than 23 ms from the beginning of time period T1.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The above delay is calculated as follows:'

The active UL BWP switch delay from UL BWP-1 to UL BWP-2 can be expressed as:

$$T_{BWPswitchDelay} * T_{slot} + 1 * T_{slot} + (1 + L_3) * T_{SSB,RO} + 10 \text{ ms}$$

Where:

- $T_{BWPswitchDelay}$ = 1 ms (2 slots) and 2.5 ms (5 slots) for *bwp-SwitchingDelay* [2] *type1* and *type2* UE capabilities according to clause 8.6.4.
- T_{slot} = It is the slot length. It is 0.5 ms for 30 kHz.
- L3 = It is the number of consecutive SSB to PRACH occasion association periods during which no PRACH occasion is available for PRACH transmission due to UL CCA failure. L3= 0 during T2 since P_{CCA} = 1.
- $T_{SSB,RO}$ = 10 ms according to FR1 PRACH configuration 1.

This gives a total of 21.5 ms and 23 ms for *type1* and *type2* UE respectively.

A.10.3.5.2 DCI-based and Timer-based Active BWP Switch

A.10.3.5.2.1 E-UTRAN – NR PSCell FR1 DL active BWP switch in non-DRX in synchronous EN-DC

A.10.3.5.2.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement defined in TS38.133 clause 8.6, and interruption requirement for E-UTRA victim cell defined in TS36.133 clause 7.32.2.7. Supported test configurations are shown in Table A.10.3.5.2.1.1-1.

The test scenario comprises of one E-UTRA PCell (Cell 1), and one NR PSCell (Cell 2) as given in Table A.10.3.5.2.1.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell is specified in Table A.10.3.5.2.1.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

PDCCHs indicating new transmissions shall be sent continuously on PSCell (Cell 2) to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on Cell 2 and the time duration of T2.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), and Cell 2 (PSCell) on radio channel 2 (PSCC).
- UE is configured with 2 different UE-specific downlink bandwidth parts for PSCell, BWP-1 and BWP-2, in Cell 2 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in PSCell.
- UE is configured with a *bwp-InactivityTimer* timer value for PSCell.

All cells have constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

> Time period T1 starts when a DCI format 1_1 command for PSCell DL BWP switch, sent from the test equipment to the UE, is received at the UE side in PSCell's slot # denoted *i*. The UE shall switch its bandwidth part from BWP-1 to BWP-2.
>
> The UE shall be able to receive PDSCH at the beginning of the DL slot right after PSCell's DL slot ($i+T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the PSCell no later than at the beginning of the DL slot right after DL slot ($i+T_{BWPswitchDelay}+k1$). The UE shall be continuously scheduled on PSCell's BWP-2 starting from the beginning of the DL slot right after DL slot ($i+T_{BWPswitchDelay}$).
>
> The starting time of PCell(Cell 1) interruption due to BWP switch on PSCell shall occur within the BWP switch delay.

During T2, the test equipment won't transmit DCI format for PDSCH reception on PSCell(Cell 2).

During T3,

> The time period T3 starts from the slot #*j*, where j is the beginning slot of the DL subframe immediately after the *bwp-InactivityTimer* timer expires. The UE shall switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1.
>
> The UE shall be able to receive PDSCH at the beginning of the DL slot right after PSCell's DL slot ($j+T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the PSCell at latest at the beginning of the DL slot right after DL slot ($j+T_{BWPswitchDelay}+k1$). The UE shall be continuously scheduled on PSCell's BWP-1 starting from the beginning of the DL slot right after DL slot ($j+T_{BWPswitchDelay}$).
>
> The starting time of PCell(Cell 1) interruption due to BWP switch of PSCell shall occur within the BWP switch delay.

The test equipment verifies the DL BWP switch time in PSCell by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK is received.

The test equipment verifies that potential interruption to E-UTRA PCell is carried out in the correct time span by monitoring ACK/NACK sent in PCell during BWP switch of PSCell, respectively.

Table A.10.3.5.2.1.1-1: DL BWP switch supported test configurations

Config	Description
1	LTE FDD, With CCA: NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz

2	LTE TDD, With CCA: NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note 1: The UE is only required to be tested in one of the supported test configurations. Note 2: A UE which fulfils the requirements in test case A.10.3.5.2.2 can skip the test cases in A.10.3.5.2.1. Note 3: The UE supporting EN-DC with only NR band(s) with shared spectrum access is required to be test.	

Table A.10.3.5.2.1.1-2: General test parameters for DL BWP switch in synchronous EN-DC

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
CP length		Normal	
DRX		OFF	For both PCell and PSCell
DL CCA model		As specified in clause A.3.26.2.1	
UL CCA model		As specified in clause A.3.26.2.2	
bwp-InactivityTimer	ms	200	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell2 timing offset to cell1	µs	3	Synchronous EN-DC
T1	s	0.2	
T2	s	0.2	
T3	s	0.2	

Table A.10.3.5.2.1.1-3.: NR Cell specific test parameters for DL BWP switch in synchronous EN-DC

Parameter			Unit	Cell 2
Frequency Range				FR1
Duplex mode		Config 1,2		TDD
TDD configuration		Config 1,2		TDDConf.1.1 CCA
$BW_{channel}$		Config 1,2		40 MHz: $N_{RB,c}$ = 106
Active BWP ID				1, 2
Initial DL BWP Configuration		Config 1,2		DLBWP.0.2 Note 4
Active DL BWP-1 Configuration		Config 1,2		DLBWP.1.1 Note 4
Active DL BWP-2 Configuration		Config 1,2		DLBWP.1.3 Note 4
Initial UL BWP Configuration		Config 1,2		ULBWP.0.2 Note 4
Active UL BWP-1 Configuration		Config 1,2		ULBWP.1.1 Note 4
Active UL BWP-2 Configuration		Config 1,2		ULBWP.1.3 Note 4
PDSCH Reference measurement channel		Config 1,2		SR.1.1 CCA
RMSI CORESET parameters		Config 1,2		CR.1.1 CCA
Dedicated CORESET parameters		Config 1,2		CCR.1.1 CCA
OCNG Patterns		Config 1,2		OP.1
SSB Configuration	Semi- static channel acces	Config 1,2		SSB.1 CCA
	Dymamic channel acces	Config 1,2		SSB.2 CCA
SMTC Configuration		Config 1,2		SMTC.1
TRS Configuration		Config 1,2		TRS.1.2 TDD
DL CCA probability for semi-static channel access (P_{CCA_DL})		Config 1,2		1
DL CCA model probability for dynamic static channel access ($P_{CCA_DL_1}$)		Config 1,2		1
DL CCA model probability for dynamic static channel access ($P_{CCA_DL_2}$)		Config 1,2		1

DL CCA probability for semi-static channel access (P_{CCA_DL})	Config 1,2		1
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS (Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note 2	Config 1,2	dBm/SCS	-101
SS-RSRP Note 3	Config 1,2	dBm/SCS	-84
$\hat{E}_s/I_{ot}$	Config 1,2	dB	17
$\hat{E}_s/N_{oc}$	Config 1,2	dB	17
Io Note3	Config 1,2	dBm/38.16MHz	-59
Propagation Condition			AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for Noc to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].
Note 5: Parameters P_{CCA_DL}, $P_{CCA_DL_1}$, $P_{CCA_DL_2}$ and P_{CCA_UL} are defined in clause A.3.26.2.
Note 6: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

A.10.3.5.2.1.2 Test Requirements

During T1, the UE shall start to send the ACK for PSCell in the DL slot right after DL slot ($i+T_{BWPswitchDelay}+k1$).

During T3, the UE shall start to send the ACK for PSCell in the DL slot right after DL slot ($j+T_{BWPswitchDelay}+k1$).

Where, *k1* is the timing between DL data receiving and acknowledgement as specified in [7].

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 8.6.2-1.

All of the above test requirements shall be fulfilled in order for the observed PSCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

During T1, the start time of PCell interruption during PSCell active BWP switch shall not happen outside the BWP switch delay.

During T3, the start time of PCell interruption of during PSCell active BWP switch shall not happen outside the BWP switch delay.

The interruption of PCell shall not be longer than the interruption duration specified for active BWP switch in TS36.133 Clause 7.32.2.7.

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch interruption to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK in the DL slot right after DL slot ($i+T_{BWPswitchDelay}+k1$), ($j+T_{BWPswitchDelay}+k1$), then the UE shall use the next available uplink resource for reporting the corresponding ACK.

A.10.3.5.2.2 E-UTRAN – NR PSCell FR1 DL active BWP switch with FR1 SCell in non-DRX in synchronous EN-DC

A.10.3.5.2.2.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement defined in clause 8.6, and interruption requirements for NR victim cell defined in clause 8.2.1.2.7 and interruption requirement for E-UTRA victim cell defined in clause 7.32.2.7 of TS 36.133 [15]. Supported test configurations are shown in Table A.10.3.5.2.2.1-1.

The test scenario comprises of one E-UTRA PCell (Cell 1), one NR PSCell (Cell 2) and one NR SCell (Cell 3) as given in Table A.10.3.5.2.2.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell and SCell are specified in Table A.10.3.5.2.2.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) and SCell (Cell 3) to ensure that the UE will have ACK/NACK sending.

PDCCHs indicating new transmissions shall be sent continuously on PSCell (Cell 2) to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on Cell 2 and the time duration of T2.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), Cell 2 (PSCell) on radio channel 2 (PSCC) and Cell 3 (SCell) on radio channel 3 (SCC).
- UE is configured with 2 different UE-specific downlink bandwidth parts for PSCell, BWP-1 and BWP-2, in Cell 2 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.
- UE is configured with 1 UE-specific downlink bandwidth parts the same as initial BWP for SCell, BWP-0 in Cell 3 before starting the test.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in PSCell.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-0 in SCell.
- UE is configured with a *bwp-InactivityTimer* timer value for PSCell.

All cells have constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

Time period T1 starts when a DCI format 1_1 command for PSCell DL BWP switch, sent from the test equipment to the UE, is received at the UE side in PSCell's slot # denoted *i*. The UE shall switch its bandwidth part from BWP-1 to BWP-2.

The UE shall be able to receive PDSCH at the beginning of the DL slot right after PSCell's DL slot ($i+T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the PSCell no later than at the beginning of the DL slot right after slot ($i+T_{BWPswitchDelay}+k1$). The UE shall be continuously scheduled on PSCell's BWP-2 starting from the beginning of the DL slot right after slot ($i+T_{BWPswitchDelay}$).

PCell(Cell 1) interruption due to BWP switch on PSCell shall occur within the BWP switch delay.

SCell(Cell 3) interruption due to BWP switch on PSCell shall occur within the BWP switch delay.

During T2, the test equipment won't transmit DCI format for PDSCH reception on PSCell(Cell 2).

During T3,

The time period T3 starts from the slot #*j*, where j is the beginning slot of the DL subframe immediately after the slot wherein *bwp-InactivityTimer* timer expires. The UE shall switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1.

The UE shall be able to receive PDSCH at the beginning of the DL slot right after PSCell's DL slot ($j+T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the PSCell at latest at the beginning of the DL slot right after slot ($j+T_{BWPswitchDelay}+k1$). The UE shall be continuously scheduled on PSCell's BWP-1 starting from the beginning of the DL slot right after slot ($j+T_{BWPswitchDelay}$).

PCell(Cell 1) interruption due to BWP switch of PSCell shall occur within the BWP switch delay.

SCell(Cell 3) interruption due to BWP switch of PSCell shall occur within the BWP switch delay.

The test equipment verifies the DL BWP switch time in PSCell by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK is received.

The test equipment verifies that potential interruption to E-UTRA PCell and NR SCell is carried out in the correct time span by monitoring ACK/NACK sent in PCell and SCell during BWP switch of PSCell, respectively.

Table A.10.3.5.2.2.1-1: DL BWP switch supported test configurations

Config	Description
1	LTE FDD, With CCA: NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
2	LTE TDD, With CCA: NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: A UE which fulfils the requirements in test case A.10.3.5.2.2 can skip the test cases in A.10.3.5.2.1. Note 3: NR configuration is the same for PSCell and SCells. Note 4: The UE supporting EN-DC with only NR band(s) with shared spectrum access is required to be tested.	

Table A.10.3.5.2.2.1-2: General test parameters for DL BWP switch in synchronous EN-DC

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2, 3	Two NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
Active SCell		Cell 3	SCell on RF channel number 3.
CP length		Normal	
DRX		OFF	
DL CCA model		As specified in clause A.3.26.2.1	
UL CCA model		As specified in clause A.3.26.2.2	
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell-individual offset for cells on RF channel number 3	dB	0	Individual offset for cells on SCC.
Cell2 timing offset to cell1	µs	3	Synchronous EN-DC
Cell3 timing offset to cell2	µs	3	Synchronous cells
T1	s	0.2	
T2	s	0.2	
T3	s	0.2	

Table A.10.3.5.2.2.1-3: NR Cell specific test parameters for DL BWP switch in synchronous EN-DC

Parameter			Unit	Cell 2	Cell 3
Frequency Range				FR1	
Duplex mode		Config 1,2		TDD	
TDD configuration		Config 1,2		TDDConf.1.1 CCA	
$BW_{channel}$		Config 1,2		40 MHz: $N_{RB,c}$ = 106	
Active BWP ID				1, 2	0
Initial BWP Configuration		Config 1,2		DLBWP.0.2	DLBWP.0.2
Active BWP-0 Configuration		Config 1,2		NA	DLBWP.0.2
Active BWP-1 Configuration		Config 1,2		DLBWP.1.3	NA
Active BWP-2 Configuration		Config 1,2		DLBWP.1.1	NA
PDSCH Reference measurement channel		Config 1,2		SR.1.1 CCA	
RMSI CORESET parameters		Config 1,2		CR.1.1 CCA	
Dedicated CORESET parameters		Config 1,2		CCR.1.1 CCA	
OCNG Patterns		Config 1,2		OP.1	
SSB Configuration	Semi- static channel acces	Config 1,2		SSB.1 CCA	
	Dymamic channel acces	Config 1,2		SSB.2 CCA	
SMTC Configuration		Config 1,2		SMTC.1	
TRS Configuration		Config 1,2		TRS.1.2 TDD	
DL CCA probability for semi-static channel access (P_{CCA_DL})		Config 1,2		1	1
DL CCA model probability for dynamic static channel access ($P_{CCA_DL_1}$)		Config 1,2		1	1
DL CCA model probability for dynamic static channel access ($P_{CCA_DL_2}$)		Config 1,2		1	1
DL CCA probability for semi-static channel access (P_{CCA_DL})		Config 1,2		1	1
Correlation Matrix and Antenna Configuration				1x2	
Propagation Condition				AWGN	
EPRE ratio of PSS to SSS			dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
N_{oc} Note 2		Config 1,2	dBm/SCS kHz	-101	-101
SS-RSRP Note 3		Config 1,2	dBm/SCS kHz	-84	-84
$\hat{E}_s/I_{ot}$		Config 1,2	dB	17	17
$\hat{E}_s/N_{oc}$		Config 1,2	dB	17	17
Io Note3		Config 1,2	dBm/38.16MHz	-59	-59

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].

Note 5: Parameters P_{CCA_DL}, $P_{CCA_DL_1}$, $P_{CCA_DL_2}$ and P_{CCA_UL} are defined in clause A.3.26.2.

Note 6: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

A.10.3.5.2.2.2 Test Requirements

During T1, the UE shall start to send the ACK for PSCell in the DL slot right after slot ($i+T_{BWPswitchDelay}+k1$).

During T3, the UE shall start to send the ACK for PSCell in the DL slot right after slot ($j+T_{BWPswitchDelay}+k11$).

All of the above test requirements shall be fulfilled in order for the observed PSCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

During T1, the start of the interruption of PCell during PSCell active BWP switch shall not happen outside the BWP switch delay.

During T3, the start of the interruption of PCell during PSCell active BWP switch shall not happen outside the BWP switch delay.

The interruption of PCell shall not be longer than the interruption duration specified for active BWP switch in clause 7.32.2.7 of TS 36.133 [15].

During T1, the start of the interruption of SCell during PSCell active BWP switch shall not happen outside the BWP switch delay.

During T3, the start of the interruption of SCell during PSCell active BWP switch shall not happen outside the BWP switch delay.

The interruption of SCell shall not be longer than the interruption duration specified for active BWP switch in clause 8.6.2.

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch interruption to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK in the DL slot right after slot ($i+T_{BWPswitchDelay}+k1$), ($j+T_{BWPswitchDelay}+k1$), then the UE shall use the next available uplink resource for reporting the corresponding ACK.

Editor's note: FFS value of k1 for type 1 and type 2 UE.

A.10.3.5.3 RRC-based Active BWP Switch

A.10.3.5.3.1 E-UTRAN – NR PSCell FR1 DL active BWP switch in non-DRX in synchronous EN-DC

A.10.3.5.3.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement for RRC-based BWP switch defined in clause 8.6.3. Supported test configurations are shown in Table A.10.3.5.3.1.1-1.

The test scenario comprises of one E-UTRA PCell (Cell 1) and one NR PSCell (Cell 2) as given in Table A.10.3.5.3.1.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell are specified in Table A.10.3.5.3.1.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC) and to Cell 2 (PSCell) on radio channel 2 (PSCC).
- UE has bandwidth part BWP-1 in its RRC-configuration for Cell 1 (PSCell).
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 of initial condition in PSCell.

All cells have constant signal levels throughout the test.

The test consists of 1 time period, with duration of T1.

During T1,

Time period T1 starts when a *RRCReconfiguration* with updated bandwidth part configuration, sent from the test equipment to the UE, is completely received at the UE side in PSCell's slot # denoted *i*. The UE shall reconfigure its bandwidth part with the updated bandwidth part BWP-1 of final condition.

The UE shall be able to receive PDSCH at the beginning of the DL slot right after PSCell's DL slot ($i+T_{RRCprocessingDelay}+T_{BWPswitchDelayRRC}$) as defined in clause 8.6.3 and be ready for the reception of uplink grant for the PSCell no later than at the beginning of the DL slot right after slot ($i+T_{RRCprocessingDelay}+T_{BWPswitchDelayRRC}$). The UE shall be continuously scheduled on PSCell's BWP-1 starting from the beginning of the DL slot right after slot ($i+T_{RRCprocessingDelay}+T_{BWPswitchDelayRRC}$).

$T_{RRCprocessingDelay}$ and $T_{BWPswitchDelayRRC}$ are defined in clause 8.6.3.

The test equipment verifies the DL BWP switch time in PSCell by counting the time from the time when the RRC Reconfiguration message including updated BWP configurationis sent till the time when RRC Reconfiguration Complete message is received.

Table A.10.3.5.3.1.1-1: DL BWP switch supported test configurations

Config	Description
1	LTE FDD, With CCA: NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
2	LTE TDD, With CCA: NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note 1: The UE is only required to be tested in one of the supported test configurations. Note 2: The UE supporting EN-DC with only NR band(s) with shared spectrum access is required to be tested.	

Table A.10.3.5.3.1.1-2: General test parameters for DL BWP switch in synchronous EN-DC

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
CP length		Normal	
DRX		OFF	
DL CCA model		As specified in clause A.3.26.2.1	
UL CCA model		As specified in clause A.3.26.2.2	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell2 timing offset to cell1	µs	3	Synchronous EN-DC
T1	s	0.2	

Table A.10.3.5.3.1.1-3: NR Cell specific test parameters for DL BWP switch in synchronous EN-DC

Parameter			Unit	Cell 2
Frequency Range				**FR1**
Duplex mode		Config 1,2		TDD
TDD configuration		Config 1,2		TDDConf.1.1 CCA
$BW_{channel}$		Config 1,2		40 MHz: $N_{RB,c}$ = 106
Active DL BWP ID				1, 2
Initial DL BWP Configuration		Config 1,2		DLBWP.0.2
Initial UL BWP Configuration		Config 1,2		ULBWP.0.2
Initial Condition	Active DL BWP-1 Configuration	Config 1,2		DLBWP.1.3
Final Condition	Active DL BWP-1 Configuration	Config 1,2		DLBWP.1.1
Initial UL BWP Configuration		Config 1,2		ULBWP.0.2
Active UL BWP-1 Configuration		Config 1,2		ULBWP.1.3
Active UL BWP-2 Configuration		Config 1,2		ULBWP.1.1
PDSCH Reference measurement channel		Config 1,2		SR.1.1 CCA
RMSI CORESET parameters		Config 1,2		CR.1.1 CCA
Dedicated CORESET parameters		Config 1,2		CCR.1.1 CCA
OCNG Patterns		Config 1,2		OP.1
SSB Configuration	Semi- static channel acces	Config 1,2		SSB.1 CCA
	Dymamic channel acces	Config 1,2		SSB.2 CCA
SMTC Configuration		Config 1,2		SMTC.1
TRS Configuration		Config 1,2		TRS.1.2 TDD
DL CCA probability for semi-static channel access (P_{CCA_DL})		Config 1,2		1
DL CCA model probability for dynamic static channel access ($P_{CCA_DL_1}$)		Config 1,2		1
DL CCA model probability for dynamic static channel access ($P_{CCA_DL_2}$)		Config 1,2		1
DL CCA probability for semi-static channel access (P_{CCA_DL})		Config 1,2		1
Antenna Configuration				1x2
Propagation Condition				AWGN
EPRE ratio of PSS to SSS			dB	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note 2		Config 1,2	dBm/SCS kHz	-101
SS-RSRP Note 3		Config 1,2	dBm/SCS kHz	-84
$\hat{E}_s/I_{ot}$		Config 1,2	dB	17
$\hat{E}_s/N_{oc}$		Config 1,2	dB	17
Io Note3		Config 1,2	dBm/38.16MHz	-59

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].
Note 5:	Parameters P_{CCA_DL}, $P_{CCA_DL_1}$, $P_{CCA_DL_2}$ and P_{CCA_UL} are defined in clause A.3.26.2.
Note 6:	For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

A.10.3.5.3.1.2 Test Requirements

During T1, the UE shall be ready for the reception of uplink grant for PSCell in the beginning of the DL slot right after slot ($i+ T_{RRCprocessingDelay}+T_{BWPswitchDelayRRC}$).

All of the above test requirements shall be fulfilled in order for the observed PSCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

A.10.3.6 PSCell addition and release delay

A.10.3.6.1 Addition and Release Delay of known NR PSCell on the carrier under CCA

A.10.3.6.1.1 Test purpose and environment

The purpose of this test is to verify that the NR PSCell addition and release delays on the carrier under CCA under EN-DC are within the requirements stated in clause 7.31A.2 [15] for the case when the PSCell is known by the UE at the time of addition.

Supported test configurations are shown in A.10.3.6.1.1-1. The test parameters for the E-UTRA cell are given in Table A.3.7.2.1-1. The E-UTRA cell once set up is not changed across time.

The test parameters for NR cell are given in Tables A.10.3.6.1.1-2 and cell-specific parameters in A.10.3.6.1.1-3 below. The test consists of five successive time periods with duration of T1, T2, T3, T4 and T5 respectively. There are two carriers each with one cell. Before the test starts the UE is connected to Cell 1 (E-UTRA PCell) on radio channel 1 (PCC) but is not aware of Cell 2 (NR PSCell) on radio channel 2. The UE is only monitoring the PCC. During T1 only Cell1 is known to the UE.

Before the start of T2, the UE in the measurement control information that event-triggered reporting with Event B1 is configured for neighbour cell (Cell2). Before the start of T2 the UE is configured with the measurement gaps (gap pattern Id # 0). The Cell2 becomes known to the UE during T2. Therefore, during T2 the UE shall report Event B1. The point in time at which the RRC message to release measurement gap is transmitted from the test system defines the start of period T3. During T3, after measurement gap is released, the test system transmits the RRC message to the UE to add PSCell on radio channel 2.

The RRC message (to add PSCell) also includes a request for the UE to start periodic CSI reporting for the PSCell after the PSCell has been successfully added. The point in time at which the RRC message to add PSCell (Cell2) is received at the UE antenna connector defines the start of period T4.

The test system shall observe the periodic reporting of CSI for PSCell during T5. The point in time at which the UE has sent PRACH to the PSCell (Cell 2) defines the start of period T5.

The test system shall send a RRC message to the UE to release PSCell (Cell 2) on radio channel 2. The RRC message to release PSCell (Cell2) shall be sent to the UE during period T5, after the UE has sent at least one CQI report with non-zero CQI index for PSCell (Cell 2). The point in time at which the RRC message to release PSCell (Cell2) is received at the UE antenna connector defines the start of period T6.

Table A.10.3.6.1.1-1: Supported test configurations for FR1 PSCell

Configuration	Description
1	LTE FDD, NR SCS 30 kHz, BW 40 MHz, TDD
2	LTE TDD, NR SCS 30 kHz, BW 40 MHz, TDD
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.10.3.6.1.1-2: General Test Parameters for PSCell Addition and Release

Parameter		Unit	Value	Comment
RF Channel Number			1, 2	Two radio channels are used for this test. One for E-UTRA cell and second for NR Cell on the carrier under CCA
Initial	Active PCell		Cell1	PCell on RF channel number 1.
	Neighbour cell		Cell2	Neighbour cell on RF channel number 2.
Final Condition	Active PCell		Cell1	PCell on RF channel number 1.
	Neighbour Cell		Cell2	PSCell released on RF channel number 2.
B1	Hysteresis	dB	0	Hysteresis for evaluation of event B1.
	Threshold RSRP	dBm	-93	Actual RSRP threshold for event B1. Needs to take absolute accuracy tolerance in clause 9.1.11.1 into account plus margin.
	Time to Trigger	S	0	
DRX			OFF	Continuous monitoring of primary cell
DL CCA model	Dynamic channel access Note 1, 3			As specified in clause A.3.20.2.1
	Semi-static channel access Note 2, 3			
UL CCA model	Dynamic channel access Note 1, 3			As specified in clause A.3.20.2.2
	Semi-static channel access Note 2,3			
Measurement gap pattern Id			0	Gaps are configured before T2 and released before T3.
PRACH configuration on cell2			FR1 PRACH configuration 2	Captured in A.3.8.2.1
CQI/PMI periodicity and offset configuration index on cell2			2ms	CQI reporting for PSCell every uplink subframe
Cell-individual offset for cells on RF channel number 1		dB	0	Individual offset for cells on primary component carrier.
Cell-individual offset for cells on RF channel number 2		dB	0	Individual offset for cells on carrier frequency of cell2.
T304		ms	500	
L_{CCA_DL}			5	

T1	s	1	During this time the PCell shall be known and cell2 shall be unknown.
T2	s	≥ $T_{identify_irat_cca_without_index}$	$T_{identify_irat_cca_without_index}$ is defined in clause 8.1.2.4.21A and 8.1.2.4.22A in TS 36.133 During this time the UE shall identify neighbour cell (cell2) and report event B1.
T3	s	3	During this time the test system transmit the RRC messages to release measurement gap and add the PSCell
T4	s	≥ $T_{config_PSCell_withCCA}$	During this time the UE adds the PSCell. $T_{config_PSCell_withCCA}$ is defined in clause 7.31A.2
T5	s	0.5	During this time the UE sends CSI reports for PSCell.
T6	s	0.5	During this time the UE releases the PSCell.
NOTE 1: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy.			
NOTE 2: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy.			
NOTE 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.			

Table A.10.3.6.1.1-3: Cell Specific Parameters for PSCell Addition and Release

Parameter	Unit	Config	Test				
			T1	T2	T3	T4	T5
P_{CCA_DL} for dynamic channel access Note 5,7	-	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75				
P_{CCA_DL} for semi-static channel access Note 6,7	-	P_{CCA_DL}=0.9375	P_{CCA_DL}=0.9375				
P_{CCA_UL} for dynamic channel access Note 5,7	-	1	1				
P_{CCA_UL} for semi-static channel access Note 6,7	-	1	1				
E-UTRA RF Channel Number		1,2	1				
NR RF Channel Number		1,2	2				
TDD configuration		1,2	TDDConf.1.1 CCA				
$BW_{channel}$		1,2	40: $N_{RB,c}$ = 106				
Initial BWP Configuration		1,2	DLBWP.0.1 ULBWP.0.1				
Dedicated BWP Configuration		1,2	DLBWP.1.1 ULBWP.1.1				
PDSCH Reference		1,2	SR1.1 CCA				
RMSI CORESET Reference		1,2	CR1.1 CCA				
Dedicated CORESET Reference		1,2	CCR1.1 CCA				
OCNG Patterns		1,2	OP.1				
DBT window configuration		1, 2	DBT.1				
SSB configuration for semi-static channel access		1, 2	SSB.1 CCA				
SSB configuration for dynamic channel access		1, 2	SSB.2 CCA				

SMTC configuration		1,2	SMTC.1	
TRS Configuration		1,2	TRS.1.2 TDD	
EPRE ratio of PSS to SSS	dB	1,2	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	dBm/15 kHz	1,2	N/A	-85
N_{oc} Note2	dBm/SCS	1,2	N/A	-82
$\hat{E}_s/I_{ot}$		1,2	-infinity	0
$\hat{E}_s/N_{oc}$		1,2	-infinity	0
SS-RSRP Note3	dBm/SCS	1,2	-infinity	-82
Io Note3	dBm/38.1MHz	1,2	N/A	-51
Propagation condition		1,2	AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in slots with RMC burst transmission and is not transmitted during muted slots or during DBT windows.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.

Note 7: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

A.10.3.6.1.2 Test Requirements

The UE shall transmit the PRACH to PSCell at latest $T_{config_PSCell_withCCA}$ Note1 into T4.

The UE shall send at least one CSI report for PSCell with non-zero CQI index during T5.

The UE shall periodically send CSI reports for PSCell after the UE has sent first CQI report with non-zero CQI index during T5

The UE shall stop sending CSI reports for PSCell in at latest 20 ms into T6.

All the above test requirements shall be fulfilled in order for the observed PSCell addition delay and PSCell release delay to be counted as correct. The rate of correct observed PSCell addition delay and PSCell release delay during repeated tests shall be at least 90%.

Note1: The PSCell addition delay can be expressed as follows as specified in clause 7.31A.2 [15]:

$$T_{config_PSCell_withCCA} = T_{RRC_delay} + T_{processing} + T_{search_withCCA} + T_{\Delta_withCCA} + T_{PSCell_DU_withCCA} + 2 \text{ ms}$$

Where:

T_{RRC_delay} = 20 ms

$T_{processing}$ = 20 ms

$T_{search_withCCA}$ = 0

$T_{\Delta_withCCA}$ = (1+ L_2)*20 ms

$T_{PSCell_DU_withCCA}$ = 20 ms.

L_2 is the number of SMTC occasions not available at the UE for fine time tracking and acquiring full timing information, where $L_2 \leq L_{CCA_DL}$.

A.10.3.7 Void

A.10.4 Measurement procedure

A.10.4.1 Intra-frequency measurements

A.10.4.1.1 Event-triggered reporting tests on PSCC without gaps under non-DRX

A.10.4.1.1.1 Test purpose and environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clauses 9.2A.5.1 and 9.2A.5.2.

A.10.4.1.1.2 Test parameters

Three cells are deployed in the test, which are E-UTRAN PCell (Cell 1) and two cells on the same carrier frequency with CCA transmitting SSBs in DBT windows according to DL CCA model: PSCell (Cell 2) and a neighbour cell (Cell 3). The test parameters for the three cells are given in Table A.10.4.1.1.2-1 and A.10.4.1.1.2-2 below. In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1 and T2, respectively. During time duration T1, the UE shall not have any timing information of Cell 3.

FFS: The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

The test is conducted for SS-RSRP, SS-RSRQ, and SS-SINR:

- In the first test (Test 1), the UE is configured with SS-RSRP as Event A3 measurement quantity.
- In the second test (Test 2), the UE is configured with SS-RSRQ as Event A3 measurement quantity.
- In the third test (Test 3), the UE is configured with SS-SINR as Event A3 measurement quantity.

Table A.10.4.1.1.2-1: Supported test configurations

Configuration	Description
1	LTE FDD; NR: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	LTE TDD; NR: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Table A.10.4.1.1.2-2: General test parameters for intra-frequency event triggered reporting without gaps

Editor's note: Table TBD

Table A.10.4.1.1.2-3: Cell-specific test parameters for intra-frequency event-triggered reporting without gaps

Editor's note: Table TBD

A.10.4.1.1.3 Test Requirements

The UE shall send one Event A3 triggered measurement report (SS-RSRP in Test 1, SS-RSRQ in Test 2, SS-SINR in Test 3), with a measurement reporting delay less than D1 ms from the beginning of time period T2.

Editor's note: D1=TBD.

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

FFS: NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.10.4.1.2 Event-triggered reporting tests on PSCC without gaps under DRX

A.10.4.1.2.1 Test purpose and environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clauses 9.2A.5.1 and 9.2A.5.2.

A.10.4.1.2.2 Test parameters

A.10.4.1.2.3 Test Requirements

The UE shall send one Event A3 triggered measurement report (SS-RSRP in Test 1 and Test 2, SS-RSRQ in Test 3 and Test 4, SS-SINR in Test 5 and Test 6), with a measurement reporting delay less than D1 ms from the beginning of time period T2.

Editor's note: D1=TBD (D1 is different for different DRX configurations).

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

FFS: NOTE: The actual overall delays measured in the test may be up to 2xTTI_{DCCH} higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.10.4.1.3 Event-triggered reporting tests on PSCC with per-UE gaps under non-DRX

A.10.4.1.3.1 Test purpose and environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clauses 9.2A.6.1 and 9.2A.6.2.

A.10.4.1.3.2 Test parameters

A.10.4.1.3.3 Test Requirements

The UE shall send one Event A3 triggered measurement report (SS-RSRP in Test 1, SS-RSRQ in Test 2, SS-SINR in Test 3), with a measurement reporting delay less than D1 ms from the beginning of time period T2.

Editor's note: D1=TBD.

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

FFS: NOTE: The actual overall delays measured in the test may be up to 2xTTI_{DCCH} higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.10.4.1.4 Event-triggered reporting tests on PSCC with per-UE gaps under DRX

A.10.4.1.4.1 Test purpose and environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clauses 9.2A.6.1 and 9.2A.6.2.

A.10.4.1.4.2 Test parameters

A.10.4.1.4.3 Test Requirements

The UE shall send one Event A3 triggered measurement report (SS-RSRP in Test 1 and Test 2, SS-RSRQ in Test 3 and Test 4, SS-SINR in Test 5 and Test 6), with a measurement reporting delay less than D1 ms from the beginning of time period T2.

Editor's note: D1=TBD (D1 is different for different DRX configurations).

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

FFS: NOTE: The actual overall delays measured in the test may be up to 2xTTI_{DCCH} higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.10.4.1.5 Event-triggered reporting tests on SCC without gaps under non-DRX

A.10.4.1.5.1 Test purpose and environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clauses 9.2A.5.1 and 9.2A.5.2.

A.10.4.1.5.2 Test parameters

A.10.4.1.5.3 Test Requirements

The UE shall send one Event A3 triggered measurement report (SS-RSRP in Test 1, SS-RSRQ in Test 2, SS-SINR in Test 3), with a measurement reporting delay less than D1 ms from the beginning of time period T2.

Editor's note: D1=TBD.

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

FFS: NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.10.4.1.6 Event-triggered reporting tests on SCC without gaps under DRX

A.10.4.1.6.1 Test purpose and environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clauses 9.2A.5.1 and 9.2A.5.2.

A.10.4.1.6.2 Test parameters

A.10.4.1.6.3 Test Requirements

The UE shall send one Event A3 triggered measurement report (SS-RSRP in Test 1 and Test 2, SS-RSRQ in Test 3 and Test 4, SS-SINR in Test 5 and Test 6), with a measurement reporting delay less than D1 ms from the beginning of time period T2.

Editor's note: D1=TBD (D1 is different for different DRX configurations).

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

FFS: NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.10.4.1.7 Event-triggered reporting tests on SCC with per-UE gaps under non-DRX

A.10.4.1.7.1 Test purpose and environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clauses 9.2A.6.1 and 9.2A.6.2.

A.10.4.1.7.2 Test parameters

A.10.4.1.7.3 Test Requirements

The UE shall send one Event A3 triggered measurement report (SS-RSRP in Test 1, SS-RSRQ in Test 2, SS-SINR in Test 3), with a measurement reporting delay less than D1 ms from the beginning of time period T2.

Editor's note: D1=TBD.

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

FFS: NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.10.4.1.8 Event-triggered reporting tests on SCC with per-UE gaps under DRX

A.10.4.1.8.1 Test purpose and environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clauses 9.2A.6.1 and 9.2A.6.2.

A.10.4.1.8.2 Test parameters

A.10.4.1.8.3 Test Requirements

The UE shall send one Event A3 triggered measurement report (SS-RSRP in Test 1 and Test 2, SS-RSRQ in Test 3 and Test 4, SS-SINR in Test 5 and Test 6), with a measurement reporting delay less than D1 ms from the beginning of time period T2.

Editor's note: D1=TBD (D1 is different for different DRX configurations).

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

FFS: NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.10.4.1.9 RSSI measurement reporting on PSCC

A.10.4.1.9.1 Test purpose and environment

The purpose of this test is to verify that the UE correctly reports RSSI measurements. This test will partly verify the intra-frequency RSSI measurement reporting requirements in Section 9.2A.7.1.

A.10.4.1.9.2 Test parameters

In the test, the UE is configured to perform intra-frequency RSSI measurements on a carrier frequency under CCA.

Supported test configurations are shown in Table A.10.4.1.9.2-1. There are two cells in the test: Cell 1 is E-UTRAN PCell on a licensed band, and Cell 2 is PSCell operating on a carrier frequency under CCA. Prior to the start of the time duration T1, the UE is connected to Cell 1 and Cell 2. The E-UTRAN PCell setting refers to Table A.3.7.2.1-1.

Table A.10.4.1.9.2-1: Supported test configurations.

Configuration	Description
1	LTE FDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
2	LTE TDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
NOTE: The UE is only required to pass in one of the supported test configurations above.	

Table A.10.4.1.9.2-2: General test parameters.

Editor's note: Table TBD

A.10.4.1.10 Channel occupancy measurement reporting on PSCC

A.10.4.1.10.1 Test purpose and environment

The purpose of this test is to verify that the UE correctly reports channel occupancy measurements. This test will partly verify the intra-frequency channel occupancy measurement reporting requirements in Section 9.2A.7.2.

A.10.4.1.10.2 Test parameters

In the test, the UE is configured to perform intra-frequency channel occupancy measurements on a carrier frequency under CCA.

Supported test configurations are shown in Table A.10.4.1.10.2-1. There are two cells in the test: Cell 1 is E-UTRAN PCell on a licensed band, and Cell 2 is PSCell operating on a carrier frequency under CCA. Prior to the start of the time duration T1, the UE is connected to Cell 1 and Cell 2. The E-UTRAN PCell setting refers to Table A.3.7.2.1-1.

Table A.10.4.1.10.2-1: Supported test configurations.

Configuration	Description
1	LTE FDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
2	LTE TDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
NOTE: The UE is only required to pass in one of the supported test configurations above.	

Table A.10.4.1.10.2-2: General test parameters.

Editor's note: Table is TBD

A.10.4.1.11 RSSI measurement reporting on SCC

A.10.4.1.11.1 Test purpose and environment

The purpose of this test is to verify that the UE correctly reports RSSI measurements. This test will partly verify the intra-frequency RSSI measurement reporting requirements in Section 9.2A.7.1.

A.10.4.1.11.2 Test parameters

In the test, the UE is configured to perform intra-frequency RSSI measurements on a carrier frequency under CCA.

Supported test configurations are shown in Table A.10.4.1.11.2-1. There are three cells in the test: Cell 1 is E-UTRAN PCell on a licensed band, Cell 2 is PSCell operating on a carrier frequency under CCA, Cell 3 is SCell on a carrier frequency under CCA. Prior to the start of the time duration T1, the UE is connected to Cell 1, Cell 2, and Cell 3. The E-UTRAN PCell setting refers to Table A.3.7.2.1-1.

Table A.10.4.1.11.2-1: Supported test configurations.

Configuration	Description
1	LTE FDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
2	LTE TDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
NOTE: The UE is only required to pass in one of the supported test configurations above.	

Table A.10.4.1.11.2-2: General test parameters.

Editor's note: Table TBD

A.10.4.1.12 Channel occupancy measurement reporting on SCC

A.10.4.1.12.1 Test purpose and environment

The purpose of this test is to verify that the UE correctly reports channel occupancy measurements. This test will partly verify the intra-frequency channel occupancy measurement reporting requirements in Section 9.2A.7.2.

A.10.4.1.12.2 Test parameters

In the test, the UE is configured to perform intra-frequency channel occupancy measurements on a carrier frequency under CCA.

Supported test configurations are shown in Table A.10.4.1.12.2-1. There are three cells in the test: Cell 1 is E-UTRAN PCell on a licensed band, Cell 2 is PSCell operating on a carrier frequency under CCA, and Cell 3 is SCell operating on a carrier frequency under CCA. Prior to the start of the time duration T1, the UE is connected to Cell 1, Cell 2, Cell 3. The E-UTRAN PCell setting refers to Table A.3.7.2.1-1.

Table A.10.4.1.12.2-1: Supported test configurations.

Configuration	Description
1	LTE FDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
2	LTE TDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
NOTE: The UE is only required to pass in one of the supported test configurations above.	

Table A.10.4.1.12.2-2: General test parameters.

Editor's note: Table is TBD

A.10.4.2 Inter-frequency measurements

A.10.4.2.1 RSSI measurement reporting

A.10.4.2.1.1 Test purpose and environment

The purpose of this test is to verify that the UE correctly reports RSSI measurements. This test will partly verify the inter-frequency RSSI measurement reporting requirements in Section 9.3A.8.

A.10.4.2.1.2 Test parameters

In the test, the UE is configured to perform inter-frequency RSSI measurements on a carrier frequency under CCA.

Supported test configurations are shown in Table A.10.4.2.1.2-1. There are two cells in the test: Cell 1 is E-UTRAN PCell on a licensed band, and Cell 2 is PSCell operating on a carrier frequency under CCA. Prior to the start of the time duration T1, the UE is connected to Cell 1 and Cell 2. The RSSI measurement is performed on an inter-frequency under CCA. The E-UTRAN PCell setting refers to Table A.3.7.2.1-1.

Table A.10.4.2.1.2-1: Supported test configurations.

Configuration	Description
1	LTE FDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
2	LTE TDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
NOTE: The UE is only required to pass in one of the supported test configurations above.	

Table A.10.4.2.1.2-2: General test parameters.

Editor's note: Table TBD

A.10.4.2.2 Channel occupancy measurement reporting

A.10.4.2.2.1 Test purpose and environment

The purpose of this test is to verify that the UE correctly reports channel occupancy measurements. This test will partly verify the inter-frequency channel occupancy measurement reporting requirements in Section 9.3A.9.

A.10.4.2.2.2 Test parameters

In the test, the UE is configured to perform inter-frequency channel occupancy measurements on a carrier frequency under CCA.

Supported test configurations are shown in Table A.10.4.2.2.2-1. There are two cells in the test: Cell 1 is E-UTRAN PCell on a licensed band, and Cell 2 is PSCell operating on a carrier frequency under CCA. Prior to the start of the time duration T1, the UE is connected to Cell 1 and Cell 2. The channel occupancy measurement is performed on an inter-frequency under CCA. The E-UTRAN PCell setting refers to Table A.3.7.2.1-1.

Table A.10.4.2.2.2-1: Supported test configurations.

Configuration	Description
1	LTE FDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
2	LTE TDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
NOTE: The UE is only required to pass in one of the supported test configurations above.	

Table A.10.4.2.2.2-2: General test parameters.

Editor's note: Table is TBD

A.10.4.2.3 EN-DC event triggered reporting tests for FR1 with CCA cell without SSB time index detection when DRX is not used

A.10.4.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3A.4 and 9.3A.5.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 with CCA on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 with CCA on NR RF channel 2. The test parameters and configurations are given in Tables A.10.4.2.3.1-1, A.10.4.2.3.1-2, and A.10.4.2.3.1-3.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.10.4.2.3.1-2 is provided for a UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #4 as defined in Table A.10.4.2.3.1-2 is provided for UE that support per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 2. Otherwise it is only required to pass test 1.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.1-1. Supported test configurations are shown in table A.10.4.2.3.1-1.

Table A.10.4.2.3.1-1: EN-DC event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	E-UTRAN cell: LTE FDD NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	E-UTRAN cell: LTE TDD NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.10.4.2.3.1-2: General test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		Config 1,2	1		One E-UTRAN carrier frequency is used.
NR RF Channel Number		Config 1,2	1, 2		Two FR1 NR carrier frequencies are used. Channels 1 and 2 are with CCA.
Active cell		Config 1,2	LTE Cell 1 (PCell) and NR cell 2 with CCA (PScell)		LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 with CCA is on NR RF channel number 1.
Neighbour cell		Config 1,2	NR cell 3		NR cell 3 is on NR RF channel number 2 with CCA.
DL CCA model		Config 1,2	As specified in clause A.3.26.2.1		
UL CCA model		Config 1,2	As specified in clause A.3.26.2.2		

Gap Pattern Id		Config 1,2	0	4	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2	9	9	
A3-Offset	dB	Config 1,2	-6		
Hysteresis	dB	Config 1,2	0		
CP length		Config 1,2	Normal		
TimeToTrigger	s	Config 1,2	0		
Filter coefficient		Config 1,2	0		L3 filtering is not used
DRX		Config 1,2	OFF		DRX is not used
Time offset between PCell and PSCell		Config 1,2	3 μs		Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,2	3 μs		Synchronous cells.
T1	s	Config 1,2	5		
T2	s	Config 1,2	1.7	1.7	

Table A.10.4.2.3.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

Parameter		Unit	Test configuration	Cell 2		Cell 3	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2	1		2	
Duplex mode			Config 1,2	TDD			
$BW_{channel}$		MHz	Config 1,2	40: $N_{RB,c}$ = 106			
BWP BW		MHz	Config 1,2	40: $N_{RB,c}$ = 106			
TDD configuration			Config 1,2	TDDConf.1.1 CCA		TDDConf.1.1 CCA	
Initial DL BWP			Config 1,2	DLBWP.0.1		NA	
Initial UL BWP			Config 1,2	ULBWP.0.1		NA	
Dedicated DL BWP			Config 1,2	DLBWP.1.1		NA	
Dedicated UL BWP			Config 1,2	ULBWP.1.1		NA	
TRS configuration			Config 1,2	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,2	SR.1.1 CCA		-	
CORESET Reference Channel			Config 1,2	CR.1.1 CCA		-	
SSB parameters	Semi-static channel access Note 5,7		Config 1,2	SSB.1 CCA		SSB.1 CCA	
	Dynamic channel access Note 6,7		Config 1,2	SSB.2 CCA		SSB.2 CCA	
DBT window configuration			Config 1,2	As defined in A.3.28.1		As defined in A.3.28.1	
SMTC configuration			Config 1,2	SMTC.1		SMTC.4	
PDSCH/PDCCH		kHz	Config 1,2	30		30	
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1,2	P_{CCA_DL}=0.9375		P_{CCA_DL}=0.9375	
	Dynamic channel access Note 6,7		Config 1,2	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	

UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1,2	P_{CCA_UL}=1		P_{CCA_UL}=1	
	Dynamic channel access Note 6,7		Config 1,2	P_{CCA_UL}=1		P_{CCA_UL}=1	
L_{CCA_DL}			Config 1,2	12		12	
W_{CCA_DL}		ms	Config 1,2	$T_{PSS/SSS_sync_inter_cca}$		$T_{PSS/SSS_sync_inter_cca}$	
EPRE ratio of PSS to SSS			Config 1,2	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		dBm/15kHz	Config 1,2	-104		-104	
N_{oc} Note2		dBm/SCS	Config 1,2	-101		-101	
SS-RSRP Note 3		dBm/SCS	Config 1,2	-91	-91	-Infinity	-88
$\hat{E}_s / I_{ot}$		dB	Config 1,2	4	4	-Infinity	7
$\hat{E}_s / N_{oc}$		dB	Config 1,2	4	4	-Infinity	7
Io Note3		dBm/38.16MHz	Config 1,2	-58.49	-58.49	-63.94	-56.15
Propagation Condition			Config 1,2	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.

Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.

A.10.4.2.3.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_without_index}$ from the beginning of time period T2. The UE shall not send event

triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_without_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2 UE is not required to report SSB time index.

$T_{identify_inter_cca_without_index} = (T_{PSS/SSS_sync_inter_cca} + T_{SSB_measurement_period_inter_cca})$ ms, where

$T_{PSS/SSS_sync_inter_cca}$: it is the time period used in PSS/SSS detection given in table 9.3A.4-1.

$T_{SSB_measurement_period_inter_cca}$: equal to a measurement period of SSB based measurement given in table 9.3A.5-1.

For test 1, MGRP = 40 ms and for test 2 MGRP = 20 ms.

SMTC period = 20 ms.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.10.4.2.4 EN-DC event triggered reporting tests for FR1 cell with CCA without SSB time index detection when DRX is used

A.10.4.2.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3A.4 and 9.3A.5.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 with CCA on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 with CCA on NR RF channel 2. The test parameters and configurations are given in Tables A.10.4.2.4.1-1, A.10.4.2.4.1-2, and A.10.4.2.4.1-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table A.10.4.2.4.1-2 is provided for a UE that does not support per-FR gap and in test 3&4 measurement gap pattern configuration #4 as defined in Table A.10.4.2.4.1-2 is provided for UE that support per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 3&4. Otherwise it is only required to pass test 1&2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.1-1. Supported test configurations are shown in table A.10.4.2.4.1-1.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.10.4.2.4.1-1: EN-DC event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	E-UTRAN cell: LTE FDD NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	E-UTRAN cell: LTE TDD NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.10.4.2.4.1-2: General test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

Parameter	Unit	Test configuration	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
E-UTRA RF Channel Number		Config 1,2	1				One E-UTRAN carrier frequency is used.
NR RF Channel Number		Config 1,2	1, 2				Two FR1 NR carrier frequencies are used. Channels 1 and 2 are with CCA.
Active cell		Config 1,2	LTE Cell 1 (PCell) and NR cell 2 with CCA (PScell)				LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 with CCA is on NR RF channel number 1.
Neighbour cell		Config 1,2	NR cell 3				NR cell 3 is on NR RF channel number 2 with CCA.
DL CCA model		Config 1,2	As specified in clause A.3.26.2.1				
UL CCA model		Config 1,2	As specified in clause A.3.26.2.2				
Gap Pattern Id		Config 1,2	0		4		As specified in clause A.3.3
Measurement gap offset		Config 1,2	9		9		
A3-Offset	dB	Config 1,2	-6				
Hysteresis	dB	Config 1,2	0				
CP length		Config 1,2	Normal				
TimeToTrigger	s	Config 1,2	0				
Filter coefficient		Config 1,2	0				L3 filtering is not used
DRX		Config 1,2	DRX .1	DRX .2	DRX .1	DRX .2	DRX is not used
Time offset between PCell and PSCell		Config 1,2	3 μs				Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,2	3 μs				Synchronous cells.
T1	s	Config 1,2	5				
T2	s	Config 1,2	2.5	17	2.5	17	

Table A.10.4.2.4.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

Parameter	Unit	Test configuration	Cell 2				Cell 3			
			T1	T2	T3	T4	T1	T2	T3	T4
NR RF Channel Number		Config 1,2	1				2			
Duplex mode		Config 1,2	TDD							
$BW_{channel}$	MHz	Config 1,2	40: $N_{RB,c}$ = 106							
BWP BW	MHz	Config 1,2	40: $N_{RB,c}$ = 106							
TDD configuration		Config 1,2	TDDConf.1.1 CCA				TDDConf.1.1 CCA			
Initial DL BWP		Config 1,2	DLBWP.0.1				NA			
Initial UL BWP		Config 1,2	ULBWP.0.1				NA			
Dedicated DL BWP		Config 1,2	DLBWP.1.1				NA			
Dedicated UL BWP		Config 1,2	ULBWP.1.1				NA			
TRS configuration		Config 1,2	TRS.1.2 TDD				NA			

OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2	OP.1		OP.1	
PDSCH Reference			Config 1,2	SR.1.1 CCA		-	
CORESET Reference Channel			Config 1,2	CR.1.1 CCA		-	
SSB parameters	Semi-static channel access Note 5,7		Config 1,2	SSB.1 CCA		SSB.1 CCA	
	Dynamic channel access Note 6,7		Config 1,2	SSB.2 CCA		SSB.2 CCA	
DBT window configuration			Config 1,2	As defined in A.3.28.1		As defined in A.3.28.1	
SMTC configuration			Config 1,2	SMTC.1		SMTC.4	
PDSCH/PDCCH		kHz	Config 1,2	30		30	
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1,2	P_{CCA_DL}=0.9375		P_{CCA_DL}=0.9375	
	Dynamic channel access Note 6,7		Config 1,2	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	
UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1,2	P_{CCA_UL}=1		P_{CCA_UL}=1	
	Dynamic channel access Note 6,7		Config 1,2	P_{CCA_UL}=1		P_{CCA_UL}=1	
L_{CCA_DL}			Config 1,2	5		5	
W_{CCA_DL}		ms	Config 1,2	$T_{PSS/SSS_sync_inter_cca}$		$T_{PSS/SSS_sync_inter_cca}$	
EPRE ratio of PSS to SSS			Config 1,2	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		dBm/15kHz	Config 1,2	-104		-104	
N_{oc} Note2		dBm/SCS	Config 1,2	-101		-101	
SS-RSRP Note 3		dBm/SCS	Config 1,2	-91	-91	-Infinity	-88
$\hat{E}_s / I_{ot}$		dB	Config 1,2	4	4	-Infinity	7

$\hat{E}_s / N_{oc}$	dB	Config 1,2	4	4	-Infinity	7
Io[Note3]	dBm/38.16MHz	Config 1,2	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.

Table A.10.4.2.4.1-4: DRX-Configuration for SA inter-frequency event triggered reporting without SSB time index detection

Field	Test1&3	Test2&4	Comment
	Value	Value	
drx-onDurationTimer	ms1	ms1	As specified in clause 6.3.2 in TS 38.331 [2]
drx-InactivityTimer	ms1	ms1	
drx-RetransmissionTimerDL	sl1	sl1	
drx-RetransmissionTimerUL	sl1	sl1	
drx-LongCycleStartOffset	ms40	Ms640	
shortDRX	disable	disable	

Table A.10.4.2.4.1-5: *TimeAlignmentTimer* -Configuration SA inter-frequency event triggered reporting without SSB time index detection

Field	Value	Comment
TimeAlignmentTimer	ms500	As specified in clause 6.3.2 in TS 38.331 [2]

A.10.4.2.4.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_without_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_without_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 3 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_without_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 4 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_without_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1, 2, 3 and 4 UE is not required to report SSB time index.

$T_{identify_inter_cca_without_index} = (T_{PSS/SSS_sync_inter_cca} + T_{SSB_measurement_period_inter_cca})$ ms, where

$T_{PSS/SSS_sync_inter_cca}$: it is the time period used in PSS/SSS detection given in table 9.3A.4-1.

$T_{SSB_measurement_period_inter_cca}$: equal to a measurement period of SSB based measurement given in table 9.3A.5-1.

For tests 1 and 2, MGRP = 40 ms and for tests 3 and 4 MGRP = 20 ms.

For tests 1 and 3, DRX cycle = 40 ms and for tests 2 and 4 DRX cycle = 640 ms.

SMTC period = 20 ms.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.10.4.2.5 EN-DC event triggered reporting tests for FR1 cell with CCA with SSB time index detection when DRX is not used

A.10.4.2.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3A.4 and 9.3A.5.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 with CCA on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 with CCA on NR RF channel 2. The test parameters and configurations are given in Tables A.10.4.2.5.1-1, A.10.4.2.5.1-2, and A.10.4.2.5.1-3.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.10.4.2.5.1-2 is provided for a UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #4 as defined in Table A.10.4.2.5.1-2 is provided for UE that support per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 2. Otherwise it is only required to pass test 1.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.1-1. Supported test configurations are shown in table A.10.4.2.5.1-1.

Table A.10.4.2.5.1-1: EN-DC event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	E-UTRAN cell: LTE FDD NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	E-UTRAN cell: LTE TDD NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.10.4.2.5.1-2: General test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

Parameter	Unit	Test	Value	Comment

		configuration	Test 1	Test 2	
E-UTRA RF Channel Number		Config 1,2	1		One E-UTRAN carrier frequency is used.
NR RF Channel Number		Config 1,2	1, 2		Two FR1 NR carrier frequencies are used. Channels 1 and 2 are with CCA.
Active cell		Config 1,2	LTE Cell 1 (PCell) and NR cell 2 with CCA (PScell)		LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 with CCA is on NR RF channel number 1.
Neighbour cell		Config 1,2	NR cell 3		NR cell 3 is on NR RF channel number 2 with CCA.
DL CCA model		Config 1,2	As specified in clause A.3.26.2.1		
UL CCA model		Config 1,2	As specified in clause A.3.26.2.2		
Gap Pattern Id		Config 1,2	0	4	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2	9	9	
A3-Offset	dB	Config 1,2	-6		
Hysteresis	dB	Config 1,2	0		
CP length		Config 1,2	Normal		
TimeToTrigger	s	Config 1,2	0		
Filter coefficient		Config 1,2	0		L3 filtering is not used
DRX		Config 1,2	OFF		DRX is not used
Time offset between PCell and PSCell		Config 1,2	3 μs		Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,2	3 μs		Synchronous cells.
T1	s	Config 1,2	5		
T2	s	Config 1,2	2	2	

Table A.10.4.2.5.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
NR RF Channel Number		Config 1,2	1		2	
Duplex mode		Config 1,2	TDD			
$BW_{channel}$	MHz	Config 1,2	40: $N_{RB,c}$ = 106			
BWP BW	MHz	Config 1,2	40: $N_{RB,c}$ = 106			
TDD configuration		Config 1,2	TDDConf.1.1 CCA		TDDConf.1.1 CCA	
Initial DL BWP		Config 1,2	DLBWP.0.1		NA	
Initial UL BWP		Config 1,2	ULBWP.0.1		NA	
Dedicated DL BWP		Config 1,2	DLBWP.1.1		NA	
Dedicated UL BWP		Config 1,2	ULBWP.1.1		NA	
TRS configuration		Config 1,2	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		Config 1,2	OP.1		OP.1	
PDSCH Reference		Config 1,2	SR.1.1 CCA		-	
CORESET Reference Channel		Config 1,2	CR.1.1 CCA		-	

SSB parameters	Semi-static channel access Note 5,7		Config 1,2	SSB.1 CCA		SSB.1 CCA	
	Dynamic channel access Note 6,7		Config 1,2	SSB.2 CCA		SSB.2 CCA	
DBT window configuration			Config 1,2	As defined in A.3.28.1		As defined in A.3.28.1	
SMTC configuration			Config 1,2	SMTC.1		SMTC.4	
PDSCH/PDCCH		kHz	Config 1,2	30		30	
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1,2	P_{CCA_DL}=0.9375		P_{CCA_DL}=0.9375	
	Dynamic channel access Note 6,7		Config 1,2	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	
UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1,2	P_{CCA_UL}=1		P_{CCA_UL}=1	
	Dynamic channel access Note 6,7		Config 1,2	P_{CCA_UL}=1		P_{CCA_UL}=1	
L_{CCA_DL}			Config 1,2	5		5	
W_{CCA_DL}		ms	Config 1,2	$T_{PSS/SSS_sync_inter_cca}$		$T_{PSS/SSS_sync_inter_cca}$	
EPRE ratio of PSS to SSS			Config 1,2	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		dBm/15kHz	Config 1,2	-104		-104	
N_{oc} Note2		dBm/SCS	Config 1,2	-101		-101	
SS-RSRP Note 3		dBm/SCS	Config 1,2	-91	-91	-Infinity	-88
$\hat{E}_s / I_{ot}$		dB	Config 1,2	4	4	-Infinity	7
$\hat{E}_s / N_{oc}$		dB	Config 1,2	4	4	-Infinity	7
Io Note3		dBm/38.16MHz	Config 1,2	-58.49	-58.49	-63.94	-56.15
Propagation Condition			Config 1,2	AWGN			

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 6:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 7:	For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.

A.10.4.2.5.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_with_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_with_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2 UE is required to report SSB time index.

$T_{identify_inter_cca_with_index} = (T_{PSS/SSS_sync_inter_cca} + T_{SSB_measurement_period_inter_cca} + T_{SSB_time_index_inter_cca})$ ms, where

$T_{PSS/SSS_sync_inter_cca}$: it is the time period used in PSS/SSS detection given in table 9.3A.4-1.

$T_{SSB_time_index_inter_cca}$: it is the time period used to acquire the index of the SSB being measured given in table 9.3A.4-2.

$T_{SSB_measurement_period_inter_cca}$: equal to a measurement period of SSB based measurement given in table 9.3A.5-1.

For test 1, MGRP = 40 ms and for test 2 MGRP = 20 ms.

SMTC period = 20 ms.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.10.4.2.6 EN-DC event triggered reporting tests for FR1 cell with CCA with SSB time index detection when DRX is used

A.10.4.2.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3A.4 and 9.3A.5.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 with CCA on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 with CCA on NR RF channel 2. The test parameters and configurations are given in Tables A.10.4.2.6.1-1, A.10.4.2.6.1-2, and A.10.4.2.6.1-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table A.10.4.2.6.1-2 is provided for a UE that does not support per-FR gap and in test 3&4 measurement gap pattern configuration #4 as defined in Table

A.10.4.2.6.1-2 is provided for UE that support per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 3&4. Otherwise it is only required to pass test 1&2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.1-1. Supported test configurations are shown in table A.10.4.2.6.1-1.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.10.4.2.6.1-1: EN-DC event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	E-UTRAN cell: LTE FDD NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	E-UTRAN cell: LTE TDD NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.10.4.2.6.1-2: General test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

Parameter	Unit	Test configuration	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
E-UTRA RF Channel Number		Config 1,2	1				One E-UTRAN carrier frequency is used.
NR RF Channel Number		Config 1,2	1, 2				Two FR1 NR carrier frequencies are used. Channels 1 and 2 are with CCA.
Active cell		Config 1,2	LTE Cell 1 (PCell) and NR cell 2 with CCA (PScell)				LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 with CCA is on NR RF channel number 1.
Neighbour cell		Config 1,2	NR cell 3				NR cell 3 is on NR RF channel number 2 with CCA.
DL CCA model		Config 1,2	As specified in clause A.3.26.2.1				
UL CCA model		Config 1,2	As specified in clause A.3.26.2.2				
Gap Pattern Id		Config 1,2	0		4		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2	9		9		
A3-Offset	dB	Config 1,2	-6				
Hysteresis	dB	Config 1,2	0				
CP length		Config 1,2	Normal				
TimeToTrigger	s	Config 1,2	0				
Filter coefficient		Config 1,2	0				L3 filtering is not used
DRX		Config 1,2	DRX .1	DRX .2	DRX .1	DRX .2	As specified in clause A.3.3
Time offset between PCell and PSCell		Config 1,2	3 μs				Synchronous EN-DC

Time offset between serving and neighbour cells		Config 1,2	3 μs				Synchronous cells.
T1	s	Config 1,2	5				
T2	s	Config 1,2	3	20	3	20	

Table A.10.4.2.6.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

Parameter		Unit	Test configuration	Cell 2				Cell 3			
				T1	T2	T3	T4	T1	T2	T3	T4
NR RF Channel Number			Config 1,2	1				2			
Duplex mode			Config 1,2	TDD							
$BW_{channel}$		MHz	Config 1,2	40: $N_{RB,c}$ = 106							
BWP BW		MHz	Config 1,2	40: $N_{RB,c}$ = 106							
TDD configuration			Config 1,2	TDDConf.1.1 CCA				TDDConf.1.1 CCA			
Initial DL BWP			Config 1,2	DLBWP.0.1				NA			
Initial UL BWP			Config 1,2	ULBWP.0.1				NA			
Dedicated DL BWP			Config 1,2	DLBWP.1.1				NA			
Dedicated UL BWP			Config 1,2	ULBWP.1.1				NA			
TRS configuration			Config 1,2	TRS.1.2 TDD				NA			
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2	OP.1				OP.1			
PDSCH Reference			Config 1,2	SR.1.1 CCA				-			
CORESET Reference Channel			Config 1,2	CR.1.1 CCA				-			
SSB parameters	Semi-static channel access Note 5,7		Config 1,2	SSB.1 CCA				SSB.1 CCA			
	Dynamic channel access Note 6,7		Config 1,2	SSB.2 CCA				SSB.2 CCA			
DBT window configuration			Config 1,2	As defined in A.3.28.1				As defined in A.3.28.1			
SMTC configuration			Config 1,2	SMTC.1				SMTC.4			
PDSCH/PDCCH		kHz	Config 1,2	30				30			
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1,2	P_{CCA_DL}=0.9375				P_{CCA_DL}=0.9375			
	Dynamic channel access Note 6,7		Config 1,2	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75				$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75			
UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1,2	P_{CCA_UL}=1				P_{CCA_UL}=1			
	Dynamic channel access Note 6,7		Config 1,2	P_{CCA_UL}=1				P_{CCA_UL}=1			
L_{CCA_DL}			Config 1,2	2				2			
W_{CCA_DL}		ms	Config 1,2	$T_{PSS/SSS_sync_inter_cca}$				$T_{PSS/SSS_sync_inter_cca}$			
EPRE ratio of PSS to SSS											

EPRE ratio of PBCH DMRS to SSS		Config 1,2	0		0	
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15kHz	Config 1,2	-104		-104	
N_{oc} Note2	dBm/SCS	Config 1,2	-101		-101	
SS-RSRP Note 3	dBm/SCS	Config 1,2	-91	-91	-Infinity	-88
$\hat{E}_s / I_{ot}$	dB	Config 1,2	4	4	-Infinity	7
$\hat{E}_s / N_{oc}$	dB	Config 1,2	4	4	-Infinity	7
Io Note3	dBm/38.16MHz	Config 1,2	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.

Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.

Table A.10.4.2.6.1-4: DRX-Configuration for SA inter-frequency event triggered reporting without SSB time index detection

Field	Test1&3	Test2&4	Comment
	Value	Value	
drx-onDurationTimer	ms1	ms1	As specified in clause 6.3.2 in TS 38.331 [2]
drx-InactivityTimer	ms1	ms1	
drx-RetransmissionTimerDL	sl1	sl1	
drx-RetransmissionTimerUL	sl1	sl1	
drx-LongCycleStartOffset	ms40	Ms640	
shortDRX	disable	disable	

Table A.10.4.2.6.1-5: *TimeAlignmentTimer* -Configuration SA inter-frequency event triggered reporting without SSB time index detection

Field	Value	Comment
TimeAlignmentTimer	ms500	As specified in clause 6.3.2 in TS 38.331 [2]

A.10.4.2.6.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_with_}$from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_with_}$from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 3 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_with_}$from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 4 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_with_}$from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1, 2, 3 and 4 UE is required to report SSB time index.

$T_{identify_inter_cca_with_index} = (T_{PSS/SSS_sync_inter_cca} + T_{SSB_measurement_period_inter_cca} + T_{SSB_time_index_inter_cca})$ ms, where

$T_{PSS/SSS_sync_inter_cca}$: it is the time period used in PSS/SSS detection given in table 9.3A.4-1.

$T_{SSB_time_index_inter_cca}$: it is the time period used to acquire the index of the SSB being measured given in table 9.3A.4-2.

$T_{SSB_measurement_period_inter_cca}$: equal to a measurement period of SSB based measurement given in table 9.3A.5-1.

For tests 1 and 2, MGRP = 40 ms and for tests 3 and 4 MGRP = 20 ms.

For tests 1 and 3, DRX cycle = 40 ms and for tests 2 and 4 DRX cycle = 640 ms.

SMTC period = 20 ms.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.10.4.2.7 EN-DC event triggered reporting tests for FR1 cell without SSB time index detection when DRX is not used

A.10.4.2.7.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3A.4 and 9.3A.5.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 with CCA on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 on NR RF channel 2. The test parameters and configurations are given in Tables A.10.4.2.7.1-1, A.10.4.2.7.1-2, and A.10.4.2.7.1-3.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.10.4.2.7.1-2 is provided for a UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #4 as defined in Table A.10.4.2.7.1-2 is provided for UE that support per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 2. Otherwise it is only required to pass test 1.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.1-1. Supported test configurations are shown in table A.10.4.2.7.1-1.

Table A.10.4.2.7.1-1: EN-DC event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	E-UTRAN cell: LTE FDD NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	E-UTRAN cell: LTE FDD NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
3	E-UTRAN cell: LTE FDD NR cell without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	E-UTRAN cell: LTE TDD NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
5	E-UTRAN cell: LTE TDD NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
6	E-UTRAN cell: LTE TDD NR cell without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.10.4.2.7.1-2: General test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1		One E-UTRAN carrier frequency is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1, 2		Two FR1 NR carrier frequencies are used. NR RF channel 1 is with CCA.

Active cell		Config 1,2,3,4,5,6	LTE Cell 1 (PCell) and NR cell 2 (PScell)		LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1 with CCA.
Neighbour cell		Config 1,2,3,4,5,6	NR cell 3		NR cell 3 is on NR RF channel number 2.
DL CCA model		Config 1,2,3,4,5,6	As specified in clause A.3.26.2.1		
UL CCA model		Config 1,2,3,4,5,6	As specified in clause A.3.26.2.2		
Gap Pattern Id		Config 1,2,3,4,5,6	0	4	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4,5,6	9	9	
A3-Offset	dB	Config 1,2,3,4,5,6	-6		
Hysteresis	dB	Config 1,2,3,4,5,6	0		
CP length		Config 1,2,3,4,5,6	Normal		
TimeToTrigger	s	Config 1,2,3,4,5,6	0		
Filter coefficient		Config 1,2,3,4,5,6	0		L3 filtering is not used
DRX		Config 1,2,3,4,5,6	OFF		DRX is not used
Time offset between PCell and PSCell		Config 1,2,3,4,5,6	3 μs		Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,2,3,4,5,6	3 ms		Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		Config 1,2,3,4,5,6	3 μs		Synchronous cells.
T1	s	Config 1,2,3,4,5,6	5		
T2	s	Config 1,2,3,4,5,6	1.7	1.7	

Table A.10.4.2.7.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
NR RF Channel Number		Config 1,2,3,4,5,6	1		2	
Duplex mode		Config 1,4	TDD		FDD	
		Config 2,3,5,6	TDD		TDD	
$BW_{channel}$	MHz	Config 1,2,4,5	40: $N_{RB,c}$ = 106		10: $N_{RB,c}$ = 52	
		Config 3,6	40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
BWP BW	MHz	Config 1,2,4,5	40: $N_{RB,c}$ = 106		10: $N_{RB,c}$ = 52	
		Config 3,6	40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
TDD configuration		Config 1,4	TDDConf.1.1 CCA		NA	
		Config 2,5	TDDConf.1.1 CCA		TDDConf.1.1	
		Config 3,6	TDDConf.1.1 CCA		TDDConf.2.1	
Initial DL BWP		Config 1,2,3,4,5,6	DLBWP.0.1		NA	
Initial UL BWP		Config 1,2,3,4,5,6	ULBWP.0.1		NA	

Dedicated DL BWP			Config 1,2,3,4,5,6	DLBWP.1.1	NA
Dedicated UL BWP			Config 1,2,3,4,5,6	ULBWP.1.1	NA
TRS configuration			Config 1,2,3,4,5,6	TRS.1.2 TDD	NA
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3,4,5,6	OP.1	OP.1
PDSCH Reference measurement channel			Config 1,4	SR.1.1 CCA	SR.1.1 FDD
			Config 2,5	SR.1.1 CCA	SR.1.1 TDD
			Config 3,6	SR.1.1 CCA	SR.2.1 TDD
CORESET Reference Channel			Config 1,4	CR.1.1 CCA	CR.1.1 FDD
			Config 2,5	CR.1.1 CCA	CR.1.1 TDD
			Config 3,6	CR.1.1 CCA	CR.2.1 TDD
SSB parameters	Semi-static channel access Note 5,7		Config 1,4	SSB.1 CCA	SSB.1 FR1
			Config 2,5	SSB.1 CCA	SSB.1 FR1
			Config 3,6	SSB.1 CCA	SSB.2 FR1
	Dynamic channel access Note 6,7		Config 1,4	SSB.2 CCA	SSB.1 FR1
			Config 2,5	SSB.2 CCA	SSB.1 FR1
			Config 3,6	SSB.2 CCA	SSB.2 FR1
DBT window configuration			Config 1,2,3,4,5,6	As defined in A.3.28.1	Not applicable
SMTC configuration defined in A.3.11			Config 1,4	SMTC.2	SMTC.5
			Config 2,3,5,6	SMTC.1	SMTC.4
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2,4,5	30	15
			Config 3,6	30	30
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1,2,3,4,5,6	P_{CCA_DL}=0.9375	Not applicable
	Dynamic channel access Note 6,7		Config 1,2,3,4,5,6	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	Not applicable
UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1,2,3,4,5,6	P_{CCA_UL}=1	Not applicable
	Dynamic channel access Note 6,7		Config 1,2,3,4,5,6	P_{CCA_UL}=1	Not applicable
L_{CCA_DL}			Config 1,2,3,4,5,6	12	12
W_{CCA_DL}		ms	Config 1,2,3,4,5,6	$T_{PSS/SSS_sync_inter_cca}$	$T_{PSS/SSS_sync_inter_cca}$
EPRE ratio of PSS to SSS			Config 1,2,3,4,5,6	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					

EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15kHz	Config 1,2,3,4,5,6	-104		-98	
N_{oc} Note2	dBm/SCS	Config 1,2,4,5	-101		-98	
		Config 3,6	-101		-95	
SS-RSRP Note 3	dBm/SCS	Config 1,2,4,5	-94	-94	-Infinity	-91
		Config 3,6	-91	-91	-Infinity	-88
$\hat{E}_s / I_{ot}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s / N_{oc}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
Io Note3	dBm/9.36 MHz	NR Config 1,2,4,5	-58.49	-58.49	-70.05	-62.26
	dBm/38.16MHz	NR Config 3,6	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3,4,5,6	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.

A.10.4.2.7.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_without_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_without_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2 UE is not required to report SSB time index.

$T_{identify_inter_cca_without_index} = (T_{PSS/SSS_sync_inter_cca} + T_{SSB_measurement_period_inter_cca})$ ms, where

$T_{PSS/SSS_sync_inter_cca}$: it is the time period used in PSS/SSS detection given in table 9.3A.4-1.

$T_{SSB_measurement_period_inter_cca}$: equal to a measurement period of SSB based measurement given in table 9.3A.5-1.

For test 1, MGRP = 40 ms and for test 2 MGRP = 20 ms.

SMTC period = 20 ms.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.10.4.2.8 EN-DC event triggered reporting tests for FR1 cell without SSB time index detection when DRX is used

A.10.4.2.8.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3A.4 and 9.3A.5.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 on NR RF channel 2. The test parameters and configurations are given in Tables A.10.4.2.8.1-1, A.10.4.2.8.1-2, and A.10.4.2.8.1-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table A.10.4.2.8.1-2 is provided for a UE that does not support per-FR gap and in test 3&4 measurement gap pattern configuration #4 as defined in Table A.10.4.2.8.1-2 is provided for UE that support per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 3&4. Otherwise it is only required to pass test 1&2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.1-1. Supported test configurations are shown in table A.10.4.2.8.1-1.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.10.4.2.8.1-1: EN-DC event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	E-UTRAN cell: LTE FDD NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	E-UTRAN cell: LTE FDD NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
3	E-UTRAN cell: LTE FDD NR cell without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	E-UTRAN cell: LTE TDD NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
5	E-UTRAN cell: LTE TDD NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mod
6	E-UTRAN cell: LTE TDD NR cell without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.10.4.2.8.1-2: General test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

Parameter	Unit	Test configuration	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1				One E-UTRAN carrier frequency is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1, 2				Two FR1 NR carrier frequencies are used. NR RF channel 1 is with CCA.
Active cell		Config 1,2,3,4,5,6	LTE Cell 1 (PCell) and NR cell 2 (PScell)				LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1 with CCA.
Neighbour cell		Config 1,2,3,4,5,6	NR cell 3				NR cell 3 is on NR RF channel number 2.
DL CCA model		Config 1,2,3,4,5,6	As specified in clause A.3.26.2.1				
UL CCA model		Config 1,2,3,4,5,6	As specified in clause A.3.26.2.2				
Gap Pattern Id		Config 1,2,3,4,5,6	0		4		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4,5,6	9		9		
A3-Offset	dB	Config 1,2,3,4,5,6	-6				
Hysteresis	dB	Config 1,2,3,4,5,6	0				
CP length		Config 1,2,3,4,5,6	Normal				
TimeToTrigger	s	Config 1,2,3,4,5,6	0				
Filter coefficient		Config 1,2,3,4,5,6	0				L3 filtering is not used
DRX		Config 1,2,3,4,5,6	DRX .1	DRX .2	DRX .1	DRX .2	As specified in clause A.3.3
Time offset between PCell and PSCell		Config 1,2,3,4,5,6	3 μs				Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,2,3,4,5,6	3 ms				Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		Config 1,2,3,4,5,6	3 μs				Synchronous cells.
T1	s	Config 1,2,3,4,5,6	5				
T2	s	Config 1,2,3,4,5,6	2.5	17	2.5	17	

Table A.10.4.2.8.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

Parameter	Unit	Test configuration	Cell 2				Cell 3			
			T1	T2	T3	T4	T1	T2	T3	T4
NR RF Channel Number		Config 1,2,3,4,5,6	1				2			
Duplex mode		Config 1,4	TDD				FDD			
		Config 2,3,5,6	TDD				TDD			
$BW_{channel}$	MHz	Config 1,2,4,5	40: $N_{RB,c}$ = 106				10: $N_{RB,c}$ = 52			

			Config 3,6	40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
BWP BW		MHz	Config 1,2,4,5	40: $N_{RB,c}$ = 106	10: $N_{RB,c}$ = 52
			Config 3,6	40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
TDD configuration			Config 1,4	TDDConf.1.1 CCA	NA
			Config 2,5	TDDConf.1.1 CCA	TDDConf.1.1
			Config 3,6	TDDConf.1.1 CCA	TDDConf.2.1
Initial DL BWP			Config 1,2,3,4,5,6	DLBWP.0.1	NA
Initial UL BWP			Config 1,2,3,4,5,6	ULBWP.0.1	NA
Dedicated DL BWP			Config 1,2,3,4,5,6	DLBWP.1.1	NA
Dedicated UL BWP			Config 1,2,3,4,5,6	ULBWP.1.1	NA
TRS configuration			Config 1,2,3,4,5,6	TRS.1.2 TDD	NA
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3,4,5,6	OP.1	OP.1
PDSCH Reference measurement channel			Config 1,4	SR.1.1 CCA	SR.1.1 FDD
			Config 2,5	SR.1.1 CCA	SR.1.1 TDD
			Config 3,6	SR.1.1 CCA	SR.2.1 TDD
CORESET Reference Channel			Config 1,4	CR.1.1 CCA	CR.1.1 FDD
			Config 2,5	CR.1.1 CCA	CR.1.1 TDD
			Config 3,6	CR.1.1 CCA	CR.2.1 TDD
SSB parameters	Semi-static channel access Note 5,7		Config 1,4	SSB.1 CCA	SSB.1 FR1
			Config 2,5	SSB.1 CCA	SSB.1 FR1
			Config 3,6	SSB.1 CCA	SSB.2 FR1
	Dynamic channel access Note 6,7		Config 1,4	SSB.2 CCA	SSB.1 FR1
			Config 2,5	SSB.2 CCA	SSB.1 FR1
			Config 3,6	SSB.2 CCA	SSB.2 FR1
DBT window configuration			Config 1,2,3,4,5,6	As defined in A.3.28.1	Not applicable
SMTC configuration defined in A.3.11			Config 1,4	SMTC.2	SMTC.5
			Config 2,3,5,6	SMTC.1	SMTC.4
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2,4,5	30	15
			Config 3,6	30	30
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1,2,3,4,5,6	P_{CCA_DL}=0.9375	Not applicable
	Dynamic channel access Note 6,7		Config 1,2,3,4,5,6	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	Not applicable
UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1,2,3,4,5,6	P_{CCA_UL}=1	Not applicable
	Dynamic channel access Note 6,7		Config 1,2,3,4,5,6	P_{CCA_UL}=1	Not applicable
L_{CCA_DL}			Config 1,2,3,4,5,6	5	5
W_{CCA_DL}		ms	Config 1,2,3,4,5,6	$T_{PSS/SSS_sync_inter_cca}$	$T_{PSS/SSS_sync_inter_cca}$
EPRE ratio of PSS to SSS					

EPRE ratio of PBCH DMRS to SSS		Config 1,2,3,4,5,6	0		0	
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15kHz	Config 1,2,3,4,5,6	-104		-98	
N_{oc} Note2	dBm/SCS	Config 1,2,4,5	-101		-98	
		Config 3,6	-101		-95	
SS-RSRP Note 3	dBm/SCS	Config 1,2,4,5	-94	-94	-Infinity	-91
		Config 3,6	-91	-91	-Infinity	-88
$\hat{E}_s / I_{ot}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s / N_{oc}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
Io Note3	dBm/9.36MHz	NR Config 1,2,4,5	-58.49	-58.49	-70.05	-62.26
	dBm/38.16MHz	NR Config 3,6	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3,4,5,6	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.

Table A.10.4.2.8.1-4: DRX-Configuration for SA inter-frequency event triggered reporting without SSB time index detection

Field	Test1&3	Test2&4	Comment
	Value	Value	
drx-onDurationTimer	ms1	ms1	As specified in clause 6.3.2 in TS 38.331 [2]
drx-InactivityTimer	ms1	ms1	
drx-RetransmissionTimerDL	sl1	sl1	
drx-RetransmissionTimerUL	sl1	sl1	
drx-LongCycleStartOffset	ms40	Ms640	
shortDRX	disable	disable	

Table A.10.4.2.8.1-5: *TimeAlignmentTimer* -Configuration SA inter-frequency event triggered reporting without SSB time index detection

Field	Value	Comment
TimeAlignmentTimer	ms500	As specified in clause 6.3.2 in TS 38.331 [2]

A.10.4.2.8.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_without_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_without_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 3 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_without_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 4 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_without_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1, 2, 3 and 4 UE is not required to report SSB time index.

$T_{identify_inter_cca_without_index} = (T_{PSS/SSS_sync_inter_cca} + T_{SSB_measurement_period_inter_cca})$ ms, where

$T_{PSS/SSS_sync_inter_cca}$: it is the time period used in PSS/SSS detection given in table 9.3A.4-1.

$T_{SSB_measurement_period_inter_cca}$: equal to a measurement period of SSB based measurement given in table 9.3A.5-1.

For tests 1 and 2, MGRP = 40 ms and for tests 3 and 4 MGRP = 20 ms.

For tests 1 and 3, DRX cycle = 40 ms and for tests 2 and 4 DRX cycle = 640 ms.

SMTC period = 20 ms.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.10.4.2.9 EN-DC event triggered reporting tests for FR1 cell with SSB time index detection when DRX is not used

A.10.4.2.9.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3A.4 and 9.3A.5.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 on NR RF channel 2. The test parameters and configurations are given in Tables A.10.4.2.9.1-1, A.10.4.2.9.1-2, and A.10.4.2.9.1-3.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.10.4.2.9.1-2 is provided for a UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #4 as defined in Table A.10.4.2.9.1-2 is provided for UE that support per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 2. Otherwise it is only required to pass test 1.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.1-1. Supported test configurations are shown in table A.10.4.2.9.1-1.

Table A.10.4.2.9.1-1: EN-DC event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	E-UTRAN cell: LTE FDD NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	E-UTRAN cell: LTE FDD NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
3	E-UTRAN cell: LTE FDD NR cell without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	E-UTRAN cell: LTE TDD NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
5	E-UTRAN cell: LTE TDD NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mod
6	E-UTRAN cell: LTE TDD NR cell without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.10.4.2.9.1-2: General test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1		One E-UTRAN carrier frequency is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1, 2		Two FR1 NR carrier frequencies are used. NR RF channel 1 is with CCA.
Active cell		Config 1,2,3,4,5,6	LTE Cell 1 (PCell) and NR cell 2 (PScell)		LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1 with CCA.
Neighbour cell		Config 1,2,3,4,5,6	NR cell 3		NR cell 3 is on NR RF channel number 2.
DL CCA model		Config 1,2,3,4,5,6	As specified in clause A.3.26.2.1		
UL CCA model		Config 1,2,3,4,5,6	As specified in clause A.3.26.2.2		
Gap Pattern Id		Config 1,2,3,4,5,6	0	4	As specified in clause 9.1.2-1.

Measurement gap offset		Config 1,2,3,4,5,6	9	9	
A3-Offset	dB	Config 1,2,3,4,5,6	-6		
Hysteresis	dB	Config 1,2,3,4,5,6	0		
CP length		Config 1,2,3,4,5,6	Normal		
TimeToTrigger	s	Config 1,2,3,4,5,6	0		
Filter coefficient		Config 1,2,3,4,5,6	0		L3 filtering is not used
DRX		Config 1,2,3,4,5,6	OFF		DRX is not used
Time offset between PCell and PSCell		Config 1,2,3,4,5,6	3 μs		Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,2,3,4,5,6	3 ms		Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		Config 1,2,3,4,5,6	3 μs		Synchronous cells.
T1	s	Config 1,2,3,4,5,6	5		
T2	s	Config 1,2,3,4,5,6	2	2	

Table A.10.4.2.9.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
NR RF Channel Number		Config 1,2,3,4,5,6	1		2	
Duplex mode		Config 1,4	TDD		FDD	
		Config 2,3,5,6	TDD		TDD	
$BW_{channel}$	MHz	Config 1,2,4,5	40: $N_{RB,c}$ = 106		10: $N_{RB,c}$ = 52	
		Config 3,6	40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
BWP BW	MHz	Config 1,2,4,5	40: $N_{RB,c}$ = 106		10: $N_{RB,c}$ = 52	
		Config 3,6	40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
TDD configuration		Config 1,4	TDDConf.1.1 CCA		NA	
		Config 2,5	TDDConf.1.1 CCA		TDDConf.1.1	
		Config 3,6	TDDConf.1.1 CCA		TDDConf.2.1	
Initial DL BWP		Config 1,2,3,4,5,6	DLBWP.0.1		NA	
Initial UL BWP		Config 1,2,3,4,5,6	ULBWP.0.1		NA	
Dedicated DL BWP		Config 1,2,3,4,5,6	DLBWP.1.1		NA	
Dedicated UL BWP		Config 1,2,3,4,5,6	ULBWP.1.1		NA	
TRS configuration		Config 1,2,3,4,5,6	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		Config 1,2,3,4,5,6	OP.1		OP.1	
PDSCH Reference measurement channel		Config 1,4	SR.1.1 CCA		SR.1.1 FDD	
		Config 2,5	SR.1.1 CCA		SR.1.1 TDD	
		Config 3,6	SR.1.1 CCA		SR.2.1 TDD	
CORESET Reference Channel		Config 1,4	CR.1.1 CCA		CR.1.1 FDD	
		Config 2,5	CR.1.1 CCA		CR.1.1 TDD	

			Config 3,6	CR.1.1 CCA		CR.2.1 TDD	
SSB parameters	Semi-static channel access Note 5,7		Config 1,4	SSB.1 CCA		SSB.1 FR1	
			Config 2,5	SSB.1 CCA		SSB.1 FR1	
			Config 3,6	SSB.1 CCA		SSB.2 FR1	
	Dynamic channel access Note 6,7		Config 1,4	SSB.2 CCA		SSB.1 FR1	
			Config 2,5	SSB.2 CCA		SSB.1 FR1	
			Config 3,6	SSB.2 CCA		SSB.2 FR1	
DBT window configuration			Config 1,2,3,4,5,6	As defined in A.3.28.1		Not applicable	
SMTC configuration defined in A.3.11			Config 1,4	SMTC.2		SMTC.5	
			Config 2,3,5,6	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2,4,5	30		15	
			Config 3,6	30		30	
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1,2,3,4,5,6	P_{CCA_DL}=0.9375		Not applicable	
	Dynamic channel access Note 6,7		Config 1,2,3,4,5,6	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		Not applicable	
UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1,2,3,4,5,6	P_{CCA_UL}=1		Not applicable	
	Dynamic channel access Note 6,7		Config 1,2,3,4,5,6	P_{CCA_UL}=1		Not applicable	
L_{CCA_DL}			Config 1,2,3,4,5,6	5		5	
W_{CCA_DL}		ms	Config 1,2,3,4,5,6	$T_{PSS/SSS_sync_inter_cca}$		$T_{PSS/SSS_sync_inter_cca}$	
EPRE ratio of PSS to SSS			Config 1,2,3,4,5,6	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		dBm/15kHz	Config 1,2,3,4,5,6	-104		-98	
N_{oc} Note2		dBm/SCS	Config 1,2,4,5	-101		-98	
			Config 3,6	-101		-95	
SS-RSRP Note 3		dBm/SCS	Config 1,2,4,5	-94	-94	-Infinity	-91
			Config 3,6	-91	-91	-Infinity	-88
$\hat{E}_s / I_{ot}$		dB	Config 1,2,3,4,5,6	4	4	-Infinity	7

$\hat{E}_s / N_{oc}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
Io[Note3]	dBm/9.36 MHz	NR Config 1,2,4,5	-58.49	-58.49	-70.05	-62.26
	dBm/38.16MHz	NR Config 3,6	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3,4,5,6	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.

A.10.4.2.9.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_with_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_with_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2 UE is required to report SSB time index.

$T_{identify_inter_cca_with_index} = (T_{PSS/SSS_sync_inter_cca} + T_{SSB_measurement_period_inter_cca} + T_{SSB_time_index_inter_cca})$ ms, where

$T_{PSS/SSS_sync_inter_cca}$: it is the time period used in PSS/SSS detection given in table 9.3A.4-1.

$T_{SSB_time_index_inter_cca}$: it is the time period used to acquire the index of the SSB being measured given in table 9.3A.4-2.

$T_{SSB_measurement_period_inter_cca}$: equal to a measurement period of SSB based measurement given in table 9.3A.5-1.

For test 1, MGRP = 40 ms and for test 2 MGRP = 20 ms.

SMTC period = 20 ms.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.10.4.2.10 EN-DC event triggered reporting tests for FR1 cell with SSB time index detection when DRX is used

A.10.4.2.10.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3A.4 and 9.3A.5.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 on NR RF channel 2. The test parameters and configurations are given in Tables A.10.4.2.10.1-1, A.10.4.2.10.1-2, and A.10.4.2.10.1-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table A.10.4.2.10.1-2 is provided for a UE that does not support per-FR gap and in test 3&4 measurement gap pattern configuration #4 as defined in Table A.10.4.2.10.1-2 is provided for UE that support per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 3&4. Otherwise it is only required to pass test 1&2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.1-1. Supported test configurations are shown in table A.10.4.2.10.1-1.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.10.4.2.10.1-1: EN-DC event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	E-UTRAN cell: LTE FDD NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	E-UTRAN cell: LTE FDD NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
3	E-UTRAN cell: LTE FDD NR cell without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	E-UTRAN cell: LTE TDD NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
5	E-UTRAN cell: LTE TDD NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mod
6	E-UTRAN cell: LTE TDD NR cell without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.10.4.2.10.1-2: General test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

Parameter	Unit	Test	Value	Comment

		configuration	Test 1	Test 2	Test 3	Test 4	
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1				One E-UTRAN carrier frequency is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1, 2				Two FR1 NR carrier frequencies are used. NR RF channel 1 is with CCA.
Active cell		Config 1,2,3,4,5,6	LTE Cell 1 (PCell) and NR cell 2 (PScell)				LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1 with CCA.
Neighbour cell		Config 1,2,3,4,5,6	NR cell 3				NR cell 3 is on NR RF channel number 2.
DL CCA model		Config 1,2,3,4,5,6	As specified in clause A.3.26.2.1				
UL CCA model		Config 1,2,3,4,5,6	As specified in clause A.3.26.2.2				
Gap Pattern Id		Config 1,2,3,4,5,6	0		4		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4,5,6	9		9		
A3-Offset	dB	Config 1,2,3,4,5,6	-6				
Hysteresis	dB	Config 1,2,3,4,5,6	0				
CP length		Config 1,2,3,4,5,6	Normal				
TimeToTrigger	s	Config 1,2,3,4,5,6	0				
Filter coefficient		Config 1,2,3,4,5,6	0				L3 filtering is not used
DRX		Config 1,2,3,4,5,6	DRX .1	DRX .2	DRX .1	DRX .2	As specified in clause A.3.3
Time offset between PCell and PSCell		Config 1,2,3,4,5,6	3 μs				Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,2,3,4,5,6	3 ms				Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		Config 1,2,3,4,5,6	3 μs				Synchronous cells.
T1	s	Config 1,2,3,4,5,6	5				
T2	s	Config 1,2,3,4,5,6	3	20	3	20	

Table A.10.4.2.10.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

Parameter	Unit	Test configuration	Cell 2				Cell 3			
			T1	T2	T3	T4	T1	T2	T3	T4
NR RF Channel Number		Config 1,2,3,4,5,6	1				2			
Duplex mode		Config 1,4	TDD				FDD			
		Config 2,3,5,6	TDD				TDD			
$BW_{channel}$	MHz	Config 1,2,4,5	40: $N_{RB,c}$ = 106				10: $N_{RB,c}$ = 52			
		Config 3,6	40: $N_{RB,c}$ = 106				40: $N_{RB,c}$ = 106			
BWP BW	MHz	Config 1,2,4,5	40: $N_{RB,c}$ = 106				10: $N_{RB,c}$ = 52			
		Config 3,6	40: $N_{RB,c}$ = 106				40: $N_{RB,c}$ = 106			

TDD configuration			Config 1,4	TDDConf.1.1 CCA	NA
			Config 2,5	TDDConf.1.1 CCA	TDDConf.1.1
			Config 3,6	TDDConf.1.1 CCA	TDDConf.2.1
Initial DL BWP			Config 1,2,3,4,5,6	DLBWP.0.1	NA
Initial UL BWP			Config 1,2,3,4,5,6	ULBWP.0.1	NA
Dedicated DL BWP			Config 1,2,3,4,5,6	DLBWP.1.1	NA
Dedicated UL BWP			Config 1,2,3,4,5,6	ULBWP.1.1	NA
TRS configuration			Config 1,2,3,4,5,6	TRS.1.2 TDD	NA
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3,4,5,6	OP.1	OP.1
PDSCH Reference measurement channel			Config 1,4	SR.1.1 CCA	SR.1.1 FDD
			Config 2,5	SR.1.1 CCA	SR.1.1 TDD
			Config 3,6	SR.1.1 CCA	SR.2.1 TDD
CORESET Reference Channel			Config 1,4	CR.1.1 CCA	CR.1.1 FDD
			Config 2,5	CR.1.1 CCA	CR.1.1 TDD
			Config 3,6	CR.1.1 CCA	CR.2.1 TDD
SSB parameters	Semi-static channel access Note 5,7		Config 1,4	SSB.1 CCA	SSB.1 FR1
			Config 2,5	SSB.1 CCA	SSB.1 FR1
			Config 3,6	SSB.1 CCA	SSB.2 FR1
	Dynamic channel access Note 6,7		Config 1,4	SSB.2 CCA	SSB.1 FR1
			Config 2,5	SSB.2 CCA	SSB.1 FR1
			Config 3,6	SSB.2 CCA	SSB.2 FR1
DBT window configuration			Config 1,2,3,4,5,6	As defined in A.3.28.1	Not applicable
SMTC configuration defined in A.3.11			Config 1,4	SMTC.2	SMTC.5
			Config 2,3,5,6	SMTC.1	SMTC.4
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2,4,5	30	15
			Config 3,6	30	30
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1,2,3,4,5,6	P_{CCA_DL}=0.9375	Not applicable
	Dynamic channel access Note 6,7		Config 1,2,3,4,5,6	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	Not applicable
UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1,2,3,4,5,6	P_{CCA_UL}=1	Not applicable
	Dynamic channel access Note 6,7		Config 1,2,3,4,5,6	P_{CCA_UL}=1	Not applicable
L_{CCA_DL}			Config 1,2,3,4,5,6	2	2
W_{CCA_DL}		ms	Config 1,2,3,4,5,6	$T_{PSS/SSS_sync_inter_cca}$	$T_{PSS/SSS_sync_inter_cca}$
EPRE ratio of PSS to SSS					
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					

EPRE ratio of PDCCH DMRS to SSS		Config 1,2,3,4,5,6	0		0	
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15kHz	Config 1,2,3,4,5,6	-104		-98	
N_{oc} Note2	dBm/SCS	Config 1,2,4,5	-101		-98	
		Config 3,6	-101		-95	
SS-RSRP Note 3	dBm/SCS	Config 1,2,4,5	-94	-94	-Infinity	-91
		Config 3,6	-91	-91	-Infinity	-88
$\hat{E}_s / I_{ot}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s / N_{oc}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
Io Note3	dBm/9.36 MHz	NR Config 1,2,4,5	-58.49	-58.49	-70.05	-62.26
	dBm/38.16MHz	NR Config 3,6	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3,4,5,6	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.

Table A.10.4.2.10.1-4: DRX-Configuration for SA inter-frequency event triggered reporting without SSB time index detection

Field	Test1&3	Test2&4	Comment
	Value	Value	
drx-onDurationTimer	ms1	ms1	As specified in clause 6.3.2 in TS 38.331 [2]
drx-InactivityTimer	ms1	ms1	
drx-RetransmissionTimerDL	sl1	sl1	
drx-RetransmissionTimerUL	sl1	sl1	
drx-LongCycleStartOffset	ms40	Ms640	
shortDRX	disable	disable	

Table A.10.4.2.10.1-5: *TimeAlignmentTimer* -Configuration SA inter-frequency event triggered reporting without SSB time index detection

Field	Value	Comment
TimeAlignmentTimer	ms500	As specified in clause 6.3.2 in TS 38.331 [2]

A.10.4.2.10.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_with_}$from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_with_}$from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 3 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_with_}$from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 4 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_with_}$from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1, 2, 3 and 4 UE is required to report SSB time index.

$T_{identify_inter_cca_with_index} = (T_{PSS/SSS_sync_inter_cca} + T_{SSB_measurement_period_inter_cca} + T_{SSB_time_index_inter_cca})$ ms, where

$T_{PSS/SSS_sync_inter_cca}$: it is the time period used in PSS/SSS detection given in table 9.3A.4-1.

$T_{SSB_time_index_inter_cca}$: it is the time period used to acquire the index of the SSB being measured given in table 9.3A.4-2.

$T_{SSB_measurement_period_inter_cca}$: equal to a measurement period of SSB based measurement given in table 9.3A.5-1.

For tests 1 and 2, MGRP = 40 ms and for tests 3 and 4 MGRP = 20 ms.

For tests 1 and 3, DRX cycle = 40 ms and for tests 2 and 4 DRX cycle = 640 ms.

SMTC period = 20 ms.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.10.4.3 L1-RSRP measurements for beam reporting

A.10.4.3.1 SSB based L1-RSRP measurement on PSCC when DRX is not used

A.10.4.3.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5A.4.1, with the testing configurations for NR cells in Table A.10.4.3.1.1-1.

Table A.10.4.3.1.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
1	LTE FDD With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	LTE TDD With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.10.4.3.1.2 Test parameters

There are two cells in the test, E-UTRAN Pcell (Cell 1) and FR1 PSCell (Cell 2) which operates on a carrier frequency with CCA and transmits SSBs in DBT window according to DL CCA model. The test parameters and applicability for Cell 1 are defined in A.3.7A.2. The test parameters for the Cell 2 are given in Table A.10.4.3.1.2-1 and Table A.10.4.3.1.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The UE transmits the reporting according to UL CCA model. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.10.4.3.1.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1,2		freq1
DL CCA model	1,2		As specifieed in A.3.20.2.1
UL CCA model	1,2		As specified in A.3.20.2.2
Duplex mode	1,2		TDD
TDD Configuration	1,2		TDDConf.1.1 CCA
$BW_{channel}$	1,2	MHz	40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1,2		SR.1.1 CCA
RMSI CORESET Reference Channel	1,2		CR.1.1 CCA
Dedicated CORESET Reference Channel	1,2		CCR.1.1 CCA
SSB configuration	1,2		SSB.3 CCA for semi-static channel access

			SSB.4 CCA for dynamic channel access
OCNG Patterns	1,2		OP.1
Initial BWP Configuration	1,2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1,2		DLBWP.1.1 ULBWP.1.1
DBT Window Configuration	1,2		DBT.1
TRS Configuration	1,2		TRS.1.2 TDD
DRX configuration	1,2		Off
reportConfigType	1,2		periodic
reportQuantity	1,2		ssb-Index-RSRP
Number of reported RS	1,2		2
L1-RSRP reporting period	1,2	slot	80
T1	1,2	s	5
T2	1,2	s	1
EPRE ratio of PSS to SSS	1,2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1,2		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.			

Table A.10.4.3.1.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
DL CCA Probability P_{CCA_DL} Note 4,6	1,2		0.9375	0.9375	0.9375	0.9375
DL CCA Probability P_{CCA_DL} Note 4.7	1,2		0.75/0.75	0.75/0.75	0.75/0.75	0.75/0.75
UL CCA probability P_{CCA_UL}	1,2		1.0	1.0	1.0	1.0
N_{oc} Note2	1,2	dBm/15kHz	-94.65			
N_{oc} Note2	1,2	dBm/SSB SCS	-91.65			
$\hat{E}_s / I_{ot}$	1,2	dB	0	0	-Infinity	3
SSB RSRP Note3	1,2	dBm/SSB SCS	-91.65	-91.65	-Infinity	-88.65

Io Note3	1,2	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.84
$\hat{E}_s / N_{oc}$	1,2	dB	0	0	-Infinity	3

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: DL and UL CCA probabilities apply for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.
Note 5: The signal levels apply for SSS Res when the discovery burst is transmitted during DBT windows.
Note 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2}.

A.10.4.3.1.3 Test Requirements

The UE shall send L1-RSRP report every 80 slots. No later than 640 ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute accuracy requirement in clause 10.1.19.1.1 and relative accuracy requirement in clause 10.1.19.1.2. The rate of correct events observed during repeated tests shall be at least 90%.

The UE shall send L1-RSRP report of both SSB0 and SSB1 in Cell 2.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.10.4.3.2 SSB based L1-RSRP measurement on PSCC when DRX is used

A.10.4.3.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5A.4.1, with the testing configurations for NR cells in Table A.10.4.3.1.1-1.

Table A.10.4.3.2.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
1	LTE FDD With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	LTE TDD With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.10.4.3.2.2 Test parameters

There are two cells in the test, E-UTRAN Pcell (Cell 1) and FR1 PSCell (Cell 2) which operates on a carrier frequency with CCA and transmits SSBs in DBT window according to DL CCA model. The test parameters and applicability for Cell 1 are defined in A.3.7A.2. The test parameters for the Cell 2 are given in Table A.10.4.3.2.2-1 and Table A.10.4.3.2.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The UE transmits the reporting according to UL CCA model. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.10.4.3.2.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1,2		freq1
DL CCA model	1,2		As specifieed in A.3.20.2.1
UL CCA model	1,2		As specified in A.3.20.2.2
Duplex mode	1,2		TDD
TDD Configuration	1,2		TDDConf.1.1 CCA
$BW_{channel}$	1,2	MHz	40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1,2		SR.1.1 CCA
RMSI CORESET Reference Channel	1,2		CR.1.1 CCA
Dedicated CORESET Reference Channel	1,2		CCR.1.1 CCA
SSB configuration	1,2		SSB.3 CCA for semi-static channel access SSB.4 CCA for dynamic channel access
OCNG Patterns	1,2		OP.1
Initial BWP Configuration	1,2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1,2		DLBWP.1.1 ULBWP.1.1
DBT Window Configuration	1,2		DBT.1
TRS Configuration	1,2		TRS.1.2 TDD
DRX configuration	1,2		DRX.3
reportConfigType	1,2		periodic
reportQuantity	1,2		ssb-Index-RSRP
Number of reported RS	1,2		2
L1-RSRP reporting period	1,2	slot	80
T1	1,2	s	5
T2	1,2	s	1
EPRE ratio of PSS to SSS	1,2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			

EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1,2		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.			

Table A.10.4.3.2.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
DL CCA Probability P_{CCA_DL} Note 4,6	1,2		0.9375	0.9375	0.9375	0.9375
DL CCA Probability P_{CCA_DL} Note 4.7	1,2		0.75/0.75	0.75/0.75	0.75/0.75	0.75/0.75
UL CCA probability P_{CCA_UL}	1,2		1.0	1.0	1.0	1.0
N_{oc} Note2	1,2	dBm/15kHz	-94.65			
N_{oc} Note2	1,2	dBm/SSB SCS	-91.65			
$\hat{E}_s / I_{ot}$	1,2	dB	0	0	-Infinity	3
SSB RSRP Note3	1,2	dBm/SSB SCS	-91.65	-91.65	-Infinity	-88.65
Io Note3	1,2	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.84
$\hat{E}_s / N_{oc}$	1,2	dB	0	0	-Infinity	3

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: DL and UL CCA probabilities apply for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

Note 5: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.

Note 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2}.

A.10.4.3.2.3 Test Requirements

The UE shall send L1-RSRP report every 80 slots. No later than 640 ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute accuracy requirement in clause 10.1.19.1.1 and relative accuracy requirement in clause 10.1.19.1.2. The rate of correct events observed during repeated tests shall be at least 90%.

The UE shall send L1-RSRP report of both SSB0 and SSB1 in Cell 2.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.10.4.3.3 SSB based L1-RSRP measurement on SCC when DRX is not used

A.10.4.3.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5A.4.1, with the testing configurations for NR cells in Table A.10.4.3.1.1-1.

Table A.10.4.3.3.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
1	LTE FDD With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	LTE TDD With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.10.4.3.3.2 Test parameters

There are three cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2), and FR1 SCell (Cell 3). Cell 2 and Cell 3 operate on a carrier frequency with CCA and transmits SSBs in DBT window according to DL CCA model. The test parameters and applicability for Cell 1 are defined in A.3.7A.2. The test parameters for the Cell 2 and Cell 3 are given in Table A.10.4.3.3.2-1 and Table A.10.4.3.3.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The UE transmits the reporting according to UL CCA model. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.10.4.3.3.2-1: General test parameters

Parameter	Config	Unit	Value
Active PScell	1,2		Cell 2
Active Scell	1,2		Cell 3
RF Channel Number	1,2		1: Cell 2 2: Cell 3
DL CCA model	1,2		As specifieed in A.3.20.2.1

UL CCA model	1,2		As specified in A.3.20.2.2
Duplex mode	1,2		TDD
TDD Configuration	1,2		TDDConf.1.1 CCA
$BW_{channel}$	1,2	MHz	40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1,2		SR.1.1 CCA
RMSI CORESET Reference Channel	1,2		CR.1.1 CCA
Dedicated CORESET Reference Channel	1,2		CCR.1.1 CCA
SSB configuration	1,2		SSB.3 CCA for semi-static channel access SSB.4 CCA for dynamic channel access
OCNG Patterns	1,2		OP.1
Initial BWP Configuration	1,2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1,2		DLBWP.1.1 ULBWP.1.1
DBT Window Configuration	1,2		DBT.1
TRS Configuration	1,2		TRS.1.2 TDD
DRX configuration	1,2		Off
reportConfigType	1,2		periodic
reportQuantity	1,2		ssb-Index-RSRP
Number of reported RS	1,2		2
L1-RSRP reporting period	1,2	slot	80
T1	1,2	s	5
T2	1,2	s	1
EPRE ratio of PSS to SSS	1,2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1,2		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.			

Table A.10.4.3.3.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2

DL CCA Probability P_{CCA_DL} Note 4,6	1, 2		0.9375	0.9375	0.9375	0.9375
DL CCA Probability P_{CCA_DL} Note 4.7	1, 2		0.75/0.75	0.75/0.75	0.75/0.75	0.75/0.75
UL CCA probability P_{CCA_UL}	1, 2		1.0	1.0	1.0	1.0
N_{oc} Note2	1, 2	dBm/15kHz	-94.65			
N_{oc} Note2	1, 2	dBm/SSB SCS	-91.65			
$\hat{E}_s / I_{ot}$	1, 2	dB	0	0	-Infinity	3
SSB RSRP Note3	1, 2	dBm/SSB SCS	-91.65	-91.65	-Infinity	-88.65
Io Note3	1, 2	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.84
$\hat{E}_s / N_{oc}$	1, 2	dB	0	0	-Infinity	3

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: DL and UL CCA probabilities apply for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.
Note 5: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.
Note 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2}.

A.10.4.3.3.3 Test Requirements

The UE shall send L1-RSRP report every 80 slots. No later than 640 ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute accuracy requirement in clause 10.1.19.1.1 and relative accuracy requirement in clause 10.1.19.1.2. The rate of correct events observed during repeated tests shall be at least 90%.

The UE shall send L1-RSRP report of both SSB0 and SSB1 in Cell 3.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.10.4.3.4 SSB based L1-RSRP measurement on SCC when DRX is used

A.10.4.3.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5A.4.1, with the testing configurations for NR cells in Table A.10.4.3.4.1-1.

Table A.10.4.3.4.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
1	LTE FDD With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	LTE TDD With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.10.4.3.4.2 Test parameters

There are three cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2), and FR1 SCell (Cell 3). Cell 2 and Cell 3 operate on a carrier frequency with CCA and transmits SSBs in DBT window according to DL CCA model. The test parameters and applicability for Cell 1 are defined in A.3.7A.2. The test parameters for the Cell 2 and Cell 3 are given in Table A.10.4.3.4.2-1 and Table A.10.4.3.4.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The UE transmits the reporting according to UL CCA model. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.10.4.3.4.2-1: General test parameters

Parameter	Config	Unit	Value
Active PScell	1,2		Cell 2
Active Scell	1,2		Cell 3
RF Channel Number	1,2		1: Cell 2 2: Cell 3
DL CCA model	1,2		As specifieed in A.3.20.2.1
UL CCA model	1,2		As specified in A.3.20.2.2
Duplex mode	1,2		TDD
TDD Configuration	1,2		TDDConf.1.1 CCA
$BW_{channel}$	1,2	MHz	40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1,2		SR.1.1 CCA
RMSI CORESET Reference Channel	1,2		CR.1.1 CCA
Dedicated CORESET Reference Channel	1,2		CCR.1.1 CCA
SSB configuration	1,2		SSB.3 CCA for semi-static channel access SSB.4 CCA for dynamic channel access
OCNG Patterns	1,2		OP.1
Initial BWP Configuration	1,2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1,2		DLBWP.1.1 ULBWP.1.1

DBT Window Configuration	1,2		DBT.1
TRS Configuration	1,2		TRS.1.2 TDD
DRX configuration	1,2		DRX.3
reportConfigType	1,2		periodic
reportQuantity	1,2		ssb-Index-RSRP
Number of reported RS	1,2		2
L1-RSRP reporting period	1,2	slot	80
T1	1,2	s	5
T2	1,2	s	1
EPRE ratio of PSS to SSS	1,2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1,2		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.			

Table A.10.4.3.4.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
DL CCA Probability P_{CCA_DL} Note 4,6	1, 2		0.9375	0.9375	0.9375	0.9375
DL CCA Probability P_{CCA_DL} Note 4.7	1, 2		0.75/0.75	0.75/0.75	0.75/0.75	0.75/0.75
UL CCA probability P_{CCA_UL}	1, 2		1.0	1.0	1.0	1.0
N_{oc} Note2	1, 2	dBm/15kHz	-94.65			
N_{oc} Note2	1, 2	dBm/SSB SCS	-91.65			
$\hat{E}_s / I_{ot}$	1, 2	dB	0	0	-Infinity	3
SSB RSRP Note3	1, 2	dBm/SSB SCS	-91.65	-91.65	-Infinity	-88.65
Io Note3	1, 2	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.84
$\hat{E}_s / N_{oc}$	1, 2	dB	0	0	-Infinity	3
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						

Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	DL and UL CCA probabilities apply for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.
Note 5:	The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.
Note 6:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 7:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2}.

A.10.4.3.4.3 Test Requirements

The UE shall send L1-RSRP report every 80 slots. No later than 640 ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute accuracy requirement in clause 10.1.19.1.1 and relative accuracy requirement in clause 10.1.19.1.2. The rate of correct events observed during repeated tests shall be at least 90%.

The UE shall send L1-RSRP report of both SSB0 and SSB1 in Cell 3.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.10.4.4 E-UTRAN–NR inter-RAT measurements on NR carrier frequency under CCA

A.10.4.4.1 E-UTRA-NR inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is not used

A.10.4.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.1.2.4.21A of TS 36.133 [15] for E-UTRAN FDD-NR measurements under CCA and clause 8.1.2.4.22A of TS 36.133 [15] for E-UTRAN TDD-NR measurements under CCA.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 with CCA on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 with CCA on NR RF channel 2. The test parameters are given in Tables A.10.4.4.1.1-1, A.10.4.4.1.1-2, A.10.4.4.1.1-3 and A.10.4.4.1.1-4. Cell transmits SSBs in DBT windows according to DL CCA model.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.10.4.4.1.1-2 is provided for UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #4 as defined in Table A.10.4.4.1.1-2 is provided for UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) [16] is used. The UE is tested when MeasTriggerQuantity is configured as RSRP, RSRQ and SINR for each test. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

Table A.10.4.4.1.1-1: NR inter-RAT event triggered reporting tests without SSB index reading for FR1

Configuration	Description
1	LTE FDD; NR with CCA: SCS 30 kHz, BW 40 MHz, TDD
2	LTE TDD; NR with CCA: SCS 30 kHz, BW 40 MHz, TDD
NOTE: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.10.4.4.1.1-2: General test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

Parameter		Unit	Test configuration	Value		Comment
				Test 1	Test 2	
E-UTRA RF Channel Number			1, 2	1		One E-UTRAcarrier frequency is used.
NR RF Chanel Number			1, 2	1,2		Two FR1 NR carrier frequency under CCA is used.
DL CCA model	Dynamic channel access Note 3, 5			As specified in clause A.3.26.2.1		
	Semi-static channel access Note 4, 5					
UL CCA model	Dynamic channel access Note 3, 5			As specified in clause A.3.26.2.2		
	Semi-static channel access Note 4, 5					
Active cell			1, 2	E-UTRA cell 1 (PCell) and NR cell 2 with CCA (PSCell)		E-UTRA cell 1 is on E-UTRA RF channel number 1.
Neighbour cell			1, 2	NR cell 3		NR cell 3 is on NR RF channel number 2.
Gap Pattern Id			1, 2	0	4	As specified in clause Table 8.1.2.1-1 of TS 36.133 [15].
Measurement gap offset			1, 2	39	19	As specified in TS 36.331 [16].
b2-Threshold1		dBm	1, 2	Note 1		E-UTRA RSRP/RSRQ/SINR threshold for E-UTRA RSRP measurement on cell 1 for event B2 [16]
b2-Threshold2NR		dBm	1, 2	Note 2		SS-RSRP/ SS-RSRQ/ SS-SINR threshold measurement on cell 3 for event B2 [16]
Hysteresis		dB	1, 2	0		
CP length			1, 2	Normal		
TimeToTrigger		s	1, 2	0		
Filter coefficient			1, 2	0		L3 filtering is not used
DRX			1, 2	OFF		DRX is not used

Time offset between serving and neighbour cells		1, 2	3μs		Synchronous cells.
T1	s	1, 2	5		
T2	s	1, 2	≥$T_{identify_irat_cca_without_index}$	≥$T_{identify_irat_cca_without_index}$	$T_{identify_irat_cca_without_index}$ is defined in clause 8.1.2.4.21A.1 and 8.1.2.4.22A.1 in TS 36.133
NOTE 1: The value of b2-Threshold1 is defined in Table A.10.4.4.1.1-3 NOTE 2: The value of b2-Threshold2NR is defined in Table A.10.4.4.1.1-4 NOTE 3: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy. NOTE 4: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy. NOTE 5: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.					

Table A.10.4.4.1.1-3: E-UTRAN PCell specific test parameters for NR inter-RAT event triggered reporting in non-DRX with NR neigbour cell in FR1 without SSB time index detection

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2	1	
Duplex mode		1	FDD	
		2	TDD	
TDD special subframe configuration[Note1]		2	6	
TDD uplink-downlink configuration[Note1]		2	1	
$BW_{channel}$	MHz	1, 2	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note2]		1	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		2	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		1	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		2	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]		1	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		2	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
b2-Threshold1	dBm	1, 2	-77 for RSRP	
	dB	1, 2	77 for RSRQ	
	dB	1, 2	90 for SINR	
PBCH_RA	dB	1, 2	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				

PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA Note3				
OCNG_RB Note3				
N_{oc} Note4	dBm/15kHz	1, 2	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2	17	17
$\hat{E}_s/I_{ot}$ Note5	dB	1, 2	17	17
RSRP Note5	dBm/15kHz	1, 2	-87	-87
SCH_RP Note5	dBm/15kHz	1, 2	-87	-87
Io Note5	dBm/9MHz	1, 2	-59.13+10log ($N_{RB,c}$ /50)	-59.13+10log ($N_{RB,c}$ /50)
Propagation Condition Note6		1, 2	ETU70	
Antenna Configuration and Correlation Matrix Note6		1, 2	1x2 Low	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].

Table A.10.4.4.1.1-4: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T2	T2
NR RF Channel Number		1, 2	2		3	
TDD configuration		1, 2	TDDConf.1.1 CCA		TDDConf.1.1 CCA	
$BW_{channel}$	MHz	1, 2	40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
P_{CCA_DL} for dynamic channel access Note 6,8		1, 2	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	
P_{CCA_DL} for semi-static channel access Note 7,8		1, 2	P_{CCA_DL}=0.9375		P_{CCA_DL}=0.9375	
P_{CCA_UL} for dynamic channel access Note 6,8		1, 2	1		1	
P_{CCA_UL} for semi-static channel access Note 7,8		1, 2	1		1	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		1, 2	OP.1		OP.1	
SMTC configuration defined in A.3.11.1 and A.3.11.2		1, 2	SMTC.1		SMTC.1	
DBT window configuration		1, 2	DBT.1		DBT.1	
SSB configuration for semi-static channel access		1, 2	SSB.1 CCA		SSB.1 CCA	
SSB configuration for dynamic channel access		1, 2	SSB.2 CCA		SSB.2 CCA	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	30		30	
b2-Threshold2NR	dBm	1, 2	NA		-98 for SS-RSRP	
	dB	1, 2	NA		55 for SS-RSRQ	
		1, 2	NA		50 for SS-SINR	
EPRE ratio of PSS to SSS		1, 2	0		0	
EPRE ratio of PBCH DMRS to SSS						

EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS (Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15kHz	1, 2	-98		-98	
N_{oc} Note2	dBm/SCS	1, 2	-95		-95	
SS-RSRP Note 3,5	dBm/SCS	1, 2	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$ Note 5	dB	1, 2	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$ Note 5	dB	1, 2	4	4	-Infinity	7
Io Note3	dBm/38.16MHz	1, 2	-58.49	-58.49	-63.95	-56.16
Propagation Condition		1, 2	ETU70		ETU70	
Antenna Configuration and Correlation Matrix		1, 2,	1x2 Low		1x2 Low	

NOTE 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
NOTE 5: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.
NOTE 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
NOTE 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
NOTE 8: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

A.10.4.4.1.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than $T_{identify_irat_cca_without_index}$ ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-FR gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than $T_{identify_irat_cca_without_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and test 2, the UE is not required to report SSB time index. $T_{identify_irat_cca_without_index}$ is defined in defined in clause 8.1.2.4.21A.1 and 8.1.2.4.22A.1 in TS 36.133.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.10.4.4.2 E-UTRA-NR inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is used

A.10.4.4.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.1.2.4.21 of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.1.2.4.22 of TS 36.133 [15] for E-UTRAN TDD-NR measurements.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 with CCA on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 with CCA on NR RF channel 2. The test parameters are given in Tables A.10.4.4.2.1-1, A.10.4.4.2.1-2, A.10.4.4.2.1-3 and A.10.4.4.2.1-4. Cell transmits SSBs in DBT windows according to DL CCA model.

In tests 1 and 2, measurement gap pattern configuration # 0 as defined in Table A.10.4.4.2.1-2 is provided for UE that does not support per-FR gap and in tests 3 and 4, measurement gap pattern configuration #4 as defined in Table A.10.4.4.2.1-2 is provided for UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) [16] is used. The UE is tested when MeasTriggerQuantity is configured as RSRP, RSRQ and SINR for each test. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

Table A.10.4.4.2.1-1: NR inter-RAT event triggered reporting tests without SSB index reading for FR1

Configuration	Description
1	LTE FDD; NR with CCA: SCS 30 kHz, BW 40 MHz, TDD
2	LTE TDD; NR with CCA: SCS 30 kHz, BW 40 MHz, TDD
NOTE: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.10.4.4.2.1-2: General test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

Parameter		Unit	Test configuration	Value				Comment
				Test 1	Test 2	Test 3	Test 4	
E-UTRA RF Channel Number			1, 2	1				One E-UTRAcarrier frequency is used.
NR RF Chanel Number			1, 2	1,2				Two FR1 NR carrier frequency under CCA is used.
Active cell			1, 2	E-UTRA cell 1 (PCell) and NR cell 2 with CCA (PSCell)				E-UTRA cell 1 is on E-UTRA RF channel number 1.
DL CCA model	Dynamic channel access Note 3, 5			As specified in clause A.3.26.2.1				
	Semi-static channel access Note 4, 5							

UL CCA model	Dynamic channel access Note 3, 5			As specified in clause A.3.26.2.2			
	Semi-static channel access Note 4, 5						
Neighbour cell			1, 2	NR cell 3			NR cell 3 is on NR RF channel number 2.
Gap Pattern Id			1, 2	0		4	As specified in clause Table 8.1.2.1-1 of TS 36.133 [15].
Measurement gap offset			1, 2	39		19	As specified in TS 36.331 [16].
b2-Threshold1		dBm	1, 2	Note 1			E-UTRA RSRP/RSRQ/SINR threshold for E-UTRA RSRP measurement on cell 1 for event B2 [16]
b2-Threshold2NR		dBm	1, 2	Note 2			SS-RSRP/ SS-RSRQ/ SS-SINR threshold measurement on cell 3 for event B2 [16]
Hysteresis		dB	1, 2	0			
CP length			1, 2	Normal			
TimeToTrigger		s	1, 2	0			
Filter coefficient			1, 2	0			L3 filtering is not used
DRX			1, 2	DRX.9	DRX.12	DRX.9	DRX.12	As specified in clause A.3.3
Time offset between serving and neighbour cells			1, 2	3µs			Synchronous cells.
T1		s	1, 2	5			
T2		s	1, 2	≥$T_{identify_irat_cca_without_index}$			$T_{identify_irat_cca_without_index}$ is defined in clause 8.1.2.4.21A.1 and 8.1.2.4.22A.1 in TS 36.133

NOTE 1: The value of b2-Threshold1 is defined in Table A.10.4.4.1.1-3
NOTE 2: The value of b2-Threshold2NR is defined in Table A.10.4.4.1.1-4
NOTE 3: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy.
NOTE 4: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy.
NOTE 5: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

Table A.10.4.4.2.1-3: E-UTRAN PCell specific test parameters for NR inter-RAT event triggered reporting in non-DRX with NR neigbour cell in FR1 without SSB time index detection

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2	1	
Duplex mode		1	FDD	
		2	TDD	
TDD special subframe configuration Note1		2	6	
TDD uplink-downlink configuration Note1		2	1	
$BW_{channel}$	MHz	1, 2	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel Note2		1	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		2	5 MHz: R.4 TDD	

			10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		1	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		2	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]		1	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		2	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
b2-Threshold1	dBm	1, 2	-77 for RSRP	
	dB	1, 2	77 for RSRQ	
	dB	1, 2	90 for SINR	
PBCH_RA PBCH_RB PSS_RA SSS_RA PCFICH_RB PHICH_RA PHICH_RB PDCCH_RA PDCCH_RB PDSCH_RA PDSCH_RB OCNG_RA[Note3] OCNG_RB[Note3]	dB	1, 2	0	
N_{oc}[Note4]	dBm/15kHz	1, 2	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2	17	17
$\hat{E}_s/I_{ot}$[Note5]	dB	1, 2	17	17
RSRP[Note5]	dBm/15kHz	1, 2	-87	-87
SCH_RP[Note5]	dBm/15kHz	1, 2	-87	-87
Io[Note5]	dBm/9MHz	1, 2	-59.13+10log ($N_{RB,c}$ /50)	-59.13+10log ($N_{RB,c}$ /50)
Propagation Condition [Note6]		1, 2	ETU70	
Antenna Configuration and Correlation Matrix [Note6]		1, 2	1x2 Low	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].

Table A.10.4.4.2.1-4: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T2	T2
NR RF Channel Number		1, 2	2		3	
TDD configuration		1, 2	TDDConf.1.1 CCA		TDDConf.1.1 CCA	

$BW_{channel}$	MHz	1, 2	40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
P_{CCA_DL} for dynamic channel access Note 6,8		1, 2	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	
P_{CCA_DL} for semi-static channel access Note 7,8		1, 2	P_{CCA_DL}=0.9375		P_{CCA_DL}=0.9375	
P_{CCA_UL} for dynamic channel access Note 6,8		1, 2	1		1	
P_{CCA_UL} for semi-static channel access Note 7,8		1, 2	1		1	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		1, 2	OP.1		OP.1	
SMTC configuration defined in A.3.11.1 and A.3.11.2		1, 2	SMTC.1		SMTC.1	
DBT window configuration		1, 2	DBT.1		DBT.1	
SSB configuration for semi-static channel access		1, 2	SSB.1 CCA		SSB.1 CCA	
SSB configuration for dynamic channel access		1, 2	SSB.2 CCA		SSB.2 CCA	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	30		30	
b2-Threshold2NR	dBm	1, 2	NA		-98 for SS-RSRP	
	dB	1, 2	NA		55 for SS-RSRQ	
		1, 2	NA		50 for SS-SINR	
EPRE ratio of PSS to SSS		1, 2	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS (Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15kHz	1, 2	-98		-98	
N_{oc} Note2	dBm/SCS	1, 2	-95		-95	
SS-RSRP Note 3,5	dBm/SCS	1, 2	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$ Note 5	dB	1, 2	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$ Note 5	dB	1, 2	4	4	-Infinity	7
Io Note3	dBm/38.16MHz	1, 2	-58.49	-58.49	-63.95	-56.16
Propagation Condition		1, 2	ETU70		ETU70	
Antenna Configuration and Correlation Matrix		1, 2,	1x2 Low		1x2 Low	

NOTE 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
NOTE 5: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.
NOTE 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
NOTE 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
NOTE 8: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

A.10.4.4.2.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than $T_{identify_irat_cca_without_index}$ ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than $T_{identify_irat_cca_without_index}$ ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 3 with per-FR gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than $T_{identify_irat_cca_without_index}$ ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 4 with per-FR gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than $T_{identify_irat_cca_without_index}$ ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In tests 1, 2, 3 and 4, the UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.10.4.4.3 NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is not used

A.10.4.4.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.1.2.4.21of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.1.2.4.22 of TS 36.133 [15] for E-UTRAN TDD-NR measurements.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 with CCA on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 with CCA on NR RF channel 2. The test parameters are given in Tables A.10.4.4.3.1-1, A.10.4.4.3.1-2, A.10.4.4.3.1-3 and A.10.4.4.3.1-4. Cell transmits SSBs in DBT windows according to DL CCA model.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.10.4.4.3.1-2 is provided for UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #4 as defined in Table A.10.4.4.3.1-2 is provided for UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) [16] is used. The UE is tested when MeasTriggerQuantity is configured as RSRP, RSRQ and SINR for each test. In the measurement configuration the UE shall be indicated to report the SSB index of the identified NR cell. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

Table A.10.4.4.3.1-1: NR inter-RAT event triggered reporting tests with SSB index reading for FR1

Configuration	Description
1	LTE FDD; NR with CCA: SCS 30 kHz, BW 40 MHz, TDD
2	LTE TDD; NR with CCA: SCS 30 kHz, BW 40 MHz, TDD
NOTE: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.10.4.4.3.1-2: General test parameters for NR inter-RAT event triggered reporting for FR1 with SSB time index detection

Parameter		Unit	Test configuration	Value		Comment
				Test 1	Test 2	
E-UTRA RF Channel Number			1, 2	1		One E-UTRAcarrier frequency is used.
NR RF Chanel Number			1, 2	1,2		Two FR1 NR carrier frequency under CCA is used.
DL CCA model	Dynamic channel access Note 3, 5			As specified in clause A.3.26.2.1		
	Semi-static channel access Note 4, 5					
UL CCA model	Dynamic channel access Note 3, 5			As specified in clause A.3.26.2.2		
	Semi-static channel access Note 4, 5					
Active cell			1, 2	E-UTRA cell 1 (PCell) and NR cell 2 with CCA (PSCell)		E-UTRA cell 1 is on E-UTRA RF channel number 1.
Neighbour cell			1, 2	NR cell 3		NR cell 3 is on NR RF channel number 2.
Gap Pattern Id			1, 2	0	4	As specified in clause Table 8.1.2.1-1 of TS 36.133 [15].
Measurement gap offset			1, 2	39	19	As specified in TS 36.331 [16].

b2-Threshold1	dBm	1, 2	Note 1		E-UTRA RSRP/RSRQ/SINR threshold for E-UTRA RSRP measurement on cell 1 for event B2 [16]
b2-Threshold2NR	dBm	1, 2	Note 2		SS-RSRP/ SS-RSRQ/ SS-SINR threshold measurement on cell 3 for event B2 [16]
Hysteresis	dB	1, 2	0		
CP length		1, 2	Normal		
TimeToTrigger	s	1, 2	0		
Filter coefficient		1, 2	0		L3 filtering is not used
DRX		1, 2	OFF		DRX is not used
Time offset between serving and neighbour cells		1, 2	3µs		Synchronous cells.
T1	s	1, 2	5		
T2	s	1, 2	≥ $T_{identify_irat_cca_with_index}$	≥ $T_{identify_irat_cca_with_index}$	$T_{identify_irat_cca_with_index}$ is defined in clause 8.1.2.4.21A.1 and 8.1.2.4.22A.1 in TS 36.133
NOTE 1: The value of b2-Threshold1 is defined in Table A.10.4.4.3.1-3 NOTE 2: The value of b2-Threshold2NR is defined in Table A.10.4.4.3.1-4 NOTE 3: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy. NOTE 4: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy. NOTE 5: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.					

Table A.10.4.4.3.1-3: E-UTRAN PCell specific test parameters for NR inter-RAT event triggered reporting in non-DRX with NR neigbour cell in FR1 with SSB time index detection

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2	1	
Duplex mode		1	FDD	
		2	TDD	
TDD special subframe configuration[Note1]		2	6	
TDD uplink-downlink configuration[Note1]		2	1	
$BW_{channel}$	MHz	1, 2	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note2]		1	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		2	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		1	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		2	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]		1	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		2	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
b2-Threshold1	dBm	1, 2	-77 for RSRP	

	dB	1, 2	77 for RSRQ	
	dB	1, 2	90 for SINR	
PBCH_RA	dB	1, 2	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA Note3				
OCNG_RB Note3				
N_{oc} Note4	dBm/15kHz	1, 2	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2	17	17
$\hat{E}_s/I_{ot}$ Note5	dB	1, 2	17	17
RSRP Note5	dBm/15kHz	1, 2	-87	-87
SCH_RP Note5	dBm/15kHz	1, 2	-87	-87
Io Note5	dBm/9MHz	1, 2	-59.13+10log ($N_{RB,c}$ /50)	-59.13+10log ($N_{RB,c}$ /50)
Propagation Condition Note6		1, 2	ETU70	
Antenna Configuration and Correlation Matrix Note6		1, 2	1x2 Low	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].

Table A.10.4.4.3.1-4: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR1 with SSB time index detection

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T2	T2
NR RF Channel Number		1, 2	2		3	
TDD configuration		1, 2	TDDConf.1.1 CCA		TDDConf.1.1 CCA	
$BW_{channel}$	MHz	1, 2	40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
P_{CCA_DL} for dynamic channel access Note 6,8		1, 2	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	
P_{CCA_DL} for semi-static channel access Note 7,8		1, 2	P_{CCA_DL}=0.9375		P_{CCA_DL}=0.9375	
P_{CCA_UL} for dynamic channel access Note 6,8		1, 2	1		1	
P_{CCA_UL} for semi-static channel access Note 7,8		1, 2	1		1	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		1, 2	OP.1		OP.1	
SMTC configuration defined in A.3.11.1 and A.3.11.2		1, 2	SMTC.1		SMTC.1	
DBT window configuration		1, 2	DBT.1		DBT.1	
SSB configuration for semi-static channel access		1, 2	SSB.1 CCA		SSB.1 CCA	

SSB configuration for dynamic channel access		1, 2	SSB.2 CCA		SSB.2 CCA	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	30		30	
b2-Threshold2NR	dBm	1, 2	NA		-98 for SS-RSRP	
	dB	1, 2	NA		55 for SS-RSRQ	
		1, 2	NA		50 for SS-SINR	
EPRE ratio of PSS to SSS		1, 2	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS (Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15kHz	1, 2	-98		-98	
N_{oc} Note2	dBm/SCS	1, 2	-95		-95	
SS-RSRP Note 3,5	dBm/SCS	1, 2	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$ Note 5	dB	1, 2	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$ Note 5	dB	1, 2	4	4	-Infinity	7
Io Note3	dBm/38.16MHz	1, 2	-58.49	-58.49	-63.95	-56.16
Propagation Condition		1, 2	ETU70		ETU70	
Antenna Configuration and Correlation Matrix		1, 2,	1x2 Low		1x2 Low	

NOTE 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
NOTE 5: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.
NOTE 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
NOTE 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
NOTE 8: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

A.10.4.4.3.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than $T_{identify_irat_cca_with_index}$ ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-FR gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than $T_{identify_irat_cca_with_index}$ ms from the beginning of time period T2. The UE shall not send event

triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and test 2, the UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.10.4.4.4 NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is used

A.10.4.4.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.1.2.4.21of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.1.2.4.22 of TS 36.133 [15] for E-UTRAN TDD-NR measurements.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 with CCA on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 with CCA on NR RF channel 2. The test parameters are given in Tables A.10.4.4.4.1-1, A.10.4.4.4.1-2, A.10.4.4.4.1-3 and A.10.4.4.4.1-4. Cell transmits SSBs in DBT windows according to DL CCA model.

In tests 1 and 2, measurement gap pattern configuration # 0 as defined in Table A.10.4.4.4.1-2 is provided for UE that does not support per-FR gap and in tests 3 and 4, measurement gap pattern configuration #4 as defined in Table A.10.4.4.4.1-2 is provided for UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) [16] is used. In the measurement configuration the UE shall be indicated to report the SSB index of the identified NR cell. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

Table A.10.4.4.4.1-1: NR inter-RAT event triggered reporting tests with SSB index reading for FR1

Configuration	Description
1	LTE FDD; NR with CCA: SCS 30 kHz, BW 40 MHz, TDD
2	LTE TDD; NR with CCA: SCS 30 kHz, BW 40 MHz, TDD
NOTE: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.10.4.4.4.1-2: General test parameters for NR inter-RAT event triggered reporting for FR1 with SSB time index detection

Parameter		Unit	Test configuration	Value				Comment
				Test 1	Test 2	Test 3	Test	
E-UTRA RF Channel Number			1, 2	1				One E-UTRAcarrier frequency is used.
NR RF Chanel Number			1, 2	1,2				Two FR1 NR carrier frequency under CCA is used.
DL CCA model	Dynamic channel access[Note 3, 5]			As specified in clause A.3.26.2.1				

	Semi-static channel access Note 4, 5						
UL CCA model	Dynamic channel access Note 3, 5			As specified in clause A.3.26.2.2			
	Semi-static channel access Note 4, 5						
Active cell			1, 2	E-UTRA cell 1 (PCell) and NR cell 2 with CCA (PSCell)			E-UTRA cell 1 is on E-UTRA RF channel number 1.
Neighbour cell			1, 2	NR cell 3			NR cell 3 is on NR RF channel number 2.
Gap Pattern Id			1, 2	0	4		As specified in clause Table 8.1.2.1-1 of TS 36.133 [15].
Measurement gap offset			1, 2	39	19		As specified in TS 36.331 [16].
b2-Threshold1		dBm	1, 2	Note 1			E-UTRA RSRP/RSRQ/SINR threshold for E-UTRA RSRP measurement on cell 1 for event B2 [16]
b2-Threshold2NR		dBm	1, 2	Note 2			SS-RSRP/ SS-RSRQ/ SS-SINR threshold measurement on cell 3 for event B2 [16]
Hysteresis		dB	1, 2	0			
CP length			1, 2	Normal			
TimeToTrigger		s	1, 2	0			
Filter coefficient			1, 2	0			L3 filtering is not used
DRX			1, 2	DRX.9	DRX.12	DRX.9	DRX.12	As specified in clause A.3.3
Time offset between serving and neighbour cells			1, 2	3μs			Synchronous cells.
T1		s	1, 2	5			
T2		s	1, 2	$\geq T_{identify_irat_cca_with_index}$			$T_{identify_irat_cca_with_index}$ is defined in clause 8.1.2.4.21A.1 and 8.1.2.4.22A.1 in TS 36.133

NOTE 1: The value of b2-Threshold1 is defined in Table A.10.4.4.4.1-3
NOTE 2: The value of b2-Threshold2NR is defined in Table A.10.4.4.4.1-4
NOTE 3: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy.
NOTE 4: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy.
NOTE 5: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

Table A.10.4.4.4.1-3: E-UTRAN PCell specific test parameters for NR inter-RAT event triggered reporting in non-DRX with NR neigbour cell in FR1 with SSB time index detection

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2	1	
Duplex mode		1	FDD	
		2	TDD	
TDD special subframe configuration Note1		2	6	

TDD uplink-downlink configuration[Note1]		2	1	
$BW_{channel}$	MHz	1, 2	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note2]		1	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		2	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		1	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		2	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]		1	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		2	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
b2-Threshold1	dBm	1, 2	-77 for RSRP	
	dB	1, 2	77 for RSRQ	
	dB	1, 2	90 for SINR	
PBCH_RA	dB	1, 2	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note3]				
OCNG_RB[Note3]				
N_{oc}[Note4]	dBm/15kHz	1, 2	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2	17	17
$\hat{E}_s/I_{ot}$[Note5]	dB	1, 2	17	17
RSRP[Note5]	dBm/15kHz	1, 2	-87	-87
SCH_RP[Note5]	dBm/15kHz	1, 2	-87	-87
Io[Note5]	dBm/9MHz	1, 2	-59.13+10log ($N_{RB,c}$ /50)	-59.13+10log ($N_{RB,c}$ /50)
Propagation Condition [Note6]		1, 2	ETU70	
Antenna Configuration and Correlation Matrix [Note6]		1, 2	1x2 Low	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].

Table A.10.4.4.4.1-4: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR1 with SSB time index detection

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T2	T2
NR RF Channel Number		1, 2	2		3	
TDD configuration		1, 2	TDDConf.1.1 CCA		TDDConf.1.1 CCA	
$BW_{channel}$	MHz	1, 2	40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
P_{CCA_DL} for dynamic channel access Note 6,8		1, 2	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	
P_{CCA_DL} for semi-static channel access Note 7,8		1, 2	P_{CCA_DL}=0.9375		P_{CCA_DL}=0.9375	
P_{CCA_UL} for dynamic channel access Note 6,8		1, 2	1		1	
P_{CCA_UL} for semi-static channel access Note 7,8		1, 2	1		1	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		1, 2	OP.1		OP.1	
SMTC configuration defined in A.3.11.1 and A.3.11.2		1, 2	SMTC.1		SMTC.1	
DBT window configuration		1, 2	DBT.1		DBT.1	
SSB configuration for semi-static channel access		1, 2	SSB.1 CCA		SSB.1 CCA	
SSB configuration for dynamic channel access		1, 2	SSB.2 CCA		SSB.2 CCA	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	30		30	
b2-Threshold2NR	dBm	1, 2	NA		-98 for SS-RSRP	
	dB	1, 2	NA		55 for SS-RSRQ	
		1, 2	NA		50 for SS-SINR	
EPRE ratio of PSS to SSS		1, 2	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS (Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15kHz	1, 2	-98		-98	
N_{oc} Note2	dBm/SCS	1, 2	-95		-95	
SS-RSRP Note 3,5	dBm/SCS	1, 2	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$ Note 5	dB	1, 2	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$ Note 5	dB	1, 2	4	4	-Infinity	7
Io Note3	dBm/38.16MHz	1, 2	-58.49	-58.49	-63.95	-56.16
Propagation Condition		1, 2	ETU70		ETU70	
Antenna Configuration and Correlation Matrix		1, 2,	1x2 Low		1x2 Low	

NOTE 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
NOTE 5: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.

A.10.4.4.4.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than $T_{identify_irat_cca_with_index}$ ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than $T_{identify_irat_cca_with_index}$ ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 3 with per-FR gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than $T_{identify_irat_cca_with_index}$ ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 4 with per-FR gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than $T_{identify_irat_cca_with_index}$ ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In tests 1, 2, 3 and 4, the UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.10.5 Measurement performance

A.10.5.1 SS-RSRP

A.10.5.1.1 Intra-frequency measurement accuracy on a CCA serving cell

A.10.5.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.36.1.1 and 10.1.36.1.2 when the serving cell is subject to CCA.

A.10.5.1.1.2 Test parameters

In this set of test cases there are two cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell under CCA (Cell 2). Cell 2 operates on a carrier frequency with CCA and transmits SSBs in DBT window according to DL CCA model. Supported test configurations are shown in Table A.10.5.1.1.1-1. Both absolute and relative accuracy of SS-RSRP intra-frequency measurements are tested by using the parameters in Table A.10.5.1.1.1-2. The configuration of cell 1 (E-UTRA PCell) is specified in clause A.3.7A.2.1. In all test cases, Cell 2 is the PSCell, and Cell 3 is the target cell.

Table A.10.5.1.1.2-1: SS-RSRP Intra frequency SS-RSRP supported test configurations

Config	Description
1	LTE FDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations for each supported band	

Table A.10.5.1.1.2-2: SS-RSRP Intra frequency test parameters

Parameter			Unit	Test 1		Test 2	
				Cell 2	Cell 3	Cell 2	Cell 3
Physical cell ID				489	0	489	0
SSB ARFCN				freq1			
Duplex mode		Config 1, 2		TDD			
TDD configuration		Config 1, 2		TDDConf.1.1 CCA			
$BW_{channel}$		Config 1, 2	MHz	40: $N_{RB,c}$ = 106			
Downlink initial BWP configuration				DLBWP.0.1			
Downlink dedicated BWP configuration				DLBWP.1.1			
Uplink initial BWP configuration				ULBWP.0.1			
Uplink dedicated BWP configuration				ULBWP.1.1			
TRS configuration		Config 1, 2		TRS.1.2 TDD	NA	TRS.1.2 TDD	NA
DRX Cycle			ms	Not Applicable			
PDSCH Reference measurement channel		Config 1, 2		SR.1.1 CCA		SR.1.1 CCA	
RMSI CORESET Reference Channel		Config 1, 2		CR.1.1 CCA		CR.1.1 CCA	
Control Channel RMC		Config 1, 2		CCR.1.1 CCA		CCR.1.1 CCA	
DL CCA model				As specified in clause A.3.26.2.1			
UL CCA model				As specified in clause A.3.26.2.2			
P_{CCA_DL} for dynamic channel access Note 7,8		Config 1, 2		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75
P_{CCA_DL} for semi-static channel access Note 6.8		Config 1, 2		P_{CCA_DL}=0.9375	P_{CCA_DL}=0.9375	P_{CCA_DL}=0.9375	P_{CCA_DL}=0.9375
P_{CCA_UL}		Config 1, 2		1	1	1	1
SSB configuration	Semi-static channel access	Config 1, 2		SSB.1 CCA (As defined in A.3.10A)	SSB.1 CCA (As defined in A.3.10A)	SSB.1 CCA (As defined in A.3.10A)	SSB.1 CCA (As defined in A.3.10A)
	Dynamic channel access			SSB.2 CCA (As defined in A.3.10A)	SSB.2 CCA (As defined in A.3.10A)	SSB.2 CCA (As defined in A.3.10A)	SSB.2 CCA (As defined in A.3.10A)
Time offset with Cell 2		Config 1, 2	µs	-	3	-	3
SMTC configuration		Config 1, 2		SMTC.1			
DBT Window Configuration		Config 1, 2		As defined in A.3.28.1			
DL CCA model		Config 1, 2		As specified in clause A.3.26.2.1			
UL CCA model		Config 1, 2		As specified in clause A.3.26.2.2			
OCNG Patterns				OP.1			
PDSCH/PDCCH subcarrier spacing		Config 1, 2	kHz	30kHz			
EPRE ratio of PSS to SSS			dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							

EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2	Config 1, 2	NR_CCA_FR1_I	dBm/15KhZ	-94		-110	
		NR_CCA_FR1_J				-109.5	
N_{oc} Note2	Config 1, 2	NR_CCA_FR1_I	dBm/SCS	-91		-107.0	
		NR_CCA_FR1_J				-106.5	
$\hat{E}_s/I_{ot}$			dB	2.46	-5.97	-2.01	-3.54
$\hat{E}_s/N_{oc}$			dB	6	1	1	0
SS-RSRP Note3	Config 1, 2	NR_CCA_FR1_I	dBm/SCS	-85	-90	-106.00	-107.00
		NR_CCA_FR1_J				-105.50	-106.50
Io Note3	Config 1, 2	NR_CCA_FR1_I	dBm/38.16MHz	-51.99		-70.82	
		NR_CCA_FR1_J				-70.32	
Propagation condition			-	AWGN			
Antenna configuration				1x2			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

Note 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.

Note 8: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

A.10.5.1.1.3 Test Requirements

The SS-RSRP measurement accuracy for cell 2 and cell 3 shall fulfil absolute requirement in clause 10.1.2.1.1 and relative requirement in clause 10.1.36.1.1 and 10.1.36.1.2.

A.10.5.1.2 Inter-frequency measurement accuracy with FR1 CCA serving cell and FR1 CCA target cell

A.10.5.1.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1.37.1.1 and 10.1.37.1.2 for inter-frequency measurements with the testing configurations in Table A.10.5.1.2.1-1.

Table A.10.5.1.2.1-1: Applicable NR configurations for FR1 inter-frequency SS-RSRP accuracy test

Config	Description
1	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations on each supported band	

A.10.5.1.2.2 Test parameters

In this set of test cases there are three cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and a FR1 neighbour cell (Cell 3) on a different frequency than the PSCell. The test parameters and applicability for Cell 1 are defined in A.3.7A.2.1. The test parameters for the Cell 2 and Cell 3 are given in Table A.10.5.1.2.2-1 below. Both absolute and relative accuracy of RSRP inter-frequency measurements are tested by using the parameters in Table A.10.5.1.2.2-1. The inter-frequency measurements are supported by a measurement gap.

Table A.10.5.1.2.2-1: SS-RSRP inter-frequency test parameters

Parameter		Config	Unit	Test 1		Test 2	
				Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN		1, 2		freq1	freq2	freq1	freq2
$BW_{channel}$		1, 2	MHz	40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
Gap pattern ID				0		0	
Duplex mode		1, 2		TDD		TDD	
TDD configuration		1, 2		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
PDSCH Reference measurement channel		1, 2		SR.1.1 CCA		SR.1.1 CCA	
RMSI CORESET Reference Channel		1, 2		CR.1.1 CCA	-	CR.1.1 CCA	-
Dedicated CORESET Reference Channel		1, 2		CCR.1.1 CCA	-	CCR.1.1 CCA	-
SSB configuration	Semi-static channel access	1, 2		SSB.1 CCA (As defined in A.3.10A)		SSB.1 CCA (As defined in A.3.10A)	
	Dynamic channel access			SSB.2 CCA (As defined in A.3.10A)		SSB.2 CCA (As defined in A.3.10A)	
OCNG Patterns		1, 2		OP.1		OP.1	
TRS configuration		1, 2		TRS.1.2 TDD		TRS.1.2 TDD	
Initial BWP Configuration		1, 2		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration		1, 2		DLBWP.1.1 ULBWP.1.1		DLBWP.1.1 ULBWP.1.1	

Time offset with Cell 2		1, 2	µs	-	3	-	3
SMTC configuration		1, 2		TBD		TBD	
DBT Window Configuration		1, 2		As defined in A.3.28.1		As defined in A.3.28.1	
DL CCA model				As specified in clause A.3.20.2.1			
UL CCA model				As specified in clause A.3.20.2.2			
EPRE ratio of PSS to SSS EPRE ratio of PBCH DMRS to SSS EPRE ratio of PBCH to PBCH DMRS EPRE ratio of PDCCH DMRS to SSS EPRE ratio of PDCCH to PDCCH DMRS EPRE ratio of PDSCH DMRS to SSS EPRE ratio of PDSCH to PDSCH DMRS EPRE ratio of OCNG DMRS to SSS Note 1 EPRE ratio of OCNG to OCNG DMRS Note 1		1, 2	dB	0	0	0	0
N_{oc} Note2	NR_CCA_FR1_I	1, 2	dBm/15kHz	-94.65		(N_{oc} for Cell 3 +8dB)	-111
	NR_CCA_FR1_J						-110.5
N_{oc} Note2	NR_CCA_FR1_I	1, 2	dBm/SSB SCS	-91.65		(N_{oc} for C 3 +8dB)	-109.00
	NR_CCA_FR1_J						-108.50
$\hat{E}_s / I_{ot}$		1, 2	dB	10	10	13	-3
SS-RSRP Note3	NR_CCA_FR1_I	1, 2	dBm/SCS	-81.65		(RSRP for Cell 3 +25dB)	-111.00
	NR_CCA_FR1_J						-110.50
Io Note3	R_CCA_FR1_I	1, 2	dBm/ 38.16MHz	-50.19		(Io for Channel 3 +19.75dB)	-75.19
	NR_CCA_FR1_J						-74.69
$\hat{E}_s / N_{oc}$		1, 2	dB	10	10	13	-3
Propagation condition		1, 2	-	AWGN		AWGN	
Antenna configuration				1x2		1x2	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4:	RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

A.10.5.1.2.3 Test Requirements

The SS-RSRP measurement accuracy for Cell 2 and Cell 3 shall fulfil the Absolute requirement in clause 10.1.4.1.1 and Relative requirement in clause 10.1.37.1.1 and 10.1.37.1.2.

A.10.5.2 SS-RSRQ

A.10.5.2.1 Intra-frequency measurement accuracy with FR1 CCA serving cell and FR1 CCA target cell

A.10.5.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.29.1.1.

A.10.5.2.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table A.10.5.2.1.2-1. The absolute accuracy of SS-RSRQ intra-frequency measurement is test by using the parameters in Table A.10.5.2.1.2-2. The configuration of cell 1 (E-UTRA PCell) is specified in clause A.3.7A.2.1. In all test cases, Cell 2 is the PSCell and Cell 3 is the target cell.

Table A.10.5.2.1.2-1: SS-RSRQ Intra frequency SS-RSRQ supported test configurations

Config	Description
1	LTE FDD, NR 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table A.10.5.2.1.2-2: SS-RSRQ Intra frequency test parameters

Parameter		Unit	Test 1		Test 3	
			Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN			freq1			
Duplex mode	Config 1, 2		TDD			
TDD configuration	Config 1, 2		TDDConf.1.1 CCA			
$BW_{channel}$	Config 1, 2	MHz	40: $N_{RB,c}$ = 106			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
DRX Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1, 2		SR.1.1 CCA		SR.1.1 CCA	
RMSI CORESET Reference Channel	Config 1, 2		CR.1.1 CCA		CR.1.1 CCA	
Control Channel RMC	Config 1, 2		CCR.1.1 CCA		CCR.1.1 CCA	
TRS configuration	Config 1, 2		TRS.1.2 TDD		TRS.1.2 TDD	
OCNG Patterns			OP. 1			

SS-RSSI-Measurement				Not Applicable			
Time offset with Cell 2	Config 1, 2		µs	-	3	-	3
SMTC configuration	Config 1, 2			TBD			
SSB configuration	Semi-static channel access	Config 1, 2		SSB.1 CCA (As defined in A.3.10A)			
	Dynamic channel access			SSB.2 CCA (As defined in A.3.10A)			
PDSCH/PDCCH subcarrier spacing	Config 1, 2		kHz	30kHz			
DBT Window Configuration	Config 1, 2			As defined in A.3.28.1			
DL CCA model	Config 1, 2			As specified in clause A.3.20.2.1			
UL CCA model	Config 1, 2			As specified in clause A.3.20.2.2			
EPRE ratio of PSS to SSS			dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2	Config1, 2	NR_CCA_FR1_I	Bm/15kHz	-91		-110	
		NR_CCA_FR1_J				-109.5	
N_{oc} Note2	Config 1, 2	NR_CCA_FR1_I	dBm/SC S	-88		-107	
		NR_CCA_FR1_J				-106.5	
$\hat{E}_s / I_{ot}$			dB	-1.76		-5.46	-5.46
$\hat{E}_s / N_{oc}$			dB	3	3	-4	-4
SS-RSRP Note3	Config 1, 2	NR_CCA_FR1_I	dBm/SCS	-85	-85	-111	-111
		NR_CCA_FR1_J				-110.5	-110.5
SS-RSRQ Note3		NR_CCA_FR1_I	dB	-14.77	-14.77	-17.34	-17.34
		NR_CCA_FR1_J					
Io Note3	Config 1, 2	NR_CCA_FR1_I	dBm/ 38.16MHz	-50			-73.4
		NR_CCA_FR1_J					-72.9
Propagation condition			-	AWGN	AWGN	AWGN	AWGN
Antenna configuration				1x2	1x2	1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRQ, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: NR operating band groups are as defined in Clause 3.5.2.

Note 6: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

A.10.5.2.1.3 Test Requirements

The SS-RSRQ measurement accuracy shall fulfil the requirements in clause 10.1.29.1.1.

A.10.5.2.2 Inter-frequency measurement accuracy with FR1 CCA serving cell and FR1 CCA target cell

A.10.5.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limitsThis test will verify the requirements in clause 10.1.30.1.1 and 10.1.30.1.2 for inter-frequency measurements with the testing configurations in Table A.10.5.2.2.2-1.

A.10.5.2.2.2 Test Parameters

In this set of test cases there are three cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and a FR1 neighbour cell (Cell 3) on a different frequency than the PSCell. The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 and Cell 3 are given in Table A.4.7.1.2.2-1 below. Both absolute and relative accuracy of RSRP inter-frequency measurements are tested by using the parameters in Table A.10.5.2.2.2-2. The inter-frequency measurements are supported by a measurement gap.

Table A.10.5.2.2.2-1: SS-RSRQ Inter frequency SS-RSRQ supported test configurations

Config	Description
1	LTE FDD, NR 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table A.10.5.2.2.2-2: SS-RSRQ Inter frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 2	Cell 3	Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN			freq1	freq2	freq1	freq2	freq1	freq2
Duplex mode	Config 1, 2		TDD					
TDD configuration	Config 1, 2		TDDConf.1.1 CCA					
$BW_{channel}$	Config 1, 2		40: $N_{RB,c}$ = 106					
BWP BW	Config 1, 2	MHz	40: $N_{RB,c}$ = 106					
Gap pattern ID			0					
DRX Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1, 2		SR.1.1 CCA		SR.1.1 CCA		SR.1.1 CCA	
RMSI CORESET Reference Channel	Config 1, 2		CR.1.1 CCA		CR.1.1 CCA		CR.1.1 CCA	
Dedicated CORESET Reference Channel	Config 1, 2		CCR.1.1 CCA		CCR.1.1 CCA		CCR.1.1 CCA	
TRS configuration	Config 1, 2		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD	
OCNG Patterns			OCNG pattern 1					
Time offset with Cell 2	Config 1, 2	µs	-	3	-	3	-	3
SMTC configuration	Config 1, 2		TBD					

SSB configuration	Semi-static channel access	Config 1, 2		SSB.1 CCA (As defined in A.3.10A)					
	Dynamic channel access			SSB.2 CCA (As defined in A.3.10A)					
DBT Window Configuration		Config 1, 2		As defined in A.3.28.1					
PDSCH/PDCCH subcarrier spacing		Config 1, 2	kHz	30 kHz					
EPRE ratio of PSS to SSS			dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2	Config 1, 2	NR_CCA_FR1_I	dBm/15kHz	-86.27	-86.27	-113	-113	-112	-112
		NR_CCA_FR1_J						-111.5	-111.5
N_{oc} Note2	Config 1, 2	NR_CCA_FR1_I	dBm/SCS	-83.27	-83.27	-110	-110	-109	-109
		NR_CCA_FR1_J						-108.5	-108.5
$\hat{E}_s / I_{ot}$			dB	-1.75	-1.75	-1.75	-1.75	3	-1.75
$\hat{E}_s / N_{oc}$			dB	-1.75	-1.75	-1.75	-1.75	3	-1.75
SS-RSRP Note3	Config 1, 2	NR_CCA_FR1_I	dBm/SCS	-85.02	-85.02	-111.75	-111.75	-106	-110.75
		NR_CCA_FR1_J						-105.5	-110.25
SS-RSRQ Note3		NR_CCA_FR1_I	dB	-14.77	-14.77	-40.59	-40.59	-12.56	-14.76
		NR_CCA_FR1_J							
Io Note3	Config 1, 2	NR_CCA_FR1_I	dBm/38.16MHz	-50	-50	-76.73	-76.73	-73.19	-75.23
		NR_CCA_FR1_J						-72.69	-74.73
Propagation condition				AWGN	AWGN	AWGN	AWGN	AWGN	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRQ, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: NR operating band groups are as defined in Section 3.5.2.

Note 6: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

A.10.5.2.2.3 Test Requirements

The SS-RSRQ measurement accuracy shall fulfil the requirements in clause 10.1.30.1.1 and 10.1.30.1.2.

A.10.5.3 SS-SINR

A.10.5.3.1 Intra-frequency measurement accuracy on PSCC

A.10.5.3.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.31.1.

A.10.5.3.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table A.10.5.3.1.2-1. The absolute accuracy of SS-SINR intra-frequency measurement is tested by using the parameters in Table A.10.5.3.1.2-2. The configuration of cell 1 (E-UTRA PCell) is specified in clause A.3.7A.2.1. In all test cases, Cell 2 is the PSCell with CCA and Cell 3 is the target cell with CCA. Two sub-tests (Test 1 and Test 2) are provided different N_{oc} on Cells 2 and 3.

Table A.10.5.3.1.2-1: SS-SINR Intra frequency SS-SINR supported test configurations

Config	Description
1	LTE FDD NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	LTE TDD NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.10.5.3.1.2-2: SS-SINR Intra frequency test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN			freq1		freq1	
DL CCA model	Config 1,2		As specified in clause A.3.26.2.1			
UL CCA model	Config 1,2		As specified in clause A.3.26.2.2			
UL CCA probability	P_{CCA_UL}		1.0	-	1.0	-
DL CCA probability for semi-static channel access Note 7, 8	P_{CCA_DL}		0.9375	-	0.9375	-
DL CCA probability for dynamic channel access Note 8, 9	$P_{CCA_DL_1}$		0.75	-	0.75	-
	$P_{CCA_DL_2}$		0.75	-	0.75	-
Duplex mode	Config 1,2		TDD			
TDD configuration	Config 1,2		TDDConf.1.1 CCA			
Downlink initial BWP configuration			DLBWP.0.1			
Downlink dedicated BWP configuration			DLBWP.1.1			
Uplink initial BWP configuration			ULBWP.0.1			
Uplink dedicated BWP configuration			ULBWP.1.1			
DRX Cycle configuration		ms	Not Applicable			
TRS Configuration	Config 1,2		TRS.1.2 TDD		TRS.1.2 TDD	
PDSCH Reference measurement channel	Config 1,2		SR.1.1 CCA		SR1.1 CCA	
RMSI CORESET Reference Channel	Config 1,2		CR.1.1 CCA		CR.1.1 CCA	
Dedicated CORESET Reference Channel	Config 1,2		CCR.1.1 CCA		CCR.1.1 CCA	
OCNG Patterns			OP.1			
SS-RSSI-Measurement			Not Applicable			
Time offset with Cell 2	Config 1,2	µs	-	3	-	3

DBT Window Configuration		Config 1,2		DBT.1			
SSB configuration		Config 1,2		SSB.1 CCA for semi-static channel access SSB.2 CCA for dynamic channel access			
SMTC configuration		Config 1,2		SMTC.1			
PDSCH/PDCCH subcarrier spacing		Config 1,2	kHz	30			
EPRE ratio of PSS to SSS			dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		NR_CCA_FR1_I	dBm/15kHz	-93		-112	
		NR_CCA_FR1_J				-111.5	
N_{oc} Note2	Config 1,2	NR_CCA_FR1_I	dBm/SCS	-90		-109	
		NR_CCA_FR1_J				-108.5	
$\hat{E}_s / I_{ot}$			dB	0	-3.19	-5.46	-5.46
$\hat{E}_s / N_{oc}$			dB	4.54	2.66	-4	-4
SS-RSRP Note3	Config 1,2	NR_CCA_FR1_I	dBm/SCS	-85.46	-87.34	-113	-113
		NR_CCA_FR1_J				-112.5	-112.5
SS-SINR Note3		NR_CCA_FR1_I	dB	0	-3.19	-5.46	-5.46
		NR_CCA_FR1_J					
Io Note3	Config 1,2	NR_CCA_FR1_I	dBm/38.16MHz	-51.41		-75.41	
		NR_CCA_FR1_J				-74.91	
Propagation condition			-	AWGN			
Antenna configuration			-	1x2			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: NR operating band groups are as defined in Clause 3.5.2.

Note 6: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configuration.

Note 7: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 8: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.

Note 9: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

A.10.5.3.1.3 Test Requirements

The SS-SINR measurement accuracy shall fulfil the requirements in clause 10.1.31.1.1.

A.10.5.3.2 Inter-frequency measurement accuracy on PSCC

A.10.5.3.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.32.1.1 and 10.1.32.1.2 for inter-frequency measurement.

A.10.5.3.2.2 Test Parameters

In this test case the two NR cells (i.e., Cell 2 and Cell 3) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.10.5.3.2.2-1. Both absolute accuracy and relative accuracy requirements of SS-SINR inter-frequency measurement are tested by using test parameters in Table A.10.5.3.2.2-2. In all test cases, Cell 2 is the PSCell with CCA and Cell 3 is target cell with CCA. Cell 1 is the E-UTRA cell of which specific test parameters for this test case are specified in Table A.3.7A.2.1-1. Three sub-tests (Test 1, Test 2 and Test 3) are provided different N_{oc} on Cells 2 and 3.

Table A.10.5.3.2.2-1: SS-SINR Inter frequency SS-SINR supported test configurations

Config	Description
1	LTE FDD NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	LTE TDD NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.10.5.3.2.2-2: SS-SINR Inter frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 2	Cell 3	Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN			freq1	freq2	freq1	freq2	freq1	freq2
DL CCA model	Config 1,2		As specified in clause A.3.26.2.1					
UL CCA model	Config 1,2		As specified in clause A.3.26.2.2					
UL CCA probability	P_{CCA_UL}		1.0	-	1.0	-	1.0	-
DL CCA probability for semi-static channel access Note 7, 8	P_{CCA_DL}		0.9375	-	0.9375	-	0.9375	-
DL CCA probability for dynamic channel access Note 8, 9	$P_{CCA_DL_1}$		0.75	-	0.75	-	0.75	-
	$P_{CCA_DL_2}$		0.75	-	0.75	-	0.75	-
Duplex mode	Config 1,2		TDD					
TDD configuration	Config 1,2		TDDConf.1.1 CCA					
Downlink initial BWP configuration			DLBWP.0.1					
Downlink dedicated BWP configuration			DLBWP.1.1					
Uplink initial BWP configuration			ULBWP.0.1					
Uplink dedicated BWP configuration			ULBWP.1.1					
DRX Cycle configuration		ms	Not Applicable					
Gap pattern ID			0	-	0	-	0	-
TRS configuration	Config 1,2		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD	
PDSCH Reference measurement channel	Config 1,2		SR.1.1 CCA		SR.1.1 CCA		SR.1.1 CCA	

RMSI CORESET Reference Channel	Config 1,2		CR.1.1 CCA		CR.1.1 CCA		CR.1.1 CCA		
Dedicated CORESET Reference Channel	Config 1,2		CCR.1.1 CCA		CCR.1.1 CCA		CCR.1.1 CCA		
OCNG Patterns			OP.1						
SS-RSSI-Measurement			Not Applicable						
Time offset with Cell 2	Config 1,2	µs	-	3	-	3	-	3	
DBT Window configuration	Config 1,2		DBT.1						
SSB configuration	Config 1,2		SSB.1 CCA for semi-static channel access SSB.2 CCA for dynamic channel access						
SMTC configuration	Config 1,2		SMTC.1						
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	30						
EPRE ratio of PSS to SSS		dB	0	0	0	0	0	0	
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2		NR_CCA_FR1_I	dBm/15kHz	-88		-108.5		-115.5	
		NR_CCA_FR1_J						-116	
N_{oc} Note2	Config 1,2	NR_CCA_FR1_I	dBm/SCS	-85		-105.5		-112.5	
		NR_CCA_FR1_J						-113	
$\hat{E}_s / I_{ot}$			dB	-1.75		20		-4.0	
$\hat{E}_s / N_{oc}$			dB	-1.75		20		-4.0	
SS-RSRP Note3	Config 1,2	NR_CCA_FR1_I		-86.75		-85.5		-116.5	
		NR_CCA_FR1_J						-116	
SS-SINR Note3		NR_CCA_FR1_I	dB	-1.75		20		-4.0	
		NR_CCA_FR1_J							
Io Note3	Config 1,2	NR_CCA_FR1_I	dBm/38.16MHz	-51.73		-54.41		-80	
		NR_CCA_FR1_J						-79.5	
Propagation condition			-	AWGN					
Antenna configuration			-	1x2					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: NR operating band groups are as defined in Clause 3.5.2.

Note 6: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configuration

Note 7: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 8: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.

Note 9: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

A.10.5.3.2.3 Test Requirements

The SS-SINR measurement accuracy shall fulfil the requirements in clause 10.1.32.1.1 and 10.1.32.1.2.

A.10.5.3.3 Intra-frequency measurement accuracy on SCC

A.10.5.3.3.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.31.1.

A.10.5.3.3.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table A.10.5.3.3.2-1. The absolute accuracy of SS-SINR intra-frequency measurement is tested by using the parameters in Table A.10.5.3.3.2-2. The configuration of cell 1 (E-UTRA PCell) is specified in clause A.3.7A.2.1. In all test cases, Cell 2 is the PSCell with CCA, Cell 3 is the SCell with CCA, and Cell 4 is the target cell with CCA. Two sub-tests (Test 1 and Test 2) are provided different N_{oc} on Cells 2, 3 and 4.

Table A.10.5.3.3.2-1: SS-SINR Intra frequency SS-SINR supported test configurations

Config	Description
1	LTE FDD NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	LTE TDD NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.10.5.3.3.2-2: SS-SINR Intra frequency test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 2 / Cell 3	Cell 4	Cell 2 / Cell 3	Cell 4
SSB ARFCN			freq1 for Cell 2 freq2 for Cell 3	freq2	freq1 for Cell 2 freq2 for Cell 3	freq2
DL CCA model	Config 1,2		As specified in clause A.3.26.2.1			
UL CCA model	Config 1,2		As specified in clause A.3.26.2.2			
UL CCA probability	P_{CCA_UL}		1.0	-	1.0	-
DL CCA probability for semi-static channel access Note 7, 8	P_{CCA_DL}		0.9375	-	0.9375	-
DL CCA probability for dynamic channel access Note 8, 9	$P_{CCA_DL_1}$		0.75	-	0.75	-
	$P_{CCA_DL_2}$		0.75	-	0.75	-
Duplex mode	Config 1,2		TDD			
TDD configuration	Config 1,2		TDDConf.1.1 CCA			
Downlink initial BWP configuration			DLBWP.0.1			
Downlink dedicated BWP configuration			DLBWP.1.1			
Uplink initial BWP configuration			ULBWP.0.1			
Uplink dedicated BWP configuration			ULBWP.1.1			
DRX Cycle configuration		ms	Not Applicable			

TRS Configuration		Config 1,2		TRS.1.2 TDD		TRS.1.2 TDD	
PDSCH Reference measurement channel		Config 1,2		SR.1.1 CCA		SR1.1 CCA	
RMSI CORESET Reference Channel		Config 1,2		CR.1.1 CCA		CR.1.1 CCA	
Dedicated CORESET Reference Channel		Config 1,2		CCR.1.1 CCA		CCR.1.1 CCA	
OCNG Patterns				OP.1			
SS-RSSI-Measurement				Not Applicable			
Time offset with Cell 2		Config 1,2	µs	3 (for Cell 3)	3	3 (for Cell 3)	3
DBT Window Configuration		Config 1,2		DBT.1			
SSB configuration		Config 1,2		SSB.1 CCA for semi-static channel access SSB.2 CCA for dynamic channel access			
SMTC configuration		Config 1,2		SMTC.1			
PDSCH/PDCCH subcarrier spacing		Config 1,2	kHz	30			
EPRE ratio of PSS to SSS			dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		NR_CCA_FR1_I	dBm/15kHz	-93		-112	
		NR_CCA_FR1_J				-111.5	
N_{oc} Note2	Config 1,2	NR_CCA_FR1_I	dBm/SCS	-90		-109	
		NR_CCA_FR1_J				-108.5	
$\hat{E}_s / I_{ot}$			dB	0	-3.19	-5.46	-5.46
$\hat{E}_s / N_{oc}$			dB	4.54	2.66	-4	-4
SS-RSRP Note3	Config 1,2	NR_CCA_FR1_I	dBm/SCS	-85.46	-87.34	-113	-113
		NR_CCA_FR1_J				-112.5	-112.5
SS-SINR Note3		NR_CCA_FR1_I	dB	0	-3.19	-5.46	-5.46
		NR_CCA_FR1_J					
Io Note3	Config 1,2	NR_CCA_FR1_I	dBm/38.16MHz	-51.41		-75.41	
		NR_CCA_FR1_J				-74.91	
Propagation condition			-	AWGN			
Antenna configuration			-	1x2			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: NR operating band groups are as defined in Clause 3.5.2.

Note 6:	For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configuration
Note 7:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 8:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 9:	For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

A.10.5.3.3.3 Test Requirements

The SS-SINR measurement accuracy shall fulfil the requirements in clause 10.1.31.1.1.

A.10.5.4 L1-RSRP measurement for beam reporting with CCA serving cell

A.10.5.4.1 SSB based L1-RSRP measurement

A.10.5.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.33.1 for L1-RSRP measurements based on SSB with the testing configurations for NR cells in Table A.10.5.4.1.1-1.

Table A.10.5.4.1.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
1	LTE FDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations	

A.10.5.4.1.2 Test parameters

In this set of test cases there are two cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell under CCA (Cell 2). Cell 2 operates on a carrier frequency with CCA and transmits SSBs in DBT window according to DL CCA model.

Two sub-tests (Test 1 and Test 2) are provided with different N_{oc} on Cell 2. The test parameters and applicability for Cell 1 are defined in A.3.7A.2. The test parameters for the Cell 2 are given in Table A.10.5.4.1.2-1 below. The absolute and relative accuracy of L1-RSRP measurements are tested by using the parameters in Table A.10.5.4.1.2-1.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

There is no measurement gap configured in the test. Before the test, UE is configured one SSB resource set with two SSB resources. UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSB resources 0 and 1.

Table A.10.5.4.1.2-1: FR1 SSB based L1-RSRP test parameters

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1,2		freq1	freq1
DL CCA model	1,2		As specifieed in A.3.20.2.1	As specifieed in A.3.20.2.1

UL CCA model		1,2		As specified in A.3.20.2.2	As specified in A.3.20.2.2
Duplex mode		1,2		TDD	TDD
TDD Configuration		1,2		TDDConf.1.1 CCA	TDDConf.1.1 CCA
$BW_{channel}$		1,2	MHz	40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
Duplex mode		1,2		TDD	TDD
TDD configuration		1,2		TDDConf.1.1 CCA	TDDConf.1.1 CCA
PDSCH Reference measurement channel		1,2		SR.1.1 CCA	SR.1.1 CCA
RMSI CORESET Reference Channel		1,2		CR.1.1 CCA	CR.1.1 CCA
Dedicated CORESET Reference Channel		1,2		CCR.1.1 CCA	CCR.1.1 CCA
SSB configuration for Semi-static channel access		1,2		SSB.3 CCA	SSB.3 CCA
SSB configuration for Dynamic channel access		1,2		SSB.4 CCA	SSB.4 CCA
OCNG Patterns		1,2		OP.1	OP.1
TRS configuration		1,2		TRS.1.2 TDD	TRS.1.2 TDD
Initial BWP Configuration		1,2		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration		1,2		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
DBT Window Configuration		1,2		DBT.1	DBT.1
reportConfigType		1,2		periodic	periodic
reportQuantity		1,2		ssb-Index-RSRP	ssb-Index-RSRP
Number of reported RS		1,2		2	2
L1-RSRP reporting period		1,2		slot80	slot80
EPRE ratio of PSS to SSS		1,2	dB	0	0
EPRE ratio of PBCH DMRS to SSS		1,2			
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
N_{oc} Note2	NR_TDD_FR1_I	1,2	dBm/15kHz	-94.65	[-113]
N_{oc} Note2	NR_TDD_FR1_I	1,2	dBm/SCS	-91.65	[-110]
$\hat{E}_s / I_{ot}$		1,2	dB	10	-3
SS-RSRP Note3	NR_TDD_FR1_I	1,2	dBm/SCS	-81.65	[-113]
Io Note3	NR_TDD_FR1_I	1,2	dBm/ 38.16MHz	-50.19	[-77.19]
$\hat{E}_s / N_{oc}$		1,2	dB	10	-3
Propagation condition		1,2		AWGN	AWGN
Antenna configuration		1,2		1x2	1x2

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification

A.10.5.4.1.3 Test Requirements

In both Test 1 and Test 2, the L1-RSRP measurement accuracy for SSB#0 and SSB#1 of Cell 2 shall fulfil the requirements in clauses 10.1.33.1.

A.10.5.5 RSSI

A.10.5.5.1 RSSI measurement accuracy on PSCC with CCA

A.10.5.5.1.1 Test Purpose and Environment

The purpose of this test is to verify that the RSSI measurement accuracy is within the specified limits. This test will partially verify the RSSI measurement accuracy requirements in Section 10.1.34.1.

A.10.5.5.1.2 Test parameters

In all test cases, Cell 1 is E-UTRAN PCell on a licensed band, and Cell 2 is PSCell operating on a carrier frequency under CCA. RSSI is measured on channel number 1. Supported test configurations are shown in table A.10.5.5.1.2-1. The accuracy of RSSI intra-frequency measurements is tested by using the parameters in A.10.5.5.1.2-2 and A.10.5.5.1.2-3. The E-UTRAN PCell setting refers to Table A.3.7.2.1-1.

Table A.10.5.5.1.2-1: RSSI supported test configurations

Configuration	Description
1	LTE FDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
2	LTE TDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
NOTE: The UE is only required to pass in one of the supported test configurations above.	

Table A.10.5.5.1.2-2: RSSI test parameters

Parameter		Configurations	Unit	Test 1
				Cell 2
RF Channel Number				1
$BW_{channel}$			MHz	40
SSB configuration	Semi-static channel access Note 1, 3	1,2		SSB.1 CCA
	Dynamic channel access Note 2, 3	1,2		SSB.2 CCA
P_{CCA_DL}				TBD
P_{CCA_UL}				TBD

DL CCA model			As specifieed in A.3.20.2.1
UL CCA model			As specified in A.3.20.2.2
Measurement bandwidth		n_{PRB}	Same as channel access bandwidth
Channel access bandwidth		MHz	20
DRX Cycle configuration		ms	Not Applicable
PDSCH Reference measurement channel			SR.1.1 CCA
RMSI CORESET Reference Channel			CR.1.1 CCA
Dedicated CORESET Reference Channel			CCR.1.1 CCA
OCNG Patterns			OP.1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-106
N_{oc} in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-87
$\hat{E}_s / I_{ot}$ in slots not corresponding to RSSI measurement time configuration (RMTC)		dB	2.5
$\hat{E}_s / I_{ot}$ in slots corresponding to RSSI measurement time configuration (RMTC)		dB	-Infinity
SS-RSRP in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-103.5
SS-RSRP in slots corresponding to RSSI measurement time configuration (RMTC)			-Infinity
Io within measurement bandwidth in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/BW	-101.6
Io within measurement bandwidth in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/BW	-87
Propagation condition		-	AWGN
Note 1: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 2: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. Note 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.			

Table A.10.5.5.1.2-3: RSSI RMTC parameters

measDurationSymbols-r16	sym14or12
rmtc-Periodicity-r16	ms40
rmtc-SubframeOffset-r16	20
ref-SCS-CP-r16	kHz15
ReportInterval	ms120

A.10.5.5.1.3 Test Requirements

The average RSSI measurement accuracy shall fulfil the requirements in sections 10.1.34.1. The nominal RSSI used to evaluate the requirement shall be based on Io in slots corresponding to RSSI measurement time configuration (RMTC).

A.10.5.5.2 RSSI measurement accuracy on SCC with CCA

A.10.5.5.2.1 Test Purpose and Environment

The purpose of this test is to verify that the RSSI measurement accuracy is within the specified limits. This test will partially verify the RSSI measurement accuracy requirements in Section 10.1.34.1.

A.10.5.5.2.2 Test parameters

In all test cases, Cell 1 is E-UTRAN PCell on a licensed band, Cell 2 is PSCell operating on a carrier frequency under CCA, Cell 3 is SCell on a carrier frequency under CCA. RSSI is measured on channel number 2. Supported test configurations are shown in table A.10.5.5.2.2-1. The accuracy of RSSI intra-frequency measurements is tested by using the parameters in A.10.5.5.2.2-2 and A.10.5.5.2.2-3. The E-UTRAN PCell setting refers to Table A.3.7.2.1-1.

Table A.10.5.5.2.2-1: RSSI supported test configurations

Configuration	Description
1	LTE FDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
2	LTE TDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
NOTE: The UE is only required to pass in one of the supported test configurations above.	

Table A.10.5.5.2.2-2: RSSI test parameters

Parameter		Configurations	Unit	Test 1	
				Cell 2	Cell 3
RF Channel Number				1	2
$BW_{channel}$			MHz	40	40
SSB configuration	Semi-static channel access Note 1, 3	1,2		SSB.1 CCA	SSB.1 CCA
	Dynamic channel access Note 2, 3	1,2		SSB.2 CCA	SSB.2 CCA
P_{CCA_DL}				1	TBD
P_{CCA_UL}				1	TBD
DL CCA model				N/A	As specifieed in A.3.20.2.1
UL CCA model				N/A	As specified in A.3.20.2.2
Measurement bandwidth			n_{PRB}	Same as channel access bandwidth	
Channel access bandwidth			MHz	20	
DRX Cycle configuration			ms	Not Applicable	
PDSCH Reference measurement channel				SR.1.1 CCA	SR.1.1 CCA
RMSI CORESET Reference Channel				CR.1.1 CCA	CR.1.1 CCA

Dedicated CORESET Reference Channel			CCR.1.1 CCA	CCR.1.1 CCA
OCNG Patterns			OP.1	OP.1
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-106	-106
N_{oc} in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-106	-87
$\hat{E}_s / I_{ot}$ in slots not corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	2.5
$\hat{E}_s / I_{ot}$ in slots corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	-Infinity
SS-RSRP in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-103.5	-103.5
SS-RSRP in slots corresponding to RSSI measurement time configuration (RMTC)			-103.5	-Infinity
Io within measurement bandwidth in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/BW	-101.6	-101.6
Io within measurement bandwidth in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/BW	-101.6	-87
Propagation condition		-	AWGN	
Note 1: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 2: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. Note 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.				

Table A.10.5.5.2.2-3: RSSI RMTC parameters

measDurationSymbols-r16	sym14or12
rmtc-Periodicity-r16	ms40
rmtc-SubframeOffset-r16	20
ref-SCS-CP-r16	kHz15

ReportInterval	ms120

A.10.5.5.2.3 Test Requirements

The average RSSI measurement accuracy shall fulfil the requirements in sections 10.1.34.1. The nominal RSSI used to evaluate the requirement shall be based on Io in slots corresponding to RSSI measurement time configuration (RMTC).

A.10.5.5.3 Inter-frequency RSSI measurement accuracy on a carrier with CCA

A.10.5.5.3.1 Test Purpose and Environment

The purpose of this test is to verify that the RSSI measurement accuracy is within the specified limits. This test will partially verify the RSSI measurement accuracy requirements in Section 10.1.34.2.

A.10.5.5.3.2 Test parameters

In all test cases, Cell 1 is E-UTRAN PCell on a licensed band, Cell 2 is PSCell operating on a carrier frequency under CCA, and Cell 3 is the neighbour with CCA. RSSI is measured on channel number 2. Supported test configurations are shown in table A.10.5.5.3.2-1. The accuracy of RSSI inter-frequency measurements is tested by using the parameters in A.10.5.5.3.2-2 and A.10.5.5.3.2-3. The E-UTRAN PCell setting refers to Table A.3.7.2.1-1.

Table A.10.5.5.3.2-1: RSSI supported test configurations

Configuration	Description
1	LTE FDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
2	LTE TDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
NOTE: The UE is only required to pass in one of the supported test configurations above.	

Table A.10.5.5.3.2-2: RSSI test parameters

Parameter		Configurations	Unit	Test 1	
				Cell 2	Cell 3
RF Channel Number				1	2
$BW_{channel}$			MHz	40	40
SSB configuration	Semi-static channel access Note 1, 3	1,2		SSB.1 CCA	SSB.1 CCA
	Dynamic channel access Note 2, 3	1,2		SSB.2 CCA	SSB.2 CCA
P_{CCA_DL}				1	TBD
P_{CCA_UL}				1	TBD
DL CCA model				N/A	As specifieed in A.3.20.2.1
UL CCA model				N/A	As specified in A.3.20.2.2
Measurement bandwidth			n_{PRB}	Same as channel access bandwidth	
Channel access bandwidth			MHz	20	
DRX Cycle configuration			ms	Not Applicable	
PDSCH Reference measurement channel				SR.1.1 TDD	NA

RMSI CORESET Reference Channel			CR.1.1 TDD	NA
Dedicated CORESET Reference Channel			CCR.1.1 TDD	NA
OCNG Patterns			OP.1	NA
EPRE ratio of PSS to SSS		dB	0	NA
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-106	-106
N_{oc} in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-106	-87
$\hat{E}_s / I_{ot}$ in slots not corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	2.5
$\hat{E}_s / I_{ot}$ in slots corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	-Infinity
SS-RSRP in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-103.5	-103.5
SS-RSRP in slots corresponding to RSSI measurement time configuration (RMTC)			-103.5	-Infinity
Io within measurement bandwidth in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/BW	-101.6	-101.6
Io within measurement bandwidth in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/BW	-101.6	-87
Propagation condition		-	AWGN	
Note 1: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 2: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. Note 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.				

Table A.10.5.5.3.2-3: RSSI RMTC parameters

measDurationSymbols-r16	sym14or12
rmtc-Periodicity-r16	ms40

rmtc-SubframeOffset-r16	20
ref-SCS-CP-r16	kHz15
ReportInterval	ms120

A.10.5.5.3.3 Test Requirements

The average RSSI measurement accuracy shall fulfil the requirements in sections 10.1.34.2. The nominal RSSI used to evaluate the requirement shall be based on Io in slots corresponding to RSSI measurement time configuration (RMTC).

A.10.5.6 Channel occupancy

A.10.5.6.1 Channel occupancy measurement accuracy on PSCC with CCA

A.10.5.6.1.1 Test Purpose and Environment

The purpose of this test is to verify that the channel occupancy measurement accuracy is within the specified limits. This test will partially verify the channel occupancy measurement accuracy requirements in Section 10.1.35.1.

A.10.5.6.1.2 Test parameters

In all test cases, Cell 1 is E-UTRAN PCell on a licensed band, and Cell 2 is PSCell operating on a carrier frequency under CCA. Channel occupancy is measured on channel number 1. Supported test configurations are shown in table A.10.5.6.1.2-1. The accuracy of channel occupancy intra-frequency measurements is tested by using the parameters in A.10.5.6.1.2-2 and A.10.5.6.1.2-3. The E-UTRAN PCell setting refers to Table A.3.7.2.1-1.

Table A.10.5.6.1.2-1: CO supported test configurations

Configuration	Description
1	LTE FDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
2	LTE TDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
NOTE: The UE is only required to pass in one of the supported test configurations above.	

Table A.10.5.6.1.2-2: CO test parameters

Parameter		Configurations	Unit	Test 1
				Cell 2
RF Channel Number				1
$BW_{channel}$			MHz	40
SSB configuration	Semi-static channel access Note 1, 3	1,2		SSB.1 CCA
	Dynamic channel access Note 2, 3	1,2		SSB.2 CCA
P_{CCA_DL}				TBD
P_{CCA_UL}				TBD
DL CCA model				As specifieed in A.3.20.2.1
UL CCA model				As specified in A.3.20.2.2
Measurement bandwidth			n_{PRB}	Same as channel access bandwidth
Channel access bandwidth			MHz	20
DRX Cycle configuration			ms	Not Applicable

PDSCH Reference measurement channel			SR.1.1 CCA
RMSI CORESET Reference Channel			CR.1.1 CCA
Dedicated CORESET Reference Channel			CCR.1.1 CCA
OCNG Patterns			OP.1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-106
N_{oc} in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-87
$\hat{E}_s / I_{ot}$ in slots not corresponding to RSSI measurement time configuration (RMTC)		dB	2.5
$\hat{E}_s / I_{ot}$ in slots corresponding to RSSI measurement time configuration (RMTC)		dB	-Infinity
SS-RSRP in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-103.5
SS-RSRP in slots corresponding to RSSI measurement time configuration (RMTC)			-Infinity
Io within measurement bandwidth in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/BW	-101.6
Io within measurement bandwidth in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/BW	-87
Propagation condition		-	AWGN
channelOccupancyThreshold		dBm	-83
Note 1: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 2: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. Note 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.			

Table A.10.5.6.1.2-3: CO RMTC parameters

measDurationSymbols-r16	sym14or12
rmtc-Periodicity-r16	ms40
rmtc-SubframeOffset-r16	20
ref-SCS-CP-r16	kHz15
ReportInterval	ms120

A.10.5.6.1.3 Test Requirements

The nominal reported *channelOccupancy* shall be TBD. At least 90% of channel occupancy reports made by the UE shall indicate this value.

A.10.5.6.2 Channel occupancy measurement accuracy on SCC with CCA

A.10.5.6.2.1 Test Purpose and Environment

The purpose of this test is to verify that the channel occupancy measurement accuracy is within the specified limits. This test will partially verify the channel occupancy measurement accuracy requirements in Section 10.1.35.1.

A.10.5.6.2.2 Test parameters

In all test cases, Cell 1 is E-UTRAN PCell on a licensed band, Cell 2 is PSCell operating on a carrier frequency under CCA, Cell 3 is SCell on a carrier frequency under CCA. Channel occupancy is measured on channel number 2. Supported test configurations are shown in table A.10.5.6.2.2-1. The accuracy of channel occupancy intra-frequency measurements is tested by using the parameters in A.10.5.6.2.2-2 and A.10.5.6.2.2-3. The E-UTRAN PCell setting refers to Table A.3.7.2.1-1.

Table A.10.5.6.2.2-1: CO supported test configurations

Configuration	Description
1	LTE FDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
2	LTE TDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
NOTE: The UE is only required to pass in one of the supported test configurations above.	

Table A.10.5.6.2.2-2: CO test parameters

Parameter		Configurations	Unit	Test 1	
				Cell 2	Cell 3
RF Channel Number				1	2
$BW_{channel}$			MHz	40	40
SSB configuration	Semi-static channel access Note 1, 3	1,2		SSB.1 CCA	SSB.1 CCA
	Dynamic channel access Note 2, 3	1,2		SSB.2 CCA	SSB.2 CCA
P_{CCA_DL}				1	TBD
P_{CCA_UL}				1	TBD
DL CCA model				N/A	As specifieed in A.3.20.2.1
UL CCA model				N/A	As specified in A.3.20.2.2
Measurement bandwidth			n_{PRB}	Same as channel access bandwidth	
Channel access bandwidth			MHz	20	
DRX Cycle configuration			ms	Not Applicable	
PDSCH Reference measurement channel				SR.1.1 CCA	SR.1.1 CCA
RMSI CORESET Reference Channel				CR.1.1 CCA	CR.1.1 CCA
Dedicated CORESET Reference Channel				CCR.1.1 CCA	CCR.1.1 CCA
OCNG Patterns				OP.1	OP.1
EPRE ratio of PSS to SSS			dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					

EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-106	-106
N_{oc} in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-106	-87
$\hat{E}_s / I_{ot}$ in slots not corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	2.5
$\hat{E}_s / I_{ot}$ in slots corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	-Infinity
SS-RSRP in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-103.5	-103.5
SS-RSRP in slots corresponding to RSSI measurement time configuration (RMTC)			-103.5	-Infinity
Io within measurement bandwidth in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/BW	-101.6	-101.6
Io within measurement bandwidth in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/BW	-101.6	-87
Propagation condition		-	AWGN	
channelOccupancyThreshold		dBm	-83	
Note 1: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 2: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. Note 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.				

Table A.10.5.6.2.2-3: CO RMTC parameters

measDurationSymbols-r16	sym14or12
rmtc-Periodicity-r16	ms40
rmtc-SubframeOffset-r16	20
ref-SCS-CP-r16	kHz15
ReportInterval	ms120

A.10.5.6.2.3 Test Requirements

The nominal reported *channelOccupancy* shall be TBD. At least 90% of channel occupancy reports made by the UE shall indicate this value.

A.10.5.6.3 Inter-frequency channel occupancy measurement accuracy on a carrier with CCA

A.10.5.6.3.1 Test Purpose and Environment

The purpose of this test is to verify that the channel occupancy measurement accuracy is within the specified limits. This test will partially verify the channel occupancy measurement accuracy requirements in Section 10.1.35.2.

A.10.5.6.3.2 Test parameters

In all test cases, Cell 1 is E-UTRAN PCell on a licensed band, Cell 2 is PSCell operating on a carrier frequency under CCA, and Cell 3 is the neighbour with CCA. Channel occupancy is measured on channel number 2. Supported test configurations are shown in table A.10.5.6.3.2-1. The accuracy of channel occupancy inter-frequency measurements is tested by using the parameters in A.10.5.6.3.2-2 and A.10.5.6.3.2-3. The E-UTRAN PCell setting refers to Table A.3.7.2.1-1.

Table A.10.5.6.3.2-1: CO supported test configurations

Configuration	Description
1	LTE FDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
2	LTE TDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
NOTE: The UE is only required to pass in one of the supported test configurations above.	

Table A.10.5.5.3.2-2: CO test parameters

Parameter		Configurations	Unit	Test 1	
				Cell 2	Cell 3
RF Channel Number				1	2
$BW_{channel}$			MHz	40	40
SSB configuration	Semi-static channel access Note 1, 3	1,2		SSB.1 CCA	SSB.1 CCA
	Dynamic channel access Note 2, 3	1,2		SSB.2 CCA	SSB.2 CCA
P_{CCA_DL}				1	TBD
P_{CCA_UL}				1	TBD
DL CCA model				N/A	As specifieed in A.3.20.2.1
UL CCA model				N/A	As specified in A.3.20.2.2
Measurement bandwidth			n_{PRB}	Same as channel access bandwidth	
Channel access bandwidth			MHz	20	
DRX Cycle configuration			ms	Not Applicable	
PDSCH Reference measurement channel				SR.1.1 TDD	NA
RMSI CORESET Reference Channel				CR.1.1 TDD	NA

Dedicated CORESET Reference Channel			CCR.1.1 TDD	NA
OCNG Patterns			OP.1	NA
EPRE ratio of PSS to SSS		dB	0	NA
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-106	-106
N_{oc} in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-106	-87
$\hat{E}_s / I_{ot}$ in slots not corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	2.5
$\hat{E}_s / I_{ot}$ in slots corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	-Infinity
SS-RSRP in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-103.5	-103.5
SS-RSRP in slots corresponding to RSSI measurement time configuration (RMTC)			-103.5	-Infinity
Io within measurement bandwidth in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/BW	-101.6	-101.6
Io within measurement bandwidth in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/BW	-101.6	-87
Propagation condition		-	AWGN	
channelOccupancyThreshold		dBm	-83	
Note 1: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 2: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. Note 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.				

Table A.10.5.6.3.2-3: CO RMTC parameters

measDurationSymbols-r16	sym14or12
rmtc-Periodicity-r16	ms40
rmtc-SubframeOffset-r16	20

ref-SCS-CP-r16	kHz15
ReportInterval	ms120

A.10.5.6.3.3 Test Requirements

The nominal reported *channelOccupancy* shall be TBD. At least 90% of channel occupancy reports made by the UE shall indicate this value.

A.11 NR Standalone Tests with NR PCell under CCA and Other NR Cells in FR1

Editor's note: Test cases for NR SA with NR PCell under CCA and SCell under CCA are also included here.

A.11.1 RRC_IDLE state mobility

A.11.1.1 Cell re-selection with both source and target NR carrier frequencies under CCA

A.11.1.1.1 Cell reselection to FR1 intra-frequency NR cells when subject to CCA on the serving and target cell

A.11.1.1.1.1 Test Purpose and Environment

This test is to verify the requirement for the intra frequency NR cell reselection requirements subject to CCA specified in clause 4.2A.2.3. Supported test configurations are shown in table A. 11.1.1.1.2-1.

A.11.1.1.1.2 Test Parameters

The test scenario comprises of 1 NR carrier that is subject to CCA and 2 cells as given in tables A.11.1.1.1.2-1, A.11.1.1.1.2-2 and A.11.1.1.1.2-3. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Only cell 1 is already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2.

Table A.11.1.1.1.2-1: Supported test configurations

Configuration	Description
1	With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Table A.11.1.1.1.2-2: General test parameters for intra frequency NR cell re-selection test case when subject to CCA

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1	Cell1	
	Neighbour cells		1	Cell2	
T2 end condition	Active cell		1	Cell2	
	Neighbour cells		1	Cell1	
Final condition	Active cell		1	Cell1	
RF Channel Number			1	1	
Time offset between cells			1	3 μs	Synchronous cells
Access Barring Information		-	1	Not Sent	No additional delays in random access procedure.
SSB configuration	Semi-static channel access		1	SSB.1 CCA	(As defined in A.3.10A)
	Dynamic channel access			SSB.2 CCA	
DBT Window Configuration			1	DBT.1	As specified in clause A.3.28.1.

SMTC confituration			SMTC.1	
DL CCA model		1	As specified in clause A.3.26.2.1	
UL CCA model		1	As specified in clause A.3.26.2.2	
DRX cycle length	s	1	1.28	The value shall be used for all cells in the test.
PRACH configuration index		1	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell		1	Not configured	
T1	s	1	>7	During T1, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed, The intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T2
T2	s	1	40	T2 needs to be defined so that cell re-selection reaction time is taken into account.
T3	s	1	15	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.11.1.1.1.2-3: Cell specific test parameters for intra frequency NR cell re-selection test case in AWGN when subject to CCA

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1	TDDConf.1.1 CCA			TDDConf.1.1 CCA		
DL CCA probability for semi-static channel access (P_{CCA_DL})		1	0.9			0.9		
DL CCA probability for for dynamic static channel access ($P_{CCA_DL_1}$)		1	0.75			0.75		
DL CCA probability for for dynamic static channel access ($P_{CCA_DL_2}$)		1	0.5			0.5		
UL CCA probability P_{CCA_UL}		1	1			1		
$M_{d,max}$		1	16			16		
$M_{m,max}$		1	4			4		
$M_{e,max}$		1	8			8		
PDSCH RMC		1	SR.1.1 CCA			SR.1.1 CCA		
RMSI CORESET		1	CR.1.1 CCA			CR.1.1 CCA		
Dedicated CORESET		1	CCR.1.1 CCA			CCR.1.1 CCA		
OCNG Pattern		1	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1	SSB			SSB		
Qrxlevmin	dBm/SCS	1	-127			-127		
Pcompensation	dB	1	0			0		
$Qhyst_s$	dB	1	0			0		
$Qoffset_{s,n}$	dB	1	0			0		
Cell_selection_and_ reselection_quality_measurement		1	SS-RSRP			SS-RSRP		
$\hat{E}_s / I_{ot}$	dB	1	16	-3.11	2.79	-infinity	2.79	-3.11

N_{oc} Note2	dBm/SCS	1	-95					
N_{oc} Note2	dBm/15 kHz	1	-98					
$\hat{E}_s / N_{oc}$	dB	1	16	13	16	-infinity	16	13
SS-RSRP Note3	dBm/SCS	1	-79	-82	-79	-infinity	-79	-82
Io	dBm/38.16 MHz	1	-47.85	-46.12	-46.12	Same as parameters specified in Cell 1 columns-		
Treselection	s	1	0	0	0	0	0	0
SintrasearchP	dB	1	50			50		
Propagation Condition		1	AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

A.11.1.1.1.3 Test Requirements

The cell reselection delay to a newly detectable cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 2.

The cell re-selection delay to a newly detectable cell shall be less than $(25 + M_d)*1.28 + T_{SI_CCA}$ s. M_d is the number of DRX cycles with at least one SMTC where there are no SSBs available during the T_{detect,NR_Intra_CCA}. If $M_d > M_{d,max}$ the UE is required to restart the detection of Cell 2.

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 1.

The cell re-selection delay to an already detected cell shall be less than $(5+M_e)*1.28 + T_{SI_CCA}$ s. M_e is the number of DRX cycles with at least one SMTC where there are no SSBs available during the $T_{evaluate,NR_Intra_CCA}$. If $M_e > M_{e,max}$ the UE is required to restart the evaluation of Cell 2.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a newly detectable cell can be expressed as: $T_{detect,\ NR_Intra_CCA} + T_{SI_CCA}$, and to an already detected cell can be expressed as: $T_{evaluate,\ NR_\ intra_CCA} + T_{SI_CCA}$,

Where:

- $T_{detect,\ NR_Intra_CCA}$ See Table 4.2A.2.3-1 in clause 4.2A.2.3
- $T_{evaluate,\ NR_\ intra_CCA}$ See Table 4.2A.2.3-1 in clause 4.2A.2.3
- T_{SI_CCA} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell.

This gives a total of $(25 + M_d)*1.28 + T_{SI_CCA}$ s for the cell re-selection delay to a newly detectable cell and $(5+M_e)*1.28 + T_{SI_CCA}$ s for the cell re-selection delay to an already detected cell in the test case.

A.11.1.1.2 Cell reselection to FR1 inter-frequency NR case when subject to CCA on the serving and target cell

A.11.1.1.2.1 Test Purpose and Environment

This test is to verify the requirement for the inter frequency NR cell reselection requirements subject to CCA specified in clause 4.2A.2.4. Supported test configurations are shown in table A.11.1.1.2.2-1.

A.11.1.1.2.2 Test Parameters

The test scenario comprises of 2 cells on 2 different NR carriers that are subject to CCA respectively as given in tables A.11.1.1.2.2-1, A.11.1.1.2.2-2 and A.11.1.1.2.2-3. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas and cell 2 is of higher priority than cell 1.

Table A.11.1.1.2.2-1: Supported test configurations

Configuration	Description of cell 1 with CCA	Description of cell 2 with CCA
1	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Table A.11.1.1.2.2-2: General test parameters for FR1 inter frequency NR cell re-selection test case when subject to CCA

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1	Cell2	The UE camps on cell 2 in the initial phase and during T1 period the UE reselects to cell 1
T1 end condition	Active cell		1	Cell1	The UE shall perform reselection to cell 1 during T1
	Neighbour cells		1	Cell2	
T3 end condition	Active cell		1	Cell2	The UE shall perform reselection to cell 2 with higher priority during T3
RF Channel Number			1	1, 2	
Time offset between cells			1	3 μs	Synchronous cells
Access Barring Information		-	1	Not Sent	No additional delays in random access procedure.
SSB configuration	Semi-static channel access		1	SSB.1 CCA (As defined in A.3.10A)	
	Dynamic channel access			SSB.2 CCA (As defined in A.3.10A)	
DBT Window Configuration			1	DBT.1	As specified in clause A.3.28.1.
SMTC configuration			1	SMTC.1	
DL CCA model			1	As specified in clause A.3.26.2.1	
UL CCA model			1	As specified in clause A.3.26.2.2	
DRX cycle length		s	1	1.28	The value shall be used for all cells in the test.
PRACH configuration index			1	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2

rangeToBestCell		1	Not configured	
T1	s	1	15	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2	s	1	>7	During T2, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T3.
T3	s	1	75	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.11.1.1.2.2-3: Cell specific test parameters for FR1 inter frequency NR cell re-selection test case in AWGN

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1	TDDConf.1.1 CCA			TDDConf.1.1 CCA		
DL CCA probability for semi-static channel access (P_{CCA_DL})		1	0.9			0.9		
DL CCA probability for for dynamic static channel access ($P_{CCA_DL_1}$)		1	0.75			0.75		
DL CCA probability for for dynamic static channel access ($P_{CCA_DL_2}$)		2	0.5			0.5		
UL CCA probability P_{CCA_UL}		1	1			1		
$M_{d,max}$		1	16			16		
$M_{m,max}$		1	4			4		
$M_{e,max}$		1	8			8		
PDSCH RMC		1	SR.1.1 CCA			SR.1.1 CCA		
RMSI CORESET		1	CR.1.1 CCA			CR.1.1 CCA		
Dedicated CORESET		1	CCR.1.1 CCA			CCR.1.1 CCA		
OCNG Pattern		1	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1	SSB			SSB		
Qrxlevmin	dBm/SCS	1	-137			-137		
Pcompensation	dB	1	0			0		
$Qhyst_s$	dB	1	0			0		
$Qoffset_{s,n}$	dB	1	0			0		
Cell_selection_and_reselection_quality_measurement		1	SS-RSRP			SS-RSRP		
$\hat{E}_s / I_{ot}$	dB	1	14	14	14	-4	-infinity	12
N_{oc} Note2	dBm/SCS	1	-95					

N_{oc} Note2	dBm/15 kHz	1	-98					
$\hat{E}_s / N_{oc}$	dB	1	14	14	14	-4	-infinity	12
SS-RSRP Note3	dBm/SCS	1	-81	-81	-81	-99	-infinity	-83
Io	dBm/38.16 MHz	1	-49.79	-49.79	-49.79	-62.50	-infinity	-51.69
Treselection	s	1	0	0	0	0	0	0
SnonintrasearchP	dB	1	50			50		
$Thresh_{x, high}$	dB	1	48			48		
$Thresh_{serving, low}$	dB	1	44			44		
$Thresh_{x, low}$	dB	1	50			50		
Propagation Condition		1	AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

A.11.1.1.2.3 Test Requirements

The cell reselection delay to a higher priority cell is defined as the time from the beginning of time period T3, to the moment when the UE camps again on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a higher priority cell shall be less than $60 + 1.28 \times (5 + M_e) + T_{SI_CCA}$ s. M_e is the number of DRX cycles with at least one SMTC where there are no SSBs available during the $T_{evaluate,NR_Intra_CCA}$. If $M_e > M_{e,max}$ the UE is required to restart the evaluation of cell 2.

The cell reselection delay to a lower priority cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 1.

The cell re-selection delay to a lower priority cell shall be less than $1.28 \times (5 + M_e) + T_{SI_CCA}$ s. M_e is the number of DRX cycles with at least one SMTC where there are no SSBs available during the $T_{evaluate,NR_Intra_CCA}$. If $M_e > M_{e,max}$ the UE is required to restart the evaluation of cell 2.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a higher priority cell can be expressed as: $T_{higher_priority_search} + T_{evaluate,\ NR_inter_CCA} + T_{SI_CCA}$, and to a lower priority cell can be expressed as: $T_{evaluate,\ NR_inter_CCA} + T_{SI_CCA}$,

Where:

- $T_{higher_priority_search}$ See clause 4.2.2.7
- $T_{evaluate,\ NR_inter_CCA}$ See Table 4.2A.2.4-1 in clause 4.2A.2.4
- T_{SI_CCA} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell.

This gives a total of 60 + 1.28 x (5 + M_e) + T_{SI_CCA} s for the cell re-selection delay to a higher priority cell and 1.28 x (5 + M_e) + T_{SI_CCA} s for the cell re-selection delay to a lower priority cell in the test case.

A.11.1.2 Cell re-selection to NR with source NR carrier frequency under CCA

A.11.1.2.1 Cell reselection to FR1 inter-frequency NR case when serving cell is subject to CCA

A.11.1.2.1.1 Test Purpose and Environment

This test is to verify the requirement for the inter frequency NR cell reselection requirements specified in clause 4.2.2.4 when the serving cell is subject to CCA. Supported test configurations are shown in table A.11.1.2.1.2-1.

A.11.1.2.1.2 Test Parameters

The test scenario comprises of 2 cells on 2 different NR carriers where the first carrier is subject to CCA as given in tables A.11.1.2.1.2-1, A.11.1.2.1.2-2 and A.11.1.2.1.2-3. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas and cell 2 is of higher priority than cell 1.

Table A.11.1.2.1.2-1: Supported test configurations

Configuration	Description of a cell with CCA	Description of a cell without CCA
1	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.11.1.2.1.2-2: General test parameters for FR1 inter frequency NR cell re-selection test case when serving cell is subject to CCA

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3	Cell2	The UE camps on cell 2 which is subject to CCA in the initial phase and during T1 period the UE reselects to cell 1 which is an inter-frequency NR cell
T1 end condition	Active cell		1, 2, 3	Cell1	The UE shall perform reselection to cell 1 during T1
	Neighbour cells		1, 2, 3	Cell2	
T3 end condition	Active cell		1, 2, 3	Cell2	The UE shall perform reselection to cell 2 with higher priority during T3
RF Channel Number			1, 2, 3	1, 2	
Time offset between cells			1	3 ms	Asynchronous cells
			2	3 μs	Synchronous cells
			3	3 μs	Synchronous cells
Access Barring Information		-	1, 2, 3	Not Sent	No additional delays in random access procedure.

SSB configuration		1	Cell 1: SSB.1 FR1 Cell 2: SSB.1 CCA for semi-static channel access; Cell 2: SSB.2 CCA for dynamic channel access	
		2	Cell 1: SSB.1 FR1 Cell 2: SSB.1 CCA for semi-static channel access; Cell 2: SSB.2 CCA for dynamic channel access	
		3	Cell 1: SSB.2 FR1 Cell 2: SSB.1 CCA for semi-static channel access; Cell 2: SSB.2 CCA for dynamic channel access	
SMTC configuration		1	Cell 1: SMTC pattern 2 Cell 2: N/A	
		2	Cell 1: SMTC pattern 1 Cell 2: N/A	
		3	Cell 1: SMTC pattern 1 Cell 2: N/A	
DBT Window Configuration		1, 2, 3	Cell 1: N/A Cell 2: DBT.1	As specified in clause A.3.28.1.
DL CCA model		1, 2, 3	Cell 1: N/A Cell 2: As specified in clause A.3.26.2.1	
UL CCA model		1, 2, 3	Cell 1: N/A Cell 2: As specified in clause A.3.26.2.2	
DRX cycle length	s	1, 2, 3	1.28	The value shall be used for all cells in the test.
PRACH configuration index		1, 2, 3	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell		1, 2, 3	Not configured	
T1	s	1, 2, 3	15	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2	s	1, 2, 3	>7	During T2, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T3.
T3	s	1, 2, 3	75	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.11.1.2.1.2-3: Cell specific test parameters for FR1 inter frequency NR cell re-selection test case in AWGN when serving cell is subject to CCA

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1	N/A			TDDConf.1.1.CCA		
		2	TDDConf.1.1			TDDConf.1.1.CCA		
		3	TDDConf.2.1			TDDConf.1.1.CCA		

DL CCA probability for semi-static channel access (P_{CCA_DL})		1, 2, 3	N/A			0.9		
DL CCA probability for for dynamic static channel access ($P_{CCA_DL_1}$)		1, 2, 3	N/A			0.75		
DL CCA probability for for dynamic static channel access ($P_{CCA_DL_2}$)		1, 2, 3	N/A			0.5		
UL CCA probability P_{CCA_UL}		1, 2, 3	N/A			1		
$M_{d,max}$		1, 2, 3	N/A			16		
$M_{m,max}$		1, 2, 3	N/A			4		
$M_{e,max}$		1, 2, 3	N/A			8		
PDSCH RMC configuration		1	SR.1.1 FDD			SR.1.1 CCA		
		2	SR.1.1 TDD			SR.1.1 CCA		
		3	SR.2.1 TDD			SR.1.1 CCA		
RMSI CORESET RMC configuration		1	CR.1.1 FDD			CR.1.1 CCA		
		2	CR.1.1 TDD			CR.1.1 CCA		
		3	CR.2.1 TDD			CR.1.1 CCA		
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD			CCR.1.1 CCA		
		2	CCR.1.1 TDD			CCR.1.1 CCA		
		3	CCR.2.1 TDD			CCR.1.1 CCA		
OCNG Pattern		1, 2, 3	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2, 3	SSB			SSB		
Qrxlevmin	dBm/SCS	1, 2	-140			-137		
		3	-137			-137		
Pcompensation	dB	1, 2, 3	0			0		
Cell_selection_and_reselection_quality_measurement		1, 2, 3	SS-RSRP			SS-RSRP		
$\hat{E}_s / I_{ot}$	dB	1	14	14	14	-4	-infinity	12
		2						
		3						
N_{oc} Note2	dBm/SCS	1	-98			-95		
		2	-98			-95		
		3	-95					
N_{oc} Note2	dBm/15 kHz	1	-98					
		2						
		3						
$\hat{E}_s / N_{oc}$	dB	1	14	14	14	-4	-infinity	12
		2						
		3						
SS-RSRP Note3	dBm/SCS	1	-84	-84	-84	-102	-infinity	-83
		2	-84	-84	-84	-102	-infinity	-83
		3	-81	-81	-81	-99	-infinity	-83
Io	dBm/9.36 MHz	1	-55.88	-55.88	-55.88	-68.60	--	--
	dBm/9.36 MHz	2	-55.88	-55.88	-55.88	-68.60	--	--
	dBm/38.16 MHz	3	-49.79	-49.79	-49.79	-62.50	-63.96	-51.69
Treselection	s	1, 2, 3	0	0	0	0	0	0

SnonintrasearchP	dB	1, 2, 3	50	50
$Thresh_{X, highP}$	dB	1, 2, 3	48	48
$Thresh_{serving, lowP}$	dB	1, 2, 3	44	44
$Thresh_{X, lowP}$	dB	1, 2, 3	50	50
Propagation Condition		1, 2, 3	AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

A.11.1.2.1.3 Test Requirements

The cell reselection delay to a higher priority cell is defined as the time from the beginning of time period T3, to the moment when the UE camps again on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a higher priority cell shall be less than 60 + 1.28 x (5 + M_e) + T_{SI_CCA} s. M_e is the number of DRX cycles with at least one SMTC where there are no SSBs available during the $T_{evaluate,NR_Intra_CCA}$. If $M_e > M_{e,max}$ the UE is required to restart the evaluation of cell 2.

The cell reselection delay to a lower priority cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 1.

The cell re-selection delay to a lower priority cell shall be less than 8 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a higher priority cell can be expressed as: $T_{higher_priority_search}$ + $T_{evaluate,\ NR_inter_CCA}$ + T_{SI_CCA}, and to a lower priority cell can be expressed as: $T_{evaluate,\ NR_inter}$ + $T_{SI\text{-}NR}$.

Where:

- $T_{higher_priority_search}$ See clause 4.2.2.7
- $T_{evaluate,\ NR_inter_CCA}$ See Table 4.2A.2.4-1 in clause 4.2A.2.4
- T_{SI_CCA} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell.
- $T_{evaluate,\ NR_inter}$ See Table 4.2.2.4-1 in clause 4.2.2.4
- $T_{SI\text{-}NR}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test cases.

This gives a total of 60 + 1.28 x (5 + M_e) + T_{SI_CCA} s for the cell re-selection delay to a higher priority cell and 7.68 s for the cell re-selection delay to a lower priority cell in the test case, which we allow 8 s.

A.11.1.3 Cell re-selection from NR carrier with target NR carrier frequency under CCA

A.11.1.3.1 Cell reselection to FR1 inter-frequency NR case when target cell is subject to CCA

A.11.1.3.1.1 Test Purpose and Environment

This test is to verify the requirement for the inter frequency NR cell reselection requirements specified in clause 4.2A.2.4 when the target cell is subject to CCA. Supported test configurations are shown in table A. 11.1.3.1.2-1.

A.11.1.3.1.2 Test Parameters

The test scenario comprises of 2 cells on 2 different NR carriers where the second carrier is subject to CCA as given in tables A.11.1.3.1.2-1, A.11.1.3.1.2-2 and A.11.1.3.1.2-3. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas and cell 2 is of higher priority than cell 1.

Table A.11.1.3.1.2-1: Supported test configurations

Configuration	Description of a cell without CCA	Description of a cell with CCA
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.		

Table A.11.1.3.1.2-2: General test parameters for FR1 inter frequency NR cell re-selection test case when target cell is subject to CCA

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3	Cell2	The UE camps on cell 2 which is an inter-frequency NR cell in the initial phase and during T1 period the UE reselects to cell 1 which is cell subject to CCA
	Neighbour cell		1, 2, 3	Cell 1	
T1 end condition	Active cell		1, 2, 3	Cell1	The UE shall perform reselection to cell 1 during T1
	Neighbour cells		1, 2, 3	Cell2	
T3 end condition	Active cell		1, 2, 3	Cell2	The UE shall perform reselection to cell 2 with higher priority during T3
	Neighbour cell		1, 2, 3	Cell 1	
RF Channel Number			1, 2, 3	1, 2	
Time offset between cells			1	3 ms	Asynchronous cells
			2	3 μs	Synchronous cells
			3	3 μs	Synchronous cells
Access Barring Information		-	1, 2, 3	Not Sent	No additional delays in random access procedure.

SSB configuration		1	Cell 1: SSB.1 CCA for semi-static channel access; Cell 1: SSB.2 CCA for dynamic channel access; Cell 2: SSB.1 FR1	
		2	Cell 1: SSB.1 CCA for semi-static channel access; Cell 1: SSB.2 CCA for dynamic channel access; Cell 2: SSB.1 FR1	
		3	Cell 1: SSB.1 CCA for semi-static channel access; Cell 1: SSB.2 CCA for dynamic channel access; Cell 2: SSB.2 FR1	
SMTC configuration		1	Cell 1: SMTC.1 Cell 2: SMTC.2	
		2	Cell 1: SMTC.1 Cell 2: SMTC.1	
		3	Cell 1: SMTC.1 Cell 2: SMTC.1	
DBT Window Configuration		1, 2, 3	Cell 1: DBT.1 Cell 2: N/A	As specified in clause A.3.28.1.
DL CCA model		1, 2, 3	Cell 1: As specified in clause A.3.26.2.1 Cell 2: N/A	
UL CCA model		1, 2, 3	Cell 1: As specified in clause A.3.26.2.2 Cell 2: N/A	
DRX cycle length	s	1, 2, 3	1.28	The value shall be used for all cells in the test.
PRACH configuration index		1, 2, 3	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell		1, 2, 3	Not configured	
T1	s	1, 2, 3	15	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2	s	1, 2, 3	>7	During T2, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T3.
T3	s	1, 2, 3	75	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.11.1.3.1.2-3: Cell specific test parameters for FR1 inter frequency NR cell re-selection test case in AWGN when target cell is subject to CCA

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1	TDDConf.1.1.CCA			N/A		
		2	TDDConf.1.1.CCA			TDDConf.1.1		
		3	TDDConf.1.1.CCA			TDDConf.2.1		
DL CCA probability for semi-static channel access (P_{CCA_DL})		1, 2, 3	0.9			N/A		
DL CCA probability for for dynamic static channel access ($P_{CCA_DL_1}$)		1, 2, 3	0.75			N/A		
DL CCA probability for for dynamic static channel access ($P_{CCA_DL_2}$)		1, 2, 3	0.5			N/A		
UL CCA probability P_{CCA_UL}		1, 2, 3	1			N/A		
$M_{d,max}$		1, 2, 3	16			N/A		
$M_{m,max}$		1, 2, 3	4			N/A		
$M_{e,max}$		1, 2, 3	8			N/A		
PDSCH RMC configuration		1	SR.1.1 CCA			SR.1.1 FDD		
		2	SR.1.1 CCA			SR.1.1 TDD		
		3	SR.1.1 CCA			SR.2.1 TDD		
RMSI CORESET RMC configuration		1	CR.1.1 CCA			CR.1.1 FDD		
		2	CR.1.1 CCA			CR.1.1 TDD		
		3	CR.1.1 CCA			CR.2.1 TDD		
Dedicated CORESET RMC configuration		1	CCR.1.1 CCA			CCR.1.1 FDD		
		2	CCR.1.1 CCA			CCR.1.1 TDD		
		3	CCR.1.1 CCA			CCR.2.1 TDD		
OCNG Pattern		1, 2, 3	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2, 3	SSB			SSB		
Qrxlevmin	dBm/SCS	1, 2	-137			-140		
		3	-137			-137		
Pcompensation	dB	1, 2, 3	0			0		
Cell_selection_and_reselection_quality_measurement		1, 2, 3	SS-RSRP			SS-RSRP		
$\hat{E}_s / I_{ot}$	dB	1	14	14	14	-4	-infinity	12
		2						
		3						
N_{oc} Note2	dBm/SCS	1	-95			-98		
		2	-95			-98		
		3	-95					
N_{oc} Note2	dBm/15 kHz	1	-98					
		2						
		3						
$\hat{E}_s / N_{oc}$	dB	1	14	14	14	-4	-infinity	12
		2						

		3						
SS-RSRP Note3	dBm/SCS	1	-81	-81	-81	-102	-infinity	-86
		2	-81	-81	-81	-102	-infinity	-86
		3	-81	-81	-81	-99	-infinity	-83
Io	dBm/9.36 MHz	1	--	--	--	-68.60	-70.05	-57.78
	dBm/9.36 MHz	2	--	--	--	-68.60	-70.05	-57.78
	dBm/38.16 MHz	3	-49.79	-49.79	-49.79	-62.50	-63.96	-51.69
Treselection	s	1, 2, 3	0	0	0	0	0	0
SnonintrasearchP	dB	1, 2, 3	50			50		
$Thresh_{x, highP}$	dB	1, 2, 3	48			48		
$Thresh_{serving, lowP}$	dB	1, 2, 3	44			44		
$Thresh_{x, lowP}$	dB	1, 2, 3	50			50		
Propagation Condition		1, 2, 3	AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

A.11.1.3.1.3 Test Requirements

The cell reselection delay to a higher priority cell is defined as the time from the beginning of time period T3, to the moment when the UE camps again on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a higher priority cell shall be less than 68 s.

The cell reselection delay to a lower priority cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 1.

$1.28 \times (5 + M_e) + T_{SI_CCA}$ s. Me is the number of DRX cycles with at least one SMTC where there are no SSBs available during the $T_{evaluate,NR_Intra_CCA}$. If $M_e > M_{e,max}$ the UE is required to restart the evaluation of cell 2.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a higher priority cell can be expressed as: $T_{higher_priority_search} + T_{evaluate,\ NR_inter} + T_{SI\text{-}NR}$, and to a lower priority cell can be expressed as: $T_{evaluate,\ NR_inter} + T_{SI\text{-}NR}$.

Where:

- $T_{higher_priority_search}$ See clause 4.2.2.7
- $T_{evaluate,\ NR_inter_CCA}$ See Table 4.2A.2.4-1 in clause 4.2A.2.4
- T_{SI_CCA} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell.
- $T_{evaluate,\ NR_inter}$ See Table 4.2.2.4-1 in clause 4.2.2.4
- $T_{SI\text{-}NR}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 67.68 s, allow 68 s for the cell re-selection delay to a higher priority cell and 1.28 x (5 + M_e) + T_{SI_CCA} s for the cell re-selection delay to a lower priority cell in the test case.

A.11.1.4 Inter-RAT cell re-selection to E-UTRAN with source NR carrier frequency under CCA

A.11.1.4.1 Cell reselection to higher priority E-UTRAN when serving cell is subject to CCA

A.11.1.4.1.1 Test Purpose and Environment

This test is to verify the requirement for the NR cell subject to CCA to E-UTRAN inter-RAT cell reselection requirements specified in clause 4.2A.2.5 when the E-UTRAN cell is of higher priority.

A.11.1.4.1.2 Test Parameters

The test scenario comprises of one NR cell which is subject to CCA and one E-UTRAN cell as given in tables A.11.1.4.1.2-1, A.11.1.4.1.2-2, A.11.1.4.1.2-3 and A.11.1.4.1.2-4. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. NR cell 1 is already identified by the UE prior to the start of the test. E-UTRAN cell 2 is of higher priority than cell 1.

Table A.11.1.4.1.2-1: Supported test configurations

Configuration	Description of a cell with CCA	Description of a cell without CCA
1	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
2	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.11.1.4.1.2-2: General test parameters for NR cell subject to CCA to E-UTRAN cell re-selection test case

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell1	The UE camps on cell 1 in the initial phase and during T2 period the UE reselects to cell 2.
T2 end condition	Active cell		1, 2	Cell2	The UE shall perform reselection to cell 2 during T2.
	Neighbour cells		1, 2	Cell1	
T3 end condition	Active cell		1, 2	Cell1	The UE shall perform reselection to cell 1 during T3 for iteration of the tests.
	Neighbour cells		1, 2	Cell2	
Access Barring Information		-	1, 2	Not Sent	No additional delays in random access procedure.
SMTC configuration			1, 2	SMTC.1	
DBT Window Configuration			1, 2	DBT.1	As specified in clause A.3.28.1.

SSB configuration			Cell 1: SSB.1 CCA for semi-static channel access; Cell 1: SSB.2 CCA for dynamic channel access;	
DL CCA model		1, 2	As specified in clauseA.3.26.2.1	
UL CCA model		1, 2	As specified in clause A.3.26.2.2	
DRX cycle length	s	1, 2	1.28	The value shall be used for all cells in the test.
NR PRACH configuration index		1, 2	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
E-UTRAN PRACH configuration index		1	53	As specified in table 5.7.1-2 in TS 36.211 [23]
		2	4	
E-UTRAN PRACH configuration index		1	53	As specified in table 5.7.1-2 in TS 36.211 [23]
		2	4	
T1	s	1, 2	>7	During T1, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T2.
T2	s	1, 2	75	T2 needs to be defined so that cell re-selection reaction time is taken into account.
T3	s	1, 2	15	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.11.1.4.1.2-3: Cell specific test parameters for NR cell 1 subject to CCA

Parameter	Unit	Test configuration	Cell 1		
			T1	T2	T3
TDD configuration		1, 2	TDDConf.1.1.CCA		
DL CCA probability for semi-static channel access (P_{CCA_DL})		1, 2	0.9		
DL CCA probability for for dynamic static channel access ($P_{CCA_DL_1}$)		1, 2	0.75		
DL CCA probability for for dynamic static channel access ($P_{CCA_DL_2}$)		1, 2	0.5		
UL CCA probability P_{CCA_UL}		1, 2	1		
$M_{d,max}$		1, 2	16		
$M_{m,max}$		1, 2	4		
$M_{e,max}$		1, 2	8		
PDSCH parameters		1, 2	SR.1.1 CCA		
RMSI CORESET parameters		1, 2	CR.1.1 CCA		
Dedicated CORESET parameters		1, 2	CCR.1.1 CCA		
SSB parameters		1, 2	SSB.1 CCA for semi-static channel access; SSB.2 CCA for dynamic channel access		
NR SMTC parameters		1, 2	SMTC.1		
OCNG Pattern		1, 2	OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1, 2	DLBWP.0		
Initial UL BWP configuration		1, 2	ULBWP.0		
RLM-RS		1, 2	SSB		
Qrxlevmin	dBm/SCS	1, 2	-137		

N_{oc}	dBm/SCS	1, 2	-95		
N_{oc}	dBm/15 kHz	1, 2	-98		
SS-RSRP		1, 2	-81	-81	-81
$\hat{E}_s / I_{ot}$	dB	1, 2	14	14	14
$\hat{E}_s / N_{oc}$	dB	1, 2	14	14	14
Io	dBm/38.16 MHz	1, 2	-49.79	-49.79	-49.79
Treselection	S	1, 2	0		
Snonintrasearch	dB	1, 2	50		
$Thresh_{x, high (Note 2)}$	dB	1, 2	48		
$Thresh_{serving, low}$	dB	1, 2	44		
$Thresh_{x, low}$	dB	1, 2	50		
Propagation Condition		1, 2	AWGN		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: This refers to the value of $Thresh_{x, high}$ which is included in NR system information, and is a threshold for the E-UTRA target cell Note 3: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.					

Table A.11.1.4.1.2-4: Cell specific test parameters for E-UTRA cell 2

Parameter	Unit	Cell 2		
		T1	T2	T3
E-UTRA RF Channel number		1		
$BW_{channel}$	MHz	10		
OCNG Patterns defined in TS 36.133 [15] clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6		
PBCH_RA	dB	0		
PBCH_RB	dB			
PSS_RA	dB			
SSS_RA	dB			
PCFICH_RB	dB			
PHICH_RA	dB			
PHICH_RB	dB			
PDCCH_RA	dB			
PDCCH_RB	dB			
PDSCH_RA	dB			
PDSCH_RB	dB			
OCNG_RA Note 1	dB			
OCNG_RB Note 1	dB			
Qrxlevmin	dBm	-140		
N_{oc}	dBm/15 kHz	-98		
RSRP	dBm/15 KHz	-infinity	-86	-102
$\hat{E}_s / I_{ot}$	dB	-infinity	12	-4
$\hat{E}_s / N_{oc}$	dB	-infinity	12	-4
$Treselection_{EUTRAN}$	S	0		
Snonintrasearch	dB	50		
$Thresh_{x, high (Note 2)}$	dB	48		
$Thresh_{serving, low}$	dB	44		
$Thresh_{x, low}$	dB	50		

Propagation Condition		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 2: This refers to the value of $Thresh_{x, high}$ which is included in E-UTRA system information, and is a threshold for the NR target cell		

A.11.1.4.1.3 Test Requirements

The cell reselection delay to a higher priority E-UTRAN cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a higher priority cell shall be less than 68 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a higher priority cell can be expressed as: $T_{higher_priority_search} + T_{evaluate,\ E\text{-}UTRAN} + T_{SI\text{-}E\text{-}UTRA}$,

Where:

- $T_{higher_priority_search}$ See clause 4.2.2.7
- $T_{evaluate,\ E\text{-}UTRAN}$ See Table 4.2.2.5-1 in clause 4.2.2.5
- $T_{SI\text{-}E\text{-}UTRA}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 67.68 s, allow 68 s for the cell re-selection delay to a higher priority E-UTRAN cell.

A.11.1.4.2 Cell reselection to lower priority E-UTRAN when serving cell is subject to CCA

A.11.1.4.2.1 Test Purpose and Environment

This test is to verify the requirement for the NR cell subject to CCA to E-UTRAN inter-RAT cell reselection requirements specified in clause 4.2A.2.5 when the E-UTRAN cell is of lower priority.

The test scenario comprises of one NR cell and one E-UTRAN cell as given in tables A.11.1.4.2.1-1, A.11.1.4.2.1-2, A.11.1.4.2.1-3 and A.11.1.4.2.1-4. The test consists of three successive time periods, with time duration of T1 and T2 respectively. Both NR cell 1 and E-UTRAN cell 2 are already identified by the UE prior to the start of the test. E-UTRAN cell 2 is of lower priority than cell 1.

Table A.11.1.4.2.1-1: Supported test configurations

Configuration	Description of a cell with CCA	Description of a cell without CCA
1	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
2	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.11.1.4.2.1-2: General test parameters for NR cell subject to CCA to E-UTRAN cell re-selection test case

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell1	The UE camps on cell 1 in the initial phase.
T1 end condition	Active cell		1, 2	Cell2	The UE shall perform reselection to cell 2 during T1.
	Neighbour cells		1, 2	Cell1	
T2 end condition	Active cell		1, 2	Cell1	The UE shall perform reselection to cell 1 during T2 for iteration of the tests.
	Neighbour cells		1, 2	Cell2	
Access Barring Information		-	1, 2	Not Sent	No additional delays in random access procedure.
SMTC configuration			1, 2	SMTC.1	
DBT Window Configuration			1, 2	DBT.1	As specified in clause A.3.28.1.
DL CCA model			1, 2	As specified in clause A.3.26.2.1	
UL CCA model			1, 2	As specified in clause A.3.26.2.2	
DRX cycle length		s	1, 2	1.28	The value shall be used for all cells in the test.
NR PRACH configuration index			1, 2	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
E-UTRAN PRACH configuration index			1	53	As specified in table 5.7.1-2 in TS 36.211 [23]
			2	4	
T1		s	1, 2	15	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2		s	1, 2	75	T2 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.11.1.4.2.1-3: Cell specific test parameters for NR cell 1 subject to CCA

Parameter	Unit	Test configuration	Cell 1	
			T1	T2
TDD configuration		1, 2	TDDConf.1.1.CCA	
DL CCA probability for semi-static channel access (P_{CCA_DL})		1, 2	0.9	
DL CCA probability for for dynamic static channel access ($P_{CCA_DL_1}$)		1, 2	0.75	
DL CCA probability for for dynamic static channel access ($P_{CCA_DL_2}$)		1, 2	0.5	
UL CCA probability P_{CCA_UL}		1, 2	1	
$M_{d,max}$		1, 2	16	
$M_{m,max}$		1, 2	4	
$M_{e,max}$		1, 2	8	
PDSCH RMC configuration		1, 2	SR.1.1 CCA	
RMSI CORESET RMC Configuration		1, 2	CR.1.1 CCA	
Dedicated CORESET RMC Configuration		1, 2	CCR.1.1 CCA	
SSB configuration		1, 2	SSB.1 CCA for semi-static channel access; SSB.2 CCA for dynamic channel access	

SMTC configuration		1, 2	SMTC.1	
OCNG Pattern		1, 2	OP.1 defined in A.3.2.1	
Initial DL BWP configuration		1, 2	DLBWP.0	
Initial UL BWP configuration		1, 2	ULBWP.0	
RLM-RS		1, 2	SSB	
Qrxlevmin	dBm/SCS	1, 2	-137	
N_{oc}	dBm/SCS	1, 2	-95	
N_{oc}	dBm/15 kHz	1, 2	-98	
SS-RSRP	dBm/SCS	1, 2	-99	-83
$\hat{E}_s / I_{ot}$	dB	1, 2	-4	12
$\hat{E}_s / N_{oc}$	dB	1, 2	-4	12
Io	dBm/38.16 MHz	1, 2	-62.50	-51.69
Treselection	S	1, 2	0	
Snonintrasearch	dB	1, 2	50	
$Thresh_{x, high (Note 2)}$	dB	1, 2	48	
$Thresh_{serving, low}$	dB	1, 2	44	
$Thresh_{x, low}$	dB	1, 2	50	
Propagation Condition		1, 2	AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: This refers to the value of $Thresh_{x, high}$ which is included in NR system information, and is a threshold for the E-UTRA target cell Note 3: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.				

Table A.11.1.4.2.1-4: Cell specific test parameters for E-UTRA cell 2

Parameter	Unit	Cell 2	
		T1	T2
E-UTRA RF Channel number		1	
$BW_{channel}$	MHz	10	
OCNG Patterns defined in TS 36.133 [15] clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6	
PBCH_RA	dB	0	
PBCH_RB	dB		
PSS_RA	dB		
SSS_RA	dB		
PCFICH_RB	dB		
PHICH_RA	dB		
PHICH_RB	dB		
PDCCH_RA	dB		
PDCCH_RB	dB		
PDSCH_RA	dB		
PDSCH_RB	dB		
OCNG_RA[Note 1]	dB		
OCNG_RB[Note 1]	dB		

Qrxlevmin	dBm	-140	
N_{oc}	dBm/15 kHz	-98	
RSRP	dBm/15 KHz	-84	-84
$\hat{E}_s / I_{ot}$	dB	14	14
$\hat{E}_s / N_{oc}$	dB	14	14
$Treselection_{EUTRAN}$	S	0	
Snonintrasearch	dB	50	
$Thresh_{x, high (Note 2)}$	dB	48	
$Thresh_{serving, low}$	dB	44	
$Thresh_{x, low}$	dB	50	
Propagation Condition		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: This refers to the value of $Thresh_{x, high}$ which is included in E-UTRA system information, and is a threshold for the NR target cell			

A.11.1.4.2.2 Test Requirements

The cell reselection delay to a lower priority E-UTRAN cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a lower priority cell shall be less than 8 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a lower priority cell can be expressed as: $T_{evaluate, E-UTRAN} + T_{SI-E-UTRA}$,

Where:

- $T_{evaluate, E-UTRAN}$ See Table 4.2.2.5-1 in clause 4.2.2.5
- $T_{SI-E-UTRA}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 7.68 s, allow 8 s for the cell re-selection delay to a lower priority E-UTRAN cell.

A.11.2 RRC_CONNECTED state mobility

A.11.2.1 Handover

A.11.2.1.1 Intra-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA; known target cell

A.11.2.1.1.1 Test Purpose and Environment

This test is to verify the requirement for the NR intra frequency handover requirements from FR1 carrier under CCA to FR1 carrier under CCA specified in clause 6.1B.1.2.

A.11.2.1.1.2 Test Parameters

Supported test configurations are shown in table A.11.2.1.1.2-1. Both handover delay and interruption length are tested by using the parameters in table A.11.2.1.1.2-2, and A.11.2.1.1.2-3.

The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE may not have any timing information of cell 2.

NR shall send a RRC message implying handover to cell 2. The RRC message implying handover shall be sent to the UE during period T2, after the UE has reported Event A3. T3 is defined as the end of the last TTI containing the RRC message implying handover.

Table A.11.2.1.1.2-1: Intra-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA test configurations

Config	Description
1	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Table A.11.2.1.1.2-2: General test parameters Intra-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	On the carrier under CCA
	Neighbouring cell		Cell 2	On the carrier under CCA
Final condition	Active cell		Cell 2	On the carrier under CCA
DL CCA model	Dynamic channel access Note 1, 3		As specified in clause A.3.20.2.1	
	Semi-static channel access Note 2, 3			
UL CCA model	Dynamic channel access Note 1, 3		As specified in clause A.3.20.2.2	
	Semi-static channel access Note 2,3			
A3-Offset		dB	0	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T304		ms	500	
L_{CCA_DL}			5	
W_{CCA_DL}		ms	T304	
L_{CCA_UL}			5	
W_{CCA_UL}		ms	T304	
T1		s	5	
T2		s	≤ 5	
T3		s	≥ $T_{interrupt}$	$T_{interrupt}$ is defined in clause 6.1B.1.2

NOTE 1: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy.
NOTE 2: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy.
NOTE 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

Table A.11.2.1.1.2-3: Cell specific test parameters for NR FR1-FR1 Intra frequency handover test case

Parameter		Unit	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
NR RF Channel Number			1			1		
P_{CCA_DL} for dynamic channel access Note 4,6		-	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75			$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		
P_{CCA_DL} for semi-static channel access Note 5,6		-	P_{CCA_DL}=0.9375			P_{CCA_DL}=0.9375		
P_{CCA_UL} for dynamic channel access Note 4,6		-	0.75			0.75		
P_{CCA_UL} for semi-static channel access Note 5,6		-	0.87			0.87		
TDD configuration	Config 1		TDDConf.1.1 CCA					
$BW_{channel}$	Config 1		40: $N_{RB,c}$ = 106					
BWP BW	Config 1		40: $N_{RB,c}$ = 106					
DRX Cycle		ms	Not Applicable					
PDSCH Reference	Config 1		SR.1.1 CCA					
CORESET Reference Channel	Config 1		CR.1.1 CCA					
Dedicated CORESET RMC configuration	Config 1		CCR.1.1 CCA					
TRS configuration	Config 1		TRS.1.1 TDD					
OCNG Patterns			OP.1					
SMTC Configuration			SMTC.1					
DBT window configuration	Config 1		DBT.1					
SSB configuration for semi-static channel access Note 4, 6	Config 1		SSB.1 CCA					
SSB configuration for dynamic channel access Note 5, 6	Config 1		SSB.2 CCA					
ssb-PositionQCL	Config 1		[1]					
PDSCH/PDCCH subcarrier spacing	Config 1	kHz	30 kHz					
PUCCH/PUSCH subcarrier spacing	Config 1	kHz	30 kHz					
PRACH configuration			FR1 PRACH configuration 1 under CCA					
BWP configuration	Initial DL BWP		DLBWP.0.1					
	Dedicated DL BWP		DLBWP.1.1					
	Initial UL BWP		ULBWP.0.1					
	Dedicated UL BWP		ULBWP.1.1					
EPRE ratio of PSS to SSS		dB	0					
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} Note2		dBm/15kHz	-98					
N_{oc} Note2	Config 1	dBm/SCS	-95					
$\hat{E}_s / I_{ot}$		dB	8	-3.3	-3.3	-Infinity	2.36	2.36

$\hat{E}_s / N_{oc}$		dB	8	8	8	-Infinity	11	11
SSB_RP	Config 1	dBm/SCS	-87	-87	-87	-Infinity	-84	-84
Io[Note3]	Config 1	dBm/ 38.16MHz	-55.31	-50.96	-50.96	-55.31	-50.96	-50.96
Propagation condition		-	AWGN			AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 5: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 6: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

A.11.2.1.1.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than $T_{interrupt}$ from the beginning of time period T3, where $T_{interrupt}$ is defined in clause 6.1B.1.2
The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

$T_{interrupt} = T_{search} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin}$

$T_{search} = 0$.

$T_{processing} = 20$ ms.

$T_{margin} = 2$ ms.

$T_{\Delta} = (1+ L_2) *20$ ms.

$T_{IU} = (1+ L_3)*10 + 10$ ms

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2], L_2 is the number of SMTC occasions not available at the UE during the time tracking period where $L_2 \leq L_{CCA_DL}$, and L_3 is the number of consecutive SSB to PRACH occasion association periods during which no PRACH occasion is available for PRACH transmission due to UL CCA failure, where $L_3 \leq L_{CCA_UL}$. $L_3 = 0$ for Type 2C UL channel access procedure as defined in TS 37.213 [33]. The interruption time considering the potential extensions caused by L_1, L_2 , L_3 and by the UL CCA failure detection/recovery mechanism is limited by the T304 timer. The UE behaviour at the T304 timer expiry is detailed in TS 38.331 [2]. Test equipment should make sure that L_{CCA_DL} and L_{CCA_UL} are not exceeded during a test by monitoring the number of CCA failures and preventing additional CCA failures from happening after L_{CCA_DL} or L_{CCA_UL} is reached.

A.11.2.1.2 Intra-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA; unknown target cell

A.11.2.1.2.1 Test Purpose and Environment

This test is to verify the requirement intra frequency handover requirements from FR1 carrier under CCA to FR1 carrier under CCA specified in clause 6.1B.1.2.

A.11.2.1.2.2 Test Parameters

Supported test configurations are shown in table A.11.2.1.2.2-1. Both handover delay and interruption length are tested by using the parameters in table A.11.2.1.2.2-2, and A.11.2.1.2.2-3.

The test scenario comprises of two carriers and one cell on each carrier. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE receives a RRC handover command from the network. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

Table A.11.2.1.2.2-1: Intra-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA test configurations

Config	Description
1	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Table A.11.2.1.2.2-2: General test parameters Intra-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	On the carrier under CCA
	Neighbouring cell		Cell 2	On the carrier under CCA
Final condition	Active cell		Cell 2	On the carrier under CCA
DL CCA model	Dynamic channel access Note 1, 3		As specified in clause A.3.20.2.1	
	Semi-static channel access Note 2, 3			
UL CCA model	Dynamic channel access Note 1, 3		As specified in clause A.3.20.2.2	
	Semi-static channel access Note 2,3			
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T304		ms	500	
L_{CCA_DL}			5	
W_{CCA_DL}		ms	T304	
L_{CCA_UL}			5	
W_{CCA_UL}		ms	T304	
T1		s	5	
T2		s	≥ $T_{interrupt}$	$T_{interrupt}$ is defined in clause 6.1B.1.2
NOTE 1: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy. NOTE 2: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy. NOTE 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.				

Table A.11.2.1.2.2-3: Cell specific test parameters for NR FR1-FR1 Intra frequency handover test case

Parameter	Unit	Cell 1		Cell 2	
		T1	T2	T1	T2
NR RF Channel Number		1		1	
P_{CCA_DL} for dynamic channel access Note 4,6	-	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	

P_{CCA_DL} for semi-static channel access Note 5,6		-	P_{CCA_DL}=0.9375		P_{CCA_DL}=0.9375	
P_{CCA_UL} for dynamic channel access Note 4,6		-	0.75		0.75	
P_{CCA_UL} for semi-static channel access Note 5,6		-	0.87		0.87	
TDD configuration	Config 1		TDDConf.1.1 CCA			
$BW_{channel}$	Config 1		40: $N_{RB,c}$ = 106			
BWP BW	Config 1		40: $N_{RB,c}$ = 106			
DRX Cycle		ms	Not Applicable			
PDSCH Reference	Config 1		SR.1.1 CCA			
CORESET Reference Channel	Config 1		CR.1.1 CCA			
Dedicated CORESET RMC configuration	Config 1		CCR.1.1 CCA			
TRS configuration	Config 1		TRS.1.2 TDD			
OCNG Patterns			OP.1			
SMTC Configuration			SMTC.1			
DBT window configuration	Config 1		DBT.1			
SSB configuration for semi-static channel access Note 4, 6	Config 1		SSB.1 CCA			
SSB configuration for dynamic channel access Note 5, 6	Config 1		SSB.2 CCA			
ssb-PositionQCL	Config 1		[1]			
PDSCH/PDCCH subcarrier spacing	Config 1	kHz	30 kHz			
PUCCH/PUSCH subcarrier spacing	Config 1	kHz	30 kHz			
PRACH configuration			FR1 PRACH configuration 1 under CCA			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-98			
N_{oc} Note2	Config 1	dBm/SCS	-95			
$\hat{E}_s / I_{ot}$		dB	8	-0.64	-Infinity	-0.64
$\hat{E}_s / N_{oc}$		dB	8	8	-Infinity	8
SSB_RP	Config 1	dBm/SCS	-87	-87	-Infinity	-87
Io Note3	Config 1	dBm/ 38.16MHz	-55.31	-52.60	-55.31	-52.60
Propagation condition		-	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 5:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 6:	For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

A.11.2.1.2.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than $T_{interrupt}$ from the beginning of time period T3, where $T_{interrupt}$ is defined in clause 6.1B.1.2
The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

$T_{interrupt} = T_{search} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin}$

$T_{search} = (1+L_1)* 20$ ms.

$T_{processing} = 20$ ms.

$T_{margin} = 2$ ms.

$T_{\Delta} = (1+ L_2) *20$ ms.

$T_{IU} = (1+ L_3)*10 + 10$ ms

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2], L_1 is the number of SMTC occasions not available at the UE during the intra-frequency detection period, L_2 is the number of SMTC occasions not available at the UE during the time tracking period, where $L_1 + L_2 \leq L_{CCA_DL}$, and L_3 is the number of consecutive SSB to PRACH occasion association periods during which no PRACH occasion is available for PRACH transmission due to UL CCA failure, where $L_3 \leq L_{CCA_UL}$. $L_3 = 0$ for Type 2C UL channel access procedure as defined in TS 37.213 [33]. The interruption time considering the potential extensions caused by L_1, ,L_2 , L_3 and by the UL CCA failure detection/recovery mechanism is limited by the T304 timer.

A.11.2.1.3 Inter-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA; unknown target cell

A.11.2.1.3.1 Test Purpose and Environment

This test is to verify the requirement for inter frequency handover requirements from FR1 carrier under CCA to FR1 carrier under CCA specified in clause 6.1B.1.2.

A.11.2.1.3.2 Test Parameters

Supported test configurations are shown in table A.11.2.1.3.2-1. Both handover delay and interruption length are tested by using the parameters in table A.11.2.1.3.2-2, and A.11.2.1.3.2-3.

The test scenario comprises of two carriers and one cell on each carrier. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE receives a RRC handover command from the network. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

Table A.11.2.1.3.2-1: Inter-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA test configurations

Config	Description
1	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Table A.11.2.1.3.2-2: General test parameters Inter-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	On the carrier under CCA
	Neighbouring cell		Cell 2	On the carrier under CCA
Final condition	Active cell		Cell 2	On the carrier under CCA
DL CCA model	Dynamic channel access Note 1, 3		As specified in clause A.3.20.2.1	
	Semi-static channel access Note 2, 3			
UL CCA model	Dynamic channel access Note 1, 3		As specified in clause A.3.20.2.2	
	Semi-static channel access Note 2,3			
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
T304		ms	500	
L_{CCA_DL}			5	
W_{CCA_DL}		ms	T304	
L_{CCA_UL}			5	
W_{CCA_UL}		ms	T304	
T1		s	5	
T2		s	$\leq T_{interrupt}$	$T_{interrupt}$ is defined in clause 6.1B.1.2
NOTE 1: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy. NOTE 2: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy. NOTE 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.				

Table A.11.2.1.3.2-3: Cell specific test parameters for NR FR1-FR1 Inter frequency handover test case

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number			1		2	
P_{CCA_DL} for dynamic channel access Note 4,6		-	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	
P_{CCA_DL} for semi-static channel access Note 5,6		-	P_{CCA_DL}=0.9375		P_{CCA_DL}=0.9375	
P_{CCA_UL} for dynamic channel access Note 4,6		-	0.75		0.75	
P_{CCA_UL} for semi-static channel access Note 5,6		-	0.87		0.87	
TDD configuration	Config 1		TDDConf.1.1 CCA			
$BW_{channel}$	Config 1		40: $N_{RB,c}$ = 106			
BWP BW	Config 1		40: $N_{RB,c}$ = 106			
DRX Cycle		ms	Not Applicable			
PDSCH Reference	Config 1		SR.1.1 CCA			
CORESET Reference Channel	Config 1		CR1.1 CCA			

Dedicated CORESET RMC configuration	Config 1		CCR.1.1 CCA			
TRS configuration	Config 1		TRS.1.2 TDD			
OCNG Patterns			OP.1			
SMTC Configuration			SMTC.1			
DBT window configuration	Config 1		DBT.1			
SSB configuration for semi-static channel access Note 4, 6	Config 1		SSB.1 CCA			
SSB configuration for dynamic channel access Note 5, 6	Config 1		SSB.2 CCA			
ssb-PositionQCL	Config 1		[1]			
PDSCH/PDCCH subcarrier spacing	Config 1	kHz	30 kHz			
PUCCH/PUSCH subcarrier spacing	Config 1	kHz	30 kHz			
PRACH configuration			FR1 PRACH configuration 1 under CCA			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-98			
N_{oc} Note2	Config 1	dBm/SCS	-95			
$\hat{E}_s / I_{ot}$		dB	4	4	-Infinity	5
$\hat{E}_s / N_{oc}$		dB	4	4	-Infinity	5
SSB_RP	Config 1	dBm/SCS	-91	-91	-Infinity	-90
Io Note3	Config 1	dBm/ 38.16MHz	-58.49	-58.49	-63.94	-57.75
Propagation condition		-	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 5: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.

Note 6: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

A.11.2.1.3.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than $T_{interrupt}$ from the beginning of time period T3, where $T_{interrupt}$ is defined in clause 6.1B.1.2
The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

$T_{interrupt} = T_{search} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin}$

$T_{search} = (3+L_1')* 20$ ms.

$T_{processing} = 20$ ms.

$T_{margin} = 2$ ms.

$T_{\Delta} = (1+ L_2) *20$ ms.

$T_{IU} = (1+ L_3)*10 + 10$ ms

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2], L_1' is the number of SMTC occasions not available at the UE during the inter-frequency detection period, L_2 is the number of SMTC occasions not available at the UE during the time tracking period, where $L_1' + L_2 \leq L_{CCA_DL}$, and L_3 is the number of consecutive SSB to PRACH occasion association periods during which no PRACH occasion is available for PRACH transmission due to UL CCA failure, where $L_3 \leq L_{CCA_UL}$. $L_3 = 0$ for Type 2C UL channel access procedure as defined in TS 37.213 [33]. The interruption time considering the potential extensions caused by , L_1',L_2 , L_3 and by the UL CCA failure detection/recovery mechanism is limited by the T304 timer.

A.11.2.1.4 Inter-frequency handover from FR1 carrier under CCA to FR1; known target cell

A.11.2.1.4.1 Test Purpose and Environment

This test is to verify the requirement for the NR with CCA FR1-NR FR1 handover requirements specified in clause 6.1.1.2.

A.11.2.1.4.2 Test Parameters

Supported test configurations are shown in table A.11.2.1.4.2-1. Both handover delay and interruption length are tested by using the parameters in table A.11.2.1.4.2-2, and A.11.2.1.4.2-3.

The test consists of three successive time periods, with time durations of T1 T2 and T3 respectively. At the start of time duration T1, the UE may not have any timing information of cell 2.

NR with CCA shall send a RRC message implying handover to cell 2. The RRC message implying handover shall be sent to the UE during period T2, after the UE has reported Event A3. T3 is defined as the end of the last TTI containing the RRC message implying handover.

Table A.11.2.1.4.2-1: Handover from NR with CCA FR1 to NR FR1 test configuration

Config	Description
1	Source cell: NR with CCA 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cell: NR with CCA 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	Source cell: NR with CCA 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.11.2.1.4.2-2: General test parameters handover from NR with CCA FR1 to NR FR1

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	NR cell with CCA
	Neighbouring cell		Cell 2	NR cell
Final condition	Active cell		Cell 2	
DL CCA model			As specified in clause A.3.20.2.1	
UL CCA model			As specified in clause A.3.20.2.2	
A3-Offset		dB	0	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	≤5	
T3		s	1	

Table A.11.2.1.4.2-3: Cell specific test parameters for NR with CCA FR1 – NR FR1 handover test case

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
NR RF Channel Number		1,2,3	1			2		
Duplex mode		1	TDD			FDD		
		2	TDD			TDD		
		3	TDD			TDD		
TDD configuration		1	TDDConf.1.1 CCA			Not Applicable		
		2	TDDConf.1.1 CCA			TDDConf.1.1		
		3	TDDConf.1.1 CCA			TDDConf.2.1		
$BW_{channel}$	MHz	1	40: $N_{RB,c}$ = 106			10: $N_{RB,c}$ = 52		
		2	40: $N_{RB,c}$ = 106			10: $N_{RB,c}$ = 52		
		3	40: $N_{RB,c}$ = 106			40: $N_{RB,c}$ = 106		
BWP BW	MHz	1	40: $N_{RB,c}$ = 106			10: $N_{RB,c}$ = 52		
		2	40: $N_{RB,c}$ = 106			10: $N_{RB,c}$ = 52		
		3	40: $N_{RB,c}$ = 106			40: $N_{RB,c}$ = 106		
DRX Cycle	ms	1,2,3	Not Applicable					
PDSCH Reference measurement channel		1	SR.1.1 CCA			SR.1.1 FDD		
		2	SR.1.1 CCA			SR.1.1 TDD		
		3	SR.1.1 CCA			SR2.1 TDD		
CORESET Reference Channel		1	CR1.1 CCA			CR.1.1 FDD		
		2	CR1.1 CCA			CR.1.1 TDD		
		3	CR1.1 CCA			CR2.1 TDD		
Dedicated CORESET RMC configuration		1	CCR.1.1 CCA			CCR.1.1 FDD		
		2	CCR.1.1 CCA			CCR.1.1 TDD		
		3	CCR.1.1 CCA			CCR.2.1 TDD		
DL CCA probability for semi-static channel access (P_{CCA_DL})DL CCA probability P_{CCA_DL}		1,2,3	0.9375			N/A		

DL CCA probability for dynamic channel access ($P_{CCA_DL_1}$)			1,2,3	0.75			N/A		
DL CCA probability for dynamic channel access ($P_{CCA_DL_2}$)			1,2,3	0.75			N/A		
UL CCA probability for semi-static channel access P_{CCA_UL}			1,2,3	0.75			N/A		
UL CCA probability for dynamic static channel access P_{CCA_UL}			1,2,3	0.87					
TRS configuration			1	TRS.1.2 TDD			TRS.1.1 FDD		
			2	TRS.1.2 TDD			TRS.1.1 TDD		
			3	TRS.1.2 TDD			TRS.1.2 TDD		
OCNG Patterns				OP.1					
SMTC Configuration				SMTC.1					
SSB Configuration	Semi-static channel access		1,2	SSB.1 CCA (As defined in A.3.10A)			SSB.1 FR1		
	Dynamic channel access			SSB.2 CCA (As defined in A.3.10A)					
	Semi-static channel access		3	SSB.1 CCA (As defined in A.3.10A)			SSB.2 FR1		
	Dynamic channel access			SSB.2 CCA (As defined in A.3.10A)					
DBT window configuration				As defined in A.3.28.1			Not applicable		
PDSCH/PDCCH subcarrier spacing		kHz	1,2	30 kHz			15 kHz		
			3	30 kHz			30 kHz		
PUCCH/PUSCH subcarrier spacing		kHz	1,2	30 kHz			15 kHz		
			3	30 kHz			30 kHz		
PRACH configuration				FR1 PRACH configuration 1 under CCA			FR1 PRACH configuration 1		
BWP configuration	Initial DL BWP		1,2,3	DLBWP.0.1					
	Dedicated DL BWP		1,2,3	DLBWP.1.1					
	Initial UL BWP		1,2,3	ULBWP.0.1					
	Dedicated UL BWP		1,2,3	ULBWP.1.1					
EPRE ratio of PSS to SSS		dB	1,2,3	0					
EPRE ratio of PBCH DMRS to SSS			1,2,3						
EPRE ratio of PBCH to PBCH DMRS			1,2,3						
EPRE ratio of PDCCH DMRS to SSS			1,2,3						
EPRE ratio of PDCCH to PDCCH DMRS			1,2,3						
EPRE ratio of PDSCH DMRS to SSS			1,2,3						
EPRE ratio of PDSCH to PDSCH			1,2,3						
EPRE ratio of OCNG DMRS to SSS[Note1]			1,2,3						
EPRE ratio of OCNG to OCNG DMRS[Note1]			1,2,3						
N_{oc}[Note2]		dBm/SCS	1,2	[-101]			-98		
			3	[-101]			-95		
$\hat{E}_s / I_{ot}$		dB	1,2,3	8	-3.3	-3.3	-Infinity	2.36	2.36
$\hat{E}_s / N_{oc}$		dB	1,2,3	8	8	8	-Infinity	11	11
SSB_RP	Config 1	dBm/SCS	1,2,3	-90	-90	-90	-Infinity	-87	-87
Io[Note3]	Config 1	dBm/9.36MHz	1,2,3	-61.41	-57.06	-57.06	-61.41	-57.06	-57.06
Propagation condition		-	1,2,3	AWGN			AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

A.11.2.1.4.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 112 ms from the beginning of time period T3.
The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2].

$T_{interrupt}$ = 102 ms in the test. $T_{interrupt}$ is defined in clause 6.1.1.2.2.

This gives a total of 112 ms.

A.11.2.1.5 Inter-frequency handover from FR1 carrier under CCA to FR1; unknown target cell

A.11.2.1.5.1 Test Purpose and Environment

This test is to verify the requirement for the NR with CCA FR1-NR FR1 handover requirements specified in clause 6.1.1.2.

A.11.2.1.5.2 Test Parameters

Supported test configurations are shown in table A.11.2.1.5.2-1. Both handover delay and interruption length are tested by using the parameters in table A.11.2.1.5.2-2, and A.12.2.1.7.2-3.

The test scenario comprises of two carriers and one cell on each carrier. Cell 1 is the NR with CCA cell and Cell 2 is an NR neighbour cell. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1 and T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2.

Starting T2, cell 2 becomes detectable and the UE receives a RRC handover command from the network. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

Table A.11.2.1.5.2-1: Handover from NR with CCA FR1 to NR FR1 test configuration

Config	Description
1	Source cell: NR with CCA 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cell: NR with CCA 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	Source cell: NR with CCA 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.11.2.1.5.2-2: General test parameters handover from NR with CCA FR1 to NR FR1

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	NR cell with CCA

	Neighbouring cell		Cell 2	NR cell
Final condition	Active cell		Cell 2	
DL CCA model			As specified in clause A.3.20.2.1	
UL CCA model			As specified in clause A.3.20.2.2	
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	≤5	

Table A.11.2.1.5.2-3: Cell specific test parameters for NR with CCA FR1 – NR FR1 handover test case

Parameter	Unit	Configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number		1, 2, 3	1		2	
Duplex mode		1	TDD		FDD	
		2	TDD		TDD	
		3	TDD		TDD	
DL CCA model		1, 2, 3	As specified in clause A.3.26.2.1		N/A	
UL CCA model		1, 2, 3	As specified in clause A.3.26.2.2			
TDD configuration		1	TDDConf.1.1 CCA		Not Applicable	
		2	TDDConf.1.1 CCA		TDDConf.1.1	
		3	TDDConf.1.1 CCA		TDDConf.2.1	
$BW_{channel}$	MHz	1	40: $N_{RB,c}$ = 106		10: $N_{RB,c}$ = 52	
		2	40: $N_{RB,c}$ = 106		10: $N_{RB,c}$ = 52	
		3	40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
BWP BW	MHz	1	40: $N_{RB,c}$ = 106		10: $N_{RB,c}$ = 52	
		2	40: $N_{RB,c}$ = 106		10: $N_{RB,c}$ = 52	
		3	40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
DRX Cycle	ms		Not Applicable			
PDSCH Reference measurement channel		1	SR.1.1 CCA		SR.1.1 FDD	
		2	SR.1.1 CCA		SR.1.1 TDD	
		3	SR.1.1 CCA		SR2.1 TDD	
CORESET Reference Channel		1	CR2.1 TDD		CR.1.1 FDD	
		2	CR2.1 TDD		CR.1.1 TDD	
		3	CR2.1 TDD		CR2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 CCA		CCR.1.1 FDD	
		2	CCR.1.1 CCA		CCR.1.1 TDD	
		3	CCR.1.1 CCA		CCR.2.1 TDD	
TRS configuration		1	TRS.1.2 TDD		TRS.1.1 FDD	
		2	TRS.1.2 TDD		TRS.1.1 TDD	
		3	TRS.1.2 TDD		TRS.1.2 TDD	
DL CCA probability for semi-static channel access (P_{CCA_DL})DL CCA probability P_{CCA_DL}		1, 2, 3	0.9375		N/A	
DL CCA probability for dynamic channel access ($P_{CCA_DL_1}$)		1, 2, 3	0.75		N/A	
DL CCA probability for dynamic channel access ($P_{CCA_DL_2}$)		1, 2, 3	0.75		N/A	
UL CCA probability for semi-static channel access P_{CCA_UL}		1, 2, 3	0.75		N/A	

UL CCA probability for dynamic static channel access P_{CCA_UL}		1, 2, 3	0.87		N/A	
OCNG Patterns		1, 2, 3	OP.1			
SMTC Configuration		1, 2, 3	SMTC.1			
DBT window configuration		1, 2, 3	As defined in A.3.28.1		N/A	
SSB configuration	Semi-static channel access	1,2	SSB.1 CCA (As defined in A.3.10A)		SSB.1 FR1	
	Dynamic channel access		SSB.2 CCA (As defined in A.3.10A)			
	Semi-static channel access	3	SSB.1 CCA (As defined in A.3.10A)		SSB.2 FR1	
	Dynamic channel access		SSB.2 CCA (As defined in A.3.10A)			
ssb-PositionQCL			[1]		N/A	
PDSCH/PDCCH subcarrier spacing	kHz	1	30 kHz		15 kHz	
		2	30 kHz		15 kHz	
		3	30 kHz		30 kHz	
PUCCH/PUSCH subcarrier spacing	kHz	1	30 kHz		15 kHz	
		2	30 kHz		15 kHz	
		3	30 kHz		30 kHz	
PRACH configuration		1,2,3	FR1 PRACH configuration 1		FR1 PRACH configuration 1 under CCA	
BWP configuration	Initial DL BWP	1,2,3	DLBWP.0.1			
	Dedicated DL BWP	1,2,3	DLBWP.1.1			
	Initial UL BWP	1,2,3	ULBWP.0.1			
	Dedicated UL BWP	1,2,3	ULBWP.1.1			
EPRE ratio of PSS to SSS	dB	1,2,3	0			
EPRE ratio of PBCH DMRS to SSS		1,2,3				
EPRE ratio of PBCH to PBCH DMRS		1,2,3				
EPRE ratio of PDCCH DMRS to SSS		1,2,3				
EPRE ratio of PDCCH to PDCCH DMRS		1,2,3				
EPRE ratio of PDSCH DMRS to SSS		1,2,3				
EPRE ratio of PDSCH to PDSCH		1,2,3				
EPRE ratio of OCNG DMRS to SSS[Note1]		1,2,3				
EPRE ratio of OCNG to OCNG DMRS[Note1]		1,2,3				
N_{oc}[Note2]	dBm/SCS	1,2,3	[-101]		-98	
			[-101]		-95	
$\hat{E}_s / I_{ot}$	dB	1,2,3	-Infinity	5	4	4
$\hat{E}_s / N_{oc}$	dB	1,2,3	-Infinity	5	4	4
SSB_RP	dBm/SCS	1,2,3	-Infinity	-93	-94	-94
			-Infinity	-90	-91	-91
Io[Note3]	dBm/ 9.36MHz	1,2,3	-70.05	-63.85	-64.59	-64.59
	dBm/ 38.16MHz	1,2,3	-63.94	-57.75	-58.49	-58.49
Propagation condition	-	1,2,3	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

A.11.2.1.5.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 132 ms from the beginning of time period T2.
The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2].

$T_{interrupt}$ = 122 ms in the test. $T_{interrupt}$ is defined in clause 6.1.1.2.2.

This gives a total of 132 ms.

A.11.2.1.6 Inter-frequency handover from FR1 to FR1 carrier under CCA; unknown target cell

A.11.2.1.6.1 Test Purpose and Environment

This test is to verify the requirement for inter frequency handover requirements from FR1 to FR1 carrier under CCA specified in clause 6.1B.1.2.

A.11.2.1.6.2 Test Parameters

Supported test configurations are shown in table A.11.2.1.6.2-1. Both handover delay and interruption length are tested by using the parameters in table A.11.2.1.6.2-2, and A.11.2.1.6.2-3.

The test scenario comprises of two carriers and one cell on each carrier. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE receives a RRC handover command from the network. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

Table A.11.2.1.6.2-1: Inter-frequency handover from FR1 to FR1 carrier under CCA test configurations

Configuration	Description of a cell with CCA	Description of a cell without CCA
1	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations		

Table A.11.2.1.6.2-2: General test parameters Inter-frequency handover from FR1 to FR1 carrier under CCA

Parameter	Unit	Value	Comment

Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	On the carrier under CCA
Final condition	Active cell		Cell 2	On the carrier under CCA
DL CCA model			As specified in clause A.3.20.2.1	
UL CCA model			As specified in clause A.3.20.2.2	
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
T1		s	5	
T2		s	≤ $T_{interrupt}$	$T_{interrupt}$ is defined in clause 6.1B.1.2

Table A.11.2.1.6.2-3: Cell specific test parameters for NR FR1-FR1 Inter frequency handover test case

Parameter	Unit	Configuration	Cell 1		Cell 2	
			T1	**T2**	**T1**	**T2**
NR RF Channel Number		1, 2, 3	1		2	
DL CCA probability for semi-static channel access (P_{CCA_DL})DL CCA probability P_{CCA_DL}		1, 2, 3	N/A		0.9375	
DL CCA probability for dynamic channel access ($P_{CCA_DL_1}$)		1, 2, 3	N/A		0.75	
DL CCA probability for dynamic channel access ($P_{CCA_DL_2}$)		1, 2, 3	N/A		0.75	
UL CCA probability for semi-static channel access P_{CCA_UL}		1, 2, 3	N/A		0.75	
UL CCA probability for dynamic static channel access P_{CCA_UL}		1, 2, 3	N/A		0.87	
TDD configuration		1	N/A		TDDConf.1.1.CCA	
		2	TDDConf.1.1		TDDConf.1.1.CCA	
		3	TDDConf.1.2		TDDConf.1.1.CCA	
$BW_{channel}$		1	10: $N_{RB,c}$ = 52		40: $N_{RB,c}$ = 106	
		2	10: $N_{RB,c}$ = 52		40: $N_{RB,c}$ = 106	
		3	40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
BWP BW		1	10: $N_{RB,c}$ = 52		40: $N_{RB,c}$ = 106	
		2	10: $N_{RB,c}$ = 52		40: $N_{RB,c}$ = 106	
		3	40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
DRX Cycle	ms		Not Applicable			
PDSCH Reference		1	SR.1.1 FDD		SR.1.1 CCA	
		2	SR.1.1 TDD		SR.1.1 CCA	
		3	SR.2.1 TDD		SR.1.1 CCA	
CORESET Reference Channel		1	CR.1.1 FDD		CR.1.1 CCA	
		2	CR.1.1 TDD		CR.1.1 CCA	
		3	CR.2.1 TDD		CR.1.1 CCA	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		CCR.1.1 CCA	
		2	CCR.1.1 TDD		CCR.1.1 CCA	
		3	CCR.2.1 TDD		CCR.1.1 CCA	
TRS configuration		1	TRS.1.1 FDD		TRS.1.2 TDD	
		2	TRS.1.1 TDD		TRS.1.2 TDD	
		3	TRS.1.2 TDD		TRS.1.2 TDD	
OCNG Patterns		1, 2, 3	OP.1			
SMTC Configuration		1, 2, 3	SMTC.1			
DBT window configuration		1, 2, 3	N/A		As defined in A.3.28.1	

SSB configuration			1, 2	SSB.1 FR1		SSB.1 CCA for semi-static channel access; SSB.2 CCA for dynamic channel access;	
			3	SSB.2 FR1		SSB.1 CCA for semi-static channel access; SSB.2 CCA for dynamic channel access;	
ssb-PositionQCL				N/A		[1]	
PDSCH/PDCCH subcarrier spacing		kHz	1	15 kHz		30 kHz	
			2	15 kHz		30 kHz	
			3	30 kHz		30 kHz	
PUCCH/PUSCH subcarrier spacing		kHz	1	15 kHz		30 kHz	
			2	15 kHz		30 kHz	
			3	30 kHz		30 kHz	
PRACH configuration				FR1 PRACH configuration 1		FR1 PRACH configuration 1 CCA	
BWP configuration	Initial DL BWP		1, 2, 3	DLBWP.0.1			
	Dedicated DL BWP		1, 2, 3	DLBWP.1.1			
	Initial UL BWP		1, 2, 3	ULBWP.0.1			
	Dedicated UL BWP		1, 2, 3	ULBWP.1.1			
EPRE ratio of PSS to SSS		dB		0			
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		dBm/15kHz		-98			
N_{oc} Note2	Config 1	dBm/SCS	1, 2	-98			
			3	-95			
$\hat{E}_s / I_{ot}$		dB		4	4	-Infinity	5
$\hat{E}_s / N_{oc}$		dB		4	4	-Infinity	5
SSB_RP	Config 1	dBm/SCS	1, 2	-94	-94	-Infinity	-93
			3	-91	-91	-Infinity	-90
Io Note3	Config 1	dBm/ 9.36MHz	1, 2	-64.59	-64.59	-70.05	-63.85
		dBm/ 38.16MHz	3	-58.49	-58.49	-63.94	-57.75
Propagation condition		-		AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4:	For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

A.11.2.1.6.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than $T_{interrupt}$ from the beginning of time period T3, where $T_{interrupt}$ is defined in clause 6.1B.1.2
The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2], L_1' is the number of SMTC occasions not available at the UE during the inter-frequency detection period, L_2 is the number of SMTC occasions not available at the UE during the time tracking period, and L_3 is the number of consecutive SSB to PRACH occasion association periods during which no PRACH occasion is available for PRACH transmission due to UL CCA failure. L_3 = 0 for Type 2C UL channel access procedure as defined in TS 37.213 [33]. The interruption time considering the potential extensions caused by L_1, L_1´,L_2 , L_3 and by the UL CCA failure detection/recovery mechanism is limited by the T304 timer. The UE behaviour at the T304 timer expiry is detailed in TS 38.331 [2].

A.11.2.1.7 SA NR FR1 carrier under CCA - E-UTRAN handover with known target cell

A.11.2.1.7.1 Test Purpose and Environment

The purpose of this set of tests is to verify that the UE can make correct inter-RAT E-UTRAN handover when operating in standalone (SA) operation with PCell in FR1 carrier under CCA. This test shall verify the NR to E-UTRAN handover requirements as specified in clause 6.1.2.1.

The test comprises of one NR carrier under CCA and one E-UTRA carrier. There are two cells and one cell on each carrier. Cell 1 is the NR PCell and Cell 2 is an inter-RAT E-UTRAN neighbour cell. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE does not have any timing information of Cell 2. Starting T2, Cell 2 becomes detectable and the UE is expected to detect and send a measurement report. Gap pattern configuration with id #0 as specified in Table 9.1.2-1 is configured before T2 begins to enable inter-RAT frequency monitoring.

A RRC message implying handover shall be sent to the UE during period T2 after the UE has reported Event B2. The start of T3 is the instant when the last TTI containing the RRC message implying handover is sent to the UE. The handover message shall contain Cell 2 as the target cell.

Supported test configurations are shown in table A.11.2.1.7-1. General test parameters are provided in Table A.11.2.1.7-2. Cell specific test parameters for Cell 1 and Cell 2 are provided in Tables A.11.2.1.7-3 and A.11.2.1.7-4 respectively.

Table A.11.2.1.7-1: Supported test configurations for SA inter-RAT E-UTRAN handover tests

Configuration	Description of a cell with CCA	Description of a cell without CCA
1	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
2	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations. Note 2: The UE supporting SA operation only on NR band(s) with shared spectrum access is required to be tested.		

Table A.11.2.1.7-2: General test parameters for SA inter-RAT E-UTRAN handover

Parameter		Unit	Value	Comment
NR RF Channel Number			1	1 NR carrier frequency is used in the test
LTE RF Channel Number			2	1 E-UTRAN carrier frequency is used in the test
Initial conditions	Active cell		Cell 1	NR cell on a carrier under CCA
	Neighbouring cell		Cell 2	E-UTRAN cell
Final condition	Active cell		Cell 2	
DL CCA model			As specified in clause A.3.20.2.1	
UL CCA model			As specified in clause A.3.20.2.2	
NR measurement quantity			SS-RSRP	
E-UTRAN measurement quantity			RSRP	
b2-Threshold1		dBm	As specified in Table A.11.2.1.7-3	Absolute NR SS-RSRP threshold for event B2
b2-Threshold2EUTRAN		dBm	-98	Absolute E-UTRAN RSRP threshold for event B2
Hysteresis		dB	0	
TimeToTrigger		s	0	
Filter coefficient			0	L3 filtering is not used
DRX			OFF	Non-DRX test
Access Barring Information		-	Not sent	No additional delays in random access procedure
Time offset between cells			3 ms	Asynchronous cells
Gap pattern configuration Id			0	As specified in Table 9.1.2-1 started before T2 starts
T1		s	5	
T2		s	≤5	
T3		s	1	

Table A.11.2.1.7-3: Cell specific test parameters for SA inter-RAT E-UTRA handover (Cell 1)

Parameter	Unit	Configuration	Cell 1		
			T1	T2	T3
RF channel number		1, 2	1		
TDD Configuration		1, 2	TDDConf.1.1.CCA		
DL CCA probability for semi-static channel access (P_{CCA_DL})DL CCA probability P_{CCA_DL}		1, 2	0.9375		
DL CCA probability for for dynamic static channel access ($P_{CCA_DL_1}$)		1, 2	0.75		
DL CCA probability for for dynamic static channel access ($P_{CCA_DL_2}$)		1, 2	0.75		
UL CCA probability for semi-static channel access P_{CCA_UL}		1, 2	0.75		
UL CCA probability for dynamic static channel access P_{CCA_UL}		1, 2	0.87		
$BW_{channel}$		1, 2	40: $N_{RB,c}$ = 106 (TDD)		
PDSCH reference measurement channel		1, 2	SR.1.1 CCA		
CORESET reference channel		1, 2	CR.1.1 CCA		

Dedicated CORESET RMC configuration			1, 2	CCR.1.1 CCA		
TRS configuration			1, 2	TRS.1.2 TDD		
OCNG pattern[Note1]			1, 2	OP.1		
BWP	Initial DL BWP		1, 2	DLBWP.0.1		
	Dedicated DL BWP			DLBWP.1.1		
	Initial UL BWP			ULBWP.0.1		
	Dedicated UL BWP			ULBWP.1.1		
SMTC configuration			1, 2	SMTC.1		
DBT window configuration			1, 2	As defined in A.3.28.1		
SSB configuration			1, 2	SSB.1 CCA for semi-static channel access; SSB.2 CCA for dynamic channel access;		
b2-Threshold1		dBm	1, 2	-93		
EPRE ratio of PSS to SSS		dB	1, 2	0		
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						
EPRE ratio of PDCCH to PDCCH_DMRS						
EPRE ratio of PDSCH_DMRS to SSS						
EPRE ratio of PDSCH to PDSCH_DMRS						
EPRE ratio of OCNG DMRS to SSS						
EPRE ratio of OCNG to OCNG DMRS						
N_{oc}[Note2]		dBm/15 KHz	1, 2	-100	-104	-100
N_{oc}[Note2]		dBm/SCS	1, 2	-97	-101	-97
$\hat{E}_s/N_{oc}$		dB	1, 2	12	0	-4
$\hat{E}_s/I_{ot}$[Note3]		dB	1, 2	12	0	-4
SS-RSRP[Note3]		dBm/SCS	1, 2	-85	-101	-101
Io[Note3]		dBm/38.16 MHz	1, 2	-53.68	-66.9448	-64.49
Propagation condition			1, 2	AWGN		
Antenna Configuration and Correlation Matrix			1, 2	1x2 Low		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

Table A.11.2.1.7-4: Cell specific test parameters for SA inter-RAT E-UTRA handover (Cell 2)

Parameter	Unit	Configuration	Cell 2

			T1	T2	T3
RF channel number		1, 2	2		
Duplex mode		1	FDD		
		2	TDD		
TDD special subframe configuration[Note1]		2	6		
TDD uplink-downlink configuration[Note1]		2	1		
$BW_{channel}$	MHz	1, 2	10 MHz: $N_{RB,c}$ = 50		
PRACH Configuration[Note2]		1	4		
		2	53		
PDSCH parameters: DL Reference Measurement Channel[Note3]		1	10 MHz: R.3 FDD		
		2	10 MHz: R.0 TDD		
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note3]		1	10 MHz: R.6 FDD		
		2	10 MHz: R.6 TDD		
OCNG Patterns[Note3]		1	10 MHz: OP.10 FDD		
		2	10 MHz: OP.1 TDD		
PBCH_RA	dB	1, 2	0		
PBCH_RB					
PSS_RA					
SSS_RA					
PCFICH_RB					
PHICH_RA					
PHICH_RB					
PDCCH_RA					
PDCCH_RB					
PDSCH_RA					
PDSCH_RB					
OCNG_RA[Note4]					
OCNG_RB[Note4]					
N_{oc}[Note5]	dBm/15kHz	1, 2	-98		
$\hat{E}_s/N_{oc}$	dB	1, 2	-Infinity	8	78
$\hat{E}_s/I_{ot}$[Note6]	dB	1, 2	-Infinity	78	78
RSRP[Note6]	dBm/15kHz	1, 2	-Infinity	-90	-90
SCH_RP[Note6]	dBm/15kHz	1, 2	-Infinity	-90	-90
Io[Note6]	dBm/9MHz	1, 2	-67.21 +10log($N_{RB,c}$/100)	-58.57 +10log($N_{RB,c}$/100)	-58.57 +10log($N_{RB,c}$/100)
Propagation Condition		1, 2	AWGN		
Antenna Configuration and Correlation Matrix [Note7]		1, 2	1x2 Low		

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [23].

Note 3:	DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 4:	OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 5:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 6:	$\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 7:	Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].

A.11.2.1.7.2 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 85 ms from the beginning of time period T3.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 50 ms and is specified in clause 6.1.2.1.

$T_{interrupt}$ = 35 ms in the test; $T_{interrupt}$ is defined in clause 6.1.2.1.

This gives a total of 85 ms.

A.11.2.1.8 SA NR FR1 carrier under CCA - E-UTRAN handover with unknown target cell

A.11.2.1.8.1 Test Purpose and Environment

The purpose of this set of tests is to verify that the UE can make correct inter-RAT E-UTRAN handover when operating in standalone (SA) operation with PCell in FR1 carrier under CCA. This test shall verify the NR to E-UTRAN handover requirements for the case when the target E-UTRAN cell is unknown as specified in clause 6.1.2.1.

The test comprises of one NR carrier under CCA and one E-UTRA carrier. There are two cells and one cell on each carrier. Cell 1 is the NR PCell and Cell 2 is an inter-RAT E-UTRAN neighbour cell. The test consists of two successive time periods, with time durations of T1 and T2 respectively. At the start of time duration T1, the UE does not have any timing information of Cell 2. Starting T2, Cell 2 becomes detectable. No Gap pattern shall be configured.

A RRC message implying handover shall be sent to the UE during period T1. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE. The handover message shall contain Cell 2 as the target cell.

Supported test configurations are shown in table A.11.2.1.8-1. General test parameters are provided in Table A.11.2.1.8-2. Cell specific test parameters for Cell 1 and Cell 2 are provided in Tables A.11.2.1.8-3 and A.11.2.1.8-4 respectively.

Table A.11.2.1.8-1: Supported test configurations for SA inter-RAT E-UTRAN handover tests

Configuration	Description of a cell with CCA	Description of a cell without CCA
1	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
2	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations. Note 2: The UE supporting SA operation only on NR band(s) with shared spectrum access is required to be tested.		

Table A.11.2.1.8-2: General test parameters for SA inter-RAT E-UTRAN handover

Parameter		Unit	Value	Comment
NR RF Channel Number			1	1 NR carrier frequency is used in the test
LTE RF Channel Number			2	1 E-UTRAN carrier frequency is used in the test
Initial conditions	Active cell		Cell 1	NR cell on a carrier under CCA
	Neighbouring cell		Cell 2	E-UTRAN cell
Final condition	Active cell		Cell 2	
DL CCA model			As specified in clause A.3.20.2.1	
UL CCA model			As specified in clause A.3.20.2.2	
NR measurement quantity			SS-RSRP	
DRX			OFF	Non-DRX test
Access Barring Information		-	Not sent	No additional delays in random access procedure
Time offset between cells			3 ms	Asynchronous cells
T1		s	≤5	
T2		s	1	

Table A.11.2.1.8-3: Cell specific test parameters for SA inter-RAT E-UTRA handover (Cell 1)

Parameter		Unit	Configuration	Cell 1	
				T1	T2
RF channel number			1, 2	1	
DL CCA probability for semi-static channel access (P_{CCA_DL})DL CCA probability P_{CCA_DL}			1, 2	0.9375	
DL CCA probability for dynamic channel access ($P_{CCA_DL_1}$)			1, 2	0.75	
DL CCA probability for dynamic channel access ($P_{CCA_DL_2}$)			1, 2	0.75	
UL CCA probability for semi-static channel access P_{CCA_UL}			1, 2	0.75	
UL CCA probability for dynamic static channel access P_{CCA_UL}			1, 2	0.87	
TDD Configuration			1, 2	TDDConf.1.1.CCA	
$BW_{channel}$		MHz	1, 2	40: $N_{RB,c}$ = 106 (TDD)	
PDSCH reference measurement channel			1, 2	SR.1.1 CCA	
CORESET reference channel			1, 2	CR.1.1 CCA	
Dedicated CORESET RMC configuration			1, 2	CCR.1.1 CCA	
TRS configuration			1, 2	TRS.1.2 TDD	
OCNG pattern[Note1]			1, 2	OP.1	
BWP	Initial DL BWP		1, 2	DLBWP.0.1	
	Dedicated DL BWP			DLBWP.1.1	
	Initial UL BWP			ULBWP.0.1	
	Dedicated UL BWP			ULBWP.1.1	
SMTC configuration			1, 2	SMTC.1	
DBT window configuration			1, 2	As defined in A.3.28.1	
SSB configuration			1, 2	SSB.1 CCA for semi-static channel access;	

			SSB.2 CCA for dynamic channel access;	
EPRE ratio of PSS to SSS	dB	1, 2	0	
EPRE ratio of PBCH_DMRS to SSS				
EPRE ratio of PBCH to PBCH_DMRS				
EPRE ratio of PDCCH_DMRS to SSS				
EPRE ratio of PDCCH to PDCCH_DMRS				
EPRE ratio of PDSCH_DMRS to SSS				
EPRE ratio of PDSCH to PDSCH_DMRS				
EPRE ratio of OCNG DMRS to SSS				
EPRE ratio of OCNG to OCNG DMRS				
N_{oc}[Note2]	dBm/15 KHz	1, 2	-98	
N_{oc}[Note2]	dBm/SCS	1, 2	-95	
$\hat{E}_s/N_{oc}$	dB	1, 2	0	0
$\hat{E}_s/I_{ot}$[Note3]	dB	1, 2	0	0
SS-RSRP[Note3]	dBm/SCS	1, 2	-95	-95
Io[Note3]	dBm/38.16 MHz	1, 2	-60.94	-60.94
Propagation condition		1, 2	AWGN	
Antenna Configuration and Correlation Matrix		1, 2	1x2 Low	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.				

Table A.11.2.1.8-4: Cell specific test parameters for SA inter-RAT E-UTRA handover (Cell 2)

Parameter	Unit	Configuration	Cell 2	
			T1	T2
RF channel number		1, 2	2	
Duplex mode		1	FDD	
		2	TDD	
TDD special subframe configuration[Note1]		2	6	
TDD uplink-downlink configuration[Note1]		2	1	
$BW_{channel}$	MHz	1, 2	10 MHz: $N_{RB,c}$ = 50	
PRACH Configuration[Note2]		1	4	
		2	53	
PDSCH parameters: DL Reference Measurement Channel[Note3]		1	10 MHz: R.3 FDD	
		2	10 MHz: R.0 TDD	
		1	10 MHz: R.6 FDD	

PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note3]		2	10 MHz: R.6 TDD	
OCNG Patterns[Note3]		1	10 MHz: OP.10 FDD	
		2	10 MHz: OP.1 TDD	
PBCH_RA	dB	1, 2	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note4]				
OCNG_RB[Note4]				
N_{oc}[Note5]	dBm/15kHz	1, 2	-98	
$\hat{E}_s/N_{oc}$	dB	1, 2	-Infinity	7
$\hat{E}_s/I_{ot}$[Note6]	dB	1, 2	-Infinity	7
RSRP[Note6]	dBm/15kHz	1, 2	-Infinity	-91
SCH_RP[Note6]	dBm/15kHz	1, 2	-Infinity	-91
Io[Note6]	dBm/9MHz	1, 2	-70.22	-62.43
Propagation Condition		1, 2	AWGN	
Antenna Configuration and Correlation Matrix [Note7]		1, 2	1x2 Low	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [23].
Note 3: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 4: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 6: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 7: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].

A.11.2.1.8.2 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 165 ms from the beginning of time period T2.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 50 ms and is specified in clause 6.1.2.1.

$T_{interrupt}$ = 115 ms in the test; $T_{interrupt}$ is defined in clause 6.1.2.1.

This gives a total of 165 ms.

A.11.2.1.9 Handover with PSCell from NR SA to EN-DC with known target PSCell using CCA

A.11.2.1.9.1 Test Purpose and Environment

The purpose of this set of tests is to verify that the UE can make correct SA inter-RAT handover from NR to E-UTRAN with FR1 PSCell addition when operating in standalone (SA) operation with PCell in FR1, for the case where the PSCell is known to the UE at the time of addition and SMTC of target known PSCell is not present in *RRCConnectionReconfiguration*. This test shall verify delay requirements of inter-RAT handover from NR to E-UTRAN and FR1 PSCell carrier with CCA addition as specified in clause 6.1.5.

The test comprises of two NR cells and one E-UTRA cell. Cell 1 is the NR PCell, Cell 2 is an inter-RAT E-UTRAN neighbour cell and Cell 3 is the target NR PSCell, which is on CCA, on radio channel 1 in FR1, radio channel 2 in E-UTRAN and radio channel 3 in FR1 with CCA, respectively.

In this test, inter-RAT handover from NR to E-UTRAN and FR1 PSCell addition are performed in parallel processing. The test consists of successive time periods for inter-RAT handover with time durations of T1, T2 and T3 respectively, and successive time periods for FR1 PSCell addition with time durations of T1', T2', T3'and T4' respectively.

At the start of time duration T1, the UE does not have any timing information of Cell 2, and the UE is only monitoring Cell 1. During T1, only Cell1 is known to the UE.

Before the start of T2 or T2', the test system shall send measurement control information including measurement gap configuration and event-triggered reporting configuration with event B2 for neighbour Cell 2 and event B1 for Cell 3. Gap pattern configuration with id #0 as specified in Table 9.1.2-1 is configured before T2 or T2' begins.

Starting T2, Cell 2 becomes detectable and the UE is expected to detect and send a measurement report. A RRC message implying handover shall be sent to the UE during period T2 after the UE has reported Event B2. The start of T3 is the instant when the last TTI containing the RRC message implying handover is sent to the UE. The handover message shall contain Cell 2 as the target cell.

During T3, the UE shall carry out random access (i.e., transmit the PRACH) towards the Cell 2. Reception by the test system of the PRACH preamble defines the end of T3.

Starting T2', the Cell 3 (PSCell-to-be) on radio channel 3 becomes known to the UE at the time of addition. Therefore, during T2' the UE shall report Event B1. After receiving the Event B1, the test system shall send a RRC message to the UE to release the measurement gaps. The test system shall send a RRC message to the UE to add PSCell (Cell 3) on radio channel 3. The RRC message (to add PSCell) also includes a request for the UE to start periodic CSI reporting for the PSCell after the PSCell has been successfully added. The RRC message to add PSCell shall be sent to the UE during period T2', after the measurement gaps are released by the test system. The point in time at which the RRC message to add PSCell (Cell 3) is received at the UE antenna connector defines the start of period T3'.

During T3', the UE shall carry out random access (i.e., transmit the PRACH) towards the Cell 3. Reception by the test system of the PRACH preamble defines the start of period T4'.

During T4', the UE shall send periodic CSI reports in PSCell and the test system shall observe the periodic reporting of CSI for PSCell.

Supported test configurations are shown in table A.11.2.1.9.1-1. General test parameters are provided in Table A.11.2.1.9.1-2. Cell specific test parameters for NR Cell 1, E-UTRAN PCell Cell 2 are provided in Tables A.11.2.1.9.1-3, A.11.2.1.9.1-4 and A.11.2.1.xn-5 respectively. Table A.11.2.1.9.1-5 provides General test parameters for NR FR1 PSCell carrier with CCA addition, and Table A.11.2.1.9.1-6 provides Cell specific test parameters for PSCell addition of FR1 carrier under CCA.

Table A.11.2.1.9.1-1: Supported test configurations for SA inter-RAT E-UTRAN handover with FR1 PSCell addition tests

Config	Description	
	NR PCell and EUTRA PCell	NR PSCell on CCA
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD, LTE FDD,	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD, LTE FDD	
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD, LTE FDD	
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD, LTE TDD	
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD, LTE TDD	
6	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD, LTE TDD	
Note: The UE is only required to be tested in one of the supported test configurations depending on the UE capability		

Table A.11.2.1.9.1-2: General test parameters for SA inter-RAT E-UTRAN handover with FR1 PSCell addition

Parameter		Unit	Value	Comment
NR RF Channel Number			1, 3	2 NR carrier frequency is used in the test
LTE RF Channel Number			2	1 E-UTRAN carrier frequency is used in the test
Initial conditions	Active cell		Cell 1	NR cell
	Neighbouring cell		Cell 2, 3	E-UTRAN cell and NR cell in FR1
Final condition	Active Pcell		Cell 2	E-UTRAN cell
	Active PSCell		Cell 3	NR cell in FR1
NR measurement quantity			SS-RSRP	
E-UTRAN measurement quantity			RSRP	
Event B1	Hysteresis	dB	0	Hysteresis for evaluation of event B1.
	Threshold RSRP	dBm	-93	Actual RSRP threshold for event B1. Needs to take absolute accuracy tolerance in clause 9.1.11.1 into account plus margin.
	Time to Trigger	S	0	
Event B2	Threshold1	dBm	As specified in Table A.6.3.1.4-3	Absolute NR SS-RSRP threshold for event B2
	Threshold2EUTRAN	dBm	-98	Absolute E-UTRAN RSRP threshold for event B2
	Hysteresis	dB	0	
	TimeToTrigger	s	0	
Filter coefficient			0	L3 filtering is not used
DRX			OFF	Non-DRX test
Access Barring Information		-	Not sent	No additional delays in random access procedure
Time offset between cell 1 and cell 2			3 ms	Asynchronous cells
Measurement Gap pattern ID			0	As specified in Table 9.1.2-1
T1/T1'		s	1	During this time only Cell 1 is known to UE.

T2	s	≤5	During this time the UE shall identify Cell 2 and report event B2.
T3	s	1	During this time the UE handovers to Cell 2.
T2'	s	≤ 5	During this time the UE shall identify Cell 3 and report event B1.
T3'	s	≥ $T_{interrupt}$	During this time the UE adds the PSCell (Cell 3).
T4'	s	≤ 1	During this time the UE sends CSI reports for PSCell (Cell 3).

Table A.11.2.1.9.1-3: Cell specific test parameters for SA inter-RAT E-UTRA handover with FR1 PSCell addition (NR Cell 1)

Parameter		Unit	Configuration	Cell 1		
				T1	T2	T3
RF channel number			1, 2, 3, 4, 5, 6	1		
Duplex mode			1, 4	FDD		
			2, 3, 5, 6	TDD		
TDD Configuration			2, 5	TDDConf.1.1		
			3, 6	TDDConf.2.1		
$BW_{channel}$		MHz	1, 4	10: $N_{RB,c}$ = 52 (FDD)		
			2, 5	10: $N_{RB,c}$ = 52 (TDD)		
			3, 6	40: $N_{RB,c}$ = 106 (TDD)		
PDSCH reference measurement channel			1, 4	SR.1.1 FDD		
			2, 5	SR.1.1 TDD		
			3, 6	SR.2.1 TDD		
CORSET reference channel			1, 4	CR.1.1 FDD		
			2, 5	CR.1.1 TDD		
			3, 6	CR.2.1 TDD		
TRS configuration			1, 4	TRS.1.1 FDD		
			2, 5	TRS.1.1 TDD		
			3, 6	TRS.1.2 TDD		
OCNG pattern[Note1]			1, 2, 3, 4, 5, 6	OP.1		
BWP	Initial DL BWP		1, 2, 3, 4, 5, 6	DLBWP.0.1		
	Dedicated DL BWP			DLBWP.1.1		
	Initial UL BWP			ULBWP.0.1		
	Dedicated UL BWP			ULBWP.1.1		
SMTC configuration			1, 2, 3, 4, 5, 6	SMTC.1		
SSB configuration			1, 2, 4, 5	SSB.1 FR1		
			3, 6	SSB.2 FR1		
b2-Threshold1		dBm	1, 2, 4, 5	-96		
			3, 6	-93		
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4, 5, 6	0		
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						
EPRE ratio of PDCCH to PDCCH_DMRS						
EPRE ratio of PDSCH_DMRS to SSS						

EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS					
EPRE ratio of OCNG to OCNG DMRS					
N_{oc}[Note2]	dBm/15 KHz	1, 2, 3, 4, 5, 6	-100	-104	-100
N_{oc}[Note2]	dBm/SCS	1, 2, 4, 5	-100	-104	-100
		3, 6	-97	-101	-97
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	12	0	-4
$\hat{E}_s/I_{ot}$[Note3]	dB	1, 2, 3, 4, 5, 6	12	0	-4
SS-RSRP[Note3]	dBm/SCS	1, 2, 4, 5	-88	-104	-104
		3, 6	-85	-101	-101
Io[Note3]	dBm/9.36 MHz	1, 2, 4, 5	-59.78	-73.04	-70.59
	dBm/38.16 MHz	3, 6	-53.68	-66.9448	-64.49
Propagation condition		1, 2, 3, 4, 5, 6	AWGN		
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x2 Low		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.11.2.1.9.1-4: Cell specific test parameters for SA inter-RAT E-UTRA handover with FR1 PSCell addition (E-UTRA Cell 2)

Parameter	Unit	Configuration	Cell 2		
			T1	T2	T3
RF channel number		1, 2, 3, 4, 5, 6	2		
Duplex mode		1, 2, 3	FDD		
		4, 5, 6	TDD		
TDD special subframe configuration[Note1]		4, 5, 6	6		
TDD uplink-downlink configuration[Note1]		4, 5, 6	1		
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100		
PRACH Configuration[Note2]		1, 2, 3	4		
		4, 5, 6	53		
PDSCH parameters: DL Reference Measurement Channel[Note3]		1, 2, 3	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD		
		4, 5, 6	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD		
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note3]		1, 2, 3	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD		
		4, 5, 6	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD		

OCNG Patterns[Note3]		1, 2, 3	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD		
		4, 5, 6	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD		
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0		
PBCH_RB					
PSS_RA					
SSS_RA					
PCFICH_RB					
PHICH_RA					
PHICH_RB					
PDCCH_RA					
PDCCH_RB					
PDSCH_RA					
PDSCH_RB					
OCNG_RA[Note4]					
OCNG_RB[Note4]					
N_{oc}[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6	-98		
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	-Infinity	8	78
$\hat{E}_s/I_{ot}$[Note6]	dB	1, 2, 3, 4, 5, 6	-Infinity	78	78
RSRP[Note6]	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-90	-90
SCH_RP[Note6]	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-90	-90
Io[Note6]	dBm/9MHz	1, 2, 3, 4, 5, 6	-67.21 +10log($N_{RB,c}$/100)	-58.57 +10log($N_{RB,c}$/100)	-58.57 +10log($N_{RB,c}$/100)
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN		
Antenna Configuration and Correlation Matrix Note7		1, 2, 3, 4, 5, 6	1x2 Low		

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [23].
Note 3: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 4: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 6: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 7: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].

Table A.11.2.1.9.1-5: General test parameters for NR FR1 PSCell carrier with CCA addition

Parameter		Unit	Value	Comment
Initial condition	Neighbouring cell		Cell 3	On the carrier under CCA
Final condition	Active cell		Cell 3	On the carrier under CCA
DL CCA model	Dynamic channel access[Note 1, 3]		As specified in clause A.3.20.2.1	
	Semi-static channel access [Note 2, 3]			
UL CCA model	Dynamic channel access [Note 1, 3]		As specified in clause A.3.20.2.2	
	Semi-static channel access [Note 2,3]			
A3-Offset		dB	0	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.

Time offset between cells		3 μs	Synchronous cells
T304	ms	500	
L_{CCA_DL}		5	
W_{CCA_DL}	ms	T304	
L_{CCA_UL}		5	
W_{CCA_UL}	ms	T304	
T1'	s	5	
T2'	s	≤ 5	
T3'	s	≥ $T_{interrupt}$	$T_{interrupt}$ is defined in clause 6.1B.1.2
T4'	s	≤ 1	
Note 1: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy. Note 2: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.			

Table A.11.2.1.9.1-6: Cell specific test parameters for PSCell addition of FR1 carrier under CCA

Parameter		Unit	Cell 3			
			T1'	T2'	T3'	T4'
NR RF Channel Number			1			
P_{CCA_DL} for dynamic channel access Note 4,6		-	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75			
P_{CCA_DL} for semi-static channel access Note 5,6		-	P_{CCA_DL}=0.9375			
P_{CCA_UL} for dynamic channel access Note 4,6		-	0.75			
P_{CCA_UL} for semi-static channel access Note 5,6		-	0.87			
TDD configuration	Config 1, 2, 3, 4, 5, 6		TDDConf.1.1 CCA			
$BW_{channel}$	Config 1, 2, 3, 4, 5, 6		40: $N_{RB,c}$ = 106			
BWP BW	Config 1, 2, 3, 4, 5, 6		40: $N_{RB,c}$ = 106			
DRX Cycle		ms	Not Applicable			
PDSCH Reference	Config 1, 2, 3, 4, 5, 6		SR.1.1 CCA			
CORESET Reference Channel	Config 1, 2, 3, 4, 5, 6		CR.1.1 CCA			
Dedicated CORESET RMC configuration	Config 1, 2, 3, 4, 5, 6		CCR.1.1 CCA			
TRS configuration	Config 1, 2, 3, 4, 5, 6		TRS.1.1 TDD			
OCNG Patterns			OP.1			
SMTC Configuration			SMTC.1			
DBT window configuration	Config 1, 2, 3, 4, 5, 6		DBT.1			
SSB configuration for semi-static channel access Note 4, 6	Config 1, 2, 3, 4, 5, 6		SSB.1 CCA			
SSB configuration for dynamic channel access Note 5, 6	Config 1, 2, 3, 4, 5, 6		SSB.2 CCA			
ssb-PositionQCL	Config 1, 2, 3, 4, 5, 6		1			
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 3, 4, 5, 6	kHz	30 kHz			
PUCCH/PUSCH subcarrier spacing	Config 1, 2, 3, 4, 5, 6	kHz	30 kHz			

PRACH configuration			FR1 PRACH configuration 1 under CCA			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-98			
N_{oc} Note2	Config 1, 2, 3, 4, 5, 6	dBm/SCS	-95			
$\hat{E}_s/I_{ot}$		dB	-∞	2.36	2.36	2.36
$\hat{E}_s/N_{oc}$		dB	-∞	11	11	11
SSB_RP	Config 1, 2, 3, 4, 5, 6	dBm/SCS	-∞	-84	-84	-84
Io Note3	Config 1, 2, 3, 4, 5, 6	dBm/ 38.16MHz	-55.31	-50.96	-50.96	-50.96
Propagation condition		-	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 5: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 6: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

A.11.2.1.9.2 Test Requirements

In this test, the UE shall start to transmit the PRACH to E-UTRA Cell 2 less than 55 ms Note1 from the beginning of time period T3.

The above test requirements shall be fulfilled in order of T1, T2, T3 for the observed inter-RAT handover delay from NR to E-UTRAN to be counted as correct, and in order of T1, T2′, T3′, T4′ for the observed PSCell addition delay to be counted as correct.

The rate of correct handovers and correct PSCell addition delay during repeated tests shall be at least 90%.

NOTE1: The handover delay can be expressed as specified in clause 6.1.5.2:

$D_{HOwithPSCell_PCell}$ = RRC procedure delay + $T_{interrupt}$,

Where RRC procedure delay = 50 ms, and

$T_{interrupt} = T_{search_HO} + T_{IU} + T_{processing}$ is defined in clause 6.1.5.2.1, where

T_{search} = 0 ms

T_{IU} = 10 ms,

$T_{processing}$ = 25ms

$D_{HOwithPSCell_PCell}$ is equal to 85ms.

The UE shall transmit the PRACH to PSCell no later than $D_{HOwithPSCell_PSCell}$ from the start of T3'. The UE shall send at least one CSI report for PSCell with non-zero CQI index during T4'. The UE shall periodically send CSI reports for PSCell after the UE has sent first CQI report with non-zero CQI index during T4.

The PSCell addition delay can be expressed as follows as specified in clause 6.1.5.5.3:

$D_{HOwithPSCell_PSCell} = T_{RRC_delay} + T_{processing} + T_{search_PCell} + T_{search_PSCell} + T_{\Delta} + T_{IU_PSCell}$ + 2 ms

Where:

T_{RRC_delay} = 20 ms

$T_{processing}$ = 25ms

T_{search_PCell} = 0

T_{search_PSCell} = $0T_{\Delta}$ = (1+ L_2) *20 ms.

T_{IU_PSCell} = (1+ L_3) *10 + 10 ms

L_2 is the number of SMTC occasions not available at the UE during the time tracking period where $L_2 \leq L_{CCA_DL}$, and L_3 is the number of consecutive SSB to PRACH occasion association periods during which no PRACH occasion is available for PRACH transmission due to UL CCA failure, where $L_3 \leq L_{CCA_UL}$. L_3 = 0 for Type 2C UL channel access procedure as defined in TS 37.213 [33]. The interruption time considering the potential extensions caused by L_1, L_2, L_3 and by the UL CCA failure detection/recovery mechanism is limited by the T304 timer. The UE behaviour at the T304 timer expiry is detailed in TS 38.331 [2]. Test equipment should make sure that L_{CCA_DL} and L_{CCA_UL} are not exceeded during a test by monitoring the number of CCA failures and preventing additional CCA failures from happening after L_{CCA_DL} or L_{CCA_UL} is reached.

The rate of correct PSCell addition observed during repeated tests shall be at least 90%.

A.11.2.2 RRC connection mobility control

A.11.2.2.1 RRC re-establishment

A.11.2.2.1.1 Intra-frequency RRC Re-establishment with CCA in FR1

A.11.2.2.1.1.1 Test Purpose and Environment

The purpose is to verify that the NR intra-frequency RRC re-establishment delay with CCA in FR1 with known target cell is within the specified limits. These tests will verify the requirements in clause 6.2.1A.

The test parameters are given in table A.11.2.2.1.1.1-1, table A.11.2.2.1.1.1-2 and table A.11.2.2.1.1.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell with CCA, is deactivated. The time period T3 starts after the occurrence of the radio link failure.

Table A.11.2.2.1.1.1-1: Supported test configurations

Configuration	Description
1	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Table A.11.2.2.1.1.1-2: General test parameters for NR intra-frequency RRC Re-establishment test case with CCA

Parameter		Unit	Value	Comment
Initial Condition	Active cell	-	Cell1	Cell 1 is with CCA.
	Neighbour cells	-	Cell2	Cell 2 is with CCA.
Final condition	Active cell	-	Cell2	
RF Channel Number		-	1	
DL CCA model	Dynamic channel access Note 1, 3	-	As specified in clause A.3.26.2.1	
	Semi-static channel access Note 2, 3	-		
UL CCA model	Dynamic channel access Note 1, 3	-	As specified in clause A.3.26.2.2	
	Semi-static channel access Note 2,3	-		
Time offset between cells		-	3 μs	Synchronous cells
N310		-	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1	Minimum consecutive in-sync indications from lower layers
T310		ms	0	Radio link failure timer; T310 is disabled
T311		ms	3000	RRC re-establishment timer
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
SSB configuration	Dynamic channel access Note 1, 3	-	SSB.2 CCA	Table A.3.10A.1.2-1
	Semi-static channel access Note 2, 3	-	SSB.1 CCA	Table A.3.10A.1.1-1
DBT window configuration		-	DBT.1	Table A.3.28.1-1
SMTC configuration		-	SMTC pattern 1	
DRX cycle length		s	OFF	
PRACH configuration		-	FR1 PRACH configuration 1 under CCA	Table A.3.8A.2.1-1
T1		s	5	
T2		ms	480	Time for the UE to detect RLF
T3		s	2	

NOTE 1: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy.
NOTE 2: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy.
NOTE 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

Table A.11.2.2.1.1.1-3: Cell specific test parameters for NR intra-frequency RRC Re-establishment test case with CCA

Parameter	Unit	Cell 1			Cell 2		
		T1	T2	T3	T1	T2	T3
TDD configuration	-	TDDConf.1.1 CCA			TDDConf.1.1 CCA		
DL CCA probability P_{CCA_DL} for dynamic channel access Note 4,6	-	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75			$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		

DL CCA probability P_{CCA_DL} for semi-static channel access Note 5,6	-	P_{CCA_DL}=0.9375			P_{CCA_DL}=0.9375		
UL CCA probability P_{CCA_UL}	-	1			1		
PDSCH RMC configuration		SR.1.1 CCA			SR.1.1 CCA		
RMSI CORESET RMC configuration		CR.1.1 CCA			CR.1.1 CCA		
Dedicated CORESET RMC configuration		CCR.1.1 CCA			CCR.1.1 CCA		
OCNG Pattern		OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
TRS configuration		TRS.1.2 TDD			N/A		
Initial DL BWP configuration		DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		ULBWP.0.1			ULBWP.0.1		
Active DL BWP confgiuration		DLBWP.1.1	N/A	N/A	N/A	N/A	DLBWP.1.1
Active UL BWP configuration		ULBWP.1.1	N/A	N/A	N/A	N/A	ULBWP.1.1
RLM-RS		SSB			SSB		
$\hat{E}_s/I_{ot}$	dB	1.54	-infinity	-infinity	-3.79	4	4
N_{oc} Note2	dBm/SCS	-95					
N_{oc} Note2	dBm/15 kHz	-98					
$\hat{E}_s/N_{oc}$	dB	7	-infinity	-infinity	4	4	4
SS-RSRP Note3	dBm/SCS	-88	-infinity	-infinity	-91	-91	-91
Io	dBm/38.16 MHz	-54.65	-58.50	-58.50	-54.65	-58.50	-58.50
Propagation Condition		AWGN					

NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy.
NOTE 5: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy.
NOTE 6: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

A.11.2.2.1.1.2 Test Requirements

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to a known NR intra frequency cell with CCA shall be less than 1350 + MAX (200, $(5+K_1)$ x 20) ms.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{re-establish_delay_CCA} = T_{UE_re-establish_delay_CCA} + T_{UL_grant}$$

Where:

T_{UL_grant} = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence T_{UL_grant} is not used.

$$T_{UE_re-establish_delay_CCA} = 50 \text{ ms} + T_{identify_intra_NR_CCA} + \sum_{i=1}^{N_{freq}-1} T_{identify_inter_NR_CCA,i} + T_{SI-NR_CCA} + T_{PRACH_CCA}$$

Where

N_{freq} = 1

$T_{identify_intra_NR_CCA}$ = MAX (200 ms, (5+K_1) x T_{SMTC}), where

K_1 is the number of SMTC occasions not available at the UE due to DL CCA failures during RRC re-establishment period on the carrier with CCA.

T_{SMTC} = 20 ms is the SMTC periodicity.

$T_{identify_inter_NR_CCA}$ = 0 ms

T_{SI-NR_CCA} = 1280 ms; it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target intra-frequency NR cell.

T_{PRACH_CCA} = $T_{SSB,RO}$ + 10 ms, where:

- $T_{SSB,RO}$ is the SSB to PRACH occasion association period as defined in Table 8.1-1 of TS 38.213 [39], which is $T_{SSB,RO}$=10 ms for FR1 PRACH configuration 1 under CCA.

This gives a total of 1350 + MAX (200, (5+K_1) x 20) ms.

A.11.2.2.1.2 Inter-frequency RRC Re-establishment with CCA in FR1

A.11.2.2.1.2.1 Test Purpose and Environment

The purpose is to verify that the NR inter-frequency RRC re-establishment delay with CCA in FR1 without known target cell is within the specified limits. These tests will verify the requirements in clause 6.2.1A.

The test parameters are given in table A.11.2.2.1.2.1-1, table A.11.2.2.1.2.1-2 and table A.11.2.2.1.2.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell with CCA, becomes inactive. The time period T3 starts after the occurrence of the radio link failure. During T1, the UE shall be configured with the carrier frequency of cell 2 (with RF Channel Number #2) to ensure that the UE has the context of the carrier frequency of cell 2 by the end of T1.

Table A.11.2.2.1.2.1-1: Supported test configurations

Configuration	Description
1	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Table A.11.2.2.1.2.1-2: General test parameters for NR inter-frequency RRC Re-establishment test case in FR1

Parameter	Unit	Value	Comment

Initial Condition	Active cell	-	Cell1	Cell 1 is with CCA.
	Neighbour cells	-	Cell2	Cell 2 is with CCA.
Final condition	Active cell	-	Cell2	
RF Channel Number		-	1	
DL CCA model	Dynamic channel access Note 1, 3	-	As specified in clause A.3.20.2.1	
	Semi-static channel access Note 2, 3	-		
UL CCA model	Dynamic channel access Note 1, 3	-	As specified in clause A.3.20.2.2	
	Semi-static channel access Note 2, 3	-		
Time offset between cells		-	3 μs	Synchronous cells
N310		-	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1	Minimum consecutive in-sync indications from lower layers
T310		ms	0	Radio link failure timer; T310 is disabled
T311		ms	3000	RRC re-establishment timer
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
SSB configuration	Dynamic channel access Note 1, 3	-	SSB.2 CCA	Table A.3.10A.1.2-1
	Semi-static channel access Note 2, 3	-	SSB.1 CCA	Table A.3.10A.1.1-1
DBT window configuration		-	[DBT.1]	Table A.3.28.1-1
SMTC configuration		-	SMTC pattern 1	
DRX cycle length		s	OFF	
PRACH configuration		-	[TBD]	
T1		s	[5]	
T2		ms	[200]	Time for the UE to detect RLF
T3		s	[2]	

NOTE 1: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy.
NOTE 2: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy.
NOTE 3: For a UE supporting both semi-static and dynamic cannel access, the UE can be tested under dynamic channel occupancy only.

Table A.11.2.2.1.2.1-3: Cell specific test parameters for NR inter-frequency RRC Re-establishment test case in FR1

Parameter	Unit	Cell 1			Cell 2		
		T1	T2	T3	T1	T2	T3
TDD configuration		TDDConf.1.1 CCA			TDDConf.1.1 CCA		
DL CCA probability P_{CCA_DL} for dynamic channel access Note 4,6	-	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75			$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		
DL CCA probability P_{CCA_DL} for semi-static channel access Note 5,6	-	P_{CCA_DL}=0.9375			P_{CCA_DL}=0.9375		
UL CCA probability P_{CCA_UL}	-	1			1		
PDSCH RMC configuration		SR.1.1 CCA			SR.1.1 CCA		

RMSI CORESET RMC configuration		CR.1.1 CCA			CR.1.1 CCA		
Dedicated CORESET RMC configuration		CCR.1.1 CCA			CCR.1.1 CCA		
OCNG Pattern		OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
TRS configuration		TRS.1.2 TDD			N/A		
Initial DL BWP configuration		DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		ULBWP.0.1			ULBWP.0.1		
Active DL BWP confgiuration		DLBWP.1.1	N/A	N/A	N/A	N/A	DLBWP.1.1
Active UL BWP configuration		ULBWP.1.1	N/A	N/A	N/A	N/A	ULBWP.1.1
RLM-RS		SSB			SSB		
$\hat{E}_s/I_{ot}$	dB	1.54	-infinity	-infinity	-3.79	4	4
N_{oc} Note2	dBm/SCS	[-101]					
N_{oc} Note2	dBm/15 kHz	[-104]					
$\hat{E}_s/N_{oc}$	dB	7	-infinity	-infinity	4	4	4
SS-RSRP Note3	dBm/SCS	-88	-infinity	-infinity	-91	-91	-91
Io	dBm/9.36 MHz	-54.65	-58.50	-58.50	-54.65	-58.50	-58.50
Propagation Condition		AWGN					

NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy.
NOTE 5: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy.
NOTE 6: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

A.11.2.2.1.2.2 Test Requirements

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to an unknown NR inter frequency cell shall be less than $T_{re-establish_{delay_{CCA}}}$.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{re-establish_{delay_{CCA}}} = T_{UE_{re-establish_{delay_{CCA}}}} + T_{UL_{grant}}$$

Where:

T_{UL_grant} = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence T_{UL_grant} is not used.

$$T_{UE_re-establish_delay_CCA} = 50\text{ ms} + T_{identify_intra_NR_CCA} + \sum_{i=1}^{N_{freq}-1} T_{identify_inter_NR_CCA,i} + T_{SI-NR_CCA} + T_{PRACH_CCA}$$

Where

$T_{identify_intra_NR_CCA}$: 0 ms

$T_{identify_inter_NR_CCA,i}$: MAX (200 ms, ([6]+K2,i) x TSMTC, i),

where

K2,i is the number of SMTC not available at the UE during RRC re-establishment period on the "i" th carrier with CCA

$T_{SMTC,i}$: It is the periodicity of the SMTC occasion configured for the inter-frequency carrier *i*.

N_{freq} = 2

T_{SI-NR_CCA} = 1280 ms; it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target inter-frequency NR cell.

T_{PRACH_CCA} = (1+ K_3)*$T_{SSB,RO}$ + 10 ms, where:

- $T_{SSB,RO}$ is the SSB to PRACH occasion association period as defined in Table 8.1-1 of TS 38.213 [3].

[- K_3 is the number of consecutive SSB to PRACH occasion association periods during which no PRACH occasion is available for PRACH transmission due to UL CCA failure. K_3 = 0 for Type 2C UL channel access procedure as defined in TS 37.213 [33].]

This gives a total of $T_{re-establish_{delay_{CCA}}}$ = 50 + MAX (200 ms, ([6]+K2,1) x TSMTC, 1) + 1280 + (1+ K_3)*$T_{SSB,RO}$ + 10 ms.

A.11.2.2.1.3 Intra-frequency RRC Re-establishment with CCA in FR1 without serving cell timing

A.11.2.2.1.3.1 Test Purpose and Environment

The purpose is to verify that the NR intra-frequency RRC re-establishment delay with CCA in FR1 without serving cell timing is within the specified limits. These tests will verify the requirements in clause 6.2.1A.

The test parameters are given in table A.11.2.2.1.3.1-1, table A.11.2.2.1.3.1-2 and table A.11.2.2.1.3.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell with CCA, is deactivated. The time period T3 starts after the occurrence of the radio link failure.

Table A.11.2.2.1.3.1-1: Supported test configurations

Configuration	Description
1	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Table A.11.2.2.1.3.1-2: General test parameters for NR intra-frequency RRC Re-establishment test case in FR1

Parameter	Unit	Value	Comment

Initial Condition	Active cell	-	Cell1	Cell 1 is with CCA.
	Neighbour cells	-	Cell2	Cell 2 is with CCA.
Final condition	Active cell	-	Cell2	
RF Channel Number		-	1	
DL CCA model	Dynamic channel access Note 1,3	-	As specified in clause A.3.26.2.1	
	Semi-static channel access Note 2,3	-		
UL CCA model	Dynamic channel access Note 1,3	-	As specified in clause A.3.26.2.2	
	Semi-static channel access Note 2,3	-		
Time offset between cells		-	3 μs	Synchronous cells
N310		-	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1	Minimum consecutive in-sync indications from lower layers
T310		ms	0	Radio link failure timer; T310 is disabled
T311		ms	3000	RRC re-establishment timer
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
SSB configuration	Dynamic channel access Note 1, 3	-	SSB.2 CCA	Table A.3.10A.1.2-1
	Semi-static channel access Note 2, 3	-	SSB.1 CCA	Table A.3.10A.1.1-1
DBT window configuration		-	DBT.1	Table A.3.28.1-1
SMTC configuration		-	SMTC pattern 1	
DRX cycle length		s	OFF	
PRACH configuration		-	FR1 PRACH configuration 1	Table A.3.8A.2.1-1
T1		s	5	
T2		ms	6	Time for the UE to detect RLF
T3		s	3	

NOTE 1: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy.
NOTE 2: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy.
NOTE 3: For a UE supporting both semi-static and dynamic cannel access, the UE can be tested under dynamic channel occupancy only.

Table A.11.2.2.1.3.1-3: Cell specific test parameters for NR intra-frequency RRC Re-establishment test case in FR1

Parameter	Unit	Cell 1			Cell 2		
		T1	T2	T3	T1	T2	T3
TDD configuration		TDDConf.1.1 CCA			TDDConf.1.1 CCA		
DL CCA probability P_{CCA_DL} for dynamic channel access Note 4,6	-	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75			$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		
DL CCA probability P_{CCA_DL} for semi-static channel access Note 5,6	-	P_{CCA_DL}=0.9375			P_{CCA_DL}=0.9375		
UL CCA probability P_{CCA_UL}	-	1			1		
PDSCH RMC configuration		SR.1.1 CCA			SR.1.1 CCA		

RMSI CORESET RMC configuration		CR.1.1 CCA			CR.1.1 CCA		
Dedicated CORESET RMC configuration		CCR.1.1 CCA			CCR.1.1 CCA		
OCNG Pattern		OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
TRS configuration		TRS.1.2 TDD			N/A		
Initial DL BWP configuration		DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		ULBWP.0.1			ULBWP.0.1		
Active DL BWP confgiuration		DLBWP.1.1	N/A	N/A	N/A	N/A	DLBWP.1.1
Active UL BWP configuration		ULBWP.1.1	N/A	N/A	N/A	N/A	ULBWP.1.1
RLM-RS		SSB			SSB		
$\hat{E}_s/I_{ot}$	dB	4	-infinity	-infinity	-infinity	-infinity	4
N_{oc} Note2	dBm/SCS	-95					
N_{oc} Note2	dBm/15 kHz	-98					
$\hat{E}_s/N_{oc}$	dB	7	-infinity	-infinity	-infinity	-infinity	4
SS-RSRP Note3	dBm/SCS	-91	-infinity	-infinity	-infinity	-infinity	-91
Io	dBm/38.16 MHz	-58.50	-63.94	-63.94	-63.94	-63.94	-58.50
Propagation Condition		AWGN					

NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy.
NOTE 5: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy.
NOTE 6: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

A.11.2.2.1.3.2 Test Requirements

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to an unknown NR intra frequency cell without serving cell timing shall be less than 1350 + MAX (800 ms, (10+ K_1) x 20) ms.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{re-establish_delay_CCA} = T_{UE_re-establish_delay_CCA} + T_{UL_grant}$$

Where:

T_{UL_grant} = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence T_{UL_grant} is not used.

$$T_{UE_re-establish_delay_CCA} = 50\ \text{ms} + T_{identify_intra_NR_CCA} + \sum_{i=1}^{N_{freq}-1} T_{identify_inter_NR_CCA,i} + T_{SI-NR_CCA} + T_{PRACH_CCA}$$

Where,

$N_{freq} = 1$

$T_{identify_intra_NR}$ = MAX (800 ms, (10+ K_1) x T_{SMTC}), where

K_1 is the number of SMTC occasions not available at the UE due to DL CCA failures during RRC re-establishment period on the carrier with CCA.

T_{SMTC} is the SMTC periodicity which is 20ms.

$T_{identify_inter_NR_CCA}$ = 0 ms

T_{SI-NR_CCA} = 1280 ms; it is the time required for receiving all the relevant system information as defined in TS 38.331 [2] for the target intra-frequency NR cell.

T_{PRACH_CCA} = (1+ K_3)*$T_{SSB,RO}$ + 10 ms, where:

- $T_{SSB,RO}$ is the SSB to PRACH occasion association period as defined in Table 8.1-1 of TS 38.213 [39]. It is 10 ms for FR1 PRACH configuration 1 under CCA.
- K_3 = 0.

This gives total $T_{UE_re-establish_delay_CCA}$ = 1350 + MAX (800 ms, (10+ K_1) x 20) ms.

A.11.2.2.1.4 Inter-frequency RRC Re-establishment from NR FR1 carrier without CCA to NR FR1 carrier under CCA

A.11.2.2.1.4.1 Test Purpose and Environment

The purpose is to verify that the NR inter-frequency RRC re-establishment delay requirement for RRC re-establishment from NR FR1 carrier without CCA to NR FR1 inter-frequency carrier under CCA with unknown target cell. These tests will verify the requirements in clause 6.2.1A.

The test parameters are given in table A.11.2.2.1.4.1-1, table A.11.2.2.1.4.1-2 and table A.11.2.2.1.4.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, becomes inactive. The time period T3 starts after the occurrence of the radio link failure. During T1, the UE shall be configured with the carrier frequency of cell 2 (with RF Channel Number #2) to ensure that the UE has the context of the carrier frequency of cell 2 by the end of T1.

Table A.11.2.2.1.4.1-1: Supported test configurations inter-frequency RRC re-establishment from NR FR1 without under CCA to NR FR1 inter-frequency carrier under CCA

Configuration	Source cell without CCA	Target cell with CCA
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD	30 kHz SSB SCS, 40 MHz bandwidth, TDD
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD	30 kHz SSB SCS, 40 MHz bandwidth, TDD
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD	30 kHz SSB SCS, 40 MHz bandwidth, TDD
Note: The UE is only required to be tested in one of the supported test configurations		

Table A.11.2.2.1.4.1-2: General test parameters for NR inter-frequency RRC Re-establishment test case from NR FR1 carrier without CCA to NR FR1 inter-frequency carrier under CCA

Parameter		Unit	Value	Comment
Initial condition	Active cell		Cell1	
	Neighbour cells		Cell2	
Final condition	Active cell		Cell2	
RF Channel Number			1, 2	
Time offset between cells			3 μs	Synchronous cells
DL CCA model	Dynamic channel access Note 1,3	-	As specified in clause A.3.26.2.1	
	Semi-static channel access Note 2,3	-		
UL CCA model	Dynamic channel access Note 1,3	-	As specified in clause A.3.26.2.2	
	Semi-static channel access Note 2,3	-		
N310		-	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1	Minimum consecutive in-sync indications from lower layers
T310		ms	0	Radio link failure timer; T310 is disabled
T311		ms	5000	RRC re-establishment timer
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
DRX cycle length		s	OFF	
PRACH configuration			FR1 PRACH configuration 1	Table A.3.8A.2.1-1
T1		s	5	
T2		ms	480	Time for the UE to detect RLF
T3		s	≥ $T_{UE_re\text{-}establish_delay_CCA}$	As defined in clause 6.2.1A
NOTE 1: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy. NOTE 2: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy. NOTE 3: For a UE supporting both semi-static and dynamic cannel access, the UE can be tested under dynamic channel occupancy only.				

Table A.11.2.2.1.4.1-3: Cell specific test parameters for NR inter-frequency RRC Re-establishment test case from NR FR1 carrier without CCA to NR FR1 inter-frequency carrier under CCA

Parameter	Test config	Unit	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration	1		N/A			TDDConf.1.1.CCA		
	2		TDDConf.1.1			TDDConf.1.1.CCA		
	3		TDDConf.2.1			TDDConf.1.1.CCA		
PDSCH RMC configuration	1		SR.1.1 FDD			SR.1.1 CCA		
	2		SR.1.1 TDD			SR.1.1 CCA		
	3		SR.2.1 TDD			SR.1.1 CCA		
RMSI CORESET RMC configuration	1		CR.1.1 FDD			CR.1.1 CCA		
	2		CR.1.1 TDD			CR.1.1 CCA		
	3		CR.2.1 TDD			CR.1.1 CCA		
Dedicated CORESET RMC configuration	1		CCR.1.1 FDD			CCR.1.1 CCA		
	2		CCR.1.1 TDD			CCR.1.1 CCA		
	3		CCR.2.1 TDD			CCR.1.1 CCA		
OCNG Pattern	1		OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
TRS configuration	1		TRS.1.1 FDD			TRS.1.2 TDD		

		2		TRS.1.1 TDD			TRS.1.2 TDD		
		3		TRS.1.2 TDD			TRS.1.2 TDD		
SMTC configuration		1,2,3		SMTC.1			SMTC.1		
SSB configuration	Semi- static channel acces	1,2		SSB.1 FR1			SSB.1 CCA		
	Semi- static channel acces	3		SSB.2 FR1			SSB.1 CCA		
	Dymamic channel acces	1,2		SSB.1 FR1			SSB.2 CCA		
	Dymamic channel acces	3		SSB.2 FR1			SSB.2 CCA		
Initial DL BWP configuration		1,2,3		DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1,2,3		ULBWP.0.1			ULBWP.0.1		
Active DL BWP confgiuration		1,2,3		DLBWP.1.1	N/A	N/A	N/A	N/A	DLBWP.1.1
Active UL BWP configuration		1,2,3		ULBWP.1.1	N/A	N/A	N/A	N/A	ULBWP.1.1
DL CCA probability for semi-static channel access (P_{CCA_DL})		1,2,3		N/A	N/A	N/A	1	1	0.9375
DL CCA probability for for dynamic static channel access ($P_{CCA_DL_1}$)		1,2,3		N/A	N/A	N/A	1	1	0.75
DL CCA probability for for dynamic static channel access ($P_{CCA_DL_2}$)		1,2,3		N/A	N/A	N/A	1	1	0.75
UL CCA probability (P_{CCA_UL})		1,2,3		N/A	N/A	N/A	1	1	1
RLM-RS		1,2,3		SSB			SSB		
$\hat{E}_s/I_{ot}$		1,2,3	dB	4	-infinity	-infinity	-infinity	-infinity	7
N_{oc} Note2		1,2,3	dBm/15 KHz	-98					
N_{oc} Note2		1,2	dBm/SCS	-98					
		3		-95					
$\hat{E}_s/N_{oc}$		1,2,3	dB	4	-infinity	-infinity	-infinity	-infinity	7
SS-RSRP Note3		1, 2	dBm/SCS	-94	-infinity	-infinity	-infinity	-infinity	-91
		3		-91	-infinity	-infinity	-infinity	-infinity	-88
Io		1,2	dBm/9.36 MHz	-64.59	-70. 05	-70. 05	-70. 05	-70.05	-62.26
		3	dBm/38.16 MHz	-58.50	-63.94	-63.94	-63.94	-63.94	-56.15
Propagation Condition		1,2,3		AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Parameters P_{CCA_DL}, $P_{CCA_DL_1}$, $P_{CCA_DL_2}$ and P_{CCA_UL} are defined in clause A.3.20.2.
Note 5: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

A.11.2.2.1.4.2 Test Requirements

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to an unknown NR inter frequency cell shall be less $T_{UE_re-establish_delay_CCA}$.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{re-establish_delay_CCA} = T_{UE_re-establish_delay_CCA} + T_{UL_grant}$$

Where:

T_{UL_grant} = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence T_{UL_grant} is not used.

$$T_{UE_re-establish_delay_CCA} = 50 \text{ ms} + T_{identify_intra_NR_CCA} + \sum_{i=1}^{N_{freq}-1} T_{identify_inter_NR_CCA,i} + T_{SI-NR_CCA} + T_{PRACH_CCA}$$

N_{freq} = 2

$T_{identify_intra_NR_CCA}$ = MAX (800 ms, (10+ K_1) x 20) ms

$T_{identify_inter_NR_CCA}$ = MAX (800 ms, ([13]+$K_{2,2}$) x 20) ms

T_{SI} = 1280 ms; it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target inter-frequency NR cell.

T_{PRACH_CCA} = It is the delay uncertainty in acquiring the first available PRACH occasion in the target NR cell. T_{PRACH_CCA} = (1+ K_3)*$T_{SSB,RO}$ + 10 ms; where K_3=0 and $T_{SSB,RO}$=10 ms for FR1 PRACH configuration 1 under CCA.

K_1 is the number of SMTC occasions not available at the UE due during RRC re-establishment period on the carrier with CCA and with RF channel number # 1.

$K_{2,2}$ is the number of SMTC occasions not available at the UE during RRC re-establishment period on the carrier with CCA and with RF channel number # 2.

This gives total $T_{UE_re-establish_delay_CCA}$=1350+MAX (800 ms, (10+ K_1) x 20) ms+MAX (800 ms, ([13]+$K_{2,2}$) x 20) ms.

A.11.2.2.2 Random Access

A.11.2.2.2.1 4-step RA type contention-based random access for NR PCell with CCA

A.11.2.2.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits when subject to CCA. This test will verify the requirements in Clause 6.2.2A.2 and Clause 7.1.2 in an AWGN model.

For this test one cell is used and configured as PCell in FR1, which operates on a carrier frequency with CCA. Supported test parameters are shown in Table A.11.2.2.2.1.1-1. UE capable of SA with PCell in FR1 needs to be tested by using the parameters in Table A.11.2.2.2.1.1-2.

Table A.11.2.2.2.1.1-1: Supported test configurations for contention based random access test for FR1 PCell with CCA

Config	Description
1	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: Void	

Table A.11.2.2.2.1.1-2: General test parameters for contention based random access test for FR1 PCell with CCA

Parameter	Unit	Test-1	Comments

SSB Configuration	Note 4, 6	Config 1		SSB.3 CCA	As defined in A.3.10A
	Note 5, 6	Config 1		SSB.4 CCA	As defined in A.3.10A
DBT Window Configuration		Config 1		DBT.1	As specified in A.3.28.1
DL CCA model		Config 1		As specified in A.3.26.2.1	
UL CCA model		Config 1		As specified in A.3.26.2.2	
Duplex Mode for Cell 2		Config 1		TDD	
TDD Configuration		Config 1		TDDConf.1.1 CCA	
OCNG Pattern Note 1				OCNG pattern 1	As defined in A.3.2.1.
PDSCH parameters Note 3		Config 1		SR.1.1 CCA	As defined in A.3.1A.1.
NR RF Channel Number				1	
EPRE ratio of PSS to SSS			dB	0	
EPRE ratio of PBCH_DMRS to SSS			dB		
EPRE ratio of PBCH to PBCH_DMRS			dB		
EPRE ratio of PDCCH_DMRS to SSS			dB		
EPRE ratio of PDCCH to PDCCH_DMRS			dB		
EPRE ratio of PDSCH_DMRS to SSS			dB		
EPRE ratio of PDSCH to PDSCH_DMRS			dB		
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	Power of SSB with index 0 is set to be above configured *rsrp-ThresholdSSB*
	N_{oc}	Config 1	dBm/15kHz	-101	
	$\hat{E}_s / N_{oc}$		dB	3	
	SS-RSRP		dBm/ SCS	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured *rsrp-ThresholdSSB*
	N_{oc}	Config 1	dBm/15kHz	-101	
	$\hat{E}_s / N_{oc}$		dB	-17	
	SS-RSRP		dBm/ SCS	-115	
Io Note 2		Config 1	dBm	-62.2/38.16MHz	For symbols without SSB index 1
ss-PBCH-BlockPower			dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [2].
Configured UE transmitted power ($P_{CMAX,f,c}$)			dBm	23	As defined in clause 6.2.4 in TS 38.101-1.
PRACH Configuration				FR1 PRACH configuration 1 under CCA	As defined in A.3.8A.2.
DL CCA probability P_{CCA_DL}	Note 4, 6			0.9375	
	Note 5, 6			0.75 / 0.75	
L_{CCA_DL} Note 7				4	
W_{CCA_DL} Note 8				Inf	
UL CCA probability P_{CCA_UL}	Note 4, 6			0.87	
	Note 5, 6			0.75	
L_{CCA_UL} Note 7				5	
W_{CCA_UL} Note 8				Inf	
Semi-static channel access config period Note 4, 6			ms	2	
Propagation Condition			-	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.

Note 2:	SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.
Note 3:	The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.
Note 4:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 5:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2}.
Note 6:	For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic channel occupancy and semi-static channel occupancy configuration.
Note 7:	L_{CCA_DL} and L_{CCA_UL} are chosen such that preambleTransMax > 5 + L_{CCA_DL} + L_{CCA_UL}.
Note 8:	A window W_{CCA_DL}=W_{CCA_UL}=Inf is used to indicate that L_{CCA_DL} and L_{CCA_UL} are considered during the entire duration of a test run.

A.11.2.2.2.1.2 Test Requirements

Contention based random access is triggered by *not* explicitly assigning a random access preamble via dedicated signalling in the downlink.

A.11.2.2.2.1.2.1 Random Access Preamble Transmission

To test the UE behavior specified in Clause 6.2.2A.2.1.1 the System Simulator shall receive the Random Access Preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SS-RSRP above the configured *rsrp-ThresholdSSB*, if the UL CCA is successful.

The three requirements below are relevant for all cases of PRACH transmissions described within the whole clause A.11.2.2.2.1.2:

- The System Simulator shall implement the UL CCA model of A.3.26.2 for the RACH occasions where PRACH transmissions are expected. The System Simulator shall monitor the RACH occasions to detect if the UE is transmitting PRACH preambles. If a PRACH transmission is detected on a RACH occasion that is expected to have UL CCA failure, the test is considered as failed.

- In case of CCA DL failure, the test equipment should verify that the UE does not transmit PRACH for semi-static channel access mode; for dynamic channel access mode it is assumed that RACH occasions are always scheduled within a UE-initiated COT.

- In case of UL CCA failure, The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS38.321 [7], and transmit with the calculated PRACH transmission power.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2A.2. The power of the first preamble shall be -16 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.11.2.2.2.1.2.2 Random Access Response Reception

To test the UE behavior specified in Clause 6.2.2A.2.1.2 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a Random Access Response *not* corresponding to the transmitted Random Access Preamble. In case of CCA DL failure, the test equipment should delay the transmission of Random Access Response.

The UE may stop monitoring for Random Access Response(s) and shall transmit the msg3 if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble if UL CCA is successful. The System Simulator shall monitor if the UE is transmitting msg3 when CCA UL failure. If a msg3 transmission is detected on a grant expected to have UL CCA failure, the test is considered as failed.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2A.2. The power of the first preamble shall be -16 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.11.2.2.2.1.2.3 No Random Access Response Reception

To test the UE behavior specified in clause 6.2.2A.2.1.3 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles. In case of CCA DL failure, the test equipment should delay the transmission of Random Access Response.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2A.2. The power of the first preamble shall be -16 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.11.2.2.2.1.2.4 Receiving an UL grant for msg3 retransmission

To test the UE behavior specified in clause 6.2.2A.2.1.4 the System Simulator shall provide an UL grant for msg3 retransmission following a successful Random Access Response if UL CCA is successful. The System Simulator shall monitor if the UE is transmitting msg3 when CCA UL failure. If a msg3 is detected on a grant expected to have UL CCA failure, the test is considered as failed.

The UE shall re-transmit the msg3 upon the reception of an UL grant for msg3 retransmission.

A.11.2.2.2.1.2.5 Reception of an Incorrect Message over Temporary C-RNTI

To test the UE behavior specified in Clause 6.2.2A.2.1.5 the System Simulator shall send a message addressed to the temporary C-RNTI with a UE Contention Resolution Identity included in the MAC control element *not* matching the CCCH SDU transmitted in msg3 uplink message.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires unless the received message includes a UE Contention Resolution Identity MAC control element and the UE Contention Resolution Identity included in the MAC control element matches the CCCH SDU transmitted in the uplink message.

A.11.2.2.2.1.2.6 Reception of a Correct Message over Temporary C-RNTI

To test the UE behavior specified in Clause 6.2.2A.2.1.5 the System Simulator shall send a message addressed to the temporary C-RNTI with a UE Contention Resolution Identity included in the MAC control element matching the CCCH SDU transmitted in the msg3 uplink message.

The UE shall send ACK if the Contention Resolution is successful.

A.11.2.2.2.1.2.7 Contention Resolution Timer expiry

To test the UE behavior specified in Clause 6.2.2A.2.1.6 the System Simulator shall *not* send a response to a msg3.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if the Contention Resolution Timer expires.

A.11.2.2.2.2 4-step RA type non-contention based random access for NR PSCell with CCA

A.11.2.2.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits when subject to CCA. This test will verify the requirements in Clause 6.2.2A.2 and Clause 7.1.2 in an AWGN model.

For this test one cell is used and configured as PCell in FR1, which operates on a carrier frequency with CCA. Supported test parameters are shown in Table A.11.2.2.2.2.1-1. UE capable of SA with PCell in FR1 needs to be tested by using the parameters in Table A.11.2.2.2.2.1-2.

Table A.11.2.2.2.2.1-1: Supported test configurations for non-contention based random access test for FR1 PCell with CCA

Config	Description
1	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: Void	

Table A.11.2.2.2.2.1-2: General test parameters for non-contention based random access test for FR1 PCell with CCA

Parameter			Unit	Test-1	Comments
SSB Configuration	Note 4, 6	Config 1		SSB.3 CCA	As defined in A.3.10A
	Note 5, 6	Config 1		SSB.4 CCA	As defined in A.3.10A
DBT Window Configuration		Config 1		DBT.1	As specified in A.3.28.1
DL CCA model		Config 1		As specified in A.3.26.2.1	
UL CCA model		Config 1		As specified in A.3.26.2.2	
Duplex Mode for Cell 2		Config 1		TDD	
TDD Configuration		Config 1		TDDConf.1.1 CCA	
OCNG Pattern Note 1				OCNG pattern 1	As defined in A.3.2.1.
PDSCH parameters Note 3		Config 1		SR.1.1 CCA	As defined in A.3.1A.1.
NR RF Channel Number				1	
EPRE ratio of PSS to SSS			dB	0	
EPRE ratio of PBCH_DMRS to SSS			dB		
EPRE ratio of PBCH to PBCH_DMRS			dB		
EPRE ratio of PDCCH_DMRS to SSS			dB		
EPRE ratio of PDCCH to PDCCH_DMRS			dB		
EPRE ratio of PDSCH_DMRS to SSS			dB		
EPRE ratio of PDSCH to PDSCH_DMRS			dB		

SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	Power of SSB with index 0 is set to be above configured *rsrp-ThresholdSSB*
	N_{oc}	Config 1	dBm/15kHz	-101	
	$\hat{E}_s / N_{oc}$		dB	3	
	SS-RSRP		dBm/ SCS	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured *rsrp-ThresholdSSB*
	N_{oc}	Config 1	dBm/15kHz	-101	
	$\hat{E}_s / N_{oc}$		dB	-17	
	SS-RSRP		dBm/ SCS	-115	
Io Note 2		Config 1	dBm	-62.2/38.16MHz	For symbols without SSB index 1
ss-PBCH-BlockPower			dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [2].
Configured UE transmitted power ($P_{CMAX,\ f,\ c}$)			dBm	23	As defined in clause 6.2.4 in TS 38.101-1.
PRACH Configuration				FR1 PRACH configuration 2 under CCA	As defined in A.3.8A.2.
DL CCA probability		Note 4, 6		0.9375	
P_{CCA_DL}		Note 5, 6		0.75 / 0.75	
L_{CCA_DL} Note 7				4	
W_{CCA_DL} Note 8				Inf	
UL CCA probability		Note 4, 6		0.87	
P_{CCA_UL}		Note 5, 6		0.75	
L_{CCA_UL} Note 7				5	
W_{CCA_UL} Note 8				Inf	
Semi-static channel access config period Note 4, 6			ms	2	
Propagation Condition			-	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.
Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.
Note 3: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.
Note 4: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 5: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2}.
Note 6: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic channel occupancy and semi-static channel occupancy configuration.
Note 7: L_{CCA_DL} and L_{CCA_UL} are chosen such that preambleTransMax > 5 + L_{CCA_DL} + L_{CCA_UL}.
Note 8: A window W_{CCA_DL}=W_{CCA_UL}=Inf is used to indicate that L_{CCA_DL} and L_{CCA_UL} are considered during the entire duration of a test run.

A.11.2.2.2.2.2 Test Requirements

Non-Contention based random access is triggered by explicitly assigning a random access preamble via dedicated signalling in the downlink. In the test, the non-contention based random access procedure is not initialized for Other SI requested from UE or beam failure recovery.

A.11.2.2.2.2.2.1 SSB-based Random Access Preamble Transmission

In Test-1, to test the UE behavior specified in Clause 6.2.2A.2.2.1 for SSB-based Random Access Preamble transmission, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs configured, the System Simulator shall receive the Random Access Preamble which has the Preamble Index associated with the SSB with index 0.

The three requirements below are relevant for all cases of PRACH transmissions described within the clause A.11.2.2.2.2.2:

- The System Simulator shall implement the UL CCA model of A.3.26.2 for the RACH occasions where PRACH transmissions are expected. The System Simulator shall monitor the RACH occasions to detect if the UE is transmitting PRACH preambles. If a PRACH transmission is detected on a RACH occasion that is expected to have UL CCA failure, the test is considered as failed.

- In case of CCA DL failure, the test equipment should verify that the UE does not transmit PRACH for semi-static channel access mode; for dynamic channel access mode it is assumed that RACH occasions are always scheduled within a UE-initiated COT.

- In case of UL CCA failure The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS38.321 [7], and transmit with the calculated PRACH transmission power.

In addition, the System Simulator shall receive the Random Access Preamble on the PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0, and the selected PRACH occasion shall belong to the PRACH occasions permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2A.2. The power of the first preamble shall be -16 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.11.2.2.2.2.2.2 Random Access Response Reception

To test the UE behavior specified in Clause 6.2.2A.2.2.2 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a Random Access Response *not* corresponding to the transmitted Random Access Preamble. In case of CCA DL failure, the test equipment should delay the transmission of Random Access Response.

The UE may stop monitoring for Random Access Response(s) if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble if UL CCA is successful. The System Simulator shall monitor if the UE is transmitting msg3 when CCA UL failure. If a msg3 is detected on a grant expected to have UL CCA failure, the test is considered as failed.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2A.2. The power of the first preamble shall be -16 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.11.2.2.2.2.2.3 No Random Access Response Reception

To test the UE behavior specified in clause 6.2.2A.2.2.3 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles. In case of CCA DL failure, the test equipment should delay the transmission of Random Access Response.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window configured in *RACH-ConfigCommon*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2A.2. The power of the first preamble shall be -16 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.11.2.2.2.3 2-step RA type contention-based random access for NR PCell with CCA

A.11.2.2.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the 2-step RA type random access procedure is according to the requirements and that the MsgA PRACH, MsgA PUSCH power settings and timing are within specified limits when subject to CCA. This test will verify the requirements in Clause 6.2.2A.3 and Clause 7.1.2 in an AWGN model.

For this test one cell is used and configured as PCell in FR1, which operates on a carrier frequency with CCA. Supported test parameters are shown in Table A.11.2.2.2.3.1-1. UE capable of SA with PCell in FR1 needs to be tested by using the parameters in Table A.11.2.2.2.3.1-2.

Table A.11.2.2.2.3.1-1: Supported test configurations for 2-step RA type contention based random access with successRAR test for FR1 PCell with CCA

Config	Description
1	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: Void	

Table A.11.2.2.2.3.1-2: General test parameters for 2-step RA type contention based random access with successRAR test for FR1 PCell with CCA

Parameter			Unit	Test-1	Comments
SSB Configuration	Note 4, 6	Config 1		SSB.3 CCA	As defined in A.3.10A
	Note 5, 6	Config 1		SSB.4 CCA	As defined in A.3.10A
DBT Window Configuration		Config 1		DBT.1	As specified in A.3.28.1

DL CCA model		Config 1		As specified in A.3.26.2.1	
UL CCA model		Config 1		As specified in A.3.26.2.2	
Duplex Mode for Cell 2		Config 1		TDD	
TDD Configuration		Config 2		TDDConf.1.1 CCA	
OCNG Pattern Note 1				OCNG pattern 1	As defined in A.3.2.1.
PDSCH parameters Note 3		Config 1		SR.1.1 CCA	As defined in A.3.1A.1.
NR RF Channel Number				1	
EPRE ratio of PSS to SSS			dB	0	
EPRE ratio of PBCH_DMRS to SSS			dB		
EPRE ratio of PBCH to PBCH_DMRS			dB		
EPRE ratio of PDCCH_DMRS to SSS			dB		
EPRE ratio of PDCCH to PDCCH_DMRS			dB		
EPRE ratio of PDSCH_DMRS to SSS			dB		
EPRE ratio of PDSCH to PDSCH_DMRS			dB		
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	Power of SSB with index 0 is set to be above configured *msgA-RSRP-ThresholdSSB*
	N_{oc}	Config 1	dBm/15kHz	-101	
	$\hat{E}_s / N_{oc}$		dB	3	
	SS-RSRP		dBm/ SCS	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured *msgA-RSRP-ThresholdSSB*
	N_{oc}	Config 1	dBm/15kHz	-101	
	$\hat{E}_s / N_{oc}$		dB	-17	
	SS-RSRP		dBm/ SCS	-115	
Io Note 2		Config 1	dBm	-62.2/38.16MHz	For symbols without SSB index 1
ss-PBCH-BlockPower			dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [2].
Configured UE transmitted power ($P_{CMAX,f,c}$)			dBm	23	As defined in clause 6.2.4 in TS 38.101-1.
MsgA Configuration				FR1 MsgA configuration 1 under CCA	As defined in A.3.20A.2.
msgA-RSRP-ThresholdSSB			dBm	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [2].
DL CCA probability		Note 4, 6		0.9375	
P_{CCA_DL}		Note 5, 6		0.75 / 0.75	
L_{CCA_DL} Note 7				4	
W_{CCA_DL} Note 8				Inf	
UL CCA probability		Note 4, 6		0.87	
P_{CCA_UL}		Note 5, 6		0.75	
L_{CCA_UL} Note 7				5	
W_{CCA_UL} Note 8				Inf	
Semi-static channel access config period Note 4, 6			ms	2	
Propagation Condition			-	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.

Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.

Note 3: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.

Note 4: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 5: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2}.

Note 6:	For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic channel occupancy and semi-static channel occupancy configuration.
Note 7:	L_{CCA_DL} and L_{CCA_UL} are chosen such that preambleTransMax > 5 + L_{CCA_DL} + L_{CCA_UL}.
Note 8:	A window W_{CCA_DL}=W_{CCA_UL}=Inf is used to indicate that L_{CCA_DL} and L_{CCA_UL} are considered during the entire duration of a test run.

A.11.2.2.2.3.2 Test Requirements

Contention based random access is triggered by *not* explicitly assigning a random access preamble via dedicated signalling in the downlink.

A.11.2.2.2.3.2.1 MsgA Transmission

To test the UE behavior specified in Clause 6.2.2A.3.1.1 the System Simulator shall receive the MsgA with a preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SS-RSRP above the configured *msgA-RSRP-ThresholdSSB*, if the UL CCA is successful.

The three requirements below are relevant for all cases of MsgA transmissions described within the clause A.11.2.2.2.3.2:

- The System Simulator shall implement the UL CCA model for the MsgA occasions (i.e. both MsgA PRACH and MsgA PUSCH occasions) where MsgA transmissions are expected. The System Simulator shall monitor the MsgA occasions to detect if the UE is transmitting MsgA. If a MsgA transmission is detected on MsgA occasions that are expected to have UL CCA failure, the test is considered as failed.

- In case of CCA DL failure, the test equipment should verify that the UE does not transmit MsgA for semi-static channel access mode; for dynamic channel access mode it is assumed that MsgA occasions are always scheduled within a UE-initiated COT.

- The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS38.321 [7], and transmit with the calculated PRACH transmission power in case of UL CCA failure.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2A.3. The power of the first MsgA preamble transmission shall be -16 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.11.2.2.2.3.2.2 MsgB Reception

To test the UE behavior specified in Clause 6.2.2A.3.1.2 the System Simulator shall transmit a MsgB containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a MsgB *not* corresponding to the transmitted Random Access Preamble. In case of CCA DL failure, the test equipment should delay the transmission of MsgB.

The UE may stop monitoring for MsgB(s) and shall transmit an ACK if the MsgB with a successRAR contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble and if the Contention Resolution is successful and if UL CCA is successful. The System Simulator shall monitor if the UE is transmitting ACK in the case of CCA UL failure. If ACK transmission is detected on a grant expected to have UL CCA failure, the test is considered as failed.

The UE may stop monitoring for MsgB(s) and shall transmit the msg3 if the MsgB with a fallbackRAR contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble if UL CCA is

successful. The System Simulator shall monitor if the UE is transmitting msg3 when CCA UL failure. If a msg3 is detected on a grant expected to have UL CCA failure, the test is considered as failed.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires if all received MsgB(s) contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2A.3. The power of the first MsgA preamble shall be -16 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.11.2.2.2.3.2.3 No MsgB Reception

To test the UE behavior specified in clause 6.2.2A.3.1.3 the System Simulator shall transmit a MsgB containing a successRAR message and a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles. In case of CCA DL failure, the test equipment should delay the transmission of MsgB.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires if no MsgB is received within the MsgB Response window.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2A.3. The power of the first MsgA preamble shall be -16 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.11.2.2.2.4 2-step RA type non-contention-based random access for NR PCell with CCA

A.11.2.2.2.4.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the MsgA PRACH, MsgA PUSCH power settings and timing are within specified limits when subject to CCA. This test will verify the requirements in Clause 6.2.2A.3 and Clause 7.1.2 in an AWGN model.

For this test one cell is used and configured as PCell in FR1, which operates on a carrier frequency with CCA. Supported test parameters are shown in Table A.11.2.2.2.4.1-1. UE capable of SA with PCell in FR1 needs to be tested by using the parameters in Table A.11.2.2.2.4.1-2.

Table A.11.2.2.2.4.1-1: Supported test configurations for non-contention based random access test for FR1 PCell with CCA

Config	Description
1	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: Void	

Table A.11.2.2.2.4.1-2: General test parameters for non-contention based random access test for FR1 PCell with CCA

Parameter			Unit	Test-1	Comments
SSB Configuration	Note 4, 6	Config 1		SSB.3 CCA	As defined in A.3.10A
	Note 5, 6	Config 1		SSB.4 CCA	As defined in A.3.10A
DBT Window Configuration		Config 1		DBT.1	As specified in A.3.28.1
DL CCA model		Config 1		As specified in A.3.26.2.1	
UL CCA model		Config 1		As specified in A.3.26.2.2	
Duplex Mode for Cell 1		Config 1		TDD	
TDD Configuration		Config 1		TDDConf.1.1 CCA	
OCNG Pattern Note 1				OCNG pattern 1	As defined in A.3.2.1.
PDSCH parameters Note 3		Config 1		SR.1.1 CCA	As defined in A.3.1A.1.
NR RF Channel Number				1	
EPRE ratio of PSS to SSS			dB	0	
EPRE ratio of PBCH_DMRS to SSS			dB		
EPRE ratio of PBCH to PBCH_DMRS			dB		
EPRE ratio of PDCCH_DMRS to SSS			dB		
EPRE ratio of PDCCH to PDCCH_DMRS			dB		
EPRE ratio of PDSCH_DMRS to SSS			dB		
EPRE ratio of PDSCH to PDSCH_DMRS			dB		
msgA-*RSRP-ThresholdSSB*			dBm	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [2].
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	Power of SSB with index 0 is set to be above configured msgA-*RSRP-ThresholdSSB*
	N_{oc}	Config 1	dBm/15kHz	-101	
	$\hat{E}_s / N_{oc}$		dB	3	
	SS-RSRP		dBm/ SCS	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured msgA-*RSRP-ThresholdSSB*
	N_{oc}	Config 1	dBm/15kHz	-101	
	$\hat{E}_s / N_{oc}$		dB	-17	
	SS-RSRP		dBm/ SCS	-115	
Io Note 2		Config 1	dBm	-62.2/38.16MHz	For symbols without SSB index 1
ss-PBCH-BlockPower			dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [2].
Configured UE transmitted power ($P_{CMAX,\ f,\ c}$)			dBm	23	As defined in clause 6.2.4 in TS 38.101-1.
MsgA Configuration				FR1 MsgA configuration 2 under CCA	As defined in A.3.20A.2.
DL CCA probability P_{CCA_DL}	Note 4, 6			0.9375	
	Note 5, 6			0.75 / 0.75	
L_{CCA_DL} Note 7				4	

W_{CCA_DL} Note 8			Inf	
UL CCA probability	Note 4, 6		0.87	
P_{CCA_UL}	Note 5, 6		0.75	
L_{CCA_UL} Note 7			5	
W_{CCA_UL} Note 8			Inf	
Semi-static channel access config period Note 4, 6		ms	2	
Propagation Condition		-	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.
Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.
Note 3: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.
Note 4: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 5: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2}.
Note 6: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic channel occupancy and semi-static channel occupancy configuration.
Note 7: L_{CCA_DL} and L_{CCA_UL} are chosen such that preambleTransMax > 5 + L_{CCA_DL} + L_{CCA_UL}.
Note 8: A window W_{CCA_DL}=W_{CCA_UL}=Inf is used to indicate that L_{CCA_DL} and L_{CCA_UL} are considered during the entire duration of a test run.

A.11.2.2.2.4.2 Test Requirements

Non-Contention based random access is triggered by explicitly assigning a random access preamble via dedicated signalling in the downlink. In the test, the non-contention based random access procedure is not initialized for Other SI requested from UE or beam failure recovery.

A.11.2.2.2.4.2.1 MsgA Transmission

To test the UE behavior specified in Clause 6.2.2A.3.2.1, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs configured, the System Simulator shall receive the MsgA with a preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0.

In addition, the System Simulator shall receive the MsgA PRACH on the PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0, and the selected PRACH occasion shall belong to the PRACH occasions permitted by the restrictions given first by the *msgA-SSB-SharedRO-MaskIndex* if configured, or next by the *ra-ssb-OccasionMaskIndex* if configured.

The three requirements below are relevant for all cases of MsgA transmissions described within the clause A.11.2.2.2.4.2:

- The System Simulator shall implement the UL CCA model for the MsgA occasions (i.e. both MsgA PRACH and MsgA PUSCH occasions) where MsgA transmissions are expected. The System Simulator shall monitor the MsgA occasions to detect if the UE is transmitting MsgA. If a MsgA transmission is detected on MsgA occasions that are expected to have UL CCA failure, the test is considered as failed.

- In case of CCA DL failure, the test equipment should verify that the UE does not transmit MsgA for semi-static channel access mode; for dynamic channel access mode it is assumed that MsgA occasions are always scheduled within a UE-initiated COT.

- The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS38.321 [7], and transmit with the calculated PRACH transmission power in case of UL CCA failure.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2A.3. The power of the first MsgA preamble shall be -16 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.11.2.2.2.4.2.2 MsgB Reception

To test the UE behavior specified in Clause 6.2.2A.3.2.2 the System Simulator shall transmit a MsgB containing a fallbackRAR containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a MsgB *not* corresponding to the transmitted Random Access Preamble. In case of CCA DL failure, the test equipment should delay the transmission of MsgB.

The UE may stop monitoring for MsgB(s) and shall transmit the msg3 containing the payload of MsgA PUSCH if the MsgB with a fallbackRAR contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble if UL CCA is successful. The System Simulator shall monitor if the UE is transmitting msg3 when CCA UL failure. If a msg3 is detected on a grant expected to have UL CCA failure, the test is considered as failed. The UE shall monitor contention resolution as described in clause 8.2A in TS 38.213 [3].

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires if all received MsgB's contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

The system simulator shall implement the UL CCA model of A.3.26.2 for the MsgA occasions where MsgA System Simulator transmissions are expected. The System Simulator shall monitor the MsgA occasions to detect if the UE is transmitting MsgA. If a MsgA transmission is detected on a MsgA occasion that is expected to have UL CCA failure, the test is considered as failed.

In case of CCA DL failure, the test equipment should verify that the UE does not transmit MsgA for semi-static channel access mode.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS38.321 [7], and transmit with the calculated MsgA transmission power in case UL CCA failure.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2A.3. The power of the first MsgA preamble shall be -16 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA and msg3 transmissions shall be within the accuracy specified in Clause 7.1.2.

A.11.2.2.2.4.2.3 No MsgB Reception

To test the UE behavior specified in clause 6.2.2A.3.2.3 the System Simulator shall transmit a MsgB containing a successRAR message and a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles. In case of CCA DL failure, the test equipment should delay the transmission of MsgB.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA transmission power when the backoff time expires if no MsgB is received within the MsgB Response window.

The System Simulator shall implement the UL CCA model of A.3.26.2 for the MsgA occasions where MsgA transmissions are expected. The System Simulator shall monitor the MsgA occasions to detect if the UE is

transmitting MsgA. If a MsgA transmission is detected on a MsgA occasion that is expected to have UL CCA failure, the test is considered as failed.

In case of CCA DL failure, the test equipment should verify that the UE does not transmit MsgA for semi-static channel access mode.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS38.321 [7], and transmit with the calculated MsgA transmission power in case UL CCA failure.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2A.3. The power of the first MsgA preamble shall be -16 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.11.2.2.3 RRC connection release with redirection

A.11.2.2.3.1 Redirection from NR FR1 carrier under CCA to NR FR1 carrier under CCA

A.11.2.2.3.1.1 Test Purpose and Environment

This test is to verify RRC connection release with redirection from NR FR1 carrier under CCA to NR FR1 carrier under CCA specified in clause 6.2.3.2.3.

A.11.2.2.3.1.2 Test Parameters

Supported test configurations are shown in table A.11.2.2.3.1.2-1. The time delay is tested by using the parameters in table A.11.2.2.3.1.2-2, and A.11.2.2.3.1.2-3.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. The *RRCRelease* message shall be sent to the UE during period T1 and the start of T2 is the instant when the last TTI containing the RRC message is sent to the UE. Prior to time duration T2, the UE shall not have any timing information of Cell 2. Cell 2 is powered up at the beginning of the T2.

Table A.11.2.2.3.1.2-1: Redirection from NR to NR test configurations

Config	Description
1	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Table A.11.2.2.3.1.2-2: General test parameters for Redirection from NR to NR test case

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	On the carrier under CCA
	Neighbouring cell		Cell 2	On the carrier under CCA
Final condition	Active cell		Cell 2	On the carrier under CCA
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
DL CCA model	Dynamic channel access Note 1, 3		As specified in clause A.3.26.2.1	
	Semi-static channel access Note 2, 3			

UL CCA model	Dynamic channel access Note 1, 3		As specified in clause A.3.26.2.2	
	Semi-static channel access Note 2,3			
T1		s	5	
T2		s	≥ $T_{connection_release_redirect_NR_CCA}$	$T_{connection_release_redirect_NR_CCA}$ is defined in clause 6.2.3.2.3
NOTE 1: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy. NOTE 2: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy. NOTE 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.				

Table A.11.2.2.3.1.2-3: Cell specific test parameters for Redirection from NR to NR test case

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number			1		2	
P_{CCA_DL} for dynamic channel access Note 4,6		-	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	
P_{CCA_DL} for semi-static channel access Note 5,6		-	P_{CCA_DL}=0.9375		P_{CCA_DL}=0.9375	
P_{CCA_UL} for dynamic channel access Note 4,6		-	1		1	
P_{CCA_UL} for semi-static channel access Note 5,6		-	1		1	
L_{CCA_DL} Note 7			N/A		8	
W_{CCA_DL} Note 7		ms	N/A		$T_{identify-NR_CCA}$	
TDD configuration	Config 1		TDDConf.1.1 CCA			
$BW_{channel}$	Config 1		40: $N_{RB,c}$ = 106			
BWP BW	Config 1		40: $N_{RB,c}$ = 106			
DRX Cycle		ms	Not Applicable			
PDSCH Reference	Config 1		SR.1.1 CCA			
RMSI CORESET Reference Channel	Config 1		CR.1.1 CCA			
Dedicated CORESET RMC configuration	Config 1		CCR.1.1 CCA			
TRS configuration	Config 1		TRS.1.2 TDD			
OCNG Patterns			OP.1			
SMTC Configuration			SMTC.1			
DBT configuration			DBT.1			
SSB configuration for semi-static channel access Note 4, 6	Config 1		SSB.1 CCA			
SSB configuration for dynamic channel access Note 5, 6	Config 1		SSB.2 CCA			
ssb-PositionQCL	Config 1		[1]			
PDSCH/PDCCH subcarrier spacing	Config 1	kHz	30 kHz			
PUCCH/PUSCH subcarrier spacing	Config 1	kHz	30 kHz			
PRACH configuration			FR1 PRACH configuration 1 under CCA			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						

EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-98			
N_{oc} Note2	Config 1	dBm/SCS	-95			
$\hat{E}_s / I_{ot}$		dB	4	4	-infinity	4
$\hat{E}_s / N_{oc}$		dB	4	4	-infinity	4
Io Note3	Config 1	dBm/ 38.16MHz	-58.49	-58.49	-63.94	-58.49
Propagation condition		-	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 5: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 6: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.
Note 7: As defined in clause 6.2.3.2.3 for $T_{rs} \leq 40$ ms.

A.11.2.2.3.1.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than $T_{connection_release_redirect_NR_CCA}$ ms from the beginning of time period T2, where $T_{connection_release_redirect_NR_CCA}$ is defined in clause 6.2.3.2.3.
The rate of correct RRC connection release redirection to NR observed during repeated tests shall be at least 90%.

NOTE: The redirection delay can be expressed as:

$$T_{connection_release_redirect_NR_CCA} = T_{RRC_procedure_delay} + T_{identify\text{-}NR_CCA} + T_{SI\text{-}NR_CCA} + T_{RACH_CCA},$$

where:

$T_{RRC_procedure_delay}$ = 110 ms in the test.

$T_{identify\text{-}NR_CCA}$ = MAX (680 ms, $(L_1+11) \times 20$ ms) in the test.

$T_{SI\text{-}NR}$ = 1280 ms, it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target NR cell.

T_{RACH_CCA} is the delay uncertainty in acquiring the first available PRACH occasion in the target NR cell.

L_1 is the number of SMTC occasions not available at the UE due to DL CCA failures. The test equipment ensure that number of L_1 in target cell does not exceed $L_{1,max}$ using the configured L_{CCA_DL} as in clause A.3.26.2.1;

A.11.2.2.3.2 Redirection from NR FR1 carrier without CCA to NR FR1 carrier with CCA

A.11.2.2.3.2.1 Test Purpose and Environment

This test is to verify RRC connection release with redirection from NR FR1 carrier without CCA to NR FR1 carrier with CCA specified in clause 6.2.3.2.3.

A.11.2.2.3.2.2 Test Parameters

Supported test configurations are shown in table A.11.2.2.3.2.2-1. The time delay is tested by using the parameters in table A.11.2.2.3.2.2-2, and A.11.2.2.3.2.2-3.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. The *RRCRelease* message shall be sent to the UE during period T1 and the start of T2 is the instant when the last TTI containing the RRC message is sent to the UE. Prior to time duration T2, the UE shall not have any timing information of Cell 2. Cell 2 is powered up at the beginning of the T2.

Table A.11.2.2.3.2.2-1: Redirection from NR to NR test configurations

Configuration	Source cell without CCA	Target cell with CCA
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD	30 kHz SSB SCS, 40 MHz bandwidth, TDD
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD	30 kHz SSB SCS, 40 MHz bandwidth, TDD
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD	30 kHz SSB SCS, 40 MHz bandwidth, TDD
Note: The UE is only required to be tested in one of the supported test configurations		

Table A.11.2.2.3.2.2-2: General test parameters for Redirection from NR to NR test case

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	On the carrier without CCA
	Neighbouring cell		Cell 2	On the carrier under CCA
Final condition	Active cell		Cell 2	On the carrier under CCA
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
DL CCA model	Dynamic channel access Note 1, 3		As specified in clause A.3.26.2.1	
	Semi-static channel access Note 2, 3			
UL CCA model	Dynamic channel access Note 1, 3		As specified in clause A.3.26.2.2	
	Semi-static channel access Note 2,3			
T1		s	5	
T2		s	≥ $T_{connection_release_redirect_NR_CCA}$	$T_{connection_release_redirect_NR_CCA}$ is defined in clause 6.2.3.2.3
NOTE 1: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy. NOTE 2: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy. NOTE 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.				

Table A.11.2.2.3.2.2-3: Cell specific test parameters for Redirection from NR to NR test case

Parameter	Unit	Cell 1		Cell 2	
		T1	T2	T1	T2
NR RF Channel Number		1		2	
P_{CCA_DL} for dynamic channel access Note 4,6		N/A		$P_{CCA_DL_1}$=0.75	$P_{CCA_DL_1}$=0.75

				$P_{CCA_DL_2}$=0.75	$P_{CCA_DL_2}$=0.75
P_{CCA_DL} for semi-static channel access Note 5,6			N/A	P_{CCA_DL}=0.9375	P_{CCA_DL}=0.9375
P_{CCA_UL} for dynamic channel access Note 4,6			N/A	1	1
P_{CCA_UL} for semi-static channel access Note 5,6			N/A	1	1
L_{CCA_DL} Note 7			N/A	8	
W_{CCA_DL} Note 7		ms	N/A	$T_{identify\text{-}NR_CCA}$	
Duplex mode	Config 1		FDD	TDD	
	Config 2,3		TDD		
TDD configuration	Config 1		Not Applicable	TDDConf.1.1 CCA	
	Config 2		TDDConf.1.1	TDDConf.1.1 CCA	
	Config 3		TDDConf.2.1	TDDConf.1.1 CCA	
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52	40: $N_{RB,c}$ = 106	
	Config 2		10: $N_{RB,c}$ = 52	40: $N_{RB,c}$ = 106	
	Config 3		40: $N_{RB,c}$ = 106		
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52	40: $N_{RB,c}$ = 106	
	Config 2		10: $N_{RB,c}$ = 52	40: $N_{RB,c}$ = 106	
	Config 3		40: $N_{RB,c}$ = 106		
DRX Cycle		ms	Not Applicable		
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	SR.1.1 CCA	
	Config 2		SR.1.1 TDD	SR.1.1 CCA	
	Config 3		SR2.1 TDD	SR.1.1 CCA	
RMSI CORESET RMC configuration	Config 1		CR.1.1 FDD	CR.1.1 CCA	
	Config 2		CR.1.1 TDD	CR.1.1 CCA	
	Config 3		CR.2.1 TDD	CR.1.1 CCA	
Dedicated CORESET RMC configuration	Config 1		CCR.1.1 FDD	CCR.1.1 CCA	
	Config 2		CCR.1.1 TDD	CCR.1.1 CCA	
	Config 3		CCR.2.1 TDD	CCR.1.1 CCA	
OCNG Patterns			OCNG pattern 1		
SSB Configuration: Semi-static channel acces	Config 1,2		SSB.1 FR1	SSB.1 CCA	
SSB Configuration: Dymamic channel acces	Config 3		SSB.2 FR1	SSB.2 CCA	
SSB Configuration: Semi-static channel acces	Config 1,2		SSB.1 FR1	SSB.1 CCA	
SSB Configuration: Dymamic channel acces	Config 3		SSB.2 FR1	SSB.2 CCA	
SMTC configuration	Config 1,2		SMTC.1 FR1	SMTC.2 FR1	
	Config 3		SMTC.2 FR1		
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz	30 kHz	
	Config 3		30 kHz		
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15 kHz	30 kHz	
	Config 3		30 kHz		
PRACH configuration			FR1 PRACH configuration 1 under CCA in Table A.3.8A.2.1-1		
BWP configuration	Initial DL BWP		DLBWP.0.1		
	Dedicated DL BWP		DLBWP.1.1		
	Initial UL BWP		ULBWP.0.1		
	Dedicated UL BWP		ULBWP.1.1		
EPRE ratio of PSS to SSS		dB	0		
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS (Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					

N_{oc} Note2		dBm/15kHz	-98			
N_{oc} Note2	Config 1,2	dBm/SCS	-98		-95	
	Config 3		-95			
$\hat{E}_s/I_{ot}$		dB	4	4	-infinity	4
$\hat{E}_s/N_{oc}$		dB	4	4	-infinity	4
Io Note3	Config 1,2	dBm/9.36 MHz	-64.59	-64.59	N/A	N/A
	Config 3	dBm/38.16 MHz	-58.49	-58.49	-63.94	-58.49
Propagation condition		-	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 5: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 6: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.
Note 7: As defined in clause 6.2.3.2.3 for $T_{rs} \leq 40$ ms.

A.11.2.2.3.2.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than $T_{connection_release_redirect_NR_CCA}$ ms from the beginning of time period T2, where $T_{connection_release_redirect_NR_CCA}$ is defined in clause 6.2.3.2.3.
The rate of correct RRC connection release redirection to NR observed during repeated tests shall be at least 90%.

NOTE: The redirection delay can be expressed as:

$$T_{connection_release_redirect_NR_CCA} = T_{RRC_procedure_delay} + T_{identify\text{-}NR_CCA} + T_{SI\text{-}NR_CCA} + T_{RACH_CCA},$$

where:

$T_{RRC_procedure_delay}$ = 110 ms in the test.

$T_{identify\text{-}NR_CCA}$ = MAX (680 ms, $(L_1+11) \times 20$ ms) in the test.

$T_{SI\text{-}NR_CCA}$ = 1280 ms, it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target NR cell.

T_{RACH_CCA} is the delay uncertainty in acquiring the first available PRACH occasion in the target NR cell. $T_{RACH_CCA} = (1+L_2) \times T_{SSB,RO}$ + 10 ms; where $T_{SSB,RO}$ = 10 ms for FR1 PRACH configuration 1.

L_1 is the number of SMTC occasions not available at the UE due to DL CCA failures. The test equipment shall ensure that L_1 does not exceed $L_{1,max}$. In the test $L_{1,max} = L_{CCA_DL}$ which is defined in clause A.3.26.2.1.

L_2 is the consecutive number of SSB to PRACH occasion association periods during which no PRACH occasion is available for PRACH transmission due to UL CCA failures. $L_2 = 0$ in the test.

The total delay, $T_{connection_release_redirect_NR_CCA}$, shall be less than 1410 + MAX (680, $(L_1+11) \times 20$) ms.

A.11.3 Timing

A.11.3.1 UE transmit timing

A.11.3.1.1 UE Transmit Timing Test with PCell under DL CCA

A.11.3.1.1.1 Test Purpose and environment

The purpose of this test is to verify that the UE can follow frame timing change of the connected gNodeb when PCell is subject to DL CCA and that the UE initial transmit timing accuracy, maximum amount of timing change in one adjustment, minimum and maximum adjustment rate are within the specified limits. This test will verify the requirements in clause 7.1.2.

Supported test configurations are shown in Table 11.3.1.1.1-1

Table A.11.3.1.1.1-1: Supported test configuration for UE transmit timing test

Configuration	Description
1	NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz

For this test a single NR cell is used. Table A.11.3.1.1.1-2 defines the parameters to be configured and strength of the transmitted signals. The transmit timing is verified by the UE transmitting SRS using the configuration defined in Table A.11.3.1.1.1-3.

Table A.11.3.1.1.1-2: Cell Specific Test Parameters for UE transmit timing test

Parameter		Unit	Configuration	Test1	Test2
SSB ARFCN			1	1	1
TDD configuration			1	TDDConf.1.1 CCA	
$BW_{channel}$		MHz	1	40: $N_{RB,c}$ = 106	
Initial BWP Configuration			1	DLBWP.0.1 ULBWP.0.1	
Dedicated BWP Configuration			1	DLBWP.1.1 ULBWP.1.1	
DRX Cycle		ms	1	N/A	DRX.8 Note5
DL CCA model			1	As specified in clause A.3.26.2.1	
UL CCA model			1	As specified in clause A.3.26.2.2	
PDSCH Reference measurement channel			1	SR.1.1 CCA	
RMSI CORESET Reference Channel			1	CR.1.1 CCA	
Dedicated CORESET Reference Channel			1	CCR.1.1 CCA	
OCNG Patterns			1	OP.1	
SSB configuration	Semi- static channel acces		1	SSB.1 CCA	
	Dymamic channel acces		1	SSB.2 CCA	
SMTC Configuration			1	SMTC.1 FR1	
TRS configuration			1	TRS.1.2 TDD	
DL CCA probability for semi-static channel access (P_{CCA_DL})			1	0.9375	0.9375
DL CCA model probability for dynamic static channel access ($P_{CCA_DL_1}$)			1	0.75	0.75
DL CCA model probability for dynamic static channel access ($P_{CCA_DL_2}$)			1	0.75	0.75
UL CCA probability (P_{CCA_UL})			1	1	1
EPRE ratio of PSS to SSS		dB	1	0	0
EPRE ratio of PBCH DMRS to SSS					

EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	dBm/30 KHz	1	-95	-95
$\hat{E}_s / I_{ot}$		1	3	3
$\hat{E}_s / N_{oc}$		1	3	3
SS-RSRP Note3	dBm/30 kHz	1	-92	-92
Io Note3	dBm/38.1MHz	1	-59.2	-59.2
Propagation condition		1	AWGN	
SRS Config		1	SRSConf.1 Note6	SRSConf.2 Note6

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: DRX related parameters are given in Table A.3.3.8-1
Note 6: SRS configs are given in Table A.11.3.1.1.1-3
Note 7: Parameters P_{CCA_DL}, $P_{CCA_DL_1}$, $P_{CCA_DL_2}$ and P_{CCA_UL} are defined in clause A.3.26.2.
Note 8: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

Table A.11.3.1.1.1-3: SRS Configuration for UE transmit timing test

	Field	SRSConf.1	SRSConf.2	Comments
SRS-ResourceSet	srs-ResourceSetId	0	0	
	srs-ResourceIdList	0	0	
	resourceType	Periodic	Periodic	
	Usage	Codebook	Codebook	
SRS-Resource	SRS-ResourceId	0	0	
	nrofSRS-Ports	Port1	Port1	
	transmissionComb	n2	n2	
	combOffset-n2	0	0	
	cyclicShift-n2	0	0	
	resourceMapping startPosition	0	0	
	resourceMapping nrofSymbols	n1	n1	
	resourceMapping repetitionFactor	n1	n1	
	freqDomainPosition	0	0	
	freqDomainShift	0	0	
	freqHopping c-SRS	14 for test configuration 1,2 25 for test configuration 3	25	Matches $N_{RB,c}$
	freqHopping b-SRS	0	0	

	freqHopping b-hop	0	0	
	groupOrSequenceHopping	Neither	Neither	
	resourceType	Periodic	Periodic	
	periodicityAndOffset-p	sl1, 0	sl640, 0	Offset to align with DRX periodicity
	sequenceId	0	0	Any 10 bit number

A.11.3.1.1.2 Test requirements

The test sequence shall be carried out in RRC_CONNECTED for every test case.

Following will be the test sequence for this test

1) Setup NR PCell according to parameters given in Table A.11.3.1.1.1-1.
2) After connection set up with the cell, the test equipment will verify that the timing of the NR cell is within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first detected path of DL SSB.
   a. The N_{TA} offset value (in T_c units) is 25600
   b. The T_e values depend on the DL and UL SCS for which the test is being run and are given in Table 7.1.2-1
3) The test system shall adjust the timing of the DL path by values given in Table A.11.3.1.1.2-1

Table A.11.3.1.1.2-1: Adjustment Value for DL Timing

SCS of SSB signals (KHz)	Adjustment Value	
	Test1	Test2
30	$+32*64T_c$	$+16*64T_c$

4) The test system shall verify that the adjustment step size and the adjustment rate shall be according to requirements specified in clause 7.1.2 Table 7.1.2.1-1 until the UE transmit timing offset is within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ respective to the first detected path (in time) of DL SSB. Skip this step for test 2 with DRX configured.
5) The test system shall verify that the UE transmit timing offset stays within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first detected path of DL SSB. For Test 2 the UE transmit timing offset shall be verified for the first transmission in the DRX cycle immediately after DL timing adjustment

A.11.3.2 UE timing advance

A.11.3.2.1 UE Timing Advance Adjustment Accuracy with PCell under DL CCA

A.11.3.2.1.1 Test Purpose and Environment

The purpose of the test is to verify UE Timing Advance adjustment delay and accuracy requirement defined in clause 7.3.

A.11.3.2.1.2 Test Parameters

Supported test configurations are shown in table A.11.3.2.1.2-1. Both timing advance adjustment delay and accuracy are tested by using the parameters in table A.11.3.2.1.2-2, A.11.3.2.1.2-3 and A.11.3.2.1.2-4.

In all test cases, single cell is used. Each test consists of two successive time periods, with time duration of T1 and T2 respectively. In each time period, timing advance commands are sent to the UE and Sounding Reference Signals

(SRS), as specified in table A.11.3.2.1.2-3, are sent from the UE and received by the test equipment. By measuring the reception of the SRS, the transmit timing, and hence the timing advance adjustment accuracy, can be measured.

During time period T1, the test equipment shall send one message with a Timing Advance Command MAC Control Element, as specified in Clause 6.1.3.4 in TS 38.321 [7]. The Timing Advance Command value shall be set to 31, which according to Clause 4.2 in TS 38.213 [3] results in zero adjustment of the Timing Advance. In this way, a reference value for the timing advance used by the UE is established.

During time period T2, the test equipment shall send a sequence of messages with Timing Advance Command MAC Control Elements, with Timing Advance Command value specified in table A.11.3.2.1.2-2. This value shall result in changes of the timing advance used by the UE, and the accuracy of the change shall then be measured, using the SRS sent from the UE.

As specified in Clause 7.3.2.1, the UE adjusts its uplink timing at slot n+k for a timing advance command received in slot n. This delay must be taken into account when measuring the timing advance adjustment accuracy, via the SRS sent from the UE.

The UE Time Alignment Timer, described in Clause 5.2 in TS 38.321 [7], shall be configured so that it does not expire in the duration of the test.

Table A.11.3.2.1.2-1: Supported test configuration for timing advance test

Config	Description
1	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE supporting SA operation only on NR band(s) with shared spectrum access is required to be tested	

Table A.11.3.2.1.2-2: General test parameters for timing advance test

Parameter	Unit	Value	Comment
RF channel number		1	
Initial DL BWP		DLBWP.0.1	As specified in Table A.3.9.2.1-1
Dedicated DL BWP		DLBWP.1.1	As specified in Table A.3.9.2.2-1
Initial UL BWP		ULBWP.0.1	As specified in Table A.3.9.3.1-1
Dedicated UL BWP		ULBWP.1.1	As specified in Table A.3.9.3.2-1
Timing Advance Command (T_A) value during T1		31	$N_{TA_new} = N_{TA_old}$ for the purpose of establishing a reference value from which the timing advance adjustment accuracy can be measured during T2
Timing Advance Command (T_A) value during T2		39	For 30 kHz SCS $N_{TA_new} = N_{TA_old} + 4096*T_c$ (based on equation in clause 4.2 of TS 38.213 [3])
T1	s	5	
T2	s	5	

Table A.11.3.2.1.2-3: Cell specific test parameters for timing advance test

Parameter		Unit	Test1	
			T1	T2
TDD configuration	Config 1		TDDConf.1.1 CCA	
$BW_{channel}$	Config 1	MHz	40: $N_{RB,c}$ = 106	
BWP BW	Config 1	MHz	40: $N_{RB,c}$ = 106	
DRX Cycle	Config 1	ms	Not Applicable	
DL CCA model	Config 1		As specified in clause A.3.26.2.1	
UL CCA model	Config 1		As specified in clause A.3.26.2.2	
PDSCH Reference measurement channel	Config 1		SR.1.1 CCA	

CORESET Reference Channel		Config 1		CR.1.1 CCA
TRS configuration		Config 1		TRS.1.2 TDD
OCNG Patterns		Config 1		OCNG pattern 1
SMTC configuration		Config 1		SMTC.1 FR1
SSB configuration	Semi-static channel acces	Config 1		SSB.1 CCA
	Dymamic channel acces	Config 1		SSB.2 CCA
DL CCA probability for semi-static channel access (P_{CCA_DL})		Config 1		1
DL CCA model probability for dynamic static channel access ($P_{CCA_DL_1}$)		Config 1		1
DL CCA model probability for dynamic static channel access ($P_{CCA_DL_2}$)		Config 1		1
UL CCA probability P_{CCA}		Config 1		1
EPRE ratio of PSS to SSS			dB	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2		Config 1	dBm/30 kHz	-95
$\hat{E}_s / I_{ot}$			dB	3
$\hat{E}_s / N_{oc}$			dB	3
Io Note3		Config 1	dBm/ 38.16MHz	-62.58
Propagation condition			-	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Parameters P_{CCA_DL}, $P_{CCA_DL_1}$, $P_{CCA_DL_2}$ and P_{CCA_UL} are defined in clause A.3.26.2.

Note 5: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

Table A.11.3.2.1.2-4: Sounding Reference Symbol Configuration for Timing Advance Accuracy Test

Field	Value	Comment
c-SRS	24	Frequency hopping is disabled

b-SRS	0	
b-hop	0	
freqDomainPosition	0	Frequency domain position of SRS
freqDomainShift	0	
groupOrSequenceHopping	neither	No group or sequence hopping
SRS-PeriodicityAndOffset	sl5=4 for SCS 30kHz	Once every 5 slots
pathlossReferenceRS	ssb-Index=0	SSB #0 is used for SRS path loss estimation
usage	Codebook	Codebook based UL transmission
startPosition	0	resourceMapping setting: SRS on last symbol of slot, and 1symbols for SRS without repetition.
nrofSymbols	n1	
repetitionFactor	n1	
combOffset-n2	0	transmissionComb setting
cyclicShift-n2	0	
nrofSRS-Ports	port1	Number of antenna ports used for SRS transmission
Note: For further information see clause 6.3.2 in TS 38.331 [2].		

A.11.3.2.1.3 Test Requirements

The UE shall apply the signalled Timing Advance value to the transmission timing at the designated activation time i.e. *k+1* slots after the reception of the timing advance command, where k=5.

The Timing Advance adjustment accuracy shall be within the limits specified in clause 7.3.2.2.

The rate of correct Timing Advance adjustments observed during repeated tests shall be at least 90%.

A.11.4 Signalling characteristics

A.11.4.1 Radio link monitoring

A.11.4.1.1 Introduction

In the test cases specified in clause A.11.4.1, any uplink signal transmitted by the UE is used for detecting the in-/out-of-sync state of the UE. In terms of measurement, the uplink signal is verified based on the UE output power:

- UE output power higher than Transmit OFF power -50 dBm (as defined in TS 38.101-1 [18]) means uplink signal.
- UE output power equal to or less than Transmit OFF power -50 dBm (as defined in TS 38.101-1 [18]) means no uplink signal.

For intra-band contiguous carrier aggregation, transmit OFF power is measured as the mean power per component carrier.

For UE with multiple transmit antennas, transmit OFF power is measured as the mean power at each transmit connector.

A.11.4.1.2 Radio link monitoring out-of-sync test for PCell configured with SSB-based RLM RS in non-DRX mode

A.11.4.1.2.1 Test purpose and environment

The purpose of this test is to verify that the UE properly detects the out-of-sync and in-sync for the purpose of monitoring downlink radio link quality of the PCell. This test will partly verify the FR1 PCell radio link monitoring requirements in clause 8.1A.

In the test, UE is configured to perform RLM based on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to '*rlf*'. Supported test configurations are shown in table A.11.4.1.2.1-1. The test parameters are given in Tables A.11.4.1.2.1-2, A.11.4.1.2.1-3, and A.11.4.1.2.1-4 below. There is one cell (Cell 1), which is the active NR cell in FR1, in the test. Cell 1 operates on a carrier frequency with CCA and transmits SSBs in DBT windows according to DL CCA model.

The test consists of three successive time periods, with time duration of T1, T2 and T3, respectively. Figure A.11.4.1.2.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. The UE transmits according to UL CCA model. The UE is configured to perform inter-frequency measurements using Gap Pattern ID #0 (40 ms) in the test.

Table A.11.4.1.2.1-1: Supported test configurations.

Configuration	Description
1	TDD, SSB SCS 30 kHz, data SCS 30 kHz, bandwidth 40 MHz

Table A.11.4.1.2.1-2: General test parameters for PCell out-of-sync testing in non-DRX mode.

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
DL CCA model			As specified in clause A.3.26.2.1
UL CCA model			As specified in clause A.3.26.2.2
Duplex mode	Config 1		TDD
$BW_{channel}$	Config 1	MHz	40: $N_{RB,c}$ = 106
DL initial BWP configuration	Config 1		DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.1
UL initial BWP configuration	Config 1		ULBWP.0.1
UL dedicated BWP configuration	Config 1		ULBWP.1.1
TDD configuration	Config 1		TDDConf.1.1 CCA
CORESET Reference Channel	Config 1		CR.1.1 CCA
SSB configuration for semi-static channel access Note 3, 5	Config 1		SSB.1 CCA
SSB configuration for dynamic channel access Note 4, 5	Config 1		SSB.2 CCA
DBT window configuration	Config 1		DBT.1

PDSCH/PDCCH subcarrier spacing	Config 1		30 kHz
PRACH Configuration	Config 1		FR1 PRACH configuration 1 under CCA
SSB index assigned as RLM RS			0
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			OFF
Gap pattern ID			gp0
Layer 3 filtering			Enabled
T310 timer		ms	0
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1		TRS.1.2 TDD
T1		s	0.2
T2		s	1.04
T3		s	1.04
D1		s	1

Note 1: All configurations are assigned to the UE prior to the start of time period T1.
Note 2: UE-specific PDCCH is not transmitted after T1 starts.
Note 4: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 5: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 6: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

Table A.11.4.1.2.1-3: Cell-specific test parameters for PCell out-of-sync testing in non-DRX mode.

Parameter		Unit	Test 1					
			T1	T2	T3			
DL CCA probability P_{CCA_DL}	Note 6,8		P_{CCA_DL}=0.9375					
	Note 7,8		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75					
UL CCA probability P_{CCA_UL}			1					
EPRE ratio of PDCCH DMRS to SSS		dB	4					
EPRE ratio of PDCCH to PDCCH DMRS		dB	0					
EPRE ratio of PBCH DMRS to SSS		dB	0					
EPRE ratio of PBCH to PBCH DMRS		dB						

EPRE ratio of PSS to SSS		dB						
EPRE ratio of PDSCH DMRS to SSS		dB						
EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
SNR[Note 3,4] on RLM-RS	Config 1	dB	1	-7	-15			
SNR on other channels and signals	Config 1	dB	1					
N_{oc}	Config 1	dBm/ SCS	-95					
Propagation condition			TDL-C 300 ns 100 Hz					

NOTE 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in slots with RMC burst transmission and is not transmitted during muted slots or during DBT windows.
NOTE 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
NOTE 3: SNR levels correspond to the signal to noise ratio over the transmitted SSS REs during DBT windows.
NOTE 4: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3, respectively, in Figure A.10.4.1.2.1-1.
NOTE 5: The SNR values are specified for testing a UE which supports 2 RX on at least one band. For testing of a UE which supports 4 RX on all bands, the SNR during T3 is A.3.6.
NOTE 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
NOTE 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
NOTE 8: For UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

Table A.11.4.1.2.1-4: Measurement gap configuration for PCell out-of-sync testing in non-DRX mode.

Field	Test 1	
	Value	
gapOffset	0	
NOTE: Ensure that RLM RS is partially overlapped with measurement gap0		

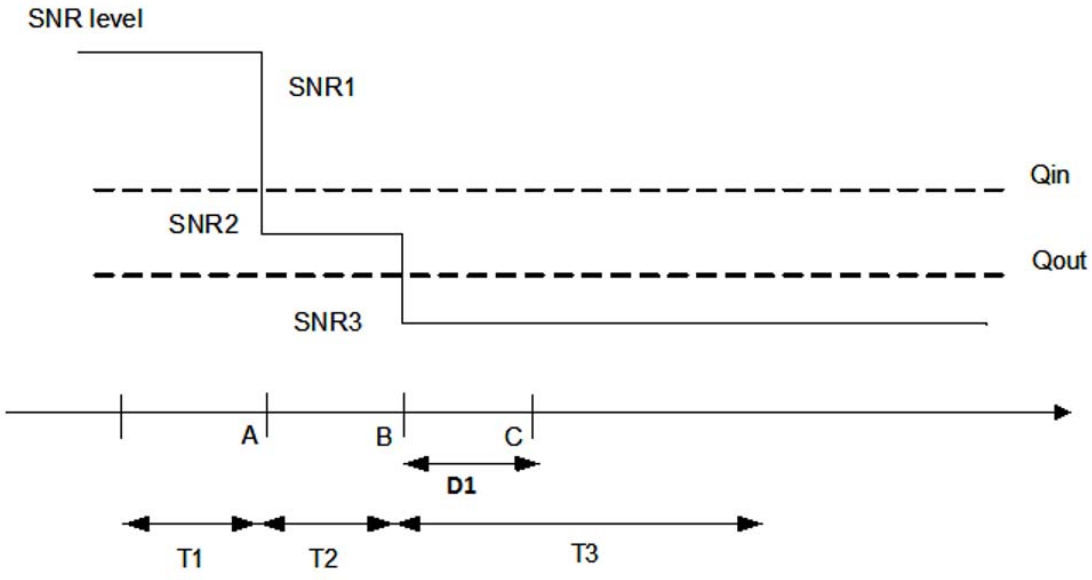

Figure A.11.4.1.2.1-1: SNR variation for out-of-sync testing.

A.11.4.1.2.2 Test requirements

The UE behaviour in each test during time durations T1, T2 and T3 shall be as follows:

- During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.
- The UE shall stop transmitting uplink signal no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

A.11.4.1.3 Radio link monitoring in-sync test for PCell configured with SSB-based RLM RS in non-DRX mode

A.11.4.1.3.1 Test purpose and environment

The purpose of this test is to verify that the UE properly detects the out-of-sync and in-sync for the purpose of monitoring downlink radio link quality of the PCell. This test will partly verify the FR1 PCell radio link monitoring requirements in clause 8.1A.

In the test, UE is configured to perform RLM based on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to '*rlf*'. Supported test configurations are shown in table A.11.4.1.3.1-1. The test parameters are given in Tables A.11.4.1.3.1-2, and A.11.4.1.3.1-3 below. There is one cell (Cell 1), which is the active NR cell in FR1, in the test. Cell 1 operates on a carrier frequency with CCA and transmits SSBs in DBT windows according to DL CCA model.

The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5, respectively. Figure A.11.4.1.3.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states.

Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. The UE transmits according to UL CCA model.

Table A.11.4.1.3.1-1: Supported test configurations.

Configuration	Description
1	NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz

Table A.11.4.1.3.1-2: General test parameters for PCell in-sync testing in non-DRX mode.

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
DL CCA model			As specified in clause A.3.26.2.1
UL CCA model			As specified in clause A.3.26.2.2
Duplex mode	Config 1		TDD
$BW_{channel}$	Config 1	MHz	40: $N_{RB,c}$ = 106
DL initial BWP configuration	Config 1		DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.1
UL initial BWP configuration	Config 1		ULBWP.0.1
UL dedicated BWP configuration	Config 1		ULBWP.1.1
TDD Configuration	Config 1		TDDConf.1.1 CCA
CORESET Reference Channel	Config 1		CR.1.1 CCA
SSB configuration for semi-static channel access Note 3, 5	Config 1		SSB.1 CCA
SSB configuration for dynamic channel access Note 4,5	Config 1		SSB.2 CCA
DBT window configuration	Config 1		DBT.1
PDSCH/PDCCH subcarrier spacing	Config 1		30 kHz
PRACH Configuration	Config 1		FR1 PRACH configuration 1 under CCA
SSB index assigned as RLM RS			0
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4

	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			OFF
Gap pattern ID			N/A
Layer 3 filtering			Enabled
T310 timer		ms	2000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1		TRS.1.2 TDD
T1		s	0.2
T2		s	0.2
T3		s	0.52
T4		s	0.2
T5		s	2.04
D1		s	2
NOTE 1: All configurations are assigned to the UE prior to the start of time period T1. NOTE 2: UE-specific PDCCH is not transmitted after T1 starts. NOTE 4: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. NOTE 5: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. NOTE 6: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.			

Table A.11.4.1.3.1-3: Cell-specific test parameters for PCell in-sync testing in non-DRX mode.

Parameter	Unit	Test 1

			T1	T2	T3	T4	T5
DL CCA probability P_{CCA_DL}	Note 6,8		P_{CCA_DL}=0.9375				
	Note 7,8		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75				
UL CCA probability P_{CCA_UL}			1				
L_{CCA_DL}			7				
W_{CCA_DL}		ms	$T_{Evaluate_in_SSB,CCA}$ NOTE 9				
EPRE ratio of PDCCH DMRS to SSS		dB	4				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0				
EPRE ratio of PBCH DMRS to SSS		dB	0				
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1	dB	1	-7	-15	-4.5	1
SNR on other channels and signals	Config 1	dB	1				
N_{oc}	Config 1	dBm/ SCS	-95				
Propagation condition			TDL-C 300ns 100Hz				

NOTE 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in slots with RMC burst transmission and is not transmitted during muted slots or during DBT windows.
NOTE 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
NOTE 3: SNR levels correspond to the signal to noise ratio over the transmitted SSS REs during DBT windows.
NOTE 4: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in Figure A.11.4.1.3.1-1.
NOTE 5: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4 RX on all bands, the SNR during T3 and T4 is modified as specified in clause A.3.6.
NOTE 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
NOTE 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
NOTE 8: For UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.
NOTE 9: As defined in Table 8.1A.2.2-1.

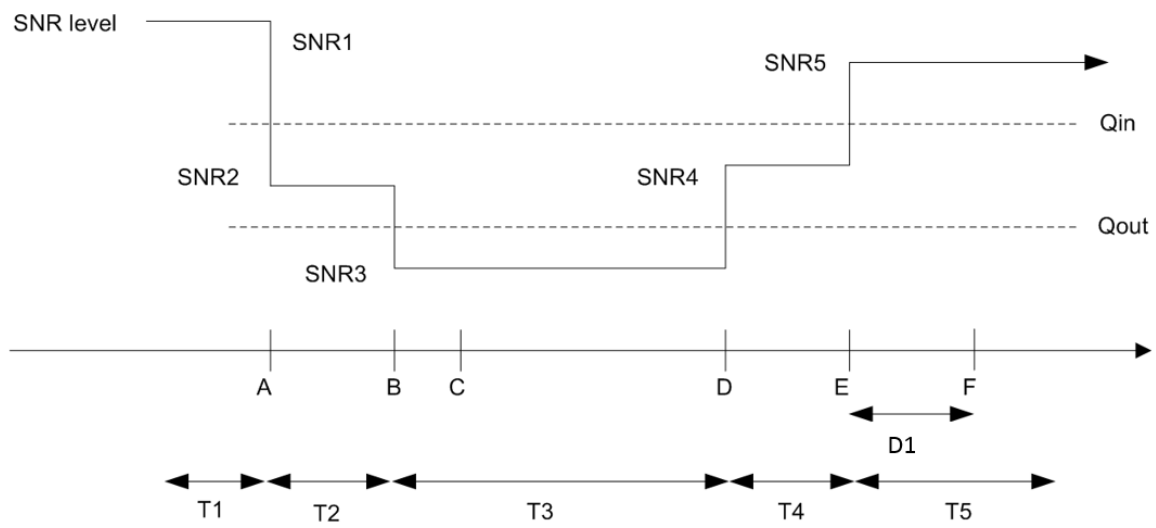

Figure A.11.4.1.3.1-1: SNR variation for in-sync testing.

A.11.4.1.3.2 Test requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

- During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90%.

A.11.4.1.4 Void

A.11.4.1.4.1 Void

A.11.4.1.4.2 Void

A.11.4.1.5 Void

A.11.4.1.5.1 Void

A.11.4.1.5.2 Void

A.11.4.2 Interruption

A.11.4.2.1 NR interruptions during Scell operations with CCA on PCell and SCell

A.11.4.2.1.1 Test Purpose and Environment

The purpose of this test is to verify NR PCell interruptions during Scell operations on an NR SCC with CCA. This test will verify the interruption requirements for NR PCell in NR SA specified in TS 38.133 clause 8.2.2 and 8.3A. Supported test configurations are shown in table A.11.4.2.1.1-1.

The general test parameters and NR cell specific test parameters are given in Table A.11.4.2.1.1-2 and A.11.4.2.1.1-3 below. In the test there are two cells: Cell1 and Cell2. Cell1 and Cell2 are PCell and SCell. Both of cell 1 and cell 2 are subject to CCA. The test consists of five time periods, with duration of T1, T2, T3, T4 and T5. Prior to the start of the time duration T1, the UE is connected to Cell1 and Cell2. Throughout the test, the PCell are continuously scheduled in DL. The power of signals on cell 1 and 2 is not modified during the test.

Prior to T1, a connection is started with cell 1 as the PCell, and measurements of cell 2 are configured with gap pattern 0, such that cell 2 is reported. This ensures that cell 2 is known at the start of time period T1 and is not itself part of the tested requirement.

The point in time at which the RRC message implying Scell addition is received at the UE antenna connector, defines the start of time period T1. Measurement gap pattern 0 shall be stopped when the Scell is configured.

The point in time at which the MAC-CE message implying Scell activation is received at the UE antenna connector, defines the start of time period T2.

The point in time at which the MAC-CE message implying Scell deactivation is received at the UE antenna connector, defines the start of time period T3.

The point in time at which deactivation delay requirement in section 8.3A are satisfied defines the start of time period T4

The point in time at which the RRC message implying Scell release is received at the UE antenna connector, defines the start of time period T5.

Table A.11.4.2.1.1-1: Interruptions during measurements on deactivated NR SCC supported test configurations

Config	Description
1	With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Table A.11.4.2.1.1-2: General test parameters for Interruptions during measurements on deactivated NR SCC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2	
Active PCell		Cell1	PCell on RF channel number 1.
Configured SCell		Cell2	Deactivated SCell on NR RF channel number 2.
CP length		Normal	Applicable to Cell1, Cell2
DRX		OFF	
Measurement gap pattern Id		OFF	
SCell measurement cycle (measCycleSCell)	ms	160	

T1	s	<10	
T2	s	<10	
T3	s	<10	
T4	s	<10	
T5	s	<10	

Table A.11.4.2.1.1-3: NR cell specific test parameters for Interruptions during measurements on deactivated NR SCC

Parameter		Unit	Cell1					Cell2				
			T1	T2	T3	T4	T5	T1	T2	T3	T4	T5
TDD configuration	Config 1		TDDConf.1.1 CCA					TDDConf.1.1 CCA				
$BW_{channel}$	Config 1	MHz	40: $N_{RB,c}$ = 106					40: $N_{RB,c}$ = 106				
DL CCA model	Config 1		As specified in clause A.3.20.2.1					As specified in clause A.3.20.2.1				
DL CCA probability for semi-static channel access[Note6,8]	P_{CCA_DL}		0.9375					0.9375				
DL CCA probability for dynamic channel access[Note7,8]	$P_{CCA_DL_1}$		0.75					0.75				
	$P_{CCA_DL_2}$		0.75					0.75				
UL CCA model	Config 1		As specified in clause A.3.20.2.2					---				
UL CCA probability for semi-static channel access	P_{CCA_UL}		0.87					---				
UL CCA probability for dynamic channel access	P_{CCA_UL}		0.75					---				
Initial BWP Configuration	Config 1		DLBWP.0.1					DLBWP.0.1				
Dedicated DL BWP Configuration	Config 1		DLBWP.1.1					DLBWP.1.1				
Initial UL BWP Configuration	Config 1		ULBWP.0.1					ULBWP.0.1				
Dedicated UL BWP Configuration	Config 1		ULBWP.1.1					ULBWP.1.1				
PDSCH reference meassurement channel	Config 1		SR.1.1 CCA					---				
RMSI CORESET parameters	Config 1		CR.1.1 CCA					CR.1.1 CCA				
PDCCH CORESET parameters	Config 1		CCR.1.1 CCA					CCR.1.1 CCA				
TRS configuration	Config 1		TRS.1.2 TDD					TRS.1.2 TDD				
OCNG Patterns			OP.1					OP.1				
SSB configuration for semi-static channel access[Note6,8]	Config 1		SSB.1 CCA					SSB.1 CCA				
SSB configuration for dynamic channel access[Note7,8]	Config 1		SSB.2 CCA					SSB.2 CCA				
SMTC Configuration	Config 1		SMTC.1					SMTC.1				
DBT window configuration	Config 1		DBT.1					DBT.1				
TCI state			TCI.State.0					TCI.State.0				
Correlation Matrix and Antenna Configuration			1x2 Low					1x2 Low				
EPRE ratio of PSS to SSS		dB	0					0				
EPRE ratio of PBCH DMRS to SSS												
EPRE ratio of PBCH to PBCH DMRS												
EPRE ratio of PDCCH DMRS to SSS												
EPRE ratio of PDCCH to PDCCH DMRS												
EPRE ratio of PDSCH DMRS to SSS												
EPRE ratio of PDSCH to PDSCH												
EPRE ratio of OCNG DMRS to SSS(Note 1)												

EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note 2		dBm/15 kHz	-104	-104
SS-RSRP Note 3		dBm/15 kHz	-87	-87
$\hat{E}_s/I_{ot}$		dB	17	17
$\hat{E}_s/N_{oc}$		dB	17	17
Io Note3	Config 1	dBm/38.16MHz	-52.86	-52.86
Time offset to Cell1 Note 4		ms	3	3
Time offset to Cell2 Note 5		µs	-	3
Propagation Condition			AWGN	AWGN

Note 1: OCNG shall be used such that resources in the cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols in slots with downlink transmission bursts. OCNG is not transmitted during muted slots or during DBT windows.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modeled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselvess.
Note 4: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell at the UE antenna connector including time alignment error between the two cells
Note 5: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.
Note 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 8: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

A.11.4.2.1.2 Test Requirements

The UE shall meet the interruption requirements for Scell addition on the victim Pcell in clause 8.2.1 during time T1

The UE shall meet the interruption requirements for Scell activation on the victim Pcell in clause 8.2.1during time T2. There shall be a single interruption with time window as specified in clause 8.3A.2

The UE shall meet the interruption requirements for Scell deactivation on the victim PCell in clause 8.2.1during time T3. There shall be a single interruption with time window as specified in clause 8.3A.3

The UE shall meet the interruption requirements for deactivated Scell measurements on the victim PCell in clause 8.2.1 during time T4. The interruptions shall be within the time window as specified in clause 8.3A.3

The UE shall meet the interruption requirements for Scell release on the victim PCell in clause 8.2.1 during time T5.

The rate of correct events observed during repeated tests shall be at least 90%.

A.11.4.3 SCell activation and deactivation delay

A.11.4.3.1 SCell Activation and Deactivation of known SCell with PCell and SCell under CCA, 160 ms SCell measurement cycle

A.11.4.3.1.1 Test Purpose and Environment

The purpose of this test is to verify that SCell activation and deactivation delays for SCell, with PCell and SCell both under CCA, are within the requirements stated in clause 8.3A, when the SCell is known by the UE at the time of activation and the configured SCell measurement cycle is 160 ms.

The supported test configurations are shown in Table A.11.4.3.1.1-1.

The test parameters are given in Table A.11.4.3.1.1-2 and cell-specific parameters in Table A.11.4.3.1.1-3 below. The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are two carriers, each with one cell: Cell 1 (PCell) on radio channel 1 (PCC) in NR with CCA, and Cell2 (SCell) on radio channel 2 (SCC) in NR with CCA. Before the test starts the UE is connected to Cell 1, but is not aware of Cell 2, as the UE is only monitoring the PCC. The UE shall be continuously scheduled in the PCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 2) becomes configured on radio channel 2. The UE now starts monitoring the SCC. At the end of T1, the test equipment sends a MAC message for activation of the SCell.

The point in time at which the MAC message is received at the UE antenna connector, in a slot # denoted *m*, defines the start of time period T2. The UE shall be able to report a valid CSI in PCell for the activated SCell at latest in slot $m + (T_{HARQ}+T_{activation_time_withCCA} + T_{CSI_Reporting_withCCA})$/NR_slot_length, as defined in clause 8.3A.2. The UE shall start reporting CSI in PCell in first available uplink resource for CSI reporting after at least one CSI-RS transmission occasion for channel measurement and reporting following slot $m+ \frac{T_{\mathrm{HARQ}}+3\mathrm{ms}}{\mathrm{NR\ slot\ length}}$ and shall report CQI index 0 (out-of-range) until the SCell activation has been completed. Any PCell interruption shall fall within the time window specified in clause 8.3.2.

The point in time at which the MAC message is received by at the UE antenna connector, in a slot # denoted *n*, defines the start of time period T3. The UE shall complete the activation at latest in slot $n + \frac{T_{\mathrm{HARQ}}+3\mathrm{ms}}{\mathrm{NR\ slot\ length}}$. Any PCell interruption shall fall within the time window specified in clause 8.3A.3.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell during activation and deactivation of SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received, while taking into account CCA failures on SCC.

The test equipment verifies the deactivation time by counting the slots from the time when the SCell deactivation command is sent until CQI reporting for SCell is discontinued.

Table A.11.4.3.1.1-1: Supported test configurations for SCell Activation and Deactivation of known SCell with PCell and SCell under CCA, 160 ms SCell measurement cycle

Configuration	Description
1	With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode; With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Table A.11.4.3.1.1-2: General test parameters for known SCell activation with PCell and SCell under CCA, 160 ms SCell measurement cycle

Parameter	Unit	Value	Comment
RF Channel Number		1,2	Two radio channels (1, 2) are used for this test
Active PCell		Cell 1	Primary cell on NR RF channel number 1.
Configured deactivated SCell		Cell 2	Configured deactivated secondary cell on NR RF channel number 2
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
CQI/PMI periodicity and offset configuration index		0	CQI reporting for SCell every second subframe
SCell measurement cycle (measCycleSCell)	ms	160	
Cell2 timing offset to cell1	µs	0	
Time alignment error between cell2 and cell1	µs	≤ TAE as specified in TS 38.104 [13] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.

T1	s	7	During this time the PCell shall be known and the SCell configured and detected.
T2	s	1	During this time the UE shall activate the SCell.
T3	s	1	During this time the UE shall deactivate the SCell.
T_{HARQ}	ms	k_1×NR slot length	k_1 is a number of slots and is indicated by the PDSCH-to-HARQ-timing-indicator field in the DCI format, if present, or provided by *dl-DataToUL-ACK*, the value of k should be the minimum value defined in TS 38.213 [3] depends on UE's capability
$T_{CSI_Reporting}$	ms	$10 + 5 \cdot 2^{\mu_{DL}}$	The delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting (clause 5.2.2.5 in TS 38.214) and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2] μ_{DL} is the subcarrier spacing configuration for DL

Table A.11.4.3.1.1-3: Cell specific test parameters for known SCell activation case with PCell and SCell under CCA, 160 ms SCell measurement cycle

Parameter		Unit	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Duplex mode	Config 1		TDD			TDD		
TDD configuration	Config 1		TDDConf.1.1 CCA			TDDConf.1.1 CCA		
$BW_{channel}$	Config 1	MHz	40: $N_{RB,c}$ = 106			40: $N_{RB,c}$ = 106		
DL CCA model			As specified in clause A.3.26.2.1			As specified in clause A.3.26.2.1		
UL CCA model			As specified in clause A.3.26.2.2			As specified in clause A.3.26.2.2		
DL CCA probability for semi-static channel access Note5,7	P_{CCA_DL}		0.9375			0.9375		
DL CCA probability for dynamic channel access Note6,7	$P_{CCA_DL_1}$		0.75			0.75		
	$P_{CCA_DL_2}$		0.75			0.75		
UL CCA probability for semi-static channel access	P_{CCA_UL}		0.87			0.87		
UL CCA probability	P_{CCA_UL}		0.75			0.75		
L_{CCA_DL} Note 8			2			2		
W_{CCA_DL} Note 8		ms	$T_{activation_time_withCCA}$			$T_{activation_time_withCCA}$		
Initial downlink BWP configuration			DLBWP.0.2			DLBWP.0.2		
Initial uplink BWP configuration			ULBWP.0.1			ULBWP.0.1		
Dedicated downlink BWP configuration			DLBWP.0.2			DLBWP.0.2		
Dedicated uplink BWP configuration			ULBWP.0.1			ULBWP.0.1		
TCI state			TCI.State.0			TCI.State.0		
TRS Configuration	Config 1		TRS.1.2 TDD			TRS.1.2 TDD		
PDSCH Reference measurement channel	Config 1		SR.1.1 CCA			SR.1.1 CCA		
Dedicated CORESET parameters	Config 1		CCR.1.3 CCA			SR.1.1 CCA		
RMSI CORESET parameters	Config 1		CR.1.1 CCA			SR.1.1 CCA		
OCNG Patterns Note1			OP.1			OP.1		

SSB Configuration for semi-static channel access Note5,7	Config 1		SSB.1 CCA	SSB.1 CCA
SSB Configuration for dynamic channel access Note6,7	Config 1		SSB.2 CCA	SSB.2 CCA
SMTC configuration			SMTC.1	SMTC.1
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS Note1				
EPRE ratio of OCNG to OCNG DMRS Note1				
N_{oc} Note2	Config 1	dBm/15kHz	-104	-104
N_{oc} Note2	Config 1	dBm/SCS	-101	-101
$\hat{E}_s/I_{ot}$		dB	17	17
$\hat{E}_s/N_{oc}$		dB	17	17
SS-RSRP Note3	Config 1	dBm/SCS	-84	-84
Io Note3	Config 1	dBm/ 38.16MHz	-52.87	-52.87
Propagation condition		-	AWGN	

Note 1: OCNG shall be used such that resources in the cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols in slots with downlink transmission bursts. OCNG is not transmitted during muted slots or during DBT windows.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.
Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 7: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.
Note 8: As specified in clause 8.3A for $L_{1,max}$, $L_{2,1,max}$, $L_{2,2,max}$, $L_{3,1,max}$, and $L_{3,2,max}$

A.11.4.3.1.2 Test Requirements

During T2, starting after at least one CSI-RS transmission occasion for channel measurement and reporting from the slot specified in clause 4.3 of TS 38.213 [3] and until the UE has completed the SCell activation, the UE shall report out of range if the UE has available uplink resources to report CQI for the SCell.

During T2, the UE shall send the first valid CSI report (non-zero CQI) for the SCell in first available uplink resource for CSI reporting no later than slot m + (T_{HARQ}+$T_{activation_time_withCCA}$ + $T_{CSI_Reporting_withCCA}$)/NR_slot_length, where $T_{activation_time_withCCA} = T_{FirstSSB} + L_1*T_{rs}$ + 5ms, as specified in clause 8.3A.2.

During T3, the UE shall stop sending CSI reports for SCell at latest in slot $n + \frac{T_{HARQ}+3ms}{NR\ slot\ length}$, as defined in clause 8.3A.3.

During T2, interruption on PCell shall not occur outside slot m +1+$\frac{T_{HARQ}}{NR\ slot\ length}$ to slot m +1+$\frac{T_{HARQ}+3+T_X}{NR\ slot\ length}$ with $T_X = T_{FirstSSB}$.

During T3, interruption on PCell shall not occur outside slot n +1+T_{HARQ}/NR_slot_length to slot n+1+(T_{HARQ} +3ms)/NR_slot_length.

The interruption on PCell shall not be more than specified for SA in clause 8.2.2.2.2.

The rate of correctly observed SCell activation delays and SCell deactivation delays shall for repeated tests be at least 90%.

A.11.4.3.2 SCell Activation and Deactivation of known SCell with PCell and SCell under CCA, 640 ms SCell measurement cycle

A.11.4.3.2.1 Test Purpose and Environment

The purpose of this test is to verify that SCell activation and deactivation delays for SCell, with PCell and SCell under CCA, are within the requirements stated in clause 8.3A, when the SCell is known by the UE at the time of activation and the configured SCell measurement cycle is 640 ms.

The supported test configurations are same as in Table A.11.4.3.1.1-1 above.

The test parameters are same as in Table A.11.4.3.1.1-2 above, except for parameters listed below in Table A.11.4.3.2.1-1. The cell-specific parameters are same as in Table A.11.4.3.1.1-3 above.

The test execution is the same as described in clause A.11.4.3.1 above.

Table A.11.4.3.2.1-1: General test parameters for known SCell activation with PCell and SCell under CCA, 640 ms SCell measurement cycle

Parameter	Unit	Value	Comment
SCell measurement cycle (measCycleSCell)	ms	640	

A.11.4.3.2.2 Test Requirements

During T2, starting after at least one CSI-RS transmission occasion for channel measurement and reporting from the slot specified in clause 4.3 of TS 38.213 [3] and until the UE has completed the SCell activation, the UE shall report out of range if the UE has available uplink resources to report CQI for the SCell.

During T2, the UE shall send the first valid CSI report (non-zero CQI) for the SCell in first available uplink resource for CSI reporting no later than slot m + (T_{HARQ}+$T_{activation_time_withCCA}$ + $T_{CSI_Reporting_withCCA}$)/NR_slot_length, where $T_{activation_time_withCCA} = T_{FirstSSB_MAX} + L_{2,1}*T_{SMTC_MAX} + (1 + L_{2,2})*T_{rs}$ + 5ms, as specified in clause 8.3A.2.

During T3, the UE shall stop sending CSI reports for SCell at latest in slot $n + \frac{T_{HARQ} + 3ms}{NR\ slot\ length}$, as defined in clause 8.3A.3.

During T2, interruption on PCell shall not occur outside slot m +1+$\frac{T_{HARQ}}{NR\ slot\ length}$ to slot m +1+$\frac{T_{HARQ}+3+T_X}{NR\ slot\ length}$ with $T_X = T_{FirstSSB_MAX} + L_{2,1}* T_{SMTC_MAX}$.

During T3, interruption on PCell shall not occur outside slot n +1+T_{HARQ}/NR_slot_length to slot n+1+(T_{HARQ} +3ms)/NR_slot_length.

The interruption on PCell shall not be more than specified for SA in clause 8.2.2.2.2.

The rate of correctly observed SCell activation delays and SCell deactivation delays shall for repeated tests be at least 90%.

A.11.4.3.3 SCell Activation and Deactivation of unknown SCell with PCell and SCell under CCA

A.11.4.3.3.1 Test Purpose and Environment

The purpose of this test is to verify that SCell activation and deactivation delays for SCell, with PCell and SCell under CCA, are within the requirements stated in clause 8.3A, when the SCell is unknown to the UE at the time of activation.

The supported test configurations are same as in Table A.11.4.3.1.1-1 above.

The test parameters are same as in Table A.11.4.3.1.1-2 above, except for parameters listed below in Table A.11.4.3.3.1-1. The cell-specific parameters are same as in Table A.11.4.3.1.1-3 above.

The test execution is the same as described in clause A.11.4.3.1 above.

Table A.11.4.3.3.1-1: General test parameters for unknown SCell activation with PCell ans SCell under CCA

Parameter	Unit	Value	Comment
T1	s	0.1	During this time period the PCell shall be known and the SCell configured, but not detected.

A.11.4.3.3.2 Test Requirements

During T2, starting after at least one CSI-RS transmission occasion for channel measurement and reporting from the slot specified in clause 4.3 of TS 38.213 [3] and until the UE has completed the SCell activation, the UE shall report out of range if the UE has available uplink resources to report CQI for the SCell.

During T2, the UE shall send the first valid CSI report (non-zero CQI) for the SCell in first available uplink resource for CSI reporting no later than slot m + (T_{HARQ}+$T_{activation_time_withCCA}$ + $T_{CSI_Reporting_withCCA}$)/NR_slot_length, where $T_{activation_time_withCCA} = T_{FirstSSB_MAX} + (1 + L_{3,1})*T_{SMTC_MAX} + (2 + L_{3,2})*T_{rs}$ + 5ms, as specified in clause 8.3A.2.

During T3, the UE shall stop sending CSI reports for SCell at latest in slot $n + \frac{T_{HARQ}+3ms}{NR\ slot\ length}$, as defined in clause 8.3A.3.

During T2, interruption on PCell shall not occur outside slot m +1+$\frac{T_{HARQ}}{NR\ slot\ length}$ to slot m +1+$\frac{T_{HARQ}+3+T_X}{NR\ slot\ length}$ with $T_X = T_{FirstSSB_MAX} + L_{3,1}* T_{SMTC_MAX.}$

During T3, interruption on PCell shall not occur outside slot n +1+T_{HARQ}/NR_slot_length to slot n+1+(T_{HARQ} +3ms)/NR_slot_length.

The interruption on PCell shall not be more than specified for SA in clause 8.2.2.2.2.

The rate of correctly observed SCell activation delays and SCell deactivation delays shall for repeated tests be at least 90%.

A.11.4.4 Beam failure detection and link recovery procedures

A.11.4.4.1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in non-DRX mode

A.11.4.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5A.

The test parameters are given in Tables A.11.4.4.1.1-1, A.11.4.4.1.1-2, A.11.4.4.1.1-3 and A.11.4.4.1.1-4 below. There is one cell, cell 1 which is the active cell, in the test. Cell 1 operates on a carrier frequency with CCA and transmits SSBs in DBT windows according to DL CCA model. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.11.4.4.1.1-1 shows the variation of the downlink SNR of the SSB in set q_0 in the active cell to emulate SSB based beam failure. Figure A.11.4.4.1.1-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 2 ms. The UE transmits the reporting according to UL CCA mode. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40 ms) in test 1.

Table A.11.4.4.1.1-1: Supported test configurations for FR1 PCell with CCA

Configuration	Description
1	TDD duplex mode, 30 kHz SSB SCS, 40 MHz bandwidth

Table A.11.4.4.1.1-2: General test parameters for FR1 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Value		Comment
			Test 1		
Active PSCell			Cell 1		
RF Channel Number			1		
DL CCA model			As specified in A.3.26.2.1		
UL CCA model			As specified in A.3.26.2.2		
Duplex mode	Config 1		TDD		
BWchannel	Config 1	MHz	40: NRB,c = 106		
DL initial BWP configuration	Config 1		DLBWP.0.1		
DL dedicated BWP configuration	Config 1		DLBWP.1.1		
UL initial BWP configuration	Config 1		ULBWP.0.1		
UL dedicated BWP configuration	Config 1		ULBWP.1.1		
TDD Configuration	Config 1		TDDConf.1.1 CCA		
CORESET Reference Channel	Config 1		CR.1.1 CCA		
SSB Configuration	Config 1		SSB.3 CCA for semi-static channel access		

			SSB.4 CCA for dynamic channel access		
DBT Window Configuration	Config 1		DBT.1		
PDSCH/PDCCH subcarrier spacing	Config 1		30 KHz		
PRACH Configuration	Config 1		Table A.3.8A.2.2-1		
SSB Index assigned as BFD RS (q_0)			0		
SSB Index assigned as CBD RS (q_1)			1		
OCNG parameters			OP.1		
CP length			Normal		
Correlation Matrix and Antenna Configuration			2x2 Low		
Beam failure detection transmission parameters	DCI format		1-0		
	Number of Control OFDM symbols		2		
	Aggregation level	CCE	8		
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0		
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0		
	DMRS precoder granularity		REG bundle size		
	REG bundle size		6		
DRX			OFF		
Gap pattern ID			gp0		
gapOffset			0		
rlmInSyncOutOfSyncThreshold			absent		When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1	dBm/ SCS kHz	-95		Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS			db0		Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1		see clause 5.17 of TS 38.321 [7]

beamFailureDetectionTimer			pbfd4		see clause 5.17 of TS 38.321 [7]
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.2.1 TDD		
CSI-RS for tracking	Config 1		TRS.1.2 TDD		
SSB Index assigned as RLM RS			0, 1		
T310 Timer		ms	1000		
N310			2		
T1		s	0.2		During this time the the UE shall be fully synchronized to cell 1
T2		s	0.93		
T3		s	0.52		
T4		s	0		
T5		s	0.45		
D1		s	0.41		
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.					

Table A.11.4.4.1.1-3: Cell specific test parameters for FR1 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
DL CCA probability $P_{CCA,DL}$	Note 10, 12		1.0	0.9375	0.9375	0.9375	0.9375
	Note 11, 12		1.0/1.0	0.75/0.75	0.75/0.75	0.75/0.75	0.75/0.75
UL CCA probability $P_{CCA,UL}$			1.0	1.0	1.0	1.0	1.0
L_{CCA_DL}			N/A	7			
W_{CCA_DL}		ms	N/A	$T_{Evaluate_CBD_SSB_CCA}$ Note 13			
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q_0	Config 1	dB	5	-3	-12	-12	-12
SNR_SSB of set q_1	Config 1	dB	-10	-10	10	10	10
SSB_RP of set q_1	Config 1	dBm/SCS kHz	-105	-105	-85	-85	-85
N_{oc}	Config 1	dBm/15 KHz	-98				
Propagation condition			TDL-C 300ns 100Hz				

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio the transmitted SSS REs during DBT window.
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6A.
Note 10:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 11:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2}.
Note 12:	For UE supporting both semi-static and dynamic cannel access, the UE can be tested under dynamic channel occupancy only.
Note 13:	As defined in Table 8.5A.5.2-1.

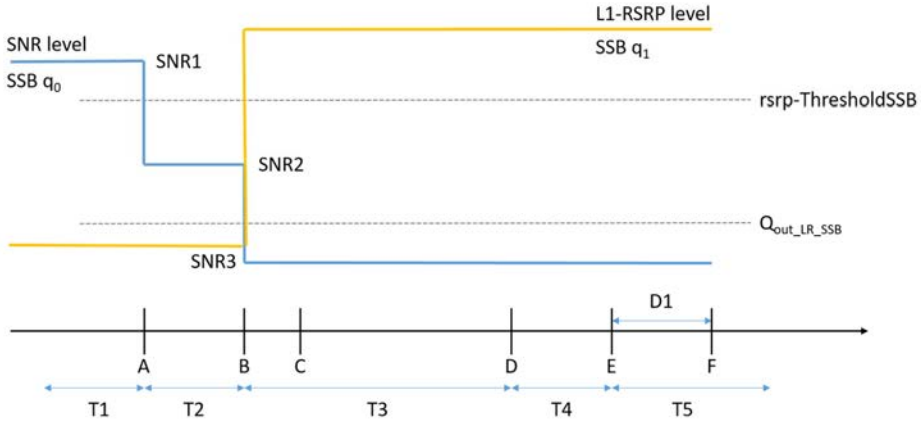

Figure A.11.4.4.1.1-1: SNR and L1-RSRP variation SSB for SSB-based beam failure detection and link recovery testing in non-DRX mode

A.11.4.4.1.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 410 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.11.4.4.2 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in DRX mode

A.11.4.4.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5A.

The test parameters are given in Tables A.11.4.4.2.1-1, A.11.4.4.2.1-2, and A.11.4.4.2.1-3 below. There is one cell, cell 1 which is the active cell, in the test. Cell 1 operates on a carrier frequency with CCA and transmits SSBs in DBT windows according to DL CCA model. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.11.4.4.2.1-1 shows the variation of the downlink SNR of the SSB in set q_0 in the active cell to emulate SSB based beam failure. Figure A.11.4.4.2.1-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 2 ms. The UE transmits the reporting according to UL CCA mode. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

Table A.11.4.4.2.1-1: Supported test configurations for FR1 PCell with CCA

Configuration	Description
1	TDD duplex mode, 30 kHz SSB SCS, 40 MHz bandwidth

Table A.11.4.4.2.1-2: General test parameters for FR1 PCell for SSB-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Value		Comment
			Test 1		
Active PSCell			Cell 1		
RF Channel Number			1		
DL CCA model			As specifieed in A.3.26.2.1		
UL CCA model			As specified in A.3.26.2.2		
Duplex mode	Config 1		TDD		
BWchannel	Config 1	MHz	40: NRB,c = 106		
DL initial BWP configuration	Config 1		DLBWP.0.1		
DL dedicated BWP configuration	Config 1		DLBWP.1.1		
UL initial BWP configuration	Config 1		ULBWP.0.1		
UL dedicated BWP configuration	Config 1		ULBWP.1.1		
TDD Configuration	Config 1		TDDConf.1.1 CCA		

CORESET Reference Channel	Config 1		CR.1.1 CCA		
SSB Configuration	Config 1		SSB.3 CCA for semi-static channel access SSB.4 CCA for dynamic channel access		
DBT Window Configuration	Config 1		DBT.1		
PDSCH/PDCCH subcarrier spacing	Config 1		30 KHz		
PRACH Configuration	Config 1		Table A.3.8A.2.2-1		
SSB Index assigned as BFD RS (q_0)			0		
SSB Index assigned as CBD RS (q_1)			1		
OCNG parameters			OP.1		
CP length			Normal		
Correlation Matrix and Antenna Configuration			2x2 Low		
Beam failure detection transmission parameters	DCI format		1-0		
	Number of Control OFDM symbols		2		
	Aggregation level	CCE	8		
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0		
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0		
	DMRS precoder granularity		REG bundle size		
	REG bundle size		6		
DRX			DRX.7		A.3.3.7
Gap pattern ID			N.A.		
rlmInSyncOutOfSyncThreshold			absent		When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1	dBm/ SCS kHz	-95		Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS			db0		Used for deriving rsrp-ThresholdCSI-RS

beamFailureInstanceMaxCount			n1		see clause 5.17 of TS 38.321 [7]
beamFailureDetectionTimer			pbfd4		see clause 5.17 of TS 38.321 [7]
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.2.1 TDD		
CSI-RS for tracking	Config 1		TRS.1.2 TDD		
SSB Index assigned as RLM RS			0, 1		
T310 Timer		ms	1000		
N310			2		
T1		s	1		During this time the the UE shall be fully synchronized to cell 1
T2		s	9.01		
T3		s	5.16		
T4		s	0		
T5		s	3.89		
D1		s	3.85		
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.					

Table A.11.4.4.2.1-3: Cell specific test parameters for FR1 PCell for SSB-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
DL CCA probability P_{CCA}	Note 10, 12		1.0	0.9375	0.9375	0.9375	0.9375
	Note 11, 12		1.0/1.0	0.75/0.75	0.75/0.75	0.75/0.75	0.75/0.75
UL CCA probability P_{CCA}			1.0	1.0	1.0	1.0	1.0
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q_0	Config 1	dB	5	-3	-12	-12	-12
SNR_SSB of set q_1	Config 1	dB	-10	-10	10	10	10
SSB_RP of set q_1	Config 1	dBm/SCS kHz	-105	-105	-85	-85	-85
N_{oc}	Config 1	dBm/15 KHz	-98				
Propagation condition			TDL-C 300ns 100Hz				

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio the transmitted SSS REs during DBT window.
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6A.
Note 10:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 11:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2}.
Note 12:	For UE supporting both semi-static and dynamic cannel access, the UE can be tested under dynamic channel occupancy only.

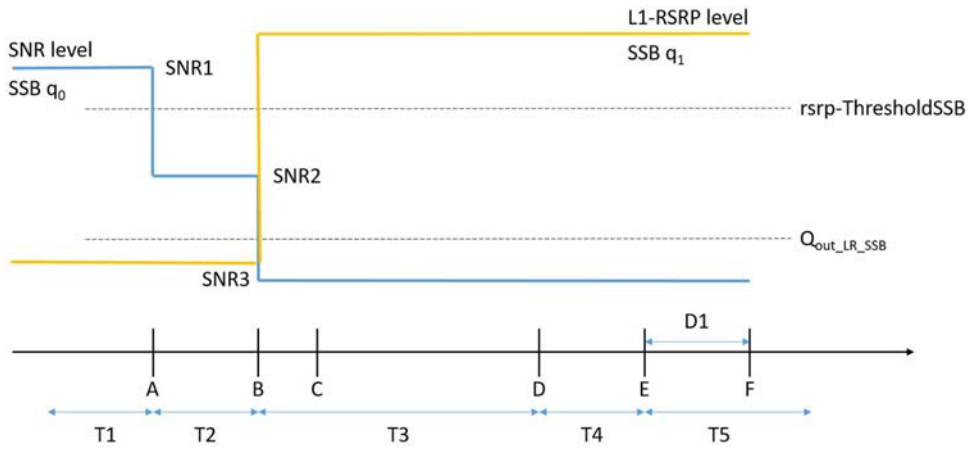

Figure A.11.4.4.2.1-1: SNR and L1-RSRP variation for SSB-based beam failure detection and link recovery testing in non-DRX mode

A.11.4.4.2.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 3850 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.11.4.5 Active BWP switching

A.11.4.5.1 UL active BWP switch delay with consistent UL LBT failure on PCell subject to UL CCA

A.11.4.5.1.1 Test Purpose and Environment

The purpose of this test is to verify the UL BWP switch delay requirement defined in clause 8.6.4.

The supported test configurations are shown in Table A.11.4.5.1.1-1. The test scenario comprises of one cell (Cell 1), which is Pcell as given in Table A.11.4.5.1.1-2. Cell-specific parameters of the cell are specified in Table A.11.4.5.1.1-3 below. SRS configuration used in the test is specified in Table A.11.4.5.1.1-4.

Before the test starts,

- UE is connected to Cell 1 on radio channel 1.
- UE is configured with 2 different UE-specific downlink and uplink bandwidth parts: DL BWP-1, DL BWP-2, UL BWP-1 and UL BWP-2 before starting the test. DL BWP-1 and DL BWP-2 always include bandwidth of the initial DL BWP and SSB. UL BWP-1 and UL BWP-2 always include bandwidth of the SRS.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is DL BWP-1.
- UE is indicated in *firstActiveUplinkBWP-Id* that the active UL BWP is UL BWP-1.
- UE is configured with *LBT-FailureRecoveryConfig* parameters for Cell 1.

The cell has constant signal levels throughout the test. The test consists of 2 successive time periods, with durations of T1 and T2, respectively.

During T1,

- Time period T1 starts when the UE has received the SRS configuration for periodic SRS transmission on active UL BWP-1.
- The UE shall perform UL CCA before SRS transmission.
- The parameter UL CCA probability P_{CCA} is set to 0 during T1. This requires the test system to set energy level above the detection level during portion of the UL slot where the UE performs UL CCA. This in turn forces the UE to fail the UL CCA. The UE consistently fails UL CCA during T1 and is therefore unable to transmit SRS.

During T2,

- T2 starts when the UE detects consistent UL LBT failures i.e. when total number of UL LBT failures in cell1 on active UL BWP-1 exceeds *lbt-FailureInstanceMaxCount* during *lbt-FailureDetectionTimer*.
- The UE upon detected consistent UL LBT failure starts the LBT recovery mechanism, which requires the UE to switch to active UL BWP-2 in Cell 1 and to send PRACH in the active UL BWP-2.

- Staring from T2, the UE shall be able to send PRACH in the active UL BWP-2 within the delay specified in clause 8.6.4.

Table A.11.4.5.1.1-1: Supported test configurations for UL BWP switch test in SA

Config	Description
1	With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: void	

Table A.11.4.5.1.1-2: General test parameters for UL BWP switch test in SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active Cell		Cell 1	Cell1 on RF channel number 1.
CP length		Normal	
DRX		OFF	
lbt-FailureDetectionTimer [2]	ms	80	Parameter configured by IE: *LBT-FailureRecoveryConfig* [1]
lbt-FailureInstanceMaxCount [2]		4	Parameter configured by IE: *LBT-FailureRecoveryConfig* [1]
T1	s	0.1	During T1 consistent LBT failure is detected on active UL BWP-1
T2	s	0.1	During T2 UE sends PRACH on active UL BWP-2

Table A.11.4.5.1.1-3: NR Cell specific test parameters for UL BWP switch test in SA

Parameter			Unit	Cell 1	
				T1	T2
TDD configuration		Config 1		TDDConf.1.1 CCA	
$BW_{channel}$		Config 1		40 MHz: $N_{RB,c}$ = 106	
DL CCA model		Config 1		As specified in clauseA.3.26.2.1	
UL CCA model		Config 1		As specified in clause A.3.26.2.2	
Active BWP ID		Config 1		1, 2	
Initial DL BWP Configuration		Config 1		DLBWP.0.2 Note 4	
Active DL BWP-1 Configuration		Config 1		DLBWP.1.1 Note 4	
Active DL BWP-2 Configuration		Config 1		DLBWP.1.3 Note 4	
Initial UL BWP Configuration		Config 1		ULBWP.0.2 Note 4	
Active UL BWP-1 Configuration		Config 1		ULBWP.1.1 Note 4	
Active UL BWP-2 Configuration		Config 1		ULBWP.1.3 Note 4	
PDSCH Reference measurement channel		Config 1		SR.1.1 CCA	
RMSI CORESET parameters		Config 1		CR.1.1 CCA	
Dedicated CORESET parameters		Config 1		CCR.1.3 CCA	
OCNG Patterns		Config 1		OP.1	
SSB Configuration	Semi- static channel acces	Config 1		SSB.1 CCA	
	Dymamic channel acces	Config 1		SSB.2 CCA	
SMTC Configuration		Config 1		SMTC.1 FR1	
Correlation Matrix and Antenna Configuration		Config 1		1x2 Low	
TRS Configuration		Config 1		TRS.1.2 TDD	
DL CCA probability for semi-static channel access (P_{CCA_DL})		Config 1		1	1
DL CCA model probability for dynamic static channel access ($P_{CCA_DL_1}$)		Config 1		1	1
DL CCA model probability for dynamic static channel access ($P_{CCA_DL_2}$)		Config 1		1	1
UL CCA probability (P_{CCA_UL})		Config 1		0	1

PRACH configuration	Config 1		N/A	Configuration #1 in Table A.3.8.2.1-1
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note 2	Config 1	dBm/SCS	-101	
SS-RSRP Note 3	Config 1	dBm/SCS	-84	
$\hat{E}_s/I_{ot}$	Config 1	dB	17	
$\hat{E}_s/N_{oc}$	Config 1	dB	17	
Io Note3	Config 1	dBm/ 38.16MHz	-52.86	
Propagation Condition			AWGN	

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].
Note 5: Parameters P_{CCA_DL}, $P_{CCA_DL_1}$, $P_{CCA_DL_2}$ and P_{CCA_UL} are defined in clause A.3.26.2.
Note 6: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

Table A.11.4.5.1.1-4: Sounding Reference Symbol Configuration for UL BWP Switch Test

Field	Value	Comment
c-SRS	24	Frequency hopping is disabled
b-SRS	0	
b-hop	0	
freqDomainPosition	0	Frequency domain position of SRS
freqDomainShift	0	
groupOrSequenceHopping	neither	No group or sequence hopping
SRS-PeriodicityAndOffset	sl5=4 for SCS 30kHz	Once every 5 slots
pathlossReferenceRS	ssb-Index=0	SSB #0 is used for SRS path loss estimation
usage	Codebook	Codebook based UL transmission
startPosition	0	resourceMapping setting: SRS on last symbol of slot, and 1symbols for SRS without repetition.
nrofSymbols	n1	
repetitionFactor	n1	
combOffset-n2	0	transmissionComb setting
cyclicShift-n2	0	
nrofSRS-Ports	port1	Number of antenna ports used for SRS transmission
Note: For further information see clause 6.3.2 in TS 38.331 [2].		

A.11.4.5.1.2 Test Requirements

The UE capable of *bwp-SwitchingDelay type1* [2] shall start to transmit the PRACH on active UL BWP-2 of Cell 1 (PCell) less than 21.5 ms from the beginning of time period T1.

The UE capable of *bwp-SwitchingDelay type2* [2] shall start to transmit the PRACH on active UL BWP-2 of Cell 1 (PCell) less than 23 ms from the beginning of time period T1.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The above delay is calculated as follows:'

The active UL BWP switch delay from UL BWP-1 to UL BWP-2 can be expressed as:

$$T_{BWPswitchDelay}*T_{slot} +1*T_{slot} + (1+ L_3)*T_{SSB,RO} + 10 \text{ ms}$$

Where:

$T_{BWPswitchDelay}$ = 1 ms (2 slots) and 2.5 ms (5 slots) for *bwp-SwitchingDelay* [2] *type1* and *type2* UE capabilities according to clause 8.6.4.

T_{slot} = It is the slot length. It is 0.5 ms for 30 kHz.

L3 = It is the number of consecutive SSB to PRACH occasion association periods during which no PRACH occasion is available for PRACH transmission due to UL CCA failure. L3= 0 during T2 since P_{CCA} = 1.

$T_{SSB,RO}$ = 10 ms according to FR1 PRACH configuration 1.

This gives a total of 21.5 ms and 23 ms for *type1* and *type2* UE respectively.

A.11.4.5.2 DCI-based and Timer-based Active BWP Switch

A.11.4.5.2.1 NR FR1- NR FR1 DL active BWP switch of PCell with non-DRX in SA

A.11.4.5.2.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement defined in clause 8.6, and interruption requirement on other active serving cell defined in clause 8.2.2.2.5.

The supported test configurations are shown in Table A.11.4.5.2.1.1-1 below. The test scenario comprises of one PCell (Cell 1) and one SCell (Cell 2) as given in Table A.11.4.5.2.1.1-2. NR Cell-specific parameters are specified in Table A.11.4.5.2.1.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on Cell 1 and the time duration of T2.

PDCCHs indicating new transmissions shall be sent continuously on SCell (Cell 2) to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), and Cell 2 (SCell) on radio channel 2 (SCC).
- UE is configured with 2 different UE-specific downlink bandwidth parts for PCell, BWP-1 and BWP-2, in Cell 1 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.
- UE is configured with 1 UE-specific downlink bandwidth parts the same as initial BWP for SCell, BWP-0 in Cell 2 before starting the test.

- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in PCell.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-0 in SCell.
- UE is configured with a *bwp-InactivityTimer* timer value for PCell.

All cells have constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

> Time period T1 starts when a DCI format 1_1 command for PCell DL BWP switch, sent from the test equipment to the UE, is received at the UE side in PCell's slot # denoted *i*. The UE shall switch its bandwidth part from BWP-1 to BWP-2.
>
> The UE shall be able to receive PDSCH no later than the first DL slot that occurs after the beginning of PCell's DL slot ($i+T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the PCell no later than the first UL slot that occurs after the beginning of slot ($i+T_{BWPswitchDelay}+k1$). The UE shall be continuously scheduled on PCell's BWP-2 no later than the first DL slot that occurs after the beginning of slot ($i+T_{BWPswitchDelay}$).
>
> The starting time of SCell (Cell 2) interruption due to BWP switch on PCell shall occur within the BWP switch delay.

During T2, the test equipment won't transmit DCI format for PDSCH reception on PCell (Cell 1).

During T3,

> The time period T3 starts from the slot #*j*, where j is the first slot of the subframe immediately after *bwp-InactivityTimer* timer expires. The UE should switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1.
>
> The UE shall be able to receive PDSCH no later than the first DL slot that occurs after the beginning of PCell's slot ($j+T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the SCell at latest on the first UL slot that occurs after the beginning of slot ($j+T_{BWPswitchDelay}+k1$). The UE shall be continuously scheduled on PCell's BWP-1 no later than the first DL slot that occurs after the beginning of slot ($j+T_{BWPswitchDelay}$).
>
> The starting time of SCell (Cell 2) interruption due to BWP switch of PCell shall occur within the BWP switch delay.

The test equipment verifies the DL BWP switch time in PCell by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK/NACK is received.

The test equipment verifies that potential interruption to SCell is carried out in the correct time span by monitoring ACK/NACK sent in SCell during BWP switch of PCell, respectively.

Table A.11.4.5.2.1.1-1: DL BWP switch supported test configurations

Config	Description
1	With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: Void Note 2: The UE supporting SA operation with only NR band(s) with shared spectrum access is required to be tested.	

Table A.11.4.5.2.1.1-2: General test parameters for DL BWP switch in SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1, 2	Two NR radio channels are used in this test

Active PCell		Cell 1	PCell on RF channel number 1.
Active SCell		Cell 2	SCell on RF channel number 2.
CP length		Normal	
DRX		OFF	For both PCell and SCell
DL CCA model		As specified in clause A.3.26.2.1	
UL CCA model		As specified in clauseA.3.26.2.2	
bwp-InactivityTimer	ms	200	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on SCC.
Cell2 timing offset to cell1	µs	3	Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.
T1	s	0.2	
T2	s	0.2	
T3	s	0.2	

Table A.11.4.5.2.1.1-3: NR Cell specific test parameters for DL BWP switch in SA

Parameter			Unit	Cell 1	Cell2
Frequency Range				FR1	
Duplex mode		Config 1		TDD	
TDD configuration		Config 1		TDDConf.1.1 CCA	
$BW_{channel}$		Config 1		40 MHz: $N_{RB,c}$ = 106	
Active BWP ID				1, 2	0
Initial DL BWP Configuration				DLBWP.0.2[Note4]	
Initial UL BWP Configuration				ULBWP.0.2[Note4]	
Active DL BWP-0 Configuration				N.A.	DLBWP.0.2[Note4]
Active DL BWP-1 Configuration				DLBWP.1.1[Note4]	N.A.
Active DL BWP-2 Configuration				DLBWP.1.3[Note4]	N.A.
Active UL BWP-0 Configuration				N.A.	ULBWP.0.2[Note4]
Active UL BWP-1 Configuration				ULBWP.1.1[Note4]	N.A.
Active UL BWP-2 Configuration				ULBWP.1.3[Note4]	N.A.
PDSCH Reference measurement channel		Config 1		SR.1.1 CCA	
RMSI CORESET parameters		Config 1		CR.1.1 CCA	
Dedicated CORESET parameters		Config 1		CCR.1.3 CCA	
OCNG Patterns				OP.1	
SSB Configuration	Semi- static channel acces	Config 1		SSB.1 CCA	
	Dymamic channel acces	Config 1		SSB.2 CCA	
SMTC Configuration		Config 1		SMTC.1	
DL CCA probability (P_{CCA_DL})		Config 1		1	1
UL CCA probability (P_{CCA_UL})		Config 1		1	1
Correlation Matrix and Antenna Configuration				1x2 Low	
EPRE ratio of PSS to SSS			dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc}[Note 2]		Config 1	dBm/SCS	-101	-101
SS-RSRP [Note 3]		Config 1	dBm/SCS	-84	-84
$\hat{E}_s/I_{ot}$		Config 1	dB	17	17
$\hat{E}_s/N_{oc}$		Config 1	dB	17	17
Io[Note3]		Config 1	dBm/38.16MHz	-52.86	-52.86
Propagation Condition				AWGN	AWGN

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].

A.11.4.5.2.1.2 Test Requirements

During T1, the UE shall start to send the ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot ($i+T_{BWPswitchDelay}+k1$).

During T3, the UE shall start to send the ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot ($j+T_{BWPswitchDelay}+k1$).

Where, *k1* is the timing between DL data receiving and acknowledgement as specified in [7].

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 8.6.2-1.

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

During T1 and T3, the start time of SCell interruption during PCell active BWP switch shall not happen outside the BWP switch delay.

The interruption of SCell shall not be longer than the interruption duration specified for active BWP switch in clause 8.2.2.2.5.

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch interruption to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK/NACK in the first DL slot that occurs after the beginning of DL slot ($i+ T_{BWPswitchDelay}+k1$), ($j+ T_{BWPswitchDelay}+k1$), then the UE shall use the next available uplink resource for reporting the corresponding ACK/NACK.

A.11.4.5.2.2 NR FR1 DL active BWP switch with non-DRX in SA

A.11.4.5.2.2.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement defined in clause 8.6.

The supported test configurations are shown in Table A.11.4.5.2.2.1-1. The test scenario comprises of one cell (Cell 1) as given in Table A.11.4.5.2.2.1-2. Cell-specific parameters of the cell are specified in Table A.11.4.5.2.2.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on Cell 1 to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 on radio channel 1.
- UE is configured with 2 different UE-specific downlink bandwidth parts, BWP-1 and BWP-2 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1.
- UE is configured with a *bwp-InactivityTimer* timer value for Cell1.

The cell has constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

> Time period T1 starts when a DCI format 1_1 command for DL BWP switch, sent from the test equipment to the UE, is received at the UE side in Cell1's slot # denoted *i*. The UE shall switch its bandwidth part from BWP-1 to BWP-2.
>
> The UE shall be able to receive PDSCH on the first DL slot that occurs after the beginning of Cell1's DL slot ($i+T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the Cell1 no later than the first UL slot that occurs after the beginning of slot ($i+T_{BWPswitchDelay}+k1$). The UE shall be continuously scheduled on Cell1's BWP-2 starting from the first DL slot that occurs after the beginning of slot ($i+T_{BWPswitchDelay}$).

During T2, the test equipment won't transmit DCI format for PDSCH reception on Cell1.

During T3,

> The time period T3 starts from the slot #*j*, where j is the first slot of the subframe immediately after *bwp-InactivityTimer* timer expires. The UE shall switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1.
>
> The UE shall be able to receive PDSCH on the first DL slot that occurs after the beginning of Cell1's slot ($j+T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the Cell1 at latest on the first UL slot that occurs after the beginning of slot ($j+T_{BWPswitchDelay}+k1$). The UE shall be continuously scheduled on Cell1's BWP-1 starting from the first DL slot that occurs after the beginning of slot ($j+T_{BWPswitchDelay}$).

The test equipment verifies the DL BWP switch time by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK/NACK is received.

Table A.11.4.5.2.2.1-1: DL BWP switch supported test configurations

Config	Description
1	With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.	
Note 2: A UE which fulfils the requirements in test case A.11.4.5.2.1 can skip the test cases in A.11.4.5.2.2.	
Note 3: The UE supporting SA operation with only NR band(s) with shared spectrum access is required to be tested.	

Table A.11.4.5.2.2.1-2: General test parameters for DL BWP switch in SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active Cell		Cell 1	Cell1 on RF channel number 1.
CP length		Normal	
DRX		OFF	
DL CCA model		As specified in clause A.3.26.2.1	
UL CCA model		As specified in clause A.3.26.2.2	

bwp-InactivityTimer	ms	200	
T1	s	0.2	
T2	s	0.2	
T3	s	0.2	

Table A.11.4.5.2.2.1-3: NR Cell specific test parameters for DL BWP switch in SA

Parameter			Unit	Cell 1
Frequency Range				FR1
Duplex mode		Config 1		TDD
TDD configuration		Config 1		TDDConf.1.1 CCA
$BW_{channel}$		Config 1		40 MHz: $N_{RB,c}$ = 106
Active BWP ID				1, 2
Initial DL BWP Configuration		Config 1		DLBWP.0.2 Note 4
Active DL BWP-1 Configuration		Config 1		DLBWP.1.1 Note 4
Active DL BWP-2 Configuration		Config 1		DLBWP.1.3 Note 4
Initial UL BWP Configuration		Config 1		ULBWP.0.2 Note 4
Active UL BWP-1 Configuration		Config 1		ULBWP.1.1 Note 4
Active UL BWP-2 Configuration		Config 1		ULBWP.1.3 Note 4
PDSCH Reference measurement channel		Config 1		SR.1.1 CCA
RMSI CORESET parameters		Config 1		CR.1.1 CCA
Dedicated CORESET parameters		Config 1		CCR.1.3 CCA
OCNG Patterns				OP.1
SSB Configuration	Semi- static channel acces	Config 1		SSB.1 CCA
	Dymamic channel acces	Config 1		SSB.2 CCA
SMTC Configuration		Config 1		SMTC.1
Correlation Matrix and Antenna Configuration				1x2 Low
TRS Configuration		Config 1		TRS.1.2 TDD
DL CCA probability (P_{CCA_DL})		Config 1		1
UL CCA probability (P_{CCA_UL})		Config 1		1
EPRE ratio of PSS to SSS			dB	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note 2		Config 1	dBm/SCS	-101
SS-RSRP Note 3		Config 1	dBm/SCS	-84
$\hat{E}_s/I_{ot}$		Config 1	dB	17
$\hat{E}_s/N_{oc}$		Config 1	dB	17
Io Note3		Config 1	dBm/38.16 MHz	-52.86
Propagation Condition				AWGN

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].

A.11.4.5.2.2.2 Test Requirements

During T1, the UE shall start to send the ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot ($i+T_{BWPswitchDelay}+k1$).

During T3, the UE shall start to send the ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot ($j+T_{BWPswitchDelay}+k1$).

Where, *k1* is the timing between DL data receiving and acknowledgement as specified in [7].

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 8.6.2-1.

All of the above test requirements shall be fulfilled in order for the observed Cell1 active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK/NACK in the first UL slot that occurs after beginning of DL slot ($i+T_{BWPswitchDelay}+k1$), ($j+T_{BWPswitchDelay}+k1$), then the UE shall use the next available uplink resource for reporting the corresponding ACK/NACK.

A.11.4.5.3 RRC-based Active BWP Switch

A.11.4.5.3.1 NR FR1 DL active BWP switch of Cell with non-DRX in SA

A.11.4.5.3.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement for RRC-based BWP switch defined in clause 8.6.

The supported test configurations are shown in Table A.11.4.5.3.1.1-1. The test scenario comprises of one Cell (Cell 1) as given in Table A.11.4.5.3.1.1-2. Cell-specific parameters of Cell are specified in Table A.11.4.5.3.1.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on Cell 1 to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 on radio channel 1.
- UE has bandwidth part BWP-1 in its RRC-configuration for Cell 1.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 of initial condition in Cell 1.

All cells have constant signal levels throughout the test.

The test consists of 1 time period, with duration of T1.

During T1,

Time period T1 starts when a *RRCReconfiguration* with updated bandwidth part configuration, sent from the test equipment to the UE, is completely received at the UE side in PCell's slot # denoted *i*. The UE shall reconfigure its bandwidth part with the updated bandwidth part BWP-1 of final condition.

The UE shall be able to receive PDSCH on PCell from the first DL slot that occurs after the beginning of DL slot $i + \frac{T_{\mathrm{RRCprocessingDelay}}+T_{\mathrm{BWPswitchDelayRRC}}}{\mathrm{NR\ Slot\ length}}$ as defined in clause 8.6.3 and starts to report valid ACK/NACK

for the PCell from the first UL slot that occurs after the beginning of DL slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$ + k1 on BWP-1 of final condition. The UE shall be continuously scheduled on PCell's BWP-1 of final condition starting from the first DL slot right after slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$.

$T_{RRCprocessingDelay}$ and $T_{BWPswitchDelayRRC}$ are defined in clause 8.6.3.

The test equipment verifies the DL BWP switch time in Cell by counting the time from the time when the RRC Reconfiguration message including updated BWP configuration is sent till the time when a vaild ACK/NACK is received is received.

Table A.11.4.5.3.1.1-1: DL BWP switch supported test configurations in SA scenario

Config	Description
1	With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: Void Note 2: The UE supporting SA operation with only NR band(s) with shared spectrum access is required to be tested.	

Table A.11.4.5.3.1.1-2: General test parameters for DL BWP switch in SA scenario

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active Cell		Cell 1	Cell on RF channel number 1.
CP length		Normal	
DL CCA model		As specified in clause A.3.26.2.1	
UL CCA model		As specified in clause A.3.26.2.2	
DRX		OFF	
T1	s	0.2	

Table A.11.4.5.3.1.1-3: NR Cell specific test parameters for DL BWP switch in SA scenario

Parameter			Unit	Cell 1
Frequency Range				FR1
Duplex mode		Config 1		TDD
TDD configuration		Config 1		TDDConf.1.1 CCA
$BW_{channel}$		Config 1		40 MHz: $N_{RB,c}$ = 106
Active BWP ID				1
Initial DL BWP Configuration		Config 1		DLBWP.0.2
Initial UL BWP Configuration		Config 1		ULBWP.0.2
Initial Condition	Active DL BWP-1 Configuration	Config 1		DLBWP.1.3
	Active UL BWP-1 Configuration	Config 1		ULBWP.1.3
Final Condition	Active DL BWP-1 Configuration	Config 1		DLBWP.1.1
	Active UL BWP-1 Configuration	Config 1		ULBWP.1.1
PDSCH Reference measurement channel		Config 1		SR.1.1 CCA
RMSI CORESET parameters		Config 1		CR.1.1 CCA
Dedicated CORESET parameters		Config 1		CCR.1.3 CCA
OCNG Patterns				OP.1
SSB Configuration	Semi-static channel acces	Config 1		SSB.1 CCA
	Dymamic channel acces	Config 1		SSB.2 CCA
SMTC Configuration				SMTC.1
TRS Configuration		Config 1		TRS.1.2 TDD
DL CCA probability (P_{CCA_DL})		Config 1		1
UL CCA probability (P_{CCA_UL})		Config 1		1
Propagation Condition				AWGN
EPRE ratio of PSS to SSS			dB	0
EPRE ratio of PBCH DMRS to SSS				

EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS (Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note 2	Config 1	dBm/SCS	-101
SS-RSRP Note 3	Config 1	dBm/SCS	-84
$\hat{E}_s/I_{ot}$	Config 1	dB	17
$\hat{E}_s/N_{oc}$	Config 1	dB	17
Io Note3	Config 1	dBm/38.16MHz	-52.86

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].

A.11.4.5.3.1.2 Test Requirements

During T1, the UE shall be ready for the reception of uplink grant for the Cell from the first DL slot that occurs right after the begining of slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$ and starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$ + k1.

Where, *k1* is the timing between DL data receiving and acknowledgement as specified in [7].

All of the above test requirements shall be fulfilled in order for the observed Cell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

A.11.4.6 Void

A.11.5 Measurement procedure

A.11.5.1 Intra-frequency measurements

A.11.5.1.1 Event-triggered reporting tests on PCC without gaps under non-DRX

A.11.5.1.1.1 Test purpose and environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clauses 9.2A.5.1 and 9.2A.5.2.

A.11.5.1.1.2 Test parameters

Two cells are deployed in the test, which are PCell (Cell 1) and a neighbour cell (Cell 2) on the same carrier frequency with CCA transmitting SSBs in DBT windows according to DL CCA model. The test parameters for the

two cells are given in Table A.11.5.1.1.2-1 and A.11.5.1.1.2-2 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1 and T2, respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

FFS: The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

The test is conducted for SS-RSRP, SS-RSRQ, and SS-SINR:

- In the first test (Test 1), the UE is configured with SS-RSRP as Event A3 measurement quantity.
- In the second test (Test 2), the UE is configured with SS-RSRQ as Event A3 measurement quantity.
- In the third test (Test 3), the UE is configured with SS-SINR as Event A3 measurement quantity.

Table A.11.5.1.1.2-1: Supported test configurations

Configuration	Description
1	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Table A.11.5.1.1.2-2: General test parameters for intra-frequency event triggered reporting without gaps

Editor's note: Table TBD

Table A.11.5.1.1.2-3: Cell-specific test parameters for intra-frequency event-triggered reporting without gaps

Editor's note: Table TBD

A.11.5.1.1.3 Test Requirements

The UE shall send one Event A3 triggered measurement report (SS-RSRP in Test 1, SS-RSRQ in Test 2, SS-SINR in Test 3), with a measurement reporting delay less than D1 ms from the beginning of time period T2.

Editor's note: D1=TBD.

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

FFS: NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.11.5.1.2 Event-triggered reporting tests on PCC without gaps under DRX

A.11.5.1.2.1 Test purpose and environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clauses 9.2A.5.1 and 9.2A.5.2.

A.11.5.1.2.2 Test parameters

A.11.5.1.2.3 Test Requirements

The UE shall send one Event A3 triggered measurement report (SS-RSRP in Test 1 and Test 2, SS-RSRQ in Test 3 and Test 4, SS-SINR in Test 5 and Test 6), with a measurement reporting delay less than D1 ms from the beginning of time period T2.

Editor's note: D1=TBD (D1 is different for different DRX configurations).

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

FFS: NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.11.5.1.3 Event-triggered reporting tests on PCC with per-UE gaps under non-DRX

A.11.5.1.3.1 Test purpose and environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clauses 9.2A.6.1 and 9.2A.6.2.

A.11.5.1.3.2 Test parameters

A.11.5.1.3.3 Test Requirements

The UE shall send one Event A3 triggered measurement report (SS-RSRP in Test 1, SS-RSRQ in Test 2, SS-SINR in Test 3), with a measurement reporting delay less than D1 ms from the beginning of time period T2.

Editor's note: D1=TBD.

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

FFS: NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.11.5.1.4 Event-triggered reporting tests on PCC with per-UE gaps under DRX

A.11.5.1.4.1 Test purpose and environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clauses 9.2A.6.1 and 9.2A.6.2.

A.11.5.1.4.2 Test parameters

A.11.5.1.4.3 Test Requirements

The UE shall send one Event A3 triggered measurement report (SS-RSRP in Test 1 and Test 2, SS-RSRQ in Test 3 and Test 4, SS-SINR in Test 5 and Test 6), with a measurement reporting delay less than D1 ms from the beginning of time period T2.

Editor's note: D1=TBD (D1 is different for different DRX configurations).

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

FFS: NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.11.5.1.5 Event-triggered reporting tests on SCC without gaps under non-DRX

A.11.5.1.5.1 Test purpose and environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clauses 9.2A.5.1 and 9.2A.5.2.

A.11.5.1.5.2 Test parameters

The UE shall send one Event A3 triggered measurement report (SS-RSRP in Test 1, SS-RSRQ in Test 2, SS-SINR in Test 3), with a measurement reporting delay less than D1 ms from the beginning of time period T2.

Editor's note: D1=TBD.

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

FFS: NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.11.5.1.6 Event-triggered reporting tests on SCC without gaps under DRX

A.11.5.1.6.1 Test purpose and environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clauses 9.2A.5.1 and 9.2A.5.2.

A.11.5.1.6.2 Test parameters

A.11.5.1.6.3 Test Requirements

The UE shall send one Event A3 triggered measurement report (SS-RSRP in Test 1 and Test 2, SS-RSRQ in Test 3 and Test 4, SS-SINR in Test 5 and Test 6), with a measurement reporting delay less than D1 ms from the beginning of time period T2.

Editor's note: D1=TBD (D1 is different for different DRX configurations).

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

FFS: NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.11.5.1.7 Event-triggered reporting tests on SCC with per-UE gaps under non-DRX

A.11.5.1.7.1 Test purpose and environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clauses 9.2A.6.1 and 9.2A.6.2.

A.11.5.1.7.2 Test parameters

A.11.5.1.7.3 Test Requirements

The UE shall send one Event A3 triggered measurement report (SS-RSRP in Test 1, SS-RSRQ in Test 2, SS-SINR in Test 3), with a measurement reporting delay less than D1 ms from the beginning of time period T2.

Editor's note: D1=TBD.

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

FFS: NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.11.5.1.8 Event-triggered reporting tests on SCC with per-UE gaps under DRX

A.11.5.1.8.1 Test purpose and environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clauses 9.2A.6.1 and 9.2A.6.2.

A.11.5.1.8.2 Test parameters

A.11.5.1.8.3 Test Requirements

The UE shall send one Event A3 triggered measurement report (SS-RSRP in Test 1 and Test 2, SS-RSRQ in Test 3 and Test 4, SS-SINR in Test 5 and Test 6), with a measurement reporting delay less than D1 ms from the beginning of time period T2.

Editor's note: D1=TBD (D1 is different for different DRX configurations).

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

FFS: NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.11.5.1.9 RSSI measurement reporting on PCC

A.11.5.1.9.1 Test purpose and environment

The purpose of this test is to verify that the UE correctly reports RSSI measurements. This test will partly verify the intra-frequency RSSI measurement reporting requirements in Section 9.2A.7.1.

A.11.5.1.9.2 Test parameters

In the test, the UE is configured to perform intra-frequency RSSI measurements on a carrier frequency under CCA.

Supported test configurations are shown in Table A.11.5.1.9.2-1. There is one cell in the test: Cell 1 which is PCell operating on a carrier frequency under CCA. Prior to the start of the time duration T1, the UE is connected to Cell 1.

Table A.11.5.1.9.2-1: Supported test configurations.

Configuration	Description
1	NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, bandwidth 40 MHz

Table A.11.5.1.9.2-2: General test parameters.

Editor's note: Table TBD

A.11.5.1.10 Channel occupancy measurement reporting on PCC

A.11.5.1.10.1 Test purpose and environment

The purpose of this test is to verify that the UE correctly reports channel occupancy measurements. This test will partly verify the intra-frequency channel occupancy measurement reporting requirements in Section 9.2A.7.2.

A.11.5.1.10.2 Test parameters

In the test, the UE is configured to perform intra-frequency channel occupancy measurements on a carrier frequency under CCA.

Supported test configurations are shown in Table A.11.5.1.10.2-1. There is one cell in the test: Cell 1 which is PCell operating on a carrier frequency under CCA. Prior to the start of the time duration T1, the UE is connected to Cell 1.

Table A.11.5.1.10.2-1: Supported test configurations.

Configuration	Description
1	NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, bandwidth 40 MHz

Table A.11.5.1.10.2-2: General test parameters.

Editor's note: Table is TBD

A.11.5.1.11 RSSI measurement reporting on SCC

A.11.5.1.11.1 Test purpose and environment

The purpose of this test is to verify that the UE correctly reports RSSI measurements. This test will partly verify the intra-frequency RSSI measurement reporting requirements in Section 9.2A.7.1.

A.11.5.1.11.2 Test parameters

In the test, the UE is configured to perform intra-frequency RSSI measurements on a carrier frequency under CCA.

Supported test configurations are shown in Table A.11.5.1.11.2-1. There are two cells in the test: Cell 1 which is PCell operating on a carrier frequency under CCA, and Cell 2 which is SCell operating on a carrier frequency under CCA. Prior to the start of the time duration T1, the UE is connected to Cell 1 and Cell 2.

Table A.11.5.1.11.2-1: Supported test configurations.

Configuration	Description
1	NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, bandwidth 40 MHz

Table A.11.5.1.11.2-2: General test parameters.

Editor's note: Tabls TBD

A.11.5.1.12 Channel occupancy measurement reporting on SCC

A.11.5.1.12.1 Test purpose and environment

The purpose of this test is to verify that the UE correctly reports channel occupancy measurements. This test will partly verify the intra-frequency channel occupancy measurement reporting requirements in Section 9.2A.7.2.

A.11.5.1.12.2 Test parameters

In the test, the UE is configured to perform intra-frequency channel occupancy measurements on a carrier frequency under CCA.

Supported test configurations are shown in Table A.11.5.1.12.2-1. There are two cells in the test: Cell 1 which is PCell operating on a carrier frequency under CCA, and Cell 2 which is SCell operating on a carrier frequency under CCA. Prior to the start of the time duration T1, the UE is connected to Cell 1 and Cell 2.

Table A.11.5.1.12.2-1: Supported test configurations.

Configuration	Description
1	NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, bandwidth 40 MHz

Table A.11.5.1.12.2-2: General test parameters.

Editor's note: Table is TBD

A.11.5.2 Inter-frequency measurements

A.11.5.2.1 RSSI measurement reporting

A.11.5.2.1.1 Test purpose and environment

The purpose of this test is to verify that the UE correctly reports RSSI measurements. This test will partly verify the inter-frequency RSSI measurement reporting requirements in Section 9.3A.8.

A.11.5.2.1.2 Test parameters

In the test, the UE is configured to perform inter-frequency RSSI measurements on a carrier frequency under CCA.

Supported test configurations are shown in Table A.11.5.2.1.2-1. There is one cell in the test: Cell 1 which is PCell operating on a carrier frequency under CCA. Prior to the start of the time duration T1, the UE is connected to Cell 1. The RSSI measurement is performed on an inter-frequency under CCA.

Table A.11.5.2.1.2-1: Supported test configurations.

Configuration	Description
1	NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, bandwidth 40 MHz

Table A.11.5.2.1.2-2: General test parameters.

Editor's note: Table TBD

A.11.5.2.2 Channel occupancy measurement reporting

A.11.5.2.2.1 Test purpose and environment

The purpose of this test is to verify that the UE correctly reports channel occupancy measurements. This test will partly verify the inter-frequency channel occupancy measurement reporting requirements in Section 9.3A.9.

A.11.5.2.2.2 Test parameters

In the test, the UE is configured to perform inter-frequency channel occupancy measurements on a carrier frequency under CCA.

Supported test configurations are shown in Table A.11.5.2.2.2-1. There is one cell in the test: Cell 1 which is PCell operating on a carrier frequency under CCA. Prior to the start of the time duration T1, the UE is connected to Cell 1. The channel occupancy measurement is performed on an inter-frequency under CCA.

Table A.11.5.2.2.2-1: Supported test configurations.

Configuration	Description
1	NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, bandwidth 40 MHz

Table A.11.5.2.2.2-2: General test parameters.

Editor's note: Table is TBD

A.11.5.2.3 Event triggered reporting tests for FR1 with CCA without SSB time index detection when DRX is not used

A.11.5.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements for NR cell with CCA in clause 9.3A.4 and 9.3A.5.

In this test, there are two cells: NR cell 1 with CCA as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 with CCA on NR RF channel 2. The test parameters are given in Tables A.11.5.2.3.1-1, A.11.5.2.3.1-2 and A.11.5.2.3.1-3.

In test 1, measurement gap pattern configuration # 0 as defined in Table A.11.5.2.3.1-2 is provided for UE that does not support per-FR gap. In test 2, measurement gap pattern configuration #4 as defined in Table A.11.5.2.3.1-2 is provided for UE that supports per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 2. Otherwise it is only required to pass test 1.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

Table A.11.5.2.3.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR1 with CCA

Config	Description
1	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.11.5.2.3.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 with CCA without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1	1, 2		Two FR1 NR carrier frequencies are used. Channels 1 and 2 are with CCA.
Active cells		Config 1	NR cell 1 with CCA (PCell)		NR cell 1 is on NR RF channel number 1 with CCA.
Neighbour cell		Config 1	NR cell 2 with CCA		NR cell 2 is on NR RF channel number 2 with CCA.
DL CCA model		Config 1	As specified in clause A.3.26.2.1		

UL CCA model		Config 1	As specified in clause A.3.26.2.2		
Gap Pattern Id		Config 1	0	4	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	9	9	
A3-Offset	dB	Config 1	-6		
Hysteresis	dB	Config 1	0		
CP length		Config 1	Normal		
TimeToTrigger	s	Config 1	0		
Filter coefficient		Config 1	0		L3 filtering is not used
DRX		Config 1	OFF		DRX is not used
Time offset between serving and neighbour cells		Config 1	3µs		Synchronous cells.
T1	s	Config 1	5		
T2	s	Config 1	1.7	1.7	

Table A.11.5.2.3.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 with CCA without SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1	1		2	
Duplex mode			Config 1	TDD			
TDD configuration			Config 1	TDDConf.1.1 CCA			
$BW_{channel}$		MHz	Config 1	40: $N_{RB,c}$ = 106			
BWP BW		MHz	Config 1	40: $N_{RB,c}$ = 106			
BWP configuration	Initial DL BWP	Config 1	Config 1	DLBWP.0.1		NA	
	Initial UL BWP	Config 1		ULBWP.0.1		NA	
	Dedicated DL BWP	Config 1		DLBWP.1.1		NA	
	Dedicated UL BWP	Config 1		ULBWP.1.1		NA	
TRS configuration			Config 1	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.1.1 CCA			
CORESET Reference Channel			Config 1	CR.1.1 CCA			
SSB parameters	Semi-static channel access Note 5,7		Config 1	SSB.1 CCA		SSB.1 CCA	
	Dynamic channel access Note 6,7		Config 1	SSB.2 CCA		SSB.2 CCA	
DBT window configuration			Config 1	As defined in A.3.28.1		As defined in A.3.28.1	
SMTC configuration defined in A.3.11			Config 1	SMTC.1		SMTC.4	
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1	P_{CCA_DL}=0.9375		P_{CCA_DL}=0.9375	

	Dynamic channel access Note 6,7		Config 1	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	
UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1	P_{CCA_UL}=1		P_{CCA_UL}=1	
	Dynamic channel access Note 6,7		Config 1	P_{CCA_UL}=1		P_{CCA_UL}=1	
L_{CCA_DL}			Config 1	12		12	
W_{CCA_DL}		ms	Config 1	$T_{PSS/SSS_sync_inter_cca}$		$T_{PSS/SSS_sync_inter_cca}$	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	30			
EPRE ratio of PSS to SSS			Config 1	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		dBm/15 kHz	Config 1	-104		-104	
N_{oc} Note2		dBm/SCS	Config 1	-101		-101	
SS-RSRP Note 3		dBm/SCS	Config 1	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$		dB	Config 1	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$		dB	Config 1	4	4	-Infinity	7
Io Note3		dBm/9.36MHz	Config 1	-58.49	-58.49	-63.94	-56.15
Propagation Condition			Config 1	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.

Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.

A.11.5.2.3.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_without_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.In test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_without_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2 UE is not required to report SSB time index.

$T_{identify_inter_cca_without_index} = (T_{PSS/SSS_sync_inter_cca} + T_{SSB_measurement_period_inter_cca})$ ms, where

$T_{PSS/SSS_sync_inter_cca}$: it is the time period used in PSS/SSS detection given in table 9.3A.4-1.

$T_{SSB_measurement_period_inter_cca}$: equal to a measurement period of SSB based measurement given in table 9.3A.5-1.

For test 1, MGRP = 40 ms and for test 2 MGRP = 20 ms.

SMTC period = 20 ms.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.11.5.2.4 Event triggered reporting tests for FR1 with CCA without SSB time index detection when DRX is used

A.11.5.2.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3A.4 and 9.3A.5.

In this test, there are two cells: NR cell 1 as PCell in FR1 with CCA on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 with CCA on NR RF channel 2. The test parameters are given in Tables A.11.5.2.4.1-1, A.11.5.2.4.1-2 and A.11.5.2.4.1-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table A.11.5.2.4.1-2 is provided for UE that does not support per-FR gap and in test 3&4 measurement gap pattern configuration #4 as defined in Table A.11.5.2.4.1-2 is provided for UE that supports per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 3&4. Otherwise it is only required to pass test 1&2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.11.5.2.4.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR1 with CCA

Config	Description
1	NR cell with CCA: 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.11.5.2.4.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 with CCA without SSB time index detection

Parameter	Unit	Test configuration	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
NR RF Channel Number		Config 1	1, 2				Two FR1 NR carrier frequencies are used. Channels 1 and 2 are with CCA.
Active cells		Config 1	NR cell 1 with CCA (PCell)				NR cell 1 is on NR RF channel number 1 with CCA.
Neighbour cell		Config 1	NR cell 2 with CCA				NR cell 2 is on NR RF channel number 2 with CCA.
DL CCA model		Config 1	As specified in clause A.3.26.2.1				
UL CCA model		Config 1	As specified in clause A.3.26.2.2				
Gap Pattern Id		Config 1	0		4		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	9		9		
A3-Offset	dB	Config 1	-6				
Hysteresis	dB	Config 1	0				
CP length		Config 1	Normal				
TimeToTrigger	s	Config 1	0				
Filter coefficient		Config 1	0				L3 filtering is not used
DRX		Config 1	DRX .1	DRX .2	DRX .1	DRX .2	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1	3μs				Synchronous cells.
T1	s	Config 1	5				
T2	s	Config 1	2.5	17	2.5	17	

Table A.11.5.2.4.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 with CCA without SSB time index detection

Parameter		Unit	Test configuration	Cell 1				Cell 2			
				T1	T2	T3	T4	T1	T2	T3	T4
NR RF Channel Number			Config 1	1				2			
Duplex mode			Config 1	TDD							
TDD configuration			Config 1	TDDConf.1.1 CCA							
$BW_{channel}$		MHz	Config 1	40: $N_{RB,c}$ = 106							
BWP BW		MHz	Config 1	40: $N_{RB,c}$ = 106							
BWP configuration	Initial DL BWP	Config 1	Config 1	DLBWP.0.1				NA			
	Initial UL BWP	Config 1		ULBWP.0.1				NA			
	Dedicated DL BWP	Config 1		DLBWP.1.1				NA			
	Dedicated UL BWP	Config 1		ULBWP.1.1				NA			
TRS configuration			Config 1	TRS.1.2 TDD				NA			

OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.1.1 CCA			
CORESET Reference Channel			Config 1	CR.1.1 CCA			
SSB parameters	Semi-static channel access Note 5,7		Config 1	SSB.1 CCA		SSB.1 CCA	
	Dynamic channel access Note 6,7		Config 1	SSB.2 CCA		SSB.2 CCA	
DBT window configuration			Config 1	As defined in A.3.28.1		As defined in A.3.28.1	
SMTC configuration defined in A.3.11			Config 1	SMTC.1		SMTC.4	
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1	P_{CCA_DL}=0.9375		P_{CCA_DL}=0.9375	
	Dynamic channel access Note 6,7		Config 1	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	
UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1	P_{CCA_UL}=1		P_{CCA_UL}=1	
	Dynamic channel access Note 6,7		Config 1	P_{CCA_UL}=1		P_{CCA_UL}=1	
L_{CCA_DL}			Config 1	5			
W_{CCA_DL}		ms	Config 1	$T_{PSS/SSS_sync_inter_cca}$			
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	30			
EPRE ratio of PSS to SSS			Config 1	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		dBm/15 kHz	Config 1	-104		-104	
N_{oc} Note2		dBm/SCS	Config 1	-101		-101	
SS-RSRP Note 3		dBm/SCS	Config 1	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$		dB	Config 1	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$		dB	Config 1	4	4	-Infinity	7
Io Note3		dBm/9.36MHz	Config 1	-58.49	-58.49	-63.94	-56.15

Propagation Condition		Config 1	AWGN	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.

Table A.11.5.2.4.1-4: DRX-Configuration for SA inter-frequency event triggered reporting without SSB time index detection

Field	Test1&3	Test2&4	Comment
	Value	Value	
drx-onDurationTimer	ms1	ms1	As specified in clause 6.3.2 in TS 38.331 [2]
drx-InactivityTimer	ms1	ms1	
drx-RetransmissionTimerDL	sl1	sl1	
drx-RetransmissionTimerUL	sl1	sl1	
drx-LongCycleStartOffset	ms40	Ms640	
shortDRX	disable	disable	

Table A.11.5.2.4.1-5: *TimeAlignmentTimer* -Configuration SA inter-frequency event triggered reporting without SSB time index detection

Field	Value	Comment
TimeAlignmentTimer	ms500	As specified in clause 6.3.2 in TS 38.331 [2]

A.11.5.2.4.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_without_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_without_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 3 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_without_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 4 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_without_index}$ from the beginning of time period T2. The UE shall not send event

triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1, 2, 3 and 4 UE is not required to report SSB time index.

$T_{identify_inter_cca_without_index}$ = ($T_{PSS/SSS_sync_inter_cca}$ + $T_{SSB_measurement_period_inter_cca}$) ms, where

$T_{PSS/SSS_sync_inter_cca}$: it is the time period used in PSS/SSS detection given in table 9.3A.4-1.

$T_{SSB_measurement_period_inter_cca}$: equal to a measurement period of SSB based measurement given in table 9.3A.5-1.

For tests 1 and 2, MGRP = 40 ms and for tests 3 and 4 MGRP = 20 ms.

For tests 1 and 3, DRX cycle = 40 ms and for tests 2 and 4 DRX cycle = 640 ms.

SMTC period = 20 ms.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.11.5.2.5 Event triggered reporting tests for FR1 with CCA with SSB time index detection when DRX is not used

A.11.5.2.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3A.4 and 9.3A.5.

In this test, there are two cells: NR cell 1 as PCell in FR1 with CCA on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 with CCA on NR RF channel 2. The test parameters are given in Tables A.11.5.2.5.1-1, A.11.5.2.5.1-2 and A.11.5.2.5.1-3.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.11.5.2.5.1-2 is provided for UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #4 as defined in Table A.11.5.2.5.1-2 is provided for UE that supports per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 2. Otherwise it is only required to pass test 1.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

Table A.11.5.2.5.1-1: SA event triggered reporting tests with SSB index reading for FR1-FR1 with CCA

Config	Description
1	NR cell with CCA: 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.11.5.2.5.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 with CCA with SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	

NR RF Channel Number		Config 1	1, 2		Two FR1 NR carrier frequencies are used. Channels 1 and 2 are with CCA.
Active cells		Config 1	NR cell 1 with CCA (PCell)		NR cell 1 is on NR RF channel number 1 with CCA.
Neighbour cell		Config 1	NR cell 2 with CCA		NR cell 2 is on NR RF channel number 2 with CCA.
DL CCA model		Config 1	As specified in clause A.3.26.2.1		
UL CCA model		Config 1	As specified in clause A.3.26.2.2		
Gap Pattern Id		Config 1	0	4	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	9	9	
A3-Offset	dB	Config 1	-6		
Hysteresis	dB	Config 1	0		
CP length		Config 1	Normal		
TimeToTrigger	s	Config 1	0		
Filter coefficient		Config 1	0		L3 filtering is not used
DRX		Config 1	OFF		DRX is not used
Time offset between serving and neighbour cells		Config 1	3μs		Synchronous cells.
T1	s	Config 1	5		
T2	s	Config 1	2	2	

Table A.11.5.2.5.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 with CCA with SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1	1		2	
Duplex mode			Config 1	TDD			
TDD configuration			Config 1	TDDConf.1.1 CCA			
$BW_{channel}$		MHz	Config 1	40: $N_{RB,c}$ = 106			
BWP BW		MHz	Config 1	40: $N_{RB,c}$ = 106			
BWP configuration	Initial DL BWP	Config 1	Config 1	DLBWP.0.1		NA	
	Initial UL BWP	Config 1		ULBWP.0.1		NA	
	Dedicated DL BWP	Config 1		DLBWP.1.1		NA	
	Dedicated UL BWP	Config 1		ULBWP.1.1		NA	
TRS configuration			Config 1	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.1.1 CCA			
CORESET Reference Channel			Config 1	CR.1.1 CCA			
SSB parameters			Config 1	SSB.1 CCA		SSB.1 CCA	

	Semi-static channel access Note 5,7						
	Semi-static channel access Note 5,7		Config 1	SSB.2 CCA		SSB.2 CCA	
DBT window configuration			Config 1	As defined in A.3.28.1		As defined in A.3.28.1	
SMTC configuration defined in A.3.11			Config 1	SMTC.1		SMTC.4	
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1	P_{CCA_DL}=0.9375		P_{CCA_DL}=0.9375	
	Dynamic channel access Note 6,7		Config 1	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	
UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1	P_{CCA_UL}=1		P_{CCA_UL}=1	
	Dynamic channel access Note 6,7		Config 1	P_{CCA_UL}=1		P_{CCA_UL}=1	
L_{CCA_DL}			Config 1	5		5	
W_{CCA_DL}		ms	Config 1	$T_{PSS/SSS_sync_inter_cca}$		$T_{PSS/SSS_sync_inter_cca}$	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	30			
EPRE ratio of PSS to SSS			Config 1	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		dBm/15 kHz	Config 1	-104		-104	
N_{oc} Note2		dBm/SCS	Config 1	-101		-101	
SS-RSRP Note 3		dBm/SCS	Config 1	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$		dB	Config 1	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$		dB	Config 1	4	4	-Infinity	7
Io Note3		dBm/9.36MHz	Config 1	-58.49	-58.49	-63.94	-56.15
Propagation Condition			Config 1	AWGN		AWGN	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 6:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 7:	For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.

A.11.5.2.5.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_with_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_with_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2 UE is required to report SSB time index.

$T_{identify_inter_cca_with_index} = (T_{PSS/SSS_sync_inter_cca} + T_{SSB_measurement_period_inter_cca} + T_{SSB_time_index_inter_cca})$ ms, where

$T_{PSS/SSS_sync_inter_cca}$: it is the time period used in PSS/SSS detection given in table 9.3A.4-1.

$T_{SSB_time_index_inter_cca}$: it is the time period used to acquire the index of the SSB being measured given in table 9.3A.4-2.

$T_{SSB_measurement_period_inter_cca}$: equal to a measurement period of SSB based measurement given in table 9.3A.5-1.

For test 1, MGRP = 40 ms and for test 2 MGRP = 20 ms.

SMTC period = 20 ms.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.11.5.2.6 Event triggered reporting tests for FR1 with CCA with SSB time index detection when DRX is used

A.11.5.2.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3A.4 and 9.3A.5.

In this test, there are two cells: NR cell 1 as PCell in FR1 with CCA on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 with CCA on NR RF channel 2. The test parameters are given in Tables A.11.5.2.6.1-1, A.11.5.2.6.1-2 and A.11.5.2.6.1-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table A.11.5.2.6.1-2 is provided for UE that does not support per-FR gap and in test 3&4 measurement gap pattern configuration #4 as defined in Table A.11.5.2.6.1-2 is provided for UE that supports per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 3&4. Otherwise it is only required to pass test 1&2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

UE needs to be provided at least once every 500 ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.11.5.2.6.1-1: SA event triggered reporting tests with SSB index reading for FR1-FR1 with CCA

Config	Description
1	NR cell with CCA: 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.11.5.2.6.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 with CCA with SSB time index detection

Parameter	Unit	Test configuration	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
NR RF Channel Number		Config 1	1, 2				Two FR1 NR carrier frequencies are used. Channels 1 and 2 are with CCA.
Active cells		Config 1	NR cell 1 with CCA (PCell)				NR cell 1 is on NR RF channel number 1 with CCA.
Neighbour cell		Config 1	NR cell 2 with CCA				NR cell 2 is on NR RF channel number 2 with CCA.
DL CCA model		Config 1	As specified in clause A.3.26.2.1				
UL CCA model		Config 1	As specified in clause A.3.26.2.2				
Gap Pattern Id		Config 1	0		4		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	9		9		
A3-Offset	dB	Config 1	-6				
Hysteresis	dB	Config 1	0				
CP length		Config 1	Normal				
TimeToTrigger	s	Config 1	0				
Filter coefficient		Config 1	0				L3 filtering is not used
DRX		Config 1	DRX .1	DRX .2	DRX .1	DRX .2	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1	3µs				Synchronous cells.
T1	s	Config 1	5				
T2	s	Config 1	3	20	3	20	

Table A.11.5.2.6.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 with CCA with SSB time index detection

Parameter		Unit	Test configuration	Cell 1				Cell 2			
				T1	T2	T3	T4	T1	T2	T3	T4
NR RF Channel Number			Config 1	1				2			
Duplex mode			Config 1	TDD							
TDD configuration			Config 1	TDDConf.1.1 CCA							
$BW_{channel}$		MHz	Config 1	40: $N_{RB,c}$ = 106							
BWP BW		MHz	Config 1	40: $N_{RB,c}$ = 106							
BWP configuration	Initial DL BWP	Config 1	Config 1	DLBWP.0.1				NA			
	Initial UL BWP	Config 1		ULBWP.0.1				NA			
	Dedicated DL BWP	Config 1		DLBWP.1.1				NA			
	Dedicated UL BWP	Config 1		ULBWP.1.1				NA			
TRS configuration			Config 1	TRS.1.2 TDD				NA			
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1				OP.1			
PDSCH Reference measurement channel			Config 1	SR.1.1 CCA							
CORESET Reference Channel			Config 1	CR.1.1 CCA							
SSB parameters	Semi-static channel access Note 5,7		Config 1	SSB.1 CCA				SSB.1 CCA			
	Semi-static channel access Note 5,7		Config 1	SSB.2 CCA				SSB.2 CCA			
DBT window configuration			Config 1	As defined in A.3.28.1				As defined in A.3.28.1			
SMTC configuration defined in A.3.11			Config 1	SMTC.1				SMTC.4			
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1	P_{CCA_DL}=0.9375				P_{CCA_DL}=0.9375			
	Dynamic channel access Note 6,7		Config 1	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75				$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75			
UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1	P_{CCA_UL}=1				P_{CCA_UL}=1			
	Dynamic channel access Note 6,7		Config 1	P_{CCA_UL}=1				P_{CCA_UL}=1			
L_{CCA_DL}			Config 1	2				2			
W_{CCA_DL}		ms	Config 1	$T_{PSS/SSS_sync_inter_cca}$				$T_{PSS/SSS_sync_inter_cca}$			
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	30							
EPRE ratio of PSS to SSS			Config 1	0				0			
EPRE ratio of PBCH DMRS to SSS											
EPRE ratio of PBCH to PBCH DMRS											

EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15 kHz	Config 1	-104		-104	
N_{oc} Note2	dBm/SCS	Config 1	-101		-101	
SS-RSRP Note 3	dBm/SCS	Config 1	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1	4	4	-Infinity	7
Io Note3	dBm/9.36MHz	Config 1	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.

Table A.11.5.2.6.1-4: DRX-Configuration for SA inter-frequency event triggered reporting without SSB time index detection

Field	Test1&3 Value	Test2&4 Value	Comment
drx-onDurationTimer	ms1	ms1	As specified in clause 6.3.2 in TS 38.331 [2]
drx-InactivityTimer	ms1	ms1	
drx-RetransmissionTimerDL	sl1	sl1	
drx-RetransmissionTimerUL	sl1	sl1	
drx-LongCycleStartOffset	ms40	Ms640	
shortDRX	disable	disable	

Table A.11.5.2.6.1-5: *TimeAlignmentTimer* -Configuration SA inter-frequency event triggered reporting without SSB time index detection

Field	Value	Comment
TimeAlignmentTimer	ms500	As specified in clause 6.3.2 in TS 38.331 [2]

A.11.5.2.6.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_with_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%. In test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_with_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 3 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_with_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 4 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_with_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1, 2, 3 and 4 UE is required to report SSB time index.

$T_{identify_inter_cca_with_index} = (T_{PSS/SSS_sync_inter_cca} + T_{SSB_measurement_period_inter_cca} + T_{SSB_time_index_inter_cca})$ ms, where

$T_{PSS/SSS_sync_inter_cca}$: it is the time period used in PSS/SSS detection given in table 9.3A.4-1.

$T_{SSB_time_index_inter_cca}$: it is the time period used to acquire the index of the SSB being measured given in table 9.3A.4-2.

$T_{SSB_measurement_period_inter_cca}$: equal to a measurement period of SSB based measurement given in table 9.3A.5-1.

For tests 1 and 2, MGRP = 40 ms and for tests 3 and 4 MGRP = 20 ms.

For tests 1 and 3, DRX cycle = 40 ms and for tests 2 and 4 DRX cycle = 640 ms.

SMTC period = 20 ms.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of

A.11.5.2.7 Event triggered reporting tests for FR1 without SSB time index detection when DRX is not used

A.11.5.2.7.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements for NR cell with CCA in clause 9.3A.4 and 9.3A.5.

In this test, there are two cells: NR cell 1 with CCA as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.11.5.2.7.1-1, A.11.5.2.7.1-2 and A.11.5.2.7.1-3.

In test 1, measurement gap pattern configuration # 0 as defined in Table A.11.5.2.7.1-2 is provided for UE that does not support per-FR gap. In test 2, measurement gap pattern configuration #4 as defined in Table A.11.5.2.7.1-2 is

provided for UE that supports per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 2. Otherwise it is only required to pass test 1.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

Table A.11.5.2.7.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR1 with CCA

Config	Description
1	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.11.5.2.7.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1,2,3	1, 2		Two FR1 NR carrier frequencies are used. NR channel 1 is with CCA.
Active cell		Config 1,2,3	NR cell 1 (PCell)		NR cell 1 is on NR RF channel number 1 with CCA.
Neighbour cell		Config 1,2,3	NR cell 2		NR cell 2 is on NR RF channel number 2.
DL CCA model		Config 1,2,3	As specified in clause A.3.26.2.1		
UL CCA model		Config 1,2,3	As specified in clause A.3.26.2.2		
Gap Pattern Id		Config 1,2,3	0	4	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	9	9	
A3-Offset	dB	Config 1,2,3	-6		
Hysteresis	dB	Config 1,2,3	0		
CP length		Config 1,2,3	Normal		
TimeToTrigger	s	Config 1,2,3	0		
Filter coefficient		Config 1,2,3	0		L3 filtering is not used
DRX		Config 1,2,3	OFF		DRX is not used
Time offset between serving and neighbour cells		Config 1,2,3	3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 1,2,3	3μs		Synchronous cells.
T1	s	Config 1,2,3	5		
T2	s	Config 1,2,3	1.7	1.7	

Table A.11.5.2.7.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2	
Duplex mode			Config 1	TDD		FDD	
			Config 2,3	TDD		TDD	
TDD configuration			Config 1	TDDConf.1.1 CCA		Not Applicable	
			Config 2	TDDConf.1.1 CCA		TDDConf.1.1	
			Config 3	TDDConf.1.1 CCA		TDDConf.2.1	
$BW_{channel}$		MHz	Config 1,2	40: $N_{RB,c}$ = 106		10: $N_{RB,c}$ = 52	
			Config 3	40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
BWP BW		MHz	Config 1,2	40: $N_{RB,c}$ = 106		10: $N_{RB,c}$ = 52	
			Config 3	40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1,2,3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,2,3	SR.1.1 CCA			
CORESET Reference Channel			Config 1,2,3	CR.1.1 CCA			
SSB parameters	Semi-static channel access Note 5,7		Config 1,2	SSB.1 CCA		SSB.1 FR1	
			Config 3	SSB.1 CCA		SSB.2 FR1	
	Semi-static channel access Note 5,7		Config 1,2	SSB.2 CCA		SSB.1 FR1	
			Config 3	SSB.2 CCA		SSB.2 FR1	
DBT window configuration			Config 1,2,3	As defined in A.3.28.1		Not applicable	
SMTC configuration defined in A.3.11			Config 1,2,3	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	30		15	
			Config 3	30		30	
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1,2,3	P_{CCA_DL}=0.9375		NA	
	Dynamic channel access Note 6,7		Config 1,2,3	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		NA	
UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1,2,3	P_{CCA_UL}=1		NA	
	Dynamic channel access Note 6,7		Config 1,2,3	P_{CCA_UL}=1		NA	
L_{CCA_DL}			Config 1,2,3	12		12	
W_{CCA_DL}		ms	Config 1,2,3	$T_{PSS/SSS_sync_inter_cca}$		$T_{PSS/SSS_sync_inter_cca}$	
EPRE ratio of PSS to SSS			Config 1,2,3	0		0	
EPRE ratio of PBCH DMRS to SSS							

EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15kHz	Config 1,2,3	-104		-98	
N_{oc} Note2	dBm/SCS	Config 1,2	-101		-98	
		Config 3	-101		-95	
SS-RSRP Note 3	dBm/SCS	Config 1,2	-91	-91	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3	4	4	-Infinity	7
Io Note3	dBm/9.36MHz	Config 1,2	-58.49	-58.49	-70.05	-62.26
	dBm/38.16MHz	Config 3	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.

A.11.5.2.7.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_without_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.In test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_without_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2 UE is not required to report SSB time index.

$T_{identify_inter_cca_without_index} = (T_{PSS/SSS_sync_inter_cca} + T_{SSB_measurement_period_inter_cca})$ ms, where

$T_{PSS/SSS_sync_inter_cca}$: it is the time period used in PSS/SSS detection given in table 9.3A.4-1.

$T_{SSB_measurement_period_inter_cca}$: equal to a measurement period of SSB based measurement given in table 9.3A.5-1.

For test 1, MGRP = 40 ms and for test 2 MGRP = 20 ms.

SMTC period = 20 ms.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.11.5.2.8 Event triggered reporting tests for FR1 without SSB time index detection when DRX is used

A.11.5.2.8.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3A.4 and 9.3A.5.

In this test, there are two cells: NR cell 1 with CCA as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.11.5.2.8.1-1, A.11.5.2.8.1-2 and A.11.5.2.8.1-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table A.11.5.2.8.1-2 is provided for UE that does not support per-FR gap and in test 3&4 measurement gap pattern configuration #4 as defined in Table A.11.5.2.8.1-2 is provided for UE that supports per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 3&4. Otherwise it is only required to pass test 1&2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.11.5.2.8.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR1 with CCA

Config	Description
1	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.11.5.2.8.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 with CCA without SSB time index detection

Parameter	Unit	Test configuration	Value				Comment
			Test 1	Test 2	Test 3	Test 4	

NR RF Channel Number		Config 1,2,3	1, 2				Two FR1 NR carrier frequencies are used. NR channel 1 is with CCA.
Active cell		Config 1,2,3	NR cell 1 (PCell)				NR cell 1 is on NR RF channel number 1 with CCA.
Neighbour cell		Config 1,2,3	NR cell 2				NR cell 2 is on NR RF channel number 2.
DL CCA model		Config 1,2,3	As specified in clause A.3.26.2.1				
UL CCA model		Config 1,2,3	As specified in clause A.3.26.2.2				
Gap Pattern Id		Config 1,2,3	0		4		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	9		9		
A3-Offset	dB	Config 1,2,3	-6				
Hysteresis	dB	Config 1,2,3	0				
CP length		Config 1,2,3	Normal				
TimeToTrigger	s	Config 1,2,3	0				
Filter coefficient		Config 1,2,3	0				L3 filtering is not used
DRX		Config 1,2,3	DRX .1	DRX .2	DRX .1	DRX .2	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1,2,3	3ms				Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 1,2,3	3μs				Synchronous cells.
T1	s	Config 1,2,3	5				
T2	s	Config 1,2,3	2.5	17	2.5	17	

Table A.11.5.2.8.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 with CCA without SSB time index detection

Parameter		Unit	Test configuration	Cell 1				Cell 2			
				T1	T2	T3	T4	T1	T2	T3	T4
NR RF Channel Number			Config 1,2,3	1				2			
Duplex mode			Config 1	TDD				FDD			
			Config 2,3	TDD				TDD			
TDD configuration			Config 1	TDDConf.1.1 CCA				Not Applicable			
			Config 2	TDDConf.1.1 CCA				TDDConf.1.1			
			Config 3	TDDConf.1.1 CCA				TDDConf.2.1			
$BW_{channel}$		MHz	Config 1,2	40: $N_{RB,c}$ = 106				10: $N_{RB,c}$ = 52			
			Config 3	40: $N_{RB,c}$ = 106				40: $N_{RB,c}$ = 106			
BWP BW		MHz	Config 1,2	40: $N_{RB,c}$ = 106				10: $N_{RB,c}$ = 52			
			Config 3	40: $N_{RB,c}$ = 106				40: $N_{RB,c}$ = 106			
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1				NA			
	Initial UL BWP			ULBWP.0.1				NA			
	Dedicated DL BWP			DLBWP.1.1				NA			
	Dedicated UL BWP			ULBWP.1.1				NA			
TRS configuration			Config 1,2,3	TRS.1.2 TDD				NA			
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1				OP.1			

PDSCH Reference measurement channel			Config 1,2,3	SR.1.1 CCA			
CORESET Reference Channel			Config 1,2,3	CR.1.1 CCA			
SSB parameters	Semi-static channel access Note 5,7		Config 1,2	SSB.1 CCA		SSB.1 FR1	
			Config 3	SSB.1 CCA		SSB.2 FR1	
	Semi-static channel access Note 5,7		Config 1,2	SSB.2 CCA		SSB.1 FR1	
			Config 3	SSB.2 CCA		SSB.2 FR1	
DBT window configuration			Config 1,2,3	As defined in A.3.28.1		Not applicable	
SMTC configuration defined in A.3.11			Config 1,2,3	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	30		15	
			Config 3	30		30	
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1,2,3	P_{CCA_DL}=0.9375		NA	
	Dynamic channel access Note 6,7		Config 1,2,3	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		NA	
UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1,2,3	P_{CCA_UL}=1		NA	
	Dynamic channel access Note 6,7		Config 1,2,3	P_{CCA_UL}=1		NA	
L_{CCA_DL}			Config 1,2,3	5		5	
W_{CCA_DL}		ms	Config 1,2,3	$T_{PSS/SSS_sync_inter_cca}$		$T_{PSS/SSS_sync_inter_cca}$	
EPRE ratio of PSS to SSS			Config 1,2,3	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		dBm/15kHz	Config 1,2,3	-104		-98	
N_{oc} Note2		dBm/SCS	Config 1,2	-101		-98	
			Config 3	-101		-95	
SS-RSRP Note 3		dBm/SCS	Config 1,2	-91	-91	-Infinity	-91
			Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$		dB	Config 1,2,3	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$		dB	Config 1,2,3	4	4	-Infinity	7
Io Note3		dBm/9.36MHz	Config 1,2	-58.49	-58.49	-70.05	-62.26

	dBm/38.16MHz	Config 3	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.

Table A.11.5.2.8.1-4: DRX-Configuration for SA inter-frequency event triggered reporting without SSB time index detection

Field	Test1&3	Test2&4	Comment
	Value	Value	
drx-onDurationTimer	ms1	ms1	As specified in clause 6.3.2 in TS 38.331 [2]
drx-InactivityTimer	ms1	ms1	
drx-RetransmissionTimerDL	sl1	sl1	
drx-RetransmissionTimerUL	sl1	sl1	
drx-LongCycleStartOffset	ms40	Ms640	
shortDRX	disable	disable	

Table A.11.5.2.8.1-5: *TimeAlignmentTimer* -Configuration SA inter-frequency event triggered reporting without SSB time index detection

Field	Value	Comment
TimeAlignmentTimer	ms500	As specified in clause 6.3.2 in TS 38.331 [2]

A.11.5.2.8.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_without_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_without_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 3 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_without_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 4 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_without_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1, 2, 3 and 4 UE is not required to report SSB time index.

$T_{identify_inter_cca_without_index} = (T_{PSS/SSS_sync_inter_cca} + T_{SSB_measurement_period_inter_cca})$ ms, where

$T_{PSS/SSS_sync_inter_cca}$: it is the time period used in PSS/SSS detection given in table 9.3A.4-1.

$T_{SSB_measurement_period_inter_cca}$: equal to a measurement period of SSB based measurement given in table 9.3A.5-1.

For tests 1 and 2, MGRP = 40 ms and for tests 3 and 4 MGRP = 20 ms.

For tests 1 and 3, DRX cycle = 40 ms and for tests 2 and 4 DRX cycle = 640 ms.

SMTC period = 20 ms.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.11.5.2.9 Event triggered reporting tests for FR1 with SSB time index detection when DRX is not used

A.11.5.2.9.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3A.4 and 9.3A.5.

In this test, there are two cells: NR cell 1 with CCA as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.11.5.2.9.1-1, A.11.5.2.9.1-2 and A.11.5.2.9.1-3.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.11.5.2.9.1-2 is provided for UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #4 as defined in Table A.11.5.2.9.1-2 is provided for UE that supports per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 2. Otherwise it is only required to pass test 1.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

Table A.11.5.2.9.1-1: SA event triggered reporting tests with SSB index reading for FR1-FR1 with CCA

Config	Description
1	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell without CCA: 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.11.5.2.9.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 with CCA with SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1,2,3	1, 2		Two FR1 NR carrier frequencies are used. NR channel 1 is with CCA.
Active cell		Config 1,2,3	NR cell 1 (PCell)		NR cell 1 is on NR RF channel number 1 with CCA.
Neighbour cell		Config 1,2,3	NR cell 2		NR cell 2 is on NR RF channel number 2.
DL CCA model		Config 1,2,3	As specified in clause A.3.26.2.1		
UL CCA model		Config 1,2,3	As specified in clause A.3.26.2.2		
Gap Pattern Id		Config 1,2,3	0	4	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	9	9	
A3-Offset	dB	Config 1,2,3	-6		
Hysteresis	dB	Config 1,2,3	0		
CP length		Config 1,2,3	Normal		
TimeToTrigger	s	Config 1,2,3	0		
Filter coefficient		Config 1,2,3	0		L3 filtering is not used
DRX		Config 1,2,3	OFF		DRX is not used
Time offset between serving and neighbour cells		Config 1,2,3	3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 1,2,3	3μs		Synchronous cells.
T1	s	Config 1,2,3	5		
T2	s	Config 1,2,3	2	2	

Table A.11.5.2.9.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 with CCA with SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2	
Duplex mode			Config 1	TDD		FDD	
			Config 2,3	TDD		TDD	
TDD configuration			Config 1	TDDConf.1.1 CCA		Not Applicable	
			Config 2	TDDConf.1.1 CCA		TDDConf.1.1	
			Config 3	TDDConf.1.1 CCA		TDDConf.2.1	
$BW_{channel}$		MHz	Config 1,2	40: $N_{RB,c}$ = 106		10: $N_{RB,c}$ = 52	
			Config 3	40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
BWP BW		MHz	Config 1,2	40: $N_{RB,c}$ = 106		10: $N_{RB,c}$ = 52	
			Config 3	40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	

	Dedicated UL BWP			ULBWP.1.1	NA
TRS configuration			Config 1,2,3	TRS.1.2 TDD	NA
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1	OP.1
PDSCH Reference measurement channel			Config 1,2,3	SR.1.1 CCA	
CORESET Reference Channel			Config 1,2,3	CR.1.1 CCA	
SSB parameters	Semi-static channel access Note 5,7		Config 1,2	SSB.1 CCA	SSB.1 FR1
			Config 3	SSB.1 CCA	SSB.2 FR1
	Semi-static channel access Note 5,7		Config 1,2	SSB.2 CCA	SSB.1 FR1
			Config 3	SSB.2 CCA	SSB.2 FR1
DBT window configuration			Config 1,2,3	As defined in A.3.28.1	Not applicable
SMTC configuration defined in A.3.11			Config 1,2,3	SMTC.1	SMTC.4
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	30	15
			Config 3	30	30
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1,2,3	P_{CCA_DL}=0.9375	NA
	Dynamic channel access Note 6,7		Config 1,2,3	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	NA
UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1,2,3	P_{CCA_UL}=1	NA
	Dynamic channel access Note 6,7		Config 1,2,3	P_{CCA_UL}=1	NA
L_{CCA_DL}			Config 1,2,3	5	5
W_{CCA_DL}		ms	Config 1,2,3	$T_{PSS/SSS_sync_inter_cca}$	$T_{PSS/SSS_sync_inter_cca}$
EPRE ratio of PSS to SSS			Config 1,2,3	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} Note2		dBm/15kHz	Config 1,2,3	-104	-98
N_{oc} Note2		dBm/SCS	Config 1,2	-101	-98
			Config 3	-101	-95
SS-RSRP Note 3		dBm/SCS	Config 1,2	-91 -91	-Infinity -91
			Config 3	-91 -91	-Infinity -88

$\hat{E}_s/I_{ot}$	dB	Config 1,2,3	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3	4	4	-Infinity	7
Io[Note3]	dBm/9.36MHz	Config 1,2	-58.49	-58.49	-70.05	-62.26
	dBm/38.16MHz	Config 3	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.

A.11.5.2.9.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_with_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_with_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2 UE is required to report SSB time index.

$T_{identify_inter_cca_with_index} = (T_{PSS/SSS_sync_inter_cca} + T_{SSB_measurement_period_inter_cca} + T_{SSB_time_index_inter_cca})$ ms, where

$T_{PSS/SSS_sync_inter_cca}$: it is the time period used in PSS/SSS detection given in table 9.3A.4-1.

$T_{SSB_time_index_inter_cca}$: it is the time period used to acquire the index of the SSB being measured given in table 9.3A.4-2.

$T_{SSB_measurement_period_inter_cca}$: equal to a measurement period of SSB based measurement given in table 9.3A.5-1.

For test 1, MGRP = 40 ms and for test 2 MGRP = 20 ms.

SMTC period = 20 ms.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.11.5.2.10 Event triggered reporting tests for FR1 with SSB time index detection when DRX is used

A.11.5.2.10.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3A.4 and 9.3A.5.

In this test, there are two cells: NR cell 1 with CCA as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.11.5.2.10.1-1, A.11.5.2.10.1-2 and A.11.5.2.10.1-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table A.11.5.2.10.1-2 is provided for UE that does not support per-FR gap and in test 3&4 measurement gap pattern configuration #4 as defined in Table A.11.5.2.10.1-2 is provided for UE that supports per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 3&4. Otherwise it is only required to pass test 1&2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

UE needs to be provided at least once every 500 ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.11.5.2.10.1-1: SA event triggered reporting tests with SSB index reading for FR1-FR1 with CCA

Config	Description
1	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.11.5.2.10.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 with CCA with SSB time index detection

Parameter	Unit	Test configuration	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
NR RF Channel Number		Config 1,2,3	1, 2				Two FR1 NR carrier frequencies are used. NR channel 1 is with CCA.
Active cell		Config 1,2,3	NR cell 1 (PCell)				NR cell 1 is on NR RF channel number 1 with CCA.
Neighbour cell		Config 1,2,3	NR cell 2				NR cell 2 is on NR RF channel number 2.
DL CCA model		Config 1,2,3	As specified in clause A.3.26.2.1				
UL CCA model		Config 1,2,3	As specified in clause A.3.26.2.2				
Gap Pattern Id		Config 1,2,3	0		4		As specified in clause 9.1.2-1.

Measurement gap offset		Config 1,2,3	9		9		
A3-Offset	dB	Config 1,2,3	-6				
Hysteresis	dB	Config 1,2,3	0				
CP length		Config 1,2,3	Normal				
TimeToTrigger	s	Config 1,2,3	0				
Filter coefficient		Config 1,2,3	0				L3 filtering is not used
DRX		Config 1,2,3	DRX .1	DRX .2	DRX .1	DRX .2	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1,2,3	3ms				Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 1,2,3	3μs				Synchronous cells.
T1	s	Config 1,2,3	5				
T2	s	Config 1,2,3	3	20	3	20	

Table A.11.5.2.10.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 with CCA with SSB time index detection

Parameter		Unit	Test configuration	Cell 1				Cell 2			
				T1	T2	T3	T4	T1	T2	T3	T4
NR RF Channel Number			Config 1,2,3	1				2			
Duplex mode			Config 1	TDD				FDD			
			Config 2,3	TDD				TDD			
TDD configuration			Config 1	TDDConf.1.1 CCA				Not Applicable			
			Config 2	TDDConf.1.1 CCA				TDDConf.1.1			
			Config 3	TDDConf.1.1 CCA				TDDConf.2.1			
$BW_{channel}$		MHz	Config 1,2	40: $N_{RB,c}$ = 106				10: $N_{RB,c}$ = 52			
			Config 3	40: $N_{RB,c}$ = 106				40: $N_{RB,c}$ = 106			
BWP BW		MHz	Config 1,2	40: $N_{RB,c}$ = 106				10: $N_{RB,c}$ = 52			
			Config 3	40: $N_{RB,c}$ = 106				40: $N_{RB,c}$ = 106			
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1				NA			
	Initial UL BWP			ULBWP.0.1				NA			
	Dedicated DL BWP			DLBWP.1.1				NA			
	Dedicated UL BWP			ULBWP.1.1				NA			
TRS configuration			Config 1,2,3	TRS.1.2 TDD				NA			
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1				OP.1			
PDSCH Reference measurement channel			Config 1,2,3	SR.1.1 CCA							
CORESET Reference Channel			Config 1,2,3	CR.1.1 CCA							
SSB parameters	Semi-static channel access Note 5,7		Config 1,2	SSB.1 CCA				SSB.1 FR1			
			Config 3	SSB.1 CCA				SSB.2 FR1			
	Semi-static channel access Note 5,7		Config 1,2	SSB.2 CCA				SSB.1 FR1			
			Config 3	SSB.2 CCA				SSB.2 FR1			
DBT window configuration			Config 1,2,3	As defined in A.3.28.1				Not applicable			
SMTC configuration defined in A.3.11			Config 1,2,3	SMTC.1				SMTC.4			
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	30				15			
			Config 3	30				30			

DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1,2,3	P_{CCA_DL}=0.9375		NA	
	Dynamic channel access Note 6,7		Config 1,2,3	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		NA	
UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1,2,3	P_{CCA_UL}=1		NA	
	Dynamic channel access Note 6,7		Config 1,2,3	P_{CCA_UL}=1		NA	
L_{CCA_DL}			Config 1,2,3	2		2	
W_{CCA_DL}		ms	Config 1,2,3	$T_{PSS/SSS_sync_inter_cca}$		$T_{PSS/SSS_sync_inter_cca}$	
EPRE ratio of PSS to SSS			Config 1,2,3	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		dBm/15kHz	Config 1,2,3	-104		-98	
N_{oc} Note2		dBm/SCS	Config 1,2	-101		-98	
			Config 3	-101		-95	
SS-RSRP Note 3		dBm/SCS	Config 1,2	-91	-91	-Infinity	-91
			Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$		dB	Config 1,2,3	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$		dB	Config 1,2,3	4	4	-Infinity	7
Io Note3		dBm/9.36MHz	Config 1,2	-58.49	-58.49	-70.05	-62.26
		dBm/38.16MHz	Config 3	-58.49	-58.49	-63.94	-56.15
Propagation Condition			Config 1,2,3	AWGN		AWGN	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 6:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 7:	For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.

Table A.11.5.2.10.1-4: DRX-Configuration for SA inter-frequency event triggered reporting without SSB time index detection

Field	Test1&3	Test2&4	Comment
	Value	Value	
drx-onDurationTimer	ms1	ms1	As specified in clause 6.3.2 in TS 38.331 [2]
drx-InactivityTimer	ms1	ms1	
drx-RetransmissionTimerDL	sl1	sl1	
drx-RetransmissionTimerUL	sl1	sl1	
drx-LongCycleStartOffset	ms40	Ms640	
shortDRX	disable	disable	

Table A.11.5.2.10.1-5: *TimeAlignmentTimer* -Configuration SA inter-frequency event triggered reporting without SSB time index detection

Field	Value	Comment
TimeAlignmentTimer	ms500	As specified in clause 6.3.2 in TS 38.331 [2]

A.11.5.2.10.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_with_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.In test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_with_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 3 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_with_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 4 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_with_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1, 2, 3 and 4 UE is required to report SSB time index.

$T_{identify_inter_cca_with_index}$ = ($T_{PSS/SSS_sync_inter_cca}$ + $T_{SSB_measurement_period_inter_cca}$ + $T_{SSB_time_index_inter_cca}$) ms, where

$T_{PSS/SSS_sync_inter_cca}$: it is the time period used in PSS/SSS detection given in table 9.3A.4-1.

$T_{SSB_time_index_inter_cca}$: it is the time period used to acquire the index of the SSB being measured given in table 9.3A.4-2.

$T_{SSB_measurement_period_inter_cca}$: equal to a measurement period of SSB based measurement given in table 9.3A.5-1.

For tests 1 and 2, MGRP = 40 ms and for tests 3 and 4 MGRP = 20 ms.

For tests 1 and 3, DRX cycle = 40 ms and for tests 2 and 4 DRX cycle = 640 ms.

SMTC period = 20 ms.

NOTE: The actual overall delays measured in the test may be up to 2xTTI_{DCCH} higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.11.5.3 Inter-RAT E-UTRAN measurements

A.11.5.4 L1-RSRP measurements for beam reporting

A.11.5.4.1 SSB based L1-RSRP measurement when DRX is not used

A.11.5.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5A.4.1, with the testing configurations for NR cells in Table A.11.5.4.1.1-1.

Table A.11.5.4.1.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
1	With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.11.5.4.1.2 Test parameters

There is one cell in the test, the FR1 PCell (Cell 1). Cell 1 operates on a carrier frequency with CCA and transmits SSBs in DBT windows according to DL CCA model. The test parameters for the Cell 1 are given in Table A.11.5.4.1.2-1 and Table A.11.5.4.1.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The UE transmits the reporting according to UL CCA model. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.11.5.4.1.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1		freq1
DL CCA model	1		As specifieed in A.3.20.2.1
UL CCA model	1		As specified in A.3.20.2.2
Duplex mode	1		TDD
TDD Configuration	1		TDDConf.1.1 CCA
$BW_{channel}$	1	MHz	40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1		SR.1.1 CCA
RMSI CORESET Reference Channel	1		CR.1.1 CCA
Dedicated CORESET Reference Channel	1		CCR.1.1 CCA
SSB configuration	1		SSB.3 CCA for semi-static channel access SSB.4 CCA for dynamic channel access
OCNG Patterns	1		OP.1
Initial BWP Configuration	1		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1		DLBWP.1.1 ULBWP.1.1
DBT Window Configuration	1		DBT.1
TRS Configuration	1		TRS.1.2 TDD
DRX configuration	1		Off
reportConfigType	1		periodic
reportQuantity	1		ssb-Index-RSRP
Number of reported RS	1		2
L1-RSRP reporting period	1	slot	80
T1	1	s	5
T2	1	s	1
EPRE ratio of PSS to SSS	1	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1		AWGN

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Table A.11.5.4.1.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
DL CCA Probability P_{CCA_DL} Note 4,6	1		0.9375	0.9375	0.9375	0.9375
DL CCA Probability P_{CCA_DL} Note 4,7	1		0.75/0.75	0.75/0.75	0.75/0.75	0.75/0.75
UL CCA probability P_{CCA_UL}	1		1.0	1.0	1.0	1.0
N_{oc} Note2	1	dBm/15kHz	-94.65			
N_{oc} Note2	1	dBm/SSB SCS	-91.65			
$\hat{E}_s / I_{ot}$	1	dB	0	0	-Infinity	3
SSB RSRP Note3	1	dBm/SSB SCS	-91.65	-91.65	-Infinity	-88.65
Io Note3	1	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.84
$\hat{E}_s / N_{oc}$	1	dB	0	0	-Infinity	3

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: DL and UL CCA probabilities apply for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

Note 5: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.

Note 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2}.

A.11.5.4.1.3 Test Requirements

The UE shall send L1-RSRP report every 80 slots. No later than 640 ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute accuracy requirement in clause 10.1.19.1.1 and relative accuracy requirement in clause 10.1.19.1.2. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.11.5.4.2 SSB based L1-RSRP measurement when DRX is used

A.11.5.4.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5A.4.1, with the testing configurations for NR cells in Table A.11.5.4.2.1-1.

Table A.11.5.4.2.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
1	With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.11.5.4.2.2 Test parameters

There is one cell in the test, the FR1 PCell (Cell 1). Cell 1 operates on a carrier frequency with CCA and transmits SSBs in DBT windows according to DL CCA model. The test parameters for the Cell 1 are given in Table A.11.5.4.2.2-1 and Table A.11.5.4.2.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The UE transmits the reporting according to UL CCA model. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.11.5.4.2.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1		freq1
DL CCA model	1		As specifieed in A.3.20.2.1
UL CCA model	1		As specified in A.3.20.2.2
Duplex mode	1		TDD
TDD Configuration	1		TDDConf.1.1 CCA
$BW_{channel}$	1	MHz	40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1		SR.1.1 CCA
RMSI CORESET Reference Channel	1		CR.1.1 CCA
Dedicated CORESET Reference Channel	1		CCR.1.1 CCA
SSB configuration	1		SSB.3 CCA for semi-static channel access SSB.4 CCA for dynamic channel access
OCNG Patterns	1		OP.1
Initial BWP Configuration	1		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1		DLBWP.1.1 ULBWP.1.1
DBT Window Configuration	1		DBT.1
TRS Configuration	1		TRS.1.2 TDD
DRX configuration	1		DRX.3
reportConfigType	1		periodic
reportQuantity	1		ssb-Index-RSRP
Number of reported RS	1		2
L1-RSRP reporting period	1	slot	80
T1	1	s	5

T2	1	s	1
EPRE ratio of PSS to SSS	1	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1		AWGN
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.			

Table A.11.5.4.2.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
DL CCA Probability P_{CCA_DL} Note 4,6	1		0.9375	0.9375	0.9375	0.9375
DL CCA Probability P_{CCA_DL} Note 4.7	1		0.75/0.75	0.75/0.75	0.75/0.75	0.75/0.75
UL CCA probability P_{CCA_UL}	1		1.0	1.0	1.0	1.0
N_{oc} Note2	1	dBm/15kHz	-94.65			
N_{oc} Note2	1	dBm/SSB SCS	-91.65			
$\hat{E}_s / I_{ot}$	1	dB	0	0	-Infinity	3
SSB RSRP Note3	1	dBm/SSB SCS	-91.65	-91.65	-Infinity	-88.65
Io Note3	1	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.84
$\hat{E}_s / N_{oc}$	1	dB	0	0	-Infinity	3

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: DL and UL CCA probabilities apply for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

Note 5: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.

Note 6:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 7:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2}.

A.11.5.4.2.3 Test Requirements

The UE shall send L1-RSRP report every 80 slots. No later than 640 ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute accuracy requirement in clause 10.1.19.1.1 and relative accuracy requirement in clause 10.1.19.1.2. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.11.5.4.3 SSB based L1-RSRP measurement on SCC when DRX is not used

A.11.5.4.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5A.4.1, with the testing configurations for NR cells in Table A.11.5.4.3.1-1.

Table A.11.5.4.3.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
1	With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.11.5.4.3.2 Test parameters

There are two cells in the test, the FR1 PCell (Cell 1) and FR1 SCell (Cell 2). Both Cell 1 and Cell 2 operate on a carrier frequency with CCA and transmits SSBs in DBT windows according to DL CCA model. The test parameters for the Cell 1 are given in Table A.11.5.4.3.2-1 and Table A.11.5.4.3.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The UE transmits the reporting according to UL CCA model. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.11.5.4.3.2-1: General test parameters

Parameter	Config	Unit	Value
Active PCell	1		Cell 1
Active SCell	1		Cell 2
RF Channel Number	1		1: Cell 1 2: Cell 2
DL CCA model	1		As specifieed in A.3.20.2.1

UL CCA model	1		As specified in A.3.20.2.2
Duplex mode	1		TDD
TDD Configuration	1		TDDConf.1.1 CCA
$BW_{channel}$	1	MHz	40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1		SR.1.1 CCA
RMSI CORESET Reference Channel	1		CR.1.1 CCA
Dedicated CORESET Reference Channel	1		CCR.1.1 CCA
SSB configuration	1		SSB.3 CCA for semi-static channel access SSB.4 CCA for dynamic channel access
OCNG Patterns	1		OP.1
Initial BWP Configuration	1		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1		DLBWP.1.1 ULBWP.1.1
DBT Window Configuration	1		DBT.1
TRS Configuration	1		TRS.1.2 TDD
DRX configuration	1		Off
reportConfigType	1		periodic
reportQuantity	1		ssb-Index-RSRP
Number of reported RS	1		2
L1-RSRP reporting period	1	slot	80
T1	1	s	5
T2	1	s	1
EPRE ratio of PSS to SSS	1	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1		AWGN
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.			

Table A.11.5.4.3.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2

DL CCA Probability P_{CCA_DL} Note 4,6	1		0.9375	0.9375	0.9375	0.9375
DL CCA Probability P_{CCA_DL} Note 4,7	1		0.75/0.75	0.75/0.75	0.75/0.75	0.75/0.75
UL CCA probability P_{CCA_UL}	1		1.0	1.0	1.0	1.0
N_{oc} Note2	1	dBm/15kHz	-94.65			
N_{oc} Note2	1	dBm/SSB SCS	-91.65			
$\hat{E}_s / I_{ot}$	1	dB	0	0	-Infinity	3
SSB RSRP Note3	1	dBm/SSB SCS	-91.65	-91.65	-Infinity	-88.65
Io Note3	1	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.84
$\hat{E}_s / N_{oc}$	1	dB	0	0	-Infinity	3

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: DL and UL CCA probabilities apply for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.
Note 5: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.
Note 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2}.

A.11.5.4.3.3 Test Requirements

The UE shall send L1-RSRP report every 80 slots. No later than 640 ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute accuracy requirement in clause 10.1.19.1.1 and relative accuracy requirement in clause 10.1.19.1.2. The rate of correct events observed during repeated tests shall be at least 90%.

The UE shall send L1-RSRP report of both SSB0 and SSB1 in Cell 2.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.11.5.4.4 SSB based L1-RSRP measurement on SCC when DRX is used

A.11.5.4.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5A.4.1, with the testing configurations for NR cells in Table A.11.5.4.4.1-1.

Table A.11.5.4.4.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
1	With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.11.5.4.4.2 Test parameters

There are two cells in the test, the FR1 PCell (Cell 1) and FR1 SCell (Cell 2). Both Cell 1 and Cell 2 operate on a carrier frequency with CCA and transmits SSBs in DBT windows according to DL CCA model. The test parameters for the Cell 1 are given in Table A.11.5.4.4.2-1 and Table A.11.5.4.4.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The UE transmits the reporting according to UL CCA model. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.11.5.4.4.2-1: General test parameters

Parameter	Config	Unit	Value
Active PCell	1		Cell 1
Active SCell	1		Cell 2
RF Channel Number	1		1: Cell 1 2: Cell 2
DL CCA model	1		As specifieed in A.3.20.2.1
UL CCA model	1		As specified in A.3.20.2.2
Duplex mode	1		TDD
TDD Configuration	1		TDDConf.1.1 CCA
$BW_{channel}$	1	MHz	40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1		SR.1.1 CCA
RMSI CORESET Reference Channel	1		CR.1.1 CCA
Dedicated CORESET Reference Channel	1		CCR.1.1 CCA
SSB configuration	1		SSB.3 CCA for semi-static channel access SSB.4 CCA for dynamic channel access
OCNG Patterns	1		OP.1
Initial BWP Configuration	1		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1		DLBWP.1.1 ULBWP.1.1
DBT Window Configuration	1		DBT.1
TRS Configuration	1		TRS.1.2 TDD
DRX configuration	1		DRX.3
reportConfigType	1		periodic
reportQuantity	1		ssb-Index-RSRP

Number of reported RS	1		2
L1-RSRP reporting period	1	slot	80
T1	1	s	5
T2	1	s	1
EPRE ratio of PSS to SSS	1	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1		AWGN
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.			

Table A.11.5.4.4.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
DL CCA Probability P_{CCA_DL} Note 4,6	1		0.9375	0.9375	0.9375	0.9375
DL CCA Probability P_{CCA_DL} Note 4.7	1		0.75/0.75	0.75/0.75	0.75/0.75	0.75/0.75
UL CCA probability P_{CCA_UL}	1		1.0	1.0	1.0	1.0
N_{oc} Note2	1	dBm/15kHz	-94.65			
N_{oc} Note2	1	dBm/SSB SCS	-91.65			
$\hat{E}_s / I_{ot}$	1	dB	0	0	-Infinity	3
SSB RSRP Note3	1	dBm/SSB SCS	-91.65	-91.65	-Infinity	-88.65
Io Note3	1	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.84
$\hat{E}_s / N_{oc}$	1	dB	0	0	-Infinity	3

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: DL and UL CCA probabilities apply for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

Note 5:	The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.
Note 6:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 7:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2}.

A.11.5.4.4.3 Test Requirements

The UE shall send L1-RSRP report every 80 slots. No later than 640 ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute accuracy requirement in clause 10.1.19.1.1 and relative accuracy requirement in clause 10.1.19.1.2. The rate of correct events observed during repeated tests shall be at least 90%.

The UE shall send L1-RSRP report of both SSB0 and SSB1 in Cell 2.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.11.6 Measurement performance

A.11.6.1 SS-RSRP

A.11.6.1.1 Intra-frequency measurement accuracy on a carrier frequency with CCA

A.11.6.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy on the carrier frequency with CCA is within the specified limits. This test will verify the requirements in clauses 10.1.36.1.1 and 10.1.36.1.2 for intra-frequency measurements under CCA.

A.11.6.1.1.2 Test parameters

In this set of test cases all cells are on the same carrier frequency with CCA and transmit SSBs in DBT windows according to DL CCA model. Supported test configurations are shown in table A.11.6.1.1.2-1. Both absolute and relative accuracy of SS-RSRP intra-frequency measurements are tested by using the parameters in A.11.6.1.1.2-2. In all test cases, Cell 1 is the PCell, and Cell 2 is the target cell.

Table A.11.6.1.1.2-1: SS-RSRP Intra frequency SS-RSRP supported test configurations

Config	Description
1	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Table A.11.6.1.1.2-2: SS-RSRP Intra frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
Cell ID			489	0	489	0	489	0
SSB ARFCN			freq1		freq1		freq1	
TDD configuration	Config 1		TDDConf.1.1 CCA					
$BW_{channel}$	Config 1	MHz	40: $N_{RB,c}$ = 106					
BWP BW	Config 1		40: $N_{RB,c}$ = 106					
DL CCA model			As specified in clause A.3.26.2.1					

UL CCA model				As specified in clause A.3.26.2.2					
P_{CCA_DL} for dynamic channel access Note 7,9				$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75					
P_{CCA_DL} for semi-static channel access Note 8,9				P_{CCA_DL}=0.9375					
P_{CCA_UL}				1					
Downlink initial BWP configuration				DLBWP.0.1					
Downlink dedicated BWP configuration				DLBWP.1.1					
Uplink initial BWP configuration				ULBWP.0.1					
Uplink dedicated BWP configuration				ULBWP.1.1					
TRS configuration	Config 1			TRS.1.2 TDD	NA	TRS.1.2 TDD	NA	TRS.1.2 TDD	NA
DRX Cycle			ms	Not Applicable					
PDSCH Reference measurement channel	Config 1			SR.1.1 CCA	-	SR.1.1 CCA	-	SR.1.1 CCA	-
RMSI CORESET Reference Channel	Config 1			CR.1.1 CCA	-	CR.1.1 CCA	-	CR.1.1 CCA	-
Control channel RMC	Config 1			CR.1.1 CCA	-	CR.1.1 CCA	-	CR.1.1 CCA	-
SSB configuration for semi-static channel access	Config 1			SSB.1 CCA	SSB.1 CCA	SSB.1 CCA	SSB.1 CCA	SSB.1 CCA	SSB.1 CCA
SSB configuration for dynamic channel access	Config 1			SSB.2 CCA	SSB.2 CCA	SSB.2 CCA	SSB.2 CCA	SSB.2 CCA	SSB.2 CCA
DBT window configuration	Config 1,2,3			DBT.1	DBT.1	DBT.1	DBT.1	DBT.1	DBT.1
Time offset with Cell 1	Config 1		µs	-	3	-	3	-	3
SMTC configuration	Config 1			SMTC.1					
OCNG Patterns				OCNG pattern 1					
PDSCH/PDCCH subcarrier spacing	Config 1		kHz	30 kHz					
EPRE ratio of PSS to SSS EPRE ratio of PBCH DMRS to SSS EPRE ratio of PBCH to PBCH DMRS EPRE ratio of PDCCH DMRS to SSS EPRE ratio of PDCCH to PDCCH DMRS EPRE ratio of PDSCH DMRS to SSS EPRE ratio of PDSCH to PDSCH EPRE ratio of OCNG DMRS to SSS(Note 1) EPRE ratio of OCNG to OCNG DMRS (Note 1)			dB	0	0	0	0	0	0
N_{oc} Note2	Config 1	NR_CCA_FR1_I		Not applicable Note 5		-94		-110	
		NR_CCA_FR1_J						-109.5	
N_{oc} Note2	Config 1	NR_CCA_FR1_I	dBm/SCS	Not applicable Note 5		-91		-107.0	
		NR_CCA_FR1_J						-106.5	
$\hat{E}_s/I_{ot}$ Note6			dB	2.46	-5.97	2.46	-5.97	-2.01	-3.54
$\hat{E}_s/N_{oc}$ Note6			dB	6	1	6	1	1	0
SS-RSRP Note3,6	Config 1	NR_CCA_FR1_I	dBm/SCS	Not applicable Note 5	Not applicable Note 5	-85	-90	-106.00	-107.00
		NR_CCA_FR1_J						-105.50	-106.50
Io Note3	Config 1	NR_CCA_FR1_I	dBm/38.16MHz	Not applicable Note 5		-51.99		-70.82	
		NR_CCA_FR1_J						-70.32	
Propagation condition			-	AWGN					
Antenna configuration				1x2					

NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
NOTE 5: Subtest 1 is not used when testing with 30kHz SSB SCS.
NOTE 6: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.
NOTE 7: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
NOTE 8: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
NOTE 9: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

A.11.6.1.1.3 Test Requirements

The SS-RSRP measurement accuracy for cell 1 and cell 2 shall fulfil absolute requirement in clause 10.1.36.1.1 and relative requirement in clause 10.1.36.1.2.

A.11.6.1.2 Intra-frequency measurement accuracy on SCC on a carrier frequency with CCA

A.11.6.1.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy on the carrier frequency with CCA is within the specified limits. This test will verify the requirements in clauses 10.1.36.1.1 and 10.1.36.1.2 for intra-frequency measurements under CCA.

A.11.6.1.2.2 Test parameters

Three cells are deployed in the test, which are FR1 PCell (Cell 1) on the carrier frequency with CCA, and two cells on the same carrier frequency with CCA and transmit SSBs in DBT windows according to DL CCA model: SCell (Cell 2) and a neighbour cell (Cell 3). Supported test configurations are shown in table A.11.6.1.2.2-1. Both absolute and relative accuracy of SS-RSRP intra-frequency measurements are tested by using the parameters in A.11.6.1.2.2-2.

Table A.11.6.1.2.2-1: SS-RSRP Intra frequency SS-RSRP supported test configurations

Config	Description
1	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Table A.11.6.1.2.2-2: SS-RSRP Intra frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 2	Cell 3	Cell 2	Cell 3	Cell 2	Cell 3
Cell ID			489	0	489	0	489	0
SSB ARFCN			freq1		freq1		freq1	
TDD configuration	Config 1		TDDConf.1.1 CCA					
$BW_{channel}$	Config 1	MHz	40: $N_{RB,c}$ = 106					
BWP BW	Config 1		40: $N_{RB,c}$ = 106					
DL CCA model			As specified in clause A.3.26.2.1					
UL CCA model			As specified in clause A.3.26.2.2					

P_{CCA_DL} for dynamic channel access Note 7,9				$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75					
P_{CCA_DL} for semi-static channel access Note 8,9				P_{CCA_DL}=0.9375					
P_{CCA_UL}				1					
Downlink initial BWP configuration				DLBWP.0.1					
Downlink dedicated BWP configuration				DLBWP.1.1					
Uplink initial BWP configuration				ULBWP.0.1					
Uplink dedicated BWP configuration				ULBWP.1.1					
TRS configuration	Config 1			TRS.1.2 TDD	NA	TRS.1.2 TDD	NA	TRS.1.2 TDD	NA
DRX Cycle			ms	Not Applicable					
PDSCH Reference measurement channel	Config 1			SR.1.1 CCA	-	SR.1.1 CCA	-	SR.1.1 CCA	-
RMSI CORESET Reference Channel	Config 1			CR.1.1 CCA	-	CR.1.1 CCA	-	CR.1.1 CCA	-
Control channel RMC	Config 1			CR.1.1 CCA	-	CR.1.1 CCA	-	CR.1.1 CCA	-
SSB configuration for semi-static channel access	Config 1			SSB.1 CCA	SSB.1 CCA	SSB.1 CCA	SSB.1 CCA	SSB.1 CCA	SSB.1 CCA
SSB configuration for dynamic channel access	Config 1			SSB.2 CCA	SSB.2 CCA	SSB.2 CCA	SSB.2 CCA	SSB.2 CCA	SSB.2 CCA
DBT window configuration	Config 1,2,3			DBT.1	DBT.1	DBT.1	DBT.1	DBT.1	DBT.1
Time offset with Cell 1	Config 1		µs	-	3	-	3	-	3
SMTC configuration	Config 1			SMTC.1					
OCNG Patterns				OCNG pattern 1					
PDSCH/PDCCH subcarrier spacing	Config 1		kHz	30 kHz					
EPRE ratio of PSS to SSS			dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2	Config 1	NR_CCA_FR1_I		Not applicable Note 5		-94		-110	
		NR_CCA_FR1_J						-109.5	
N_{oc} Note2	Config 1	NR_CCA_FR1_I	dBm/SCS	Not applicable Note 5		-91		-107.0	
		NR_CCA_FR1_J						-106.5	
$\hat{E}_s/I_{ot}$ Note6			dB	2.46	-5.97	2.46	-5.97	-2.01	-3.54
$\hat{E}_s/N_{oc}$ Note6			dB	6	1	6	1	1	0
SS-RSRP Note3	Config 1	NR_CCA_FR1_I	dBm/SCS	Not applicable Note 5	Not applicable Note 5	-85	-90	-106.00	-107.00
		NR_CCA_FR1_J						-105.50	-106.50
Io Note3	Config 1	NR_CCA_FR1_I	dBm/38.16MHz	Not applicable Note 5		-51.99		-70.82	
		NR_CCA_FR1_J						-70.32	
Propagation condition			-	AWGN					
Antenna configuration				1x2					
NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.									

NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
NOTE 5: Subtest 1 is not used when testing with 30kHz SSB SCS.
NOTE 6: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.
NOTE 7: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
NOTE 8: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
NOTE 9: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

A.11.6.1.2.3 Test Requirements

The SS-RSRP measurement accuracy for cell 2 and cell 3 shall fulfil absolute requirement in clause 10.1.36.1.1 and relative requirement in clause 10.1.36.1.2.

A.11.6.2 SS-RSRQ

A.11.6.2.1 Intra-frequency measurement accuracy

A.11.6.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.29.1.1.

A.11.6.2.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table A.11.6.2.1.2-1. The absolute accuracy of SS-RSRQ intra-frequency measurement is tested by using the parameters in Table A.11.6.2.1.2-2. In all test cases, Cell 1 is the PCell with CCA and Cell 2 is the target cell with CCA. Three sub-tests (Test 1, Test 2, and Test 3) are provided different N_{oc} on Cells 1 and 2.

Table A.11.6.2.1.2-1: SS-RSRQ Intra frequency SS-RSRQ supported test configurations

Config	Description
1	With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.11.6.2.1.2-2: SS-RSRQ Intra frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1		freq1		freq1	
DL CCA model	Config 1		As specified in clause A.3.26.2.1					
UL CCA model	Config 1		As specified in clause A.3.26.2.2					
UL CCA probability	P_{CCA_UL}		1.0	-	1.0	-	1.0	-
DL CCA probability for semi-static channel access Note 7, 8	P_{CCA_DL}		0.9375	-	0.9375	-	0.9375	-
DL CCA probability for dynamic channel access Note 8, 9	$P_{CCA_DL_1}$		0.75	-	0.75	-	0.75	-
	$P_{CCA_DL_2}$		0.75	-	0.75	-	0.75	-

Duplex mode	Config 1		TDD						
TDD configuration	Config 1		TDDConf.1.1 CCA						
$BW_{channel}$	Config 1	MHz	40: $N_{RB,c}$ = 106						
Gap Pattern ID			0						
BWP configuration	Initial DL BWP		DLBWP.0.1						
	Dedicated DL BWP		DLBWP.1.1						
	Initial UL BWP		ULBWP.0.1						
	Dedicated UL BWP		ULBWP.1.1						
DRX Cycle		ms	Not Applicable						
PDSCH Reference measurement channel	Config 1		SR1.1 CCA		SR1.1 CCA		SR1.1 CCA		
RMSI CORESET Reference Channel	Config 1		CR.1.1 CCA		CR.1.1 CCA		CR.1.1 CCA		
Control Channel RMC	Config 1		CCR.1.1 CCA		CCR.1.1 CCA		CCR.1.1 CCA		
TRS Configuration	Config 1		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD		
OCNG Patterns			OP. 1						
SS-RSSI-Measurement			Not Applicable						
Time offset with Cell 1	Config 1	µs	-	3	-	3	-	3	
DBT Window configuration	Config 1		DBT.1						
SSB configuration	Config 1		SSB.1 CCA for semi-static channel access SSB.2 CCA for dynamic channel access						
SMTC configuration	Config 1		SMTC.1						
PDSCH/PDCCH subcarrier spacing	Config 1	kHz	30 kHz						
EPRE ratio of PSS to SSS		dB	0	0	0	0	0	0	
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2		NR_CCA_FR1_I	dBm/15kHz	-91		-		-110	
		NR_CCA_FR1_J						-109.5	
N_{oc} Note2	Config 1	NR_CCA_FR1_I	dBm/SCS	-88		-		-107	
		NR_CCA_FR1_J						-106.5	
$\hat{E}_s/I_{ot}$			dB	-1.76		-4.7		-5.46	-5.46
$\hat{E}_s/N_{oc}$			dB	3	3	-2.9	-2.9	-4	-4
SS-RSRP Note3	Config 1	NR_CCA_FR1_I		-85	-85	-	-	-111	-111
		NR_CCA_FR1_J						-110.5	-110.5
SS-RSRQ Note3		NR_CCA_FR1_I	dB	-14.77	-14.77	-16.76	-16.76	-17.34	-17.34
		NR_CCA_FR1_J							
Io Note3	Config 1	NR_CCA_FR1_I	dBm/38.16MHz	-50		-		-73.4	
		NR_CCA_FR1_J						-72.9	
Propagation condition			-	AWGN	AWGN	AWGN	AWGN	AWGN	AWGN
Antenna configuration				1x2	1x2	1x2	1x2	1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRQ, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: NR operating band groups are as defined in clause 3.5.2.
Note 6: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configuration
Note 7: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 8: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 9: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

A.11.6.2.1.3 Test Requirements

The SS-RSRQ measurement accuracy shall fulfil the requirements in clause 10.1.29.1.1.

A.11.6.2.2 Inter-frequency measurement accuracy

A.11.6.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.30.1.1 and 10.1.30.1.2.

A.11.6.2.2.2 Test Parameters

In this test case the two cells (i.e., Cell 1 and Cell 2) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.11.6.2.2.2-1. Both absolute accuracy and relative accuracy requirements of SS-RSRQ inter-frequency measurement are tested by using test parameters in Table A.11.6.2.2.2-2. In all test cases, Cell 1 is the PCell with CCA and Cell 2 is target cell with CCA. Three sub-tests (Test 1, Test 2, and Test 3) are provided different N_{oc} on Cells 1 and 2.

Table A.11.6.2.2.2-1: SS-RSRQ Inter frequency SS-RSRQ supported test configurations

Config	Description
1	With CCA: NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.11.6.2.2.2-2: SS-RSRQ Inter frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1	freq2	freq1	freq2	freq1	freq2
DL CCA model	Config 1		As specified in clause A.3.26.2.1					
UL CCA model	Config 1		As specified in clause A.3.26.2.2					
UL CCA probability	P_{CCA_UL}		1.0	-	1.0	-	1.0	-
DL CCA probability for semi-static channel access Note 7, 8	P_{CCA_DL}		0.9375	-	0.9375	-	0.9375	-
DL CCA probability for dynamic channel access Note 8, 9	$P_{CCA_DL_1}$		0.75	-	0.75	-	0.75	-
	$P_{CCA_DL_2}$		0.75	-	0.75	-	0.75	-
Duplex mode	Config 1		TDD					
TDD configuration	Config 1		TDDConf.1.1 CCA					

$BW_{channel}$	Config 1	MHz	40: $N_{RB,c}$ = 106						
Gap pattern ID	Config 1		0						
BWP BW	Config 1		40: NRB,c = 106						
DRX Cycle		ms	Not Applicable						
PDSCH Reference measurement channel	Config 1		SR.1.1 CCA		SR.1.1 CCA		SR.1.1 CCA		
RMSI CORESET Reference Channel	Config 1		CR.1.1 CCA		CR.1.1 CCA		CR.1.1 CCA		
Dedicated CORESET Reference Channel	Config 1		CCR.1 .1 CCA		CCR.1. 1 CCA		CCR.1. 1 CCA		
TRS Configuration	Config 1		TRS.1. 2 TDD		TRS.1. 2 TDD		TRS.1. 2 TDD		
OCNG Patterns			OCNG pattern 1						
Time offset with Cell 1	Config 1	µs	-	3	-	3	-	3	
DBT Window configuration	Config 1		DBT.1						
SSB configuration	Config 1		SSB.1 CCA for semi-static channel access SSB.2 CCA for dynamic channel access						
SMTC configuration	Config 1		SMTC.1						
PDSCH/PDCCH subcarrier spacing	Config 1	kHz	30 kHz						
EPRE ratio of PSS to SSS		dB	0	0	0	0	0	0	
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2		NR_CCA_FR1_I	dBm/15kHz	-86.27		-113		-112	
		NR_CCA_FR1_J						-111.5	
N_{oc} Note2	Config 1	NR_CCA_FR1_I	dBm/SCS	-83.27		-110		-109	
		NR_CCA_FR1_J						-108.5	
$\hat{E}_s / I_{ot}$			dB	-1.75		-1.75		3	-1.75
$\hat{E}_s / N_{oc}$			dB	-1.75		-1.75		3	-1.75
SS-RSRP Note3	Config 1	NR_CCA_FR1_I		-85.02	-85.02	-111.75	-111.75	-106	-110.75
		NR_CCA_FR1_J						-105.5	-110-.25
SS-RSRQ Note3		NR_CCA_FR1_I	dB	-14.77	-14.77	-40.59	-40.59	12.56	14.76
		NR_CCA_FR1_J							
Io Note3	Config 1	NR_CCA_FR1_I	dBm/SCS	-50		-76.73		-73.19	-75.73
		NR_CCA_FR1_J						-72.69	-75.23
Propagation condition			-	AWGN	AWGN	AWGN	AWGN	AWGN	AWGN
Antenna configuration				1x2	1x2	1x2	1x2	1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRQ, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: NR operating band groups are as defined in clause 3.5.2.

Note 6: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configuration.
Note 7: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 8: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 9: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

A.11.6.2.2.3 Test Requirements

The SS-RSRQ measurement accuracy shall fulfil the requirements in clause 10.1.30.1.1 and 10.1.30.1.2.

A.11.6.2.3 Intra-frequency measurement accuracy on SCC

A.11.6.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.29.1.1.

A.11.6.2.3.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table A.11.6.2.3.2-1. The absolute accuracy of SS-RSRQ intra-frequency measurement is tested by using the parameters in Table A.11.6.2.3.2-2. In all test cases, Cell 1 is the PCell with CCA, Cell 2 is the SCell with CCA, and Cell 3 is the target cell with CCA. Three sub-tests (Test 1, Test 2, and Test 3) are provided different N_{oc} on Cells 1, 2, and 3.

Table A.11.6.2.3.2-1: SS-RSRQ Intra frequency SS-RSRQ supported test configurations

Config	Description
1	With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.11.6.2.3.2-2: SS-RSRQ Intra frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1 / Cell 2	Cell 3	Cell 1 / Cell 2	Cell 3	Cell 1 / Cell 2	Cell 3
SSB ARFCN			freq1 for Cell 1 freq2 for Cell 2	freq2	freq1 for Cell 1 freq2 for Cell 2	freq2	freq1 for Cell 1 freq2 for Cell 2	freq2
DL CCA model	Config 1		As specified in clause A.3.26.2.1					
UL CCA model	Config 1		As specified in clause A.3.26.2.2					
UL CCA probability	P_{CCA_UL}		1.0	-	1.0	-	1.0	-
DL CCA probability for semi-static channel access Note 7, 8	P_{CCA_DL}		0.9375	-	0.9375	-	0.9375	-
DL CCA probability for dynamic channel access Note 8, 9	$P_{CCA_DL_1}$		0.75	-	0.75	-	0.75	-
	$P_{CCA_DL_2}$		0.75	-	0.75	-	0.75	-
Duplex mode	Config 1		TDD					
TDD configuration	Config 1		TDDConf.1.1 CCA					
$BW_{channel}$	Config 1	MHz	40: $N_{RB,c}$ = 106					

Gap Pattern ID			0						
BWP configuration	Initial DL BWP		DLBWP.0.1						
	Dedicated DL BWP		DLBWP.1.1						
	Initial UL BWP		ULBWP.0.1						
	Dedicated UL BWP		ULBWP.1.1						
DRX Cycle		ms	Not Applicable						
PDSCH Reference measurement channel	Config 1		SR1.1 CCA		SR1.1 CCA		SR1.1 CCA		
RMSI CORESET Reference Channel	Config 1		CR.1.1 CCA		CR.1.1 CCA		CR.1.1 CCA		
Control Channel RMC	Config 1		CCR.1.1 CCA		CCR.1.1 CCA		CCR.1.1 CCA		
TRS Configuration	Config 1		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD		
OCNG Patterns			OP. 1						
SS-RSSI-Measurement			Not Applicable						
Time offset with Cell 1	Config 1	µs	3 (for Cell 2)	3	3 (for Cell 2)	3	3 (for Cell 2)	3	
DBT Window configuration	Config 1		DBT.1						
SSB configuration	Config 1		SSB.1 CCA for semi-static channel access SSB.2 CCA for dynamic channel access						
SMTC configuration	Config 1		SMTC.1						
CSI-RS for tracking	Config 1		TRS.1.2 TDD						
PDSCH/PDCCH subcarrier spacing	Config 1	kHz	30 kHz						
EPRE ratio of PSS to SSS		dB	0	0	0	0	0	0	
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2		NR_CCA_FR1_I	dBm/15kHz	-91		-		-110	
		NR_CCA_FR1_J						-109.5	
N_{oc} Note2	Config 1	NR_CCA_FR1_I	dBm/SCS	-88		-		-107	
		NR_CCA_FR1_J						-106.5	
$\hat{E}_s/I_{ot}$			dB	-1.76		-4.7		-5.46	-5.46
$\hat{E}_s/N_{oc}$			dB	3	3	-2.9	-2.9	-4	-4
SS-RSRP Note3	Config 1	NR_CCA_FR1_I		-85	-85	-	-	-111	-111
		NR_CCA_FR1_J						-110.5	-110.5
SS-RSRQ Note3		NR_CCA_FR1_I	dB	-14.77	-14.77	-16.76	-16.76	-17.34	-17.34
		NR_CCA_FR1_J							
Io Note3	Config 1	NR_CCA_FR1_I	dBm/38.16MHz	-50		-		-73.4	
		NR_CCA_FR1_J						-72.9	
Propagation condition			-	AWGN	AWGN	AWGN	AWGN	AWGN	AWGN
Antenna configuration				1x2	1x2	1x2	1x2	1x2	1x2

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRQ, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	NR operating band groups are as defined in clause 3.5.2.
Note 6:	For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configuration.
Note 7:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 8:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 9:	For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

A.11.6.2.3.3 Test Requirements

The SS-RSRQ measurement accuracy shall fulfil the requirements in clause 10.1.29.1.1.

A.11.6.2.4 Inter-frequency measurement accuracy

A.11.6.2.4.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.30.1.1 and 10.1.30.1.2.

A.11.6.2.4.2 Test Parameters

In this test case the two cells (i.e., Cell 1 and Cell 2) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.11.6.2.4.2-1. Both absolute accuracy and relative accuracy requirements of SS-RSRQ inter-frequency measurement are tested by using test parameters in Table A.11.6.2.4.2-2 and A.11.6.2.4.2-3. In all test cases, Cell 1 is the PCell and Cell 2 is target cell with CCA. Three sub-tests (Test 1, Test 2, and Test 3) are provided different N_{oc} on Cells 1 and 2.

Table A.11.6.2.4.2-1: SS-RSRQ Inter frequency SS-RSRQ supported test configurations

Config	Description
1	Without CCA: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	Without CCA: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
3	Without CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.11.6.2.4.2-2: SS-RSRQ Inter frequency test parameters

Parameter		Unit	Test 1	Test 2	Test 3
			Cell 2	Cell 2	Cell 2
SSB ARFCN			freq2	freq2	freq2
DL CCA model	Config 1, 2, 3		As specified in clause A.3.26.2.1		
UL CCA model	Config 1, 2, 3		As specified in clause A.3.26.2.2		
UL CCA probability	P_{CCA_UL}		1.0		
DL CCA probability for semi-static channel access Note 7, 8	P_{CCA_DL}		0.9375		
DL CCA probability for	$P_{CCA_DL_1}$		0.75		

dynamic channel access Note 8, 9						
		$P_{CCA_DL_2}$		0.75		
Duplex mode		Config 1, 2, 3		TDD		
TDD configuration		Config 1, 2, 3		TDDConf.1.1 CCA		
$BW_{channel}$		Config 1, 2, 3	MHz	40: $N_{RB,c}$ = 106		
Gap pattern ID		Config 1, 2, 3		0		
BWP BW		Config 1, 2, 3		40: NRB,c = 106		
DRX Cycle			ms	Not Applicable		
OCNG Patterns				OCNG pattern 1		
Time offset with Cell 1		Config 1, 2, 3	µs	3		
DBT Window configuration		Config 1, 2, 3		DBT.1		
SSB configuration		Config 1, 2, 3		SSB.1 CCA for semi-static channel access SSB.2 CCA for dynamic channel access		
SMTC configuration		Config 1, 2, 3		SMTC.1		
PDSCH/PDCCH subcarrier spacing		Config 1, 2, 3	kHz	30 kHz		
EPRE ratio of PSS to SSS			dB	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		NR_CCA_FR1_I	dBm/15kHz	-86.27	-113	-112
		NR_CCA_FR1_J				-111.5
N_{oc} Note2	Config 1, 2, 3	NR_CCA_FR1_I	dBm/SCS	-83.27	-110	-109
		NR_CCA_FR1_J				-108.5
$\hat{E}_s / I_{ot}$			dB	-1.75	-1.75	-1.75
$\hat{E}_s / N_{oc}$			dB	-1.75		-1.75
SS-RSRP Note3	Config 1, 2, 3	NR_CCA_FR1_I		-85.02	-111.75	-110.75
		NR_CCA_FR1_J				-110-.25
SS-RSRQ Note3		NR_CCA_FR1_I	dB	-14.77	-40.59	14.76
		NR_CCA_FR1_J				
Io Note3	Config 1, 2, 3	NR_CCA_FR1_I	dBm/SCS	-50	-76.73	-75.73
		NR_CCA_FR1_J				-75.23
Propagation condition			-	AWGN	AWGN	AWGN
Antenna configuration				1x2	1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRQ, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: NR operating band groups are as defined in clause 3.5.2.

Note 6: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configuration.
Note 7: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 8: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 9: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

Table A.11.6.2.4.2-3: SS-RSRQ Intra frequency test parameters for NR PCell

Parameter		Unit	Test 1	Test 2	Test 3
			Cell 1	Cell 1	Cell 1
SSB ARFCN			freq1		
Duplex mode	Config 1		FDD		
	Config 2,3		TDD		
TDD configuration	Config 1		Not Applicable		
	Config 2		TDDConf.1.1		
	Config 3		TDDConf.2.1		
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52		
	Config 2		10: $N_{RB,c}$ = 52		
	Config 3		40: $N_{RB,c}$ = 106		
Gap Pattern ID			0		
BWP configuration	Initial DL BWP		DLBWP.0.1		
	Dedicated DL BWP		DLBWP.1.1		
	Initial UL BWP		ULBWP.0.1		
	Dedicated UL BWP		ULBWP.1.1		
DRX Cycle		ms	Not Applicable		
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD		
	Config 2		SR.1.1 TDD		
	Config 3		SR2.1 TDD		
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD		
	Config 2		CR.1.1 TDD		
	Config 3		CR.2.1 TDD		
Control Channel RMC	Config 1		CCR.1.1 FDD		
	Config 2		CCR.1.1 TDD		
	Config 3		CCR.2.1 TDD		
TRS Configuration	Config 1		TRS.1.1 FDD		
	Config 2		TRS.1.1 TDD		
	Config 3		TRS.1.2 TDD		
OCNG Patterns			OP. 1		
SS-RSSI-Measurement			Not Applicable		
SMTC configuration	Config 1		SMTC.2		
	Config 2,3		SMTC.1		
SSB configuration	Config 1,2		SSB.1 FR1		
	Config 3		SSB.2 FR1		
CSI-RS for tracking	Config 1		TRS.1.1 FDD		
	Config 2		TRS.1.1 TDD		
	Config 3		TRS.1.2 TDD		

PDSCH/PDCCH subcarrier spacing		Config 1,2	kHz	15 kHz		
		Config 3		30 kHz		
EPRE ratio of PSS to SSS			dB	0		
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/15kHz	-85	-101	-114
		NR_FDD_FR1_B				-113.5
		NR_TDD_FR1_C				-113
		NR_FDD_FR1_D, NR_TDD_FR1_D				-112.5
		NR_FDD_FR1_E, NR_TDD_FR1_E				-112
		NR_FDD_FR1_F				-111.5
		NR_FDD_FR1_G				-111
		NR_FDD_FR1_H				-110.5
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-91	-	-114
		NR_FDD_FR1_B				-113.5
		NR_TDD_FR1_C				-113
		NR_FDD_FR1_D, NR_TDD_FR1_D				-112.5
		NR_FDD_FR1_E, NR_TDD_FR1_E				-112
		NR_FDD_FR1_F				-111.5
		NR_FDD_FR1_G				-111
		NR_FDD_FR1_H				-110.5
N_{oc} Note2	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/SCS	-85	-101	-114
		NR_FDD_FR1_B				-113.5
		NR_TDD_FR1_C				-113
		NR_FDD_FR1_D, NR_TDD_FR1_D				-112.5
		NR_FDD_FR1_E, NR_TDD_FR1_E				-112
		NR_FDD_FR1_F				-111.5
		NR_FDD_FR1_G				-111
		NR_FDD_FR1_H				-110.5
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-88	-	-111

		NR_FDD_FR1_B				-110.5
		NR_TDD_FR1_C				-110
		NR_FDD_FR1_D, NR_TDD_FR1_D				-109.5
		NR_FDD_FR1_E, NR_TDD_FR1_E				-109
		NR_FDD_FR1_F				-108.5
		NR_FDD_FR1_G				-108
		NR_FDD_FR1_H				-107.5
$\hat{E}_s/I_{ot}$			dB	-1.76	-4.7	-5.46
$\hat{E}_s/N_{oc}$			dB	3	-2.9	-4
SS-RSRP Note 3	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/SCS	-82	-103.9	-118
		NR_FDD_FR1_B				-117.5
		NR_TDD_FR1_C				-117
		NR_FDD_FR1_D, NR_TDD_FR1_D				-116.5
		NR_FDD_FR1_E, NR_TDD_FR1_E				-116
		NR_FDD_FR1_F				-115.5
		NR_FDD_FR1_G				-115
		NR_FDD_FR1_H				-114.5
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-85	-	-115
		NR_FDD_FR1_B				-114.5
		NR_TDD_FR1_C				-114
		NR_FDD_FR1_D, NR_TDD_FR1_D				-113.5
		NR_FDD_FR1_E, NR_TDD_FR1_E				-113
		NR_FDD_FR1_F				-112.5
		NR_FDD_FR1_G				-112
		NR_FDD_FR1_H				-111.5
SS-RSRQ Note3		NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dB	-14.77	-16.76	-17.34
		NR_FDD_FR1_B				
		NR_TDD_FR1_C				
		NR_FDD_FR1_D, NR_TDD_FR1_D				
		NR_FDD_FR1_E, NR_TDD_FR1_E				
		NR_FDD_FR1_F				
		NR_FDD_FR1_G				
		NR_FDD_FR1_H				
Io Note3	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 9.36MHz	-50	-70	-83.5
		NR_FDD_FR1_B				-83
		NR_TDD_FR1_C				-82.5

		NR_FDD_FR1_D, NR_TDD_FR1_D				-82
		NR_FDD_FR1_E, NR_TDD_FR1_E				-81.5
		NR_FDD_FR1_F				-81
		NR_FDD_FR1_G				-80.5
		NR_FDD_FR1_H				-80
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 38.16MHz	-50	-	-77.4
		NR_FDD_FR1_B				-76.9
		NR_TDD_FR1_C				-76.4
		NR_FDD_FR1_D, NR_TDD_FR1_D				-75.9
		NR_FDD_FR1_E, NR_TDD_FR1_E				-75.4
		NR_FDD_FR1_F				-74.9
		NR_FDD_FR1_G				-74.4
		NR_FDD_FR1_H				-73.9
Propagation condition			-	AWGN	AWGN	AWGN
Antenna configuration				1x2	1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRQ, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: NR operating band groups are as defined in clause 3.5.2.

Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

A.11.6.2.4.3 Test Requirements

The SS-RSRQ measurement accuracy shall fulfil the requirements in clause 10.1.30.1.1 and 10.1.30.1.2.

A.11.6.3 SS-SINR

A.11.6.3.1 Intra-frequency measurement accuracy

A.11.6.3.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.31.1.1.

A.11.6.3.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table A.11.6.3.1.2-1. The absolute accuracy of SS-SINR intra-frequency measurement is tested by using the parameters in

Table A.11.6.3.1.2-2. In all test cases, Cell 1 is the PCell with CCA and Cell 2 is the target cell with CCA. Two sub-tests (Test 1 and Test 2) are provided different N_{oc} on Cells 1 and 2.

Table A.11.6.3.1.2-1: SS-SINR Intra frequency SS-SINR supported test configurations

Config	Description
1	With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.11.6.3.1.2-2: SS-SINR Intra frequency test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1		freq1	
DL CCA model	Config 1		As specified in clause A.3.26.2.1			
UL CCA model	Config 1		As specified in clause A.3.26.2.2			
UL CCA probability	P_{CCA_UL}		1.0	-	1.0	-
DL CCA probability for semi-static channel access Note 7, 8	P_{CCA_DL}		0.9375	-	0.9375	-
DL CCA probability for dynamic channel access Note 8, 9	$P_{CCA_DL_1}$		0.75	-	0.75	-
	$P_{CCA_DL_2}$		0.75	-	0.75	-
Duplex mode	Config 1		TDD			
TDD configuration	Config 1		TDDConf.1.1 CCA			
Downlink initial BWP configuration			DLBWP.0.1			
Downlink dedicated BWP configuration			DLBWP.1.1			
Uplink initial BWP configuration			ULBWP.0.1			
Uplink dedicated BWP configuration			ULBWP.1.1			
DRX Cycle configuration		ms	Not Applicable			
TRS configuration	Config 1		TRS.1.2 TDD		TRS.1.2 TDD	
PDSCH Reference measurement channel	Config 1		SR.1.1 CCA		SR.1.1 CCA	
RMSI CORESET Reference Channel	Config 1		CR.1.1 CCA		CR.1.1 CCA	
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 CCA		CCR.1.1 CCA	
OCNG Patterns			OP.1			
SS-RSSI-Measurement			Not Applicable			
DBT Window configuration	Config 1		DBT.1			
Time offset with Cell 1	Config 1	µs	-	3	-	3
SSB configuration	Config 1		SSB.1 CCA for semi-static channel access SSB.2 CCA for dynamic channel access			
SMTC configuration	Config 1		SMTC.1			
PDSCH/PDCCH subcarrier spacing	Config 1	kHz	30			
EPRE ratio of PSS to SSS		dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						

EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		NR_CCA_FR1_I	dBm/15kHz	-93		-112	
		NR_CCA_FR1_J				-111.5	
N_{oc} Note2	Config 1	NR_CCA_FR1_I	dBm/SCS	-90		-109	
		NR_CCA_FR1_J				-108.5	
$\hat{E}_s / I_{ot}$			dB	0	-3.19	-5.46	-5.46
$\hat{E}_s / N_{oc}$			dB	4.54	2.66	-4	-4
SS-RSRP Note3	Config 1	NR_CCA_FR1_I	dBm/SCS	-85.46	-87.34	-113	-113
		NR_CCA_FR1_J				-112.5	-112.5
SS-SINR Note3		NR_CCA_FR1_I	dB	0	-3.19	-5.46	-5.46
		NR_CCA_FR1_J					
Io Note3	Config 1	NR_CCA_FR1_I	dBm/38.16MHz	-51.41		-75.41	
		NR_CCA_FR1_J				-74.91	
Propagation condition			-	AWGN			
Antenna configuration			-	1x2			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: NR operating band groups are as defined in clause 3.5.2.

Note 6: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configuration.

Note 7: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 8: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.

Note 9: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

A.11.6.3.1.3 Test Requirements

The SS-SINR measurement accuracy shall fulfil the requirements in clause 10.1.31.1.1.

A.11.6.3.2 Inter-frequency measurement accuracy

A.11.6.3.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1.32.1.1 and 10.1.32.1.2.

A.11.6.3.2.2 Test Parameters

In this test case the two cells (i.e., Cell 1 and Cell 2) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.11.6.3.2.2-1. Both absolute accuracy and relative accuracy requirements of SS-SINR inter-frequency measurement are tested by using test parameters in Table A.11.6.3.2.2-2. In all test cases, Cell 1 is the PCell with CCA and Cell 2 is target cell with CCA. Three sub-tests (Test 1, Test 2, and Test 3) are provided different N_{oc} on Cells 1 and 2.

Table A.11.6.3.2.2-1: SS-SINR Inter frequency SS-SINR supported test configurations

Config	Description
1	With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.11.6.3.2.2-2: SS-SINR Inter frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1	freq2	freq1	freq2	freq1	freq2
DL CCA model	Config 1		As specified in clause A.3.26.2.1					
UL CCA model	Config 1		As specified in clause A.3.26.2.2					
UL CCA probability	P_{CCA_UL}		1.0	-	1.0	-	1.0	-
DL CCA probability for semi-static channel access Note 7, 8	P_{CCA_DL}		0.9375	-	0.9375	-	0.9375	-
DL CCA probability for dynamic channel access Note 8, 9	$P_{CCA_DL_1}$		0.75	-	0.75	-	0.75	-
	$P_{CCA_DL_2}$		0.75	-	0.75	-	0.75	-
Duplex mode	Config 1		TDD					
TDD configuration	Config 1		TDDConf.1.1 CCA					
Downlink initial BWP configuration			DLBWP.0.1					
Downlink dedicated BWP configuration			DLBWP.1.1					
Uplink initial BWP configuration			ULBWP.0.1					
Uplink dedicated BWP configuration			ULBWP.1.1					
DRX Cycle configuration		ms	Not Applicable					
Gap pattern ID			0	-	0	-	0	-
TRS configuration	Config 1		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD	
PDSCH Reference measurement channel	Config 1		SR.1.1 CCA		SR.1.1 CCA		SR.1.1 CCA	
RMSI CORESET Reference Channel	Config 1		CR.1.1 CCA		CR.1.1 CCA		CR.1.1 CCA	
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 CCA		CCR.1.1 CCA		CCR.1.1 CCA	
OCNG Patterns			OP.1					
SS-RSSI-Measurement			Not Applicable					
Time offset with Cell 1	Config 1	µs	-	3	-	3	-	3
DBT Window configuration	Config 1		DBT.1					
SSB configuration	Config 1		SSB.1 CCA for semi-static channel access SSB.2 CCA for dynamic channel access					
SMTC configuration	Config 1		SMTC.1					
PDSCH/PDCCH subcarrier spacing	Config 1	kHz	30					
EPRE ratio of PSS to SSS		dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} Note2	NR_CCA_FR1_I	dBm/15kHz	-88		-108.5		-115.5	
	NR_CCA_FR1_J						-115	

N_{oc} Note2	Config 1	NR_CCA_FR1_I	dBm/SCS	-85		-105.5		-112.5	
		NR_CCA_FR1_J						-112	
$\hat{E}_s / I_{ot}$			dB	-1.75	-1.75	20	20	-4.0	-4.0
$\hat{E}_s / N_{oc}$			dB	-1.75		20		-4.0	
SS-RSRP Note3	Config 1	NR_CCA_FR1_I	dBm/SCS	-86.75		-85.5		-116.5	
		NR_CCA_FR1_J						-116	
SS-SINR Note3		NR_CCA_FR1_I	dB	-1.75		20		-4.0	
		NR_CCA_FR1_J							
Io Note3	Config 1	NR_CCA_FR1_I	dBm/ 38.16MHz	-51.73		-54.41		-80	
		NR_CCA_FR1_J						-79.5	
Propagation condition			-	AWGN					
Antenna configuration			-	1x2					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: NR operating band groups are as defined in clause 3.5.2.
Note 6: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configuration.
Note 7: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 8: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 9: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

A.11.6.3.2.3 Test Requirements

The SS-SINR measurement accuracy shall fulfil the requirements in clause 10.1.32.1.1 and 10.1.32.1.2.

A.11.6.3.3 Intra-frequency measurement accuracy on SCC

A.11.6.3.3.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.31.1.1.

A.11.6.3.3.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table A.11.6.3.3.2-1. The absolute accuracy of SS-SINR intra-frequency measurement is tested by using the parameters in Table A.11.6.3.3.2-2. In all test cases, Cell 1 is the PCell with CCA, Cell 2 is the SCell with CCA, and Cell 3 is the target cell with CCA. Two sub-tests (Test 1 and Test 2) are provided different N_{oc} on Cells 1, 2, and 3.

Table A.11.6.3.3.2-1: SS-SINR Intra frequency SS-SINR supported test configurations

Config	Description
1	With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.11.6.3.3.2-2: SS-SINR Intra frequency test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 1 / Cell 2	Cell 3	Cell 1 / Cell 2	Cell 3
SSB ARFCN			freq1 for Cell 1 freq2 for Cell 2	freq2	freq1 for Cell 1 freq2 for Cell 2	freq2
DL CCA model	Config 1		As specified in clause A.3.26.2.1			
UL CCA model	Config 1		As specified in clause A.3.26.2.2			
UL CCA probability	P_{CCA_UL}		1.0	-	1.0	-
DL CCA probability for semi-static channel access Note 7, 8	P_{CCA_DL}		0.9375	-	0.9375	-
DL CCA probability for dynamic channel access Note 8, 9	$P_{CCA_DL_1}$		0.75	-	0.75	-
	$P_{CCA_DL_2}$		0.75	-	0.75	-
Duplex mode	Config 1		TDD			
TDD configuration	Config 1		TDDConf.1.1 CCA			
Downlink initial BWP configuration			DLBWP.0.1			
Downlink dedicated BWP configuration			DLBWP.1.1			
Uplink initial BWP configuration			ULBWP.0.1			
Uplink dedicated BWP configuration			ULBWP.1.1			
DRX Cycle configuration		ms	Not Applicable			
TRS configuration	Config 1		TRS.1.2 TDD		TRS.1.2 TDD	
PDSCH Reference measurement channel	Config 1		SR.1.1 CCA		SR.1.1 CCA	
RMSI CORESET Reference Channel	Config 1		CR.1.1 CCA		CR.1.1 CCA	
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 CCA		CCR.1.1 CCA	
OCNG Patterns			OP.1			
SS-RSSI-Measurement			Not Applicable			
DBT Window configuration	Config 1		DBT.1			
Time offset with Cell 1	Config 1	μs	3 (for Cell 2)	3	3 (for Cell 2)	3
SSB configuration	Config 1		SSB.1 CCA for semi-static channel access SSB.2 CCA for dynamic channel access			
SMTC configuration	Config 1		SMTC.1			
PDSCH/PDCCH subcarrier spacing	Config 1	kHz	30			
EPRE ratio of PSS to SSS		dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						

N_{oc} Note2		NR_CCA_FR1_I	dBm/15kHz	-93		-112	
		NR_CCA_FR1_J				-111.5	
N_{oc} Note2	Config 1	NR_CCA_FR1_I	dBm/SCS	-90		-109	
		NR_CCA_FR1_J				-108.5	
$\hat{E}_s / I_{ot}$			dB	0	-3.19	-5.46	-5.46
$\hat{E}_s / N_{oc}$			dB	4.54	2.66	-4	-4
SS-RSRP Note3	Config 1	NR_CCA_FR1_I	dBm/SCS	-85.46	-87.34	-113	-113
		NR_CCA_FR1_J				-112.5	-112.5
SS-SINR Note3		NR_CCA_FR1_I	dB	0	-3.19	-5.46	-5.46
		NR_CCA_FR1_J					
Io Note3	Config 1	NR_CCA_FR1_I	dBm/38.16MHz	-51.41		-75.41	
		NR_CCA_FR1_J				-74.91	
Propagation condition			-	AWGN			
Antenna configuration			-	1x2			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: NR operating band groups are as defined in clause 3.5.2.

Note 6: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configuration.

Note 7: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 8: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.

Note 9: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

A.11.6.3.3.3 Test Requirements

The SS-SINR measurement accuracy shall fulfil the requirements in clause 10.1.31.1.1.

A.11.6.3.4 Inter-frequency measurement accuracy

A.11.6.3.4.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1.32.1.1 and 10.1.32.1.2.

A.11.6.3.4.2 Test Parameters

In this test case the two cells (i.e., Cell 1 and Cell 2) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.11.6.3.4.2-1. Both absolute accuracy and relative accuracy requirements of SS-SINR inter-frequency measurement are tested by using test parameters in Table A.11.6.3.4.2-2 and Table A.11.6.3.4.2-3. In all test cases, Cell 1 is the PCell and Cell 2 is target cell with CCA. Three sub-tests (Test 1, Test 2, and Test 3) are provided different N_{oc} on Cells 1 and 2.

Table A.11.6.3.4.2-1: SS-SINR Inter frequency SS-SINR supported test configurations

Config	Description
1	Without CCA: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	Without CCA: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
3	Without CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.11.6.3.4.2-2: SS-SINR Inter frequency test parameters

Parameter			Unit	Test 1	Test 2	Test 3
				Cell 2	Cell 2	Cell 2
SSB ARFCN				freq2	freq2	freq2
DL CCA model		Config 1		As specified in clause A.3.26.2.1		
UL CCA model		Config 1		As specified in clause A.3.26.2.2		
UL CCA probability		P_{CCA_UL}		1.0		
DL CCA probability for semi-static channel access Note 7, 8		P_{CCA_DL}		0.9375		
DL CCA probability for dynamic channel access Note 8, 9		$P_{CCA_DL_1}$		0.75		
		$P_{CCA_DL_2}$		0.75		
Duplex mode		Config 1		TDD		
TDD configuration		Config 1		TDDConf.1.1 CCA		
Downlink initial BWP configuration				DLBWP.0.1		
Downlink dedicated BWP configuration				DLBWP.1.1		
Uplink initial BWP configuration				ULBWP.0.1		
Uplink dedicated BWP configuration				ULBWP.1.1		
DRX Cycle configuration			ms	Not Applicable		
Gap pattern ID				-		
OCNG Patterns				OP.1		
SS-RSSI-Measurement				Not Applicable		
Time offset with Cell 1		Config 1	μs	3		
DBT Window configuration		Config 1		DBT.1		
SSB configuration		Config 1		SSB.1 CCA for semi-static channel access SSB.2 CCA for dynamic channel access		
SMTC configuration		Config 1		SMTC.1		
PDSCH/PDCCH subcarrier spacing		Config 1	kHz	30		
EPRE ratio of PSS to SSS			dB	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		NR_CCA_FR1_I	dBm/15kHz	-88	-108.5	-115.5
		NR_CCA_FR1_J				-115
N_{oc} Note2	Config 1	NR_CCA_FR1_I	dBm/SCS	-85	-105.5	-112.5

		NR_CCA_FR1_J				-112
$\hat{E}_s/I_{ot}$			dB	-1.75	20	-4.0
$\hat{E}_s/N_{oc}$			dB	-1.75	20	-4.0
SS-RSRP Note3	Config 1	NR_CCA_FR1_I	dBm/SCS	-86.75	-85.5	-116.5
		NR_CCA_FR1_J				-116
SS-SINR Note3		NR_CCA_FR1_I	dB	-1.75	20	-4.0
		NR_CCA_FR1_J				
Io Note3	Config 1	NR_CCA_FR1_I	dBm/ 38.16MHz	-51.73	-54.41	-80
		NR_CCA_FR1_J				-79.5
Propagation condition			-	AWGN		
Antenna configuration			-	1x2		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: NR operating band groups are as defined in clause 3.5.2.

Note 6: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configuration.

Note 7: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 8: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.

Note 9: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

Table A.11.6.3.4.2-3: SS-SINR Inter frequency test parameters for NR PCell

Parameter		Unit	Test 1	Test 2	Test 3
			Cell 1	Cell 1	Cell 1
SSB ARFCN			freq1	freq1	freq1
Duplex mode	Config 1		FDD		
	Config 2,3		TDD		
TDD configuration	Config 1		Not Applicable		
	Config 2		TDDConf.1.1		
	Config 3		TDDConf.2.1		
Downlink initial BWP configuration			DLBWP.0.1		
Downlink dedicated BWP configuration			DLBWP.1.1		
Uplink initial BWP configuration			ULBWP.0.1		
Uplink dedicated BWP configuration			ULBWP.1.1		
DRX Cycle configuration		ms	Not Applicable		
Gap pattern ID			0		
TRS configuration	Config 1		TRS.1.1 FDD		
	Config 2		TRS.1.1 TDD		
	Config 3		TRS.1.2 TDD		

PDSCH Reference measurement channel		Config 1		SR.1.1 FDD		
		Config 2		SR.1.1 TDD		
		Config 3		SR2.1 TDD		
RMSI CORESET Reference Channel		Config 1		CR.1.1 FDD		
		Config 2		CR.1.1 TDD		
		Config 3		CR2.1 TDD		
Dedicated CORESET Reference Channel		Config 1		CCR.1.1 FDD		
		Config 2		CCR.1.1 TDD		
		Config 3		CCR2.1 TDD		
OCNG Patterns				OP.1		
SS-RSSI-Measurement				Not Applicable		
SMTC configuration		Config 1		SMTC pattern 2		
		Config 2,3		SMTC pattern 1		
SSB configuration		Config 1,2		SSB.1 FR1		
		Config 3		SSB.2 FR1		
PDSCH/PDCCH subcarrier spacing		Config 1,2	kHz	15		
		Config 3		30		
EPRE ratio of PSS to SSS			dB	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	Config 1,2	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/15 kHz	-88	-108.5	-119.5
		NR_FDD_FR1_B				-119
		NR_TDD_FR1_C				-118.5
		NR_FDD_FR1_D NR_TDD_FR1_D				-118
		NR_FDD_FR1_E NR_TDD_FR1_E				-117.5
		NR_FDD_FR1_F				-117
		NR_FDD_FR1_G				-116.5
		NR_FDD_FR1_H				-116
N_{oc} Note2	Config 1,2		dBm/SCS	-88	-108.5	Same as Noc for 15kHz
	Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6		-85	-105.5	-116.5
		NR_FDD_FR1_B				-116
		NR_TDD_FR1_C				-115.5
		NR_FDD_FR1_D NR_TDD_FR1_D				-115
		NR_FDD_FR1_E NR_TDD_FR1_E				-114.5
		NR_FDD_FR1_F				-114
		NR_FDD_FR1_G				-114.5
		NR_FDD_FR1_H				-113

$\hat{E}_s/I_{ot}$			dB	-1.75	20	-4.0
$\hat{E}_s/N_{oc}$			dB	-1.75	20	-4.0
SS-RSRP Note3	Config 1,2	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/SCS	-89.75	-88.5	-123.5
		NR_FDD_FR1_B				-123
		NR_TDD_FR1_C				-122.5
		NR_FDD_FR1_D NR_TDD_FR1_D				-122
		NR_FDD_FR1_E NR_TDD_FR1_E				-121.5
		NR_FDD_FR1_F				-121
		NR_FDD_FR1_G				-120.5
		NR_FDD_FR1_H				-120
	Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6		-86.75	-85.5	-120.5
		NR_FDD_FR1_B				-120
		NR_TDD_FR1_C				-119.5
		NR_FDD_FR1_D NR_TDD_FR1_D				-119
		NR_FDD_FR1_E NR_TDD_FR1_E				-118.5
		NR_FDD_FR1_F				-118
		NR_FDD_FR1_G				-117.5
		NR_FDD_FR1_H				-117
SS-SINR Note3		NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dB	-1.75	20	-4.0
		NR_FDD_FR1_B				
		NR_TDD_FR1_C				
		NR_FDD_FR1_D NR_TDD_FR1_D				
		NR_FDD_FR1_E NR_TDD_FR1_E				
		NR_FDD_FR1_F				
		NR_FDD_FR1_G				
		NR_FDD_FR1_H				
Io Note3	Config 1,2	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/9.36MHz	-57.83	-60.5	-90.09
		NR_FDD_FR1_B				-89.59
		NR_TDD_FR1_C				-89.09
		NR_FDD_FR1_D NR_TDD_FR1_D				-88.59
		NR_FDD_FR1_E NR_TDD_FR1_E				-88.09
		NR_FDD_FR1_F				-87.59
		NR_FDD_FR1_G				-87.09
		NR_FDD_FR1_H				-86.59
	Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/38.16MHz	-51.73	-54.41	-84
		NR_FDD_FR1_B				-83.5
		NR_TDD_FR1_C				-83
		NR_FDD_FR1_D NR_TDD_FR1_D				-82.5
		NR_FDD_FR1_E				-82

		NR_TDD_FR1_E				
		NR_FDD_FR1_F				-81.5
		NR_FDD_FR1_G				-81
		NR_FDD_FR1_H				-80.5
Propagation condition			-	AWGN		
Antenna configuration			-	1x2		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						
Note 5: NR operating band groups are as defined in clause 3.5.2.						
Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.						

A.11.6.3.4.3 Test Requirements

The SS-SINR measurement accuracy shall fulfil the requirements in clause 10.1.32.1.1 and 10.1.32.1.2.

A.11.6.4 L1-RSRP measurement for beam reporting with CCA serving cell

A.11.6.4.1 SSB based L1-RSRP measurement

A.11.6.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.33.1 for L1-RSRP measurements based on SSB with the testing configurations for NR cells in Table A.11.6.4.1.1-1.

Table A.11.6.4.1.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
1	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.11.6.4.1.2 Test parameters

In this set of test cases there one cell in the test, PCell under CCA (Cell 1). Cell 1 operates on a carrier frequency with CCA and transmits SSBs in DBT window according to DL CCA model.

Two sub-tests (Test 1 and Test 2) are provided with different N_{oc} on Cell 1. The test parameters for the Cell 1 are given in Table A.11.6.4.1.2-1 below. The absolute and relative accuracy of L1-RSRP measurements are tested by using the parameters in Table A.11.6.4.1.2-1.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

There is no measurement gap configured in the test. Before the test, UE is configured one SSB resource set with two SSB resources. UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSB resources 0 and 1.

Table A.11.6.4.1.2-1: FR1 SSB based L1-RSRP test parameters

Parameter		Config	Unit	Test 1	Test 2
SSB GSCN		1		freq1	freq1
DL CCA model		1		As specifieed in A.3.20.2.1	As specifieed in A.3.20.2.1
UL CCA model		1		As specified in A.3.20.2.2	As specified in A.3.20.2.2
Duplex mode		1		TDD	TDD
TDD configuration		1		TDDConf.1.1 CCA	TDDConf.1.1 CCA
$BW_{channel}$		1	MHz	40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel		1		SR.1.1 CCA	SR.1.1 CCA
RMSI CORESET Reference Channel		1		CR.1.1 CCA	CR.1.1 CCA
Dedicated CORESET Reference Channel		1		CCR.1.1 CCA	CCR.1.1 CCA
SSB configuration Semi-static channel access		1		SSB.3 CCA	SSB.3 CCA
SSB configuration for Dynamic channel access		1		SSB.4 CCA	SSB.4 CCA
OCNG Patterns		1		OP.1	OP.1
Initial BWP Configuration		1		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
TRS configuration		1		TRS.1.2 TDD	TRS.1.2 TDD
Dedicated BWP configuration		1		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
DBT Window Configuration		1		DBT.1	DBT.1
reportConfigType		1		periodic	periodic
reportQuantity		1		ssb-Index-RSRP	ssb-Index-RSRP
Number of reported RS		1		2	2
L1-RSRP reporting period		1		slot80	slot80
EPRE ratio of PSS to SSS		1	dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
N_{oc} Note2	NR_TDD_FR1_I	1	dBm/15kHz	-94.65	[-113]
N_{oc} Note2	NR_TDD_FR1_I	1	dBm/SCS	-91.65	[-110]
$\hat{E}_s / I_{ot}$		1	dB	10	-3
SS-RSRP Note3	NR_TDD_FR1_I	1	dBm/SCS	-81.65	[-113]
Io Note3	NR_TDD_FR1_I	1	dBm/ 38.16MHz	-50.19	[-77.19]
$\hat{E}_s / N_{oc}$		1	dB	10	-3
Propagation condition		1		AWGN	AWGN
Antenna configuration		1		1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					

Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

A.11.6.4.1.3 Test Requirements

In both Test 1 and Test 2, the L1-RSRP measurement accuracy for SSB#0 and SSB#1 of Cell 1 shall fulfil the requirements in clauses 10.1.33.1.

A.11.6.5 RSSI

A.11.6.5.1 Intra-frequency RSSI measurement accuracy on PCC with CCA

A.11.6.5.1.1 Test Purpose and Environment

The purpose of this test is to verify that the RSSI measurement accuracy is within the specified limits. This test will partially verify the RSSI measurement accuracy requirements in Section 10.1.34.1.

A.11.6.5.1.2 Test parameters

In all test cases, Cell 1 is the PCell with CCA. RSSI is measured on channel number 1. Supported test configurations are shown in table A.11.6.5.1.2-1. The accuracy of RSSI intra-frequency measurements is tested by using the parameters in A.11.6.5.1.2-2 and A.11.6.5.1.2-3.

Table A.11.6.5.1.2-1: Intra frequency RSSI supported test configurations

Configuration	Description
1	NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, bandwidth 40 MHz

Table A.11.6.5.1.2-2: RSSI Intra frequency test parameters

Parameter		Configurations	Unit	Test 1
				Cell 1
RF Channel Number				1
$BW_{channel}$			MHz	40
SSB configuration	Semi-static channel access Note 1, 3	1		SSB.1 CCA
	Dynamic channel access Note 2, 3	1		SSB.2 CCA
P_{CCA_DL}				TBD
P_{CCA_UL}				TBD
DL CCA model				As specifieed in A.3.20.2.1
UL CCA model				As specified in A.3.20.2.2
Measurement bandwidth			n_{PRB}	Same as channel access bandwidth
Channel access bandwidth			MHz	20
DRX Cycle configuration			ms	Not Applicable

PDSCH Reference measurement channel			SR.1.1 CCA
RMSI CORESET Reference Channel			CR.1.1 CCA
Dedicated CORESET Reference Channel			CCR.1.1 CCA
OCNG Patterns			OP.1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-106
N_{oc} in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-87
$\hat{E}_s / I_{ot}$ in slots not corresponding to RSSI measurement time configuration (RMTC)		dB	2.5
$\hat{E}_s / I_{ot}$ in slots corresponding to RSSI measurement time configuration (RMTC)		dB	-Infinity
SS-RSRP in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-103.5
SS-RSRP in slots corresponding to RSSI measurement time configuration (RMTC)			-Infinity
Io within measurement bandwidth in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/BW	-101.6
Io within measurement bandwidth in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/BW	-87
Propagation condition		-	AWGN
Note 1: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 2: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. Note 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.			

Table A.11.6.5.1.2-3: RSSI RMTC parameters

measDurationSymbols-r16	sym14or12
rmtc-Periodicity-r16	ms40
rmtc-SubframeOffset-r16	20
ref-SCS-CP-r16	kHz15
ReportInterval	ms120

A.11.6.5.1.3 Test Requirements

The average RSSI measurement accuracy shall fulfil the requirements in sections 10.1.34.1. The nominal RSSI used to evaluate the requirement shall be based on Io in slots corresponding to RSSI measurement time configuration (RMTC).

A.11.6.5.2 Intra-frequency RSSI measurement accuracy on SCC with CCA

A.11.6.5.2.1 Test Purpose and Environment

The purpose of this test is to verify that the RSSI measurement accuracy is within the specified limits. This test will partially verify the RSSI measurement accuracy requirements in Section 10.1.34.1.

A.11.6.5.2.2 Test parameters

In all test cases, Cell 1 which is PCell operating on a carrier frequency under CCA, and Cell 2 which is SCell operating on a carrier frequency under CCA. RSSI is measured on channel number 2. Supported test configurations are shown in table A.11.6.5.2.2-1. The accuracy of RSSI intra-frequency measurements is tested by using the parameters in A.11.6.5.2.2-2 and A.11.6.5.2.2-3.

Table A.11.6.5.2.2-1: Intra frequency RSSI supported test configurations

Configuration	Description
1	NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, bandwidth 40 MHz

Table A.11.6.5.2.2-2: RSSI Intra frequency test parameters

Parameter		Configurations	Unit	Test 1	
				Cell 1	Cell 2
RF Channel Number				1	2
$BW_{channel}$			MHz	40	40
SSB configuration	Semi-static channel access Note 1, 3	1		SSB.1 CCA	SSB.1 CCA
	Dynamic channel access Note 2, 3	1		SSB.2 CCA	SSB.2 CCA
P_{CCA_DL}				1	TBD
P_{CCA_UL}				1	TBD
DL CCA model				N/A	As specifieed in A.3.20.2.1
UL CCA model				N/A	As specified in A.3.20.2.2
Measurement bandwidth			n_{PRB}	Same as channel access bandwidth	
Channel access bandwidth			MHz	20	
DRX Cycle configuration			ms	Not Applicable	
PDSCH Reference measurement channel				SR.1.1 CCA	SR.1.1 CCA
RMSI CORESET Reference Channel				CR.1.1 CCA	CR.1.1 CCA
Dedicated CORESET Reference Channel				CCR.1.1 CCA	CCR.1.1 CCA
OCNG Patterns				OP.1	OP.1
EPRE ratio of PSS to SSS			dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					

EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-106	-106
N_{oc} in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-106	-87
$\hat{E}_s / I_{ot}$ in slots not corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	2.5
$\hat{E}_s / I_{ot}$ in slots corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	-Infinity
SS-RSRP in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-103.5	-103.5
SS-RSRP in slots corresponding to RSSI measurement time configuration (RMTC)			-103.5	-Infinity
Io within measurement bandwidth in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/BW	-101.6	-101.6
Io within measurement bandwidth in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/BW	-101.6	-87
Propagation condition		-	AWGN	

Note 1: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 2: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

Table A.11.6.5.2.2-3: RSSI RMTC parameters

measDurationSymbols-r16	sym14or12
rmtc-Periodicity-r16	ms40
rmtc-SubframeOffset-r16	20
ref-SCS-CP-r16	kHz15
ReportInterval	ms120

A.11.6.5.2.3 Test Requirements

The average RSSI measurement accuracy shall fulfil the requirements in sections 10.1.34.1. The nominal RSSI used to evaluate the requirement shall be based on Io in slots corresponding to RSSI measurement time configuration (RMTC).

A.11.6.5.3 Inter-frequency RSSI measurement accuracy on a carrier with CCA

A.11.6.5.3.1 Test Purpose and Environment

The purpose of this test is to verify that the RSSI measurement accuracy is within the specified limits. This test will partially verify the RSSI measurement accuracy requirements in Section 10.1.34.2.

A.11.6.5.3.2 Test parameters

In all test cases, Cell 1 which is PCell operating on a carrier frequency under CCA, and Cell 2 which is neighbor cell operating on a carrier frequency under CCA. RSSI is measured on channel number 2. Supported test configurations are shown in table A.11.6.5.3.2-1. The accuracy of RSSI intra-frequency measurements is tested by using the parameters in A.11.6.5.3.2-2 and A.11.6.5.3.2-3.

Table A.11.6.5.3.2-1: Inter frequency RSSI supported test configurations

Configuration	Description
1	NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, bandwidth 40 MHz

Table A.11.6.5.3.2-2: RSSI Inter frequency test parameters

Parameter		Configurations	Unit	Test 1	
				Cell 1	Cell 2
RF Channel Number				1	2
$BW_{channel}$			MHz	40	40
SSB configuration	Semi-static channel access Note 1, 3	1		SSB.1 CCA	SSB.1 CCA
	Dynamic channel access Note 2, 3	1		SSB.2 CCA	SSB.2 CCA
P_{CCA_DL}				1	TBD
P_{CCA_UL}				1	TBD
DL CCA model				N/A	As specifieed in A.3.20.2.1
UL CCA model				N/A	As specified in A.3.20.2.2
Measurement bandwidth			n_{PRB}	Same as channel access bandwidth	
Channel access bandwidth			MHz	20	
DRX Cycle configuration			ms	Not Applicable	
PDSCH Reference measurement channel				SR.1.1 CCA	SR.1.1 CCA
RMSI CORESET Reference Channel				CR.1.1 CCA	CR.1.1 CCA
Dedicated CORESET Reference Channel				CCR.1.1 CCA	CCR.1.1 CCA
OCNG Patterns				OP.1	OP.1
EPRE ratio of PSS to SSS			dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					

EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-106	-106
N_{oc} in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-106	-87
$\hat{E}_s / I_{ot}$ in slots not corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	2.5
$\hat{E}_s / I_{ot}$ in slots corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	-Infinity
SS-RSRP in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-103.5	-103.5
SS-RSRP in slots corresponding to RSSI measurement time configuration (RMTC)			-103.5	-Infinity
Io within measurement bandwidth in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/BW	-101.6	-101.6
Io within measurement bandwidth in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/BW	-101.6	-87
Propagation condition		-	AWGN	

Note 1: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 2: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

Table A.11.6.5.3.2-3: RSSI RMTC parameters

measDurationSymbols-r16	sym14or12
rmtc-Periodicity-r16	ms40
rmtc-SubframeOffset-r16	20
ref-SCS-CP-r16	kHz15
ReportInterval	ms120

A.11.6.5.3.3 Test Requirements

The average RSSI measurement accuracy shall fulfil the requirements in sections 10.1.34.2. The nominal RSSI used to evaluate the requirement shall be based on Io in slots corresponding to RSSI measurement time configuration (RMTC).

A.11.6.6 Channel occupancy

A.11.6.6.1 Intra-frequency channel occupancy measurement accuracy on PCC with CCA

A.11.6.6.1.1 Test Purpose and Environment

The purpose of this test is to verify that the channel occupancy measurement accuracy is within the specified limits. This test will partially verify the channel occupancy measurement accuracy requirements in Section 10.1.35.1.

A.11.6.6.1.2 Test parameters

In all test cases, Cell 1 is the PCell with CCA. channel occupancy is measured on channel number 1. Supported test configurations are shown in table A.11.6.6.1.2-1. The accuracy of channel occupancy intra-frequency measurements is tested by using the parameters in A.11.6.6.1.2-2 and A.11.6.6.1.2-3.

Table A.11.6.6.1.2-1: Intra frequency CO supported test configurations

Configuration	Description
1	NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, bandwidth 40 MHz

Table A.11.6.6.1.2-2: CO Intra frequency test parameters

Parameter		Configurations	Unit	Test 1
				Cell 1
RF Channel Number				1
$BW_{channel}$			MHz	40
SSB configuration	Semi-static channel access Note 1, 3	1		SSB.1 CCA
	Dynamic channel access Note 2, 3	1		SSB.2 CCA
P_{CCA_DL}				TBD
P_{CCA_UL}				TBD
DL CCA model				As specifieed in A.3.20.2.1
UL CCA model				As specified in A.3.20.2.2
Measurement bandwidth			n_{PRB}	Same as channel access bandwidth
Channel access bandwidth			MHz	20
DRX Cycle configuration			ms	Not Applicable
PDSCH Reference measurement channel				SR.1.1 CCA
RMSI CORESET Reference Channel				CR.1.1 CCA
Dedicated CORESET Reference Channel				CCR.1.1 CCA
OCNG Patterns				OP.1
EPRE ratio of PSS to SSS			dB	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				

N_{oc} in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-106
N_{oc} in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-87
$\hat{E}_s/I_{ot}$ in slots not corresponding to RSSI measurement time configuration (RMTC)		dB	2.5
$\hat{E}_s/I_{ot}$ in slots corresponding to RSSI measurement time configuration (RMTC)		dB	-Infinity
SS-RSRP in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-103.5
SS-RSRP in slots corresponding to RSSI measurement time configuration (RMTC)			-Infinity
Io within measurement bandwidth in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/BW	-101.6
Io within measurement bandwidth in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/BW	-87
Propagation condition		-	AWGN
channelOccupancyThreshold		dBm	-83
Note 1: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 2: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. Note 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.			

Table A.11.6.6.1.2-3: CO RMTC parameters

measDurationSymbols-r16	sym14or12
rmtc-Periodicity-r16	ms40
rmtc-SubframeOffset-r16	20
ref-SCS-CP-r16	kHz15
ReportInterval	ms120

A.11.6.6.1.3 Test Requirements

The nominal reported *channelOccupancy* shall be TBD. At least 90% of channel occupancy reports made by the UE shall indicate this value.

A.11.6.6.2 Intra-frequency channel occupancy measurement accuracy on SCC with CCA

A.11.6.6.2.1 Test Purpose and Environment

The purpose of this test is to verify that the channel occupancy measurement accuracy is within the specified limits. This test will partially verify the channel occupancy measurement accuracy requirements in Section 10.1.35.1.

A.11.6.6.2.2 Test parameters

In all test cases, Cell 1 which is PCell operating on a carrier frequency under CCA, and Cell 2 which is SCell operating on a carrier frequency under CCA. Channel occupancy is measured on channel number 2. Supported test configurations are shown in table A.11.6.6.2.2-1. The accuracy of channel occupancy intra-frequency measurements is tested by using the parameters in A.11.6.6.2.2-2 and A.11.6.6.2.2-3.

Table A.11.6.6.2.2-1: Intra frequency CO supported test configurations

Configuration	Description
1	NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, bandwidth 40 MHz

Table A.11.6.6.2.2-2: CO Intra frequency test parameters

Parameter		Configurations	Unit	Test 1	
				Cell 1	Cell 2
RF Channel Number				1	2
$BW_{channel}$			MHz	40	40
SSB configuration	Semi-static channel access Note 1, 3	1		SSB.1 CCA	SSB.1 CCA
	Dynamic channel access Note 2, 3	1		SSB.2 CCA	SSB.2 CCA
P_{CCA_DL}				1	TBD
P_{CCA_UL}				1	TBD
DL CCA model				N/A	As specifieed in A.3.20.2.1
UL CCA model				N/A	As specified in A.3.20.2.2
Measurement bandwidth			n_{PRB}	Same as channel access bandwidth	
Channel access bandwidth			MHz	20	
DRX Cycle configuration			ms	Not Applicable	
PDSCH Reference measurement channel				SR.1.1 CCA	SR.1.1 CCA
RMSI CORESET Reference Channel				CR.1.1 CCA	CR.1.1 CCA
Dedicated CORESET Reference Channel				CCR.1.1 CCA	CCR.1.1 CCA
OCNG Patterns				OP.1	OP.1
EPRE ratio of PSS to SSS			dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} in slots not corresponding to RSSI measurement time configuration (RMTC)			dBm/SCS	-106	-106
N_{oc} in slots corresponding to RSSI measurement time configuration (RMTC)			dBm/SCS	-106	-87

$\hat{E}_s/I_{ot}$ in slots not corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	2.5
$\hat{E}_s/I_{ot}$ in slots corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	-Infinity
SS-RSRP in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-103.5	-103.5
SS-RSRP in slots corresponding to RSSI measurement time configuration (RMTC)			-103.5	-Infinity
Io within measurement bandwidth in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/BW	-101.6	-101.6
Io within measurement bandwidth in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/BW	-101.6	-87
Propagation condition		-	AWGN	
channelOccupancyThreshold		dBm	-83	
Note 1: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 2: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. Note 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.				

Table A.11.6.6.2.2-3: CO RMTC parameters

measDurationSymbols-r16	sym14or12
rmtc-Periodicity-r16	ms40
rmtc-SubframeOffset-r16	20
ref-SCS-CP-r16	kHz15
ReportInterval	ms120

A.11.6.6.2.3 Test Requirements

The nominal reported *channelOccupancy s*hall be TBD. At least 90% of channel occupancy reports made by the UE shall indicate this value.

A.11.6.6.3 Inter-frequency channel occupancy measurement accuracy on a carrier with CCA

A.11.6.6.3.1 Test Purpose and Environment

The purpose of this test is to verify that the channel occupancy measurement accuracy is within the specified limits. This test will partially verify the channel occupancy measurement accuracy requirements in Section 10.1.34.2.

A.11.6.6.3.2 Test parameters

In all test cases, Cell 1 which is PCell operating on a carrier frequency under CCA, and Cell 2 which is neighbor cell operating on a carrier frequency under CCA. Channel occupancy is measured on channel number 2. Supported test configurations are shown in table A.11.6.6.3.2-1. The accuracy of channel occupancy intra-frequency measurements is tested by using the parameters in A.11.6.6.3.2-2 and A.11.6.6.3.2-3.

Table A.11.6.6.3.2-1: Inter frequency CO supported test configurations

Configuration	Description
1	NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, bandwidth 40 MHz

Table A.11.6.6.3.2-2: CO Inter frequency test parameters

Parameter		Configurations	Unit	Test 1	
				Cell 1	Cell 2
RF Channel Number				1	2
$BW_{channel}$			MHz	40	40
SSB configuration	Semi-static channel access Note 1, 3	1		SSB.1 CCA	SSB.1 CCA
	Dynamic channel access Note 2, 3	1		SSB.2 CCA	SSB.2 CCA
P_{CCA_DL}				1	TBD
P_{CCA_UL}				1	TBD
DL CCA model				N/A	As specifieed in A.3.20.2.1
UL CCA model				N/A	As specified in A.3.20.2.2
Measurement bandwidth			n_{PRB}	Same as channel access bandwidth	
Channel access bandwidth			MHz	20	
DRX Cycle configuration			ms	Not Applicable	
PDSCH Reference measurement channel				SR.1.1 CCA	SR.1.1 CCA
RMSI CORESET Reference Channel				CR.1.1 CCA	CR.1.1 CCA
Dedicated CORESET Reference Channel				CCR.1.1 CCA	CCR.1.1 CCA
OCNG Patterns				OP.1	OP.1
EPRE ratio of PSS to SSS			dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} in slots not corresponding to RSSI measurement time configuration (RMTC)			dBm/SCS	-106	-106
N_{oc} in slots corresponding to RSSI measurement time configuration (RMTC)			dBm/SCS	-106	-87

$\hat{E}_s/I_{ot}$ in slots not corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	2.5
$\hat{E}_s/I_{ot}$ in slots corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	-Infinity
SS-RSRP in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-103.5	-103.5
SS-RSRP in slots corresponding to RSSI measurement time configuration (RMTC)			-103.5	-Infinity
Io within measurement bandwidth in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/BW	-101.6	-101.6
Io within measurement bandwidth in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/BW	-101.6	-87
Propagation condition		-	AWGN	
channelOccupancyThreshold		dBm	-83	
Note 1: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 2: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. Note 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.				

Table A.11.6.6.3.2-3: CO RMTC parameters

measDurationSymbols-r16	sym14or12
rmtc-Periodicity-r16	ms40
rmtc-SubframeOffset-r16	20
ref-SCS-CP-r16	kHz15
ReportInterval	ms120

A.11.6.6.3.3 Test Requirements

The nominal reported *channelOccupancy s*hall be TBD. At least 90% of channel occupancy reports made by the UE shall indicate this value.

A.11.6.7 E-UTRAN RSRP

A.11.6.8 E-UTRAN RSRQ

A.11.6.9 E-UTRAN SINR

A.12 E-UTRA Standalone Tests with at Least One NR Cell under CCA

A.12.1 RRC_IDLE state mobility

A.12.1.1 Inter-RAT cell re-selection to NR on a carrier frequency with CCA

A.12.1.1.1 E-UTRA Cell reselection to higher priority NR target Cell in FR1 when target cell is subject to CCA

A.12.1.1.1.1 Test Purpose and Environment

This test is to verify the requirement for the E-UTRAN to NR inter-RAT cell subject to CCA reselection requirements specified in clause 4.2.2.5.7 in TS 36.133 [15].

The test scenario comprises of 1 E-UTRA cell and 1 NR cell subject to CCA as given in tables A.12.1.1.1.1-1, A.8.2.1.1.1-2, A.8.2.1.1.1-3 and A.8.2.1.1.1-4. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. E-UTRA cell 1 is already identified by the UE prior to the start of the test. Cell 2 is of higher priority than cell 1.

Table A.12.1.1.1.1-1: Supported test configurations

Configuration	Description of a cell without CCA	Description of a cell with CCA
1	LTE FDD	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	LTE TDD	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations		

Table A.12.1.1.1.1-2: General test parameters for E-UTRA cell re-selection FR1 NR cell subject to CCA test case

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell2	The UE camps on cell 2 in the initial phase
	Neighbour cell		1, 2	Cell1	
T1 end condition	Active cell			Cell1	During T1 period the UE reselects to cell 1
	Neighbour cell			Cell2	
T3 end condition	Active cell		1, 2	Cell2	The UE shall perform reselection to cell 2 during T3
	Neighbour cell		1, 2	Cell1	

RF Channel Number		1, 2	1, 2	E-UTRAN radio channel (1) and NR radio channel (2) are used for this test
Time offset between cells		1, 2	3 μs	Synchronous cells
Access Barring Information	-	1, 2	Not Sent	No additional delays in random access procedure.
DBT Window Configuration		1, 2	TBD	As specified in clause A.3.28.1.
DL CCA model		1, 2	As specified in clause A.3.20.2.1	DL CCA model
UL CCA model		1, 2	As specified in clause A.3.20.2.2	UL CCA model
DRX cycle length	s	1, 2	1.28	The value shall be used for all cells in the test.
NR PRACH configuration index		1, 2	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
T1	s	1, 2	TBD	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2	s	1, 2	TBD	During T2, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T3.
T3	s	1, 2	TBD	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.12.1.1.1.1-3: Cell specific test parameters for NR cell 2 subject to CCA

Parameter	Unit	Test configuration	Cell 2		
			T1	T2	T3
TDD configuration		1, 2	TBD		
DL CCA probability P_{CCA_DL}		1, 2	TBD		
UL CCA probability P_{CCA_UL}		1, 2	TBD		
$M_{d,max}$		1, 2	16		
$M_{m,max}$		1, 2	4		
$M_{e,max}$		1, 2	8		
PDSCH Reference measurement channel		1, 2	TBD		
RMSI CORESET Reference Channel		1, 2	TBD		
RMC CORESET Reference Channel		1, 2	TBD		
OCNG Patterns		1, 2	OP.1		
SSB configuration		1, 2	TBD		
Initial DL BWP configuration		1, 2	DLBWP.0.1		
Initial UL BWP configuration		1, 2	ULBWP.0.1		
RLM-RS		1, 2	SSB		
Qrxlevmin	dBm/SCS	1, 2	-137		
Pcompensation	dB	1, 2	0		
$Qhyst_s$	dB	1, 2	0		
$Qoffset_{s,n}$	dB	1, 2	0		

Cell_selection_and_reselection_quality_measurement		1, 2	SS-RSRP		
$\hat{E}_s / I_{ot}$	dB	1, 2	-4	-infinity	12
N_{oc} Note2	dBm/SCS	1, 2	-95		
N_{oc} Note2	dBm/15 kHz	1, 2	-98		
$\hat{E}_s / N_{oc}$	dB	1, 2	-4	-infinity	12
SS-RSRP Note3	dBm/SCS	1, 2	-99	-infinity	-83
Io	dBm/38.16 MHz	1, 2	-62.50	-63.95	-51.69
Treselection	s	1, 2	0	0	0
SnonintrasearchP	dB	1, 2	50		
$Thresh_{x, highP}$	dB	1, 2	48		
$Thresh_{serving, lowP}$	dB	1, 2	44		
$Thresh_{x, lowP}$	dB	1, 2	50		
Propagation Condition		1, 2	AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.12.1.1.1.1-4: Cell specific test parameters for E-UTRA cell 1

Parameter	Unit	Cell 1		
		T1	T2	T3
E-UTRA RF Channel number		1		
$BW_{channel}$	MHz	10		
OCNG Patterns defined in TS 36.133 [15] clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6		
PBCH_RA	dB	0		
PBCH_RB	dB			
PSS_RA	dB			
SSS_RA	dB			
PCFICH_RB	dB			
PHICH_RA	dB			
PHICH_RB	dB			
PDCCH_RA	dB			
PDCCH_RB	dB			
PDSCH_RA	dB			
PDSCH_RB	dB			
OCNG_RA Note 1	dB			
OCNG_RB Note 1	dB			
Qrxlevmin	dBm	-140		
N_{oc} Note 2	dBm/15 kHz	-98		
RSRP Note 3	dBm/15 KHz	-84	-84	-84

$\hat{E}_s/I_{ot}$	dB	14	14	14
$\hat{E}_s/N_{oc}$	dB	14	14	14
$Treselection_{EUTRAN}$	S	0		
SnonintrasearchP	dB	50		
$Thresh_{x, highP}$	dB	48		
$Thresh_{serving, lowP}$	dB	44		
$Thresh_{x, lowP}$	dB	50		
Propagation Condition		AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.12.1.1.1.2 Test Requirements

The cell reselection delay to a higher priority NR cell subject to CCA is defined as the time from the beginning of time period T3, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration updateon cell 2.

The cell re-selection delay to a higher priority cell shall be less than 60 + 1.28 x (5 + M_e) + T_{SI_CCA} s. M_e is the number of DRX cycles with at least one SMTC where there are no SSBs available during the $T_{evaluate,NR_Intra_CCA}$. If $M_e > M_{e,max}$ the UE is required to restart the evaluation of cell 2.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a higher priority cell can be expressed as: $T_{higher_priority_search}$ + $T_{evaluate,\ NR_inter_CCA}$ + $T_{SI_CCA,}$ and to a lower priority cell can be expressed as: $T_{evaluate,\ NR}$ + $T_{SI\text{-}NR,}$

Where:

$T_{higher_priority_search}$ See clause 4.2.2 in TS 36.133 [15]

$T_{evaluate,\ NR_\ inter_CCA}$ See Table 4.2.2.5.7-1 in clause 4.2.2.5.7

T_{SI_CCA} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell.

$T_{evaluate,\ NR}$ See Table 4.2.2.5.6-1 in clause 4.2.2.5.6 in TS 36.133 [15]

$T_{SI\text{-}NR}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 67.68 s, allow 68 s for the cell re-selection delay to a higher priority NR cell and 7.68 s for the cell re-selection delay to a lower priority cell in the test case, which we allow 8 s.

A.12.2 RRC_CONNECTED state mobility

A.12.2.1 Handover

A.12.2.1.1 E-UTRAN - NR with CCA handover

A.12.2.1.1.1 Test Purpose and Environment

This test shall verify the E-UTRAN to NR FR1 handover requirements specified in clause 5.3.4A in TS 36.133 [15].

The test comprises of one E-UTRA carrier and one NR carrier with CCA. There are two cells and one cell on each carrier. Cell 1 is the E-UTRAN cell and Cell 2 is an inter-RAT NR neighbour cell with CCA.

The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE does not have any timing information of Cell 2. Starting T2, Cell 2 becomes detectable and the UE is expected to detect and send a measurement report. Gap pattern configuration with id #0 as specified in Table 8.1.2.1-1 of TS 36.133 [15] is configured before T2 begins to enable inter-RAT frequency monitoring. A RRC message implying handover shall be sent to the UE during period T2 after the UE has reported Event B2. The start of T3 is the instant when the last TTI containing the RRC message implying handover is sent to the UE. The handover message shall contain Cell 2 as the target cell.

Supported test configurations are shown in table A.12.2.1.1-1. General test parameters are provided in Table A.12.2.1.1-2. Cell specific test parameters for Cell 1 and Cell 2 are provided in Tables A.12.2.1.1-3 and A.12.2.1.1-4 respectively.

Table A.12.2.1.1-1: Supported test configurations for E-UTRAN inter-RAT NR handover

Configuration	Description
1	LTE FDD, NR with CCA 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR with CCA 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Table A.12.2.1.1-2: General test parameters for E-UTRAN inter-RAT NR handover

Parameter		Unit	Value	Comment
NR RF Channel Number			1	1 NR carrier frequency with CCA is used in the test
LTE RF Channel Number			2	1 E-UTRAN carrier frequency is used in the test
Initial conditions	Active cell		Cell 1	E-UTRAN cell
	Neighbouring cell		Cell 2	NR cell with CCA
Final condition	Active cell		Cell 2	
DL CCA model			As specified in clause A.3.26.2.1	
UL CCA model			As specified in clause A.3.26.2.2	
NR measurement quantity			SS-RSRP	
E-UTRAN measurement quantity			RSRP	
b2-Threshold1		dBm	-84	Absolute E-UTRAN RSRP threshold for event B2
b2-Threshold2NR		dBm	As specified in Table A.12.2.1.1-4	Absolute NR SS-RSRP threshold for event B2
Hysteresis		dB	0	
TimeToTrigger		s	0	
Filter coefficient			0	L3 filtering is not used
DRX			OFF	Non-DRX test
Access Barring Information		-	Not sent	No additional delays in random access procedure

Time offset between cells		3 ms	Asynchronous cells
Gap pattern configuration Id		0	As specified in Table 8.1.2.1-1 started before T2 starts [15]
T1	s	[5]	
T2	s	[≤5]	
T3	s	[1]	

Table A.12.2.1.1-3: Cell specific test parameters for E-UTRAN inter-RAT NR handover with CCA (Cell 1)

Parameter	Unit	Configuration	Cell 1		
			T1	T2	T3
RF channel number		1, 2	2		
Duplex mode		1	FDD		
		2	TDD		
TDD special subframe configuration[Note1]		1, 2	6		
TDD uplink-downlink configuration[Note1]		1, 2	1		
$BW_{channel}$	MHz	1, 2	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100		
PRACH Configuration[Note2]		1	4		
		2	53		
PDSCH parameters: DL Reference Measurement Channel[Note3]		1	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD		
		2	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD		
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note3]		1	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD		
		2	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD		
OCNG Patterns[Note3]		1	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD		
		2	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD		
PBCH_RA	dB	1, 2	0		
PBCH_RB					
PSS_RA					
SSS_RA					
PCFICH_RB					
PHICH_RA					
PHICH_RB					
PDCCH_RA					
PDCCH_RB					
PDSCH_RA					
PDSCH_RB					
OCNG_RA[Note4]					
OCNG_RB[Note4]					
N_{oc}[Note5]	dBm/15kHz	1, 2	-98		
$\hat{E}_s/N_{oc}$	dB	1, 2	7	7	7
$\hat{E}_s/I_{ot}$[Note6]	dB	1, 2	7	7	7

RSRP[Note6]	dBm/15kHz	1, 2	-91	-91	-91
SCH_RP[Note6]	dBm/15kHz	1, 2	-91	-91	-91
Io[Note6]	dBm/9MHz	1, 2	-62.43	-62.43	-62.43
Propagation Condition		1, 2	AWGN		
Antenna Configuration and Correlation Matrix [Note7]		1, 2	1x2 Low		

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [23].
Note 3: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 4: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 6: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 7: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].

Table A.12.2.1.1-4: Cell specific test parameters E-UTRAN inter-RAT NR with CCA handover (Cell 2)

Parameter		Unit	Configuration	Cell 2		
				T1	T2	T3
RF channel number			1, 2	1		
DL CCA probability P_{CCA_DL}	Semi-static channel access [Note 4, 6]		1, 2	P_{CCA_DL}=0.9375		
	Dynamic channel access [Note 5, 6]		1, 2	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		
UL CCA probability P_{CCA_UL}	Semi-static channel access [Note 4, 6]		1, 2	P_{CCA_UL}=0.87		
	Dynamic channel access [Note 5, 6]		1, 2	P_{CCA_UL}=0.75		
L_{CCA_DL}		-	1, 2	5		
W_{CCA_DL}		ms	1, 2	T304		
L_{CCA_UL}		-	1, 2	5		
W_{CCA_UL}		ms	1, 2	T304		
T304		ms	1, 2	500		
Duplex mode			1, 2	TDD		
TDD Configuration			1, 2	TDDConf.1.1 CCA		
$BW_{channel}$		MHz	1, 2	40: $N_{RB,c}$ = 106 (TDD)		
PDSCH reference measurement channel			1, 2	SR.1.1 CCA		
CORESET reference channel			1, 2	CR.1.1 CCA		
PRACH configuration			1, 2	FR1 PRACH configuration 1 under CCA		
OCNG pattern[Note1]			1, 2	OP.1		
BWP	Initial DL BWP		1, 2	DLBWP.0.1		
	Dedicated DL BWP			DLBWP.1.1		
	Initial UL BWP			ULBWP.0.1		
	Dedicated UL BWP			ULBWP.1.1		
SMTC configuration			1, 2	SMTC.1		
SSB configuration	Semi-static channel access [Note 4, 6]		1, 2	SSB.1 CCA		

	Dynamic channel access Note 5, 6		1, 2	SSB.2 CCA		
DBT window configuration				As defined in A.3.28.1		
b2-Threshold2NR		dBm	1	-105		
			2	-103		
EPRE ratio of PSS to SSS		dB	1, 2	0		
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						
EPRE ratio of PDCCH to PDCCH_DMRS						
EPRE ratio of PDSCH_DMRS to SSS						
EPRE ratio of PDSCH to PDSCH_DMRS						
EPRE ratio of OCNG DMRS to SSS						
EPRE ratio of OCNG to OCNG DMRS						
N_{oc} Note2		dBm/15 KHz	1, 2	-98		
N_{oc} Note2		dBm/SCS	1, 2	-95		
$\hat{E}_s/N_{oc}$		dB	1, 2	-inifinit	0	0
$\hat{E}_s/I_{ot}$ Note3		dB	1, 2	-inifinit	0	0
SS-RSRP Note3		dBm/SCS	1, 2	-inifinit	-95	-95
Io Note3		dBm/38.16 MHz	1, 2	-63.96	-60.94	-60.94
Propagation condition			1, 2	AWGN		
Antenna Configuration and Correlation Matrix			1, 2	1x2 Low		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 5: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 6: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

A.12.2.1.1.2 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 112 + (L_1´ + L_3)*20 ms from the beginning of time period T3.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 50 ms and is specified in TS36.331.

$T_{interrupt}$ = 62 + (L_1´ + L_3) * T_{SMTC}; $T_{interrupt}$ is defined in TS36.133 clause 5.3.4A.3 where

- L_1´ is the number of SMTC occasions not available at the UE during the inter-RAT detection period.

- L_3 is the number of consecutive SSB to PRACH occasion association periods during which no PRACH occasion is available for PRACH transmission due to UL CCA failure. $L_3 = 0$ for Type 2C UL channel access procedure as defined in TS 37.213 [33].

  T_{SMTC} = 20 ms is the SMTC periodicity ms in the test.

This gives a total of 112 +(L_1´ + L_3)*20 ms.

A.12.3 Signalling characteristics

A.12.3.1 Interruptions

A.12.4 Measurement procedure

A.12.4.1 E-UTRAN–NR inter-RAT SFTD measurements

A.12.4.1.1 E-UTRA – NR Inter-RAT SFTD Measurement Delay with NR under CCA in non-DRX

A.12.4.1.1.1 Test Purpose and Environment

The purpose of this test is to partly verify that measurement reporting delay for SFTD between E-UTRA PCell and inter-RAT NR neighbour cell under CCA is within the requirements stated in clauses 8.1.2.4.25 and 8.1.2.4.26 of TS 36.133 [15] for E-UTRA FDD and TDD, respectively, when no measurement gaps are provided and no DRX is configured.

The tests consist of a single time period of duration T1. Two carriers are used in the tests: one E-UTRA carrier with the PCell (Cell 1), and one NR carrier under CCA with the NR neighbour cell (Cell 2).

Prior to the start of time duration T1, the UE is connected to Cell 1 and configured to carry out intra-frequency measurements only. The point in time at which the UE receives, at the UE antenna connector(s), a RRC message containing a measurement configuration for SFTD measurements on RF channel 2 defines the start of time duration T1. Following the start of T1 the UE shall detect Cell 2, determine the SFN and frame time difference of Cell 2 relative to Cell 1, and send a measurement report.

The supported test configurations are listed in Table A.12.4.1.1.1-1 below. General test parameters and cell-specific parameters for the NR cell are provided in Tables A.12.4.1.1.1-2 and A.12.4.1.1.1-3 below, respectively. Cell-specific parameters for the E-UTRA cell are provided in clause A.3.7.2.1.

Table A.12.4.1.1.1-1: Applicable test configurations for inter-RAT SFTD measurement delay test with NR under CCA

Config	Description
1	LTE FDD; NR: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	LTE TDD; NR: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.12.4.1.1.1-2: General test parameters for inter-RAT SFTD measurement delay test with NR under CCA

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		Config 1,2	1		One E-UTRAN carrier frequencies is used.

NR RF Channel Number		Config 1,2	1		One NR carrier frequencies is used.
Active cell		Config 1,2	Cell 1		Cell 1 is on E-UTRA RF channel number 1.
Neighbour cell		Config 1,2	Cell 2		Cell 2 is on NR RF channel number 1.
CP length		Config 1,2	Normal		Applicable to both cells.
DRX		Config 1,2	OFF		DRX is not used
Frame time offset between serving and neighbour cells	ms	Config 1	3	7	Asynchronous cells. The timing of Cell 2 relative to the timing of Cell 1.
	µs	Config 2	3		Synchronous cells.
SFN offset between serving and neighbour cells		Config 1,2	0	1	SFN of Cell 2 relative to SFN of Cell 1.
SS-RSRP reporting		Config 1,2	No		Only SFTD is reported.
T1	s	Config 1,2	2		T1 shall exceed $T_{measure_SFTD_LBT_max}$ = 56 × SMTC

Table A.12.4.1.1.1-3: Cell specific test parameters for Cell 2 in inter-RAT SFTD measurement delay test with NR under CCA

Parameter		Unit	Cell 2
NR RF Channel Number			1
Duplex mode			TDD
$BW_{channel}$		MHz	40: $N_{RB,c}$ = 106
TDD configuration			TDDConf.1.1 CCA
DL CCA model			As specified in clause A.3.20.2.1
DL CCA probability for semi-static channel access[Note5,7]	P_{CCA_DL}		0.9375
DL CCA probability for dynamic channel access[Note6,7]	$P_{CCA_DL_1}$		0.75
	$P_{CCA_DL_2}$		0.75
OCNG Pattern defined in A.3.2.1.1[Note 1]			OP.1
SMTC configuration defined in A.3.2.11.1 and A.3.2.11.2			SMTC.2
SSB configuration for semi-static channel access[Note5,7]			SSB.1 CCA
SSB configuration for dynamic channel access[Note6,7]			SSB.2 CCA
DBT window configuration			DBT.1
PDSCH/PDCCH subcarrier spacing		kHz	30
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS		dB	
EPRE ratio of PBCH to PBCH DMRS		dB	
EPRE ratio of OCNG DMRS to SSS [Note 1]		dB	
EPRE ratio of OCNG to OCNG DMRS [Note 1]		dB	

N_{oc} Note2	dBm/15 kHz	-98
N_{oc} Note2	dBm/SCS	-95
SS-RSRP Note 3, 4	dBm/SCS	-91
$\hat{E}_s/I_{ot}$	dB	4
$\hat{E}_s/N_{oc}$	dB	4
Io Note 3	dBm/38.16 MHz	-58.50
Propagation Condition		AWGN

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols in slots with downlink transmission bursts.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 7: For UE supporting both semi-static and dynamic cannel access, the UE can be tested under dynamic channel access only..

A.12.4.1.1.2 Test Requirements

Following the start of T1, the UE shall detect Cell 2 and determine the relative time difference between Cell 1 and Cell 2. At latest at $T_{RRC_procedure_delay} + T_{measure_SFTD_LBT_max}$ after the beginning of time duration T1, the UE shall send a measurement report on SFTD between Cell 1 and Cell 2.

The observed rate of successful SFTD reports in repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2\times TTI_{DCCH}$ longer than the measurement reporting delays above due to TTI insertion uncertainty of the measurement report in DCCH.

A.12.4.2 E-UTRAN–NR inter-RAT measurements on NR carrier frequency under CCA

A.12.4.2.1 E-UTRA-NR inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is not used

A.12.4.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.1.2.4.21A of TS 36.133 [15] for E-UTRAN FDD-NR measurements under CCA and clause 8.1.2.4.22A of TS 36.133 [15] for E-UTRAN TDD-NR measurements under CCA.

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 1 on a carrier frequency with CCA. The test parameters are given in Tables A.12.4.2.1.1-1, A.12.4.2.1.1-2, A.12.4.2.1.1-3 and A.12.4.2.1.1-4. Cell transmits SSBs in DBT windows according to DL CCA model.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.12.4.2.1.1-2 is provided for UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #4 as defined in Table A.12.4.2.1.1-2 is provided for UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) [16] is used. The UE is tested when MeasTriggerQuantity is configured as RSRP, RSRQ and SINR for each test. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.12.4.2.1.1-1: NR inter-RAT event triggered reporting tests without SSB index reading for FR1

Configuration	Description
1	LTE FDD; NR with CCA: SCS 30 kHz, BW 40 MHz, TDD
2	LTE TDD; NR with CCA: SCS 30 kHz, BW 40 MHz, TDD
NOTE: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.12.4.2.1.1-2: General test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		1, 2	1		One E-UTRAcarrier frequency is used.
NR RF Chanel Number		1, 2	1		One FR1 NR carrier frequency under CCA is used.
DL CCA model			As specified in clause A.3.26.2.1		
UL CCA model			As specified in clause A.3.26.2.2		
Active cell		1, 2	E-UTRA cell 1 (PCell)		E-UTRA cell 1 is on E-UTRA RF channel number 1.
Neighbour cell		1, 2	NR cell 2		NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2	0	4	As specified in clause Table 8.1.2.1-1 of TS 36.133 [15].
Measurement gap offset		1, 2	39	19	As specified in TS 36.331 [16].
b2-Threshold1	dBm	1, 2	Note 1		E-UTRA RSRP/RSRQ/SINR threshold for E-UTRA RSRP measurement on cell 1 for event B2 [16]
b2-Threshold2NR	dBm	1, 2	Note 2		SS-RSRP/ SS-RSRQ/ SS-SINR threshold measurement on cell 2 for event B2 [16]
Hysteresis	dB	1, 2	0		
CP length		1, 2	Normal		
TimeToTrigger	s	1, 2	0		
Filter coefficient		1, 2	0		L3 filtering is not used
DRX		1, 2	OFF		DRX is not used
Time offset between serving and neighbour cells		1, 2	3μs		Synchronous cells.
T1	s	1, 2	5		

T2	s	1, 2	$\geq T_{identify_irat_cca_without_index}$	$\geq T_{identify_irat_cca_without_index}$	$T_{identify_irat_cca_without_index}$ is defined in clause 8.1.2.4.21A.1 and 8.1.2.4.22A.1 in TS 36.133
Note 1: The value of b2-Threshold1 is defined in Table A.12.4.2.1.1-3 Note 2: The value of b2-Threshold2NR is defined in Table A.12.4.2.1.1-4					

Table A.12.4.2.1.1-3: E-UTRAN PCell specific test parameters for NR inter-RAT event triggered reporting in non-DRX with NR neigbour cell in FR1 without SSB time index detection

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2	1	
Duplex mode		1	FDD	
		2	TDD	
TDD special subframe configuration[Note1]		2	6	
TDD uplink-downlink configuration[Note1]		2	1	
$BW_{channel}$	MHz	1, 2	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note2]		1	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		2	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		1	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		2	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]		1	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		2	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
b2-Threshold1	dBm	1, 2	-77 for RSRP	
	dB	1, 2	77 for RSRQ	
	dB	1, 2	90 for SINR	
PBCH_RA	dB	1, 2	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note3]				
OCNG_RB[Note3]				
N_{oc}[Note4]	dBm/15kHz	1, 2	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2	17	17
$\hat{E}_s/I_{ot}$[Note5]	dB	1, 2	17	17

RSRP Note5	dBm/15kHz	1, 2	-87	-87
SCH_RP Note5	dBm/15kHz	1, 2	-87	-87
Io Note5	dBm/9MHz	1, 2	-59.13+10log ($N_{RB,c}$ /50)	-59.13+10log ($N_{RB,c}$ /50)
Propagation Condition Note6		1, 2	ETU70	
Antenna Configuration and Correlation Matrix Note6		1, 2	1x2 Low	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].

Table A.12.4.2.1.1-4: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
NR RF Channel Number		1, 2	2	
TDD configuration		1, 2	TDDConf.1.1 CCA	
$BW_{channel}$	MHz	1, 2	40: $N_{RB,c}$ = 106	
P_{CCA_DL}		1, 2	[TBD]	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		1, 2	OP.1	
SMTC configuration defined in A.3.11.1 and A.3.11.2		1, 2	SMTC.1	
DBT window configuration		1, 2	DBT.1	
SSB configuration for semi-static channel access		1, 2	SSB.1 CCA	
SSB configuration for dynamic channel access		1, 2	SSB.2 CCA	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	30	
b2-Threshold2NR	dBm	1, 2	-98 for SS-RSRP	
	dB	1, 2	55 for SS-RSRQ	
	dB	1, 2	50 for SS-RSRQ	
EPRE ratio of PSS to SSS		1, 2	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	dBm/15kHz	1, 2	-98	
N_{oc} Note2	dBm/SCS	1, 2	-95	
SS-RSRP Note 3,5	dBm/SCS	1, 2	-Infinity	-88
$\hat{E}_s/I_{ot}$ Note 5	dB	1, 2	-Infinity	7
$\hat{E}_s/N_{oc}$ Note 5	dB	1, 2	-Infinity	7
Io Note3	dBm/38.16MHz	1, 2	-63.95	-56.16

Propagation Condition		1, 2	ETU70
Antenna Configuration and Correlation Matrix		1, 2,	1x2 Low

NOTE 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for to be fulfilled.
NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
NOTE 5: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.

A.12.4.2.1.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than $T_{identify_irat_cca_without_index}$ ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-FR gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than $T_{identify_irat_cca_without_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and test 2, the UE is not required to report SSB time index. $T_{identify_irat_cca_without_index}$ is defined in defined in clause 8.1.2.4.21A.1 and 8.1.2.4.22A.1 in TS 36.133.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.12.4.2.2 E-UTRA-NR inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is used

A.12.4.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.1.2.4.21 of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.1.2.4.22 of TS 36.133 [15] for E-UTRAN TDD-NR measurements.

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 1 on a carrier frequency with CCA. The test parameters are given in Tables A.12.4.2.2.1-1, A.12.4.2.2.1-2, A.12.4.2.2.1-3 and A.12.4.2.2.1-4. Cell transmits SSBs in DBT windows according to DL CCA model.

In tests 1 and 2, measurement gap pattern configuration # 0 as defined in Table A.12.4.2.2.1-2 is provided for UE that does not support per-FR gap and in tests 3 and 4, measurement gap pattern configuration #4 as defined in Table A.12.4.2.2.1-2 is provided for UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) [16] is used. The UE is tested when MeasTriggerQuantity is configured as RSRP, RSRQ and SINR for each test. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.12.4.2.2.1-1: NR inter-RAT event triggered reporting tests without SSB index reading for FR1

Configuration	Description
1	LTE FDD; NR with CCA: SCS 30 kHz, BW 40 MHz, TDD
2	LTE TDD; NR with CCA: SCS 30 kHz, BW 40 MHz, TDD
NOTE: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.12.4.2.2.1-2: General test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
E-UTRA RF Channel Number		1, 2	1				One E-UTRAcarrier frequency is used.
NR RF Chanel Number		1, 2	1				One FR1 NR carrier frequency under CCA is used.
Active cell		1, 2	E-UTRA cell 1 (PCell)				E-UTRA cell 1 is on E-UTRA RF channel number 1.
DL CCA model			As specified in clause A.3.26.2.1				
UL CCA model			As specified in clause A.3.26.2.2				
Neighbour cell		1, 2	NR cell 2				NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2	0		4		As specified in clause Table 8.1.2.1-1 of TS 36.133 [15].
Measurement gap offset		1, 2	39		19		As specified in TS 36.331 [16].
b2-Threshold1	dBm	1, 2	Note 1				E-UTRA RSRP/RSRQ/SINR threshold for E-UTRA RSRP measurement on cell 1 for event B2 [16]
b2-Threshold2NR	dBm	1, 2	Note 2				SS-RSRP/ SS-RSRQ/ SS-SINR threshold measurement on cell 2 for event B2 [16]
Hysteresis	dB	1, 2	0				
CP length		1, 2	Normal				
TimeToTrigger	s	1, 2	0				
Filter coefficient		1, 2	0				L3 filtering is not used
DRX		1, 2	DRX. 9	DRX. 12	DRX. 9	DRX. 12	As specified in clause A.3.3
Time offset between serving and neighbour cells		1, 2	3µs				Synchronous cells.
T1	s	1, 2	5				
T2	s	1, 2	$\geq T_{identify_irat_cca_without_index}$				$T_{identify_irat_cca_without_index}$ is defined in clause 8.1.2.4.21A.1 and 8.1.2.4.22A.1 in TS 36.133
Note 1: The value of b2-Threshold1 is defined in Table A.12.4.2.1.1-3 Note 2: The value of b2-Threshold2NR is defined in Table A.12.4.2.1.1-4							

Table A.12.4.2.2.1-3: E-UTRAN PCell specific test parameters for NR inter-RAT event triggered reporting in non-DRX with NR neigbour cell in FR1 without SSB time index detection

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2	1	
Duplex mode		1	FDD	
		2	TDD	
TDD special subframe configuration[Note1]		2	6	
TDD uplink-downlink configuration[Note1]		2	1	
$BW_{channel}$	MHz	1, 2	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note2]		1	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		2	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		1	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		2	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]		1	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		2	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
b2-Threshold1	dBm	1, 2	-77 for RSRP	
	dB	1, 2	77 for RSRQ	
	dB	1, 2	90 for SINR	
PBCH_RA	dB	1, 2	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note3]				
OCNG_RB[Note3]				
N_{oc}[Note4]	dBm/15kHz	1, 2	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2	17	17
$\hat{E}_s/I_{ot}$[Note5]	dB	1, 2	17	17
RSRP[Note5]	dBm/15kHz	1, 2	-87	-87
SCH_RP[Note5]	dBm/15kHz	1, 2	-87	-87
Io[Note5]	dBm/9MHz	1, 2	-59.13+10log ($N_{RB,c}$ /50)	-59.13+10log ($N_{RB,c}$ /50)
Propagation Condition [Note6]		1, 2	ETU70	
Antenna Configuration and Correlation Matrix [Note6]		1, 2	1x2 Low	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].

Table A.12.4.2.2.1-4: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
NR RF Channel Number		1, 2	1	
TDD configuration		1, 2	TDDConf.1.1 CCA	
$BW_{channel}$	MHz	1, 2	40: $N_{RB,c}$ = 106	
P_{CCA_DL}			[TBD]	
CCA model		1, 2	TBD	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		1, 2	OP.1	
SMTC configuration defined in A.3.11.1 and A.3.11.2		1, 2	SMTC.1	
DBT window configuration		1, 2	DBT.1	
SSB configuration for semi-static channel access		1, 2	SSB.1 CCA	
SSB configuration for dynamic channel access		1, 2	SSB.2 CCA	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	30	
b2-Threshold2NR	dBm	1, 2	-98 for SS-RSRP	
	dB	1, 2	55 for SS-RSRQ	
	dB	1, 2	50 for SS-SINR	
EPRE ratio of PSS to SSS		1, 2	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	dBm/15kHz	1, 2	-98	
N_{oc} Note2	dBm/SCS	1, 2	-95	
SS-RSRP Note 3,5	dBm/SCS	1, 2	-Infinity	-88
$\hat{E}_s/I_{ot}$ Note 5	dB	1, 2	-Infinity	7
$\hat{E}_s/N_{oc}$ Note 5	dB	1, 2	-Infinity	7
Io Note3	dBm/38.16MHz	1, 2	-63.95	-56.16
Propagation Condition		1, 2	ETU70	
Antenna Configuration and Correlation Matrix		1, 2,	1x2 Low	

NOTE 1:	OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for to be fulfilled.
NOTE 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
NOTE 5:	The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.

A.12.4.2.2.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than $T_{identify_irat_cca_without_index}$ ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than $T_{identify_irat_cca_without_index}$ ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 3 with per-FR gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than $T_{identify_irat_cca_without_index}$ ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 4 with per-FR gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than $T_{identify_irat_cca_without_index}$ ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In tests 1, 2, 3 and 4, the UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.12.4.2.3 NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is not used

A.12.4.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.1.2.4.21of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.1.2.4.22 of TS 36.133 [15] for E-UTRAN TDD-NR measurements.

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 1 on a carrier frequency with CCA. The test parameters are given in Tables A.12.4.2.3.1-1, A.12.4.2.3.1-2, A.12.4.2.3.1-3 and A.12.4.2.3.1-4. Cell transmits SSBs in DBT windows according to DL CCA model.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.12.4.2.3.1-2 is provided for UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #4 as defined in Table A.12.4.2.3.1-2 is provided for UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) [16] is used. The UE is tested when MeasTriggerQuantity is configured as RSRP, RSRQ and SINR for each test. In the measurement configuration the UE shall be indicated to report the SSB index of the identified NR cell. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.12.4.2.3.1-1: NR inter-RAT event triggered reporting tests with SSB index reading for FR1

Configuration	Description
1	LTE FDD; NR with CCA: SCS 30 kHz, BW 40 MHz, TDD
2	LTE TDD; NR with CCA: SCS 30 kHz, BW 40 MHz, TDD
NOTE: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.12.4.2.3.1-2: General test parameters for NR inter-RAT event triggered reporting for FR1 with SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		1, 2	1		One E-UTRAcarrier frequency is used.
NR RF Chanel Number		1, 2	1		One FR1 NR carrier frequency under CCA is used.
DL CCA model			As specified in clause A.3.26.2.1		
UL CCA model			As specified in clause A.3.26.2.2		
Active cell		1, 2	E-UTRA cell 1 (PCell)		E-UTRA cell 1 is on E-UTRA RF channel number 1.
Neighbour cell		1, 2	NR cell 2		NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2	0	4	As specified in clause Table 8.1.2.1-1 of TS 36.133 [15].
Measurement gap offset		1, 2	39	19	As specified in TS 36.331 [16].
b2-Threshold1	dBm	1, 2	Note 1		E-UTRA RSRP/RSRQ/SINR threshold for E-UTRA RSRP measurement on cell 1 for event B2 [16]
b2-Threshold2NR	dBm	1, 2	Note 2		SS-RSRP/ SS-RSRQ/ SS-SINR threshold measurement on cell 2 for event B2 [16]
Hysteresis	dB	1, 2	0		
CP length		1, 2	Normal		
TimeToTrigger	s	1, 2	0		
Filter coefficient		1, 2	0		L3 filtering is not used
DRX		1, 2	OFF		DRX is not used
Time offset between serving and neighbour cells		1, 2	3µs		Synchronous cells.
T1	s	1, 2	5		
T2	s	1, 2	≥ $T_{identify_irat_cca_with_index}$	≥ $T_{identify_irat_cca_with_index}$	$T_{identify_irat_cca_with_index}$ is defined in clause 8.1.2.4.21A.1 and 8.1.2.4.22A.1 in TS 36.133
Note 1: The value of b2-Threshold1 is defined in Table A.12.4.2.3.1-3 Note 2: The value of b2-Threshold2NR is defined in Table A.12.4.2.3.1-4					

Table A.12.4.2.3.1-3: E-UTRAN PCell specific test parameters for NR inter-RAT event triggered reporting in non-DRX with NR neigbour cell in FR1 with SSB time index detection

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2	1	
Duplex mode		1	FDD	
		2	TDD	
TDD special subframe configuration[Note1]		2	6	
TDD uplink-downlink configuration[Note1]		2	1	
$BW_{channel}$	MHz	1, 2	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note2]		1	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		2	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		1	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		2	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]		1	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		2	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
b2-Threshold1	dBm	1, 2	-77 for RSRP	
	dB	1, 2	77 for RSRQ	
	dB	1, 2	90 for SINR	
PBCH_RA	dB	1, 2	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note3]				
OCNG_RB[Note3]				
N_{oc}[Note4]	dBm/15kHz	1, 2	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2	17	17
$\hat{E}_s/I_{ot}$[Note5]	dB	1, 2	17	17
RSRP[Note5]	dBm/15kHz	1, 2	-87	-87
SCH_RP[Note5]	dBm/15kHz	1, 2	-87	-87
Io[Note5]	dBm/9MHz	1, 2	-59.13+10log ($N_{RB,c}$ /50)	-59.13+10log ($N_{RB,c}$ /50)
Propagation Condition [Note6]		1, 2	ETU70	
Antenna Configuration and Correlation Matrix [Note6]		1, 2	1x2 Low	

Note 1:	Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2:	DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 3:	OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5:	$\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 6:	Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].

Table A.12.4.2.3.1-4: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR1 with SSB time index detection

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
NR RF Channel Number		1, 2	1	
TDD configuration		1, 2	TDDConf.1.1 CCA	
$BW_{channel}$	MHz	1, 2	40: $N_{RB,c}$ = 106	
P_{CCA_DL}			[TBD]	
CCA model		1, 2	TBD	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		1, 2	OP.1	
SMTC configuration defined in A.3.11.1 and A.3.11.2		1, 2	SMTC.1	
DBT window configuration		1, 2	DBT.1	
SSB configuration for semi-static channel access		1, 2	SSB.1 CCA	
SSB configuration for dynamic channel access		1, 2	SSB.2 CCA	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	30	
b2-Threshold2NR	dBm	1, 2	-98 for SS-RSRP	
	dB	1, 2	55 for SS-RSRQ	
	dB	1, 2	50 for SS-SINR	
EPRE ratio of PSS to SSS		1, 2	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	dBm/15kHz	1, 2	-98	
N_{oc} Note2	dBm/SCS	1, 2	-95	
SS-RSRP Note 3,5	dBm/SCS	1, 2	-Infinity	-88
$\hat{E}_s/I_{ot}$ Note 5	dB	1, 2	-Infinity	7
$\hat{E}_s/N_{oc}$ Note 5	dB	1, 2	-Infinity	7
Io Note3	dBm/38.16MHz	1, 2	-63.95	-56.16
Propagation Condition		1, 2	ETU70	
Antenna Configuration and Correlation Matrix		1, 2,	1x2 Low	

NOTE 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for to be fulfilled.
NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
NOTE 5: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.

A.12.4.2.3.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than $T_{identify_irat_cca_with_index}$ ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-FR gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than $T_{identify_irat_cca_with_index}$ ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and test 2, the UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.12.4.2.4 NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is used

A.12.4.2.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.1.2.4.21of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.1.2.4.22 of TS 36.133 [15] for E-UTRAN TDD-NR measurements.

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 1 on a carrier frequency with CCA. The test parameters are given in Tables A.12.4.2.4.1-1, A.12.4.2.4.1-2, A.12.4.2.4.1-3 and A.12.4.2.4.1-4. Cell transmits SSBs in DBT windows according to DL CCA model.

In tests 1 and 2, measurement gap pattern configuration # 0 as defined in Table A.12.4.2.4.1-2 is provided for UE that does not support per-FR gap and in tests 3 and 4, measurement gap pattern configuration #4 as defined in Table A.12.4.2.4.1-2 is provided for UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) [16] is used. In the measurement configuration the UE shall be indicated to report the SSB index of the identified NR cell. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.12.4.2.4.1-1: NR inter-RAT event triggered reporting tests with SSB index reading for FR1

Configuration	Description
1	LTE FDD; NR with CCA: SCS 30 kHz, BW 40 MHz, TDD

2	LTE TDD; NR with CCA: SCS 30 kHz, BW 40 MHz, TDD
NOTE: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.12.4.2.4.1-2: General test parameters for NR inter-RAT event triggered reporting for FR1 with SSB time index detection

Parameter	Unit	Test configuration	Value				Comment
			Test 1	Test 2	Test 3	Test	
E-UTRA RF Channel Number		1, 2	1				One E-UTRAcarrier frequency is used.
NR RF Chanel Number		1, 2	1				One FR1 NR carrier frequency under CCA is used.
DL CCA model			As specified in clause A.3.26.2.1				
UL CCA model			As specified in clause A.3.26.2.2				
Active cell		1, 2	E-UTRA cell 1 (PCell)				E-UTRA cell 1 is on E-UTRA RF channel number 1.
Neighbour cell		1, 2	NR cell 2				NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2	0		4		As specified in clause Table 8.1.2.1-1 of TS 36.133 [15].
Measurement gap offset		1, 2	39		19		As specified in TS 36.331 [16].
b2-Threshold1	dBm	1, 2	Note 1				E-UTRA RSRP/RSRQ/SINR threshold for E-UTRA RSRP measurement on cell 1 for event B2 [16]
b2-Threshold2NR	dBm	1, 2	Note 2				SS-RSRP/ SS-RSRQ/ SS-SINR threshold measurement on cell 2 for event B2 [16]
Hysteresis	dB	1, 2	0				
CP length		1, 2	Normal				
TimeToTrigger	s	1, 2	0				
Filter coefficient		1, 2	0				L3 filtering is not used
DRX		1, 2	DRX.9	DRX.12	DRX.9	DRX.12	As specified in clause A.3.3
Time offset between serving and neighbour cells		1, 2	3μs				Synchronous cells.
T1	s	1, 2	5				
T2	s	1, 2	≥$T_{identify_irat_cca_with_index}$				$T_{identify_irat_cca_with_index}$ is defined in clause 8.1.2.4.21A.1 and 8.1.2.4.22A.1 in TS 36.133
Note 1: The value of b2-Threshold1 is defined in Table A.12.4.2.4.1-3 Note 2: The value of b2-Threshold2NR is defined in Table A.12.4.2.4.1-4							

Table A.12.4.2.4.1-3: E-UTRAN PCell specific test parameters for NR inter-RAT event triggered reporting in non-DRX with NR neigbour cell in FR1 with SSB time index detection

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2	1	
Duplex mode		1	FDD	
		2	TDD	

TDD special subframe configuration[Note1]		2	6	
TDD uplink-downlink configuration[Note1]		2	1	
$BW_{channel}$	MHz	1, 2	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note2]		1	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		2	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		1	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		2	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]		1	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		2	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
b2-Threshold1	dBm	1, 2	-77 for RSRP	
	dB	1, 2	77 for RSRQ	
	dB	1, 2	90 for SINR	
PBCH_RA	dB	1, 2	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note3]				
OCNG_RB[Note3]				
N_{oc}[Note4]	dBm/15kHz	1, 2	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2	17	17
$\hat{E}_s/I_{ot}$[Note5]	dB	1, 2	17	17
RSRP[Note5]	dBm/15kHz	1, 2	-87	-87
SCH_RP[Note5]	dBm/15kHz	1, 2	-87	-87
Io[Note5]	dBm/9MHz	1, 2	-59.13+10log ($N_{RB,c}$ /50)	-59.13+10log ($N_{RB,c}$ /50)
Propagation Condition [Note6]		1, 2	ETU70	
Antenna Configuration and Correlation Matrix [Note6]		1, 2	1x2 Low	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].

Table A.12.4.2.4.1-4: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR1 with SSB time index detection

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
NR RF Channel Number		1, 2	1	
TDD configuration		1, 2	TDDConf.1.1 CCA	
$BW_{channel}$	MHz	1, 2	40: $N_{RB,c}$ = 106	
P_{CCA_DL}			TBD	
CCA model		1, 2	TBD	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		1, 2	OP.1	
SMTC configuration defined in A.3.11.1 and A.3.11.2		1, 2	TBD	
DBT window configuration		1, 2	TBD	
SSB configuration for semi-static channel access		1, 2	SSB.1 CCA	
SSB configuration for dynamic channel access		1, 2	SSB.2 CCA	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	30	
b2-Threshold2NR	dBm/SCS	1, 2	-98 for SS-RSRP	
	dB	1, 2	55 for SS-RSRQ	
		1, 2	50 for SS-SINR	
EPRE ratio of PSS to SSS		1, 2	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	dBm/15kHz	1, 2	-98	
N_{oc} Note2	dBm/SCS	1, 2	-95	
SS-RSRP Note 3,5	dBm/SCS	1, 2	-Infinity	-88
$\hat{E}_s/I_{ot}$ Note 5	dB	1, 2	-Infinity	7
$\hat{E}_s/N_{oc}$ Note 5	dB	1, 2	-Infinity	7
Io Note3	dBm/38.16MHz	1, 2	-63.95	-56.16
Propagation Condition		1, 2	ETU70	
Antenna Configuration and Correlation Matrix		1, 2,	1x2 Low	

NOTE 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for to be fulfilled.
NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
NOTE 5: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.

A.12.4.2.4.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than $T_{identify_irat_cca_with_index}$ ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than $T_{identify_irat_cca_with_index}$ ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 3 with per-FR gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than $T_{identify_irat_cca_with_index}$ ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 4 with per-FR gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than $T_{identify_irat_cca_with_index}$ ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In tests 1, 2, 3 and 4, the UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.12.4.2.5 RSSI measurement reporting

A.12.4.2.5.1 Test purpose and environment

The purpose of this test is to verify that the UE correctly reports RSSI measurements. This test will partly verify the inter-RAT RSSI measurement reporting requirements in TS 36.133 [15, Section 8.1.2.4.21A.1.5].

A.12.4.2.5.2 Test parameters

In the test, the UE is configured to perform inter-RAT RSSI measurements on a carrier frequency under CCA.

Supported test configurations are shown in Table A.12.4.2.5.2-1. There is one cell in the test: Cell 1 is E-UTRAN PCell on a licensed band. Prior to the start of the time duration T1, the UE is connected to Cell 1. The RSSI measurement is performed on an inter-RAT carrier frequency under CCA. The E-UTRAN PCell setting refers to Table A.3.7.2.1-1.

Table A.12.4.2.5.2-1: Supported test configurations.

Configuration	Description
1	LTE FDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
2	LTE TDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
NOTE: The UE is only required to pass in one of the supported test configurations above.	

Table A.12.4.2.5.2-2: General test parameters.

Editor's note: Table TBD

A.12.4.2.6 Channel occupancy measurement reporting

A.12.4.2.6.1 Test purpose and environment

The purpose of this test is to verify that the UE correctly reports channel occupancy measurements. This test will partly verify the inter-RAT channel occupancy measurement reporting requirements in TS 36.133 [15, Section 8.1.2.4.21A.1.6].

A.12.4.2.6.2 Test parameters

In the test, the UE is configured to perform inter-frequency channel occupancy measurements on a carrier frequency under CCA.

Supported test configurations are shown in Table A.12.4.2.6.2-1. There is one cell in the test: Cell 1 which is E-UTRAN PCell on a licensed band. Prior to the start of the time duration T1, the UE is connected to Cell 1. The channel occupancy measurement is performed on an inter-RAT carrier frequency under CCA. The E-UTRAN PCell setting refers to Table A.3.7.2.1-1.

Table A.12.4.2.6.2-1: Supported test configurations.

Configuration	Description
1	LTE FDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
2	LTE TDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
NOTE: The UE is only required to pass in one of the supported test configurations above.	

Table A.12.4.2.6.2-2: General test parameters.

Editor's note: Table is TBD

A.12.5 Measurement performance

A.12.5.1 E-UTRAN–NR SFTD

A.12.5.1.1 Inter-RAT SFTD accuracy with NR target cell under CCA

A.12.5.1.1.1 Test Purpose

The purpose of this set of tests is to verify that the SFTD measurement accuracy is within the specified limits. This test will verify the requirements as specified in clause 9.1.27 in TS 36.133 [15] for inter-RAT SFTD measurements between E-UTRA PCell and NR target cell under CCA.

A.12.5.1.1.2 Test Environment

Supported test configurations are shown in Table A.12.5.1.1.2-1. In this set of test cases there are two cells on different carriers. Cell 1 is E-UTRAN PCell and Cell 2 is inter-RAT NR target cell under CCA. The test parameters of Cell 1 are given in clause A.12.5.1.1.2-2. The test parameters of Cell 2 are given in Table A.12.5.1.1.2-3. The SFTD between PCell and NR target cell shall be set by the test equipment to one of the time differences in Table A.12.5.1.1.2-4.

Table A.12.5.1.1.2-1: Supported test configurations for SFTD accuracy with NR target cell under CCA

Config	Description
1	LTE FDD NR with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	LTE TDD NR with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.12.5.1.1.2-2: Test parameters for inter-RAT SFTD accuracy with NR target cell under CCA (Cell 1)

Parameter	Unit	Test 1
E-UTRA RF Channel Number		1
Duplex mode		FDD or TDD
TDD special subframe configuration[Note1]		6
TDD uplink-downlink configuration[Note1]		1
$BW_{channel}$		5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100
PDSCH parameters: DL Reference Measurement Channel[Note2]		5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD 5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD 5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD
OCNG Patterns[Note2]		5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD 5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD
PBCH_RA	dB	0
PBCH_RB	dB	
PSS_RA	dB	
SSS_RA	dB	
PCFICH_RB	dB	
PHICH_RA	dB	
PHICH_RB	dB	
PDCCH_RA	dB	
PDCCH_RB	dB	
PDSCH_RA	dB	
PDSCH_RB	dB	
OCNG_RA[Note3]	dB	
OCNG_RB[Note3]	dB	
N_{oc}[Note4]	dBm/15 kHz	-104
$\hat{E}_s/N_{oc}$	dB	-3
$\hat{E}_s/I_{ot}$	dB	-3
RSRP [Note5]	dBm/15 kHz	-107
SCH_RP [Note5]	dBm/15 kHz	-107

Io Note5	dBm/Ch BW	-74.45 +10log ($N_{RB,c}$ /50)
Propagation Condition		AWGN
Antenna Configuration		1x2

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: Es/Iot, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.12.5.1.1.2-3: Test parameters for inter-RAT SFTD accuracy with NR target cell under CCA (Cell 2)

Parameter		Unit	Test 1
Duplex mode			TDD
TDD Configuration			TDDConf.1.1 CCA
$BW_{channel}$		MHz	40: $N_{RB,c}$ = 106
DL CCA model			As specified in clause A.3.20.2.1
DL CCA probability for semi-static channel access Note6,8	P_{CCA}		[0.75]
DL CCA probability for dynamic channel access Note7,8	$P_{CCA_DL_1}$		[0.75]
	$P_{CCA_DL_2}$		[0.75]
SSB configuration for semi-static channel access Note6,8			SSB.1 CCA
SSB configuration for dynamic channel access Note7,8			SSB.2 CCA
SMTC configuration			SMTC.1
DBT window configuration			DBT.1
OCNG Patterns			OP.1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} Note2		dBm/15kHz	-104
N_{oc} Note2		dBm/SSB SCS	-101
$\hat{E}_s/I_{ot}$		dB	-3
$\hat{E}_s/N_{oc}$		dB	-3
SS-RSRP Note3		dBm/SCS	-104
Io Note3		dBm/38.16 MHz	-68.18
Propagation condition			AWGN

Antenna configuration		1x2
Note 1:	OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols in slots with downlink transmission bursts.	
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.	
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.	
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.	
Note 5:	The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification	
Note 6:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.	
Note 7:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy.	
Note 8:	For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.	

Table A.12.5.1.1.2-4: Timing offsets for inter-RAT SFTD accuracy test with NR target cell under CCA

Configuration	SFN offset between PCell and NR neighbor cell	Frame boundary offset between PCell and NR neighbour cell (Ts)
1	100	-122000
2	300	-60540
3	500	1000
4	700	62540
5	900	124000

A.12.5.1.1.3 Test Requirements

The SFTD reported by the UE consists of 2 elements, SFN offset and frame boundary offset between PCell and inter-RAT NR target cell. The reported SFTD accuracy shall fulfil the requirement in clause 9.1.27 in TS 36.133 [15].

A.12.5.2 E-UTRAN–NR SS-RSRP

A.12.5.3 E-UTRAN–NR SS-RSRQ

A.12.5.4 E-UTRAN–NR SS-SINR

A.12.5.5 E-UTRAN–NR RSSI

A.12.5.6 E-UTRAN–NR channel occupancy

A.13 NR Standalone Tests with NR SCell under CCA and All Other NR Cells in FR1

A.13.1 Timing

A.13.1.1 UE transmit timing

A.13.1.2 Timing advance

A.13.2 Signalling characteristics

A.13.2.1 Interruption

A.13.2.1.1 NR interruptions during SCell operations with CCA on SCell

A.13.2.1.1.1 Test Purpose and Environment

The purpose of this test is to verify NR PCell interruptions during SCell operations on an NR SCC with CCA, This test will verify the interruption requirements for NR PCell in NR SA specified in TS 38.133 clause 8.2.2 and 8.3A. Supported test configurations are shown in table A.13.2.1.1.1-1.

The general test parameters and NR cell specific test parameters are given in Table A.13.2.1.1.1-2 and A.13.2.1.1.1-3 below. In the test there are two cells: Cell1 and Cell2. Cell1 and Cell2 are PCell and SCell. Cell 1 is on a licenced band and cell 2 is subject to CCA. The test consists of five time periods, with duration of T1, T2, T3, T4 and T5. Prior to the start of the time duration T1, the UE is connected to Cell1 and Cell2. Throughout the test, the PCell are continuously scheduled in DL. The power of signals on cell 1 and 2 is not modified during the test.

Prior to T1, a connection is started with cell 1 as the PCell, and measurements of cell 2 are configured with gap pattern 0, such that cell 2 is reported. This ensures that cell 2 is known at the start of time period T1 and is not itself part of the tested requirement.

The point in time at which the RRC message implying Scell addition is received at the UE antenna connector, defines the start of time period T1. Measurement gap pattern 0 shall be stopped when the Scell is configured.

The point in time at which the MAC-CE message implying Scell activation is received at the UE antenna connector, defines the start of time period T2.

The point in time at which the MAC-CE message implying Scell deactivation is received at the UE antenna connector, defines the start of time period T3.

The point in time at which deactivation delay requirement in section 8.3A are satisfied defines the start of time period T4

The point in time at which the RRC message implying Scell release is received at the UE antenna connector, defines the start of time period T5.

Table A.13.2.1.1.1-1: Interruptions during measurements on deactivated NR SCC supported test configurations

Configuration	Description
1	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode; With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode; With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

3	Without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode; With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.13.2.1.1.1-2: General test parameters for Interruptions during measurements on deactivated NR SCC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2	
Active PCell		Cell1	PCell on NR RF channel number 1.
Configured dSCell		Cell2	SCell on NR RF channel number 2
CP length		Normal	Applicable to Cell1, Cell2
DRX		OFF	
Measurement gap pattern Id		OFF	
SCell measurement cycle (measCycleSCell)	ms	160	
T1	s	<10	
T2	s	<10	
T3	s	<10	
T4	s	<10	
T5	s	<10	

Table A.13.2.1.1.1-3: NR cell specific test parameters for Interruptions during measurements on deactivated NR SCC

Parameter		Unit	Cell1					Cell2				
			T1	T2	T3	T4	T5	T1	T2	T3	T4	T5
TDD configuration	Config 1		---					TDDConf.1.1 CCA				
	Config 2		TDDConf.1.1									
	Config 3		TDDConf.2.1									
$BW_{channel}$	Config 1,2	MHz	10: $N_{RB,c}$ = 52					40: $N_{RB,c}$ = 106				
	Config 3		40: $N_{RB,c}$ = 106									
DL CCA model	Config 1,2,3		---					As specified in clause A.3.20.2.1				
DL CCA probability for semi-static channel access[Note6,8]	P_{CCA_DL}		---					0.9375				
DL CCA probability for dynamic channel access[Note7,8]	$P_{CCA_DL_1}$		---					0.75				
	$P_{CCA_DL_2}$		---					0.75				
Initial BWP Configuration	Config 1,2,3		DLBWP.0.1					DLBWP.0.1				
Dedicated DL BWP Configuration	Config 1,2,3		DLBWP.1.1					DLBWP.1.1				
Initial UL BWP Configuration	Config 1,2,3		ULBWP.0.1					ULBWP.0.1				
Dedicated UL BWP Configuration	Config 1,2,3		ULBWP.1.1					ULBWP.1.1				
PDSCH reference meassurement channel	Config 1		SR.1.1 FDD					---				
	Config 2		SR.1.1 TDD									
	Config 3		SR.2.1 TDD									
RMSI CORESET Parameters	Config 1		CR.1.1 FDD					---				
	Config 2		CR.1.1 TDD									
	Config 3		CR.2.1 TDD									
PDCCH CORESET Parameters	Config 1		CCR.1.1 FDD					---				
	Config 2		CCR.1.1 TDD									
	Config 3		CCR.2.1 TDD									
TRS configuration	Config 1		TRS.1.1 FDD					---				

	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
OCNG Pattern			OP.1	OP.1
SSB configuration for semi-static channel access[Note6,8]	Config 1,2		SSB.1 FR1	SSB.1 CCA
	Config 3		SSB.2 FR1	
SSB configuration for dynamic channel access[Note7,8]	Config 1,2		SSB.1 FR1	SSB.2 CCA
	Config 3		SSB.2 FR1	
SMTC Configuration	Config 1,2,3		SMTC.1	SMTC.1
DBT window configuration	Config 1,2,3		---	DBT.1
TCI state			TCI.State.0	---
Correlation Matrix and Antenna Configuration			1x2 Low	1x2 Low
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc}[Note 2]	Config 1,2,3	dBm/15 kHz	-104	-104
N_{oc}[Note 2]	Config 1,2	dBm/SCS	-104	-101
	Config 3		-101	
SS-RSRP [Note 3]	Config 1,2,3	dBm/15 kHz	-87	-87
$\hat{E}_s/I_{ot}$		dB	17	17
$\hat{E}_s/N_{oc}$		dB	17	17
Propagation Condition			AWGN	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For Cell 2 with CCA model, OCNG is transmitted only in slots with downlink transmission bursts and is not transmitted during muted slots or during DBT windows.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modeled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselvess.

Note 4: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell at the UE antenna connector including time alignment error between the two cells

Note 5: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.

Note 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.

Note 8: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

A.13.2.1.1.2 Test Requirements

The UE shall meet the interruption requirements for SCell addition on the victim Pcell in clause 8.2.1 during time T1

The UE shall meet the interruption requirements for SCell activation on the victim Pcell in clause 8.2.1during time T2. There shall be a single interruption with time window as specified in clause 8.3A.2

The UE shall meet the interruption requirements for SCell deactivation on the victim PCell in clause 8.2.1during time T3. There shall be a single interruption with time window as specified in clause 8.3A.3

The UE shall meet the interruption requirements for deactivated SCell measurements on the victim PCell in clause 8.2.1 during time T4. The interruptions shall be within the time window as specified in clause 8.3A.3

The UE shall meet the interruption requirements for SCell release on the victim PCell in clause 8.2.1during time T5.

The rate of correct events observed during repeated tests shall be at least 90%.

A.13.2.2 SCell activation and deactivation delay

A.13.2.2.1 SCell Activation and Deactivation of known SCell under CCA, 160 ms SCell measurement cycle

A.13.2.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that SCell activation and deactivation delays for SCell on NR-U SCC with CCA are within the requirements stated in clause 8.3A, when the SCell is known by the UE at the time of activation and the configured SCell measurement cycle is 160 ms.

The supported test configurations are shown in Table A.13.2.2.1.1-1.

The test parameters are given in Table A.13.2.2.1.1-2 and cell-specific parameters in Table A.13.2.2.1.1-3 below. The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are two carriers, each with one cell: Cell 1 (PCell) on radio channel 1 (PCC) in NR FR1, and Cell2 (SCell) on radio channel 2 (SCC) in NR with CCA. Before the test starts the UE is connected to Cell 1, but is not aware of Cell 2, as the UE is only monitoring the PCC. The UE shall be continuously scheduled in the PCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 2) becomes configured on radio channel 2. The UE now starts monitoring the SCC. At the end of T1, the test equipment sends a MAC message for activation of the SCell.

The point in time at which the MAC message is received at the UE antenna connector, in a slot # denoted *m*, defines the start of time period T2. The UE shall be able to report a valid CSI in PCell for the activated SCell at latest in slot $m + \frac{T_{\text{HARQ}} + T_{\text{activation_time_withCCA}} + T_{\text{CSI_Reporting_withCCA}}}{\text{NR slot length}}$, as defined in clause 8.3A.2. The UE shall start reporting CSI in PCell after at least one CSI-RS transmission occasion for channel measurement and reporting after slot *m*+ $\frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$ and shall report CQI index 0 (out-of-range) until the SCell activation has been completed. Any PCell interruption shall fall within the time window specified in clause 8.3A.2. At the end of T2 the test equipment sends a MAC message for deactivation of the SCell.

The point in time at which the MAC message is received by at the UE antenna connector, in a slot # denoted *n*, defines the start of time period T3. The UE shall complete the activation at latest in slot $n + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$. Any PCell interruption shall fall within the time window specified in clause 8.3A.3.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell during activation and deactivation of SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received, while taking into account CCA failures on SCC.

The test equipment verifies the deactivation time by counting the slots from the time when the SCell deactivation command is sent until CQI reporting for SCell is discontinued.

Table A.13.2.2.1.1-1: Supported test configurations for SCell Activation and Deactivation of known SCell under CCA, 160 ms SCell measurement cycle

Configuration	Description
1	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode; With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

2	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode; With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
3	Without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode; With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.13.2.2.1.1-2: General test parameters for known SCell activation with SCell under CCA, 160 ms SCell measurement cycle

Parameter	Unit	Value	Comment
RF Channel Number		1,2	Two radio channels (1, 2) are used for this test
Active PCell		Cell 1	Primary cell on NR RF channel number 1.
Configured deactivated SCell		Cell 2	Configured deactivated secondary cell on NR RF channel number 2
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
CQI/PMI periodicity and offset configuration index		0	CQI reporting for SCell every fourth slot
SCell measurement cycle (measCycleSCell)	ms	160	
Cell2 timing offset to cell1	µs	0	
Time alignment error between cell2 and cell1	µs	≤ TAE as specified in TS 38.104 [13] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
T1	s	7	During this time the PCell shall be known and the SCell configured and detected.
T2	s	1	During this time the UE shall activate the SCell.
T3	s	1	During this time the UE shall deactivate the SCell.
T_{HARQ}	ms	k_1×NR slot length	k_1 is a number of slots and is indicated by the PDSCH-to-HARQ-timing-indicator field in the DCI format, if present, or provided by *dl-DataToUL-ACK*, the value of k should be the minimum value defined in TS 38.213 [3] depends on UE's capability
$T_{CSI_Reporting}$	ms	$10 + 5 \cdot 2^{\mu_{DL}}$	the delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting (clause 5.2.2.5 in TS 38.214) and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2] μ_{DL} is the subcarrier spacing configuration for DL

Table A.13.2.2.1.1-3: Cell specific test parameters for known FR1 SCell activation case with SCell under CCA, 160 ms SCell measurement cycle

Parameter		Unit	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Duplex mode	Config 1		FDD			TDD		
	Config 2,3		TDD					
TDD configuration	Config 1		---			TDDConf.1.1 CCA		
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
$BW_{channel}$	Config 1,2	MHz	10: $N_{RB,c}$ = 52			40: $N_{RB,c}$ = 106		
	Config 3		40: $N_{RB,c}$ = 106					

DL CCA model			---	As specified in clause A.3.26.2.1
DL CCA probability for semi-static channel access Note5,7	P_{CCA_DL}		---	0.9357
DL CCA probability for dynamic channel access Note6,7	$P_{CCA_DL_1}$		---	0.75
	$P_{CCA_DL_2}$		---	0.75
P_{CCA_UL}				1
L_{CCA_DL} Note 8				2
W_{CCA_DL} Note 8		ms		$T_{activation_time_withCCA}$
Initial downlink BWP configuration			DLBWP.0.2	DLBWP.0.2
Initial uplink BWP configuration			ULBWP.0.1	ULBWP.0.1
Dedicated downlink BWP configuration			DLBWP.0.2	DLBWP.0.2
Dedicated uplink BWP configuration			ULBWP.0.1	ULBWP.0.1
TCI state			TCI.State.0	TCI.State.0
TRS Configuration	Config 1		TRS.1.1 FDD	TRS.1.2 TDD
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	SR.1.1 CCA
	Config 2		SR.1.1 TDD	
	Config 3		SR.2.1 TDD	
Dedicated CORESET parameters	Config 1		CCR.1.1 FDD	CCR.1.3 CCA
	Config 2		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD	
RMSI CORESET parameters	Config 1		CR.1.1 FDD	CR.1.1 CCA
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
OCNG Patterns Note1			OP.1	OP.1
SSB Configuration for semi-static channel access Note5,7	Config 1,2		SSB.1 FR1	SSB.1 CCA
	Config 3		SSB.2 FR1	
SSB Configuration for dynamic channel access Note6,7	Config 1,2		SSB.1 FR1	SSB.2 CCA
	Config 3		SSB.2 FR1	
SMTC configuration			SMTC.1	SMTC.1
DBT window configuration			---	DBT.1
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS Note1				
EPRE ratio of OCNG to OCNG DMRS Note1				
N_{oc} Note2	Config 1,2	dBm/15kHz	-104	-104
	Config 3			
N_{oc} Note2	Config 1,2	dBm/SCS	-104	-101
	Config 3		-101	
$\hat{E}_s/I_{ot}$		dB	17	17
$\hat{E}_s/N_{oc}$		dB	17	17
SS-RSRP Note3	Config 1,2	dBm/SCS	-87	-84
	Config 3		-84	-84
Io Note3	Config 1,2		-58.96	-52.87
	Config 3		-52.87	-52.87
Propagation condition		-	AWGN	

Note 1: OCNG shall be used such that resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For Cell 2 with CCA model, OCNG is transmitted only

	in slots with downlink transmission bursts and is not transmitted during muted slots or during DBT windows.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.
Note 5:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 6:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 7:	For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.
Note 8:	As specified in clause 8.3A for $L_{1,max}$, $L_{2,1,max}$, $L_{2,2,max}$, $L_{3,1,max}$, and $L_{3,2,max}$

A.13.2.2.1.2 Test Requirements

During T2, the UE shall send the first CSI report for SCell after at least one CSI-RS transmission occasion for channel measurement and reporting after slot $m+1+\frac{T_{HARQ}+3ms}{NR\ slot\ length}$.

During T2, conditioned on that downlink CCA failures L_1 and $L_{2,2}$ experienced in the SCell fulfill $L_1 \leq L_{1,max}$ and $L_{2,2} \leq L_{2,2,max}$ with $L_{1,max} = 2$ and $L_{2,2,max} = 2$, respectively, the UE shall send the first valid CSI report (non-zero CQI) for the SCell no later than slot $m + (T_{HARQ}+T_{activation_time_withCCA} + T_{CSI_Reporting_withCCA})$/NR_slot_length, where $T_{activation_time_withCCA} = T_{FirstSSB} + L_1*T_{rs} + 5ms$ and $T_{CSI_reporting_withCCA} = T_{CSI_reporting} + L_{2,2}*T_{CSI\text{-}RS} + T_{CSI_ReportingDelay}$, as specified in clause 8.3A.2.

During T3, the UE shall stop sending CSI reports for SCell at latest in slot $n + \frac{T_{HARQ}+3ms}{NR\ slot\ length}$, as defined in clause 8.3A.3.

During T2, interruption on PCell shall not occur outside slot $m+1+\frac{T_{HARQ}}{NR\ slot\ length}$ to slot $m+1+\frac{T_{HARQ}+3+T_X}{NR\ slot\ length}$ with $T_X = T_{FirstSSB}$.

During T3, interruption on PCell shall not occur outside slot $n+1+T_{HARQ}$/NR_slot_length to slot $n+1+(T_{HARQ}+3ms)$/NR_slot_length.

The interruption on PCell shall not be more than specified for SA in clause 8.2.2.2.2.

The rate of correctly observed SCell activation delays and SCell deactivation delays shall for repeated tests be at least 90%.

A.13.2.2.2 SCell Activation and Deactivation of known SCell under CCA, 640 ms SCell measurement cycle

A.13.2.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that SCell activation and deactivation delays for SCell on NR-U SCC with CCA are within the requirements stated in clause 8.3A, when the SCell is known by the UE at the time of activation and the configured SCell measurement cycle is 640 ms.

The supported test configurations are same as in Table A.13.2.2.1.1-1 above.

The test parameters are same as in Table A.13.2.2.1.1-2 above, except for parameters listed below in Table A.13.2.2.2.1-1. The cell-specific parameters are same as in Table A.13.2.2.1.1-3 above.

The test execution is the same as described in clause A.13.2.2.1 above, except that downlink CCA failures $L_{2,1}$ and $L_{2,2}$ with limits $L_{2,1} \leq L_{2,1,max}$ and $L_{2,2} \leq L_{2,2,max}$ replace L_1 as described in clause 8.3A.2 for activation of known SCell with a measurement cycle larger than 160 ms.

Table A.13.2.2.2.1-1: General test parameters for known SCell activation with SCell under CCA, 640 ms SCell measurement cycle

Parameter	Unit	Value	Comment
SCell measurement cycle (measCycleSCell)	ms	640	

A.13.2.2.2.2 Test Requirements

During T2, the UE shall send the first CSI report for SCell after at least one CSI-RS transmission occasion for channel measurement and reporting after slot m+1+$\frac{T_{HARQ}+3ms}{NR\ slot\ length}$.

During T2, conditioned on that downlink CCA failures $L_{2,1}$ and $L_{2,2}$ experienced in the SCell fulfill $L_{2,1} \leq L_{2,1,max}$ and $L_{2,2} \leq L_{2,2,max}$ with $L_{2,1,max}$ = 2 and $L_{2,2,max}$ = 2, respectively, the UE shall send the first valid CSI report (non-zero CQI) for the SCell no later than slot m + (T_{HARQ}+$T_{activation_time_withCCA}$ + $T_{CSI_Reporting_withCCA}$)/NR_slot_length, where $T_{activation_time_withCCA}$ = $T_{FirstSSB_MAX}$ + $L_{2,1}$*T_{SMTC_MAX} + (1 +$L_{2,2}$)*T_{rs} + 5ms and $T_{CSI_reporting_withCCA}$ = $T_{CSI_reporting}$ + $T_{CSI_ReportingDelay}$, as specified in clause 8.3A.2.

During T3, the UE shall stop sending CSI reports for SCell at latest in slot $n + \frac{T_{HARQ}+3ms}{NR\ slot\ length}$, as defined in clause 8.3A.3.

During T2, interruption on PCell shall not occur outside slot m +1+$\frac{T_{HARQ}}{NR\ slot\ length}$ to slot m +1+$\frac{T_{HARQ}+3+T_X}{NR\ slot\ length}$ with T_X = $T_{FirstSSB}$.

During T3, interruption on PCell shall not occur outside slot n +1+T_{HARQ}/NR_slot_length to slot n+1+(T_{HARQ} +3ms)/NR_slot_length.

The interruption on PCell shall not be more than specified for SA in clause 8.2.2.2.2.

The rate of correctly observed SCell activation delays and SCell deactivation delays shall for repeated tests be at least 90%.

A.13.2.2.3 SCell Activation and Deactivation of unknown SCell under CCA

A.13.2.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that SCell activation and deactivation delays for SCell on NR-U SCC with CCA are within the requirements stated in clause 8.3A, when the SCell is unknown to the UE at the time of activation.

The supported test configurations are same as in Table A.13.2.2.1.1-1 above.

The test parameters are same as in Table A.13.2.2.1.1-2 above, except for parameters listed below in Table A.13.2.2.3.1-1. The cell-specific parameters are same as in Table A.13.2.2.1.1-3 above.

The test execution is the same as described in clause A.13.2.2.1 above, except that downlink CCA failures $L_{3,1}$ and $L_{3,2}$ with limits $L_{3,1} \leq L_{3,1,max}$ and $L_{3,2} \leq L_{3,2,max}$ replace L_1 as described in clause 8.3A.2 for activation of unknown SCell.

Table A.13.2.2.3.1-1: General test parameters for unknown SCell activation with SCell under CCA

Parameter	Unit	Value	Comment
T1	s	0.1	During this time period the PCell shall be known and the SCell configured, but not detected.

A.13.2.2.3.2 Test Requirements

During T2, the UE shall send the first CSI report for SCell after at least one CSI-RS transmission occasion for channel measurement and reporting after slot $m+1+\frac{T_{HARQ}+3ms}{NR\ slot\ length}$.

During T2, conditioned on that downlink CCA failures $L_{3,1}$ and $L_{3,2}$ experienced in the SCell fulfill $L_{3,1} \leq L_{3,1,max}$ and $L_{3,2} \leq L_{3,2,max}$ with $L_{3,1,max} = 2$ and $L_{3,2,max} = 2$, respectively, the UE shall send the first valid CSI report (non-zero CQI) for the SCell no later than slot $m + (T_{HARQ}+T_{activation_time_withCCA} + T_{CSI_Reporting_withCCA})/NR_slot_length$, where $T_{activation_time_withCCA} = T_{FirstSSB_MAX} + (1 + L_{3,1})*T_{SMTC_MAX} + (2 + L_{3,2})*T_{rs}$ + 5ms and $T_{CSI_reporting_withCCA} = T_{CSI_reporting} + T_{CSI_ReportingDelay}$, as specified in clause 8.3A.2.

During T3, the UE shall stop sending CSI reports for SCell at latest in slot $n + \frac{T_{HARQ}+3ms}{NR\ slot\ length}$, as defined in clause 8.3A.3.

During T2, interruption on PCell shall not occur outside slot $m+1+\frac{T_{HARQ}}{NR\ slot\ length}$ to slot $m+1+\frac{T_{HARQ}+3+T_X}{NR\ slot\ length}$ with $T_X = T_{FirstSSB}$.

During T3, interruption on PCell shall not occur outside slot $n+1+T_{HARQ}/NR_slot_length$ to slot $n+1+(T_{HARQ}+3ms)/NR_slot_length$.

The interruption on PCell shall not be more than specified for SA in clause 8.2.2.2.2.

The rate of correctly observed SCell activation delays and SCell deactivation delays shall for repeated tests be at least 90%.

A.13.2.3 Void

A.13.3 Measurement procedure

A.13.3.1 Intra-frequency measurements

A.13.3.1.1 Event-triggered reporting tests on SCC without gaps under non-DRX

A.13.3.1.1.1 Test purpose and environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clauses 9.2A.5.1 and 9.2A.5.2.

A.13.3.1.1.2 Test parameters

Three cells are deployed in the test, which are FR1 PCell (Cell 1), and two cells on the same carrier frequency with CCA and transmit SSBs in DBT windows according to DL CCA model: SCell (Cell 2) and a neighbour cell (Cell 3). The test parameters for the three cells are given in Table A.13.3.1.1.2-1 and A.13.3.1.1.2-2 below. In the measurement control information, a measurement object is configured for the frequency of the SCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1 and T2, respectively. During time duration T1, the UE shall not have any timing information of Cell 3.

FFS: The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

The test is conducted for SS-RSRP, SS-RSRQ, and SS-SINR:

- In the first test (Test 1), the UE is configured with SS-RSRP as Event A3 measurement quantity.
- In the second test (Test 2), the UE is configured with SS-RSRQ as Event A3 measurement quantity.

- In the third test (Test 3), the UE is configured with SS-SINR as Event A3 measurement quantity.

Table A.13.3.1.1.2-1: Supported test configurations

Configuration	Description
1	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
3	Without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Table A.13.3.1.1.2-2: General test parameters for intra-frequency event triggered reporting without gaps

Parameter	Unit	Test configuration	Value			Comment
			Test 1	Test 2	Test 3	
Active PCell		1, 2, 3	Cell 1			
Active SCell		1, 2, 3	Cell 2			
Neighbour cell		1, 2, 3	Cell 3			Cell to be identified.
RF Channel Number		1, 2, 3	1: Cell 1 2: Cell 2 and Cell 3			
DL CCA model			As specified in clause A.3.20.2.1			
UL CCA model			As specified in clause A.3.20.2.2			
SSB configuration		1	Cell 1: SSB.1 FR1 Cell 2,3: TBD			
		2	Cell 1: SSB.1 FR1 Cell 2,3: TBD			
		3	Cell 1: SSB.2 FR1 Cell 2,3: TBD			
SMTC configuration		1	Cell 1: SMTC.2 Cell 2,3: N/A			
		2	Cell 1: SMTC.1 Cell 2,3: N/A			
		3	Cell 1: SMTC.1 Cell 2,3: N/A			
DBT window configuration		1, 2, 3	Cell 1: N/A Cell 2,3: TBD			
A3-Offset	dB	1, 2, 3	-4.5			
Event A3 measurement quantity			SS-RSRP	SS-RSRQ	SS-SINR	
CP length		1, 2, 3	Normal			
Hysteresis	dB	1, 2, 3	0			
Time To Trigger	s	1, 2, 3	0			
Filter coefficient		1, 2, 3	0			L3 filtering is not used
DRX		1, 2, 3				OFF
Time offset between Cell 2 and Cell 3		1	3 ms			Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		2	3 µs			Synchronous cells
		3	3 µs			Synchronous cells
deriveSSB-IndexFromCell		1	*False*			
		2	*True*			
		3	*True*			
T1	s	1, 2, 3	TBD			

T2	s	1, 2, 3	TBD	

Table A.13.3.1.1.2-3: Cell-specific test parameters for intra-frequency event-triggered reporting without gaps

Parameter	Unit	Test configuration	Cell 1		Cell 2		Cell 3	
			T1	T2	T1	T2	T1	T2
DL CCA probability P_{CCA_DL}		1, 2, 3	N/A		TBD	TBD	TBD	TBD
UL CCA probability P_{CCA_UL}		1, 2, 3	N/A		TBD	TBD	TBD	TBD
TDD configuration		1	N/A		TBD		TBD	
		2	TDDConf.1.1		TBD		TBD	
		3	TDDConf.2.1		TBD		TBD	
PDSCH RMC configuration		1	SR.1.1 FDD		TBD		TBD	
		2	SR.1.1 TDD					
		3	SR.2.1 TDD					
RMSI CORESET RMC configuration		1	CR.1.1 FDD		TBD		TBD	
		2	CR.1.1 TDD		TBD		TBD	
		3	CR.2.1 TDD		TBD		TBD	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		TBD		TBD	
		2	CCR.1.1 TDD		TBD		TBD	
		3	CCR.2.1 TDD		TBD		TBD	
OCNG Patterns		1, 2, 3	OP.1		TBD		TBD	
TRS Configuration		1	TRS.1.1 FDD		TBD		TBD	
		2	TRS.1.1 TDD		TBD		TBD	
		3	TRS.1.2 TDD		TBD		TBD	
IInitial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1		DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1		ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2, 3	SSB		SSB		SSB	
N_{oc} Note 2	dBm/SCS	1	-98		TBD		TBD	
		2	-98		TBD		TBD	
		3	-95		TBD		TBD	
N_{oc} Note 2	dBm/15 kHz	1	-98		TBD		TBD	
		2	-98		TBD		TBD	
		3	-95		TBD		TBD	
$\hat{E}_s / I_{ot}$ Note 5	dB	1	4	-1.46	TBD	TBD	-Infinity	TBD
		2			TBD	TBD	-Infinity	TBD
		3			TBD	TBD	-Infinity	TBD
$\hat{E}_s / N_{oc}$ Note 5	dB	1	4	4	TBD	TBD	-Infinity	TBD
		2			TBD	TBD	-Infinity	TBD
		3			TBD	TBD	-Infinity	TBD
SS-RSRP Note 3,5	dBm/SCS kHz	1	-94	-94	TBD	TBD	-Infinity	TBD

		2	-94	-94	TBD	TBD	-Infinity	TBD
		3	-91	-91	TBD	TBD	-Infinity	TBD
Io	dBm/9.36 MHz	1	-64.60	-62.25	TBD	TBD	TBD	TBD
	dBm/9.36 MHz	2	-64.60	-62.25	TBD	TBD	TBD	TBD
	dBm/38.16 MHz	3	-58.50	-56.16	TBD	TBD	TBD	TBD
Propagation Condition		1, 2, 3	AWGN					

NOTE 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: DL and UL CCA probabilities apply for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.
NOTE 5: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.

A.13.3.1.1.3 Test Requirements

The UE shall send one Event A3 triggered measurement report (SS-RSRP in Test 1, SS-RSRQ in Test 2, SS-SINR in Test 3), with a measurement reporting delay less than D1 ms from the beginning of time period T2.

Editor's note: D1=TBD.

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

FFS: NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.13.3.1.2 Event-triggered reporting tests on SCC without gaps under DRX

A.13.3.1.2.1 Test purpose and environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clauses 9.2A.5.1 and 9.2A.5.2.

A.13.3.1.2.2 Test parameters

Three cells are deployed in the test, which are FR1 PCell (Cell 1), and two cells on the same carrier frequency with CCA and transmit SSBs in DBT windows according to DL CCA model: SCell (Cell 2) and a neighbour cell (Cell 3). The test parameters for the three cells are given in Table A.13.3.1.2.2-1 and A.13.3.1.2.2-2 below. In the measurement control information, a measurement object is configured for the frequency of the SCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1 and T2, respectively. During time duration T1, the UE shall not have any timing information of Cell 3.

FFS: The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furhtermore UE is allocated with PUSCH resource at every DRX cycle.

The test is conducted for SS-RSRP, SS-RSRQ, and SS-SINR:

- In Test 1 and Test 2, the UE is configured with SS-RSRP as Event A3 measurement quantity.
- In Test 3 and Test 4, the UE is configured with SS-RSRQ as Event A3 measurement quantity.
- In Test 5 and Test 6, the UE is configured with SS-SINR as Event A3 measurement quantity.

Table A.13.3.1.2.2-1: Supported test configurations

Configuration	Description
1	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
3	Without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Table A.13.3.1.2.2-2: General test parameters for intra-frequency event triggered reporting without gaps with DRX

Parameter	Unit	Test configuration	Value						Comment
			Test 1	Test 2	Test 3	Test 4	Test 5	Test 6	
Active PCell		1, 2, 3	Cell 1						
Active SCell		1, 2, 3	Cell 2						
Neighbour cell		1, 2, 3	Cell 3						Cell to be identified.
RF Channel Number		1, 2, 3	1: Cell 1 2: Cell 2 and Cell 3						
DL CCA model			As specified in clause A.3.20.2.1						
UL CCA model			As specified in clause A.3.20.2.2						
SSB configuration		1	Cell 1: SSB.1 FR1 Cell 2,3: TBD						
		2	Cell 1: SSB.1 FR1 Cell 2,3: TBD						
		3	Cell 1: SSB.2 FR1 Cell 2,3: TBD						
SMTC configuration		1	Cell 1: SMTC.2 Cell 2,3: N/A						
		2	Cell 1: SMTC.1 Cell 2,3: N/A						
		3	Cell 1: SMTC.1 Cell 2,3: N/A						
DBT window configuration		1, 2, 3	Cell 1: N/A Cell 2,3: TBD						
A3-Offset	dB	1, 2, 3	-4.5						
Event A3 measurement quantity			SS-RSRP		SS-RSRQ		SS-SINR		
CP length		1, 2, 3	Normal						
Hysteresis	dB	1, 2, 3	0						
Time To Trigger	s	1, 2, 3	0						
Filter coefficient		1, 2, 3	0						L3 filtering is not used
DRX		1, 2, 3	DRX.1	DRX.2	DRX.1	DRX.2	DRX.1	DRX.2	
Time offset between Cell 2 and Cell 3		1	3 ms						Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		2	3 μs						Synchronous cells

		3	3 μs	Synchronous cells
deriveSSB-IndexFromCell		1	*False*	
		2	*True*	
		3	*True*	
T1	s	1, 2, 3	TBD	
T2	s	1, 2, 3	TBD TBD TBD TBD TBD TBD	

Table A.13.3.1.2.2-3: Cell-specific test parameters for intra-frequency event-triggered reporting without gaps

Parameter	Unit	Test configuration	Cell 1		Cell 2		Cell 3	
			T1	T2	T1	T2	T1	T2
DL CCA probability P_{CCA_DL}		1, 2, 3	N/A		TBD	TBD	TBD	TBD
UL CCA probability P_{CCA_UL}		1, 2, 3	N/A		TBD	TBD	TBD	TBD
TDD configuration		1	N/A		TBD		TBD	
		2	TDDConf.1.1		TBD		TBD	
		3	TDDConf.2.1		TBD		TBD	
PDSCH RMC configuration		1	SR.1.1 FDD		TBD		TBD	
		2	SR.1.1 TDD					
		3	SR.2.1 TDD					
RMSI CORESET RMC configuration		1	CR.1.1 FDD		TBD		TBD	
		2	CR.1.1 TDD		TBD		TBD	
		3	CR.2.1 TDD		TBD		TBD	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		TBD		TBD	
		2	CCR.1.1 TDD		TBD		TBD	
		3	CCR.2.1 TDD		TBD		TBD	
OCNG Patterns		1, 2, 3	OP.1		TBD		TBD	
TRS Configuration		1	TRS.1.1 FDD		TBD		TBD	
		2	TRS.1.1 TDD		TBD		TBD	
		3	TRS.1.2 TDD		TBD		TBD	
IInitial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1		DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1		ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2, 3	SSB		SSB		SSB	
N_{oc} Note 2	dBm/SCS	1	-98		TBD		TBD	
		2	-98		TBD		TBD	
		3	-95		TBD		TBD	
N_{oc} Note 2	dBm/15 kHz	1	-98		TBD		TBD	
		2	-98		TBD		TBD	
		3	-95		TBD		TBD	
$\hat{E}_s/I_{ot}$ Note 5	dB	1	4	-1.46	TBD	TBD	-Infinity	TBD
		2			TBD	TBD	-Infinity	TBD

		3			TBD	TBD	-Infinity	TBD
$\hat{E}_s/N_{oc}$ Note 5	dB	1	4	4	TBD	TBD	-Infinity	TBD
		2			TBD	TBD	-Infinity	TBD
		3			TBD	TBD	-Infinity	TBD
SS-RSRP Note 3,5	dBm/SCS kHz	1	-94	-94	TBD	TBD	-Infinity	TBD
		2	-94	-94	TBD	TBD	-Infinity	TBD
		3	-91	-91	TBD	TBD	-Infinity	TBD
Io	dBm/9.36 MHz	1	-64.60	-62.25	TBD	TBD	TBD	TBD
	dBm/9.36 MHz	2	-64.60	-62.25	TBD	TBD	TBD	TBD
	dBm/38.16 MHz	3	-58.50	-56.16	TBD	TBD	TBD	TBD
Propagation Condition		1, 2, 3	AWGN					

NOTE 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: DL and UL CCA probabilities apply for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.
NOTE 5: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.

A.13.3.1.2.3 Test Requirements

The UE shall send one Event A3 triggered measurement report (SS-RSRP in Test 1 and Test 2, SS-RSRQ in Test 3 and Test 4, SS-SINR in Test 5 and Test 6), with a measurement reporting delay less than D1 ms from the beginning of time period T2.

Editor's note: D1=TBD (D1 is different for different DRX configurations).

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

FFS: NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.13.3.1.3 Event-triggered reporting tests on SCC with per-UE gaps under non-DRX

A.13.3.1.3.1 Test purpose and environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clauses 9.2A.6.1 and 9.2A.6.2.

A.13.3.1.3.2 Test parameters

Three cells are deployed in the test, which are FR1 PCell (Cell 1), and two cells on the same carrier frequency with CCA and transmit SSBs in DBT windows according to DL CCA model: SCell (Cell 2) and a neighbour cell (Cell 3). The test parameters for the three cells are given in Table A.13.3.1.3.2-1 and A.13.3.1.3.2-2 below. In the measurement control information, a measurement object is configured for the frequency of the SCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1 and T2, respectively. During time duration T1, the UE shall not have any timing information of Cell 3.

FFS: The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

The test is conducted for SS-RSRP, SS-RSRQ, and SS-SINR:

- In the first test (Test 1), the UE is configured with SS-RSRP as Event A3 measurement quantity.
- In the second test (Test 2), the UE is configured with SS-RSRQ as Event A3 measurement quantity.
- In the third test (Test 3), the UE is configured with SS-SINR as Event A3 measurement quantity.

Table A.13.3.1.3.2-1: Supported test configurations

Configuration	Description
1	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
3	Without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Table A.13.3.1.3.2-2: General test parameters for intra-frequency event triggered reporting with per-UE gaps

Parameter	Unit	Test configuration	Value			Comment
			Test 1	Test 2	Test 3	
Active PCell		1, 2, 3	Cell 1			
Active SCell		1, 2, 3	Cell 2			
Neighbour cell		1, 2, 3	Cell 3			Cell to be identified.
RF Channel Number		1, 2, 3	1: Cell 1 2: Cell 2 and Cell 3			
Measurement gap type		1, 2, 3	Per-UE gaps			
Measurement gap repitition periodicity	ms	1, 2, 3	40			
Measurement gap length	ms	1, 2, 3	[6]			
Measurement gap offset	ms	1, 2, 3	[39]			
DL CCA model			As specified in clause A.3.20.2.1			
UL CCA model			As specified in clause A.3.20.2.2			
SSB configuration		1	Cell 1: SSB.1 FR1 Cell 2,3: TBD			
		2	Cell 1: SSB.1 FR1 Cell 2,3: TBD			
		3	Cell 1: SSB.2 FR1 Cell 2,3: TBD			
SMTC configuration		1	Cell 1: SMTC.2 Cell 2,3: N/A			
		2	Cell 1: SMTC.1 Cell 2,3: N/A			
		3	Cell 1: SMTC.1 Cell 2,3: N/A			
DBT window configuration		1, 2, 3	Cell 1: N/A Cell 2,3: TBD			
CSI-RS parameters in Cell 1		1	CSI-RS.1.2 FDD resource #0			
		2	CSI-RS.1.2 TDD resource #0			
		3	CSI-RS.2.2 TDD resource #0			

A3-Offset	dB	1, 2, 3	-4.5			
Event A3 measurement quantity			SS-RSRP	SS-RSRQ	SS-SINR	
CP length		1, 2, 3	Normal			
Hysteresis	dB	1, 2, 3	0			
Time To Trigger	s	1, 2, 3	0			
Filter coefficient		1, 2, 3	0			L3 filtering is not used
DRX		1, 2, 3				OFF
Time offset between Cell 2 and Cell 3		1	3 ms			Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		2	3 μs			Synchronous cells
		3	3 μs			Synchronous cells
deriveSSB-IndexFromCell		1	*False*			
		2	*True*			
		3	*True*			
T1	s	1, 2, 3	TBD			
T2	s	1, 2, 3	TBD			

Table A.13.3.1.3.2-3: Cell-specific test parameters for intra-frequency event-triggered reporting without gap

Parameter	Unit	Test configuration	Cell 1		Cell 2		Cell 3	
			T1	T2	T1	T2	T1	T2
DL CCA probability P_{CCA_DL}		1, 2, 3	N/A		TBD	TBD	TBD	TBD
UL CCA probability P_{CCA_UL}		1, 2, 3	N/A		TBD	TBD	TBD	TBD
TDD configuration		1	N/A		TBD		TBD	
		2	TDDConf.1.1		TBD		TBD	
		3	TDDConf.2.1		TBD		TBD	
PDSCH RMC configuration		1	SR.1.1 FDD		TBD		TBD	
		2	SR.1.1 TDD					
		3	SR.2.1 TDD					
RMSI CORESET RMC configuration		1	CR.1.1 FDD		TBD		TBD	
		2	CR.1.1 TDD		TBD		TBD	
		3	CR.2.1 TDD		TBD		TBD	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		TBD		TBD	
		2	CCR.1.1 TDD		TBD		TBD	
		3	CCR.2.1 TDD		TBD		TBD	
OCNG Patterns		1, 2, 3	OP.1		TBD		TBD	
TRS Configuration		1	TRS.1.1 FDD		TBD		TBD	
		2	TRS.1.1 TDD		TBD		TBD	
		3	TRS.1.2 TDD		TBD		TBD	
IInitial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1		DLBWP.1.2		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1		DLBWP.1.2		ULBWP.1.1	

RLM-RS		1, 2, 3	SSB		SSB		SSB	
N_{oc} Note 2	dBm/SCS	1	-98		TBD		TBD	
		2	-98		TBD		TBD	
		3	-95		TBD		TBD	
N_{oc} Note 2	dBm/15 kHz	1	-98		TBD		TBD	
		2	-98		TBD		TBD	
		3	-95		TBD		TBD	
$\hat{E}_s/I_{ot}$ Note 5	dB	1	4	-1.46	TBD	TBD	-Infinity	TBD
		2			TBD	TBD	-Infinity	TBD
		3			TBD	TBD	-Infinity	TBD
$\hat{E}_s/N_{oc}$ Note 5	dB	1	4	4	TBD	TBD	-Infinity	TBD
		2			TBD	TBD	-Infinity	TBD
		3			TBD	TBD	-Infinity	TBD
SS-RSRP Note 3,5	dBm/SCS kHz	1	-94	-94	TBD	TBD	-Infinity	TBD
		2	-94	-94	TBD	TBD	-Infinity	TBD
		3	-91	-91	TBD	TBD	-Infinity	TBD
Io	dBm/9.36 MHz	1	-64.60	-62.25	TBD	TBD	TBD	TBD
	dBm/9.36 MHz	2	-64.60	-62.25	TBD	TBD	TBD	TBD
	dBm/38.16 MHz	3	-58.50	-56.16	TBD	TBD	TBD	TBD
Propagation Condition		1, 2, 3	AWGN					

NOTE 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: DL and UL CCA probabilities apply for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.
NOTE 5: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.

A.13.3.1.3.3 Test Requirements

The UE shall send one Event A3 triggered measurement report (SS-RSRP in Test 1, SS-RSRQ in Test 2, SS-SINR in Test 3), with a measurement reporting delay less than D1 ms from the beginning of time period T2.

Editor's note: D1=TBD.

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

FFS: NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.13.3.1.4 Event-triggered reporting tests on SCC with per-UE gaps under DRX

A.13.3.1.4.1 Test purpose and environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clauses 9.2A.6.1 and 9.2A.6.2.

A.13.3.1.4.2 Test parameters

Three cells are deployed in the test, which are FR1 PCell (Cell 1), and two cells on the same carrier frequency with CCA and transmit SSBs in DBT windows according to DL CCA model: SCell (Cell 2) and a neighbour cell (Cell 3). The test parameters for the three cells are given in Table A.13.3.1.4.2-1 and A.13.3.1.4.2-2 below. In the measurement control information, a measurement object is configured for the frequency of the SCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1 and T2, respectively. During time duration T1, the UE shall not have any timing information of Cell 3.

FFS: The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furhtermore UE is allocated with PUSCH resource at every DRX cycle.

The test is conducted for SS-RSRP, SS-RSRQ, and SS-SINR:

- In Test 1 and Test 2, the UE is configured with SS-RSRP as Event A3 measurement quantity.
- In Test 3 and Test 4, the UE is configured with SS-RSRQ as Event A3 measurement quantity.
- In Test 5 and Test 6, the UE is configured with SS-SINR as Event A3 measurement quantity.

Table A.13.3.1.4.2-1: Supported test configurations

Configuration	Description
1	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
3	Without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Table A.13.3.1.4.2-2: General test parameters for intra-frequency event triggered reporting without gap with DRX

Parameter	Unit	Test configuration	Value						Comment
			Test 1	Test 2	Test 3	Test 4	Test 5	Test 6	
Active PCell		1, 2, 3	Cell 1						
Active SCell		1, 2, 3	Cell 2						
Neighbour cell		1, 2, 3	Cell 3						Cell to be identified.
RF Channel Number		1, 2, 3	1: Cell 1 2: Cell 2 and Cell 3						
Measurement gap type		1, 2, 3	Per-UE gaps						
Measurement gap repitition periodicity	ms	1, 2, 3	40						
Measurement gap length	ms	1, 2, 3	[6]						
Measurement gap offset	ms	1, 2, 3	[39]						
DL CCA model			As specified in clause A.3.20.2.1						
UL CCA model			As specified in clause A.3.20.2.2						

SSB configuration		1	Cell 1: SSB.1 FR1 Cell 2,3: TBD	
		2	Cell 1: SSB.1 FR1 Cell 2,3: TBD	
		3	Cell 1: SSB.2 FR1 Cell 2,3: TBD	
SMTC configuration		1	Cell 1: SMTC.2 Cell 2,3: N/A	
		2	Cell 1: SMTC.1 Cell 2,3: N/A	
		3	Cell 1: SMTC.1 Cell 2,3: N/A	
DBT window configuration		1, 2, 3	Cell 1: N/A Cell 2,3: TBD	
CSI-RS parameters in Cell 1		1	CSI-RS.1.2 FDD resource #0	
		2	CSI-RS.1.2 TDD resource #0	
		3	CSI-RS.2.2 TDD resource #0	
A3-Offset	dB	1, 2, 3	-4.5	
Event A3 measurement quantity			SS-RSRP / SS-RSRQ / SS-SINR	
CP length		1, 2, 3	Normal	
Hysteresis	dB	1, 2, 3	0	
Time To Trigger	s	1, 2, 3	0	
Filter coefficient		1, 2, 3	0	L3 filtering is not used
DRX		1, 2, 3	DRX.1 / DRX.2 / DRX.1 / DRX.2 / DRX.1 / DRX.2	
Time offset between Cell 2 and Cell 3		1	3 ms	Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		2	3 µs	Synchronous cells
		3	3 µs	Synchronous cells
deriveSSB-IndexFromCell		1	*False*	
		2	*True*	
		3	*True*	
T1	s	1, 2, 3	TBD	
T2	s	1, 2, 3	TBD / TBD / TBD / TBD / TBD / TBD	

Table A.13.3.1.4.2-3: Cell-specific test parameters for intra-frequency event-triggered reporting without gap

Parameter	Unit	Test configuration	Cell 1		Cell 2		Cell 3	
			T1	T2	T1	T2	T1	T2
DL CCA probability P_{CCA_DL}		1, 2, 3	N/A		TBD	TBD	TBD	TBD
UL CCA probability P_{CCA_UL}		1, 2, 3	N/A		TBD	TBD	TBD	TBD
TDD configuration		1	N/A		TBD		TBD	
		2	TDDConf.1.1		TBD		TBD	
		3	TDDConf.2.1		TBD		TBD	
PDSCH RMC configuration		1	SR.1.1 FDD		TBD		TBD	
		2	SR.1.1 TDD					
		3	SR.2.1 TDD					
RMSI CORESET RMC configuration		1	CR.1.1 FDD		TBD		TBD	
		2	CR.1.1 TDD		TBD		TBD	

		3	CR.2.1 TDD		TBD		TBD	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		TBD		TBD	
		2	CCR.1.1 TDD		TBD		TBD	
		3	CCR.2.1 TDD		TBD		TBD	
OCNG Patterns		1, 2, 3	OP.1		TBD		TBD	
TRS Configuration		1	TRS.1.1 FDD		TBD		TBD	
		2	TRS.1.1 TDD		TBD		TBD	
		3	TRS.1.2 TDD		TBD		TBD	
IInitial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1		DLBWP.1.2		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1		DLBWP.1.2		ULBWP.1.1	
RLM-RS		1, 2, 3	SSB		SSB		SSB	
N_{oc} Note 2	dBm/SCS	1	-98		TBD		TBD	
		2	-98		TBD		TBD	
		3	-95		TBD		TBD	
N_{oc} Note 2	dBm/15 kHz	1	-98		TBD		TBD	
		2	-98		TBD		TBD	
		3	-95		TBD		TBD	
$\hat{E}_s/I_{ot}$ Note 5	dB	1	4	-1.46	TBD	TBD	-Infinity	TBD
		2			TBD	TBD	-Infinity	TBD
		3			TBD	TBD	-Infinity	TBD
$\hat{E}_s/N_{oc}$ Note 5	dB	1	4	4	TBD	TBD	-Infinity	TBD
		2			TBD	TBD	-Infinity	TBD
		3			TBD	TBD	-Infinity	TBD
SS-RSRP Note 3,5	dBm/SCS kHz	1	-94	-94	TBD	TBD	-Infinity	TBD
		2	-94	-94	TBD	TBD	-Infinity	TBD
		3	-91	-91	TBD	TBD	-Infinity	TBD
Io	dBm/9.36 MHz	1	-64.60	-62.25	TBD	TBD	TBD	TBD
	dBm/9.36 MHz	2	-64.60	-62.25	TBD	TBD	TBD	TBD
	dBm/38.16 MHz	3	-58.50	-56.16	TBD	TBD	TBD	TBD
Propagation Condition		1, 2, 3	AWGN					

NOTE 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: DL and UL CCA probabilities apply for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.
NOTE 5: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.

A.13.3.1.4.3 Test Requirements

The UE shall send one Event A3 triggered measurement report (SS-RSRP in Test 1 and Test 2, SS-RSRQ in Test 3 and Test 4, SS-SINR in Test 5 and Test 6), with a measurement reporting delay less than D1 ms from the beginning of time period T2.

Editor's note: D1=TBD (D1 is different for different DRX configurations).

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

FFS: NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.13.3.1.5 RSSI measurement reporting on SCC

A.13.3.1.5.1 Test purpose and environment

The purpose of this test is to verify that the UE correctly reports RSSI measurements. This test will partly verify the intra-frequency RSSI measurement reporting requirements in Section 9.2A.7.1.

A.13.3.1.5.2 Test parameters

In the test, the UE is configured to perform intra-frequency RSSI measurements on a carrier frequency under CCA.

Supported test configurations are shown in Table A.13.3.1.5.2-1. There are two cells in the test: Cell 1 is PCell on a licensed FR1 band, and Cell 2 is SCell operating on a carrier frequency under CCA. Prior to the start of the time duration T1, the UE is connected to Cell 1 and Cell 2.

Table A.13.3.1.5.2-1: Supported test configurations.

Configuration	Description
1	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
3	Without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Table A.13.3.1.5.2-2: General test parameters.

Parameter	Configurations	Unit	Test 1	
			Cell 1	Cell 2
RF Channel Number			1	2
$BW_{channel}$		MHz	40	40
DL CCA model			N/A	P_{CCA_DL}=1.0
UL CCA model			N/A	P_{CCA_UL}=1.0
Measurement bandwidth		n_{PRB}	Same as channel access bandwidth	
Channel access bandwidth		n_{PRB}	TBD	
PDSCH Reference measurement channel defined in TBD			TBD	TBD
PDCCH/PCFICH/PHICH Reference measurement channel defined in TBD			TBD	TBD
OCNG Patterns defined in TBD			TBD	TBD
Other general configuration parameters: TBD			TBD	TBD

N_{oc} in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	TBD	TBD
N_{oc} in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	TBD	TBD
$\hat{E}_s/I_{ot}$ in slots not corresponding to RSSI measurement time configuration (RMTC)		dB	TBD	TBD
$\hat{E}_s/I_{ot}$ in slots corresponding to RSSI measurement time configuration (RMTC)		dB	TBD	TBD
SS-RSRP in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	TBD	TBD
SS-RSRP in slots corresponding to RSSI measurement time configuration (RMTC)			TBD	TBD
Io within measurement bandwidth in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/BW	TBD	TBD
Io within measurement bandwidth in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/BW	TBD	TBD
Propagation condition		-	AWGN	

A.13.3.1.6 Channel occupancy measurement reporting on SCC

A.13.3.1.6.1 Test purpose and environment

The purpose of this test is to verify that the UE correctly reports channel occupancy measurements. This test will partly verify the intra-frequency channel occupancy measurement reporting requirements in Section 9.2A.7.2.

A.13.3.1.6.2 Test parameters

In the test, the UE is configured to perform intra-frequency channel occupancy measurements on a carrier frequency under CCA.

Supported test configurations are shown in Table A.13.3.1.6.2-1. There are two cells in the test: Cell 1 is PCell on a licensed FR1 band, and Cell 2 is SCell operating on a carrier frequency under CCA. Prior to the start of the time duration T1, the UE is connected to Cell 1 and Cell 2.

Table A.13.3.1.6.2-1: Supported test configurations.

Configuration	Description
1	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
3	Without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Table A.13.3.1.6.2-2: General test parameters.

Editor's note: Table is TBD

A.13.3.2 Inter-frequency measurements

A.13.3.2.1 RSSI measurement reporting

A.13.3.2.1.1 Test purpose and environment

The purpose of this test is to verify that the UE correctly reports RSSI measurements. This test will partly verify the inter-frequency RSSI measurement reporting requirements in Section 9.3A.8.

A.13.3.2.1.2 Test parameters

In the test, the UE is configured to perform inter-frequency RSSI measurements on a carrier frequency under CCA.

Supported test configurations are shown in Table A.13.3.2.1.2-1. There are two cells in the test: Cell 1 is PCell on a licensed FR1 band, and Cell 2 is SCell operating on a carrier frequency under CCA. Prior to the start of the time duration T1, the UE is connected to Cell 1 and Cell 2. The RSSI measurement is performed on an inter-frequency under CCA.

Table A.13.3.2.1.2-1: Supported test configurations.

Configuration	Description
1	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
3	Without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Table A.13.3.2.1.2-2: General test parameters.

Editor's note: Table TBD

A.13.3.2.2 Channel occupancy measurement reporting

A.13.3.2.2.1 Test purpose and environment

The purpose of this test is to verify that the UE correctly reports channel occupancy measurements. This test will partly verify the inter-frequency channel occupancy measurement reporting requirements in Section 9.3A.13.

A.13.3.2.2.2 Test parameters

In the test, the UE is configured to perform inter-frequency channel occupancy measurements on a carrier frequency under CCA.

Supported test configurations are shown in Table A.13.3.2.2.2-1. There are two cells in the test: Cell 1 is PCell on a licensed FR1 band, and Cell 2 is SCell operating on a carrier frequency under CCA. Prior to the start of the time duration T1, the UE is connected to Cell 1 and Cell 2. The channel occupancy measurement is performed on an inter-frequency under CCA.

Table A.13.3.2.2.2-1: Supported test configurations.

Configuration	Description
1	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
3	Without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Table A.13.3.2.2.2-2: General test parameters.

Editor's note: Table is TBD

A.13.3.2.3 Event triggered reporting tests for FR1 with CCA without SSB time index detection when DRX is not used

A.13.3.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements for NR cell with CCA in clause 9.3A.4 and 9.3A.5.

In this test, there are three cells: NR cell 1 as PCell in FR1 on NR RF channel 1, NR cell 2 as SCell in FR1 with CCA on NR RF channel 2 and NR cell 3 as neighbour cell in FR1 with CCA on NR RF channel 3. The test parameters are given in Tables A.13.3.2.3.1-1, A.13.3.2.3.1-2 and A.13.3.2.3.1-3.

In test 1, measurement gap pattern configuration # 0 as defined in Table A.13.3.2.3.1-2 is provided for UE that does not support per-FR gap. In test 2, measurement gap pattern configuration #4 as defined in Table A.13.3.2.3.1-2 is provided for UE that supports per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 2. Otherwise it is only required to pass test 1.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

Table A.13.3.2.3.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR1 with CCA

Config	Description
1	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, NR cell without CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.13.3.2.3.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 with CCA without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	

NR RF Channel Number		Config 1,2,3	1, 2, 3		Three FR1 NR carrier frequencies are used. Channels 2 and 3 are with CCA.
Active cells		Config 1,2,3	NR cell 1 (PCell), NR cell 2 with CCA (SCell)		NR cell 1 is on NR RF channel number 1. NR cell 2 is on NR RF channel number 2 with CCA.
Neighbour cell		Config 1,2,3	NR cell 3 with CCA		NR cell 3 is on NR RF channel number 3 with CCA.
DL CCA model		Config 1,2,3	As specified in clause A.3.26.2.1		
UL CCA model		Config 1,2,3	As specified in clause A.3.26.2.2		
Gap Pattern Id		Config 1,2,3	0	4	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	9	9	
A3-Offset	dB	Config 1,2,3	-6		
Hysteresis	dB	Config 1,2,3	0		
CP length		Config 1,2,3	Normal		
TimeToTrigger	s	Config 1,2,3	0		
Filter coefficient		Config 1,2,3	0		L3 filtering is not used
DRX		Config 1,2,3	OFF		DRX is not used
Time offset between serving and neighbour cells		Config 1,2,3	3µs		Synchronous cells.
T1	s	Config 1,2,3	5		
T2	s	Config 1,2,3	1.7	1.7	

Table A.13.3.2.3.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 with CCA without SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2		Cell 3	
				T1	T2	T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2		3	
Duplex mode			Config 1	FDD		TDD		TDD	
			Config 2,3	TDD		TDD		TDD	
TDD configuration			Config 1	Not Applicable		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
			Config 2	TDDConf.1.1		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
			Config 3	TDDConf.2.1		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1,2,3	Not Applicable		P_{CCA_DL}=0.9375		P_{CCA_DL}=0.9375	
	Dynamic channel access Note 6,7		Config 1,2,3	Not Applicable		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	
UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1,2,3	Not Applicable		P_{CCA_UL}=1		P_{CCA_UL}=1	
	Dynamic channel access Note 6,7		Config 1,2,3	Not Applicable		P_{CCA_UL}=1		P_{CCA_UL}=1	

L_{CCA_DL}			Config 1,2,3	Not Applicable	12	12
W_{CCA_DL}		ms	Config 1,2,3	Not Applicable	$T_{PSS/SSS_sync_inter_cca}$	$T_{PSS/SSS_sync_inter_cca}$
$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c}$ = 52	40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
			Config 3	40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
BWP BW		MHz	Config 1,2	10: $N_{RB,c}$ = 52	40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
			Config 3	40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1	DLBWP.0.1	
	Initial UL BWP			ULBWP.0.1	ULBWP.0.1	
	Dedicated DL BWP			DLBWP.1.1	DLBWP.1.1	
	Dedicated UL BWP			ULBWP.1.1	ULBWP.1.1	
TRS configuration			Config 1	TRS.1.1 FDD	TRS.1.2 TDD	
			Config 2	TRS.1.1 TDD	TRS.1.2 TDD	
			Config 3	TRS.1.2 TDD	TRS.1.2 TDD	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1	OP.1	OP.1
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD	SR.1.1 CCA	
			Config 2	SR.1.1 TDD	SR.1.1 CCA	
			Config 3	SR2.1 TDD	SR.1.1 CCA	
CORESET Reference Channel			Config 1	CR.1.1 FDD	CR.1.1 CCA	
			Config 2	CR.1.1 TDD	CR.1.1 CCA	
			Config 3	CR2.1 TDD	CR.1.1 CCA	
SSB parameters	Semi-static channel Note 5,7		Config 1	SSB.1 FR1	SSB.1 CCA	SSB.1 CCA
			Config 2	SSB.1 FR1	SSB.1 CCA	SSB.1 CCA
			Config 3	SSB.2 FR1	SSB.1 CCA	SSB.1 CCA
	Dynamic channel Access Note 6,7		Config 1	SSB.1 FR1	SSB.2 CCA	SSB.2 CCA
			Config 2	SSB.1 FR1	SSB.2 CCA	SSB.2 CCA
			Config 3	SSB.2 FR1	SSB.2 CCA	SSB.2 CCA
DBT window configuration			Config 1,2,3	Not Applicable	As defined in A.3.28.1	As defined in A.3.28.1
SMTC configuration defined in A.3.11			Config 1,2,3	SMTC.1	SMTC.1	SMTC.4
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	15	30	30
			Config 2	15	30	30
			Config 3	30	30	30
EPRE ratio of PSS to SSS			Config 1,2,3	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						

EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2	dBm/ 15kHz	Config 1,2,3	-98		-104		-104		
N_{oc} Note2	dBm/ SCS	Config 1,2	-98		-101		-101		
		Config 3	-95		-101		-101		
SS-RSRP Note 3	dBm/ SCS	Config 1,2	-94	-94	-91	-91	-Infinity	-88	
		Config 3	-91	-91	-91	-91	-Infinity	-88	
$\hat{E}_s/I_{ot}$	dB	Config 1,2	4	4	4	4	-Infinity	7	
$\hat{E}_s/N_{oc}$	dB	Config 1,2	4	4	4	4	-Infinity	7	
Io Note3	dBm/ 9.36 MHz	Config 1,2	-64.59	-64.59	-58.49	-58.49	-63.94	-56.15	
	dBm/ 38.16 MHz	Config 3	-58.49	-58.49	-58.49	-58.49	-63.94	-56.15	
Propagation Condition		Config 1,2,3	AWGN		AWGN		AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.

Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.

A.13.3.2.3.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_without_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.In test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_without_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2 UE is not required to report SSB time index.

$T_{identify_inter_cca_without_index} = (T_{PSS/SSS_sync_inter_cca} + T_{SSB_measurement_period_inter_cca})$ ms, where

$T_{PSS/SSS_sync_inter_cca}$: it is the time period used in PSS/SSS detection given in table 9.3A.4-1.

$T_{SSB_measurement_period_inter_cca}$: equal to a measurement period of SSB based measurement given in table 9.3A.5-1.

For test 1, MGRP = 40 ms and for test 2 MGRP = 20 ms.

SMTC period = 20 ms.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.13.3.2.4 Event triggered reporting tests for FR1 with CCA without SSB time index detection when DRX is used

A.13.3.2.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3A.4 and 9.3A.5.

In this test, there are three cells: NR cell 1 as PCell in FR1 on NR RF channel 1, NR cell 2 as SCell in FR1 with CCA on NR RF channel 2 and NR cell 3 as neighbour cell in FR1 with CCA on NR RF channel 3. The test parameters are given in Tables A.13.3.2.4.1-1, A.13.3.2.4.1-2 and A.13.3.2.4.1-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table A.13.3.2.4.1-2 is provided for UE that does not support per-FR gap and in test 3&4 measurement gap pattern configuration #4 as defined in Table A.13.3.2.4.1-2 is provided for UE that supports per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 3&4. Otherwise it is only required to pass test 1&2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.13.3.2.4.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR1 with CCA

Config	Description
1	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, NR cell without CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.13.3.2.4.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 with CCA without SSB time index detection

Parameter	Unit	Test configuration	Value				Comment
			Test 1	Test 2	Test 3	Test 4	

NR RF Channel Number		Config 1,2,3	1, 2, 3				Three FR1 NR carrier frequencies are used. Channels 2 and 3 are with CCA.
Active cells		Config 1,2,3	NR cell 1 (PCell), NR cell 2 with CCA (SCell)				NR cell 1 is on NR RF channel number 1. NR cell 2 is on NR RF channel number 2 with CCA.
Neighbour cell		Config 1,2,3	NR cell 3 with CCA				NR cell 3 is on NR RF channel number 3 with CCA.
DL CCA model		Config 1,2,3	As specified in clause A.3.26.2.1				
UL CCA model		Config 1,2,3	As specified in clause A.3.26.2.2				
Gap Pattern Id		Config 1,2,3	0		4		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	9		9		
A3-Offset	dB	Config 1,2,3	-6				
Hysteresis	dB	Config 1,2,3	0				
CP length		Config 1,2,3	Normal				
TimeToTrigger	s	Config 1,2,3	0				
Filter coefficient		Config 1,2,3	0				L3 filtering is not used
DRX		Config 1,2,3	DRX .1	DRX .2	DRX .1	DRX .2	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1,2,3	3µs				Synchronous cells.
T1	s	Config 1,2,3	5				
T2	s	Config 1,2,3	2.5	17	2.5	17	

Table A.13.3.2.4.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 with CCA without SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2		Cell 3	
				T1	T2	T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2		3	
Duplex mode			Config 1	FDD		TDD		TDD	
			Config 2,3	TDD		TDD		TDD	
TDD configuration			Config 1	Not Applicable		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
			Config 2	TDDConf.1.1		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
			Config 3	TDDConf.2.1		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1,2,3	Not Applicable		P_{CCA_DL}=0.9375		P_{CCA_DL}=0.9375	
	Dynamic channel access Note 6,7		Config 1,2,3	Not Applicable		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	
UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1,2,3	Not Applicable		P_{CCA_UL}=1		P_{CCA_UL}=1	

	Dynamic channel access Note 6,7		Config 1,2,3	Not Applicable	P_{CCA_UL}=1	P_{CCA_UL}=1
L_{CCA_DL}			Config 1,2,3	Not Applicable	5	5
W_{CCA_DL}		ms	Config 1,2,3	Not Applicable	$T_{PSS/SSS_sync_inter_cca}$	$T_{PSS/SSS_sync_inter_cca}$
$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c}$ = 52	40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
			Config 3	40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
BWP BW		MHz	Config 1,2	10: $N_{RB,c}$ = 52	40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
			Config 3	40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1	DLBWP.0.1	
	Initial UL BWP			ULBWP.0.1	ULBWP.0.1	
	Dedicated DL BWP			DLBWP.1.1	DLBWP.1.1	
	Dedicated UL BWP			ULBWP.1.1	ULBWP.1.1	
TRS configuration			Config 1	TRS.1.1 FDD	TRS.1.2 TDD	
			Config 2	TRS.1.1 TDD	TRS.1.2 TDD	
			Config 3	TRS.1.2 TDD	TRS.1.2 TDD	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1	OP.1	OP.1
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD	SR.1.1 CCA	
			Config 2	SR.1.1 TDD	SR.1.1 CCA	
			Config 3	SR2.1 TDD	SR.1.1 CCA	
CORESET Reference Channel			Config 1	CR.1.1 FDD	CR.1.1 CCA	
			Config 2	CR.1.1 TDD	CR.1.1 CCA	
			Config 3	CR2.1 TDD	CR.1.1 CCA	
SSB parameters	Semi-static channel Note 5,7		Config 1	SSB.1 FR1	SSB.1 CCA	SSB.1 CCA
			Config 2	SSB.1 FR1	SSB.1 CCA	SSB.1 CCA
			Config 3	SSB.2 FR1	SSB.1 CCA	SSB.1 CCA
	Dynamic channel Access Note 6,7		Config 1	SSB.1 FR1	SSB.2 CCA	SSB.2 CCA
			Config 2	SSB.1 FR1	SSB.2 CCA	SSB.2 CCA
			Config 3	SSB.2 FR1	SSB.2 CCA	SSB.2 CCA
DBT window configuration			Config 1,2,3	Not Applicable	As defined in A.3.28.1	As defined in A.3.28.1
SMTC configuration defined in A.3.11			Config 1,2,3	SMTC.1	SMTC.1	SMTC.4
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	15	30	30
			Config 2	15	30	30
			Config 3	30	30	30
EPRE ratio of PSS to SSS			Config 1,2,3	0	0	0
EPRE ratio of PBCH DMRS to SSS						

EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} Note2	dBm/ 15kHz	Config 1,2,3	-98		-104		-104	
N_{oc} Note2	dBm/ SCS	Config 1,2	-98		-101		-101	
		Config 3	-95		-101		-101	
SS-RSRP Note 3	dBm/ SCS	Config 1,2	-94	-94	-91	-91	-Infinity	-88
		Config 3	-91	-91	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2	4	4	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2	4	4	4	4	-Infinity	7
Io Note3	dBm/ 9.36 MHz	Config 1,2	-64.59	-64.59	-58.49	-58.49	-63.94	-56.15
	dBm/ 38.16 MHz	Config 3	-58.49	-58.49	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3	AWGN		AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.

Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.

Table A.13.3.2.4.1-4: DRX-Configuration for SA inter-frequency event triggered reporting without SSB time index detection

Field	Test1&3	Test2&4	Comment
	Value	Value	
drx-onDurationTimer	ms1	ms1	As specified in clause 6.3.2 in TS 38.331 [2]
drx-InactivityTimer	ms1	ms1	
drx-RetransmissionTimerDL	sl1	sl1	

drx-RetransmissionTimerUL	sl1	sl1	
drx-LongCycleStartOffset	ms40	Ms640	
shortDRX	disable	disable	

Table A.13.3.2.4.1-5: *TimeAlignmentTimer* -Configuration SA inter-frequency event triggered reporting without SSB time index detection

Field	Value	Comment
TimeAlignmentTimer	ms500	As specified in clause 6.3.2 in TS 38.331 [2]

A.13.3.2.4.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_without_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_without_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 3 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_without_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 4 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_without_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1, 2, 3 and 4 UE is not required to report SSB time index.

$T_{identify_inter_cca_without_index} = (T_{PSS/SSS_sync_inter_cca} + T_{SSB_measurement_period_inter_cca})$ ms, where

$T_{PSS/SSS_sync_inter_cca}$: it is the time period used in PSS/SSS detection given in table 9.3A.4-1.

$T_{SSB_measurement_period_inter_cca}$: equal to a measurement period of SSB based measurement given in table 9.3A.5-1.

For tests 1 and 2, MGRP = 40 ms and for tests 3 and 4 MGRP = 20 ms.

For tests 1 and 3, DRX cycle = 40 ms and for tests 2 and 4 DRX cycle = 640 ms.

SMTC period = 20 ms.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.13.3.2.5 Event triggered reporting tests for FR1 with CCA with SSB time index detection when DRX is not used

A.13.3.2.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3A.4 and 9.3A.5.

In this test, there are three cells: NR cell 1 as PCell in FR1 on NR RF channel 1, NR cell 2 as SCell in FR1 with CCA on NR RF channel 2 and NR cell 3 as neighbour cell in FR1 with CCA on NR RF channel 3. The test parameters are given in Tables A.13.3.2.5.1-1, A.13.3.2.5.1-2 and A.13.3.2.5.1-3.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.13.3.2.5.1-2 is provided for UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #4 as defined in Table A.13.3.2.5.1-2 is provided for UE that supports per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 2. Otherwise it is only required to pass test 1.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

Table A.13.3.2.5.1-1: SA event triggered reporting tests with SSB index reading for FR1-FR1 with CCA

Config	Description
1	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, NR cell without CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.13.3.2.5.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 with CCA with SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1,2,3	1, 2, 3		Three FR1 NR carrier frequencies are used. Channels 2 and 3 are with CCA.
Active cells		Config 1,2,3	NR cell 1 (PCell), NR cell 2 with CCA (SCell)		NR cell 1 is on NR RF channel number 1. NR cell 2 is on NR RF channel number 2 with CCA.
Neighbour cell		Config 1,2,3	NR cell 3 with CCA		NR cell 3 is on NR RF channel number 3 with CCA.
DL CCA model		Config 1,2,3	As specified in clause A.3.26.2.1		
UL CCA model		Config 1,2,3	As specified in clause A.3.26.2.2		
Gap Pattern Id		Config 1,2,3	0	4	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	9	9	
A3-Offset	dB	Config 1,2,3	-6		
Hysteresis	dB	Config 1,2,3	0		

CP length		Config 1,2,3	Normal	
TimeToTrigger	s	Config 1,2,3	0	
Filter coefficient		Config 1,2,3	0	L3 filtering is not used
DRX		Config 1,2,3	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1,2,3	3μs	Synchronous cells.
T1	s	Config 1,2,3	5	
T2	s	Config 1,2,3	2 2	

Table A.13.3.2.5.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 with CCA with SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2		Cell 3	
				T1	T2	T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2		3	
Duplex mode			Config 1	FDD		TDD		TDD	
			Config 2,3	TDD		TDD		TDD	
TDD configuration			Config 1	Not Applicable		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
			Config 2	TDDConf.1.1		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
			Config 3	TDDConf.2.1		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1,2,3	Not Applicable		P_{CCA_DL}=0.9375		P_{CCA_DL}=0.9375	
	Dynamic channel access Note 6,7		Config 1,2,3	Not Applicable		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	
UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1,2,3	Not Applicable		P_{CCA_UL}=1		P_{CCA_UL}=1	
	Dynamic channel access Note 6,7		Config 1,2,3	Not Applicable		P_{CCA_UL}=1		P_{CCA_UL}=1	
L_{CCA_DL}			Config 1,2,3	Not Applicable		5		5	
W_{CCA_DL}		ms	Config 1,2,3	Not Applicable		$T_{PSS/SSS_sync_inter_cca}$		$T_{PSS/SSS_sync_inter_cca}$	
$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c}$ = 52		40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
			Config 3	40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
BWP BW		MHz	Config 1,2	10: $N_{RB,c}$ = 52		40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
			Config 3	40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1		DLBWP.0.1			
	Initial UL BWP			ULBWP.0.1		ULBWP.0.1			
	Dedicated DL BWP			DLBWP.1.1		DLBWP.1.1			
	Dedicated UL BWP			ULBWP.1.1		ULBWP.1.1			
TRS configuration			Config 1	TRS.1.1 FDD		TRS.1.2 TDD			

			Config 2	TRS.1.1 TDD	TRS.1.2 TDD	
			Config 3	TRS.1.2 TDD	TRS.1.2 TDD	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1	OP.1	OP.1
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD	SR.1.1 CCA	
			Config 2	SR.1.1 TDD	SR.1.1 CCA	
			Config 3	SR2.1 TDD	SR.1.1 CCA	
CORESET Reference Channel			Config 1	CR.1.1 FDD	CR.1.1 CCA	
			Config 2	CR.1.1 TDD	CR.1.1 CCA	
			Config 3	CR2.1 TDD	CR.1.1 CCA	
SSB paramet ers	Semi-static channel Note 5,7		Config 1	SSB.1 FR1	SSB.1 CCA	SSB.1 CCA
			Config 2	SSB.1 FR1	SSB.1 CCA	SSB.1 CCA
			Config 3	SSB.2 FR1	SSB.1 CCA	SSB.1 CCA
	Dynamic channel Access Note 6,7		Config 1	SSB.1 FR1	SSB.2 CCA	SSB.2 CCA
			Config 2	SSB.1 FR1	SSB.2 CCA	SSB.2 CCA
			Config 3	SSB.2 FR1	SSB.2 CCA	SSB.2 CCA
DBT window configuration			Config 1,2,3	Not Applicable	As defined in A.3.28.1	As defined in A.3.28.1
SMTC configuration defined in A.3.11			Config 1,2,3	SMTC.1	SMTC.1	SMTC.4
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	15	30	30
			Config 2	15	30	30
			Config 3	30	30	30
EPRE ratio of PSS to SSS			Config 1,2,3	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/ 15kH z	Config 1,2,3	-98	-104	-104
			Config 1,2	-98	-101	-101

N_{oc} Note2	dBm/ SCS	Config 3	-95		-101		-101	
SS-RSRP Note 3	dBm/ SCS	Config 1,2	-94	-94	-91	-91	-Infinity	-88
		Config 3	-91	-91	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2	4	4	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2	4	4	4	4	-Infinity	7
Io Note3	dBm/ 9.36 MHz	Config 1,2	-64.59	-64.59	-58.49	-58.49	-63.94	-56.15
	dBm/ 38.16 MHz	Config 3	-58.49	-58.49	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3	AWGN		AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration

A.13.3.2.5.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_with_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_with_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2 UE is required to report SSB time index.

$T_{identify_inter_cca_with_index} = (T_{PSS/SSS_sync_inter_cca} + T_{SSB_measurement_period_inter_cca} + T_{SSB_time_index_inter_cca})$ ms, where

$T_{PSS/SSS_sync_inter_cca}$: it is the time period used in PSS/SSS detection given in table 9.3A.4-1.

$T_{SSB_time_index_inter_cca}$: it is the time period used to acquire the index of the SSB being measured given in table 9.3A.4-2.

$T_{SSB_measurement_period_inter_cca}$: equal to a measurement period of SSB based measurement given in table 9.3A.5-1.

For test 1, MGRP = 40 ms and for test 2 MGRP = 20 ms.

SMTC period = 20 ms.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.13.3.2.6 Event triggered reporting tests for FR1 with CCA with SSB time index detection when DRX is used

A.13.3.2.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3A.4 and 9.3A.5.

In this test, there are three cells: NR cell 1 as PCell in FR1 on NR RF channel 1, NR cell 2 as SCell in FR1 with CCA on NR RF channel 2 and NR cell 3 as neighbour cell in FR1 with CCA on NR RF channel 3. The test parameters are given in Tables A.13.3.2.6.1-1, A.13.3.2.6.1-2 and A.13.3.2.6.1-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table A.13.3.2.6.1-2 is provided for UE that does not support per-FR gap and in test 3&4 measurement gap pattern configuration #4 as defined in Table A.13.3.2.6.1-2 is provided for UE that supports per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 3&4. Otherwise it is only required to pass test 1&2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

UE needs to be provided at least once every 500 ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.13.3.2.6.1-1: SA event triggered reporting tests with SSB index reading for FR1-FR1 with CCA

Config	Description
1	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, NR cell without CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.13.3.2.6.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 with CCA with SSB time index detection

Parameter	Unit	Test configuration	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
NR RF Channel Number		Config 1,2,3	1, 2, 3				Three FR1 NR carrier frequencies are used. Channels 2 and 3 are with CCA.
Active cells		Config 1,2,3	NR cell 1 (PCell), NR cell 2 with CCA (SCell)				NR cell 1 is on NR RF channel number 1. NR cell 2 is on NR RF channel number 2 with CCA.
Neighbour cell		Config 1,2,3	NR cell 3 with CCA				NR cell 3 is on NR RF channel number 3 with CCA.
DL CCA model		Config 1,2,3	As specified in clause A.3.26.2.1				
UL CCA model		Config 1,2,3	As specified in clause A.3.26.2.2				
Gap Pattern Id		Config 1,2,3	0		4		As specified in clause 9.1.2-1.

Measurement gap offset		Config 1,2,3	9		9		
A3-Offset	dB	Config 1,2,3	-6				
Hysteresis	dB	Config 1,2,3	0				
CP length		Config 1,2,3	Normal				
TimeToTrigger	s	Config 1,2,3	0				
Filter coefficient		Config 1,2,3	0				L3 filtering is not used
DRX		Config 1,2,3	DRX .1	DRX .2	DRX .1	DRX .2	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1,2,3	3μs				Synchronous cells.
T1	s	Config 1,2,3	5				
T2	s	Config 1,2,3	3	20	3	20	

Table A.13.3.2.6.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 with CCA with SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2		Cell 3	
				T1	T2	T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2		3	
Duplex mode			Config 1	FDD		TDD		TDD	
			Config 2,3	TDD		TDD		TDD	
TDD configuration			Config 1	Not Applicable		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
			Config 2	TDDConf.1.1		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
			Config 3	TDDConf.2.1		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1,2,3	Not Applicable		P_{CCA_DL}=0.9375		P_{CCA_DL}=0.9375	
	Dynamic channel access Note 6,7		Config 1,2,3	Not Applicable		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	
UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1,2,3	Not Applicable		P_{CCA_UL}=1		P_{CCA_UL}=1	
	Dynamic channel access Note 6,7		Config 1,2,3	Not Applicable		P_{CCA_UL}=1		P_{CCA_UL}=1	
L_{CCA_DL}			Config 1,2,3	Not Applicable		2		2	
W_{CCA_DL}		ms	Config 1,2,3	Not Applicable		$T_{PSS/SSS_sync_inter_cca}$		$T_{PSS/SSS_sync_inter_cca}$	
$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c}$ = 52		40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
			Config 3	40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
BWP BW		MHz	Config 1,2	10: $N_{RB,c}$ = 52		40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
			Config 3	40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1		DLBWP.0.1			
	Initial UL BWP			ULBWP.0.1		ULBWP.0.1			
	Dedicated DL BWP			DLBWP.1.1		DLBWP.1.1			

	Dedicated UL BWP			ULBWP.1.1	ULBWP.1.1	
TRS configuration			Config 1	TRS.1.1 FDD	TRS.1.2 TDD	
			Config 2	TRS.1.1 TDD	TRS.1.2 TDD	
			Config 3	TRS.1.2 TDD	TRS.1.2 TDD	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1	OP.1	OP.1
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD	SR.1.1 CCA	
			Config 2	SR.1.1 TDD	SR.1.1 CCA	
			Config 3	SR2.1 TDD	SR.1.1 CCA	
CORESET Reference Channel			Config 1	CR.1.1 FDD	CR.1.1 CCA	
			Config 2	CR.1.1 TDD	CR.1.1 CCA	
			Config 3	CR2.1 TDD	CR.1.1 CCA	
SSB parameters	Semi-static channel Note 5,7		Config 1	SSB.1 FR1	SSB.1 CCA	SSB.1 CCA
			Config 2	SSB.1 FR1	SSB.1 CCA	SSB.1 CCA
			Config 3	SSB.2 FR1	SSB.1 CCA	SSB.1 CCA
	Dynamic channel Access Note 6,7		Config 1	SSB.1 FR1	SSB.2 CCA	SSB.2 CCA
			Config 2	SSB.1 FR1	SSB.2 CCA	SSB.2 CCA
			Config 3	SSB.2 FR1	SSB.2 CCA	SSB.2 CCA
DBT window configuration			Config 1,2,3	Not Applicable	As defined in A.3.28.1	As defined in A.3.28.1
SMTC configuration defined in A.3.11			Config 1,2,3	SMTC.1	SMTC.1	SMTC.4
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	15	30	30
			Config 2	15	30	30
			Config 3	30	30	30
EPRE ratio of PSS to SSS			Config 1,2,3	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						

EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} Note2	dBm/ 15kHz	Config 1,2,3	-98		-104		-104	
N_{oc} Note2	dBm/ SCS	Config 1,2	-98		-101		-101	
		Config 3	-95		-101		-101	
SS-RSRP Note 3	dBm/ SCS	Config 1,2	-94	-94	-91	-91	-Infinity	-88
		Config 3	-91	-91	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2	4	4	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2	4	4	4	4	-Infinity	7
Io Note3	dBm/ 9.36 MHz	Config 1,2	-64.59	-64.59	-58.49	-58.49	-63.94	-56.15
	dBm/ 38.16 MHz	Config 3	-58.49	-58.49	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3	AWGN		AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.

Table A.13.3.2.6.1-4: DRX-Configuration for SA inter-frequency event triggered reporting without SSB time index detection

Field	Test1&3	Test2&4	Comment
	Value	Value	
drx-onDurationTimer	ms1	ms1	As specified in clause 6.3.2 in TS 38.331 [2]
drx-InactivityTimer	ms1	ms1	
drx-RetransmissionTimerDL	sl1	sl1	
drx-RetransmissionTimerUL	sl1	sl1	
drx-LongCycleStartOffset	ms40	Ms640	
shortDRX	disable	disable	

Table A.13.3.2.6.1-5: *TimeAlignmentTimer* -Configuration SA inter-frequency event triggered reporting without SSB time index detection

Field	Value	Comment
TimeAlignmentTimer	ms500	As specified in clause 6.3.2 in TS 38.331 [2]

A.13.3.2.6.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_with_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.In test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_with_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 3 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_with_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 4 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_with_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1, 2, 3 and 4 UE is required to report SSB time index.

$T_{identify_inter_cca_with_index} = (T_{PSS/SSS_sync_inter_cca} + T_{SSB_measurement_period_inter_cca} + T_{SSB_time_index_inter_cca})$ ms, where

$T_{PSS/SSS_sync_inter_cca}$: it is the time period used in PSS/SSS detection given in table 9.3A.4-1.

$T_{SSB_time_index_inter_cca}$: it is the time period used to acquire the index of the SSB being measured given in table 9.3A.4-2.

$T_{SSB_measurement_period_inter_cca}$: equal to a measurement period of SSB based measurement given in table 9.3A.5-1.

For tests 1 and 2, MGRP = 40 ms and for tests 3 and 4 MGRP = 20 ms.

For tests 1 and 3, DRX cycle = 40 ms and for tests 2 and 4 DRX cycle = 640 ms.

SMTC period = 20 ms.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.13.3.3 L1-RSRP measurements for beam reporting

A.13.3.3.1 SSB based L1-RSRP measurement when DRX is not used

A.13.3.3.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5A.4.1, with the testing configurations for NR cells in Table A.13.3.3.1.1-1.

Table A.13.3.3.1.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
1	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

2	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
3	Without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.13.3.3.1.2 Test parameters

There are two cells in the tests, FR1 PCell (Cell 1) and FR1 SCell (Cell 2). Cell 2 operates on a carrier frequency with CCA and transmits SSBs in DBT window according to DL CCA model. The test parameters and applicability for Cell 1 and Cell 2 are given in Table A.13.3.3.1.2-1 and Table A.13.3.3.1.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The UE transmits the reporting according to UL CCA model. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.13.3.3.1.2-1: General test parameters

Parameter	Config	Unit	Value	
			Cell 1	Cell 2
Active PCell/SCell Configuration			PCell	SCell
RF Channel Number			1	2
DL CCA model	1~3		N/A	As specifieed in A.3.20.2.1
UL CCA model	1~3		N/A	As specified in A.3.20.2.2
Duplex mode	1		FDD	TDD
	2		TDD	
	3		TDD	
TDD Configuration	1		N/A	TDDConf.1.1 CCA
	2		TDDConf.1.1	
	3		TDDConf.2.1	
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52	40: $N_{RB,c}$ = 106
	2		10: $N_{RB,c}$ = 52	
	3		40: $N_{RB,c}$ = 106	
PDSCH Reference measurement channel	1		SR.1.1 FDD	SR.1.1 CCA
	2		SR.1.1 TDD	
	3		SR.2.1 TDD	
RMSI CORESET Reference Channel	1		CR.1.1 FDD	CR.1.1 CCA
	2		CR.1.1 TDD	
	3		CR.2.1 TDD	
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD	CCR.1.1 CCA
	2		CCR.1.1 TDD	
	3		CCR.2.1 TDD	
SSB configuration	1		SSB.3 FR1	SSB.3 CCA for semi-static channel access

	2		SSB.3 FR1	SSB.4 CCA for dynamic channel access
	3		SSB.4 FR1	
OCNG Patterns	1~3		OP.1	OP.1
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~3		SMTC.1	N/A
DBT Window Configuration	1~3		N/A	DBT.1
TRS Configuration	1		TRS.1.1 FDD	TRS.1.2 TDD
	2		TRS.1.1 TDD	
	3		TRS.1.2 TDD	
DRX configuration	1~3		Off	Off
reportConfigType	1~3		periodic	periodic
reportQuantity	1~3		ssb-Index-RSRP	ssb-Index-RSRP
Number of reported RS	1~3		2	2
L1-RSRP reporting period	1~3	slot	80	80
T1	1~3	s	5	5
T2	1~3	s	1	1
EPRE ratio of PSS to SSS	1~3	dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
Propagation condition	1~3		AWGN	AWGN
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.				

Table A.13.3.3.1.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
DL CCA Probability P_{CCA_DL} Note 4,6	1,2,3		[0.9375]	[0.9375]	[0.9375]	[0.9375]
DL CCA Probability P_{CCA_DL} Note 4.7	1,2,3		[0.75]/[0.75]	[0.75]/[0.75]	[0.75]/[0.75]	[0.75]/[0.75]
UL CCA probability P_{CCA_UL}	1,2,3		[1.0]	[1.0]	[1.0]	[1.0]
N_{oc} Note2	1,2,3	dBm/15kHz	-94.65			
N_{oc} Note2	1,2,3	dBm/SSB SCS	-91.65			

$\hat{E}_s/I_{ot}$	1,2,3	dB	0	0	-Infinity	3
SSB RSRP Note3	1,2,3	dBm/SSB SCS	-91.65	-91.65	-Infinity	-88.65
Io Note3	1,2,3	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.84
$\hat{E}_s/N_{oc}$	1,2,3	dB	0	0	-Infinity	3

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: DL and UL CCA probabilities apply for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.
Note 5: The signal levels apply for SSS Res when the discovery burst is transmitted during DBT windows.
Note 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2}.

A.13.3.3.1.3 Test Requirements

The UE shall send L1-RSRP report every 80 slots. No later than 640 ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute accuracy requirement in clause 10.1.19.1.1 and relative accuracy requirement in clause 10.1.19.1.2. The rate of correct events observed during repeated tests shall be at least 90%.

The UE shall send L1-RSRP report of both SSB0 and SSB1 in Cell 2.

NOTE: The actual overall delays measured in the test may be up to 2xTTI DCCH higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.13.3.3.2 SSB based L1-RSRP measurement when DRX is used

A.13.3.3.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5A.4.1, with the testing configurations for NR cells in Table A.13.3.3.1.1-1.

Table A.13.3.3.2.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
1	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
3	Without CCA 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.13.3.3.2.2 Test parameters

There are two cells in the tests, FR1 Pcell (Cell 1) and FR1 Scell (Cell 2). Cell 2 operates on a carrier frequency with CCA and transmits SSBs in DBT window according to DL CCA model. The test parameters and applicability for Cell 1 and Cell 2 are given in Table A.13.3.3.2.2-1 and Table A.13.3.3.2.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The UE transmits the reporting according to UL CCA model. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.13.3.3.2.2-1: General test parameters

Parameter	Config	Unit	Value	
			Cell 1	Cell 2
Active Pcell/Scell Configuration			Pcell	Scell
RF Channel Number			1	2
DL CCA model	1~3		N/A	As specifieed in A.3.20.2.1
UL CCA model	1~3		N/A	As specified in A.3.20.2.2
Duplex mode	1		FDD	TDD
	2		TDD	
	3		TDD	
TDD Configuration	1		N/A	TDDConf.1.1 CCA
	2		TDDConf.1.1	
	3		TDDConf.2.1	
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52	40: $N_{RB,c}$ = 106
	2		10: $N_{RB,c}$ = 52	
	3		40: $N_{RB,c}$ = 106	
PDSCH Reference measurement channel	1		SR.1.1 FDD	SR.1.1 CCA
	2		SR.1.1 TDD	
	3		SR.2.1 TDD	
RMSI CORESET Reference Channel	1		CR.1.1 FDD	CR.1.1 CCA
	2		CR.1.1 TDD	
	3		CR.2.1 TDD	
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD	CCR.1.1 CCA
	2		CCR.1.1 TDD	
	3		CCR.2.1 TDD	
SSB configuration	1		SSB.3 FR1	SSB.3 CCA for semi-static channel access SSB.4 CCA for dynamic channel access
	2		SSB.3 FR1	
	3		SSB.4 FR1	
OCNG Patterns	1~3		OP.1	OP.1
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1

SMTC configuration	1~3		SMTC.1	N/A
DBT Window Configuration	1~3		N/A	DBT.1
TRS Configuration	1		TRS.1.1 FDD	TRS.1.2 TDD
	2		TRS.1.1 TDD	
	3		TRS.1.2 TDD	
DRX configuration	1~3		DRX.3	DRX.3
reportConfigType	1~3		periodic	periodic
reportQuantity	1~3		ssb-Index-RSRP	ssb-Index-RSRP
Number of reported RS	1~3		2	2
L1-RSRP reporting period	1~3	slot	80	80
T1	1~3	s	5	5
T2	1~3	s	1	1
EPRE ratio of PSS to SSS	1~3	dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
Propagation condition	1~3		AWGN	AWGN
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.				

Table A.13.3.3.2.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
DL CCA Probability P_{CCA_DL} Note 4,6	1,2,3		[0.9375]	[0.9375]	[0.9375]	[0.9375]
DL CCA Probability P_{CCA_DL} Note 4.7	1,2,3		[0.75]/[0.75]	[0.75]/[0.75]	[0.75]/[0.75]	[0.75]/[0.75]
UL CCA probability P_{CCA_UL}	1,2,3		[1.0]	[1.0]	[1.0]	[1.0]
N_{oc} Note2	1,2,3	dBm/15kHz	-94.65			
N_{oc} Note2	1,2,3	dBm/SSB SCS	-91.65			
$\hat{E}_s / I_{ot}$	1,2,3	dB	0	0	-Infinity	3
SSB RSRP Note3	1,2,3	dBm/SSB SCS	-91.65	-91.65	-Infinity	-88.65
Io Note3	1,2,3	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.84
$\hat{E}_s / N_{oc}$	1,2,3	dB	0	0	-Infinity	3
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						

Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	DL and UL CCA probabilities apply for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.
Note 5:	The signal levels apply for SSS Res when the discovery burst is transmitted during DBT windows.
Note 6:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 7:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2}.

A.13.3.3.2.3 Test Requirements

The UE shall send L1-RSRP report every 80 slots. No later than 640 ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute accuracy requirement in clause 10.1.19.1.1 and relative accuracy requirement in clause 10.1.19.1.2. The rate of correct events observed during repeated tests shall be at least 90%.

The UE shall send L1-RSRP report of both SSB0 and SSB1 in Cell 2.

NOTE: The actual overall delays measured in the test may be up to 2xTTI DCCH higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.13.4 Measurement performance

A.13.4.1 SS-RSRP

A.13.4.1.1 Intra-frequency measurement accuracy on a carrier frequency with CCA

A.13.4.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy on the carrier frequency with CCA is within the specified limits. This test will verify the requirements in clauses 10.1.36.1.1 and 10.1.36.1.2 for intra-frequency measurements under CCA.

A.13.4.1.1.2 Test parameters

Three cells are deployed in the test, which are FR1 PCell (Cell 1), and two cells on the same carrier frequency with CCA and transmit SSBs in DBT windows according to DL CCA model: SCell (Cell 2) and a neighbour cell (Cell 3). Supported test configurations are shown in table A.13.4.1.1.2-1. Both absolute and relative accuracy of SS-RSRP intra-frequency measurements are tested by using the parameters in A.13.4.1.1.2-2.

Table A.13.4.1.1.2-1: SS-RSRP Intra frequency SS-RSRP supported test configurations

Config	Description
1	NR carrier with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR carrier without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR carrier with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR carrier without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR carrier with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

	NR carrier without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations for each supported band	

Table A.13.4.1.1.2-2: SS-RSRP Intra frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 2	Cell 3	Cell 2	Cell 3	Cell 2	Cell 3
Cell ID			489	0	489	0	489	0
SSB ARFCN			freq1		freq1		freq1	
DL CCA model			As specified in clause A.3.26.2.1					
UL CCA model			As specified in clause A.3.26.2.2					
P_{CCA_DL} for dynamic channel access Note 7,9			$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75					
P_{CCA_DL} for semi-static channel access Note 8,9			P_{CCA_DL}=0.9375					
P_{CCA_UL}			1					
TDD configuration	Config 1,2,3		TDDConf.1.1 CCA					
$BW_{channel}$	Config 1,2,3	MHz	40: $N_{RB,c}$ = 106					
BWP BW	Config 1,2,3		40: $N_{RB,c}$ = 106					
CCA model	Config 1,2,3		TBD					
Downlink initial BWP configuration			DLBWP.0.1					
Downlink dedicated BWP configuration			DLBWP.1.1					
Uplink initial BWP configuration			ULBWP.0.1					
Uplink dedicated BWP configuration			ULBWP.1.1					
TRS configuration	Config 1,2,3		TRS.1.2 TDD	NA	TRS.1.2 TDD	NA	TRS.1.2 TDD	NA
DRX Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1,2,3		SR.1.1 CCA	-	SR.1.1 CCA	-	SR.1.1 CCA	-
RMSI CORESET Reference Channel	Config 1,2,3		CR.1.1 CCA	-	CR.1.1 CCA	-	CR.1.1 CCA	-
Control channel RMC	Config 1,2,3		CR.1.1 CCA	-	CR.1.1 CCA	-	CR.1.1 CCA	-
SSB configuration for semi-static channel access	Config 1,2,3		SSB.1 CCA	SSB.1 CCA	SSB.1 CCA	SSB.1 CCA	SSB.1 CCA	SSB.1 CCA
SSB configuration for dynamic channel access	Config 1,2,3		SSB.2 CCA	SSB.2 CCA	SSB.2 CCA	SSB.2 CCA	SSB.2 CCA	SSB.2 CCA
DBT window configuration	Config 1,2,3		DBT.1	DBT.1	DBT.1	DBT.1	DBT.1	DBT.1
Time offset with Cell 1	Config 1,2,3	µs	-	3	-	3	-	3
SMTC configuration	Config 1,2,3		SMTC.1					
OCNG Patterns			OCNG pattern 1					
PDSCH/PDCCH subcarrier spacing	Config 1,2,3	kHz	30 kHz					
EPRE ratio of PSS to SSS		dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} Note2	Config 1,2,3	NR_CCA_FR1_I	Not applicable Note 5		-94		-110	
		NR_CCA_FR1_J					-109.5	

N_{oc} Note2	Config 1,2,3	NR_CCA_FR1_I	dBm/SCS	Not applicable Note 5		-91		-107.0	
		NR_CCA_FR1_J						-106.5	
$\hat{E}_s/I_{ot}$ Note6			dB	2.46	-5.97	2.46	-5.97	-2.01	-3.54
$\hat{E}_s/N_{oc}$ Note6			dB	6	1	6	1	1	0
SS-RSRP Note3,6	Config 1,2,3	NR_TDD_FR1_I	dBm/SCS	Not applicable Note 5	Not applicable Note 5	-85	-90	-106.00	-107.00
								-105.50	-106.50
Io Note3	Config 1,2,3	NR_CCA_FR1_I	dBm/ 38.16MHz	Not applicable Note 5		-51.99		-70.82	
		NR_CCA_FR1_J						-70.32	
Propagation condition			-	AWGN					
Antenna configuration				1x2					

NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
NOTE 5: Subtest 1 is not used when testing with 30kHz SSB SCS.
NOTE 6: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.
NOTE 7: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
NOTE 8: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
NOTE 9: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

A.13.4.1.1.3 Test Requirements

The SS-RSRP measurement accuracy for cell 2 and cell 3 shall fulfil absolute requirement in clause 10.1.36.1.1 and relative requirement in clause 10.1.36.1.2.

A.13.4.2 SS-RSRQ

A.13.4.2.1 Intra-frequency measurement accuracy on SCC

A.13.4.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.29.1.1.

A.13.4.2.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table A.13.4.2.1.2-1. The absolute accuracy of SS-RSRQ intra-frequency measurement is tested by using the parameters in Table A.13.4.2.1.2-2 and Table A.13.4.2.1.2-3. In all test cases, Cell 1 is the PCell, Cell 2 is the SCell with CCA, and Cell 3 is the target cell with CCA. Three sub-tests (Test 1, Test 2, and Test 3) are provided different N_{oc} on Cells 1, 2, and 3.

Table A.13.4.2.1.2-1: SS-RSRQ Intra frequency SS-RSRQ supported test configurations

Config	Description
1	Without CCA: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

2	Without CCA: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
3	Without CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.13.4.2.1.2-2: SS-RSRQ Intra frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 2	Cell 3	Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN			freq2	freq2	freq2	freq2	freq2	freq2
DL CCA model	Config 1, 2, 3		As specified in clause A.3.26.2.1					
UL CCA model	Config 1, 2, 3		As specified in clause A.3.26.2.2					
UL CCA probability	P_{CCA_UL}		1.0	-	1.0	-	1.0	-
DL CCA probability for semi-static channel access Note 7, 8	P_{CCA_DL}		0.9375	-	0.9375	-	0.9375	-
DL CCA probability for dynamic channel access Note 8, 9	$P_{CCA_DL_1}$		0.75	-	0.75	-	0.75	-
	$P_{CCA_DL_2}$		0.75	-	0.75	-	0.75	-
Duplex mode	Config 1, 2, 3		TDD					
TDD configuration	Config 1, 2, 3		TDDConf.1.1 CCA					
$BW_{channel}$	Config 1, 2, 3	MHz	40: $N_{RB,c}$ = 106					
Gap Pattern ID			0					
BWP configuration	Initial DL BWP		DLBWP.0.1					
	Dedicated DL BWP		DLBWP.1.1					
	Initial UL BWP		ULBWP.0.1					
	Dedicated UL BWP		ULBWP.1.1					
DRX Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1, 2, 3		SR1.1 CCA		SR1.1 CCA		SR1.1 CCA	
RMSI CORESET Reference Channel	Config 1, 2, 3		CR.1.1 CCA		CR.1.1 CCA		CR.1.1 CCA	
Control Channel RMC	Config 1, 2, 3		CCR.1.1 CCA		CCR.1.1 CCA		CCR.1.1 CCA	
TRS Configuration	Config 1, 2, 3		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD	
OCNG Patterns			OP. 1					
SS-RSSI-Measurement			Not Applicable					
Time offset with Cell 1	Config 1, 2, 3	µs	3	3	3	3	3	3
DBT Window configuration	Config 1, 2, 3		DBT.1					
SSB configuration	Config 1, 2, 3		SSB.1 CCA for semi-static channel access SSB.2 CCA for dynamic channel access					
SMTC configuration	Config 1, 2, 3		SMTC.1					
CSI-RS for tracking	Config 1, 2, 3		TRS.1.2 TDD					
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 3	kHz	30 kHz					
EPRE ratio of PSS to SSS		dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								

EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2		NR_CCA_FR1_I	dBm/15kHz	-91		-		-110	
		NR_CCA_FR1_J						-109.5	
N_{oc} Note2	Config 1, 2, 3	NR_CCA_FR1_I		-88		-		-107	
		NR_CCA_FR1_J						-106.5	
$\hat{E}_s/I_{ot}$			dB	-1.76		-4.7		-5.46	-5.46
$\hat{E}_s/N_{oc}$			dB	3	3	-2.9	-2.9	-4	-4
SS-RSRP Note 3	Config 1, 2, 3	NR_CCA_FR1_I		-85	-85	-	-	-111	-111
		NR_CCA_FR1_J						-110.5	-110.5
SS-RSRQ Note3		NR_CCA_FR1_I	dB	-14.77	-14.77	-16.76	-16.76	-17.34	-17.34
		NR_CCA_FR1_J							
Io Note3	Config 1, 2, 3	NR_CCA_FR1_I	dBm/ 38.16MHz	-50		-		-73.4	
		NR_CCA_FR1_J						-72.9	
Propagation condition			-	AWGN	AWGN	AWGN	AWGN	AWGN	AWGN
Antenna configuration				1x2	1x2	1x2	1x2	1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRQ, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: NR operating band groups are as defined in clause 3.5.2.
Note 6: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configuration.
Note 7: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 8: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 9: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

Table A.13.4.2.1.2-3: SS-RSRQ Intra frequency test parameters for NR PCell

Parameter		Unit	Test 1	Test 2	Test 3
			Cell 1	Cell 1	Cell 1
SSB ARFCN			freq1		
Duplex mode	Config 1		FDD		
	Config 2,3		TDD		
TDD configuration	Config 1		Not Applicable		
	Config 2		TDDConf.1.1		
	Config 3		TDDConf.2.1		
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52		
	Config 2		10: $N_{RB,c}$ = 52		
	Config 3		40: $N_{RB,c}$ = 106		
Gap Pattern ID			0		
BWP configuration	Initial DL BWP		DLBWP.0.1		

		Dedicated DL BWP		DLBWP.1.1		
		Initial UL BWP		ULBWP.0.1		
		Dedicated UL BWP		ULBWP.1.1		
DRX Cycle			ms	Not Applicable		
PDSCH Reference measurement channel		Config 1		SR.1.1 FDD		
		Config 2		SR.1.1 TDD		
		Config 3		SR2.1 TDD		
RMSI CORESET Reference Channel		Config 1		CR.1.1 FDD		
		Config 2		CR.1.1 TDD		
		Config 3		CR.2.1 TDD		
Control Channel RMC		Config 1		CCR.1.1 FDD		
		Config 2		CCR.1.1 TDD		
		Config 3		CCR.2.1 TDD		
TRS Configuration		Config 1		TRS.1.1 FDD		
		Config 2		TRS.1.1 TDD		
		Config 3		TRS.1.2 TDD		
OCNG Patterns				OP. 1		
SS-RSSI-Measurement				Not Applicable		
SMTC configuration		Config 1		SMTC.2		
		Config 2,3		SMTC.1		
SSB configuration		Config 1,2		SSB.1 FR1		
		Config 3		SSB.2 FR1		
CSI-RS for tracking		Config 1		TRS.1.1 FDD		
		Config 2		TRS.1.1 TDD		
		Config 3		TRS.1.2 TDD		
PDSCH/PDCCH subcarrier spacing		Config 1,2	kHz	15 kHz		
		Config 3		30 kHz		
EPRE ratio of PSS to SSS			dB	0		
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/15kHz	-85	-101	-114
		NR_FDD_FR1_B				-113.5
		NR_TDD_FR1_C				-113
		NR_FDD_FR1_D, NR_TDD_FR1_D				-112.5
		NR_FDD_FR1_E, NR_TDD_FR1_E				-112
		NR_FDD_FR1_F				-111.5
		NR_FDD_FR1_G				-111
		NR_FDD_FR1_H				-110.5

	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-91	-	-114
		NR_FDD_FR1_B				-113.5
		NR_TDD_FR1_C				-113
		NR_FDD_FR1_D, NR_TDD_FR1_D				-112.5
		NR_FDD_FR1_E, NR_TDD_FR1_E				-112
		NR_FDD_FR1_F				-111.5
		NR_FDD_FR1_G				-111
		NR_FDD_FR1_H				-110.5
N_{oc} Note2	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/SCS	-85	-101	-114
		NR_FDD_FR1_B				-113.5
		NR_TDD_FR1_C				-113
		NR_FDD_FR1_D, NR_TDD_FR1_D				-112.5
		NR_FDD_FR1_E, NR_TDD_FR1_E				-112
		NR_FDD_FR1_F				-111.5
		NR_FDD_FR1_G				-111
		NR_FDD_FR1_H				-110.5
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-88	-	-111
		NR_FDD_FR1_B				-110.5
		NR_TDD_FR1_C				-110
		NR_FDD_FR1_D, NR_TDD_FR1_D				-109.5
		NR_FDD_FR1_E, NR_TDD_FR1_E				-109
		NR_FDD_FR1_F				-108.5
		NR_FDD_FR1_G				-108
		NR_FDD_FR1_H				-107.5
$\hat{E}_s/I_{ot}$			dB	-1.76	-4.7	-5.46
$\hat{E}_s/N_{oc}$			dB	3	-2.9	-4
SS-RSRP Note 3	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/SCS	-82	-103.9	-118
		NR_FDD_FR1_B				-117.5
		NR_TDD_FR1_C				-117
		NR_FDD_FR1_D, NR_TDD_FR1_D				-116.5
		NR_FDD_FR1_E, NR_TDD_FR1_E				-116
		NR_FDD_FR1_F				-115.5
		NR_FDD_FR1_G				-115
		NR_FDD_FR1_H				-114.5
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-85	-	-115
		NR_FDD_FR1_B				-114.5

		NR_TDD_FR1_C				-114
		NR_FDD_FR1_D, NR_TDD_FR1_D				-113.5
		NR_FDD_FR1_E, NR_TDD_FR1_E				-113
		NR_FDD_FR1_F				-112.5
		NR_FDD_FR1_G				-112
		NR_FDD_FR1_H				-111.5
SS-RSRQ Note3		NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dB	-14.77	-16.76	-17.34
		NR_FDD_FR1_B				
		NR_TDD_FR1_C				
		NR_FDD_FR1_D, NR_TDD_FR1_D				
		NR_FDD_FR1_E, NR_TDD_FR1_E				
		NR_FDD_FR1_F				
		NR_FDD_FR1_G				
		NR_FDD_FR1_H				
Io Note3	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 9.36MHz	-50	-70	-83.5
		NR_FDD_FR1_B				-83
		NR_TDD_FR1_C				-82.5
		NR_FDD_FR1_D, NR_TDD_FR1_D				-82
		NR_FDD_FR1_E, NR_TDD_FR1_E				-81.5
		NR_FDD_FR1_F				-81
		NR_FDD_FR1_G				-80.5
		NR_FDD_FR1_H				-80
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 38.16MHz	-50	-	-77.4
		NR_FDD_FR1_B				-76.9
		NR_TDD_FR1_C				-76.4
		NR_FDD_FR1_D, NR_TDD_FR1_D				-75.9
		NR_FDD_FR1_E, NR_TDD_FR1_E				-75.4
		NR_FDD_FR1_F				-74.9
		NR_FDD_FR1_G				-74.4
		NR_FDD_FR1_H				-73.9
Propagation condition			-	AWGN	AWGN	AWGN
Antenna configuration				1x2	1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3:	SS-RSRQ, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	NR operating band groups are as defined in clause 3.5.2.
Note 6:	The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

A.13.4.2.1.3 Test Requirements

The SS-RSRQ measurement accuracy shall fulfil the requirements in clause 10.1.29.1.1.

A.13.4.3 SS-SINR

A.13.4.3.1 Intra-frequency measurement accuracy on SCC

A.13.4.3.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.31.1.1.

A.13.4.3.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table A.13.4.3.1.2-1. The absolute accuracy of SS-SINR intra-frequency measurement is tested by using the parameters in Table A.13.4.3.1.2-2 and Table A.13.4.3.1.2-3. In all test cases, Cell 1 is the PCell, Cell 2 is the SCell with CCA, and Cell 3 is the target cell with CCA. Two sub-tests (Test 1 and Test 2) are provided different N_{oc} on Cells 1, 2, and 3.

Table A.13.4.3.1.2-1: SS-SINR Intra frequency SS-SINR supported test configurations

Config	Description
1	Without CCA: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	Without CCA: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
3	Without CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.13.4.3.1.2-2: SS-SINR Intra frequency test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN			freq2	freq2	freq2	freq2
DL CCA model	Config 1, 2, 3		As specified in clause A.3.26.2.1			
UL CCA model	Config 1, 2, 3		As specified in clause A.3.26.2.2			
UL CCA probability	P_{CCA_UL}		1.0	-	1.0	-
DL CCA probability for semi-static channel access Note 7, 8	P_{CCA_DL}		0.9375	-	0.9375	-
DL CCA probability for dynamic channel access Note 8, 9	$P_{CCA_DL_1}$		0.75	-	0.75	-
	$P_{CCA_DL_2}$		0.75	-	0.75	-
Duplex mode	Config 1, 2, 3		TDD			

TDD configuration		Config 1, 2, 3		TDDConf.1.1 CCA			
Downlink initial BWP configuration				DLBWP.0.1			
Downlink dedicated BWP configuration				DLBWP.1.1			
Uplink initial BWP configuration				ULBWP.0.1			
Uplink dedicated BWP configuration				ULBWP.1.1			
DRX Cycle configuration			ms	Not Applicable			
TRS configuration		Config 1, 2, 3		TRS.1.2 TDD		TRS.1.2 TDD	
PDSCH Reference measurement channel		Config 1, 2, 3		SR.1.1 CCA		SR.1.1 CCA	
RMSI CORESET Reference Channel		Config 1, 2, 3		CR.1.1 CCA		CR.1.1 CCA	
Dedicated CORESET Reference Channel		Config 1, 2, 3		CCR.1.1 CCA		CCR.1.1 CCA	
OCNG Patterns				OP.1			
SS-RSSI-Measurement				Not Applicable			
DBT Window configuration		Config 1, 2, 3		DBT.1			
Time offset with Cell 1		Config 1, 2, 3	μs	3 (for Cell 2)	3	3 (for Cell 2)	3
SSB configuration		Config 1, 2, 3		SSB.1 CCA for semi-static channel access SSB.2 CCA for dynamic channel access			
SMTC configuration		Config 1, 2, 3		SMTC.1			
PDSCH/PDCCH subcarrier spacing		Config 1, 2, 3	kHz	30			
EPRE ratio of PSS to SSS			dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		NR_CCA_FR1_I	dBm/15kHz	-93		-112	
		NR_CCA_FR1_J				-111.5	
N_{oc} Note2	Config 1, 2, 3	NR_CCA_FR1_I	dBm/SCS	-90		-109	
		NR_CCA_FR1_J				-108.5	
$\hat{E}_s / I_{ot}$			dB	0	-3.19	-5.46	-5.46
$\hat{E}_s / N_{oc}$			dB	4.54	2.66	-4	-4
SS-RSRP Note3	Config 1, 2, 3	NR_CCA_FR1_I	dBm/SCS	-85.46	-87.34	-113	-113
		NR_CCA_FR1_J				-112.5	-112.5
SS-SINR Note3		NR_CCA_FR1_I	dB	0	-3.19	-5.46	-5.46
		NR_CCA_FR1_J					
Io Note3	Config 1, 2, 3	NR_CCA_FR1_I	dBm/38.16MHz	-51.41		-75.41	
		NR_CCA_FR1_J				-74.91	
Propagation condition			-	AWGN			
Antenna configuration			-	1x2			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: NR operating band groups are as defined in clause 3.5.2.
Note 6: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configuration.
Note 7: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 8: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 9: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

A.13.4.3.1.2-3: SS-SINR Intra frequency test parameters for NR PCell

Parameter		Unit	Test 1	Test 2
			Cell 1	Cell 1
SSB ARFCN			freq1	freq1
Duplex mode	Config 1		FDD	FDD
	Config 2,3		TDD	TDD
TDD configuration	Config 1		Not Applicable	Not Applicable
	Config 2		TDDConf.1.1	TDDConf.1.1
	Config 3		TDDConf.2.1	TDDConf.2.1
Downlink initial BWP configuration			DLBWP.0.1	DLBWP.0.1
Downlink dedicated BWP configuration			DLBWP.1.1	DLBWP.1.1
Uplink initial BWP configuration			ULBWP.0.1	ULBWP.0.1
Uplink dedicated BWP configuration			ULBWP.1.1	ULBWP.1.1
DRX Cycle configuration		ms	Not Applicable	Not Applicable
TRS configuration	Config 1		TRS.1.1 FDD	TRS.1.1 FDD
	Config 2		TRS.1.1 TDD	TRS.1.1 TDD
	Config 3		TRS.1.2 TDD	TRS.1.2 TDD
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	SR.1.1 FDD
	Config 2		SR.1.1 TDD	SR.1.1 TDD
	Config 3		SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	CR.1.1 FDD
	Config 2		CR.1.1 TDD	CR.1.1 TDD
	Config 3		CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD	CCR.1.1 FDD
	Config 2		CCR.1.1 TDD	CCR.1.1 TDD
	Config 3		CCR.2.1 TDD	CCR.2.1 TDD
OCNG Patterns			OP.1	OP.1
SS-RSSI-Measurement			Not Applicable	Not Applicable
SMTC configuration	Config 1 Config 2,3		SMTC.2	SMTC.2
			SMTC.1	SMTC.1

SSB configuration		Config 1,2		SSB.1 FR1	SSB.1 FR1
		Config 3		SSB.2 FR1	SSB.2 FR1
PDSCH/PDCCH subcarrier spacing		Config 1,2	kHz	15	15
		Config 3		30	30
EPRE ratio of PSS to SSS			dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} Note2		NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/15kHz	-93	-116
		NR_FDD_FR1_B			-115.5
		NR_TDD_FR1_C			-115
		NR_FDD_FR1_D, NR_TDD_FR1_D			-114.5
		NR_FDD_FR1_E, NR_TDD_FR1_E			-114
		NR_FDD_FR1_F			-113.5
		NR_FDD_FR1_G			-113
		NR_FDD_FR1_H			-112.5
N_{oc} Note2	Config 1,2		dBm/SCS	-93	Same as Noc for 15 kHz
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-90	-113
		NR_FDD_FR1_B			-112.5
		NR_TDD_FR1_C			-112
		NR_FDD_FR1_D, NR_TDD_FR1_D			-111.5
		NR_FDD_FR1_E, NR_TDD_FR1_E			-111
		NR_FDD_FR1_F			-110.5
		NR_FDD_FR1_G			-110
		NR_FDD_FR1_H			-109.5
$\hat{E}_s / I_{ot}$			dB	0	-5.46
$\hat{E}_s / N_{oc}$			dB	4.54	-4
SS-RSRP Note3	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/SCS	-88.46	-120
		NR_FDD_FR1_B			-119.5
		NR_TDD_FR1_C			-119
		NR_FDD_FR1_D, NR_TDD_FR1_D			-118.5
		NR_FDD_FR1_E, NR_TDD_FR1_E			-118
		NR_FDD_FR1_F			-117.5
		NR_FDD_FR1_G			-117
		NR_FDD_FR1_H			-116.5
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-85.46	-117
		NR_FDD_FR1_B			-116.5

		NR_TDD_FR1_C			-116
		NR_FDD_FR1_D, NR_TDD_FR1_D			-115.5
		NR_FDD_FR1_E, NR_TDD_FR1_E			-115
		NR_FDD_FR1_F			-114.5
		NR_FDD_FR1_G			-114
		NR_FDD_FR1_H			-113.5
SS-SINR Note3		NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dB	0	-5.46
		NR_FDD_FR1_B			
		NR_TDD_FR1_C			
		NR_FDD_FR1_D, NR_TDD_FR1_D			
		NR_FDD_FR1_E, NR_TDD_FR1_E			
		NR_FDD_FR1_F			
		NR_FDD_FR1_G			
		NR_FDD_FR1_H			
Io Note3	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 9.36MHz	-57.5	-85.51
		NR_FDD_FR1_B			-85.01
		NR_TDD_FR1_C			-84.51
		NR_FDD_FR1_D, NR_TDD_FR1_D			-84.01
		NR_FDD_FR1_E, NR_TDD_FR1_E			-83.51
		NR_FDD_FR1_F			-83.01
		NR_FDD_FR1_G			-82.51
		NR_FDD_FR1_H			-82.01
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 38.16MHz	-51.41	-79.41
		NR_FDD_FR1_B			-78.91
		NR_TDD_FR1_C			-78.41
		NR_FDD_FR1_D, NR_TDD_FR1_D			-77.91
		NR_FDD_FR1_E, NR_TDD_FR1_E			-77.41
		NR_FDD_FR1_F			-76.91
		NR_FDD_FR1_G			-76.41
		NR_FDD_FR1_H			-75.91
Propagation condition			-	AWGN	AWGN
Antenna configuration			-	1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: NR operating band groups are as defined in clause 3.5.2.

Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

A.13.4.3.1.3 Test Requirements

The SS-SINR measurement accuracy shall fulfil the requirements in clause 10.1.31.1.1.

A.13.4.4 L1-RSRP measurement for beam reporting with CCA serving cell

A.13.4.4.1 SSB based L1-RSRP measurement

A.13.4.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.33.1 for L1-RSRP measurements based on SSB with the testing configurations for NR cells in Table A.13.4.4.1.1-1.

Table A.13.4.4.1.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
1	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
3	Without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.13.4.4.1.2 Test parameters

In this set of test cases there are two cells in the test, PCell (Cell 1) and a SCell under CCA (Cell2). Cell 2 operates on a carrier frequency with CCA and transmits SSBs in DBT window according to DL CCA model.

Two sub-tests (Test 1 and Test 2) are provided with different N_{oc} on Cell 2. The test parameters for the Cell 1 and Cell 2 are given in Table A.13.4.4.1.2-1 below. The absolute and relative accuracy of L1-RSRP measurements are tested by using the parameters in Table A.13.4.4.1.2-1.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

There is no measurement gap configured in the test. Before the test, UE is configured one SSB resource set with two SSB resources. On Cell 2, UE is configured to perform L1-RSRP measurement based on the SSB resources 0 and 1.

Table A.13.4.4.1.2-1: FR1 SSB based L1-RSRP test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
Active PCell/SCell Configuration	1~3		PCell	SCell	PCell	SCell
SSB GSCN	1~3		freq1	freq2	freq1	freq2
DL CCA model	1~3		N/A	As specifieed in A.3.20.2.1	N/A	As specifieed in A.3.20.2.1
UL CCA model	1~3		N/A	As specified in A.3.20.2.2	N/A	As specified in A.3.20.2.2
Duplex mode	1		FDD	TDD	FDD	TDD
	2,3		TDD		TDD	
TDD configuration	1		N/A	TDDConf.1.1 CCA	N/A	TDDConf.1.1 CCA
	2		TDDConf. 1.1		TDDConf. 1.1	

	3		TDDConf. 2.1		TDDConf. 2.1	
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52	40: $N_{RB,c}$ = 106	10: $N_{RB,c}$ = 52	40: $N_{RB,c}$ = 106
	2		10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
	3		40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
PDSCH Reference measurement channel	1		SR.1.1 FDD	SR.1.1 CCA	SR.1.1 FDD	SR.1.1 CCA
	2		SR.1.1 TDD		SR.1.1 TDD	
	3		SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET Reference Channel	1		CR.1.1 FDD	CR.1.1 CCA	CR.1.1 FDD	CR.1.1 CCA
	2		CR.1.1 TDD		CR.1.1 TDD	
	3		CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD	CCR.1.1 CCA	CCR.1.1 FDD	CCR.1.1 CCA
	2		CCR.1.1 TDD		CCR.1.1 TDD	
	3		CCR.2.1 TDD		CCR.2.1 TDD	
SSB configuration for Semi-static channel access	1		SSB.3 FR1	SSB.3 CCA	SSB.3 FR1	SSB.3 CCA
	2		SSB.3 FR1		SSB.3 FR1	
	3		SSB.4 FR1		SSB.4 FR1	
SSB configuration for Dynamic channel access	1		SSB.3 FR1	SSB.4 CCA	SSB.3 FR1	SSB.4 CCA
	2		SSB.3 FR1		SSB.3 FR1	
	3		SSB.4 FR1		SSB.4 FR1	
TRS configuration	1		TRS.1.1 FDD	TRS.1.2 TDD	TRS.1.1 FDD	TRS.1.2 TDD
	2		TRS.1.1 TDD		TRS.1.1 TDD	
	3		TRS.1.2 TDD		TRS.1.2 TDD	
OCNG Patterns	1~3		OP.1		OP.1	
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1		DLBWP.1.1 ULBWP.1.1	
SMTC configuration	1~3		SMTC.1	N/A	SMTC.1	N/A
DBT Window Configuration	1~3		N/A	DBT.1	N/A	DBT.1
reportConfigType	1~3		periodic		periodic	
reportQuantity	1~3		ssb-Index-RSRP		ssb-Index-RSRP	
Number of reported RS	1~3		2		2	
L1-RSRP reporting period	1~3		slot80		slot80	
EPRE ratio of PSS to SSS EPRE ratio of PBCH DMRS to SSS EPRE ratio of PBCH to PBCH DMRS EPRE ratio of PDCCH DMRS to SSS EPRE ratio of PDCCH to PDCCH DMRS EPRE ratio of PDSCH DMRS to SSS EPRE ratio of PDSCH to PDSCH DMRS EPRE ratio of OCNG DMRS to SSS[Note 1]	1~3	dB	0		0	

EPRE ratio of OCNG to OCNG DMRS Note 1						
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1~3	dBm/15 kHz	-94.65	-94.65	-
	NR_FDD_FR1_B					-
	NR_TDD_FR1_C					-
	NR_FDD_FR1_D, NR_TDD_FR1_D					-
	NR_FDD_FR1_E, NR_TDD_FR1_E					-
	NR_FDD_FR1_F					-
	NR_FDD_FR1_G					-
	NR_FDD_FR1_H					-
	NR_TDD_FR1_I				-	-113
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1~3	dBm/SSB SCS	-91.65	-91.65	-
	NR_FDD_FR1_B					-
	NR_TDD_FR1_C					-
	NR_FDD_FR1_D, NR_TDD_FR1_D					-
	NR_FDD_FR1_E, NR_TDD_FR1_E					-
	NR_FDD_FR1_F					-
	NR_FDD_FR1_G					-
	NR_FDD_FR1_H					-
	NR_TDD_FR1_I				-	-110
$\hat{E}_s/I_{ot}$		1~3	dB	10	10	-3
SS-RSRP Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1~3	dBm/SCS	-81.65	-81.65	-
	NR_FDD_FR1_B					-
	NR_TDD_FR1_C					-
	NR_FDD_FR1_D, NR_TDD_FR1_D					-
	NR_FDD_FR1_E, NR_TDD_FR1_E					-
	NR_FDD_FR1_F					-
	NR_FDD_FR1_G					-
	NR_FDD_FR1_H					-
	NR_TDD_FR1_I				-	-113
Io Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1~3	dBm/ 38.16MHz	-50.19	-50.19	-
	NR_FDD_FR1_B					-
	NR_TDD_FR1_C					-
	NR_FDD_FR1_D, NR_TDD_FR1_D					-
	NR_FDD_FR1_E, NR_TDD_FR1_E					-
	NR_FDD_FR1_F					-
	NR_FDD_FR1_G					-
	NR_FDD_FR1_H					-
	NR_TDD_FR1_I				-	-77.19
$\hat{E}_s/N_{oc}$		1~3	dB	10	10	-3
Propagation condition		1~3		AWGN	AWGN	
Antenna configuration		1~3		1x2	1x2	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

A.13.4.4.1.3 Test Requirements

In both Test 1 and Test 2, the L1-RSRP measurement accuracy for SSB#0 and SSB#1 of Cell 2 shall fulfil the requirements in clauses 10.1.33.1.

A.13.4.5 RSSI

A.13.4.5.1 Intra-frequency RSSI measurement accuracy on a carrier with CCA

A.13.4.5.1.1 Test Purpose and Environment

The purpose of this test is to verify that the RSSI measurement accuracy is within the specified limits. This test will partially verify the RSSI measurement accuracy requirements in Section 10.1.34.1.

A.13.4.5.1.2 Test parameters

In all test cases, Cell 1 is the PCell on a licensed FR1 band and Cell 2 is the SCell with CCA. RSSI is measured on channel number 2. Supported test configurations are shown in table A.13.4.5.1.2-1. The accuracy of RSSI intra-frequency measurements is tested by using the parameters in A.13.4.5.1.2-2 and A.13.4.5.1.2-3.

Table A.13.4.5.1.2-1: Intra frequency RSSI supported test configurations

Configuration	Description
1	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
3	Without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Table A.13.4.5.1.2-2: RSSI Intra frequency test parameters

Parameter		Configurations	Unit	Test 1	
				Cell 1	Cell 2
RF Channel Number				1	2
$BW_{channel}$			MHz	40	40
SSB configuration	Semi-static channel access Note 1, 3	1,2,3		Configuration 1,2: SSB.1 FR1 Configuration 3: SSB.2 FR1	SSB.1 CCA
	Dynamic channel access Note 2, 3	1,2,3		Configuration 1,2: SSB.1 FR1	SSB.2 CCA

				Configuration 3: SSB.2 FR1	
P_{CCA_DL}				1	TBD
P_{CCA_UL}				1	TBD
DL CCA model				N/A	As specifieed in A.3.20.2.1
UL CCA model				N/A	As specified in A.3.20.2.2
Measurement bandwidth			n_{PRB}	Same as channel access bandwidth	
Channel access bandwidth			MHz	20	
DRX Cycle configuration			ms	Not Applicable	
PDSCH Reference measurement channel	1			SR.1.1 FDD	SR.1.1 CCA
	2,3			SR.1.1 TDD	
RMSI CORESET Reference Channel	1			CR.1.1 FDD	CR.1.1 CCA
	2,3			CR.1.1 TDD	
Dedicated CORESET Reference Channel	1			CCR.1.1 FDD	CCR.1.1 CCA
	2,3			CCR.1.1 TDD	
OCNG Patterns				OP.1	OP.1
EPRE ratio of PSS to SSS			dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} in slots not corresponding to RSSI measurement time configuration (RMTC)			dBm/SCS	-106	-106
N_{oc} in slots corresponding to RSSI measurement time configuration (RMTC)			dBm/SCS	-106	-87
$\hat{E}_s/I_{ot}$ in slots not corresponding to RSSI measurement time configuration (RMTC)			dB	2.5	2.5
$\hat{E}_s/I_{ot}$ in slots corresponding to RSSI measurement time configuration (RMTC)			dB	2.5	-Infinity
SS-RSRP in slots not corresponding to RSSI measurement time configuration (RMTC)			dBm/SCS	-103.5	-103.5
SS-RSRP in slots corresponding to RSSI measurement time configuration (RMTC)				-103.5	-Infinity
Io within measurement bandwidth in slots not corresponding to RSSI measurement time configuration (RMTC)			dBm/SCS	-101.6	-101.6
Io within measurement bandwidth in slots corresponding to RSSI			dBm/SCS	-101.6	-87

measurement time configuration (RMTC)				
Propagation condition		-	AWGN	
Note 1: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 2: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. Note 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.				

Table A.13.4.5.1.2-3: RSSI RMTC parameters

measDurationSymbols-r16	sym14or12
rmtc-Periodicity-r16	ms40
rmtc-SubframeOffset-r16	20
ref-SCS-CP-r16	kHz15
ReportInterval	ms120

A.13.4.5.1.3 Test Requirements

The average RSSI measurement accuracy shall fulfil the requirements in sections 10.1.34.1. The nominal RSSI used to evaluate the requirement shall be based on Io in slots corresponding to RSSI measurement time configuration (RMTC).

A.13.4.5.2 Inter-frequency RSSI measurement accuracy on a carrier with CCA

A.13.4.5.2.1 Test Purpose and Environment

The purpose of this test is to verify that the RSSI measurement accuracy is within the specified limits. This test will partially verify the RSSI measurement accuracy requirements in Section 10.1.34.2.

A.13.4.5.2.2 Test parameters

In all test cases, Cell 1 is the PCell on a licensed FR1 band and Cell 2 is the neighbour with CCA. RSSI is measured on channel number 2. Supported test configurations are shown in table A.13.4.5.2.2-1. The accuracy of RSSI inter-frequency measurements is tested by using the parameters in A.13.4.5.2.2-2 and A.13.4.5.2.3.

Table A.13.4.5.2.2-1: Inter frequency RSSI supported test configurations

Configuration	Description
1	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
3	Without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Table A.13.4.5.2.2-2: RSSI Inter frequency test parameters

Parameter	Configurations	Unit	Test 1	
			Cell 1	Cell 2
RF Channel Number			1	2
$BW_{channel}$		MHz	40	40

SSB configuration	Semi-static channel access Note 1, 3	1,2,3		Configuration 1,2: SSB.1 FR1 Configuration 3: SSB.2 FR1	SSB.1 CCA
	Dynamic channel access Note 2, 3	1,2,3		Configuration 1,2: SSB.1 FR1 Configuration 3: SSB.2 FR1	SSB.2 CCA
P_{CCA_DL}				1	TBD
P_{CCA_UL}				1	TBD
DL CCA model				N/A	As specifieed in A.3.20.2.1
UL CCA model				N/A	As specified in A.3.20.2.2
Measurement bandwidth			n_{PRB}	Same as channel access bandwidth	
Channel access bandwidth			MHz	20	
DRX Cycle configuration			ms	Not Applicable	
PDSCH Reference measurement channel		1		SR.1.1 FDD	NA
		2,3		SR.1.1 TDD	
RMSI CORESET Reference Channel		1		CR.1.1 FDD	NA
		2,3		CR.1.1 TDD	
Dedicated CORESET Reference Channel		1		CCR.1.1 FDD	NA
		2,3		CCR.1.1 TDD	
OCNG Patterns				OP.1	NA
EPRE ratio of PSS to SSS			dB	0	NA
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} in slots not corresponding to RSSI measurement time configuration (RMTC)			dBm/SCS	-106	-106
N_{oc} in slots corresponding to RSSI measurement time configuration (RMTC)			dBm/SCS	-106	-87
$\hat{E}_s / I_{ot}$ in slots not corresponding to RSSI measurement time configuration (RMTC)			dB	2.5	2.5
$\hat{E}_s / I_{ot}$ in slots corresponding to RSSI measurement time configuration (RMTC)			dB	2.5	-Infinity
SS-RSRP in slots not corresponding to RSSI measurement time configuration (RMTC)			dBm/SCS	-103.5	-103.5
SS-RSRP in slots corresponding to RSSI measurement time configuration (RMTC)				-103.5	-Infinity

Io within measurement bandwidth in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-101.6	-101.6
Io within measurement bandwidth in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-101.6	-87
Propagation condition		-	AWGN	
Note 1: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 2: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. Note 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.				

Table A.13.4.5.2.2-3: RSSI RMTC parameters

measDurationSymbols-r16	sym14or12
rmtc-Periodicity-r16	ms40
rmtc-SubframeOffset-r16	20
ref-SCS-CP-r16	kHz15
ReportInterval	ms120

A.13.4.5.2.3 Test Requirements

The average RSSI measurement accuracy shall fulfil the requirements in sections 10.1.34.2. The nominal RSSI used to evaluate the requirement shall be based on Io in slots corresponding to RSSI measurement time configuration (RMTC).

A.13.4.6 Channel occupancy

A.13.4.6.1 Intra-frequency channel occupancy measurement accuracy on SCC with CCA

A.13.4.6.1.1 Test Purpose and Environment

The purpose of this test is to verify that the channel occupancy measurement accuracy is within the specified limits. This test will partially verify the channel occupancy measurement accuracy requirements in Section 10.1.35.1.

A.13.4.6.1.2 Test parameters

In all test cases, Cell 1 is the PCell on a licensed FR1 band and Cell 2 is the SCell with CCA. Channel occupancy is measured on channel number 2. Supported test configurations are shown in table A.13.4.6.1.2-1. The accuracy of channel occupancy intra-frequency measurements is tested by using the parameters in A.13.4.6.1.2-2 and A.13.4.6.1.2-3.

Table A.13.4.6.1.2-1: Intra frequency CO supported test configurations

Configuration	Description
1	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
3	Without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Table A.13.4.6.1.2-2: CO Intra frequency test parameters

Parameter		Configurations	Unit	Test 1	
				Cell 1	Cell 2
RF Channel Number				1	2
$BW_{channel}$			MHz	40	40
SSB configuration	Semi-static channel access Note 1, 3	1,2,3		Configuration 1,2: SSB.1 FR1 Configuration 3: SSB.2 FR1	SSB.1 CCA
	Dynamic channel access Note 2, 3	1,2,3		Configuration 1,2: SSB.1 FR1 Configuration 3: SSB.2 FR1	SSB.2 CCA
P_{CCA_DL}				1	TBD
P_{CCA_UL}				1	TBD
DL CCA model				N/A	As specifieed in A.3.20.2.1
UL CCA model				N/A	As specified in A.3.20.2.2
Measurement bandwidth			η_{PRB}	Same as channel access bandwidth	
Channel access bandwidth			MHz	20	
DRX Cycle configuration			ms	Not Applicable	
PDSCH Reference measurement channel		1		SR.1.1 FDD	SR.1.1 CCA
		2,3		SR.1.1 TDD	
RMSI CORESET Reference Channel		1		CR.1.1 FDD	CR.1.1 CCA
		2,3		CR.1.1 TDD	
Dedicated CORESET Reference Channel		1		CCR.1.1 FDD	CCR.1.1 CCA
		2,3		CCR.1.1 TDD	
OCNG Patterns				OP.1	OP.1
EPRE ratio of PSS to SSS			dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} in slots not corresponding to RSSI measurement time configuration (RMTC)			dBm/SCS	-106	-106
N_{oc} in slots corresponding to RSSI measurement time configuration (RMTC)			dBm/SCS	-106	-87
$\hat{E}_s / I_{ot}$ in slots not corresponding to RSSI measurement time configuration (RMTC)			dB	2.5	2.5

$\hat{E}_s/I_{ot}$ in slots corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	-Infinity
SS-RSRP in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-103.5	-103.5
SS-RSRP in slots corresponding to RSSI measurement time configuration (RMTC)			-103.5	-Infinity
Io within measurement bandwidth in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/BW	-101.6	-101.6
Io within measurement bandwidth in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/BW	-101.6	-87
Propagation condition		-	AWGN	
channelOccupancyThreshold		dBm	-83	
Note 1: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 2: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. Note 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.				

Table A.13.4.6.1.2-3: CO RMTC parameters

measDurationSymbols-r16	sym14or12
rmtc-Periodicity-r16	ms40
rmtc-SubframeOffset-r16	20
ref-SCS-CP-r16	kHz15
ReportInterval	ms120

A.13.4.6.1.3 Test Requirements

The nominal reported *channelOccupancy s*hall be TBD. At least 90% of channel occupancy reports made by the UE shall indicate this value.

A.13.4.6.2 Inter-frequency channel occupancy measurement accuracy on a carrier with CCA

A.13.4.6.2.1 Test Purpose and Environment

The purpose of this test is to verify that the channel occupancy measurement accuracy is within the specified limits. This test will partially verify the channel occupancy measurement accuracy requirements in Section 10.1.35.2.

A.13.4.6.2.2 Test parameters

In all test cases, Cell 1 is the PCell on a licensed FR1 band and Cell 2 is the neighbour with CCA. Channel occupancy is measured on channel number 2. Supported test configurations are shown in table A.13.4.6.2.2-1. The accuracy of channel occupancy inter-frequency measurements is tested by using the parameters in A.13.4.6.2.2-2 and A.13.4.6.2.3.

Table A.13.4.6.2.2-1: Inter frequency CO supported test configurations

Configuration	Description

1	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
3	Without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Table A.13.4.6.2.2-2: CO Inter frequency test parameters

Parameter		Configurations	Unit	Test 1	
				Cell 1	Cell 2
RF Channel Number				1	2
$BW_{channel}$			MHz	40	40
SSB configuration	Semi-static channel access Note 1, 3	1,2,3		Configuration 1,2: SSB.1 FR1 Configuration 3: SSB.2 FR1	SSB.1 CCA
	Dynamic channel access Note 2, 3	1,2,3		Configuration 1,2: SSB.1 FR1 Configuration 3: SSB.2 FR1	SSB.2 CCA
P_{CCA_DL}				1	TBD
P_{CCA_UL}				1	TBD
DL CCA model				N/A	As specifieed in A.3.20.2.1
UL CCA model				N/A	As specified in A.3.20.2.2
Measurement bandwidth			n_{PRB}	Same as channel access bandwidth	
Channel access bandwidth			MHz	20	
DRX Cycle configuration			ms	Not Applicable	
PDSCH Reference measurement channel		1		SR.1.1 FDD	NA
		2,3		SR.1.1 TDD	
RMSI CORESET Reference Channel		1		CR.1.1 FDD	NA
		2,3		CR.1.1 TDD	
Dedicated CORESET Reference Channel		1		CCR.1.1 FDD	NA
		2,3		CCR.1.1 TDD	
OCNG Patterns				OP.1	NA
EPRE ratio of PSS to SSS			dB	0	NA
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} in slots not corresponding to RSSI measurement time configuration (RMTC)			dBm/SCS	-106	-106

N_{oc} in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-106	-87
$\hat{E}_s/I_{ot}$ in slots not corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	2.5
$\hat{E}_s/I_{ot}$ in slots corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	-Infinity
SS-RSRP in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-103.5	-103.5
SS-RSRP in slots corresponding to RSSI measurement time configuration (RMTC)			-103.5	-Infinity
Io within measurement bandwidth in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/BW	-101.6	-101.6
Io within measurement bandwidth in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/BW	-101.6	-87
Propagation condition		-	AWGN	
channelOccupancyThreshold		dBm	-83	
Note 1: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 2: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. Note 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.				

Table A.13.4.6.2.2-3: CO RMTC parameters

measDurationSymbols-r16	sym14or12
rmtc-Periodicity-r16	ms40
rmtc-SubframeOffset-r16	20
ref-SCS-CP-r16	kHz15
ReportInterval	ms120

A.13.4.6.2.3 Test Requirements

The nominal reported *channelOccupancy* shall be TBD. At least 90% of channel occupancy reports made by the UE shall indicate this value.

A.14 NR standalone tests for Satellite access

A.14.1 RRC_IDLE state mobility

A.14.1.1 Cell reselection to FR1 intra-frequency NR case

A.14.1.1.1 Test Purpose and Environment

This test is to verify the requirement for the intra frequency NR cell reselection requirements for satellite access specified in clause 4.2C.2.3.

A.14.1.1.2 Test Parameters

The test scenario comprises of 2 cells on 1 NR carrier configured each in a different satellite as given in tables A.14.1.1.2-1, A.14.1.1.2-2 and A.14.1.1.2-3. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Only cell 1 is already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2.

Table A.14.1.1.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode

Table A.14.1.1.2-2: General test parameters for intra frequency NR cell re-selection test case

Parameter		Unit	Value	Comment
Initial condition	Active cell		Cell1	
T2 end condition	Active cell		Cell2	
	Neighbour cells		Cell1	
Final condition	Active cell		Cell1	
	Neighbour cells		Cell2	
RF Channel Number			1	
Time offset between cells			3 ms	Asynchronous cells
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
DRX cycle length		s	1.28	The value shall be used for all cells in the test.
PRACH configuration index			102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			Not configured	
T1		s	>7	During T1, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed, The intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T2
T2		s	75	T2 needs to be defined so that cell re-selection reaction time is taken into account.

T3	s	30	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.14.1.1.2-3: Cell specific test parameters for intra frequency NR cell re-selection test case

Parameter	Unit	Cell 1			Cell 2		
		T1	T2	T3	T1	T2	T3
Satellite information		SSC.1 for GSO test SSC.2 for NGSO test			NSC.1 for GSO test NSC.2 for NGSO test		
PDSCH RMC configuration		SR.1.1 FDD			SR.1.1 FDD		
RMSI CORESET configuration		CR.1.1 FDD			CR.1.1 FDD		
Dedicated CORESET configuration		CCR.1.1 FDD			CCR.1.1 FDD		
OCNG Pattern		OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		ULBWP.0.1			ULBWP.0.1		
SSB configuration		SSB.1 FR1			SSB.5 FR1		
SMTC configuration		#1: SMTC.1 for Cell 1 #2: SMTC.4 for Cell 2			#1: SMTC.1 for Cell 1 #2: SMTC.4 for Cell 2		
RLM-RS		SSB			SSB		
Qrxlevmin	dBm/SCS	-130			-130		
Pcompensation	dB	0			0		
$Qhyst_s$	dB	0			0		
$Qoffset_{s,n}$	dB	0			0		
Cell_selection_and_reselection_quality_measurement		SS-RSRP			SS-RSRP		
$\hat{E}_s / I_{ot}$	dB	16	-3.11	2.79	-infinity	2.79	-3.11
N_{oc} Note2	dBm/SCS	-98					
N_{oc} Note2	dBm/15 kHz	-98					
$\hat{E}_s / N_{oc}$	dB	16	13	16	-infinity	16	13
SS-RSRP Note3	dBm/SCS	-82	-85	-82	-infinity	-82	-85
Io	dBm/9.36 MHz	-53.94	-52.21	-52.21	Same as parameters specified in Cell 1 columns-		
Treselection	s	0	0	0	0	0	0
SintrasearchP	dB	60			60		
Propagation Condition		AWGN					

A.14.1.1.3 Test Requirements

The cell reselection delay to a newly detectable cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on Cell 2.

The cell re-selection delay to a newly detectable cell shall be less than [TBD] s.

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the

RRCSetupRequest message to perform a Registration procedure for mobility and periodic registration update on cell 1.

The cell re-selection delay to an already detected cell shall be less than [TBD] s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a newly detectable cell can be expressed as: $K_{multi_SMTC} * T_{detect, NR_Intra} + T_{SI-NR}$, and to an already detected cell can be expressed as: $K_{multi_SMTC} * T_{evaluate, NR_ intra} + T_{SI-NR}$,

Where:

T_{detect, NR_Intra} See Table 4.2.2.3-1 in clause 4.2C.2.3

$T_{evaluate, NR_ intra}$ See Table 4.2.2.3-1 in clause 4.2C.2.3

K_{multi_SMTC} is described in clause 4.2C.2.3

T_{SI-NR} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280ms is assumed in this test case provided that SIB1 and SIB19 are scheduled with 20ms period and 80 ms period, respectively.

A.14.1.2 Cell reselection to FR1 intra-frequency NR cell for UE configured with [capability for enhanced requirements]

A.14.1.2.1 Test Purpose and Environment

This test is to verify the requirement for the intra frequency NR cell reselection requirements for satellite access specified in clause 4.2C.2.3.

A.14.1.2.2 Test Parameters

The test scenario comprises of 1 NR carrier and 2 cells as given in tables A.14.1.2.2-1, A.14.1.2.2-2 and A.14.1.2.2-3. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Only cell 1 is already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2. The flag [enhanced requirements] should be set.

Table A.14.1.2.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode

Table A.14.1.2.2-2: General test parameters for intra frequency NR cell re-selection test case

Parameter		Unit	Value	Comment
Initial condition	Active cell		Cell1	
T2 end condition	Active cell		Cell2	
	Neighbour cells		Cell1	
Final condition	Active cell		Cell1	
	Neighbour cells		Cell2	
RF Channel Number			1	
Time offset between cells			3 ms	Asynchronous cells

Access Barring Information	-	Not Sent	No additional delays in random access procedure.
DRX cycle length	s	1.28	The value shall be used for all cells in the test.
PRACH configuration index		102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell		Not configured	
T1	s	>7	During T1, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed, The intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T2
T2	s	40	T2 needs to be defined so that cell re-selection reaction time is taken into account.
T3	s	15	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.14.1.2.2-3: Cell specific test parameters for intra frequency NR cell re-selection test case

Parameter	Unit	Cell 1			Cell 2		
		T1	T2	T3	T1	T2	T3
Satellite information		SSC.1 for GSO test SSC.2 for NGSO test			NSC.1 for GSO test NSC.2 for NGSO test		
PDSCH RMC configuration		SR.1.1 FDD			SR.1.1 FDD		
RMSI CORESET configuration		CR.1.1 FDD			CR.1.1 FDD		
Dedicated CORESET configuration		CCR.1.1 FDD			CCR.1.1 FDD		
OCNG Pattern		OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		ULBWP.0.1			ULBWP.0.1		
SSB configuration		SSB.1 FR1			SSB.X FR1		
SMTC configuration		#1: SMTC.2 for Cell 1 #2: SMTC.7 for Cell 2			#1: SMTC.2 for Cell 1 #2: SMTC.7 for Cell 2		
RLM-RS		SSB			SSB		
Qrxlevmin	dBm/SCS	-130			-130		
Pcompensation	dB	0			0		
$Qhyst_s$	dB	0			0		
$Qoffset_{s,n}$	dB	0			0		
Cell_selection_and_reselection_quality_measurement		SS-RSRP			SS-RSRP		
$\hat{E}_s / I_{ot}$	dB	16	-3.11	2.79	-infinity	2.79	-3.11
N_{oc} Note2	dBm/SCS	-98					
N_{oc} Note2	dBm/15 kHz	-98					
$\hat{E}_s / N_{oc}$	dB	16	13	16	-infinity	16	13
SS-RSRP Note3	dBm/SCS	-82	-85	-82	-infinity	-82	-85
Io	dBm/9.36 MHz	-53.94	-52.21	-52.21	Same as parameters specified in Cell 1 columns-		
Treselection	s	0	0	0	0	0	0

SintrasearchP	dB	60			60		
Propagation Condition		AWGN					
Parameter	**Unit**	**Cell 1**			**Cell 2**		
		T1	**T2**	**T3**	**T1**	**T2**	**T3**
PDSCH RMC		SR.1.1 FDD			SR.1.1 FDD		
RMSI CORESET		CR.1.1 FDD			CR.1.1 FDD		
Dedicated CORESET		CCR.1.1 FDD			CCR.1.1 FDD		
OCNG Pattern		OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		ULBWP.0.1			ULBWP.0.1		
RLM-RS		SSB			SSB		
Qrxlevmin	dBm/SCS	-130			-130		
Pcompensation	dB	0			0		
$Qhyst_s$	dB	0			0		
$Qoffset_{s,n}$	dB	0			0		
Cell_selection_and_reselection_quality_measurement		SS-RSRP			SS-RSRP		
$\hat{E}_s / I_{ot}$	dB	16	-3.11	2.79	-infinity	2.79	-3.11
N_{oc} Note2	dBm/SCS	-98					
N_{oc} Note2	dBm/15 kHz	-98					
$\hat{E}_s / N_{oc}$	dB	16	13	16	-infinity	16	13
SS-RSRP Note3	dBm/SCS	-82	-85	-82	-infinity	-82	-85
Io	dBm/9.36 MHz	-53.94	-52.21	-52.21	Same as parameters specified in Cell 1 columns-		
Treselection	s	0	0	0	0	0	0
SintrasearchP	dB	60			60		
Propagation Condition		AWGN					

A.14.1.2.3 Test Requirements

The cell reselection delay to a newly detectable cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on Cell 2.

The cell re-selection delay to a newly detectable cell shall be less than [TBD] s.

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on cell 1.

The cell re-selection delay to an already detected cell shall be less than [TBD] s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a newly detectable cell can be expressed as: $T_{detect, NR_Intra} + T_{SI-NR}$, and to an already detected cell can be expressed as: $T_{evaluate, NR_intra} + T_{SI-NR}$,

Where:

T_{detect, NR_Intra} See Table 4.2.2.3-1 in clause 4.2C.2.3

$T_{evaluate, NR_ intra}$ See Table 4.2.2.3-1 in clause 4.2C.2.3

T_{SI-NR} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280ms is assumed in this test case provided that SIB1 and SIB19 are scheduled with 20ms period.

A.14.1.3 Time-based cell reselection to FR1 intra-frequency NR cell

A.14.1.3.1 Test Purpose and Environment

This test is to verify the requirement for the intra frequency NR cell reselection requirements for satellite access specified in clause 4.2C.2.3.

A.14.1.3.2 Test Parameters

The test scenario comprises of 1 NR carrier and 2 cells as given in tables A.14.1.a3.2-1, A.14.1.a3.2-2 and A.14.1.a3.2-3. The test consists of two successive time periods, with time duration of T1 and T2, respectively. Only cell 1 is already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2. t-Service broadcasted in SIB19 of Cell 1 is set to the time point that is 36s after start of T2.

Table A.14.1.3.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode

Table A.14.1.3.2-2: General test parameters for intra frequency NR cell re-selection test case

Parameter		Unit	Value	Comment
Initial condition	Active cell		Cell1	
T2 end condition	Active cell		Cell2	
	Neighbour cells		Cell1	
RF Channel Number			1	
Time offset between cells			3 ms	Asynchronous cells
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
DRX cycle length		s	1.28	The value shall be used for all cells in the test.
PRACH configuration index			102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			Not configured	
T1		s	>7	During T1, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed, The intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T2
T2		s	40	T2 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.14.1.3.2-3: Cell specific test parameters for intra frequency NR cell re-selection test case

Parameter	Unit	Cell 1		Cell 2	
		T1	T2	T1	T2
Satellite information		SSC.1 for GSO test SSC.2 for NGSO test		NSC.1 for GSO test NSC.2 for NGSO test	
PDSCH RMC configuration		SR.1.1 FDD		SR.1.1 FDD	
RMSI CORESET configuration		CR.1.1 FDD		CR.1.1 FDD	
Dedicated CORESET configuration		CCR.1.1 FDD		CCR.1.1 FDD	
OCNG Pattern		OP.1 defined in A.3.2.1		OP.1 defined in A.3.2.1	
Initial DL BWP configuration		DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		ULBWP.0.1		ULBWP.0.1	
SSB configuration		SSB.1 FR1		SSB.1 FR1	
SMTC configuration		#1: SMTC.1 for Cell 1 and Cell 2		#1: SMTC.1 for Cell 1 and Cell 2	
RLM-RS		SSB		SSB	
Qrxlevmin	dBm/SCS	-130		-130	
Pcompensation	dB	0		0	
$Qhyst_s$	dB	0		0	
$Qoffset_{s,n}$	dB	0		0	
Cell_selection_and_reselection_quality_measurement		SS-RSRP		SS-RSRP	
$\hat{E}_s / I_{ot}$	dB	16	-3.11	-infinity	2.79
N_{oc} Note2	dBm/SCS	-98			
N_{oc} Note2	dBm/15 kHz	-98			
$\hat{E}_s / N_{oc}$	dB	16	13	-infinity	16
SS-RSRP Note3	dBm/SCS	-82	-85	-infinity	-82
Io	dBm/9.36 MHz	-53.94	-52.21	Same as parameters specified in Cell 1 columns-	
Treselection	s	0	0	0	0
SintrasearchP	dB	40		40	
Propagation Condition		AWGN			

A.14.1.3.3 Test Requirements

The cell reselection delay to a newly detectable cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on Cell 2.

The cell re-selection delay to a newly detectable cell shall be less than [TBD] s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a newly detectable cell can be expressed as: $T_{detect, NR_Intra} + T_{SI-NR}$, and to an already detected cell can be expressed as: $T_{evaluate, NR_ intra} + T_{SI-NR}$,

Where:

T_{detect, NR_Intra} See Table 4.2C.2.3-1 in clause 4.2C.2.3

$T_{evaluate, NR_ intra}$ See Table 4.2C.2.3-1 in clause 4.2C.2.3

T_{SI-NR} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280ms is assumed in this test case provided that SIB1 and SIB19 are scheduled with 20ms period.

A.14.1.4 Location-based cell reselection to FR1 intra-frequency NR cell

A.14.1.4.1 Test Purpose and Environment

This test is to verify the requirement for the intra frequency NR cell reselection requirements for satellite access specified in clause 4.2C.2.3.

A.14.1.4.2 Test Parameters

The test scenario comprises of 1 NR carrier and 2 cells as given in tables A.14.1.a4.2-1, A.14.1.a4.2-2 and A.14.1.a4.2-3. The test consists of two successive time periods, with time duration of T1 and T2, respectively. Only cell 1 is already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2.

At 4s after the start of T2, the UE location is changed such that the distance to the reference location broadcasted in SIB19 of Cell 1 is exceeded by the configured value in *distanceThresh* plus 50m.

Table A.14.1.4.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode

Table A.14.1.4.2-2: General test parameters for intra frequency NR cell re-selection test case

Parameter		Unit	Value	Comment
Initial condition	Active cell		Cell1	
T2 end condition	Active cell		Cell2	
	Neighbour cells		Cell1	
RF Channel Number			1	
Time offset between cells			3 ms	Asynchronous cells
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
DRX cycle length		s	1.28	The value shall be used for all cells in the test.
PRACH configuration index			102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			Not configured	

T1	s	>7	During T1, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed, The intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T2
T2	s	40	T2 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.14.1.4.2-3: Cell specific test parameters for intra frequency NR cell re-selection test case

Parameter	Unit	Cell 1		Cell 2	
		T1	T2	T1	T2
Satellite information		SSC.1 for GSO test SSC.2 for NGSO test		NSC.1 for GSO test NSC.2 for NGSO test	
PDSCH RMC configuration		SR.1.1 FDD		SR.1.1 FDD	
RMSI CORESET configuration		CR.1.1 FDD		CR.1.1 FDD	
Dedicated CORESET configuration		CCR.1.1 FDD		CCR.1.1 FDD	
OCNG Pattern		OP.1 defined in A.3.2.1		OP.1 defined in A.3.2.1	
Initial DL BWP configuration		DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		ULBWP.0.1		ULBWP.0.1	
SSB configuration		SSB.1 FR1		SSB.1 FR1	
SMTC configuration		#1: SMTC.1 for Cell 1 and Cell 2		#1: SMTC.1 for Cell 1 and Cell 2	
RLM-RS		SSB		SSB	
Qrxlevmin	dBm/SCS	-130		-130	
Pcompensation	dB	0		0	
$Qhyst_s$	dB	0		0	
$Qoffset_{s,n}$	dB	0		0	
Cell_selection_and_reselection_quality_measurement		SS-RSRP		SS-RSRP	
$\hat{E}_s / I_{ot}$	dB	16	-3.11	-infinity	2.79
N_{oc} Note2	dBm/SCS	-98			
N_{oc} Note2	dBm/15 kHz	-98			
$\hat{E}_s / N_{oc}$	dB	16	13	-infinity	16
SS-RSRP Note3	dBm/SCS	-82	-85	-infinity	-82
Io	dBm/9.36 MHz	-53.94	-52.21	Same as parameters specified in Cell 1 columns-	
Treselection	s	0	0	0	0
SintrasearchP	dB	40		40	
Propagation Condition		AWGN			

A.14.1.4.3 Test Requirements

The cell reselection delay to a newly detectable cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the

RRCSetupRequest message to perform a Registration procedure for mobility and periodic registration update on Cell 2.

The cell re-selection delay to a newly detectable cell shall be less than [TBD] s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a newly detectable cell can be expressed as: $T_{detect, NR_Intra} + T_{SI-NR}$, and to an already detected cell can be expressed as: $T_{evaluate, NR_ intra} + T_{SI-NR}$,

Where:

T_{detect, NR_Intra} See Table 4.2C.2.3-1 in clause 4.2C.2.3

$T_{evaluate, NR_ intra}$ See Table 4.2C.2.3-1 in clause 4.2C.2.3

T_{SI-NR} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280ms is assumed in this test case provided that SIB1 and SIB19 are scheduled with 20ms period.

A.14.1.5 Cell reselection to FR1 inter-frequency NR case

A.14.1.5.1 Test Purpose and Environment

This test is to verify the requirement for the inter frequency NR cell reselection requirements for satellite access specified in clause 4.2C.2.4.

A.14.1.5.2 Test Parameters

The test scenario comprises of 1 NR carrier and 2 cells as given in tables A.14.1.5.2-1, A.14.1.5.2-2 and A.14.1.5.2-3. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Only cell 1 is already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2.

Table A.14.1.5.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode

Table A.14.1.5.2-2: General test parameters for inter frequency NR cell re-selection test case

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1	Cell1	
T2 end condition	Active cell		1	Cell2	
	Neighbour cells		1	Cell1	
Final condition	Active cell		1	Cell1	
	Neighbour cells		1	Cell2	
RF Channel Number			1	1	
Time offset between cells			1	3 ms	Asynchronous cells
Access Barring Information		-	1	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR1	
SMTC configuration#1			1	SMTC.2	Configured in SIB2 of Cell 1
				SMTC.6	Configured in SIB2 of Cell 2

SMTC configuration#2		1	SMTC.2	Configured in SIB2 of Cell 1
			SMTC.6	Configured in SIB2 of Cell 2
DRX cycle length	s	1	1.28	The value shall be used for all cells in the test.
PRACH configuration index		1	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell		1	Not configured	
Ephemeris information		1	[TBD]	
T1	s	1	>7	During T1, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed, The intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T2
T2	s	1	40	T2 needs to be defined so that cell re-selection reaction time is taken into account.
T3	s	1	15	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.14.1.5.2-3: Cell specific test parameters for inter frequency NR cell re-selection test case

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Satellite information		1	SSC.1 for GSO test SSC.2 for NGSO test			SSC.1 for GSO test SSC.2 for NGSO test		
PDSCH RMC configuration		1	SR.1.1 FDD			SR.1.1 FDD		
RMSI CORESET RMC configuration		1	CR.1.1 FDD			CR.1.1 FDD		
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD			CCR.1.1 FDD		
OCNG Pattern		1	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1	SSB			SSB		
Qrxlevmin	dBm/SCS	1	-130			-130		
Pcompensation	dB	1	0			0		
$Qhyst_s$	dB	1	0			0		
$Qoffset_{s,n}$	dB	1	0			0		
Cell_selection_and_reselection_quality_measurement		1	SS-RSRP			SS-RSRP		
$\hat{E}_s / I_{ot}$	dB	1	16	-3.11	2.79	-infinity	2.79	-3.11
N_{oc} Note2	dBm/SCS	1	-98					
N_{oc} Note2	dBm/15 kHz	1	-98					
$\hat{E}_s / N_{oc}$	dB	1	16	13	16	-infinity	16	13
SS-RSRP Note3	dBm/SCS	1	-82	-85	-82	-infinity	-82	-85
Io	dBm/9.36 MHz	1	-53.94	-52.21	-52.21	Same as parameters specified in Cell 1 columns-		
Treselection	s	1	0	0	0	0	0	0

SintersearchP	dB	1	60	60
Propagation Condition		1	AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.14.1.5.3 Test Requirements

The cell reselection delay to a higher priority cell is defined as the time from the beginning of time period T3, to the moment when the UE camps again on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on cell 2.

The cell re-selection delay to a higher priority cell shall be less than 68 s.

The cell reselection delay to a lower priority cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on cell 1.

The cell re-selection delay to a lower priority cell shall be less than 8 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a higher priority cell can be expressed as: $T_{higher_priority_search} + T_{evaluate,\ NR_inter} + T_{SI\text{-}NR}$, and to a lower priority cell can be expressed as: $T_{evaluate,\ NR_inter} + T_{SI\text{-}NR}$,

Where:

$T_{higher_priority_search}$ See clause 4.2.2.7

$T_{evaluate,\ NR_inter}$ See Table 4.2C.2.4-1 in clause 4.2C.2.4

$T_{SI\text{-}NR}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 67.68 s, allow 68 s for the cell re-selection delay to a higher priority

A.14.1.6 Cell reselection to FR1 inter-frequency NR cell for UE configured with [capability for enhanced requirements]

A.14.1.6.1 Test Purpose and Environment

This test is to verify the requirement for the inter frequency NR cell reselection requirements for satellite access specified in clause 4.2C.2.4.

A.14.1.6.2 Test Parameters

The test scenario comprises of 1 NR carrier and 2 cells as given in tables A.14.1.6.2-1, A.14.1.6.2-2 and A.14.1.6.2-3. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Only cell 1 is already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2.

Table A.14.1.6.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode

Table A.14.1.6.2-2: General test parameters for inter frequency NR cell re-selection test case

Parameter		Unit	Value	Comment
Initial condition	Active cell		Cell1	
T2 end condition	Active cell		Cell2	
	Neighbour cells		Cell1	
Final condition	Active cell		Cell1	
	Neighbour cells		Cell2	
RF Channel Number			1	
Time offset between cells			3 ms	Asynchronous cells
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
SSB configuration			SSB.1 FR1	
SMTC configuration#1			SMTC.2	Configured in SIB2 of Cell 1
			SMTC.6	Configured in SIB2 of Cell 2
SMTC configuration#2			SMTC.2	Configured in SIB2 of Cell 1
			SMTC.6	Configured in SIB2 of Cell 2
DRX cycle length		s	1.28	The value shall be used for all cells in the test.
PRACH configuration index			102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			Not configured	
Ephemeris information			[TBD]	
T1		s	>7	During T1, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed, The intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T2
T2		s	40	T2 needs to be defined so that cell re-selection reaction time is taken into account.
T3		s	15	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.14.1.6.2-3: Cell specific test parameters for inter frequency NR cell re-selection test case

Parameter	Unit	Cell 1			Cell 2		
		T1	T2	T3	T1	T2	T3
Satellite information		SSC.1 for GSO test SSC.2 for NGSO test			SSC.1 for GSO test SSC.2 for NGSO test		
PDSCH RMC configuration		SR.1.1 FDD			SR.1.1 FDD		
RMSI CORESET RMC configuration		CR.1.1 FDD			CR.1.1 FDD		
Dedicated CORESET RMC configuration		CCR.1.1 FDD			CCR.1.1 FDD		
OCNG Pattern		OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		

Initial DL BWP configuration		DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		ULBWP.0.1			ULBWP.0.1		
RLM-RS		SSB			SSB		
Qrxlevmin	dBm/SCS	-130			-130		
Pcompensation	dB	0			0		
$Qhyst_s$	dB	0			0		
$Qoffset_{s,n}$	dB	0			0		
Cell_selection_and_reselection_quality_measurement		SS-RSRP			SS-RSRP		
$\hat{E}_s / I_{ot}$	dB	16	-3.11	2.79	-infinity	2.79	-3.11
N_{oc} Note2	dBm/SCS	-98					
N_{oc} Note2	dBm/15 kHz	-98					
$\hat{E}_s / N_{oc}$	dB	16	13	16	-infinity	16	13
SS-RSRP Note3	dBm/SCS	-82	-85	-82	-infinity	-82	-85
Io	dBm/9.36 MHz	-53.94	-52.21	-52.21	Same as parameters specified in Cell 1 columns-		
Treselection	s	0	0	0	0	0	0
SintersearchP	dB	60			60		
Propagation Condition		AWGN					

A.14.1.6.3 Test Requirements

The cell reselection delay to a lower priority cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on cell 1.

The cell re-selection delay to a lower priority cell shall be less than 3 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a lower priority cell can be expressed as: $T_{evaluate,\ NR_inter} + T_{SI\text{-}NR}$,

Where:

$T_{evaluate,\ NR_inter}$ See Table 4.2C.2.4-1 in clause 4.2C.2.4

$T_{SI\text{-}NR}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

A.14.1.7 Time-based Cell reselection to FR1 inter-frequency NR satellite access case

A.14.1.7.1 Test Purpose and Environment

This test is to verify the requirement for the inter frequency NR cell reselection requirements for satellite access specified in clause 4.2C.2.4.

A.14.1.7.2 Test Parameters

The test scenario comprises of 1 NR carrier and 2 cells as given in tables A.14.1.7.2-1, A.14.1.7.2-2 and A.14.1.7.2-3. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Only cell 1 is already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2. t-Service broadcasted in SIB19 of Cell 1 is set to the time point that is 36s after start of T2.

Table A.14.1.7.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode

Table A.14.1.7.2-2: General test parameters for inter frequency NR cell re-selection test case

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1	Cell1	
T2 end condition	Active cell		1	Cell2	
	Neighbour cells		1	Cell1	
RF Channel Number			1	1	
Time offset between cells			1	3 ms	Asynchronous cells
Access Barring Information		-	1	Not Sent	No additional delays in random access procedure.
DRX cycle length		s	1	1.28	The value shall be used for all cells in the test.
PRACH configuration index			1	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1	Not configured	
T1		s	1	>7	During T1, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed, The intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T2
T2		s	1	40	T2 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.14.1.7.2-3: Cell specific test parameters for inter frequency NR cell re-selection test case

Parameter	Unit	Cell 1		Cell 2	
		T1	T2	T1	T2
Satellite information		SSC.1 for GSO test SSC.2 for NGSO test		NSC.1 for GSO test NSC.2 for NGSO test	
PDSCH RMC configuration		SR.1.1 FDD		SR.1.1 FDD	
RMSI CORESET configuration		CR.1.1 FDD		CR.1.1 FDD	
Dedicated CORESET configuration		CCR.1.1 FDD		CCR.1.1 FDD	
OCNG Pattern		OP.1 defined in A.3.2.1		OP.1 defined in A.3.2.1	
Initial DL BWP configuration		DLBWP.0.1		DLBWP.0.1	

Initial UL BWP configuration		ULBWP.0.1		ULBWP.0.1	
SSB configuration		SSB.1 FR1		SSB.1 FR1	
SMTC configuration		#1: SMTC.1 for Cell 1 and Cell 2		#1: SMTC.1 for Cell 1 and Cell 2	
RLM-RS		SSB		SSB	
Qrxlevmin	dBm/SCS	-130		-130	
Pcompensation	dB	0		0	
$Qhyst_s$	dB	0		0	
$Qoffset_{s,n}$	dB	0		0	
Cell_selection_and_reselection_quality_measurement		SS-RSRP		SS-RSRP	
$\hat{E}_s / I_{ot}$	dB	16	-3.11	-infinity	2.79
N_{oc} Note2	dBm/SCS	-98			
N_{oc} Note2	dBm/15 kHz	-98			
$\hat{E}_s / N_{oc}$	dB	16	13	-infinity	16
SS-RSRP Note3	dBm/SCS	-82	-85	-infinity	-82
Io	dBm/9.36 MHz	-53.94	-52.21	Same as parameters specified in Cell 1 columns-	
Treselection	s	0	0	0	0
SintersearchP	dB	40		40	
Propagation Condition		AWGN			

A.14.1.7.3 Test Requirements

The cell reselection delay to a lower priority cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on Cell 2.

The cell re-selection delay to a lower priority cell shall be less than [36] s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a lower priority cell can be expressed as: $T_{evaluate,\ NR_\ inter} + T_{SI\text{-}NR}$,

Where:

$T_{evaluate,\ NR_\ inter}$ See Table 4.2C.2.4-1 in clause 4.2C.2.4

$T_{SI\text{-}NR}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280ms is assumed in this test case provided that SIB1 and SIB19 are scheduled with 80ms period.

A.14.1.8 Location-based Cell reselection to FR1 inter-frequency NR satellite access case

A.14.1.8.1 Test Purpose and Environment

This test is to verify the requirement for the inter frequency NR cell reselection requirements for satellite access specified in clause 4.2C.2.4.

A.14.1.8.2 Test Parameters

The test scenario comprises of 1 NR carrier and 2 cells as given in tables A.14.1.8.2-1, A.14.1.8.2-2 and A.14.1.8.2-3. The test consists of two successive time periods, with time duration of T1and T2, respectively. Only cell 1 is already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2.At 4s after the start of T2, the UE location is changed such that the distance to the reference location broadcasted in SIB19 of Cell 1 is exceeded by the configured value in *distanceThresh* plus 50m.

Table A.14.1.8.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode

Table A.14.1.8.2-2: General test parameters for inter frequency NR cell re-selection test case

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1	Cell1	
T2 end condition	Active cell		1	Cell2	
	Neighbour cells		1	Cell1	
RF Channel Number			1	1	
Time offset between cells			1	3 ms	Asynchronous cells
Access Barring Information		-	1	Not Sent	No additional delays in random access procedure.
DRX cycle length		s	1	1.28	The value shall be used for all cells in the test.
PRACH configuration index			1	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1	Not configured	
T1		s	1	>7	During T1, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed, The intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T2
T2		s	1	40	T2 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.14.1.8.2-3: Cell specific test parameters for inter frequency NR cell re-selection test case

Parameter	Unit	Cell 1		Cell 2	
		T1	T2	T1	T2
Satellite information		SSC.1 for GSO test SSC.2 for NGSO test		NSC.1 for GSO test NSC.2 for NGSO test	
PDSCH RMC configuration		SR.1.1 FDD		SR.1.1 FDD	
RMSI CORESET configuration		CR.1.1 FDD		CR.1.1 FDD	
Dedicated CORESET configuration		CCR.1.1 FDD		CCR.1.1 FDD	

OCNG Pattern		OP.1 defined in A.3.2.1		OP.1 defined in A.3.2.1	
Initial DL BWP configuration		DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		ULBWP.0.1		ULBWP.0.1	
SSB configuration		SSB.1 FR1		SSB.1 FR1	
SMTC configuration		#1: SMTC.1 for Cell 1 and Cell 2		#1: SMTC.1 for Cell 1 and Cell 2	
RLM-RS		SSB		SSB	
Qrxlevmin	dBm/SCS	-130		-130	
Pcompensation	dB	0		0	
$Qhyst_s$	dB	0		0	
$Qoffset_{s,n}$	dB	0		0	
Cell_selection_and_reselection_quality_measurement		SS-RSRP		SS-RSRP	
$\hat{E}_s / I_{ot}$	dB	16	-3.11	-infinity	2.79
N_{oc} Note2	dBm/SCS	-98			
N_{oc} Note2	dBm/15 kHz	-98			
$\hat{E}_s / N_{oc}$	dB	16	13	-infinity	16
SS-RSRP Note3	dBm/SCS	-82	-85	-infinity	-82
Io	dBm/9.36 MHz	-53.94	-52.21	Same as parameters specified in Cell 1 columns-	
Treselection	s	0	0	0	0
SintersearchP	dB	40		40	
Propagation Condition		AWGN			

A.14.1.8.3 Test Requirements

The cell reselection delay to a lower priority cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on Cell 2.

The cell re-selection delay to a lower priority cell shall be less than [36] s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a lower priority cell can be expressed as: $T_{evaluate,\ NR_\ inter} + T_{SI\text{-}NR}$,

Where:

$T_{evaluate,\ NR_\ inter}$ See Table 4.2C.2.4-1 in clause 4.2C.2.4

$T_{SI\text{-}NR}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280ms is assumed in this test case provided that SIB1 and SIB19 are scheduled with 80ms period.

A.14.1.9 Cell reselection to FR1 inter-frequency NR case for UE fulfilling low mobility relaxed measurement criterion

A.14.1.9.1 Test Purpose and Environment

This test is to verify the requirement for the inter frequency NR cell reselection requirements specified in clause 4.2C.2.7, for UE fulfilling low mobility relaxed measurement criterion.

A.14.1.9.2 Test Parameters

The test scenario comprises of 2 cells on 2 different NR carriers respectively as given in tables A.14.1.9.2-1, A.14.1.9.2-2 and A.14.1.9.2-3. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas and cell 2 is of higher priority than cell 1.

As specified in the Test Purpose, the UE is configured with the relaxed measurement criterion for UE with low mobility defined in clause [5.2.4.9.1] in [1]. So, Cell 2 and Cell 1 configure the UE as follows:

[lowMobilityEvalutation] [2] criterion is configured according to the parameters listed in Table A.14.1.9.2-3;

[cellEdgeEvaluation] [2] criterion is not configured;

[combineRelaxedMeasCondition] [2] is not configured;

Table A.14.1.9.2-1: Supported test configurations

Configuration	Description of serving cell
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode

Table A.14.1.9.2-2: General test parameters for FR1 inter frequency NR cell re-selection test case for UE fulfilling low mobility criterion

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1	Cell2	The UE camps on cell 2 in the initial phase, it fulfills Low Mobility relaxation measurements criterion, and during T1 period the UE reselects to cell 1
	Neighbour cells		1	Cell1	
T1 end condition	Active cell		1	Cell1	The UE shall perform reselection to cell 1 during T1
	Neighbour cells		1	Cell2	
T2 end condition	Active cell		1	Cell2	The UE shall perform reselection to cell 2 with higher priority during T2
	Neighbour cells		1	Cell1	
RF Channel Number			1	1, 2	
Time offset between cells			1	3 ms	Asynchronous cells
Access Barring Information		-	1	Not Sent	No additional delays in random access procedure.
SSB Configuration			1	SSB.1 FR1	
SMTC configuration			1	SMTC pattern 2	Configured in SIB4 of Cell 1
				SMTC pattern 6	Configured in SIB4 of Cell 2
DRX cycle length		s	1	0.64	The value shall be used for all cells in the test.
PRACH configuration index			1	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1	Not configured	

T1	s	1	25 s	T1 is defined so that cell re-selection reaction time is taken into account.
T2	s	1	25 s	T2 is defined so that cell re-selection reaction time is taken into account.

Table A.14.1.9.2-3: Cell specific test parameters for FR1 inter frequency NR cell re-selection test case in AWGN for UE fulfilling low mobility criterion

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
Satellite information		1	SSC.1 for GSO test SSC.2 for NGSO test		NSC.1 for GSO test NSC.2 for NGSO test	
PDSCH RMC configuration		1	SR.1.1 FDD		SR.1.1 FDD	
RMSI CORESET RMC configuration		1	CR.1.1 FDD		CR.1.1 FDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		CCR.1.1 FDD	
OCNG Pattern		1	OP.1 defined in A.3.2.1		OP.1 defined in A.3.2.1	
Initial DL BWP configuration		1	DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		1	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1	SSB		SSB	
Qrxlevmin	dBm/SCS	1	-140		-140	
Pcompensation	dB	1	0		0	
$Qhyst_s$	dB	1	0		0	
$Qoffset_{s,n}$	dB	1	0		0	
Cell_selection_and_reselection_quality_measurement		1	SS-RSRP		SS-RSRP	
$\hat{E}_s / I_{ot}$	dB	1	14	14	-4	12
N_{oc} Note2	dBm/SCS	1	-98			
N_{oc} Note2	dBm/15 kHz	1	-98			
$\hat{E}_s / N_{oc}$	dB	1	14	14	-4	12
SS-RSRP Note3	dBm/SCS	1	-84	-84	-102	-86
Io	dBm/9.36 MHz	1	-55.88	-55.88	-68.60	-57.78
Treselection	s	1	0	0	0	0
SnonintersearchP	dB	1	Not sent		Not sent	
$Thresh_{x,highP}$	dB	1	48		48	
$Thresh_{serving,lowP}$	dB	1	44		44	
$Thresh_{x,lowP}$	dB	1	50		50	
$S_{SearchDeltaP}$	dB	1	3		3	
$T_{SearchDeltaP}$	s	1	5		5	
Propagation Condition		1	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.14.1.9.3 Test Requirements

The cell reselection delay to an already detected lower priority cell for UE fulfilling low mobility relaxed measurements is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 1.

The cell re-selection delay to a lower priority cell for UE fulfilling low mobility relaxed measurements shall be less than 17s.

The cell reselection delay to an already detected higher priority cell for UE fulfilling low mobility relaxed measurements is defined as the time from the beginning of time period T2, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the RRCSetupRequest message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to an already detected higher priority cell for UE fulfilling low mobility relaxed measurements shall be less than 17s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a known lower priority cell can be expressed as: $T_{evaluate, NR_ inter} + T_{SI-NR}$,

Where:

$T_{evaluate, NR_ inter}$ See Table 4.2.2.10.2-1 in clause 4.2.2.10.2

T_{SI-NR} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 16.64s, allow 17s for the cell re-selection delay to an already detected lower priority cell and 16.64s for the cell re-selection delay to an already detected higher priority cell, which we allow 17s for UE fulfilling low mobility relaxed measurements in the test case.

A.14.1.10 Cell reselection to FR1 inter-frequency NR case for UE fulfilling not-at-cell edge relaxed measurement criterion

A.14.1.10.1 Test Purpose and Environment

This test is to verify the requirement for the inter frequency NR cell reselection requirements specified in clause 4.2C.2.7, for UE fulfilling not-at-cell edge relaxed measurement criterion.

A.14.1.10.2 Test Parameters

The test scenario comprises of 2 cells on 2 different NR carriers respectively as given in tables A.14.1.10.2-1, A.14.1.10.2-2 and A.14.1.10.2-3. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas and cell 2 is of higher priority than cell 1.

As specified in the Test Purpose, the UE is configured with the relaxed measurement criterion for UE not-at-cell edge as defined in clause 5.2.4.9.2 in [1]. So, Cell 2 and Cell 1configures the UE as follows:

[cellEdgeEvaluation] [2] criterion is configured according to the parameters listed in Table A.14.1.9.2-3;

[lowMobilityEvalutation] [2] criterion is not configured;

[combineRelaxedMeasCondition] [2] is not configured;

Table A.14.1.10.2-1: Supported test configurations

Configuration	Description of serving cell
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode

Table A.14.1.10.2-2: General test parameters for FR1 inter frequency NR cell re-selection test case for UE fulfilling not-at-cell edge criterion

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1	Cell2	The UE camps on cell 2 in the initial phase, it fulfills Not-at-cell edge relaxation measurements criterion, and during T1 period the UE reselects to cell 1
	Neighbour cells		1	Cell1	
T1 end condition	Active cell		1	Cell1	The UE shall perform reselection to cell 1 during T1
	Neighbour cells		1	Cell2	
T2 end condition	Active cell		1	Cell2	The UE shall perform reselection to cell 2 with higher priority during T2
	Neighbour cells		1	Cell1	
RF Channel Number			1	1, 2	
Time offset between cells			1	3 ms	Asynchronous cells
Access Barring Information		-	1	Not Sent	No additional delays in random access procedure.
SSB Configuration			1	SSB.1 FR1	
SMTC configuration			1	SMTC pattern 2	Configured in SIB4 of Cell 1
				SMTC pattern 6	Configured in SIB4 of Cell 2
DRX cycle length		s	1	0.64	The value shall be used for all cells in the test.
PRACH configuration index			1	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1	Not configured	
T1		s	1	20 s	T1 is defined so that cell re-selection reaction time is taken into account.
T2		s	1	20 s	T2 is defined so that cell re-selection reaction time is taken into account.

Table A.14.1.10.2-3: Cell specific test parameters for FR1 inter frequency NR cell re-selection test case in AWGN for UE fulfilling not-at-cell edge criterion

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
Satellite information		1	SSC.1 for GSO test SSC.2 for NGSO test		NSC.1 for GSO test NSC.2 for NGSO test	
PDSCH RMC configuration		1	SR.1.1 FDD		SR.1.1 FDD	
RMSI CORESET RMC configuration		1	CR.1.1 FDD		CR.1.1 FDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		CCR.1.1 FDD	
OCNG Pattern		1	OP.1 defined in A.3.2.1		OP.1 defined in A.3.2.1	
Initial DL BWP configuration		1	DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		1	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1	SSB		SSB	
Qrxlevmin	dBm/SCS	1	-140		-140	
Pcompensation	dB	1	0		0	
$Qhyst_s$	dB	1	0		0	
$Qoffset_{s,n}$	dB	1	0		0	
Cell_selection_and_reselection_quality_measurement		1	SS-RSRP		SS-RSRP	
$\hat{E}_s / I_{ot}$	dB	1	14	14	-4	12
N_{oc} Note2	dBm/SCS	1	-98			
N_{oc} Note2	dBm/15 kHz	1	-98			
$\hat{E}_s / N_{oc}$	dB	1	14	14	-4	12
SS-RSRP Note3	dBm/SCS	1	-84	-84	-102	-86
Io	dBm/9.36 MHz	1	-55.88	-55.88	-68.60	-57.78
Treselection	s	1	0	0	0	0
SnonintersearchP	dB	1	Not sent		Not sent	
$Thresh_{x,highP}$	dB	1	48		48	
$Thresh_{serving,lowP}$	dB	1	44		44	
$Thresh_{x,lowP}$	dB	1	50		50	
$S_{SearchThresholdP}$	dB	1	50		50	
$S_{SearchThresholdQ}$	s	1	Not Configured			
Propagation Condition		1	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.14.1.10.3 Test Requirements

The cell reselection delay to an already detected lower priority cell for UE fulfilling not-at-cell edge relaxed measurements is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 1.

The cell re-selection delay to an already detected lower priority cell for UE fulfilling not-at-cell edge relaxed measurements shall be less than 17s.

The cell reselection delay to an already detected higher priority cell for UE fulfilling not-at-cell-edge relaxed measurements is defined as the time from the beginning of time period T2, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the RRCSetupRequest message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to an already detected higher priority cell for UE fulfilling not-at-cell-edge relaxed measurements shall be less than 17s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a lower priority cell can be expressed as: $T_{evaluate, NR_ inter} + T_{SI-NR}$,

Where:

$T_{evaluate, NR_ inter}$ See Table 4.2.2.10.3-1 in clause 4.2.2.10

T_{SI-NR} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 16.64s, allow 17s for the cell re-selection delay to an already detected lower priority cell and 16.64s for the cell re-selection delay to an already higher priority cell, which we allow 17s for UE fulfilling not-at-cell edge relaxed measurements in the test case.

A.14.2 RRC_CONNECTED state mobility

A.14.2.1 Handover

A.14.2.1.1 Intra-frequency SAN Handover from FR1 to FR1

A.14.2.1.1.1 Test Purpose and Environment

This test is to verify the requirement for Intra-frequency SAN Handover from FR1 to FR1 specified in clause 6.1C.1.

A.14.2.1.1.2 Test Parameters

The test scenario comprises of 1 NR FDD carrier and 2 cells as given in table A.14.2.1.1.2-1, A.14.2.1.1.2-2, and A.14.2.1.1.2-3. Both handover delay and interruption length are tested.

The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE may not have any timing information of cell 2. During T1, the UE is configured to measure intra-frequency neighbour cell with Event A3 report.

Starting T2, cell 2 becomes detectable and offset better than cell 1. The RRC message implying handover to cell 2 shall be sent to the UE during period T2, after the UE has reported Event A3. The start of T3 is defined as the end of the last TTI containing the RRC message implying handover.

Table A.14.2.1.1.2-1: Supported test configurations

Configuration	Description
1	GSO, NR FDD, 15kHz SSB SCS, 10 MHz BW
2	NGSO, NR FDD, 15kHz SSB SCS, 10 MHz BW
Note: If UE supports both NGSO and GSO, the GSO-based test cases can be skipped if the UE passes NGSO-based test cases.	

Table A.14.2.1.1.2-2: General test parameters Intra-frequency SAN handover from FR1 to FR1

Parameter		Unit	Value	Comment
RF Channel Number			1	One NR NTN satellite RF channel
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
Satellite configuration	Config 1		RMC in [A.x]	For GSO satellites configuration
	Config 2		RMC in [A.x]	For NGSO satellites configuration
UE position (N,S, H)			[(0, 0, 0)]	Set by AT command
A3-Offset		dB	0	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	≤5	
T3		S	1	

Table A.14.2.1.1.2-3: Cell specific test parameters for Intra frequency SAN handover test case

Parameter		Test configuration	Unit	Cell 1			Cell 2		
				T1	T2	T3	T1	T2	T3
NR RF Channel Number		Config 1,2		1			1		
$BW_{channel}$			MHz	10: $N_{RB,c}$ = 52			10: $N_{RB,c}$ = 52		
BWP BW			MHz	10: $N_{RB,c}$ = 52			10: $N_{RB,c}$ = 52		
TA_{Common}		Config 1,2	s	0			0		
$TA_{CommonDrift}$			s	0			0		
$TA_{CommonDriftVariation}$			s	0			0		
K_{offset}		Config 1	ms	[239]			[239]		
		Config 2		[4]			[4]		
K_{mac}		Config 1,2	ms	0			0		
DRx Cycle			ms	Not Applicable					
PDSCH Reference measurement channel				SR.1.1 FDD					
CORESET Reference Channel				CR.1.1 FDD					
TRS configuration				TRS.1.1 FDD					
OCNG Patterns				OP.1					
SMTC Configuration				SMTC.1					
SSB Configuration				SSB.1 FR1					
PDSCH/PDCCH subcarrier spacing			kHz	15 kHz					
PUCCH/PUSCH subcarrier spacing			kHz	15 kHz					
PRACH configuration				FR1 PRACH configuration 1					
BWP configuration	Initial DL BWP	Config 1,2		DLBWP.0.1					
	Dedicated DL BWP			DLBWP.1.1					
	Initial UL BWP			ULBWP.0.1					
	Dedicated UL BWP			ULBWP.1.1					
EPRE ratio of PSS to SSS		Config 1,2	dB	0					
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									

EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} Note2	Config 1,2	dBm/ 15kHz	-98					
N_{oc} Note2		dBm/ SCS	-98					
$\hat{E}_s / I_{ot}$		dB	8	-3.3	-3.3	-Infinity	2.36	2.36
$\hat{E}_s / N_{oc}$		dB	8	8	8	-Infinity	11	11
SSB_RP		dBm/ SCS	-90	-90	-90	-Infinity	-87	-87
Io Note3		dBm/ 9.36MHz	-61.41	-57.06	-57.06	-61.41	-57.06	-57.06
Propagation condition		-	AWGN			AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.14.2.1.1.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 72 ms from the beginning of time period T3.
The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2]. $T_{interrupt}$ is defined in clause 6.1C.1.2.2.

$$T_{interrupt} = T_{search} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin}\ \text{ms}$$

Here: $T_{search} = 0$; $T_{IU} = 20$ms; $T_{processing} = 20$ms; $T_{\Delta} = 20$ms; $T_{margin} = 2$ms.

This gives a total of 72 ms.

A.14.2.1.2 Inter-frequency SAN Handover from FR1 to FR1

A.14.2.1.2.1 Test Purpose and Environment

This test is to verify the requirement for Inter-frequency SAN Handover from FR1 to FR1 specified in clause 6.1C.1.

A.14.2.1.2.2 Test Parameters

The test scenario comprises of 2 NR FDD carriers and one cell on each carrier as given in table A.14.2.1.2.2-1, A.14.2.1.2.2-2 and A.14.2.1.2.2-3. Both handover delay and interruption length are tested.

The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE may not have any timing information of cell 2. During T1, the UE is configured to measure inter frequency meighboure cell with Event A3 report and a gap patterns are configured in the test case.

Starting T2, cell 2 becomes detectable and offset better than cell 1. The RRC message implying handover to cell 2 shall be sent to the UE during period T2, after the UE has reported Event A3. The start of T3 is defined as the end of the last TTI containing the RRC message implying handover.

Table A.14.2.1.2.2-1: Supported test configurations

Configuration	Description
1	GSO, NR FDD, 15kHz SSB SCS, 10 MHz BW
2	NGSO, NR FDD, 15kHz SSB SCS, 10 MHz BW
Note: If UE supports both NGSO and GSO, the GSO-based test cases can be skipped if the UE passes NGSO-based test cases.	

Table A.14.2.1.2.2-2: General test parameters Inter-frequency SAN handover from FR1 to FR1

Parameter		Unit	Value	Comment
RF Channel Number			1, 2	Two NR NTN satellite RF channel
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
Satellite configuration	Config 1		RMC in [A.x]	For GSO satellite configuration
	Config 2		RMC in [A.x]	For NGSO satellite configuration
UE position (N,S, H)			[(0, 0, 0)]	Set by AT command
A3-Offset		dB	0	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	≤5	
T3		s	1	

Table A.14.2.1.2.2-3: Cell specific test parameters for Inter frequency SAN handover test case

Parameter	Test configuration	Unit	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
NR RF Channel Number	Config 1,2		1			2		
$BW_{channel}$		MHz	10: $N_{RB,c}$ = 52			10: $N_{RB,c}$ = 52		
BWP BW		MHz	10: $N_{RB,c}$ = 52			10: $N_{RB,c}$ = 52		
TA_{Common}	Config 1,2	s	0			0		
$TA_{CommonDrift}$		s	0			0		
$TA_{CommonDriftVariation}$		s	0			0		
K_{offset}	Config 1	ms	[239]			[239]		
	Config 2		[4]			[4]		
K_{mac}	Config 1,2	ms	0			0		
DRx Cycle		ms	Not Applicable					

PDSCH Reference measurement channel				SR.1.1 FDD					
CORESET Reference Channel				CR.1.1 FDD					
TRS configuration				TRS.1.1 FDD					
OCNG Patterns				OP.1					
SMTC Configuration				SMTC.1					
SSB Configuration				SSB.1 FR1					
PDSCH/PDCCH subcarrier spacing			kHz	15 kHz					
PUCCH/PUSCH subcarrier spacing			kHz	15 kHz					
PRACH configuration				FR1 PRACH configuration 1					
BWP configuration	Initial DL BWP	Config 1,2		DLBWP.0.1					
	Dedicated DL BWP			DLBWP.1.1					
	Initial UL BWP			ULBWP.0.1					
	Dedicated UL BWP			ULBWP.1.1					
EPRE ratio of PSS to SSS		Config 1,2	dB	0					
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2		Config 1,2	dBm/ 15kHz	-98					
N_{oc} Note2			dBm/ SCS	-98					
$\hat{E}_s / I_{ot}$			dB	4	4	4	-Infinity	9	9
$\hat{E}_s / N_{oc}$			dB	4	4	4	-Infinity	9	9
SSB_RP			dBm/ SCS	-94	-94	-94	-Infinity	-89	-89
Io Note3			dBm/ 9.36MHz	-64.59	-64.59	-64.59	-70.05	-60.53	-60.53
Propagation condition			-	AWGN			AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.14.2.1.2.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 72 ms from the beginning of time period T3.
The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2]. $T_{interrupt}$ is defined in clause 6.1C.1.2.2.

$$T_{interrupt} = T_{search} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin}\ ms$$

Here: T_{search} = 0; T_{IU} = 20ms; $T_{processing}$ = 20ms; T_{Δ} = 20ms; T_{margin} = 2ms.

This gives a total of 72 ms.

A.14.2.1.3 Intra-frequency SAN time-based conditional Handover from FR1 to FR1

A.14.2.1.3.1 Test Purpose and Environment

This test is to verify the requirement for intra-frequency SAN time-based conditional handover from FR1 to FR1 specified in clause 6.1C.2.

A.14.2.1.3.2 Test Parameters

The test scenario comprises of 1 NR FDD carrier and 2 cells as given in table A.14.2.1.3.2-1, and A.14.2.1.3.2-2. Both handover delay and interruption length are tested.

The test consists of two successive time periods, with time durations of T1 and T2 respectively. At the start of time duration T1, the UE may not have any timing information of cell 2. During T1, the UE is configured to measure intra-frequency neighbour cell. The RRC message implying time-based handover to cell 2 with Event CondEvent T1 shall be sent to UE, at a time earlier than T_{RRC} (10ms) before the beginning of T2.

Starting T2, cell 2 becomes detectable and offset better than cell 1 and time condition event t1-Threshold-r17 is fulfilled.

Table A.14.2.1.3.2-1: Supported test configurations

Configuration	Description
1	GSO, NR FDD, 15kHz SSB SCS, 10 MHz BW
2	NGSO, NR FDD, 15kHz SSB SCS, 10 MHz BW
Note: If UE supports both NGSO and GSO, the GSO-based test cases can be skipped if the UE passes NGSO-based test cases.	

Table A.14.2.1.3.2-2: General test parameters for Intra-frequency SAN time-based conditional handover from FR1 to FR1

Parameter		Unit	Value	Comment
RF Channel Number			1	One NR NTN satellite RF channel
Initial conditions	Active cell		Cell 1	FDD duplex mode cell
	Neighbouring cell		Cell 2	FDD duplex mode cell
Final condition	Active cell		Cell 2	
Satellite configuration	Config 1		RMC in [A.x]	For GSO satellite configuration
	Config 2		RMC in [A.x]	For NGSO satellite configuration
UE position (N,S, H)			[(0, 0, 0)]	Set by AT command
t1-Threshold-r17.condEventT1-r17		s	T2	Entering condition
duration-r17.condEventT1-r17		slot	1000	Give 1s search duration
A3-Offset in condition		dB	0	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.

Time offset between cells		3 μs	Synchronous cells
T1	s	5	
T2	s	≤ 2	

Table A.14.2.1.3.2-3: Cell specific test parameters for Intra-frequency SAN time-based conditional handover from FR1 to FR1

Parameter		Test configuration	Unit	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number		Config 1,2		1		1	
$BW_{channel}$			MHz	10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
BWP BW			MHz	10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
TA_{Common}		Config 1,2	s	0		0	
$TA_{CommonDrift}$			s	0		0	
$TA_{CommonDriftVariation}$			s	0		0	
K_{offset}		Config 1	ms	[239]		[239]	
		Config 2	ms	[4]		[4]	
K_{mac}		Config 1,2	ms	0		0	
DRX Cycle			ms	Not Applicable			
PDSCH Reference measurement channel				SR.1.1 FDD			
CORESET Reference Channel				CR.1.1 FDD			
TRS configuration				TRS.1.1 FDD			
OCNG Patterns				OP.1			
SMTC Configuration				SMTC.1			
SSB Configuration				SSB.1 FR1			
PDSCH/PDCCH subcarrier spacing			kHz	15 kHz			
PUCCH/PUSCH subcarrier spacing			kHz	15 kHz			
PRACH configuration				FR1 PRACH configuration 1			
BWP configuration	Initial DL BWP	Config 1,2		DLBWP.0.1			
	Dedicated DL BWP			DLBWP.1.1			
	Initial UL BWP			ULBWP.0.1			
	Dedicated UL BWP			ULBWP.1.1			
EPRE ratio of PSS to SSS		Config 1,2	dB	0			
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		Config 1,2	dBm/ 15kHz	-98			
N_{oc} Note2			dBm/ SCS	-98			
$\hat{E}_s / I_{ot}$			dB	8	-3.3	-Infinity	2.36
$\hat{E}_s / N_{oc}$			dB	8	8	-Infinity	11
SSB_RP			dBm/ SCS	-90	-90	-Infinity	-87
Io Note3			dBm/ 9.36MHz	-61.41	-57.06	-61.41	-57.06
Propagation condition			-	AWGN			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							

Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.14.2.1.3.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 872 ms from the beginning of time period T2.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay is defined in clause 6.1C.2, can be expressed as:

$$D_{CHO} = T_{RRC} + T_{Event_DU} + T_{measure} + T_{interrupt} + T_{CHO_execution}$$

where:

RRC procedure delay T_{RRC} = 10 ms and is specified in clause 12 in TS 38.331 [2].

T_{Event_DU} = start of T2

$T_{measure}$ = 600 + 200 ms; $T_{interrupt}$ = 62ms; $T_{CHO_execution}$ = 10ms.

This gives a total of 872 ms.

A.14.2.1.4 Inter-frequency SAN time-based conditional Handover from FR1 to FR1

A.14.2.1.4.1 Test Purpose and Environment

This test is to verify the requirement for inter -frequency SAN time-based conditional handover from FR1 to FR1 specified in clause 6.1C.2.

A.14.2.1.4.2 Test Parameters

The test scenario comprises of 2 NR FDD carrier and one cell on each carrier as given in table A.14.2.1.4.2-1, and A.14.2.1.4.2-2. Both handover delay and interruption length are tested.

The test consists of two successive time periods, with time durations of T1 and T2 respectively. At the start of time duration T1, the UE may not have any timing information of cell 2. During T1, the UE is configured to measure inter-frequency neighbour cell and Gap pattern ID gp0. The RRC message implying time-based handover to cell 2 with Event CondEvent T1 shall be sent to UE, at a time earlier than T_{RRC} (10ms) before the beginning of T2.

Starting T2, cell 2 becomes detectable and offset better than cell 1 and after 1000ms of T2, time condition event t1-Threshold-r17 is fulfilled.

Table A.14.2.1.4.2-1: Supported test configurations

Configuration	Description
1	GSO, NR FDD, 15kHz SSB SCS, 10 MHz BW
2	NGSO, NR FDD, 15kHz SSB SCS, 10 MHz BW
Note: If UE supports both NGSO and GSO, the GSO-based test cases can be skipped if the UE passes NGSO-based test cases.	

Table A.14.2.1.4.2-2: General test parameters for Inter-frequency SAN time-based conditional handover from FR1 to FR1

Parameter		Unit	Value	Comment
RF Channel Number			1, 2	Two NR NTN satellite RF channel
Initial conditions	Active cell		Cell 1	FDD duplex mode cell
	Neighbouring cell		Cell 2	FDD duplex mode cell
Final condition	Active cell		Cell 2	
Satellite configuration	Config 1		RMC in [A.x]	For GSO satellite configuration
	Config 2		RMC in [A.x]	For NGSO satellite configuration
UE position (N,S, H)			[(0, 0, 0)]	Set by AT command
t1-Threshold-r17.condEventT1-r17		s	T2	Entering condition
duration-r17.condEventT1-r17		slot	1000	Give 1s search duration
A3-Offset in condition		dB	0	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	≤ 2	

Table A.14.2.1.4.2-3: Cell specific test parameters for Inter-frequency SAN time-based conditional handover from FR1 to FR1

Parameter		Test configuration	Unit	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number		Config 1, 2		1		2	
$BW_{channel}$			MHz	10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
BWP BW			MHz	10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
TA_{Common}		Config 1, 2	s	0		0	
$TA_{CommonDrift}$			s	0		0	
$TA_{CommonDriftVariation}$			s	0		0	
K_{offset}		Config 1	ms	[239]		[239]	
		Config 2	ms	[4]		[4]	
K_{mac}		Config 1, 2	ms	0		0	
DRX Cycle			ms	Not Applicable			
PDSCH Reference measurement channel				SR.1.1 FDD			
CORESET Reference Channel				CR.1.1 FDD			
TRS configuration				TRS.1.1 FDD			
OCNG Patterns				OP.1			
SMTC Configuration				SMTC.1			
SSB Configuration				SSB.1 FR1			
PDSCH/PDCCH subcarrier spacing			kHz	15 kHz			
PUCCH/PUSCH subcarrier spacing			kHz	15 kHz			
PRACH configuration				FR1 PRACH configuration 1			
BWP configuration	Initial DL BWP	Config 1, 2		DLBWP.0.1			
	Dedicated DL BWP			DLBWP.1.1			
	Initial UL BWP			ULBWP.0.1			
	Dedicated UL BWP			ULBWP.1.1			
EPRE ratio of PSS to SSS		Config 1, 2	dB	0			
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							

EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	Config 1, 2	dBm/ 15kHz	-98			
N_{oc} Note2		dBm/ SCS	-98			
$\hat{E}_s / I_{ot}$		dB	4	4	-Infinity	9
$\hat{E}_s / N_{oc}$		dB	4	4	-Infinity	9
SSB_RP		dBm/ SCS	-94	-94	-Infinity	-89
Io Note3		dBm/ 9.36MHz	-64.59	-64.59	-70.05	-60.53
Propagation condition		-	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.14.2.1.4.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 l later than 1000ms and ess than 1072 ms from the beginning of time period T2.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay is defined in clause 6.1C.2, can be expressed as:

$$D_{CHO} = T_{RRC} + T_{Event_DU} + T_{measure} + T_{interrupt} + T_{CHO_execution}$$

where:

RRC procedure delay T_{RRC} = 10 ms and is specified in clause 12 in TS 38.331 [2].

T_{Event_DU} = start of T2

$T_{measure}$ = max(600 + 200, 1000) ms; $T_{interrupt}$ = 62ms; $T_{CHO_execution}$ = 10ms.

This gives a total of 1072 ms.

A.14.2.1.5 Intra-frequency SAN distance-based conditional Handover from FR1 to FR1

A.14.2.1.5.1 Test Purpose and Environment

This test is to verify the requirement for intra-frequency SAN distance-based conditional handover from FR1 to FR1 specified in clause 6.1C.2.

A.14.2.1.5.2 Test Parameters

The test scenario comprises of 1 NR FDD carrier and 2 cells as given in table A.14.2.1.5.2-1, and A.14.2.1.5.2-2. Both handover delay and interruption length are tested.

The test consists of two successive time periods, with time durations of T1 and T2 respectively. At the start of time duration T1, the UE may not have any timing information of cell 2. During T1, the UE is configured to measure intra-frequency neighbour cell. The RRC message implying distance-based handover to cell 2 with Event D1 shall be sent to UE, at a time earlier than T_{RRC} (10ms) before the beginning of T2.

Starting T2, cell 2 becomes detectable and offset better than cell 1 and location condition event condEventD1-r17 is fulfilled.

Table A.14.2.1.5.2-1: Supported test configurations

Configuration	Description
1	GSO, NR FDD, 15kHz SSB SCS, 10 MHz BW
2	NGSO, NR FDD, 15kHz SSB SCS, 10 MHz BW
Note: If UE supports both NGSO and GSO, the GSO-based test cases can be skipped if the UE passes NGSO-based test cases.	

Table A.14.2.1.5.2-2: General test parameters for Intra-frequency SAN distance-based conditional handover from FR1 to FR1

Parameter		Unit	Value	Comment
RF Channel Number			1	One NR NTN satellite RF channel
Initial conditions	Active cell		Cell 1	FDD duplex mode cell
	Neighbouring cell		Cell 2	FDD duplex mode cell
Final condition	Active cell		Cell 2	
Satellite configuration	Config 1		RMC in [A.x]	For GSO satellite configuration
	Config 2		RMC in [A.x]	For NGSO satellite configuration
UE position (N,S, H) at T1 start			[(0, 0, 0)]	Set by AT command
UE moving speed		km/h	[(108, 0, 0)]	Set by AT command
referenceLocation1-r17.condEventD1-r17		m	[(-700, 0, 0)]	Reference location for serving cell
referenceLocation2-r17.condEventD1-r17		m	[(1300, 0, 0)]	Reference location for target cell
distanceThreshFromReference1-r17.condEventD1-r17		50m	[20]	D1-1 Location condition is fulfilled at T2
distanceThreshFromReference2-r17.condEventD1-r17		50m	[20]	D1-2 Location condition is fulfilled at T2
hysteresis-r17.condEventD1-r17		10m	0	
timeToTrigger-r17.condEventD1-r17		s	0	
A3-Offset in condition		dB	0	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	12	
T2		s	≤ 6	

Table A.14.2.1.5.2-3: Cell specific test parameters for Intra-frequency SAN distance-based conditional handover from FR1 to FR1

Parameter	Test configuration	Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number	Config 1, 2		1		1	

$BW_{channel}$			MHz	10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
BWP BW			MHz	10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
TA_{Common}		Config 1, 2	s	0		0	
$TA_{CommonDrift}$			s	0		0	
$TA_{CommonDriftVariation}$			s	0		0	
K_{offset}		Config 1	ms	[239]		[239]	
		Config 2	ms	[4]		[4]	
K_{mac}		Config 1, 2	ms	0		0	
DRX Cycle			ms	Not Applicable			
PDSCH Reference measurement channel				SR.1.1 FDD			
CORESET Reference Channel				CR.1.1 FDD			
TRS configuration				TRS.1.1 FDD			
OCNG Patterns				OP.1			
SMTC Configuration				SMTC.1			
SSB Configuration				SSB.1 FR1			
PDSCH/PDCCH subcarrier spacing			kHz	15 kHz			
PUCCH/PUSCH subcarrier spacing			kHz	15 kHz			
PRACH configuration				FR1 PRACH configuration 1			
BWP configuration	Initial DL BWP	Config 1, 2		DLBWP.0.1			
	Dedicated DL BWP			DLBWP.1.1			
	Initial UL BWP			ULBWP.0.1			
	Dedicated UL BWP			ULBWP.1.1			
EPRE ratio of PSS to SSS		Config 1, 2	dB	0			
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		Config 1, 2	dBm/ 15kHz	-98			
N_{oc} Note2			dBm/ SCS	-98			
$\hat{E}_s / I_{ot}$			dB	8	-3.3	-Infinity	2.36
$\hat{E}_s / N_{oc}$			dB	8	8	-Infinity	11
SSB_RP			dBm/ SCS	-90	-90	-Infinity	-87
Io Note3			dBm/ 9.36MHz	-61.41	-57.06	-61.41	-57.06
Propagation condition			-	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.14.2.1.5.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 872 ms from the beginning of time period T2.
The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay is defined in clause 6.1C.2, can be expressed as:

$$D_{CHO} = T_{RRC} + T_{Event_DU} + T_{measure} + T_{interrupt} + T_{CHO_execution}$$

where:

RRC procedure delay T_{RRC} = 10 ms and is specified in clause 12 in TS 38.331 [2].

T_{Event_DU} = start of T2

UE moving speed, v = (108km/h*1000/3600) = 30m/s.

At start of T2,

distance to source cell reference location is 30 m/s * 12 s – (-700)m = 1060m, and D1-1 = 1000m

distance to target cell reference location is 30 m/s * 12 s – 1300m = -940m, and D1-2 = 1000m

i.e. D1-1 and D1-2 conditions are fulfilled at start of T2 with >=50m location margin.

$T_{measure}$ = max(600 + 200 ms, 0) = 800 ms;

$T_{interrupt}$ = 62ms; $T_{CHO_execution}$ = 10ms.

This gives a total of 800ms + 62ms + 10ms = 872 ms.

A.14.2.1.6 Inter-frequency SAN distance-based conditional Handover from FR1 to FR1

A.14.2.1.6.1 Test Purpose and Environment

This test is to verify the requirement for inter -frequency SAN distance-based conditional handover from FR1 to FR1 specified in clause 6.1C.2.

A.14.2.1.6.2 Test Parameters

The test scenario comprises of 2 NR FDD carrier and one cell on each carrier as given in table A.14.2.1.6.2-1, and A.14.2.1.6.2-2. Both handover delay and interruption length are tested.

The test consists of two successive time periods, with time durations of T1 and T2 respectively. At the start of time duration T1, the UE may not have any timing information of cell 2. During T1, the UE is configured to measure inter-frequency neighbour cell and Gap pattern ID gp0. The RRC message implying distance-based handover to cell 2 with Event D1 shall be sent to UE, at a time earlier than T_{RRC} (10ms) before the beginning of T2.

Starting T2, cell 2 becomes detectable and offset better than cell 1 and after 11670ms of T2, location condition event condEventD1-r17 is fulfilled.

Table A.14.2.1.6.2-1: Supported test configurations

Configuration	Description
1	GSO, NR FDD, 15kHz SSB SCS, 10 MHz BW
2	NGSO, NR FDD, 15kHz SSB SCS, 10 MHz BW
Note: If UE supports both NGSO and GSO, the GSO-based test cases can be skipped if the UE passes NGSO-based test cases.	

Table A.14.2.1.6.2-2: General test parameters for Inter -frequency SAN distance-based conditional handover from FR1 to FR1

Parameter		Unit	Value	Comment
RF Channel Number			1, 2	Two NR NTN satellite RF channel
Initial conditions	Active cell		Cell 1	FDD duplex mode cell
	Neighbouring cell		Cell 2	FDD duplex mode cell
Final condition	Active cell		Cell 2	
Satellite configuration	Config 1		RMC in [A.x]	For GSO satellite configuration
	Config 2		RMC in [A.x]	For NGSO satellite configuration
UE position (N,S, H) at T2 start			[(0, 0, 0)]	Set by AT command
UE moving speed		km/h	[(108, 0, 0)]	Set by AT command
referenceLocation1-r17.condEventD1-r17		m	[(-700, 0, 0)]	Reference location for serving cell
referenceLocation2-r17.condEventD1-r17		m	[(1300, 0, 0)]	Reference location for target cell
distanceThreshFromReference1-r17.condEventD1-r17		50m	[20]	D1-1 Location condition is fulfilled at T2
distanceThreshFromReference2-r17.condEventD1-r17		50m	[20]	D1-2 Location condition is fulfilled at T2
hysteresis-r17.condEventD1-r17		10m	0	
timeToTrigger-r17.condEventD1-r17		s	0	
A3-Offset in condition		dB	0	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	1	
T2		s	12	

Table A.14.2.1.6.2-3: Cell specific test parameters for Inter-frequency SAN distance-based conditional handover from FR1 to FR1

Parameter	Test configuration	Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number	Config 1, 2		1		2	
$BW_{channel}$		MHz	10: $N_{RB,c} = 52$		10: $N_{RB,c} = 52$	
BWP BW		MHz	10: $N_{RB,c} = 52$		10: $N_{RB,c} = 52$	
TA_{Common}	Config 1, 2	s	0		0	
$TA_{CommonDrift}$		s	0		0	
$TA_{CommonDriftVariation}$		s	0		0	
K_{offset}	Config 1	ms	[239]		[239]	
	Config 2	ms	[4]		[4]	
K_{mac}	Config 1, 2	ms	0		0	
DRX Cycle		ms	Not Applicable			
PDSCH Reference measurement channel			SR.1.1 FDD			
CORESET Reference Channel			CR.1.1 FDD			
TRS configuration			TRS.1.1 FDD			
OCNG Patterns			OP.1			
SMTC Configuration			SMTC.1			
SSB Configuration			SSB.1 FR1			
PDSCH/PDCCH subcarrier spacing		kHz	15 kHz			
PUCCH/PUSCH subcarrier spacing		kHz	15 kHz			
PRACH configuration			FR1 PRACH configuration 1			

BWP configuration	Initial DL BWP	Config 1, 2		DLBWP.0.1			
	Dedicated DL BWP			DLBWP.1.1			
	Initial UL BWP			ULBWP.0.1			
	Dedicated UL BWP			ULBWP.1.1			
EPRE ratio of PSS to SSS		Config 1, 2	dB	0			
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		Config 1, 2	dBm/ 15kHz	-98			
N_{oc} Note2			dBm/ SCS	-98			
$\hat{E}_s / I_{ot}$			dB	4	4	-Infinity	9
$\hat{E}_s / N_{oc}$			dB	4	4	-Infinity	9
SSB_RP			dBm/ SCS	-94	-94	-Infinity	-89
Io Note3			dBm/ 9.36MHz	-64.59	-64.59	-70.05	-60.53
Propagation condition			-	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.14.2.1.6.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 later than 11670ms and less than 11741 ms from the beginning of time period T2.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay is defined in clause 6.1C.2, can be expressed as:

$$D_{CHO} = T_{RRC} + T_{Event_DU} + T_{measure} + T_{interrupt} + T_{CHO_execution}$$

where:

RRC procedure delay T_{RRC} = 10 ms and is specified in clause 12 in TS 38.331 [2].

T_{Event_DU} = start of T2

UE moving speed, v = (108km/h*1000/3600) = 30m/s.

At 1667ms after start of T2,

distance to source cell reference location is 30 m/s * 11.67 s – (-700)m = 1050m, and D1-1 = 1000m

distance to target cell reference location is 30 m/s * 11.67 s – 1300m = -950m, and D1-2 = 1000m

i.e. D1-1 and D1-2 conditions are fulfilled at T2 + 11670ms with >=50m location margin.

$T_{measure}$ = max(600 + 200 ms, 11670ms) = 11670ms;

$T_{interrupt}$ = 62ms; $T_{CHO_execution}$ = 10ms.

This gives a total of 11670ms + 62ms + 10ms = 11741 ms.

A.14.2.2 RRC Connection Mobility Control

A.14.2.2.1 SA: RRC Re-establishment for SAN

A.14.2.2.1.1 Intra-frequency RRC Re-establishment in FR1

A.14.2.2.1.1.1 Test Purpose and Environment

The purpose is to verify that the NR intra-frequency RRC re-establishment delay in FR1 with known target cell is within the specified limits. These tests will verify the requirements in clause 6.2C.1.

The test parameters are given in table A.14.2.2.1.1.1-1, table A.14.2.2.1.1.1-2 and table A.14.2.2.1.1.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, is deactivated. The time period T3 starts after the occurrence of the radio link failure.

During the test, the test system shall emulate and send the GNSS signal to the test UE. The test parameters for GNSS signals are defined in B.4.1. The UE shall be provided with the valid information about the SAN serving the each cell in the test before the test.

Table A.14.2.2.1.1.1-1: Supported test configurations

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.2.2.1.1.1-2: General test parameters for NR intra-frequency RRC Re-establishment test case in FR1

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell1	
	Neighbour cells		1, 2	Cell2	
Final condition	Active cell		1, 2	Cell2	
RF Channel Number			1, 2	1	
Time offset between cells			1	3 ms	Asynchronous cells
N310		-	1, 2	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1, 2	1	Minimum consecutive in-sync indications from lower layers

T310	ms	1, 2	0	Radio link failure timer;
T311	ms	1, 2	3000	RRC re-establishment timer
Access Barring Information	-	1, 2	Not Sent	No additional delays in random access procedure.
SMTC configuration		1, 2	SMTC.2	
DRX cycle length	s	1, 2	OFF	
PRACH configuration		1, 2	FR1 PRACH configuration 1	Table A.3.8.2.1-1
T1	s	1, 2	5	
T2	ms	1, 2	640	Time for the UE to detect RLF (Summation of $T_{Evaluate_out_SSB}$ defined in clause 8.1C in TS 38.133, T310 and the period for UE turns off transmitter defined in clause 8.1C.5 in TS 38.133)
T3	s	1, 2	2	

Table A.14.2.2.1.1.1-3: Cell specific test parameters for NR intra-frequency RRC Re-establishment test case in FR1

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Satellite information		1	SSC.1			NSC.1		
		2	SSC.2			NSC.2		
PDSCH RMC configuration		1, 2	SR.1.1 FDD			SR.1.1 FDD		
RMSI CORESET RMC configuration		1, 2	CR.1.1 FDD			CR.1.1 FDD		
Dedicated CORESET RMC configuration		1, 2	CCR.1.1 FDD			CCR.1.1 FDD		
OCNG Pattern		1, 2	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
TRS configuration		1, 2	TRS.1.1 FDD			TRS.1.1 FDD		
Initial DL BWP configuration		1, 2	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2	ULBWP.0.1			ULBWP.0.1		
Active DL BWP confgiuration		1, 2	DLBWP.1.1	N/A	N/A	N/A	N/A	DLBWP.1.1
Active UL BWP configuration		1, 2	ULBWP.1.1	N/A	N/A	N/A	N/A	ULBWP.1.1
SSB configuration		1, 2	SSB.1 FR1			SSB.1 FR1		
RLM-RS		1, 2	SSB			SSB		
$\hat{E}_s/I_{ot}$	dB	1, 2	1.54	-infinity	-infinity	-3.79	4	4
N_{oc} Note2	dBm/SCS	1, 2	-98					
N_{oc} Note2	dBm/15 kHz	1, 2	-98					
$\hat{E}_s/N_{oc}$	dB	1, 2	7	-infinity	-infinity	4	4	4
SS-RSRP Note3	dBm/SCS	1, 2	-91	-infinity	-infinity	-94	-94	-94
Io	dBm/9.36 MHz	1, 2	-60.74	-64.59	-64.59	-60.74	-64.59	-64.59
Propagation Condition		1, 2	AWGN					

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.14.2.2.1.1.2 Test Requirements

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to a known NR intra frequency cell shall be less than 1.6 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{re\text{-}establish_delay} = T_{UL_grant} + T_{UE_re\text{-}establish_delay}.$$

Where:

T_{UL_grant} = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence T_{UL_grant} is not used.

$T_{UE_re-establish_delay} = 50 \text{ ms} + T_{identify_intra_NR} + \sum_{i=1}^{Nfreq-1} T_{identify_inter_NR,i} + T_{SI-NR} + T_{PRACH}$

$N_{freq} = 1$

$T_{identify_intra_NR} = 200$ ms

$T_{SI} = 1280$ ms, provided that SIB1 and SIB19 are scheduled with 20ms period; it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target intra-frequency NR cell.

$T_{PRACH} = 15$ ms; it is the additional delay caused by the random access procedure.

This gives a total of [1545] ms, allow [1.6] s in the test case.

A.14.2.2.1.2 Inter-frequency RRC Re-establishment in FR1

A.14.2.2.1.2.1 Test Purpose and Environment

The purpose is to verify that the NR inter-frequency RRC re-establishment delay in FR1 without known target cell is within the specified limits. These tests will verify the requirements in clause 6.2C.1.

The test parameters are given in table A.14.2.2.1.2.1-1, table A.14.2.2.1.2.1-2 and table A.14.2.2.1.2.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, becomes inactive. The time period T3 starts after the occurrence of the radio link failure. During T1, the UE shall be configured with the carrier frequency of cell 2 (with RF Channel Number #2) to ensure that the UE has the context of the carrier frequency of cell 2 by the end of T1.

During the test, the test system shall emulate and send the GNSS signal to the test UE. The test parameters for GNSS signals are defined in B.4.1. The UE shall be provided with the valid information about the SAN serving the each cell in the test before the test.

Table A.14.2.2.1.2.1-1: Supported test configurations

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.2.2.1.2.1-2: General test parameters for NR inter-frequency RRC Re-establishment test case in FR1

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell1	
	Neighbour cells		1, 2	Cell2	
Final condition	Active cell		1, 2	Cell2	
RF Channel Number			1, 2	1, 2	
Time offset between cells			1, 2	3 ms	Asynchronous cells
N310		-	1, 2	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1, 2	1	Minimum consecutive in-sync indications from lower layers
T310		ms	1, 2	0	Radio link failure timer;
T311		ms	1, 2	5000	RRC re-establishment timer
Access Barring Information		-	1, 2	Not Sent	No additional delays in random access procedure.
SMTC configuration			1, 2	SMTC.2	
DRX cycle length		s	1, 2	OFF	
PRACH configuration			1, 2	FR1 PRACH configuration 1	Table A.3.8.2.1-1
T1		s	1, 2	5	
T2		ms	1, 2	640	Time for the UE to detect RLF (Summation of $T_{Evaluate_out_SSB}$ defined in clause 8.1C in TS 38.133, T310 and the period for UE turns off transmitter defined in clause 8.1C.5 in TS 38.133)
T3		s	1, 2	5	

Table A.14.2.2.1.2.1-3: Cell specific test parameters for NR inter-frequency RRC Re-establishment test case in FR1

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Satellite information		1	SSC.1			NSC.1		
		2	SSC.2			NSC.2		
RF Channel Number		1, 2	1			2		
PDSCH RMC configuration		1, 2	SR.1.1 FDD			SR.1.1 FDD		
RMSI CORESET RMC configuration		1, 2	CR.1.1 FDD			CR.1.1 FDD		
Dedicated CORESET RMC configuration		1, 2	CCR.1.1 FDD			CCR.1.1 FDD		

OCNG Pattern		1, 2	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
TRS configuration		1, 2	TRS.1.1 FDD			TRS.1.1 FDD		
Initial DL BWP configuration		1, 2	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2	ULBWP.0.1			ULBWP.0.1		
Active DL BWP confgiuration		1, 2	DLBWP. 1.1	N/A	N/A	N/A	N/A	DLBW P.1.1
Active UL BWP configuration		1, 2	ULBWP. 1.1	N/A	N/A	N/A	N/A	ULBW P.1.1
SSB configuration		1, 2	SSB.1 FR1			SSB.1 FR1		
RLM-RS		1, 2	SSB			SSB		
$\hat{E}_s/I_{ot}$	dB	1, 2	4	-infinity	-infinity	-infinity	-infinity	7
N_{oc} Note2	dBm/SCS	1, 2	-98					
N_{oc} Note2	dBm/15 kHz	1, 2	-98					
$\hat{E}_s/N_{oc}$	dB	1, 2	4	-infinity	-infinity	-infinity	-infinity	7
SS-RSRP Note3	dBm/SCS	1, 2	-94	-infinity	-infinity	-infinity	-infinity	-91
Io	dBm/9.36 MHz	1, 2	-64.59	-70. 05	-70. 05	-70. 05	-70. 05	-62.26
Propagation Condition		1, 2	AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.14.2.2.1.2.2 Test Requirements

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to an unknown NR inter frequency cell shall be less than 3 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{re\text{-}establish_delay} = T_{UL_grant} + T_{UE_re\text{-}establish_delay}.$$

Where:

T_{UL_grant} = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence T_{UL_grant} is not used.

$$T_{UE_re-establish_delay} = 50\,ms + T_{identify_intra_NR} + \sum_{i=1}^{Nfreq-1} T_{identify_inter_NR,i} + T_{SI-NR} + T_{PRACH}$$

$N_{freq} = 2$

$T_{identify_intra_NR}$ = 800 ms

$T_{identify_inter_NR}$ = 800 ms

T_{SI} = 1280 ms, provided that SIB1 and SIB19 are scheduled with 20ms period; it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target inter-frequency NR cell.

T_{PRACH} = 15 ms; it is the additional delay caused by the random access procedure.

This gives a total of [2945] ms, allow [3] s in the test case.

A.14.2.2.2 Random Access

A.14.2.2.2.1 4-step RA type contention based random access test in FR1 for NR standalone

A.14.2.2.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in Clause 6.2C.2.2 and Clause 7.1C.2 in an AWGN model.

For this test one cell is used and configured as PCell in FR1. Supported test parameters are shown in Table A.14.2.2.2.1.1-1. UE capable of SA with PCell in FR1 needs to be tested by using the parameters in Table A.14.2.2.2.1.1-2.

Table A.14.3.2.2.1.1-1: Supported test configurations for contention based random access test for satellite access

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.2.2.2.1.1-2: General test parameters for contention based random access test for satellite access

Parameter		Unit	Test-1	Comments
SSB Configuration	Config 1		SSB pattern 1 in FR1	As defined in A.3.10, except for number of SSBs per SS-burst and SS/PBCH block index as below
	Config 2		SSB pattern 2 in FR1	
Number of SSBs per SS-burst			2	Different from the definition in A.3.10
SS/PBCH block index			0,1	Different from the definition in A.3.10
Duplex Mode for Cell 1	Config 1		FDD	
	Config 2		FDD	
CSI-RS for tracking	Config 1, 2		TRS.1.1 FDD	
OCNG Pattern Note 1			OP.1	As defined in A.3.2.1.
PDSCH parameters Note 4	Config 1, 2		SR.1.1 FDD	As defined in A.3.1.1.
RMSI CORESET Reference Channel	Config 1, 2		CR.1.1 FDD	
Dedicated CORESET Reference Channel	Config 1, 2		CCR.1.1 FDD	
NR RF Channel Number			1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH_DMRS to SSS		dB		
EPRE ratio of PBCH to PBCH_DMRS		dB		

EPRE ratio of PDCCH_DMRS to SSS			dB		
EPRE ratio of PDCCH to PDCCH_DMRS			dB		
EPRE ratio of PDSCH_DMRS to SSS			dB		
EPRE ratio of PDSCH to PDSCH_DMRS			dB		
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	Power of SSB with index 0 is set to be above configured *rsrp-ThresholdSSB*
	N_{oc}	Config 1, 2	dBm/15kHz	-98	
	$\hat{E}_s / N_{oc}$		dB	3	
	SS-RSRP Note 3		dBm/ SCS	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured *rsrp-ThresholdSSB*
	N_{oc}	Config 1, 2	dBm/15kHz	-98	
	$\hat{E}_s / N_{oc}$		dB	-17	
	SS-RSRP Note 3		dBm/ SCS	-115	
Io Note 2		Config 1, 2	dBm	-65.3/9.36MHz	For symbols without SSB index 1
ss-PBCH-BlockPower			dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [2].
Configured UE transmitted power ($P_{CMAX,\ f,c}$)			dBm	23	As defined in clause 6.2.4 in TS 38.101-1.
PRACH Configuration				FR1 PRACH configuration 1	As defined in A.3.8.
Propagation Condition			-	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.
Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.
Note 3: Void
Note 4: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.

A.14.2.2.2.1.2 Test Requirements

Contention based random access is triggered by *not* explicitly assigning a random access preamble via dedicated signalling in the downlink.

A.14.2.2.2.1.2.1 Random Access Preamble Transmission

To test the UE behavior specified in Clause 6.2C.2.2.1.1 the System Simulator shall receive the Random Access Preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SS-RSRP above the configured *rsrp-ThresholdSSB.*

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2C.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1C.2.

A.14.2.2.2.1.2.2 Random Access Response Reception

To test the UE behavior specified in Clause 6.2C.2.2.1.2 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a Random Access Response *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for Random Access Response(s) and shall transmit the msg3 if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2C.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1C.2.

A.14.2.2.2.1.2.3 No Random Access Response Reception

To test the UE behavior specified in clause 6.2C.2.2.1.3 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2C.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1C.2.

A.14.2.2.2.1.2.4 Receiving an UL grant for msg3 retransmission

To test the UE behavior specified in clause 6.2C.2.2.1.4 the System Simulator shall provide an UL grant for msg3 retransmission following a successful Random Access Response.

The UE shall re-transmit the msg3 upon the reception of an UL grant for msg3 retransmission.

A.14.2.2.2.1.2.5 Reception of an Incorrect Message over Temporary C-RNTI

To test the UE behavior specified in Clause 6.2C.2.2.1.5 the System Simulator shall send a message addressed to the temporary C-RNTI with a UE Contention Resolution Identity included in the MAC control element *not* matching the CCCH SDU transmitted in msg3 uplink message.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires unless the received message includes a UE Contention Resolution Identity MAC control element and the UE Contention

Resolution Identity included in the MAC control element matches the CCCH SDU transmitted in the uplink message.

A.14.2.2.2.1.2.6 Reception of a Correct Message over Temporary C-RNTI

To test the UE behavior specified in Clause 6.2C.2.2.1.5 the System Simulator shall send a message addressed to the temporary C-RNTI with a UE Contention Resolution Identity included in the MAC control element matching the CCCH SDU transmitted in the msg3 uplink message.

The UE shall send ACK if the Contention Resolution is successful.

A.14.2.2.2.1.2.7 Contention Resolution Timer expiry

To test the UE behavior specified in Clause 6.2C.2.2.1.6 the System Simulator shall *not* send a response to a msg3.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if the Contention Resolution Timer expires.

A.14.2.2.2.2 4-step RA type non-contention based random access test in FR1 for NR standalone

A.14.2.2.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in Clause 6.2C.2.2 and Clause 7.1C.2 in an AWGN model.

For this test one cell is used and configured as PCell in FR1. Supported test parameters are shown in Table A.14.2.2.2.2.1-1. UE capable of SA with PCell in FR1 needs to be tested by using the parameters in Table A.14.2.2.2.2.1-2 for SSB-based non-contention based random access test (Test 1) and CSI-RS-based non-contention based random access test (Test 2). Test 2 is only applicable to UE which supports csi-RSRP-AndRSRQ-MeasWithSSB or csi-RSRP-AndRSRQ-MeasWithoutSSB.

Table A.14.2.2.2.2.1-1: Supported test configurations for non-contention based random access test for satellite access

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.2.2.2.2.1-2: General test parameters for non-contention based random access test satellite access

Parameter		Unit	Test-1	Test-2	Comments
SSB Configuration	Config 1		SSB pattern 1 in FR1	SSB pattern 1 in FR1	As defined in A.3.10, except for number of SSBs per SS-burst and SS/PBCH block index as below
	Config 2		SSB pattern 2 in FR1	SSB pattern 2 in FR1	
Number of SSBs per SS-burst			2	2	Different from the definition in A.3.10

SS/PBCH block index			0,1	0,1	Different from the definition in A.3.10
CSI-RS Configuration	Config 1, 2		N/A	CSI-RS.1.1 FDD	As defined in A.3.1.4
Duplex Mode for Cell 1	Config 1, 2		FDD	FDD	
CSI-RS for tracking	Config 1, 2		TRS.1.1 FDD	TRS.1.1 FDD	
OCNG Pattern Note 1			OP.1	OP.1	As defined in A.3.2.1.
PDSCH parameters Note 4	Config 1, 2		SR.1.1 FDD	SR.1.1 FDD	As defined in A.3.1.1.
RMSI CORESET Reference Channel	Config 1, 2		CR.1.1 FDD	CR.1.1 FDD	
Dedicated CORESET Reference Channel	Config 1, 2		CCR.1.1 FDD	CCR.1.1 FDD	
NR RF Channel Number			1	1	
EPRE ratio of PSS to SSS		dB	0	0	
EPRE ratio of PBCH_DMRS to SSS		dB			
EPRE ratio of PBCH to PBCH_DMRS		dB			
EPRE ratio of PDCCH_DMRS to SSS		dB			
EPRE ratio of PDCCH to PDCCH_DMRS		dB			
EPRE ratio of PDSCH_DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH_DMRS		dB			
SSB with index 0	$\hat{E}_s / I_{ot}$	dB	3	3	Power of SSB with index 0 is set to be above configured *rsrp-ThresholdSSB*
	N_{oc} Config 1, 2	dBm/15kHz	-98	-98	
	$\hat{E}_s / N_{oc}$	dB	3	3	
	SS-RSRP Note 3	dBm/ SCS	-95	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$	dB	-17	-17	Power of SSB with index 1 is set to be below configured *rsrp-ThresholdSSB*
	N_{oc} Config 1, 2	dBm/15kHz	-98	-98	
	$\hat{E}_s / N_{oc}$	dB	-17	-17	
	SS-RSRP Note 3	dBm/ SCS	-115	-115	
Io Note 2	Config 1, 2	dBm	-65.3/9.36MHz	-65.3/9.36MHz	For symbols without SSB index 1
ss-PBCH-BlockPower		dBm/ SCS	-5	-5	As defined in clause 6.3.2 in TS 38.331 [2].
Configured UE transmitted power ($P_{CMAX,\ f,c}$)		dBm	23	23	As defined in clause 6.2.4 in TS 38.101-1.
PRACH Configuration			FR1 PRACH configuration 2	FR1 PRACH configuration 3	As defined in A.3.8.2.
Propagation Condition		-	AWGN	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.

Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.

Note 3: Void

Note 4: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.

A.14.2.2.2.2 Test Requirements

Non-Contention based random access is triggered by explicitly assigning a random access preamble via dedicated signalling in the downlink. In the test, the non-contention based random access procedure is not initialized for Other SI requested from UE or beam failure recovery.

A.14.2.2.2.2.1 SSB-based Random Access Preamble Transmission

In Test-1, to test the UE behavior specified in Clause 6.2C.2.2.2.1 for SSB-based Random Access Preamble tranmsision, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs configured, the System Simulator shall receive the Random Access Preamble which has the Preamble Index associated with the SSB with index 0.

In addition, the System Simulator shall receive the Random Access Preamble on the PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0, and the selected PRACH occasion shall belongs to the PRACH occassions permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2C.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1C.2.

A.14.2.2.2.2.2 CSI-RS-based Random Access Preamble Transmission

In Test-2, to test the UE behavior specified in Clause 6.2C.2.2.2.1 for CSI-RS-based Random Access Preamble tranmsision, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with CSI-RSs configured, the System Simulator shall receive the Random Access Preamble which has the Preamble Index associated with the CSI-RS configured.

In addition, the System Simulator shall receive the Random Access Preamble on the PRACH occasion which belongs to the PRACH occasions corresponding to the CSI-RS configured, and the selected PRACH occasion shall belongs to the PRACH occassions permitted by the restrictions given by the *ra-OccasionList*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2C.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1C.2.

A.14.2.2.2.2.3 Random Access Response Reception

To test the UE behavior specified in Clause 6.2C.2.2.2.2 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a Random Access Response *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for Random Access Response(s) if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2C.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1C.2.

A.14.2.2.2.2.2.4 No Random Access Response Reception

To test the UE behavior specified in clause 6.2C.2.2.2.3 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window configured in *RACH-ConfigCommon*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2C.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1C.2.

A.14.2.2.3 RRC Connection Release with Redirection

A.14.2.2.3.1 Redirection from NR in FR1 to NR in FR1

A.14.2.2.3.1.1 Test Purpose and Environment

This test is to verify RRC connection release with redirection from NR to NR requirements specified in clause 6.2C.3.2.1.

A.14.2.2.3.1.2 Test Parameters

Supported test configurations are shown in table A.14.2.2.3.1.2-1. The time delay is tested by using the parameters in table A.14.2.2.3.1.2-2, and A.14.2.2.3.1.2-3.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. The *RRCRelease* message shall be sent to the UE during period T1 and the start of T2 is the instant when the last TTI containing the RRC message is sent to the UE. Prior to time duration T2, the UE shall not have any timing information of Cell 2. Cell 2 is powered up at the beginning of the T2. Cell 1 and Cell 2 belong to different tracking areas.

Table A.14.2.2.3.1.2-1: Redirection from NR to NR test configurations

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.2.2.3.1.2-2: General test parameters for Redirection from NR to NR test case

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	

Final condition	Active cell		Cell 2	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 µs	Synchronous cells
T1		s	5	
T2		s	2.3	

Table A.14.2.2.3.1.2-3: Cell specific test parameters for Redirection from NR to NR test case

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number			1		2	
Duplex mode	Config 1, 2		FDD			
SSB Configuration	Config 1, 2		SSB.1 FR1			
CSI-RS for tracking	Config 1, 2		TRS.1.1 FDD			
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
DRx Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1, 2		SR.1.1 FDD			
CORESET Reference Channel	Config 1, 2		CR.1.1 FDD			
OCNG Patterns			OCNG pattern 1			
SMTC configuration	Config 1,2		SMTC.1 FR1			
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz			
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15 kHz			
PRACH configuration			FR1 PRACH configuration 1			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-98			
N_{oc} Note2	Config 1,2	dBm/SCS	-98			
	Config 3		-95			
$\hat{E}_s/I_{ot}$		dB	4	4	-infinity	4
$\hat{E}_s/N_{oc}$		dB	4	4	-infinity	4
Io Note3	Config 1,2	dBm/ 9.36MHz	-64.59	-64.59	-70.05	-64.59
	Config 3	dBm/	-58.49	-58.49	-63.94	-58.49

		38.16MHz				
Propagation condition		-	AWGN			
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					

A.14.2.2.3.1.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 2240 ms from the beginning of time period T2.
The rate of correct RRC connection release redirection to NR observed during repeated tests shall be at least 90%.

NOTE: The redirection delay can be expressed as:

$$T_{connection_release_redirect_NR} = T_{RRC_procedure_delay} + T_{identify\text{-}NR} + T_{SI\text{-}NR} + T_{RACH},$$

Where:

$T_{RRC_procedure_delay}$ = 110 ms in the test.

$T_{identify\text{-}NR}$ = 680 ms in the test.

$T_{SI\text{-}NR}$ = 1280 ms, it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target NR cell.

T_{RACH} = 170 ms in the test.

This gives a total of 2240 ms.

A.14.3 Timing for Satellite Access

A.14.3.1 UE transmit timing for Satellite Access

A.14.3.1.1 NR UE Transmit Timing Test for FR1

A.14.3.1.1.1 Test Purpose and environment

The purpose of this test is to verify that the UE can follow frame timing change of the reference cell and that the UE initial transmit timing accuracy, maximum amount of timing change in one adjustment, minimum and maximum adjustment rate are within the specified limits. This test will verify the requirements in clause 7.1C.2. Supported test configurations are shown in Table A.14.3.1.1.1-1.

Table A.14.3.1.1.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: If UE supports both NGSO and GSO, the test case Config 1 can be skipped if the UE passes test case Config 2.	

The test consists a single NR cell (PCell). Table A.14.3.1.1.1-2 defines the parameters to be configured and strength of the transmitted signals. The transmit timing is verified by the UE transmitting SRS using the configuration

defined in Table A.14.3.1.1.1-3. The test system can emulate and send the GNSS signal to the test UE. The test parameters for GNSS signals are defined in B.4.1.

Table A.14.3.1.1.1-2: Cell Specific Test Parameters for UL Transmit Timing test

Parameter	Unit	Config	Test1	Test2
SSB ARFCN		1,2	1	1
Serving satellite configuration		1	SSC.1	
		2	SSC.2	
$BW_{channel}$	MHz	1,2	10: $N_{RB,c}$ = 52	
Initial BWP Configuration		1,2	DLBWP.0.1 ULBWP.0.1	
Dedicated BWP Configuration		1,2	DLBWP.1.1 ULBWP.1.1	
DRX Cycle	ms	1,2	N/A	DRX.8 Note5
PDSCH Reference measurement channel		1,2	SR.1.1 FDD	
RMSI CORESET Reference Channel		1,2	CR.1.1 FDD	
Dedicated CORESET Reference Channel		1,2	CCR.1.1 FDD	
OCNG Patterns		1,2	OP.1	
SSB configuration		1,2	SSB.1 FR1	
SMTC Configuration		1,2	SMTC.1	
TRS configuration		1,2	TRS.1.1 FDD	
EPRE ratio of PSS to SSS	dB	1,2	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	dBm/15 kHz	1,2	-98	-98
N_{oc} Note2	dBm/SCS	1,2	-98	-98
$\hat{E}_s / I_{ot}$		1,2	3	3
$\hat{E}_s / N_{oc}$		1,2	3	3
SS-RSRP Note3	dBm/SCS	1,2	-95	-95
Io Note3	dBm/9.36MHz	1,2	-65.2	-65.2
Propagation condition		1,2	AWGN	
SRS Config		1,2	SRSConf.1 Note6	SRSConf.2 Note6

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: DRX related parameters are given in Table A.3.3.8-1

Note 6: SRS configs are given in Table A.14.3.1.1.1-3

Table A.14.3.1.1.1-3: SRS Configuration for Timing Accuracy Test

	Field	SRSConf.1	SRSConf.2	Comments
SRS-ResourceSet	srs-ResourceSetId	0	0	
	srs-ResourceIdList	0	0	
	resourceType	Periodic	Periodic	
	Usage	Codebook	Codebook	
SRS-Resource	SRS-ResourceId	0	0	
	nrofSRS-Ports	Port1	Port1	
	transmissionComb	n2	n2	
	combOffset-n2	0	0	
	cyclicShift-n2	0	0	
	resourceMapping startPosition	0	0	
	resourceMapping nrofSymbols	n1	n1	
	resourceMapping repetitionFactor	n1	n1	
	freqDomainPosition	0	0	
	freqDomainShift	0	0	
	freqHopping c-SRS	14	14	Matches $N_{RB,c}$
	freqHopping b-SRS	0	0	
	freqHopping b-hop	0	0	
	groupOrSequenceHopping	Neither	Neither	
	resourceType	Periodic	Periodic	
	periodicityAndOffset-p	sl1, 0	sl320, 3	Offset to align with DRX periodicity
	sequenceId	0	0	Any 10 bit number

A.14.3.1.1.2 Test requirements

The test sequence shall be carried out in RRC_CONNECTED for every test case.

Following will be the test sequence for this test

1) Set up PCell according to parameters given in Table A.14.3.1.1.1-2.
2) After connection set up with the cell, the test equipment will verify that the timing of the NR cell is within $\left(N_{\mathrm{TA}} + N_{\mathrm{TA\text{-}offset}} + N_{\mathrm{TA,adj}}^{\mathrm{common}} + N_{\mathrm{TA,adj}}^{\mathrm{UE}}\right) \times T_{\mathrm{c}} \pm T_{\mathrm{e_NTN}}[\pm T_{\mathrm{margin}}]$ of the first detected path of DL SSB.
   a. The $N_{\mathrm{TA_offset}}$ value (in T_c units) is 25600
   b. The $N_{\mathrm{TA,adj}}^{\mathrm{common}}$ value is derived from the higher-layer parameters *TACommon*, *TACommonDrift*, and *TACommonDriftVariation*.
   c. The $N_{\mathrm{TA,adj}}^{\mathrm{UE}}$ value is computed by the UE based on UE position and serving-satellite-ephemeris-related higher-layers parameters.
   d. The $T_{\mathrm{e_NTN}}$ values depend on the DL and UL SCS for which the test is being run and are given in Table 7.1C.2-1
   e. The T_{margin} value (in T_c units) is [TBD].

3) If the NTN parameters are configured as GSO scenario, the test system shall adjust the timing of the DL path by values given in Table A.14.3.1.1.2-1. If the NTN parameters are configured as NGSO scenario, the test system shall adjust the timing of the DL path according to the serving-satellite-ephemeris-related higher-layers parameters.

Table A.14.3.1.1.2-1: Adjustment Value for DL Timing

SCS of SSB signals (kHz)	Adjustment Value	
	Test1	Test2
15	+64*64T_c	+32*64T_c

4) The test system shall verify that the adjustment step size and the adjustment rate shall be according to requirements specified in Clause 7.1C.2 Table 7.1C.2.1-1 until the UE transmit timing offset is within $\left(N_{\mathrm{TA}} + N_{\mathrm{TA\text{-}offset}} + N_{\mathrm{TA,adj}}^{\mathrm{common}} + N_{\mathrm{TA,adj}}^{\mathrm{UE}}\right) \times T_c \pm T_{\mathrm{e_NTN}}[\pm T_{\mathrm{margin}}]$ respective to the first detected path (in time) of DL SSB. Skip this step for test 2 with DRX configured.

5) The test system shall verify that the UE transmit timing offset stays within $\left(N_{\mathrm{TA}} + N_{\mathrm{TA\text{-}offset}} + N_{\mathrm{TA,adj}}^{\mathrm{common}} + N_{\mathrm{TA,adj}}^{\mathrm{UE}}\right) \times T_c \pm T_{\mathrm{e_NTN}}[\pm T_{\mathrm{margin}}]$ of the first detected path of DL SSB. For Test 2 the UE transmit timing offset shall be verified for the first transmission in the DRX cycle immediately after DL timing adjustment.

A.14.3.2 Timing advance for satellite access

A.14.3.2.1 SA FR1 timing advance adjustment accuracy

A.14.3.2.1.1 Test Purpose and Environment

The purpose of the test is to verify UE Timing Advance adjustment delay and accuracy requirement defined in clause 7.3C.

A.14.3.2.1.2 Test Parameters

Supported test configurations are shown in table A.14.3.2.1.2-1. Both timing advance adjustment delay and accuracy are tested by using the parameters in table A.14.3.2.1.2-2, A.14.3.2.1.2-3 and A.14.3.2.1.2-4.

In all test cases, single cell served by SAN is used. Each test consists of two successive time periods, with time duration of T1 and T2 respectively. In each time period, timing advance commands are sent to the UE and Sounding Reference Signals (SRS), as specified in table A.14.3.2.1.2-4, are sent from the UE and received by the test equipment. By measuring the reception of the SRS, the transmit timing, and hence the timing advance adjustment accuracy, can be measured.

During the test, the test system shall emulate and send the GNSS signal to the test UE by AT command.

The UE shall be provided with the valid information about the SAN serving cell before the test.During time period T1, the test equipment shall send one message with a Timing Advance Command MAC Control Element, as specified in Clause 6.1.3.4 in TS 38.321 [7]. The Timing Advance Command value shall be set to 31, which according to Clause 4.2 in TS 38.213 [3] results in zero adjustment of the Timing Advance. In this way, a reference value for the timing advance used by the UE is established.

During time period T2, the test equipment shall send a sequence of messages with Timing Advance Command MAC Control Elements, with Timing Advance Command value specified in table A.14.3.2.1.2-2. This value shall result in changes of the timing advance used by the UE, and the accuracy of the change shall then be measured, using the SRS sent from the UE.

As specified in Clause 7.3C.2.1, the UE adjusts its uplink timing at slot n+k+$1+2^{\mu}\cdot K_{\text{offset}}$ for a timing advance command received in slot n. This delay must be taken into account when measuring the timing advance adjustment accuracy, via the SRS sent from the UE.

The UE Time Alignment Timer, described in Clause 5.2 in TS 38.321 [7], shall be configured so that it does not expire in the duration of the test.

Table A.14.3.2.1.2-1: Timing advance supported test configurations

Config	Description
1	GSO, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NGSO, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
Note: If UE supports both NGSO and GSO, the test case Config 1 can be skipped if the UE passes test case Config 2.	

Table A.14.3.2.1.2-2: General test parameters for timing advance

Parameter	Unit	Value	Comment
RF channel number		1	
Initial DL BWP		DLBWP.0.1	As specified in Table A.3.9.2.1-1
Dedicated DL BWP		DLBWP.1.1	As specified in Table A.3.9.2.2-1
Initial UL BWP		ULBWP.0.1	As specified in Table A.3.9.3.1-1
Dedicated UL BWP		ULBWP.1.1	As specified in Table A.3.9.3.2-1
Timing Advance Command (T_A) value during T1		31	$N_{TA_new} = N_{TA_old}$ for the purpose of establishing a reference value from which the timing advance adjustment accuracy can be measured during T2
Timing Advance Command (T_A) value during T2		39	For 15 kHz SCS $N_{TA_new} = N_{TA_old} + 8192*T_c$ (based on equation in clause 4.2 of TS 38.213 [3])
T1	s	5	
T2	s	5	

Table A.14.3.2.1.2-3: Cell specific test parameters for timing advance

Parameter		Unit	Test1	
			T1	T2
Duplex mode	Config 1,2		FDD	
Satellite information	Config 1		SSC.1	
	Config 2		SSC.2	
$BW_{channel}$	Config 1,2	MHz	10: $N_{RB,c}$ = 52	
BWP BW	Config 1,2	MHz	10: $N_{RB,c}$ = 52	
DRX Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1,2		SR.1.1 FDD	
RMSI CORESET Reference Channel	Config 1,2		CR.1.1 FDD	
Dedicated CORESET Reference Channel	Config 1,2		CCR.1.1 FDD	
TRS configuration	Config 1,2		TRS.1.1 FDD	
OCNG Patterns			OCNG pattern 1	
SMTC configuration	Config 1,2		SMTC.1 FR1	
SSB configuration	Config 1,2		SSB.1 FR1	

PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15 kHz
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note2		dBm/15kHz	-98
N_{oc} Note2	Config 1,2	dBm/SCS	-98
$\hat{E}_s / I_{ot}$		dB	3
$\hat{E}_s / N_{oc}$		dB	3
Io Note3	Config 1,2	dBm/ 9.36MHz	-67.57
Propagation condition		-	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.14.3.2.1.2-4: Sounding Reference Symbol Configuration for timing advance

Field		Value	Comment
c-SRS	Config 1,2	12	Frequency hopping is disabled
b-SRS		0	
b-hop		0	
freqDomainPosition		0	Frequency domain position of SRS
freqDomainShift		0	
groupOrSequenceHopping		neither	No group or sequence hopping
SRS-PeriodicityAndOffset		sl5=2 for SCS 15kHz	Once every 5 slots
pathlossReferenceRS		ssb-Index=0	SSB #0 is used for SRS path loss estimation
usage		Codebook	Codebook based UL transmission
startPosition		0	resourceMapping setting. SRS on last symbol of slot, and 1symbols for SRS without repetition.
nrofSymbols		n1	
repetitionFactor		n1	
combOffset-n2		0	transmissionComb setting
cyclicShift-n2		0	
nrofSRS-Ports		port1	Number of antenna ports used for SRS transmission
Note: For further information see clause 6.3.2 in TS 38.331 [2].			

A.14.3.2.1.3 Test Requirements

The UE shall apply the signalled Timing Advance value to the transmission timing at the designated activation time i.e. k+$1+2^{\mu}\cdot K_{\text{offset}}$ slots after the reception of the timing advance command, where k=5.

The Timing Advance adjustment accuracy shall be within the limits specified in clause 7.3C.2.2.

The rate of correct Timing Advance adjustments observed during repeated tests shall be at least 90%.

A.14.4 Signalling characteristics

A.14.4.1 Radio link Monitoring

A.14.4.1.1 Radio Link Monitoring Out-of-sync Test for FR1 SAN PCell configured with SSB-based RLM RS in non-DRX mode

A.14.4.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the SAN PCell. This test will partly verify the FR1 radio link monitoring requirements in clause 8.1C.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0, and *purpose* set to '*rlf*'. Supported test configurations are shown in table A.14.4.1.1.1-1. The test parameters are given in Tables A.14.4.1.1.1-2, A.14.4.1.1.1-3, and A.14.4.1.1.1-4 below. There is one cell (Cell 1), which is the active NR cell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.14.4.1.1.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. The UE is configured to perform inter-frequency measurements using Gap Pattern ID #0 (40ms) in test 1.

During the test, the test system shall emulate and send the GNSS signal to the test UE. The test parameters for GNSS signals are defined in B.4.1. The UE shall be provided with the valid information about the SAN serving the each cell in the test before the test.

Table A.14.4.1.1.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.4.1.1.1-2: General test parameters for FR1 out-of-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
NTN reference configuration	Config 1		TBD
	Config 2		TBD
$BW_{channel}$	Config 1, 2	MHz	10: $N_{RB,c}$ = 52
DL initial BWP configuration	Config 1, 2		DLBWP.0.1

DL dedicated BWP configuration	Config 1, 2		DLBWP.1.1
UL initial BWP configuration	Config 1, 2		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1, 2		CR.1.1 FDD
Dedicated CORESET Reference Channel	Config 1, 2		CCR.1.3 FDD
SSB Configuration	Config 1, 2		SSB.1 FR1
SMTC Configuration	Config 1, 2		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 kHz
PRACH Configuration	Config 1, 2		Table A.3.8.2.1-1
SSB index assigned as RLM RS			0
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			*OFF*
Gap pattern ID			*gp0*
Layer 3 filtering			*Enabled*
T310 timer		ms	*0*
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1, 2		CSI-RS.1.1 FDD
CSI-RS for tracking	Config 1, 2		TRS.1.1 FDD
T1		s	0.2
T2		s	0.48
T3		s	0.48
D1		s	0.44
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.14.4.1.1.1-3: Cell specific test parameters for FR1 (Cell 1) for out-of-sync radio link monitoring tests in non-DRX mode

Parameter		Unit	Test 1		
			T1	T2	T3
EPRE ratio of PDCCH DMRS to SSS		dB	4		
EPRE ratio of PDCCH to PDCCH DMRS		dB	0		
EPRE ratio of PBCH DMRS to SSS		dB	0		
EPRE ratio of PBCH to PBCH DMRS		dB			
EPRE ratio of PSS to SSS		dB			
EPRE ratio of PDSCH DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1	dB	1	-7	-15
	Config 2		1	-7	-15
N_{oc}	Config 1	dBm/ 15kHz	-98		
	Config 2		-98		
N_{oc}	Config 1	dBm/ SCS	-98		
	Config 2		-98		
Propagation condition			TBD		

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 4: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in Figure A.6.5.1C.1.1-1.
Note 5: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6.

Table A.14.4.1.1.1-4: Measurement gap configuration for out-of-sync tests in non-DRX mode

Field	Test 1
	Value
gapOffset	0

Note: Ensure that RLM RS is partially overlapped with measurement gap

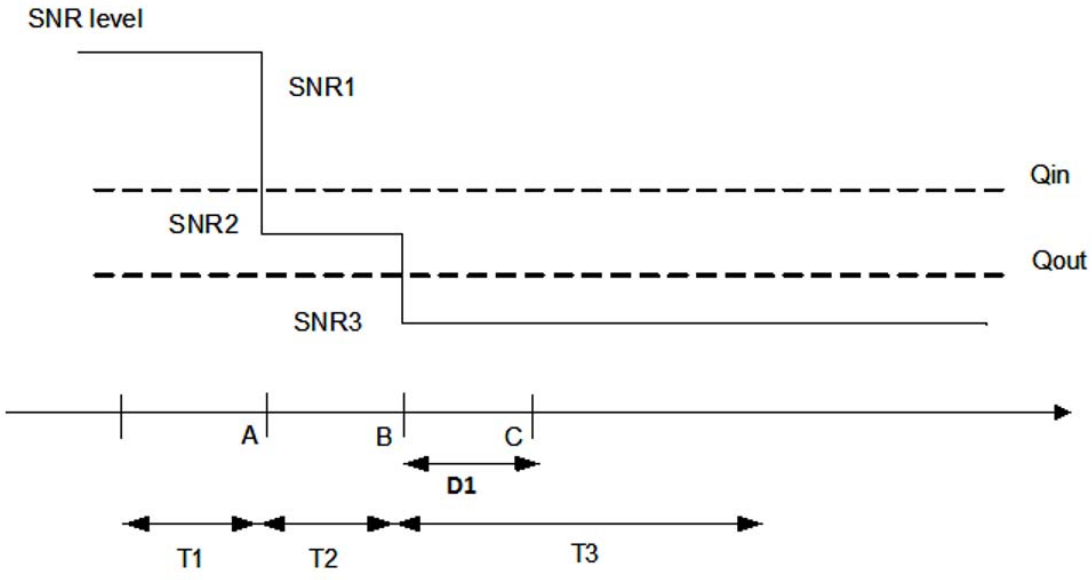

Figure A.14.4.1.1.1-1: SNR variation for out-of-sync testing

A.14.4.1.1.2 Test Requirements

The UE behaviour in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

A.14.4.1.2 Radio Link Monitoring In-sync Test for FR1 SAN PCell configured with SSB-based RLM RS in non-DRX mode

A.14.4.1.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the SAN PCell. This test will partly verify the FR1 radio link monitoring requirements in clause 8.1C.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0, and *purpose* set to '*rlf*'. Supported test configurations are shown in table A.14.4.1.2.1-1. The test parameters are given in Tables A.14.4.1.2.1-2, and A.14.4.1.2.1-3 below. There is one cell (Cell 1), which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.14.4.1.2.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms.

During the test, the test system shall emulate and send the GNSS signal to the test UE. The test parameters for GNSS signals are defined in B.4.1. The UE shall be provided with the valid information about the SAN serving the each cell in the test before the test.

Table A.14.4.1.2.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.4.1.2.1-2: General test parameters for FR1 in-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
NTN reference configuration	Config 1		TBD
	Config 2		TBD
$BW_{channel}$	Config 1, 2	MHz	10: $N_{RB,c}$ = 52
DL initial BWP configuration	Config 1, 2		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2		DLBWP.1.1
UL initial BWP configuration	Config 1, 2		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1, 2		CR.1.1 FDD
Dedicated CORESET Reference Channel	Config 1, 2		CCR.1.1 FDD
SSB Configuration	Config 1, 2		SSB.1 FR1
SMTC Configuration	Config 1, 2		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 kHz
PRACH Configuration	Config 1, 2		Table A.3.8.2.1-1
SSB index assigned as RLM RS			0
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS	dB	0

	energy to average SSS RE energy		
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			*OFF*
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*
T310 timer		ms	1000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1, 2		CSI-RS.1.1 FDD
CSI-RS for tracking	Config 1, 2		TRS.1.1 FDD
T1		s	0.2
T2		s	0.2
T3		s	0.24
T4		s	0.2
T5		s	0.88
D1		s	0.84
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.14.4.1.2.1-3: Cell specific test parameters for FR1 (Cell 1) for in-sync radio link monitoring tests in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0				
EPRE ratio of PBCH DMRS to SSS		dB	0				
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1	dB	1	-7	-15	-4.5	1

	Config 2		1	-7	-15	-4.5	1
N_{oc}	Config 1	dBm/ 15 kHz	-98				
	Config 2		-98				
N_{oc}	Config 1	dBm/ SCS	-98				
	Config 2		-98				
Propagation condition			TBD				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 4: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in Figure A.6.5.1C.2.1-1.
Note 5: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 and T4 is modified as specified in clause A.3.6.

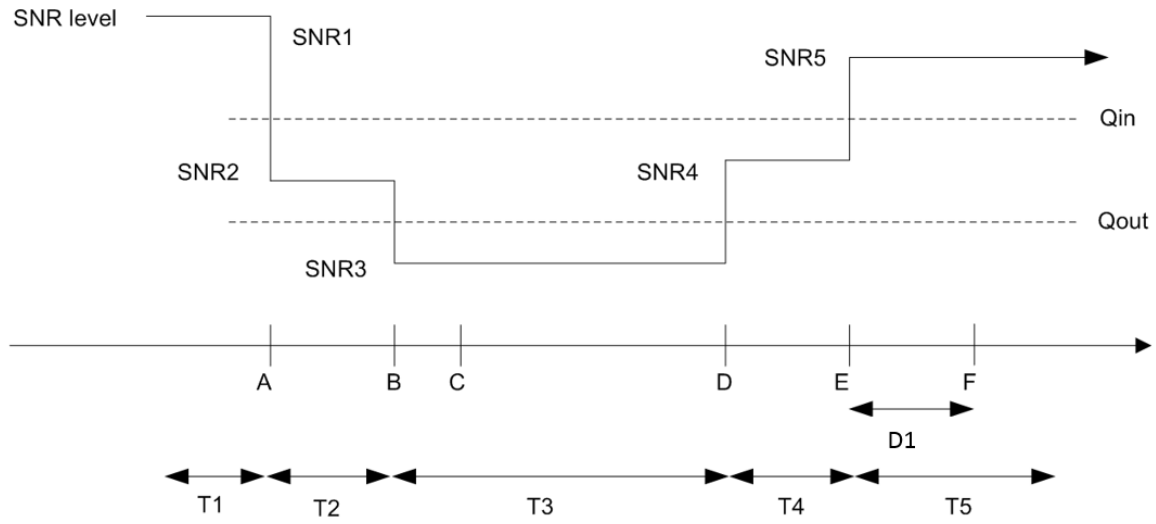

Figure A.14.4.1.2.1-1: SNR variation for in-sync testing

A.14.4.1.2.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90%.

A.14.4.1.3 Radio Link Monitoring Out-of-sync Test for FR1 SAN PCell configured with SSB-based RLM RS in DRX mode

A.14.4.1.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the SAN PCell when DRX is used. This test will partly verify the FR1 radio link monitoring requirements in clause 8.1C.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0, and *purpose* set to '*rlf*'. Supported test configurations are shown in table A.14.4.1.3.1-1. The test parameters are given in Tables A.14.4.1.3.1-2, and A.14.4.1.3.1-3. There is one cell (Cell 1), which is the active NR cell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.14.4.1.3.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

During the test, the test system shall emulate and send the GNSS signal to the test UE. The test parameters for GNSS signals are defined in B.4.1. The UE shall be provided with the valid information about the SAN serving the each cell in the test before the test.

Table A.14.4.1.3.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.4.1.3.1-2: General test parameters for FR1 out-of-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
NTN reference configuration	Config 1		TBD
	Config 2		TBD
$BW_{channel}$	Config 1, 2	MHz	10: $N_{RB,c}$ = 52
DL initial BWP configuration	Config 1, 2		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2		DLBWP.1.1
UL initial BWP configuration	Config 1, 2		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1, 2		CR.1.1 FDD
Dedicated CORESET Reference Channel	Config 1, 2		CCR.1.3 FDD

SSB Configuration	Config 1, 2		SSB.1 FR1
SMTC Configuration	Config 1, 2		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 kHz
PRACH Configuration	Config 1, 2		Table A.3.8.2.1-1
SSB index assigned as RLM RS			0
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX Configuration			DRX.3
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*
T310 timer		ms	*0*
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1, 2		CSI-RS.1.1 FDD
CSI-RS for tracking	Config 1, 2		TRS.1.1 FDD
T1		s	0.2
T2		s	0.68
T3		s	0.68
D1		s	0.64
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.14.4.1.3.1-3: Cell specific test parameters for FR1 (Cell 1) for out-of-sync radio link monitoring tests in DRX mode

Parameter	Unit	Test 1		
		T1	T2	T3

EPRE ratio of PDCCH DMRS to SSS		dB	4		
EPRE ratio of PDCCH to PDCCH DMRS		dB	0		
EPRE ratio of PBCH DMRS to SSS		dB	0		
EPRE ratio of PBCH to PBCH DMRS		dB			
EPRE ratio of PSS to SSS		dB			
EPRE ratio of PDSCH DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1	dB	1	-7	-15
	Config 2		1	-7	-15
N_{oc}	Config 1	dBm/15 kHz	-98		
	Config 2		-98		
N_{oc}	Config 1	dBm/SCS	-98		
	Config 2		-98		
Propagation condition			TBD		

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 4: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in Figure A.6.5.1C.3.1-1.
Note 5: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6.

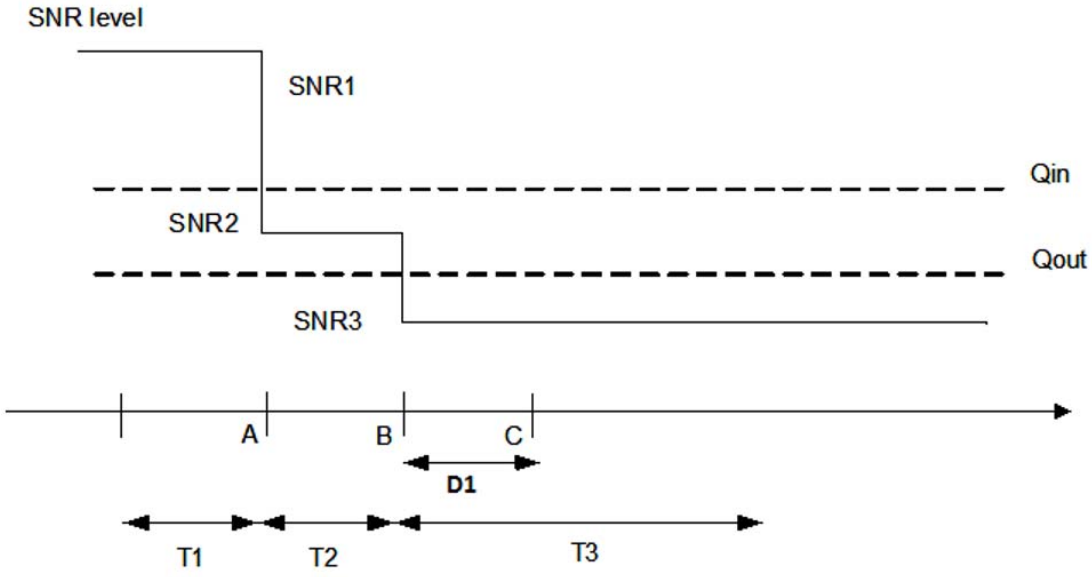

Figure A.14.4.1.3.1-1: SNR variation for out-of-sync testing

A.14.4.1.3.2 Test Requirements

The UE behaviour in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

A.14.4.1.4 Radio Link Monitoring In-sync Test for FR1 SAN PCell configured with SSB-based RLM RS in DRX mode

A.14.4.1.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the SAN PCell when DRX is used. This test will partly verify the FR1 radio link monitoring requirements in clause 8.1C.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0, and *purpose* set to '*rlf*'. Supported test configurations are shown in table A.14.4.1.4.1-1. The test parameters are given in Tables A.14.4.1.4.1-2, and A.14.4.1.4.1-3. There is one cell (Cell 1), which is the active NR cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.14.4.1.4.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

During the test, the test system shall emulate and send the GNSS signal to the test UE. The test parameters for GNSS signals are defined in B.4.1. The UE shall be provided with the valid information about the SAN serving the each cell in the test before the test.

Table A.14.4.1.4.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.4.1.4.1-2: General test parameters for FR1 in-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
NTN reference configuration	Config 1		TBD
	Config 2		TBD
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52
DL initial BWP configuration	Config 1, 2		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2		DLBWP.1.1
UL initial BWP configuration	Config 1, 2		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD

Dedicated CORESET Reference Channel		Config 1		CCR.1.1 FDD
SSB Configuration		Config 1		SSB.1 FR1
SMTC Configuration		Config 1, 2		SMTC.1
PDSCH/PDCCH subcarrier spacing		Config 1, 2		15 kHz
PRACH Configuration		Config 1, 2		Table A.3.8.2.1-1
SSB index assigned as RLM RS				0
OCNG parameters				OP.1
CP length				Normal
Correlation Matrix and Antenna Configuration				2x2 Low
In sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	4
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	0
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
Out of sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	4
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
DRX Configuration				DRX.3
Gap pattern ID				N.A.
Layer 3 filtering				*Enabled*
T310 timer			ms	2000
T311 timer			ms	1000
N310				1
N311				1
CSI-RS configuration for CSI reporting		Config 1		CSI-RS.1.1 FDD
CSI-RS for tracking		Config 1		TRS.1.1 FDD
T1			s	0.2
T2			s	0.2
T3			s	0.64
T4			s	0.2
T5			s	0.88
D1			s	0.84
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.14.4.1.4.1-3: Cell specific test parameters for FR1 (Cell 1) for in-sync radio link monitoring tests in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0				
EPRE ratio of PBCH DMRS to SSS		dB	0				
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1	dB	1	-7	-15	-4.5	1
	Config 2		1	-7	-15	-4.5	1
N_{oc}	Config 1	dBm/15 kHz	-98				
	Config 2		-98				
N_{oc}	Config 1	dBm/SCS	-98				
	Config 2		-98				
Propagation condition			TBD				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 4: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in Figure A.6.5.1C.4.1-1.
Note 5: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 and T4 is modified as specified in clause A.3.6.

Table A.6.5.1C.4.1-4: Void

Table A.6.5.1C.4.1-5: Void

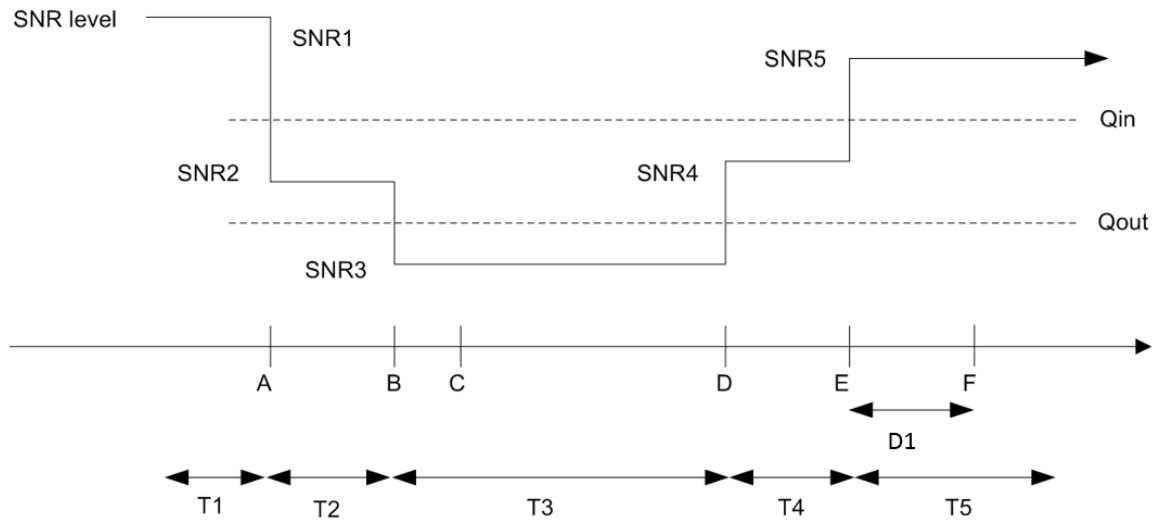

Figure A.14.4.1.4.1-1: SNR variation for in-sync testing.

A.14.4.1.4.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90%.

A.14.4.1.5 Radio Link Monitoring Out-of-sync Test for FR1 SAN PCell configured with CSI-RS-based RLM in non-DRX mode

A.14.4.1.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the SAN PCell when no DRX is used. This test will partly verify the FR1 PCell CSI-RS Out-of-sync radio link monitoring requirements in clause 8.1C.

The test parameters are given in Tables A.14.4.1.5.1-1, A.14.4.1.5.1-2, A.14.4.1.5.1-3, and A.14.4.1.5.1-3A below. There is one cell, cell 1 which is the PCell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.14.4.1.5.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting of 5ms. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test. In the test, SSB0 is configured as the BFD-RS.

During the test, the test system shall emulate and send the GNSS signal to the test UE by AT command. The UE shall be provided with the valid information about the SAN serving cells before the test.

Table A.14.4.1.5.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	GSO, FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	NGSO, FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
Note: If UE supports both NGSO and GSO, the test case Config 1 can be skipped if the UE passes test case Config 2.	

Table A.14.4.1.5.1-2: General test parameters for FR1 PCell for CSI-RS out-of-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Satellite information	Config 1		SSC.1
	Config 2		SSC.2
Duplex mode	Config 1, 2		FDD
DL initial BWP configuration	Config 1, 2		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2		DLBWP.1.1
UL initial BWP configuration	Config 1, 2		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1, 2		CR.1.1 FDD
Dedicated CORESET Reference Channel	Config 1, 2		CCR.1.3 FDD
SSB Configuration	Config 1, 2		SSB.1 FR1
SMTC Configuration	Config 1, 2		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 kHz
TRS configuration	Config 1, 2		TRS.1.1 FDD
CSI-RS for RLM	Config 1, 2		Resource #4 in TRS.1.1 FDD
TCI configuration for PDCCH/PDSCH			TCI.State. 2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4

	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			*OFF*
Gap pattern ID			*gp0*
Layer 3 filtering			*Enabled*
T310 timer		ms	*0*
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1, 2		CSI-RS.1.1 FDD
T1		s	0.2
T2		s	0.48
T3		s	0.48
D1		s	0.44
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.14.4.1.5.1-3: Cell specific test parameters for FR1 for CSI-RS out-of-sync radio link monitoring in non-DRX mode

Parameter		Unit	Test 1		
			T1	T2	T3
EPRE ratio of PDCCH DMRS to SSSPDCCH_beta		dB	4		
EPRE ratio of PDCCH to PDCCH DMRSPDCCH_DMRS_beta		dB			
EPRE ratio of PBCH DMRS to SSSPBCH_beta		dB	0		
EPRE ratio of PBCH to PBCH DMRSPSS_beta		dB			
EPRE ratio of PSS to SSSSSS_beta		dB			
EPRE ratio of PDSCH DMRS to SSS PDSCH_beta		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1, 2	dB	1	-7	-15
N_{oc}	Config 1, 2	dBm/15kHz	-98		
Propagation condition			AWGN		

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.14.4.1.5.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is [A.3.6].

Table A.14.4.1.5.1-3A: Measurement gap configuration for FR1 CSI-RS out-of-sync radio link monitoring in non-DRX mode

Field	Test 1
	Value
gapOffset	0
Note 1: Void	

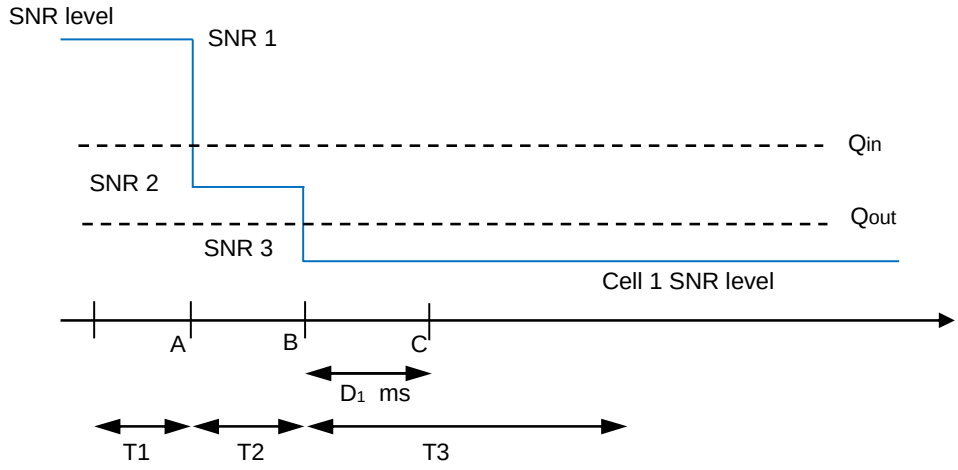

Figure A.14.4.1.5.1-1: SNR variation for CSI-RS out-of-sync testing

A.14.4.1.5.2 Test Requirements

The UE behaviour during time durations T1, T2, and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

The UE shall stop transmitting uplink signal in Cell 1 no later than time point C (D_1 ms after the start of the time duration T3) on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.14.4.1.6 Radio Link Monitoring In-sync Test for FR1 SAN PCell configured with CSI-RS-based RLM in non-DRX mode

A.14.4.1.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the SAN PCell when no DRX is used. This test will partly verify the FR1 PCell CSI-RS In-sync radio link monitoring requirements in clause 8.1C.

The test parameters are given in Tables A.14.4.1.6.1-1, A.14.4.1.6.1-2, and A.14.4.1.6.1-3 below. There is one cells, cell 1 which is the PCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.14.4.1.6.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. In the test, DRX configuration is not enabled. In the test, SSB0 is configured as the BFD-RS.

During the test, the test system shall emulate and send the GNSS signal to the test UE by AT command. The UE shall be provided with the valid information about the SAN serving cells before the test.

Table A.14.4.1.6.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	GSO, FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	NGSO, FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
Note: If UE supports both NGSO and GSO, the test case Config 1 can be skipped if the UE passes test case Config 2.	

Table A.14.4.1.6.1-2: General test parameters for FR1 PCell for CSI-RS in-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Satellite information	Config 1		SSC.1
	Config 2		SSC.2
Duplex mode	Config 1, 2		FDD
DL initial BWP configuration	Config 1, 2		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2		DLBWP.1.1
UL initial BWP configuration	Config 1, 2		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1, 2		CR.1.1 FDD
Dedicated CORESET Reference Channel	Config 1, 2		CCR.1.1 FDD
SSB Configuration	Config 1, 2		SSB.1 FR1
SMTC Configuration	Config 1, 2		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 kHz
TRS configuration	Config 1, 2		TRS.1.1 FDD
CSI-RS for RLM	Config 1, 2		Resource #4 in TRS.1.1 FDD
TCI configuration for PDCCH/PDSCH			TCI.State. 2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6

In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			*OFF*
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*
T310 timer		ms	1000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1, 2		CSI-RS.1.1 FDD
T1		s	0.2
T2		s	0.2
T3		s	0.44
T4		s	0.2
T5		s	0.88
T6		S	0.84
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.14.4.1.6.1-3: Cell specific test parameters for FR1 for CSI-RS in-sync radio link monitoring in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSSPDCCH_beta		dB	4				
EPRE ratio of PDCCH to PDCCH DMRSPDCCH_DMRS_beta		dB					
EPRE ratio of PBCH DMRS to SSSPBCH_beta		dB	0				
EPRE ratio of PBCH to PBCH DMRSPSS_beta		dB					
EPRE ratio of PSS to SSSSSS_beta		dB					
EPRE ratio of PDSCH DMRS to SSS PDSCH_beta		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1, 2	dB	1	-7	-15	-4.5	1
N_{oc}	Config 1, 2	dBm/15kHz	-98				
Propagation condition			AWGN				

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure A.14.4.1.6.1-1.
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is specified in clause A.3.6.1.1.

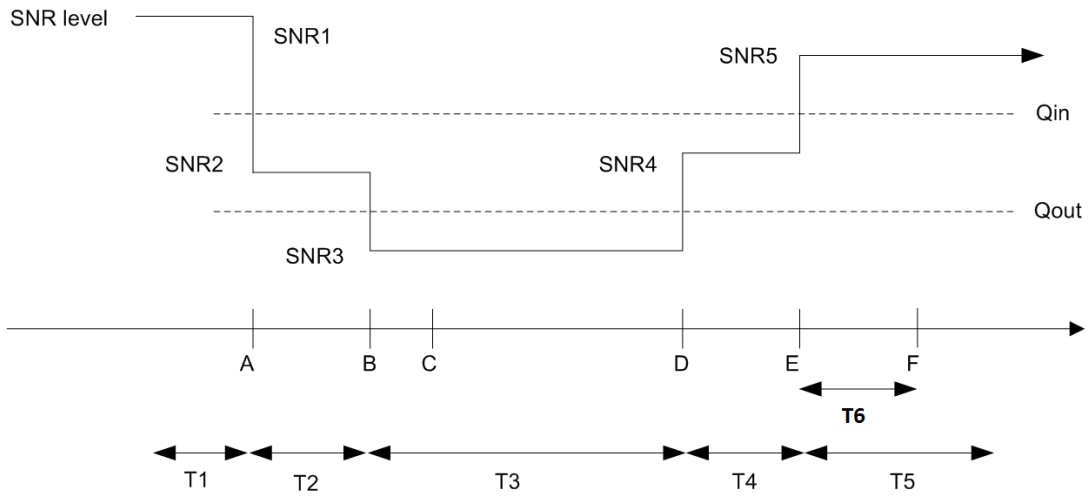

Figure A.14.4.1.6.1-1: SNR variation for CSI-RS in-sync testing

A.14.4.1.6.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (T6 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.14.4.1.7 Radio Link Monitoring Out-of-sync Test for FR1 SAN PCell configured with CSI-RS-based RLM in DRX mode

A.14.4.1.7.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the SAN PCell when DRX is used. This test will partly verify the FR1 PCell CSI-RS Out-of-sync radio link monitoring requirements in clause 8.1C.

The test parameters are given in Tables A.14.4.1.7.1-1, A.14.4.1.7.1-2, and A.6.5.1.7C.1-3 below. There is one cell, cell 1 is the PCell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.14.4.1.7.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be

configured for periodic CSI reporting with a reporting periodicity of 5ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test. In the test, SSB0 is configured as the BFD-RS.

During the test, the test system shall emulate and send the GNSS signal to the test UE by AT command. The UE shall be provided with the valid information about the SAN serving cells before the test.

Table A.14.4.1.7.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	GSO, FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	NGSO, FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
Note: If UE supports both NGSO and GSO, the test case Config 1 can be skipped if the UE passes test case Config 2.	

Table A.14.4.1.7.1-2: General test parameters for FR1 PCell for CSI-RS out-of-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Satellite information	Config 1		SSC.1
	Config 2		SSC.2
Duplex mode	Config 1, 2		FDD
DL initial BWP configuration	Config 1, 2		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2		DLBWP.1.1
UL initial BWP configuration	Config 1, 2		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1, 2		CR.1.1 FDD
Dedicated CORESET Reference Channel	Config 1, 2		CCR.1.3 FDD
SSB Configuration	Config 1, 2		SSB.1 FR1
SMTC Configuration	Config 1, 2		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 kHz
TRS configuration	Config 1, 2		TRS.1.1 FDD
CSI-RS for RLM	Config 1, 2		Resource #4 in TRS.1.1 FDD
TCI configuration for PDCCH/PDSCH			TCI.State. 2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4

	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			DRX.3
Gap pattern ID			N.A.
Layer 3 filtering			Enabled
T310 timer		ms	0
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1, 2		CSI-RS.1.1 FDD
T1		s	0.2
T2		s	1.28
T3		s	1.28
D1		s	1.24
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.14.4.1.7.1-3: Cell specific test parameters for FR1 for CSI-RS out-of-sync radio link monitoring in DRX mode

Parameter		Unit	Test 1		
			T1	T2	T3
EPRE ratio of PDCCH DMRS to SSSPDCCH_beta		dB	4		
EPRE ratio of PDCCH to PDCCH DMRSPDCCH_DMRS_beta		dB	4		
EPRE ratio of PBCH DMRS to SSSPBCH_beta		dB	0		
EPRE ratio of PBCH to PBCH DMRSPSS_beta		dB			
EPRE ratio of PSS to SSSSSS_beta		dB			
EPRE ratio of PDSCH DMRS to SSS PDSCH_beta		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1, 2	dB	1	-7	-15
N_{oc}	Config 1, 2	dBm/15kHz	-98		
Propagation condition			AWGN		

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8:	The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.14.4.1.7.1-1.
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is specified in clause A.3.6.1.1.

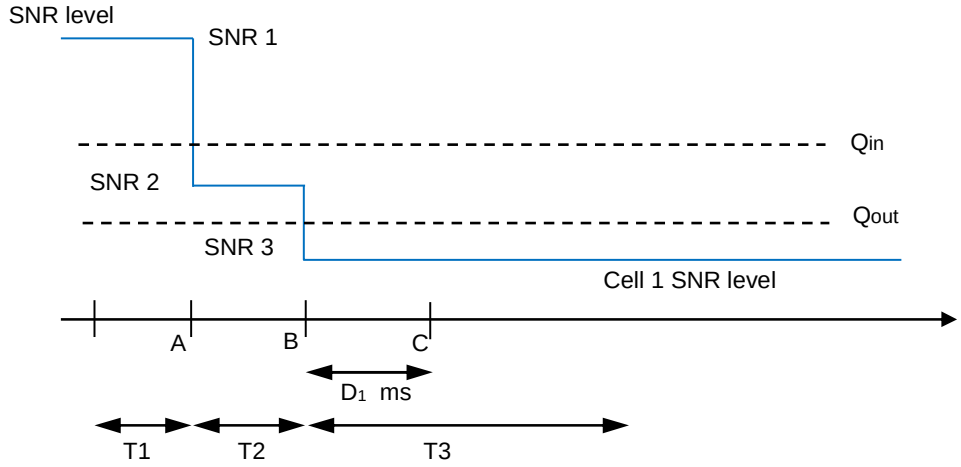

Figure A.14.4.1.7.1-1: SNR variation for CSI-RS out-of-sync testing

A.14.4.1.7.2 Test Requirements

The UE behaviour during time durations T1, T2, and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 (PCell) at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

The UE shall stop transmitting uplink signal in Cell 1 (PCell) no later than time point C (D_1 ms after the start of the time duration T3) on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.14.4.1.8 Radio Link Monitoring In-sync Test for FR1 SAN PCell configured with CSI-RS-based RLM in DRX mode

A.14.4.1.8.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the SAN PCell when DRX is used. This test will partly verify the FR1 Pcell CSI-RS In-sync radio link monitoring requirements in clause 8.1C.

The test parameters are given in Tables A.14.4.1.8.1-1, A.14.4.1.8.1-2, A.14.4.1.8.1-3 and A.14.4.1.8.1-3A below. There is one cells, cell 1 which is the PCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.14.4.1.8.1-1 shows the variation of the downlink SNR in

the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test. In the test, SSB0 is configured as the BFD-RS.

During the test, the test system shall emulate and send the GNSS signal to the test UE by AT command. The UE shall be provided with the valid information about the SAN serving cells before the test.

Table A.14.4.1.8.1-1: Supported test configurations for FR1 PSCell

Configuration	Description
1	GSO, FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	NGSO, FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
Note: If UE supports both NGSO and GSO, the test case Config 1 can be skipped if the UE passes test case Config 2.	

Table A.14.4.1.8.1-2: General test parameters for FR1 PCell for CSI-RS in-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Satellite information	Config 1		SSC.1
	Config 2		SSC.2
Duplex mode	Config 1, 2		FDD
DL initial BWP configuration	Config 1, 2		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2		DLBWP.1.1
UL initial BWP configuration	Config 1, 2		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1, 2		CR.1.1 FDD
Dedicated CORESET Reference Channel	Config 1, 2		CCR.1.1 FDD
SSB Configuration	Config 1, 2		SSB.1 FR1
SMTC Configuration	Config 1, 2		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 kHz
TRS configuration	Config 1, 2		TRS.1.1 FDD
CSI-RS for RLM	Config 1, 2		Resource #4 in TRS.1.1 FDD
TCI configuration for PDCCH/PDSCH			TCI.State. 2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4

	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			DRX.3
Gap pattern ID			gp0
Layer 3 filtering			Enabled
T310 timer		ms	2000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1, 2		CSI-RS.1.1 FDD
T1		s	0.2
T2		s	0.2
T3		s	1.24
T4		s	0.2
T5		s	1.88
T6		s	1.84
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.14.4.1.8.1-3: Cell specific test parameters for FR1 for CSI-RS in-sync radio link monitoring in non-DRX mode

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSSPDCCH_beta	dB	4				
EPRE ratio of PDCCH to PDCCH DMRSPDCCH_DMRS_beta	dB					
EPRE ratio of PBCH DMRS to SSSPBCH_beta	dB	0				
EPRE ratio of PBCH to PBCH DMRSPSS_beta	dB					
EPRE ratio of PSS to SSSSSS_beta	dB					
EPRE ratio of PDSCH DMRS to SSS PDSCH_beta	dB					
EPRE ratio of PDSCH to PDSCH DMRS	dB					
EPRE ratio of OCNG DMRS to SSS	dB					
EPRE ratio of OCNG to OCNG DMRS	dB					

SNR on RLM-RS	Config 1, 2	dB	1	-7	-15	-4.5	1
N_{oc}	Config 1, 2	dBm/15kHz	-98				
Propagation condition			AWGN				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure A.14.4.1.8.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is specified in clause A.3.6.1.1.

Table A.6.5.1.8.1-3A: Measurement gap configuration for FR1 CSI-RS in-sync radio link monitoring in non-DRX mode

Field	Test 1
	Value
gapOffset	0
Note 1: Void	

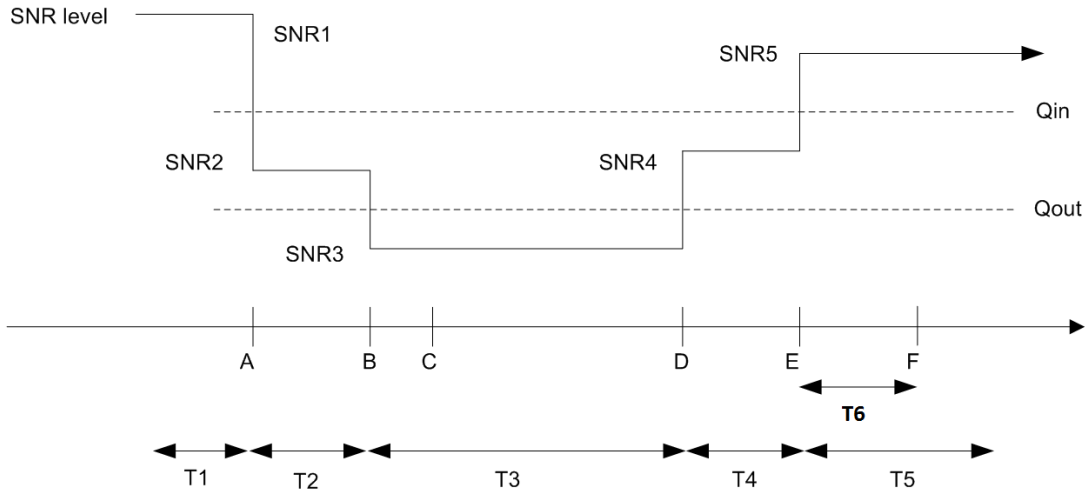

Figure A.14.4.1.8.1-1: SNR variation for CSI-RS in-sync testing

A.14.4.1.8.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (T6 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.14.4.2 Beam Failure Detection and Link recovery procedures for satellite access

A.14.4.2.1 Beam Failure Detection and Link Recovery Test for FR1 PCell for satellite access configured with SSB-based BFD and LR in non-DRX mode

A.14.4.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q0 configured for a serving cell which is served by satellite access node (SAN) and that the UE performs correct SSB-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.14.4.2.1.1-1, A.14.4.2.1.1-2, A.14.4.2.1.1-3 and A.14.4.2.1.1-4 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.14.4.2.1.1-1 shows the variation of the downlink SNR of the SSB in set q_0 in the active cell to emulate SSB based beam failure. Figure A.14.4.2.1.1-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test 1.

Table A.14.4.2.1.1-1: Supported test configurations for FR1 Pcell

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.4.2.1.1-2: General test parameters for FR1 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Value	Comment
			Test 1	
NTN reference Serving satellite configuration	Config 1		SSC.1	
	Config 2		SSC.2	
Active PSCell			Cell 1	
RF Channel Number			1	
Duplex mode	Config 1,2		FDD	
BWchannel	Config 1,2	MHz	10: NRB,c = 52	
DL initial BWP configuration	Config 1,2		DLBWP.0.1	
DL dedicated BWP configuration	Config 1,2		DLBWP.1.1	
UL initial BWP configuration	Config 1,2		ULBWP.0.1	
UL dedicated BWP configuration	Config 1,2		ULBWP.1.1	
TDD Configuration	Config 1,2		Not Applicable	

RMSI CORESET Reference Channel	Config 1,2		CR.1.1 FDD	
Dedicated CORESET Reference Channel	Config 1,2		CCR.1.1 FDD	
SSB Configuration	Config 1,2		SSB.3 FR1	
SMTC Configuration	Config 1,2		SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1,2		15 KHz	
PRACH Configuration	Config 1,2		Table A.3.8.2.2-1	
SSB Index assigned as BFD RS (q_0)			0	
SSB Index assigned as CBD RS (q_1)			1	
OCNG parameters			OP.1	
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			OFF	
Gap pattern ID			gp0	
gapOffset			0	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1, 2	dBm/ SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS

beamFailureInstanceMaxCount			n1	see clause 5.17 of TS 38.321 [7]
beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [7]
CSI-RS configuration for CSI reporting	Config 1,2		CSI-RS.1.1 FDD	
CSI-RS for tracking	Config 1,2		TRS.1.1 FDD	
SSB Index assigned as RLM RS			0, 1	
T310 Timer		ms	1000	
N310			2	
T1		s	0.2	During this time the the UE shall be fully synchronized to cell 1
T2		s	0.37	
T3		s	0.24	
T4		s	0	
T5		s	0.17	
D1		s	0.13	
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.14.4.2.1.1-3: Cell specific test parameters for FR1 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q_0	Config 1,2	dB	5	-3	-12	-12	-12
SNR_SSB of set q_1	Config 1,2	dB	-10	-10	10	10	10
SSB_RP of set q_1	Config 1,2	dBm/SCS kHz	-108	-108	-88	-88	-88
N_{oc}	Config 1,2	dBm/15 KHz	-98				
Propagation condition			AWGN				

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.

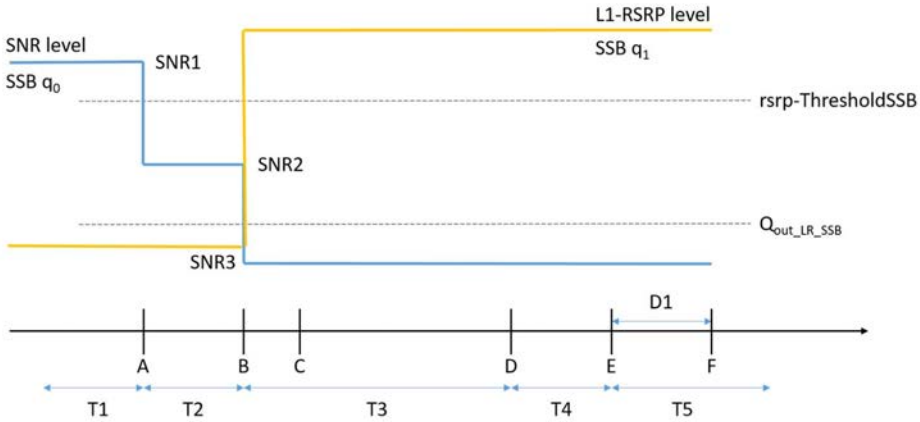

Figure A.14.4.2.1.1-1: SNR and L1-RSRP variation SSB for SSB-based beam failure detection and link recovery testing in non-DRX mode

A.14.4.2.1.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 120+10 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.14.4.2.2 Beam Failure Detection and Link Recovery Test for FR1 PCell for satellite access configured with SSB-based BFD and LR in DRX mode

A.14.4.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving cell which is served by satellite access node (SAN) and that the UE performs correct SSB-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.14.4.2.2.1-1, A.14.4.2.2.1-2, A.14.4.2.2.1-3, A.14.4.2.2.1-4 and A.14.4.2.2.1-5 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.14.4.2.2.1-1 shows the variation of the downlink SNR of the SSB in set q_0 in the active cell to emulate SSB based beam failure. Figure A.14.4.2.2.1-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

Table A.14.4.2.2.1-1: Supported test configurations for FR1 Pcell

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.4.2.2.1-2: General test parameters for FR1 PCell for SSB-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Value	Comment
			Test 1	
NTN reference Serving satellite configuration	Config 1		SSC.1	
	Config 2		SSC.2	
Active PSCell			Cell 1	
RF Channel Number			1	
Duplex mode	Config 1,2		FDD	
BWchannel	Config 1,2	MHz	10: NRB,c = 52	
DL initial BWP configuration	Config 1,2		DLBWP.0.1	
DL dedicated BWP configuration	Config 1,2		DLBWP.1.1	
UL initial BWP configuration	Config 1,2		ULBWP.0.1	
UL dedicated BWP configuration	Config 1,2		ULBWP.1.1	
TDD Configuration	Config 1,2		Not Applicable	

RMSI CORESET Reference Channel	Config 1,2		CR.1.1 FDD	
Dedicated CORESET Reference Channel	Config 1,2		CCR.1.1 FDD	
SSB Configuration	Config 1,2		SSB.3 FR1	
SMTC Configuration	Config 1,2		SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1,2		15 KHz	
PRACH Configuration	Config 1,2		Table A.3.8.2.2-1	
SSB Index assigned as BFD RS (q_0)			0	
SSB Index assigned as CBD RS (q_1)			1	
OCNG parameters			OP.1	
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			DRX.7	A.3.3.7
Gap pattern ID			N.A.	
rlmInSyncOutOfSyncThreshold			Absent	When the field is absent, the UE applies the value 0.

				(Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1,2	dBm/ SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see clause 5.17 of TS 38.321 [7]
beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [7]
CSI-RS configuration for CSI reporting	Config 1,2		CSI-RS.1.1 FDD	
CSI-RS for tracking	Config 1,2		TRS.1.1 FDD	
SSB Index assigned as RLM RS			0, 1	
T310 Timer		ms	1000	
N310			2	
T1		s	1	During this time the the UE shall be fully synchronized to cell 1
T2		s	5.17	
T3		s	3.24	
T4		s	0	
T5		s	1.97	
D1		s	1.93	
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.14.4.2.2.1-3: Cell specific test parameters for FR1 PCell for SSB-based beam failure detection and link recovery testing in DRX mode

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS	dB	0				
EPRE ratio of PDCCH to PDCCH DMRS	dB					
EPRE ratio of PBCH DMRS to SSS	dB					
EPRE ratio of PBCH to PBCH DMRS	dB					
EPRE ratio of PSS to SSS	dB					
EPRE ratio of PDSCH DMRS to SSS	dB					
EPRE ratio of PDSCH to PDSCH DMRS	dB					
EPRE ratio of OCNG DMRS to SSS	dB					
EPRE ratio of OCNG to OCNG DMRS	dB					

SNR_SSB of set q_0	Config 1,2	dB	5	-3	-12	-12	-12
SNR_SSB of set q_1	Config 1,2	dB	-10	-10	10	10	10
SSB_RP of set q_1	Config 1,2	dBm/SCS kHz	-108	-108	-88	-88	-88
N_{oc}	Config 1,2	dBm/15 KHz	-98				
Propagation condition			AWGN				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Void
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.

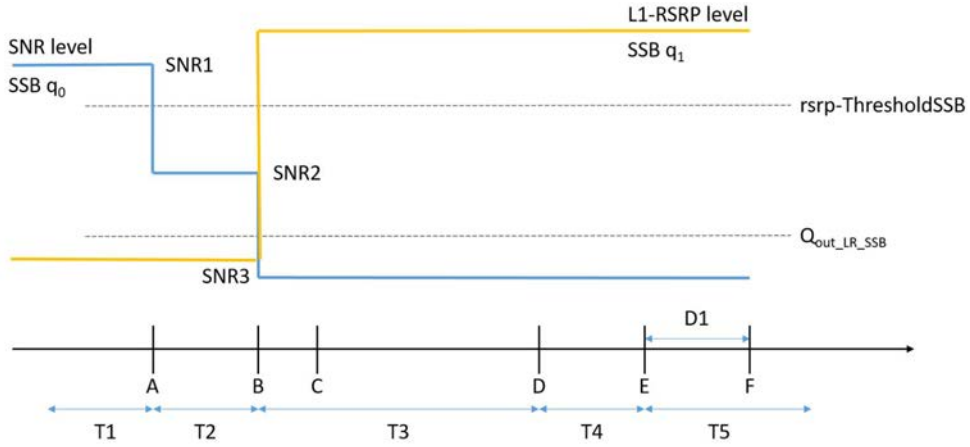

Figure A.14.4.2.2.1-1: SNR and L1-RSRP variation for SSB-based beam failure detection and link recovery testing in non-DRX mode

A.14.4.2.2.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 1920+10 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.14.4.2.3 Beam Failure Detection and Link Recovery Test for FR1 PCell for satellite access configured with CSI-RS-based BFD and LR in non-DRX mode

A.14.4.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell which is served by satellite access node (SAN) and that the UE performs correct CSI-RS-based link recovery based on beam candicate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.14.4.2.3.1-1, A.14.4.2.3.1-2, and below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.14.4.2.3.1-1 shows the variation of the downlink SNR of the CSI-RS in set q_0 in the active cell to emulate CSI-RS based beam failure. Figure A.14.4.2.3.1-1 additionally shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled.

Table A.14.4.2.3.1-1: Supported test configurations for FR1 Pcell

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.4.2.3.1-2: General test parameters for FR1 PCell for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Value	Comment
			Test 1	
NTN reference Serving satellite configuration	Config 1		SSC.1	
	Config 2		SSC.2	
Active PCell			Cell 1	
RF Channel Number			1	
Duplex mode	Config 1,2		FDD	
TDD Configuration	Config 1,2		Not Applicable	
RMSI CORESET Reference Channel	Config 1,2		CR.1.1 FDD	A.3.1.2
Dedicated CORESET Reference Channel	Config 1,2		CCR.1.1 FDD	A.3.1.3
SSB Configuration	Config 1,2		SSB.3 FR1	A.3.10

SSB Configuration	Config 1,2		SSB. 3 FR1	A.3.10
SMTC Configuration	Config 1,2		SMTC.1	A.3.11
PDSCH/PDCCH subcarrier spacing	Config 1,2		15 KHz	
PRACH Configuration	Config 1,2		FR1 PRACH configuration 4	A.3.8.2
csi-RS-Index assigned as beam failure detection RS in set q_0			0	
OCNG parameters			OP.1	A.3.2.1
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			OFF	
Gap pattern ID			N.A.	
csi-RS-Index assigned as candidate beam detection RS in set q_1			1	N
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1,2	dBm/SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see clause 5.17 of TS 38.321 [7]
beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [7]
CSI-RS configuration for q_0 and q_1	Config 1,2		CSI-RS.1.2 FDD	A.3.14
CSI-RS configuration for CSI reporting	Config 1,2		CSI-RS.1.1 FDD	A.3.14
TRS configuration	Config 1,2		TRS.1.1 FDD	
CSI-RS-Index assigned as RLM RS	Config 1,2		CSI-RS.1.2 FDD	A.3.14
T310 Timer		ms	1000	

N310		2	
T1	s	0.2	During this time the the UE shall be fully synchronized to cell 1
T2	s	0.18	
T3	s	0.14	
T4	s	0	
T5	s	0.08	
D1	s	0.04	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.14.4.2.3.1-3 Cell specific test parameters for FR1 PCell for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set q_0	Config 1,2	dB	5	-3	-12	-12	-12
SNR_CSI-RS of set q_1	Config 1,2	dB	-10	-10	10	10	10
CSI-RS_RP of set q_1	Config 1,2	dBm/SCS kHz	-108	-108	-88	-88	-88
N_{oc}	Config 1,2	dBm/15 KHz	-98				
Propagation condition			AWGN				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Void
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.

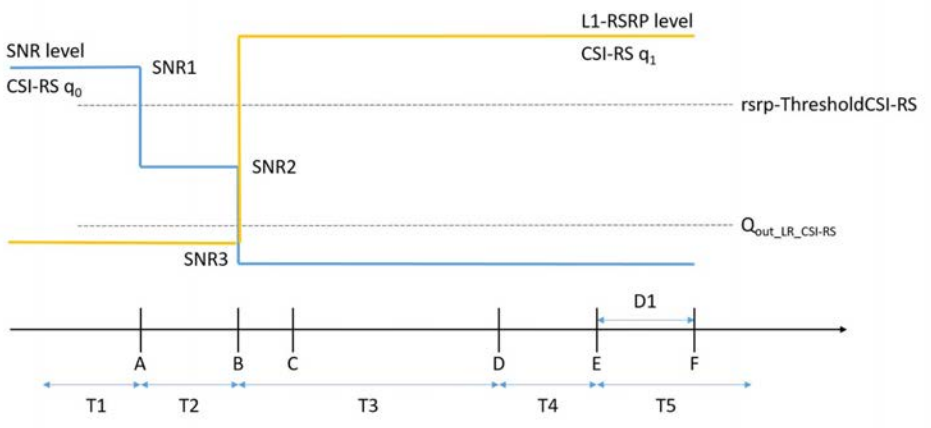

Figure A.14.4.2.3.1-1: SNR and L1-RSRP variation for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

A.14.4.2.3.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the shall detect beam failure and initiat link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 30+10 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.14.4.2.4 Beam Failure Detection and Link Recovery Test for FR1 PCell for satellite access configured with CSI-RS-based BFD and LR in DRX mode

A.14.4.2.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell which is served by satellite access node (SAN) and that the UE performs correct CSI-RS-based link recovery based on beam candicate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.14.4.2.4.1-1, A.14.4.2.4.1-2, A.14.4.2.4.1-3, and A.14.4.2.4.1-4 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.14.4.2.4.1-1 shows the variation of the downlink SNR of the CSI-RS in set q_0 in the active cell to emulate CSI-RS based beam failure. Figure A.14.4.2.4.1-1 additionally shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in PCell and

DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

Table A.14.4.2.4.1-1: Supported test configurations for FR1 Pcell

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.4.2.4.1-2: General test parameters for FR1 PCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Value	Comment
			Test 1	
NTN reference Serving satellite configuration	Config 1		SSC.1	
	Config 2		SSC.2	
Active PCell			Cell 1	
RF Channel Number			1	
Duplex mode	Config 1,2		FDD	
TDD Configuration	Config 1,2		Not Applicable	
RMSI CORESET Reference Channel	Config 1,2		CR.1.1 FDD	A.3.1.2
Dedicated CORESET Reference Channel	Config 1,2		CCR.1.1 FDD	A.3.1.3
SSB Configuration	Config 1,2		SSB. 3 FR1	A.3.10
SMTC Configuration	Config 1,2		SMTC.1	A.3.11
PDSCH/PDCCH subcarrier spacing	Config 1,2		15 KHz	
PRACH Configuration	Config 1,2		FR1 PRACH configuration 4	A.3.8.2
csi-RS-Index assigned as beam failure detection RS in set q_0			0	
OCNG parameters			OP.1	A.3.2.1
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS	dB	0	

		energy to average CSI-RS RE energy			
		DMRS precoder granularity		REG bundle size	
		REG bundle size		6	
DRX				DRX.7	A.3.3.7
Gap pattern ID				N.A.	
csi-RS-Index assigned as candidate beam detection RS in set q_1				1	
rlmInSyncOutOfSyncThreshold				absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1,2		dBm/SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS				db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount				n1	see clause 5.17 of TS 38.321 [7]
beamFailureDetectionTimer				pbfd4	see clause 5.17 of TS 38.321 [7]
CSI-RS configuration for q_0 and q_1	Config 1,2			CSI-RS.1.2 FDD	A.3.14.1
CSI-RS configuration for CSI reporting	Config 1,2			CSI-RS.1.1 FDD	A.3.14.1
TRS configuration	Config 1,2			TRS.1.1 FDD	
CSI-RS-Index assigned as RLM RS	Config 1,2			CSI-RS.1.2 FDD	
T310 Timer			ms	1000	
N310				2	
T1			s	1	During this time the the UE shall be fully synchronized to cell 1
T2			s	8.37	
T3			s	6.44	
T4			s	0	
T5			s	1.97	
D1			s	1.93	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.					

Table A.14.4.2.4.1-3: Cell specific test parameters for FR1 PCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS	dB	0				
EPRE ratio of PDCCH to PDCCH DMRS	dB					
EPRE ratio of PBCH DMRS to SSS	dB					
EPRE ratio of PBCH to PBCH DMRS	dB					
EPRE ratio of PSS to SSS	dB					
EPRE ratio of PDSCH DMRS to SSS	dB					
EPRE ratio of PDSCH to PDSCH DMRS	dB					
EPRE ratio of OCNG DMRS to SSS	dB					
EPRE ratio of OCNG to OCNG DMRS	dB					

SNR_CSI-RS of set q_0	Config 1	dB	5	-3	-12	-12	-12
SNR_CSI-RS of set q_1	Config 1	dB	-10	-10	10	10	10
CSI-RS_RP of set q_1	Config 1	dB/SCS kHz	-110	-110	-88	-88	-88
N_{oc}	Config 1	dBm/15 KHz	-98				
Propagation condition			AWGN				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Void
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.

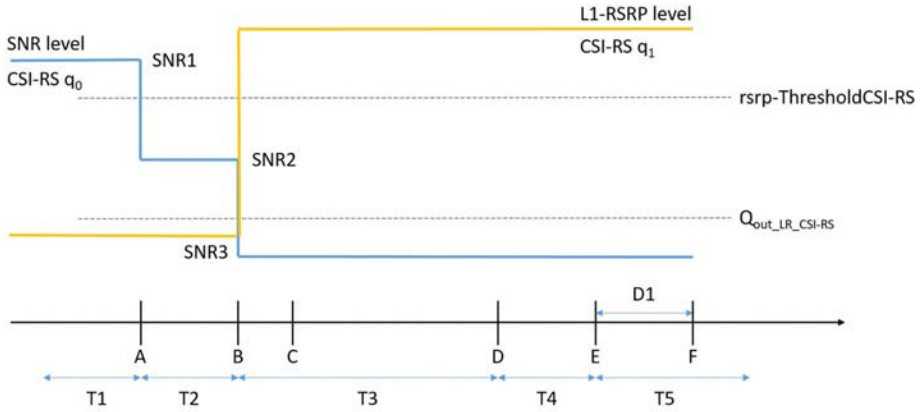

Figure A.14.4.2.4.1-1: SNR and L1-RSRP variation for CSI-RS-based beam failure detection and link recovery testing in DRX mode

A.14.4.2.4.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the shall detect beam failure and initiat link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 1920+10 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.14.4.2.5 Beam Failure Detection and Link Recovery Test for FR1 SCell for satellite access configured with CSI-RS-based BFD and SSB-based LR in non-DRX mode

A.14.4.2.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell which is served by satellite access node (SAN) and that the UE performs correct SSB-based link recovery based on beam candicate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP without *schedulingRequestID-BFR-SCell-r16* configuration, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.14.4.2.5.1-1, A.14.4.2.5.1-2, and below. There are two cells, cell 1 is the PCell and cell 2 is the SCell, in the test. UE is not provided by *schedulingRequestID-BFR-SCell-r16*, i.e., no configuration for PUCCH transmission resources, and UE shall perform the random access procedure to recover the beam failure. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.14.4.2.5.1-1 shows the SNR of the CSI-RS in set q_0 in the active SCell to emulate beam failure. Figure A.14.4.2.5.1-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled.

Table A.14.4.2.5.1-1: Supported test configurations for FR1 PCell and Scell

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.4.2.5.1-2: General test parameters for FR1 SCell for beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Value	Comment
			Test 1	
NTN reference Serving satellite configuration	Config 1		SSC.1	
	Config 2		SSC.2	
Active PCell			Cell 1	
RF Channel Number for PCell			1	
Active SCell			Cell 2	
RF Channel Number for SCell			2	
Duplex mode	Config 1,2		FDD	

BW channel	Config 1,2		10: NRB,c = 52	
TDD Configuration	Config 1,2		Not Applicable	
CORESET Reference Channel	Config 1,2		CR.1.1 FDD	A.3.1.2
SSB Configuration	Config 1,2		SSB.1 FR1	A.3.10
SMTC Configuration	Config 1,2		SMTC.1	A.3.11
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15	
PRACH Configuration	Config 1,2		Table A.3.8.2.2-1	
csi-RS-Index assigned as beam failure detection RS in set q_0 in activated SCell			0	
OCNG parameters			OP.1	A.3.2.1
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			OFF	
Gap pattern ID			N.A.	
schedulingRequestID-BFR-SCell-r16			absent	When the field is absent, the random access procedure will be triggered for SCell BFR
SSB Index assigned as CBD RS (q1) in activated SCell			0	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).

rsrp-ThresholdBFR	Config 1,2	dBm/SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see clause 5.17 of TS 38.321 [7]
beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [7]
CSI-RS configuration for q_0 in activated SCell	Config 1,2		CSI-RS.1.2 FDD	A.3.14
CSI-RS configuration for CSI reporting	Config 1,2		CSI-RS.1.1 FDD	A.3.14
TRS configuration	Config 1,2		TRS.1.1 FDD	
CSI-RS-Index assigned as RLM RS in PCell	Config 1,2		CSI-RS.1.2 FDD	A.3.14
T310 Timer		ms	1000	
N310			2	
T1		s	0.2	During this time the the UE shall be fully synchronized to cell 1
T2		s	0.18	
T3		s	0.14	
T4		s	0	
T5		s	0.17	
D1		s	0.13	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.14.4.2.5.1-3: Cell specific test parameters for FR1 SCell for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

Parameter	Unit	Cell1	Test 1 Cell2				
		T1 to T5	T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS	dB	0	0				
EPRE ratio of PDCCH to PDCCH DMRS	dB						
EPRE ratio of PBCH DMRS to SSS	dB						
EPRE ratio of PBCH to PBCH DMRS	dB						
EPRE ratio of PSS to SSS	dB						
EPRE ratio of PDSCH DMRS to SSS	dB						
EPRE ratio of PDSCH to PDSCH DMRS	dB						
EPRE ratio of OCNG DMRS to SSS	dB						
EPRE ratio of OCNG to OCNG DMRS	dB						

SNR_CSI-RS of set q_0	Config 1,2	dB	5	5	-3	-12	-12	-12
SNR_SSB of set q_1	Config 1,2	dB	-10	-10	-10	10	10	10
SSB_RP of set q_1	Config 1,2	dBm/	-108	-108	-108	-88	-88	-88
N_{oc}	Config 1,2	dBm/15 KHz	-98	-98				
Propagation condition			AWGN	AWGN				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Void
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.

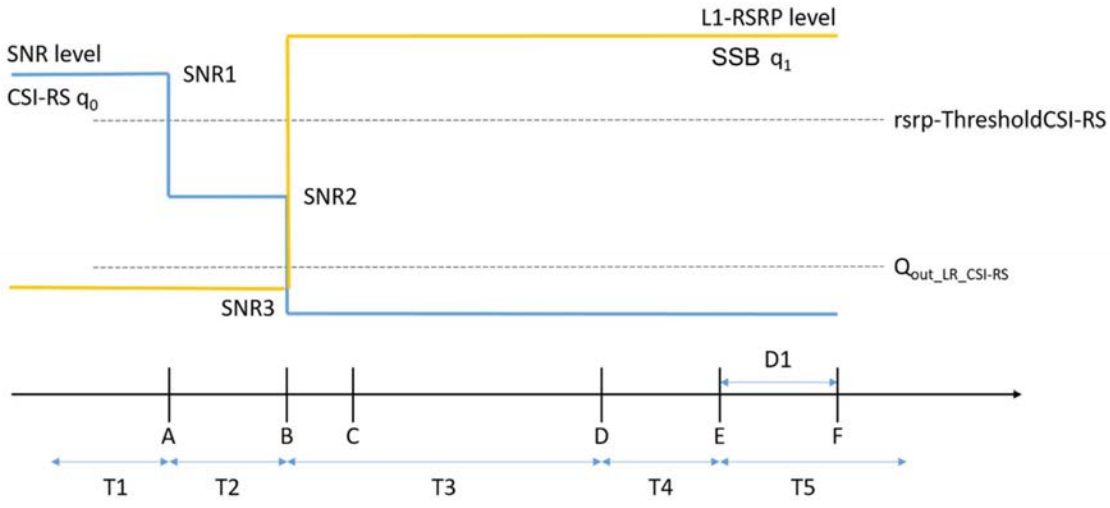

Figure A.14.4.2.5.1-1: SNR and L1-RSRP variation for beam failure detection and link recovery testing in for SCell non-DRX mode

A.14.4.2.5.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the shall detect beam failure and initiat link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 120+10 ms after the start of T5, the UE shall transmit preamble for UL-SCH resource application, followed by MAC-CE on the assigned uplink resources containing a beam associated with the candidate beam set q_1. The UE shall not transmit preamble earlier than time point B.

During T5, the System Simulator shall transmit a Random Access Response to UE after the System Simulator receives the preamble from UE. The UE shall transmit the msg.3 containing candidate beam set q1 for SCell BFR if UE receives the Random Access Response.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.14.4.2.6 Beam Failure Detection and Link Recovery Test for FR1 SCell for satellite access configured with CSI-RS-based BFD and SSB-based LR in DRX mode

A.14.4.2.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell which is served by satellite access node (SAN) and that the UE performs correct SSB-based link recovery based on beam candicate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP without *schedulingRequestID-BFR-SCell-r16* configuration, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.14.4.2.6.1-1, A.14.4.2.6.1-2, A.14.4.2.6.1-3, and A.14.4.2.6.1-4 below. There are two cells, cell 1 is the PCell and cell 2 is the SCell, in the test. UE is not provided by *schedulingRequestID-BFR-SCell-r16*, i.e., no configuration for PUCCH transmission resources, and UE shall perform the random access procedure to recover the beam failure. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.14.4.2.6.1-1 shows the SNR of the CSI-RS in set q_0 in the active SCell to emulate beam failure. Figure A.14.4.2.6.1-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in SCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.14.4.2.6.1-1: Supported test configurations for FR1 PCell and Scell

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.4.2.6.1-2: General test parameters for FR1 SCell for beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Value	Comment
			Test 1	
NTN reference Serving satellite configuration	Config 1		SSC.1	
	Config 2		SSC.2	
Active PCell			Cell 1	

RF Channel Number for PCell			1	
Active SCell			Cell 2	
RF Channel Number for SCell			2	
Duplex mode	Config 1,2		FDD	
BW channel	Config 1,2	MHz	10: NRB,c = 52	
TDD Configuration	Config 1,2		Not Applicable	
CORESET Reference Channel	Config 1,2		CR.1.1 FDD	A.3.1.2
SSB Configuration	Config 1,2		SSB.1 FR1	A.3.10
SMTC Configuration	Config 1,2		SMTC.1	A.3.11
PDSCH/PDCCH subcarrier spacing	Config 1,2		15 KHz	
PRACH Configuration	Config 1,2		Table A.3.8.2.1-1	
csi-RS-Index assigned as beam failure detection RS in set q_0 in activated SCell			0	
OCNG parameters			OP.1	A.3.2.1
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			DRX.7	A.3.3.7
Gap pattern ID			N.A.	
schedulingRequestID-BFR-SCell-r16			absent	When the field is absent, the random access procedure will be triggered for SCell BFR
SSB Index assigned as CBD RS (q1) in activated SCell			0	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value

				0. (Table 8.1.1-1).
rsrp-ThresholdBFR	Config 1,2	dBm/SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see clause 5.17 of TS 38.321 [7]
beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [7]
CSI-RS configuration for q_0 in activated SCell	Config 1,2		CSI-RS.1.2 FDD	A.3.14.1
CSI-RS configuration for CSI reporting	Config 1,2		CSI-RS.1.1 FDD	A.3.14.1
TRS configuration	Config 1,2		TRS.1.1 FDD	
CSI-RS-Index assigned as RLM RS in PCell	Config 1,2		CSI-RS.1.2 FDD	
T310 Timer		ms	1000	
N310			2	
T1		s	1	During this time the the UE shall be fully synchronized to cell 1
T2		s	8.37	
T3		s	6.44	
T4		s	0	
T5		s	1.97	
D1		s	1.93	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.14.4.2.6.1-3: Cell specific test parameters for FR1 SCell for beam failure detection and link recovery testing in DRX mode

Parameter	Unit	Cell 1	Test 1 Cell2				
		T1 to T5	T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS	dB	0	0				
EPRE ratio of PDCCH to PDCCH DMRS	dB						
EPRE ratio of PBCH DMRS to SSS	dB						
EPRE ratio of PBCH to PBCH DMRS	dB						
EPRE ratio of PSS to SSS	dB						
EPRE ratio of PDSCH DMRS to SSS	dB						
EPRE ratio of PDSCH to PDSCH DMRS	dB						
EPRE ratio of OCNG DMRS to SSS	dB						
EPRE ratio of OCNG to OCNG DMRS	dB						

SNR_CSI-RS of set q_0	Config 1,2	dB	5	5	-3	-12	-12	-12
SNR_SSB of set q_1	Config 1,2	dB	-10	-10	-10	10	10	10
SSB_RP of set q_1	Config 1,2	dBm/ SCS kHz	-110	-110	-110	-88	-88	-88
N_{oc}	Config 1,2	dBm/15 kHz	-98	-98				
Propagation condition			AWGN	AWGN				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Void
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.

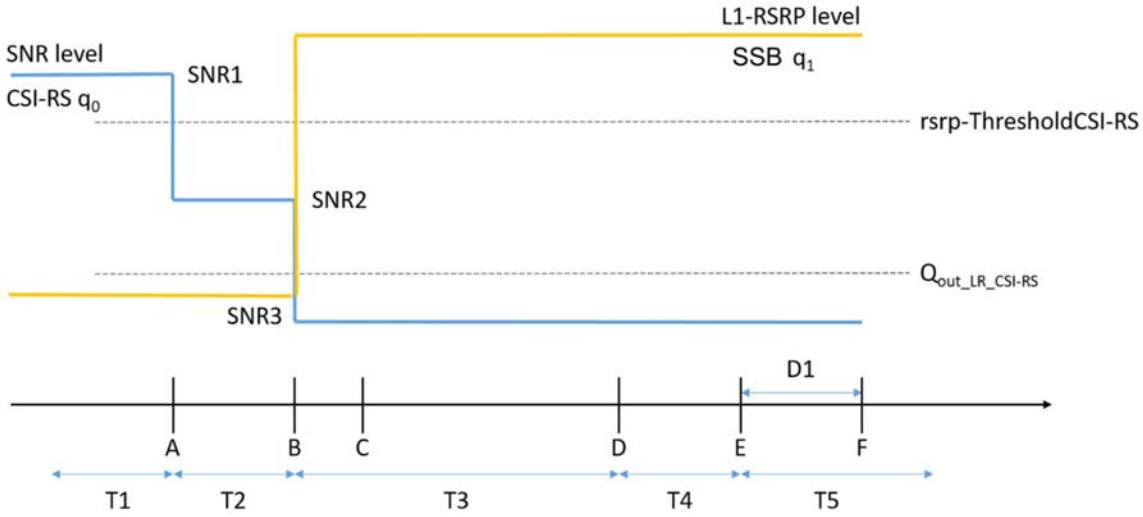

Figure A.14.4.2.6.1-1: SNR and L1-RSRP variation for beam failure detection and link recovery testing for SCell in DRX mode

A.14.4.2.6.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the shall detect beam failure and initiat link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 120+10 ms after the start of T5, the UE shall transmit preamble for UL-SCH resource application, followed by MAC-CE on the assigned uplink resources containing a beam associated with the candidate beam set q_1. The UE shall not transmit preamble earlier than time point B.

During T5, the System Simulator shall transmit a Random Access Response to UE after the System Simulator receives the preamble from UE. The UE shall transmit the msg.3 containing candidate beam set q1 for SCell BFR if UE receives the Random Access Response.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.14.4.3 Active BWP switch for satellite access

A.14.4.3.1 DCI-based and Timer-based Active BWP Switch

A.14.4.3.1.1 NR FR1 DL active BWP switch with non-DRX in SA

A.14.4.3.1.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement defined in clause 8.6C.

The supported test configurations are shown in Table A.14.4.3.1.1.1-1. The test scenario comprises of one cell (Cell 1) as given in Table A.14.4.3.1.1.1-2. Cell-specific parameters of the cell are specified in Table A.14.4.3.1.1.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on Cell 1 to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 on radio channel 1.
- UE is configured with 2 different UE-specific downlink bandwidth parts, BWP-1 and BWP-2 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1.
- UE is configured with a *bwp-InactivityTimer* timer value for Cell1.

The cell has constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

> Time period T1 starts when a DCI format 1_1 command for DL BWP switch, sent from the test equipment to the UE, is received at the UE side in Cell1's slot # denoted *i*. The UE shall switch its bandwidth part from BWP-1 to BWP-2.
>
> The UE shall be able to receive PDSCH on the first DL slot that occurs after the beginning of Cell1's DL slot ($i+T_{BWPswitchDelay}$) as defined in clause 8.6C and starts to report valid ACK/NACK for the Cell1 no later than the first UL slot that occurs after the beginning of slot ($i + T_{BWPswitchDelay} + k1 + 2^{\mu-\mu K_{offset}} K_{offset}$). The UE shall be continuously scheduled on Cell1's BWP-2 starting from the first DL slot that occurs after the beginning of slot ($i+T_{BWPswitchDelay}$).

During T2, the test equipment won't transmit DCI format for PDSCH reception on Cell1.

During T3,

The time period T3 starts from the slot #*j*, where j is the first slot of the subframe immediately after *bwp-InactivityTimer* timer expires. The UE shall switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1.

The UE shall be able to receive PDSCH on the first DL slot that occurs after the beginning of Cell1's slot ($j+T_{BWPswitchDelay}$) as defined in clause 8.6C and starts to report valid ACK/NACK for the Cell1 at latest on the first UL slot that occurs after the beginning of slot ($j + T_{BWPswitchDelay} + k1 + 2^{\mu-\mu K_{offset}} K_{offset}$). The UE shall be continuously scheduled on Cell1's BWP-1 starting from the first DL slot that occurs after the beginning of slot ($j+T_{BWPswitchDelay}$).

The test equipment verifies the DL BWP switch time by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK/NACK is received.

Table A.14.4.3.1.1.1-1: DL BWP switch supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode

Table A.14.4.3.1.1.1-2: General test parameters for DL BWP switch in SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active Cell		Cell 1	Cell1 on RF channel number 1.
CP length		Normal	
DRX		OFF	
bwp-InactivityTimer	ms	200	
T1	s	0.2	
T2	s	0.2	
T3	s	0.2	

Table A.14.4.3.1.1.1-3 : NR Cell specific test parameters for DL BWP switch in SA

Parameter		Unit	Cell 1
Frequency Range			FR1
Duplex mode	Config 1		FDD
$BW_{channel}$	Config 1		10 MHz: $N_{RB,c}$ = 52
Serving Satellite Configuration	Config 1		*[SSC.1] or [SSC.2] [Note: SSC.1 and SSC.2 are Serving Satellite Configurations for GSO and NGSO, respectively. The selection between the two is up to UE capability, and SSC.2 is selected if DUT supports both]*
Active BWP ID			1, 2
Initial DL BWP Configuration	Config 1		DLBWP.0.2 Note 4
Active DL BWP-1 Configuration	Config 1		DLBWP.1.1 Note 4
Active DL BWP-2 Configuration	Config 1		DLBWP.1.3 Note 4
Initial UL BWP Configuration	Config 1		ULBWP.0.2 Note 4
Active UL BWP-1 Configuration	Config 1		ULBWP.1.1 Note 4
Active UL BWP-2 Configuration	Config 1		N/A

PDSCH Reference measurement channel	Config 1		SR.1.1 FDD
RMSI CORESET parameters	Config 1		CR.1.1 FDD
Dedicated CORESET parameters	Config 1		CCR.1.2 FDD
OCNG Patterns			OP.1
SSB Configuration	Config 1		SSB.1 FR1
SMTC Configuration			SMTC.1
Correlation Matrix and Antenna Configuration			1x2 Low
TRS Configuration	Config 1		TRS.1.1 FDD
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note 2	Config 1	dBm/SCS	-104
N_{oc} Note 2		dBm/15kHz	-104
SS-RSRP Note 3	Config 1	dBm/SCS	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	Config 1	dBm/ 9.36MHz	-58.96
Propagation Condition			AWGN

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.14.4.3.1.1.2 Test Requirements

During T1, the UE shall start to send the ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot ($i + T_{BWPswitchDelay} + k1 + 2^{\mu - \mu K_{offset}} K_{offset}$).

During T3, the UE shall start to send the ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot ($j + T_{BWPswitchDelay} + k1 + 2^{\mu - \mu K_{offset}} K_{offset}$.

Where, *k1* is the timing between DL data receiving and acknowledgement as specified in [7].

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 8.6C.2-1.

All of the above test requirements shall be fulfilled in order for the observed Cell1 active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

A.14.4.3.2 RRC-based Active BWP Switch

A.14.4.3.2.1 NR FR1 DL active BWP switch of Cell with non-DRX in SA

A.14.4.3.2.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement for RRC-based BWP switch defined in clause 8.6C.

The supported test configurations are shown in Table A.14.4.3.2.1.1-1. The test scenario comprises of one Cell (Cell 1) as given in Table A.14.4.3.2.1.1-2. Cell-specific parameters of Cell are specified in Table A.14.4.3.2.1.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on Cell 1 to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 on radio channel 1.
- UE has bandwidth part BWP-1 in its RRC-configuration for Cell 1.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 of initial condition in Cell 1.

All cells have constant signal levels throughout the test.

The test consists of 1 time period, with duration of T1.

During T1,

Time period T1 starts when a *RRCReconfiguration* with updated bandwidth part configuration, sent from the test equipment to the UE, is completely received at the UE side in PCell's slot # denoted *i*. The UE shall reconfigure its bandwidth part with the updated bandwidth part BWP-1 of final condition.

The UE shall be able to receive PDSCH on PCell from the first DL slot that occurs after the beginning of DL slot (i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$) as defined in clause 8.6C.3 and starts to report valid ACK/NACK for the PCell from the first UL slot that occurs after the beginning of DL slot ($i + \frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}} + k1 + 2^{\mu-\mu_{K_{offset}}}K_{offset}$) on BWP-1 of final condition. The UE shall be continuously scheduled on PCell's BWP-1 of final condition starting from the first DL slot right after slot (i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$).

$T_{\text{RRCprocessingDelay}}$ and $T_{\text{BWPswitchDelayRRC}}$ are defined in clause 8.6C.3.

The test equipment verifies the DL BWP switch time in Cell by counting the time from the time when the RRC Reconfiguration message including updated BWP configuration is sent till the time when a vaild ACK/NACK is received is received.

Table A.14.4.3.2.1.1-1: DL BWP switch supported test configurations in SA scenario

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode

Table A.14.4.3.2.1.1-2: General test parameters for DL BWP switch in SA scenario

Parameter	Unit	Value	Comment

NR RF Channel Number		1	One NR radio channel is used for this test
Active Cell		Cell 1	Cell on RF channel number 1.
CP length		Normal	
DRX		OFF	
T1	s	0.2	

Table A.14.4.3.2.1.1-3: NR Cell specific test parameters for DL BWP switch in SA scenario

Parameter			Unit	Cell 1
Frequency Range				FR1
Duplex mode		Config 1		FDD
$BW_{channel}$		Config 1		10 MHz: $N_{RB,c}$ = 52
Serving Satellite Configuration		Config 1		*[SSC.1] or [SSC.2] [Note: SSC.1 and SSC.2 are Serving Satellite Configurations for GSO and NGSO, respectively. The selection between the two is up to UE capability, and SSC.2 is selected if DUT supports both]*
Active BWP ID				1
Initial DL BWP Configuration		Config 1		DLBWP.0.2
Initial UL BWP Configuration		Config 1		ULBWP.0.2
Initial Condition	Active DL BWP-1 Configuration	Config 1		DLBWP.1.3
	Active UL BWP-1 Configuration	Config 1		ULBWP.1.3
Final Condition	Active DL BWP-1 Configuration	Config 1		DLBWP.1.1
	Active UL BWP-1 Configuration	Config 1		ULBWP.1.1
PDSCH Reference measurement channel		Config 1		SR.1.1 FDD
RMSI CORESET parameters		Config 1		CR.1.1 FDD
Dedicated CORESET parameters		Config 1		CCR.1.2 FDD
OCNG Patterns				OP.1
SSB Configuration		Config 1		SSB.1 FR1
SMTC Configuration				SMTC.1
TRS Configuration		Config 1		TRS.1.1 FDD
Antenna Configuration				1x2 Low
Propagation Condition				AWGN
EPRE ratio of PSS to SSS			dB	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				

EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS(Note 1)			
N_{oc}Note 2	Config 1	dBm/SCS	-104
SS-RSRP Note 3	Config 1	dBm/SCS	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	Config 1	dBm/ 9.36MHz	-58.96
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			

A.14.4.3.2.1.2 Test Requirements

During T1, the UE shall be ready for the reception of uplink grant for the Cell from the first DL slot that occurs right after the begining of slot (i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$) and starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot ($i + \frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}} + k1 + 2^{\mu-\mu_{K_{offset}}} K_{offset}$).

Where, *k1* is the timing between DL data receiving and acknowledgement as specified in [7].

All of the above test requirements shall be fulfilled in order for the observed Cell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

A.14.4.4 UE specific CBW change for satellite access

A.14.4.4.1 UE specific CBW change on PCell in FR1 in non-DRX

A.14.4.4.1.1 Test Purpose and Environment

The purpose of this test is to verify the UE specific CBW change delay requirement defined in clause 8.13C.

The supported test configurations are shown in Table A.14.4.4.1.1-1. The test scenario comprises of one Cell (Cell 1), which is PCell as given in Table A.14.4.4.1.1-2. Cell-specific parameters are specified in Table A.14.4.4.1.1-3.

PDCCHs indicating new transmissions shall be sent continuously on Cell 1 to ensure that the UE sends ACK/NACK during the test.

Before the test starts:

UE is connected to Cell 1 (PCell) on radio channel 1.

UE has bandwidth part BWP-1 in its RRC-configuration for Cell 1 (PCell).

UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 of initial condition in PCell.

UE has been configured with UE specific CBW (CBW-1).

UE is indicated in *SCS-SpecificCarrier* [2] that the UE specific CBW is CBW-1 as the initial condition in Cell 1 (PCell).

Cell1 (PCell) has constant signal levels throughout the test.

The test consists of 1 time period, with duration of T1.

During T1,

Time period T1 starts when a *RRCReconfiguration* containing *SCS-SpecificCarrier* with updated UE specific CBW, sent from the test equipment to the UE, is completely received at the UE side in PCell's slot # denoted *i*. The UE shall reconfigure its UE specific CBW with the updated CBW-2 for the final condition.

The UE shall be able to receive PDSCH on PCell from the first DL slot that occurs after the beginning of DL slot ($i + \frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$) as defined in clause 8.13C and starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot ($i + \frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length} + k1 + 2^{\mu - \mu_{K_{offset}}} K_{offset}$) on the PCell's BWP-1 on CBW-2 for the final condition. The UE shall be continuously scheduled on the PCell's BWP-1 on CBW-2 for the final condition starting from the first DL slot right after slot ($i + \frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$).

$T_{RRCprocessingDelay}$ and $T_{CBWchangeDelayRRC}$ are defined in clause 8.13C.

The test equipment verifies the UE specific CBW switching delay in PCell by estimating the time from the moment the RRC Reconfiguration message including updated UE specific CBW configuration is sent until the moment a vaild ACK/NACK is received.

Table A.14.4.4.1.1-1: Supported test configurations for UE specific CBW change in SA scenario

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode

Table A.14.4.4.1.1-2: General test parameters for UE specific CBW change in SA scenario

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active Cell		Cell 1	Cell on RF channel number 1.
CP length		Normal	
DRX		OFF	
T1	s	0.2	

Table A.14.4.4.1.1-3: NR Cell specific test parameters for UE specific CBW change in SA scenario

Parameter		Unit	Cell 1
Frequency Range			FR1
Duplex mode	Config 1		FDD
$BW_{channel}$	Config 1		10 MHz: $N_{RB,c}$ = 52
Serving Satellite Configuration	Config 1		*[SSC.1] or [SSC.2]* *[Note: SSC.1 and SSC.2 are Serving Satellite Configurations for GSO and NGSO, respectively. The selection between the two is up to UE capability, and SSC.2 is selected if DUT supports both]*
Active DL BWP ID	Config 1		1
Initial DL BWP Configuration (BWP-1)	Config 1		DLBWP.0.2

Initial UL BWP Configuration		Config 1		ULBWP.0.2
Initial Condition	Active DLCBW-1 Configuration	Config 1		DLCBW.1.1
	Active UL CBW-1 Configuration	Config 1		ULCBW.1.1
Final Condition	Active DLCBW-1 Configuration	Config 1		DLCBW.1.2
	Active UL CBW-1 Configuration	Config 1		ULCBW.1.2
PDSCH Reference measurement channel		Config 1		SR.1.1 FDD
RMSI CORESET parameters		Config 1		CR.1.1 FDD
Dedicated CORESET parameters		Config 1		CCR.1.1 FDD
OCNG Patterns				OP.1
SSB Configuration		Config 1		SSB.1 FR1
SMTC Configuration				SMTC.1
TRS Configuration		Config 1		TRS.1.1 FDD
Antenna Configuration				1x2 Low
Propagation Condition				AWGN
EPRE ratio of PSS to SSS			dB	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS(Note 1)				
N_{oc} Note 2		Config 1	dBm/SCS	-104
SS-RSRP Note 3		Config 1	dBm/SCS	-87
$\hat{E}_s/I_{ot}$			dB	17
$\hat{E}_s/N_{oc}$			dB	17
Io Note3		Config 1	dBm/ 9.36MHz	-58.96

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.14.4.4.1.2 Test Requirements

During T1, the UE shall be ready for the reception of uplink grant for the PCell from the first DL slot that occurs right after the begining of slot ($i + \frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$) and starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot ($i + \frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length} + k1 + 2^{\mu - \mu_{K_{offset}}} K_{offset}$).

Where, *k1* is the timing between DL data receiving and acknowledgement as specified in [7].

All of the above test requirements shall be fulfilled in order for the observed UE specific CBW change delay on the PCell to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

A.14.4.5 Pathloss reference signal switching delay

A.14.4.5.1 MAC-CE based pathloss reference signal switch delay

A.14.4.5.1.1 Test Purpose and Environment

The purpose of this test is to verify the MAC-CE based pathloss reference signal switch delay requirement defined in clause 8.14C.

The supported test configurations are shown in Table A.14.4.5.1.1-1. The test scenario comprises of one cell (Cell 1) as given in Table A.14.4.5.1.1-2. Cell-specific parameters of the cell are specified in Table A.14.4.5.1.1-3 below.

The test consists of 3 successive time periods, with duration of T1, T2 and T3, respectively.

Prior to the start of the time duration T1,

- UE is connected to Cell 1 on radio channel 1.
- UE shall be fully synchronized to SSB #0.

During T1,

- The UE shall track SSB #1 so that SSB #1 as a pathloss reference signal is known to the UE.

Time period T2 starts when the UE is configured of the power headroom reporting functionality by upper layers by the test equipment and the UE shall transmit a PHR during T2.

During T2,

- UE is configured with a *phr-ProhibitTimer* timer value for Cell 1.
- UE is configured with a *phr-Tx-PowerFactorChange* value for Cell 1.

During T3,

Time period T3 starts when a PDSCH carrying MAC-CE activation for pathloss reference signal switch, sent from the test equipment to the UE to swicth the pathloss reference signal from SSB 0 to SSB 1, is received at the UE side in Cell1's slot # denoted *i*. The UE shall switch its pathloss reference signal to the target one and send PHR.

The UE shall be able to apply the target pathloss reference signal of the serving cell on which pathloss reference signal switch occurs no later than the slot $i + T_{HARQ} + \left\lceil \frac{3\text{ms} + 5*T_{target_PL-RS} + 2\text{ms}}{NR\ slot\ length} \right\rceil$ as defined in clause 8.14. The UE shall be able to apply old pathloss reference signals until the slot $i + T_{HARQ} + 3\text{N}_{\text{slot}}^{\text{subframe},\mu}$ as defined in clause 8.14.

The test equipment verifies the pathloss RS switch time by counting the slots from the time when the pathloss RS switch command is transmitted till a PHR is received during T3.

Table A.14.4.5.1.1-1: MAC-CE based pathloss reference signal switch supported test configurations

Configuration	Description

1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.4.5.1.1-2: General test parameters for MAC-CE based pathloss reference signal switch

Parameter		Unit	Value	Comment
Active PCell			Cell 1	
RF Channel Number			1	
Duplex mode	Config 1, 2		FDD	
DL initial BWP configuration	Config 1, 2		DLBWP.0.1	
DL dedicated BWP configuration	Config 1, 2		DLBWP.1.1	
UL initial BWP configuration	Config 1, 2		ULBWP.0.1	
UL dedicated BWP configuration	Config 1, 2,		ULBWP.1.1	
CORESET Reference Channel	Config 1, 2		CR.1.1 FDD	
SSB Configuration	Config 1, 2		SSB.1 FR1	
SMTC Configuration	Config 1, 2		SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 kHz	
SSB index assigned as pathloss RS			0 in T1, 0 in T2, 1 in T3	
OCNG parameters			OP.1	
CP length			Normal	
Correlation Matrix and Antenna Configuration			1x2 Low	
DRX			OFF	
Gap pattern ID			gp0	
phr-ProhibitTimer		sub frame	0	
phr-Tx-PowerFactorChange		dB	5	
phr-PeriodicTimer		sub frame	infinity	
Filter coefficient			0	L3 filtering is not used
T1		s	[2]	
T2		s	[2]	
T3		s	0.2	

Table A.14.4.5.1.1-3: NR Cell specific test parameters for MAC-CE based pathloss reference signal switch

Parameter		Unit	Test 1		
			T1	T2	T3
EPRE ratio of PDCCH DMRS to SSS		dB	4		
EPRE ratio of PDCCH to PDCCH DMRS		dB	0		
EPRE ratio of PBCH DMRS to SSS		dB	0		
EPRE ratio of PBCH to PBCH DMRS		dB			
EPRE ratio of PSS to SSS		dB			
EPRE ratio of PDSCH DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
	$\hat{E}_s / I_{ot}$	dB	[7]		

SSB with index 0	N_{oc}	Config 1, 2, 3	dBm/ 15kHz	[-101]
	$\hat{E}_s/N_{oc}$		dB	[7]
	SS-RSRP Note 4	Config 1, 2	dBm/ SCS	[-94]
		Config 3		[-91]
SSB with index 1	$\hat{E}_s/I_{ot}$		dB	[-3]
	N_{oc}	Config 1, 2, 3	dBm/ 15kHz	[-101]
	$\hat{E}_s/N_{oc}$		dB	[-3]
	SS-RSRP Note 4	Config 1, 2	dBm/ SCS	[-104]
		Config 3		[-101]
Io Note 5	Config 1, 2		dBm	-65.3/9.36MHz
	Config 3			-59.2/38.16MHz
Propagation condition				AWGN

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 4: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.
Note 5: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.

A.14.4.5.1.2 Test Requirements

During T3, the UE shall start to send the PHR for PCell no later than the slot $i + T_{HARQ} + \left\lceil \frac{3\text{ms} + 5 * T_{target_PL-RS} + 2\text{ms}}{NR\ slot\ length} \right\rceil$.

During T3, the UE shall start to send the PHR for PCell no earlier than the slot $i + T_{HARQ} + 3\text{N}_{\text{slot}}^{\text{subframe},\mu}$.

Where, T_{HARQ} is the timing between pathloss reference MAC-CE activation command and acknowledgement as specified in [7], T_{target_PL-RS} is the periodicity of the target pathloss reference signal which is SSB in this test.

During T3, UE shall send L1-RSRP report with measurement results for both SSB0 and SSB1.

All of the above test requirements shall be fulfilled in order for the observed pathloss RS switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

Note: The UE shall be given proper uplink transmission grant during T2 and T3.

A.14.5 Measurement procedure

A.14.5.1 Intra-frequency Measurements

A.14.5.1.1 SA event triggered reporting tests without gap under non-DRX

A.14.5.1.1.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clauses 9.2C.5.1 and 9.2C.5.2.

A.14.5.1.1.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for PCell and neighbour cell are given in Table A.14.5.1.1.2-1 and A.14.5.1.1.2-2 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

During the test, the test system shall emulate and send the GNSS signal to the test UE. The test parameters for GNSS signals are defined in B.4.1. The UE shall be provided with the valid information about the SAN serving the each cell in the test before the test.

UE is configured with 2 non-overlapping SMTCs for the intra-frequency measurement. The SMTC periodicity is 40ms, and SMTC1 is associated with Cell 1 with offset 0, and SMTC2 is associated with Cell 2 with offset 20ms.

Table A.14.5.1.1.2-1: Supported test configurations

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.5.1.1.2-2: General test parameters for SA intra-frequency event triggered reporting without gap for FR1

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2	Cell 1	
Neighbour cell		1, 2	Cell 2	Cell to be identified.
RF Channel Number		1, 2	1: Cell 1 and Cell 2	
NTN reference configuration		1	TBD	For GSO
		2	TBD	For NGSO
SMTC1 configuration		1	TBD	Period: 40ms, offset: 0
SMTC2 configuration		2	TBD	Period: 40ms, offset: 20ms
A3-Offset	dB	1, 2	-4.5	
CP length		1, 2	Normal	
Hysteresis	dB	1, 2	0	
Time To Trigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX		1, 2		OFF
Time offset between serving and neighbour cells		1, 2	20 ms	Asynchronous cells. The timing of Cell 2 is 20ms later than the timing of Cell 1.

T1	s	1, 2	5	
T2	s	1, 2	5	

Table A.14.5.1.1.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting without gap for FR1

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
SSB configuration		1, 2	SSB.1 FR1		TBD	
PDSCH RMC configuration		1, 2	SR.1.1 FDD		N/A	
RMSI CORESET RMC configuration		1, 2	CR.1.1 FDD		N/A	
Dedicated CORESET RMC configuration		1, 2	CCR.1.1 FDD		N/A	
OCNG Patterns		1, 2	OP.1		OP.1	
TRS Configuration		1, 2	TRS.1.1 FDD		N/A	
IInitial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1, 2	-98			
N_{oc} Note 2	dBm/15 kHz	1, 2	-98			
$\hat{E}_s/I_{ot}$	dB	1, 2	4	-1.46	-Infinity	-1.46
$\hat{E}_s/N_{oc}$	dB	1, 2	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS kHz	1, 2	-94	-94	-Infinity	-94
Io	dBm/9.36 MHz	1, 2	-64.60	-62.25	--64.60	-62.25
Propagation Condition		1, 2	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.14.5.1.1.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 800 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.14.5.1.2 SA event triggered reporting tests without gap under DRX

A.14.5.1.2.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clauses 9.2C.5.1 and 9.2C.5.2.

A.14.5.1.2.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for PCell are given in Table A.14.5.1.2.2-1, A.14.5.1.2.2-2 and A.14.5.1.2.2-3 below. In the measurement controlinformation, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furhtermore UE is allocated with PUSCH resource at every DRX cycle.

During the test, the test system shall emulate and send the GNSS signal to the test UE. The test parameters for GNSS signals are defined in B.4.1. The UE shall be provided with the valid information about the SAN serving the each cell in the test before the test.

UE is configured with 1 SMTC for the intra-frequency measurement. Both Cell 1 and Cell 2 are associated with the configured SMTC.

Table A.14.5.1.2.2-1: Supported test configurations

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.5.1.2.2-2: General test parameters for SA intra-frequency event triggered reporting without gap for PCell in FR1 with DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
Active cell		1, 2	Cell 1		
Neighbour cell		1, 2	Cell 2		Cell to be identified.
NTN reference configuration		1	TBD		For GSO
		2	TBD		For NGSO
RF Channel Number		1, 2	1: Cell 1 and Cell 2		
SMTC configuration		1, 2	SMTC.2		
A3-Offset	dB	1, 2	-4.5		
CP length		1, 2	Normal		
Hysteresis	dB	1, 2	0		
Time To Trigger	s	1, 2	0		
Filter coefficient		1, 2	0		L3 filtering is not used

DRX		1, 2	DRX.1	DRX. 7	
Time offset between serving and neighbour cells		1, 2	3 μs		Synchronous cells
T1	s	1, 2	5		
T2	s	1, 2	5	10	

Table A.14.5.1.2.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting without gap for PCell in FR1 with DRX

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
SSB configuration		1, 2	SSB.1 FR1		SSB.1 FR1	
PDSCH RMC configuration		1, 2	SR.1.1 FDD		N/A	
RMSI CORESET RMC configuration		1, 2	CR.1.1 FDD		N/A	
Dedicated CORESET RMC configuration		1, 2	CCR.1.1 FDD		N/A	
OCNG Patterns		1, 2	OP.1		OP.1	
TRS configuration		1, 2	TRS.1.1 FDD		N/A	
IInitial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1, 2	-98			
N_{oc} Note 2	dBm/15 kHz	1, 2	-98			
$\hat{E}_s/I_{ot}$	dB	1, 2	4	-1.46	-Infinity	-1.46
$\hat{E}_s/N_{oc}$	dB	1, 2	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS kHz	1, 2	-94	-94	-Infinity	-94
Io	dBm/9.36 MHz	1, 2	-64.60	-62.25	--64.60	-62.25
Propagation Condition		1, 2	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.14.5.1.2.3 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than TBD ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than TBD ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.14.5.1.3 SA event triggered reporting tests without gap under non-DRX with SSB index reading

A.14.5.1.3.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the FDD intra-frequency cell search requirements in clause 9.2C.5.1 and 9.2C.5.2.

A.14.5.1.3.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for FDD PCell and neighbour cell are given in Table A.14.5.1.3.2-1 and A.14.5.1.3.2-2 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

During the test, the test system shall emulate and send the GNSS signal to the test UE. The test parameters for GNSS signals are defined in B.4.1. The UE shall be provided with the valid information about the SAN serving the each cell in the test before the test.

UE is configured with 2 overlapping SMTC for the intra-frequency measurement. The SMTC periodicity is 40ms, and SMTC1 is associated with Cell 1 with offset 0, and SMTC2 is associated with Cell 2 with offset 3ms.

Table A.14.5.1.3.2-1: Supported test configurations

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.5.1.3.2-2: General test parameters for SA intra-frequency event triggered reporting without gap for FDD PCell in FR1 with SSB index reading

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2	Cell 1	
Neighbour cell		1, 2	Cell 2	Cell to be identified.
NTN reference configuration		1	TBD	For GSO
		2	TBD	For NGSO
RF Channel Number		1, 2	1: Cell 1 and Cell 2	
SSB configuration		1, 2	SSB.1 FR1	
SMTC1 configuration		1, 2	TBD	
SMTC2 configuration		1, 2	TBD	
A3-Offset	dB	1, 2	-4.5	

CP length		1, 2	Normal	
Hysteresis	dB	1, 2	0	
Time To Trigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX	ms	1, 2		OFF
Time offset between serving and neighbour cells		1, 2	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
T1	s	1, 2	5	
T2	s	1, 2	5	

Table A.14.5.1.3.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting without gap for FDD PCell in FR1 with SSB index reading

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
SSB configuration		1, 2	SSB.1 FR1		TBD	
PDSCH RMC configuration		1, 2	SR.1.1 FDD		N/A	
RMSI CORESET RMC configuration		1, 2	CR.1.1 FDD		N/A	
Dedicated CORESET RMC configuration		1, 2	CCR.1.1 FDD		N/A	
OCNG Patterns		1, 2	OP.1		OP.1	
TRS configuration		1, 2	TRS.1.1 FDD		N/A	
IInitial BWP configuration		1, 2	DLBWP.0,1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1, 2	-98			
N_{oc} Note 2	dBm/15 kHz	1, 2	-98			
$\hat{E}_s/I_{ot}$	dB	1, 2	4	-1.46	-Infinity	-1.46
$\hat{E}_s/N_{oc}$	dB	1, 2	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS kHz	1, 2	-94	-94	-Infinity	-94
Io	dBm/9.36 MHz	1, 2	-64.60	-62.25	--64.60	-62.25
Propagation Condition		1, 2	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.14.5.1.3.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than TBD ms from the beginning of time period T2. The UE is required to read the neighbour cell SSB index and report the acquired SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.14.5.1.4 SA event triggered reporting tests with single measurement gap under non-DRX for satellite access

A.14.5.1.4.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clause 9.2C.6.1 and 9.2C.6.2.

A.14.5.1.4.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters are given in Table A.14.5.1.4.2-1 and A.14.5.1.4.2-2 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

During the test, the test system shall emulate and send the GNSS signal to the test UE. The test parameters for GNSS signals are defined in B.4.1. The UE shall be provided with the valid information about the SAN serving each cell before the test.

UE is configured with 1 SMTC for the intra-frequency measurement. Both Cell 1 and Cell 2 are associated with the configured SMTC.

Table A.14.5.1.4.2-1: Supported test configurations

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.14.5.1.4.2-2: General test parameters for SA intra-frequency event triggered reporting with single measurement gap for PCell in FR1

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2	Cell 1	
Neighbour cell		1, 2	Cell 2	Cell to be identified.
RF Channel Number		1, 2	1: Cell 1 and Cell 2	

NTN reference configuration		1	TBD	For GSO
		2	TBD	For NGSO
Measurement gap type		1, 2	Per-UE gaps	
Gap Pattern ID		1, 2	0	As specified in clause 9.1.2-1.
Measurement gap repetition periodicity	ms	1, 2	40	
Measurement gap length	ms	1, 2	6	
Measurement gap offset	ms	1, 2	39	
A3-Offset	dB	1, 2	-4.5	
CP length		1, 2	Normal	
Hysteresis	dB	1, 2	0	
Time To Trigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX	ms	1, 2		OFF
Time offset between serving and neighbour cells		1,2	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
T1	s	1, 2	5	
T2	s	1, 2	5	

Table A.14.5.1.4.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting with single measurement gap for PCell in FR1

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
SSB configuration		1, 2	SSB.1 FR1		SSB.1 FR1	
SMTC configuration		1, 2	SMTC.2		SMTC.2	
CSI-RS parameters		1, 2	CSI-RS.1.2 FDD resource #0		N/A	
PDSCH RMC configuration		1, 2	SR.1.1 FDD		N/A	
RMSI CORESET RMC configuration		1, 2	CR.1.1 FDD		N/A	
Dedicated CORESET RMC configuration		1, 2	CCR.1.2 FDD		N/A	
OCNG Patterns		1, 2	OP.1		OP.1	
TRS configuration		1, 2	TRS.1.1 FDD		N/A	
Initial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2	DLBWP.1.2		DLBWP.1.1	
Active UL BWP configuration		1, 2	ULBWP.1.2		ULBWP.1.1	
RLM-RS		1, 2	CSI-RS		SSB	
N_{oc} Note 2	dBm/SCS	1, 2	-98			
N_{oc} Note 2	dBm/15 kHz	1, 2	-98			
$\hat{E}_s/I_{ot}$	dB	1, 2	4	-1.46	-Infinity	-1.46
$\hat{E}_s/N_{oc}$	dB	1, 2	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS kHz	1, 2	-94	-94	-Infinity	-94
Io	dBm/9.36 MHz	1, 2	-64.60	-62.25	-64.60	-62.25
Propagation Condition		1, 2	AWGN			

Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.14.5.1.4.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 800 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.14.5.1.5 SA event triggered reporting tests with FNO concurrent gaps under DRX for satellite access

A.14.5.1.5.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clause 9.2C.6.1 and 9.2C.6.2.

A.14.5.1.5.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters are given in Table A.14.5.1.5.2-1, A. 14.5.1.5.2-2 and A. 14.5.1.5.2-3 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2 and Cell 3.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furhtermore UE is allocated with PUSCH resource at every DRX cycle.

During the test, the test system shall emulate and send the GNSS signal to the test UE. The test parameters for GNSS signals are defined in B.4.1. The UE shall be provided with the valid information about the SAN serving each cell before the test.

The UE is configured with 2 FNO concurrent measurement gaps for the intra-frequency measurement. Serving Cell 1 is expected to be measured within MeasGapId #0 and Neighbour Cell 2 is expected to be measured within MeasGapId #1.

Table A.14.5.1.5.2-1: Supported test configurations

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.14.5.1.5.2-2: General test parameters for SA intra-frequency event triggered reporting with FNO concurrent gaps for PCell in FR1 with DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
Active cell		1, 2	Cell 1		
Neighbour cell		1, 2	Cell 2		Cell to be identified.
RF Channel Number		1, 2	1: Cell 1 and Cell 2		
NTN reference configuration		1	TBD		For GSO
		2	TBD		For NGSO
Measurement gap type		1, 2	Per-UE gap		
Gap Pattern ID		1	1		As specified in clause 9.1.2-1.
Measurement gap repetition periodicity	ms	1, 2	40		
Measurement gap length	ms	1, 2	6		
Measurement gap offset	ms	1, 2	19 for MeasGapId #0 4 for MeasGapId #1		
A3-Offset	dB	1, 2	-4.5		
CP length		1, 2	Normal		
Hysteresis	dB	1, 2	0		
Time To Trigger	s	1, 2	0		
Filter coefficient		1, 2	0		L3 filtering is not used
DRX		1, 2	DRX.1	DRX. 7	
Time offset between serving and neighbour cells		1, 2	3 ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
T1	s	1, 2	5		
T2	s	1, 2	5	10	

Table A.14.5.1.5.2 -3: NR Cell specific test parameters for SA intra-frequency event triggered reporting with FNO concurrent gaps for PCell in FR1 with DRX

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
SSB configuration		1, 2	SSB.1 FR1		SSB.7 FR1	
SMTC configuration		1, 2	SMTC.2		SMTC.Y	
CSI-RS parameters		1, 2	CSI-RS.1.2 FDD resource #0		N/A	
PDSCH RMC configuration		1, 2	SR.1.1 FDD		N/A	
RMSI CORESET RMC configuration		1, 2	CR.1.1 FDD		N/A	
Dedicated CORESET RMC configuration		1, 2	CCR.1.2 FDD		N/A	
OCNG Patterns		1, 2	OP.1		OP.1	

TRS configuration		1, 2	TRS.1.1 FDD		N/A	
Initial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2	DLBWP.1.2		DLBWP.1.1	
Active UL BWP configuration		1, 2	ULBWP.1.2		ULBWP.1.1	
RLM-RS		1, 2	CSI-RS		SSB	
N_{oc} Note 2	dBm/SCS	1, 2	-98			
N_{oc} Note 2	dBm/15 kHz	1, 2	-98			
$\hat{E}_s / I_{ot}$	dB	1, 2	4	-1.46	-Infinity	-1.46
$\hat{E}_s / N_{oc}$	dB	1, 2	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS kHz	1, 2	-94	-94	-Infinity	-94
Io	dBm/9.36 MHz	1, 2	-64.60	-62.25	-64.60	-62.25
Propagation Condition		1, 2	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.14.5.1.5.2-4: Void

Table A.14.5.1.5.2-5: Void

A.15.5.1.5.3 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 6400 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.14.5.1.6 SA event triggered reporting tests with PPO concurrent gaps under non-DRX with SSB index reading for satellite access

A.14.5.1.6.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the FDD intra-frequency cell search requirements in clause 9.2C.6.1 and 9.2C.6.2.

A.14.5.1.6.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for FDD PCell and neighbour cells are given in Table A.14.5.1.6.2-1 and A.14.5.1.6.2-2 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

During the test, the test system shall emulate and send the GNSS signal to the test UE. The test parameters for GNSS signals are defined in B.4.1. The UE shall be provided with the valid information about the SAN serving each cell before the test.

The UE is configured with 2 PPO concurrent measurement gaps for the intra-frequency measurement. Serving Cell 1 is expected to be measured within MeasGapId #0 and Neighbour Cell 2 is expected to be measured within MeasGapId #1. And the priority for MeasGapId #1 is higher than the priority for MeasGapId #0.

Table A.14.5.1.6.2-1: Supported test configurations

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.14.5.1.6.2-2: General test parameters for SA intra-frequency event triggered reporting with PPO concurrent gaps for FDD PCell in FR1 with SSB index reading

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2	Cell 1	
Neighbour cell		1, 2	Cell 2	Cell to be identified.
RF Channel Number		1, 2	1: Cell 1 and Cell 2	
NTN reference configuration		1	TBD	For GSO
		2	TBD	For NGSO
Measurement gap type		1, 2	Per-UE gap	
Gap Pattern ID		1, 2	0 for MeasGapId #0 1 for MeasGapId #1	As specified in clause 9.1.2-1.
Measurement gap repetition periodicity	ms	1, 2	40ms for MeasGapId #0 80ms for MeasGapId #1	
Measurement gap length	ms	1, 2	6	
Measurement gap offset	ms	1, 2	39 for MeasGapId #0 4 for MeasGapId #1	
A3-Offset	dB	1, 2	-4.5	
CP length		1, 2	Normal	

Hysteresis	dB	1, 2	0	
Time To Trigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX	ms	1, 2		OFF
Time offset between serving and neighbour cells		1, 2	5 ms	Asynchronous cells. The timing of Cell 2 is 5ms later than the timing of serving Cell 1.
T1	s	1, 2	5	
T2	s	1, 2	5	

Table A.14.5.1.6.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting with PPO concurrent gaps for FDD PCell in FR1 with SSB index reading

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
SSB configuration		1, 2	SSB.1 FR1		SSB.1 FR1	
SMTC configuration		1, 2	SMTC.2		SMTC.Y	
CSI-RS parameters		1, 2	CSI-RS.1.2 FDD resource #0		N/A	
PDSCH RMC configuration		1, 2	SR.1.1 FDD		N/A	
RMSI CORESET RMC configuration		1, 2	CR.1.1 FDD		N/A	
Dedicated CORESET RMC configuration		1, 2	CCR.1.2 FDD		N/A	
OCNG Patterns		1, 2	OP.1		OP.1	
TRS configuration		1, 2	TRS.1.1 FDD		N/A	
Initial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2	DLBWP.1.2		DLBWP.1.1	
Active UL BWP configuration		1, 2	ULBWP.1.2		ULBWP.1.1	
RLM-RS		1, 2	CSI-RS		SSB	
N_{oc} Note 2	dBm/SCS	1, 2	-98			
N_{oc} Note 2	dBm/15 kHz	1, 2	-98			
$\hat{E}_s / I_{ot}$	dB	1, 2	4	-1.46	-Infinity	-1.46
$\hat{E}_s / N_{oc}$	dB	1, 2	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS kHz	1, 2	-94	-94	-Infinity	-94
Io	dBm/9.36 MHz	1, 2	-64.60	-62.25	-64.60	-62.25
Propagation Condition		1, 2	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.14.5.1.6.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1240 ms from the beginning of time period T2. The UE is required to read the neighbour cell SSB index and report the acquired SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.14.5.2 Inter-frequency Measurements

A.14.5.2.1 SA event triggered reporting tests for FR1 without SSB time index detection when DRX is not used with single gap for satellite access

A.14.5.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3C.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.14.5.2.1.1-1, A.14.5.2.1.1-2 and A.14.5.2.1.1-3.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.14.5.2.1.1-2 is provided.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.14.5.2.1.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	GSO, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NGSO, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
Note 1: If UE supports both NGSO and GSO, the test case Config 1 can be skipped if the UE passes test case Config 2.	
Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.14.5.2.1.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
			Test 1	
NR RF Channel Number		Config 1,2	1, 2	Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.

Neighbour cell		Config 1,2	NR cell2	NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2	0	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2	9	
A3-Offset	dB	Config 1,2	-6	
Hysteresis	dB	Config 1,2	0	
CP length		Config 1,2	Normal	
TimeToTrigger	s	Config 1,2	0	
Filter coefficient		Config 1,2	0	L3 filtering is not used
DRX		Config 1,2	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1,2	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
T1	s	Config 1,2	5	
T2	s	Config 1,2	1	

Table A.14.5.2.1.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2	1		2	
Satellite information			Config 1	SSC.1		NSC.1	
			Config 2	SSC.2		NSC.2	
Duplex mode			Config 1,2	FDD			
$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c}$ = 52			
BWP BW		MHz	Config 1,2	10: $N_{RB,c}$ = 52			
BWP configuration	Initial DL BWP	Config 1	Config 1,2	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1,2	TRS.1.1 FDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,2	SR.1.1 FDD			
RMSI CORESET Reference Channel			Config 1,2	CR.1.1 FDD			
Dedicated CORESET Reference Channel			Config 1,2	CCR.1.1 FDD			
SSB parameters			Config 1,2	SSB.1 FR1		SSB.5 FR1	
SMTC configuration defined in A.3.11			Config 1,2	SMTC.2		SMTC.5	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	15			
EPRE ratio of PSS to SSS			Config 1,2	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							

EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15 kHz	Config 1,2	-98		-98	
N_{oc} Note2	dBm/SCS	Config 1,2	-98		-98	
SS-RSRP Note 3	dBm/SCS	Config 1,2	-94	-94	-Infinity	-91
$\hat{E}_s/I_{ot}$	dB	Config 1,2	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2	4	4	-Infinity	7
Io Note3	dBm/9.36MHz	Config 1,2	-64.59	-64.59	-70.05	-62.26
Propagation Condition		Config 1,2	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.14.5.2.1.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.14.5.2.2 SA event triggered reporting tests for FR1 without SSB time index detection when DRX is used with single gap for satellite access

A.14.5.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3C.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.14.5.2.2.1-1, A.14.5.2.2.1-2 and A.14.5.2.2.1-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table A.14.5.2.2.1-2 is provided.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.14.5.2.2.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	GSO, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NGSO, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
Note 1: If UE supports both NGSO and GSO, the test case Config 1 can be skipped if the UE passes test case Config 2. Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.14.5.2.2.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1,2	1, 2		Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2	NR cell2		NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2	0		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2	9		
A3-Offset	dB	Config 1,2	-6		
Hysteresis	dB	Config 1,2	0		
CP length		Config 1,2	Normal		
TimeToTrigger	s	Config 1,2	0		
Filter coefficient		Config 1,2	0		L3 filtering is not used
DRX		Config 1,2	DRX.1	DRX. 7	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1,2	3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
T1	s	Config 1,2	5		
T2	s	Config 1,2	[1.1]	[11]	

Table A.14.5.2.2.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number		Config 1,2	1		2	
Satellite information		Config 1	SSC.1		NSC.1	
		Config 2	SSC.2		NSC.2	

Duplex mode			Config 1,2	FDD			
$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c}$ = 52			
BWP BW		MHz	Config 1,2	10: $N_{RB,c}$ = 52			
BWP configuration	Initial DL BWP		Config 1,2	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1,2	TRS.1.1 FDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,2	SR.1.1 FDD			
RMSI CORESET Reference Channel			Config 1,2	CR.1.1 FDD			
Dedicated CORESET Reference Channel			Config 1,2	CCR.1.1 FDD			
SSB parameters			Config 1,2	SSB.1 FR1		SSB.5 FR1	
SMTC configuration defined in A.3.11			Config 1,2	SMTC.2		SMTC.5	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	15			
EPRE ratio of PSS to SSS			Config 1,2	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		dBm/15 kHz	Config 1,2	-98		-98	
N_{oc} Note2		dBm/SCS	Config 1,2	-98		-98	
SS-RSRP Note 3		dBm/SCS	Config 1,2	-94	-94	-Infinity	-91
$\hat{E}_s/I_{ot}$		dB	Config 1,2	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$		dB	Config 1,2	4	4	-Infinity	7
Io Note3		dBm/9.36MHz	Config 1,2	-64.59	-64.59	-70.05	-62.2
Propagation Condition			Config 1,2	AWGN		AWGN	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Table A.14.5.2.2.1-4: DRX-Configuration for SA inter-frequency event triggered reporting without SSB time index detection

Field	Test1	Test2	Comment
	Value	Value	
drx-onDurationTimer	ms1	ms1	As specified in clause 6.3.2 in TS 38.331 [2]
drx-InactivityTimer	ms1	ms1	
drx-RetransmissionTimerDL	sl1	sl1	
drx-RetransmissionTimerUL	sl1	sl1	
drx-LongCycleStartOffset	ms40	Ms640	
shortDRX	disable	disable	

Table A.14.5.2.2.1-5: *TimeAlignmentTimer* -Configuration SA inter-frequency event triggered reporting without SSB time index detection

Field	Value	Comment
TimeAlignmentTimer	ms500	As specified in clause 6.3.2 in TS 38.331 [2]

A.14.5.2.2.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than [1080] ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than [10240] ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2 UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.14.5.2.3 SA event triggered reporting tests for FR1 with SSB time index detection when DRX is not used with single gap for satellite access

A.14.5.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3C.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.14.5.2.3.1-1, A.14.5.2.3.1-2 and A.14.5.2.3.1-3.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.14.5.2.3.1-2 is provided.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.14.5.2.3.1-1: SA event triggered reporting tests with SSB index reading for FR1-FR1

Config	Description
1	GSO, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NGSO, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
Note 1: If UE supports both NGSO and GSO, the test case Config 1 can be skipped if the UE passes test case Config 2. Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.14.5.2.3.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 with SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
			Test 1	
Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2	1, 2	Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2	NR cell2	NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2	0	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2	9	
A3-Offset	dB	Config 1,2	-6	
Hysteresis	dB	Config 1,2	0	
CP length		Config 1,2	Normal	
TimeToTrigger	s	Config 1,2	0	
Filter coefficient		Config 1,2	0	L3 filtering is not used
DRX		Config 1,2	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1,2	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
T1	s	Config 1,2	5	
T2	s	Config 1,2	[1.1]	

Table A.14.5.2.3.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 with SSB time index detection

Parameter	Unit	Test configuration	Cell 1	Cell 2

				T1	T2	T1	T2
NR RF Channel Number			Config 1,2	1		2	
Duplex mode			Config 1,2	FDD			
$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c}$ = 52			
BWP BW		MHz	Config 1,2	10: $N_{RB,c}$ = 52			
BWP configuration	Initial DL BWP	Config 1	Config 1,2	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1,2	TRS.1.1 FDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,2	SR.1.1 FDD			
RMSI CORESET Reference Channel			Config 1,2	CR.1.1 FDD			
Dedicated CORESET Reference Channel			Config 1,2	CCR.1.1 FDD			
SSB parameters			Config 1,2	SSB.1 FR1		SSB.5 FR1	
SMTC configuration defined in A.3.11			Config 1,2	SMTC.2		SMTC.5	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	15			
EPRE ratio of PSS to SSS			Config 1,2	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		dBm/15 kHz	Config 1,2	-98		-98	
N_{oc} Note2		dBm/SCS	Config 1,2	-98		-98	
SS-RSRP Note 3		dBm/SCS	Config 1,2	-94	-94	-Infinity	-91
$\hat{E}_s/I_{ot}$		dB	Config 1,2	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$		dB	Config 1,2	4	4	-Infinity	7
Io Note3		dBm/9.36MHz	Config 1,2	-64.59	-64.59	-70.05	-62.2
Propagation Condition			Config 1,2	AWGN		AWGN	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.14.5.2.3.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than [1040] ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.14.5.2.4 SA event triggered reporting tests for FR1 without SSB time index detection when DRX is not used with two gaps in fully non-overlapped for satellite access

A.14.5.2.4.1 Test Purpose and Environment

The purpose of this test is to verify that the multiple gaps capable UE makes correct reporting of events. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3C.4.

In this test, there are three cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2, and NR cell 3 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.14.5.2.4.1-1, A.14.5.2.4.1-2 and A.14.5.2.4.1-3.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.14.5.2.4.1-2 is provided.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2 and NR cell 3.

Table A.14.5.2.4.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	GSO, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NGSO, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
Note 1:	If UE supports both NGSO and GSO, the test case Config 1 can be skipped if the UE passes test case Config 2.
Note 2:	target NR cell has the same SCS, BW and duplex mode as NR serving cell

Table A.14.5.2.4.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
			Test 1	
Parameter	**Unit**	**Test configuration**	**Value**	**Comment**
NR RF Channel Number		Config 1,2	1, 2	Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2	NR cell2 and NR cell 3	NR cell 2 and NR cell 3 are on NR RF channel number 2.
Gap Pattern Id		Config 1,2	0 for MeasGapId #0 0 for MeasGapId #1	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2	9 for MeasGapId #0 19 for MeasGapId #1	
A3-Offset	dB	Config 1,2	-6	
Hysteresis	dB	Config 1,2	0	
CP length		Config 1,2	Normal	
TimeToTrigger	s	Config 1,2	0	
Filter coefficient		Config 1,2	0	L3 filtering is not used
DRX		Config 1,2	OFF	DRX is not used
Time offset between serving and neighbour cell 2,3		Config 1,2	3ms	Asynchronous cells. The timing of Cell 2 and Cell 3 is 3ms later than the timing of Cell 1.
T1	s	Config 1,2	5	
T2	s	Config 1,2	[1]	

Table A.14.5.2.4.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2		Cell 3	
				T1	T2	T1	T2	T1	T2
NR RF Channel Number			Config 1,2	1		2		2	
Satellite information			Config 1	SSC.1		NSC.1			
			Config 2	SSC.2		NSC.2			
Duplex mode			Config 1,2	FDD					
$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c}$ = 52					
BWP BW		MHz	Config 1,2	10: $N_{RB,c}$ = 52					
BWP configuration	Initial DL BWP		Config 1,2	DLBWP.0.1		NA		NA	
	Initial UL BWP			ULBWP.0.1		NA		NA	
	Dedicated DL BWP			DLBWP.1.1		NA		NA	
	Dedicated UL BWP			ULBWP.1.1		NA		NA	
TRS configuration			Config 1,2	TRS.1.1 FDD		NA		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2	OP.1		OP.1		OP.1	

PDSCH Reference measurement channel		Config 1,2	SR.1.1 FDD					
RMSI CORESET Reference Channel		Config 1,2	CR.1.1 FDD					
Dedicated CORESET Reference Channel		Config 1,2	CCR.1.1 FDD					
SSB parameters		Config 1,2	SSB.1 FR1		SSB.5 FR1		SSB.1 FR1	
SMTC configuration defined in A.3.11		Config 1,2	SMTC.2		SMTC.Y		SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2	15					
EPRE ratio of PSS to SSS		Config 1,2	0		0		0	
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} Note2	dBm/15 kHz	Config 1,2	-98		-98		-98	
N_{oc} Note2	dBm/SCS	Config 1,2	-98		-98		-98	
SS-RSRP Note 3	dBm/SCS	Config 1,2	-94	-94	-Infinity	-91	-Infinity	-91
$\hat{E}_s/I_{ot}$	dB	Config 1,2	4	4	-Infinity	7	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2	4	4	-Infinity	7	-Infinity	7
Io Note3	dBm/9.36MHz	Config 1,2	-64.59	-64.59	-70.05	-62.26	-70.05	-62.26
Propagation Condition		Config 1,2	AWGN		AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.14.5.2.4.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than [920] ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.14.5.2.5 void

A.14.5.2.5.1 void

A.14.5.2.5.2 void

A.14.5.2.6 SA event triggered reporting tests for FR1 without SSB time index detection when DRX is not used with two gaps in partially partial overalpping for satellite access

A.14.5.2.6.1 Test Purpose and Environment

The purpose of this test is to verify that the multiple gaps capable UE makes correct reporting of events. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3C.4.

In this test, there are three cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2, and NR cell 3 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.14.5.2.6.1-1, A.14.5.2.6.1-2 and A.14.5.2.6.1-3.

In test 1 measurement gap pattern configuration # 0 and #1 as defined in Table A.14.5.2.6.1-2 are provided.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2 and NR cell 3.

Table A.14.5.2.6.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	GSO, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NGSO, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
Note 1: If UE supports both NGSO and GSO, the test case Config 1 can be skipped if the UE passes test case Config 2. Note 2: target NR cells have the same SCS, BW and duplex mode as NR serving cell	

Table A.14.5.2.6.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
			Test 1	
Parameter	**Unit**	**Test configuration**	**Value**	**Comment**
NR RF Channel Number		Config 1,2	1, 2	Two FR1 NR carrier frequencies is used.

Active cell		Config 1,2	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2	NR cell2 and NR cell 3	NR cell 2 and NR cell 3 are on NR RF channel number 2.
Gap Pattern Id		Config 1,2	0 for MeasGapId #0 1 for MeasGapId #1	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2	79 for MeasGapId #0 4 for MeasGapId #1	
A3-Offset	dB	Config 1,2	-6	
Hysteresis	dB	Config 1,2	0	
CP length		Config 1,2	Normal	
TimeToTrigger	s	Config 1,2	0	
Filter coefficient		Config 1,2	0	L3 filtering is not used
DRX		Config 1,2	OFF	DRX is not used
Time offset between serving and neighbour cell 1		Config 1,2	3μs	Synchronous.
Time offset between serving and neighbour cell 2		Config 1,2	5ms	Asynchronous. The timing of Cell 3 is 5ms later than the timing of Cell 1.
T1	s	Config 1,2	5	
T2	s	Config 1,2	1.5	

Table A.14.5.2.6.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2		Cell 3	
				T1	T2	T1	T2	T1	T2
NR RF Channel Number			Config 1,2	1		2		2	
Satellite information			Config 1	SSC.1		NSC.1			
			Config 2	SSC.2		NSC.2			
Duplex mode			Config 1,2	FDD					
$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c}$ = 52					
BWP BW		MHz	Config 1,2	10: $N_{RB,c}$ = 52					
BWP configuration	Initial DL BWP		Config 1,2	DLBWP.0.1		NA		NA	
	Initial UL BWP			ULBWP.0.1		NA		NA	
	Dedicated DL BWP			DLBWP.1.1		NA		NA	
	Dedicated UL BWP			ULBWP.1.1		NA		NA	
TRS configuration			Config 1,2	TRS.1.1 FDD		NA		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2	OP.1		OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,2	SR.1.1 FDD					
RMSI CORESET Reference Channel			Config 1,2	CR.1.1 FDD					
Dedicated CORESET Reference Channel			Config 1,2	CCR.1.1 FDD					
SSB parameters			Config 1,2	SSB.1 FR1		SSB.1 FR1		SSB.1 FR1	
SMTC configuration defined in A.3.11			Config 1,2	SMTC.2		SMTC.2		SMTC.Y	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	15					

EPRE ratio of PSS to SSS		Config 1,2	0		0		0	
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} Note2	dBm/15 kHz	Config 1,2	-98		-98		-98	
N_{oc} Note2	dBm/SCS	Config 1,2	-98		-98		-98	
SS-RSRP Note 3	dBm/SCS	Config 1,2	-94	-94	-Infinity	-91	-Infinity	-91
$\hat{E}_s/I_{ot}$	dB	Config 1,2	4	4	-Infinity	7	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2	4	4	-Infinity	7	-Infinity	7
Io Note3	dBm/9.36MHz	Config 1,2	-64.59	-64.59	-70.05	-62.26	-70.05	-62.26
Propagation Condition		Config 1,2	AWGN		AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.14.5.2.6.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than TBD ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2 UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.14.5.2.7 Event triggered reporting test without gap under non-DRX

A.14.5.2.7.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the inter-frequency cell search requirements in clauses 9.3C.7.

A.14.5.2.7.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) on NR RF channel 1 and a FR1 neighbour cell (Cell 2) on NR RF channel 2. The test parameters for PCell and neighbour cell are given in Table A.14.5.2.7.2-1, A.14.5.2.7.2-2 and A.14.5.2.7.2-3 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

During the test, the test system shall emulate and send the GNSS signal to the test UE. The test parameters for GNSS signals are defined in B.4.1. The UE shall be provided with the valid information about the SAN serving the each cell in the test before the test.

UE is configured with 2 non-overlapping SMTCs for the inter-frequency measurement. The SMTC periodicity is 40ms, and SMTC1 is associated with Cell 1 with offset 0, and SMTC2 is associated with Cell 2 with offset 20ms.

Table A.14.5.2.7.2-1: Supported test configurations

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.5.2.7.2-2: General test parameters for inter-frequency event triggered reporting without gap for FR1

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2	Cell 1	
Neighbour cell		1, 2	Cell 2	Cell to be identified.
RF Channel Number		1, 2	1: Cell 1 and Cell 2	
NTN reference configuration		1	TBD	For GSO
		2	TBD	For NGSO
SMTC1 configuration		1	TBD	Period: 40ms, offset: 0
SMTC2 configuration		2	TBD	Period: 40ms, offset: 20ms
A3-Offset	dB	1, 2	-4.5	
CP length		1, 2	Normal	
Hysteresis	dB	1, 2	0	
Time To Trigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX		1, 2		OFF
Time offset between serving and neighbour cells		1, 2	20 ms	Asynchronous cells. The timing of Cell 2 is 20ms later than the timing of Cell 1.
T1	s	1, 2	5	
T2	s	1, 2	5	

Table A.14.5.2.7.2-3: NR Cell specific test parameters for inter-frequency event triggered reporting without gap for FR1

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
SSB configuration		1, 2	SSB.1 FR1		SSB.1 FR1	
PDSCH RMC configuration		1, 2	SR.1.1 FDD		N/A	
RMSI CORESET RMC configuration		1, 2	CR.1.1 FDD		N/A	
Dedicated CORESET RMC configuration		1, 2	CCR.1.1 FDD		N/A	
OCNG Patterns		1, 2	OP.1		OP.1	
TRS Configuration		1, 2	TRS.1.1 FDD		N/A	
IInitial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1, 2	-98			
N_{oc} Note 2	dBm/15 kHz	1, 2	-98			
$\hat{E}_s / I_{ot}$	dB	1, 2	4	-1.46	-Infinity	-1.46
$\hat{E}_s / N_{oc}$	dB	1, 2	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS kHz	1, 2	-94	-94	-Infinity	-94
Io	dBm/9.36 MHz	1, 2	-64.60	-62.25	--64.60	-62.25
Propagation Condition		1, 2	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.14.5.2.7.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 800 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.14.5.2.8 Event triggered reporting tests without gap under DRX

A.14.5.2.8.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the inter-frequency cell search requirements in clauses 9.3C.7.

A.14.5.2.8.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) on NR RF channel 1 and a FR1 neighbour cell (Cell 2) on NR RF channel 2. The test parameters for PCell are given in Table A.14.5.2.8.2-1, A.14.5.2.8.2-2 and A.14.5.2.8.2-3 below. In the measurement controlinformation, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furhtermore UE is allocated with PUSCH resource at every DRX cycle.

During the test, the test system shall emulate and send the GNSS signal to the test UE. The test parameters for GNSS signals are defined in B.4.1. The UE shall be provided with the valid information about the SAN serving the each cell in the test before the test.

UE is configured with 1 SMTC for the inter-frequency measurement. Both Cell 1 and Cell 2 are associated with the configured SMTC.

Table A.14.5.2.8.2-1: Supported test configurations

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.5.2.8.2-2: General test parameters for inter-frequency event triggered reporting without gap for PCell in FR1 with DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
Active cell		1, 2	Cell 1		
Neighbour cell		1, 2	Cell 2		Cell to be identified.
NTN reference configuration		1	TBD		For GSO
		2	TBD		For NGSO
RF Channel Number		1, 2	1: Cell 1 and Cell 2		
SMTC configuration		1, 2	SMTC.2		
A3-Offset	dB	1, 2	-4.5		
CP length		1, 2	Normal		
Hysteresis	dB	1, 2	0		
Time To Trigger	s	1, 2	0		
Filter coefficient		1, 2	0		L3 filtering is not used
DRX		1, 2	DRX.1	DRX. 7	
Time offset between serving and neighbour cells		1, 2	3 μs		Synchronous cells
T1	s	1, 2	5		
T2	s	1, 2	5	10	

Table A.14.5.2.8.2-3: NR Cell specific test parameters for inter-frequency event triggered reporting without gap for PCell in FR1 with DRX

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
SSB configuration		1, 2	SSB.1 FR1		SSB.1 FR1	
PDSCH RMC configuration		1, 2	SR.1.1 FDD		N/A	
RMSI CORESET RMC configuration		1, 2	CR.1.1 FDD		N/A	
Dedicated CORESET RMC configuration		1, 2	CCR.1.1 FDD		N/A	
OCNG Patterns		1, 2	OP.1		OP.1	
TRS configuration		1, 2	TRS.1.1 FDD		N/A	
IInitial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1, 2	-98			
N_{oc} Note 2	dBm/15 kHz	1, 2	-98			
$\hat{E}_s / I_{ot}$	dB	1, 2	4	-1.46	-Infinity	-1.46
$\hat{E}_s / N_{oc}$	dB	1, 2	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS kHz	1, 2	-94	-94	-Infinity	-94
Io	dBm/9.36 MHz	1, 2	-64.60	-62.25	--64.60	-62.25
Propagation Condition		1, 2	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.14.5.2.8.3 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than TBD ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than TBD ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.14.5.3 L1-RSRP measurement for beam reporting for satellite access

A.14.5.3.1 SSB based L1-RSRP measurement for satellite access when DRX is not used

A.14.5.3.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.1, with the testing configurations for NR cells served by satellite access node (SAN) in Table A.14.5.3.1.1-1.

Table A.14.5.3.1.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test for satellite access

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.14.5.3.1.2 Test parameters

There is one cells in the test, the FR1 PCell (Cell 1) which is served by satellite access node (SAN). The test parameters for the Cell 1 are given in Table A.14.5.3.1.2-1 and Table A.14.5.3.1.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.14.5.3.1.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1		freq1
Duplex mode	1		FDD
TDD Configuration	1		N/A
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52
PDSCH Reference measurement channel	1		SR.1.1 FDD
RMSI CORESET Reference Channel	1		CR.1.1 FDD
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD

SSB configuration	1		SSB.3 FR1
OCNG Patterns	1		OP.1
Initial BWP Configuration	1		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1		SMTC.1
TRS Configuration	1		TRS.1.1 FDD
DRX configuration	1		Off
reportConfigType	1		periodic
reportQuantity	1		ssb-Index-RSRP
Number of reported RS	1		2
L1-RSRP reporting period	1	slot	80
T1	1	s	5
T2	1	s	1
EPRE ratio of PSS to SSS	1	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~3		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.14.5.3.1.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
N_{oc} Note2	1	dBm/15kHz	-94.65			
N_{oc} Note2	1	dBm/SSB SCS	-94.65			
$\hat{E}_s / I_{ot}$	1	dB	0	0	-Infinity	3
SSB RSRP Note3	1	dBm/SSB SCS	-94.65	-94.65	-Infinity	-91.65
Io Note3	1	dBm/9.36 MHz	-63.69	-63.69	-66.70	-61.93
$\hat{E}_s / N_{oc}$	1	dB	0	0	-Infinity	3

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.14.5.3.1.3 Test Requirements

The UE shall send L1-RSRP report every 80 slots. No later than 640ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute accuracy requirement in clause 10.1.19.1.1 and relative accuracy requirement in clause 10.1.19.1.2. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.14.5.3.2 SSB based L1-RSRP measurement for satellite access when DRX is used

A.14.5.3.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.1, with the testing configurations for NR cells served by satellite access node (SAN)in Table A.14.5.3.2.1-1.

Table A.14.5.3.2.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test for satellite access

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.14.5.3.2.2 Test parameters

There is one cells in the test, the FR1 PCell (Cell 1) which is served by satellite access node (SAN). The test parameters for the Cell 1 are given in Table A.14.5.3.2.2-1 and Table A.14.5.3.2.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.14.5.3.2.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1		freq1
Duplex mode	1		FDD
TDD Configuration	1		N/A
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52
PDSCH Reference measurement channel	1		SR.1.1 FDD

RMSI CORESET Reference Channel	1		CR.1.1 FDD
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD
SSB configuration	1		SSB.3 FR1
OCNG Patterns	1		OP.1
Initial BWP Configuration	1		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1		SMTC.1
TRS Configuration	1		TRS.1.1 FDD
DRX configuration	1		DRX.3
reportConfigType	1		periodic
reportQuantity	1		ssb-Index-RSRP
Number of reported RS	1		2
L1-RSRP reporting period	1	slot	80
T1	1	s	5
T2	1	s	1
EPRE ratio of PSS to SSS	1	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.14.5.3.2.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
N_{oc} Note2	1	dBm/15kHz	-94.65			
N_{oc} Note2	1	dBm/SSB SCS	-94.65			
$\hat{E}_s / I_{ot}$	1	dB	0	0	-Infinity	3
SSB RSRP Note3	1	dBm/SSB SCS	-94.65	-94.65	-Infinity	-91.65
Io Note3	1	dBm/9.36 MHz	-63.69	-63.69	-66.70	-61.93

$\hat{E}_s / N_{oc}$	1	dB	0	0	-Infinity	3

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.14.5.3.2.3 Test Requirements

The UE shall send L1-RSRP report every 80 slots. No later than 640ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute accuracy requirement in clause 10.1.19.1.1 and relative accuracy requirement in clause 10.1.19.1.2. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.14.5.3.3 CSI-RS based L1-RSRP measurement for satellite access when DRX is not used

A.14.5.3.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.2, with the testing configurations for NR cells served by satellite access node (SAN) in Table A.14.5.3.3.1-1.

Table A.14.5.3.3.1-1: Applicable NR configurations for FR1 CSI-RS based L1-RSRP test for satellite access

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.14.5.3.3.2 Test parameters

There is one cells in the test, the FR1 PCell (Cell 1) which is served by satellite access node (SAN). The test parameters for the Cell 1 are given in Table A.14.5.3.3.2-1 and Table A.14.5.3.3.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the CSI-RS and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-RSRP on aperiodic CSI-RS resources. UE is also configured to measure L1-RSRP based on SSB. After 80ms from the beginning of the test, the DCI trigger comes in slot n (0 for Config 1,2 and 8 for Config 3) of a frame and UE provides the report back based on the reporting configuration as defined in Table A.14.5.3.3.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs.

Table A.14.5.3.3.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~3		freq1
Duplex mode	1		FDD

TDD Configuration	1		N/A
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52
PDSCH Reference measurement channel	1		SR.1.1 FDD
RMSI CORESET Reference Channel	1		CR.1.1 FDD
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD
SSB configuration	1		SSB.3 FR1
CSI-RS configuration	1		CSI-RS 1.3 FDD
OCNG Patterns	1		OP.1
TRS Configuration	1		TRS.1.1 FDD
Initial BWP Configuration	1		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1		SMTC.1
DRX configuration	1		Off
reportConfigType	1		aperiodic
reportQuantity	1		cri-RSRP
Number of reported RS	1		2
qcl-Info	1		SSB#0 for resource#0
			SSB#1 for resource#1
reportSlotOffsetList	1	slots	8
T1	1	s	5
EPRE ratio of PSS to SSS	1	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.14.5.3.3.2-2: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
N_{oc} Note1	1	dBm/15kHz	-94.65	
N_{oc} Note1	1	dBm/SSB SCS	-94.65	
$\hat{E}_s / I_{ot}$	1	dB	0	3
CSI-RS RSRP Note2	1	dBm/SSB SCS	-94.65	-91.65
Io Note2	1	dBm/9.36 MHz	-63.69	-61.93
$\hat{E}_s / N_{oc}$	1	dB	0	3
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

A.14.5.3.3.3 Test Requirements

After 80ms from the beginning of the test, the UE shall send L1-RSRP report at slot 8 from the reception of DCI triggering the L1-RSRP measurement. The L1-RSRP report shall include the results for both CSI-RS#0 and CSI-RS#1 while meeting the absolute accuracy requirement in clause 10.1.20.1.1 and relative accuracy requirement in clause 10.1.20.1.2.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.14.5.3.4 CSI-RS based L1-RSRP measurement for satellite access when DRX is used

A.14.5.3.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.2, with the testing configurations for NR cells served by satellite access node (SAN) in Table A.14.5.3.4.1-1.

Table A.14.5.3.4.1-1: Applicable NR configurations for FR1 CSI-RS based L1-RSRP test for satellite access

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.14.5.3.4.2 Test parameters

There is one cells in the test, the FR1 PCell (Cell 1) which is served by satellite access node (SAN). The test parameters for the Cell 1 are given in Table A.14.5.3.4.2-1 and Table A.14.5.3.4.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the CSI-RS and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-

RSRP on aperiodic CSI-RS resources. UE is also configured to measure L1-RSRP based on SSB. After 80ms from the beginning of the test, the DCI trigger comes in slot n (0 for Config 1,2 and 8 for Config 3) of a frame and UE provides the report back based on the reporting configuration as defined in Table A.14.5.3.4.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs.

Table A.14.5.3.4.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1		freq1
Duplex mode	1		FDD
TDD Configuration	1		N/A
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52
PDSCH Reference measurement channel	1		SR.1.1 FDD
RMSI CORESET Reference Channel	1		CR.1.1 FDD
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD
SSB configuration	1		SSB.3 FR1
CSI-RS configuration	1		CSI-RS 1.3 FDD
OCNG Patterns	1		OP.1
TRS Configuration	1		TRS.1.1 FDD
Initial BWP Configuration	1		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1		SMTC.1
DRX configuration	1		DRX.3
reportConfigType	1		aperiodic
reportQuantity	1		cri-RSRP
Number of reported RS	1		2
qcl-Info	1		SSB#0 for resource#0
			SSB#1 for resource#1
reportSlotOffsetList	1	slots	8
T1	1	s	5
EPRE ratio of PSS to SSS	1	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			

EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~3		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.14.5.3.4.2-2: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
N_{oc} Note1	1	dBm/15kHz	-94.65	
N_{oc} Note1	1	dBm/SSB SCS	-94.65	
$\hat{E}_s / I_{ot}$	1	dB	0	3
CSI-RS RSRP Note2	1	dBm/SSB SCS	-94.65	-91.65
Io Note2	1	dBm/9.36 MHz	-63.69	-61.93
$\hat{E}_s / N_{oc}$	1	dB	0	3
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

A.14.5.3.4.3 Test Requirements

After 80ms from the beginning of the test, the UE shall send L1-RSRP report at slot 8 from the reception of DCI triggering the L1-RSRP measurement. The L1-RSRP report shall include the results for both CSI-RS#0 and CSI-RS#1 while meeting the absolute accuracy requirement in clause 10.1.20.1.1 and relative accuracy requirement in clause 10.1.20.1.2.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.14.6 Measurement Performance requirements

A.14.6.1 SS-RSRP for SAN

A.14.6.1.1 SA: intra-frequency case measurement accuracy with FR1 serving cell and FR1 target cell

A.14.6.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1.2C.1.1 and 10.1.2C.1.2 for intra-frequency measurements.

A.14.6.1.1.2 Test parameters

In this set of test cases all cells are on the same carrier frequency. Supported test configurations are shown in table A.14.6.1.1.2-1. Both absolute and relative accuracy of SS-RSRP intra-frequency measurements are tested by using the parameters in A.14.6.1.1.2-2. In all test cases, Cell 1 is the PCell, and Cell 2 is the target cell.

During the test, the test system shall emulate and send the GNSS signal to the test UE. The test parameters for GNSS signals are defined in B.4.1. The UE shall be provided with the valid information about the SAN serving the each cell in the test before the test.

The NTN reference configuration for Test configuration 1 is defined in TBD for GSO, NTN reference configuration for Test configuration 1 is defined in TBD for NGSO.

Table A.14.6.1.1.2-1: SS-RSRP Intra frequency SS-RSRP supported test configurations

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.6.1.1.2-2: SS-RSRP Intra frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
Cell ID			489	0	489	0	489	0
SSB ARFCN			freq1		freq1		freq1	
$BW_{channel}$	Config 1,2	MHz	10: $N_{RB,c}$ = 52					
BWP BW	Config 1,2		10: $N_{RB,c}$ = 52					
Downlink initial BWP configuration			DLBWP.0.1					
Downlink dedicated BWP configuration			DLBWP.1.1					
Uplink initial BWP configuration			ULBWP.0.1					
Uplink dedicated BWP configuration			ULBWP.1.1					
TRS configuration	Config 1,2		TRS.1.1 FDD	NA	TRS.1.1 FDD	NA	TRS.1.1 FDD	NA
DRX Cycle	Config 1,2	ms	Not Applicable					
PDSCH Reference measurement channel	Config 1,2		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
RMSI CORESET Reference Channel	Config 1,2		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	-
Control channel RMC	Config 1,2		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
SSB configuration	Config 1,2		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1

Time offset with Cell 1		Config 1,2	ms	-	3	-	3	-	3
SMTC configuration		Config 1,2		SMTC.2					
OCNG Patterns				OCNG pattern 1					
PDSCH/PDCCH subcarrier spacing		Config 1,2	kHz	15 kHz					
EPRE ratio of PSS to SSS			dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2	Config 1,2	NR_FDD_FR1_A	dBm/15Khz	-106		-88		-114	
N_{oc} Note2	Config 1,2		dBm/SCS	-106		-88		Same as Noc/15kHz	
$\hat{E}_s/I_{ot}$			dB	2.46	-5.97	2.46	-5.97	-0.01	-4.76
$\hat{E}_s/N_{oc}$			dB	6	1	6	1	3	0
SS-RSRP Note3	Config 1,2	NR_FDD_FR1_A	dBm/SCS	-100	-105	-82	-87	-111.00	-114.00
Io Note3	Config 1,2	NR_FDD_FR1_A	dBm/9.36MHz	-70.09		-52.09		-80.03	
Propagation condition			-	AWGN					
Antenna configuration				1x2					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.14.6.1.1.3 Test Requirements

The SS-RSRP measurement accuracy for cell 1 and cell 2 shall fulfil absolute requirement in clause 10.1.2C.1.1 and relative requirement in clause 10.1.2C.1.2.

A.14.6.1.2 SA inter-frequency case measurement accuracy with FR1 serving cell and FR1 target cell

A.14.6.1.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1.4C.1.1 and 10.1.4C.1.2 for inter-frequency measurements with the testing configurations for NR cells in Table A.14.6.1.2.1-1.

During the test, the test system shall emulate and send the GNSS signal to the test UE. The test parameters for GNSS signals are defined in B.4.1. The UE shall be provided with the valid information about the SAN serving the each cell in the test before the test.

The NTN reference configuration for Test configuration 1 is defined in TBD for GSO, NTN reference configuration for Test configuration 1 is defined in TBD for NGSO.

Table A.14.6.1.2.1-1: Applicable NR configurations for FR1 inter-frequency SS-RSRP accuracy test

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

A.14.6.1.2.2 Test parameters

In this set of test cases there are two cells in the test, PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on a different frequency than the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.14.6.1.2.2-1 below. Both absolute and relative accuracy of RSRP inter-frequency measurements are tested by using the parameters in Table A.14.6.1.2.2-1. The inter-frequency measurements are supported by a measurement gap.

Table A.14.6.1.2.2-1: SS-RSRP inter-frequency test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN	1, 2		freq1	freq2	freq1	freq2
$BW_{channel}$	1, 2	MHz	10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
PDSCH Reference measurement channel	1, 2		SR.1.1 FDD	-	SR.1.1 FDD	-
RMSI CORESET Reference Channel	1, 2		CR.1.1 FDD	-	CR.1.1 FDD	-
Dedicated CORESET Reference Channel	1, 2		CCR.1.1 FDD	-	CCR.1.1 FDD	-
SSB configuration	1, 2		SSB.1 FR1		SSB.1 FR1	
OCNG Patterns	1, 2		OP.1		OP.1	
TRS configuration	1, 2		TRS.1.1 FDD	-	TRS.1.1 FDD	
Initial BWP Configuration	1, 2		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration	1, 2		DLBWP.1.1 ULBWP.1.1		DLBWP.1.1 ULBWP.1.1	
Time offset with Cell 1	1, 2	ms	-	3	-	3
SMTC configuration	1, 2		SMTC.2		SMTC.2	
EPRE ratio of PSS to SSS	1, 2	dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS Note 1						
EPRE ratio of OCNG to OCNG DMRS Note 1						

N_{oc} Note2	NR_FDD_FR1_A	1,2	dBm/15 kHz	-94.65		(N_{oc} for Channel 2 +8dB)	-115
N_{oc} Note2	NR_FDD_FR1_A	1,2	dBm/SSB SCS	-94.65		(N_{oc} for Channel 2 +8dB)	-115
$\hat{E}_s / I_{ot}$		1,2	dB	10	10	13	-3
SS-RSRP Note3	NR_FDD_FR1_A	1,2	dBm/SCS	-84.65		(RSRP for Cell 2 +25dB)	-118.00
Io Note3	NR_FDD_FR1_A	1,2	dBm/ 9.36MHz	-56.28		(Io for Channel 2 +19.75dB)	-85.28
$\hat{E}_s / N_{oc}$		1,2	dB	10	10	13	-3
Propagation condition		1,2	-	AWGN		AWGN	
Antenna configuration		1,2		1x2		1x2	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.14.6.1.2.3 Test Requirements

The SS-RSRP measurement accuracy for Cell 1 and Cell 2 shall fulfil the absolute requirement in clause 10.1.4C.1.1 and relative requirement in clause 10.1.4C.1.2.

A.14.6.2 SS-RSRQ

A.14.6.2.1 SA: Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell for satellite access

A.14.6.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.7C.

A.14.6.2.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table A.14.6.2.1.2-1. The absolute accuracy of SS-RSRQ intra-frequency measurement is tested by using the parameters in Table A.14.6.2.1.2-2. In all test cases, Cell 1 is the PCell and Cell 2 is the target cell.

Table A.14.6.2.1.21: SS-RSRQ Intra frequency SS-RSRQ supported test configurations

Config	Description
1	GSO, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NGSO, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode

Note:	If UE supports both NGSO and GSO, the test case Config 1 can be skipped if the UE passes test case Config 2.

Table A.14.6.2.1.2-2: SS-RSRQ Intra frequency test parameters

Parameter			Unit	Test 1		Test 2		Test 3	
				Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN				freq1		freq1		freq1	
Duplex mode		Config 1,2		FDD					
$BW_{channel}$		Config 1,2	MHz	10: $N_{RB,c}$ = 52					
Gap Pattern ID				0					
BWP configuration		Initial DL BWP		DLBWP.0.1					
		Dedicated DL BWP		DLBWP.1.1					
		Initial UL BWP		ULBWP.0.1					
		Dedicated UL BWP		ULBWP.1.1					
DRX Cycle			ms	Not Applicable					
PDSCH Reference measurement channel		Config 1,2		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
RMSI CORESET Reference Channel		Config 1,2		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	
Control Channel RMC		Config 1,2		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
TRS Configuration		Config 1,2		TRS.1.1 FDD	-	TRS.1.1 FDD	-	TRS.1.1 FDD	-
OCNG Patterns				OP. 1					
SS-RSSI-Measurement				Not Applicable					
Time offset with Cell 1		Config 1,2	ms	-	3	-	3	-	3
SMTC configuration		Config 1,2		SMTC.2					
SSB configuration		Config 1,2		SSB.1 FR1					
CSI-RS for tracking		Config 1,2		TRS.1.1 FDD					
PDSCH/PDCCH subcarrier spacing		Config 1,2	kHz	15 kHz					
EPRE ratio of PSS to SSS			dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2	Config 1,2	NR_FDD_SAB_FR1_A	dBm/15kHz	-85		-101		-114	
N_{oc} Note2	Config 1,2	NR_FDD_SAB_FR1_A	dBm/SCS	-85		-101		-114	
$\hat{E}_s/I_{ot}$			dB	-1.76		-4.7		-5..46	-5.46
$\hat{E}_s/N_{oc}$			dB	3	3	-2.9	-2.9	-4	-4
SS-RSRP Note3	Config 1,2	NR_FDD_SAB_FR1_A	dBm/SCS	-82	-82	-103.9	-103.9	-118	-118
SS-RSRQ Note3		NR_FDD_SAB_FR1_A	dB	TBD	-14.84	-14.84	-16.76	-16.76	-17.34
Io Note3	Config 1,2	NR_FDD_SAB_FR1_A	dBm/9.36MHz	-50		-70		-83.5	
Propagation condition			-	AWGN	AWGN	AWGN	AWGN	AWGN	AWGN

Antenna configuration		1x2	1x2	1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
Note 3: SS-RSRQ, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							
Note 4: SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.							
Note 5: NR operating band groups are as defined in clause 3.5.2.							
Note 6: void							

A.14.6.2.1.3 Test Requirements

The SS-RSRQ measurement accuracy shall fulfil the requirements in clause 10.1.7C.1.1.

A.14.6.2.2 SA Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell for satellite access

A.14.6.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause TBD.

A.14.6.2.2.2 Test Parameters

In this test case the two cells (i.e., Cell 1 and Cell 2) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.14.6.2.2.2-1. Both absolute accuracy and relative accuracy requirements of SS-RSRQ inter-frequency measurement are tested by using test parameters in Table A.14.6.2.2.2-2. In all test cases, Cell 1 is the PCell and Cell 2 is target cell.

Table A.14.6.2.2.2-1: SS-RSRQ Inter frequency SS-RSRQ supported test configurations

Config	Description
1	GSO, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NGSO, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
Note: If UE supports both NGSO and GSO, the test case Config 1 can be skipped if the UE passes test case Config 2.	

Table A.14.6.2.2.2-2: SS-RSRQ Inter frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1	freq2	freq1	freq2	freq1	freq2
Duplex mode	Config 1,2		FDD					
$BW_{channel}$	Config 1,2	MHz	10: $N_{RB,c}$ = 52					
Gap pattern ID	Config 1,2		0					
BWP BW	Config 1,2		10: $N_{RB,c}$ = 52					
DRX Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1,2		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
RMSI CORESET Reference Channel	Config 1,2		CR.1.1 FDD	-	R.1.1 FDD	-	CR.1.1 FDD	
Dedicated CORESET Reference Channel	Config 1,2		CCR.1 .1 FDD	-	CCR.1. 1 FDD	-	CCR.1. 1 FDD	-
TRS Configuration	Config 1,2		TRS.1. 1 FDD	-	TRS.1.1 FDD	-	TRS.1. 1 FDD	-
OCNG Patterns			OCNG pattern 1					

Time offset with Cell 1	Config 1,2		ms	-	3	-	3	-	3
SMTC configuration	Config 1,2			SMTC pattern 2					
SSB configuration	Config 1,2			SSB pattern 1 in FR1					
CSI-RS for tracking	Config 1,2			TRS.1.1 FDD					
PDSCH/PDCCH subcarrier spacing	Config 1,2		kHz	15 kHz					
EPRE ratio of PSS to SSS			dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2	Config 1,2	NR_FDD_SAB_FR1_A	dBm/15kHz	-80.18		-106		-116	
N_{oc} Note2	Config 1,2	NR_FDD_SAB_FR1_A	dBm/15kHz	-80.18		-106		-116	
$\hat{E}_s / I_{ot}$			dB	-1.75		-1.75		3	-1.75
$\hat{E}_s / N_{oc}$			dB	-1.75		-1.75		3	-1.75
SS-RSRP Note3	Config 1,2	NR_FDD_SAB_FR1_A	dBm/SCS	-81.93	-81.93	-107.75	-107.75	-113	-117.75
SS-RSRQ Note3		NR_FDD_SAB_FR1_A	dB	-14.77	-14.77	-14.76	-14.76	-12.56	-14.76
Io Note3	Config 1,2	NR_FDD_SAB_FR1_A	dBm/9.36MHz	-50		-75.83		-83.28	-85.83
Propagation condition			-	AWGN	AWGN	AWGN	AWGN	AWGN	AWGN
Antenna configuration				1x2	1x2	1x2	1x2	1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRQ, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: NR operating band groups are as defined in clause 3.5.2.

A.14.6.2.2.3 Test Requirements

The SS-RSRQ measurement accuracy shall fulfil the requirements in clause 10.1.9C.1.1 and 10.1.9C.1.2.

A.14.6.3 SS-SINR

A.14.6.3.1 SA intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.14.6.3.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.12C.1.1.

A.14.6.3.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table A.14.6.3.1.2-1. The absolute accuracy of SS-SINR intra-frequency measurement is tested by using the parameters in Table A.14.6.3.1.2-2. In all test cases, Cell 1 is the PCell and Cell 2 is the target cell.

Table A.14.6.3.1.2-1: SS-SINR Intra frequency SS-SINR supported test configurations

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.6.3.1.2-2: SS-SINR Intra frequency test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1		freq1	
Duplex mode	Config 1		FDD			
Downlink initial BWP configuration			DLBWP.0.1			
Downlink dedicated BWP configuration			DLBWP.1.1			
Uplink initial BWP configuration			ULBWP.0.1			
Uplink dedicated BWP configuration			ULBWP.1.1			
DRX Cycle configuration		ms	Not Applicable			
TRS configuration	Config 1, 2		TRS.1.1 FDD		TRS.1.1 FDD	
PDSCH Reference measurement channel	Config 1, 2		SR.1.1 FDD	-	SR.1.1 FDD	-
RMSI CORESET Reference Channel	Config 1, 2		CR.1.1 FDD	-	CR.1.1 FDD	
Dedicated CORESET Reference Channel	Config 1, 2		CCR.1.1 FDD	-	CCR.1.1 FDD	-
OCNG Patterns			OP.1			
SS-RSSI-Measurement			Not Applicable			
SMTC configuration	Config 1, 2		SMTC.2			
Time offset with Cell 1	Config 1, 2	ms	-	3	-	3
SSB configuration	Config 1, 2		SSB.1 FR1			
PDSCH/PDCCH subcarrier spacing	Config 1, 2	kHz	15			
EPRE ratio of PSS to SSS		dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	NR_FDD_SAB_FR1_A,	dBm/15kHz	-93		-116	

		NR_FDD_SAB_FR1_B				-115.5	
		NR_FDD_SAB_FR1_C				-115	
		NR_FDD_SAB_FR1_D				-114.5	
		NR_FDD_SAB_FR1_E				-114	
		NR_FDD_SAB_FR1_F,				-113.5	
		NR_FDD_SAB_FR1_G				-113	
		NR_FDD_SAB_FR1_H				-112.5	
		NR_FDD_SAB_FR1_I				-112	
		NR_FDD_SAB_FR1_J				-111.5	
N_{oc} Note2	Config 1, 2		dBm/SCS	-93		Same as Noc for 15kHz	
$\hat{E}_s / I_{ot}$			dB	0	-3.19	-5.46	-5.46
$\hat{E}_s / N_{oc}$			dB	4.54	2.66	-4	-4
SS-RSRP Note3	Config 1, 2	NR_FDD_SAB_FR1_A,	dBm/SCS	-88.46	-90.34	-120	-120
		NR_FDD_SAB_FR1_B				-119.5	-119.5
		NR_FDD_SAB_FR1_C				-119	-119
		NR_FDD_SAB_FR1_D				-118.5	-118.5
		NR_FDD_SAB_FR1_E				-118	-118
		NR_FDD_SAB_FR1_F,				-117.5	-117.5
		NR_FDD_SAB_FR1_G				-117	-117
		NR_FDD_SAB_FR1_H				-116.5	-116.5
		NR_FDD_SAB_FR1_I				-116	-116
		NR_FDD_SAB_FR1_J				-115.5	-115.5
SS-SINR Note3		NR_FDD_SAB_FR1_A,	dB	0	-3.19	-5.46	-5.46
		NR_FDD_SAB_FR1_B					
		NR_FDD_SAB_FR1_C					
		NR_FDD_SAB_FR1_D					
		NR_FDD_SAB_FR1_E					
		NR_FDD_SAB_FR1_F,					
		NR_FDD_SAB_FR1_G					
		NR_FDD_SAB_FR1_H					

		NR_FDD_SAB_FR1_I			
		NR_FDD_SAB_FR1_J			
Io[Note3]	Config 1, 2	NR_FDD_SAB_FR1_A,	dBm/ 9.36MHz	-57.5	-85.51
		NR_FDD_SAB_FR1_B			-85.01
		NR_FDD_SAB_FR1_C			-84.51
		NR_FDD_SAB_FR1_D			-84.01
		NR_FDD_SAB_FR1_E			-83.51
		NR_FDD_SAB_FR1_F,			-83.01
		NR_FDD_SAB_FR1_G			-82.51
		NR_FDD_SAB_FR1_H			-82.01
		NR_FDD_SAB_FR1_I			-81.51
		NR_FDD_SAB_FR1_J			-81.01
Propagation condition			-	AWGN	
Antenna configuration			-	1x2	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: NR operating band groups are as defined in clause 3.5.2.

A.14.6.3.1.3 Test Requirements

The SS-SINR measurement accuracy shall fulfil the requirements in clause 10.1.12C.1.1.

A.14.6.3.2 SA Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.14.6.3.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1.14C.1.1 and 10.1.14C.1.2.

A.14.6.3.2.2 Test Parameters

In this test case the two cells (i.e., Cell 1 and Cell 2) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.14.6.3.2.2-1. Both absolute accuracy and relative accuracy requirements of SS-SINR inter-frequency measurement are tested by using test parameters in Table A.14.6.3.2.2-2. In all test cases, Cell 1 is the PCell and Cell 2 is target cell.

Table A.14.6.3.2.2-1: SS-SINR Inter frequency SS-SINR supported test configurations

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.6.3.2.2-2: SS-SINR Inter frequency test parameters

Parameter			Unit	Test 1		Test 2		Test 3	
				Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN				freq1	freq2	freq1	freq2	freq1	freq2
Duplex mode	Config 1			FDD					
Downlink initial BWP configuration				DLBWP.0.1					
Downlink dedicated BWP configuration				DLBWP.1.1					
Uplink initial BWP configuration				ULBWP.0.1					
Uplink dedicated BWP configuration				ULBWP.1.1					
DRX Cycle configuration			ms	Not Applicable					
Gap pattern ID				0	-	0	-	0	-
TRS configuration	Config 1, 2			TRS.1.1 FDD		TRS.1.1 FDD		TRS.1.1 FDD	
PDSCH Reference measurement channel	Config 1, 2			SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
RMSI CORESET Reference Channel	Config 1, 2			CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	
Dedicated CORESET Reference Channel	Config 1, 2			CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
OCNG Patterns				OP.1					
SS-RSSI-Measurement				Not Applicable					
Time offset with Cell 1	Config 1, 2		ms	-	3	-	3	-	3
SMTC configuration	Config 1, 2			SMTC pattern 2					
SSB configuration	Config 1, 2			SSB.1 FR1					
PDSCH/PDCCH subcarrier spacing	Config 1, 2		kHz	15					
EPRE ratio of PSS to SSS			dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2	Config 1, 2	NR_FDD_SAB_FR1_A,	dBm/15kHz	-88		-108.5		-119.5	
		NR_FDD_SAB_FR1_B						-119	
		NR_FDD_SAB_FR1_C						-118.5	
		NR_FDD_SAB_FR1_D						-118	
		NR_FDD_SAB_FR1_E						-117.5	
		NR_FDD_SAB_FR1_F,						-117	

		NR_FDD_SAB_FR1_G								-116.5
		NR_FDD_SAB_FR1_H								-116
		NR_FDD_SAB_FR1_I								-115.5
		NR_FDD_SAB_FR1_J								-115
N_{oc} Note2	Config 1, 2		dBm/SCS	-88		-108.5		Same as Noc for 15kHz		
$\hat{E}_s / I_{ot}$			dB	-1.75	-1.75	20	20	-4.0	-4.0	
$\hat{E}_s / N_{oc}$			dB	-1.75		20		-4.0		
SS-RSRP Note3	Config 1, 2	NR_FDD_SAB_FR1_A,	dBm/SCS	-89.75		-88.5		-123.5		
		NR_FDD_SAB_FR1_B						-123		
		NR_FDD_SAB_FR1_C						-122.5		
		NR_FDD_SAB_FR1_D						-122		
		NR_FDD_SAB_FR1_E						-121.5		
		NR_FDD_SAB_FR1_F,						-121		
		NR_FDD_SAB_FR1_G						-120.5		
		NR_FDD_SAB_FR1_H						-120		
		NR_FDD_SAB_FR1_I						-119.5		
		NR_FDD_SAB_FR1_J						-119		
SS-SINR Note3		NR_FDD_SAB_FR1_A,	dB	-1.75		20		-4.0		
		NR_FDD_SAB_FR1_B								
		NR_FDD_SAB_FR1_C								
		NR_FDD_SAB_FR1_D								
		NR_FDD_SAB_FR1_E								
		NR_FDD_SAB_FR1_F,								
		NR_FDD_SAB_FR1_G								
		NR_FDD_SAB_FR1_H								
		NR_FDD_SAB_FR1_I								

		NR_FDD_SAB_FR1_J				
Io[Note3]	Config 1, 2	NR_FDD_SAB_FR1_A,	dBm/ 9.36MHz	-57.83	-60.5	-90.09
		NR_FDD_SAB_FR1_B				-89.59
		NR_FDD_SAB_FR1_C				-89.09
		NR_FDD_SAB_FR1_D				-88.59
		NR_FDD_SAB_FR1_E				-88.09
		NR_FDD_SAB_FR1_F,				-87.59
		NR_FDD_SAB_FR1_G				-87.09
		NR_FDD_SAB_FR1_H				-86.59
		NR_FDD_SAB_FR1_I				-86.09
		NR_FDD_SAB_FR1_J				-85.59
Propagation condition			-	AWGN		
Antenna configuration			-	1x2		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: NR operating band groups are as defined in clause 3.5.2.

A.14.6.3.2.3 Test Requirements

The SS-SINR measurement accuracy shall fulfil the requirements in clause 10.1.14C.1.1 and 10.1.14C.1.2.

A.14.6.4 L1-RSRP measurement for beam reporting

A.14.6.4.1 SSB based L1-RSRP measurement

A.14.6.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clause 9.5C.4 and clause 10.1.19C.1 for L1-RSRP measurements based on SSB with the testing configurations for NR cells in Table A.14.6.4.1.1-1.

Table A.14.6.4.1.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

A.14.6.4.1.2 Test parameters

In this set of test cases there one cell in the test, PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.14.6.4.1.2-1 below. The absolute and relative accuracy of L1-RSRP measurements are tested by using the parameters in Table A.14.6.4.1.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured one SSB resource set with two SSB resources. UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSB resources 0 and 1.

Table A.14.6.4.1.2-1: FR1 SSB based L1-RSRP test parameters

Parameter		Config	Unit	Test 1	Test 2
SSB GSCN		1, 2		freq1	freq1
Duplex mode		1, 2		FDD	FDD
TDD Configuration		1, 2		N/A	N/A
$BW_{channel}$		1, 2	MHz	10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
PDSCH Reference measurement channel		1, 2		SR.1.1 FDD	SR.1.1 FDD
RMSI CORESET Reference Channel		1, 2		CR.1.1 FDD	CR.1.1 FDD
Dedicated CORESET Reference Channel		1, 2		CCR.1.1 FDD	CCR.1.1 FDD
SSB configuration		1, 2		SSB.3 FR1	SSB.3 FR1
OCNG Patterns		1, 2		OP.1	OP.1
Initial BWP Configuration		1, 2		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
TRS configuration		1, 2		TRS.1.1 FDD	TRS.1.1 FDD
Dedicated BWP configuration		1, 2		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
SMTC configuration		1, 2		SMTC.1	SMTC.1
reportConfigType		1, 2		periodic	periodic
reportQuantity		1, 2		ssb-Index-RSRP	ssb-Index-RSRP
Number of reported RS		1, 2		2	2
L1-RSRP reporting period		1, 2		slot80	slot80
EPRE ratio of PSS to SSS		1, 2	dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
N_{oc} Note2	NR_FDD_SAB_FR1_A	1, 2	dBm/15kHz	-94.65	-117
	NR_FDD_SAB_FR1_B				-116.5
	NR_FDD_SAB_FR1_C				-116
	NR_FDD_SAB_FR1_D NR_FDD_SAB_FR1_E				-115.5

	NR_FDD_SAB_FR1_F NR_FDD_SAB_FR1_G				-115
	NR_FDD_SAB_FR1_H				-114.5
	NR_FDD_SAB_FR1_I				-114
	NR_FDD_SAB_FR1_J				-113.5
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1, 2	dBm/SSB SCS	-94.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
$\hat{E}_s/I_{ot}$		1, 2	dB	10	-3
SSB RSRP Note3	NR_FDD_SAB_FR1_A	1, 2	dBm/SSB SCS	-84.65	-120
	NR_FDD_SAB_FR1_B				-119.5
	NR_FDD_SAB_FR1_C				-119
	NR_FDD_SAB_FR1_D NR_FDD_SAB_FR1_E				-118.5
	NR_FDD_SAB_FR1_F NR_FDD_SAB_FR1_G				-118
	NR_FDD_SAB_FR1_H				-117.5
	NR_FDD_SAB_FR1_I				-117
	NR_FDD_SAB_FR1_J				-116.5
Io Note3	NR_FDD_SAB_FR1_A	1, 2	dBm/9.36 MHz	-56.28	-87.28
	NR_FDD_SAB_FR1_B				-86.78
	NR_FDD_SAB_FR1_C				-86.28
	NR_FDD_SAB_FR1_D NR_FDD_SAB_FR1_E				-85.78
	NR_FDD_SAB_FR1_F NR_FDD_SAB_FR1_G				-85.28
	NR_FDD_SAB_FR1_H				-84.78
	NR_FDD_SAB_FR1_I				-84.28
	NR_FDD_SAB_FR1_J				-83.78
$\hat{E}_s/N_{oc}$		1, 2	dB	10	-3
Propagation condition		1, 2		AWGN	AWGN
Antenna configuration		1, 2		1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.14.6.4.1.3 Test Requirements

The L1-RSRP measurement accuracy for SSB#0 and SSB#1 of Cell 2 shall fulfil the requirements in clauses 10.1.19C.1.

A.14.6.4.2 CSI-RS based L1-RSRP measurement on resource set with repetition off

A.14.6.4.2.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clause 9.5C.4 and clause 10.1.19C.2 for L1-RSRP measurements based on CSI-RS with the testing configurations for NR cells in Table A.14.6.4.2.1-1.

Table A.14.6.4.2.1-1: Applicable NR configurations for FR1 CSI-RS based L1-RSRP test

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

A.14.6.4.2.2 Test parameters

In this set of test cases there are one cell in the test, PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.14.6.4.2.2-1 below. The absolute and relative accuracy of L1-RSRP measurements are tested by using the parameters in Table A.14.6.4.2.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured one CSI-RS resource set with two CSI-RS resources. UE is configured to perform RLM and BFD based on SSB 0 and 1. CSI-RS is not transmitted in the same OFDM symbols as SSB.

Table A.14.6.4.2.2-1: FR1 CSI-RS based L1-RSRP test parameters

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1, 2		freq1	freq1
Duplex mode	1, 2		FDD	FDD
TDD Configuration	1, 2		N/A	N/A
$BW_{channel}$	1, 2	MHz	10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
PDSCH Reference measurement channel	1, 2		SR.1.1 FDD	SR.1.1 FDD
RMSI CORESET Reference Channel	1, 2		CR.1.1 FDD	CR.1.1 FDD
Dedicated CORESET Reference Channel	1, 2		CCR.1.1 FDD	CCR.1.1 FDD
SSB configuration	1, 2		SSB.3 FR1	SSB.3 FR1
OCNG Patterns	1, 2		OP.1	OP.1
TRS configuration	1, 2		TRS.1.1 FDD	TRS.1.1 FDD
Initial BWP Configuration	1, 2		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1, 2		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
SMTC configuration	1, 2		SMTC.1	SMTC.1
CSI-RS	1, 2		CSI-RS 1.2 FDD	CSI-RS 1.2 FDD
reportConfigType	1, 2		periodic	periodic
reportQuantity	1, 2		cri-RSRP	cri-RSRP
Number of reported RS	1, 2		2	2

L1-RSRP reporting period		1, 2		slot80	slot80
EPRE ratio of PSS to SSS		1, 2	dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
N_{oc} Note2	NR_FDD_SAB_FR1_A	1, 2	dBm/15kHz	-94.65	-117
	NR_FDD_SAB_FR1_B				-116.5
	NR_FDD_SAB_FR1_C				-116
	NR_FDD_SAB_FR1_D NR_FDD_SAB_FR1_E				-115.5
	NR_FDD_SAB_FR1_F NR_FDD_SAB_FR1_G				-115
	NR_FDD_SAB_FR1_H				-114.5
	NR_FDD_SAB_FR1_I				-114
	NR_FDD_SAB_FR1_J				-113.5
N_{oc} Note2	NR_FDD_SAB_FR1_A	1, 2	dBm/CSI-RS SCS	-94.65	-117
	NR_FDD_SAB_FR1_B				-116.5
	NR_FDD_SAB_FR1_C				-116
	NR_FDD_SAB_FR1_D NR_FDD_SAB_FR1_E				-115.5
	NR_FDD_SAB_FR1_F NR_FDD_SAB_FR1_G				-115
	NR_FDD_SAB_FR1_H				-114.5
	NR_FDD_SAB_FR1_I				-114
	NR_FDD_SAB_FR1_J				-113.5
$\hat{E}_s/I_{ot}$		1, 2	dB	10	-3
CSI-RS RSRP Note3	NR_FDD_SAB_FR1_A	1, 2	dBm/CSI-RS SCS	-84.65	-120
	NR_FDD_SAB_FR1_B				-119.5
	NR_FDD_SAB_FR1_C				-119
	NR_FDD_SAB_FR1_D NR_FDD_SAB_FR1_E				-118.5
	NR_FDD_SAB_FR1_F NR_FDD_SAB_FR1_G				-118
	NR_FDD_SAB_FR1_H				-117.5
	NR_FDD_SAB_FR1_I				-117
	NR_FDD_SAB_FR1_J				-116.5
Io Note3	NR_FDD_SAB_FR1_A	1, 2	dBm/9.36 MHz	-56.28	-87.28
	NR_FDD_SAB_FR1_B				-86.78

	NR_FDD_SAB_FR1_C				-86.28
	NR_FDD_SAB_FR1_D NR_FDD_SAB_FR1_E				-85.78
	NR_FDD_SAB_FR1_F NR_FDD_SAB_FR1_G				-85.28
	NR_FDD_SAB_FR1_H				-84.78
	NR_FDD_SAB_FR1_I				-84.28
	NR_FDD_SAB_FR1_J				-83.78
$\hat{E}_s/N_{oc}$		1, 2	dB	10	-3
Propagation condition		1, 2		AWGN	AWGN
Antenna configuration		1, 2		1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					

A.14.6.4.2.3 Test Requirements

The L1-RSRP measurement accuracy for CSI-RS#0 and CSI-RS#1 of Cell 1 shall fulfil the requirements in clause 10.1.19C.2.

A.15 NR standalone tests with one or more NR cells in FR2-2

A.15.1 SA: RRC_IDLE state mobility

A.15.1.1 Cell re-selection to NR

A.15.1.1.1 Cell reselection to FR2-2 intra-frequency NR case

A.15.1.1.1.1 Test Purpose and Environment

This test is to verify the requirement for the intra frequency NR cell reselection requirements specified in clause 4.2.2.3.

A.15.1.1.1.2 Test Parameters

The test scenario comprises of 1 NR carrier and 2 cells as given in tables A.15.1.1.1.2-1, A.15.1.1.1.2-2 and A.15.1.1.1.2-3. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Only cell 1 is already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2.

Table A.15.1.1.1.2-1: Supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	480 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
3	960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.15.1.1.1.2-2: General test parameters for intra frequency NR cell re-selection test case

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3	Cell1	
T2 end condition	Active cell		1, 2, 3	Cell2	
	Neighbour cell		1, 2, 3	Cell1	
Final condition	Active cell		1, 2, 3	Cell1	
	Neighbour cell		1, 2, 3	Cell2	
RF Channel Number			1, 2, 3	1	
Time offset between cells			1, 2, 3	3 μs	Synchronous cells
Access Barring Information		-	1, 2, 3	Not Sent	No additional delays in random access procedure.
SMTC configuration			1, 2, 3	SMTC.1	
DRX cycle length		s	1, 2, 3	1.28	The value shall be used for all cells in the test.
PRACH configuration index			1, 2, 3	190	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2, 3	Not configured	

T1	s	1, 2, 3	>7	During T1, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed, The intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T2
T2	s	1, 2, 3	386	T2 needs to be defined so that cell re-selection reaction time is taken into account.
T3	s	1, 2, 3	78	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.15.1.1.1.2-3: Cell specific test parameters for intra frequency NR cell re-selection test case in AWGN

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1, 2, 3	TDDConf.3.1			TDDConf.3.1		
PDSCH RMC configuration		1	SR.3.1 TDD			SR.3.1 TDD		
		2	SR.3.1 TDD			SR.3.1 TDD		
		3	SR.3.1 TDD			SR.3.1 TDD		
RMSI CORESET RMC configuration		1	CR.3.1 TDD			CR.3.1 TDD		
		2	CR.3.1 TDD			CR.3.1 TDD		
		3	CR.3.1 TDD			CR.3.1 TDD		
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD			CCR.3.1 TDD		
		2	CCR.3.1 TDD			CCR.3.1 TDD		
		3	CCR.3.1 TDD			CCR.3.1 TDD		
SSB configuration		1	SSB.3 FR2			SSB.7 FR2		
		2	[SSB.x FR2]			[SSB.x FR2]		
		3	[SSB.x FR2]			[SSB.x FR2]		
OCNG Pattern		1, 2, 3	OP.4			OP.4		
$BW_{channel}$	MHz	1, 2, 3	100: $N_{RB,c}$ = 66			100: $N_{RB,c}$ = 66		
Data RBs allocated		1, 2, 3	66			66		
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2, 3	SSB			SSB		
Qrxlevmin	dBm/SCS	1	-138			-138		
		2	-132			-132		
		3	-129			-129		
Pcompensation	dB	1, 2, 3	0			0		
$Qhyst_s$	dB	1, 2, 3	0			0		
$Qoffset_{s,n}$	dB	1, 2, 3	0			0		
Cell_selection_and_reselection_quality_measurement		1, 2, 3	SS-RSRP			SS-RSRP		
AoA setup		1, 2, 3	Setup 1 defined in A.3.15.1			Setup 1 defined in A.3.15.1		
$\hat{E}_s / I_{ot}$	dB	1, 2, 3	8	-3	1.5	-infinity	1.5	-3
Beam assumption[Note 4]		1, 2, 3	Rough					

N_{oc} Note2	dBm/SCS	1	-93					
		2	-93					
		3	-90					
N_{oc} Note2	dBm/15 kHz	1	-102					
		2						
		3						
$\hat{E}_s / N_{oc}$	dB	1, 2, 3	8	-3	1.5	-infinity	1.5	-3
SS-RSRP Note3	dBm/SCS	1	-85	-96	-91.5	-infinity	-91.5	-96
		2	-85	-96	-91.5	-infinity	-91.5	-96
		3	-82	-93	-88.5	-infinity	-88.5	-93
Io on SSB symbols of each cell	dBm/95.04 MHz	1	-55.37	-63.25	-60.19	-64.01	-60.19	-63.25
	dBm/380.16 MHz	2	-55.37	-63.25	-60.19	-64.01	-60.19	-63.25
	dBm/380.16 MHz	3	-55.38	-63.26	-60.20	-64.02	-60.20	-63.26
Treselection	s	1, 2, 3	0	0	0	0	0	0
SintrasearchP	dB	1, 2, 3	50			50		
Propagation Condition		1, 2, 3	AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.15.1.1.1.3 Test Requirements

The cell reselection delay to a newly detectable cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration updateon Cell 2.

The cell re-selection delay to a newly detectable cell shall be less than 386 s.

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration updateon cell 1.

The cell re-selection delay to an already detected cell shall be less than 78 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a newly detectable cell can be expressed as: $T_{detect, NR_Intra} + T_{SI-NR}$, and to an already detected cell can be expressed as: $T_{evaluate, NR_ intra} + T_{SI-NR}$,

Where:

T_{detect, NR_Intra} See Table 4.2.2.3-1 in clause 4.2.2.3

$T_{evaluate, NR_ intra}$ See Table 4.2.2.3-1 in clause 4.2.2.3

T_{SI-NR} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 385.28 s, allow 386 s for the cell re-selection delay to a newly detectable cell and 78.08 s for the cell re-selection delay to an already detected cell in the test case, which we allow 78 s.

A.15.1.2 Cell reselection to FR2-2 inter-frequency NR case

A.15.1.2.1 Test Purpose and Environment

This test is to verify the requirement for the inter frequency NR cell reselection requirements specified in clause 4.2.2.4.

A.15.1.2.2 Test Parameters

The test scenario comprises of 2 cells on 2 different NR carriers respectively as given in tables A.15.1.2.2-1, A.15.1.2.2-2 and A.15.1.2.2-3. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas and cell 2 is of higher priority than cell 1. Furthermore, UE has not registered with network for the tracking area containing cell 2.

Table A.15.1.2.2-1: Supported test configurations

Configuration	Description for serving cell	Description for target cell
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	480 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode	480 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
3	960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode	960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.15.1.2.2-2: General test parameters for FR2-2 inter frequency NR cell re-selection test case

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3	Cell2	The UE camps on cell 2 in the initial phase and during T1 period the UE reselects to cell 1
	Neighbour cell		1, 2, 3	Cell1	
T1 end condition	Active cell		1, 2, 3	Cell1	The UE shall perform reselection to cell 1 during T1
	Neighbour cells		1, 2, 3	Cell2	
T3 end condition	Active cell		1, 2, 3	Cell2	The UE shall perform reselection to cell 2 with higher priority during T3
	Neighbour cell		1, 2, 3	Cell1	
RF Channel Number			1, 2, 3	1, 2	
Time offset between cells			1, 2, 3	3 μs	Synchronous cells
Access Barring Information		-	1, 2, 3	Not Sent	No additional delays in random access procedure.
SSB configuration			1	[SSB.x FR2-2]	
			2	[SSB.x FR2-2]	
			3	[SSB.x FR2-2]	
SMTC configuration			1, 2, 3	SMTC.1	
DRX cycle length		s	1, 2, 3	1.28	The value shall be used for all cells in the test.

PRACH configuration index		1, 2, 3	190	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell		1, 2, 3	Not configured	
T1	s	1, 2, 3	78	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2	s	1, 2, 3	>7	During T2, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T3.
T3	s	1, 2, 3	138	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.15.1.2.2-3: Cell specific test parameters for FR2-2 inter frequency NR cell re-selection test case in AWGN

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1, 2, 3	TDDConf.3.1			TDDConf.3.1		
PDSCH RMC configuration		1, 2, 3	SR.3.1 TDD			SR.3.1 TDD		
RMSI CORESET parameters		1, 2, 3	CR.3.1 TDD			CR.3.1 TDD		
RMSI CORESET RMC configuration		1, 2, 3	CCR.3.1 TDD			CCR.3.1 TDD		
OCNG Pattern		1, 2, 3	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2, 3	SSB			SSB		
Qrxlevmin	dBm/SCS	1	-140			-140		
		2	-134			-134		
		3	-131			-131		
Pcompensation	dB	1, 2, 3	0			0		
$Qhyst_s$	dB	1, 2, 3	0			0		
$Qoffset_{s,n}$	dB	1, 2, 3	0			0		
Cell_selection_and_reselection_quality_measurement		1, 2, 3	SS-RSRP			SS-RSRP		
AoA setup		1, 2, 3	Setup 1 defined in A.3.15.1			Setup 1 defined in A.3.15.1		
Beam assumption[Note 4]		1, 2, 3	Rough			Rough		
$\hat{E}_s/I_{ot}$	dB	1	10.5	10.5	8	-10.5	-infinity	8.5
		2						
		3						
N_{oc} [Note2]	dBm/SCS	1	-93			-93		
		2	-93			-93		
		3	-90			-90		
N_{oc} [Note2]	dBm/15 kHz	1, 2, 3	-102			-102		
$\hat{E}_s/N_{oc}$	dB	1, 2, 3	10.5	10.5	8	-10.5	-infinity	8.5

SS-RSRP Note3	dBm/SCS	1	-83.5	-83.5	-85	-103.5	-infinity	-84.5
		2	-83.5	-83.5	-85	-103.5	-infinity	-84.5
		3	-80.5	-80.5	-82.5	-100.5	-infinity	-81.5
Io	dBm/95.04 MHz	1	-51.97	-51.97	-55.46	-63.64	-64.01	-55.46
	dBm/380.16 MHz	2, 3	-51.99	-51.99	-55.48	-63.66	-64.03	-55.48
Treselection	s	1, 2, 3	0	0	0	0	0	0
SnonintrasearchP	dB	1, 2, 3	50			50		
$Thresh_{x, highP}$	dB	1, 2, 3	48			48		
$Thresh_{serving, lowP}$	dB	1, 2, 3	44			44		
$Thresh_{x, lowP}$	dB	1, 2, 3	50			50		
Propagation Condition		1, 2, 3	AWGN			AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.15.1.2.3 Test Requirements

The cell reselection delay to a higher priority cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration updateon cell 2.

The cell re-selection delay to a higher priority cell shall be less than 138 s.

The cell reselection delay to a lower priority cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration updateon cell 1.

The cell re-selection delay to a lower priority cell shall be less than 78 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a higher priority cell can be expressed as: $T_{higher_priority_search} + T_{evaluate, NR_inter} + T_{SI-NR}$, and to a lower priority cell can be expressed as: $T_{evaluate, NR_inter} + T_{SI-NR}$,

Where:

$T_{higher_priority_search}$ See clause 4.2.2.7

$T_{evaluate, NR_inter}$ See Table 4.2.2.4-1 in clause 4.2.2.4

T_{SI-NR} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 138.08 s, allow 138 s for the cell re-selection delay to a higher priority cell and 78.08 s for the cell re-selection delay to a lower priority cell in the test case, which we allow 78 s.

A.15.1.3 Cell reselection to FR2-2 intra-frequency NR case for UE fulfilling low mobility relaxed measurement criterion

A.15.1.3.1 Test Purpose and Environment

This test is to verify the requirement for the intra frequency NR cell reselection requirements for UE configured with relaxed measurement criterion specified in clause 4.2.2.9.2.

A.15.1.3.2 Test Parameters

The test scenario comprises of 1 NR carrier and 2 cells as given in tables A.15.1.3.2-1, A.15.1.3.2-2 and A.15.1.3.2-3. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. During T1 and T2, only criteria *lowMobilityEvalutation* is configured and fulfilled, where ($Srxlev_{Ref}$ – Srxlev) < $S_{SearchDeltaP}$. UE has not registered with network for the tracking area containing cell2.

Table A.15.1.3.2-1: Supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	480 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
3	960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.15.1.3.2-2: General test parameters for FR2-2 intra-frequency NR cell re-selection test case for UE fulfilling low mobility criterion

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3	Cell1	The UE camps on cell 1 in the initial phase
	Neighbour cells		1, 2, 3	Cell2	
T1 end condition	Active cell		1, 2, 3	Cell2	The UE reselects to cell 2 during T1 period
	Neighbour cells		1, 2, 3	Cell1	
Final condition	Active cell		1, 2, 3	Cell1	The UE reselects to cell 1 during T2 period
	Neighbour cells		1, 2, 3	Cell2	
RF Channel Number			1, 2, 3	1	
Time offset between cells			1, 2, 3	3 µs	Synchronous cells
Access Barring Information		-	1, 2, 3	Not Sent	No additional delays in random access procedure.
SMTC configuration			1, 2, 3	SMTC pattern 1	
DRX cycle length		s	1, 2, 3	0.64	The value shall be used for all cells in the test.
PRACH configuration index			1, 2, 3	190	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2, 3	Not configured	
T1		s	1, 2, 3	240	
T2		s	1, 2, 3	240	

Table A.15.1.3.2-3: Cell specific test parameters for FR2-2 intra-frequency NR cell re-selection test case in AWGN for UE fulfilling low mobility criterion

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2, 3	TDDConf.3.1		TDDConf.3.1	
PDSCH RMC configuration		1	SR.3.1 TDD		SR.3.1 TDD	
		2	SR.3.1 TDD		SR.3.1 TDD	
		3	SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET RMC configuration		1	CR.3.1 TDD		CR.3.1 TDD	
		2	CR.3.1 TDD		CR.3.1 TDD	
		3	CR.3.1 TDD		CR.3.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD		CCR.3.1 TDD	
		2	CCR.3.1 TDD		CCR.3.1 TDD	
		3	CCR.3.1 TDD		CCR.3.1 TDD	
SSB configuration		1	[SSB.x FR2-2]		[SSB.x FR2-2]	
		2	[SSB.x FR2-2]		[SSB.x FR2-2]	
		3	[SSB.x FR2-2]		[SSB.x FR2-2]	
OCNG Pattern		1, 2, 3	OP.4		OP.4	
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1, 2, 3	SSB		SSB	
Qrxlevmin	dBm/SCS	1	-140		-140	
		2	-134		-134	
		3	-131		-131	
$S_{SearchDeltaP}$	dB	1, 2, 3	6		6	
$T_{SearchDeltaP}$	s	1, 2, 3	5		5	
Pcompensation	dB	1, 2, 3	0		0	
$Qhyst_s$	dB	1, 2, 3	0		0	
$Qoffset_{s,n}$	dB	1, 2, 3	0		0	
Cell_selection_and_reselection_quality_measurement		1, 2, 3	SS-RSRP		SS-RSRP	
AoA setup		1, 2, 3	Setup 1 defined in A.3.15.1		Setup 1 defined in A.3.15.1	
Beam assumption[Note 4]		1, 2, 3	Rough		Rough	
$\hat{E}_s/I_{ot}$	dB	1, 2, 3	-3	1.5	1.5	-3
N_{oc} [Note2]	dBm/SCS	1	-93			
		2	-93			
		3	-90			
N_{oc} [Note2]	dBm/15 kHz	1, 2, 3	-102			
$\hat{E}_s/N_{oc}$	dB	1, 2, 3	-3	1.5	1.5	-3
SS-RSRP [Note3]	dBm/SCS	1	-96	-91.5	-91.5	-96
		2	-96	-91.5	-91.5	-96
		3	-93	-88.5	-88.5	-93
Io on SSB symbols of each cell	dBm/95.04 MHz	1	-62.45	-60.19	-60.19	-62.45
	dBm/380.16 MHz	2	-62.45	-60.19	-60.19	-62.45
	dBm/380.16 MHz	3	-62.46	-60.20	-60.20	-62.46
Treselection	s	1, 2, 3	0	0	0	0
SintrasearchP	dB	1, 2, 3	50		50	

Propagation Condition		1, 2, 3	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.15.1.3.3 Test Requirements

The cell reselection delay to an already detected cell for UE fulfilling low mobility relaxed criterion is defined as the time from the beginning of time period T1, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 2.

The cell re-selection delay to an already detected cell shall be less than 232 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to an already detectable cell can be expressed as: $T_{evaluate, NR_Intra} + T_{SI\text{-}NR}$,

Where:

$T_{evaluate, NR_Intra}$ See Table 4.2.2.9.2-1 in clause 4.2.2.9,

$T_{SI\text{-}NR}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 231.68 s, allow 232 s for the cell re-selection delay to an already detected cell for UE fulfilling low mobility criterion in the test case.

A.15.1.4 Cell reselection to FR2-2 intra-frequency NR case for UE fulfilling not-at-cell edge relaxed measurement criterion

A.15.1.4.1 Test Purpose and Environment

This test is to verify the requirement for the intra frequency NR cell reselection requirements for UE configured with relaxed measurement criterion specified in clause 4.2.2.9.3.

A.15.1.4.2 Test Parameters

The test scenario comprises of 1 NR carrier and 2 cells as given in tables A.15.1.4.2-1, A.15.1.4.2-2 and A.15.1.4.2-3. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. During T1 and T2, only criteria *cellEdgeEvaluation* is configured and fulfilled, where Srxlev> $S_{SearchThresholdP}$. UE has not registered with network for the tracking area containing cell2.

Table A.15.1.4.2-1: Supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	480 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
3	960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.15.1.4.2-2: General test parameters for FR2-2 intra-frequency NR cell re-selection test case for UE fulfilling not-at-cell edge criterion

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3	Cell1	The UE camps on cell 1 in the initial phase
	Neighbour cells		1, 2, 3	Cell2	
T1 end condition	Active cell		1, 2, 3	Cell2	The UE reselects to cell 2 during T1 period
	Neighbour cells		1, 2, 3	Cell1	
Final condition	Active cell		1, 2, 3	Cell1	
	Neighbour cells		1, 2, 3	Cell2	
RF Channel Number			1, 2, 3	1	
Time offset between cells			1, 2, 3	3 μs	Synchronous cells
Access Barring Information		-	1, 2, 3	Not Sent	No additional delays in random access procedure.
SMTC configuration			1, 2, 3	SMTC pattern 1	
DRX cycle length		s	1, 2, 3	0.64	The value shall be used for all cells in the test.
PRACH configuration index			1, 2, 3	190	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2, 3	Not configured	
T1		s	1, 2, 3	240	
T2		s	1, 2, 3	240	

Table A.15.1.4.2-3: Cell specific test parameters for FR2-2 intra-frequency NR cell re-selection test case in AWGN for UE fulfilling not-at-cell edge criterion

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2, 3	TDDConf.3.1		TDDConf.3.1	
PDSCH RMC configuration		1	SR.3.1 TDD		SR.3.1 TDD	
		2	SR.3.1 TDD		SR.3.1 TDD	
		3	SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET RMC configuration		1	CR.3.1 TDD		CR.3.1 TDD	
		2	CR.3.1 TDD		CR.3.1 TDD	
		3	CR.3.1 TDD		CR.3.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD		CCR.3.1 TDD	
		2	CCR.3.1 TDD		CCR.3.1 TDD	
		3	CCR.3.1 TDD		CCR.3.1 TDD	
SSB configuration		1	[SSB.x FR2-2]		[SSB.x FR2-2]	
		2	[SSB.x FR2-2]		[SSB.x FR2-2]	
		3	[SSB.x FR2-2]		[SSB.x FR2-2]	
OCNG Pattern		1, 2, 3	OP.4		OP.4	
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1, 2, 3	SSB		SSB	
Qrxlevmin	dBm/SCS	1	-140		-140	
		2	-134		-134	
		3	-131		-131	
Pcompensation	dB	1, 2, 3	0		0	
$Qhyst_s$	dB	1, 2, 3	0		0	

$Qoffset_{s,n}$	dB	1, 2, 3	0		0	
Cell_selection_and_reselection_quality_measurement		1, 2, 3	SS-RSRP		SS-RSRP	
AoA setup		1, 2, 3	Setup 1 defined in A.3.15.1		Setup 1 defined in A.3.15.1	
Beam assumption Note 4		1, 2, 3	Rough		Rough	
$\hat{E}_s/I_{ot}$	dB	1, 2, 3	-3	1.5	1.5	-3
N_{oc} Note2	dBm/SCS	1	-93			
		2	-93			
		3	-90			
N_{oc} Note2	dBm/15 kHz	1, 2, 3	-102			
$\hat{E}_s/N_{oc}$	dB	1, 2, 3	-3	1.5	1.5	-3
SS-RSRP Note3	dBm/SCS	1	-96	-91.5	-91.5	-96
		2	-96	-91.5	-91.5	-96
		3	-93	-88.5	-88.5	-93
Io on SSB symbols of each cell	dBm/95.04 MHz	1	-62.25	-60.19	-60.19	-62.25
	dBm/380.16 MHz	2	-62.25	-60.19	-60.19	-62.25
	dBm/380.16 MHz	3	-62.27	-60.21	-60.21	-62.27
Treselection	s	1, 2, 3	0	0	0	0
$S_{SearchThresholdP}$		1, 2, 3	35	35	35	35
SintrasearchP	dB	1, 2, 3	50		50	
Propagation Condition		1, 2, 3	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.15.1.4.3 Test Requirements

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on Cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 1.

The cell re-selection delay to an already detected cell shall be less than 232 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to an already detected cell can be expressed as: $T_{evaluate,\ NR_Intra} + T_{SI\text{-}NR}$,

Where:

$T_{evaluate,\ NR_Intra}$ See Table 4.2.2.9.3-1 in clause 4.2.2.9,

$T_{SI\text{-}NR}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 231.68 s, allow 232 s for the cell re-selection delay to an already detected cell for UE fulfilling not-at-cell edge criterion in the test case.

A.15.1.5 Cell reselection to FR2-2 inter-frequency NR case for UE fulfilling low mobility relaxed measurement criterion

A.15.1.5.1 Test Purpose and Environment

This test is to verify the requirement for the inter frequency NR cell reselection requirements for UE fulfilling low mobility criterion specified in clause 4.2.2.10.2.

A.15.1.5.2 Test Parameters

The test scenario comprises of 2 cells (Cell 1 and Cell 2) on 2 different NR carriers respectively as given in tables A.15.1.5.2-1, A.15.1.5.2-2 and A.15.1.5.2-3. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and Cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing Cell 2. Cell 2 is of higher priority than Cell 1. The UE is configured with l*owMobilityEvalutation* criterion [2].

Table A.15.1.5.2-1: Supported test configurations

Configuration	Description for serving cell	Description for target cell
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	480 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode	480 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
3	960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode	960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.15.1.5.2-2: General test parameters for FR2-2 inter frequency NR cell re-selection test case for UE fulfilling low mobility criterion

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3	Cell2	The UE camps on cell2 and fulfils low mobility (*lowMobilityEvalutation* [2]) criterion.
	Neighbour cell		1, 2, 3	Cell1	
T1 final condition	Active cell		1, 2, 3	Cell1	The UE reselects to low priority cell1 during T1
	Neighbour cell		1, 2, 3	Cell2	
T2 final condition	Active cell		1, 2, 3	Cell2	The UE reselects to high priority cell2 during T2
	Neighbour cell			Cell1	
RF Channel Number			1, 2, 3	1, 2	
Time offset between cells			1, 2, 3	3 μs	Synchronous cells
Access Barring Information		-	1, 2, 3	Not Sent	No additional delays in random access procedure.
SSB configuration			1	[SSB.x FR2-2]	
			2	[SSB.x FR2-2]	
			3	[SSB.x FR2-2]	
SMTC configuration			1, 2, 3	SMTC pattern 1	

DRX cycle length	s	1, 2, 3	0.64	The value shall be used for all cells in the test.
PRACH configuration index		1, 2, 3	190	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell		1, 2, 3	Not configured	
T1	s	1, 2, 3	240	T1 needs to be long enough to allow cell re-selection to already known cell1
T2	s	1, 2, 3	240	T2 needs to be long enough to allow cell re-selection to already known cell2

Table A.15.1.5.2-3: Cell specific test parameters for FR2-2 inter frequency NR cell re-selection test case in AWGN for UE fulfilling low mobility criterion

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2, 3	TDDConf.3.1		TDDConf.3.1	
PDSCH RMC configuration		1, 2, 3	SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET parameters		1, 2, 3	CR.3.1 TDD		CR.3.1 TDD	
RMSI CORESET RMC configuration		1, 2, 3	CCR.3.1 TDD		CCR.3.1 TDD	
OCNG Pattern		1, 2, 3	OP.1 defined in A.3.2.1		OP.1 defined in A.3.2.1	
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1, 2, 3	SSB		SSB	
Qrxlevmin	dBm/SCS	1	-140		-140	
		2	-137		-137	
		3				
Pcompensation	dB	1, 2, 3	0		0	
$Qhyst_s$	dB	1, 2, 3	0		0	
$Qoffset_{s,n}$	dB	1, 2, 3	0		0	
Cell_selection_and_reselection_quality_measurement		1, 2, 3	SS-RSRP		SS-RSRP	
AoA setup		1, 2, 3	Setup 1 defined in A.3.15.1		Setup 1 defined in A.3.15.1	
Beam assumption Note 4		1, 2, 3	Rough		Rough	
$\hat{E}_s/I_{ot}$	dB	1, 2, 3	10.5	8	-10.5	-8.5
N_{oc} Note2	dBm/SCS	1	-93		-93	
		2	-93		-93	
		3	-90		-90	
N_{oc} Note2	dBm/15 kHz	1, 2, 3	-102		-102	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3	10.5	8	-10.5	8.5
SS-RSRP Note3	dBm/SCS	1	-82.5	-85	-103.5	-84.5
		2	-82.5	-85	-103.5	-84.5
		3	-79.5	-82	-100.5	-81.5
Io	dBm/95.04 MHz	1	-53.14	-55.37	-55.37	-53.14
	dBm/380.16 MHz	2	-53.14	-55.37	-55.37	-53.14
	dBm/380.16 MHz	3	-53.17	-55.39	-55.39	-53.16
TreselectionNR	s	1, 2, 3	0		0	
SnonintrasearchP	dB	1, 2, 3	50		Not sent	

$S_{SearchDeltaP}$	dB	1, 2, 3	6	6
$T_{SearchDeltaP}$	s	1, 2, 3	5	5
$Thresh_{x, highP}$	dB	1, 2, 3	48	48
$Thresh_{serving, lowP}$	dB	1, 2, 3	44	44
$Thresh_{x, lowP}$	dB	1, 2, 3	50	50
Propagation Condition		1, 2, 3	AWGN	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.15.1.5.3 Test Requirements

The cell reselection delay to an already detected low priority cell (Cell 1) for UE fulfilling low mobility criterion is defined as the time from the beginning of time period T1, to the moment when the UE camps on Cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 1.

The cell re-selection delay to an already detected low priority cell, Cell 1, shall be less than 232 s.

The cell reselection delay to an already detected high priority cell (Cell 2) for UE fulfilling low mobility criterion is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 2.

The cell re-selection delay to an already detected high priority cell, Cell 2, shall be less than 232 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE 1: The cell re-selection delay to an already detected low priority cell can be expressed as: $T_{evaluate, NR_ inter} + T_{SI-NR}$

NOTE 2: The cell re-selection delay to an already detected higher priority cell can be expressed as: $T_{evaluate, NR_ inter} + T_{SI-NR}$

Where:

$T_{evaluate, NR_ inter}$ See Table 4.2.2.10.2-1 in clause 4.2.2.10.2

T_{SI-NR} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 231.68 s, allow 232 s for the cell re-selection delay to an already detected low priority cell for UE fulfilling low mobility criterion in the test case.

This gives a total of 231.68 s, allow 232 s for the cell re-selection delay to an already detected high priority cell for UE fulfilling low mobility criterion in the test case.

A.15.1.6 Cell reselection to FR2-2 inter-frequency NR case for UE fulfilling not-at-cell edge relaxed measurement criterion

A.15.1.6.1 Test Purpose and Environment

This test is to verify the requirement for the inter frequency NR cell reselection requirements for UE fulfilling not-at-cell edge criterion specified in clause 4.2.2.10.3.

A.15.1.6.2 Test Parameters

The test scenario comprises of 2 cells (Cell 1 and Cell 2) on 2 different NR carriers respectively as given in tables A.15.1.6.2-1, A.15.1.6.2-2 and A.15.1.6.2-3. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and Cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing Cell 2. Cell 2 is of higher priority than Cell 1. The UE is configured with *cellEdgeEvaluation* criterion [2].

Table A.15.1.6.2-1: Supported test configurations

Configuration	Description for serving cell	Description for target cell
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	480 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode	480 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
3	960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode	960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.15.1.6.2-2: General test parameters for FR2-2 inter frequency NR cell re-selection test case for UE fulfilling not-at-cell edge criterion

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3	Cell2	The UE camps on cell2 and fulfils not-at-cell edge (*cellEdgeEvaluation* [2]) criterion.
	Neighbour cell		1, 2, 3	Cell1	
T1 final condition	Active cell		1, 2, 3	Cell1	The UE reselects to low priority cell1 during T1
	Neighbour cell		1, 2, 3	Cell2	
T2 final condition	Active cell		1, 2, 3	Cell2	The UE reselects to high priority cell2 during T2
	Neighbour cell		1, 2, 3	Cell1	
RF Channel Number			1, 2, 3	1, 2	
Time offset between cells			1, 2, 3	3 μs	Synchronous cells
Access Barring Information		-	1, 2, 3	Not Sent	No additional delays in random access procedure.
SSB configuration			1	[SSB.x FR2-2]	
			2	[SSB.x FR2-2]	
			3	[SSB.x FR2-2]	
SMTC configuration			1, 2, 3	SMTC pattern 1	
DRX cycle length		s	1, 2, 3	0.64	The value shall be used for all cells in the test.
PRACH configuration index			1, 2, 3	190	The detailed configuration is specified in TS 38.211 clause 6.3.3.2

rangeToBestCell		1, 2, 3	Not configured	
T1	s	1, 2, 3	240	T1 needs to be long enough to allow cell re-selection to already known cell.
T2	s	1, 2, 3	240	T2 needs to be long enough to allow cell re-selection to already known cell.

Table A.15.1.6.2-3: Cell specific test parameters for FR2-2 inter frequency NR cell re-selection test case in AWGN for UE fulfilling not-at-cell edge criterion

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2, 3	TDDConf.3.1		TDDConf.3.1	
PDSCH RMC configuration		1, 2, 3	SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET parameters		1, 2, 3	CR.3.1 TDD		CR.3.1 TDD	
RMSI CORESET RMC configuration		1, 2, 3	CCR.3.1 TDD		CCR.3.1 TDD	
OCNG Pattern		1, 2, 3	OP.1 defined in A.3.2.1		OP.1 defined in A.3.2.1	
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1, 2, 3	SSB		SSB	
Qrxlevmin	dBm/SCS	1	-140		-140	
		2	-134		-134	
		3	-131		-131	
Pcompensation	dB	1, 2, 3	0		0	
$Qhyst_s$	dB	1, 2, 3	0		0	
$Qoffset_{s,n}$	dB	1, 2, 3	0		0	
Cell_selection_and_reselection_quality_measurement		1, 2, 3	SS-RSRP		SS-RSRP	
AoA setup		1, 2, 3	Setup 1 defined in A.3.15.1		Setup 1 defined in A.3.15.1	
Beam assumption[Note 4]		1, 2, 3	Rough		Rough	
$\hat{E}_s/I_{ot}$	dB	1, 2, 3	10.5	8	-10.5	8.5
N_{oc} [Note2]	dBm/SCS	1	-93		-93	
		2	-93		-93	
		3	-90		-90	
N_{oc} [Note2]	dBm/15 kHz	1, 2, 3	-102		-102	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3	10.5	8	-10.5	8.5
SS-RSRP [Note3]	dBm/SCS	1	-82.5	-85	-103.5	-84.5
		2	-82.5	-85	-103.5	-84.5
		3	-79.5	-82	-100.5	-81.5
Io	dBm/95.04 MHz	1	-53.14	-55.37	-55.37	-53.14
	dBm/380.16 MHz	2	-53.14	-55.37	-55.37	-53.14
	dBm/380.16 MHz	3	-53.16	-55.38	-55.38	-53.16
$S_{SearchThresholdP}$		1, 2, 3	35	35	29	29
TreselectionNR	s	1, 2, 3	0		0	
SnonintrasearchP	dB	1, 2, 3	50		Not sent	
$Thresh_{x,highP}$	dB	1, 2, 3	48		48	
$Thresh_{serving,lowP}$	dB	1, 2, 3	44		44	
$Thresh_{x,lowP}$	dB	1, 2, 3	50		50	

Propagation Condition		1, 2, 3	AWGN	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.15.1.6.3 Test Requirements

The cell reselection delay to an already detected low priority cell (Cell 1) for UE fulfilling not-at-cell edge criterion is defined as the time from the beginning of time period T1, to the moment when the UE camps on Cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 1.

The cell re-selection delay to an already detected low priority cell, Cell 1, shall be less than 232 s.

The cell reselection delay to an already detected high priority cell (Cell 2) for UE fulfilling not-at-cell edge criterion is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 2.

The cell re-selection delay to an already detected high priority cell, Cell 2, shall be less than 232 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE 1: The cell re-selection delay to an already detected low priority cell can be expressed as: $T_{evaluate,\ NR_\ inter} + T_{SI\text{-}NR}$

NOTE 2: The cell re-selection delay to an already detected higher priority cell can be expressed as: $T_{evaluate,\ NR_\ inter} + T_{SI\text{-}NR}$

Where:

$T_{evaluate,\ NR_\ inter}$ See Table 4.2.2.10.3-1 in clause 4.2.2.10.3

$T_{SI\text{-}NR}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280ms is assumed in this test case.

This gives a total of 231.68 s, allow 232 s for the cell re-selection delay to an already detected low priority cell for UE fulfilling not-at-cell edge criterion in the test case.

This gives a total of 231.68 s, allow 232 s for the cell re-selection delay to an already detected high priority cell for UE fulfilling not-at-cell edge criterion in the test case.

A.15.2 Signaling characteristics

A.15.2.1 SCell Activation and Deactivation Delay

A.15.2.1.1 SCell Activation and deactivation for SCell in FR2-2 intra-band in non-DRX

A.15.2.1.1.1 Test Purpose and Environment

The purpose of this test case is the same as for the test defined in clause A.6.5.3.1.1 except the PCell and SCell are in FR2-2 intra-band.

The supported test configurations are shown in table A.15.2.1.1.1-1 below. The general test parameters are the same as defined in Table A.6.5.3.1.1-2 except those described in Tables A.14.X.3.1.1-2, and cell specific test parameters are described in Tables A.15.2.1.1.1-3. OTA related test parameters are shown in table A.15.2.1.1.1-4 below.

Table A.15.2.1.1.1-1: Supported test configurations for FR2-2 SCell activation case

Configuration	Description
1	NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
2	NR 480 kHz SSB SCS, 400MHz bandwidth, TDD duplex mode
3	NR 960 kHz SSB SCS, 400MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.15.2.1.1.1-2: General test parameters for FR2-2 SCell activation case

Parameter	Unit	Value	Comment
RF Channel Number		1,2	Two NR radio channels are used for this test, cell 1 and cell2 use RF channel 1 and 2, respectively.

Table A.15.2.1.1.1-3: Cell specific test parameters for FR2-2 SCell activation case

Parameter[Note 5]		Unit	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
SSB ARFCN			freq1			freq2		
Duplex mode	Config 1, 2, 3		TDD					
TDD configuration	Config 1, 2, 3		TDDConf.3.1					
Downlink initial BWP Configuration	Config 1, 2, 3		DLBWP.0.1					
Downlink dedicated BWP Configuration	Config 1, 2, 3		DLBWP.1.1					
Uplink initial BWP configuration	Config 1, 2, 3		ULBWP.0.1					
Uplink dedicated BWP configuration	Config 1, 2, 3		ULBWP.1.1					
TRS configuration	Config 1, 2, 3		TRS.2.1 TDD					
TCI state	Config 1, 2, 3		TCI.State.0					
$BW_{channel}$	Config 1, 2, 3	MHz	100: $N_{RB,c}$ = 66					
Data RBs allocated	Config 1, 2, 3		66	66		66		
PDSCH Reference measurement channel	Config 1, 2, 3		SR.3.1 TDD			-		
RMSI CORESET Parameters	Config 1, 2, 3		CR.3.1 TDD			-		
Dedicated CORESET Parameters	Config 1, 2, 3		CCR.3.1 TDD			-		
OCNG Patterns	Config 1, 2, 3		OP.1					
SSB Configuration	Config 1, 2, 3		SSB.1 FR2-2					
SMTC Configuration	Config 1, 2, 3		SMTC.1					

CSI-RS configuration for CSI reporting	Config 1, 2, 3		CSI-RS.3.1 TDD	
reportConfigType	Config 1, 2, 3		periodic	N/A
reportQuantity	Config 1, 2, 3		cri-RI-PMI-CQI	N/A
CSI reporting periodicity	Config 1, 2, 3	slot	40	N/A
CSI reporting offset	Config 1, 2, 3	slot	4	N/A
EPRE ratio of PSS to SSS	Config 1, 2, 3	dB	0	
EPRE ratio of PBCH_DMRS to SSS				
EPRE ratio of PBCH to PBCH_DMRS				
EPRE ratio of PDCCH_DMRS to SSS				
EPRE ratio of PDCCH to PDCCH_DMRS				
EPRE ratio of PDSCH_DMRS to SSS				
EPRE ratio of PDSCH to PDSCH_DMRS				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
Propagation conditions	Config 1, 2, 3		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Void Note 3: Void Note 4: Void Note 5: Void				

Table A.15.2.1.1.1-4: OTA related test parameters for FR2-2 SCell activation case

Parameter		Unit	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Angle of arrival configuration	Config 1, 2 ,3		Setup 1 according to table A.3.15.1			Setup 1 according to table A.3.15.1		
Assumption for UE beams Note 4	Config 1, 2 ,3		Rough			Rough		
N_{oc} Note1		dBm/15kHz Note3	-104.7			-104.7		
N_{oc} Note1	Config 1	dBm/SCS	-95.7			-95.7		
	Config 2		-95.7			-95.7		
	Config 3		-92.7			-92.7		
$\hat{E}_s / N_{oc}$		dB	7			7		
SSB_RP Note2	Config 1	dBm/SCS Note4	-88.7			-88.7		
	Config 2		-88.7			-88.7		
	Config 3		-85.7			-85.7		
$\hat{E}_s / I_{ot}$		dB	7			7		
Io Note2	Config 1	dBm/95.04 MHz Note3	-58.92			-58.92		
	Config 2	dBm/380.16 MHz	-58.92			-58.92		
	Config 3	dBm/380.16 MHz	-58.93			-58.93		

Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2:	Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 4:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.

A.15.2.1.1.2 Test Requirements

The test requirements defined in clause A.6.5.3.1.2 shall apply to this test case, except $T_{activation_time}$ will be replaced with the value $T_{FirstSSB}$ + 5ms as defined in clause 8.3.

A.15.2.1.2 SCell Activation and deactivation for FR1+FR2-2 inter-band with target SCell in FR2-2

A.15.2.1.2.1 Test Purpose and Environment

The purpose of this test case is the same as for the test defined in clause A.15.2.1.1.1 except the PCell is in FR1 and SCell is in FR2-2.

The supported test configurations are defined in Table A.15.2.1.2.1-1. The general test parameters are the same as defined in Table A.15.2.1.1.1-2 except that the length of T2 is 2s. And cell specific test parameters are described in Tables A.15.2.1.2.1-2. OTA related test parameters are defined in Table A.15.2.1.2.1-3.

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 2) becomes configured on NR. During T1 the SCell is powered off and UE is not aware of SCell.

A MAC message for activation of SCell is sent by the test equipment 100ms after the RRC message, in a slot # denoted m. The point in time at which the MAC message for activation of SCell is received at the UE antenna connector defines the start of time period T2.

During T2, the test equipment monitors the L1-RSRP measurement reporting for the SCell. The time when test equipment receives a valid L1-RSRP report is denoted as slot $m+T_{L1\text{-}RSRP}$. In the next DL slot after slot $m+T_{L1\text{-}RSRP}$, the test equipment sends a MAC message for the activation of the TCI state of the RMC CORESET of the SCell. In the same slot, the test equipment also sends an RRC message to configure the CSI-RS resources for SCell.

Time period T3 starts when a MAC message for deactivation of the SCell, sent from the test equipment to the UE in a slot # denoted n, is received at the UE antenna connector.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell and PCell during activation of SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The test equipment verifies the deactivation time by counting the slots from the time when the SCell1 deactivation command is sent until CSI reporting for SCell1 is discontinued.

Table A.15.2.1.2.1-1: Supported test configurations for FR2-2 SCell activation case

Configuration	Description
1	PCell: 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode Target SCell: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
2	PCell: 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode Target SCell: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
3	PCell: 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode Target SCell: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode

4	PCell: 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode Target SCell: 480 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
5	PCell: 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode Target SCell: 960 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations	

Table A.15.2.1.2.1-2: Cell specific test parameters for FR2-2 SCell activation case

Parameter[Note 5]		Unit	Cell 1			Cell 2		
			T1	T2			T1	T2
SSB ARFCN			Freq1			Freq2		
Duplex mode	Config 1		FDD			TDD		
	Config 2,3,4,5		TDD					
TDD configuration	Config 1		Not Applicable			TDDConf.3.1		
	Config 2		TDDConf.1.1					
	Config 3,4,5		TDDConf.2.1					
Downlink initial BWP Configuration	Config 1,2,3,4,5		DLBWP.0.1					
Downlink dedicated BWP Configuration	Config 1,2,3,4,5		DLBWP.1.1					
Uplink initial BWP configuration	Config 1,2,3,4,5		ULBWP.0.1					
Uplink dedicated BWP configuration	Config 1,2,3,4,5		ULBWP.1.1					
TRS configuration	Config 1,2,3,4,5		N/A			TRS.2.1 TDD		
TCI state	Config 1,2,3,4,5		TCI.State.0					
$BW_{channel}$	Config 1,2	MHz	10: $N_{RB,c}$ = 52			100: $N_{RB,c}$ = 66		
	Config 3,4,5		40: $N_{RB,c}$ = 106					
Data RBs allocated	Config 1,2		52	66	52	66	52	66
	Config 3,4,5		106		106		106	
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD			-		
	Config 2		SR.1.1 TDD					
	Config 3,4,5		SR.2.1 TDD					
RMSI CORESET Parameters	Config 1		CR.1.1 FDD			-		
	Config 2		CR.1.1 TDD					
	Config 3,4,5		CR.2.1 TDD					
Dedicated CORESET Parameters	Config 1		CCR.1.1 FDD			-		
	Config 2		CCR.1.1 TDD					
	Config 3,4,5		CCR.2.1 TDD					
OCNG Patterns			OP.1					
SSB configuration	Config 1,2		SSB.1 FR1			[SSB.x FR2-2]		
	Config 3		SSB.2 FR1			[SSB.x FR2-2]		
	Config 4					[SSB.x FR2-2]		
	Config 5					[SSB.x FR2-2]		
CSI-RS configuration for CSI reporting	Config 1,2,3,4,5		N/A			N/A	CSI-RS.3.1 TDD Note 6	CSI-RS.3.1 TDD
reportConfigType for CSI reporting			periodic			N/A		
reportConfigType for L1-RSRP			periodic			N/A		
reportQuantity for CSI reporting			cri-RI-PMI-CQI			N/A		
reportQuantity for L1-RSRP			ssb-Index-RSRP			N/A		
CSI reporting periodicity	Config 1,2	slot	5			N/A		
	Config 3,4,5		10					
	Config 1,2	slot	5			N/A		

L1-RSRP reporting periodicity Note 7	Config 3,4,5		10	
CSI reporting offset	Config 1,2	slot	2	N/A
	Config 3,4,5		4	
L1-RSRP reporting offset	Config 1,2	slot	2	N/A
	Config 3,4,5		4	
SMTC configuration			SMTC.1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH_DMRS to SSS				
EPRE ratio of PBCH to PBCH_DMRS				
EPRE ratio of PDCCH_DMRS to SSS				
EPRE ratio of PDCCH to PDCCH_DMRS				
EPRE ratio of PDSCH_DMRS to SSS				
EPRE ratio of PDSCH to PDSCH_DMRS				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
Propagation conditions			N/A Link only, see clause A.3.7A	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: Void
Note 4: Void
Note 5: All parameters apply for configuration 1, 2 and 3
Note 6: CSI-RS for CSI measurement is (re)configured in the next DL slot after slot m+$T_{L1\text{-}RSRP}$ during T2.
Note 7: L1-RSRP measurement and reporting are configured to the the UE prior to the start of time period T1.

Table A.15.2.1.2.1-3: OTA related test parameters for FR1 PCell activation case with FR2-2 SCell

Parameter		Unit	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Angle of arrival configuration			N/A			According to clause A.3.15.1		
Assumption for UE beams Note 7			N/A			Rough		
N_{oc} Note 1	Config 1,2,3	dBm/15kHz	Link only, see clause A.3.7A			-104.7		
N_{oc} Note 1	Config 1,2,3	dBm/SCS				-95.7		
	Config 4					-95.7		
	Config 5					-92.7		
$\hat{E}_s / N_{oc}$	Config 1,2,3,4,5	dB				-∞	7	7
[illegible]	Config 1,2,3,4,5	dB				-∞	7	7
SSB_RP Note 2, Note 4	Config 1,2,3	dBm/SCS				-∞	-88.7	-88.7
	Config 4					-∞	-88.7	-88.7
	Config 5					-∞	-85.7	-85.7
Io Note 2, Note 4	Config 1,2,3	dBm/95.04 MHz				-66.71	-58.92	-58.92
		dBm/380.16 MHz				-66.71	-58.92	-58.92

		dBm/380.16 MHz		-66.72	-58.93	-58.93

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: Void
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: Void
Note 6: Void
Note 7: Information about types of UE beam is given in B.2.1.3 and does not imit UE implementation or test system implementation.

A.15.2.1.2.2 Test Requirements

During T2 the UE shall send the first CSI report for SCell in the first available uplink resource after at least one CSI-RS transmission occasion for channel measurement and reporting after slot (m+k). UE is allowed to postpone CSI report to next available UL resource if an available uplink resource is subject to interruption. Whether CSI report in a slot was interrupted is checked by monitoring ACK/NACK sent in PCell in the slot.

During T2 the UE shall start sending valid L1-RSRP report for the SCell in the configured slots for CSI reporting after slot ($m+T_{L1\text{-}RSRP}$), where $T_{L1\text{-}RSRP}$ is no larger than

$3ms + T_{FirstSSB_MAX} + 23*T_{SMTC_MAX} + 12*T_{rs} + T_{L1\text{-}RSRP,\ measure} + T_{L1\text{-}RSRP,\ report}$

as defined in clause 8.3.2. For this test case, $T_{FirstSSB_MAX}=T_{SMTC_MAX}=T_{rs}=20ms$; $T_{L1\text{-}RSRP,\ measure}=240ms$ and $T_{L1\text{-}RSRP,\ report}=5ms$, which allows $T_{L1\text{-}RSRP}$ [980] ms.

During T2 the UE shall start sending CSI reports for the SCell with non-zero CQI index in the configured slots for CSI reporting no later than slot $m + \frac{T_{HARQ} + T_{activtion_time} + T_{CSI_Reporting}}{NR\ slot\ length}$, where

- T_{HARQ} is defined in Table A.5.5.3.1.1-2
- $T_{activation_time} = 3ms + T_{FirstSSB_MAX} + 23*T_{SMTC_MAX} + 12*T_{rs} + T_{L1\text{-}RSRP,\ measure} + T_{L1\text{-}RSRP,\ report} + \max\{(T_{HARQ} + T_{uncertainty_MAC} + 5ms + T_{FineTiming}), (T_{uncertainty_RRC} + T_{RRC_delay})\}$, which allows [1100] ms
- $T_{CSI_Reporting} = 10ms$
- NR slot length is 0.125ms for this test case.

During T3 the UE shall stop sending CSI reports for both SCells no later than slot $n + \frac{T_{HARQ} + 3ms}{NR\ slot\ length}$, as defined in clause 8.3.

During T2 interruption of PCell during SCell activation shall not happen outside the slot $m + 1 + \frac{T_{HARQ}}{\text{NR slot length}}$ to $m + 1 + \frac{T_{HARQ} + 3ms + T_X}{\text{NR slot length}}$, as defined in clause 8.3, where $T_X = 20ms$.

During T3 the starting point of interruption of PCell during SCell deactivation shall not happen outside the slot $n + 1 + \frac{T_{HARQ}}{NR\ slot\ length}$ to $n + 1 + \frac{T_{HARQ} + 3ms}{NR\ slot\ length}$, as defined in clause 8.3.

The interruption of PCell due to activation of SCell shall not be more than the values specified for SA in Clause 8.2.2.2.7.

A.15.2.1.3 SCell Activation and deactivation for SCell in FR2-2 inter-band in non-DRX

A.15.2.1.3.1 Test Purpose and Environment

The purpose of this test case is the same as for the test defined in clause A.15.2.1.1.1 except the PCell and SCell are in FR2-2 inter-band.

The supported test configurations are shown in table A.15.2.1.3.1-1 below. The general test parameters are described in Tables A.15.2.1.3.1-2, and cell specific test parameters are described in Tables A.15.2.1.3.1-3. OTA related test parameters are shown in table A.15.2.1.3.1-4 below.

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 2) becomes configured on NR. During T1 the SCell is powered off and UE is not aware of SCell. A MAC message for activation of SCell is sent by the test equipment 100ms after the RRC message, in a slot # denoted m.

The point in time at which the MAC message for activation of SCell is received at the UE antenna connector defines the start of time period T2. Immediately at beginning of T2 the transmission power of Cell 2 is increased to same level as for cell 2. During T2, the test equipment monitors the L1-RSRP measurement reporting for the SCell. The time when test equipment receives a valid L1-RSRP report is denoted as slot $m+T_{L1\text{-}RSRP}$. In the next DL slot after slot $m+T_{L1\text{-}RSRP}$, the test equipment sends a MAC message for the activation of the TCI state of the RMC CORESET of the SCell. In the same slot, the test equipment also sends an RRC message to configure the CSI-RS resources for SCell.

Time period T3 starts when a MAC message for deactivation of the SCell, sent from the test equipment to the UE in a slot # denoted n, is received at the UE antenna connector.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell and PSCell during activation of SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The test equipment verifies the deactivation time by counting the slots from the time when the SCell1 deactivation command is sent until CSI reporting for SCell1 is discontinued.

Table A.15.2.1.3.1-1: Supported test configurations for FR2-2 SCell activation in FR2-2 inter-band

Configuration	Description
1	NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
2	NR 480 kHz SSB SCS, 400MHz bandwidth, TDD duplex mode
3	NR 960 kHz SSB SCS, 400MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.15.2.1.3.1-2: General test parameters for FR2-2 SCell activation in FR2-2 inter-band

Parameter		Unit	Value	Comment
RF Channel Number			1,2	Two NR radio channels are used for this test. RF channel number 1 is in band 1 and RF channel number 2 is in band 2, where bands 1 and 2 are inter-band CA operating bands in FR2-2 as specified in Table 5.2A.2-1 in TS38.101-2.
Active PCell	Config 1,2,3		Cell 1	Primary cell on NR RF channel number 1.
Configured deactivated SCell	Config 1,2,3		Cell 2	Configured deactivated secondary cell on NR RF channel number 2.
CP length	Config 1,2,3		Normal	
DRX	Config 1,2,3		OFF	Continuous monitoring of primary cell

CQI/PMI periodicity and offset configuration index	Config 1,2,3		0	CQI reporting for SCell every second subframe
Cell-individual offset for cells on NR channel number	Config 1,2,3	dB	0	Individual offset for cells on primary component carrier.
SCell measurement cycle (measCycleSCell)	Config 1,2,3	ms	160	
Cell2 timing offset to cell1	Config 1,2,3	µs	≤8	A random value from 0µs to 8µs
T1	Config 1,2,3	s	7	During this time the PCell shall be known and the SCell configured and detected.
T2	Config 1,2,3	s	2	During this time the UE shall activate the SCell.
T3	Config 1,2,3	s	1	During this time the UE shall deactivate the SCell.
T_{HARQ}	Config 1,2,3	ms	k_1×NR slot length	k_1 is a number of slots and is indicated by the PDSCH-to-HARQ-timing-indicator field in the DCI format, if present, or provided by *dl-DataToUL-ACK*, the value of k should be the minimum value defined in TS 38.213 [3] depends on UE's capability
$T_{CSI_Reporting}$	Config 1,2,3	ms	2	the delay uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2]

Table A.15.2.1.3.1-3: Cell specific test parameters for FR2-2 SCell activation in FR2-2 inter-band

Parameter[Note 5]		Unit	T1		T2		T3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1	freq2	freq1	freq2	freq1	freq2
Duplex mode	Config 1,2,3		TDD		TDD		TDD	
TDD configuration	Config 1,2,3		TDDConf.3.1		TDDConf.3.1		TDDConf.3.1	
Downlink initial BWP Configuration	Config 1,2,3		DLBWP.0.1		DLBWP.0.1		DLBWP.0.1	
Downlink dedicated BWP Configuration	Config 1,2,3		DLBWP.1.1		DLBWP.1.1		DLBWP.1.1	
Uplink initial BWP configuration	Config 1,2,3		ULBWP.0.1		ULBWP.0.1		ULBWP.0.1	
Uplink dedicated BWP configuration	Config 1,2,3		ULBWP.1.1		ULBWP.1.1		ULBWP.1.1	
TRS configuration	Config 1,2,3		TRS.2.1 TDD		TRS.2.1 TDD		TRS.2.1 TDD	
TCI state	Config 1,2,3		TCI.State.0		TCI.State.0		TCI.State.0	
$BW_{channel}$	Config 1,2,3	MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
PDSCH Reference measurement channel	Config 1,2,3		SR.3.1 TDD	-	SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Parameters	Config 1,2,3		CR.3.1 TDD	-	CR.3.1 TDD	-	CR.3.1 TDD	-
Dedicated CORESET Parameters	Config 1,2,3		CCR.3.1 TDD	-	CCR.3.1 TDD	-	CCR.3.1 TDD	-
CSI-RS configuration	Config 1,2,3		NA	NA	NA	CSI-RS.3.1 TDD Note 2	NA	CSI-RS.3.1 TDD
CSI reporting periodicity [Note 3]	Config 1,2,3		NA	5	NA	5	NA	5
OCNG Patterns	Config 1,2,3		OP.1					
SSB Configuration	Config 1,2,3		[SSB.x FR2-2]					
SMTC Configuration	Config 1,2,3		SMTC.1					
EPRE ratio of PSS to SSS	Config 1,2,3	dB	0					

EPRE ratio of PBCH_DMRS to SSS			
EPRE ratio of PBCH to PBCH_DMRS			
EPRE ratio of PDCCH_DMRS to SSS			
EPRE ratio of PDCCH to PDCCH_DMRS			
EPRE ratio of PDSCH_DMRS to SSS			
EPRE ratio of PDSCH to PDSCH_DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation conditions	Config 1,2,3		AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: CSI-RS for CSI measurement is (re)configured in the next DL slot after slot m+$T_{L1\text{-}RSRP}$ during T2.
Note 3: L1-RSRP measurement and reporting are configured to the the UE prior to the start of time period T1.

Table A.15.2.1.3.1-4: OTA related test parameters for FR2-2 SCell activation in FR2-2 inter-band

Parameter Note 6		**Unit**	**Cell 1**			**Cell 2**		
			T1	**T2**	**T3**	**T1**	**T2**	**T3**
AoA setup	Config 1,2,3		Setup 3 as specified in clause A.3.15					
			AoA1			**AoA2**		
Assumption for UE beams Note 7	Config 1,2,3		Rough			Rough		
N_{oc} Note1	Config 1,2,3	dBm/15kHz Note4	-92.1			-92.1		
N_{oc} Note1	Config 1	dBm/SCS Note3	-83.1			-83.1		
	Config 2		-83.1			-83.1		
	Config 3		-80.1			-80.1		
$\hat{E}_s / N_{oc}$	Config 1,2,3	dB	0			0		
SS-RSRP Note2	Config 1	dBm/SCS Note4	-83.1			-83.1		
	Config 2		-83.1			-83.1		
	Config 3		-80.1			-80.1		
$\hat{E}_s / I_{ot}$	Config 1,2,3	dB	0			0		
Io Note2	Config 1	dBm/95.04 MHz Note4	-51.10			-51.10		
	Config 2	dBm/380.16 MHz	-51.10			-51.10		
	Config 3	dBm/380.16 MHz	-51.12			-51.12		

Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5:	As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6:	All parameters apply for configuration 1
Note 7:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.

A.15.2.1.3.2 Test Requirements

During T2 the UE shall start sending CSI report for the SCell in the configured slots for CSI reporting after at least one CSI-RS transmission occasion for channel measurement and reporting after slot (m+k). UE shall send the first CSI report for SCell after receiving at least one CSI-RS transmission occasion for channel measurement and reporting after slot (m+k), or in the next available uplink resource for CSI reporting if the slot was subject to interruption. Whether CSI report in a slot was interrupted is checked by monitoring ACK/NACK sent in PCell in the slot.

During T2, the UE shall start sending valid L1-RSRP report for the SCell in the configured slots for CSI reporting after slot (m+$T_{L1\text{-}RSRP}$), where $T_{L1\text{-}RSRP}$ is no larger than 3ms + $T_{FirstSSB_MAX}$ + 23*T_{SMTC_MAX} +12*T_{rs} + $T_{L1\text{-}RSRP,\ measure}$ + $T_{L1\text{-}RSRP,\ report}$ as defined in clause 8.3.2. For this test case, $T_{FirstSSB_MAX}$=T_{SMTC_MAX}=T_{rs}=20ms; $T_{L1\text{-}RSRP,\ measure}$=480ms and $T_{L1\text{-}RSRP,\ report}$=5ms, which allows $T_{L1\text{-}RSRP}$ =1480ms.

During T2, the UE shall start sending CSI reports for the SCell with non-zero CQI index in the configured slots for CSI reporting no later than slot m + $\frac{T_{HARQ}+T_{activtion_time}+T_{CSI_Reporting}}{NR\ slot\ length}$, where

- T_{HARQ} is defined in Table A.14.X.3.3.1-2
- $T_{activation_time}$ = 3ms + $T_{FirstSSB_MAX}$ + 23*T_{SMTC_MAX} + 12*T_{rs} + $T_{L1\text{-}RSRP,\ measure}$ + $T_{L1\text{-}RSRP,\ report}$ + max {(T_{HARQ} + $T_{uncertainty_MAC}$ + 5ms + $T_{FineTiming}$), ($T_{uncertainty_RRC}$ + T_{RRC_delay})}, which allows 1510ms
- $T_{CSI_Reporting}$ = 10ms
- NR slot length is 0.125ms for this test case.

During T2, the interruption of PCell during SCell activation shall not happen outside the slot $m + 1 + \frac{T_{HARQ}}{\text{NR slot length}}$ to $m + 1 + \frac{T_{HARQ}+3ms+T_X}{\text{NR slot length}}$, where T_X =20ms.

During T3, the UE shall stop sending CSI reports for SCell no later than slot n + $\frac{T_{HARQ}+3ms}{NR\ slot\ length}$, as defined in clause 8.3.

During T3, the starting point of interruption of PCell during SCell deactivation shall not happen outside the slot n + $1 + \frac{T_{HARQ}}{NR\ slot\ length}$ to n + $1 + \frac{T_{HARQ}+3ms}{NR\ slot\ length}$ as defined in clause 8.3.

A.15.2.1.4 Direct SCell activation at SCell addition of known SCell in FR2-2

A.15.2.1.4.1 Test Purpose and Environment

The purpose of this test is to verify that the delay and interruption for direct SCell activation delay at SCell addition are within the requirements stated in clause 8.3.4.

The supported test configurations are shown in Table A.15.2.1.4.1-1 below. The general test parameters are given in Table A.15.2.1.4.1-2 and cell-specific test parameters in Table A.15.2.1.4.1-3. OTA related test parameters are shown in Table A.15.2.1.4.1-4.

The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are two FR2-2 carriers and two NR cells. Before the test starts the UE is connected to Cell 1 (PCell) on carrier #1, but is not aware of Cell 2 on NR carrier #2. Cell 1 and Cell 2 have constant signal levels throughout the test. The UE is monitoring the PCell. The UE shall be continuously scheduled in the PCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the Cell 2 is monitored by the UE. During T1, Cell 2 should be detected and measured by the UE such that it meets the condition for known cell defined in clause 8.3.4 for direct SCell activation.

Time period T2 starts when the *RRCReconfiguration* message for the configuration and activation of Cell 2 (the SCell), which is sent from the test equipment, is received at the UE antenna connector in a slot # denoted m. The test equipment shall set the parameter *sCellState* to *activated* for the SCell, which causes Cell 2 to become configured and activated.

Time period T3 starts at ($m + N_{direct}$), at which point UE shall be reporting a valid CQI for both PCell and SCell.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell during the activation of SCell. The test equipment verifies the activation time by counting the slots from the time when the SCell activation message is sent until a CQI report with other than CQI index 0 is received.

Table A.15.2.1.4.1-1: Supported test configurations

Configuration	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	NR 480 kHz SSB SCS, 400MHz bandwidth, TDD duplex mode
3	NR 960 kHz SSB SCS, 400MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.15.2.1.4.1-2: General test parameters

Parameter		Unit	Value	Comment
RF Channel Number			1,2	Two NR radio channels (1,2) in FR2-2 are used for this test
Active PCell	Config 1, 2 ,3		Cell 1	Primary cell on NR RF channel number 1.
Configured and activated SCell	Config 1, 2 ,3		Cell 2	Configured and activated SCell on NR RF channel number 2.
CP length	Config 1, 2 ,3		Normal	
DRX	Config 1, 2 ,3		OFF	Continuous monitoring of primary cell
SCell measurement cycle (measCycleSCell)	Config 1, 2 ,3	ms	160	
T1	Config 1, 2 ,3	s	7	During this time the measurement for Cell 2 is configured, and Cell 2 is detected.
T2	Config 1, 2 ,3	s	N_{direct}	During this time the UE shall configure and activate Cell 2 as SCell.
T3	Config 1, 2 ,3	ms	100	During this time the UE shall report valid CQI for both PCell and SCell.

T_{HARQ}	Config 1, 2 ,3	ms	k_1×NR slot length	k_1 is a number of slots indicated by the PDSCH-to-HARQ_feedback timing indicator field in a corresponding DCI format or provided by *dl-DataToUL-ACK* if the PDSCH-to-HARQ feedback timing field is not present in the DCI format, the value is defined in 38.213 [3]
k	Config 1, 2 ,3	slot	$k_1 + 3 \cdot N_{\text{slot}}^{\text{subframe},\ \mu} + 1$	As specified in clause 4.3 of TS 38.213 [3]

Table A.15.2.1.4.1-3: Cell specific test parameters

Parameter		Unit	Cell 1		Cell 2			
			T1	T2	T3	T1	T2	T3
SSB ARFCN			freq1		freq2			
Duplex mode	Config 1, 2, 3		TDD					
TDD configuration	Config 1, 2, 3		TDDConf.3.1					
$BW_{channel}$	Config 1, 2, 3	MHz	100: $N_{RB,c}$ = 66					
DL initial BWP configuration	Config 1, 2, 3		DLBWP.0.1					
DL dedicated BWP configuration	Config 1, 2, 3		DLBWP.1.1					
UL initial BWP configuration	Config 1, 2, 3		ULBWP.0.1					
UL dedicated BWP configuration	Config 1, 2, 3		ULBWP.1.1					
Timing offset to Cell 1		ms	Not Applicable		0			
PDSCH Reference measurement channel	Config 1, 2, 3		SR.3.1 TDD		SR.3.1 TDD			
RMSI CORESET Reference Channel	Config 1, 2, 3		CR.3.1 TDD		CR.3.1 TDD			
RMC CORESET Reference Channel	Config 1, 2, 3		CCR.3.1 TDD		CCR.3.1 TDD			
TRS configuration	Config 1, 2, 3		TRS.2.1 TDD		TRS.2.1 TDD			
CSI-RS configuration	Config 1, 2, 3		CSI-RS.3.1 TDD		CSI-RS.3.1 TDD			
CSI reporting periodicity	Config 1, 2, 3	ms	5		5			
OCNG Patterns			OP.1					
SMTC configuration			SMTC.1					
SSB configuration	Config 1, 2, 3		[SSB.x FR2-2]		[SSB.x FR2-2]			
EPRE ratio of PSS to SSS		dB	0					
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
Propagation condition		-	AWGN					

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Table A.15.2.1.4.1-4: OTA related test parameters

Parameter[Note 6]		Unit	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Angle of arrival configuration	Config 1, 2, 3		Setup 1 according to A.3.15.1					
Assumption for UE beams[Note 7]	Config 1, 2, 3		Rough			Rough		
N_{oc} [Note1]	Config 1, 2, 3	dBm/15kHz[Note4]	-112			-112		
N_{oc} [Note1]	Config 1	dBm/SCS[Note3]	-102.97			-102.97		
	Config 2		-102.97			-102.97		
	Config 3		-99.97			-99.97		
$\hat{E}_s / N_{oc}$	Config 1, 2, 3	dB	14			14		
SS-RSRP[Note2]	Config 1	dBm/SCS [Note4]	-88.97			-88.97		
	Config 2		-88.97			-88.97		
	Config 3		-85.97			-85.97		
$\hat{E}_s / I_{ot}$	Config 1, 2, 3	dB	14			14		
Io[Note2]	Config 1	dBm/95.04 MHz [Note4]	-59.81			-59.81		
	Config 2	dBm/380.16 MHz	-59.81			-59.81		
	Config 3	dBm/380.16 MHz	-59.83			-59.83		

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6: All parameters apply for configuration 1
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.15.2.1.4.2 Test Requirements

During T2 the UE shall send the first CSI report for SCell in the first available uplink resource after slot (m+k). UE is allowed to postpone CSI report to next available UL resource if an available uplink resource is subject to interruption. Whether CSI report in a slot was interrupted is checked by monitoring ACK/NACK sent in PCell in the slot.

During T2 the UE shall start sending CSI reports for SCell with non-zero CQI index in the configured slots for CSI reporting no later than slot $m + \frac{N_{direct}}{NR\ slot\ length}$, where

$$N_{direct} = T_{RRC_Process} + T_1 + T_{activation_time} + T_{CSI_Reporting} - 3ms,$$

- $T_{RRC_Process}$ = 16ms, which is the RRC procedure delay defined for SCell addition in clause 12 of TS 38.331 [2],

- T_1 is the delay from slot m + $T_{RRC_Process}$ until the transmission of *RRCReconfigurationComplete* message,

- $T_{activation_time} = T_{FirstSSB}$+ 5ms = 25ms,

- $T_{CSI_Reporting}$ = 10ms

This gives a total of N_{direct} = 16 + T_1 + 25 + 10 - 3 = (48 + T_1) ms, and NR slot length is 0.125ms.

During T3 the UE shall send CSI reports for SCell with non-zero CQI index and continue to send CSI reports for SCell with non-zero CQI index until the end of T3.

During T2 interruption of PSCell during SCell activation shall not happen outside the window from slot *m*+1 to slot $m+1+\frac{T_{RRC_Process}+T_1+T_X}{NR\ slot\ length}$ as defined in clause 8.3.4, where T_X =20ms.

The interruption of PCell due to activation of SCell shall not be more than the values specified for NR SA in clause 8.2.2.2.11.

All of the above test requirements shall be fulfilled in order for the observed SCell activation delay to be counted as correct. The rate of correct observed SCell activation delay and SCell deactivation delay during repeated tests shall be at least 90%.

NOTE: During T2 if there are no uplink resources for reporting the valid CSI in a slot m + $\frac{N_{direct}}{NR\ slot\ length}$ as defined in clause 8.3.4 then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

A.15.2.1.5 Direct SCell activation at handover with known SCell in FR2-2

A.15.2.1.5.1 Test Purpose and Environment

This test is to verify the requirements specified in sub clause 8.3.5 for the FR2-2 handover with direct SCell activation.

The test scenario comprises of three FR2-2 cells, one source PCell (Cell 1), one target PCell (Cell 2) and one SCell (Cell 3). The test consists of three successive time periods, with time durations of T1, T2, and T3 respectively.

At the start of time duration T1, the UE is in connected mode with PCell (Cell 1). Both Cell 2 and Cell 3 are known to UE and UE is reporting CQI for all Cell 1.

Time period T2 starts when UE receives a handover command that initiate handover of UE to Cell2 and also activates Cell 3. This is done using an *RRCConnectionReconfiguration* message with parameter *sCellState* set to *activated* for the Cell 3. The message is sent from the test equipment to the UE and is received in a slot number n at the UE antenna connector. The UE shall accomplish the handover, addition and activation of the SCell no later than slot (n +$\frac{N_{direct}}{NR\ slot\ length}$).

Time period T3 starts at (n +$\frac{N_{direct}}{NR\ slot\ length}$), at which point UE shall be reporting a valid CSI for both Cell 2 and Cell 3 as given in tables A.15.2.1.5.1-1 and A.15.2.1.5.1-2.

Table A.15.2.1.5.1-1: Supported test configurations for FR2-2 handover with direct SCell activation case

Configuration	Description
1	SCell: NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode Source cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

2	SCell: NR 480 kHz SSB SCS, 400MHz bandwidth, TDD duplex mode Source cell: NR 480 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode Target cell: NR 480 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
3	SCell: NR 960 kHz SSB SCS, 400MHz bandwidth, TDD duplex mode Source cell: NR 960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode Target cell: NR 960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.15.2.1.5.1-2: General test parameters for FR2-2 handover with direct SCell activation case

Parameter			Unit	Value	Comment
RF Channel Number		Config 1,2,3		1, 2, 3	Three NR radio channels are used for this test, Cell 1, Cell2 and Cell 3 use RF channel 1, 2 and 3 respectively.
A4-Offset		Config 1,2,3	dBm	-120	
Time offset between cells		Config 1,2,3		3 μs	Synchronous cells
Initial conditions	Source cell	Config 1,2,3		Cell 1	Source Cell
	Target cell			Cell 2	Neighbour cell
	SCell			Cell 3	SCell is not added and activated
Final condition	Source cell	Config 1,2,3		Cell 2	Cell 2 is Source cell after handover
	Neighbour cell			Cell 1	Neighbour cell
	SCell			Cell 3	SCell is added and activated

Table A.15.2.1.5.1-3: Cell specific test parameters for FR2-2 SCell activation case

Parameter[Note 5]		Unit	T1			T2			T3		
			Cell 1	Cell 2	Cell 3	Cell 1	Cell 2	Cell 3	Cell 1	Cell 2	Cell 3
SSB ARFCN	Config 1,2,3		freq1	freq2	freq 3	freq1	freq2	freq 3	freq1	freq2	freq3
Duplex mode	Config 1,2,3		TDD			TDD			TDD		
TDD configuration	Config 1,2,3		TDDConf.3.1			TDDConf.3.1			TDDConf.3.1		
Downlink initial BWP Configuration	Config 1,2,3		DLBWP.0.1			DLBWP.0.1			DLBWP.0.1		
Downlink dedicated BWP Configuration	Config 1,2,3		DLBWP.1.1			DLBWP.1.1			DLBWP.1.1		
Uplink initial BWP configuration	Config 1,2,3		ULBWP.0.1			ULBWP.0.1			ULBWP.0.1		
Uplink dedicated BWP configuration	Config 1,2,3		ULBWP.1.1			ULBWP.1.1			ULBWP.1.1		
TRS configuration	Config 1,2,3		TRS.2.1 TDD			TRS.2.1 TDD			TRS.2.1 TDD		
TCI state	Config 1,2,3		TCI.State.0			TCI.State.0			TCI.State.0		
$BW_{channel}$	Config 1,2,3	MHz	100: $N_{RB,c}$ = 66			100: $N_{RB,c}$ = 66			100: $N_{RB,c}$ = 66		
PDSCH Reference measurement channel	Config 1,2,3		SR.3.1 TDD		-	SR.3.1 TDD		-	SR.3.1 TDD		
RMSI CORESET Parameters	Config 1,2,3		CR.3.1 TDD		-	CR.3.1 TDD		-	CR.3.1 TDD		
Dedicated CORESET Parameters	Config 1,2,3		CCR.3.1 TDD		-	CCR.3.1 TDD		-	CCR.3.1 TDD		

OCNG Patterns	Config 1,2,3		OP.1
SSB Configuration	Config 1,2,3		[SSB.xFR2-2]
SMTC Configuration	Config 1,2,3		SMTC.1
PRACH configuration	Config 1,2,3		FR2-2 PRACH configuration 1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH_DMRS to SSS			
EPRE ratio of PBCH to PBCH_DMRS			
EPRE ratio of PDCCH_DMRS to SSS			
EPRE ratio of PDCCH to PDCCH_DMRS			
EPRE ratio of PDSCH_DMRS to SSS			
EPRE ratio of PDSCH to PDSCH_DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation conditions			AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: Void

Table A.15.2.1.5.1-4: OTA related test parameters for FR2-2 SCell activation case

Parameter Note 6		Unit	Cell 1			Cell 2			Cell 3		
			T1	T2	T3	T1	T2	T3	T1	T2	T3
Angle of arrival configuration	Config 1,2,3		Setup 1 according to table A.3.15.1			Setup 1 according to table A.3.15.1			Setup 1 according to table A.3.15.1		
Assumption for UE beams Note 7	Config 1,2,3		Rough			Rough			Rough		
N_{oc} Note1	Config 1,2,3	dBm/15kHz Note4	-112			-112			-112		
N_{oc} Note1	Config 1	dBm/SCS Note 3	-102.97			-102.97			-102.97		
	Config 2		*-102.97*			*-102.97*			*-102.97*		
	Config 3		-99.97			-99.97			-99.97		
$\hat{E}_s / N_{oc}$	Config 1,2,3	dB	14			14			14		
SS-RSRP Note2	Config 1	dBm/SCS Note4	-88.97			-88.97			-88.97		
	Config 2		-88.97			-88.97			-88.97		
	Config 3		-85.97			-85.97			-85.97		

$\hat{E}_s/I_{ot}$	Config 1,2,3	dB	14	14	14
Io Note2	Config 1	dBm/95.04 MHz Note4	-59.81	-59.81	-59.81
	Config 2		-59.81	-59.81	-59.81
	Config 3		-59.84	-59.84	-59.84

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6: Void
Note 7: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.

A.15.2.1.5.2 Test Requirements

The UE shall be capable to transmit valid CSI report for PCell (Cell 2) and to the directly activated SCell1 no later than in slot n+ N_{direct}.

The SCell activation delay, N_{direct}, can be expressed as: $N_{direct} = T_{RRC_process} + T_{interrupt} + T_2 + T_3 + T_{activation_time} + T_{CSI_Reporting}$ - 3ms; Where:

- $T_{RRC_Process}$: RRC procedure delay defined in clause 12 of TS 38.331 and it is equal to 16ms,
- $T_{interrupt}$: Interruption time during handover as specified in clause 6.1.1. The value to be verified in the test is 52 ms ($T_{interrupt}$ = 0 ms for T_{search} + 10ms for T_{IU} + 20 ms for $T_{processing}$ + 20ms for T_{Δ} + 2 ms for T_{margin} ms) by assuming known SCell and SMTC.1 configuration.
- T_2: Delay from slot $n + \frac{T_{RRC_Process}+T_{interrupt}}{\text{NR slot length}}$ until UE has obtained a valid TA command for the target PCell,
- T_3: Delay for applying the received TA for uplink transmission in the target PCell, and greater than or equal to k+1 slot, where k is defined in clause 4.2 in TS 38.213,
- $T_{activation_time}$ and $T_{CSI_Reporting}$ are specified in clause 8.3.2, where the following definitions of $T_{FirstSSB}$ and $T_{FirstSSB_MAX}$ as defined in section 8.3.5 shall apply:

During time period T2 of the test, the UE shall start sending CSI reports for SCell with non-zero CQI index at latest in a slot $n + \frac{T_{HARQ}+T_{activtion_time}+T_{CSI_Reporting}}{NR\ slot\ length}$, $T_{activation_time} = T_{SMTC_SCell}$ + 5ms, as defined in clause 8.3.

During time period T3 of the test, the UE shall stop sending CSI reports for SCell at latest in a slot $m + \frac{T_{HARQ}+3ms}{NR\ slot\ length}$, as defined in clause 8.3.

During time period T2 of the test, interruption of PCell / PSCell during SCell activation shall not happen outside the slot $n + 1 + \frac{T_{HARQ}}{\text{NR slot length}}$ to $n + 1 + \frac{T_{HARQ}+3ms+T_X}{\text{NR slot length}} + N_{interruption}$, as defined in clause 8.3.

During time period T3 of the test, the starting point of interruption of PCell during SCell deactivation shall not happen outside the slot $m + 1 + \frac{T_{HARQ}}{NR\ slot\ length}$ to $m + 1 + \frac{T_{HARQ}+3ms}{NR\ slot\ length}$, as defined in clause 8.3.

The interruption on any activated serving cell shall not be more than the values specified for SA in clause 8.2.2.2.2.

All of the above test requirements shall be fulfilled in order for the observed SCell activation delay and SCell deactivation delay to be counted as correct. The rate of correct observed SCell activation delay and SCell deactivation delay during repeated tests shall be at least 90%.

NOTE: During time period T2 of the test, if there are no uplink resources for reporting the valid CSI in a slot $\frac{T_{HARQ}+T_{activtion_time}+T_{CSI_Reporting}}{NR\ slot\ length}$ as defined in clause 8.3 then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

A.15.3 RRC_CONNECTED state mobility

A.15.3.1 Handover

A.15.3.1.1 Intra-frequency handover from FR2-2 carrier with CCA to FR2-2 carrier with CCA; unknown target cell

A.15.3.1.1.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR2-2-NR FR2-2 intra frequency handover on carrier with CCA requirements specified in clause 6.1.1.4.

A.15.3.1.1.2 Test Parameters

Supported test configurations are shown in table A.15.3.1.1.2-1. Both handover delay and interruption length are tested by using the parameters in table A.15.3.1.1.2-2, and A.15.3.1.1.2-3.

The test scenario comprises of 1 carrier and two cell on the carrier. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE receives a RRC handover command from the network. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

Table A.15.3.1.1.2-1: Intra-frequency handover from FR2-2 carrier with CCA to FR2-2 carrier with CCA test configurations

Configuration	Description
1	NR TDD, SSB SCS 120 kHz, data SCS 120 kHz, BW 100 MHz
2	NR TDD, SSB SCS 480 kHz, data SCS 480 kHz, BW 400 MHz
3	NR TDD, SSB SCS 960 kHz, data SCS 960 kHz, BW 400 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.15.3.1.1.2-2: General test parameters for Intra-frequency handover from FR2-2 carrier with CCA to FR2-2 carrier with CCA

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	On the carrier under CCA
	Neighbouring cell		Cell 2	On the carrier under CCA
Final condition	Active cell		Cell 2	On the carrier under CCA
A4-Offset		dBm	-120	
DL CCA model			A.3.26.2.1	
UL CCA model			A.3.26.2.2	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used

Access Barring Information	-	Not Sent	No additional delays in random access procedure.
Time offset between cells		3 μs	Synchronous cells
T1	s	5	
T2	s	≤10	

Table A.15.3.1.1.2-3: Cell specific test parameters for Intra-frequency handover from FR2-2 carrier with CCA to FR2-2 carrier with CCA

Parameter		Unit	Config	Cell 1		Cell 2	
				T1	T2	T1	T2
Assumption for UE beams[Note 6]			1,2,3	Rough		Rough	
AoA setup			1,2,3	Setup 1 as defined in A.3.15			
NR RF Channel Number			1,2,3	1		1	
P_{CCA_DL}			1,2,3	0.93		0.93	
P_{CCA_UL}			1,2,3	1		1	
Duplex mode			1,2,3	TDD			
TDD configuration			1	TBD			
			2	TBD			
			3	TBD			
$BW_{channel}$		MHz	1	100: $N_{RB,c}$ = 66			
			2	400: $N_{RB,c}$ = 66			
			3	400: $N_{RB,c}$ = 33			
Data RBs allocated			1	66			
			2	66			
			3	33			
DRx Cycle		ms	1,2,3	Not Applicable			
PDSCH Reference measurement channel			1	SR3.1 TDD			
			2	TBD			
			3	TBD			
RMSI CORESET Reference Channel			1	CR3.1 TDD			
			2	TBD			
			3	TBD			
Control Channel RMC			1	CCR.3.1 TDD			
			2	TBD			
			3	TBD			
OCNG Patterns			1,2,3	O P. 1			
SMTC Configuration			1,2,3	SMTC pattern 1			
SSB Configuration			1	SSB. 3 FR2			
			2	TBD			
			3	TBD			
PDSCH/PDCCH subcarrier spacing		kHz	1	120			
			2	480			
			3	960			
PUCCH/PUSCH subcarrier spacing		kHz	1	120			
			2	480			
			3	960			
PRACH configuration			1,2,3	FR2 PRACH configuration 1			
TRS configuration			1	TRS.2.1 TDD			
			2	TBD			
			3	TBD			
PDSCH/PDCCH TCI state			1,2,3	TCI.State.2			
BWP configuraiton	Initial DL BWP		1,2,3	DLBWP.0.1			
	Dedicated DL BWP		1,2,3	DLBWP.1.1			
	Initial UL BWP		1,2,3	ULBWP.0.1			
	Dedicated UL BWP		1,2,3	ULBWP.1.1			
EPRE ratio of PSS to SSS		dB		0		0	
EPRE ratio of PBCH DMRS to SSS							

EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15kHz		-104.7			
N_{oc} Note2	dBm/SCS	1	-95.7			
		2	-89.7			
		3	-86.7			
$\hat{E}_s / I_{ot}$	dB		6	-1.8	-Infinity	0
$\hat{E}_s / N_{oc}$	dB		6	6	-Infinity	7
Io Note3	dBm/95.04 MHz Note4		-59.7	-56.7	-59.7	-56.7
	dBm/380.16 MHz Note4		-53.7	-50.7	-53.7	-50.7
Propagation condition	-		AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.15.3.1.1.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than RRC procedure delay + $T_{interrupt}$ from the beginning of time period T2.
The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2].

$T_{interrupt}$ is defined in clause 6.1B.1.3.2.

A.15.3.1.2 Inter-frequency handover from FR1 to FR2-2 carrier with CCA; unknown target cell

A.15.3.1.2.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR1-NR FR2-2 carrier with CCA Inter frequency handover requirements specified in clause 6.1.1.4.

A.15.3.1.2.2 Test Parameters

Supported test configurations are shown in table A.15.3.1.2.2-1. Both handover delay and interruption length are tested by using the parameters in table A.15.3.1.2.2-2, and A.15.3.1.2.2-3.

The test scenario comprises of 2 carriers and one cell on each carrier. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE receives a RRC handover command from the network. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

Table A.15.3.1.2.2-1: Inter-frequency handover from FR1 to FR2-2 carrier with CCA test configurations

Configuration	Description	
1	NR TDD, SSB SCS 120 kHz, data SCS 120 kHz, BW 100 MHz	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR TDD, SSB SCS 480 kHz, data SCS 480 kHz, BW 400 MHz	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR TDD, SSB SCS 960 kHz, data SCS 960 kHz, BW 400 MHz	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations		

Table A.15.3.1.2.2-2: General test parameters Inter-frequency handover from FR1 to FR2-2 carrier with CCA

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	On carrier with CCA
Final condition	Active cell		Cell 2	On carrier with CCA
A4-Offset		dBm	-120	
DL CCA model			A.3.26.2.1	
UL CCA model			A.3.26.2.2	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	≤10	

Table A.15.3.1.2.2-3: Cell specific test parameters for NR FR1-FR2-2 carrier with CCA Inter frequency handover test case

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
Assumption for UE beams[Note 6]		1,2,3	-		Rough	

AoA setup			1,2,3	-	Setup 1 as defined in A.3.15
NR RF Channel Number			1,2,3	1	2
P_{CCA_DL}			1,2,3	-	0.93
P_{CCA_UL}			1,2,3	-	1
Duplex mode			1	FDD	TDD
			2,3	TDD	TDD
TDD configuration			1	-	TBD
			2	TDDConf.1.1	TBD
			3	TDDConf.2.1	TBD
$BW_{channel}$		MHz	1	10: $N_{RB,c}$ = 52	100: $N_{RB,c}$ = 66
			2	10: $N_{RB,c}$ = 52	400: $N_{RB,c}$ = 66
			3	40: $N_{RB,c}$ = 106	400: $N_{RB,c}$ = 33
Data RBs allocated			1	52	66
			2	52	66
			3	106	33
DRx Cycle		ms	1,2,3	Not Applicable	Not Applicable
PDSCH Reference measurement channel			1	SR.1.1 FDD	SR3.1 TDD
			2	SR.1.1 TDD	TBD
			3	SR2.1 TDD	TBD
RMSI CORESET Reference Channel			1	CR.1.1 FDD	CR3.1 TDD
			2	CR.1.1 TDD	TBD
			3	CR2.1 TDD	TBD
Control Channel RMC			1	CCR.1.1 FDD	CCR.3.1 TDD
			2	CCR.1.1 TDD	TBD
			3	CCR.2.1 TDD	TBD
OCNG Patterns			1,2,3	O P. 1	O P. 1
SMTC Configuration			1	SMTC.1	SMTC pattern 1
			2,3	SMTC.2	SMTC pattern 1
SSB Configuration			1	SSB.1 FR1	SSB. 3 FR2
			2	SSB.2 FR1	TBD
			3	SSB.2 FR1	TBD
PDSCH/PDCCH subcarrier spacing		kHz	1	15	120
			2	30	480
			3	30	960
PUCCH/PUSCH subcarrier spacing		kHz	1	15	120
			2	30	480
			3	30	960
PRACH configuration			1,2,3	FR1 PRACH configuration 1	FR2 PRACH configuration 1
TRS configuration			1	TRS.1.1 FDD	TRS.2.1 TDD
			2	TRS.1.1 TDD	TBD
			3	TRS.1.2 TDD	TBD
PDSCH/PDCCH TCI state			1,2,3	-	TCI.State.2
BWP configuraiton	Initial DL BWP		1,2,3	DLBWP.0.1	DLBWP.0.1
	Dedicated DL BWP		1,2,3	LBWP.1.1	DLBWP.1.1
	Initial UL BWP		1,2,3	ULBWP.0.1	ULBWP.0.1
	Dedicated UL BWP		1,2,3	ULBWP.1.1	ULBWP.1.1
EPRE ratio of PSS to SSS		dB		0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					

EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} Note2	dBm/15kHz		Link only, see clause A.3.7A	-104.7	
N_{oc} Note2	dBm/SCS	1		-95.7	
		2		-89.7	
		3		-86.7	
$\hat{E}_s / I_{ot}$	dB			-Infinity	7
$\hat{E}_s / N_{oc}$	dB			-Infinity	7
Io Note3	dBm/95.04 MHz Note4			-58.9	-58.9
	dBm/380.16 MHz Note4			-52.9	-52.9
Propagation condition	-			AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.15.3.1.2.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than RRC procedure delay + $T_{interrupt}$ from the beginning of time period T2.
The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2].

$T_{interrupt}$ is defined in clause 6.1B.1.4.2.

A.15.4 Measurement procedure

A.15.4.1 Intra-frequency Measurements

A.15.4.1.1 SA event triggered reporting test without gap under non-DRX for FR2-2 with CCA

A.15.4.1.1.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2A.5.1 and 9.2A.5.2. Supported test configurations are shown in table A.15.4.1.1.1-1.

Table A.15.4.1.1.1-1: supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	480 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
3	960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are two cells in the test, PCell (Cell 1) and a FR2-2 neighbour cell (Cell 2) on the same frequency as the PCell with CCA transmitting SSBs according to DL CCA model. The test parameters for the Cell 1 and Cell 2 are given in Table A.15.4.1.1.1-2, A.15.4.1.1.1-3 and A.15.4.1.1.1-4 below.

In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

Table A.15.4.1.1.1-2: General test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2-2 without gap without DRX

Parameter	Unit	Config	Value	Comment
Active cell		1,2,3	PCell (Cell 1)	
Neighbour cell		1,2,3	Cell 2	Cell to be identified.
RF Channel Number		1,2,3	1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
SMTC configuration		1,2,3	SMTC.1	
A3-Offset	dB	1,2,3	-11	
CP length		1,2,3	Normal	
Hysteresis	dB	1,2,3	0	
Time To Trigger	s	1,2,3	0	
Filter coefficient		1,2,3	0	L3 filtering is not used
DRX		1,2,3	OFF	
Time offset between Cell 1 and Cell 2		1,2,3	3 μs	Synchronous cells
T1	s	1,2,3	5	
T2	s	1,2,3	5	

Table A.15.4.1.1.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2-2 without gap without DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1,2,3	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
		2	400: $N_{RB,c}$ = 66		400: $N_{RB,c}$ = 66	
		3	400: $N_{RB,c}$ = 33		400: $N_{RB,c}$ = 33	
DL CCA model		1,2,3	As specified in clause TBD		As specified in clause TBD	
DL CCA probability		1,2,3	TBD		TBD	
Data RBs allocated		1	66		66	
		2	66		66	
		3	33		33	

Intial BWP configuration		1,2,3	DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Active DL BWP configuration		1,2,3	DLBWP.1.1	DLBWP.1.1
Active UL BWP configuration		1,2,3	ULBWP.1.1	ULBWP.1.1
RLM-RS		1,2,3	SSB	SSB
PDSCH RMC configuration		1	SR.3.2 TDD	N/A
		2,3	SR.3.3 TDD	
RMSI CORESET RMC configuration		1	CR.3.1 TDD	N/A
		2,3	CR.3.2 TDD	N/A
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD	N/A
		2,3	CCR.3.7 TDD	N/A
TRS configuration		1,2,3	TRS.2.1 TDD	N/A
PDSCH/PDCCH TCI states		1,2,3	TCI.State.2	N/A
PDSCH/PDCCH subcarrier spacing	kHz	1,2,3	120	120
OCNG Patterns		1,2,3	OP.5	N/A
cellIndividualOffset	dB	1,2,3	N/A	16
SSB		1	SSB.1 FR2	SSB.7 FR2
		2	SSB.9 FR2	SSB.15 FR2
		3	SSB.10 FR2	SSB.16 FR2
Propagation Condition		1, 2,3	AWGN	AWGN

Table A.15.4.1.1.1-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2-2 without gap without DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1,2,3	Setup 3 defined in A.3.15.3			
			AoA1		AoA2	
Beam assumption[Note 4]		1,2,3	Rough		Rough	
E_s	dBm/SCS	1	-89	-89	-Infinity	-89
		2	-83	-83	-Infinity	-83
		3	-80	-80	-Infinity	-80
$\hat{E}_s / I_{ot}$ [BB Note 5]	dB	1, 2,3	-0.12	-0.12	-Infinity	-0.12
SSB_RP	dBm/SCS	1	-89	-89	-Infinity	-89
		2	-83	-83	-Infinity	-83
		3	-80	-80	-Infinity	-80
Io	dBm/95.04MHz	1,2,3	-61.41	-61.41	-Infinity	-61.41
Time multiplexing of the downlink transmissions from each AoA		1, 2,3	Defined in Figure A.7.6.1.1.1-1			

Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2:	Void
Note 3:	Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 5:	Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

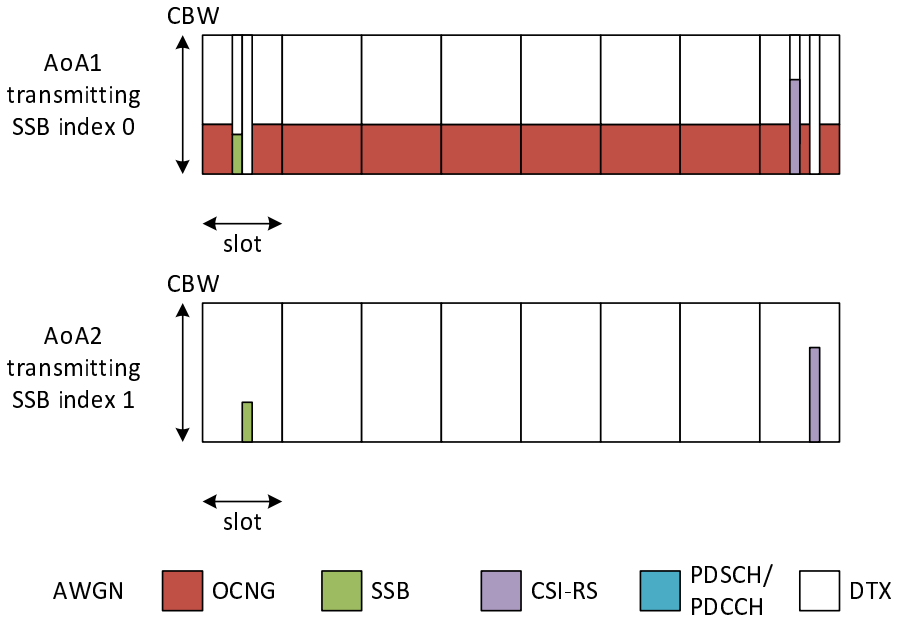

Figure A.15.4.1.1.1-1: Time multiplexed downlink transmissions (Config 1 example)

A.15.4.1.1.2 Test Requirements

In the test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

For Configuration 1,

- TBD for a UE supporting power class 1,
- TBD for a UE supporting power class 2 and 3

For Configuration 2,

- TBD for a UE supporting power class 1,
- TBD for a UE supporting power class 2 and 3

For Configuration 3,

- TBD for a UE supporting power class 1,

- TBD for a UE supporting power class 2 and 3

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.15.4.2 Inter-frequency Measurements

A.15.4.2.1 SA event triggered reporting tests for FR2-2 with CCA without SSB time index detection when DRX is not used (PCell in FR2-2)

A.15.4.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3A.4.

In this test, there are two cells: NR cell 1 as PCell in FR2-2 on NR RF channel 1 and NR cell 2 as neighbour cell in FR2-2 on NR RF channel 2 with CCA transmitting SSBs according to DL CCA model. The test parameters and configurations are given in Tables A.15.4.2.1.1-1, A.15.4.2.1.1-2, and A.15.4.2.1.1-3.

Measurement gap pattern configuration # 13 as defined in Table A.15.4.2.1.1-2 is provided for UE that does not support per-FR gap and for UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Supported test configurations are shown in table A.15.4.2.1.1-1.

Table A.15.4.2.1.1-1 SA event triggered reporting tests without SSB index reading for FR2-FR2

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	480 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
3	960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.15.4.2.1.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2-2 without SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2,3	1	Two FR2-2 NR carrier frequencies is used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cell 2	NR cell 2 is on NR RF channel number 2.

Gap Pattern Id		Config 1,2,3	13	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	39	
SMTC-SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
		Config 2	SSB.11 FR2	
		Config 3	SSB.12 FR2	
offsetMO	dB	Config 1,2,3	16	Applied to NR Cell 2 measurement object
A3-Offset	dB	Config 1,2,3	-11	
Hysteresis	dB	Config 1,2,3	0	
CP length		Config 1,2,3	Normal	
TimeToTrigger	s	Config 1,2,3	0	
Filter coefficient		Config 1,2,3	0	L3 filtering is not used
DRX		Config 1,2,3	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1,2,3	3μs	Synchronous cells.
T1	s	Config 1,2,3	5	
T2	s	Config 1,2,3	5.2 for PC1; 3.5 for other PC	

Table A.15.4.2.1.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2-2 without SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1,2,3	Setup 3 as specified in clause A.3.15			
				AoA1		AoA2	
Beam Assumption[Note 7]			1,2,3	Rough		Rough	
NR RF Channel Number			Config 1,2,3	1		2	
Duplex mode			Config 1,2,3	TDD		TDD	
TDD configuration			Config 1,2,3	TDDConf.3.1		TDDConf.3.1	
DL CCA model			Config 1,2,3	As specified in clause TBD		As specified in clause TBD	
DL CCA probability			Config 1,2,3	TBD		TBD	
$BW_{channel}$		MHz	Config 1	100: $N_{RB,c} = 66$		100: $N_{RB,c} = 66$	
			Config 2	400: $N_{RB,c} = 66$		400: $N_{RB,c} = 66$	
			Config 3	400: $N_{RB,c} = 33$		400: $N_{RB,c} = 33$	
Data RBs allocated			Config 1	66		66	
			Config 2	66		66	
			Config 3	33		33	
BWP BW		MHz	Config 1	100: $N_{RB,c} = 66$		100: $N_{RB,c} = 66$	
			Config 2	400: $N_{RB,c} = 66$		400: $N_{RB,c} = 66$	
			Config 3	400: $N_{RB,c} = 33$		400: $N_{RB,c} = 33$	
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	

OCNG Patterns defined in A.3.2.1.1 (OP.1)		Config 1,2,3	OP.1		OP.1	
PDSCH Reference measurement channel		Config 1,2,3	SR.3.1 TDD		-	
CORESET Reference Channel		Config 1,2,3	CR.3.1 TDD		-	
SMTC configuration defined in A.3.11.1 and A.3.11.2		Config 1,2,3	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2,3	120		120	
TRS configuration		Config 1,2,3	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI state		Config 1,2,3	TCI.State.2		N/A	
EPRE ratio of PSS to SSS		Config 1,2,3	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
$\hat{E}_s$	dBm/SCS	Config 1	-87	-87	-Infinity	-87
		Config 2	-81	-81	-Infinity	-81
		Config 3	-78	-78	-Infinity	-78
SSBRP Note 3	dBm/SCS Note5	Config 1	-87	-87	-Infinity	-87
		Config 2	-81	-81	-Infinity	-81
		Config 3	-78	-78	-Infinity	-78
$\hat{E}_s / I_{ot}$ BB Note 8	dB	Config 1,2,3	1.89	1.89	-Infinity	1.89
Io Note3	dBm/95.04 MHz Note5	Config 1,2,3	-58.01	-58.01	-Infinity	-58.01
Propagation Condition		Config 1,2,3	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: VoidNote 3: SSBRP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Void

Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone

Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone

Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Note 8: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.

A.15.4.2.1.2 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

For Configuration 1,

TBD for UE supporting power class 1, or

TBD for UE supporting other power class.

For Configuration 2,

TBD for UE supporting power class 1, or

TBD for UE supporting other power class.

For Configuration 3,

TBD for UE supporting power class 1, or

TBD for UE supporting other power class.

The UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16 NR standalone tests with all NR cells in FR1 for RedCap

A.16.1 SA: RRC_IDLE state mobility for RedCap

A.16.1.1 Cell re-selection to NR

A.16.1.1.1 Cell reselection to FR1 intra-frequency NR case for 1 Rx UE

A.16.1.1.1.1 Test Purpose and Environment

This test is to verify the requirement for the intra frequency NR cell reselection requirements specified in clause 4.2B.2.3.

A.16.1.1.1.2 Test Parameters

The test scenario comprises of 1 NR carrier and 2 cells as given in tables A.16.1.1.1.2-1, A.16.1.1.1.2-2 and A.16.1.1.1.2-3. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Only cell 1 is already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2.

Table A.16.1.1.1.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode

2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.16.1.1.1.2-2: General test parameters for intra frequency NR cell re-selection test case for 1 Rx UE

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4	Cell1	
T2 end condition	Active cell		1, 2, 3, 4	Cell2	
	Neighbour cells		1, 2, 3, 4	Cell1	
Final condition	Active cell		1, 2, 3, 4	Cell1	
	Neighbour cells		1, 2, 3, 4	Cell2	
RF Channel Number			1, 2, 3, 4	1	
Time offset between cells			1, 4	3 ms	Asynchronous cells
			2	3 µs	Synchronous cells
			3	3 µs	Synchronous cells
Access Barring Information		-	1, 2, 3, 4	Not Sent	No additional delays in random access procedure.
SSB configuration			1, 4	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.1 RedCap FR1	
SMTC configuration			1, 4	SMTC.2	Configured in SIB2 of Cell 1
				SMTC.6	Configured in SIB2 of Cell 2
			2	SMTC.1	
			3	SMTC.1	
DRX cycle length		s	1, 2, 3, 4	1.28	The value shall be used for all cells in the test.
PRACH configuration index			1, 2, 3, 4	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2, 3, 4	Not configured	
T1		s	1, 2, 3, 4	>7	During T1, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed, The intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T2
T2		s	1, 2, 3, 4	[40]	T2 needs to be defined so that cell re-selection reaction time is taken into account.
T3		s	1, 2, 3, 4	15	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.16.1.1.1.2-3: Cell specific test parameters for intra frequency NR cell re-selection test case in AWGN for 1 Rx UE

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3

TDD configuration		1, 4	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
PDSCH RMC configuration		1, 4	SR.1.1 FDD			SR.1.1 FDD		
		2	SR.1.1 TDD			SR.1.1 TDD		
		3	SR.2.1 TDD			SR.2.1 TDD		
RMSI CORESET RMC configuration		1, , 4	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD			CCR.1.1 FDD		
		2	CCR.1.1 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
OCNG Pattern		1, 2, 3, 4	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1, 2, 3, 4	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3, 4	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2, 3, 4	SSB			SSB		
Qrxlevmin	dBm/SCS	1, 2, 4	-130			-130		
		3	-127			-127		
Pcompensation	dB	1, 2, 3, 4	0			0		
$Qhyst_s$	dB	1, 2, 3, 4	0			0		
$Qoffset_{s,n}$	dB	1, 2, 3, 4	0			0		
Cell_selection_and_reselection_quality_measurement		1, 2, 3, 4	SS-RSRP			SS-RSRP		
$\hat{E}_s / I_{ot}$	dB	1, , 4	16	-3.11	2.79	-infinity	2.79	-3.11
		2						
		3						
N_{oc} Note2	dBm/SCS	1, 4	-98					
		2	-98					
		3	-95					
N_{oc} Note2	dBm/15 kHz	1, 4	-98					
		2						
		3						
$\hat{E}_s / N_{oc}$	dB	1, 4	16	13	16	-infinity	16	13
		2						
		3						
SS-RSRP Note3	dBm/SCS	1, 4	-82	-85	-82	-infinity	-82	-85
		2	-82	-85	-82	-infinity	-82	-85
		3	-79	-82	-79	-infinity	-79	-82
Io	dBm/9.36 MHz	1, 4	-53.94	-52.21	-52.21	Same as parameters specified in Cell 1 columns-		
	dBm/9.36 MHz	2	-53.94	-52.21	-52.21			
	dBm/18.36 MHz	3	-51.02	-49.30	-49.30			
Treselection	s	1, 2, 3, 4	0	0	0	0	0	0
SintrasearchP	dB	1, 2, 3, 4	60			60		
Propagation Condition		1, 2, 3, 4	AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.16.1.1.1.3 Test Requirements

The cell reselection delay to a newly detectable cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on Cell 2.

The cell re-selection delay to a newly detectable cell shall be less than 34 s.

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on cell 1.

The cell re-selection delay to an already detected cell shall be less than 8 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a newly detectable cell can be expressed as: $T_{detect,NR_Intra_RedCap} + T_{SI-NR}$, and to an already detected cell can be expressed as: $T_{evaluate,NR_Intra_RedCap} + T_{SI-NR}$,

Where:

$T_{detect,NR_Intra_RedCap}$See Table 4.2B.2.3-1 in clause 4.2B.2.3

$T_{evaluate,NR_Intra_RedCap}$ See Table 4.2B.2.3-1 in clause 4.2B.2.3

T_{SI-NR} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280ms is assumed in this test case.

This gives a total of 33.28 s, allow 34 s for the cell re-selection delay to a newly detectable cell and 7.68 s for the cell re-selection delay to an already detected cell in the test case, which we allow 8 s.

A.16.1.1.2 Cell reselection to FR1 intra-frequency NR case for 2 Rx UE

A.16.1.1.2.1 Test Purpose and Environment

This test is to verify the requirement for the intra frequency NR cell reselection requirements specified in clause 4.2B.2.3.

A.16.1.1.2.2 Test Parameters

The test scenario comprises of 1 NR carrier and 2 cells as given in tables A.16.1.1.2.2-1, A.16.1.1.2.2-2 and A.16.1.1.2.2-3. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Only cell 1 is already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2.

Table A.16.1.1.2.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.16.1.1.2.2-2: General test parameters for intra frequency NR cell re-selection test case for 2 Rx UE

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4	Cell1	
T2 end condition	Active cell		1, 2, 3, 4	Cell2	
	Neighbour cells		1, 2, 3, 4	Cell1	
Final condition	Active cell		1, 2, 3, 4	Cell1	
	Neighbour cells		1, 2, 3, 4	Cell2	
RF Channel Number			1, 2, 3, 4	1	
Time offset between cells			1, , 4	3 ms	Asynchronous cells
			2	3 μs	Synchronous cells
			3	3 μs	Synchronous cells
Access Barring Information		-	1, 2, 3, 4	Not Sent	No additional delays in random access procedure.
SSB configuration			1, 4	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.1 RedCap FR1	
SMTC configuration			1, 4	SMTC.2	Configured in SIB2 of Cell 1
				SMTC.6	Configured in SIB2 of Cell 2
			2	SMTC.1	
			3	SMTC.1	
DRX cycle length		s	1, 2, 3, 4	1.28	The value shall be used for all cells in the test.
PRACH configuration index			1, 2, 3, 4	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2, 3, 4	Not configured	
T1		s	1, 2, 3, 4	>7	During T1, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed, The intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T2
T2		s	1, 2, 3, 4	[40]	T2 needs to be defined so that cell re-selection reaction time is taken into account.
T3		s	1, 2, 3, 4	15	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.16.1.1.2.2-3: Cell specific test parameters for intra frequency NR cell re-selection test case in AWGN for 2 Rx UE

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1, 4	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
PDSCH RMC configuration		1, 4	SR.1.1 FDD			SR.1.1 FDD		
		2	SR.1.1 TDD			SR.1.1 TDD		
		3	SR.2.1 TDD			SR.2.1 TDD		

RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD			CCR.1.1 FDD		
		2	CCR.1.1 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
OCNG Pattern		1, 2, 3, 4	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1, 2, 3, 4	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3, 4	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2, 3, 4	SSB			SSB		
Qrxlevmin	dBm/SCS	1, 2, 4	-130			-130		
		3	-127			-127		
Pcompensation	dB	1, 2, 3, 4	0			0		
$Qhyst_s$	dB	1, 2, 3	0			0		
$Qoffset_{s,n}$	dB	1, 2, 3, 4	0			0		
Cell_selection_and_reselection_quality_measurement		1, 2, 3, 4	SS-RSRP			SS-RSRP		
$\hat{E}_s / I_{ot}$	dB	1, 4	16	-3.11	2.79	-infinity	2.79	-3.11
		2						
		3						
N_{oc} Note2	dBm/SCS	1, 4	-98					
		2	-98					
		3	-95					
N_{oc} Note2	dBm/15 kHz	1, 4	-98					
		2						
		3						
$\hat{E}_s / N_{oc}$	dB	1, 4	16	13	16	-infinity	16	13
		2						
		3						
SS-RSRP Note3	dBm/SCS	1, 4	-82	-85	-82	-infinity	-82	-85
		2	-82	-85	-82	-infinity	-82	-85
		3	-79	-82	-79	-infinity	-79	-82
Io	dBm/9.36 MHz	1, 4	-53.94	-52.21	-52.21	Same as parameters specified in Cell 1 columns-		
	dBm/9.36 MHz	2	-53.94	-52.21	-52.21			
	dBm/18.36 MHz	3	-51.01	-49.30	-49.30			
Treselection	s	1, 2, 3, 4	0	0	0	0	0	0
SintrasearchP	dB	1, 2, 3, 4	60			60		
Propagation Condition		1, 2, 3, 4	AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.16.1.1.2.3 Test Requirements

The cell reselection delay to a newly detectable cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the

RRCSetupRequest message to perform a Registration procedure for mobility and periodic registration update on Cell 2.

The cell re-selection delay to a newly detectable cell shall be less than 34 s.

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on cell 1.

The cell re-selection delay to an already detected cell shall be less than 8 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a newly detectable cell can be expressed as: $T_{detect, NR_Intra} + T_{SI-NR}$, and to an already detected cell can be expressed as: $T_{evaluate, NR_ intra} + T_{SI-NR}$,

Where:

T_{detect, NR_Intra} See Table 4.2.2.3-1 in clause 4.2.2.3

$T_{evaluate, NR_ intra}$ See Table 4.2.2.3-1 in clause 4.2.2.3

T_{SI-NR} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280ms is assumed in this test case.

This gives a total of 33.28 s, allow 34 s for the cell re-selection delay to a newly detectable cell and 7.68 s for the cell re-selection delay to an already detected cell in the test case, which we allow 8 s.

A.16.1.1.3 Cell reselection to FR1 inter-frequency NR case for 1 Rx UE

A.16.1.1.3.1 Test Purpose and Environment

This test is to verify the requirement for the inter frequency NR cell reselection requirements specified in clause 4.2B.2.4.

A.16.1.1.3.2 Test Parameters

The test scenario comprises of 2 cells on 2 different NR carriers respectively as given in tables A.16.1.1.3.2-1, A.16.1.1.3.2-2 and A.16.1.1.3.2-3. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas and cell 2 is of higher priority than cell 1.

Table A.16.1.1.3.2-1: Supported test configurations

Configuration	Description of serving cell	Description of target cell
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.16.1.1.3.2-2: General test parameters for FR1 inter frequency NR cell re-selection test case for 1 Rx UE

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4	Cell2	The UE camps on cell 2 in the initial phase and during T1 period the UE reselects to cell 1
	Neighbour cell		1, 2, 3, 4	Cell 1	
T1 end condition	Active cell		1, 2, 3, 4	Cell1	The UE shall perform reselection to cell 1 during T1
	Neighbour cells		1, 2, 3, 4	Cell2	
T3 end condition	Active cell		1, 2, 3, 4	Cell2	The UE shall perform reselection to cell 2 with higher priority during T3
	Neighbour cell		1, 2, 3, 4	Cell 1	
RF Channel Number			1, 2, 3, 4	1, 2	
Time offset between cells			1, 4	3 ms	Asynchronous cells
			2	3 µs	Synchronous cells
			3	3 µs	Synchronous cells
Access Barring Information		-	1, 2, 3, 4	Not Sent	No additional delays in random access procedure.
SSB configuration			1, 4	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.1 RedCap FR1	
SMTC configuration			1, 4	SMTC.2	Configured in SIB4 of Cell 1
				SMTC.6	Configured in SIB4 of Cell 2
			2	SMTC.1	
			3	SMTC.1	
DRX cycle length		s	1, 2, 3, 4	1.28	The value shall be used for all cells in the test.
PRACH configuration index			1, 2, 3, 4	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2, 3, 4	Not configured	
T1		s	1, 2, 3, 4	15	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2		s	1, 2, 3, 4	>7	During T2, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T3.
T3		s	1, 2, 3, 4	75	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.16.1.1.3.2-3: Cell specific test parameters for FR1 inter frequency NR cell re-selection test case in AWGN for 1 Rx UE

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1, 4	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
PDSCH RMC configuration		1, 4	SR.1.1 FDD			SR.1.1 FDD		
		2	SR.1.1 TDD			SR.1.1 TDD		

		3	SR.2.1 TDD			SR.2.1 TDD		
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD			CCR.1.1 FDD		
		2	CCR.1.1 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
OCNG Pattern		1, 2, 3, 4	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1, 2, 3, 4	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3, 4	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2, 3, 4	SSB			SSB		
Qrxlevmin	dBm/SCS	1, 2, 4	-140			-140		
		3	-137			-137		
Pcompensation	dB	1, 2, 3, 4	0			0		
Cell_selection_and_reselection_quality_measurement		1, 2, 3, 4	SS-RSRP			SS-RSRP		
$\hat{E}_s / I_{ot}$	dB	1, 4	14	14	14	-4	-infinity	12
		2						
		3						
N_{oc} Note2	dBm/SCS	1, 4	-98					
		2	-98					
		3	-95					
N_{oc} Note2	dBm/15 kHz	1, 4	-98					
		2						
		3						
$\hat{E}_s / N_{oc}$	dB	1, 4	14	14	14	-4	-infinity	12
		2						
		3						
SS-RSRP Note3	dBm/SCS	1, 4	-84	-84	-84	-102	-infinity	-86
		2	-84	-84	-84	-102	-infinity	-86
		3	-81	-81	-81	-99	-infinity	-83
Io	dBm/9.36 MHz	1, 4	-55.88	-55.88	-55.88	-68.60	-70.05	-57.78
	dBm/9.36 MHz	2	-55.88	-55.88	-55.88	-68.60	-70.05	-57.78
	dBm/18.36 MHz	3	-52.95	-52.95	-52.95	-65.67	-67.13	-54.86
Treselection	s	1, 2, 3, 4	0	0	0	0	0	0
SnonintrasearchP	dB	1, 2, 3, 4	50			50		
$Thresh_{x, highP}$	dB	1, 2, 3, 4	48			48		
$Thresh_{serving, lowP}$	dB	1, 2, 3, 4	44			44		
$Thresh_{x, lowP}$	dB	1, 2, 3, 4	50			50		
Propagation Condition		1, 2, 3, 4	AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.16.1.1.3.3 Test Requirements

The cell reselection delay to a higher priority cell is defined as the time from the beginning of time period T3, to the moment when the UE camps again on cell 2, and starts to send preambles on the PRACH for sending the

RRCSetupRequest message to perform a Registration procedure for mobility and periodic registration update on cell 2.

The cell re-selection delay to a higher priority cell shall be less than 68 s.

The cell reselection delay to a lower priority cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on cell 1.

The cell re-selection delay to a lower priority cell shall be less than 8 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a higher priority cell can be expressed as: $T_{higher_priority_search}$ + $T_{evaluate,NR_Inter_RedCap}$ + T_{SI-NR}, and to a lower priority cell can be expressed as: $T_{evaluate,NR_Inter_RedCap}$ + T_{SI-NR},

Where:

$T_{higher_priority_search}$ See clause 4.2B.2.7

$T_{evaluate,NR_Inter_RedCap}$ See Table 4.2B.2.4-1 in clause 4.2B.2.4

T_{SI-NR} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 67.68 s, allow 68 s for the cell re-selection delay to a higher priority cell and 7.68 s for the cell re-selection delay to a lower priority cell in the test case, which we allow 8 s.

A.16.1.1.4 Cell reselection to FR1 inter-frequency NR case for 2 Rx UE

A.16.1.1.4.1 Test Purpose and Environment

This test is to verify the requirement for the inter frequency NR cell reselection requirements specified in clause 4.2B.2.4.

A.16.1.1.4.2 Test Parameters

The test scenario comprises of 2 cells on 2 different NR carriers respectively as given in tables A.16.1.1.4.2-1, A.16.1.1.4.2-2 and A.16.1.1.4.2-3. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas and cell 2 is of higher priority than cell 1.

Table A.16.1.1.4.2-1: Supported test configurations

Configuration	Description of serving cell	Description of target cell
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.16.1.1.4.2-2: General test parameters for FR1 inter frequency NR cell re-selection test case for 2 Rx UE

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4	Cell2	The UE camps on cell 2 in the initial phase and during T1 period the UE reselects to cell 1
	Neighbour cell		1, 2, 3, 4	Cell 1	
T1 end condition	Active cell		1, 2, 3, 4	Cell1	The UE shall perform reselection to cell 1 during T1
	Neighbour cells		1, 2, 3, 4	Cell2	
T3 end condition	Active cell		1, 2, 3, 4	Cell2	The UE shall perform reselection to cell 2 with higher priority during T3
	Neighbour cell		1, 2, 3, 4	Cell 1	
RF Channel Number			1, 2, 3, 4	1, 2	
Time offset between cells			1, 4	3 ms	Asynchronous cells
			2	3 µs	Synchronous cells
			3	3 µs	Synchronous cells
Access Barring Information		-	1, 2, 3, 4	Not Sent	No additional delays in random access procedure.
SSB configuration			1, 4	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.1 RedCap FR1	
SMTC configuration			1, 4	SMTC.2	Configured in SIB4 of Cell 1
				SMTC.6	Configured in SIB4 of Cell 2
			2	SMTC.1	
			3	SMTC.1	
DRX cycle length		s	1, 2, 3, 4	1.28	The value shall be used for all cells in the test.
PRACH configuration index			1, 2, 3, 4	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2, 3, 4	Not configured	
T1		s	1, 2, 3, 4	15	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2		s	1, 2, 3, 4	>7	During T2, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T3.
T3		s	1, 2, 3	75	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.16.1.1.4.2-3: Cell specific test parameters for FR1 inter frequency NR cell re-selection test case in AWGN for 2 Rx UE

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1, 4	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
PDSCH RMC configuration		1, 4	SR.1.1 FDD			SR.1.1 FDD		
		2	SR.1.1 TDD			SR.1.1 TDD		

		3	SR.2.1 TDD			SR.2.1 TDD		
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD			CCR.1.1 FDD		
		2	CCR.1.1 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
OCNG Pattern		1, 2, 3, 4	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1, 2, 3, 4	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3, 4	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2, 3, 4	SSB			SSB		
Qrxlevmin	dBm/SCS	1, 2, 4	-140			-140		
		3	-137			-137		
Pcompensation	dB	1, 2, 3, 4	0			0		
Cell_selection_and_reselection_quality_measurement		1, 2, 3, 4	SS-RSRP			SS-RSRP		
$\hat{E}_s / I_{ot}$	dB	1, 4	14	14	14	-4	-infinity	12
		2						
		3						
N_{oc} Note2	dBm/SCS	1, 4	-98					
		2	-98					
		3	-95					
N_{oc} Note2	dBm/15 kHz	1, 4	-98					
		2						
		3						
$\hat{E}_s / N_{oc}$	dB	1, 4	14	14	14	-4	-infinity	12
		2						
		3						
SS-RSRP Note3	dBm/SCS	1, 4	-84	-84	-84	-102	-infinity	-86
		2	-84	-84	-84	-102	-infinity	-86
		3	-81	-81	-81	-99	-infinity	-83
Io	dBm/9.36 MHz	1, 4	-55.88	-55.88	-55.88	-68.60	-70.05	-57.78
	dBm/9.36 MHz	2	-55.88	-55.88	-55.88	-68.60	-70.05	-57.78
	dBm/18.36 MHz	3	-52.95	-52.95	-52.95	-65.67	-67.12	-54.85
Treselection	s	1, 2, 3, 4	0	0	0	0	0	0
SnonintrasearchP	dB	1, 2, 3, 4	50			50		
$Thresh_{x, highP}$	dB	1, 2, 3, 4	48			48		
$Thresh_{serving, lowP}$	dB	1, 2, 3, 4	44			44		
$Thresh_{x, lowP}$	dB	1, 2, 3, 4	50			50		
Propagation Condition		1, 2, 3, 4	AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.16.1.1.4.3 Test Requirements

The cell reselection delay to a higher priority cell is defined as the time from the beginning of time period T3, to the moment when the UE camps again on cell 2, and starts to send preambles on the PRACH for sending the

RRCSetupRequest message to perform a Registration procedure for mobility and periodic registration update on cell 2.

The cell re-selection delay to a higher priority cell shall be less than 68 s.

The cell reselection delay to a lower priority cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on cell 1.

The cell re-selection delay to a lower priority cell shall be less than 8 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a higher priority cell can be expressed as: $T_{higher_priority_search}$ + $T_{evaluate,NR_Inter_RedCap}$ + T_{SI-NR}, and to a lower priority cell can be expressed as: $T_{evaluate,NR_Inter_RedCap}$ + T_{SI-NR},

Where:

$T_{higher_priority_search}$ See clause 4.2B.2.7

$T_{evaluate,NR_Inter_RedCap}$ See Table 4.2B.2.4-1 in clause 4.2B.2.4

T_{SI-NR} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 67.68 s, allow 68 s for the cell re-selection delay to a higher priority cell and 7.68 s for the cell re-selection delay to a lower priority cell in the test case, which we allow 8 s.

A.16.1.1.5 Cell reselection to FR1 intra-frequency NR case for UE fulfilling stationary relaxed measurement criterion for 1 Rx UE

A.16.1.1.5.1 Test Purpose and Environment

This test is to verify the requirement for the intra frequency NR cell reselection requirements for UE fulfilling stationary relaxed measurement criterion specified in clause 4.2B.2.9.2.

A.16.1.1.5.2 Test Parameters

The test scenario comprises of 1 NR carrier and 2 cells as given in tables A.16.1.1.5.2-1, A.16.1.1.5.2-2 and A.16.1.1.5.2-3. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2.

Table A.16.1.1.5.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.16.1.1.5.2-2: General test parameters for FR1 intra frequency NR cell re-selection test case for UE fulfilling stationary relaxed measurement criterion for 1 Rx UE

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4	Cell1	The UE camps on cell 1 in the initial phase
	Neighbour cells		1, 2, 3, 4	Cell2	
T1 end condition	Active cell		1, 2, 3, 4	Cell2	The UE reselects to cell 2 during T1 period
	Neighbour cells		1, 2, 3, 4	Cell1	
Final condition	Active cell		1, 2, 3, 4	Cell1	The UE reselects to cell 1 during T2 period
	Neighbour cells		1, 2, 3, 4	Cell2	
RF Channel Number			1, 2, 3, 4	1	
Time offset between cells			1, 4	3 ms	Asynchronous cells
			2	3 μs	Synchronous cells
			3	3 μs	Synchronous cells
Access Barring Information		-	1, 2, 3, 4	Not Sent	No additional delays in random access procedure.
SSB configuration			1, 4	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.1 RedCap FR1	
SMTC configuration			1, 4	SMTC.2	Configured in SIB2 of Cell 1
				SMTC.6	Configured in SIB2 of Cell 2
			2	SMTC.1	
			3	SMTC.1	
DRX cycle length		s	1, 2, 3, 4	0.64	The value shall be used for all cells in the test.
PRACH configuration index			1, 2, 3, 4	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2, 3, 4	Not configured	
T1		s	1, 2, 3, 4	35	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2		s	1, 2, 3, 4	35	T2 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.16.1.1.5.2-3: Cell specific test parameters for FR1 intra frequency NR cell re-selection test case in AWGN for UE fulfilling stationary relaxed measurement criterion for 1 Rx UE

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 4	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	

		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD		SR.1.1 FDD SR.1.1 TDD SR.2.1 TDD	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD		CR.1.1 FDD	
		2	CR.1.1 TDD		CR.1.1 TDD	
		3	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD		CCR.1.1 FDD	
		2	CCR.1.1 TDD		CCR.1.1 TDD	
		3	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Pattern		1, 2, 3, 4	OP.1 defined in A.3.2.1		OP.1 defined in A.3.2.1	
Initial DL BWP configuration		1, 2, 3, 4	DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3, 4	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1, 2, 3, 4	SSB		SSB	
Qrxlevmin	dBm/SCS	1, 2, 4	-140		-140	
		3	-137		-137	
Pcompensation	dB	1, 2, 3, 4	0		0	
$Qhyst_s$	dB	1, 2, 3, 4	0		0	
$Qoffset_{s,n}$	dB	1, 2, 3, 4	0		0	
$S_{SearchDeltaP-Stationary}$	dB	1, 2, 3, 4	3		3	
$T_{SearchDeltaP-Stationary}$	s	1, 2, 3, 4	5		5	
Cell_selection_and_reselection_quality_measurement		1, 2, 3, 4	SS-RSRP		SS-RSRP	
$\hat{E}_s / I_{ot}$	dB	1, 2, 3, 4	-3.11	2.79	2.79	-3.11
N_{oc} Note2	dBm/SCS	1, 4	-98			
		2	-98			
		3	-95			
N_{oc} Note2	dBm/15 kHz	1, 2, 3, 4	-98			
$\hat{E}_s / N_{oc}$	dB	1, 2, 3, 4	13	16	16	13
SS-RSRP Note3	dBm/SCS	1, 4	-85	-82	-82	-85
		2	-85	-82	-82	-85
		3	-82	-79	-79	-82
Io	dBm/9.36 MHz	1, 4	-52.21	-52.21	specified in Cell 1 columns-	
	dBm/9.36 MHz	2	-52.21	-52.21		
	dBm/18.36 MHz	3	-49.28	-49.28		
Treselection	s	1, 2, 3, 4	0	0	0	0
SintrasearchP	dB	1, 2, 3, 4	60		60	
Propagation Condition		1, 2, 3, 4	AWGN			

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.16.1.1.5.3 Test Requirements

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 2.

The cell re-selection delay to an already detected cell shall be less than 32 s.

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 1.

The cell re-selection delay to an already detected cell shall be less than 32 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to an already detected cell can be expressed as: $T_{evaluate,NR_Intra_RedCap_Relax}$ + T_{SI-NR},

Where:

$T_{evaluate,NR_Intra_RedCap_Relax}$ See Table 4.2B.2.9.2-1 in clause 4.2B.2.9.2 for reselection to Cell 2 during T1 with UE fulfilling stationary criterion, 30.72 s.

T_{SI-NR} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 32 s for the cell re-selection delay to an already detected cell for UE fulfilling stationary criterion in the test case.

A.16.1.1.6 Cell reselection to FR1 intra-frequency NR case for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE

A.16.1.1.6.1 Test Purpose and Environment

This test is to verify the requirement for the intra frequency NR cell reselection requirements for UE fulfilling stationary relaxed measurement criterion specified in clause 4.2B.2.9.2.

A.16.1.1.6.2 Test Parameters

The test scenario comprises of 1 NR carrier and 2 cells as given in tables A.16.1.1.6.2-1, A.16.1.1.6.2-2 and A.16.1.1.6.2-3. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2.

Table A.16.1.1.6.2-1: Supported test configurations

Configuration	Description

1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.16.1.1.6.2-2: General test parameters for FR1 intra frequency NR cell re-selection test case for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4	Cell1	The UE camps on cell 1 in the initial phase
	Neighbour cells		1, 2, 3, 4	Cell2	
T1 end condition	Active cell		1, 2, 3, 4	Cell2	The UE reselects to cell 2 during T1 period
	Neighbour cells		1, 2, 3, 4	Cell1	
Final condition	Active cell		1, 2, 3, 4	Cell1	The UE reselects to cell 1 during T2 period
	Neighbour cells		1, 2, 3, 4	Cell2	
RF Channel Number			1, 2, 3, 4	1	
Time offset between cells			1, 4	3 ms	Asynchronous cells
			2	3 μs	Synchronous cells
			3	3 μs	Synchronous cells
Access Barring Information		-	1, 2, 3	Not Sent	No additional delays in random access procedure.
SSB configuration			1, 4	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.1 RedCap FR1	
SMTC configuration			1, 4	SMTC.2	Configured in SIB2 of Cell 1
				SMTC.6	Configured in SIB2 of Cell 2
			2	SMTC.1	
			3	SMTC.1	
DRX cycle length		s	1, 2, 3, 4	0.64	The value shall be used for all cells in the test.
PRACH configuration index			1, 2, 3, 4	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2, 3, 4	Not configured	
T1		s	1, 2, 3, 4	35	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2		s	1, 2, 3, 4	35	T2 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.16.1.1.6.2-3: Cell specific test parameters for FR1 intra frequency NR cell re-selection test case in AWGN for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 4	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD		SR.1.1 FDD SR.1.1 TDD SR.2.1 TDD	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD		CR.1.1 FDD	
		2	CR.1.1 TDD		CR.1.1 TDD	
		3	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD		CCR.1.1 FDD	
		2	CCR.1.1 TDD		CCR.1.1 TDD	
		3	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Pattern		1, 2, 3, 4	OP.1 defined in A.3.2.1		OP.1 defined in A.3.2.1	
Initial DL BWP configuration		1, 2, 3, 4	DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3, 4	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1, 2, 3, 4	SSB		SSB	
Qrxlevmin	dBm/SCS	1, 2, 4	-140		-140	
		3	-137		-137	
Pcompensation	dB	1, 2, 3, 4	0		0	
$Qhyst_s$	dB	1, 2, 3, 4	0		0	
$Qoffset_{s,n}$	dB	1, 2, 3, 4	0		0	
$S_{SearchDeltaP-Stationary}$	dB	1, 2, 3, 4	3		3	
$T_{SearchDeltaP-Stationary}$	s	1, 2, 3, 4	5		5	
Cell_selection_and_reselection_quality_measurement		1, 2, 3, 4	SS-RSRP		SS-RSRP	
$\hat{E}_s / I_{ot}$	dB	1, 2, 3, 4	-3.11	2.79	2.79	-3.11
N_{oc} Note2	dBm/SCS	1, 4	-98			
		2	-98			
		3	-95			
N_{oc} Note2	dBm/15 kHz	1, 2, 3, 4	-98			
$\hat{E}_s / N_{oc}$	dB	1, 2, 3, 4	13	16	16	13
SS-RSRP Note3	dBm/SCS	1, 4	-85	-82	-82	-85
		2	-85	-82	-82	-85
		3	-82	-79	-79	-82
Io	dBm/9.36 MHz	1, 4	-52.21	-52.21		

	dBm/9.36 MHz	2	-52.21	-52.21	specified in Cell 1 columns-	
	dBm/18.36 MHz	3	-49.28	-49.28		
Treselection	s	1, 2, 3, 4	0	0	0	0
SintrasearchP	dB	1, 2, 3, 4	60		60	
Propagation Condition		1, 2, 3, 4	AWGN			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.16.1.1.6.3 Test Requirements

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 2.

The cell re-selection delay to an already detected cell shall be less than 32 s.

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 1.

The cell re-selection delay to an already detected cell shall be less than 32 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to an already detected cell can be expressed as: $T_{evaluate,NR_Intra_RedCap_Relax}$ + T_{SI-NR},

Where:

$T_{evaluate,NR_Intra_RedCap_Relax}$ See Table 4.2B.2.9.2-2 in clause 4.2B.2.9.2 for reselection to Cell 2 during T1 with UE fulfilling stationary criterion, 30.72 s.

T_{SI-NR} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 32 s for the cell re-selection delay to an already detected cell for UE fulfilling stationary criterion in the test case.

A.16.1.1.7 Cell reselection to FR1 inter-frequency NR case for UE fulfilling stationary relaxed measurement criterion for 1 Rx UE

A.16.1.1.7.1 Test Purpose and Environment

This test is to verify the requirement for the inter frequency NR cell reselection requirements specified in clause 4.2B.2.10.2, for UE fulfilling stationary relaxed measurement criterion.

A.16.1.1.7.2 Test Parameters

The test scenario comprises of 2 cells on 2 different NR carriers respectively as given in tables A.16.1.1.7.2-1, A.16.1.1.7.2-2 and A.16.1.1.7.2-3. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas and cell 2 is of higher priority than cell 1.

As specified in the Test Purpose, the UE is configured with the stationary relaxed measurement criterion for UE defined in clause 5.2.4.9.1 in [1]. So, Cell 2 and Cell 1 configure the UE as follows:

- *stationaryMobilityEvaluation* [2] criterion is configured according to the parameters listed in Table A.16.1.1.7.2-3;
- *cellEdgeEvaluationWhileStationary* [2] criterion is not configured;
- *combineRelaxedMeasCondition2* [2] is not configured;

Table A.16.1.1.7.2-1: Supported test configurations

Configuration	Description of serving cell	Description of target cell
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.16.1.1.7.2-2: General test parameters for FR1 inter frequency NR cell re-selection test case for UE fulfilling stationary relaxed measurement criterion for 1 Rx UE

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4	Cell2	The UE camps on cell 2 in the initial phase, it fulfills stationary relaxation measurements criterion, and during T1 period the UE reselects to cell 1
	Neighbour cells		1, 2, 3, 4	Cell1	
T1 end condition	Active cell		1, 2, 3, 4	Cell1	The UE shall perform reselection to cell 1 during T1
	Neighbour cells		1, 2, 3, 4	Cell2	
T2 end condition	Active cell		1, 2, 3, 4	Cell2	The UE shall perform reselection to cell 2 with higher priority during T2
	Neighbour cells		1, 2, 3, 4	Cell1	
RF Channel Number			1, 2, 3, 4	1, 2	
Time offset between cells			1, 4	3 ms	Asynchronous cells
			2	3 µs	Synchronous cells
			3	3 µs	Synchronous cells
Access Barring Information		-	1, 2, 3, 4	Not Sent	No additional delays in random access procedure.
SSB Configuration			1, 4	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.1 RedCap FR1	
SMTC configuration			1, 4	SMTC.2	Configured in SIB4 of Cell 1
				SMTC.6	Configured in SIB4 of Cell 2
			2	SMTC.1	
			3	SMTC.1	
DRX cycle length		s	1, 2, 3, 4	0.64	The value shall be used for all cells in the test.
PRACH configuration index			1, 2, 3, 4	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2, 3, 4	Not configured	

T1	s	1, 2, 3, 4	35	T1 is defined so that cell re-selection reaction time is taken into account.
T2	s	1, 2, 3, 4	35	T2 is defined so that cell re-selection reaction time is taken into account.

Table A.16.1.1.7.2-3: Cell specific test parameters for FR1 inter frequency NR cell re-selection test case in AWGN for UE fulfilling stationary relaxed measurement criterion for 1 Rx UE

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 4	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD		SR.1.1 FDD	
		2	SR.1.1 TDD		SR.1.1 TDD	
		3	SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD		CR.1.1 FDD	
		2	CR.1.1 TDD		CR.1.1 TDD	
		3	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD		CCR.1.1 FDD	
		2	CCR.1.1 TDD		CCR.1.1 TDD	
		3	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Pattern		1, 2, 3, 4	OP.1 defined in A.3.2.1		OP.1 defined in A.3.2.1	
Initial DL BWP configuration		1, 2, 3, 4	DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3, 4	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1, 2, 3, 4	SSB		SSB	
Qrxlevmin	dBm/SCS	1, 2, 4	-140		-140	
		3	-137		-137	
Pcompensation	dB	1, 2, 3, 4	0		0	
$Qhyst_s$	dB	1, 2, 3, 4	0		0	
$Qoffset_{s,n}$	dB	1, 2, 3, 4	0		0	
Cell_selection_and_reselection_quality_measurement		1, 2, 3, 4	SS-RSRP		SS-RSRP	
$\hat{E}_s / I_{ot}$	dB	1, 4	14	14	-4	12
		2				
		3				
N_{oc} Note2	dBm/SCS	1, 4	-98			
		2	-98			
		3	-95			
N_{oc} Note2	dBm/15 kHz	1, 4	-98			
		2				
		3				
$\hat{E}_s / N_{oc}$	dB	1, 4	14	14	-4	12
		2				
		3				
SS-RSRP Note3	dBm/SCS	1, 4	-84	-84	-102	-86
		2	-84	-84	-102	-86
		3	-81	-81	-99	-83
Io	dBm/9.36 MHz	1, 4	-55.88	-55.88	-68.60	-57.78
	dBm/9.36 MHz	2	-55.88	-55.88	-68.60	-57.78
	dBm/18.36 MHz	3	-52.96	-52.96	-65.67	-54.85
Treselection	s	1, 2, 3, 4	0	0	0	0

SnonintrasearchP	dB	1, 2, 3, 4	Not sent	Not sent
$Thresh_{x, highP}$	dB	1, 2, 3, 4	48	48
$Thresh_{serving, lowP}$	dB	1, 2, 3, 4	44	44
$Thresh_{x, lowP}$	dB	1, 2, 3, 4	50	50
$S_{SearchDeltaP-Stationary}$	dB	1, 2, 3	3	3
$T_{SearchDeltaP-Stationary}$	s	1, 2, 3	5	5
Propagation Condition		1, 2, 3	AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.16.1.1.7.3 Test Requirements

The cell reselection delay to an already detected lower priority cell for UE fulfilling stationary relaxed measurements is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 1.

The cell re-selection delay to a lower priority cell for UE fulfilling stationary relaxed measurements shall be less than 32 s.

The cell reselection delay to an already detected higher priority cell for UE fulfilling stationary relaxed measurements is defined as the time from the beginning of time period T2, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the RRCSetupRequest message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to an already detected higher priority cell for UE fulfilling stationary relaxed measurements shall be less than 32 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a known lower priority cell can be expressed as: $T_{evaluate,NR_Inter_RedCap_Relax} + T_{SI-NR}$,

Where:

$T_{evaluate,NR_Inter_RedCap_Relax}$ See Table 4.2B.2.10.2-1 in clause 4.2B.2.10.2

T_{SI-NR} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 32 s for the cell re-selection delay to an already detected lower priority cell and 32 s for the cell re-selection delay to an already detected higher priority cell, for UE fulfilling stationary relaxed measurements in the test case.

A.16.1.1.8 Cell reselection to FR1 inter-frequency NR case for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE

A.16.1.1.8.1 Test Purpose and Environment

This test is to verify the requirement for the inter frequency NR cell reselection requirements specified in clause 4.2B.2.10.2, for UE fulfilling stationary relaxed measurement criterion.

A.16.1.1.8.2 Test Parameters

The test scenario comprises of 2 cells on 2 different NR carriers respectively as given in tables A.16.1.1.8.2-1, A.16.1.1.8.2-2 and A.16.1.1.8.2-3. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas and cell 2 is of higher priority than cell 1.

As specified in the Test Purpose, the UE is configured with the stationary relaxed measurement criterion for UE defined in clause 5.2.4.9.1 in [1]. So, Cell 2 and Cell 1 configure the UE as follows:

- *stationaryMobilityEvaluation* [2] criterion is configured according to the parameters listed in Table A.16.1.1.8.2-3;
- *cellEdgeEvaluationWhileStationary* [2] criterion is not configured;
- *combineRelaxedMeasCondition2* [2] is not configured;

Table A.16.1.1.8.2-1: Supported test configurations

Configuration	Description of serving cell	Description of target cell
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.16.1.1.8.2-2: General test parameters for FR1 inter frequency NR cell re-selection test case for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4	Cell2	The UE camps on cell 2 in the initial phase, it fulfills stationary relaxation measurements criterion, and during T1 period the UE reselects to cell 1
	Neighbour cells		1, 2, 3, 4	Cell1	
T1 end condition	Active cell		1, 2, 3, 4	Cell1	The UE shall perform reselection to cell 1 during T1
	Neighbour cells		1, 2, 3, 4	Cell2	
T2 end condition	Active cell		1, 2, 3, 4	Cell2	The UE shall perform reselection to cell 2 with higher priority during T2
	Neighbour cells		1, 2, 3, 4	Cell1	
RF Channel Number			1, 2, 3, 4	1, 2	
Time offset between cells			1, 4	3 ms	Asynchronous cells
			2	3 µs	Synchronous cells
			3	3 µs	Synchronous cells
Access Barring Information		-	1, 2, 3, 4	Not Sent	No additional delays in random access procedure.
SSB Configuration			1, 4	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.1 RedCap FR1	
SMTC configuration			1, 4	SMTC.2	Configured in SIB4 of Cell 1
				SMTC.6	Configured in SIB4 of Cell 2
			2	SMTC.1	

		3	SMTC.1	
DRX cycle length	s	1, 2, 3, 4	0.64	The value shall be used for all cells in the test.
PRACH configuration index		1, 2, 3, 4	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell		1, 2, 3, 4	Not configured	
T1	s	1, 2, 3, 4	35	T1 is defined so that cell re-selection reaction time is taken into account.
T2	s	1, 2, 3, 4	35	T2 is defined so that cell re-selection reaction time is taken into account.

Table A.16.1.1.8.2-3: Cell specific test parameters for FR1 inter frequency NR cell re-selection test case in AWGN for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 4	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD		SR.1.1 FDD	
		2	SR.1.1 TDD		SR.1.1 TDD	
		3	SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD		CR.1.1 FDD	
		2	CR.1.1 TDD		CR.1.1 TDD	
		3	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD		CCR.1.1 FDD	
		2	CCR.1.1 TDD		CCR.1.1 TDD	
		3	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Pattern		1, 2, 3, 4	OP.1 defined in A.3.2.1		OP.1 defined in A.3.2.1	
Initial DL BWP configuration		1, 2, 3, 4	DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3, 4	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1, 2, 3, 4	SSB		SSB	
Qrxlevmin	dBm/SCS	1, 2, 4	-140		-140	
		3	-137		-137	
Pcompensation	dB	1, 2, 3, 4	0		0	
$Qhyst_s$	dB	1, 2, 3, 4	0		0	
$Qoffset_{s,n}$	dB	1, 2, 3, 4	0		0	
Cell_selection_and_reselection_quality_measurement		1, 2, 3, 4	SS-RSRP		SS-RSRP	
$\hat{E}_s / I_{ot}$	dB	1, 4	14	14	-4	12
		2				
		3				
N_{oc} Note2	dBm/SCS	1, 4	-98			
		2	-98			
		3	-95			
N_{oc} Note2	dBm/15 kHz	1, 4	-98			
		2				
		3				
$\hat{E}_s / N_{oc}$	dB	1, 4	14	14	-4	12
		2				
		3				
SS-RSRP Note3	dBm/SCS	1, 4	-84	-84	-102	-86
		2	-84	-84	-102	-86
		3	-81	-81	-99	-83
Io	dBm/9.36 MHz	1, 4	-55.88	-55.88	-68.60	-57.78
	dBm/9.36 MHz	2	-55.88	-55.88	-68.60	-57.78
	dBm/18.36 MHz	3	-52.95	-52.95	-65.67	-54.86
Treselection	s	1, 2, 3, 4	0	0	0	0

SnonintrasearchP	dB	1, 2, 3, 4	Not sent	Not sent
$Thresh_{x, highP}$	dB	1, 2, 3, 4	48	48
$Thresh_{serving, lowP}$	dB	1, 2, 3, 4	44	44
$Thresh_{x, lowP}$	dB	1, 2, 3, 4	50	50
$S_{SearchDeltaP-Stationary}$	dB	1, 2, 3, 4	3	3
$T_{SearchDeltaP-Stationary}$	s	1, 2, 3, 4	5	5
Propagation Condition		1, 2, 3, 4	AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.16.1.1.8.3 Test Requirements

The cell reselection delay to an already detected lower priority cell for UE fulfilling stationary relaxed measurements is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 1.

The cell re-selection delay to a lower priority cell for UE fulfilling stationary relaxed measurements shall be less than 32 s.

The cell reselection delay to an already detected higher priority cell for UE fulfilling stationary relaxed measurements is defined as the time from the beginning of time period T2, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the RRCSetupRequest message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to an already detected higher priority cell for UE fulfilling stationary relaxed measurements shall be less than 32 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a known lower priority cell can be expressed as: $T_{evaluate,NR_Inter_RedCap_Relax} + T_{SI-NR}$,

Where:

$T_{evaluate,NR_Inter_RedCap_Relax}$ See Table 4.2B.2.10.2-2 in clause 4.2B.2.10.2

T_{SI-NR} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 32 s for the cell re-selection delay to an already detected lower priority cell and 32 s for the cell re-selection delay to an already detected higher priority cell, for UE fulfilling stationary relaxed measurements in the test case.

A.16.1.2 Inter-RAT E-UTRAN cell re-selection for RedCap

A.16.1.2.1 Cell reselection to higher priority E-UTRAN for 1RX

A.16.1.2.1.1 Test Purpose and Environment

This test is to verify the requirement for the NR to E-UTRAN inter-RAT cell reselection requirements specified in clause 4.2B.2.5 when the E-UTRAN cell is of higher priority.

A.16.1.2.1.2 Test Parameters

The test scenario comprises of one NR cell and one E-UTRAN cell as given in tables A.16.1.2.1.2-1, A.16.1.2.1.2-2, A.16.1.2.1.2-3 and A.16.1.2.1.2-4. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. NR cell 1 is already identified by the UE prior to the start of the test. E-UTRAN cell 2 is of higher priority than cell 1.

Table A.16.1.2.1.2-1: Supported test configurations

Configuration	Description of serving cell	Description of target cell
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.16.1.2.1.2-2: General test parameters for NR to E-UTRAN cell re-selection test case

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	The UE camps on cell 1 in the initial phase and during T2 period the UE reselects to cell 2.
T2 end condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell2	The UE shall perform reselection to cell 2 during T2.
	Neighbour cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	
T3 end condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	The UE shall perform reselection to cell 1 during T3 for iteration of the tests.
	Neighbour cell		1, 2, 3, 4, 5, 6, 7, 8	Cell2	
Access Barring Information		-	1, 2, 3, 4, 5, 6, 7, 8	Not Sent	No additional delays in random access procedure.
DRX cycle length		s	1, 2, 3, 4, 5, 6, 7, 8	1.28	The value shall be used for all cells in the test.
NR PRACH configuration index			1, 2, 3, 4, 5, 6, 7, 8	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2

E-UTRAN PRACH configuration index		1, 2, 3, 7	53	As specified in table 5.7.1-2 in TS 36.211 [23]
		4, 5, 6, 8	4	
E-UTRAN PRACH		1, 2, 3	53	As specified in table 5.7.1-2 in TS 36.211 [23]
configuration index		4, 5, 6	4	
T1	s	1, 2, 3, 4, 5, 6, 7, 8	>7	During T1, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T2.
T2	s	1, 2, 3, 4, 5, 6, 7, 8	75	T2 needs to be defined so that cell re-selection reaction time is taken into account.
T3	s	1, 2, 3, 4, 5, 6, 7, 8	15	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.16.1.2.1.2-3: Cell specific test parameters for NR cell 1

Parameter	Unit	Test configuration	Cell 1		
			T1	T2	T3
TDD configuration		1, 4, 7, 8	N/A		
		2, 5	TDDConf.1.1		
		3, 6	TDDConf.2.1		
PDSCH parameters		1, 4, 7, 8	SR.1.1 FDD		
		2, 5	SR.1.1 TDD		
		3, 6	SR.2.1 TDD		
RMSI CORESET parameters		1, 4, 7, 8	CR.1.1 FDD		
		2, 5	CR.1.1 TDD		
		3, 6	CR.2.1 TDD		
Dedicated CORESET parameters		1, 4, 7, 8	CCR.1.1 FDD		
		2, 5	CCR.1.1 TDD		
		3, 6	CCR.2.1 TDD		
SSB parameters		1, 4, 7, 8	SSB.1 FR1		
		2, 5	SSB.1 FR1		
		3, 6	SSB.1 RedCap FR1		
NR SMTC parameters		1, 4, 7, 8	SMTC.2		
		2, 5	SMTC.1		
		3, 6	SMTC.1		
OCNG Pattern		1, 2, 3, 4, 5, 6, 7, 8	OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1, 2, 3, 4, 5, 6, 7, 8	DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3, 4, 5, 6, 7, 8	ULBWP.0.1		
RLM-RS		1, 2, 3, 4, 5, 6, 7, 8	SSB		
Qrxlevmin	dBm/SCS	1, 2, 4, 5	-140		
		3, 6	-137		
N_{oc}	dBm/SCS	1, 4, 7, 8	-98		
		2, 5	-98		
		3, 6	-95		
N_{oc}	dBm/15 kHz	1, 2, 3, 4, 5, 6, 7, 8	-98		
SS-RSRP	dBm/SCS	1, 4, 7, 8	-84	-84	-84
		2, 5	-84	-84	-84
		3, 6	-81	-81	-81
$\hat{E}_s/I_{ot}$	dB	1, 4, 7, 8	14	14	14
		2, 5			

		3, 6			
$\hat{E}_s/N_{oc}$	dB	1, 4, 7, 8	14	14	14
		2, 5			
		3, 6			
Io	dBm/9.36 MHz	1, 4, 7, 8	-55.88	-55.88	-55.88
	dBm/9.36 MHz	2, 5	-55.88	-55.88	-55.88
	dBm/18.36 MHz	3, 6	-52.95	-52.95	-52.95
Treselection	S	1, 2, 3, 4, 5, 6, 7, 8	0		
SnonintrasearchP	dB	1, 2, 3, 4, 5, 6, 7, 8	50		
$Thresh_{x, highP (Note 2)}$	dB	1, 2, 3, 4, 5, 6, 7, 8	48		
$Thresh_{serving, lowP}$	dB	1, 2, 3, 4, 5, 6, 7, 8	44		
$Thresh_{x, lowP}$	dB	1, 2, 3, 4, 5, 6, 7, 8	50		
Propagation Condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: This refers to the value of $Thresh_{x, high}$ which is included in NR system information, and is a threshold for the E-UTRA target cell					

Table A.16.1.2.1.2-4: Cell specific test parameters for E-UTRA cell 2

Parameter	Unit	Cell 2		
		T1	T2	T3
E-UTRA RF Channel number		1		
$BW_{channel}$	MHz	10		
OCNG Patterns defined in TS 36.133 [15] clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6		
PBCH_RA	dB	0		
PBCH_RB	dB			
PSS_RA	dB			
SSS_RA	dB			
PCFICH_RB	dB			
PHICH_RA	dB			
PHICH_RB	dB			
PDCCH_RA	dB			
PDCCH_RB	dB			
PDSCH_RA	dB			
PDSCH_RB	dB			
OCNG_RA[Note 1]	dB			
OCNG_RB[Note 1]	dB			
Qrxlevmin	dBm	-140		
N_{oc}	dBm/15 kHz	-98		
RSRP	dBm/15 KHz	-infinity	-86	-102
$\hat{E}_s/I_{ot}$	dB	-infinity	12	-4
$\hat{E}_s/N_{oc}$	dB	-infinity	12	-4
$Treselection_{EUTRAN}$	S	0		
SnonintrasearchP	dB	Not sent		
$Thresh_{x, highP}$	dB	48		
$Thresh_{serving, lowP}$	dB	44		
$Thresh_{x, lowP (Note 2)}$	dB	50		
Propagation Condition		AWGN		

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	This refers to the value of $Thresh_{x, Low}$ which is included in E-UTRA system information, and is a threshold for the NR target cell

A.16.1.2.1.3 Test Requirements

The cell reselection delay to a higher priority E-UTRAN cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a higher priority cell shall be less than 68 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a higher priority cell can be expressed as: $T_{higher_priority_search_RedCap} + T_{evaluate, E\text{-}UTRAN_RedCap} + T_{SI\text{-}E\text{-}UTRA}$,

Where:

$T_{higher_priority_search_RedCap}$ See clause 4.2B.2.7

$T_{evaluate, E\text{-}UTRAN_RedCap}$ See Table 4.2B.2.5-1 in clause 4.2B.2.5

$T_{SI\text{-}E\text{-}UTRA_}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 67.68 s, allow 68 s for the cell re-selection delay to a higher priority E-UTRAN cell.

A.16.1.2.2 Cell reselection to higher priority E-UTRAN for 2RX

A.16.1.2.2.1 Test Purpose and Environment

This test is to verify the requirement for the NR to E-UTRAN inter-RAT cell reselection requirements specified in clause 4.2.2.5 when the E-UTRAN cell is of higher priority.

A.16.1.2.2.2 Test Parameters

The test scenario comprises of one NR cell and one E-UTRAN cell as given in tables A.16.1.2.2.2-1, A. 16.1.2.2.2-2, A. 16.1.2.2.2-3 and A. 16.1.2.2.2-4. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. NR cell 1 is already identified by the UE prior to the start of the test. E-UTRAN cell 2 is of higher priority than cell 1.

Table A.16.1.2.2.2-1: Supported test configurations

Configuration	Description of serving cell	Description of target cell
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode

7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A. 16.1.2.2.2-2: General test parameters for NR to E-UTRAN cell re-selection test case

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	The UE camps on cell 1 in the initial phase and during T2 period the UE reselects to cell 2.
T2 end condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell2	The UE shall perform reselection to cell 2 during T2.
	Neighbour cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	
T3 end condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	The UE shall perform reselection to cell 1 during T3 for iteration of the tests.
	Neighbour cell		1, 2, 3, 4, 5, 6, 7, 8	Cell2	
Access Barring Information		-	1, 2, 3, 4, 5, 6, 7, 8	Not Sent	No additional delays in random access procedure.
DRX cycle length		s	1, 2, 3, 4, 5, 6, 7, 8	1.28	The value shall be used for all cells in the test.
NR PRACH configuration index			1, 2, 3, 4, 5, 6, 7, 8	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
E-UTRAN PRACH configuration index			1, 2, 3, 7	53	As specified in table 5.7.1-2 in TS 36.211 [23]
			4, 5, 6, 8	4	
E-UTRAN PRACH			1, 2, 3	53	As specified in table 5.7.1-2 in TS 36.211 [23]
configuration index			4, 5, 6	4	
T1		s	1, 2, 3, 4, 5, 6, 7, 8	>7	During T1, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T2.
T2		s	1, 2, 3, 4, 5, 6, 7, 8	75	T2 needs to be defined so that cell re-selection reaction time is taken into account.
T3		s	1, 2, 3, 4, 5, 6, 7, 8	15	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A. 16.1.2.2.2-3: Cell specific test parameters for NR cell 1

Parameter	Unit	Test configuration	Cell 1		
			T1	T2	T3
TDD configuration		1, 4, 7, 8	N/A		
		2, 5	TDDConf.1.1		
		3, 6	TDDConf.2.1		
PDSCH parameters		1, 4, 7, 8	SR.1.1 FDD		
		2, 5	SR.1.1 TDD		
		3, 6	SR.2.1 TDD		
RMSI CORESET parameters		1, 4, 7, 8	CR.1.1 FDD		
		2, 5	CR.1.1 TDD		
		3, 6	CR.2.1 TDD		
Dedicated CORESET parameters		1, 4, 7, 8	CCR.1.1 FDD		

		2, 5	CCR.1.1 TDD		
		3, 6	CCR.2.1 TDD		
SSB parameters		1, 4, 7, 8	SSB.1 FR1		
		2, 5	SSB.1 FR1		
		3, 6	SSB.1 RedCap FR1		
NR SMTC parameters		1, 4, 7, 8	SMTC.2		
		2, 5	SMTC.1		
		3, 6	SMTC.1		
OCNG Pattern		1, 2, 3, 4, 5, 6, 7, 8	OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1, 2, 3, 4, 5, 6, 7, 8	DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3, 4, 5, 6, 7, 8	ULBWP.0.1		
RLM-RS		1, 2, 3, 4, 5, 6, 7, 8	SSB		
Qrxlevmin	dBm/SCS	1, 2, 4, 5	-140		
		3, 6	-137		
N_{oc}	dBm/SCS	1, 4, 7, 8	-98		
		2, 5	-98		
		3, 6	-95		
N_{oc}	dBm/15 kHz	1, 2, 3, 4, 5, 6, 7, 8	-98		
SS-RSRP	dBm/SCS	1, 4, 7, 8	-84	-84	-84
		2, 5	-84	-84	-84
		3, 6	-81	-81	-81
$\hat{E}_s / I_{ot}$	dB	1, 4, 7, 8	14	14	14
		2, 5			
		3, 6			
$\hat{E}_s / N_{oc}$	dB	1, 4, 7, 8	14	14	14
		2, 5			
		3, 6			
Io	dBm/9.36 MHz	1, 4, 7, 8	-55.88	-55.88	-55.88
	dBm/9.36 MHz	2, 5	-55.88	-55.88	-55.88
	dBm/18.36 MHz	3, 6	-52.95	-52.95	-52.95
Treselection	S	1, 2, 3, 4, 5, 6, 7, 8	0		
SnonintrasearchP	dB	1, 2, 3, 4, 5, 6, 7, 8	50		
$Thresh_{x, highP}$ (Note 2)	dB	1, 2, 3, 4, 5, 6, 7, 8	48		
$Thresh_{serving, lowP}$	dB	1, 2, 3, 4, 5, 6, 7, 8	44		
$Thresh_{x, lowP}$	dB	1, 2, 3, 4, 5, 6, 7, 8	50		
Propagation Condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: This refers to the value of $Thresh_{x, high}$ which is included in NR system information, and is a threshold for the E-UTRA target cell

Table A. 16.1.2.2.2-4: Cell specific test parameters for E-UTRA cell 2

Parameter	Unit	Cell 2		
		T1	T2	T3
E-UTRA RF Channel number		1		
$BW_{channel}$	MHz	10		
OCNG Patterns defined in TS 36.133 [15] clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6		
PBCH_RA	dB	0		
PBCH_RB	dB			

PSS_RA	dB			
SSS_RA	dB			
PCFICH_RB	dB			
PHICH_RA	dB			
PHICH_RB	dB			
PDCCH_RA	dB			
PDCCH_RB	dB			
PDSCH_RA	dB			
PDSCH_RB	dB			
OCNG_RA Note 1	dB			
OCNG_RB Note 1	dB			
Qrxlevmin	dBm	-140		
N_{oc}	dBm/15 kHz	-98		
RSRP	dBm/15 KHz	-infinity	-86	-102
$\hat{E}_s / I_{ot}$	dB	-infinity	12	-4
$\hat{E}_s / N_{oc}$	dB	-infinity	12	-4
$Treselection_{EUTRAN}$	S	0		
SnonintrasearchP	dB	Not sent		
$Thresh_{x, highP}$	dB	48		
$Thresh_{serving, lowP}$	dB	44		
$Thresh_{x, lowP}$ (Note 2)	dB	50		
Propagation Condition		AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: This refers to the value of $Thresh_{x, Low}$ which is included in E-UTRA system information, and is a threshold for the NR target cell

A.16.1.2.2.3 Test Requirements

The cell reselection delay to a higher priority E-UTRAN cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a higher priority cell shall be less than 68 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a higher priority cell can be expressed as: $T_{higher_priority_search_RedCap}$ + $T_{evaluate, E\text{-}UTRAN_RedCap}$ + $T_{SI\text{-}E\text{-}UTRA}$,

Where:

$T_{higher_priority_search_RedCap}$ See clause 4.2B.2.7

$T_{evaluate, E\text{-}UTRAN_RedCap}$ See Table 4.2B.2.5-1 in clause 4.2B.2.5

$T_{SI\text{-}E\text{-}UTRA_}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 67.68 s, allow 68 s for the cell re-selection delay to a higher priority E-UTRAN cell.

A.16.1.2.3 Cell reselection to lower priority E-UTRAN for 1RX

A.16.1.2.3.1 Test Purpose and Environment

This test is to verify the requirement for the NR to E-UTRAN inter-RAT cell reselection requirements specified in clause 4.2B.2.5 when the E-UTRAN cell is of lower priority.

A. 16.1.2.3.2 Test Parameters

The test scenario comprises of one NR cell and one E-UTRAN cell as given in tables A16.1.2.3.2-1, A16.1.2.3.2-2, A16.1.2.3.2-3 and A16.1.2.3.2-4. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both NR cell 1 and E-UTRAN cell 2 are already identified by the UE prior to the start of the test. E-UTRAN cell 2 is of lower priority than cell 1.

Table A.16.1.2.3.2-1: Supported test configurations

Configuration	Description of serving cell	Description of target cell
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.16.1.2.3.2-2: General test parameters for NR to E-UTRAN cell re-selection test case

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	The UE camps on cell 1 in the initial phase.
	Neighbour cell		1, 2, 3, 4, 5, 6, 7, 8	Cell2	
T1 end condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell2	The UE shall perform reselection to cell 2 during T1.
	Neighbour cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	
T2 end condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	The UE shall perform reselection to cell 1 during T2 for iteration of the tests.
	Neighbour cell		1, 2, 3, 4, 5, 6, 7, 8	Cell2	
Access Barring Information		-	1, 2, 3, 4, 5, 6, 7, 8	Not Sent	No additional delays in random access procedure.
DRX cycle length		s	1, 2, 3, 4, 5, 6, 7, 8	1.28	The value shall be used for all cells in the test.
NR PRACH configuration index			1, 2, 3, 4, 5, 6, 7, 8	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
E-UTRAN PRACH configuration index			1, 2, 3, 7	534	As specified in table 5.7.1-2 in TS 36.211 [23]
			4, 5, 6, 8		

T1	s	1, 2, 3, 4, 5, 6, 7, 8	15	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2	s	1, 2, 3, 4, 5, 6, 7, 8	75	T2 needs to be defined so that cell re-selection reaction time is taken into account.

Table A. 16.1.2.3.2-3: Cell specific test parameters for NR cell 1

Parameter	Unit	Test configuration	Cell 1	
			T1	T2
TDD configuration		1, 4, 7, 8	N/A	
		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	
PDSCH RMC configuration		1, 4, 7, 8	SR.1.1 FDD	
		2, 5	SR.1.1 TDD	
		3, 6	SR.2.1 TDD	
RMSI CORESET RMC configuration		1, 4, 7, 8	CR.1.1 FDD	
		2, 5	CR.1.1 TDD	
		3, 6	CR.2.1 TDD	
Dedicated CORESET RMC configuration		1, 4, 7, 8	CCR.1.1 FDD	
		2, 5	CCR.1.1 TDD	
		3, 6	CCR.2.1 TDD	
SSB configuration		1, 4, 7, 8	SSB.1 FR1	
		2, 5	SSB.1 FR1	
		3, 6	SSB.1 RedCap FR1	
SMTC configuration		1, 4, 7, 8	SMTC.2	
		2, 5	SMTC.1	
		3, 6	SMTC.1	
OCNG Pattern		1, 2, 3, 4, 5, 6, 7, 8	OP.1 defined in A.3.2.1	
Initial DL BWP configuration		1, 2, 3, 4, 5, 6, 7, 8	DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3, 4, 5, 6, 7, 8	ULBWP.0.1	
RLM-RS		1, 2, 3, 4, 5, 6, 7, 8	SSB	
Qrxlevmin	dBm/SCS	1, 2, 4, 5	-140	
		3, 6	-137	
N_{oc}	dBm/SCS	1, 4, 7, 8	-98	
		2, 5	-98	
		3, 6	-95	
N_{oc}	dBm/15 kHz	1, 2, 3, 4, 5, 6, 7, 8	-98	
SS-RSRP	dBm/SCS	1, 4, 7, 8	-102	-86
		2, 5	-102	-86
		3, 6	-99	-83
$\hat{E}_s / I_{ot}$	dB	1, 4, 7, 8	-4	12
		2, 5		
		3, 6		
$\hat{E}_s / N_{oc}$	dB	1, 4, 7, 8	-4	12
		2, 5		
		3, 6		
Io	dBm/9.36 MHz	1, 4, 7, 8	-68.60	-57.78
	dBm/9.36 MHz	2, 5	-68.60	-57.78
	dBm/18.36 MHz	3, 6	-65.67	-54.85
Treselection	S	1, 2, 3, 4, 5, 6, 7, 8	0	
SnonintrasearchP	dB	1, 2, 3, 4, 5, 6, 7, 8	Not sent	
$Thresh_{x, highP}$	dB	1, 2, 3, 4, 5, 6, 7, 8	48	
$Thresh_{serving, lowP}$	dB	1, 2, 3, 4, 5, 6, 7, 8	44	
$Thresh_{x, lowP (Note 2)}$	dB	1, 2, 3, 4, 5, 6, 7, 8	50	

Propagation Condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: This refers to the value of $Thresh_{x, high}$ which is included in NR system information, and is a threshold for the E-UTRA target cell			

Table A.16.1.2.3.2-4: Cell specific test parameters for E-UTRA cell 2

Parameter	Unit	Cell 2	
		T1	T2
E-UTRA RF Channel number		1	
$BW_{channel}$	MHz	10	
OCNG Patterns defined in TS 36.133 [15] clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6	
PBCH_RA	dB	0	
PBCH_RB	dB		
PSS_RA	dB		
SSS_RA	dB		
PCFICH_RB	dB		
PHICH_RA	dB		
PHICH_RB	dB		
PDCCH_RA	dB		
PDCCH_RB	dB		
PDSCH_RA	dB		
PDSCH_RB	dB		
OCNG_RA Note 1	dB		
OCNG_RB Note 1	dB		
Qrxlevmin	dBm	-140	
N_{oc}	dBm/15 kHz	-98	
RSRP	dBm/15 KHz	-84	-84
$\hat{E}_s / I_{ot}$	dB	14	14
$\hat{E}_s / N_{oc}$	dB	14	14
$Treselection_{EUTRAN}$	S	0	
SnonintrasearchP	dB	Not sent	
$Thresh_{x, highP}$ (Note 2)	dB	48	
$Thresh_{serving, lowP}$	dB	44	
$Thresh_{x, lowP}$	dB	50	
Propagation Condition		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: This refers to the value of $Thresh_{x, high}$ which is included in E-UTRA system information, and is a threshold for the NR target cell			

A.16.1.2.3.3 Test Requirements

The cell reselection delay to a lower priority E-UTRAN cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a lower priority cell shall be less than 8 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a lower priority cell can be expressed as: $T_{evaluate, E-UTRAN} + T_{SI-E-UTRA}$,

Where:

$T_{higher_priority_search_RedCap}$ See clause 4.2B.2.7

$T_{evaluate, E-UTRAN_RedCap}$ See Table 4.2B.2.5-1 in clause 4.2B.2.5

$T_{SI-E-UTRA}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 7.68 s, allow 8 s for the cell re-selection delay to a lower priority E-UTRAN cell.

A.16.1.2.4 Cell reselection to lower priority E-UTRAN for 2RX

A.16.1.2.4.1 Test Purpose and Environment

This test is to verify the requirement for the NR to E-UTRAN inter-RAT cell reselection requirements specified in clause 4.2B.2.5 when the E-UTRAN cell is of lower priority.

A.16.1.2.4.2 Test Parameters

The test scenario comprises of one NR cell and one E-UTRAN cell as given in tables A16.1.2.4.2-1, A16.1.2.4.2-2, A16.1.2.4.2-3 and A16.1.2.4.2-4. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both NR cell 1 and E-UTRAN cell 2 are already identified by the UE prior to the start of the test. E-UTRAN cell 2 is of lower priority than cell 1.

Table A.16.1.2.4.2-1: Supported test configurations

Configuration	Description of serving cell	Description of target cell
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A. 16.1.2.4.2-2: General test parameters for NR to E-UTRAN cell re-selection test case

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	The UE camps on cell 1 in the initial phase.
	Neighbour cell		1, 2, 3, 4, 5, 6, 7, 8	Cell2	
T1 end condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell2	The UE shall perform reselection to cell 2 during T1.

	Neighbour cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	
T2 end condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	The UE shall perform reselection to cell 1 during T2 for iteration of the tests.
	Neighbour cell		1, 2, 3, 4, 5, 6, 7, 8	Cell2	
Access Barring Information		-	1, 2, 3, 4, 5, 6, 7, 8	Not Sent	No additional delays in random access procedure.
DRX cycle length		s	1, 2, 3, 4, 5, 6, 7, 8	1.28	The value shall be used for all cells in the test.
NR PRACH configuration index			1, 2, 3, 4, 5, 6, 7, 8	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
E-UTRAN PRACH configuration index			1, 2, 3, 7	534	As specified in table 5.7.1-2 in TS 36.211 [23]
			4, 5, 6, 8		
T1		s	1, 2, 3, 4, 5, 6, 7, 8	15	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2		s	1, 2, 3, 4, 5, 6, 7, 8	75	T2 needs to be defined so that cell re-selection reaction time is taken into account.

Table A. 16.1.2.4.2-3: Cell specific test parameters for NR cell 1

Parameter	Unit	Test configuration	Cell 1	
			T1	T2
TDD configuration		1, 4, 7, 8	N/A	
		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	
PDSCH RMC configuration		1, 4, 7, 8	SR.1.1 FDD	
		2, 5	SR.1.1 TDD	
		3, 6	SR.2.1 TDD	
RMSI CORESET RMC configuration		1, 4, 7, 8	CR.1.1 FDD	
		2, 5	CR.1.1 TDD	
		3, 6	CR.2.1 TDD	
Dedicated CORESET RMC configuration		1, 4, 7, 8	CCR.1.1 FDD	
		2, 5	CCR.1.1 TDD	
		3, 6	CCR.2.1 TDD	
SSB configuration		1, 4, 7, 8	SSB.1 FR1	
		2, 5	SSB.1 FR1	
		3, 6	SSB.1 RedCap FR1	
SMTC configuration		1, 4, 7, 8	SMTC.2	
		2, 5	SMTC.1	
		3, 6	SMTC.1	
OCNG Pattern		1, 2, 3, 4, 5, 6, 7, 8	OP.1 defined in A.3.2.1	
Initial DL BWP configuration		1, 2, 3, 4, 5, 6, 7, 8	DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3, 4, 5, 6, 7, 8	ULBWP.0.1	
RLM-RS		1, 2, 3, 4, 5, 6, 7, 8	SSB	
Qrxlevmin	dBm/SCS	1, 2, 4, 5	-140	
		3, 6	-137	
N_{oc}	dBm/SCS	1, 4	-98	
		2, 5	-98	
		3, 6	-95	
N_{oc}	dBm/15 kHz	1, 2, 3, 4, 5, 6, 7, 8	-98	
SS-RSRP	dBm/SCS	1, 4, 7, 8	-102	-86
		2, 5	-102	-86
		3, 6	-99	-83

$\hat{E}_s/I_{ot}$	dB	1, 4, 7, 8	-4	12
		2, 5		
		3, 6		
$\hat{E}_s/N_{oc}$	dB	1, 4, 7, 8	-4	12
		2, 5		
		3, 6		
Io	dBm/9.36 MHz	1, 4, 7, 8	-68.60	-57.78
	dBm/9.36 MHz	2, 5	-68.60	-57.78
	dBm/18.36 MHz	3, 6	-65.67	-54.85
Treselection	S	1, 2, 3, 4, 5, 6, 7, 8	0	
SnonintrasearchP	dB	1, 2, 3, 4, 5, 6, 7, 8	Not sent	
$Thresh_{x, highP}$	dB	1, 2, 3, 4, 5, 6, 7, 8	48	
$Thresh_{serving, lowP}$	dB	1, 2, 3, 4, 5, 6, 7, 8	44	
$Thresh_{x, lowP (Note 2)}$	dB	1, 2, 3, 4, 5, 6, 7, 8	50	
Propagation Condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: This refers to the value of $Thresh_{x, high}$ which is included in NR system information, and is a threshold for the E-UTRA target cell				

Table A. 16.1.2.4.2-4: Cell specific test parameters for E-UTRA cell 2

Parameter	Unit	Cell 2	
		T1	T2
E-UTRA RF Channel number		1	
$BW_{channel}$	MHz	10	
OCNG Patterns defined in TS 36.133 [15] clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6	
PBCH_RA	dB	0	
PBCH_RB	dB		
PSS_RA	dB		
SSS_RA	dB		
PCFICH_RB	dB		
PHICH_RA	dB		
PHICH_RB	dB		
PDCCH_RA	dB		
PDCCH_RB	dB		
PDSCH_RA	dB		
PDSCH_RB	dB		
$OCNG_RA^{Note 1}$	dB		
$OCNG_RB^{Note 1}$	dB		
Qrxlevmin	dBm	-140	
N_{oc}	dBm/15 kHz	-98	
RSRP	dBm/15 KHz	-84	-84
$\hat{E}_s/I_{ot}$	dB	14	14
$\hat{E}_s/N_{oc}$	dB	14	14
$Treselection_{EUTRAN}$	S	0	
SnonintrasearchP	dB	Not sent	
$Thresh_{x, highP (Note 2)}$	dB	48	
$Thresh_{serving, lowP}$	dB	44	
$Thresh_{x, lowP}$	dB	50	
Propagation Condition		AWGN	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	This refers to the value of $Thresh_{x, high}$ which is included in E-UTRA system information, and is a threshold for the NR target cell

A.16.1.3.1.3 Test Requirements

The cell reselection delay to a lower priority E-UTRAN cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a lower priority cell shall be less than 8 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a lower priority cell can be expressed as: $T_{evaluate, E\text{-}UTRAN} + T_{SI\text{-}E\text{-}UTRA}$,

Where:

$T_{higher_priority_search_RedCap}$ See clause 4.2B.2.7

$T_{evaluate, E\text{-}UTRAN_RedCap}$ See Table 4.2B.2.5-1 in clause 4.2B.2.5

$T_{SI\text{-}E\text{-}UTRA}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 7.68 s, allow 8 s for the cell re-selection delay to a lower priority E-UTRAN cell.

A.16.1.2.5 Cell reselection to lower priority E-UTRAN for UE fulfilling stationary relaxed measurement criterion for 1 Rx UE

A.16.1.2.5.1 Test Purpose and Environment

This test is to verify the requirement for the NR to E-UTRAN inter-RAT cell reselection when UE fulfills the stationary relaxed measurement criterion specified in clause 4.2B.2.11.2 and the E-UTRAN cell is of lower priority.

A.16.1.2.5.2 Test Parameters

The test scenario comprises of one NR cell and one E-UTRAN cell as given in tables A.16.1.2.5.2-1, A.16.1.2.5.2-2, A.16.1.2.5.2-3 and A.16.1.2.5.2-4. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both NR cell 1 and E-UTRAN cell 2 are already identified by the UE prior to the start of the test. E-UTRAN cell 2 is of lower priority than cell 1.

As specified in the Test Purpose, the UE is configured with the stationary relaxed measurement criterion defined in clause 5.2.4.9.1 in [1]. So, Cell 1 configures the UE as follows:

- *stationaryMobilityEvaluation* [2] criterion is configured according to the parameters listed in Table A.16.1.1.8.2-3;
- *cellEdgeEvaluationWhileStationary* [2] criterion is not configured;
- *combineRelaxedMeasCondition2* [2] is not configured;

Table A.16.1.2.5.2-1: Supported test configurations

Configuration	Description of serving cell	Description of target cell
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.16.1.2.5.2-2: General test parameters for NR to E-UTRAN cell re-selection test case for UE fulfilling stationary criterion for 1 Rx UE

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	The UE camps on cell 1 in the initial phase, it fulfills stationary criterion, and during T1 period the UE reselects to cell 2
	Neighbour cells		1, 2, 3, 4, 5, 6, 7, 8	Cell2	
T1 end condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell2	The UE shall perform reselection to cell 2 during T1
	Neighbour cells		1, 2, 3, 4, 5, 6, 7, 8	Cell1	
T2 end condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	The UE shall perform reselection to cell 1 with higher priority during T2 for iteration of the tests.
	Neighbour cells		1, 2, 3, 4, 5, 6, 7, 8	Cell2	
Access Barring Information		-	1, 2, 3, 4, 5, 6, 7, 8	Not Sent	No additional delays in random access procedure.
DRX cycle length		s	1, 2, 3, 4, 5, 6, 7, 8	0.64	The value shall be used for all cells in the test.
NR PRACH configuration index			1, 2, 3, 4, 5, 6, 7, 8	TBD	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
E-UTRAN PRACH configuration index			1, 2, 3, 7, 8	53	As specified in table 5.7.1-2 in TS 36.211 [23]
			4, 5, 6	4	
T1		s	1, 2, 3, 4, 5, 6, 7, 8	24	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2		s	1, 2, 3, 4, 5, 6, 7, 8	24	T2 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.16.1.2.5.2-3: Cell specific test parameters for NR cell 1 for 1 Rx UE

Parameter	Unit	Test configuration	Cell 1	
			T1	T2
TDD configuration		1, 4,7, 8	N/A	
		2, 5	TDDConf.1.1	

		3, 6	TDDConf.2.1	
PDSCH RMC configuration		1, 4, 8	SR.1.1 FDD	
		2, 5	SR.1.1 TDD	
		3, 6	SR.2.1 TDD	
RMSI CORESET RMC configuration		1, 4, 8	CR.1.1 FDD	
		2, 5	CR.1.1 TDD	
		3, 6	CR.2.1 TDD	
Dedicated CORESET RMC configuration		1, 4, 8	CCR.1.1 FDD	
		2, 5	CCR.1.1 TDD	
		3, 6	CCR.2.1 TDD	
SSB configuration		1, 4, 8	SSB.1 FR1	
		2, 5	SSB.1 FR1	
		3, 6	SSB.1 RedCap FR1	
SMTC configuration		1, 4, 8	SMTC.2	
		2, 5	SMTC.1	
		3, 6	SMTC.1	
OCNG Pattern		1, 2, 3, 4, 5, 6, 7, 8	OP.1 defined in A.3.2.1	
Initial DL BWP configuration		1, 2, 3, 4, 5, 6, 7, 8	DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3, 4, 5, 6, 7, 8	ULBWP.0.1	
RLM-RS		1, 2, 3, 4, 5, 6, 7, 8	SSB	
Qrxlevmin	dBm/SCS	1, 2, 4, 5	-140	
		3, 6	-137	
N_{oc}	dBm/SCS	1, 4, 8	-98	
		2, 5	-98	
		3, 6	-95	
N_{oc}	dBm/15 kHz	1, 2, 3, 4, 5, 6, 7, 8	-98	
SS-RSRP	dBm/SCS	1, 4, 8	-102	-86
		2, 5	-102	-86
		3, 6	-99	-83
$\hat{E}_s / I_{ot}$	dB	1, 4, 8	-4	12
		2, 5		
		3, 6		
$\hat{E}_s / N_{oc}$	dB	1, 4, 8	-4	12
		2, 5		
		3, 6		
Io	dBm/9.36 MHz	1, 4, 8	-68.60	-57.78
	dBm/9.36 MHz	2, 5	-68.60	-57.78
	dBm/18.36 MHz	3, 6	-65.67	-54.85
TreselectionP	S	1, 2, 3, 4, 5, 6, 7, 8	0	
Snonintrasearch	dB	1, 2, 3, 4, 5, 6, 7, 8	50	
$Thresh_{x, highP}$	dB	1, 2, 3, 4, 5, 6, 7, 8	48	
$Thresh_{serving, lowP}$	dB	1, 2, 3, 4, 5, 6, 7, 8	44	
$Thresh_{x, lowP (Note 2)}$	dB	1, 2, 3, 4, 5, 6, 7, 8	50	
$S_{SearchDeltaP-Stationary}$	dB	1, 2, 3, 4, 5, 6, 7, 8	3	
$T_{SearchDeltaP-Stationary}$	s	1, 2, 3, 4, 5, 6, 7, 8	5	
Propagation Condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: This refers to the value of $Thresh_{x, low}$ which is included in NR system information, and is a threshold for the E-UTRA target cell

Table A.16.1.2.5.2-4: Cell specific test parameters for E-UTRA cell 2 for 1 Rx UE

Parameter	Unit	Cell 2	
		T1	T2

E-UTRA RF Channel number		1	
$BW_{channel}$	MHz	10	
OCNG Patterns defined in TS 36.133 [15] clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6	
PBCH_RA	dB	0	
PBCH_RB	dB		
PSS_RA	dB		
SSS_RA	dB		
PCFICH_RB	dB		
PHICH_RA	dB		
PHICH_RB	dB		
PDCCH_RA	dB		
PDCCH_RB	dB		
PDSCH_RA	dB		
PDSCH_RB	dB		
OCNG_RA Note 1	dB		
OCNG_RB Note 1	dB		
Qrxlevmin	dBm	-140	
N_{oc}	dBm/15 kHz	-98	
RSRP	dBm/15 KHz	-84	-84
$\hat{E}_s / I_{ot}$	dB	14	14
$\hat{E}_s / N_{oc}$	dB	14	14
$Treselection_{EUTRAN}$	S	0	
Snonintrasearch	dB	Not sent	
$Thresh_{x, high}$ (Note 2)	dB	48	
$Thresh_{serving, low}$	dB	44	
$Thresh_{x, low}$	dB	50	
Propagation Condition		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: This refers to the value of $Thresh_{x, high}$ which is included in E-UTRA system information, and is a threshold for the NR target cell			

A.16.1.2.5.3 Test Requirements

The cell reselection delay to a lower priority E-UTRAN cell with UE fulfilling stationary relaxed measurement criterion is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the *RRCConnectionRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a lower priority cell shall be less than 32 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a lower priority cell can be expressed as: $T_{evaluate,EUTRAN_Relax} + T_{SI\text{-}E\text{-}UTRA}$,

Where:

$T_{evaluate,EUTRAN_Relax}$ See Table 4.2B.2.11.2-1 in clause 4.2B.2.11.2

$T_{SI\text{-}E\text{-}UTRA}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 30.72 ($T_{evaluate,EUTRAN_Relax}$) + 1.28 ($T_{SI-E-UTRA}$) = 32 s for the cell re-selection delay to a lower priority E-UTRAN cell for stationary relaxed measurement criterion.

A.16.1.2.6 Cell reselection to lower priority E-UTRAN for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE

A.16.1.2.6.1 Test Purpose and Environment

This test is to verify the requirement for the NR to E-UTRAN inter-RAT cell reselection when UE fulfills the stationary relaxed measurement criterion specified in clause 4.2B.2.11.2 and the E-UTRAN cell is of lower priority.

A.16.1.2.6.2 Test Parameters

The test scenario comprises of one NR cell and one E-UTRAN cell as given in tables A.16.1.2.6.2-1, A.16.1.2.6.2-2, A.16.1.2.6.2-3 and A.16.1.2.6.2-4. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both NR cell 1 and E-UTRAN cell 2 are already identified by the UE prior to the start of the test. E-UTRAN cell 2 is of lower priority than cell 1.

As specified in the Test Purpose, the UE is configured with the stationary relaxed measurement criterion defined in clause 5.2.4.9.1 in [1]. So, Cell 1 configures the UE as follows:

- *stationaryMobilityEvaluation* [2] criterion is configured according to the parameters listed in Table A.16.1.1.8.2-3;
- *cellEdgeEvaluationWhileStationary* [2] criterion is not configured;
- *combineRelaxedMeasCondition2* [2] is not configured;

Table A.16.1.2.6.2-1: Supported test configurations

Configuration	Description of serving cell	Description of target cell
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.16.1.2.6.2-2: General test parameters for NR to E-UTRAN cell re-selection test case for UE fulfilling stationary criterion for 2 Rx UE

Parameter	Unit	Test configuration	Value	Comment

Initial condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	The UE camps on cell 1 in the initial phase, it fulfills stationary criterion, and during T1 period the UE reselects to cell 2
	Neighbour cells		1, 2, 3, 4, 5, 6, 7, 8	Cell2	
T1 end condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell2	The UE shall perform reselection to cell 2 during T1
	Neighbour cells		1, 2, 3, 4, 5, 6, 7, 8	Cell1	
T2 end condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	The UE shall perform reselection to cell 1 with higher priority during T2 for iteration of the tests.
	Neighbour cells		1, 2, 3, 4, 5, 6, 7, 8	Cell2	
Access Barring Information		-	1, 2, 3, 4, 5, 6, 7, 8	Not Sent	No additional delays in random access procedure.
DRX cycle length		s	1, 2, 3, 4, 5, 6, 7, 8	0.64	The value shall be used for all cells in the test.
NR PRACH configuration index			1, 2, 3, 4, 5, 6, 7, 8	TBD	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
E-UTRAN PRACH configuration index			1, 2, 3, 7	53	As specified in table 5.7.1-2 in TS 36.211 [23]
			4, 5, 6, 8	4	
T1		s	1, 2, 3, 4, 5, 6, 7, 8	24	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2		s	1, 2, 3, 4, 5, 6, 7, 8	24	T2 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.16.1.2.6.2-3: Cell specific test parameters for NR cell 1 for 2 Rx UE

Parameter	Unit	Test configuration	Cell 1	
			T1	T2
TDD configuration		1, 4, 7, 8	N/A	
		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	
PDSCH RMC configuration		1, 4, 7, 8	SR.1.1 FDD	
		2, 5	SR.1.1 TDD	
		3, 6	SR.2.1 TDD	
RMSI CORESET RMC configuration		1, 4, 7, 8	CR.1.1 FDD	
		2, 5	CR.1.1 TDD	
		3, 6	CR.2.1 TDD	
Dedicated CORESET RMC configuration		1, 4, 7, 8	CCR.1.1 FDD	
		2, 5	CCR.1.1 TDD	
		3, 6	CCR.2.1 TDD	
SSB configuration		1, 4, 7, 8	SSB.1 FR1	
		2, 5	SSB.1 FR1	
		3, 6	SSB.2 FR1	
SMTC configuration		1, 4, 7, 8	SMTC.2	
		2, 5	SMTC.1	
		3, 6	SSB.1 RedCap FR1	
OCNG Pattern		1, 2, 3, 4, 5, 6, 7, 8	OP.1 defined in A.3.2.1	
Initial DL BWP configuration		1, 2, 3, 4, 5, 6, 7, 8	DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3, 4, 5, 6, 7, 8	ULBWP.0.1	
RLM-RS		1, 2, 3, 4, 5, 6, 7, 8	SSB	
Qrxlevmin	dBm/SCS	1, 2, 4, 5	-140	
		3, 6	-137	
N_{oc}	dBm/SCS	1, 4, 7, 8	-98	
		2, 5	-98	
		3, 6	-95	

N_{oc}	dBm/15 kHz	1, 2, 3, 4, 5, 6, 7, 8	-98	
SS-RSRP	dBm/SCS	1, 4, 7, 8	-102	-86
		2, 5	-102	-86
		3, 6	-99	-83
$\hat{E}_s/I_{ot}$	dB	1, 4, 7, 8	-4	12
		2, 5		
		3, 6		
$\hat{E}_s/N_{oc}$	dB	1, 4, 7, 8	-4	12
		2, 5		
		3, 6		
Io	dBm/9.36 MHz	1, 4, 7, 8	-68.60	-57.78
	dBm/9.36 MHz	2, 5	-68.60	-57.78
	dBm/18.36 MHz	3, 6	-65.67	-54.85
TreselectionP	S	1, 2, 3, 4, 5, 6, 7, 8	0	
Snonintrasearch	dB	1, 2, 3, 4, 5, 6, 7, 8	50	
$Thresh_{x, highP}$	dB	1, 2, 3, 4, 5, 6, 7, 8	48	
$Thresh_{serving, lowP}$	dB	1, 2, 3, 4, 5, 6, 7, 8	44	
$Thresh_{x, lowP (Note 2)}$	dB	1, 2, 3, 4, 5, 6, 7, 8	50	
$S_{SearchDeltaP-Stationary}$	dB	1, 2, 3, 4, 5, 6, 7, 8	3	
$T_{SearchDeltaP-Stationary}$	s	1, 2, 3, 4, 5, 6, 7, 8	5	
Propagation Condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: This refers to the value of $Thresh_{x, low}$ which is included in NR system information, and is a threshold for the E-UTRA target cell

Table A.16.1.2.6.2-4: Cell specific test parameters for E-UTRA cell 2 for 2 Rx UE

Parameter	Unit	Cell 2	
		T1	T2
E-UTRA RF Channel number		1	
$BW_{channel}$	MHz	10	
OCNG Patterns defined in TS 36.133 [15] clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6	
PBCH_RA	dB	0	
PBCH_RB	dB		
PSS_RA	dB		
SSS_RA	dB		
PCFICH_RB	dB		
PHICH_RA	dB		
PHICH_RB	dB		
PDCCH_RA	dB		
PDCCH_RB	dB		
PDSCH_RA	dB		
PDSCH_RB	dB		
OCNG_RA[Note 1]	dB		
OCNG_RB[Note 1]	dB		
Qrxlevmin	dBm	-140	
N_{oc}	dBm/15 kHz	-98	
RSRP	dBm/15 KHz	-84	-84
$\hat{E}_s/I_{ot}$	dB	14	14
$\hat{E}_s/N_{oc}$	dB	14	14

$Treselection_{EUTRAN}$	S	0
Snonintrasearch	dB	Not sent
$Thresh_{x, high (Note 2)}$	dB	48
$Thresh_{serving, low}$	dB	44
$Thresh_{x, low}$	dB	50
Propagation Condition		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: This refers to the value of $Thresh_{x, high}$ which is included in E-UTRA system information, and is a threshold for the NR target cell		

A.16.1.2.6.3 Test Requirements

The cell reselection delay to a lower priority E-UTRAN cell with UE fulfilling stationary relaxed measurement criterion is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the *RRCConnectionRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a lower priority cell shall be less than 32 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a lower priority cell can be expressed as: $T_{evaluate,EUTRAN_Relax} + T_{SI\text{-}E\text{-}UTRA}$,

Where:

$T_{evaluate,EUTRAN_Relax}$ See Table 4.2B.2.11.2-1 in clause 4.2B.2.11.2

$T_{SI\text{-}E\text{-}UTRA}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 30.72 ($T_{evaluate,EUTRAN_Relax}$) + 1.28 ($T_{SI\text{-}E\text{-}UTRA}$) = 32 s for the cell re-selection delay to a lower priority E-UTRAN cell for stationary relaxed measurement criterion.

A.16.2 SA: RRC_INACTIVE state mobility for RedCap

A.16.2.1 Configured Grant based Small Data Transmissions (CG-SDT) for RedCap

Editor's Note: the contents in the clause will be updated based on further agreement on the RedCap specific test configurations and the updates from latest FR1 SDT CR in R4-2220716.

A.16.2.1.1 NR UE CG-SDT Test in FR1 for 1Rx RedCap UE

A.16.2.1.1.1 Test purpose and Environment

The purpose of this test is to verify that the UE properly perform TA validation for CG-SDT transmission in clause 5.2B.2.1. In the test, UE is configured two CG-SDT configurations at different time. The test consists of 5 successive time periods, with time duration of T1, T2, T3, T4, and T5 respectively. There is one cell, which is the active NR cell in FR1. Figure A.16.2.1.1.1-1 shows the variation of the RSRP per time. Prior to the time point TA, the UE shall be fully synchronized to PCell (Cell 1).

Before starting the test at time point TA, test equipment configures RSRP to P0.

At time point TB, RSRP is changed from P0 to P1.

At time point TC, UE expect to receive RRC release with CG-SDT configuration and RRC status is changed to INACTIVE status.

At time point TD, RSRP is changed from P1 to P0.

At time point TE, RSRP is changed from P0 to P2.

Test equipment triggers UL data arrival at UE lower layer at time point TF.

At time point TH, UE expect to receive a RRC release with CG-SDT configurations.

At time point TI, RSRP is changed from P2 to P3.

Test equipment triggers UL data arrival at UE lower layer at time point TJ.

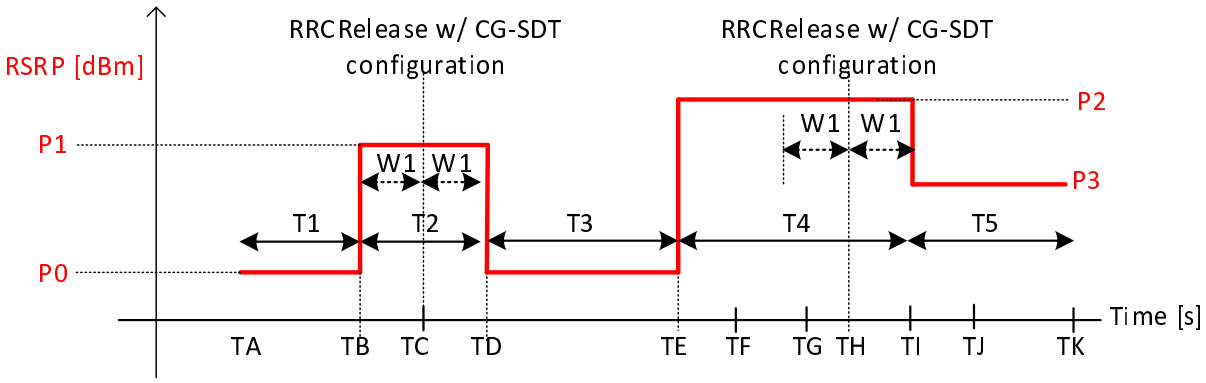

Figure A.16.2.1.1.1-1: RSRP variation model for CG-SDT testing

A.16.2.1.1.2 Test Parameters

Supported test configurations are shown in Table A.16.2.1.1.2-1. The test parameters for the PCell are given in Table A.16.2.1.1.2-2 and Table A.16.2.1.1.2-3.

Table A.16.2.1.1.2-1: NR configuration for FR1 SSB

Config	Description
1	NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NR TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
3	NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 20 MHz
4	NR HD-FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.2.1.1.2-2: General test parameters

Parameter		Unit	Value	Comment
Duplex mode	Config 1		FDD	
	Config 2, 3		TDD	
	Config 4		HD-FDD	
TDD Configuration	Config 1		N/A	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
	Config 4		N/A	

$BW_{channel}$	Config 1, 2, 4	MHz	10: $N_{RB,c}$ = 52	
	Config 3		20: $N_{RB,c}$ = 51	
PDSCH Reference measurement channel	Config 1, 4		SR.1.1 FDD	
	Config 2		SR.1.1 TDD	
	Config 3		SR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1, 4		CCR.1.3 FDD	
	Config 2		CCR.1.3 TDD	
	Config 3		CCR.2.2 TDD	
SSB configuration	Config 1		SSB.3 FR1	
	Config 2, 4		SSB.1 FR1	
	Config 3		SSB. 1 RedCap FR1	
OCNG Patterns			OP.1	
Initial BWP Configuration	Config 1, 2, 3, 4		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration	Config 1, 2, 3, 4		DLBWP.1.1 ULBWP.1.1	
SMTC configuration	Config 1, 2, 4		SMTC.1	
	Config 3		SMTC.1	
DRX configuration	Config 1, 2, 3, 4		DRX.7	
T1	Config 1, 2, 3, 4	s	[1]	
T2	Config 1, 2, 3, 4	s	[1.28]	
T3	Config 1, 2, 3, 4	s	[2.36]	
T4	Config 1, 2, 3, 4	s	[2.56]	
T5	Config 1, 2, 3, 4	s	[2.36]	
cg-SDT-RSRP-ChangeThreshold	Config 1, 2, 3, 4	dB	[8]	
cg-SDT-TimeAlignmentTime	Config 1, 2, 3, 4		infinity	
CG-SDT resource period	Config 1, 2, 3, 4	ms	[640ms]	configuredGrantConfig Peridocity at 38.331 Config 1, 2, 4 : sym640x14, config 3 : sym1024x14
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS				
EPRE ratio of OCNG to OCNG DMRS				
Propagation condition	Config 1, 2, 3, 4		AWGN	

Table A.16.2.1.1.2-3: SSB specific test parameters

Parameter	Config	Unit	SSB#0				
			T1	T2	T3	T4	T5
N_{oc} Note1	1, 2, 3, 4	dBm/15kHz	[-98]				
N_{oc} Note1	1, 2, 4	dBm/SSB SCS	[-98]				
	3	dBm/SSB SCS	[-95]				
$\hat{E}_s/I_{ot}$	1, 2, 3, 4	dB	[0]	[10.35]	[0]	[15.25]	[6]
SS RSRP Note2	1, 2, 4	dBm/SSB SCS	[-98]	[-87.65]	[-98]	[-82.75]	[-92]
	3	dBm/SSB SCS	[-95]	[-84.65]	[-95]	[-79.75]	[-89]
Io Note2	1, 2, 4	dBm/ 9.36 MHz	[-67.04]	[-59.31]	[-67.04]	[-54.67]	[-63.07]
	3	dBm/ 18.36 MHz	[-67.12]	[-59.40]	[-67.12]	[-54.75]	[-63.15]
$\hat{E}_s/N_{oc}$	1, 2, 3, 4	dB	[0]	[10.35]	[0]	[15.25]	[6]

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.16.2.1.1.3 Test requirements

The UE behaviour in each test during time durations shall be as follows:

During T4, UE shall transmit PUSCH at CG-SDT resource within 640ms + Z after time point TF.

During T5, UE shall not transmit PUSCH at CG-SDT resources after TJ until the end of the test at time point TK.

The rate of correct events observed during repeated tests shall be at least 90%.

A.16.2.1.2 NR UE CG-SDT Test in FR1 for 2Rx RedCap UE

A.16.2.1.2.1 Test purpose and Environment

The purpose of this test is to verify that the UE properly perform TA validation for CG-SDT transmission in clause 5.2B.2.1. In the test, UE is configured two CG-SDT configurations at different time. The test consists of 5 successive time periods, with time duration of T1, T2, T3, T4, and T5 repectively. There is one cell, which is the active cell in FR1. Figure A.16.2.1.1.1-1 shows the variation of the RSRP per time. Prior to the time point TA, the UE shall be fully synchronized to PCell (Cell 1).

Before starting the test at time point TA, test equipment configures RSRP to P0.

At time point TB, RSRP is changed from P0 to P1.

At time point TC, UE expect to receive RRC release with CG-SDT configuration and RRC status is changed to INACTIVE status.

At time point TD, RSRP is changed from P1 to P0.

At time point TE, RSRP is changed from P0 to P2.

Test equipment triggers UL data arrival at UE lower layer at time point TF.

At time point TH, UE expect to receive a RRC release with CG-SDT configurations.

At time point TI, RSRP is changed from P2 to P3.

Test equipment triggers UL data arrival at UE lower layer at time point TJ.

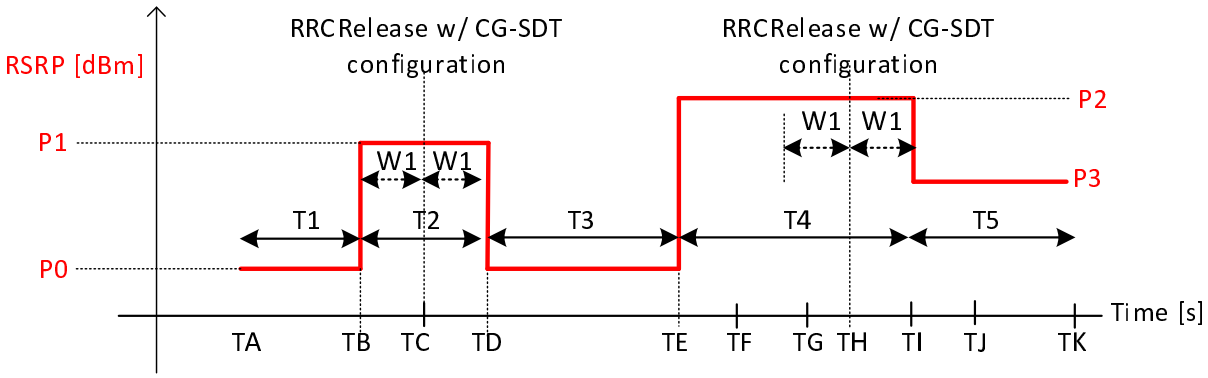

Figure A.16.2.1.2.1-1: RSRP variation model for CG-SDT testing

A.16.2.1.2.2 Test Parameters

Supported test configurations are shown in Table A.16.2.1.2.2-1. The test parameters for the PCell are given in Table A.16.2.1.2.2-2 and Table A.16.2.1.2.2-3.

Table A.16.2.1.2.2-1: NR configuration for FR1 SSB

Config	Description
1	NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NR TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
3	NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 20 MHz
4	NR HD-FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.2.1.2.2-2: General test parameters

Parameter		Unit	Value	Comment
Duplex mode	Config 1		FDD	
	Config 2, 3		TDD	
	Config 4		HD-FDD	
TDD Configuration	Config 1		N/A	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
	Config 4		N/A	
$BW_{channel}$	Config 1, 2, 4	MHz	10: $N_{RB,c}$ = 52	
	Config 3		20: $N_{RB,c}$ = 51	
PDSCH Reference measurement channel	Config 1, 4		SR.1.1 FDD	
	Config 2		SR.1.1 TDD	
	Config 3		SR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	

	Config 3		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1, 4		CCR.1.3 FDD	
	Config 2		CCR.1.3 TDD	
	Config 3		CCR.2.2 TDD	
SSB configuration	Config 1		SSB.3 FR1	
	Config 2, 4		SSB.1 FR1	
	Config 3		SSB. 1 RedCap FR1	
OCNG Patterns			OP.1	
Initial BWP Configuration	Config 1, 2, 3, 4		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration	Config 1, 2, 3, 4		DLBWP.1.1 ULBWP.1.1	
SMTC configuration	Config 1, 2, 4		SMTC.1	
	Config 3		SMTC.1	
DRX configuration	Config 1, 2, 3, 4		DRX.7	
T1	Config 1, 2, 3, 4	s	[1]	
T2	Config 1, 2, 3, 4	s	[1.28]	
T3	Config 1, 2, 3, 4	s	[2.36]	
T4	Config 1, 2, 3, 4	s	[2.56]	
T5	Config 1, 2, 3, 4	s	[2.36]	
cg-SDT-RSRP-ChangeThreshold	Config 1, 2, 3, 4	dB	[8]	
cg-SDT-TimeAlignmentTime			infinity	
CG-SDT resource period		ms	[640ms]	configuredGrantConfig Peridocity at 38.331 Config 1,2 : sym640x14, config 3 : sym1024x14
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS				
EPRE ratio of OCNG to OCNG DMRS				
Propagation condition	Config 1, 2, 3, 4		AWGN	

Table A.16.2.1.2.2-3: SSB specific test parameters

Parameter	Config	Unit	SSB#0				
			T1	T2	T3	T4	T5
N_{oc} Note1	1, 2, 3, 4	dBm/15kHz	[-98]				
N_{oc} Note1	1, 2, 4	dBm/SSB SCS	[-98]				
	3	dBm/SSB SCS	[-95]				

$\hat{E}_s/I_{ot}$	1, 2, 3, 4	dB	[0]	[10.35]	[0]	[15.25]	[6]
SS RSRP Note2	1, 2, 4	dBm/SSB SCS	[-98]	[-87.65]	[-98]	[-82.75]	[-92]
	3	dBm/SSB SCS	[-95]	[-84.65]	[-95]	[-79.75]	[-89]
Io Note2	1, 2, 4	dBm/ 9.36 MHz	[-67.04]	[-59.31]	[-67.04]	[-54.67]	[-63.07]
	3	dBm/ 18.36 MHz	[-67.12]	[-59.40]	[-67.12]	[-54.75]	[-63.15]
$\hat{E}_s/N_{oc}$	1, 2, 3, 4	dB	[0]	[10.35]	[0]	[15.25]	[6]
	Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
	Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.16.2.1.2.3 Test requirements

The UE behaviour in each test during time durations shall be as follows:

During T4, UE shall transmit PUSCH at CG-SDT resource within 640ms + Z after time point TF.

During T5, UE shall not transmit PUSCH at CG-SDT resources after TJ until the end of the test at time point TK.

The rate of correct events observed during repeated tests shall be at least 90%.

A.16.3 RRC_CONNECTED state mobility for RedCap

A.16.3.1 Handover

A.16.3.1.1 Intra-frequency handover from FR1 to FR1; known target cell for 1 Rx UE

A.16.3.1.1.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR1-NR FR1 intra frequency handover requirements or 1 Rx RedCap UE specified in clause 6.1D.1.2.

A.16.3.1.1.2 Test Parameters

Supported test configurations are shown in table A.16.3.1.1.2-1. Both handover delay and interruption length are tested by using the parameters in table A.16.3.1.1.2-2, and A.16.3.1.1.2-3.

The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE may not have any timing information of cell 2.

NR shall send a RRC message implying handover to cell 2, then UE handover to cell 2's initial BWP associated with CD-SSB. The RRC message implying handover shall be sent to the UE during period T2, after the UE has reported Event A3. T3 is defined as the end of the last TTI containing the RRC message implying handover.

Table A.16.3.1.1.2-1: Intra-frequency handover from FR1 to FR1 test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode

	Target cell: NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.3.1.1.2-2: General test parameters Intra-frequency handover from FR1 to FR1

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
A3-Offset		dB	0	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	≤5	
T3		s	1	

Table A.16.3.1.1.2-3: Cell specific test parameters for NR FR1-FR1 Intra frequency handover test case

Parameter		Unit	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
NR RF Channel Number			1			1		
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
	Config 4		HD-FDD					
TDD configuration	Config 1,4		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
$BW_{channel}$	Config 1,4	MHz	10: $N_{RB,c}$ = 52					
	Config 2		10: $N_{RB,c}$ = 52					
	Config 3		20: $N_{RB,c}$ = 51					
BWP BW	Config 1,4	MHz	10: $N_{RB,c}$ = 52					
	Config 2		10: $N_{RB,c}$ = 52					
	Config 3		20: $N_{RB,c}$ = 51					
DRx Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD					
	Config 2		SR.1.1 TDD					
	Config 3		SR2.1 TDD					
CORESET Reference Channel	Config 1,4		CR.1.1 FDD					
	Config 2		CR.1.1 TDD					
	Config 3		CR2.1 TDD					
TRS configuration	Config 1,4		TRS.1.1 FDD					
	Config 2		TRS.1.1 TDD					
	Config 3		TRS.1.2 TDD					
OCNG Patterns			OP.1					
SMTC Configuration			SMTC.1					
SSB Configuration	Config 1,2,4		SSB.1 FR1			SSB.1 FR1		
	Config 3		SSB.1 RedCap FR1			SSB.1 RedCap FR1		
PDSCH/PDCCH subcarrier spacing	Config 1,2,4	kHz	15 kHz					
	Config 3		30 kHz					

PUCCH/PUSCH subcarrier spacing	Config 1,2,4	kHz	15 kHz					
	Config 3		30 kHz					
PRACH configuration			FR1 PRACH configuration 1					
BWP configuration	Initial DL BWP		DLBWP.0.1					
	Dedicated DL BWP		DLBWP.1.1					
	Initial UL BWP		ULBWP.0.1					
	Dedicated UL BWP		ULBWP.1.1					
EPRE ratio of PSS to SSS		dB	0					
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} Note2		dBm/15kHz	-98					
N_{oc} Note2	Config 1,2,4	dBm/SCS	-98					
	Config 3		-95					
$\hat{E}_s / I_{ot}$		dB	8	-4.27	-4.27	-Infinity	3.36	3.36
$\hat{E}_s / N_{oc}$		dB	8	8	8	-Infinity	12	12
SSB_RP	Config 1,2,4	dBm/SCS	-90	-90	-90	-Infinity	-86	-86
	Config 3	dBm/SCS	-87	-87	-87	-Infinity	-83	-83
Io Note3	Config 1,2,4	dBm/ 9.36MHz	-61.41	-56.40	-56.40	-61.41	-56.40	-56.40
	Config 3	dBm/ 18.36MHz	-58.49	-53.49	-53.49	-58.49	-53.49	-53.49
Propagation condition		-	AWGN			AWGN		
Antenna Configuration			1x1					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.16.3.1.1.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 72 ms from the beginning of time period T3.
The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2].

$T_{interrupt}$ = 62 ms in the test. $T_{interrupt}$ is defined in clause 6.1D.1.2.

This gives a total of 72 ms.

A.16.3.1.2 Intra-frequency handover from FR1 to FR1; known target cell for 2 Rx UE

A.16.3.1.2.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR1-NR FR1 intra frequency handover requirements or 1 Rx RedCap UE specified in clause 6.1D.1.2.

A.16.3.1.2.2 Test Parameters

Supported test configurations are shown in table A.16.3.1.2.2-1. Both handover delay and interruption length are tested by using the parameters in table A.16.3.1.2.2-2, and A.16.3.1.2.2-3.

The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE may not have any timing information of cell 2.

NR shall send a RRC message implying handover to cell 2, then UE handover to cell 2's initial BWP associated with CD-SSB. The RRC message implying handover shall be sent to the UE during period T2, after the UE has reported Event A3. T3 is defined as the end of the last TTI containing the RRC message implying handover.

Table A.16.3.1.2.2-1: Intra-frequency handover from FR1 to FR1 test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.3.1.2.2-2: General test parameters Intra-frequency handover from FR1 to FR1

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
A3-Offset		dB	0	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	≤5	
T3		s	1	

Table A.16.3.1.2.2-3: Cell specific test parameters for NR FR1-FR1 Intra frequency handover test case

Parameter		Unit	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
NR RF Channel Number			1			1		
Duplex mode	Config 1		FDD					

	Config 2,3		TDD					
	Config 4							
TDD configuration	Config 1,4		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
$BW_{channel}$	Config 1,4	MHz	10: $N_{RB,c}$ = 52					
	Config 2		10: $N_{RB,c}$ = 52					
	Config 3		20: $N_{RB,c}$ = 51					
BWP BW	Config 1,4	MHz	10: $N_{RB,c}$ = 52					
	Config 2		10: $N_{RB,c}$ = 52					
	Config 3		20: $N_{RB,c}$ = 51					
DRx Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD					
	Config 2		SR.1.1 TDD					
	Config 3		SR2.1 TDD					
CORESET Reference Channel	Config 1,4		CR.1.1 FDD					
	Config 2		CR.1.1 TDD					
	Config 3		CR2.1 TDD					
TRS configuration	Config 1,4		TRS.1.1 FDD					
	Config 2		TRS.1.1 TDD					
	Config 3		TRS.1.2 TDD					
OCNG Patterns			OP.1					
SMTC Configuration			SMTC.1 RedCap					
SSB Configuration	Config 1,2,4		SSB.1 FR1			SSB.1 FR1		
	Config 3		SSB.1 RedCap FR1			SSB.1 RedCap FR1		
PDSCH/PDCCH subcarrier spacing	Config 1,2,4	kHz	15 kHz					
	Config 3		30 kHz					
PUCCH/PUSCH subcarrier spacing	Config 1,2,4	kHz	15 kHz					
	Config 3		30 kHz					
PRACH configuration			FR1 PRACH configuration 1					
BWP configuration	Initial DL BWP		DLBWP.0.1					
	Dedicated DL BWP		DLBWP.1.1					
	Initial UL BWP		ULBWP.0.1					
	Dedicated UL BWP		ULBWP.1.1					
EPRE ratio of PSS to SSS		dB	0					
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} Note2		dBm/15kHz	-98					
N_{oc} Note2	Config 1,2,4	dBm/SCS	-98					
	Config 3		-95					
$\hat{E}_s / I_{ot}$		dB	8	-3.3	-3.3	-Infinity	2.36	2.36
$\hat{E}_s / N_{oc}$		dB	8	8	8	-Infinity	11	11
SSB_RP	Config 1,2,4	dBm/SCS	-90	-90	-90	-Infinity	-87	-87

	Config 3	dBm/SCS	-87	-87	-87	- Infinity	-84	-84
Io[Note3]	Config 1,2,4	dBm/ 9.36MHz	-61.41	-57.06	-57.06	-61.41	-57.06	-57.06
	Config 3	dBm/ 18.36MHz	-58.49	-54.14	-54.14	-58.49	-54.14	-54.14
Propagation condition		-	AWGN			AWGN		
Antenna Configuration			1x2					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.16.3.1.2.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 72 ms from the beginning of time period T3.
The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2].

$T_{interrupt}$ = 62 ms in the test. $T_{interrupt}$ is defined in clause 6.1D.1.2.

This gives a total of 72 ms.

A.16.3.1.3 Intra-frequency handover from FR1 to FR1; unknown target cell for 1 Rx UE

A.16.3.1.3.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR1-NR FR1 intra frequency handover requirements specified in clause 6.1D.1.2.

A.16.3.1.3.2 Test Parameters

Supported test configurations are shown in table A.16.3.1.3.2-1. Both handover delay and interruption length are tested by using the parameters in table A.16.3.1.3.2-2, and A.16.3.1.3.2-3.

The test scenario comprises of two carriers and one cell on each carrier. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE receives a RRC handover command from the network. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

Table A.16.3.1.3.2-1: Intra-frequency handover from FR1 to FR1 test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode

4	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.3.1.3.2-2: General test parameters Intra-frequency handover from FR1 to FR1

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	≤5	

Table A.16.3.1.3.2-3: Cell specific test parameters for NR FR1-FR1 Intra frequency handover test case

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number			1		1	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
	Config 4		HD-FDD			
TDD configuration	Config 1,4		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf. 2.1			
$BW_{channel}$	Config 1,4	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		20: $N_{RB,c}$ = 52			
BWP BW	Config 1,4	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		20: $N_{RB,c}$ = 52			
DRx Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1, 4		SR.1.1 FDD			
	Config 2		SR.1.1 TDD			
	Config 3		SR2.1 TDD			
CORESET Reference Channel	Config 1, 4		CR.1.1 FDD			
	Config 2		CR.1.1 TDD			
	Config 3		CR2.1 TDD			
TRS configuration	Config 1, 4		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
OCNG Patterns			OP.1			
SMTC configuration for CD-SSB			SMTC.1 RedCap			
SMTC configuration for NCD-SSB			SMTC.2 RedCap			
CD-SSB Configuration	Config 1,2,4		SSB.4 RedCap FR1			
	Config 3		SSB.5 RedCap FR1			
NCD-SSB Configuration	Config 1,2,4		SSB.6 RedCap FR1 (Note 1)			
	Config 3		SSB.7 RedCap FR1 (Note 1)			
PDSCH/PDCCH subcarrier spacing	Config 1,2,4	kHz	15 kHz			
	Config 3		30 kHz			

PUCCH/PUSCH subcarrier spacing	Config 1,2,4	kHz	15 kHz			
	Config 3		30 kHz			
PRACH configuration			FR1 PRACH configuration 1			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP1		DLBWP.1.3 RedCap (Note 2)			
	Dedicated DL BWP2		DLBWP.1.3 RedCap (Note 2)			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP1		ULBWP.1.3 RedCap (Note 3)			
	Dedicated UL BWP2		ULBWP.1.3 RedCap (Note 3)			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 4)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note5		dBm/15kHz	-98			
N_{oc} Note5	Config 1,2	dBm/SCS	-98			
	Config 3		-95			
$\hat{E}_s / I_{ot}$		dB	8	-0.64	-Infinity	-0.64
$\hat{E}_s / N_{oc}$		dB	8	8	-Infinity	8
SSB_RP	Config 1	dBm/SCS	-90	-90	-Infinity	-90
	Config 2	dBm/SCS	-90	-90	-Infinity	-90
	Config 3	dBm/SCS	-87	-87	-Infinity	-87
Io Note6	Config 1,2	dBm/ 9.36MHz	-61.41	-58.71	-61.41	-58.71
	Config 3	dBm/ 18.72MHz	-58.41	-55.71	-58.41	-55.71
Propagation condition		-	AWGN		AWGN	
Antenna Configuration			1x1		1x1	
Timing offset to Cell 1 Asynchronous cells		ms	-		3	

Note 1: NCD-SSB is configured within dedicated RedCap DL BWP.
Note 2: The starting PRB index for dedicated DL BWP1 corresponding to CD-SSB PRB index; the starting PRB index for dediacted DL BWP2 corresponding to NCD-SSB PRB index;
Note 3: The starting PRB index for dedicated UL BWP1 is the same as the starting PRB index for dedicated DL BWP1; the starting PRB index for dedicated UL BWP2 is the same as the starting PRB index for dedicated DL BWP2.
Note 4: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 6: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.16.3.1.3.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than [112] ms from the beginning of time period T2.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2].

$T_{interrupt}$ = [102] ms in the test. $T_{interrupt}$ is defined in clause 6.1.1.2.2 and T_{search} defined in caluse 6.1D.1.2.

This gives a total of [112] ms.

A.16.3.1.4 Intra-frequency handover from FR1 to FR1; unknown target cell for 2 Rx UE

A.16.3.1.4.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR1-NR FR1 intra frequency handover requirements specified in clause 6.1D.1.2.

A.16.3.1.4.2 Test Parameters

Supported test configurations are shown in table A.16.3.1.4.2-1. Both handover delay and interruption length are tested by using the parameters in table A.16.3.1.4.2-2, and A.16.3.1.4.2-3.

The test scenario comprises of two carriers and one cell on each carrier. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE receives a RRC handover command from the network. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

Table A.16.3.1.4.2-1: Intra-frequency handover from FR1 to FR1 test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.3.1.4.2-2: General test parameters Intra-frequency handover from FR1 to FR1

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	≤5	

Table A.16.3.1.4.2-3: Cell specific test parameters for NR FR1-FR1 Intra frequency handover test case

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number			1		1	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
	Config 4		HD-FDD			
TDD configuration	Config 1,4		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf. 2.1			
$BW_{channel}$	Config 1,4	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		20: $N_{RB,c}$ = 52			
BWP BW	Config 1,4	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		20: $N_{RB,c}$ = 52			
DRx Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1, 4		SR.1.1 FDD			
	Config 2		SR.1.1 TDD			
	Config 3		SR2.1 TDD			
CORESET Reference Channel	Config 1, 4		CR.1.1 FDD			
	Config 2		CR.1.1 TDD			
	Config 3		CR2.1 TDD			
TRS configuration	Config 1, 4		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
OCNG Patterns			OP.1			
SMTC configuration for CD-SSB			SMTC.1 RedCap			
SMTC configuration for NCD-SSB			SMTC.2 RedCap			
CD-SSB Configuration	Config 1,2,4		SSB.4 RedCap FR1			
	Config 3		SSB.5 RedCap FR1			
NCD-SSB Configuration	Config 1,2,4		SSB.6 RedCap FR1 (Note 1)			
	Config 3		SSB.7 RedCap FR1 (Note 1)			
PDSCH/PDCCH subcarrier spacing	Config 1,2,4	kHz	15 kHz			
	Config 3		30 kHz			
PUCCH/PUSCH subcarrier spacing	Config 1,2,4	kHz	15 kHz			
	Config 3		30 kHz			
PRACH configuration			FR1 PRACH configuration 1			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP1		DLBWP.1.3 RedCap (Note 2)			
	Dedicated DL BWP2		DLBWP.1.3 RedCap (Note 2)			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP1		ULBWP.1.3 RedCap (Note 3)			
	Dedicated UL BWP2		ULBWP.1.3 RedCap (Note 3)			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						

EPRE ratio of PDSCH to PDSCH EPRE ratio of OCNG DMRS to SSS(Note 4) EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note5		dBm/15kHz	-98			
N_{oc} Note5	Config 1,2	dBm/SCS	-98			
	Config 3		-95			
$\hat{E}_s / I_{ot}$		dB	8	-0.64	-Infinity	-0.64
$\hat{E}_s / N_{oc}$		dB	8	8	-Infinity	8
SSB_RP	Config 1	dBm/SCS	-90	-90	-Infinity	-90
	Config 2	dBm/SCS	-90	-90	-Infinity	-90
	Config 3	dBm/SCS	-87	-87	-Infinity	-87
Io Note6	Config 1,2	dBm/ 9.36MHz	-61.41	-58.71	-61.41	-58.71
	Config 3	dBm/ 18.72MHz	-58.41	-55.71	-58.41	-55.71
Propagation condition		-	AWGN		AWGN	
Timing offset to Cell 1 Asynchronous cells		ms	-		3	

Note 1: NCD-SSB is configured within dedicated RedCap DL BWP.
Note 2: The starting PRB index for dedicated DL BWP1 corresponding to CD-SSB PRB index; the starting PRB index for dediacted DL BWP2 corresponding to NCD-SSB PRB index;
Note 3: The starting PRB index for dedicated UL BWP1 is the same as the starting PRB index for dedicated DL BWP1; the starting PRB index for dedicated UL BWP2 is the same as the starting PRB index for dedicated DL BWP2.
Note 4: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 6: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The test requirements are given in clause A.6.3.1.2.3.

A.16.3.1.5 Inter-frequency handover from FR1 to FR1; unknown target cell for 1 Rx UE

A.16.3.1.5.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR1-NR FR1 inter frequency handover requirements or 1 Rx RedCap UE specified in clause 6.1D.1.2.

A.16.3.1.5.2 Test Parameters

Supported test configurations are shown in table A.16.3.1.5.2-1. Both handover delay and interruption length are tested by using the parameters in table A.16.3.1.5.2-2, and A.16.3.1.5.2-3.

The test scenario comprises of two carriers and one cell on each carrier. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE receives a RRC handover command from the network, then UE handover from cell 1's CD-SSB to cell 2's specific Redcap BWP associated with NCD-SSB. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

Table A.16.3.1.5.2-1: Inter-frequency handover from FR1 to FR1 test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.3.1.5.2-2: General test parameters Inter-frequency handover from FR1 to FR1

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
T1		s	5	
T2		s	≤5	

Table A.16.3.1.5.2-3: Cell specific test parameters for NR FR1-FR1 Inter frequency handover test case

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number			1		2	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
	Config 4		HD-FDD			
TDD configuration	Config 1,4		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
$BW_{channel}$	Config 1,4	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		20: $N_{RB,c}$ = 51			
BWP BW	Config 1,4	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		20: $N_{RB,c}$ = 51			
TRS configuration	Config 1,4		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
DRx Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD			
	Config 2		SR.1.1 TDD			
	Config 3		SR2.1 TDD			
CORESET Reference Channel	Config 1,4		CR.1.1 FDD			
	Config 2		CR.1.1 TDD			
	Config 3		CR2.1 TDD			
OCNG Patterns			OP.1			
SMTC Configuration			SMTC.1		SMTC.2 RedCap	
SSB Configuration	Config 1,2,4		SSB.1 FR1		SSB.6 Redcap FR1	
	Config 3		SSB.1 RedCap FR1		SSB.7 Redcap FR1	

PDSCH/PDCCH subcarrier spacing	Config 1,2,4	kHz	15 kHz			
	Config 3		30 kHz			
PUCCH/PUSCH subcarrier spacing	Config 1,2,4	kHz	15 kHz			
	Config 3		30 kHz			
PRACH configuration			FR1 PRACH configuration 1			
BWP	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.3 RedCap		DLBWP.1.3 RedCap	
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		DLBWP.1.3 RedCap		ULBWP.1.3 RedCap	
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-98		-98	
N_{oc} Note2	Config 1,2,4	dBm/SCS	-98		-98	
	Config 3		-95		-95	
$\hat{E}_s / I_{ot}$		dB	4	4	-Infinity	5
$\hat{E}_s / N_{oc}$		dB	4	4	-Infinity	5
SSB_RP	Config 1,2,4	dBm/SCS	-94	-94	-Infinity	-93
	Config 3	dBm/SCS	-91	-91	-Infinity	-90
Io Note3	Config 1,2,4	dBm/ 9.36MHz	-64.59	-64.59	-70.05	-63.85
	Config 3	dBm/ 18.36MHz	-61.67	-61.67	-67.13	-60.93
Propagation condition		-	AWGN		AWGN	
Antenna Configuration			1x1			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.16.3.1.5.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 532 ms from the beginning of time period T2.
The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2].

$T_{interrupt}$ = 522 ms in the test. $T_{interrupt}$ is defined in clause 6.1D.1.2.

This gives a total of 532 ms.

A.16.3.1.6 Inter-frequency handover from FR1 to FR1; unknown target cell for 2 Rx UE

A.16.3.1.6.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR1-NR FR1 inter frequency handover requirements or 2 Rx RedCap UE specified in clause 6.1D.1.2.

A.16.3.1.6.2 Test Parameters

Supported test configurations are shown in table A.16.3.1.6.2-1. Both handover delay and interruption length are tested by using the parameters in table A.16.3.1.6.2-2, and A.16.3.1.6.2-3.

The test scenario comprises of two carriers and one cell on each carrier. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE receives a RRC handover command from the network, then UE handover from cell 1's CD-SSB to cell 2's specific Redcap BWP associated with NCD-SSB. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

Table A.16.3.1.6.2-1: Inter-frequency handover from FR1 to FR1 test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.3.1.6.2-2: General test parameters Inter-frequency handover from FR1 to FR1

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
T1		s	5	
T2		s	≤5	

Table A.16.3.1.6.2-3: Cell specific test parameters for NR FR1-FR1 Inter frequency handover test case

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number			1		2	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
	Config 4					
TDD configuration	Config 1,4		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			

$BW_{channel}$	Config 1,4	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		20: $N_{RB,c}$ = 51			
BWP BW	Config 1,4	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		20: $N_{RB,c}$ = 51			
TRS configuration	Config 1,4		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
DRx Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD			
	Config 2		SR.1.1 TDD			
	Config 3		SR2.1 TDD			
CORESET Reference Channel	Config 1,4		CR.1.1 FDD			
	Config 2		CR.1.1 TDD			
	Config 3		CR2.1 TDD			
OCNG Patterns			OP.1			
SMTC Configuration			SMTC.1		SMTC.2 RedCap	
SSB Configuration	Config 1,2,4		SSB.1 FR1		SSB.6 Redcap FR1	
	Config 3		SSB.1 RedCap FR1		SSB.7 Redcap FR1	
PDSCH/PDCCH subcarrier spacing	Config 1,2,4	kHz	15 kHz			
	Config 3		30 kHz			
PUCCH/PUSCH subcarrier spacing	Config 1,2,4	kHz	15 kHz			
	Config 3		30 kHz			
PRACH configuration			FR1 PRACH configuration 1			
BWP	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.3 RedCap		DLBWP.1.3 RedCap	
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		DLBWP.1.3 RedCap		ULBWP.1.3 RedCap	
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-98		-98	
N_{oc} Note2	Config 1,2,4	dBm/SCS	-98		-98	
	Config 3		-95		-95	
$\hat{E}_s / I_{ot}$		dB	4	4	-Infinity	5
$\hat{E}_s / N_{oc}$		dB	4	4	-Infinity	5
SSB_RP	Config 1,2,4	dBm/SCS	-94	-94	-Infinity	-93
	Config 3	dBm/SCS	-91	-91	-Infinity	-90
Io Note3	Config 1,2,4	dBm/ 9.36MHz	-64.59	-64.59	-70.05	-63.85
	Config 3	dBm/ 18.36MHz	-61.67	-61.67	-67.13	-60.93
Propagation condition		-	AWGN		AWGN	

Antenna configuration		1x2
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.	
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.	
Note 3:	Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.	

A.16.3.1.6.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 372 ms from the beginning of time period T2.
The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2].

$T_{interrupt}$ = 362 ms in the test. $T_{interrupt}$ is defined in clause 6.1D.1.2.

This gives a total of 372 ms.

A.16.3.1.7 SA NR - E-UTRAN handover for 1Rx UE

A.16.3.1.7.1 Test Purpose and Environment

The purpose of this set of tests is to verify that the UE can make correct inter-RAT E-UTRAN handover when operating in standalone (SA) operation with PCell in FR1. This test shall verify the NR to E-UTRAN handover requirements as specified in clause 6.1D.2.1.

The test comprises of one NR carrier and one E-UTRA carrier. There are two cells and one cell on each carrier. Cell 1 is the NR PCell and Cell 2 is an inter-RAT E-UTRAN neighbour cell. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE does not have any timing information of Cell 2. Starting T2, Cell 2 becomes detectable and the UE is expected to detect and send a measurement report. Gap pattern configuration with id #0 as specified in Table 9.1.2-1 is configured before T2 begins to enable inter-RAT frequency monitoring.

A RRC message implying handover shall be sent to the UE during period T2 after the UE has reported Event B2. The start of T3 is the instant when the last TTI containing the RRC message implying handover is sent to the UE. The handover message shall contain Cell 2 as the target cell.

Supported test configurations are shown in table A.16.3.1.7.1-1. General test parameters are provided in Table A.16.3.1.7.1-2. Cell specific test parameters for Cell 1 and Cell 2 are provided in Tables A.16.3.1.7.1-3 and A.16.3.1.7.1-4 respectively.

Table A.16.3.1.7.1-1: Supported test configurations for SA inter-RAT E-UTRAN handover tests

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE TDD
7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE FDD
8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.3.1.7.1-2: General test parameters for SA inter-RAT E-UTRAN handover

Parameter		Unit	Value	Comment
NR RF Channel Number			1	1 NR carrier frequency is used in the test
LTE RF Channel Number			2	1 E-UTRAN carrier frequency is used in the test
Initial conditions	Active cell		Cell 1	NR cell
	Neighbouring cell		Cell 2	E-UTRAN cell
Final condition	Active cell		Cell 2	
NR measurement quantity			SS-RSRP	
E-UTRAN measurement quantity			RSRP	
b2-Threshold1		dBm	As specified in Table A.16.3.1.10-3	Absolute NR SS-RSRP threshold for event B2
b2-Threshold2EUTRAN		dBm	-98	Absolute E-UTRAN RSRP threshold for event B2
Hysteresis		dB	0	
TimeToTrigger		s	0	
Filter coefficient			0	L3 filtering is not used
DRX			OFF	Non-DRX test
Access Barring Information		-	Not sent	No additional delays in random access procedure
Time offset between cells			3 ms	Asynchronous cells
Gap pattern configuration Id			0	As specified in Table 9.1.2-1 started before T2 starts
T1		s	5	
T2		s	≤5	
T3		s	1	

Table A.16.3.1.7.1-3: Cell specific test parameters for SA inter-RAT E-UTRA handover (Cell 1)

Parameter		Unit	Configuration	Cell 1		
				T1	T2	T3
RF channel number			1, 2, 3, 4, 5, 6,7, 8	1		
Duplex mode			1, 4	FDD		
			2, 3, 5, 6	TDD		
			7, 8	HD-FDD		
TDD Configuration			2, 5	TDDConf.1.1		
			3, 6	TDDConf.1.2		
$BW_{channel}$		MHz	1, 4,7, 8	10: $N_{RB,c}$ = 52 (FDD)		
			2, 5	10: $N_{RB,c}$ = 52 (TDD)		
			3, 6	20: $N_{RB,c}$ = 51 (TDD)		
PDSCH reference measurement channel			1, 4,7, 8	SR.1.1 FDD		
			2, 5	SR.1.1 TDD		
			3, 6	SR.2.1 TDD		
CORSET reference channel			1, 4,7, 8	CR.1.1 FDD		
			2, 5	CR.1.1 TDD		
			3, 6	CR.2.1 TDD		
TRS configuration			1, 4,7, 8	TRS.1.1 FDD		
			2, 5	TRS.1.1 TDD		
			3, 6	TRS.1.2 TDD		
OCNG pattern[Note1]			1, 2, 3, 4, 5, 6,7, 8	OP.1		
BWP	Initial DL BWP	1, 2, 3, 4, 5, 6,7, 8	1, 2, 3, 4, 5, 6,7	DLBWP.0.1		

	Dedicated DL BWP			DLBWP.1.1		
	Initial UL BWP			ULBWP.0.1		
	Dedicated UL BWP			ULBWP.1.1		
SMTC configuration			1, 2, 3, 4, 5, 6,7, 8	SMTC.1 RedCap		
SSB configuration			1, 2, 4, 5,7, 8	SSB.1 FR1		
			3, 6	SSB.1 RedCap FR1		
b2-Threshold1		dBm	1, 2, 4, 5	-96		
			3, 6	-93		
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4, 5, 6,7, 8	0		
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						
EPRE ratio of PDCCH to PDCCH_DMRS						
EPRE ratio of PDSCH_DMRS to SSS						
EPRE ratio of PDSCH to PDSCH_DMRS						
EPRE ratio of OCNG DMRS to SSS						
EPRE ratio of OCNG to OCNG DMRS						
N_{oc}[Note2]		dBm/15 KHz	1, 2, 3, 4, 5, 6,7, 8	-100	-104	-100
N_{oc}[Note2]		dBm/SCS	1, 2, 4, 5,7	-100	-104	-100
			3, 6, 8	-97	-101	-97
$\hat{E}_s/N_{oc}$		dB	1, 2, 3, 4, 5, 6,7, 8	12	0	-4
$\hat{E}_s/I_{ot}$[Note3]		dB	1, 2, 3, 4, 5, 6,7	12	0	-4
SS-RSRP[Note3]		dBm/SCS	1, 2, 4, 5, 7, 8	-88	-104	-104
			3, 6	-85	-101	-101
Io[Note3]		dBm/9.36 MHz	1, 2, 4, 5, 7, 8	-59.78	-73.04	-70.59
		dBm/18.36 MHz	3, 6	-56.86	-70.11	-67.67
Propagation condition			1, 2, 3, 4, 5, 6,7,8	AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.16.3.1.7.1-4: Cell specific test parameters for SA inter-RAT E-UTRA handover (Cell 2)

Parameter	Unit	Configuration	Cell 2		
			T1	T2	T3
RF channel number		1, 2, 3, 4, 5, 6, 7, 8	2		
Duplex mode		1, 2, 3, 7	FDD		

		4, 5, 6, 8	TDD		
TDD special subframe configuration[Note1]		4, 5, 6, 8	6		
TDD uplink-downlink configuration[Note1]		4, 5, 6, 8	1		
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6, 7, 8	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100		
PRACH Configuration[Note2]		1, 2, 3, 7	4		
		4, 5, 6, 8	53		
PDSCH parameters: DL Reference Measurement Channel[Note3]		1, 2, 3, 7	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD		
		4, 5, 6, 8	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD		
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note3]		1, 2, 3, 7	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD		
		4, 5, 6, 8	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD		
OCNG Patterns[Note3]		1, 2, 3, 7	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD		
		4, 5, 6, 8	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD		
PBCH_RA	dB	1, 2, 3, 4, 5, 6, 7, 8	0		
PBCH_RB					
PSS_RA					
SSS_RA					
PCFICH_RB					
PHICH_RA					
PHICH_RB					
PDCCH_RA					
PDCCH_RB					
PDSCH_RA					
PDSCH_RB					
OCNG_RA[Note4]					
OCNG_RB[Note4]					
N_{oc}[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-98		
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	8	78
$\hat{E}_s/I_{ot}$[Note6]	dB	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	78	78
RSRP[Note6]	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	-90	-90
SCH_RP[Note6]	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	-90	-90
Io[Note6]	dBm/9MHz	1, 2, 3, 4, 5, 6, 7, 8	-67.21 +10log($N_{RB,c}$/100)	-58.57 +10log($N_{RB,c}$/100)	-58.57 +10log($N_{RB,c}$/100)

Propagation Condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [23].
Note 3: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 4: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 6: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 7: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].

A.16.3.1.7.2 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 85 ms from the beginning of time period T3.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 50 ms and $T_{interrupt}$ = 35 ms in the test based on requirements specified in clause 6.1D.2.1.

This gives a total of 85 ms.

A.16.3.1.8 SA NR - E-UTRAN handover for 2Rx UE

A.16.3.1.8.1 Test Purpose and Environment

The purpose of this set of tests is to verify that the UE can make correct inter-RAT E-UTRAN handover when operating in standalone (SA) operation with PCell in FR1. This test shall verify the NR to E-UTRAN handover requirements as specified in clause 6.1D.2.1.

The test comprises of one NR carrier and one E-UTRA carrier. There are two cells and one cell on each carrier. Cell 1 is the NR PCell and Cell 2 is an inter-RAT E-UTRAN neighbour cell. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE does not have any timing information of Cell 2. Starting T2, Cell 2 becomes detectable and the UE is expected to detect and send a measurement report. Gap pattern configuration with id #0 as specified in Table 9.1.2-1 is configured before T2 begins to enable inter-RAT frequency monitoring.

A RRC message implying handover shall be sent to the UE during period T2 after the UE has reported Event B2. The start of T3 is the instant when the last TTI containing the RRC message implying handover is sent to the UE. The handover message shall contain Cell 2 as the target cell.

Supported test configurations are shown in table A.16.3.1.8.1-1. General test parameters are provided in Table A.16.3.1.8.1-2. Cell specific test parameters for Cell 1 and Cell 2 are provided in Tables A.16.3.1.8.1-3 and A.16.3.1.8.1-4 respectively.

Table A.16.3.1.8.1-1: Supported test configurations for SA inter-RAT E-UTRAN handover tests

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD

6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE TDD
7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE FDD
8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.3.1.8.1-2: General test parameters for SA inter-RAT E-UTRAN handover

Parameter		Unit	Value	Comment
NR RF Channel Number			1	1 NR carrier frequency is used in the test
LTE RF Channel Number			2	1 E-UTRAN carrier frequency is used in the test
Initial conditions	Active cell		Cell 1	NR cell
	Neighbouring cell		Cell 2	E-UTRAN cell
Final condition	Active cell		Cell 2	
NR measurement quantity			SS-RSRP	
E-UTRAN measurement quantity			RSRP	
b2-Threshold1		dBm	As specified in Table A.16.3.1.10-3	Absolute NR SS-RSRP threshold for event B2
b2-Threshold2EUTRAN		dBm	-98	Absolute E-UTRAN RSRP threshold for event B2
Hysteresis		dB	0	
TimeToTrigger		s	0	
Filter coefficient			0	L3 filtering is not used
DRX			OFF	Non-DRX test
Access Barring Information		-	Not sent	No additional delays in random access procedure
Time offset between cells			3 ms	Asynchronous cells
Gap pattern configuration Id			0	As specified in Table 9.1.2-1 started before T2 starts
T1		s	5	
T2		s	≤5	
T3		s	1	

Table A.16.3.1.8.1-3: Cell specific test parameters for SA inter-RAT E-UTRA handover (Cell 1)

Parameter	Unit	Configuration	Cell 1		
			T1	T2	T3
RF channel number		1, 2, 3, 4, 5, 6,7, 8	1		
Duplex mode		1, 4	FDD		
		2, 3, 5, 6	TDD		
		7, 8	HD-FDD		
TDD Configuration		2, 5	TDDConf.1.1		
		3, 6	TDDConf.1.2		
$BW_{channel}$	MHz	1, 4, 7, 8	10: $N_{RB,c}$ = 52 (FDD)		
		2, 5	10: $N_{RB,c}$ = 52 (TDD)		
		3, 6	20: $N_{RB,c}$ = 51 (TDD)		
PDSCH reference measurement channel		1, 4,7, 8	SR.1.1 FDD		
		2, 5	SR.1.1 TDD		
		3, 6	SR.2.1 TDD		
CORSET reference channel		1, 4,7, 8	CR.1.1 FDD		
		2, 5	CR.1.1 TDD		
		3, 6	CR.2.1 TDD		
TRS configuration		1, 4,7, 8	TRS.1.1 FDD		
		2, 5	TRS.1.1 TDD		
		3, 6	TRS.1.2 TDD		

OCNG pattern[Note1]			1, 2, 3, 4, 5, 6,7, 8	OP.1		
BWP	Initial DL BWP	1, 2, 3, 4, 5, 6,7, 8	1, 2, 3, 4, 5, 6,7	DLBWP.0.1		
	Dedicated DL BWP			DLBWP.1.1		
	Initial UL BWP			ULBWP.0.1		
	Dedicated UL BWP			ULBWP.1.1		
SMTC configuration			1, 2, 3, 4, 5, 6,7, 8	SMTC.1 RedCap		
SSB configuration			1, 2, 4, 5,7, 8	SSB.1 FR1		
			3, 6	SSB.1 RedCap FR1		
b2-Threshold1		dBm	1, 2, 4, 5,7, 8	-96		
			3, 6	-93		
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4, 5, 6,7, 8	0		
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						
EPRE ratio of PDCCH to PDCCH_DMRS						
EPRE ratio of PDSCH_DMRS to SSS						
EPRE ratio of PDSCH to PDSCH_DMRS						
EPRE ratio of OCNG DMRS to SSS						
EPRE ratio of OCNG to OCNG DMRS						
N_{oc}[Note2]		dBm/15 KHz	1, 2, 3, 4, 5, 6,7, 8	-100	-104	-100
N_{oc}[Note2]		dBm/SCS	1, 2, 4, 5,7, 8	-100	-104	-100
			3, 6	-97	-101	-97
$\hat{E}_s/N_{oc}$		dB	1, 2, 3, 4, 5, 6,7, 8	12	0	-4
$\hat{E}_s/I_{ot}$[Note3]		dB	1, 2, 3, 4, 5, 6,7, 8	12	0	-4
SS-RSRP[Note3]		dBm/SCS	1, 2, 4, 5,7, 8	-88	-104	-104
			3, 6	-85	-101	-101
Io[Note3]		dBm/9.36 MHz	1, 2, 4, 5,7, 8	-59.78	-73.04	-70.59
		dBm/18.36MHz	3, 6	-56.86	-70.11	-67.67
Propagation condition			1, 2, 3, 4, 5, 6,7, 8	AWGN		
Antenna Configuration and Correlation Matrix			1, 2, 3, 4, 5, 6,7, 8	1x2 Low		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.16.3.1.8.1-4: Cell specific test parameters for SA inter-RAT E-UTRA handover (Cell 2)

Parameter	Unit	Configuration	Cell 2		
			T1	T2	T3
RF channel number		1, 2, 3, 4, 5, 6, 7, 8	2		
Duplex mode		1, 2, 3, 7	FDD		
		4, 5, 6, 8	TDD		
TDD special subframe configuration[Note1]		4, 5, 6, 8	6		
TDD uplink-downlink configuration[Note1]		4, 5, 6, 8	1		
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6, 7, 8	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100		
PRACH Configuration[Note2]		1, 2, 3, 7	4		
		4, 5, 6, 8	53		
PDSCH parameters: DL Reference Measurement Channel[Note3]		1, 2, 3, 7	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD		
		4, 5, 6, 8	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD		
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note3]		1, 2, 3, 7	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD		
		4, 5, 6, 8	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD		
OCNG Patterns[Note3]		1, 2, 3, 7	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD		
		4, 5, 6, 8	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD		
PBCH_RA	dB	1, 2, 3, 4, 5, 6, 7, 8	0		
PBCH_RB					
PSS_RA					
SSS_RA					
PCFICH_RB					
PHICH_RA					
PHICH_RB					
PDCCH_RA					
PDCCH_RB					
PDSCH_RA					
PDSCH_RB					
OCNG_RA[Note4]					
OCNG_RB[Note4]					
N_{oc}[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-98		
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	8	8
$\hat{E}_s/I_{ot}$[Note6]	dB	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	8	8

RSRP[Note6]	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	-90	-90
SCH_RP[Note6]	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	-90	-90
Io[Note6]	dBm/9MHz	1, 2, 3, 4, 5, 6, 7, 8	-67.21 +10log($N_{RB,c}$/100)	-58.57 +10log($N_{RB,c}$/100)	-58.57 +10log($N_{RB,c}$/100)
Propagation Condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN		
Antenna Configuration and Correlation Matrix Note7		1, 2, 3, 4, 5, 6, 7, 8	1x2 Low		

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [23].
Note 3: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 4: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 6: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 7: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].

A.16.3.1.8.2 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 85 ms from the beginning of time period T3.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 50 ms and is specified in clause 6.1.2.1.

$T_{interrupt}$ = 35 ms in the test; $T_{interrupt}$ is defined in clause 6.1.2.1.

This gives a total of 85 ms.

A.16.3.1.9 SA NR - E-UTRAN handover with unknown target cell for 1 Rx UE

A.16.3.1.9.1 Test Purpose and Environment

The purpose of this set of tests is to verify that the UE can make correct inter-RAT E-UTRAN handover when operating in standalone (SA) operation with PCell in FR1. This test shall verify the NR to E-UTRAN handover requirements for the case when the target E-UTRAN cell is unknown as specified in clause 6.1D.2.1.

The test comprises of one NR carrier and one E-UTRA carrier. There are two cells and one cell on each carrier. Cell 1 is the NR PCell and Cell 2 is an inter-RAT E-UTRAN neighbour cell. The test consists of two successive time periods, with time durations of T1 and T2 respectively. At the start of time duration T1, the UE does not have any timing information of Cell 2. Starting T2, Cell 2 becomes detectable. No Gap pattern shall be configured.

A RRC message implying handover shall be sent to the UE during period T1. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE. The handover message shall contain Cell 2 as the target cell.

Supported test configurations are shown in table A.16.3.1.9-1. General test parameters are provided in Table A.16.3.1.9.1-2. Cell specific test parameters for Cell 1 and Cell 2 are provided in Tables A.16.3.1.9.1-3 and A.16.3.1.9.1-4 respectively.

Table A.16.3.1.9.1-1: Supported test configurations for SA inter-RAT E-UTRAN handover tests

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6	NR 30kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE TDD
7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE FDD
8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.3.1.9.1-2: General test parameters for SA inter-RAT E-UTRAN handover

Parameter		Unit	Value	Comment
NR RF Channel Number			1	1 NR carrier frequency is used in the test
LTE RF Channel Number			2	1 E-UTRAN carrier frequency is used in the test
Initial conditions	Active cell		Cell 1	NR cell
	Neighbouring cell		Cell 2	E-UTRAN cell
Final condition	Active cell		Cell 2	
NR measurement quantity			SS-RSRP	
DRX			OFF	Non-DRX test
Access Barring Information		-	Not sent	No additional delays in random access procedure
Time offset between cells			3 ms	Asynchronous cells
T1		s	≤5	
T2		s	1	

Table A.16.3.1.9.1-3: Cell specific test parameters for SA inter-RAT E-UTRA handover (Cell 1)

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6,7, 8	1	
Duplex mode		1, 4	FDD	
		2, 3, 5, 6	TDD	
		7, 8	HD-FDD	
TDD Configuration		2, 5	TDDConf.1.1	
		3, 6	TDDConf.1.2	
$BW_{channel}$	MHz	1, 4,7, 8	10: $N_{RB,c}$ = 52 (FDD)	
		2, 5	10: $N_{RB,c}$ = 52 (TDD)	
		3, 6	20: $N_{RB,c}$ = 51 (TDD)	
PDSCH reference measurement channel		1, 4,7, 8	SR.1.1 FDD	
		2, 5	SR.1.1 TDD	
		3, 6	SR.2.1 TDD	
CORSET reference channel		1, 4,7, 8	CR.1.1 FDD	
		2, 5	CR.1.1 TDD	
		3, 6	CR.2.1 TDD	
TRS configuration		1, 4,7, 8	TRS.1.1 FDD	
		2, 5	TRS.1.1 TDD	
		3, 6	TRS.1.2 TDD	
OCNG pattern[Note1]		1, 2, 3, 4, 5, 6,7, 8	OP.1	

BWP	Initial DL BWP	1, 2, 3, 4, 5, 6,7, 8	1, 2, 3, 4, 5, 6,7	DLBWP.0.1	
	Dedicated DL BWP			DLBWP.1.1	
	Initial UL BWP			ULBWP.0.1	
	Dedicated UL BWP			ULBWP.1.1	
SMTC configuration			1, 2, 3, 4, 5, 6,7, 8	SMTC.1 RedCap	
SSB configuration			1, 2, 4, 5,7, 8	SSB.1 FR1	
			3, 6	SSB.1 RedCap FR1	
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4, 5, 6,7, 8	0	
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS					
EPRE ratio of OCNG to OCNG DMRS					
N_{oc} Note2		dBm/15 KHz	1, 2, 3, 4, 5, 6,7, 8	-98	
N_{oc} Note2		dBm/SCS	1, 2, 4, 5,7, 8	-98	
			3, 6	-95	
$\hat{E}_s/N_{oc}$		dB	1, 2, 3, 4, 5, 6,7, 8	0	0
$\hat{E}_s/I_{ot}$ Note3		dB	1, 2, 3, 4, 5, 6,7, 8	0	0
SS-RSRP Note3		dBm/SCS	1, 2, 4, 5,7, 8	-98	-98
			3, 6	-95	-95
Io Note3		dBm/9.36 MHz	1, 2, 4, 5,7, 8	-67.04	-67.04
		dBm/18.36 MHz	3, 6	-64.11	-64.11
Propagation condition			1, 2, 3, 4, 5, 6,7, 8	AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.16.3.1.9.1-4: Cell specific test parameters for SA inter-RAT E-UTRA handover (Cell 2)

Parameter	Unit	Configuration	Cell 2	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6, 7, 8	2	
Duplex mode		1, 2, 3, 7	FDD	
		4, 5, 6, 8	TDD	

TDD special subframe configuration[Note1]		4, 5, 6, 7	6	
TDD uplink-downlink configuration[Note1]		4, 5, 6, 7	1	
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6, 7, 8	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PRACH Configuration[Note2]		1, 2, 3, 7	4	
		4, 5, 6, 8	53	
PDSCH parameters: DL Reference Measurement Channel[Note3]		1, 2, 3, 7	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6, 8	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note3]		1, 2, 3, 7	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6, 8	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note3]		1, 2, 3, 7	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6, 8	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
PBCH_RA	dB	1, 2, 3, 4, 5, 6, 7, 8	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note4]				
OCNG_RB[Note4]				
N_{oc}[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-98	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	7
$\hat{E}_s/I_{ot}$[Note6]	dB	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	7
RSRP[Note6]	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	-91
SCH_RP[Note6]	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	-91
Io[Note6]	dBm/9MHz	1, 2, 3, 4, 5, 6, 7, 8	-70.22	-62.43
Propagation Condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [23].
Note 3: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 4: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 5:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 6:	$\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 7:	Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].

A.16.3.1.9.2 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 165 ms from the beginning of time period T2.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 50 ms and $T_{interrupt}$ = 115 ms in the test based on requirements specified in clause 6.1D.2.1.

This gives a total of 165 ms.

A.16.3.1.10 SA NR - E-UTRAN handover with unknown target cell for 2 Rx UE

A.16.3.1.10.1 Test Purpose and Environment

The purpose of this set of tests is to verify that the UE can make correct inter-RAT E-UTRAN handover when operating in standalone (SA) operation with PCell in FR1. This test shall verify the NR to E-UTRAN handover requirements for the case when the target E-UTRAN cell is unknown as specified in clause 6.1D.2.1.

The test comprises of one NR carrier and one E-UTRA carrier. There are two cells and one cell on each carrier. Cell 1 is the NR PCell and Cell 2 is an inter-RAT E-UTRAN neighbour cell. The test consists of two successive time periods, with time durations of T1 and T2 respectively. At the start of time duration T1, the UE does not have any timing information of Cell 2. Starting T2, Cell 2 becomes detectable. No Gap pattern shall be configured.

A RRC message implying handover shall be sent to the UE during period T1. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE. The handover message shall contain Cell 2 as the target cell.

Supported test configurations are shown in table A.16.3.1.10.1-1. General test parameters are provided in Table A.16.3.1.10.12. Cell specific test parameters for Cell 1 and Cell 2 are provided in Tables A.16.3.1.10.1-3 and A.16.3.1.10.1-4 respectively.

Table A.16.3.1.10.1-1: Supported test configurations for SA inter-RAT E-UTRAN handover tests

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6	NR 30kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE TDD
7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE FDD
8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.3.1.10.1-2: General test parameters for SA inter-RAT E-UTRAN handover

Parameter	Unit	Value	Comment

NR RF Channel Number			1	1 NR carrier frequency is used in the test
LTE RF Channel Number			2	1 E-UTRAN carrier frequency is used in the test
Initial conditions	Active cell		Cell 1	NR cell
	Neighbouring cell		Cell 2	E-UTRAN cell
Final condition	Active cell		Cell 2	
NR measurement quantity			SS-RSRP	
DRX			OFF	Non-DRX test
Access Barring Information		-	Not sent	No additional delays in random access procedure
Time offset between cells			3 ms	Asynchronous cells
T1		s	≤5	
T2		s	1	

Table A.16.3.1.10.1-3: Cell specific test parameters for SA inter-RAT E-UTRA handover (Cell 1)

Parameter		Unit	Configuration	Cell 1	
				T1	T2
RF channel number			1, 2, 3, 4, 5, 6,7, 8	1	
Duplex mode			1, 4	FDD	
			2, 3, 5, 6	TDD	
			7, 8	HD-FDD	
TDD Configuration			2, 5	TDDConf.1.1	
			3, 6	TDDConf.1.2	
$BW_{channel}$		MHz	1, 4,7, 8	10: $N_{RB,c}$ = 52 (FDD)	
			2, 5	10: $N_{RB,c}$ = 52 (TDD)	
			3, 6	20: $N_{RB,c}$ = 51 (TDD)	
PDSCH reference measurement channel			1, 4,7, 8	SR.1.1 FDD	
			2, 5	SR.1.1 TDD	
			3, 6	SR.2.1 TDD	
CORSET reference channel			1, 4,7, 8	CR.1.1 FDD	
			2, 5	CR.1.1 TDD	
			3, 6	CR.2.1 TDD	
TRS configuration			1, 4,7, 8	TRS.1.1 FDD	
			2, 5	TRS.1.1 TDD	
			3, 6	TRS.1.2 TDD	
OCNG pattern[Note1]			1, 2, 3, 4, 5, 6,7, 8	OP.1	
BWP	Initial DL BWP	1, 2, 3, 4, 5, 6,7, 8	1, 2, 3, 4, 5, 6,7	DLBWP.0.1	
	Dedicated DL BWP			DLBWP.1.1	
	Initial UL BWP			ULBWP.0.1	
	Dedicated UL BWP			ULBWP.1.1	
SMTC configuration			1, 2, 3, 4, 5, 6,7, 8	SMTC.1 RedCap	
SSB configuration			1, 2, 4, 5,7, 8	SSB.1 FR1	
			3, 6	SSB.1 RedCap FR1	
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4, 5, 6,7, 8	0	
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					

EPRE ratio of PDCCH_DMRS to SSS				
EPRE ratio of PDCCH to PDCCH_DMRS				
EPRE ratio of PDSCH_DMRS to SSS				
EPRE ratio of PDSCH to PDSCH_DMRS				
EPRE ratio of OCNG DMRS to SSS				
EPRE ratio of OCNG to OCNG DMRS				
N_{oc}[Note2]	dBm/15 KHz	1, 2, 3, 4, 5, 6,7, 8	-98	
N_{oc}[Note2]	dBm/SCS	1, 2, 4, 5,7, 8	-98	
		3, 6	-95	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6,7, 8	0	0
$\hat{E}_s/I_{ot}$[Note3]	dB	1, 2, 3, 4, 5, 6,7, 8	0	0
SS-RSRP[Note3]	dBm/SCS	1, 2, 4, 5, 7, 8	-98	-98
		3, 6	-95	-95
Io[Note3]	dBm/9.36 MHz	1, 2, 4, 5,7, 8	-67.04	-67.04
	dBm/18.36 MHz	3, 6	-64.12	-64.12
Propagation condition		1, 2, 3, 4, 5, 6,7, 8	AWGN	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6,7, 8	1x2 Low	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.16.3.1.10.1-4: Cell specific test parameters for SA inter-RAT E-UTRA handover (Cell 2)

Parameter	Unit	Configuration	Cell 2	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6, 7, 8	2	
Duplex mode		1, 2, 3, 7	FDD	
		4, 5, 6, 8	TDD	
TDD special subframe configuration[Note1]		4, 5, 6, 8	6	
TDD uplink-downlink configuration[Note1]		4, 5, 6, 8	1	
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6, 7, 8	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PRACH Configuration[Note2]		1, 2, 3, 7	4	
		4, 5, 6, 8	53	
PDSCH parameters: DL Reference Measurement Channel[Note3]		1, 2, 3, 7	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6, 8	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	

PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note3]		1, 2, 3, 7	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6, 8	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note3]		1, 2, 3, 7	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6, 8	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
PBCH_RA	dB	1, 2, 3, 4, 5, 6, 7, 8	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note4]				
OCNG_RB[Note4]				
N_{oc}[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-98	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	7
$\hat{E}_s/I_{ot}$[Note6]	dB	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	7
RSRP[Note6]	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	-91
SCH_RP[Note6]	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	-91
Io[Note6]	dBm/9MHz	1, 2, 3, 4, 5, 6, 7, 8	-70.22	-62.43
Propagation Condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN	
Antenna Configuration and Correlation Matrix [Note7]		1, 2, 3, 4, 5, 6, 7, 8	1x2 Low	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [23].
Note 3: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 4: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 6: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 7: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].

A.16.3.1.10.2 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 165 ms from the beginning of time period T2.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 50 ms and is specified in clause 6.1.2.1.

$T_{interrupt}$ = 115 ms in the test; $T_{interrupt}$ is defined in clause 6.1.2.1.

This gives a total of 165 ms.

A.16.3.2 RRC Connection Mobility Control

A.16.3.2.1 SA: RRC Re-establishment

A.16.3.2.1.1 Intra-frequency RRC Re-establishment in FR1 for 1 Rx UE

A.16.3.2.1.1.1 Test Purpose and Environment

The purpose is to verify that the NR intra-frequency RRC re-establishment delay in FR1 with known target cell is within the specified limits. These tests will verify the requirements in clause 6.2.1B.

The test parameters are given in table A.16.3.2.1.1.1-1, table A.16.3.2.1.1.1-2 and table A.16.3.2.1.1.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, is deactivated. The time period T3 starts after the occurrence of the radio link failure.

Table A.16.3.2.1.1.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.16.3.2.1.1.1-2: General test parameters for NR intra-frequency RRC Re-establishment test case in FR1 for 1 Rx UE

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4	Cell1	
	Neighbour cells		1, 2, 3, 4	Cell2	
Final condition	Active cell		1, 2, 3, 4	Cell2	
RF Channel Number			1, 2, 3, 4	1	
Time offset between cells			1	3 ms	Asynchronous cells
			2	3 μs	Synchronous cells
			3	3 μs	Synchronous cells
			4	3 ms	Asynchronous cells
N310		-	1, 2, 3, 4	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1, 2, 3, 4	1	Minimum consecutive in-sync indications from lower layers
T310		ms	1, 2, 3, 4	0	Radio link failure timer;
T311		ms	1, 2, 3, 4	3000	RRC re-establishment timer
Access Barring Information		-	1, 2, 3, 4	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR1	
			2	SSB.1 FR1	

		3	SSB.1 RedCap FR1	
		4	SSB.1 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
		4	SMTC.2	
DRX cycle length	s	1, 2, 3, 4	OFF	
PRACH configuration		1, 2, 3, 4	FR1 PRACH configuration 1	Table A.3.8.2.1-1
T1	s	1, 2, 3, 4	5	
T2	ms	1, 2, 3, 4	440	Time for the UE to detect RLF (Summation of $T_{Evaluate_out_SSB}$ defined in clause 8.1B in TS 38.133, T310 and the period for UE turns off transmitter defined in clause 8.1B.5 in TS 38.133)
T3	s	1, 2, 3, 4	2	

Table A.16.3.2.1.1.1-3: Cell specific test parameters for NR intra-frequency RRC Re-establishment test case in FR1 for 1 Rx UE

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
		4	N/A			N/A		
PDSCH RMC configuration		1	SR.1.1 FDD			SR.1.1 FDD		
		2	SR.1.1 TDD			SR.1.1 TDD		
		3	SR.2.1 TDD			SR.2.1 TDD		
		4	SR.1.1 FDD			SR.1.1 FDD		
RMSI CORESET RMC configuration		1	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		
		4	CR.1.1 FDD			CR.1.1 FDD		
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD			CCR.1.1 FDD		
		2	CCR.1.1 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
		4	CCR.1.1 FDD			CCR.1.1 FDD		
OCNG Pattern		1, 2, 3, 4	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
TRS configuration		1	TRS.1.1 FDD			TRS.1.1 FDD		
		2	TRS.1.1 TDD			TRS.1.1 TDD		
		3	TRS.1.2 TDD			TRS.1.2 TDD		
		4	TRS.1.1 FDD			TRS.1.1 FDD		
Initial DL BWP configuration		1, 2, 3, 4	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3, 4	ULBWP.0.1			ULBWP.0.1		
Active DL BWP confgiuration		1, 2, 3, 4	DLBWP.1.1 RedCap	N/A	N/A	N/A	N/A	DLBWP.1.1 RedCap

Active UL BWP configuration		1, 2, 3, 4	ULBWP.1.1 RedCap	N/A	N/A	N/A	N/A	ULBWP.1.1 RedCap
RLM-RS		1, 2, 3, 4	SSB			SSB		
$\hat{E}_s/I_{ot}$	dB	1	1.54	-infinity	-infinity	-3.79	4	4
		2						
		3						
		4						
N_{oc} Note2	dBm/SCS	1	-98					
		2	-98					
		3	-95					
		4	-98					
N_{oc} Note2	dBm/15 kHz	1	-98					
		2						
		3						
		4						
$\hat{E}_s/N_{oc}$	dB	1	7	-infinity	-infinity	4	4	4
		2						
		3						
		4						
SS-RSRP Note3	dBm/SCS	1	-91	-infinity	-infinity	-94	-94	-94
		2	-91	-infinity	-infinity	-94	-94	-94
		3	-88	-infinity	-infinity	-91	-91	-91
		4	-91	-infinity	-infinity	-94	-94	-94
Io	dBm/9.36 MHz	1	-60.74	-64.59	-64.59	-60.74	-64.59	-64.59
	dBm/9.36 MHz	2	-60.74	-64.59	-64.59	-60.74	-64.59	-64.59
	dBm/18.36 MHz	3	-57.81	-61.66	-61.66	-57.81	-61.66	-61.66
	dBm/9.36 MHz	4	-60.74	-64.59	-64.59	-60.74	-64.59	-64.59
Propagation Condition		1, 2, 3, 4	AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.16.3.2.1.1.2 Test Requirements

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to a known NR intra frequency cell shall be less than 1.6 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{re\text{-}establish_delay} = T_{UL_grant} + T_{UE_re\text{-}establish_delay}.$$

Where:

T_{UL_grant} = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence T_{UL_grant} is not used.

$T_{UE_re-establish_delay} = 50 \text{ ms} + T_{identify_intra_NR} + \sum_{i=1}^{Nfreq-1} T_{identify_inter_NR,i} + T_{SI-NR} + T_{PRACH}$

$N_{freq} = 1$

$T_{identify_intra_NR}$ = 200 ms

T_{SI} = 1280 ms; it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target intra-frequency NR cell.

T_{PRACH} = 15 ms; it is the additional delay caused by the random access procedure.

This gives a total of 1545 ms, allow 1.6 s in the test case.

A.16.3.2.1.2 Intra-frequency RRC Re-establishment in FR1 for 2 Rx UE

A.16.3.2.1.2.1 Test Purpose and Environment

The purpose is to verify that the NR intra-frequency RRC re-establishment delay in FR1 with known target cell is within the specified limits. These tests will verify the requirements in clause 6.2.1B.

The test parameters are given in table A.16.3.2.1.2.1-1, table A.16.3.2.1.2.1-2 and table A.16.3.2.1.2.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, is deactivated. The time period T3 starts after the occurrence of the radio link failure.

Table A.16.3.2.1.2.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.16.3.2.1.2.1-2: General test parameters for NR intra-frequency RRC Re-establishment test case in FR1

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4	Cell1	
	Neighbour cells		1, 2, 3, 4	Cell2	
Final condition	Active cell		1, 2, 3, 4	Cell2	
RF Channel Number			1, 2, 3, 4	1	
Time offset between cells			1	3 ms	Asynchronous cells
			2	3 µs	Synchronous cells
			3	3 µs	Synchronous cells
			4	3 ms	Asynchronous cells
N310		-	1, 2, 3, 4	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1, 2, 3, 4	1	Minimum consecutive in-sync indications from lower layers
T310		ms	1, 2, 3, 4	0	Radio link failure timer;

T311	ms	1, 2, 3, 4	3000	RRC re-establishment timer
Access Barring Information	-	1, 2, 3, 4	Not Sent	No additional delays in random access procedure.
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.1 RedCap FR1	
		4	SSB.1 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
		4	SMTC.2	
DRX cycle length	s	1, 2, 3, 4	OFF	
PRACH configuration		1, 2, 3, 4	FR1 PRACH configuration 1	Table A.3.8.2.1-1
T1	s	1, 2, 3, 4	5	
T2	ms	1, 2, 3, 4	240	Time for the UE to detect RLF (Summation of $T_{Evaluate_out_SSB}$ defined in clause 8.1B in TS 38.133, T310 and the period for UE turns off transmitter defined in clause 8.1B.5 in TS 38.133)
T3	s	1, 2, 3, 4	2	

Table A.16.3.2.1.2.1-3: Cell specific test parameters for NR intra-frequency RRC Re-establishment test case in FR1

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
		4	N/A			N/A		
PDSCH RMC configuration		1	SR.1.1 FDD			SR.1.1 FDD		
		2	SR.1.1 TDD			SR.1.1 TDD		
		3	SR.2.1 TDD			SR.2.1 TDD		
		4	SR.1.1 FDD			SR.1.1 FDD		
RMSI CORESET RMC configuration		1	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		
		4	CR.1.1 FDD			CR.1.1 FDD		
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD			CCR.1.1 FDD		
		2	CCR.1.1 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
		4	CCR.1.1 FDD			CCR.1.1 FDD		
OCNG Pattern		1, 2, 3, 4	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
TRS configuration		1	TRS.1.1 FDD			TRS.1.1 FDD		
		2	TRS.1.1 TDD			TRS.1.1 TDD		
		3	TRS.1.2 TDD			TRS.1.2 TDD		
		4	TRS.1.1 FDD			TRS.1.1 FDD		
Initial DL BWP configuration		1, 2, 3, 4	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3, 4	ULBWP.0.1			ULBWP.0.1		

Active DL BWP confgiuration		1, 2, 3, 4	DLBWP.1.1 RedCap	N/A	N/A	N/A	N/A	DLBWP.1.1 RedCap
Active UL BWP configuration		1, 2, 3, 4	ULBWP.1.1 RedCap	N/A	N/A	N/A	N/A	ULBWP.1.1 RedCap
RLM-RS		1, 2, 3, 4	SSB			SSB		
$\hat{E}_s/I_{ot}$	dB	1	1.54	-infinity	-infinity	-3.79	4	4
		2						
		3						
		4						
N_{oc} Note2	dBm/SCS	1	-98					
		2	-98					
		3	-95					
		4	-98					
N_{oc} Note2	dBm/15 kHz	1	-98					
		2						
		3						
		4						
$\hat{E}_s/N_{oc}$	dB	1	7	-infinity	-infinity	4	4	4
		2						
		3						
		4						
SS-RSRP Note3	dBm/SCS	1	-91	-infinity	-infinity	-94	-94	-94
		2	-91	-infinity	-infinity	-94	-94	-94
		3	-88	-infinity	-infinity	-91	-91	-91
		4	-91	-infinity	-infinity	-94	-94	-94
Io	dBm/9.36 MHz	1	-60.74	-64.59	-64.59	-60.74	-64.59	-64.59
	dBm/9.36 MHz	2	-60.74	-64.59	-64.59	-60.74	-64.59	-64.59
	dBm/18.36 MHz	3	-57.81	-61.66	-61.66	-57.81	-61.66	-61.66
	dBm/9.36 MHz	4	-60.74	-64.59	-64.59	-60.74	-64.59	-64.59
Propagation Condition		1, 2, 3, 4	AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.16.3.2.1.2.2 Test Requirements

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to a known NR intra frequency cell shall be less than 1.6 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{re\text{-}establish_delay} = T_{UL_grant} + T_{UE_re\text{-}establish_delay}.$$

Where:

T_{UL_grant} = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence T_{UL_grant} is not used.

$T_{UE_re-establish_delay} = 50 \text{ ms} + T_{identify_intra_NR} + \sum_{i=1}^{Nfreq-1} T_{identify_inter_NR,i} + T_{SI-NR} + T_{PRACH}$

$N_{freq} = 1$

$T_{identify_intra_NR} = 200$ ms

T_{SI} = 1280 ms; it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target intra-frequency NR cell.

T_{PRACH} = 15 ms; it is the additional delay caused by the random access procedure.

This gives a total of 1545 ms, allow 1.6 s in the test case.

A.16.3.2.1.3 Inter-frequency RRC Re-establishment in FR1 for 1 Rx UE

A.16.3.2.1.3.1 Test Purpose and Environment

The purpose is to verify that the NR inter-frequency RRC re-establishment delay in FR1 without known target cell is within the specified limits. These tests will verify the requirements in clause 6.2.1B.

The test parameters are given in table A.16.3.2.1.3.1-1, table A.16.3.2.1.3.1-2 and table A.16.3.2.1.3.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, becomes inactive. The time period T3 starts after the occurrence of the radio link failure. During T1, the UE shall be configured with the carrier frequency of cell 2 (with RF Channel Number #2) to ensure that the UE has the context of the carrier frequency of cell 2 by the end of T1.

Table A.16.3.2.1.3.1-1: Supported test configurations

Configuration	Description of serving cell	Description of target cell
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.16.3.2.1.3.1-2: General test parameters for NR inter-frequency RRC Re-establishment test case in FR1 for 1 Rx UE

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4	Cell1	
	Neighbour cells		1, 2, 3, 4	Cell2	
Final condition	Active cell		1, 2, 3, 4	Cell2	
RF Channel Number			1, 2, 3, 4	1, 2	

Time offset between cells		1	3 ms	Asynchronous cells
		2	3 μs	Synchronous cells
		3	3 μs	Synchronous cells
		4	3 ms	Asynchronous cells
N310	-	1, 2, 3, 4	1	Maximum consecutive out-of-sync indications from lower layers
N311	-	1, 2, 3, 4	1	Minimum consecutive in-sync indications from lower layers
T310	ms	1, 2, 3, 4	0	Radio link failure timer;
T311	ms	1, 2, 3, 4	5000	RRC re-establishment timer
Access Barring Information	-	1, 2, 3, 4	Not Sent	No additional delays in random access procedure.
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.1 RedCap FR1	
		4	SSB.1 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
		4	SMTC.2	
DRX cycle length	S	1, 2, 3, 4	OFF	
PRACH configuration		1, 2, 3, 4	FR1 PRACH configuration 1	Table A.3.8.2.1-1
T1	S	1, 2, 3, 4	5	
T2	ms	1, 2, 3, 4	440	Time for the UE to detect RLF (Summation of $T_{Evaluate_out_SSB}$ defined in clause 8.1B in TS 38.133, T310 and the period for UE turns off transmitter defined in clause 8.1B.5 in TS 38.133)
T3	S	1, 2, 3, 4	5	

Table A.16.3.2.1.3.1-3: Cell specific test parameters for NR inter-frequency RRC Re-establishment test case in FR1

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
RF Channel Number		1, 2, 3, 4	1			2		
TDD configuration		1	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
		4	N/A			N/A		
PDSCH RMC configuration		1	SR.1.1 FDD			SR.1.1 FDD		
		2	SR.1.1 TDD			SR.1.1 TDD		
		3	SR.2.1 TDD			SR.2.1 TDD		
		4	SR.1.1 FDD			SR.1.1 FDD		
RMSI CORESET RMC configuration		1	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		
		4	CR.1.1 FDD			CR.1.1 FDD		
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD			CCR.1.1 FDD		
		2	CCR.1.1 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		

		4	CCR.1.1 FDD			CCR.1.1 FDD			
OCNG Pattern		1, 2, 3, 4	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1			
TRS configuration		1	TRS.1.1 FDD			TRS.1.1 FDD			
		2	TRS.1.1 TDD			TRS.1.1 TDD			
		3	TRS.1.2 TDD			TRS.1.2 TDD			
		4	TRS.1.2 TDD			TRS.1.2 TDD			
Initial DL BWP configuration		1, 2, 3, 4	DLBWP.0.1			DLBWP.0.1			
Initial UL BWP configuration		1, 2, 3, 4	ULBWP.0.1			ULBWP.0.1			
Active DL BWP confgiuration		1, 2, 3, 4	DLBWP.1.1 RedCap	N/A	N/A	N/A	N/A	DLBWP.1.1 RedCap	
Active UL BWP configuration		1, 2, 3, 4	ULBWP.1.1 RedCap	N/A	N/A	N/A	N/A	ULBWP.1.1 RedCap	
RLM-RS		1, 2, 3, 4	SSB			SSB			
$\hat{E}_s/I_{ot}$	dB	1	4	-infinity	-infinity	-infinity	-infinity	-infinity	7
		2							
		3							
		4							
N_{oc} Note2	dBm/SCS	1	-98						
		2	-98						
		3	-95						
		4	-98						
N_{oc} Note2	dBm/15 kHz	1	-98						
		2							
		3							
		4							
$\hat{E}_s/N_{oc}$	dB	1	4	-infinity	-infinity	-infinity	-infinity	-infinity	7
		2							
		3							
		4							
SS-RSRP Note3	dBm/SCS	1	-94	-infinity	-infinity	-infinity	-infinity	-91	
		2	-94	-infinity	-infinity	-infinity	-infinity	-91	
		3	-91	-infinity	-infinity	-infinity	-infinity	-88	
		4	-94	-infinity	-infinity	-infinity	-infinity	-91	
Io	dBm/9.36 MHz	1	-64.59	-70.05	-70.05	-70.05	-70.05	-62.26	
	dBm/9.36 MHz	2	-64.59	-70.05	-70.05	-70.05	-70.05	-62.26	
	dBm/18.36 MHz	3	-61.66	-67.12	-67.12	-67.12	-67.12	-59.33	
	dBm/9.36 MHz	4	-64.59	-70.05	-70.05	-70.05	-70.05	-62.26	
Propagation Condition		1, 2, 3, 4	AWGN						

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.16.3.2.1.3.2 Test Requirements

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to an unknown NR inter frequency cell shall be less than 3 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{re\text{-}establish_delay} = T_{UL_grant} + T_{UE_re\text{-}establish_delay}.$$

Where:

T_{UL_grant} = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence T_{UL_grant} is not used.

$$T_{UE_re-establish_delay} = 50\ ms + T_{identify_intra_NR} + \sum_{i=1}^{Nfreq-1} T_{identify_inter_NR,i} + T_{SI-NR} + T_{PRACH}$$

N_{freq} = 2

$T_{identify_intra_NR}$ = 800 ms

$T_{identify_inter_NR}$ = 800 ms

T_{SI} = 1280 ms; it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target inter-frequency NR cell.

T_{PRACH} = 15 ms; it is the additional delay caused by the random access procedure.

This gives a total of 2945 ms, allow 3 s in the test case.

A.16.3.2.1.4 Inter-frequency RRC Re-establishment in FR1 for 2 Rx UE

A.16.3.2.1.4.1 Test Purpose and Environment

The purpose is to verify that the NR inter-frequency RRC re-establishment delay in FR1 without known target cell is within the specified limits. These tests will verify the requirements in clause 6.2.1B.

The test parameters are given in table A.16.3.2.1.4.1-1, table A.16.3.2.1.4.1-2 and table A.16.3.2.1.4.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, becomes inactive. The time period T3 starts after the occurrence of the radio link failure. During T1, the UE shall be configured with the carrier frequency of cell 2 (with RF Channel Number #2) to ensure that the UE has the context of the carrier frequency of cell 2 by the end of T1.

Table A.16.3.2.1.4.1-1: Supported test configurations

Configuration	Description of serving cell	Description of target cell
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.16.3.2.1.4.1-2: General test parameters for NR inter-frequency RRC Re-establishment test case in FR1 for 2 Rx UE

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4	Cell1	
	Neighbour cells		1, 2, 3, 4	Cell2	
Final condition	Active cell		1, 2, 3, 4	Cell2	
RF Channel Number			1, 2, 3, 4	1, 2	
Time offset between cells			1	3 ms	Asynchronous cells
			2	3 μs	Synchronous cells
			3	3 μs	Synchronous cells
			4	3 ms	Asynchronous cells
N310		-	1, 2, 3, 4	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1, 2, 3, 4	1	Minimum consecutive in-sync indications from lower layers
T310		ms	1, 2, 3, 4	0	Radio link failure timer;
T311		ms	1, 2, 3, 4	5000	RRC re-establishment timer
Access Barring Information		-	1, 2, 3, 4	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.1 RedCap FR1	
			4	SSB.1 FR1	
SMTC configuration			1	SMTC.2	
			2	SMTC.1	
			3	SMTC.1	
			4	SMTC.2	
DRX cycle length		S	1, 2, 3, 4	OFF	
PRACH configuration			1, 2, 3, 4	FR1 PRACH configuration 1	Table A.3.8.2.1-1
T1		S	1, 2, 3, 4	5	
T2		ms	1, 2, 3, 4	240	Time for the UE to detect RLF (Summation of $T_{Evaluate_out_SSB}$ defined in clause 8.1B in TS 38.133, T310 and the period for UE turns off transmitter defined in clause 8.1B.5 in TS 38.133)
T3		S	1, 2, 3, 4	5	

Table A.16.3.2.1.4.1-3: Cell specific test parameters for NR inter-frequency RRC Re-establishment test case in FR1 for 2 Rx UE

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
RF Channel Number		1, 2, 3, 4	1			2		
TDD configuration		1	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
		4	N/A			N/A		
		1	SR.1.1 FDD			SR.1.1 FDD		

PDSCH RMC configuration		2	SR.1.1 TDD			SR.1.1 TDD		
		3	SR.2.1 TDD			SR.2.1 TDD		
		4	SR.1.1 FDD			SR.1.1 FDD		
RMSI CORESET RMC configuration		1	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		
		4	CR.1.1 FDD			CR.1.1 FDD		
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD			CCR.1.1 FDD		
		2	CCR.1.1 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
		4	CCR.1.1 FDD			CCR.1.1 FDD		
OCNG Pattern		1, 2, 3, 4	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
TRS configuration		1	TRS.1.1 FDD			TRS.1.1 FDD		
		2	TRS.1.1 TDD			TRS.1.1 TDD		
		3	TRS.1.2 TDD			TRS.1.2 TDD		
		4	TRS.1.1 FDD			TRS.1.1 FDD		
Initial DL BWP configuration		1, 2, 3, 4	DLBWP.0.1 RedCap			DLBWP.0.1 RedCap		
Initial UL BWP configuration		1, 2, 3, 4	ULBWP.0.1 RedCap			ULBWP.0.1 RedCap		
Active DL BWP confgiuration		1, 2, 3, 4	DLBWP.1.1	N/A	N/A	N/A	N/A	DLBWP.1.1
Active UL BWP configuration		1, 2, 3, 4	ULBWP.1.1	N/A	N/A	N/A	N/A	ULBWP.1.1
RLM-RS		1, 2, 3, 4	SSB			SSB		
$\hat{E}_s/I_{ot}$	dB	1	4	-infinity	-infinity	-infinity	-infinity	7
		2						
		3						
		4						
N_{oc} Note2	dBm/SCS	1	-98					
		2	-98					
		3	-95					
		4	-98					
N_{oc} Note2	dBm/15 kHz	1	-98					
		2						
		3						
		4						
$\hat{E}_s/N_{oc}$	dB	1	4	-infinity	-infinity	-infinity	-infinity	7
		2						
		3						
		4						
SS-RSRP Note3	dBm/SCS	1	-94	-infinity	-infinity	-infinity	-infinity	-91
		2	-94	-infinity	-infinity	-infinity	-infinity	-91
		3	-91	-infinity	-infinity	-infinity	-infinity	-88
		4	-94	-infinity	-infinity	-infinity	-infinity	-91
Io	dBm/9.36 MHz	1	-64.59	-70.05	-70.05	-70.05	-70.05	-62.26
	dBm/9.36 MHz	2	-64.59	-70.05	-70.05	-70.05	-70.05	-62.26
	dBm/18.36 MHz	3	-61.66	-67.12	-67.12	-67.12	-67.12	-59.33
	dBm/9.36 MHz	4	-64.59	-70.05	-70.05	-70.05	-70.05	-62.26
Propagation Condition		1, 2, 3, 4	AWGN					

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.16.3.2.1.4.2 Test Requirements

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to an unknown NR inter frequency cell shall be less than 3 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{re\text{-}establish_delay} = T_{UL_grant} + T_{UE_re\text{-}establish_delay}.$$

Where:

T_{UL_grant} = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence T_{UL_grant} is not used.

$$T_{UE_re-establish_delay} = 50\,ms + T_{identify_intra_NR} + \sum_{i=1}^{Nfreq-1} T_{identify_inter_NR,i} + T_{SI-NR} + T_{PRACH}$$

N_{freq} = 2

$T_{identify_intra_NR}$ = 800 ms

$T_{identify_inter_NR}$ = 800 ms

T_{SI} = 1280 ms; it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target inter-frequency NR cell.

T_{PRACH} = 15 ms; it is the additional delay caused by the random access procedure.

This gives a total of 2945 ms, allow 3 s in the test case.

A.16.3.2.1.5 Intra-frequency RRC Re-establishment in FR1 for 1 Rx UE without serving cell timing

A.16.3.2.1.5.1 Test Purpose and Environment

The purpose is to verify that the NR intra-frequency RRC re-establishment delay in FR1 without serving cell timing is within the specified limits. These tests will verify the requirements in clause 6.2.1B.

The test parameters are given in table A.16.3.2.1.5.1-1, table A.16.3.2.1.5.1-2 and table A.16.3.2.1.5.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, is deactivated. The time period T3 starts after the occurrence of the radio link failure.

Table A.16.3.2.1.5.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode

4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.16.3.2.1.5.1-2: General test parameters for NR intra-frequency RRC Re-establishment test case in FR1

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4	Cell1	
	Neighbour cells		1, 2, 3, 4	Cell2	
Final condition	Active cell		1, 2, 3, 4	Cell2	
RF Channel Number			1, 2, 3, 4	1	
Time offset between cells			1	3 ms	Asynchronous cells
			2	3 μs	Synchronous cells
			3	3 μs	Synchronous cells
			4	3 ms	Asynchronous cells
N310		-	1, 2, 3, 4	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1, 2, 3, 4	1	Minimum consecutive in-sync indications from lower layers
T310		ms	1, 2, 3, 4	6000	Radio link failure timer configured by *RLF-TimersAndConstants*
T311		ms	1, 2, 3, 4	3000	RRC re-establishment timer
Access Barring Information		-	1, 2, 3, 4	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.1 RedCap FR1	
			4	SSB.1 FR1	
SMTC configuration			1	SMTC.2	
			2	SMTC.1	
			3	SMTC.1	
			4	SMTC.2	
DRX cycle length		s	1, 2, 3, 4	OFF	
PRACH configuration			1, 2, 3, 4	FR1 PRACH configuration 1	Table A.3.8.2.1-1
T1		s	1, 2, 3, 4	5	
T2		s	1, 2, 3, 4	6.24	Time for the UE to detect RLF (Summation of $T_{Evaluate_out_SSB}$ defined in clause 8.1B in TS 38.133, T310 and the period for UE turns off transmitter defined in clause 8.1B.5 in TS 38.133)
T3		s	1, 2, 3, 4	3	

Table A.16.3.2.1.5.1-3: Cell specific test parameters for NR intra-frequency RRC Re-establishment test case in FR1

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1	N/A			N/A		

		2	TDDConf.1.1			TDDConf.1.1			
		3	TDDConf.2.1			TDDConf.2.1			
		4	N/A			N/A			
PDSCH RMC configuration		1	SR.1.1 FDD			SR.1.1 FDD			
		2	SR.1.1 TDD			SR.1.1 TDD			
		3	SR.2.1 TDD			SR.2.1 TDD			
		4	SR.1.1 FDD			SR.1.1 FDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD			CR.1.1 FDD			
		2	CR.1.1 TDD			CR.1.1 TDD			
		3	CR.2.1 TDD			CR.2.1 TDD			
		4	CR.1.1 FDD			CR.1.1 FDD			
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD			CCR.1.1 FDD			
		2	CCR.1.1 TDD			CCR.1.1 TDD			
		3	CCR.2.1 TDD			CCR.2.1 TDD			
		4	CCR.1.1 FDD			CCR.1.1 FDD			
OCNG Pattern		1, 2, 3, 4	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1			
Initial DL BWP configuration		1, 2, 3, 4	DLBWP.0.1			DLBWP.0.1			
TRS Configuration		1	TRS.1.1.FDD			TRS.1.1.FDD			
		2	TRS.1.1.TDD			TRS.1.1.TDD			
		3	TRS.1.2.TDD			TRS.1.2.TDD			
		4	TRS.1.1.FDD			TRS.1.1.FDD			
Initial UL BWP configuration		1, 2, 3, 4	ULBWP.0.1 RedCap			ULBWP.0.1 RedCap			
RLM-RS		1, 2, 3, 4	SSB			SSB			
$\hat{E}_s/I_{ot}$	dB	1	4	-infinity	-infinity	-infinity	-infinity	4	
		2							
		3							
		4							
N_{oc} Note2	dBm/SCS	1	-98						
		2	-98						
		3	-95						
		4	-98						
N_{oc} Note2	dBm/15 kHz	1	-98						
		2							
		3							
		4							
$\hat{E}_s/N_{oc}$	dB	1	4	-infinity	-infinity	-infinity	-infinity	4	
		2							
		3							
		4							
SS-RSRP Note3	dBm/SCS	1	-94	-infinity	-infinity	-infinity	-infinity	-94	
		2	-94	-infinity	-infinity	-infinity	-infinity	-94	
		3	-91	-infinity	-infinity	-infinity	-infinity	-91	
		4	-94	-infinity	-infinity	-infinity	-infinity	-94	
Io	dBm/9.36 MHz	1	-64.59	-70.05	-70.05	-70.05	-70.05	-64.59	
	dBm/9.36 MHz	2	-64.59	-70.05	-70.05	-70.05	-70.05	-64.59	
	dBm/18.36 MHz	3	-61.66	-67.12	-67.12	-67.12	-67.12	-61.66	
	dBm/9.36 MHz	4	-64.59	-70.05	-70.05	-70.05	-70.05	-64.59	
Propagation Condition		1, 2, 3, 4	AWGN						

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.16.3.2.1.5.2 Test Requirements

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to an unknown NR intra frequency cell without serving cell timing shall be less than 2.2 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{re\text{-}establish_delay} = T_{UL_grant} + T_{UE_re\text{-}establish_delay}.$$

Where:

T_{UL_grant} = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence T_{UL_grant} is not used.

$$T_{UE_re-establish_delay} = 50 \text{ ms} + T_{identify_intra_NR} + \sum_{i=1}^{Nfreq-1} T_{identify_inter_NR,i} + T_{SI-NR} + T_{PRACH}$$

$N_{freq} = 1$

$T_{identify_intra_NR} = 800$ ms

$T_{SI} = 1280$ ms; it is the time required for receiving all the relevant system information as defined in TS 38.331 [2] for the target intra-frequency NR cell.

$T_{PRACH} = 15$ ms; it is the additional delay caused by the random access procedure.

This gives a total of 2145 ms, allow 2.2 s in the test case.

A.16.3.2.1.6 Intra-frequency RRC Re-establishment in FR1 for 2 Rx UE without serving cell timing

A.16.3.2.1.6.1 Test Purpose and Environment

The purpose is to verify that the NR intra-frequency RRC re-establishment delay in FR1 without serving cell timing is within the specified limits. These tests will verify the requirements in clause 6.2.1B.

The test parameters are given in table A.16.3.2.1.6.1-1, table A.16.3.2.1.6.1-2 and table A.16.3.2.1.6.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, is deactivated. The time period T3 starts after the occurrence of the radio link failure.

Table A.16.3.2.1.6.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode

4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.16.3.2.1.6.1-2: General test parameters for NR intra-frequency RRC Re-establishment test case in FR1

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4	Cell1	
	Neighbour cells		1, 2, 3, 4	Cell2	
Final condition	Active cell		1, 2, 3, 4	Cell2	
RF Channel Number			1, 2, 3, 4	1	
Time offset between cells			1	3 ms	Asynchronous cells
			2	3 μs	Synchronous cells
			3	3 μs	Synchronous cells
			4	3 ms	Asynchronous cells
N310		-	1, 2, 3, 4	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1, 2, 3, 4	1	Minimum consecutive in-sync indications from lower layers
T310		ms	1, 2, 3, 4	6000	Radio link failure timer configured by *RLF-TimersAndConstants*
T311		ms	1, 2, 3, 4	3000	RRC re-establishment timer
Access Barring Information		-	1, 2, 3, 4	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.1 RedCap FR1	
			4	SSB.1 FR1	
SMTC configuration			1	SMTC.2	
			2	SMTC.1	
			3	SMTC.1	
			4	SMTC.2	
DRX cycle length		s	1, 2, 3, 4	OFF	
PRACH configuration			1, 2, 3, 4	FR1 PRACH configuration 1	Table A.3.8.2.1-1
T1		s	1, 2, 3, 4	5	
T2		s	1, 2, 3, 4	6.24	Time for the UE to detect RLF (Summation of $T_{Evaluate_out_SSB}$ defined in clause 8.1B in TS 38.133, T310 and the period for UE turns off transmitter defined in clause 8.1B.5 in TS 38.133)
T3		s	1, 2, 3, 4	3	

Table A.16.3.2.1.6.1-3: Cell specific test parameters for NR intra-frequency RRC Re-establishment test case in FR1

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1	N/A			N/A		

		2	TDDConf.1.1			TDDConf.1.1			
		3	TDDConf.2.1			TDDConf.2.1			
		4	N/A			N/A			
PDSCH RMC configuration		1	SR.1.1 FDD			SR.1.1 FDD			
		2	SR.1.1 TDD			SR.1.1 TDD			
		3	SR.2.1 TDD			SR.2.1 TDD			
		4	SR.1.1 FDD			SR.1.1 FDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD			CR.1.1 FDD			
		2	CR.1.1 TDD			CR.1.1 TDD			
		3	CR.2.1 TDD			CR.2.1 TDD			
		4	CR.1.1 FDD			CR.1.1 FDD			
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD			CCR.1.1 FDD			
		2	CCR.1.1 TDD			CCR.1.1 TDD			
		3	CCR.2.1 TDD			CCR.2.1 TDD			
		4	CCR.1.1 FDD			CCR.1.1 FDD			
OCNG Pattern		1, 2, 3, 4	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1			
Initial DL BWP configuration		1, 2, 3, 4	DLBWP.0.1 RedCap			DLBWP.0.1 RedCap			
TRS Configuration		1	TRS.1.1.FDD			TRS.1.1.FDD			
		2	TRS.1.1.TDD			TRS.1.1.TDD			
		3	TRS.1.2.TDD			TRS.1.2.TDD			
		4	TRS.1.1.FDD			TRS.1.1.FDD			
Initial UL BWP configuration		1, 2, 3, 4	ULBWP.0.1 RedCap			ULBWP.0.1 RedCap			
RLM-RS		1, 2, 3, 4	SSB			SSB			
$\hat{E}_s/I_{ot}$	dB	1	4	-infinity	-infinity	-infinity	-infinity	4	
		2							
		3							
		4							
N_{oc} Note2	dBm/SCS	1	-98						
		2	-98						
		3	-95						
		4							
N_{oc} Note2	dBm/15 kHz	1	-98						
		2							
		3							
		4							
$\hat{E}_s/N_{oc}$	dB	1	4	-infinity	-infinity	-infinity	-infinity	4	
		2							
		3							
		4							
SS-RSRP Note3	dBm/SCS	1	-94	-infinity	-infinity	-infinity	-infinity	-94	
		2	-94	-infinity	-infinity	-infinity	-infinity	-94	
		3	-91	-infinity	-infinity	-infinity	-infinity	-91	
		4	-94	-infinity	-infinity	-infinity	-infinity	-94	
Io	dBm/9.36 MHz	1	-64.59	-70.05	-70.05	-70.05	-70.05	-64.59	
	dBm/9.36 MHz	2	-64.59	-70.05	-70.05	-70.05	-70.05	-64.59	
	dBm/18.36 MHz	3	-61.66	-67.12	-67.12	-67.12	-67.12	-61.66	
	dBm/9.36 MHz	4	-64.59	-70.05	-70.05	-70.05	-70.05	-64.59	
Propagation Condition		1, 2, 3, 4	AWGN						

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.16.3.2.1.6.2 Test Requirements

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to an unknown NR intra frequency cell without serving cell timing shall be less than 2.2 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{re\text{-}establish_delay} = T_{UL_grant} + T_{UE_re\text{-}establish_delay}.$$

Where:

T_{UL_grant} = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence T_{UL_grant} is not used.

$$T_{UE_re-establish_delay} = 50 \text{ ms} + T_{identify_intra_NR} + \sum_{i=1}^{Nfreq-1} T_{identify_inter_NR,i} + T_{SI-NR} + T_{PRACH}$$

$N_{freq} = 1$

$T_{identify_intra_NR} = 800$ ms

$T_{SI} = 1280$ ms; it is the time required for receiving all the relevant system information as defined in TS 38.331 [2] for the target intra-frequency NR cell.

$T_{PRACH} = 15$ ms; it is the additional delay caused by the random access procedure.

This gives a total of 2145 ms, allow 2.2 s in the test case.

A.16.3.2.2 Random Access

A.16.3.2.2.1 4-step RA type contention based random access test in FR1 for NR standalone for 1 Rx UE

A.16.3.2.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in Clause 6.2.2B.2 and Clause 7.1A.2 in an AWGN model.

For this test one cell is used and configured as PCell in FR1. Supported test parameters are shown in Table A.16.3.2.2.1.1-1. UE capable of SA with PCell in FR1 needs to be tested by using the parameters in Table A.16.3.2.2.1.1-2.

Table A.16.3.2.2.1.1-1: Supported test configurations for contention based random access test in FR1 for NR standalone

Config	Description

1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations depending on UE capability	

Table A.16.3.2.2.1.1-2: General test parameters for contention based random access test in FR1 for NR Standalone

Parameter		Unit	Test-1	Comments
SSB Configuration	Config 1,4		SSB pattern 1 in FR1	As defined in A.3.10 and A.3.10B, except for number of SSBs per SS-burst and SS/PBCH block index as below
	Config 2		SSB pattern 1 in FR1	
	Config 3		SSB pattern 1 for RedCap in FR1	
Number of SSBs per SS-burst			2	Different from the definition in A.3.10 and A.3.10B
SS/PBCH block index			0,1	Different from the definition in A.3.10 and A.3.10B
Duplex Mode for Cell 1	Config 1		FDD	
	Config 2,3		TDD	
	Config 4		HD-FDD	
TDD Configuration	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
CSI-RS for tracking	Config 1,4		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
OCNG Pattern Note 1			OP.1	As defined in A.3.2.1.
PDSCH parameters Note 4	Config 1,4		SR.1.1 FDD	As defined in A.3.1.1.
	Config 2		SR.1.1 TDD	
	Config 3		SR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1,4		CCR.1.1 FDD	
	Config 2		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD	
NR RF Channel Number			1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH_DMRS to SSS		dB		
EPRE ratio of PBCH to PBCH_DMRS		dB		
EPRE ratio of PDCCH_DMRS to SSS		dB		
EPRE ratio of PDCCH to PDCCH_DMRS		dB		
EPRE ratio of PDSCH_DMRS to SSS		dB		
EPRE ratio of PDSCH to PDSCH_DMRS		dB		
SSB with index 0	$\hat{E}_s / I_{ot}$	dB	3	Power of SSB with index 0 is set to be above configured *rsrp-ThresholdSSB*+[1]
	N_{oc} Config 1,4	dBm/15kHz	-98	

		Config 2		-98	
		Config 3		-101	
	$\hat{E}_s/N_{oc}$		dB	3	
	SS-RSRP Note 3		dBm/ SCS	-95	
SSB with index 1	$\hat{E}_s/I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured *rsrp-ThresholdSSB*+[1]
	N_{oc}	Config 1,4	dBm/15kHz	-98	
		Config 2		-98	
		Config 3		-101	
	$\hat{E}_s/N_{oc}$		dB	-17	
	SS-RSRP Note 3		dBm/ SCS	-115	
Io Note 2		Config 1,4	dBm	-65.3/9.36MHz	For symbols without SSB index 1
		Config 2		-65.3/9.36MHz	
		Config 3		-65.38/18.36MHz	
ss-PBCH-BlockPower			dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [2].
Configured UE transmitted power ($P_{CMAX,\ f,c}$)			dBm	23	As defined in clause 6.2.4 in TS 38.101-1.
PRACH Configuration				FR1 PRACH configuration 1	As defined in A.3.8.
Propagation Condition			-	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.
Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.
Note 3: Void
Note 4: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.

A.16.3.2.2.1.2 Test Requirements

Contention based random access is triggered by *not* explicitly assigning a random access preamble via dedicated signalling in the downlink.

A.16.3.2.2.1.2.1 Random Access Preamble Transmission

To test the UE behavior specified in Clause 6.2.2.2.1.1 the System Simulator shall receive the Random Access Preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SS-RSRP above the configured *rsrp-ThresholdSSB*+[1].

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.16.3.2.2.1.2.2 Random Access Response Reception

To test the UE behavior specified in Clause 6.2.2.2.1.2 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the

System Simulator shall transmit a Random Access Response *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for Random Access Response(s) and shall transmit the msg3 if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.16.3.2.2.1.2.3 No Random Access Response Reception

To test the UE behavior specified in clause 6.2.2.2.1.3 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.16.3.2.2.1.2.4 Receiving an UL grant for msg3 retransmission

To test the UE behavior specified in clause 6.2.2.2.1.4 the System Simulator shall provide an UL grant for msg3 retransmission following a successful Random Access Response.

The UE shall re-transmit the msg3 upon the reception of an UL grant for msg3 retransmission.

A.16.3.2.2.1.2.5 Reception of an Incorrect Message over Temporary C-RNTI

To test the UE behavior specified in Clause 6.2.2.2.1.5 the System Simulator shall send a message addressed to the temporary C-RNTI with a UE Contention Resolution Identity included in the MAC control element *not* matching the CCCH SDU transmitted in msg3 uplink message.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires unless the received message includes a UE Contention Resolution Identity MAC control element and the UE Contention Resolution Identity included in the MAC control element matches the CCCH SDU transmitted in the uplink message.

A.16.3.2.2.1.2.6 Reception of a Correct Message over Temporary C-RNTI

To test the UE behavior specified in Clause 6.2.2.2.1.5 the System Simulator shall send a message addressed to the temporary C-RNTI with a UE Contention Resolution Identity included in the MAC control element matching the CCCH SDU transmitted in the msg3 uplink message.

The UE shall send ACK if the Contention Resolution is successful.

A.16.3.2.2.1.2.7 Contention Resolution Timer expiry

To test the UE behavior specified in Clause 6.2.2.2.1.6 the System Simulator shall *not* send a response to a msg3.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if the Contention Resolution Timer expires.

A.16.3.2.2.2 4-step RA type contention based random access test in FR1 for NR standalone for 2 Rx UE

A.16.3.2.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in Clause 6.2.2B.2 and Clause 7.1A.2 in an AWGN model.

For this test one cell is used and configured as PCell in FR1. Supported test parameters are shown in Table A.16.3.2.2.2.1-1. UE capable of SA with PCell in FR1 needs to be tested by using the parameters in Table A.16.3.2.2.2.1-2.

Table A.16.3.2.2.2.1-1: Supported test configurations for contention based random access test in FR1 for NR standalone

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations depending on UE capability	

Table A.16.3.2.2.2.1-2: General test parameters for contention based random access test in FR1 for NR Standalone

Parameter		Unit	Test-1	Comments
SSB Configuration	Config 1,4		SSB pattern 1 in FR1	As defined in A.3.10 and A.3.10B, except for number of SSBs per SS-burst and SS/PBCH block index as below
	Config 2		SSB pattern 1 in FR1	
	Config 3		SSB pattern 1 for RedCap in FR1	
Number of SSBs per SS-burst			2	Different from the definition in A.3.10 and A.3.10B
SS/PBCH block index			0,1	Different from the definition in A.3.10 and A.3.10B
Duplex Mode for Cell 1	Config 1,4		FDD	

		Config 2,3		TDD	
TDD Configuration		Config 2		TDDConf.1.1	
		Config 3		TDDConf.2.1	
CSI-RS for tracking		Config 1,4		TRS.1.1 FDD	
		Config 2		TRS.1.1 TDD	
		Config 3		TRS.1.2 TDD	
OCNG Pattern Note 1				OP.1	As defined in A.3.2.1.
PDSCH parameters Note 4		Config 1,4		SR.1.1 FDD	As defined in A.3.1.1.
		Config 2		SR.1.1 TDD	
		Config 3		SR.2.1 TDD	
RMSI CORESET Reference Channel		Config 1,4		CR.1.1 FDD	
		Config 2		CR.1.1 TDD	
		Config 3		CR.2.1 TDD	
Dedicated CORESET Reference Channel		Config 1,4		CCR.1.1 FDD	
		Config 2		CCR.1.1 TDD	
		Config 3		CCR.2.1 TDD	
NR RF Channel Number				1	
EPRE ratio of PSS to SSS			dB	0	
EPRE ratio of PBCH_DMRS to SSS			dB		
EPRE ratio of PBCH to PBCH_DMRS			dB		
EPRE ratio of PDCCH_DMRS to SSS			dB		
EPRE ratio of PDCCH to PDCCH_DMRS			dB		
EPRE ratio of PDSCH_DMRS to SSS			dB		
EPRE ratio of PDSCH to PDSCH_DMRS			dB		
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	Power of SSB with index 0 is set to be above configured *rsrp-ThresholdSSB*
	N_{oc}	Config 1,4	dBm/15kHz	-98	
		Config 2		-98	
		Config 3		-101	
	$\hat{E}_s / N_{oc}$		dB	3	
	SS-RSRP Note 3		dBm/ SCS	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured *rsrp-ThresholdSSB*
	N_{oc}	Config 1,4	dBm/15kHz	-98	
		Config 2		-98	
		Config 3		-101	
	$\hat{E}_s / N_{oc}$		dB	-17	
	SS-RSRP Note 3		dBm/ SCS	-115	
Io Note 2		Config 1,4	dBm	-65.3/9.36MHz	For symbols without SSB index 1
		Config 2		-65.3/9.36MHz	
		Config 3		-65.38/18.36 MHz	
ss-PBCH-BlockPower			dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [2].
Configured UE transmitted power ($P_{\mathrm{CMAX},\ f,c}$)			dBm	23	As defined in clause 6.2.4 in TS 38.101-1.
PRACH Configuration				FR1 PRACH configuration 1	As defined in A.3.8.

Propagation Condition	-	AWGN	
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.			
Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.			
Note 3: Void			
Note 4: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.			

A.16.3.2.2.2.2 Test Requirements

Contention based random access is triggered by *not* explicitly assigning a random access preamble via dedicated signalling in the downlink.

A.16.3.2.2.2.2.1 Random Access Preamble Transmission

To test the UE behavior specified in Clause 6.2.2.2.1.1 the System Simulator shall receive the Random Access Preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SS-RSRP above the configured *rsrp-ThresholdSSB.*

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.16.3.2.2.2.2.2 Random Access Response Reception

To test the UE behavior specified in Clause 6.2.2.2.1.2 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a Random Access Response *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for Random Access Response(s) and shall transmit the msg3 if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.16.3.2.2.2.2.3 No Random Access Response Reception

To test the UE behavior specified in clause 6.2.2.2.1.3 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.16.3.2.2.2.2.4 Receiving an UL grant for msg3 retransmission

To test the UE behavior specified in clause 6.2.2.2.1.4 the System Simulator shall provide an UL grant for msg3 retransmission following a successful Random Access Response.

The UE shall re-transmit the msg3 upon the reception of an UL grant for msg3 retransmission.

A.16.3.2.2.2.2.5 Reception of an Incorrect Message over Temporary C-RNTI

To test the UE behavior specified in Clause 6.2.2.2.1.5 the System Simulator shall send a message addressed to the temporary C-RNTI with a UE Contention Resolution Identity included in the MAC control element *not* matching the CCCH SDU transmitted in msg3 uplink message.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires unless the received message includes a UE Contention Resolution Identity MAC control element and the UE Contention Resolution Identity included in the MAC control element matches the CCCH SDU transmitted in the uplink message.

A.16.3.2.2.2.2.6 Reception of a Correct Message over Temporary C-RNTI

To test the UE behavior specified in Clause 6.2.2.2.1.5 the System Simulator shall send a message addressed to the temporary C-RNTI with a UE Contention Resolution Identity included in the MAC control element matching the CCCH SDU transmitted in the msg3 uplink message.

The UE shall send ACK if the Contention Resolution is successful.

A.16.3.2.2.2.2.7 Contention Resolution Timer expiry

To test the UE behavior specified in Clause 6.2.2.2.1.6 the System Simulator shall *not* send a response to a msg3.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if the Contention Resolution Timer expires.

A.16.3.2.2.3 4-step RA type non-contention based random access test in FR1 for NR standalone for 1 Rx UE

A.16.3.2.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in Clause 6.2.2.2B and Clause 7.1A.2 in an AWGN model.

For this test one cell is used and configured as Pcell in FR1. Supported test parameters are shown in Table A.16.3.2.2.3.1-1. UE capable of SA with PCell in FR1 needs to be tested by using the parameters in Table A.16.3.2.2.3.1-2 for SSB-based non-contention based random access test (Test 1) and CSI-RS-based non-contention

based random access test (Test 2). Test 2 is only applicable to UE which supports csi-RSRP-AndRSRQ-MeasWithSSB or csi-RSRP-AndRSRQ-MeasWithoutSSB.

Table A.16.3.2.2.3.1-1: Supported test configurations for non-contention based random access test in FR1 for NR standalone

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations depending on UE capability	

Table A.16.3.2.2.3.1-2: General test parameters for non-contention based random access test in FR1 for NR Standalone

Parameter		Unit	Test-1	Test-2	Comments
SSB Configuration	Config 1, 2,4		SSB pattern 1 in FR1	SSB pattern 1 in FR1	As defined in A.3.10B, except for number of SSBs per SS-burst and SS/PBCH block index as below
	Config 3		SSB pattern 1 for RedCap in FR1	SSB pattern 1 for RedCap in FR1	
Number of SSBs per SS-burst			2	2	Different from the definition in A.3.10B
SS/PBCH block index			0,1	0,1	Different from the definition in A.3.10B
CSI-RS Configuration	Config 1, 2, 4		N/A	CSI-RS.1.1 FDD	As defined in A.3.14
	Config 3			CSI-RS.2.1 TDD	
Duplex Mode for Cell 1	Config 1		FDD	FDD	
	Config 2, 3		TDD	TDD	
	Config 4		HD-FDD	HD-FDD	
TDD Configuration	Config 2		TDDConf.1.1	TDDConf.1.1	
	Config 3		TDDConf.2.1	TDDConf.2.1	
CSI-RS for tracking	Config 1,4		TRS.1.1 FDD	TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	TRS.1.2 TDD	
OCNG Pattern Note 1			OP.1	OP.1	As defined in A.3.2.1.
PDSCH parameters Note 4	Config 1,4		SR.1.1 FDD	SR.1.1 FDD	As defined in A.3.1B.1.
	Config 2		SR.1.1 TDD	SR.1.1 TDD	
	Config 3		CR.2.1 TDD	CR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 TDD	CR.1.1 TDD	
	Config 2		CR.1.1 TDD	CR.1.1 TDD	
	Config 3		CR.2.1 TDD	CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1, 4		CCR.1.1 TDD	CCR.1.1 TDD	
	Config 2		CCR.1.1 TDD	CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD	CCR.2.1 TDD	
NR RF Channel Number			1	1	
EPRE ratio of PSS to SSS		dB	0	0	
EPRE ratio of PBCH_DMRS to SSS		dB			
EPRE ratio of PBCH to PBCH_DMRS		dB			
EPRE ratio of PDCCH_DMRS to SSS		dB			
EPRE ratio of PDCCH to PDCCH_DMRS		dB			

EPRE ratio of PDSCH_DMRS to SSS			dB			
EPRE ratio of PDSCH to PDSCH_DMRS			dB			
SSB with index 0	$\hat{E}_s/I_{ot}$		dB	3	3	Power of SSB with index 0 is set to be above configured *rsrp-ThresholdSSB*+[1]
	N_{oc}	Config 1	dBm/15kHz	-98	-98	
		Config 2		-98	-98	
		Config 3		-101	-101	
	$\hat{E}_s/N_{oc}$		dB	3	3	
	SS-RSRP Note 3		dBm/ SCS	-95	-95	
SSB with index 1	$\hat{E}_s/I_{ot}$		dB	-17	-17	Power of SSB with index 1 is set to be below configured *rsrp-ThresholdSSB*+[1]
	N_{oc}	Config 1	dBm/15kHz	-98	-98	
		Config 2		-98	-98	
		Config 3		-101	-101	
	$\hat{E}_s/N_{oc}$		dB	-17	-17	
	SS-RSRP Note 3		dBm/ SCS	-115	-115	
Io Note 2		Config 1	dBm	-65.3/9.36MHz	-65.3/9.36MHz	For symbols without SSB index 1
		Config 2		-65.3/9.36MHz	-65.3/9.36MHz	
		Config 3		-65.38/18.36 MHz	-65.38/18.36 MHz	
ss-PBCH-BlockPower			dBm/ SCS	-5	-5	As defined in clause 6.3.2 in TS 38.331 [2].
Configured UE transmitted power ($P_{CMAX,\ f,c}$)			dBm	23	23	As defined in clause 6.2.4 in TS 38.101-1.
PRACH Configuration				FR1 PRACH configuration 2	FR1 PRACH configuration 3	As defined in A.3.8B.2.
Propagation Condition			-	AWGN	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.
Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.
Note 3: Void
Note 4: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.

A.16.3.2.2.3.2 Test Requirements

Non-Contention based random access is triggered by explicitly assigning a random access preamble via dedicated signalling in the downlink. In the test, the non-contention based random access procedure is not initialized for Other SI requested from UE or beam failure recovery.

A.16.3.2.2.3.2.1 SSB-based Random Access Preamble Transmission

In Test-1, to test the UE behavior specified in Clause 6.2.2.2.2.1 for SSB-based Random Access Preamble tranmsision, with the contention-free Random Access Resources and the contention-free PRACH occasions

associated with SSBs configured, the System Simulator shall receive the Random Access Preamble which has the Preamble Index associated with the SSB with index 0.

In addition, the System Simulator shall receive the Random Access Preamble on the PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0, and the selected PRACH occasion shall belongs to the PRACH occassions permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.16.3.2.2.3.2.2 CSI-RS-based Random Access Preamble Transmission

In Test-2, to test the UE behavior specified in Clause 6.2.2.2.2.1 for CSI-RS-based Random Access Preamble tranmsision, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with CSI-RSs configured, the System Simulator shall receive the Random Access Preamble which has the Preamble Index associated with the CSI-RS configured.

In addition, the System Simulator shall receive the Random Access Preamble on the PRACH occasion which belongs to the PRACH occasions corresponding to the CSI-RS configured, and the selected PRACH occasion shall belongs to the PRACH occassions permitted by the restrictions given by the *ra-OccasionList*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.16.3.2.2.3.2.3 Random Access Response Reception

To test the UE behavior specified in Clause 6.2.2.2.2.2 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a Random Access Response *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for Random Access Response(s) if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.16.3.2.2.3.2.4 No Random Access Response Reception

To test the UE behavior specified in clause 6.2.2.2.2.3 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access

Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window configured in *RACH-ConfigCommon*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.16.3.2.2.4 4-step RA type non-contention based random access test in FR1 for NR standalone for 2 Rx UE

A.16.3.2.2.4.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in Clause 6.2.2.2B and Clause 7.1A.2 in an AWGN model.

For this test one cell is used and configured as PCell in FR1. Supported test parameters are shown in Table A.16.3.2.2.4.1-1. UE capable of SA with PCell in FR1 needs to be tested by using the parameters in Table A.16.3.2.2.4.1-2 for SSB-based non-contention based random access test (Test 1) and CSI-RS-based non-contention based random access test (Test 2). Test 2 is only applicable to UE which supports csi-RSRP-AndRSRQ-MeasWithSSB or csi-RSRP-AndRSRQ-MeasWithoutSSB.

Table A.16.3.2.2.4.1-1: Supported test configurations for non-contention based random access test in FR1 for NR standalone

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations depending on UE capability	

Table A.16.3.2.2.4.1-2: General test parameters for non-contention based random access test in FR1 for NR Standalone

Parameter		Unit	Test-1	Test-2	Comments
SSB Configuration	Config 1, 2,4		SSB pattern 1 in FR1	SSB pattern 1 in FR1	As defined in A.3.10B, except for number of SSBs per SS-burst and SS/PBCH block index as below
	Config 3		SSB pattern 1 for RedCap in FR1	SSB pattern 1 for RedCap in FR1	
Number of SSBs per SS-burst			2	2	Different from the definition in A.3.10B
SS/PBCH block index			0,1	0,1	Different from the definition in A.3.10B
CSI-RS Configuration	Config 1, 2, 4		N/A	CSI-RS.1.1 FDD	As defined in A.3.14
	Config 3			CSI-RS.2.1 TDD	

Duplex Mode for Cell 1	Config 1		FDD	FDD	
	Config 2, 3		TDD	TDD	
	Config 4		HD-FDD	HD-FDD	
TDD Configuration	Config 2		TDDConf.1.1	TDDConf.1.1	
	Config 3		TDDConf.2.1	TDDConf.2.1	
CSI-RS for tracking	Config 1,4		TRS.1.1 FDD	TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	TRS.1.2 TDD	
OCNG Pattern Note 1			OP.1	OP.1	As defined in A.3.2.1.
PDSCH parameters Note 4	Config 1,4		SR.1.1 FDD	SR.1.1 FDD	As defined in A.3.1B.1.
	Config 2		SR.1.1 TDD	SR.1.1 TDD	
	Config 3		CR.2.1 TDD	CR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 TDD	CR.1.1 TDD	
	Config 2		CR.1.1 TDD	CR.1.1 TDD	
	Config 3		CR.2.1 TDD	CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1, 4		CCR.1.1 TDD	CCR.1.1 TDD	
	Config 2		CCR.1.1 TDD	CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD	CCR.2.1 TDD	
NR RF Channel Number			1	1	
EPRE ratio of PSS to SSS		dB	0	0	
EPRE ratio of PBCH_DMRS to SSS		dB			
EPRE ratio of PBCH to PBCH_DMRS		dB			
EPRE ratio of PDCCH_DMRS to SSS		dB			
EPRE ratio of PDCCH to PDCCH_DMRS		dB			
EPRE ratio of PDSCH_DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH_DMRS		dB			
SSB with index 0	$\hat{E}_s / I_{ot}$	dB	3	3	Power of SSB with index 0 is set to be above configured *rsrp-ThresholdSSB*
	N_{oc} Config 1.4	dBm/15kHz	-98	-98	
	N_{oc} Config 2		-98	-98	
	N_{oc} Config 3		-101	-101	
	$\hat{E}_s / N_{oc}$	dB	3	3	
	SS-RSRP Note 3	dBm/ SCS	-95	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$	dB	-17	-17	Power of SSB with index 1 is set to be below configured *rsrp-ThresholdSSB*
	N_{oc} Config 1.4	dBm/15kHz	-98	-98	
	N_{oc} Config 2		-98	-98	
	Config 3		-101	-101	
	$\hat{E}_s / N_{oc}$	dB	-17	-17	
	SS-RSRP Note 3	dBm/ SCS	-115	-115	
Io Note 2	Config 1.4	dBm	-65.3/9.36MHz	-65.3/9.36MHz	For symbols without SSB index 1
	Config 2		-65.3/9.36MHz	-65.3/9.36MHz	
	Config 3		-65.38/18.36 MHz	-65.38/18.36 MHz	
ss-PBCH-BlockPower		dBm/ SCS	-5	-5	As defined in clause 6.3.2 in TS 38.331 [2].

Configured UE transmitted power ($P_{CMAX,\ f,c}$)	dBm	23	23	As defined in clause 6.2.4 in TS 38.101-1.
PRACH Configuration		FR1 PRACH configuration 2	FR1 PRACH configuration 3	As defined in A.3.8B.2.
Propagation Condition	-	AWGN	AWGN	
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel. Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters. Note 3: Void Note 4: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.				

A.16.3.2.2.4.2 Test Requirements

Non-Contention based random access is triggered by explicitly assigning a random access preamble via dedicated signalling in the downlink. In the test, the non-contention based random access procedure is not initialized for Other SI requested from UE or beam failure recovery.

A.16.3.2.2.4.2.1 SSB-based Random Access Preamble Transmission

In Test-1, to test the UE behavior specified in Clause 6.2.2.2.2.1 for SSB-based Random Access Preamble tranmsision, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs configured, the System Simulator shall receive the Random Access Preamble which has the Preamble Index associated with the SSB with index 0.

In addition, the System Simulator shall receive the Random Access Preamble on the PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0, and the selected PRACH occasion shall belongs to the PRACH occassions permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.16.3.2.2.4.2.2 CSI-RS-based Random Access Preamble Transmission

In Test-2, to test the UE behavior specified in Clause 6.2.2.2.2.1 for CSI-RS-based Random Access Preamble tranmsision, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with CSI-RSs configured, the System Simulator shall receive the Random Access Preamble which has the Preamble Index associated with the CSI-RS configured.

In addition, the System Simulator shall receive the Random Access Preamble on the PRACH occasion which belongs to the PRACH occasions corresponding to the CSI-RS configured, and the selected PRACH occasion shall belongs to the PRACH occassions permitted by the restrictions given by the *ra-OccasionList*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.16.3.2.2.4.2.3 Random Access Response Reception

To test the UE behavior specified in Clause 6.2.2.2.2.2 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a Random Access Response *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for Random Access Response(s) if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.16.3.2.2.4.2.4 No Random Access Response Reception

To test the UE behavior specified in clause 6.2.2.2.2.3 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window configured in *RACH-ConfigCommon*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.16.3.2.2.5 2-step RA type contention based random access test in FR1 for NR standalone for 1 Rx UE

A.16.3.2.2.5.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the 2-step RA type random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in Clause 6.2.2B.2 and Clause 7.1A.2 in an AWGN model.

For this test one cell is used and configured as PCell in FR1. Supported test parameters are shown in Table A.16.3.2.2.5.1-1. UE capable of SA with PCell in FR1 needs to be tested by using the parameters in Table A.16.3.2.2.5.1-2.

Table A.16.3.2.2.5.1-1: Supported test configurations for 2-step RA type contention based random access with successRAR test in FR1 for NR standalone

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations depending on UE capability	

Table A.16.3.2.2.5.1-2: General test parameters for 2-step RA type contention based random access with successRAR test in FR1 for NR standalone

Parameter			Unit	Test-1	Comments
SSB Configuration		Config 1,2,4		SSB pattern 1 in FR1	As defined in A.3.10, except for number of SSBs per SS-burst and SS/PBCH block index as below
		Config 3		SSB.1 RedCap FR1	
Number of SSBs per SS-burst				2	Different from the definition in A.3.10
SS/PBCH block index				0,1	Different from the definition in A.3.10
Duplex Mode for Cell 2		Config 1		FDD	
		Config 2,3		TDD	
		Config 4		HD-FDD	
TDD Configuration		Config 2		TDDConf.1.1	
		Config 3		TDDConf.2.1	
OCNG Pattern Note 1				OCNG pattern 1	As defined in A.3.2.1.
PDSCH parameters Note 3		Config 1,4		SR.1.1 FDD	As defined in A.3.1.1.
		Config 2		SR.1.1 TDD	
		Config 3		SR.2.1 TDD	
NR RF Channel Number				1	
EPRE ratio of PSS to SSS			dB	0	
EPRE ratio of PBCH_DMRS to SSS			dB		
EPRE ratio of PBCH to PBCH_DMRS			dB		
EPRE ratio of PDCCH_DMRS to SSS			dB		
EPRE ratio of PDCCH to PDCCH_DMRS			dB		
EPRE ratio of PDSCH_DMRS to SSS			dB		
EPRE ratio of PDSCH to PDSCH_DMRS			dB		
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	Power of SSB with index 0 is set to be above configured *msgA-RSRP-ThresholdSSB*
	N_{oc}	Config 1,2,4	dBm/15kHz	-98	
		Config 3		-101	
	$\hat{E}_s / N_{oc}$		dB	3	
	SS-RSRP		dBm/ SCS	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured *msgA-RSRP-ThresholdSSB*
	N_{oc}	Config 1,2,4	dBm/15kHz	-98	
		Config 3		-101	
	$\hat{E}_s / N_{oc}$		dB	-17	
	SS-RSRP		dBm/ SCS	-115	

Io Note 2	Config 1,2,4	dBm	-65.3/9.36MHz	For symbols without SSB index 1
	Config 3		-65.38/18.36 MHz	
ss-PBCH-BlockPower		dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [2].
Configured UE transmitted power ($P_{CMAX,\ f,c}$)		dBm	23	As defined in clause 6.2.4 in TS 38.101-1.
MsgA Configuration			FR1 MsgA configuration 1	As defined in A.3.20.2.1.
msgA-RSRP-ThresholdSSB		dBm	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [2].
Propagation Condition		-	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.
Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.
Note 3: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.

A.16.3.2.2.5.2 Test Requirements

Contention based random access is triggered by *not* explicitly assigning a random access preamble via dedicated signalling in the downlink.

A.16.3.2.2.5.2.1 MsgA Transmission

To test the UE behavior specified in Clause 6.2.2.3.1.1 the System Simulator shall receive the MsgA with a preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SS-RSRP above the configured *msgA-RSRP-ThresholdSSB.*

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first MsgA preamble transmission shall be -30 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.16.3.2.2.5.2.2 MsgB Reception

To test the UE behavior specified in Clause 6.2.2.3.1.2 the System Simulator shall transmit a MsgB containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a MsgB *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for MsgB(s) and shall transmit an ACK if the MsgB with a successRAR contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble and if the Contention Resolution is successful.

The UE may stop monitoring for MsgB(s) and shall transmit the msg3 if the MsgB with a fallbackRAR contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires if all received MsgB(s) contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first preamble shall be -30 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.16.3.2.2.5.2.3 No MsgB Reception

To test the UE behavior specified in clause 6.2.2.3.1.3 the System Simulator shall transmit a MsgB containing a successRAR message and a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires if no MsgB is received within the MsgB Response window.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first preamble shall be -30 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.16.3.2.2.6 2-step RA type contention based random access test in FR1 for NR standalone for 2 Rx UE

A.16.3.2.2.6.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the 2-step RA type random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in Clause 6.2.2B.2 and Clause 7.1A.2 in an AWGN model.

For this test one cell is used and configured as PCell in FR1. Supported test parameters are shown in Table A.16.3.2.2.6.1-1. UE capable of SA with PCell in FR1 needs to be tested by using the parameters in Table A.16.3.2.2.6.1-2.

Table A.16.3.2.2.6.1-1: Supported test configurations for 2-step RA type contention based random access with successRAR test in FR1 for NR standalone

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations depending on UE capability	

Table A.16.3.2.2.6.1-2: General test parameters for 2-step RA type contention based random access with successRAR test in FR1 for NR standalone

Parameter		Unit	Test-1	Comments
SSB Configuration	Config 1,2,4		SSB.1 FR1	As defined in A.3.10, except for number of SSBs per SS-burst and
	Config 3		SSB.1 RedCap FR1	

				SS/PBCH block index as below
Number of SSBs per SS-burst			2	Different from the definition in A.3.10
SS/PBCH block index			0,1	Different from the definition in A.3.10
Duplex Mode for Cell 2	Config 1		FDD	
	Config 2,3		TDD	
	Config 4		HD-FDD	
TDD Configuration	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
OCNG Pattern Note 1			OCNG pattern 1	As defined in A.3.2.1.
PDSCH parameters Note 3	Config 1,4		SR.1.1 FDD	As defined in A.3.1.1.
	Config 2		SR.1.1 TDD	
	Config 3		SR.2.1 TDD	
NR RF Channel Number			1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH_DMRS to SSS		dB		
EPRE ratio of PBCH to PBCH_DMRS		dB		
EPRE ratio of PDCCH_DMRS to SSS		dB		
EPRE ratio of PDCCH to PDCCH_DMRS		dB		
EPRE ratio of PDSCH_DMRS to SSS		dB		
EPRE ratio of PDSCH to PDSCH_DMRS		dB		
SSB with index 0	$\hat{E}_s / I_{ot}$	dB	3	Power of SSB with index 0 is set to be above configured *msgA-RSRP-ThresholdSSB*
	N_{oc} Config 1,2,4	dBm/15kHz	-98	
	N_{oc} Config 3		-101	
	$\hat{E}_s / N_{oc}$	dB	3	
	SS-RSRP	dBm/ SCS	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$	dB	-17	Power of SSB with index 1 is set to be below configured *msgA-RSRP-ThresholdSSB*
	N_{oc} Config 1,2,4	dBm/15kHz	-98	
	N_{oc} Config 3		-101	
	$\hat{E}_s / N_{oc}$	dB	-17	
	SS-RSRP	dBm/ SCS	-115	
Io Note 2	Config 1,2,4	dBm	-65.3/9.36MHz	For symbols without SSB index 1
	Config 3		-65.38/18.36 MHz	
ss-PBCH-BlockPower		dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [2].
Configured UE transmitted power ($P_{CMAX,\ f,c}$)		dBm	23	As defined in clause 6.2.4 in TS 38.101-1.
MsgA Configuration			FR1 MsgA configuration 1	As defined in A.3.20.2.1.
msgA-RSRP-ThresholdSSB		dBm	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [2].
Propagation Condition		-	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.

Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.

Note 3: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.

A.16.3.2.2.6.2 Test Requirements

Contention based random access is triggered by *not* explicitly assigning a random access preamble via dedicated signalling in the downlink.

A.16.3.2.2.6.2.1 MsgA Transmission

To test the UE behavior specified in Clause 6.2.2.3.1.1 the System Simulator shall receive the MsgA with a preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SS-RSRP above the configured *msgA-RSRP-ThresholdSSB.*

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first MsgA preamble transmission shall be -30 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.16.3.2.2.6.2.2 MsgB Reception

To test the UE behavior specified in Clause 6.2.2.3.1.2 the System Simulator shall transmit a MsgB containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a MsgB *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for MsgB(s) and shall transmit an ACK if the MsgB with a successRAR contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble and if the Contention Resolution is successful.

The UE may stop monitoring for MsgB(s) and shall transmit the msg3 if the MsgB with a fallbackRAR contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires if all received MsgB(s) contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first preamble shall be -30 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.16.3.2.2.6.2.3 No MsgB Reception

To test the UE behavior specified in clause 6.2.2.3.1.3 the System Simulator shall transmit a MsgB containing a successRAR message and a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires if no MsgB is received within the MsgB Response window.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first preamble shall be -30 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.16.3.2.2.7 2-step RA type non-contention based test in FR1 for NR standalone for 1 RX UE

A.16.3.2.2.7.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in Clause 6.2.2B.2 and Clause 7.1A.2 in an AWGN model.

For this test one cell is used and configured as PCell in FR1. Supported test parameters are shown in Table A.16.3.2.2.7.1-1. UE capable of SA with PCell in FR1 needs to be tested by using the parameters in Table A.16.3.2.2.7.1-2.

Table A.16.3.2.2.7.1-1: Supported test configurations for non-contention based random access test in FR1 for NR standalone

Config	Description
1	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations depending on UE capability	

Table A.16.3.2.2.7.1-2: General test parameters for non-contention based random access test in FR1 for NR Standalone

Parameter		Unit	Test-1	Comments
SSB Configuration	Config 1		SSB.1 RedCap FR1	As defined in A.3.10, except for number of SSBs per SS-burst and SS/PBCH block index as below
	Config 2		SSB.1 FR1	
Number of SSBs per SS-burst			2	Different from the definition in A.3.10
SS/PBCH block index			0,1	Different from the definition in A.3.10
Duplex Mode for Cell 1	Config 1		TDD	
	Config 2		HD-FDD	
TDD Configuration	Config 1		TDDConf.2.1	
OCNG Pattern Note 1			OCNG pattern 1	As defined in A.3.2.1.
PDSCH parameters Note 4	Config 1		SR.2.1 TDD	As defined in A.3.1.1.
	Config 2		SR.1.1 FDD	
NR RF Channel Number			1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH_DMRS to SSS		dB		
EPRE ratio of PBCH to PBCH_DMRS		dB		
EPRE ratio of PDCCH_DMRS to SSS		dB		

EPRE ratio of PDCCH to PDCCH_DMRS			dB		
EPRE ratio of PDSCH_DMRS to SSS			dB		
EPRE ratio of PDSCH to PDSCH_DMRS			dB		
msgA-*RSRP-ThresholdSSB*				RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [2].
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	Power of SSB with index 0 is set to be above configured msgA-*RSRP-ThresholdSSB*
	N_{oc}	Config 1	dBm/15kHz	-101	
		Config 2		-98	
	$\hat{E}_s / N_{oc}$		dB	3	
	SS-RSRP Note 3		dBm/ SCS	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured msgA-*RSRP-ThresholdSSB*
	N_{oc}	Config 1	dBm/15kHz	-101	
		Config 2		-98	
	$\hat{E}_s / N_{oc}$		dB	-17	
	SS-RSRP Note 3		dBm/ SCS	-115	
Io Note 2		Config 1	dBm	-65.38/18.36 MHz	For symbols without SSB index 1
		Config 2		-65.3/9.36MHz	
ss-PBCH-BlockPower			dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [2].
Configured UE transmitted power ($P_{CMAX,\ f,\ c}$)			dBm	23	As defined in clause 6.2.4 in TS 38.101-1.
MsgA Configuration				FR1 MsgA configuration 2	As defined in A.3.20.2.2.
Propagation Condition			-	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.
Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.
Note 3: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.

A.16.3.2.2.7.2 Test Requirements

Non-Contention based random access is triggered by explicitly assigning a random access preamble via dedicated signalling in the downlink. In the test, the non-contention based random access procedure is not initialized for Other SI requested from UE or beam failure recovery.

A.16.3.2.2.7.2.1 MsgA Transmission

To test the UE behavior specified in Clause 6.2.2.3.2.1, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs configured, the System Simulator shall receive the MsgA with a preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0.

In addition, the System Simulator shall receive the MsgA PRACH on the PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0, and the selected PRACH occasion shall belongs to the PRACH occasions permitted by the restrictions given first by the *msgA-SSB-SharedRO-MaskIndex* if configured, or next by the *ra-ssb-OccasionMaskIndex* if configured.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first preamble shall be -30 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.16.3.2.2.7.2.2 MsgB Reception

To test the UE behavior specified in Clause 6.2.2.3.2.2 the System Simulator shall transmit a MsgB containing a fallbackRAR containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a MsgB *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for MsgB(s) and shall transmit the msg3 containing the payload of MsgA PUSCH if the MsgB with a fallbackRAR contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble. The UE shall monitor contention resolution as described in clause 8.2A in TS 38.213 [3].

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires if all received MsgB's contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first preamble shall be -30 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA and msg3 transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.16.3.2.2.7.2.3 No MsgB Reception

To test the UE behavior specified in clause 6.2.2.3.2.3 the System Simulator shall transmit a MsgB containing a successRAR message and a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA transmission power when the backoff time expires if no MsgB is received within the MsgB Response window.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first preamble shall be -30 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.16.3.2.2.8 2-step RA type non-contention based test in FR1 for NR standalone for 2 RX UE

A.16.3.2.2.8.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in Clause 6.2.2B.2 and Clause 7.1A.2 in an AWGN model.

For this test one cell is used and configured as PCell in FR1. Supported test parameters are shown in Table A.16.3.2.2.8.1-1. UE capable of SA with PCell in FR1 needs to be tested by using the parameters in Table A.16.3.2.2.8.1-2.

Table A.16.3.2.2.8.1-1: Supported test configurations for non-contention based random access test in FR1 for NR standalone

Config	Description
1	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations depending on UE capability	

Table A.16.3.2.2.8.1-2: General test parameters for non-contention based random access test in FR1 for NR Standalone

Parameter		Unit	Test-1	Comments
SSB Configuration	Config 1		SSB.1 RedCap FR1	As defined in A.3.10, except for number of SSBs per SS-burst and SS/PBCH block index as below
	Config 2		SSB.1 FR1	
Number of SSBs per SS-burst			2	Different from the definition in A.3.10
SS/PBCH block index			0,1	Different from the definition in A.3.10
Duplex Mode for Cell 1	Config 1		TDD	
	Config 2		HD-FDD	
TDD Configuration	Config 1		TDDConf.2.1	
OCNG Pattern Note 1			OCNG pattern 1	As defined in A.3.2.1.
PDSCH parameters Note 4	Config 1		SR.2.1 TDD	As defined in A.3.1.1.
	Config 2		SR.1.1 FDD	
NR RF Channel Number			1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH_DMRS to SSS		dB		
EPRE ratio of PBCH to PBCH_DMRS		dB		
EPRE ratio of PDCCH_DMRS to SSS		dB		
EPRE ratio of PDCCH to PDCCH_DMRS		dB		
EPRE ratio of PDSCH_DMRS to SSS		dB		
EPRE ratio of PDSCH to PDSCH_DMRS		dB		
msgA-*RSRP-ThresholdSSB*			RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [2].
SSB with index 0	$\hat{E}_s / I_{ot}$	dB	3	Power of SSB with index 0 is set to be

	N_{oc}	Config 1	dBm/15kHz	-101	above configured msgA-*RSRP-ThresholdSSB*
		Config 2		-98	
	$\hat{E}_s / N_{oc}$		dB	3	
	SS-RSRP Note 3		dBm/ SCS	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured msgA-*RSRP-ThresholdSSB*
	N_{oc}	Config 1	dBm/15kHz	-101	
		Config 2		-98	
	$\hat{E}_s / N_{oc}$		dB	-17	
	SS-RSRP Note 3		dBm/ SCS	-115	
Io Note 2		Config 1	dBm	-65.3/9.36MHz	For symbols without SSB index 1
		Config 2		-65.38/18.36 MHz	
ss-PBCH-BlockPower			dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [2].
Configured UE transmitted power ($P_{\text{CMAX, f, c}}$)			dBm	23	As defined in clause 6.2.4 in TS 38.101-1.
MsgA Configuration				FR1 MsgA configuration 2	As defined in A.3.20.2.2.
Propagation Condition			-	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.
Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.
Note 3: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.

A.16.3.2.2.8.2 Test Requirements

Non-Contention based random access is triggered by explicitly assigning a random access preamble via dedicated signalling in the downlink. In the test, the non-contention based random access procedure is not initialized for Other SI requested from UE or beam failure recovery.

A.16.3.2.2.8.2.1 MsgA Transmission

To test the UE behavior specified in Clause 6.2.2.3.2.1, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs configured, the System Simulator shall receive the MsgA with a preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0.

In addition, the System Simulator shall receive the MsgA PRACH on the PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0, and the selected PRACH occasion shall belongs to the PRACH occasions permitted by the restrictions given first by the *msgA-SSB-SharedRO-MaskIndex* if configured, or next by the *ra-ssb-OccasionMaskIndex* if configured.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first preamble shall be -30 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.16.3.2.2.8.2.2 MsgB Reception

To test the UE behavior specified in Clause 6.2.2.3.2.2 the System Simulator shall transmit a MsgB containing a fallbackRAR containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a MsgB *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for MsgB(s) and shall transmit the msg3 containing the payload of MsgA PUSCH if the MsgB with a fallbackRAR contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble. The UE shall monitor contention resolution as described in clause 8.2A in TS 38.213 [3].

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires if all received MsgB's contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first preamble shall be -30 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA and msg3 transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.16.3.2.2.8.2.3 No MsgB Reception

To test the UE behavior specified in clause 6.2.2.3.2.3 the System Simulator shall transmit a MsgB containing a successRAR message and a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA transmission power when the backoff time expires if no MsgB is received within the MsgB Response window.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first preamble shall be -30 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.16.3.2.3 SA: RRC Connection Release with Redirection

A.16.3.2.3.1 Redirection from NR in FR1 to NR in FR1 for 1 Rx UE

A.16.3.2.3.1.1 Test Purpose and Environment

This test is to verify RRC connection release with redirection from NR to NR requirements specified in clause 6.2.3A.2.1.

A.16.3.2.3.1.2 Test Parameters

Supported test configurations are shown in table A.16.3.2.3.1.2-1. The time delay is tested by using the parameters in table A.16.3.2.3.1.2-2, and A.16.3.2.3.1.2-3.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. The *RRCRelease* message shall be sent to the UE during period T1 and the start of T2 is the instant when the last TTI containing the RRC message is sent to the UE. Prior to time duration T2, the UE shall not have any timing information of Cell 2. Cell 2 is powered up at the beginning of the T2. Cell 1 and Cell 2 belong to different tracking areas.

Table A.16.3.2.3.1.2-1: Redirection from NR to NR test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.3.2.3.1.2-2: General test parameters for Redirection from NR to NR test case

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	2.3	

Table A.16.3.2.3.1.2-3: Cell specific test parameters for Redirection from NR to NR test case

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number			1		2	
Duplex mode	Config 1		FDD			
	Config 2, 3		TDD			
	Config 4		HD-FDD			
SSB Configuration	Config 1		SSB.1 FR1			
	Config 2		SSB.1 FR1			
	Config 3		SSB.1 RedCap FR1			
	Config 4		SSB.1 FR1			
CSI-RS for tracking	Config 1		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
	Config 4		TRS.1.1 FDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
	Config 4		Not Applicable			
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		20: $N_{RB,c}$ = 51			
	Config 4		10: $N_{RB,c}$ = 52			
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		20: $N_{RB,c}$ = 51			

	Config 4		10: $N_{RB,c}$ = 52			
DRX Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD			
	Config 2		SR.1.1 TDD			
	Config 3		SR2.1 TDD			
	Config 4		TBD			
CORESET Reference Channel	Config 1		TBD			
	Config 2		TBD			
	Config 3		TBD			
	Config 4		TBD			
OCNG Patterns			OCNG pattern 1			
SMTC configuration	Config 1, 2, 4		SMTC.1 FR1			
	Config 3		SMTC.2 FR1			
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4	kHz	15 kHz			
	Config 3		30 kHz			
PUCCH/PUSCH subcarrier spacing	Config 1,2,4	kHz	15 kHz			
	Config 3		30 kHz			
PRACH configuration			FR1 PRACH configuration 1			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1 RedCap			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1 RedCap			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-98			
N_{oc} Note2	Config 1, 2, 4	dBm/SCS	-98			
	Config 3		-95			
$\hat{E}_s / I_{ot}$		dB	4	4	-infinity	4
$\hat{E}_s / N_{oc}$		dB	4	4	-infinity	4
Io Note3	Config 1,2, 4	dBm/ 9.36MHz	-64.59	-64.59	-70.05	-64.59
	Config 3	dBm/ 18.36MHz	-61.66	-61.66	-67.12	-61.66
Propagation condition		-	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.16.3.2.3.1.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 2240 ms from the beginning of time period T2.
The rate of correct RRC connection release redirection to NR observed during repeated tests shall be at least 90%.

NOTE: The redirection delay can be expressed as:

$$T_{connection_release_redirect_NR} = T_{RRC_procedure_delay} + T_{identify\text{-}NR} + T_{SI\text{-}NR} + T_{RACH},$$

where:

$T_{RRC_procedure_delay}$ = 110 ms in the test.

$T_{identify\text{-}NR}$ = 680 ms in the test.

$T_{SI\text{-}NR}$ = 1280 ms, it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target NR cell.

T_{RACH} = 170 ms in the test.

This gives a total of 2240 ms.

A.16.3.2.3.2 Redirection from NR in FR1 to NR in FR1 for 2 Rx UE

A.16.3.2.3.2.1 Test Purpose and Environment

This test is to verify RRC connection release with redirection from NR to NR requirements specified in clause 6.2.3A.2.1.

A.16.3.2.3.2.2 Test Parameters

Supported test configurations are shown in table A.16.3.2.3.2.2-1. The time delay is tested by using the parameters in table A.16.3.2.3.2.2-2, and A.16.3.2.3.2.2-3.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. The *RRCRelease* message shall be sent to the UE during period T1 and the start of T2 is the instant when the last TTI containing the RRC message is sent to the UE. Prior to time duration T2, the UE shall not have any timing information of Cell 2. Cell 2 is powered up at the beginning of the T2. Cell 1 and Cell 2 belong to different tracking areas.

Table A.16.3.2.3.2.2-1: Redirection from NR to NR test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
	Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.3.2.3.2.2-2: General test parameters for Redirection from NR to NR test case

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
Filter coefficient			0	L3 filtering is not used

Access Barring Information	-	Not Sent	No additional delays in random access procedure.
Time offset between cells		3 μs	Synchronous cells
T1	s	5	
T2	s	2.3	

Table A.16.3.2.3.2.2-3: Cell specific test parameters for Redirection from NR to NR test case

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number			1		2	
Duplex mode	Config 1		FDD			
	Config 2, 3		TDD			
	Config 4		HD-FDD			
SSB Configuration	Config 1		SSB.1 FR1			
	Config 2		SSB.1 FR1			
	Config 3		SSB.1 RedCap FR1			
	Config 4		SSB.1 FR1			
CSI-RS for tracking	Config 1		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
	Config 4		TRS.1.1 FDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
	Config 4		Not Applicable			
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		20: $N_{RB,c}$ = 51			
	Config 4		10: $N_{RB,c}$ = 52			
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		20: $N_{RB,c}$ = 51			
	Config 4		10: $N_{RB,c}$ = 52			
DRX Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD			
	Config 2		SR.1.1 TDD			
	Config 3		SR2.1 TDD			
	Config 4		SR.1.1 FDD			
CORESET Reference Channel	Config 1		CR.1.1 FDD			
	Config 2		CR.1.1 TDD			
	Config 3		CR2.1 TDD			
	Config 4		CR.1.1 FDD			
OCNG Patterns			OCNG pattern 1			
SMTC configuration	Config 1, 2, 4		SMTC.1 FR1			
	Config 3		SMTC.2 FR1			
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4	kHz	15 kHz			
	Config 3		30 kHz			
PUCCH/PUSCH subcarrier spacing	Config 1,2,4	kHz	15 kHz			
	Config 3		30 kHz			
PRACH configuration			FR1 PRACH configuration 1			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1 RedCap			
	Initial UL BWP		ULBWP.0.1			

	Dedicated UL BWP		ULBWP.1.1 RedCap			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-98			
N_{oc} Note2	Config 1, 2, 4	dBm/SCS	-98			
	Config 3		-95			
$\hat{E}_s/I_{ot}$		dB	4	4	-infinity	4
$\hat{E}_s/N_{oc}$		dB	4	4	-infinity	4
Io Note3	Config 1,2, 4	dBm/ 9.36MHz	-64.59	-64.59	-70.05	-64.59
	Config 3	dBm/ 18.36MHz	-61.66	-61.66	-67.12	-61.66
Propagation condition		-	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.16.3.2.3.2.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 2240 ms from the beginning of time period T2.
The rate of correct RRC connection release redirection to NR observed during repeated tests shall be at least 90%.

NOTE: The redirection delay can be expressed as:

$$T_{connection_release_redirect_NR} = T_{RRC_procedure_delay} + T_{identify\text{-}NR} + T_{SI\text{-}NR} + T_{RACH},$$

where:

$T_{RRC_procedure_delay}$ = 110 ms in the test.

$T_{identify\text{-}NR}$ = 680 ms in the test.

$T_{SI\text{-}NR}$ = 1280 ms, it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target NR cell.

T_{RACH} = 170 ms in the test.

This gives a total of 2240 ms.

A.16.3.2.3.3 Redirection from NR in FR1 to E-UTRAN for 1 Rx UE

A.16.3.2.3.3.1 Test Purpose and Environment

This test is to verify RRC connection release with redirection from NR to E-UTRAN requirements specified in clause 6.2.3A.2.2.

A.16.3.2.3.3.2 Test Parameters

Supported test configurations are shown in table A.16.3.2.3.3.2-1. The time delay is tested by using the parameters in table A.16.3.2.3.3.2-2, A.16.3.2.3.3.2-3 and A.16.3.2.3.3.2-4.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. The *RRCRelease* message shall be sent to the UE during period T1 and the start of T2 is the instant when the last TTI containing the RRC message is sent to the UE. Prior to time duration T2, the UE shall not have any timing information of Cell 2. Cell 2 is powered up at the beginning of the T2.

Table A.16.3.2.3.3.2-1: Redirection from NR to E-UTRAN test configurations

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6	NR 30kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE TDD
7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE FDD
8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.3.2.3.3.2-2: General test parameters for Redirection from NR to E-UTRAN test case

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	2.3	

Table A.16.3.2.3.3.2-3: Cell specific test parameters for Redirection from NR to E-UTRAN (cell 1)

Parameter		Unit	Cell 1	
			T1	T2
RF Channel Number			1	
Duplex mode	Config 1,4		FDD	
	Config 2,3,5,6		TDD	
	Config 7, 8		HD-FDD	
SSB Configuration	Config 1,2,4,5,7,8		SSB.1 FR1	
	Config 3,6		SSB.1 RedCap FR1	
CSI-RS for tracking	Config 1, 4		TRS.1.1 FDD	
	Config 2, 5		TRS.1.1 TDD	
	Config 3, 6		TRS.1.2 TDD	
	Config 7,8		TRS.1.1 FDD	
TDD configuration	Config 1,4, 7, 8		Not Applicable	

	Config 2,5		TDDConf.1.1	
	Config 3,6		TDDConf.2.1	
$BW_{channel}$	Config 1,4	MHz	10: $N_{RB,c}$ = 52	
	Config 2,5		10: $N_{RB,c}$ = 52	
	Config 3,6		20: $N_{RB,c}$ = 51	
	Config 7,8		10: $N_{RB,c}$ = 52	
BWP BW	Config 1,4	MHz	10: $N_{RB,c}$ = 52	
	Config 2,5		10: $N_{RB,c}$ = 52	
	Config 3,6		20: $N_{RB,c}$ = 51	
	Config 7,8		10: $N_{RB,c}$ = 52	
DRX Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	
	Config 2,5		SR.1.1 TDD	
	Config 3,6		SR2.1 TDD	
	Config 7,8		SR.1.1 FDD	
CORESET Reference Channel	Config 1,4		CR.1.1 FDD	
	Config 2,5		CR.1.1 TDD	
	Config 3,6		CR2.1 TDD	
	Config 7,8		CR.1.1 FDD	
OCNG Patterns			OCNG pattern 1	
SMTC configuration	Config 1,2,4,5,7,8		SMTC.1 FR1	
	Config 3,6		SMTC.2 FR1	
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5,7,8	kHz	15 kHz	
	Config 3,6		30 kHz	
PUCCH/PUSCH subcarrier spacing	Config 1,2,4,5,7,8	kHz	15 kHz	
	Config 3,6		30 kHz	
PRACH configuration			FR1 PRACH configuration 1	
BWP configuration	Initial DL BWP		DLBWP.0.1	
	Dedicated DL BWP		DLBWP.1.1 RedCap	
	Initial UL BWP		ULBWP.0.1	
	Dedicated UL BWP		ULBWP.1.1 RedCap	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2		dBm/15kHz	-98	
N_{oc} Note2	Config 1,2,4,5,7,8	dBm/SCS	-98	
	Config 3,6		-95	
$\hat{E}_s / I_{ot}$		dB	4	4
$\hat{E}_s / N_{oc}$		dB	4	4
Io Note3	Config 1,2,4,5,7,8	dBm/ 9.36MHz	-64.59	-64.59
	Config 3,6	dBm/ 18.36MHz	-61.66	-61.66

Propagation condition	-	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.16.3.2.3.3.2-4: Cell specific test parameters for Redirection from NR to E-UTRAN (cell 2)

Parameter	Unit	Configuration	Cell 2	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6, 7, 8	2	
Duplex mode		1, 2, 3, 7	FDD	
		4, 5, 6, 8	TDD	
TDD special subframe configuration[Note1]		4, 5, 6, 8	6	
TDD uplink-downlink configuration[Note1]		4, 5, 6, 8	1	
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6, 7, 8	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PRACH Configuration[Note2]		1, 2, 3, 7	4	
		4, 5, 6, 8	53	
PDSCH parameters: DL Reference Measurement Channel[Note3]		1, 2, 3, 7	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6, 8	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note3]		1, 2, 3, 7	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6, 8	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note3]		1, 2, 3, 7	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6, 8	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
PBCH_RA	dB	1, 2, 3, 4, 5, 6, 7, 8	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note4]				
OCNG_RB[Note4]				
N_{oc}[Note5]	dBm/15kHz	1,2,3,4,5,6,7,8	-98	

$\hat{E}_s/N_{oc}$	dB	1,2,3,4,5,6,7,8	-Infinity	4
$\hat{E}_s/I_{ot}$ Note6	dB	1,2,3,4,5,6,7,8	-Infinity	4
RSRP Note6	dBm/15kHz	1,2,3,4,5,6,7,8	-Infinity	-94
SCH_RP Note6	dBm/15kHz	1,2,3,4,5,6,7,8	-Infinity	-94
Io Note6	dBm/9MHz	1,2,3,4,5,6,7,8	-70.22	-64.76
Propagation Condition		1,2,3,4,5,6,7,8	AWGN	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [23].
Note 3: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 4: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 6: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 7: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].

A.16.3.2.3.3.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 2205 ms from the beginning of time period T2.
The rate of correct RRC connection release redirection to E-UTRAN observed during repeated tests shall be at least 90%.

NOTE: The redirection delay can be expressed as:

$$T_{connection_release_redirect_E\text{-}UTRA} = T_{RRC_procedure_delay} + T_{identify\text{-}E\text{-}UTRA} + T_{SI\text{-}E\text{-}UTRA} + T_{RACH},$$

where:

$T_{RRC_procedure_delay}$ = 110 ms in the test.

$T_{identify\text{-}E\text{-}UTRA}$ = 800 ms in the test.

$T_{SI\text{-}E\text{-}UTRA}$ = 1280 ms, it is the time required for receiving all the relevant system information as defined in TS 36.331 for the target E-UTRA cell.

T_{RACH} = 15 ms in the test.

This gives a total of 2205 ms.

A.16.3.2.3.4 Redirection from NR in FR1 to E-UTRAN for 2 Rx UE

A.16.3.2.3.4.1 Test Purpose and Environment

This test is to verify RRC connection release with redirection from NR to E-UTRAN requirements specified in clause 6.2.3A.2.2.

A.16.3.2.3.4.2 Test Parameters

Supported test configurations are shown in table A.16.3.2.3.4.2-1. The time delay is tested by using the parameters in table A.16.3.2.3.4.2-2, A.16.3.2.3.4.2-3 and A.16.3.2.3.4.2-4.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. The *RRCRelease* message shall be sent to the UE during period T1 and the start of T2 is the instant when the last TTI containing the RRC message is sent to the UE. Prior to time duration T2, the UE shall not have any timing information of Cell 2. Cell 2 is powered up at the beginning of the T2.

Table A.16.3.2.3.4.2-1: Redirection from NR to E-UTRAN test configurations

Configuration	Description

1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6	NR 30kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE TDD
7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE FDD
8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.3.2.3.4.2-2: General test parameters for Redirection from NR to E-UTRAN test case

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 µs	Synchronous cells
T1		s	5	
T2		s	2.3	

Table A.16.3.2.3.4.2-3: Cell specific test parameters for Redirection from NR to E-UTRAN (cell 1)

Parameter		Unit	Cell 1	
			T1	T2
RF Channel Number			1	
Duplex mode	Config 1,4		FDD	
	Config 2,3,5,6		TDD	
	Config 7, 8		HD-FDD	
SSB Configuration	Config 1,2,4,5,7,8		SSB.1 FR1	
	Config 3,6		SSB.1 RedCap FR1	
CSI-RS for tracking	Config 1, 4		TRS.1.1 FDD	
	Config 2, 5		TRS.1.1 TDD	
	Config 3, 6		TRS.1.2 TDD	
	Config 7,8		TRS.1.1 FDD	
TDD configuration	Config 1,4, 7, 8		Not Applicable	
	Config 2,5		TDDConf.1.1	
	Config 3,6		TDDConf.2.1	
$BW_{channel}$	Config 1,4	MHz	10: $N_{RB,c}$ = 52	
	Config 2,5		10: $N_{RB,c}$ = 52	
	Config 3,6		20: $N_{RB,c}$ = 51	
	Config 7,8		10: $N_{RB,c}$ = 52	
BWP BW	Config 1,4	MHz	10: $N_{RB,c}$ = 52	
	Config 2,5		10: $N_{RB,c}$ = 52	
	Config 3,6		20: $N_{RB,c}$ = 51	
	Config 7,8		10: $N_{RB,c}$ = 52	
DRX Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	
	Config 2,5		SR.1.1 TDD	
	Config 3,6		SR.2.1 TDD	
	Config 7,8		SR.1.1 FDD	
CORESET Reference Channel	Config 1,4		CR.1.1 FDD	
	Config 2,5		CR.1.1 TDD	
	Config 3,6		CR.2.1 TDD	

	Config 7,8		CR.1.1 FDD	
OCNG Patterns			OCNG pattern 1	
SMTC configuration	Config 1,2,4,5,7,8		SMTC.1 FR1	
	Config 3,6		SMTC.2 FR1	
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5,7,8	kHz	15 kHz	
	Config 3,6		30 kHz	
PUCCH/PUSCH subcarrier spacing	Config 1,2,4,5,7,8	kHz	15 kHz	
	Config 3,6		30 kHz	
PRACH configuration			FR1 PRACH configuration 1	
BWP configuration	Initial DL BWP		DLBWP.0.1	
	Dedicated DL BWP		DLBWP.1.1 RedCap	
	Initial UL BWP		ULBWP.0.1	
	Dedicated UL BWP		ULBWP.1.1 RedCap	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2		dBm/15kHz	-98	
N_{oc} Note2	Config 1,2,4,5,7,8	dBm/SCS	-98	
	Config 3,6		-95	
$\hat{E}_s/I_{ot}$		dB	4	4
$\hat{E}_s/N_{oc}$		dB	4	4
Io Note3	Config 1,2,4,5,7,8	dBm/9.36MHz	-64.59	-64.59
	Config 3,6	dBm/18.36MHz	-61.66	-61.66
Propagation condition		-	AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.16.3.2.3.4.2-4: Cell specific test parameters for Redirection from NR to E-UTRAN (cell 2)

Parameter	Unit	Configuration	Cell 2	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6, 7, 8	2	
Duplex mode		1, 2, 3, 7	FDD	
		4, 5, 6, 8	TDD	
TDD special subframe configuration Note1		4, 5, 6, 8	6	

TDD uplink-downlink configuration[Note1]		4, 5, 6, 8	1	
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6, 7, 8	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PRACH Configuration[Note2]		1, 2, 3, 7	4	
		4, 5, 6, 8	53	
PDSCH parameters: DL Reference Measurement Channel[Note3]		1, 2, 3, 7	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6, 8	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note3]		1, 2, 3, 7	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6, 8	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note3]		1, 2, 3, 7	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6, 8	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
PBCH_RA	dB	1, 2, 3, 4, 5, 6, 7, 8	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note4]				
OCNG_RB[Note4]				
N_{oc}[Note5]	dBm/15kHz	1,2,3,4,5,6,7,8	-98	
$\hat{E}_s/N_{oc}$	dB	1,2,3,4,5,6,7,8	-Infinity	4
$\hat{E}_s/I_{ot}$[Note6]	dB	1,2,3,4,5,6,7,8	-Infinity	4
RSRP[Note6]	dBm/15kHz	1,2,3,4,5,6,7,8	-Infinity	-94
SCH_RP[Note6]	dBm/15kHz	1,2,3,4,5,6,7,8	-Infinity	-94
Io[Note6]	dBm/9MHz	1,2,3,4,5,6,7,8	-70.22	-64.76
Propagation Condition		1,2,3,4,5,6,7,8	AWGN	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [23].
Note 3: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 4: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 6: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 7: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].

A.16.3.2.3.4.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 2205 ms from the beginning of time period T2.
The rate of correct RRC connection release redirection to E-UTRAN observed during repeated tests shall be at least 90%.

NOTE: The redirection delay can be expressed as:

$$T_{connection_release_redirect_E\text{-}UTRA} = T_{RRC_procedure_delay} + T_{identify\text{-}E\text{-}UTRA} + T_{SI\text{-}E\text{-}UTRA} + T_{RACH},$$

where:

$T_{RRC_procedure_delay}$ = 110 ms in the test.

$T_{identify\text{-}E\text{-}UTRA}$ = 800 ms in the test.

$T_{SI\text{-}E\text{-}UTRA}$ = 1280 ms, it is the time required for receiving all the relevant system information as defined in TS 36.331 for the target E-UTRA cell.

T_{RACH} = 15 ms in the test.

This gives a total of 2205 ms.

A.16.4 Timing for RedCap

A.16.4.1 UE transmit timing

A.16.4.1.1 NR UE Transmit Timing Test for FR1 for 1Rx RedCap UE

A.16.4.1.1.1 Test Purpose and environment

The purpose of this test is to verify that the UE can follow frame timing change of the connected gNodeb and that the UE initial transmit timing accuracy, maximum amount of timing change in one adjustment, minimum and maximum adjustment rate are within the specified limits. This test will verify the requirements in clause 7.1A.2.

Supported test configurations are shown in Table A.16.4.1.1.1-1.

Table A.16.4.1.1.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NR TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
3	NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 20 MHz
4	NR HD-FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

For this test a single NR cell is used. Table A.16.4.1.1.1-2 defines the parameters to be configured and strength of the transmitted signals. The transmit timing is verified by the UE transmitting SRS using the configuration defined in Table A.6.4.1.1.1-3.

Table A.16.4.1.1.1-2: Cell Specific Test Parameters for UL Transmit Timing test

Parameter	Unit	Config	Test1	Test2
SSB ARFCN		1,2,3	Freq1	Freq1
TDD configuration		1	Not Applicable	

		2	TDDConf.1.1	
		3	TDDConf.2.1	
		4	Not Applicable	
$BW_{channel}$	MHz	1	10: $N_{RB,c}$ = 52	
		2	10: $N_{RB,c}$ = 52	
		3	20: $N_{RB,c}$ = 51	
		4	10: $N_{RB,c}$ = 52	
Initial BWP Configuration		1,2,3,4	DLBWP.0.1 ULBWP.0.1	
Dedicated BWP Configuration		1,2,3,4	DLBWP.1.1 ULBWP.1.1	
DRx Cycle	ms	1,2,3,4	N/A	DRX.8 Note5
PDSCH Reference measurement channel		1	SR.1.1 FDD	
		2	SR.1.1 TDD	
		3	SR.2.1 TDD	
		4	SR.x.x HD-FDD	
RMSI CORESET Reference Channel		1	CR.1.1 FDD	
		2	CR.1.1 TDD	
		3	CR.2.1 TDD	
		4	CR.x.x HD-FDD	
Dedicated CORESET Reference Channel		1	CCR.1.1 FDD	
		2	CCR.1.1 TDD	
		3	CCR.2.1 TDD	
		4	CCR.1.1 FDD	
OCNG Patterns		1,2,3,4	OP.1	
SSB configuration		1,2,4	SSB.1 FR1	
		3	SSB. 1 RedCap FR1	
SMTC Configuration		1,2,4	SMTC.1	
		3	SMTC.2	
TRS configuration		1	TRS.1.1 FDD	
		2	TRS.1.1 TDD	
		3	TRS.1.2 TDD	
		4	TRS.1.1 FDD	
EPRE ratio of PSS to SSS	dB	1,2,3,4	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	dBm/15 kHz	1,2,3,4	-98	-98
N_{oc} Note2	dBm/SCS	1,2,4	-98	-98
		3	-95	-95

$\hat{E}_s / I_{ot}$		1,2,3,4	3	3
$\hat{E}_s / N_{oc}$		1,2,3,4	3	3
SS-RSRP Note3	dBm/SCS	1,2,4	-95	-95
		3	-92	-92
Io Note3	dBm/9.36MHz	1,2,4	-65.2	-65.2
	dBm/18. 36MHz	3	-62.36	-62.36
Propagation condition		1,2,3,4	AWGN	
SRS Config		1,2,4	SRSConf.1 Note6	SRSConf.3 Note6
		3	SRSConf.1 Note6	SRSConf.2 Note6

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: DRx related parameters are given in Table A.3.3.8-1
Note 6: SRS configs are given in Table A.6.4.1.1.1-3

A.16.4.1.1.2 Test requirements

The test requirements are the same as in clause A.6.4.1.1.2.

A.16.4.1.2 NR UE Transmit Timing Test for FR1 for 2Rx RedCap UE

A.16.4.1.2.1 Test Purpose and environment

The purpose of this test is to verify that the UE can follow frame timing change of the connected gNodeb and that the UE initial transmit timing accuracy, maximum amount of timing change in one adjustment, minimum and maximum adjustment rate are within the specified limits. This test will verify the requirements in clause 7.1A.2.

Supported test configurations are shown in Table A.16.4.1.2.1-1.

Table A.16.4.1.2.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NR TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
3	NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 20 MHz
4	NR HD-FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

For this test a single NR cell is used. Table A.16.4.1.2.1-2 defines the parameters to be configured and strength of the transmitted signals. The transmit timing is verified by the UE transmitting SRS using the configuration defined in Table A.6.4.1.1.1-3.

Table A.16.4.1.2.1-2: Cell Specific Test Parameters for UL Transmit Timing test

Parameter	Unit	Config	Test1	Test2

SSB ARFCN		1,2,3	Freq1	Freq1
TDD configuration		1	Not Applicable	
		2	TDDConf.1.1	
		3	TDDConf.2.1	
		4	Not Applicable	
$BW_{channel}$	MHz	1	10: $N_{RB,c}$ = 52	
		2	10: $N_{RB,c}$ = 52	
		3	20: $N_{RB,c}$ = 52	
		4	10: $N_{RB,c}$ = 52	
Initial BWP Configuration		1,2,3,4	DLBWP.0.1 ULBWP.0.1	
Dedicated BWP Configuration		1,2,3,4	DLBWP.1.1 ULBWP.1.1	
DRx Cycle	ms	1,2,3,4	N/A	DRX.8 Note5
PDSCH Reference measurement channel		1	SR.1.1 FDD	
		2	SR.1.1 TDD	
		3	SR.2.1 TDD	
		4	SR.1.1 FDD	
RMSI CORESET Reference Channel		1	CR.1.1 FDD	
		2	CR.1.1 TDD	
		3	CR.2.1 TDD	
		4	CR.1.1 FDD	
Dedicated CORESET Reference Channel		1	CCR.1.1 FDD	
		2	CCR.1.1 TDD	
		3	CCR.2.1 TDD	
		4	CCR.1.1 FDD	
OCNG Patterns		1,2,3,4	OP.1	
SSB configuration		1,2,4	SSB.1 FR1	
		3	SSB. 1 RedCap FR1	
SMTC Configuration		1,2,4	SMTC.1	
		3	SMTC.2	
TRS configuration		1	TRS.1.1 FDD	
		2	TRS.1.1 TDD	
		3	TRS.1.2 TDD	
		4	TRS.1.1 FDD	
EPRE ratio of PSS to SSS	dB	1,2,3,4	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	dBm/15 kHz	1,2,3,4	-98	-98
N_{oc} Note2	dBm/SCS	1,2,4	-98	-98

		3	-95	-95
$\hat{E}_s / I_{ot}$		1,2,3,4	3	3
$\hat{E}_s / N_{oc}$		1,2,3,4	3	3
SS-RSRP[Note3]	dBm/SCS	1,2,4	-95	-95
		3	-92	-92
Io[Note3]	dBm/9.36MHz	1,2,4	-65.2	-65.2
	dBm/18. 36MHz	3	-62. 36	-62. 36
Propagation condition		1,2,3,4	AWGN	
SRS Config		1,2,4	SRSConf.1[Note6]	SRSConf.3[Note6]
		3	SRSConf.1[Note6]	SRSConf.2[Note6]

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: DRx related parameters are given in Table A.3.3.8-1
Note 6: SRS configs are given in Table A.6.4.1.1.1-3

A.16.4.1.2.2 Test requirements

The test requirements are the same as in clause A.6.4.1.1.2.

A.16.4.2 UE timer accuracy

A.16.4.3 Timing advance

A.16.4.3.1 SA FR1 timing advance adjustment accuracy for 1 Rx UE

A.16.4.3.1.1 Test Purpose and Environment

The purpose of the test is to verify UE Timing Advance adjustment delay and accuracy requirement defined in clause 7.3.

A.16.4.3.1.2 Test Parameters

Supported test configurations are shown in table A.16.4.3.1.2-1. Both timing advance adjustment delay and accuracy are tested by using the parameters in table A.16.4.3.1.2-2, A.16.4.3.1.2-3 and A.16.4.3.1.2-4.

In all test cases, single cell is used. Each test consists of two successive time periods, with time duration of T1 and T2 respectively. In each time period, timing advance commands are sent to the UE and Sounding Reference Signals (SRS), as specified in table A.16.4.3.1.2-3, are sent from the UE and received by the test equipment. By measuring the reception of the SRS, the transmit timing, and hence the timing advance adjustment accuracy, can be measured.

During time period T1, the test equipment shall send one message with a Timing Advance Command MAC Control Element, as specified in Clause 6.1.3.4 in TS 38.321 [7]. The Timing Advance Command value shall be set to 31, which according to Clause 4.2 in TS 38.213 [3] results in zero adjustment of the Timing Advance. In this way, a reference value for the timing advance used by the UE is established.

During time period T2, the test equipment shall send a sequence of messages with Timing Advance Command MAC Control Elements, with Timing Advance Command value specified in table A.16.4.3.1.2-2. This value shall result in

changes of the timing advance used by the UE, and the accuracy of the change shall then be measured, using the SRS sent from the UE.

As specified in Clause 7.3.2.1, the UE adjusts its uplink timing at slot n+k for a timing advance command received in slot n. This delay must be taken into account when measuring the timing advance adjustment accuracy, via the SRS sent from the UE.

The UE Time Alignment Timer, described in Clause 5.2 in TS 38.321 [7], shall be configured so that it does not expire in the duration of the test.

Table A.16.4.3.1.2-1: Timing advance supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.4.3.1.2-2: General test parameters for timing advance

Parameter	Unit	Value	Comment
RF channel number		1	
Initial DL BWP		DLBWP.0.1	As specified in Table A.3.9.2.1-1
Dedicated DL BWP		DLBWP.1.1	As specified in Table A.3.9.2.2-1
Initial UL BWP		ULBWP.0.1	As specified in Table A.3.9.3.1-1
Dedicated UL BWP		ULBWP.1.1	As specified in Table A.3.9.3.2-1
Timing Advance Command (T_A) value during T1		31	$N_{TA_new} = N_{TA_old}$ for the purpose of establishing a reference value from which the timing advance adjustment accuracy can be measured during T2
Timing Advance Command (T_A) value during T2		39	For 15 kHz SCS $N_{TA_new} = N_{TA_old} + 8192*T_c$ For 30 kHz SCS $N_{TA_new} = N_{TA_old} + 4096*T_c$ (based on equation in clause 4.2 of TS 38.213 [3])
T1	s	5	
T2	s	5	

Table A.16.4.3.1.2-3: Cell specific test parameters for timing advance

Parameter		Unit	Test1	
			T1	T2
Duplex mode	Config 1,4		FDD	
	Config 2,3		TDD	
TDD configuration	Config 1,4		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
$BW_{channel}$	Config 1,4	MHz	10: $N_{RB,c} = 52$	
	Config 2		10: $N_{RB,c} = 52$	
	Config 3		20: $N_{RB,c} = 51$	
BWP BW	Config 1,4	MHz	10: $N_{RB,c} = 52$	
	Config 2		10: $N_{RB,c} = 52$	
	Config 3		20: $N_{RB,c} = 51$	
DRx Cycle		ms	Not Applicable	

PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2		SR.1.1 TDD
	Config 3		SR2.1 TDD
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR2.1 TDD
Dedicated CORESET Reference Channel	Config 1,4		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
TRS configuration	Config 1,4		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
OCNG Patterns			OCNG pattern 1
SMTC configuration	Config 1,2,4		SMTC.1 FR1
	Config 3		SMTC.2 FR1
SSB configuration	Config 1,2,4		SSB.1 FR1
	Config 3		SSB.1 RedCap FR1
PDSCH/PDCCH subcarrier spacing	Config 1,2,4	kHz	15 kHz
	Config 3		30 kHz
PUCCH/PUSCH subcarrier spacing	Config 1,2,4	kHz	15 kHz
	Config 3		30 kHz
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note2		dBm/15kHz	-98
N_{oc} Note2	Config 1,2,4	dBm/SCS	-98
	Config 3		-95
$\hat{E}_s / I_{ot}$		dB	3
$\hat{E}_s / N_{oc}$		dB	3
Io Note3	Config 1,2,4	dBm/ 9.36MHz	-67.57
	Config 3	dBm/ 38.16MHz	-62.58
Propagation condition		-	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.16.4.3.1.2-4: Sounding Reference Symbol Configuration for timing advance

Field		Value	Comment
c-SRS	Config 1,2,4	12	Frequency hopping is disabled
	Config 3	24	
b-SRS		0	
b-hop		0	
freqDomainPosition		0	Frequency domain position of SRS
freqDomainShift		0	
groupOrSequenceHopping		neither	No group or sequence hopping
SRS-PeriodicityAndOffset		sl5=2 for SCS 15kHz sl5=4 for SCS 30kHz	Once every 5 slots
pathlossReferenceRS		ssb-Index=0	SSB #0 is used for SRS path loss estimation
usage		Codebook	Codebook based UL transmission
startPosition		0	resourceMapping setting. SRS on last symbol of slot, and 1symbols for SRS without repetition.
nrofSymbols		n1	
repetitionFactor		n1	
combOffset-n2		0	transmissionComb setting
cyclicShift-n2		0	
nrofSRS-Ports		port1	Number of antenna ports used for SRS transmission
Note: For further information see clause 6.3.2 in TS 38.331 [2].			

A.16.4.3.1.3 Test Requirements

The UE shall apply the signalled Timing Advance value to the transmission timing at the designated activation time i.e. *k+1* slots after the reception of the timing advance command, where k=5.

The Timing Advance adjustment accuracy shall be within the limits specified in clause 7.3.2.2.

The rate of correct Timing Advance adjustments observed during repeated tests shall be at least 90%.

A.16.4.3.2 SA FR1 timing advance adjustment accuracy for 2 Rx UE

A.16.4.3.2.1 Test Purpose and Environment

The purpose of the test is to verify UE Timing Advance adjustment delay and accuracy requirement defined in clause 7.3.

A.16.4.3.2.2 Test Parameters

Supported test configurations are shown in table A.16.4.3.2.2-1. Both timing advance adjustment delay and accuracy are tested by using the parameters in table A.16.4.3.2.2-2, A.16.4.3.2.2-3 and A.16.4.3.2.2-4.

In all test cases, single cell is used. Each test consists of two successive time periods, with time duration of T1 and T2 respectively. In each time period, timing advance commands are sent to the UE and Sounding Reference Signals (SRS), as specified in table A.16.4.3.2.2-3, are sent from the UE and received by the test equipment. By measuring the reception of the SRS, the transmit timing, and hence the timing advance adjustment accuracy, can be measured.

During time period T1, the test equipment shall send one message with a Timing Advance Command MAC Control Element, as specified in Clause 6.1.3.4 in TS 38.321 [7]. The Timing Advance Command value shall be set to 31,

which according to Clause 4.2 in TS 38.213 [3] results in zero adjustment of the Timing Advance. In this way, a reference value for the timing advance used by the UE is established.

During time period T2, the test equipment shall send a sequence of messages with Timing Advance Command MAC Control Elements, with Timing Advance Command value specified in table A.16.4.3.2.2-2. This value shall result in changes of the timing advance used by the UE, and the accuracy of the change shall then be measured, using the SRS sent from the UE.

As specified in Clause 7.3.2.1, the UE adjusts its uplink timing at slot n+k for a timing advance command received in slot n. This delay must be taken into account when measuring the timing advance adjustment accuracy, via the SRS sent from the UE.

The UE Time Alignment Timer, described in Clause 5.2 in TS 38.321 [7], shall be configured so that it does not expire in the duration of the test.

Table A.16.4.3.2.2-1: Timing advance supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.4.3.2.2-2: General test parameters for timing advance

Parameter	Unit	Value	Comment
RF channel number		1	
Initial DL BWP		DLBWP.0.1	As specified in Table A.3.9.2.1-1
Dedicated DL BWP		DLBWP.1.1	As specified in Table A.3.9.2.2-1
Initial UL BWP		ULBWP.0.1	As specified in Table A.3.9.3.1-1
Dedicated UL BWP		ULBWP.1.1	As specified in Table A.3.9.3.2-1
Timing Advance Command (T_A) value during T1		31	$N_{TA_new} = N_{TA_old}$ for the purpose of establishing a reference value from which the timing advance adjustment accuracy can be measured during T2
Timing Advance Command (T_A) value during T2		39	For 15 kHz SCS $N_{TA_new} = N_{TA_old} + 8192*T_c$ For 30 kHz SCS $N_{TA_new} = N_{TA_old} + 4096*T_c$ (based on equation in clause 4.2 of TS 38.213 [3])
T1	s	5	
T2	s	5	

Table A.16.4.3.2.2-3: Cell specific test parameters for timing advance

Parameter		Unit	Test1	
			T1	T2
Duplex mode	Config 1,4		FDD	
	Config 2,3		TDD	
TDD configuration	Config 1,4		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
$BW_{channel}$	Config 1,4	MHz	10: $N_{RB,c} = 52$	
	Config 2		10: $N_{RB,c} = 52$	
	Config 3		20: $N_{RB,c} = 51$	
BWP BW	Config 1,4	MHz	10: $N_{RB,c} = 52$	

	Config 2		10: $N_{RB,c}$ = 52
	Config 3		20: $N_{RB,c}$ = 51
DRx Cycle		ms	Not Applicable
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2		SR.1.1 TDD
	Config 3		SR2.1 TDD
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR2.1 TDD
Dedicated CORESET Reference Channel	Config 1,4		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
TRS configuration	Config 1,4		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
OCNG Patterns			OCNG pattern 1
SMTC configuration	Config 1,2,4		SMTC.1 FR1
	Config 3		SMTC.2 FR1
SSB configuration	Config 1,2,4		SSB.1 FR1
	Config 3		SSB.1 RedCap FR1
PDSCH/PDCCH subcarrier spacing	Config 1,2,4	kHz	15 kHz
	Config 3		30 kHz
PUCCH/PUSCH subcarrier spacing	Config 1,2,4	kHz	15 kHz
	Config 3		30 kHz
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note2		dBm/15kHz	-98
N_{oc} Note2	Config 1,2,4	dBm/SCS	-98
	Config 3		-95
$\hat{E}_s / I_{ot}$		dB	3
$\hat{E}_s / N_{oc}$		dB	3
Io Note3	Config 1,2,4	dBm/ 9.36MHz	-67.57
	Config 3	dBm/ 38.16MHz	-62.58
Propagation condition		-	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.16.4.3.2.2-4: Sounding Reference Symbol Configuration for timing advance

Field		Value	Comment
c-SRS	Config 1,2,4	12	Frequency hopping is disabled
	Config 3	24	
b-SRS		0	
b-hop		0	
freqDomainPosition		0	Frequency domain position of SRS
freqDomainShift		0	
groupOrSequenceHopping		neither	No group or sequence hopping
SRS-PeriodicityAndOffset		sl5=2 for SCS 15kHz sl5=4 for SCS 30kHz	Once every 5 slots
pathlossReferenceRS		ssb-Index=0	SSB #0 is used for SRS path loss estimation
usage		Codebook	Codebook based UL transmission
startPosition		0	resourceMapping setting. SRS on last symbol of slot, and 1symbols for SRS without repetition.
nrofSymbols		n1	
repetitionFactor		n1	
combOffset-n2		0	transmissionComb setting
cyclicShift-n2		0	
nrofSRS-Ports		port1	Number of antenna ports used for SRS transmission
Note: For further information see clause 6.3.2 in TS 38.331 [2].			

A.16.4.3.2.3 Test Requirements

The UE shall apply the signalled Timing Advance value to the transmission timing at the designated activation time i.e. *k+1* slots after the reception of the timing advance command, where k=5.

The Timing Advance adjustment accuracy shall be within the limits specified in clause 7.3.2.2.

The rate of correct Timing Advance adjustments observed during repeated tests shall be at least 90%.

A.16.5 Signalling characteristics for RedCap

A.16.5.1 Radio link Monitoring

A.16.5.1.1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode for 1 Rx UE

A.16.5.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the 1Rx RedCap UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell for 1Rx RedCap UE. This test will partly verify the FR1 radio link monitoring requirements in clause 8.1B.2.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0, and *purpose* set to '*rlf*'. Supported test configurations are shown in table A.16.5.1.1.1-1. The test parameters are given in Tables A.16.5.1.1.1-2, A.16.5.1.1.1-3, and A.16.5.1.1.1-4 below. There is one cell (Cell 1), which is the active NR cell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.16.5.1.1 .1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1.

The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. The UE is configured to perform inter-frequency measurements using Gap Pattern ID #0 (40ms) in test 1.

Table A.16.5.1.1.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
3	TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 20 MHz
4	HD-FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.16.5.1.1.1-2: General test parameters for FR1 out-of-sync testing in non-DRX mode for 1 Rx UE

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
	Config 4		HD-FDD
$BW_{channel}$	Config 1, 4	MHz	10: $N_{RB,c}$ = 52
	Config 2		10: $N_{RB,c}$ = 52
	Config 3		20: $N_{RB,c}$ = 51
DL initial BWP configuration	Config 1, 2, 3, 4		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4		ULBWP.1.1
TDD Configuration	Config 1,4		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1, 4		CCR.1.3 FDD
	Config 2		CCR.1.3 TDD
	Config 3		CCR.2.2 TDD
SSB Configuration	Config 1, 4		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.1 RedCap FR1
SMTC Configuration	Config 1, 2, 4		SMTC.1
	Config 3		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4		15 kHz
	Config 3		30 kHz
PRACH Configuration	Config 1, 2, 4		Table A.3.8.2.1-1
	Config 3		Table A.3.8.2.1-1
SSB index assigned as RLM RS			0

OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x1 low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	16
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			*OFF*
Gap pattern ID			*gp0*
Layer 3 filtering			*Enabled*
T310 timer		ms	*0*
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1, 4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
T1		s	0.2
T2		s	0.96
T3		s	1
D1		s	0.84
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.16.5.1.1.1-3: Cell specific test parameters for FR1 (Cell 1) for out-of-sync radio link monitoring tests in non-DRX mode for 1 Rx UE

Parameter		Unit	Test 1		
			T1	T2	T3
EPRE ratio of PDCCH DMRS to SSS		dB	4		
EPRE ratio of PDCCH to PDCCH DMRS		dB	0		
EPRE ratio of PBCH DMRS to SSS		dB	0		
EPRE ratio of PBCH to PBCH DMRS		dB			
EPRE ratio of PSS to SSS		dB			
EPRE ratio of PDSCH DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1, 4	dB	1	-7	-15

	Config 2		1	-7	-15
	Config 3		1	-7	-15
N_{oc}	Config 1, 4	dBm/ 15kHz	-98		
	Config 2		-98		
	Config 3		-98		
N_{oc}	Config 1, 4	dBm/ SCS	-98		
	Config 2		-98		
	Config 3		-95		
Propagation condition			TDL-C 300ns 100Hz		
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG. Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs. Note 4: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in Figure A.16.5.1.1 .1-1. Note 5: Void					

Table A.16.5.1.1.1-4: Measurement gap configuration for out-of-sync tests in non-DRX mode for 1 Rx UE

Field	Test 1
	Value
gapOffset	0
Note: Ensure that RLM RS is partially overlapped with measurement gap	

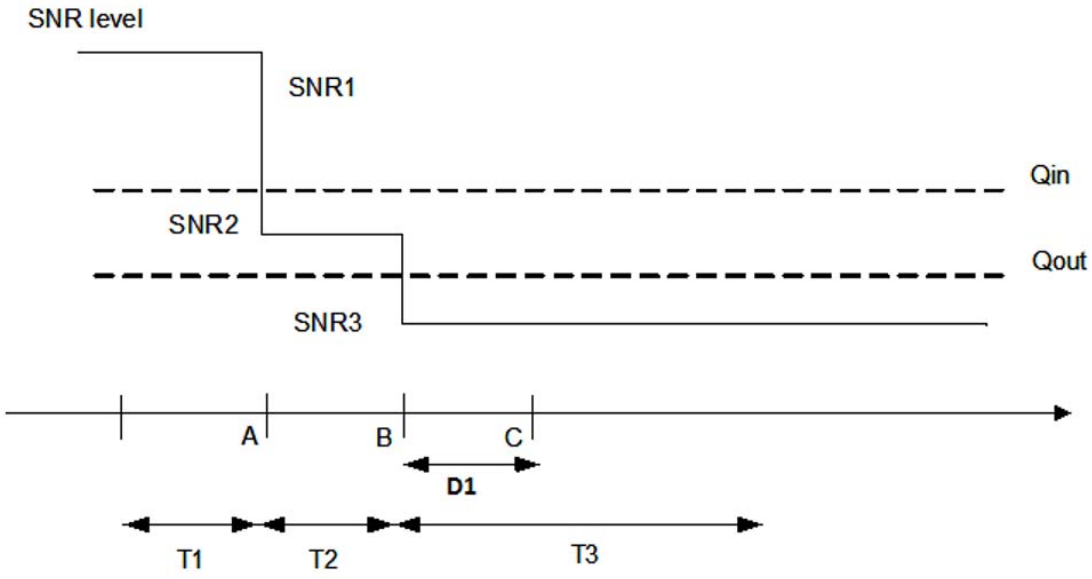

Figure A.16.5.1.1.1-1: SNR variation for out-of-sync testing

A.16.5.1.1.2 Test Requirements

The UE behaviour in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

A.16.5.1.2 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode for 2 Rx UE

A.16.5.1.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell for 2Rx RedCap UE. This test will partly verify the FR1 radio link monitoring requirements in clause 8.1B.2.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0, and *purpose* set to '*rlf*'. Supported test configurations are shown in table A.16.5.1.2.1-1. The test parameters are given in Tables A.16.5.1.2.1-2, A.16.5.1.2.1-3, and A.16.5.1.2.1-4 below. There is one cell (Cell 1), which is the active NR cell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.16.5.1.2.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. The UE is configured to perform inter-frequency measurements using Gap Pattern ID #0 (40ms) in test 1.

Table A.16.5.1.2.1-1: Supported test configurations for FR1 PCell for 2 Rx Redcap UE

Configuration	Description
1	FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
3	TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 20 MHz
4	HD-FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.16.5.1.2.1-2: General test parameters for FR1 out-of-sync testing in non-DRX mode for 2 Rx Redcap UE

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
	Config 4		HD-FDD
$BW_{channel}$	Config 1, 4	MHz	10: $N_{RB,c}$ = 52
	Config 2		10: $N_{RB,c}$ = 52
	Config 3		20: $N_{RB,c}$ = 51
DL initial BWP configuration	Config 1, 2, 3, 4		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4		DLBWP.1.1

UL initial BWP configuration	Config 1, 2, 3, 4		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4		ULBWP.1.1
TDD Configuration	Config 1, 4		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1, 4		CCR.1.3 FDD
	Config 2		CCR.1.3 TDD
	Config 3		CCR.2.2 TDD
SSB Configuration	Config 1, 4		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.1 RedCap FR1
SMTC Configuration	Config 1, 2, 4		SMTC.1
	Config 3		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4		15 kHz
	Config 3		30 kHz
PRACH Configuration	Config 1, 2,4		Table A.3.8.2.1-1
	Config 3		Table A.3.8.2.1-1
SSB index assigned as RLM RS			0
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			*OFF*
Gap pattern ID			*gp0*
Layer 3 filtering			*Enabled*
T310 timer		ms	*0*
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD

	Config 3		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1, 4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
T1		s	0.2
T2		s	0.48
T3		s	0.48
D1		s	0.44
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.16.5.1.2.1-3: Cell specific test parameters for FR1 (Cell 1) for out-of-sync radio link monitoring tests in non-DRX mode for 2 Rx Redcap UE

Parameter		Unit	Test 1		
			T1	T2	T3
EPRE ratio of PDCCH DMRS to SSS		dB	4		
EPRE ratio of PDCCH to PDCCH DMRS		dB	0		
EPRE ratio of PBCH DMRS to SSS		dB	0		
EPRE ratio of PBCH to PBCH DMRS		dB			
EPRE ratio of PSS to SSS		dB			
EPRE ratio of PDSCH DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1, 4	dB	1	-7	-15
	Config 2		1	-7	-15
	Config 3		1	-7	-15
N_{oc}	Config 1, 4	dBm/ 15kHz	-98		
	Config 2		-98		
	Config 3		-98		
N_{oc}	Config 1, 4	dBm/ SCS	-98		
	Config 2		-98		
	Config 3		-95		
Propagation condition			TDL-C 300ns 100Hz		
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG. Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs. Note 4: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in Figure A.16.5.1.2.1-1. Note 5: The SNR values are specified for testing a UE which supports 2RX on at least one band.					

Table A.16.5.1.2.1-4: Measurement gap configuration for out-of-sync tests in non-DRX mode

Field	Test 1
	Value
gapOffset	0
Note: Ensure that RLM RS is partially overlapped with measurement gap	

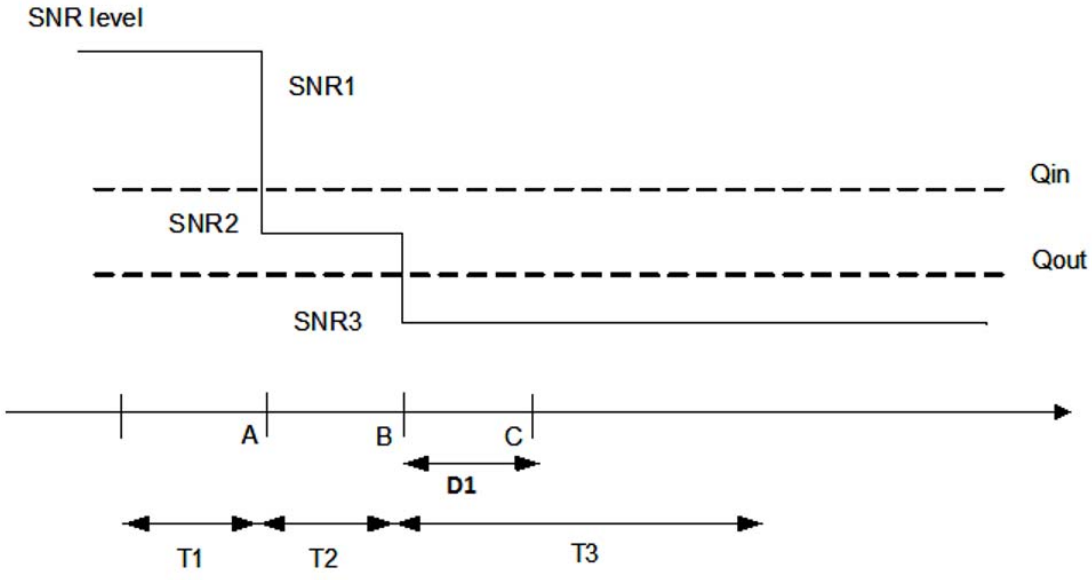

Figure A.16.5.1.2.1-1: SNR variation for out-of-sync testing

A.16.5.1.2.2 Test Requirements

The UE behaviour in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

A.16.5.1.3 Radio Link Monitoring In-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode for 1 Rx UE

A.16.5.1.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell. This test will partly verify the FR1 radio link monitoring requirements in clause 8.1B.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0, and *purpose* set to '*rlf*'. Supported test configurations are shown in table A.16.5.1.3.1-1. The test parameters are given in Tables A.16.5.1.3.1-2, and A.16.5.1.3.1-3 below. There is one cell (Cell 1), which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.16.5.1.3.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms.

Table A.16.5.1.3.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
3	TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 20 MHz
4	HD-FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.16.5.1.3.1-2: General test parameters for FR1 in-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2,3		TDD
	Config 4		HD-FDD
$BW_{channel}$	Config 1,4	MHz	10: $N_{RB,c}$ = 52
	Config 2		10: $N_{RB,c}$ = 52
	Config 3		20: $N_{RB,c}$ = 51
DL initial BWP configuration	Config 1, 2, 3, 4		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4		ULBWP.1.1
TDD Configuration	Config 1,4		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1,4		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
SSB Configuration	Config 1,4		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.1 RedCap FR1
SMTC Configuration	Config 1, 2, 3, 4		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4		15 kHz
	Config 3		30 kHz
PRACH Configuration	Config 1, 2, 3, 4		Table A.3.8.2.1-1
SSB index assigned as RLM RS			0
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x1 Low

In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	16
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			*OFF*
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*
T310 timer		ms	1000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1, 4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
T1		s	0.2
T2		s	0.2
T3		s	0.24
T4		s	0.2
T5		s	0.88
D1		s	0.84
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.16.5.1.3.1-3: Cell specific test parameters for FR1 (Cell 1) for in-sync radio link monitoring tests in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0				
EPRE ratio of PBCH DMRS to SSS		dB	0				
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1,4	dB	1	-7	-15	-4.5	1
	Config 2		1	-7	-15	-4.5	1
	Config 3		1	-7	-15	-4.5	1
N_{oc}	Config 1, 4	dBm/ 15 kHz	-98				
	Config 2		-98				
	Config 3		-98				
N_{oc}	Config 1, 4	dBm/ SCS	-98				
	Config 2		-98				
	Config 3		-95				
Propagation condition			TDL-C 300ns 100Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 4: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in Figure A.16.5.1.3.1-1.
Note 5: Void.

Table A.16.5.1.3.1-4: Void

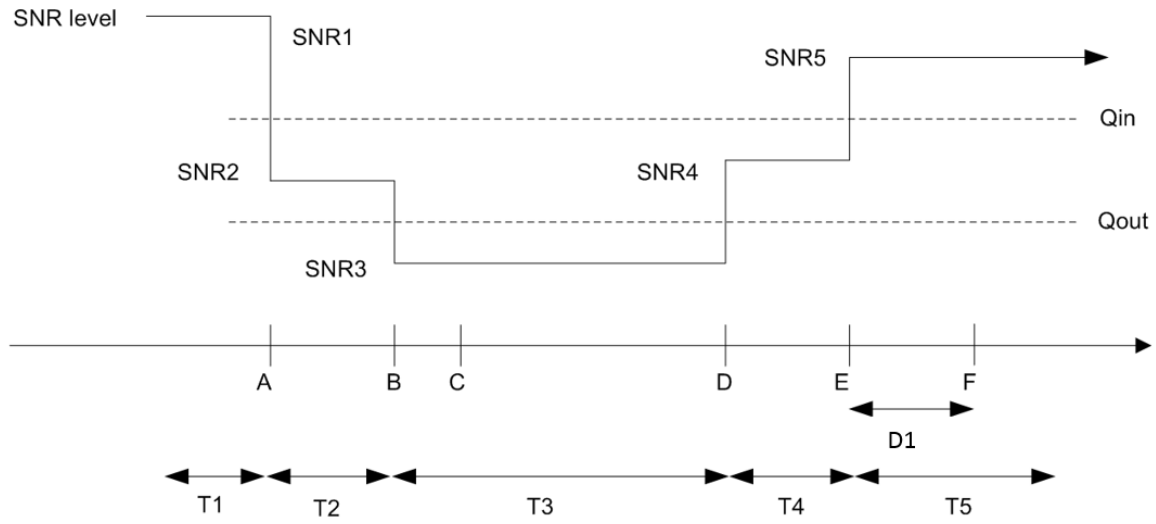

Figure A.16.5.1.3.1-1: SNR variation for in-sync testing

A.16.5.1.3.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90%.

A.16.5.1.4 Radio Link Monitoring In-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode for 2 Rx UE

A.16.5.1.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell. This test will partly verify the FR1 radio link monitoring requirements in clause 8.1B.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0, and *purpose* set to '*rlf*'. Supported test configurations are shown in table A.16.5.1.4.1-1. The test parameters are given in Tables A.16.5.1.4.1-2, and A.16.5.1.4.1-3 below. There is one cell (Cell 1), which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.16.5.1.4.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms.

Table A.16.5.1.4.1-1: Supported test configurations for FR1 PCell

Configuration	Description

1	FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
3	TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 20 MHz
4	HD-FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.16.5.1.4.1-2: General test parameters for FR1 in-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
	Config 4		HD-FDD
$BW_{channel}$	Config 1, 4	MHz	10: $N_{RB,c}$ = 52
	Config 2		10: $N_{RB,c}$ = 52
	Config 3		20: $N_{RB,c}$ = 51
DL initial BWP configuration	Config 1, 2, 3, 4		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4		ULBWP.1.1
TDD Configuration	Config 1, 4		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1, 4		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
SSB Configuration	Config 1, 4		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.1 RedCap FR1
SMTC Configuration	Config 1, 2, 3, 4		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4		15 kHz
	Config 3		30 kHz
PRACH Configuration	Config 1, 2, 3 ,4		Table A.3.8.2.1-1
SSB index assigned as RLM RS			0
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
In sync transmission parameters	DCI format		1-0

	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			*OFF*
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*
T310 timer		ms	1000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1, 4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
T1		s	0.2
T2		s	0.2
T3		s	0.24
T4		s	0.2
T5		s	0.88
D1		s	0.84
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.16.5.1.4.1-3: Cell specific test parameters for FR1 (Cell 1) for in-sync radio link monitoring tests in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0				
EPRE ratio of PBCH DMRS to SSS		dB	0				
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1, 4	dB	1	-7	-15	-4.5	1
	Config 2		1	-7	-15	-4.5	1
	Config 3		1	-7	-15	-4.5	1
N_{oc}	Config 1, 4	dBm/ 15 kHz	-98				
	Config 2		-98				
	Config 3		-98				
N_{oc}	Config 1, 4	dBm/ SCS	-98				
	Config 2		-98				
	Config 3		-95				
Propagation condition			TDL-C 300ns 100Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 4: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in Figure A.16.5.1.4.1-1.
Note 5: The SNR values are specified for testing a UE which supports 2RX on at least one band.

Table A.16.5.1.4.1-4: Void

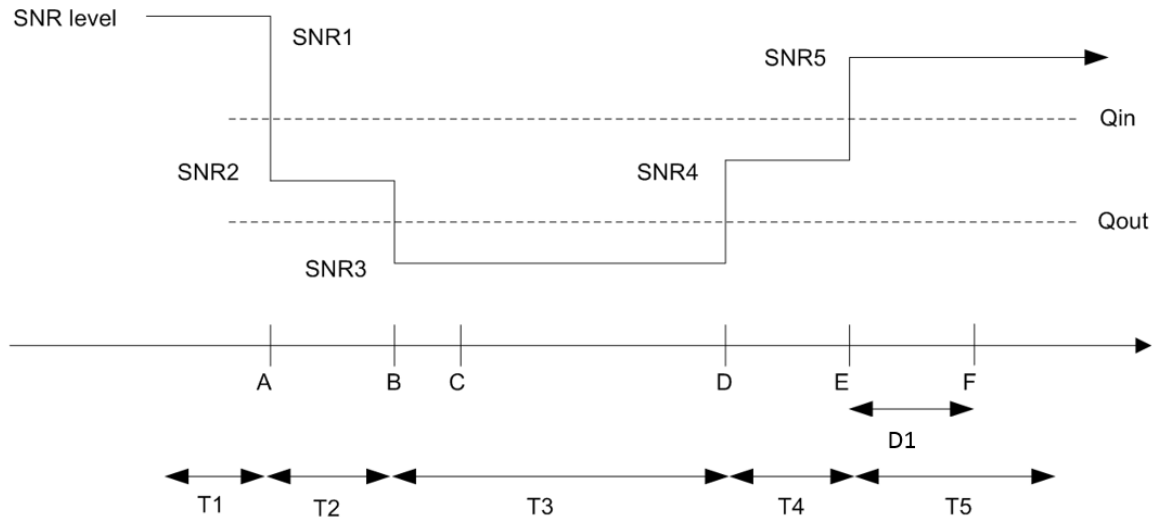

Figure A.16.5.1.4.1-1: SNR variation for in-sync testing

A.16.5.1.4.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90%.

A.16.5.1.5 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode for 1 Rx UE

A.16.5.1.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell when DRX is used. This test will partly verify the FR1 radio link monitoring requirements in clause 8.1B.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0, and *purpose* set to '*rlf*'. Supported test configurations are shown in table A.16.5.1.5.1-1. The test parameters are given in Tables A.16.5.1.5.1-2, and A.16.5.1.5.1-3. There is one cell (Cell 1), which is the active NR cell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.16.5.1.5.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

Table A.16.5.1.5.1-1: Supported test configurations for FR1 PCell

Configuration	Description

1	FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
3	TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 20 MHz
4	HD-FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.16.5.1.5.1-2: General test parameters for FR1 out-of-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
	Config 4		HD-FDD
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52
	Config 2		10: $N_{RB,c}$ = 52
	Config 3		20: $N_{RB,c}$ = 52
	Config 4		10: $N_{RB,c}$ = 52
DL initial BWP configuration	Config 1, 2, 3, 4		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4		ULBWP.1.1
TDD Configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
	Config 4		Not Applicable
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1, 4		CCR.1.3 FDD
	Config 2		CCR.1.3 TDD
	Config 3		CCR.2.2 TDD
SSB Configuration	Config 1, 4		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.1 RedCap FR1
SMTC Configuration	Config 1, 2, 4		SMTC.1
	Config 3		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4		15 kHz
	Config 3		30 kHz
PRACH Configuration	Config 1, 2, 4		Table A.3.8.2.1-1

	Config 3		Table A.3.8.2.1-1
SSB index assigned as RLM RS			0
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x1 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	16
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX Configuration			DRX.3
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*
T310 timer		ms	*0*
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1, 4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
T1		s	0.2
T2		s	0.68
T3		s	0.68
D1		s	0.64
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.16.5.1.5.1-3: Cell specific test parameters for FR1 (Cell 1) for out-of-sync radio link monitoring tests in DRX mode

Parameter	Unit	Test 1		
		T1	T2	T3
EPRE ratio of PDCCH DMRS to SSS	dB	4		
EPRE ratio of PDCCH to PDCCH DMRS	dB	0		
EPRE ratio of PBCH DMRS to SSS	dB	0		
EPRE ratio of PBCH to PBCH DMRS	dB			

EPRE ratio of PSS to SSS		dB			
EPRE ratio of PDSCH DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1, 4	dB	1	-7	-15
	Config 2		1	-7	-15
	Config 3		1	-7	-15
N_{oc}	Config 1, 4	dBm/15 kHz	-98		
	Config 2		-98		
	Config 3		-98		
N_{oc}	Config 1, 4	dBm/SCS	-98		
	Config 2		-98		
	Config 3		-95		
Propagation condition			TDL-C 300ns 100Hz		
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG. Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs. Note 4: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in Figure A.16.5.1.5.1-1.					

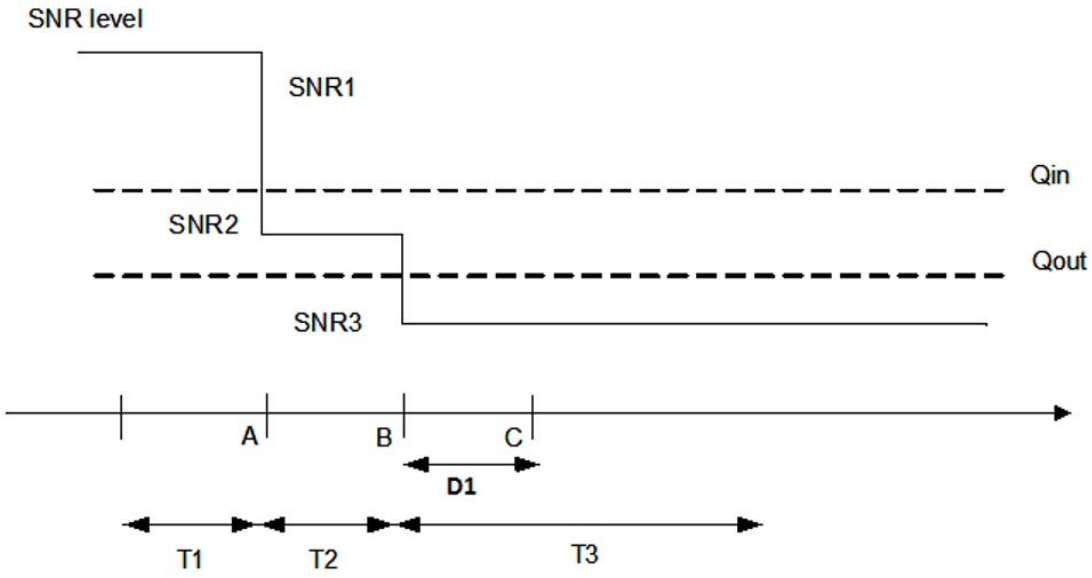

Figure A.16.5.1.5.1-1: SNR variation for out-of-sync testing

A.16.5.1.5.2 Test Requirements

The UE behaviour in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

A.16.5.1.6 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode for 2 Rx UE

A.16.5.1.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell when DRX is used. This test will partly verify the FR1 radio link monitoring requirements in clause 8.1B.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0, and *purpose* set to '*rlf*'. Supported test configurations are shown in table A.16.5.1.6.1-1. The test parameters are given in Tables A.16.5.1.6.1-2, and A.16.5.1.6.1-3. There is one cell (Cell 1), which is the active NR cell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.16.5.1.6.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

Table A.16.5.1.6.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
3	TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 20 MHz
4	HD-FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.16.5.1.6.1-2: General test parameters for FR1 out-of-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
	Config 4		HD-FDD
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52
	Config 2		10: $N_{RB,c}$ = 52
	Config 3		20: $N_{RB,c}$ = 52
	Config 4		10: $N_{RB,c}$ = 52
DL initial BWP configuration	Config 1, 2, 3, 4		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4		ULBWP.1.1

TDD Configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
	Config 4		Not Applicable
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1, 4		CCR.1.3 FDD
	Config 2		CCR.1.3 TDD
	Config 3		CCR.2.2 TDD
SSB Configuration	Config 1, 4		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.1 RedCap FR1
SMTC Configuration	Config 1, 2, 4		SMTC.1
	Config 3		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4		15 kHz
	Config 3		30 kHz
PRACH Configuration	Config 1, 2, 4		Table A.3.8.2.1-1
	Config 3		Table A.3.8.2.1-1
SSB index assigned as RLM RS			0
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX Configuration			DRX.3
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*
T310 timer		ms	*0*
T311 timer		ms	1000

N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1, 4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
T1		s	0.2
T2		s	0.68
T3		s	0.68
D1		s	0.64
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.16.5.1.6.1-3: Cell specific test parameters for FR1 (Cell 1) for out-of-sync radio link monitoring tests in DRX mode

Parameter		Unit	Test 1		
			T1	T2	T3
EPRE ratio of PDCCH DMRS to SSS		dB	4		
EPRE ratio of PDCCH to PDCCH DMRS		dB	0		
EPRE ratio of PBCH DMRS to SSS		dB	0		
EPRE ratio of PBCH to PBCH DMRS		dB			
EPRE ratio of PSS to SSS		dB			
EPRE ratio of PDSCH DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1, 4	dB	1	-7	-15
	Config 2		1	-7	-15
	Config 3		1	-7	-15
N_{oc}	Config 1, 4	dBm/15 kHz	-98		
	Config 2		-98		
	Config 3		-98		
N_{oc}	Config 1, 4	dBm/SCS	-98		
	Config 2		-98		
	Config 3		-95		
Propagation condition			TDL-C 300ns 100Hz		
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG. Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs. Note 4: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in Figure A.16.5.1.6.1-1. Note 5: The SNR values are specified for testing a UE which supports 2RX on at least one band.					

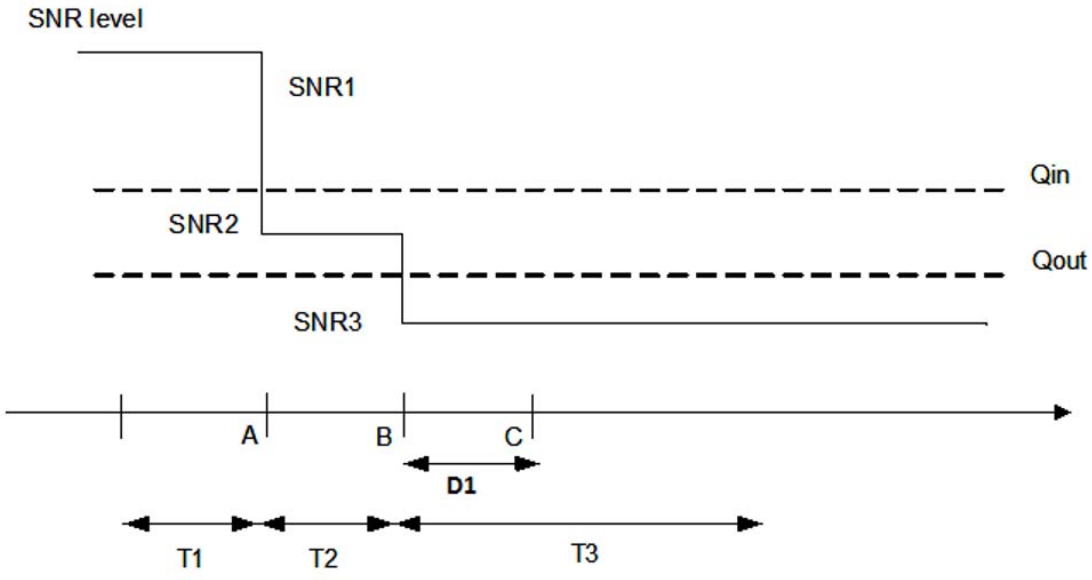

Figure A.16.5.1.6.1-1: SNR variation for out-of-sync testing

A.16.5.1.6.2 Test Requirements

The UE behaviour in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

A.16.5.1.7 Radio Link Monitoring In-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode for 1 Rx UE

A.16.5.1.7.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell when DRX is used. This test will partly verify the FR1 radio link monitoring requirements in clause 8.1B.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0, and *purpose* set to '*rlf*'. Supported test configurations are shown in table A.16.5.1.7.1-1. The test parameters are given in Tables A.16.5.1.7.1-2, and A.16.5.1.7.1-3. There is one cell (Cell 1), which is the active NR cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.16.5.1.7.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to

send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

Table A.16.5.1.7.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
3	TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 20 MHz
4	HD-FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.16.5.1.7.1-2: General test parameters for FR1 in-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
	Config 4		HD-FDD
$BW_{channel}$	Config 1, 4	MHz	10: $N_{RB,c}$ = 52
	Config 2		10: $N_{RB,c}$ = 52
	Config 3		20: NRB,c = 51
DL initial BWP configuration	Config 1, 2, 3, 4		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4		ULBWP.1.1
TDD Configuration	Config 1, 4		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1, 4		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
SSB Configuration	Config 1, 4		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.1 RedCap FR1
SMTC Configuration	Config 1, 2, 3, 4		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4		15 kHz
	Config 3		30 kHz
PRACH Configuration	Config 1, 2, 3, 4		Table A.3.8.2.1-1
SSB index assigned as RLM RS			0
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x1 Low
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8

	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	16
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX Configuration			DRX.3
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*
T310 timer		ms	2000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1,4		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1,4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
T1		s	0.2
T2		s	0.2
T3		s	0.64
T4		s	0.2
T5		s	0.88
D1		s	0.84
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.16.5.1.7.1-3: Cell specific test parameters for FR1 (Cell 1) for in-sync radio link monitoring tests in DRX mode

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS	dB	0				
EPRE ratio of PDCCH to PDCCH DMRS	dB	0				
EPRE ratio of PBCH DMRS to SSS	dB	0				
EPRE ratio of PBCH to PBCH DMRS	dB					
EPRE ratio of PSS to SSS	dB					
EPRE ratio of PDSCH DMRS to SSS	dB					
EPRE ratio of PDSCH to PDSCH DMRS	dB					
EPRE ratio of OCNG DMRS to SSS	dB					
EPRE ratio of OCNG to OCNG DMRS	dB					

SNR on RLM-RS	Config 1, 4	dB	1	-7	-15	-4.5	1
	Config 2		1	-7	-15	-4.5	1
	Config 3		1	-7	-15	-4.5	1
N_{oc}	Config 1, 4	dBm/15 kHz	-98				
	Config 2		-98				
	Config 3		-98				
N_{oc}	Config 1, 4	dBm/SCS	-98				
	Config 2		-98				
	Config 3		-95				
Propagation condition			TDL-C 300ns 100Hz				
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG. Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs. Note 4: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in Figure A.16.5.1.7.1-1. Note 5: Void.							

Table A.16.5.1.7.1-4: Void

Table A.16.5.1.7.1-5: Void

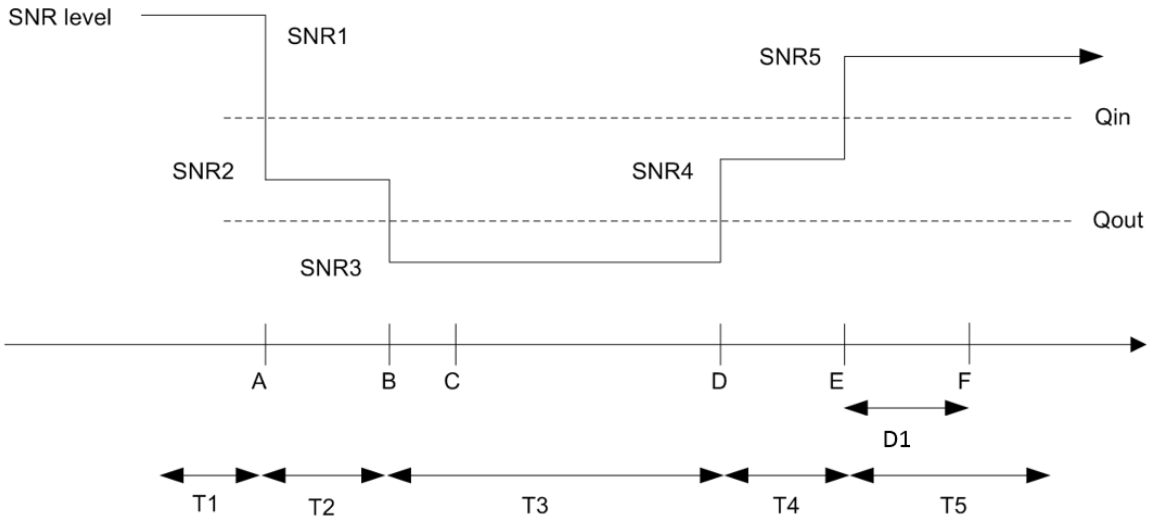

Figure A.16.5.1.7.1-1: SNR variation for in-sync testing.

A.16.5.1.7.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90%.

A.16.5.1.8 Radio Link Monitoring In-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode for 2 Rx UE

A.16.5.1.8.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell when DRX is used. This test will partly verify the FR1 radio link monitoring requirements in clause 8.1B.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0, and *purpose* set to '*rlf*'. Supported test configurations are shown in table A.16.5.1.8.1-1. The test parameters are given in Tables A.16.5.1.8.1-2, and A.16.5.1.8.1-3. There is one cell (Cell 1), which is the active NR cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.16.5.1.8.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

Table A.16.5.1.8.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
3	TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 20 MHz
4	HD-FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.16.5.1.8.1-2: General test parameters for FR1 in-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
	Config 4		HD-FDD
$BW_{channel}$	Config 1, 4	MHz	10: $N_{RB,c}$ = 52
	Config 2		10: $N_{RB,c}$ = 52
	Config 3		20: $N_{RB,c}$ = 51
DL initial BWP configuration	Config 1, 2, 3, 4		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4		ULBWP.1.1
TDD Configuration	Config 1, 4		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD

Dedicated CORESET Reference Channel		Config 1, 4		CCR.1.1 FDD
		Config 2		CCR.1.1 TDD
		Config 3		CCR.2.1 TDD
SSB Configuration		Config 1, 4		SSB.1 FR1
		Config 2		SSB.1 FR1
		Config 3		SSB.1 RedCap FR1
SMTC Configuration		Config 1, 2, 3, 4		SMTC.1
PDSCH/PDCCH subcarrier spacing		Config 1, 2, 4		15 kHz
		Config 3		30 kHz
PRACH Configuration		Config 1, 2, 3, 4		Table A.3.8.2.1-1
SSB index assigned as RLM RS				0
OCNG parameters				OP.1
CP length				Normal
Correlation Matrix and Antenna Configuration				2x2 Low
In sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	4
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	0
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
Out of sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	4
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
DRX Configuration				DRX.3
Gap pattern ID				N.A.
Layer 3 filtering				*Enabled*
T310 timer			ms	2000
T311 timer			ms	1000
N310				1
N311				1
CSI-RS configuration for CSI reporting		Config 1, 4		CSI-RS.1.1 FDD
		Config 2		CSI-RS.1.1 TDD
		Config 3		CSI-RS.2.1 TDD
CSI-RS for tracking		Config 1, 4		TRS.1.1 FDD
		Config 2		TRS.1.1 TDD
		Config 3		TRS.1.2 TDD
T1			s	0.2
T2			s	0.2
T3			s	0.64

T4	s	0.2
T5	s	0.88
D1	s	0.84
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.		

Table A.16.5.1.8.1-3: Cell specific test parameters for FR1 (Cell 1) for in-sync radio link monitoring tests in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0				
EPRE ratio of PBCH DMRS to SSS		dB	0				
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1, 4	dB	1	-7	-15	-4.5	1
	Config 2		1	-7	-15	-4.5	1
	Config 3		1	-7	-15	-4.5	1
N_{oc}	Config 1, 4	dBm/15 kHz	-98				
	Config 2		-98				
	Config 3		-98				
N_{oc}	Config 1, 4	dBm/SCS	-98				
	Config 2		-98				
	Config 3		-95				
Propagation condition			TDL-C 300ns 100Hz				
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG. Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs. Note 4: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in Figure A.16.5.1.8.1-1. Note 5: The SNR values are specified for testing a UE which supports 2RX on at least one band..								

Table A.16.5.1.8.1-4: Void

Table A.16.5.1.8.1-5: Void

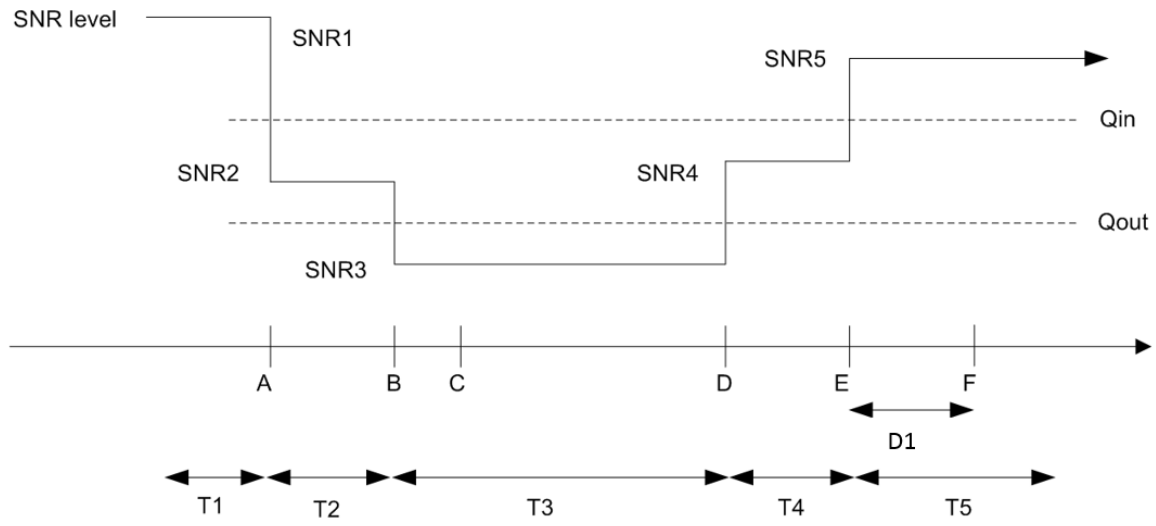

Figure A.16.5.1.8.1-1: SNR variation for in-sync testing.

A.16.5.1.8.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90%.

A.16.5.1.9 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode for 1 Rx UE

A.16.5.1.9.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when no DRX is used for 1 Rx RedCap UE. This test will partly verify the FR1 PCell CSI-RS Out-of-sync radio link monitoring requirements in clause 8.1B.3.

The test parameters are given in Tables A.16.5.1.9.1-1, A.16.5.1.9.1-2, A.16.5.1.9.1-3, and A.16.5.1.9.1-3A below. There is one cell, cell 1 which is the PCell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.16.5.1.9.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting of 5ms. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test. In the test, SSB0 is configured as the BFD-RS.

Table A.16.5.1.9.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30 kHz SSB SCS, 20 MHz bandwidth
4	HD-FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.16.5.1.9.1-2: General test parameters for FR1 PCell for CSI-RS out-of-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
	Config 4		HD-FDD
TDD Configuration	Config 1,4		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
DL initial BWP configuration	Config 1, 2, 3, 4		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1, 4		CCR.1.3 FDD
	Config 2		CCR.1.3 TDD
	Config 3		CCR.2.2 TDD
SSB Configuration	Config 1, 4		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.1 RedCap FR1
SMTC Configuration	Config 1, 2, 4		SMTC.1
	Config 3		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4		15 kHz
	Config 3		30 kHz
TRS configuration	Config 1, 4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
CSI-RS for RLM	Config 1, 4		Resource #4 in TRS.1.1 FDD
	Config 2		Resource #4 in TRS.1.1 TDD
	Config 3		Resource #4 in TRS.1.2 TDD
TCI configuration for PDCCH/PDSCH			TCI.State. 2
OCNG parameters			OP.1
CP length			Normal

Correlation Matrix and Antenna Configuration			2x1 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	16
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			*OFF*
Gap pattern ID			*gp0*
Layer 3 filtering			*Enabled*
T310 timer		ms	*0*
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
T1		s	0.2
T2		s	0.8
T3		s	0.88
D1		s	0.84
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.16.5.1.9.1-3: Cell specific test parameters for FR1 for CSI-RS out-of-sync radio link monitoring in non-DRX mode

Parameter		Unit	Test 1		
			T1	T2	T3
EPRE ratio of PDCCH DMRS to SSSPDCCH_beta		dB	4		
EPRE ratio of PDCCH to PDCCH DMRSPDCCH_DMRS_beta		dB			
EPRE ratio of PBCH DMRS to SSSPBCH_beta		dB	0		
EPRE ratio of PBCH to PBCH DMRSPSS_beta		dB			
EPRE ratio of PSS to SSSSSS_beta		dB			
EPRE ratio of PDSCH DMRS to SSS PDSCH_beta		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1,4	dB	1	-7	-15
	Config 2		1	-7	-15

	Config 3		1	-7	-15
N_{oc}	Config 1,4	dBm/15kHz	-98		
	Config 2		-98		
	Config 3		-98		
Propagation condition			TDL-C 300ns 100Hz		

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.16.5.1.9.1-1.

Table A.16.5.1.9.1-3A: Measurement gap configuration for FR1 CSI-RS out-of-sync radio link monitoring in non-DRX mode

Field	Test 1
	Value
gapOffset	0
Note 1: Void	

Table A.16.5.1.9.1-4: Void

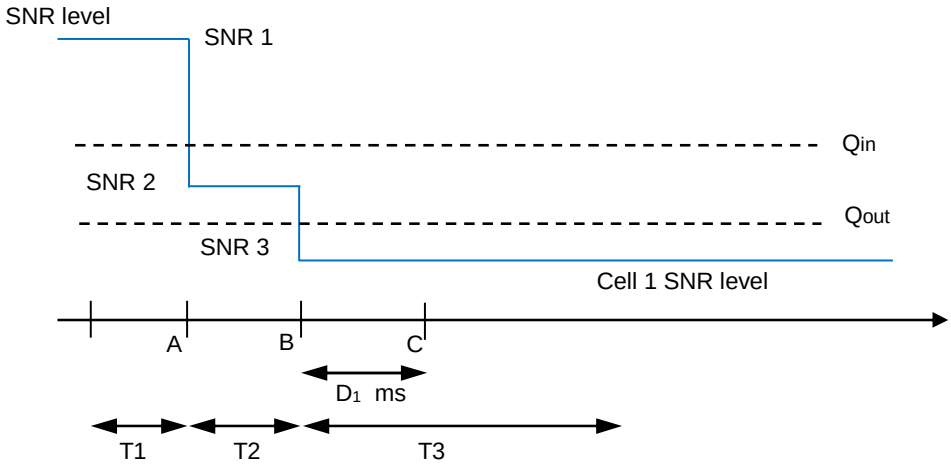

Figure A.16.5.1.9.1-1: SNR variation for CSI-RS out-of-sync testing

A.16.5.1.9.2 Test Requirements

The UE behaviour during time durations T1, T2, and T3 shall be as follows:

During time durations T1, T2 and T3, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

The UE shall stop transmitting uplink signal in Cell 1 no later than time point C (D_1 ms after the start of the time duration T3) on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.16.5.1.10 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode for 2 Rx UE

A.16.5.1.10.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when no DRX is used for 2 Rx RedCap UE. This test will partly verify the FR1 PCell CSI-RS Out-of-sync radio link monitoring requirements in clause 8.1B.3.

The test parameters are given in Tables A.16.5.1.10.1-1, A.16.5.1.10.1-2, A.16.5.1.10.1-3, and A.16.5.1.10.1-3A below. There is one cell, cell 1 which is the PCell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.16.5.1.10.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting of 5ms. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test. In the test, SSB0 is configured as the BFD-RS.

Table A.16.5.1.10.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30 kHz SSB SCS, 20 MHz bandwidth
4	HD-FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.16.5.1.10.1-2: General test parameters for FR1 PCell for CSI-RS out-of-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
	Config 4		HD-FDD
TDD Configuration	Config 1,4		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
DL initial BWP configuration	Config 1, 2, 3, 4		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4		ULBWP.1.1

RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1, 4		CCR.1.3 FDD
	Config 2		CCR.1.3 TDD
	Config 3		CCR.2.2 TDD
SSB Configuration	Config 1, 4		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.1 RedCap FR1
SMTC Configuration	Config 1, 2, 4		SMTC.1
	Config 3		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4		15 kHz
	Config 3		30 kHz
TRS configuration	Config 1, 4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
CSI-RS for RLM	Config 1, 4		Resource #4 in TRS.1.1 FDD
	Config 2		Resource #4 in TRS.1.1 TDD
	Config 3		Resource #4 in TRS.1.2 TDD
TCI configuration for PDCCH/PDSCH			TCI.State. 2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			*OFF*
Gap pattern ID			*gp0*
Layer 3 filtering			*Enabled*
T310 timer		ms	*0*
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
T1		s	0.2
T2		s	0.48
T3		s	0.48
D1		s	0.44
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.16.5.1.10.1-3: Cell specific test parameters for FR1 for CSI-RS out-of-sync radio link monitoring in non-DRX mode

Parameter		Unit	Test 1		
			T1	T2	T3
EPRE ratio of PDCCH DMRS to SSSPDCCH_beta		dB	4		
EPRE ratio of PDCCH to PDCCH DMRSPDCCH_DMRS_beta		dB			
EPRE ratio of PBCH DMRS to SSSPBCH_beta		dB	0		
EPRE ratio of PBCH to PBCH DMRSPSS_beta		dB			
EPRE ratio of PSS to SSSSSS_beta		dB			
EPRE ratio of PDSCH DMRS to SSS PDSCH_beta		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1,4	dB	1	-7	-15
	Config 2		1	-7	-15
	Config 3		1	-7	-15
N_{oc}	Config 1,4	dBm/15kHz	-98		
	Config 2		-98		
	Config 3		-98		
Propagation condition			TDL-C 300ns 100Hz		

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.16.5.1.10.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band.

Table A.16.5.1.10.1-3A: Measurement gap configuration for FR1 CSI-RS out-of-sync radio link monitoring in non-DRX mode

Field	Test 1
	Value
gapOffset	0
Note 1: Void	

Table A.16.5.1.10.1-4: Void

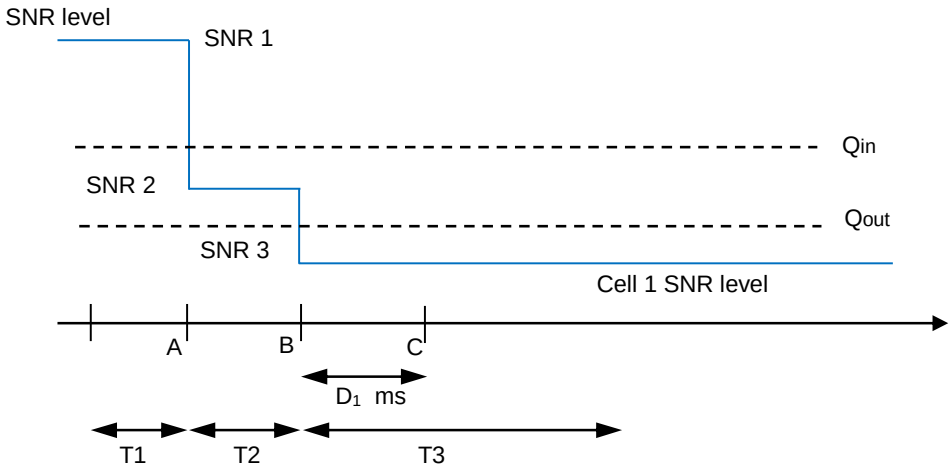

Figure A.16.5.1.10.1-1: SNR variation for CSI-RS out-of-sync testing

A.16.5.1.10.2 Test Requirements

The UE behaviour during time durations T1, T2, and T3 shall be as follows:

During time durations T1, T2 and T3, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

The UE shall stop transmitting uplink signal in Cell 1 no later than time point C (D_1 ms after the start of the time duration T3) on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.16.5.1.11 Radio Link Monitoring In-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode for 1 Rx UE

A.16.5.1.11.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when no DRX is used. This test will partly verify the FR1 PCell CSI-RS In-sync radio link monitoring requirements in clause 8.1B.3.

The test parameters are given in Tables A.16.5.1.11.1-1, A.16.5.1.11.1-2, and A.16.5.1.11.1-3 below. There is one cells, cell 1which is the PCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.16.5.1.11.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. In the test, DRX configuration is not enabled. In the test, SSB0 is configured as the BFD-RS.

Table A.16.5.1.11.1-1: Supported test configurations for FR1 PCell

Configuration	Description

1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30kHz SSB SCS, 40 MHz bandwidth
4	HD-FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.16.5.1.11.1-2: General test parameters for FR1 PCell for CSI-RS in-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
	Config 4		HD-FDD
TDD Configuration	Config 1, 4		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
DL initial BWP configuration	Config 1, 2, 3, 4		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1, 4		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
SSB Configuration	Config 1, 4		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTC Configuration	Config 1, 2, 4		SMTC.1
	Config 3		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4		15 kHz
	Config 3		30 kHz
TRS configuration	Config 1, 4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
CSI-RS for RLM	Config 1, 4		Resource #4 in TRS.1.1 FDD
	Config 2		Resource #4 in TRS.1.1 TDD
	Config 3		Resource #4 in TRS.1.2 TDD
TCI configuration for PDCCH/PDSCH			TCI.State. 2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x1 Low

Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	16
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			*OFF*
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*
T310 timer		ms	2000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1,4		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
T1		s	0.2
T2		s	0.2
T3		s	0.88
T4		s	0.2
T5		s	0.88
T6		s	0.24
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.16.5.1.11.1-3: Cell specific test parameters for FR1 for CSI-RS in-sync radio link monitoring in non-DRX mode

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSSPDCCH_beta	dB	4				
EPRE ratio of PDCCH to PDCCH DMRSPDCCH_DMRS_beta	dB					
EPRE ratio of PBCH DMRS to SSSPBCH_beta	dB	0				
EPRE ratio of PBCH to PBCH DMRSPSS_beta	dB					

EPRE ratio of PSS to SSSSSS_beta		dB					
EPRE ratio of PDSCH DMRS to SSS PDSCH_beta		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1,4	dB	1	-7	-15	-4.5	1
	Config 2		1	-7	-15	-4.5	1
	Config 3		1	-7	-15	-4.5	1
N_{oc}	Config 1,4	dBm/15kHz	-98				
	Config 2		-98				
	Config 3		-98				
Propagation condition			TDL-C 300ns 100Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure A.16.5.1.11.1-1.

Table A.16.5.1.11.1-4: Void

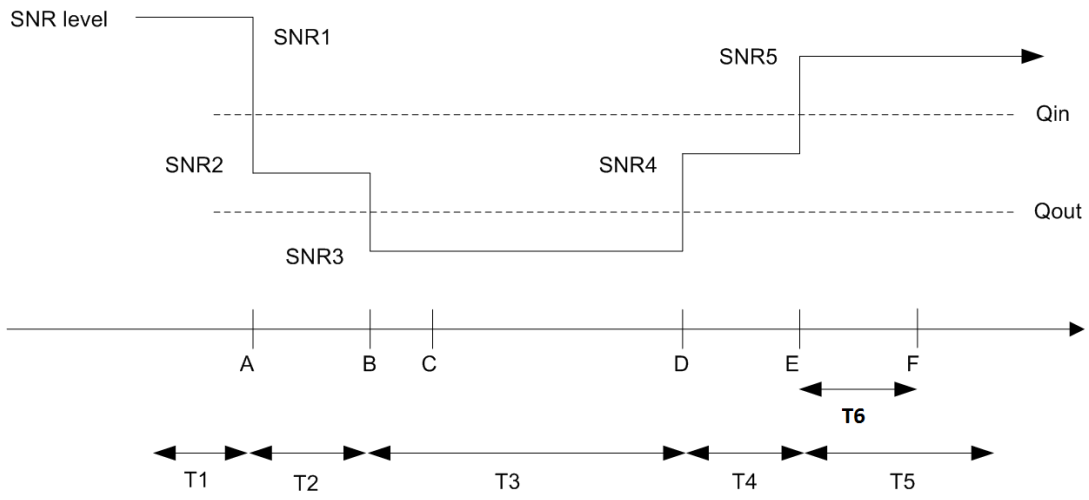

Figure A.16.5.1.11.1-1: SNR variation for CSI-RS in-sync testing

A.16.5.1.11.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (T6 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.16.5.1.12 Radio Link Monitoring In-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode for 2 Rx UE

A.16.5.1.12.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when no DRX is used. This test will partly verify the FR1 PCell CSI-RS In-sync radio link monitoring requirements in clause 8.1B.3.

The test parameters are given in Tables A.16.5.1.12.1-1, A.16.5.1.12.1-2, and A.16.5.1.12.1-3 below. There is one cells, cell 1which is the PCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.16.5.1.12.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. In the test, DRX configuration is not enabled. In the test, SSB0 is configured as the BFD-RS.

Table A.16.5.1.12.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30kHz SSB SCS, 40 MHz bandwidth
4	HD-FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.16.5.1.12.1-2: General test parameters for FR1 PCell for CSI-RS in-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
	Config 4		HD-FDD
TDD Configuration	Config 1, 4		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
DL initial BWP configuration	Config 1, 2, 3, 4		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4		ULBWP.1.1

RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1, 4		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
SSB Configuration	Config 1, 4		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.1 RedCap FR1
SMTC Configuration	Config 1, 2, 4		SMTC.1
	Config 3		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4		15 kHz
	Config 3		30 kHz
TRS configuration	Config 1, 4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
CSI-RS for RLM	Config 1, 4		Resource #4 in TRS.1.1 FDD
	Config 2		Resource #4 in TRS.1.1 TDD
	Config 3		Resource #4 in TRS.1.2 TDD
TCI configuration for PDCCH/PDSCH			TCI.State. 2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			*OFF*
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*

T310 timer		ms	1000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1,4		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
T1		s	0.2
T2		s	0.2
T3		s	0.44
T4		s	0.2
T5		s	0.88
T6		s	0.24
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.16.5.1.12.1-3: Cell specific test parameters for FR1 for CSI-RS in-sync radio link monitoring in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSSPDCCH_beta		dB	4				
EPRE ratio of PDCCH to PDCCH DMRSPDCCH_DMRS_beta		dB					
EPRE ratio of PBCH DMRS to SSSPBCH_beta		dB	0				
EPRE ratio of PBCH to PBCH DMRSPSS_beta		dB					
EPRE ratio of PSS to SSSSSS_beta		dB					
EPRE ratio of PDSCH DMRS to SSS PDSCH_beta		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1,4	dB	1	-7	-15	-4.5	1
	Config 2		1	-7	-15	-4.5	1
	Config 3		1	-7	-15	-4.5	1
N_{oc}	Config 1,4	dBm/15kHz	-98				
	Config 2		-98				
	Config 3		-98				
Propagation condition			TDL-C 300ns 100Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure A.16.5.1.12.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band.

Table A.16.5.1.12.1-4: Void

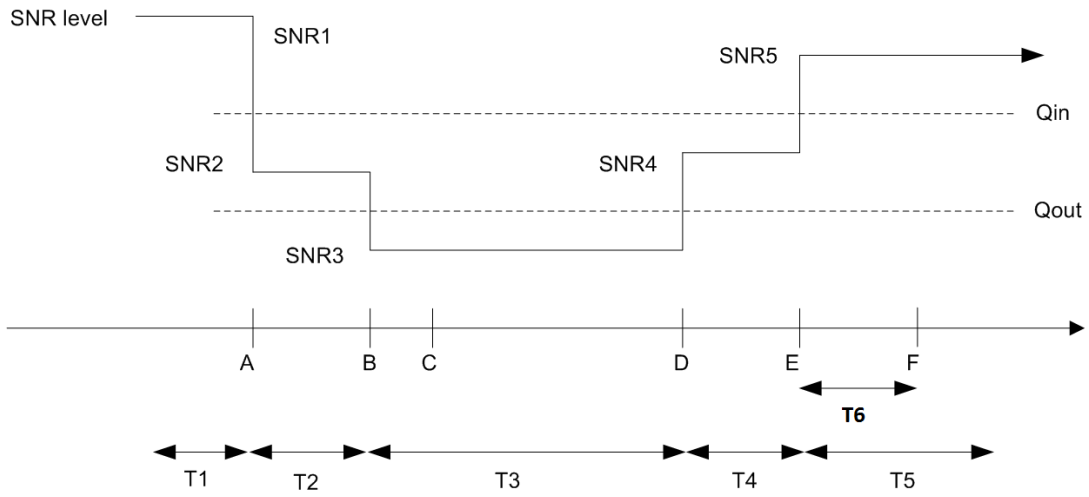

Figure A.16.5.1.12.1-1: SNR variation for CSI-RS in-sync testing

A.16.5.1.12.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (T6 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.16.5.1.13 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in DRX mode for 1 Rx UE

A.16.5.1.13.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when DRX is used. This test will partly verify the FR1 PCell CSI-RS Out-of-sync radio link monitoring requirements in clause 8.1B.3.

The test parameters are given in Tables A.16.5.1.13.1-1, A.16.5.1.13.1-2, and A.16.5.1.13.1-3 below. There is one cell, cell 1 is the PCell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.16.5.1.13.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test. In the test, SSB0 is configured as the BFD-RS.

Table A.16.5.1.13.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30 kHz SSB SCS, 40 MHz bandwidth
4	HD-FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.16.5.1.13.1-2: General test parameters for FR1 PCell for CSI-RS out-of-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
	Config 4		HD-FDD
TDD Configuration	Config 1, 4		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
DL initial BWP configuration	Config 1, 2, 3, 4		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1, 4		CCR.1.3 FDD
	Config 2		CCR.1.3 TDD
	Config 3		CCR.2.2 TDD
SSB Configuration	Config 1, 4		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.1 RedCap FR1
SMTC Configuration	Config 1, 2, 4		SMTC.1
	Config 3		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4		15 kHz
	Config 3		30 kHz
TRS configuration	Config 1, 4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
CSI-RS for RLM	Config 1, 4		Resource #4 in TRS.1.1 FDD
	Config 2		Resource #4 in TRS.1.1 TDD
	Config 3		Resource #4 in TRS.1.2 TDD
TCI configuration for PDCCH/PDSCH			TCI.State. 2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x1 Low

Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	16
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			DRX.3
Gap pattern ID			N.A.
Layer 3 filtering			Enabled
T310 timer		ms	0
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
T1		s	0.2
T2		s	2.24
T3		s	2.28
D1		s	2.24
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.16.5.1.13.1-3: Cell specific test parameters for FR1 for CSI-RS out-of-sync radio link monitoring in DRX mode

Parameter		Unit	Test 1		
			T1	T2	T3
EPRE ratio of PDCCH DMRS to SSSPDCCH_beta		dB	4		
EPRE ratio of PDCCH to PDCCH DMRSPDCCH_DMRS_beta		dB	4		
EPRE ratio of PBCH DMRS to SSSPBCH_beta		dB	0		
EPRE ratio of PBCH to PBCH DMRSPSS_beta		dB			
EPRE ratio of PSS to SSSSSS_beta		dB			
EPRE ratio of PDSCH DMRS to SSS PDSCH_beta		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1,4	dB	1	-7	-15
	Config 2		1	-7	-15
	Config 3		1	-7	-15
N_{oc}	Config 1,4	dBm/15kHz	-98		

	Config 2		-98
	Config 3		-98
Propagation condition			TDL-C 300ns 100Hz

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.16.5.1.13.1-1.

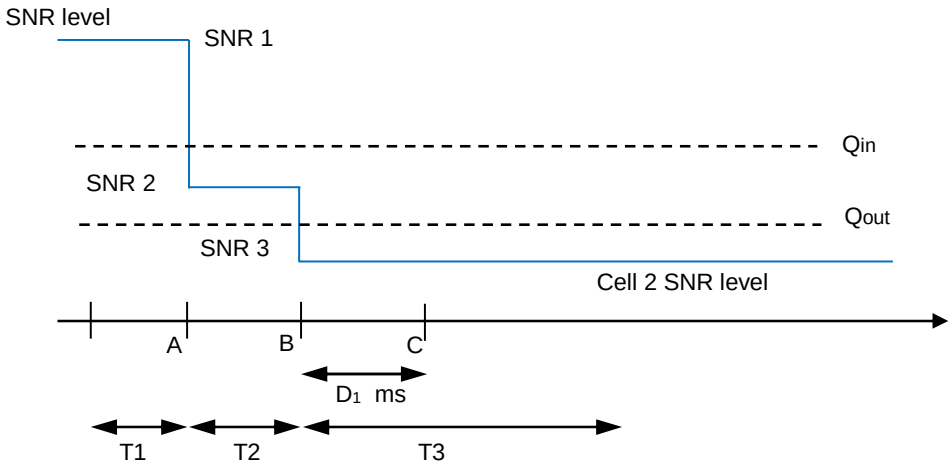

Figure A.16.5.1.13.1-1: SNR variation for CSI-RS out-of-sync testing

A.16.5.1.13.2 Test Requirements

The UE behaviour during time durations T1, T2, and T3 shall be as follows:

During time durations T1, T2 and T3, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on PCell.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 (PCell) at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

The UE shall stop transmitting uplink signal in Cell 1 (PCell) no later than time point C (D_1 ms after the start of the time duration T3) on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.16.5.1.14 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in DRX mode for 2 Rx UE

A.16.5.1.14.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when DRX is used. This test will partly verify the FR1 PCell CSI-RS Out-of-sync radio link monitoring requirements in clause 8.1.

The test parameters are given in Tables A.16.5.1.14.1-1, A.16.5.1.14.1-2, and A.16.5.1.14.1-3 below. There is one cell, cell 1 is the PCell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.16.5.1.14.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test. In the test, SSB0 is configured as the BFD-RS.

Table A.16.5.1.14.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30 kHz SSB SCS, 40 MHz bandwidth
4	HD-FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.16.5.1.14.1-2: General test parameters for FR1 PCell for CSI-RS out-of-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
	Config 4		HD-FDD
TDD Configuration	Config 1, 4		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
DL initial BWP configuration	Config 1, 2, 3, 4		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1, 4		CCR.1.3 FDD
	Config 2		CCR.1.3 TDD
	Config 3		CCR.2.2 TDD
SSB Configuration	Config 1, 4		SSB.1 FR1

	Config 2		SSB.1 FR1
	Config 3		SSB.1 RedCap FR1
SMTC Configuration	Config 1, 2, 4		SMTC.1
	Config 3		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4		15 kHz
	Config 3		30 kHz
TRS configuration	Config 1, 4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
CSI-RS for RLM	Config 1, 4		Resource #4 in TRS.1.1 FDD
	Config 2		Resource #4 in TRS.1.1 TDD
	Config 3		Resource #4 in TRS.1.2 TDD
TCI configuration for PDCCH/PDSCH			TCI.State. 2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			DRX.3
Gap pattern ID			N.A.
Layer 3 filtering			Enabled
T310 timer		ms	0
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
T1		s	0.2
T2		s	1.28
T3		s	1.28
D1		s	1.24
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.16.5.1.14.1-3: Cell specific test parameters for FR1 for CSI-RS out-of-sync radio link monitoring in DRX mode

Parameter	Unit	Test 1		
		T1	T2	T3
EPRE ratio of PDCCH DMRS to SSSPDCCH_beta	dB	4		
EPRE ratio of PDCCH to PDCCH DMRSPDCCH_DMRS_beta	dB	4		
EPRE ratio of PBCH DMRS to SSSPBCH_beta	dB	0		

EPRE ratio of PBCH to PBCH DMRSPSS_beta		dB			
EPRE ratio of PSS to SSSSSS_beta		dB			
EPRE ratio of PDSCH DMRS to SSS PDSCH_beta		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1,4	dB	1	-7	-15
	Config 2		1	-7	-15
	Config 3		1	-7	-15
N_{oc}	Config 1,4	dBm/15kHz	-98		
	Config 2		-98		
	Config 3		-98		
Propagation condition			TDL-C 300ns 100Hz		

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.16.5.1.14.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band.

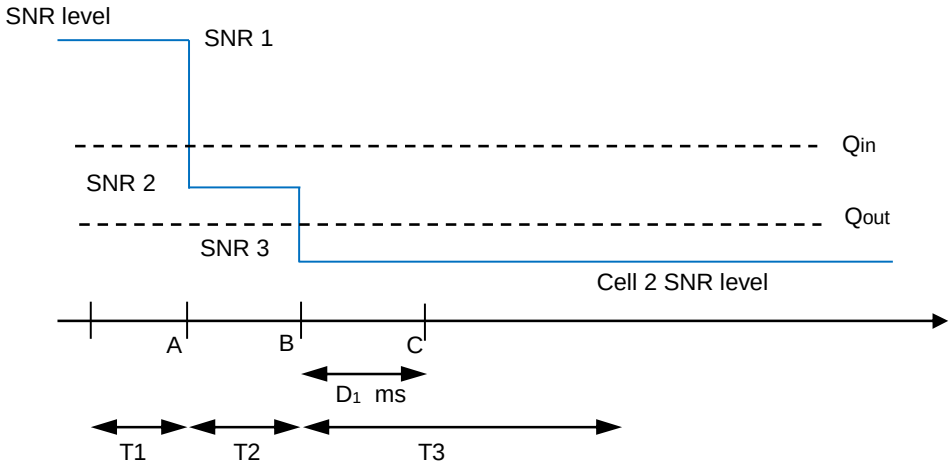

Figure A.16.5.1.14.1-1: SNR variation for CSI-RS out-of-sync testing

A.16.5.1.14.2 Test Requirements

The UE behaviour during time durations T1, T2, and T3 shall be as follows:

During time durations T1, T2 and T3, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on PCell.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 (PCell) at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

The UE shall stop transmitting uplink signal in Cell 1 (PCell) no later than time point C (D_1 ms after the start of the time duration T3) on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.16.5.1.15 Radio Link Monitoring In-sync Test for FR1 PCell configured with CSI-RS-based RLM in DRX mode for 1 Rx UE

A.16.5.1.15.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when DRX is used. This test will partly verify the FR1 PCell CSI-RS In-sync radio link monitoring requirements in clause 8.1B.3.

The test parameters are given in Tables A.16.5.1.15.1-1, A.16.5.1.151-2, A.16.5.1.15.1-3 and A.16.5.1.15.1-3A below. There is one cells, cell 1which is the PCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.16.5.1.15.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test. In the test, SSB0 is configured as the BFD-RS.

Table A.16.5.1.15.1-1: Supported test configurations for FR1 PSCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30kHz SSB SCS, 40 MHz bandwidth
4	HD-FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.16.5.1.15.1-2: General test parameters for FR1 PCell for CSI-RS in-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
	Config 4		HD-FDD
TDD Configuration	Config 1, 4		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
DL initial BWP configuration	Config 1, 2, 3, 4		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4		ULBWP.0.1

UL dedicated BWP configuration	Config 1, 2, 3, 4		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1, 4		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
SSB Configuration	Config 1, 4		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.1 RedCap FR1
SMTC Configuration	Config 1, 2		SMTC.1
	Config 3		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4		15 kHz
	Config 3		30 kHz
TRS configuration	Config 1, 4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
CSI-RS for RLM	Config 1, 4		Resource #4 in TRS.1.1 FDD
	Config 2		Resource #4 in TRS.1.1 TDD
	Config 3		Resource #4 in TRS.1.2 TDD
TCI configuration for PDCCH/PDSCH			TCI.State. 2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x1 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	16
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			DRX.3

Gap pattern ID			gp0
Layer 3 filtering			Enabled
T310 timer		ms	4000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
T1		s	0.2
T2		s	0.2
T3		s	2.28
T4		s	0.2
T5		s	1.2
T6		s	1
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.16.5.1.15.1-3: Cell specific test parameters for FR1 for CSI-RS in-sync radio link monitoring in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSSPDCCH_beta		dB	4				
EPRE ratio of PDCCH to PDCCH DMRSPDCCH_DMRS_beta		dB					
EPRE ratio of PBCH DMRS to SSSPBCH_beta		dB	0				
EPRE ratio of PBCH to PBCH DMRSPSS_beta		dB					
EPRE ratio of PSS to SSSSSS_beta		dB					
EPRE ratio of PDSCH DMRS to SSS PDSCH_beta		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1,4	dB	1	-7	-15	-4.5	1
	Config 2		1	-7	-15	-4.5	1
	Config 3		1	-7	-15	-4.5	1
N_{oc}	Config 1,4	dBm/15kHz	-98				
	Config 2		-98				
	Config 3		-98				
Propagation condition			TDL-C 300ns 100Hz				

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure A.16.5.1.15.1-1.

Table A.16.5.1.15.1-3A: Measurement gap configuration for FR1 CSI-RS in-sync radio link monitoring in non-DRX mode

Field	Test 1
	Value
gapOffset	0
Note 1: Void	

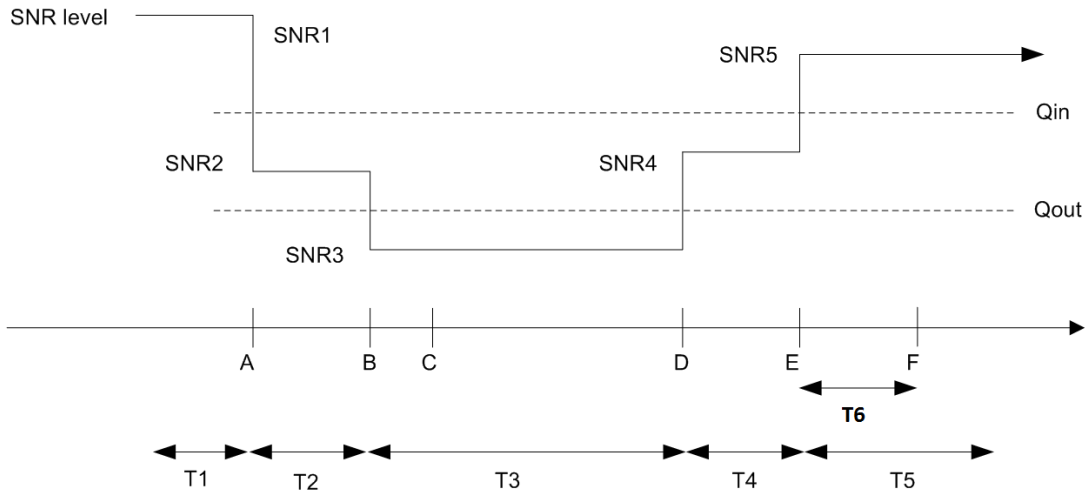

Figure A.16.5.1.15.1-1: SNR variation for CSI-RS in-sync testing

A.16.5.1.15.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (T6 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.16.5.1.16 Radio Link Monitoring In-sync Test for FR1 PCell configured with CSI-RS-based RLM in DRX mode for 2 Rx UE

A.16.5.1.16.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when DRX is used. This test will partly verify the FR1 PCell CSI-RS In-sync radio link monitoring requirements in clause 8.1B.3.

The test parameters are given in Tables A.16.5.1.15.1-1, A.16.5.1.151-2, A.16.5.1.15.1-3 and A.16.5.1.15.1-3A below. There is one cells, cell 1which is the PCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.16.5.1.15.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test. In the test, SSB0 is configured as the BFD-RS.

Table A.16.5.1.16.1-1: Supported test configurations for FR1 PSCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30kHz SSB SCS, 40 MHz bandwidth
4	HD-FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.16.5.1.16.1-2: General test parameters for FR1 PCell for CSI-RS in-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
	Config 4		HD-FDD
TDD Configuration	Config 1, 4		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
DL initial BWP configuration	Config 1, 2, 3, 4		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1, 4		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
SSB Configuration	Config 1, 4		SSB.1 FR1
	Config 2		SSB.1 FR1

	Config 3		SSB.2 FR1
SMTC Configuration	Config 1, 2		SMTC.1
	Config 3		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4		15 kHz
	Config 3		30 kHz
TRS configuration	Config 1, 4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
CSI-RS for RLM	Config 1, 4		Resource #4 in TRS.1.1 FDD
	Config 2		Resource #4 in TRS.1.1 TDD
	Config 3		Resource #4 in TRS.1.2 TDD
TCI configuration for PDCCH/PDSCH			TCI.State. 2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			DRX.3
Gap pattern ID			gp0
Layer 3 filtering			Enabled
T310 timer		ms	3000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
T1		s	0.2
T2		s	0.2
T3		s	1.24

T4	s	0.2
T5	s	1.88
T6	s	1
Note 1: UE-specific PDCCH is not transmitted after T1 starts.		

Table A.16.5.1.16.1-3: Cell specific test parameters for FR1 for CSI-RS in-sync radio link monitoring in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSSPDCCH_beta		dB	4				
EPRE ratio of PDCCH to PDCCH DMRSPDCCH_DMRS_beta		dB					
EPRE ratio of PBCH DMRS to SSSPBCH_beta		dB	0				
EPRE ratio of PBCH to PBCH DMRSPSS_beta		dB					
EPRE ratio of PSS to SSSSSS_beta		dB					
EPRE ratio of PDSCH DMRS to SSS PDSCH_beta		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1,4	dB	1	-7	-15	-4.5	1
	Config 2		1	-7	-15	-4.5	1
	Config 3		1	-7	-15	-4.5	1
N_{oc}	Config 1,4	dBm/15kHz	-98				
	Config 2		-98				
	Config 3		-98				
Propagation condition			TDL-C 300ns 100Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure A.16.5.1.15.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band.

Table A.16.5.1.16.1-3A: Measurement gap configuration for FR1 CSI-RS in-sync radio link monitoring in non-DRX mode

Field	Test 1
	Value
gapOffset	0
Note 1: Void	

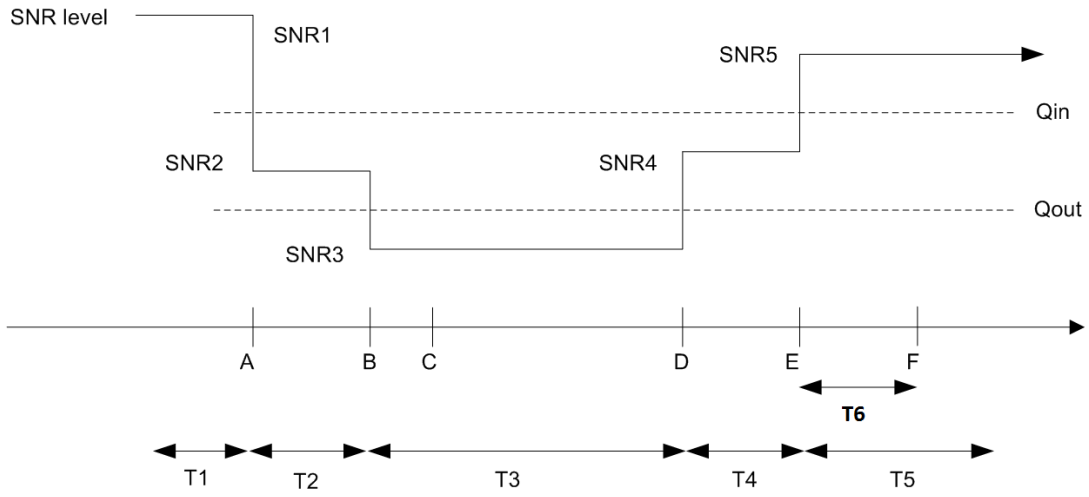

Figure A.16.5.1.15.1-1: SNR variation for CSI-RS in-sync testing

A.16.5.1.16.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (T6 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.16.5.2 Beam Failure Detection and Link recovery procedures

A.16.5.2.1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in non-DRX mode for 1 Rx UE

A.16.5.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5B.

The test parameters are given in Tables A.16.5.2.1.1-1, A.16.5.2.1.1-2, A.16.5.2.1.1-3 and A.16.5.2.1.1-4 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.16.5.2.1.1-1 shows the variation of the downlink SNR of the SSB in set q_0 in the active cell to emulate SSB based beam failure. Figure A.16.5.2.1.1-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 2 ms. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test 1.

Table A.16.5.2.1.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30 kHz SSB SCS, 20 MHz bandwidth
4	HD-FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.16.5.2.1.1-2: General test parameters for FR1 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Value	Comment
			Test 1	
Active PCell			Cell 1	
RF Channel Number			1	
Duplex mode	Config 1		FDD	
	Config 2, 3		TDD	
	Config 4		HD-FDD	
BWchannel	Config 1,4	MHz	10: NRB,c = 52	
	Config 2		10: NRB,c = 52	
	Config 3		20: NRB,c = 51	
DL initial BWP configuration	Config 1, 2, 3, 4		DLBWP.0.1	
DL dedicated BWP configuration	Config 1, 2, 3,4		DLBWP.1.1	
UL initial BWP configuration	Config 1, 2, 3,4		ULBWP.0.1	
UL dedicated BWP configuration	Config 1, 2, 3,4		ULBWP.1.1	
TDD Configuration	Config 1,4		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
CORESET Reference Channel	Config 1,4		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
SSB Configuration	Config 1,4		SSB.3 FR1	
	Config 2		SSB.3 FR1	
	Config 3		SSB.2 RedCap FR1	
SMTC Configuration	Config 1, 2.4		SMTC.1 RedCap	
	Config 3		SMTC.1 RedCap	
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 KHz	
	Config 3		30 KHz	
PRACH Configuration	Config 1, 2		Table A.3.8.2.2-1	
	Config 3		Table A.3.8.2.2-1	
SSB Index assigned as BFD RS (q_0)			0	
SSB Index assigned as CBD RS (q_1)			1	
OCNG parameters			OP.1	
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x1 Low	

Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	16	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			OFF	
Gap pattern ID			gp0	
gapOffset			0	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1, 2,4	dBm/ SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3		-95	
beamFailureInstanceMaxCount			n1	see clause 5.17 of TS 38.321 [7]
beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [7]
CSI-RS configuration for CSI reporting	Config 1,4		CSI-RS.1.1 FDD	
	Config 2		CSI-RS.1.1 TDD	
	Config 3		CSI-RS.2.1 TDD	
CSI-RS for tracking	Config 1,4		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
SSB Index assigned as RLM RS			0, 1	
T310 Timer	ms		1000	
N310			2	
T1		s	0.2	During this time the the

			UE shall be fully synchronized to cell 1
T2	s	0.37	
T3	s	0.24	
T4	s	0	
T5	s	0.17	
D1	s	0.13	
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.16.5.2.1.1-3: Cell specific test parameters for FR1 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q_0	Config 1,4	dB	5	-3	-12	-12	-12
	Config 2		5	-3	-12	-12	-12
	Config 3		5	-3	-12	-12	-12
SNR_SSB of set q_1	Config 1,4	dB	-10	-10	10	10	10
	Config 2		-10	-10	10	10	10
	Config 3		-10	-10	10	10	10
SSB_RP of set q_1	Config 1,4	dBm/SCS kHz	-108	-108	-88	-88	-88
	Config 2		-108	-108	-88	-88	-88
	Config 3		-105	-105	-85	-85	-85
N_{oc}	Config 1,4	dBm/15 KHz	-98				
	Config 2		-98				
	Config 3		-98				
Propagation condition			TDL-C 300ns 100Hz				
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1. Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1. Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1. Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1. Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG. Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs. Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1. Note 9: Void.								

Table A.16.5.2.1.1-4: Void

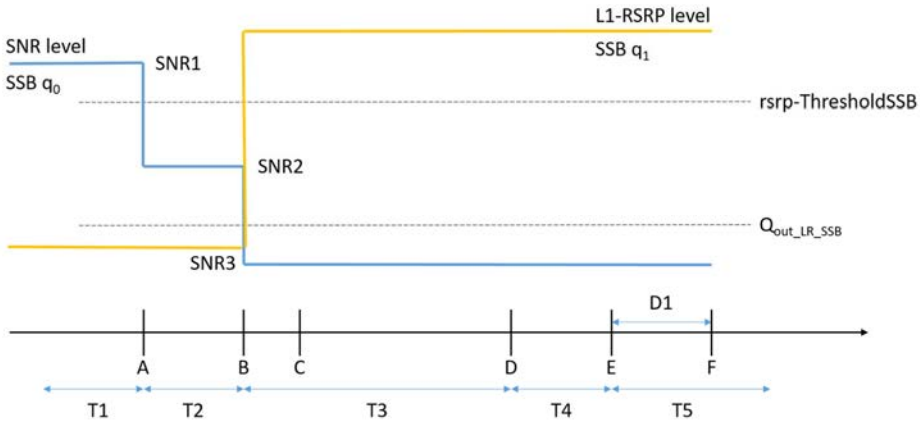

Figure A.16.5.2.1.1-1: SNR and L1-RSRP variation SSB for SSB-based beam failure detection and link recovery testing in non-DRX mode

A.16.5.2.1.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 240+10 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.16.5.2.2 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in non-DRX mode for 2 Rx UE

A.16.5.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5B.

The test parameters are given in Tables A.16.5.2.2.1-1, A.16.5.2.2.1-2, A.16.5.2.2.1-3 and A.16.5.2.2.1-4 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.16.5.2.2.1-1 shows the variation of the downlink SNR

of the SSB in set q_0 in the active cell to emulate SSB based beam failure. Figure A.16.5.2.2.1-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 2 ms. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test 1.

Table A.16.5.2.2.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30 kHz SSB SCS, 20 MHz bandwidth
4	HD-FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.16.5.2.2.1-2: General test parameters for FR1 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Value	Comment
			Test 1	
Active PSCell			Cell 1	
RF Channel Number			1	
Duplex mode	Config 1		FDD	
	Config 2, 3		TDD	
	Config 4		HD-FDD	
BWchannel	Config 1,4	MHz	10: NRB,c = 52	
	Config 2		10: NRB,c = 52	
	Config 3		20: NRB,c = 51	
DL initial BWP configuration	Config 1, 2, 3,4		DLBWP.0.1	
DL dedicated BWP configuration	Config 1, 2, 3,4		DLBWP.1.1	
UL initial BWP configuration	Config 1, 2, 3,4		ULBWP.0.1	
UL dedicated BWP configuration	Config 1, 2, 3,4		ULBWP.1.1	
TDD Configuration	Config 1,4		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
CORESET Reference Channel	Config 1,4		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
SSB Configuration	Config 1,4		SSB.3 FR1	
	Config 2		SSB.3 FR1	
	Config 3		SSB.1 RedCap FR1	
SMTC Configuration	Config 1, 2,4		SMTC.1 RedCap	
	Config 3		SMTC.1 RedCap	
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 KHz	
	Config 3		30 KHz	
PRACH Configuration	Config 1, 2,4		Table A.3.8.2.2-1	
	Config 3		Table A.3.8.2.2-1	
SSB Index assigned as BFD RS (q_0)			0	

SSB Index assigned as CBD RS (q_1)			1	
OCNG parameters			OP.1	
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			OFF	
Gap pattern ID			gp0	
gapOffset			0	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1, 2,4	dBm/ SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3		-95	
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see clause 5.17 of TS 38.321 [7]
beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [7]
CSI-RS configuration for CSI reporting	Config 1,4		CSI-RS.1.1 FDD	
	Config 2		CSI-RS.1.1 TDD	
	Config 3		CSI-RS.2.1 TDD	
CSI-RS for tracking	Config 1,4		TRS.1.1 FDD	

	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
SSB Index assigned as RLM RS		0, 1		
T310 Timer	ms	1000		
N310		2		
T1		s	0.2	During this time the the UE shall be fully synchronized to cell 1
T2		s	0.37	
T3		s	0.24	
T4		s	0	
T5		s	0.17	
D1		s	0.13	
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.16.5.2.2.1-3: Cell specific test parameters for FR1 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q_0	Config 1,4	dB	5	-3	-12	-12	-12
	Config 2		5	-3	-12	-12	-12
	Config 3		5	-3	-12	-12	-12
SNR_SSB of set q_1	Config 1,4	dB	-10	-10	10	10	10
	Config 2		-10	-10	10	10	10
	Config 3		-10	-10	10	10	10
SSB_RP of set q_1	Config 1,4	dBm/SCS kHz	-108	-108	-88	-88	-88
	Config 2		-108	-108	-88	-88	-88
	Config 3		-105	-105	-85	-85	-85
N_{oc}	Config 1,4	dBm/15 KHz	-98				
	Config 2		-98				
	Config 3		-98				
Propagation condition			TDL-C 300ns 100Hz				

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.

Table A.16.5.2.2.1-4: Void

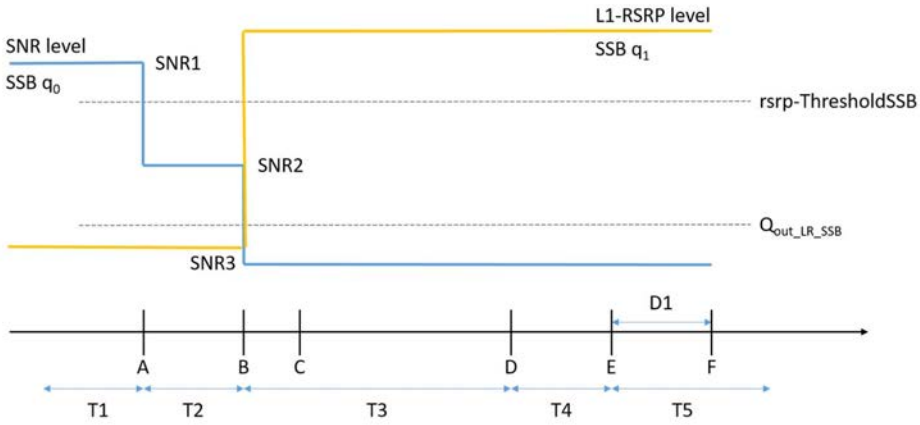

Figure A.16.5.2.2.1-1: SNR and L1-RSRP variation SSB for SSB-based beam failure detection and link recovery testing in non-DRX mode

A.16.5.2.2.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 120+10 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.16.5.2.3 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in DRX mode for 1 Rx UE

A.16.5.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5B.2.

The test parameters are given in Tables A.16.5.2.3.1-1, A.16.5.2.3.1-2, A.16.5.2.3.1-3, A.16.5.2.3.1-4 and A.16.5.2.3.1-5 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.16.5.2.3.1-1 shows the variation of the downlink SNR of the SSB in set q_0 in the active cell to emulate SSB based beam failure. Figure A.16.5.2.3.1-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

Table A.16.5.2.3.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30 kHz SSB SCS, 20 MHz bandwidth
4	HD-FDD duplex mode, 15kHz SSB SCS, 10 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.16.5.2.3.1-2: General test parameters for FR1 PCell for SSB-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Value	Comment
			Test 1	
Active PSCell			Cell 1	
RF Channel Number			1	
Duplex mode	Config 1		FDD	
	Config 2, 3		TDD	
	Config 4		HD-FDD	
BWchannel	Config 1	MHz	10: NRB,c = 52	
	Config 2		10: NRB,c = 52	
	Config 3		20: NRB,c = 51	
	Config 4		10: NRB,c = 52	
DL initial BWP configuration	Config 1, 2, 3, 4		DLBWP.0.1	
DL dedicated BWP configuration	Config 1, 2, 3, 4		DLBWP.1.1 RedCap	
UL initial BWP configuration	Config 1, 2, 3, 4		ULBWP.0.1	
UL dedicated BWP configuration	Config 1, 2, 3, 4		ULBWP.1.1 RedCap	
TDD Configuration	Config 1		Not Applicable	
	Config 2		TDDConf.1.1	

	Config 3		TDDConf.2.1	
	Config 4		Not Applicable	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
	Config 4		CR.1.1 FDD	
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD	
	Config 2		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD	
	Config 4		CCR.1.1 FDD	
SSB Configuration	Config 1		SSB.3 FR1	
	Config 2		SSB.3 FR1	
	Config 3		SSB.2 RedCap FR1	
	Config 4		SSB.3 FR1	
SMTC Configuration	Config 1, 2		SMTC.1	
	Config 3		SMTC.1	
	Config 4		SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 KHz	
	Config 3		30 KHz	
	Config 4		15 KHz	
PRACH Configuration	Config 1, 2		Table A.3.8.2.2-1	
	Config 3		Table A.3.8.2.2-1	
	Config 4		Table A.3.8.2.2-1	
SSB Index assigned as BFD RS (q_0)			0	
SSB Index assigned as CBD RS (q_1)			1	
OCNG parameters			OP.1	
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x1 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	

DRX			DRX.7	A.3.3.7
Gap pattern ID			N.A.	
rlmInSyncOutOfSyncThreshold			Absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1, 2	dBm/ SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3		-95	
	Config 4		-98	
beamFailureInstanceMaxCount			n1	see clause 5.17 of TS 38.321 [7]
beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [7]
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD	
	Config 2		CSI-RS.1.1 TDD	
	Config 3		CSI-RS.2.1 TDD	
	Config 4		CSI-RS.1.1 FDD	
CSI-RS for tracking	Config 1		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
	Config 4		TRS.1.1 FDD	
SSB Index assigned as RLM RS			0, 1	
T310 Timer		ms	1000	
N310			2	
T1		s	1	During this time the the UE shall be fully synchronized to cell 1
T2		s	5.17	
T3		s	[5.84]	
T4		s	0	
T5		s	1.97	
D1		s	1.93	
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.16.5.2.3.1-3: Cell specific test parameters for FR1 PCell for SSB-based beam failure detection and link recovery testing in DRX mode

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5

EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q_0	Config 1	dB	5	-3	-12	-12	-12
	Config 2		5	-3	-12	-12	-12
	Config 3		5	-3	-12	-12	-12
	Config 4		5	-3	-12	-12	-12
SNR_SSB of set q_1	Config 1	dB	-10	-10	10	10	10
	Config 2		-10	-10	10	10	10
	Config 3		-10	-10	10	10	10
	Config 4		-10	-10	10	10	10
SSB_RP of set q_1	Config 1	dBm/SCS kHz	-108	-108	-88	-88	-88
	Config 2		-108	-108	-88	-88	-88
	Config 3		-105	-105	-85	-85	-85
	Config 4		-108	-108	-88	-88	-88
N_{oc}	Config 1	dBm/15 KHz	-98				
	Config 2		-98				
	Config 3		-98				
	Config 4		-98				
Propagation condition			TDL-C 300ns 100Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Void
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.

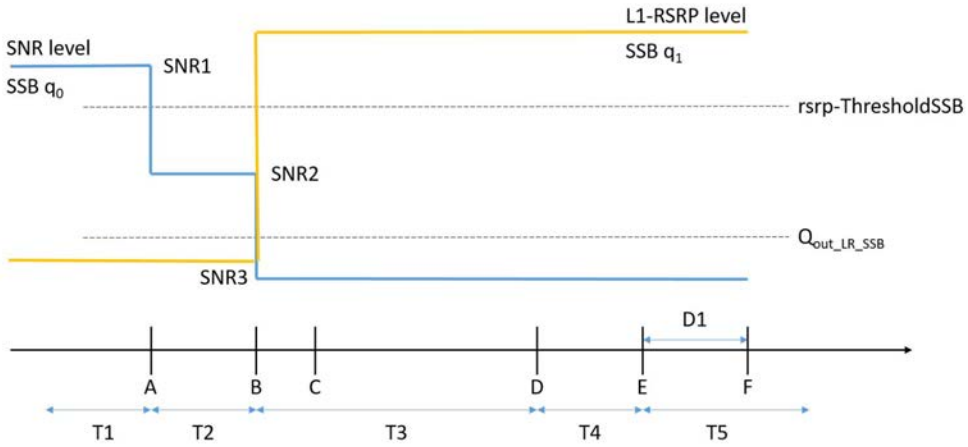

Figure A.16.5.2.2.1-1: SNR and L1-RSRP variation for SSB-based beam failure detection and link recovery testing in non-DRX mode

A.16.5.2.3.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 1920+10 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.16.5.2.4 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in DRX mode for 2 Rx UE

A.16.5.2.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5B.2.

The test parameters are given in Tables A.16.5.2.4.1-1, A.16.5.2.4.1-2, A.16.5.2.4.1-3, A.16.5.2.4.1-4 and A.16.5.2.4.1-5 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.16.5.2.4.1-1 shows the variation of the downlink SNR of the SSB in set q_0 in the active cell to emulate SSB based beam failure. Figure A.16.5.2.4.1-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.16.5.2.4.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30 kHz SSB SCS, 20 MHz bandwidth
4	HD-FDD duplex mode, 15kHz SSB SCS, 10 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.16.5.2.4.1-2: General test parameters for FR1 PCell for SSB-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Value	Comment
			Test 1	
Active PSCell			Cell 1	
RF Channel Number			1	
Duplex mode	Config 1		FDD	
	Config 2, 3		TDD	
	Config 4		HD-FDD	
BWchannel	Config 1	MHz	10: NRB,c = 52	
	Config 2		10: NRB,c = 52	
	Config 3		20: NRB,c = 51	
	Config 4		10: NRB,c = 52	
DL initial BWP configuration	Config 1, 2, 3, 4		DLBWP.0.1	
DL dedicated BWP configuration	Config 1, 2, 3, 4		DLBWP.1.1 RedCap	
UL initial BWP configuration	Config 1, 2, 3, 4		ULBWP.0.1	
UL dedicated BWP configuration	Config 1, 2, 3, 4		ULBWP.1.1 RedCap	
TDD Configuration	Config 1		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
	Config 4		Not Applicable	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
	Config 4		CR.1.1 FDD	
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD	
	Config 2		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD	
	Config 4		CCR.1.1 FDD	
SSB Configuration	Config 1		SSB.3 FR1	
	Config 2		SSB.3 FR1	
	Config 3		SSB.2 RedCap FR1	
	Config 4		SSB.3 FR1	
SMTC Configuration	Config 1, 2		SMTC.1	
	Config 3		SMTC.1	
	Config 4		SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 KHz	
	Config 3		30 KHz	
	Config 4		15 KHz	
PRACH Configuration	Config 1, 2		Table A.3.8.2.2-1	
	Config 3		Table A.3.8.2.2-1	
	Config 4		Table A.3.8.2.2-1	
SSB Index assigned as BFD RS (q_0)			0	
SSB Index assigned as CBD RS (q_1)			1	
OCNG parameters			OP.1	
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	

	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			DRX.7	A.3.3.7
Gap pattern ID			N.A.	
rlmInSyncOutOfSyncThreshold			Absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1, 2	dBm/ SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3		-95	
	Config 4		-98	
beamFailureInstanceMaxCount			n1	see clause 5.17 of TS 38.321 [7]
beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [7]
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD	
	Config 2		CSI-RS.1.1 TDD	
	Config 3		CSI-RS.2.1 TDD	
	Config 4		CSI-RS.1.1 FDD	
CSI-RS for tracking	Config 1		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
	Config 4		TRS.1.1 FDD	
SSB Index assigned as RLM RS			0, 1	
T310 Timer		ms	1000	
N310			2	
T1		s	1	During this time the the UE shall be fully

			synchronized to cell 1
T2	s	5.17	
T3	s	3.24	
T4	s	0	
T5	s	1.97	
D1	s	1.93	
Note 1: All configurations are assigned to the UE prior to the start of time period T1.			
Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.16.5.2.4.1-3: Cell specific test parameters for FR1 PCell for SSB-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q_0	Config 1	dB	5	-3	-12	-12	-12
	Config 2		5	-3	-12	-12	-12
	Config 3		5	-3	-12	-12	-12
	Config 4		5	-3	-12	-12	-12
SNR_SSB of set q_1	Config 1	dB	-10	-10	10	10	10
	Config 2		-10	-10	10	10	10
	Config 3		-10	-10	10	10	10
	Config 4		-10	-10	10	10	10
SSB_RP of set q_1	Config 1	dBm/SCS kHz	-108	-108	-88	-88	-88
	Config 2		-108	-108	-88	-88	-88
	Config 3		-105	-105	-85	-85	-85
	Config 4		-108	-108	-88	-88	-88
N_{oc}	Config 1	dBm/15 KHz	-98				
	Config 2		-98				
	Config 3		-98				
	Config 4		-98				
Propagation condition			TDL-C 300ns 100Hz				
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.							
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.							
Note 4: Void							
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.							
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.							
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.							
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.							
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band.							

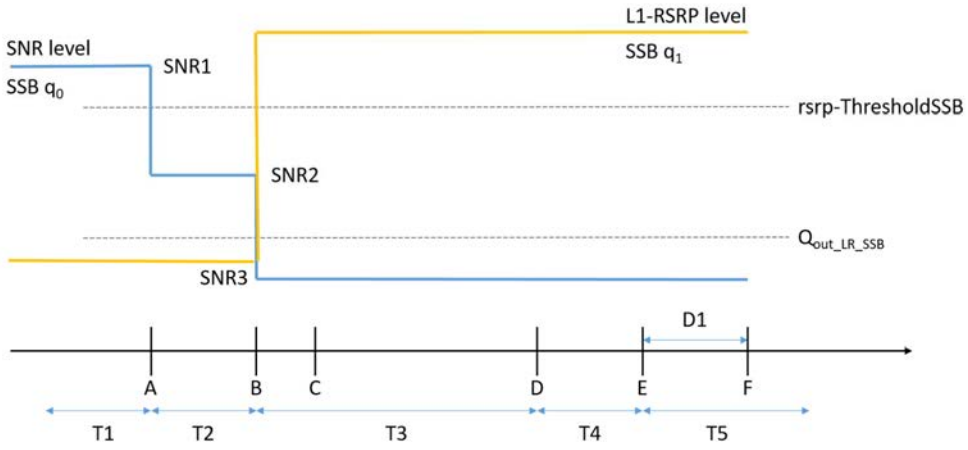

Figure A.16.5.2.4.1-1: SNR and L1-RSRP variation for SSB-based beam failure detection and link recovery testing in non-DRX mode

A.16.5.2.4.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 1920+10 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.16.5.2.5 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with CSI-RS-based BFD and LR in non-DRX mode for 1 Rx UE

A.16.5.2.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct CSI-RS-based link recovery based on beam candicate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5B.3.

The test parameters are given in Tables A.16.5.2.5.1-1, A.16.5.2.5.1-2, and below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.16.5.2.5.1-1 shows the variation of the downlink SNR of the CSI-RS in set q_0 in the active

cell to emulate CSI-RS based beam failure. Figure A.16.5.2.5.1-1 additionally shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled.

Table A.16.5.2.5.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30 kHz SSB SCS, 20 MHz bandwidth
4	HD-FDD duplex mode, 15kHz SSB SCS, 10 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.16.5.2.5.1-2: General test parameters for FR1 PCell for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Value	Comment
			Test 1	
Active PCell			Cell 1	
RF Channel Number			1	
Duplex mode	Config 1		FDD	
	Config 2, 3		TDD	
	Config 4		HD-FDD	
TDD Configuration	Config 1		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
	Config 4		Not Applicable	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	A.3.1.2
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
	Config 4		CR.1.1 FDD	
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD	A.3.1.3
	Config 2		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD	
	Config 4		CCR.1.1 FDD	
SSB Configuration	Config 1		SSB. 3 FR1	A.3.10
	Config 2		SSB. 3 FR1	
	Config 3		SSB.2 RedCap FR1	
	Config 4		SSB.3 FR1	
SMTC Configuration	Config 1, 2		SMTC.1	A.3.11
	Config 3		SMTC.1	
	Config 4		SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 KHz	
	Config 3		30 KHz	
PRACH Configuration	Config 1, 2, 4		FR1 PRACH configuration 4	A.3.8.2
	Config 3		FR1 PRACH configuration 4	A.3.8.2
csi-RS-Index assigned as beam failure detection RS in set q_0			0	
OCNG parameters			OP.1	A.3.2.1
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x1 Low	

Beam failure detection transmission parameters	DCI format			1-0	
	Number of Control OFDM symbols			2	
	Aggregation level		CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy		dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy		dB	0	
	DMRS precoder granularity			REG bundle size	
	REG bundle size			6	
DRX				OFF	
Gap pattern ID				N.A.	
csi-RS-Index assigned as candidate beam detection RS in set q_1				1	N
rlmInSyncOutOfSyncThreshold				absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1, 2		dBm/SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3			-95	
	Config 4			-98	
powerControlOffsetSS				db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount				n1	see clause 5.17 of TS 38.321 [7]
beamFailureDetectionTimer				pbfd4	see clause 5.17 of TS 38.321 [7]
CSI-RS configuration for q_0 and q_1		Config 1		CSI-RS.1.2 FDD	A.3.14
		Config 2		CSI-RS.1.2 TDD	
		Config 3		CSI-RS.2.2 TDD	
		Config 4		CSI-RS.1.2 FDD	
CSI-RS configuration for CSI reporting		Config 1		CSI-RS.1.1 FDD	A.3.14
		Config 2		CSI-RS.1.1 TDD	
		Config 3		CSI-RS.2.1 TDD	
		Config 4		CSI-RS.1.1 FDD	
TRS configuration		Config 1		TRS.1.1 FDD	
		Config 2		TRS.1.1 TDD	
		Config 3		TRS.1.2 TDD	
		Config 4		TRS.1.1 FDD	
CSI-RS-Index assigned as RLM RS		Config 1		CSI-RS.1.2 FDD	A.3.14
		Config 2		CSI-RS.1.2 TDD	
		Config 3		CSI-RS.2.2 TDD	
		Config 4		CSI-RS.1.2 FDD	
T310 Timer			ms	1000	
N310				2	
T1			s	0.2	During this time the the UE shall be fully synchronized to cell 1
T2			s	0.18	
T3			s	0.27	

T4	s	0	
T5	s	0.08	
D1	s	0.04	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.16.5.2.5.1-3: Cell specific test parameters for FR1 PCell for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set q_0	Config 1	dB	5	-3	-12	-12	-12
	Config 2		5	-3	-12	-12	-12
	Config 3		5	-3	-12	-12	-12
	Config 4		5	-3	-12	-12	-12
SNR_CSI-RS of set q_1	Config 1	dB	-10	-10	10	10	10
	Config 2		-10	-10	10	10	10
	Config 3		-10	-10	10	10	10
	Config 4		-10	-10	10	10	10
CSI-RS_RP of set q_1	Config 1	dBm/SCS kHz	-108	-108	-88	-88	-88
	Config 2		-108	-108	-88	-88	-88
	Config 3		-105	-105	-85	-85	-85
	Config 4		-108	-108	-88	-88	-88
N_{oc}	Config 1	dBm/15 KHz	-98				
	Config 2		-98				
	Config 3		-98				
	Config 4		-98				
Propagation condition			TDL-C 300ns 100Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Void
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.

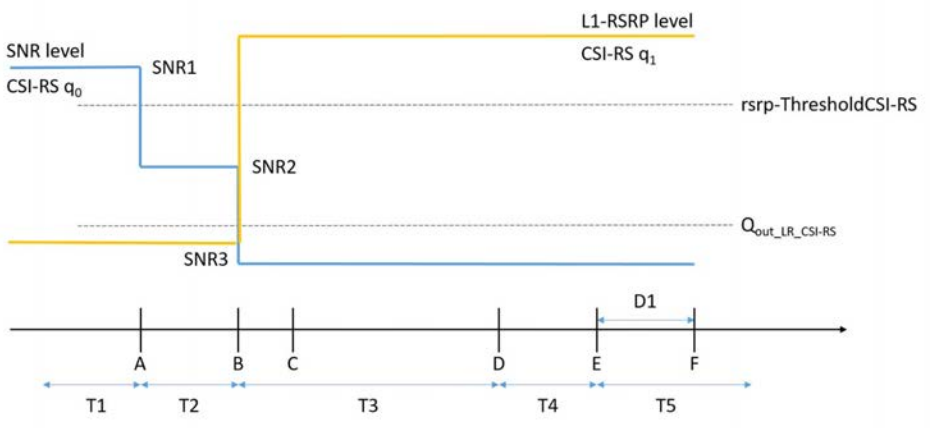

Figure A.16.5.2.5.1-1: SNR and L1-RSRP variation for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

A.16.5.2.5.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 30+10 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.16.5.2.6 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with CSI-RS-based BFD and LR in non-DRX mode for 2 Rx UE

A.16.5.2.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5B.3.

The test parameters are given in Tables A.16.5.2.6.1-1, A.16.5.2.6.1-2, and below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.16.5.2.6.1-1 shows the variation of the downlink SNR of the CSI-RS in set q_0 in the active cell to emulate CSI-RS based beam failure. Figure A.16.5.2.6.1-1 additionally shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration

T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled.

Table A.16.5.2.6.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30 kHz SSB SCS, 20 MHz bandwidth
4	HD-FDD duplex mode, 15kHz SSB SCS, 10 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.16.5.2.6.1-2: General test parameters for FR1 PCell for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Value	Comment
			Test 1	
Active PCell			Cell 1	
RF Channel Number			1	
Duplex mode	Config 1		FDD	
	Config 2, 3		TDD	
	Config 4		HD-FDD	
TDD Configuration	Config 1		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
	Config 4		Not Applicable	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	A.3.1.2
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
	Config 4		CR.1.1 FDD	
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD	A.3.1.3
	Config 2		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD	
	Config 4		CCR.1.1 FDD	
SSB Configuration	Config 1		SSB. 3 FR1	A.3.10
	Config 2		SSB. 3 FR1	
	Config 3		SSB.2 RedCap FR1	
	Config 4		SSB.3 FR1	
SMTC Configuration	Config 1, 2		SMTC.1	A.3.11
	Config 3		SMTC.1	
	Config 4		SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 KHz	
	Config 3		30 KHz	
PRACH Configuration	Config 1, 2, 4		FR1 PRACH configuration 4	A.3.8.2
	Config 3		FR1 PRACH configuration 4	A.3.8.2
csi-RS-Index assigned as beam failure detection RS in set q_0			0	
OCNG parameters			OP.1	A.3.2.1
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection	DCI format		1-0	

transmission parameters					
	Number of Control OFDM symbols			2	
	Aggregation level		CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy		dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy		dB	0	
	DMRS precoder granularity			REG bundle size	
	REG bundle size			6	
DRX				OFF	
Gap pattern ID				N.A.	
csi-RS-Index assigned as candidate beam detection RS in set q_1				1	N
rlmInSyncOutOfSyncThreshold				absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1, 2		dBm/SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3			-95	
	Config 4			-98	
powerControlOffsetSS				db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount				n1	see clause 5.17 of TS 38.321 [7]
beamFailureDetectionTimer				pbfd4	see clause 5.17 of TS 38.321 [7]
CSI-RS configuration for q_0 and q_1		Config 1		CSI-RS.1.2 FDD	A.3.14
		Config 2		CSI-RS.1.2 TDD	
		Config 3		CSI-RS.2.2 TDD	
		Config 4		CSI-RS.1.2 FDD	
CSI-RS configuration for CSI reporting		Config 1		CSI-RS.1.1 FDD	A.3.14
		Config 2		CSI-RS.1.1 TDD	
		Config 3		CSI-RS.2.1 TDD	
		Config 4		CSI-RS.1.1 FDD	
TRS configuration		Config 1		TRS.1.1 FDD	
		Config 2		TRS.1.1 TDD	
		Config 3		TRS.1.2 TDD	
		Config 4		TRS.1.1 FDD	
CSI-RS-Index assigned as RLM RS		Config 1		CSI-RS.1.2 FDD	A.3.14
		Config 2		CSI-RS.1.2 TDD	
		Config 3		CSI-RS.2.2 TDD	
		Config 4		CSI-RS.1.2 FDD	
T310 Timer			ms	1000	
N310				2	
T1			s	0.2	During this time the the UE shall be fully synchronized to cell 1
T2			s	0.18	
T3			s	0.14	
T4			s	0	
T5			s	0.08	

D1	s	0.04	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.16.5.2.6.1-3: Cell specific test parameters for FR1 PCell for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set q_0	Config 1	dB	5	-3	-12	-12	-12
	Config 2		5	-3	-12	-12	-12
	Config 3		5	-3	-12	-12	-12
	Config 4		5	-3	-12	-12	-12
SNR_CSI-RS of set q_1	Config 1	dB	-10	-10	10	10	10
	Config 2		-10	-10	10	10	10
	Config 3		-10	-10	10	10	10
	Config 4		-10	-10	10	10	10
CSI-RS_RP of set q_1	Config 1	dBm/SCS kHz	-108	-108	-88	-88	-88
	Config 2		-108	-108	-88	-88	-88
	Config 3		-105	-105	-85	-85	-85
	Config 4		-108	-108	-88	-88	-88
N_{oc}	Config 1	dBm/15 KHz	-98				
	Config 2		-98				
	Config 3		-98				
	Config 4		-98				
Propagation condition			TDL-C 300ns 100Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Void
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band.

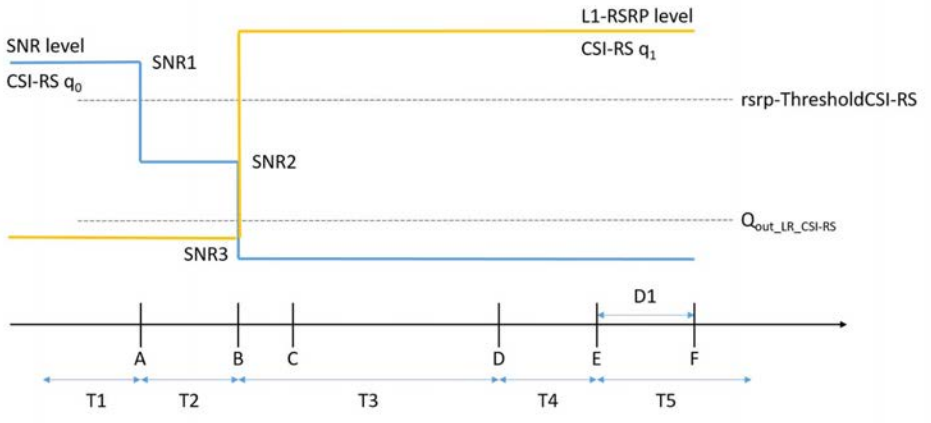

Figure A.16.5.2.6.1-1: SNR and L1-RSRP variation for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

A.16.5.2.6.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 30+10 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.16.5.2.7 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with CSI-RS-based BFD and LR in DRX mode for 1 Rx UE

A.16.5.2.7.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5B.3.

The test parameters are given in Tables A.16.5.2.7.1-1, A.16.5.2.7.1-2, A.16.5.2.7.1-3, and A.16.5.2.7.1-4 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.16.5.2.7.1-1 shows the variation of the downlink SNR of the CSI-RS in set q_0 in the active cell to emulate CSI-RS based beam failure. Figure A.16.5.2.7.1-1 additionally shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for

periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

Table A.16.5.2.7.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30 kHz SSB SCS, 20 MHz bandwidth
4	HD-FDD duplex mode, 15kHz SSB SCS, 10 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.16.5.2.7.1-2: General test parameters for FR1 PCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Value	Comment
			Test 1	
Active PCell			Cell 1	
RF Channel Number			1	
Duplex mode	Config 1, 4		FDD	
	Config 2, 3		TDD	
TDD Configuration	Config 1		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf..21	
	Config 4		Not Applicable	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	A.3.1.2
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
	Config 4		CR.1.1 FDD	
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD	A.3.1.3
	Config 2		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD	
	Config 4		CCR.1.1 FDD	
SSB Configuration	Config 1		SSB. 3 FR1	A.3.10
	Config 2		SSB. 3 FR1	
	Config 3		SSB.2 RedCap FR1	
	Config 4		SSB.3 FR1	
SMTC Configuration	Config 1, 2		SMTC.1	A.3.11
	Config 3		SMTC.1	
	Config 4		SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 KHz	
	Config 3		30 KHz	
PRACH Configuration	Config 1, 2, 4		FR1 PRACH configuration 4	A.3.8.2
	Config 3		FR1 PRACH configuration 4	A.3.8.2
csi-RS-Index assigned as beam failure detection RS in set q_0			0	
OCNG parameters			OP.1	A.3.2.1
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x1 Low	

Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			DRX.7	A.3.3.7
Gap pattern ID			N.A.	
csi-RS-Index assigned as candidate beam detection RS in set q_1			1	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1, 2	dBm/SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3		-95	
	Config 4		-98	
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see clause 5.17 of TS 38.321 [7]
beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [7]
CSI-RS configuration for q_0 and q_1	Config 1		CSI-RS.1.2 FDD	A.3.14.1
	Config 2		CSI-RS.1.2 TDD	
	Config 3		CSI-RS.2.2 TDD	
	Config 4		CSI-RS.1.2 FDD	
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD	A.3.14.1
	Config 2		CSI-RS.1.1 TDD	
	Config 3		CSI-RS.2.1 TDD	
	Config 4		CSI-RS.1.1 FDD	
TRS configuration	Config 1		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
	Config 4		TRS.1.1 FDD	
CSI-RS-Index assigned as RLM RS	Config 1		CSI-RS.1.2 FDD	
	Config 2		CSI-RS.1.2 TDD	
	Config 3		CSI-RS.2.2 TDD	
	Config 4		CSI-RS.1.2 FDD	
T310 Timer		ms	1000	
N310			2	
T1		s	1	During this time the the UE shall be fully synchronized to cell 1
T2		s	8.37	
T3		s	12.24	

T4	s	0	
T5	s	1.97	
D1	s	1.93	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.16.5.2.7.1-3: Cell specific test parameters for FR1 PCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set q_0	Config 1	dB	5	-3	-12	-12	-12
	Config 2		5	-3	-12	-12	-12
	Config 3		5	-3	-12	-12	-12
	Config 4		5	-3	-12	-12	-12
SNR_CSI-RS of set q_1	Config 1	dB	-10	-10	10	10	10
	Config 2		-10	-10	10	10	10
	Config 3		-10	-10	10	10	10
	Config 4		-10	-10	10	10	10
CSI-RS_RP of set q_1	Config 1	dB/SCS kHz	-110	-110	-88	-88	-88
	Config 2		-110	-110	-88	-88	-88
	Config 3		-107	-107	-85	-85	-85
	Config 4		-110	-110	-88	-88	-88
N_{oc}	Config 1	dBm/15 KHz	-98				
	Config 2		-98				
	Config 3		-98				
	Config 4		-98				
Propagation condition			TDL-C 300ns 100Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Void
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.

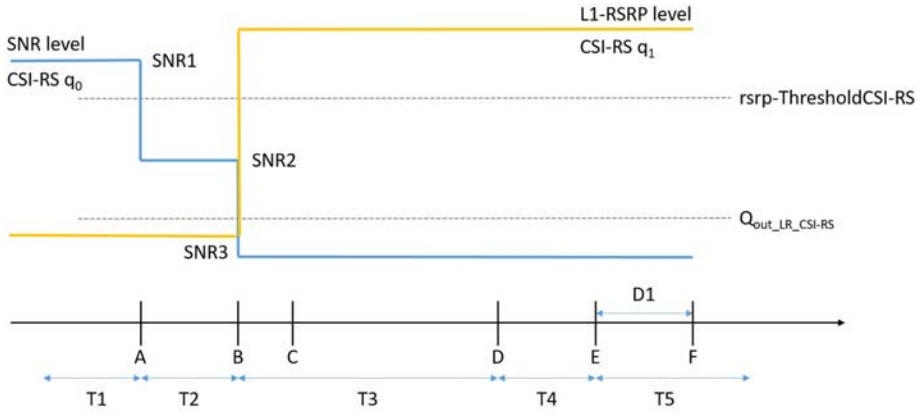

Figure A.16.5.2.7.1-1: SNR and L1-RSRP variation for CSI-RS-based beam failure detection and link recovery testing in DRX mode

A.16.5.2.7.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 1920+10 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.16.5.2.8 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with CSI-RS-based BFD and LR in DRX mode for 2 Rx UE

A.16.5.2.8.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5B.3.

The test parameters are given in Tables A.16.5.2.8.1-1, A.16.5.2.8.1-2, A.16.5.2.8.1-3, and A.16.5.2.8.1-4 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.16.5.2.8.1-1 shows the variation of the downlink SNR of the CSI-RS in set q_0 in the active cell to emulate CSI-RS based beam failure. Figure A.16.5.2.8.1-1 additionally shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for

periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

Table A.16.5.2.8.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30 kHz SSB SCS, 20 MHz bandwidth
4	HD-FDD duplex mode, 15kHz SSB SCS, 10 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.16.5.2.8.1-2: General test parameters for FR1 PCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Value	Comment
			Test 1	
Active PCell			Cell 1	
RF Channel Number			1	
Duplex mode	Config 1, 4		FDD	
	Config 2, 3		TDD	
TDD Configuration	Config 1		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf..21	
	Config 4		Not Applicable	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	A.3.1.2
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
	Config 4		CR.1.1 FDD	
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD	A.3.1.3
	Config 2		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD	
	Config 4		CCR.1.1 FDD	
SSB Configuration	Config 1		SSB. 3 FR1	A.3.10
	Config 2		SSB. 3 FR1	
	Config 3		SSB.2 RedCap FR1	
	Config 4		SSB.3 FR1	
SMTC Configuration	Config 1, 2		SMTC.1	A.3.11
	Config 3		SMTC.1	
	Config 4		SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 KHz	
	Config 3		30 KHz	
	Config 4		15 KHz	
PRACH Configuration	Config 1, 2, 4		FR1 PRACH configuration 4	A.3.8.2
	Config 3		FR1 PRACH configuration 4	A.3.8.2
csi-RS-Index assigned as beam failure detection RS in set q_0			0	
OCNG parameters			OP.1	A.3.2.1
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	

Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			DRX.7	A.3.3.7
Gap pattern ID			N.A.	
csi-RS-Index assigned as candidate beam detection RS in set q_1			1	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1, 2	dBm/SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3		-95	
	Config 4		-98	
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see clause 5.17 of TS 38.321 [7]
beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [7]
CSI-RS configuration for q_0 and q_1	Config 1		CSI-RS.1.2 FDD	A.3.14.1
	Config 2		CSI-RS.1.2 TDD	
	Config 3		CSI-RS.2.2 TDD	
	Config 4		CSI-RS.1.2 FDD	
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD	A.3.14.1
	Config 2		CSI-RS.1.1 TDD	
	Config 3		CSI-RS.2.1 TDD	
	Config 4		CSI-RS.1.1 FDD	
TRS configuration	Config 1		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
	Config 4		TRS.1.1 FDD	
CSI-RS-Index assigned as RLM RS	Config 1		CSI-RS.1.2 FDD	
	Config 2		CSI-RS.1.2 TDD	
	Config 3		CSI-RS.2.2 TDD	
	Config 4		CSI-RS.1.2 FDD	
T310 Timer		ms	1000	
N310			2	

T1	s	1	During this time the the UE shall be fully synchronized to cell 1
T2	s	8.37	
T3	s	6.44	
T4	s	0	
T5	s	1.97	
D1	s	1.93	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.16.5.2.8.1-3: Cell specific test parameters for FR1 PCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set q_0	Config 1	dB	5	-3	-12	-12	-12
	Config 2		5	-3	-12	-12	-12
	Config 3		5	-3	-12	-12	-12
	Config 4		5	-3	-12	-12	-12
SNR_CSI-RS of set q_1	Config 1	dB	-10	-10	10	10	10
	Config 2		-10	-10	10	10	10
	Config 3		-10	-10	10	10	10
	Config 4		-10	-10	10	10	10
CSI-RS_RP of set q_1	Config 1	dB/SCS kHz	-110	-110	-88	-88	-88
	Config 2		-110	-110	-88	-88	-88
	Config 3		-107	-107	-85	-85	-85
	Config 4		-110	-110	-88	-88	-88
N_{oc}	Config 1	dBm/15 KHz	-98				
	Config 2		-98				
	Config 3		-98				
	Config 4		-98				
Propagation condition			TDL-C 300ns 100Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Void
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band.

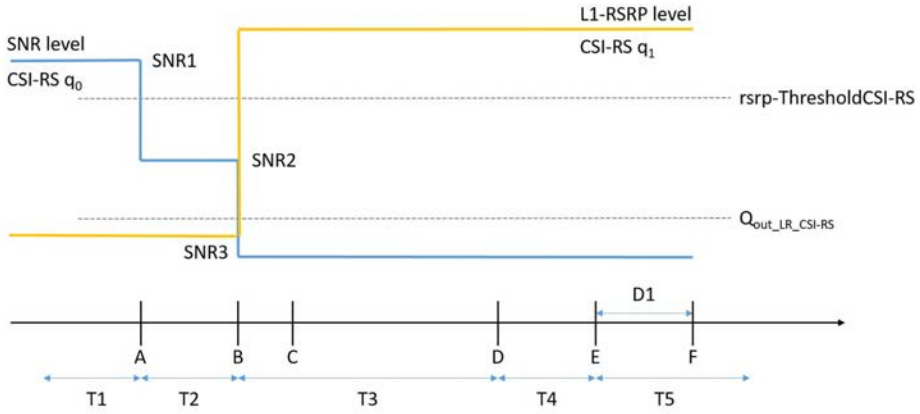

Figure A.16.5.2.8.1-1: SNR and L1-RSRP variation for CSI-RS-based beam failure detection and link recovery testing in DRX mode

A.16.5.2.8.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 1920+10 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.16.5.3 Active BWP switch

A.16.5.3.1 DCI-based and Timer-based Active BWP Switch

A.16.5.3.1.1 NR FR1 DL active BWP switch with non-DRX in SA for 1 Rx UE

A.16.5.3.1.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement for 1Rx RedCap defined in clause 8.6A.

The supported test configurations are shown in Table A.16.5.3.1.1.1-1. The test scenario comprises of one cell (Cell 1) as given in Table A.16.5.3.1.1.1-2. Cell-specific parameters of the cell are specified in Table A.16.5.3.1.1.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on Cell 1 to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 on radio channel 1.
- UE is configured with 2 different UE-specific downlink bandwidth parts, BWP-1 and BWP-2 before starting the test.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1.
- UE is configured with a *bwp-InactivityTimer* timer value for Cell1.

The cell has constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

> Time period T1 starts when a DCI format 1_1 command for DL BWP switch, sent from the test equipment to the UE, is received at the UE side in Cell1's slot # denoted *i*. The UE shall switch its bandwidth part from BWP-1 to BWP-2.
>
> The UE shall be able to receive PDSCH on the first DL slot that occurs after the beginning of Cell1's DL slot ($i+T_{BWPswitchDelay}$) as defined in clause 8.6A and starts to report valid ACK/NACK for the Cell1 no later than the first UL slot that occurs after the beginning of slot ($i+T_{BWPswitchDelay}+k1$). The UE shall be continuously scheduled on Cell1's BWP-2 starting from the first DL slot that occurs after the beginning of slot ($i+T_{BWPswitchDelay}$).

During T2, the test equipment won't transmit DCI format for PDSCH reception on Cell1.

During T3,

> The time period T3 starts from the slot #*j*, where j is the first slot of the subframe immediately after *bwp-InactivityTimer* timer expires. The UE shall switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1.
>
> The UE shall be able to receive PDSCH on the first DL slot that occurs after the beginning of Cell1's slot ($j+T_{BWPswitchDelay}$) as defined in clause 8.6A and starts to report valid ACK/NACK for the Cell1 at latest on the first UL slot that occurs after the beginning of slot ($j+T_{BWPswitchDelay}+k1$). The UE shall be continuously scheduled on Cell1's BWP-1 starting from the first DL slot that occurs after the beginning of slot ($j+T_{BWPswitchDelay}$).

The test equipment verifies the DL BWP switch time by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK/NACK is received.

Table A.16.5.3.1.1.1-1: DL BWP switch supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode,
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.16.5.3.1.1.1-2: General test parameters for DL BWP switch in SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active Cell		Cell 1	Cell1 on RF channel number 1.
CP length		Normal	

DRX		OFF	
bwp-InactivityTimer	ms	200	
T1	s	0.2	
T2	s	0.2	
T3	s	0.2	

Table A.6.5.6.1.2.1-3: NR Cell specific test parameters for DL BWP switch in SA

Parameter		Unit	Cell 1
Frequency Range			FR1
Duplex mode	Config 1,4		FDD
	Config 2,3		TDD
TDD configuration	Config 1,4		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
$BW_{channel}$	Config 1		10 MHz: $N_{RB,c}$ = 52
	Config 2		10 MHz: $N_{RB,c}$ = 52
	Config 3		20 MHz: $N_{RB,c}$ = 51
	Config 4		10 MHz: $N_{RB,c}$ = 52
Active BWP ID			1, 2
Initial DL BWP Configuration	Config 1,2,3,4		DLBWP.0.2 Note 4
Active DL BWP-1 Configuration	Config 1,2,3,4		DLBWP.1.1 Note 4
Active DL BWP-2 Configuration	Config 1,2,3,4		DLBWP.1.1 RedCap Note 4
Initial UL BWP Configuration	Config 1,2,3,4		ULBWP.0.2 Note 4
Active UL BWP-1 Configuration	Config 1,2,3,4		ULBWP.1.1 Note 4
Active UL BWP-2 Configuration	Config 1,4		N/A
	Config 2,3		ULBWP.1.1 RedCap Note 4
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2		SR.1.1 TDD
	Config 3		SR.2.1 TDD
RMSI CORESET parameters	Config 1,4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET parameters	Config 1,4		CCR.1.2 FDD
	Config 2		CCR.1.2 TDD
	Config 3		CCR.2.4 TDD
OCNG Patterns			OP.1
SSB Configuration	Config 1,2,4		SSB.1 FR1
	Config 3		SSB.1 RedCap FR1
SMTC Configuration			SMTC.1
Correlation Matrix and Antenna Configuration			1x1 Low
TRS Configuration	Config 1,4		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
EPRE ratio of PSS to SSS		dB	0

EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note 2	Config 1,2,4	dBm/SCS	-104
	Config 3		-101
N_{oc} Note 2		dBm/15kHz	-104
SS-RSRP Note 3	Config 1,2,4	dBm/SCS	-87
	Config 3		-84
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	Config 1,2,4	dBm/ 9.36MHz	-58.96
	Config 3	dBm/ 38.16MHz	-52.86
Propagation Condition			AWGN

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.1 RedCap is linked with ULBWP.1.1 RedCap defined in clause 12 of TS 38.213 [3].

A.16.5.3.1.1.2 Test Requirements

During T1, the UE shall start to send the ACK/NACK for Cell 1 from the first UL slot that occurs after the beginning of DL slot ($i+T_{BWPswitchDelay}+k1$).

During T3, the UE shall start to send the ACK/NACK for Cell 1 from the first UL slot that occurs after the beginning of DL slot ($j+T_{BWPswitchDelay}+k1$).

Where, *k1* is the timing between DL data receiving and acknowledgement as specified in [7].

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 8.6A.2-1.

All of the above test requirements shall be fulfilled in order for the observed Cell1 active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK/NACK in the first UL slot that occurs after beginning of DL slot ($i+T_{BWPswitchDelay}+k1$), ($j+T_{BWPswitchDelay}+k1$), then the UE shall use the next available uplink resource for reporting the corresponding ACK/NACK.

A.16.5.3.1.2 NR FR1 DL active BWP switch with non-DRX in SA for 2 Rx UE

A.16.5.3.1.1.2 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement for 1Rx RedCap defined in clause 8.6A.

The supported test configurations are shown in Table A.16.5.3.1.1.2-1. The test scenario comprises of one cell (Cell 1) as given in Table A.16.5.3.1.1.2-2. Cell-specific parameters of the cell are specified in Table A.16.5.3.1.1.2-3 below.

PDCCHs indicating new transmissions shall be sent continuously on Cell 1 to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 on radio channel 1.
- UE is configured with 2 different UE-specific downlink bandwidth parts, BWP-1 and BWP-2 before starting the test.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1.
- UE is configured with a *bwp-InactivityTimer* timer value for Cell1.

The cell has constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

> Time period T1 starts when a DCI format 1_1 command for DL BWP switch, sent from the test equipment to the UE, is received at the UE side in Cell1's slot # denoted *i*. The UE shall switch its bandwidth part from BWP-1 to BWP-2.
>
> The UE shall be able to receive PDSCH on the first DL slot that occurs after the beginning of Cell1's DL slot ($i+T_{BWPswitchDelay}$) as defined in clause 8.6A and starts to report valid ACK/NACK for the Cell1 no later than the first UL slot that occurs after the beginning of slot ($i+T_{BWPswitchDelay}+k1$). The UE shall be continuously scheduled on Cell1's BWP-2 starting from the first DL slot that occurs after the beginning of slot ($i+T_{BWPswitchDelay}$).

During T2, the test equipment won't transmit DCI format for PDSCH reception on Cell1.

During T3,

> The time period T3 starts from the slot #*j*, where j is the first slot of the subframe immediately after *bwp-InactivityTimer* timer expires. The UE shall switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1.
>
> The UE shall be able to receive PDSCH on the first DL slot that occurs after the beginning of Cell1's slot ($j+T_{BWPswitchDelay}$) as defined in clause 8.6A and starts to report valid ACK/NACK for the Cell1 at latest on the first UL slot that occurs after the beginning of slot ($j+T_{BWPswitchDelay}+k1$). The UE shall be continuously scheduled on Cell1's BWP-1 starting from the first DL slot that occurs after the beginning of slot ($j+T_{BWPswitchDelay}$).

The test equipment verifies the DL BWP switch time by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK/NACK is received.

Table A.16.5.3.1.1.2-1: DL BWP switch supported test configurations

Configuration	Description

1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode,
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.16.5.3.1.1.2-2: General test parameters for DL BWP switch in SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active Cell		Cell 1	Cell1 on RF channel number 1.
CP length		Normal	
DRX		OFF	
bwp-InactivityTimer	ms	200	
T1	s	0.2	
T2	s	0.2	
T3	s	0.2	

Table A.6.5.6.1.2.2-3: NR Cell specific test parameters for DL BWP switch in SA

Parameter		Unit	Cell 1
Frequency Range			FR1
Duplex mode	Config 1,4		FDD
	Config 2,3		TDD
TDD configuration	Config 1,4		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
$BW_{channel}$	Config 1		10 MHz: $N_{RB,c}$ = 52
	Config 2		10 MHz: $N_{RB,c}$ = 52
	Config 3		20 MHz: $N_{RB,c}$ = 51
	Config 4		10 MHz: $N_{RB,c}$ = 52
Active BWP ID			1, 2
Initial DL BWP Configuration	Config 1,2,3,4		DLBWP.0.2 Note 4
Active DL BWP-1 Configuration	Config 1,2,3,4		DLBWP.1.1 Note 4
Active DL BWP-2 Configuration	Config 1,2,3,4		DLBWP.1.1 RedCap Note 4
Initial UL BWP Configuration	Config 1,2,3,4		ULBWP.0.2 Note 4
Active UL BWP-1 Configuration	Config 1,2,3,4		ULBWP.1.1 Note 4
Active UL BWP-2 Configuration	Config 1,4		N/A
	Config 2,3		ULBWP.1.1 RedCap Note 4
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2		SR.1.1 TDD
	Config 3		SR.2.1 TDD
RMSI CORESET parameters	Config 1,4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET parameters	Config 1,4		CCR.1.2 FDD
	Config 2		CCR.1.2 TDD
	Config 3		CCR.2.4 TDD
OCNG Patterns			OP.1

SSB Configuration	Config 1,2,4		SSB.1 FR1
	Config 3		SSB.1 RedCap FR1
SMTC Configuration			SMTC.1
Correlation Matrix and Antenna Configuration			1x2 Low
TRS Configuration	Config 1,4		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note 2	Config 1,2,4	dBm/SCS	-104
	Config 3		-101
N_{oc} Note 2		dBm/15kHz	-104
SS-RSRP Note 3	Config 1,2,4	dBm/SCS	-87
	Config 3		-84
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	Config 1,2,4	dBm/ 9.36MHz	-58.96
	Config 3	dBm/ 38.16MHz	-52.86
Propagation Condition			AWGN

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.1 RedCap is linked with ULBWP.1.1 RedCap defined in clause 12 of TS 38.213 [3].

A.16.5.3.1.2.2 Test Requirements

During T1, the UE shall start to send the ACK/NACK for Cell 1 from the first UL slot that occurs after the beginning of DL slot ($i+T_{BWPswitchDelay}+k1$).

During T3, the UE shall start to send the ACK/NACK for Cell 1 from the first UL slot that occurs after the beginning of DL slot ($j+T_{BWPswitchDelay}+k1$).

Where, *k1* is the timing between DL data receiving and acknowledgement as specified in [7].

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 8.6A.2-1.

All of the above test requirements shall be fulfilled in order for the observed Cell1 active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK/NACK in the first UL slot that occurs after beginning of DL slot ($i+T_{BWPswitchDelay}+k1$), ($j+T_{BWPswitchDelay}+k1$), then the UE shall use the next available uplink resource for reporting the corresponding ACK/NACK.

A.16.5.3.2 RRC-based Active BWP Switch

A.16.5.3.2.1 NR FR1 DL active BWP switch of Cell with non-DRX in SA for 1 Rx UE

A.16.5.3.2.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement for RRC-based BWP switch defined in clause 8.6A.

The supported test configurations are shown in Table A.16.5.3.2.1.1-1. The test scenario comprises of one Cell (Cell 1) as given in Table A.16.5.3.2.1.1-2. Cell-specific parameters of Cell are specified in Table A.16.5.3.2.1.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on Cell 1 to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 on radio channel 1.
- UE has bandwidth part BWP-1 in its RRC-configuration for Cell 1.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 of initial condition in Cell 1.

All cells have constant signal levels throughout the test.

The test consists of 1 time period, with duration of T1.

During T1,

Time period T1 starts when a *RRCReconfiguration* with updated bandwidth part configuration, sent from the test equipment to the UE, is completely received at the UE side in PCell's slot # denoted *i*. The UE shall reconfigure its bandwidth part with the updated bandwidth part BWP-1 of final condition.

The UE shall be able to receive PDSCH on PCell from the first DL slot that occurs after the beginning of DL slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$ as defined in clause 8.6A.3 and starts to report valid ACK/NACK for the PCell from the first UL slot that occurs after the beginning of DL slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$ + k1 on BWP-1 of final condition. The UE shall be continuously scheduled on PCell's BWP-1 of final condition starting from the first DL slot right after slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$.

$T_{RRCprocessingDelay}$ and $T_{BWPswitchDelayRRC}$ are defined in clause 8.6A.3.

The test equipment verifies the DL BWP switch time in Cell by counting the time from the time when the RRC Reconfiguration message including updated BWP configuration is sent till the time when a vaild ACK/NACK is received is received.

Table A.16.5.3.2.1.1-1: DL BWP switch supported test configurations in SA scenario

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode,
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.16.5.3.2.1.1-2: General test parameters for DL BWP switch in SA scenario

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active Cell		Cell 1	Cell on RF channel number 1.
CP length		Normal	
DRX		OFF	
T1	s	0.2	

Table A.6.5.6.2.1.1-3: NR Cell specific test parameters for DL BWP switch in SA scenario

Parameter			Unit	Cell 1
Frequency Range				FR1
Duplex mode		Config 1,4		FDD
		Config 2,3		TDD
TDD configuration		Config 1,4		Not Applicable
		Config 2		TDDConf.1.1
		Config 3		TDDConf.2.1
$BW_{channel}$		Config 1,4		10 MHz: $N_{RB,c}$ = 52
		Config 2		10 MHz: $N_{RB,c}$ = 52
		Config 3		20 MHz: $N_{RB,c}$ = 51
Active BWP ID				1
Initial DL BWP Configuration		Config 1,2, 3,4		DLBWP.0.2
Initial UL BWP Configuration		Config 1,2, 3,4		ULBWP.0.2
Initial Condition	Active DL BWP-1 Configuration	Config 1, 2, 3,4		DLBWP.1.1 RedCap
	Active UL BWP-1 Configuration	Config 1, 2, 3,4		ULBWP.1.1 RedCap
Final Condition	Active DL BWP-1 Configuration	Config 1, 2, 3,4		DLBWP.1.1
	Active UL BWP-1 Configuration	Config 1, 2, 3,4		ULBWP.1.1
PDSCH Reference measurement channel		Config 1,4		SR.1.1 FDD
		Config 2		SR.1.1 TDD
		Config 3		SR2.1 TDD
RMSI CORESET parameters		Config 1,4		CR.1.1 FDD
		Config 2		CR.1.1 TDD

	Config 3		CR2.1 TDD
Dedicated CORESET parameters	Config 1,4		CCR.1.2 FDD
	Config 2		CCR.1.2 TDD
	Config 3		CCR.2.4 TDD
OCNG Patterns			OP.1
SSB Configuration	Config 1,2,4		SSB.1 FR1
	Config 3		SSB.1 RedCap FR1
SMTC Configuration			SMTC.1
TRS Configuration	Config 1,4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.1 TDD
Antenna Configuration			1x1 Low
Propagation Condition			AWGN
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS(Note 1)			
N_{oc} Note 2	Config 1,2	dBm/SCS	-104
	Config 3		-101
SS-RSRP Note 3	Config 1,2	dBm/SCS	-87
	Config 3		-84
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	Config 1,2	dBm/ 9.36MHz	-58.96
	Config 3	dBm/ 38.16MHz	-52.86

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.1 RedCap is linked with ULBWP.1.1 RedCap defined in clause 12 of TS 38.213 [3].

A.16.5.3.2.1.2 Test Requirements

During T1, the UE shall be ready for the reception of uplink grant for the Cell from the first DL slot that occurs right after the begining of slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$ and starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$ + k1.

Where, *k1* is the timing between DL data receiving and acknowledgement as specified in [7].

All of the above test requirements shall be fulfilled in order for the observed Cell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

A.16.5.3.2.2 NR FR1 DL active BWP switch of Cell with non-DRX in SA for 2 Rx UE

A.16.5.3.2.2.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement for RRC-based BWP switch defined in clause 8.6A.

The supported test configurations are shown in Table A.16.5.3.2.2.1-1. The test scenario comprises of one Cell (Cell 1) as given in Table A.16.5.3.2.2.1-2. Cell-specific parameters of Cell are specified in Table A.16.5.3.2.2.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on Cell 1 to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 on radio channel 1.
- UE has bandwidth part BWP-1 in its RRC-configuration for Cell 1.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 of initial condition in Cell 1.

All cells have constant signal levels throughout the test.

The test consists of 1 time period, with duration of T1.

During T1,

Time period T1 starts when a *RRCReconfiguration* with updated bandwidth part configuration, sent from the test equipment to the UE, is completely received at the UE side in PCell's slot # denoted *i*. The UE shall reconfigure its bandwidth part with the updated bandwidth part BWP-1 of final condition.

The UE shall be able to receive PDSCH on PCell from the first DL slot that occurs after the beginning of DL slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$ as defined in clause 8.6A.3 and starts to report valid ACK/NACK for the PCell from the first UL slot that occurs after the beginning of DL slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$ + k1 on BWP-1 of final condition. The UE shall be continuously scheduled on PCell's BWP-1 of final condition starting from the first DL slot right after slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$.

$T_{\text{RRCprocessingDelay}}$ and $T_{\text{BWPswitchDelayRRC}}$ are defined in clause 8.6A.3.

The test equipment verifies the DL BWP switch time in Cell by counting the time from the time when the RRC Reconfiguration message including updated BWP configuration is sent till the time when a vaild ACK/NACK is received is received.

Table A.16.5.3.2.2.1-1: DL BWP switch supported test configurations in SA scenario

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode,
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.16.5.3.2.2.1-2: General test parameters for DL BWP switch in SA scenario

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active Cell		Cell 1	Cell on RF channel number 1.
CP length		Normal	
DRX		OFF	
T1	s	0.2	

Table A.6.5.6.2.2.1-3: NR Cell specific test parameters for DL BWP switch in SA scenario

Parameter			Unit	Cell 1
Frequency Range				FR1
Duplex mode		Config 1,4		FDD
		Config 2,3		TDD
TDD configuration		Config 1,4		Not Applicable
		Config 2		TDDConf.1.1
		Config 3		TDDConf.2.1
$BW_{channel}$		Config 1,4		10 MHz: $N_{RB,c}$ = 52
		Config 2		10 MHz: $N_{RB,c}$ = 52
		Config 3		20 MHz: $N_{RB,c}$ = 51
Active BWP ID				1
Initial DL BWP Configuration		Config 1,2, 3,4		DLBWP.0.2
Initial UL BWP Configuration		Config 1,2, 3,4		ULBWP.0.2
Initial Condition	Active DL BWP-1 Configuration	Config 1, 2, 3,4		DLBWP.1.1 RedCap
	Active UL BWP-1 Configuration	Config 1, 2, 3,4		ULBWP.1.1 RedCap
Final Condition	Active DL BWP-1 Configuration	Config 1, 2, 3,4		DLBWP.1.1
	Active UL BWP-1 Configuration	Config 1, 2, 3,4		ULBWP.1.1
PDSCH Reference measurement channel		Config 1,4		SR.1.1 FDD
		Config 2		SR.1.1 TDD
		Config 3		SR2.1 TDD
RMSI CORESET parameters		Config 1,4		CR.1.1 FDD
		Config 2		CR.1.1 TDD
		Config 3		CR2.1 TDD
Dedicated CORESET parameters		Config 1,4		CCR.1.2 FDD
		Config 2		CCR.1.2 TDD
		Config 3		CCR.2.4 TDD
OCNG Patterns				OP.1
SSB Configuration		Config 1,2,4		SSB.1 FR1
		Config 3		SSB.1 RedCap FR1
SMTC Configuration				SMTC.1
TRS Configuration		Config 1,4		TRS.1.1 FDD

	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.1 TDD
Antenna Configuration			1x2 Low
Propagation Condition			AWGN
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS(Note 1)			
N_{oc}Note 2	Config 1,2,4	dBm/SCS	-104
	Config 3		-101
SS-RSRP Note 3	Config 1,2,4	dBm/SCS	-87
	Config 3		-84
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	Config 1,2,4	dBm/ 9.36MHz	-58.96
	Config 3	dBm/ 38.16MHz	-52.86

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.2 RedCap is linked with ULBWP.1.1 RedCap defined in clause 12 of TS 38.213 [3].

A.16.5.3.2.2.2 Test Requirements

During T1, the UE shall be ready for the reception of uplink grant for the Cell from the first DL slot that occurs right after the begining of slot $i + \frac{T_{\text{RRCprocessingDelay}} + T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$ and starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot $i + \frac{T_{\text{RRCprocessingDelay}} + T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}} + k1$.

Where, *k1* is the timing between DL data receiving and acknowledgement as specified in [7].

All of the above test requirements shall be fulfilled in order for the observed Cell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

A.16.5.4 UE specific CBW change

A.16.5.4.1 UE specific CBW change on PCell in FR1 in non-DRX for 1 Rx UE

A.16.5.4.1.1 Test Purpose and Environment

The purpose of this test is to verify the UE specific CBW change delay requirement defined in clause 8.13A.

The supported test configurations are shown in Table A.16.5.4.1.1-1. The test scenario comprises of one Cell (Cell 1) as given in Table A.16.5.4.1.1-2. Cell-specific parameters are specified in Table A.16.5.4.1.1-3.

PDCCHs indicating new transmissions shall be sent continuously on Cell 1 to ensure that the UE sends ACK/NACK during the test.

Before the test starts:

- UE is connected to Cell 1 on radio channel 1.
- UE has bandwidth part BWP-1 in its RRC-configuration for Cell 1.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 of initial condition in Cell 1.
- UE has been configured with UE specific CBW (CBW-1).
- UE is indicated in *SCS-SpecificCarrier* [2] that the UE specific CBW is CBW-1 as the initial condition in Cell 1.

Cell1 has constant signal levels throughout the test.

The test consists of 1 time period, with duration of T1.

During T1,

> Time period T1 starts when a *RRCReconfiguration* containing *SCS-SpecificCarrier* with updated UE specific CBW, sent from the test equipment to the UE, is completely received at the UE side in Cell 1's slot # denoted *i*. The UE shall reconfigure its UE specific CBW with the updated CBW-2 for the final condition.
>
> The UE shall be able to receive PDSCH on Cell 1 from the first DL slot that occurs after the beginning of DL slot $i + \frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$ as defined in clause 8.13A and starts to report valid ACK/NACK for Cell 1from the first UL slot that occurs after the beginning of DL slot $i + \frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length} + k1$ on the Cell 1's BWP-1 on CBW-2 for the final condition. The UE shall be continuously scheduled on the Cell 1's BWP-1 on CBW-2 for the final condition starting from the first DL slot right after slot $i + \frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$.
>
> $T_{RRCprocessingDelay}$ and $T_{CBWchangeDelayRRC}$ are defined in clause 8.13A.

The test equipment verifies the UE specific CBW switching delay in Cell 1 by estimating the time from the moment the RRC Reconfiguration message including updated UE specific CBW configuration is sent until the moment a vaild ACK/NACK is received.

Table A.16.5.4.1.1-1: Supported test configurations for UE specific CBW change in SA scenario

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode,

Note: The UE is only required to be tested in one of the supported test configurations.

Table A.6.5.4.1.1-2: General test parameters for UE specific CBW change in SA scenario

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active Cell		Cell 1	Cell on RF channel number 1.
CP length		Normal	
DRX		OFF	
T1	s	0.2	

Table A.6.5.4.1.1-3: NR Cell specific test parameters for UE specific CBW change in SA scenario

Parameter			Unit	Cell 1
Frequency Range				FR1
Duplex mode		Config 1		FDD
		Config 2,3		TDD
		Config 4		HD-FDD
TDD configuration		Config 1,4		Not Applicable
		Config 2		TDDConf.1.1
		Config 3		TDDConf.2.1
$BW_{channel}$		Config 1		10 MHz: $N_{RB,c}$ = 52
		Config 2		10 MHz: $N_{RB,c}$ = 52
		Config 3		20 MHz: $N_{RB,c}$ = 51
		Config 4		10 MHz: $N_{RB,c}$ = 52
Active DL BWP ID		Config 1,2, 3,4		0
Initial DL BWP Configuration (BWP-1)		Config 1,2, 3,4		DLBWP.0.2
Initial UL BWP Configuration		Config 1,2, 3,4		ULBWP.0.2
Initial Condition	Active DL CBW Configuration (CBW-1)	Config 1, 2, 3,4		DLCBW.1.1
	Active UL CBW Configuration (CBW-1)	Config 1, 2, 3,4		ULCBW.1.1
Final Condition	Active DL CBW Configuration (CBW-2)	Config 1, 2, 3,4		DLCBW.1.2
	Active UL CBW Configuration (CBW-2)	Config 1, 2, 3,4		ULCBW.1.2
PDSCH Reference measurement channel		Config 1,4		SR.1.1 FDD
		Config 2		SR.1.1 TDD
		Config 3		SR.2.1 TDD
RMSI CORESET parameters		Config 1,4		CR.1.1 FDD
		Config 2		CR.1.1 TDD
		Config 3		CR.2.1 TDD
Dedicated CORESET parameters		Config 1,4		CCR.1.1 FDD
		Config 2		CCR.1.1 TDD
		Config 3		CCR.2.1 TDD
OCNG Patterns				OP.1

SSB Configuration	Config 1,2,4		SSB.1 FR1
	Config 3		SSB.1 RedCap FR1
SMTC Configuration			SMTC.1 RedCap FR1
TRS Configuration	Config 1,4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
Antenna Configuration			1x1
Propagation Condition			AWGN
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS(Note 1)			
N_{oc} Note 2	Config 1,2,4	dBm/SCS	-104
	Config 3		-101
SS-RSRP Note 3	Config 1,2,4	dBm/SCS	-87
	Config 3		-84
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	Config 1,2,4	dBm/ 9.36MHz	-58.96
	Config 3	dBm/ 18.36MHz	-56.04

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.1 is linked with ULBWP.0.1; DLBWP.1.1 is linked with ULBWP.1.1; as defined in clause 12 of TS 38.213 [3].

A.16.5.4.1.2 Test Requirements

During T1, the UE shall be ready for the reception of uplink grant for the Cell 1 from the first DL slot that occurs right after the begining of slot $i + \frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$ and starts to report valid ACK/NACK for Cell 1 from the first UL slot that occurs after the beginning of DL slot $i + \frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length} + k1$.

Where, *k1* is the timing between DL data receiving and acknowledgement as specified in [7].

All of the above test requirements shall be fulfilled in order for the observed UE specific CBW change delay on the Cell 1 to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

A.16.5.4.2 UE specific CBW change on PCell in FR1 in non-DRX for 2 Rx UE

A.16.5.4.2.1 Test Purpose and Environment

The purpose of this test is to verify the UE specific CBW change delay requirement defined in clause 8.13A.

The supported test configurations are shown in Table A.16.5.4.2.1-1. The test scenario comprises of one Cell (Cell 1) as given in Table A.16.5.4.2.1-2. Cell-specific parameters are specified in Table A.16.5.4.2.1-3.

PDCCHs indicating new transmissions shall be sent continuously on Cell 1 to ensure that the UE sends ACK/NACK during the test.

Before the test starts:

- UE is connected to Cell 1 on radio channel 1.
- UE has bandwidth part BWP-1 in its RRC-configuration for Cell 1.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 of initial condition in Cell 1.
- UE has been configured with UE specific CBW (CBW-1).
- UE is indicated in *SCS-SpecificCarrier* [2] that the UE specific CBW is CBW-1 as the initial condition in Cell 1.

Cell1 has constant signal levels throughout the test.

The test consists of 1 time period, with duration of T1.

During T1,

Time period T1 starts when a *RRCReconfiguration* containing *SCS-SpecificCarrier* with updated UE specific CBW, sent from the test equipment to the UE, is completely received at the UE side in Cell 1's slot # denoted *i*. The UE shall reconfigure its UE specific CBW with the updated CBW-2 for the final condition.

The UE shall be able to receive PDSCH on Cell 1 from the first DL slot that occurs after the beginning of DL slot $i + \frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$ as defined in clause 8.13A and starts to report valid ACK/NACK for Cell 1from the first UL slot that occurs after the beginning of DL slot $i + \frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length} + k1$ on the Cell 1's BWP-1 on CBW-2 for the final condition. The UE shall be continuously scheduled on the Cell 1's BWP-1 on CBW-2 for the final condition starting from the first DL slot right after slot $i + \frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$.

$T_{RRCprocessingDelay}$ and $T_{CBWchangeDelayRRC}$ are defined in clause 8.13A.

The test equipment verifies the UE specific CBW switching delay in Cell 1 by estimating the time from the moment the RRC Reconfiguration message including updated UE specific CBW configuration is sent until the moment a vaild ACK/NACK is received.

Table A.16.5.4.2.1-1: Supported test configurations for UE specific CBW change in SA scenario

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode,
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.6.5.4.2.1-2: General test parameters for UE specific CBW change in SA scenario

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active Cell		Cell 1	Cell on RF channel number 1.

CP length		Normal	
DRX		OFF	
T1	s	0.2	

Table A.6.5.4.2.1-3: NR Cell specific test parameters for UE specific CBW change in SA scenario

Parameter			Unit	Cell 1
Frequency Range				FR1
Duplex mode		Config 1		FDD
		Config 2,3		TDD
		Config 4		HD-FDD
TDD configuration		Config 1,4		Not Applicable
		Config 2		TDDConf.1.1
		Config 3		TDDConf.2.1
$BW_{channel}$		Config 1		10 MHz: $N_{RB,c}$ = 52
		Config 2		10 MHz: $N_{RB,c}$ = 52
		Config 3		20 MHz: $N_{RB,c}$ = 51
		Config 4		10 MHz: $N_{RB,c}$ = 52
Active DL BWP ID		Config 1,2, 3,4		0
Initial DL BWP Configuration (BWP-1)		Config 1,2, 3,4		DLBWP.0.2
Initial UL BWP Configuration		Config 1,2, 3,4		ULBWP.0.2
Initial Condition	Active DL CBW Configuration (CBW-1)	Config 1, 2, 3,4		DLCBW.1.1
	Active UL CBW Configuration (CBW-1)	Config 1, 2, 3,4		ULCBW.1.1
Final Condition	Active DL CBW Configuration (CBW-2)	Config 1, 2, 3,4		DLCBW.1.2
	Active UL CBW Configuration (CBW-2)	Config 1, 2, 3,4		ULCBW.1.2
PDSCH Reference measurement channel		Config 1,4		SR.1.1 FDD
		Config 2		SR.1.1 TDD
		Config 3		SR2.1 TDD
RMSI CORESET parameters		Config 1,4		CR.1.1 FDD
		Config 2		CR.1.1 TDD
		Config 3		CR2.1 TDD
Dedicated CORESET parameters		Config 1,4		CCR.1.1 FDD
		Config 2		CCR.1.1 TDD
		Config 3		CCR.2.1 TDD
OCNG Patterns				OP.1
SSB Configuration		Config 1,2,4		SSB.1 FR1
		Config 3		SSB.1 RedCap FR1
SMTC Configuration				SMTC.1 RedCap FR1
TRS Configuration		Config 1,4		TRS.1.1 FDD
		Config 2		TRS.1.1 TDD
		Config 3		TRS.1.2 TDD
Antenna Configuration				1x2 Low

Propagation Condition			AWGN
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS(Note 1)			
N_{oc} Note 2	Config 1,2,4	dBm/SCS	-104
	Config 3		-101
SS-RSRP Note 3	Config 1,2,4	dBm/SCS	-87
	Config 3		-84
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	Config 1,2,4	dBm/ 9.36MHz	-58.96
	Config 3	dBm/ 18.36MHz	-56.04

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.1 is linked with ULBWP.0.1; DLBWP.1.1 is linked with ULBWP.1.1; as defined in clause 12 of TS 38.213 [3].

A.16.5.4.2.2 Test Requirements

During T1, the UE shall be ready for the reception of uplink grant for the Cell 1 from the first DL slot that occurs right after the begining of slot $i + \frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$ and starts to report valid ACK/NACK for Cell 1 from the first UL slot that occurs after the beginning of DL slot $i + \frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length} + k1$.

Where, *k1* is the timing between DL data receiving and acknowledgement as specified in [7].

All of the above test requirements shall be fulfilled in order for the observed UE specific CBW change delay on the Cell 1 to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

A.16.6 Measurement procedure for RedCap

A.16.6.1 Intra-frequency Measurements

A.16.6.1.1 SA event triggered reporting tests without gap under non-DRX for 1 Rx UE

A.16.6.1.1.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clauses 9.2B.5.1 and 9.2B.5.2.

A.16.6.1.1.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for PCell and neighbour cell are given in Table A.16.6.1.1.1-1 and A.16.6.1.1.1-2 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

Table A.16.6.1.1.1.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.16.6.1.1.1.2-2: General test parameters for SA intra-frequency event triggered reporting without gap for FR1

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3, 4	Cell 1	
Neighbour cell		1, 2, 3, 4	Cell 2	Cell to be identified.
RF Channel Number		1, 2, 3, 4	1: Cell 1 and Cell 2	
CD-SSB configuration		1,2,4	SSB.1 FR1	
		3	SSB.1 RedCap FR1	
NCD-SSB configuration		1, 4	SSB.6 RedCap FR1 (Note 1)	
		2	SSB.6 RedCap FR1 (Note 1)	
		3	SSB.7 RedCap FR1 (Note 1)	
SMTC configuration for NCD-SSB		1, 4	SMTC.4 RedCap	
		2	SMTC.2 RedCap	
		3	SMTC.2 RedCap	
A3-Offset	dB	1, 2, 3, 4	-4.5	
CP length		1, 2, 3, 4	Normal	
Hysteresis	dB	1, 2, 3, 4	0	
Time To Trigger	s	1, 2, 3, 4	0	
Filter coefficient		1, 2, 3, 4	0	L3 filtering is not used
DRX		1, 2, 3, 4		OFF
Time offset between serving and neighbour cells		1, 4	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 μs	Synchronous cells
		3	3 μs	Synchronous cells
T1	s	1, 2, 3, 4	5	
T2	s	1, 2, 3, 4	5	
Note 1: NCD-SSB is configured within dedicated RedCap DL BWP.				

Table A.16.6.1.1.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting without gap for FR1

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 4	N/A		N/A	

		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD		N/A	
		3	CR.2.1 TDD		N/A	
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD		N/A	
		3	CCR.2.1 TDD		N/A	
OCNG Patterns		1, 2, 3,4	OP.1		OP.1	
TRS Configuration		1, 4	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD		N/A	
		3	TRS.1.2 TDD		N/A	
Initial BWP configuration		1, 2, 3, 4	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3, 4	DLBWP.1.3 RedCap		DLBWP.1.3 RedCap	
Active UL BWP configuration		1, 2, 3, 4	ULBWP.1.3 RedCap		ULBWP.1.3 RedCap	
RLM-RS		1, 2, 3, 4	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1, 4	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1, 4	-98			
		2				
		3				
$\hat{E}_s / I_{ot}$	dB	1, 4	4	-1.46	-Infinity	-1.46
		2				
		3				
$\hat{E}_s / N_{oc}$	dB	1, 4	4	4	-Infinity	4
		2				
		3				
SS-RSRP Note 3	dBm/SCS kHz	1, 4	-94	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1, 4	-64.60	-62.25	-64.60	-62.25
	dBm/9.36 MHz	2	-64.60	-62.25	-64.60	-62.25
	dBm/18.36 MHz	3	-61.68	-59.34	-61.68	-59.34
Propagation Condition		1, 2, 3, 4	AWGN			
Antenna Configuration			1x1		1x1	

Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.16.6.1.1.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1000 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.1.2 SA event triggered reporting tests without gap under non-DRX for 2 Rx UE

A.16.6.1.2.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clauses 9.2B.5.1 and 9.2B.5.2.

A.16.6.1.2.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for PCell and neighbour cell are given in Table A.16.6.1.2.1-1 and A.16.6.1.2.1-2 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

Table A.16.6.1.2.1.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.16.6.1.2.2-2: General test parameters for SA intra-frequency event triggered reporting without gap for FR1

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3, 4	Cell 1	
Neighbour cell		1, 2, 3, 4	Cell 2	Cell to be identified.
RF Channel Number		1, 2, 3, 4	1: Cell 1 and Cell 2	
CD-SSB configuration		1,2,4	SSB.1 FR1	

		3	SSB.1 RedCap FR1	
NCD-SSB configuration		1, 4	SSB.6 RedCap FR1 (Note 1)	
		2	SSB.6 RedCap FR1 (Note 1)	
		3	SSB.7 RedCap FR1 (Note 1)	
SMTC configuration for NCD-SSB		1, 4	SMTC.4 RedCap	
		2	SMTC.2 RedCap	
		3	SMTC.2 RedCap	
A3-Offset	dB	1, 2, 3, 4	-4.5	
CP length		1, 2, 3, 4	Normal	
Hysteresis	dB	1, 2, 3, 4	0	
Time To Trigger	s	1, 2, 3, 4	0	
Filter coefficient		1, 2, 3, 4	0	L3 filtering is not used
DRX		1, 2, 3, 4		OFF
Time offset between serving and neighbour cells		1, 4	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 µs	Synchronous cells
		3	3 µs	Synchronous cells
T1	s	1, 2, 3, 4	5	
T2	s	1, 2, 3, 4	5	
Note 1: NCD-SSB is configured within dedicated RedCap DL BWP.				

Table A.16.6.1.2.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting without gap for FR1

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 4	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD		N/A	
		3	CR.2.1 TDD		N/A	
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD		N/A	
		3	CCR.2.1 TDD		N/A	
OCNG Patterns		1, 2, 3,4	OP.1		OP.1	
TRS Configuration		1, 4	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD		N/A	
		3	TRS.1.2 TDD		N/A	
Initial BWP configuration		1, 2, 3, 4	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3, 4	DLBWP.1.3 RedCap		DLBWP.1.3 RedCap	
Active UL BWP configuration		1, 2, 3, 4	ULBWP.1.3 RedCap		ULBWP.1.3 RedCap	
RLM-RS		1, 2, 3, 4	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1, 4	-98			

		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1, 4	-98			
		2				
		3				
$\hat{E}_s/I_{ot}$	dB	1, 4	4	-1.46	-Infinity	-1.46
		2				
		3				
$\hat{E}_s/N_{oc}$	dB	1, 4	4	4	-Infinity	4
		2				
		3				
SS-RSRP Note 3	dBm/SCS kHz	1, 4	-94	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1, 4	-64.60	-62.25	-64.60	-62.25
	dBm/9.36 MHz	2	-64.60	-62.25	-64.60	-62.25
	dBm/18.36 MHz	3	-61.68	-59.34	-61.68	-59.34
Propagation Condition		1, 2, 3, 4	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.16.6.1.2.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 100 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.1.3 SA event triggered reporting tests without gap under DRX for 1 Rx UE

A.16.6.1.3.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell identification and measurement period requirements in clauses 9.2B.5.1 and 9.2B.5.2.

A.16.6.1.3.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for PCell are given in Table A.16.6.1.3.2-1, A.16.6.1.3.2-2 and A.16.6.1.3.2-3 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of

two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furhtermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.16.6.1.3.2-1: Supported test configurations for NR Redcap UE

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode,
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.16.6.1.3.2-2: General test parameters for SA intra-frequency event triggered reporting without gap for PCell in FR1 with DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
Active cell		1, 2, 3, 4	Cell 1		
Neighbour cell		1, 2, 3, 4	Cell 2		Cell to be identified.
RF Channel Number		1, 2, 3, 4	1: Cell 1 and Cell 2		
SSB configuration		1, 4	SSB.1 FR1		
		2	SSB.1 FR1		
		3	SSB.1 RedCap FR1		
SMTC configuration		1, 4	SMTC.1 RedCap FR1		
		2	SMTC.1 RedCap FR1		
		3	SMTC.1 RedCap FR1		
A3-Offset	dB	1, 2, 3, 4	-4.5		
CP length		1, 2, 3, 4	Normal		
Hysteresis	dB	1, 2, 3, 4	0		
Time To Trigger	s	1, 2, 3, 4	0		
Filter coefficient		1, 2, 3, 4	0		L3 filtering is not used
DRX		1, 2, 3, 4	DRX.1	DRX. 7	
Time offset between serving and neighbour cells		1, 4	3 ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 µs		Synchronous cells
		3	3 µs		Synchronous cells
T1	s	1, 2, 3, 4	5		
T2	s	1, 2, 3, 4	5	10	

Table A.16.6.1.3.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting without gap for PCell in FR1 with DRX

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 4	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	

PDSCH RMC configuration		1, 4	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD		N/A	
		3	CR.2.1 TDD		N/A	
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD		N/A	
		3	CCR.2.1 TDD		N/A	
OCNG Patterns		1, 2, 3, 4	OP.1		OP.1	
TRS configuration		1, 4	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD		N/A	
		3	TRS.1.2 TDD		N/A	
Initial BWP configuration		1, 2, 3, 4	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3, 4	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3, 4	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2, 3, 4	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1, 4	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1, 4	-98			
		2				
		3				
$\hat{E}_s / I_{ot}$	dB	1, 4	4	-1.46	-Infinity	-1.46
		2				
		3				
$\hat{E}_s / N_{oc}$	dB	1, 4	4	4	-Infinity	4
		2				
		3				
SS-RSRP Note 3	dBm/SCS kHz	1, 4	-94	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1, 4	-64.60	-62.25	-64.60	-62.25
	dBm/9.36 MHz	2	-64.60	-62.25	-64.60	-62.25
	dBm/18.36 MHz	3	-61.68	-59.34	-61.68	-59.34
Propagation Condition		1, 2, 3, 4	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.16.6.1.3.3 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 7680 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.1.4 SA event triggered reporting tests without gap under DRX for 2 Rx UE

A.16.6.1.4.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell identification and measurement period requirements in clauses 9.2B.5.1 and 9.2B.5.2.

A.16.6.1.4.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for PCell are given in Table A.16.6.1.4.2-1, A.16.6.1.4.2-2 and A.16.6.1.4.2-3 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furhtermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.16.6.1.4.2-1: Supported test configurations for NR Redcap UE

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode,
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.16.6.1.3.2-2: General test parameters for SA intra-frequency event triggered reporting without gap for PCell in FR1 with DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
Active cell		1, 2, 3, 4	Cell 1		
Neighbour cell		1, 2, 3, 4	Cell 2		Cell to be identified.
RF Channel Number		1, 2, 3, 4	1: Cell 1 and Cell 2		
SSB configuration		1, 4	SSB.1 FR1		

		2	SSB.1 FR1		
		3	SSB.1 RedCap FR1		
SMTC configuration		1, 4	SMTC.1 RedCap FR1		
		2	SMTC.1 RedCap FR1		
		3	SMTC.1 RedCap FR1		
A3-Offset	dB	1, 2, 3, 4	-4.5		
CP length		1, 2, 3, 4	Normal		
Hysteresis	dB	1, 2, 3, 4	0		
Time To Trigger	s	1, 2, 3, 4	0		
Filter coefficient		1, 2, 3, 4	0		L3 filtering is not used
DRX		1, 2, 3, 4	DRX.1	DRX. 7	
Time offset between serving and neighbour cells		1, 4	3 ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 µs		Synchronous cells
		3	3 µs		Synchronous cells
T1	s	1, 2, 3, 4	5		
T2	s	1, 2, 3, 4	5	10	

Table A.16.6.1.4.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting without gap for PCell in FR1 with DRX

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 4	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD		N/A	
		3	CR.2.1 TDD		N/A	
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD		N/A	
		3	CCR.2.1 TDD		N/A	
OCNG Patterns		1, 2, 3, 4	OP.1		OP.1	
TRS configuration		1, 4	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD		N/A	
		3	TRS.1.2 TDD		N/A	
Initial BWP configuration		1, 2, 3, 4	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3, 4	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3, 4	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2, 3, 4	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1, 4	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1, 4	-98			

		2				
		3				
$\hat{E}_s/I_{ot}$	dB	1, 4	4	-1.46	-Infinity	-1.46
		2				
		3				
$\hat{E}_s/N_{oc}$	dB	1, 4	4	4	-Infinity	4
		2				
		3				
SS-RSRP Note 3	dBm/SCS kHz	1, 4	-94	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1, 4	-64.60	-62.25	-64.60	-62.25
	dBm/9.36 MHz	2	-64.60	-62.25	-64.60	-62.25
	dBm/18.36 MHz	3	-61.68	-59.34	-61.68	-59.34
Propagation Condition		1, 2, 3, 4	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.16.6.1.4.3 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 6400 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.1.5 SA event triggered reporting tests with per-UE gaps under non-DRX for 1 Rx UE

A.16.6.1.5.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clause 9.2B.6.1 and 9.2B.6.2.

A.16.6.1.5.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for PCell are given in Table A.16.6.1.5.2-1 and A.16.6.1.5.2-2 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time

periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

Table A.16.6.1.5.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.16.6.1.5.2-2: General test parameters for SA intra-frequency event triggered reporting with per-UE gaps for PCell in FR1

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3, 4	Cell 1	
Neighbour cell		1, 2, 3, 4	Cell 2	Cell to be identified.
RF Channel Number		1, 2, 3, 4	1: Cell 1 and Cell 2	
Measurement gap type		1, 2, 3, 4	Per-UE gaps	
Measurement gap repitition periodicity	ms	1, 2, 3, 4	40	
Measurement gap length	ms	1, 2, 3, 4	6	
Measurement gap offset	ms	1, 2, 3, 4	39	
SSB configuration		1, 2, 4	SSB.1 FR1	
		3	SSB.1 RedCap FR1	
SMTC configuration		1, 4	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
CSI-RS parameters		1, 4	CSI-RS.1.2 FDD resource #0	
		2	CSI-RS.1.2 TDD resource #0	
		3	CSI-RS.2.2 TDD resource #0	
A3-Offset	dB	1, 2, 3, 4	-4.5	
CP length		1, 2, 3, 4	Normal	
Hysteresis	dB	1, 2, 3, 4	0	
Time To Trigger	s	1, 2, 3, 4	0	
Filter coefficient		1, 2, 3, 4	0	L3 filtering is not used
DRX	ms	1, 2, 3, 4		OFF
Time offset between serving and neighbour cells		1, 4	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 μs	Synchronous cells
		3	3 μs	Synchronous cells
T1	s	1, 2, 3, 4	5	
T2	s	1, 2, 3, 4	5	

Table A.16.6.1.5.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting with per-UE gaps for PCell in FR1

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 4	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD		N/A	
		3	CR.2.1 TDD		N/A	
Dedicated CORESET RMC configuration		1, 4	CCR.1.2 FDD		N/A	
		2	CCR.1.2 TDD		N/A	
		3	CCR.2.1 TDD		N/A	
OCNG Patterns		1, 2, 3, 4	OP.1		OP.1	
TRS configuration		1, 4	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD		N/A	
		3	TRS.1.2 TDD		N/A	
Initial BWP configuration		1, 2, 3, 4	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3, 4	DLBWP.1.2		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3, 4	DLBWP.1.2		ULBWP.1.1	
RLM-RS		1, 2, 3, 4	CSI-RS		SSB	
N_{oc} Note 2	dBm/SCS	1, 4	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1, 4	-98			
		2				
		3				
$\hat{E}_s / I_{ot}$	dB	1, 4	4	-1.46	-Infinity	-1.46
		2				
		3				
$\hat{E}_s / N_{oc}$	dB	1, 4	4	4	-Infinity	4
		2				
		3				
SS-RSRP Note 3	dBm/SCS kHz	1, 4	-94	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1, 4	-64.60	-62.25	--64.60	-62.25
	dBm/9.36 MHz	2	-64.60	-62.25	--64.60	-62.25
	dBm/18.36 MHz	3	-61.68	-59.34	-61.68	-59.34
Propagation Condition		1, 2, 3, 4	AWGN			

Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.16.6.1.5.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 800 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to 2xTTIDCCH higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.1.6 SA event triggered reporting tests with per-UE gaps under non-DRX for 2 Rx UE

A.16.6.1.6.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clause 9.2B.6.1 and 9.2B.6.2.

A.16.6.1.6.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for PCell are given in Table A.16.6.1.6.2-1 and A.16.6.1.6.2-2 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

Table A.16.6.1.6.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.16.6.1.6.2-2: General test parameters for SA intra-frequency event triggered reporting with per-UE gaps for PCell in FR1

Parameter	Unit	Test configuration	Value	Comment

Active cell		1, 2, 3, 4	Cell 1	
Neighbour cell		1, 2, 3, 4	Cell 2	Cell to be identified.
RF Channel Number		1, 2, 3, 4	1: Cell 1 and Cell 2	
Measurement gap type		1, 2, 3, 4	Per-UE gaps	
Measurement gap repitition periodicity	ms	1, 2, 3, 4	40	
Measurement gap length	ms	1, 2, 3, 4	6	
Measurement gap offset	ms	1, 2, 3, 4	39	
SSB configuration		1, 2, 4	SSB.1 FR1	
		3	SSB.1 RedCap FR1	
SMTC configuration		1, 4	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
CSI-RS parameters		1, 4	CSI-RS.1.2 FDD resource #0	
		2	CSI-RS.1.2 TDD resource #0	
		3	CSI-RS.2.2 TDD resource #0	
A3-Offset	dB	1, 2, 3, 4	-4.5	
CP length		1, 2, 3, 4	Normal	
Hysteresis	dB	1, 2, 3, 4	0	
Time To Trigger	s	1, 2, 3, 4	0	
Filter coefficient		1, 2, 3, 4	0	L3 filtering is not used
DRX	ms	1, 2, 3, 4		OFF
Time offset between serving and neighbour cells		1, 4	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 μs	Synchronous cells
		3	3 μs	Synchronous cells
T1	s	1, 2, 3, 4	5	
T2	s	1, 2, 3, 4	5	

Table A.16.6.1.6.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting with per-UE gaps for PCell in FR1

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 4	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD		N/A	
		3	CR.2.1 TDD		N/A	
Dedicated CORESET RMC configuration		1, 4	CCR.1.2 FDD		N/A	
		2	CCR.1.2 TDD		N/A	
		3	CCR.2.1 TDD		N/A	
OCNG Patterns		1, 2, 3, 4	OP.1		OP.1	
TRS configuration		1, 4	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD		N/A	

		3	TRS.1.2 TDD		N/A	
Initial BWP configuration		1, 2, 3, 4	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3, 4	DLBWP.1.2		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3, 4	DLBWP.1.2		ULBWP.1.1	
RLM-RS		1, 2, 3, 4	CSI-RS		SSB	
N_{oc} Note 2	dBm/SCS	1, 4	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1, 4	-98			
		2				
		3				
$\hat{E}_s / I_{ot}$	dB	1, 4	4	-1.46	-Infinity	-1.46
		2				
		3				
$\hat{E}_s / N_{oc}$	dB	1, 4	4	4	-Infinity	4
		2				
		3				
SS-RSRP Note 3	dBm/SCS kHz	1, 4	-94	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1, 4	-64.60	-62.25	--64.60	-62.25
	dBm/9.36 MHz	2	-64.60	-62.25	--64.60	-62.25
	dBm/18.36 MHz	3	-61.68	-59.34	-61.68	-59.34
Propagation Condition		1, 2, 3, 4	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.16.6.1.6.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 800 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to 2xTTIDCCH higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.1.7 SA event triggered reporting tests with per-UE gaps under DRX for 1 Rx UE

A.16.6.1.7.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell identification and measurement period requirements in clauses 9.2B.6.1 and 9.2B.6.2.

A.16.6.1.7.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for PCell are given in Table A.16.6.1.7.2-1, A.16.6.1.7.2-2 and A.16.6.1.7.2-3 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furhtermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.16.6.1.7.2-1: Supported test configurations for NR Redcap UE

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode,
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.16.6.1.7.2-2: General test parameters for SA intra-frequency event triggered reporting with per-UE gaps for PCell in FR1 with DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
Active cell		1, 2, 3, 4	Cell 1		
Neighbour cell		1, 2, 3, 4	Cell 2		Cell to be identified.
RF Channel Number		1, 2, 3, 4	1: Cell 1 and Cell 2		
Measurement gap type		1, 2, 3, 4,	Per-UE gaps		
Measurement gap repetition periodicity	ms	1, 2, 3, 4	40		
Measurement gap length	ms	1, 2, 3, 4	6		
Measurement gap offset	ms	1, 2, 3, 4	39		
SSB configuration		1, 4	SSB.1 FR1		
		2	SSB.1 FR1		
		3	SSB.1 RedCap FR1		
SMTC configuration		1, 4	SMTC.1 RedCap FR1		
		2	SMTC.1 RedCap FR1		
		3	SMTC.1 RedCap FR1		
CSI-RS parameters		1, 4	CSI-RS.1.2 FDD resource #0		

		2	CSI-RS.1.2 TDD resource #0		
		3	CSI-RS.2.2 TDD resource #0		
A3-Offset	dB	1, 2, 3, 4	-4.5		
CP length		1, 2, 3, 4	Normal		
Hysteresis	dB	1, 2, 3, 4	0		
Time To Trigger	s	1, 2, 3, 4	0		
Filter coefficient		1, 2, 3, 4	0		L3 filtering is not used
DRX		1, 2, 3, 4	DRX.1	DRX. 7	
Time offset between serving and neighbour cells		1, 4	3 ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 µs		Synchronous cells
		3	3 µs		Synchronous cells
T1	s	1, 2, 3, 4	5		
T2	s	1, 2, 3, 4	5	10	

Table A.16.6.1.7.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting with per-UE gap for PCell in FR1 with DRX

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 4	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD		N/A	
		3	CR.2.1 TDD		N/A	
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD		N/A	
		3	CCR.2.1 TDD		N/A	
OCNG Patterns		1, 2, 3, 4	OP.1		OP.1	
TRS configuration		1, 4	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD		N/A	
		3	TRS.1.2 TDD		N/A	
Initial BWP configuration		1, 2, 3, 4	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3, 4	DLBWP.1.2		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3, 4	ULBWP.1.2		ULBWP.1.1	
RLM-RS		1, 2, 3, 4	CSI-RS		SSB	
N_{oc} Note 2	dBm/SCS	1, 4	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1, 4	-98			
		2				

		3				
$\hat{E}_s/I_{ot}$	dB	1, 4	4	-1.46	-Infinity	-1.46
		2				
		3				
$\hat{E}_s/N_{oc}$	dB	1, 4	4	4	-Infinity	4
		2				
		3				
SS-RSRP Note 3	dBm/SCS kHz	1, 4	-94	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1, 4	-64.60	-62.25	-64.60	-62.25
	dBm/9.36 MHz	2	-64.60	-62.25	-64.60	-62.25
	dBm/16.36 MHz	3	-61.68	-59.34	-61.68	-59.34
Propagation Condition		1, 2, 3, 4	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.16.6.1.7.3 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 7680 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.1.8 SA event triggered reporting tests with per-UE gaps under DRX for 2 Rx UE

A.16.6.1.8.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell identification and measurement period requirements in clauses 9.2B.6.1 and 9.2B.6.2.

A.16.6.1.8.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for PCell are given in Table A.16.6.1.8.2-1, A.16.6.1.8.2-2 and A.16.6.1.8.2-3 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furhtermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.16.6.1.8.2-1: Supported test configurations for NR Redcap UE

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode,
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.16.6.1.8.2-2: General test parameters for SA intra-frequency event triggered reporting with per-UE gaps for PCell in FR1 with DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
Active cell		1, 2, 3, 4	Cell 1		
Neighbour cell		1, 2, 3, 4	Cell 2		Cell to be identified.
RF Channel Number		1, 2, 3, 4	1: Cell 1 and Cell 2		
Measurement gap type		1, 2, 3, 4,	Per-UE gaps		
Measurement gap repetition periodicity	ms	1, 2, 3, 4	40		
Measurement gap length	ms	1, 2, 3, 4	6		
Measurement gap offset	ms	1, 2, 3, 4	39		
SSB configuration		1, 4	SSB.1 FR1		
		2	SSB.1 FR1		
		3	SSB.1 RedCap FR1		
SMTC configuration		1, 4	SMTC.1 RedCap FR1		
		2	SMTC.1 RedCap FR1		
		3	SMTC.1 RedCap FR1		
CSI-RS parameters		1, 4	CSI-RS.1.2 FDD resource #0		
		2	CSI-RS.1.2 TDD resource #0		
		3	CSI-RS.2.2 TDD resource #0		
A3-Offset	dB	1, 2, 3, 4	-4.5		
CP length		1, 2, 3, 4	Normal		
Hysteresis	dB	1, 2, 3, 4	0		
Time To Trigger	s	1, 2, 3, 4	0		
Filter coefficient		1, 2, 3, 4	0		L3 filtering is not used
DRX		1, 2, 3, 4	DRX.1	DRX. 7	
Time offset between serving and neighbour cells		1, 4	3 ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 μs		Synchronous cells
		3	3 μs		Synchronous cells
T1	s	1, 2, 3, 4	5		
T2	s	1, 2, 3, 4	5	10	

Table A.16.6.1.8.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting with per-UE gap for PCell in FR1 with DRX

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 4	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD		N/A	
		3	CR.2.1 TDD		N/A	
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD		N/A	
		3	CCR.2.1 TDD		N/A	
OCNG Patterns		1, 2, 3, 4	OP.1		OP.1	
TRS configuration		1, 4	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD		N/A	
		3	TRS.1.2 TDD		N/A	
Initial BWP configuration		1, 2, 3, 4	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3, 4	DLBWP.1.2		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3, 4	ULBWP.1.2		ULBWP.1.1	
RLM-RS		1, 2, 3, 4	CSI-RS		SSB	
N_{oc} Note 2	dBm/SCS	1, 4	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1, 4	-98			
		2				
		3				
$\hat{E}_s / I_{ot}$	dB	1, 4	4	-1.46	-Infinity	-1.46
		2				
		3				
$\hat{E}_s / N_{oc}$	dB	1, 4	4	4	-Infinity	4
		2				
		3				
SS-RSRP Note 3	dBm/SCS kHz	1, 4	-94	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1, 4	-64.60	-62.25	-64.60	-62.25
	dBm/9.36 MHz	2	-64.60	-62.25	-64.60	-62.25
	dBm/18.36 MHz	3	-61.68	-59.34	-61.68	-59.34
Propagation Condition		1, 2, 3, 4	AWGN			

Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.16.6.1.8.3 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 6400 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.1.9 SA event triggered reporting tests without gap under non-DRX with SSB index reading for 1 Rx UE

A.16.6.1.9.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the FDD intra-frequency cell search requirements in clause 9.2B.5.1 and 9.2B.5.2.

A.16.6.1.9.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for FDD PCell and neighbour cell are given in Table A.16.6.1.9.2-1 and A.16.6.1.9.2-2 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

Table A.16.6.1.9.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode

Table A.16.6.1.9.2-2: General test parameters for SA intra-frequency event triggered reporting without gap for FDD PCell in FR1 with SSB index reading

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2	Cell 1	
Neighbour cell		1, 2	Cell 2	Cell to be identified.
RF Channel Number		1, 2	1: Cell 1 and Cell 2	

CD-SSB configuration		1, 2	SSB.1 FR1	
NCD-SSB configuration		1,2	SSB.6 RedCap FR1 Note 1	
SMTC configuration for CD-SSB		1, 2	SMTC.2	
SMTC configuration for NCD-SSB		1, 2	SMTC.4 RedCap	
A3-Offset	dB	1, 2	-4.5	
CP length		1, 2	Normal	
Hysteresis	dB	1, 2	0	
Time To Trigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX	ms	1, 2	N/A	OFF
Time offset between serving and neighbour cells		1, 2	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
T1	s	1, 2	5	
T2	s	1, 2	5	
Note 1: NCD-SSB is configured within dedicated RedCap DL BWP.				

Table A.16.6.1.9.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting without gap for FDD PCell in FR1 with SSB index reading

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2	N/A		N/A	
PDSCH RMC configuration		1, 2	SR.1.1 FDD		N/A	
RMSI CORESET RMC configuration		1, 2	CR.1.1 FDD		N/A	
Dedicated CORESET RMC configuration		1, 2	CCR.1.1 FDD		N/A	
OCNG Patterns		1, 2	OP.1		OP.1	
TRS configuration		1, 2	TRS.1.1 FDD		N/A	
IInitial BWP configuration		1, 2	DLBWP.0,1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2	DLBWP.1.3 RedCap Note 4		DLBWP.1.3 RedCap Note 4	
Active UL BWP configuration		1, 2	ULBWP.1.3 RedCap Note 5		ULBWP.1.3 RedCap Note 5	
RLM-RS		1, 2,	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1, 2	-98			
N_{oc} Note 2	dBm/15 kHz	1, 2	-98			
$\hat{E}_s / I_{ot}$	dB	1, 2	4	-1.46	-Infinity	-1.46
$\hat{E}_s / N_{oc}$	dB	1, 2	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS kHz	1, 2	-94	-94	-Infinity	-94
Io	dBm/9.36 MHz	1, 2	-64.60	-62.25	-64.60	-62.25
Propagation Condition		1, 2	AWGN			

Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	The starting PRB index for dedicated DL BWP1 corresponding to CD-SSB PRB index; the starting PRB index for dediacted DL BWP2 corresponding to NCD-SSB PRB index;
Note 5:	The starting PRB index for dedicated UL BWP1 is the same as the starting PRB index for dedicated DL BWP1; the starting PRB index for dedicated UL BWP2 is the same as the starting PRB index for dedicated DL BWP2.

A.16.6.1.9.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1480 ms from the beginning of time period T2. The UE is required to read the neighbour cell SSB index and report the acquired SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.1.10 SA event triggered reporting tests without gap under non-DRX with SSB index reading for 2 Rx UE

A.16.6.1.10.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the FDD intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2.

A.16.6.1.10.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for FDD PCell and neighbour cell are given in Table A.16.6.1.10.2-1 and A.16.6.1.10.2-2 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

Table A.16.6.1.10.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode

Table A.16.6.1.10.2-2: General test parameters for SA intra-frequency event triggered reporting without gap for FDD PCell in FR1 with SSB index reading

Parameter	Unit	Test configuration	Value	Comment

Active cell		1, 2	Cell 1	
Neighbour cell		1, 2	Cell 2	Cell to be identified.
RF Channel Number		1, 2	1: Cell 1 and Cell 2	
CD-SSB configuration		1, 2	SSB.1 FR1	
NCD-SSB configuration		1,2	SSB.6 RedCap FR1 Note 1	
SMTC configuration for CD-SSB		1, 2	SMTC.2 RedCap	
SMTC configuration for NCD-SSB		1, 2	SMTC.4 RedCap	
A3-Offset	dB	1, 2, 3, 4	-4.5	
CP length		1, 2, 3, 4	Normal	
Hysteresis	dB	1, 2, 3, 4	0	
Time To Trigger	s	1, 2, 3, 4	0	
Filter coefficient		1, 2, 3, 4	0	L3 filtering is not used
DRX	ms	1, 2, 3, 4	N/A	OFF
Time offset between serving and neighbour cells		1, 2, 3, 4	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
T1	s	1, 2, 3, 4	5	
T2	s	1, 2, 3, 4	5	
Note 1: NCD-SSB is configured within dedicated RedCap DL BWP.				

Table A.16.6.1.10.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting without gap for FDD PCell in FR1 with SSB index reading

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2	N/A		N/A	
PDSCH RMC configuration		1, 2	SR.1.1 FDD		N/A	
RMSI CORESET RMC configuration		1, 2	CR.1.1 FDD		N/A	
Dedicated CORESET RMC configuration		1, 2	CCR.1.1 FDD		N/A	
OCNG Patterns		1, 2	OP.1		OP.1	
TRS configuration		1, 2	TRS.1.1 FDD		N/A	
IInitial BWP configuration		1, 2	DLBWP.0,1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP2 configuration		1, 2	DLBWP.1.3 RedCap Note 4		DLBWP.1.3 RedCap Note 4	
Active UL BWP2 configuration		1, 2	ULBWP.1.3 RedCap Note 5		ULBWP.1.3 RedCap Note 5	
RLM-RS		1, 2	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1, 2	-98			
N_{oc} Note 2	dBm/15 kHz	1, 2	-98			
$\hat{E}_s / I_{ot}$	dB	1, 2	4	-1.46	-Infinity	-1.46
$\hat{E}_s / N_{oc}$	dB	1, 2	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS kHz	1, 2	-94	-94	-Infinity	-94
Io	dBm/9.36 MHz	1, 2, 4	-64.60	-62.25	-64.60	-62.25
Propagation Condition		1, 2	AWGN			

Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	The starting PRB index for dedicated DL BWP1 corresponding to CD-SSB PRB index; the starting PRB index for dediacted DL BWP2 corresponding to NCD-SSB PRB index;
Note 5:	The starting PRB index for dedicated UL BWP1 is the same as the starting PRB index for dedicated DL BWP1; the starting PRB index for dedicated UL BWP2 is the same as the starting PRB index for dedicated DL BWP2.

A.16.6.1.10.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1240 ms from the beginning of time period T2. The UE is required to read the neighbour cell SSB index and report the acquired SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.1.11 SA event triggered reporting tests with per-UE gaps under non-DRX with SSB index reading for 1 Rx UE

A.16.6.1.11.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell identification and measurement period requirements in clauses 9.2B.6.1 and 9.2B.6.2.

A.16.6.1.11.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for PCell are given in Table A.16.6.1.11.2-1, A.16.6.1.11.2-2 and A.16.6.1.11.2-3 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

Table A.16.6.1.11.2-1: Supported test configurations for NR Redcap UE

Configuration	Description
1	15 kHz SSB SCS, 10 MHz UE bandwidth, HD-FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode

Table A.16.6.1.11.2-2: General test parameters for SA intra-frequency event triggered reporting with per-UE gaps for PCell in FR1 with SSB index reading

Parameter	Unit	Test configuration	Value	Comment
Active cell		1,2	Cell 1	
Neighbour cell		1,2	Cell 2	Cell to be identified.
RF Channel Number		1,2	1: Cell 1 and Cell 2	
Measurement gap type		1,2	Per-UE gaps	
Measurement gap repetition periodicity	ms	1,2	40	
Measurement gap length	ms	1,2	6	
Measurement gap offset	ms	1,2	39	
CD-SSB configuration		1,2	SSB.4 RedCap FR1	
SMTC configuration for CD-SSB		1,2	SMTC.1 RedCap FR1	
CSI-RS parameters		1, 2	CSI-RS.1.2 FDD resource #0	
A3-Offset	dB	1,2	-4.5	
CP length		1,2	Normal	
Hysteresis	dB	1,2	0	
Time To Trigger	s	1,2	0	
Filter coefficient		1,2	0	L3 filtering is not used
DRX		1,2	N/A	OFF
Time offset between serving and neighbour cells		1,2	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
T1	s	1,2	5	
T2	s	1,2	5	

Table A.16.6.1.11.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting with per-UE gap for PCell in FR1 with SSB index reading

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1,2	N/A		N/A	
PDSCH RMC configuration		1,2	SR.1.1 FDD		N/A	
RMSI CORESET RMC configuration		1,2	CR.1.1 FDD		N/A	
Dedicated CORESET RMC configuration		1,2	CCR.1.2 FDD		N/A	
OCNG Patterns		1,2	OP.1		OP.1	
TRS configuration		1,2	TRS.1.1 FDD		N/A	
Initial BWP configuration		1,2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP2 configuration		1,2	DLBWP.1.3 RedCap		DLBWP.1.1	
Active UL BWP2 configuration		1,2	ULBWP.1.3 RedCap		ULBWP.1.1	
RLM-RS		1,2	CSI-RS		SSB	
N_{oc} Note 2	dBm/SCS	1,2	-98			
N_{oc} Note 2	dBm/15 kHz	1,2	-98			

$\hat{E}_s/I_{ot}$	dB	1,2	4	-1.46	-Infinity	-1.46
$\hat{E}_s/N_{oc}$	dB	1,2	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS kHz	1,2	-94	-94	-Infinity	-94
Io	dBm/9.36 MHz	1,2	-64.60	-62.25	-64.60	-62.25
Propagation Condition		1,2	AWGN			
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.16.6.1.11.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1040 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.1.12 SA event triggered reporting tests with per-UE gaps under non-DRX with SSB index reading for 2 Rx UE

A.16.6.1.12.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell identification and measurement period requirements in clauses 9.2B.6.1 and 9.2B.6.2.

A.16.6.1.12.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for PCell are given in Table A.16.6.1.12.2-1, A.16.6.1.12.2-2 and A.16.6.1.12.2-3 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

Table A.16.6.1.12.2-1: Supported test configurations for NR Redcap UE

Configuration	Description
1	15 kHz SSB SCS, 10 MHz RF bandwidth, HD-FDD duplex mode

2	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode

Table A.16.6.1.12.2-2: General test parameters for SA intra-frequency event triggered reporting with per-UE gaps for PCell in FR1 with SSB index reading

Parameter	Unit	Test configuration	Value	Comment
Active cell		1,2	Cell 1	
Neighbour cell		1,2	Cell 2	Cell to be identified.
RF Channel Number		1,2	1: Cell 1 and Cell 2	
Measurement gap type		1,2	Per-UE gaps	
Measurement gap repetition periodicity	ms	1,2	40	
Measurement gap length	ms	1,2	6	
Measurement gap offset	ms	1,2	39	
CD-SSB configuration		1,2	SSB.4 RedCap FR1	
SMTC configuration for CD-SSB		1,2	SMTC.1 RedCap FR1	
CSI-RS parameters		1, 2	CSI-RS.1.2 FDD resource #0	
A3-Offset	dB	1,2	-4.5	
CP length		1,2	Normal	
Hysteresis	dB	1,2	0	
Time To Trigger	s	1,2	0	
Filter coefficient		1,2	0	L3 filtering is not used
DRX		1,2	N/A	OFF
Time offset between serving and neighbour cells		1,2	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
T1	s	1,2	5	
T2	s	1,2	5	

Table A.16.6.1.11.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting with per-UE gap for PCell in FR1 with SSB index reading

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1,2	N/A		N/A	
PDSCH RMC configuration		1,2	SR.1.1 FDD		N/A	
RMSI CORESET RMC configuration		1,2	CR.1.1 FDD		N/A	
Dedicated CORESET RMC configuration		1,2	CCR.1.2 FDD		N/A	
OCNG Patterns		1,2	OP.1		OP.1	
TRS configuration		1,2	TRS.1.1 FDD		N/A	
IInitial BWP configuration		1,2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP2 configuration		1,2	DLBWP.1.3 RedCap		DLBWP.1.1	
Active UL BWP 2 configuration		1,2	ULBWP.1.3 RedCap		ULBWP.1.1	

RLM-RS		1,2	CSI-RS		SSB	
N_{oc} Note 2	dBm/SCS	1,2	-98			
N_{oc} Note 2	dBm/15 kHz	1,2	-98			
$\hat{E}_s/I_{ot}$	dB	1,2	4	-1.46	-Infinity	-1.46
$\hat{E}_s/N_{oc}$	dB	1,2	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS kHz	1,2	-94	-94	-Infinity	-94
Io	dBm/9.36 MHz	1,2	-64.60	-62.25	-64.60	-62.25
Propagation Condition		1,2	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.16.6.1.12.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE is required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.2 Inter-frequency Measurements

A.16.6.2.1 SA event triggered reporting tests for FR1 without SSB time index detection when DRX is used for 1 Rx UE

A.16.6.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3B.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.16A.16.6.2.12.1.1-1, A.16.6.2.12.1.1-2 and A.16.6.2.1.1-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table A.16.6.2.1.1-2 is provided for UE that does not support per-FR gap and in test 3&4 measurement gap pattern configuration #4 as defined in Table A.16.6.2.1.1-2 is provided for UE that supports per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 3&4. Otherwise it is only required to pass test 1&2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.16.6.2.1.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.16.6.2.1.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
NR RF Channel Number		Config 1,2,3,4	1, 2				Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3,4	NR cell 1 (Pcell)				NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4	NR cell2				NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4	0		4		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4	9		9		
A3-Offset	dB	Config 1,2,3,4	-6				
Hysteresis	dB	Config 1,2,3,4	0				
CP length		Config 1,2,3,4	Normal				
TimeToTrigger	s	Config 1,2,3,4	0				
Filter coefficient		Config 1,2,3,4	0				L3 filtering is not used
DRX		Config 1,2,3,4	DRX .1	DRX . 7	DRX .1	DRX . 7	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1,4	3ms				Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3µs				Synchronous cells.
T1	s	Config 1,2,3,4	5				
T2	s	Config 1,2,3,4	1.1	11	1.1	11	

Table A.16.6.2.1.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3,4	1		2	
Duplex mode			Config 1	FDD			
			Config 2,3	TDD			
			Config 4	HD-FDD			
TDD configuration			Config 1	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
$BW_{channel}$		MHz	Config 1,2,4	10: $N_{RB,c}$ = 52			
			Config 3	20: $N_{RB,c}$ = 51			
BWP BW		MHz	Config 1,2,4	10: $N_{RB,c}$ = 52			
			Config 3	20: $N_{RB,c}$ = 51			
BWP configuration	Initial DL BWP		Config 1, 2, 3,4	DLBWP.0.1		NA	
	Initial UL BWP		Config 1, 2, 3,4	ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1,4	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	
			Config 3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3,4	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,4	SR.1.1 FDD		NA	
			Config 2	SR.1.1 TDD		NA	
			Config 3	SR2.1 TDD		NA	
RMSI CORESET Reference Channel			Config 1,4	CR.1.1 FDD		NA	
			Config 2	CR.1.1 TDD		NA	
			Config 3	CR.2.1 TDD		NA	
Dedicated CORESET Reference Channel			Config 1,4	CCR.1.1 FDD		NA	
			Config 2	CCR.1.1 TDD		NA	
			Config 3	CCR.2.1 TDD		NA	
SSB parameters			Config 1,4	SSB.1 FR1		SSB.1 FR1	
			Config 2	SSB.1 RedCap FR1		SSB.1 RedCap FR1	
			Config 3	SSB.1 RedCap FR1		SSB.1 RedCap FR1	
SMTC configuration defined in A.3.11			Config 1,4	SMTC.1 RedCap		SMTC.1 RedCap	
			Config 2, 3	SMTC.1 RedCap		SMTC.1 RedCap	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2,4	15			
			Config 3	30			
EPRE ratio of PSS to SSS			Config 1,2,3,4	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							

EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15 kHz	Config 1,2,3,4	-98		-98	
N_{oc} Note2	dBm/SCS	Config 1,2,4	-98		-98	
		Config 3	-95		-95	
SS-RSRP Note 3	dBm/SCS	Config 1,2,4	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3,4	4	4	-Infinity	7
Io Note3	dBm/9.36MHz	Config 1,2,4	-64.59	-64.59	-70.05	-62.2
	dBm/38.16MHz	Config 3	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3,4	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Table A.16.6.2.1.1-4: DRX-Configuration for SA inter-frequency event triggered reporting without SSB time index detection

Field	Test1&3	Test2&4	Comment
	Value	Value	
drx-onDurationTimer	ms1	ms1	As specified in clause 6.3.2 in TS 38.331 [2]
drx-InactivityTimer	ms1	ms1	
drx-RetransmissionTimerDL	sl1	sl1	
drx-RetransmissionTimerUL	sl1	sl1	
drx-LongCycleStartOffset	ms40	Ms640	
shortDRX	disable	disable	

Table A.16.6.2.1.1-5: *TimeAlignmentTimer* -Configuration SA inter-frequency event triggered reporting without SSB time index detection

Field	Value	Comment

TimeAlignmentTimer	ms500	As specified in clause 6.3.2 in TS 38.331 [2]

A.16.6.2.1.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1200 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 12800 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 3 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1200 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 4 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 12800 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1, 2, 3 and 4 UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.2.2 SA event triggered reporting tests for FR1 without SSB time index detection when DRX is used for 2 Rx UE

A.16.6.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3B.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.16.6.2.22.2.1-1, A.16.6.2.2.1-2 and A.16.6.2.2.1-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table A.16.6.2.2.1-2 is provided for UE that does not support per-FR gap and in test 3&4 measurement gap pattern configuration #4 as defined in Table A.16.6.2.2.1-2 is provided for UE that supports per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 3&4. Otherwise it is only required to pass test 1&2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.16.6.2.2.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description

1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.16.6.2.2.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
NR RF Channel Number		Config 1,2,3,4	1, 2				Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3,4	NR cell 1 (Pcell)				NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4	NR cell2				NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4	0		4		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4	9		9		
A3-Offset	dB	Config 1,2,3,4	-6				
Hysteresis	dB	Config 1,2,3,4	0				
CP length		Config 1,2,3,4	Normal				
TimeToTrigger	s	Config 1,2,3,4	0				
Filter coefficient		Config 1,2,3,4	0				L3 filtering is not used
DRX		Config 1,2,3,4	DRX .1	DRX . 7	DRX .1	DRX . 7	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1,4	3ms				Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs				Synchronous cells.
T1	s	Config 1,2,3,4	5				
T2	s	Config 1,2,3,4	1.1	11	1.1	11	

Table A.16.6.2.2.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2

NR RF Channel Number			Config 1,2,3,4	1	2
Duplex mode			Config 1	FDD	
			Config 2,3	TDD	
			Config 4	HD-FDD	
TDD configuration			Config 1	Not Applicable	
			Config 2	TDDConf.1.1	
			Config 3	TDDConf.2.1	
$BW_{channel}$		MHz	Config 1,2,4	10: $N_{RB,c}$ = 52	
			Config 3	20: $N_{RB,c}$ = 51	
BWP BW		MHz	Config 1,2,4	10: $N_{RB,c}$ = 52	
			Config 3	20: $N_{RB,c}$ = 51	
BWP configuration	Initial DL BWP		Config 1, 2, 3,4	DLBWP.0.1	NA
	Initial UL BWP		Config 1, 2, 3,4	ULBWP.0.1	NA
	Dedicated DL BWP			DLBWP.1.1	NA
	Dedicated UL BWP			ULBWP.1.1	NA
TRS configuration			Config 1,4	TRS.1.1 FDD	NA
			Config 2	TRS.1.1 TDD	NA
			Config 3	TRS.1.2 TDD	NA
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3,4	OP.1	OP.1
PDSCH Reference measurement channel			Config 1,4	SR.1.1 FDD	NA
			Config 2	SR.1.1 TDD	NA
			Config 3	SR2.1 TDD	NA
RMSI CORESET Reference Channel			Config 1,4	CR.1.1 FDD	NA
			Config 2	CR.1.1 TDD	NA
			Config 3	CR.2.1 TDD	NA
Dedicated CORESET Reference Channel			Config 1,4	CCR.1.1 FDD	NA
			Config 2	CCR.1.1 TDD	NA
			Config 3	CCR.2.1 TDD	NA
SSB parameters			Config 1,4	SSB.1 FR1	SSB.1 FR1
			Config 2	SSB.1 RedCap FR1	SSB.1 RedCap FR1
			Config 3	SSB.1 RedCap FR1	SSB.1 RedCap FR1
SMTC configuration defined in A.3.11			Config 1,4	SMTC.1 RedCap	SMTC.1 RedCap
			Config 2, 3	SMTC.1 RedCap	SMTC.1 RedCap
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	15	
			Config 3	30	
EPRE ratio of PSS to SSS			Config 1,2,3	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					

EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15 kHz	Config 1,2,3	-98		-98	
N_{oc} Note2	dBm/SCS	Config 1,2	-98		-98	
		Config 3	-95		-95	
SS-RSRP Note 3	dBm/SCS	Config 1,2	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3	4	4	-Infinity	7
Io Note3	dBm/9.36MHz	Config 1,2	-64.59	-64.59	-70.05	-62.2
	dBm/38.16MHz	Config 3	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Table A.16.6.2.2.1-4: DRX-Configuration for SA inter-frequency event triggered reporting without SSB time index detection

Field	Test1&3	Test2&4	Comment
	Value	Value	
drx-onDurationTimer	ms1	ms1	As specified in clause 6.3.2 in TS 38.331 [2]
drx-InactivityTimer	ms1	ms1	
drx-RetransmissionTimerDL	sl1	sl1	
drx-RetransmissionTimerUL	sl1	sl1	
drx-LongCycleStartOffset	ms40	Ms640	
shortDRX	disable	disable	

Table A.16.6.2.2.1-5: *TimeAlignmentTimer* -Configuration SA inter-frequency event triggered reporting without SSB time index detection

Field	Value	Comment
TimeAlignmentTimer	ms500	As specified in clause 6.3.2 in TS 38.331 [2]

A.16.6.2.2.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1080 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 10240 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 3 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1080 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 4 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 10240 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1, 2, 3 and 4 UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.2.3 SA event triggered reporting tests for FR1 without SSB time index detection when DRX is used for 1 Rx UE

A.16.6.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3B.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.16.6.2.3.1-1, A.16.6.2.3.1-2 and A.16.6.2.3.1-3.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.16.6.2.3.1-2 is provided for UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #4 as defined in Table A.16.6.2.3.1-2 is provided for UE that supports per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 2. Otherwise it is only required to pass test 1.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.16.6.2.3.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.16.6.2.3.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	

NR RF Channel Number		Config 1,2,3,4	1, 2		Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3,4	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4	NR cell2		NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4	0	4	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4	9	9	
SMTC-SSB parameters		Config 1,2,4	SSB.1 FR1		As specified in clause A.3.10.1
		Config 3	SSB.1 RedCap FR1		As specified in clause A.3.10.1
A3-Offset	dB	Config 1,2,3,4	-6		
Hysteresis	dB	Config 1,2,3,4	0		
CP length		Config 1,2,3,4	Normal		
TimeToTrigger	s	Config 1,2,3,4	0		
Filter coefficient		Config 1,2,3,4	0		L3 filtering is not used
DRX		Config 1,2,3,4	OFF		DRX is not used
Time offset between serving and neighbour cells		Config 1,4	3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs		Synchronous cells.
T1	s	Config 1,2,3,4	5		
T2	s	Config 1,2,3,4	1	1	

Table A.16.6.2.3.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number		Config 1,2,3,4	1		2	
Duplex mode		Config 1	FDD			
		Config 2,3	TDD			
		Config 4	HD-FDD			
TDD configuration		Config 1,4	Not Applicable			
		Config 2	TDDConf.1.1			
		Config 3	TDDConf.2.1			
$BW_{channel}$	MHz	Config 1,2,4	10: $N_{RB,c}$ = 52			
		Config 3	20: $N_{RB,c}$ = 51			
BWP BW	MHz	Config 1,2,4	10: $N_{RB,c}$ = 52			
		Config 3	20: $N_{RB,c}$ = 51			

BWP configuration	Initial DL BWP		Config 1, 2, 3, 4	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1,4	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	
			Config 3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3,4	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,4	SR.1.1 FDD			
			Config 2	SR.1.1 TDD			
			Config 3	SR2.1 TDD			
RMSI CORESET Reference Channel			Config 1,4	CR.1.1 FDD			
			Config 2	CR.1.1 TDD			
			Config 3	CR2.1 TDD			
Dedicated CORESET Reference Channel			Config 1,4	CCR.1.1 FDD			
			Config 2	CCR.1.1 TDD			
			Config 3	CCR.2.1 TDD			
SSB parameters			Config 1,2,4	SSB.1 FR1		SSB.1 FR1	
			Config 3	SSB.1 RedCap FR1		SSB.1 RedCap FR1	
SMTC configuration defined in A.3.11			Config 1,4	SMTC.2		SMTC.2	
			Config 2, 3	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2,4	15			
			Config 3	30			
EPRE ratio of PSS to SSS			Config 1,2,3,4	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		dBm/15 kHz		-98		-98	
N_{oc} Note2		dBm/SCS	Config 1,2,4	-98		-98	
			Config 3	-95		-95	
SS-RSRP Note 3		dBm/SCS	Config 1,2,4	-94	-94	-Infinity	-91
			Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$		dB	Config 1,2,3,4	4	4	-Infinity	7

$\hat{E}_s/N_{oc}$	dB	Config 1,2,3,4	4	4	-Infinity	7
Io[Note3]	dBm/9.36MHz	Config 1,2,4	-64.59	-64.59	-70.05	-62.26
	dBm/18.72 MHz	Config 3	-61.68	-61.68	-67.13	-59.34
Propagation Condition		Config 1,2,3,4	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.16.6.2.3.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 760 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2 UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.2.4 SA event triggered reporting tests for FR1 without SSB time index detection when DRX is used for 2 Rx UE

A.16.6.2.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3B.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.16.6.2.4.1-1, A.16.6.2.4.1-2 and A.16.6.2.4.1-3.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.16.6.2.4.1-2 is provided for UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #4 as defined in Table A.16.6.2.4.1-2 is provided for UE that supports per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 2. Otherwise it is only required to pass test 1.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.16.6.2.4.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.16.6.2.4.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1,2,3,4	1, 2		Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3,4	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4	NR cell2		NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4	0	4	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4	9	9	
SMTC-SSB parameters		Config 1,2,4	SSB.1 FR1		As specified in clause A.3.10.1
		Config 3	SSB.1 RedCap FR1		As specified in clause A.3.10.1
A3-Offset	dB	Config 1,2,3,4	-6		
Hysteresis	dB	Config 1,2,3,4	0		
CP length		Config 1,2,3,4	Normal		
TimeToTrigger	s	Config 1,2,3,4	0		
Filter coefficient		Config 1,2,3,4	0		L3 filtering is not used
DRX		Config 1,2,3,4	OFF		DRX is not used
Time offset between serving and neighbour cells		Config 1,4	3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs		Synchronous cells.
T1	s	Config 1,2,3,4	5		
T2	s	Config 1,2,3,4	1	1	

Table A.16.6.2.4.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3,4	1		2	
Duplex mode			Config 1	FDD			
			Config 2,3	TDD			
			Config 4	HD-FDD			
TDD configuration			Config 1,4	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
$BW_{channel}$		MHz	Config 1,2,4	10: $N_{RB,c}$ = 52			
			Config 3	20: $N_{RB,c}$ = 51			
BWP BW		MHz	Config 1,2,4	10: $N_{RB,c}$ = 52			
			Config 3	20: $N_{RB,c}$ = 51			
BWP configuration	Initial DL BWP		Config 1, 2, 3, 4	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1,4	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	
			Config 3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3,4	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,4	SR.1.1 FDD			
			Config 2	SR.1.1 TDD			
			Config 3	SR2.1 TDD			
RMSI CORESET Reference Channel			Config 1,4	CR.1.1 FDD			
			Config 2	CR.1.1 TDD			
			Config 3	CR2.1 TDD			
Dedicated CORESET Reference Channel			Config 1,4	CCR.1.1 FDD			
			Config 2	CCR.1.1 TDD			
			Config 3	CCR.2.1 TDD			
SSB parameters			Config 1,2,4	SSB.1 FR1		SSB.1 FR1	
			Config 3	SSB.1 RedCap FR1		SSB.1 RedCap FR1	
SMTC configuration defined in A.3.11			Config 1,4	SMTC.2		SMTC.2	
			Config 2, 3	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2,4	15			
			Config 3	30			
EPRE ratio of PSS to SSS			Config 1,2,3,4	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							

EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15 kHz		-98		-98	
N_{oc} Note2	dBm/SCS	Config 1,2,4	-98		-98	
		Config 3	-95		-95	
SS-RSRP Note 3	dBm/SCS	Config 1,2,4	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3,4	4	4	-Infinity	7
Io Note3	dBm/9.36MHz	Config 1,2,4	-64.59	-64.59	-70.05	-62.26
	dBm/18.72 MHz	Config 3	-61.68	-61.68	-67.13	-59.34
Propagation Condition		Config 1,2,3,4	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.16.6.2.4.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 760 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2 UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.2.5 SA event triggered reporting tests for FR1 with SSB time index detection when DRX is not used for 1 Rx UE

A.16.6.2.6 SA event triggered reporting tests for FR1 with SSB time index detection when DRX is not used for 2 Rx UE

A.16.6.2.7 SA event triggered reporting tests for FR1 with SSB time index detection when DRX is used for 1 Rx UE

A.16.6.2.7.1 Test Purpose and Environment

The purpose of this test is to verify that 1 Rx RedCap UE makes correct reporting of an event in FR1. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3B.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.16.6.2.7.1-1, A.16.6.2.7.1-2 and A.16.6.2.7.1-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table A.16.6.2.7.1-2 is provided for 1 Rx RedCap UE that does not support per-FR gap and in test 3&4 measurement gap pattern configuration #4 as defined in Table A.16.6.2.7.1-2 is provided for 1 Rx RedCap UE that supports per-FR gap. If the UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 3&4. Otherwise it is only required to pass test 1&2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.16.6.2.7.1-1: SA event triggered reporting tests with SSB index reading for FR1-FR1

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.16.6.2.7.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 with SSB time index detection

Parameter	Unit	Test configuration	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
NR RF Channel Number		Config 1,2,3,4	1, 2				Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3,4	NR cell 1 (Pcell)				NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4	NR cell2				NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4	0		4		As specified in clause 9.1A.2-1.
Measurement gap offset		Config 1,2,3,4	9		9		
A3-Offset	dB	Config 1,2,3,4	-6				
Hysteresis	dB	Config 1,2,3,4	0				

CP length		Config 1,2,3,4	Normal				
TimeToTrigger	s	Config 1,2,3,4	0				
Filter coefficient		Config 1,2,3,4	0				L3 filtering is not used
DRX		Config 1,2,3,4	DRX .1	DRX . 7	DRX .1	DRX . 7	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1,4	3 ms				Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3 μs				Synchronous cells.
T1	s	Config 1,2,3,4	5				
T2	s	Config 1,2,3,4	1.3	13.5	1.3	13.5	

Table A.16.6.2.7.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 with SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3,4	1		2	
Duplex mode			Config 1	FDD			
			Config 2,3	TDD			
			Config 4	HD-FDD			
TDD configuration			Config 1,4	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
$BW_{channel}$		MHz	Config 1,2,4	10: $N_{RB,c}$ = 52			
			Config 3	20: $N_{RB,c}$ = 51			
BWP BW		MHz	Config 1,2,4	10: $N_{RB,c}$ = 52			
			Config 3	20: $N_{RB,c}$ = 51			
BWP configuration	Initial DL BWP		Config 1, 2, 3,4	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1,4	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	
			Config 3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3,4	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,4	SR.1.1 FDD		NA	
			Config 2	SR.1.1 TDD			
			Config 3	SR2.1 TDD			
RMSI CORESET Reference Channel			Config 1,4	CR.1.1 FDD		-	
			Config 2	CR.1.1 TDD			
			Config 3	CR2.1 TDD			
Dedicated CORESET Reference Channel			Config 1,4	CCR.1.1 FDD		-	
			Config 2	CCR.1.1 TDD			
			Config 3	CCR.2.1 TDD			
SSB parameters			Config 1,4	SSB.1 FR1		SSB.5 FR1	
			Config 2	SSB.1 FR1		SSB.5 FR1	
			Config 3	SSB.1 RedCap FR1		SSB.3 RedCap FR1	

SMTC configuration defined in A.3.11		Config 1,4	SMTC.2		SMTC.5	
		Config 2, 3	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2,4	15			
		Config 3	30			
EPRE ratio of PSS to SSS		Config 1,2,3	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15 kHz		-98		-98	
N_{oc} Note2	dBm/SCS	Config 1,2,4	-98		-98	
		Config 3	-95		-95	
SS-RSRP Note 3	dBm/SCS	Config 1,2,4	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3,4	4	4	-Infinity	7
Io Note3	dBm/9.36MHz	Config 1,2,4	-64.59	-64.59	-70.05	-62.26
	dBm/18.36MHz	Config 3	-61.68	-61.68	-67.13	-59.34
Propagation Condition		Config 1,2,3,4	AWGN		AWGN	
Antenna Configuration		Config 1,2,3,4	1x1		1x1	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.16.6.2.7.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1560(=600+360+600) ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 16640(=6400+3840+6400) ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 3 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1560(=600+360+600) ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 4 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 16640(=6400+3840+6400) ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1, 2, 3 and 4 UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.2.8 SA event triggered reporting tests for FR1 with SSB time index detection when DRX is used for 2 Rx UE

A.16.6.2.8.1 Test Purpose and Environment

The purpose of this test is to verify that 2 Rx RedCap UE makes correct reporting of an event in FR1. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.16.6.2.8.1-1, A.16.6.2.8.1-2 and A.16.6.2.8.1-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table A.16.6.2.8.1-2 is provided for 2 Rx RedCap UE that does not support per-FR gap and in test 3&4 measurement gap pattern configuration #4 as defined in Table A.16.6.2.8.1-2 is provided for 2 Rx RedCap UE that supports per-FR gap. If the UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 3&4. Otherwise it is only required to pass test 1&2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.16.6.2.8.1-1: SA event triggered reporting tests with SSB index reading for FR1-FR1

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.16.6.2.8.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 with SSB time index detection

Parameter	Unit	Test configuration	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
NR RF Channel Number		Config 1,2,3,4	1, 2				Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3,4	NR cell 1 (Pcell)				NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4	NR cell2				NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4	0		4		As specified in clause 9.1A.2-1.
Measurement gap offset		Config 1,2,3,4	9		9		
A3-Offset	dB	Config 1,2,3,4	-6				
Hysteresis	dB	Config 1,2,3,4	0				
CP length		Config 1,2,3,4	Normal				
TimeToTrigger	s	Config 1,2,3,4	0				
Filter coefficient		Config 1,2,3,4	0				L3 filtering is not used
DRX		Config 1,2,3,4	DRX .1	DRX . 7	DRX .1	DRX . 7	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1,4	3 ms				Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3 μs				Synchronous cells.
T1	s	Config 1,2,3,4	5				
T2	s	Config 1,2,3,4	1.3	13.5	1.3	13.5	

Table A.16.6.2.8.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 with SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3,4	1		2	
Duplex mode			Config 1	FDD			
			Config 2,3	TDD			
			Config 4	HD-FDD			
TDD configuration			Config 1,4	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
$BW_{channel}$		MHz	Config 1,2,4	10: $N_{RB,c}$ = 52			
			Config 3	20: $N_{RB,c}$ = 51			
BWP BW		MHz	Config 1,2,4	10: $N_{RB,c}$ = 52			
			Config 3	20: $N_{RB,c}$ = 51			
BWP configuration	Initial DL BWP		Config 1, 2, 3,4	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	

TRS configuration		Config 1,4	TRS.1.1 FDD		NA	
		Config 2	TRS.1.1 TDD		NA	
		Config 3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		Config 1,2,3,4	OP.1		OP.1	
PDSCH Reference measurement channel		Config 1,4	SR.1.1 FDD		NA	
		Config 2	SR.1.1 TDD			
		Config 3	SR2.1 TDD			
RMSI CORESET Reference Channel		Config 1,4	CR.1.1 FDD		-	
		Config 2	CR.1.1 TDD			
		Config 3	CR2.1 TDD			
Dedicated CORESET Reference Channel		Config 1,4	CCR.1.1 FDD		-	
		Config 2	CCR.1.1 TDD			
		Config 3	CCR.2.1 TDD			
SSB parameters		Config 1,4	SSB.1 FR1		SSB.5 FR1	
		Config 2	SSB.1 FR1		SSB.5 FR1	
		Config 3	SSB.1 RedCap FR1		SSB.3 RedCap FR1	
SMTC configuration defined in A.3.11		Config 1,4	SMTC.2		SMTC.5	
		Config 2, 3	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2,4	15			
		Config 3	30			
EPRE ratio of PSS to SSS		Config 1,2,3	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15 kHz		-98		-98	
N_{oc} Note2	dBm/SCS	Config 1,2,4	-98		-98	
		Config 3	-95		-95	
SS-RSRP Note 3	dBm/SCS	Config 1,2,4	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3,4	4	4	-Infinity	7
Io Note3	dBm/9.36MHz	Config 1,2,4	-64.59	-64.59	-70.05	-62.26
	dBm/18.36MHz	Config 3	-61.68	-61.68	-67.13	-59.34
Propagation Condition		Config 1,2,3,4	AWGN		AWGN	

Antenna Configuration		Config 1,2,3,4	1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.16.6.2.8.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1280 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 12160 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 3 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1280 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 4 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 12160 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1, 2, 3 and 4 UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.2.9 SA event triggered reporting tests with additional mandatory gap pattern for 1 Rx UE

A.16.6.2.9.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event when mandatory gap pattern with 3ms MGL is configured.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.16.6.2.9.1-1, A.16.6.2.9.1-2 and A.16.6.2.9.1-3.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.16.6.2.9.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.16.6.2.9.1-2: General test parameters for SA inter-frequency event triggered reporting with additional mandatory gap pattern

Parameter	Unit	Test configuration	Value		Comment
			Test 1		
NR RF Channel Number		Config 1,2,3, 4	1, 2		Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3, 4	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3, 4	NR cell2		NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3, 4	3		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3, 4	9		
SMTC-SSB parameters		Config 1, 4	SSB.1 FR1		As specified in clause A.3.10.1
		Config 2	SSB.1 FR1		As specified in clause A.3.10.1
		Config 3	SSB.1 RedCap FR1		As specified in clause A.3.10.1
A3-Offset	dB	Config 1,2,3	-6		
Hysteresis	dB	Config 1,2,3	0		
CP length		Config 1,2,3	Normal		
TimeToTrigger	s	Config 1,2,3	0		
Filter coefficient		Config 1,2,3	0		L3 filtering is not used
DRX		Config 1,2,3	OFF		DRX is not used
Time offset between serving and neighbour cells		Config 1	3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs		Synchronous cells.
T1	s	Config 1,2,3	5		
T2	s	Config 1,2,3	1	1	

Table A.16.6.2.9.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting with additional mandatory gap pattern

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2

NR RF Channel Number			Config 1,2,3, 4	1	2
Duplex mode			Config 1, 4	FDD	
			Config 2,3	TDD	
TDD configuration			Config 1	Not Applicable	
			Config 2	TDDConf.1.1	
			Config 3	TDDConf.2.1	
$BW_{channel}$		MHz	Config 1,2, 4	10: $N_{RB,c}$ = 52	
			Config 3	20: $N_{RB,c}$ = 51	
BWP BW		MHz	Config 1,2, 4	10: $N_{RB,c}$ = 52	
			Config 3	20: $N_{RB,c}$ = 51	
BWP configuration	Initial DL BWP		Config 1, 2, 3, 4	DLBWP.0.1	NA
	Initial UL BWP			ULBWP.0.1	NA
	Dedicated DL BWP			DLBWP.1.1	NA
	Dedicated UL BWP			ULBWP.1.1	NA
TRS configuration			Config 1, 4	TRS.1.1 FDD	NA
			Config 2	TRS.1.1 TDD	NA
			Config 3	TRS.1.2 TDD	NA
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3, 4	OP.1	OP.1
PDSCH Reference measurement channel			Config 1, 4	SR.1.1 FDD	
			Config 2	SR.1.1 TDD	
			Config 3	SR2.1 TDD	
CORESET Reference Channel			Config 1, 4	CR.1.1 FDD	
			Config 2	CR.1.1 TDD	
			Config 3	CR2.1 TDD	
SSB parameters			Config 1, 4	SSB.1 FR1	SSB.5 FR1
			Config 2	SSB.1 FR1	SSB.5 FR1
			Config 3	SSB.1 RedCap FR1	SSB.3 RedCap FR1
SMTC configuration defined in A.3.11			Config 1, 4	SMTC.1	SMTC.4
			Config 2, 3	SMTC.1	SMTC.4
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2, 4	15	
			Config 3	30	
EPRE ratio of PSS to SSS			Config 1,2,3, 4	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS (Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					

N_{oc} Note2	dBm/15 kHz		-98		-98	
N_{oc} Note2	dBm/SCS	Config 1,2, 4	-98		-98	
		Config 3	-95		-95	
SS-RSRP Note 3	dBm/SCS	Config 1,2, 4	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3, 4	4	4	-Infinity	7
Io Note3	dBm/9.36MHz	Config 1,2, 4	-64.59	-64.59	-70.05	-62.26
	dBm/38.16MHz	Config 3	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3, 4	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.16.6.2.9.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1440 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.2.10 SA event triggered reporting tests with additional mandatory gap pattern for 2 Rx UE

A.16.6.2.10.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event when mandatory gap pattern with 3ms MGL is configured.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.16.6.2.10.1-1, A.16.6.2.10.1-2 and A.16.6.2.10.1-3.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.16.6.2.10.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode,
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.16.6.2.10.1-2: General test parameters for SA inter-frequency event triggered reporting with additional mandatory gap pattern

Parameter	Unit	Test configuration	Value		Comment
			Test 1		
NR RF Channel Number		Config 1,2,3, 4	1, 2		Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3, 4	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3, 4	NR cell2		NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3, 4	3		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3, 4	9		
SMTC-SSB parameters		Config 1, 4	SSB.1 FR1		As specified in clause A.3.10.1
		Config 2	SSB.1 FR1		As specified in clause A.3.10.1
		Config 3	SSB.1 RedCap FR1		As specified in clause A.3.10.1
A3-Offset	dB	Config 1,2,3	-6		
Hysteresis	dB	Config 1,2,3	0		
CP length		Config 1,2,3	Normal		
TimeToTrigger	s	Config 1,2,3	0		
Filter coefficient		Config 1,2,3	0		L3 filtering is not used
DRX		Config 1,2,3	OFF		DRX is not used
Time offset between serving and neighbour cells		Config 1	3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs		Synchronous cells.
T1	s	Config 1,2,3	5		
T2	s	Config 1,2,3	1	1	

Table A.16.6.2.10.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting with additional mandatory gap pattern

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2

NR RF Channel Number			Config 1,2,3, 4	1	2
Duplex mode			Config 1, 4	FDD	
			Config 2,3	TDD	
TDD configuration			Config 1	Not Applicable	
			Config 2	TDDConf.1.1	
			Config 3	TDDConf.2.1	
$BW_{channel}$		MHz	Config 1,2, 4	10: $N_{RB,c}$ = 52	
			Config 3	20: $N_{RB,c}$ = 51	
BWP BW		MHz	Config 1,2, 4	10: $N_{RB,c}$ = 52	
			Config 3	20: $N_{RB,c}$ = 51	
BWP configuration	Initial DL BWP		Config 1, 2, 3, 4	DLBWP.0.1	NA
	Initial UL BWP			ULBWP.0.1	NA
	Dedicated DL BWP			DLBWP.1.1	NA
	Dedicated UL BWP			ULBWP.1.1	NA
TRS configuration			Config 1, 4	TRS.1.1 FDD	NA
			Config 2	TRS.1.1 TDD	NA
			Config 3	TRS.1.2 TDD	NA
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3, 4	OP.1	OP.1
PDSCH Reference measurement channel			Config 1, 4	SR.1.1 FDD	
			Config 2	SR.1.1 TDD	
			Config 3	SR2.1 TDD	
CORESET Reference Channel			Config 1, 4	CR.1.1 FDD	
			Config 2	CR.1.1 TDD	
			Config 3	CR2.1 TDD	
SSB parameters			Config 1, 4	SSB.1 FR1	SSB.5 FR1
			Config 2	SSB.1 FR1	SSB.5 FR1
			Config 3	SSB.1 RedCap FR1	SSB.3 RedCap FR1
SMTC configuration defined in A.3.11			Config 1, 4	SMTC.1	SMTC.4
			Config 2, 3	SMTC.1	SMTC.4
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2, 4	15	
			Config 3	30	
EPRE ratio of PSS to SSS			Config 1,2,3, 4	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS (Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					

N_{oc} Note2	dBm/15 kHz		-98		-98	
N_{oc} Note2	dBm/SCS	Config 1,2, 4	-98		-98	
		Config 3	-95		-95	
SS-RSRP Note 3	dBm/SCS	Config 1,2, 4	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3, 4	4	4	-Infinity	7
Io Note3	dBm/9.36MHz	Config 1,2, 4	-64.59	-64.59	-70.05	-62.26
	dBm/38.16MHz	Config 3	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3, 4	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.16.6.2.10.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1280 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.2.11 SA event triggered reporting tests for FR1 when DRX is used for 1 Rx UE

A.16.6.2.11.1 Test Purpose and Environment

The purpose of this test is to verify that the UE which supports interFrequencyMeas-Nogap-r16 makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search without measurement gap requirements in clause 9.3B.7.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on RF channel 2. The SSB of cell 2 is completely within UE's active BWP BW. The RBs containing SSB from cell 1 and cell 2 should be different in frequency location within the cell bandwidth. The test parameters are given in Tables A.16.6.2.11.1-1, A.16.6.2.11.1-2 and A.16.6.2.11.1-3.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.16.6.2.11.1-1: SA event triggered reporting tests when DRX is used for FR1-FR1

Config	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.16.6.2.11.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 when DRX is used

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2,3, 4	1, 2	Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3, 4	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3, 4	NR cell2	NR cell 2 is on NR RF channel number 2.
A3-Offset	dB	Config 1,2,3, 4	-6	
Hysteresis	dB	Config 1,2,3, 4	0	
CP length		Config 1,2,3, 4	Normal	
TimeToTrigger	s	Config 1,2,3, 4	0	
Filter coefficient		Config 1,2,3, 4	0	L3 filtering is not used
DRX		Config 1,2,3, 4	DRX.1	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1, 4	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs	Synchronous cells.
T1	s	Config 1,2,3, 4	5	
T2	s	Config 1,2,3, 4	1	

Table A.16.6.2.11.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 when DRX is used

Parameter	Unit		Cell 1	Cell 2

			Test configuration	T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3,4	1		2	
Duplex mode			Config 1,4	FDD			
			Config 2,3	TDD			
TDD configuration			Config 1,4	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
$BW_{channel}$		MHz	Config 1,2,4	10: $N_{RB,c}$ = 52			
			Config 3	20: $N_{RB,c}$ = 51			
BWP BW		MHz	Config 1,2	10: $N_{RB,c}$ = 52			
			Config 3	20: $N_{RB,c}$ = 51			
BWP configuration	Initial DL BWP		Config 1, 2, 3, 4	DLBWP.0.1		NA	
	Initial UL BWP		Config 1, 2, 3, 4	ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	
			Config 3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3,4	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,4	SR.1.1 FDD		NA	
			Config 2	SR.1.1 TDD		NA	
			Config 3	SR2.1 TDD		NA	
CORESET Reference Channel			Config 1,4	CR.1.1 FDD		NA	
			Config 2	CR.1.1 TDD		NA	
			Config 3	CR2.1 TDD		NA	
SSB parameters			Config 1,4	SSB.1 FR1		SSB.5 FR1	
			Config 2	SSB.1 FR1		SSB.5 FR1	
			Config 3	SSB.1 RedCap FR1		SSB.2 RedCap FR1	
SMTC configuration defined in A.3.11			Config 1,4	SMTC.2		SMTC.5	
			Config 2, 3	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2, 4	15			
			Config 3	30			
EPRE ratio of PSS to SSS			Config 1,2,3,4	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							

EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS (Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15 kHz	Config 1,2,3,4	-98		-98	
N_{oc} Note2	dBm/SCS	Config 1,2,4	-98		-98	
		Config 3	-95		-95	
SS-RSRP Note 3	dBm/SCS	Config 1,2,4	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3,4	4	4	-Infinity	7
Io Note3	dBm/9.36MHz	Config 1,2,4	-64.59	-64.59	-70.05	-62.2
	dBm/38.16MHz	Config 3	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Table A.16.6.2.11.1-4: *TimeAlignmentTimer* -Configuration SA inter-frequency event triggered reporting when DRX is used

Field	Value	Comment
TimeAlignmentTimer	ms500	As specified in clause 6.3.2 in TS 38.331 [2]

A.16.6.2.11.2 Test Requirements

In test config 1, UE is required to report SSB time index. The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1080 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test config 2 and 3, UE is not required to report SSB time index. The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 900 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.2.12 SA event triggered reporting tests for FR1 when DRX is used for 2 Rx UE

A.16.6.2.12.1 Test Purpose and Environment

The purpose of this test is to verify that the UE which supports interFrequencyMeas-Nogap-r16 makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search without measurement gap requirements in clause 9.3B.7.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on RF channel 2. The SSB of cell 2 is completely within UE's active BWP BW. The RBs containing SSB from cell 1 and cell 2 should be different in frequency location within the cell bandwidth. The test parameters are given in Tables A.16.6.2.12.1-1, A.16.6.2.12.1-2 and A.16.6.2.12.1-3.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.16.6.2.12.1-1: SA event triggered reporting tests when DRX is used for FR1-FR1

Config	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.16.6.2.12.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 when DRX is used

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2,3, 4	1, 2	Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3, 4	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3, 4	NR cell2	NR cell 2 is on NR RF channel number 2.
A3-Offset	dB	Config 1,2,3, 4	-6	
Hysteresis	dB	Config 1,2,3, 4	0	
CP length		Config 1,2,3, 4	Normal	
TimeToTrigger	s	Config 1,2,3, 4	0	
Filter coefficient		Config 1,2,3, 4	0	L3 filtering is not used
DRX		Config 1,2,3, 4	DRX.1	As specified in clause A.3.3

Time offset between serving and neighbour cells		Config 1, 4	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs	Synchronous cells.
T1	s	Config 1,2,3, 4	5	
T2	s	Config 1,2,3, 4	1	

Table A.16.6.2.12.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 when DRX is used

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3,4	1		2	
Duplex mode			Config 1,4	FDD			
			Config 2,3	TDD			
TDD configuration			Config 1,4	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
$BW_{channel}$		MHz	Config 1,2,4	10: $N_{RB,c}$ = 52			
			Config 3	20: $N_{RB,c}$ = 51			
BWP BW		MHz	Config 1,2	10: $N_{RB,c}$ = 52			
			Config 3	20: $N_{RB,c}$ = 51			
BWP configuration	Initial DL BWP		Config 1, 2, 3, 4	DLBWP.0.1		NA	
	Initial UL BWP		Config 1, 2, 3, 4	ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	
			Config 3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3,4	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,4	SR.1.1 FDD		NA	
			Config 2	SR.1.1 TDD		NA	
			Config 3	SR2.1 TDD		NA	
CORESET Reference Channel			Config 1,4	CR.1.1 FDD		NA	
			Config 2	CR.1.1 TDD		NA	
			Config 3	CR2.1 TDD		NA	
SSB parameters			Config 1,4	SSB.1 FR1		SSB.5 FR1	
			Config 2	SSB.1 FR1		SSB.5 FR1	
			Config 3	SSB.1 RedCap FR1		SSB.2 RedCap FR1	
SMTC configuration defined in A.3.11			Config 1,4	SMTC.2		SMTC.5	
			Config 2, 3	SMTC.1		SMTC.4	
		kHz	Config 1,2, 4	15			

PDSCH/PDCCH subcarrier spacing		Config 3	30			
EPRE ratio of PSS to SSS		Config 1,2,3,4	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS (Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15 kHz	Config 1,2,3,4	-98		-98	
N_{oc} Note2	dBm/SCS	Config 1,2,4	-98		-98	
		Config 3	-95		-95	
SS-RSRP Note 3	dBm/SCS	Config 1,2,4	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3,4	4	4	-Infinity	7
Io Note3	dBm/9.36MHz	Config 1,2,4	-64.59	-64.59	-70.05	-62.2
	dBm/38.16MHz	Config 3	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Table A.16.6.2.12.1-4: *TimeAlignmentTimer* -Configuration SA inter-frequency event triggered reporting when DRX is used

Field	Value	Comment
TimeAlignmentTimer	ms500	As specified in clause 6.3.2 in TS 38.331 [2]

A.16.6.2.12.2 Test Requirements

In test config 1, UE is required to report SSB time index. The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1080 ms from the beginning of time period T2. The UE shall

not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test config 2 and 3, UE is not required to report SSB time index. The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 900 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.3 Inter-RAT Measurements

A.16.6.3.1 SA NR - E-UTRAN event-triggered reporting in non-DRX in FR1 for 1 Rx UE

A.16.6.3.1.1 Test purpose and Environment

The purpose of this set of tests is to verify that the 1 Rx redcap UE makes correct event-triggered reporting of inter-RAT E-UTRAN measurements when operating in standalone (SA) operation with PCell in FR1. This test shall partly verify the cell search and measurement requirements in Clauses 9.4A.2 and 9.4A.3.

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the NR PCell and Cell 2 is an inter-RAT E-UTRAN neighbour cell. In the measurement control information from the PCell it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) is to be used. Each test consists of two consecutive time periods, with durations T1 and T2, respectively. Prior to the start of time duration T1, the UE shall be fully synchronized to Cell 1 and has detected Cell 2 at least for the 3.84 seconds. Cell 2 becomes undetectable during T1, and becomes detectable again during T2.

Supported test configurations are shown in table A.16.6.3.1.1-1. General test parameters are provided in Table A.16.6.3.1.1-2 below. Test parameters for Cell 1 and Cell 2, valid for both time duration T1 and T2, are provided in Tables A.16.6.3.1.1-3 and A.16.6.3.1.1-4, respectively.

Table A.16.6.3.1.1-1: Supported test configurations in SA inter-RAT E-UTRAN event triggered reporting in non-DRX with PCell in FR1

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6	NR 30kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.6.3.1.1-2: General test parameters for SA inter-RAT E-UTRAN event triggered reporting in non-DRX with PCell in FR1

Parameter	Unit	Value	Comment
NR RF Channel Number		1	1 NR carrier frequency is used in the test
LTE RF Channel Number		1	1 LTE carrier frequency is used in the test
Channel Bandwidth	MHz	As specified in Tables A.16.6.3.1.1-3 and A.16.6.3.1.1-4.	
Active cell		Cell 1	Cell 1 is on RF channel number 1

Neighbour cell		Cell 2	Cell 2 is on RF channel number 1
Gap Pattern Id		0	As specified in Clause Table 9.1.2-1. Per-UE gap pattern.
NR measurement quantity		SS-RSRP	Measurement quantity for Cell 1
Inter-RAT E-UTRAN measurement quantity		RSRP	Measurement quantity for Cell 2
b2-Threshold1	dBm	Note 1	SS-RSRP threshold for SS-RSRP measurement on cell1 for event B2
b2-Threshold2EUTRA	dBm	-95	E-UTRAN RSRP threshold for SS-RSRP measurement on cell1 for event B2
Hysteresis	dB	0	
TimeToTrigger	s	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	OFF
T1	s	5	
T2	s	3	
Note 1: Values are defined in Table A.16.6.3.1.1-3			

Table A.16.6.3.1.1-3: PCell specific test parameters for SA inter-RAT E-UTRA event triggered reporting in non-DRX with PCell in FR1

Parameter		Unit	Configuration	Cell 1	
				T1	T2
RF channel number			1, 2, 3, 4, 5, 6	1	
Duplex mode			1, 3	FDD	
			2, 4, 5, 6	TDD	
TDD Configuration	SCS=15 KHz		2, 5	TDDConf.1.1	
	SCS=30 KHz		3, 6	TDDConf.2.1	
$BW_{channel}$		MHz	1, 4	10: $N_{RB,c}$ = 52 (FDD)	
			2, 5	10: $N_{RB,c}$ = 52(TDD)	
			3, 6	20: $N_{RB,c}$ = 51 (TDD)	
PDSCH reference measurement channel			1, 4	SR.1.1 FDD	
			2, 5	SR.1.1 TDD	
			3, 6	SR.2.1 TDD	
RMSI CORSET reference channel			1, 4	CR.1.1 FDD	
			2, 5	CR.1.1 TDD	
			3, 6	CR.2.1 TDD	
Dedicated CORSET reference channel			1, 4	CCR.1.1 FDD	
			2, 5	CCR.1.1 TDD	
			3, 6	CCR.2.1 TDD	
BWP configurations	Initial DL BWP		1, 2, 3, 4, 5, 6	DLBWP.0.1	
	Dedicated DL BWP		1, 2, 3, 4, 5, 6	DLBWP.1.1	
	Initial UL BWP		1, 2, 3, 4, 5, 6	ULBWP.0.1	
	Dedicated UL BWP		1, 2, 3, 4, 5, 6	ULBWP.1.1	
OCNG pattern[Note1]			1, 2, 3, 4, 5, 6	OP.1	
SMTC configuration			1, 2, 3, 4, 5, 6	SMTC.1 RedCap FR1	
SSB configuration			1, 2, 4, 5	SSB.1 FR1	
			3, 6	SSB.1 RedCap FR1	
CSI-RS for tracking			1, 4	TRS.1.1 FDD	
			2, 5	TRS.1.1 TDD	
			3, 6	TRS.1.2 TDD	

b2-Threshold1	dBm	1, 2, 4, 5	-96	
		3, 6	-93	
EPRE ratio of PSS to SSS	dB	1, 2, 3, 4, 5, 6	0	
EPRE ratio of PBCH_DMRS to SSS				
EPRE ratio of PBCH to PBCH_DMRS				
EPRE ratio of PDCCH_DMRS to SSS				
EPRE ratio of PDCCH to PDCCH_DMRS				
EPRE ratio of PDSCH_DMRS to SSS				
EPRE ratio of PDSCH to PDSCH_DMRS				
EPRE ratio of OCNG DMRS to SSS				
EPRE ratio of OCNG to OCNG DMRS				
N_{oc}[Note2]	dBm/15 KHz	1, 2, 3, 4, 5, 6	-104	
N_{oc}[Note2]	dBm/SCS	1, 2, 4, 5	-104	
		3, 6	-101	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	116	70
$\hat{E}_s/I_{ot}$[Note3]	dB	1, 2, 3, 4, 5, 6	116	70
SS-RSRP[Note3]	dBm/SCS	1, 2, 4, 5	-88	-104
		3, 6	-85	-101
SSB_RP[Note3]	dBm/SCS	1, 2, 4, 5	-88	-104
		3, 6	-85	-101
Io[Note3]	dBm/9.36 MHz	1, 2, 4, 5	-59.94	-73.04
	dBm/38.16 MHz	3, 6	-53.84	-66.93
Propagation condition		1, 2, 3, 4, 5, 6	TDL-C 300ns 100Hz	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x1 Low	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.16.6.3.1.1-4: E-UTRAN neighbour cell specific test parameters for SA inter-RAT E-UTRAN event triggered reporting in non-DRX with PCell in FR1

Parameter	Unit	Configuration	Cell 2	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6	1	
Duplex mode		1, 2, 3	FDD	
		4, 5, 6	TDD	
TDD special subframe configuration[Note1]		4, 5, 6	6	
TDD uplink-downlink configuration[Note1]		4, 5, 6	1	
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters:		1, 2, 3	5 MHz: R.7 FDD 10 MHz: R.3 FDD	

DL Reference Measurement Channel[Note2]			20 MHz: R.6 FDD	
		4, 5, 6	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]		1, 2, 3	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note3]				
OCNG_RB[Note3]				
N_{oc}[Note4]	dBm/15kHz	1, 2, 3, 4, 5, 6	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	-Infinity	17
$\hat{E}_s/I_{ot}$[Note5]	dB	1, 2, 3, 4, 5, 6	-Infinity	17
RSRP[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-87
SCH_RP[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-87
Io[Note5]	dBm/9MHz	1, 2, 3, 4, 5, 6	-76.22+10log ($N_{RB,c}$ /50)	-59.13+10log ($N_{RB,c}$ /50)
Propagation Condition		1, 2, 3, 4, 5, 6	ETU70	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x1 Low	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.16.6.3.1.2 Test Requirements

The UE shall send one Event B2 triggered measurement report for Cell 2 to the PCell, with a measurement reporting delay less than 0.96s from the start of period T2. The measurement reporting delay is defined as the time from the beginning of time period T2 to the moment when the UE sends the measurement report on PUSCH.

The UE shall not send event-triggered measurement reports as long as the reporting criteria is not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

A.16.6.3.2 SA NR - E-UTRAN event-triggered reporting in non-DRX in FR1 for 2 Rx UE

A.16.6.3.2.1 Test purpose and Environment

The purpose of this set of tests is to verify that the 2 Rx redcap UE makes correct event-triggered reporting of inter-RAT E-UTRAN measurements when operating in standalone (SA) operation with PCell in FR1. This test shall partly verify the cell search and measurement requirements in Clauses 9.4A.2 and 9.4A.3.

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the NR PCell and Cell 2 is an inter-RAT E-UTRAN neighbour cell. In the measurement control information from the PCell it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) is to be used. Each test consists of two consecutive time periods, with durations T1 and T2, respectively. Prior to the start of time duration T1, the UE shall be fully synchronized to Cell 1 and has detected Cell 2 at least for the 3.84 seconds. Cell 2 becomes undetectable during T1, and becomes detectable again during T2.

Supported test configurations are shown in table A.16.6.3.2.1-1. General test parameters are provided in Table A.16.6.3.2.1-2 below. Test parameters for Cell 1 and Cell 2, valid for both time duration T1 and T2, are provided in Tables A.16.6.3.2.1-3 and A.16.6.3.2.1-4, respectively.

Table A.16.6.3.2.1-1: Supported test configurations in SA inter-RAT E-UTRAN event triggered reporting in non-DRX with PCell in FR1 for 1 Rx UE

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6	NR 30kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.6.3.2.1-2: General test parameters for SA inter-RAT E-UTRAN event triggered reporting in non-DRX with PCell in FR1

Parameter	Unit	Value	Comment
NR RF Channel Number		1	1 NR carrier frequency is used in the test
LTE RF Channel Number		1	1 LTE carrier frequency is used in the test
Channel Bandwidth	MHz	As specified in Tables A.16.6.3.2.1-3 and A.16.6.3.2.1-4.	
Active cell		Cell 1	Cell 1 is on RF channel number 1
Neighbour cell		Cell 2	Cell 2 is on RF channel number 1
Gap Pattern Id		0	As specified in Clause Table 9.1.2-1. Per-UE gap pattern.
NR measurement quantity		SS-RSRP	Measurement quantity for Cell 1
Inter-RAT E-UTRAN measurement quantity		RSRP	Measurement quantity for Cell 2
b2-Threshold1	dBm	Note 1	SS-RSRP threshold for SS-RSRP measurement on cell1 for event B2

b2-Threshold2EUTRA	dBm	-95	E-UTRAN RSRP threshold for SS-RSRP measurement on cell1 for event B2
Hysteresis	dB	0	
TimeToTrigger	s	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	OFF
T1	s	5	
T2	s	3	
Note 1: Values are defined in Table A.16.6.3.2.1-3			

Table A.16.6.3.1.1-3: PCell specific test parameters for SA inter-RAT E-UTRA event triggered reporting in non-DRX with PCell in FR1

Parameter		Unit	Configuration	Cell 1	
				T1	T2
RF channel number			1, 2, 3, 4, 5, 6	1	
Duplex mode			1, 3	FDD	
			2, 4, 5, 6	TDD	
TDD Configuration	SCS=15 KHz		2, 5	TDDConf.1.1	
	SCS=30 KHz		3, 6	TDDConf.2.1	
$BW_{channel}$		MHz	1, 4	10: $N_{RB,c}$ = 52 (FDD)	
			2, 5	10: $N_{RB,c}$ = 52(TDD)	
			3, 6	20: $N_{RB,c}$ = 51 (TDD)	
PDSCH reference measurement channel			1, 4	SR.1.1 FDD	
			2, 5	SR.1.1 TDD	
			3, 6	SR.2.1 TDD	
RMSI CORSET reference channel			1, 4	CR.1.1 FDD	
			2, 5	CR.1.1 TDD	
			3, 6	CR.2.1 TDD	
Dedicated CORSET reference channel			1, 4	CCR.1.1 FDD	
			2, 5	CCR.1.1 TDD	
			3, 6	CCR.2.1 TDD	
BWP configurations	Initial DL BWP		1, 2, 3, 4, 5, 6	DLBWP.0.1	
	Dedicated DL BWP		1, 2, 3, 4, 5, 6	DLBWP.1.1	
	Initial UL BWP		1, 2, 3, 4, 5, 6	ULBWP.0.1	
	Dedicated UL BWP		1, 2, 3, 4, 5, 6	ULBWP.1.1	
OCNG pattern[Note1]			1, 2, 3, 4, 5, 6	OP.1	
SMTC configuration			1, 2, 3, 4, 5, 6	SMTC.1 RedCap FR1	
SSB configuration			1, 2, 4, 5	SSB.1 FR1	
			3, 6	SSB.1 RedCap FR1	
CSI-RS for tracking			1, 4	TRS.1.1 FDD	
			2, 5	TRS.1.1 TDD	
			3, 6	TRS.1.2 TDD	
b2-Threshold1		dBm	1, 2, 4, 5	-96	
			3, 6	-93	
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4, 5, 6	0	
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					

EPRE ratio of PDSCH_DMRS to SSS				
EPRE ratio of PDSCH to PDSCH_DMRS				
EPRE ratio of OCNG DMRS to SSS				
EPRE ratio of OCNG to OCNG DMRS				
N_{oc}[Note2]	dBm/15 KHz	1, 2, 3, 4, 5, 6	-104	
N_{oc}[Note2]	dBm/SCS	1, 2, 4, 5	-104	
		3, 6	-101	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	116	70
$\hat{E}_s/I_{ot}$[Note3]	dB	1, 2, 3, 4, 5, 6	116	70
SS-RSRP[Note3]	dBm/SCS	1, 2, 4, 5	-88	-104
		3, 6	-85	-101
SSB_RP[Note3]	dBm/SCS	1, 2, 4, 5	-88	-104
		3, 6	-85	-101
Io[Note3]	dBm/9.36 MHz	1, 2, 4, 5	-59.94	-73.04
	dBm/38.16 MHz	3, 6	-53.84	-66.93
Propagation condition		1, 2, 3, 4, 5, 6	TDL-C 300ns 100Hz	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x2 Low	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.16.6.3.2.1-4: E-UTRAN neighbour cell specific test parameters for SA inter-RAT E-UTRAN event triggered reporting in non-DRX with PCell in FR1

Parameter	Unit	Configuration	Cell 2	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6	1	
Duplex mode		1, 2, 3	FDD	
		4, 5, 6	TDD	
TDD special subframe configuration[Note1]		4, 5, 6	6	
TDD uplink-downlink configuration[Note1]		4, 5, 6	1	
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	

		4, 5, 6	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]		1, 2, 3	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note3]				
OCNG_RB[Note3]				
N_{oc}[Note4]	dBm/15kHz	1, 2, 3, 4, 5, 6	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	-Infinity	17
$\hat{E}_s/I_{ot}$[Note5]	dB	1, 2, 3, 4, 5, 6	-Infinity	17
RSRP[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-87
SCH_RP[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-87
Io[Note5]	dBm/9MHz	1, 2, 3, 4, 5, 6	-76.22+10log ($N_{RB,c}$ /50)	-59.13+10log ($N_{RB,c}$ /50)
Propagation Condition		1, 2, 3, 4, 5, 6	ETU70	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x2 Low	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.16.6.3.2.2 Test Requirements

The UE shall send one Event B2 triggered measurement report for Cell 2 to the PCell, with a measurement reporting delay less than 0.48s from the start of period T2. The measurement reporting delay is defined as the time from the beginning of time period T2 to the moment when the UE sends the measurement report on PUSCH.

The UE shall not send event-triggered measurement reports as long as the reporting criteria is not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

A.16.6.3.3 SA NR - E-UTRAN event-triggered reporting in DRX in FR1 for 1 Rx UE

A.16.6.3.3.1 Test purpose and Environment

The purpose of this set of tests is to verify that the 1 Rx redcap UE makes correct event-triggered reporting of inter-RAT E-UTRAN measurements when operating in standalone (SA) operation with PCell in FR1 when DRX is used. This test shall partly verify the cell search and measurement requirements in Clauses 9.4A.2 and 9.4A.3. There are two test cases. In test 1 the UE shall be configured with DRX cycle of 40 ms. In test 2 the UE shall be configured with DRX cycle of 640 ms.

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the NR PCell and Cell 2 is an inter-RAT E-UTRAN neighbour cell. In the measurement control information from the PCell it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) is to be used. Each test consists of two consecutive time periods, with durations T1 and T2, respectively. Prior to the start of time duration T1, the UE shall be fully synchronized to Cell 1 and has detected Cell 2 at least for the 3.84 seconds for test 1 or 12.8 seconds for test 2. Cell 2 becomes undetectable during T1, and becomes detectable again during T2.

In each test the UE shall be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore the UE shall be allocated with PUSCH resource at every DRX cycle.

Supported test configurations are shown in table A.16.6.3.3.1-1. General test parameters are provided in Table A.16.6.3.3.1-2 below. Test parameters for Cell 1 and Cell 2, valid for both time duration T1 and T2, are provided in Tables A.16.6.3.3.1-3 and A.16.6.3.3.1-4, respectively.

Table A.16.6.3.3.1-1: Supported test configurations in SA inter-RAT E-UTRAN event triggered reporting in DRX with PCell in FR1

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6	NR 30kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.6.3.3.1-2: General test parameters for SA inter-RAT E-UTRAN event triggered reporting in DRX with PCell in FR1

Parameter	Unit	Value		Comment
		Test 1	Test 2	
NR RF Channel Number		1		1 NR carrier frequency is used in the test
LTE RF Channel Number		2		1 LTE carrier frequency is used in the test
Channel Bandwidth	MHz	As specified in Tables A.16.6.3.3.1-3 and A.16.6.3.3.1-4.		
Active cell		Cell 1		Cell 1 is on RF channel number 1
Neighbour cell		Cell 2		Cell 2 is on RF channel number 2
Gap Pattern Id		0		As specified in Clause Table 9.1.2-1. Per-UE gap pattern.
NR measurement quantity		SS-RSRP		Measurement quantity for Cell 1
Inter-RAT E-UTRAN measurement quantity		RSRP		Measurement quantity for Cell 2
b2-Threshold1	dBm	Note 1		SS-RSRP threshold for SS-RSRP measurement on cell1 for event B2

b2-Threshold2EUTRA	dBm	-95		E-UTRAN RSRP threshold for SS-RSRP measurement on cell1 for event B2
Hysteresis	dB	0		
TimeToTrigger	s	0		
Filter coefficient		0		L3 filtering is not used
DRX		DRX.1	DRX.7	DRX cycle configurations DRX.1 and DRX. 7 are defined in Table A.3.3.1-1 and Table A.3.3.7-1 respectively.
T1	s	5		
T2	s	3	10	
Note 1: Values are defined in Table A.16.6.3.3.1-3				

Table A.16.6.3.3.1-3: PCell specific test parameters for SA inter-RAT E-UTRA event triggered reporting in DRX with PCell in FR1

Parameter		Unit	Configuration	Cell 1	
				T1	T2
RF channel number			1, 2, 3, 4, 5, 6	1	
Duplex mode			1, 3	FDD	
			2, 4, 5, 6	TDD	
TDD Configuration	SCS=15 KHz		2, 5	TDDConf.1.1	
	SCS=30 KHz		3, 6	TDDConf.2.1	
$BW_{channel}$		MHz	1, 4	10: $N_{RB,c}$ = 52 (FDD)	
			2, 5	10: $N_{RB,c}$ = 52(TDD)	
			3, 6	20: $N_{RB,c}$ = 51 (TDD)	
PDSCH reference measurement channel			1, 4	SR.1.1 FDD	
			2, 5	SR.1.1 TDD	
			3, 6	SR.2.1 TDD	
RMSI CORSET reference channel			1, 4	CR.1.1 FDD	
			2, 5	CR.1.1 TDD	
			3, 6	CR.2.1 TDD	
Dedicated CORSET reference channel			1, 4	CCR.1.1 FDD	
			2, 5	CCR.1.1 TDD	
			3, 6	CCR.2.1 TDD	
BWP configurations	Initial DL BWP		1, 2, 3, 4, 5, 6	DLBWP.0.1	
	Dedicated DL BWP		1, 2, 3, 4, 5, 6	DLBWP.1.1	
	Initial UL BWP		1, 2, 3, 4, 5, 6	ULBWP.0.1	
	Dedicated UL BWP		1, 2, 3, 4, 5, 6	ULBWP.1.1	
OCNG pattern[Note1]			1, 2, 3, 4, 5, 6	OP.1	
SMTC configuration			1, 2, 3, 4, 5, 6	SMTC.1 RedCap FR1	
SSB configuration			1, 2, 4, 5	SSB.1 FR1	
			3, 6	SSB.1 RedCap FR1	
CSI-RS for tracking			1, 4	TRS.1.1 FDD	
			2, 5	TRS.1.1 TDD	
			3, 6	TRS.1.2 TDD	
b2-Threshold1		dBm	1, 2, 4, 5	-96	
			3, 6	-93	
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4, 5, 6	0	
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					

EPRE ratio of PDCCH to PDCCH_DMRS				
EPRE ratio of PDSCH_DMRS to SSS				
EPRE ratio of PDSCH to PDSCH_DMRS				
EPRE ratio of OCNG DMRS to SSS				
EPRE ratio of OCNG to OCNG DMRS				
N_{oc}[Note2]	dBm/15 KHz	1, 2, 3, 4, 5, 6	-104	
N_{oc}[Note2]	dBm/SCS	1, 2, 4, 5	-104	
		3, 6	-101	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	116	70
$\hat{E}_s/I_{ot}$[Note3]	dB	1, 2, 3, 4, 5, 6	116	70
SS-RSRP[Note3]	dBm/SCS	1, 2, 4, 5	-88	-104
		3, 6	-85	-101
SSB_RP[Note3]	dBm/SCS	1, 2, 4, 5	-88	-104
		3, 6	-85	-101
Io[Note3]	dBm/9.36 MHz	1, 2, 4, 5	-59.94	-73.04
	dBm/38.16 MHz	3, 6	-53.84	-66.93
Propagation condition		1, 2, 3, 4, 5, 6	TDL-C 300ns 100Hz	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x1 Low	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.16.6.3.3.1-4: E-UTRAN neighbour cell specific test parameters for SA inter-RAT E-UTRAN event triggered reporting in DRX with PCell in FR1

Parameter	Unit	Configuration	Cell 2	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6	2	
Duplex mode		1, 2, 3	FDD	
		4, 5, 6	TDD	
TDD special subframe configuration[Note1]		4, 5, 6	6	
TDD uplink-downlink configuration[Note1]		4, 5, 6	1	
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters:		1, 2, 3	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	

DL Reference Measurement Channel[Note2]				
		4, 5, 6	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]		1, 2, 3	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note3]				
OCNG_RB[Note3]				
N_{oc}[Note4]	dBm/15kHz	1, 2, 3, 4, 5, 6	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	-Infinity	17
$\hat{E}_s/I_{ot}$[Note5]	dB	1, 2, 3, 4, 5, 6	-Infinity	17
RSRP[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-87
SCH_RP[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-87
Io[Note5]	dBm/9MHz	1, 2, 3, 4, 5, 6	-76.22+10log ($N_{RB,c}$ /50)	-59.13+10log ($N_{RB,c}$ /50)
Propagation Condition		1, 2, 3, 4, 5, 6	ETU70	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x1 Low	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.16.6.3.3.2 Test Requirements

In test 1, the UE shall send one Event B2 triggered measurement report for Cell 2 to the PCell, with a measurement reporting delay less than 0.96s from the start of period T2. The measurement reporting delay is defined as the time from the beginning of time period T2 to the moment when the UE sends the measurement report on PUSCH.

In test 2, the UE shall send one Event B2 triggered measurement report for Cell 2 to the PCell, with a measurement reporting delay less than 6.4s from the start of period T2. The measurement reporting delay is defined as the time from the beginning of time period T2 to the moment when the UE sends the measurement report on PUSCH.

The UE shall not send event-triggered measurement reports as long as the reporting criteria is not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

A.16.6.3.4 SA NR - E-UTRAN event-triggered reporting in DRX in FR1 for 2 Rx UE

A.16.6.3.4.1 Test purpose and Environment

The purpose of this set of tests is to verify that the 2 Rx redcap UE makes correct event-triggered reporting of inter-RAT E-UTRAN measurements when operating in standalone (SA) operation with PCell in FR1 when DRX is used. This test shall partly verify the cell search and measurement requirements in Clauses 9.4A.2 and 9.4A.3. There are two test cases. In test 1 the UE shall be configured with DRX cycle of 40 ms. In test 2 the UE shall be configured with DRX cycle of 640 ms.

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the NR PCell and Cell 2 is an inter-RAT E-UTRAN inter-RAT neighbour cell. In the measurement control information from the PCell it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) is to be used. Each test consists of two consecutive time periods, with durations T1 and T2, respectively. Prior to the start of time duration T1, the UE shall be fully synchronized to Cell 1 and has detected Cell 2 at least for the 3.84 seconds for test 1 or 12.8 seconds for test 2. Cell 2 becomes undetectable during T1, and becomes detectable again during T2.

In each test the UE shall be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore the UE shall be allocated with PUSCH resource at every DRX cycle.

Supported test configurations are shown in table A.16.6.3.4.1-1. General test parameters are provided in Table A.16.6.3.4.1-2 below. Test parameters for Cell 1 and Cell 2, valid for both time duration T1 and T2, are provided in Tables A.16.6.3.4.1-3 and A.16.6.3.4.1-4, respectively.

Table A.16.6.3.4.1-1: Supported test configurations in SA inter-RAT E-UTRAN event triggered reporting in DRX with PCell in FR1

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6	NR 30kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.6.3.4.1-2: General test parameters for SA inter-RAT E-UTRAN event triggered reporting in DRX with PCell in FR1

Parameter	Unit	Value		Comment
		Test 1	Test 2	
NR RF Channel Number		1		1 NR carrier frequency is used in the test
LTE RF Channel Number		1		1 LTE carrier frequency is used in the test
Channel Bandwidth	MHz	As specified in Tables A.16.6.3.4.1-3 and A.16.6.3.4.1-4.		
Active cell		Cell 1		Cell 1 is on RF channel number 1
Neighbour cell		Cell 2		Cell 2 is on RF channel number 2
Gap Pattern Id		0		As specified in Clause Table 9.1.2-1. Per-UE gap pattern.
NR measurement quantity		SS-RSRP		Measurement quantity for Cell 1
Inter-RAT E-UTRAN measurement quantity		RSRP		Measurement quantity for Cell 2

b2-Threshold1	dBm	Note 1		SS-RSRP threshold for SS-RSRP measurement on cell1 for event B2
b2-Threshold2EUTRA	dBm	-95		E-UTRAN RSRP threshold for SS-RSRP measurement on cell1 for event B2
Hysteresis	dB	0		
TimeToTrigger	s	0		
Filter coefficient		0		L3 filtering is not used
DRX		DRX.1	DRX.7	DRX cycle configurations DRX.1 and DRX. 7 are defined in Table A.3.3.1-1 and Table A.3.3.7-1 respectively.
T1	s	5		
T2	s	3	5	
Note 1: Values are defined in Table A.16.6.3.4.1-3				

Table A.16.6.3.4.1-3: PCell specific test parameters for SA inter-RAT E-UTRA event triggered reporting in DRX with PCell in FR1

Parameter		Unit	Configuration	Cell 1	
				T1	T2
RF channel number			1, 2, 3, 4, 5, 6	1	
Duplex mode			1, 3	FDD	
			2, 4, 5, 6	TDD	
TDD Configuration	SCS=15 KHz		2, 5	TDDConf.1.1	
	SCS=30 KHz		3, 6	TDDConf.2.1	
$BW_{channel}$		MHz	1, 4	10: $N_{RB,c}$ = 52 (FDD)	
			2, 5	10: $N_{RB,c}$ = 52(TDD)	
			3, 6	20: $N_{RB,c}$ = 51 (TDD)	
PDSCH reference measurement channel			1, 4	SR.1.1 FDD	
			2, 5	SR.1.1 TDD	
			3, 6	SR.2.1 TDD	
RMSI CORSET reference channel			1, 4	CR.1.1 FDD	
			2, 5	CR.1.1 TDD	
			3, 6	CR.2.1 TDD	
Dedicated CORSET reference channel			1, 4	CCR.1.1 FDD	
			2, 5	CCR.1.1 TDD	
			3, 6	CCR.2.1 TDD	
BWP configurations	Initial DL BWP		1, 2, 3, 4, 5, 6	DLBWP.0.1	
	Dedicated DL BWP		1, 2, 3, 4, 5, 6	DLBWP.1.1	
	Initial UL BWP		1, 2, 3, 4, 5, 6	ULBWP.0.1	
	Dedicated UL BWP		1, 2, 3, 4, 5, 6	ULBWP.1.1	
OCNG pattern[Note1]			1, 2, 3, 4, 5, 6	OP.1	
SMTC configuration			1, 2, 3, 4, 5, 6	SMTC.1 RedCap FR1	
SSB configuration			1, 2, 4, 5	SSB.1 FR1	
			3, 6	SSB.1 RedCap FR1	
CSI-RS for tracking			1, 4	TRS.1.1 FDD	
			2, 5	TRS.1.1 TDD	
			3, 6	TRS.1.2 TDD	
b2-Threshold1		dBm	1, 2, 4, 5	-96	
			3, 6	-93	
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4, 5, 6	0	
EPRE ratio of PBCH_DMRS to SSS					

EPRE ratio of PBCH to PBCH_DMRS				
EPRE ratio of PDCCH_DMRS to SSS				
EPRE ratio of PDCCH to PDCCH_DMRS				
EPRE ratio of PDSCH_DMRS to SSS				
EPRE ratio of PDSCH to PDSCH_DMRS				
EPRE ratio of OCNG DMRS to SSS				
EPRE ratio of OCNG to OCNG DMRS				
N_{oc}[Note2]	dBm/15 KHz	1, 2, 3, 4, 5, 6	-104	
N_{oc}[Note2]	dBm/SCS	1, 2, 4, 5	-104	
		3, 6	-101	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	116	70
$\hat{E}_s/I_{ot}$[Note3]	dB	1, 2, 3, 4, 5, 6	116	70
SS-RSRP[Note3]	dBm/SCS	1, 2, 4, 5	-88	-104
		3, 6	-85	-101
SSB_RP[Note3]	dBm/SCS	1, 2, 4, 5	-88	-104
		3, 6	-85	-101
Io[Note3]	dBm/9.36 MHz	1, 2, 4, 5	-59.94	-73.04
	dBm/38.16 MHz	3, 6	-53.84	-66.93
Propagation condition		1, 2, 3, 4, 5, 6	TDL-C 300ns 100Hz	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x2 Low	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.16.6.3.4.1-4: E-UTRAN neighbour cell specific test parameters for SA inter-RAT E-UTRAN event triggered reporting in DRX with PCell in FR1

Parameter	Unit	Configuration	Cell 2	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6	2	
Duplex mode		1, 2, 3	FDD	
		4, 5, 6	TDD	
TDD special subframe configuration[Note1]		4, 5, 6	6	
TDD uplink-downlink configuration[Note1]		4, 5, 6	1	
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	

PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]		1, 2, 3	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note3]				
OCNG_RB[Note3]				
N_{oc}[Note4]	dBm/15kHz	1, 2, 3, 4, 5, 6	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	-Infinity	17
$\hat{E}_s/I_{ot}$[Note5]	dB	1, 2, 3, 4, 5, 6	-Infinity	17
RSRP[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-87
SCH_RP[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-87
Io[Note5]	dBm/9MHz	1, 2, 3, 4, 5, 6	-76.22+10log ($N_{RB,c}$ /50)	-59.13+10log ($N_{RB,c}$ /50)
Propagation Condition		1, 2, 3, 4, 5, 6	ETU70	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x2 Low	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.16.6.3.4.2 Test Requirements

In test 1, the UE shall send one Event B2 triggered measurement report for Cell 2 to the PCell, with a measurement reporting delay less than 0.48s from the start of period T2. The measurement reporting delay is defined as the time from the beginning of time period T2 to the moment when the UE sends the measurement report on PUSCH.

In test 2, the UE shall send one Event B2 triggered measurement report for Cell 2 to the PCell, with a measurement reporting delay less than 3.2s from the start of period T2. The measurement reporting delay is defined as the time from the beginning of time period T2 to the moment when the UE sends the measurement report on PUSCH.

The UE shall not send event-triggered measurement reports as long as the reporting criteria is not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

A.16.6.4 L1-RSRP measurement for beam reporting

A.16.6.4.1 SSB based L1-RSRP measurement when DRX is not used for 1 Rx UE

A.16.6.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5B.4.1, with the testing configurations for NR cells in Table A.16.6.4.1.1-1.

Table A.16.6.4.1.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.16.6.4.1.2 Test parameters

There is one cells in the test, the FR1 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.16.6.4.1.2-1 and Table A.16.6.4.1.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.16.6.4.1.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~4		freq1
Duplex mode	1		FDD
	2		TDD
	3		TDD
	4		HD-FDD
TDD Configuration	1,4		N/A
	2		TDDConf.1.1
	3		TDDConf.2.1
$BW_{channel}$	1,4	MHz	10: $N_{RB,c}$ = 52
	2		10: $N_{RB,c}$ = 52
	3		20: $N_{RB,c}$ = 51
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2		SR.1.1 TDD
	3		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2		CR.1.1 TDD
	3		CR.2.1 TDD

Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD
	2		CCR.1.1 TDD
	3		CCR.2.1 TDD
SSB configuration	1,4		SSB.3 FR1
	2		SSB.3 FR1
	3		SSB.2 RedCap FR1
OCNG Patterns	1~4		OP.1
Initial BWP Configuration	1~4		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~4		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~4		SMTC.1 RedCap
TRS Configuration	1,4		TRS.1.1 FDD
	2		TRS.1.1 TDD
	3		TRS.1.2 TDD
DRX configuration	1~4		Off
reportConfigType	1~4		periodic
reportQuantity	1~4		ssb-Index-RSRP
Number of reported RS	1~4		2
L1-RSRP reporting period	1~4	slot	80
T1	1~4	s	5
T2	1~4	s	1
EPRE ratio of PSS to SSS	1~4	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~4		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.16.6.4.1.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
N_{oc} Note2	1~4	dBm/15kHz	-94.65			
N_{oc} Note2	1,2,4	dBm/SSB SCS	-94.65			
	3		-91.65			
$\hat{E}_s / I_{ot}$	1~4	dB	0	0	-Infinity	3
SSB RSRP Note3	1,2.4	dBm/SSB SCS	-94.65	-94.65	-Infinity	-91.65
	3		-91.65	-91.65	-Infinity	-88.65
Io Note3	1,2.4	dBm/9.36 MHz	-63.69	-63.69	-66.70	-61.93
	3	dBm/18.36 MHz	-60.77	-60.77	-63.79	-59.02

$\hat{E}_s / N_{oc}$	1~4	dB	0	0	-Infinity	3

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.16.6.4.1.3 Test Requirements

The UE shall send L1-RSRP report every 80 slots. No later than 640ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute accuracy requirement in clause 10.1.19.1.1 and relative accuracy requirement in clause 10.1.19.1.2. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.4.2 SSB based L1-RSRP measurement when DRX is not used for 2 Rx UE

A.16.6.4.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5B.4.1, with the testing configurations for NR cells in Table A.16.6.4.2.1-1.

Table A.16.6.4.2.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.16.6.4.2.2 Test parameters

There is one cells in the test, the FR1 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.16.6.4.2.2-1 and Table A.16.6.4.2.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.16.6.4.2.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~4		freq1
Duplex mode	1		FDD
	2		TDD

	3		TDD
	4		HD-FDD
TDD Configuration	1,4		N/A
	2		TDDConf.1.1
	3		TDDConf.2.1
$BW_{channel}$	1,4	MHz	10: $N_{RB,c}$ = 52
	2		10: $N_{RB,c}$ = 52
	3		20: $N_{RB,c}$ = 51
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2		SR.1.1 TDD
	3		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2		CR.1.1 TDD
	3		CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD
	2		CCR.1.1 TDD
	3		CCR.2.1 TDD
SSB configuration	1,4		SSB.3 FR1
	2		SSB.3 FR1
	3		SSB.2 RedCap FR1
OCNG Patterns	1~4		OP.1
Initial BWP Configuration	1~4		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~4		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~4		SMTC.1 RedCap
TRS Configuration	1,4		TRS.1.1 FDD
	2		TRS.1.1 TDD
	3		TRS.1.2 TDD
DRX configuration	1~4		Off
reportConfigType	1~4		periodic
reportQuantity	1~4		ssb-Index-RSRP
Number of reported RS	1~4		2
L1-RSRP reporting period	1~4	slot	80
T1	1~4	s	5
T2	1~4	s	1
EPRE ratio of PSS to SSS	1~4	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~4		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.16.6.4.2.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
N_{oc} Note2	1~4	dBm/15kHz	-94.65			
N_{oc} Note2	1,2,4	dBm/SSB SCS	-94.65			
	3		-91.65			
$\hat{E}_s / I_{ot}$	1~4	dB	0	0	-Infinity	3
SSB RSRP Note3	1,2	dBm/SSB SCS	-94.65	-94.65	-Infinity	-91.65
	3		-91.65	-91.65	-Infinity	-88.65
Io Note3	1,2,4	dBm/9.36 MHz	-63.69	-63.69	-66.70	-61.93
	3	dBm/18.36 MHz	-60.77	-60.77	-63.79	-59.02
$\hat{E}_s / N_{oc}$	1~4	dB	0	0	-Infinity	3

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.16.6.4.2.3 Test Requirements

The UE shall send L1-RSRP report every 80 slots. No later than 640ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute accuracy requirement in clause 10.1.19.1.1 and relative accuracy requirement in clause 10.1.19.1.2. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.4.3 SSB based L1-RSRP measurement when DRX is used for 1 Rx UE

A.16.6.4.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5B.4.1, with the testing configurations for NR cells in Table A.16.6.4.3.1-1.

Table A.16.6.4.3.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.16.6.4.3.2 Test parameters

There is one cells in the test, the FR1 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.16.6.4.3.2-1 and Table A.16.6.4.3.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.16.6.4.3.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~4		freq1
Duplex mode	1,4		FDD
	2		TDD
	3		TDD
	4		HD-FDD
TDD Configuration	1,4		N/A
	2		TDDConf.1.1
	3		TDDConf.2.1
$BW_{channel}$	1,4	MHz	10: $N_{RB,c}$ = 52
	2		10: $N_{RB,c}$ = 52
	3		20: $N_{RB,c}$ = 51
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2		SR.1.1 TDD
	3		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2		CR.1.1 TDD
	3		CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD
	2		CCR.1.1 TDD
	3		CCR.2.1 TDD
SSB configuration	1,4		SSB.3 FR1
	2		SSB.3 FR1
	3		SSB.2 RedCap FR1
OCNG Patterns	1~4		OP.1
Initial BWP Configuration	1~4		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~4		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~4		SMTC.1 RedCap
TRS Configuration	1,4		TRS.1.1 FDD
	2		TRS.1.1 TDD
	3		TRS.1.2 TDD
DRX configuration	1~4		DRX.3
reportConfigType	1~4		periodic
reportQuantity	1~4		ssb-Index-RSRP
Number of reported RS	1~4		2
L1-RSRP reporting period	1~4	slot	80
T1	1~4	s	5
T2	1~4	s	1
EPRE ratio of PSS to SSS	1~4	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			

EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~4		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.16.6.4.3.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
N_{oc} Note2	1~4	dBm/15kHz	-94.65			
N_{oc} Note2	1,2,4	dBm/SSB SCS	-94.65			
	3		-91.65			
$\hat{E}_s / I_{ot}$	1~4	dB	0	0	-Infinity	3
SSB RSRP Note3	1,2,4	dBm/SSB SCS	-94.65	-94.65	-Infinity	-91.65
	3		-91.65	-91.65	-Infinity	-88.65
Io Note3	1,2,4	dBm/9.36 MHz	-63.69	-63.69	-66.70	-61.93
	3	dBm/18.36 MHz	-60.77	-60.77	-63.79	-59.02
$\hat{E}_s / N_{oc}$	1~4	dB	0	0	-Infinity	3
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.16.6.4.3.3 Test Requirements

The UE shall send L1-RSRP report every 80 slots. No later than 640ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute accuracy requirement in clause 10.1.19.1.1 and relative accuracy requirement in clause 10.1.19.1.2. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.4.4 SSB based L1-RSRP measurement when DRX is used for 2 Rx UE

A.16.6.4.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5B.4.1, with the testing configurations for NR cells in Table A.16.6.4.4.1-1.

Table A.16.6.4.4.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.16.6.4.4.2 Test parameters

There is one cells in the test, the FR1 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.16.6.4.4.2-1 and Table A.16.6.4.4.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.16.6.4.34.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~4		freq1
Duplex mode	1		FDD
	2		TDD
	3		TDD
	4		HD-FDD
TDD Configuration	1,4		N/A
	2		TDDConf.1.1
	3		TDDConf.2.1
$BW_{channel}$	1,4	MHz	10: $N_{RB,c}$ = 52
	2		10: $N_{RB,c}$ = 52
	3		20: $N_{RB,c}$ = 51
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2		SR.1.1 TDD
	3		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2		CR.1.1 TDD
	3		CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD
	2		CCR.1.1 TDD
	3		CCR.2.1 TDD
SSB configuration	1,4		SSB.3 FR1
	2		SSB.3 FR1
	3		SSB.2 RedCap FR1
OCNG Patterns	1~4		OP.1
Initial BWP Configuration	1~4		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~4		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~4		SMTC.1 RedCap
TRS Configuration	1,4		TRS.1.1 FDD

	2		TRS.1.1 TDD
	3		TRS.1.2 TDD
DRX configuration	1~4		DRX.3
reportConfigType	1~4		periodic
reportQuantity	1~4		ssb-Index-RSRP
Number of reported RS	1~4		2
L1-RSRP reporting period	1~4	slot	80
T1	1~4	s	5
T2	1~4	s	1
EPRE ratio of PSS to SSS	1~4	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~4		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.16.6.4.34.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
N_{oc} Note2	1~4	dBm/15kHz	-94.65			
N_{oc} Note2	1,2,4	dBm/SSB SCS	-94.65			
	3		-91.65			
$\hat{E}_s / I_{ot}$	1~4	dB	0	0	-Infinity	3
SSB RSRP Note3	1,2,4	dBm/SSB SCS	-94.65	-94.65	-Infinity	-91.65
	3		-91.65	-91.65	-Infinity	-88.65
Io Note3	1,2,4	dBm/9.36 MHz	-63.69	-63.69	-66.70	-61.93
	3	dBm/18.36 MHz	-60.77	-60.77	-63.79	-59.02
$\hat{E}_s / N_{oc}$	1~4	dB	0	0	-Infinity	3
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.16.6.4.4.3 Test Requirements

The UE shall send L1-RSRP report every 80 slots. No later than 640ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute

accuracy requirement in clause 10.1.19.1.1 and relative accuracy requirement in clause 10.1.19.1.2. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.4.5 CSI-RS based L1-RSRP measurement when DRX is not used for 1 Rx UE

A.16.6.4.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5B.4.2, with the testing configurations for NR cells in Table A.16.6.4.5.1-1.

Table A.16.6.4.5.1-1: Applicable NR configurations for FR1 CSI-RS based L1-RSRP test

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.16.6.4.5.2 Test parameters

There is one cells in the test, the FR1 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.16.6.4.5.2-1 and Table A.16.6.4.5.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the CSI-RS and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-RSRP on aperiodic CSI-RS resources. UE is also configured to measure L1-RSRP based on SSB. After 80ms from the beginning of the test, the DCI trigger comes in slot n (0 for Config 1,2 and 8 for Config 3) of a frame and UE provides the report back based on the reporting configuration as defined in Table A.16.6.4.5.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs.

Table A.16.6.4.5.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~4		freq1
Duplex mode	1		FDD
	2		TDD
	3		TDD
	4		HD-FDD
TDD Configuration	1,4		N/A
	2		TDDConf.1.1
	3		TDDConf.2.1
$BW_{channel}$	1,4	MHz	10: $N_{RB,c}$ = 52
	2		10: $N_{RB,c}$ = 52
	3		20: $N_{RB,c}$ = 51
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2		SR.1.1 TDD

	3		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2		CR.1.1 TDD
	3		CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD
	2		CCR.1.1 TDD
	3		CCR.2.1 TDD
SSB configuration	1,4		SSB.3 FR1
	2		SSB.3 FR1
	3		SSB.2 Redcap FR1
CSI-RS configuration	1,4		CSI-RS 1.3 FDD
	2		CSI-RS 1.3 TDD
	3		CSI-RS 2.3 TDD
OCNG Patterns	1~4		OP.1
TRS Configuration	1,4		TRS.1.1 FDD
	2		TRS.1.1 TDD
	3		TRS.1.2 TDD
Initial BWP Configuration	1~4		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~4		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1,2,4		SMTC.1 Redcap
	3		SMTC.1 Redcap
DRX configuration	1~4		Off
reportConfigType	1~4		aperiodic
reportQuantity	1~4		cri-RSRP
Number of reported RS	1~4		2
qcl-Info	1~4		SSB#0 for resource#0
			SSB#1 for resource#1
reportSlotOffsetList	1~4	slots	8
T1	1~4	s	5
EPRE ratio of PSS to SSS	1~4	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~4		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.16.6.4.5.2-2: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
N_{oc} Note1	1~4	dBm/15kHz	-94.65	
N_{oc} Note1	1,2,4	dBm/SSB SCS	-94.65	
	3		-91.65	
$\hat{E}_s / I_{ot}$	1~4	dB	0	3

CSI-RS RSRP Note2	1,2,4	dBm/SSB SCS	-94.65	-91.65
	3		-91.65	-88.65
Io Note2	1,2,4	dBm/9.36 MHz	-63.69	-61.93
	3	dBm/18.36 MHz	-60.77	-59.02
$\hat{E}_s / N_{oc}$	1~4	dB	0	3
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 2: CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

A.16.6.4.5.3 Test Requirements

After 80ms from the beginning of the test, the UE shall send L1-RSRP report at slot 8 from the reception of DCI triggering the L1-RSRP measurement. The L1-RSRP report shall include the results for both CSI-RS#0 and CSI-RS#1 while meeting the absolute accuracy requirement in clause 10.1.19.2.1 and relative accuracy requirement in clause 10.1.19.2.2.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to 2xTTI_{DCCH} higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.4.6 CSI-RS based L1-RSRP measurement when DRX is not used for 2 Rx UE

A.16.6.4.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5B.4.2, with the testing configurations for NR cells in Table A.16.6.4.6.1-1.

Table A.16.6.4.6.1-1: Applicable NR configurations for FR1 CSI-RS based L1-RSRP test

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.16.6.4.6.2 Test parameters

There is one cells in the test, the FR1 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.16.6.4.6.2-1 and Table A.16.6.4.6.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the CSI-RS and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-RSRP on aperiodic CSI-RS resources. UE is also configured to measure L1-RSRP based on SSB. After 80ms from the beginning of the test, the DCI trigger comes in slot n (0 for Config 1,2 and 8 for Config 3) of a frame and UE provides the report back based on the reporting configuration as defined in Table A.16.6.4.6.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs.

Table A.16.6.4.6.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~4		freq1
Duplex mode	1		FDD
	2		TDD
	3		TDD
	4		HD-FDD
TDD Configuration	1,4		N/A
	2		TDDConf.1.1
	3		TDDConf.2.1
$BW_{channel}$	1,4	MHz	10: $N_{RB,c}$ = 52
	2		10: $N_{RB,c}$ = 52
	3		20: $N_{RB,c}$ = 51
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2		SR.1.1 TDD
	3		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2		CR.1.1 TDD
	3		CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD
	2		CCR.1.1 TDD
	3		CCR.2.1 TDD
SSB configuration	1,4		SSB.3 FR1
	2		SSB.3 FR1
	3		SSB.2 Redcap FR1
CSI-RS configuration	1,4		CSI-RS 1.3 FDD
	2		CSI-RS 1.3 TDD
	3		CSI-RS 2.3 TDD
OCNG Patterns	1~4		OP.1
TRS Configuration	1,4		TRS.1.1 FDD
	2		TRS.1.1 TDD
	3		TRS.1.2 TDD
Initial BWP Configuration	1~4		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~4		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1,2,4		SMTC.1 Redcap
	3		SMTC.1 Redcap
DRX configuration	1~4		Off
reportConfigType	1~4		aperiodic
reportQuantity	1~4		cri-RSRP
Number of reported RS	1~4		2
qcl-Info	1~4		SSB#0 for resource#0
			SSB#1 for resource#1
reportSlotOffsetList	1~4	slots	8
T1	1~4	s	5
EPRE ratio of PSS to SSS	1~4	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			

EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~4		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.16.6.4.6.2-2: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
N_{oc} Note1	1~4	dBm/15kHz	-94.65	
N_{oc} Note1	1,2,4	dBm/SSB SCS	-94.65	
	3		-91.65	
$\hat{E}_s / I_{ot}$	1~4	dB	0	3
CSI-RS RSRP Note2	1,2,4	dBm/SSB SCS	-94.65	-91.65
	3		-91.65	-88.65
Io Note2	1,2,4	dBm/9.36 MHz	-63.69	-61.93
	3	dBm/18.36 MHz	-60.77	-59.02
$\hat{E}_s / N_{oc}$	1~4	dB	0	3
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 2: CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

A.16.6.4.6.3 Test Requirements

After 80ms from the beginning of the test, the UE shall send L1-RSRP report at slot 8 from the reception of DCI triggering the L1-RSRP measurement. The L1-RSRP report shall include the results for both CSI-RS#0 and CSI-RS#1 while meeting the absolute accuracy requirement in clause 10.1.19.2.1 and relative accuracy requirement in clause 10.1.19.2.2.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.4.7 CSI-RS based L1-RSRP measurement when DRX is used for 1 Rx UE

A.16.6.4.7.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5B.4.2, with the testing configurations for NR cells in Table A.16.6.4.7.1-1.

Table A.16.6.4.7.1-1: Applicable NR configurations for FR1 CSI-RS based L1-RSRP test

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode

3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.16.6.4.7.2 Test parameters

There is one cells in the test, the FR1 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.16.6.4.7.2-1 and Table A.16.6.4.7.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the CSI-RS and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-RSRP on aperiodic CSI-RS resources. UE is also configured to measure L1-RSRP based on SSB. After 80ms from the beginning of the test, the DCI trigger comes in slot n (0 for Config 1,2 and 8 for Config 3) of a frame and UE provides the report back based on the reporting configuration as defined in Table A.16.6.4.7.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs.

Table A.16.6.4.7.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~4		freq1
Duplex mode	1		FDD
	2		TDD
	3		TDD
	4		HD-FDD
TDD Configuration	1		N/A
	2		TDDConf.1.1
	3		TDDConf.2.1
$BW_{channel}$	1,4	MHz	10: $N_{RB,c}$ = 52
	2		10: $N_{RB,c}$ = 52
	3		20: $N_{RB,c}$ = 51
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2		SR.1.1 TDD
	3		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2		CR.1.1 TDD
	3		CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD
	2		CCR.1.1 TDD
	3		CCR.2.1 TDD
SSB configuration	1,4		SSB.3 FR1
	2		SSB.3 FR1
	3		SSB.2 Redcap FR1
CSI-RS configuration	1,4		CSI-RS 1.3 FDD
	2		CSI-RS 1.3 TDD
	3		CSI-RS 2.3 TDD
OCNG Patterns	1~4		OP.1
TRS Configuration	1,4		TRS.1.1 FDD
	2		TRS.1.1 TDD
	3		TRS.1.2 TDD
Initial BWP Configuration	1~4		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~4		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1,2,4		SMTC.1 Redcap

	3		SMTC.1 Redcap
DRX configuration	1~4		DRX.3
reportConfigType	1~4		aperiodic
reportQuantity	1~4		cri-RSRP
Number of reported RS	1~4		2
qcl-Info	1~4		SSB#0 for resource#0
			SSB#1 for resource#1
reportSlotOffsetList	1~4	slots	8
T1	1~4	s	5
EPRE ratio of PSS to SSS	1~4	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~4		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.16.6.4.7.2-2: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
N_{oc} Note1	1~4	dBm/15kHz	-94.65	
N_{oc} Note1	1,2,4	dBm/SSB SCS	-94.65	
	3		-91.65	
$\hat{E}_s / I_{ot}$	1~4	dB	0	3
CSI-RS RSRP Note2	1,2,4	dBm/SSB SCS	-94.65	-91.65
	3		-91.65	-88.65
Io Note2	1,2,4	dBm/9.36 MHz	-63.69	-61.93
	3	dBm/18.36 MHz	-60.77	-59.02
$\hat{E}_s / N_{oc}$	1~4	dB	0	3
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 2: CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

A.16.6.4.7.3 Test Requirements

After 80ms from the beginning of the test, the UE shall send L1-RSRP report at slot 8 from the reception of DCI triggering the L1-RSRP measurement. The L1-RSRP report shall include the results for both CSI-RS#0 and CSI-RS#1 while meeting the absolute accuracy requirement in clause 10.1.19.2.1 and relative accuracy requirement in clause 10.1.19.2.2.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.4.8 CSI-RS based L1-RSRP measurement when DRX is used for 2 Rx UE

A.16.6.4.8.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5B.4.2, with the testing configurations for NR cells in Table A.16.6.4.8.1-1.

Table A.16.6.4.8.1-1: Applicable NR configurations for FR1 CSI-RS based L1-RSRP test

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.16.6.4.8.2 Test parameters

There is one cells in the test, the FR1 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.16.6.4.8.2-1 and Table A.16.6.4.8.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the CSI-RS and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-RSRP on aperiodic CSI-RS resources. UE is also configured to measure L1-RSRP based on SSB. After 80ms from the beginning of the test, the DCI trigger comes in slot n (0 for Config 1,2 and 8 for Config 3) of a frame and UE provides the report back based on the reporting configuration as defined in Table A.16.6.4.8.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs.

Table A.16.6.4.8.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~4		freq1
Duplex mode	1		FDD
	2		TDD
	3		TDD
	4		HD-FDD
TDD Configuration	1,4		N/A
	2		TDDConf.1.1
	3		TDDConf.2.1
$BW_{channel}$	1,4	MHz	10: $N_{RB,c}$ = 52
	2		10: $N_{RB,c}$ = 52
	3		20: $N_{RB,c}$ = 51
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2		SR.1.1 TDD
	3		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2		CR.1.1 TDD
	3		CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD

	2		CCR.1.1 TDD
	3		CCR.2.1 TDD
SSB configuration	1,4		SSB.3 FR1
	2		SSB.3 FR1
	3		SSB.2 Redcap FR1
CSI-RS configuration	1,4		CSI-RS 1.3 FDD
	2		CSI-RS 1.3 TDD
	3		CSI-RS 2.3 TDD
OCNG Patterns	1~4		OP.1
TRS Configuration	1		TRS.1.1 FDD
	2		TRS.1.1 TDD
	3		TRS.1.2 TDD
Initial BWP Configuration	1~4		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~4		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1,2,4		SMTC.1 Redcap
	3		SMTC.1 Redcap
DRX configuration	1~4		DRX.3
reportConfigType	1~4		aperiodic
reportQuantity	1~4		cri-RSRP
Number of reported RS	1~4		2
qcl-Info	1~4		SSB#0 for resource#0
			SSB#1 for resource#1
reportSlotOffsetList	1~4	slots	8
T1	1~4	s	5
EPRE ratio of PSS to SSS	1~4	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~4		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.16.6.4.8.2-2: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
N_{oc} Note1	1~4	dBm/15kHz	-94.65	
N_{oc} Note1	1,2,4	dBm/SSB SCS	-94.65	
	3		-91.65	
$\hat{E}_s / I_{ot}$	1~4	dB	0	3
CSI-RS RSRP Note2	1,2,4	dBm/SSB SCS	-94.65	-91.65
	3		-91.65	-88.65
Io Note2	1,2,4	dBm/9.36 MHz	-63.69	-61.93
	3	dBm/18.36 MHz	-60.77	-59.02
$\hat{E}_s / N_{oc}$	1~4	dB	0	3

Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2:	CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.16.6.4.8.3 Test Requirements

After 80ms from the beginning of the test, the UE shall send L1-RSRP report at slot 8 from the reception of DCI triggering the L1-RSRP measurement. The L1-RSRP report shall include the results for both CSI-RS#0 and CSI-RS#1 while meeting the absolute accuracy requirement in clause 10.1.19.2.1 and relative accuracy requirement in clause 10.1.19.2.2.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.7 NR measurements with autonomous gaps

A.16.6.7.1 SA intra-frequency CGI identification of NR neighbor cell in FR1 for 1 Rx UE

A.16.6.7.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of intra-frequency CGI identification of an NR neighbour cell in FR1 with autonomous gaps. This test shall partly verify the measurement requirements in Clause 9.11.

A.16.6.7.1.2 Test Parameters

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the FR1 PCell and Cell 2 is an FR1 neighbour cell on the same frequency as the PCell. The test parameters for PCell and neighbour cell are given in Table A.16.6.7.1.2-2 and A.16.6.7.1.2-2 below. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable. A measurement object is configured for the frequency of the PCell and it is indicated to the UE that event-triggered reporting with Event A3 is used. The UE is expected to detect and send a measurement report with Event A3.

A new RRC message triggering CGI identification shall be sent to the UE during period T2, after the UE has reported Event A3. The RRC message shall create a measurement report configuration with purpose *reportCGI* and *useAutonomousGaps* set to TRUE. The start of T3 is the instant when the last TTI containing the RRC message implying CGI identification is sent to the UE.

The test equipment verifies that potential interruption is carried out correctly by monitoring ACK/NACK sent in PCell during T3 untill a measurement report with CGI is sent.

Table A.16.6.7.1.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.16.6.7.1.2-2: General test parameters for SA intra-frequency CGI identification of NR neighbor cell in FR1

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3, 4	Cell 1	
Neighbour cell		1, 2, 3, 4	Cell 2	Cell to be identified.
RF Channel Number		1, 2, 3, 4	1: Cell 1 and Cell 2	
SSB configuration		1, 4	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.1 RedCap FR1	
SMTC configuration		1, 4	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
A3-Offset	dB	1, 2, 3, 4	-4.5	
CP length		1, 2, 3, 4	Normal	
Hysteresis	dB	1, 2, 3, 4	0	
Time To Trigger	s	1, 2, 3, 4	0	
Filter coefficient		1, 2, 3, 4	0	L3 filtering is not used
DRX		1, 2, 3, 4		OFF
Time offset between serving and neighbour cells		1, 4	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 μs	Synchronous cells
		3	3 μs	Synchronous cells
T1	s	1, 2, 3, 4	5	
T2	s	1, 2, 3, 4	5	
T2	s	1, 2, 3, 4	5	

Table A.16.6.7.1.2-3: NR Cell specific test parameters for SA intra-frequency CGI identification of NR neighbor cell in FR1

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 4	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD		CR.1.1 FDD	
		2	CR.1.1 TDD		CR.1.1 TDD	
		3	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD		CCR.1.1 FDD	
		2	CCR.1.1 TDD		CCR.1.1 TDD	
		3	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns		1, 2, 3, 4	OP.1		OP.1	
TRS Configuration		1, 4	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD		N/A	
		3	TRS.1.2 TDD		N/A	
IInitial BWP configuration		1, 2, 3, 4	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3, 4	DLBWP.1.1		DLBWP.1.1	

Active UL BWP configuration		1, 2, 3, 4	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2, 3, 4	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1, 4	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1	-98			
		2				
		3				
$\hat{E}_s/I_{ot}$	dB	1	4	-1.46	-Infinity	-1.46
		2				
		3				
$\hat{E}_s/N_{oc}$	dB	1	4	4	-Infinity	4
		2				
		3				
SS-RSRP Note 3	dBm/SCS kHz	1, 4	-94	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1, 4	-64.60	-62.25	-64.60	-62.25
	dBm/9.36 MHz	2	-64.60	-62.25	-64.60	-62.25
	dBm/18.36 MHz	3	-61.67	-59.32	-61.67	-59.32
Propagation Condition		1, 2, 3, 4	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.16.6.7.1.3 Test Requirements

The UE shall send a measurement report containing the CGI of cell 2 within 372 ms from the start of time period T3.

Test requirement = RRC Procedure delay + $T_{identify_CGI_redcap}$ + reporting delay

- = 10 + 360 + 2ms from the start of T3
- = 372 ms

The UE shall be scheduled continuously throughout the test. From the start of T3 until 372 ms, the interruption on PCell shall not be more than the values specified for SA in clause 8.2.2.2.14.

The rate of correct events observed during repeated tests shall be at least 90%.

A.16.6.7.2 SA intra-frequency CGI identification of NR neighbor cell in FR1 for 2 Rx UE

A.16.6.7.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of intra-frequency CGI identification of an NR neighbour cell in FR1 with autonomous gaps. This test shall partly verify the measurement requirements in Clause 9.11.

A.16.6.7.2.2 Test Parameters

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the FR1 Pcell and Cell 2 is an FR1 neighbour cell on the same frequency as the Pcell. The test parameters for Pcell and neighbour cell are given in Table A.16.6.7.2.2-2 and A.16.6.7.2.2-2 below. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable. A measurement object is configured for the frequency of the Pcell and it is indicated to the UE that event-triggered reporting with Event A3 is used. The UE is expected to detect and send a measurement report with Event A3.

A new RRC message triggering CGI identification shall be sent to the UE during period T2, after the UE has reported Event A3. The RRC message shall create a measurement report configuration with purpose *reportCGI* and *useAutonomousGaps* set to TRUE. The start of T3 is the instant when the last TTI containing the RRC message implying CGI identification is sent to the UE.

The test equipment verifies that potential interruption is carried out correctly by monitoring ACK/NACK sent in Pcell during T3 untill a measurement report with CGI is sent.

Table A.16.6.7.2.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.16.6.7.2.2-2: General test parameters for SA intra-frequency CGI identification of NR neighbor cell in FR1

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3, 4	Cell 1	
Neighbour cell		1, 2, 3, 4	Cell 2	Cell to be identified.
RF Channel Number		1, 2, 3, 4	1: Cell 1 and Cell 2	
SSB configuration		1, 4	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.1 RedCap FR1	
SMTC configuration		1, 4	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
A3-Offset	dB	1, 2, 3, 4	-4.5	
CP length		1, 2, 3, 4	Normal	
Hysteresis	dB	1, 2, 3, 4	0	
Time To Trigger	s	1, 2, 3, 4	0	
Filter coefficient		1, 2, 3, 4	0	L3 filtering is not used
DRX		1, 2, 3, 4		OFF
Time offset between serving and neighbour cells		1, 4	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 µs	Synchronous cells
		3	3 µs	Synchronous cells
T1	s	1, 2, 3, 4	5	
T2	s	1, 2, 3, 4	5	
T2	s	1, 2, 3, 4	5	

Table A.16.6.7.2.2-3: NR Cell specific test parameters for SA intra-frequency CGI identification of NR neighbor cell in FR1

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 4	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD		CR.1.1 FDD	
		2	CR.1.1 TDD		CR.1.1 TDD	
		3	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD		CCR.1.1 FDD	
		2	CCR.1.1 TDD		CCR.1.1 TDD	
		3	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns		1, 2, 3, 4	OP.1		OP.1	
TRS Configuration		1, 4	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD		N/A	
		3	TRS.1.2 TDD		N/A	
IInitial BWP configuration		1, 2, 3, 4	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3, 4	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3, 4	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2, 3, 4	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1, 4	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1, 4	-98			
		2				
		3				
$\hat{E}_s / I_{ot}$	dB	1, 4	4	-1.46	-Infinity	-1.46
		2				
		3				
$\hat{E}_s / N_{oc}$	dB	1, 4	4	4	-Infinity	4
		2				
		3				
SS-RSRP Note 3	dBm/SCS kHz	1, 4	-94	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1, 4	-64.60	-62.25	--64.60	-62.25
	dBm/9.36 MHz	2	-64.60	-62.25	--64.60	-62.25
	dBm/18.36 MHz	3	-61.67	-59.32	-61.67	-59.32
Propagation Condition		1, 2, 3, 4	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.16.6.7.2.3 Test Requirements

The UE shall send a measurement report containing the CGI of cell 2 within 252 ms from the start of time period T3.

Test requirement = RRC Procedure delay + $T_{identify_CGI}$ + reporting delay

- = 10 + 240 + 2ms from the start of T3
- = 252 ms

The UE shall be scheduled continuously throughout the test. From the start of T3 until 252 ms, the interruption on PCell shall not be more than the values specified for SA in clause 8.2.2.2.14.

The rate of correct events observed during repeated tests shall be at least 90%.

A.16.6.7.3 Identification of a new CGI of inter-RAT E-UTRA cell using autonomous gaps in NR SA for 1 Rx UE

A.16.6.7.3.1 Test Purpose and Environment

This test is to verify the requirement for identification of a new CGI of E-UTRA cell with autonomous gaps in NR SA in clause 9.4.7.

The test scenario comprises of one NR carrier and an E-UTRA carrier and two cells as given in tables A.16.6.7.3.1-1, A.16.6.7.3.1-2, A.16.6.7.3.1-3 and A.16.6.7.3.1-4. PDCCHs indicating new transmissions shall be sent continuously to ensure that the UE would have ACK/NACK sending during identifying a new CGI of E-UTRAN cell. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE is expected to detect and send a measurement report.

A RRC message implying SI reading shall be sent to the UE during period T2, after the UE has reported Event B2. The RRC message shall create a measurement report configuration with purpose *reportCGI* and *useAutonomousGaps* set to TRUE. The start of T3 is the instant when the last TTI containing the RRC message implying SI reading is sent to the UE.

Table A.16.6.7.3.1-1: Supported test configurations of inter-RAT E-UTRAN cell using autonomous gap in SA

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE TDD
7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE FDD
8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.6.7.3.1-2: General test parameters for identification of a new CGI of inter-RAT E-UTRA cell using autonomous gaps in NR SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1	1 NR carrier frequency is used in the test

LTE RF Channel Number		2	1 LTE carrier frequency is used in the test
Active cell		Cell 1	
Neighbour cell		Cell 2	Cell to be identified.
LTE Channel Bandwidth	MHz	10	
LTE PDSCH/PCFICH/PDCCH/PHICH parameters			As specified in clause A.3.7.2.1
CP length		Normal	
Hysteresis	dB	0	
Time To Trigger	s	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	
useAutonomousGaps		TRUE	As specified in clause 5.5.3.1 in TS 38.331.
Time offset between cells	ms	3	Asynchronous cells
T1	s	5	
T2	s	≤10	
T3	s	5	

Table A.16.6.7.3.1-3: PCell specific test parameters for identification of a new CGI of inter-RAT E-UTRA cell using autonomous gaps in NR

Parameter		Unit	Configuration	Cell 1		
				T1	T2	T3
RF channel number			1, 2, 3, 4, 5, 6, 7, 8	1		
Duplex mode			1, 2, 3, 7	FDD		
			4, 5, 6, 8	TDD		
TDD Configuration	SCS=15 KHz		2, 5	TDDConf.1.1		
	SCS=30 KHz		3, 6	TDDConf.2.1		
$BW_{channel}$		MHz	1, 4, 7, 8	10: $N_{RB,c}$ = 52 (FDD)		
			2, 5	10: $N_{RB,c}$ = 52 (TDD)		
			3, 6	20: $N_{RB,c}$ = 51 (TDD)		
PDSCH reference measurement channel			1, 4, 7, 8	SR.1.1 FDD		
			2, 5	SR.1.1 TDD		
			3, 6	SR.2.1 TDD		
CORSET reference channel			1, 4, 7, 8	CR.1.1 FDD		
			2, 5	CR.1.1 TDD		
			3, 6	CR.2.1 TDD		
BWP configurations	Initial DL BWP		1, 2, 3, 4, 5, 6, 7, 8	DLBWP.0.1		
	Dedicated DL BWP		1, 2, 3, 4, 5, 6, 7, 8	DLBWP.1.1		
	Initial UL BWP		1, 2, 3, 4, 5, 6, 7, 8	ULBWP.0.1		
	Dedicated UL BWP		1, 2, 3, 4, 5, 6, 7, 8	ULBWP.1.1		
OCNG pattern[Note1]			1, 2, 3, 4, 5, 6, 7, 8	OP.1		
SMTC configuration			1, 2, 3, 4, 5, 6, 7, 8	SMTC.1		
SSB configuration			1, 2, 4, 5, 7, 8	SSB.1 FR1		
			3, 6	SSB.1 RedCap FR1		
b2-Threshold1		dBm	1, 2, 4, 5, 7, 8	-98		
			3, 6	-95		
b2-Threshold2EUTRA		dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-109		
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4, 5, 6, 7, 8	0		
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						

EPRE ratio of PDCCH_DMRS to SSS				
EPRE ratio of PDCCH to PDCCH_DMRS				
EPRE ratio of PDSCH_DMRS to SSS				
EPRE ratio of PDSCH to PDSCH_DMRS				
EPRE ratio of OCNG DMRS to SSS				
EPRE ratio of OCNG to OCNG DMRS				
N_{oc} Note2	dBm/15 KHz	1, 2, 3, 4, 5, 6, 7, 8	-106	
N_{oc} Note2	dBm/SCS	1, 2, 4, 5, 7, 8	-106	
		3, 6	-103	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6, 7, 8	18	-2
$\hat{E}_s/I_{ot}$ Note3	dB	1, 2, 3, 4, 5, 6, 7, 8	18	-2
SS-RSRP Note3	dBm/SCS	1, 2, 4, 5, 7, 8	-88	-108
		3, 6	-85	-105
SSB_RP Note3	dBm/SCS	1, 2, 4, 5, 7, 8	-88	-108
		3, 6	-85	-105
Io Note3	dBm/9.36 MHz	1, 2, 4, 5, 7, 8	-59.98	-75.92
	dBm/18.36 MHz	3, 6	-57.05	-72.99
Propagation condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6, 7, 8	1x1 Low	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.16.6.7.3.1-4: Cell specific test parameters for inter-RAT E-UTRAN cell for identification of a new CGI of E-UTRA cell using autonomous gaps

Parameter	Unit	Configuration	Cell 2		
			T1	T2	T3
RF channel number		1, 2, 3, 4, 5, 6, 7, 8	2		
Duplex mode		1, 2, 3, 7	FDD		
		4, 5, 6, 8	TDD		
TDD special subframe configuration Note1		4, 5, 6, 8	6		
TDD uplink-downlink configuration Note1		4, 5, 6, 8	1		
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6, 7, 8	10 MHz: $N_{RB,c}$ = 50		
PDSCH parameters: DL Reference Measurement Channel Note2		1, 2, 3, 7	10 MHz: R.3 FDD		
		4, 5, 6, 8	10 MHz: R.0 TDD		
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel Note2		1, 2, 3, 7	10 MHz: R.6 FDD		
		4, 5, 6, 8	10 MHz: R.6 TDD		

OCNG Patterns[Note2]		1, 2, 3, 7	10 MHz: OP.10 FDD		
		4, 5, 6, 8	10 MHz: OP.1 TDD		
PBCH_RA PBCH_RB PSS_RA SSS_RA PCFICH_RB PHICH_RA PHICH_RB PDCCH_RA PDCCH_RB PDSCH_RA PDSCH_RB OCNG_RA[Note3] OCNG_RB[Note3]	dB	1, 2, 3, 4, 5, 6, 7, 8	0		
N_{oc}[Note4]	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-106		
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	7	7
$\hat{E}_s/I_{ot}$[Note5]	dB	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	7	7
RSRP[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	-99	-99
SCH_RP[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	-99	-99
Propagation Condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN		
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6, 7, 8	1x1 Low		

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.16.6.7.3.2 Test Requirements

The UE shall transmit a measurement report containing the cell global identifier of cell 2 within 240 milliseconds from the start of T3.

Test requirement = RRC Procedure delay with additional margin + $T_{identify_CGI_LC\text{-}UE}$ + reporting delay

= 15 + 30 + 190 + 2ms from the start of T3

= 237 ms, allow 240 ms.

- The UE shall be scheduled continuously throughout the test, and from the start of T3 until 240 ms at least the number of ACK/NACK specified in NOTE 2 shall be detected as being transmitted by the UE.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE 1: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

NOTE 2: The overall ACK/NACK number is caused by two parts. Firstly, at least X ACK/NACK shall be sent during identifying the cell global identifier of cell 2, where X is defined in Table 8.2.2.2.15-1. Secondly, given that continuous DL data allocation, additional 43, 14 and 34 ACK/NACK shall be sent for FDD/HD-FDD 15 kHz, TDD 15 kHz and TDD 30 kHz, respectively, from the start of T3 until 240 ms excludes 190 ms for identifying the cell global identifier of cell 2.

A.16.6.7.4 Identification of a new CGI of inter-RAT E-UTRA cell using autonomous gaps in NR SA for 2 Rx UE

A.16.6.7.4.1 Test Purpose and Environment

This test is to verify the requirement for identification of a new CGI of E-UTRA cell with autonomous gaps in NR SA in clause 9.4.7.

The test scenario comprises of one NR carrier and an E-UTRA carrier and two cells as given in tables A.16.6.7.4.1-1, A.16.6.7.4.1-2, A.16.6.7.4.1-3 and A.16.6.7.4.1-4. PDCCHs indicating new transmissions shall be sent continuously to ensure that the UE would have ACK/NACK sending during identifying a new CGI of E-UTRAN cell. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE is expected to detect and send a measurement report.

A RRC message implying SI reading shall be sent to the UE during period T2, after the UE has reported Event B2. The RRC message shall create a measurement report configuration with purpose *reportCGI* and *useAutonomousGaps* set to TRUE. The start of T3 is the instant when the last TTI containing the RRC message implying SI reading is sent to the UE.

Table A.16.6.7.4.1-1: Supported test configurations of inter-RAT E-UTRAN cell using autonomous gap in SA

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE TDD
7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE FDD
8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.6.7.4.1-2: General test parameters for identification of a new CGI of inter-RAT E-UTRA cell using autonomous gaps in NR SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1	1 NR carrier frequency is used in the test
LTE RF Channel Number		2	1 LTE carrier frequency is used in the test
Active cell		Cell 1	
Neighbour cell		Cell 2	Cell to be identified.
LTE Channel Bandwidth	MHz	10	
LTE PDSCH/PCFICH/PDCCH/PHICH parameters			As specified in clause A.3.7.2.1
CP length		Normal	
Hysteresis	dB	0	
Time To Trigger	s	0	

Filter coefficient		0	L3 filtering is not used
DRX		OFF	
useAutonomousGaps		TRUE	As specified in clause 5.5.3.1 in TS 38.331.
Time offset between cells	ms	3	Asynchronous cells
T1	s	5	
T2	s	≤10	
T3	s	5	

Table A.16.6.7.4.1-3: PCell specific test parameters for identification of a new CGI of inter-RAT E-UTRA cell using autonomous gaps in NR

Parameter		Unit	Configuration	Cell 1		
				T1	T2	T3
RF channel number			1, 2, 3, 4, 5, 6, 7, 8	1		
Duplex mode			1, 2, 3, 7	FDD		
			4, 5, 6, 8	TDD		
TDD Configuration	SCS=15 KHz		2, 5	TDDConf.1.1		
	SCS=30 KHz		3, 6	TDDConf.2.1		
$BW_{channel}$		MHz	1, 4, 7, 8	10: $N_{RB,c}$ = 52 (FDD)		
			2, 5	10: $N_{RB,c}$ = 52 (TDD)		
			3, 6	20: $N_{RB,c}$ = 51 (TDD)		
PDSCH reference measurement channel			1, 4, 7, 8	SR.1.1 FDD		
			2, 5	SR.1.1 TDD		
			3, 6	SR.2.1 TDD		
CORSET reference channel			1, 4, 7, 8	CR.1.1 FDD		
			2, 5	CR.1.1 TDD		
			3, 6	CR.2.1 TDD		
BWP configurations	Initial DL BWP		1, 2, 3, 4, 5, 6, 7, 8	DLBWP.0.1		
	Dedicated DL BWP		1, 2, 3, 4, 5, 6, 7, 8	DLBWP.1.1		
	Initial UL BWP		1, 2, 3, 4, 5, 6, 7, 8	ULBWP.0.1		
	Dedicated UL BWP		1, 2, 3, 4, 5, 6, 7, 8	ULBWP.1.1		
OCNG pattern[Note1]			1, 2, 3, 4, 5, 6, 7, 8	OP.1		
SMTC configuration			1, 2, 3, 4, 5, 6, 7, 8	SMTC.1		
SSB configuration			1, 2, 4, 5, 7, 8	SSB.1 FR1		
			3, 6	SSB.1 RedCap FR1		
b2-Threshold1		dBm	1, 2, 4, 5, 7, 8	-98		
			3, 6	-95		
b2-Threshold2EUTRA		dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-109		
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4, 5, 6, 7, 8	0		
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						
EPRE ratio of PDCCH to PDCCH_DMRS						
EPRE ratio of PDSCH_DMRS to SSS						
EPRE ratio of PDSCH to PDSCH_DMRS						
EPRE ratio of OCNG DMRS to SSS						
EPRE ratio of OCNG to OCNG DMRS						
N_{oc}[Note2]		dBm/15 KHz	1, 2, 3, 4, 5, 6, 7, 8	-106		

N_{oc}[Note2]	dBm/SCS	1, 2, 4, 5, 7, 8	-106	
		3, 6	-103	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6, 7, 8	18	-2
$\hat{E}_s/I_{ot}$[Note3]	dB	1, 2, 3, 4, 5, 6, 7, 8	18	-2
SS-RSRP[Note3]	dBm/SCS	1, 2, 4, 5, 7, 8	-88	-108
		3, 6	-85	-105
SSB_RP[Note3]	dBm/SCS	1, 2, 4, 5, 7, 8	-88	-108
		3, 6	-85	-105
Io[Note3]	dBm/9.36 MHz	1, 2, 4, 5, 7, 8	-59.98	-75.92
	dBm/18.36 MHz	3, 6	-57.05	-72.99
Propagation condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6, 7, 8	1x2 Low	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.16.6.7.4.1-4: Cell specific test parameters for inter-RAT E-UTRAN cell for identification of a new CGI of E-UTRA cell using autonomous gaps

Parameter	Unit	Configuration	Cell 2		
			T1	T2	T3
RF channel number		1, 2, 3, 4, 5, 6, 7, 8	2		
Duplex mode		1, 2, 3, 7	FDD		
		4, 5, 6, 8	TDD		
TDD special subframe configuration[Note1]		4, 5, 6, 8	6		
TDD uplink-downlink configuration[Note1]		4, 5, 6, 8	1		
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6, 7, 8	10 MHz: $N_{RB,c}$ = 50		
PDSCH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3, 7	10 MHz: R.3 FDD		
		4, 5, 6, 8	10 MHz: R.0 TDD		
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3, 7	10 MHz: R.6 FDD		
		4, 5, 6, 8	10 MHz: R.6 TDD		
OCNG Patterns[Note2]		1, 2, 3, 7	10 MHz: OP.10 FDD		
		4, 5, 6, 8	10 MHz: OP.1 TDD		
PBCH_RA	dB	1, 2, 3, 4, 5, 6, 7, 8	0		
PBCH_RB					
PSS_RA					
SSS_RA					
PCFICH_RB					
PHICH_RA					

PHICH_RB					
PDCCH_RA					
PDCCH_RB					
PDSCH_RA					
PDSCH_RB					
OCNG_RA Note3					
OCNG_RB Note3					
N_{oc} Note4	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-106		
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	7	7
$\hat{E}_s/I_{ot}$ Note5	dB	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	7	7
RSRP Note5	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	-99	-99
SCH_RP Note5	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	-99	-99
Propagation Condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN		
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6, 7, 8	1x2 Low		

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.16.6.7.4.2 Test Requirements

The UE shall transmit a measurement report containing the cell global identifier of cell 2 within 200 milliseconds from the start of T3.

Test requirement = RRC Procedure delay with additional margin + $T_{identify_CGI,E\text{-}UTRAN}$ + reporting delay

= 15 + 30 + 150 + 2ms from the start of T3

= 197 ms, allow 200 ms.

- The UE shall be scheduled continuously throughout the test, and from the start of T3 until 200 ms at least the number of ACK/NACK specified in NOTE 2 shall be detected as being transmitted by the UE.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE 1: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

NOTE 2: The overall ACK/NACK number is caused by two parts. Firstly, at least X ACK/NACK shall be sent during identifying the cell global identifier of cell 2, where X is defined in Table 8.2.2.2.15-1. Secondly, given that continuous DL data allocation, additional 43, 14 and 34 ACK/NACK shall be sent for FDD/HD-FDD 15 kHz, TDD 15 kHz and TDD 30 kHz, respectively, from the start of T3 until 200 ms excludes 150 ms for identifying the cell global identifier of cell 2.

A.16.7 Measurement Performance requirements for RedCap

A.16.7.1 SS-RSRP

A.16.7.1.1 SA: intra-frequency case measurement accuracy with FR1 serving cell and FR1 target cell for 1 Rx UE

A.16.7.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1A.2.1 and 10.1A.2.2 for intra-frequency measurements for 1RX RedCap UE.

A.16.7.1.1.2 Test parameters

In this set of test cases all cells are on the same carrier frequency. Supported test configurations are shown in table A.16.7.1.1.2-1. Both absolute and relative accuracy of SS-RSRP intra-frequency measurements are tested by using the parameters in A.16.7.1.1.2-2. In all test cases, Cell 1 is the PCell, and Cell 2 is the target cell.

Table A.16.7.1.1.2-1: SS-RSRP Intra frequency SS-RSRP supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table A.16.7.1.1.2-2: SS-RSRP Intra frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
Cell ID			489	0	489	0	489	0
SSB ARFCN			freq1		freq1		freq1	
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
	Config 4		HD-FDD					
TDD configuration	Config 1, 4		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
$BW_{channel}$	Config 1, 4	MHz	10: $N_{RB,c}$ = 52					
	Config 2		10: $N_{RB,c}$ = 52					
	Config 3		20: $N_{RB,c}$ = 51					
BWP BW	Config 1, 4		10: $N_{RB,c}$ = 52					
	Config 2		10: $N_{RB,c}$ = 52					
	Config 3		20: $N_{RB,c}$ = 51					
Downlink initial BWP configuration			DLBWP.0.1					
Downlink dedicated BWP configuration			DLBWP.1.1					
Uplink initial BWP configuration			ULBWP.0.1					
Uplink dedicated BWP configuration			ULBWP.1.1					
TRS configuration	Config 1, 4		TRS.1.1 FDD	NA	TRS.1.1 FDD	NA	TRS.1.1 FDD	NA
	Config 2		TRS.1.1 TDD	NA	TRS.1.1 TDD	NA	TRS.1.1 TDD	NA

	Config 3		TRS.1.2 TDD	NA	TRS.1.2 TDD	NA	TRS.1.2 TDD	NA
DRX Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1, 4		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3		SR2.1 TDD		SR2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	-
	Config 2		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
	Config 3		CR2.1 TDD		CR2.1 TDD		CR2.1 TDD	
Control channel RMC	Config 1, 4		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3		CCR2.1 TDD		CCR2.1 TDD		CCR2.1 TDD	
SSB configuration	Config 1, 4		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
	Config 2		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
	Config 3		SSB.1 RedCap FR1	SSB. 1 RedCap FR1	SSB. 1 RedCap FR1	SSB. 1 RedCap FR1	SSB.1 RedCap FR1	SSB.1 RedCap FR1
Time offset with Cell 1	Config 1, 4	ms	-	3	-	3	-	3
	Config 2,3	µs	-	3	-	3	-	3
SMTC configuration	Config 1, 4		SMTC.2					
	Config 2,3		SMTC.1					
OCNG Patterns			OCNG pattern 1					
PDSCH/PDCCH subcarrier spacing	Config 1,2,4	kHz	15 kHz					
	Config 3		30kHz					
EPRE ratio of PSS to SSS		dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} Note2	Config 1,2,4	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/15KhZ	-106		-88		-114
		NR_FDD_FR1_B						-113.5
		NR_TDD_FR1_C						-113
		NR_FDD_FR1_D, NR_TDD_FR1_D						-112.5
		NR_FDD_FR1_E, NR_TDD_FR1_E						-112
		NR_FDD_FR1_F						-111.5
		NR_FDD_FR1_G						-111
		NR_FDD_FR1_H						-110.5

	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		Not applicable[Note 5]		-94		-114	
		NR_FDD_FR1_B						-113.5	
		NR_TDD_FR1_C						-113	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-112.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-112	
		NR_FDD_FR1_F						-111.5	
		NR_FDD_FR1_G						-111	
		NR_FDD_FR1_H						-110.5	
N_{oc} [Note2]	Config 1,2,4		dBm/SCS	-106		-88		Same as Noc/15kHz	
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		Not applicable[Note 5]		-91		-111	
		NR_FDD_FR1_B						-110.5	
		NR_TDD_FR1_C						-110	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-109.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-109	
		NR_FDD_FR1_F						-108.5	
		NR_FDD_FR1_G						-108	
		NR_FDD_FR1_H						-107.5	
$\hat{E}_s/I_{ot}$			dB	2.46	-5.97	2.46	-5.97	-0.01	-4.76
$\hat{E}_s/N_{oc}$			dB	6	1	6	1	3	0
SS-RSRP[Note3]	Config 1,2,4	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/SCS	-100	-105	-82	-87	-111.00	-114.00
		NR_FDD_FR1_B						-110.50	-113.50
		NR_TDD_FR1_C						-110.00	-113.00
		NR_FDD_FR1_D, NR_TDD_FR1_D						-109.50	-112.50
		NR_FDD_FR1_E, NR_TDD_FR1_E						-109.00	-112.00
		NR_FDD_FR1_F						-108.50	-111.50
		NR_FDD_FR1_G						-108.00	-111.00
		NR_FDD_FR1_H						-107.50	-110.50
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		Not applicable[Note 5]	Not applicable[Note 5]	-85	-90	-108.00	-111.00
		NR_FDD_FR1_B						-107.50	-110.50
		NR_TDD_FR1_C						-107.00	-110.00
		NR_FDD_FR1_D, NR_TDD_FR1_D						-106.50	-109.50
		NR_FDD_FR1_E, NR_TDD_FR1_E						-106.00	-109.00
		NR_FDD_FR1_F						-105.50	-108.50

		NR_FDD_FR1_G						- 105.00	- 108.00
		NR_FDD_FR1_H						- 104.50	- 107.50
Io[Note3]	Config 1,2,4	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 9.36MHz	-70.09		-52.09		-80.03	
		NR_FDD_FR1_B						-79.53	
		NR_TDD_FR1_C						-79.03	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-78.53	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-78.03	
		NR_FDD_FR1_F						-77.53	
		NR_FDD_FR1_G						-77.03	
		NR_FDD_FR1_H						-76.53	
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 38.16MHz	Not applicable[Note 5]		-55.18		-77.12	
		NR_FDD_FR1_B						-76.62	
		NR_TDD_FR1_C						-76.12	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-75.62	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-75.12	
		NR_FDD_FR1_F						-74.62	
		NR_FDD_FR1_G						74.12	
		NR_FDD_FR1_H						73.62	
Propagation condition			-	AWGN					
Antenna configuration				1x1					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: Subtest 1 is not used when testing with 30kHz SSB SCS.

Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification

A.16.7.1.1.3 Test Requirements

The SS-RSRP measurement accuracy for cell 1 and cell 2 shall fulfil absolute requirement in clause 10.1A.2.1 and relative requirement in clause 10.1A.2.2 for 1RX RedCap UE.

A.16.7.1.2 SA: intra-frequency case measurement accuracy with FR1 serving cell and FR1 target cell for 2Rx UE

A.16.7.1.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1A.2.1 and 10.1A.2.2 for intra-frequency measurements for 2RX RedCap UE.

A.16.7.1.2.2 Test parameters

In this set of test cases all cells are on the same carrier frequency. Supported test configurations are shown in table A.16.7.1.2.2-1. Both absolute and relative accuracy of SS-RSRP intra-frequency measurements are tested by using the parameters in A.16.7.1.2.2-2. In all test cases, Cell 1 is the PCell, and Cell 2 is the target cell.

Table A.16.7.1.2.2-1: SS-RSRP Intra frequency SS-RSRP supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table A.16.7.1.2.2-2: SS-RSRP Intra frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
Cell ID			489	0	489	0	489	0
SSB ARFCN			freq1		freq1		freq1	
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
	Config 4		HD-FDD					
TDD configuration	Config 1,4		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
$BW_{channel}$	Config 1,4	MHz	10: $N_{RB,c}$ = 52					
	Config 2		10: $N_{RB,c}$ = 52					
	Config 3		20: $N_{RB,c}$ = 51					
BWP BW	Config 1,4		10: $N_{RB,c}$ = 52					
	Config 2		10: $N_{RB,c}$ = 52					
	Config 3		20: $N_{RB,c}$ = 51					
Downlink initial BWP configuration			DLBWP.0.1					
Downlink dedicated BWP configuration			DLBWP.1.1					
Uplink initial BWP configuration			ULBWP.0.1					
Uplink dedicated BWP configuration			ULBWP.1.1					
TRS configuration	Config 1,4		TRS.1.1 FDD	NA	TRS.1.1 FDD	NA	TRS.1.1 FDD	NA
	Config 2		TRS.1.1 TDD	NA	TRS.1.1 TDD	NA	TRS.1.1 TDD	NA
	Config 3		TRS.1.2 TDD	NA	TRS.1.2 TDD	NA	TRS.1.2 TDD	NA
DRX Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3		SR2.1 TDD		SR2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	-
	Config 2		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
	Config 3		CR2.1 TDD		CR2.1 TDD		CR2.1 TDD	

Control channel RMC	Config 1,4		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3		CCR2.1 TDD		CCR2.1 TDD		CCR2.1 TDD	
SSB configuration	Config 1,4		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
	Config 2		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
	Config 3		SSB.1 RedCap FR1	SSB. 1 RedCap FR1	SSB. 1 RedCap FR1	SSB. 1 RedCap FR1	SSB.1 RedCap FR1	SSB.1 RedCap FR1
Time offset with Cell 1	Config 1,4	ms	-	3	-	3	-	3
	Config 2,3	µs	-	3	-	3	-	3
SMTC configuration	Config 1,4		SMTC.2					
	Config 2,3		SMTC.1					
OCNG Patterns			OCNG pattern 1					
PDSCH/PDCCH subcarrier spacing	Config 1,2,4	kHz	15 kHz					
	Config 3		30kHz					
EPRE ratio of PSS to SSS		dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} Note2	Config 1,2,4	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/15KhZ	-106		-88		-114
		NR_FDD_FR1_B						-113.5
		NR_TDD_FR1_C						-113
		NR_FDD_FR1_D, NR_TDD_FR1_D						-112.5
		NR_FDD_FR1_E, NR_TDD_FR1_E						-112
		NR_FDD_FR1_F						-111.5
		NR_FDD_FR1_G						-111
		NR_FDD_FR1_H						-110.5
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		Not applicable Note 5		-94		-114
		NR_FDD_FR1_B						-113.5
		NR_TDD_FR1_C						-113
		NR_FDD_FR1_D, NR_TDD_FR1_D						-112.5
		NR_FDD_FR1_E, NR_TDD_FR1_E						-112
		NR_FDD_FR1_F						-111.5
		NR_FDD_FR1_G						-111
		NR_FDD_FR1_H						-110.5
N_{oc} Note2	Config 1,2,4		dBm/SCS	-106		-88		Same as Noc/15kHz
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		Not applicable Note 5		-91		-111

		NR_FDD_FR1_B						-110.5	
		NR_TDD_FR1_C						-110	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-109.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-109	
		NR_FDD_FR1_F						-108.5	
		NR_FDD_FR1_G						-108	
		NR_FDD_FR1_H						-107.5	
$\hat{E}_s/I_{ot}$			dB	2.46	-5.97	2.46	-5.97	-0.01	-4.76
$\hat{E}_s/N_{oc}$			dB	6	1	6	1	3	0
SS-RSRP[Note3]	Config 1,2,4	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/SCS	-100	-105	-82	-87	-111.00	-114.00
		NR_FDD_FR1_B						-110.50	-113.50
		NR_TDD_FR1_C						-110.00	-113.00
		NR_FDD_FR1_D, NR_TDD_FR1_D						-109.50	-112.50
		NR_FDD_FR1_E, NR_TDD_FR1_E						-109.00	-112.00
		NR_FDD_FR1_F						-108.50	-111.50
		NR_FDD_FR1_G						-108.00	-111.00
		NR_FDD_FR1_H						-107.50	-110.50
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		Not applicable[Note 5]	Not applicable[Note 5]	-85	-90	-108.00	-111.00
		NR_FDD_FR1_B						-107.50	-110.50
		NR_TDD_FR1_C						-107.00	-110.00
		NR_FDD_FR1_D, NR_TDD_FR1_D						-106.50	-109.50
		NR_FDD_FR1_E, NR_TDD_FR1_E						-106.00	-109.00
		NR_FDD_FR1_F						-105.50	-108.50
		NR_FDD_FR1_G						-105.00	-108.00
		NR_FDD_FR1_H						-104.50	-107.50
Io[Note3]	Config 1,2,4	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 9.36MHz	-70.09		-52.09		-80.03	
		NR_FDD_FR1_B						-79.53	
		NR_TDD_FR1_C						-79.03	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-78.53	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-78.03	
		NR_FDD_FR1_F						-77.53	
		NR_FDD_FR1_G						-77.03	
		NR_FDD_FR1_H						-76.53	

	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 38.16MHz	Not applicable Note 5	-55.18	-77.12
		NR_FDD_FR1_B				-76.62
		NR_TDD_FR1_C				-76.12
		NR_FDD_FR1_D, NR_TDD_FR1_D				-75.62
		NR_FDD_FR1_E, NR_TDD_FR1_E				-75.12
		NR_FDD_FR1_F				-74.62
		NR_FDD_FR1_G				74.12
		NR_FDD_FR1_H				73.62
Propagation condition			-	AWGN		
Antenna configuration				1x2		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: Subtest 1 is not used when testing with 30kHz SSB SCS.
Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification

A.16.7.1.2.3 Test Requirements

The SS-RSRP measurement accuracy for cell 1 and cell 2 shall fulfil absolute requirement in clause 10.1A.2.1 and relative requirement in clause 10.1A.2.2 for 2RX RedCap UE.

A.16.7.1.3 SA inter-frequency case measurement accuracy with FR1 serving cell and FR1 target cell for 1 Rx UE

A.16.7.1.3.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1A.4.1.1 and 10.1A.4.1.2 for inter-frequency measurements with the testing configurations for NR cells in Table A.16.7.1.3.1-1.

Table A.16.7.1.3.11: Applicable NR configurations for FR1 inter-frequency SS-RSRP accuracy test

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.16.7.1.3.2 Test parameters

In this set of test cases there are two cells in the test, PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on a different frequency than the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.16.7.1.3.2-1 below. Both absolute and relative accuracy of RSRP inter-frequency measurements is tested by using the parameters in Table A.16.7.1.3.2-1. The inter-frequency measurements are supported by a measurement gap.

Table A.16.7.1.3.2-1: SS-RSRP inter-frequency test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN	1~4		freq1	freq2	freq1	freq2
$BW_{channel}$	1,4	MHz	10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
	2		10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
	3		20: $N_{RB,c}$ = 51		20: $N_{RB,c}$ = 51	
Duplex mode	1		FDD		FDD	
	2		TDD		TDD	
	3		TDD		TDD	
	4		HD-FDD		HD-FDD	
TDD configuration	1		N/A		N/A	
	2		TDDConf.1.1		TDDConf.1.1	
	3		TDDConf.2.1		TDDConf.2.1	
PDSCH Reference measurement channel	1,4		SR.1.1 FDD	-	SR.1.1 FDD	-
	2		SR.1.1 TDD		SR.1.1 TDD	
	3		SR.2.1 FDD		SR.2.1 FDD	
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD	-	CR.1.1 FDD	-
	2		CR.1.1 TDD	-	CR.1.1 TDD	-
	3		CR.2.1 FDD	-	CR.2.1 FDD	-
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	2		CCR.1.1 TDD	-	CCR.1.1 TDD	-
	3		CCR.2.1 TDD	-	CCR.2.1 TDD	-
SSB configuration	1,4		SSB.1 FR1		SSB.1 FR1	
	2		SSB.1 FR1		SSB.1 FR1	
	3		SSB.1 RedCap FR1		SSB.1 RedCap FR1	
OCNG Patterns	1~4		OP.1		OP.1	
TRS configuration	1,4		TRS.1.1 FDD	-	TRS.1.1 FDD	
	2		TRS.1.1 TDD		TRS.1.1 TDD	
	3		TRS.1.2 TDD		TRS.1.2 TDD	
Initial BWP Configuration	1~4		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration	1~4		DLBWP.1.1 ULBWP.1.1		DLBWP.1.1 ULBWP.1.1	
Time offset with Cell 1	1,4	ms	-	3	-	3
	2,3	µs	-	3	-	3
SMTC configuration	1,4		SMTC.2		SMTC.2	
	2,3		SMTC.1		SMTC.1	
EPRE ratio of PSS to SSS	1~4	dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						

EPRE ratio of OCNG DMRS to SSS Note 1							
EPRE ratio of OCNG to OCNG DMRS Note 1							
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1~4	dBm/15 kHz	-94.65		(N_{oc} for Channel 2 +8dB)	-115
	NR_FDD_FR1_B						-114.5
	NR_TDD_FR1_C						-114
	NR_FDD_FR1_D, NR_TDD_FR1_D						-113.5
	NR_FDD_FR1_E, NR_TDD_FR1_E						-113
	NR_FDD_FR1_F						-112.5
	NR_FDD_FR1_G						-112
	NR_FDD_FR1_H						-111.5
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5,	1,2,4	dBm/SSB SCS	-94.65		(N_{oc} for Channel 2 +8dB)	-115
	NR_FDD_FR1_B						-114.5
	NR_TDD_FR1_C						-114
	NR_FDD_FR1_D, NR_TDD_FR1_D						-113.5
	NR_FDD_FR1_E, NR_TDD_FR1_E						-113
	NR_FDD_FR1_F						-112.5
	NR_FDD_FR1_G						-112
	NR_FDD_FR1_H						-111.5
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5,	3		-91.65		(N_{oc} for Channel 2 +8dB)	-112.00
	NR_FDD_FR1_B						-111.50
	NR_TDD_FR1_C						-111.00
	NR_FDD_FR1_D, NR_TDD_FR1_D						-110.50
	NR_FDD_FR1_E, NR_TDD_FR1_E						-110.00
	NR_FDD_FR1_F						-109.50
	NR_FDD_FR1_G						-109.00
	NR_FDD_FR1_H						-108.50
$\hat{E}_s/I_{ot}$		1~4	dB	10	10	13	-3
SS-RSRP Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5,	1,2,4	dBm/SCS	-84.65		(RSRP for Cell 2 +25dB)	-118.00
	NR_FDD_FR1_B						-117.50
	NR_TDD_FR1_C						-117.00
	NR_FDD_FR1_D, NR_TDD_FR1_D						-116.50
	NR_FDD_FR1_E, NR_TDD_FR1_E						-116.00
	NR_FDD_FR1_F						-115.50
	NR_FDD_FR1_G						-115.00
	NR_FDD_FR1_H						-114.50
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5,	3		-84.65		(RSRP for Cell 2 +25dB)	-115.00
	NR_FDD_FR1_B						-114.50
	NR_TDD_FR1_C						-114.00
	NR_FDD_FR1_D, NR_TDD_FR1_D						-113.50

	NR_FDD_FR1_E, NR_TDD_FR1_E						-113.00
	NR_FDD_FR1_F						-112.50
	NR_FDD_FR1_G						-112.00
	NR_FDD_FR1_H						-111.50
Io[Note3]	NR_FDD_FR1_A, NR_TDD_FR1_A [NOTE 5],	1,2,4	dBm/ 9.36MHz	-56.28		(Io for Channel 2 +19.75dB)	-85.28
	NR_FDD_FR1_B						-84.78
	NR_TDD_FR1_C						-84.28
	NR_FDD_FR1_D, NR_TDD_FR1_D						-83.78
	NR_FDD_FR1_E, NR_TDD_FR1_E						-83.28
	NR_FDD_FR1_F						-82.78
	NR_FDD_FR1_G						-82.28
	NR_FDD_FR1_H						-81.78
	NR_FDD_FR1_A, NR_TDD_FR1_A [NOTE 5],	3	dBm/ 18.36MHz	-53.33		(Io for Channel 2 +19.75dB)	-82.35
	NR_FDD_FR1_B						-81.85
	NR_TDD_FR1_C						-81.35
	NR_FDD_FR1_D, NR_TDD_FR1_D						-80.85
	NR_FDD_FR1_E, NR_TDD_FR1_E						-80.35
	NR_FDD_FR1_F						-79.85
	NR_FDD_FR1_G						-79.35
	NR_FDD_FR1_H						-78.85
$\hat{E}_s / N_{oc}$		1~4	dB	10	10	13	-3
Propagation condition		1~4	-	AWGN		AWGN	
Antenna configuration		1~4		1x1 low		1x1 low	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

A.16.7.1.3.3 Test Requirements

The SS-RSRP measurement accuracy for Cell 1 and Cell 2 shall fulfil the absolute requirement in clause 10.1A.4.1.1 and relative requirement in clause 10.1A.4.1.2.

A.16.7.1.4 SA inter-frequency case measurement accuracy with FR1 serving cell and FR1 target cell for 2 Rx UE

A.16.7.1.4.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1A.4.1.1 and 10.1A.4.1.2 for inter-frequency measurements with the testing configurations for NR cells in Table A.16.7.1.4.1-1.

Table A.16.7.1.4.1-1: Applicable NR configurations for FR1 inter-frequency SS-RSRP accuracy test

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.16.7.1.4.2 Test parameters

In this set of test cases there are two cells in the test, PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on a different frequency than the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.16.7.1.4.1-1 below. Both absolute and relative accuracy of RSRP inter-frequency measurements is tested by using the parameters in Table A.16.7.1.4.11. The inter-frequency measurements are supported by a measurement gap.

Table A.16.7.1.4.1-1: SS-RSRP inter-frequency test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN	1~4		freq1	freq2	freq1	freq2
$BW_{channel}$	1,4	MHz	10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
	2		10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
	3		20: $N_{RB,c}$ = 51		20: $N_{RB,c}$ = 51	
Duplex mode	1		FDD		FDD	
	2		TDD		TDD	
	3		TDD		TDD	
	4		HD-FDD		HD-FDD	
TDD configuration	1		N/A		N/A	
	2		TDDConf.1.1		TDDConf.1.1	
	3		TDDConf.2.1		TDDConf.2.1	
PDSCH Reference measurement channel	1,4		SR.1.1 FDD	-	SR.1.1 FDD	-
	2		SR.1.1 TDD		SR.1.1 TDD	
	3		SR.2.1 FDD		SR.2.1 FDD	
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD	-	CR.1.1 FDD	-
	2		CR.1.1 TDD	-	CR.1.1 TDD	-
	3		CR.2.1 FDD	-	CR.2.1 FDD	-
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	2		CCR.1.1 TDD	-	CCR.1.1 TDD	-
	3		CCR.2.1 TDD	-	CCR.2.1 TDD	-
SSB configuration	1,4		SSB.1 FR1		SSB.1 FR1	
	2		SSB.1 FR1		SSB.1 FR1	
	3		SSB.1 RedCap FR1		SSB.1 RedCap FR1	
OCNG Patterns	1~4		OP.1		OP.1	
TRS configuration	1,4		TRS.1.1 FDD	-	TRS.1.1 FDD	
	2		TRS.1.1 TDD		TRS.1.1 TDD	
	3		TRS.1.2 TDD		TRS.1.2 TDD	
Initial BWP Configuration	1~4		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration	1~4		DLBWP.1.1 ULBWP.1.1		DLBWP.1.1 ULBWP.1.1	
Time offset with Cell 1	1,4	ms	-	3	-	3
	2,3	μs	-	3	-	3

SMTC configuration		1,4		SMTC.2		SMTC.2	
		2,3		SMTC.1		SMTC.1	
EPRE ratio of PSS to SSS		1~4	dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH DMRS							
EPRE ratio of OCNG DMRS to SSS Note 1							
EPRE ratio of OCNG to OCNG DMRS Note 1							
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1~4	dBm/15 kHz	-94.65		(N_{oc} for Channel 2 +8dB)	-115
	NR_FDD_FR1_B						-114.5
	NR_TDD_FR1_C						-114
	NR_FDD_FR1_D, NR_TDD_FR1_D						-113.5
	NR_FDD_FR1_E, NR_TDD_FR1_E						-113
	NR_FDD_FR1_F						-112.5
	NR_FDD_FR1_G						-112
	NR_FDD_FR1_H						-111.5
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5,	1,2,4	dBm/SSB SCS	-94.65		(N_{oc} for Channel 2 +8dB)	-115
	NR_FDD_FR1_B						-114.5
	NR_TDD_FR1_C						-114
	NR_FDD_FR1_D, NR_TDD_FR1_D						-113.5
	NR_FDD_FR1_E, NR_TDD_FR1_E						-113
	NR_FDD_FR1_F						-112.5
	NR_FDD_FR1_G						-112
	NR_FDD_FR1_H						-111.5
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5,	3		-91.65		(N_{oc} for Channel 2 +8dB)	-112.00
	NR_FDD_FR1_B						-111.50
	NR_TDD_FR1_C						-111.00
	NR_FDD_FR1_D, NR_TDD_FR1_D						-110.50
	NR_FDD_FR1_E, NR_TDD_FR1_E						-110.00
	NR_FDD_FR1_F						-109.50
	NR_FDD_FR1_G						-109.00
	NR_FDD_FR1_H						-108.50
$\hat{E}_s/I_{ot}$		1~4	dB	10	10	13	-3
SS-RSRP Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5,	1,2,4	dBm/SCS	-84.65		(RSRP for Cell 2 +25dB)	-118.00

	NR_FDD_FR1_B						-117.50
	NR_TDD_FR1_C						-117.00
	NR_FDD_FR1_D, NR_TDD_FR1_D						-116.50
	NR_FDD_FR1_E, NR_TDD_FR1_E						-116.00
	NR_FDD_FR1_F						-115.50
	NR_FDD_FR1_G						-115.00
	NR_FDD_FR1_H						-114.50
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5,	3		-84.65		(RSRP for Cell 2 +25dB)	-115.00
	NR_FDD_FR1_B						-114.50
	NR_TDD_FR1_C						-114.00
	NR_FDD_FR1_D, NR_TDD_FR1_D						-113.50
	NR_FDD_FR1_E, NR_TDD_FR1_E						-113.00
	NR_FDD_FR1_F						-112.50
	NR_FDD_FR1_G						-112.00
	NR_FDD_FR1_H						-111.50
Io Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5,	1,2,4	dBm/ 9.36MHz	-56.28		(Io for Channel 2 +19.75dB)	-85.28
	NR_FDD_FR1_B						-84.78
	NR_TDD_FR1_C						-84.28
	NR_FDD_FR1_D, NR_TDD_FR1_D						-83.78
	NR_FDD_FR1_E, NR_TDD_FR1_E						-83.28
	NR_FDD_FR1_F						-82.78
	NR_FDD_FR1_G						-82.28
	NR_FDD_FR1_H						-81.78
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5,	3	dBm/ 18.36MHz	-53.33		(Io for Channel 2 +19.75dB)	-82.35
	NR_FDD_FR1_B						-81.85
	NR_TDD_FR1_C						-81.35
	NR_FDD_FR1_D, NR_TDD_FR1_D						-80.85
	NR_FDD_FR1_E, NR_TDD_FR1_E						-80.35
	NR_FDD_FR1_F						-79.85
	NR_FDD_FR1_G						-79.35
	NR_FDD_FR1_H						-78.85
$\hat{E}_s / N_{oc}$		1~4	dB	10	10	13	-3
Propagation condition		1~4	-	AWGN		AWGN	
Antenna configuration		1~4		1x2		1x2	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

A.16.7.1.4.3 Test Requirements

The SS-RSRP measurement accuracy for Cell 1 and Cell 2 shall fulfil the absolute requirement in clause 10.1A.4.1.1 and relative requirement in clause 10.1A.4.1.2.

A.16.7.2 SS-RSRQ

A.16.7.2.1 SA: Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell for 1 Rx UE

A.16.7.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1A.6.

A.16.7.2.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table A.16.7.2.1.2-1. The absolute accuracy of SS-RSRQ intra-frequency measurement is tested by using the parameters in Table A.16.7.2.1.2-2. In all test cases, Cell 1 is the PCell and Cell 2 is the target cell.

Table A.16.7.2.1.2-1: SS-RSRQ Intra frequency SS-RSRQ supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.7.2.1.2-2: SS-RSRQ Intra frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1		freq1		freq1	
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
	Config 4		HD-FDD					
TDD configuration	Config 1, 4		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
$BW_{channel}$	Config 1, 4	MHz	10: $N_{RB,c}$ = 52					
	Config 2		10: $N_{RB,c}$ = 52					
	Config 3		20: $N_{RB,c}$ = 51					
Gap Pattern ID			0					
BWP configuration	Initial DL BWP		DLBWP.0.1					
	Dedicated DL BWP		DLBWP.1.1					
	Initial UL BWP		ULBWP.0.1					
	Dedicated UL BWP		ULBWP.1.1					
DRX Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1, 4		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	

		Config 3		SR2.1 TDD		SR2.1 TDD		SR2.1 TDD			
RMSI CORESET Reference Channel		Config 1, 4		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD			
		Config 2		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD			
		Config 3		CR.2.1 TDD		CR.2.1 TDD		CR.2.1 TDD			
Control Channel RMC		Config 1, 4		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-		
		Config 2		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD			
		Config 3		CCR.2.1 TDD		CCR.2.1 TDD		CCR.2.1 TDD			
TRS Configuration		Config 1, 4		TRS.1.1 FDD	-	TRS.1.1 FDD	-	TRS.1.1 FDD	-		
		Config 2		TRS.1.1 TDD		TRS.1.1 TDD		TRS.1.1 TDD			
		Config 3		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD			
OCNG Patterns				OP. 1							
SS-RSSI-Measurement				Not Applicable							
Time offset with Cell 1		Config 1,4	ms	-	3	-	3	-	3		
		Config 2,3	µs	-	3	-	3	-	3		
SMTC configuration		Config 1,4		SMTC.2							
		Config 2,3		SMTC.1							
SSB configuration		Config 1,2,4		SSB.1 FR1							
		Config 3		SSB.1 RedCap FR1							
CSI-RS for tracking		Config 1,4		TRS.1.1 FDD							
		Config 2		TRS.1.1 TDD							
		Config 3		TRS.1.2 TDD							
PDSCH/PDCCH subcarrier spacing		Config 1,2,4	kHz	15 kHz							
		Config 3		30kHz							
EPRE ratio of PSS to SSS			dB	0	0	0	0	0	0		
EPRE ratio of PBCH DMRS to SSS											
EPRE ratio of PBCH to PBCH DMRS											
EPRE ratio of PDCCH DMRS to SSS											
EPRE ratio of PDCCH to PDCCH DMRS											
EPRE ratio of PDSCH DMRS to SSS											
EPRE ratio of PDSCH to PDSCH											
EPRE ratio of OCNG DMRS to SSS(Note 1)											
EPRE ratio of OCNG to OCNG DMRS (Note 1)											
N_{oc} Note2	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/15kHz	-85		-101		-114			
		NR_FDD_FR1_B						-113.5			
		NR_TDD_FR1_C						-113			
		NR_FDD_FR1_D, NR_TDD_FR1_D						-112.5			
		NR_FDD_FR1_E, NR_TDD_FR1_E						-112			
		NR_FDD_FR1_F						-111.5			
		NR_FDD_FR1_G						-111			
		NR_FDD_FR1_H						-110.5			
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-91		-		-114			
		NR_FDD_FR1_B						-113.5			
		NR_TDD_FR1_C						-113			

		NR_FDD_FR1_D, NR_TDD_FR1_D						-112.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-112	
		NR_FDD_FR1_F						-111.5	
		NR_FDD_FR1_G						-111	
		NR_FDD_FR1_H						-110.5	
N_{oc} Note2	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/SCS	-85		-101		-114 -113.5 -113 -112.5 -112 -111.5 -111 -110.5	
		NR_FDD_FR1_B							
		NR_TDD_FR1_C							
		NR_FDD_FR1_D, NR_TDD_FR1_D							
		NR_FDD_FR1_E, NR_TDD_FR1_E							
		NR_FDD_FR1_F							
		NR_FDD_FR1_G							
		NR_FDD_FR1_H							
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-88		-		-111	
		NR_FDD_FR1_B						-110.5	
		NR_TDD_FR1_C						-110	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-109.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-109	
		NR_FDD_FR1_F						-108.5	
		NR_FDD_FR1_G						-108	
		NR_FDD_FR1_H						-107.5	
$\hat{E}_s/I_{ot}$			dB	-1.76		-4.7		-5..46	-5.46
$\hat{E}_s/N_{oc}$			dB	3	3	-2.9	-2.9	-4	-4
SS-RSRP Note 3	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/SCS	-82	-82	-103.9	-103.9	-118	-118
		NR_FDD_FR1_B						-117.5	-117.5
		NR_TDD_FR1_C						-117	-117
		NR_FDD_FR1_D, NR_TDD_FR1_D						-116.5	-116.5
		NR_FDD_FR1_E, NR_TDD_FR1_E						-116	-116
		NR_FDD_FR1_F						-115.5	-115.5
		NR_FDD_FR1_G						-115	-115
		NR_FDD_FR1_H						-114.5	-114.5
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-85	-85	-	-	-115	-115
		NR_FDD_FR1_B						-114.5	-114.5
		NR_TDD_FR1_C						-114	-114
		NR_FDD_FR1_D, NR_TDD_FR1_D						-113.5	-113.5
		NR_FDD_FR1_E, NR_TDD_FR1_E						-113	-113
		NR_FDD_FR1_F						-112.5	-112.5
		NR_FDD_FR1_G						-112	-112
		NR_FDD_FR1_H						-111.5	-111.5

SS-RSRQ Note3		NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dB	-14.77	-14.77	-16.76	-16.76	-17.34	-17.34
		NR_FDD_FR1_B							
		NR_TDD_FR1_C							
		NR_FDD_FR1_D, NR_TDD_FR1_D							
		NR_FDD_FR1_E, NR_TDD_FR1_E							
		NR_FDD_FR1_F							
		NR_FDD_FR1_G							
		NR_FDD_FR1_H							
Io Note3	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 9.36MHz	-50		-70		-83.5	
		NR_FDD_FR1_B						-83	
		NR_TDD_FR1_C						-82.5	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-82	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-81.5	
		NR_FDD_FR1_F						-81	
		NR_FDD_FR1_G						-80.5	
		NR_FDD_FR1_H						-80	
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 18.36MHz	-50		-		-80.6	
		NR_FDD_FR1_B						-80.1	
		NR_TDD_FR1_C						-79.6	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-79.1	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-78.6	
		NR_FDD_FR1_F						-78.1	
		NR_FDD_FR1_G						-77.6	
		NR_FDD_FR1_H						-77.1	
Propagation condition			-	AWGN	AWGN	AWGN	AWGN	AWGN	AWGN
Antenna configuration				1x1	1x1	1x1	1x1	1x1	1x1

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRQ, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: NR operating band groups are as defined in clause 3.5.2.

Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

A.16.7.2.1.3 Test Requirements

The SS-RSRQ measurement accuracy shall fulfil the requirements in clause 10.1A.6.

A.16.7.2.2 SA: Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell for 2 Rx UE

A.16.7.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1A.6.

A.16.7.2.2.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table A.16.7.2.2.2-1. The absolute accuracy of SS-RSRQ intra-frequency measurement is tested by using the parameters in Table A.16.7.2.2.2-2. In all test cases, Cell 1 is the PCell and Cell 2 is the target cell.

Table A.16.7.2.2.2-1: SS-RSRQ Intra frequency SS-RSRQ supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.7.2.2.2-2: SS-RSRQ Intra frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1		freq1		freq1	
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
	Config 4		HD-FDD					
TDD configuration	Config 1, 4		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
$BW_{channel}$	Config 1, 4	MHz	10: $N_{RB,c}$ = 52					
	Config 2		10: $N_{RB,c}$ = 52					
	Config 3		20: $N_{RB,c}$ = 51					
Gap Pattern ID			0					
BWP configuration	Initial DL BWP		DLBWP.0.1					
	Dedicated DL BWP		DLBWP.1.1					
	Initial UL BWP		ULBWP.0.1					
	Dedicated UL BWP		ULBWP.1.1					
DRX Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1, 4		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3		SR2.1 TDD		SR2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	
	Config 2		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
	Config 3		CR.2.1 TDD		CR.2.1 TDD		CR.2.1 TDD	
Control Channel RMC	Config 1, 4		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-

	Config 2		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD		
	Config 3		CCR.2.1 TDD		CCR.2.1 TDD		CCR.2.1 TDD		
TRS Configuration	Config 1, 4		TRS.1.1 FDD	-	TRS.1.1 FDD	-	TRS.1.1 FDD	-	
	Config 2		TRS.1.1 TDD		TRS.1.1 TDD		TRS.1.1 TDD		
	Config 3		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD		
OCNG Patterns			OP. 1						
SS-RSSI-Measurement			Not Applicable						
Time offset with Cell 1	Config 1,4	ms	-	3	-	3	-	3	
	Config 2,3	µs	-	3	-	3	-	3	
SMTC configuration	Config 1,4		SMTC.2						
	Config 2,3		SMTC.1						
SSB configuration	Config 1,2,4		SSB.1 FR1						
	Config 3		SSB.1 RedCap FR1						
CSI-RS for tracking	Config 1,4		TRS.1.1 FDD						
	Config 2		TRS.1.1 TDD						
	Config 3		TRS.1.2 TDD						
PDSCH/PDCCH subcarrier spacing	Config 1,2,4	kHz	15 kHz						
	Config 3		30kHz						
EPRE ratio of PSS to SSS		dB	0	0	0	0	0	0	
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/15kHz	-85		-101		-114	
		NR_FDD_FR1_B						-113.5	
		NR_TDD_FR1_C						-113	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-112.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-112	
		NR_FDD_FR1_F						-111.5	
		NR_FDD_FR1_G						-111	
		NR_FDD_FR1_H						-110.5	
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-91		-		-114	
		NR_FDD_FR1_B						-113.5	
		NR_TDD_FR1_C						-113	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-112.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-112	
		NR_FDD_FR1_F						-111.5	
		NR_FDD_FR1_G						-111	
		NR_FDD_FR1_H						-110.5	
N_{oc} Note2	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/SCS	-85		-101		-114 -113.5 -113	

		NR_FDD_FR1_B						-112.5	
		NR_TDD_FR1_C						-112	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-111.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-111	
		NR_FDD_FR1_F						-110.5	
		NR_FDD_FR1_G							
		NR_FDD_FR1_H							
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-88		-		-111	
		NR_FDD_FR1_B						-110.5	
		NR_TDD_FR1_C						-110	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-109.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-109	
		NR_FDD_FR1_F						-108.5	
		NR_FDD_FR1_G						-108	
		NR_FDD_FR1_H						-107.5	
$\hat{E}_s/I_{ot}$			dB	-1.76		-4.7		-5..46	-5.46
$\hat{E}_s/N_{oc}$			dB	3	3	-2.9	-2.9	-4	-4
SS-RSRP Note 3	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/SCS	-82	-82	-103.9	-103.9	-118	-118
		NR_FDD_FR1_B						-117.5	-117.5
		NR_TDD_FR1_C						-117	-117
		NR_FDD_FR1_D, NR_TDD_FR1_D						-116.5	-116.5
		NR_FDD_FR1_E, NR_TDD_FR1_E						-116	-116
		NR_FDD_FR1_F						-115.5	-115.5
		NR_FDD_FR1_G						-115	-115
		NR_FDD_FR1_H						-114.5	-114.5
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-85	-85	-	-	-115	-115
		NR_FDD_FR1_B						-114.5	-114.5
		NR_TDD_FR1_C						-114	-114
		NR_FDD_FR1_D, NR_TDD_FR1_D						-113.5	-113.5
		NR_FDD_FR1_E, NR_TDD_FR1_E						-113	-113
		NR_FDD_FR1_F						-112.5	-112.5
		NR_FDD_FR1_G						-112	-112
		NR_FDD_FR1_H						-111.5	-111.5
SS-RSRQ Note3		NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dB	-14.77	-14.77	-16.76	-16.76	-17.34	-17.34
		NR_FDD_FR1_B							
		NR_TDD_FR1_C							
		NR_FDD_FR1_D, NR_TDD_FR1_D							
		NR_FDD_FR1_E, NR_TDD_FR1_E							
		NR_FDD_FR1_F							
		NR_FDD_FR1_G							
		NR_FDD_FR1_H							

Io[Note3]	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 9.36MHz	-50		-70		-83.5	
		NR_FDD_FR1_B						-83	
		NR_TDD_FR1_C						-82.5	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-82	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-81.5	
		NR_FDD_FR1_F						-81	
		NR_FDD_FR1_G						-80.5	
		NR_FDD_FR1_H						-80	
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 18.36MHz	-50		-		-80.6	
		NR_FDD_FR1_B						-80.1	
		NR_TDD_FR1_C						-79.6	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-79.1	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-78.6	
		NR_FDD_FR1_F						-78.1	
		NR_FDD_FR1_G						-77.6	
		NR_FDD_FR1_H						-77.1	
Propagation condition			-	AWGN	AWGN	AWGN	AWGN	AWGN	AWGN
Antenna configuration				1x2	1x2	1x2	1x2	1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRQ, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: NR operating band groups are as defined in clause 3.5.2.
Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

A.16.7.2.2.3 Test Requirements

The SS-RSRQ measurement accuracy shall fulfil the requirements in clause 10.1A.6.

A.16.7.2.3 SA Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell for 1 Rx UE

A.16.7.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1A.8.1.1 and 10.1A.8.1.2.

A.16.7.2.3.2 Test parameters

In this test case the two cells (i.e., Cell 1 and Cell 2) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.16.7.2.3.2-1. Both absolute accuracy and relative

accuracy requirements of SS-RSRQ inter-frequency measurement are tested by using test parameters in Table A.16.7.2.3.2-2. In all test cases, Cell 1 is the PCell and Cell 2 is target cell.

Table A.16.7.2.3.2-1: SS-RSRQ Inter frequency SS-RSRQ supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table A.16.7.2.3.22-2: SS-RSRQ Inter frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1	freq2	freq1	freq2	freq1	freq2
Duplex mode	Config 1,4		FDD					
	Config 2,3		TDD					
TDD configuration	Config 1,4		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
$BW_{channel}$	Config 1,4	MHz	10: $N_{RB,c}$ = 52					
	Config 2		10: $N_{RB,c}$ = 52					
	Config 3		20: $N_{RB,c}$ = 51					
Gap pattern ID	Config 1,2,3,4		0					
BWP BW	Config 1,4		10: $N_{RB,c}$ = 52					
	Config 2		10: $N_{RB,c}$ = 52					
	Config 3		20: $N_{RB,c}$ = 51					
DRX Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2,5		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3,6		SR2.1 TDD		SR2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	-	R.1.1 FDD	-	CR.1.1 FDD	
	Config 2		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
	Config 3		CR2.1 TDD		CR2.1 TDD		CR2.1 TDD	
Dedicated CORESET Reference Channel	Config 1,4		CCR.1 .1 FDD	-	CCR.1. 1 FDD	-	CCR.1. 1 FDD	-
	Config 2		CCR.1 .1 TDD		CCR.1. 1 TDD		CCR.1. 1 TDD	
	Config 3		CCR2. 1 TDD		CCR2.1 TDD		CCR2. 1 TDD	
TRS Configuration	Config 1,4		TRS.1. 1 FDD	-	TRS.1.1 FDD	-	TRS.1. 1 FDD	-
	Config 2		TRS.1. 1 TDD		TRS.1.1 TDD		TRS.1. 1 TDD	
	Config 3		TRS.1. 2 TDD		TRS.1.2 TDD		TRS.1. 2 TDD	
OCNG Patterns			OCNG pattern 1					
Time offset with Cell 1	Config 1,4	ms	-	3	-	3	-	3
	Config 2,3	µs	-	3	-	3	-	3
SMTC configuration	Config 1,4		SMTC pattern 2					
	Config 2,3		SMTC pattern 1					
SSB configuration	Config 1,2,4		SSB pattern 1 in FR1					
	Config 3		SSB.1 RedCap FR1					

CSI-RS for tracking		Config 1,4		TRS.1.1 FDD							
		Config 2		TRS.1.1 TDD							
		Config 3		TRS.1.2 TDD							
PDSCH/PDCCH subcarrier spacing		Config 1,2,4	kHz	15 kHz							
		Config 3		30 kHz							
EPRE ratio of PSS to SSS			dB	0	0	0	0	0	0		
EPRE ratio of PBCH DMRS to SSS											
EPRE ratio of PBCH to PBCH DMRS											
EPRE ratio of PDCCH DMRS to SSS											
EPRE ratio of PDCCH to PDCCH DMRS											
EPRE ratio of PDSCH DMRS to SSS											
EPRE ratio of PDSCH to PDSCH											
EPRE ratio of OCNG DMRS to SSS(Note 1)											
EPRE ratio of OCNG to OCNG DMRS (Note 1)											
N_{oc} Note2	Config 1,2,4	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/15kHz	-80.18			-106			-116	
		NR_FDD_FR1_B								-115.5	
		NR_TDD_FR1_C								-115	
		NR_FDD_FR1_D NR_TDD_FR1_D								-114.5	
		NR_FDD_FR1_E NR_TDD_FR1_E								-114	
		NR_FDD_FR1_F								-113.5	
		NR_FDD_FR1_G								-113	
		NR_FDD_FR1_H								-112.5	
N_{oc} Note2	Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/15kHz	-86.27			-113			-116	
		NR_FDD_FR1_B								-115.5	
		NR_TDD_FR1_C								-115	
		NR_FDD_FR1_D NR_TDD_FR1_D								-114.5	
		NR_FDD_FR1_E NR_TDD_FR1_E								-114	
		NR_FDD_FR1_F								-113.5	
		NR_FDD_FR1_G								-113	
		NR_FDD_FR1_H								-112.5	
N_{oc} Note2	Config 1,2,4	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/15kHz	-80.18			-106			-116	
		NR_FDD_FR1_B								-115.5	
		NR_TDD_FR1_C								-115	
		NR_FDD_FR1_D NR_TDD_FR1_D								-114.5	
		NR_FDD_FR1_E NR_TDD_FR1_E								-114	
		NR_FDD_FR1_F								-113.5	
		NR_FDD_FR1_G								-113	
		NR_FDD_FR1_H								-112.5	
	Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6		-83.27			-110			-113	
		NR_FDD_FR1_B								-112.5	
		NR_TDD_FR1_C								-112	
		NR_FDD_FR1_D NR_TDD_FR1_D								-111.5	
		NR_FDD_FR1_E								-111	

		NR_TDD_FR1_E							
		NR_FDD_FR1_F						-110.5	
		NR_FDD_FR1_G						-110	
		NR_FDD_FR1_H						-109.5	
$\hat{E}_s / I_{ot}$			dB	-1.75		-1.75		3	-1.75
$\hat{E}_s / N_{oc}$			dB	-1.75		-1.75		3	-1.75
SS-RSRP Note3	Config 1,2,4	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/SCS	-81.93	-81.93	-107.75	-107.75	-113	-117.75
		NR_FDD_FR1_B						-112.5	-117.25
		NR_TDD_FR1_C						-112	-116.75
		NR_FDD_FR1_D NR_TDD_FR1_D						-111.5	-116.25
		NR_FDD_FR1_E NR_TDD_FR1_E						-111	-115.75
		NR_FDD_FR1_F						-110.5	-115.2
		NR_FDD_FR1_G						-110	-114.75
		NR_FDD_FR1_H						-109.5	-114.25
	Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6		-85.02	-85.02	-111.75	-111.75	-110	-114.75
		NR_FDD_FR1_B						-109.5	-114.25
		NR_TDD_FR1_C						-109	-113.75
		NR_FDD_FR1_D NR_TDD_FR1_D						-108.5	-113.25
		NR_FDD_FR1_E NR_TDD_FR1_E						-108	-112.75
		NR_FDD_FR1_F						-107.5	-112.2
		NR_FDD_FR1_G						-107	-111.75
		NR_FDD_FR1_H						-106.5	-111.25
SS-RSRQ Note3		NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dB	-14.77	-14.77	-40.59	-40.59	12.56T	14.76T
		NR_FDD_FR1_B							
		NR_TDD_FR1_C							
		NR_FDD_FR1_D NR_TDD_FR1_D							
		NR_FDD_FR1_E							

		NR_TDD_FR1_E							
		NR_FDD_FR1_F							
		NR_FDD_FR1_G							
		NR_FDD_FR1_H							
Io[Note3]	Config 1,2,4	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/SCS	-50		-75.83		-83.28	-85.83
		NR_FDD_FR1_B						-82.78	-85.33
		NR_TDD_FR1_C						-82.28	-84.83
		NR_FDD_FR1_D NR_TDD_FR1_D						-81.78	-84.33
		NR_FDD_FR1_E NR_TDD_FR1_E						-81.28	-83.83
		NR_FDD_FR1_F						-80.78	-83.33
		NR_FDD_FR1_G						-80.28	-82.83
		NR_FDD_FR1_H						-79.78	-82.33
	Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6		-50		-76.73		-77.19	-79.73
		NR_FDD_FR1_B						-76.69	-79.23
		NR_TDD_FR1_C						-76.19	-78.73
		NR_FDD_FR1_D NR_TDD_FR1_D						-75.69	-78.23
		NR_FDD_FR1_E NR_TDD_FR1_E						-75.19	-77.73
		NR_FDD_FR1_F						-74.69	-77.23
		NR_FDD_FR1_G						-74.19	-76.73
		NR_FDD_FR1_H						-73.69	-76.53
Propagation condition			-	AWGN	AWGN	AWGN	AWGN	AWGN	AWGN
Antenna configuration				1x1	1x1	1x1	1x1	1x1	1x1

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRQ, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: NR operating band groups are as defined in clause 3.5.2.

Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

A.16.7.2.3.3 Test Requirements

The SS-RSRQ measurement accuracy shall fulfil the requirements in clause 10.1A.8.1.1 and 10.1A.8.1.2.

A.16.7.2.4 SA Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell for 2 Rx UE

A.16.7.2.4.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1A.8.1.1 and 10.1A.8.1.2.

A.16.7.2.4.2 Test parameters

In this test case the two cells (i.e., Cell 1 and Cell 2) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.16.7.2.4.2-1. Both absolute accuracy and relative accuracy requirements of SS-RSRQ inter-frequency measurement are tested by using test parameters in Table A.16.7.2.4.2-2. In all test cases, Cell 1 is the PCell and Cell 2 is target cell.

Table A.16.7.2.4.2-1: SS-RSRQ Inter frequency SS-RSRQ supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table A.16.7.2.4.2-2: SS-RSRQ Inter frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1	freq2	freq1	freq2	freq1	freq2
Duplex mode	Config 1,4		FDD					
	Config 2,3		TDD					
TDD configuration	Config 1,4		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
$BW_{channel}$	Config 1,4	MHz	10: $N_{RB,c}$ = 52					
	Config 2		10: $N_{RB,c}$ = 52					
	Config 3		20: $N_{RB,c}$ = 51					
Gap pattern ID	Config 1,2,3,4		0					
BWP BW	Config 1,4		10: $N_{RB,c}$ = 52					
	Config 2		10: $N_{RB,c}$ = 52					
	Config 3		20: $N_{RB,c}$ = 51					
DRX Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2,5		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3,6		SR2.1 TDD		SR2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	-	R.1.1 FDD	-	CR.1.1 FDD	
	Config 2		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
	Config 3		CR2.1 TDD		CR2.1 TDD		CR2.1 TDD	
Dedicated CORESET Reference Channel	Config 1,4		CCR.1 .1 FDD	-	CCR.1. 1 FDD	-	CCR.1. 1 FDD	-
	Config 2		CCR.1 .1 TDD		CCR.1. 1 TDD		CCR.1. 1 TDD	
	Config 3		CCR2. 1 TDD		CCR2.1 TDD		CCR2. 1 TDD	

TRS Configuration	Config 1,4		TRS.1.1 FDD	-	TRS.1.1 FDD	-	TRS.1.1 FDD	-	
	Config 2		TRS.1.1 TDD		TRS.1.1 TDD		TRS.1.1 TDD		
	Config 3		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD		
OCNG Patterns			OCNG pattern 1						
Time offset with Cell 1	Config 1,4	ms	-	3	-	3	-	3	
	Config 2,3	µs	-	3	-	3	-	3	
SMTC configuration	Config 1,4		SMTC pattern 2						
	Config 2,3		SMTC pattern 1						
SSB configuration	Config 1,2,4		SSB pattern 1 in FR1						
	Config 3		SSB.1 RedCap FR1						
CSI-RS for tracking	Config 1,4		TRS.1.1 FDD						
	Config 2		TRS.1.1 TDD						
	Config 3		TRS.1.2 TDD						
PDSCH/PDCCH subcarrier spacing	Config 1,2,4	kHz	15 kHz						
	Config 3		30 kHz						
EPRE ratio of PSS to SSS		dB	0	0	0	0	0	0	
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2	Config 1,2,4	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/15kHz	-80.18		-106		-116	
		NR_FDD_FR1_B						-115.5	
		NR_TDD_FR1_C						-115	
		NR_FDD_FR1_D NR_TDD_FR1_D						-114.5	
		NR_FDD_FR1_E NR_TDD_FR1_E						-114	
		NR_FDD_FR1_F						-113.5	
		NR_FDD_FR1_G						-113	
		NR_FDD_FR1_H						-112.5	
N_{oc} Note2	Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/15kHz	-86.27		-113		-116	
		NR_FDD_FR1_B						-115.5	
		NR_TDD_FR1_C						-115	
		NR_FDD_FR1_D NR_TDD_FR1_D						-114.5	
		NR_FDD_FR1_E NR_TDD_FR1_E						-114	
		NR_FDD_FR1_F						-113.5	
		NR_FDD_FR1_G						-113	
		NR_FDD_FR1_H						-112.5	
N_{oc} Note2	Config 1,2,4	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/15kHz	-80.18		-106		-116	
		NR_FDD_FR1_B						-115.5	
		NR_TDD_FR1_C						-115	
		NR_FDD_FR1_D NR_TDD_FR1_D						-114.5	

		NR_FDD_FR1_E NR_TDD_FR1_E						-114	
		NR_FDD_FR1_F						-113.5	
		NR_FDD_FR1_G						-113	
		NR_FDD_FR1_H						-112.5	
	Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6		-83.27		-110		-113	
		NR_FDD_FR1_B						-112.5	
		NR_TDD_FR1_C						-112	
		NR_FDD_FR1_D NR_TDD_FR1_D						-111.5	
		NR_FDD_FR1_E NR_TDD_FR1_E						-111	
		NR_FDD_FR1_F						-110.5	
		NR_FDD_FR1_G						-110	
		NR_FDD_FR1_H						-109.5	
$\hat{E}_s / I_{ot}$			dB	-1.75		-1.75		3	-1.75
$\hat{E}_s / N_{oc}$			dB	-1.75		-1.75		3	-1.75
SS-RSRP[Note3]	Config 1,2,4	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/SCS	-81.93	-81.93	-107.75	-107.75	-113	-117.75
		NR_FDD_FR1_B						-112.5	-117.25
		NR_TDD_FR1_C						-112	-116.75
		NR_FDD_FR1_D NR_TDD_FR1_D						-111.5	-116.25
		NR_FDD_FR1_E NR_TDD_FR1_E						-111	-115.75
		NR_FDD_FR1_F						-110.5	-115.2
		NR_FDD_FR1_G						-110	-114.75
		NR_FDD_FR1_H						-109.5	-114.25
	Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6		-85.02	-85.02	-111.75	-111.75	-110	-114.75
		NR_FDD_FR1_B						-109.5	-114.25
		NR_TDD_FR1_C						-109	-113.75
		NR_FDD_FR1_D NR_TDD_FR1_D						-108.5	-113.25
		NR_FDD_FR1_E NR_TDD_FR1_E						-108	-112.75
		NR_FDD_FR1_F						-107.5	-112.2

		NR_FDD_FR1_G						-107	-111.75
		NR_FDD_FR1_H						-106.5	-111.25
SS-RSRQ[Note3]		NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dB	-14.77	-14.77	-40.59	-40.59	12.56T	14.76T
		NR_FDD_FR1_B							
		NR_TDD_FR1_C							
		NR_FDD_FR1_D NR_TDD_FR1_D							
		NR_FDD_FR1_E NR_TDD_FR1_E							
		NR_FDD_FR1_F							
		NR_FDD_FR1_G							
		NR_FDD_FR1_H							
Io[Note3]	Config 1,2,4	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/SCS	-50		-75.83		-83.28	-85.83
		NR_FDD_FR1_B						-82.78	-85.33
		NR_TDD_FR1_C						-82.28	-84.83
		NR_FDD_FR1_D NR_TDD_FR1_D						-81.78	-84.33
		NR_FDD_FR1_E NR_TDD_FR1_E						-81.28	-83.83
		NR_FDD_FR1_F						-80.78	-83.33
		NR_FDD_FR1_G						-80.28	-82.83
		NR_FDD_FR1_H						-79.78	-82.33
	Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6		-50		-76.73		-77.19	-79.73
		NR_FDD_FR1_B						-76.69	-79.23
		NR_TDD_FR1_C						-76.19	-78.73
		NR_FDD_FR1_D NR_TDD_FR1_D						-75.69	-78.23
		NR_FDD_FR1_E NR_TDD_FR1_E						-75.19	-77.73
		NR_FDD_FR1_F						-74.69	-77.23
		NR_FDD_FR1_G						-74.19	-76.73
		NR_FDD_FR1_H						-73.69	-76.53
Propagation condition			-	AWGN	AWGN	AWGN	AWGN	AWGN	AWGN
Antenna configuration				1x2	1x2	1x2	1x2	1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3:	SS-RSRQ, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	NR operating band groups are as defined in clause 3.5.2.
Note 6:	The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

A.16.7.2.4.3 Test Requirements

The SS-RSRQ measurement accuracy shall fulfil the requirements in clause 10.1A.8.1.1 and 10.1A.8.1.2.

A.16.7.3 SS-SINR

A.16.7.3.1 SA intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell for 1 Rx UE

A.16.7.3.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1A.10.1.

A.16.7.3.1.2 Test parameters

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table A.16.7.3.1.2-1. The absolute accuracy of SS-SINR intra-frequency measurement is tested by using the parameters in Table A.16.7.3.1.2-2. In all test cases, Cell 1 is the PCell and Cell 2 is the target cell.

Table A.16.7.3.1.2-1: SS-SINR Intra frequency SS-SINR supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table A.16.7.3.1.2-2: SS-SINR Intra frequency test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1		freq1	
Duplex mode	Config 1,4		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1,4		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
Downlink initial BWP configuration			DLBWP.0.1			
Downlink dedicated BWP configuration			DLBWP.1.1			
Uplink initial BWP configuration			ULBWP.0.1			
Uplink dedicated BWP configuration			ULBWP.1.1			
DRX Cycle configuration		ms	Not Applicable			

TRS configuration	Config 1,4		TRS.1.1 FDD		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD		TRS.1.2 TDD	
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2		SR.1.1 TDD		SR.1.1 TDD	
	Config 3		SR.2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	-	CR.1.1 FDD	
	Config 2		CR.1.1 TDD		CR.1.1 TDD	
	Config 3		CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1,4		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns			OP.1			
SS-RSSI-Measurement			Not Applicable			
SMTC configuration	Config 1,4		SMTC.2			
	Config 2,3		SMTC.1			
Time offset with Cell 1	Config 1,4	ms	-	3	-	3
	Config 2,3	µs	-	3	-	3
SSB configuration	Config 1,2		SSB.1 FR1			
	Config 3		SSB.1 RedCap FR1			
PDSCH/PDCCH subcarrier spacing	Config 1,2,4	kHz	15			
	Config 3		30			
EPRE ratio of PSS to SSS		dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/15kHz	-93		-116	
	NR_FDD_FR1_B				-115.5	
	NR_TDD_FR1_C				-115	
	NR_FDD_FR1_D, NR_TDD_FR1_D				-114.5	
	NR_FDD_FR1_E, NR_TDD_FR1_E				-114	
	NR_FDD_FR1_F				-113.5	
	NR_FDD_FR1_G				-113	
	NR_FDD_FR1_H				-112.5	
N_{oc} Note2	Config 1,2,4	dBm/SCS	-93		Same as Noc for 15 kHz	

	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-90		-113	
		NR_FDD_FR1_B				-112.5	
		NR_TDD_FR1_C				-112	
		NR_FDD_FR1_D, NR_TDD_FR1_D				-111.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E				-111	
		NR_FDD_FR1_F				-110.5	
		NR_FDD_FR1_G				-110	
		NR_FDD_FR1_H				-109.5	
$\hat{E}_s / I_{ot}$			dB	0	-3.19	-5.46	-5.46
$\hat{E}_s / N_{oc}$			dB	4.54	2.66	-4	-4
SS-RSRP Note3	Config 1,2,4	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/SCS	-88.46	-90.34	-120	-120
		NR_FDD_FR1_B				-119.5	-119.5
		NR_TDD_FR1_C				-119	-119
		NR_FDD_FR1_D, NR_TDD_FR1_D				-118.5	-118.5
		NR_FDD_FR1_E, NR_TDD_FR1_E				-118	-118
		NR_FDD_FR1_F				-117.5	-117.5
		NR_FDD_FR1_G				-117	-117
		NR_FDD_FR1_H				-116.5	-116.5
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-85.46	-87.34	-117	-117
		NR_FDD_FR1_B				-116.5	-116.5
		NR_TDD_FR1_C				-116	-116
		NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5	-115.5
		NR_FDD_FR1_E, NR_TDD_FR1_E				-115	-115
		NR_FDD_FR1_F				-114.5	-114.5
		NR_FDD_FR1_G				-114	-114
		NR_FDD_FR1_H				-113.5	-113.5
SS-SINR Note3		NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dB	0	-3.19	-5.46	-5.46
		NR_FDD_FR1_B					
		NR_TDD_FR1_C					
		NR_FDD_FR1_D, NR_TDD_FR1_D					
		NR_FDD_FR1_E, NR_TDD_FR1_E					
		NR_FDD_FR1_F					
		NR_FDD_FR1_G					
		NR_FDD_FR1_H					
Io Note3	Config 1,2,4	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 9.36MHz	-57.5		-85.51	
		NR_FDD_FR1_B				-85.01	
		NR_TDD_FR1_C				-84.51	
		NR_FDD_FR1_D, NR_TDD_FR1_D				-84.01	
		NR_FDD_FR1_E, NR_TDD_FR1_E				-83.51	

		NR_FDD_FR1_F			-83.01
		NR_FDD_FR1_G			-82.51
		NR_FDD_FR1_H			-82.01
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 18.36MHz	-54.57	-82.57
		NR_FDD_FR1_B			-82.07
		NR_TDD_FR1_C			-81.57
		NR_FDD_FR1_D, NR_TDD_FR1_D			-81.07
		NR_FDD_FR1_E, NR_TDD_FR1_E			-81.07
		NR_FDD_FR1_F			-80.57
		NR_FDD_FR1_G			-80.07
		NR_FDD_FR1_H			-79.57
Propagation condition			-	AWGN	
Antenna configuration			-	1x1	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: NR operating band groups are as defined in clause 3.5.2.

Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

A.16.7.3.1.3 Test Requirements

The SS-SINR measurement accuracy shall fulfil the requirements in clause 10.1A.10.1.1 and 10.1A.10.1.2

A.16.7.3.2 SA intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell for 2 Rx UE

A.16.7.3.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1A.10.1.

A.16.7.3.2.2 Test parameters

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table A.16.7.3.2.2-1. The absolute accuracy of SS-SINR intra-frequency measurement is tested by using the parameters in Table A.16.7.3.2.22. In all test cases, Cell 1 is the PCell and Cell 2 is the target cell.

Table A.16.7.3.2.2-1: SS-SINR Intra frequency SS-SINR supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table A.16.7.3.2.2-2: SS-SINR Intra frequency test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1		freq1	
Duplex mode	Config 1,4		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1,4		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
Downlink initial BWP configuration			DLBWP.0.1			
Downlink dedicated BWP configuration			DLBWP.1.1			
Uplink initial BWP configuration			ULBWP.0.1			
Uplink dedicated BWP configuration			ULBWP.1.1			
DRX Cycle configuration		ms	Not Applicable			
TRS configuration	Config 1,4		TRS.1.1 FDD		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD		TRS.1.2 TDD	
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2		SR.1.1 TDD		SR.1.1 TDD	
	Config 3		SR.2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	-	CR.1.1 FDD	
	Config 2		CR.1.1 TDD		CR.1.1 TDD	
	Config 3		CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1,4		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns			OP.1			
SS-RSSI-Measurement			Not Applicable			
SMTC configuration	Config 1,4		SMTC.2			
	Config 2,3		SMTC.1			
Time offset with Cell 1	Config 1,4	ms	-	3	-	3
	Config 2,3	µs	-	3	-	3
SSB configuration	Config 1,2,4		SSB.1 FR1			
	Config 3		SSB.1 RedCap FR1			
PDSCH/PDCCH subcarrier spacing	Config 1,2,4	kHz	15			
	Config 3		30			
EPRE ratio of PSS to SSS		dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						

EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/15kHz	-93		-116	
		NR_FDD_FR1_B				-115.5	
		NR_TDD_FR1_C				-115	
		NR_FDD_FR1_D, NR_TDD_FR1_D				-114.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E				-114	
		NR_FDD_FR1_F				-113.5	
		NR_FDD_FR1_G				-113	
		NR_FDD_FR1_H				-112.5	
N_{oc} Note2	Config 1,2,4		dBm/SCS	-93		Same as Noc for 15 kHz	
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-90		-113	
		NR_FDD_FR1_B				-112.5	
		NR_TDD_FR1_C				-112	
		NR_FDD_FR1_D, NR_TDD_FR1_D				-111.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E				-111	
		NR_FDD_FR1_F				-110.5	
		NR_FDD_FR1_G				-110	
		NR_FDD_FR1_H				-109.5	
$\hat{E}_s / I_{ot}$			dB	0	-3.19	-5.46	-5.46
$\hat{E}_s / N_{oc}$			dB	4.54	2.66	-4	-4
SS-RSRP Note3	Config 1,2,4	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/SCS	-88.46	-90.34	-120	-120
		NR_FDD_FR1_B				-119.5	-119.5
		NR_TDD_FR1_C				-119	-119
		NR_FDD_FR1_D, NR_TDD_FR1_D				-118.5	-118.5
		NR_FDD_FR1_E, NR_TDD_FR1_E				-118	-118
		NR_FDD_FR1_F				-117.5	-117.5
		NR_FDD_FR1_G				-117	-117
		NR_FDD_FR1_H				-116.5	-116.5
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-85.46	-87.34	-117	-117
		NR_FDD_FR1_B				-116.5	-116.5
		NR_TDD_FR1_C				-116	-116
		NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5	-115.5
		NR_FDD_FR1_E, NR_TDD_FR1_E				-115	-115
		NR_FDD_FR1_F				-114.5	-114.5
		NR_FDD_FR1_G				-114	-114
		NR_FDD_FR1_H				-113.5	-113.5

SS-SINR Note3		NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dB	0	-3.19	-5.46	-5.46
		NR_FDD_FR1_B					
		NR_TDD_FR1_C					
		NR_FDD_FR1_D, NR_TDD_FR1_D					
		NR_FDD_FR1_E, NR_TDD_FR1_E					
		NR_FDD_FR1_F					
		NR_FDD_FR1_G					
		NR_FDD_FR1_H					
Io Note3	Config 1,2,4	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 9.36MHz	-57.5		-85.51	
		NR_FDD_FR1_B				-85.01	
		NR_TDD_FR1_C				-84.51	
		NR_FDD_FR1_D, NR_TDD_FR1_D				-84.01	
		NR_FDD_FR1_E, NR_TDD_FR1_E				-83.51	
		NR_FDD_FR1_F				-83.01	
		NR_FDD_FR1_G				-82.51	
		NR_FDD_FR1_H				-82.01	
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 18.36MHz	-54.57		-82.57	
		NR_FDD_FR1_B				-82.07	
		NR_TDD_FR1_C				-81.57	
		NR_FDD_FR1_D, NR_TDD_FR1_D				-81.07	
		NR_FDD_FR1_E, NR_TDD_FR1_E				-81.07	
		NR_FDD_FR1_F				-80.57	
		NR_FDD_FR1_G				-80.07	
		NR_FDD_FR1_H				-79.57	
Propagation condition			-	AWGN			
Antenna configuration			-	1x2			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: NR operating band groups are as defined in clause 3.5.2.

Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

A.16.7.3.3 SA Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell for 1 Rx UE

A.16.7.3.3.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1A.12.1.

A.16.7.3.3.2 Test parameters

In this test case the two cells (i.e., Cell 1 and Cell 2) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.16.7.3.3.2-1. Both absolute accuracy and relative accuracy requirements of SS-SINR inter-frequency measurement are tested by using test parameters in Table A.16.7.3.3.2-2. In all test cases, Cell 1 is the PCell and Cell 2 is target cell.

Table A.16.7.3.3.2-1: SS-SINR Intra frequency SS-SINR supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table A.16.7.3.3.2-2: SS-SINR Intra frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1	freq2	freq1	freq2	freq1	freq2
Duplex mode	Config 1,4		FDD					
	Config 2,3		TDD					
TDD configuration	Config 1,4		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
Downlink initial BWP configuration			DLBWP.0.1					
Downlink dedicated BWP configuration			DLBWP.1.1					
Uplink initial BWP configuration			ULBWP.0.1					
Uplink dedicated BWP configuration			ULBWP.1.1					
DRX Cycle configuration		ms	Not Applicable					
Gap pattern ID			0	-	0	-	0	-
TRS configuration	Config 1,4		TRS.1.1 FDD		TRS.1.1 FDD		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD		TRS.1.1 TDD		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD	
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3		SR2.1 TDD		SR2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	
	Config 2		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
	Config 3		CR2.1 TDD		CR2.1 TDD		CR2.1 TDD	
Dedicated CORESET Reference Channel	Config 1,4		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3		CCR2.1 TDD		CCR2.1 TDD		CCR2.1 TDD	

OCNG Patterns				OP.1							
SS-RSSI-Measurement				Not Applicable							
Time offset with Cell 1	Config 1,4		ms	-	3	-	3	-	3		
	Config 2,3		µs	-	3	-	3	-	3		
SMTC configuration	Config 1,4			SMTC pattern 2							
	Config 2,3			SMTC pattern 1							
SSB configuration	Config 1,2,4			SSB.1 FR1							
	Config 3			SSB.1 RedCap FR1							
PDSCH/PDCCH subcarrier spacing	Config 1,2,4		kHz	15							
	Config 3			30							
EPRE ratio of PSS to SSS			dB	0	0	0	0	0	0		
EPRE ratio of PBCH DMRS to SSS											
EPRE ratio of PBCH to PBCH DMRS											
EPRE ratio of PDCCH DMRS to SSS											
EPRE ratio of PDCCH to PDCCH DMRS											
EPRE ratio of PDSCH DMRS to SSS											
EPRE ratio of PDSCH to PDSCH											
EPRE ratio of OCNG DMRS to SSS(Note 1)											
EPRE ratio of OCNG to OCNG DMRS (Note 1)											
N_{oc} Note2	Config 1,2,4	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/15kHz	-88		-108.5		-119.5			
		NR_FDD_FR1_B						-119			
		NR_TDD_FR1_C						-118.5			
		NR_FDD_FR1_D NR_TDD_FR1_D						-118			
		NR_FDD_FR1_E NR_TDD_FR1_E						-117.5			
		NR_FDD_FR1_F						-117			
		NR_FDD_FR1_G						-116.5			
		NR_FDD_FR1_H						-116			
N_{oc} Note2	Config 1,2,4		dBm/SCS	-88		-108.5		Same as Noc for 15kHz			
	Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6		-85		-105.5		-116.5			
		NR_FDD_FR1_B						-116			
		NR_TDD_FR1_C						-115.5			
		NR_FDD_FR1_D NR_TDD_FR1_D						-115			
		NR_FDD_FR1_E NR_TDD_FR1_E						-114.5			
		NR_FDD_FR1_F						-114			
		NR_FDD_FR1_G						-114.5			
		NR_FDD_FR1_H						-113			
$\hat{E}_s / I_{ot}$			dB	-1.75	-1.75	20	20	-4.0	-4.0		
$\hat{E}_s / N_{oc}$			dB	-1.75		20		-4.0			

SS-RSRP Note3	Config 1,2,4	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/SCS	-89.75	-88.5	-123.5
		NR_FDD_FR1_B				-123
		NR_TDD_FR1_C				-122.5
		NR_FDD_FR1_D NR_TDD_FR1_D				-122
		NR_FDD_FR1_E NR_TDD_FR1_E				-121.5
		NR_FDD_FR1_F				-121
		NR_FDD_FR1_G				-120.5
		NR_FDD_FR1_H				-120
	Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6		-86.75	-85.5	-120.5
		NR_FDD_FR1_B				-120
		NR_TDD_FR1_C				-119.5
		NR_FDD_FR1_D NR_TDD_FR1_D				-119
		NR_FDD_FR1_E NR_TDD_FR1_E				-118.5
		NR_FDD_FR1_F				-118
		NR_FDD_FR1_G				-117.5
		NR_FDD_FR1_H				-117
SS-SINR Note3		NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dB	-1.75	20	-4.0
		NR_FDD_FR1_B				
		NR_TDD_FR1_C				
		NR_FDD_FR1_D NR_TDD_FR1_D				
		NR_FDD_FR1_E NR_TDD_FR1_E				
		NR_FDD_FR1_F				
		NR_FDD_FR1_G				
		NR_FDD_FR1_H				
Io Note3	Config 1,2,4	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/ 9.36MHz	-57.83	-60.5	-90.09
		NR_FDD_FR1_B				-89.59
		NR_TDD_FR1_C				-89.09
		NR_FDD_FR1_D NR_TDD_FR1_D				-88.59
		NR_FDD_FR1_E NR_TDD_FR1_E				-88.09
		NR_FDD_FR1_F				-87.59
		NR_FDD_FR1_G				-87.09
		NR_FDD_FR1_H				-86.59
	Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/ 18.36MHz	-54.87	-57.57	-87.97
		NR_FDD_FR1_B				-87.47
		NR_TDD_FR1_C				-86.97
		NR_FDD_FR1_D NR_TDD_FR1_D				-86.47
		NR_FDD_FR1_E NR_TDD_FR1_E				-85.97
		NR_FDD_FR1_F				-85.47
		NR_FDD_FR1_G				-84.97
		NR_FDD_FR1_H				-84.47

Propagation condition	-	AWGN
Antenna configuration	-	1x1

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: NR operating band groups are as defined in clause 3.5.2.
Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

A.16.7.3.3.3 Test Requirements

The SS-SINR measurement accuracy shall fulfil the requirements in clause 10.1A.12.1.1 and 10.1A.12.1.2.

A.16.7.3.4 SA Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell for 2 Rx UE

A.16.7.3.4.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1A.12.1.

A.16.7.3.4.2 Test parameters

In this test case the two cells (i.e., Cell 1 and Cell 2) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.16.7.3.4.2-1. Both absolute accuracy and relative accuracy requirements of SS-SINR inter-frequency measurement are tested by using test parameters in Table A.16.7.3.4.2-2. In all test cases, Cell 1 is the PCell and Cell 2 is target cell.

Table A.16.7.3.4.2-1: Intra frequency SS-SINR supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table A.16.7.3.4.2-2: SS-SINR Intra frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1	freq2	freq1	freq2	freq1	freq2
Duplex mode	Config 1,4		FDD					
	Config 2,3		TDD					
TDD configuration	Config 1,4		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
Downlink initial BWP configuration			DLBWP.0.1					
Downlink dedicated BWP configuration			DLBWP.1.1					
Uplink initial BWP configuration			ULBWP.0.1					

Uplink dedicated BWP configuration				ULBWP.1.1							
DRX Cycle configuration			ms	Not Applicable							
Gap pattern ID				0	-	0	-	0	-		
TRS configuration	Config 1,4			TRS.1.1 FDD		TRS.1.1 FDD		TRS.1.1 FDD			
	Config 2			TRS.1.1 TDD		TRS.1.1 TDD		TRS.1.1 TDD			
	Config 3			TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD			
PDSCH Reference measurement channel	Config 1,4			SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-		
	Config 2			SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD			
	Config 3			SR2.1 TDD		SR2.1 TDD		SR2.1 TDD			
RMSI CORESET Reference Channel	Config 1,4			CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD			
	Config 2			CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD			
	Config 3			CR2.1 TDD		CR2.1 TDD		CR2.1 TDD			
Dedicated CORESET Reference Channel	Config 1,4			CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-		
	Config 2			CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD			
	Config 3			CCR2.1 TDD		CCR2.1 TDD		CCR2.1 TDD			
OCNG Patterns				OP.1							
SS-RSSI-Measurement				Not Applicable							
Time offset with Cell 1	Config 1,4		ms	-	3	-	3	-	3		
	Config 2,3		µs	-	3	-	3	-	3		
SMTC configuration	Config 1,4			SMTC pattern 2							
	Config 2,3			SMTC pattern 1							
SSB configuration	Config 1,2,4			SSB.1 FR1							
	Config 3			SSB.1 RedCap FR1							
PDSCH/PDCCH subcarrier spacing	Config 1,2,4		kHz	15							
	Config 3			30							
EPRE ratio of PSS to SSS			dB	0	0	0	0	0	0		
EPRE ratio of PBCH DMRS to SSS											
EPRE ratio of PBCH to PBCH DMRS											
EPRE ratio of PDCCH DMRS to SSS											
EPRE ratio of PDCCH to PDCCH DMRS											
EPRE ratio of PDSCH DMRS to SSS											
EPRE ratio of PDSCH to PDSCH											
EPRE ratio of OCNG DMRS to SSS(Note 1)											
EPRE ratio of OCNG to OCNG DMRS (Note 1)											
N_{oc} Note2	Config 1,2,4	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/15kHz	-88		-108.5		-119.5			
		NR_FDD_FR1_B						-119			
		NR_TDD_FR1_C						-118.5			
		NR_FDD_FR1_D NR_TDD_FR1_D						-118			
		NR_FDD_FR1_E NR_TDD_FR1_E						-117.5			

		NR_FDD_FR1_F								-117
		NR_FDD_FR1_G								-116.5
		NR_FDD_FR1_H								-116
N_{oc} Note2	Config 1,2,4		dBm/SCS	-88		-108.5		Same as Noc for 15kHz		
	Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6		-85		-105.5		-116.5		
		NR_FDD_FR1_B						-116		
		NR_TDD_FR1_C						-115.5		
		NR_FDD_FR1_D NR_TDD_FR1_D						-115		
		NR_FDD_FR1_E NR_TDD_FR1_E						-114.5		
		NR_FDD_FR1_F						-114		
		NR_FDD_FR1_G						-114.5		
		NR_FDD_FR1_H						-113		
$\hat{E}_s / I_{ot}$			dB	-1.75	-1.75	20	20	-4.0	-4.0	
$\hat{E}_s / N_{oc}$			dB	-1.75		20		-4.0		
SS-RSRP Note3	Config 1,2,4	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/SCS	-89.75		-88.5		-123.5		
		NR_FDD_FR1_B						-123		
		NR_TDD_FR1_C						-122.5		
		NR_FDD_FR1_D NR_TDD_FR1_D						-122		
		NR_FDD_FR1_E NR_TDD_FR1_E						-121.5		
		NR_FDD_FR1_F						-121		
		NR_FDD_FR1_G						-120.5		
		NR_FDD_FR1_H						-120		
	Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6		-86.75		-85.5		-120.5		
		NR_FDD_FR1_B						-120		
		NR_TDD_FR1_C						-119.5		
		NR_FDD_FR1_D NR_TDD_FR1_D						-119		
		NR_FDD_FR1_E NR_TDD_FR1_E						-118.5		
		NR_FDD_FR1_F						-118		
		NR_FDD_FR1_G						-117.5		
		NR_FDD_FR1_H						-117		
SS-SINR Note3		NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dB	-1.75		20		-4.0		
		NR_FDD_FR1_B								
		NR_TDD_FR1_C								
		NR_FDD_FR1_D NR_TDD_FR1_D								
		NR_FDD_FR1_E								

		NR_TDD_FR1_E				
		NR_FDD_FR1_F				
		NR_FDD_FR1_G				
		NR_FDD_FR1_H				
Io[Note3]	Config 1,2,4	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/ 9.36MHz	-57.83	-60.5	-90.09
		NR_FDD_FR1_B				-89.59
		NR_TDD_FR1_C				-89.09
		NR_FDD_FR1_D NR_TDD_FR1_D				-88.59
		NR_FDD_FR1_E NR_TDD_FR1_E				-88.09
		NR_FDD_FR1_F				-87.59
		NR_FDD_FR1_G				-87.09
		NR_FDD_FR1_H				-86.59
	Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/ 18.36MHz	-54.87	-57.57	-87.97
		NR_FDD_FR1_B				-87.47
		NR_TDD_FR1_C				-86.97
		NR_FDD_FR1_D NR_TDD_FR1_D				-86.47
		NR_FDD_FR1_E NR_TDD_FR1_E				-85.97
		NR_FDD_FR1_F				-85.47
		NR_FDD_FR1_G				-84.97
		NR_FDD_FR1_H				-84.47
Propagation condition			-	AWGN		
Antenna configuration			-	1x2		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: NR operating band groups are as defined in clause 3.5.2.

Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

A.16.7.3.4.3 Test Requirements

The SS-SINR measurement accuracy shall fulfil the requirements in clause 10.1A.12.1.1 and 10.1A.12.1.2.

A.16.7.4 L1-RSRP measurement for beam reporting

A.16.7.4.1 SSB based L1-RSRP measurement for 1 Rx UE

A.16.7.4.2 SSB based L1-RSRP measurement for 2 Rx UE

A.16.7.4.3 CSI-RS based L1-RSRP measurement on resource set with repetition off for 1 Rx UE

A.16.7.4.4 CSI-RS based L1-RSRP measurement on resource set with repetition off for 2 Rx UE

A.16.7.5 E-UTRAN RSRP

A.16.7.5.1 SA: inter-RAT measurement accuracy with FR1 serving cell for 1 Rx UE

A.16.7.5.1.1 Test Purpose and Environment

The purpose of this test is to verify that the E-UTRAN RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clause 9.4A.2 and 9.4A.3 for SA inter-RAT E-UTRAN RSRP measurements.

A.16.7.5.1.2 Test parameters

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the NR PCell and Cell 2 is an E-UTRAN inter-RAT neighbour cell. Supported test configurations are shown in table A.16.7.5.1.2-1. The measurement accuracy of SA inter-RAT E-UTRAN RSRP are tested by using the parameters in A.16.7.5.1.2-2 and A.16.7.5.1.2-3.

Table A.16.7.5.1.2-1: Inter-RAT E-UTRAN RSRP supported test configurations with FR1 serving cell

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, E-UTRAN FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, E-UTRAN FDD
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, E-UTRAN FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, E-UTRAN TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, E-UTRAN TDD
6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, E-UTRAN TDD
7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode. E-UTRAN FDD
8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode. E-UTRAN TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.7.5.1.2-2: NR Cell specific test parameters for SA Inter-RAT E-UTRAN RSRP test parameters

Parameter		Unit	Cell 1
NR RF channel number			1
Duplex mode	Config 1, 4,7,8		FDD
	Config 2, 3, 5, 6		TDD
TDD Configuration	Config 1, 4		N/A
	Config 2, 5		TDDConf.1.1
	Config 3, 6		TDDConf.2.1
$BW_{channel}$	Config 1, 4	MHz	10: $N_{RB,c}$ = 52 (FDD)
	Config 2, 5		10: $N_{RB,c}$ = 52 (TDD)
	Config 3, 6		20: $N_{RB,c}$ = 51 (TDD)
Gap pattern Id			0

PDSCH reference measurement channel	Config 1, 4,7,8		SR.1.1 FDD
	Config 2, 5		SR.1.1 TDD
	Config 3, 6		SR.2.1 TDD
RMSI CORSET reference channel	Config 1, 4,7,8		CR.1.1 FDD
	Config 2, 5		CR.1.1 TDD
	Config 3, 6		CR.2.1 TDD
Dedicated CORSET reference channel	Config 1, 4,7,8		CCR.1.1 FDD
	Config 2, 5		CCR.1.1 TDD
	Config 3, 6		CCR.2.1 TDD
CSI-RS for tracking	Config 1, 4,7,8		TRS.1.1 FDD
	Config 2, 5		TRS.1.1 TDD
	Config 3, 6		TRS.1.2 TDD
BWP configurations	Initial DL BWP		DLBWP.0.1
	Dedicated DL BWP		DLBWP.1.1
	Initial UL BWP		ULBWP.0.1
	Dedicated UL BWP		ULBWP.1.1
OCNG pattern[Note1]			OP.1
SMTC configuration			SMTC.1
SSB configuration	Config 1, 2, 4, 5,7,8		SSB.1 FR1
	Config 3, 6		SSB.1 RedCap FR1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH_DMRS to SSS			
EPRE ratio of PBCH to PBCH_DMRS			
EPRE ratio of PDCCH_DMRS to SSS			
EPRE ratio of PDCCH to PDCCH_DMRS			
EPRE ratio of PDSCH_DMRS to SSS			
EPRE ratio of PDSCH to PDSCH_DMRS			
EPRE ratio of OCNG DMRS to SSS			
EPRE ratio of OCNG to OCNG DMRS			
N_{oc}[Note2]		dBm/15 kHz	-104
N_{oc}[Note2]	Config 1, 2, 4, 5,7,8	dBm/SCS	-104
	Config 3, 6		-101
$\hat{E}_s/N_{oc}$		dB	17
$\hat{E}_s/I_{ot}$[Note3]		dB	17
SS-RSRP[Note3]	Config 1, 2, 4, 5,7,8	dBm/SCS	-87
	Config 3, 6		-84
SSB_RP[Note3]	Config 1, 2, 4, 5,7,8	dBm/SCS	-87
	Config 3, 6		-84
Io[Note3]	Config 1, 2, 4, 5,7,8	dBm/9.36 MHz	-58.96
	Config 3, 6	dBm/18.36 MHz	-56.03
Propagation condition			AWGN
Antenna Configuration and Correlation Matrix			1x1

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.16.7.5.1.2-3: E-UTRAN Cell specific test parameters for SA Inter-RAT E-UTRAN RSRP test parameters

Parameter		Unit	Cell 2	
			Test 1	Test 2
E-UTRA RF channel number			1	
Duplex mode	Config 1, 2, 3, 7		FDD	
	Config 4, 5, 6, 8		TDD	
TDD special subframe configuration[Note1]	Config 1, 2, 3, 7		N/A	
	Config 4, 5, 6, 8		6	
TDD uplink-downlink configuration[Note1]	Config 1, 2, 3, 7		N/A	
	Config 4, 5, 6, 8		1	
$BW_{channel}$		MHz	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note2]			-	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]	Config 1, 2, 3, 7		5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
	Config 4, 5, 6, 8		5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]	Config 1, 2, 3, 7		5 MHz: OP.19 FDD 10 MHz: OP.6 FDD 20 MHz: OP.14 FDD	
	Config 4, 5, 6 ,8		5 MHz: OP.10 TDD 10 MHz: OP.2 TDD 20 MHz: OP.8 TDD	
PBCH_RA		dB	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note3]				
OCNG_RB[Note3]				
N_{oc}[Note4]	Bands FDD_A [Note 9], TDD_A	dBm/15kHz	-91.65	-117
	Bands FDD_B1, FDD_B2 [Note 10]			-116.5
	Bands FDD_C, TDD_C			-116
	Bands FDD_D			-115.5
	Bands FDD_E, FDD_F [Note 7], TDD_E			-115
	Bands FDD_G [Note 8]			-114
	Bands FDD_H			-113.5
$\hat{E}_s/N_{oc}$		dB	10	-4
$\hat{E}_s/I_{ot}$[Note5]		dB	10	-4

RSRP Note5	Bands FDD_A Note 9, TDD_A	dBm/15kHz	-81.65	-121
	Bands FDD_B1, FDD_B2 Note 10			-120.5
	Bands FDD_C, TDD_C			-120
	Bands FDD_D			-119.5
	Bands FDD_E, FDD_F Note 7, TDD_E			-119
	Bands FDD_G Note 8			-118
	Bands FDD_H			-117.5
SCH_RP Note5	Bands FDD_A Note 9, TDD_A	dBm/15kHz	-81.65	-121
	Bands FDD_B1, FDD_B2 Note 10			-120.5
	Bands FDD_C, TDD_C			-120
	Bands FDD_D			-119.5
	Bands FDD_E, FDD_F Note 7, TDD_E			-119
	Bands FDD_G Note 8			-118
	Bands FDD_H			-117.5
Io Note5	Bands FDD_A Note 9, TDD_A	dBm/Ch BW	-53.45 + 10log($N_{RB,c}$/50)	-87.76 + 10log($N_{RB,c}$/50)
	Bands FDD_B1, FDD_B2 Note 10			-87.26 + 10log($N_{RB,c}$/50)
	Bands FDD_C, TDD_C			-86.76 + 10log($N_{RB,c}$/50)
	Bands FDD_D			-86.26 + 10log($N_{RB,c}$/50)
	Bands FDD_E, FDD_F Note 7, TDD_E			-85.76 + 10log($N_{RB,c}$/50)
	Bands FDD_G Note 8			-84.76 + 10log($N_{RB,c}$/50)
	Bands FDD_H			-84.26 + 10log($N_{RB,c}$/50)
Propagation Condition			AWGN	
Antenna Configuration and Correlation Matrix			1x1	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 6: E-UTRA operating band groups are as defined in clause 3.5 of TS 36.133 [15].
Note 7: For Band 26, the tests shall be performed with the carrier frequency of assigned E-UTRA channel bandwidth within 865-894 MHz.
Note 8: Except Band 29.
Note 9: Except Band 32, Band 75 and Band 76.
Note 10: For Band 74, the tests shall be performed with the carrier frequency of the assigned E-UTRA channel bandwidth within 1475.9-1510.9 MHz.

A.16.7.5.1.3 Test Requirements

The SA inter-RAT E-UTRAN RSRP measurement accuracy for cell 2 shall fulfil absolute requirement in clause 9.4A.2 and 9.4A.3.

A.16.7.5.2 SA: inter-RAT measurement accuracy with FR1 serving cell for 2 Rx UE

A.16.7.5.2.1 Test Purpose and Environment

The purpose of this test is to verify that the E-UTRAN RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clause 9.4A.2 and 9.4A.3 for SA inter-RAT E-UTRAN RSRP measurements.

A.16.7.5.2.2 Test parameters

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the NR PCell and Cell 2 is an E-UTRAN inter-RAT neighbour cell. Supported test configurations are shown in table A.16.7.5.2.2-1. The measurement accuracy of SA inter-RAT E-UTRAN RSRP are tested by using the parameters in A.16.7.5.2.2-2 and A.16.7.5.2.2-3.

Table A.16.7.5.2.2-1: Inter-RAT E-UTRAN RSRP supported test configurations with FR1 serving cell

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, E-UTRAN FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, E-UTRAN FDD
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, E-UTRAN FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, E-UTRAN TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, E-UTRAN TDD
6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, E-UTRAN TDD
7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode. E-UTRAN FDD
8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode. E-UTRAN TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.7.5.2.2-2: NR Cell specific test parameters for SA Inter-RAT E-UTRAN RSRP test parameters

Parameter		Unit	Cell 1
NR RF channel number			1
Duplex mode	Config 1, 4,7,8		FDD
	Config 2, 3, 5, 6		TDD
TDD Configuration	Config 1, 4		N/A
	Config 2, 5		TDDConf.1.1
	Config 3, 6		TDDConf.2.1
$BW_{channel}$	Config 1, 4	MHz	10: $N_{RB,c}$ = 52 (FDD)
	Config 2, 5		10: $N_{RB,c}$ = 52 (TDD)
	Config 3, 6		20: $N_{RB,c}$ = 51 (TDD)
Gap pattern Id			0
PDSCH reference measurement channel	Config 1, 4,7,8		SR.1.1 FDD
	Config 2, 5		SR.1.1 TDD
	Config 3, 6		SR.2.1 TDD
RMSI CORSET reference channel	Config 1, 4,7,8		CR.1.1 FDD
	Config 2, 5		CR.1.1 TDD
	Config 3, 6		CR.2.1 TDD
Dedicated CORSET reference channel	Config 1, 4,7,8		CCR.1.1 FDD
	Config 2, 5		CCR.1.1 TDD
	Config 3, 6		CCR.2.1 TDD
CSI-RS for tracking	Config 1, 4,7,8		TRS.1.1 FDD
	Config 2, 5		TRS.1.1 TDD
	Config 3, 6		TRS.1.2 TDD
BWP configurations	Initial DL BWP		DLBWP.0.1
	Dedicated DL BWP		DLBWP.1.1

	Initial UL BWP		ULBWP.0.1
	Dedicated UL BWP		ULBWP.1.1
OCNG pattern[Note1]			OP.1
SMTC configuration			SMTC.1
SSB configuration	Config 1, 2, 4, 5,7,8		SSB.1 FR1
	Config 3, 6		SSB.1 RedCap FR1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH_DMRS to SSS			
EPRE ratio of PBCH to PBCH_DMRS			
EPRE ratio of PDCCH_DMRS to SSS			
EPRE ratio of PDCCH to PDCCH_DMRS			
EPRE ratio of PDSCH_DMRS to SSS			
EPRE ratio of PDSCH to PDSCH_DMRS			
EPRE ratio of OCNG DMRS to SSS			
EPRE ratio of OCNG to OCNG DMRS			
N_{oc}[Note2]		dBm/15 kHz	-104
N_{oc}[Note2]	Config 1, 2, 4, 5,7,8	dBm/SCS	-104
	Config 3, 6		-101
$\hat{E}_s/N_{oc}$		dB	17
$\hat{E}_s/I_{ot}$[Note3]		dB	17
SS-RSRP[Note3]	Config 1, 2, 4, 5,7,8	dBm/SCS	-87
	Config 3, 6		-84
SSB_RP[Note3]	Config 1, 2, 4, 5,7,8	dBm/SCS	-87
	Config 3, 6		-84
Io[Note3]	Config 1, 2, 4, 5,7,8	dBm/9.36 MHz	-58.96
	Config 3, 6	dBm/18.36 MHz	-56.03
Propagation condition			AWGN
Antenna Configuration and Correlation Matrix			1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.16.7.5.2.2-3: E-UTRAN Cell specific test parameters for SA Inter-RAT E-UTRAN RSRP test parameters

Parameter		Unit	Cell 2	
			Test 1	Test 2
E-UTRA RF channel number			1	
Duplex mode	Config 1, 2, 3, 7		FDD	
	Config 4, 5, 6, 8		TDD	
TDD special subframe configuration[Note1]	Config 1, 2, 3, 7		N/A	
	Config 4, 5, 6, 8		6	
TDD uplink-downlink configuration[Note1]	Config 1, 2, 3, 7		N/A	
	Config 4, 5, 6, 8		1	
$BW_{channel}$		MHz	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50	

			20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note2]			-	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]	Config 1, 2, 3, 7		5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
	Config 4, 5, 6, 8		5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]	Config 1, 2, 3, 7		5 MHz: OP.19 FDD 10 MHz: OP.6 FDD 20 MHz: OP.14 FDD	
	Config 4, 5, 6 ,8		5 MHz: OP.10 TDD 10 MHz: OP.2 TDD 20 MHz: OP.8 TDD	
PBCH_RA		dB	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note3]				
OCNG_RB[Note3]				
N_{oc}[Note4]	Bands FDD_A [Note 9], TDD_A	dBm/15kHz	-91.65	-117
	Bands FDD_B1, FDD_B2 [Note 10]			-116.5
	Bands FDD_C, TDD_C			-116
	Bands FDD_D			-115.5
	Bands FDD_E, FDD_F [Note 7], TDD_E			-115
	Bands FDD_G [Note 8]			-114
	Bands FDD_H			-113.5
$\hat{E}_s/N_{oc}$		dB	10	-4
$\hat{E}_s/I_{ot}$[Note5]		dB	10	-4
RSRP[Note5]	Bands FDD_A [Note 9], TDD_A	dBm/15kHz	-81.65	-121
	Bands FDD_B1, FDD_B2 [Note 10]			-120.5
	Bands FDD_C, TDD_C			-120
	Bands FDD_D			-119.5
	Bands FDD_E, FDD_F [Note 7], TDD_E			-119
	Bands FDD_G [Note 8]			-118
	Bands FDD_H			-117.5
SCH_RP[Note5]	Bands FDD_A [Note 9], TDD_A	dBm/15kHz	-81.65	-121
	Bands FDD_B1, FDD_B2 [Note 10]			-120.5
	Bands FDD_C, TDD_C			-120
	Bands FDD_D			-119.5
	Bands FDD_E, FDD_F [Note 7], TDD_E			-119

	Bands FDD_G Note 8			-118
	Bands FDD_H			-117.5
Io^{Note5}	Bands FDD_A Note 9, TDD_A	dBm/Ch BW	-53.45 + 10log($N_{RB,c}$/50)	-87.76 + 10log($N_{RB,c}$/50)
	Bands FDD_B1, FDD_B2 Note 10			-87.26 + 10log($N_{RB,c}$/50)
	Bands FDD_C, TDD_C			-86.76 + 10log($N_{RB,c}$/50)
	Bands FDD_D			-86.26 + 10log($N_{RB,c}$/50)
	Bands FDD_E, FDD_F Note 7, TDD_E			-85.76 + 10log($N_{RB,c}$/50)
	Bands FDD_G Note 8			-84.76 + 10log($N_{RB,c}$/50)
	Bands FDD_H			-84.26 + 10log($N_{RB,c}$/50)
Propagation Condition			AWGN	
Antenna Configuration and Correlation Matrix			1x2	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 6: E-UTRA operating band groups are as defined in clause 3.5 of TS 36.133 [15].
Note 7: For Band 26, the tests shall be performed with the carrier frequency of assigned E-UTRA channel bandwidth within 865-894 MHz.
Note 8: Except Band 29.
Note 9: Except Band 32, Band 75 and Band 76.
Note 10: For Band 74, the tests shall be performed with the carrier frequency of the assigned E-UTRA channel bandwidth within 1475.9-1510.9 MHz.

A.16.7.5.2.3 Test Requirements

The SA inter-RAT E-UTRAN RSRP measurement accuracy for cell 2 shall fulfil absolute requirement in clause 9.4A.2 and 9.4A.3.

A.16.7.6 E-UTRAN RSRQ

A.16.7.6.1 SA: inter-RAT measurement accuracy with FR1 serving cell for 1 Rx UE

A.16.7.6.1.1 Test Purpose and Environment

The purpose of this test is to verify that the E-UTRAN RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in clause 9.4A.2 and 9.4A.3 for SA inter-RAT E-UTRAN RSRQ measurements.

A.16.7.6.1.2 Test parameters

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the NR PCell and Cell 2 is an E-UTRAN inter-RAT neighbour cell. Supported test configurations are shown in table A.16.7.6.1.2-1. The measurement accuracy of SA inter-RAT E-UTRAN RSRQ are tested by using the parameters in A.16.7.6.1.2-2 and A.16.7.6.1.2-3.

Table A.16.7.6.1.2-1: Inter-RAT E-UTRAN RSRQ supported test configurations with FR1 serving cell

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, E-UTRAN FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, E-UTRAN FDD
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, E-UTRAN FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, E-UTRAN TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, E-UTRAN TDD
6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, E-UTRAN TDD
7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode. E-UTRAN FDD
8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode. E-UTRAN TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.7.6.1.2-2: NR Cell specific test parameters for SA Inter-RAT E-UTRAN RSRQ test parameters

Parameter		Unit	Cell 1
NR RF channel number			1
Duplex mode	Config 1, 4, 7, 8		FDD
	Config 2, 3, 5, 6		TDD
TDD Configuration	Config 1, 4, 7, 8		N/A
	Config 2, 5		TDDConf.1.1
	Config 3, 6		TDDConf.2.1
$BW_{channel}$	Config 1, 4	MHz	10: $N_{RB,c}$ = 52 (FDD)
	Config 2, 5		10: $N_{RB,c}$ = 52 (TDD)
	Config 3, 6		20: $N_{RB,c}$ = 51 (TDD)
Gap pattern Id			0
PDSCH reference measurement channel	Config 1, 4, 7, 8		SR.1.1 FDD
	Config 2, 5		SR.1.1 TDD
	Config 3, 6		SR.2.1 TDD
RMSI CORSET reference channel	Config 1, 4, 7, 8		CR.1.1 FDD
	Config 2, 5		CR.1.1 TDD
	Config 3, 6		CR.2.1 TDD
Dedicated CORSET reference channel	Config 1, 4, 7, 8		CCR.1.1 FDD
	Config 2, 5		CCR.1.1 TDD
	Config 3, 6		CCR.2.1 TDD
CSI-RS for tracking	Config 1, 4, 7, 8		TRS.1.1 FDD
	Config 2, 5		TRS.1.1 TDD
	Config 3, 6		TRS.1.2 TDD
BWP configurations	Initial DL BWP		DLBWP.0.1
	Dedicated DL BWP		DLBWP.1.1
	Initial UL BWP		ULBWP.0.1
	Dedicated UL BWP		ULBWP.1.1
OCNG pattern[Note1]			OP.1
SMTC configuration			SMTC.1
SSB configuration	Config 1, 2, 4, 5, 7, 8		SSB.1 FR1
	Config 3, 6		SSB.1 RedCap FR1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH_DMRS to SSS			
EPRE ratio of PBCH to PBCH_DMRS			
EPRE ratio of PDCCH_DMRS to SSS			
EPRE ratio of PDCCH to PDCCH_DMRS			

EPRE ratio of PDSCH_DMRS to SSS			
EPRE ratio of PDSCH to PDSCH_DMRS			
EPRE ratio of OCNG DMRS to SSS			
EPRE ratio of OCNG to OCNG DMRS			
N_{oc} Note2		dBm/15 kHz	-104
N_{oc} Note2	Config 1, 2, 4, 5	dBm/SCS	-104
	Config 3, 6		-101
$\hat{E}_s/N_{oc}$		dB	dB
$\hat{E}_s/I_{ot}$ Note3		dB	dB
SS-RSRQ Note3	Config 1, 2, 4, 5	dBm/SCS	-87
	Config 3, 6		-84
SSB_RP Note3	Config 1, 2, 4, 5	dBm/SCS	-87
	Config 3, 6		-84
Io Note3	Config 1, 2, 4, 5	dBm/9.36 MHz	-58.96
	Config 3, 6	dBm/18.36 MHz	-56.03
Propagation condition			AWGN
Antenna Configuration and Correlation Matrix			1x1

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: $\hat{E}_s/I_{ot}$, SS-RSRQ, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.16.7.6.1.2-3: E-UTRAN Cell specific test parameters for SA Inter-RAT E-UTRAN RSRQ test parameters

Parameter		Unit	Cell 2		
			Test 1	Test 2	Test 3
E-UTRA RF channel number			1		
Duplex mode	Config 1, 2, 3, 7		FDD		
	Config 4, 5, 6, 8		TDD		
TDD special subframe configuration Note1	Config 1, 2, 3, 7		N/A		
	Config 4, 5, 6, 8		6		
TDD uplink-downlink configuration Note1	Config 1, 2, 3, 7		N/A		
	Config 4, 5, 6, 8		1		
$BW_{channel}$		MHz	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100		
PDSCH parameters: DL Reference Measurement Channel Note2			-		
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel Note2	Config 1, 2, 3, 7		5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD		
	Config 4, 5, 6, 8		5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD		
OCNG Patterns Note2	Config 1, 2, 3, 7		5 MHz: OP.19 FDD 10 MHz: OP.6 FDD 20 MHz: OP.14 FDD		
	Config 4, 5, 6, 8		5 MHz: OP.10 TDD 10 MHz: OP.2 TDD 20 MHz: OP.8 TDD		

PBCH_RA		dB	0		
PBCH_RB					
PSS_RA					
SSS_RA					
PCFICH_RB					
PHICH_RA					
PHICH_RB					
PDCCH_RA					
PDCCH_RB					
PDSCH_RA					
PDSCH_RB					
OCNG_RA Note3					
OCNG_RB Note3					
N_{oc} Note4	Bands FDD_A Note 9, TDD_A	dBm/15kHz	-83	-104.70	-119.5
	Bands FDD_B1, FDD_B2 Note 10				-119
	Bands FDD_C, TDD_C				-118.5
	Bands FDD_D				-118
	Bands FDD_E, FDD_F Note 7, TDD_E				-117.5
	Bands FDD_G Note 8				-116.5
	Bands FDD_H				-116
$\hat{E}_s/N_{oc}$		dB	-1.75	-4.0	-4.0
$\hat{E}_s/I_{ot}$ Note5		dB	-1.75	-4.0	-4.0
RSRP Note5	Bands FDD_A Note 9, TDD_A	dBm/15kHz	-84.75	-108.70	-123.5
	Bands FDD_B1, FDD_B2 Note 10				-123
	Bands FDD_C, TDD_C				-122.5
	Bands FDD_D				-122
	Bands FDD_E, FDD_F Note 7, TDD_E				-121.5
	Bands FDD_G Note 8				-120.5
	Bands FDD_H				-120
RSRQ Note5	Bands FDD_A Note 9, TDD_A	dB	-14.76	-16.25	-16.25
	Bands FDD_B1, FDD_B2 Note 10				
	Bands FDD_C, TDD_C				
	Bands FDD_D				
	Bands FDD_E, FDD_F Note 7, TDD_E				
	Bands FDD_G Note 8				
	Bands FDD_H				
Io Note5	Bands FDD_A Note 9, TDD_A	dBm/Ch BW	-53 + 10log($N_{RB,c}$/50)	-75.46 + 10log($N_{RB,c}$/50)	-90.26 + 10log($N_{RB,c}$/50)
	Bands FDD_B1, FDD_B2 Note 10				-89.76 + 10log($N_{RB,c}$/50)
	Bands FDD_C, TDD_C				-89.26 + 10log($N_{RB,c}$/50)
	Bands FDD_D				-88.76 + 10log($N_{RB,c}$/50)

	Bands FDD_E, FDD_F Note 7, TDD_E				-88.26 + 10log($N_{RB,c}$ /50)
	Bands FDD_G Note 8				-87.26 + 10log($N_{RB,c}$ /50)
	Bands FDD_H				-86.76 + 10log($N_{RB,c}$ /50)
Propagation Condition			AWGN		
Antenna Configuration and Correlation Matrix			1x1		

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, RSRQ and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 6: E-UTRA operating band groups are as defined in clause 3.5 of TS 36.133 [15].
Note 7: For Band 26, the tests shall be performed with the carrier frequency of assigned E-UTRA channel bandwidth within 865-894 MHz.
Note 8: Except Band 29.
Note 9: Except Band 32, Band 75 and Band 76.
Note 10: For Band 74, the tests shall be performed with the carrier frequency of the assigned E-UTRA channel bandwidth within 1475.9-1510.9 MHz.

A.16.7.6.1.3 Test Requirements

The SA inter-RAT E-UTRAN RSRQ measurement accuracy for cell 2 shall fulfil absolute requirement in clause 9.4A.2 and 9.4A.3.

A.16.7.6.2 SA: inter-RAT measurement accuracy with FR1 serving cell for 2 Rx UE

A.16.7.6.2.1 Test Purpose and Environment

The purpose of this test is to verify that the E-UTRAN RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in clause 9.4A.2 and 9.4A.3 for SA inter-RAT E-UTRAN RSRQ measurements.

A.16.7.6.2.2 Test parameters

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the NR PCell and Cell 2 is an E-UTRAN inter-RAT neighbour cell. Supported test configurations are shown in table A.16.7.6.2.2-1. The measurement accuracy of SA inter-RAT E-UTRAN RSRQ are tested by using the parameters in A.16.7.6.2.22-2 and A.16.7.6.2.2-3.

Table A.16.7.6.2.2-1: Inter-RAT E-UTRAN RSRQ supported test configurations with FR1 serving cell

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, E-UTRAN FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, E-UTRAN FDD
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, E-UTRAN FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, E-UTRAN TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, E-UTRAN TDD
6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, E-UTRAN TDD
7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode. E-UTRAN FDD

8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode. E-UTRAN TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.7.6.2.2-2: NR Cell specific test parameters for SA Inter-RAT E-UTRAN RSRQ test parameters

Parameter		Unit	Cell 1
NR RF channel number			1
Duplex mode	Config 1, 4, 7, 8		FDD
	Config 2, 3, 5, 6		TDD
TDD Configuration	Config 1, 4, 7, 8		N/A
	Config 2, 5		TDDConf.1.1
	Config 3, 6		TDDConf.2.1
$BW_{channel}$	Config 1, 4	MHz	10: $N_{RB,c}$ = 52 (FDD)
	Config 2, 5		10: $N_{RB,c}$ = 52 (TDD)
	Config 3, 6		20: $N_{RB,c}$ = 51 (TDD)
Gap pattern Id			0
PDSCH reference measurement channel	Config 1, 4, 7, 8		SR.1.1 FDD
	Config 2, 5		SR.1.1 TDD
	Config 3, 6		SR.2.1 TDD
RMSI CORSET reference channel	Config 1, 4, 7, 8		CR.1.1 FDD
	Config 2, 5		CR.1.1 TDD
	Config 3, 6		CR.2.1 TDD
Dedicated CORSET reference channel	Config 1, 4, 7, 8		CCR.1.1 FDD
	Config 2, 5		CCR.1.1 TDD
	Config 3, 6		CCR.2.1 TDD
CSI-RS for tracking	Config 1, 4, 7, 8		TRS.1.1 FDD
	Config 2, 5		TRS.1.1 TDD
	Config 3, 6		TRS.1.2 TDD
BWP configurations	Initial DL BWP		DLBWP.0.1
	Dedicated DL BWP		DLBWP.1.1
	Initial UL BWP		ULBWP.0.1
	Dedicated UL BWP		ULBWP.1.1
OCNG pattern[Note1]			OP.1
SMTC configuration			SMTC.1
SSB configuration	Config 1, 2, 4, 5, 7, 8		SSB.1 FR1
	Config 3, 6		SSB.1 RedCap FR1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH_DMRS to SSS			
EPRE ratio of PBCH to PBCH_DMRS			
EPRE ratio of PDCCH_DMRS to SSS			
EPRE ratio of PDCCH to PDCCH_DMRS			
EPRE ratio of PDSCH_DMRS to SSS			
EPRE ratio of PDSCH to PDSCH_DMRS			
EPRE ratio of OCNG DMRS to SSS			
EPRE ratio of OCNG to OCNG DMRS			
N_{oc}[Note2]		dBm/15 kHz	-104
N_{oc}[Note2]	Config 1, 2, 4, 5	dBm/SCS	-104
	Config 3, 6		-101
$\hat{E}_s/N_{oc}$		dB	dB
$\hat{E}_s/I_{ot}$[Note3]		dB	dB
SS-RSRQ[Note3]	Config 1, 2, 4, 5	dBm/SCS	-87
	Config 3, 6		-84
SSB_RP[Note3]	Config 1, 2, 4, 5	dBm/SCS	-87

	Config 3, 6		-84
Io[Note3]	Config 1, 2, 4, 5	dBm/9.36 MHz	-58.96
	Config 3, 6	dBm/18.36 MHz	-56.03
Propagation condition			AWGN
Antenna Configuration and Correlation Matrix			1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 3: $\hat{E}_s/I_{ot}$, SS-RSRQ, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			

Table A.16.7.6.2.2-3: E-UTRAN Cell specific test parameters for SA Inter-RAT E-UTRAN RSRQ test parameters

Parameter		Unit	Cell 2		
			Test 1	Test 2	Test 3
E-UTRA RF channel number			1		
Duplex mode	Config 1, 2, 3, 7		FDD		
	Config 4, 5, 6, 8		TDD		
TDD special subframe configuration[Note1]	Config 1, 2, 3, 7		N/A		
	Config 4, 5, 6, 8		6		
TDD uplink-downlink configuration[Note1]	Config 1, 2, 3, 7		N/A		
	Config 4, 5, 6, 8		1		
$BW_{channel}$		MHz	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100		
PDSCH parameters: DL Reference Measurement Channel[Note2]			-		
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]	Config 1, 2, 3, 7		5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD		
	Config 4, 5, 6, 8		5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD		
OCNG Patterns[Note2]	Config 1, 2, 3, 7		5 MHz: OP.19 FDD 10 MHz: OP.6 FDD 20 MHz: OP.14 FDD		
	Config 4, 5, 6, 8		5 MHz: OP.10 TDD 10 MHz: OP.2 TDD 20 MHz: OP.8 TDD		
PBCH_RA		dB	0		
PBCH_RB					
PSS_RA					
SSS_RA					
PCFICH_RB					
PHICH_RA					
PHICH_RB					
PDCCH_RA					
PDCCH_RB					
PDSCH_RA					
PDSCH_RB					
OCNG_RA[Note3]					
OCNG_RB[Note3]					

N_{oc} Note4	Bands FDD_A Note 9, TDD_A	dBm/15kHz	-83	-104.70	-119.5
	Bands FDD_B1, FDD_B2 Note 10				-119
	Bands FDD_C, TDD_C				-118.5
	Bands FDD_D				-118
	Bands FDD_E, FDD_F Note 7, TDD_E				-117.5
	Bands FDD_G Note 8				-116.5
	Bands FDD_H				-116
$\hat{E}_s/N_{oc}$		dB	-1.75	-4.0	-4.0
$\hat{E}_s/I_{ot}$ Note5		dB	-1.75	-4.0	-4.0
RSRP Note5	Bands FDD_A Note 9, TDD_A	dBm/15kHz	-84.75	-108.70	-123.5
	Bands FDD_B1, FDD_B2 Note 10				-123
	Bands FDD_C, TDD_C				-122.5
	Bands FDD_D				-122
	Bands FDD_E, FDD_F Note 7, TDD_E				-121.5
	Bands FDD_G Note 8				-120.5
	Bands FDD_H				-120
RSRQ Note5	Bands FDD_A Note 9, TDD_A	dB	-14.76	-16.25	-16.25
	Bands FDD_B1, FDD_B2 Note 10				
	Bands FDD_C, TDD_C				
	Bands FDD_D				
	Bands FDD_E, FDD_F Note 7, TDD_E				
	Bands FDD_G Note 8				
	Bands FDD_H				
Io Note5	Bands FDD_A Note 9, TDD_A	dBm/Ch BW	-53 + 10log($N_{RB,c}$/50)	-75.46 + 10log($N_{RB,c}$/50)	-90.26 + 10log($N_{RB,c}$/50)
	Bands FDD_B1, FDD_B2 Note 10				-89.76 + 10log($N_{RB,c}$/50)
	Bands FDD_C, TDD_C				-89.26 + 10log($N_{RB,c}$/50)
	Bands FDD_D				-88.76 + 10log($N_{RB,c}$/50)
	Bands FDD_E, FDD_F Note 7, TDD_E				-88.26 + 10log($N_{RB,c}$/50)
	Bands FDD_G Note 8				-87.26 + 10log($N_{RB,c}$/50)
	Bands FDD_H				-86.76 + 10log($N_{RB,c}$/50)
Propagation Condition			AWGN		
Antenna Configuration and Correlation Matrix			1x2		

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 4:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5:	$\hat{E}_s/I_{ot}$, RSRP, RSRQ and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 6:	E-UTRA operating band groups are as defined in clause 3.5 of TS 36.133 [15].
Note 7:	For Band 26, the tests shall be performed with the carrier frequency of assigned E-UTRA channel bandwidth within 865-894 MHz.
Note 8:	Except Band 29.
Note 9:	Except Band 32, Band 75 and Band 76.
Note 10:	For Band 74, the tests shall be performed with the carrier frequency of the assigned E-UTRA channel bandwidth within 1475.9-1510.9 MHz.

A.16.7.6.2.3 Test Requirements

The SA inter-RAT E-UTRAN RSRQ measurement accuracy for cell 2 shall fulfil absolute requirement in clause 9.4A.2 and 9.4A.3.

A.16.7.7 E-UTRAN RS-SINR

A.16.7.7.1 SA: inter-RAT measurement accuracy with FR1 serving cell for 1 Rx UE

A.16.7.7.2 SA: inter-RAT measurement accuracy with FR1 serving cell for 2 Rx UE

A.17 NR standalone tests with one or more NR cells in FR2 for RedCap

A.17.1 SA: RRC_IDLE state mobility for RedCap

A.17.1.1 Cell re-selection to NR

A.17.1.1.1 Cell reselection to FR2 intra-frequency NR case for 2 Rx

A.17.1.1.1.1 Test Purpose and Environment

This test is to verify the requirement for the intra frequency NR cell reselection requirements specified in clause 4.2B.2.3.

A.17.1.1.1.2 Test Parameters

The test scenario comprises of 1 NR carrier and 2 cells as given in tables A.17.1.1.1.2-1, A.17.1.1.1.2-2 and A.17.1.1.1.2-3. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Only cell 1 is already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2.

Table A.17.1.1.1.2-1: Supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.17.1.1.1.2-2: General test parameters for RedCap UE intra frequency NR cell re-selection test case

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell1	
T2 end condition	Active cell		1, 2	Cell2	
	Neighbour cell		1, 2	Cell1	
Final condition	Active cell		1, 2	Cell1	
	Neighbour cell		1, 2	Cell2	
RF Channel Number			1, 2	1	
Time offset between cells			1, 2	3 µs	Synchronous cells
Access Barring Information		-	1, 2	Not Sent	No additional delays in random access procedure.
SMTC configuration			1, 2	SMTC.1	
DRX cycle length		s	1, 2	1.28	The value shall be used for all cells in the test.
PRACH configuration index			1, 2	190	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2	Not configured	

T1	s	1, 2	>7	During T1, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed, the intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T2
T2	s	1, 2	135	T2 needs to be defined so that cell re-selection reaction time is taken into account.
T3	s	1, 2	35	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.17.1.1.1.2-3: Cell specific test parameters for RedCap UE intra frequency NR cell re-selection test case in AWGN

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1, 2	TDDConf.3.1			TDDConf.3.1		
PDSCH RMC configuration		1	SR.3.1 TDD			SR.3.1 TDD		
		2	SR.3.1 TDD			SR.3.1 TDD		
RMSI CORESET RMC configuration		1	CR.3.1 TDD			CR.3.1 TDD		
		2	CR.3.1 TDD			CR.3.1 TDD		
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD			CCR.3.1 TDD		
		2	CCR.3.1 TDD			CCR.3.1 TDD		
SSB configuration		1	SSB.3 FR2			SSB.7 FR2		
		2	SSB.4 FR2			SSB.8 FR2		
OCNG Pattern		1, 2	OP.4			OP.4		
$BW_{channel}$	MHz	1, 2	100: $N_{RB,c}$ = 66			100: $N_{RB,c}$ = 66		
Data RBs allocated		1, 2	66			66		
Initial DL BWP configuration		1, 2	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2	SSB			SSB		
Qrxlevmin	dBm/SCS	1	-138			-138		
		2	-135			-135		
Pcompensation	dB	1, 2	0			0		
$Qhyst_s$	dB	1, 2	0			0		
$Qoffset_{s,n}$	dB	1, 2	0			0		
Cell_selection_and_reselection_quality_measurement		1, 2	SS-RSRP			SS-RSRP		
AoA setup		1, 2	Setup 1 defined in A.3.15.1			Setup 1 defined in A.3.15.1		
$\hat{E}_s/I_{ot}$	dB	1	8	-3	1.5	-infinity	1.5	-3
		2						
Beam assumption[Note 4]		1,2	Rough					
N_{oc} [Note2]	dBm/SCS	1	-93					
		2	-90					
N_{oc} [Note2]	dBm/15 kHz	1	-102					

		2						
$\hat{E}_s / N_{oc}$	dB	1	8	-3	1.5	-infinity	1.5	-3
		2						
SS-RSRP Note3	dBm/SCS	1	-85	-96	-91.5	-infinity	-91.5	-96
		2	-82	-93	-88.5	-infinity	-88.5	-93
Io on SSB symbols of each cell	dBm/95.04 MHz	1	-59.37	-63.40	-62.47	-64.01	-62.47	-63.40
		2	-57.18	-62.86	-61.67	-64.01	-61.67	-62.86
Treselection	s	1, 2	0	0	0	0	0	0
SintrasearchP	dB	1, 2	50			50		
Propagation Condition		1, 2	AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.17.1.1.1.3 Test Requirements

The cell reselection delay to a newly detectable cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2 and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a registration procedure for mobility and periodic registration updateon Cell 2.

The cell re-selection delay to a newly detectable cell shall be less than 130 s.

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on cell 1 and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a registration procedure for mobility and periodic registration updateon cell 1.

The cell re-selection delay to an already detected cell shall be less than 27 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a newly detectable cell can be expressed as: $T_{detect, NR_Intra} + T_{SI-NR}$, and to an already detected cell can be expressed as: $T_{evaluate, NR_intra} + T_{SI-NR}$,

Where:

T_{detect, NR_Intra} See Table 4.2B.2.3-1 in clause 4.2B.2.3

$T_{evaluate, NR_intra}$ See Table 4.2B.2.3-1 in clause 4.2B.2.3

T_{SI-NR} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 129.28 s, allow 130 s for the cell re-selection delay to a newly detectable cell and 26.88 s for the cell re-selection delay to an already detected cell in the test case, which we allow 27 s.

A.17.1.1.2 Cell reselection to FR2 inter-frequency NR case

A.17.1.1.2.1 Test Purpose and Environment

This test is to verify the requirement for the inter frequency NR cell reselection requirements specified in clause 4.2B.2.4.

A.17.1.1.2.2 Test Parameters

The test scenario comprises of 2 cells on 2 different NR carriers respectively as given in tables A.17.1.1.2.2-1, A.17.1.1.2.2-2 and A.17.1.1.2.2-3. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas and cell 2 is of higher priority than cell 1. Furthermore, UE has not registered with network for the tracking area containing cell 2.

Table A.17.1.1.2.2-1: Supported test configurations

Configuration	Description for serving cell	Description for target cell
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.17.1.1.2.2-2: General test parameters for RedCap UE FR2 inter frequency NR cell re-selection test case

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell2	The UE camps on cell 2 in the initial phase and during T1 period the UE reselects to cell 1
	Neighbour cell		1, 2	Cell1	
T1 end condition	Active cell		1, 2	Cell1	The UE shall perform reselection to cell 1 during T1
	Neighbour cells		1, 2	Cell2	
T3 end condition	Active cell		1, 2	Cell2	The UE shall perform reselection to cell 2 with higher priority during T3
	Neighbour cell		1, 2	Cell1	
RF Channel Number			1, 2	1, 2	
Time offset between cells			1, 2	3 μs	Synchronous cells
Access Barring Information		-	1, 2	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR2	
			2	SSB.2 FR2	
SMTC configuration			1, 2	SMTC.1	
DRX cycle length		s	1, 2	1.28	The value shall be used for all cells in the test.
PRACH configuration index			1, 2	190	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2	Not configured	
T1		s	1, 2	35	T1 needs to be defined so that cell re-selection reaction time is taken into account.

T2	s	1, 2	>7	During T2, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T3.
T3	s	1, 2	95	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.17.1.1.2.2-3: Cell specific test parameters for RedCap UE FR2 inter frequency NR cell re-selection test case in AWGN

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1, 2	TDDConf.3.1			TDDConf.3.1		
PDSCH RMC configuration		1, 2	SR.3.1 TDD			SR.3.1 TDD		
RMSI CORESET parameters		1, 2	CR.3.1 TDD			CR.3.1 TDD		
RMSI CORESET RMC configuration		1, 2	CCR.3.1 TDD			CCR.3.1 TDD		
OCNG Pattern		1, 2	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1, 2	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2	SSB			SSB		
Qrxlevmin	dBm/SCS	1	-140			-140		
		2	-137			-137		
Pcompensation	dB	1, 2	0			0		
$Qhyst_s$	dB	1, 2	0			0		
$Qoffset_{s,n}$	dB	1, 2	0			0		
Cell_selection_and_reselection_quality_measurement		1, 2	SS-RSRP			SS-RSRP		
AoA setup		1, 2	Setup 1 defined in A.3.15.1			Setup 1 defined in A.3.15.1		
Beam assumption[Note 4]		1,2	Rough			Rough		
$\hat{E}_s / I_{ot}$	dB	1	10.5	10.5	8	-10.5	-infinity	8.5
		2						
N_{oc} [Note2]	dBm/SCS	1	-93			-93		
		2	-90			-90		
N_{oc} [Note2]	dBm/15 kHz	1	-102			-102		
		2						
$\hat{E}_s / N_{oc}$	dB	1	10.5	10.5	8	-10.5	-infinity	8.5
		2						
SS-RSRP [Note3]	dBm/SCS	1	-83.5-	-83.5	-85	-103.5	-infinity	-84.5
		2	-80.5	-80.5	-82	-100.5	-infinity	-80.5
Io	dBm/95.04 MHz	1, 2	-54.05	-54.05	-55.37	-63.64	-54.01	-54.94
Treselection	s	1, 2	-54.05	-54.05	-55.37	-63.64	-54.01	-54.94
SnonintrasearchP	dB	1, 2	50			50		
$Thresh_{x, highP}$	dB	1, 2	48			48		
$Thresh_{serving, lowP}$	dB	1, 2	44			44		

$Thresh_{x, lowP}$	dB	1, 2	50	50
Propagation Condition		1, 2	AWGN	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.17.1.1.2.3 Test Requirements

The cell reselection delay to a higher priority cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on cell 2 and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a registration procedure for mobility and periodic registration updateon cell 2.

The cell re-selection delay to a higher priority cell shall be less than 87 s.

The cell reselection delay to a lower priority cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 1 and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a registration procedure for mobility and periodic registration updateon cell 1.

The cell re-selection delay to a lower priority cell shall be less than 27 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a higher priority cell can be expressed as: $T_{higher_priority_search} + T_{evaluate, NR_inter} + T_{SI-NR}$, and to a lower priority cell can be expressed as: $T_{evaluate, NR_inter} + T_{SI-NR}$,

Where:

$T_{higher_priority_search}$ See clause 4.2B.2.7

$T_{evaluate, NR_inter}$ See Table 4.2B.2.4-1 in clause 4.2B.2.4

T_{SI-NR} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 86.88 s, allow 87 s for the cell re-selection delay to a higher priority cell and 26.88 s for the cell re-selection delay to a lower priority cell in the test case, which we allow 27 s.

A.17.1.1.3 Cell reselection to FR2 intra-frequency NR case for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE

A.17.1.1.3.1 Test Purpose and Environment

This test is to verify the requirement for the intra frequency NR cell reselection requirements for UE configured with stationary relaxed measurement criterion specified in clause 4.2B.2.9.2.

A.17.1.1.3.2 Test Parameters

The test scenario comprises of 1 NR carrier and 2 cells as given in tables A.17.1.1.3.2-1, A.17.1.1.3.2-2 and A.17.1.1.3.2-3. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. During T1 and T2, only criteria *stationaryMobilityEvaluation* is configured and fulfilled. UE has not registered with network for the tracking area containing cell2.

Table A.17.1.1.3.2-1: Supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.17.1.1.3.2-2: General test parameters for FR2 intra-frequency NR cell re-selection test case for UE fulfilling stationary criterion for 2 Rx UE

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell1	The UE camps on cell 1 in the initial phase
	Neighbour cells		1, 2	Cell2	
T1 end condition	Active cell		1, 2	Cell2	The UE reselects to cell 2 during T1 period
	Neighbour cells		1, 2	Cell1	
Final condition	Active cell		1, 2	Cell1	The UE reselects to cell 1 during T2 period
	Neighbour cells		1,2	Cell2	
RF Channel Number			1, 2	1	
Time offset between cells			1, 2	3 μs	Synchronous cells
Access Barring Information		-	1, 2	Not Sent	No additional delays in random access procedure.
SMTC configuration			1, 2	TBD	
DRX cycle length		s	1, 2	0.64	The value shall be used for all cells in the test.
PRACH configuration index			1, 2	190	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2	Not configured	
T1		s	1, 2	100	
T2		s	1, 2	100	

Table A.17.1.1.3.2-3: Cell specific test parameters for FR2 intra-frequency NR cell re-selection test case in AWGN for UE fulfilling stationary mobility criterion for 2 Rx UE

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2	TDDConf.3.1		TDDConf.3.1	
PDSCH RMC configuration		1	SR.3.1 TDD		SR.3.1 TDD	
		2	SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET RMC configuration		1	CR.3.1 TDD		CR.3.1 TDD	
		2	CR.3.1 TDD		CR.3.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD		CCR.3.1 TDD	
		2	CCR.3.1 TDD		CCR.3.1 TDD	
SSB configuration		1	SSB.3 FR2		SSB.7 FR2	
		2	SSB.4 FR2		SSB.8 FR2	

OCNG Pattern		1, 2	OP.4		OP.4	
Initial DL BWP configuration		1, 2	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Initial UL BWP configuration		1, 2	66		66	
RLM-RS		1, 2	SSB		SSB	
Qrxlevmin	dBm/SCS	1	-140		-140	
		2	-137		-137	
$S_{SearchDeltaP-Stationary}$	dB	1, 2	6		6	
$T_{SearchDeltaP-Stationary}$	s	1,2	5		5	
Pcompensation	dB	1, 2	0		0	
$Qhyst_s$	dB	1, 2	0		0	
$Qoffset_{s, n}$	dB	1, 2	0		0	
Cell_selection_and_reselection_quality_measurement		1, 2	SS-RSRP		SS-RSRP	
AoA setup		1, 2	Setup 1 defined in A.3.15.1		Setup 1 defined in A.3.15.1	
Beam assumption[Note 4]		1,2	Rough		Rough	
$\hat{E}_s/I_{ot}$	dB	1	-3	1.5	1.5	-3
		2				
N_{oc} Note2	dBm/SCS	1	-93			
		2	-90			
N_{oc} Note2	dBm/15 kHz	1	-102			
		2				
$\hat{E}_s/N_{oc}$	dB	1	-3	1.5	1.5	-3
		2				
SS-RSRP Note3	dBm/SCS	1	96	91.5	91.5	96
		2	93	-88.5	88.5	93
Io on SSB symbols of each cell	dBm/95.04 MHz	1	63.40	62.47	-62. 47	63.40
		2	62.86	61.67	-61.67	62.86
Treselection	s	1, 2	0	0	0	0
SintrasearchP	dB	1, 2	50		50	
Propagation Condition		1, 2	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.17.1.1.3.3 Test Requirements

The cell reselection delay to an already detected cell for UE fulfilling stationary relaxed criterion is defined as the time from the beginning of time period T1, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 2.

The cell re-selection delay to an already detected cell shall be less than 155 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to an already detectable cell can be expressed as: $T_{evaluate,NR_Intra_RedCap_Relax}$ + T_{SI-NR},

Where:

$T_{evaluate,NR_Intra_RedCap_Relax}$ See Table 4.2B.2.9.2-2 in clause 4.2B.2.9.2,

T_{SI-NR} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 154.88 s, allow 155 s for the cell re-selection delay to an already detected cell for UE fulfilling stationary criterion in the test case.

A.17.1.1.4 Cell reselection to FR2 inter-frequency NR case for UE fulfilling stationary mobility relaxed measurement criterion for 2 Rx UE

A.17.1.1.4.1 Test Purpose and Environment

This test is to verify the requirement for the inter frequency NR cell reselection requirements for UE fulfilling stationary relaxed measurement criterion specified in clause 4.2B.2.10.2.

A.17.1.1.4.2 Test Parameters

The test scenario comprises of 2 cells (Cell 1 and Cell 2) on 2 different NR carriers respectively as given in tables A.17.1.1.4.2-1, A.17.1.1.4.2-2 and A.17.1.1.4.2-3. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and Cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing Cell 2. Cell 2 is of higher priority than Cell 1. The UE is configured with *stationaryMobilityEvaluation* criterion [2].

Table A.17.1.1.4.2-1: Supported test configurations

Configuration	Description for serving cell	Description for target cell
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.17.1.1.4.2-2: General test parameters for FR2 inter frequency NR cell re-selection test case for UE fulfilling stationary criterion for 2 Rx UE

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell2	The UE camps on cell2 and fulfils stationary (*stationaryMobilityEvaluation* [2]) criterion.
	Neighbour cell		1, 2	Cell1	
T1 final condition	Active cell		1, 2	Cell1	The UE reselects to low priority cell1 during T1
	Neighbour cell		1, 2	Cell2	
T2 final condition	Active cell		1, 2	Cell2	The UE reselects to high priority cell2 during T2
	Neighbour cell			Cell1	
RF Channel Number			1, 2	1, 2	
Time offset between cells			1, 2	3 µs	Synchronous cells
Access Barring Information		-	1, 2	Not Sent	No additional delays in random access procedure.

SSB configuration		1	TBD	
		2	TBD	
SMTC configuration		1, 2	TBD	
DRX cycle length	s	1, 2	0.64	The value shall be used for all cells in the test.
PRACH configuration index		1, 2	190	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell		1, 2	Not configured	
T1	s	1, 2	85	T1 needs to be long enough to allow cell re-selection to already known cell1
T2	s	1, 2	85	T2 needs to be long enough to allow cell re-selection to already known cell2

Table A.17.1.1.4.2-3: Cell specific test parameters for FR2 inter frequency NR cell re-selection test case in AWGN for UE fulfilling stationary criterion for 2 Rx UE

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2	TDDConf.3.1		TDDConf.3.1	
PDSCH RMC configuration		1, 2	SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET parameters		1, 2	CR.3.1 TDD		CR.3.1 TDD	
RMSI CORESET RMC configuration		1, 2	CCR.3.1 TDD		CCR.3.1 TDD	
OCNG Pattern		1, 2	OP.1 defined in A.3.2.1		OP.1 defined in A.3.2.1	
Initial DL BWP configuration		1, 2	DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		1, 2	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1, 2	SSB		SSB	
Qrxlevmin	dBm/SCS	1	-140		-140	
		2	-137		-137	
Pcompensation	dB	1, 2	0		0	
$Qhyst_s$	dB	1, 2	0		0	
$Qoffset_{s,n}$	dB	1, 2	0		0	
Cell_selection_and_reselection_quality_measurement		1, 2	SS-RSRP		SS-RSRP	
AoA setup		1, 2	Setup 1 defined in A.3.15.1		Setup 1 defined in A.3.15.1	
Beam assumption[Note 4]		1, 2	Rough		Rough	
$\hat{E}_s / I_{ot}$	dB	1, 2	10.5	8	-10.5	-8.5
N_{oc} [Note2]	dBm/SCS	1	-93		-93	
		2	-90		-90	
N_{oc} [Note2]	dBm/15 kHz	1, 2	-102		-102	
$\hat{E}_s / N_{oc}$	dB	1, 2	10.5	8	-10.5	8.5
SS-RSRP [Note3]	dBm/SCS	1	-82.5	-85	-103.5	-84.5
		2	-79.5	-82	-100.5	-81.5
Io	dBm/95.04 MHz	1	-53.14	-55.37	-63.64	-54.94
		2	-58.10	-60.189	-66.79	-59.79
TreselectionNR	s	1, 2	0		0	
SnonintrasearchP	dB	1, 2	50		Not sent	

$S_{SearchDeltaP-Stationary}$	dB	1, 2	6	6
$T_{SearchDeltaP-Stationary}$	s	1, 2	5	5
$Thresh_{x, highP}$	dB	1, 2	48	48
$Thresh_{serving, lowP}$	dB	1, 2	44	44
$Thresh_{x, lowP}$	dB	1, 2	50	50
Propagation Condition		1, 2	AWGN	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.17.1.1.4.3 Test Requirements

The cell reselection delay to an already detected low priority cell (Cell 1) for UE fulfilling stationary criterion is defined as the time from the beginning of time period T1, to the moment when the UE camps on Cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 1.

The cell re-selection delay to an already detected low priority cell, Cell 1, shall be less than 155 s.

The cell reselection delay to an already detected high priority cell (Cell 2) for UE fulfilling stationary criterion is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 2.

The cell re-selection delay to an already detected high priority cell, Cell 2, shall be less than 155 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE 1: The cell re-selection delay to an already detected low priority cell can be expressed as: $T_{evaluate,NR_Inter_RedCap_Relax} + T_{SI-NR}$

NOTE 2: The cell re-selection delay to an already detected higher priority cell can be expressed as: $T_{evaluate,NR_Inter_RedCap_Relax} + T_{SI-NR}$

Where:

$T_{evaluate,NR_Inter_RedCap_Relax}$ See Table 4.2B.2.10.2-2 in clause 4.2B.2.10.2

T_{SI-NR} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 154.88 s, allow 155 s for the cell re-selection delay to an already detected low priority cell for UE fulfilling stationary criterion in the test case.

This gives a total of 154.88 s, allow 155 s for the cell re-selection delay to an already detected high priority cell for UE fulfilling stationary criterion in the test case.

A.17.2 SA: RRC_INACTIVE state mobility for RedCap

A.17.2.1 Configured Grant based Small Data Transmissions (CG-SDT) for RedCap

Editor's Note: the contents in the clause will be updated based on further agreement on the RedCap specific test configurations and the updates from latest FR2 SDT CR in R4-2220345.

A.17.2.1.1 TA validation for CG-SDT in FR2 for RedCap

A.17.2.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE correctly performs TA validation for CG-SDT. This test will partly verify the TA validation requirements in clause 5.2B.2.1.

Supported test configurations are shown in Table A.17.2.1.1.1-1. The test parameters are given in Table A.17.2.1.1.1-2 and Table A.17.2.1.1.1-3.

There is one cell (Cell 1), which is the active NR cell, in the test. The test consists of 5 successive time periods, with time duration of T1 to T5 respectively. Figure A.17.2.1.1.1-1 shows the variation of the RSRP level in the active cell during the test.

Time duration T1 starts at time point TA and ends at time point TB. During T1 test equipment sets the transmit power to P_0.

Time duration T2 starts at time point TB and ends at time point TD. At time point TC, which is W1 after time point TB, test equipment sends RRCRelease message with CG-SDT configuration to UE and UE enters RRC_INACTIVE. During T2 test equipment sets the transmit power to P_1.

Time duration T3 starts at time point TD and ends at time point TE. During T3 test equipment sets the transmit power to P_0.

Time duration T4 starts at time point TE and ends at time point TI. Test equipment makes UL data arrival at UE lower layer at time point TF which is W2 after time point TE, and the details to configure UL data arrival is left to RAN5. After time point TF, test equipment observes whether UE transmits with CG-SDT within 640ms + Z after TF. The time point when UE transmits with CG-SDT is denoted as TG. At time point TH (FFS how TH is determined), the second RRCRelease is sent to UE. During T4 test equipment sets the transmit power to P_2.

Time duration T5 starts at time point TJ and ends at time point FFS. During T5 test equipment sets the transmit power to P_3. Test equipment triggers UL data arrival at UE lower layer at time point TJ, and the details to configure UL data arrival is left to RAN5.

Table A.17.2.1.1.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	NR TDD, SSB SCS 120 kHz, data SCS 120KHz, BW 100 MHz

Table A.17.2.1.1.1-2: General test parameters for TA validation for CG-SDT in FR2

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		TDD
$BW_{channel}$	Config 1	MHz	100: $N_{RB,c}$ = 66

DL initial BWP configuration	Config 1		DLBWP.0.1
UL initial BWP configuration	Config 1		ULBWP.0.1
TDD Configuration	Config 1		TDDConf.3.1
RMSI CORESET Reference Channel	Config 1		CR.3.1 DD
SSB Configuration	Config 1		SSB.1 FR2
SMTC Configuration	Config 1		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1		120 kHz
PRACH Configuration	Config 1		Table A.3.8.3.4
OCNG parameters			OP.5
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
DRX		s	1.28
cg-SDT-RSRP-ChangeThreshold		dB	[8]
cg-SDT-TimeAlignmentTime			infinity
CG-SDT resource period		ms	[40]
T1		s	[TBD]
T2		s	[TBD]
T3		s	[TBD]
T4		s	[TBD]
T5		s	[TBD]

Table A.17.2.1.1.1-3: Cell specific test parameters TA validation for CG-SDT in FR2

Parameter		Unit		Test 1			
			T1	T2	T3	T4	T5
AoA setup			Setup 1 defined in A.3.15				
Assumption for UE beams Note 4			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	4				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0				
EPRE ratio of PBCH DMRS to SSS		dB	0				
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
N_{oc}	Config 1	dBm/15kHz	[-98]				
N_{oc}	Config 1	dBm/SCS	[-89]				
$\hat{E}_s / I_{ot}$	Config 1	dB	[0]	[10.35]	[0]	[15.25]	[6]
$\hat{E}_s / N_{oc}$	Config 1	dB	[0]	[10.35]	[0]	[15.25]	[6]
SS-RSRP	Config 1	dBm/SCS	[-89]	[-78.65]	[-89]	[-73.75]	[-83]
Io	Config 1	dBm/95.04 MHz	[-57]	[-49.27]	[-57]	[-44.63]	[-53.04]
Propagation condition				AWGN			

		Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG. Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.

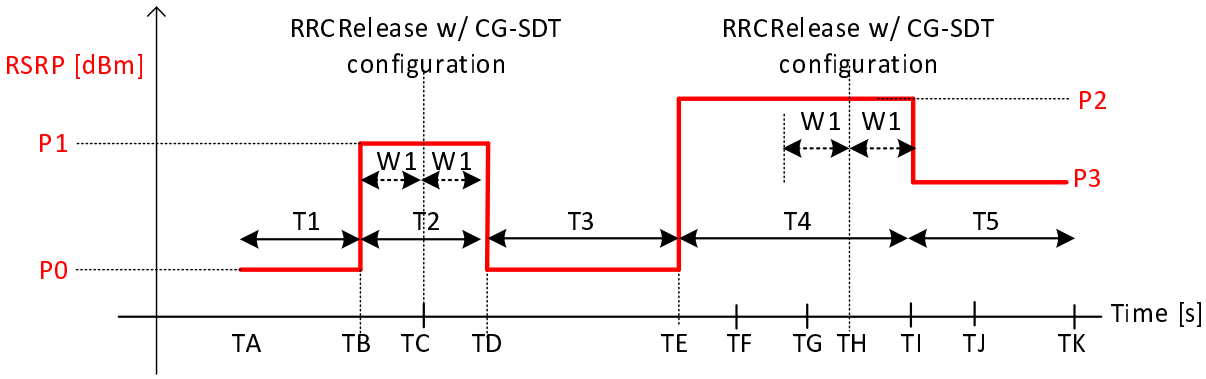

Figure A.17.2.1.1.1-1: RSRP variation for TA validation for CG-SDT

A.17.2.1.1.2 Test Requirements

The UE behaviour in each test during time durations shall be as follows:

During T4, UE shall transmit UL data with CG-SDT within 640ms + Z after time point TF.

During T5, UE shall not transmit UL data with CG-SDT.

The rate of correct events observed during repeated tests shall be at least 90%.

A.17.3 RRC_CONNECTED state mobility for RedCap

A.17.3.1 Handover for RedCap

A.17.3.1.1 Intra-frequency handover from FR2 to FR2; unknown target cell for 2 Rx

A.17.3.1.1.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR2-NR FR2 intra frequency handover requirements specified in clause 6.1D.1.3.

A.17.3.1.1.2 Test Parameters

Supported test configurations are shown in table A.17.3.1.1.2-1. Both handover delay and interruption length are tested by using the parameters in table A.17.3.1.1.2-2, and A.17.3.1.1.2-3.

NR shall send a RRC message implying handover to cell 2, then UE handover to cell 2's intial BWP associated with CD-SSB.The test scenario comprises of carriers and one cell on each carrier. No gap patterns are configured in the

test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE receives a RRC handover command from the network. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

Table A.17.3.1.1.2-1: Intra-frequency handover from FR2 to FR2 test configurations

Config	Description
1	Source cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.17.3.1.1.2-2: General test parameters Intra-frequency handover from FR2 to FR2

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
A4-Offset		dBm	-120	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	≤10	

Table A.17.3.1.1.2-3: Cell specific test parameters for NR FR2-FR2 Intra frequency handover test case

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
Assumption for UE beams[Note 6]			Rough		Rough	
AoA setup			Setup 1 as defined in A.3.15			
NR RF Channel Number			**1**		**1**	
Duplex mode			TDD			
TDD configuration			TDDConf.3.1			
$BW_{channel}$		MHz	100: $N_{RB,c}$ = 66			
BWP BW		MHz	100: $N_{RB,c}$ = 66			
Data RBs allocated			66			
DRx Cycle		ms	Not Applicable			
PDSCH Reference measurement channel			SR3.1 TDD			
RMSI CORESET Reference Channel			CR3.1 TDD			
Control Channel RMC			CCR.3.1 TDD			
OCNG Patterns			OP. 1			
SMTC Configuration			SMTC pattern 1			
SSB Configuration			SSB.3 FR2		SSB. 3 FR2	
PDSCH/PDCCH subcarrier spacing		kHz	120 kHz			
PUCCH/PUSCH subcarrier spacing		kHz	120 kHz			
PRACH configuration			FR2 PRACH configuration 1			
TRS configuration			TRS.2.1 TDD			
PDSCH/PDCCH TCI state			TCI.State.2			
BWP configuraiton	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0		0	
EPRE ratio of PBCH DMRS to SSS						

EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-104.7			
N_{oc} Note2		dBm/SCS	-95.7			
$\hat{E}_s/I_{ot}$		dB	6	-1.8	-Infinity	0
$\hat{E}_s/N_{oc}$		dB	6	6	-Infinity	7
Io Note3		dBm/BW	-59.7	-56.7	-59.7	-56.7
Propagation condition		-	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone

Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone

Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.17.3.1.1.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 232 ms from the beginning of time period T2.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2].

$T_{interrupt}$ = 222 ms in the test. $T_{interrupt}$ is defined in clause 6.1D.1.3.

This gives a total of 232 ms.

A.17.3.1.2 Inter-frequency handover from FR2 to FR2; unknown target cell for 2 Rx

A.17.3.1.2.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR2 NCD-SSB to NR FR2 NCD-SSB inter frequency handover requirements specified in clause 6.1D.1.3.

A.17.3.1.2.2 Test Parameters

Supported test configurations are shown in table A.17.3.1.2.2-1. Both handover delay and interruption length are tested by using the parameters in table A.17.3.1.2.2-2, and A.17.3.1.2.2-3.

NR shall send a RRC message implying handover to cell 2, then UE handover from Cell 1's NCD-SSB to cell 2's specific RedCap BWP associated with NCD-SSB.The test scenario comprises of carriers and one cell on each

carrier. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE receives a RRC handover command from the network. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

Table A.17.3.1.2.2-1: Inter-frequency handover from FR2 to FR2 test configurations

Config	Description
1	Source cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.17.3.1.2.2-2: General test parameters Inter-frequency handover from FR2 to FR2

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
A4-Offset		dB	-120	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	≤10	

Table A.17.3.1.2.2-3: Cell specific test parameters for NR FR2-FR2 Inter frequency handover test case

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
Assumption for UE beams[Note 6]			Rough		Rough	
AoA setup			Setup 1as defined in A.3.15			
NR RF Channel Number			**1**		**2**	
Duplex mode			TDD			
TDD configuration			TDDConf.3.1			
$BW_{channel}$		MHz	100: $N_{RB,c}$ = 66			
BWP BW		MHz	100: $N_{RB,c}$ = 66			
Data RBs allocated			66			
DRx Cycle		ms	Not Applicable			
PDSCH Reference measurement channel			SR3.1 TDD			
RMSI CORESET Reference Channel			CR3.1 TDD			
Control Channel RMC			CCR.3.1 TDD			
OCNG Patterns			O P. 1			
SMTC Configuration			SMTC.2 RedCap			
SSB Configuration			SSB.3 RedCap FR2		SSB.3 RedCap FR2	
PDSCH/PDCCH subcarrier spacing		kHz	120 kHz			
PUCCH/PUSCH subcarrier spacing		kHz	120 kHz			
PRACH configuration			FR2 PRACH configuration 1			
TRS configuration			TRS.2.1 TDD			
PDSCH/PDCCH TCI state			TCI.State.2			
BWP configuraiton	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.3 RedCap			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.3 RedCap			
EPRE ratio of PSS to SSS		dB	0		0	
EPRE ratio of PBCH DMRS to SSS						

EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-104.7		-104.7	
N_{oc} Note2		dBm/SCS	-95.7		-95.7	
$\hat{E}_s / I_{ot}$		dB	5	5	-Infinity	5
$\hat{E}_s / N_{oc}$		dB	5	5	-Infinity	5
Io Note3	Config 1,2	dBm/ BW	-60.5	-60.5	-66.7	-60.5
Propagation condition		-	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone

Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone

Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.17.3.1.2.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 2052 ms from the beginning of time period T2.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2].

$T_{interrupt}$ = 2042 ms in the test. $T_{interrupt}$ is defined in clause 6.1D.1.3.

This gives a total of 2052 ms.

A.17.3.2 RRC Connection Mobility Control for RedCap

A.17.3.2.1 SA: RRC Re-establishment

A.17.3.2.1.1 Intra-frequency RRC Re-establishment in FR2

A.17.3.2.1.1.1 Test Purpose and Environment

The purpose is to verify that the NR intra-frequency RRC re-establishment delay in FR2 without known target cell is within the specified limits. These tests will verify the requirements in clause 6.2.1B.

The test parameters are given in table A.17.3.2.1.1.1-1, table A.17.3.2.1.1.1-2 and table A.17.3.2.1.1.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time

period T2, cell 1, which is the active cell, becomes inactive. The time period T3 starts after the occurrence of the radio link failure.

Table A.17.3.2.1.1.1-1: Supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.17.3.2.1.1.1-2: General test parameters for NR intra-frequency RRC Re-establishment test case in FR2

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1	Cell1	
	Neighbour cells		1	Cell2	
Final condition	Active cell		1	Cell2	
RF Channel Number			1	1	
Time offset between cells			1	3 µs	Synchronous cells
N310		-	1	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1	1	Minimum consecutive in-sync indications from lower layers
T310		ms	1	0	Radio link failure timer; T310 is disabled
T311		ms	1	5000	RRC re-establishment timer
Access Barring Information		-	1	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.3 FR2	
SMTC configuration			1	SMTC pattern 1	
DRX cycle length		s	1	OFF	
PRACH configuration			1	FR2 PRACH configuration 1	Table A.3.8.3.1-1
T1		s	1	5	
T2		s	1	4.84	Time for the UE to detect RLF (Summation of $T_{Evaluate_out_SSB}$ defined in clause 8.1 in TS 38.133, T310 and the period for UE turns off transmitter defined in clause 8.1.5 in TS 38.133)
T3		s	1	5	

Table A.17.3.2.1.1.1-3: Cell specific test parameters for NR intra-frequency RRC Re-establishment test case in FR2

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Assumption for UE beams[Note 4]			Rough			Rough		
TDD configuration		1	TDDConf.3.1			TDDConf.3.1		
$BW_{channel}$	MHz	1	100: $N_{RB,c}$ = 66			100: $N_{RB,c}$ = 66		
Data RBs allocated		1	24			24		
PDSCH RMC configuration		1	SR.3.1 TDD			N/A		

RMSI CORESET RMC configuration		1	CR.3.1 TDD			CR.3.1 TDD		
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD			CCR.3.1 TDD		
TRS configuration		1	TRS.2.1 TDD			N/A		
PDSCH/PDCCH TCI state		1	TCI.State.2			N/A		
OCNG Pattern		1	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1	SSB			SSB		
AoA setup		1	Setup 1 defined in A.3.15.1			Setup 1 defined in A.3.15.1		
$\hat{E}_s/I_{ot}$	dB	1	-0.12	-infinity	-infinity	-3.46	2	2
N_{oc} Note2	dBm/15 kHz	1	-104.7					
N_{oc} Note2	dBm/SCS	1	-95.7					
$\hat{E}_s/N_{oc}$	dB	1	4	-infinity	-infinity	2	2	2
SS-RSRP Note3	dBm/SCS	1	-91.7	-infinity	-infinity	-93.7	-93.7	-93.7
Io	dBm/95.04 MHz	1	-64.00	-66.95	-66.95	-64.00	-66.95	-66.95
Propagation Condition		1	AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.17.3.2.1.1.2 Test Requirements

he RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to an unknown NR intra frequency cell shall be less than 5 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{re\text{-}establish_delay} = T_{UL_grant} + T_{UE_re\text{-}establish_delay}.$$

Where:

T_{UL_grant} = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence T_{UL_grant} is not used.

$$T_{UE_re-establish_delay} = 50 \text{ ms} + T_{identify_intra_NR} + \sum_{i=1}^{Nfreq-1} T_{identify_inter_NR,i} + T_{SI-NR} + T_{PRACH}$$

$N_{freq} = 1$

$T_{identify_intra_NR} = 3520$ ms

T_{SI} = 1280 ms; it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target intra-frequency NR cell.

T_{PRACH} = 15 ms; it is the additional delay caused by the random access procedure.

This gives a total of 4865 ms, allow 5 s in the test case.

A.17.3.2.1.2 Inter-frequency RRC Re-establishment in FR2

A.17.3.2.1.2.1 Test Purpose and Environment

The purpose is to verify that the NR inter-frequency RRC re-establishment delay in FR2 without known target cell is within the specified limits. These tests will verify the requirements in clause 6.2.1B.

The test parameters are given in table A.17.3.2.1.2.1-1, table A.17.3.2.1.2.1-2 and table A.17.3.2.1.2.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, becomes inactive. The time period T3 starts after the occurrence of the radio link failure. During T1, the UE shall be configured with the carrier frequency of cell 2 (with RF Channel Number #2) to ensure that the UE has the context of the carrier frequency of cell 2 by the end of T1.

Table A.17.3.2.1.2.1-1: Supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.17.3.2.1.2.1-2: General test parameters for NR inter-frequency RRC Re-establishment test case in FR2

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1	Cell1	
	Neighbour cells		1	Cell2	
Final condition	Active cell		1	Cell2	
RF Channel Number			1	1, 2	
Time offset between cells			1	3 µs	Synchronous cells
N310		-	1	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1	1	Minimum consecutive in-sync indications from lower layers
T310		ms	1	0	Radio link failure timer; T310 is disabled
T311		ms	1	5000	RRC re-establishment timer
Access Barring Information		-	1	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.3 FR2	
SMTC configuration			1	SMTC pattern 1	
DRX cycle length		s	1	OFF	
PRACH configuration			1	FR2 PRACH configuration 1	Table A.3.8.3.1-1
T1		s	1	5	

T2	s	1	4.84	Time for the UE to detect RLF (Summation of $T_{Evaluate_out_SSB}$ defined in clause 8.1 in TS 38.133, T310 and the period for UE turns off transmitter defined in clause 8.1.5 in TS 38.133)
T3	s	1	6	

Table A.17.3.2.1.2.1-3: Cell specific test parameters for NR inter-frequency RRC Re-establishment test case in FR2

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Assumption for UE beams Note 4			Rough			Rough		
AoA setup		1	Setup 3 as specified in clause A.3.15					
			AoA1			AoA2		
TDD configuration		1	TDDConf.3.1			TDDConf.3.1		
$BW_{channel}$	MHz	1	100: $N_{RB,c}$ = 66			100: $N_{RB,c}$ = 66		
Data RBs allocated		1	24			24		
PDSCH RMC configuration		1	SR.3.1 TDD			N/A		
RMSI CORESET RMC configuration		1	CR.3.1 TDD			CR.3.1 TDD		
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD			CCR.3.1 TDD		
TRS configuration		1	TRS.2.1 TDD			N/A		
PDSCH/PDCCH TCI state		1	TCI.State.2			N/A		
OCNG Pattern		1	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1	SSB			SSB		
N_{oc} Note2	dBm/15 kHz	1	-92.1			-92.1		
N_{oc} Note2	dBm/SCS	1	-83.1			-83.1		
$\hat{E}_s / N_{oc}$	dB	1	0	-infinity	-infinity	-infinity	-infinity	0
$\hat{E}_s / I_{ot\ BB}$ Note 5	dB	1	-1.01	-infinity	-infinity	-infinity	-infinity	-1.01
SSB_RP Note3	dBm/SCS	1	-83.1	-infinity	-infinity	-infinity	-infinity	-83.1
Io	dBm/95.04 MHz	1	-55.46	-58.51	-58.51	-58.51	-58.51	-55.46
Propagation Condition		1	AWGN			AWGN		

Note 1: OCNG shall be used such that a constant total transmitted power is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 5: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.

A.17.3.2.1.2.2 Test Requirements

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to an unknown NR inter frequency cell shall be less than 6 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{re\text{-}establish_delay} = T_{UL_grant} + T_{UE_re\text{-}establish_delay}.$$

Where:

T_{UL_grant} = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence T_{UL_grant} is not used.

$$T_{UE_re-establish_delay} = 50 \text{ ms} + T_{identify_intra_NR} + \sum_{i=1}^{Nfreq-1} T_{identify_inter_NR,i} + T_{SI-NR} + T_{PRACH}$$

$N_{freq} = 2$

$T_{identify_intra_NR} = 1600$ ms

$T_{identify_inter_NR} = 2080$ ms

$T_{SI} = 1280$ ms; it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target inter-frequency NR cell.

$T_{PRACH} = 15$ ms; it is the additional delay caused by the random access procedure.

This gives a total of 5025 ms, allow 6 s in the test case.

A.17.3.2.1.3 Intra-frequency RRC Re-establishment in FR2 without serving cell timing

A.17.3.2.1.3.1 Test Purpose and Environment

The purpose is to verify that the NR intra-frequency RRC re-establishment delay in FR2 without serving cell timing is within the specified limits. These tests will verify the requirements in clause 6.2.1B.

The test parameters are given in table A.17.3.2.1.3.1-1, table A.17.3.2.1.3.1-2 and table A.17.3.2.1.3.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, is deactivated. The time period T3 starts after the occurrence of the radio link failure.

Table A.17.3.2.1.3.1-1: Supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.17.3.2.1.3.1-2: General test parameters for NR intra-frequency RRC Re-establishment test case in FR2

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1	Cell1	

	Neighbour cells		1	Cell2	
Final condition	Active cell		1	Cell2	
RF Channel Number			1	1	
Time offset between cells			1	3 μs	Synchronous cells
N310		-	1	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1	1	Minimum consecutive in-sync indications from lower layers
T310		ms	1	6000	Radio link failure timer configured by *RLF-TimersAndConstants*
T311		ms	1	5000	RRC re-establishment timer
Access Barring Information		-	1	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.3 FR2	
SMTC configuration			1	SMTC pattern 1	
DRX cycle length		s	1	OFF	
PRACH configuration			1	FR2 PRACH configuration 1	Table A.3.8.3.1-1
T1		s	1	5	
T2		s	1	10.84	Time for the UE to detect RLF (Summation of $T_{Evaluate_out_SSB}$ defined in clause 8.1B in TS 38.133, T310 and the period for UE turns off transmitter defined in clause 8.1B.5 in TS 38.133)
T3		s	1	5	

Table A.17.3.2.1.3.1-3: Cell specific test parameters for NR intra-frequency RRC Re-establishment test case in FR2

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Assumption for UE beams Note 4			Rough			Rough		
TDD configuration		1	TDDConf.3.1			TDDConf.3.1		
PDSCH RMC configuration		1	SR.3.1 TDD			N/A		
RMSI CORESET RMC configuration		1	CR.3.1 FDD			CR.3.1 FDD		
Dedicated CORESET RMC configuration		1	CCR.3.1 FDD			CCR.3.1 FDD		
TRS configuration		1	TRS.2.1 TDD			N/A		
PDSCH/PDCCH TCI state		1	TCI.State.2			N/A		
OCNG Pattern		1	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1	SSB			SSB		
AoA setup		1	Setup 1 defined in A.3.15.1			Setup 1 defined in A.3.15.1		
$\hat{E}_s / I_{ot}$	dB	1	5	-infinity	-infinity	-infinity	-infinity	5
N_{oc} Note2	dBm/15 kHz	1	-104.7					

N_{oc} Note2	dBm/SCS	1	-95.7					
$\hat{E}_s / N_{oc}$	dB	1	5	-infinity	-infinity	-infinity	-infinity	5
SS-RSRP Note3	dBm/SCS	1	-90.7	-infinity	-infinity	-infinity	-infinity	-90.7
Io	dBm/95.04 MHz	1	-60.52	-66.71	-60.52	-60.52	-66.71	-60.52
Propagation Condition		1	AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.17.3.2.1.3.2 Test Requirements

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to an unknown NR intra frequency cell without serving cell timing shall be less than 5 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{re\text{-}establish_delay} = T_{UL_grant} + T_{UE_re\text{-}establish_delay}.$$

Where:

T_{UL_grant} = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence T_{UL_grant} is not used.

$$T_{UE_re-establish_delay} = 50 \text{ ms} + T_{identify_intra_NR} + \sum_{i=1}^{Nfreq-1} T_{identify_inter_NR,i} + T_{SI-NR} + T_{PRACH}$$

$N_{freq} = 1$

$T_{identify_intra_NR} = 3520$ ms

$T_{SI} = 1280$ ms; it is the time required for receiving all the relevant system information as defined in TS 38.331 [2] for the target intra-frequency NR cell.

$T_{PRACH} = 15$ ms; it is the additional delay caused by the random access procedure.

This gives a total of 4865 ms, allow 5 s in the test case.

A.17.3.2.2 Random Access

A.17.3.2.2.1 4-step RA type contention based random access test in FR2 for NR Standalone

A.17.3.2.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in Clause 6.2.2B.2 and Clause 7.1A.2 in an AWGN model.

For this test one cell is used, with the configuration of Cell 1 configured as PCell in FR2. Supported test parameters are shown in Table A.17.3.2.2.1.1-1. UE capable of SA with PCell in FR2 needs to be tested by using the parameters in Table A.17.3.2.2.1.1-2 and Table A.17.3.2.2.1.1-3.

Table A.17.3.2.2.1.1-1: Supported test configurations for contention based random access test in FR2 for NR Standalone

Config	Description
1	NR PSCell 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.17.3.2.2.1.1-2: General test parameters for contention based random access test in FR2 for NR Standalone

Parameter		Unit	Test-1	Comments
SSB Configuration	Config 1		SSB.1 FR2	As defined in A.3.10
CSI-RS for tracking	Config 1		TRS.2.1 TDD	
Duplex Mode for Cell 1	Config 1		TDD	
TDD Configuration	Config 1		TDDConf.3.1	As defined in A.3.1.4
$BW_{channel}$	Config 1	MHz	100: $N_{RB,c}$ = 66	
Data RBs allocated	Config 1		24	
OCNG Pattern Note 1			OCNG pattern 1	As defined in A.3.2.1.
PDSCH Reference Channel Note 2	Config 1		SR.3.1 TDD	As defined in A.3.1.1.
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD	As defined in A.3.1.2
NR RF Channel Number			1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH_DMRS to SSS		dB		
EPRE ratio of PBCH to PBCH_DMRS		dB		
EPRE ratio of PDCCH_DMRS to SSS		dB		
EPRE ratio of PDCCH to PDCCH_DMRS		dB		
EPRE ratio of PDSCH_DMRS to SSS		dB		
EPRE ratio of PDSCH to PDSCH_DMRS		dB		
ss-PBCH-BlockPower		dBm/ SCS	+20 +Δ_{UL}	As defined in TS 38.331 [2]. Δ_{UL} is derived from the uplink calibration process Note 3
Configured UE transmitted power ($P_{CMAX,\ f,c}$)		dBm	maximum value configurable for certain power class	As defined in clause 6.2.4 in TS 38.101-2 [19]
PRACH Configuration			FR2 PRACH configuration 1	As defined in A.3.8B.3, with exceptions as defined below
rsrp-ThresholdSSB		dBm	RSRP_69 +Δ_{DL}	RSRP_69 corresponds to -88dBm. Δ_{DL} is derived from the downlink calibration process Note 4

preambleReceivedTargetPower	dBm	-100	As defined in TS 38.331 [2]

Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.
Note 2: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.
Note 3: The Δ_{UL} value is calculated as -ROUND(P_{PRACH0} -1), where P_{PRACH0} is the measured first PRACH power with -80.6dBm/SCS applied, *preambleReceivedTargetPower* = -100dBm and *ss-PBCH-BlockPower* = 20dBm. These values are used during the uplink calibration process carried out before the test case is run, with the UE configured to send PRACH.
Note 4: The Δ_{DL} value is calculated as ($RSRP_{REP}$ – RSRP_76), where $RSRP_{REP}$ is the SS-RSRP Reported value in Table 10.1.6.1-1 with -80.6dBm/SCS applied. These values are used during the downlink calibration process carried out before the test case is run, with the UE configured to report SS-RSRP. For a Reported value RSRP_x, x is treated as a positive integer value.

Table A.17.3.2.2.1.1-3: OTA-related test parameters for contention based random access test in FR2 for NR Standalone

Parameter		Unit	Test-1	Comments
AoA setup			Setup 1	As defined in A.3.15.1
Assumption for UE beams[Note 3]			Rough	
SSB with index 0	Es [Note1]	dBm/SCS	-80.6	Power of SSB with index 0 is set to be above configured *rsrp-ThresholdSSB*
	SSB_RP	dBm/SCS	-80.6	
	Es/Iot_{BB}	dB	21.09	
	Io	dBm/95.04 MHz	-56.01	Io in symbols containing SSB index 0
SSB with index 1	Es [Note1]	dBm/SCS	-95.0	Power of SSB with index 1 is set to be below configured *rsrp-ThresholdSSB*
	SSB_RP	dBm/SCS	-95.0	
	Es/Iot_{BB}	dB	6.69	
	Io	dBm/95.04 MHz	-70.41	Io in symbols containing SSB index 1
Propagation Condition		-	AWGN	

Note 1: No articial noise is applied in this test.
Note 2: Void.
Note 3: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.17.3.2.2.1.2 Test Requirements

Contention based random access is triggered by *not* explicitly assigning a random access preamble via dedicated signalling in the downlink.

A.17.3.2.2.1.2.1 Random Access Preamble Transmission

To test the UE behavior specified in Clause 6.2.2.2.1.1 the System Simulator shall receive the Random Access Preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SS-RSRP above the configured *rsrp-ThresholdSSB*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.17.3.2.2.1.2.2 Random Access Response Reception

To test the UE behavior specified in Clause 6.2.2.2.1.2 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 3 preambles have been received by the System Simulator. In response to the first 2 preambles, the System Simulator shall transmit a Random Access Response *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for Random Access Response(s) and shall transmit the msg3 if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.17.3.2.2.1.2.3 No Random Access Response Reception

To test the UE behavior specified in clause 6.2.2.2.1.3 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 3 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 2 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.17.3.2.2.1.2.4 Receiving an UL grant for msg3 retransmission

To test the UE behavior specified in clause 6.2.2.2.1.4 the System Simulator shall provide an UL grant for msg3 retransmission following a successful Random Access Response.

The UE shall re-transmit the msg3 upon the reception of an UL grant for msg3 retransmission.

A.17.3.2.2.1.2.5 Reception of an Incorrect Message over Temporary C-RNTI

To test the UE behavior specified in Clause 6.2.2.2.1.5 the System Simulator shall send a message addressed to the temporary C-RNTI with a UE Contention Resolution Identity included in the MAC control element *not* matching the CCCH SDU transmitted in msg3 uplink message.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires unless the received message includes a UE Contention Resolution Identity MAC control element and the UE Contention

Resolution Identity included in the MAC control element matches the CCCH SDU transmitted in the uplink message.

A.17.3.2.2.1.2.6 Reception of a Correct Message over Temporary C-RNTI

To test the UE behavior specified in Clause 6.2.2.2.1.5 the System Simulator shall send a message addressed to the temporary C-RNTI with a UE Contention Resolution Identity included in the MAC control element matching the CCCH SDU transmitted in the msg3 uplink message.

The UE shall send ACK if the Contention Resolution is successful.

A.17.3.2.2.1.2.7 Contention Resolution Timer expiry

To test the UE behavior specified in Clause 6.2.2.2.1.6 the System Simulator shall *not* send a response to a msg3.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if the Contention Resolution Timer expires.

A.17.3.2.2.2 4-step RA type non-contention based random access test in FR2 for NR Standalone

A.17.3.2.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in Clause 6.2.2.2 and Clause 7.1.2 in an AWGN model.

For this test one cell is used, with the configuration of Cell 1 configured as PCell in FR2. Supported test parameters are shown in Table A.17.3.2.2.2.1-1. UE capable of SA with PCell or SCell in FR2 needs to be tested by using the parameters in Table A.17.3.2.2.2.1-2 and Table A.17.3.2.2.2.1-3 for SSB-based non-contention based random access test (Test 1) and CSI-RS-based non-contention based random access test (Test 2). Test 2 is only applicable to UE which supports csi-RSRP-AndRSRQ-MeasWithSSB or csi-RSRP-AndRSRQ-MeasWithoutSSB.

Table A.17.3.2.2.2.1-1: Supported test configurations for non-contention based random access test in FR2 for NR Standalone

Config	Description
1	NR PSCell 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.17.3.2.2.2.1-2: General test parameters for non-contention based random access test in FR2 for NR Standalone

Parameter		Unit	Test-1	Test-2	Comments
SSB Configuration	Config 1		SSB.1 FR2	SSB.1 FR2	As defined in A.3.10B
CSI-RS for tracking	Config 1		TRS.2.1 TDD	TRS.2.1 TDD	
CSI-RS Configuration	Config 1		N/A	CSI-RS.3.1 TDD	As defined in A.3.1B.4
Duplex Mode for Cell 2	Config 1		TDD	TDD	
TDD Configuration	Config 1		TDDConf.3.1	TDDConf.3.1	
$BW_{channel}$	Config 1	MHz	100: $N_{RB,c}$ = 66	100: $N_{RB,c}$ = 66	
Data RBs allocated	Config 1		24	24	
OCNG Pattern Note 1			OP.3	OP.3	As defined in A.3.2.1.
PDSCH Reference Channel Note 2	Config 1		SR3.1 TDD	SR3.1 TDD	As defined in A.3.1B.1.

NR RF Channel Number		1	1	
EPRE ratio of PSS to SSS	dB	0	0	
EPRE ratio of PBCH_DMRS to SSS	dB			
EPRE ratio of PBCH to PBCH_DMRS	dB			
EPRE ratio of PDCCH_DMRS to SSS	dB			
EPRE ratio of PDCCH to PDCCH_DMRS	dB			
EPRE ratio of PDSCH_DMRS to SSS	dB			
EPRE ratio of PDSCH to PDSCH_DMRS	dB			
ss-PBCH-BlockPower	dBm/ SCS	+20 +Δ_{UL}	+20 +Δ_{UL}	As defined in TS 38.331 [2]. Δ_{UL} is derived from the uplink calibration process Note 3
Configured UE transmitted power ($P_{CMAX,\ f,c}$)	dBm	maximum value configurable for certain power class	maximum value configurable for certain power class	As defined in clause 6.2.4 in TS 38.101-2 [19]
PRACH Configuration		FR2 PRACH configuration 2	FR2 PRACH configuration 3	As defined in A.3.8B.3, with exceptions as defined below.
rsrp-ThresholdSSB	dBm	RSRP_69 +Δ_{DL}	RSRP_69 +Δ_{DL}	RSRP_69 corresponds to -88dBm. Δ_{DL} is derived from the downlink calibration process Note 4
preambleReceivedTargetPower	dBm	-100	-100	As defined in TS 38.331 [2]

Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.

Note 2: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.

Note 3: The Δ_{UL} value is calculated as -ROUND(P_{PRACH0} -1), where P_{PRACH0} is the measured first PRACH power with -80.6dBm/SCS applied, *preambleReceivedTargetPower* = -100dBm and *ss-PBCH-BlockPower* = 20dBm. These values are used during the uplink calibration process carried out before the test case is run, with the UE configured to send PRACH.

Note 4: The Δ_{DL} value is calculated as ($RSRP_{REP}$ – RSRP_76), where $RSRP_{REP}$ is the SS-RSRP Reported value in Table 10.1.6.1-1 with -80.6dBm/SCS applied. These values are used during the downlink calibration process carried out before the test case is run, with the UE configured to report SS-RSRP. For a Reported value RSRP_x, x is treated as a positive integer value.

Table A.17.3.2.2.2.1-3: OTA-related test parameters for non-contention based random access test in FR2 for NR Standalone

Parameter		Unit	Test-1	Test-2	Comments
AoA setup			Setup 1	Setup 1	As defined in A.3.15.1
Assumption for UE beams Note 3			Rough	Rough	
SSB with index 0	Es Note1	dBm/SCS	-80.6	-80.6	Power of SSB with index 0 is set to be above configured *rsrp-ThresholdSSB*
	SSB_RP	dBm/SCS	-80.6	-80.6	

	Es/Iot_{BB}	dB	21.09	21.09	
	Io	dBm/95.04 MHz	-56.01	-56.01	Io in symbols containing SSB index 0
SSB with index 1	Es Note1	dBm/SCS	-95.0	-95.0	Power of SSB with index 1 is set to be below configured *rsrp-ThresholdSSB*
	SSB_RP	dBm/SCS	-95.0	-95.0	
	Es/Iot_{BB}	dB	6.69	6.69	
	Io	dBm/95.04 MHz	-70.41	-70.41	Io in symbols containing SSB index 1
Propagation Condition		-	AWGN	AWGN	

Note 1: No articial noise is applied in this test.
Note 2: void.
Note 3: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.17.3.2.2.2.2 Test Requirements

Non-Contention based random access is triggered by explicitly assigning a random access preamble via dedicated signalling in the downlink. In the test, the non-contention based random access procedure is not initialized for Other SI requested from UE or beam failure recovery.

A.17.3.2.2.2.2.1 SSB-based Random Access Preamble Transmission

To test the UE behavior specified in Clause 6.2.2.2.2.1 for SSB-based Random Access Preamble tranmsision, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs configured, the System Simulator shall receive the Random Access Preamble which has the Preamble Index associated with the SSB with index 0.

In addition, the System Simulator shall receive the Random Access Preamble on the PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0, and the selected PRACH occasion shall belongs to the PRACH occassions permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.7.3.2.2.2.2.2 CSI-RS-based Random Access Preamble Transmission

In Test-1, to test the UE behavior specified in Clause 6.2.2.2.2.1 for CSI-RS-based Random Access Preamble tranmsision, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with CSI-RSs configured, the System Simulator shall receive the Random Access Preamble which has the Preamble Index associated with the CSI-RS configured.

In addition, the System Simulator shall receive the Random Access Preamble on the PRACH occasion which belongs to the PRACH occasions corresponding to the CSI-RS configured, and the selected PRACH occasion shall belongs to the PRACH occassions permitted by the restrictions given by the *ra-OccasionList*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.17.3.2.2.2.2.3 Random Access Response Reception

To test the UE behavior specified in Clause 6.2.2.2.2.2 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 3 preambles have been received by the System Simulator. In response to the first 2 preambles, the System Simulator shall transmit a Random Access Response *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for Random Access Response(s) if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.17.3.2.2.2.2.4 No Random Access Response Reception

To test the UE behavior specified in clause 6.2.2.2.2.3 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 3 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 2 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window configured in *RACH-ConfigCommon*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.17.3.2.2.3 2-step RA type contention based random access test in FR2 for NR Standalone

A.17.3.2.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the 2-step RA type random access procedure is according to the requirements and that the MsgA PRACH, MsgA PUSCH power settings and timing are within specified limits. This test will verify the requirements in Clause 6.2.2B.2 and Clause 7.1A.2 in an AWGN model.

For this test one cell is used, with the configuration of Cell 1 configured as PCell or SCell in FR2. Supported test parameters are shown in Table A.17.3.2.2.3.1-1. UE capable of SA with PCell or SCell in FR2 needs to be tested by using the parameters in Table A.17.3.2.2.3.1-2 and Table A.17.3.2.2.3.1-3.

Table A.17.3.2.2.3.1-1: Supported test configurations for 2-step RA type contention based random access test in FR2 for NR Standalone

Config	Description
1	NR PSCell/SCell 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.17.3.2.2.3.1-2: General test parameters for 2-step RA type contention based random access test in FR2 for NR Standalone

Parameter		Unit	Test-1	Comments
SSB Configuration	Config 1		SSB.3 FR2	As defined in A.3.10
Duplex Mode for Cell 1	Config 1		TDD	
TDD Configuration	Config 1		TDDConf.3.1	As defined in A.3.1.4
$BW_{channel}$	Config 1	MHz	100: $N_{RB,c}$ = 24	
OCNG Pattern Note 1			OCNG pattern 1	As defined in A.3.2.1.
PDSCH Reference Channel Note 2	Config 1		SR.3.1 TDD	As defined in A.3.1.1.
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD	As defined in A.3.1.2
NR RF Channel Number			1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH_DMRS to SSS		dB		
EPRE ratio of PBCH to PBCH_DMRS		dB		
EPRE ratio of PDCCH_DMRS to SSS		dB		
EPRE ratio of PDCCH to PDCCH_DMRS		dB		
EPRE ratio of PDSCH_DMRS to SSS		dB		
EPRE ratio of PDSCH to PDSCH_DMRS		dB		
ss-PBCH-BlockPower		dBm/ SCS	+20 +Δ_{UL}	As defined in TS 38.331 [2]. Δ_{UL} is derived from the uplink calibration process Note 3
Configured UE transmitted power ($P_{CMAX,\ f,c}$)		dBm	maximum value configurable for certain power class	As defined in clause 6.2.4 in TS 38.101-2 [19]
MsgA Configuration			FR2 MsgA configuration 1	As defined in A.3.20.3, with exceptions as defined below
msgA-RSRP-ThresholdSSB		dBm	RSRP_69 +Δ_{DL}	RSRP_69 corresponds to -88dBm. Δ_{DL} is derived from the downlink calibration process Note 4
preambleReceivedTargetPower		dBm	-100	As defined in TS 38.331 [2]

Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.

Note 2: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.

Note 3: The Δ_{UL} value is calculated as -ROUND(PMsgA0 -1), where PMsgA0 is the measured first MsgA PRACH power with -80.6dBm/SCS applied, *msgA-PreambleReceivedTargetPower* = -100dBm and *ss-PBCH-BlockPower* = 20dBm. These values are used during the uplink calibration process carried out before the test case is run, with the UE configured to send MsgA.

Note 4: The Δ_{DL} value is calculated as (RSRP_$_{REP}$ – RSRP_76), where RSRP_$_{REP}$ is the SS-RSRP Reported value in Table 10.1.6.1-1 with -80.6dBm/SCS applied. These values are used during the downlink calibration process carried out before the test case is run, with the UE configured to report SS-RSRP. For a Reported value RSRP_x, x is treated as a positive integer value.

Table A.17.3.2.2.3.1-3: OTA-related test parameters for 2-step RA type contention based random access test in FR2 for NR Standalone

Parameter		Unit	Test-1	Comments
AoA setup			Setup 2b	As defined in A.3.15.2
Assumption for UE beams[Note 2]			Rough	
SSB with index 0	Es [Note1]	dBm/SCS	-80.6	Power of SSB with index 0 is set to be above configured *msgA-RSRP-ThresholdSSB*
	SSB_RP	dBm/SCS	-80.6	
	Es/Iot_{BB}	dB	21.09	
	Io	dBm/95.04 MHz	-56.01	Io in symbols containing SSB index 0
SSB with index 1	Es [Note1]	dBm/SCS	-95.0	Power of SSB with index 1 is set to be below configured *msgA-RSRP-ThresholdSSB*
	SSB_RP	dBm/SCS	-95.0	
	Es/Iot_{BB}	dB	6.69	
	Io	dBm/95.04 MHz	-70.41	Io in symbols containing SSB index 1
Propagation Condition		-	AWGN	

Note 1: No articial noise is applied in this test.
Note 2: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.17.3.2.2.3.2 Test Requirements

Contention based random access is triggered by *not* explicitly assigning a random access preamble via dedicated signalling in the downlink.

A.17.3.2.2.3.2.1 MsgA Transmission

To test the UE behavior specified in Clause 6.2.2.3.1.1 the System Simulator shall receive the MsgA with a preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SS-RSRP above the configured *msgA-RSRP-ThresholdSSB.*

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first MsgA preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.17.3.2.2.3.2.2 MsgB Reception

To test the UE behavior specified in Clause 6.2.2.3.1.2 the System Simulator shall transmit a MsgB containing a fallbackRAR message and a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 3 preambles have been received by the System Simulator. In response to the first 2 preambles, the System Simulator shall transmit a MsgB *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for MsgB(s) and shall transmit the msg3 if the MsgB with a fallbackRAR contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit MsgA with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires if all received MsgB's contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first MsgA PRACH shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.17.3.2.2.3.2.3 No MsgB Reception

To test the UE behavior specified in clause 6.2.2.3.1.3 the System Simulator shall transmit a MsgB containing a fallbackRAR message and Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 3 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 2 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires if no MsgB is received within the MsgB Response window.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first MsgA PRACH shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.17.3.2.2.4 2-step RA type non-contention based random access test in FR2 for NR Standalone

A.17.3.2.2.4.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the MsgA PRACH, MsgA PUSCH power settings and timing are within specified limits. This test will verify the requirements in Clause 6.2.2B.2 and Clause 7.1A.2 in an AWGN model.

For this test one cell is used, with the configuration of Cell 1 configured as PCell or SCell in FR2. Supported test parameters are shown in Table A.17.3.2.2.4.1-1. UE capable of SA with PCell or SCell in FR2 needs to be tested by using the parameters in Table A.17.3.2.2.4.1-2 and Table A.17.3.2.2.4.1-3.

Table A.17.3.2.2.4.1-1: Supported test configurations for non-contention based random access test for 2-step RA type in FR2 for NR Standalone

Config	Description
1	NR PSCell/SCell 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.17.3.2.2.4.1-2: General test parameters for non-contention based random access test for 2-step RA type in FR2 for NR Standalone

Parameter		Unit	Test-1	Comments
SSB Configuration	Config 1		SSB.3 FR2	As defined in A.3.10
Duplex Mode for Cell 2	Config 1		TDD	
TDD Configuration	Config 1		TDDConf.3.1	

$BW_{channel}$	Config 1	MHz	100: $N_{RB,c}$ = 24	
OCNG Pattern Note 1			OP.3	As defined in A.3.2.1.
PDSCH Reference Channel Note 2	Config 1		SR3.1 TDD	As defined in A.3.1.1.
NR RF Channel Number			1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH_DMRS to SSS		dB		
EPRE ratio of PBCH to PBCH_DMRS		dB		
EPRE ratio of PDCCH_DMRS to SSS		dB		
EPRE ratio of PDCCH to PDCCH_DMRS		dB		
EPRE ratio of PDSCH_DMRS to SSS		dB		
EPRE ratio of PDSCH to PDSCH_DMRS		dB		
ss-PBCH-BlockPower		dBm/ SCS	+20 +Δ_{UL}	As defined in TS 38.331 [2]. Δ_{UL} is derived from the uplink calibration process Note 3
Configured UE transmitted power ($P_{CMAX,f,c}$)		dBm	maximum value configurable for certain power class	As defined in clause 6.2.4 in TS 38.101-2 [19]
MsgA Configuration			FR2 MsgA configuration 2	As defined in A.3.20.3, with exceptions as defined below.
msgA-RSRP-ThresholdSSB		dBm	RSRP_69 +Δ_{DL}	RSRP_69 corresponds to -88dBm. Δ_{DL} is derived from the downlink calibration process Note 4
msgA-PreambleReceivedTargetPower		dBm	-100	As defined in TS 38.331 [2]

Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.

Note 2: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.

Note 3: The Δ_{UL} value is calculated as -ROUND(P_{MsgA0} -1), where P_{MsgA0} is the measured first MsgA PRACH power with -80.6dBm/SCS applied, *msgA-PreambleReceivedTargetPower* = -100dBm and *ss-PBCH-BlockPower* = 20dBm. These values are used during the uplink calibration process carried out before the test case is run, with the UE configured to send MsgA.

Note 4: The Δ_{DL} value is calculated as ($RSRP_{REP}$ – RSRP_76), where $RSRP_{REP}$ is the SS-RSRP Reported value in Table 10.1.6.1-1 with -80.6dBm/SCS applied. These values are used during the downlink calibration process carried out before the test case is run, with the UE configured to report SS-RSRP. For a Reported value RSRP_x, x is treated as a positive integer value.

Table A.17.3.2.2.4.1-3: OTA-related test parameters for non-contention based random access test for 2-step RA type in FR2 for NR Standalone

Parameter		Unit	Test-1	Comments
AoA setup			Setup 1	As defined in A.3.15.1
Assumption for UE beams Note 2			Rough	
SSB with index 0	Es Note1	dBm/SCS	-80.6	Power of SSB with index 0 is set to be above configured *msgA-RSRP-ThresholdSSB*
	SSB_RP	dBm/SCS	-80.6	
	Es/Iot_{BB}	dB	21.09	

	Io	dBm/95.04 MHz	-56.01	Io in symbols containing SSB index 0
SSB with index 1	Es Note1	dBm/SCS	-95.0	Power of SSB with index 1 is set to be below configured *msgA-RSRP-ThresholdSSB*
	SSB_RP	dBm/SCS	-95.0	
	Es/Iot_{BB}	dB	6.69	
	Io	dBm/95.04 MHz	-70.41	Io in symbols containing SSB index 1
Propagation Condition		-	AWGN	
Note 1: No artificial noise is applied in this test. Note 2: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.17.3.2.2.4.2 Test Requirements

Non-Contention based random access is triggered by explicitly assigning a random access preamble via dedicated signalling in the downlink. In the test, the non-contention based random access procedure is not initialized for Other SI requested from UE or beam failure recovery.

A.17.3.2.2.4.2.1 MsgA Transmission

In Test-1, to test the UE behavior specified in Clause 6.2.2.3.2.1 for MsgA transmission, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs configured, the System Simulator shall receive the MsgA which has the Preamble Index associated with the SSB with index 0.

In addition, the System Simulator shall receive the MsgA on the PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0, and the selected PRACH occasion shall belongs to the PRACH occasions permitted by the restrictions given first by the *msgA-SSB-SharedRO-MaskIndex* if configured, or next by the *ra-ssb-OccasionMaskIndex* if configured.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.17.3.2.2.4.2.2 MsgB Reception

To test the UE behavior specified in Clause 6.2.2.3.2.2 the System Simulator shall transmit a MsgB containing a successRAR MAC subPDU corresponding to the transmitted Random Access Preamble after 3 MsgA transmissions have been received by the System Simulator. In response to the first 2 preambles, the System Simulator shall transmit a MsgB *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for MsgB if the MsgB contains a successRAR MAC subPDU corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA transmission power if all received Random Access Response Reception has not been considered as successful.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19], where μ indicates the MsgA PUSCH numerology.

The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.17.3.2.2.4.2.3 No MsgB Reception

To test the UE behavior specified in clause 6.2.2.3.2.3 the System Simulator shall transmit a MsgB corresponding to the transmitted Random Access Preamble after 3 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 2 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA transmission power when the backoff time expires if no MsgB is received within the MsgB Response window configured in *RACH-ConfigGenericTwoStepRA*.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.17.3.2.3 SA: RRC Connection Release with Redirection

A.17.3.2.3.1 Redirection from NR in FR2 to NR in FR2

A.17.3.2.3.1.1 Test Purpose and Environment

This test is to verify RRC connection release with redirection from NR to NR requirements specified in clause 6.2.3.2.1.

A.17.3.2.3.1.2 Test Parameters

Supported test configurations are shown in table A.17.3.2.3.1.2-1. The time delay is tested by using the parameters in table A.17.3.2.3.1.2-2, and A.17.3.2.3.1.2-3.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. The *RRCRelease* message shall be sent to the UE during period T1 and the start of T2 is the instant when the last TTI containing the RRC message is sent to the UE. Prior to time duration T2, the UE shall not have any timing information of Cell 2. Cell 2 is powered up at the beginning of the T2.

Table A.17.3.2.3.1.2-1: Redirection from NR to NR test configurations

Config	Description
1	Source cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.17.3.2.3.1.2-2: General test parameters for Redirection from NR to NR test case

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
Filter coefficient			0	L3 filtering is not used

Access Barring Information	-	Not Sent	No additional delays in random access procedure.
Time offset between cells		3 μs	Synchronous cells
T1	s	5	
T2	s	3.2	

Table A.17.3.2.3.1.2-3: Cell specific test parameters for Redirection from NR to NR test case

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
Assumption for UE beams Note 6			Rough		Rough	
AoA setup			Setup 1as defined in A.3.15			
NR RF Channel Number			1		2	
Duplex mode			TDD			
TDD configuration			TDDConf.3.1			
$BW_{channel}$		MHz	100: $N_{RB,c}$ = 66			
BWP BW		MHz	100: $N_{RB,c}$ = 66			
Data RBs allocated			66			
DRx Cycle		ms	Not Applicable			
PDSCH Reference measurement channel			SR3.1 TDD			
RMSI CORESET Reference Channel			CR3.1 TDD			
Control Channel RMC			CCR.3.1 TDD			
OCNG Patterns			O P. 1			
SMTC configuration			SMTC.1 FR2			
SSB Configuration			SSB.3 FR2			
PDSCH/PDCCH subcarrier spacing		kHz	120 kHz			
PUCCH/PUSCH subcarrier spacing		kHz	120 kHz			
PRACH configuration			FR2 PRACH configuration 1			
TRS configuration			TRS.2.1 TDD			
PDSCH/PDCCH TCI state			TCI.State.2			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS EPRE ratio of PBCH DMRS to SSS EPRE ratio of PBCH to PBCH DMRS EPRE ratio of PDCCH DMRS to SSS EPRE ratio of PDCCH to PDCCH DMRS EPRE ratio of PDSCH DMRS to SSS EPRE ratio of PDSCH to PDSCH EPRE ratio of OCNG DMRS to SSS(Note 1) EPRE ratio of OCNG to OCNG DMRS (Note 1)		dB	0		0	
N_{oc} Note2		dBm/15kHz	-104.7		-104.7	
N_{oc} Note2		dBm/SCS	-95.7		-95.7	
$\hat{E}_s / I_{ot}$		dB	5	5	-Infinity	5
$\hat{E}_s / N_{oc}$		dB	5	5	-Infinity	5
Io Note3		dBm/BW	-60.5	-60.5	-66.7	-60.5
Propagation condition		-	AWGN		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						

Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5:	As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 6:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.17.3.2.3.1.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 3160 ms from the beginning of time period T2.

The rate of correct RRC connection release redirection to NR observed during repeated tests shall be at least 90%.

NOTE: The redirection delay can be expressed as:

$$T_{connection_release_redirect_NR} = T_{RRC_procedure_delay} + T_{identify\text{-}NR} + T_{SI\text{-}NR} + T_{RACH},$$

where:

$T_{RRC_procedure_delay}$ = 110 ms in the test.

$T_{identify\text{-}NR}$ = 1760 ms in the test.

$T_{SI\text{-}NR}$ = 1280 ms, it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target NR cell.

T_{RACH} = 10 ms in the test.

This gives a total of 3160 ms.

A.17.4 Timing

A.17.4.1 UE transmit timing

A.17.4.1.1 NR UE Transmit Timing Test for FR2

A.17.4.1.1.1 Test Purpose and environment

The purpose of this test is to verify that the UE can follow frame timing change of the connected gNodeb and that the UE initial transmit timing accuracy, maximum amount of timing change in one adjustment, minimum and maximum adjustment rate are within the specified limits. This test will verify the requirements in clause 7.1.2.

Supported test configurations are shown in Table A.17.4.1.1.1-1.

Table A.17.4.1.1.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	NR TDD, SSB SCS 240 kHz, data SCS 120 kHz, BW 100 MHz

For this test a single NR cell is used. Tables A.17.4.1.1.1-2 and A.17.4.1.1.1-2A define the parameters to be configured and strength of the transmitted signals. The transmit timing is verified by the UE transmitting SRS using the configuration defined in Table A.17.4.1.1.1-3.

Table A.17.4.1.1.1-2: Cell Specific Test Parameters for UL Transmit Timing test

Parameter	Unit	Config	Test1	Test2
SSB ARFCN		1	Freq1	Freq1
TDD configuration		1	TDDConf.3.1	
$BW_{channel}$	MHz	1	100: $N_{RB,c}$ = 66	
Data RBs allocated		1	66	
Initial BWP Configuration		1	DLBWP.0.1 ULBWP.0.1	
Dedicated BWP Configuration		1	DLBWP.1.1 ULBWP.1.1	
TRS Configuration		1	TRS.2.1 TDD	
PDSCH/PDCCH TCI state		1	TCI.State.2	
DRx Cycle	ms	1	N/A	DRX.8[Note5]
PDSCH Reference measurement channel		1	SR.3. 3 TDD	
RMSI CORESET Reference Channel		1	CR.3. 2 TDD	
Dedicated CORESET Reference Channel		1	CCR.3. 7 TDD	
OCNG Patterns		1	OP.1	
SSB Configuration		1	SSB.1 FR2	
SMTC Configuration		1	SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	1	120	
EPRE ratio of PSS to SSS	dB	1	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
Propagation condition		1	AWGN	
SRS Config		1	SRSConf.1[Note6]	SRSConf.2[Note6]

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: Void
Note 4: Void
Note 5: DRx related parameters are given in Table A.3.3.8-1
Note 6: SRS configs are given in Table A.17.4.1.1.1-3

Table A.17.4.1.1.1-2A: OTA related test parameters

Parameter	Unit	Test 1	Test 2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1	

Assumption for UE beams[Note 6]		Fine
N_{oc} [Note1]	dBm/15kHz[Note4]	-112
N_{oc} [Note1]	dBm/SCS[Note3]	-100
$\hat{E}_s / N_{oc}$	dB	4
SS-RSRP[Note2]	dBm/SCS [Note4]	-96
$\hat{E}_s / I_{ot}$	dB	4
Io[Note2]	dBm/95.04 MHz [Note4]	-68.5

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 2: SS B_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 3: Void

Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone

Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone

Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Table A.17.4.1.1.1-3: SRS Configuration for Timing Accuracy Test

	Field	SRSConf.1	SRSConf.2	Comments
SRS-ResourceSet	srs-ResourceSetId	0	0	
	srs-ResourceIdList	0	0	
	resourceType	Periodic	Periodic	
	Usage	Codebook	Codebook	
SRS-Resource	SRS-ResourceId	0	0	
	nrofSRS-Ports	Port1	Port1	
	transmissionComb	n2	n2	
	combOffset-n2	0	0	
	cyclicShift-n2	0	0	
	resourceMapping startPosition	0	0	
	resourceMapping nrofSymbols	n1	n1	
	resourceMapping repetitionFactor	n1	n1	
	freqDomainPosition	0	0	
	freqDomainShift	0	0	
	freqHopping c-SRS	17	17	Matches $N_{RB,c}$
	freqHopping b-SRS	0	0	
	freqHopping b-hop	0	0	
	groupOrSequenceHopping	Neither	Neither	
	resourceType	Periodic	Periodic	
	periodicityAndOffset-p	sl1, 0	sl2560, 4	Offset to align with DRx periodicity
	sequenceId	0	0	Any 10 bit number

Table A.17.4.1.1.1-4: Void

A.17.4.1.1.2 Test requirements

The test sequence shall be carried out in RRC_CONNECTED for every test case.

Following will be the test sequence for this test:

1) Setup NR PCell according to parameters given in Table A.17.4.1.1.1-1.
2) After connection set up with the cell, the test equipment will verify that the timing of the NR cell is within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first detected path of DL SSB.
   a. The N_{TA} offset value (in T_c units) is 13792
   b. The T_e values depend on the DL and UL SCS for which the test is being run and are given in Table 7.1.2-1
3) The test system shall adjust the timing of the DL path by values given in Table A.17.4.1.1.2-1

Table A.17.4.1.1.2-1 Adjustment Value for DL Timing

SCS of SSB signals (kHz)	Adjustment Value	
	Test1	Test2
240	$+8*64T_c$	$+4*64T_c$

4) The test system shall verify that the adjustment step size and the adjustment rate shall be according to requirements specified in clause 7.1.2 Table 7.1.2.1-1 until the UE transmit timing offset is within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ respective to the first detected path (in time) of DL SSB. Skip this step for test 2 with DRX confiured.
5) The test system shall verify that the UE transmit timing offset stays within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first detected path of DL SSB. For Test 2 the UE transmit timing offset shall be verified for the first transmission in the DRX cycle immediately after DL timing adjustment.

A.17.4.2 UE timer accuracy

A.17.4.3 Timing advance

A.17.4.3.1 SA FR2 timing advance adjustment accuracy

A.17.4.3.1.1 Test Purpose and Environment

The purpose of the test is to verify UE Timing Advance adjustment delay and accuracy requirement defined in clause 7.3.

A.17.4.3.1.2 Test Parameters

Supported test configurations are shown in table A.17.4.3.1.2-1. Both timing advance adjustment delay and accuracy are tested by using the parameters in table A.17.4.3.1.2-2, A.17.4.3.1.2-3 and A.17.4.3.1.2-4.

In all test cases, single cell is used. Each test consists of two successive time periods, with time duration of T1 and T2 respectively. In each time period, timing advance commands are sent to the UE and Sounding Reference Signals (SRS), as specified in table A.17.4.3.1.2-3, are sent from the UE and received by the test equipment. By measuring the reception of the SRS, the transmit timing, and hence the timing advance adjustment accuracy, can be measured.

During time period T1, the test equipment shall send one message with a Timing Advance Command MAC Control Element, as specified in clause 6.1.3.4 in TS 38.321 [7]. The Timing Advance Command value shall be set to 31,

which according to clause 4.2 in TS 38.213 [3] results in zero adjustment of the Timing Advance. In this way, a reference value for the timing advance used by the UE is established.

During time period T2, the test equipment shall send a sequence of messages with Timing Advance Command MAC Control Elements, with Timing Advance Command value specified in table A.17.4.3.1.2-2. This value shall result in changes of the timing advance used by the UE, and the accuracy of the change shall then be measured, using the SRS sent from the UE.

As specified in Clause 7.3.2.1, the UE adjusts its uplink timing at slot n+k for a timing advance command received in slot n. This delay must be taken into account when measuring the timing advance adjustment accuracy, via the SRS sent from the UE.

The UE Time Alignment Timer, described in Clause 5.2 in TS 38.321 [7], shall be configured so that it does not expire in the duration of the test.

Table A.17.4.3.1.2-1: Timing advance supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.17.4.3.1.2-2: General test parameters for timing advance

Parameter	Unit	Value	Comment
RF channel number		1	
Initial DL BWP		DLBWP.0.1	As specified in Table A.3.9.2.1-1
Dedicated DL BWP		DLBWP.1.1	As specified in Table A.3.9.2.2-1
Initial UL BWP		ULBWP.0.1	As specified in Table A.3.9.3.1-1
Dedicated UL BWP		ULBWP.1.1	As specified in Table A.3.9.3.2-1
Timing Advance Command (T_A) value during T1		31	$N_{TA_new} = N_{TA_old}$ for the purpose of establishing a reference value from which the timing advance adjustment accuracy can be measured during T2
Timing Advance Command (T_A) value during T2		39	*For 120 kHz SCS* $N_{TA_new} = N_{TA_old} + 1024*T_c$ (based on equation in clause 4.2 of TS 38.213 [3])
T1	s	5	
T2	s	5	

Table A.17.4.3.1.2-3: Cell specific test parameters for timing advance

Parameter	Unit	Test1	
		T1	T2
Duplex mode		TDD	
TDD configuration		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66	
BWP BW	MHz	100: $N_{RB,c}$ = 66	
DRx Cycle	ms	Not Applicable	
PDSCH Reference measurement channel		SR.3.1 TDD	
CORESET Reference Channel		CR.3.1 TDD	
OCNG Patterns		OCNG pattern 1	
TRS configuration		TRS.2.1 TDD	
PDSCH/PDCCH TCI state		TCI.State.2	
SMTC configuration		SMTC.1 FR2	
SSB Configuration		SSB.1 FR2	
PDSCH/PDCCH subcarrier spacing	kHz	120 kHz	
PUCCH/PUSCH subcarrier spacing	kHz	120 kHz	
EPRE ratio of PSS to SSS	dB	0	
EPRE ratio of PBCH DMRS to SSS			

EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation condition	-	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone

Table A.17.4.3.1.2-3A: OTA related test parameters

Parameter	Unit	Test 1	
		T1	T2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1	
Assumption for UE beams[Note 6]		Fine	
N_{oc} [Note1]	dBm/15kHz[Note4]	-112	
N_{oc} [Note1]	dBm/SCS[Note3]	-103	
$\hat{E}_s / N_{oc}$	dB	4	
SS-RSRP[Note2]	dBm/SCS [Note4]	-99	
$\hat{E}_s / I_{ot}$	dB	4	
Io[Note2]	dBm/95.04 MHz [Note4]	-68.5	

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Table A.17.4.3.1.2-4: Sounding Reference Symbol Configuration for timing advance

Field	Value	Comment
c-SRS	16	Frequency hopping is disabled
b-SRS	0	
b-hop	0	
freqDomainPosition	0	Frequency domain position of SRS
freqDomainShift	0	

groupOrSequenceHopping	neither	No group or sequence hopping
SRS-PeriodicityAndOffset	sl5=0	Once every 5 slots
pathlossReferenceRS	ssb-Index=0	SSB #0 is used for SRS path loss estimation
usage	Codebook	Codebook based UL transmission
startPosition	0	resourceMapping setting. SRS on last symbol of slot, and 1symbols for SRS without repetition.
nrofSymbols	n1	
repetitionFactor	n1	
combOffset-n2	0	transmissionComb setting
cyclicShift-n2	0	
nrofSRS-Ports	port1	Number of antenna ports used for SRS transmission
Note: For further information see clause 6.3.2 in TS 38.331 [2].		

A.17.4.3.1.3 Test Requirements

The UE shall apply the signalled Timing Advance value to the transmission timing at the designated activation time i.e. *k+1* slots after the reception of the timing advance command, where *k* = 11.

The Timing Advance adjustment accuracy shall be within the limits specified in clause 7.3.2.2.

The rate of correct Timing Advance adjustments observed during repeated tests shall be at least 90%.

A.17.4.2 UE timer accuracy

A.17.4.3 Timing advance

A.17.4.3.1 SA FR2 timing advance adjustment accuracy

A.17.5 Signaling characteristics for RedCap

A.17.5.1 Radio link Monitoring for RedCap

A.17.5.1.1 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with SSB-based RLM RS in non-DRX mode

A.17.5.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell. This test will partly verify the FR2 radio link monitoring requirements in clause 8.1B.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to '*rlf*'. Supported test configurations are shown in table A.17.5.1.1 .1-1. The test parameters are given in Tables A.17.5.1.1 .1-2, A.17.5.1.1 .1-3, and A.17.5.1.1 .1-4 below. There is one cell (Cell 1), which is the active NR cell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.17.5.1.1 .1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states, and Figure A.17.5.1.1 .1-2 shows the Time multiplexed downlink transmissions from each Angle of Arrival. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms.

In addition to RLM-RS radio link monitoring using SSB index 0 and SSB index 1, the UE is configured to perform inter-frequency measurements using Gap Pattern ID #0 (40ms) in test 1.

Table A.17.5.1.1 .1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	TDD, SSB SCS 120 KHz, data SCS 120KHz, BW 100 MHz

Table A.17.5.1.1 .1-2: General test parameters for FR2 out-of-sync testing in non-DRX mode

Parameter			Unit	Value
				Test 1
Active PCell				Cell 1
RF Channel Number				1
Duplex mode		Config 1		TDD
$BW_{channel}$		Config 1		100: $N_{RB,c}$ = 66
Data RBs allocated		Config 1		24
DL initial BWP configuration		Config 1		DLBWP.0.1
DL dedicated BWP configuration		Config 1		DLBWP.1.1
UL initial BWP configuration		Config 1		ULBWP.0.1
UL dedicated BWP configuration		Config 1		ULBWP.1.1
TDD Configuration		Config 1		TDDConf.3.1
RMSI CORESET Reference Channel		Config 1		CR.3.1 TDD
Dedicated CORESET Reference Channel		Config 1		CCR.3.4 TDD
SSB Configuration		Config 1		SSB.1 FR2
SMTC Configuration		Config 1		SMTC.1
PDSCH/PDCCH subcarrier spacing		Config 1		120 KHz
PRACH Configuration		Config 1		Table A.3.8.3.4
SSB index assigned as RLM RS		Config 1		0,1
OCNG parameters				OP.5
CP length				Normal
Out of sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	4
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
DRX				*OFF*
Gap pattern ID				*gp0*
Layer 3 filtering				*Enabled*
T310 timer			ms	*0*
T311 timer			ms	1000
N310				1
N311				1
CSI-RS for CSI reporting		Config 1		CSI-RS.3.1 TDD
reportConfigType				periodic
reportQuantity				cri-RI-PMI-CQI
CSI reporting periodicity			slot	40
CSI reporting offset			slot	4
TCI states for PDCCH/PDSCH				TCI.State.2
CSI-RS for tracking		Config 1		TRS.2.1 TDD

T1	s	0.2
T2	s	9.68
T3	s	9.68
D1	s	9.64

Note 1: All configurations are assigned to the UE prior to the start of time period T1.
Note 2: UE-specific PDCCH is not transmitted after T1 starts.

Table A.17.5.1.1 .1-3: OTA related cell specific test parameters for FR2 (Cell 1) for out-of-sync radio link monitoring tests in non-DRX mode

Parameter		Unit	Test 1					
			T1	T2	T3	T1	T2	T3
AoA setup			Setup 3 defined in A.3.15					
			AoA1			AoA2		
Assumption for UE beams Note 5			Rough			Rough		
EPRE ratio of PDCCH DMRS to SSS		dB	4			Not sent		
EPRE ratio of PDCCH to PDCCH DMRS		dB	0					
EPRE ratio of PBCH DMRS to SSS		dB						
EPRE ratio of PBCH to PBCH DMRS		dB						
EPRE ratio of PSS to SSS		dB						
EPRE ratio of PDSCH DMRS to SSS		dB						
EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
ssb-Index 0 SNR	Config 1	dB	2 Note 6	-6 Note 6	-15			
ssb-Index 1 SNR	Config 1		Not sent			2 Note 6	-15	-15
N_{oc}	Config 1	dBm/ 15kHz	-92.1			-92.1		
Time multiplexing of the downlink transmissions from each AoA			Defined in Figure A.17.5.1.1 .1-2					
Propagation condition			TDL-A 30ns 75Hz			TDL-A 30ns 75Hz		

Note 1: OCNG shall be used such a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 4: The SNR values are specified for testing a UE which supports 2RX on at least one band..
Note 5: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 6: This value allows up to 1dB degradation from applied SNR to UE baseband

Table A.17.5.1.1 .1-4: Measurement gap configuration for out-of-sync tests in non-DRX mode

Field	Test 1
	Value
gapOffset	0

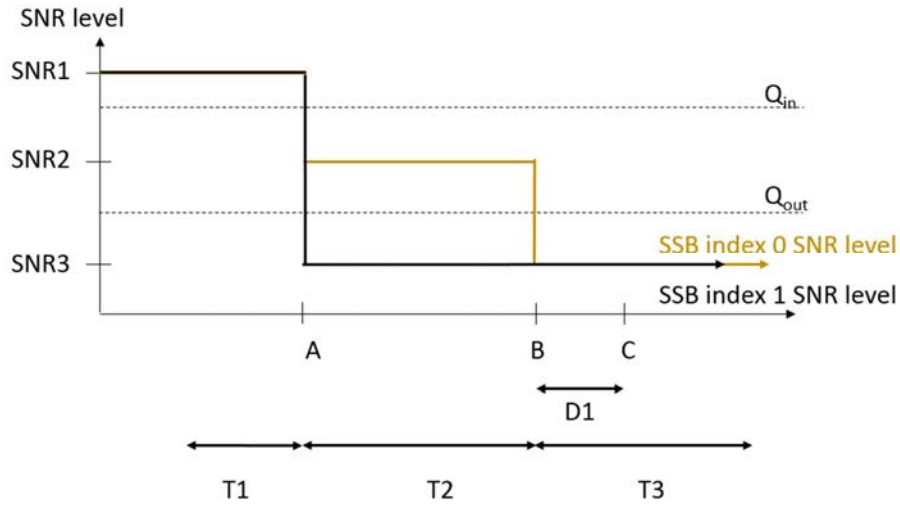

Figure A.17.5.1.1 .1-1: SNR variation for out-of-sync testing

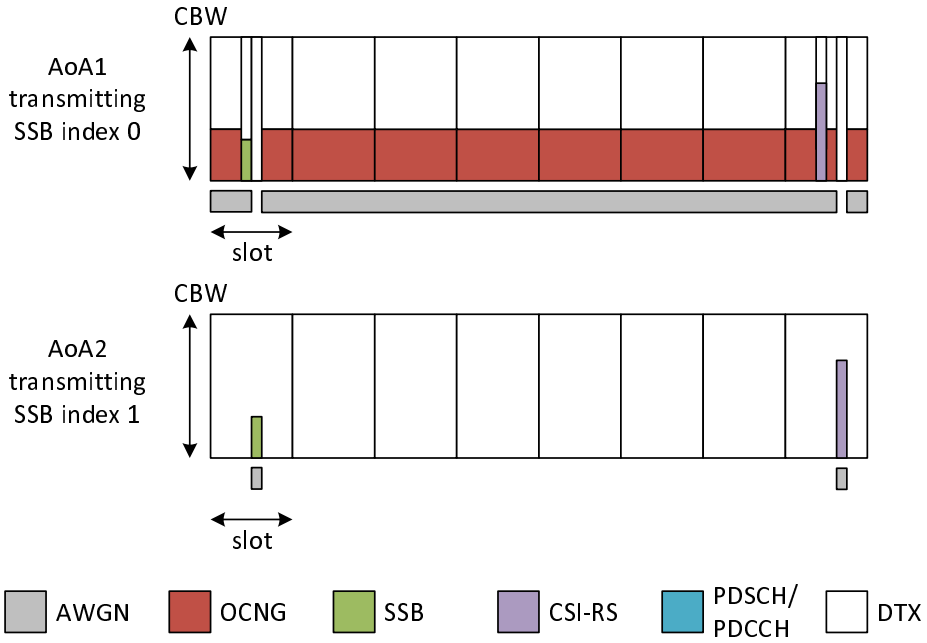

Figure A.17.5.1.1 .1-2: Time multiplexed downlink transmissions

A.17.5.1.1.2 Test Requirements

The UE behavior in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

A.17.5.1.2 Radio Link Monitoring In-sync Test for FR2 PCell configured with SSB-based RLM RS in non-DRX mode

A.17.5.1.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell. This test will partly verify the FR2 radio link monitoring requirements in clause 8.1B.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to '*rlf*'. Supported test configurations are shown in table A.17.5.1.2.1-1.The test parameters are given in Tables A.17.5.1.2.1-2, and A.17.5.1.2.1-3 below. There is one cell (Cell 1), which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.17.5.1.2.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states, and Figure A.17.5.1.2.1-2 shows the Time multiplexed downlink transmissions from each Angle of Arrival. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms.

Table A.17.5.1.2.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	TDD, SSB SCS 120 KHz, data SCS 120KHz, BW 100 MHz

Table A.17.5.1.2.1-2: General test parameters for FR2 in-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		TDD
$BW_{channel}$	Config 1		100: $N_{RB,c}$ = 66
Data RBs allocated	Config 1		24
DL initial BWP configuration	Config 1		DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.1
UL initial BWP configuration	Config 1		ULBWP.0.1
UL dedicated BWP configuration	Config 1		ULBWP.1.1
TDD Configuration	Config 1		TDDConf.3.1
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.3.1 TDD
SSB Configuration	Config 1		SSB.1 FR2
SMTC Configuration	Config 1		SMTC.3
PDSCH/PDCCH subcarrier spacing	Config 1		120 KHz
PRACH Configuration	Config 1		Table A.3.8.3.4
SSB index assigned as RLM RS	Config 1		0,1
OCNG parameters			OP.5
CP length			Normal
	DCI format		1-0
	Number of Control OFDM symbols		2

In sync transmission parameters	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			*OFF*
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*
T310 timer		ms	4000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1		CSI-RS.3.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
TCI states for PDCCH/PDSCH			TCI.State.2
CSI-RS for tracking	Config 1		TRS.2.1 TDD
T1		s	0.2
T2		s	0.2
T3		s	1.88
T4		s	0.2
T5		s	3.84
D1		s	3.8
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.17.5.1.2.1-3: OTA related cell specific test parameters for FR2 (Cell 1) for in-sync radio link monitoring tests in non-DRX mode

Parameter	Unit	Test 1									
		T1	T2	T3	T4	T5	T1	T2	T3	T4	T5
AoA setup		Setup 3 defined in A.3.15									
		AoA1					AoA2				
Assumption for UE beams Note 5		Rough					Rough				
EPRE ratio of PDCCH DMRS to SSS	dB	0					Not sent				
EPRE ratio of PDCCH to PDCCH DMRS	dB	0									
EPRE ratio of PBCH DMRS to SSS	dB										
EPRE ratio of PBCH to PBCH DMRS	dB										
EPRE ratio of PSS to SSS	dB										
EPRE ratio of PDSCH DMRS to SSS	dB										
EPRE ratio of PDSCH to PDSCH DMRS	dB										
EPRE ratio of OCNG DMRS to SSS	dB										

EPRE ratio of OCNG to OCNG DMRS		dB										
ssb-Index 0 SNR	Config 1	dB	2 Note 6	-6 Note 6	-15	-4.5	2 Note 6					
ssb-Index 1 SNR	Config 1		Not sent					2 Note 6	-15	-15	-15	-15
N_{oc}	Config 1	dBm/ 15kHz	-92.1					-92.1				
Time multiplexing of the downlink transmissions from each AoA			Defined in Figure A.17.5.1.2.1-2									
Propagation condition			TDL-A 30ns 75Hz					TDL-A 30ns 75Hz				

Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 4: The SNR values are specified for testing a UE which supports 2RX on at least one band.
Note 5: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 6: This value allows up to 1dB degradation from applied SNR to UE baseband

Table A.17.5.1.2.1-4: Void

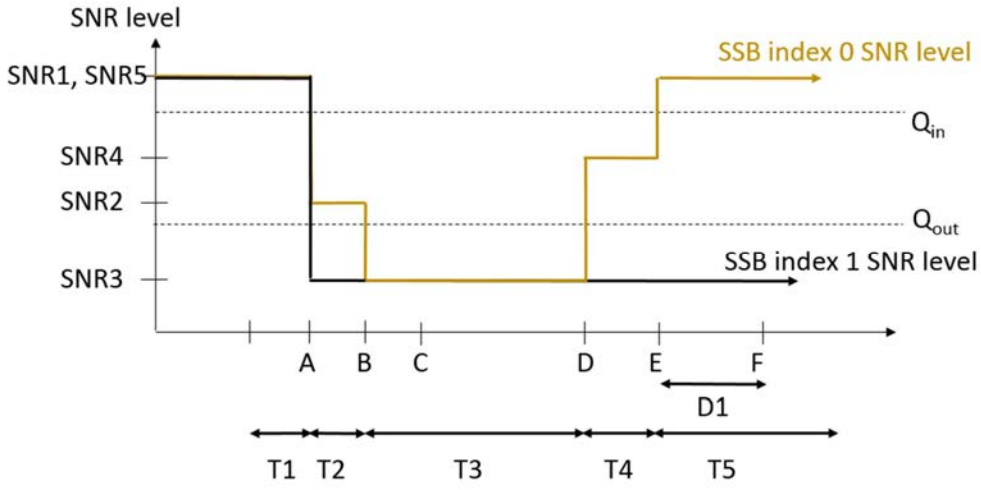

Figure A.17.5.1.2.1-1: SNR variation for in-sync testing

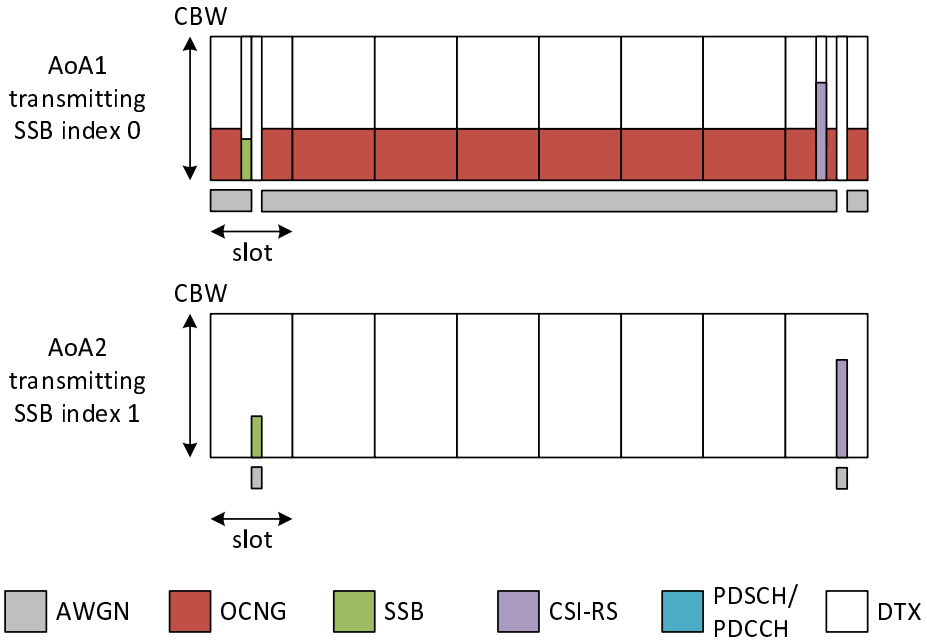

Figure A.17.5.1.2.1-2: Time multiplexed downlink transmissions

A.17.5.1.2.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90%.

A.17.5.1.3 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with SSB-based RLM RS in DRX mode

A.17.5.1.4 Radio Link Monitoring In-sync Test for FR2 PCell configured with SSB-based RLM RS in DRX mode

A.17.5.1.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell when DRX is used. This test will partly verify the FR2 radio link monitoring requirements in clause 8.1B.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to '*rlf*'. Supported test configurations are shown in table A.17.5.1.4.1-1. The test parameters are given in Tables A.17.5.1.4.1-2, and A.17.5.1.4.1-3. There is one cell (Cell 1), which is the active NR cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.17.5.1.4.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The

UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

Table A.17.5.1.4.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	TDD, SSB SCS 120 KHz, data SCS 120KHz, BW 100 MHz

Table A.17.5.1.4.1-2: General test parameters for FR2 in-sync testing in DRX mode

Parameter			Unit	Value
				Test 1
Active PCell				Cell 1
RF Channel Number				1
Duplex mode		Config 1		TDD
$BW_{channel}$		Config 1		100: $N_{RB,c}$ = 66
Data RBs allocated		Config 1		66
DL initial BWP configuration		Config 1		DLBWP.0.1
DL dedicated BWP configuration		Config 1		DLBWP.1.1
UL initial BWP configuration		Config 1		ULBWP.0.1
UL dedicated BWP configuration		Config 1		ULBWP.1.1
TDD Configuration		Config 1		TDDConf.3.1
RMSI CORESET Reference Channel		Config 1		CR.3.1 TDD
Dedicated CORESET Reference Channel		Config 1		CCR.3.1 TDD
SSB Configuration		Config 1		SSB.1 FR2
SMTC Configuration		Config 1		SMTC.3
PDSCH/PDCCH subcarrier spacing		Config 1		120 KHz
PRACH Configuration		Config 1		Table A.3.8.3.4
SSB index assigned as RLM RS		Config 1		0,1
OCNG parameters				OP.1
CP length				Normal
In sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	4
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	0
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
Out of sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	4
	DMRS precoder granularity			REG bundle size

REG bundle size			6
DRX Configuration			DRX.11
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*
T310 timer		ms	4000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1		CSI-RS.3.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
TCI states for PDCCH/PDSCH			TCI.State.2
CSI-RS for tracking	Config 1		TRS.2.1 TDD
T1		s	0.2
T2		s	0.2
T3		s	2.8
T4		s	0.2
T5		s	3.88
D1		s	3.84
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.17.5.1.4.1-3: OTA related cell specific test parameters for FR2 (Cell 1) for in-sync radio link monitoring test in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
AoA setup			Setup 1 defined in A.3.15				
Assumption for UE beams Note 5			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0				
EPRE ratio of PBCH DMRS to SSS		dB	0				
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
ssb-Index 0 SNR	Config 1	dB	$2^{Note 6}$	$-6^{Note 6}$	-15	-4.5	$2^{Note 6}$
ssb-Index 1 SNR	Config 1		$2^{Note 6}$	-15	-15	-15	-15
N_{oc}	Config 1	dBm/15KHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz				
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.3 Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs. Note 4: The SNR values are specified for testing a UE which supports 2RX on at least one band. Note 5: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation. Note 6: This value allows up to 1dB degradation from applied SNR to UE baseband.								

Table A.17.5.1.4.1-4: Void

Table A.17.5.1.4.1-5: Void

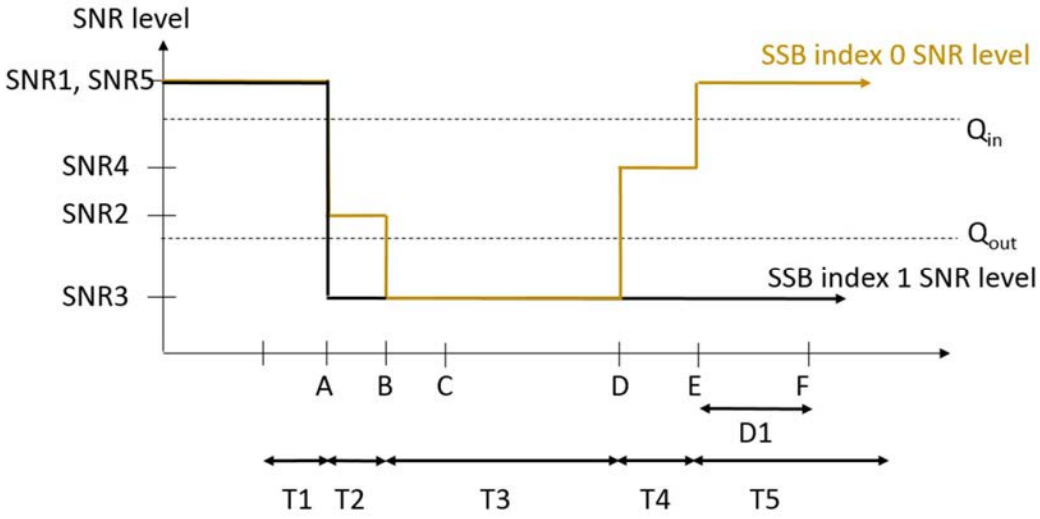

Figure A.17.5.1.4.1-1: SNR variation for in-sync testing

A.17.5.1.4.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90%.

A.17.5.1.5 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with CSI-RS-based RLM in non-DRX mode

A.17.5.1.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when no DRX is used. This test will partly verify the FR2 PCell CSI-RS Out-of-sync radio link monitoring requirements in clause 8.1B.3.

The test parameters are given in Tables A.17.5.1.5.1-1, A.17.5.1.5.1-2, A.17.5.1.5.1-3 and A.17.5.1.5.1-4 below. There is one cell, cell 1 which is the PCell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.17.5.1.5.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 10 ms. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test. In the test, SSB0 and SSB1 are configured as BFD-RS.

Table A.17.5.1.5.1-1: Supported test configurations for FR2 PCell

Configuration	Description

1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Table A.17.5.1.5.1-2: General test parameters for FR2 PCell for CSI-RS out-of-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		TDD
$BW_{channel}$	Config 1		100: $N_{RB,c}$ = 66
Data RBs allocated	Config 1		24
$BW_{occupied}$	Config 1		24
TDD Configuration	Config 1		TDDConf.3.1
DL initial BWP configuration	Config 1		DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.4
UL initial BWP configuration	Config 1		ULBWP.0.1
UL dedicated BWP configuration	Config 1		ULBWP.1.4
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.3.4 TDD CCR.3.6 TDD
SSB Configuration	Config 1		SSB.1 FR2
SMTC Configuration	Config 1		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1		120 KHz
CSI-RS for RLM	Config 1		Resource #4 in TRS.2.1 TDD Resource #4 in TRS.2.2 TDD
TRS configuration			TRS.2.1 TDD TRS.2.2 TDD
TCI configuration for PDCCH#1/PDSCH			TCI.State.2
TCI configuration for PDCCH#2			TCI.State.3
OCNG parameters			OP.5
CP length			Normal
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			OFF
Gap pattern ID			*gp0
Layer 3 filtering			*Enabled*
T310 timer		ms	*0*
T311 timer		ms	1000
N310			1
N311			1

CSI-RS for CSI reporting	Config 1		CSI-RS.3.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
T1		s	0.2
T2		s	0.35
T3		s	0.35
D1		s	0.31
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.17.5.1.5.1-3: Cell specific test parameters for FR2 for CSI-RS out-of-sync radio link monitoring in non-DRX mode

Parameter		Unit	Test 1					
			T1	T2	T3	T1	T2	T3
AoA setup			Setup 3 defined in A.3.15					
			AoA1			AoA2		
Assumption for UE beams Note 10			Rough			Rough		
EPRE ratio of PDCCH DMRS to SSS		dB	4			Not sent		
EPRE ratio of PDCCH to PDCCH DMRS		dB						
EPRE ratio of PBCH DMRS to SSS		dB	0					
EPRE ratio of PBCH to PBCH DMRS		dB						
EPRE ratio of PSS to SSS		dB						
EPRE ratio of PDSCH DMRS to SSS		dB						
EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
SNR on RLM-RS1	Config 1	dB	2 Note 11	-6 Note 11	-15			
SNR on RLM-RS2	Config 1		Not sent			2 Note 11	-14	-15
N_{oc}	Config 1	dBm/ 15kHz	-92.1			-92.1		
Propagation condition			TDL-C 300ns 100Hz			TDL-C 300ns 100Hz		

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.17.5.1.5.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band.
Note 10: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband

Table A.17.5.1.5.1-4: Measurement gap configuration for FR2 CSI-RS out-of-sync radio link monitoring in non-DRX mode

Field	Test 1
	Value
gapOffset	0

Note 1:	RLM RS is partially overlapped with measurement gap

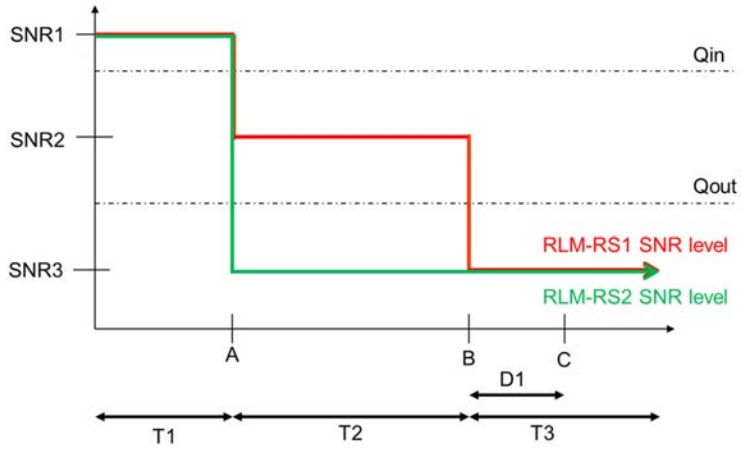

Figure A.17.5.1.5.1-1: SNR variation for CSI-RS out-of-sync testing

A.17.5.1.5.2 Test Requirements

The UE behaviour during time durations T1, T2, and T3 shall be as follows:

During time durations T1, T2 and T3, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

The UE shall stop transmitting uplink signal in Cell 1 no later than time point C (D_1 second after the start of the time duration T3) on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.17.5.1.6 Radio Link Monitoring In-sync Test for FR2 PCell configured with CSI-RS-based RLM in non-DRX mode

A.17.5.1.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when no DRX is used. This test will partly verify the FR2 PCell CSI-RS In-sync radio link monitoring requirements in clause 8.1B.3.

The test parameters are given in Tables A.17.5.1.6.1-1, A.17.5.1.6.1-2 and A.17.5.1.6.1-3 below. There is one cells, cell 1which is the PCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.17.5.1.6.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 10 ms. In the test, DRX configuration is not enabled. In the test, SSB0 and SSB1 are configured as BFD-RS.

Table A.17.5.1.6.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Table A.17.5.1.6.1-2: General test parameters for FR2 PCell for CSI-RS in-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		TDD
$BW_{channel}$	Config 1		100: $N_{RB,c}$ = 66
Data RBs allocated	Config 1		24
$BW_{occupied}$	Config 1		24
TDD Configuration	Config 1		TDDConf.3.1
DL initial BWP configuration	Config 1		DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.4
UL initial BWP configuration	Config 1		ULBWP.0.1
UL dedicated BWP configuration	Config 1		ULBWP.1.4
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.3.1 TDD CCR.3.3 TDD
SSB Configuration	Config 1		SSB.1 FR2
SMTC Configuration	Config 1		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1		120 KHz
CSI-RS for RLM	Config 1		Resource #4 in TRS.2.1 TDD Resource #4 in TRS.2.2 TDD
TRS configuration			TRS.2.1 TDD TRS.2.2 TDD
TCI configuration for PDCCH#1/PDSCH			TCI.State.2
TCI configuration for PDCCH#2			TCI.State.3
OCNG parameters			OP.5
CP length			Normal
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4

	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			OFF
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*
T310 timer		ms	1000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1		CSI-RS.3.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
T1		s	0.2
T2		s	0.2
T3		s	0.24
T4		s	0.2
T5		s	0.88
D1		s	0.84
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.17.5.1.6.1-3: Cell specific test parameters for FR2 for CSI-RS in-sync radio link monitoring in non-DRX mode

Parameter		Unit	Test 1									
			T1	T2	T3	T4	T5	T1	T2	T3	T4	T5
AoA setup			Setup 3 defined in A.3.15									
			AoA1					AoA2				
Assumption for UE beams Note 10			Rough					Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	4					Not sent				
EPRE ratio of PDCCH to PDCCH DMRS		dB										
EPRE ratio of PBCH DMRS to SSS		dB	0									
EPRE ratio of PBCH to PBCH DMRS		dB										
EPRE ratio of PSS to SSS		dB										
EPRE ratio of PDSCH DMRS to SSS		dB										
EPRE ratio of PDSCH to PDSCH DMRS		dB										
EPRE ratio of OCNG DMRS to SSS		dB										
EPRE ratio of OCNG to OCNG DMRS		dB										
SNR on RLM-RS1	Config 1	dB	2 Note 11	-6 Note 11	-15	-4.5	2 Note 11					
SNR on RLM-RS2	Config 1		Not sent					2 Note 11	-14	-15	-15	-14
N_{oc}	Config 1	dBm/ 15KHz	-92.1					-92.1				
Propagation condition			TDL-C 300ns 100Hz					TDL-C 300ns 100Hz				

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure A.17.5.1.6.1-1.
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band.
Note 10:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 11:	This value allows up to 1dB degradation from applied SNR to UE baseband.

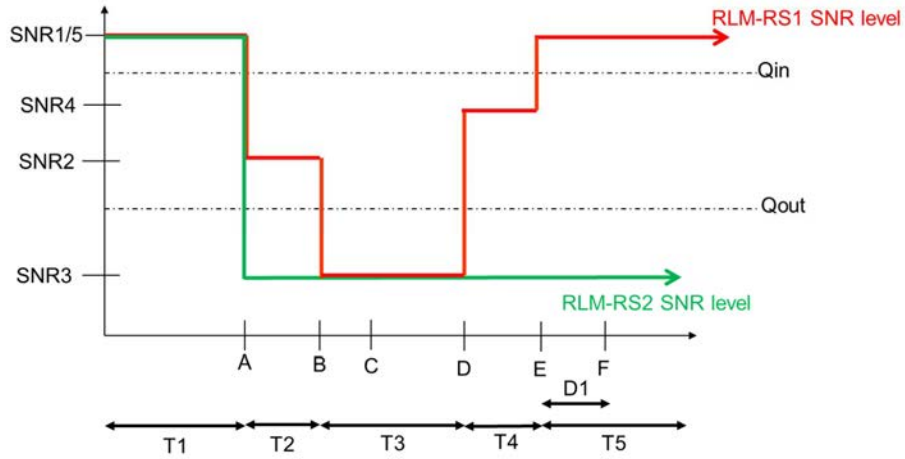

Figure A.17.5.1.6.1-1: SNR variation for CSI-RS in-sync testing

A.17.5.1.6.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.17.5.1.7 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with CSI-RS-based RLM in DRX mode

A.17.5.1.7.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when DRX is used. This test will partly verify the FR2 PCell CSI-RS Out-of-sync radio link monitoring requirements in clause 8.1B.3.

The test parameters are given in Tables A.17.5.1.7.1-1, A.17.5.1.7.1-2, and A.17.5.1.7.1-3 below. There is one cell, cell 1 is the PCell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.17.5.1.7.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be

configured for periodic CSI reporting with a reporting periodicity of 10 ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test. In the test, SSB0 and SSB1 are configured as BFD-RS.

Table A.17.5.1.7.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Table A.17.5.1.7.1-2: General test parameters for FR2 PCell for CSI-RS out-of-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		TDD
TDD Configuration	Config 1		TDDConf.3.1
DL initial BWP configuration	Config 1		DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.1
UL initial BWP configuration	Config 1		ULBWP.0.1
UL dedicated BWP configuration	Config 1		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.3.4 TDD CCR.3.6 TDD
SSB Configuration	Config 1		SSB.1 FR2
SMTC Configuration	Config 1		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1		120 KHz
CSI-RS for RLM	Config 1		Resource #4 in TRS.2.1 TDD Resource #4 in TRS.2.2 TDD
TRS configuration			TRS.2.1 TDD TRS.2.2 TDD
TCI configuration for PDCCH#1/PDSCH			TCI.State.2
TCI configuration for PDCCH#2			TCI.State.3
OCNG parameters			OP.1
CP length			Normal
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			DRX.3
Gap pattern ID			N.A.

Layer 3 filtering			*Enabled*
T310 timer		ms	*0*
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1		CSI-RS.3.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
T1		s	0.2
T2		s	1.28
T3		s	1.28
D1		s	1.24
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.17.5.1.7.1-3: Cell specific test parameters for FR2 for CSI-RS out-of-sync radio link monitoring in DRX mode

Parameter		Unit	Test 1		
			T1	T2	T3
AoA setup		dB	Setup 1 defined in A.3.15		
Assumption for UE beams Note 10			Rough		
EPRE ratio of PDCCH DMRS to SSS		dB	4		
EPRE ratio of PDCCH to PDCCH DMRS		dB			
EPRE ratio of PBCH DMRS to SSS		dB	0		
EPRE ratio of PBCH to PBCH DMRS		dB			
EPRE ratio of PSS to SSS		dB			
EPRE ratio of PDSCH DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS1	Config 1	dB	2 Note 11	-6 Note 11	-15
SNR on RLM-RS2	Config 1	dB	2 Note 11	-14	-15
N_{oc}	Config 1	dBm/15KHz	-104.7		
Propagation condition			TDL-C 300ns 100Hz		

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8:	The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.17.5.1.7.1-1.
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band.
Note 10:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 11:	This value allows up to 1dB degradation from applied SNR to UE baseband.

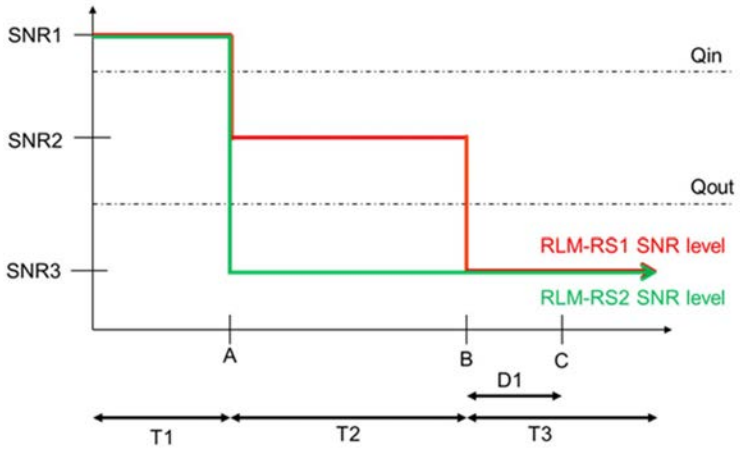

Figure A.17.5.1.7.1-1: SNR variation for CSI-RS out-of-sync testing

A.17.5.1.7.2 Test Requirements

The UE behaviour during time durations T1, T2, and T3 shall be as follows:

During time durations T1, T2 and T3, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on PCell.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 (PCell) at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

The UE shall stop transmitting uplink signal in Cell 1 (PCell) no later than time point C (D_1 secondafter the start of the time duration T3) on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.17.5.1.8 Radio Link Monitoring In-sync Test for FR2 PCell configured with CSI-RS-based RLM in DRX mode

A.17.5.1.8.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when DRX is used. This test will partly verify the FR2 PCell CSI-RS In-sync radio link monitoring requirements in clause 8.1B.

The test parameters are given in Tables A.17.5.1.8.1-1, A.17.5.1.8.1-2, A.17.5.1.8.1-3 and A.17.5.1.8.1-4 below. There is one cells, cell 1which is the PCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.17.5.1.8.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 10 ms. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test. In the test, SSB0 and SSB1 are configured as BFD-RS.

Table A.17.5.1.8.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Table A.17.5.1.8.1-2: General test parameters for FR2 PCell for CSI-RS in-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		TDD
TDD Configuration	Config 1		TDDConf.3.1
DL initial BWP configuration	Config 1		DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.1
UL initial BWP configuration	Config 1		ULBWP.0.1
UL dedicated BWP configuration	Config 1		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.3.1 TDD CCR.3.3 TDD
SSB Configuration	Config 1		SSB.1 FR2
SMTC Configuration	Config 1		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1		120 KHz
CSI-RS for RLM	Config 1		Resource #4 in TRS.2.1 TDD Resource #4 in TRS.2.2 TDD
TRS configuration			TRS.2.1 TDD TRS.2.2 TDD
TCI configuration for PDCCH#1/PDSCH			TCI.State.2
TCI configuration for PDCCH#2			TCI.State.3
OCNG parameters			OP.1
CP length			Normal
	DCI format		1-0

Out of sync transmission parameters	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			DRX.3
Gap pattern ID			*gp0
Layer 3 filtering			*Enabled*
T310 timer		ms	*2000*
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1		CSI-RS.3.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
T1		s	0.2
T2		s	0.2
T3		s	1.64
T4		s	0.2
T5		s	1.88
D1		s	1.84
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.17.5.1.8.1-3: Cell specific test parameters for FR2 for CSI-RS in-sync radio link monitoring in non-DRX mode

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
AoA setup	dB	Setup 1 defined in A.3.15				
Assumption for UE beams Note 10		Rough				
EPRE ratio of PDCCH DMRS to SSS	dB	4				
EPRE ratio of PDCCH to PDCCH DMRS	dB					
EPRE ratio of PBCH DMRS to SSS	dB	0				
EPRE ratio of PBCH to PBCH DMRS	dB					

EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS							
EPRE ratio of OCNG DMRS to SSS							
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS1	Config 1	dB	2 Note 11	-6 Note 11	-15	-4.5	2 Note 11
SNR on RLM-RS2	Config 1	dB	2 Note 11	-14	-15	-15	-14
N_{oc}	Config 1	dBm/15KHz	-104.7				
Propagation condition			TDL-C 300ns 100Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure A.17.5.1.8.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band..
Note 10: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband.

Table A.17.5.1.8.1-4: Measurement gap configuration for FR2 CSI-RS in-sync radio link monitoring in non-DRX mode

Field	Test 1
	Value
gapOffset	0
Note 1: RLM RS is partially overlapped with measurement gap	

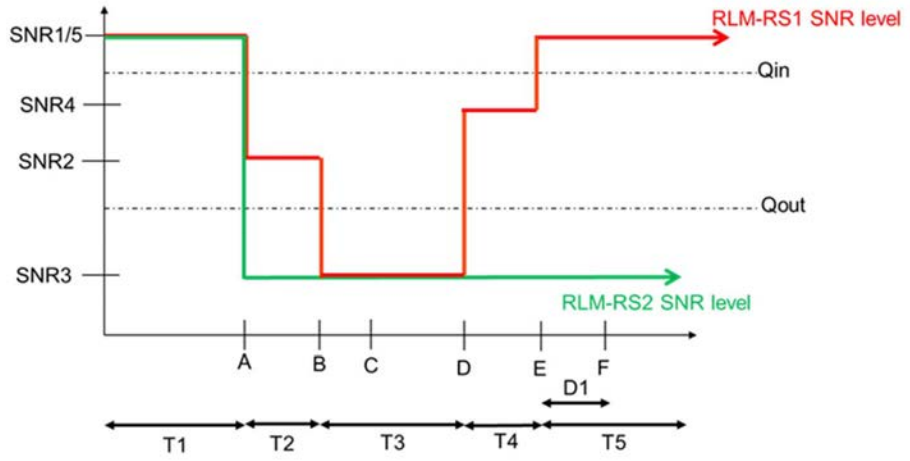

Figure A.17.5.1.8.1-1: SNR variation for CSI-RS in-sync testing

A.17.5.1.8.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.17.5.1.9 UE Radio Link Monitoring Scheduling Restrictions on FR2

A.17.5.1.9.1 Test Purpose and Environment

The purpose is to verify that the NR UE correctly follows the RLM scheduling restrictions requirements defined in clause 8.1B.7. This test verifies that the UE correctly receive the PDCCH scheduled on the symbols right before the RLM SSB symbols without overlap so that it sends ACK/NACK correctly. The test case is only applicable to UE which supports pdcch-MonitoringAnyOccasions or pdcch-MonitoringAnyOccasionsWithSpanGap.

The test parameters are given in table A.17.5.1.9.1-1, table A.17.5.1.9.1-2 and table A.17.5.1.9.1-3 below. The UE is required during time period T1 to transmit ACK/NACK correctly upon scheduling of PDSCH.

Table A.17.5.1.9.1-1: Supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 120 kHz RMC SCS, 100 MHz bandwidth, TDD duplex mode

Table A.17.5.1.9.1-2: General test parameters for NR RLM scheduling restriction test case in FR2

Parameter	Unit	Test configuration	Value	Comment
RF Channel Number		1	1	
SSB configuration		1	SSB.1 FR2	
SMTC configuration		1	SMTC pattern 1	

DRX cycle length	s	1	OFF	
T1	s	1	5	During T1 the UE is required to correctly transmit ACK/NACK

Table A.17.5.1.9.1-3: Cell specific test parameters for NR RLM scheduling restriction test case in FR2

Parameter	Unit	Test configuration	Cell 1	
AoA setup		1	Setup 3 defined in A.3.15.3	
			AoA1	AoA2
Assumption for UE beams Note 1			Rough	Rough
TDD configuration		1	TDDConf.3.1	
$BW_{channel}$	MHz	1	100: $N_{RB,c}$ = 66	
Data RBs allocated		1	24	
PDSCH Reference measurement channel		1	SR.3.2 TDD	Not sent
RMSI CORESET RMC configuration		1	CR.3.1 TDD	Not sent
Dedicated CORESET RMC configuration		1	CCR.3.2 TDD	Not sent
TRS configuration		1	TRS.2.1 TDD	TRS.2.2 TDD
PDCCH/PDSCH TCI state		1	TCI.State.2	N/A
OCNG Pattern		1	OP.5 defined in A.3.2.1	Not sent
Initial DL BWP configuration		1	DLBWP.0.1	
Initial UL BWP configuration		1	ULBWP.0.1	
RLM-RS		1	SSB with index 0	SSB with index 1
N_{oc}	dBm/15kHz	1	-92.1	-92.1
N_{oc} Note2	dBm/SCS	1	-83.1	-83.1
$\hat{E}_s / N_{oc}$	dB	1	2	2
$\hat{E}_s / I_{ot}$ BB Note 4	dB	1	1	1
SSB_RP Note3	dBm/SCS	1	-81.1	-81.1
Io	dBm/95.04 MHz	1	-54.35	-54.35
Time multiplexing of the downlink transmissions from each AoA		1	Defined in Figure A.17.5.1.9.1-1	
Propagation Condition		1	AWGN	AWGN

Note 1: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.

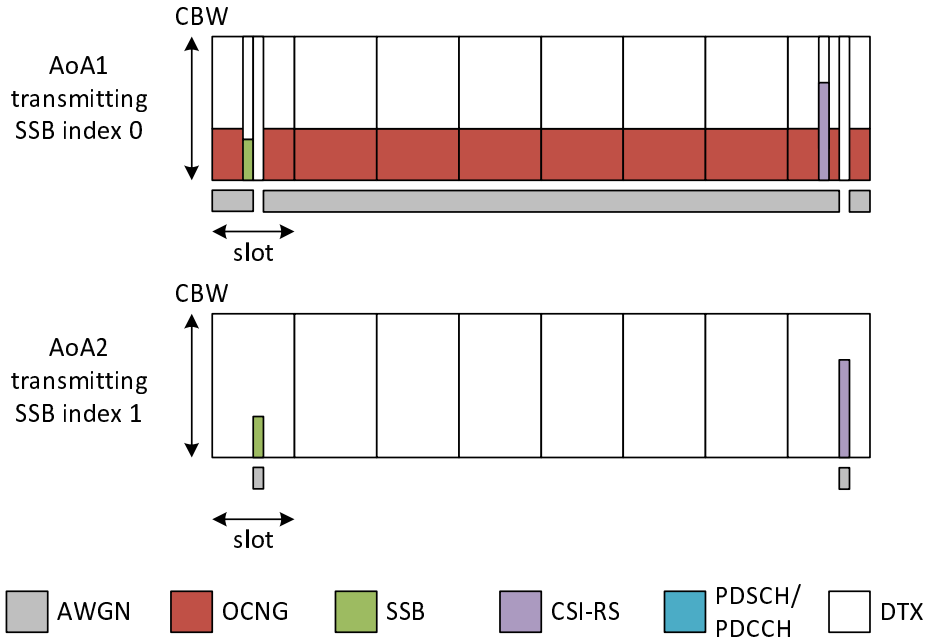

Figure A.17.5.1.9.1-1: Time multiplexed downlink transmissions

A.17.5.1.9.2 Test Requirements

The UE behaviour follows the requirements defined in clause 8.1B.7.3.

A.17.5.2 Beam Failure Detection and Link recovery procedures

A.17.5.2.1 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with SSB-based BFD and LR in non-DRX mode

A.17.5.2.2 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with SSB-based BFD and LR in DRX mode

A.17.5.2.3 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with CSI-RS-based BFD and LR in non-DRX mode

A.17.5.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct CSI-RS-based link recovery based on beam candicate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR2 serving cell requirements in clause 8.5B.

The test parameters are given in Tables A.17.5.2.3.1-1, A.17.5.2.3.1-2, and A.17.5.2.3.1-3 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.17.5.2.3.1-1 shows the variation of the downlink SNR of the CSI-RS in set q_0 in the active cell to emulate CSI-RS based beam failure. Figure A.17.5.2.3.1-1 additionally shows the variation of

the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled.

Table A.17.5.2.3.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Table A.17.5.2.3.1-2: General test parameters for FR2 PCell for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Test Config.	Unit	Value	Comment
				Test 1	
Active PCell		1		Cell 1	
RF Channel Number		1		1	
Duplex mode		1		TDD	
TDD Configuration		1		TDDConf.3.1	
$BW_{channel}$		1		100: $N_{RB,c}$ = 66	
Data RBs allocated		1		66	
PDSCH/PDCCH subcarrier spacing		1	kHz	120	
DL initial BWP configuration		1		DLBWP.0.1	
DL dedicated BWP configuration		1		DLBWP.1.1	
UL initial BWP configuration		1		ULBWP.0.1	
UL dedicated BWP configuration		1		ULBWP.1.1	
PDSCH Reference Channel		1		SR.3.2 TDD	
RMSI CORESET Reference Channel		1		CR.3.1 TDD	
Dedicated CORESET Reference Channel		1		CCR.3.1 TDD	
OCNG parameters		1		OP.1	
CP length		1		Normal	
PDSCH/PDCCH TCI state		1		TCI.State.0	
CSI-RS for tracking		1		TRS.2.1 TDD	
SSB Configuration		1		SSB.1 FR2	
SMTC Configuration		1		SMTC.3	
PRACH Configuration		1		FR2 PRACH configuration 4	A.3.8.3.4
DRX configuration		1		OFF	
CSI-RS configuration for BFD/CBD/RLM		1		CSI-RS.3.2 TDD	A.3.14.2
CSI-RS index assigned as BFD RS (q_0)		1		0	
CSI-RS index assigned as CBD RS (q_1)		1		1	
CSI-RS index assigned as RLM RS		1		0,1	
Beam failure detection transmission parameters	DCI format	1		1-0	
	Number of Control OFDM symbols	1		2	
	Aggregation level	1	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1	dB	0	
	DMRS precoder granularity	1		REG bundle size	
	REG bundle size	1		6	
Gap pattern ID		1		N/A	

rlmInSyncOutOfSyncThreshold	1		absent	Value 0 is applied. (Table 8.1.1-1).
rsrp-ThresholdSSB	1	dBm/SCS	-95	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS	1		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount	1		n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer	1		pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting	1		CSI-RS.3.1 TDD	A.3.14.2
reportConfigType	1		periodic	
reportQuantity	1		cri-RI-PMI-CQI	
CSI reporting periodicity	1	slot	40	
CSI reporting offset	1	slot	4	
T310	1	ms	1000	
N310	1		2	
T1	1	s	1	The UE shall be fully synchronized to cell 1 during T1
T2	1	s	1.17	
T3	1	s	0.9	
T4	1	s	0	
T5	1	s	0.31	
D1	1	s	0.27	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.17.5.2.3.1-3: Cell specific test parameters for FR2 PCell for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
AoA setup			Setup 1 defined in A.3.15				
Assumptpion for UE beams Note 10			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set q_0	Config 1	dB	5 Note 11	-3 Note 11	-12	-12	-12
SNR_CSI-RS of set q_1	Config 1	dB	0.2	0.2	20.2	20.2	20.2
CSI-RS_RP of set q_1	Config 1	dBm/SCS	-104.5	-104.5	-84.5	-84.5	-84.5
N_{oc}	Config 1	dBm/120 KHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz				

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	Void
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.7.5.5.3.1-1.
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band.
Note 10:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 11:	This value allows up to 1dB degradation from applied SNR to UE baseband

Table A.17.5.2.3.1-4: Void

Table A.17.5.2.3.1-5: Void

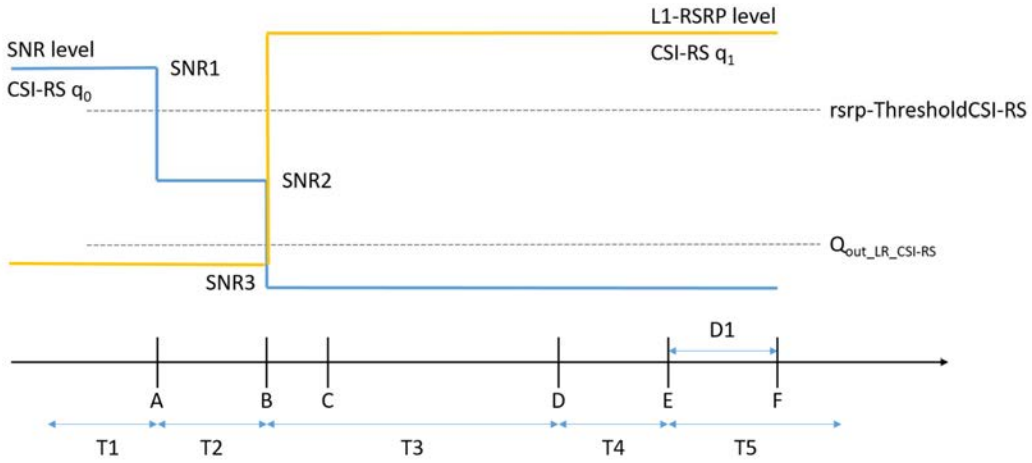

Figure A.17.5.2.3.1-1: SNR and L1-RSRP variation for CSI-RS based beam failure detection and link recovery testing in non-DRX mode

A.17.5.2.3.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the shall detect beam failure and initiat link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 260+10 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.17.5.2.4 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with CSI-RS-based BFD and LR in DRX mode

A.17.5.2.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct CSI-RS-based link recovery based on beam candicate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR2 serving cell requirements in clause 8.5B.

The test parameters are given in Tables A.17.5.2.4.1-1, A.17.5.2.4.1-2, A.17.5.2.4.1-3, and A.17.5.2.4.1-4 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.17.5.2.4.1-1 shows the variation of the downlink SNR of the CSI-RS in set q_0 in the active cell to emulate CSI-RS based beam failure. Figure A.17.5.2.4.1-1 additionally shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.17.5.2.4.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Table A.17.5.2.4.1-2: General test parameters for FR2 PCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

Parameter	Test Config.	Unit	Value	Comment
			Test 1	
Active PCell	1		Cell 1	
RF Channel Number	1		1	
Duplex mode	1		TDD	
TDD Configuration	1		TDDConf.3.1	
$BW_{channel}$	1		100: $N_{RB,c}$ = 66	
Data RBs allocated	1		66	
PDSCH/PDCCH subcarrier spacing	1	kHz	120	
DL initial BWP configuration	1		DLBWP.0.1	
DL dedicated BWP configuration	1		DLBWP.1.1	
UL initial BWP configuration	1		ULBWP.0.1	
UL dedicated BWP configuration	1		ULBWP.1.1	
PDSCH Reference Channel	1		SR.3.2 TDD	
RMSI CORESET Reference Channel	1		CR.3.1 TDD	
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD	
OCNG parameters	1		OP.1	
CP length	1		Normal	
PDSCH/PDCCH TCI state	1		TCI.State.0	
CSI-RS for tracking	1		TRS.2.1 TDD	
SSB Configuration	1		SSB.1 FR2	

SMTC Configuration		1		SMTC.3	
PRACH Configuration		1		FR2 PRACH configuration 4	A.3.8.3.4
DRX configuration		1		DRX.3	A.3.3.3
CSI-RS configuration for BFD/CBD/RLM		1		CSI-RS.3.2 TDD	A.3.14.2
CSI-RS index assigned as BFD RS (q_0)		1		0	
CSI-RS index assigned as CBD RS (q_1)		1		1	
CSI-RS index assigned as RLM RS		1		0,1	
Beam failure detection transmission parameters	DCI format	1		1-0	
	Number of Control OFDM symbols	1		2	
	Aggregation level	1	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1	dB	0	
	DMRS precoder granularity	1		REG bundle size	
	REG bundle size	1		6	
Gap pattern ID		1		N/A	
rlmInSyncOutOfSyncThreshold		1		absent	Value 0 is applied. (Table 8.1.1-1).
rsrp-ThresholdSSB		1	dBm/SCS	-95	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS		1		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount		1		n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer		1		pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting		1		CSI-RS.3.1 TDD	A.3.14.2
reportConfigType		1		periodic	
reportQuantity		1		cri-RI-PMI-CQI	
CSI reporting periodicity		1	slot	40	
CSI reporting offset		1	slot	4	
T310		1	ms	1000	
N310		1		2	
T1		1	s	1	The UE shall be fully synchronized to cell 1 during T1
T2		1	s	5.43	
T3		1	s	5.16	
T4		1	s	0	
T5		1	s	0.31	
D1		1	s	0.27	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.					

Table A.17.5.2.4.1-3: Cell specific test parameters for FR2 PCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
AoA setup		Setup 1 defined in A.3.15				

Assumption for UE beams Note 10			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set q_0	Config 1	dB	5 Note 11	-3 Note 11	-12	-12	-12
SNR_CSI-RS of set q_1	Config 1	dB	0.2	0.2	20.2	20.2	20.2
CSI-RS_RP of set q_1	Config 1	dBm/SCS	-104.5	-104.5	-84.5	-84.5	-84.5
N_{oc}	Config 1	dBm/120 KHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Void
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.7.5.5.4.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band.
Note 10: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband

Table A.17.5.2.4.1-4: Void

Table A.17.5.2.4.1-5: Void

Table A.17.5.2.4.1-6: Void

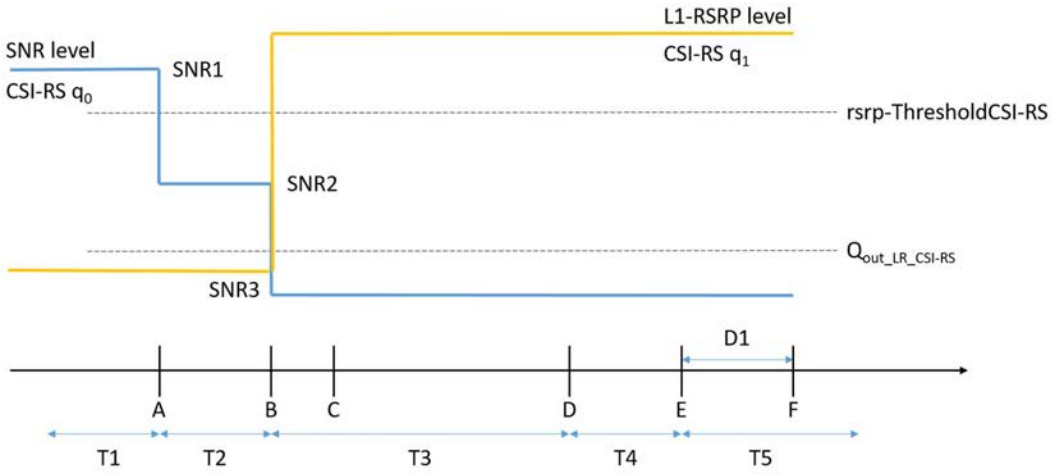

Figure A.17.5.2.4.1-1: SNR and L1-RSRP variation for CSI-RS-based beam failure detection and link recovery testing in DRX mode

A.17.5.2.4.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiat link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 260+10 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.17.5.2.5 Scheduling availability restriction during Beam Failure Detection and Link Recovery for FR2 PCell configured with SSB-based BFD and LR in non-DRX mode for 2 Rx UE

A.17.5.2.5.1 Test Purpose and Environment

The purpose is to test scheduling availability restrictions when the UE is performing beam failure detection or when the UE is performing L1-RSRP measurement for candidate beam detection, when no DRX is used. This test will verify the scheduling availability restriction requirements in clause 8.5B.7 and 8.5B.8.

The test parameters are given in Tables A.17.5.2.5.1-1, A.17.5.2.5.1-2 and A.17.5.2.5.1-3 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.17.5.2.5.1-1 shows the variation of the downlink SNR of the SSB in set q_0 in the active cell to emulate SSB based beam failure. Figure A.17.5.2.5.1-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. This test will focus on the scheduling availability during beam failure detection) and candidate beam detection. In the test, DRX configuration is not enabled. Test is to test the scheduling availability restriction of UE performing beam failure detection and candidate beam detection when SSB RS configured for Beam failure detection and candidate beam detection. During the test the UE is scheduled to transmit continuously in UL.

Table A.17.5.2.5.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.17.5.2.5.1-2: General test parameters for FR2 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter	Test Config.	Unit	Value	Comment
			Test 1	
Active PCell	1-2		Cell 1	
RF Channel Number	1-2		1	
Duplex mode	1-2		TDD	
TDD Configuration	1-2		TDDConf.3.1	
$BW_{channel}$	1-2		100: $N_{RB,c}$ = 66	
Data RBs allocated	1-2		66	
PDSCH/PDCCH subcarrier spacing	1-2	kHz	120	
DL initial BWP configuration	1-2		DLBWP.0.1	
DL dedicated BWP configuration	1-2		DLBWP.1.1	
UL initial BWP configuration	1-2		ULBWP.0.1	
UL dedicated BWP configuration	1-2		ULBWP.1.1	
PDSCH Reference Channel	1		SR.3.2 TDD	
	2		SR.3.3 TDD	
RMSI CORESET Reference Channel	1		CR.3.1 TDD	
	2		CR.3.2 TDD	
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD	
	2		CCR.3.7 TDD	
OCNG parameters	1-2		OP.1	
CP length	1-2		Normal	
PDSCH/PDCCH TCI state	1-2		TCI.State.0	
CSI-RS for tracking	1-2		TRS.2.1 TDD	
SSB Configuration	1		SSB.1 FR2	
	2		SSB.2 FR2	
SMTC Configuration	1-2		SMTC.1	
PRACH Configuration	1-2		FR2 PRACH configuration 2	A.3.8.3.2
DRX configuration	1-2		OFF	
SSB index assigned as BFD RS (q_0)	1-2		0	
SSB index assigned as CBD RS (q_1)	1-2		1	
DCI format	1-2		1-0	

Beam failure detection transmission parameters	Number of Control OFDM symbols	1-2		2	
	Aggregation level	1-2	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1-2	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1-2	dB	0	
	DMRS precoder granularity	1-2		REG bundle size	
	REG bundle size	1-2		6	
Gap pattern ID		1-2		N/A	
rlmInSyncOutOfSyncThreshold		1-2		absent	Value 0 is applied. (Table 8.1.1-1).
rsrp-ThresholdSSB		1	dBm/SCS	-95	Threshold used for $Q_{in_LR_SSB}$
		2		-92	
powerControlOffsetSS		1-2		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount		1-2		n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer		1-2		pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting		1-2		CSI-RS.3.1 TDD	
reportConfigType		1-2		periodic	
reportQuantity		1-2		cri-RI-PMI-CQI	
CSI reporting periodicity		1-2	slot	40	
CSI reporting offset		1-2	slot	4	
T310		1-2	ms	1000	
N310		1-2		2	
T1		1-2	s	1	The UE shall be fully synchronized to cell 1 during T1
T2		1-2	s	2.6	
T3		1-2	s	1.64	
T4		1-2	s	0	
T5		1-2	s	1.01	
D1		1-2	s	0.97	
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.					

Table A.17.5.2.5.1-3: Cell specific test parameters for FR2 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
AoA Setup		Setup1 defined in A.3.15.1				
Assumption for UE beams Note 10		Rough				
EPRE ratio of PDCCH DMRS to SSS	dB	0				

EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q_0	Config 1-2	dB	5 Note 11	-3 Note 11	-12	-12	-12
SNR_SSB of set q_1	Config 1-2	dB	0.2	0.2	20.2	20.2	20.2
SSB_RP of set q_1	Config 1	dBm/SCS	-104.5	-104.5	-84.5	-84.5	-84.5
	Config 2		-101.5	-101.5	-81.5	-81.5	-81.5
N_{oc}	Config 1-2	dBm/120 kHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Void
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.17.5.2.5.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band.
Note 10: Information about types of UE beam given in B.2.1.3 and does not limit UE implementation or test system implementation
Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband.

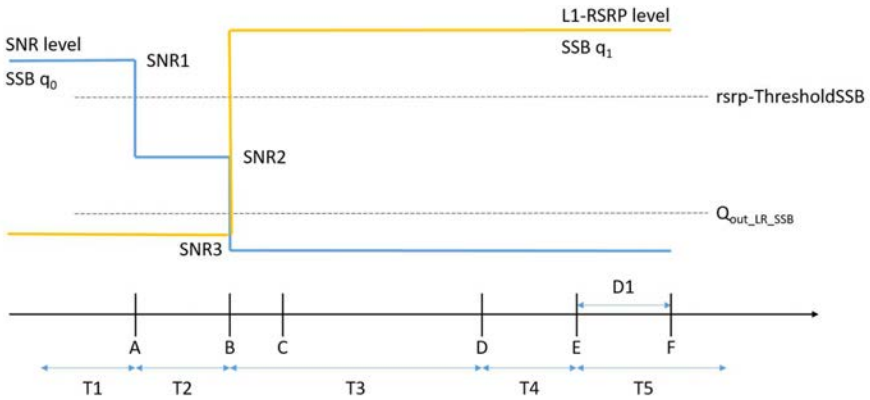

Figure A.17.5.2.5.1-1: SNR and L1-RSRP variation SSB for SSB-based beam failure detection and link recovery testing in non-DRX mode

A.17.5.2.5.2 Test Requirements

The UE behaviour during time duration T3 follows the requirements defined in clause 8.5B.7.3:

- The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on BFD-RS symbols to be measured for beam failure detection.

The UE behaviour during time durations T4 and T5 follows the requirements defined in clause 8.5B.8.3:

- The UE is not expected to transmit PUCCH/PUSCH or receive PDCCH/PDSCH on reference symbols to be measured for candidate beam detection.

A.17.5.3 Active BWP switch for RedCap

A.17.5.3.1 DCI-based and Timer-based Active BWP Switch

A.17.5.3.1.1 NR FR2 DL active BWP switch with non-DRX in SA

A.17.5.3.1.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement defined in clause 8.6A. Supported test configurations are shown in Table A.17.5.3.1.1.1-1.

The test scenario comprises of one cell (Cell 1) as given in Table A.17.5.3.1.1.1-2. Cell-specific parameters of NR PCell is specified in Table A.17.5.3.1.1.1-3 below. The OTA related test parameters for FR2 is shown in Table A.17.5.3.1.1.1-4.

PDCCHs indicating new transmissions shall be sent continuously on Cell 1 to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 on radio channel 1.
- UE is configured with 2 different UE-specific downlink bandwidth parts, BWP-1 and BWP-2 before starting the test. BWP-1 include bandwidth of the initial DL BWP and SSB.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1.
- UE is configured with a *bwp-InactivityTimer* timer value for Cell1.

All cells have constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

> Time period T1 starts when a DCI format 1_1 command for DL BWP switch, sent from the test equipment to the UE, is received at the UE side in Cell 1's slot # denoted *i*. The UE should switch its bandwidth part from BWP-1 to BWP-2.
>
> The UE shall be able to receive PDSCH on the first DL slot that occurs after the beginning of Cell 1's DL slot ($i+T_{BWPswitchDelay}$) as defined in clause 8.6A and starts to report valid ACK/NACK for the Cell 1 no later than the first UL slot that occurs after the beginning of slot ($i+T_{BWPswitchDelay}+k1$). The UE shall be continuously scheduled on Cell 1's BWP-2 starting from the first DL slot that occurs after the beginning of slot ($i+T_{BWPswitchDelay}$).

During T2, the test equipment won't transmit DCI format for PDSCH reception on Cell 1.

During T3,

The time period T3 starts from the slot #*j*, where j is the first slot of the half subframe immediately after *bwp-InactivityTimer* timer expires. The UE should switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1.

The UE shall be able to receive PDSCH on the first DL slot that occurs after the beginning of Cell 1's DL slot ($j+T_{BWPswitchDelay}$) as defined in clause 8.6A and starts to report valid ACK/NACK for the Cell 1 at latest on the first UL slot that occurs after the beginning of slot ($j+T_{BWPswitchDelay}+k1$). The UE shall be continuously scheduled on Cell 1's BWP-1 starting from the first DL slot that occurs after the beginning of slot ($j+T_{BWPswitchDelay}$).

The test equipment verifies the DL BWP switch time by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK is received.

Table A.17.5.3.1.1.1-1: DL BWP switch supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.17.5.3.1.1.1-2: General test parameters for DL BWP switch in SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active Cell		Cell 1	Cell on RF channel number 1.
CP length		Normal	
DRX		OFF	
bwp-InactivityTimer	ms	[200]	
T1	s	[0.2]	
T2	s	[0.2]	
T3	s	[0.2]	

Table A.17.5.3.1.1.1-3: NR Cell specific test parameters for DL BWP switch in SA

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
$BW_{channel}$		100 MHz: $N_{RB,c}$ = 66
Active BWP ID		1, 2
Initial DL BWP Configuration		DLBWP.0.2 Note 2
Active DL BWP-1 Configuration		DLBWP.1.1 Note 2
Active DL BWP-2 Configuration		DLBWP.1.2 REDCAP Note 2
Initial UL BWP Configuration		ULBWP.0.2 Note 2
Active UL BWP-1 Configuration		ULBWP.1.1 Note 2
Active UL BWP-2 Configuration		DLBWP.1.2 REDCAP Note 2
PDSCH Reference measurement channel		SR.3.1 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP.1
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
TCI State		TCI.State.0
TRS Configuration		TRS.2.1 TDD
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0

EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		AWGN
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 2: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.2 REDCAP is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].		

Table A.17.5.3.1.1.1-4: OTA related test parameters for DL BWP switch in SA

Parameter	Unit	Cell 2
Angle of arrival configuration		Setup 1 defined in clause A.3.15.1
Assumption for UE beams Note 6		Fine
N_{oc} Note 1	dBm/15 kHz	-112
N_{oc} Note 1	dBm/SCS	-103
SS-RSRP Note 2	dBm/120 kHz Note3	-85
$\hat{E}_s/I_{ot}$	dB	18
$\hat{E}_s/N_{oc}$ Note 5	dB	18
Io Note2	dBm/95.04 MHz Note4	-56
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.		
Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.		
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.		
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone		
Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone.		
Note 6: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.		

A.17.5.3.1.1.2 Test Requirements

During T1, the UE shall start to send the ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot ($i+T_{BWPswitchDelay}+k1$).

During T3, the UE shall start to send the ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot ($j+T_{BWPswitchDelay}+k1$).

Where, *k1* is the timing between DL data receiving and acknowledgement as specified in [7].

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 8.6A.2-1.

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK/NACK in the first UL slot that occurs after the beginning of DL slot ($i+ T_{BWPswitchDelay}+k1$), ($j+ T_{BWPswitchDelay}+k1$), then the UE shall use the next available uplink resource for reporting the corresponding ACK/NACK.

A.17.5.3.2 RRC-based Active BWP Switch

A.17.5.3.2.1 NR FR2 DL active BWP switch of PCell with non-DRX in SA

A.17.5.3.2.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement for RRC-based BWP switch defined in clause 8.6A.3. Supported test configurations are shown in Table A.17.5.3.2.1.1-1.

The test scenario comprises of one Cell (Cell 1) as given in Table A.17.5.3.2.1.1-2. Cell-specific parameters of Cell 1 are specified in Table A.17.5.3.2.1.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on Cell 1 to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 on radio channel 1.
- UE has bandwidth part BWP-1 in its RRC-configuration for Cell 1.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 of initial condition in Cell 1.

All cells have constant signal levels throughout the test.

The test consists of 1 time period, with duration of T1.

During T1,

Time period T1 starts when a *RRCReconfiguration* with updated bandwidth part configuration, sent from the test equipment to the UE, is received at the UE side in PSCell's slot # denoted *i*. The UE shall reconfigure its bandwidth part with the updated bandwidth part BWP-1 of final condition.

The UE shall be able to completely receive PDSCH on Cell 1 from the first DL slot that occurs after the beginning of DL slot $i + \frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$ as defined in clause 8.6A.3 and starts to report valid ACK/NACK for the Cell 1 from the first UL slot that occurs after the beginning of DL slot $i + \frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}} + k1$. The UE shall be continuously scheduled on PSCell's BWP-1 starting from the first DL slot that occurs after the beginning of DL slot $i + \frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$.

$T_{RRCprocessingDelay}$ and $T_{BWPswitchDelayRRC}$ are defined in clause 8.6A.3.

The test equipment verifies the DL BWP switch time in PSCell by counting the time from the time when the RRC Reconfiguration message including updated BWP configurationis sent till the time when RRC Reconfiguration Complete message is received.

Table A.17.5.3.2.1.1-1: DL BWP switch supported test configurations

Config	Description

1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.17.5.3.2.1.1-2: General test parameters for DL BWP switch in SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
CP length		Normal	
DRX		OFF	
Cell-individual offset for cells on RF channel number 1	dB	0	
T1	s	[0.2]	

Table A.17.5.3.2.1.1-3: NR Cell specific test parameters for DL BWP switch in SA

Parameter		Unit	Cell 1
Frequency Range			FR2
Duplex mode			TDD
TDD configuration			TDDConf.3.1
$BW_{channel}$			100 MHz: $N_{RB,c}$ = 66
Active BWP ID			1
Initial Condition	Active DL BWP-1 Configuration		DLBWP.1.2 REDCAP
	Active UL BWP-1 Configuration		ULBWP.1.3
Final Condition	Active DL BWP-1 Configuration		DLBWP.1.1
	Active UL BWP-1 Configuration		ULBWP.1.1
'PDSCH Reference measurement channel			SR.3.1 TDD
RMSI CORESET parameters			CR.3.1 TDD
Dedicated CORESET parameters			CCR.3.1 TDD
OCNG Patterns			OP.1
SSB Configuration			SSB.1 FR2
SMTC Configuration			SMTC.1
TCI State			TCI.State.0
TRS Configuration			TRS.2.1 TDD
Antenna Configuration			1x2
Propagation Condition			AWGN
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.2 REDCAP is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].

Table A.17.5.3.2.1.1-4: OTA related test parameters for BWP switching test case

Parameter		Unit	Cell 2
Angle of arrival configuration			Setup 1 according to table A.3.15
Assumption for UE beams Note 5			Fine
N_{oc} Note1	NR_TDD_FR2_A	dBm/15kHz	-112
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
N_{oc} Note1	NR_TDD_FR2_A	dBm/SCS	-103
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
SS-RSRP Note2	NR_TDD_FR2_A	dBm/SCS Note3	-85
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
$\hat{E}_s/I_{ot}$		dB	18
Io Note2	NR_TDD_FR2_A	dBm/95.04 MHz Note4	-56
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		

Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone

Note 5:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.

A.17.5.3.2.1.2 Test Requirements

During T1, the UE shall be ready for the reception of uplink grant for PCell from the first DL slot that occurs after the beginning of slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$ and starts to report valid ACK/NACK for the PCell from the first UL slot that occurs after the beginning of DL slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$ + k1.

Where, *k1* is the timing between DL data receiving and acknowledgement as specified in [7].

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

A.17.5.4 Active TCI state switch delay

A.17.5.4.1 MAC-CE based active TCI state switch

A.17.5.4.1.1 NR PCell FR2 active TCI state switch for a known TCI state

A.17.5.4.1.1.1 Test Purpose and Environment

The purpose of this test is to verify the active TCI state switch delay requirement defined in clause 8.10B.3. Supported test configuration is shown in Table A.17.5.4.1.1.1-1.

The test scenario comprises of one NR PCell (Cell 1) as given in Table A.17.5.4.1.1.1-2. Cell-specific parameters of NR PCell are specified in Table A.17.5.4.1.1.1-3 below. The OTA related test parameters for FR2 are shown in Table A.17.5.4.1.1.1-4.

PDCCHs indicating new transmissions shall be sent continuously on PCell to ensure that the UE would have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC).
- UE is configured with 2 different TCI states for PCell, PDCCH TCI state 0 (QCL'd to SSB0) and TCIstate 1 (QCL'd to SSB1), in Cell 1 before starting the test.
- UE is indicated in TCI state 0 as the active PDCCH TCI state

The test consists of two time periods, T1 and T2. Figure A.17.5.4.1.1.1-1 and Figure A.17.5.4.1.1.1-2 show the Time multiplexed (allocation in Frequency is symbolic) downlink transmissions from each Angle of Arrival. During T1 only SSB to which PDCCH-TCI-state0 is QCL'd is transmitted. At the beginning of T2, the SSB corresponding to TCI state 1 starts transmitting. The UE is configured to provide periodic L1-RSRP reports. In slot n which is within 1280ms of UE providing L1-RSRP report with results for both SSB0 and SSB1, UE receives a MAC-CE command indicating a switch to TCI state 1. *tci-PresentInDCI* is not configured in the PDSCH configuration, i.e. TCI state for the PDSCH is identical to the PDCCH TCI state.

The test equipment verifies that UE can be scheduled on PCell on TCI state 0 till n+ T_{HARQ} +3 ms. The test equipment also verifies the TCI state switch time in PCell by scheduling the UE on TCI state 1 after n+ T_{HARQ} +3 ms + ($T_{first\text{-}SSB}$ + $T_{SSB\text{-}proc}$).

Table A.17.5.4.1.1.1-1: Supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.17.5.4.1.1.1-2: General test parameters for TCI state switch

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
CP length		Normal	
DRX		OFF	
T1	s	0.2	
T2	s	0.2	

Table A.17.5.4.1.1.1-3: NR Cell specific test parameters for TCI state switch

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
$BW_{channel}$		100 MHz: $N_{RB,c}$ = 66
Data RBs allocated		66
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3. 2 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP. 5
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
TCI State 0		TCI.State.0
TCI State 1		TCI.State.1
TRS Configuration		TRS.2.1 TDD
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		AWGN
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.		

Table A.17.5.4.1.1.1-4: OTA related test parameters for TCI state switch

Parameter	Unit	Cell 1			
		SSB0		SSB1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.3.15.3			
		AoA1		AoA2	
Assumption for UE beams Note 6		Rough			
$\hat{E}_s$	dBm/SCS	-80.6	-80.6	-Infinity	-80.6
SS B_RP Note 2	dBm/ SCS	-80.6	-80.6	-Infinity	-80.6
$\hat{E}_s/I_{ot}$ BB Note 7	dB	8.3	8.3	-Infinity	8.3
Io Note2	dBm/95.04 MHz Note4	-56.0	-56.0	- Infinity	-56.0

Note 1: Void
Note 2: SS B_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: Void
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the center of the quiet zone.
Note 6: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 7: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

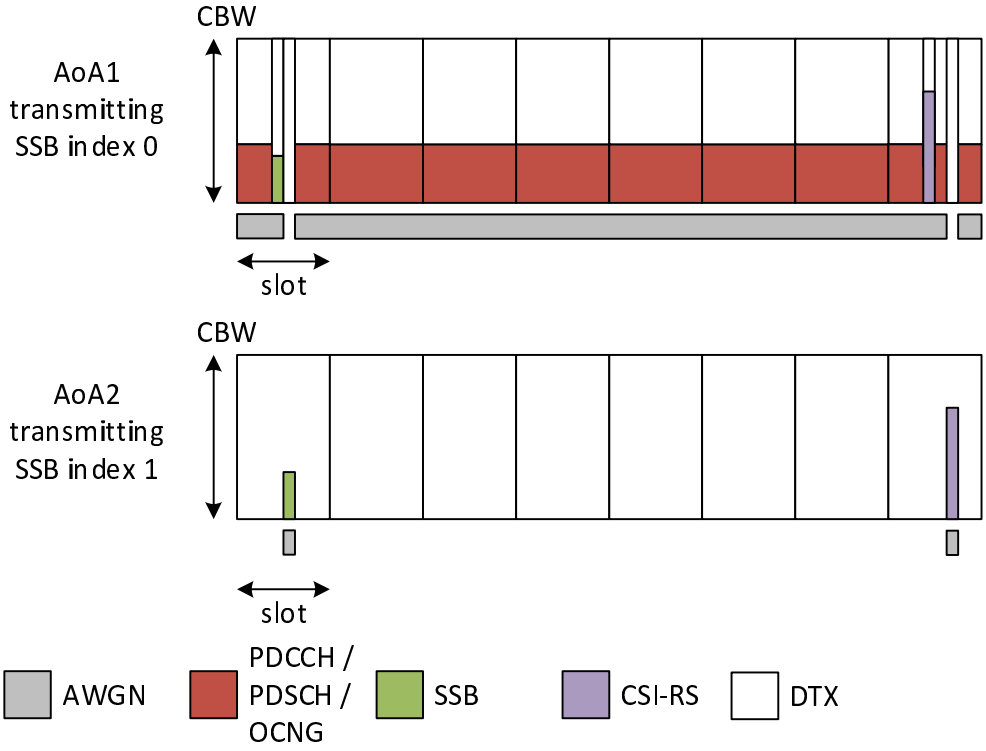

Figure A.17.5.4.1.1.1-1: Time multiplexed downlink transmissions during T1

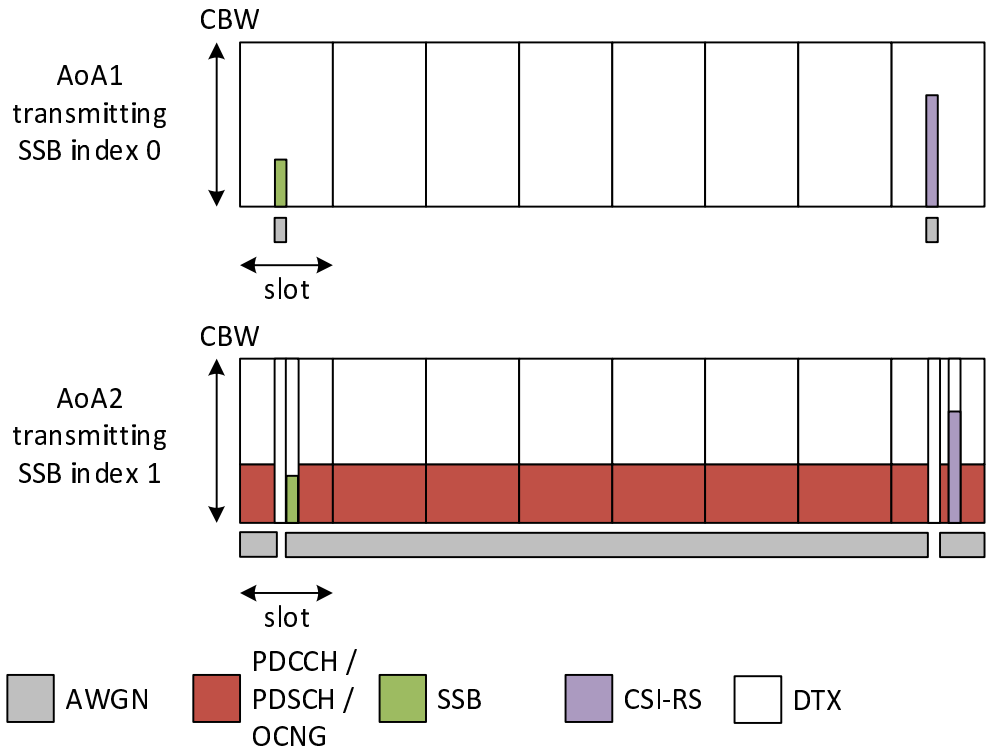

Figure A.17.5.4.1.1.1-2: Time multiplexed downlink transmissions during T2

A.17.5.4.1.1.2 Test Requirements

During T2, UE shall send L1-RSRP report with results for both SSB0 and SSB1.

After receiving MAC-CE command in slot n, UE shall:

- be able to continue to receive on TCI state 0 till n+ T_{HARQ} +3 ms
- be able to start receiving on TCI state 1 after n+ T_{HARQ} +5 ms + $T_{first\text{-}SSB}$

A.17.5.4.2 RRC based active TCI state switch

A.17.5.4.2.1 NR PCell FR2 active TCI state switch for a known TCI state

A.17.5.4.2.1.1 Test Purpose and Environment

The purpose of this test is to verify the active TCI state switch delay requirement defined in clause 8.10B.5. Supported test configuration is shown in Table A.17.5.4.2.1.1-1.

The test scenario comprises of one NR PCell as given in Table A.17.5.4.2.1.1-2. Cell-specific parameters of NR PCell is specified in Table A.17.5.4.2.1.1-3 below. The OTA related test parameters for FR2 is shown in Table A.17.5.4.2.1.1-4.

PDCCHs indicating new transmissions shall be sent continuously on PCell to ensure that the UE would have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC).
- UE is configured with 1 TCI state for PCell, PDCCH-TCI-state0 (QCL'd to SSB0)
- UE is indicated in TCI state0 as the active TCI state

The test consists of two time periods, T1 and T2. Figure A.17.5.4.2.1.1-1-1 and Figure A.17.5.4.2.1.1-1-2 show the Time multiplexed (allocation in Frequency is symbolic) downlink transmissions from each Angle of Arrival. During T1 only SSB to which TCI-state0 is QCL'd is transmitted. At the beginning of T2, the SSB corresponding to TCI-state1 starts transmitting. The UE is configured to provide periodic L1-RSRP reports. In slot n which is within 1280 ms of UE providing L1-RSRP report with results for both SSB0 and SSB1, UE receives a RRC command indicating a switch to TCI-state1.

The test equipment verifies the TCI state switch time in PCell by scheduling the UE on TCI state 1 after n+ $T_{RRC_processing}$ + $T_{first\text{-}SSB}$ + 2ms.

Table A.17.5.4.2.1.1-1-1: Supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.17.5.4.2.1.1-1-2: General test parameters for TCI state switch

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
CP length		Normal	
DRX		OFF	
T1	s	0.2	
T2	s	2	

Table A.17.5.4.2.1.1-1-3: NR Cell specific test parameters for TCI state switch

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
$BW_{channel}$		100 MHz: $N_{RB,c}$ = 66
Data RBs allocated		66
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3. 2 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP. 5
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
TCI State 0		TC. State.0
TCI State 1		TCI.State.1
reportConfigType		ssb-Index-RSRP

reportConfigType		periodic
Number of reported RS		2
L1-RSRP reporting period	slot	640
timeRestrictionForChannelMeasurements		configured
TRS Configuration		TRS.2.1 TDD
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		AWGN
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.		

Table A.17.5.4.2.1.1-1-4: OTA related test parameters for TCI state switch

Parameter	Unit	Cell 1			
		SSB0		SSB1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.3.15.3			
		AoA1		AoA2	
Assumption for UE beams Note 6		Rough			
$\hat{E}_s$	dBm/SCS	-80.6	-80.6	-Infinity	-80.6
SS B_RP Note 2	dBm/ SCS	-80.6	-80.6	-Infinity	-80.6
$\hat{E}_s / I_{ot}$ BB Note 7	dB	8.3	8.3	-Infinity	8.3
Io Note2	dBm/95.04 MHz Note4	-6.0	-56.0	- Infinity	-56.0

Note 1: Void
Note 2: SS B_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: Void
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the center of the quiet zone.
Note 6: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 7: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

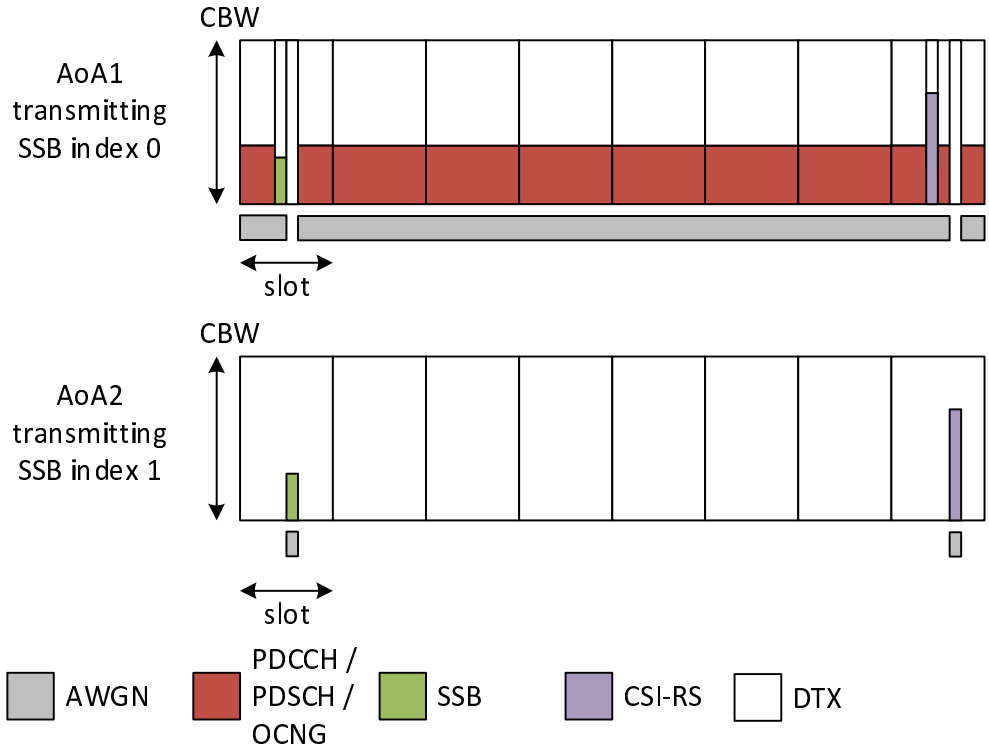

Figure A.17.5.4.2.1.1-1-1: Time multiplexed downlink transmissions during T1

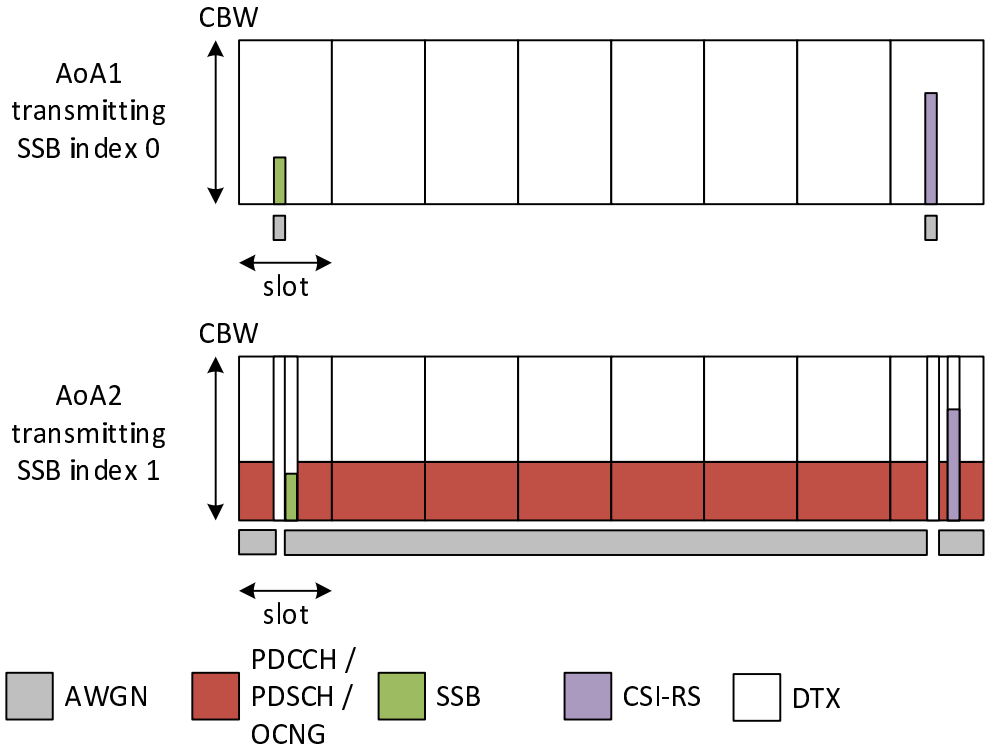

Figure A.17.5.4.2.1.1-1-2: Time multiplexed downlink transmissions during T2

A.17.5.4.2.1.2 Test Requirements

During T2, UE shall send L1-RSRP report with both SSB0 and SSB1.

After receiving RRC command in slot n, UE shall be able to start receiving on TCI state 1 after n+ $T_{RRC_processing}$ + $T_{first\text{-}SSB}$ + 2ms.

A.17.5.5 Uplink spatial relation switch delay

A.17.5.5.1 MAC-CE based Spatial Relation switch

A.17.5.5.1.1 NR PCell FR2 spatial relation associated with known DL-RS

A.17.5.5.1.1.1 Test Purpose and Environment

The purpose of this test is to verify fulfillment of the uplink spatial relation switch delay requirement defined in clause 8.12A.3 by a UE capable of beam correspondence without the need for UL beam sweeping. The supported test configurations are shown in Table A.17.5.5.1.1.1-1.

The test scenario comprises one PCell (Cell 1) as outlined in Table A.17.5.5.1.1.1-2. Cell-specific parameters are provided in Table A.17.5.5.1.1.1-3. OTA-related test parameters are provided in Table A.17.5.5.1.1.1-4.

Throughout the test, PDCCH indicating new transmissions shall ge sent continuously on PCell to ensure that the UE will send ACK/NACKs on PUCCH.

Before the test starts,

- UE is connected to Cell 1 on radio channel 1.
- UE is configured with a single TCI state, TCI State-0, which is QCLed with SSB0.
- UE is configured with two spatial relation information configurations Spatial Relation Info-0 and Spatial Relation Info-1 for PUCCH, each associated with SSB0 and SSB1, respectively.
- UE is indicated via MAC-CE activation of *PUCCH-SpatialRelationInfoId* corresponding to Spatial Relation Info-0
- UE is configured with a CSI measurement configuration indicating L1-RSRP measurements on SSB0 and SSB1 with periodic reporting. The L1-RSRP measurement period is influenced by the following: the higher layer parameter *timeRestrictionForChannelMeasurement* is configured, measured SSBs are fully overlapping with SMTC window, and there are no conflicts with measurement gaps.

The test consists of two time periods, T1 and T2. During T1 only the SSB associated with PDCCH TCI state-0 and PUCCH Spatial Relation Info-0 is transmitted. At the beginning of T2, transmission of the SSB associated with PUCCH Spatial Relation Info-1 starts. The UE conducts periodic L1-RSRP measurements and *SSB-Index-RSRP* reporting for SSB0 and SSB1. In slot *n*, which is within 1280ms after UE receiving both SSB0 and SSB1, and after reporting valid results for both the SSB0 and the SSB1, the UE receives a MAC-CE indicating a switch of spatial relation to PUCCH Spatial Relation Info 1.

The test equipment verifies that the UE transmits according to PUCCH Spatial Relation Info 0 up until slot *n* + T_{HARQ}/NR slot length + $3N_{slot}^{subframe,\mu}$, and according to PUCCH Spatial Relation Info 1 from slot *n* + T_{HARQ}/NR slot length + $3N_{slot}^{subframe,\mu}$ + 1 and onwards.

Table A.17.5.5.1.1.1-1: Supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.17.5.5.1.1.1-2: General test parameters

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
CP length		Normal	
DRX		OFF	
L1-RSRP reporting period	slot	160	Periodic L1-RSRP reporting configured
L1-RSRP measured RS		SSB0, SSB1	L1-RSRP measurements of SSB0 and SSB1.
Number of reported RS		2	L1-RSRP reporting of measurements on SSB0 and SSB1.
T1	s	[0.2]	
T2	s	[2]	

A.17.5.5.1.1.1: NR Cell specific test parameters

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
$BW_{channel}$		100 MHz: $N_{RB,c}$ = 66
Initial DL BWP Configuration		DLBWP.0.2

Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3.1 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP.1
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
TCI State-0 Configuration		TCI.State.0
reportConfigType		ssb-Index-RSRP
reportConfigType		periodic
timeRestrictionForChannelMeasurements		configured
TRS Configuration		TRS.2.1 TDD
Spatial Relation Info-0 Configuration		PUCCH.SRI.0
Spatial Relation Info-1 Configuration		PUCCH.SRI.1
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS Note 1		
EPRE ratio of OCNG to OCNG DMRS Note 1		
Propagation Condition		AWGN
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		

Table A.17.5.5.1.1.1-4: OTA related test parameters

Parameter	Unit	Cell 1			
		SSB0		SSB1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.3.15.3			
		AoA1		AoA2	
Assumption for UE beams Note 6		Rough			
N_{oc} Note 1	dBm/15 kHz	-92.1			
N_{oc} Note 1	dBm/SCS	-83.1			
$\hat{E}_s/N_{oc}$	dB	1		-infinity	1
SS-RSRP Note 2	dBm/120 kHz Note3	-82.1		-infinity	-82.1
Io Note2	dBm/95.04 MHz Note4	-50.6		-54.1	-50.6
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone					
Note 5: As observed with 0dBi gain antenna at the center of the quiet zone.					
Note 6: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.					

A.17.5.5.1.1.2 Test Requirements

During T2, the UE shall send L1-RSRP report with results for SSB0 and SSB1.

After receiving MAC-CE command in slot *n*, the UE shall:

- Continue transmitting using PUCCH spatial relation associated with SSB0 up to and including slot *n* + T_{HARQ}/NR slot length + $3N_{slot}^{subframe,\mu}$
- Start transmitting using PUCCH spatial relation associated with SSB1 from slot *n* + T_{HARQ}/NR slot length + $3N_{slot}^{subframe,\mu}$ + 1 and onwards.

The rate of correct events observed during repeated tests shall be at least [90]%.

A.17.5.5.2 RRC based spatial relation switch

A.17.5.5.2.1 NR PCell FR2 spatial relation switch associated with a known DL-RS

A.17.5.5.2.1.1 Test Purpose and Environment

The purpose of this test is to verify the RRC based spatial relation switch delay requirement defined in clause 8.12A.5 by a UE capable of beam correspondence without the need for UL beam sweeping. In the test the higher layer parameter *timeRestrictionForChannelMeasurements* is configured. Supported test configuration is shown in Table A.17.5.5.2.1.1-1.

The test scenario comprises of one PCell (Cell 1) as given in Table A.17.5.5.2.1.1-2. Cell-specific parameters of PCell is specified in Table A.17.5.5.2.1.1-3 below. The OTA related test parameters for FR2 is shown in Table A.17.5.5.2.1.1-4.

Periodic SRS is transmitted on PCell (Cell 1), and the SRS configuration is SRSConf.1 given in Table A.5.4.1.1.1-3.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC).
- UE is configured with 1 SRS-SpatialRelation0 associated with SSB0.
- UE is indicated SRS-SpatialRelation0 as the active SRS spatial relation.

The test consists of two time periods, T1 and T2. During T1 only SSB0 to which SRS-SpatialRelation0 associated is transmitted. UE shall transmit periodic SRS with SRS-SpatialRelation0 on the UL of the PCell.

T2 start when the tester initiates transmission of SSB1 corresponding to SRS-SpatialRelation1. The UE is configured to transmit periodic L1-RSRP reports.

In slot n, which is within [1280]ms of UE providing the L1-RSRP report with results for both SSB0 and SSB1, the UE receives an RRC command indicating a switch to transmit periodic SRS with target SRS-SpatialRelation1. The UE shall be able to transmit periodic SRS with target spatial relation (SRS-SpatialRelation1) on PCell in slot n + $T_{RRC_processing}$/NR slot length +1.

Table A.17.5.5.2.1.1-1: Supported test configurations

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.17.5.5.2.1.1-2: General test parameters for spatial relation switch associated with a known DL-RS

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
CP length		Normal	
DRX		OFF	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
timeRestrictionForChannelMeasurements		configured	Time domain measurement restriction for the channel (signal) measurements (see TS 38.214 [19], clause 5.2.1.1)
T1	s	0.5	
T2	s	1.5	

Table A.17.5.5.2.1.1-3: NR Cell specific test parameters for spatial relation switch associated with a known DL-RS

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
$BW_{channel}$		100 MHz: $N_{RB,c}$ = 66
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3.1 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP.1
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
SRS-SpatialRelation0		SRS.SRI0
SRS-SpatialRelation1		SRS.SRI1
reportConfigType		ssb-Index-RSRP
reportConfigType		periodic
Number of reported RS		2
L1-RSRP reporting period	slot	160
TRS Configuration		TRS.2.1 TDD
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS (Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		

Table A.17.5.5.2.1.1-4: OTA related test parameters for spatial relation switch associated with a known DL-RS

Parameter	Unit	Cell 1			
		SSB0		SSB1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.3.15.3			
		AoA1		AoA2	
Assumption for UE beams Note 6		Rough		Rough	
N_{oc} Note 1	dBm/15 kHz	-92.1			
N_{oc} Note 1	dBm/SCS	-83.1			
$\hat{E}_s/N_{oc}$	dB	1	1	-Infinity	1
SS-RSRP Note 2	dBm/120 kHz Note3	-82.1	-82.1	-Infinity	-82.1
Io Note2,Note6	dBm/95.04 MHz Note4	-50.6	-50.6	-54.1	-50.6

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the center of the quiet zone.
Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.17.5.5.2.1.2 Test Requirements

During T1 UE shall send L1-RSRP report with SSB0 to which SRS-SpatialRelation0 is associated. During T2, UE shall send L1-RSRP report with SSB1 to which SRS-SpatialRelation1 is associated.

After receiving RRC command in slot n, UE shall be able to transmit target periodic SRS with SRS-SpatialRelation1 on the PCell in the slot n + $T_{RRC_processing}$/*NR slot length* + 1.

The rate of correct events observed during repeated tests shall be at least 90%.

A.17.5.6 UE specific CBW change

A.17.5.6.1 NR FR2 UE specific CBW change of PCell with non-DRX in SA

A.17.5.6.1.1 Test Purpose and Environment

The purpose of this test is to verify the UE specific CBW change delay requirement defined in clause 8.13A. Supported test configurations are shown in Table A.17.5.6.1.1-1.

The test scenario comprises of one PCell (Cell 1) as given in Table A.17.5.6.1.1-2. Cell-specific parameters of PCell are specified in Table A.17.5.6.1.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK transmission.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC).

- UE has bandwidth part BWP-1 in its RRC-configuration for Cell 1 (PCell).
- UE is indicated in firstActiveDownlinkBWP-Id that the active DL BWP is BWP-1 of initial condition in PCell.
- UE has been configured with UE-specific CBW (CBW-1)
- UE is indicated in SCS-SpecificCarrier [2] that the UE-specific CBW is CBW-1 as the initial condition in Cell 1 (PCell).

All cells have constant signal levels throughout the test.

The test consists of 1 time period, with duration of T1.

During T1,

Time period T1 starts when a *RRCReconfiguration* with updated CBW configuration, sent from the test equipment to the UE, is received at the UE side in PCell's slot # denoted *i*. The UE shall reconfigure its CBW with the updated CBW of final condition.

The UE shall be able to completely receive PDSCH on PCell from the first DL slot that occurs after the beginning of DL slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{CBWchangeDelayRRC}}}{\text{NR Slot length}}$ as defined in clause 8.13.2 and starts to report valid ACK/NACK for the PCell from the first UL slot that occurs after the beginning of DL slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{CBWchangeDelayRRC}}}{\text{NR Slot length}}$ + k1. The UE shall be continuously scheduled on PCell's new CBW starting from the first DL slot that occurs after the beginning of DL slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{CBWchangeDelayRRC}}}{\text{NR Slot length}}$.

$T_{RRCprocessingDelay}$ and $T_{CBWchangeDelayRRC}$ are defined in clause 8.13A.

The test equipment verifies the UE specific CBW switch time in PCell by counting the time from the time when the RRC Reconfiguration message including updated CBW configurations sent till the time when RRC Reconfiguration Complete message is received.

Table A.17.5.6.1.1-1: UE specific CBW change supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.17.5.6.1.1-2: General test parameters for UE specific CBW change in NR SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
CP length		Normal	
DRX		OFF	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
T1	s	[0.2]	

Table A.17.5.6.1.1-3: NR Cell specific test parameters for UE specific CBW change in NR SA

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD

TDD configuration			TDDConf.3.1
$BW_{channel}$			100 MHz: $N_{RB,c}$ = 66
Active DL BWP ID			1
Initial DL BWP Configuration (BWP-1)			DLBWP.0.2
Initial UL BWP Configuration			ULBWP.0.2
Initial Condition	Active DL CBW-1 Configuration		DLCBW.1.1
	Active UL CBW-1 Configuration		ULCBW.1.1
Final Condition	Active DL CBW-1 Configuration		DLCBW.1.2
	Active UL CBW-1 Configuration		ULCBW.1.2
'PDSCH Reference measurement channel			SR.3.1 TDD
RMSI CORESET parameters			CR.3.1 TDD
Dedicated CORESET parameters			CCR.3.1 TDD
OCNG Patterns			OP.1
SSB Configuration			SSB.1 FR2
SMTC Configuration			SMTC.1
TCI State			TCI.State.0
TRS Configuration			TRS.2.1 TDD
Antenna Configuration			1x2
Propagation Condition			AWGN
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			

Table A.17.5.6.1.1-4: OTA related test parameters for UE specific CBW change test case

Parameter		Unit	Cell 2
Angle of arrival configuration			Setup 1 according to table A.3.15
Assumption for UE beams Note 5			Fine
N_{oc} Note1	NR_TDD_FR2_A	dBm/15kHz	-112
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
N_{oc} Note1	NR_TDD_FR2_A	dBm/SCS	-103
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
SS-RSRP Note2	NR_TDD_FR2_A	dBm/SCS Note3	-85
	NR_TDD_FR2_B		

	NR_TDD_FR2_F NR_TDD_FR2_G NR_TDD_FR2_T NR_TDD_FR2_Y		
$\hat{E}_s/I_{ot}$		dB	18
Io[Note2]	NR_TDD_FR2_A NR_TDD_FR2_B NR_TDD_FR2_F NR_TDD_FR2_G NR_TDD_FR2_T NR_TDD_FR2_Y	dBm/95.04 MHz [Note4]	-56

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone

Note 5: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.

A.17.5.6.1.2 Test Requirements

During T1, the UE shall be ready for the reception of uplink grant for PCell from the first DL slot that occurs after the beginning of slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{CBWchangeDelayRRC}}}{\text{NR Slot length}}$ and starts to report valid ACK/NACK for the PCell from the first UL slot that occurs after the beginning of DL slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{CBWchangeDelayRRC}}}{\text{NR Slot length}}$ + k1.

Where, *k1* is the timing between DL data receiving and acknowledgement as specified in [7].

All of the above test requirements shall be fulfilled in order for the observed PCell UE specific CBW change delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

A.17.6 Measurement procedure for RedCap

A.17.6.1 Intra-frequency Measurements

A.17.6.1.1 SA event triggered reporting test without gap under non-DRX

A.17.6.1.1.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements for RedCap in clause 9.2B.5.1 and 9.2B.5.2. Supported test configurations are shown in table A.17.6.1.1.1-1.

Table A.17.6.1.1.1-1: supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Note: The UE is only required to be tested in one of the supported test configurations.

There are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.17.6.1.1.1-2, A.17.6.1.1.1-3 and A.17.6.1.1.1-4 below.

In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

Table A.17.6.1.1.1-2: General test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 without gap without DRX for RedCap

Parameter	Unit	Config	Value	Comment
Active cell		1, 2	PCell (Cell 1)	
Neighbour cell		1, 2	Cell 2	Cell to be identified.
RF Channel Number		1, 2	1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
SMTC configuration		1, 2	SMTC.1	
A3-Offset	dB	1, 2	-11	
CP length		1, 2	Normal	
Hysteresis	dB	1, 2	0	
TimeToTrigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX		1, 2	OFF	
Time offset between Cell 1 and Cell 2		1, 2	3 μs	Synchronous cells
T1	s	1, 2	5	
T2	s	1, 2	5	

Table A.17.6.1.1.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 without gap without DRX for RedCap

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	1, 2	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		1	24		24	
		2	48		48	
Intial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2	SSB		SSB	
PDSCH RMC configuration		1	SR.3.2 TDD		N/A	
		2	SR.3.3 TDD			
RMSI CORESET RMC configuration		1	CR.3.1 TDD		N/A	
		2	CR.3.2 TDD		N/A	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD		N/A	
		2	CCR.3.7 TDD		N/A	
TRS configuration		1, 2	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI states		1, 2	TCI.State.2		N/A	

PDSCH/PDCCH subcarrier spacing	kHz	1, 2	120	120
OCNG Patterns		1, 2	OP.5	N/A
cellIndividualOffset	dB	1~2	N/A	16
SSB		1	SSB.1 FR2	SSB.7 FR2
		2	SSB.2 FR2	SSB.8 FR2
Propagation Condition		1, 2	AWGN	AWGN

Table A.17.6.1.1.1-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 without gap without DRX for RedCap

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1, 2	Setup 3 defined in A.3.15.3			
			AoA1		AoA2	
Beam assumption[Note 4]		1,2	Rough		Rough	
E_s	dBm/SCS	1	-89	-89	-Infinity	-89
		2	-86	-86	-Infinity	-86
$\hat{E}_s / I_{ot}$ BB Note 5	dB	1, 2	-0.12	-0.12	-Infinity	-0.12
SSB_RP	dBm/SCS	1	-89	-89	-Infinity	-89
		2	-86	-86	-Infinity	-86
Io	dBm/95.04MHz	1	-64.41	-64.41	-Infinity	-64.41
		2	-61.41	-61.41	-Infinity	-61.41
Time multiplexing of the downlink transmissions from each AoA		1, 2	Defined in Figure A.17.6.1.1.1-1			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Void
Note 3: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 5: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

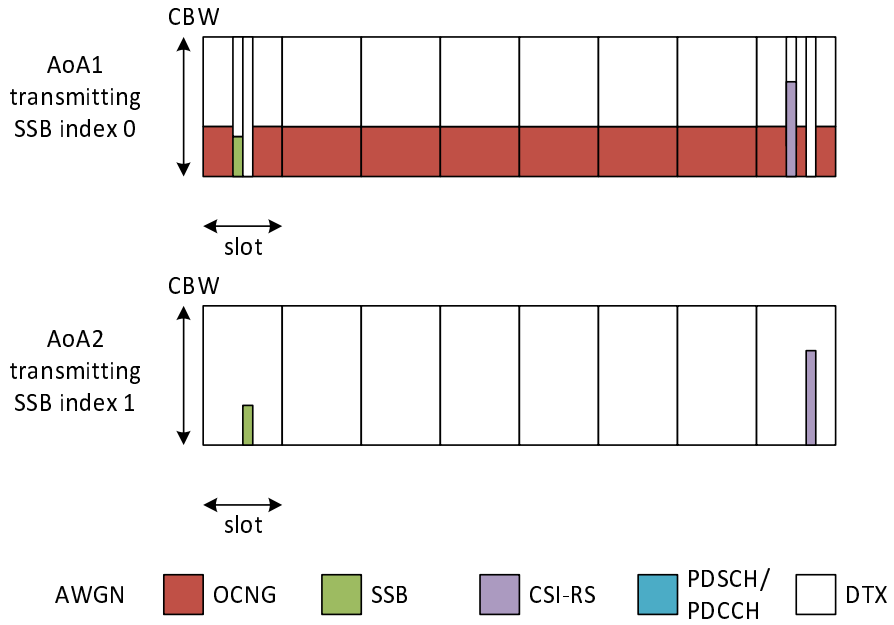

Figure A.17.6.1.1.1-1: Time multiplexed downlink transmissions (Config 1 example)

A.17.6.1.1.2 Test Requirements

In the test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 2.4s for a UE supporting power class 1 or 5,
- 1.44s for a UE supporting power class 2, 3, 4 or 7.

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to 2xTTIDCCH higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.17.6.1.2 SA event triggered reporting test without gap under DRX

A.17.6.1.2.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2B.5.1 and 9.2B.5.2. Supported test configurations are shown in table A.7.6.1.2.1-1.

There are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.7.6.1.2.1-2, A.7.6.1.2.1-3 and A.7.6.1.2.1-4.

In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furhtermore UE is allocated with PUSCH resource at every DRX cycle.

A.7.6.1.2.2 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 7.2s for a UE supporting power class 1 or 5,
- 4.32s for a UE supporting power class 2, 3, 4, or 7.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 51.2s for a UE supporting power class 1 or 5,
- 30.72s for a UE supporting power class 2, 3 4, or 7.

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.17.6.1.3 SA event triggered reporting test with per-UE gaps under non-DRX

A.17.6.1.3.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2B.6.1 and 9.2B.6.2. Supported test configurations are shown in table A.17.6.1.3.1-1.

Table A.17.6.1.3.1-1: supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.17.6.1.3.1-2 ~ 4 below.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

Table A.17.6.1.3.1-2: General test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 with per-UE gaps without DRX

Parameter	Unit	Config	Value	Comment
Active cell		1, 2	PCell (Cell 1)	
Neighbour cell		1, 2	Cell 2	Cell to be identified.
RF Channel Number		1, 2	1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
Gap type		1, 2	Per-UE gaps	
Measurement gap repitition periodicity	ms	1, 2	40	
Measurement gap length	ms	1, 2	6	
Measurement gap offset	ms	1, 2	4	
SMTC configuration for CD-SSB		1, 2	SMTC.1 RedCap	
SMTC configuration for NCD-SSB		1, 2	SMTC.2 RedCap	
CSI-RS parameters		1, 2	CSI-RS.3.2 TDD	
A3-Offset	dB	1, 2	-11	
CP length		1, 2	Normal	
Hysteresis	dB	1, 2	0	
Time To Trigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX		1, 2	OFF	
Time offset between Cell 1 and Cell 2		1, 2	3 μs	Synchronous cells
T1	s	1, 2	5	
T2	s	1, 2	5	

Table A.17.6.1.3.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 with per-UE gaps without DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	1, 2	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		1	24		24	
		2	48		48	
Intial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Dedicated DL BWP configuration		1, 2	DLBWP.1.3 RedCap Note 1		DLBWP.1.3 RedCap Note 1	
Dedicated UL BWP configuration		1, 2	ULBWP.1.3 RedCap Note 2		ULBWP.1.3 RedCap Note 2	
RLM-RS		1, 2	CSI-RS		SSB	
PDSCH RMC configuration		1	SR.3.2 TDD		N/A	
		2	SR.3.3 TDD			
RMSI CORESET RMC configuration		1	CR.3.1 TDD		N/A	
		2	CR.3.2 TDD		N/A	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD		N/A	
		2	CCR.3.7 TDD		N/A	

TRS configuration		1, 2	TRS.2.1 TDD	N/A
PDSCH/PDCCH TCI states		1, 2	TCI.State.2	N/A
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	120	120
OCNG Patterns		1, 2	OP.5	N/A
cellIndividualOffset	dB	1~2	N/A	16
CD-SSB		1	SSB.2 RedCap FR2	SSB.2 RedCap FR2
		2	SSB.4 RedCap FR2	SSB.4 RedCap FR2
NCD-SSB		1, 2	SSB.3 RedCap FR2	SSB.3 RedCap FR2
			SSB.5 RedCap FR2	SSB.5 RedCap FR2
Propagation Condition		1, 2	AWGN	AWGN
Note 1: The starting PRB index for dedicated DL BWP1 corresponding to CD-SSB PRB index; the starting PRB index for dediacted DL BWP2 corresponding to NCD-SSB PRB index; Note 2: The starting PRB index for dedicated UL BWP1 is the same as the starting PRB index for dedicated DL BWP1; the starting PRB index for dedicated UL BWP2 is the same as the starting PRB index for dedicated DL BWP2.				

Table A.17.6.1.3.1-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 with per-UE gaps without DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1, 2	Setup 3 defined in A.3.15.3			
			AoA1		AoA2	
Beam Assumption[Note 4]		1,2	Rough		Rough	
E_s	dBm/SCS	1	-89	-89	-Infinity	-89
		2	-86	-86	-Infinity	-86
$\hat{E}_s/I_{ot}$ BB Note 5	dB	1, 2	-0.12	-0.12	-Infinity	-0.12
SSB_RP	dBm/SCS	1	-89	-89	-Infinity	-89
		2	-86	-86	-Infinity	-86
Io	dBm/95.04MHz	1	-64.41	-64.41	-Infinity	-64.41
		2	-61.41	-61.41	-Infinity	-61.41
Time multiplexing of the downlink transmissions from each AoA		1	Defined in Figure A.17.6.1.3.1-1			
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 2: Void Note 3: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation Note 5: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.						

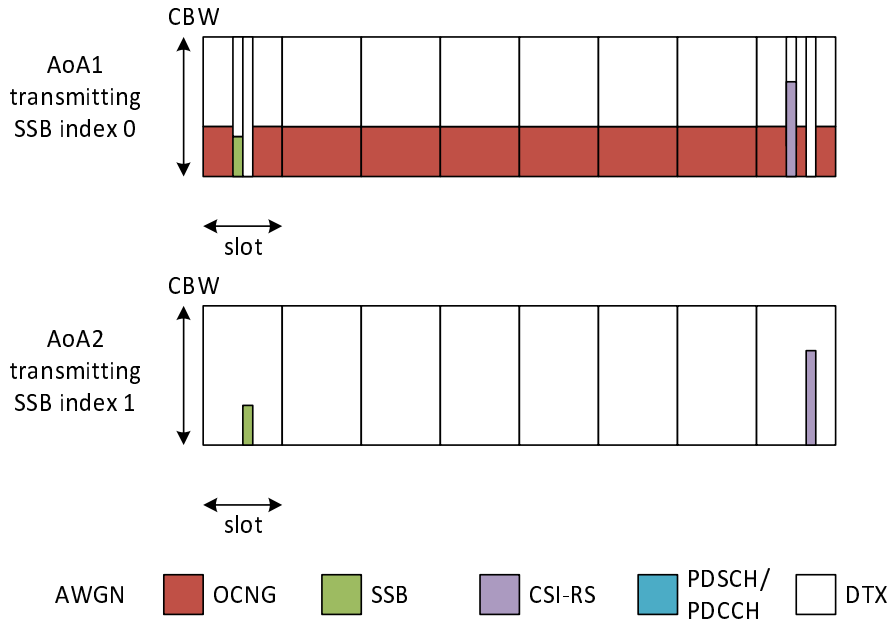

Figure A.17.6.1.3.1-1: Time multiplexed downlink transmissions (Config 1 example)

A.17.6.1.3.2 Test Requirements

In the test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 3.2s for a UE supporting power class 1 or 5,
- 1.92s for a UE supporting power class 2, 3 4 or 7

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.17.6.1.4 SA event triggered reporting test with per-UE gaps under DRX

A.17.6.1.4.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2B.6.1 and 9.2B.6.2. Supported test configurations are shown in table A.17.6.1.4.1-1.

Table A.17.6.1.4.1-1: supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Note: The UE is only required to be tested in one of the supported test configurations.

There are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.17.6.1.4.1-2, A.17.6.1.4.1-3 and A.17.6.1.4.1-4 below.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furhtermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.17.6.1.4.1-2: General test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 with per-UE gaps with DRX

Parameter	Unit	Config	Value		Comment
			Test 1	Test 2	
Active cell		1, 2	PCell (Cell 1)		
Neighbour cell		1, 2	Cell 2		Cell to be identified.
RF Channel Number		1, 2	1: Cell 1 and Cell 2		One TDD carrier frequency is used for the NR cells.
Gap type		1, 2	Per-UE gaps		
Measurement gap repitition periodicity	ms	1, 2	40		
Measurement gap length	ms	1, 2	6		
Measurement gap offset	ms	1, 2	39		
SMTC configuration		1, 2	SMTC.1		
CSI-RS parameters		1, 2	CSI-RS.3.2 TDD		
A3-Offset	dB	1, 2	-6		
CP length		1, 2	Normal		
Hysteresis	dB	1, 2	0		
Time To Trigger	s	1, 2	0		
Filter coefficient		1, 2	0		L3 filtering is not used
DRX		1, 2	DRX.1	DRX.7	DRX related parameters are defined in Table A.7.6.1.2.1-5
Time offset between Cell 1 and Cell 2		1, 2	3 µs		Synchronous cells
T1	s	1, 2	5		
T2	s	1, 2	10	52	

Table A.17.6.1.4.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 with per-UE gaps with DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	1, 2	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		1, 2	66		66	

Intial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Active DL BWP configuration		1, 2	DLBWP.1.2	DLBWP.1.1
Active UL BWP configuration		1, 2	ULBWP.1.2	ULBWP.1.1
RLM-RS		1, 2	SCSI-RS	SSB
PDSCH RMC configuration		1	SR.3.2 TDD	N/A
		2	SR.3.3 TDD	
RMSI CORESET RMC configuration		1	CR.3.1 TDD	N/A
		2	CR.3.2 TDD	N/A
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD	N/A
		2	CCR.3.7 TDD	N/A
TRS configuration		1, 2	TRS.2.1 TDD	N/A
PDSCH/PDCCH TCI state		1, 2	TCI.State.2	N/A
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	120	120
OCNG Patterns		1, 2	OP.1	OP.1
SSB		1	SSB.3 FR2	SSB.3 FR2
		2	SSB.4 FR2	SSB.4 FR2
Propagation Condition		1, 2	AWGN	AWGN

Table A.17.6.1.4.1-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 with per-UE gaps with DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1, 2	Setup 1 defined in A.3.15.1			
Beam Assumption Note 4		1,2	Rough			
$\hat{E}_s/I_{ot}$ BB Note 5	dB	1, 2	3.77	-1.52	-Infinity	-1.52
N_{oc} Note 2	dBm/15 KHz	1, 2	-98			
N_{oc} Note 2	dBm/SCS	1	-89			
		2	-86			
SSB_RP	dBm/SCS	1	-85	-85	-Infinity	-85
		2	-82	-82	-Infinity	-82
$\hat{E}_s/N_{oc}$	dB	1, 2	4	4	-Infinity	4
Io	dBm/95.04MHz	1,2	-54.53	-52.18	See Cell 1 columns	

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Note 5: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

Table A.17.6.1.4.1-5: Void

Table A.17.6.1.4.1-6:Void

A.17.6.1.4.2 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 7.2s for a UE supporting power class 1 or 5,
- 4.32s for a UE supporting power class 2, 3 4 or 7

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 51.2s for a UE supporting power class 1 or 5,
- 30.72s for a UE supporting power class 2, 3 4 or 7

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.17.6.2 Inter-frequency Measurements

A.17.6.2.1 SA event triggered reporting tests For FR2 without SSB time index detection when DRX is not used (PCell in FR2)

A.17.6.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as PCell in FR2 on NR RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.17.6.2.1.1-1, A.17.6.2.1.1-2, and A.17.6.2.1.1-3.

Measurement gap pattern configuration # 13 as defined in Table A.17.6.2.1.1-2 is provided for UE that does not support per-FR gap and for UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Supported test configurations are shown in table A.17.6.2.1.1-1.

Table A.17.6.2.1.1-1 SA event triggered reporting tests without SSB index reading for FR2-FR2

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Note 1: Void.

Table A.17.6.2.1.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2 without SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1, 2	Two FR2 NR carrier frequencies is used.
Active cell		Config 1	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1	NR cell 2	NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1	13	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	39	
SMTC-CD-SSB parameters		Config 1	SSB.2 RedCap FR2	As specified in clause A.3.10.2
NCD-SSB parameters		Config 1	SSB.3 RedCap FR2	
offsetMO	dB	Config 1	16	Applied to NR Cell 2 measurement object
A3-Offset	dB	Config 1	-11	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX		Config 1	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3μs	Synchronous cells.
T1	s	Config 1	5	
T2	s	Config 1	5.2 for PC1; 3.5 for other PC	

Table A.17.6.2.1.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2 without SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1	Setup 3 as specified in clause A.3.15			
				AoA1		AoA2	
Beam Assumption[Note 7]			1,2	Rough		Rough	
NR RF Channel Number			Config 1	1		2	
Duplex mode			Config 1	TDD		TDD	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated			Config 1	66		66	
BWP BW		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	

	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
	Dedicated DL BWP configuration			DLBWP.1.3 RedCap Note 9		N/A	
	Dedicated UL BWP configuration			ULBWP.1.3 RedCap Note 10		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
SMTC configuration defined in A.3.11.1 and A.3.11.2 for CD-SSB			Config 1	SMTC.1		SMTC.1	
SMTC configuration for NCD-SSB			Config 1	SMTC.2 RedCap		SMTC.2 RedCap	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120	
TRS configuration			Config 1	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI state			Config 1	TCI.State.2		N/A	
EPRE ratio of PSS to SSS			Config 1	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
$\hat{E}_s$		dBm/SCS	Config 1	-87	-87	-Infinity	-87
SSBRP Note 3		dBm/SCS Note5	Config 1	-87	-87	-Infinity	-87
$\hat{E}_s / I_{ot}$ BB Note 8		dB	Config 1	1.89	1.89	-Infinity	1.89
Io Note3		dBm/95.04 MHz Note5	Config 1	-58.01	-58.01	-Infinity	-58.01
Propagation Condition			Config 1	AWGN		AWGN	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	VoidNote 3: SSBRP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Void
Note 5:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6:	As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 8:	Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.
Note 9:	The starting PRB index for dedicated DL BWP1 corresponding to CD-SSB PRB index; the starting PRB index for dediacted DL BWP2 corresponding to NCD-SSB PRB index;
Note 10:	The starting PRB index for dedicated UL BWP1 is the same as the starting PRB index for dedicated DL BWP1; the starting PRB index for dedicated UL BWP2 is the same as the starting PRB index for dedicated DL BWP2.

A.17.6.2.1.2 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

5120 for UE supporting power class 1, or

3200 for UE supporting other power class.

The UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.17.6.2.2 SA event triggered reporting tests For FR2 without SSB time index detection when DRX is used (PCell in FR2)

A.17.6.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that RedCap UE makes correct reporting of an event in FR2. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3B.4.

In this test, there are two cells: NR cell 1 as PCell in FR2 on NR RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.17.6.2.2.1-1, A.17.6.2.2.1-2, and A.17.6.2.2.1-3.

In test 1&2 measurement gap pattern configuration # 13 as defined in Table A.17.6.2.2.1-2 is provided for RedCap UE that does not support per-FR gap and for RedCap UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Supported test configurations are shown in table A.17.6.2.2.1-1.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furhtermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.17.6.2.2.1-1: SA event triggered reporting tests without SSB index reading for FR2-FR2

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: Void.	

Table A.17.6.2.2.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2 without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1	1, 2		Two FR2 NR carrier frequencies is used.
Active cell		Config 1	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1	NR cell 2		NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1	13		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	39		
SMTC-SSB parameters		Config 1	SSB.3 FR2		As specified in clause A.3.10.2
A3-Offset	dB	Config 1	-6		
Hysteresis	dB	Config 1	0		
CP length		Config 1	Normal		
TimeToTrigger	s	Config 1	0		
Filter coefficient		Config 1	0		L3 filtering is not used
DRX		Config 1	DRX.1	DRX.7	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1	3µs		Synchronous cells.
T1	s	Config 1	5		
T2	s	Config 1	8 for PC1; 5 for other PC	82 for PC1; 52 for other PC	

Table A.17.6.2.2.1-3: Cell specific test parameters for CA inter-frequency event triggered reporting without SSB time index detection

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		Config 1	Setup 1 as specified in clause A.3.15			
Beam Assumption[Note 7]		Config 1	Rough		Rough	
NR RF Channel Number		Config 1	1		2	
TDD configuration		Config 1	TDDConf.3.1		TDDConf.3.1	
Duplex mode		Config 1	TDD		TDD	
$BW_{channel}$	MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		Config 1	66		66	
BWP BW	MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	

BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120	
TRS configuration			Config 1	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI state			Config 1	TCI.State.2		N/A	
EPRE ratio of PSS to SSS			Config 1	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		dBm/15 kHz Note5		-104.7		-104.7	
N_{oc} Note2		dBm/SCS Note4	Config 1	-95.7		-95.7	
SS-RSRP Note 3		dBm/SCS Note5	Config 1	-89.7	-89.7	-Infinity	-86.7
$\hat{E}_s/I_{ot}$		dB	Config 1	6	6	-Infinity	9
$\hat{E}_s/N_{oc}$		dB	Config 1	6	6	-Infinity	9
Io Note3		dBm/95.04 MHz Note5	Config 1	-59.7	-59.7	-66.7	-57.2
Propagation Condition			Config 1	AWGN		AWGN	
Antenna Configuration			Config 1	1x2		1x2	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Void
Note 5:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6:	As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.17.6.2.2.2 Test Requirements

In test 1 the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X1 ms from the beginning of time period T2, where X1 is

7680 for UE supporting power class 1, or

4800 for UE supporting other power class.

In test 2 the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X2 ms from the beginning of time period T2, where X2 is

81920 for UE supporting power class 1, or

51200 for UE supporting other power class.

In test 1 and 2 UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.17.6.2.3 SA event triggered reporting tests For FR2 with SSB time index detection when DRX is not used (PCell in FR2)

A.17.6.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3B.4.

In this test, there are two cells: NR cell 1 as PCell in FR2 on NR RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.17.6.2.3.1-1, A.17.6.2.3.1-2, and A.17.6.2.3.1-3.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Supported test configurations are shown in table A.17.6.2.3.1-1.

Table A.17.6.2.3.1-1: SA event triggered reporting tests with SSB index reading for FR2-FR2

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: Void.	

Table A.17.6.2.3.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2 with SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1, 2	Two FR2 NR carrier frequencies is used.
Active cell		Config 1	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1	NR cell 2	NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1	13	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	39	
SMTC-SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
offsetMO	dB	Config 1	16	Applied to NR Cell 2 measurement object
A3-Offset	dB	Config 1	-11	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX		Config 1	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3μs	Synchronous cells.
T1	s	Config 1	5	
T2	s	Config 1	7 for PC1; 4.5 for other PC	

Table A.17.6.2.3.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2 with SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1	Setup 3 as specified in clause A.3.15			
				AoA1		AoA2	
Beam Assumption[Note 7]			Config 1	Rough		Rough	
NR RF Channel Number			Config 1	1		2	
Duplex mode			Config 1	TDD		TDD	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated			Config 1	66		66	
BWP BW		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	

	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120	
TRS configuration			Config 1	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI state			Config 1	TCI.State.2		N/A	
EPRE ratio of PSS to SSS			Config 1	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
$\hat{E}_s$		dBm/SCS	Config 1	-87	-87	-Infinity	-87
SSBRP Note 3		dBm/SCS Note5	Config 1	-87	-87	-Infinity	-87
$\hat{E}_s / I_{ot}$ BB Note 8		dB	Config 1	1.89	1.89	-Infinity	1.89
Io Note3		dBm/95.04 MHz Note5	Config 1	-58.01	-58.01	-Infinity	-58.01
Propagation Condition			Config 1	AWGN		AWGN	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Void
Note 3:	SBRP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Void
Note 5:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6:	As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 8:	Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.

A.17.6.2.3.2 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

6720 for UE supporting power class 1, or

4160 for UE supporting other power class.

The UE is required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.17.6.2.4 SA event triggered reporting tests For FR2 with SSB time index detection when DRX is used (PCell in FR2) for 2 RX UE

A.17.6.2.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3B.4.

In this test, there are two cells: NR cell 1 as PCell in FR2 on NR RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.17.6.2.4.1-1, A.17.6.2.4.1-2, and A.17.6.2.4.1-3.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Supported test configurations are shown in table A.17.6.2.4.1-1.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furhtermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.17.6.2.4.1-1: SA event triggered reporting tests with SSB index reading for FR2-FR2

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: Void.	

Table A.17.6.2.4.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2 with SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1	1, 2		Two FR2 NR carrier frequencies is used.
Active cell		Config 1	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1	NR cell 2		NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1	13		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	39		
SMTC-SSB parameters		Config 1	SSB.3 FR2		As specified in clause A.3.10.2
A3-Offset	dB	Config 1	-6		
Hysteresis	dB	Config 1	0		
CP length		Config 1	Normal		
TimeToTrigger	s	Config 1	0		
Filter coefficient		Config 1	0		L3 filtering is not used
DRX		Config 1	DRX.1	DRX.7	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1	3μs		Synchronous cells.
T1	s	Config 1	5		
T2	s	Config 1	11 for PC1; 6.5 for other PC	108 for PC1; 67 for other PC	

Table A.17.6.2.4.1-3: Cell specific test parameters for CA inter-frequency event triggered reporting with SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1	Setup 1 as specified in clause A.3.15			
Beam Assumption[Note 7]			Config 1	Rough		Rough	
NR RF Channel Number			Config 1	1		2	
Duplex mode			Config 1	TDD		TDD	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated			Config 1	66		66	
BWP BW		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	

OCNG Patterns defined in A.3.2.1.1		Config 1	OP.1		OP.1	
PDSCH Reference measurement channel		Config 1	SR.3.1 TDD		-	
CORESET Reference Channel		Config 1	CR.3.1 TDD		-	
SMTC configuration defined in A.3.11.1 and A.3.11.2		Config 1	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1	120		120	
TRS configuration		Config 1	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI state		Config 1	TCI.State.2		N/A	
EPRE ratio of PSS to SSS		Config 1	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15 kHz Note5		-104.7		-104.7	
N_{oc} Note2	dBm/SCS Note4	Config 1	-95.7		-95.7	
SS-RSRP Note 3	dBm/SCS Note5	Config 1	-89.7	-89.7	-Infinity	-86.7
$\hat{E}_s / I_{ot}$	dB	Config 1	6	6	-Infinity	9
$\hat{E}_s / N_{oc}$	dB	Config 1	6	6	-Infinity	9
Io Note3	dBm/95.04 MHz Note5	Config 1	-59.7	-59.7	-66.7	-57.2
Propagation Condition		Config 1	AWGN		AWGN	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Void
Note 5:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6:	As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.17.6.2.4.2 Test Requirements

In test 1 the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X1 ms from the beginning of time period T2, where X1 is

10080 for UE supporting power class 1, or

6240 for UE supporting other power class.

In test 1 UE is required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.17.6.3 L1-RSRP measurement for beam reporting

A.17.6.3.1 SSB based L1-RSRP measurement when DRX is not used

A.17.6.3.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5B.4.1, with the testing configurations for NR cells in Table A.7.6.3.1.1-1.

The AoA setup for this test is Setup 1 as defined in clause A.3.15

A.17.6.3.1.2 Test parameters

Test parameters are the same as in clause A.7.6.3.1.2.

A.17.6.3.1.3 Test Requirements

The UE shall send L1-RSRP report every 320 slots. No later than X ms plus 320 slots from the beginning of time period T2, UE shall send L1-RSRP report including the results for both SSB#0 and SSB#1 while meeting the accuracy requirements defined in clause [10.xx.xx.1], where X is

- 1680 for UE supporting power class 1 or 5.
- 1200 for UE supporting power class 2,3, 4 or 7.

The reported L1-RSRP value shall include the Rx antenna gain in the range of -10 to +20 dB.

The rate of correct events observed during repeated tests shall be at least 90%.

A.17.6.3.2 SSB based L1-RSRP measurement when DRX is used

A.17.6.3.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5B.4.1, with the testing configurations for NR cells in Table A.17.6.3.2.1-1.

The AoA setup for this test is Setup 1 as defined in clause A.3.15

Table A.17.6.3.2.1-1: Applicable NR configurations for FR2 SSB based L1-RSRP test

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.17.6.3.2.2 Test parameters

There is one cells in the test, the FR2 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.17.6.3.2.2-1 and Table A.17.6.3.2.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.17.6.3.2.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~2		freq1
Duplex mode	1~2		TDD
TDD Configuration	1~2		TDDConf.3.1
$BW_{channel}$	1~2	MHz	100: $N_{RB,c}$ = 66
Data RBs allocated	1~2		66
PDSCH Reference measurement channel	1		SR.3.2 TDD
	2		SR.3.3 TDD
RMSI CORESET Reference Channel	1		CR.3.1 TDD
	2		CR.3.2 TDD
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD
	2		CCR.3.7 TDD
SSB configuration	1		SSB.1 FR2
	2		SSB.2 FR2
OCNG Patterns	1~2		OP.1
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~2		DLBWP.1.3 ULBWP.1.3
SMTC configuration	1~2		SMTC.1
TRS Configuration	1~2		TRS.2.1 TDD

PDCCH/PDSCH TCI Configuration	1~2		TCI.State.2
DRX configuration	1~2		DRX.3
reportConfigType	1~2		periodic
reportQuantity	1~2		ssb-Index-RSRP
Number of reported RS	1~2		2
L1-RSRP reporting period	1~2	slot	320
T1	1~2	s	5
T2	1~2	s	3
EPRE ratio of PSS to SSS	1~2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~2		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.17.6.3.2.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
Angle of arrival configuration			Setup 1 according to A.3.15.1			
Beam Assumption Note 4	1-2		Rough			
N_{oc} Note2	1~2	dBm/15kHz	-105			
N_{oc} Note2	1	dBm/SSB SCS	-96			
	2		-93			
$\hat{E}_s / I_{ot}$	1~2	dB	0	0	-Infinity	9
SSB_RP Note3	1	dBm/SSB SCS	-96	-96	-Infinity	-87
	2		-93	-93	-Infinity	-84
Io Note3	1	dBm/95.04MHz	-63.97	-63.97	-66.98	-57.47
	2		-63.97	-63.97	-66.98	-57.47
$\hat{E}_s / N_{oc}$	1~2	dB	0	0	-Infinity	9

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3:	SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.17.6.3.2.3 Test Requirements

The UE shall send L1-RSRP report every 320 slots. No later than X ms plus 320 slots from the beginning of time period T2, UE shall send L1-RSRP report including the results for both SSB#0 and SSB#1 while meeting the accuracy requirements defined in clause 10.1.20.1, where X is

- 2880 for UE supporting power class 1
- 1920 for UE supporting power class 2,3 or 4.

The reported L1-RSRP value shall include the Rx antenna gain in the range of -10 to +20 dB.

The rate of correct events observed during repeated tests shall be at least 90%.

A.17.6.3.3 CSI-RS based L1-RSRP measurement when DRX is not used

A.17.6.3.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5B.4.2, with the testing configurations for NR cells in Table A.17.6.3.3.1-1.

Table A.17.6.3.3.1-1: Applicable NR configurations for FR2 CSI-RS based L1-RSRP test

Config	Description
1	NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.17.6.3.3.2 Test parameters

There is one cells in the test, the FR2 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.17.6.3.3.2-1 and Table A.17.6.3.3.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the CSI-RS and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-RSRP on aperiodic CSI-RS resources. UE is also configured to measure L1-RSRP based on SSB. After 480ms from the beginning of the test, the DCI trigger comes in slot 1 of a frame and UE provides the report back based on the reporting configuration as defined in Table A.17.6.3.3.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs.

Table A.17.6.3.3.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1		freq1
Duplex mode	1		TDD
TDD Configuration	1		TDDConf.3.1
$BW_{channel}$	1	MHz	100: $N_{RB,c}$ = 66
PDSCH Reference measurement channel	1		SR.3.1 TDD

RMSI CORESET Reference Channel	1		CR.3.1 TDD
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD
SSB configuration	1		SSB.1 FR2
CSI-RS configuration	1		CSI-RS.3.3 TDD
OCNG Patterns	1		OP.1
Initial BWP Configuration	1		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1		SMTC.1
TRS Configuration	1		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1		TCI.State.2
DRX configuration	1		Off
reportConfigType	1		aperiodic
reportQuantity	1		cri-RSRP
Number of reported RS	1		2
qcl-Info	1		SSB#0 for resource#0 SSB#1 for resource#1
reportSlotOffsetList	1		8
Propagation condition	1		AWGN
T1	1	s	5
EPRE ratio of PSS to SSS	1	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.17.6.3.3.2-1: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
Angle of arrival configuration	1		Setup 1 according to A.3.15.1	
Beam Assumption Note 4	1		Rough	Rough
N_{oc} Note1	1	dBm/15kHz	-105	
N_{oc} Note1	1	dBm/SSB SCS	-95.97	
$\hat{E}_s / I_{ot}$	1	dB	0	9

CSI-RS RSRP Note2	1	dBm/SSB SCS	-95.97	-86.97
Io Note2	1	dBm/95.04MHz	-63.97	-57.47
$\hat{E}_s / N_{oc}$	1	dB	0	9
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.17.6.3.3.3 Test Requirements

After 480ms from the beginning of the test, the UE shall send L1-RSRP report at slot 8 from the reception of DCI triggering the L1-RSRP measurement. The L1-RSRP report shall include the results for both CSI-RS#0 and CSI-RS#1 while meeting the accuracy requirements defined in clause 10.1.20.1. The reported L1-RSRP value shall include the Rx antenna gain in the range of [-10 ~ +20] dB.

For absolute accuracy of CSI-RS0 and absolute accuracy of CSI-RS1, the UE is deemed to meet the requirement if the reported L1-RSRP is in the range shown in Table A.17.6.3.3.3-1.

For relative accuracy of CSI-RS0 compared with CSI-RS1, the UE is deemed to meet the requirement if the difference in reported L1-RSRP meets the requirements in Table 10.1.20.2.2-1.

Table A.17.6.3.3.3-1: L1-RSRP absolute accuracy test requirement

	Test requirement Notes1,2,3
CSI-RS0	CSI-RS _RP0 -δ + G_{min} ≤ Reported RSRP(dBm) ≤CSI-RS _RP0 +δ + G_{max}
CSI-RS1	CSI-RS _RP1 -δ + G_{min} ≤ Reported RSRP(dBm) ≤CSI-RS _RP1 +δ + G_{max}
Note 1: CSI-RS_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the CSI-RS n under consideration	
Note 2: δ is the RSRP absolute accuracy requirement from Table 10.1.20.2.1-1, selected according to the Io used in the test	
Note 3: G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class	

A.17.6.3.4 CSI-RS based L1-RSRP measurement when DRX is used

A.17.6.3.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5B.4.2, with the testing configurations for NR cells in Table A.17.6.3.4.1-1.

Table A.17.6.3.4.1-1: Applicable NR configurations for FR2 CSI-RS based L1-RSRP test

Config	**Description**
1	NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.17.6.3.4.2 Test parameters

There is one cells in the test, the FR2 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.17.6.3.4.2-1 and Table A.17.6.3.4.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the CSI-RS and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-RSRP on aperiodic CSI-RS resources. UE is also configured to measure L1-RSRP based on SSB. After 1440ms from the beginning of the test, the DCI trigger comes in slot 1 of a frame and UE provides the report back based on the reporting configuration as defined in Table A.17.6.3.4.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs.

Table A.17.6.3.4.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1		freq1
Duplex mode	1		TDD
TDD Configuration	1		TDDConf.3.1
$BW_{channel}$	1	MHz	100: $N_{RB,c}$ = 66
PDSCH Reference measurement channel	1		SR.3.1 TDD
RMSI CORESET Reference Channel	1		CR.3.1 TDD
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD
SSB configuration	1		SSB.1 FR2
CSI-RS configuration	1		CSI-RS.3.3 TDD
OCNG Patterns	1		OP.1
Initial BWP Configuration	1		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1		SMTC.1
TRS Configuration	1		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1		TCI.State.2
DRX configuration	1		DRX.3
reportConfigType	1		aperiodic
reportQuantity	1		cri-RSRP
Number of reported RS	1		2
qcl-Info	1		SSB#0 for resource#0 SSB#1 for resource#1
reportSlotOffsetList	1		8
Propagation condition	1		AWGN
T1	1	s	5
EPRE ratio of PSS to SSS	1	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Table A.17.6.3.4.2-1: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
Angle of arrival configuration	1		Setup 1 according to A.3.15.1	
Beam Assumption Note 4	1		Rough	Rough
N_{oc} Note1	1	dBm/15kHz	-105	
N_{oc} Note1	1	dBm/SSB SCS	-95.97	
$\hat{E}_s / I_{ot}$	1	dB	0	9
CSI-RS RSRP Note2	1	dBm/SSB SCS	-95.97	-86.97
Io Note2	1	dBm/95.04MHz	-63.97	-57.47
$\hat{E}_s / N_{oc}$	1	dB	0	9

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.6.3.3.3 Test Requirements

After 1440ms from the beginning of the test, the UE shall send L1-RSRP report at slot 8 from the reception of DCI triggering the L1-RSRP measurement. The L1-RSRP report shall include the results for both CSI-RS#0 and CSI-RS#1 while meeting the accuracy requirements defined in clause 10.1.20.1. The reported L1-RSRP value shall include the Rx antenna gain in the range of [-10 ~ +20] dB.

For absolute accuracy of CSI-RS0 and absolute accuracy of CSI-RS1, the UE is deemed to meet the requirement if the reported L1-RSRP is in the range shown in Table A.17.6.3.4.3-1.

For relative accuracy of CSI-RS0 compared with CSI-RS1, the UE is deemed to meet the requirement if the difference in reported L1-RSRP meets the requirements in Table 10.1.20.2.2-1.

Table A.17.6.3.4.3-1: L1-RSRP absolute accuracy test requirement

	Test requirement Notes1,2,3
CSI-RS0	CSI-RS _RP0 -δ + G_{min} ≤ Reported RSRP(dBm) ≤CSI-RS _RP0 +δ + G_{max}
CSI-RS1	CSI-RS _RP1 -δ + G_{min} ≤ Reported RSRP(dBm) ≤CSI-RS _RP1 +δ + G_{max}

Note 1: CSI-RS_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the CSI-RS n under consideration

Note 2: δ is the RSRP absolute accuracy requirement from Table 10.1.20.2.1-1, selected according to the Io used in the test

Note 3: G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class

A.17.6.4 NR Measurements with autonomous gaps

A.17.6.4.1 SA interfrequency CGI reporting in autonomous gaps test (PCell in FR2) for 2 RX UE

A.17.6.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an CGI. This test will partly verify the SA inter-frequency NR cell search requirements in clause 8.2.1.2.16 and 9.11

In this test, there are two cells: NR cell 1 as PCell in FR2 on NR RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.17.6.4.1.1-1, A.17.6.4.1.1-2, and A.17.6.4.1.1-3.

Measurement gap patterns are configured. During T1 the UE shall report event A3 for cell 2. Within 3 seconds of the event report, the test equipment shall add a measurement reporting configuration using *ReportConfigNR* which containsa ReportCGI IE with cellForWhichToReportCGI set to the physical Cell ID of cell 2 and including the optional IE useAutonomousGaps-r16

In the measurement control information, it is indicated to the UE to decode the CGI of the neighbour cell using autonomous gaps. The test consists of two time phases, T1 and T2. Time period T2 begins 10ms after the test equipment has transmitted the RRC reconfiguration message containing the ReportCGI IE.

Supported test configurations are shown in table A.17.6.4.1.1-1.

Table A.17.6.4.1.1-1 SA interfrequency CGI reporting test in autonomous gaps

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.17.6.4.1.1-2: General test parameters for SA interfrequency CGI reporting in autonomous gaps

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1, 2	Two FR2 NR carrier frequencies is used.
Active cell		Config 1	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1	NR cell 2	NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1	13	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	39	
SMTC-SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
SI-RNTI scheduling rate	ms		40 ms	S-RNTI scheduled on four occasions per 160ms transmission period
A3-Offset	dB	Config 1	-30	

Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX		Config 1	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3μs	Synchronous cells.
T1	s	Config 1	<10	UE expected to report event A3 for cell 2 within 5,2s (PC1)or 3.5s (other PC) of the start of T1. Test equipment shall configure CGI reporting within 3s after receiving the event A3 report. T2 begins 10ms after test equipment has transmitted the RRC reconfiguration to configure CGI reporting.
T2	s	Config 1	1	

Table A.17.6.4.1.1-3: Cell specific test parameters SA interfrequency CGI reporting in autonomous gaps

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1	Setup 3 as specified in clause A.3.15			
				AoA1		AoA2	
Beam Assumption[Note 7]			1,2	Rough			
NR RF Channel Number			Config 1	1		2	
Duplex mode			Config 1	TDD		TDD	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP BW		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		Not sent	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120	
TRS configuration			Config 1	TRS.2.1 TDD		N/A	
TCI configuration			Config 1	CSI-RS.Config.0		N/A	

EPRE ratio of PSS to SSS		Config 1	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	dBm/15 kHz Note5		-99.03	-99.03
N_{oc} Note2	dBm/SCS Note4	Config 1	-90	-90
SS-RSRP Note 3	dBm/SCS Note5	Config 1	-87	-93
$\hat{E}_s/I_{ot}$	dB	Config 1	3	-3
$\hat{E}_s/N_{oc}$	dB	Config 1	3	-3
Io Note3	dBm/95.04 MHz Note5	Config 1	-56.25	-59.25
Propagation Condition		Config 1	AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone

Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone

Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.17.6.4.1.2 Test Requirements

The UE shall report the CGI of cell 2 within 25*Tsmtc + 6*Tsi-rnti+20ms +2ms= 762ms from the start of T2, allow 765ms. The rate of correct events observed during repeated tests shall be at least 90%.

The UE shall be scheduled continuously throughout the test, and from the start of T3 until 775 ms the number of interrupted slots shall not exceed the allowed number as defined in clause 8.2.2.2.14.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.17.7 Measurement Performance requirements

A.17.7.1 SS-RSRP

A.17.7.1.1 SA intra-frequency case measurement accuracy with FR2 serving cell and FR2 target cell

A.17.7.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy for RedCap UE is within the specified limits. This test will verify the requirements in clauses 10.1.3A.3 for intra-frequency measurements.

A.17.7.1.1.2 Test parameters

In this set of test cases all cells are on the same carrier frequency. Supported test configurations are shown in Table A.17.7.1.1.2-1. Both absolute and relative accuracy of SS-RSRP intra-frequency measurements are tested by using the parameters in Table A.17.7.1.1.2-2 and A.17.7.1.1.2-3. In all test cases, Cell 1 is the PCell and Cell 2 the target cell. The TCI status for Cell 1 is defined in Table A.3.16.2-1 and TRS configuration for Cell 1 is defined in Table A.3.17.2.1-1. The test consists of two time phases T1 and T2.

Table A.17.7.1.1.2-1: SS-RSRP Intra frequency SS-RSRP supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.17.7.1.1.2-2: SS-RSRP Intra frequency general test parameters

Parameter	Unit	T1		T2	
		Cell 1	Cell 2	Cell 1	Cell 2
Cell ID		489	0	489	0
SSB ARFCN		freq1		freq1	
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		24		24	
Downlink initial BWP configuration		DLBWP.0.1	-	DLBWP.0.1	-
Downlink dedicated BWP configuration		DLBWP.1.1	-	DLBWP.1.1	-
Uplink initial BWP configuration		ULBWP.0.1	-	ULBWP.0.1	-
Uplink dedicated BWP configuration		ULBWP.1.1	-	ULBWP.1.1	-
DRX cycle configuration		Not applicable	-	Not applicable	-
TRS configuration		TRS.2.1 TDD	-	TRS.2.1 TDD	-
TCI state		TCI.State.0	-	TCI.State.0	-

PDSCH Reference measurement channel		SR.3. 2TDD	-	SR.3. 2 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-
Dedicated CORESET Reference channel		CCR.3. 1 TDD	-	CCR.3 .1 TDD	-
OCNG Patterns		OP.3	OP.3	OP.3	OP.3
SSB configuration		SSB.3 FR2	SSB. 3 FR2	SSB.3 FR2	SSB.3 FR2
SMTC configuration		SMTC. 1	SMT C.1	SMTC. 1	SMTC .1
Time offset with Cell 1	μs	-	3	-	3
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
Propagation conditions		AWGN	AWG N	AWGN	AWG N
Antenna configuration		1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Void Note 3: Void Note 4: Void Note 5: Void					

Table A.17.7.1.1.2-3: SS-RSRP Intra frequency OTA related test parameters

Parameter	Unit	T1		T2	
		Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1			
Assumption for UE beams Note 7		Rough		Rough	
N_{oc} Note1	dBm/15kHz Note4	-91.6		N/A	
N_{oc} Note1	dBm/SCS Note4	-82.6		N/A	
$\hat{E}_s / N_{oc}$	dB	6.0	1.0	N/A	N/A
E_s	dBm/SCS Note4			(Table B.2.2-2	(Table B.2.2-2

				Rx Beam Peak +2.1dB)	Rx Beam Peak +2.1dB)
SSB_RP Note2	dBm/SCS	-76.6	-81.6	(Table B.2.2-2 Rx Beam Peak +2.1dB)	(Table B.2.2-2 Rx Beam Peak +2.1dB)
$\hat{E}_s/I_{ot}$ BB Note6	dB	2.44	-5.98	-5.98	-5.98
Io Note2	dBm/95.04 MHz Note4	-50.05		(Table B.2.2-2 Rx Beam Peak +29.70dB)	

Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SSB_RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: Void
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5: Void
Note 6: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.17.7.1.1.3 Test Requirements

The SS-RSRP measurement accuracy shall fulfil the absolute accuracy requirements in clauses 10.1A.3.1.1 and relative accuracy requirements in clause 10.1A.3.1.2. The following requirements are to be verified:

During T1:

Absolute accuracy of Cell 1 and absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in table A.17.7.1.1.3-1.

Relative accuracy of Cell 2 compared with Cell 1. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in Table 10.1A.3.1.2-1.

During T2:

Absolute accuracy of Cell 1 and absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in table A.17.7.1.1.3-1.

Relative accuracy of Cell 2 compared with Cell 1. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in Table 10.1A.3.1.2-1.

During T1 and T2:

Relative accuracy of Cell 1 during T2 compared with Cell 1 during T1. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in Table 10.1A.3.1.2-1

Relative accuracy of Cell 2 during T2 compared with Cell 2 during T1. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in Table 10.1A.3.1.2-1.

Table A.17.7.1.1.3-1: SS-RSRP absolute accuracy test requirement

	Test requirement Notes1,2,3
Cell 1	SSB_RP1 -δ +G_{min} ≤ Reported RSRP(dBm) ≤ SSB_RP1 +δ +G_{max}
Cell 2	SSB_RP2 -δ +G_{min} ≤ Reported RSRP(dBm) ≤ SSB_RP2 +δ +G_{max}
Note 1:	SSB_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration
Note 2:	δ is the RSRP absolute accuracy requirement from Table 10.1.3.1.1-1, selected according to the Io used in the test
Note 3:	G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class

A.17.7.1.2 SA inter-frequency case measurement accuracy with FR2 serving cell and FR2 target cell

A.17.7.1.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1A.5.1.1 and 10.1.5A.1.2 for intrer-frequency measurements with the testing configurations for NR cells in Table A.17.7.1.2.1-1.

Table A.17.7.1.2.1-1: Applicable NR configurations for FR2 inter-frequency SS-RSRP accuracy test

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

A.17.7.1.2.2 Test parameters

In this set of test cases there are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on a different frequency than the PCell. The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 1 and Cell 2 are given in Table A.17.7.1.2.2-1 and Table A.17.7.1.2.2-2 below. Both absolute and relative accuracy of RSRP inter-frequency measurements are tested by using the parameters in A.17.7.1.2.2-1

The inter-frequency measurements are supported by a measurement gap.

Table A.17.7.1.2.2-1: SS-RSRP inter-frequency test parameters

Parameter		Config	Unit	Test 1		Test 2	
				Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN		1~2		freq1	freq2	freq1	freq2
$BW_{channel}$		1~2		100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		1		24		24	
		2		48		48	
Gap pattern ID				0		0	
Duplex mode		1~2		TDD		TDD	
TDD configuration		1~2		TDDConf.3.1		TDDConf.3.1	
PDSCH Reference measurement channel		1		SR.3. 2 TDD	-	SR.3. 2 TDD	-
		2		SR.3.3 TDD		SR.3.3 TDD	
RMSI CORESET Reference Channel		1		CR.3.1 TDD	-	CR.3.1 TDD	-
		2		CR.3.2 TDD		CR.3.2 TDD	
Dedicated CORESET Reference Channel		1		CCR.3.1 TDD	-	CCR.3.1 TDD	-
		2		CCR.3.7 TDD		CCR.3.7 TDD	
SSB configuration		1		SSB.3 FR2		SSB.3 FR2	
		2		SSB.4 FR2		SSB.4 FR2	

PDSCH/PDCCH subcarrier spacing		1~2	kHz	120		120	
OCNG Patterns		1~2		OP.3		OP.3	
Initial BWP Configuration		1~2		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration		1~2		DLBWP.1.3 ULBWP.1.3		DLBWP.1.3 ULBWP.1.3	
TRS Configuration		1~2		TRS.2.1 TDD		TRS.2.1 TDD	
PDCCH/PDSCH TCI Configuration		1~2		TCI.State.2		TCI.State.2	
SMTC configuration		1~2		SMTC.1		SMTC.1	
Time offset between Cell 2 and Cell 1		1~2	µs	3		3	
EPRE ratio of PSS to SSS		1~2	dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH DMRS							
EPRE ratio of OCNG DMRS to SSS Note 1							
EPRE ratio of OCNG to OCNG DMRS Note 1							
Propagation condition		1~2	-	AWGN	AWGN	AWGN	AWGN
Antenna configuration		1~2	-	1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: Void.							

Table A.17.7.1.2.2-2: SS-RSRP inter frequency OTA related test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration	1~2		Setup 4b according to clause A.3.15.4.2		Setup 4b according to clause A.3.15.4.2	
			AoA1 Spherical coverage	AoA2 Rx Beam Peak	AoA1 Spherical coverage	AoA2 Rx Beam Peak
Assumption for UE beams Note 7	1~2		Rough		Rough	
N_{oc} Note1	1	dBm/15kHz Note4	-90.6	-90.6	(Table B.2.3-2 Rx Beam Peak Note 8 +1.97dB)	(Table B.2.3-2 Rx Beam Peak Note 8 -3.03dB)
	2		-93.7	-93.7		
N_{oc} Note1	1	dBm/SCS Note4	-81.6	-81.6	(Table B.2.3-2 Rx Beam Peak Note 8 +11.0dB)	(Table B.2.3-2 Rx Beam Peak Note 8 +6.0dB)
	2		-81.7	-81.7	(Table B.2.3-2 Rx Beam	(Table B.2.3-2 Rx Beam

					Peak[Note 8] +14.0dB)	Peak[Note 8] +9.0dB)
$\hat{E}_s / N_{oc}$	1~2	dB	6.0	6.0	17.0	-1.0
SSB_RP[Note2]	1	dBm/SCS	-75.6	-75.6	(Table B.2.3-2 Rx Beam Peak[Note 8] +28.0dB)	(Table B.2. 3-2 Rx Beam Peak[Note 8] +5.0dB)
	2		-75.7	-75.7	(Table B.2.3-2 Rx Beam Peak[Note 8] +31.0dB)	(Table B.2. 3-2 Rx Beam Peak[Note 8] +8.0dB)
($SSB_RP_{Cell\ 1}$ – $SSB_RP_{Cell\ 2}$)	1~2	dB	0		23.00	
$\hat{E}_s / I_{ot\ BB}$[Note6]	1	dB	5.26	5.96	9.53	-3.46
	2		4. 61	5.91		
Io[Note2]	1	dBm/95.04 MHz [Note4]	-50.00	-50.00	(Table B.2.3-2 Rx Beam Peak[Note 8] +52.68dB)	(Table B.2.3-2 Rx Beam Peak[Note 8] +33.13dB)
	2		-50.09	-50.09	(Table B.2.3-2 Rx Beam Peak[Note 8] +55.69dB)	(Table B.2.3-2 Rx Beam Peak[Note 8] +36.14dB)
($Io_{freq\ 1}$ – $Io_{freq\ 2}$)	1~2	dB	0		19.55	

Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 2: SSB_RP, Es/Iot, Io, ($SSB_RP_{Cell\ 2}$ – $SSB_RP_{Cell\ 1}$) and ($Io_{freq\ 2}$ – $Io_{freq\ 1}$) levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 3: Void

Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone

Note 5: Void

Note 6: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P or ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.

Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Note 8: The value in Table B.2.3-2 is the Minimum SSB_RP for SCS_{SSB} = 120 kHz, selected according to the operating band of Cell 2 and UE power class, without $\Delta MB_{P,n}$ adjustment.

A.17.7.1.2.3 Test Requirements

The SS-RSRP measurement accuracy for Cell 1 and Cell 2 shall fulfil the absolute requirements in clause 10.1A.5.1.1 and the relative requirements in clause 10.1.5A.1.2.

Test 1:

Absolute accuracy of Cell 1 and absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in Table A.17.7.1.2.3-1.

Relative accuracy of Cell 2 compared with Cell 1. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in Table A.17.7.1.2.3-2.

Test 2:

Absolute accuracy of Cell 1 and absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in Table A.17.7.1.2.3-1.

Relative accuracy of Cell 2 compared with Cell 1. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in Table A.17.7.1.2.3-2.

Table A.17.7.1.2.3-1: SS-RSRP absolute accuracy test requirement

	Test requirement Notes1,2,3,4
Cell 1	SSB_RP1 -δ +G_{min} +X ≤ Reported RSRP(dBm) ≤ SSB_RP1 +δ +G_{max}
Cell 2	SSB_RP2 -δ +G_{min} ≤ Reported RSRP(dBm) ≤ SSB_RP2 +δ +G_{max}
Note 1: SSB_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration	
Note 2: δ is the RSRP absolute accuracy requirement from Table 10.1.5.1.1-1, selected according to the Io used in the test	
Note 3: G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class	
Note 4: X is the Spherical coverage gain difference in dB, derived as (UE Refsens - UE Spherical coverage) from TS 38.101-2 [19] clauses 7.3.2 and 7.3.4, selected according to the UE power class and operating band. X is always a negative value.	

Table A.17.7.1.2.3-2: SS-RSRP relative accuracy test requirement

	Test requirement Notes1,2,3,4, 5, 6
Cell 2 – Cell 1	SSB_RP2 - SSB_RP1 -δ - D - G_{inter} ≤ Reported RSRP(dB) ≤ SSB_RP2 - SSB_RP1 +δ + G_{inter} –(X)
Note 1: SSB_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration	
Note 2: δ is the RSRP relative accuracy requirement from Table 10.1.5.1.2-1	
Note 3: Void	
Note 4: X is the Spherical coverage gain difference in dB, derived as (UE Refsens - UE Spherical coverage) from TS 38.101-2 [19] clauses 7.3.2 and 7.3.4, selected according to the UE power class and operating band. X is always a negative value.	
Note 5: D = [5.5dB]. D is the margin due to mis-alignment between fine beam and rough beam.	
Note 6: G_{inter} = [3dB]. G_{inter} is the margin due to different antenna gain caused by frequency separation.	

A.17.7.2 SS-RSRQ

A.17.7.2.1 SA intra-frequency measurement accuracy with FR2 serving cell and FR2 target cell

A.17.7.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1A.7.

A.17.7.2.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configurations are shown in Table A.17.7.2.1.2-1. . The absolute accuracy of SS-RSRQ intra-frequency measurement is test by using the parameters in Table A.17.7.2.1.2-2 and Table A.17.7.2.1.2-3. In all test cases, Cell 1 is the PCell and Cell 2 the target cell.

Table A.17.7.2.1.2-1: SS-RSRQ Intra frequency SS-RSRQ supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.17.7.2.1.2-2: SS-RSRQ Intra frequency test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			Freq1		Freq1	
Duplex mode			TDD		TDD	
TDD configuration			TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$		MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated			66		66	
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
TRS configuration			TRS.2.1 TDD		TRS.2.1 TDD	
TCI state			TCI.State.0		TCI.State.0	
PDSCH Reference measurement channel			SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET Reference Channel			CR.3.1 TDD	-	CR.3.1 TDD	
Control channel RMC			CCR.3.1 TDD	-	CCR.3.1 TDD	-
OCNG Patterns			OP.1	OP.1	OP.1	OP.1
SMTC configuration			SMTC.1			
SSB configuration			SSB.1 FR2	SSB.1 FR2	SSB.1 FR2	SSB.1 FR2
PDSCH/PDCCH subcarrier spacing		kHz	120	120	120	120
SS-RSSI-Measurement			Not Applicable			
EPRE ratio of PSS to SSS		dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						
EPRE ratio of PDCCH to PDCCH_DMRS						
EPRE ratio of PDSCH_DMRS to SSS						
EPRE ratio of PDSCH to PDSCH_DMRS						
EPRE ratio of OCNG DMRS to SSS Note 1						
EPRE ratio of OCNG to OCNG DMRS Note 1						
Propagation condition			AWGN		AWGN	
Antenna configuration			1x2	1x2	1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: Void
Note 4: Void
Note 5: Void.

Table A.17.7.2.1.2-3: SS-RSRQ Intra frequency OTA related test parameters

	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2

Angle of arrival configuration		Setup 1 according to clause A.3.15.1		Setup 1according to clause A.3.15.1	
Assumption for UE beams Note 9		Rough			
N_{OC} Note1	dBm/15kHz Note 4	-95		-95	
N_{OC} Note1	dBm/SCS Note3	-86		-86	
$\hat{E}_s / N_{oc}$	dB	3		3	
SSB_RP Note2	dBm/SCS Note4	-83	-83	-89	-89
SS-RSRQ Note2	dB	-14.77	-14.77	-16.81	-16.81
$\hat{E}_s / I_{ot}$	dB	-1.76	-1.76	-4.76	-4.76
Io Note2	dBm/95.04 MHz Note4	-50		-54	

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SS-RSRQ, SSB_RP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: SS-RSRQ and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6: Void
Note 7: Void
Note 8: Void
Note 9: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.17.7.2.1.3 Test Requirements

The SS-RSRQ absolute measurement accuracy in test 1shall be within the range Nominal SS-RSRQ+2.5dB to Nominal SS-RSRQ-2.5dB and the SS-RSRQ measurement accuracy in test 2 shall be within the range Nominal RSRQ+3.5dB to Nominal RSRQ-3.5dB according to the requirements in clause 10.1.8.1.1.Nominal RSRQ is the value shown in table A.17.7.2.1.2-3.

A.17.7.2.2 SA Inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell for 2 Rx UE

A.17.7.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1A.9.1.1 and 10.1A.9.1.2 for inter-frequency measurement.

A.17.7.2.2.2 Test parameters

In this test case the two cells (i.e., Cell 1 and Cell 2) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.17.7.2.2.2-1. Both absolute accuracy and relative accuracy requirements of SS-RSRQ inter-frequency measurement are tested by using test parameters in Table A.17.7.2.2.2-2 and Table A.17.7.2.2.2-3. In all test cases, Cell 1 is the PCell and Cell 2 is target cell.

Table A.17.7.2.2.2-1: SS-RSRQ Inter frequency SS-RSRQ supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.17.7.2.2.2-2: SS-RSRQ Inter frequency test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			Freq1	freq2	freq1	Freq2
SSB Configuration			SSB.1 FR2	SSB.1 FR2	SSB.1 FR2	SSB.1 FR2
Duplex mode			TDD		TDD	
TDD configuration			TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$		MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
TRS configuration			TRS.2.1 TDD	-	TRS.2.1 TDD	-
TCI state			TCI.State.0	-	TCI.State.0	-
Data RBs allocated			66		66	
PDSCH Reference measurement channel			SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel			CR.3.1 TDD	-	CR.3.1 TDD	-
OCNG Patterns			OP.1	OP.1	OP.1	OP.1
SMTC configuration			SMTC.1 FR2	SMTC.1 FR2	SMTC.1 FR2	SMTC.1 FR2
PDSCH/PDCCH subcarrier spacing		kHz	120	120	120	120
EPRE ratio of PSS to SSS		dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						
EPRE ratio of PDCCH to PDCCH_DMRS						
EPRE ratio of PDSCH_DMRS to SSS						
EPRE ratio of PDSCH to PDSCH_DMRS						
EPRE ratio of OCNG DMRS to SSS Note 1						
EPRE ratio of OCNG to OCNG DMRS Note 1						
Propagation conditions			AWGN	AWGN	AWGN	AWGN
Antenna configuration			1x2	1x2	1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: Void
Note 4: Void

Table A.17.7.2.2.2-3 SS-RSRQ Inter frequency OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
AoA setup		Setup 1 in clause A.3.15.		Setup 1 in clause A.3.15.	
Assumption for UE beams Note 8		Rough		Rough	
N_{oc} Note1	dBm/15kHz Note4	-94.03	-94.03	-94.03	-94.03
N_{oc} Note1	dBm/SCS Note3	-85.0	-85.0	-85.0	-85.0
$\hat{E}_s / N_{oc}$	dB	-1.75		-1.75	

SSB_RP[Note2]	dBm/SCS Note4	-86.75	-86.75	-88	-88
SS-RSRQ[Note2]	dB	-14.75	-14.75	-15.56	-15.56
$\hat{E}_s / I_{ot}$	dB	-1.75	-1.75	-3	-3
Io[Note2]	dBm/95.04 MHz Note4	-53.8	-53.8	-54.25	-54.25

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SS-RSRQ, SSB_RP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: SS-RSRQ and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6: Void
Note 7: Void
Note 8: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.17.7.2.2.3 Test Requirements

The SS-RSRQ absolute measurement accuracy in test 1 shall be within the range Nominal SS-RSRQ+2.5dB to Nominal SS-RSRQ -2.5dB and the SS-RSRQ measurement accuracy in test 2 shall be within the range Nominal SS-RSRQ +3.5dB to Nominal SS-RSRQ -3.5dB according to the requirements in clause 10.1A.10.1.1.

The SS-RSRQ relative measurement accuracy shall fulfil the requirements in clause 10.1A.10.1.2.

A.17.7.2.3 SA Inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell

A.17.7.3 L1-RSRP measurement for beam reporting

A.17.7.3.1 SSB based L1-RSRP measurement

A.17.7.3.1.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 9.5B.2 and clause [10.xx.xx.1] for L1-RSRP measurements based on SSB with the testing configurations for NR cells in Table A.7.7.4.1.1-1.

The AoA setup for this test is Setup 1 as defined in clause A.3.15.

A.17.7.3.1.2 Test parameters

Test parameters are the same as in clause A.7.7.4.1.2.

A.17.7.3.1.3 Test Requirements

After 320ms from the beginning of the test, the L1-RSRP measurement accuracy for SSB#0 and SSB#1 of Cell 2 shall fulfil the requirements in clauses [10.xx.xx.1]. The following requirements are to be verified:

For Test 1:

Absolute accuracy of SSB0 and absolute accuracy of SSB1. The UE is deemed to meet the requirement if the reported L1-RSRP is in the range shown in Table A.17.7.3.1.3-1.

Relative accuracy of SSB0 compared with SSB1. The UE is deemed to meet the requirement if the difference in reported L1-RSRP meets the requirements in Table [10.xx.xx.1.2-1].

For Test 2:

Absolute accuracy of SSB0 and absolute accuracy of SSB1. The UE is deemed to meet the requirement if the reported L1-RSRP is in the range shown in Table A.17.7.3.1.3-1.

Relative accuracy of SSB0 compared with SSB1. The UE is deemed to meet the requirement if the difference in reported L1-RSRP meets the requirements in Table [10.xx.xx.1.2-1].

Table A.17.7.3.1.3-1: L1-RSRP absolute accuracy test requirement

	Test requirement Notes1,2,3
SSB0	SSB_RP0 -δ + G_{min} ≤ Reported RSRP(dBm) ≤ SSB_RP0 +δ + G_{max}
SSB1	SSB_RP1 -δ + G_{min} ≤ Reported RSRP(dBm) ≤ SSB_RP1 +δ + G_{max}
Note 1:	SSB_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the SSB n under consideration
Note 2:	δ is the RSRP absolute accuracy requirement from Table [10.xx.xx.1.1-1], selected according to the Io used in the test
Note 3:	G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class

A.17.7.3.2 CSI-RS based L1-RSRP measurement on resource set with repetition off

A.17.7.3.2.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 9.5.3 and clause [10.1.xx.2] for L1-RSRP measurements based on CSI-RS with the testing configurations for NR cells in Table A.7.7.4.2.1-1.

The AoA setup for this test is Setup 1 as defined in clause A.3.15.

A.17.7.3.2.2 Test parameters

Test parameters are the same as in clause A.7.7.4.2.2.

A.17.7.3.2.3 Test Requirements

After 640ms from the beginning of the test, the L1-RSRP measurement accuracy for CSI-RS#0 and CSI-RS#1 of Cell 1 shall fulfil the requirements in clause [10.1.xx.2]. The following requirements are to be verified:

For Test 1:

Absolute accuracy of CSI-RS0 and absolute accuracy of CSI-RS1. The UE is deemed to meet the requirement if the reported L1-RSRP is in the range shown in Table A.17.7.3.2.3-1.

Relative accuracy of CSI-RS0 compared with CSI-RS1. The UE is deemed to meet the requirement if the difference in reported L1-RSRP meets the requirements in Table [10.1.xx.2.2-1].

For Test 2:

Absolute accuracy of CSI-RS0 and absolute accuracy of CSI-RS1. The UE is deemed to meet the requirement if the reported L1-RSRP is in the range shown in Table A.17.7.3.2.3-1.

Relative accuracy of CSI-RS0 compared with CSI-RS1. The UE is deemed to meet the requirement if the difference in reported L1-RSRP meets the requirements in Table [10.1.xx.2.2-1].

Table A.17.7.3.2.3-1: L1-RSRP absolute accuracy test requirement

	Test requirement Notes1,2,3
CSI-RS0	CSI-RS _RP0 -δ + G_{min} ≤ Reported RSRP(dBm) ≤CSI-RS _RP0 +δ + G_{max}
CSI-RS1	CSI-RS _RP1 -δ + G_{min} ≤ Reported RSRP(dBm) ≤CSI-RS _RP1 +δ + G_{max}
Note 1: CSI-RS_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the CSI-RS n under consideration	
Note 2: δ is the RSRP absolute accuracy requirement from Table [10.1.xx.2.1-1], selected according to the Io used in the test	
Note 3: G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class	

A.17.7.4 SS-SINR

A.17.7.4 SA intra-frequency case measurement accuracy with FR2 serving cell and FR2 target cell for 2Rx UE

A.17.7.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1A.13.1.1.

A.17.7.4.1.2 Test parameters

In this test case all cells are on the same carrier frequency. Supported test configurations are shown in Table A A.17.7.4.1.2-1. The absolute accuracy of SS-SINR intra-frequency measurement is test by using the parameters in Table A.17.7.4.1.2-2 and Table Table A.17.7.4.1.2-3. In all test cases, Cell 1 is the PCell and Cell 2 the target cell. The TCI status for Cell 1 is defined in Table A.3.16.2-1 and TRS configuration for Cell 1 is defined in Table A.3.17.2.1-1.

Table A.17.7.4.1.2-1: SS-SINR Intra frequency SS-SINR supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.17.7.4.1.2-2: SS-SINR Intra frequency test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN		Freq2		Freq2	
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		66		66	
Downlink initial BWP configuration		DLBWP.0.1			
Downlink dedicated BWP configuration		DLBWP.1.1			
Uplink initial BWP configuration		ULBWP.0.1			
Uplink dedicated BWP configuration		ULBWP.1.1			
DRX cycle configuration	ms	Not applicable			
TRS configuration		TRS.2.1 TDD			

TCI state		TCI.State.0			
PDSCH Reference measurement channel		SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	
Dedicated RMSI CORESET Reference Channel		CCR.3.1 TDD	-	CCR.3.1 TDD	-
OCNG Patterns		OP.1	OP.1	OP.1	OP.1
SMTC configuration		SMTC.1			
SSB configuration		SSB.1 FR2	SSB.1 FR2	SSB.1 FR2	SSB.1 FR2
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
SS-RSSI-Measurement		Not Applicable			
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
Propagation conditions		AWGN			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Void Note 3: Void Note 4: Void					

Table A.17.7.4.1.2-3: SS-SINR Intra frequency OTA related test parameters

Parameter	Unit	Test 1		Test 3	
		Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1		Setup 1 according to clause A.3.15.1	
Assumption for UE beams Note 9		Rough		Rough	
N_{oc} Note1	dBm/15kHz Note4	-105		-105	
N_{oc} Note1	dBm/SCS Note3	-96		-96	
$\hat{E}_s / N_{oc}$	dB	4.54		2.66	
SSB_RP Note2	dBm/SCS Note4	-91.46	-93.34	-99	-99
SS-SINR Note2	dB	0	-3.2	-4.76	-4.76
$\hat{E}_s / I_{ot}$	dB	0	-3.2	-4.76	-4.76
Io Note2	dBm/95.04 MHz Note4	-59.2		-64	
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: SS-SINR, SSB_RP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: SS-SINR and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone					

Note 6:	Void
Note 7:	Void
Note 8:	Void
Note 9:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.17.7.4.1.3 Test Requirements

The SS-SINR absolute measurement accuracy in test 1 shall be within the range Nominal SS-SINR+3B to Nominal SS-SINR -3dB and the SS-SINR measurement accuracy in test 2 shall be within the range Nominal SS-SINR +3.5dB to Nominal SS-SINR -3.5dB according to the requirements in clause 10.1A.10.13.1.

A.18 E-UTRA standalone tests for NR RRM for RedCap

A.18.1 RRC_IDLE state mobility

A.18.1.1 Inter-RAT NR Cell re-selection

A.18.1.1.1 E-UTRA Cell reselection to higher priority NR target Cell in FR1

A.18.1.1.1.1 Test Purpose and Environment

This test is to verify the requirement for the E-UTRAN to NR inter-RAT cell reselection requirements specified in clause 4.2.2.5.8 in TS 36.133 [15].

The test scenario comprises of 1 E-UTRA cell and 1 NR cell as given in tables A.18.2.1.1.1-1, A.18.2.1.1.1-2, A.18.2.1.1.1-3 and A.18.2.1.1.1-4. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. E-UTRA cell 1 is already identified by the UE prior to the start of the test. Cell 2 is of higher priority than cell 1.

Table A.18.2.1.1.1-1: Supported test configurations

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
7	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
8	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.18.2.1.1.1-2: General test parameters for E-UTRA cell re-selection FR1 NR cell test case

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell2	The UE camps on cell 2 in the initial phase
	Neighbour cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	
T1 end condition	Active cell			Cell1	During T1 period the UE reselects to cell 1

	Neighbour cell			Cell2	
T3 end condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell2	The UE shall perform reselection to cell 2 during T3
	Neighbour cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	
RF Channel Number			1, 2, 3, 4, 5, 6, 7, 8	1, 2	E-UTRAN radio channel (1) and NR radio channel (2) are used for this test
Time offset between cells			1, 4, 7, 8	3 ms	Asynchronous cells
			2, 5	3 μs	Synchronous cells
			3, 6	3 μs	Synchronous cells
Access Barring Information		-	1, 2, 3, 4, 5, 6, 7, 8	Not Sent	No additional delays in random access procedure.
DRX cycle length		s	1, 2, 3, 4, 5, 6, 7, 8	1.28	The value shall be used for all cells in the test.
NR PRACH configuration index			1, 2, 3, 4, 5, 6, 7, 8	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
T1		s	1, 2, 3, 4, 5, 6, 7, 8	15	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2		s	1, 2, 3, 4, 5, 6, 7, 8	>7	During T2, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T3.
T3		s	1, 2, 3, 4, 5, 6, 7, 8	75	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.18.2.1.1.1-3: Cell specific test parameters for NR cell 2

Parameter	Unit	Test configuration	Cell 2		
			T1	T2	T3
TDD configuration		1, 4, 7, 8	N/A		
		2, 5	TDDConf.1.1		
		3, 6	TDDConf.2.1		
PDSCH Reference measurement channel		1, 4, 7, 8	SR.1.1 FDD		
		2, 5	SR.1.1 TDD		
		3, 6	SR.2.1 TDD		
RMSI CORESET Reference Channel		1, 4, 7, 8	CR.1.1 FDD		
		2, 5	CR.1.1 TDD		
		3, 6	CR.2.1 TDD		
RMC CORESET Reference Channel		1, 4, 7, 8	CCR.1.1 FDD		
		2, 5	CCR.1.1 TDD		
		3, 6	CCR.2.1 TDD		
OCNG Patterns		1, 2, 3, 4, 5, 6, 7, 8	OP.1		
SMTC configuration		1, 2, 3, 4, 5, 6, 7, 8	SMTC.1		
SSB configuration		1, 4	SSB.1 FR1		
		2, 5	SSB.1 FR1		
		3, 6	SSB.1 RedCap FR1		
Initial DL BWP configuration		1, 2, 3, 4, 5, 6, 7, 8	DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3, 4, 5, 6, 7, 8	ULBWP.0.1		
RLM-RS		1, 2, 3, 4, 5, 6	SSB		
Qrxlevmin	dBm/SCS	1, 2, 4, 5	-140		
		3, 6	-137		

Pcompensation	dB	1, 2, 3, 4, 5, 6, 7, 8	0		
$Qhyst_S$	dB	1, 2, 3, 4, 5, 6	0		
$Qoffset_{S, n}$	dB	1, 2, 3, 4, 5, 6, 7, 8	0		
Cell_selection_and_reselection_quality_measurement		1, 2, 3, 4, 5, 6, 7, 8	SS-RSRP		
$\hat{E}_s / I_{ot}$	dB	1, 4, 7, 8	-4	-infinity	12
		2, 5			
		3, 6			
N_{oc} Note2	dBm/SCS	1, 4, 7, 8	-98		
		2, 5	-98		
		3, 6	-95		
N_{oc} Note2	dBm/15 kHz	1, 4, 7, 8	-98		
		2, 5			
		3, 6			
$\hat{E}_s / N_{oc}$	dB	1, 4, 7, 8	-4	-infinity	12
		2, 5			
		3, 6			
SS-RSRP Note3	dBm/SCS	1, 4, 7, 8	-102	-infinity	-86
		2, 5	-102	-infinity	-86
		3, 6	-99	-infinity	-83
Io	dBm/9.36 MHz	1, 4, 7, 8	-68.60	-70.05	-57.78
	dBm/9.36 MHz	2, 5	-68.60	-70.05	-57.78
	dBm/38.16 MHz	3, 6	-62.50	-63.95	-51.69
Treselection	s	1, 2, 3, 4, 5, 6, 7, 8	0	0	0
SnonintrasearchP	dB	1, 2, 3, 4, 5, 6, 7, 8	50		
$Thresh_{x, highP}$	dB	1, 2, 3, 4, 5, 6, 7, 8	48		
$Thresh_{serving, lowP}$	dB	1, 2, 3, 4, 5, 6, 7, 8	44		
$Thresh_{x, lowP}$	dB	1, 2, 3, 4, 5, 6, 7, 8	50		
Propagation Condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.18.2.1.1.1-4: Cell specific test parameters for E-UTRA cell 1

Parameter	Unit	Cell 1		
		T1	T2	T3
E-UTRA RF Channel number		1		
$BW_{channel}$	MHz	10		
OCNG Patterns defined in TS 36.133 [15] clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6		
PBCH_RA	dB			
PBCH_RB	dB			
PSS_RA	dB			
SSS_RA	dB			

PCFICH_RB	dB	0		
PHICH_RA	dB			
PHICH_RB	dB			
PDCCH_RA	dB			
PDCCH_RB	dB			
PDSCH_RA	dB			
PDSCH_RB	dB			
OCNG_RA Note 1	dB			
OCNG_RB Note 1	dB			
Qrxlevmin	dBm	-140		
N_{oc} Note 2	dBm/15 kHz	-98		
RSRP Note 3	dBm/15 KHz	-84	-84	-84
$\hat{E}_s / I_{ot}$	dB	14	14	14
$\hat{E}_s / N_{oc}$	dB	14	14	14
$Treselection_{EUTRAN}$	S	0		
SnonintrasearchP	dB	50		
$Thresh_{x, highP}$	dB	48		
$Thresh_{serving, lowP}$	dB	44		
$Thresh_{x, lowP}$	dB	50		
Propagation Condition		AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.18.2.1.1.2 Test Requirements

The cell reselection delay to a higher priority NR cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on cell 2 and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a registration procedure for mobility and periodic registration update on cell 2.

The cell re-selection delay to a higher priority cell shall be less than 68 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a higher priority cell can be expressed as: $T_{higher_priority_search} + T_{evaluate, NR} + T_{SI-NR,}$ and to a lower priority cell can be expressed as: $T_{evaluate, NR} + T_{SI-NR,}$

Where:

$T_{higher_priority_search}$ See clause 4.2.2 in TS 36.133 [15]

$T_{evaluate, NR}$ See Table 4.2.2.5.6-1 in clause 4.2.2.5.6 in TS 36.133 [15]

T_{SI-NR} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 67.68 s, allow 68 s for the cell re-selection delay to a higher priority NR cell and 7.68 s for the cell re-selection delay to a lower priority cell in the test case, which we allow 8 s.

A.18.2 RRC_CONNECTED state mobility

A.18.2.1 Handover

A.18.2.1.1 E-UTRAN - NR handover in FR1

A.18.2.1.1.1 Test Purpose and Environment

This test shall verify the E-UTRAN to NR FR1 handover requirements for 2RX RedCap as specified in clause 5.3.4B in TS 36.133 [15].

The test comprises of one E-UTRA carrier and one NR carrier. There are two cells and one cell on each carrier. Cell 1 is the E-UTRAN and Cell 2 is an inter-RAT NR neighbour cell. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE does not have any timing information of Cell 2. Starting T2, Cell 2 becomes detectable and the UE is expected to detect and send a measurement report. Gap pattern configuration with id #0 as specified in Table 8.1.2.1-1 of TS 36.133 [15] is configured before T2 begins to enable inter-RAT frequency monitoring.

A RRC message implying handover shall be sent to the UE during period T2 after the UE has reported Event B2. The start of T3 is the instant when the last TTI containing the RRC message implying handover is sent to the UE. The handover message shall contain Cell 2 as the target cell.

Supported test configurations are shown in table A.18.2.1.1-1. General test parameters are provided in Table A.18.2.1.1-2. Cell specific test parameters for Cell 1 and Cell 2 are provided in Tables A.18.2.1.1-3 and A.18.2.1.1-4 respectively.

Table A.18.2.1.1-1: Supported test configurations for E-UTRAN inter-RAT NR handover

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
6	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
7	LTE TDD, NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
8	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.18.2.1.1-2: General test parameters for E-UTRAN inter-RAT NR handover

Parameter		Unit	Value	Comment
NR RF Channel Number			1	1 NR carrier frequency is used in the test
LTE RF Channel Number			2	1 E-UTRAN carrier frequency is used in the test
Initial conditions	Active cell		Cell 1	E-UTRAN cell
	Neighbouring cell		Cell 2	NR cell
Final condition	Active cell		Cell 2	
NR measurement quantity			SS-RSRP	
E-UTRAN measurement quantity			RSRP	
b2-Threshold1		dBm	-83	Absolute E-UTRAN RSRP threshold for event B2
b2-Threshold2NR		dBm	As specified in Table A.18.2.1.1-4	Absolute NR SS-RSRP threshold for event B2
Hysteresis		dB	0	
TimeToTrigger		s	0	
Filter coefficient			0	L3 filtering is not used

DRX		OFF	Non-DRX test
Access Barring Information	-	Not sent	No additional delays in random access procedure
Time offset between cells		3 ms	Asynchronous cells
Gap pattern configuration Id		0	As specified in Table 8.1.2.1-1 started before T2 starts [15]
T1	s	5	
T2	s	≤5	
T3	s	1	

Table A.18.2.1.1-3: Cell specific test parameters for E-UTRAN inter-RAT NR handover (Cell 1)

Parameter	Unit	Configuration	Cell 1		
			T1	T2	T3
RF channel number		1, 2, 3, 4, 5, 6,7,8	2		
Duplex mode		1, 2, 3,4	FDD		
		5, 6,7, 8	TDD		
TDD special subframe configuration[Note1]		5, 6,7, 8	6		
TDD uplink-downlink configuration[Note1]		5, 6,7, 8	1		
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6, 7, 8	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100		
PRACH Configuration[Note2]		1, 2, 3,4	4		
		5, 6,7, 8	53		
PDSCH parameters: DL Reference Measurement Channel[Note3]		1, 2, 3,4	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD		
		5, 6,7, 8	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD		
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note3]		1, 2, 3,4	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD		
		5, 6,7, 8	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD		
OCNG Patterns[Note3]		1, 2, 3,4	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD		
		5, 6,7, 8	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD		
PBCH_RA	dB	1, 2, 3, 4, 5, 6, 7, 8	0		
PBCH_RB					
PSS_RA					
SSS_RA					
PCFICH_RB					
PHICH_RA					
PHICH_RB					
PDCCH_RA					
PDCCH_RB					
PDSCH_RA					
PDSCH_RB					
OCNG_RA[Note4]					

OCNG_RB[Note4]					
N_{oc}[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-98		
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6, 7, 8	7	7	7
$\hat{E}_s/I_{ot}$[Note6]	dB	1, 2, 3, 4, 5, 6, 7, 8	7	7	7
RSRP[Note6]	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-91	-91	-91
SCH_RP[Note6]	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-91	-91	-91
Io[Note6]	dBm/9MHz	1, 2, 3, 4, 5, 6, 7, 8	-62.43	-62.43	-62.43
Propagation Condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN		
Antenna Configuration and Correlation Matrix [Note7]		1, 2, 3, 4, 5, 6, 7, 8	1x2 Low		

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [23].
Note 3: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 4: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 6: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 7: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].

Table A.18.2.1.1-4: Cell specific test parameters E-UTRAN inter-RAT NR handover (Cell 2)

Parameter		Unit	Configuration	Cell 2		
				T1	T2	T3
RF channel number			1, 2, 3, 4, 5, 6, 7, 8	1		
Duplex mode			1, 5	FDD		
			2, 3, 6, 7	TDD		
			4,8	HD-FDD		
TDD Configuration			2, 6	TDDConf.1.1		
			3, 7	TDDConf.2.1		
$BW_{channel}$		MHz	1, 4,5,8	10: $N_{RB,c}$ = 52 (FDD)		
			2, 6	10: $N_{RB,c}$ = 52 (TDD)		
			3, 7	20: $N_{RB,c}$ = 51 (TDD)		
PDSCH reference measurement channel			1, 4,5,8	SR.1.1 FDD		
			2, 6	SR.1.1 TDD		
			3, 7	SR.2.1 TDD		
CORSET reference channel			1, 4,5,8	CR.1.1 FDD		
			2, 6	CR.1.1 TDD		
			3, 7	CR.2.1 TDD		
PRACH configuration			1, 2, 3, 4, 5, 6, 7, 8	FR1 PRACH configuration 1		
OCNG pattern[Note1]			1, 2, 3, 4, 5, 6, 7, 8	OP.1		
BWP	Initial DL BWP		1, 2, 3, 4, 5, 6, 7, 8	DLBWP.0.1		
	Dedicated DL BWP			DLBWP.1.1		
	Initial UL BWP			ULBWP.0.1		

Dedicated UL BWP				ULBWP.1.1		
SMTC configuration			1, 2, 3, 4, 5, 6, 7, 8	SMTC.1 RedCap		
SSB configuration			1,2,4,5,6,8	SSB.1 RedCap FR1		
			3,7	SSB.2 RedCap FR1		
b2-Threshold2NR		dBm	1,2,4,5,6,8	-106		
			3,7	-103		
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4, 5, 6, 7, 8	0		
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						
EPRE ratio of PDCCH to PDCCH_DMRS						
EPRE ratio of PDSCH_DMRS to SSS						
EPRE ratio of PDSCH to PDSCH_DMRS						
EPRE ratio of OCNG DMRS to SSS						
EPRE ratio of OCNG to OCNG DMRS						
N_{oc} Note2		dBm/15 KHz	1, 2, 3, 4, 5, 6, 7, 8	-98		
N_{oc} Note2		dBm/SCS	1,2,4,5,6,8	-98		
			3,7	-95		
$\hat{E}_s/N_{oc}$		dB	1, 2, 3, 4, 5, 6, 7, 8	-inifinity	0	0
$\hat{E}_s/I_{ot}$ Note3		dB	1, 2, 3, 4, 5, 6, 7, 8	-inifinity	0	0
SS-RSRP Note3		dBm/SCS	1, 2, 4, 5, 6,8	-inifinity	-98	-98
			3, 7	-inifinity	-95	-95
Io Note3		dBm/9.36 MHz	1, 2, 4, 5, 6,8	-70.05	-67.04	-67.04
		dBm/18.36 MHz	3, 7	-67.13	-60.94	-64.12
Propagation condition			1, 2, 3, 4, 5, 6, 7, 8	AWGN		
Antenna Configuration and Correlation Matrix			1, 2, 3, 4, 5, 6, 7, 8	1x2 Low		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.18.2.1.1.2 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 112 ms from the beginning of time period T3.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 50 ms and is specified in TS36.133.

$T_{interrupt}$ = 62 ms in the test; $T_{interrupt}$ is defined in TS36.133 clause 5.3.4.3.

This gives a total of 112 ms.

A.18.2.2 RRC connection release with redirection

A.18.2.2.1 Redirection from E-UTRA to NR FR1 for redcap UE

A.18.2.2.1.1 Test Purpose and Environment

This test is to verify RRC connection release with redirection from E-UTRA to NR requirements specified in 36.133 clause 6.3.2.6.

A.18.2.2.1.2 Test Parameters

Supported test configurations are shown in table A.18.2.2.1.2-1. The time delay is tested by using the parameters in table A.18.2.2.1.2-2, A.18.2.2.1.2-3, and A.18.2.2.1.2-4.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. The *RRCConnectionRelease* message shall be sent to the UE during period T1 and the start of T2 is the instant when the last TTI containing the RRC message is sent to the UE. Prior to time duration T2, the UE shall not have any timing information of Cell 2. Cell 2 is powered up at the beginning of the T2.

Table A.18.2.2.1.2-1: Redirection from E-UTRAN to NR test configurations

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6	NR 30kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE TDD
7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE FDD
8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.18.2.2.1.2-2: General test parameters for Redirection from E-UTRAN to NR test case

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	E-UTRAN cell
	Neighbouring cell		Cell 2	NR cell
Final condition	Active cell		Cell 2	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	2.3	

Table A.18.2.2.1.2-3: Cell specific test parameters for Redirection from E-UTRAN to NR test case (cell 1)

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6,7,8	2	

Duplex mode		1, 2, 3,7	FDD	
		4, 5, 6,8	TDD	
TDD special subframe configuration[Note1]		4, 5, 6,8	6	
TDD uplink-downlink configuration[Note1]		4, 5, 6,8	1	
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6,7,8	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PRACH Configuration[Note2]		1, 2, 3,7	4	
		4, 5, 6,8	53	
PDSCH parameters: DL Reference Measurement Channel[Note3]		1, 2, 3,7	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6,8	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note3]		1, 2, 3,7	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6,8	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note3]		1, 2, 3,7	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6,8	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
PBCH_RA	dB	1, 2, 3, 4, 5, 6,7,8	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note4]				
OCNG_RB[Note4]				
N_{oc}[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6,7,8	-98	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6,7,8	4	4
$\hat{E}_s/I_{ot}$[Note6]	dB	1, 2, 3, 4, 5, 6,7,8	4	4
RSRP[Note6]	dBm/15kHz	1, 2, 3, 4, 5, 6,7,8	-94	-94
SCH_RP[Note6]	dBm/15kHz	1, 2, 3, 4, 5, 6,7,8	-94	-94
Io[Note6]	dBm/9MHz	1, 2, 3, 4, 5, 6,7,8	-64.76	-64.76

Propagation Condition		1, 2, 3, 4, 5, 6,7,8	AWGN

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [23].
Note 3: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 4: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 6: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 7: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].

Table A.18.2.2.1.2-4: Cell specific test parameters for Redirection from E-UTRAN to NR test case (cell 2)

Parameter		Unit	Cell 2	
			T1	T2
RF Channel Number			1	
Duplex mode	Config 1,4		FDD	
	Config 2,3,5,6		TDD	
	Config 7,8		HD-FDD	
SSB Configuration	Config 1,2,4,5,7,8		SSB.1 FR1	
	Config 3,6		SSB.1 RedCap FR1	
TDD configuration	Config 1,4,7,8		Not Applicable	
	Config 2,5		TDDConf.1.1	
	Config 3,6		TDDConf.2.1	
$BW_{channel}$	Config 1,4,7,8	MHz	10: $N_{RB,c}$ = 52	
	Config 2,5		10: $N_{RB,c}$ = 52	
	Config 3,6		20: $N_{RB,c}$ = 51	
BWP BW	Config 1,4,7,8	MHz	10: $N_{RB,c}$ = 52	
	Config 2,5		10: $N_{RB,c}$ = 52	
	Config 3,6		20: $N_{RB,c}$ = 51	
DRX Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1,4,7,8		SR.1.1 FDD	
	Config 2,5		SR.1.1 TDD	
	Config 3,6		SR.2.1 TDD	
CORESET Reference Channel	Config 1,4,7,8		CR.1.1 FDD	
	Config 2,5		CR.1.1 TDD	
	Config 3,6		CR.2.1 TDD	
OCNG Patterns			OCNG pattern 1	
SMTC configuration	Config 1,2,4,5,7,8		SMTC.1 RedCap FR1	
	Config 3,6		SMTC.1 RedCap FR1	
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5,7,8	kHz	15 kHz	
	Config 3,6		30 kHz	
PUCCH/PUSCH subcarrier spacing	Config 1,2,4,5,7,8	kHz	15 kHz	
	Config 3,6		30 kHz	
PRACH configuration			FR1 PRACH configuration 1	
BWP configuration	Initial DL BWP		DLBWP.0.1	
	Dedicated DL BWP		DLBWP.1.1	
	Initial UL BWP		ULBWP.0.1	
	Dedicated UL BWP		ULBWP.1.1	

EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2		dBm/15kHz	-98	
N_{oc} Note2	Config 1,2,4,5,7,8	dBm/SCS	-98	
	Config 3,6		-95	
$\hat{E}_s/I_{ot}$		dB	-infinity	4
$\hat{E}_s/N_{oc}$		dB	-infinity	4
Io Note3	Config 1,2,4,5,7,8	dBm/ 9.36MHz	-70.05	-64.59
	Config 3,6	dBm/ 18.36MHz	-67.12	-61.67
Propagation condition		-	AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

A.18.2.2.1.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 2240 ms from the beginning of time period T2.
The rate of correct RRC connection release redirection to NR observed during repeated tests shall be at least 90%.

NOTE: The redirection delay can be expressed as:

$T_{connection_release_redirect_NR_RedCap} = T_{RRC_procedure_delay} + T_{identify\text{-}NR_Redcap} + T_{SI\text{-}NR_RedCap} + T_{RACH_RedCap}$,

where:

$T_{RRC_procedure_delay}$ = 110 ms in the test.

$T_{identify\text{-}NR_Redcap}$ = 680 ms regardless RedCap UE is capable of 2 Rx or only supports 1 Rx antenna.

$T_{SI\text{-}NR_RedCap}$ = 1280 ms, it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target NR cell.

T_{RACH_RedCap} = 170 ms in the test.

This gives a total of 2240 ms.

A.18.3 Measurement procedure

A.18.3.1 E-UTRA – NR Inter-RAT Measurements

A.18.3.1.1 NR Inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is not used

A.18.3.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the RedCap UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.20.2.2 of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.20.2.3 of TS 36.133 [15] for E-UTRAN TDD-NR measurements.

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 1. The test parameters are given in Tables A.18.3.1.1.1-1, A.18.3.1.1.1-2, A.18.3.1.1.1-3 and A.18.3.1.1.1-4.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.18.3.1.1.1-2 is provided for RedCap UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #4 as defined in Table A.18.3.1.1.1-2 is provided for RedCap UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) [16] is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.18.3.1.1.1-1: NR inter-RAT event triggered reporting tests without SSB index reading for FR1

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
7	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
8	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.	

Table A.18.3.1.1.1-2: General test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		1, 2, 3, 4, 5, 6, 7, 8	1		One E-UTRAcarrier frequency is used.
NR RF Chanel Number		1, 2, 3, 4, 5, 6, 7, 8	1		One FR1 NR carrier frequency is used.
Active cell		1, 2, 3, 4, 5, 6, 7, 8	E-UTRA cell 1 (PCell)		E-UTRA cell 1 is on E-UTRA RF channel number 1.
Neighbour cell		1, 2, 3, 4, 5, 6, 7, 8	NR cell 2		NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2, 3, 4, 5, 6, 7, 8	0	4	As specified in clause Table 8.1.2.1-1 of TS 36.133 [15].

Measurement gap offset		1, 2, 3, 4, 5, 6, 7, 8	39	19	As specified in TS 36.331 [16].
b2-Threshold1	dBm	1, 2, 3, 4, 5, 6, 7, 8	Note 1		E-UTRA RSRP threshold for E-UTRA RSRP measurement on cell 1 for event B2 [16]
b2-Threshold2NR	dBm	1, 2, 3, 4, 5, 6, 7, 8	Note 2		SS-RSRP threshold for SS-RSRP measurement on cell 2 for event B2 [16]
Hysteresis	dB	1, 2, 3, 4, 5, 6, 7, 8	0		
CP length		1, 2, 3, 4, 5, 6, 7, 8	Normal		
TimeToTrigger	s	1, 2, 3, 4, 5, 6, 7, 8	0		
Filter coefficient		1, 2, 3, 4, 5, 6, 7, 8	0		L3 filtering is not used
DRX		1, 2, 3, 4, 5, 6, 7, 8	OFF		DRX is not used
Time offset between serving and neighbour cells		1, 4, 7, 8	3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2, 3, 5, 6	3μs		Synchronous cells.
T1	s	1, 2, 3, 4, 5, 6, 7, 8	5		
T2	s	1, 2, 3, 4, 5, 6, 7, 8	1	1	
Note 1: The value of b2-Threshold1 is defined in Table A.18.3.1.1.1-3 Note 2: The value of b2-Threshold2NR is defined in Table A.18.3.1.1.1-4					

Table A.18.3.1.1.1-3: E-UTRAN PCell specific test parameters for NR inter-RAT event triggered reporting in non-DRX with NR neigbour cell in FR1 without SSB time index detection

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6, 7, 8	1	
Duplex mode		1, 2, 3, 7	FDD	
		4, 5, 6, 8	TDD	
TDD special subframe configuration[Note1]		4, 5, 6, 8	6	
TDD uplink-downlink configuration[Note1]		4, 5, 6, 8	1	
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6, 7, 8	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3, 7	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6, 8	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3, 7	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6, 8	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]		1, 2, 3, 7	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	

		4, 5, 6, 8	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
b2-Threshold1	dBm	1, 2, 3, 4, 5, 6, 7, 8	-77	
PBCH_RA	dB	1, 2, 3, 4, 5, 6, 7, 8	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA Note3				
OCNG_RB Note3				
N_{oc} Note4	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6, 7, 8	17	17
$\hat{E}_s/I_{ot}$ Note5	dB	1, 2, 3, 4, 5, 6, 7, 8	17	17
RSRP Note5	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-87	-87
SCH_RP Note5	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-87	-87
Io Note5	dBm/9MHz	1, 2, 3, 4, 5, 6, 7, 8	-59.13+10log ($N_{RB,c}$ /50)	-59.13+10log ($N_{RB,c}$ /50)
Propagation Condition Note6		1, 2, 3, 4, 5, 6, 7, 8	ETU70	
Antenna Configuration and Correlation Matrix Note6		1, 2, 3, 4, 5, 6, 7, 8	1x2 Low	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].

Table A.18.3.1.1.1-4: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
NR RF Channel Number		1, 2, 3, 4, 5, 6, 7, 8	1	
Duplex mode		1, 4	FDD	
		2, 3, 5, 6	TDD	
		7, 8	HD-FDD	
TDD configuration		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	
$BW_{channel}$	MHz	1, 2, 4, 5, 7, 8	10: $N_{RB,c}$ = 52	
		3, 6	20: $N_{RB,c}$ = 51	

OCNG Patterns defined in A.3.2.1.1 (OP.1)		1, 2, 3, 4, 5, 6, 7, 8	OP.1	
SMTC configuration defined in A.3.11.1 and A.3.11.2		1, 4, 7, 8	SMTC.2	
		2, 3, 5, 6	SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2, 4, 5, 7, 8	15	
		3, 6	30	
b2-Threshold2NR	dBm/SCS	1, 2, 4, 5, 7, 8	-101	
		3, 6	-98	
EPRE ratio of PSS to SSS		1, 2, 3, 4, 5, 6, 7, 8	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-98	
N_{oc} Note2	dBm/SCS	1, 2, 4, 5, 7, 8	-98	
		3, 6	-95	
SS-RSRP Note 3	dBm/SCS	1, 2, 4, 5, 7, 8	-Infinity	-91
		3, 6	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	7
Io Note3	dBm/9.36MHz	1, 2, 4, 5, 7, 8	-70.05	-62.26
	dBm/18.36MHz	3, 6	-67.13	-59.34
Propagation Condition		1, 2, 3, 4, 5, 6, 7, 8	TDL-C 300ns 100Hz	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6, 7, 8	1x2 Low	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.18.3.1.1.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-FR gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 800 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and test 2, the UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.18.3.1.2 NR Inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is used

A.18.3.1.2.1 Test Purpose and Environment

The purpose of this test is to verify that the RedCap UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.20.2.2 of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.20.2.3 of TS 36.133 [15] for E-UTRAN TDD-NR measurements.

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 1. The test parameters are given in Tables A.18.3.1.2.1-1, A.18.3.1.2.1-2, A.18.3.1.2.1-3 and A.18.3.1.2.1-4.

In tests 1 and 2, measurement gap pattern configuration # 0 as defined in Table A.18.3.1.2.1-2 is provided for RedCap UE that does not support per-FR gap and in tests 3 and 4, measurement gap pattern configuration #4 as defined in Table A.18.3.1.2.1-2 is provided for RedCap UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) [16] is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.18.3.1.2.1-1: NR inter-RAT event triggered reporting tests without SSB index reading for FR1

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
7	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
8	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.	

Table A.18.3.1.2.1-2: General test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
E-UTRA RF Channel Number		1, 2, 3, 4, 5, 6, 7, 8	1				One E-UTRA carrier frequency is used.
NR RF Channel Number		1, 2, 3, 4, 5, 6, 7, 8	1				One FR1 NR carrier frequency is used.
Active cell		1, 2, 3, 4, 5, 6, 7, 8	E-UTRA cell 1 (PCell)				E-UTRA cell 1 is on E-UTRA RF channel number 1.

Neighbour cell		1, 2, 3, 4, 5, 6, 7, 8	NR cell 2				NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2, 3, 4, 5, 6, 7, 8	0		4		As specified in clause Table 8.1.2.1-1 of TS 36.133 [15].
Measurement gap offset		1, 2, 3, 4, 5, 6, 7, 8	39		19		As specified in TS 36.331 [16].
b2-Threshold1	dBm	1, 2, 3, 4, 5, 6, 7, 8	Note 1				E-UTRA RSRP threshold for E-UTRA RSRP measurement on cell 1 for event B2 [16]
b2-Threshold2NR	dBm	1, 2, 3, 4, 5, 6, 7, 8	Note 2				SS-RSRP threshold for SS-RSRP measurement on cell 2 for event B2 [16]
Hysteresis	dB	1, 2, 3, 4, 5, 6, 7, 8	0				
CP length		1, 2, 3, 4, 5, 6, 7, 8	Normal				
TimeToTrigger	s	1, 2, 3, 4, 5, 6, 7, 8	0				
Filter coefficient		1, 2, 3, 4, 5, 6, 7, 8	0				L3 filtering is not used
DRX		1, 2, 3, 4, 5, 6, 7, 8	DRX.9	DRX.12	DRX.9	DRX.12	As specified in clause A.3.3
Time offset between serving and neighbour cells		1, 4, 7, 8	3ms				Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2, 3, 5, 6	3µs				Synchronous cells.
T1	s	1, 2, 3, 4, 5, 6, 7, 8	5				
T2	s	1, 2, 3, 4, 5, 6, 7, 8	2	11	2	11	
Note 1: The value of b2-Threshold1 is defined in Table A.18.3.1.2.1-3 Note 2: The value of b2-Threshold2NR is defined in Table A.18.3.1.2.1-4							

Table A.18.3.1.2.1-3: E-UTRAN PCell specific test parameters for NR inter-RAT event triggered reporting in non-DRX with NR neigbour cell in FR1 without SSB time index detection

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6, 7, 8	1	
Duplex mode		1, 2, 3, 7	FDD	
		4, 5, 6, 8	TDD	
TDD special subframe configuration[Note1]		4, 5, 6, 8	6	
TDD uplink-downlink configuration[Note1]		4, 5, 6, 8	1	
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6, 7, 8	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3, 7	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6, 8	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3, 7	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	

		4, 5, 6, 8	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]		1, 2, 3, 7	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6, 8	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
b2-Threshold1	dBm	1, 2, 3, 4, 5, 6, 7, 8	-77	
PBCH_RA PBCH_RB PSS_RA SSS_RA PCFICH_RB PHICH_RA PHICH_RB PDCCH_RA PDCCH_RB PDSCH_RA PDSCH_RB OCNG_RA[Note3] OCNG_RB[Note3]	dB	1, 2, 3, 4, 5, 6, 7, 8	0	
N_{oc}[Note4]	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6, 7, 8	17	17
$\hat{E}_s/I_{ot}$[Note5]	dB	1, 2, 3, 4, 5, 6, 7, 8	17	17
RSRP[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-87	-87
SCH_RP[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-87	-87
Io[Note5]	dBm/9MHz	1, 2, 3, 4, 5, 6, 7, 8	-59.13+10log ($N_{RB,c}$ /50)	-59.13+10log ($N_{RB,c}$ /50)
Propagation Condition [Note6]		1, 2, 3, 4, 5, 6, 7, 8	ETU70	
Antenna Configuration and Correlation Matrix [Note6]		1, 2, 3, 4, 5, 6, 7, 8	1x2 Low	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].

Table A.18.3.1.2.1-4: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
NR RF Channel Number		1, 2, 3, 4, 5, 6, 7, 8	1	
Duplex mode		1, 4	FDD	

		2, 3, 5, 6	TDD	
		7, 8	HD-FDD	
TDD configuration		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	
$BW_{channel}$	MHz	1, 2, 4, 5, 7, 8	10: $N_{RB,c}$ = 52	
		3, 6	20: $N_{RB,c}$ = 51	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		1, 2, 3, 4, 5, 6, 7, 8	OP.1	
SMTC configuration defined in A.3.11.1 and A.3.11.2		1, 4, 7, 8	SMTC.2	
		2, 3, 5, 6	SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2, 4, 5	15	
		3, 6	30	
b2-Threshold2NR	dBm/SCS	1, 2, 4, 5, 7, 8	-101	
		3, 6	-98	
EPRE ratio of PSS to SSS		1, 2, 3, 4, 5, 6, 7, 8	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-98	
N_{oc} Note2	dBm/SCS	1, 2, 4, 5, 7, 8	-98	
		3, 6	-95	
SS-RSRP Note 3	dBm/SCS	1, 2, 4, 5, 7, 8	-Infinity	-91
		3, 6	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	7
Io Note3	dBm/9.36MHz	1, 2, 4, 5, 7, 8	-70.05	-62.26
	dBm/18.36MHz	3, 6	-67.13	-59.34
Propagation Condition		1, 2, 3, 4, 5, 6, 7, 8	TDL-C 300ns 100Hz	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6, 7, 8	1x2 Low	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.18.3.1.2.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 1080 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 10240 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 3 with per-FR gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 1080 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 4 with per-FR gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 10240 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In tests 1, 2, 3 and 4, the UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.18.3.1.3 NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is not used

A.18.3.1.3.1 Test Purpose and Environment

The purpose of this test is to verify that the RedCap UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.20.2.2of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.20.2.3 of TS 36.133 [15] for E-UTRAN TDD-NR measurements.

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 1. The test parameters are given in Tables A.18.3.1.3.1-1, A.18.3.1.3.1-2, A.18.3.1.3.1-3 and A.18.3.1.3.1-4.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.18.3.1.3.1-2 is provided for RedCap UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #4 as defined in Table A.18.3.1.3.1-2 is provided for RedCap UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) [16] is used. In the measurement configuration the UE shall be indicated to report the SSB index of the identified NR cell. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.18.3.1.3.1-1: NR inter-RAT event triggered reporting tests without SSB index reading for FR1

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
7	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
8	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.	

Table A.18.3.1.3.1-2: General test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		1, 2, 3, 4, 5, 6, 7, 8	1		One E-UTRA carrier frequency is used.
NR RF Channel Number		1, 2, 3, 4, 5, 6, 7, 8	1		One FR1 NR carrier frequency is used.
Active cell		1, 2, 3, 4, 5, 6, 7, 8	E-UTRA cell 1 (PCell)		E-UTRA cell 1 is on E-UTRA RF channel number 1.
Neighbour cell		1, 2, 3, 4, 5, 6, 7, 8	NR cell 2		NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2, 3, 4, 5, 6, 7, 8	0	4	As specified in clause Table 8.1.2.1-1 of TS 36.133 [15].
Measurement gap offset		1, 2, 3, 4, 5, 6, 7, 8	39	19	As specified in TS 36.331 [16].
b2-Threshold1	dBm	1, 2, 3, 4, 5, 6, 7, 8	Note 1		E-UTRA RSRP threshold for E-UTRA RSRP measurement on cell 1 for event B2 [16]
b2-Threshold2NR	dBm	1, 2, 3, 4, 5, 6, 7, 8	Note 2		SS-RSRP threshold for SS-RSRP measurement on cell 2 for event B2 [16]
Hysteresis	dB	1, 2, 3, 4, 5, 6, 7, 8	0		
CP length		1, 2, 3, 4, 5, 6, 7, 8	Normal		
TimeToTrigger	s	1, 2, 3, 4, 5, 6, 7, 8	0		
Filter coefficient		1, 2, 3, 4, 5, 6, 7, 8	0		L3 filtering is not used
DRX		1, 2, 3, 4, 5, 6, 7, 8	OFF		DRX is not used
Time offset between serving and neighbour cells		1, 4, 7, 8	3ms		Asynchronous cells. The timing of Cell 2 is 3 ms later than the timing of Cell 1.
		2, 3, 5, 6	3μs		Synchronous cells.
T1	s	1, 2, 3, 4, 5, 6, 7, 8	5		
T2	s	1, 2, 3, 4, 5, 6, 7, 8	2	1	
Note 1: The value of b2-Threshold1 is defined in Table A.18.3.1.3.1-3 Note 2: The value of b2-Threshold2NR is defined in Table A.18.3.1.3.1-4					

Table A.18.3.1.3.1-3: E-UTRAN PCell specific test parameters for NR inter-RAT event triggered reporting in non-DRX with NR neigbour cell in FR1 without SSB time index detection

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6, 7, 8	1	
Duplex mode		1, 2, 3, 7	FDD	
		4, 5, 6, 8	TDD	
TDD special subframe configuration[Note1]		4, 5, 6, 8	6	
TDD uplink-downlink configuration[Note1]		4, 5, 6, 8	1	

$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6, 7, 8	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel Note2		1, 2, 3, 7	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6, 8	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel Note2		1, 2, 3, 7	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6, 8	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns Note2		1, 2, 3, 7	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6, 8	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
b2-Threshold1	dBm	1, 2, 3, 4, 5, 6, 7, 8	-77	
PBCH_RA	dB	1, 2, 3, 4, 5, 6, 7, 8	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA Note3				
OCNG_RB Note3				
N_{oc} Note4	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6, 7, 8	17	17
$\hat{E}_s/I_{ot}$ Note5	dB	1, 2, 3, 4, 5, 6, 7, 8	17	17
RSRP Note5	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-87	-87
SCH_RP Note5	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-87	-87
Io Note5	dBm/9MHz	1, 2, 3, 4, 5, 6, 7, 8	-59.13+10log ($N_{RB,c}$ /50)	-59.13+10log ($N_{RB,c}$ /50)
Propagation Condition Note6		1, 2, 3, 4, 5, 6, 7, 8	ETU70	
Antenna Configuration and Correlation Matrix Note6		1, 2, 3, 4, 5, 6, 7, 8	1x2 Low	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].

Table A.18.3.1.3.1-4: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
NR RF Channel Number		1, 2, 3, 4, 5, 6, 7, 8	1	
Duplex mode		1, 4	FDD	
		2, 3, 5, 6	TDD	
		7, 8		
TDD configuration		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	
$BW_{channel}$	MHz	1, 2, 4, 5, 7, 8	10: $N_{RB,c}$ = 52	
		3, 6	20: $N_{RB,c}$ = 51	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		1, 2, 3, 4, 5, 6, 7, 8	OP.1	
SMTC configuration defined in A.3.11.1 and A.3.11.2		1, 4, 7, 8	SMTC.2	
		2, 3, 5, 6	SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2, 4, 5, 7, 8	15	
		3, 6	30	
b2-Threshold2NR	dBm/SCS	1, 2, 4, 5, 7, 8	-101	
		3, 6	-98	
EPRE ratio of PSS to SSS		1, 2, 3, 4, 5, 6, 7, 8	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-98	
N_{oc} Note2	dBm/SCS	1, 2, 4, 5, 7, 8	-98	
		3, 6	-95	
SS-RSRP Note 3	dBm/SCS	1, 2, 4, 5, 7, 8	-Infinity	-91
		3, 6	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	7
Io Note3	dBm/9.36MHz	1, 2, 4, 5, 7, 8	-70.05	-62.26
	dBm/18.36MHz	3, 6	-67.13	-59.34
Propagation Condition		1, 2, 3, 4, 5, 6, 7, 8	TDL-C 300ns 100Hz	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6, 7, 8	1x2 Low	

Note 1:	OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.18.3.1.3.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 1040 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-FR gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and test 2, the UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.18.3.1.4 NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is used

A.18.3.1.4.1 Test Purpose and Environment

The purpose of this test is to verify that the RedCap UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.20.2.2of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.20.2.3 of TS 36.133 [15] for E-UTRAN TDD-NR measurements.

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 1. The test parameters are given in Tables A.18.3.1.4.1-1, A.18.3.1.4.1-2, A.18.3.1.4.1-3 and A.18.3.1.4.1-4.

In tests 1 and 2, measurement gap pattern configuration # 0 as defined in Table A.18.3.1.4.1-2 is provided for RedCap UE that does not support per-FR gap and in tests 3 and 4, measurement gap pattern configuration #4 as defined in Table A.18.3.1.4.1-2 is provided for RedCap UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) [16] is used. In the measurement configuration the UE shall be indicated to report the SSB index of the identified NR cell. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.18.3.1.4.1-1: NR inter-RAT event triggered reporting tests without SSB index reading for FR1

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode

4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
7	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
8	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.	

Table A.18.3.1.4.1-2: General test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
E-UTRA RF Channel Number		1, 2, 3, 4, 5, 6, 7, 8	1				One E-UTRA carrier frequency is used.
NR RF Channel Number		1, 2, 3, 4, 5, 6, 7, 8	1				One FR1 NR carrier frequency is used.
Active cell		1, 2, 3, 4, 5, 6, 7, 8	E-UTRA cell 1 (PCell)				E-UTRA cell 1 is on E-UTRA RF channel number 1.
Neighbour cell		1, 2, 3, 4, 5, 6, 7, 8	NR cell 2				NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2, 3, 4, 5, 6, 7, 8	0		4		As specified in clause Table 8.1.2.1-1 of TS 36.133 [15].
Measurement gap offset		1, 2, 3, 4, 5, 6, 7, 8	39		19		As specified in TS 36.331 [16].
b2-Threshold1	dBm	1, 2, 3, 4, 5, 6, 7, 8	Note 1				E-UTRA RSRP threshold for E-UTRA RSRP measurement on cell 1 for event B2 [16]
b2-Threshold2NR	dBm	1, 2, 3, 4, 5, 6, 7, 8	Note 2				SS-RSRP threshold for SS-RSRP measurement on cell 2 for event B2 [16]
Hysteresis	dB	1, 2, 3, 4, 5, 6, 7, 8	0				
CP length		1, 2, 3, 4, 5, 6, 7, 8	Normal				
TimeToTrigger	s	1, 2, 3, 4, 5, 6, 7, 8	0				
Filter coefficient		1, 2, 3, 4, 5, 6, 7, 8	0				L3 filtering is not used
DRX		1, 2, 3, 4, 5, 6, 7, 8	DRX.9	DRX.12	DRX.9	DRX.12	As specified in clause A.3.3
Time offset between serving and neighbour cells		1, 4, 7, 8	3ms				Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2, 3, 5, 6	3μs				Synchronous cells.
T1	s	1, 2, 3, 4, 5, 6, 7, 8	5				
T2	s	1, 2, 3, 4, 5, 6, 7, 8	2	13	2	13	
Note 1: The value of b2-Threshold1 is defined in Table A.18.3.1.4.1-3 Note 2: The value of b2-Threshold2NR is defined in Table A.18.3.1.4.1-4							

Table A.18.3.1.4.1-3: E-UTRAN PCell specific test parameters for NR inter-RAT event triggered reporting in non-DRX with NR neigbour cell in FR1 without SSB time index detection

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6, 7, 8	1	
Duplex mode		1, 2, 3, 7	FDD	
		4, 5, 6, 8	TDD	
TDD special subframe configuration[Note1]		4, 5, 6, 8	6	
TDD uplink-downlink configuration[Note1]		4, 5, 6, 8	1	
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6, 7, 8	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3, 7	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6, 8	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3, 7	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6, 8	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]		1, 2, 3, 7	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6, 8	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
b2-Threshold1	dBm	1, 2, 3, 4, 5, 6, 7, 8	-77	
PBCH_RA	dB	1, 2, 3, 4, 5, 6, 7, 8	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note3]				
OCNG_RB[Note3]				
N_{oc}[Note4]	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6, 7, 8	17	17
$\hat{E}_s/I_{ot}$[Note5]	dB	1, 2, 3, 4, 5, 6, 7, 8	17	17
RSRP[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-87	-87
SCH_RP[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-87	-87

Io^{Note5}	dBm/9MHz	1, 2, 3, 4, 5, 6, 7, 8	-59.13+10log ($N_{RB,c}$ /50)	-59.13+10log ($N_{RB,c}$ /50)
Propagation Condition Note6		1, 2, 3, 4, 5, 6, 7, 8	ETU70	
Antenna Configuration and Correlation Matrix Note6		1, 2, 3, 4, 5, 6, 7, 8	1x2 Low	
Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].				
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.				
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].				

Table A.18.3.1.4.1-4: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
NR RF Channel Number		1, 2, 3, 4, 5, 6, 7, 8	1	
Duplex mode		1, 4	FDD	
		2, 3, 5, 6	TDD	
		7, 8	HD-FDD	
TDD configuration		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	
$BW_{channel}$	MHz	1, 2, 4, 5, 7, 8	10: $N_{RB,c}$ = 52	
		3, 6	20: $N_{RB,c}$ = 51	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		1, 2, 3, 4, 5, 6, 7, 8	OP.1	
SMTC configuration defined in A.3.11.1 and A.3.11.2		1, 4, 7, 8	SMTC.2	
		2, 3, 5, 6	SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2, 4, 5, 7, 8	15	
		3, 6	30	
b2-Threshold2NR	dBm/SCS	1, 2, 4, 5, 7, 8	-101	
		3, 6	-98	
EPRE ratio of PSS to SSS		1, 2, 3, 4, 5, 6, 7, 8	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-98	
N_{oc} Note2	dBm/SCS	1, 2, 4, 5, 7, 8	-98	
		3, 6	-95	
SS-RSRP Note 3	dBm/SCS	1, 2, 4, 5, 7, 8	-Infinity	-91
		3, 6	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	7

$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	7
Io[Note3]	dBm/9.36MHz	1, 2, 4, 5, 7, 8	-70.05	-62.26
	dBm/18.36MHz	3, 6	-67.13	-59.34
Propagation Condition		1, 2, 3, 4, 5, 6, 7, 8	TDL-C 300ns 100H	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6, 7, 8	1x2 Low	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.18.3.1.4.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 1280 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 12160 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 3 with per-FR gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 1280 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 4 with per-FR gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 12160 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In tests 1, 2, 3 and 4, the UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.18.3.1.5 NR Inter-RAT event triggered reporting tests for FR2 without SSB time index detection when DRX is not used

A.18.3.1.5.1 Test Purpose and Environment

The purpose of this test is to verify that the RedCap UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.20.2.2 of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.20.2.3 of TS 36.133 [15] for E-UTRAN TDD-NR measurements.

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 1. The test parameters are given in Tables A.18.3.1.5.1-1, A.18.3.1.5.1-2 and A.18.3.1.5.1-3.

The cell specific test parameters for E-UTRA cell1 as PCell are defined in clause A.3.7.2.2.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.18.3.1.5.1-2 is provided for RedCap UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #4 as defined in Table A.18.3.1.5.1-2 is provided for RedCap UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B1 (Inter RAT neighbour becomes better than threshold) [16] is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have timing information of NR cell 2.

Table A.18.3.1.5.1-1: NR inter-RAT event triggered reporting tests without SSB index reading for FR2 in non-DRX

Configuration	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.	

Table A.18.3.1.5.1-2: General test parameters for NR inter-RAT event triggered reporting for FR2 without SSB time index detection in non-DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		1, 2	1		One E-UTRAcarrier frequency is used.
NR RF Channel Number		1, 2	1		One FR2 NR carrier frequency is used.
Active cell		1, 2	E-UTRA cell 1 (PCell)		E-UTRA cell 1 is on E-UTRA RF channel number 1 as defined in clause A.3.7.2.2.
Neighbour cell		1, 2	NR cell 2		NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2	0	4	As specified in clause Table 8.1.2.1-1 of TS 36.133 [15].
Measurement gap offset		1, 2	39	19	As specified in TS 36.331 [16].
b1-ThresholdNR	dBm	1, 2	Note 1		SS-RSRP threshold for SS-RSRP measurement on cell 2 for event B1 [16]
Hysteresis	dB	1, 2	0		
CP length		1, 2	Normal		
TimeToTrigger	s	1, 2	0		
Filter coefficient		1, 2	0		L3 filtering is not used
DRX		1, 2	OFF		DRX is not used
Time offset between serving and neighbour cells		1	3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3μs		Synchronous cells.
T1	s	1, 2	10		
T2	s	1, 2	6	3	
Note 1: The value of b1-ThresholdNR is defined in Table A.18.3.1.5.1-3					

Table A.18.3.1.5.1-3: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR2 without SSB time index detection in non-DRX

Parameter	Unit	Test configuration	Cell 2	
			T1	T2

AoA setup defined in A.3.15.2.1			1, 2	Setup 2a	
Assumption for UE beams[Note 5]			1, 2	Rough	
NR RF Channel Number			1, 2	1	
Duplex mode			1, 2	TDD	
TDD configuration			1, 2	TDDConf.3.1	
$BW_{channel}$		MHz	1, 2	100: $N_{RB,c}$ = 66	
OCNG patterns defined in A.3.2.1.1			1, 2	OP. 3	
SMTC configuration defined in A.3.11.1 and A.3.11.2			1	SMTC.2	
			2	SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	1, 2	120	
b1-ThresholdNR	UE power class 3	dBm/SCS	1, 2	-112	
EPRE ratio of PSS to SSS			1, 2	0	
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS (Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} $\hat{E}_s$		dBm/SCS	1, 2	- Infinity	-80.6
SS B_RP [Note 3]		dBm/SCS	1, 2	-Infinity	-80.6
$\hat{E}_s / I_{ot}$ BB [Note 6]		dB	1, 2	-Infinity	8.3
Io[Note3]		dBm/95.04MHz	1, 2	-Infinity	-56.0
Propagation Condition			1, 2	AWGN	

Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: SS B_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Void
Note 5: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 6: Calculation of Es/Iot$_{BB}$ includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

A.18.3.1.5.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event B1 triggered measurement report, with a measurement reporting delay less than D1 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-FR gap, the UE shall send one Event B1 triggered measurement report, with a measurement reporting delay less than D2 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and test 2, the UE is not required to report SSB time index.

Table A.18.3.1.5.2-1: Test requirements for NR inter-RAT event triggered reporting for FR2 without SSB time index detection in non-DRX

Test case	Measurement reporting delay (ms)	
	Test 1: D1 ms	Test 2: D2 ms
UE power class 3	3200	1600

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.18.3.1.6 NR Inter-RAT event triggered reporting tests for FR2 without SSB time index detection when DRX is used

A.18.3.1.6.1 Test Purpose and Environment

The purpose of this test is to verify that the RedCap UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.20.2.2 of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.20.2.3 of TS 36.133 [15] for E-UTRAN TDD-NR measurements.

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 1. The test parameters are given in Tables A.18.3.1.6.1-1, A.18.3.1.6.1-2 and A.18.3.1.6.1-3.

The cell specific test parameters for E-UTRA cell1 as PCell are defined in clause A.3.7.2.2.

In tests 1 and 2, measurement gap pattern configuration # 0 as defined in Table A.18.3.1.6.1-2 is provided for RedCap UE that does not support per-FR gap and in tests 3 and 4, measurement gap pattern configuration #4 as defined in Table A.18.3.1.6.1-2 is provided for RedCap UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B1 (Inter RAT neighbour becomes better than threshold) [16] is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have timing information of NR cell 2.

Table A.18.3.1.6.1-1: NR inter-RAT event triggered reporting tests without SSB index reading for FR2 in DRX

Configuration	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.	

Table A.18.3.1.6.1-2: General test parameters for NR inter-RAT event triggered reporting for FR2 without SSB time index detection in DRX

Parameter	Unit	Test configuration	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
E-UTRA RF Channel Number		1, 2	1				One E-UTRA carrier frequency is used.
NR RF Channel Number		1, 2	1				One FR2 NR carrier frequency is used.

Active cell		1, 2, 3, 4, 5, 6	E-UTRA cell 1 (PCell)				E-UTRA cell 1 is on E-UTRA RF channel number 1 as defined in clause A.3.7.2.2.
Neighbour cell		1, 2, 3, 4, 5, 6	NR cell 2				NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2, 3, 4, 5, 6	0		4		As specified in clause Table 8.1.2.1-1 of TS 36.133 [15].
Measurement gap offset		1, 2, 3, 4, 5, 6	39		19		As specified in TS 36.331 [16].
b1-ThresholdNR	dBm	1, 2	Note 1				SS-RSRP threshold for SS-RSRP measurement on cell 2 for event B1 [16]
Hysteresis	dB	1, 2, 3, 4, 5, 6	0				
CP length		1, 2, 3, 4, 5, 6	Normal				
TimeToTrigger	s	1, 2, 3, 4, 5, 6	0				
Filter coefficient		1, 2, 3, 4, 5, 6	0				L3 filtering is not used
DRX		1, 2, 3, 4, 5, 6	DRX.9	DRX.12	DRX.9	DRX.12	As specified in clause A.3.3
Time offset between serving and neighbour cells		1	3ms				Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3µs				Synchronous cells.
T1	s	1, 2, 3, 4, 5, 6	5				
T2	s	1, 2, 3, 4, 5, 6	6	83	6	83	
Note 1: The value of b1-ThresholdNR is defined in Table A.18.3.1. 6.1-3							

Table A.18.3.1.6.1-3: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR2 without SSB time index detection in DRX

Parameter		Unit	Test configuration	Cell 2	
				T1	T2
AoA setup defined in A.3.15.1			1, 2	Setup 1	
Assumption for UE beams[Note 5]			1, 2	Rough	
NR RF Channel Number			1, 2	1	
Duplex mode			1, 2	TDD	
TDD configuration			1, 2	TDDConf.3.1	
$BW_{channel}$		MHz	1, 2	100: $N_{RB,c}$ = 66	
OCNG patterns defined in A.3.2.1.1 (OP.1)			1, 2	OP.1	
SMTC configuration defined in A.3.11.1 and A.3.11.2			1	SMTC.2	
			2	SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	1, 2	120	
b1-ThresholdNR	UE power class 3	dBm/SCS	1, 2	-106	
EPRE ratio of PSS to SSS			1, 2	0	
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					

EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	dBm/15kHz	1, 2	-104.7	
N_{oc} Note2	dBm/SCS	1, 2	-95.7	
SS-RSRP Note 3	dBm/SCS	1, 2	-Infinity	-87.7
$\hat{E}_s/I_{ot}$	dB	1, 2	-Infinity	8
$\hat{E}_s/N_{oc}$	dB	1, 2	-Infinity	8
Io Note3	dBm/95.04MHz	1, 2	-66.7	-58. 0
Propagation Condition		1, 2	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.18.3.1.6.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event B1 triggered measurement report, with a measurement reporting delay less than D1 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-UE gap, the UE shall send one Event B1 triggered measurement report, with a measurement reporting delay less than D2 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 3 with per-FR gap, the UE shall send one Event B1 triggered measurement report, with a measurement reporting delay less than D3 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 4 with per-FR gap, the UE shall send one Event B1 triggered measurement report, with a measurement reporting delay less than D4 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In tests 1, 2, 3 and 4, the UE is not required to report SSB time index.

Table A.18.3.1.6.2-1: Test requirements for NR inter-RAT event triggered reporting for FR2 without SSB time index detection in DRX

Test case	Measurement reporting delay (ms)			
	Test 1: D1 ms	Test 2: D2 ms	Test 3: D3 ms	Test 4: D4 ms
UE power class 3	4800	51200	4800	51200

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.18.3.1.7 NR Inter-RAT event triggered reporting tests for FR2 with SSB time index detection when DRX is not used

A.18.3.1.7.1 Test Purpose and Environment

The purpose of this test is to verify that the RedCap UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.20.2.2 of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.20.2.3 of TS 36.133 [15] for E-UTRAN TDD-NR measurements.

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 1. The test parameters are given in Tables A.18.3.1.7.1-1, A.18.3.1.7.1-2 and A.18.3.1.7.1-3.

The cell specific test parameters for E-UTRA cell1 as PCell are defined in clause A.3.7.2.2.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.18.3.1.7.1-2 is provided for RedCap UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #4 as defined in Table A.18.3.1.7.1-2 is provided for RedCap UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B1 (Inter RAT neighbour becomes better than threshold) [16] is used. In the measurement configuration the UE shall be indicated to report the SSB index of the identified NR cell. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.18.3.1.7.1-1: NR inter-RAT event triggered reporting tests with SSB index reading for FR2 in non-DRX

Configuration	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.	

Table A.18.3.1.7.1-2: General test parameters for NR inter-RAT event triggered reporting for FR2 with SSB time index detection in non-DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Numbers		1, 2	1		One E-UTRA carrier frequency is used.
NR RF Channel Numbers		1, 2	1		One FR2 NR carrier frequency is used.
Active cell		1, 2	E-UTRA cell 1 (PCell)		E-UTRA cell 1 is on E-UTRA RF channel number 1 as defined in clause A.3.7.2.2.
Neighbour cell		1, 2	NR cell 2		NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2	0	4	As specified in clause Table 8.1.2.1-1 of TS 36.133 [15].
Measurement gap offset		1, 2	39	19	As specified in TS 36.331 [16].
b1-ThresholdNR	dBm	1, 2	Note 1		SS-RSRP threshold for SS-RSRP measurement on cell 2 for event B1 [16]
Hysteresis	dB	1, 2	0		
CP length		1, 2	Normal		

TimeToTrigger	s	1, 2	0		
Filter coefficient		1, 2	0		L3 filtering is not used
DRX		1, 2	OFF		DRX is not used
Time offset between serving and neighbour cells		1	3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3μs		Synchronous cells.
T1	s	1, 2	5		
T2	s	1, 2	5	3	
Note 1: The value of b1-ThresholdNR is defined in Table A.18.3.1. 7.1-3					

Table A.18.3.1.7.1-3: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR2 with SSB time index detection in non-DRX

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
AoA setup defined in A.3.15.1		1, 2	Setup 1	
Assumption for UE beams Note 5		1, 2	Rough	
NR RF Channel Number		1, 2	1	
Duplex mode		1, 2	TDD	
TDD configuration		1, 2	TDDConf.3.1	
$BW_{channel}$	MHz	1, 2	100: $N_{RB,c}$ = 66	
OCNG patterns defined in A.3.2.1.1		1, 2	OP.1	
SMTC configuration defined in A.3.11.1 and A.3.11.2		1	SMTC.2	
		2	SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	120	
b1-ThresholdNR UE power class 3	dBm/SCS	1, 2	-106	
EPRE ratio of PSS to SSS		1, 2	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
$\hat{N}_{oc}$ Note2	dBm/15kHz	1, 2	-104.7	
N_{oc} Note2	dBm/SCS	1, 2	-95.7	
SS-RSRP Note 3	dBm/SCS	1, 2	-Infinity	-87.7
$\hat{E}_s/I_{ot}$	dB	1, 2	-Infinity	8
$\hat{E}_s/N_{oc}$	dB	1, 2	-Infinity	8
Io Note3	dBm/95.04MHz	1, 2	-66.7	-58. 0
Propagation Condition		1, 2	AWGN	

Note 1:	OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.18.3.1.7.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than D1 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-FR gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than D2 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and test 2, the UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

Table A.18.3.1.7.2-1: Test requirements for NR inter-RAT event triggered reporting for FR2 with SSB time index detection in non-DRX

Test case	Measurement reporting delay (ms)	
	Test 1: D1 ms	Test 2: D2 ms
UE power class 3	4160	2080

A.18.3.1.8 NR Inter-RAT event triggered reporting tests for FR2 with SSB time index detection when DRX is used

A.18.3.1.8.1 Test Purpose and Environment

The purpose of this test is to verify that the RedCap UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.20.2.2 of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.20.2.3 of TS 36.133 [15] for E-UTRAN TDD-NR measurements.

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 1. The test parameters are given in Tables A.18.3.1.8.1-1, A.18.3.1.8.1-2 and A.18.3.1.8.1-3.

The cell specific test parameters for E-UTRA cell1 as PCell are defined in clause A.3.7.2.2.

In tests 1 and 2, measurement gap pattern configuration # 0 as defined in Table A.18.3.1.8.1-2 is provided for RedCap UE that does not support per-FR gap and in tests 3 and 4, measurement gap pattern configuration #4 as defined in Table A.18.3.1.8.1-2 is provided for RedCap UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B1 (Inter RAT neighbour becomes better than threshold) [16] is used. In the measurement configuration the UE shall be indicated to report the SSB index of the identified NR cell. The test consists of two successive time periods, with

time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.18.3.1.8.1-1: NR inter-RAT event triggered reporting tests with SSB index reading for FR2 in DRX

Configuration	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.	

Table A.18.3.1.8.1-2: General test parameters for NR inter-RAT event triggered reporting for FR2 with SSB time index detection in DRX

Parameter	Unit	Test configuration	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
E-UTRA RF Channel Number		1, 2	1				One E-UTRA carrier frequency is used.
NR RF Channel Number		1, 2	1				One FR2 NR carrier frequency is used.
Active cell		1, 2	E-UTRA cell 1 (PCell)				E-UTRA cell 1 is on E-UTRA RF channel number 1 as defined in clause A.3.7.2.2.
Neighbour cell		1, 2	NR cell 2				NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2	0		4		As specified in clause Table 8.1.2.1-1 of TS 36.133 [15].
Measurement gap offset		1, 2	39		19		As specified in TS 36.331 [16].
b1-ThresholdNR	dBm	1, 2	Note 1				SS-RSRP threshold for SS-RSRP measurement on cell 2 for event B1 [16]
Hysteresis	dB	1, 2	0				
CP length		1, 2	Normal				
TimeToTrigger	s	1, 2	0				
Filter coefficient		1, 2	0				L3 filtering is not used
DRX			DRX.9	DRX.12	DRX.9	DRX.12	As specified in clause A.3.3
Time offset between serving and neighbour cells		1	3ms				Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3μs				Synchronous cells.
T1	s	1, 2	5				
T2	s	1, 2	7	70	7	70	
Note 1: The value of b1-ThresholdNR is defined in Table A.18.3.1. 8.1-3							

Table A.18.3.1.8.1-3: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR2 with SSB time index detection

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
AoA setup defined in A.3.15.1		1, 2	Setup 1	
Assumption for UE beams[Note 5]		1, 2	Rough	
NR RF Channel Number		1, 2	1	
Duplex mode		1, 2	TDD	

TDD configuration			1, 2	TDDConf.3.1	
$BW_{channel}$		MHz	1, 2	100: $N_{RB,c}$ = 66	
OCNG patterns defined in A.3.2.1.1			1, 2	OP.1	
SMTC configuration defined in A.3.11.1 and A.3.11.2			1	SMTC.2	
			2	SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	1, 2	120	
b1-ThresholdNR	UE power class 3	dBm/SCS	1, 2	-206	
EPRE ratio of PSS to SSS			1, 2	0	
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS (Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} Note2		dBm/15kHz	1, 2	-104.7	
N_{oc} Note2		dBm/SCS	1, 2	-95.7	
SS-RSRP Note 3		dBm/SCS	1, 2	-Infinity	-87.7
$\hat{E}_s/I_{ot}$		dB	1, 2	-Infinity	8
$\hat{E}_s/N_{oc}$		dB	1, 2	-Infinity	8
Io Note3		dBm/95.04MHz	1, 2	-66.7	-58. 0
Propagation Condition			1, 2	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.18.3.1.8.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than D1 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than D2 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 3 with per-FR gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than D3 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 4 with per-FR gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than D4 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In tests 1, 2, 3 and 4, the UE is required to report SSB time index.

Table A.18.3.1.8.2-1: Test requirements for NR inter-RAT event triggered reporting for FR2 with SSB time index detection in DRX

Test case	Measurement reporting delay (ms)			
	Test 1: D1 ms	Test 2: D2 ms	Test 3: D3 ms	Test 4: D4 ms
UE power class 3	6240	66560	6240	66560

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

Annex B (normative): Conditions for RRM requirements applicability for operating bands

B.1 Conditions for NR RRC_IDLE state mobility

B.1.1 Introduction

In Annex B.1, the following conditions are specified:

- UE conditions which shall apply for UE intra-frequency measurements procedures and requirements in clause 4,
- UE conditions which shall apply for UE inter-frequency measurements procedures and requirements in clause 4.

B.1.2 Conditions for measurements on NR intra-frequency cells for cell re-selection

This clause defines the following conditions for NR intra-frequency measurements performed based on SSBs for cell re-selection: SSB_RP and SSB Ês/Iot, applicable for a corresponding operating band.

The conditions are defined in Table B.1.2-1 for FR1 NR cells.

The conditions are defined in Table B.1.2-2 for FR2 NR cells.

Table B.1.2-1: Conditions for intra-frequency cell re-selection in FR1

Parameter	NR operating band groups Note1	Minimum SSB_RP		SSB Ês/Iot
		dBm / SCS_{SSB}		dB
		SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz	
Conditions	NR_FDD_FR1_A, NR_TDD_FR1_A	-124	-121	≥ -4
	NR_FDD_FR1_B	-123.5	-120.5	
	NR_TDD_FR1_C	-123	-120	
	NR_FDD_FR1_D, NR_TDD_FR1_D	-122.5	-119.5	
	NR_FDD_FR1_E, NR_TDD_FR1_E	-122	-119	
	NR_FDD_FR1_F	-121.5	-118.5	
	NR_FDD_FR1_G, NR_TDD_FR1_G	-121	-118	
	NR_FDD_FR1_H	-120.5	-117.5	
NOTE 1: NR operating band groups are defined in clause 3.5.2.				

Table B.1.2-2: Conditions for intra-frequency cell re-selection in FR2

Parameter	Angle of arrival	NR operating bands	Minimum SSB_RP Note 2, Note 3						SSB Ês/Iot
			dBm / SCS_{SSB}						dB
			SCS_{SSB} = 120 kHz					SCS_{SSB} = 240 kHz	
			UE Power class					UE Power class	
			1	2	3	4	5	1, 2, 3, 4, 5	
Conditions	Rx Beam Peak	n257	-125.3+Y_1	-110.8	-109.1	-124.8+Y_4	-120.4+Y_5	(Value for SCS_{SSB} = 120 kHz) +3dB	≥-4
		n258	-125.3+Y_1	-110.8	-109.1	-124.8+Y_4	-120.6+Y_5		
		n259			-105.5		-117.5+Y_5		
		n260	-122.3+Y_1		-106.5	-122.8+Y_4			
		n261	-125.3+Y_1	-110.8	-109.1	-124.8+Y_4			
		n262	-120.3+Y_1	-105.6	-103.6	-118.8+Y_4			

Spherical coverage Note 1	n257	-117.3+Z_1	-99.8	-98.2	-115.8+Z_4	-112.4+Z_5	(Value for SCS_{SSB} = 120 kHz) +3dB	≥-4
	n259			-92.7				
	n258	-117.3+Z_1	-99.8	-98.2	-115.8+Z_4	-112.6+Z_5		
	n260	-114.3+Z_1		-93.9	-110.8+Z_4			
	n261	-117.3+Z_1	-99.8	-98.2	-115.8+Z_4			
	n262	-112.1+Z_1	-93.7	-90.5	-106.7+Z_4			

NOTE 1: Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met.
NOTE 2: Values specified at the Reference point to give minimum SSB Ês/Iot, with no applied noise.
NOTE 3: For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by $\Delta MB_{P,n}$ and Spherical coverage values are increased by $\Delta MB_{S,n}$, the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].

Editor's notes for Table B.1.2-2:

- *The value of Y for Power classes 1, 4 and 5 is FFS, where Y_1, Y_4 and Y_5 are the rough/fine beam gain differences in Rx beam peak direction for Power classes 1, 4 and 5 respectively*

- *The value of Z for Power classes 1, 4 and 5 is FFS, where Z_1, Z_4 and Z_5 are the rough/fine beam gain differences in spherical coverage directions for Power classes 1, 4 and 5 respectively*

B.1.3 Conditions for measurements on NR inter-frequency cells for cell re-selection

This clause defines the following conditions for NR inter-frequency measurements performed based on SSBs for cell re-selection: SSB_RP and SSB Ês/Iot, applicable for a corresponding operating band.

The conditions defined in Table B.1.2-1 for FR1 NR intra-frequency cell re-selection shall also apply for FR1 NR inter-frequency cells in this clause.

The conditions defined in Table B.1.2-2 for FR2 NR intra-frequency cell re-selection shall also apply for FR2 NR inter-frequency cells in this clause.

B.1.4 Conditions for measurements on NR intra-frequency cells for cell re-selection for RedCap

This clause defines the following conditions for RedCap NR intra-frequency measurements performed based on SSBs for cell re-selection: SSB_RP and SSB Ês/Iot, applicable for a corresponding operating band.

The conditions are defined in Table B.1.x1-1 and Table B.1.x1-2 for 1 Rx and 2 Rx RedCap respectively for FR1 NR cells.

The conditions are defined in Table B.1.x1-3 for FR2 NR cells.

Table B.1.4-1: Conditions for intra-frequency cell re-selection in FR1 for RedCap for 2Rx

Parameter	NR operating band groups Note1	Minimum SSB_RP		SSB Ês/Iot
		dBm / SCS_{SSB}		
		SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz	dB
Conditions	NR_FDD_RC_FR1_A, NR_TDD_RC_FR1_A	-124	-121	≥ -4
	NR_FDD_RC_FR1_B	-123.5	-120.5	
	NR_FDD_ RC_FR1_C NR_TDD_RC_FR1_C	-123	-120	
	NR_FDD_RC_FR1_D, NR_TDD_RC_FR1_D	-122.5	-119.5	
	NR_FDD_RC_FR1_E, NR_TDD_RC_FR1_E	-122	-119	
	NR_FDD_RC_FR1_F	-121.5	-118.5	
	NR_FDD_RC_FR1_G	-121	-118	
	NR_FDD_RC_FR1_H	-120.5	-117.5	

NOTE 1: NR operating band groups are defined in clause 3.5.2.

Table B.1.4-2: Conditions for intra-frequency cell re-selection in FR1 for RedCap for 1Rx

Parameter	NR operating band groups Note1	Minimum SSB_RP		SSB Ês/Iot
		dBm / SCS_{SSB}		
		SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz	dB
Conditions	NR_FDD_RC_FR1_A, NR_TDD_RC_FR1_A	TBD	TBD	≥ -4
	NR_FDD_RC_FR1_B	TBD	TBD	
	NR_FDD_ RC_FR1_C NR_TDD_RC_FR1_C	TBD	TBD	
	NR_FDD_RC_FR1_D, NR_TDD_RC_FR1_D	TBD	TBD	
	NR_FDD_RC_FR1_E, NR_TDD_RC_FR1_E	TBD	TBD	
	NR_FDD_RC_FR1_F	TBD	TBD	
	NR_FDD_RC_FR1_G	TBD	TBD	
	NR_FDD_RC_FR1_H	TBD	TBD	
NOTE 1: NR operating band groups are defined in clause 3.5.2.				

Table B.1.4-3: Conditions for intra-frequency cell re-selection in FR2 for RedCap

Parameter	Angle of arrival	NR operating bands	Minimum SSB_RP Note 2, Note 3							SSB Ês/Iot
			dBm / SCS_{SSB}							dB
			SCS_{SSB} = 120 kHz						SCS_{SSB} = 240 kHz	
			UE Power class						UE Power class	
			1	2	3	4	5	7	1, 2, 3, 4, 5, 7	
Conditions	Rx Beam Peak	n257	-125.3+Y_1	-110.8	-109.1	-124.8+Y_4	-120.4+Y_5	TBD	(Value for SCS_{SSB} = 120 kHz) +3dB	≥-4
		n258	-125.3+Y_1	-110.8	-109.1	-124.8+Y_4	-120.6+Y_5	TBD		
		n261	-125.3+Y_1	-110.8	-109.1	-124.8+Y_4		TBD		
	Spherical coverage Note 1	n257	-117.3+Z_1	-99.8	-98.2	-115.8+Z_4	-112.4+Z_5	TBD	(Value for SCS_{SSB} = 120 kHz) +3dB	≥-4
		n258	-117.3+Z_1	-99.8	-98.2	-115.8+Z_4	-112.6+Z_5	TBD		
		n261	-117.3+Z_1	-99.8	-98.2	-115.8+Z_4		TBD		
NOTE 1: Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met. NOTE 2: Values specified at the Reference point to give minimum SSB Ês/Iot, with no applied noise. NOTE 3: For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by $\Delta MB_{P,n}$ and Spherical coverage values are increased by $\Delta MB_{S,n}$, the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].										

Editor's notes for Table B.1.2-2:

- *The value of Y for Power classes 1, 4 and 5 is FFS, where Y_1, Y_4 and Y_5 are the rough/fine beam gain differences in Rx beam peak direction for Power classes 1, 4 and 5 respectively*

- *The value of Z for Power classes 1, 4 and 5 is FFS, where Z_1, Z_4 and Z_5 are the rough/fine beam gain differences in spherical coverage directions for Power classes 1, 4 and 5 respectively*

B.1.5 Conditions for measurements on NR inter-frequency cells for cell re-selection for RedCap

This clause defines the following conditions for RedCap NR inter-frequency measurements performed based on SSBs for cell re-selection: SSB_RP and SSB Ês/Iot, applicable for a corresponding operating band.

The conditions defined in Table B.1.4-1 and Table B.1.4-2 for 1 Rx and 2 Rx RedCap respectively for FR1 RedCap NR intra-frequency cell re-selection shall also apply for FR1 RedCap NR inter-frequency cells in this clause.

The conditions defined in Table B.1.4-3 for FR2 RedCap NR intra-frequency cell re-selection shall also apply for FR2 RedCap NR inter-frequency cells in this clause.

B.1.6 Conditions for measurements on NR intra-frequency cells for cell re-selection for satellite access

This clause defines the following conditions for NR intra-frequency measurements performed based on SSBs for cell re-selection: SSB_RP and SSB Ês/Iot, applicable for a corresponding operating band for satellite access.

The conditions are defined in Table B.1.6-1 for FR1 NR cells.

Table B.1.6-1: Conditions for intra-frequency cell re-selection in FR1 for satellite access

Parameter	NR operating band groups Note1	Minimum SSB_RP		SSB Ês/Iot
		dBm / SCS_{SSB}		dB
		SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz	
Conditions	NR_FDD_SAB_FR1_A	-124	-121	≥ -4
NOTE 1: NR operating band groups for satellite access are defined in clause 3.5.2A.				

B.1.7 Conditions for measurements on NR inter-frequency cells for cell re-selection for satellite access

This clause defines the following conditions for NR inter-frequency measurements performed based on SSBs for cell re-selection: SSB_RP and SSB Ês/Iot, applicable for a corresponding operating band for satellite access.

The conditions defined in Table B.1.6-1 for FR1 NR intra-frequency cell re-selection for satellite access shall also apply for FR1 NR inter-frequency cells for satellite access in this clause.

B.2 Conditions for UE measurements procedures and performance requirements in RRC_CONNECTED state

B.2.1 Introduction

B.2.1.1 General

In Annex B.2, the following conditions are specified:

- The conditions for RRC connection release with redirection to NR requirements in clause 6.2.3.2.1,
- The conditions for UE transmit timing adjustment in clause 7.1
- UE conditions which shall apply for UE intra-frequency measurements procedures and requirements in clause 9,

UE conditions which shall apply for UE inter-frequency measurements procedures and requirements in clause 9,

- UE conditions which shall apply for UE intra-frequency measurements performance requirements in clause 10,
- UE conditions which shall apply for UE inter-frequency measurements performance requirements in clause 10.

B.2.1.2 Derivation of Minimum SSB_RP values for FR1

[FFS]

B.2.1.3 Derivation of Minimum SSB_RP values for FR2

Editor's note:

- The Assumption for UE beams (fine or rough) in Annex A RRM test cases is defined based on power class 3, and unless otherwise stated also applies for other UE power classes

B.2.1.3.1 Minimum SSB_RP values for Rx Beam Peak angle of arrival

Minimum SSB_RP values in Tables B.2.2-2 and B.2.3-2 are based on Reference sensitivity for the Operating band and for the UE power class, taking a baseline of UE Power class 3 in Band n260 with 50 MHz channel bandwidth.

Minimum SSB_RP = Reference sensitivity $_{PC3, n260, 50MHz}$ +Y -10Log$_{10}$(PRB$_{Refsens}$ x 12) – SNR$_{Refsens}$ + SSB Ês/Iot + $\Delta MB_{P,n}$

where:

Reference sensitivity $_{PC3, n260, 50MHz}$ is the reference sensitivity value in dBm specified for power class 3 in Band n260 for 50 MHz Channel bandwidth in Table 7.3.2.3-1 of TS 38.101-2 [19];

Y is the gain difference between fine and rough beams, which is defined in Table B.2.1.3.1-1;

Table B.2.1.3.1-1: Gain difference Y between fine and rough beams, Rx beam peak direction

Value "Y" in dB, for each UE power class				
1	**2**	**3**	**4**	**5**
FFS	9.0	7.0	FFS	FFS

PRB$_{Refsens}$ is N_{RB} associated with subcarrier spacing 120 kHz for 50MHz in TS 38.101-2 [19] Table 5.3.2-1, and is 32;

12 is the number of subcarriers in a PRB;

SNR$_{Refsens}$ is the SNR used for simulation of Refsens and EIS spherical coverage, and is -1 dB;

SSB Ês/Iot is the minimum value required by the UE to perform measurements, and is -6 dB for intra-frequency measurements and -4 dB for inter-frequency measurements. The only contribution to Iot is the UE internal noise;

$\Delta MB_{P,n}$ is the UE multi-band relaxation factor value in dB specified in TS 38.101-2 [19] clause 6.2.1.

The calculated Minimum SSB_RP value for the baseline of UE power class 3 in Band n260 is (-109.5+$\Delta MB_{P,n}$) dBm/120kHz for intra-frequency measurements and (-107.5+$\Delta MB_{P,n}$) dBm/120kHz for inter-frequency measurements.

The following methodology to define the Minimum SSB_RP level for power class X (PC_X) and operating band Y (Band_Y) is used:

For Intra-frequency: Minimum SSB_RP (PC_X, Band_Y) = -109.5 dBm/120kHz + Refsens $_{PC_X, Band_Y, 50MHz}$ – Refsens $_{PC3, n260, 50MHz}$ + Y $_{PC_X}$ – Y $_{PC3}$ +$\Delta MB_{P,n}$,

For Inter-frequency: Minimum SSB_RP (PC_X, Band_Y) = -107.5 dBm/120kHz + Refsens $_{PC_X, Band_Y, 50MHz}$ – Refsens $_{PC3, n260, 50MHz}$ + Y $_{PC_X}$ – Y $_{PC3}$ +$\Delta MB_{P,n}$.

B.2.1.3.2 Minimum SSB_RP values for angle of arrival within Spherical coverage

Minimum SSB_RP values in Tables B.2.2-2 and B.2.3-2 are based on EIS spherical coverage for the Operating band and for the UE power class, taking a baseline of UE power class 3 in Band n260 with 50 MHz channel bandwidth.

Minimum SSB_RP = EIS spherical coverage $_{PC3, n260, 50MHz}$ +Z -10Log$_{10}$(PRB$_{Refsens}$ x 12) – SNR$_{Refsens}$ + SSB Ês/Iot + $\Delta MB_{S,n}$

where:

EIS spherical coverage $_{PC3, n260, 50MHz}$ is the EIS spherical coverage value in dBm specified for power class 3 in Band n260 for 50MHz Channel bandwidth in TS 38.101-2 [19] Table 7.3.4.3-1;

Z is the gain difference between fine and rough beams, and is defined in Table B.2.1.3.2-1;

Table B.2.1.3.2-1: Gain difference Z between fine and rough beams, Spherical coverage directions

Value "Z" in dB, for each UE power class				
1	**2**	**3**	**4**	**5**
FFS	9.0	7.0	FFS	FFS

PRB$_{Refsens}$ is N_{RB} associated with subcarrier spacing 120 kHz for 50MHz in TS 38.101-2 [19] Table 5.3.2-1, and is 32;

12 is the number of subcarriers in a PRB;

SNR$_{Refsens}$ is the SNR used for simulation of Refsens and EIS spherical coverage, and is -1 dB;

SSB Ês/Iot is the minimum value required by the UE to perform measurements, and is -6 dB for intra-frequency measurements and -4 dB for inter-frequency measurements. The only contribution to Iot is the UE internal noise;

$\Delta MB_{S,n}$ is the UE multi-band relaxation factor value in dB specified in TS 38.101-2 [19] clause 6.2.1.

The calculated Minimum SSB_RP value for the baseline of UE power class 3 in Band n260 is (-96.9+$\Delta MB_{S,n}$) dBm/120kHz for intra-frequency measurements and is (-94.9+$\Delta MB_{S,n}$) dBm/120kHz for inter-frequency measurements.

The following methodology to define the Minimum SSB_RP level for power class X (PC_X) and operating band Y (Band_Y) is used:

For Intra-frequency: Minimum SSB_RP (PC_X, Band_Y) = -96.9 dBm/120kHz + EIS spherical coverage $_{PC_X, Band_Y, 50MHz}$ – EIS spherical coverage $_{PC3, n260, 50MHz}$ + Z $_{PC_X}$ – Z $_{PC3}$ +$\Delta MB_{S,n}$

For Inter-frequency: Minimum SSB_RP (PC_X, Band_Y) = -94.9 dBm/120kHz + EIS spherical coverage $_{PC_X, Band_Y, 50MHz}$ – EIS spherical coverage $_{PC3, n260, 50MHz}$ + Z $_{PC_X}$ – Z $_{PC3}$ +$\Delta MB_{S,n}$

B.2.1.4 Gain to SS-RSRP and CSI-RSRP measurement point for FR1

In FR1 conducted requirements are specified at the UE antenna connector, which is also the SS-RSRP and CSI-RSRP measurement point.

B.2.1.5 Gain to SS-RSRP and CSI-RSRP measurement point for FR2

B.2.1.5.1 Gain to SS-RSRP and CSI-RSRP measurement point for Rx Beam Peak angle of arrival

In clause 5.1.1 of TS 38.215 [4] SS-RSRP and CSI-RSRP is defined to be measured based on the combined signal from antenna elements corresponding to a given receiver branch. The reference point for requirement parameters from the UE perspective is the input of the UE antenna array. The gain "G" relates the combined signal from antenna elements corresponding to a given receiver branch to the reference point for requirement parameters.

The gain "G" affects absolute signal level values reported by the UE.

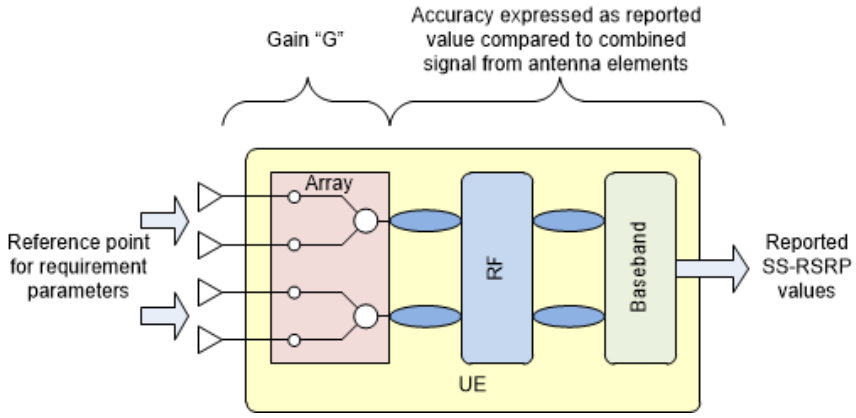

Figure B.2.1.5.1-1: Gain and Reference point for requirement parameters

The gain range for each power class is specified in Table B.2.1.5.1-1.

Table B.2.1.5.1-1: UE gain G, Rx beam peak direction

	UE Power class				
	1	**2**	**3**	**4**	**5**
Minimum, dBi	FFS	FFS	-10	FFS	FFS
Maximum, dBi	FFS	FFS	+20	FFS	FFS

Gain range in spherical coverage directions may be lower than in Rx beam peak direction, according to the difference between the EIS spherical coverage value specified in TS 38.101-2 [19] clause 7.3.4 and the Reference sensitivity level specified in TS 38.101-2 [19] clause 7.3.2.

B.2.1.5.2 Gain to SS-RSRP measurement point for different frequency

In any specific direction, the UE gain G may be different depending on frequencies. The gain "G_{inter}" affects relative signal level values reported by the UE when measuring between different frequencies and is specified in Table B.2.1.5.2-1 for each power class.

Table B.2.1.5.2-1: UE gain difference between inter-frequencies G_{inter}

	UE Power class			
	1	**2**	**3**	**4**
Maximum difference, dB	FFS	FFS	3	FFS

B.2.1.5.3 Alignment of Rough beam to Rx beam Peak

The definition of Rx Beam Peak in TS 38.101-2 [19] clause 7.3.2 is based on Throughput at Reference sensitivity power level, and assumes use of Fine beams. In many RRM scenarios the UE can use Rough beams, but the largest Rough beam gain direction may not be aligned to the Fine beam Peak direction.

When the Rx Beam Peak is selected and defined based on Fine Beams, the rough beam gain in that direction may be lower than the largest rough beam gain in another direction within Spherical Coverage. The term "D" is the maximum allowed rough beam gain reduction, and is specified in Table B.2.1.5.3-1 for each power class.

Table B.2.1.5.3-1: Rough Beam gain reduction "D" in Rx Beam Peak direction

	UE Power class			
	1	**2**	**3**	**4**
Maximum gain reduction, dB	FFS	FFS	5.5	FFS

B.2.1.6 Gain to PRS-RSRP measurement point for FR2

B.2.1.6.1 Gain to PRS-RSRP measurement point for Rx Beam Peak angle of arrival

In clause 5.1.28 of TS 38.215 [4] PRS-RSRP is defined to be measured based on the combined signal from antenna elements corresponding to a given receiver branch. The reference point for requirement parameters from the UE perspective is the input of the UE antenna array. The gain "G" relates the combined signal from antenna elements corresponding to a given receiver branch to the reference point for requirement parameters.

The gain "G" affects absolute signal level values reported by the UE.

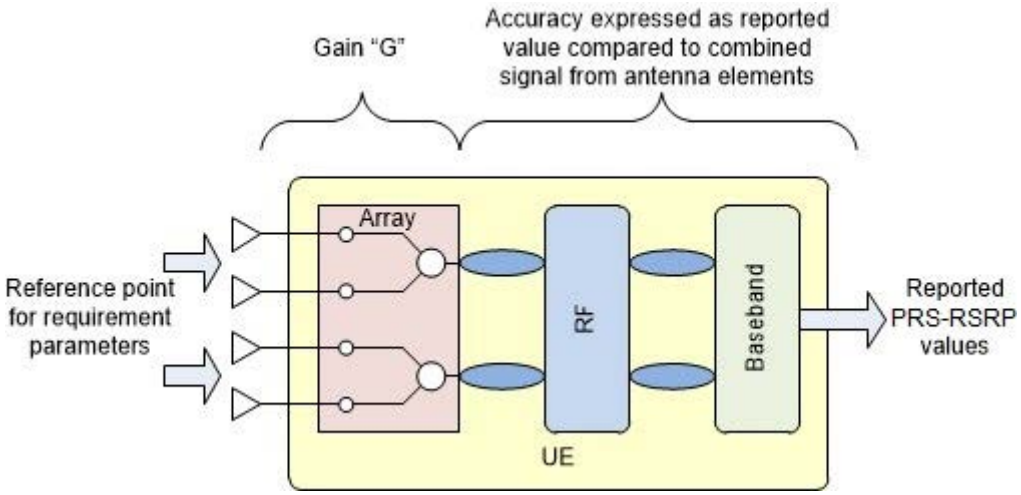

Figure B.2.1.6.1-1: Gain and Reference point for requirement parameters

The gain range for each power class is specified in Table B.2.1.61-1.

Table B.2.1.6.1-1: UE gain G, Rx beam peak direction

	UE Power class			
	1	2	3	4
Minimum, dBi	FFS	FFS	-10	FFS
Maximum, dBi	FFS	FFS	+20	FFS

Gain range in spherical coverage directions may be lower than in Rx beam peak direction, according to the difference between the EIS spherical coverage value specified in TS 38.101-2 [19] clause 7.3.4 and the Reference sensitivity level specified in TS 38.101-2 [19] clause 7.3.2.

B.2.2 Conditions for NR intra-frequency measurements

This clause defines the following conditions for NR intra-frequency measurements and corresponding procedures performed based on SSBs: SSB_RP and SSB Ês/Iot, applicable for a corresponding operating band.

The conditions are defined in Table B.2.2-1 for FR1 NR cells.

The conditions are defined in Table B.2.2-2 for FR2 NR cells.

Table B.2.2-1: Conditions for intra-frequency measurements in FR1

Parameter	NR operating band groups [Note1]	Minimum SSB_RP		SSB Ês/Iot
		dBm / SCS_{SSB}		
		SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz	dB
Conditions	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-127	-124	≥ -6
	NR_FDD_FR1_B	-126.5	-123.5	
	NR_TDD_FR1_C	-126	-123	
	NR_FDD_FR1_D, NR_TDD_FR1_D	-125.5	-122.5	

	NR_FDD_FR1_E, NR_TDD_FR1_E	-125	-122	
	NR_FDD_FR1_F	-124.5	-121.5	
	NR_FDD_FR1_G, NR_TDD_FR1_G	-124	-121	
	NR_FDD_FR1_H	-123.5	-120.5	
NOTE 1: NR operating band groups are defined in clause 3.5.2.				

Table B.2.2-2: Conditions for intra-frequency measurements in FR2

Parameter	Angle of arrival	NR operating bands	Minimum SSB_RP Note 2, Note 3						SSB Ês/Iot
			dBm / SCS_{SSB}						dB
			SCS_{SSB} = 120 kHz					SCS_{SSB} = 240 kHz	
			UE Power class					UE Power class	
			1	2	3	4	5	1, 2, 3, 4, 5	
Conditions	Rx Beam Peak	n257	-128.3+Y_1	-113.8	-112.1	-127.8+Y_4	-123.4+Y_5	(Value for SCS_{SSB} = 120 kHz) +3dB	≥-6
		n258	-128.3+Y_1	-113.8	-112.1	-127.8+Y_4	-123.6+Y_5		
		n259			-108.5		-120.5+Y_5		
		n260	-125.3+Y_1		-109.5	-125.8+Y_4			
		n261	-128.3+Y_1	-113.8	-112.1	-127.8+Y_4			
		n262	-123.3+Y_1	-108,6	-106.6	-121.8+Y_4			
	Spherical coverage Note 1	n257	-120.3+Z_1	-102.8	-101.2	-118.8+Z_4	-115.4+Z_5	(Value for SCS_{SSB} = 120 kHz) +3dB	≥-6
		n258	-120.3+Z_1	-102.8	-101.2	-118.8+Z_4	-115.6+Z_5		
		n259			-95.7				
		n260	-117.3+Z_1		-96.9	-113.8+Z_4			
		n261	-120.3+Z_1	-102.8	-101.2	-118.8+Z_4			
		n262	-115.1+Z_1	-96.7	-93.5	-109.7+Z_4			

Note 1: Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met.
Note 2: Values specified at the Reference point to give minimum SSB Ês/Iot, with no applied noise.
Note 3: For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by $\Delta MB_{P,n}$ and Spherical coverage values are increased by $\Delta MB_{S,n}$, the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].

Editor's notes for Table B.2.2-2:

- *The value of Y for power classes 1, 4 and 5 is FFS, where Y_1, Y_4 and Y_5 are the rough/fine beam gain differences in Rx beam peak direction for power classes 1, 4 and 5 respectively*

- *The value of Z for power classes 1, 4 and 5 is FFS, where Z_1, Z_4 and Z_5 are the rough/fine beam gain differences in spherical coverage directions for power classes 1, 4 and 5 respectively*

B.2.3 Conditions for NR inter-frequency measurements

This clause defines the following conditions for NR inter-frequency measurements and corresponding procedures performed based on SSBs: SSB_RP and SSB Ês/Iot, applicable for a corresponding operating band.

The conditions are defined in Table B.2.3-1 for FR1 NR cells.

The conditions are defined in Table B.2.3-2 for FR2 NR cells.

Table B.2.3-1: Conditions for inter-frequency measurements in FR1

Parameter	NR operating band groups Note1	Minimum SSB_RP		SSB Ês/Iot
		dBm / SCS_{SSB}		dB
		SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz	
Conditions	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-125	-122	≥ -4
	NR_FDD_FR1_B	-124.5	-121.5	
	NR_TDD_FR1_C	-124	-121	
	NR_FDD_FR1_D, NR_TDD_FR1_D	-124.5	-120.5	

	NR_FDD_FR1_E, NR_TDD_FR1_E	-123	-120
	NR_FDD_FR1_F	-122.5	-119.5
	NR_FDD_FR1_G, NR_TDD_FR1_G	-122	-119
	NR_FDD_FR1_H	-121.5	-118.5
NOTE 1: NR operating band groups are defined in clause 3.5.2.			

Table B.2.3-2: Conditions for inter-frequency measurements in FR2

Parameter	Angle of arrival	NR operating bands	Minimum SSB_RP Note 2, Note 3						SSB Ês/Iot
			dBm / SCS_{SSB}						dB
			SCS_{SSB} = 120 kHz					SCS_{SSB} = 240 kHz	
			UE Power class					UE Power class	
			1	2	3	4	5	1, 2, 3, 4, 5	
Conditions	Rx Beam Peak	n257	-126.3+Y_1	-111.8	-110.1	-125.8+Y_4	-121.4+Y_5	(Value for SCS_{SSB} = 120 kHz) +3dB	≥-4
		n258	-126.3+Y_1	-111.8	-110.1	-125.8+Y_4	-121.6+Y_5		
		n259			-106.5		-118.5+Y_5		
		n260	-123.3+Y_1		-107.5	-123.8+Y_4			
		n261	-126.3+Y_1	-111.8	-110.1	-125.8+Y_4			
		n262	-121.3+Y_1	-106.6	-104.6	-119.8+Y_4			
	Spherical coverage Note 1	n257	-118.3+Z_1	-100.8	-99.2	-116.8+Z_4	-113.4+Z_5	(Value for SCS_{SSB} = 120 kHz) +3dB	≥-4
		n258	-118.3+Z_1	-100.8	-99.2	-116.8+Z_4	-113.6+Z_5		
		n259			-93.7				
		n260	-115.3+Z_1		-94.9	-111.8+Z_4			
		n261	-118.3+Z_1	-100.8	-99.2	-116.8+Z_4			
		n262	-113.1+Z_1	-94.7	-91.5	-107.7+Z_4			

NOTE 1: Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met.
NOTE 2: Values specified at the Reference point to give minimum SSB Ês/Iot, with no applied noise.
NOTE 3: For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by $\Delta MB_{P,n}$ and Spherical coverage values are increased by $\Delta MB_{S,n}$, the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].

Editor's notes for Table B.2.3-2:

- *The value of Y for power classes 1, 4 and 5 is FFS, where Y_1, Y_4 and Y_5 are the rough/fine beam gain differences in Rx beam peak direction for power classes 1, 4 and 5 respectively*

- *The value of Z for power classes 1, 4 and 5 is FFS, where Z_1, Z_4 and Z_5 are the rough/fine beam gain differences in spherical coverage directions for power classes 1, 4 and 5 respectively*

B.2.4 Conditions for NR L1-RSRP reporting

B.2.4.1 Conditions for SSB based L1-RSRP reporting

This clause defines the following conditions for NR L1-RSRP measurement reporting and corresponding procedures performed based on SSBs: SSB_RP and SSB Ês/Iot, applicable for a corresponding operating band.

The conditions are defined in Table B.2.4.1-1 for FR1 NR cells.

The conditions are defined in Table B.2.4.1-2 for FR2 NR cells.

Table B.2.4.1-1: Conditions for SSB based L1-RSRP measurements in FR1

Parameter	NR operating band groups Note1	Minimum SSB_RP		SSB Ês/Iot
		dBm / SCS_{SSB}		dB
		SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz	
Conditions	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-124	-121	≥ -3
	NR_FDD_FR1_B	-123.5	-120.5	

NR_TDD_FR1_C	-123	-120
NR_FDD_FR1_D, NR_TDD_FR1_D	-122.5	-119.5
NR_FDD_FR1_E, NR_TDD_FR1_E	-122	-119
NR_FDD_FR1_F	-121.5	-118.5
NR_FDD_FR1_G, NR_TDD_FR1_G	-121	-118
NR_FDD_FR1_H	-120.5	-117.5

NOTE 1: NR operating band groups are defined in clause 3.5.2.

Table B.2.4.1-2: Conditions for SSB based L1-RSRP measurements in FR2

Parameter	Angle of arrival	NR operating bands	Minimum SSB_RP Note 2, Note 3						SSB Ês/Iot
			dBm / SCS_{SSB}						dB
			SCS_{SSB} = 120 kHz					SCS_{SSB} = 240 kHz	
			UE Power class					UE Power class	
			1	2	3	4	5	1, 2, 3, 4, 5	
Conditions	Rx Beam Peak	n257	-125.3+Y_1	-110.8	-109.1	-124.8+Y_4	-120.4+Y_5	(Value for SCS_{SSB} = 120 kHz) +3dB	≥-3
		n258	-125.3+Y_1	-110.8	-109.1	-124.8+Y_4	-120.6+Y_5		
		n259			-105.5		-117.5+Y_5		
		n260	-122.3+Y_1		-106.5	-122.8+Y_4			
		n261	-125.3+Y_1	-110.8	-109.1	-124.8+Y_4			
		n262	-120.3+Y_1	-105.6	-103.6	-118.8+Y_4			
	Spherical coverage Note 1	n257	-117.3+Z_1	-99.8	-98.2	-115.8+Z_4	-112.4+Z_5	(Value for SCS_{SSB} = 120 kHz) +3dB	≥-3
		n258	-117.3+Z_1	-99.8	-98.2	-115.8+Z_4	-112.6+Z_5		
		n259			-92.7				
		n260	-114.3+Z_1		-93.9	-110.8+Z_4			
		n261	-117.3+Z_1	-99.8	-98.2	-115.8+Z_4			
		n262	-112.3+Z_1	-93.7	-90.5	-106.7+Z_4			

NOTE 1: Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met.
NOTE 2: Values specified at the Reference point to give minimum SSB Ês/Iot, with no applied noise.
NOTE 3: For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by $\Delta MB_{P,n}$ and Spherical coverage values are increased by $\Delta MB_{S,n}$, the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].

Editor's notes for Table B.2.4.1-2:

- *The value of Y for power classes 1, 4 and 5 is FFS, where Y_1, Y_4 and Y_5 are the rough/fine beam gain differences in Rx beam peak direction for power classes 1, 4 and 5 respectively*

- *The value of Z for power classes 1, and 4 and 5 is FFS, where Z_1, Z_4 and Z_5 are the rough/fine beam gain differences in spherical coverage directions for power classes 1, 4 and 5 respectively*

B.2.4.2 Conditions for CSI-RS based L1-RSRP reporting

This clause defines the following conditions for NR L1-RSRP measurement reporting and corresponding procedures performed based on CSI-RS: CSI-RS_RP and CSI-RS Ês/Iot, applicable for a corresponding operating band.

The conditions are defined in Table B.2.4.2-1 for FR1 NR cells.

The conditions are defined in Table B.2.4.2-2 for FR2 NR cells.

Table B.2.4.2-1: Conditions for CSI-RS based L1-RSRP measurements in FR1

Parameter	NR operating band groups Note1	Minimum CSI-RS_RP			CSI-RS Ês/Iot
		dBm / SCS_{CSI-RS}			dB
		SCS_{CSI-RS} = 15 kHz	SCS_{CSI-RS} = 30 kHz	SCS_{CSI-RS} = 60 kHz	

Conditions	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-124	-121	-118	≥ -3
	NR_FDD_FR1_B	-123.5	-120.5	-117.5	
	NR_TDD_FR1_C	-123	-120	-117	
	NR_FDD_FR1_D, NR_TDD_FR1_D	-122.5	-119.5	-116.5	
	NR_FDD_FR1_E, NR_TDD_FR1_E	-122	-119	-116	
	NR_FDD_FR1_F	-121.5	-118.5	-115.5	
	NR_FDD_FR1_G, NR_TDD_FR1_G	-121	-118	-115	
	NR_FDD_FR1_H	-120.5	-117.5	-114.5	
NOTE 1: NR operating band groups are defined in clause 3.5.2.					

Table B.2.4.2-2: Conditions for CSI-RS based L1-RSRP measurements in FR2

Parameter	Angle of arrival	NR operating bands	Minimum CSI-RS_RP Note 2, Note 3						CSI-RS Ês/Iot
			dBm / SCS_{CSI-RS}						dB
			SCS_{CSI-RS} = 60 kHz					SCS_{CSI-RS} = 120 kHz	
			UE Power class					UE Power class	
			1	2	3	4	5	1, 2, 3, 4, 5	
Conditions	Rx Beam Peak	n257	-128.3+Y_1	-113.8	-112.1	-127.8+Y_4	-123.4+Y_5	(Value for SCS_{CSI-RS} = 60 kHz) +3dB	≥-3
		n258	-128.3+Y_1	-113.8	-112.1	-127.8+Y_4	-123.6+Y_5		
		n259			-108.5		-120.5+Y_5		
		n260	-125.3+Y_1		-109.5	-125.8+Y_4			
		n261	-128.3+Y_1	-113.8	-112.1	-127.8+Y_4			
		n262	-123.3+Y_1	-108.6	-106.6	-121.8+Y_4			
	Spherical coverage Note 1	n257	-120.3+Z_1	-102.8	-101.2	-118.8+Z_4	-115.4+Z_5	(Value for SCS_{CSI-RS} = 60 kHz) +3dB	≥-3
		n258	-120.3+Z_1	-102.8	-101.2	-118.8+Z_4	-115.6+Z_5		
		n259			-95.7				
		n260	-117.3+Z_1		-96.9	-113.8+Z_4			
		n261	-120.3+Z_1	-102.8	-101.2	-118.8+Z_4			
		n262	-115.1+Z_1	-96.7	-93.5	-109.7+Z_4			

NOTE 1: Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met.
NOTE 2: Values specified at the Reference point to give minimum CSI-RS Ês/Iot, with no applied noise.
NOTE 3: For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by $\Delta MB_{P,n}$ and Spherical coverage values are increased by $\Delta MB_{S,n}$, the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].

Editor's notes for Table B.2.4.2-2:

- *The value of Y for power classes 1, 4 and 5 is FFS, where Y_1, Y_4 and Y_5 are the rough/fine beam gain differences in Rx beam peak direction for power classes 1, 4 and 5 respectively*

- *The value of Z for power classes 1, 4 and 5 is FFS, where Z_1, Z_4 and Z_5 are the rough/fine beam gain differences in spherical coverage directions for power classes 1, 4 and 5 respectively*

B.2.5 Conditions for RRC connection release with redirection to NR

This clause defines the following conditions for RRC connection release with redirection to NR: SSB_RP and SSB Ês/Iot, applicable for a corresponding operating band.

The conditions are defined in Table B.2.5-1 for FR1 NR cells.

The conditions are defined in Table B.2.5-2 for FR2 NR cells.

Table B.2.5-1: Conditions for for RRC connection release with redirection to NR in FR1

Parameter	NR operating band groups Note1	Minimum SSB_RP		SSB Ês/Iot
		dBm / SCS_{SSB}		dB
		SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz	
Conditions	NR_FDD_FR1_A, NR_TDD_FR1_A	-125	-122	≥ -4
	NR_FDD_FR1_B	-124.5	-121.5	
	NR_TDD_FR1_C	-124	-121	
	NR_FDD_FR1_D, NR_TDD_FR1_D	-124.5	-120.5	
	NR_FDD_FR1_E, NR_TDD_FR1_E	-123	-120	
	NR_FDD_FR1_F	-122.5	-119.5	
	NR_FDD_FR1_G, NR_TDD_FR1_G	-122	-119	
	NR_FDD_FR1_H	-121.5	-118.5	
NOTE 1: NR operating band groups are defined in clause 3.5.2.				

Table B.2.5-2: Conditions for RRC connection release with redirection to NR in FR2

Parameter	Angle of arrival	NR operating bands	Minimum SSB_RP Note 2, Note 3						SSB Ês/Iot
			dBm / SCS_{SSB}						dB
			SCS_{SSB} = 120 kHz					SCS_{SSB} = 240 kHz	
			UE Power class					UE Power class	
			1	2	3	4	5	1, 2, 3, 4, 5	
Conditions	Rx Beam Peak	n257	-126.3+Y_1	-111.8	-110.1	-125.8+Y_4	-121.4+Y_5	(Value for SCS_{SSB} = 120 kHz) +3dB	≥-4
		n258	-126.3+Y_1	-111.8	-110.1	-125.8+Y_4	-121.6+Y_5		
		n259			-106.5		-118.5+Y_5		
		n260	-123.3+Y_1		-107.5	-123.8+Y_4			
		n261	-126.3+Y_1	-111.8	-110.1	-125.8+Y_4			
		n262	-121.3+Y_1	-106.6	-104.6	-119.8+Y_4			
	Spherical coverage Note 1	n257	-118.3+Z_1	-100.8	-99.2	-116.8+Z_4	-113.4+Z_5	(Value for SCS_{SSB} = 120 kHz) +3dB	≥-4
		n258	-118.3+Z_1	-100.8	-99.2	-116.8+Z_4	-113.6+Z_5		
		n259			-93.7				
		n260	-115.3+Z_1		-94.9	-111.8+Z_4			
		n261	-118.3+Z_1	-100.8	-99.2	-116.8+Z_4			
		n262	-113.1+Z_1	-94.7	-91.5	-107.7+Z_4			

NOTE 1: Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met.
NOTE 2: Values specified at the Reference point to give minimum SSB Ês/Iot, with no applied noise.
NOTE 3: For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by $\Delta MB_{P,n}$ and Spherical coverage values are increased by $\Delta MB_{S,n}$, the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].

Editor's notes for Table B.2.5.2-2:

- The value of Y for power classes 1, 4 and 5 is FFS, where Y_1, Y_4 and Y_5 are the rough/fine beam gain differences in Rx beam peak direction for power classes 1, 4 and 5 respectively

- The value of Z for power classes 1, 4 and 5 is FFS, where Z_1, Z_4 and Z_5 are the rough/fine beam gain differences in spherical coverage directions for power classes 1, 4 and 5 respectively

B.2.6 Void

B.2.6.1 Void

Table B.2.6.1-1: Void

Table B.2.6.1-2: Void

B.2.6.2 Void

B.2.7 Conditions for SRS-RSRP measurements

This clause defines the following conditions for SRS-RSRP measurement and corresponding procedures performed based on SRSs: SRS_RP and SRS Ês/Iot, applicable for a corresponding operating band.

The conditions are defined in Table B.2.7-1 for FR1 NR cells.

The conditions are defined in Table B.2.7-2 for FR2 NR cells.

Table B.2.7-1: Conditions for SRS-RSRP measurements in FR1

Parameter	NR operating band groups Note1	Minimum SRS_RP			SRS Ês/Iot
		dBm / SCS_{SRS}			dB
		SCS_{SRS} = 15 kHz	SCS_{SRS} = 30 kHz	SCS_{SRS} = 60 kHz	
Conditions	NR_TDD_FR1_A	-120	-117	-114	≥ 1
	NR_TDD_FR1_C	-119	-116	-113	
	NR_TDD_FR1_D	-118.5	-115.5	-112.5	
	NR_TDD_FR1_E	-118	-115	-112	
	NR_TDD_FR1_F	-117.5	-114.5	-111.5	
	NR_TDD_FR1_G	-117	-114	-111	
NOTE 1: NR operating band groups are defined in clause 3.5.2.					

Table B.2.7-2: Conditions for SRS-RSRP measurements in FR2

Parameter	Angle of arrival	NR operating bands	Minimum SRS_RP Note 2, Note 3						SRS Ês/Iot
			dBm / SCS_{SRS}						dB
			SCS_{SRS} = 60 kHz					SCS_{SRS} = 120 kHz	
			UE Power class					UE Power class	
			1	2	3	4	5	1, 2, 3, 4, 5	
Conditions	Rx Beam Peak	n257	-124.5	-119.0	-115.3	-124.0	-119.6	(Value for SCS_{SRS} = 60 kHz) +3dB	≥1
		n258	-124.5	-119.0	-115.3	-124.0	-119.8		
		n260	-121.5		-112.7	-122.0			
		n261	-124.5	-119.0	-115.3	-124.0			
	Spherical coverage Note 1	n257	-116.5	-108.0	-104.4	-115.0	-111.6	(Value for SCS_{SRS} = 60 kHz) +3dB	≥1
		n258	-116.5	-108.0	-104.4	-115.0	-111.8		
		n260	-113.5		-100.1	-110.0			
		n261	-116.5	-108.0	-104.4	-115.0			
NOTE 1: Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met. NOTE 2: Values specified at the Reference point to give minimum SRS Ês/Iot, with no applied noise. NOTE 3: For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by $\Delta MB_{P,n}$ and Spherical coverage values are increased by $\Delta MB_{S,n}$, the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].										

B.2.8 Conditions for NR L1-SINR reporting

B.2.8.1 Conditions for L1-SINR reporting with CSI-RS based CMR and no dedicated IMR configured

This clause defines the following conditions for NR L1-SINR measurement reporting and corresponding procedures performed based on CSI-RSs: CSI-RS_RP and CSI-RS Ês/Iot, applicable for a corresponding operating band.

The conditions defined in Table B.2.8.1-1 for FR1 NR cells.

The conditions defined in Table B.2.8.1-2 for FR2 NR cells.

Table B.2.8.1-1: Conditions for L1-SINR measurements with CSI-RS based CMR only in FR1

Parameter	NR operating band groups Note1	Minimum CSI-RS_RP			CSI-RS CMR Ês/Iot
		dBm / SCS_{CSI-RS}			dB
		SCS_{CSI-RS} = 15 kHz	SCS_{CSI-RS} = 30 kHz	SCS_{CSI-RS} = 60 kHz	
Conditions	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-124	-121	-118	≥ -3
	NR_FDD_FR1_B	-123.5	-120.5	-117.5	
	NR_TDD_FR1_C	-123	-120	-117	
	NR_FDD_FR1_D, NR_TDD_FR1_D	-122.5	-119.5	-116.5	
	NR_FDD_FR1_E, NR_TDD_FR1_E	-122	-119	-116	
	NR_FDD_FR1_F	-121.5	-118.5	-115.5	
	NR_FDD_FR1_G, NR_TDD_FR1_G	-121	-118	-115	
	NR_FDD_FR1_H	-120.5	-117.5	-114.5	
NOTE 1: NR operating band groups are defined in clause 3.5.2.					

Table B.2.8.1-2: Conditions for L1-SINR measurements with CSI-RS based CMR only in FR2

Parameter	Angle of arrival	NR operating bands	Minimum CSI-RS_RP Note 2, Note 3					CSI-RS CMR Ês/Iot
			dBm / SCS_{CSI-RS}					dB
			SCS_{CSI-RS} = 60 kHz					SCS_{CSI-RS} = 120 kHz
			UE Power class					UE Power class
			1	2	3	4	5	1, 2, 3, 4, 5
Conditions	Rx Beam Peak	n257	-128.3+Y_1	-113.8	-112.1	-127.8+Y_4	-123.4+Y_5	(Value for SCS_{CSI-RS} = 60 kHz) +3dB
		n258	-128.3+Y_1	-113.8	-112.1	-127.8+Y_4	-123.6+Y_5	
		n259			-108.5		-120.5+Y_5	
		n260	-125.3+Y_1		-109.5	-125.8+Y_4		
		n261	-128.3+Y_1	-113.8	-112.1	-127.8+Y_4		
	Spherical coverage Note 1	n257	-120.3+Z_1	-102.8	-101.2	-118.8+Z_4	-115.4+Z_5	(Value for SCS_{CSI-RS} = 60 kHz) +3dB
		n258	-120.3+Z_1	-102.8	-101.2	-118.8+Z_4	-115.6+Z_5	
		n259			-95.7		-112.5+Z_5	
		n260	-117.3+Z_1		-96.9	-113.8+Z_4		
		n261	-120.3+Z_1	-102.8	-101.2	-118.8+Z_4		

								≥-3

NOTE 1: Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met.
NOTE 2: Values specified at the Reference point to give minimum CSI-RS Ês/Iot, with no applied noise.
NOTE 3: For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by $\Delta MB_{P,n}$ and Spherical coverage values are increased by $\Delta MB_{S,n}$, the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].

B.2.8.2 Conditions for L1-SINR reporting with SSB based CMR and dedicated IMR configured

B.2.8.2.1 L1-SINR reporting with SSB based CMR and dedicated ZP-IMR configured

This clause defines the following conditions for NR L1-SINR measurement reporting and corresponding procedures performed based on SSBs and ZP-IMRs: SSB_RP and SSB Ês/Iot, applicable for a corresponding operating band.

The conditions defined in Table B.2.8.2.1-1 for FR1 NR cells.

The conditions defined in Table B.2.8.2.1-2 for FR2 NR cells.

Table B.2.8.2.1-1: Conditions for L1-SINR measurements with SSB based CMR and ZP-IMR in FR1

Parameter	NR operating band groups Note1	Minimum SSB_RP		SSB Ês/Iot
		dBm / SCS_{SSB}		
		SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz	dB

Conditions	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-124	-121	≥ -3
	NR_FDD_FR1_B	-123.5	-120.5	
	NR_TDD_FR1_C	-123	-120	
	NR_FDD_FR1_D, NR_TDD_FR1_D	-122.5	-119.5	
	NR_FDD_FR1_E, NR_TDD_FR1_E	-122	-119	
	NR_FDD_FR1_F	-121.5	-118.5	
	NR_FDD_FR1_G, NR_TDD_FR1_G	-121	-118	
	NR_FDD_FR1_H	-120.5	-117.5	
NOTE 1: NR operating band groups are defined in clause 3.5.2.				

Table B.2.8.2.1-2: Conditions for L1-SINR measurements with SSB based CMR and ZP-IMR in FR2

Parameter	**Angle of arrival**	**NR operating bands**	**Minimum SSB_RP** Note 2, Note 3						**SSB Ês/Iot**
			dBm / SCS_{SSB}						**dB**
			SCS_{SSB} = 120 kHz					**SCS_{SSB} = 240 kHz**	
			UE Power class					**UE Power class**	
			1	**2**	**3**	**4**	**5**	**1, 2, 3, 4, 5**	
Conditions	Rx Beam Peak	n257	-125.3+Y_1	-110.8	-109.1	-124.8+Y_4	-120.4+Y_5	(Value for SCS_{SSB} = 120 kHz) +3dB	≥-3
		n258	-125.3+Y_1	-110.8	-109.1	-124.8+Y_4	-120.6+Y_5		
		n259			-105.5		-117.5+Y_5		
		n260	-122.3+Y_1		-106.5	-122.8+Y_4			
		n261	-125.3+Y_1	-110.8	-109.1	-124.8+Y_4			
	Spherical coverage Note 1	n257	-117.3+Z_1	-99.8	-98.2	-115.8+Z_4	-112.4+Z_5	(Value for SCS_{SSB} = 120 kHz) +3dB	≥-3
		n258	-117.3+Z_1	-99.8	-98.2	-115.8+Z_4	-112.6+Z_5		
		n259			-92.7		-109.5+Z_5		
		n260	-114.3+Z_1		-93.9	-110.8+Z_4			
		n261	-117.3+Z_1	-99.8	-98.2	-115.8+Z_4			

NOTE 1: Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met.
NOTE 2: Values specified at the Reference point to give minimum SSB Ês/Iot, with no applied noise.
NOTE 3: For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by $\Delta MB_{P,n}$ and Spherical coverage values are increased by $\Delta MB_{S,n}$, the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].

B.2.8.2.2 L1-SINR reporting with SSB based CMR and dedicated NZP-IMR configured

This clause defines the following conditions for NR L1-SINR measurement reporting and corresponding procedures performed based on SSBs and NZP-IMRs: SSB_RP, SSB Ês/Iot and NZP-IMR Ês/Iot, applicable for a corresponding operating band.

The conditions are defined in Table B.2.8.2.2-1 for FR1 NR cells.

The conditions are defined in Table B.2.8.2.2-2 for FR2 NR cells.

Table B.2.8.2.2-1: Conditions for L1-SINR measurements with SSB based CMR and NZP-IMR in FR1

Parameter	**NR operating band groups** Note1	**Minimum SSB_RP**		**SSB Ês/Iot**	**NZP-IMR Ês/Iot**
		dBm / SCS_{SSB}		**dB**	**dB**
		SCS_{SSB} = 15 kHz	**SCS_{SSB} = 30 kHz**		
Conditions	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	≥ 0	≥ 0
	NR_FDD_FR1_B	-120.5	-117.5		
	NR_TDD_FR1_C	-120	-117		
	NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5		
	NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116		
	NR_FDD_FR1_F	-118.5	-115.5		
	NR_FDD_FR1_G, NR_TDD_FR1_G	-118	-115		
	NR_FDD_FR1_H	-117.5	-114.5		

NOTE 1: NR operating band groups are defined in clause 3.5.2.

Table B.2.8.2.2-2: Conditions for L1-SINR measurements with SSB based CMR and NZP-IMR in FR2

Parameter	Angle of arrival	NR operating bands	Minimum SSB_RP Note 2, Note 3						SSB Ês/Iot	NZP-IMR Ês/Iot
			dBm / SCS_{SSB}						dB	dB
			SCS_{SSB} = 120 kHz					SCS_{SSB} = 240 kHz		
			UE Power class					UE Power class		
			1	2	3	4	5	1, 2, 3, 4, 5		
Conditions	Rx Beam Peak	n257	-122.3+Y_1	-107.8	-106.1	-121.8+Y_4	-117.4+Y_5	(Value for SCS_{SSB} = 120 kHz) +3dB	≥0	≥0
		n258	-122.3+Y_1	-107.8	-106.1	-121.8+Y_4	-117.6+Y_5			
		n259			-102.5		-114.5+Y_5			
		n260	-119.3+Y_1		-103.5	-119.8+Y_4				
		n261	-122.3+Y_1	-107.8	-106.1	-121.8+Y_4				
	Spherical coverage Note 1	n257	-114.3+Z_1	-96.8	-95.2	-112.8+Z_4	-109.4+Z_5	(Value for SCS_{SSB} = 120 kHz) +3dB	≥0	≥0
		n258	-114.3+Z_1	-96.8	-95.2	-112.8+Z_4	-109.6+Z_5			
		n259			-88.7		-106.5+Z_5			
		n260	-111.3+Z_1		-90.9	-107.8+Z_4				
		n261	-114.3+Z_1	-96.8	-95.2	-112.8+Z_4				

NOTE 1: Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met.
NOTE 2: Values specified at the Reference point to give minimum SSB Ês/Iot, with no applied noise.
NOTE 3: For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by $\Delta MB_{P,n}$ and Spherical coverage values are increased by $\Delta MB_{S,n}$, the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].

Editor's notes for Table B.2.8.2.2-2:

- *The value of Y for power classes 1, 4 and 5 is FFS, where Y_1, Y_4 and Y_5 are the rough/fine beam gain differences in Rx beam peak direction for power classes 1, 4 and 5 respectively*

- *The value of Z for power classes 1, and 4 and 5 is FFS, where Z_1, Z_4 and Z_5 are the rough/fine beam gain differences in spherical coverage directions for power classes 1, 4 and 5 respectively*

B.2.8.3 Conditions for L1-SINR reporting with CSI-RS based CMR and dedicated IMR configured

B.2.8.3.1 L1-SINR reporting with CSI-RS based CMR and dedicated ZP-IMR configured

This clause defines the following conditions for NR L1-SINR measurement reporting and corresponding procedures performed based on CSI-RSs and ZP-IMRs: CSI-RS_RP and CSI-RS Ês/Iot, applicable for a corresponding operating band.

The conditions defined in Table B.2.8.3.1-1 for FR1 NR cells.

The conditions defined in Table B.2.8.3.1-2 for FR2 NR cells.

Table B.2.8.3.1-1: Conditions for L1-SINR measurements with CSI-RS based CMR and ZP-IMR in FR1

Parameter	NR operating band groups Note1	Minimum CSI-RS_RP			CSI-RS Ês/Iot
		dBm / SCS_{CSI-RS}			dB
		SCS_{CSI-RS} = 15 kHz	SCS_{CSI-RS} = 30 kHz	SCS_{CSI-RS} = 60 kHz	
Conditions	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-124	-121	-118	≥ -3
	NR_FDD_FR1_B	-123.5	-120.5	-117.5	
	NR_TDD_FR1_C	-123	-120	-117	
	NR_FDD_FR1_D, NR_TDD_FR1_D	-122.5	-119.5	-116.5	

	NR_FDD_FR1_E, NR_TDD_FR1_E	-122	-119	-116	
	NR_FDD_FR1_F	-121.5	-118.5	-115.5	
	NR_FDD_FR1_G, NR_TDD_FR1_G	-121	-118	-115	
	NR_FDD_FR1_H	-120.5	-117.5	-114.5	
NOTE 1: NR operating band groups are defined in clause 3.5.2.					

Table B.2.8.3.1-2: Conditions for L1-SINR measurements with CSI-RS based CMR and ZP-IMR in FR2

Parameter	Angle of arrival	NR operating bands	Minimum CSI-RS_RP Note 2, Note 3						CSI-RS Ês/Iot
			dBm / SCS_{CSI-RS}						dB
			SCS_{CSI-RS} = 60 kHz					SCS_{CSI-RS} = 120 kHz	
			UE Power class					UE Power class	
			1	2	3	4	5	1, 2, 3, 4, 5	
Conditions	Rx Beam Peak	n257	-128.3+Y_1	-113.8	-112.1	-127.8+Y_4	-123.4+Y_5	(Value for SCS_{CSI-RS} = 60 kHz) +3dB	≥-3
		n258	-128.3+Y_1	-113.8	-112.1	-127.8+Y_4	-123.6+Y_5		
		n259			-108.5		-120.5+Y_5		
		n260	-125.3+Y_1		-109.5	-125.8+Y_4			
		n261	-128.3+Y_1	-113.8	-112.1	-127.8+Y_4			
	Spherical coverage Note 1	n257	-120.3+Z_1	-102.8	-101.2	-118.8+Z_4	-115.4+Z_5	(Value for SCS_{CSI-RS} = 60 kHz) +3dB	≥-3
		n258	-120.3+Z_1	-102.8	-101.2	-118.8+Z_4	-115.6+Z_5		
		n259			-95.7		-112.5+Z_5		
		n260	-117.3+Z_1		-96.9	-113.8+Z_4			
		n261	-120.3+Z_1	-102.8	-101.2	-118.8+Z_4			

NOTE 1: Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met.
NOTE 2: Values specified at the Reference point to give minimum CSI-RS Ês/Iot, with no applied noise.
NOTE 3: For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by $\Delta MB_{P,n}$ and Spherical coverage values are increased by $\Delta MB_{S,n}$, the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].

B.2.8.3.2 L1-SINR reporting with CSI-RS based CMR and dedicated NZP-IMR configured

This clause defines the following conditions for NR L1-SINR measurement reporting and corresponding procedures performed based on CSI-RSs and NZP-IMRs: CSI-RS_RP, CSI-RS Ês/Iot and NZP-IMR Ês/Iot, applicable for a corresponding operating band.

The conditions are defined in Table B.2.8.3.2-1 for FR1 NR cells.

The conditions are defined in Table B.2.8.3.2-2 for FR2 NR cells.

Table B.2.8.3.2-1: Conditions for L1-SINR measurements with CSI-RS based CMR and NZP-IMR in FR1

Parameter	NR operating band groups Note1	Minimum CSI-RS_RP			CSI-RS Ês/Iot	NZP-IMR Ês/Iot
		dBm / SCS_{SSB}			dB	dB
		SCS_{CSI-RS} = 15 kHz	SCS_{CSI-RS} = 30 kHz	SCS_{CSI-RS} = 60 kHz		
Conditions	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	≥ 0	≥ 0
	NR_FDD_FR1_B	-120.5	-117.5	-114.5		
	NR_TDD_FR1_C	-120	-117	-114		
	NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5		
	NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113		
	NR_FDD_FR1_F	-118.5	-115.5	-112.5		
	NR_FDD_FR1_G, NR_TDD_FR1_G	-118	-115	-112		
	NR_FDD_FR1_H	-117.5	-114.5	-111.5		

NOTE 1: NR operating band groups are defined in clause 3.5.2.

Table B.2.8.3.2-2: Conditions for L1-SINR measurements with CSI-RS based CMR and NZP-IMR in FR2

Parameter	Angle of arrival	NR operating bands	Minimum CSI-RS_RP Note 2, Note 3						CSI-RS Ês/Iot	NZP-IMR Ês/Iot
			dBm / SCS_{CSI-RS}						dB	dB
			SCS_{CSI-RS} = 60 kHz					SCS_{CSI-RS} = 120 kHz		
			UE Power class					UE Power class		
			1	2	3	4	5	1, 2, 3, 4, 5		
Conditions	Rx Beam Peak	n257	-125.3+Y_1	-110.8	-109.1	-124.8+Y_4	-120.4+Y_5	(Value for SCS_{CSI-RS} = 60 kHz) +3dB	≥0	≥0
		n258	-125.3+Y_1	-110.8	-109.1	-124.8+Y_4	-120.6+Y_5			
		n259			-105.5		-117.5+Y_5			
		n260	-122.3+Y_1		-106.5	-122.8+Y_4				
		n261	-125.3+Y_1	-110.8	-109.1	-124.8+Y_4				
	Spherical coverage Note 1	n257	-117.3+Z_1	-99.8	-98.2	-115.8+Z_4	-112.4+Z_5	(Value for SCS_{CSI-RS} = 60 kHz) +3dB	≥0	≥0
		n258	-117.3+Z_1	-99.8	-98.2	-115.8+Z_4	-112.6+Z_5			
		n259			-92.7		-109.5+Z_5			
		n260	-114.3+Z_1		-93.9	-110.8+Z_4				
		n261	-117.3+Z_1	-99.8	-98.2	-115.8+Z_4				

NOTE 1: Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met.
NOTE 2: Values specified at the Reference point to give minimum CSI-RS Ês/Iot, with no applied noise.
NOTE 3: For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by $\Delta MB_{P,n}$ and Spherical coverage values are increased by $\Delta MB_{S,n}$, the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].

Editor's notes for Table B.2.8.3.2-2:

- *The value of Y for power classes 1, 4 and 5 is FFS, where Y_1, Y_4 and Y_5 are the rough/fine beam gain differences in Rx beam peak direction for power classes 1, 4 and 5 respectively*

- *The value of Z for power classes 1, 4 and 5 is FFS, where Z_1, Z_4 and Z_5 are the rough/fine beam gain differences in spherical coverage directions for power classes 1, 4 and 5 respectively*

B.2.9 Conditions for NR intra-frequency measurements under CCA

This clause defines the following conditions for NR intra-frequency measurements unde CCA and corresponding procedures performed based on SSBs: SSB_RP and SSB Ês/Iot, applicable for a corresponding operating band.

The conditions are defined in Table B.2.9-1 for NR cells under CCA.

Table B.2.9-1: Conditions for intra-frequency measurements under CCA

Parameter	NR operating band groups Note1	Minimum SSB_RP		SSB Ês/Iot
		dBm / SCS_{SSB}		
		SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz	dB
Conditions	NR_CCA_FR1_I	-123	-120	≥ -6
	NR_CCA_FR1_J	-122.5	-119.5	
NOTE 1: NR operating band groups are as defined in clause 3.5.2.				

B.2.10 Conditions for NR inter-frequency measurements under CCA

This clause defines the following conditions for NR inter-frequency measurements and corresponding procedures performed based on SSBs: SSB_RP and SSB Ês/Iot, applicable for a corresponding operating band.

The conditions are defined in Table B.2.10-1 for NR cells under CCA.

Table B.2.10-1: Conditions for inter-frequency measurements under CCA

Parameter	NR operating band groups Note1	Minimum SSB_RP		SSB Ês/Iot
		dBm / SCS_{SSB}		
		SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz	dB
Conditions	NR_CCA_FR1_I	-121	-118	≥ -4
	NR_CCA_FR1_J	-120.5	-117.5	
NOTE 1: NR operating band groups are as defined in clause 3.5.2.				

B.2.11 Conditions for NR L1-RSRP reporting under CCA

B.2.11.1 Conditions for SSB based L1-RSRP reporting

This clause defines the following conditions for NR L1-RSRP measurement reporting and corresponding procedures performed based on SSBs under CCA: SSB_RP and SSB Ês/Iot, applicable for a corresponding operating band.

The conditions are defined in Table B.2.11.1-1 for NR cells under CCA.

Table B.2.11.1-1: Conditions for SSB based L1-RSRP measurements under CCA

Parameter	NR operating band groups Note1	Minimum SSB_RP		SSB Ês/Iot
		dBm / SCS_{SSB}		
		SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz	dB
Conditions	NR_CCA_FR1_I	-120	-117	≥ -3
	NR_CCA_FR1_J	-119.5	-116.5	
NOTE 1: NR operating band groups are defined in clause 3.5.2.				

B.2.12 Conditions for NR CSI-RS based intra-frequency measurements

This clause defines the following conditions for NR CSI-RS based intra-frequency measurements and corresponding procedures performed based on CSI-RS: CSI_RP and CSI-RS Ês/Iot, applicable for a corresponding operating band.

The conditions are defined in Table B.2.12-1 for FR1 NR cells.

The conditions are defined in Table B.2.12-2 for FR2 NR cells.

Table B.2.12-1: Conditions for CSI-RS based intra-frequency measurements in FR1

Parameter	NR operating band groups Note1	Minimum CSI_RP			CSI-RS Ês/Iot
		dBm / SCS_{CSI-RS}			
		SCS_{CSI-RS} = 15 kHz	SCS_{CSI-RS} = 30 kHz	SCS_{CSI-RS} = 60 kHz	dB
Conditions	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-127	-124	-121	≥ -6
	NR_FDD_FR1_B	-126.5	-123.5	-120.5	
	NR_TDD_FR1_C	-126	-123	-120	
	NR_FDD_FR1_D, NR_TDD_FR1_D	-125.5	-122.5	-119.5	

	NR_FDD_FR1_E, NR_TDD_FR1_E	-125	-122	-119	
	NR_FDD_FR1_F	-124.5	-121.5	-118.5	
	NR_FDD_FR1_G, NR_TDD_FR1_G	-124	-121	-118	
	NR_FDD_FR1_H	-123.5	-120.5	-117.5	
NOTE 1: NR operating band groups are defined in clause 3.5.2.					

Table B.2.12-2: Conditions for CSI-RS based intra-frequency measurements in FR2

Parameter	Angle of arrival	NR operating bands	Minimum CSI_RP Note 2, Note 3					CSI-RS Ês/Iot
			dBm / SCS_{CSI-RS}					dB
			SCS_{CSI-RS} = 120 kHz				SCS_{CSI-RS} = 60 kHz	
			UE power class				UE power class	
			1	2	3	4	1, 2, 3, 4	
Conditions	Rx Beam Peak	n257	$-128.3+Y_1$	-113.8	-112.1	$-127.8+Y_4$	(Value for SCS_{CSI-RS} = 120 kHz) - 3dB	≥-6
		n258	$-128.3+Y_1$	-113.8	-112.1	$-127.8+Y_4$		
		n259			-108.5	$-124.7+Y_4$		
		n260	$-125.3+Y_1$		-109.5	$-125.8+Y_4$		
		n261	$-128.3+Y_1$	-113.8	-112.1	$-127.8+Y_4$		
	Spherical coverage Note 1	n257	$-120.3+Z_1$	-102.8	-101.2	$-118.8+Z_4$	(Value for SCS_{CSI-RS} = 120 kHz) - 3dB	≥-6
		n258	$-120.3+Z_1$	-102.8	-101.2	$-118.8+Z_4$		
		n259			-95.7	$-115.7+Z_4$		
		n260	$-117.3+Z_1$		-96.9	$-113.8+Z_4$		
		n261	$-120.3+Z_1$	-102.8	-101.2	$-118.8+Z_4$		

Note 1: Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met.
Note 2: Values specified at the Reference point to give minimum CSI-RS Ês/Iot, with no applied noise.
Note 3: For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by $\Delta MB_{P,n}$ and spherical coverage values are increased by $\Delta MB_{S,n}$, the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].

Editor's notes for Table B.2.12-2:

- *The value of Y for power classes 1 and 4 is FFS, where Y_1 and Y_4 are the rough/fine beam gain differences in Rx beam peak direction for power classes 1 and 4 respectively*

- *The value of Z for power classes 1 and 4 is FFS, where Z_1 and Z_4 are the rough/fine beam gain differences in spherical coverage directions for power classes 1 and 4 respectively*

B.2.13 Conditions for NR CSI-RS based inter-frequency measurements

This clause defines the following conditions for NR CSI-RS based inter-frequency measurements and corresponding procedures performed based on CSI-RS: CSI_RP and CSI-RS Ês/Iot, applicable for a corresponding operating band.

The conditions are defined in Table B.2.13-1 for FR1 NR cells.

The conditions are defined in Table B.2.13-2 for FR2 NR cells.

Table B.2.13-1: Conditions for CSI-RS based inter-frequency measurements in FR1

Parameter	NR operating band groups Note1	Minimum CSI_RP dBm / SCS_{CSI-RS}			CSI-RS Ês/Iot dB
		SCS_{CSI-RS} = 15 kHz	SCS_{CSI-RS} = 30 kHz	SCS_{CSI-RS} = 60 kHz	
Conditions	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-125	-122	-119	≥ -6
	NR_FDD_FR1_B	-124.5	-121.5	-118.5	
	NR_TDD_FR1_C	-124	-121	-118	
	NR_FDD_FR1_D, NR_TDD_FR1_D	-124.5	-120.5	-117.5	
	NR_FDD_FR1_E, NR_TDD_FR1_E	-123	-120	-117	
	NR_FDD_FR1_F	-122.5	-119.5	-116.5	
	NR_FDD_FR1_G, NR_TDD_FR1_G	-122	-119	-116	
	NR_FDD_FR1_H	-121.5	-118.5	-115.5	
NOTE 1: NR operating band groups are defined in clause 3.5.2.					

Table B.2.13-2: Conditions for CSI-RS based inter-frequency measurements in FR2

Parameter	Angle of arrival	NR operating bands	Minimum CSI_RP Note 2, Note 3 dBm / SCS_{CSI-RS}					CSI-RS Ês/Iot dB
			SCS_{CSI-RS} = 120 kHz				SCS_{CSI-RS} = 60 kHz	
			UE power class				UE power class	
			1	2	3	4	1, 2, 3, 4	
Conditions	Rx Beam Peak	n257	$-126.3+Y_1$	-111.8	-110.1	$-125.8+Y_4$	(Value for SCS_{CSI-RS} = 120 kHz) - 3dB	≥-4
		n258	$-126.3+Y_1$	-111.8	-110.1	$-125.8+Y_4$		
		n259			-106.5	$-122.7+Y_4$		
		n260	$-123.3+Y_1$		-107.5	$-123.8+Y_4$		
		n261	$-126.3+Y_1$	-111.8	-110.1	$-125.8+Y_4$		
	Spherical coverage Note 1	n257	$-118.3+Z_1$	-100.8	-99.2	$-116.8+Z_4$	(Value for SCS_{CSI-RS} = 120 kHz) - 3dB	≥-4
		n258	$-118.3+Z_1$	-100.8	-99.2	$-116.8+Z_4$		
		n259			-93.7	$-113.7+Z_4$		
		n260	$-115.3+Z_1$		-94.9	$-111.8+Z_4$		
		n261	$-118.3+Z_1$	-100.8	-99.2	$-116.8+Z_4$		
NOTE 1: Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met. NOTE 2: Values specified at the Reference point to give minimum CSI-RS Ês/Iot, with no applied noise. NOTE 3: For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by $\Delta MB_{P,n}$ and Spherical coverage values are increased by $\Delta MB_{S,n}$, the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].									

Editor's notes for Table B.2.13-2:

- The value of Y for power classes 1 and 4 is FFS, where Y_1 and Y_4 are the rough/fine beam gain differences in Rx beam peak direction for power classes 1 and 4 respectively

- The value of Z for power classes 1 and 4 is FFS, where Z_1, and Z_4 are the rough/fine beam gain differences in spherical coverage directions for power classes 1 and 4 respectively.

B.2.14 Conditions for NR PRS-based measurements

This clause defines the following conditions for NR PRS-based measurements and corresponding procedures performed based on PRS: PRP and PRS Ês/Iot, applicable for a corresponding operating band.

The conditions are defined in Table B.2.14-1 for FR1 NR cells.

The conditions are defined in Table B.2.14-2 for FR2 NR cells.

Table B.2.14-1: Conditions for NR PRS-based measurements in FR1

Parameter	NR operating band groups Note1	Minimum PRP1,2 dBm / SCS_{PRS}			PRS Ês/Iot dB	
		SCS_{PRS} = 15 kHz	SCS_{PRS} = 30 kHz	SCS_{PRS} = 60 kHz		
Conditions	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-127	-124	-121	≥ -6 Note2 ≥ -13 Note3 ≥ -3 Note4	≥ -6 Note5 ≥ -3 Note6
	NR_FDD_FR1_B	-126.5	-123.5	-120.5		
	NR_TDD_FR1_C	-126	-123	-120		
	NR_FDD_FR1_D, NR_TDD_FR1_D	-125.5	-122.5	-119.5		
	NR_FDD_FR1_E, NR_TDD_FR1_E	-125	-122	-119		
	NR_FDD_FR1_F	-124.5	-121.5	-118.5		
	NR_FDD_FR1_G, NR_TDD_FR1_G	-124	-121	-118		
	NR_FDD_FR1_H	-123.5	-120.5	-117.5		

NOTE 1: NR operating band groups are defined in clause 3.5.2.
NOTE 2: PRS Ês/Iot for RSTD measurement reference cell PRS resource.
NOTE 3: PRS Ês/Iot for RSTD measurement neighbor cell PRS resource, PRS-RSRP measurement, PRS-RSRPP measurement and UE Rx-Tx time difference measurement.
NOTE 4: PRS Ês/Iot for PRS-RSRP measurement, PRS-RSRPP measurement and UE Rx-Tx time difference measurement.
NOTE 5: PRS Ês/Iot for RSTD measurement neighbor cell PRS resource, PRS-RSRP measurement, PRS-RSRPP measurement and UE Rx-Tx time difference measurement when performed with reduced number of samples.
NOTE 6: PRS Ês/Iot for RSTD measurement reference cell PRS resource when performed with reduced number of samples.

Table B.2.14-2: Conditions for NR PRS-based measurements in FR2

Parameter	Angle of arrival	NR operating bands	Minimum PRP1,2 Note 2, Note 3 dBm / SCS_{PRS}					PRS Ês/Iot dB	
			SCS_{PRS} = 120 kHz					SCS_{PRS} = 60 kHz		
			UE power class					UE power class		
			1	2	3	4	5	1, 2, 3, 4		
Conditions	Rx Beam Peak	n257	-128.3+Y_1	-113.8	-112.1	-127.8+Y_4	-117.4+Y5	(Value for SCS_{PRS} = 120 kHz) - 3dB	≥ -6 Note4 ≥ -13 Note5 ≥ -3 Note6	≥ -6 Note7 ≥ -3 Note8
		n258	-128.3+Y_1	-113.8	-112.1	-127.8+Y_4	-117.6+Y5			
		n259			-108.5	-124.7+Y_4	-114.5+Y5			
		n260	-125.3+Y_1		-109.5	-125.8+Y_4				
		n261	-128.3+Y_1	-113.8	-112.1	-127.8+Y_4				
		n262	-123.3+Y_1	-108.6	-106.6	-121.8+Y_4				
		n257	-120.3+Z_1	-102.8	-101.2	-118.8+Z_4	-109.4+Z5	(Value for		

	Spherical coverage Note 1	n258	-120.3+Z_1	-102.8	-101.2	-118.8+Z_4		SCS_{PRS} = 120 kHz) - 3dB	≥ -6 Note4 ≥ -13 Note5 ≥ -3 Note6	≥ -6 Note7 ≥ -3 Note8
		n259			-95.7	-115.7+Z_4	-101.6+Z5			
		n260	-117.3+Z_1		-96.9	-113.8+Z_4				
		n261	-120.3+Z_1	-102.8	-101.2	-118.8+Z_4				
		n262	-115.1+Z_1	-94.7	-93.5	-109.7+Z_4				

NOTE 1: Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met.
NOTE 2: Values specified at the Reference point to give minimum PRS Ês/Iot, with no applied noise.
NOTE 3: For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by $\Delta MB_{P,n}$ and spherical coverage values are increased by $\Delta MB_{S,n}$, the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].
NOTE 4: PRS Ês/Iot for RSTD measurement reference cell PRS resource.
NOTE 5: PRS Ês/Iot for RSTD measurement neighbor cell PRS resource, PRS-RSRP measurement, PRS-RSRPP measurement and UE Rx-Tx time difference measurement.
NOTE 6: PRS Ês/Iot for PRS-RSRP measurement, PRS-RSRPP measurement and UE Rx-Tx time difference measurement.
NOTE 7: PRS Ês/Iot for RSTD measurement neighbor cell PRS resource, PRS-RSRP measurement, PRS-RSRPP measurement and UE Rx-Tx time difference measurement when performed with reduced number of samples.
NOTE 8: PRS Ês/Iot for RSTD measurement reference cell PRS resource when performed with reduced number of samples.

Editor's notes for Table B.2.14-2:

- The value of Y for power classes 1 and 4 is FFS, where Y_1 and Y_4 are the rough/fine beam gain differences in Rx beam peak direction for power classes 1 and 4 respectively

- The value of Z for power classes 1 and 4 is FFS, where Z_1 and Z_4 are the rough/fine beam gain differences in spherical coverage directions for power classes 1 and 4 respectively

B.2.15 Conditions for NR intra-frequency measurements

This clause defines the following conditions for RedCap NR intra-frequency measurements and corresponding procedures performed based on SSBs: SSB_RP and SSB Ês/Iot, applicable for a corresponding operating band.

The conditions are defined in Table B.2.15-1 and Table B.2.15-2 for 1 Rx and 2 Rx RedCap respectively for FR1 NR cells.

The conditions are defined in Table B.2.15-3 for FR2 NR cells.

Table B.2.15-1: Conditions for intra-frequency cell re-selection in FR1 for RedCap for 1 Rx

Parameter	NR operating band groups Note1	Minimum SSB_RP dBm / SCS_{SSB}		SSB Ês/Iot dB
		SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz	
Conditions	NR_FDD_RC_FR1_A, NR_TDD_RC_FR1_A	TBD	TBD	≥ -6
	NR_FDD_RC_FR1_B	TBD	TBD	
	NR_TDD_RC_FR1_C	TBD	TBD	
	NR_FDD_RC_FR1_D, NR_TDD_RC_FR1_D	TBD	TBD	
	NR_FDD_RC_FR1_E, NR_TDD_RC_FR1_E	TBD	TBD	
	NR_FDD_RC_FR1_F	TBD	TBD	
	NR_FDD_RC_FR1_G	TBD	TBD	
	NR_FDD_RC_FR1_H	TBD	TBD	

NOTE 1: NR operating band groups are defined in clause 3.5.2.

Table B.2.15-2: Conditions for intra-frequency cell re-selection in FR1 for RedCap for 2Rx

Parameter	NR operating band groups Note1	Minimum SSB_RP		SSB Ês/Iot
		dBm / SCS_{SSB}		dB
		SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz	
Conditions	NR_FDD_RC_FR1_A, NR_TDD_RC_FR1_A	-127	-124	≥ -6
	NR_FDD_RC_FR1_B	-126.5	-123.5	
	NR_TDD_RC_FR1_C	-126	-123	
	NR_FDD_RC_FR1_D, NR_TDD_RC_FR1_D	-125.5	-122.5	
	NR_FDD_RC_FR1_E, NR_TDD_RC_FR1_E	-125	-122	
	NR_FDD_RC_FR1_F	-124.5	-121.5	
	NR_FDD_RC_FR1_G	-124	-121	
	NR_FDD_RC_FR1_H	-123.5	-120.5	

NOTE 1: NR operating band groups are defined in clause 3.5.2.

Table B.2.15-3: Conditions for intra-frequency measurements in FR2 for RedCap

Parameter	Angle of arrival	NR operating bands	Minimum SSB_RP Note 2, Note 3						SSB Ês/Iot
			dBm / SCS_{SSB}						dB
			SCS_{SSB} = 120 kHz					SCS_{SSB} = 240 kHz	
			UE Power class					UE Power class	
			1	2	3	4	5	7	1, 2, 3, 4, 5
Conditions	Rx Beam Peak	n257	-128.3+Y_1	-113.8	-112.1	-127.8+Y_4	-123.4+Y_5	TBD	(Value for SCS_{SSB} = 120 kHz) +3dB
		n258	-128.3+Y_1	-113.8	-112.1	-127.8+Y_4	-123.6+Y_5	TBD	
		n261	-128.3+Y_1	-113.8	-112.1	-127.8+Y_4		TBD	
	Spherical coverage Note 1	n257	-120.3+Z_1	-102.8	-101.2	-118.8+Z_4	-115.4+Z_5	TBD	(Value for SCS_{SSB} = 120 kHz) +3dB
		n258	-120.3+Z_1	-102.8	-101.2	-118.8+Z_4	-115.6+Z_5	TBD	
		n261	-120.3+Z_1	-102.8	-101.2	-118.8+Z_4		TBD	

Note 1: Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met.
Note 2: Values specified at the Reference point to give minimum SSB Ês/Iot, with no applied noise.
Note 3: For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by $\Delta MB_{P,n}$ and Spherical coverage values are increased by $\Delta MB_{S,n}$, the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].

Editor's notes for Table B.2.2-2:

- *The value of Y for power classes 1, 4 and 5 is FFS, where Y_1, Y_4 and Y_5 are the rough/fine beam gain differences in Rx beam peak direction for power classes 1, 4 and 5 respectively*

- *The value of Z for power classes 1, 4 and 5 is FFS, where Z_1, Z_4 and Z_5 are the rough/fine beam gain differences in spherical coverage directions for power classes 1, 4 and 5 respectively*

B.2.16 Conditions for NR inter-frequency measurements

This clause defines the following conditions for RedCap NR inter-frequency measurements and corresponding procedures performed based on SSBs: SSB_RP and SSB Ês/Iot, applicable for a corresponding operating band.

The conditions are defined in Table B.2.16-1 and Table B.2.16-2 for 1 Rx and 2 Rx RedCap for FR1 NR cells.

The conditions are defined in Table B.2.16-3 for FR2 NR cells.

Table B.2.16-1: Conditions for inter-frequency measurements in FR1 for 1 Rx RedCap

Parameter	NR operating band groups Note1	Minimum SSB_RP		SSB Ês/Iot
		dBm / SCS_{SSB}		dB
		SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz	
Conditions	NR_FDD_RC_FR1_A, NR_TDD_RC_FR1_A	TBD	TBD	≥ -4
	NR_FDD_RC_FR1_B	TBD	TBD	
	NR_TDD_RC_FR1_C	TBD	TBD	
	NR_FDD_RC_FR1_D, NR_TDD_RC_FR1_D	TBD	TBD	
	NR_FDD_RC_FR1_E, NR_TDD_RC_FR1_E	TBD	TBD	
	NR_FDD_RC_FR1_F	TBD	TBD	
	NR_FDD_RC_FR1_G	TBD	TBD	
	NR_FDD_RC_FR1_H	TBD	TBD	
NOTE 1: NR operating band groups are defined in clause 3.5.2.				

Table B.2.16-2: Conditions for inter-frequency measurements in FR1 for 2 Rx RedCap

Parameter	NR operating band groups Note1	Minimum SSB_RP		SSB Ês/Iot
		dBm / SCS_{SSB}		dB
		SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz	
Conditions	NR_FDD_RC_FR1_A, NR_TDD_RC_FR1_A	-125	-122	≥ -4
	NR_FDD_RC_FR1_B	-124.5	-121.5	
	NR_TDD_RC_FR1_C	-124	-121	
	NR_FDD_RC_FR1_D, NR_TDD_RC_FR1_D	-124.5	-120.5	
	NR_FDD_RC_FR1_E, NR_TDD_RC_FR1_E	-123	-120	
	NR_FDD_RC_FR1_F	-122.5	-119.5	
	NR_FDD_RC_FR1_G	-122	-119	
	NR_FDD_RC_FR1_H	-121.5	-118.5	
NOTE 1: NR operating band groups are defined in clause 3.5.2.				

Table B.2.16-3: Conditions for inter-frequency measurements in FR2 for RedCap

Parameter	Angle of arrival	NR operating bands	Minimum SSB_RP Note 2, Note 3		SSB Ês/Iot
			dBm / SCS_{SSB}		dB
			SCS_{SSB} = 120 kHz	SCS_{SSB} = 240 kHz	
			UE Power class	UE Power class	

			1	2	3	4	5	7	1, 2, 3, 4, 5	
Conditions	Rx Beam Peak	n257	-126.3+Y_1	-111.8	-110.1	-125.8+Y_4	-121.4+Y_5	TBD	(Value for SCS_{SSB} = 120 kHz) +3dB	≥-4
		n258	-126.3+Y_1	-111.8	-110.1	-125.8+Y_4	-121.6+Y_5	TBD		
		n261	-126.3+Y_1	-111.8	-110.1	-125.8+Y_4		TBD		
	Spherical coverage Note 1	n257	-118.3+Z_1	-100.8	-99.2	-116.8+Z_4	-113.4+Z_5	TBD	(Value for SCS_{SSB} = 120 kHz) +3dB	≥-4
		n258	-118.3+Z_1	-100.8	-99.2	-116.8+Z_4	-113.6+Z_5	TBD		
		n261	-118.3+Z_1	-100.8	-99.2	-116.8+Z_4		TBD		

NOTE 1: Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met.
NOTE 2: Values specified at the Reference point to give minimum SSB Ês/Iot, with no applied noise.
NOTE 3: For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by $\Delta MB_{P,n}$ and Spherical coverage values are increased by $\Delta MB_{S,n}$, the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].

Editor's notes for Table B.2.3-2:

- *The value of Y for power classes 1, 4 and 5 is FFS, where Y_1, Y_4 and Y_5 are the rough/fine beam gain differences in Rx beam peak direction for power classes 1, 4 and 5 respectively*

- *The value of Z for power classes 1, 4 and 5 is FFS, where Z_1, Z_4 and Z_5 are the rough/fine beam gain differences in spherical coverage directions for power classes 1, 4 and 5 respectively*

B.2.17 Conditions for NR intra-frequency measurements for satellite access

This clause defines the following conditions for NR intra-frequency measurements and corresponding procedures performed based on SSBs: SSB_RP and SSB Ês/Iot, applicable for a corresponding operating band for satellite access.

The conditions are defined in Table B.2.17-1 for FR1 NR cells.

Table B.2.17-1: Conditions for intra-frequency measurements in FR1 for satellite access

Parameter	NR operating band groups Note1	Minimum SSB_RP dBm / SCS_{SSB}		SSB Ês/Iot dB
		SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz	
Conditions	NR_FDD_SAB_FR1_A	-127	-124	≥ -6

NOTE 1: NR operating band groups for satellite access are defined in clause 3.5.2A.

B.2.18 Conditions for NR inter-frequency measurements for satellite access

This clause defines the following conditions for NR inter-frequency measurements and corresponding procedures performed based on SSBs: SSB_RP and SSB Ês/Iot, applicable for a corresponding operating band for satellite access.

The conditions are defined in Table B.2.18-1 for FR1 NR cells.

Table B.2.18-1: Conditions for inter-frequency measurements in FR1 for satellite access

Parameter	NR operating band groups Note1	Minimum SSB_RP		SSB Ês/Iot
		dBm / SCS_{SSB}		dB
		SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz	
Conditions	NR_FDD_SAB_FR1_A	-125	-122	≥ -4
NOTE 1: NR operating band groups for satellite access are defined in clause 3.5.2A.				

B.2.19 Conditions for NR L1-RSRP reporting for satellite access

B.2.19.1 Conditions for SSB based L1-RSRP reporting for satellite access

This clause defines the following conditions for NR L1-RSRP measurement reporting and corresponding procedures performed based on SSBs: SSB_RP and SSB Ês/Iot, applicable for a corresponding operating band for satellite access.

The conditions are defined in Table B.2.19.1-1 for FR1 NR cells.

Table B.2.19.1-1: Conditions for SSB based L1-RSRP measurements in FR1 for satellite access

Parameter	NR operating band groups Note1	Minimum SSB_RP		SSB Ês/Iot
		dBm / SCS_{SSB}		dB
		SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz	
Conditions	NR_FDD_SAB_FR1_A	-124	-121	≥ -3
NOTE 1: NR operating band groups for satellite access are defined in clause 3.5.2A.				

B.2.19.2 Conditions for CSI-RS based L1-RSRP reporting for satellite access

This clause defines the following conditions for NR L1-RSRP measurement reporting and corresponding procedures performed based on CSI-RS: CSI-RS_RP and CSI-RS Ês/Iot, applicable for a corresponding operating band for satellite access.

The conditions are defined in Table B.2.19.2-1 for FR1 NR cells.

Table B.2.19.2-1: Conditions for CSI-RS based L1-RSRP measurements in FR1 for satellite access

Parameter	NR operating band groups Note1	Minimum CSI-RS_RP			CSI-RS Ês/Iot
		dBm / SCS_{CSI-RS}			dB
		SCS_{CSI-RS} = 15 kHz	SCS_{CSI-RS} = 30 kHz	SCS_{CSI-RS} = 60 kHz	
Conditions	NR_FDD_SAB_FR1_A	-124	-121	-118	≥ -3
NOTE 1: NR operating band groups for satellite access are defined in clause 3.5.2A.					

B.2.20 Conditions for RRC connection release with redirection to NR for satellite access

This clause defines the following conditions for RRC connection release with redirection to NR: SSB_RP and SSB Ês/Iot, applicable for a corresponding operating band for satellite access.

The conditions are defined in Table B.2.20-1 for FR1 NR cells.

Table B.2.20-1: Conditions for for RRC connection release with redirection to NR in FR1 for satellite access

Parameter	NR operating band groups Note1	Minimum SSB_RP		SSB Ês/Iot
		dBm / SCS_{SSB}		dB
		SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz	
Conditions	NR_FDD_SAB_FR1_A	-125	-122	≥ -4
NOTE 1: NR operating band groups for satellite access are defined in clause 3.5.2A.				

B.3 RRM Requirements Exceptions

B.3.1 Introduction

Annex B.3 covers exceptions for side conditions based on receiver sensitivity for CA, DC, and SUL.

B.3.2 Receiver sensitivity relaxation for CA

B.3.2.1 Receiver sensitivity relaxation for UE supporting CA in FR1

For a UE supporting inter-band carrier aggregation configuration with uplink in NR band, if there is a relaxation of receiver sensitivity $\Delta R_{IB,c}$>0 dB as defined in clause 7.3A.3 of TS 38.101-1 [18], the relevant side conditions specifying received power levels (SSB_RP and Io) shall be increased by the amount $\Delta=\Delta R_{IB,c}$ defined for the corresponding downlink NR bands.

For a UE supporting CA configuration in FR1, the requirement in this clause applies for both SC and CA operation.

B.3.2.2 Receiver sensitivity relaxation for UE configured with CA in FR1

B.3.2.2.1 Inter-band carrier aggregation

For a UE configured with inter-band carrier aggregation with active uplink in NR band, if there is a relaxation of receiver sensitivity $\Delta R_{IB,c}$>0 dB as defined in clause 7.3A.3 of TS 38.101-1 [18], the relevant side conditions specifying received power levels (SSB_RP and Io) shall be increased by the amount $\Delta=\Delta R_{IB,c}$ defined for the corresponding downlink NR bands.

If the relaxation Δ specified in this clause applies, then the relaxation specified in clause B.3.2.1 should not be applied.

B.3.2.2.2 Reference sensitivity exceptions due to UL harmonic interference for CA

In this clause, requirements exceptions are described for the UE configured with a band in FR1 when it is impacted by UL harmonic interference from another band in FR1 of the same CA configuration.

A relevant side condition (SSB_RP and Io) in a requirement shall be increased by the amount Δ=L2-L1, where L1 is the reference sensitivity level specified in clause 7.3.2 of TS 38.101-1 [18], and L2 is the reference sensitivity level based on the requirements in clause 7.3A.4 of TS 38.101-1 [18], when the following conditions are fulfilled,

- corresponding downlink component carriers on different NR bands are configured with CA and active,
- the upling is configured in the NR low operating band and is active,
- the uplink configuration is as specified in clause 7.3A.4 of TS 38.101-1 [18], and
- the exception requirements specified in clause 7.3A.4 of TS 38.101-1 [18] apply.

If the relaxation Δ specified in this clause applies, then the relaxation specified in clause B.3.2.1 should not be applied.

B.3.2.2.3 Reference sensitivity exceptions due to intermodulation interference due to 2UL CA

In this clause, requirements exceptions are described for the UE with an inter-band carrier aggregation with uplink assigned to two NR bands.

A relevant side condition (SSB_RP and Io) in a requirement shall be increased by the amount Δ=L2-L1, where L1 is the reference sensitivity level specified in clause 7.3.2 of TS 38.101-1 [18], and L2 is the reference sensitivity level based on the requirements in clause 7.3A.5 of TS 38.101-1 [18], when the following conditions are fulfilled,

- corresponding downlink component carriers on different bands are configured with CA and active,
- uplinks are assigned to two NR bands,
- the exception requirements specified in clause 7.3A.5 of TS 38.101-1 [18] apply.

If the relaxation Δ specified in this clause applies, then the relaxation specified in clause B.3.2.1 should not be applied.

B.3.2.3 Receiver sensitivity relaxation for UE supporting CA in FR2

B.3.2.4 Receiver sensitivity relaxation for UE configured with CA in FR2

B.3.2.4.1 Intra-band contiguous carrier aggregation

For a UE configured with intra-band contiguous carrier aggregation in NR band in FR2, if there is a relaxation of receiver sensitivity ΔR_{IB}>0 dB as defined in clause 7.3A.2.1 of TS 38.101-2 [19] depending on the aggregated channel bandwidth, the relevant side conditions specifying received power levels (SSB_RP and Io) shall be increased by the amount $\Delta=\Delta R_{IB}$ defined for the corresponding downlink NR bands.

B.3.2.4.2 Intra-band non-contiguous carrier aggregation

For a UE configured with intra-band non-contiguous carrier aggregation in NR band in FR2, if there is a relaxation of receiver sensitivity ΔR_{IB}>0 dB as defined in clause 7.3A.2.1 of TS 38.101-2 [19] depending on the aggregated channel bandwidth, the relevant side conditions specifying received power levels (SSB_RP and Io) shall be increased by the amount $\Delta=\Delta R_{IB}$ defined for the corresponding downlink NR bands.

B.3.3 Receiver sensitivity relaxation for DC

B.3.3.1 Receiver sensitivity relaxation for EN-DC

Editor's note: TBD

B.3.3.2 Receiver sensitivity relaxation for NE-DC

Editor's note: TBD

B.3.4 Receiver sensitivity relaxation for SUL

B.3.4.1 Receiver sensitivity relaxation for UE supporting SUL in FR1

For a UE supporting a SUL configuration in FR1, if there is a relaxation of receiver sensitivity $\Delta R_{IB,c}$>0 dB as defined in clause 7.3C.3 of TS 38.101-1 [18], the relevant side conditions specifying received power levels (SSB_RP and Io) shall be increased by the amount $\Delta=\Delta R_{IB,c}$ defined for the corresponding downlink NR bands.

For a UE supporting a SUL configuration in FR1, the requirement in this clause applies for both SC and SUL operation.

B.3.4.2 Receiver sensitivity relaxation for UE configured with SUL in FR1

B.3.4.2.1 Reference sensitivity exceptions due to UL harmonic interference for SUL

In this clause, requirements exceptions are described for the UE with a band in FR1 when it is impacted by UL harmonic interference from another band in FR1 of the same SUL configuration.

A relevant side condition (SSB_RP and Io) in a requirement shall be increased by the amount Δ=L2-L1, where L1 is the reference sensitivity level specified in clause 7.3.2 of TS 38.101-1 [18], and L2 is the reference sensitivity level based on the requirements in clause 7.3C.2 of TS 38.101-1 [18], when the following conditions are fulfilled,

- a downlink component carrier is configured in NR band and is active,
- the upling is configured in the NR low operating band and is active,
- the uplink configuration is as specified in clause 7.3C.2 of TS 38.101-1 [18], and
- the exception requirements specified in clause 7.3C.2 of TS 38.101-1 [18] apply.

If the relaxation Δ specified in this clause applies, then the relaxation specified in clause B.3.4.1 should not be applied.

B.4 Conditions for V2X

B.4.1 Test parameters for GNSS signals

This clause defines the reference signal power levels of generated salellites for a corresponding GNSS, which will be used in V2X test cases.

Table B.4.1-1: GNSS Referenece Signal Power Parameters

System	Parameters	Unit	Value
	Number of generated satellites per system	-	6
GPS(1)	Reference signal power level for all satellites	dBm	-128.5
Galileo	Reference signal power level for all satellites	dBm	-127
GLONASS	Reference signal power level for all satellites	dBm	-131
BDS	Reference signal power level for all satellites	dBm	-133
NOTE 1: "GPS" here means GPS L1 C/A, Modernized GPS, or both, dependent on UE capabilities. NOTE 2: The DUT UE does not need to support all systems. The DUT UE shall support at least one system and will be test for the supported systems.			

B.4.2 Conditions for PSBCH-RSRP Accuracy Requirements

This clause defines the following conditions for PSBCH-RSRP measurement accuracy requirements applicable for a corresponding operating band.

The conditions are defined in Table B.4.2-1 for FR1.

Table B.4.2-1: Conditions for PSBCH-RSRP measurements in FR1

Parameter	NR V2X operating band groups Note1	Minimum S-SSB_RP			S-SSB Ês/Iot
		dBm/SCS_{S-SSB}			dB
		SCS_{S-SSB} = 15kHz	SCS_{S-SSB} = 30kHz	SCS_{S-SSB} = 60kHz	
	NR_TDD_FR1_B	-126.5	-123.5	-120.5	≥ -6
	NR_TDD_FR1_J	-122.5	-119.5	-116.5	
NOTE 1: NR V2X operating band groups are as defined in Section 3.5 for the corresponding NR operating bands.					

B.4.3 Conditions for Selection/Reselection to Intra-frequency SyncRef UE

This clause defines the S-SSB_RP and S-SSB Ês/Iot applicable for a corresponding operating band.

The conditions for selection/reselection to intra-frequency SyncRef UE are defined in Table B.4.3-1 for FR1.

Table B.4.3-1: V2X synchronization measurements in FR1

Parameter	NR V2X operating band groups Note1	Minimum S-SSB_RP			S-SSB Ês/Iot
		dBm/SCS_{S-SSB}			dB
		SCS_{S-SSB} = 15kHz	SCS_{S-SSB} = 30kHz	SCS_{S-SSB} = 60kHz	
	NR_TDD_FR1_B	-120.5	-117.5	-114.5	≥ 0
	NR_TDD_FR1_J	-116.5	-113.5	-110.5	≥ 0
NOTE 1: NR V2X operating band groups are as defined in Section 3.5 for the corresponding NR operating bands. NOTE 2: The SyncRef UE transmission frequency shall be accurate to within ±5 PPM compared to the absolute frequency.					

B.4.4 Conditions for L1 SL-RSRP Accuracy Requirements

This clause defines the following condtions for L1 SL-RSRP measurement accuracy requirements applicable for a corresponding operating band.

The conditions are defined in Table B.4.4-1 for FR1.

Table B.4.4-1: Conditions for L1 SL-RSRP measurements in FR1

Parameter	NR V2X operating band groups Note1	Minimum L1 SL-RSRP			Ês/Iot
		dBm/SCS			dB
		SCS= 15kHz	SCS= 30kHz	SCS = 60kHz	
	NR_TDD_FR1_B	-120.5	-117.5	-114.5	≥ 0
	NR_TDD_FR1_J	-116.5	-113.5	-110.5	
NOTE 1: NR V2X operating band groups are as defined in Section 3.5 for the corresponding NR operating bands. NOTE 2: The parameter Ês/Iot is the Ês/Iot of PSCCH-DMRS and/or PSSCH-DMRS. NOTE 3: The SCS is for PSCCH and/or PSSCH.					

B.5 High level test procedure for SAN RRM tests

The following high level steps are conducted for test cases for SAN defined in clause A.14.

- A set of ephemeris information are pre-defined for each satellite corresponding to different epoch times in [TS TBD].
  - For GEO an altitude of 35,786km is considered. an elevation angle relative to a UE position shall not be smaller than 30 deg during entire test time
  - For LEO an altitude of 600km on a circular orbit is considered.
- A motion trajectory is generated for each satellite based on the ephemeris using Eckstein-Hechler model.
- UE location is determined for the test. The ephemeris and the the UE location should be designed such that elevation angle relative to the UE position shall not be smaller than 30 deg during entire test time.
- Test equipment adjusts the time and frequency of transmission based on the satellite motion trajectory and UE location during test time to emulate the position and velocity change of the satellite relative to the UE.

Annex C (informative): Change history

Change history							
Date	**Meeting**	**TDoc**	**CR**	**Rev**	**Cat**	**Subject/Comment**	**New version**
2017-05	RAN4#83	R4-1706324				Specification skeleton	0.0.1
2017-09						Email approved	0.1.0
2017-09	RAN4-NR AH #3	R4-1709413				Capture TPs approved in the meeting	0.2.0
2017-10	RAN4#84 -Bis	R4-1711985				Capture TPs approved in the meeting	0.3.0
2017-12	RAN4#85	R4-1714546				Capture TPs approved in RAN4#85	0.4.0
2017-12	RAN#78	RP-172407				v1.0.0 submitted for plenary approval	1.0.0
2017-12	RAN#78					Approved by plenary – Rel-15 spec under change control	15.0.0
2018-03	RAN#79	RP-180264	0032		B	CR to TS38.133	15.1.0
2018-06	RAN#80	RP-181075	0037		B	CR to TS 38.133: Implementation of endorsed draft CRs from RAN4 #86bis and RAN4 #87	15.2.0
2018-09	RAN#81	RP-181896	0043		B	CR to TS 38.133: Implementation of endorsed draft CRs from RAN4-AH-1807 and RAN4 #88	15.3.0
2018-12	RAN#82	RP-182763	0057	3	B	CR to TS 38.133: Implementation of endorsed draft CRs from RAN4-88bis and RAN4-89	15.4.0
2019-03	RAN#83	RP-190569	0064	1	B	CR to TS 38.133: Implementation of endorsed draft CRs from RAN4#90	15.5.0
2019-06	RAN#84	RP-191240	0072	1	F	CR to TS 38.133: Implementation of endorsed draft CRs from RAN4#90bis and RAN4#91	15.6.0
2019-06	RAN#84	RP-191248	0066		B	Introduction of band n48	16.0.0
2019-06	RAN#84	RP-191242	0067		B	Introduction of band n14 - CR to TS 38.133	16.0.0
2019-06	RAN#84	RP-191246	0068		B	Introduction of band n30 - CR to TS 38.133	16.0.0
2019-06	RAN#84	RP-191244	0069		B	introduce n18 into TS38.133	16.0.0
2019-06	RAN#84	RP-191250	0070	1	B	n65 introduction to 38.133	16.0.0
2019-09	RAN#85	RP-192034	0077		B	n29 introduction to 38.133	16.1.0
2019-09	RAN#85	RP-192022	0085		A	CR to TS 38.133: Implementation of endorsed draft CRs from RAN4#92 (Rel-16) - Mirrors changes in R4-1910356 for Rel-15 TS 38.133	16.1.0
2019-12	RAN#86	RP-192997	0093		A	Specification of UE antenna gain range	16.2.0
2019-12	RAN#86	RP-192992	0095	1	A	Add RRM Test case setup for 1 AoA in Rx beam peak and 1 in non Rx beam peak	16.2.0
2019-12	RAN#86	RP-192997	0097		A	Update of Parameters, Test case A.7.7.1.1 FR2 Intra-frequency SS-RSRP accuracy	16.2.0
2019-12	RAN#86	RP-192997	0099		A	Update of Parameters, Test case A.5.7.1.1 FR2 Intra-frequency SS-RSRP accuracy	16.2.0
2019-12	RAN#86	RP-192997	0101		A	Update of Parameters, Test case A.7.7.1.2 FR2 Inter-frequency SS-RSRP accuracy	16.2.0
2019-12	RAN#86	RP-192997	0103		A	Update of Parameters, Test case A.5.7.1.2 FR2 Inter-frequency SS-RSRP accuracy	16.2.0
2019-12	RAN#86	RP-192992	0105		A	Correction to Random access test case in FR1 for PSCell in EN-DC	16.2.0
2019-12	RAN#86	RP-193040	0107		A	CR on handover 38.133 - R16	16.2.0
2019-12	RAN#86	RP-192994	0112	1	A	CR on the BWP switch test cases EN-DC FR1 (clause A.4.5.6)	16.2.0
2019-12	RAN#86	RP-192994	0113	1	A	CR on the BWP switch test cases EN-DC FR2 (clause A.5.5.6)	16.2.0
2019-12	RAN#86	RP-192994	0114	1	A	CR on the BWP switch test cases SA FR1 (clause A.6.5.6)	16.2.0
2019-12	RAN#86	RP-192994	0115	1	A	CR on the BWP switch test cases SA FR2 (clause A.7.5.6)	16.2.0
2019-12	RAN#86	RP-193042	0117		A	CR to TS38.133 on correction for BWP switching with SCS changing (Section 8.2.1.2.7, 8.2.2.2.5 and 8.6.2)	16.2.0
2019-12	RAN#86	RP-193040	0121		A	CR on handover RRM requirement (clause 6.1.1.5) (R16)	16.2.0
2019-12	RAN#86	RP-192994	0123		A	CR on test cases for EN-DC FR2 inter-frequency measurement (clause A.5.6.2) (R16)	16.2.0
2019-12	RAN#86	RP-192994	0127	1	A	CR on test cases for Redirection from NR in FR2 to NR in FR2 (clause A.7.3.2.3) (R16)	16.2.0
2019-12	RAN#86	RP-192994	0129	1	A	CR on test cases for FR2 handover (clause A.7.3.1) (R16)	16.2.0
2019-12	RAN#86	RP-193042	0131		A	CR to 38.133 on TCI state switching (Section 8.10) (R16)	16.2.0
2019-12	RAN#86	RP-193009	0133		F	CR on measurement gap applicability requirement for SRVCC	16.2.0
2019-12	RAN#86	RP-192994	0137		A	CR on TC with monitoring PDCCH not in first 3 OFDM symbols R16	16.2.0
2019-12	RAN#86	RP-193021	0139		F	CR to add n90 in the NR operating bands in FR1 (3.5.2)	16.2.0
2019-12	RAN#86	RP-193040	0148	1	A	CR on inter-RAT measurement in TS38.133 (clause 9.4.2, 9.4.3)	16.2.0
2019-12	RAN#86	RP-193042	0151		A	CR to 38.133 R16 Add the missing units to DRX cycle values (Cat A)	16.2.0

2019-12	RAN#86	RP-193005	0152	1	B	CR for Abbreviations for cross link interference (clause 3)	16.2.0
2019-12	RAN#86	RP-193005	0153	1	B	CR for cross link interference measurements (clause 9)	16.2.0
2019-12	RAN#86	RP-193041	0156		A	CR on NR MTTD and MRTD definition for R16	16.2.0
2019-12	RAN#86	RP-193042	0157	1	A	Editorial correction for SCell activation and deactivation delay	16.2.0
2019-12	RAN#86	RP-193039	0159		A	CR for SCell activation delay in FR2	16.2.0
2019-12	RAN#86	RP-193040	0161		A	CR for scheduling restriction due to L1-RSRP measurement	16.2.0
2019-12	RAN#86	RP-192993	0167		A	CR on SSB setting for new gap and SMTC setting (Section A.3.10)	16.2.0
2019-12	RAN#86	RP-192995	0169		A	CR on TS38.133 for EN-DC SS-SINR tests with PSCell in FR1 (Section A.4.7.3)	16.2.0
2019-12	RAN#86	RP-192995	0171		A	CR on TS38.133 for SA SS-SINR tests with PCell in FR1 (Section A.6.7.3)	16.2.0
2019-12	RAN#86	RP-192993	0185		A	CR on cell-reselection test cases for NR SA FR2 R16	16.2.0
2019-12	RAN#86	RP-192995	0187		A	endorsed CR on intra-frequency measurement and reporting for EN-DC FR2 R16	16.2.0
2019-12	RAN#86	RP-192996	0189		A	endorsed CR on intra-frequency measurement and reporting for NR SA FR2 R16	16.2.0
2019-12	RAN#86	RP-192996	0191		A	endorsed CR on RLM scheduling restrictions for EN-DC FR2 R16	16.2.0
2019-12	RAN#86	RP-192996	0193		A	endorsed CR on RLM scheduling restrictions for NR SA FR2 R16	16.2.0
2019-12	RAN#86	RP-192992	0201		A	Correction to PRACH configuration index in test cases_r16	16.2.0
2019-12	RAN#86	RP-193009	0205		B	CR on UMTS inter-RAT measurement requirements	16.2.0
2019-12	RAN#86	RP-193009	0206		B	CR on CSSF for SRVCC	16.2.0
2019-12	RAN#86	RP-193009	0207		B	CR on measurement capability for NR- UMTS for SRVCC	16.2.0
2019-12	RAN#86	RP-193039	0209		A	Correction on the TCI state switching (clause 8.10)	16.2.0
2019-12	RAN#86	RP-193039	0219		A	CR for 38133 editorial for clause 8.1,8.8,8.9,8.10,8.11 in Rel-16	16.2.0
2019-12	RAN#86	RP-193039	0220		A	CR for 38133 editorial for clause 8.5 in Rel-16	16.2.0
2019-12	RAN#86	RP-193039	0221		A	CR for 38133 editorial for clause 9.3 in Rel-16	16.2.0
2019-12	RAN#86	RP-193040	0222		A	CR on 38133 for removal the duplicated reference in clause 2	16.2.0
2019-12	RAN#86	RP-193040	0223		A	CR on 38133 for clause 11 in Rel-16	16.2.0
2019-12	RAN#86	RP-192994	0225	1	A	CR on TC of UE transmit timing (A.4.4.1.1, A.5.4.1.1, A.6.4.1.1, A.7.4.1.1) Rel-16	16.2.0
2019-12	RAN#86	RP-193042	0230		A	Update on requirements related to inter-band EN-DC and NE-DC synchronous requirements	16.2.0
2019-12	RAN#86	RP-193008	0231	1	B	MRTD and MTTD requirements for asynchronous NR-NR DC	16.2.0
2019-12	RAN#86	RP-192995	0233	1	A	Editorial corrections to measurement accuracy tests	16.2.0
2019-12	RAN#86	RP-192992	0235		A	Corrections to SS-RSRQ and SS-SINR OTA tests with SA	16.2.0
2019-12	RAN#86	RP-192992	0237	1	A	Corrections to SS-RSRQ and SS-SINR OTA tests with EN-DC	16.2.0
2019-12	RAN#86	RP-193042	0239	1	A	Editorial corrections to clause 9.2	16.2.0
2019-12	RAN#86	RP-193009	0240		B	Introduction of handover requirements for SRVCC in clause 6.1.2	16.2.0
2019-12	RAN#86	RP-192992	0242		A	Corrections to band applicability of measurement accuracy tests	16.2.0
2019-12	RAN#86	RP-192996	0244		A	Introduction of bandwidth limited OCNG for OTA testing	16.2.0
2019-12	RAN#86	RP-192992	0248		A	Corrections to test cases for SA FR2 inter-frequency measurement (clause A.7.6.2)	16.2.0
2019-12	RAN#86	RP-193041	0250		A	CR to 38.133 NR reporting criteria	16.2.0
2019-12	RAN#86	RP-192993	0264		A	CR on correcting CSI-RS based BFD and link recovery tests for EN-DC in FR1	16.2.0
2019-12	RAN#86	RP-192993	0266		A	CR on correcting CSI-RS based BFD and link recovery tests for SA in FR1	16.2.0
2019-12	RAN#86	RP-192993	0268		A	CR on correcting CSI-RS based BFD and link recovery tests for EN-DC in FR2	16.2.0
2019-12	RAN#86	RP-192993	0270		A	CR on correcting CSI-RS based BFD and link recovery tests for SA in FR2	16.2.0
2019-12	RAN#86	RP-193004	0274	1	B	CR on introducing L1-SINR mapping in TS38.133 R16	16.2.0
2019-12	RAN#86	RP-193040	0276		A	CR on delay uncertainty of RRC Release with redirection requirements in TS 38.133 (Cat A)	16.2.0
2019-12	RAN#86	RP-193040	0278		A	CR on known condition of PSCell addition requirement in NE-DC (Cat A)	16.2.0
2019-12	RAN#86	RP-193041	0280		A	CR on known condition of PSCell addition requirement in NR DC (Cat A)	16.2.0
2019-12	RAN#86	RP-193041	0282		A	CR on RRC Re-establishment requirements in TS 38.133 (Cat A)	16.2.0
2019-12	RAN#86	RP-193041	0284		A	CR on scope of interruption requirements of EN-DC in TS 38.133 (Cat A)	16.2.0
2019-12	RAN#86	RP-193041	0286		A	CR on scope of MTTD requirements in TS 38.133 (Cat A)	16.2.0
2019-12	RAN#86	RP-192994	0288		A	CR on SSB-based RLM test case for EN-DC FR1 (Cat A)	16.2.0
2019-12	RAN#86	RP-192994	0290		A	CR on SSB-based RLM test case for NR SA FR1 (Cat A)	16.2.0
2019-12	RAN#86	RP-193042	0292		A	Editorial CR on clause 8.2 (Cat A)	16.2.0
2019-12	RAN#86	RP-193041	0296		A	CR on NR inter-frequency identification (Cat A)	16.2.0
2019-12	RAN#86	RP-193041	0298		A	CR on NR intra-frequency measurements (Cat A)	16.2.0
2019-12	RAN#86	RP-193039	0312		A	Correction on CSSF within measurement gap (clause 9.1.5.2) (cat-A)	16.2.0
2019-12	RAN#86	RP-193041	0314		A	CR on RLM scheduling restriction (clause 8.1.7) (cat-A)	16.2.0
2019-12	RAN#86	RP-193041	0316		A	CR on SCell activation requirements (clause 8.3.2) (cat-A)	16.2.0
2019-12	RAN#86	RP-193042	0318		A	CR to add QCL definition (clause 3.6) (cat-A)	16.2.0
2019-12	RAN#86	RP-192993	0320		A	CR on power offset in TRS RMC (A.3.17) (cat-A)	16.2.0
2019-12	RAN#86	RP-192995	0322		A	CR to introduce new PDCCH RMC (A.3.1.3.2) (cat-A)	16.2.0

2019-12	RAN#86	RP-192997	0324		A	Maintenance CR for measurement accuracy (clause 10.1) (cat-A)	16.2.0
2019-12	RAN#86	RP-192996	0326		A	FR1 CSI-RS RLM test OOS/IS non-DRX for EN-DC (clause A.4.5.1) (cat-A)	16.2.0
2019-12	RAN#86	RP-192996	0328		A	FR2 CSI-RS RLM test OOS/IS non-DRX for EN-DC (clause A.4.5.1) (cat-A)	16.2.0
2019-12	RAN#86	RP-192996	0330		A	FR1 CSI-RS RLM test OOS/IS non-DRX for SA (clause A.6.5.1) (cat-A)	16.2.0
2019-12	RAN#86	RP-192996	0332		A	FR2 CSI-RS RLM test OOS/IS non-DRX for SA (clause A.6.5.1) (cat-A)	16.2.0
2019-12	RAN#86	RP-192997	0334		A	L1-RSRP delay test FR1 EN-DC (clause A.4.6.3) (cat-A)	16.2.0
2019-12	RAN#86	RP-192997	0336		A	L1-RSRP delay test FR2 EN-DC (clause A.5.6.3) (cat-A)	16.2.0
2019-12	RAN#86	RP-192997	0338		A	L1-RSRP delay test FR1 SA (clause A.6.6.4) (cat-A)	16.2.0
2019-12	RAN#86	RP-192997	0340		A	L1-RSRP delay test FR2 SA (clause A.7.6.3) (cat-A)	16.2.0
2019-12	RAN#86	RP-192996	0344		A	L1-RSRP accuracy test FR2 EN-DC (clause A.5.7.4) (cat-A)	16.2.0
2019-12	RAN#86	RP-192996	0346		A	L1-RSRP accuracy test FR2 SA (clause A.7.7.4) (cat-A)	16.2.0
2019-12	RAN#86	RP-193005	0347	1	B	CR to introduce CLI measurement accuracy requirements	16.2.0
2019-12	RAN#86	RP-193008	0348		B	CR on measurement gap interruption due to async NR-DC	16.2.0
2019-12	RAN#86	RP-193008	0349		B	CR on Interruptions at PSCell/SCell addition/release in async NR-DC	16.2.0
2019-12	RAN#86	RP-193008	0350		B	Introducing euCA related interruption requirements for EN-DC in 38.133 (clause 8.2.1)	16.2.0
2019-12	RAN#86	RP-193008	0351		B	Introducing euCA related interruption requirements for NE-DC in 38.133 (clause 8.2.3)	16.2.0
2019-12	RAN#86	RP-193008	0352	1	B	CR on direct SCell activation delay	16.2.0
2019-12	RAN#86	RP-193039	0358		A	CR 38.133 (8.3.2) Amendment of requirements depending on T_SMTC_Max	16.2.0
2019-12	RAN#86	RP-193039	0360		A	CR 38.133 (8.3.3) Correction of SCell deactivation delay	16.2.0
2019-12	RAN#86	RP-192992	0362	1	A	CR 38.133 (A.7.5.7) TCs for PSCell addition and release delay	16.2.0
2019-12	RAN#86	RP-192995	0366		A	CR to TS 38.133: New common clause with OTA related definitions for FR2 testing (Rel-16)	16.2.0
2019-12	RAN#86	RP-192995	0368		A	CR to TS 38.133: Configuration of NR FR1 cell in NR FR1-FR2 tests (Rel-16)	16.2.0
2019-12	RAN#86	RP-192995	0370		A	CR to TS 38.133: Clarificatins to Antenna Configurations for FR2 (Rel-16)	16.2.0
2019-12	RAN#86	RP-192995	0372		A	CR to TS 38.133: Corrections to CORESET RMCs (Rel-16)	16.2.0
2019-12	RAN#86	RP-192995	0374		A	CR to TS 38.133: Corrections to FR2 test configurations (Rel-16)	16.2.0
2019-12	RAN#86	RP-193042	0376	1	A	Editorial updates (clause 9.4)	16.2.0
2019-12	RAN#86	RP-193039	0378		A	Correction in interruption requirements (clause 8.2)	16.2.0
2019-12	RAN#86	RP-193042	0380	1	A	Editorial updates (Annex B)	16.2.0
2019-12	RAN#86	RP-193040	0382		A	CR on 38133 for MRTD and MTTD in intra-band EN-DC	16.2.0
2019-12	RAN#86	RP-193039	0390		A	Correction to the starting point of the DRX cycle length interval	16.2.0
2019-12	RAN#86	RP-192992	0391		A	CR for MAC-CE based TCI State switch for ENDC (Section A.5.5.8)	16.2.0
2019-12	RAN#86	RP-192993	0392		A	CR for MAC-CE based TCI State switch for NR SA (Section A.7.5.7)	16.2.0
2019-12	RAN#86	RP-192993	0393		A	CR for RRC based TCI State switch for NR SA (Section A.7.5.7)	16.2.0
2019-12	RAN#86	RP-192993	0394		A	CR for RRC based TCI State switch for EN-DC (Section A.5.5.8)	16.2.0
2019-12	RAN#86	RP-192992	0395		A	CR for FR1 handover test cases (Section A.6.3.1.1, A.6.3.1.2, A.6.3.1.3)	16.2.0
2019-12	RAN#86	RP-193041	0396		A	CR on MTTD for intra-band EN-DC	16.2.0
2019-12	RAN#86	RP-193040	0398		A	CR on corrections on NR intra frequency measurement reporting requirements (Section 9.2.4)	16.2.0
2020-03	RAN#87	RP-200401	0405	1	A	[CR] handover requirements 38.133 R16 (Cat A)	16.3.0
2020-03	RAN#87	RP-200401	0412	1	A	[CR] SCell activation delay 38.133 R16 (Cat A)	16.3.0
2020-03	RAN#87	RP-200401	0417		A	Corrections to RRM Test case A.7.1.1.2	16.3.0
2020-03	RAN#87	RP-200401	0419		A	Correction to Active UL BWP for SA intra-frequency event triggered reporting with per-UE gaps	16.3.0
2020-03	RAN#87	RP-200401	0421		A	Correction to FR1-E-UTRA Inter-RAT cell re-selection test cases	16.3.0
2020-03	RAN#87	RP-200401	0423		A	Removal of Time offset between PCell and PSCell in SA RRM Test cases	16.3.0
2020-03	RAN#87	RP-200401	0425		A	Correction to SRS periodicity and Offset for UL transit timing with DRx config	16.3.0
2020-03	RAN#87	RP-200401	0427		A	Update of Test Requirements, FR2 Intra-frequency SS-RSRP accuracy Test cases	16.3.0
2020-03	RAN#87	RP-200401	0429		A	Update of Test requirements, FR2 Inter-frequency SS-RSRP accuracy Test cases	16.3.0
2020-03	RAN#87	RP-200401	0439	1	A	CR on test cases for SA FR2 inter-frequency measurement R16 (section A.7.6.2)	16.3.0
2020-03	RAN#87	RP-200401	0441		A	Editorial corrections for 38.133 Core Part R16 (Cat A)	16.3.0
2020-03	RAN#87	RP-200401	0445	1	A	Editorial corrections for 38.133 Perf Part R16 (Cat A)	16.3.0
2020-03	RAN#87	RP-200401	0454		A	Editorial correction for active TCI state switching delay	16.3.0
2020-03	RAN#87	RP-200401	0462	1	A	Corrections for BWP switch delay R16 (Cat A)	16.3.0
2020-03	RAN#87	RP-200401	0464		A	CR for reference correction on L1-RSRP measurement period (section 9.5.3)	16.3.0

2020-03	RAN#87	RP-200401	0466		A	CR for measurement restriction in FR2 across CCs (section 8.1.2.3, 8.1.3.3, 8.5.2.3, 8.5.3.3, 8.5.5.3, 8.5.6.3, 9.5.5.1, 9.5.5.2)	16.3.0
2020-03	RAN#87	RP-200401	0468		A	CR for SSB based candidate beam detection (section 8.5.5.2)	16.3.0
2020-03	RAN#87	RP-200401	0488		A	CR to TS 38.133: Corrections to FR1-FR2 event triggered test cases Annex A.5 (Rel-16)	16.3.0
2020-03	RAN#87	RP-200401	0490		A	CR to TS 38.133: Corrections to FR1-FR2 event triggered test cases Annex A.7 (Rel-16)	16.3.0
2020-03	RAN#87	RP-200401	0492		A	CR to TS 38.133: Clarifications to AoA setup and AoA cell assignement Annex A.5 (Rel-16)	16.3.0
2020-03	RAN#87	RP-200401	0494		A	CR to TS 38.133: Clarifications to AoA setup Annex A.8 (Rel-16)	16.3.0
2020-03	RAN#87	RP-200401	0496		A	CR to TS 38.133: Addition of TC A.4.7.2.2 (Rel-16)	16.3.0
2020-03	RAN#87	RP-200401	0500		A	Editorial correction of EN-DC FR1 L1-RSRP measurement for beam reporting	16.3.0
2020-03	RAN#87	RP-200401	0502		A	Editorial correction of NR SA FR1 L1-RSRP measurement for beam reporting	16.3.0
2020-03	RAN#87	RP-200401	0509		A	CR on removing one-shot timing adjustment requirements (Cat A)	16.3.0
2020-03	RAN#87	RP-200401	0516		A	Correction to BWP switching delay_r16	16.3.0
2020-03	RAN#87	RP-200401	0518		A	Correction to inter-RAT measurement on LTE serving carrrier_r16	16.3.0
2020-03	RAN#87	RP-200401	0520		A	Correction to configurations for TRS_r16	16.3.0
2020-03	RAN#87	RP-200401	0522		A	Correction to FR1 SA inter-RAT measurement TCs_r16 NOTE The CR is not implemented because the corresponding Cat F CR is not implementable.	16.3.0
2020-03	RAN#87	RP-200401	0524		A	Correction to interruption TCs_r16 NOTE The CR is not implemented because the corresponding Cat F CR is not implementable.	16.3.0
2020-03	RAN#87	RP-200401	0528		A	Correction to RF channels configuration_r16	16.3.0
2020-03	RAN#87	RP-200401	0530		A	Correction to RRC release with redirection TCs_r16	16.3.0
2020-03	RAN#87	RP-200401	0532		A	Correction to UL reconfiguration delay TCs_r16	16.3.0
2020-03	RAN#87	RP-200401	0538		A	CR on SSB RLM test cases EN-DC R16	16.3.0
2020-03	RAN#87	RP-200401	0540		A	CR on SSB RLM test cases SA R16	16.3.0
2020-03	RAN#87	RP-200401	0542		A	CR on cell reselection test cases for FR2 SA R16	16.3.0
2020-03	RAN#87	RP-200401	0544		A	OCNG pattern for TDM-ed SSB R16	16.3.0
2020-03	RAN#87	RP-200401	0564		A	NR editorial correction	16.3.0
2020-03	RAN#87	RP-200401	0580		A	CR 38.133 (8.11) Corrections to PSCell change delay requirements	16.3.0
2020-03	RAN#87	RP-200401	0587		A	PRACH configurations in FR1 SSB based RLM tests	16.3.0
2020-03	RAN#87	RP-200401	0589		A	PRACH configurations in FR1 SSB based BFR tests	16.3.0
2020-03	RAN#87	RP-200375	0437	1	B	CR for Conditional PSCell addition/change RRM requirement	16.3.0
2020-03	RAN#87	RP-200381	0440		B	n26 introduction to 38.133	16.3.0
2020-03	RAN#87	RP-200374	0452	1	B	CR on interruption requirements for NR V2X	16.3.0
2020-03	RAN#87	RP-200372	0455		B	CR on RRM requirement for maximum MIMO layer adaptation	16.3.0
2020-03	RAN#87	RP-200389	0460	1	F	introduce n18 into TS38.133	16.3.0
2020-03	RAN#87	RP-200374	0473	1	B	CR of NR V2X RRM(introduction & reliability of GNSS signal)	16.3.0
2020-03	RAN#87	RP-200374	0476	2	B	CR on NR V2X initiation SLSS 38.133 -R16	16.3.0
2020-03	RAN#87	RP-200401	0479		F	CR to 38.133 NR reporting criteria	16.3.0
2020-03	RAN#87	RP-200382	0486		B	Introduction of n53 into 38.133	16.3.0
2020-03	RAN#87	RP-200371	0498		B	Updates to SA NR interruption requirements for NR-U	16.3.0
2020-03	RAN#87	RP-200401	0510		F	CR on inter-band EN-DC and NE-DC synchronous requirements	16.3.0
2020-03	RAN#87	RP-200375	0511	1	B	CR on DAPS handover requirements	16.3.0
2020-03	RAN#87	RP-200374	0512		B	CR on introducing UE sidelink timing requirements for NR V2X	16.3.0
2020-03	RAN#87	RP-200370	0545	1	F	CR on CLI measurement requirements	16.3.0
2020-03	RAN#87	RP-200370	0546	1	F	CR on CLI measurement accuracy requirements	16.3.0
2020-03	RAN#87	RP-200406	0547		B	CR on Interruptions at SCell activation/deactivation in async NR-DC	16.3.0
2020-03	RAN#87	RP-200406	0548	1	F	CR on direct SCell activation delay	16.3.0
2020-03	RAN#87	RP-200376	0551	1	F	Correction on handover requirements for SRVCC	16.3.0
2020-03	RAN#87	RP-200371	0558	1	B	CR to 38.133 to address NR-U inter-RAT measurements	16.3.0
2020-03	RAN#87	RP-200401	0578		F	CR 38.133 (8.3.2) Correction of error in Rel-16 SCell activation	16.3.0
2020-03	RAN#87	RP-200370	0582		B	CR for conditions for cross link interference measurements (section B)	16.3.0
2020-06	RAN#88	RP-200987	0595		A	[CR] Editorial corrections for 38.133 R16 Core Part - Cat A	16.4.0
2020-06	RAN#88	RP-200987	0596		F	[CR] Editorial corrections for 38.133 R16 Core Part - Cat F	16.4.0
2020-06	RAN#88	RP-200987	0598		A	[CR] Editorial corrections for 38.133 R16 Perf Part - Cat A	16.4.0
2020-06	RAN#88	RP-200966	0599		F	[CR] Delay requirements for direct SCell activation	16.4.0
2020-06	RAN#88	RP-200987	0600		F	[CR] Editorial corrections for 38.133 R16 Perf Part - Cat F	16.4.0
2020-06	RAN#88	RP-200987	0602		A	CR to Intra-frequency handover from FR1 to FR1	16.4.0
2020-06	RAN#88	RP-200987	0606		A	CR to A.6.1.2.1 Cell reselection to higher priority E-UTRAN	16.4.0
2020-06	RAN#88	RP-200987	0608		A	Correction to General test parameters in A.6.6.1.2	16.4.0
2020-06	RAN#88	RP-200987	0620		A	CR on CSSF correction for R16 TS38.133	16.4.0
2020-06	RAN#88	RP-201047	0625	1	B	CR on multiple SCell activation deactivation requirement for R16	16.4.0

2020-06	RAN#88	RP-201047	0626	1	B	CR on multiple SCell activation interruption requirement for R16	16.4.0
2020-06	RAN#88	RP-200987	0629		A	CR on Active TCI State Switching requirements - Rel16	16.4.0
2020-06	RAN#88	RP-201055	0632	2	F	Rapportuer CR for TS38.133	16.4.0
2020-06	RAN#88	RP-201048	0635	2	B	CR on minimum requirement at transition period for UE power saving	16.4.0
2020-06	RAN#88	RP-200958	0636	1	F	CR on interruption requirements for NR V2X	16.4.0
2020-06	RAN#88	RP-200975	0641	1	B	CR on cell identification requirements for NR HST	16.4.0
2020-06	RAN#88	RP-201044	0642	2	B	CR on PRS-RSRP measurement report mapping	16.4.0
2020-06	RAN#88	RP-201044	0645	1	B	CR on SRS RSRP measurement report mapping	16.4.0
2020-06	RAN#88	RP-200973	0646	2	B	CR to TS38.133 on introduction of L1-SINR Measurement Requirement (Section 3.3 and 9)	16.4.0
2020-06	RAN#88	RP-200973	0648	1	B	CR to TS38.133 on introduction of SCell BFRQ Procedure (Section 8.5)	16.4.0
2020-06	RAN#88	RP-200987	0651		A	Add UE Beam assumption for RRM Test cases in A.7.3, A.7.4, A.7.7	16.4.0
2020-06	RAN#88	RP-200987	0653		A	Add UE Beam assumption for RRM Test cases in A.5.3, A.5.4, A.5.7	16.4.0
2020-06	RAN#88	RP-200987	0655		A	Update of FR2 RLM Test cases with 2 Angles of Arrival	16.4.0
2020-06	RAN#88	RP-200987	0657		F	Update of Tx Timing Test cases	16.4.0
2020-06	RAN#88	RP-200987	0659		A	Update of FR2 RLM and BFD-LR Test cases	16.4.0
2020-06	RAN#88	RP-200987	0661		A	Update of FR2 SS-RSRP Test cases	16.4.0
2020-06	RAN#88	RP-200987	0663	1	A	CR on TCI state switch	16.4.0
2020-06	RAN#88	RP-200987	0665		A	CR on PDSCH RMC	16.4.0
2020-06	RAN#88	RP-201047	0668	1	B	CR on active spatial relation switch	16.4.0
2020-06	RAN#88	RP-200976	0671	1	B	CR to TS 38.133: CHO RRM requirement	16.4.0
2020-06	RAN#88	RP-201047	0672	1	B	CR to TS 38.133: RRM requirement for UE-specific CBW change delay	16.4.0
2020-06	RAN#88	RP-201047	0673		B	CR to TS 38.133: RRM requirement for interruption due to UE-specific CBW change	16.4.0
2020-06	RAN#88	RP-200969	0678	1	B	CR to TS 38.133: introducing 2-step RACH core requirements	16.4.0
2020-06	RAN#88	RP-200987	0680		A	Correction of CFRA RSRP threshold	16.4.0
2020-06	RAN#88	RP-200970	0682		B	CR for event triggered reporting tests for CLI	16.4.0
2020-06	RAN#88	RP-200958	0685		B	CR of NR V2X abbreviations	16.4.0
2020-06	RAN#88	RP-200958	0686	1	B	CR of interruption for switching between NR SL and LTE SL	16.4.0
2020-06	RAN#88	RP-200958	0687	2	F	CR of NR V2X editorial correction	16.4.0
2020-06	RAN#88	RP-200971	0689	1	B	38.133 CR on cell re-selection requirements for Rel-16 NR HST	16.4.0
2020-06	RAN#88	RP-201047	0690	1	B	CR on introducing inter-frequency measurements without measurement gap (9.1.5, 9.1.6, 9.3.1, 9.3.4, 9.3.5)	16.4.0
2020-06	RAN#88	RP-200987	0696		A	CR on SMTC period for beam management requirements	16.4.0
2020-06	RAN#88	RP-200987	0698		A	CR for CSI-RS based L1-RSRP measurement period	16.4.0
2020-06	RAN#88	RP-200987	0700		A	CR on RACH test cases with CSI-RS resource R16	16.4.0
2020-06	RAN#88	RP-200987	0704		A	CR on TS38.133 for modification of the layer 3 and layer 1 measurement sharing factor when both SSB and RSSI symbol to be measured are considered	16.4.0
2020-06	RAN#88	RP-200987	0706		A	CR on TS38.133 for modification on number of cells and number of SSB to be measured for FR2 intra-frequency measurement	16.4.0
2020-06	RAN#88	RP-200987	0708		A	[CR] TCI state switch delay 38.133 R16 Cat A	16.4.0
2020-06	RAN#88	RP-201047	0709	1	F	LTE CGI measurements with autonomous gaps for 38.133	16.4.0
2020-06	RAN#88	RP-201042	0710	3	B	Updates to general section for NR-U in 38.133	16.4.0
2020-06	RAN#88	RP-200976	0711	1	F	Correction to DAPS HO requirements in 38.133	16.4.0
2020-06	RAN#88	RP-201049	0712	2	F	SRVCC test case for event triggered reporting	16.4.0
2020-06	RAN#88	RP-201049	0713		F	Gap applicability errors corrected for SRVCC	16.4.0
2020-06	RAN#88	RP-200987	0715		A	Correction of NR SA FR2 inter-freq measurement reporting	16.4.0
2020-06	RAN#88	RP-200968	0717		F	NTA_offset setting for NR coexistence with NB-IoT	16.4.0
2020-06	RAN#88	RP-201042	0718	2	B	CR to TS 38.133: adding NR-U Handover.	16.4.0
2020-06	RAN#88	RP-200975	0723	1	B	CR on cell re-selection requirement for NR-EUTRAN measurement in TS38.133	16.4.0
2020-06	RAN#88	RP-201042	0725	1	B	CR: Introduction of L1-RSRP measurement requirements with CCA	16.4.0
2020-06	RAN#88	RP-200987	0727		A	CR: Correction of L1-RSRP measurement period	16.4.0
2020-06	RAN#88	RP-200987	0729		A	CR to TS 38.133: Correction to CSI-RS configurations in A.3.14 (Rel-16)	16.4.0
2020-06	RAN#88	RP-200987	0731		A	CR to TS 38.133: Correction to SMTC configuration in measurement accuracy tests (Rel-16)	16.4.0
2020-06	RAN#88	RP-200987	0733		A	CR to TS 38.133: Clarifications to AoA setup Annex A.5 (Rel-16)	16.4.0
2020-06	RAN#88	RP-200987	0735		A	CR to TS 38.133: Clarifications to AoA setup Annex A.7 (Rel-16)	16.4.0
2020-06	RAN#88	RP-201048	0736		F	CR for maximum MIMO layer adaptation	16.4.0
2020-06	RAN#88	RP-200987	0738	1	F	Applicability of QCL	16.4.0
2020-06	RAN#88	RP-201047	0741	1	B	CR to 38.133 on SRS carrier switching interruption requirements	16.4.0
2020-06	RAN#88	RP-201047	0742	1	B	CR to 38.133 on impact to measurement requirements due to LTE SRS carrier switching	16.4.0
2020-06	RAN#88	RP-200969	0743	1	B	CR to 38.133 on UE transmit timing requirements for 2-step RACH	16.4.0
2020-06	RAN#88	RP-200987	0744	1	F	CR to 38.133 on intra frequency measurements without gaps	16.4.0
2020-06	RAN#88	RP-200987	0748		A	CR on Psharingfactor_r16	16.4.0

2020-06	RAN#88	RP-200987	0750		A	CR on E-UTRAN Serving Cell Parameters_r16	16.4.0
2020-06	RAN#88	RP-200987	0752		A	CR on Modified parameters for BFD TCs with 4Rx antenna_r16	16.4.0
2020-06	RAN#88	RP-200987	0754		A	CR on BFD TCs_r16	16.4.0
2020-06	RAN#88	RP-200987	0756		A	CR on UL carrier RRC reconfiguration Delay TC_r16	16.4.0
2020-06	RAN#88	RP-200987	0758		A	CR to FR1 SCell activation delay test cases_r16	16.4.0
2020-06	RAN#88	RP-200987	0760		A	CR to inter-frequency measurement TCs_r16	16.4.0
2020-06	RAN#88	RP-200987	0762	1	F	CR to interruption TCs_r16	16.4.0
2020-06	RAN#88	RP-200987	0763	1	F	CR to FR1 SA inter-RAT measurement TCs_r16	16.4.0
2020-06	RAN#88	RP-201047	0764	1	B	CR on introduction of RRM requirements for BWP switching delay on multiple CCs	16.4.0
2020-06	RAN#88	RP-201042	0767	1	B	CR on introduction of Active TCI state switching delay with CCA Requirements for NR-U	16.4.0
2020-06	RAN#88	RP-201042	0768	2	B	CR on introduction of reporting criteria for NR-U	16.4.0
2020-06	RAN#88	RP-201042	0770	1	B	CR on introduction of RRC_INACTIVE state moblity requirements for NR-U	16.4.0
2020-06	RAN#88	RP-200987	0775		A	CR on interruption due to Acitve BWP switch (Cat A)	16.4.0
2020-06	RAN#88	RP-200987	0779		A	CR on UE transmit timing (Cat A)	16.4.0
2020-06	RAN#88	RP-200987	0781		A	Editoral CR on TS 38.133 Rel-16 (Cat A)	16.4.0
2020-06	RAN#88	RP-200987	0783		A	CR on RRC Connection Release with Redirection (Cat A)	16.4.0
2020-06	RAN#88	RP-200987	0785		A	CR on RRC Re-establishment test cases (Cat A)	16.4.0
2020-06	RAN#88	RP-200987	0787		A	CR on Timing advance test cases for EN-DC (Cat A)	16.4.0
2020-06	RAN#88	RP-200987	0789		A	CR on Timing test cases for NR SA (Cat A)	16.4.0
2020-06	RAN#88	RP-201045	0792	1	B	CR on DL interruption Tx switching between two uplink carriers	16.4.0
2020-06	RAN#88	RP-200975	0796	1	B	Cell identification in connected mode for NR-EUTRAN measurement in HST	16.4.0
2020-06	RAN#88	RP-200987	0799		A	Correction onTCI state switching R16	16.4.0
2020-06	RAN#88	RP-200987	0801		A	Accuracy of carrier aggregation in NR R16	16.4.0
2020-06	RAN#88	RP-201049	0802	1	B	Test case for NR to UTRA FDD Inter-RAT handover	16.4.0
2020-06	RAN#88	RP-200976	0804		F	CR on conditional PSCell change requirements	16.4.0
2020-06	RAN#88	RP-200973	0806	1	B	CR on SCell BFD and CBD requirements	16.4.0
2020-06	RAN#88	RP-201047	0808	1	B	CR on interruption requirements for FR2 inter-band CA	16.4.0
2020-06	RAN#88	RP-201047	0809		B	CR on scaling factor CSSFoutside_gap for FR2 inter-band CA	16.4.0
2020-06	RAN#88	RP-201047	0810	1	B	CR on scheduling availability requirements for FR2 inter-band CA	16.4.0
2020-06	RAN#88	RP-200987	0813		A	CR 38.133 (8.10.5) Corrections to RRC-based TCI state change	16.4.0
2020-06	RAN#88	RP-200966	0814		F	CR 38.133 (8.3.4-5) Corrections to Direct SCell activation	16.4.0
2020-06	RAN#88	RP-200987	0816		A	CR 38.133 (8.3.2) Corrections to SCell Activation delay requirements	16.4.0
2020-06	RAN#88	RP-200966	0817	1	F	CR 38.133 (8.3.4-5) Addition of interruption windows for Direct SCell Activation	16.4.0
2020-06	RAN#88	RP-200978	0818	1	B	CR to 38.133 for Introduction of band n259	16.4.0
2020-06	RAN#88	RP-201047	0819	1	B	CR on SCell activation requirements for FR2 inter-band CA	16.4.0
2020-06	RAN#88	RP-200987	0821		A	CR on FR2 measurement requirements outside gaps R16	16.4.0
2020-06	RAN#88	RP-200987	0823		A	CR on inter-RAT RSTD requirements for NE-DC in 38.133 R16	16.4.0
2020-06	RAN#88	RP-200987	0825		A	CR on SCell activation requirements R16	16.4.0
2020-06	RAN#88	RP-200987	0827		A	CR on SSB based L1-RSRP measurement R16	16.4.0
2020-06	RAN#88	RP-200987	0829		A	CR on L1-RSRP delay tests for FR2 R16	16.4.0
2020-06	RAN#88	RP-200987	0831		A	CR to L1-RSRP accuracy TC for FR2 EN-DC R16	16.4.0
2020-06	RAN#88	RP-200987	0833		A	CR to L1-RSRP accuracy TC for FR2 SA R16	16.4.0
2020-06	RAN#88	RP-200987	0835		A	CR to TCI state switch TC R16	16.4.0
2020-06	RAN#88	RP-200970	0836		F	CR on CLI measurement requirements	16.4.0
2020-06	RAN#88	RP-200970	0837	1	F	CR on CLI measurement performance requirements	16.4.0
2020-06	RAN#88	RP-200970	0838		B	CR on test cases for SRS-RSRP measurement accuracy in FR1	16.4.0
2020-06	RAN#88	RP-200970	0839	1	B	CR on test cases for SRS-RSRP measurement accuracy in FR2	16.4.0
2020-06	RAN#88	RP-200970	0840		B	CR on test cases for CLI-RSSI measurement accuracy in FR1	16.4.0
2020-06	RAN#88	RP-200970	0841	1	B	CR on test cases for CLI-RSSI measurement accuracy in FR2	16.4.0
2020-06	RAN#88	RP-200966	0843		B	CR on interruption requirements for direct SCell activation for 38.133	16.4.0
2020-06	RAN#88	RP-200966	0844	1	B	CR on delay requirements for SCell dormancy	16.4.0
2020-06	RAN#88	RP-200966	0845	1	B	CR on interruption requirements for SCell dormancy	16.4.0
2020-06	RAN#88	RP-201044	0847	1	B	CR for gNB Rx-Tx time difference and UL-RTOA report mapping	16.4.0
2020-06	RAN#88	RP-201044	0849	1	B	CR for AoA/ZoA report mapping	16.4.0
2020-06	RAN#88	RP-201048	0854	2	B	Measurement requirements for UEs under power saving mode	16.4.0
2020-06	RAN#88	RP-201044	0857	1	B	NR E-CID reporting criteria requirements	16.4.0
2020-06	RAN#88	RP-201044	0858	1	B	NR E-CID measurement requirements	16.4.0
2020-06	RAN#88	RP-201044	0862	1	B	Positioning measurement accuracy requirements structure in section 10	16.4.0
2020-06	RAN#88	RP-201044	0863	2	B	Reporting criteria for NR RSTD	16.4.0
2020-06	RAN#88	RP-200987	0867		A	Clarification on RLM	16.4.0
2020-06	RAN#88	RP-201042	0869		B	BWP switching interruption requirement due to consistent UL failure in 38.133	16.4.0
2020-06	RAN#88	RP-200969	0871	1	B	Applicability of 2-step RA and 4-step RA in RRM requirements in 38.133	16.4.0
2020-06	RAN#88	RP-200975	0874	1	B	CR to TS 38.133: NR HST beam management requirements	16.4.0

2020-06	RAN#88	RP-201047	0875	1	B	CR on 38133 interruption requirements for BWP switching on multiple CCs	16.4.0
2020-06	RAN#88	RP-200966	0879	1	B	Big CR Introduction of UE requirement for MR-DC early measurement reporting in 38.133	16.4.0
2020-06	RAN#88	RP-201042	0885		B	RRC release with redirection requirements in NR-U in 38.133	16.4.0
2020-06	RAN#88	RP-200988	0886	1	A	Rapportuer CR for TS38.133	16.4.0
2020-06	RAN#88	RP-201047	0887		B	CR: mandatory gap pattern	16.4.0
2020-09	RAN#88	RP-201512	0889		A	CR to Redirection from NR in FR1 to E-UTRAN	16.5.0
2020-09	RAN#88	RP-201512	0891		A	CR to timing advance adjustment accuracy in FR1	16.5.0
2020-09	RAN#88	RP-201512	0895		A	CR to SS-RSRQ Intra-Frequency and Inter-frequency FR1 measurement accuracy	16.5.0
2020-09	RAN#88	RP-201512	0897		A	Update to FR2 240kHz SSB Configurations	16.5.0
2020-09	RAN#88	RP-201512	0899		A	Update of FR2 Random Access Test cases	16.5.0
2020-09	RAN#88	RP-201512	0901		A	Update to FR2 event-triggered reporting RRM Test cases in A.5.6 and A.7.6	16.5.0
2020-09	RAN#88	RP-201512	0903		A	Update to FR2 SS-RSRP RRM Test cases in A.5.7 and A.7.7	16.5.0
2020-09	RAN#88	RP-201512	0905		A	CR to EN-DC timing advance adjustment accuracy in FR2	16.5.0
2020-09	RAN#88	RP-201512	0907		A	CR to configuration of CSI-RS for tracking	16.5.0
2020-09	RAN#88	RP-201512	0909		A	Update of RRC-based Active BWP Switch test cases	16.5.0
2020-09	RAN#88	RP-201512	0911		A	Update to FR2 Annex B RRM side conditions	16.5.0
2020-09	RAN#88	RP-201512	0913		A	Add UE Beam assumption for RRM Test cases in A.5.5	16.5.0
2020-09	RAN#88	RP-201496	0914	1	B	Introduction of the P-MPR 2 bits report mapping in 38.133	16.5.0
2020-09	RAN#88	RP-201512	0922		A	Add UE Beam assumption for RRM Test cases in A.7.5 Rel-16	16.5.0
2020-09	RAN#88	RP-201489	0924	1	F	Maintenance CR for 2-step RA	16.5.0
2020-09	RAN#88	RP-201491	0925	2	B	CR to TS 38.133: PRS RSTD requirements	16.5.0
2020-09	RAN#88	RP-201498	0928	1	F	CR on capabilities for support of event triggering and reporting criteria	16.5.0
2020-09	RAN#88	RP-201512	0931		F	CR for TS38.133 Rel-16, Corrction for SCell activation delay requirement	16.5.0
2020-09	RAN#88	RP-201512	0933		A	CR for TS38.133 Rel-16, Correction for RRM core requirements	16.5.0
2020-09	RAN#88	RP-201512	0935		A	CR for TS38.133 Rel-16, Correction for test cases of BWP switching	16.5.0
2020-09	RAN#88	RP-201498	0937	1	B	CR on CSI-RS based intra-frequency measurement requirement (Introduction, requirement applicability and number of cell and beams)	16.5.0
2020-09	RAN#88	RP-201500	0939	1	B	CR on uplink spatial relation switch delay (section 8.12)	16.5.0
2020-09	RAN#88	RP-201506	0940	1	B	Introduction of SCell activation/deactivation delay requirements for SCells operating with CCA	16.5.0
2020-09	RAN#88	RP-201491	0941	2	B	Revision of CSSF within gap to include NR positioning measurements with gap sharing	16.5.0
2020-09	RAN#88	RP-201491	0942	3	B	Introduction of new MG patterns for NR positioning	16.5.0
2020-09	RAN#88	RP-201491	0943	2	B	Introduction of UE Rx-Tx time difference measurement requirements for NR positioning	16.5.0
2020-09	RAN#88	RP-201512	0946		A	CR on TS38.133 for handover test cases	16.5.0
2020-09	RAN#88	RP-201512	0948		A	CR on TS38.133 for introducing the PDSCH RMC configuration in cell re-selection test cases	16.5.0
2020-09	RAN#88	RP-201493	0950	2	F	CR on TS38.133 for dual active protocol stack handover (Section 6.1.3)	16.5.0
2020-09	RAN#88	RP-201507	0952		F	CR on TS38.133 for intra-frequency measurement definition (Section 9.2.1)	16.5.0
2020-09	RAN#88	RP-201512	0956		A	CR on FR2 measurement capability for R16	16.5.0
2020-09	RAN#88	RP-201506	0957		B	CR on UE measurement capability of NR-U for R16	16.5.0
2020-09	RAN#88	RP-201507	0958	1	B	CR on RRM requirement based on dual DRX for FR1+FR2 CA	16.5.0
2020-09	RAN#88	RP-201506	0959		F	Update NR Frequency Band Groups to include Band n30	16.5.0
2020-09	RAN#88	RP-201506	0960		F	Update NR Frequency Band Groups to include Band n14	16.5.0
2020-09	RAN#88	RP-201506	0961		F	CR for Table number mismatch for CLI performance tests	16.5.0
2020-09	RAN#88	RP-201512	0963		A	CR on Inter-RAT RSTD measurements (section 9.4.4)	16.5.0
2020-09	RAN#88	RP-201512	0965		A	CR on active BWP switch in R16	16.5.0
2020-09	RAN#88	RP-201500	0968	1	F	CR on multiple SCells activation (section 8.3.7)	16.5.0
2020-09	RAN#88	RP-201496	0969	1	F	CR on MRTD and MTTD for FR2 inter-band CA	16.5.0
2020-09	RAN#88	RP-201498	0970	1	B	CR on MRTD for FR2 inter-band CA	16.5.0
2020-09	RAN#88	RP-201498	0971	1	B	38.133 CR on UE measurement capability on the number of frequency layers to be monitored for CSI-RS measurement	16.5.0
2020-09	RAN#88	RP-201497	0972		F	38.133 CR on cell re-selection requirements for Rel-16 NR HST	16.5.0
2020-09	RAN#88	RP-201492	0973	1	F	CR of missed requirements based on the agreed CRs in RAN4#95-e	16.5.0
2020-09	RAN#88	RP-201492	0974	1	F	CR of interruption requirements	16.5.0
2020-09	RAN#88	RP-201500	0976	1	F	CR on definition of inter-frequency measurements without measurement gap (9.3.1)	16.5.0
2020-09	RAN#88	RP-201500	0984		F	CR on BWP switch on multiple CCs	16.5.0
2020-09	RAN#88	RP-201512	0986		A	CR for SCell activation delay in FR2 in R16	16.5.0
2020-09	RAN#88	RP-201512	0988		A	CR on TCI state switch delay in R16	16.5.0
2020-09	RAN#88	RP-201506	0991	1	B	CR for timing requirement for NR-U	16.5.0
2020-09	RAN#88	RP-201488	0992	1	B	CR for introduction of pathloss reference signal switching delay	16.5.0

2020-09	RAN#88	RP-201488	0993	1	F	CR for L1-SINR requirement	16.5.0
2020-09	RAN#88	RP-201498	0996	2	B	CR on introduction, applicability and capability for CSI-RS inter-frequency measurement requirements	16.5.0
2020-09	RAN#88	RP-201500	0999	1	B	Impact of CGI reading on L1 and L3 measurement	16.5.0
2020-09	RAN#88	RP-201498	1003	1	B	38.133 CR on introduction of CSI-RS based measurement	16.5.0
2020-09	RAN#88	RP-201488	1006		F	Correction of L1-SINR reporting requirements	16.5.0
2020-09	RAN#88	RP-201506	1007	2	B	CR: Beam management requirements with CCA	16.5.0
2020-09	RAN#88	RP-201507	1008		F	[CR] Corrections to DAPS Handover	16.5.0
2020-09	RAN#88	RP-201500	1010	2	F	CR for FR2 inter-band CA requirements	16.5.0
2020-09	RAN#88	RP-201506	1011	1	D	CR to TS 38.133 - Handover requirements in NR-U	16.5.0
2020-09	RAN#88	RP-201506	1012	2	B	CR to TS 38.133 to address NR-U inter-frequency measurements	16.5.0
2020-09	RAN#88	RP-201512	1015	1	F	CR 38.133 (8.3.2-3) Corrections to SCell activation delay requirements	16.5.0
2020-09	RAN#88	RP-201494	1016	1	B	CR 38.133 (8.3.9-8.3.11) Direct SCell activation delay for multiple downlink SCells	16.5.0
2020-09	RAN#88	RP-201494	1017	2	F	CR 38.133 SCell dormancy switching of multiple SCells	16.5.0
2020-09	RAN#88	RP-201494	1018		B	CR on delay requirements for SCell dormancy	16.5.0
2020-09	RAN#88	RP-201498	1020	1	B	CR on inter-frequency CSI-RS L3 measurement requirements	16.5.0
2020-09	RAN#88	RP-201512	1023		A	Clarification of SNR values in RLM Test cases	16.5.0
2020-09	RAN#88	RP-201512	1025		A	CR to TS 38.133: Corrections to CSI-RS configurations in A.3.14 (Rel-16)	16.5.0
2020-09	RAN#88	RP-201512	1027		A	CR to TS 38.133: Corrections to event triggered test cases (Rel-16)	16.5.0
2020-09	RAN#88	RP-201512	1029		A	CR to TS 38.133: Corrections to inter-RAT test cases (Rel-16)	16.5.0
2020-09	RAN#88	RP-201512	1031		A	CR to TS 38.133: Corrections to AoA setup information in some test cases (Rel-16)	16.5.0
2020-09	RAN#88	RP-201512	1033		A	CR on maintaining handover tests in Rel-16	16.5.0
2020-09	RAN#88	RP-201500	1039	1	F	CR on maintaining measurement restriction requirements for NR CA	16.5.0
2020-09	RAN#88	RP-201500	1041	3	F	CR on BWP switching delay on mulitple CCs	16.5.0
2020-09	RAN#88	RP-201506	1042	2	F	CR on active TCI state switching for NR-U	16.5.0
2020-09	RAN#88	RP-201506	1043	2	B	CR on introduction of intra-frequency measurements requirements for NR-U	16.5.0
2020-09	RAN#88	RP-201506	1044	1	B	CR on introduction of Active BWP switching delay requirements for NR-U	16.5.0
2020-09	RAN#88	RP-201506	1045	1	B	CR on introduction of RRC_IDLE state moblity requirements for NR-U	16.5.0
2020-09	RAN#88	RP-201506	1046	1	B	Discussion on RRC re-establishment for NR-U	16.5.0
2020-09	RAN#88	RP-201512	1048		A	CR on reporting criteria for EN-DC in 38.133 R15	16.5.0
2020-09	RAN#88	RP-201512	1050		A	CR on test cases for Active TCI state switch delay R15	16.5.0
2020-09	RAN#88	RP-201512	1052		A	Addition of new default configurations for RMC scheduling_r16	16.5.0
2020-09	RAN#88	RP-201512	1054		A	Correction to beam failure detection and link recovery test cases_r16	16.5.0
2020-09	RAN#88	RP-201512	1056		A	Correction to BWP switching delay test cases_r16	16.5.0
2020-09	RAN#88	RP-201512	1058		A	Correction to FR1 intra-frequency measurement with gap test cases_r16	16.5.0
2020-09	RAN#88	RP-201512	1060		A	Correction to inter-RAT HO test cases_r16	16.5.0
2020-09	RAN#88	RP-201498	1064	2	B	CR on CSI-RS based intra-frequency measurement requirements	16.5.0
2020-09	RAN#88	RP-201500	1066	1	F	Correction on the interruption requirements due to SRS carrier switching	16.5.0
2020-09	RAN#88	RP-201500	1067	1	F	CSSF for inter-frequency measurement without gap in FR2 inter-band CA sceneario	16.5.0
2020-09	RAN#88	RP-201512	1070		A	CR on correction to CSSF within gap R16	16.5.0
2020-09	RAN#88	RP-201512	1072		A	CR on SCell activation requirements R16	16.5.0
2020-09	RAN#88	RP-201512	1075		A	CR on UL BWP configuration for RRM test cases R16	16.5.0
2020-09	RAN#88	RP-201512	1077		A	CR to add UE beam assumption for TC in A.5.6 R16	16.5.0
2020-09	RAN#88	RP-201506	1078		F	CR on reporting criteria for CLI	16.5.0
2020-09	RAN#88	RP-201494	1080	1	B	CR on direct SCell activation	16.5.0
2020-09	RAN#88	RP-201494	1081	2	F	CR on requirements for SCell dormancy	16.5.0
2020-09	RAN#88	RP-201491	1082	1	B	CR for general applicability of PRS measurement requirements	16.5.0
2020-09	RAN#88	RP-201491	1083	2	B	CR for measurement requirements for PRS-RSRP	16.5.0
2020-09	RAN#88	RP-201491	1085	2	B	CR to add CSI-RS related reporting criteria for ECID	16.5.0
2020-09	RAN#88	RP-201490	1088	2	F	Correction CR to Rel-16 UE power saving requirements	16.5.0
2020-09	RAN#88	RP-201506	1090		F	Correction to RACH delay in RRC release requirements in NR-U in 38.133	16.5.0
2020-09	RAN#88	RP-201512	1097		A	CR to 38.133 correction to RRC based BWP switch delay requirements	16.5.0
2020-09	RAN#88	RP-201512	1099		A	CR to 38.133 correction to interruption requirements for per-FR gap in FR2	16.5.0
2020-09	RAN#88	RP-201500	1100		B	CR to 38.133 on CGI reading of NR cell	16.5.0
2020-09	RAN#88	RP-201497	1101		F	CR to TS 38.133: Corrections to Table 9.4.3.3-2 in subclause 9.4.3.3 (Requirements when DRX is used)	16.5.0
2020-09	RAN#88	RP-201506	1102	2	B	Introduction of RLM requirements for NR-U	16.5.0

2020-09	RAN#88	RP-201491	1103	2	B	Measurement report mapping and additional path reporting for UE Rx-Tx	16.5.0
2020-09	RAN#88	RP-201491	1104	2	B	Measurement report mapping and additional path reporting for RSTD	16.5.0
2020-09	RAN#88	RP-201491	1106	1	F	Reporting criteria for NR positioning measurements	16.5.0
2020-09	RAN#88	RP-201491	1107		F	General introduction of NR positioning measurements	16.5.0
2020-09	RAN#88	RP-201498	1108	1	B	CR on scheduling restriction for CSI-RS based intra-frequency measurement	16.5.0
2020-09	RAN#88	RP-201507	1111		F	[CR] Replacing x in references with correct numbers (Core R16 Cat F)	16.5.0
2020-09	RAN#88	RP-201512	1113		A	[CR] Replacing x in references with correct numbers (Core R16 Cat A)	16.5.0
2020-09	RAN#88	RP-201512	1114		A	[CR] Replacing x in references with correct numbers (Perf R16 Cat A)	16.5.0
2020-09	RAN#88	RP-201512	1116		A	Fine/rough beam assumption for idle mode and measurement procedure test case	16.5.0
2020-09	RAN#88	RP-201512	1117		A	CR on BWP switching delay requirements R16	16.5.0
2020-12	RAN#90	RP-202433	1108	4	B	CR on scheduling restriction for CSI-RS based intra-frequency measurement	17.0.0
2020-12	RAN#90	RP-202487	1119		A	RB allocation and Noc level in RLM Test cases	17.0.0
2020-12	RAN#90	RP-202487	1121		A	Update FR2 event-triggered reporting Test cases in A.5.6, A.7.6	17.0.0
2020-12	RAN#90	RP-202487	1123		A	240kHz SSB SCS Configuration for FR2 SS-RSRP Test cases	17.0.0
2020-12	RAN#90	RP-202487	1125		A	Correct UE beam assumption for Test Cases in A.5.6	17.0.0
2020-12	RAN#90	RP-202487	1127		A	Aggregation level of CORESET for RMC scheduling	17.0.0
2020-12	RAN#90	RP-202487	1129		A	Claify FR1 NSA SS-SINR measurement TCs	17.0.0
2020-12	RAN#90	RP-202487	1131		A	FR1 Inter-frequency Event triggered Reporting tests in DRX	17.0.0
2020-12	RAN#90	RP-202487	1133		A	E-UTRAN	17.0.0
2020-12	RAN#90	RP-202419	1138		F	CR for DAPS HO test applicability	17.0.0
2020-12	RAN#90	RP-202487	1139		F	Maintenance CR on SA inter-frequency event triggered reporting tests for FR1	17.0.0
2020-12	RAN#90	RP-202433	1140	1	F	CR on CSSF with both CSI-RS and SSB	17.0.0
2020-12	RAN#90	RP-202444	1146		A	CR on CSI-RS BW condition for BFD/CBD R16	17.0.0
2020-12	RAN#90	RP-202444	1148		A	CR on AP-CSI-RS based L1-RSRP measurement R16	17.0.0
2020-12	RAN#90	RP-202427	1152	1	F	CR of NR V2X operating band group	17.0.0
2020-12	RAN#90	RP-202436	1155	1	F	CR on TS38.133 for dual active protocol stack handover	17.0.0
2020-12	RAN#90	RP-202430	1156	2	F	CR on TS38.133 interruption time for CA with non-aligned frame boundaries	17.0.0
2020-12	RAN#90	RP-202444	1158		F	CR on TS38.133 for inter-frequency measurement requirement without gap	17.0.0
2020-12	RAN#90	RP-202487	1160		A	CR on TS38.133 for cell activation and deactivation test case	17.0.0
2020-12	RAN#90	RP-202487	1162		A	CR on TS38.133 for cell reselection test case	17.0.0
2020-12	RAN#90	RP-202487	1164		A	CR on TS38.133 for active BWP switch test cases	17.0.0
2020-12	RAN#90	RP-202487	1165		F	CR on TS38.133 for E-UTRAN	17.0.0
2020-12	RAN#90	RP-202509	1166		F	CR on TS38.133 for SCell activation and deactivation delay test cases	17.0.0
2020-12	RAN#90	RP-202487	1168		A	CR for TS38.133 Rel-16, Correction for RRM core and test cases	17.0.0
2020-12	RAN#90	RP-202433	1171	1	F	CR on abbreviations about CSI-RS based measurement in 38.133.	17.0.0
2020-12	RAN#90	RP-202442	1184		F	CR to TS 38.133: Add information on the inter-band EN-DC and UL CA configurations with no DL interruption	17.0.0
2020-12	RAN#90	RP-202433	1186	1	F	CR on R16 CSI-RS based L3 measurements	17.0.0
2020-12	RAN#90	RP-202419	1187	2	B	Intra-band Inter-frequency sync DAPS handover test in SA for FR1	17.0.0
2020-12	RAN#90	RP-202427	1191	1	F	CR: Interruption requirement for NR V2X synchronization source chang	17.0.0
2020-12	RAN#90	RP-202432	1193		F	Fine/rough beam assumption for CLI performance test cases	17.0.0
2020-12	RAN#90	RP-202435	1194	1	F	38.133 CR on CSSFintra for measurement period for intra-frequency measurements in connected mode for Rel-16 NR HST	17.0.0
2020-12	RAN#90	RP-202486	1196		A	CR on carrier frequency range of PCell/PSCell for the maximum number of RLM-RS resources	17.0.0
2020-12	RAN#90	RP-202487	1209		A	Correction on beamFailureInstanceMaxCount for test cases of availability restriction during FR2 BFR in R16	17.0.0
2020-12	RAN#90	RP-202444	1212	1	F	Correction on unknown SCell activation in FR2.	17.0.0
2020-12	RAN#90	RP-202415	1213	1	B	Big CR on 2-step RA type RRM performance requirements	17.0.0
2020-12	RAN#90	RP-202431	1214	1	F	CR Maintenance 2-step RACH RRM requirements	17.0.0
2020-12	RAN#90	RP-202487	1216		A	Correction of RRM tests	17.0.0
2020-12	RAN#90	RP-202435	1217	1	F	CR on IDLE state cell re-selection requirements for HST in 38.133	17.0.0
2020-12	RAN#90	RP-202487	1225		A	Correction to types of requirements in annex A	17.0.0
2020-12	RAN#90	RP-202487	1227		A	Corrections to frequency range in interfrequency measurement procedures tests	17.0.0
2020-12	RAN#90	RP-202487	1230		A	Correction on TBD values in FR1+FR2 interfrequency RSRP accuracy tests	17.0.0
2020-12	RAN#90	RP-202486	1232		A	Addition of symbol definitions	17.0.0
2020-12	RAN#90	RP-202487	1236		A	Square bracket removal in 38.133 section A.1 to A.5	17.0.0
2020-12	RAN#90	RP-202487	1238		A	Square bracket removal in 38.133 section A.6 to A.8	17.0.0
2020-12	RAN#90	RP-202419	1240	1	B	Conditional handover test cases for NR	17.0.0

2020-12	RAN#90	RP-202414	1241		B	Updates to general section for NR-U in 38.133	17.0.0
2020-12	RAN#90	RP-202486	1250		A	CR on MO merge	17.0.0
2020-12	RAN#90	RP-202444	1252	1	F	CR to TS 38.133 on DCI based BWP switch requirements for cross carrier scheduling	17.0.0
2020-12	RAN#90	RP-202441	1254	1	B	CR on PRS-RSRP report mapping	17.0.0
2020-12	RAN#90	RP-202487	1259		A	Correction to CSI-RS RMC configuration R16	17.0.0
2020-12	RAN#90	RP-202487	1261		A	Correction to cell reselection test cases R16	17.0.0
2020-12	RAN#90	RP-202487	1263		A	Correction to inter-RAT handover test cases R16	17.0.0
2020-12	RAN#90	RP-202487	1265		A	Correction to NR measurement under LTE SA test cases R16	17.0.0
2020-12	RAN#90	RP-202487	1267		A	Correction to inter-RAT SFTD measurement test cases R16	17.0.0
2020-12	RAN#90	RP-202487	1271		A	CR on maintaining BFD/CBD measurements test cases in TS38.133 R16	17.0.0
2020-12	RAN#90	RP-202487	1273		F	CR on maintaining L1-RSRP measurements test cases R16	17.0.0
2020-12	RAN#90	RP-202446	1275	1	F	Correction CR to Rel-16 UE power saving requirements	17.0.0
2020-12	RAN#90	RP-202442	1276		F	Correction on DL interruption on Tx Switching between two uplink carriers	17.0.0
2020-12	RAN#90	RP-202433	1277	1	F	CR on CSI-RS based intra-frequency measurement requirements	17.0.0
2020-12	RAN#90	RP-202444	1281		F	Correction on RRC based spatial relation switch delay	17.0.0
2020-12	RAN#90	RP-202487	1282		F	Correction on SA inter-RAT measurement FR1 test case	17.0.0
2020-12	RAN#90	RP-202444	1283	1	F	CR on BWP switching delay on mulitple CCs	17.0.0
2020-12	RAN#90	RP-202444	1284	1	F	CR on interruption due to active BWP switching on mulitple CCs	17.0.0
2020-12	RAN#90	RP-202414	1288	1	F	CR on TCI state switching requirements for NR-U	17.0.0
2020-12	RAN#90	RP-202414	1291		F	CR on intra-frequency measurement requirements for NR-U	17.0.0
2020-12	RAN#90	RP-202486	1296		A	CR on RRC-based BWP switch requirements_R16	17.0.0
2020-12	RAN#90	RP-202487	1298		A	CR on RRC-based active TCI state switch test case Rel-16	17.0.0
2020-12	RAN#90	RP-202425	1299		F	Update NR Frequency Band Groups to include Band n48	17.0.0
2020-12	RAN#90	RP-202439	1300		F	Update NR Frequency Band Groups to include Band n65	17.0.0
2020-12	RAN#90	RP-202446	1305		F	CR to 38.133: Correction to relaxed measurement requirements	17.0.0
2020-12	RAN#90	RP-202444	1306	1	F	CR to 38.133: Correction to relaxed measurement requirements	17.0.0
2020-12	RAN#90	RP-202444	1307	1	F	CR to 38.133: Correction to SRS carrier based switching requirements	17.0.0
2020-12	RAN#90	RP-202444	1308	1	F	CR to 38.133: Correction to mandatory gap pattern	17.0.0
2020-12	RAN#90	RP-202509	1309		F	[CR] NR Perf Maintenance R16 Cat F	17.0.0
2020-12	RAN#90	RP-202486	1311		A	[CR] Specify RRC processing delay in TCI state switching delay (Cat A)	17.0.0
2020-12	RAN#90	RP-202486	1317		A	CR on SCell activation requirements R16	17.0.0
2020-12	RAN#90	RP-202487	1319		A	CR on FR2 unkown SCell activation test cases R16	17.0.0
2020-12	RAN#90	RP-202487	1321		A	CR on BWP in L1-RSRP delay and accuracy test cases R16	17.0.0
2020-12	RAN#90	RP-202430	1322	1	F	CR on BWP switching and SCell dormancy	17.0.0
2020-12	RAN#90	RP-202441	1324	1	F	CR to update PRS-RSRP measurement requirements	17.0.0
2020-12	RAN#90	RP-202444	1328	1	F	CR on CGI reading requirements 38.133	17.0.0
2020-12	RAN#90	RP-202509	1330		F	[CR] Specify RRC processing delay in TCI state switching delay for R16 NR-U	17.0.0
2020-12	RAN#90	RP-202442	1331		F	Correction of CR0972 implementation	17.0.0
2020-12	RAN#90	RP-202487	1333		F	CR: Correction of CFRA test in FR2 SA	17.0.0
2020-12	RAN#90	RP-202434	1334	1	F	CR: Clarification of L1-SINR reporting with CSI-RS based CMR and dedicated IMR configured	17.0.0
2020-12	RAN#90	RP-202486	1336		A	Introducing reference to the source of the Lmax and NRLM.	17.0.0
2020-12	RAN#90	RP-202430	1338	2	F	CR on UE requirement for MR-DC early measurement reporting in 38.133	17.0.0
2020-12	RAN#90	RP-202444	1340		F	CR on measurement restrictions for FR2 inter-band CA	17.0.0
2020-12	RAN#90	RP-202487	1342		A	CR to TS 38.133: Corrections to inter-RAT FR1 test cases (Rel-16)	17.0.0
2020-12	RAN#90	RP-202487	1344		A	CR to TS 38.133: Corrections to inter-RAT FR2 test cases (Rel-16)	17.0.0
2020-12	RAN#90	RP-202436	1346		F	CR 38.133 Corrections to Conditional PSCell Change delay requirement	17.0.0
2020-12	RAN#90	RP-202444	1347		F	CR 38.133 Removal of brackets for Multiple SCell activation	17.0.0
2020-12	RAN#90	RP-202430	1348	1	F	CR 38.133 Removal of brackets for SCell Dormancy and Direct SCell Activation	17.0.0
2020-12	RAN#90	RP-202487	1350		A	CR 38.133 Correction to test case for TCI state switching (Rel-16)	17.0.0
2020-12	RAN#90	RP-202418	1358	1	F	gNB timing positioning measurement report mapping update for k	17.0.0
2020-12	RAN#90	RP-202446	1360	1	F	Corrections to UE power saving requirements	17.0.0
2020-12	RAN#90	RP-202487	1364		A	Removal of annex B.2.6 on one shot timing adjustment in 38.133	17.0.0
2020-12	RAN#90	RP-202487	1366		F	Correction to NR FR1 DL active BWP switch of Cell with non-DRX in SA (A.6.5.6.2.1)	17.0.0
2020-12	RAN#90	RP-202444	1367	1	F	Correction to RRC based non-simultaneous multiple CC BWP	17.0.0
2020-12	RAN#90	RP-202414	1369		F	Requirements for known cell in RRC re-establishment with CCA	17.0.0
2020-12	RAN#90	RP-202435	1370		F	CR to TS 38.133: Corrections to Tables 9.5.4.1-1 and 9.5.4.2-1.	17.0.0
2020-12	RAN#90	RP-202486	1372	1	A	CR to 38.133 on Active BWP switch and Active TCI State Switching requirements - Rel16	17.0.0
2020-12	RAN#90	RP-202441	1375	2	F	UE positioning measurements: RSTD	17.0.0
2020-12	RAN#90	RP-202414	1384	1	F	Terminology updates for NR-U	17.0.0
2020-12	RAN#90	RP-202414	1387		F	Clause numbering correction	17.0.0
2020-12	RAN#90	RP-202414	1390	1	F	Measurement requirements for NR-U	17.0.0
2020-12	RAN#90	RP-202444	1391		F	Correction in NR SRS carrier-based switching requirements	17.0.0

2020-12	RAN#90	RP-202419	1393	1	B	Introduction of intra-frequency sync and async DAPS HO test cases in FR1	17.0.0
2020-12	RAN#90	RP-202430	1400	1	F	CR to Multi-SCell activation for FR1 intra-band contiguous CA	17.0.0
2020-12	RAN#90	RP-202430	1401		F	CR to Staring point of an Interruption window at Direct SCell activation	17.0.0
2020-12	RAN#90	RP-202414	1403	1	F	Interruption windows and applicability of Scell activation/deactivation requirements for SCells operating with CCA	17.0.0
2020-12	RAN#90	RP-202419	1406		B	CR on inter-band DAPS handover tests	17.0.0
2020-12	RAN#90	RP-202414	1407		F	Correction to timing requirements in NR-U	17.0.0
2020-12	RAN#90	RP-202417	1409		B	Big CR: Introduction of Rel-16 NR UE Power Saving RRM Performance requirements (TS 38.133)	17.0.0
2020-12	RAN#90	RP-202421	1410		B	Big CR: Introduction of Rel-16 NR FR1 RF WI RRM performance requirements	17.0.0
2020-12	RAN#90	RP-202422	1411		B	Big CR: NR HST RRM performance requirements	17.0.0
2020-12	RAN#90	RP-202487	1413		A	[CR] NR Perf Maintenance R16 Cat A	17.0.0
2021-03	RAN#91	RP-210116	1418		A	[CR] RRM test case maintenance R17 Cat A	17.1.0
2021-03	RAN#91	RP-210116	1424		A	Update FR2 Reference channels and OCNG for FR2 RRM Test cases	17.1.0
2021-03	RAN#91	RP-210116	1427		A	CR to FR1 SA SS-SINR measurement TCs	17.1.0
2021-03	RAN#91	RP-210116	1430		A	CR on E-UTRA carrier for EN-DC event triggered reporting tests	17.1.0
2021-03	RAN#91	RP-210116	1433		A	Add missing FR2 Test case setups and Beam assumptions	17.1.0
2021-03	RAN#91	RP-210091	1437		A	[CR] Core maintenance for 38.133 (Cat A)	17.1.0
2021-03	RAN#91	RP-210071	1446		A	CR on maintenance for inter-band FR2 CA RRM R17	17.1.0
2021-03	RAN#91	RP-210071	1448		A	CR on UE behavior for UE specific CBW change R17	17.1.0
2021-03	RAN#91	RP-210091	1450		A	CR on IDLE/INACTIVE RRM requirement with SMTC2-LP R17	17.1.0
2021-03	RAN#91	RP-210070	1456		A	CR to 38.133 on Link Recovery requirements (R17)	17.1.0
2021-03	RAN#91	RP-210070	1458		A	CR to 38.133 on Pathloss activation delay requirements (R17)	17.1.0
2021-03	RAN#91	RP-210097	1469		B	CR for TS 38.133 introduction of NR band n24	17.1.0
2021-03	RAN#91	RP-210076	1482		A	CR on CSI-RS based L3 measurement	17.1.0
2021-03	RAN#91	RP-210081	1489		A	CR on PRS RSTD measurement requirements	17.1.0
2021-03	RAN#91	RP-210116	1496		A	Correction to cell reselection test case	17.1.0
2021-03	RAN#91	RP-210066	1498		A	Correction to cell reselection test case for UE Power saving	17.1.0
2021-03	RAN#91	RP-210073	1502		A	2-step RACH RRM performance requirements corrections	17.1.0
2021-03	RAN#91	RP-210116	1505		F	Update of DRX configuration in FR1 Event-triggered Test cases	17.1.0
2021-03	RAN#91	RP-210072	1507		A	Big CR-Introduction of NR V2X RRM performance requirements (Rel-17)	17.1.0
2021-03	RAN#91	RP-210070	1511		A	Correction on the measurement restriction for CSI-IM resource in R17	17.1.0
2021-03	RAN#91	RP-210116	1514		A	Correction on PRACH configuration for FR2 Non-Contention based Random Access in R17	17.1.0
2021-03	RAN#91	RP-210116	1517		A	Correction on PRACH configuration for Beam Failure Detection and Link Recovery Test in R17	17.1.0
2021-03	RAN#91	RP-210116	1520		A	Correction on PRACH RMC for FR1 CSI-RS based Non-Contention based Random Access for BFR in R17	17.1.0
2021-03	RAN#91	RP-210071	1522		A	Correction on scheduling availability and measurement restriction on FR2 inter-band CA in R17	17.1.0
2021-03	RAN#91	RP-210077	1527		A	CR on HST RRM requirements in connected mode	17.1.0
2021-03	RAN#91	RP-210070	1534		A	CR to TS38.133 on L1-SINR measurement requirement	17.1.0
2021-03	RAN#91	RP-210064	1536		A	Big CR: Introduction of Rel-16 NR eMIMO RRM performance requirements and test cases	17.1.0
2021-03	RAN#91	RP-210117	1539		A	CR on Scell activation delay maintenance (R17)	17.1.0
2021-03	RAN#91	RP-210091	1542		A	Interruption requirements maintenance in NR-DC (R17)	17.1.0
2021-03	RAN#91	RP-210077	1544		A	CR on HST core part maintenance (R17)	17.1.0
2021-03	RAN#91	RP-210116	1547		A	CR for test requirements correction of SA event triggered reporting tests for FR1 inter-frequency measurements with SSB time index detection when DRX is used	17.1.0
2021-03	RAN#91	RP-210117	1550		A	CR on R15 remaining issues	17.1.0
2021-03	RAN#91	RP-210072	1552		A	CR on V2X interruption	17.1.0
2021-03	RAN#91	RP-210091	1556		A	CR for measurement period requirements correction	17.1.0
2021-03	RAN#91	RP-210122	1560		A	Update on interruption test cases for Tx switching R17	17.1.0
2021-03	RAN#91	RP-210076	1562		A	Maintenance CR for CSI-RS based L3 measurement requirements R17	17.1.0
2021-03	RAN#91	RP-210116	1565		A	Correction on the power of the first preamble for random access in EN-DC and SA in R17	17.1.0
2021-03	RAN#91	RP-210116	1568		A	Correction on the time for Scell activation and CSI-report in R17	17.1.0
2021-03	RAN#91	RP-210116	1571		A	Correction on the Noc level in TS38.133 in R17	17.1.0
2021-03	RAN#91	RP-210079	1578		A	CR on TS38.133 for Pcell change	17.1.0
2021-03	RAN#91	RP-210071	1586		A	CR on TS38.133 for inter-frequency measurement requirement without gap	17.1.0
2021-03	RAN#91	RP-210122	1600		A	Big CR: Introduction of Rel-16 NR RRM enhancements WI performance requirements and test cases (Rel-17)	17.1.0
2021-03	RAN#91	RP-210084	1602		A	CR: Introduction of random access requirements with CCA	17.1.0
2021-03	RAN#91	RP-210084	1604		A	CR: Beam management requirements with CCA	17.1.0
2021-03	RAN#91	RP-210117	1607		A	CR on the filter for beam failure indications in 38.133	17.1.0

2021-03	RAN#91	RP-210116	1616		A	Correction to Aperiodic CSI-RS configurations R17	17.1.0
2021-03	RAN#91	RP-210116	1619		A	Correction to radio link monitoring test cases R17	17.1.0
2021-03	RAN#91	RP-210116	1622		A	Correction to beam failure recovery test cases R17	17.1.0
2021-03	RAN#91	RP-210116	1625		A	Correction to L1-RSRP reporting delay test cases R17	17.1.0
2021-03	RAN#91	RP-210084	1631		A	CR on measurement requirements for NR-U	17.1.0
2021-03	RAN#91	RP-210122	1636		A	CR on maintaining Antenna configurations in TS38.133 R17	17.1.0
2021-03	RAN#91	RP-210122	1639		A	CR on test requirements for measurement performance tests R17	17.1.0
2021-03	RAN#91	RP-210070	1643		A	CR on maintaining L1-SINR measurent requirements Rel-17	17.1.0
2021-03	RAN#91	RP-210093	1646	1	F	CR on condition requirements for UE power class 5 in TS38.133	17.1.0
2021-03	RAN#91	RP-210071	1648		A	Correction on interruptions of SRS carrier switching	17.1.0
2021-03	RAN#91	RP-210071	1652		A	UL spatial relation switching to an unknown DL RS	17.1.0
2021-03	RAN#91	RP-210116	1655		A	Correction on test cases of inter-frequency Measurements R17	17.1.0
2021-03	RAN#91	RP-210122	1660		A	Correction on test cases of DL interruptions at switching between two uplink carriers	17.1.0
2021-03	RAN#91	RP-210081	1670		A	CR to 38.133 correction on CCSF for NR measurements for positioning	17.1.0
2021-03	RAN#91	RP-210072	1672		A	CR to 38.133 correction on reselection of V2X synchronization reference source requirements	17.1.0
2021-03	RAN#91	RP-210066	1675		A	Test case for cell reselection to FR2 intra-frequency NR case for UE configured with relaxed measurement	17.1.0
2021-03	RAN#91	RP-210076	1679		A	Correction on CSSFoutsidegap	17.1.0
2021-03	RAN#91	RP-210077	1683		A	Correction on inter-RAT measurement in high speed scenario	17.1.0
2021-03	RAN#91	RP-210085	1690		A	Correction on inter-RAT E-UTRAN cells for UE configured with relaxed measurement criterion	17.1.0
2021-03	RAN#91	RP-210084	1691		A	Maintenance CR for NR-U core requirements	17.1.0
2021-03	RAN#91	RP-210091	1697		A	Correction of band group notation for FR2	17.1.0
2021-03	RAN#91	RP-210087	1699		A	Correction to Idle Mode CA/DC Measurements for Inactive mode	17.1.0
2021-03	RAN#91	RP-210087	1701		A	CR clarifying the UE measurement requirements for an SCell with dormant BWP	17.1.0
2021-03	RAN#91	RP-210087	1703		A	Correction to simultaneous DCI based BWP switch delay on multiple CCs	17.1.0
2021-03	RAN#91	RP-210116	1714		A	CR to TS 38.133: Redundant and incorrect TCI state in tests with TRS (Rel-17)	17.1.0
2021-03	RAN#91	RP-210071	1721		A	CR 38.133 (8.6.2A) Clarification on DCI-triggered BWP switch on multiple CCs	17.1.0
2021-03	RAN#91	RP-210084	1723		A	Updates in RLM requirements for NR-U	17.1.0
2021-03	RAN#91	RP-210084	1727		A	Terminology updates for NR-U in 38.133	17.1.0
2021-03	RAN#91	RP-210081	1733		A	PRS-RSRP measurement requirements	17.1.0
2021-03	RAN#91	RP-210076	1737		A	38.133 CR on the CSI-RS based measurement requirements	17.1.0
2021-03	RAN#91	RP-210084	1739		A	Applicability of RA with CCA on RRM requirements in NR-U in 38.133	17.1.0
2021-03	RAN#91	RP-210084	1744		A	CR on Active TCI state switching for NR-U (cat A)	17.1.0
2021-03	RAN#91	RP-210071	1746		A	CR on maintenance on BWP switch requirements on multiple CCs (cat A)	17.1.0
2021-03	RAN#91	RP-210116	1751		A	CR on test cases for inter-RAT measurement r17	17.1.0
2021-03	RAN#91	RP-210117	1754		A	CR on SCell activation delay, cell idenfication requirements on deactivated SCell and inter-RAT ECID requirements for NE-DC R17	17.1.0
2021-03	RAN#91	RP-210116	1757		A	CR on SCell activation TCs R17	17.1.0
2021-03	RAN#91	RP-210087	1759		A	CR on EMR requirement maintenance in 38.133 R17	17.1.0
2021-03	RAN#91	RP-210087	1761		A	CR on SCell dormancy switching R17	17.1.0
2021-03	RAN#91	RP-210071	1771		A	CR on multiple SCell activation requirements R17	17.1.0
2021-03	RAN#91	RP-210071	1773		A	CR on CGI reading requirements 38.133 R17	17.1.0
2021-03	RAN#91	RP-210116	1781		A	Cat-A CR to addition of TRS Configurations in Rel-17 Test Cases	17.1.0
2021-03	RAN#91	RP-210091	1788		A	Cat-A CR to addition of TRS Configurations in Rel-17 Test Case	17.1.0
2021-03	RAN#91	RP-210116	1790		A	CR on correcting SSB and RACH configuration in CSI-RS based beam failure detection and link recovery tests	17.1.0
2021-03	RAN#91	RP-210084	1792		A	CR on Interruptions during Scell activation in NR-U	17.1.0
2021-03	RAN#91	RP-210076	1796		A	CR on core requirement for CSI-RS L3 measurement	17.1.0
2021-03	RAN#91	RP-210091	1797		A	Maintenance CR on interruption at EUTRA SRS carrier switching in 38.133	17.1.0
2021-03	RAN#91	RP-210091	1798		A	Maintenance CR on SCell activation delay requirement in TS38.133	17.1.0
2021-03	RAN#91	RP-210081	1799		A	CR to TS 38.133 on UE Rx-Tx time difference measurements (section 9.9.4)	17.1.0
2021-03	RAN#91	RP-210077	1801		F	CR on introduction of missing HST test cases	17.1.0
2021-06	RAN#92	RP-211083	1809		A	CR to A.3.14 CSI-RS configurations for nzp-CSI-RS-ResourceId values	17.2.0
2021-06	RAN#92	RP-211083	1812		A	CR to Interruptions during measurements on deactivated NR SCC	17.2.0
2021-06	RAN#92	RP-211083	1815		A	CR to CSI-RS based L1-RSRP measurement on resource set with repetition off TCs	17.2.0
2021-06	RAN#92	RP-211084	1818		A	CR to the notation of SMTC in the general test parameters of Re-establishment TCs	17.2.0
2021-06	RAN#92	RP-211084	1821		A	CR to BWP configuration for interruption test case.	17.2.0

2021-06	RAN#92	RP-211084	1827		A	Update of DRX configuration in Event-triggered Test cases	17.2.0
2021-06	RAN#92	RP-211084	1833		A	Update RRM Test cases where 66RBs gives insufficient dB range	17.2.0
2021-06	RAN#92	RP-211084	1836		A	Update Reference channels and OCNG for FR2 240kHz SSB SCS RRM Test cases	17.2.0
2021-06	RAN#92	RP-211084	1839		A	Cat-A CR to Cell Reselection Tests with Async Cells in Rel-17	17.2.0
2021-06	RAN#92	RP-211085	1841		A	Cat-A CR to Cell Reselection Tests with Async Cells in Rel-17	17.2.0
2021-06	RAN#92	RP-211085	1844		A	Cat-A CR to FR2 CORESET and Search Space RMC in Rel-17	17.2.0
2021-06	RAN#92	RP-211085	1847		A	Cat-A CR to PDSCH RMC in Rel-17	17.2.0
2021-06	RAN#92	RP-211085	1850		A	Cat-A CR to TRS Configuration in Rel-17 Test Case	17.2.0
2021-06	RAN#92	RP-211085	1852		A	Cat-A CR to FR1 Single SCell activation requirement with TCI activation in Rel-17	17.2.0
2021-06	RAN#92	RP-211085	1857		A	Maintenance CR for test cases - R17 Cat A	17.2.0
2021-06	RAN#92	RP-211104	1859		A	Correction to cell reselection test case for HST	17.2.0
2021-06	RAN#92	RP-211104	1861		A	Correction to cell reselection test case for UE Power saving	17.2.0
2021-06	RAN#92	RP-211085	1864		A	CR on BFD and link recovery test cases	17.2.0
2021-06	RAN#92	RP-211101	1867		A	CR on CSI-RS intra-frequency requirement and scheduling restriction	17.2.0
2021-06	RAN#92	RP-211101	1868		A	CR on CSI-RS based measurement requirements	17.2.0
2021-06	RAN#92	RP-211103	1872		A	CR on PRS RSTD measurement requirements	17.2.0
2021-06	RAN#92	RP-211101	1876		A	CR for clarification on frequency layer merging R17	17.2.0
2021-06	RAN#92	RP-211104	1878		A	CR on legacy Rel-16 HST NR UE measurement requirements (R17)	17.2.0
2021-06	RAN#92	RP-211097	1880		A	CR on RRC based BWP switching on multiple CCs of EN-DC for FR1 (R17)	17.2.0
2021-06	RAN#92	RP-211104	1882		A	Correction on the power of the first preamble for 2-step RACH	17.2.0
2021-06	RAN#92	RP-211095	1883		A	Terminology update for NR-U	17.2.0
2021-06	RAN#92	RP-211086	1887		A	Maintenance on CSSF for EN-DC and deactivated SCell measurement R17	17.2.0
2021-06	RAN#92	RP-211095	1889		A	CR on reference cell availability for NR-U R17	17.2.0
2021-06	RAN#92	RP-211095	1891		A	CR on SCell activation requirement for NR-U R17	17.2.0
2021-06	RAN#92	RP-211097	1893		A	CR on interruption for SCell addition/release R17	17.2.0
2021-06	RAN#92	RP-211086	1898		A	Core requirement maintenance on signal characteristics (R17)	17.2.0
2021-06	RAN#92	RP-211104	1902		A	CR to 38.133 on Link recovery requirements - R17	17.2.0
2021-06	RAN#92	RP-211097	1907		A	CR to introduce testcase for RRC based BWP switch on multiple CCs- SA in FR2 -R17	17.2.0
2021-06	RAN#92	RP-211097	1908		A	CR to 38.133 on Uplink Spatial relation switch for PUCCH - R17	17.2.0
2021-06	RAN#92	RP-211102	1912	1	A	CR on CSSFintra for HST measurement requirements	17.2.0
2021-06	RAN#92	RP-211102	1914	1	F	CR on test case on NR intra-frequency cell reselection for HST	17.2.0
2021-06	RAN#92	RP-211097	1924		A	CR for test cases for simultaneous DCI and Timer based BWP switch on multiple CCs for NR SA	17.2.0
2021-06	RAN#92	RP-211081	1930	1	A	Correction on the SS-RSRP difference value for SS-RSRP measurement TC in R17	17.2.0
2021-06	RAN#92	RP-211081	1933	1	A	Correction on the CSI-reporting period for SCell activation delay in R17	17.2.0
2021-06	RAN#92	RP-211103	1935	1	A	Introduce the SCell beam failure recovery without the dedicated PUCCH resource in R17	17.2.0
2021-06	RAN#92	RP-211086	1940		A	CR on scheduling restriction of UE during intra-frequency measurements on FR2 in R17	17.2.0
2021-06	RAN#92	RP-211119	1942		A	CR on TS38.133 for direct Scell activation	17.2.0
2021-06	RAN#92	RP-211097	1944		A	CR on TS38.133 for typo modifications on intra frequency and inter frequency measurement requirement	17.2.0
2021-06	RAN#92	RP-211097	1946		A	CR to 38.133 correction on SRS carrier based switching core requirements	17.2.0
2021-06	RAN#92	RP-211097	1948		A	CR to 38.133 correction on SRS carrier based switching test cases	17.2.0
2021-06	RAN#92	RP-211101	1950		A	CR to 38.133 Correction on core requirements for CSI-RS based measurement	17.2.0
2021-06	RAN#92	RP-211105	1954		A	CR to 38.133 correction on CCSF for NR measurements for positioning	17.2.0
2021-06	RAN#92	RP-211097	1959		A	CR on TS38.133 inter-frequency without gap -r17 NOTE Part of the CR is not implemented because changes to clause 9.1.5.1 have no track marks.	17.2.0
2021-06	RAN#92	RP-211105	1970		A	CR to 38.133 Correction on the requirement of FR2 L1-SINR measurement accuracy (Rel-17)	17.2.0
2021-06	RAN#92	RP-211116	1974		B	CR to TS 38.133: Introduction of band n67	17.2.0
2021-06	RAN#92	RP-211116	1975		B	CR to TS 38.133: Introduction of band n85	17.2.0
2021-06	RAN#92	RP-211106	1977		A	CR on UE Rx-Tx time difference measurement period	17.2.0
2021-06	RAN#92	RP-211087	1983		A	CR to TS 38.133: Correction of TDD Configuration for several TCs (Rel-17)	17.2.0
2021-06	RAN#92	RP-211087	1986		A	CR to TS 38.133: Correction of OCNG pattern for several TCs (Rel-17)	17.2.0
2021-06	RAN#92	RP-211087	1989		A	CR to TS 38.133: Correction of IRAT TCs (Rel-17)	17.2.0
2021-06	RAN#92	RP-211087	1992		A	CR to TS 38.133: Corrections to SS-RSRP/RSRQ/SINR accuracy TCs (Rel 17)	17.2.0

2021-06	RAN#92	RP-211087	1995		A	CR to TS 38.133: Several corrections to TCs (Rel 17)	17.2.0
2021-06	RAN#92	RP-211087	1997		F	CR on maintaining condition requirements in TS38.133 R17	17.2.0
2021-06	RAN#92	RP-211106	1999		A	CR on maintaining L1-SINR measurent accuracy requirements R17	17.2.0
2021-06	RAN#92	RP-211106	2001		A	CR on maintaining L1-SINR measurement accuracy tests R17	17.2.0
2021-06	RAN#92	RP-211106	2003		A	CR on maintaining L1-SINR measurent requirements R17	17.2.0
2021-06	RAN#92	RP-211097	2005		A	CR on maintaining SCell activation and deactication delay test for FR2 inter-band CA R17	17.2.0
2021-06	RAN#92	RP-211106	2007		A	CR on maintaining sync conditions for intra-band DAPS handover R17	17.2.0
2021-06	RAN#92	RP-211106	2009		A	CR on maintaining interruptions for intra-band DAPS handover R17	17.2.0
2021-06	RAN#92	RP-211107	2014		F	CR on maintaining condition requirements for UE power class 5	17.2.0
2021-06	RAN#92	RP-211095	2020		A	CR on Active TCI state switching for NR-U R17	17.2.0
2021-06	RAN#92	RP-211095	2022		A	CR on RLM requirements NR-U R17	17.2.0
2021-06	RAN#92	RP-211095	2024		A	CR on beam management requirements for NR-U R17	17.2.0
2021-06	RAN#92	RP-211095	2026		A	CR on measurement requirements for NR-U R17	17.2.0
2021-06	RAN#92	RP-211095	2028		A	CR on CSSF for NR-U R17	17.2.0
2021-06	RAN#92	RP-211098	2030		A	CR on maintenance of BWP Switch on multiple CCs 38133 R17	17.2.0
2021-06	RAN#92	RP-211087	2033		A	CR on measurement on deactivated SCell and interruption to NR serving cells for measurements on deactivated NR SCell	17.2.0
2021-06	RAN#92	RP-211101	2037		A	CR on time validity of the detected associatedSSB	17.2.0
2021-06	RAN#92	RP-211107	2041		A	Correction on test cases for inter-RAT cell identification in connected mode for HST	17.2.0
2021-06	RAN#92	RP-211101	2045		A	Adding intra-frequency CSI-RS measurement in CSSF	17.2.0
2021-06	RAN#92	RP-211098	2051		A	Correction on SRS carrier switching	17.2.0
2021-06	RAN#92	RP-211103	2053	1	F	CR on condition requirements for L1-SINR measurements R17	17.2.0
2021-06	RAN#92	RP-211109	2055		A	Correction of test case of link recovery with link recovery requests	17.2.0
2021-06	RAN#92	RP-211088	2058		A	Correction to CSI-RS reference configuration_R17	17.2.0
2021-06	RAN#92	RP-211088	2062		A	Correction to reference configurations related to DLBWP.0.2_R17	17.2.0
2021-06	RAN#92	RP-211089	2065		A	Correction to TRS reference configuration_R17	17.2.0
2021-06	RAN#92	RP-211089	2068		A	Correction to interruption during measurement on deactivated SCell test cases_R17	17.2.0
2021-06	RAN#92	RP-211089	2071		A	Correction to FR1 test cases using DLBWP.0.2_R17	17.2.0
2021-06	RAN#92	RP-211089	2076		A	Correction of test parameters for SA inter-frequency event triggered reporting TCs	17.2.0
2021-06	RAN#92	RP-211089	2078		A	CR on Rel-15 SCell activation, SMTC determination and UL timing 38133 R17	17.2.0
2021-06	RAN#92	RP-211119	2080		A	CR on EMR requirements correction 38133 R17	17.2.0
2021-06	RAN#92	RP-211119	2082		A	CR on direct SCell activation R17	17.2.0
2021-06	RAN#92	RP-211119	2084		A	CR on SCell dormancy requirements R17	17.2.0
2021-06	RAN#92	RP-211109	2086		A	CR on MG for PRS measurement 38.133 R17	17.2.0
2021-06	RAN#92	RP-211109	2094		A	CR on CSSF and measurement capability for PRS measurement 38.133 R17	17.2.0
2021-06	RAN#92	RP-211098	2096		A	CR on SSB offset in multiple SCell activation R17	17.2.0
2021-06	RAN#92	RP-211098	2098		A	CR on SMTC alignment in multiple SCell activation R17	17.2.0
2021-06	RAN#92	RP-211101	2100		A	CR on CSI-RS measurement window R17	17.2.0
2021-06	RAN#92	RP-211119	2105		A	Big CR 38.133: Introduction of Rel-16 MR-DC Direct SCell activation and SCell dormancy RRM performance requirements NOTE Part of the CR is not implemented because CCR.2.3 TDD" are already exist	17.2.0
2021-06	RAN#92	RP-211090	2111		A	CR on NR-DC PSCell addition and release delay in Rel17 - Cat A	17.2.0
2021-06	RAN#92	RP-211090	2114		A	Maintenance CR for RRM test cases in Rel17 - Cat A	17.2.0
2021-06	RAN#92	RP-211098	2118		A	CR on test case for RRC-based BWP switch on multiple CCs - TC3 in Rel-17 - Cat A	17.2.0
2021-06	RAN#92	RP-211110	2121		A	Changes to cell reselection tests under power saving	17.2.0
2021-06	RAN#92	RP-211119	2127		A	CR for Direct SCell activation delay	17.2.0
2021-06	RAN#92	RP-211119	2131		A	CR Correction of activation delay for Direct activated SCell	17.2.0
2021-06	RAN#92	RP-211091	2139		A	Correction to AoA setup in FR2	17.2.0
2021-06	RAN#92	RP-211091	2141		A	Correction to AoA setup and beam assumptions in FR2 tests in Rel-16	17.2.0
2021-06	RAN#92	RP-211110	2143		A	Correction to beam assumptions in L1-SINR FR2 tests	17.2.0
2021-06	RAN#92	RP-211098	2145		A	Correction to beam assumptions in FR2 tests on Rel-16 Mandatory gaps	17.2.0
2021-06	RAN#92	RP-211098	2147		A	Correction to beam assumptions in FR2 tests on UL spatial relation	17.2.0
2021-06	RAN#92	RP-211110	2149		A	Correction to HO tests in FR2 under mobility enhancements	17.2.0
2021-06	RAN#92	RP-211110	2153		A	PRS-RSRP measurement requirements	17.2.0
2021-06	RAN#92	RP-211101	2159		A	(R17mirror) CR: RRM congestion control test cases for NR V2X	17.2.0
2021-06	RAN#92	RP-211098	2160		A	(R17mirror) CR: CGI reading test	17.2.0
2021-06	RAN#92	RP-211098	2161		A	(R17mirror) CR: UL spatial relation test	17.2.0
2021-06	RAN#92	RP-211095	2163		A	Interruption during Scell activation requirements for SCells operating with CCA	17.2.0

2021-06	RAN#92	RP-211095	2165		A	SI reading time in RRC mobility control	17.2.0
2021-06	RAN#92	RP-211095	2169		A	Updates in SCell activation in NR-U	17.2.0
2021-06	RAN#92	RP-211095	2171		A	NR-U bands	17.2.0
2021-06	RAN#92	RP-211095	2173		A	Big CR: Introduction of Rel-16 NR-U RRM performance	17.2.0
2021-06	RAN#92	RP-211119	2175		A	CR for core requirement maintenance on direct SCell activation R17	17.2.0
2021-06	RAN#92	RP-211119	2177		A	Big CR: Introduction of Rel-16 MR-DC EMR RRM performance requirements (TS 38.133) NOTE Part of the CR is not implemented because new clause have no reference point	17.2.0
2021-06	RAN#92	RP-211097	2179		A	CR on introducing RRC based Active BWP Switch on multiple CCs in EN-DC FR2	17.2.0
2021-06	RAN#92	RP-211101	2182		A	Big CR: Introduction of Rel-16 CSI-RS based L3 measurement RRM performance requirements	17.2.0
2021-06	RAN#92	RP-211096	2184		A	Big CR: Introduction of Rel-16 NR Positioning RRM performance requirements and test cases	17.2.0
2021-06	RAN#92	RP-211121	2185		B	Big CR: RRM requirements for band n262 in 38.133	17.2.0
2021-09	RAN#93	RP-211902	2196		B	RRM requirements for FR2 FWA for band n259 in 38.133	17.3.0
2021-09	RAN#93	RP-211922	2199		A	Big CR to TS 38.133: NR_newRAT-Core maintenance (Rel-17)	17.3.0
2021-09	RAN#93	RP-211925	2202		A	Big CR to TS 38.133: NR_newRAT-Perf maintenance Part 1 (Rel-17)	17.3.0
2021-09	RAN#93	RP-211925	2205		F	Big CR to TS 38.133: NR_newRAT-Perf maintenance Part 2 (Rel-17)	17.3.0
2021-09	RAN#93	RP-211925	2208		F	Big CR to TS 38.133: NR_newRAT-Perf maintenance Part 3 (Rel-17)	17.3.0
2021-09	RAN#93	RP-211890	2210		A	Big CR to TS 38.133: NR_unlic maintenance Part 1 (Rel-17)	17.3.0
2021-09	RAN#93	RP-211890	2212		A	Big CR to TS 38.133: NR_unlic maintenance Part 2 (Rel-17)	17.3.0
2021-09	RAN#93	RP-211893	2214		F	Big CR to TS 38.133: NR_pos maintenance (Rel-17)	17.3.0
2021-09	RAN#93	RP-211891	2216		A	Big CR to TS 38.133: Rel-16 WIs RRM maintenance Part 1 (Rel-17)	17.3.0
2021-09	RAN#93	RP-211893	2218		F	Big CR to TS 38.133: Rel-16 WIs RRM maintenance Part 2 (Rel-17)	17.3.0
2021-12	RAN#94	RP-212833	2225		F	Missing RRM performance requirements for n259 FWA in Rel-17	17.4.0
2021-12	RAN#94	RP-212854	2239		A	Big CR to TS 38.133: NR_newRAT-Core maintenance (Rel-17)	17.4.0
2021-12	RAN#94	RP-212846	2242		F	Big CR to TS 38.133: NR_newRAT-Perf maintenance (Rel-17)	17.4.0
2021-12	RAN#94	RP-212847	2244		A	Big CR to TS 38.133: Rel-16 WIs RRM maintenance Part 1 (Rel-17)	17.4.0
2021-12	RAN#94	RP-212849	2246		A	Big CR to TS 38.133: Rel-16 WIs RRM maintenance Part 2 (Rel-17)	17.4.0
2021-12	RAN#94	RP-212847	2248		A	Big CR to TS 38.133: Rel-16 WIs RRM maintenance Part 3 (Rel-17)	17.4.0
2021-12	RAN#94	RP-212847	2250		A	Big CR to TS 38.133: Rel-16 WIs RRM maintenance Part 4 (Rel-17)	17.4.0
2022-03	RAN#95	RP-220365	2251		B	Big CRs : RRM requirements for Rel-17 NR SL enhancement	17.5.0
2022-03	RAN#95	RP-220364	2252	1	B	Big CR: RRM requirements for Rel-17 NR SL Relay	17.5.0
2022-03	RAN#95	RP-220342	2253	1	B	Big CR: RRM requirements for Rel-17 NR FR1 RF	17.5.0
2022-03	RAN#95	RP-220373	2258		B	Big CR to TS 38.133 on HST FR2 RRM Core Requirements	17.5.0
2022-03	RAN#95	RP-220372	2259		B	Big CR: RRM requirements for Rel-17 NR FR1 HST enhancements	17.5.0
2022-03	RAN#95	RP-220368	2260		B	Big CR: RRM requirements for Rel-17 NR FeRRM (TS 38.133)	17.5.0
2022-03	RAN#95	RP-220378	2261	1	B	Big CR: RRM requirements for Rel-17 NR MG enhancements	17.5.0
2022-03	RAN#95	RP-220366	2263		B	Big CR: RRM requirements Rel-17 NR UE Power Saving Enhancements	17.5.0
2022-03	RAN#95	RP-220362	2265		B	Big CR: RRM requirements for Rel-17 NR feMIMO	17.5.0
2022-03	RAN#95	RP-220379	2266		B	Big CR: RRM requirements for Rel-17 NR Positioning Enhancements	17.5.0
2022-03	RAN#95	RP-220346	2267		B	Big CR: RRM requirements for Rel-17 Further Multi-RAT Dual-Connectivity enhancements (TS 38.133)	17.5.0
2022-03	RAN#95	RP-220375	2268		B	Big CR: RRM requirements for Rel-17 Enhanced IIoT and URLLC support	17.5.0
2022-03	RAN#95	RP-220367	2269		B	Big CR: RRM requirements for Rel-17 NR SDT in INACTIVE state	17.5.0
2022-03	RAN#95	RP-220337	2272		A	Big CR to TS 38.133: NR_newRAT-Core maintenance (Rel-17)	17.5.0
2022-03	RAN#95	RP-220337	2275	1	F	Big CR to TS 38.133: NR_newRAT-Perf maintenance (Rel-17)	17.5.0
2022-03	RAN#95	RP-220334	2277		A	Big CR to TS 38.133: Rel-16 WIs RRM maintenance Part 1 (Rel-17)	17.5.0
2022-03	RAN#95	RP-220339	2279		A	Big CR to TS 38.133: Rel-16 WIs RRM maintenance Part 2 (Rel-17)	17.5.0
2022-03	RAN#95	RP-220339	2281		F	Big CR to TS 38.133: Rel-16 WIs RRM maintenance Part 3 (Rel-17)	17.5.0
2022-03	RAN#95	RP-220345	2282		B	Big CR: RRM requirements for Rel-17 NR MUSIM	17.5.0
2022-03	RAN#95	RP-220909	2284	1	B	Introduction of band n101	17.5.0
2022-06	RAN#96	RP-221681	2286	2	F	FR2 HST neighboring cell measurement requirement correction	17.6.0

2022-06	RAN#96	RP-221677	2288	1	F	SL enhancement core requirement correction	17.6.0
2022-06	RAN#96	RP-221681	2289		F	CR on SRS antenna port switching in TS38.133	17.6.0
2022-06	RAN#96	RP-221681	2290	1	F	CR on HO with PSCell for NE-DC to NE-DC in TS38.133 R17	17.6.0
2022-06	RAN#96	RP-221682	2293	1	F	Maintenance CR for SCG activation on 38.133 R17	17.6.0
2022-06	RAN#96	RP-221677	2294	1	F	Maintenance CR for RRM requirements for NR Uu and SL intra-band con-current operation	17.6.0
2022-06	RAN#96	RP-221681	2295	2	F	CR to TS 38.133 on UL Timing Adjustment	17.6.0
2022-06	RAN#96	RP-221681	2296		B	38.133 CR on introduction of SRS antenna port switching (resubmission)	17.6.0
2022-06	RAN#96	RP-221681	2301	1	F	Completing requirement of HO with PSCell	17.6.0
2022-06	RAN#96	RP-221677	2303	1	F	CR on PRS-RSRP measurement period without gaps	17.6.0
2022-06	RAN#96	RP-221677	2304	1	F	CR on PRS-RSRPP measurement period requirements	17.6.0
2022-06	RAN#96	RP-221677	2305	1	F	CR on the PRS and RRM measurement requirements in RRC_INACTIVE state	17.6.0
2022-06	RAN#96	RP-221682	2307		F	Maintenance CR on TS38.133 for L1 impact due to concurrent MG	17.6.0
2022-06	RAN#96	RP-221682	2308	1	F	Maintenance CR on TS38.133 for L1 impact due toNCSG	17.6.0
2022-06	RAN#96	RP-221682	2309	1	F	CR on TA validation for Rel-17 NR SDT in INACTIVE sate	17.6.0
2022-06	RAN#96	RP-221682	2315	1	F	CR to maintain concurrent measurement gap in TS 38.133	17.6.0
2022-06	RAN#96	RP-221682	2316	1	F	CR to maintain measurements with NCSG in TS 38.133	17.6.0
2022-06	RAN#96	RP-221682	2317		F	CR to maintain Selection Reselection of relay UE in TS 38.133	17.6.0
2022-06	RAN#96	RP-221681	2318	1	F	CR on PUCCH SCell activation and deactivation delay requirements	17.6.0
2022-06	RAN#96	RP-221677	2319		F	CR on known condition of unified TCI for UL	17.6.0
2022-06	RAN#96	RP-221677	2320	1	F	CR on measurement restriction and scheduling availability for inter cell L1-RSRP measurement	17.6.0
2022-06	RAN#96	RP-221680	2322		B	CR on RRM requirements for IBM inter-band FR2 UL CA	17.6.0
2022-06	RAN#96	RP-221682	2324	1	F	CR on concurrent measurement gaps	17.6.0
2022-06	RAN#96	RP-221682	2325		F	CR on inter-frequency measurement with NCSG	17.6.0
2022-06	RAN#96	RP-221681	2327	1	F	CR on enhanced requirements for SCell measurement for Rel-17 FR1 HST requirements	17.6.0
2022-06	RAN#96	RP-221682	2328	1	F	CR on Efficient activation/de-activation mechanism for Scells	17.6.0
2022-06	RAN#96	RP-221682	2329	1	F	CR on Efficient activation/de-activation mechanism for one SCG (section 8)	17.6.0
2022-06	RAN#96	RP-221682	2330	1	F	CR on Efficient activation/de-activation mechanism for one SCG (section 9)	17.6.0
2022-06	RAN#96	RP-221682	2331	1	F	CR for TCI state indication with direct SCell activation	17.6.0
2022-06	RAN#96	RP-221682	2332	1	F	CR for remaining aspects of concurrent measurement gaps (section 8)	17.6.0
2022-06	RAN#96	RP-221682	2333	1	F	CR for remaining aspects of concurrent measurement gaps (section 9)	17.6.0
2022-06	RAN#96	RP-221682	2334	1	F	CR to maintain SCG activation and deactivation delay requirements in TS 38.133	17.6.0
2022-06	RAN#96	RP-221677	2335	1	F	CR to 38.133 on positioning measurement requirements in RRC_INACTIVE state	17.6.0
2022-06	RAN#96	RP-221747	2336	2	F	CR 38.133 corrections on L1/L3 measurement requirements for deactivated SCG	17.6.0
2022-06	RAN#96	RP-221677	2337	1	F	CR to TS 38.133 Correction to sidelink core requirements	17.6.0
2022-06	RAN#96	RP-221682	2338	1	F	CR to TS 38.133 Correction to measurements requirements for PDC	17.6.0
2022-06	RAN#96	RP-221681	2339	1	F	CR to TS38.133 for the applicability of requirement for FR2 HST	17.6.0
2022-06	RAN#96	RP-221673	2343	1	B	CR to TS 38.133 - Introduction of licensed 6GHz band n104	17.6.0
2022-06	RAN#96	RP-221684	2344	1	B	CR to TS 38.133: RMR 900MHz band introduction	17.6.0
2022-06	RAN#96	RP-221680	2345		F	Correction on singaling name for FR1 HST	17.6.0
2022-06	RAN#96	RP-221682	2347	1	F	Draft CR on A-TRS based SCell activation and deactivated delay requirements with multiple downlink Scell	17.6.0
2022-06	RAN#96	RP-221682	2348		F	Correction on beam failure detection on deactived PSCell	17.6.0
2022-06	RAN#96	RP-221681	2351	1	F	CR on maintenance for PUCCH SCell activation	17.6.0
2022-06	RAN#96	RP-221677	2353	1	F	CR on maintaining RRM core requirements for R17 NR SL	17.6.0
2022-06	RAN#96	RP-221677	2356	1	F	DraftCR on maintaining L1-RSRP measurement requirements for R17 inter-cell beam managements	17.6.0

2022-06	RAN#96	RP-221677	2357	1	F	DraftCR on maintaining R17 TRP specific BFR requirements	17.6.0
2022-06	RAN#96	RP-221682	2358	1	F	CR on pre-MG related requirements	17.6.0
2022-06	RAN#96	RP-221682	2359	1	F	CR on collision handling for concurrent MGs	17.6.0
2022-06	RAN#96	RP-221682	2360	1	F	CR on maintenance of NCSG requirements	17.6.0
2022-06	RAN#96	RP-221677	2361	1	F	CR on measurement period requirements with multiple Rx TEGs	17.6.0
2022-06	RAN#96	RP-221677	2362	1	F	CR on requirements for UE Rx-Tx measurement with reduced latency	17.6.0
2022-06	RAN#96	RP-221677	2363	1	F	CR on RSTD measurement period requirements without gaps	17.6.0
2022-06	RAN#96	RP-221677	2365		F	CR on inter-frequency RRM requirements due to PRS measurement in INACTIVE	17.6.0
2022-06	RAN#96	RP-221677	2366		F	CR to introduce per-FR MG for PRS measurement	17.6.0
2022-06	RAN#96	RP-221677	2367	1	F	CR on scheduling restriction for PRS-RSRPP measurement	17.6.0
2022-06	RAN#96	RP-221682	2369	1	F	CR on SDT RRM requirements	17.6.0
2022-06	RAN#96	RP-221654	2370	1	B	CR on mapping table for NR TADV [NRTADV]	17.6.0
2022-06	RAN#96	RP-221682	2371		B	CR update SDT RRM core requirements	17.6.0
2022-06	RAN#96	RP-221681	2373		F	CR on FR2 HST core requirements	17.6.0
2022-06	RAN#96	RP-221682	2374	1	F	CR on core requirements for UE power saving enhancement	17.6.0
2022-06	RAN#96	RP-221682	2375	1	F	CR on New gap pattern for MUSIM	17.6.0
2022-06	RAN#96	RP-221681	2379	1	F	CR on R17 core requirements for HO with PSCell	17.6.0
2022-06	RAN#96	RP-221677	2381	1	F	CR on unified TCI in R17 feMIMO	17.6.0
2022-06	RAN#96	RP-221677	2382	1	F	CR on L1-RSRP measurement requirements for inter-cell BM in R17	17.6.0
2022-06	RAN#96	RP-221681	2383		B	CR to TS 38.133: intra-frequency measurements with gaps for for FR2 NR HST	17.6.0
2022-06	RAN#96	RP-221681	2384	1	B	CR to TS 38.133: SSB-based L1-SINR measurements for FR2 NR HST	17.6.0
2022-06	RAN#96	RP-221682	2386	1	F	CR on TS38.133 for applicability of RLM measurement relaxation	17.6.0
2022-06	RAN#96	RP-221682	2389	1	F	Changes to SDT requirements	17.6.0
2022-06	RAN#96	RP-221676	2390		B	Big CR for RedCap for TS 38.133	17.6.0
2022-06	RAN#96	RP-221681	2393	1	F	CR on requirements for HO with PSCell when PSCell is on CCA in NR SA to EN-DC scenario	17.6.0
2022-06	RAN#96	RP-221681	2394	1	F	CR on SCell activation/deactivation with PUCCH	17.6.0
2022-06	RAN#96	RP-221677	2397	1	F	CR on TRP specific CBD and BFR requirements	17.6.0
2022-06	RAN#96	RP-221682	2398	1	F	Correction to Pre-MG requirements in TS 38.133	17.6.0
2022-06	RAN#96	RP-221682	2399	1	F	Correction to NCSG requirements in TS 38.133	17.6.0
2022-06	RAN#96	RP-221677	2400	1	F	Correction to PRS measurement requirements in RRC inactive state	17.6.0
2022-06	RAN#96	RP-221655	2406		F	Big CR for TS 38.133 Core Maintenance Part-2 (Rel-17)	17.6.0
2022-06	RAN#96	RP-221655	2409		A	Big CR for TS 38.133 Core Maintenance Part-2 (Rel-17)	17.6.0
2022-06	RAN#96	RP-221660	2412		F	Big CR for TS 38.133 Perf Maintenance Part-1 (Rel-17)	17.6.0
2022-06	RAN#96	RP-221660	2415		F	Big CR for TS 38.133 Perf Maintenance Part-2 (Rel-17)	17.6.0
2022-06	RAN#96	RP-221676	2416		B	Big CR on extending NR to 71GHz for TS38.133	17.6.0
2022-06	RAN#96	RP-221661	2417		B	Big CR on RRM requirements for FR2 RF enhancement	17.6.0
2022-06	RAN#96	RP-221682	2418		B	Big CR on RRM requirements for NTN	17.6.0
2022-09	RA|N#97	RP-222031	2419	2	F	CR: FR2 HST Scheduling restriction on SSB	17.7.0
2022-09	RA|N#97	RP-222032	2420	1	F	CR: Power Saving Multiple RS Handling Clarification	17.7.0
2022-09	RA|N#97	RP-222034	2421	1	F	Completing PUCCH SCell activation requirement	17.7.0
2022-09	RA|N#97	RP-222043	2422		B	Big CR for test cases of Rel-17 FeRRM - PUCCH SCell activation (Rel-17)	17.7.0
2022-09	RA|N#97	RP-222031	2423	2	F	CR on RRM core requirements for measurement procedure requirements for HST FR2	17.7.0
2022-09	RA|N#97	RP-222035	2424	1	F	CR on NCSG core requirements maintenance	17.7.0
2022-09	RA|N#97	RP-222032	2425	1	F	CR on PRS measurement period requirements	17.7.0
2022-09	RA|N#97	RP-222032	2426	1	F	CR on PRS measurement period requirements in RRC_INACTIVE state	17.7.0
2022-09	RA|N#97	RP-222050	2430		F	TS38.133 CR on SCG activation/deactivation	17.7.0
2022-09	RAN#97	RP-222035	2431	1	F	CR on measurement requirements for FR1 HST	17.7.0
2022-09	RA|N#97	RP-222043	2433	1	B	CR on test case for Handover with PSCell from NR SA to EN-DC with sequential processing	17.7.0
2022-09	RA|N#97	RP-222035	2434		B	CR on active TCI state switching delay	17.7.0
2022-09	RA|N#97	RP-222049	2447	1	B	CR on TC for Selection_Reselection of sidelink relay UE	17.7.0
2022-09	RA|N#97	RP-222035	2448	1	F	Maintenance CR on TS38.133 for Pre-MG core part	17.7.0

2022-09	RA|N#97	RP-222035	2449	1	F	Maintenance CR on TS38.133 for concurrent gaps core part	17.7.0
2022-09	RA|N#97	RP-222035	2450	1	F	Maintenance CR on TS38.133 for NCSG core part	17.7.0
2022-09	RA|N#97	RP-222050	2453		F	Interruptions due to RRM measurements on deactivated SCG	17.7.0
2022-09	RA|N#97	RP-222050	2454	1	F	CR on T1 definition of TA validation for Rel-17 NR SDT in INACTIVE sate	17.7.0
2022-09	RAN#97	RP-222053	2455		B	Big CR for SL enhancement RRM test cases	17.7.0
2022-09	RAN#97	RP-222035	2456		F	CR on Abbreviations for NTN	17.7.0
2022-09	RA|N#97	RP-222051	2457	1	F	CR on QCL-ed assumption for RSSI measurement in FR2-2	17.7.0
2022-09	RA|N#97	RP-222034	2460	1	F	38133CR on SRS antenna switching in MR-DC	17.7.0
2022-09	RA|N#97	RP-222034	2461	1	F	38133CR on PUCCH SCell activation delay	17.7.0
2022-09	RA|N#97	RP-222032	2463	1	F	CR on carrier-specific scaling factor for RedCap (9.1A.5)	17.7.0
2022-09	RA|N#97	RP-222051	2464	1	B	CR on Intra-frequency measurement requirements with CCA in FR2-2	17.7.0
2022-09	RA|N#97	RP-222032	2467	1	B	CR on applicability of requirements for RedCap Ues	17.7.0
2022-09	RA|N#97	RP-222035	2468		F	CR on TS38.133 NR NTN RRM requirements	17.7.0
2022-09	RA|N#97	RP-222051	2469	1	B	CR on TS38.133 RRM requirements in FR2-2	17.7.0
2022-09	RAN#97	RP-222032	2470	1	F	Maintenance CR for Rel-17 SL on 38.133	17.7.0
2022-09	RAN#97	RP-222035	2471		F	Maintenance CR for Rel-17 HST in FR1 on 38.133	17.7.0
2022-09	RA|N#97	RP-222050	2472	1	F	Maintenance CR for fast scell activation on 38.133 R17	17.7.0
2022-09	RA|N#97	RP-222050	2473	1	F	Maintenance CR for SCG activation on 38.133 R17	17.7.0
2022-09	RA|N#97	RP-222036	2474		F	CR on scheduling availability for inter cell beam management	17.7.0
2022-09	RA|N#97	RP-222036	2476	1	F	CR on unified TCI in R17 feMIMO	17.7.0
2022-09	RA|N#97	RP-222036	2477	1	F	CR on inter-cell beam managements in R17 feMIMO	17.7.0
2022-09	RA|N#97	RP-222032	2479	1	F	draftCR on RedCap RLM	17.7.0
2022-09	RA|N#97	RP-222032	2480	1	F	CR on RedCap measurement	17.7.0
2022-09	RA|N#97	RP-222035	2484	1	F	CR to TS 38.133: Corrections to cell re-selection for NR UE for satellite access	17.7.0
2022-09	RA|N#97	RP-222028	2486		F	CR on Number of serving carriers in SA	17.7.0
2022-09	RA|N#97	RP-222042	2487		B	CR for testcase of UE UL carrier RRC reconfiguration in FR2	17.7.0
2022-09	RA|N#97	RP-222035	2488	1	F	CR to TS 38.133: Corrections to UE transmit timing and timing advance for satellite access	17.7.0
2022-09	RA|N#97	RP-222035	2489	1	F	CR for concurrent measurement gaps	17.7.0
2022-09	RA|N#97	RP-222035	2490		F	CR for remaining aspects of NCSG measurement gaps (section 8 and 9)	17.7.0
2022-09	RA|N#97	RP-222050	2493	1	F	CR on Efficient activation/de-activation mechanism for one SCG	17.7.0
2022-09	RA|N#97	RP-222048	2494	1	F	DraftCR TC#13 PSCell activation and deactivation delay	17.7.0
2022-09	RA|N#97	RP-222034	2496		F	CR on SRS antenna port switching requirements 36.133 NOTE This CR is not implemented due to being a CR number for 38.133 but the spec is 36.133	17.7.0
2022-09	RA|N#97	RP-222042	2498	1	B	Test case for R17 Tx switching enhancement	17.7.0
2022-09	RA|N#97	RP-222050	2500	1	F	Correction on efficient activation for one SCG	17.7.0
2022-09	RAN#97	RP-222032	2501	1	F	Correction on Ranking for 1RX RedCap UE	17.7.0
2022-09	RAN#97	RP-222032	2502	1	F	Correction on Trs definition for RedCap UE	17.7.0
2022-09	RA|N#97	RP-222032	2503		F	Clarification on SSB in RLM and BFD for RedCap UE	17.7.0
2022-09	RA|N#97	RP-222032	2505	1	F	Correction on measurement with eDRX for RedCap UE	17.7.0
2022-09	RA|N#97	RP-222032	2506	1	F	CR on higher priority inter-frequency measurement relaxation for RedCap	17.7.0
2022-09	RA|N#97	RP-222032	2507	1	F	Corrections on measurement relaxations mixed with eDRX for Redcap UE	17.7.0
2022-09	RA|N#97	RP-222035	2508		F	CR on the enhancement for inter-frequency measurement in idle mode for HST	17.7.0
2022-09	RA|N#97	RP-222050	2509	1	F	CR on SCG activation delay and intra-frequency measurement	17.7.0
2022-09	RA|N#97	RP-222051	2510	1	B	CR on introduction of cell Re-selection, inter-frequency and intra-frequency measurments requirements for FR2-2	17.7.0
2022-09	RA|N#97	RP-222035	2512	1	F	Corrections to Pre-configured MG	17.7.0
2022-09	RA|N#97	RP-222035	2513		F	Corrections to deriveSSB-IndexFromCellInter parameter naming	17.7.0
2022-09	RA|N#97	RP-222036	2514		F	CR to TS38.133 Corrections on R17 unified TCI state switching requirement	17.7.0
2022-09	RA|N#97	RP-222032	2517	1	F	CR to 38.133 scheduling restriction when PRS has lower priority than other DL signals/CCs	17.7.0
2022-09	RA|N#97	RP-222032	2518	1	F	CR to 38.133 clarification on measurement period requirement in RRC_INACTIVE state	17.7.0
2022-09	RA|N#97	RP-222032	2522	1	F	Changes to SDT requirements for NR RedCap	17.7.0
2022-09	RA|N#97	RP-222035	2524	1	F	CR on UE transmit timing requirements for NTN	17.7.0
2022-09	RA|N#97	RP-222032	2525	1	F	CR on maintaining RLM/BFD relaxation requirements	17.7.0
2022-09	RA|N#97	RP-222032	2526	1	F	CR on maintaining RRM core requirements for R17 NR SL	17.7.0
2022-09	RA|N#97	RP-222036	2527	1	F	CR on maintaining TCI state switching requirements for R17 unified TCI	17.7.0
2022-09	RA|N#97	RP-222036	2529	1	F	CR on maintaining R17 TRP specific BFR requirements	17.7.0
2022-09	RAN#97	RP-222035	2530	1	F	CR on pre-MG related requirements	17.7.0
2022-09	RAN#97	RP-222035	2531	1	F	CR on concurrent MG related requirements	17.7.0
2022-09	RA|N#97	RP-222035	2532	1	F	CR on maintenance of NCSG requirements	17.7.0
2022-09	RA|N#97	RP-222035	2533	1	F	CR on on other RRM requirements for NTN	17.7.0
2022-09	RA|N#97	RP-222035	2534	1	F	CR on intra-frequency measurement requirements for NTN	17.7.0

2022-09	RA|N#97	RP-222035	2535	1	F	CR on cell reselection requirements for NTN	17.7.0
2022-09	RA|N#97	RP-222032	2536	1	F	CR on measurement period requirements with multiple Rx TEGs	17.7.0
2022-09	RA|N#97	RP-222032	2538	1	F	CR on applicability of measurement requirements with POS MG	17.7.0
2022-09	RA|N#97	RP-222032	2539	1	F	CR on PRS measurement requirements in INACTIVE	17.7.0
2022-09	RA|N#97	RP-222036	2543	1	F	CR on requirements for UE Rx-Tx measurement for PDC	17.7.0
2022-09	RA|N#97	RP-222050	2544	1	F	CR on SDT RRM requirements	17.7.0
2022-09	RA|N#97	RP-222032	2545	1	F	CR on TS38.133 for applicability of RLM measurement relaxation	17.7.0
2022-09	RA|N#97	RP-222032	2546	1	F	CR on RedCap maintenance in TS 38.133	17.7.0
2022-09	RA|N#97	RP-222036	2547		F	CR on reporting mapping for URLLC in TS 38.133	17.7.0
2022-09	RA|N#97	RP-222036	2548		F	Formal CR to 38.133: Corrections on MUSIM gaps	17.7.0
2022-09	RA|N#97	RP-222032	2549	1	F	CR to 38.133 clarification on measurement period requirements in RRC_CONNECTED state	17.7.0
2022-09	RA|N#97	RP-222050	2553	1	F	Formal CR on Rel-17 SCG activation requirements	17.7.0
2022-09	RA|N#97	RP-222036	2557	1	F	CR on unified TCI state switching requirements	17.7.0
2022-09	RA|N#97	RP-222036	2558	1	F	Maintenance CR on inter-cell beam management	17.7.0
2022-09	RAN#97	RP-222036	2559		F	CR on corrections for TRP specific BFR	17.7.0
2022-09	RAN#97	RP-222034	2560	1	F	CR on correction of fine timing for HO with PSCell when PSCell is on CCA in NR SA to EN-DC scenario	17.7.0
2022-09	RA|N#97	RP-222035	2563	1	F	Correction to NCSG core requirements	17.7.0
2022-09	RA|N#97	RP-222035	2564		F	Satellite access band grouping for RRM requirements in TS 38.133	17.7.0
2022-09	RA|N#97	RP-222055	2565		B	Big CR for NR positioning enh RRM (Rel-17)	17.7.0
2022-09	RA|N#97	RP-222049	2566		B	BigCR for R17 NR_SL_relay tests	17.7.0
2022-09	RA|N#97	RP-222032	2567		F	CR for RRM relaxation on R16 not at cell edge and R17 stationary for idle and inactive state mobility for Redcap	17.7.0
2022-09	RA|N#97	RP-222023	2570		F	Big CR for 38.133 maintenance part1 (Rel-17)	17.7.0
2022-09	RA|N#97	RP-222558	2572	1	F	Big CR for 38.133 maintenance part2 (Rel-17)	17.7.0
2022-09	RA|N#97	RP-222041	2573		B	Big CR for NR HST FR1 (Rel-17)	17.7.0
2022-09	RA|N#97	RP-222041	2574		B	Big CR for NR HST FR2 (Rel-17)	17.7.0
2022-09	RA|N#97	RP-222043	2575		B	Big CR for test cases of Rel-17 FeRRM - SRS antenna port switching (Rel-17)	17.7.0
2022-09	RA|N#97	RP-222043	2576	1	B	Big CR for test cases of Rel-17 FeRRM - HO with PSCell (Rel-17)	17.7.0
2022-09	RA|N#97	RP-222043	2577		B	Big CR for NR MG enh (Rel-17)	17.7.0
2022-09	RA|N#97	RP-222046	2578		B	Big CR for NR NTN solutions RRM (Rel-17)	17.7.0
2022-09	RA|N#97	RP-222047	2579		B	Big CR for NR UE power saving enh (Rel-17)	17.7.0
2022-09	RA|N#97	RP-222051	2580		B	Big CR for NR extending to 71GHz RRM (Rel-17)	17.7.0
2022-09	RA|N#97	RP-222052	2581		B	Big CR for NR feMIMO RRM (Rel-17)	17.7.0
2022-09	RA|N#97	RP-222056	2582		B	Big CR for NR RedCap RRM (Rel-17)	17.7.0
2022-09	RAN#97	RP-222048	2583		B	Big CR for MR-DC enh RRM (Rel-17)	17.7.0
2022-09	RAN#97	RP-222045	2584		F	Big CR for NR IIoT and URLLC enh (Rel-17)	17.7.0
2022-09	RAN#97	RP-222541	2586	2	F	Changes Idle mode requirements for NR RedCap	17.7.0
2022-12	RAN#98-e	RP-223306	2593	1	F	CR on correction to cell re-selection requirement for satellite access	17.8.0
2022-12	RAN#98-e	RP-223306	2594	1	F	CR on scheduling restrictions for L3 measurements in FR1 for NTN	17.8.0
2022-12	RAN#98-e	RP-223307	2597	1	F	CR on scheduling restrictions for L3 measurements in FR1 for RedCap	17.8.0
2022-12	RAN#98-e	RP-223306	2598	1	F	CR on intra-frequency and inter-frequency measurement requirement without MG for NTN	17.8.0
2022-12	RAN#98-e	RP-223306	2600		F	Correction on requirements for TRP specific link recovery procedures	17.8.0
2022-12	RAN#98-e	RP-223306	2603		F	CR on applicability of R17 inter cell beam management for FR2-2	17.8.0
2022-12	RAN#98-e	RP-223306	2604	1	F	CR on cell re-selection, MDT and timing requirements for NTN	17.8.0
2022-12	RAN#98-e	RP-223307	2612		F	CR on RLM requirements for FR2-2	17.8.0
2022-12	RAN#98-e	RP-223307	2613	1	F	CR on SCell activation requirements of FR2-2	17.8.0
2022-12	RAN#98-e	RP-223307	2614	1	F	CR on LBT assumption for FR2-2	17.8.0
2022-12	RAN#98-e	RP-223307	2615	1	F	CR on RSSI measurement for FR2-2	17.8.0
2022-12	RAN#98-e	RP-223307	2618	1	F	Correction to idle measurement requirements for RedCap Ues	17.8.0
2022-12	RAN#98-e	RP-223307	2620	1	F	Clarification on measurement for inactive mode RedCap UE	17.8.0
2022-12	RAN#98-e	RP-223307	2621	1	F	Correction on relaxed measurement for RedCap	17.8.0
2022-12	RAN#98-e	RP-223306	2623	1	F	CR on UL spatial relation switch requirements for NTN	17.8.0
2022-12	RAN#98-e	RP-223306	2624	1	F	CR on RLM and BFR requirements for NTN	17.8.0
2022-12	RAN#98-e	RP-223306	2625	1	F	CR on MG requirements for NTN	17.8.0
2022-12	RAN#98-e	RP-223306	2627	1	F	CR on SDT RRM requirements	17.8.0
2022-12	RAN#98-e	RP-223306	2630	1	B	Requirements for DRX case	17.8.0
2022-12	RAN#98-e	RP-223307	2631		F	CR on RedCap eDRX	17.8.0
2022-12	RAN#98-e	RP-223306	2634	1	F	CR for Cell Reselection requirements with distance trigger	17.8.0
2022-12	RAN#98-e	RP-223306	2636	1	F	CR on SFN based RLM and LRP	17.8.0
2022-12	RAN#98-e	RP-223306	2641	1	D	Editorial CR To TS 38.133 Handover requirements	17.8.0
2022-12	RAN#98-e	RP-223307	2644	1	F	Changes to RRC_IDLE mode requirements for RedCap for TS 38.133	17.8.0
2022-12	RAN#98-e	RP-223306	2647	1	F	Maintenance CR on inter-cell BM	17.8.0
2022-12	RAN#98-e	RP-223303	2652		B	Big CR for NTN RRM performance requirements	17.8.0
2022-12	RAN#98-e	RP-223302	2655		B	Big CR for NR IIoT and URLLC enh performance requirements	17.8.0

2022-12	RAN#98-e	RP-223304	2656		B	Big CR for NR SDT performance requirements	17.8.0
2022-12	RAN#98-e	RP-223311	2625	3	F	CR on MG requirements for NTN	17.8.0
2022-12	RAN#98-e	RP-223311	2630	2	B	Requirements for DRX case	17.8.0
2022-12	RAN#98-e	RP-223299	2653	1	B	Big CR for NR operation to 71GHz RRM performance requirements Note: Partially implemented; some clauses had no revision marks and no changes were implemented on these clauses	17.8.0
2022-12	RAN#98-e	RP-223297	2661		A	CR to TS 38.133: Corrections to NR positioning and high speed train test cases (Rel 17)	17.8.0
2022-12	RAN#98-e	RP-223290	2664		A	CR on NR RRM maintenance R17	17.8.0
2022-12	RAN#98-e	RP-223309	2665	1	F	CR on CG-SDT with RedCap eDRX R17	17.8.0
2022-12	RAN#98-e	RP-223310	2666	1	F	CR on NCSG test case	17.8.0
2022-12	RAN#98-e	RP-223310	2667	1	F	CR on R17 HST test case - SA event triggered reporting tests without gap under DRX for UE configured with highSpeedMeasCA-Scell-r17	17.8.0
2022-12	RAN#98-e	RP-223308	2669		F	CR on removing the redundancy from TS 38.133 in response to RAN2 LS	17.8.0
2022-12	RAN#98-e	RP-223290	2671		A	Editorial CR on scheduling restrictions for L3 measurements in FR2 (Rel-17)	17.8.0
2022-12	RAN#98-e	RP-223309	2672	1	F	CR for Unified TCI State switching requirements	17.8.0
2022-12	RAN#98-e	RP-223309	2673	1	F	CR for Inter-cell Beam Management	17.8.0
2022-12	RAN#98-e	RP-223292	2676		A	CR to CSI-RS, RLM and BWP switching in annex	17.8.0
2022-12	RAN#98-e	RP-223292	2679		A	Update on Scell activation and deactivation and Control Channel RMC for RLM FR2 (Rel-17)	17.8.0
2022-12	RAN#98-e	RP-223292	2682		A	Update to L1-RSRP test scenarios (Rel-17)	17.8.0
2022-12	RAN#98-e	RP-223298	2683	1	F	CR on Tidentify_inter_without_index when deriveSSB-IndexFromCellInter is configured	17.8.0
2022-12	RAN#98-e	RP-223297	2686		A	Modification on TS38.133 for Rel-16	17.8.0
2022-12	RAN#98-e	RP-223297	2691		A	CR on positioning measurement accuracy requirements in R16	17.8.0
2022-12	RAN#98-e	RP-223292	2695		A	R17 Cat-A CR testcase correction from R15 TS 38.133	17.8.0
2022-12	RAN#98-e	RP-223292	2697		A	R17 Cat-A CR testcase correction from R16 TS 38.133	17.8.0
2022-12	RAN#98-e	RP-223309	2699	1	F	CR on QCL-ed assumption for inter-frequency RSSI measurement in FR2-2	17.8.0
2022-12	RAN#98-e	RP-223292	2702		A	CR on test case correction for timing advance	17.8.0
2022-12	RAN#98-e	RP-223296	2705		A	38133 Cat. A CR on SRS configuration for SRS carrier based switching	17.8.0
2022-12	RAN#98-e	RP-223310	2708	1	F	CR on TC for R17 HST CA enhancement on deactivated SCell (EN-DC) in FR1	17.8.0
2022-12	RAN#98-e	RP-223292	2711		A	CR on TC for known PSCell addition in R17	17.8.0
2022-12	RAN#98-e	RP-223292	2714		A	CR on TC for inter-RAT NR Cell reselection in R17	17.8.0
2022-12	RAN#98-e	RP-223311	2715	2	F	CR to TS 38.133 Correction to measurements core requirements for PDC	17.8.0
2022-12	RAN#98-e	RP-223308	2720		F	CR to TS 38.133 Correction to conditional PSCell addition requirements(Rel-17)	17.8.0
2022-12	RAN#98-e	RP-223308	2721	1	F	CR on RLM/BFD requirement for deactivated PSCell and SCG Activation Delay requirement	17.8.0
2022-12	RAN#98-e	RP-223309	2723	1	F	CR on corrections to RedCap Core requirements	17.8.0
2022-12	RAN#98-e	RP-223311	2725		F	CR on intra-frequency cell reselection in NTN	17.8.0
2022-12	RAN#98-e	RP-223311	2726		F	CR on intra-frequency measurements in NTN	17.8.0
2022-12	RAN#98-e	RP-223310	2727		B	Big CR for NR feMIMO RRM performance requirements	17.8.0
2022-12	RAN#98-e	RP-223302	2730		B	BigCR to 38.133: measurement accuracy requirements for RTT-based PDC	17.8.0
2022-12	RAN#98-e	RP-223311	2731	1	F	CR on correction to CHO requirement for satellite access	17.8.0
2022-12	RAN#98-e	RP-223311	2732	1	F	CR on correction to cell re-selection requirement for satellite access	17.8.0
2022-12	RAN#98-e	RP-223296	2734		A	Correction of L1 L3 measurenent measurement sharing factors for inter-frequency L3 measurement performed outside gaps in R17	17.8.0
2022-12	RAN#98-e	RP-223310	2735	1	F	L1-SINR and SS-SINR measurement accuracy requirements in R17 FR1 HST	17.8.0
2022-12	RAN#98-e	RP-223309	2737	2	F	CR on R17 feMIMO RRM requirements	17.8.0
2022-12	RAN#98-e	RP-223309	2739		F	CR on cell reselection requirements for FR2-2	17.8.0
2022-12	RAN#98-e	RP-223309	2741	1	F	CR on maintaining RRM requirements for R17 FeMIMO	17.8.0
2022-12	RAN#98-e	RP-223309	2746		F	Correction on measurement requirements for RedCap UE	17.8.0
2022-12	RAN#98-e	RP-223293	2749		A	Correction on Aperiodic CSI-RS RMCs and RLM in-sync test cases for R17	17.8.0
2022-12	RAN#98-e	RP-223311	2750	1	F	Corrections to Rel.17 positioning test cases	17.8.0
2022-12	RAN#98-e	RP-223311	2754		F	CR on Clarification of Ttrigger Requirements for Cell Reselection	17.8.0
2022-12	RAN#98-e	RP-223297	2757		A	CR on positioning requirements R17	17.8.0
2022-12	RAN#98-e	RP-223311	2758	1	F	CR on core requirements for Rel-17 positioning	17.8.0
2022-12	RAN#98-e	RP-223311	2759	1	F	CR on performance requirements for Rel-17 positioning	17.8.0
2022-12	RAN#98-e	RP-223311	2760	1	F	CR on RRC re-establishment requirements for NTN	17.8.0
2022-12	RAN#98-e	RP-223311	2762	1	F	CR on L1-RSRP measurement requirements	17.8.0
2022-12	RAN#98-e	RP-223309	2764	1	F	CR on conditions for PL-RS maintenance	17.8.0
2022-12	RAN#98-e	RP-223310	2765	2	F	CR to 38.133 on Rel-17 HST FR2 RRM Requirements	17.8.0

2022-12	RAN#98-e	RP-223311	2766	1	F	CR - Corrections to core requirements for NR positioning	17.8.0
2022-12	RAN#98-e	RP-223310	2767		F	Pre-MG test case No 1-1	17.8.0
2022-12	RAN#98-e	RP-223311	2768	2	F	Performance requirements for PRS Measurement with reduced number of samples	17.8.0
2022-12	RAN#98-e	RP-223311	2769	1	F	CR on R17 positioning measurement accuracy requirements	17.8.0
2022-12	RAN#98-e	RP-223301	2770		B	Big CR for Performance part of RedCap - TS 38.133	17.8.0
2022-12	RAN#98-e	RP-223308	2772		A	Correction to Idle Mode CA/DC Measurement Tests in TS 38.133	17.8.0
2022-12	RAN#98-e	RP-223308	2776	1	F	Formal CR to 38.133 Corrections on Handover with PSCell from NR SA to EN-DC with PSCell using CCA	17.8.0
2022-12	RAN#98-e	RP-223309	2777		F	CR on RedCap maintenance in TS 38.133	17.8.0
2022-12	RAN#98-e	RP-223297	2779		A	CR on Rel-17 measurements and UE specific CBW switch maintenance	17.8.0
2022-12	RAN#98-e	RP-223308	2780	1	F	Maintenance CR on SCell activation/deactivation with PUCCH	17.8.0
2022-12	RAN#98-e	RP-223309	2784	1	B	CR on measurement procedures for RedCap UEs	17.8.0
2022-12	RAN#98-e	RP-223309	2785	1	F	CR on timing requirements with measurement gaps for RedCap UEs	17.8.0
2022-12	RAN#98-e	RP-223309	2786	1	B	CR on RRC Connection mobility control	17.8.0
2022-12	RAN#98-e	RP-223309	2787	1	B	CR on Measurement Procedures	17.8.0
2022-12	RAN#98-e	RP-223298	2788		F	CR to TS 38.133: Remedy the incorrect implementation in the section 4.2.2.4	17.8.0
2022-12	RAN#98-e	RP-223303	2789		B	Big CR for NR NTN RRM performance requirements	17.8.0
2022-12	RAN#98-e	RP-223304	2790		B	Big CR for NR small data transmissions in INACTIVE state RRM performance requirements	17.8.0
2023-03	RAN#99	RP-230514	2791	1	F	CR on R17 feMIMO for scheduling restriction in inter cell beam management in R17	17.9.0
2023-03	RAN#99	RP-230504	2795		A	CR on TC for FR2 inter-frequency relative accuracy in R17	17.9.0
2023-03	RAN#99	RP-230504	2799		A	CR on TC for known PSCell addition in R17	17.9.0
2023-03	RAN#99	RP-230504	2803		A	CR to SNR on RLM-RS2 for FR2 CSI-RS based RLM OOS/IS tests	17.9.0
2023-03	RAN#99	RP-230506	2807		A	CR to SNR of q0 level for BFD and LR in FR2	17.9.0
2023-03	RAN#99	RP-230504	2811		A	CR to ConfigNo of SSB Configuration and CSI-RS for tracking in redirection test	17.9.0
2023-03	RAN#99	RP-230514	2816		F	CR for Unified TCI State switching requirements	17.9.0
2023-03	RAN#99	RP-230514	2817		F	CR on L3-RSSI measurement for NR up to 71GHz	17.9.0
2023-03	RAN#99	RP-230518	2821	1	F	CR on NR RedCap measurement requirement in IDLE mode with eDRX R17	17.9.0
2023-03	RAN#99	RP-230516	2824		F	CR on SMTC collision	17.9.0
2023-03	RAN#99	RP-230505	2827		A	R17 Cat-A CR CLI measurement testcase correction	17.9.0
2023-03	RAN#99	RP-230505	2830		A	R17 Cat-A CR SA NR-LTE HO testcase correction	17.9.0
2023-03	RAN#99	RP-230514	2834		F	CR for Unified TCI State switching requirements for UL	17.9.0
2023-03	RAN#99	RP-230518	2836	1	F	CR on CG-SDT test cases for RedCap UEs	17.9.0
2023-03	RAN#99	RP-230519	2838	1	F	CR correction of SDT test cases	17.9.0
2023-03	RAN#99	RP-230517	2840	1	F	CR on requirements applicability of PRS measurement	17.9.0
2023-03	RAN#99	RP-230507	2842	1	F	CR on PUCCH SCell activation requirement	17.9.0
2023-03	RAN#99	RP-230516	2844	1	F	CR on clarification for UE acquiring system information during handover	17.9.0
2023-03	RAN#99	RP-230517	2846	1	F	CR on the applicability of timing error margin in positioning accuracy requirements	17.9.0
2023-03	RAN#99	RP-230506	2849		A	CR on positioning test case in R16	17.9.0
2023-03	RAN#99	RP-230519	2853	1	F	CR on FR2 PSCell SSB-based BFD and CBD test maintenance for UE fulfilling relaxed measurement criterion	17.9.0
2023-03	RAN#99	RP-230499	2858		A	Sidelinek R16 resource selection test configuration correction R17 mirror	17.9.0
2023-03	RAN#99	RP-230519	2860		F	Sidelinek R17 resource selection test configuration correction	17.9.0
2023-03	RAN#99	RP-230514	2865		A	FR1 HST L1-RSRP test configuration correction R17 mirror	17.9.0
2023-03	RAN#99	RP-230509	2867	1	F	CR on scheduling restriction when deriveSSB-IndexFromCellInter is configured	17.9.0
2023-03	RAN#99	RP-230516	2869	1	F	Maintenance CR on cell reselection requirements for satellite access	17.9.0
2023-03	RAN#99	RP-230512	2870	1	F	CR for R17 MR-DC Enh on 38.133	17.9.0
2023-03	RAN#99	RP-230519	2874	1	F	CR on test case for R17 SL in SL-DRX mode	17.9.0
2023-03	RAN#99	RP-230500	2877		A	Correction on TCs for direct scell activation in R17(Cat-A)	17.9.0
2023-03	RAN#99	RP-230514	2879	1	F	CR on RRM core requirements of FeMIMO	17.9.0
2023-03	RAN#99	RP-230516	2881	1	F	Maintenance core part CR on of MG enh R17	17.9.0
2023-03	RAN#99	RP-230516	2883	1	F	Maintenance perf part CR on of MG enh R17	17.9.0
2023-03	RAN#99	RP-230516	2888		F	CR on editorial change for CSI-RS based intra-frequency measurements	17.9.0
2023-03	RAN#99	RP-230515	2895	1	F	CR to 38.133 on Rel-17 HST FR2 RRM and Measurement Accuracy	17.9.0
2023-03	RAN#99	RP-230516	2898	1	F	CR to38.133: Complement the assistance information for NTN neighbour cell measurement	17.9.0
2023-03	RAN#99	RP-230514	2900		F	CR on applicability of requirements for measurement restriction	17.9.0
2023-03	RAN#99	RP-230515	2901		F	CR on R17 HST FR2 test case of SSB based L1-RSRP measurement	17.9.0

2023-03	RAN#99	RP-230516	2902	1	F	CR on R17 Measurement Gap enhancement	17.9.0
2023-03	RAN#99	RP-230507	2907		F	Correction on SRS configurations for SRS antenna switching test cases in R17	17.9.0
2023-03	RAN#99	RP-230507	2910		A	CR on TC maintenance for NR-U R17	17.9.0
2023-03	RAN#99	RP-230510	2914		F	CR on CCA model for FR2-2 R17	17.9.0
2023-03	RAN#99	RP-230510	2916		F	CR on test case maintenance for FR2-2 R17	17.9.0
2023-03	RAN#99	RP-230518	2922		F	Correction on measurement requirements with eDRX for RedCap UE R17	17.9.0
2023-03	RAN#99	RP-230518	2924	1	F	Correction on measurement requirement in idle mode and connected mode for RedCap UE	17.9.0
2023-03	RAN#99	RP-230518	2926		F	Correction to FR2 RedCap test cases_R17	17.9.0
2023-03	RAN#99	RP-230518	2928	1	F	Correction to RedCap RMCs and FR1 RedCap test cases_R17	17.9.0
2023-03	RAN#99	RP-230519	2932	1	F	Adding relaxation factor on measurement relaxation requirements R17	17.9.0
2023-03	RAN#99	RP-230506	2935		A	PRS measurement period for Deferred MT-LR with event “Periodic Location”	17.9.0
2023-03	RAN#99	RP-230509	2937		F	Correction of table reference for NR Timing Advance	17.9.0
2023-03	RAN#99	RP-230517	2939	1	F	CR to 38.133 correction of measurement period requirements for positioning measurements	17.9.0
2023-03	RAN#99	RP-230517	2941	1	F	CR to 38.133 performance requirements for positioning measurements	17.9.0
2023-03	RAN#99	RP-230503	2945		A	CR on measurement requirements with per-FR gap R17	17.9.0
2023-03	RAN#99	RP-230506	2951		A	CR on positioning test cases R17	17.9.0
2023-03	RAN#99	RP-230506	2954		A	CR on positioning accuracy requirements R17	17.9.0
2023-03	RAN#99	RP-230516	2956	1	F	CR on pre-MG related requirements	17.9.0
2023-03	RAN#99	RP-230516	2958	1	F	CR on NCSG related requirements	17.9.0
2023-03	RAN#99	RP-230516	2960	1	F	CR on HO requirements for NTN	17.9.0
2023-03	RAN#99	RP-230516	2962	1	F	CR on MG requirements for NTN	17.9.0
2023-03	RAN#99	RP-230517	2964	1	F	CR on PRS measurement requirements for INACTIVE	17.9.0
2023-03	RAN#99	RP-230517	2968	1	F	CR on accuracy requirements for Rel-17 positioning	17.9.0
2023-03	RAN#99	RP-230515	2970	1	F	CR on requirements for UE Rx-Tx measurement for PDC	17.9.0
2023-03	RAN#99	RP-230515	2972		F	CR on TCs for PDC measurement	17.9.0
2023-03	RAN#99	RP-230519	2974	2	F	CR on SDT RRM test case for FR2	17.9.0
2023-03	RAN#99	RP-230507	2977	1	F	Correction to CBW change TCs_R17	17.9.0
2023-03	RAN#99	RP-230513	2983		A	CR on correction of eMIMO test cases R17	17.9.0
2023-03	RAN#99	RP-230514	2985	1	F	CR on maintaining RRM requirements for NR FeMIMO R17	17.9.0
2023-03	RAN#99	RP-230515	2989	2	F	CR on test cases for HST FR1	17.9.0
2023-03	RAN#99	RP-230518	2991	1	F	CR on NR RedCap Idle mode	17.9.0
2023-03	RAN#99	RP-230518	2993	2	F	CR on NR RedCap measurement	17.9.0
2023-03	RAN#99	RP-230518	3005	1	F	Corrections to cell reselection, CG-SDT for RedCap	17.9.0
2023-03	RAN#99	RP-230518	3007	1	F	Corrections to inter-frequency NR and inter-RAT E-UTRAN measurements for RedCap	17.9.0
2023-03	RAN#99	RP-230518	3013	1	F	Formal CR to Rel-17 TS 38.133: on missing Rel-16 relaxation for RedCap IDLE mode	17.9.0
2023-03	RAN#99	RP-230516	3017	1	F	CR on TS 38.133 (Rel-17) Corrections on cell reselection for NTN (CAT. F)	17.9.0
2023-03	RAN#99	RP-230519	3019	1	F	Formal CR to Rel-17 38.133: correction on CG-SDT transmission	17.9.0
2023-03	RAN#99	RP-230518	3021		F	Correction to RedCap test cases	17.9.0
2023-03	RAN#99	RP-230515	3027	1	F	CR to 38.133 on Rel-17 HST FR2 UL TX Timing	17.9.0
2023-03	RAN#99	RP-230507	3038		F	CR on SRS antenna port switching corrections in TS38.133 R17	17.9.0
2023-03	RAN#99	RP-230516	3042		F	CR Removal of editors note from concurrent gaps	17.9.0
2023-03	RAN#99	RP-230513	3043		F	Correction to FR1 band groups in 38.133	17.9.0
2023-03	RAN#99	RP-230513	3045	4	F	Conditions for missing FR2 band and power class for positioning in 38.133	17.9.0
2023-03	RAN#99	RP-230500	3050		A	Correction to Idle Mode CA/DC Measurement Tests in TS 38.133	17.9.0
2023-03	RAN#99	RP-230517	3058	1	F	CR - Correction to UE scheduling availability for PRS measurements without gaps	17.9.0
2023-03	RAN#99	RP-230510	3064	1	B	CR on TC - L1 RSRP measurement for beam reporting	17.9.0
2023-03	RAN#99	RP-230507	3069		A	CR on RLM OOS and IS tests with no DRX in NR-U standalone mode	17.9.0
2023-03	RAN#99	RP-230507	3070		A	CR on BFD and LR tests in NR-U standalone mode	17.9.0
2023-03	RAN#99	RP-230505	3078		A	CR to TS 38.133: Corrections to NR RRM test cases (Rel 17)	17.9.0
2023-03	RAN#99	RP-230506	3081		A	CR to TS 38.133: Corrections to NR positioning requirements (Rel 17)	17.9.0
2023-03	RAN#99	RP-230518	3083		F	CR to TS 38.133: Corrections to NR RedCap test cases (Rel 17)	17.9.0
2023-03	RAN#99	RP-230515	3085		F	FR2 HST TCI state switch test case maintenance CR	17.9.0
2023-03	RAN#99	RP-230518	3086	1	F	CR on active BWP switch test cases	17.9.0
2023-03	RAN#99	RP-230506	3094		A	CR to TS38.133: Revise the Measured quantity value(ZoA)	17.9.0
2023-03	RAN#99	RP-230506	3096		A	CR to TS38.133:Revise the abbreviation of AoA, A-AoA and ZoA	17.9.0
2023-03	RAN#99	RP-230511	3103		F	Big CR for NR NTN RRM performance requirements (Rel-17)	17.9.0

History

Document history		
V17.5.0	May 2022	Publication
V17.6.0	September 2022	Publication
V17.7.0	October 2022	Publication
V17.8.0	January 2023	Publication
V17.9.0	June 2023	Publication